

# FCC Radio Test Report

## FCC ID: 2BH7FC325WBV2

**Report No.** : BTL-FCCP-1-2410G026  
**Equipment** : Outdoor Security Wi-Fi Camera  
**Model Name** : Tapo C325WB  
**Brand Name** : tapo, tp-link  
**Applicant** : TP-Link Systems Inc.  
**Address** : 10 Mauchly, Irvine, CA 92618  
**Manufacturer** : TP-Link Systems Inc.  
**Address** : 10 Mauchly, Irvine, CA 92618  
  
**Radio Function** : Bluetooth Low Energy  
  
**FCC Rule Part(s)** : FCC CFR Title 47, Part 15, Subpart C (15.247)  
**Measurement** : ANSI C63.10-2013  
**Procedure(s)**  
  
**Date of Receipt** : 2025/1/22  
**Date of Test** : 2025/2/25~2025/3/21  
**Issued Date** : 2025/5/27

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

Ray Chen  
Ray Chen, Engineer



Approved by

Peter Chen  
Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: [www.newbtl.com](http://www.newbtl.com) Service mail: [btl\\_qa@newbtl.com](mailto:btl_qa@newbtl.com)

### Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

**Table of Contents**

	<b>Page</b>
<b>REVISION HISTORY</b>	<b>6</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	9
<b>2 . GENERAL INFORMATION</b>	<b>10</b>
2.1 GENERAL DESCRIPTION OF EUT	10
2.2 DESCRIPTION OF TEST MODES	12
2.3 PARAMETERS OF TEST SOFTWARE	12
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.5 SUPPORT UNITS	14
<b>3 . AC POWER LINE CONDUCTED EMISSIONS</b>	<b>15</b>
3.1 LIMIT	15
3.2 TEST PROCEDURE	15
3.3 DEVIATION FROM TEST STANDARD	15
3.4 TEST SETUP	16
3.5 EUT OPERATING CONDITIONS	16
3.6 TEST RESULTS	16
<b>4 . RADIATED EMISSIONS</b>	<b>17</b>
4.1 LIMIT	17
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	19
4.5 EUT OPERATING CONDITIONS	21
4.6 TEST RESULT - 9 KHZ TO 30 MHZ	21
4.7 TEST RESULT - 30 MHZ TO 1000 MHZ	21
4.8 TEST RESULT - ABOVE 1000 MHZ	21
<b>5 . BANDWIDTH</b>	<b>22</b>
5.1 LIMIT	22
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM STANDARD	22
5.4 TEST SETUP	22

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	22
5.6 TEST RESULTS	22
<b>6 . MAXIMUM OUTPUT POWER</b>	<b>23</b>
6.1 LIMIT	23
6.2 TEST PROCEDURE	23
6.3 DEVIATION FROM STANDARD	23
6.4 TEST SETUP	23
6.5 EUT OPERATION CONDITIONS	23
6.6 TEST RESULTS	23
<b>7 . CONDUCTED SPURIOUS EMISSION</b>	<b>24</b>
7.1 LIMIT	24
7.2 TEST PROCEDURE	24
7.3 DEVIATION FROM STANDARD	24
7.4 TEST SETUP	24
7.5 EUT OPERATION CONDITIONS	24
7.6 TEST RESULTS	24
<b>8 . POWER SPECTRAL DENSITY</b>	<b>25</b>
8.1 LIMIT	25
8.2 TEST PROCEDURE	25
8.3 DEVIATION FROM STANDARD	25
8.4 TEST SETUP	25
8.5 EUT OPERATION CONDITIONS	25
8.6 TEST RESULTS	25
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>26</b>
<b>10 . EUT TEST PHOTO</b>	<b>28</b>
<b>11 . EUT PHOTOS</b>	<b>28</b>
<b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>	<b>29</b>
<b>APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>	<b>32</b>
<b>APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>35</b>
<b>APPENDIX D - BANDWIDTH</b>	<b>46</b>
<b>APPENDIX E - MAXIMUM OUTPUT POWER</b>	<b>48</b>

**Table of Contents**

	<b>Page</b>
<b>APPENDIX F - CONDUCTED SPURIOUS EMISSION</b>	<b>50</b>
<b>APPENDIX G - POWER SPECTRAL DENSITY</b>	<b>52</b>

**REVISION HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2410G026	R00	Original Report.	2025/5/6	Invalid
BTL-FCCP-1-2410G026	R01	Modified the comments.	2025/5/22	Invalid
BTL-FCCP-1-2410G026	R02	Modified the comments.	2025/5/27	Valid

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX D	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX E	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX F	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX G	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

## 1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

1F,2F, No. 91, Ln. 298, Wengong 1st Rd., Guishan Dist., Taoyuan City 333001, Taiwan (FCC DN: TW0659)

C01       CB02       CB03  
 TR02

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k = 2$ , providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{cisp}$  requirement.

### A. AC Power Line Conducted Emissions Measurement:

Test Site	Method	Measurement Frequency Range	U (dB)
C01	CISPR	150 kHz ~ 30MHz	3.44

### B. Radiated emissions Measurement:

Test Site	Measurement Frequency Range	Ant. H / V	U,(dB)
CB02	0.03GHz ~ 1 GHz	H	1.54
	0.03GHz ~ 1 GHz	V	1.84

Test Site	Measurement Frequency Range	Ant. H / V	U,(dB)
CB03	0.009GHz ~ 0.03 GHz	-	1.42
	0.03GHz ~ 1 GHz	H	1.56
		V	1.96
	1 GHz ~ 6 GHz	H	2.36
		V	2.45
	6 GHz ~ 18 GHz	H	2.36
		V	2.31
	18 GHz ~ 40 GHz	-	2.07

### C. Other Measurement:

Test Item	U
Occupied Bandwidth	0.5334
Output power	0.3669
Power Spectral Density	0.6591
Conducted Spurious emissions	0.5416
Conducted Band edges	0.5348

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested By
AC Power Line Conducted Emissions	22°C, 65%	AC 120V/60Hz	Jason Yang
Radiated Emissions-30 MHz to 1000 MHz	20°C, 60%	DC 9V	Nero Hsieh
Radiated Emissions-Above 1000 MHz	19°C, 72%	DC 9V	Jason Yang
Bandwidth	23°C, 60%	DC 9V	Nero Hsieh
Maximum Output Power	23°C, 60%	DC 9V	Nero Hsieh
Conducted Spurious Emission	23°C, 60%	DC 9V	Nero Hsieh
Power Spectral Density	23°C, 60%	DC 9V	Nero Hsieh

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Outdoor Security Wi-Fi Camera
Brand Name	tp-link, tapo
Model Name	Tapo C325WB
Model Difference(s)	N/A
Software Version	2.X
Hardware Version	2.0
Power Source	1# DC Voltage supplied from AC adapter Model: T090060-2B6 2# PoE supply.
Power Rating	Input: 9V == 0.6A 802.3af/at PoE:36-57V 7W
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps
Max. Output Power	1Mbps: 7.33 dBm (0.0054 W)
Test Model	Tapo C325WB

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

### 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

## 3. Table for Filed Antenna:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)
1	TP-Link Systems Inc.	3101503989	Dipole	N/A	0.5
2	TP-Link Systems Inc.	3101503989	Dipole	N/A	0.5

## Note:

- (1) Smart antenna system with two transmit/receive chains, but operating in a mode where only one transmit/receive chain is used.
- (2) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

## 2.2 DESCRIPTION OF TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal	-	-
Transmitter Radiated Emissions (below 1GHz)	1Mbps	00	-
Transmitter Radiated Emissions (above 1GHz)	1Mbps	00/39	Bandedge
Transmitter Radiated Emissions (above 18GHz)		00/19/39	Harmonic
Bandwidth & Output Power & Conducted Spurious Emission & Power Spectral Density	1Mbps	00	-
		00/19/39	-

Note:

- (1) For AC power line conducted emissions and radiated emissions below 1 GHz test, the 1Mbps Channel 00 is found to be the worst case and recorded.
- (2) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (3) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (4) For radiated emission below 1GHz test, both AC Adapter supplied and PoE supplied had been tested, but only the worst case (AC Adapter supplied) is recorded.
- (5) EUT Ant. 1 and Ant.2 only have different directionality, and the links between antenna connection modules are the same. Both Ant. 1 and Ant.2 had been tested, but the data of Ant. 1 were the worst case, so only the data of Ant.1 had been recorded.


## 2.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


Test Software Version	AltobeamWLANFacility_V1.0.19		
Frequency (MHz)	2402	2440	2480
1Mbps	6	6	6

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emissions(below 1GHz) & AC power line conducted emissions

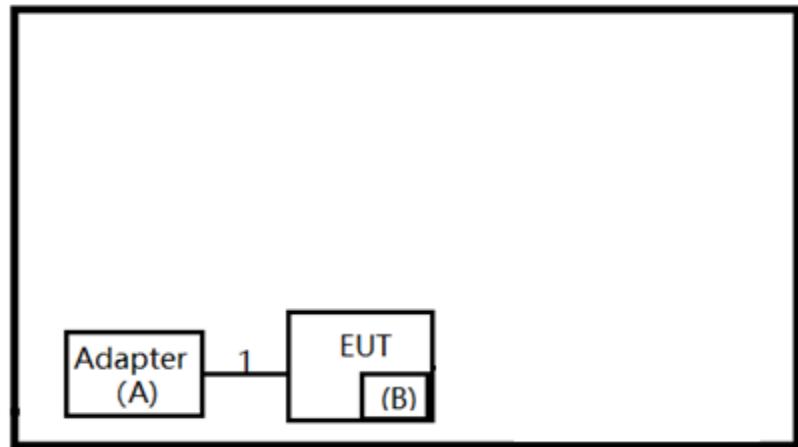

Radiated Emissions(above 1GHz)

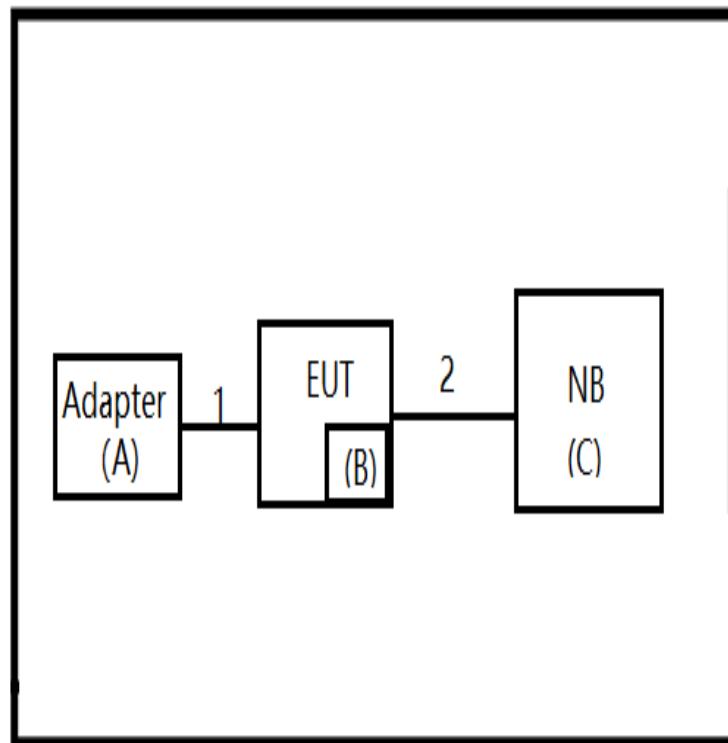

## 2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	tp-link	T090060-2B6	N/A	Supplied by test requester
B	SD Card	SanDisk	ZN6MA	N/A	Furnished by test lab
C	NB	dynabook	TECRA A40-J	N/A	Furnished by test lab

Item	Cable Type	Shielded	Ferrite Core	Length	Remarks
1	DC Cable	NO	NO	1.2m	Supplied by test requester
2	Test Fixture Cable	UART STC	CP2102	0.8m	Furnished by test lab

### 3. AC POWER LINE CONDUCTED EMISSIONS

#### 3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value – Limit Value

Calculation example:

Reading Level (dB $\mu$ V)		Correct Factor (dB)		Measurement Value (dB $\mu$ V)
38.22	+	3.45	=	41.67

Measurement Value (dB $\mu$ V)		Limit Value (dB $\mu$ V)		Margin Level (dB)
41.67	-	60	=	-18.33

#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation.

### 3.4 TEST SETUP

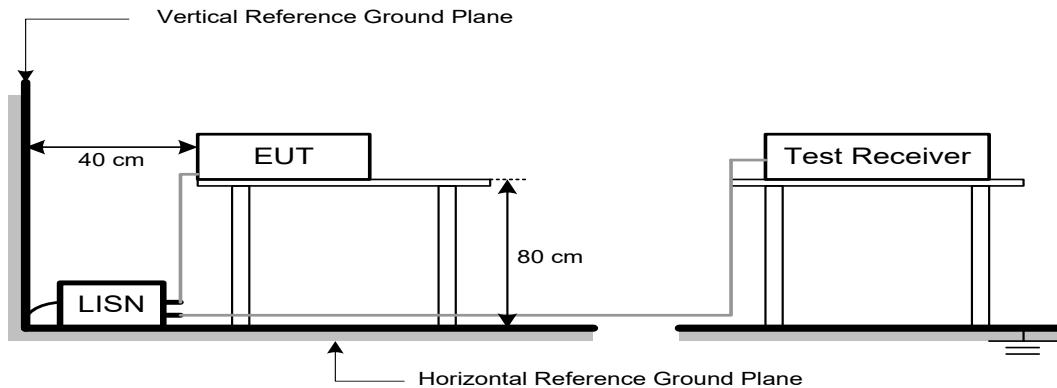

### 3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

## 4. RADIATED EMISSIONS

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dB $\mu$ V/m)		Harmonic at 1m (dB $\mu$ V/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB $\mu$ V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dB $\mu$ V)		Correct Factor (dB/m)		Measurement Value (dB $\mu$ V/m)
19.11	+	2.11	=	21.22

Measurement Value (dB $\mu$ V/m)		Limit Value (dB $\mu$ V/m)		Margin Level (dB)
21.22	-	54	=	-32.78

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left( \frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

20log (d<sub>limit</sub>/d<sub>measure</sub>)=20log (3/1)=9.5 dB.

FS<sub>limit</sub>: Harmonic at 3m Peak and Average limit.

FS<sub>max</sub>: Harmonic at 1m Peak and Average Maximum value.

d<sub>limit</sub>: Harmonic at 3m test distance.

d<sub>measure</sub>: Harmonic Actual test distance.

#### 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item – EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

#### 4.3 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.4 TEST SETUP


**9 kHz to 30 MHz**

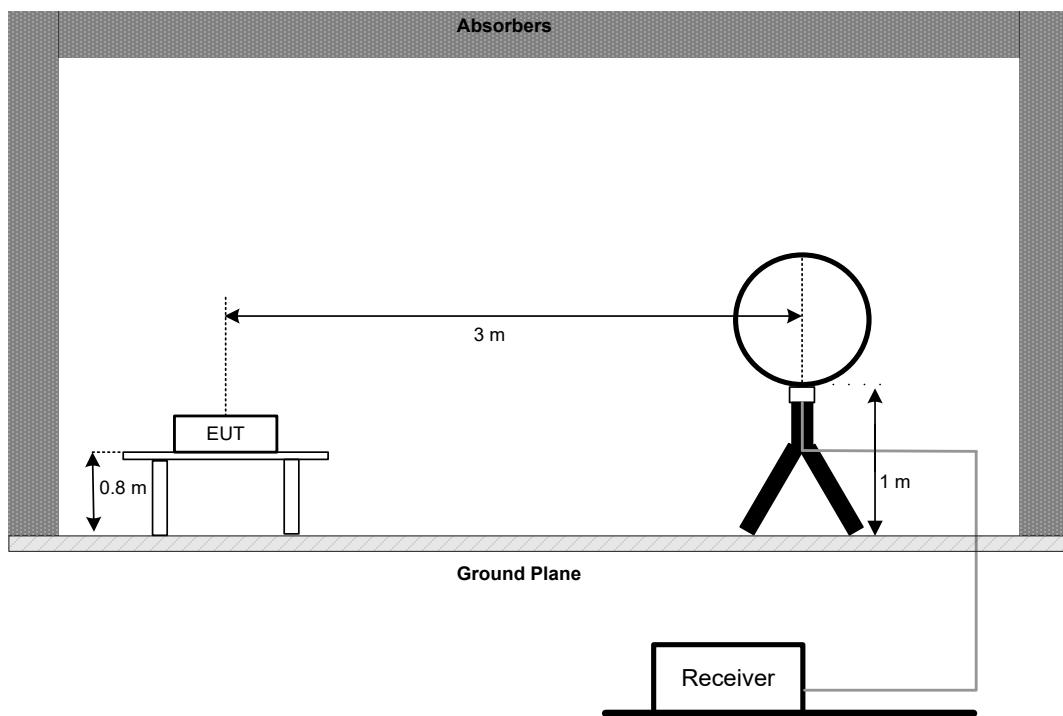


**30 MHz to 1 GHz**

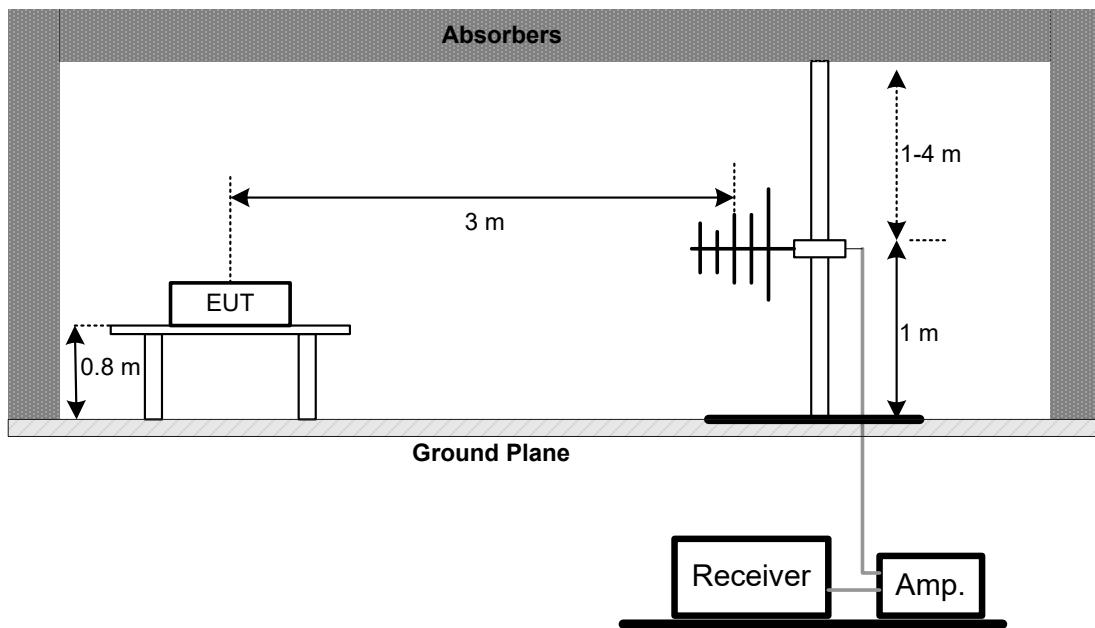


**Above 1 GHz**  
Band edge

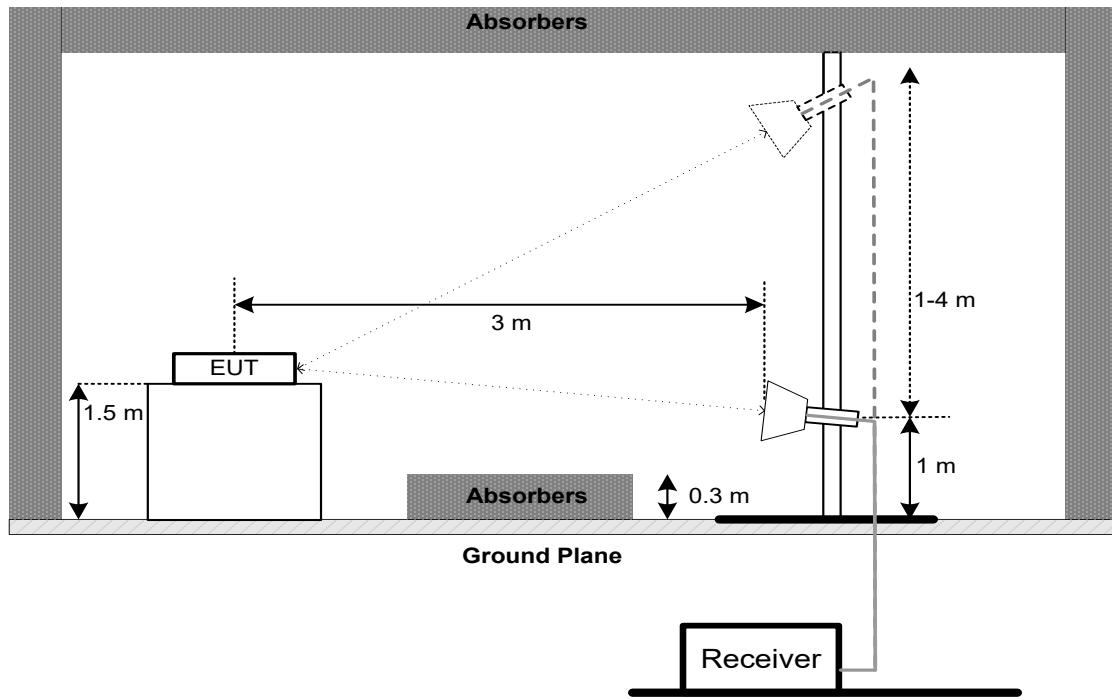

**Harmonic(1 GHz to 18 GHz)**

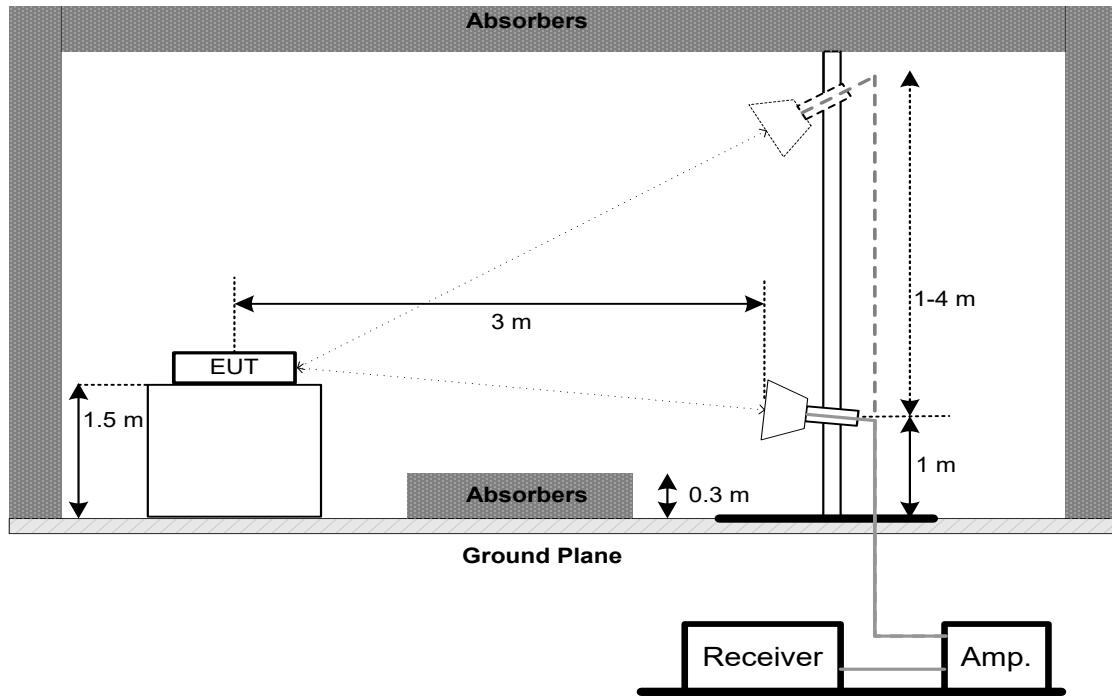

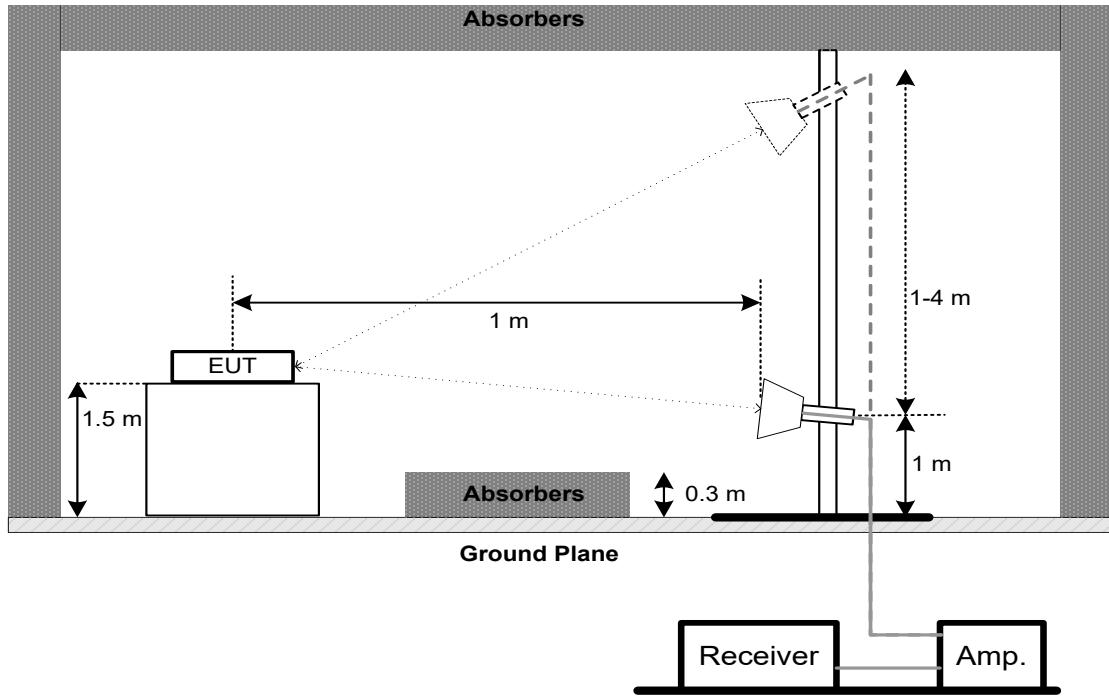**Harmonic(18 GHz to 26.5 GHz)****4.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**4.6 TEST RESULT - 9 kHz TO 30 MHz**

There were no emissions found below 30 MHz within 20 dB of the limit.

**4.7 TEST RESULT - 30 MHz TO 1000 MHz**

Please refer to the APPENDIX B.

**4.8 TEST RESULT - ABOVE 1000 MHz**

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. BANDWIDTH

### 5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	>= 500 kHz
	99% Emission Bandwidth	-

### 5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP



### 5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 5.6 TEST RESULTS

Please refer to the APPENDIX D.

## 6. MAXIMUM OUTPUT POWER

### 6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

### 6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	At least 1.5 times the OBW
RBW	1% to 5% of the OBW, not to exceed 1 MHz
VBW	$\geq 3 \times$ RBW
Detector	RMS
Trace	Max Hold
Sweep Time	$\leq$ (number of points in sweep) $\times$ T (Note)

Note: Where T is defined in 11.6 of ANSI C63.10-2013.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX E.

## 7. CONDUCTED SPURIOUS EMISSION

### 7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX F.

## 8. POWER SPECTRAL DENSITY

### 8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	2 MHz (1 Mbps)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 8.6 TEST RESULTS

Please refer to the APPENDIX G.

**9. MEASUREMENT INSTRUMENTS LIST**

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101339	2024/3/28	2025/3/27
2	Test Cable	EMCI	EMCRG142S-SM-SM-5000	230609	2024/8/10	2025/8/9
3	Test Cable	EMCI	EMC104-SM-SM-6000	240635	2024/7/15	2025/7/14
4	Measurement Software	Farad	EZ_EMC (Ver.E-LAB-5A2.2 2021)	N/A	N/A	N/A

Radiated Emissions - Below 1GHz						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	01577	2024/7/17	2025/7/16
2	Attenuator	EMCI	EMCI-N-6-05	AT-N0575	2024/7/17	2025/7/16
3	Pre-Amplifier	EMCI	EMC001330	980909	2024/8/9	2025/8/8
4	Test Cable	EMCI	EMC104-SM-SM-6000	230540	2024/8/10	2025/8/9
5	Test Cable	EMCI	EMC104-SM-SM-2500	230541	2024/8/10	2025/8/9
6	Test Cable	EMCI	EMC104-SM-SM-1000	230546	2024/8/10	2025/8/9
7	MXE EMI Receiver	Keysight	N9038A	MY50018009	2024/8/30	2025/8/29
8	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions - Above 1GHz						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Horn Antenna	RFSPIN	DRH18-E	KV2D01A18ES	2024/7/4	2025/7/3
2	Pre-Amplifier	EMCI	EMC118A45SE	980960	2024/7/23	2025/7/22
3	Test Cable	EMCI	EMC104-SM-SM-6000	230539	2024/7/23	2025/7/22
4	Test Cable	EMCI	EMC104-SM-SM-2500	230542	2024/7/23	2025/7/22
5	Test Cable	EMCI	EMC104-SM-SN-1000	230543	2024/7/23	2025/7/22
6	EXA Signal Analyzer	Keysight	N9010A	MY52220990	2024/10/4	2025/10/3
7	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

<b>Radiated Emissions - Above 18GHz</b>						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Horn Antenna	Schwarzbeck	BBHA 9170	01228	2024/6/12	2025/6/11
2	Pre-Amplifier	EMCI	EMC184045SE	980918	2024/8/9	2025/8/8
3	Test Cable	EMCI	EMC104-35M-35 M-1000	230547	2024/8/10	2025/8/9
4	Test Cable	EMCI	EMC104-35M-35 M-4700	230548	2024/8/10	2025/8/9
5	EXA Signal Analyzer	Keysight	N9010A	MY52220990	2024/10/4	2025/10/3
6	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

<b>Bandwidth &amp; Output Power &amp; Conducted Spurious Emission &amp; Power Spectral Density</b>						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	MXE EMI Receiver	Keysight	N9038A	MY50018009	2024/8/30	2025/8/29

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

**10. EUT TEST PHOTO**


Please refer to document Appendix No.: TP-2410G026-1 (APPENDIX-TEST PHOTOS).

**11. EUT PHOTOS**

Please refer to document Appendix No.: EP-2410G026-1 (APPENDIX-EUT PHOTOS).

## APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2025/3/11
Test Frequency	-	Phase	Line

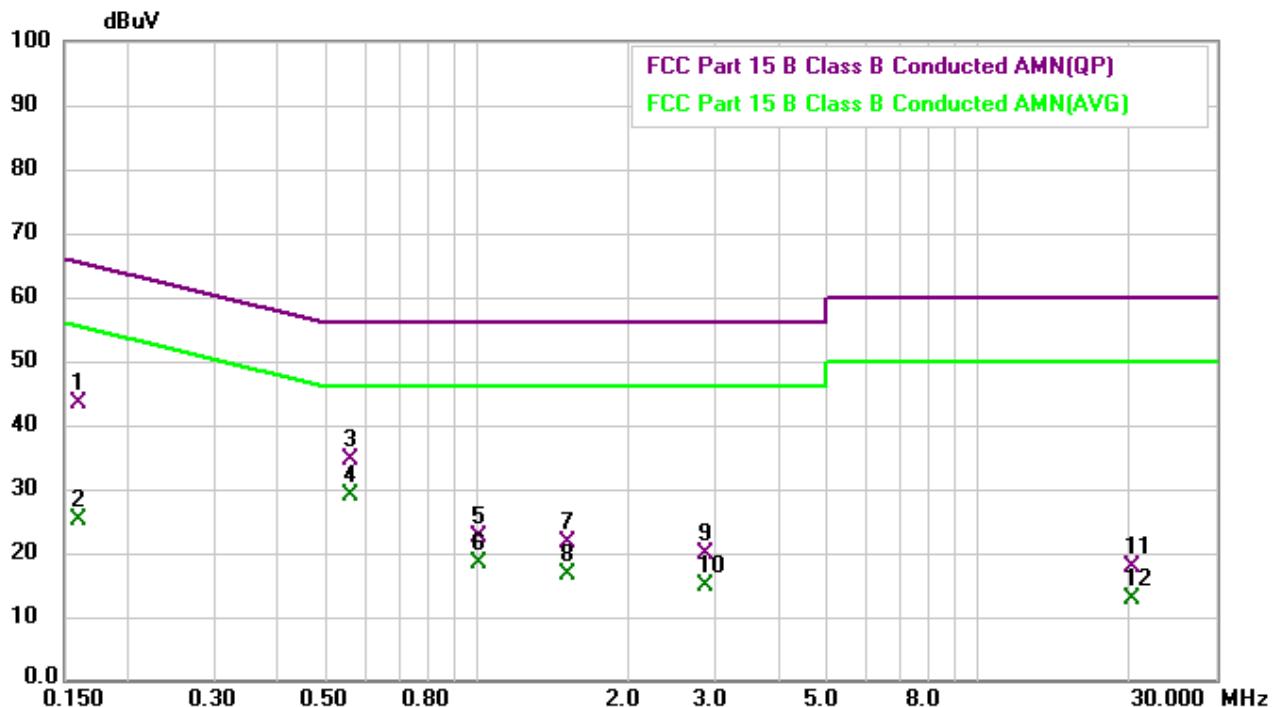


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Comment
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)		
1	0.160441	33.90	9.62	43.52	65.44	-21.92	QP	
2	0.160441	15.60	9.62	25.22	55.44	-30.22	AVG	
3	0.557250	24.90	9.64	34.54	56.00	-21.46	QP	
4	* 0.557250	19.20	9.64	28.84	46.00	-17.16	AVG	
5	1.009500	12.90	9.66	22.56	56.00	-33.44	QP	
6	1.009500	8.60	9.66	18.26	46.00	-27.74	AVG	
7	1.515750	11.90	9.68	21.58	56.00	-34.42	QP	
8	1.515750	7.00	9.68	16.68	46.00	-29.32	AVG	
9	2.859000	10.10	9.69	19.79	56.00	-36.21	QP	
10	2.859000	5.20	9.69	14.89	46.00	-31.11	AVG	
11	20.422500	7.90	9.80	17.70	60.00	-42.30	QP	
12	20.422500	2.90	9.80	12.70	50.00	-37.30	AVG	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2025/3/11
Test Frequency	-	Phase	Neutral

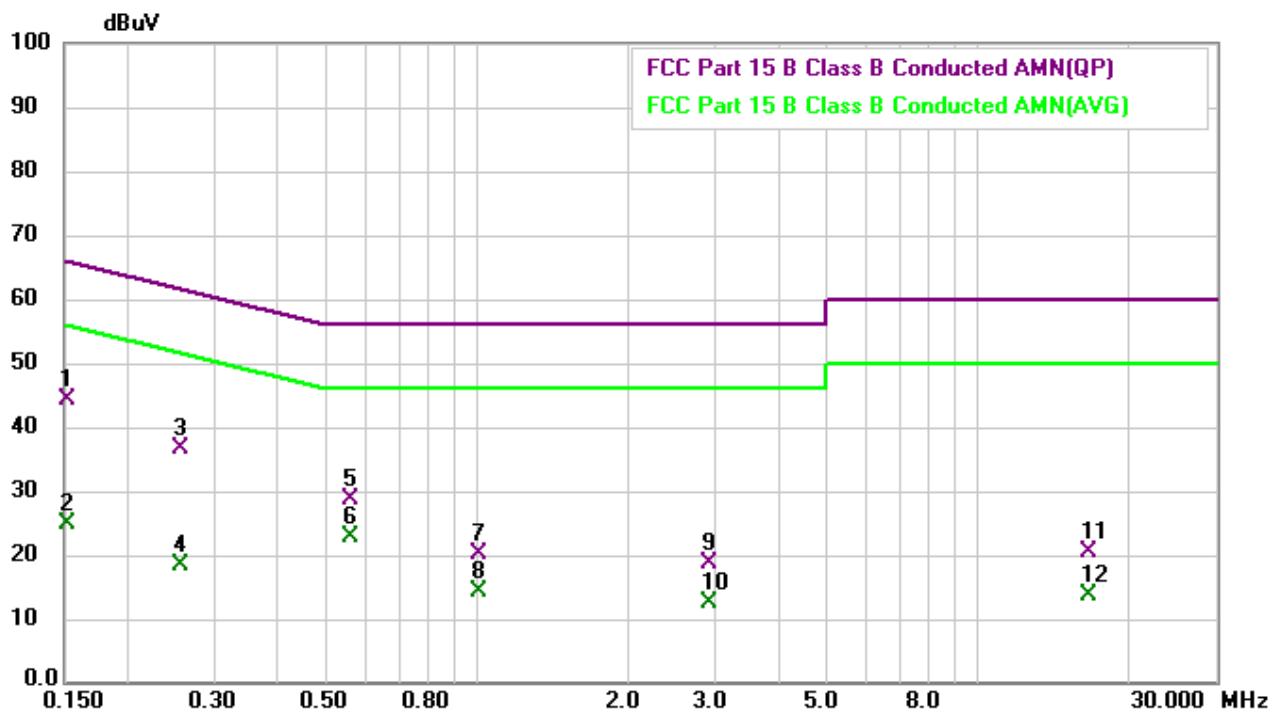


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Comment
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)		
1	0.152250	34.60	9.62	44.22	65.88	-21.66	QP	
2	0.152250	15.10	9.62	24.72	55.88	-31.16	AVG	
3	0.255067	27.10	9.63	36.73	61.59	-24.86	QP	
4	0.255067	8.70	9.63	18.33	51.59	-33.26	AVG	
5	0.559500	19.00	9.64	28.64	56.00	-27.36	QP	
6	0.559500	13.20	9.64	22.84	46.00	-23.16	AVG	
7	1.011750	10.50	9.65	20.15	56.00	-35.85	QP	
8	1.011750	4.70	9.65	14.35	46.00	-31.65	AVG	
9	2.917500	8.90	9.69	18.59	56.00	-37.41	QP	
10	2.917500	2.90	9.69	12.59	46.00	-33.41	AVG	
11	16.732500	10.60	9.87	20.47	60.00	-39.53	QP	
12	16.732500	3.90	9.87	13.77	50.00	-36.23	AVG	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

Test Mode	1Mbps	Test Date	2025/3/21
Test Frequency	2402 MHz	Polarization	Vertical

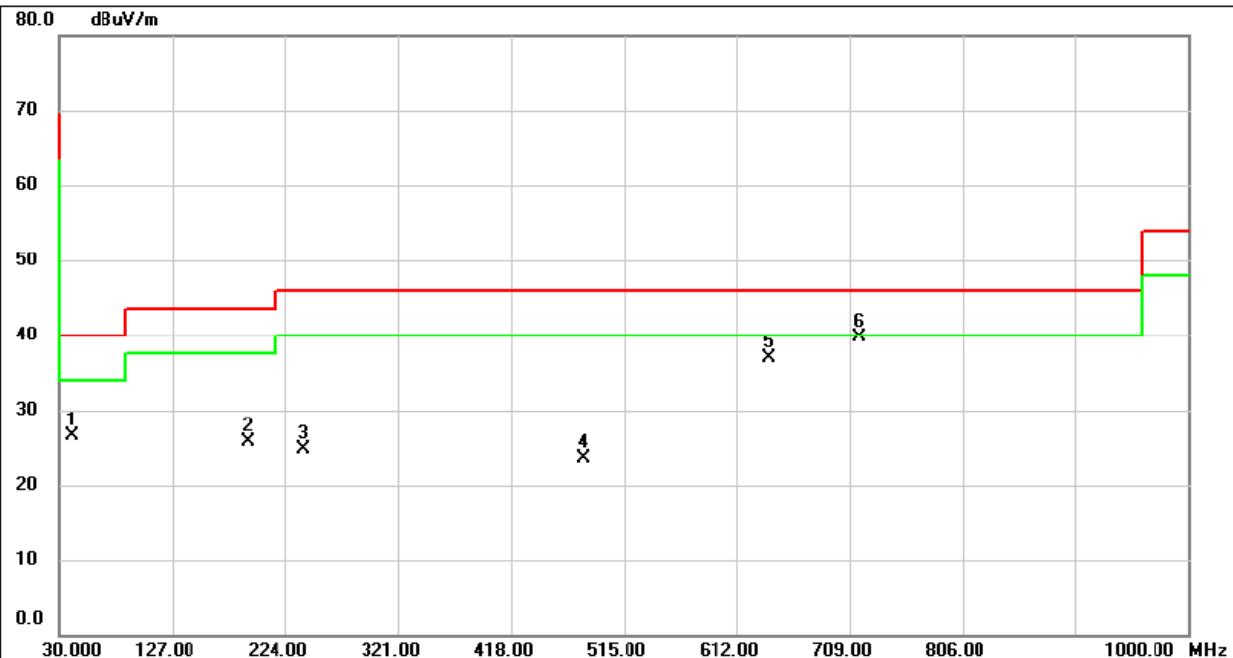


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment	
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)					
1	40.6700	39.64	-13.19	26.45	40.00	-13.55	peak	100	204		
2	191.9900	40.96	-15.33	25.63	43.50	-17.87	peak	100	344		
3	240.4900	38.56	-13.94	24.62	46.00	-21.38	peak	100	275		
4	480.0800	31.24	-7.75	23.49	46.00	-22.51	peak	100	281		
5	640.1300	41.59	-4.77	36.82	46.00	-9.18	peak	100	110		
6	*	716.7600	43.44	-3.64	39.80	46.00	-6.20	peak	100	176	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	1Mbps	Test Date	2025/3/21
Test Frequency	2402 MHz	Polarization	Horizontal

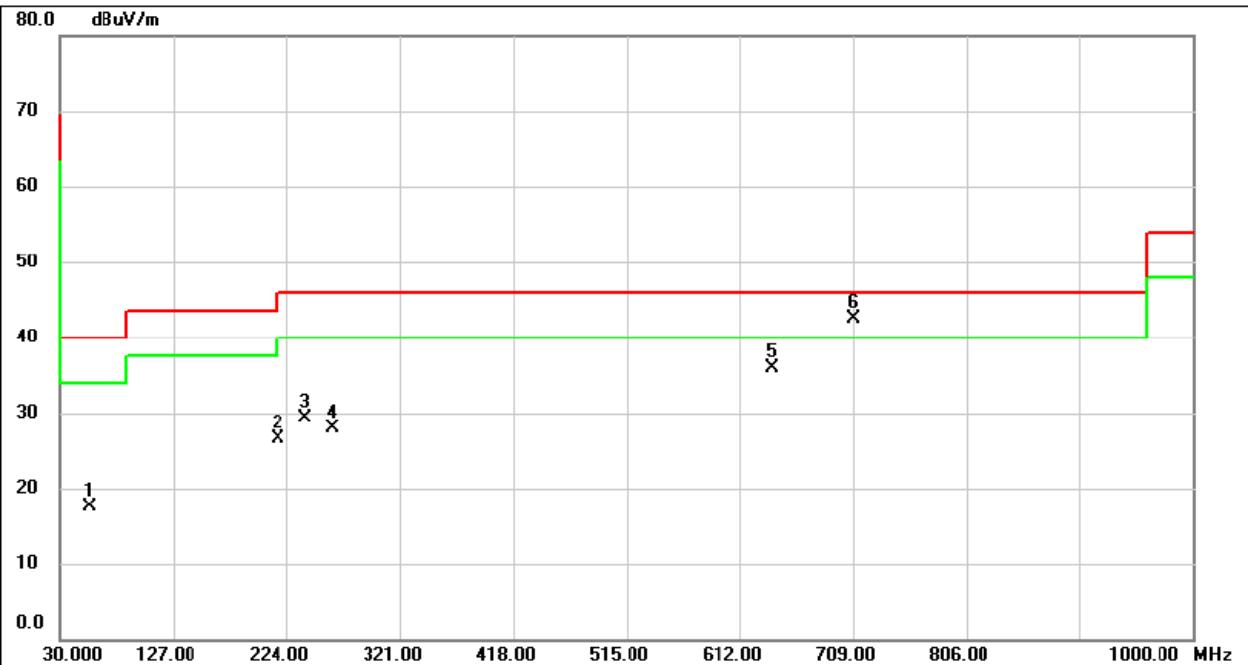


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment	
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)					
1	55.2200	30.31	-12.75	17.56	40.00	-22.44	peak	100	6		
2	216.2400	42.34	-15.89	26.45	46.00	-19.55	peak	100	256		
3	239.5200	43.26	-14.02	29.24	46.00	-16.76	peak	100	262		
4	263.7700	41.14	-13.23	27.91	46.00	-18.09	peak	100	114		
5	640.1300	40.65	-4.77	35.88	46.00	-10.12	peak	100	166		
6	*	709.0000	46.37	-3.83	42.54	46.00	-3.46	peak	100	92	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ**


Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2402 MHz	Polarization	Horizontal

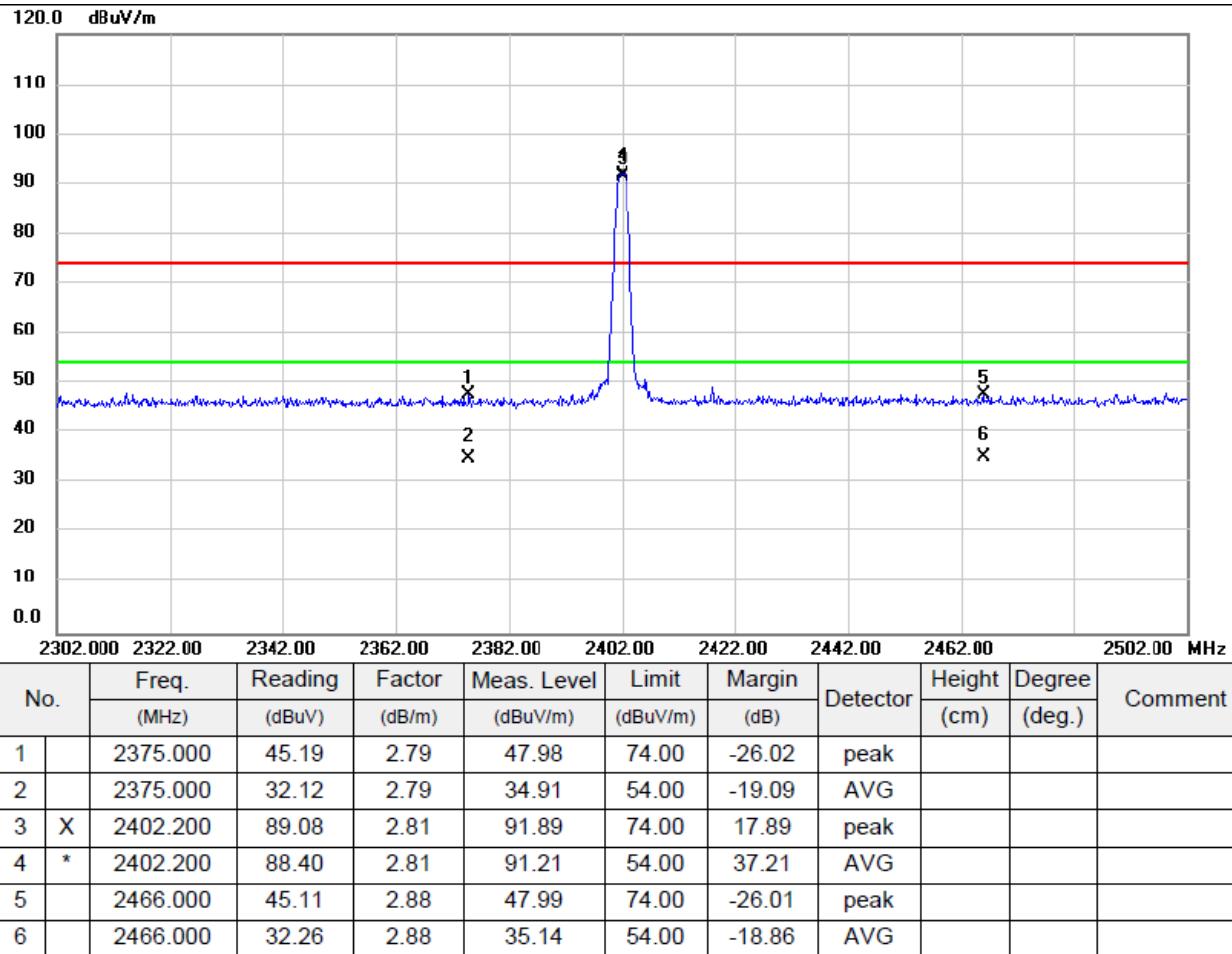

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2480 MHz	Polarization	Horizontal

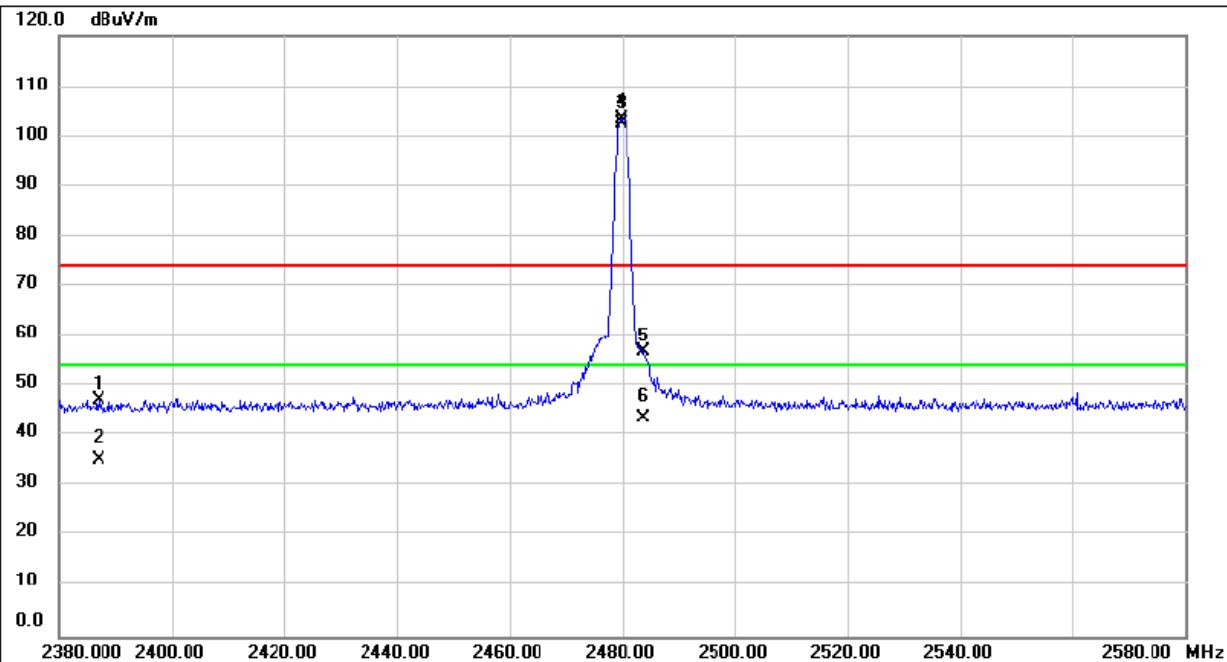

No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)				
1	2387.000	44.46	2.80	47.26	74.00	-26.74	peak			
2	2387.000	32.34	2.80	35.14	54.00	-18.86	AVG			
3	X 2479.800	100.53	2.89	103.42	74.00	29.42	peak			
4	* 2479.800	99.56	2.89	102.45	54.00	48.45	AVG			
5	2483.800	53.82	2.89	56.71	74.00	-17.29	peak			
6	2483.800	40.63	2.89	43.52	54.00	-10.48	AVG			

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2402 MHz	Polarization	Vertical



## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2402 MHz	Polarization	Horizontal

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2440 MHz	Polarization	Vertical



## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2440 MHz	Polarization	Horizontal

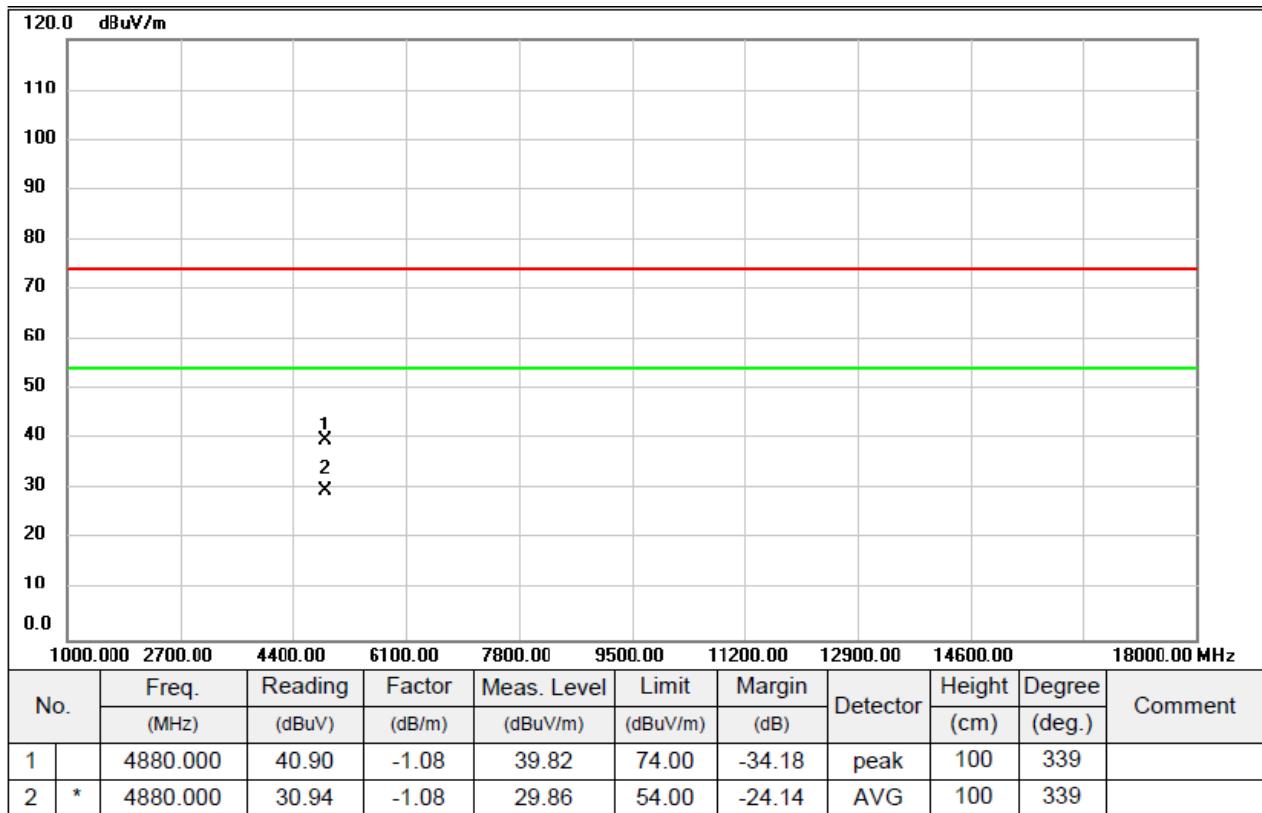**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2480 MHz	Polarization	Vertical

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2480 MHz	Polarization	Horizontal


**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2402 MHz	Polarization	Vertical


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	1Mbps	Test Date	2025/3/15
Test Frequency	2402 MHz	Polarization	Horizontal

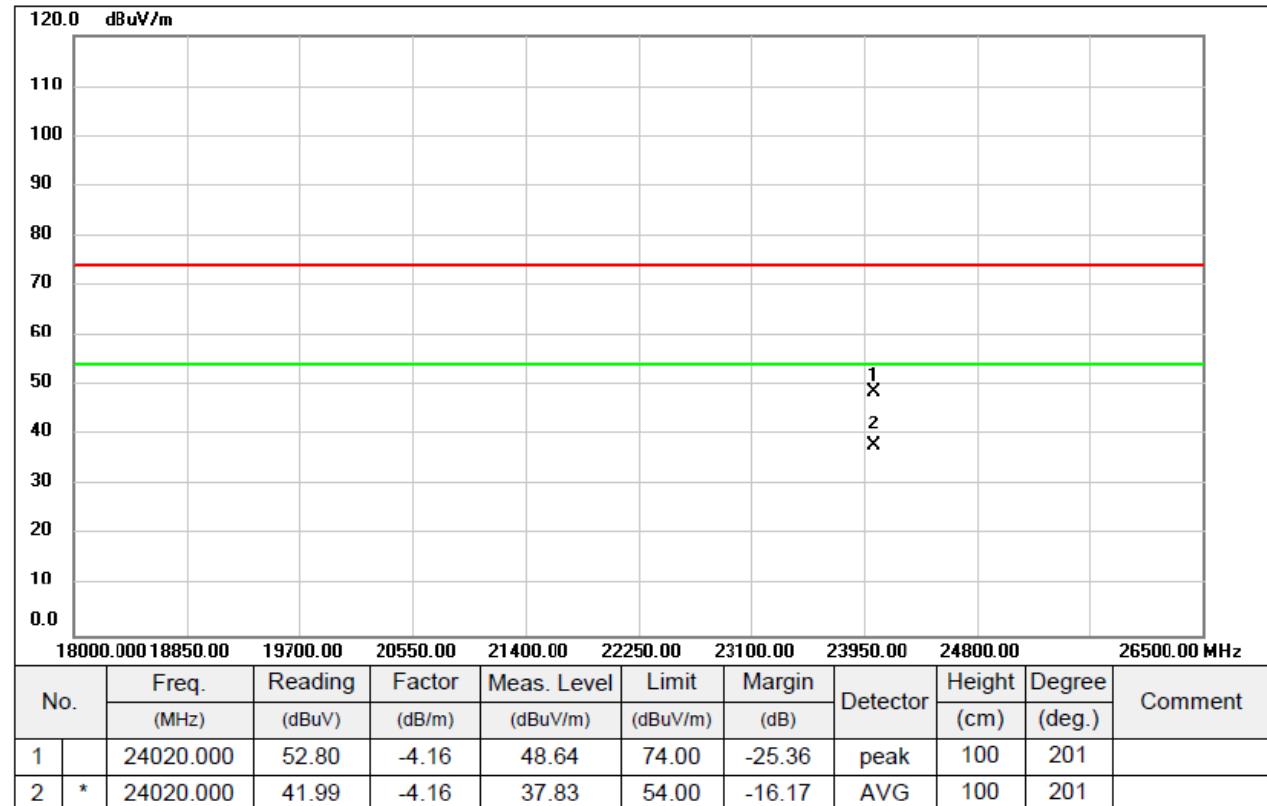
**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX D - BANDWIDTH


Test Mode TX Mode \_1Mbps

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.668	1.028	0.5	Pass
19	2440	0.665	1.028	0.5	Pass
39	2480	0.669	1.024	0.5	Pass

CH00




CH19  
6 dB Bandwidth

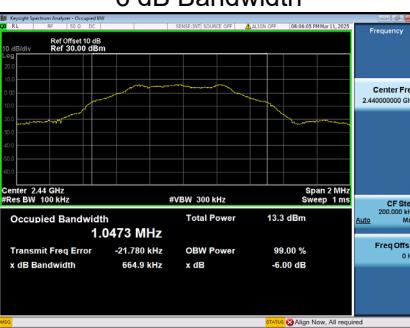

CH39



99 % Occupied Bandwidth

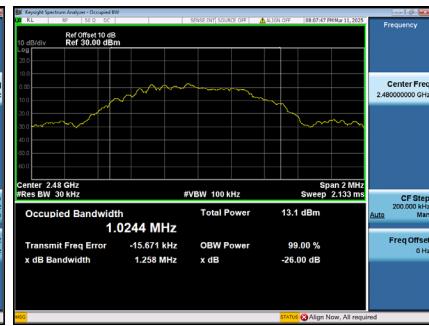

## APPENDIX E - MAXIMUM OUTPUT POWER

Test Mode	TX Mode _1Mbps
-----------	----------------


Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	7.33	0.0054	30.00	1.0000	Pass
2440	7.30	0.0054	30.00	1.0000	Pass
2480	7.21	0.0053	30.00	1.0000	Pass

Note: Output power = Measure result + Cable loss


CH00



CH19

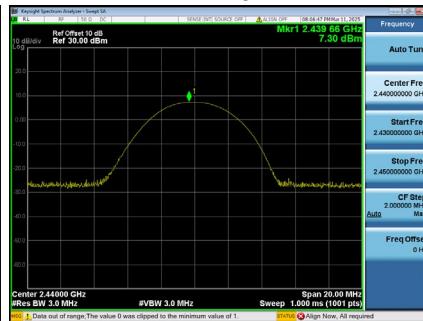

CH39

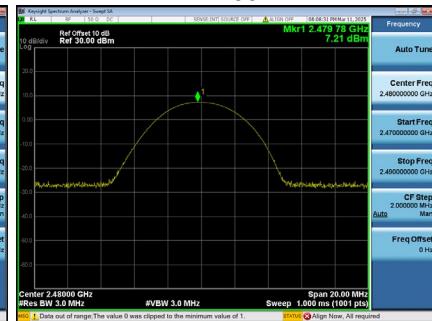


## APPENDIX F - CONDUCTED SPURIOUS EMISSION


Test Mode

TX Mode \_1Mbps


## Bandedge CH00 (Lower)

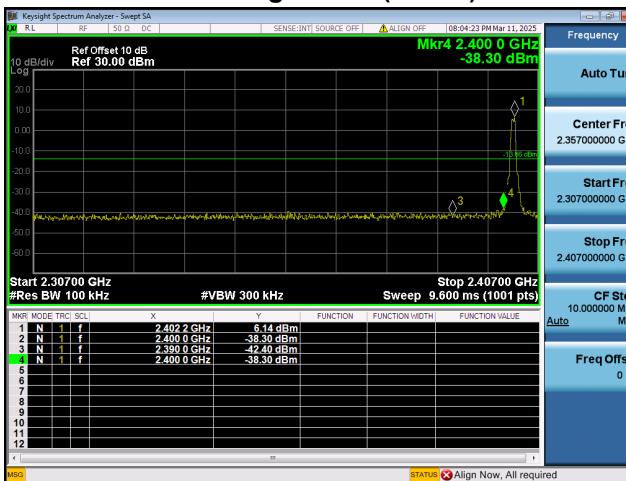


## Bandedge CH39 (Upper)

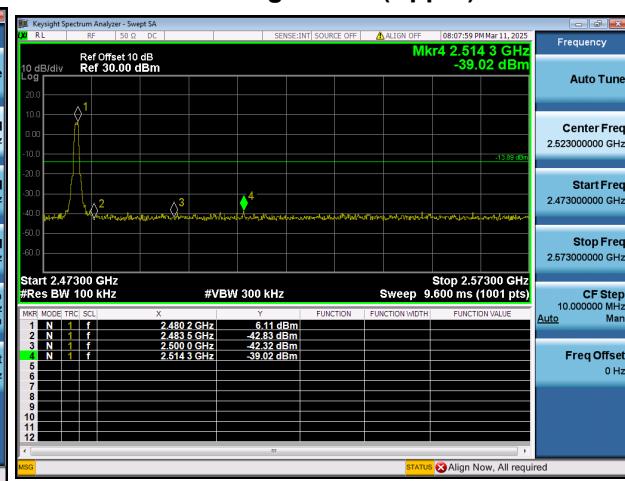


## CH00 – 10th Harmonic of the fundamental frequency

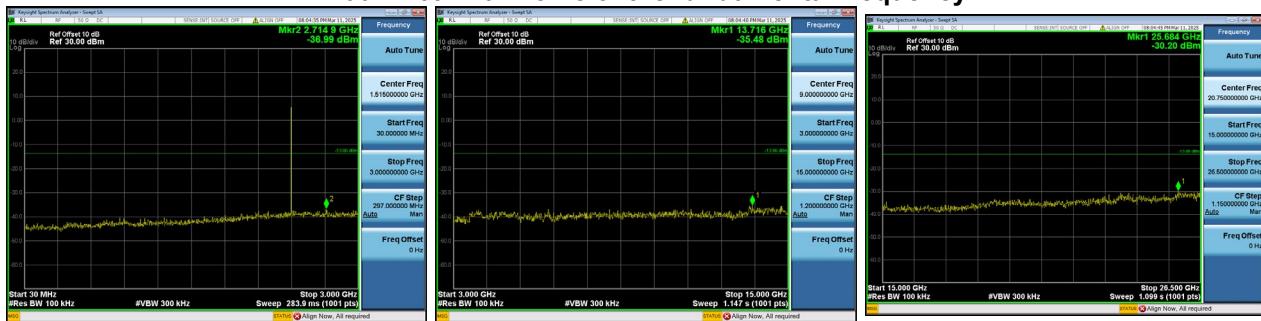

## CH19 – 10th Harmonic of the fundamental frequency

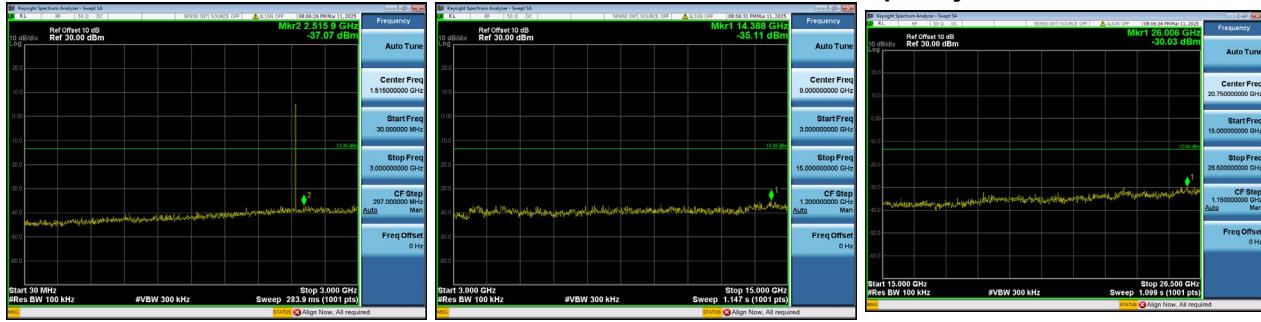



## CH39 – 10th Harmonic of the fundamental frequency

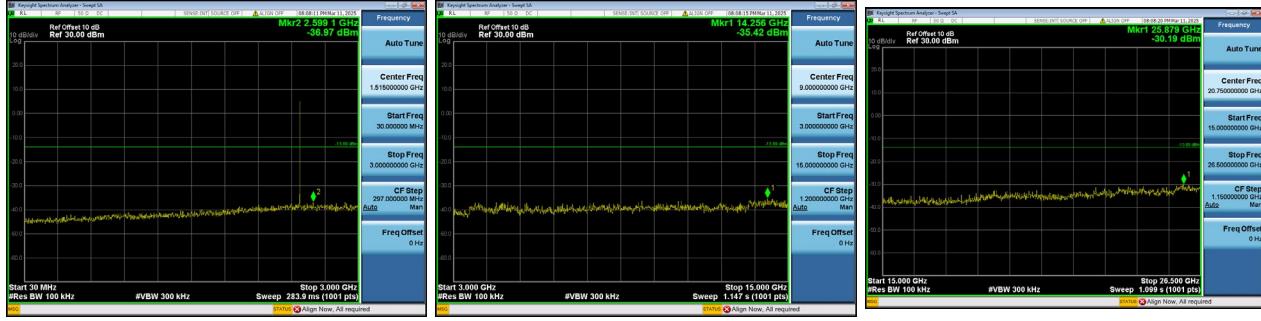

## APPENDIX G - POWER SPECTRAL DENSITY

Test Mode TX Mode \_1Mbps

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	-8.45	8.00	Pass
19	2440	-8.46	8.00	Pass
39	2480	-8.53	8.00	Pass

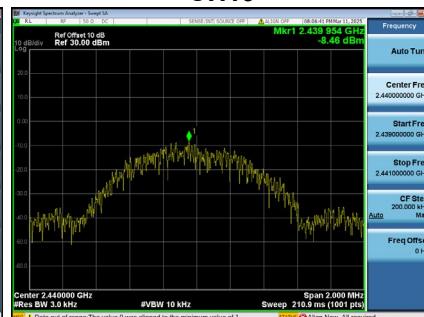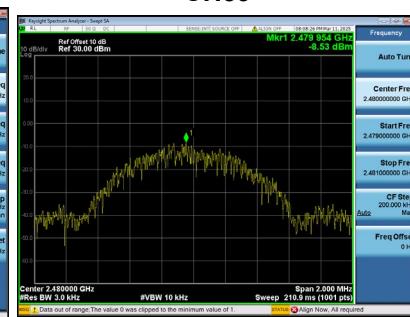**CH00****CH19****CH39****End of Test Report**