

FCC Radio Test Report

FCC ID: 2BH7FC560WS

Report No. : BTL-FCCP-3-2502G022A
Equipment : Outdoor Pan/Tilt Security Wi-Fi Camera
Model Name : Tapo C560WS, TC46
Brand Name : tp-link, tapo
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618

Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2A, U-NII 2C, U-NII 3)

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart E (15.407)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2025/4/18
Date of Test : 2025/4/25 ~ 2025/6/12
Issued Date : 2025/7/10

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Poken Huang

Prepared by : _____
Poken Huang, Engineer

Approved by : _____
Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
1.4 DUTY CYCLE	8
2 GENERAL INFORMATION	10
2.1 DESCRIPTION OF EUT	10
2.2 TEST MODES	13
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
2.4 SUPPORT UNITS	15
3 AC POWER LINE CONDUCTED EMISSIONS TEST	16
3.1 LIMIT	16
3.2 TEST PROCEDURE	16
3.3 DEVIATION FROM TEST STANDARD	16
3.4 TEST SETUP	17
3.5 TEST RESULT	17
4 RADIATED EMISSIONS TEST	18
4.1 LIMIT	18
4.2 TEST PROCEDURE	19
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	20
4.5 EUT OPERATING CONDITIONS	21
4.6 TEST RESULT – BELOW 30 MHZ	21
4.7 TEST RESULT – 30 MHZ TO 1 GHZ	21
4.8 TEST RESULT – ABOVE 1 GHZ	21
5 BANDWIDTH TEST	22
5.1 LIMIT	22
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM TEST STANDARD	22
5.4 TEST SETUP	22
5.5 EUT OPERATING CONDITIONS	22
5.6 TEST RESULT	22
6 OUTPUT POWER TEST	23
6.1 LIMIT	23
6.2 TEST PROCEDURE	23
6.3 DEVIATION FROM TEST STANDARD	23
6.4 TEST SETUP	23
6.5 EUT OPERATING CONDITIONS	23
6.6 TEST RESULT	23
7 POWER SPECTRAL DENSITY	24
7.1 LIMIT	24
7.2 TEST PROCEDURE	24
7.3 DEVIATION FROM TEST STANDARD	24
7.4 TEST SETUP	24
7.5 EUT OPERATING CONDITIONS	24
7.6 TEST RESULT	24

8	LIST OF MEASURING EQUIPMENTS	25
9	EUT TEST PHOTO	27
10	EUT PHOTOS	27
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	28
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	33
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	36
APPENDIX D	BANDWIDTH	238
APPENDIX E	OUTPUT POWER	271
APPENDIX F	POWER SPECTRAL DENSITY	276

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-3-2502G022A	R00	Original Report.	2025/7/10	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX D	Pass	-----
15.407(a)	Output Power	APPENDIX E	Pass	-----
15.407(a)	Power Spectral Density	APPENDIX F	Pass	-----
15.407(g)	Frequency Stability	-----	NOTE (5)	-----
15.203	Antenna Requirement	-----	Pass	NOTE (4)
15.407(c)	Automatically Discontinue Transmission	-----	Pass	NOTE (3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) The device what use replaceable antennas with non-standard interfaces are considered sufficient to comply with the provisions of 15.203.
- (5) The item is declared by the manufacturer.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (FCC DN: TW0659)

☒ C01 ☒ CB20

No. 68-2, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (FCC DN: TW0659)

☒ SR06

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C01	CISPR	150 kHz ~ 30MHz	2.4498

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U, (dB)
CB20	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test:

Test Item	U
Occupied Bandwidth	0.83 %
Output power	0.8909 dB
Power Spectral Density	0.8903 dB
Conducted Spurious emissions	1.8304 dB
Conducted Band edges	1.8338 dB
Frequency Stability	166.77 Hz

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS


Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25°C, 50%	AC 120 V	Benny Cao
Radiated emissions below 1 GHz	25°C, 65%	AC 120 V	Ken Lu
Radiated emissions above 1 GHz	Refer to the data	AC 120 V	Ken Lu
Bandwidth	25°C, 55%	AC 120 V	Cheng Tsai
Output Power	25°C, 55%	AC 120 V	Cheng Tsai
Power Spectral Density	25°C, 55%	AC 120 V	Cheng Tsai

1.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11a	5.386	1	5.386	5.486	98.18%	0.08
IEEE 802.11ac (VHT20)	4.488	1	4.488	4.598	97.61%	0.11
IEEE 802.11ac (VHT40)	2.176	1	2.176	2.28	95.44%	0.20
IEEE 802.11ac (VHT80)	1.49	1	1.490	1.56	95.51%	0.20
IEEE 802.11ax (HE20)	0.56	1	0.560	0.56	100.00%	0.00
IEEE 802.11ax (HE40)	2.849	1	2.849	2.882	98.85%	0.05
IEEE 802.11ax (HE80)	0.77	1	0.770	0.77	100.00%	0.00

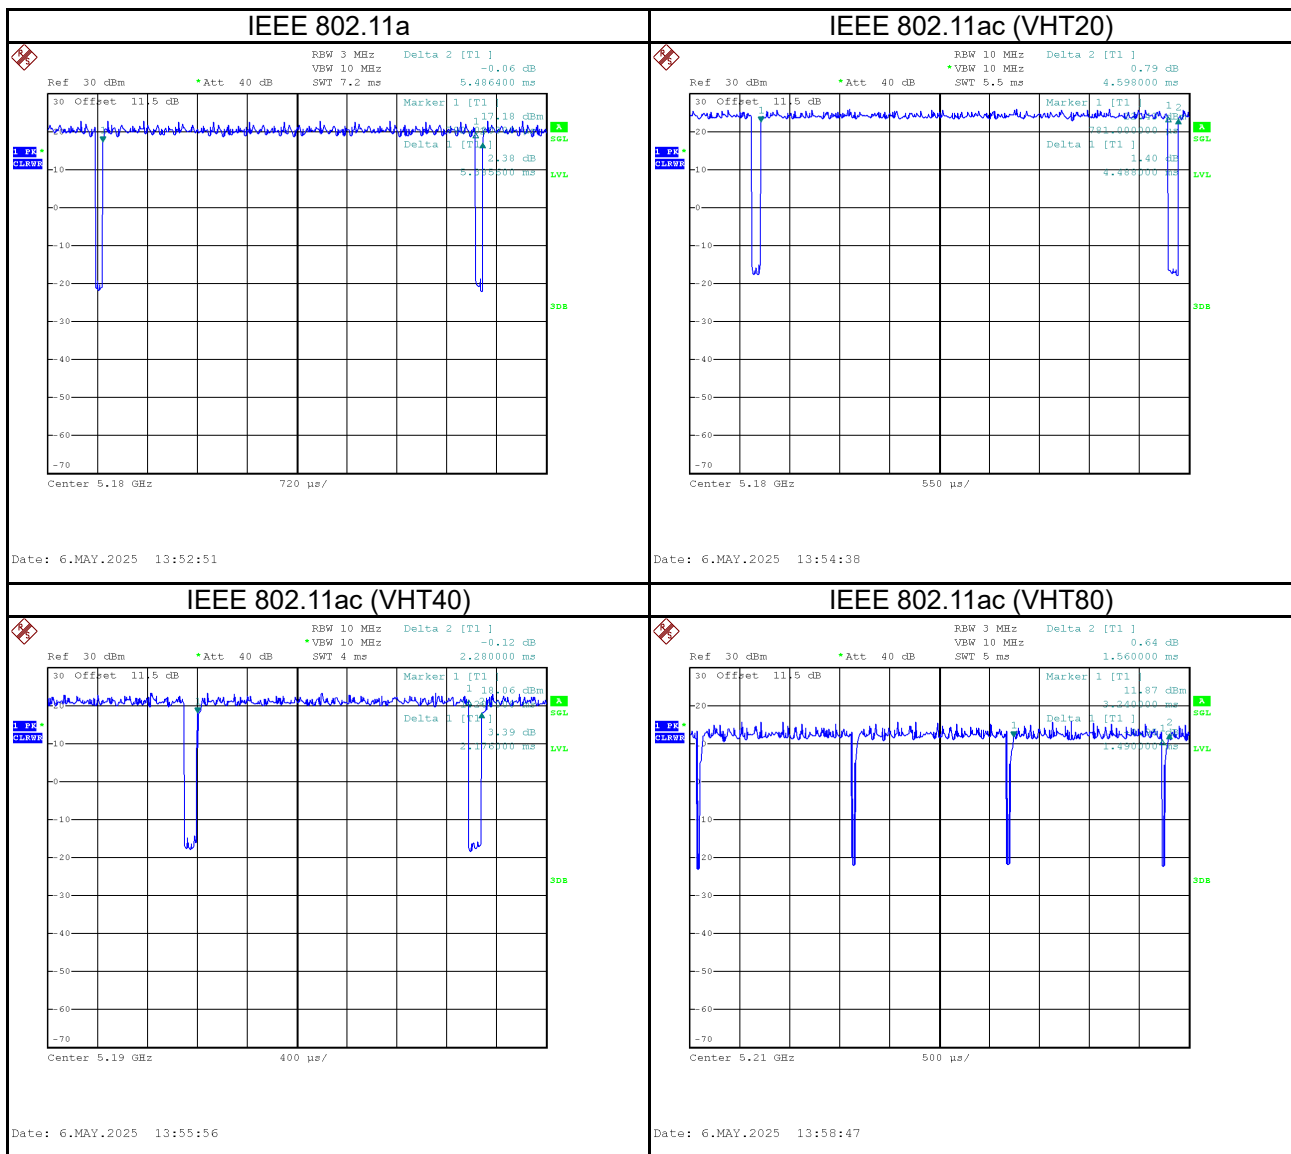


IEEE 802.11ax (HE20)

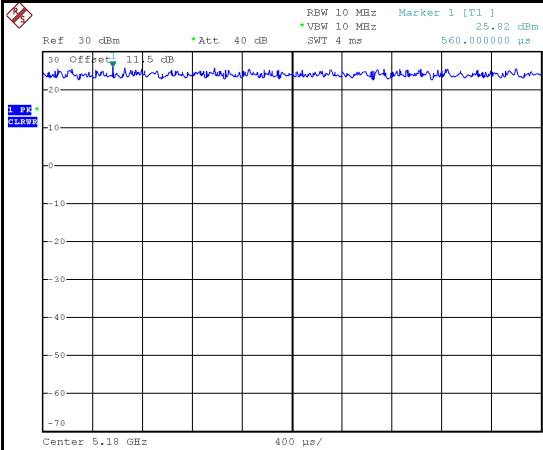


Date: 6.MAY.2025 14:01:16

IEEE 802.11ax (HE40)

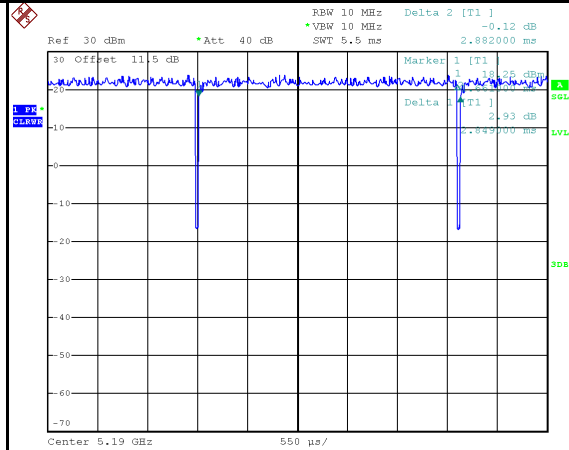

Date: 6.MAY.2025 14:02:40

IEEE 802.11ax (HE80)

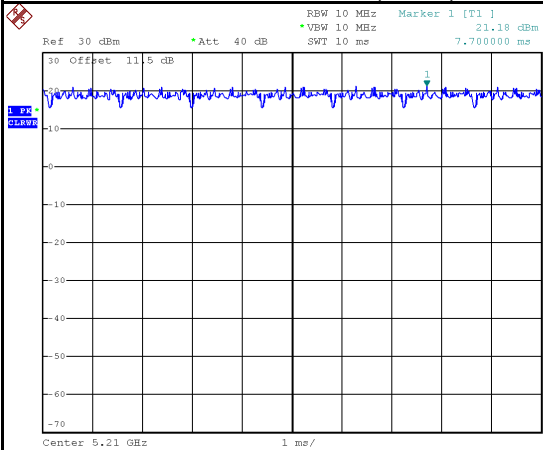

Date: 6.MAY.2025 14:03:49

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Outdoor Pan/Tilt Security Wi-Fi Camera
Brand Name	tp-link, tapo
Model Name	Tapo C560WS, TC46
Model Difference	Only the model name is different.
Hardware Version	1.0
Software Version	1.X
Power Source	DC voltage supplied from AC adapter. Model: T120100-2B1
Power Rating	I/P: 100-240V~, 50/60Hz, 0.3A O/P: 12V --- 1A
Operation Bands	UNII-1: 5150 MHz to 5250 MHz UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz UNII-3: 5725 MHz to 5850 MHz
Operation Frequency	UNII-1: 5180 MHz to 5250 MHz UNII-2A: 5250 MHz to 5320 MHz UNII-2C: 5500 MHz to 5700 MHz UNII-3: 5745 MHz to 5825 MHz
Modulation Technology	OFDM, OFDMA
Transfer Rate	IEEE 802.11a: 6/9/12/18/24/36/48/54 Mbps IEEE 802.11n: up to 150 Mbps IEEE 802.11ac: up to 433.3 Mbps IEEE 802.11ax: up to 600.5 Mbps
Output Power Max. for UNII-1	IEEE 802.11ac(VHT40): 20.35 dBm (0.1084 W)
Output Power Max. for UNII-2A	IEEE 802.11ac(VHT40): 20.27 dBm (0.1064 W)
Output Power Max. for UNII-2C	IEEE 802.11ac(VHT40): 20.26 dBm (0.1062 W)
Output Power Max. for UNII-3	IEEE 802.11ac(VHT40): 20.43 dBm (0.1104 W)
Test Model	Tapo C560WS
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax (HE80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax (HE80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax (HE80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax (HE80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

(3) Table for Filed Antenna:

Ant.	Brand Name	P/N	Type	Connector	Gain (dBi)
1	tp-link	Tapo C560WS 1.0	Dipole	N/A	0.5
2	tp-link	Tapo C560WS 1.0	Dipole	N/A	0.5

Note: Smart antenna system with two transmit/receive chains, but operating in a mode where only one transmit/receive chain is used.

- (4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_ IEEE 802.11ac (VHT40)	159	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_ IEEE 802.11a	36/48, 52/64 100/140/144, 149/165	Bandedge
	TX Mode_ IEEE 802.11ac (VHT20)		
	TX Mode_ IEEE 802.11ax (HE20)		
	TX Mode_ IEEE 802.11ac (VHT40)	38/46, 54/62 102/134, 151/159	
	TX Mode_ IEEE 802.11ax (HE40)		
	TX Mode_ IEEE 802.11ac (VHT80)	42, 58	
	TX Mode_ IEEE 802.11ax (HE80)	106, 122, 155	
	TX Mode_ IEEE 802.11a	36/40/48 52/60/64 100/116/140/144	Harmonic
	TX Mode_ IEEE 802.11ac (VHT20)	149/157/165	
	TX Mode_ IEEE 802.11ax (HE20)		
	TX Mode_ IEEE 802.11ac (VHT40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ax (HE40)		
	TX Mode_ IEEE 802.11ac (VHT80)	42, 58	
	TX Mode_ IEEE 802.11ax (HE80)	106/122/138, 155	
Transmitter Radiated Emissions (above 18GHz)	TX Mode_ IEEE 802.11ac (VHT40)	159	-
Bandwidth	TX Mode_ IEEE 802.11a	36/40/48 52/60/64 100/116/140/144	-
	TX Mode_ IEEE 802.11ac (VHT20)	149/157/165	
	TX Mode_ IEEE 802.11ax (HE20)		
	TX Mode_ IEEE 802.11ac (VHT40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ax (HE40)		
	TX Mode_ IEEE 802.11ac (VHT80)	42, 58	
	TX Mode_ IEEE 802.11ax (HE80)	106/122/138, 155	
Power Spectral Density & Output Power	TX Mode_ IEEE 802.11a	36/40/48 52/60/64 100/116/140/144	-
	TX Mode_ IEEE 802.11ac (VHT20)	149/157/165	
	TX Mode_ IEEE 802.11ax (HE20)		
	TX Mode_ IEEE 802.11ac (VHT40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ax (HE40)		
	TX Mode_ IEEE 802.11ac (VHT80)	42, 58 106/122/138, 155	


NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (2) HT20/HT40 covers VHT20/VHT40, due to same modulation. The power setting for 802.11ac VHT20 and VHT40 are the same or lower than 802.11n HT20 and HT40.
- (3) For radiated emission above 18GHz test, only tested and recorded the worst case.
- (4) For radiated emission below 1 GHz test, the TX AC (VHT40) Mode Channel 159 is found to be the worst case and recorded.
- (5) The electric field intensity signal emitted at 9 kHz - 30 MHz is too weak (20 dB below the limit), so the measured value is not recorded in this report.
- (6) EUT Ant.1 and Ant.2 only have different directionality, and the links between antenna connection modules are the same. Both Ant. 1 and Ant.2 had been tested, but the data of Ant. 1 were the worst case, so only the data of Ant.1 had been recorded in this report.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

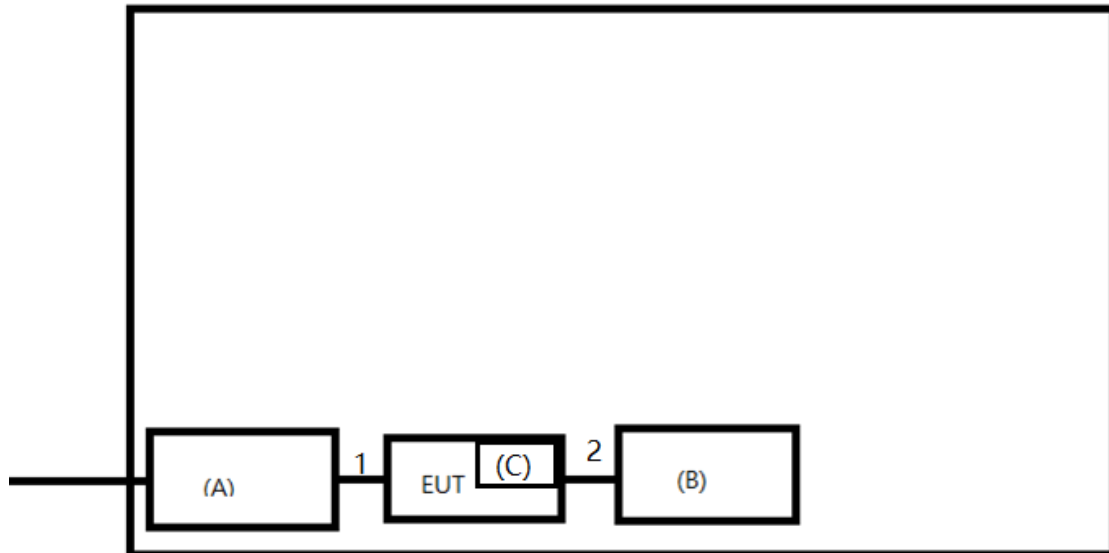

Radiated Emissions

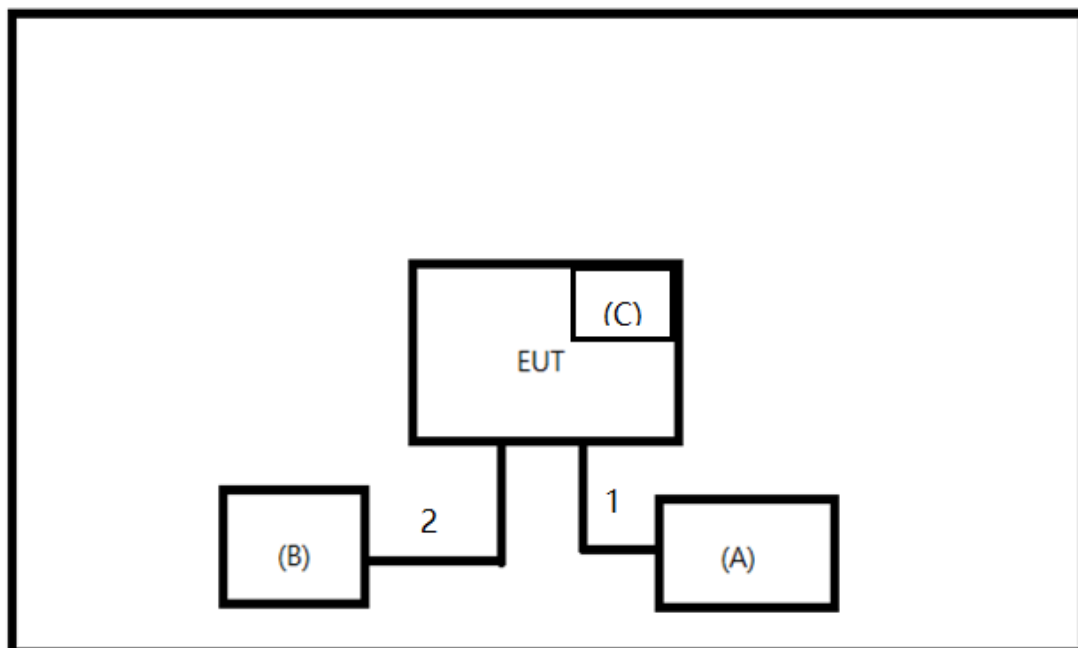

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	tp-link	T120100-2B1	N/A	Supplied by test requester.
B	Notebook	Lenovo	ThinkBook 14 G4 IAP	MP28KHAH	Furnished by test lab.
C	SD Card	SanDisk	ZN6MA	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N	N	1.5m	DC Cable	Supplied by test requester.
2	N	N	1m	RJ45 Cable	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

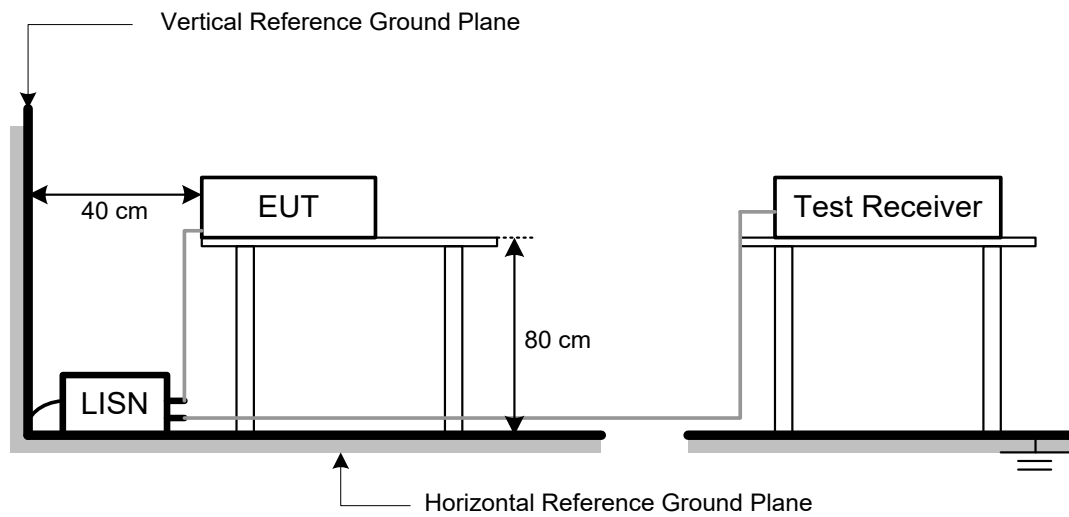

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB/m)		Measurement Value (dBμV/m)
36.23	+	-11.97	=	24.26

Measurement Value (dBμV/m)		Limit Value (dBμV/m)		Margin Level (dB)
24.26	-	40	=	-15.74

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

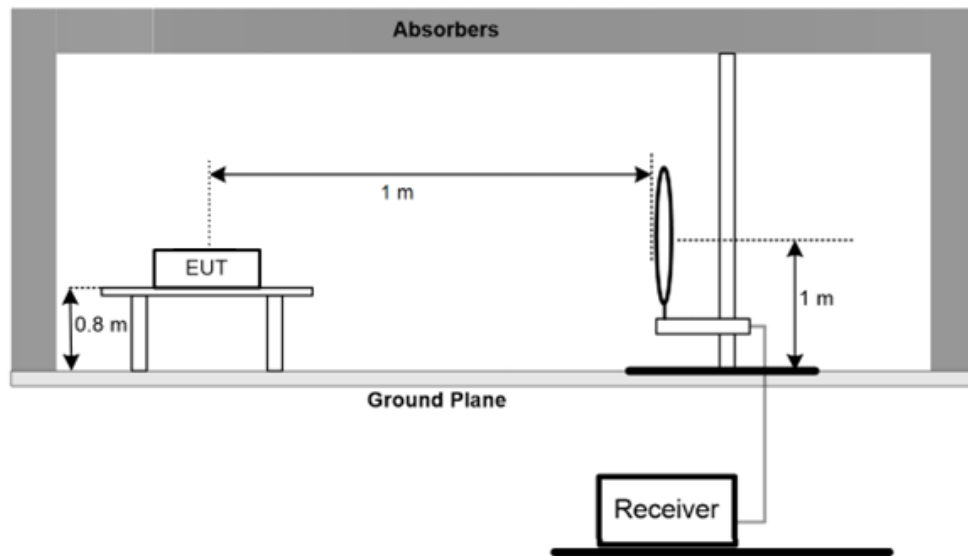

30 MHz to 1 GHz

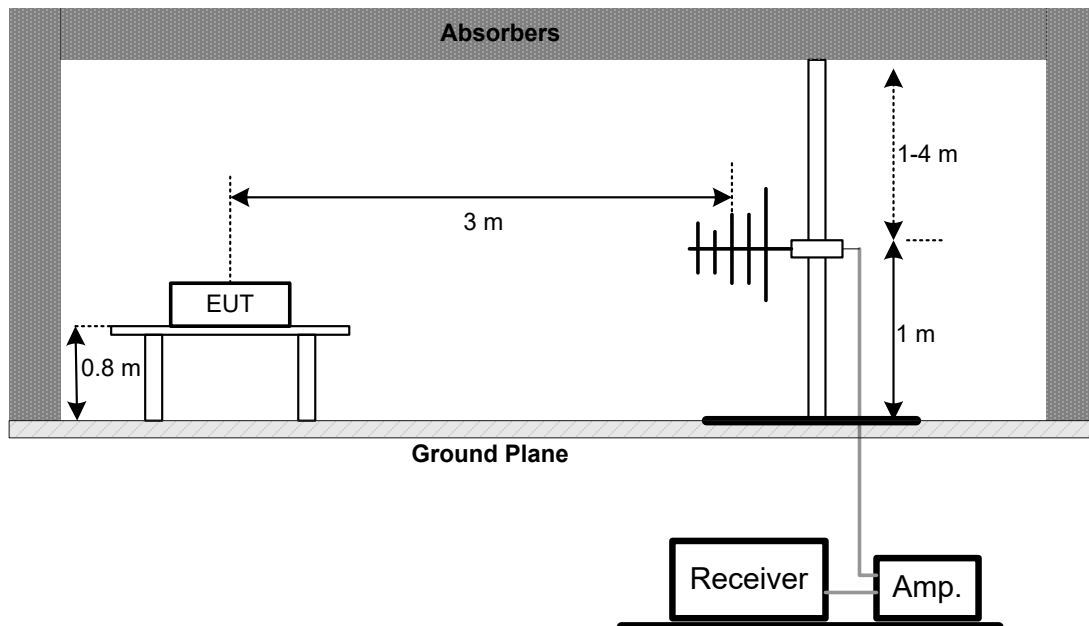

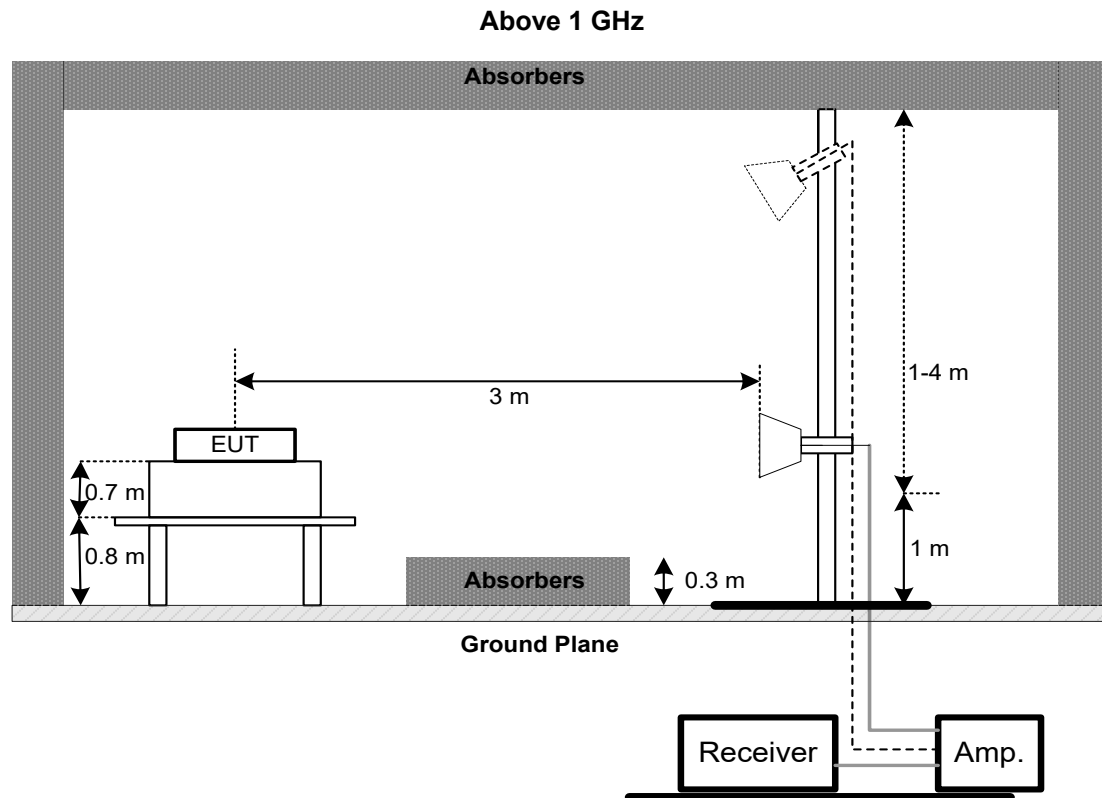

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

5.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	> RBW

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

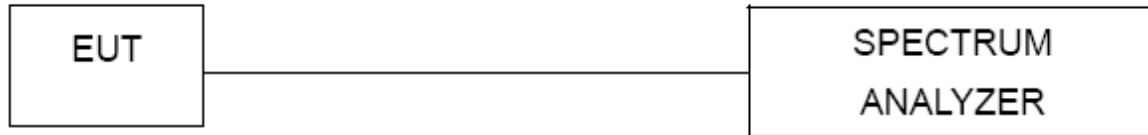

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the Peak Power Analyzer and antenna output port as show in the block diagram below.
- b. The maximum average conducted output power was performed in accordance with method of clause E. 3.
 - a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - a)Method PM (Measurement using an RF Peak Power Analyzer):
 - (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
 - (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

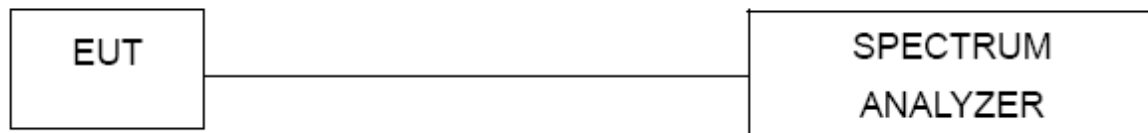

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX F.

8 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2024/6/26	2025/6/25
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2024/12/10	2025/12/9
3	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
4	Measurement Software	Farad	EZ EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions – For test date: 2024/12/14-2024/12/30						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2024/12/4	2025/12/3
2	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
3	Pre-Amplifier	EMCI	EMC001330-2020 1222	980807	2024/12/9	2025/12/8
4	Test Cable	EMCI	EMC-8D-NM-NM-5000	150106	2024/12/9	2025/12/8
5	Test Cable	EMCI	EMC-CFD-400-N M-NM-8000	200348	2024/12/9	2025/12/8
6	Test Cable	EMCI	EMC-CFD-400-N M-NM-3300	200343	2024/12/9	2025/12/8
7	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2025/1/14	2026/1/13
8	Pre-Amplifier	EMCI	EMC118A45SE	981030	2024/12/10	2025/12/9
9	Test Cable	EMCI	EMC105-SM-SM-1000	210119	2024/12/10	2025/12/9
10	Test Cable	EMCI	EMC105-SM-SM-3000	210118	2024/12/10	2025/12/9
11	Test Cable	EMCI	EMC105-SM-SM-7000	210117	2024/12/10	2025/12/9
12	EXA Spectrum Analyzer	keysight	N9020B	MY59050137	2024/11/24	2025/11/25
13	Pre-Amplifier	EMCI	EMC184045SE	980512	2024/12/10	2025/12/9
14	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2024/6/27	2025/6/26
15	Test Cable	EMCI	EMC102-KM-KM-1000	220328	2024/12/10	2025/12/9
16	Test Cable	EMCI	EMC101G-KM-KM-3000	220330	2024/12/10	2025/12/9
17	Measurement Software	Farad	EZ EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2024/6/27	2025/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	BTL-ConducredTest	BTL	1247788684	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	USB Peak Power Sensor	Anritsu	MA24408A	12589	2024/10/25	2025/10/24
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	Measurement Software	Anritsu	MA2440A Peak Power analyzer(Ver1.1.0.0)	N/A	N/A	N/A

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2024/6/27	2025/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	BTL-ConducredTest	BTL	1247788684	N/A	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

9 EUT TEST PHOTO

Please refer to document Appendix No.: TP-2502G022A-1 (APPENDIX-TEST PHOTOS).


10 EUT PHOTOS

Please refer to document Appendix No.: EP-2502G022A-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2025/5/5
Test Frequency	-	Phase	Line

80 dBuV

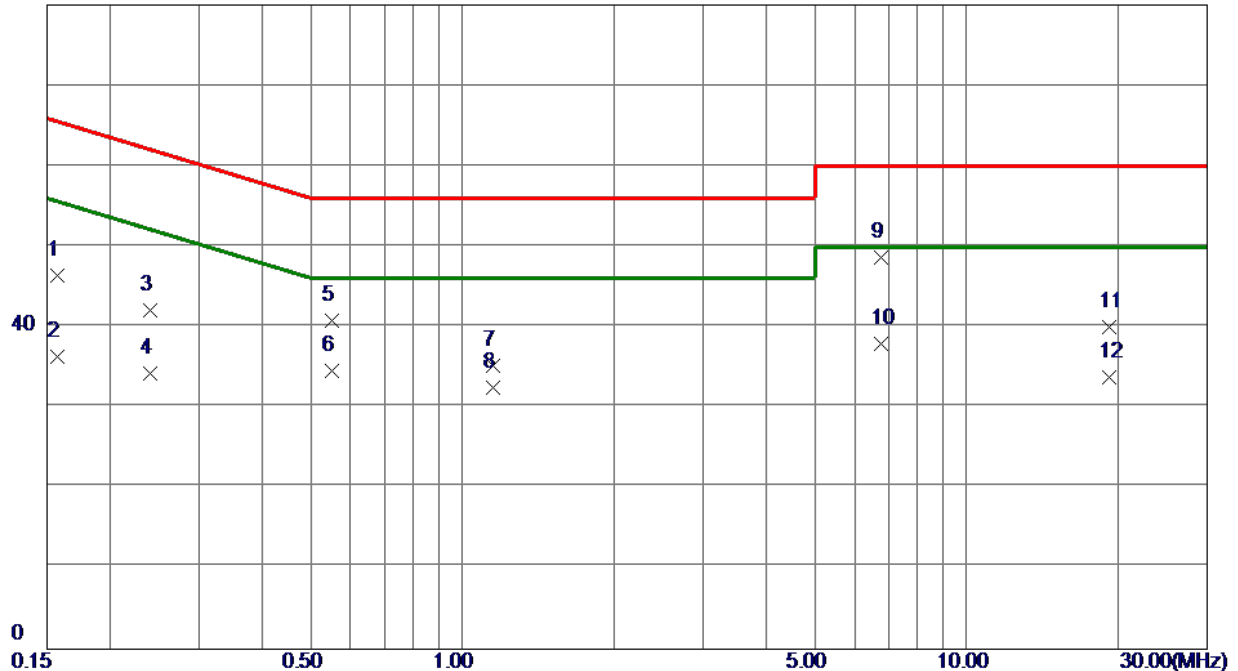


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1573	36.77	9.64	46.41	65.61	-19.20	QP	
2	0.1573	26.65	9.64	36.29	55.61	-19.32	AVG	
3	0.2406	32.47	9.62	42.09	62.08	-19.99	QP	
4	0.2406	24.58	9.62	34.20	52.08	-17.88	AVG	
5	0.5495	31.21	9.61	40.82	56.00	-15.18	QP	
6	0.5495	25.01	9.61	34.62	46.00	-11.38	AVG	
7	1.1525	25.56	9.64	35.20	56.00	-20.80	QP	
8	1.1525	22.79	9.64	32.43	46.00	-13.57	AVG	
9 *	6.7500	38.82	9.88	48.70	60.00	-11.30	QP	
10	6.7500	28.05	9.88	37.93	50.00	-12.07	AVG	
11	19.2000	29.74	10.31	40.05	60.00	-19.95	QP	
12	19.2000	23.39	10.31	33.70	50.00	-16.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2025/5/5
Test Frequency	-	Phase	Neutral

80 dBuV

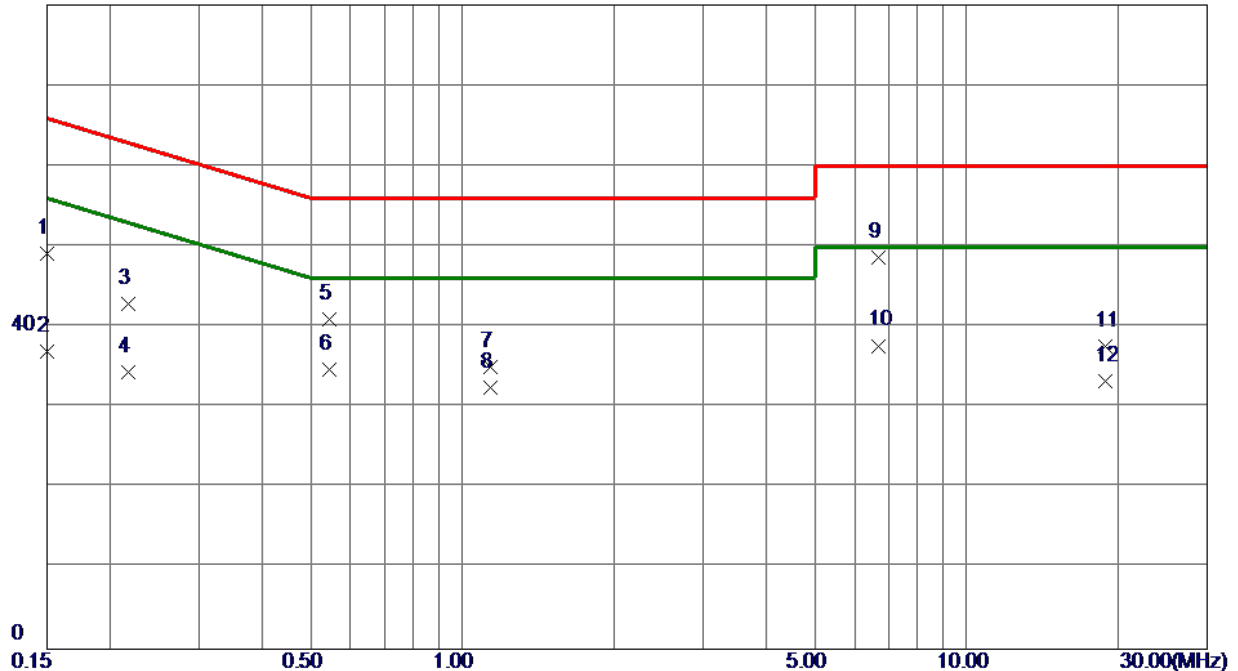


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	39.58	9.61	49.19	66.00	-16.81	QP	
2	0.1500	27.34	9.61	36.95	56.00	-19.05	AVG	
3	0.2175	33.22	9.62	42.84	62.91	-20.07	QP	
4	0.2175	24.82	9.62	34.44	52.91	-18.47	AVG	
5	0.5450	31.37	9.61	40.98	56.00	-15.02	QP	
6 *	0.5450	25.08	9.61	34.69	46.00	-11.31	AVG	
7	1.1344	25.48	9.63	35.11	56.00	-20.89	QP	
8	1.1344	22.80	9.63	32.43	46.00	-13.57	AVG	
9	6.6750	38.70	9.88	48.58	60.00	-11.42	QP	
10	6.6750	27.80	9.88	37.68	50.00	-12.32	AVG	
11	18.8500	27.25	10.29	37.54	60.00	-22.46	QP	
12	18.8500	23.06	10.29	33.35	50.00	-16.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2025/5/5
Test Frequency	-	Phase	Line

80 dBuV

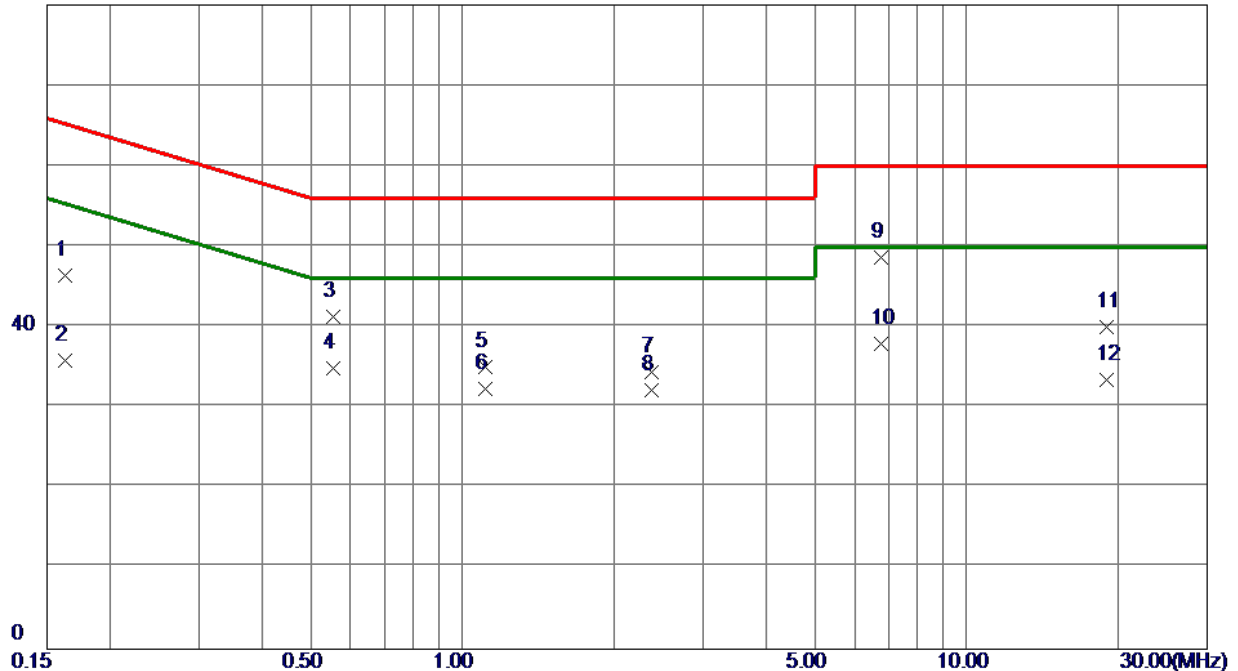


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1633	36.71	9.64	46.35	65.29	-18.94	QP	
2	0.1633	26.27	9.64	35.91	55.29	-19.38	AVG	
3	0.5540	31.65	9.61	41.26	56.00	-14.74	QP	
4 *	0.5540	25.33	9.61	34.94	46.00	-11.06	AVG	
5	1.1119	25.48	9.63	35.11	56.00	-20.89	QP	
6	1.1119	22.62	9.63	32.25	46.00	-13.75	AVG	
7	2.3720	24.63	9.73	34.36	56.00	-21.64	QP	
8	2.3720	22.45	9.73	32.18	46.00	-13.82	AVG	
9	6.7750	38.76	9.88	48.64	60.00	-11.36	QP	
10	6.7750	28.02	9.88	37.90	50.00	-12.10	AVG	
11	19.0000	29.72	10.31	40.03	60.00	-19.97	QP	
12	19.0000	23.16	10.31	33.47	50.00	-16.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2025/5/5
Test Frequency	-	Phase	Neutral

80 dBuV

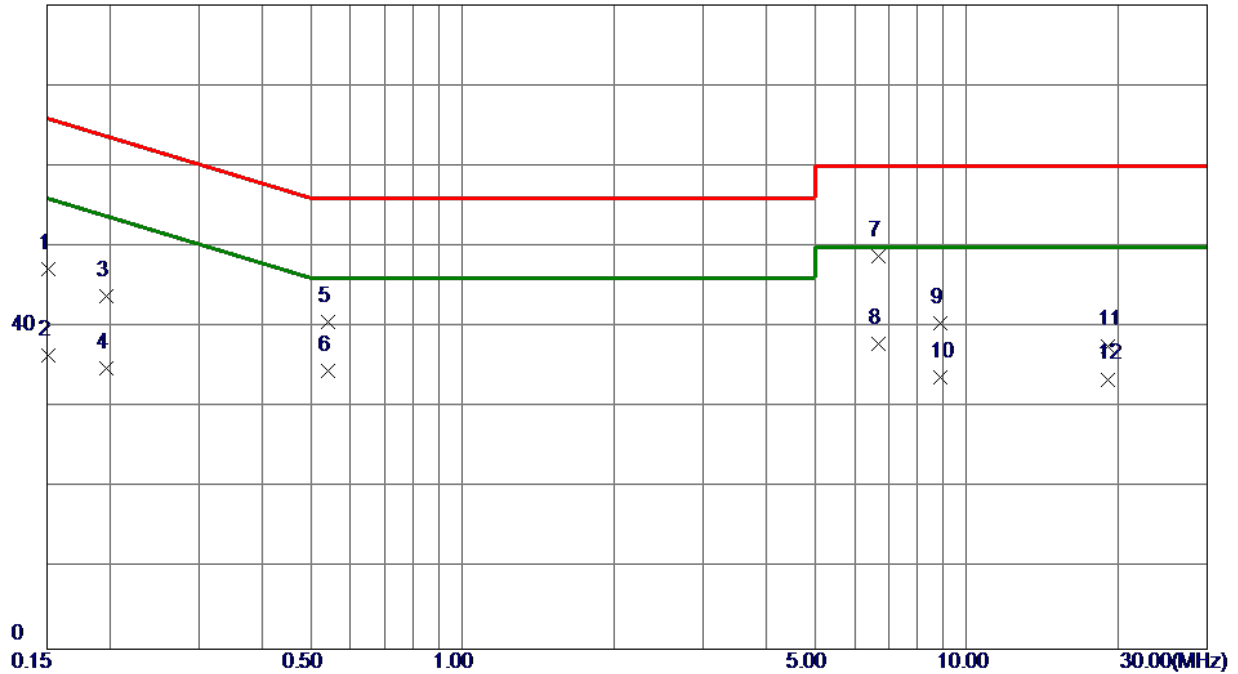


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1510	37.58	9.62	47.20	65.94	-18.74	QP	
2	0.1510	26.87	9.62	36.49	55.94	-19.45	AVG	
3	0.1965	34.20	9.62	43.82	63.76	-19.94	QP	
4	0.1965	25.29	9.62	34.91	53.76	-18.85	AVG	
5	0.5404	31.06	9.61	40.67	56.00	-15.33	QP	
6	0.5404	24.88	9.61	34.49	46.00	-11.51	AVG	
7 *	6.7000	38.96	9.88	48.84	60.00	-11.16	QP	
8	6.7000	28.07	9.88	37.95	50.00	-12.05	AVG	
9	8.8750	30.54	9.95	40.49	60.00	-19.51	QP	
10	8.8750	23.84	9.95	33.79	50.00	-16.21	AVG	
11	19.0500	27.38	10.30	37.68	60.00	-22.32	QP	
12	19.0500	23.22	10.30	33.52	50.00	-16.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/5
Test Frequency	5795MHz	Polarization	Vertical

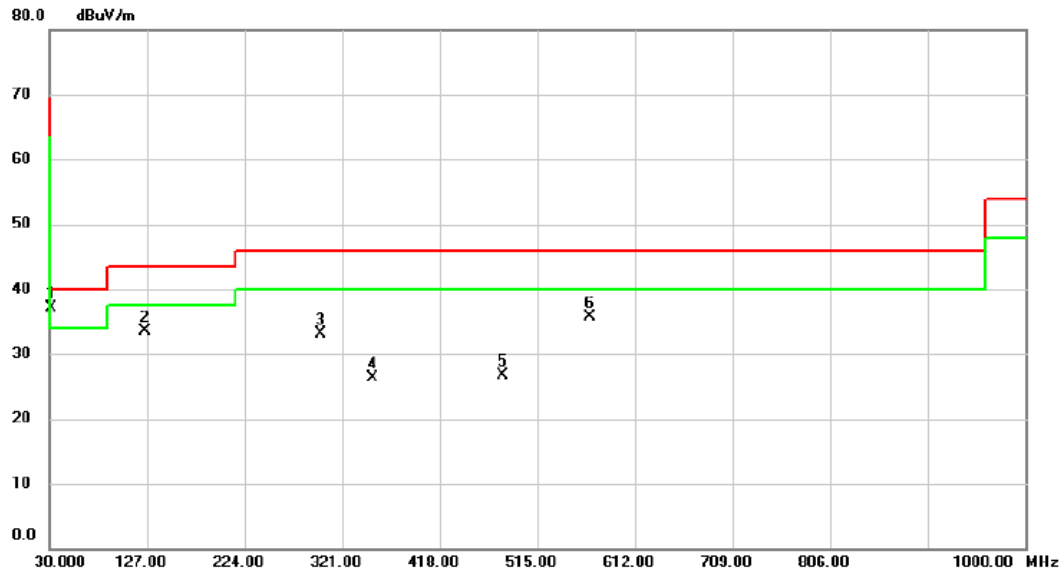


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	50.45	-13.38	37.07	40.00	-2.93	peak	
2		125.0600	46.92	-13.38	33.54	43.50	-9.96	peak	
3		299.6600	43.12	-10.00	33.12	46.00	-12.88	peak	
4		351.0700	34.89	-8.68	26.21	46.00	-19.79	peak	
5		480.0800	32.03	-5.27	26.76	46.00	-19.24	peak	
6		567.3800	39.02	-3.39	35.63	46.00	-10.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/5
Test Frequency	5795MHz	Polarization	Horizontal

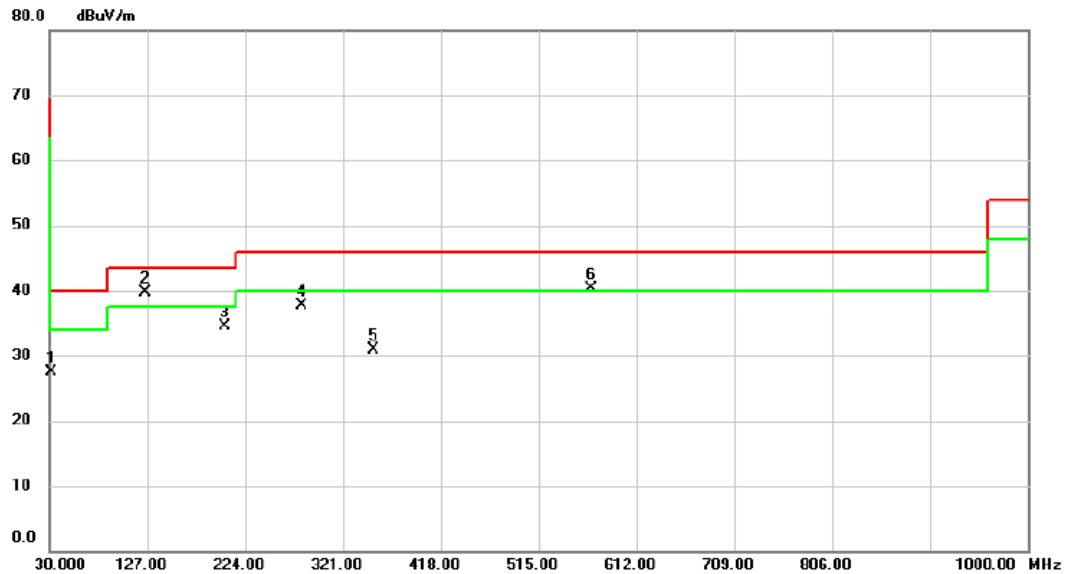


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	40.81	-13.38	27.43	40.00	-12.57	peak	
2	*	125.0600	53.15	-13.38	39.77	43.50	-3.73	peak	
3		203.6300	48.61	-14.11	34.50	43.50	-9.00	peak	
4		280.2600	48.26	-10.46	37.80	46.00	-8.20	peak	
5		351.0700	39.49	-8.68	30.81	46.00	-15.19	peak	
6		567.3800	43.75	-3.39	40.36	46.00	-5.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2025/5/28
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

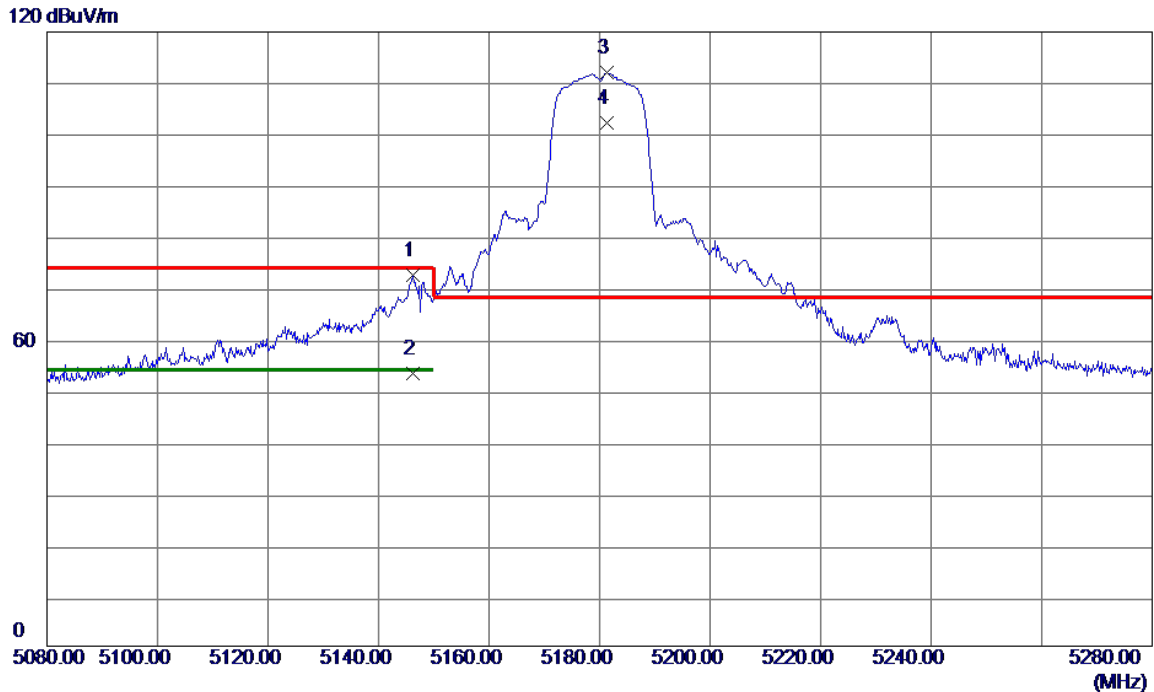


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.2000	63.92	8.62	72.54	74.00	-1.46	Peak	
2	5146.2000	44.75	8.62	53.37	54.00	-0.63	AVG	
3 *	5181.4000	103.39	8.65	112.04	68.20	43.84	Peak	No Limit
4	5181.4000	93.58	8.65	102.23	999.00	-896.77	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/28
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

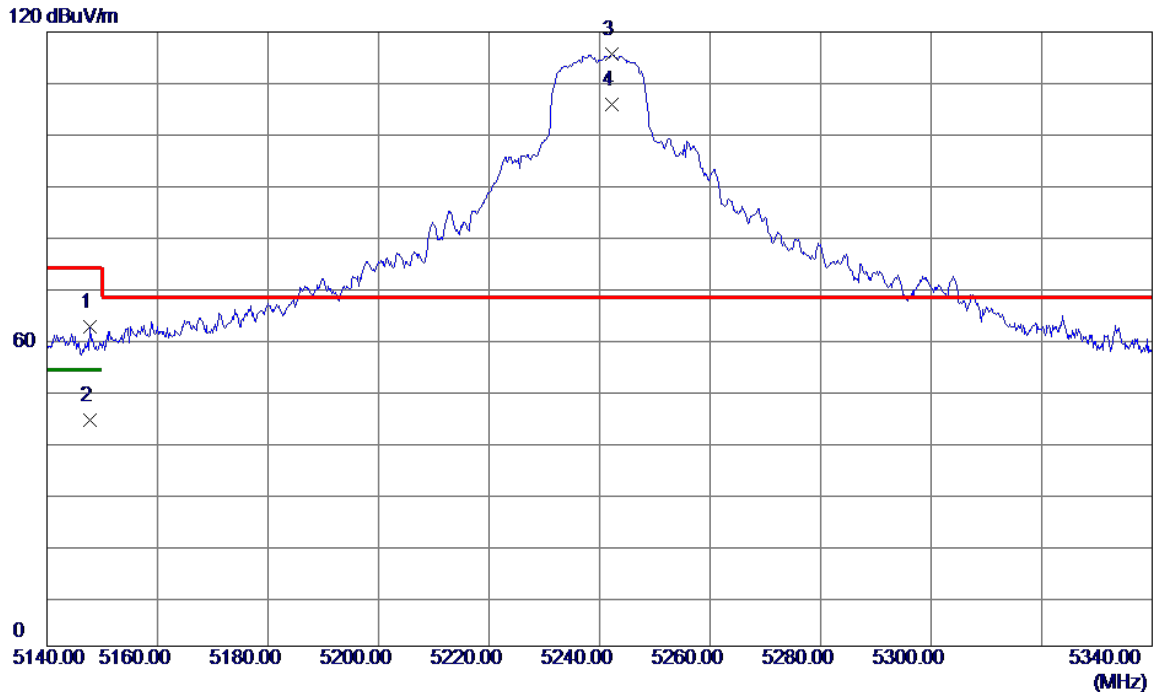


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.8000	53.86	8.62	62.48	74.00	-11.52	Peak	
2	5147.8000	35.60	8.62	44.22	54.00	-9.78	AVG	
3 *	5242.2000	107.04	8.68	115.72	68.20	47.52	Peak	No Limit
4	5242.2000	97.23	8.68	105.91	999.00	-893.09	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/28
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

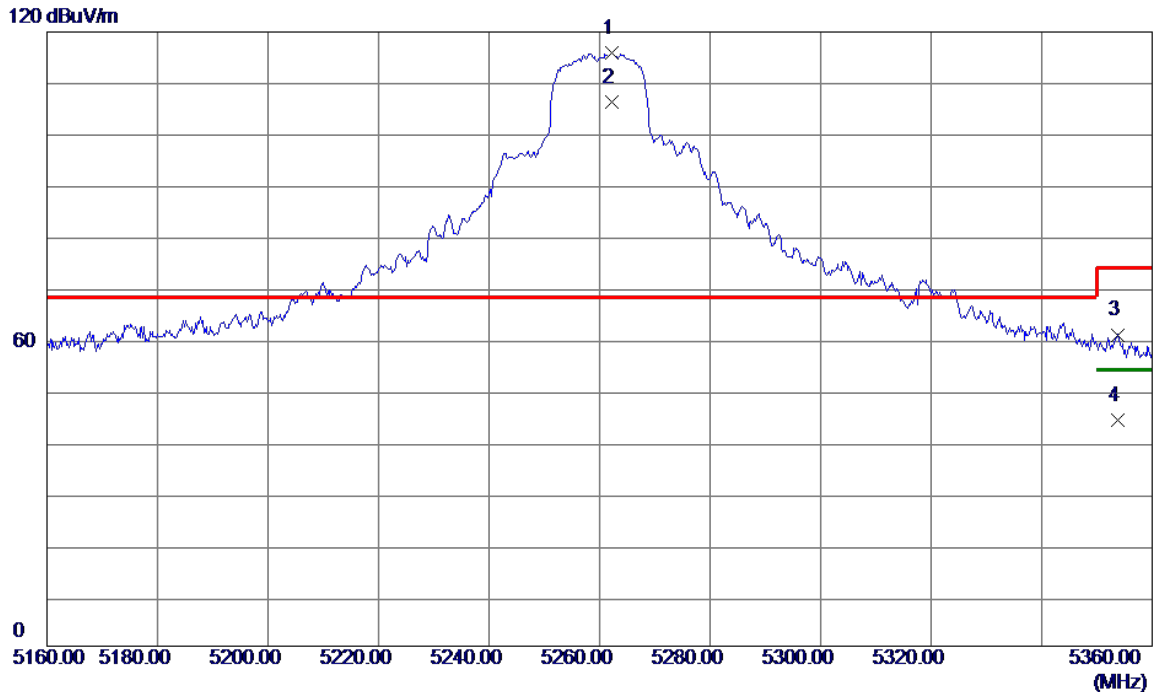


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5262.2000	107.26	8.70	115.96	68.20	47.76	Peak	No Limit
2	5262.2000	97.50	8.70	106.20	999.00	-892.80	AVG	No Limit
3	5353.8000	52.08	8.76	60.84	74.00	-13.16	Peak	
4	5353.8000	35.29	8.76	44.05	54.00	-9.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/28
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

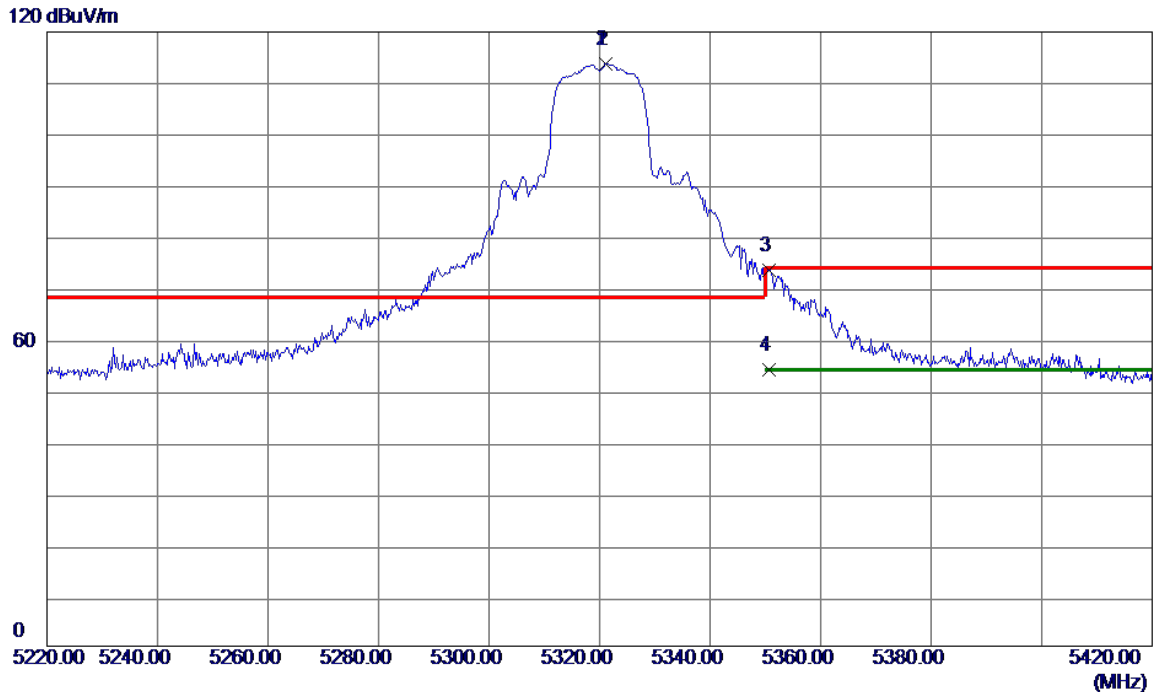


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5321.2000	105.03	8.74	113.77	68.20	45.57	Peak	No Limit
2	5321.2000	105.03	8.74	113.77	68.20	45.57	Peak	No Limit
3	5350.6000	64.73	8.75	73.48	74.00	-0.52	Peak	
4	5350.6000	45.21	8.75	53.96	54.00	-0.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/28
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

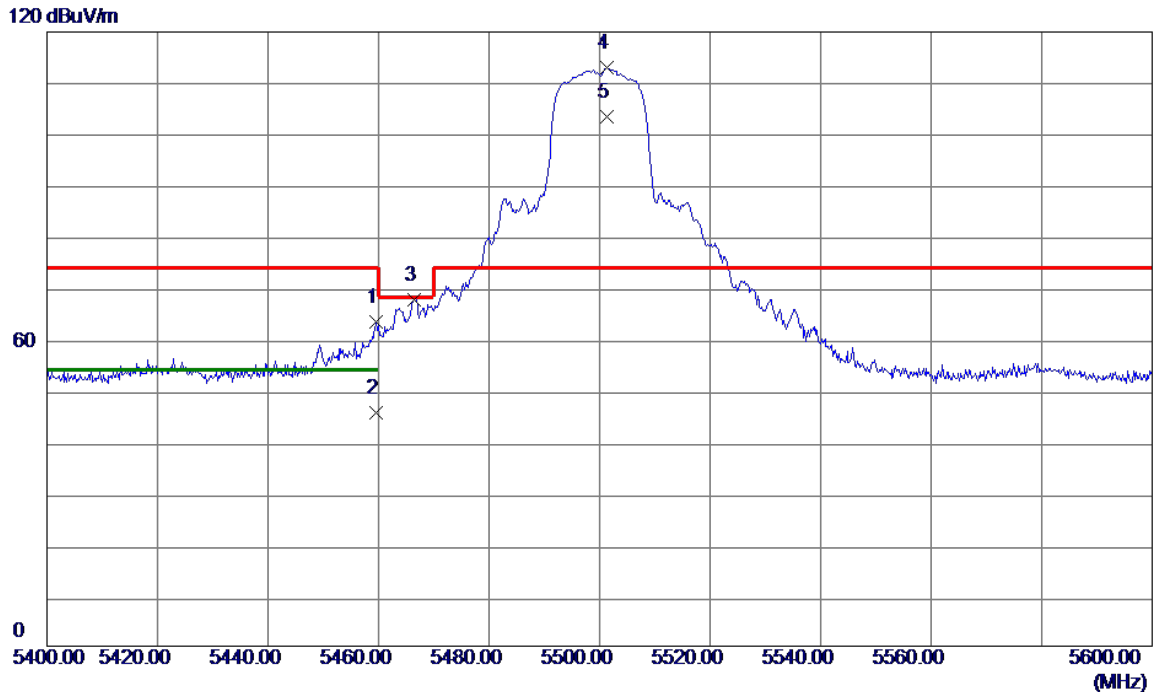


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.6000	54.65	8.82	63.47	74.00	-10.53	Peak	
2	5459.6000	36.76	8.82	45.58	54.00	-8.42	AVG	
3	5466.4000	58.96	8.83	67.79	68.20	-0.41	Peak	
4 *	5501.4000	104.09	8.85	112.94	74.00	38.94	Peak	No Limit
5	5501.4000	94.49	8.85	103.34	999.00	-895.66	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/28
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

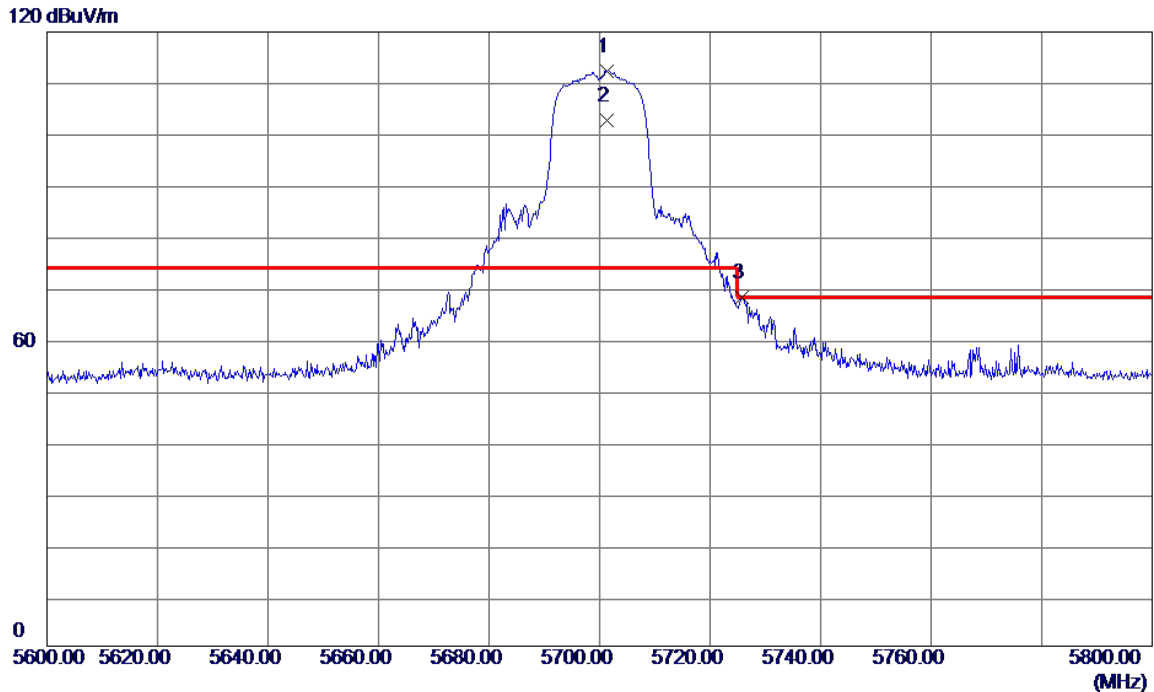


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.4000	102.85	9.52	112.37	74.00	38.37	Peak	No Limit
2	5701.4000	93.11	9.52	102.63	999.00	-896.37	AVG	No Limit
3	5725.8000	58.47	9.60	68.07	68.20	-0.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/28
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

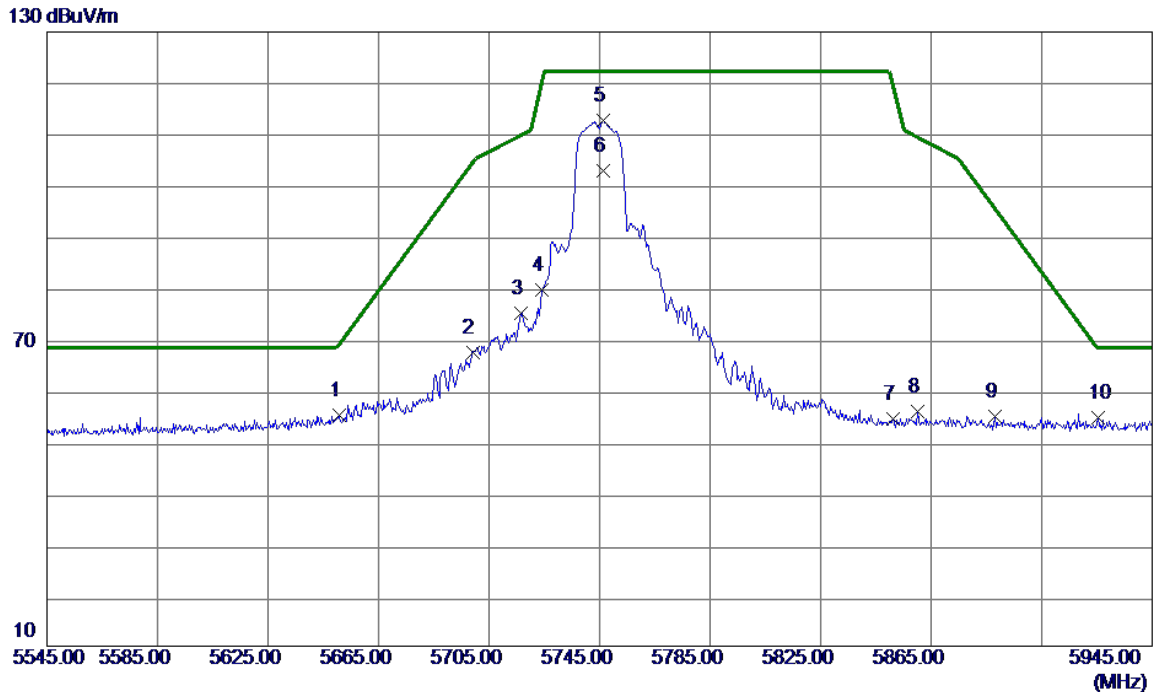


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5650.6000	45.66	9.35	55.01	68.65	-13.64	Peak	
2	5699.0000	57.85	9.51	67.36	104.46	-37.10	Peak	
3	5716.6000	65.56	9.57	75.13	109.85	-34.72	Peak	
4	5724.2000	69.97	9.59	79.56	120.38	-40.82	Peak	
5 *	5746.2000	102.95	9.67	112.62	122.20	-9.58	Peak	No Limit
6	5746.2000	93.12	9.67	102.79	122.20	-19.41	AVG	No Limit
7	5851.4000	44.47	10.02	54.49	119.01	-64.52	Peak	
8	5860.2000	45.70	10.05	55.75	109.34	-53.59	Peak	
9	5888.2000	44.73	10.14	54.87	95.40	-40.53	Peak	
10	5925.4000	44.38	10.26	54.64	68.20	-13.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/28
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

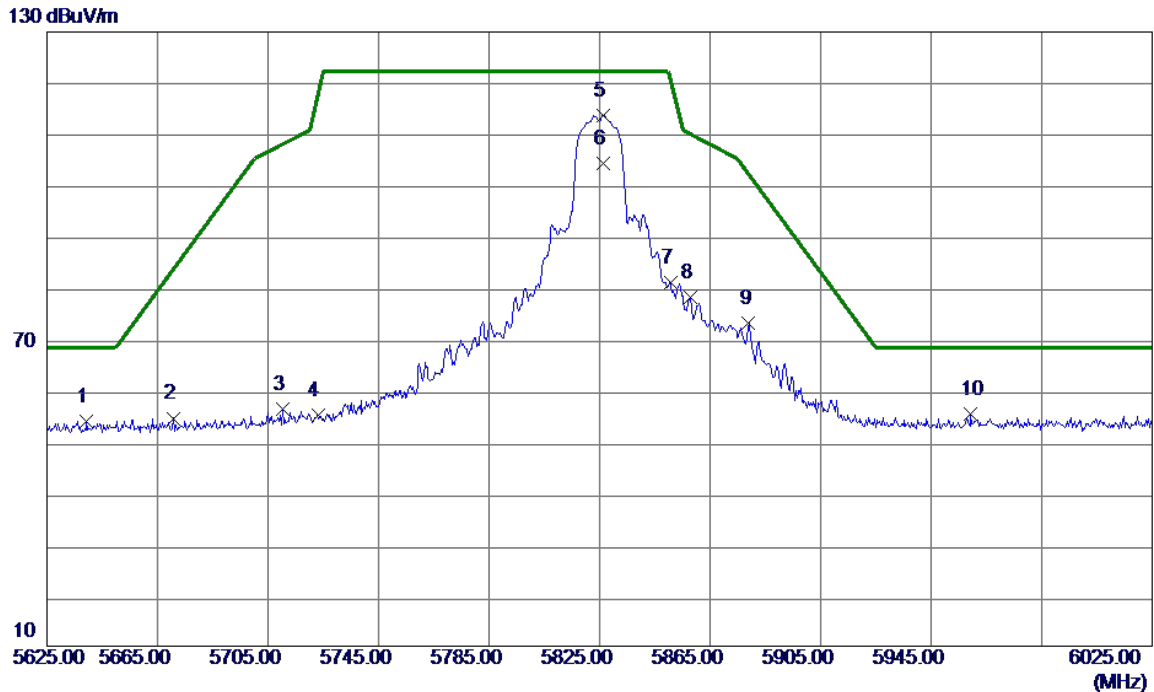


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5639.4000	44.66	9.31	53.97	68.20	-14.23	Peak	
2	5670.6000	45.10	9.42	54.52	83.48	-28.96	Peak	
3	5710.2000	46.69	9.55	56.24	108.06	-51.82	Peak	
4	5723.0000	45.57	9.59	55.16	117.64	-62.48	Peak	
5 *	5826.2000	103.83	9.93	113.76	122.20	-8.44	Peak	No Limit
6	5826.2000	94.34	9.93	104.27	122.20	-17.93	AVG	No Limit
7	5850.6000	71.06	10.01	81.07	120.83	-39.76	Peak	
8	5857.8000	68.04	10.04	78.08	110.01	-31.93	Peak	
9	5879.0000	62.91	10.11	73.02	102.23	-29.21	Peak	
10	5959.4000	45.01	10.38	55.39	68.20	-12.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/28
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

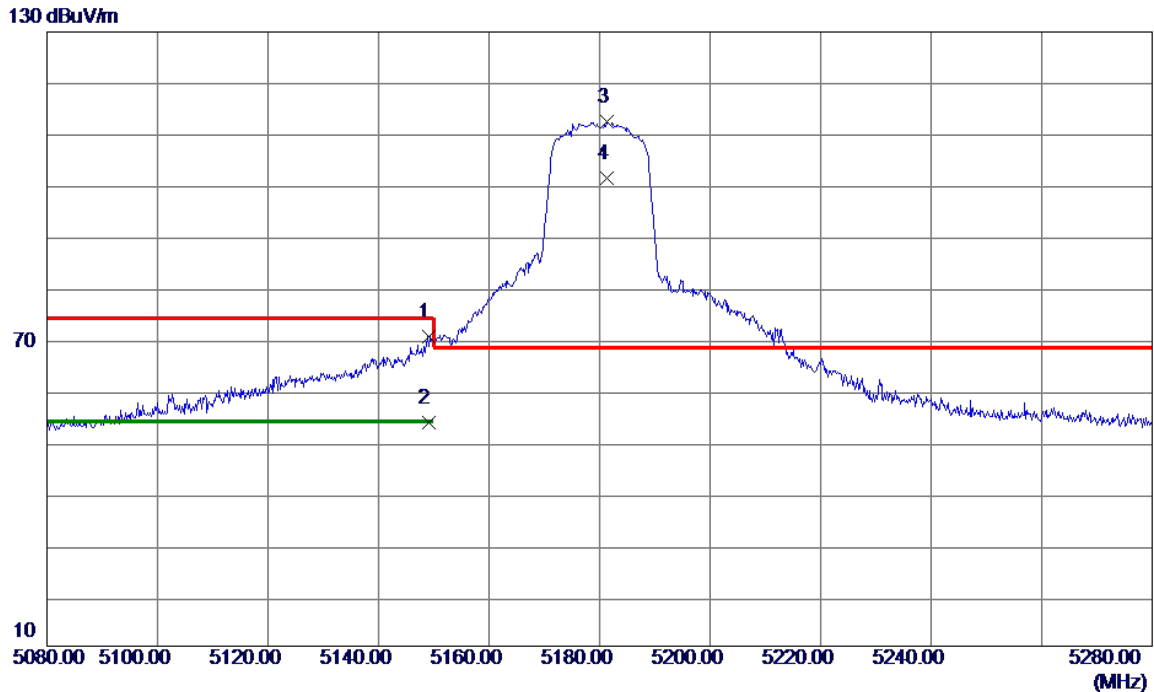


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.0000	61.88	8.63	70.51	74.00	-3.49	Peak	
2	5149.0000	45.14	8.63	53.77	54.00	-0.23	AVG	
3 *	5181.4000	103.81	8.65	112.46	68.20	44.26	Peak	No Limit
4	5181.4000	92.69	8.65	101.34	999.00	-897.66	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

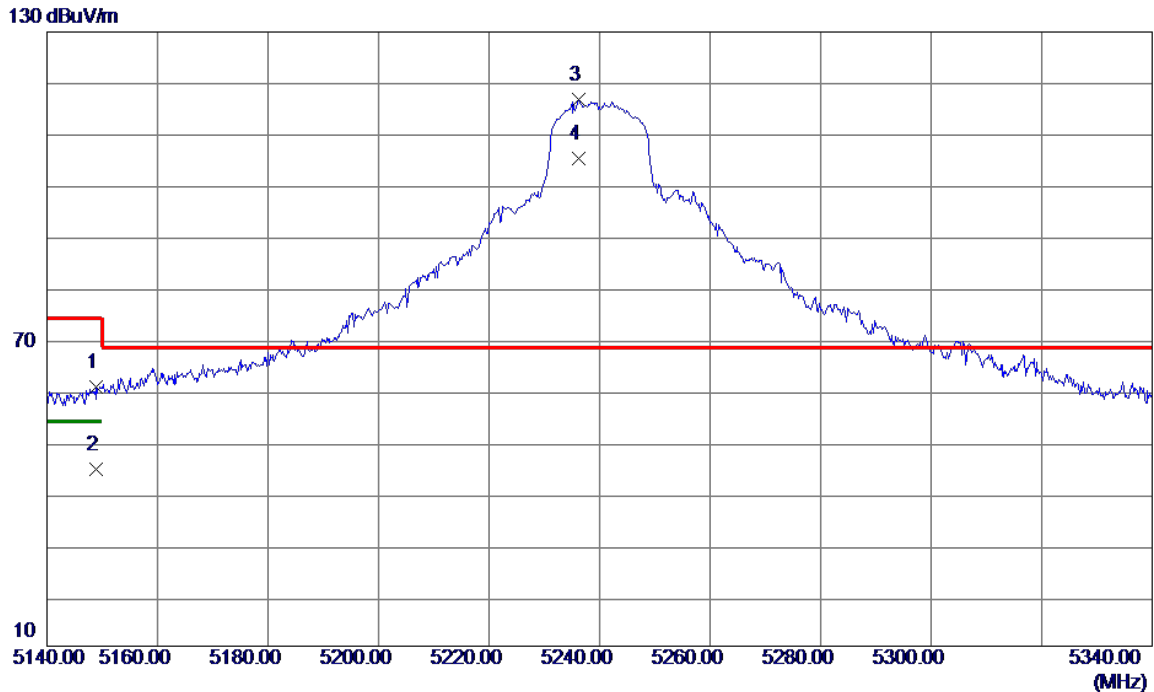


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.8000	52.00	8.63	60.63	74.00	-13.37	Peak	
2	5148.8000	35.90	8.63	44.53	54.00	-9.47	AVG	
3 *	5236.2000	108.08	8.68	116.76	68.20	48.56	Peak	No Limit
4	5236.2000	96.59	8.68	105.27	999.00	-893.73	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

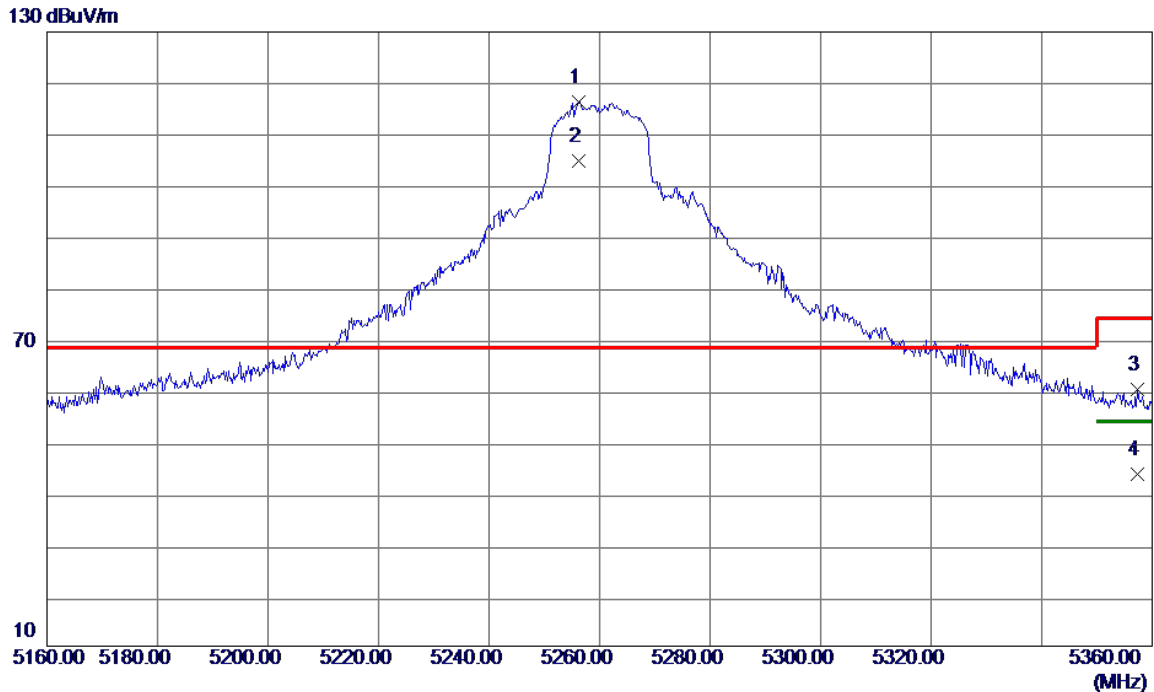


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5256.2000	107.67	8.69	116.36	68.20	48.16	Peak	No Limit
2	5256.2000	96.03	8.69	104.72	999.00	-894.28	AVG	No Limit
3	5357.4000	51.32	8.76	60.08	74.00	-13.92	Peak	
4	5357.4000	34.89	8.76	43.65	54.00	-10.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

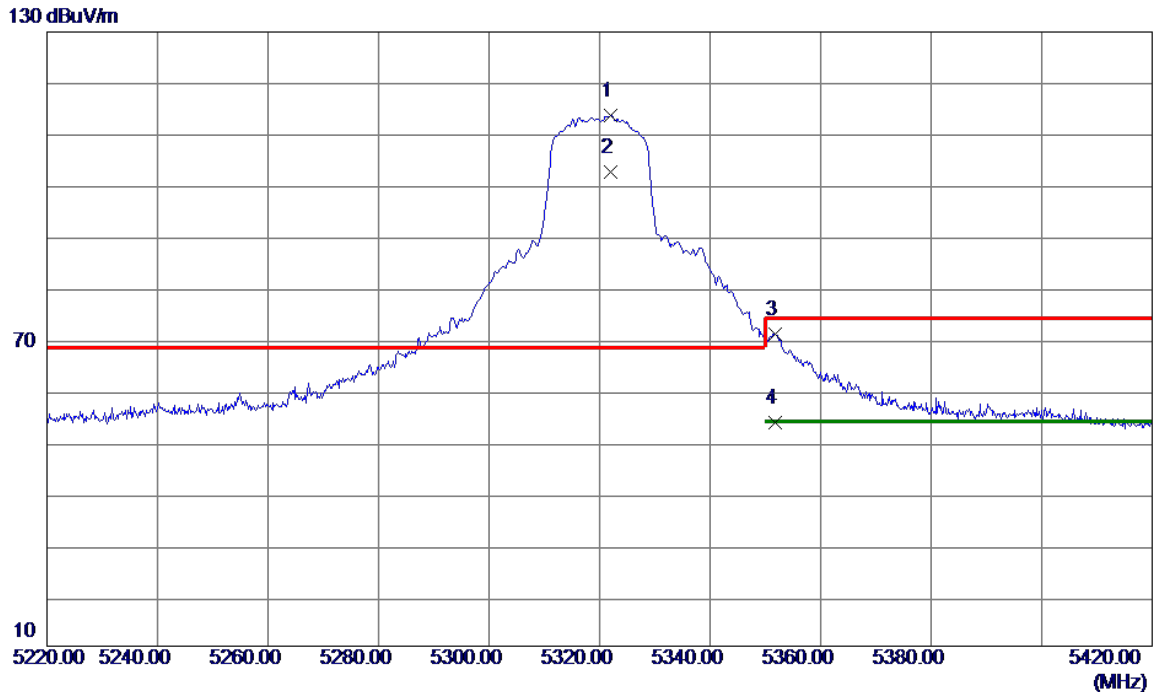


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5322.0000	104.99	8.74	113.73	68.20	45.53	Peak	No Limit
2	5322.0000	93.89	8.74	102.63	999.00	-896.37	AVG	No Limit
3	5351.8000	62.26	8.76	71.02	74.00	-2.98	Peak	
4	5351.8000	44.97	8.76	53.73	54.00	-0.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

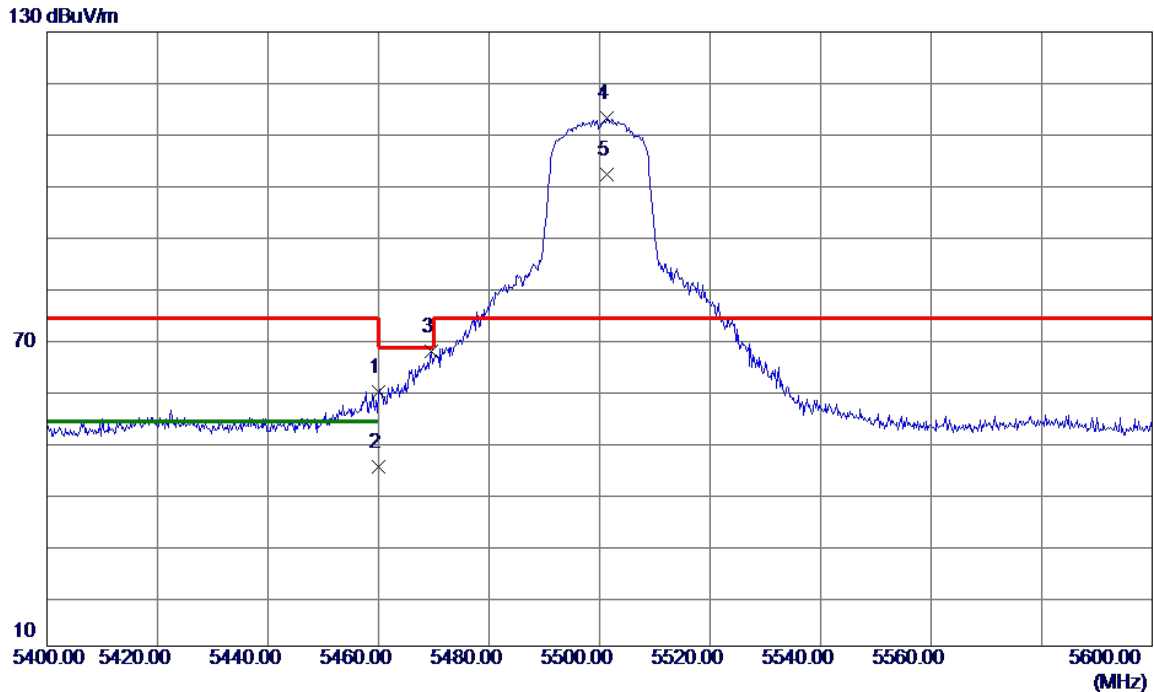


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	50.83	8.82	59.65	74.00	-14.35	Peak	
2	5460.0000	36.17	8.82	44.99	54.00	-9.01	AVG	
3	5469.6000	58.81	8.83	67.64	68.20	-0.56	Peak	
4 *	5501.4000	104.36	8.85	113.21	74.00	39.21	Peak	No Limit
5	5501.4000	93.36	8.85	102.21	999.00	-896.79	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

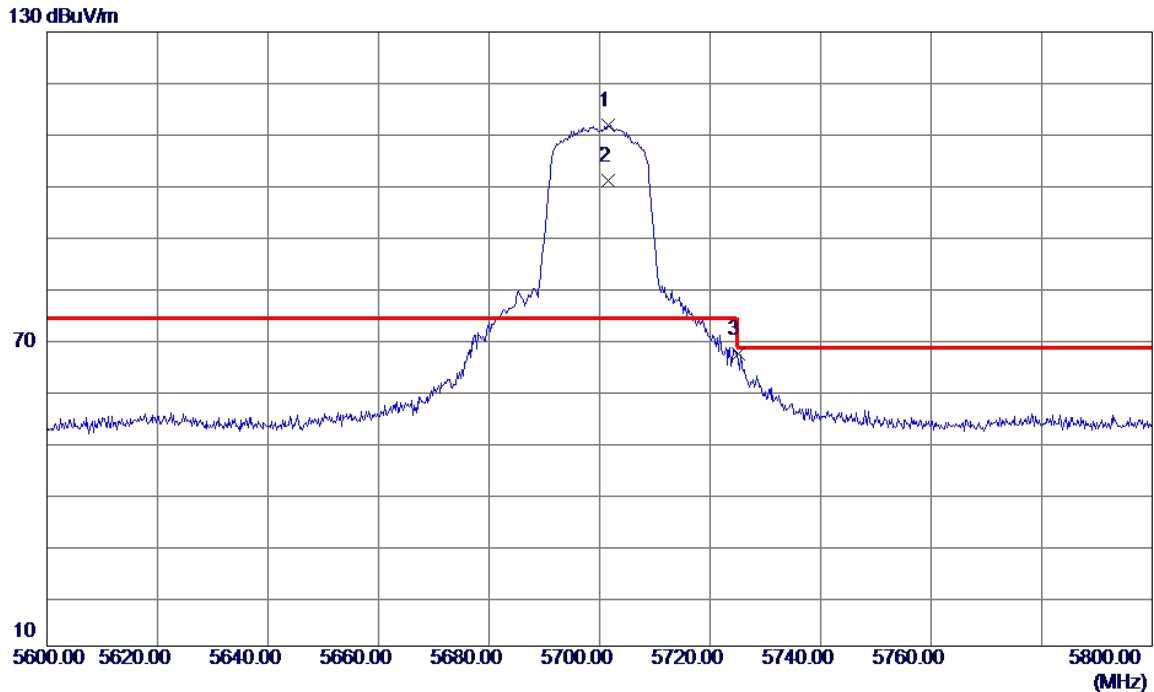


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.6000	102.16	9.52	111.68	74.00	37.68	Peak	No Limit
2	5701.6000	91.41	9.52	100.93	999.00	-898.07	AVG	No Limit
3	5725.0000	57.55	9.60	67.15	74.00	-6.85	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

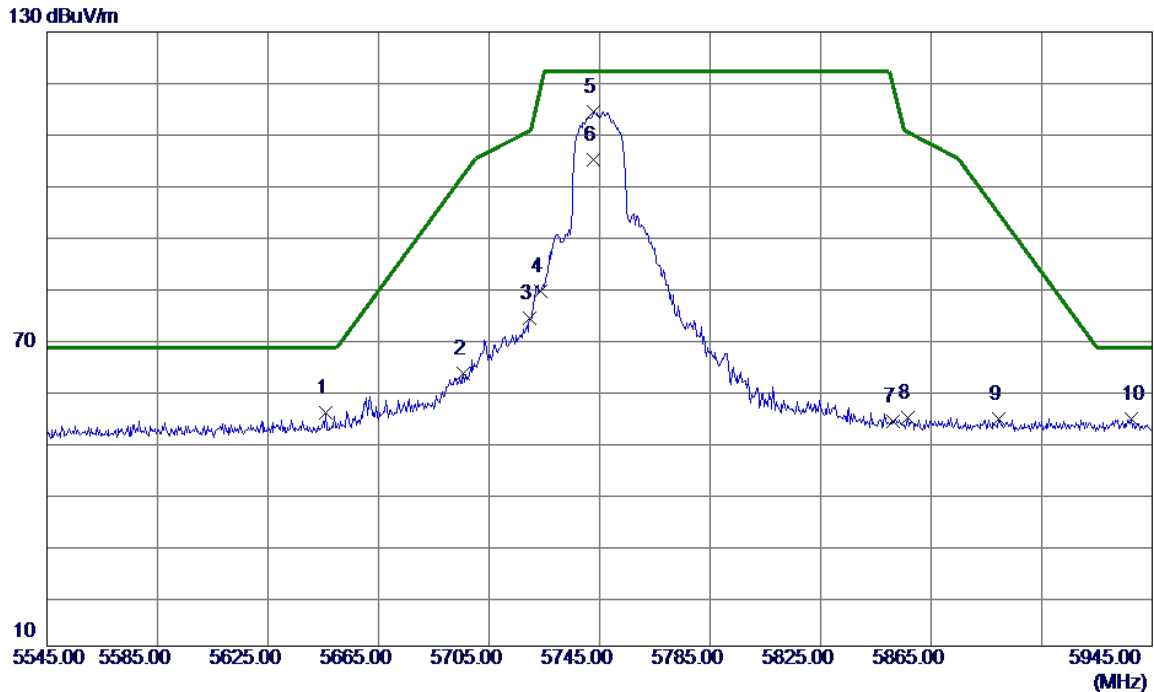


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5645.8000	46.17	9.33	55.50	68.20	-12.70	Peak	
2	5695.8000	53.82	9.50	63.32	102.10	-38.78	Peak	
3	5719.8000	64.48	9.58	74.06	110.74	-36.68	Peak	
4	5723.6669	69.78	9.59	79.37	119.16	-39.79	Peak	
5 *	5742.6000	104.70	9.66	114.36	122.20	-7.84	Peak	No Limit
6	5742.6000	95.47	9.66	105.13	122.20	-17.07	AVG	No Limit
7	5851.1330	43.88	10.02	53.90	119.62	-65.72	Peak	
8	5856.6000	44.72	10.03	54.75	110.35	-55.60	Peak	
9	5889.4000	44.19	10.14	54.33	94.51	-40.18	Peak	
10	5937.4000	44.19	10.30	54.49	68.20	-13.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

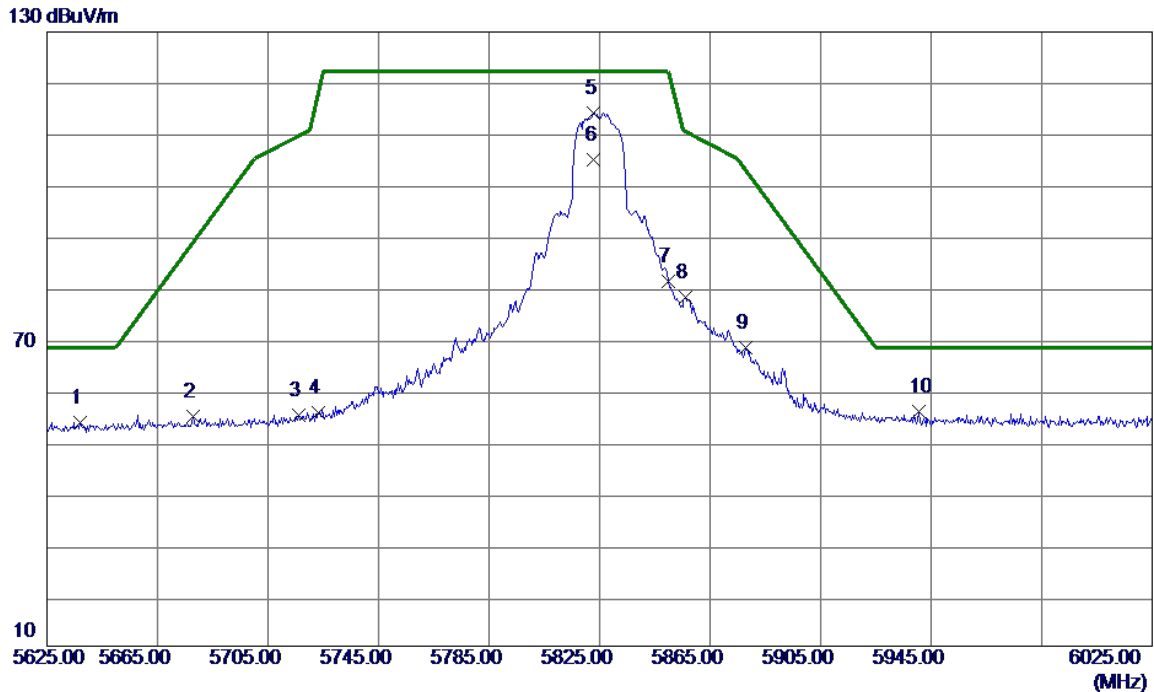


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5637.0000	44.35	9.30	53.65	68.20	-14.55	Peak	
2	5677.8000	45.37	9.44	54.81	88.81	-34.00	Peak	
3	5716.2000	45.62	9.57	55.19	109.74	-54.55	Peak	
4	5723.4000	45.90	9.59	55.49	118.55	-63.06	Peak	
5 *	5823.0000	104.27	9.92	114.19	122.20	-8.01	Peak	No Limit
6	5823.0000	95.00	9.92	104.92	122.20	-17.28	AVG	No Limit
7	5849.8000	71.37	10.01	81.38	122.20	-40.82	Peak	
8	5856.2000	68.01	10.03	78.04	110.46	-32.42	Peak	
9	5877.8000	58.23	10.10	68.33	103.12	-34.79	Peak	
10	5940.6000	45.44	10.31	55.75	68.20	-12.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

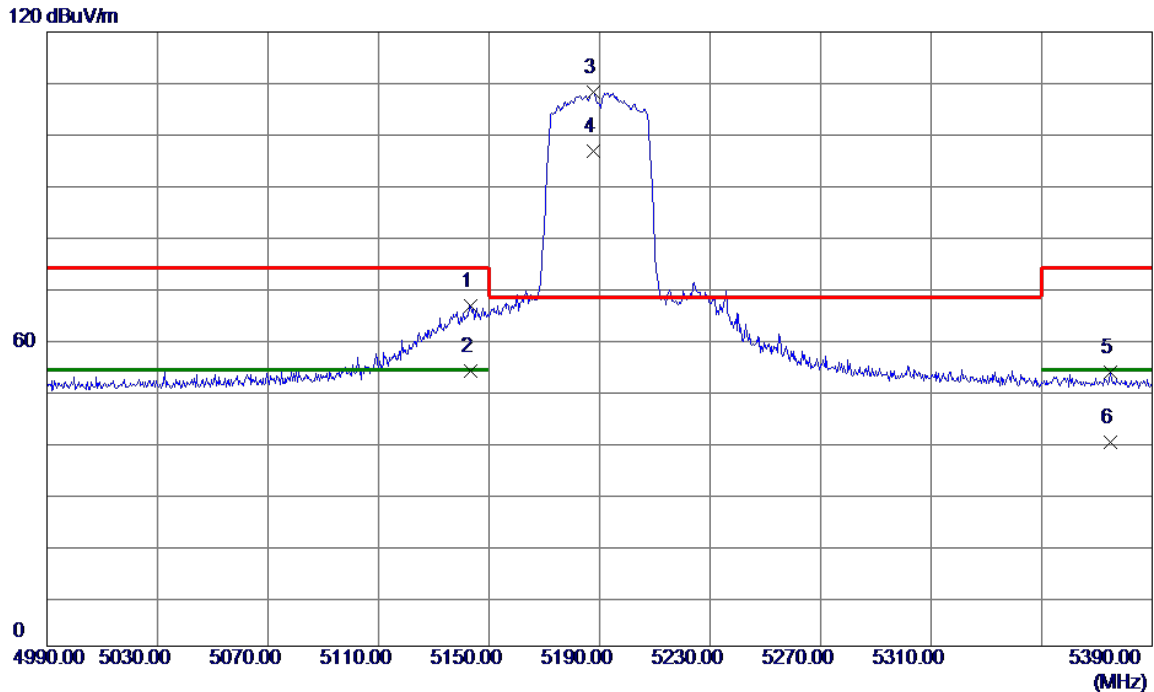


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5143.2000	57.94	8.62	66.56	74.00	-7.44	Peak	
2	5143.2000	45.09	8.62	53.71	54.00	-0.29	AVG	
3 *	5187.6000	99.50	8.65	108.15	68.20	39.95	Peak	No Limit
4	5187.6000	88.03	8.65	96.68	999.00	-902.32	AVG	No Limit
5	5374.8000	44.79	8.77	53.56	74.00	-20.44	Peak	
6	5374.8000	31.13	8.77	39.90	54.00	-14.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

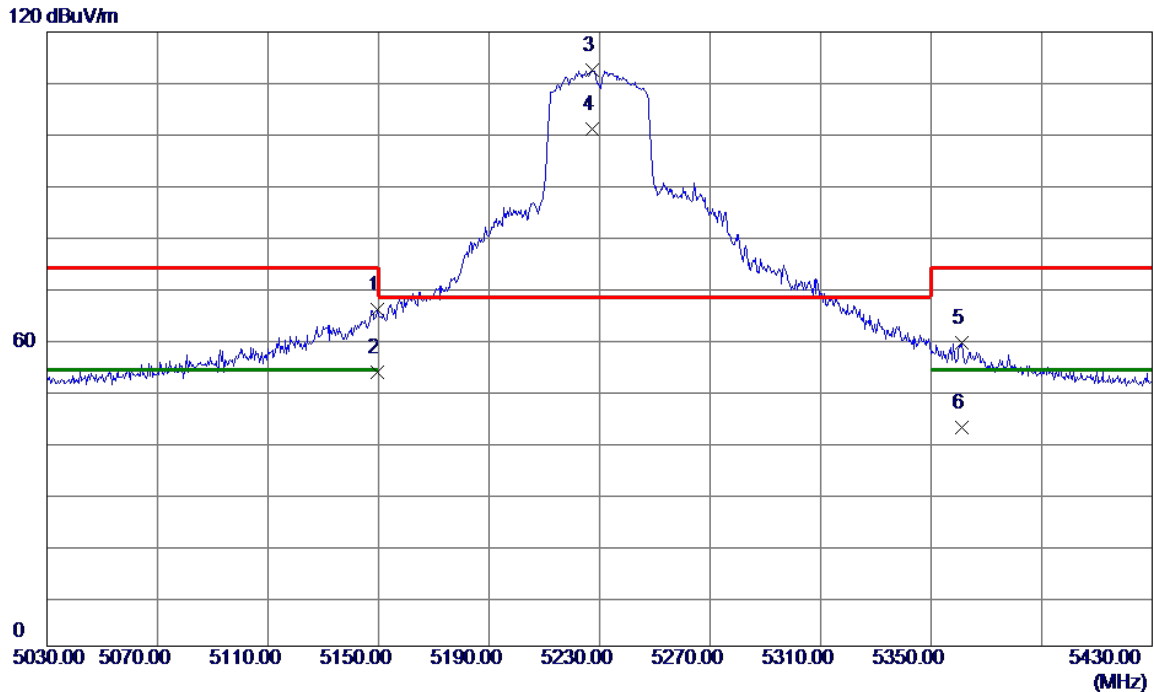


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.6000	57.02	8.63	65.65	74.00	-8.35	Peak	
2	5149.6000	44.96	8.63	53.59	54.00	-0.41	AVG	
3 *	5227.2000	103.77	8.68	112.45	68.20	44.25	Peak	No Limit
4	5227.2000	92.24	8.68	100.92	999.00	-898.08	AVG	No Limit
5	5361.2000	50.43	8.76	59.19	74.00	-14.81	Peak	
6	5361.2000	34.04	8.76	42.80	54.00	-11.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

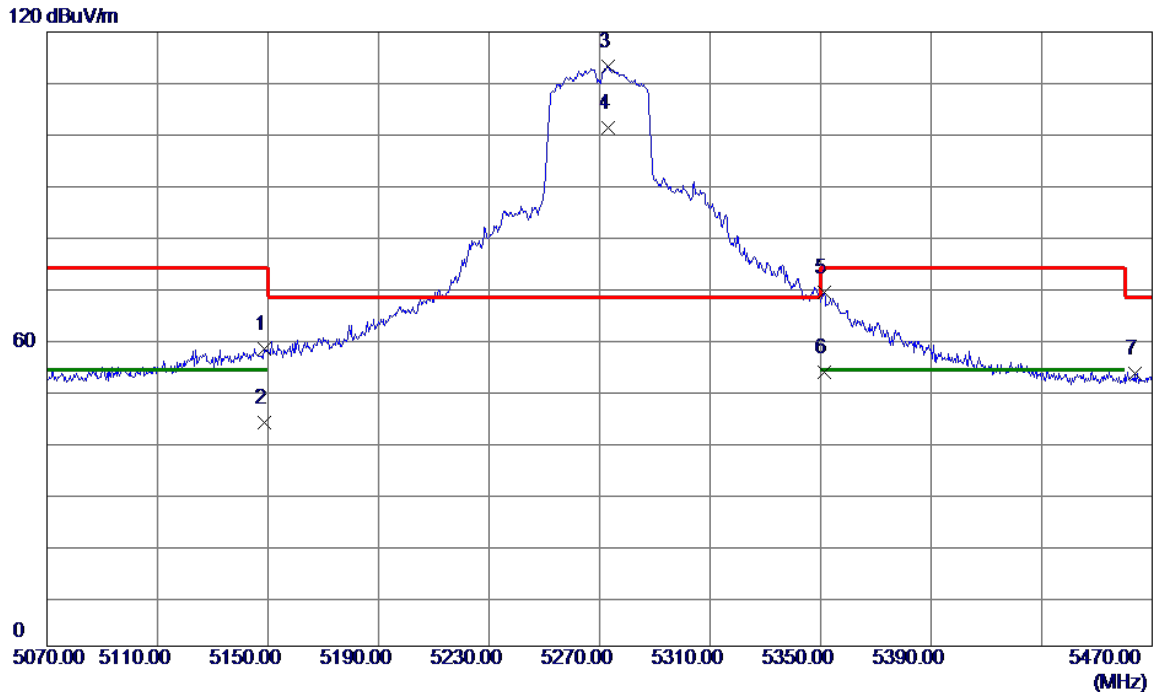


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.8000	49.37	8.63	58.00	74.00	-16.00	Peak	
2	5148.8000	35.06	8.63	43.69	54.00	-10.31	AVG	
3 *	5273.2000	104.47	8.70	113.17	68.20	44.97	Peak	No Limit
4	5273.2000	92.53	8.70	101.23	999.00	-897.77	AVG	No Limit
5	5351.2000	60.36	8.75	69.11	74.00	-4.89	Peak	
6	5351.2000	44.82	8.75	53.57	54.00	-0.43	AVG	
7	5463.6000	44.42	8.83	53.25	68.20	-14.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

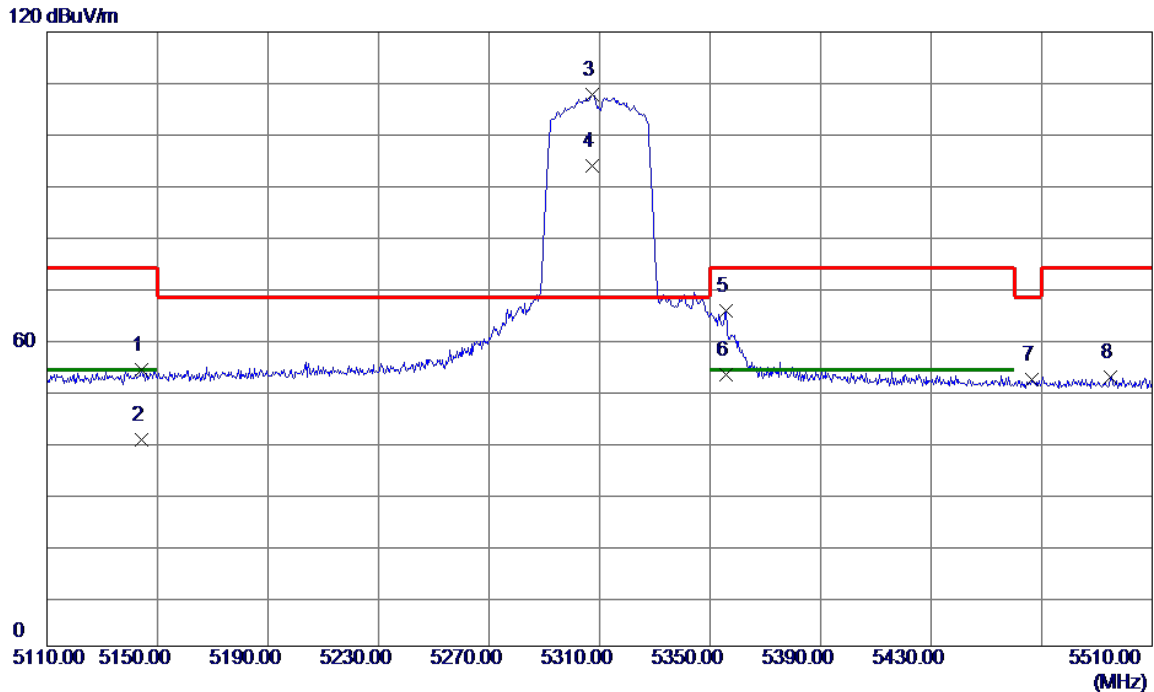


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.4000	45.30	8.62	53.92	74.00	-20.08	Peak	
2	5144.4000	31.78	8.62	40.40	54.00	-13.60	AVG	
3 *	5307.2000	99.00	8.73	107.73	68.20	39.53	Peak	No Limit
4	5307.2000	85.21	8.73	93.94	999.00	-905.06	AVG	No Limit
5	5355.6000	56.72	8.76	65.48	74.00	-8.52	Peak	
6	5355.6000	44.39	8.76	53.15	54.00	-0.85	AVG	
7	5466.4000	43.22	8.83	52.05	68.20	-16.15	Peak	
8	5494.8000	43.76	8.85	52.61	74.00	-21.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

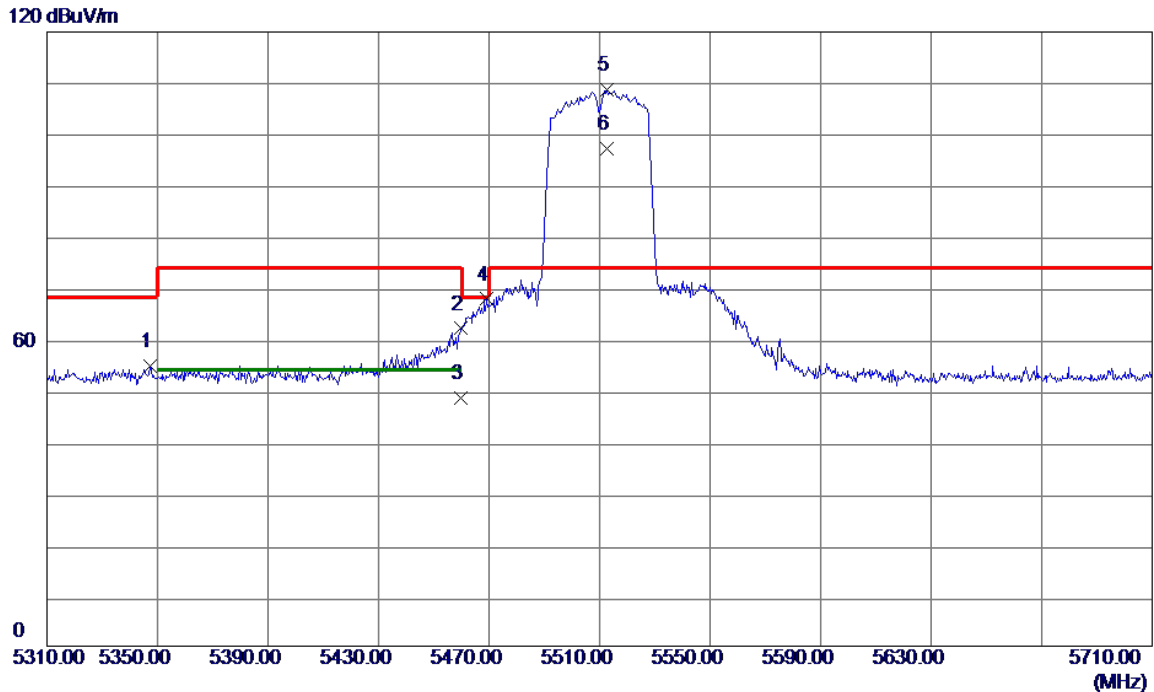


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5347.2000	46.05	8.75	54.80	68.20	-13.40	Peak	
2	5459.6000	53.22	8.82	62.04	74.00	-11.96	Peak	
3	5459.6000	39.75	8.82	48.57	54.00	-5.43	AVG	
4	5469.2000	58.97	8.83	67.80	68.20	-0.40	Peak	
5 *	5512.8000	99.73	8.89	108.62	74.00	34.62	Peak	No Limit
6	5512.8000	88.27	8.89	97.16	999.00	-901.84	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

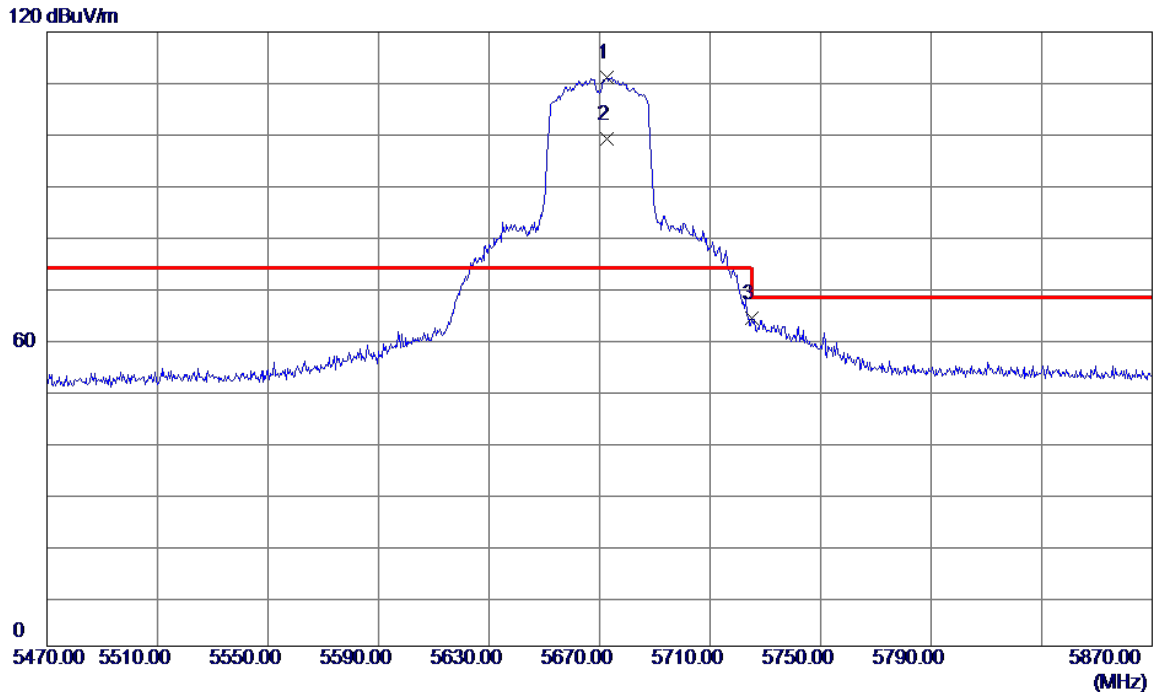


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5672.8000	101.63	9.42	111.05	74.00	37.05	Peak	No Limit
2	5672.8000	89.74	9.42	99.16	999.00	-899.84	AVG	No Limit
3	5725.2000	54.44	9.60	64.04	68.20	-4.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

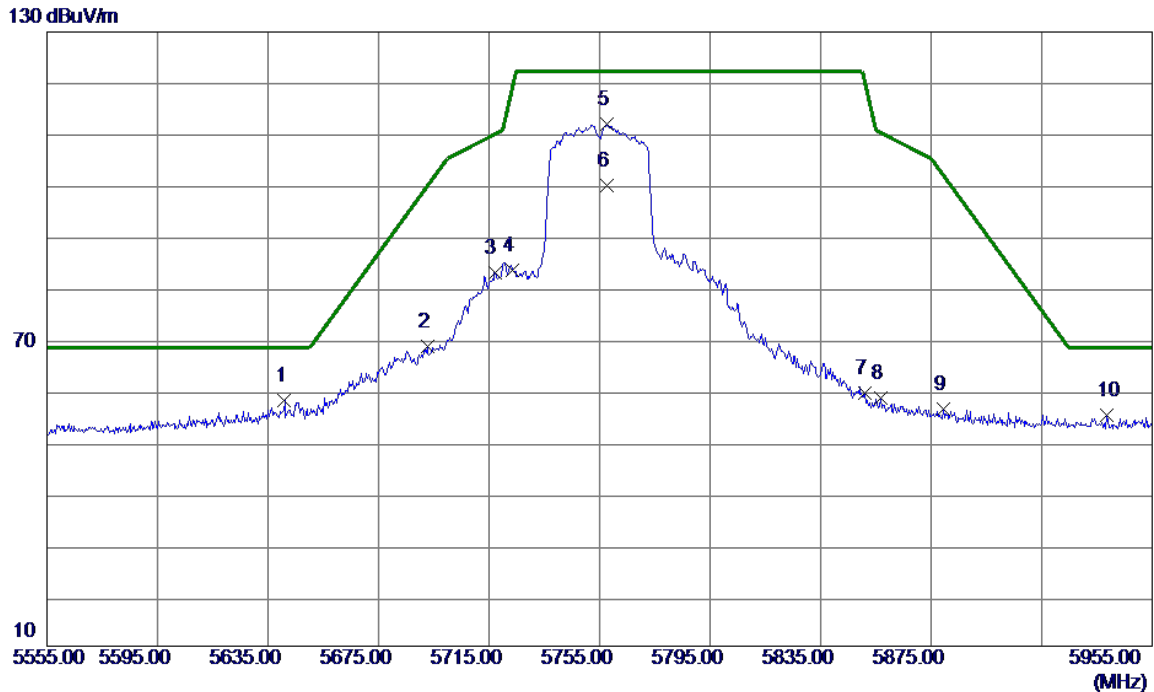


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5641.0000	48.57	9.32	57.89	68.20	-10.31	Peak	
2	5692.6000	59.13	9.49	68.62	99.74	-31.12	Peak	
3	5717.0000	73.32	9.57	82.89	109.96	-27.07	Peak	
4	5723.5330	73.94	9.59	83.53	118.86	-35.33	Peak	
5 *	5757.8000	102.20	9.71	111.91	122.20	-10.29	Peak	No Limit
6	5757.8000	90.33	9.71	100.04	122.20	-22.16	AVG	No Limit
7	5851.0000	49.52	10.02	59.54	119.92	-60.38	Peak	
8	5856.6000	48.49	10.03	58.52	110.35	-51.83	Peak	
9	5879.4000	46.20	10.11	56.31	101.93	-45.62	Peak	
10	5938.6000	44.73	10.31	55.04	68.20	-13.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

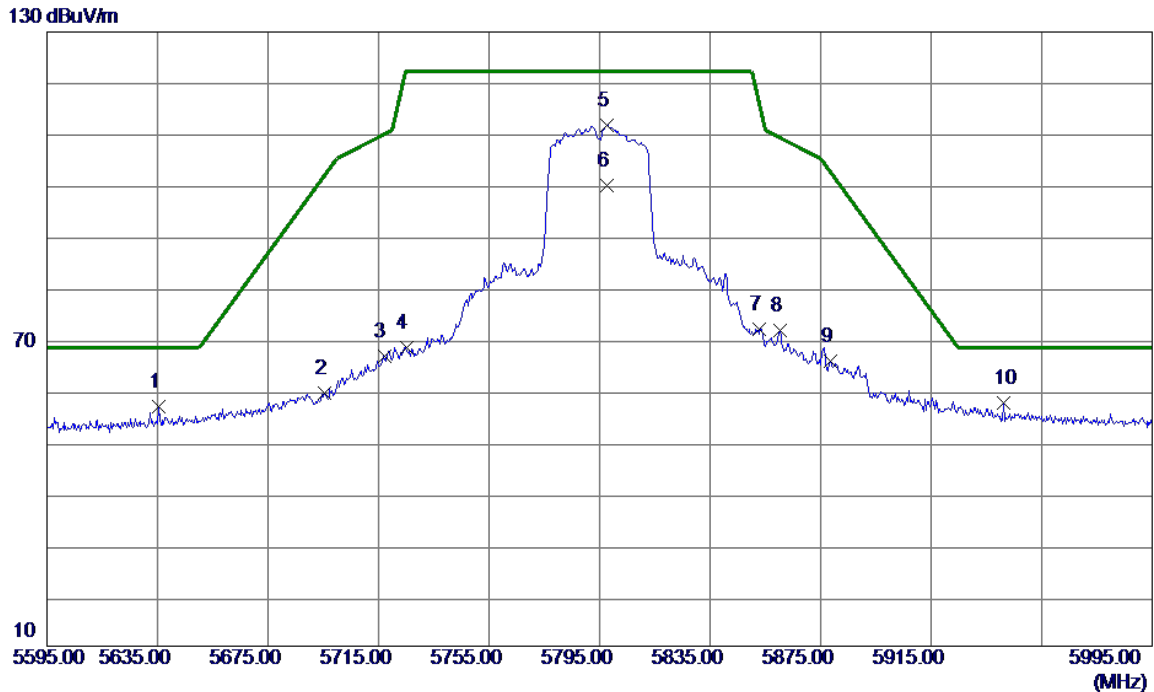


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5635.4000	47.50	9.30	56.80	68.20	-11.40	Peak	
2	5695.4000	49.90	9.50	59.40	101.81	-42.41	Peak	
3	5717.0000	56.99	9.57	66.56	109.96	-43.40	Peak	
4	5725.0000	58.66	9.60	68.26	122.20	-53.94	Peak	
5 *	5797.8000	101.99	9.84	111.83	122.20	-10.37	Peak	No Limit
6	5797.8000	90.14	9.84	99.98	122.20	-22.22	AVG	No Limit
7	5852.6000	61.89	10.02	71.91	116.27	-44.36	Peak	
8	5860.2000	61.64	10.05	71.69	109.34	-37.65	Peak	
9	5878.6000	55.64	10.11	65.75	102.53	-36.78	Peak	
10	5941.4000	47.09	10.32	57.41	68.20	-10.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/5/29
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

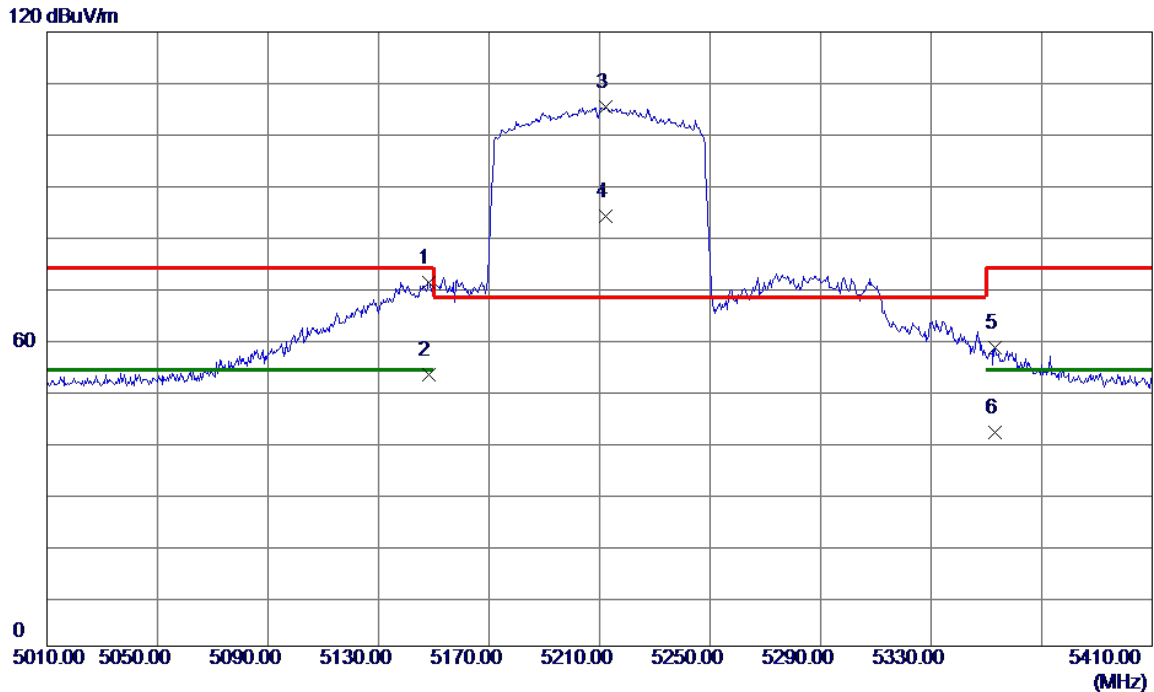


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.0000	62.51	8.62	71.13	74.00	-2.87	Peak	
2	5148.0000	44.48	8.62	53.10	54.00	-0.90	AVG	
3 *	5212.4000	96.58	8.67	105.25	68.20	37.05	Peak	No Limit
4	5212.4000	75.33	8.67	84.00	999.00	-915.00	AVG	No Limit
5	5353.2000	49.48	8.76	58.24	74.00	-15.76	Peak	
6	5353.2000	32.94	8.76	41.70	54.00	-12.30	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/5/29
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

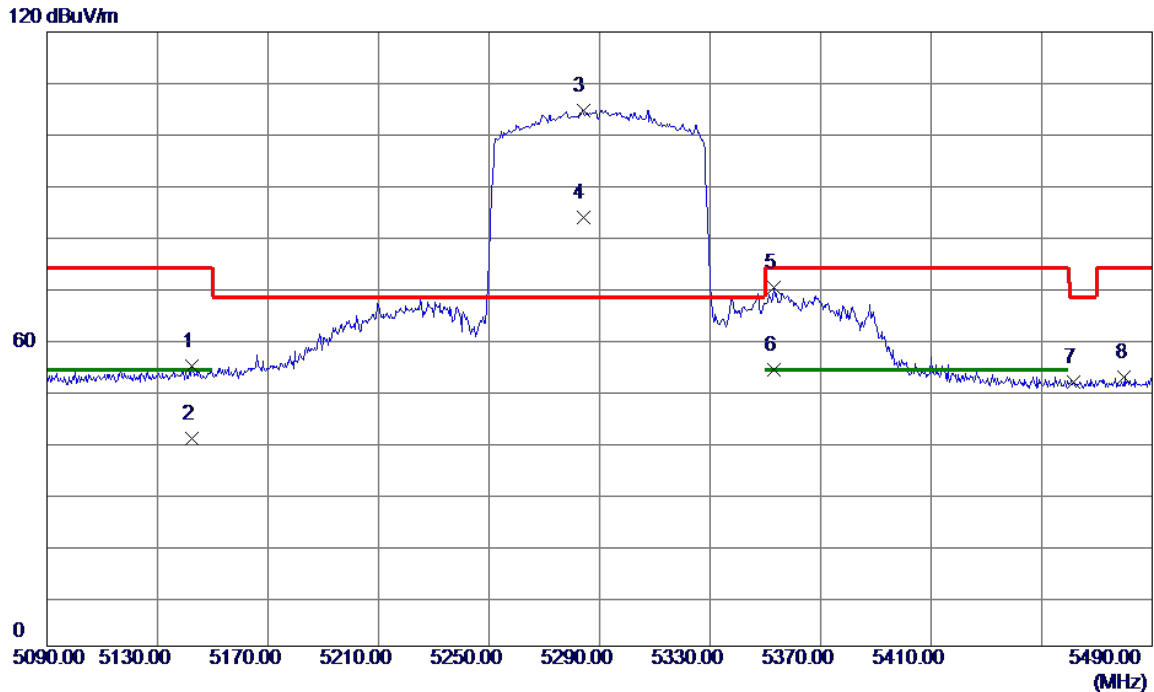


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5142.4000	46.18	8.62	54.80	74.00	-19.20	Peak	
2	5142.4000	32.02	8.62	40.64	54.00	-13.36	AVG	
3 *	5284.0000	95.99	8.71	104.70	68.20	36.50	Peak	No Limit
4	5284.0000	75.03	8.71	83.74	999.00	-915.26	AVG	No Limit
5	5353.2000	61.24	8.76	70.00	74.00	-4.00	Peak	
6	5353.2000	45.21	8.76	53.97	54.00	-0.03	AVG	
7	5461.6000	42.84	8.83	51.67	68.20	-16.53	Peak	
8	5480.0000	43.70	8.84	52.54	74.00	-21.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/5/29
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

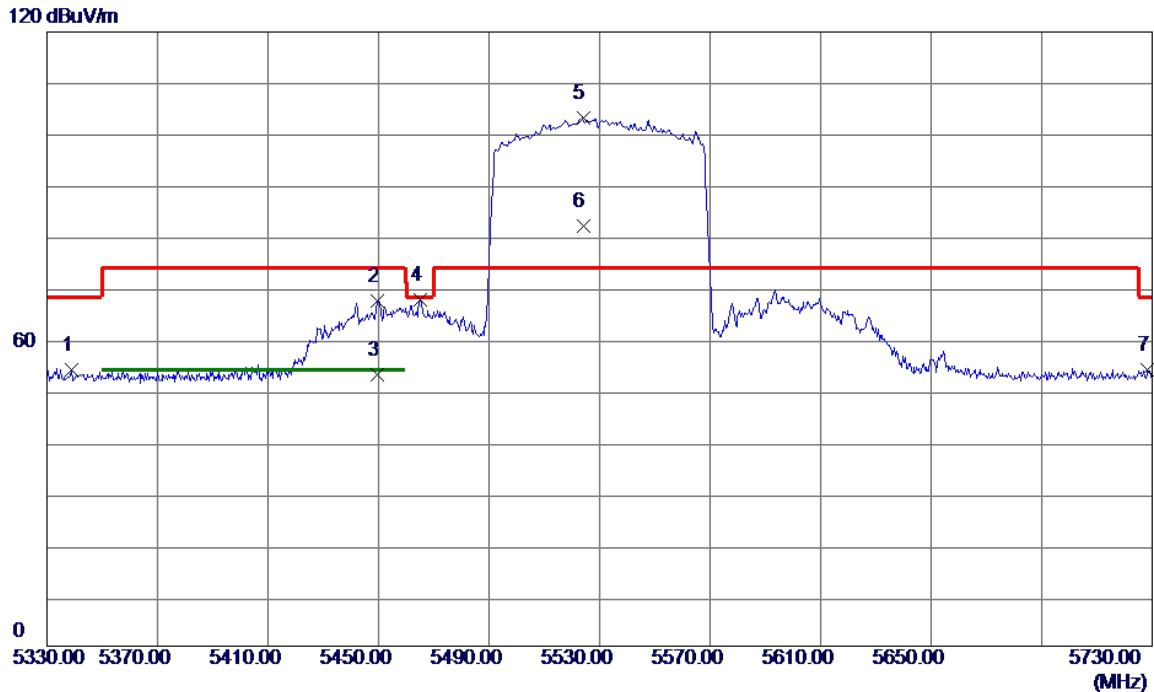


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5338.8000	45.34	8.75	54.09	68.20	-14.11	Peak	
2	5449.6000	58.72	8.82	67.54	74.00	-6.46	Peak	
3	5449.6000	44.31	8.82	53.13	54.00	-0.87	AVG	
4	5465.2000	58.74	8.83	67.57	68.20	-0.63	Peak	
5 *	5524.0000	94.36	8.93	103.29	74.00	29.29	Peak	No Limit
6	5524.0000	73.19	8.93	82.12	999.00	-916.88	AVG	No Limit
7	5728.4000	44.29	9.61	53.90	68.20	-14.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/5/29
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

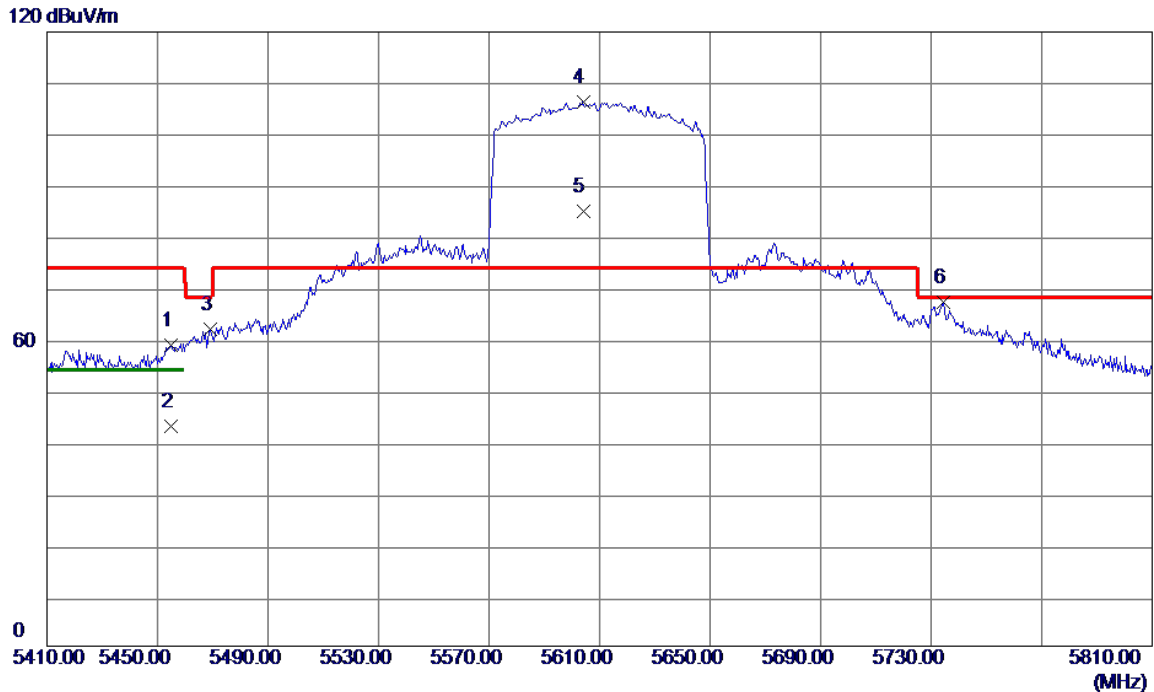


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5454.8000	49.97	8.82	58.79	74.00	-15.21	Peak	
2	5454.8000	34.06	8.82	42.88	54.00	-11.12	AVG	
3	5469.2000	53.15	8.83	61.98	68.20	-6.22	Peak	
4 *	5604.0000	97.08	9.20	106.28	74.00	32.28	Peak	No Limit
5	5604.0000	75.76	9.20	84.96	999.00	-914.04	AVG	No Limit
6	5734.4000	57.48	9.63	67.11	68.20	-1.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/5/29
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

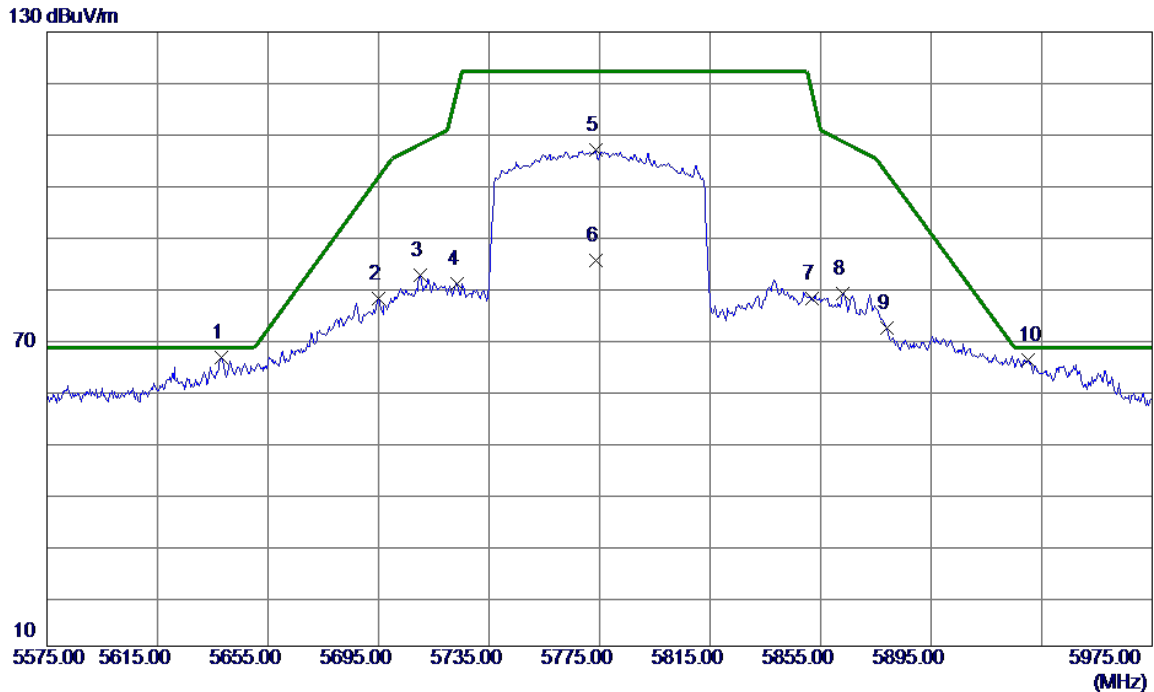


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5638.2000	57.07	9.31	66.38	68.20	-1.82	Peak	
2	5695.0000	68.42	9.50	77.92	101.51	-23.59	Peak	
3	5710.2000	72.84	9.55	82.39	108.06	-25.67	Peak	
4	5723.2670	71.27	9.59	80.86	118.25	-37.39	Peak	
5	5773.8000	97.12	9.76	106.88	122.20	-15.32	Peak	No Limit
6	5773.8000	75.67	9.76	85.43	122.20	-36.77	AVG	No Limit
7	5851.8000	67.81	10.02	77.83	118.09	-40.26	Peak	
8	5863.0000	68.83	10.06	78.89	108.56	-29.67	Peak	
9	5879.0000	61.97	10.11	72.08	102.23	-30.15	Peak	
10	5930.2000	55.63	10.28	65.91	68.20	-2.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/5/29
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

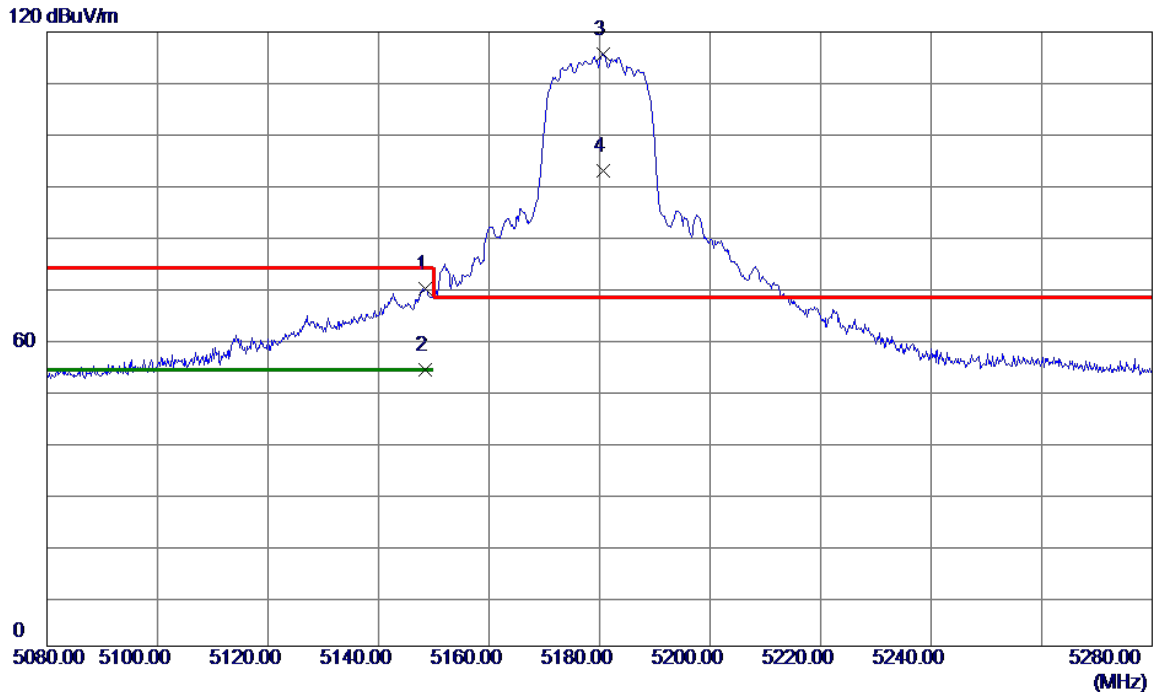


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.4000	61.30	8.62	69.92	74.00	-4.08	Peak	
2	5148.4000	45.30	8.62	53.92	54.00	-0.08	AVG	
3 *	5180.6000	107.08	8.65	115.73	68.20	47.53	Peak	No Limit
4	5180.6000	84.20	8.65	92.85	999.00	-906.15	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/5/29
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

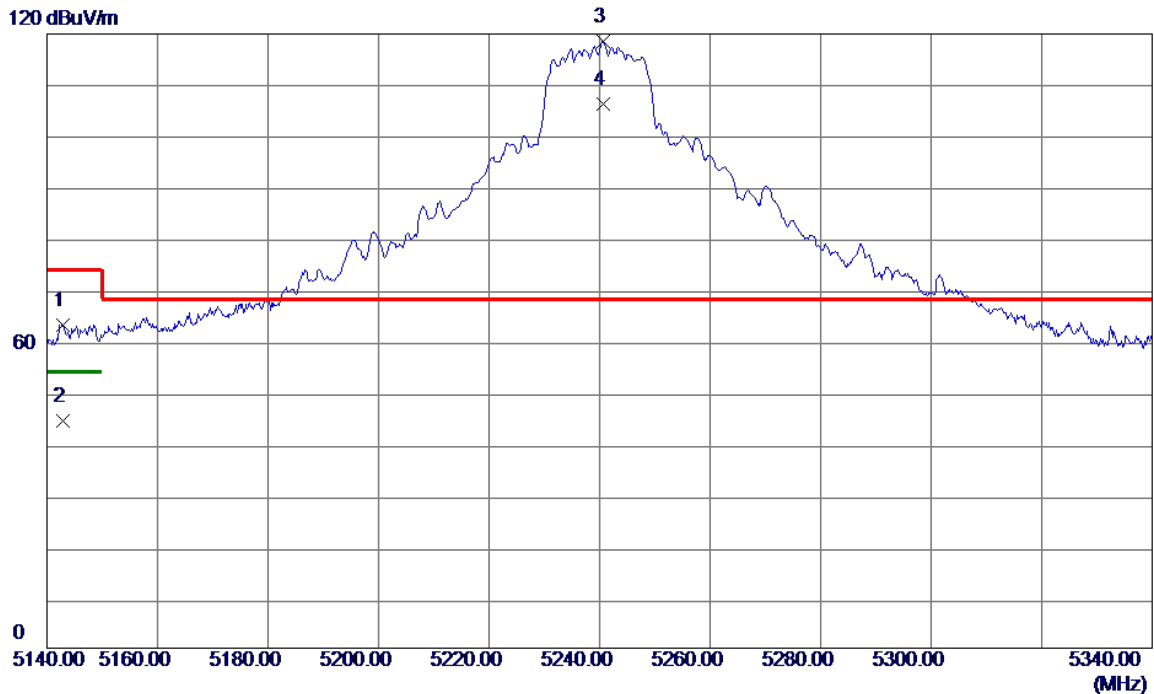


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5142.8000	54.58	8.62	63.20	74.00	-10.80	Peak	
2	5142.8000	35.81	8.62	44.43	54.00	-9.57	AVG	
3 *	5240.6000	109.86	8.68	118.54	68.20	50.34	Peak	No Limit
4	5240.6000	97.68	8.68	106.36	999.00	-892.64	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/5/29
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

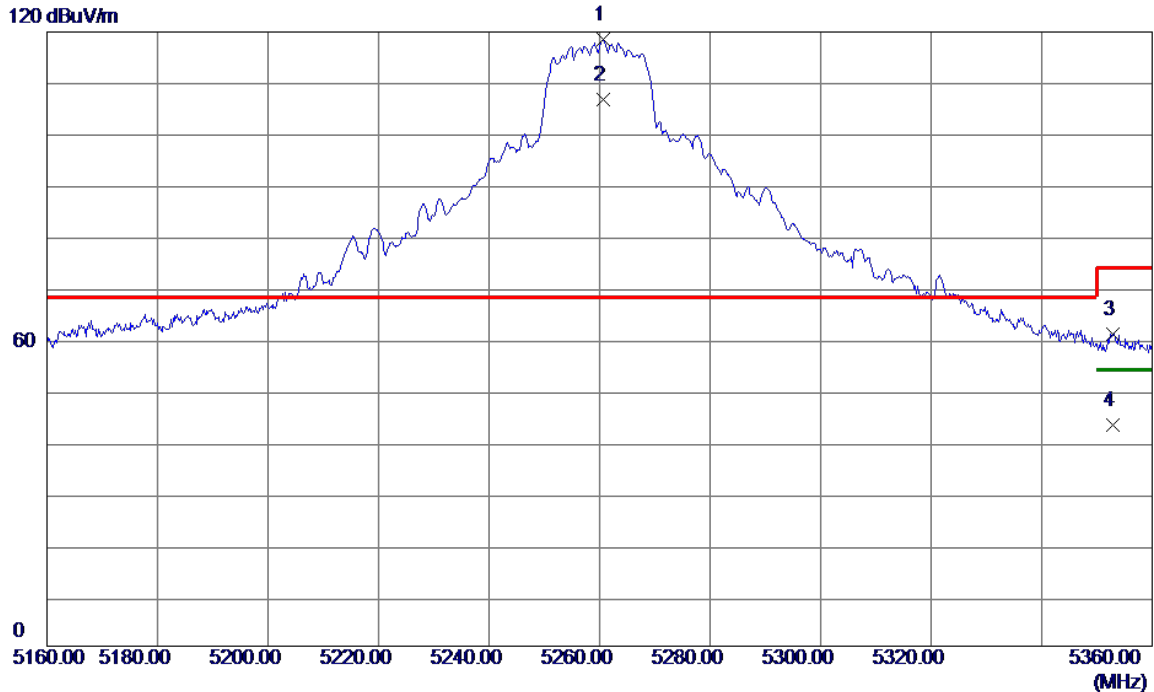


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5260.6000	109.76	8.70	118.46	68.20	50.26	Peak	No Limit
2	5260.6000	98.02	8.70	106.72	999.00	-892.28	AVG	No Limit
3	5352.8000	52.31	8.76	61.07	74.00	-12.93	Peak	
4	5352.8000	34.52	8.76	43.28	54.00	-10.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/5/29
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

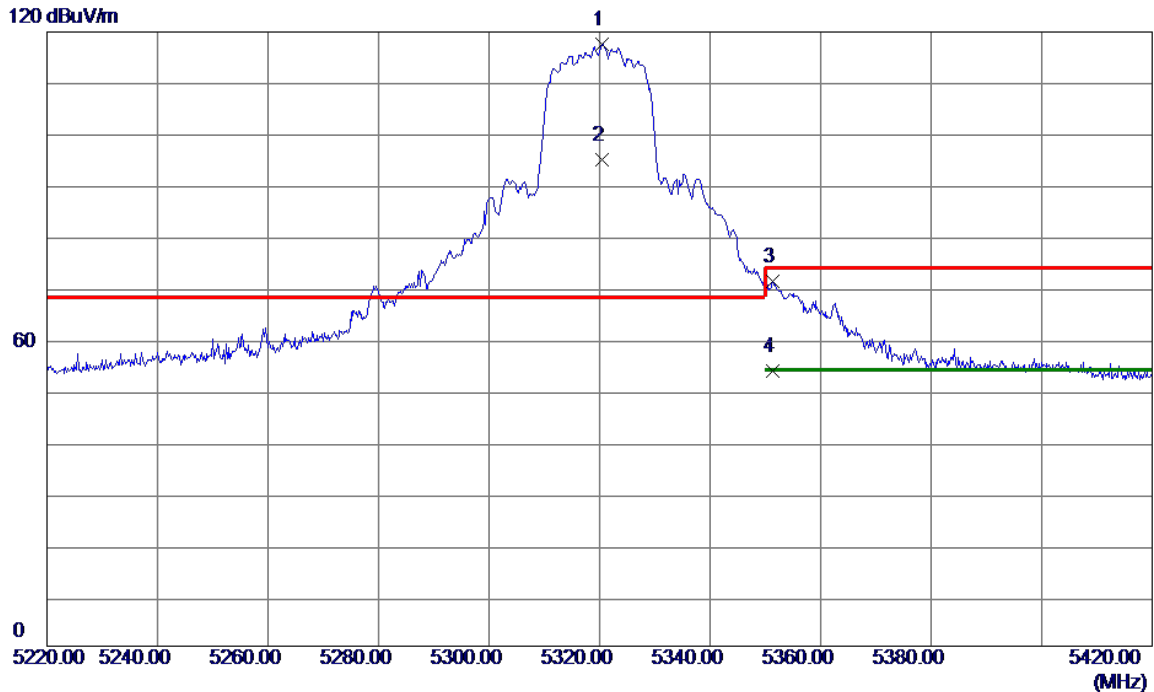


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5320.4000	108.88	8.73	117.61	68.20	49.41	Peak	No Limit
2	5320.4000	86.36	8.73	95.09	999.00	-903.91	AVG	No Limit
3	5351.4000	62.50	8.75	71.25	74.00	-2.75	Peak	
4	5351.4000	45.11	8.75	53.86	54.00	-0.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/5/29
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

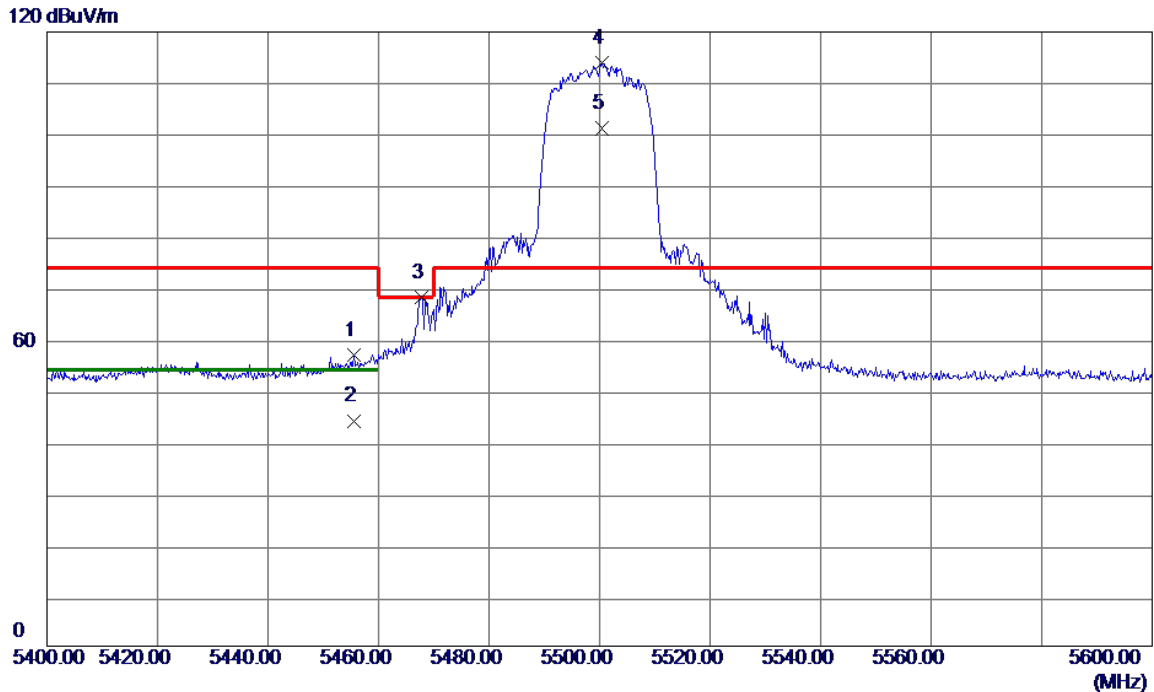


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5455.6000	48.14	8.82	56.96	74.00	-17.04	Peak	
2	5455.6000	35.22	8.82	44.04	54.00	-9.96	AVG	
3	5467.8000	59.31	8.83	68.14	68.20	-0.06	Peak	
4 *	5500.4000	105.24	8.85	114.09	74.00	40.09	Peak	No Limit
5	5500.4000	92.31	8.85	101.16	999.00	-897.84	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/5/29
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

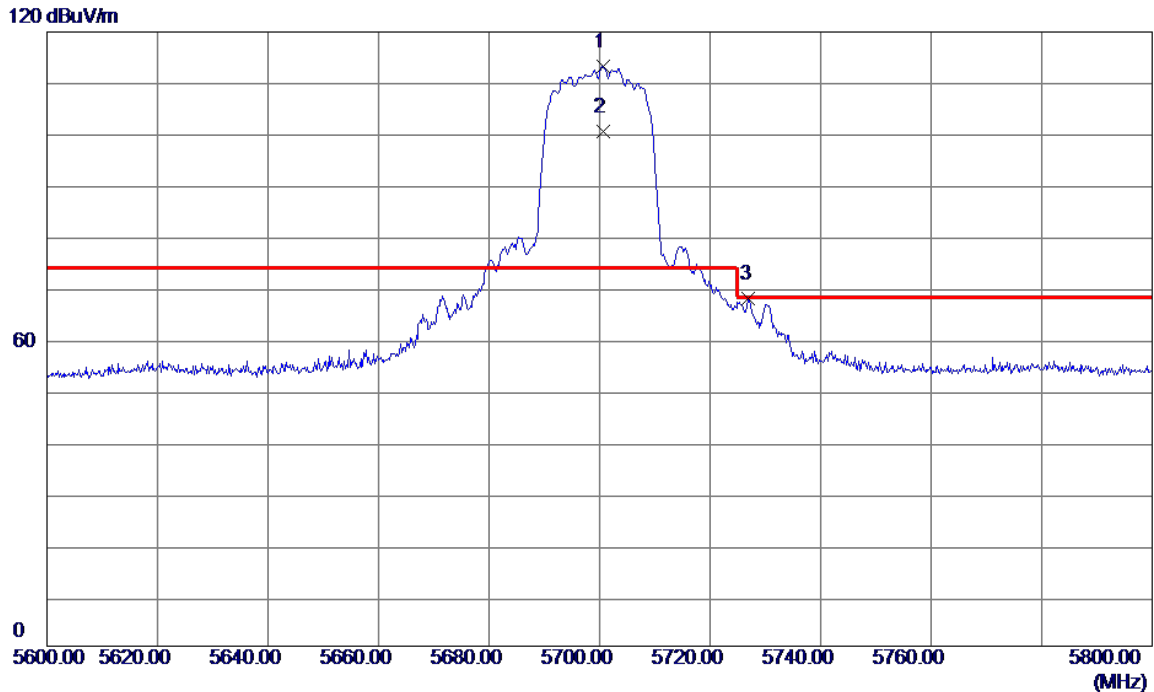


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5700.6000	103.86	9.52	113.38	74.00	39.38	Peak	No Limit
2	5700.6000	91.13	9.52	100.65	999.00	-898.35	AVG	No Limit
3	5727.0000	58.32	9.60	67.92	68.20	-0.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/5/29
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

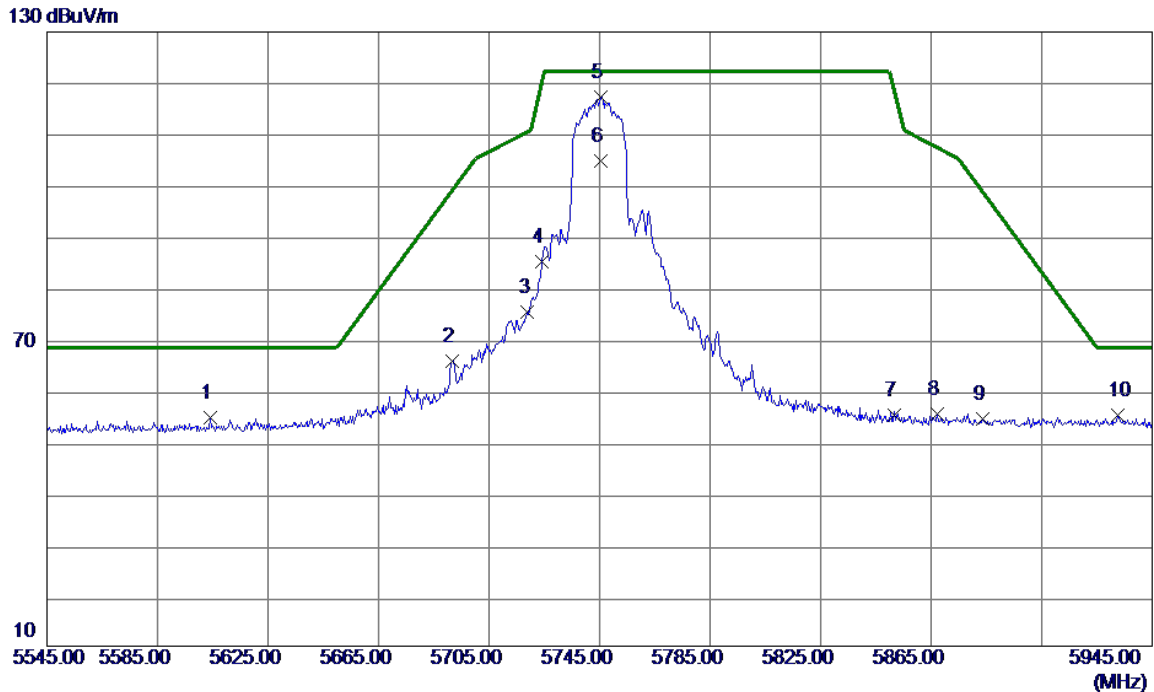


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5604.2000	45.52	9.20	54.72	68.20	-13.48	Peak	
2	5691.8000	56.13	9.49	65.62	99.15	-33.53	Peak	
3	5719.0000	65.80	9.58	75.38	110.52	-35.14	Peak	
4	5724.2000	75.56	9.59	85.15	120.38	-35.23	Peak	
5 *	5745.4000	107.69	9.66	117.35	122.20	-4.85	Peak	No Limit
6	5745.4000	95.17	9.66	104.83	122.20	-17.37	AVG	No Limit
7	5851.6669	45.12	10.02	55.14	118.40	-63.26	Peak	
8	5867.4000	45.28	10.07	55.35	107.33	-51.98	Peak	
9	5883.8000	44.33	10.12	54.45	98.67	-44.22	Peak	
10	5932.6000	44.93	10.29	55.22	68.20	-12.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/5/29
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

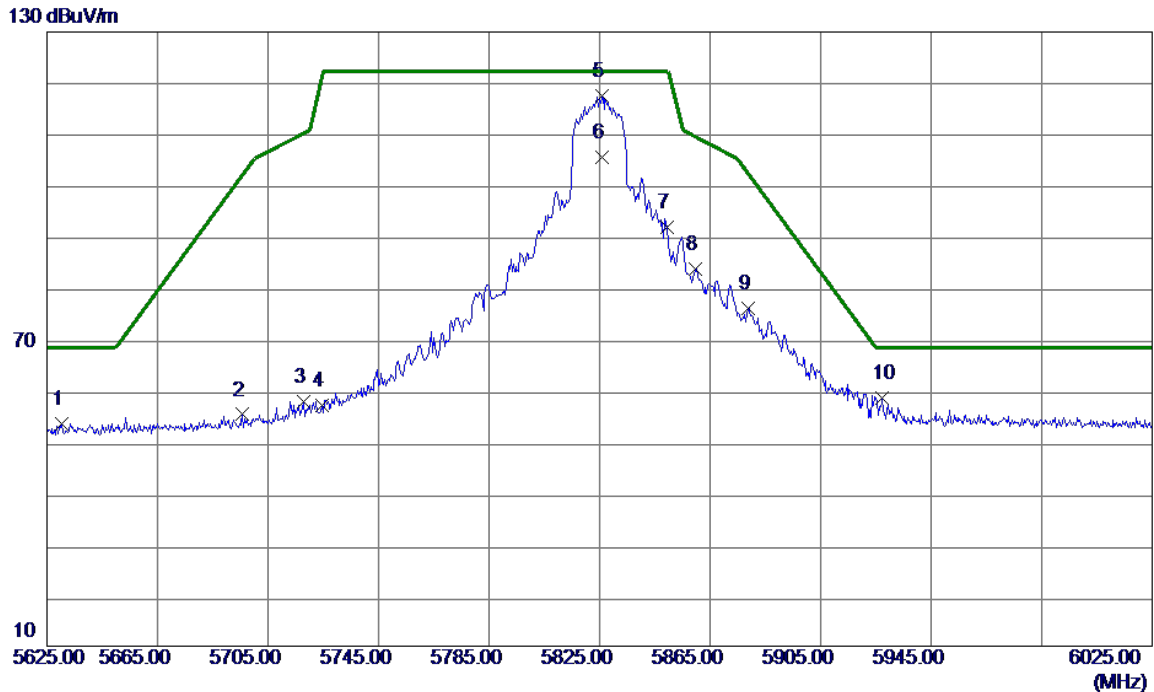


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5630.2000	44.15	9.28	53.43	68.20	-14.77	Peak	
2	5695.8000	45.74	9.50	55.24	102.10	-46.86	Peak	
3	5717.8000	48.21	9.57	57.78	110.18	-52.40	Peak	
4	5724.6000	47.47	9.60	57.07	121.29	-64.22	Peak	
5 *	5825.8000	107.69	9.93	117.62	122.20	-4.58	Peak	No Limit
6	5825.8000	95.58	9.93	105.51	122.20	-16.69	AVG	No Limit
7	5849.4000	81.71	10.01	91.72	122.20	-30.48	Peak	
8	5859.8000	73.69	10.04	83.73	109.45	-25.72	Peak	
9	5878.6000	65.84	10.11	75.95	102.53	-26.58	Peak	
10	5927.4000	48.21	10.27	58.48	68.20	-9.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/5/29
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

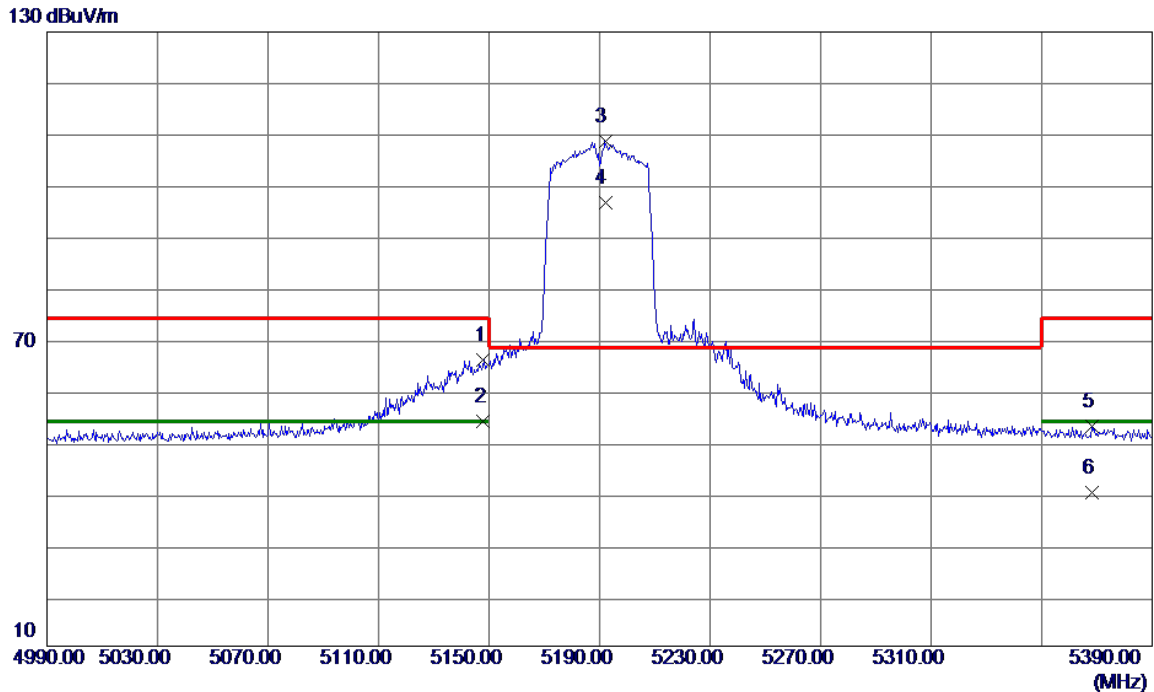


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.0000	57.30	8.62	65.92	74.00	-8.08	Peak	
2	5148.0000	45.37	8.62	53.99	54.00	-0.01	AVG	
3 *	5192.0000	99.91	8.65	108.56	68.20	40.36	Peak	No Limit
4	5192.0000	88.04	8.65	96.69	999.00	-902.31	AVG	No Limit
5	5368.4000	44.21	8.77	52.98	74.00	-21.02	Peak	
6	5368.4000	31.30	8.77	40.07	54.00	-13.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/5/29
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

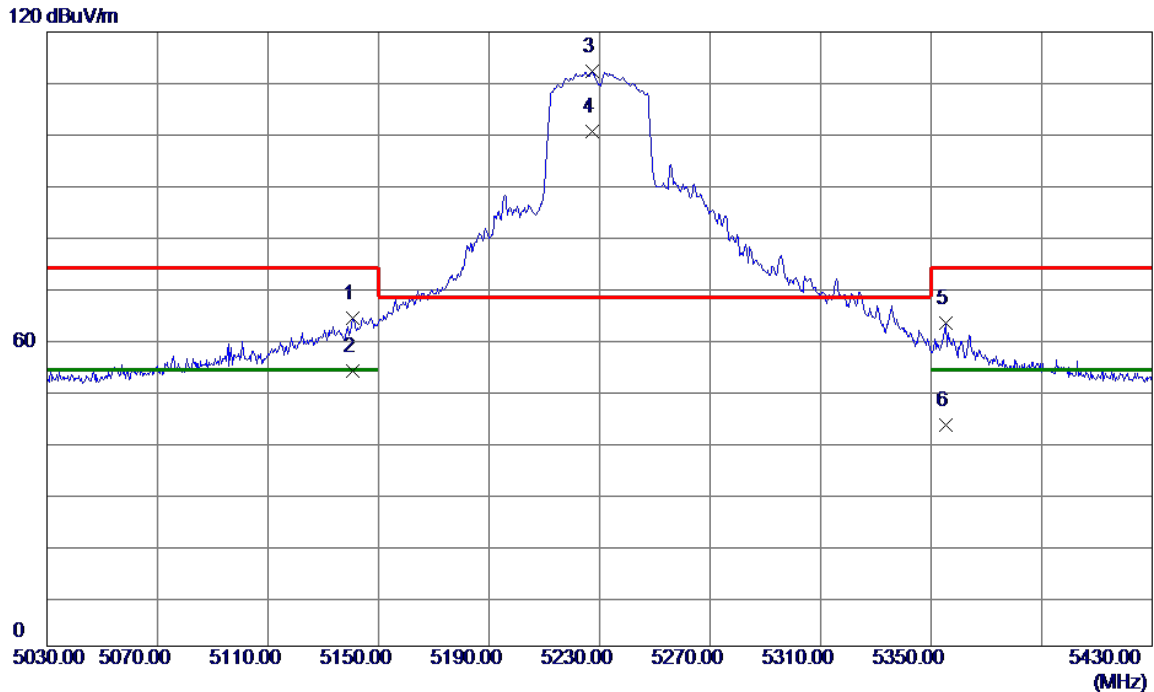


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5140.8000	55.49	8.62	64.11	74.00	-9.89	Peak	
2	5140.8000	45.15	8.62	53.77	54.00	-0.23	AVG	
3 *	5227.2000	103.54	8.68	112.22	68.20	44.02	Peak	No Limit
4	5227.2000	91.98	8.68	100.66	999.00	-898.34	AVG	No Limit
5	5355.2000	54.45	8.76	63.21	74.00	-10.79	Peak	
6	5355.2000	34.44	8.76	43.20	54.00	-10.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/5/29
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

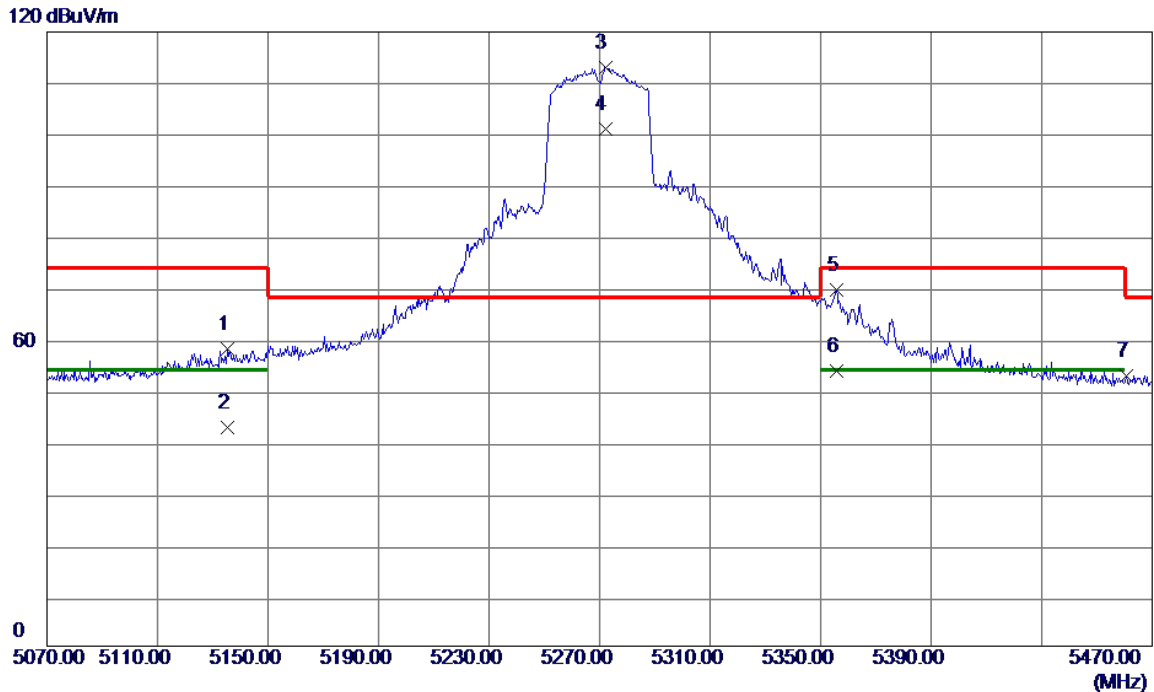


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5135.2000	49.54	8.62	58.16	74.00	-15.84	Peak	
2	5135.2000	34.13	8.62	42.75	54.00	-11.25	AVG	
3 *	5272.0000	104.43	8.70	113.13	68.20	44.93	Peak	No Limit
4	5272.0000	92.32	8.70	101.02	999.00	-897.98	AVG	No Limit
5	5355.6000	60.86	8.76	69.62	74.00	-4.38	Peak	
6	5355.6000	45.01	8.76	53.77	54.00	-0.23	AVG	
7	5460.8000	44.01	8.82	52.83	68.20	-15.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/5/29
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

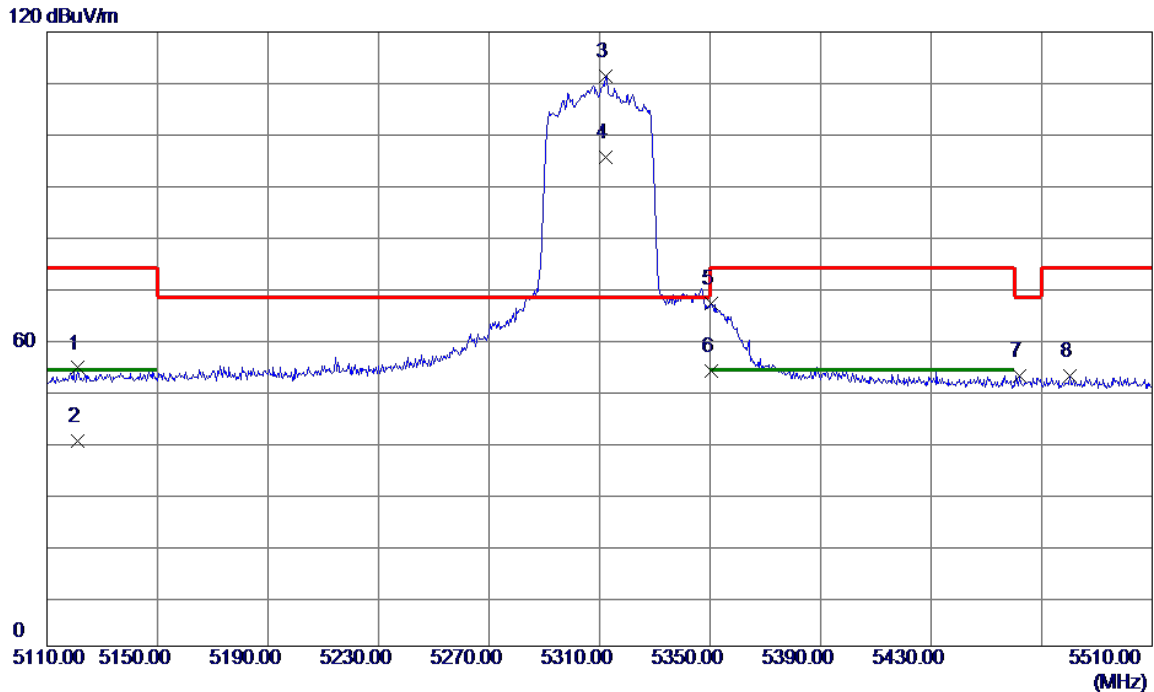


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5121.2000	45.75	8.61	54.36	74.00	-19.64	Peak	
2	5121.2000	31.49	8.61	40.10	54.00	-13.90	AVG	
3 *	5312.4000	102.73	8.73	111.46	68.20	43.26	Peak	No Limit
4	5312.4000	86.83	8.73	95.56	999.00	-903.44	AVG	No Limit
5	5350.4000	58.28	8.75	67.03	74.00	-6.97	Peak	
6	5350.4000	45.01	8.75	53.76	54.00	-0.24	AVG	
7	5462.0000	44.07	8.83	52.90	68.20	-15.30	Peak	
8	5480.4000	43.89	8.84	52.73	74.00	-21.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/5/29
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

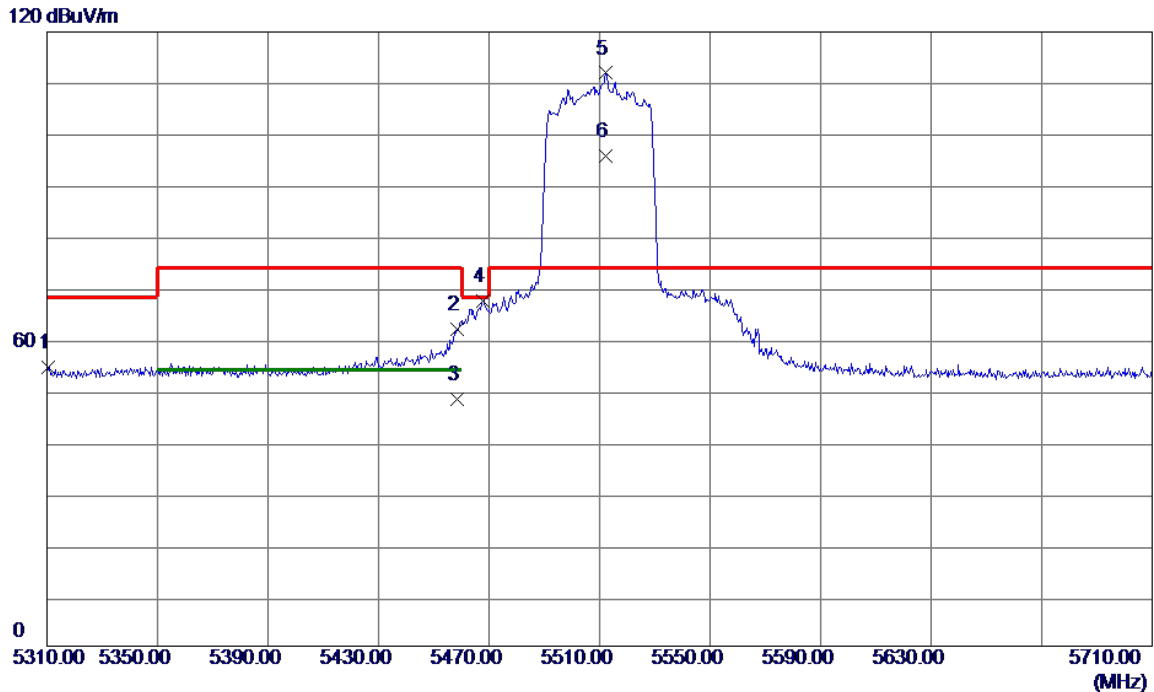


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5310.4000	45.86	8.73	54.59	68.20	-13.61	Peak	
2	5458.4000	53.08	8.82	61.90	74.00	-12.10	Peak	
3	5458.4000	39.50	8.82	48.32	54.00	-5.68	AVG	
4	5467.6000	58.67	8.83	67.50	68.20	-0.70	Peak	
5 *	5512.4000	103.07	8.89	111.96	74.00	37.96	Peak	No Limit
6	5512.4000	86.76	8.89	95.65	999.00	-903.35	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/5/29
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

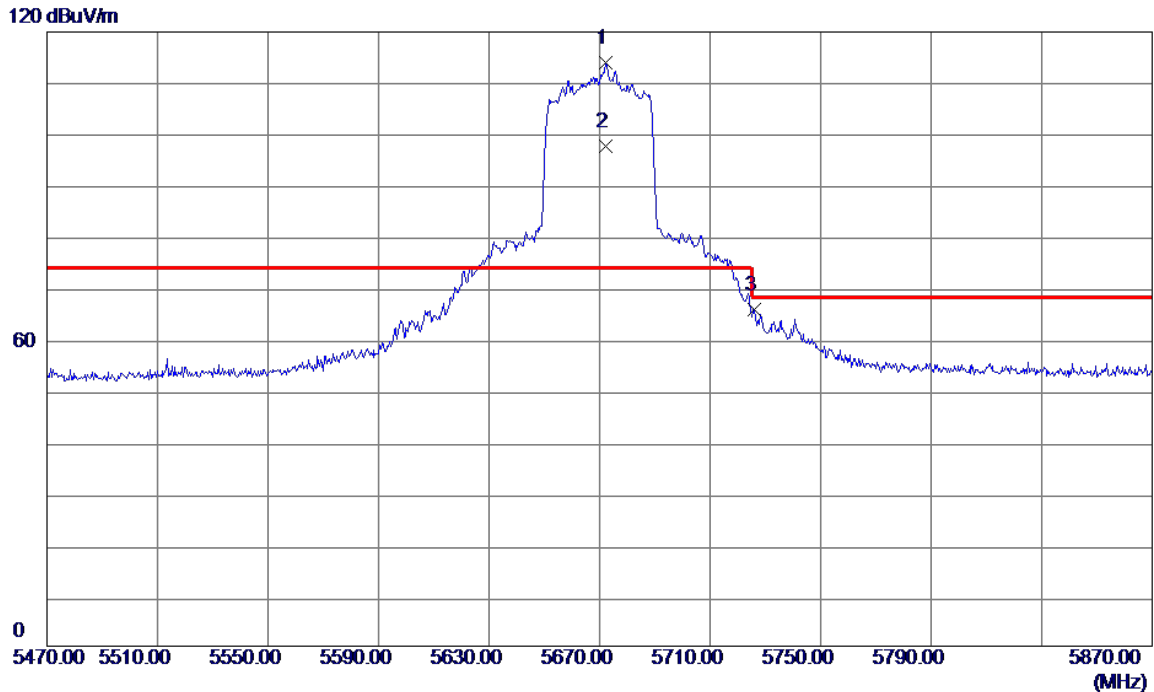


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5672.4000	104.67	9.42	114.09	74.00	40.09	Peak	No Limit
2	5672.4000	88.31	9.42	97.73	999.00	-901.27	AVG	No Limit
3	5726.0000	56.21	9.60	65.81	68.20	-2.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/5/29
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

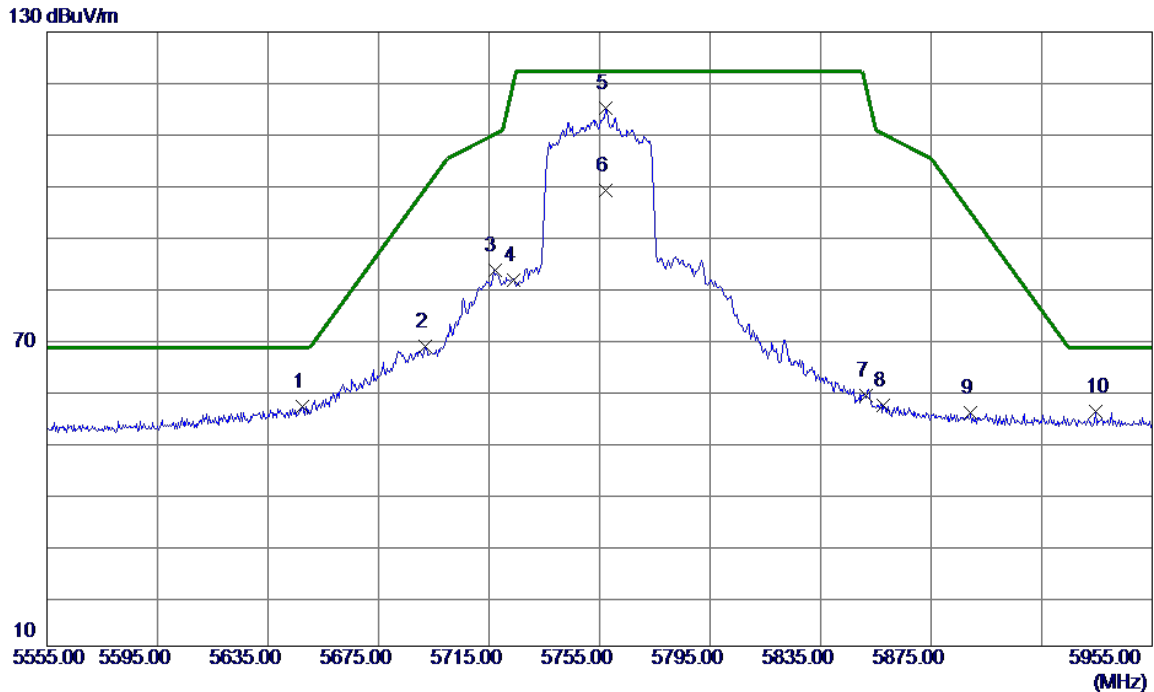


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5647.4000	47.54	9.34	56.88	68.20	-11.32	Peak	
2	5691.8000	59.12	9.49	68.61	99.15	-30.54	Peak	
3	5717.0000	73.80	9.57	83.37	109.96	-26.59	Peak	
4	5724.0670	71.87	9.59	81.46	120.07	-38.61	Peak	
5 *	5757.4000	105.30	9.70	115.00	122.20	-7.20	Peak	No Limit
6	5757.4000	89.30	9.70	99.00	122.20	-23.20	AVG	No Limit
7	5851.5330	48.90	10.02	58.92	118.70	-59.78	Peak	
8	5857.8000	47.07	10.04	57.11	110.01	-52.90	Peak	
9	5889.4000	45.45	10.14	55.59	94.51	-38.92	Peak	
10	5934.6000	45.49	10.29	55.78	68.20	-12.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/5/29
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

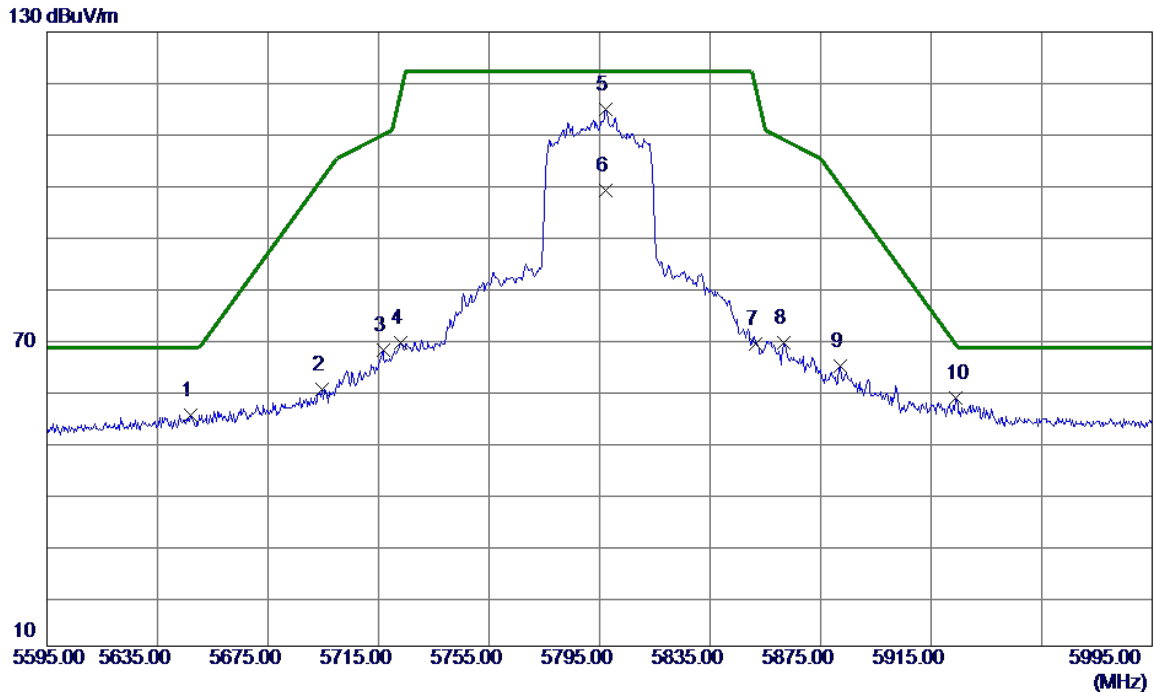


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5647.0000	45.86	9.34	55.20	68.20	-13.00	Peak	
2	5694.6000	50.75	9.50	60.25	101.22	-40.97	Peak	
3	5716.6000	58.34	9.57	67.91	109.85	-41.94	Peak	
4	5723.0000	59.72	9.59	69.31	117.64	-48.33	Peak	
5 *	5797.4000	105.06	9.84	114.90	122.20	-7.30	Peak	No Limit
6	5797.4000	89.15	9.84	98.99	122.20	-23.21	AVG	No Limit
7	5851.5330	59.09	10.02	69.11	118.70	-49.59	Peak	
8	5861.8000	59.15	10.05	69.20	108.89	-39.69	Peak	
9	5882.2000	54.59	10.12	64.71	99.85	-35.14	Peak	
10	5923.8000	48.16	10.26	58.42	69.08	-10.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/5/29
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

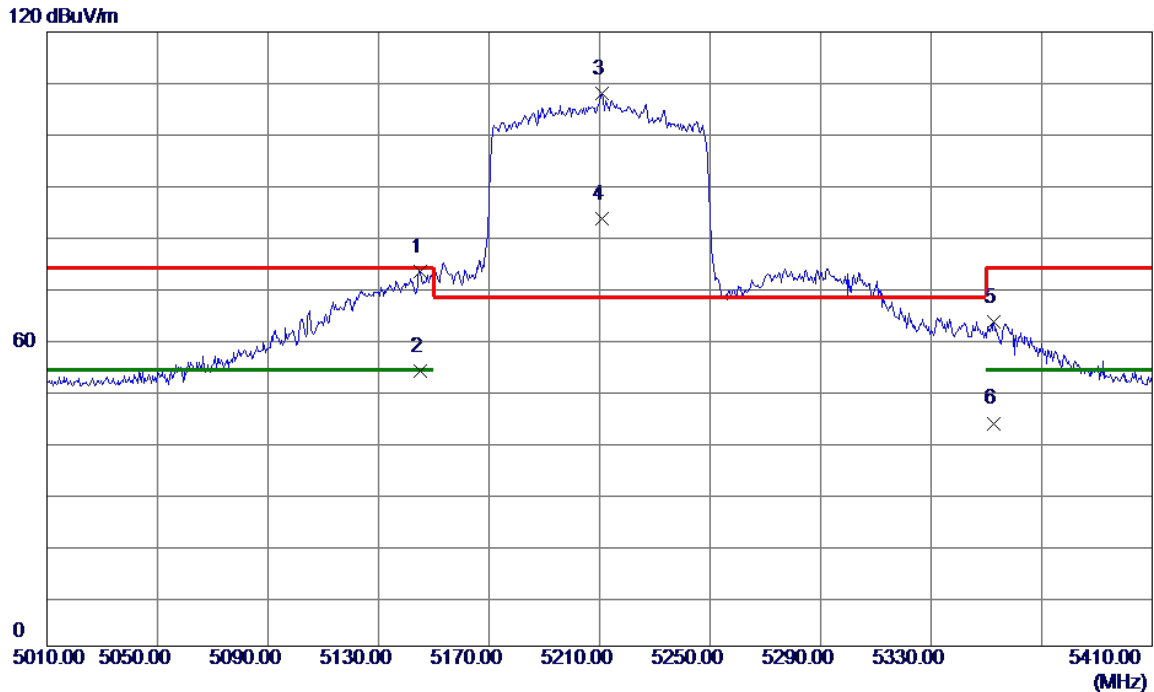


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.2000	64.66	8.62	73.28	74.00	-0.72	Peak	
2	5145.2000	45.09	8.62	53.71	54.00	-0.29	AVG	
3 *	5210.8000	99.42	8.66	108.08	68.20	39.88	Peak	No Limit
4	5210.8000	74.78	8.66	83.44	999.00	-915.56	AVG	No Limit
5	5352.8000	54.51	8.76	63.27	74.00	-10.73	Peak	
6	5352.8000	34.80	8.76	43.56	54.00	-10.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/5/29
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

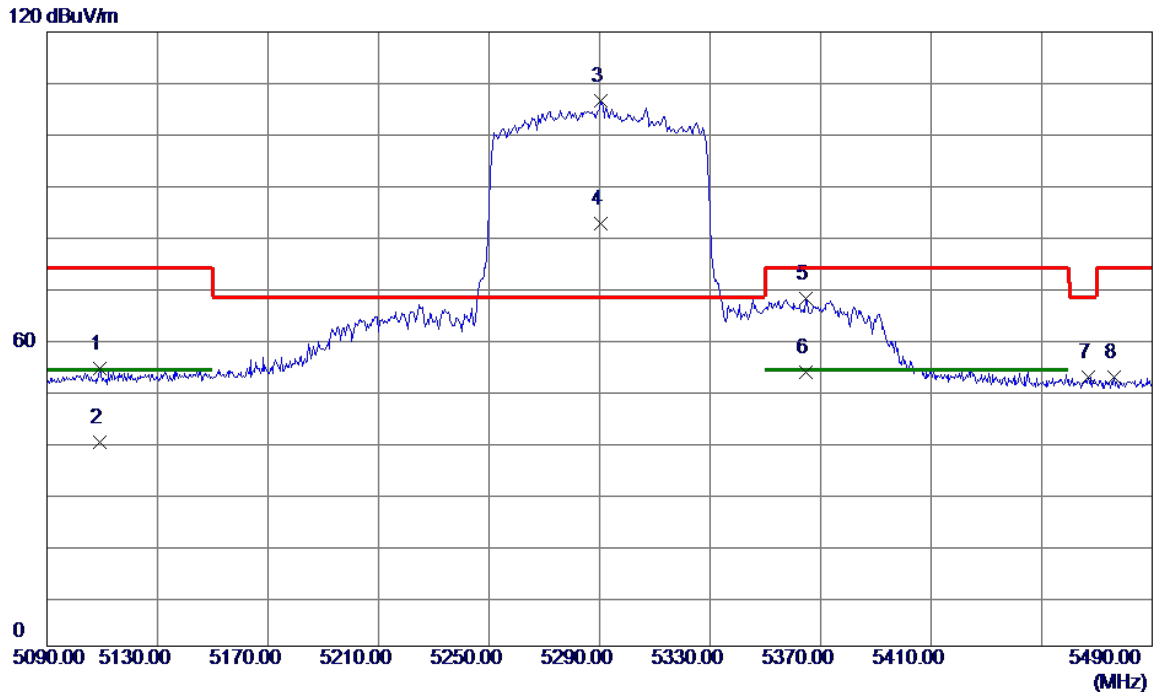


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5109.2000	45.55	8.60	54.15	74.00	-19.85	Peak	
2	5109.2000	31.32	8.60	39.92	54.00	-14.08	AVG	
3 *	5290.4000	97.86	8.72	106.58	68.20	38.38	Peak	No Limit
4	5290.4000	73.85	8.72	82.57	999.00	-916.43	AVG	No Limit
5	5364.8000	59.14	8.76	67.90	74.00	-6.10	Peak	
6	5364.8000	44.84	8.76	53.60	54.00	-0.40	AVG	
7	5466.8000	43.81	8.83	52.64	68.20	-15.56	Peak	
8	5476.4000	43.69	8.83	52.52	74.00	-21.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/5/29
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

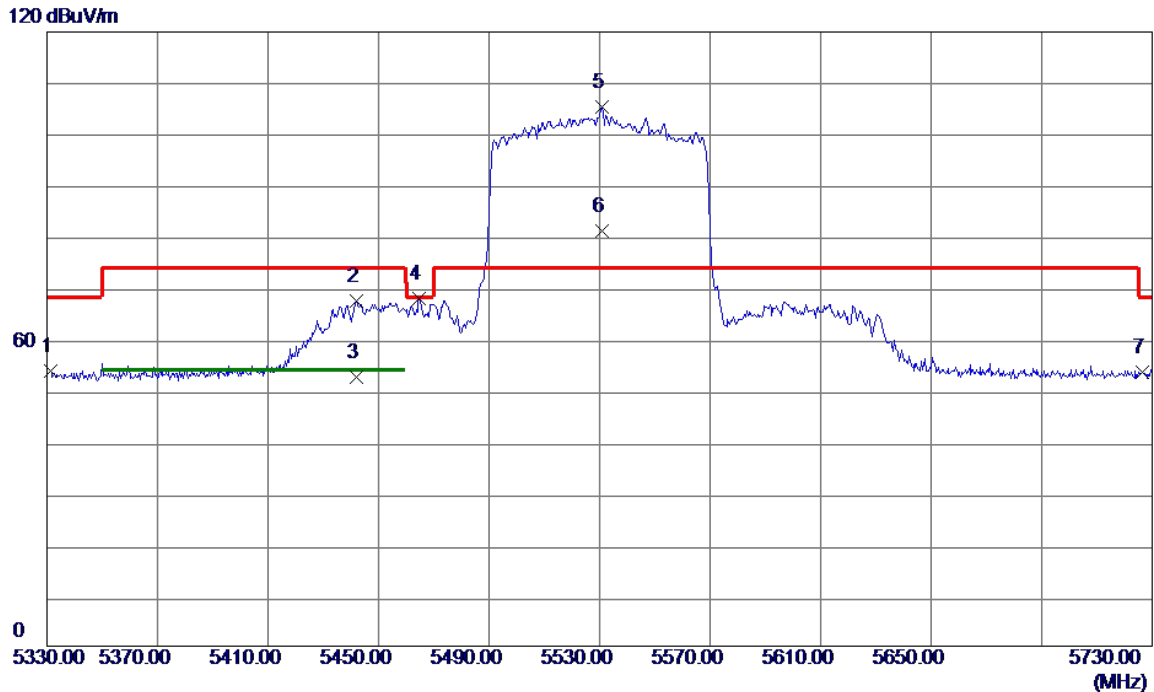


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5331.2000	44.98	8.74	53.72	68.20	-14.48	Peak	
2	5442.0000	58.68	8.81	67.49	74.00	-6.51	Peak	
3	5442.0000	43.70	8.81	52.51	54.00	-1.49	AVG	
4	5464.8000	59.10	8.83	67.93	68.20	-0.27	Peak	
5 *	5530.8000	96.38	8.95	105.33	74.00	31.33	Peak	No Limit
6	5530.8000	72.12	8.95	81.07	999.00	-917.93	AVG	No Limit
7	5726.4000	43.84	9.60	53.44	68.20	-14.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/5/29
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

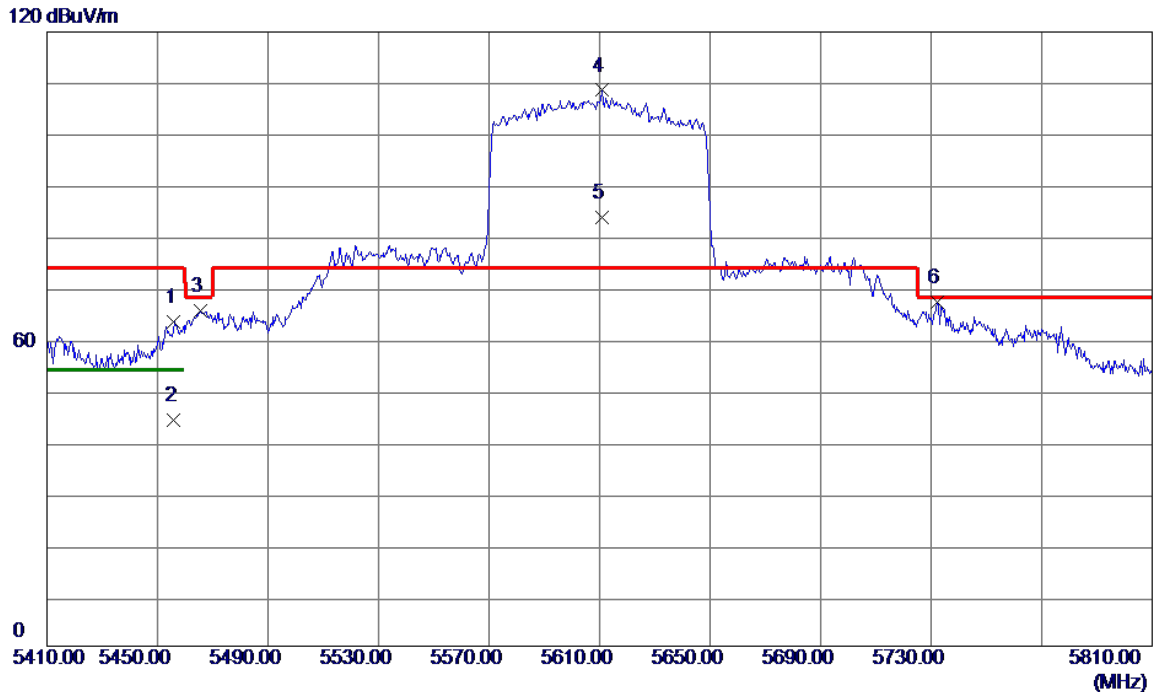


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.0000	54.48	8.82	63.30	74.00	-10.70	Peak	
2	5456.0000	35.24	8.82	44.06	54.00	-9.94	AVG	
3	5465.6000	56.65	8.83	65.48	68.20	-2.72	Peak	
4 *	5610.8000	99.38	9.22	108.60	74.00	34.60	Peak	No Limit
5	5610.8000	74.64	9.22	83.86	999.00	-915.14	AVG	No Limit
6	5732.4000	57.57	9.62	67.19	68.20	-1.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/5/29
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

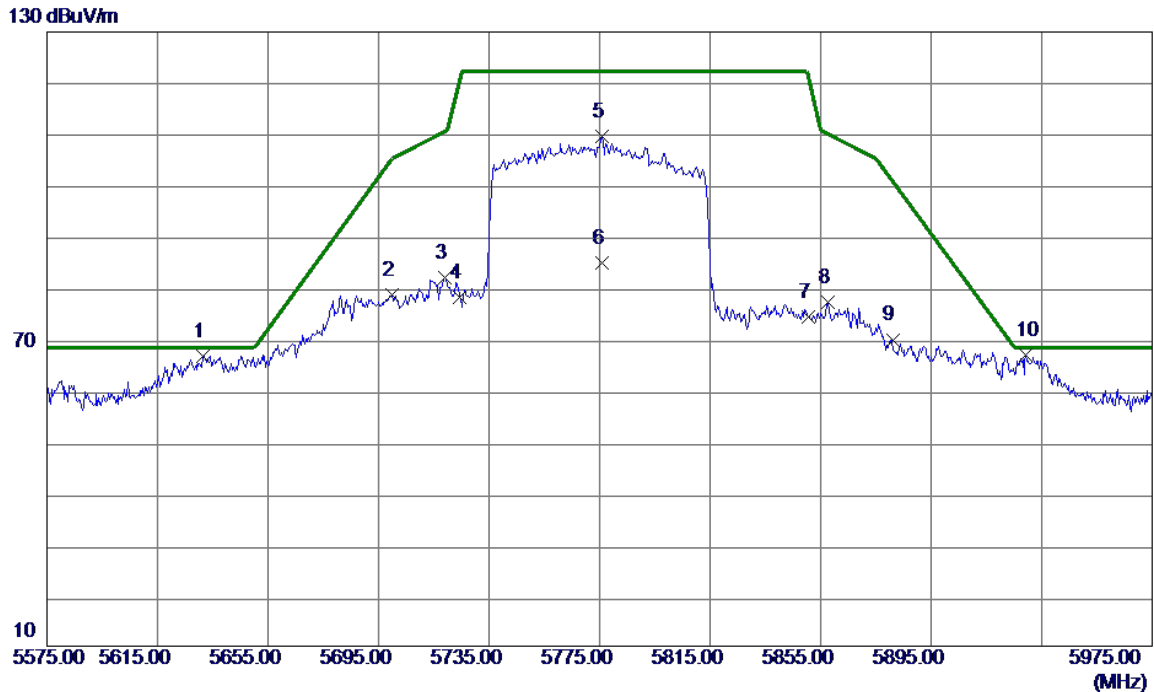


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5631.4000	57.43	9.29	66.72	68.20	-1.48	Peak	
2	5699.8000	69.24	9.51	78.75	105.05	-26.30	Peak	
3	5719.0000	72.49	9.58	82.07	110.52	-28.45	Peak	
4	5724.3330	68.59	9.59	78.18	120.68	-42.50	Peak	
5	5775.8000	99.90	9.77	109.67	122.20	-12.53	Peak	No Limit
6	5775.8000	75.04	9.77	84.81	122.20	-37.39	AVG	No Limit
7	5850.7330	64.34	10.01	74.35	120.53	-46.18	Peak	
8	5857.8000	67.10	10.04	77.14	110.01	-32.87	Peak	
9	5881.0000	59.77	10.11	69.88	100.74	-30.86	Peak	
10 *	5929.4000	56.54	10.28	66.82	68.20	-1.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

For Straddle Channel:

Test Mode	IEEE 802.11a	Test Date	2025/5/28
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

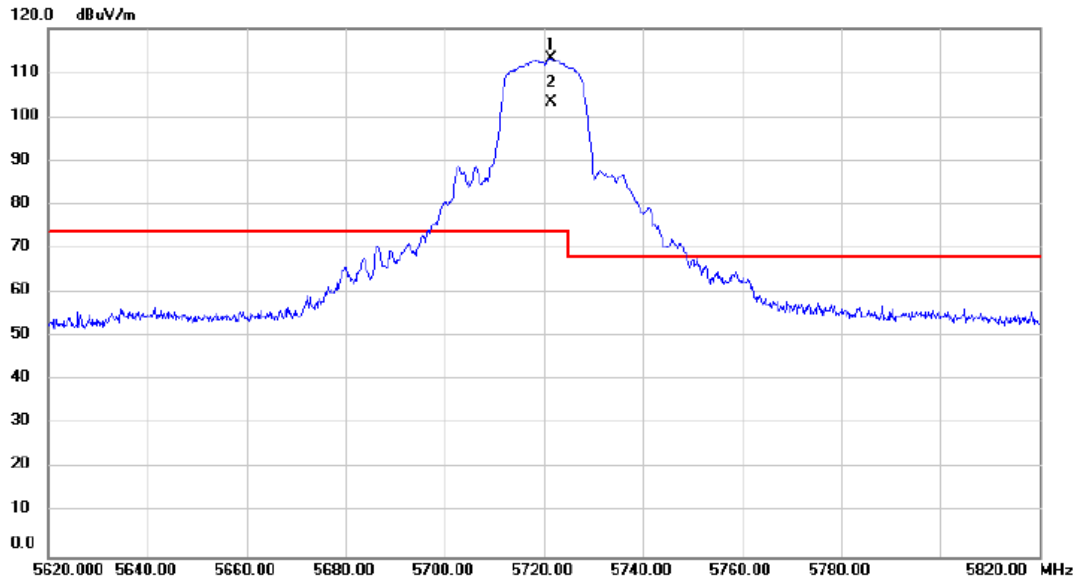


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5721.400	103.7	9.58	113.36	74.00	39.36	peak	No Limit
2	X	5721.400	93.91	9.58	103.49	74.00	29.49	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

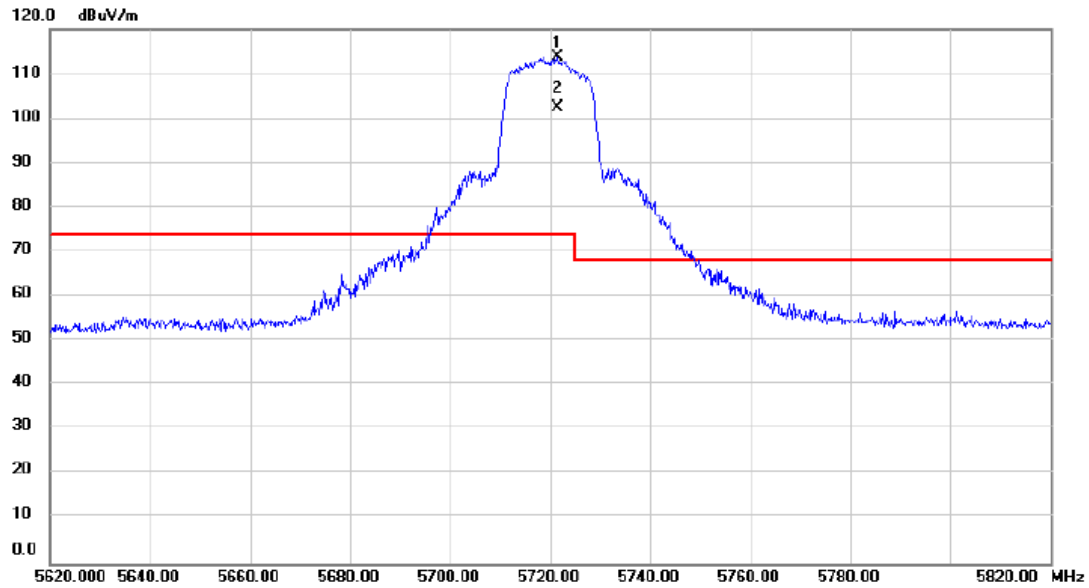


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5721.400	104.2	9.58	113.83	74.00	39.83	peak	No Limit
2	X	5721.400	92.99	9.58	102.57	74.00	28.57	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5710MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

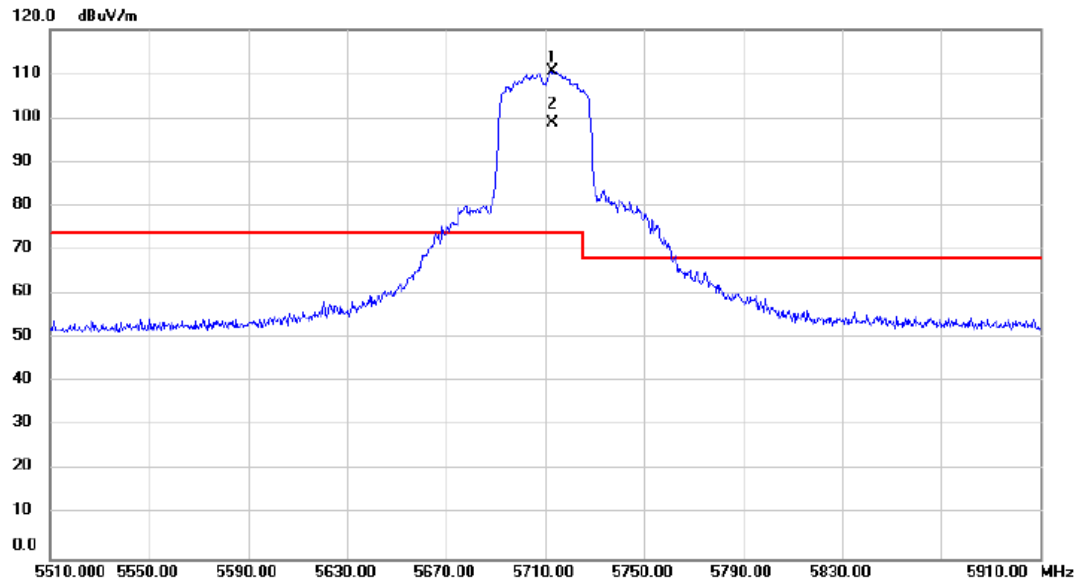


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5712.800	101.0	9.55	110.55	74.00	36.55	peak	No Limit
2	X	5712.800	89.16	9.55	98.71	74.00	24.71	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/5/29
Test Frequency	5690MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

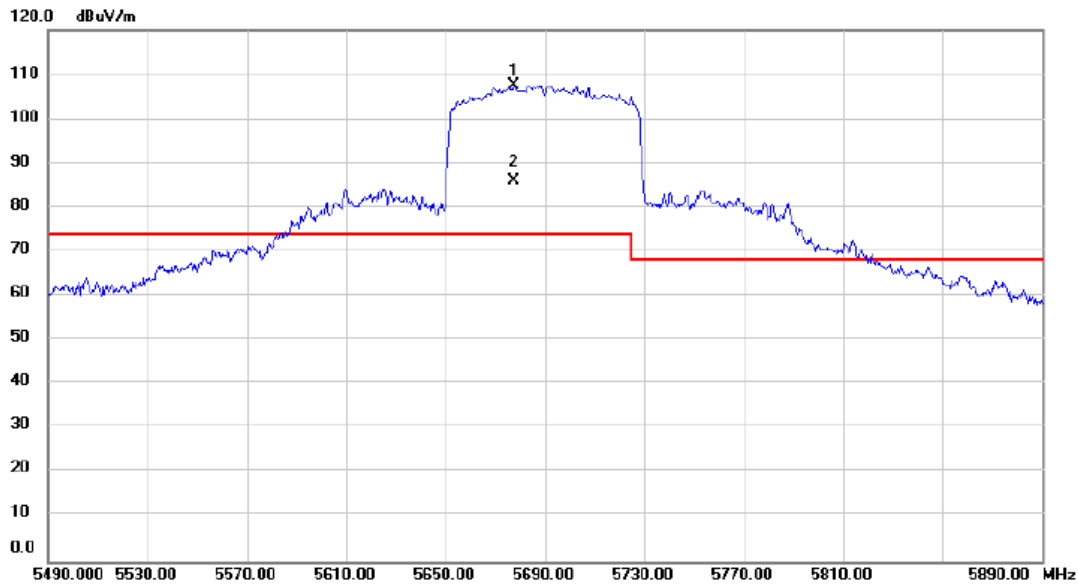


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5677.600	98.11	9.44	107.55	74.00	33.55	peak	No Limit
2	X	5677.600	76.44	9.44	85.88	74.00	11.88	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/5/29
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

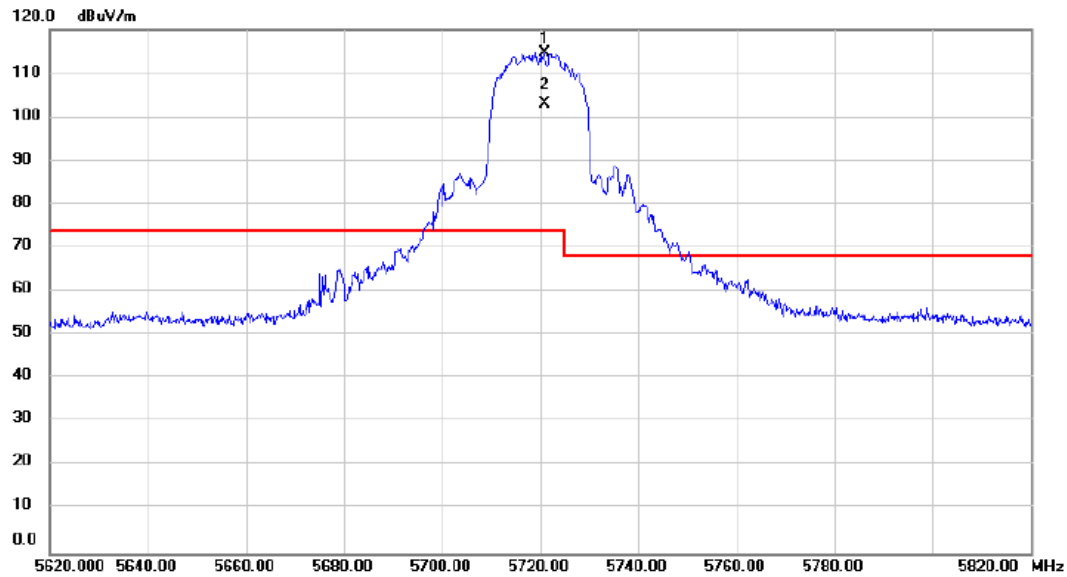


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5720.800	105.1	9.58	114.75	74.00	40.75	peak	No Limit
2	X	5720.800	93.60	9.58	103.18	74.00	29.18	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/5/29
Test Frequency	5710MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

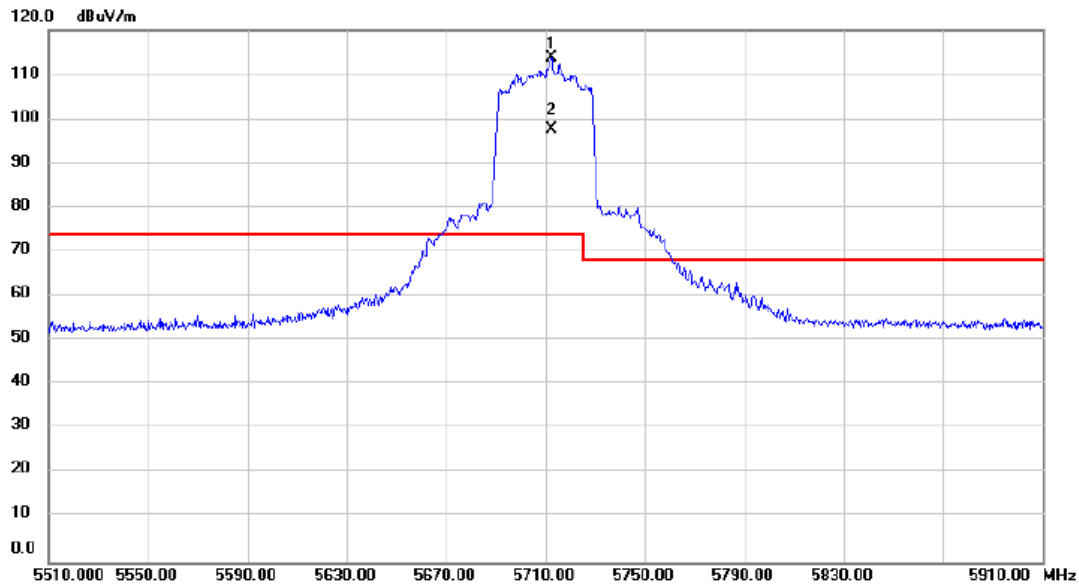


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5712.400	104.3	9.55	113.87	74.00	39.87	peak	No Limit
2	X	5712.400	88.05	9.55	97.60	74.00	23.60	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/5/29
Test Frequency	5690MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

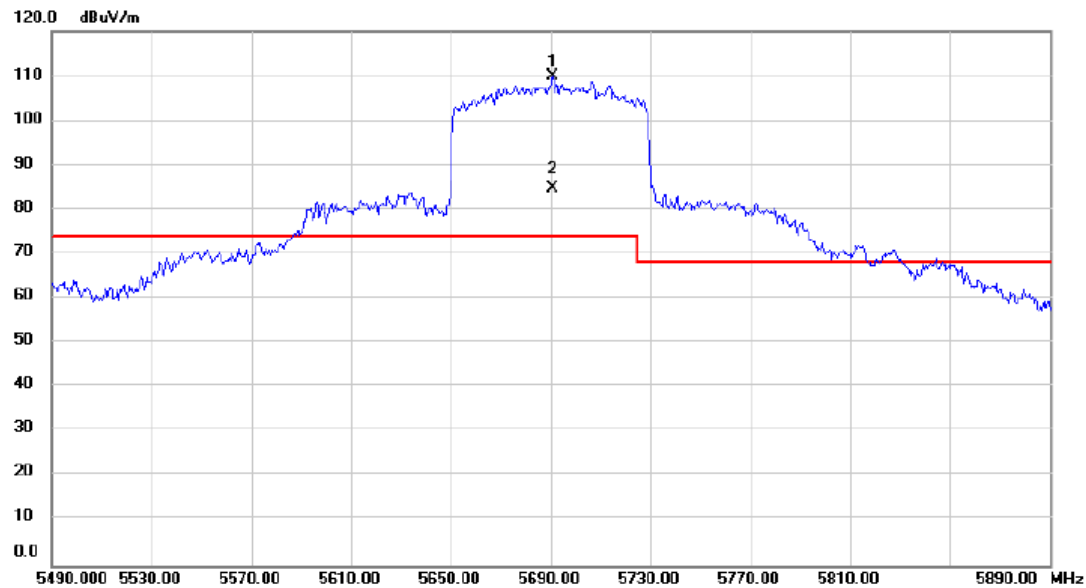


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5690.800	100.3	9.48	109.83	74.00	35.83	peak	No Limit
2	X	5690.800	75.31	9.48	84.79	74.00	10.79	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

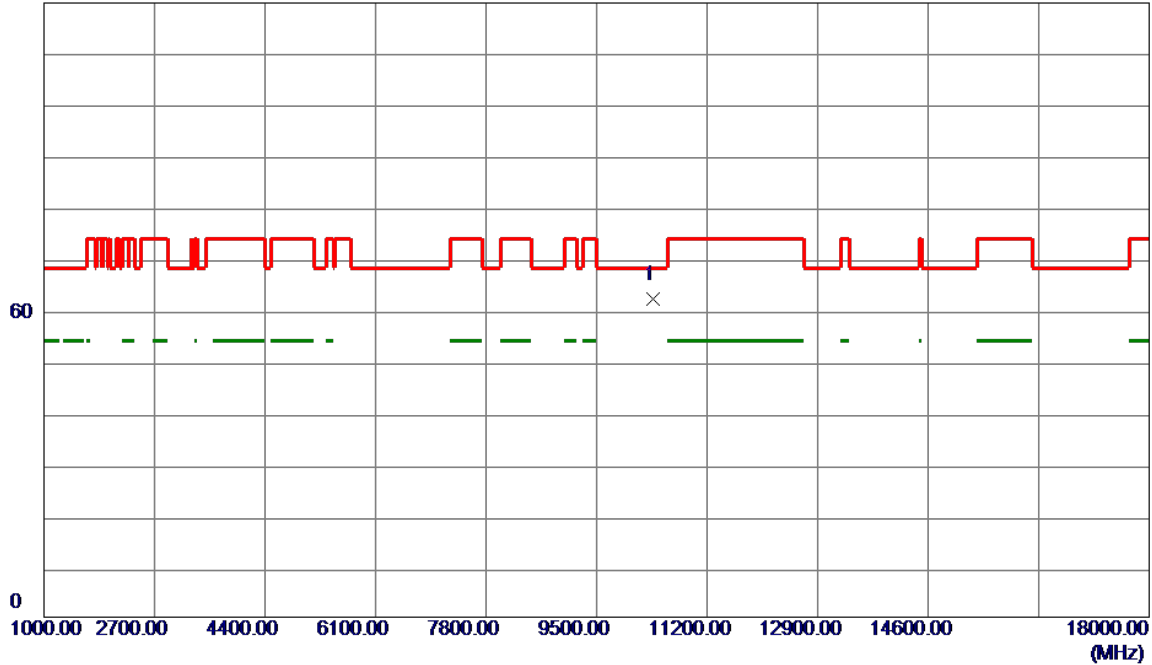


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	54.46	7.65	62.11	68.20	-6.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

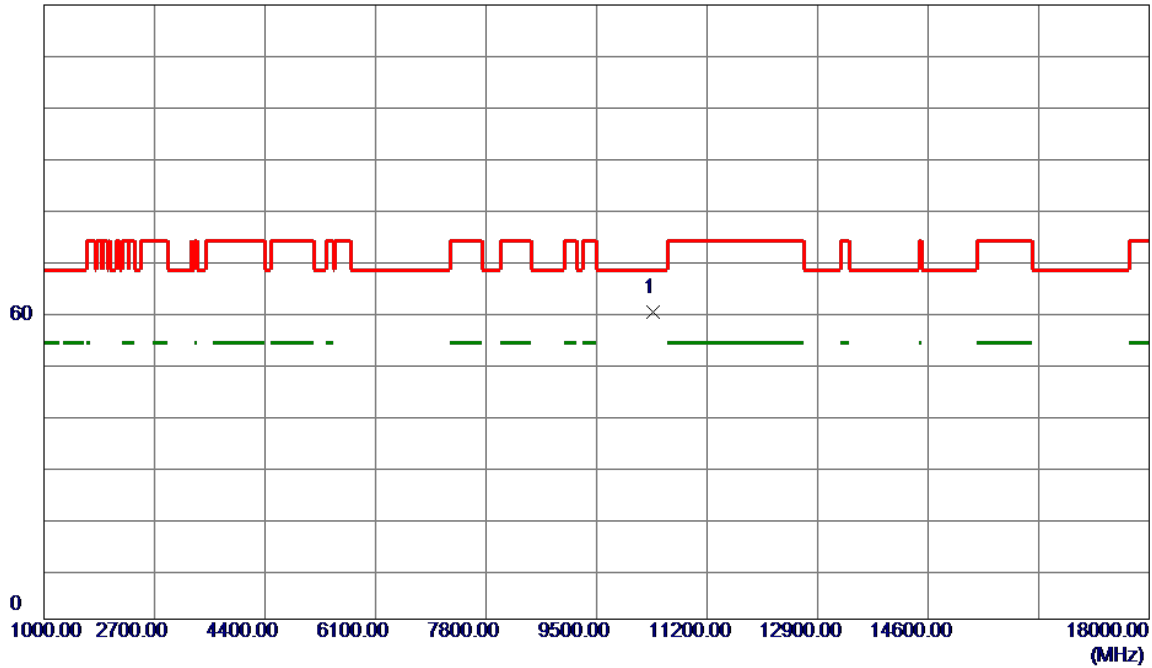


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	52.31	7.65	59.96	68.20	-8.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

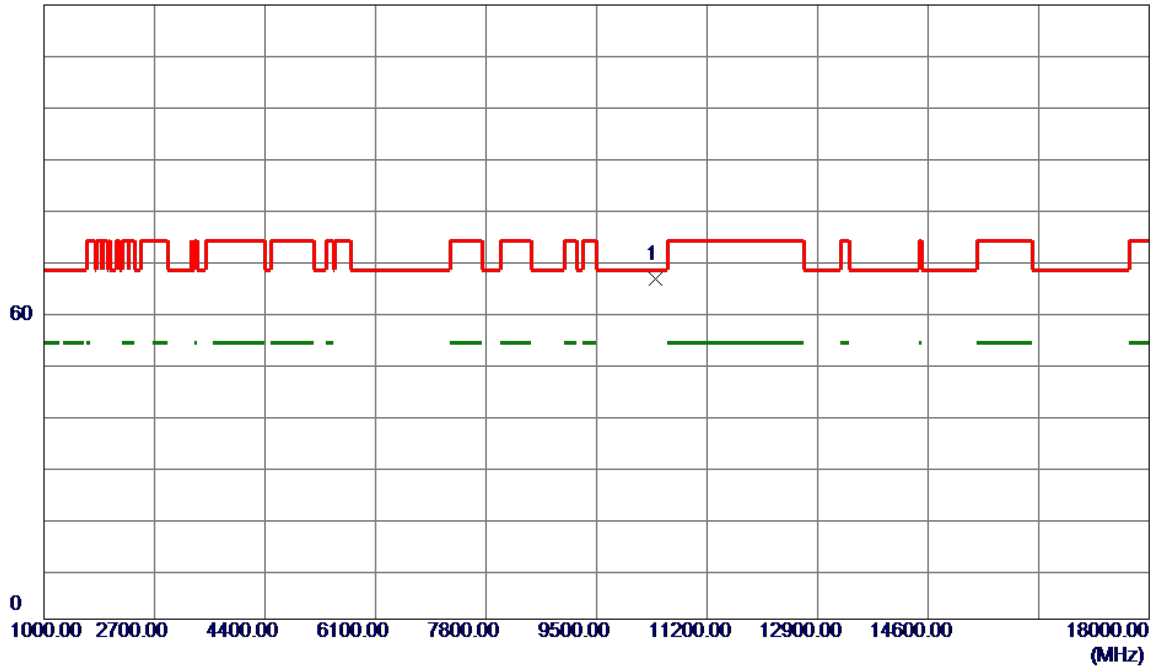


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	58.72	7.67	66.39	68.20	-1.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

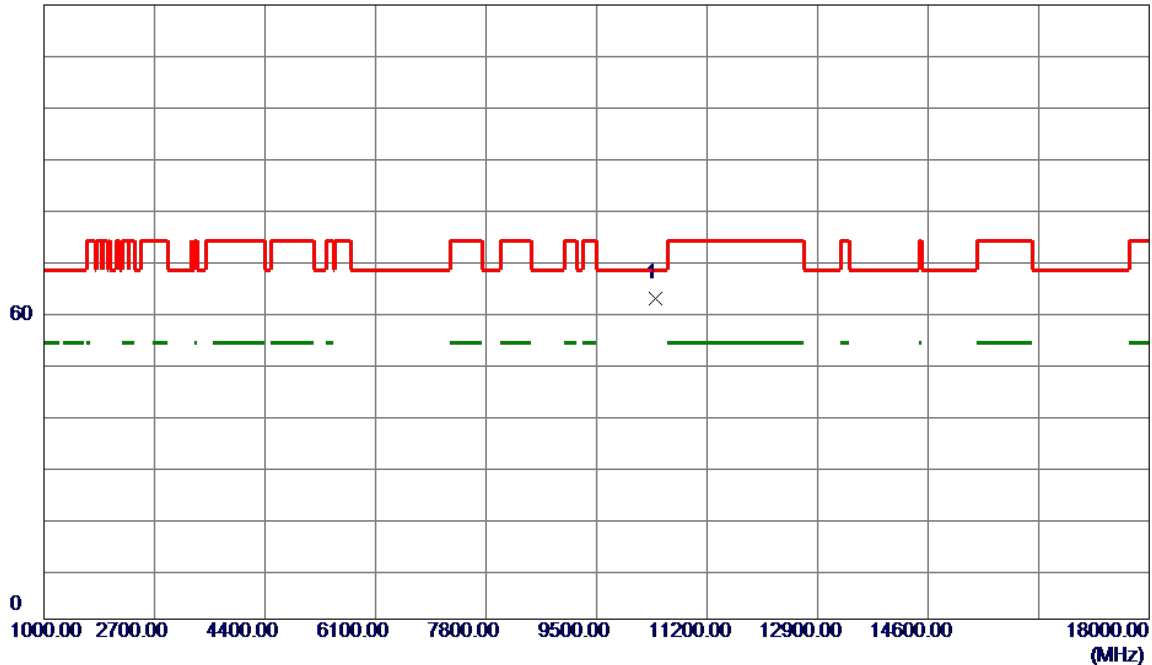


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	55.09	7.67	62.76	68.20	-5.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

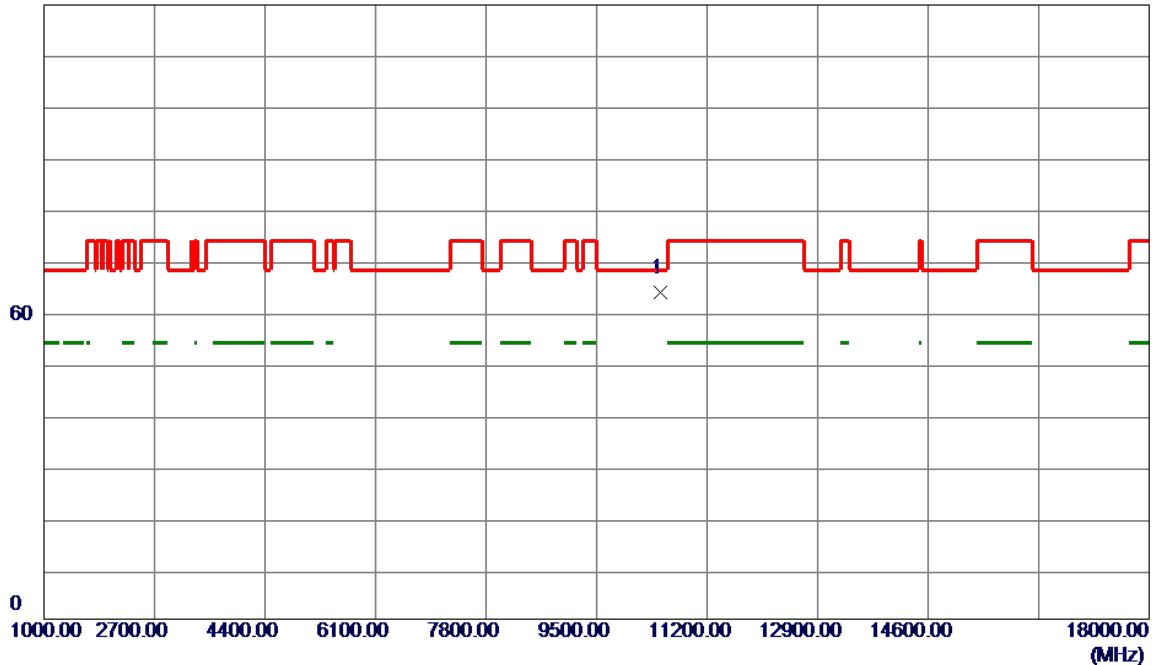


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	56.24	7.70	63.94	68.20	-4.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

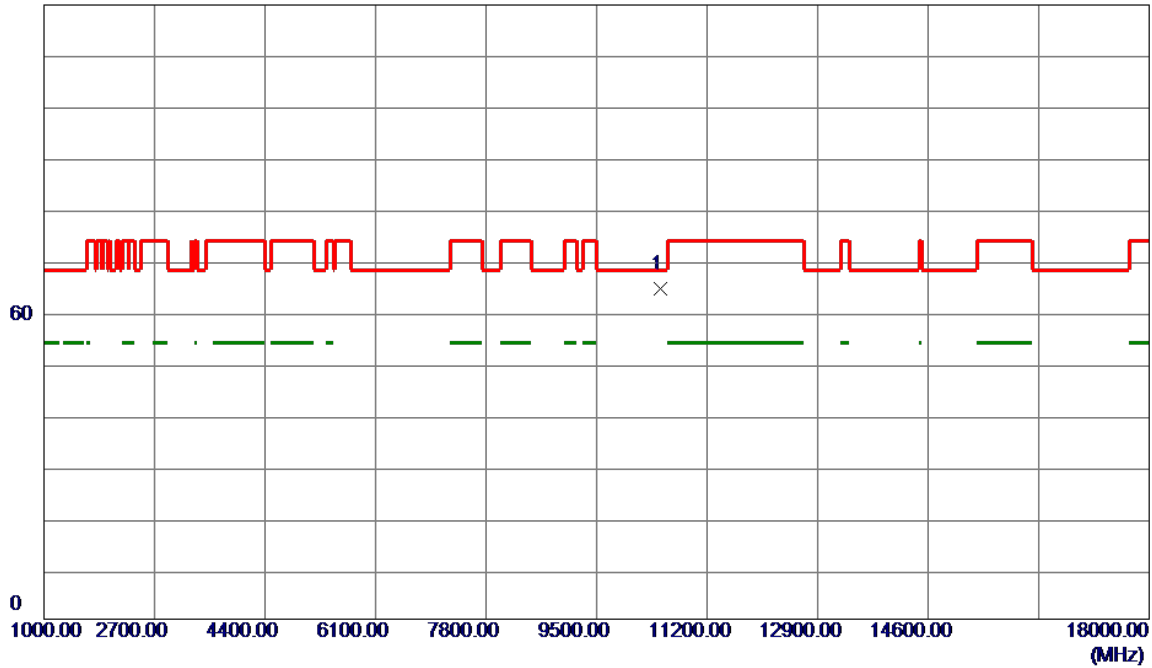


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10480.0000	56.81	7.70	64.51	68.20	-3.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

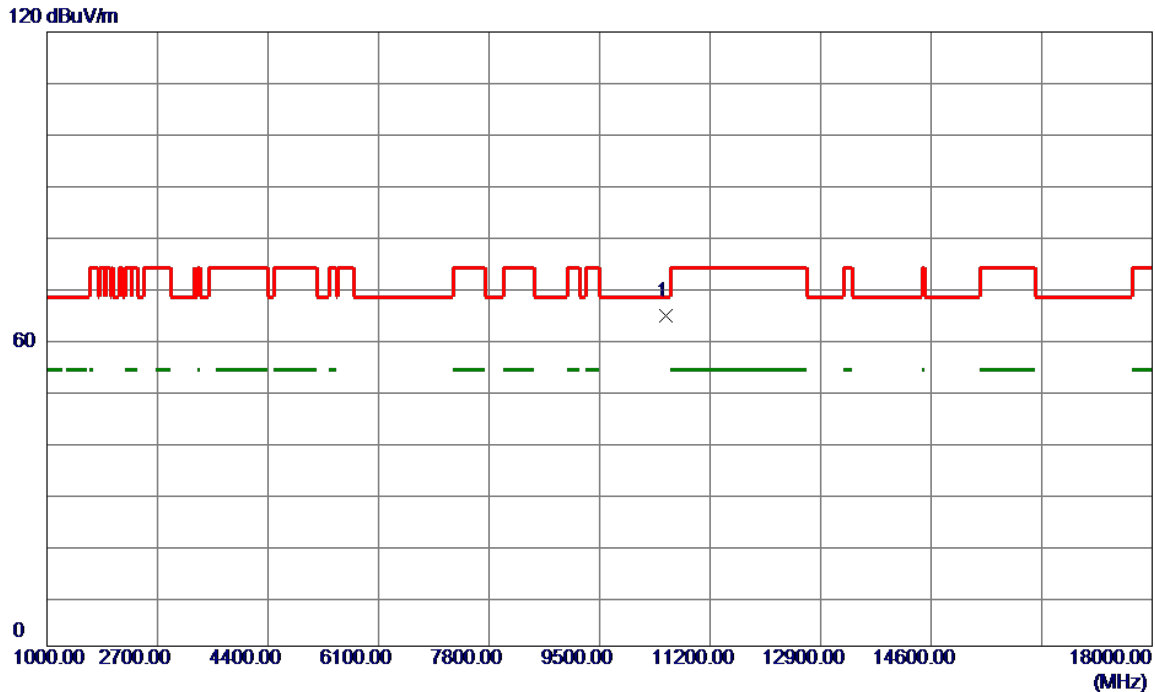


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	56.73	7.72	64.45	68.20	-3.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

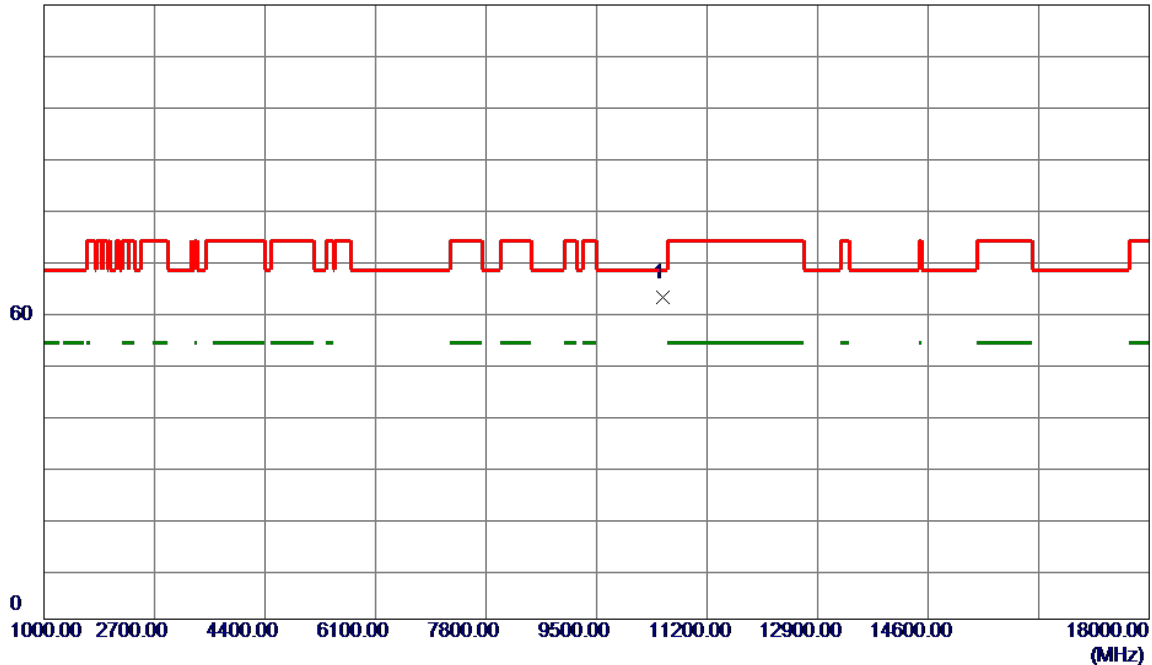


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	55.05	7.72	62.77	68.20	-5.43	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

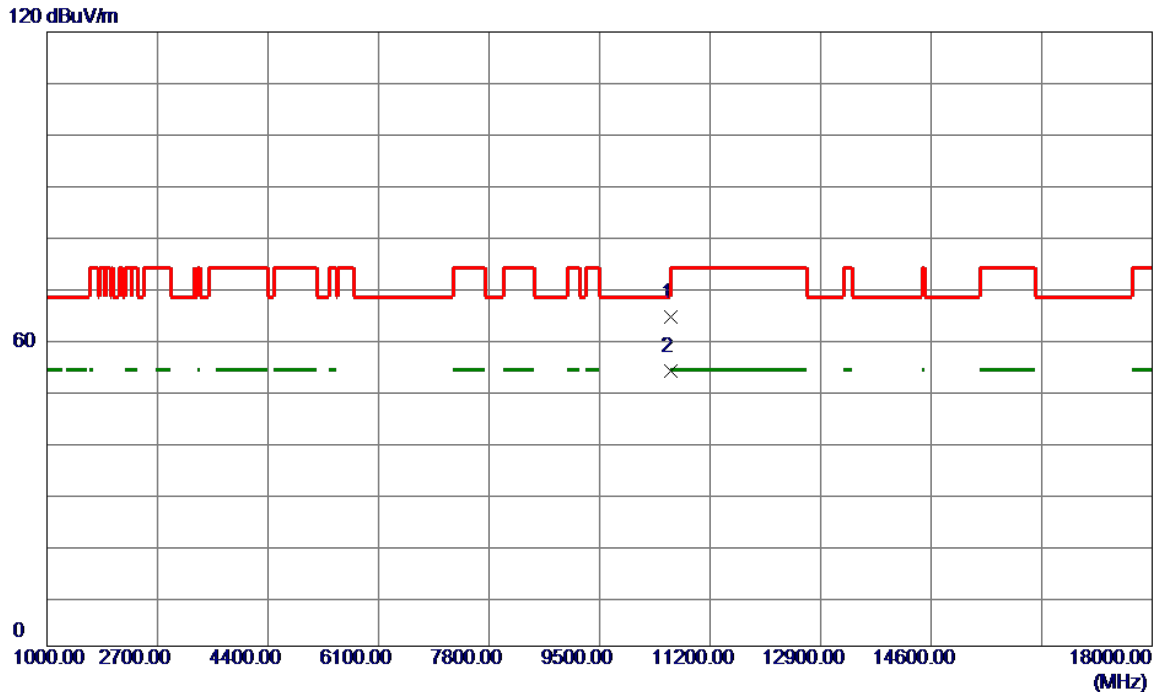


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	56.61	7.78	64.39	68.20	-3.81	Peak	
2	10600.0000	45.99	7.78	53.77	999.00	-945.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5300MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

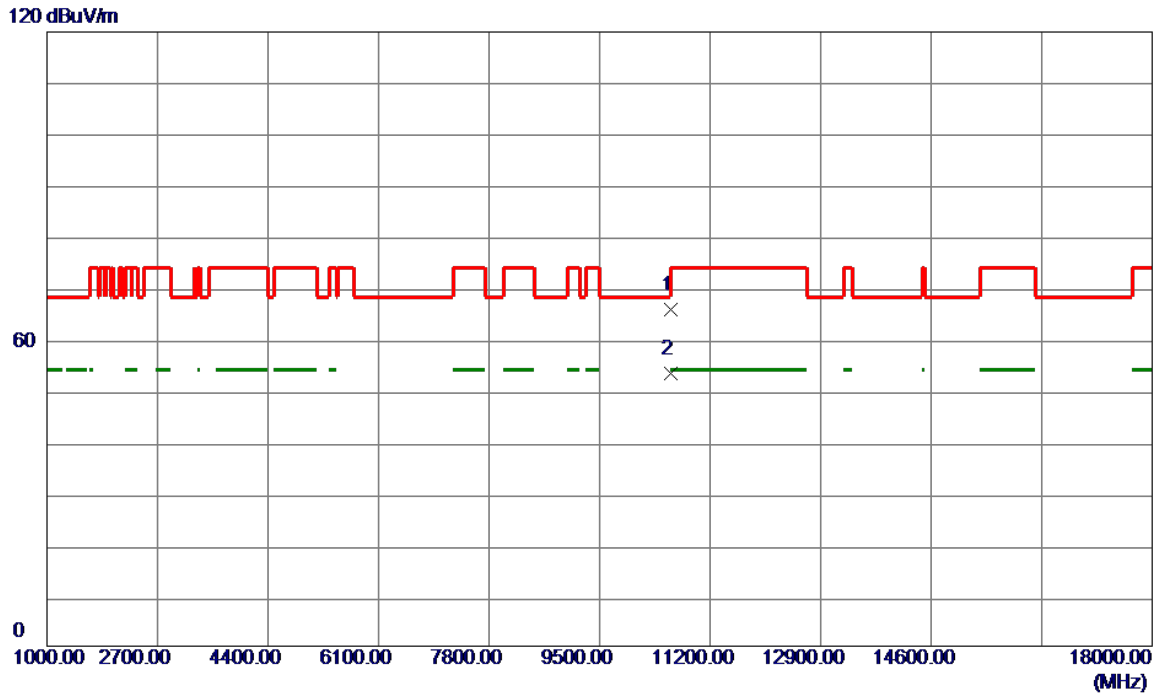


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	57.99	7.78	65.77	68.20	-2.43	Peak	
2	10600.0000	45.49	7.78	53.27	999.00	-945.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

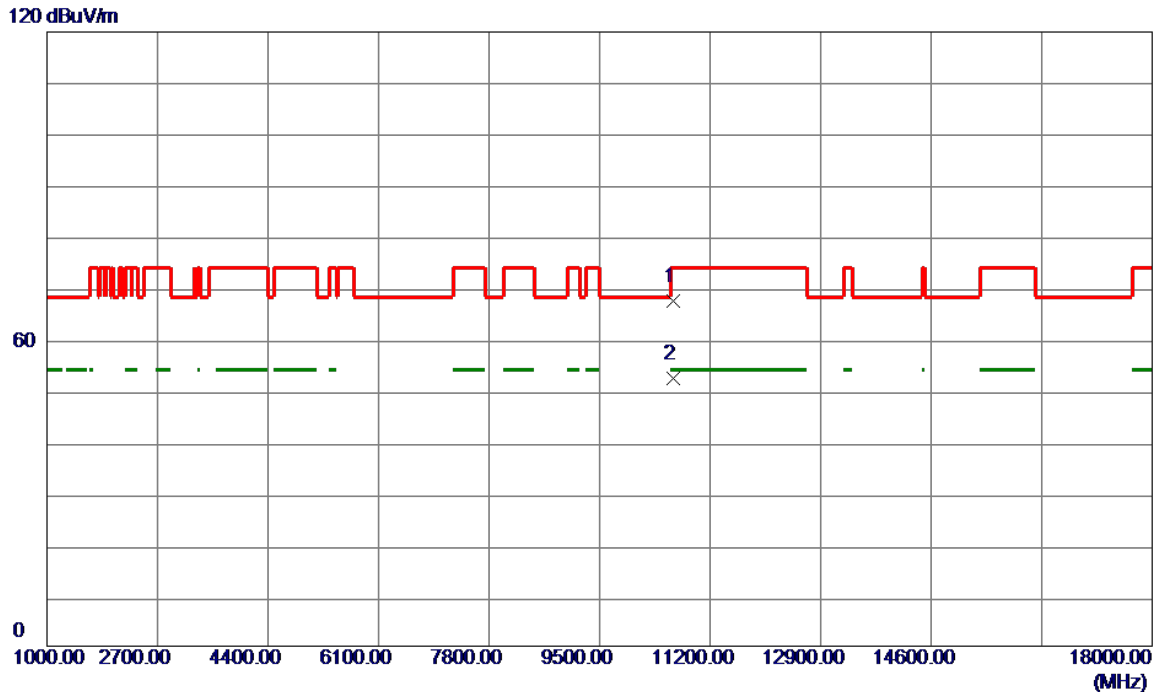


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	59.59	7.81	67.40	74.00	-6.60	Peak	
2 *	10640.0000	44.57	7.81	52.38	54.00	-1.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

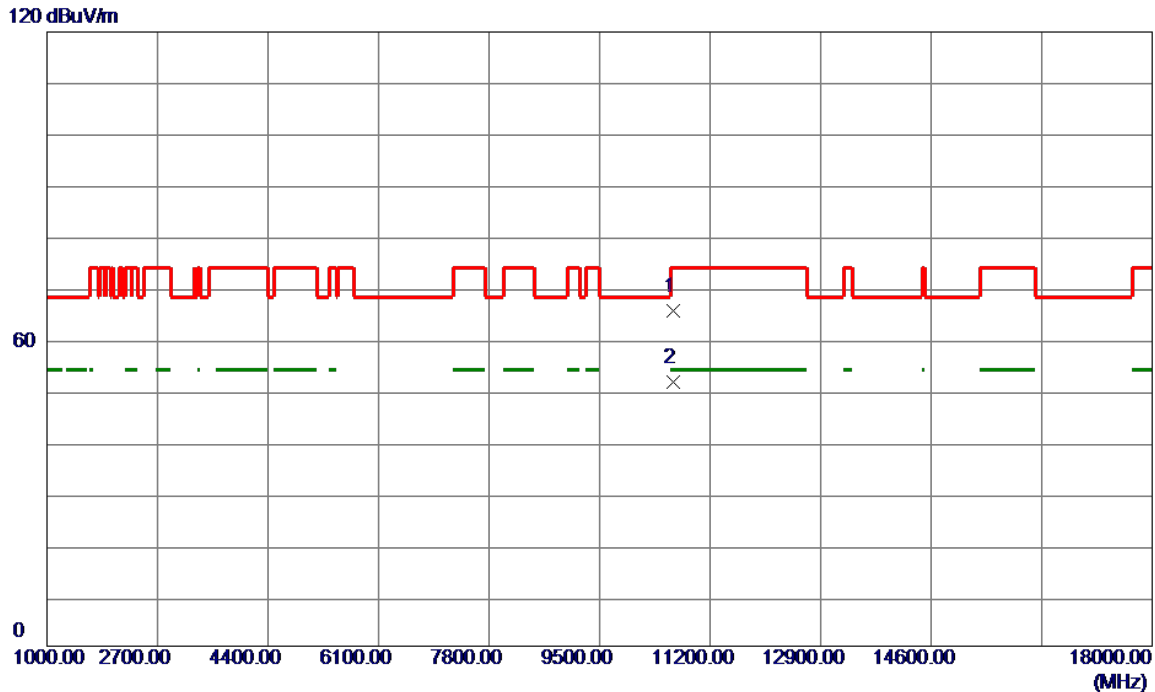


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	57.72	7.81	65.53	74.00	-8.47	Peak	
2 *	10640.0000	43.85	7.81	51.66	54.00	-2.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

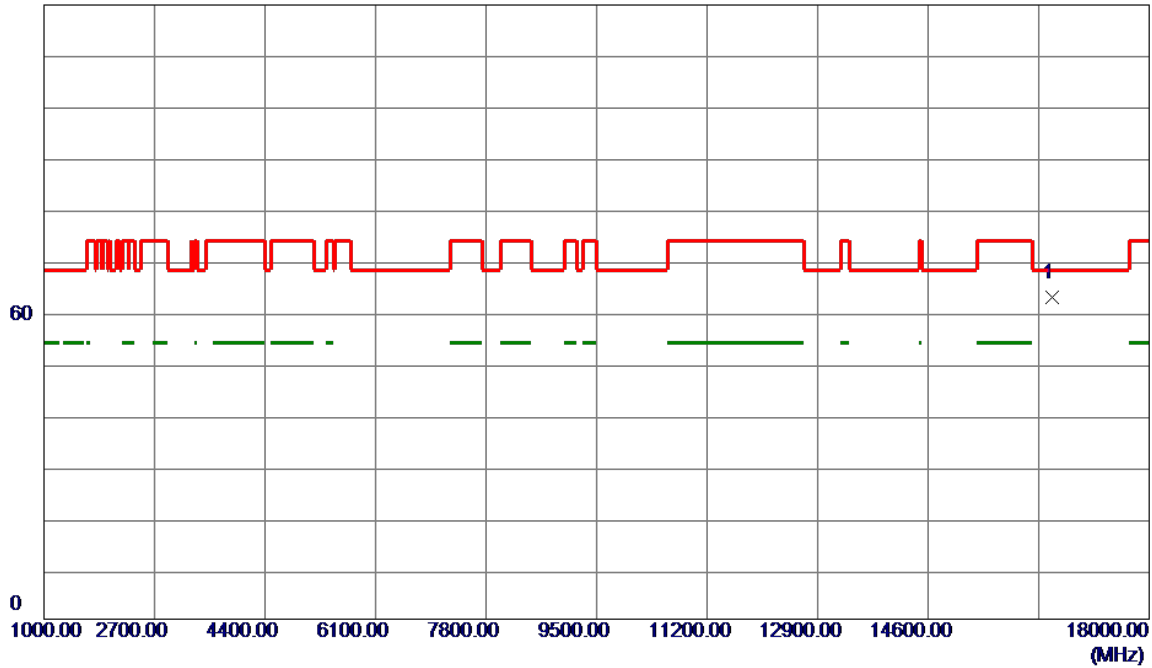


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16500.0000	54.98	7.98	62.96	68.20	-5.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

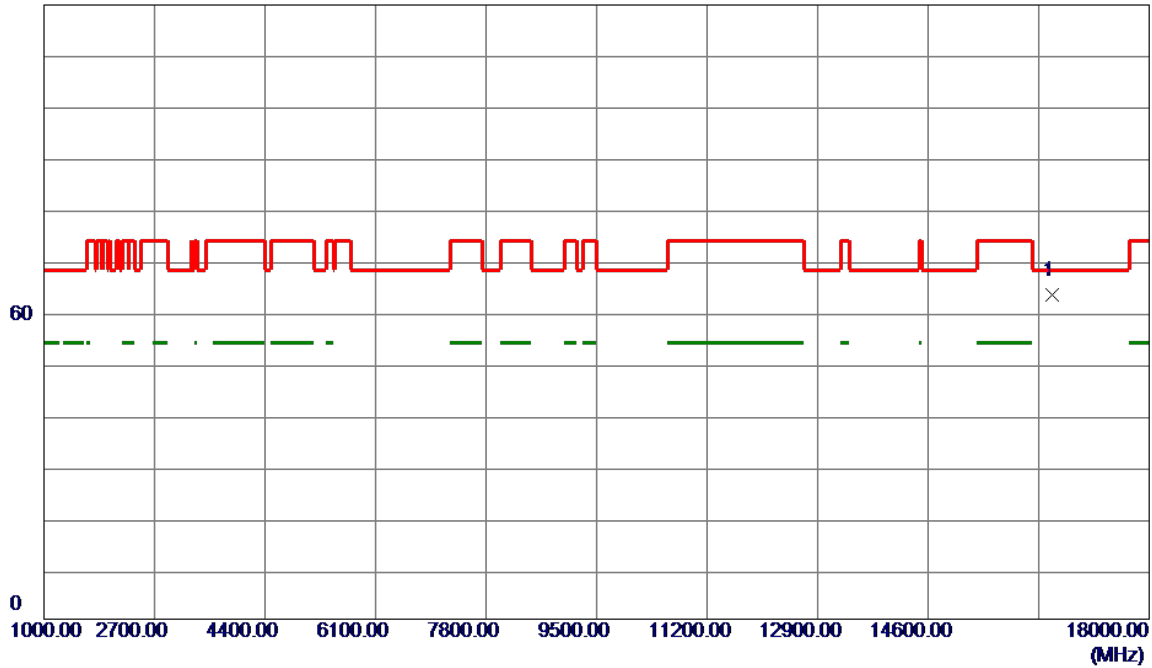


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16500.0000	55.38	7.98	63.36	68.20	-4.84	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

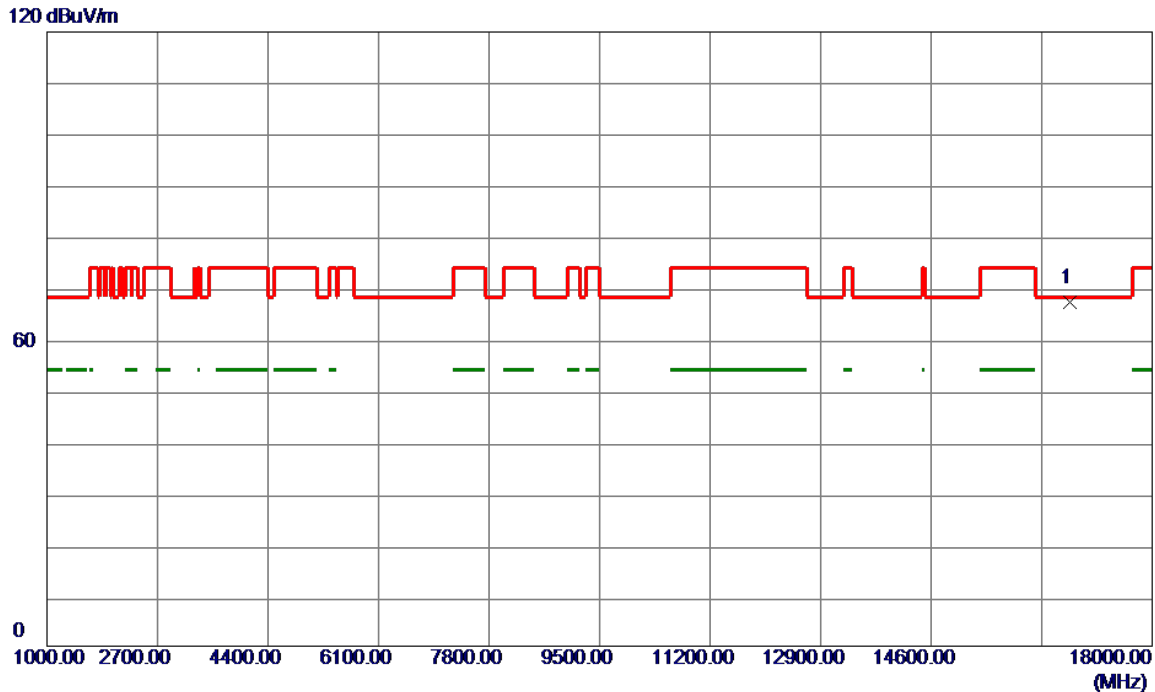


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16742.0000	59.40	7.82	67.22	68.20	-0.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5580MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

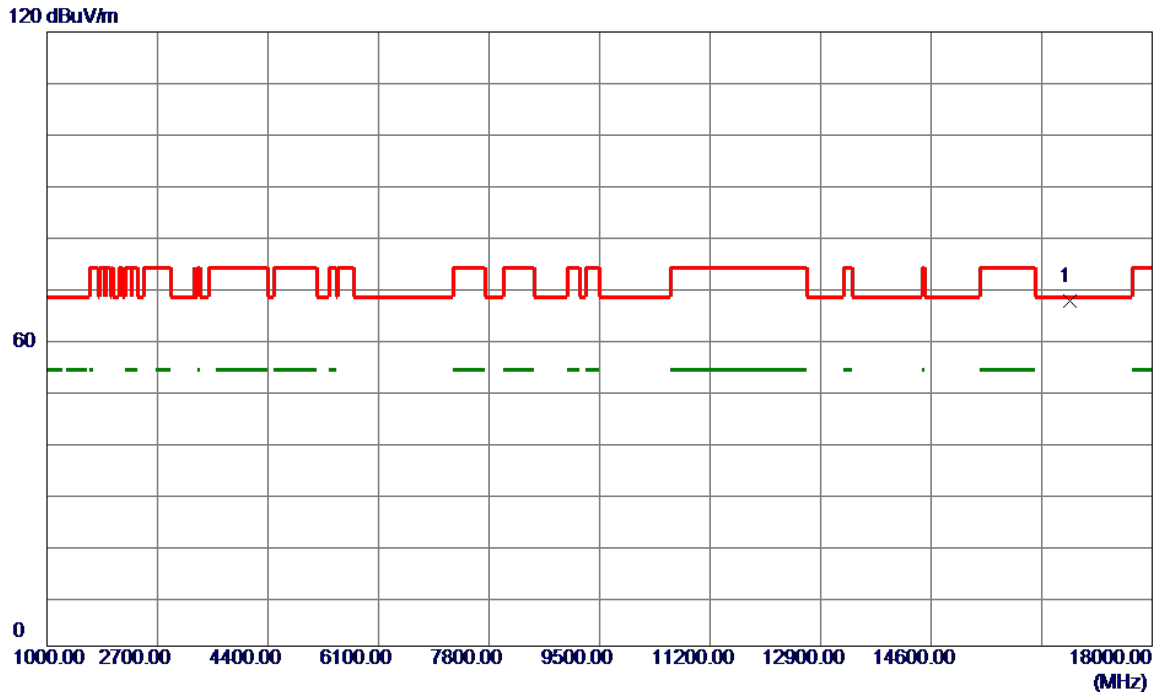


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16725.0000	59.67	7.83	67.50	68.20	-0.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

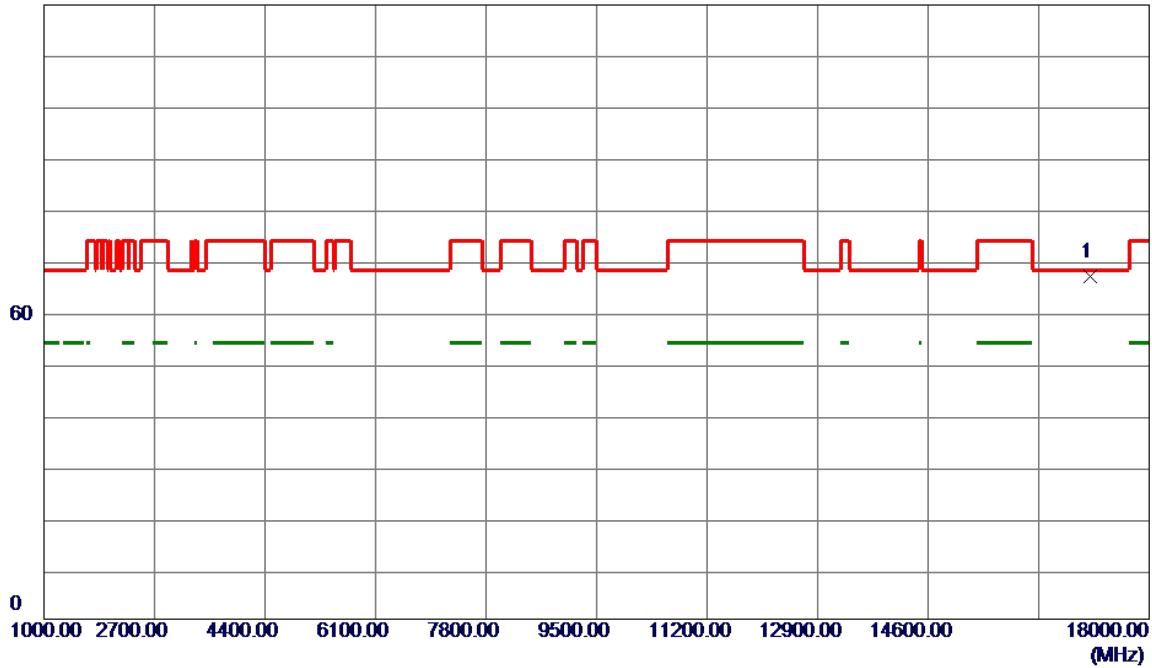


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17099.0000	59.18	7.69	66.87	68.20	-1.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

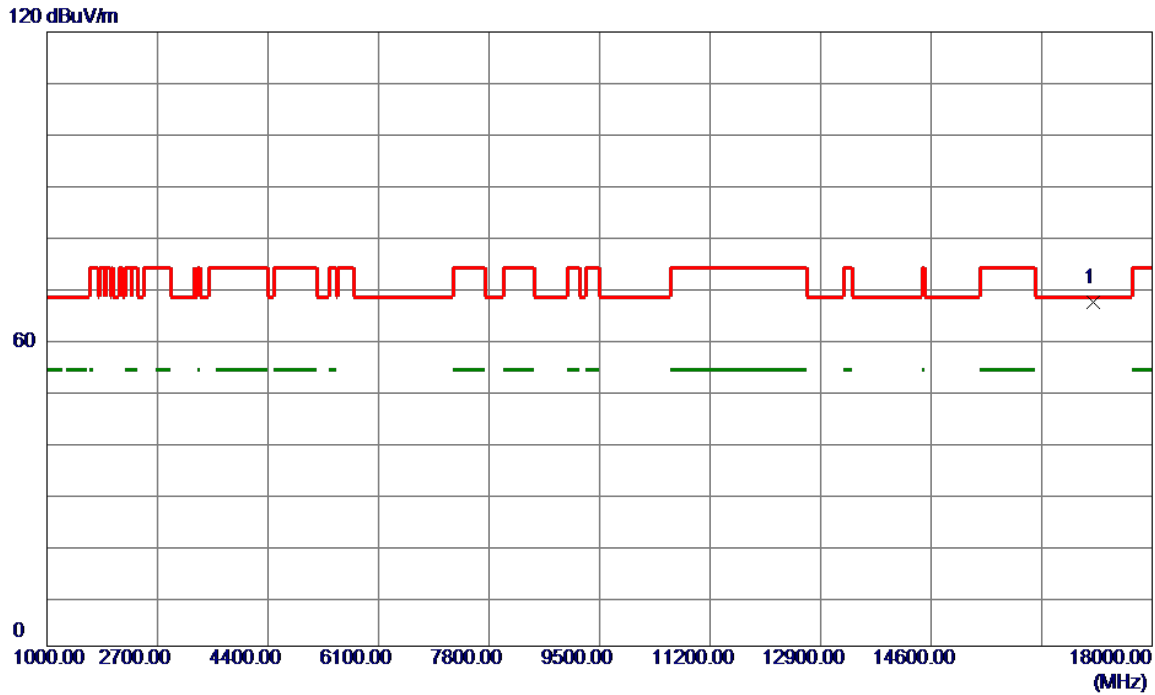


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17099.0000	59.56	7.69	67.25	68.20	-0.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

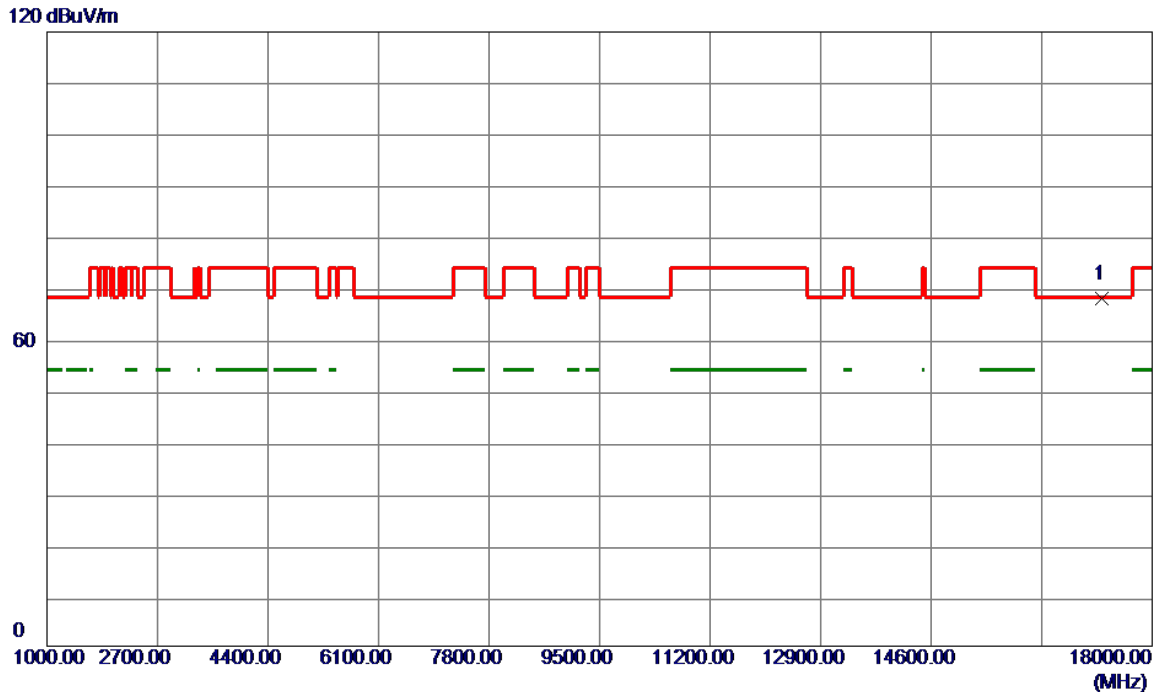


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17235.0000	60.20	7.75	67.95	68.20	-0.25	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

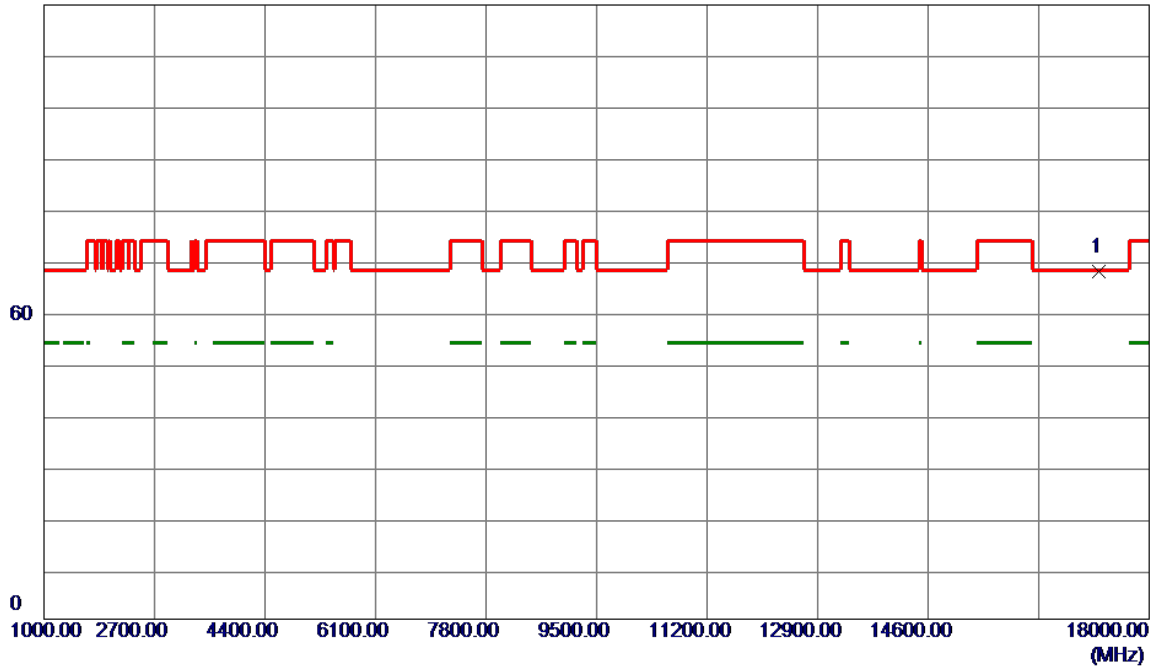


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17235.0000	60.14	7.75	67.89	68.20	-0.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

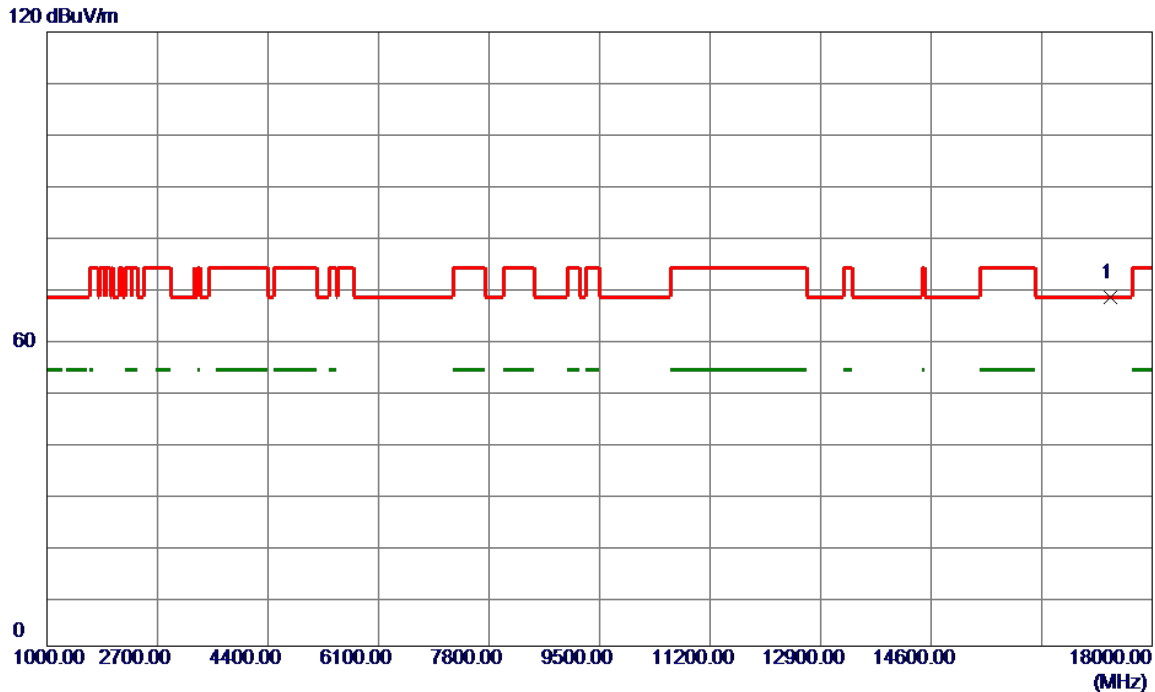


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17354.0000	60.33	7.80	68.13	68.20	-0.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

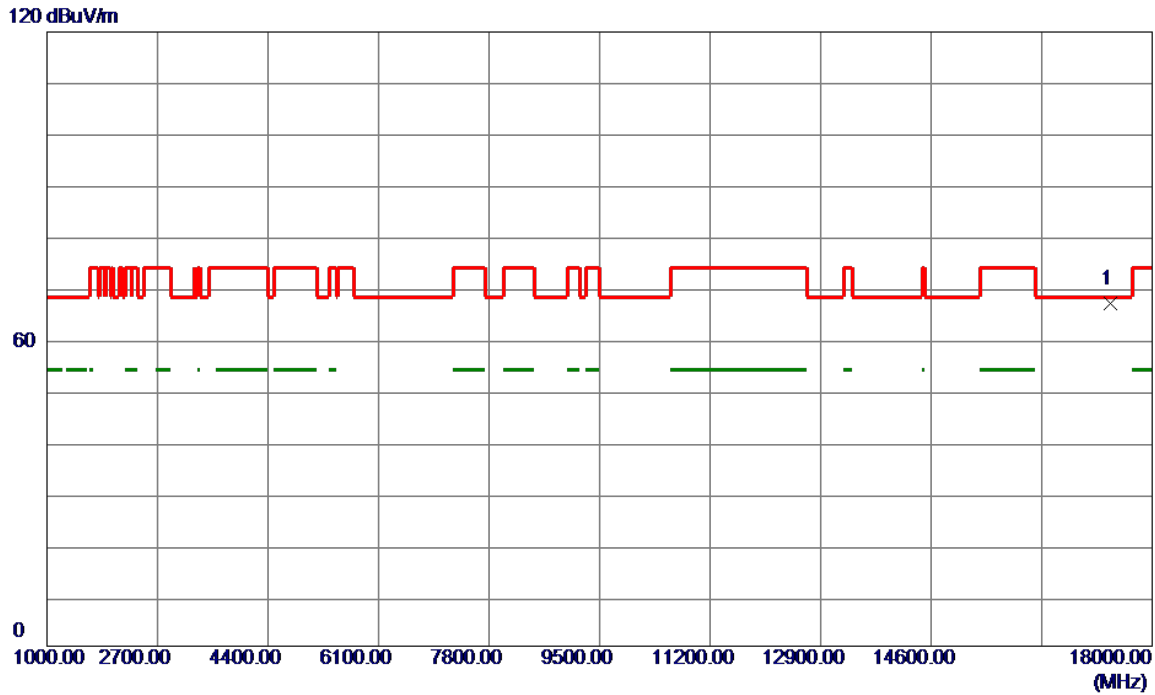


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17354.0000	59.23	7.80	67.03	68.20	-1.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

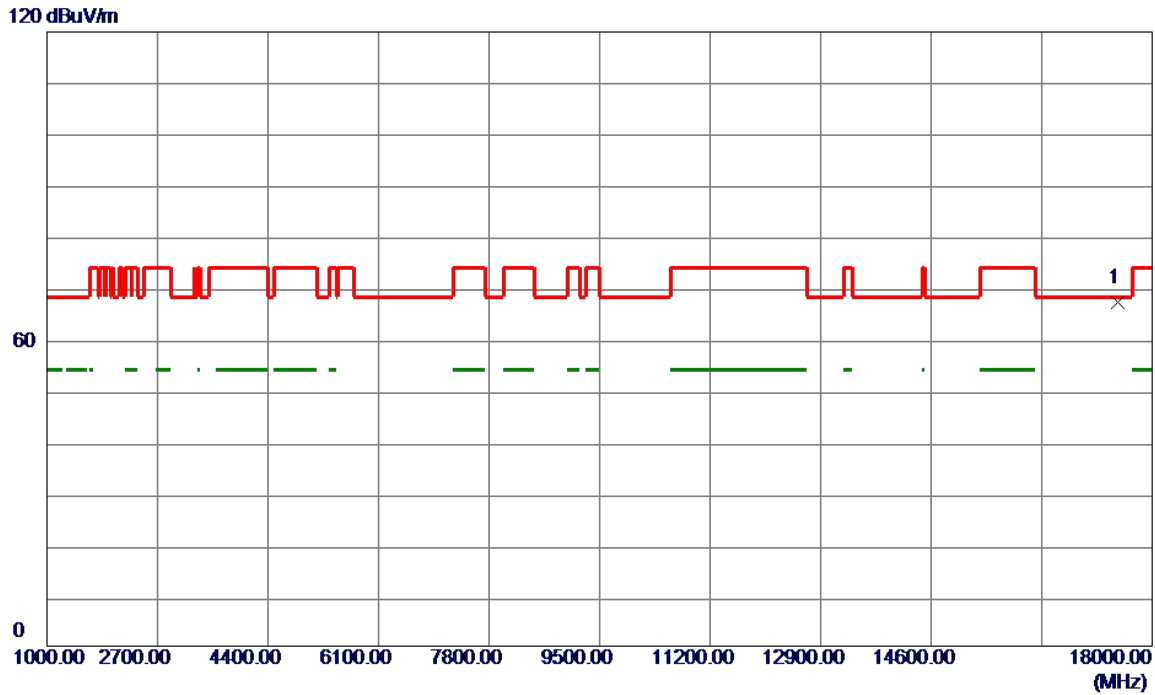


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17473.0000	59.28	7.86	67.14	68.20	-1.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/5/29
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

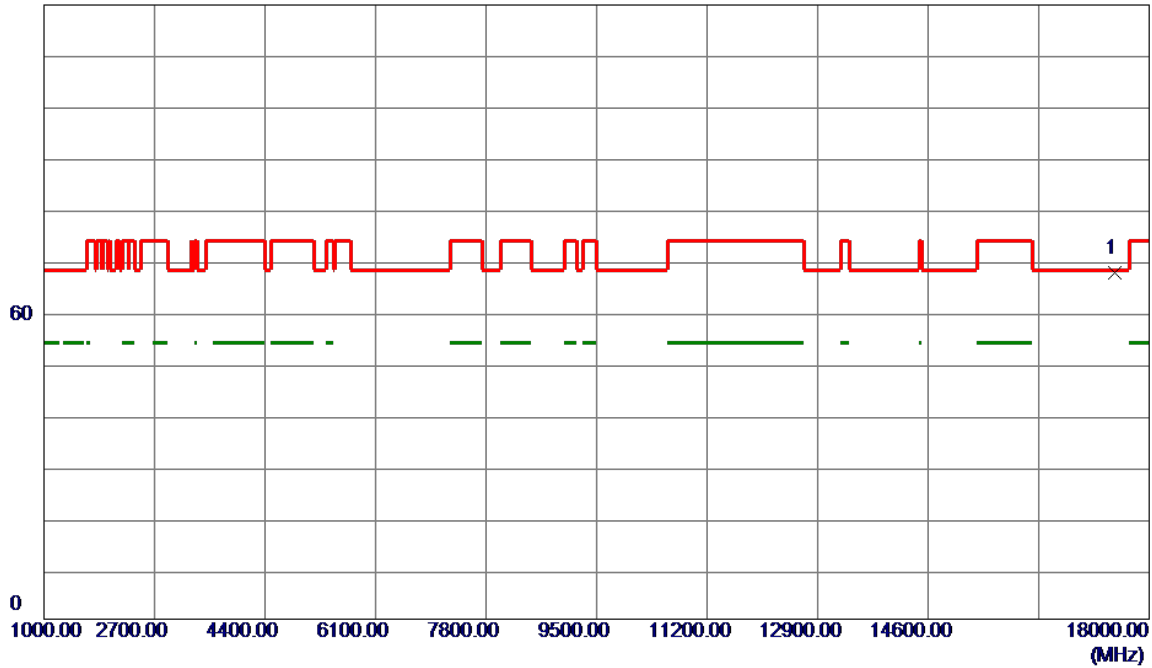


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17473.0000	59.72	7.86	67.58	68.20	-0.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

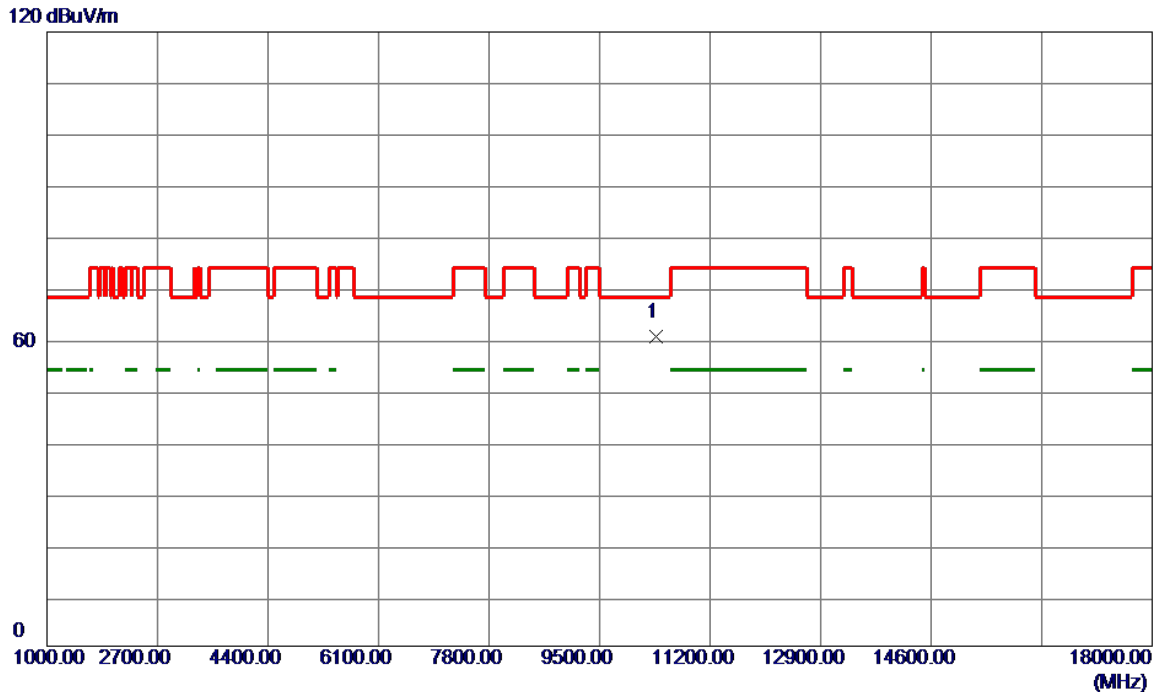


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10367.0000	52.75	7.66	60.41	68.20	-7.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

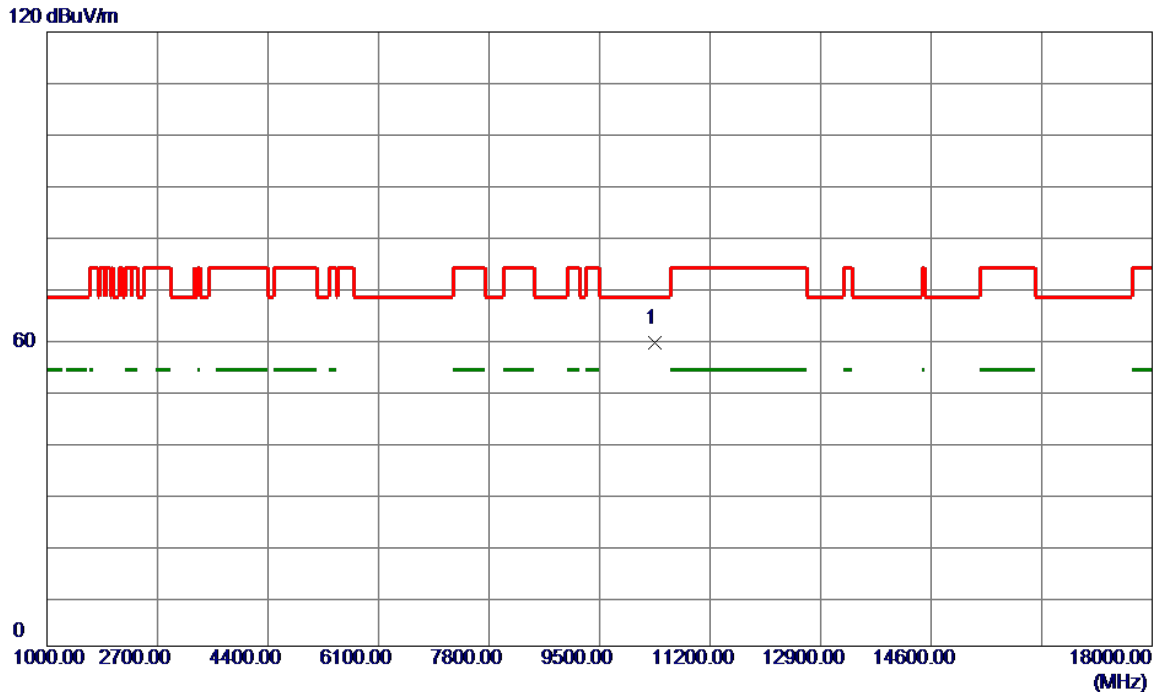


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10350.0000	51.59	7.65	59.24	68.20	-8.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

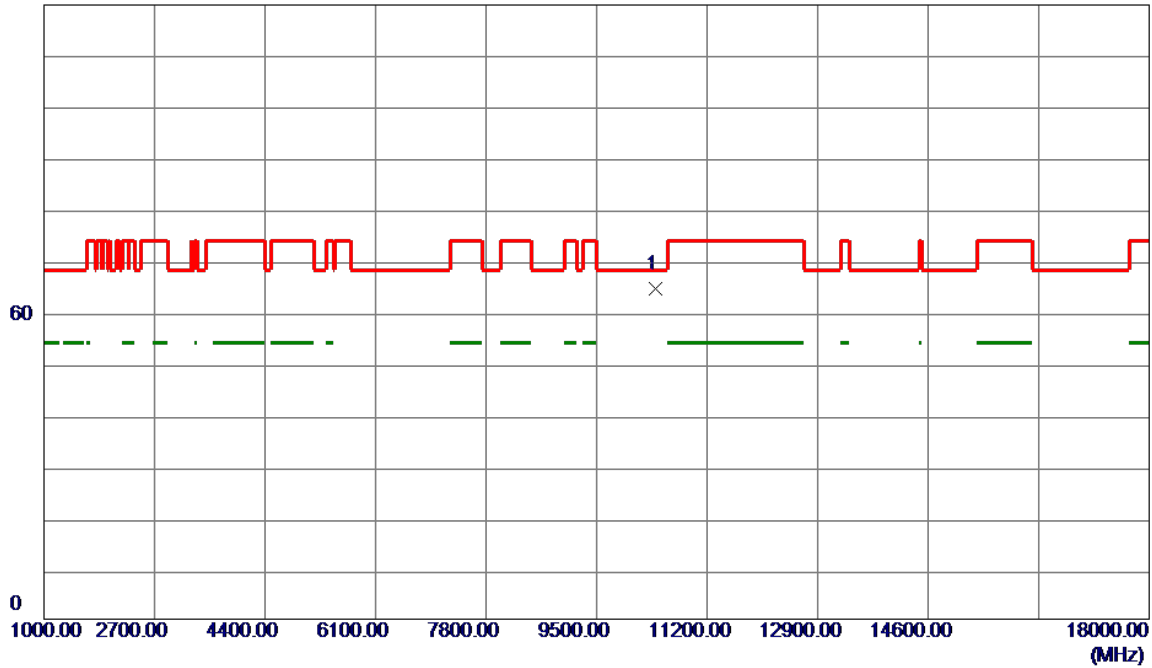


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10401.0000	56.88	7.67	64.55	68.20	-3.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

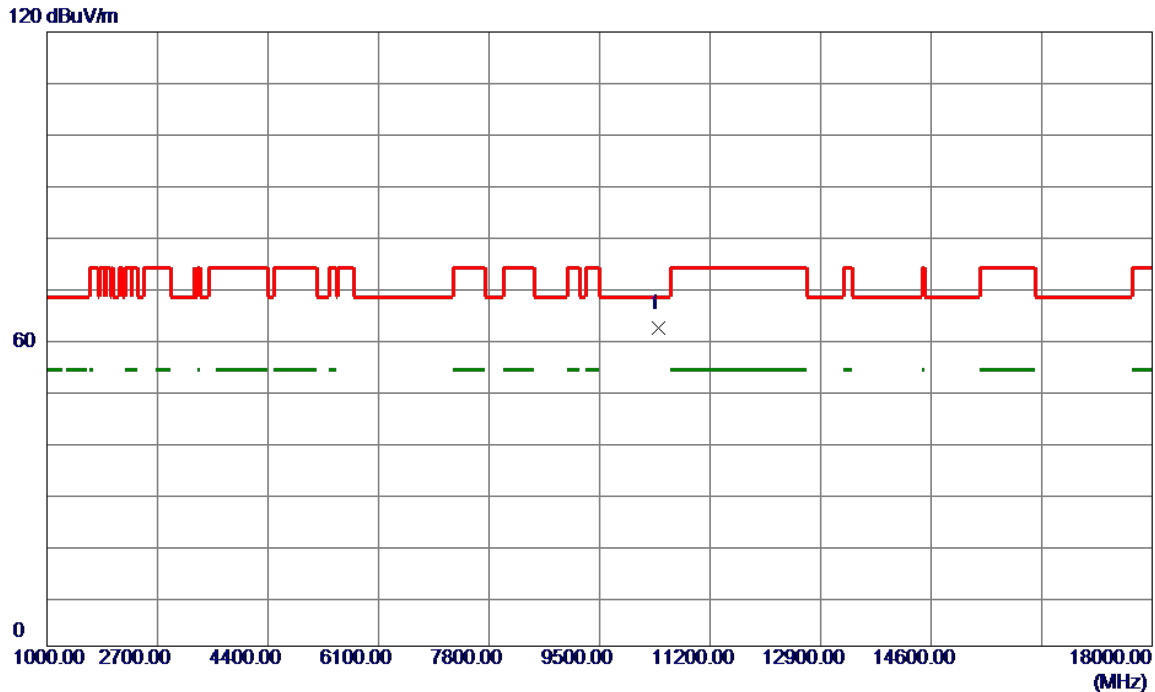


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10401.0000	54.60	7.67	62.27	68.20	-5.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

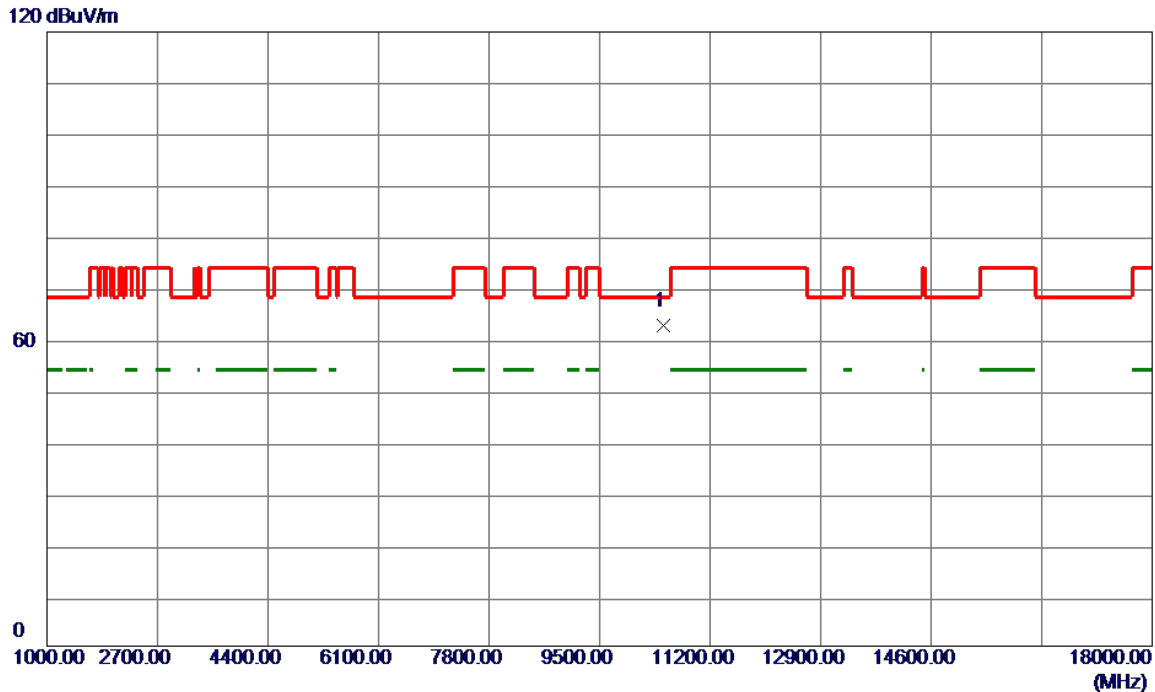


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10486.0000	54.92	7.70	62.62	68.20	-5.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

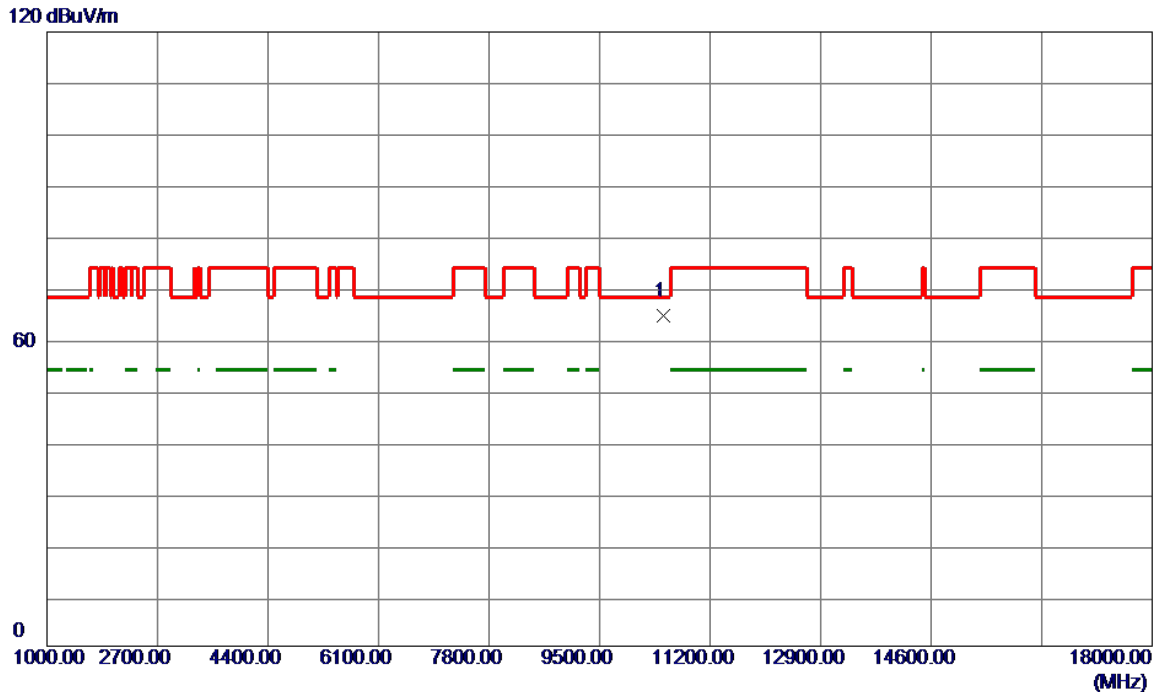


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10486.0000	56.93	7.70	64.63	68.20	-3.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

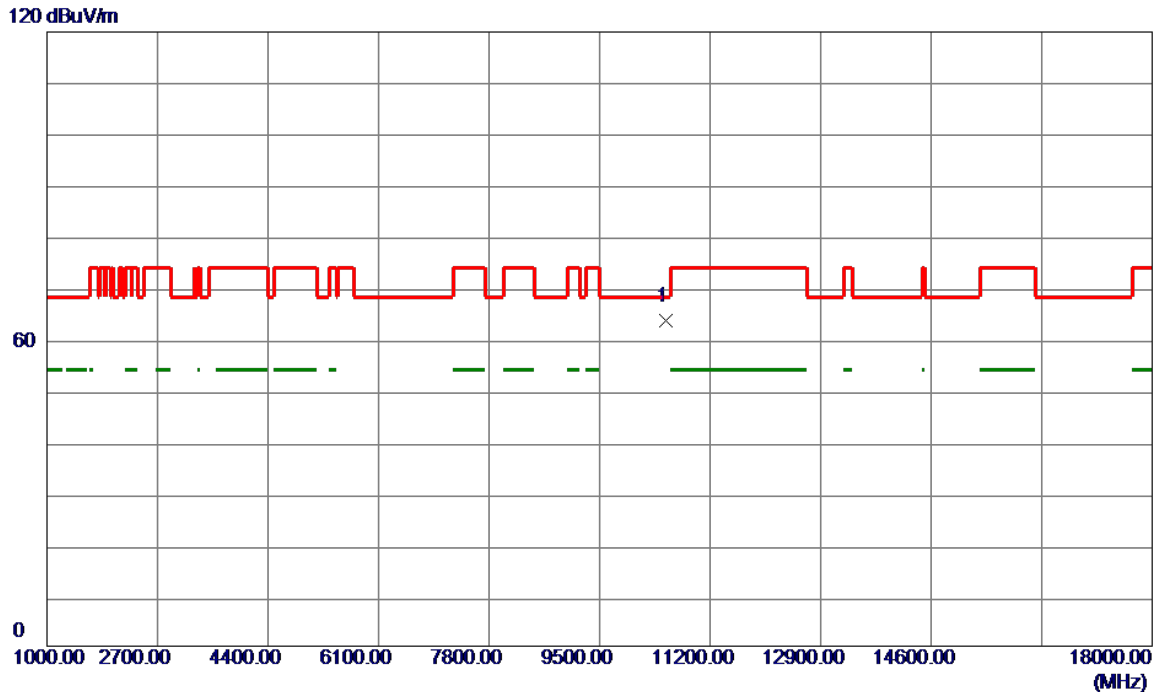


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	55.98	7.72	63.70	68.20	-4.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

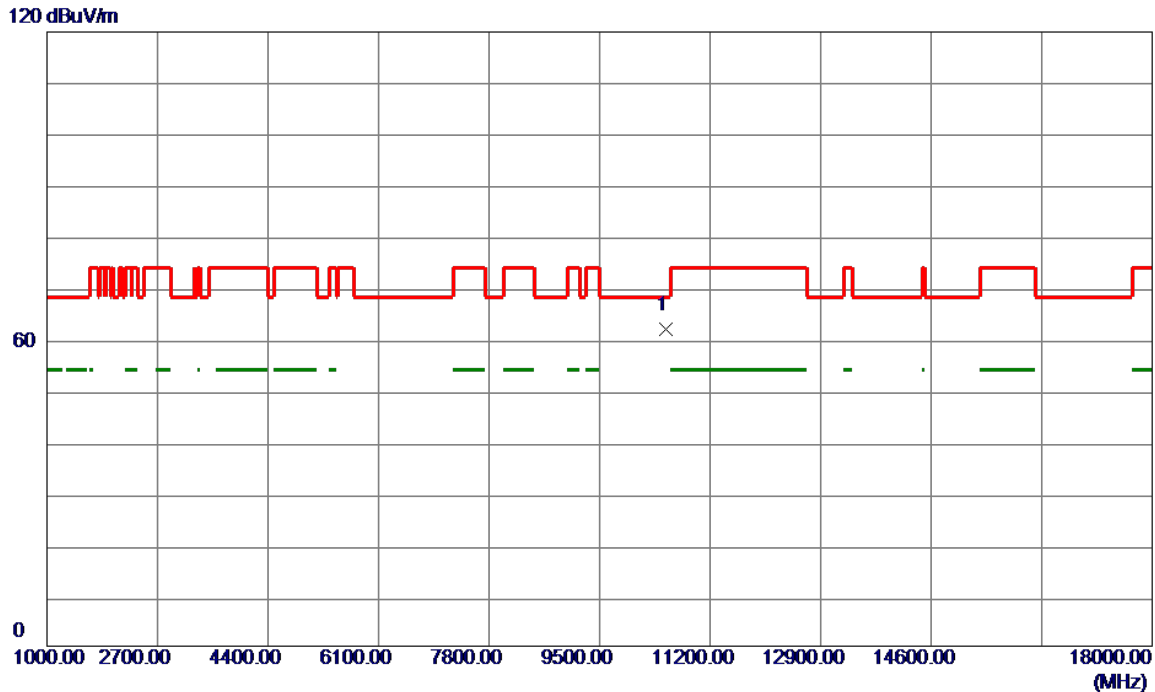


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10520.0000	54.10	7.72	61.82	68.20	-6.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

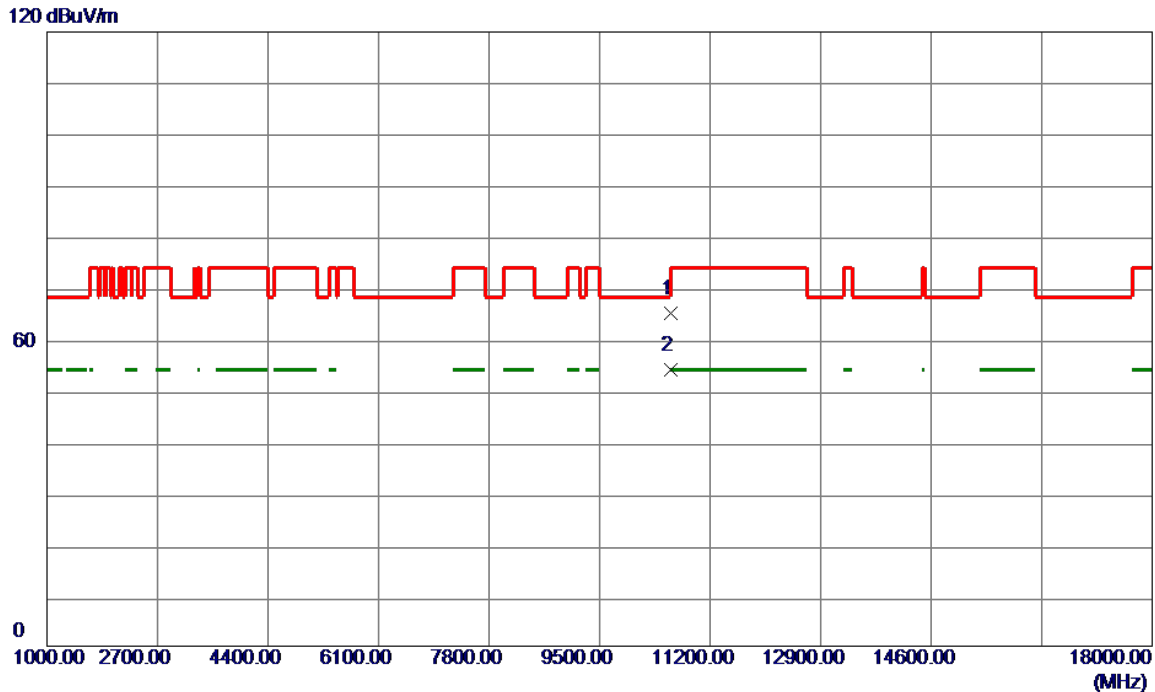


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	57.31	7.78	65.09	68.20	-3.11	Peak	
2	10600.0000	46.18	7.78	53.96	999.00	-945.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5300MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

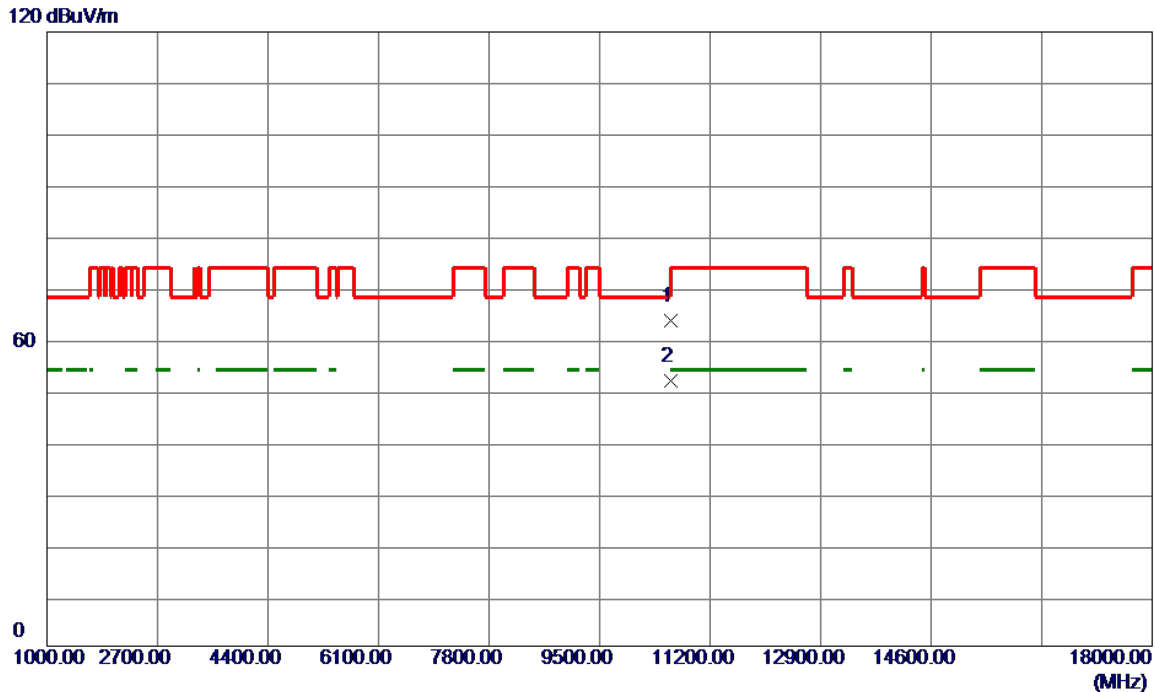


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	55.72	7.78	63.50	68.20	-4.70	Peak	
2	10600.0000	44.09	7.78	51.87	999.00	-947.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

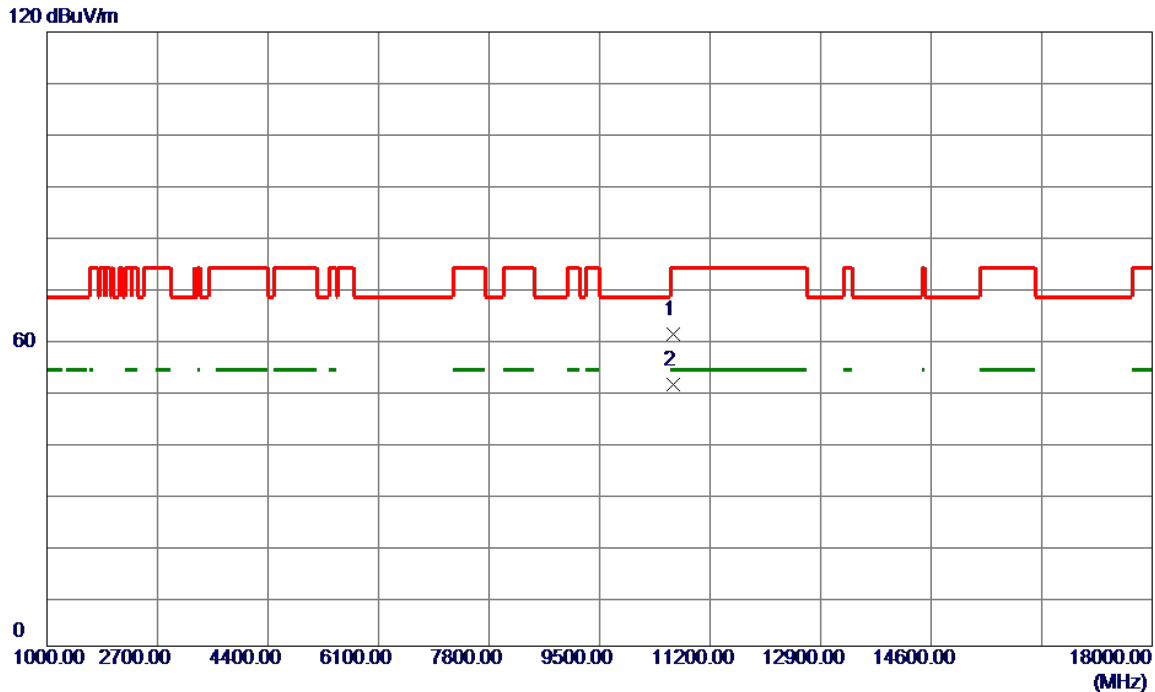


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	53.12	7.81	60.93	74.00	-13.07	Peak	
2 *	10640.0000	43.30	7.81	51.11	54.00	-2.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

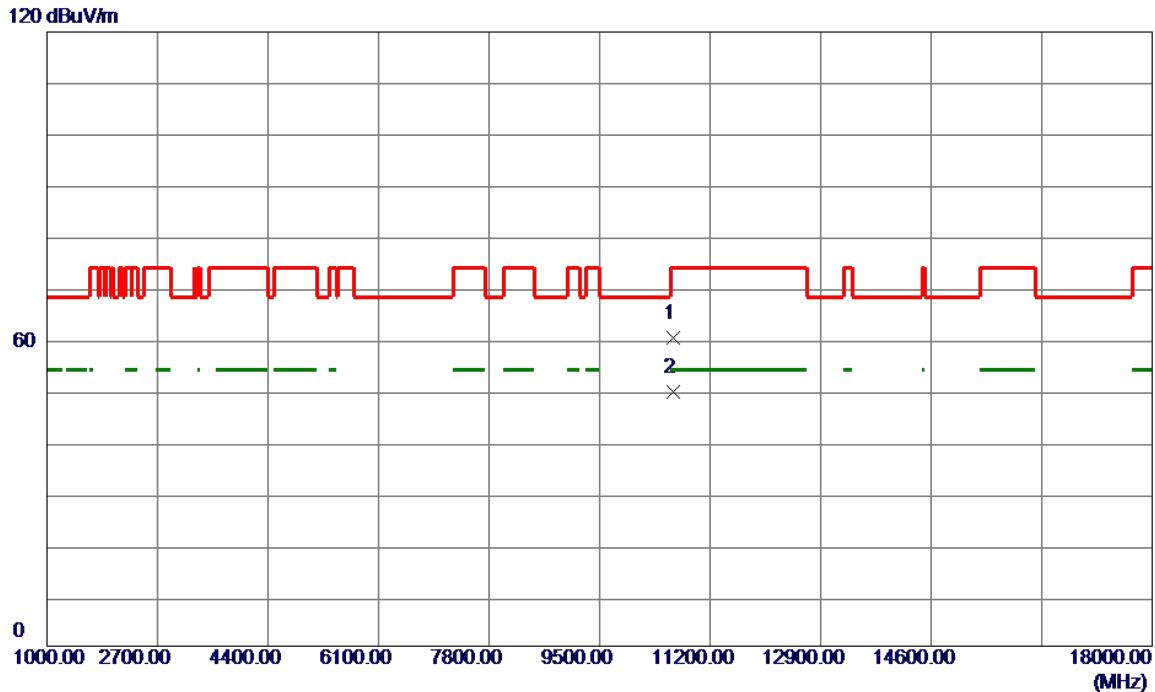


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	52.39	7.81	60.20	74.00	-13.80	Peak	
2 *	10640.0000	41.86	7.81	49.67	54.00	-4.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

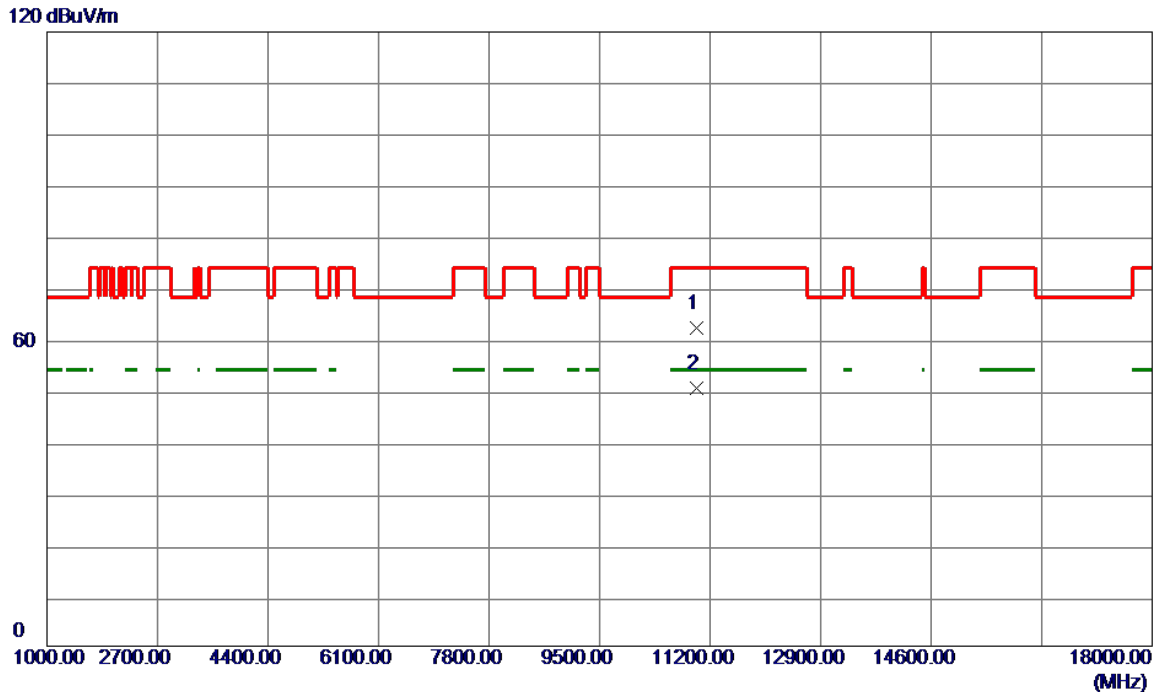


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	54.06	8.05	62.11	74.00	-11.89	Peak	
2 *	11000.0000	42.36	8.05	50.41	54.00	-3.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

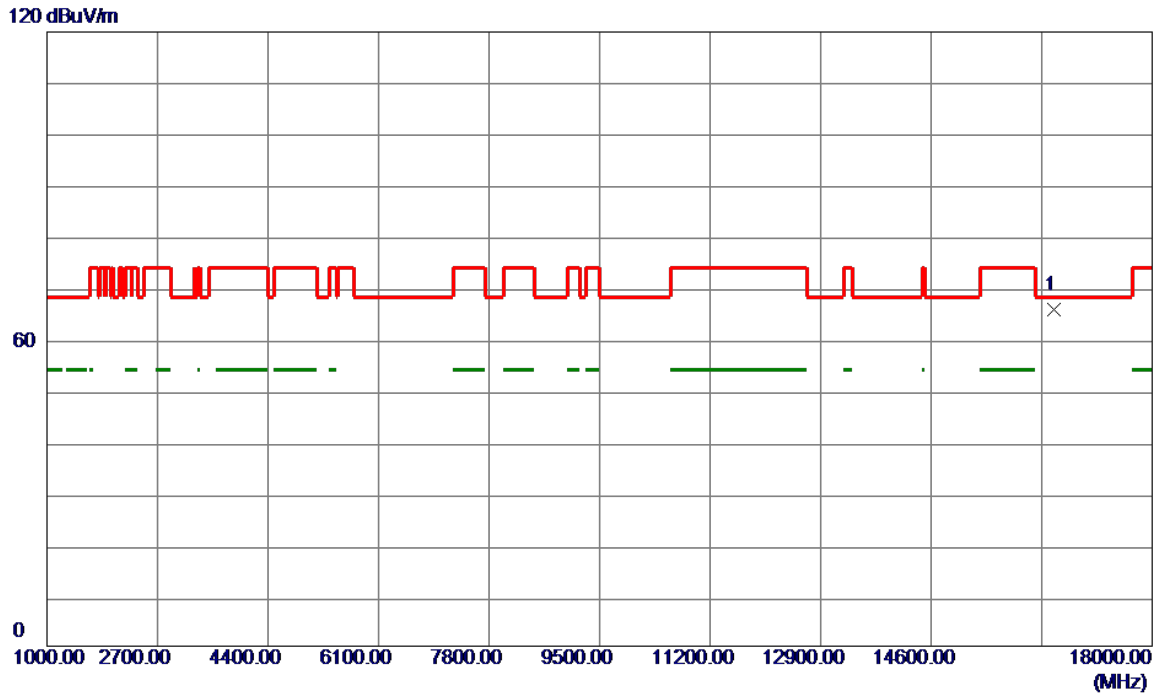


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16487.0000	57.68	7.99	65.67	68.20	-2.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

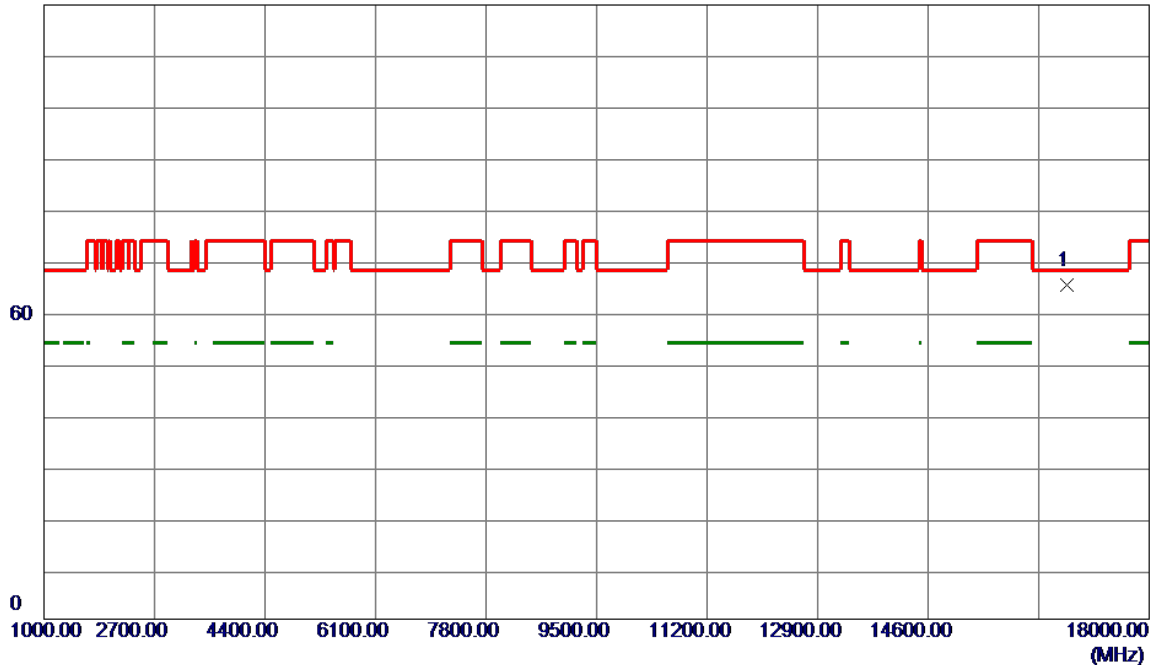


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16742.0000	57.46	7.82	65.28	68.20	-2.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5580MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

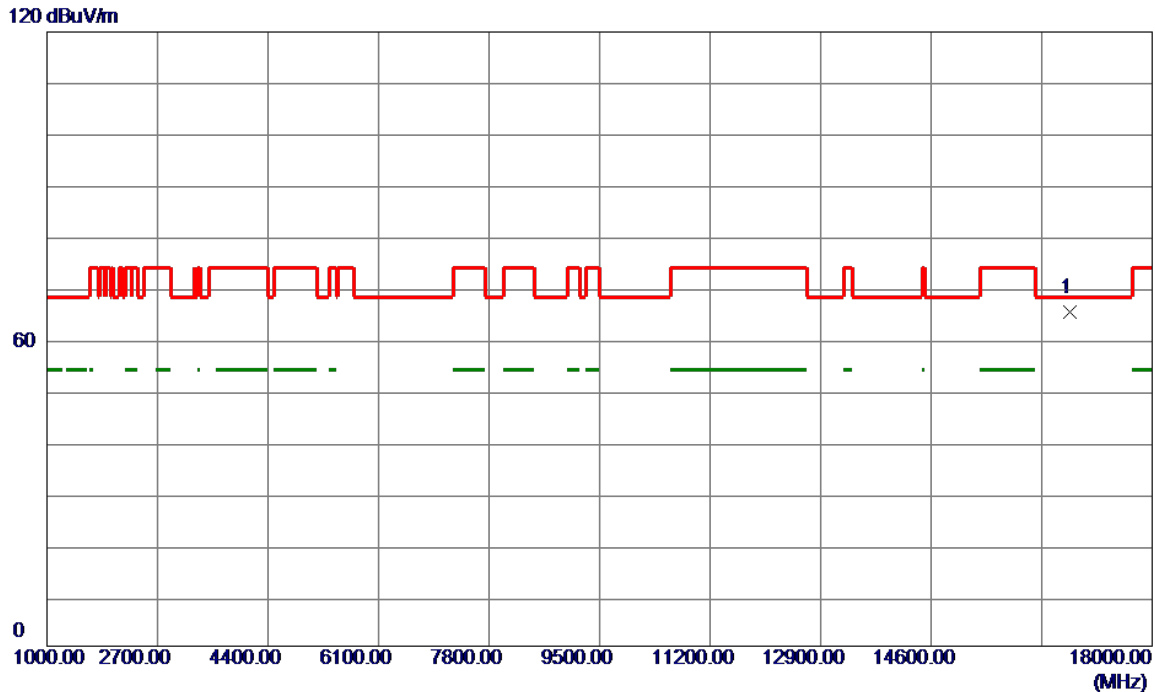


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16742.0000	57.52	7.82	65.34	68.20	-2.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

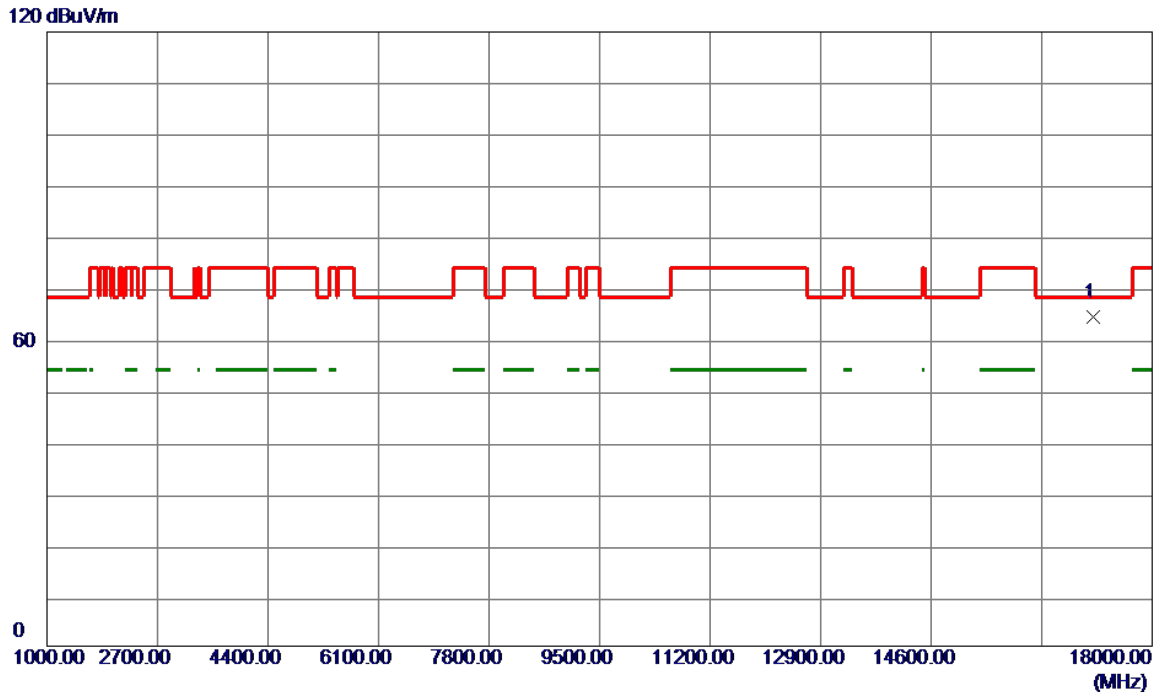


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17099.0000	56.55	7.69	64.24	68.20	-3.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

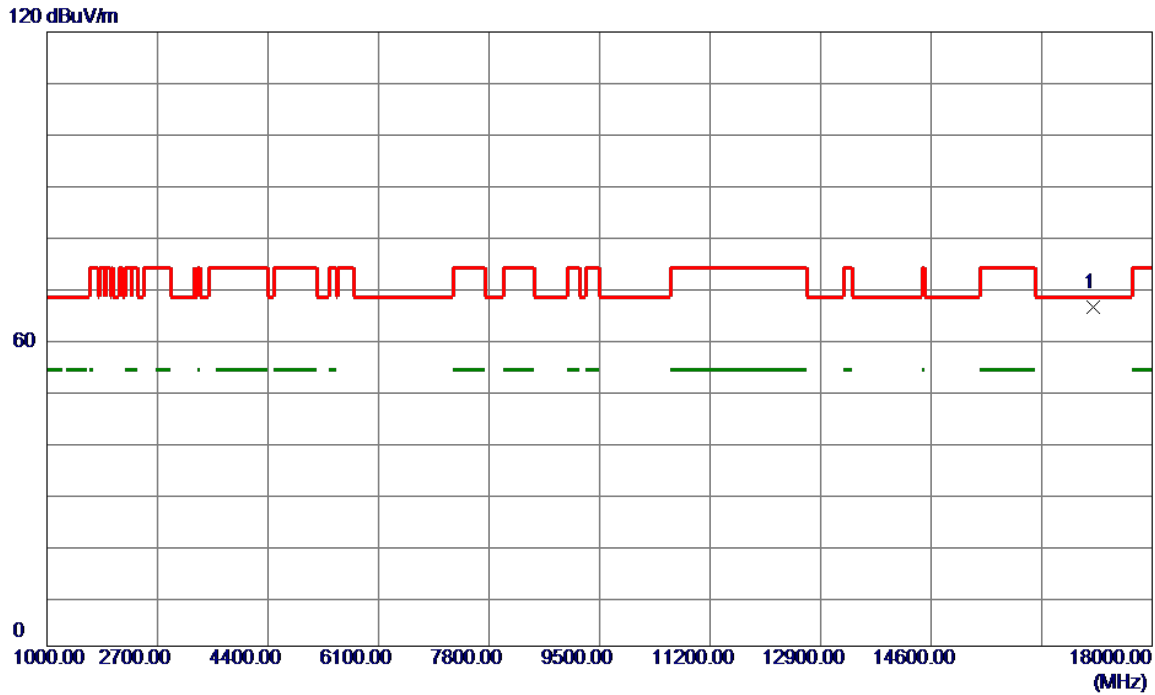


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17099.0000	58.50	7.69	66.19	68.20	-2.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

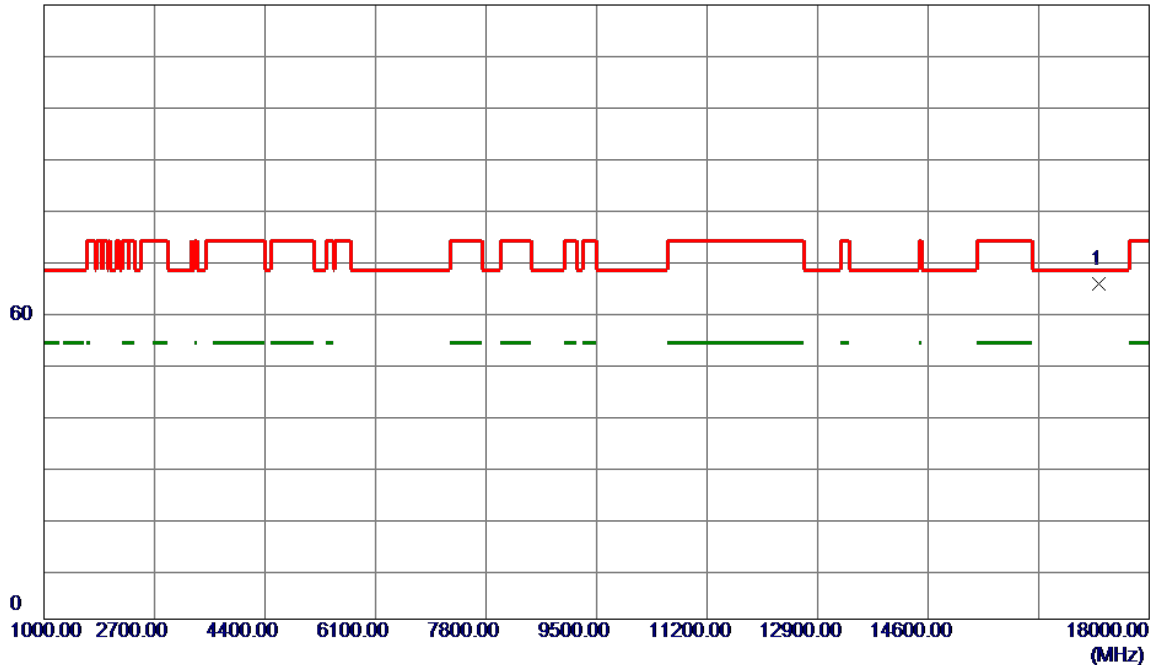


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17235.0000	57.83	7.75	65.58	68.20	-2.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

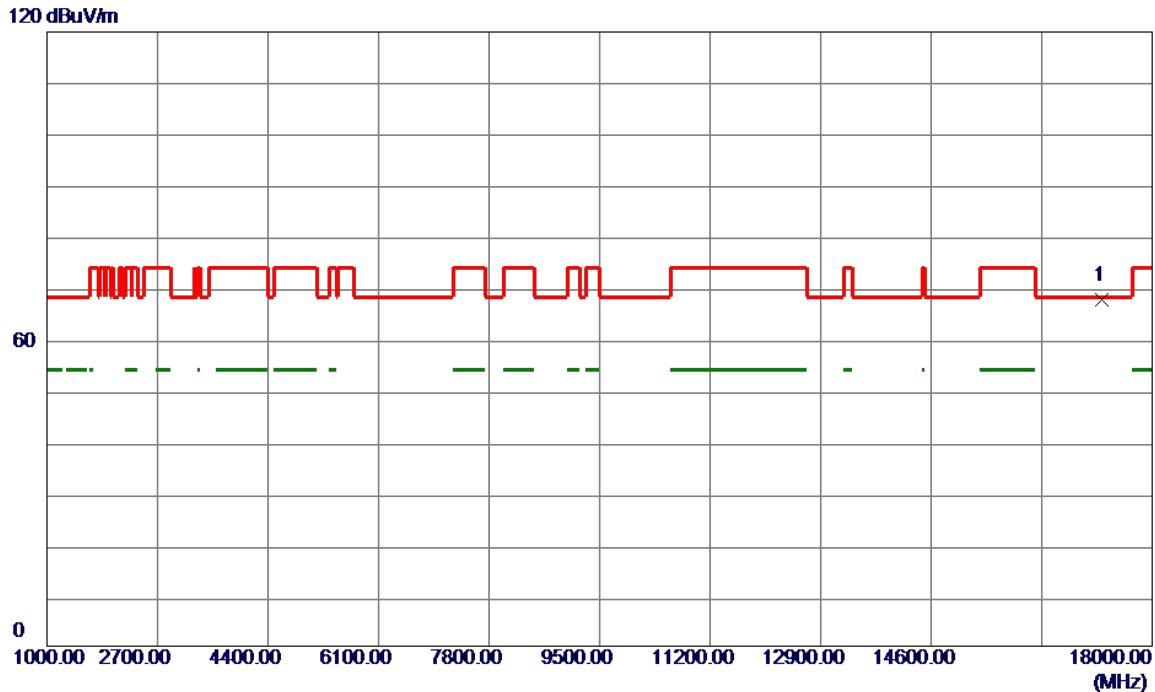


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17235.0000	59.85	7.75	67.60	68.20	-0.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

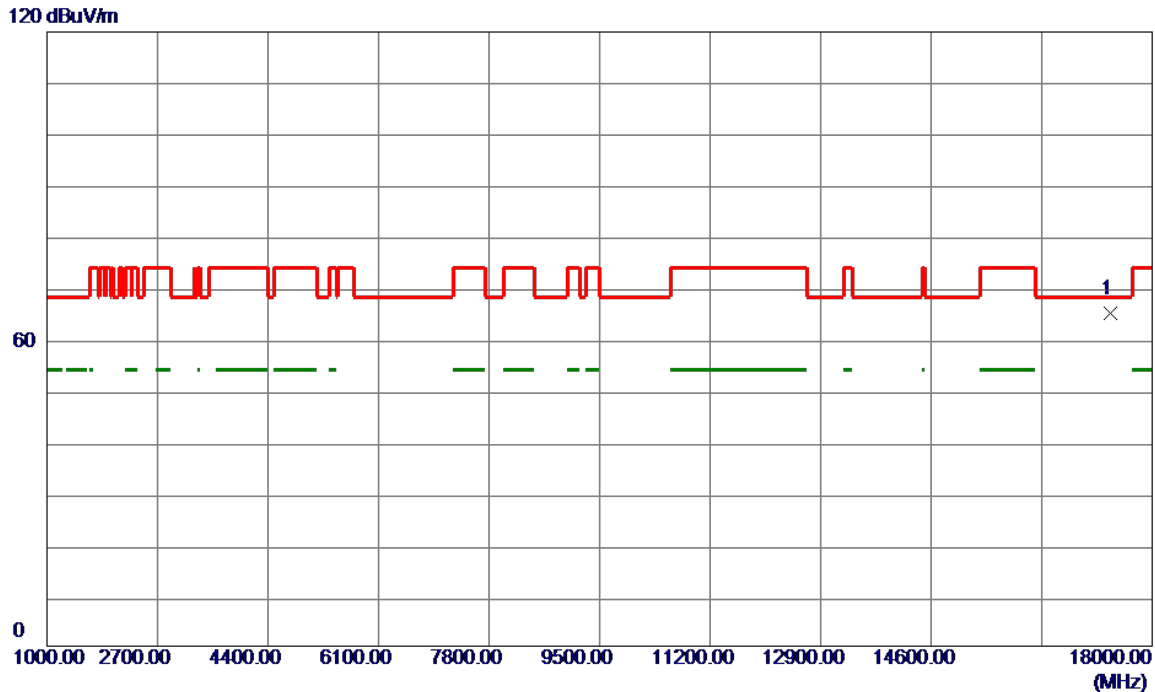


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17354.0000	57.33	7.80	65.13	68.20	-3.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

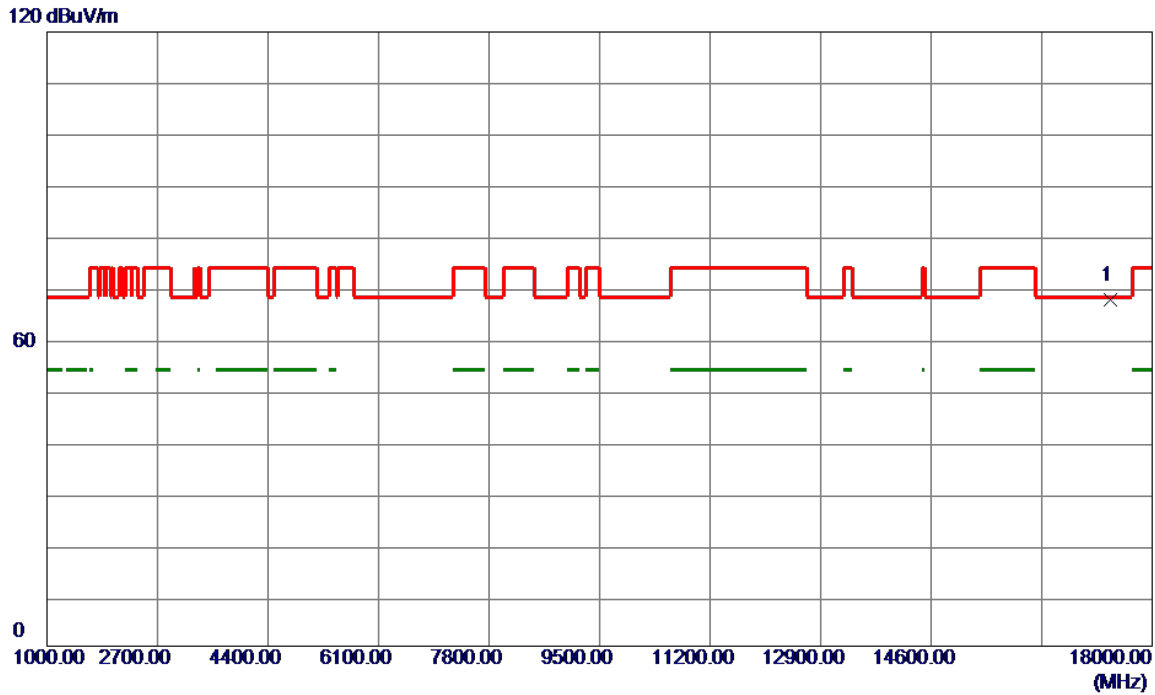


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17354.0000	59.85	7.80	67.65	68.20	-0.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

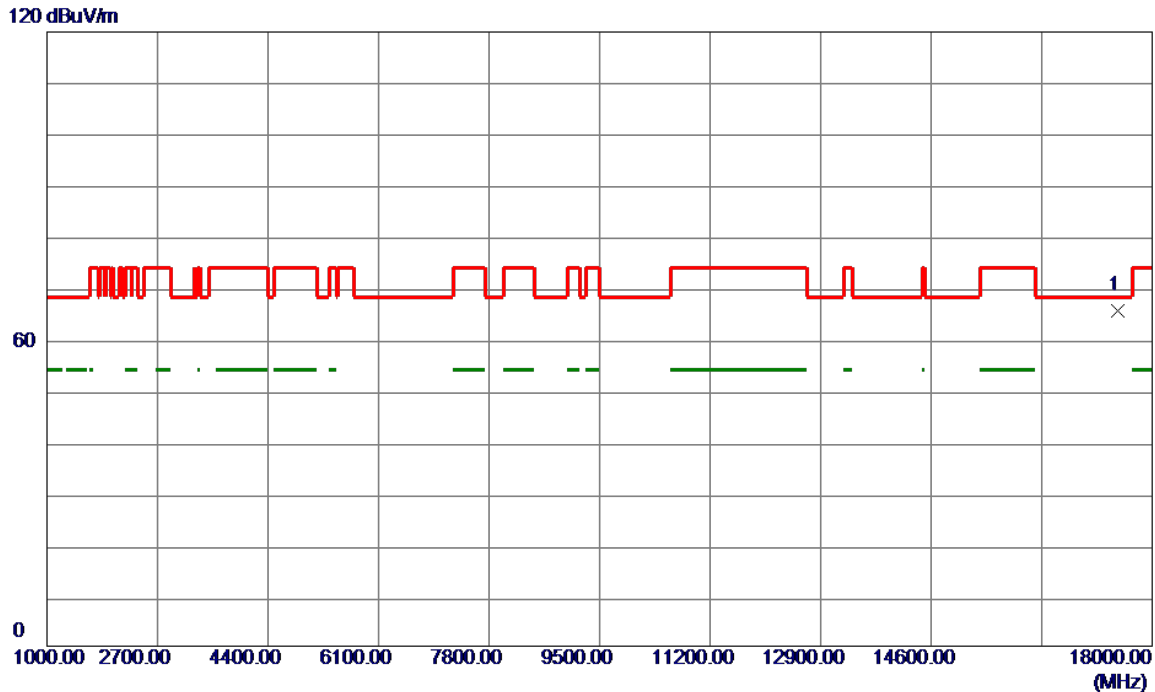


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17473.0000	57.78	7.86	65.64	68.20	-2.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/5/29
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

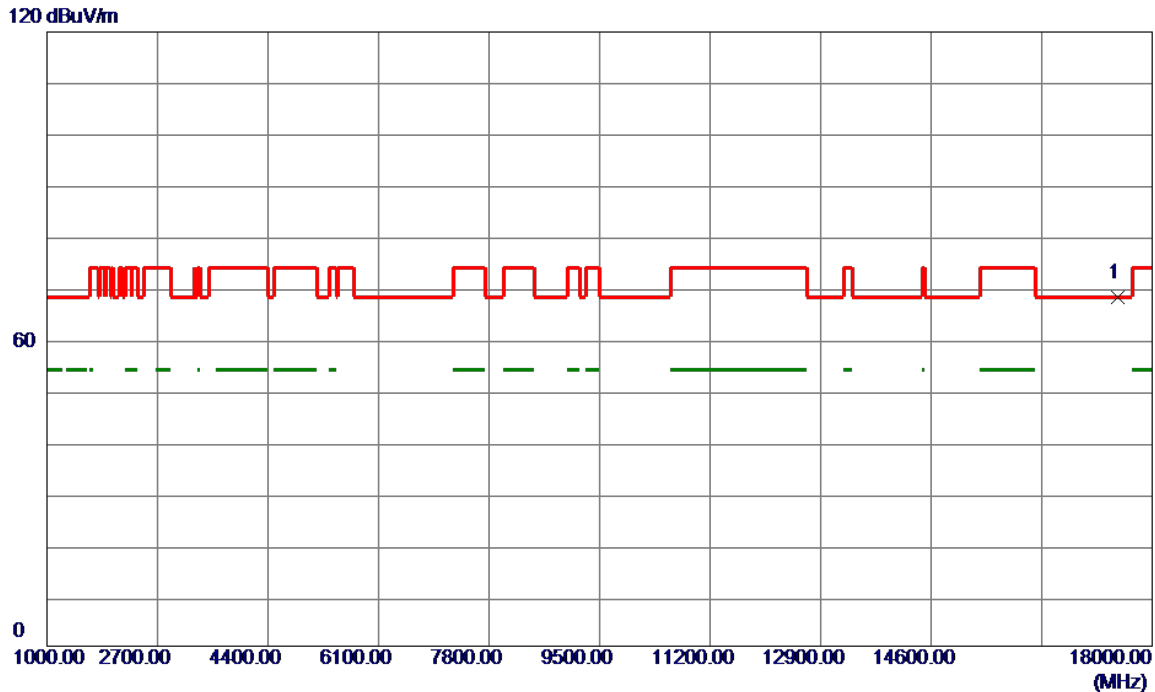


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17473.0000	60.26	7.86	68.12	68.20	-0.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

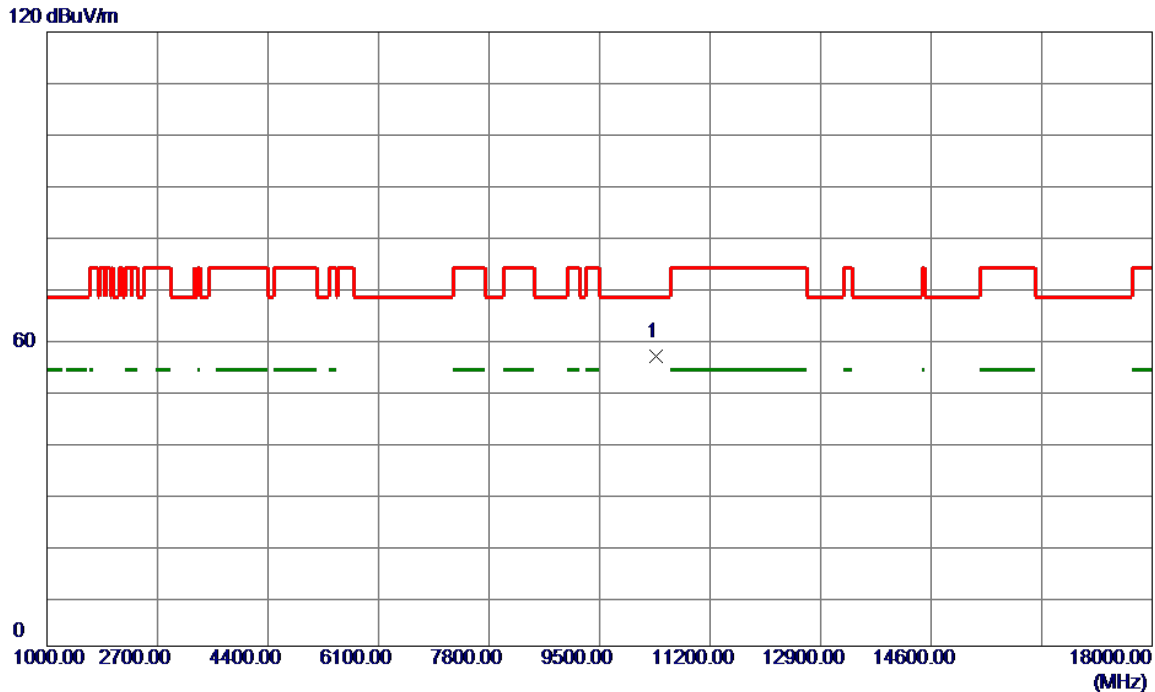


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10367.0000	48.86	7.66	56.52	68.20	-11.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

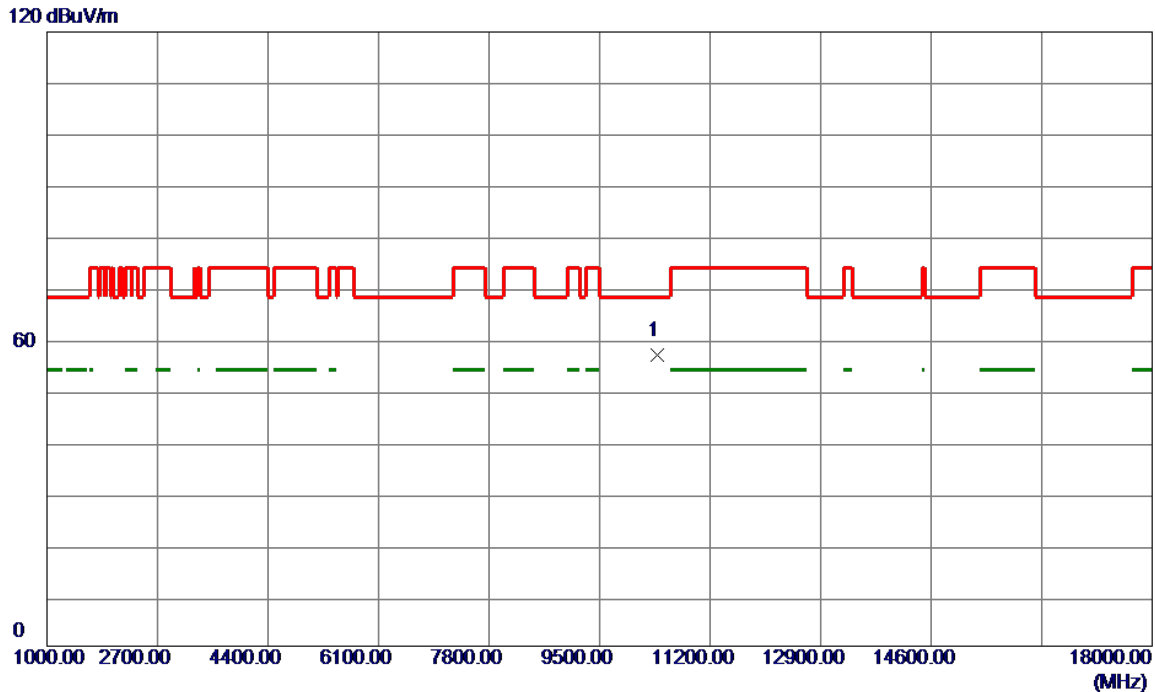


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10384.0000	49.33	7.66	56.99	68.20	-11.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

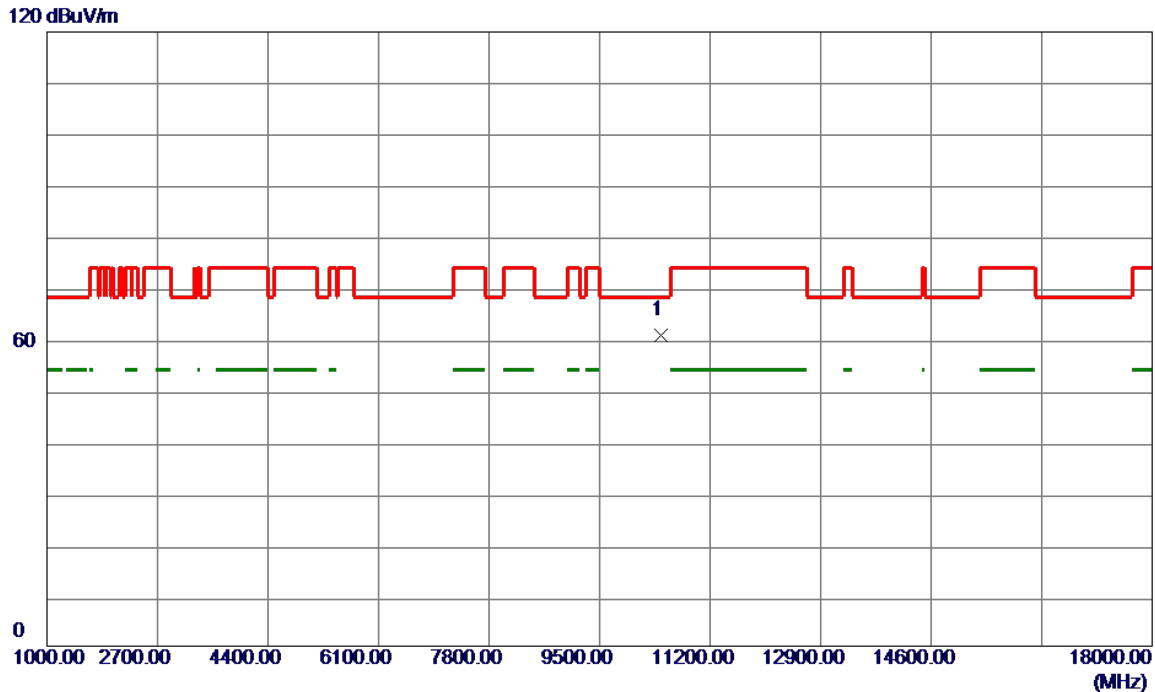


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10452.0000	53.15	7.69	60.84	68.20	-7.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

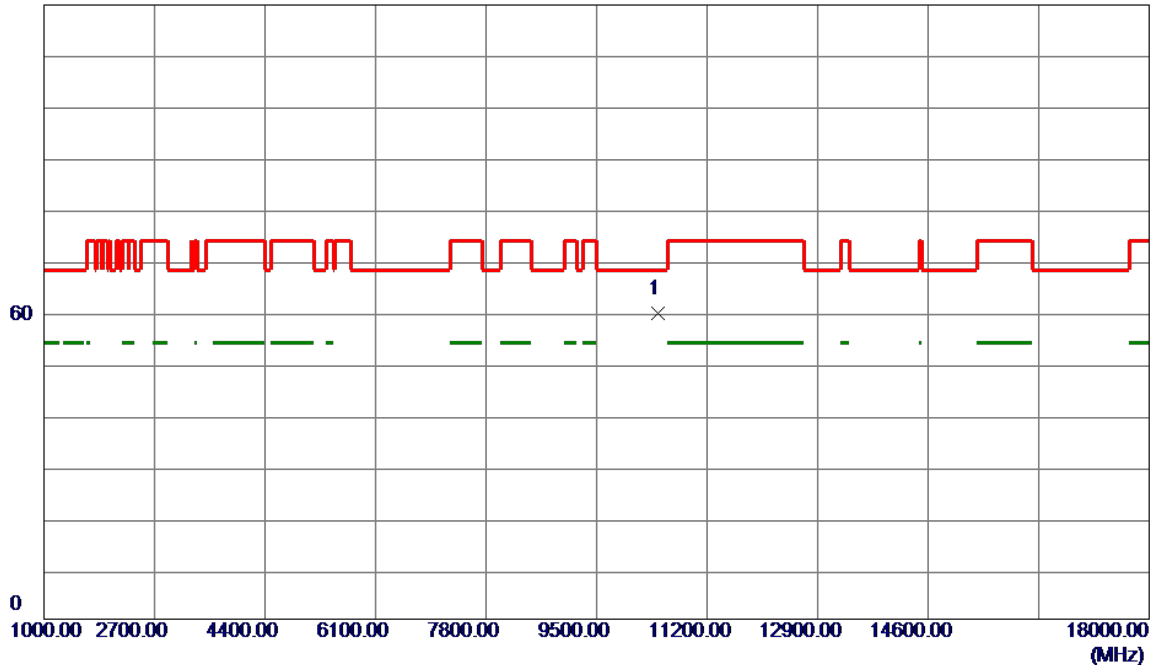


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10452.0000	52.11	7.69	59.80	68.20	-8.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/5/29
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

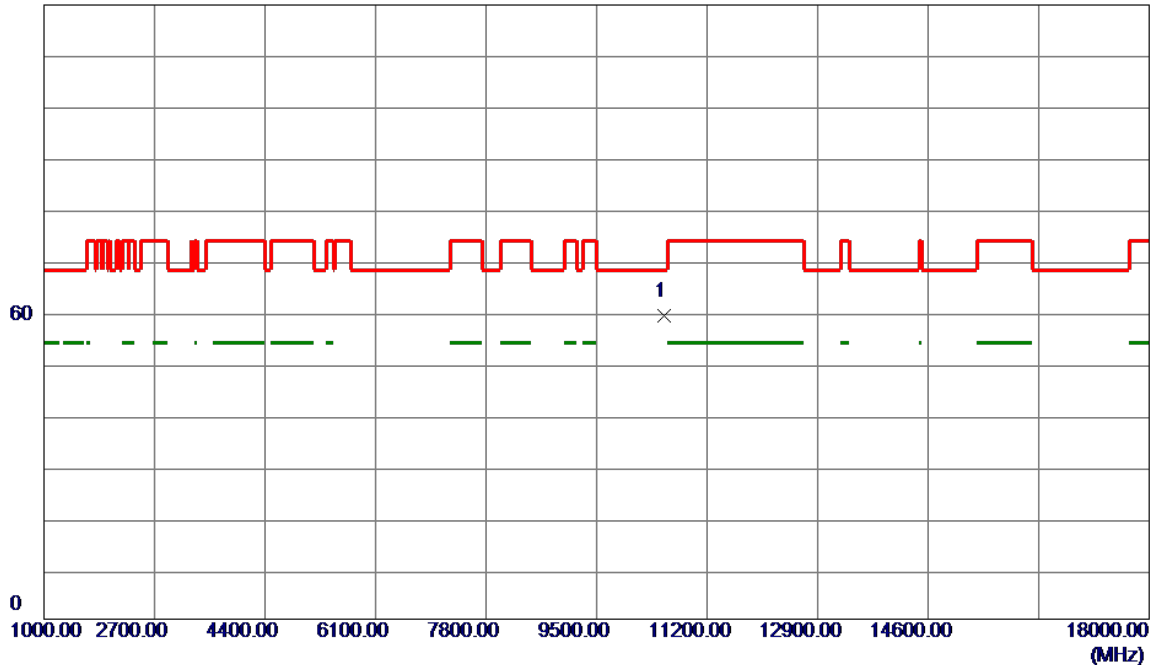


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10537.0000	51.65	7.74	59.39	68.20	-8.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

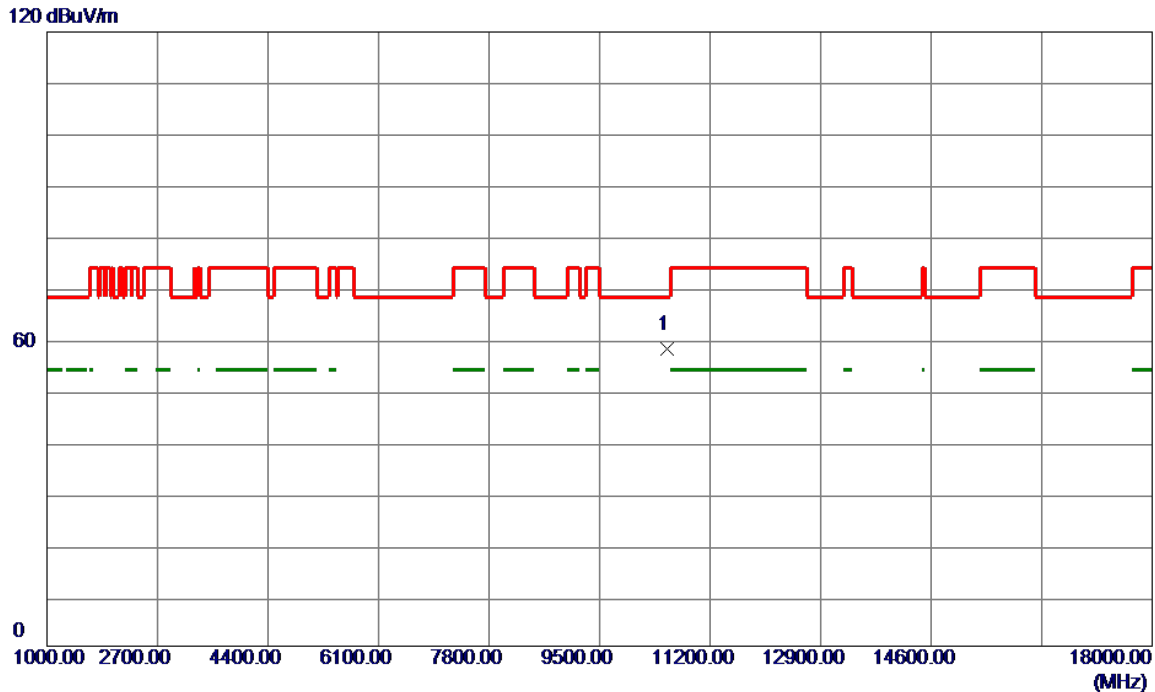


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	50.36	7.74	58.10	68.20	-10.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

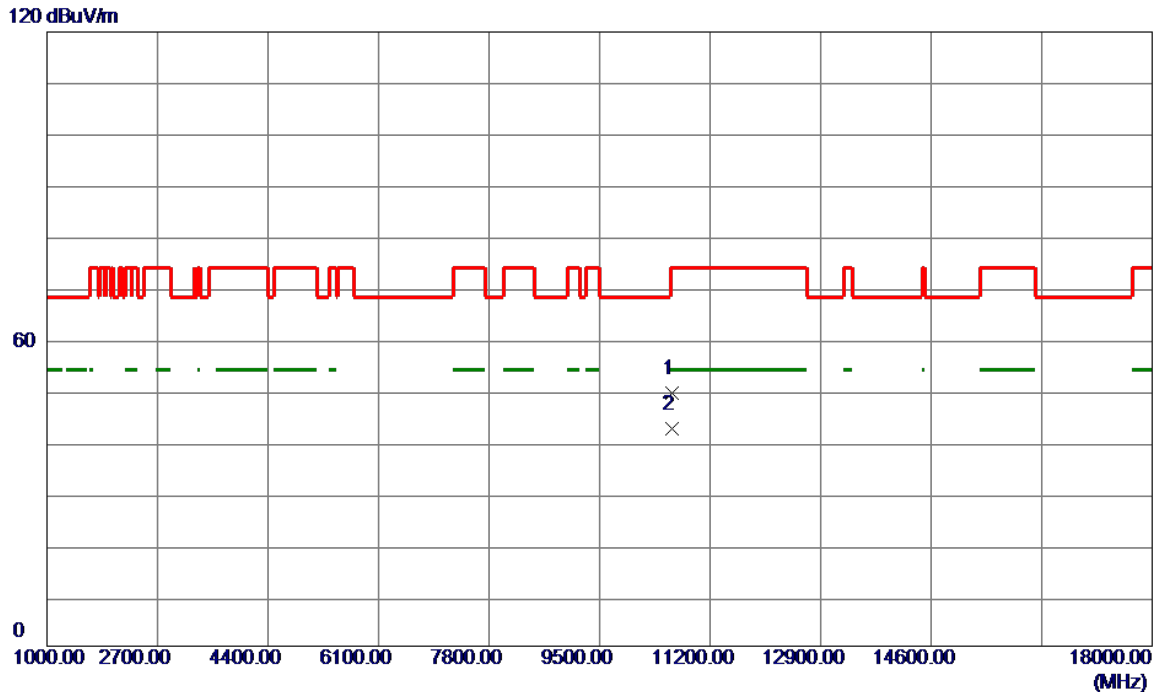


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	41.61	7.79	49.40	74.00	-24.60	Peak	
2 *	10620.0000	34.64	7.79	42.43	54.00	-11.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

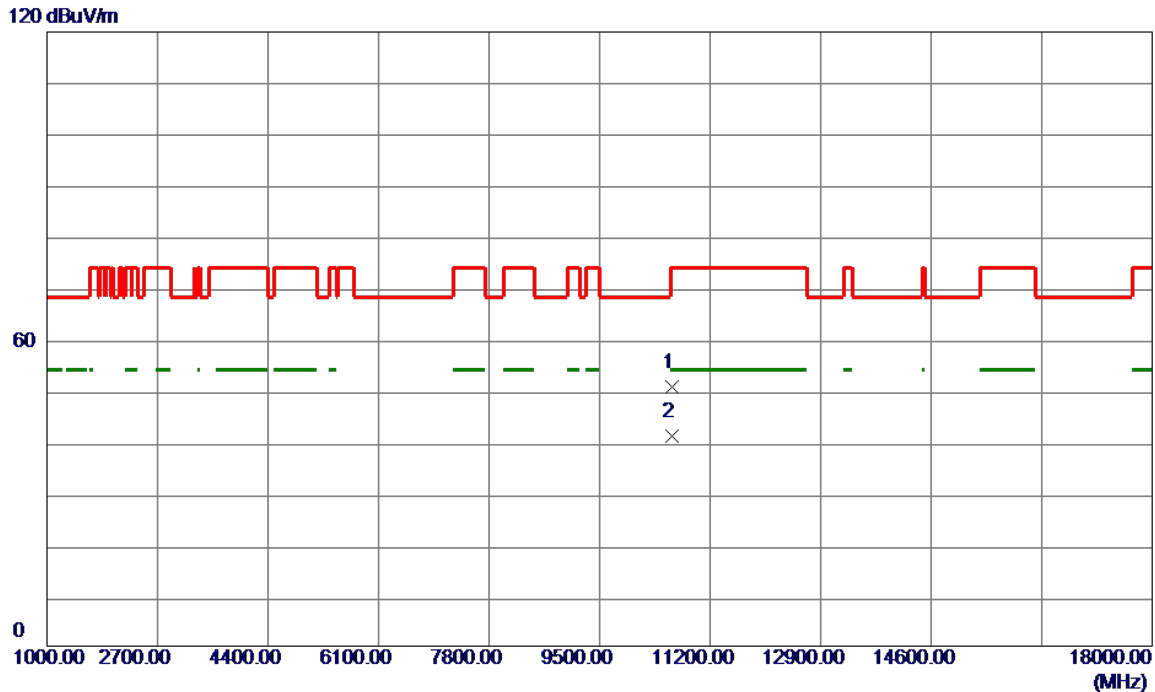


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	42.85	7.79	50.64	74.00	-23.36	Peak	
2 *	10620.0000	33.14	7.79	40.93	54.00	-13.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

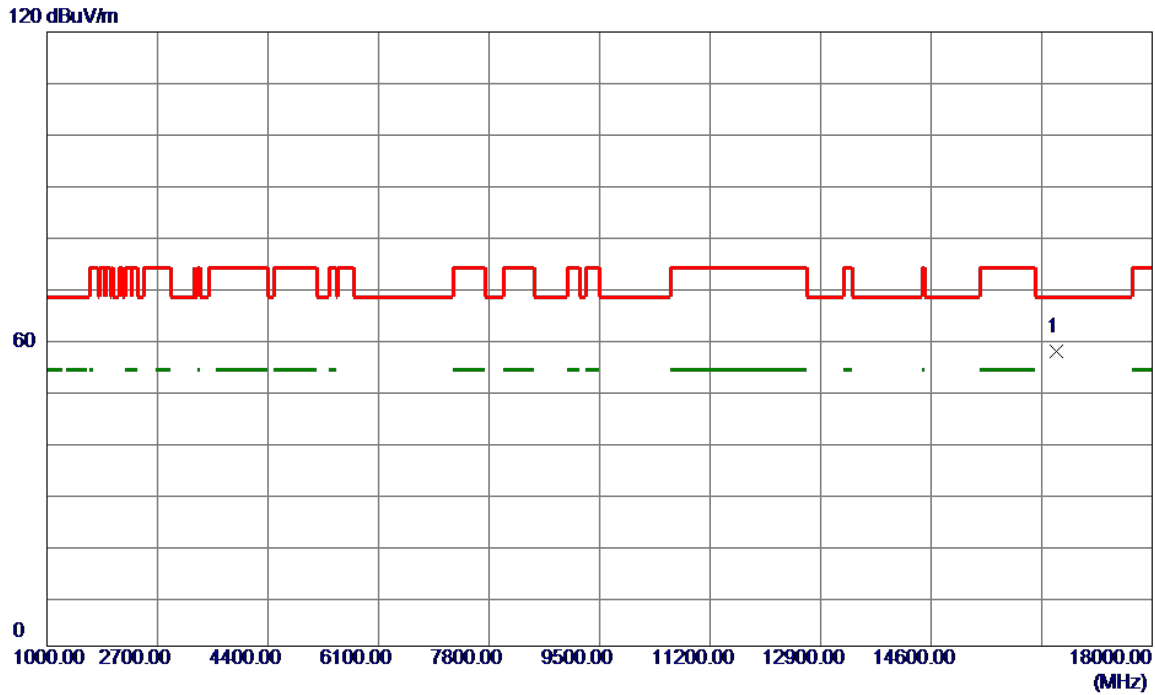


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16530.0000	49.74	7.96	57.70	68.20	-10.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

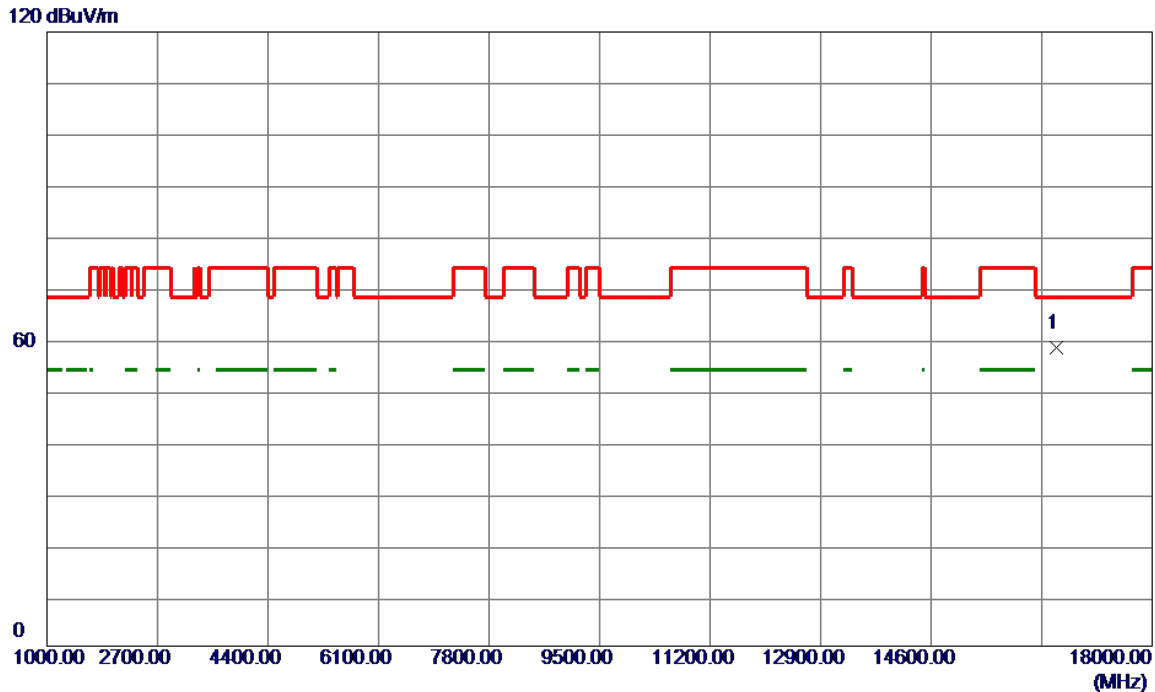


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16530.0000	50.29	7.96	58.25	68.20	-9.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

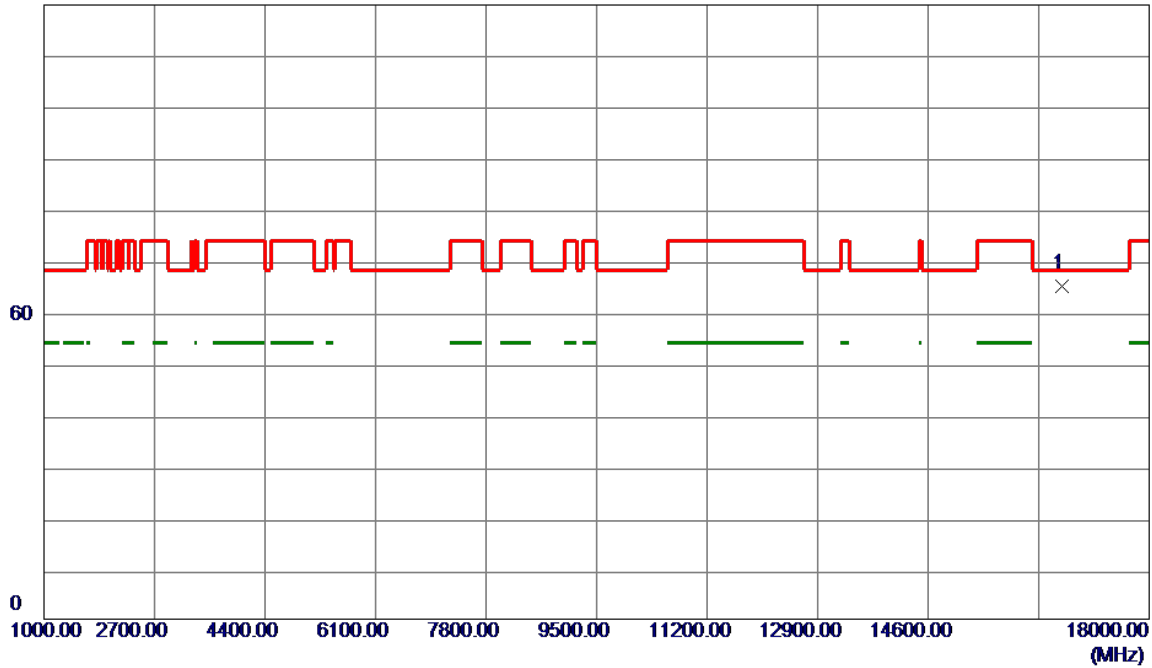


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16650.0000	57.04	7.88	64.92	68.20	-3.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5550MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

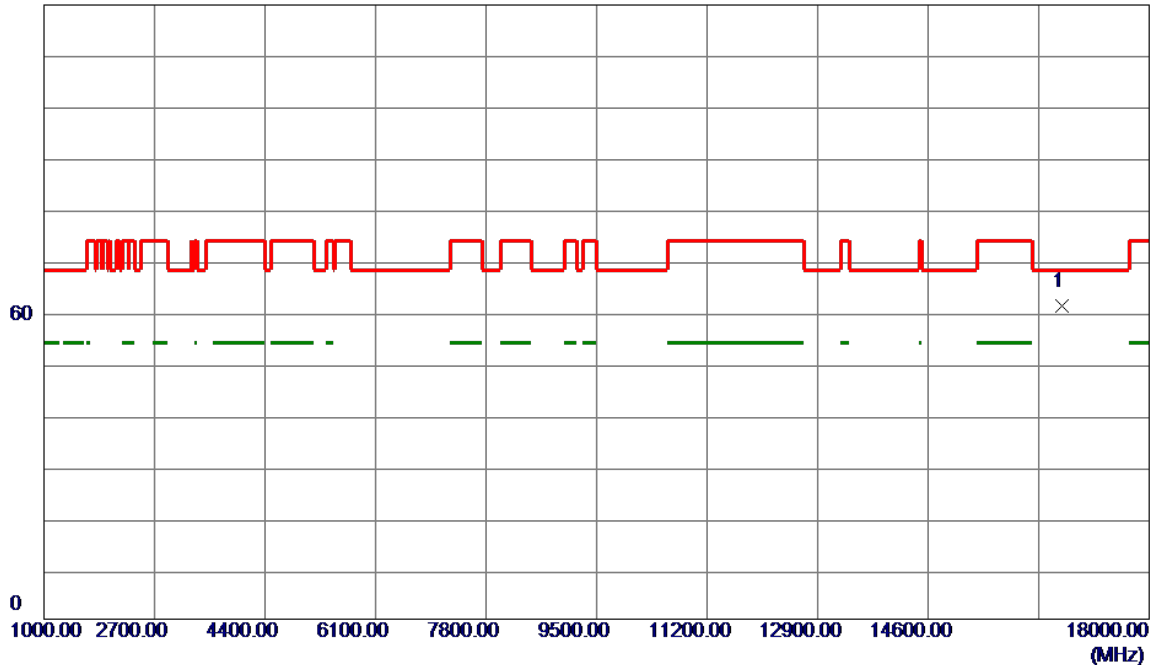


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16650.0000	53.30	7.88	61.18	68.20	-7.02	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

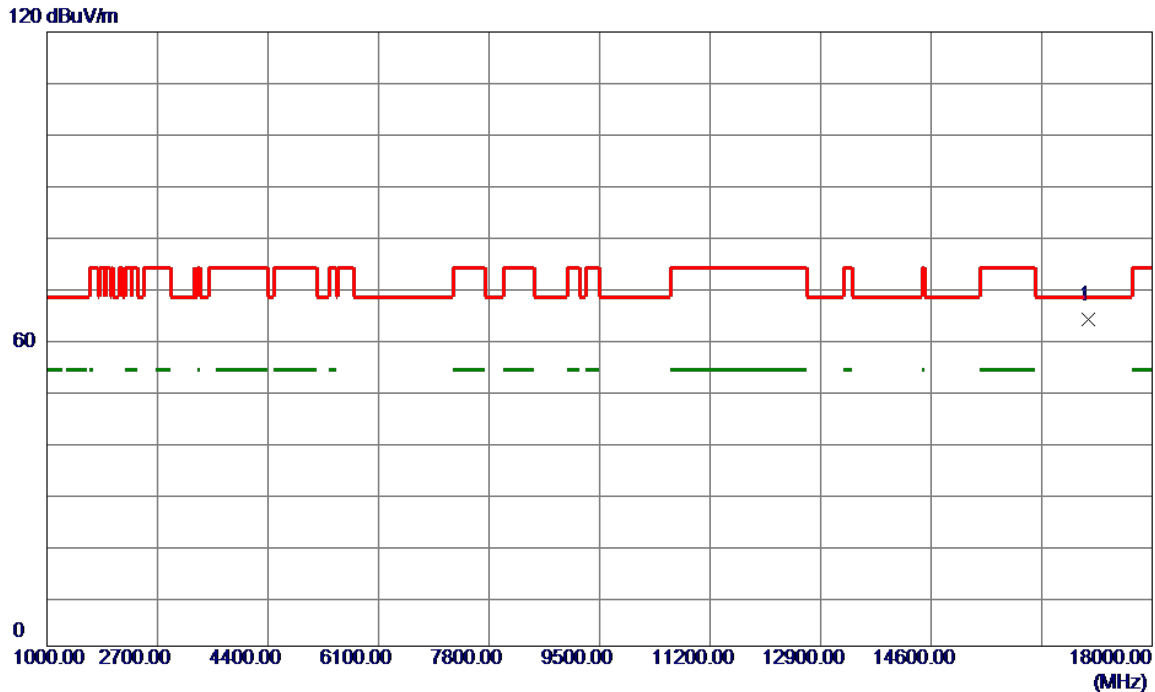


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17010.0000	56.27	7.64	63.91	68.20	-4.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

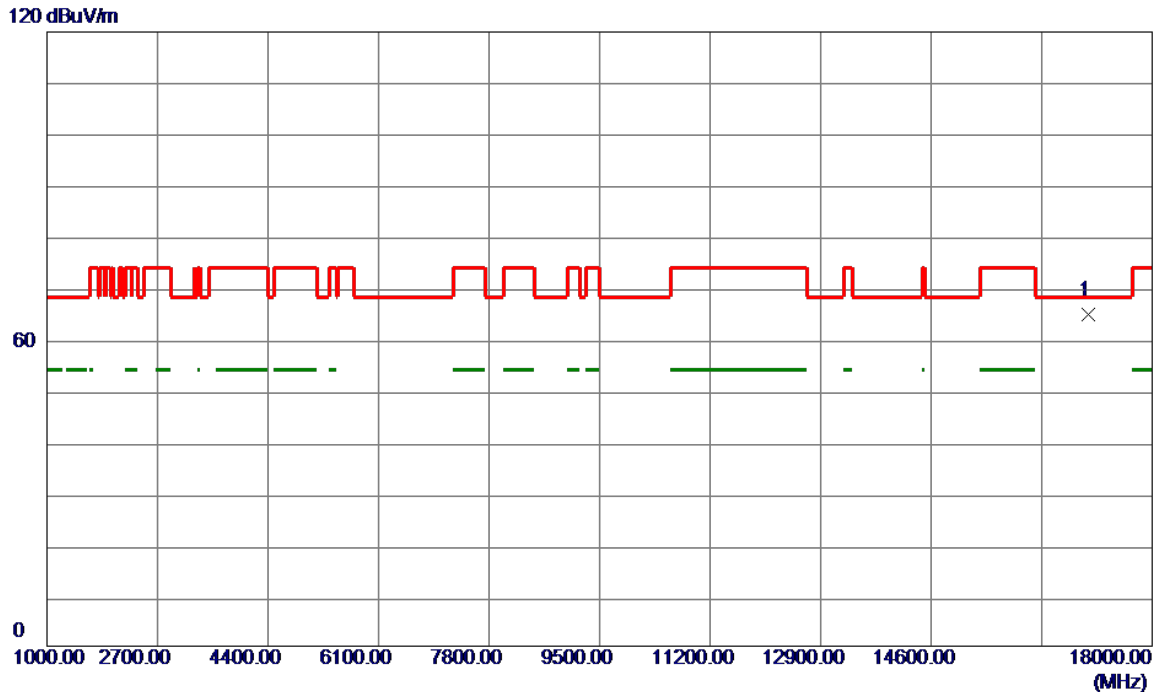


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17010.0000	57.27	7.64	64.91	68.20	-3.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

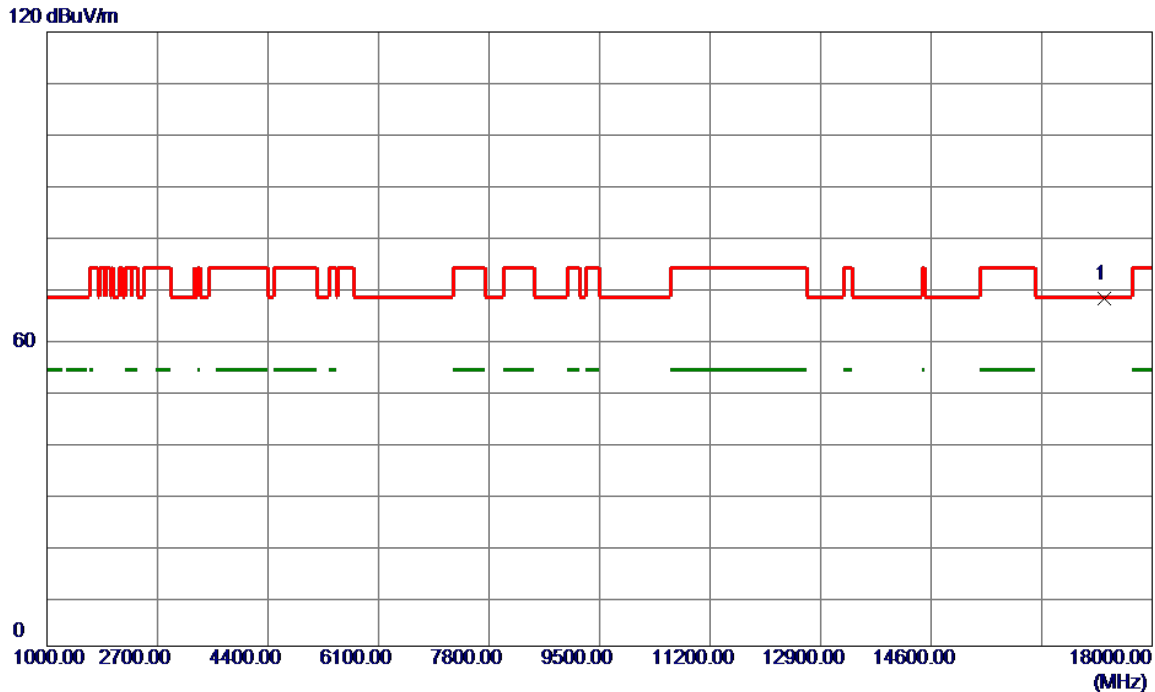


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17265.0000	60.26	7.76	68.02	68.20	-0.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

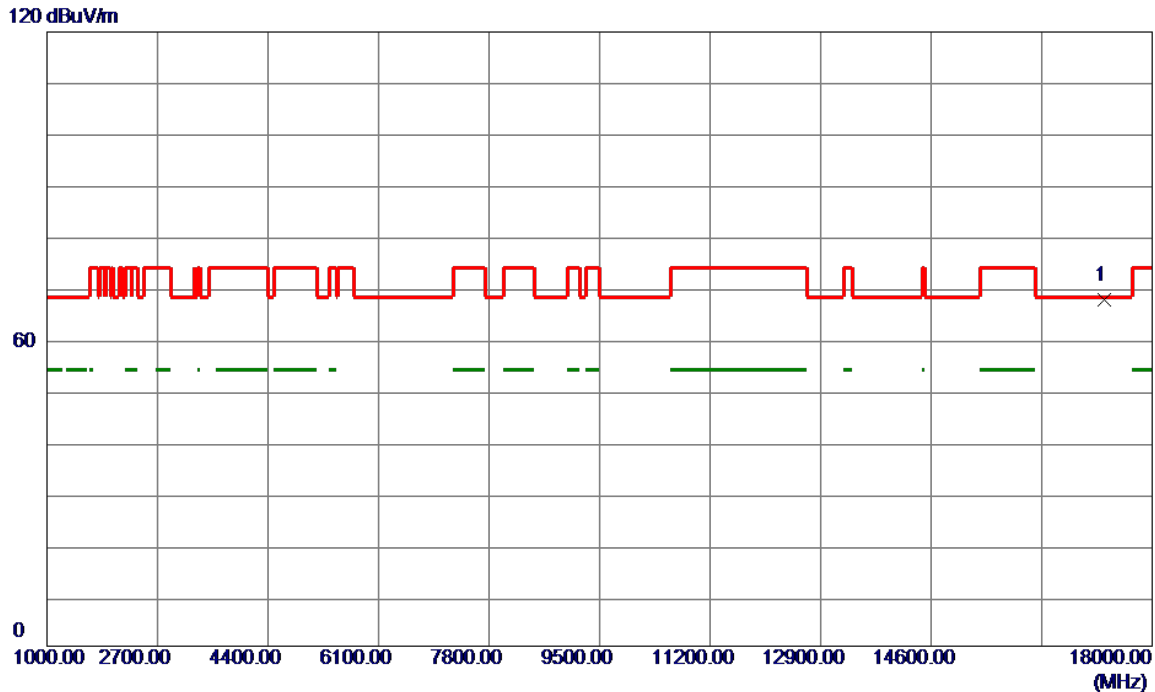


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17265.0000	59.92	7.76	67.68	68.20	-0.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

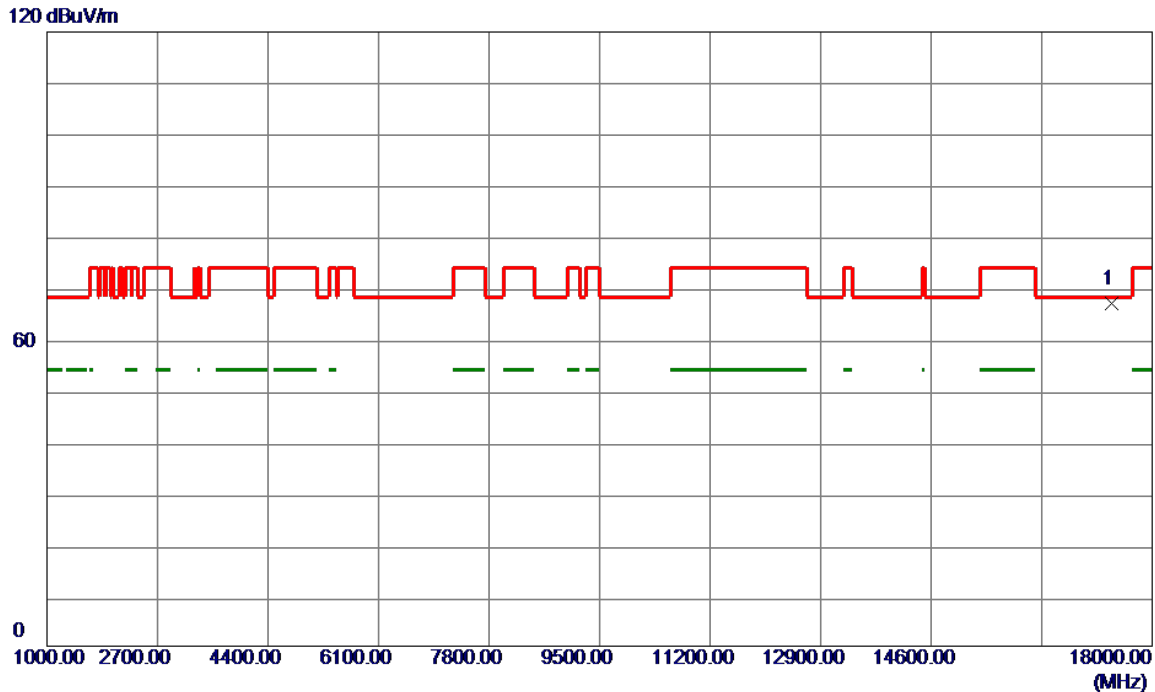


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17385.0000	59.03	7.82	66.85	68.20	-1.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/6/2
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

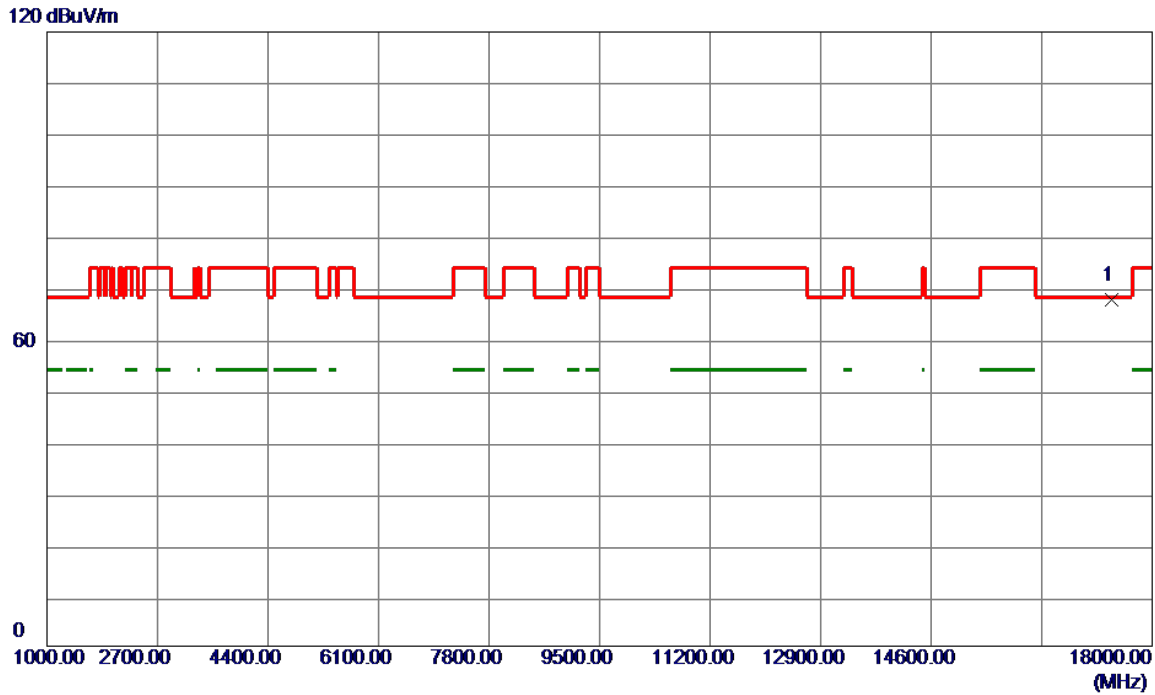


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17385.0000	59.95	7.82	67.77	68.20	-0.43	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

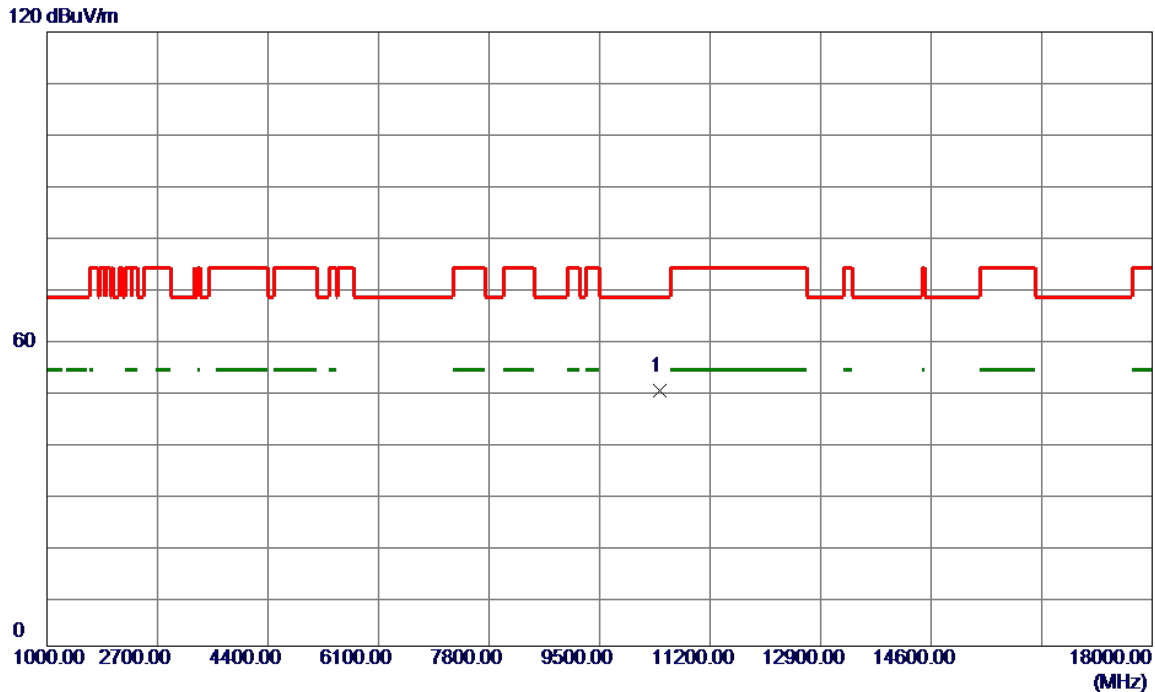


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10420.0000	42.17	7.68	49.85	68.20	-18.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

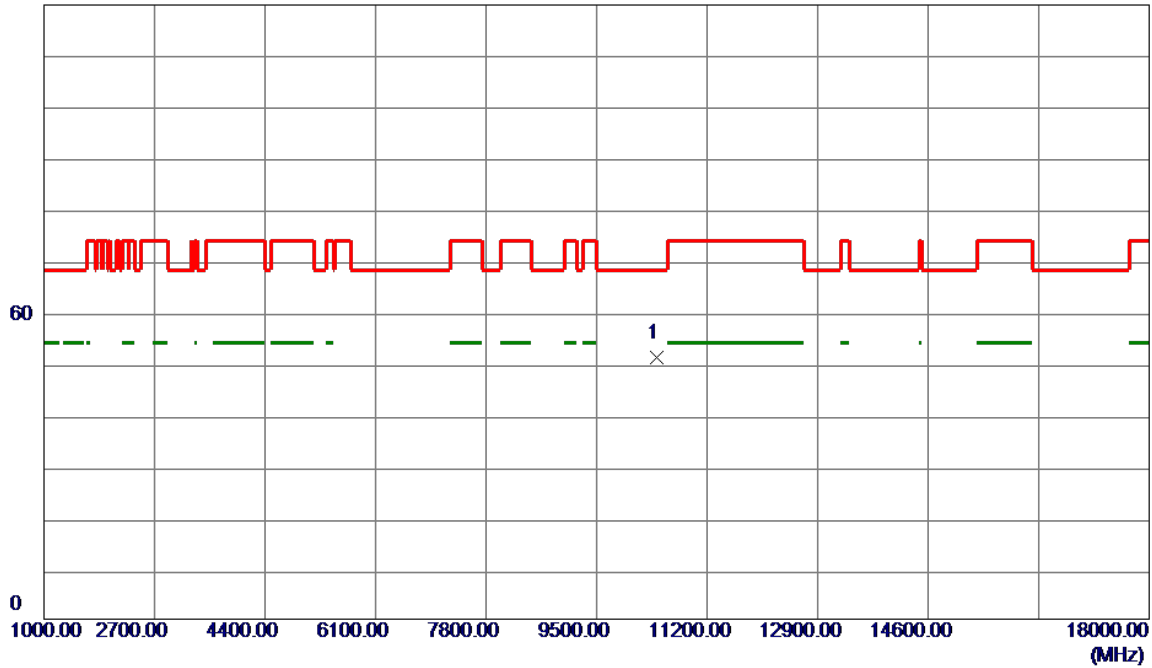


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10420.0000	43.38	7.68	51.06	68.20	-17.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

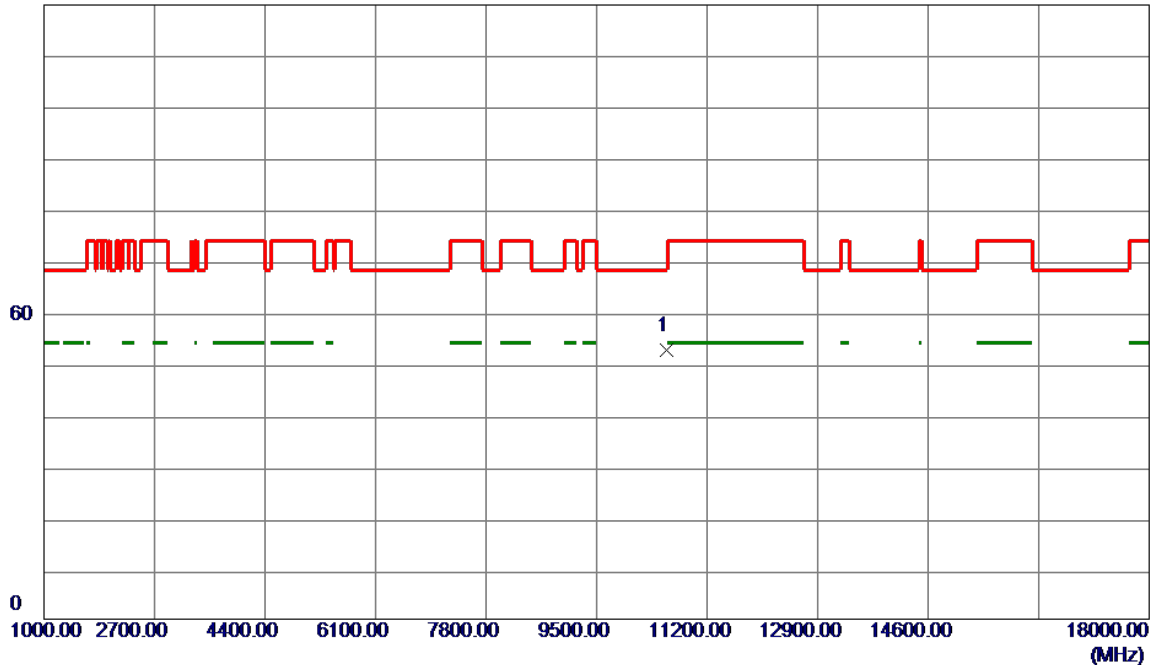


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	44.74	7.76	52.50	68.20	-15.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

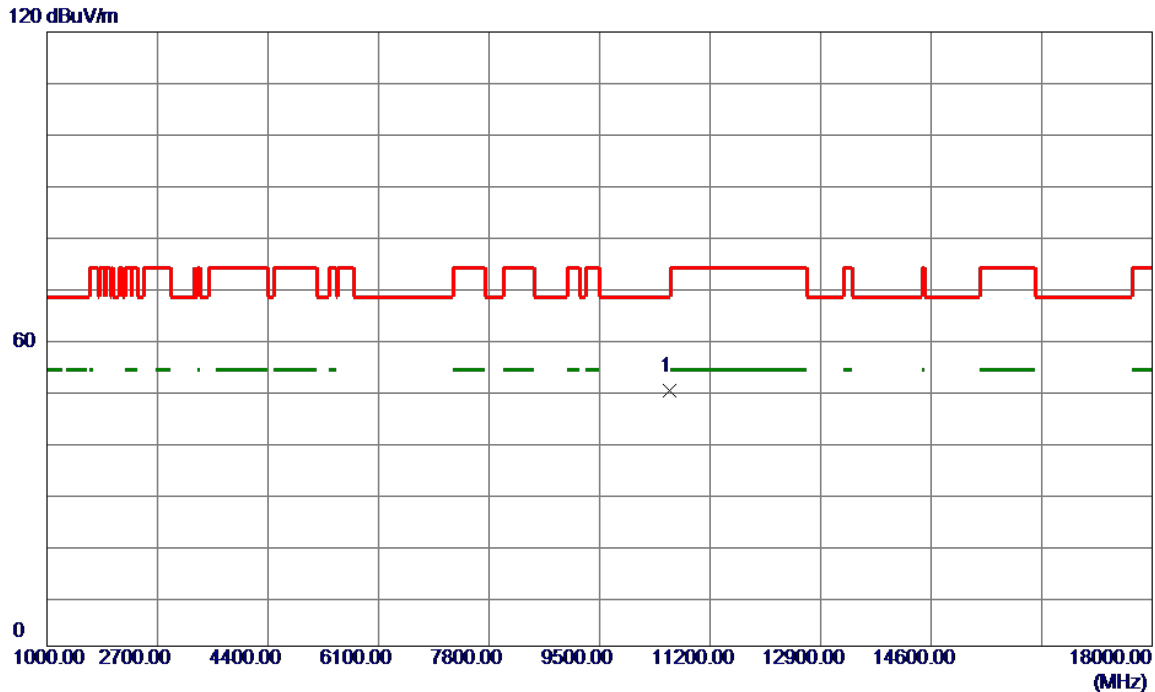


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10580.0000	42.12	7.76	49.88	68.20	-18.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

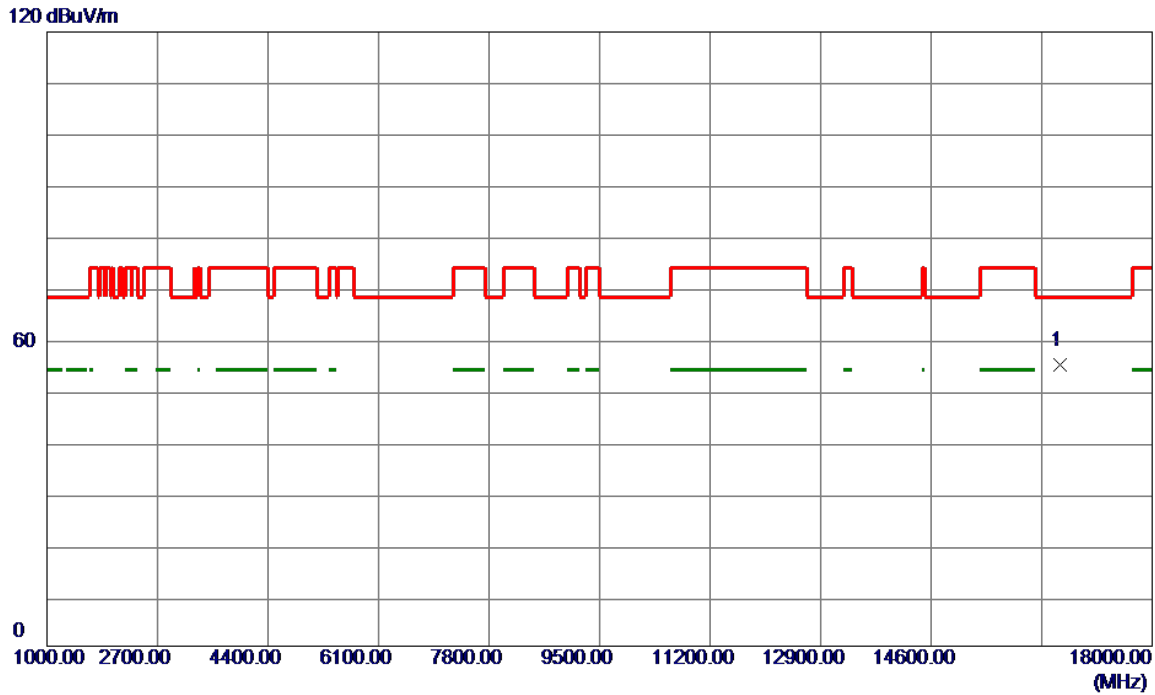


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16590.0000	46.92	7.92	54.84	68.20	-13.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

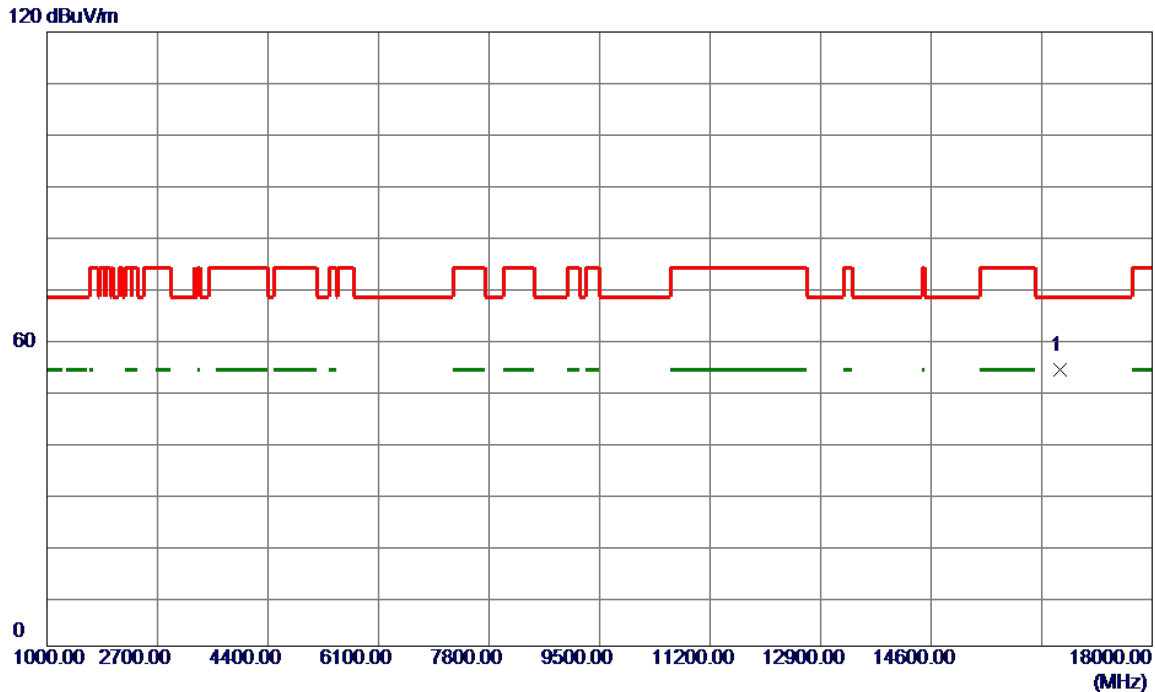


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16590.0000	45.98	7.92	53.90	68.20	-14.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

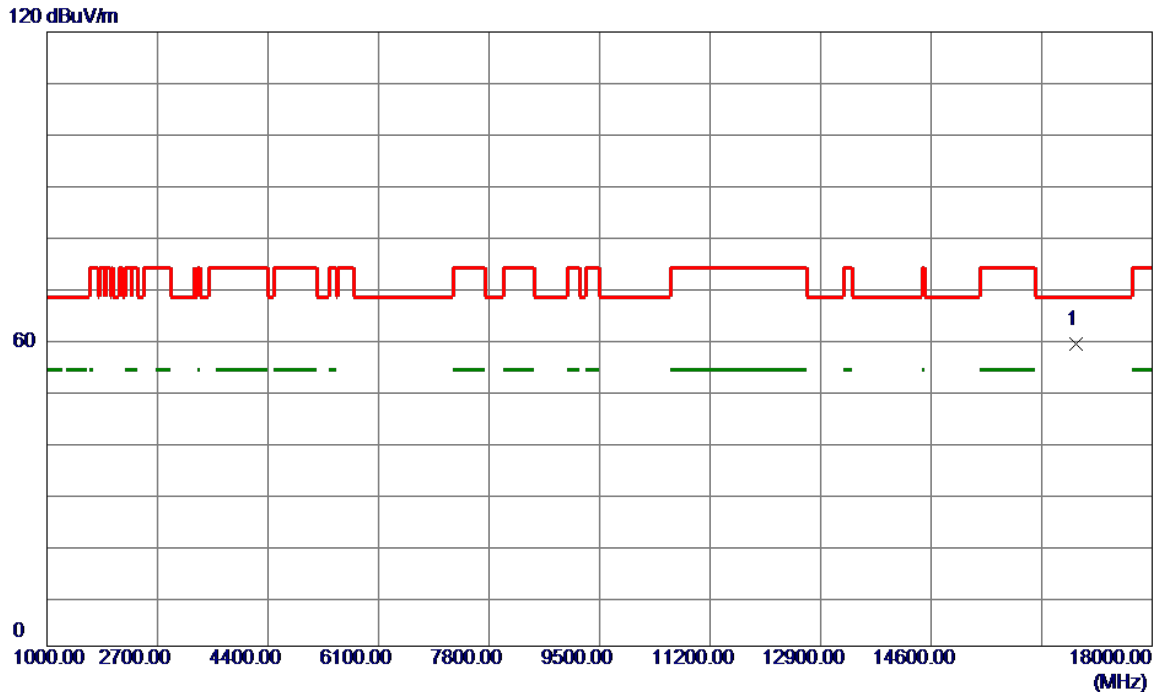


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16830.0000	51.37	7.76	59.13	68.20	-9.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

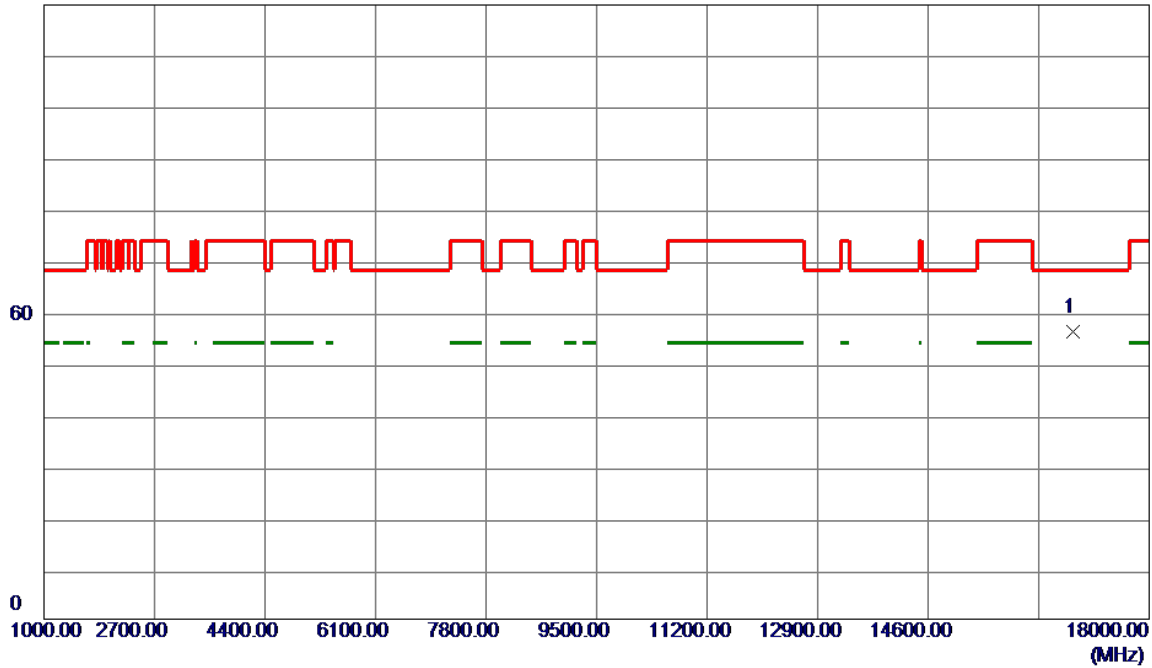


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16830.0000	48.51	7.76	56.27	68.20	-11.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

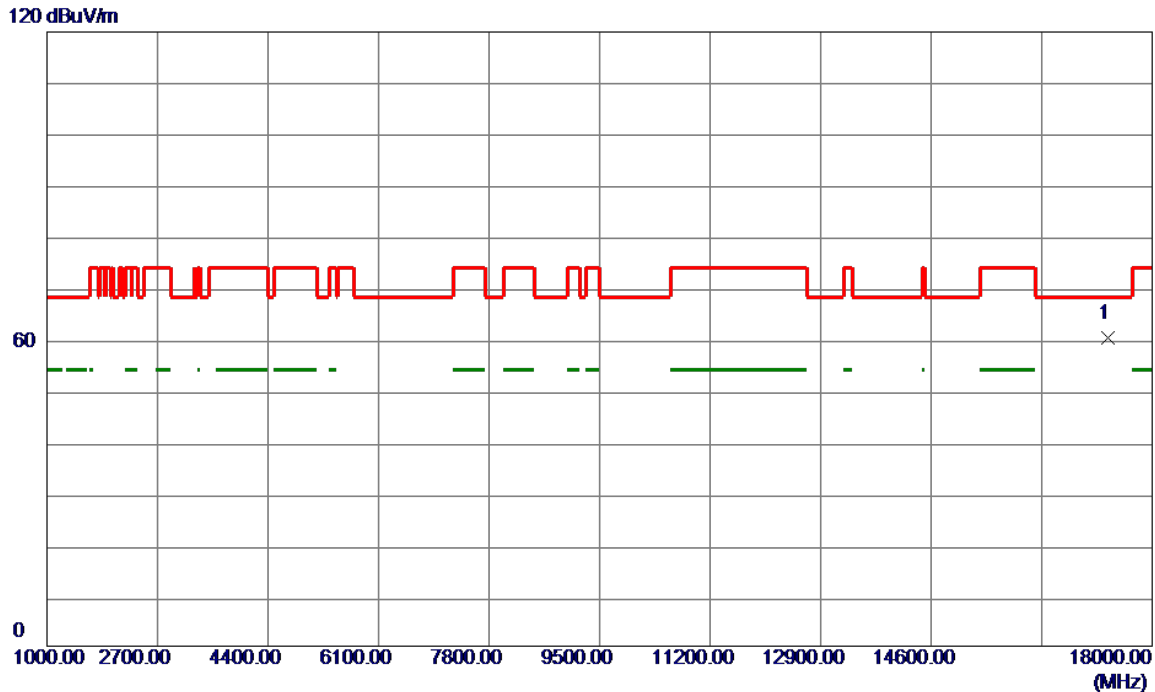


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17325.0000	52.34	7.79	60.13	68.20	-8.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/6/2
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

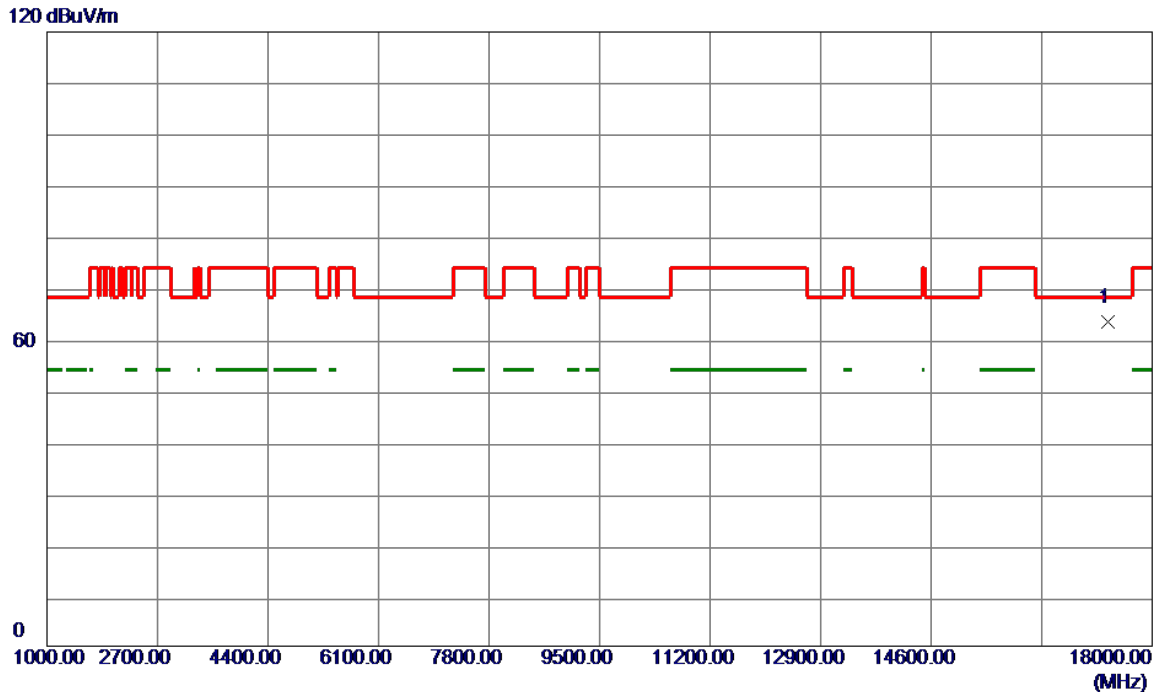


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17325.0000	55.46	7.79	63.25	68.20	-4.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

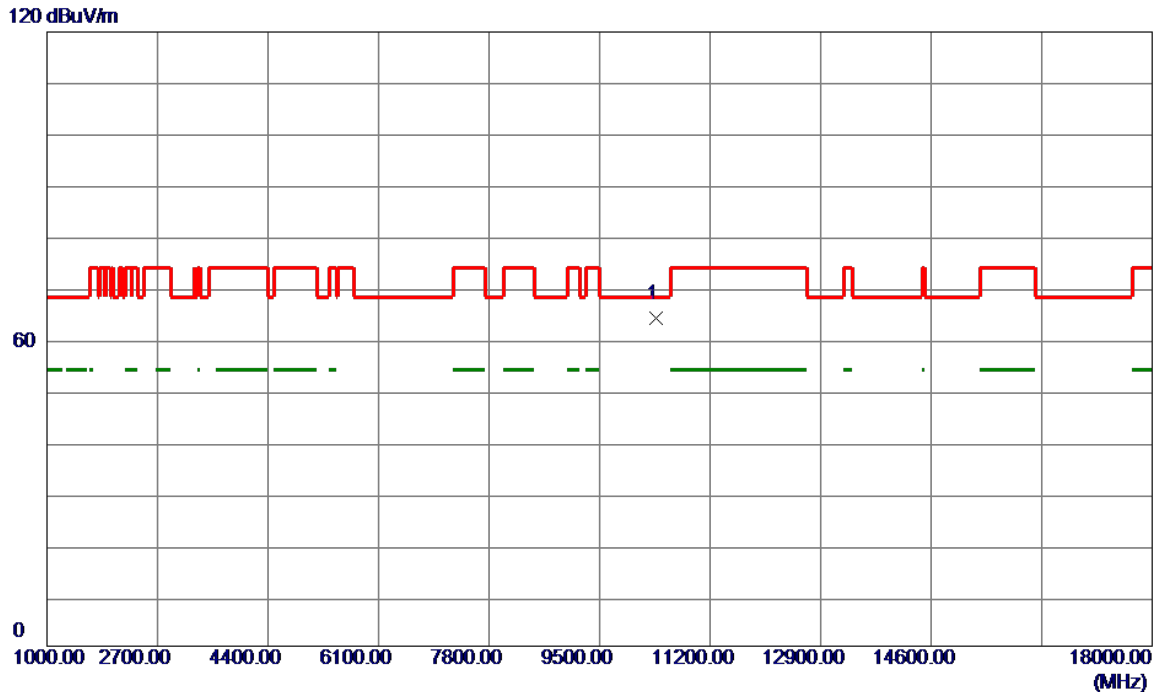


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	56.37	7.65	64.02	68.20	-4.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

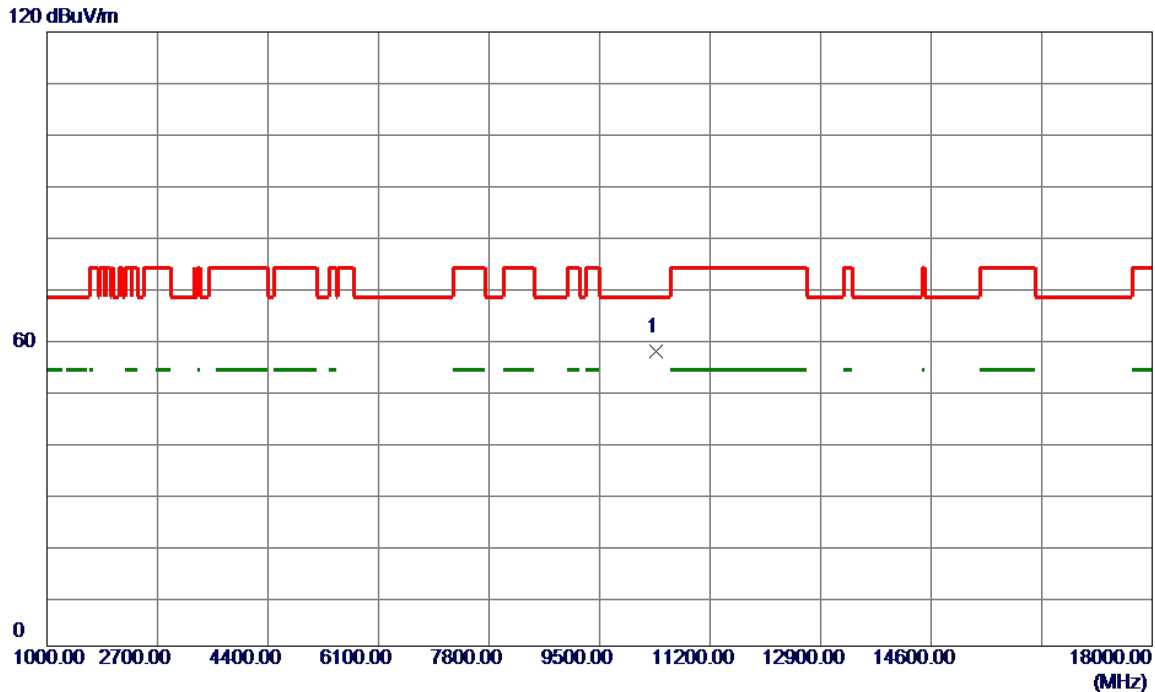


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10360.0000	49.86	7.65	57.51	68.20	-10.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

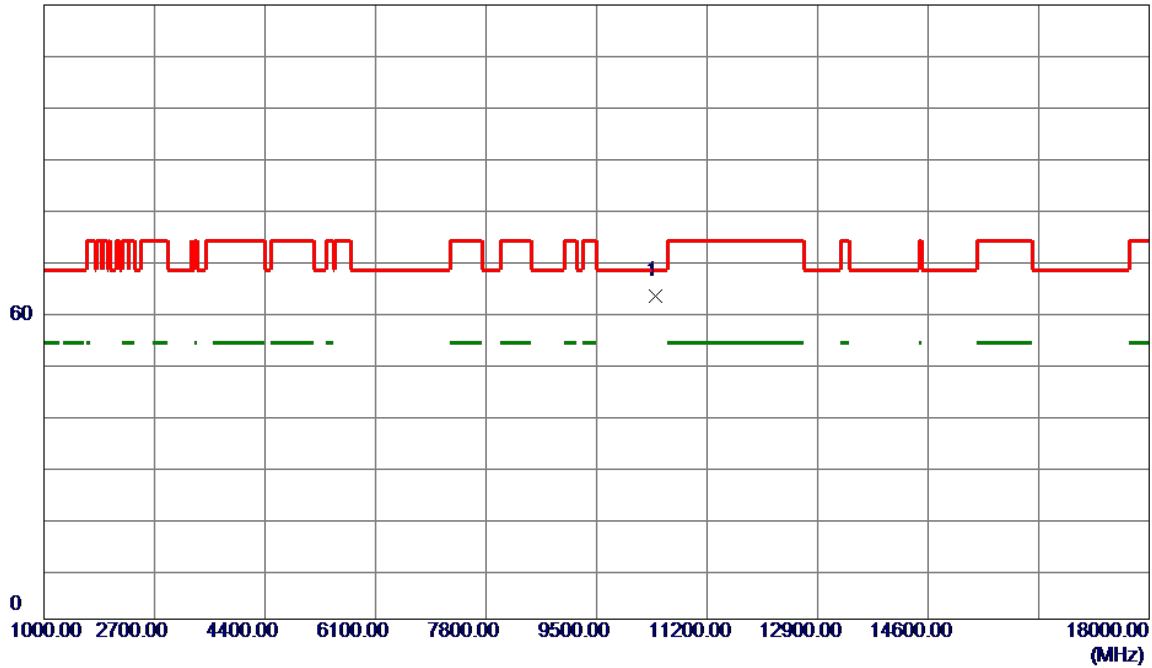


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	55.57	7.67	63.24	68.20	-4.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

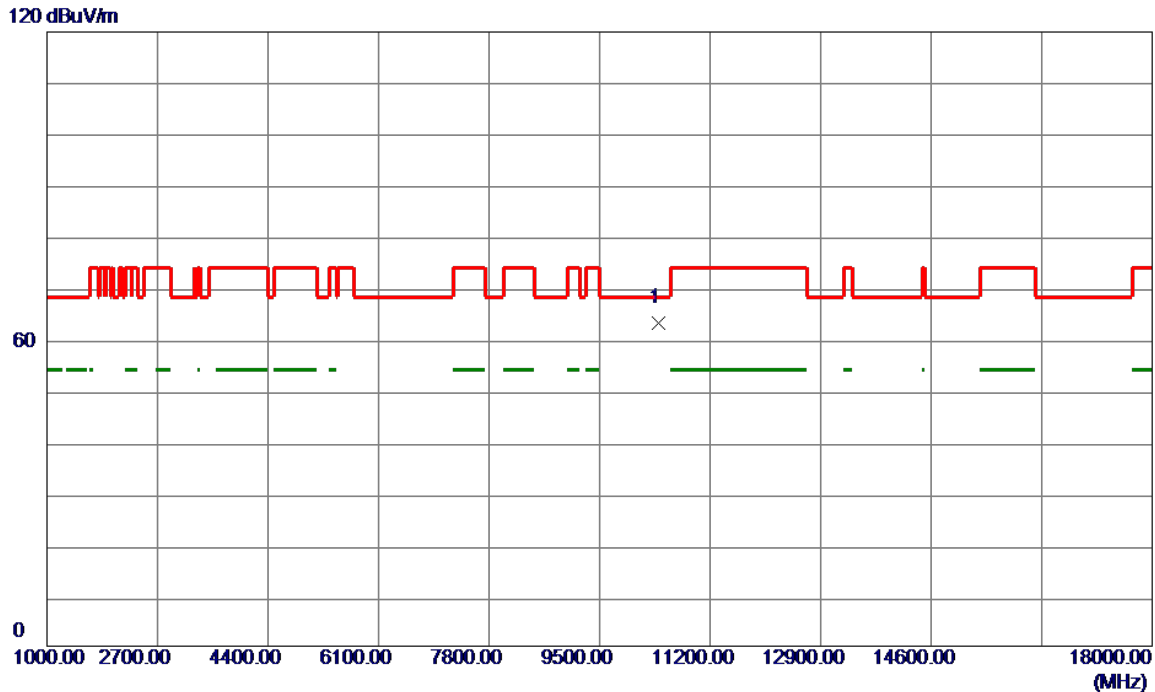


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	55.57	7.67	63.24	68.20	-4.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

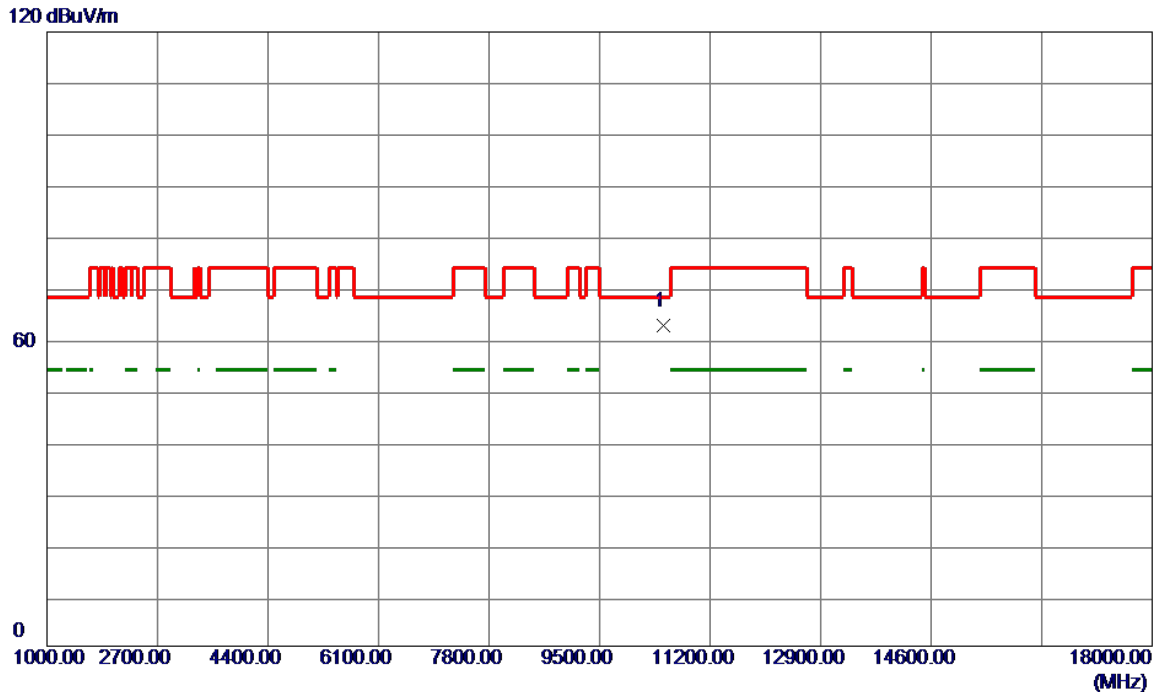


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	54.93	7.70	62.63	68.20	-5.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

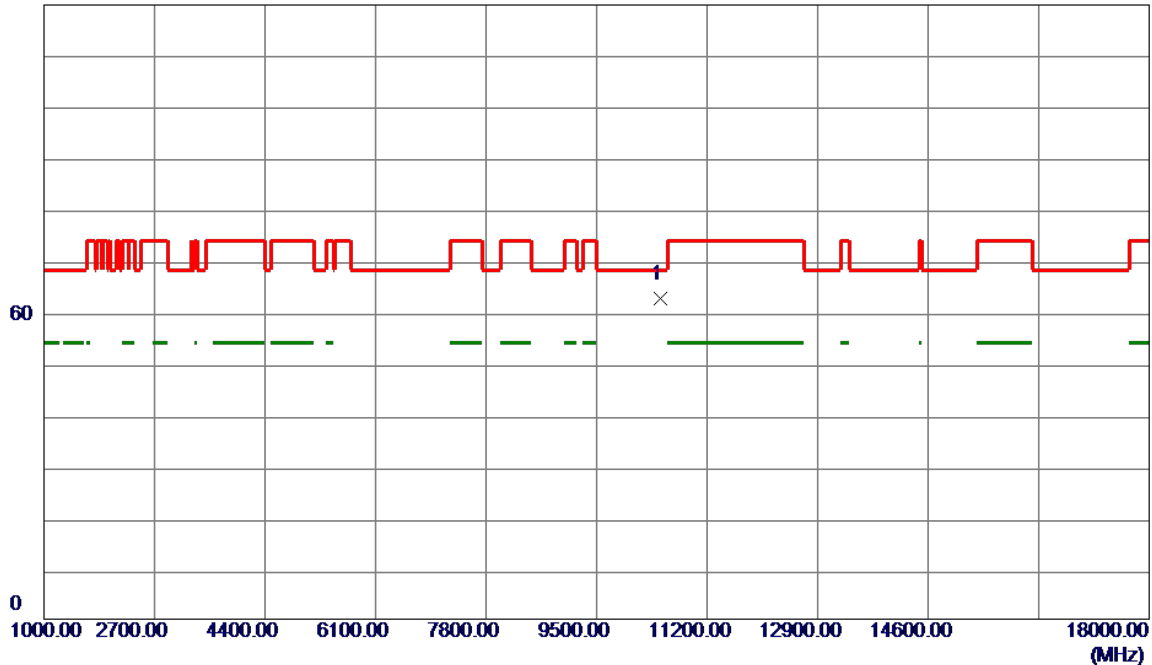


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	54.86	7.70	62.56	68.20	-5.64	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

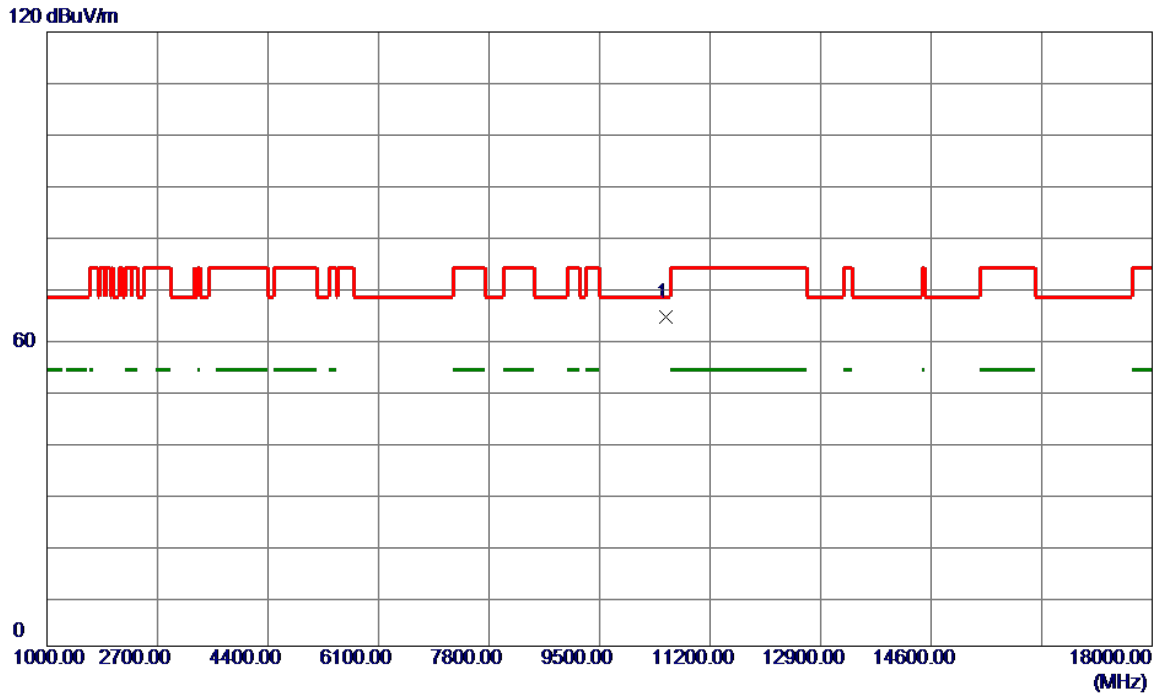


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	56.54	7.72	64.26	68.20	-3.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

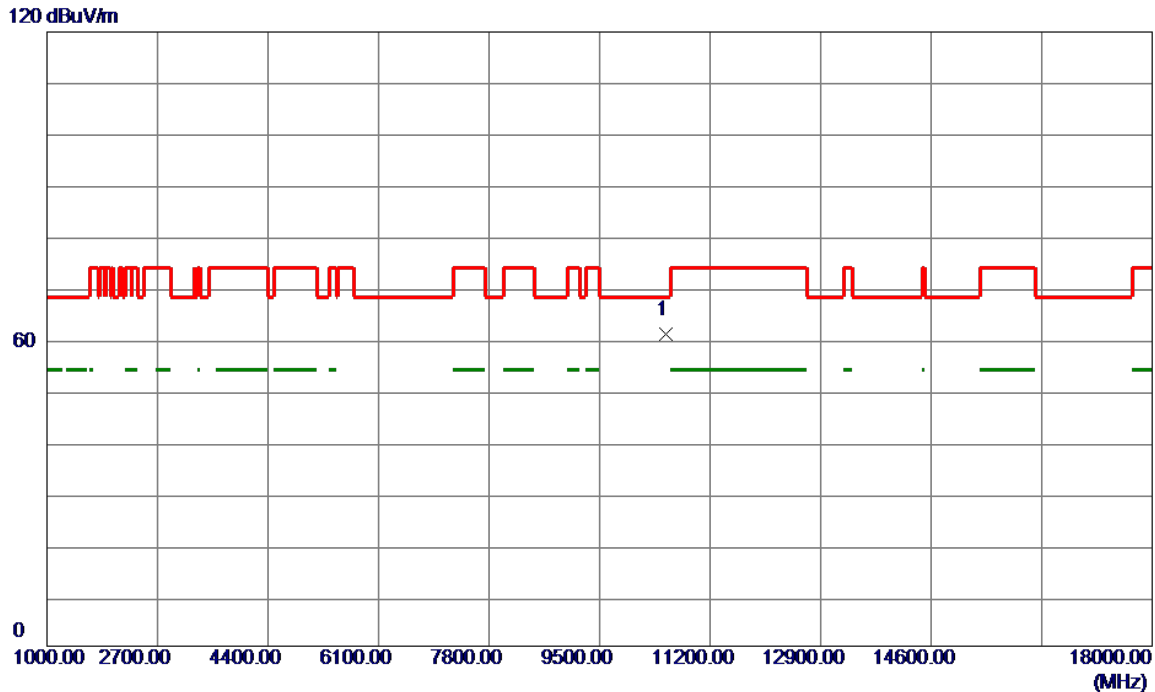


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	53.14	7.72	60.86	68.20	-7.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

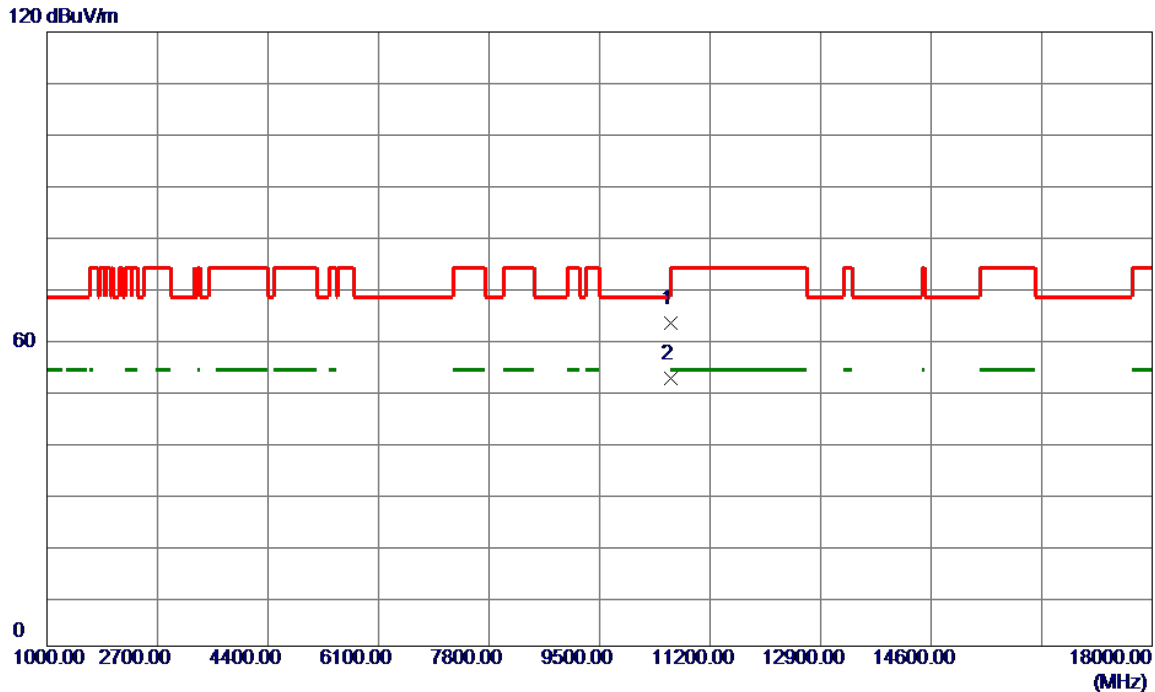


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	55.41	7.78	63.19	68.20	-5.01	Peak	
2	10600.0000	44.53	7.78	52.31	999.00	-946.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5300MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

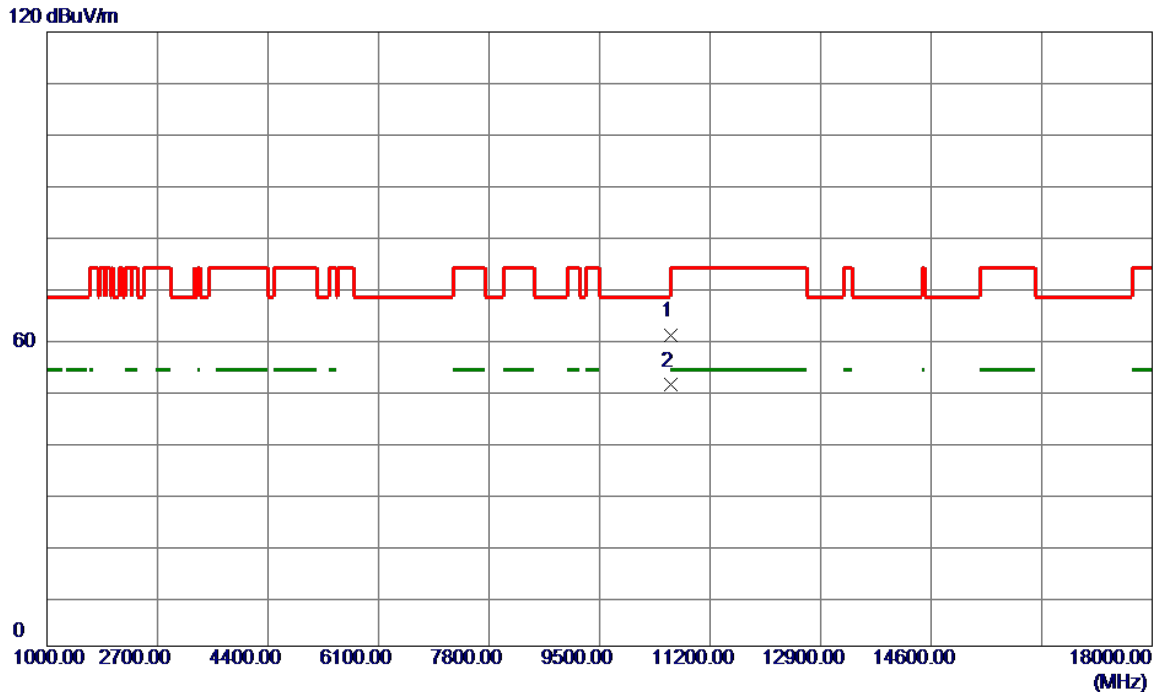


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	52.83	7.78	60.61	68.20	-7.59	Peak	
2	10600.0000	43.22	7.78	51.00	999.00	-948.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

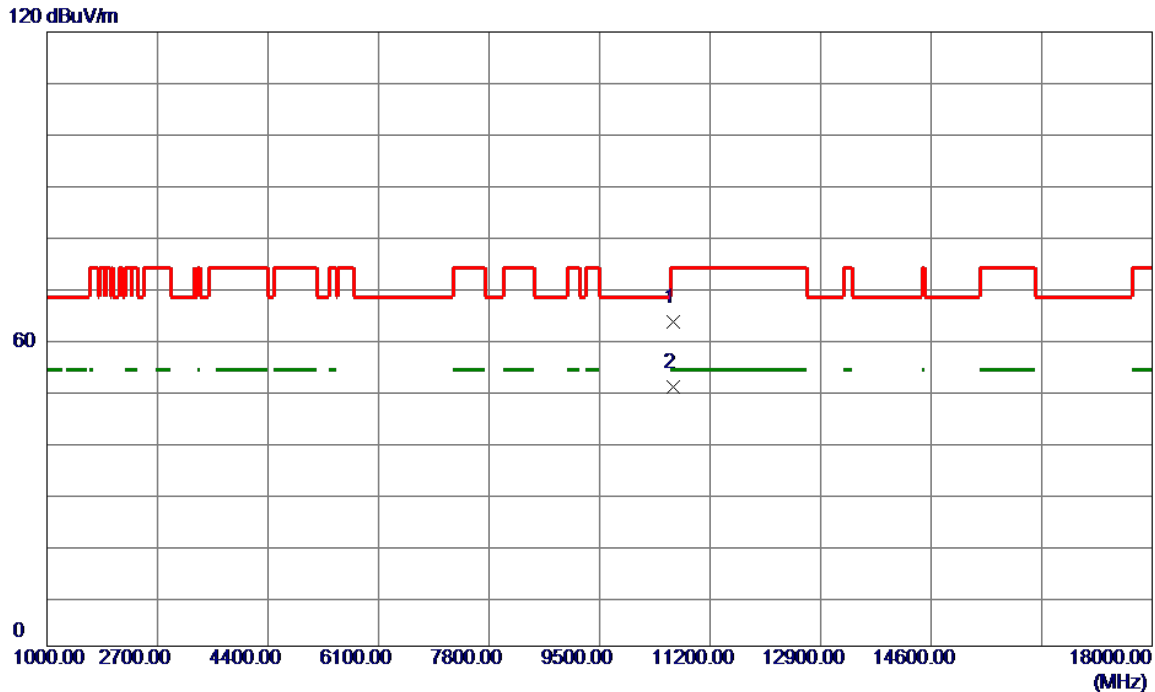


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	55.52	7.81	63.33	74.00	-10.67	Peak	
2 *	10640.0000	42.81	7.81	50.62	54.00	-3.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

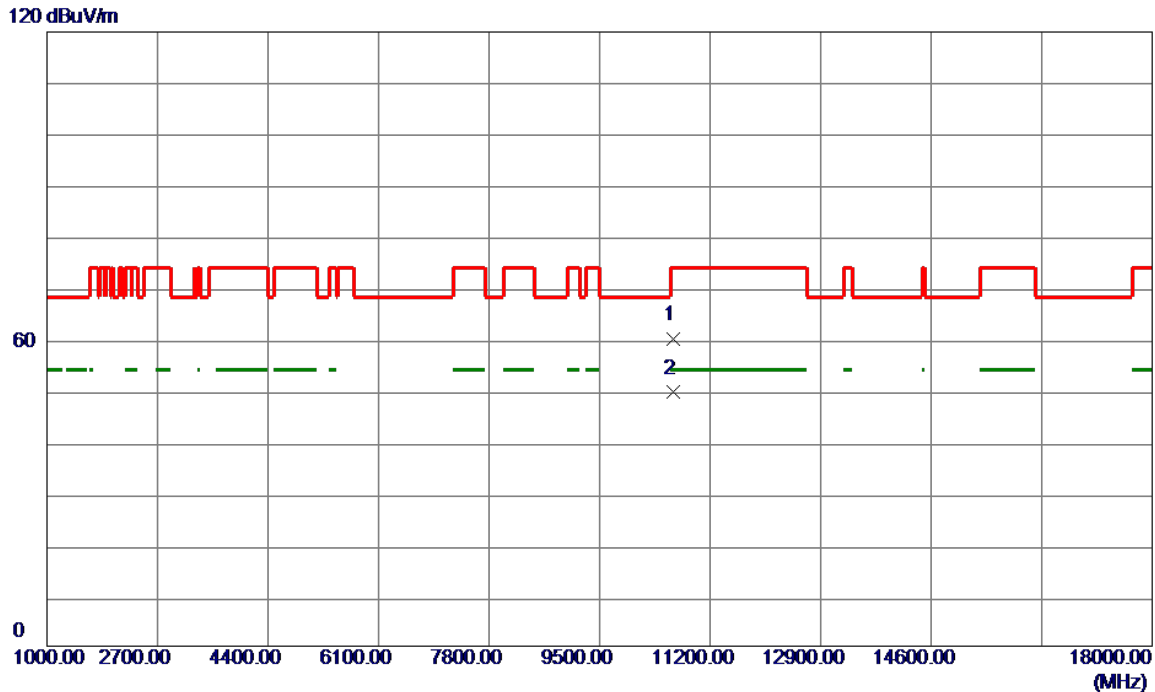


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	52.10	7.81	59.91	74.00	-14.09	Peak	
2 *	10640.0000	41.75	7.81	49.56	54.00	-4.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

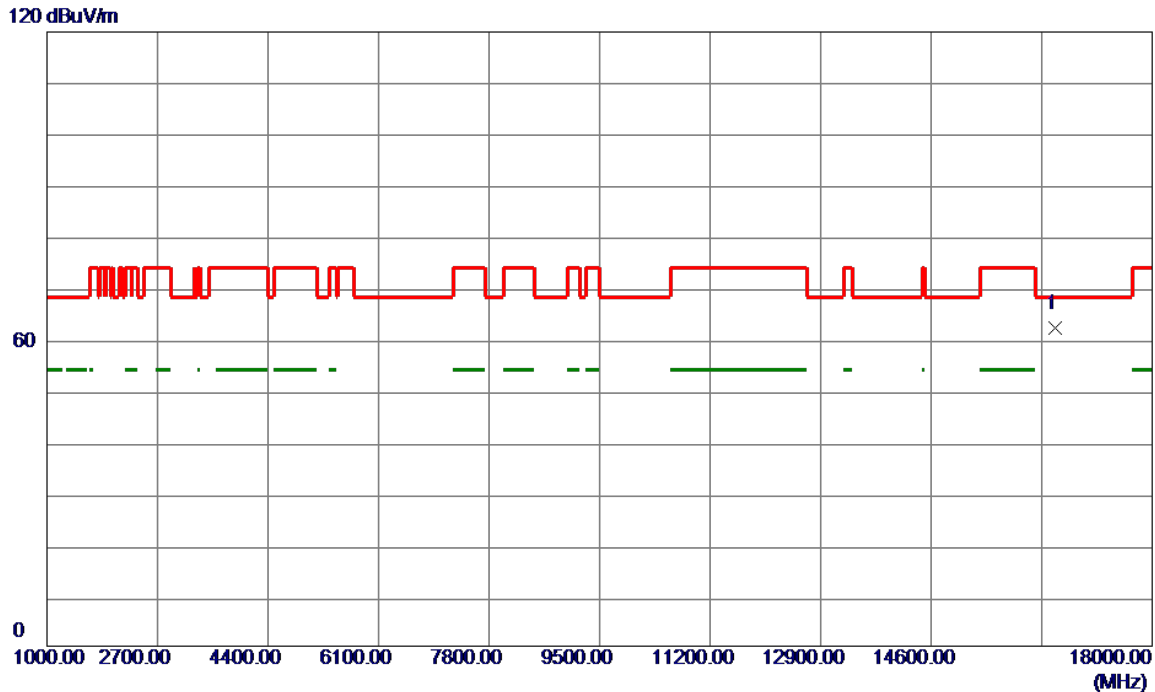


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16500.0000	54.10	7.98	62.08	68.20	-6.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

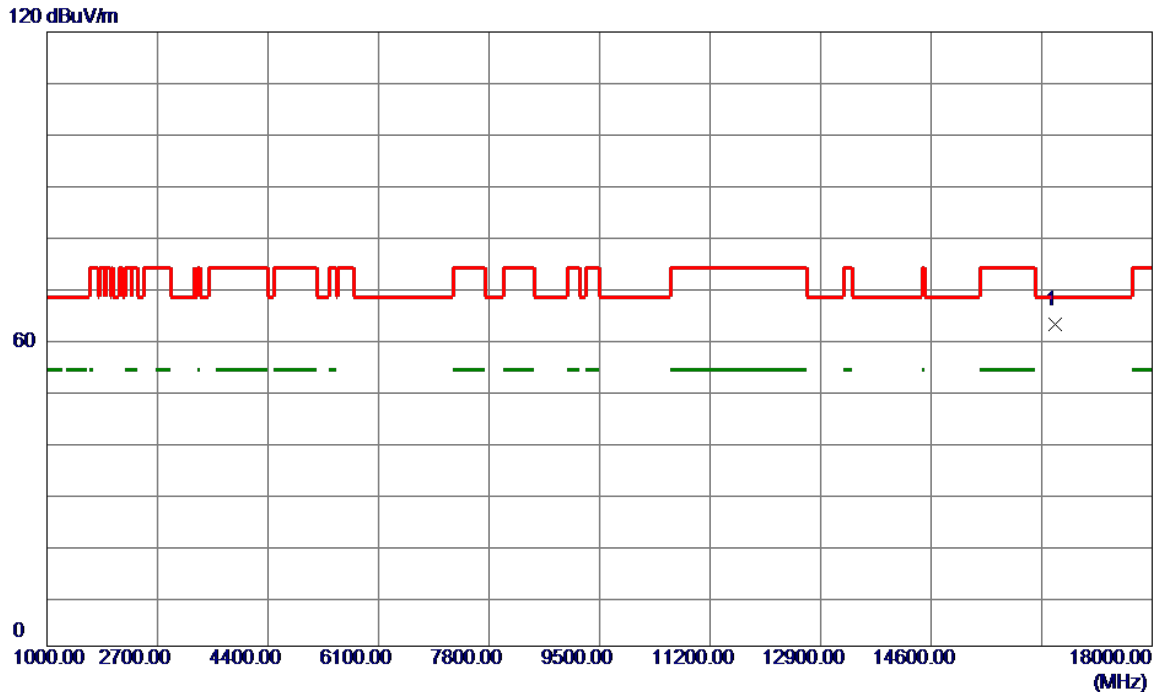


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16500.0000	54.81	7.98	62.79	68.20	-5.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

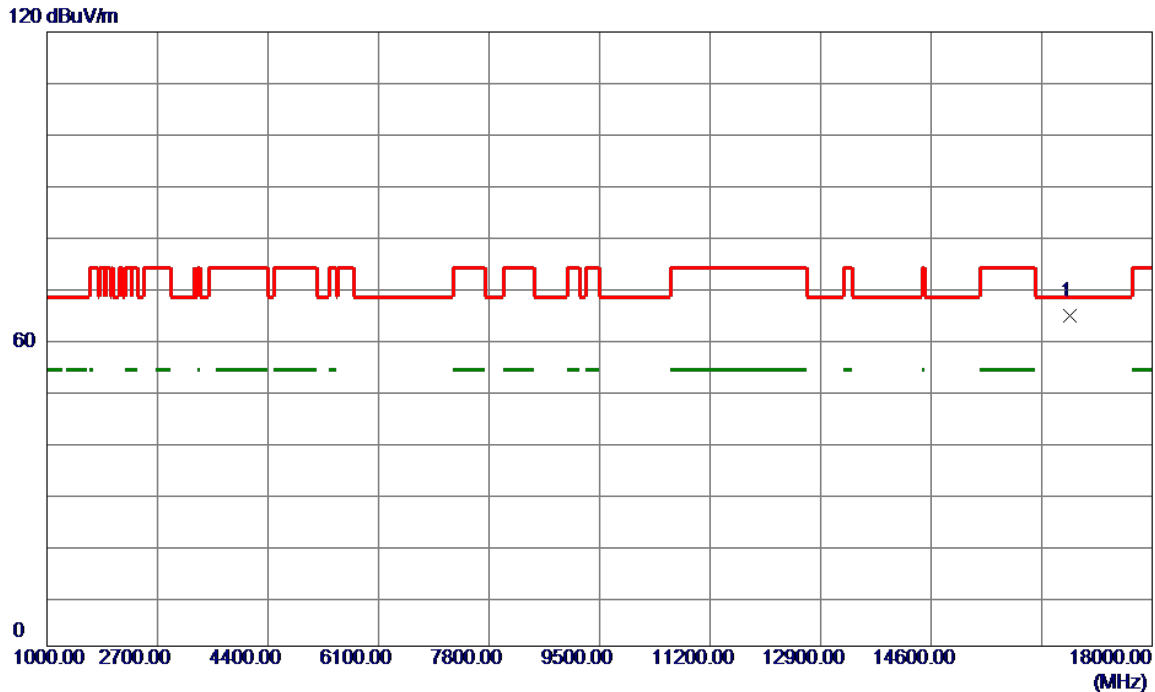


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16740.0000	56.71	7.82	64.53	68.20	-3.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5580MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

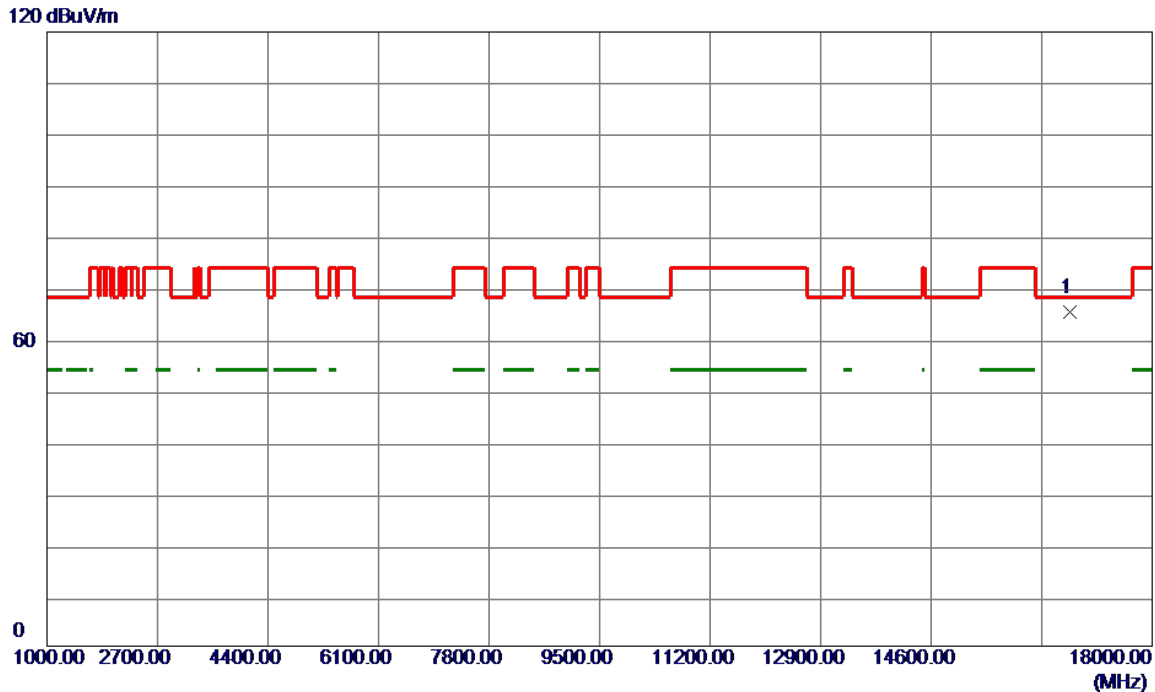


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16740.0000	57.35	7.82	65.17	68.20	-3.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

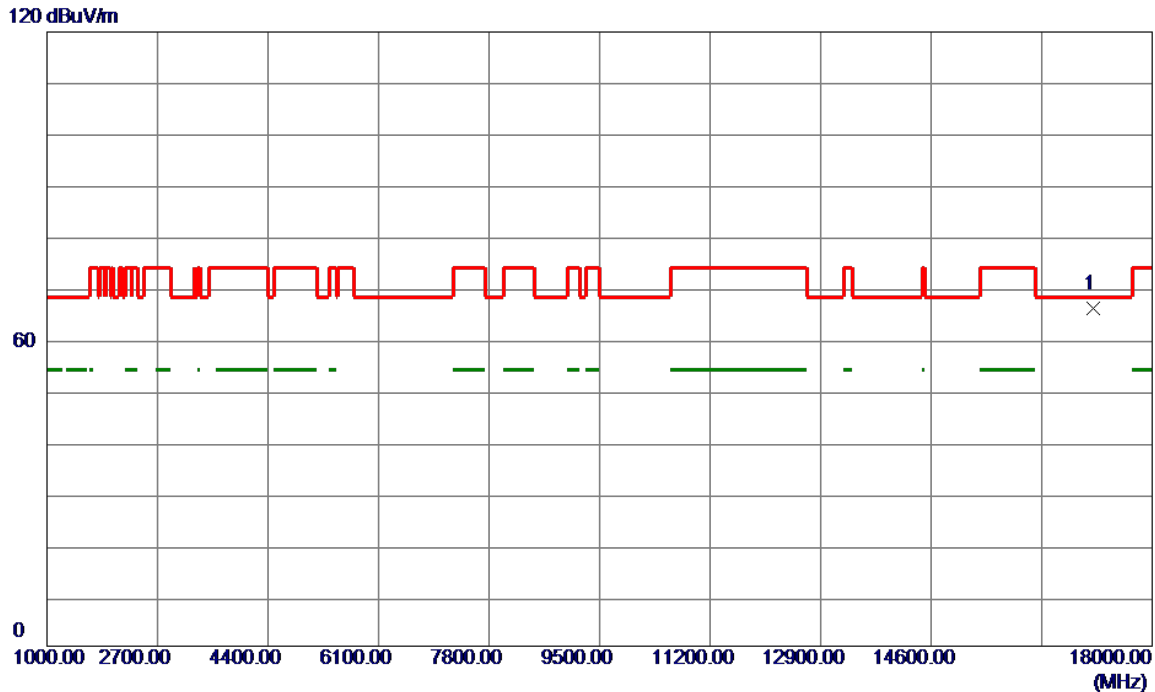


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17100.0000	58.27	7.69	65.96	68.20	-2.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

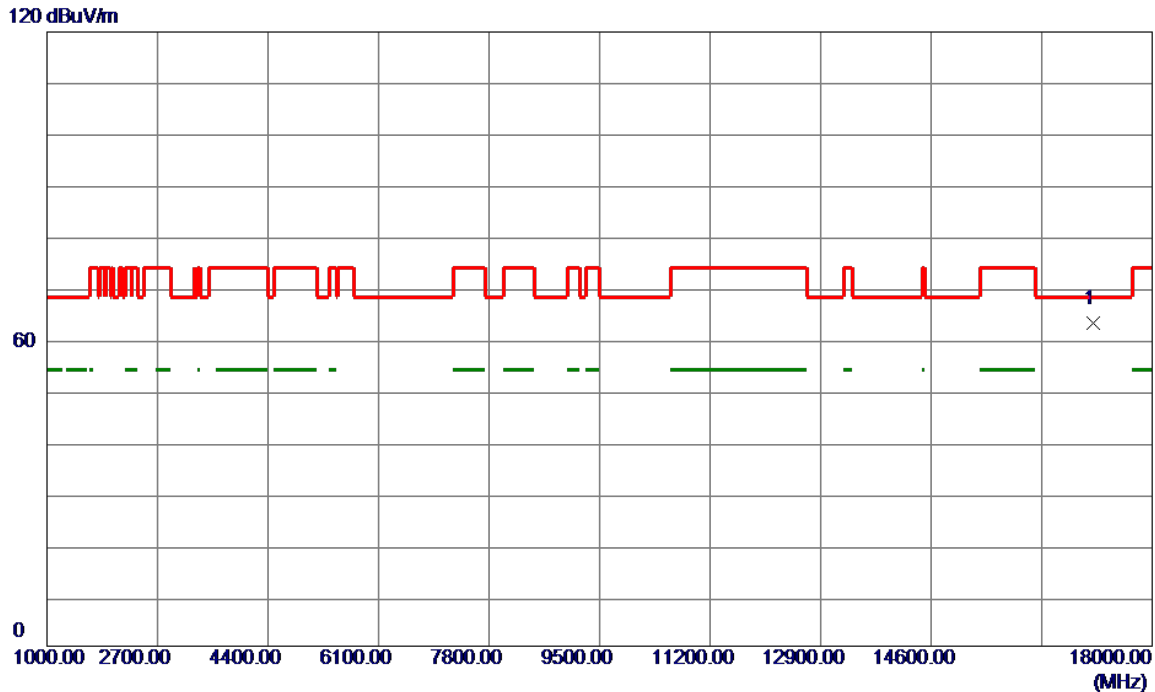


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17100.0000	55.33	7.69	63.02	68.20	-5.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

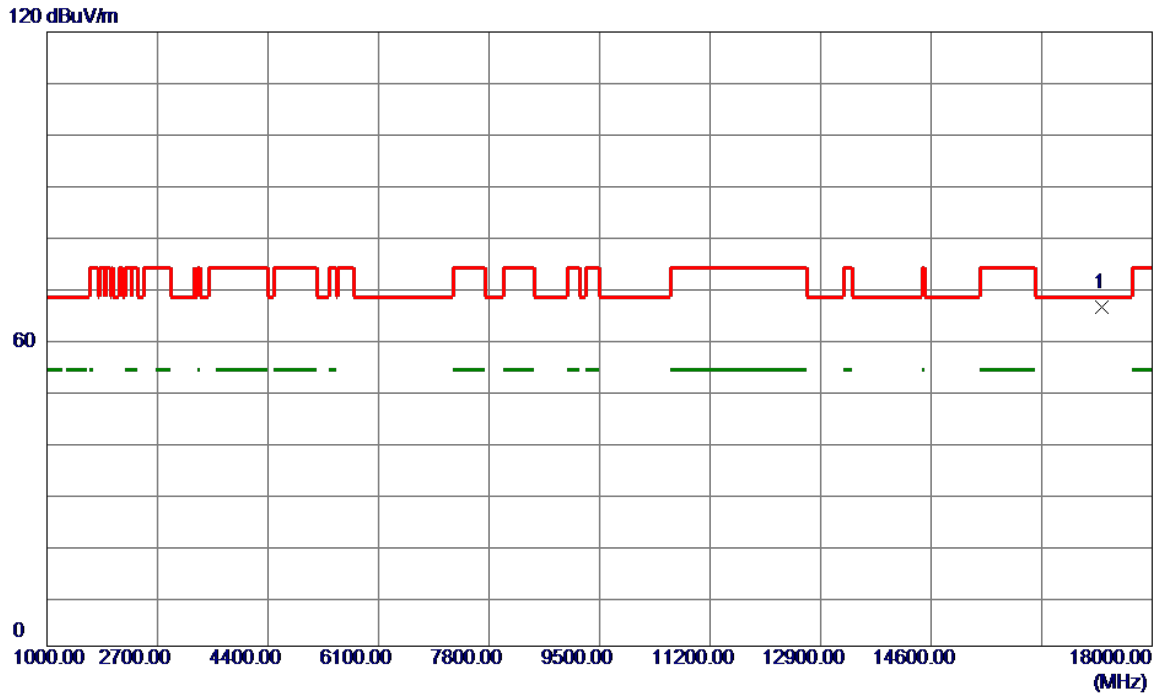


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17235.0000	58.53	7.75	66.28	68.20	-1.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

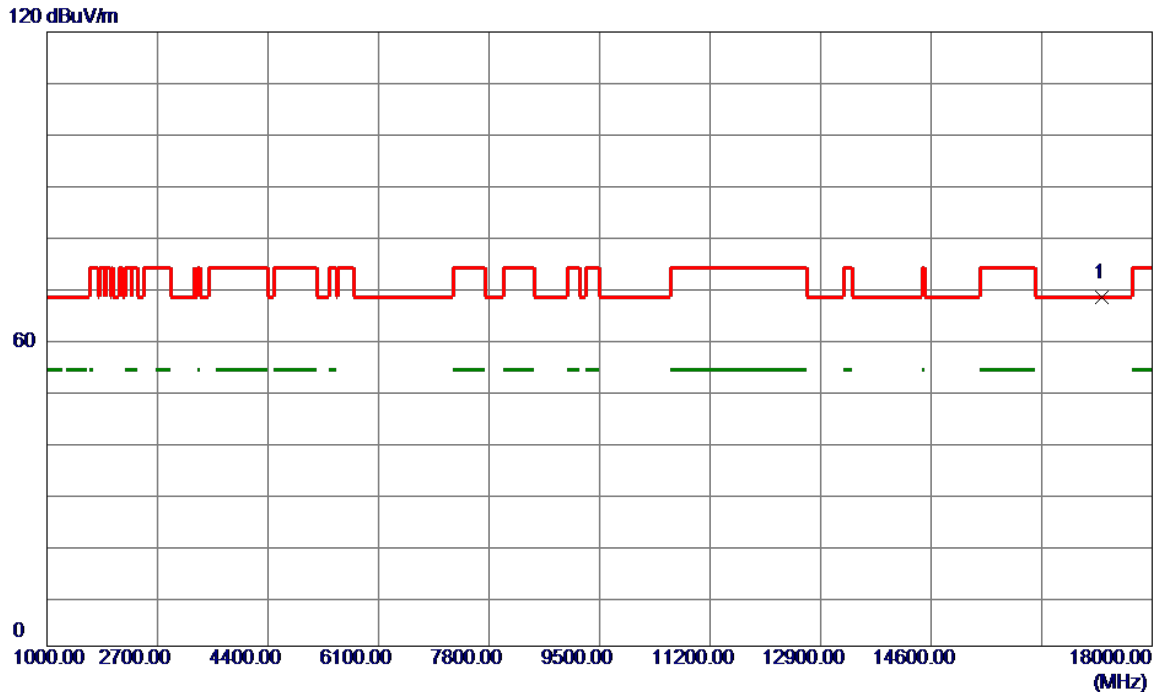


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17235.0000	60.33	7.75	68.08	68.20	-0.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

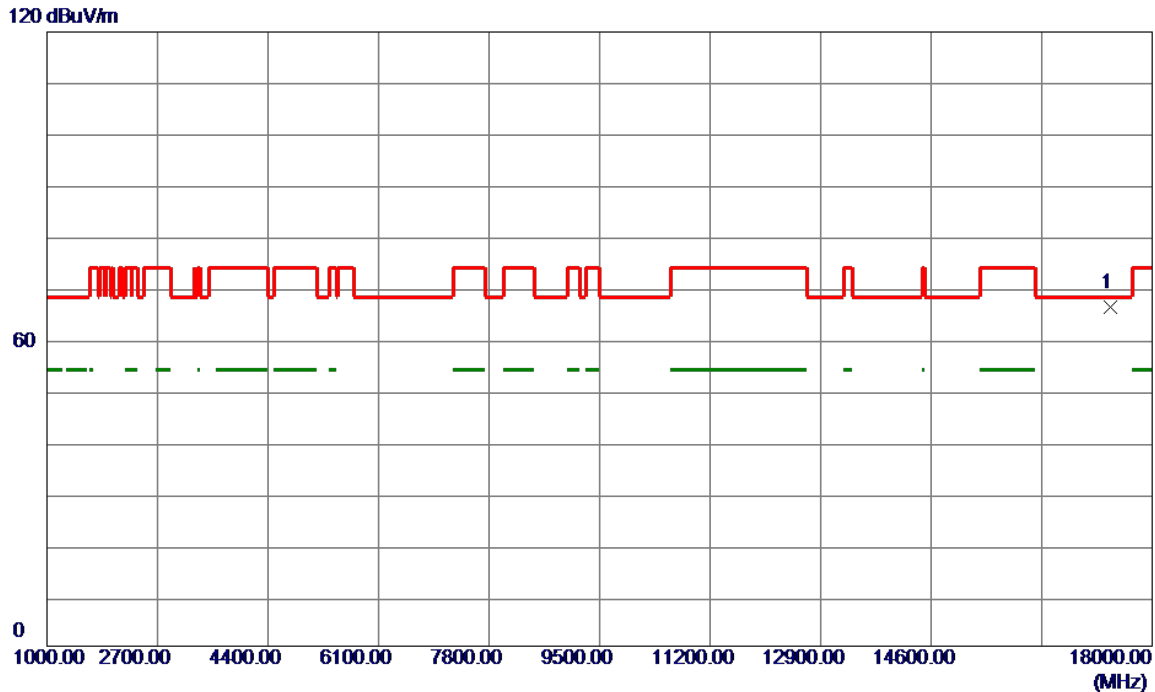


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17355.0000	58.49	7.80	66.29	68.20	-1.91	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

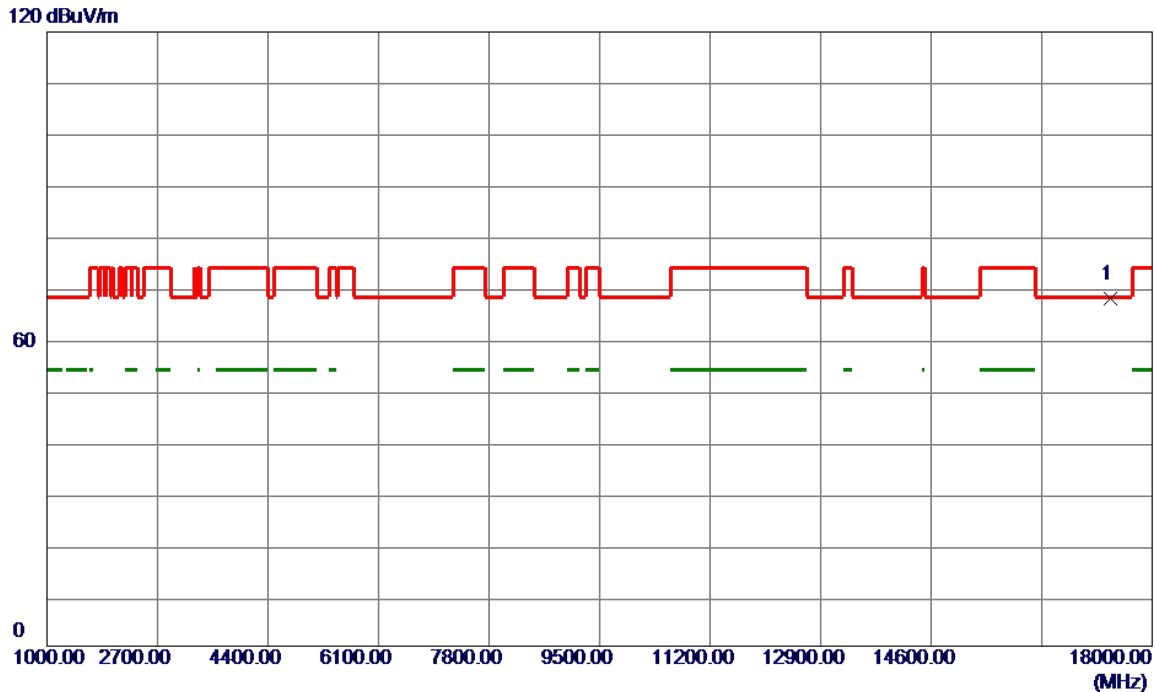


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17355.0000	60.20	7.80	68.00	68.20	-0.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

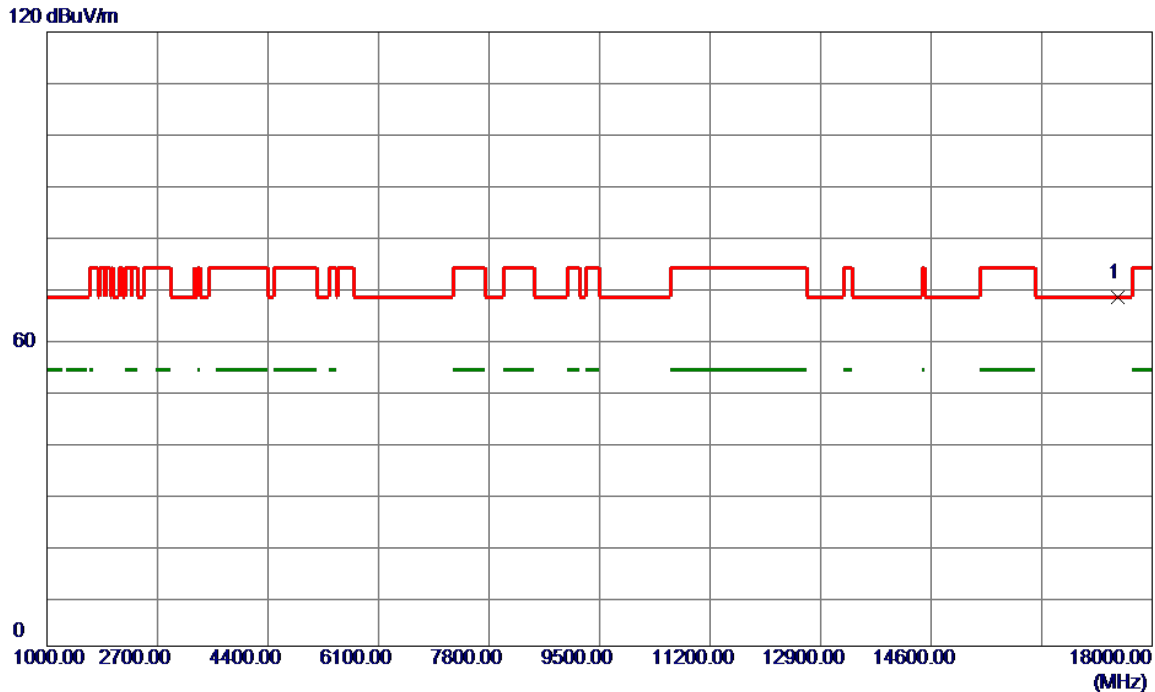


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17475.0000	60.19	7.86	68.05	68.20	-0.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/6/2
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

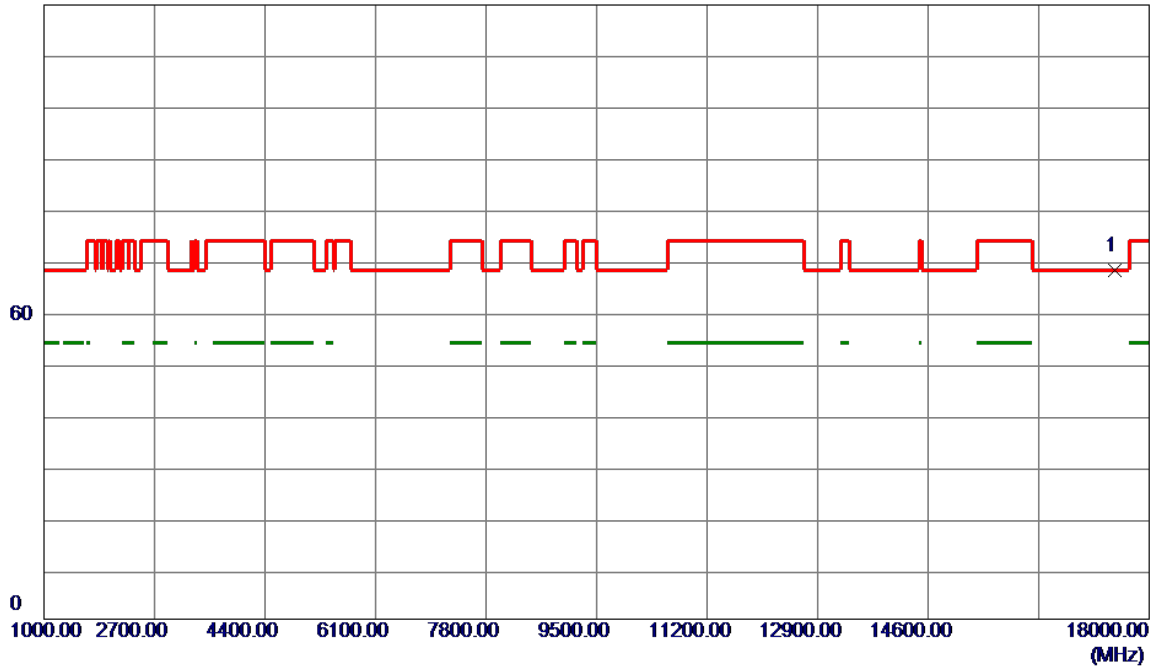


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17475.0000	60.29	7.86	68.15	68.20	-0.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

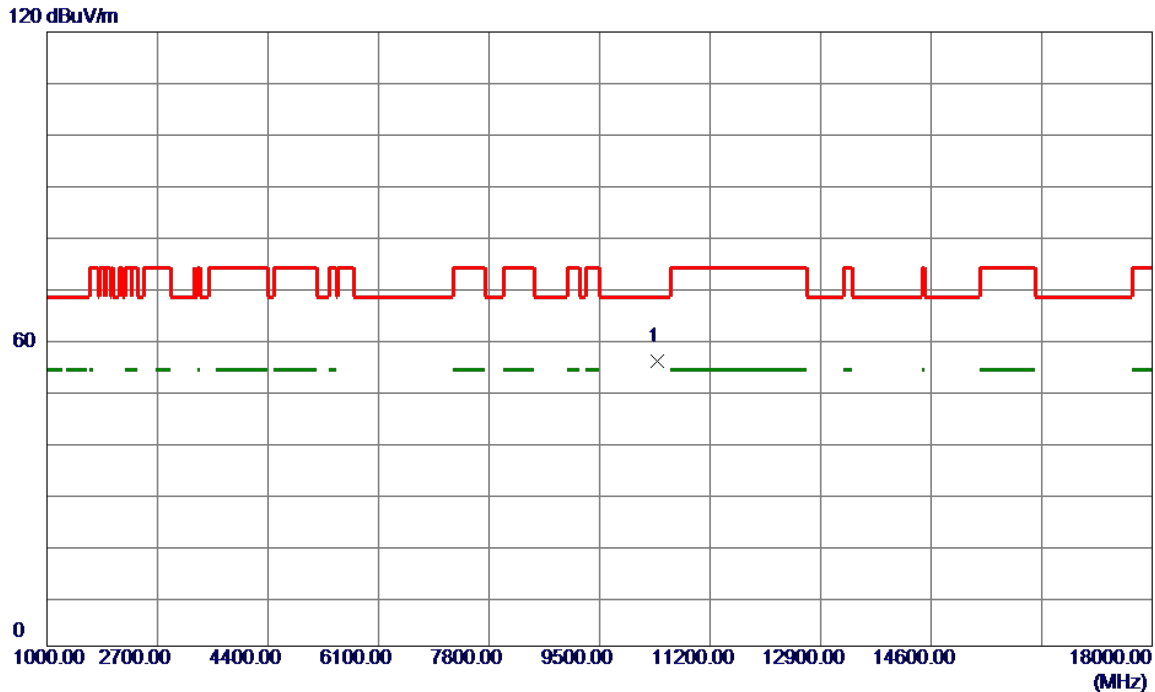


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	47.92	7.66	55.58	68.20	-12.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

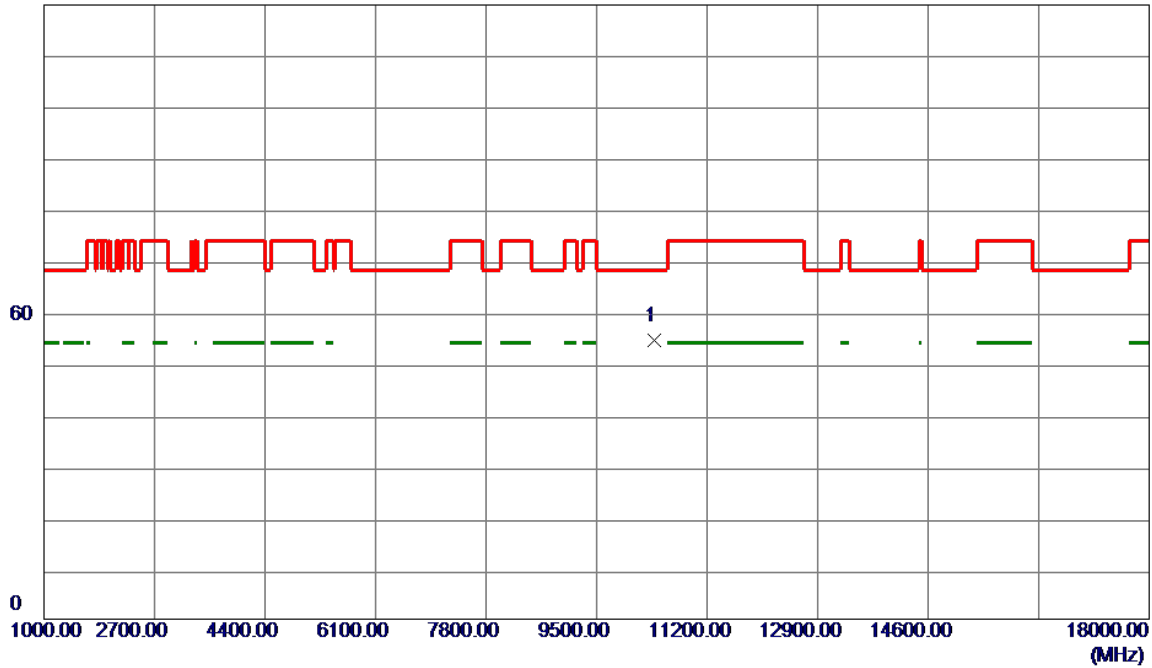


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	46.86	7.66	54.52	68.20	-13.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

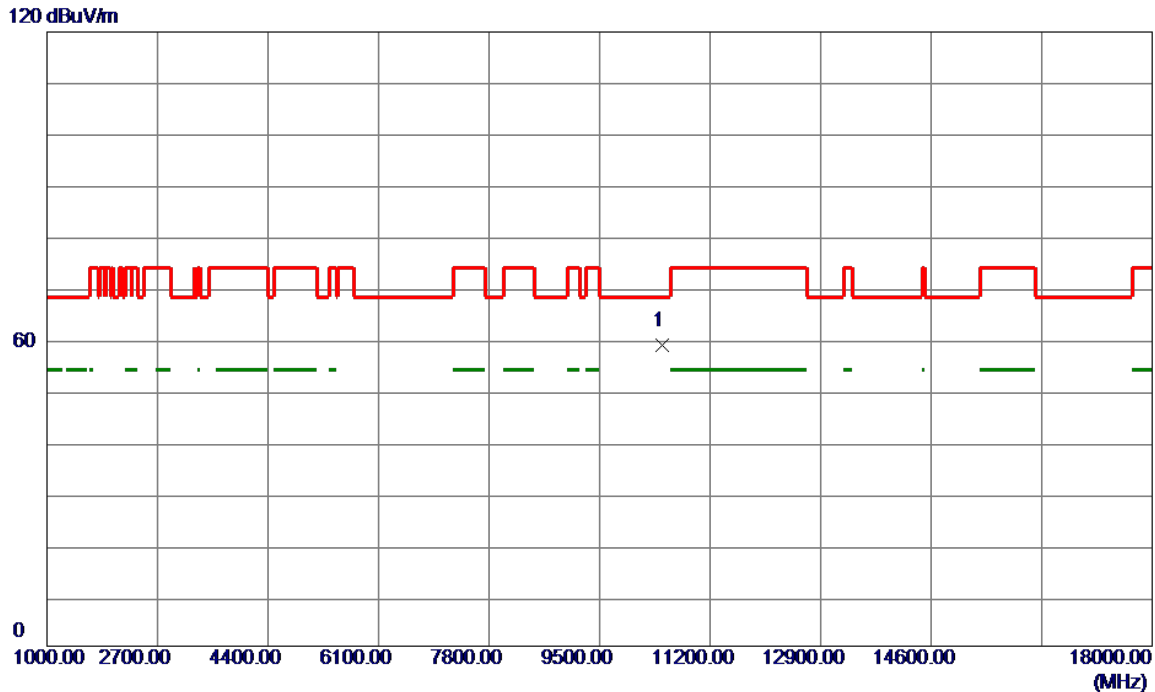


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10460.0000	51.05	7.69	58.74	68.20	-9.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

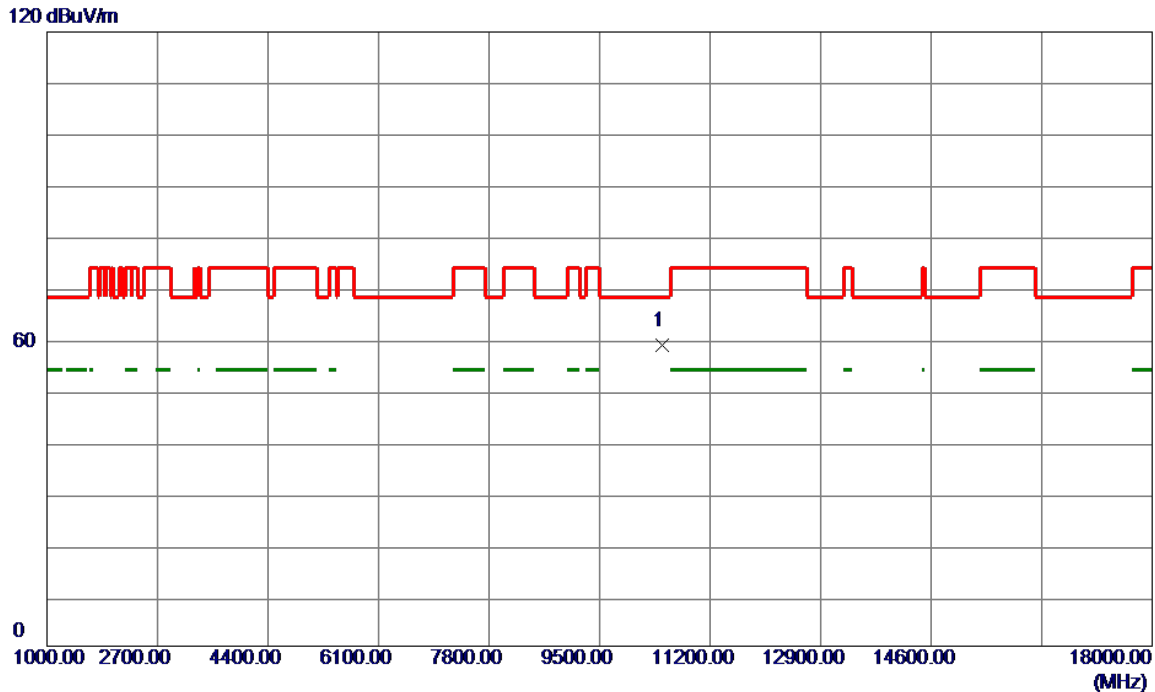


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10460.0000	51.05	7.69	58.74	68.20	-9.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

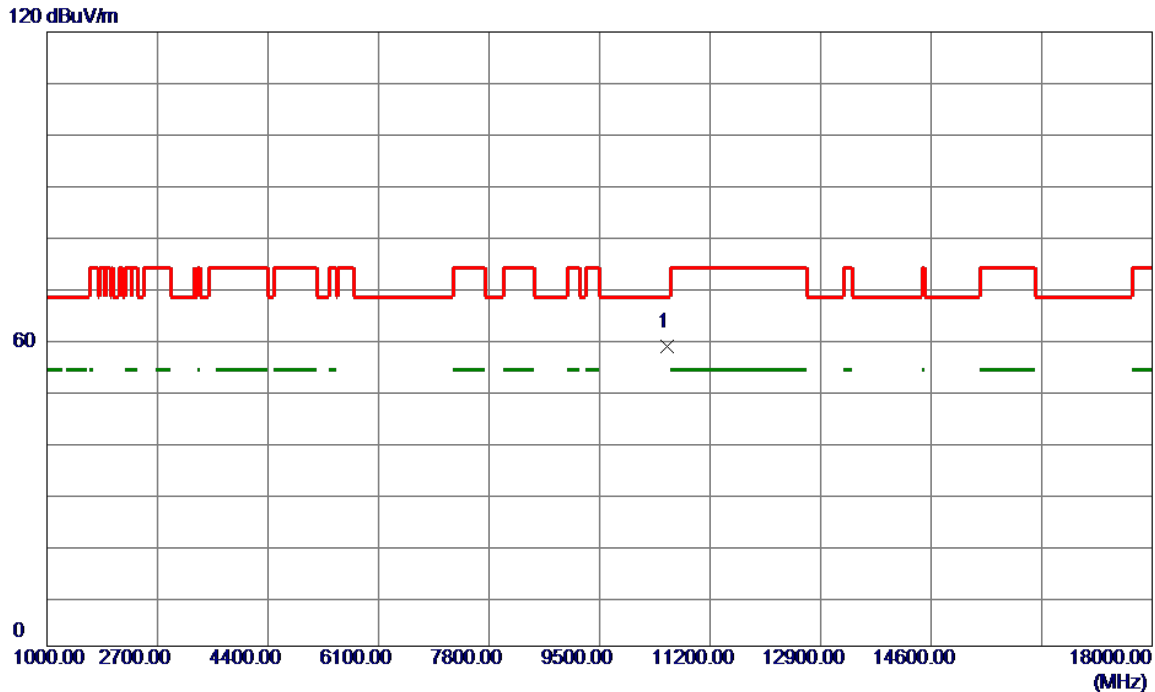


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	50.71	7.74	58.45	68.20	-9.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

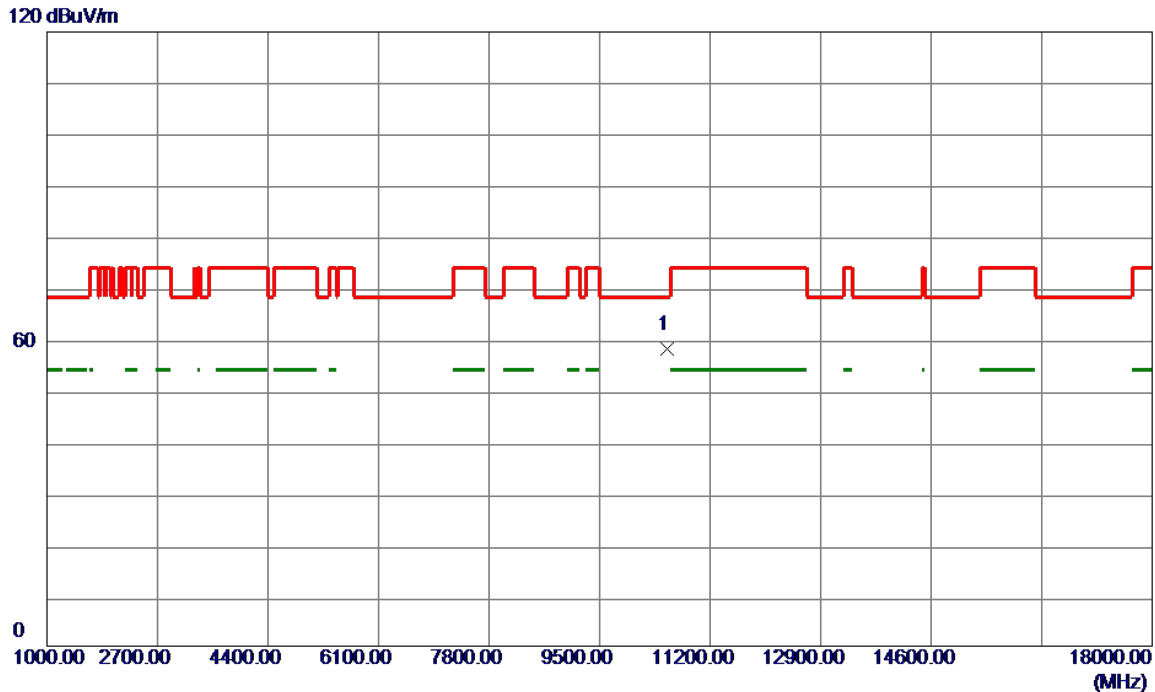


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	50.24	7.74	57.98	68.20	-10.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

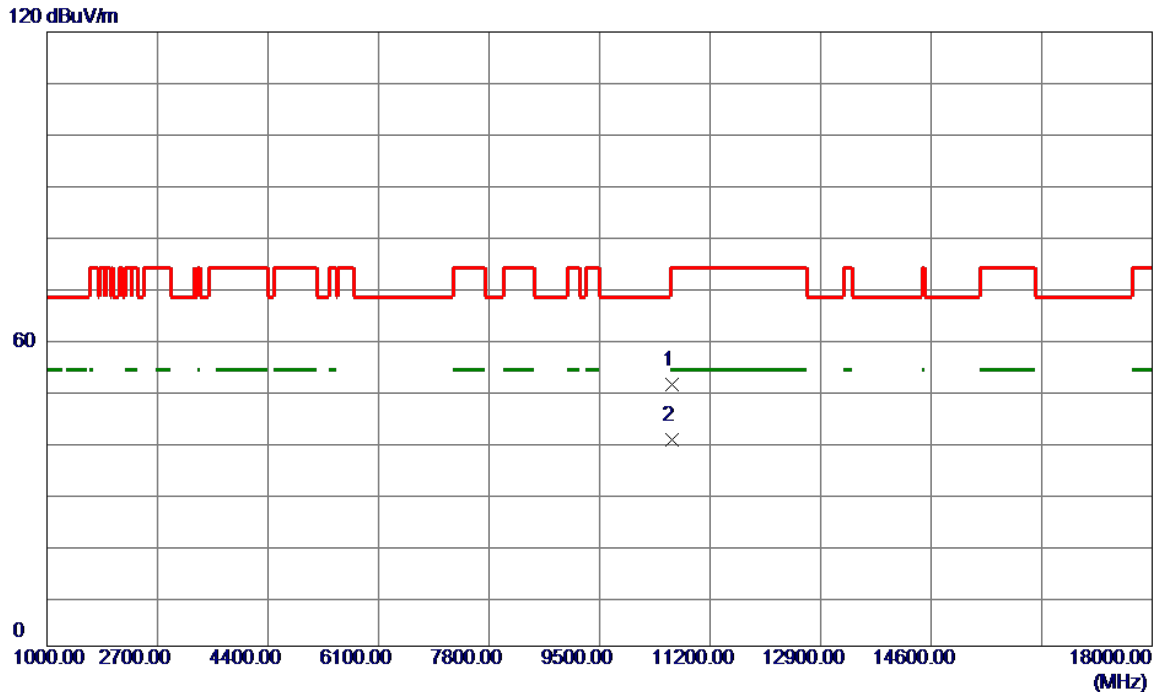


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	43.34	7.79	51.13	74.00	-22.87	Peak	
2 *	10620.0000	32.58	7.79	40.37	54.00	-13.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

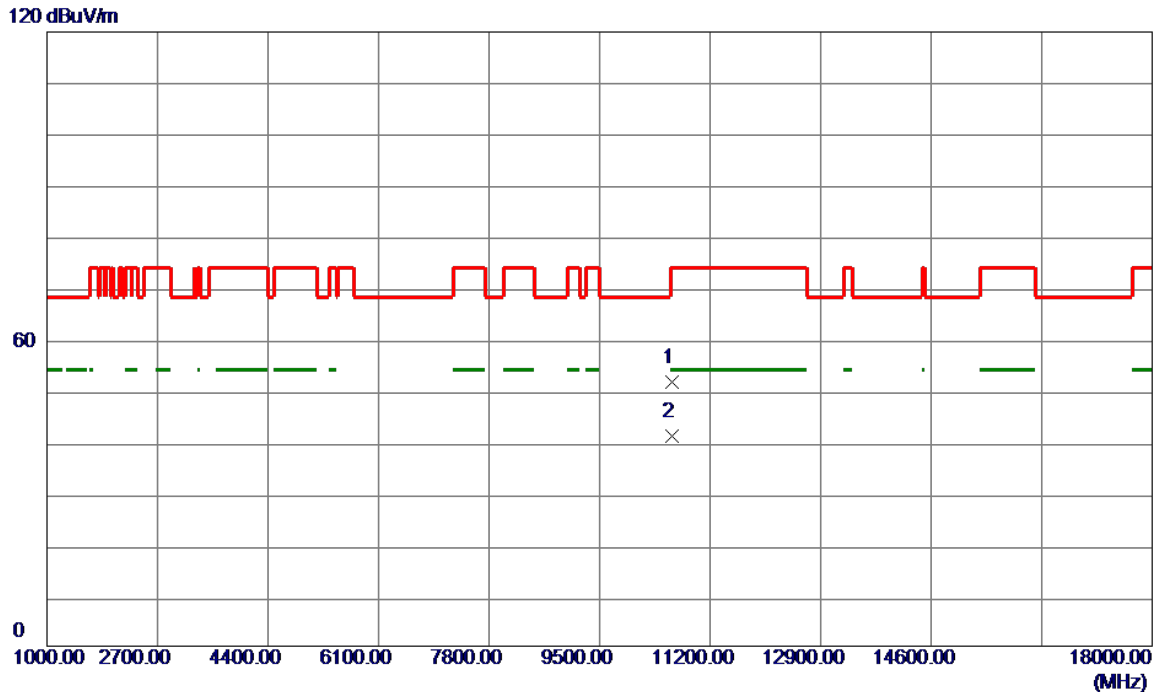


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	43.87	7.79	51.66	74.00	-22.34	Peak	
2 *	10620.0000	33.27	7.79	41.06	54.00	-12.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

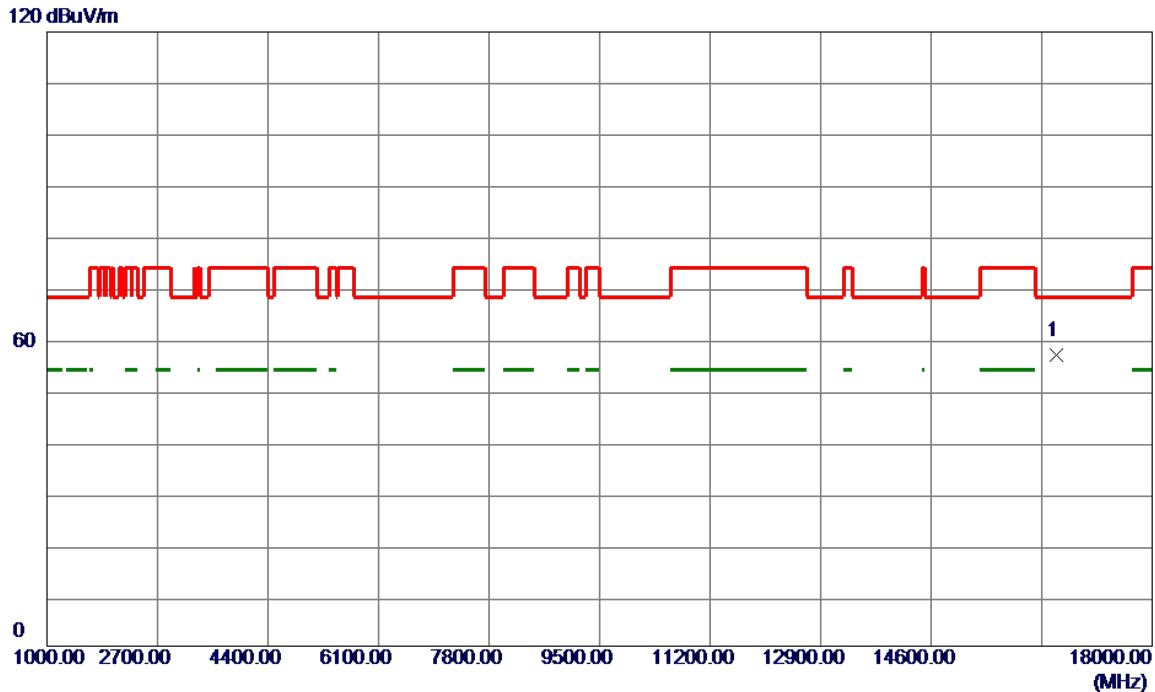


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16530.0000	48.92	7.96	56.88	68.20	-11.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

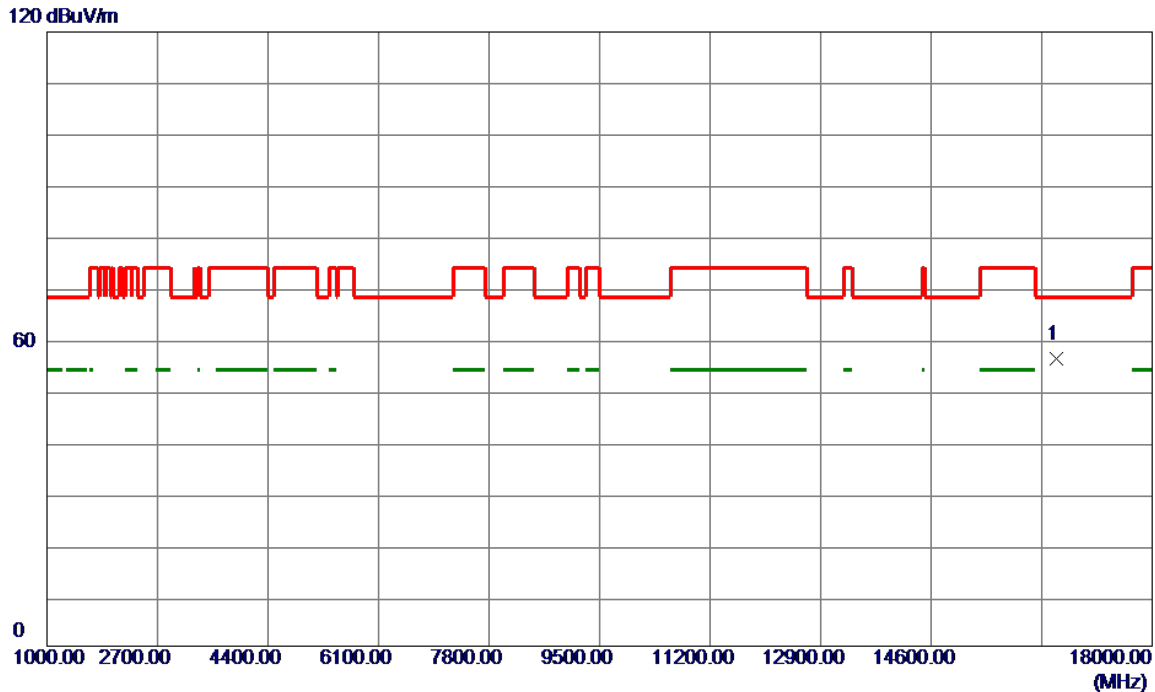


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	16530.0000	48.29	7.96	56.25	68.20	-11.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/12
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

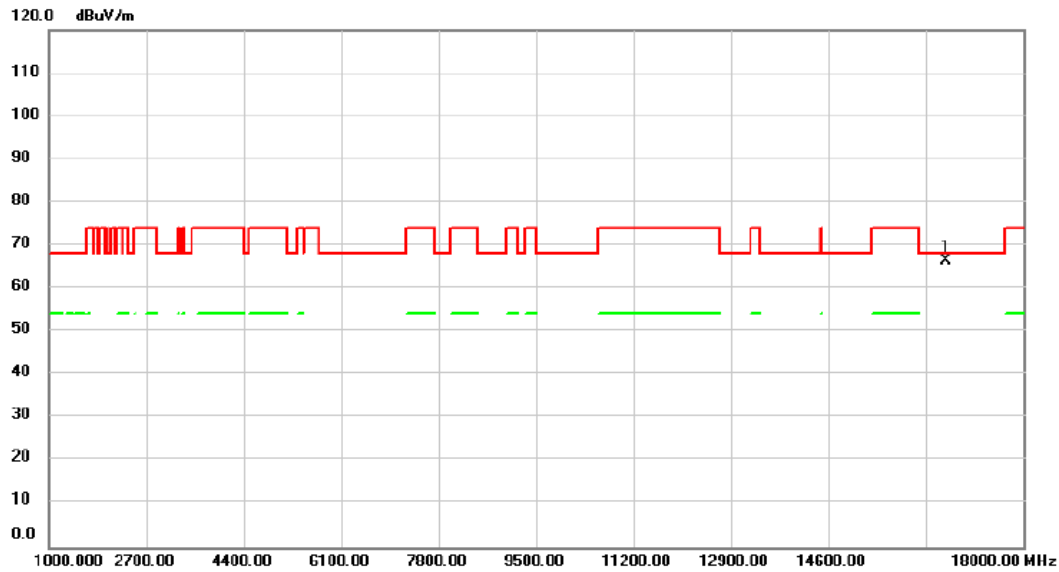


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	16650.00	58.54	7.88	66.42	68.20	-1.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/12
Test Frequency	5550MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

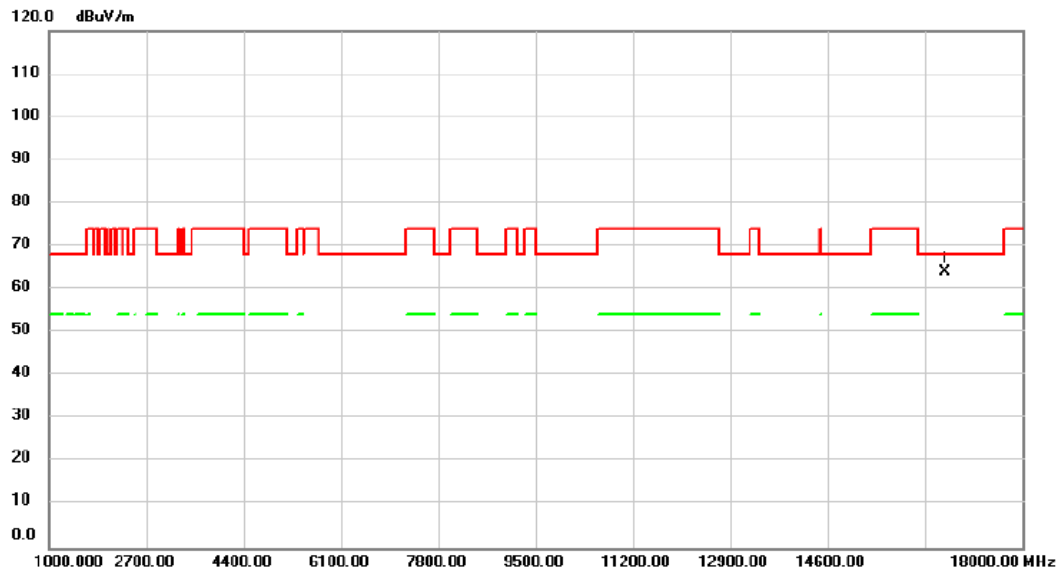


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	16650.00	56.30	7.88	64.18	68.20	-4.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

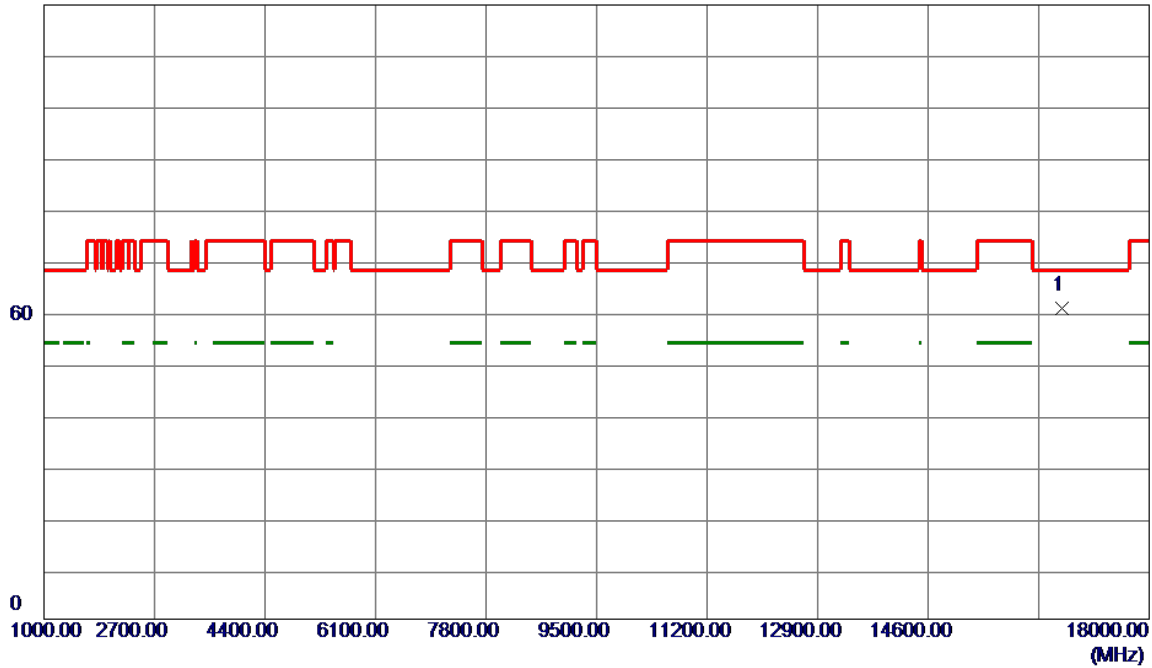


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16650.0000	52.72	7.88	60.60	68.20	-7.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

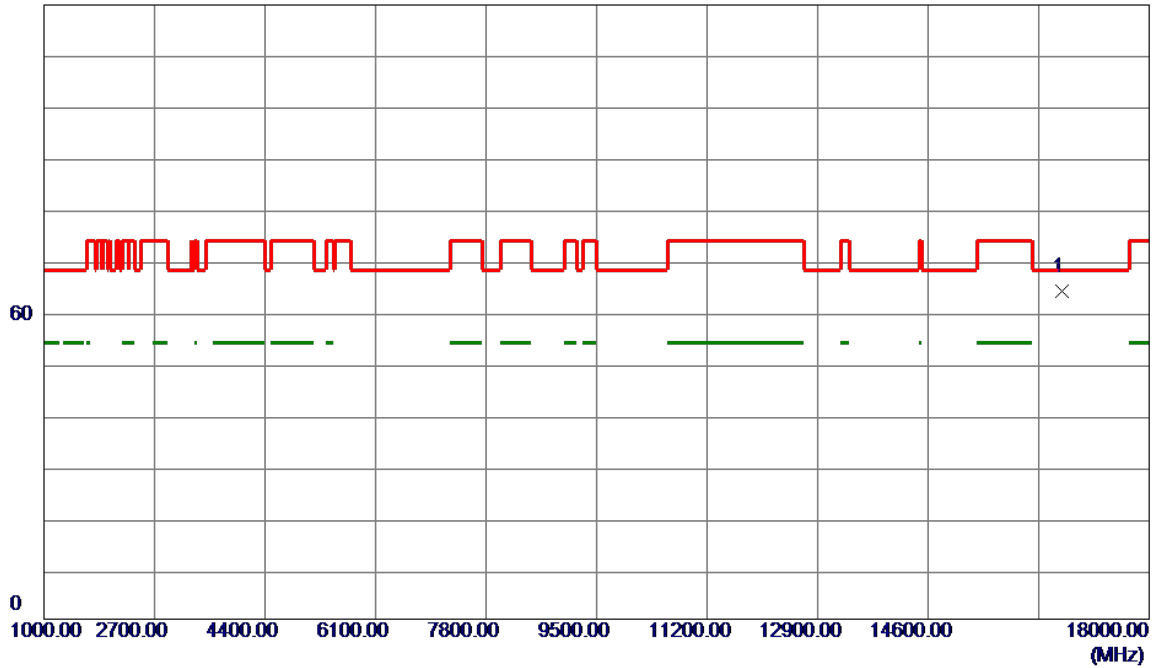


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16650.0000	56.30	7.88	64.18	68.20	-4.02	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

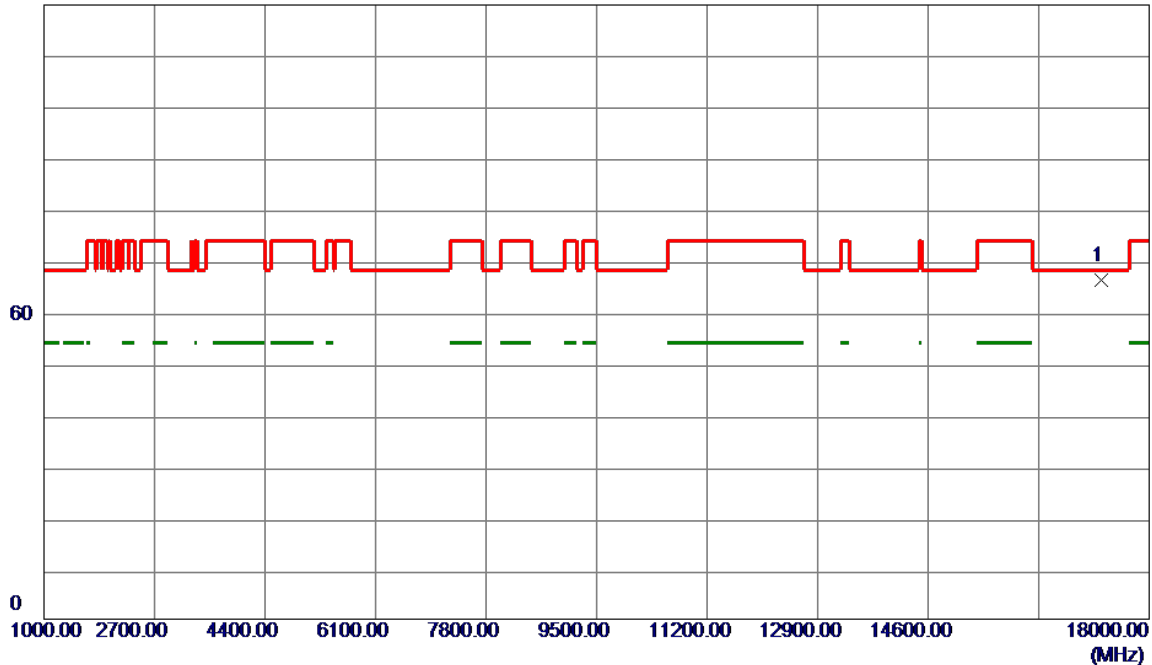


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17265.0000	58.58	7.76	66.34	68.20	-1.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

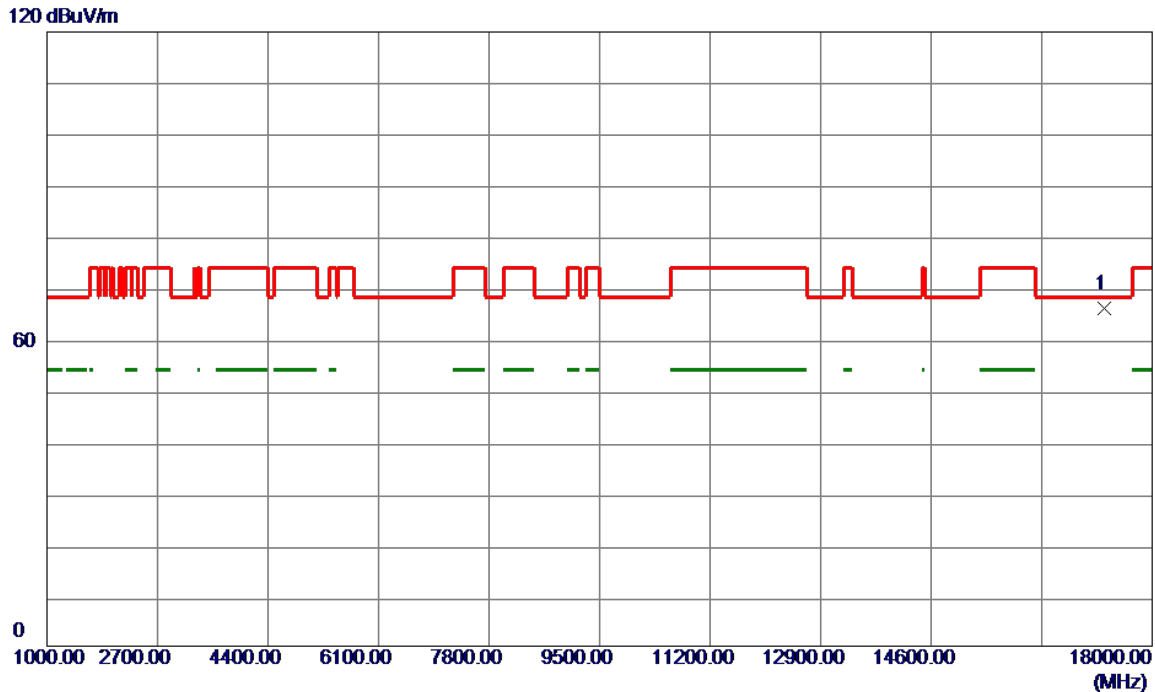


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17265.0000	58.24	7.76	66.00	68.20	-2.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

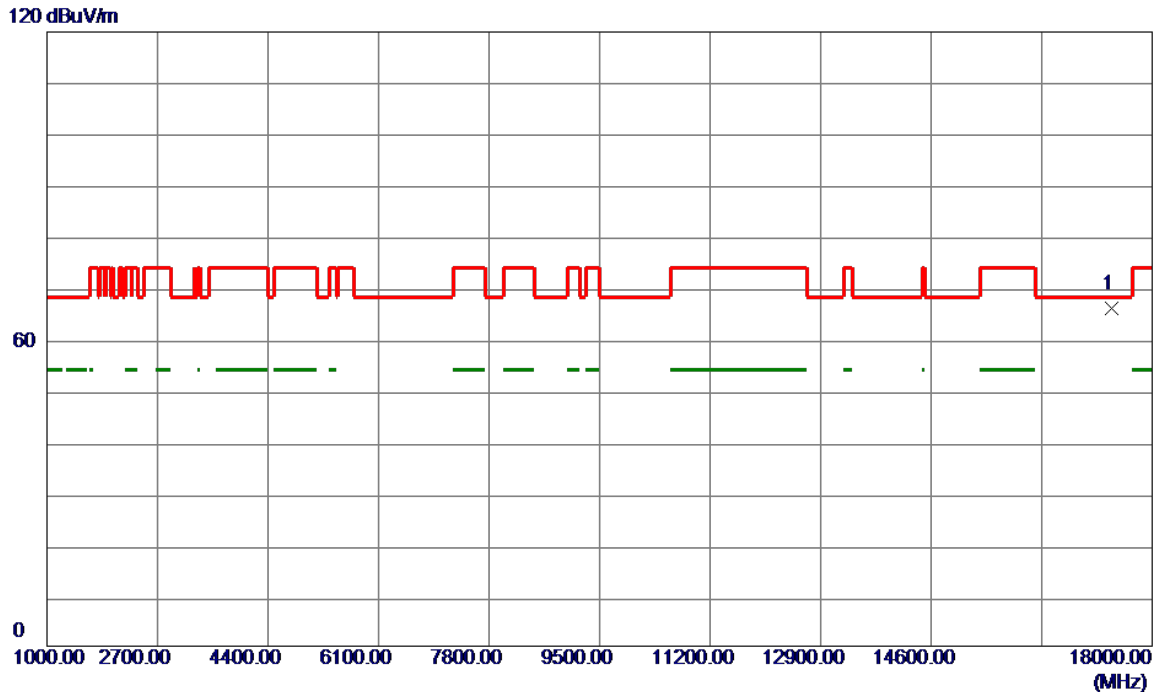


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17385.0000	58.08	7.82	65.90	68.20	-2.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/6/2
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

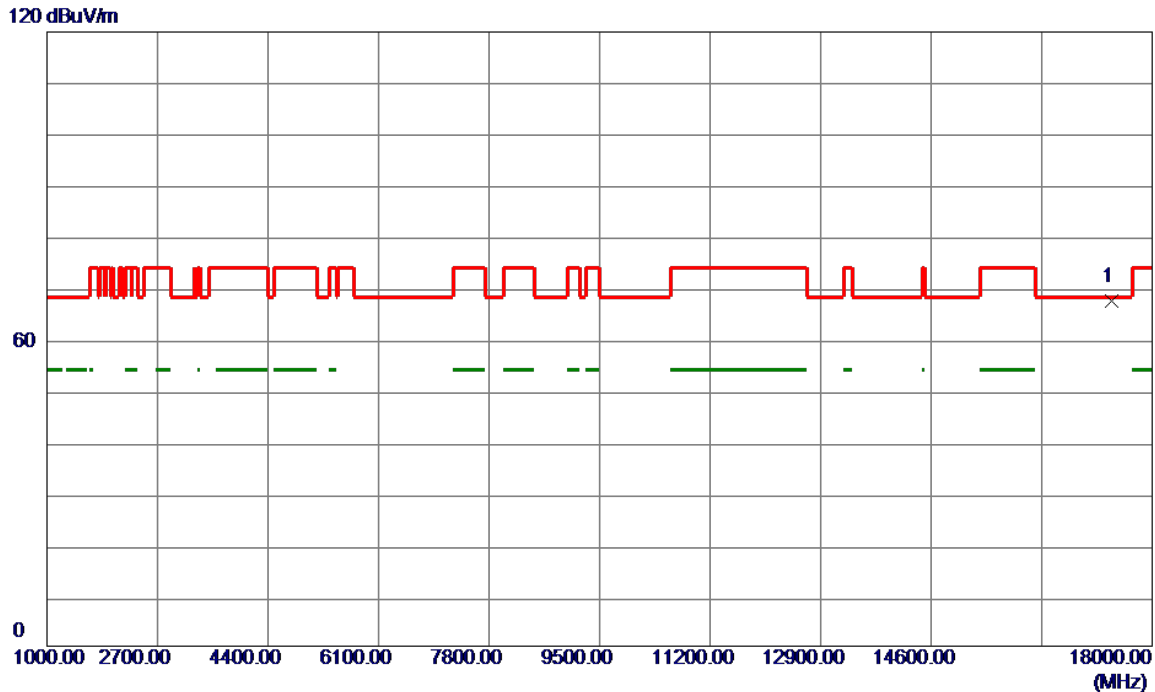


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17385.0000	59.59	7.82	67.41	68.20	-0.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/6/2
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

120 dBuV/m

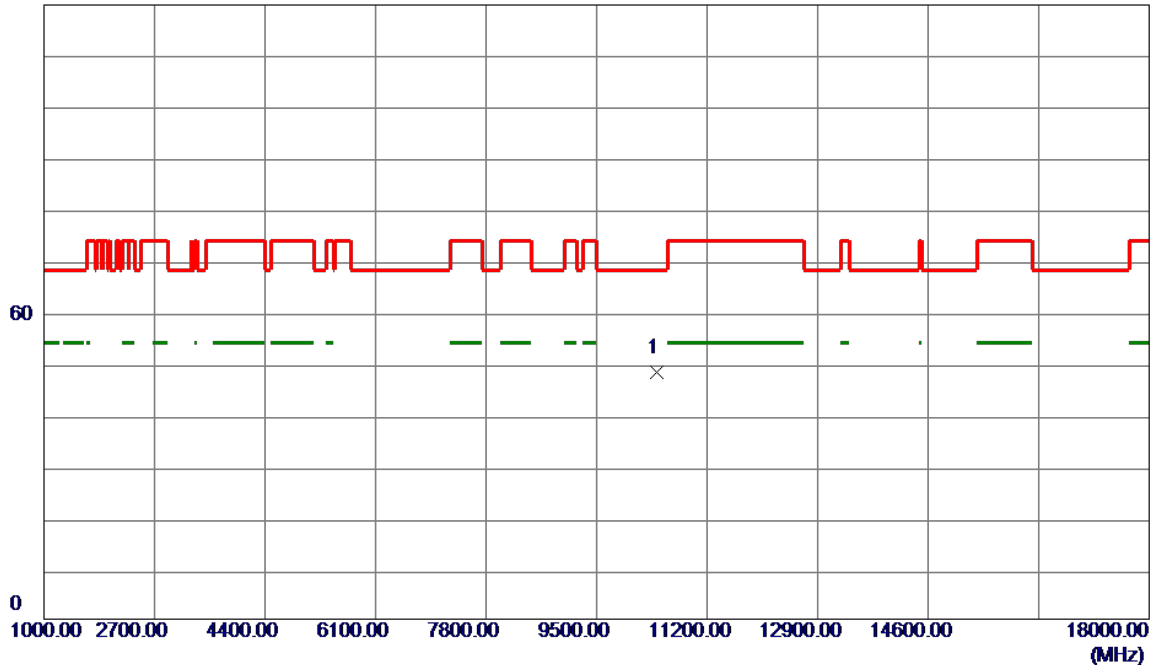


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	40.58	7.68	48.26	68.20	-19.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/6/2
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

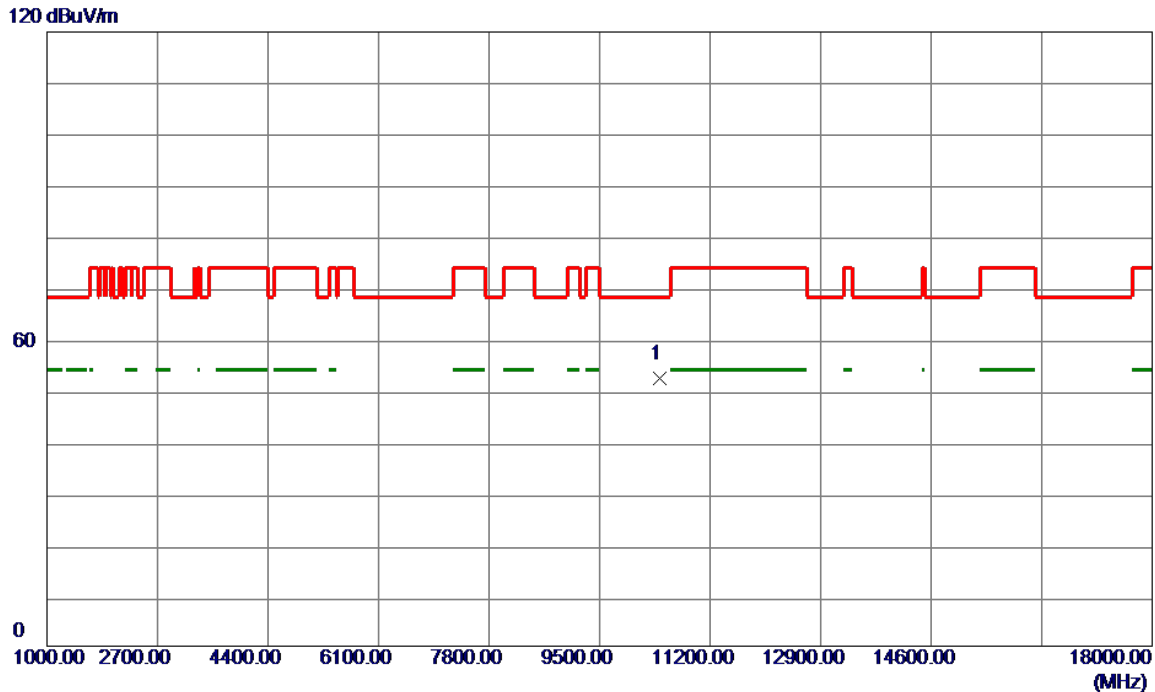


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	44.66	7.68	52.34	68.20	-15.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/6/2
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

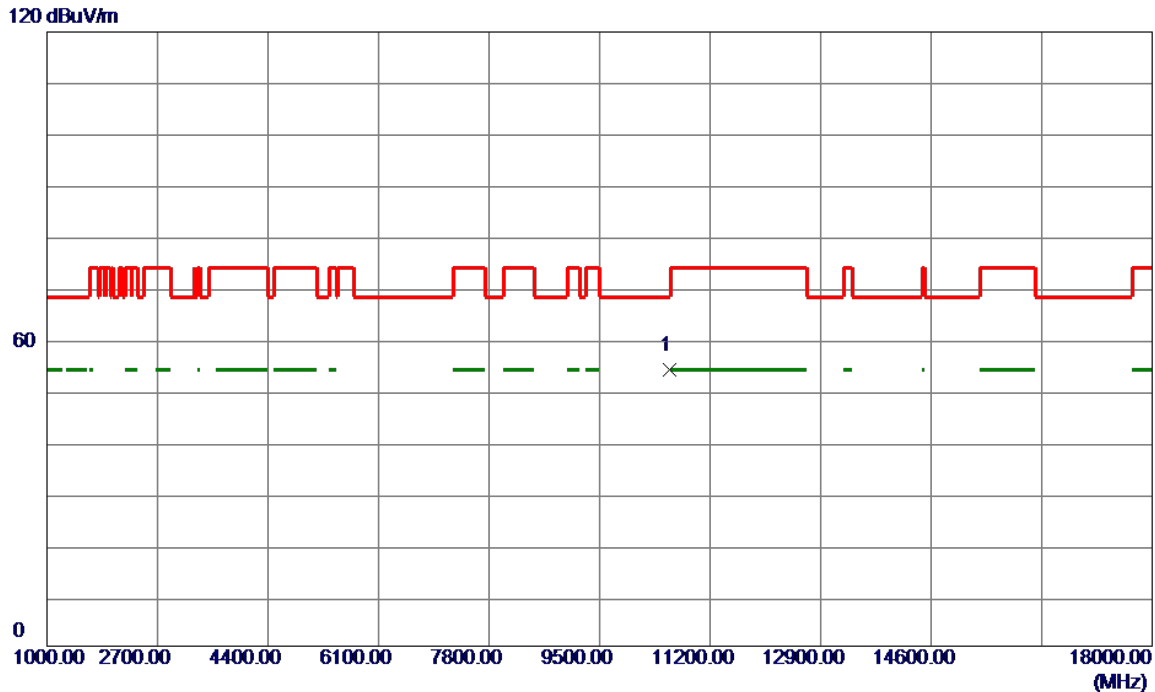


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10580.0000	46.17	7.76	53.93	68.20	-14.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/6/2
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

120 dBuV/m

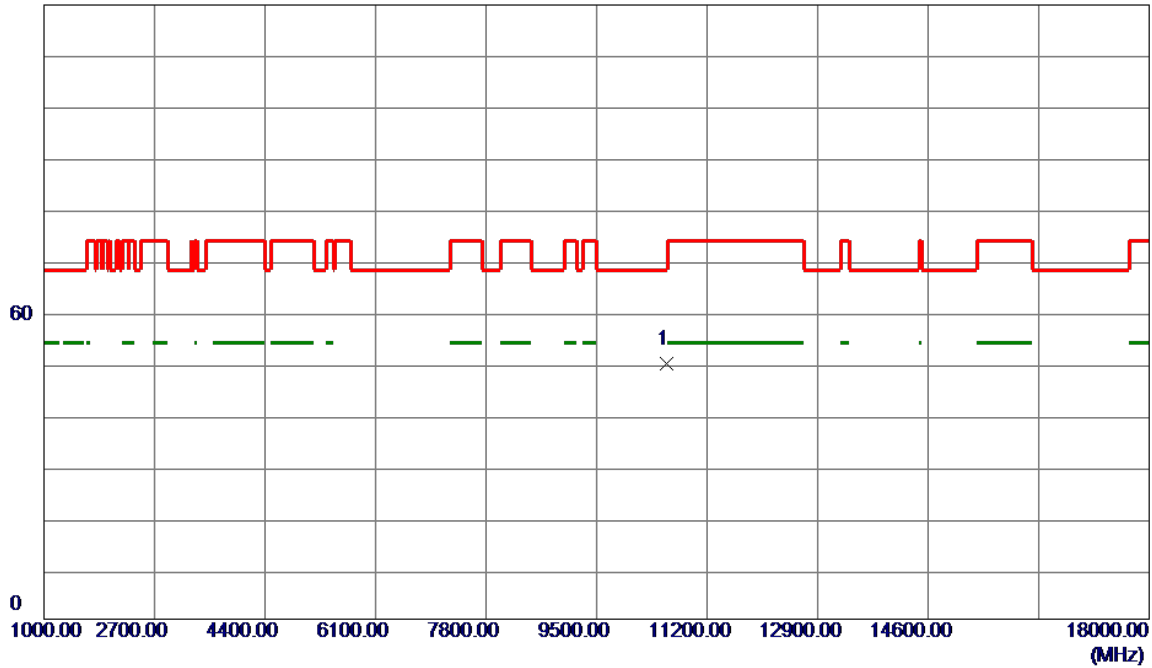


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	42.06	7.76	49.82	68.20	-18.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/6/2
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

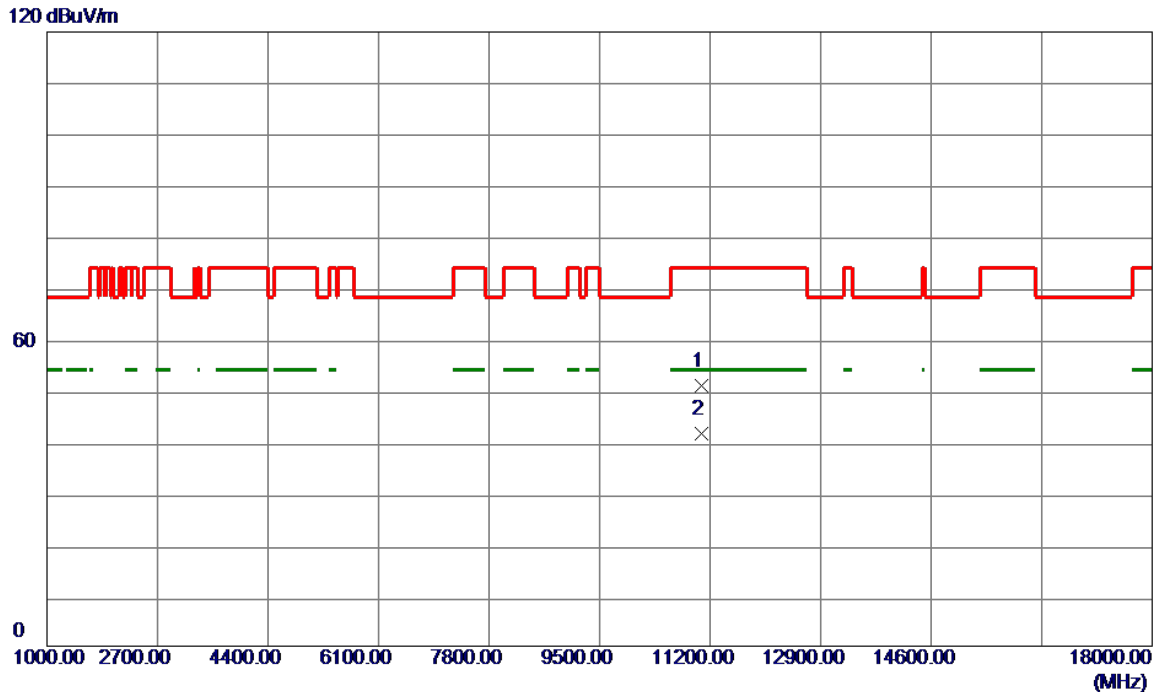

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	42.80	8.07	50.87	74.00	-23.13	Peak	
2 *	11060.0000	33.39	8.07	41.46	54.00	-12.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.