



MEASUREMENT REPORT

FCC ID : 2BH7FD205
APPLICANT : TP-Link Systems Inc.
Application Type : Certification
Product : Video Doorbell Mini
Model No. : Tapo D205
Series Model No. : TD20
Brand Name : Tapo
FCC Classification : Digital Transmission System (DTS)
FCC Rule Part(s) : Part15 Subpart C (Section 15.247)
Test Procedure(s) : ANSI C63.10-2013
Received Date : June 2, 2025
Test Date : June 4, 2025~ June 6, 2025

Tested By : Owen Tsai
(Owen Tsai)
Reviewed By : Paddy Chen
(Paddy Chen)
Approved By : Chenz Ker
(Chenz Ker)



The test results only relate to the tested sample.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2506TW0101-U2	1.0	Original Report	2025-06-26	

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Product Specification Subjective to this Standard.....	8
2.3. Test Mode	9
2.4. Operation Frequency / Channel List.....	9
2.5. Test Configuration	10
2.6. Test System Details	11
2.7. Test Software.....	11
2.8. Duty Cycle.....	11
2.9. EMI Suppression Device(s)/Modifications	12
2.10. Labeling Requirements.....	12
3. DESCRIPTION of TEST	13
3.1. Evaluation Procedure	13
3.2. AC Line Conducted Emissions	13
3.3. Radiated Emissions	14
4. ANTENNA REQUIREMENTS.....	15
5. TEST EQUIPMENT CALIBRATION DATE.....	16
6. MEASUREMENT UNCERTAINTY.....	17
7. TEST RESULT	18
7.1. Summary.....	18
7.2. 6dB Bandwidth Measurement	19
7.2.1. Test Limit	19
7.2.2. Test Procedure used	19
7.2.3. Test Setting	19
7.2.4. Test Setup	19
7.2.5. Test Result	20
7.3. Output Power Measurement.....	23
7.3.1. Test Limit	23
7.3.2. Test Procedure Used.....	23
7.3.3. Test Setting	23
7.3.4. Test Setup	23
7.3.5. Test Result of Output Power	24
7.4. Power Spectral Density Measurement	25
7.4.1. Test Limit	25
7.4.2. Test Procedure Used.....	25
7.4.3. Test Setting	25
7.4.4. Test Setup	26
7.4.5. Test Result	27

7.5.	Out-of-Band Spurious Emissions Emissions Measurement	33
7.5.1.	Test Limit	33
7.5.2.	Test Procedure Used	33
7.5.3.	Test Settling	33
7.5.4.	Test Setup	33
7.5.5.	Test Result	34
7.6.	Radiated Spurious Emission Measurement	39
7.6.1.	Test Limit	39
7.6.2.	Test Procedure Used	39
7.6.3.	Test Setting	39
7.6.4.	Test Setup	41
7.6.5.	Test Result	43
7.7.	Radiated Restricted Band Edge Measurement	75
7.7.1.	Test Limit	75
7.7.2.	Test Procedure Used	75
7.7.3.	Test Setting	75
7.7.4.	Test Setup	77
7.7.5.	Test Result	78
7.8.	AC Conducted Emissions Measurement	94
7.8.1.	Test Limit	94
7.8.2.	Test Setup	94
7.8.3.	Test Result	95
8.	CONCLUSION	97
	Appendix A : Test Photograph	98
	Appendix B : External Photograph	98
	Appendix C : Internal Photograph	98

General Information

Applicant	TP-Link Systems Inc.
Applicant Address	10 Mauchly, Irvine, CA 92618
Manufacturer	TP-Link Systems Inc.
Manufacturer Address	10 Mauchly, Irvine, CA 92618
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.247

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

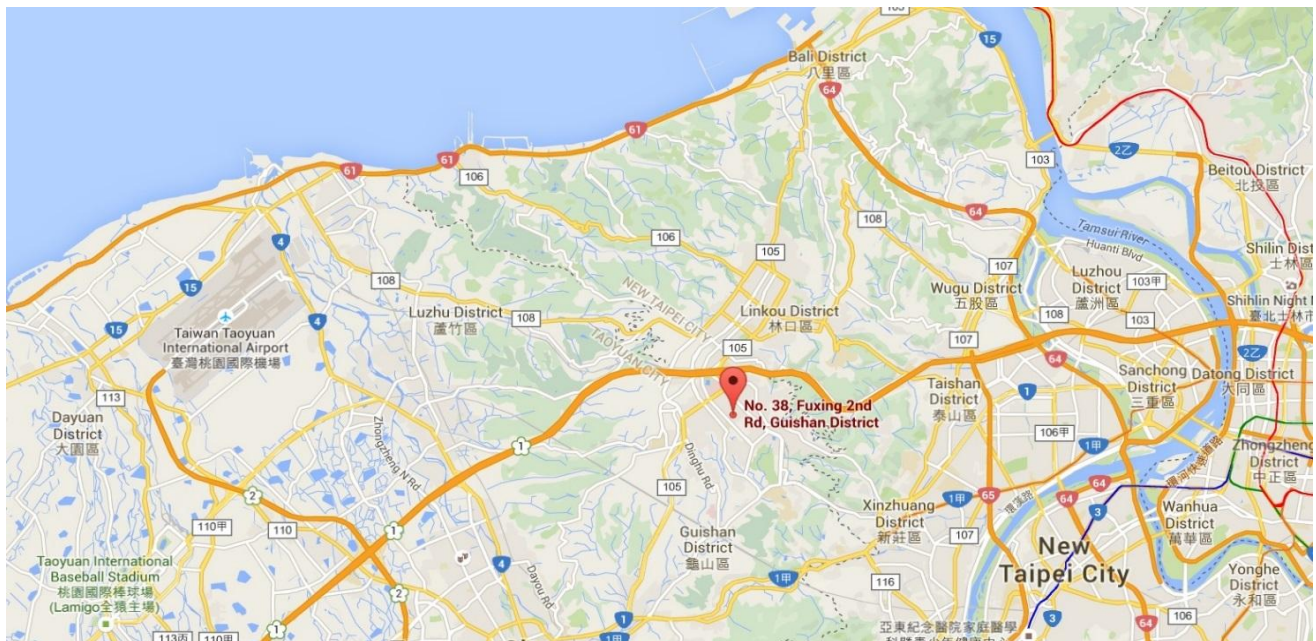

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Video Doorbell Mini
Model No.	Tapo D205
Series Model No.	TD20
Brand Name	Tapo
Specification	WLAN: 802.11b/g/n WPAN: Bluetooth Single Mode
EUT Identification No.:	#1-1 (Conducted) #1-2 (Radiated)
Accessory	
Adapter	Brand: DVE Model No: DSA-5PF07-05 FUS 050100 Input: AC 100-240V~0.2A, 50-60Hz Output: 5.0V=1.0A 5.0W

Note:

Model Difference: The difference of models only for marketing different, the other hardware was the same. (declared by the manufacturer)

2.2. Product Specification Subjective to this Standard

Operating Frequency	2402~2480MHz
Type of modulation	GFSK
Data Rate	1Mbps, 2Mbps

Antenna Type	Frequency Band (MHz)	Max Antenna Gain (dBi)
Wi-Fi 2.4GHz Antenna		
Dipole	2412 ~ 2462	-0.03
	2412 ~ 2462	-0.05
BLE Antenna		
Dipole	2402 ~ 2480	-0.03
	2402 ~ 2480	-0.05

2.3. Test Mode

Test Mode	Mode 1: Transmit - LE (1Mbps) with Ant 0 Mode 2: Transmit - LE (1Mbps) with Ant 1 Mode 3: Transmit - LE (2Mbps) with Ant 0 Mode 4: Transmit - LE (2Mbps) with Ant 1
-----------	--

Note: Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.


2.4. Operation Frequency / Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	N/A	N/A	N/A	N/A

2.5. Test Configuration

This device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

Connection Diagram

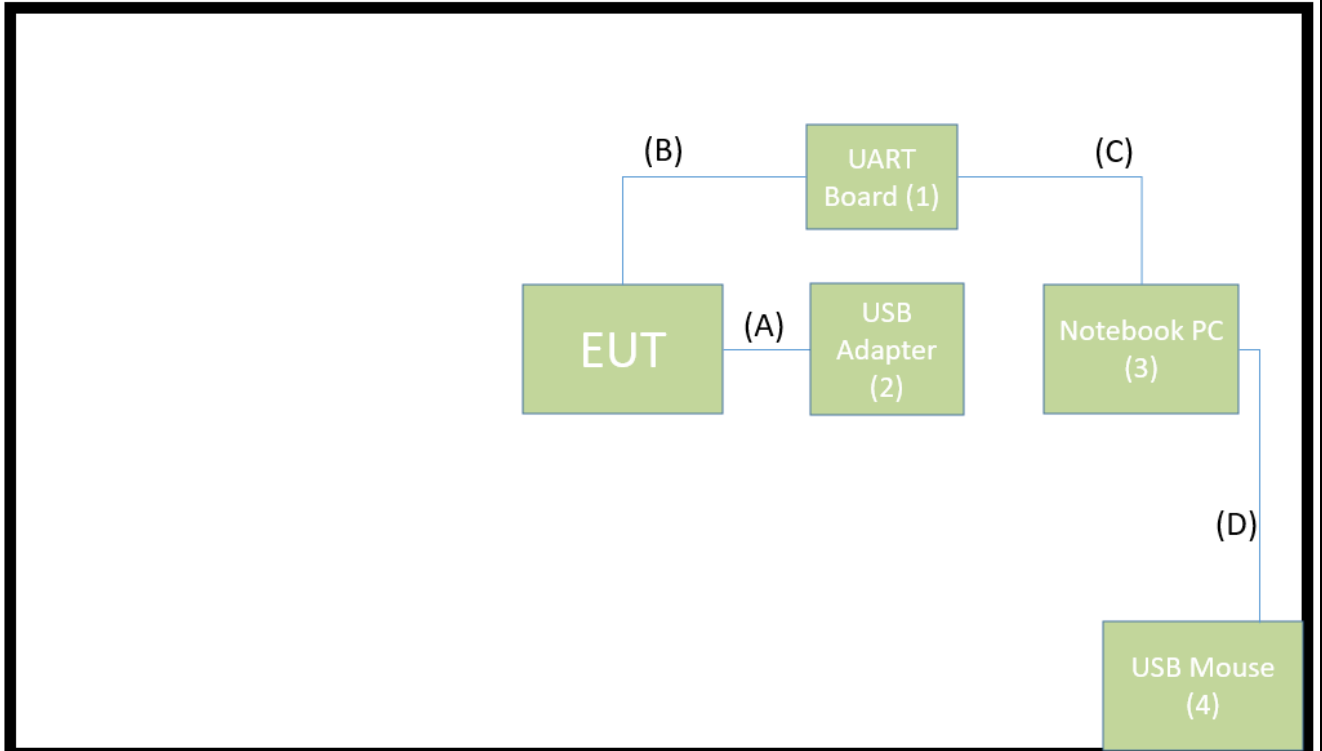

Signal Cable Type		Signal Cable Description
A	USB Type A to Type C Cable	Non-shielded, 0.5m
B	Signal Cable	Non-shielded, 0.3m
C	USB Cable	Shielded, 1.0m
D	USB Mouse Cable	Shielded, 1.6m

2.6. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:


No.	Product	Brand	Model No.	Serial No.	Power Cord
1	UART Board	GZUt	CH340G	N/A	N/A
2	USB Adapter	DVE	DSA-5PF07-05 FUS 050100	N/A	N/A
3	Notebook PC	Lenovo	20SL	N/A	Non-shielded, 0.8m
4	USB Mouse	Logitech	M90	N/A	N/A

2.7. Test Software

The test utility software used during testing was “RTLBTAPP V5.2.4.11”.

2.8. Duty Cycle

Test Mode	Duty Cycle
BLE-1Mbps	62.84%
BLE-2Mbps	33.65%

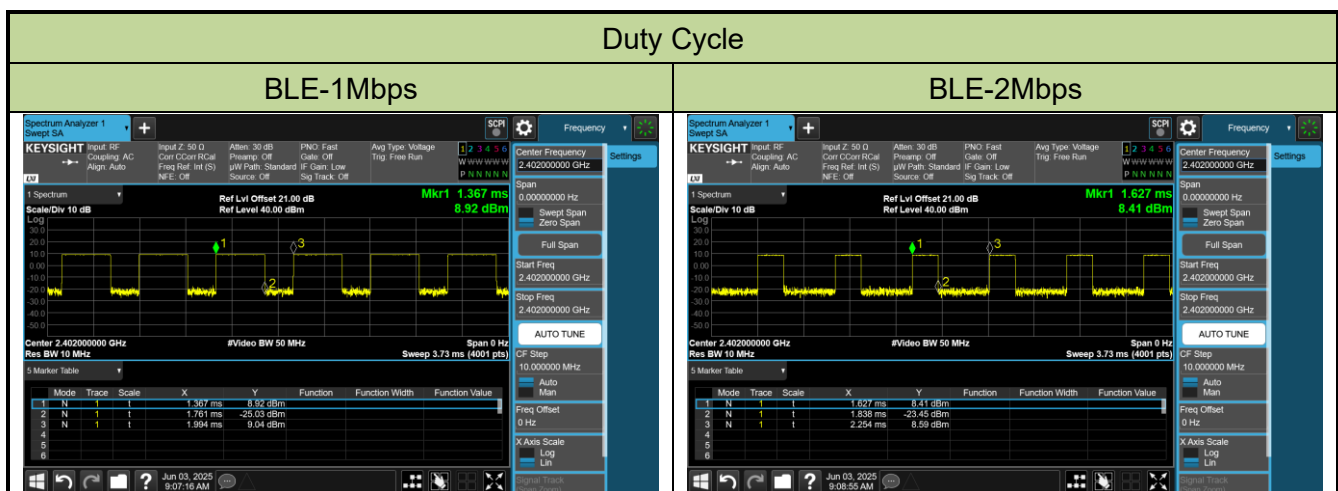

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the **Video Doorbell Mini**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated emissions test results are shown in Section 7.6 & 7.7 .

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Video Doorbell Mini**, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2026/4/14
Cable	Rosnol	N1C50-RG400-B 1C50-500CM	MRTTWE00013	1 year	2025/7/14
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2026/3/4

Radiated Emissions – AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2026/4/16
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00086	1 year	2025/11/5
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2026/5/14
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2026/5/12
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2026/3/27
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2026/3/20
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2026/3/4
Signal Analyzer	R&S	FSVA3044	MRTTWA00092	1 year	2025/6/20
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2025/6/25
Cable	HUBERSUHNER	EMC105-NM-NM -3000	MRTTWE00035	1 year	2025/6/25
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00050	1 year	2026/6/5

Conducted Test Equipment – SR6

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2025/9/24
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2025/8/12
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2026/3/11

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.82^\circ\text{C}/ \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

Product Name: Video Doorbell Mini

FCC Classification: (DTS) Digital Transmission System

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8.00\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Out-of-Band Emissions	Conducted $\geq 30\text{dBc}$		Pass	Section 7.5
15.205 15.209	Spurious Emission	< FCC 15.209 limits	Radiated	Pass	Section 7.6
15.205 15.209	Band Edge Measurement	$\leq 74\text{dBuV/m(Peak)}$ $\leq 54\text{dBuV/m(Average)}$		Pass	Section 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) For radiated emission test, every axis (X, Y, Z) was also verified when applicable. The test results shown in the following sections represent the worst case emissions.
- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

ANSI C63.10 - 2013 Section 11.8

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

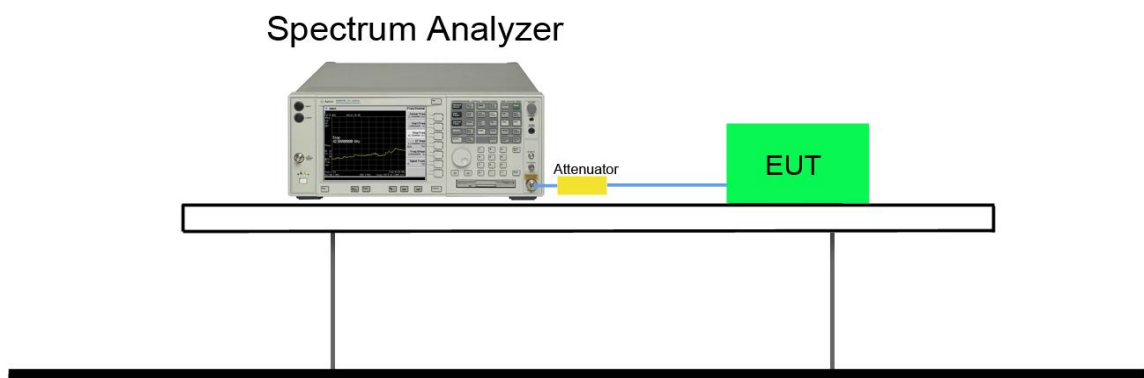

7.2.5. Test Result

Product	Video Doorbell Mini	Temperature	25°C
Test Engineer	Fran	Relative Humidity	54%
Test Site	SR6	Test Date	2025/6/4


Test Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0					
LE 1Mbps	00	2402	0.6678	≥ 0.5	Pass
	19	2440	0.7140	≥ 0.5	Pass
	39	2480	0.6159	≥ 0.5	Pass
LE 2Mbps	00	2402	1.1390	≥ 0.5	Pass
	19	2440	1.1270	≥ 0.5	Pass
	39	2480	0.9719	≥ 0.5	Pass

LE 1Mbps

LE CH00 (2402MHz)



LE CH19 (2440MHz)

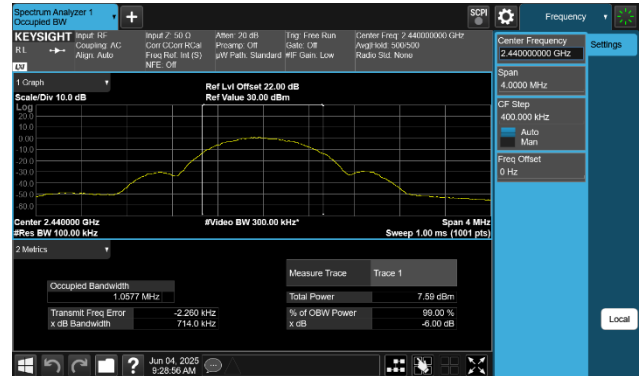


LE CH39 (2480MHz)




LE 2Mbps


LE CH00 (2402MHz)

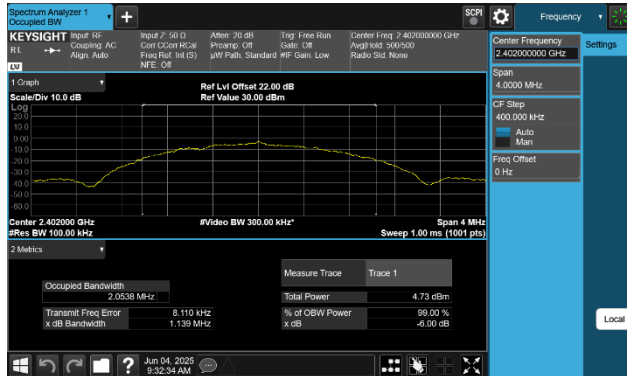

LE CH19 (2440MHz)

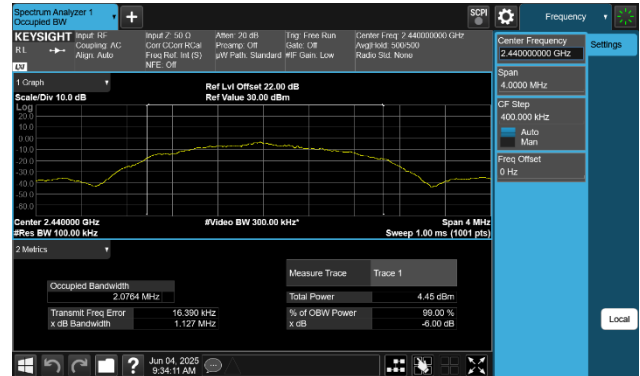

LE CH39 (2480MHz)

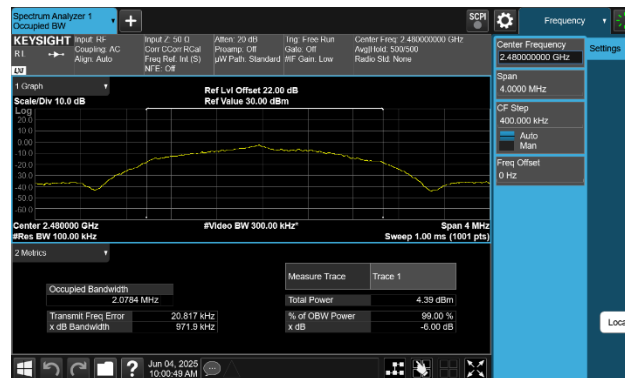

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.3.2. Test Procedure Used


ANSI C63.10 - 2013 Section 11.9.2.3.2

7.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4. Test Setup

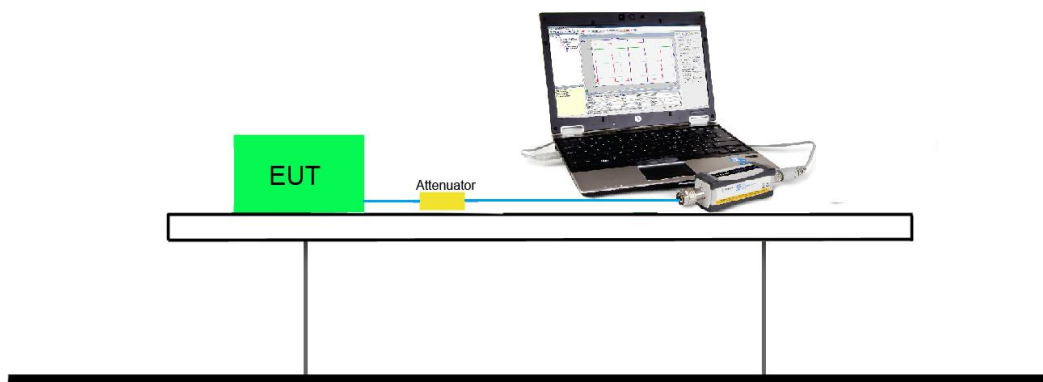

7.3.5. Test Result of Output Power

Product	Video Doorbell Mini	Temperature	25°C
Test Engineer	Fran	Relative Humidity	54%
Test Site	SR6	Test Date	2025/6/6

Test Mode	Channel No.	Frequency (MHz)	Average Power (dBm)	Power Limit (dBm)
Ant 0				
LE 1Mbps	00	2402	9.57	< 30
	19	2440	9.68	< 30
	39	2480	9.18	< 30
LE 2Mbps	00	2402	9.65	< 30
	19	2440	9.81	< 30
	39	2480	9.34	< 30

Test Mode	Channel No.	Frequency (MHz)	Average Power (dBm)	Power Limit (dBm)
Ant 1				
LE 1Mbps	00	2402	9.11	< 30
	19	2440	9.67	< 30
	39	2480	9.31	< 30
LE 2Mbps	00	2402	9.24	< 30
	19	2440	9.79	< 30
	39	2480	9.46	< 30

Note1: Output power =Reading value on power meter + cable loss.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


7.4.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.10.5

7.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a, to the measured PSD to compute the average PSD during the actual transmission time.

7.4.4. Test Setup

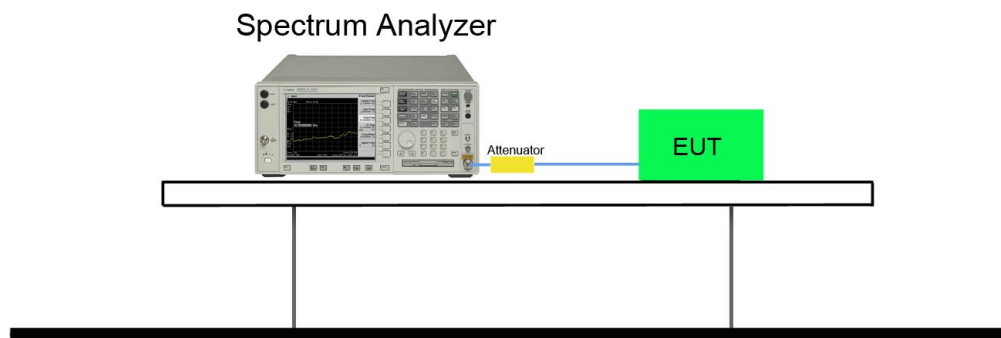

7.4.5. Test Result

Product	Video Doorbell Mini	Temperature	25°C
Test Engineer	Fran	Relative Humidity	54%
Test Site	SR6	Test Date	2025/6/6

Test Mode	Channel No.	Frequency (MHz)	PSD (dBm / 10kHz)	Duty Cycle (%)	Total Average PSD (dBm / 10kHz)	Limit (dBm / 3kHz)	Result
Ant 0							
LE 1Mbps	00	2402	-6.148	62.84%	-4.130	≤ 8	Pass
	19	2440	-7.022	62.84%	-5.004	≤ 8	Pass
	39	2480	-7.787	62.84%	-5.769	≤ 8	Pass
LE 2Mbps	00	2402	-10.588	33.65%	-5.858	≤ 8	Pass
	19	2440	-10.228	33.65%	-5.498	≤ 8	Pass
	39	2480	-10.414	33.65%	-5.684	≤ 8	Pass


Note: Total Average PSD= Average PSD (dBm) + 10*log (1/Duty cycle).

Test Mode	Channel No.	Frequency (MHz)	PSD (dBm / 10kHz)	Duty Cycle (%)	Total Average PSD (dBm / 10kHz)	Limit (dBm / 3kHz)	Result
Ant 1							
LE 1Mbps	00	2402	-7.314	62.84%	-5.296	≤ 8	Pass
	19	2440	-7.174	62.84%	-5.156	≤ 8	Pass
	39	2480	-7.266	62.84%	-5.248	≤ 8	Pass
LE 2Mbps	00	2402	-11.002	33.65%	-6.272	≤ 8	Pass
	19	2440	-10.105	33.65%	-5.375	≤ 8	Pass
	39	2480	-9.818	33.65%	-5.088	≤ 8	Pass


Note: Total Average PSD= Average PSD (dBm) + 10*log (1/Duty cycle).

LE 1Mbps_Ant 0

LE CH00 (2402MHz)

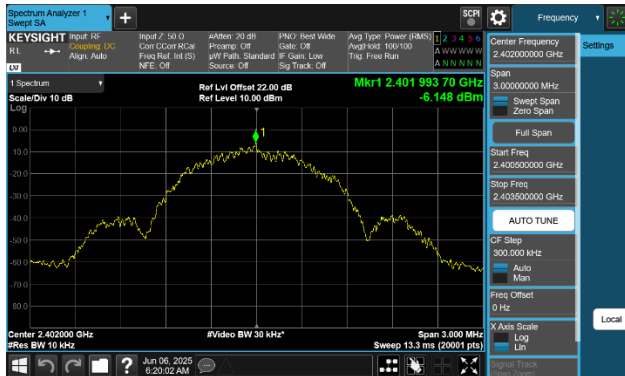

LE CH19 (2440MHz)

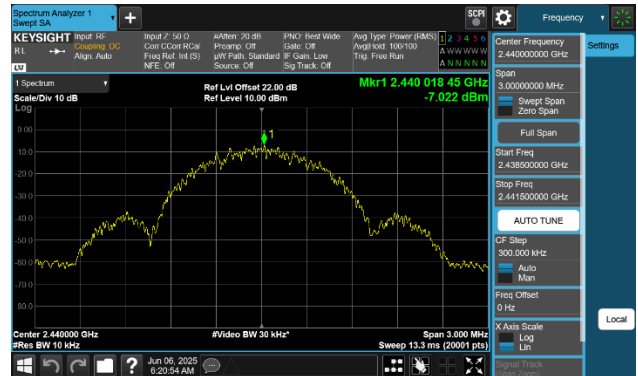


LE CH39 (2480MHz)




LE 2Mbps_Ant 0


LE CH00 (2402MHz)

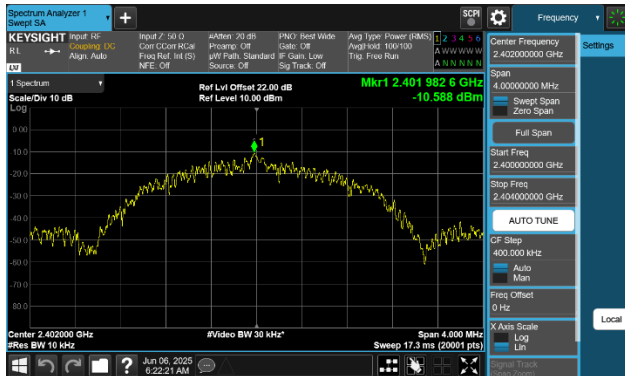

LE CH19 (2440MHz)

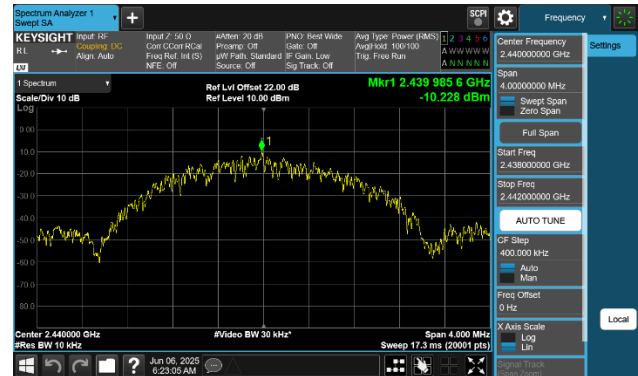


LE CH39 (2480MHz)

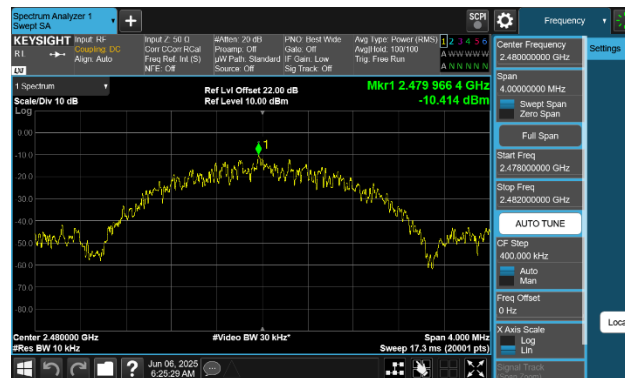


LE 1Mbps_Ant 1


LE CH00 (2402MHz)

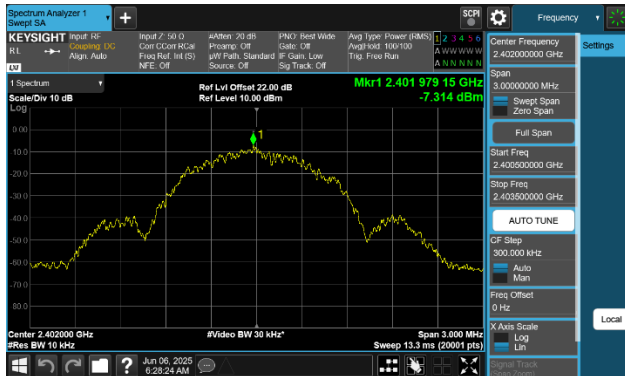

LE CH19 (2440MHz)

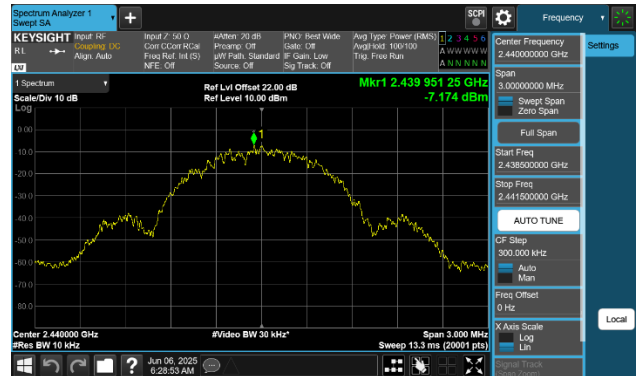


LE CH39 (2480MHz)

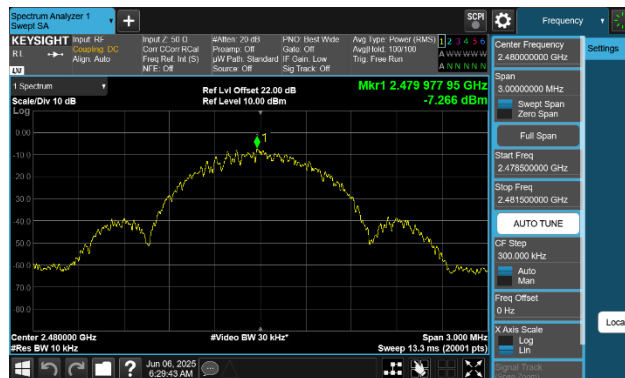


LE 2Mbps_Ant 1


LE CH00 (2402MHz)

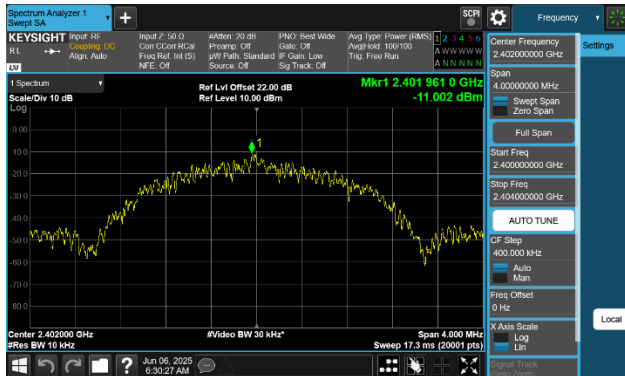

LE CH19 (2440MHz)

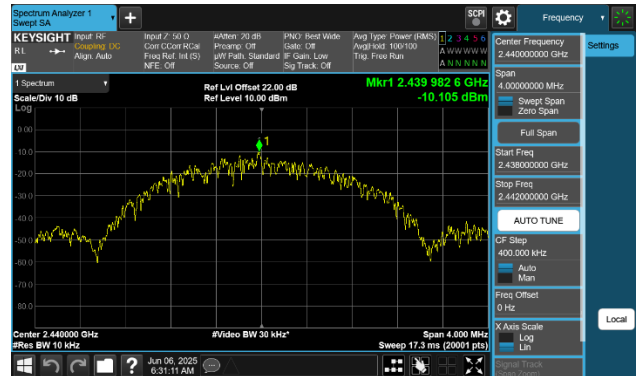

LE CH39 (2480MHz)

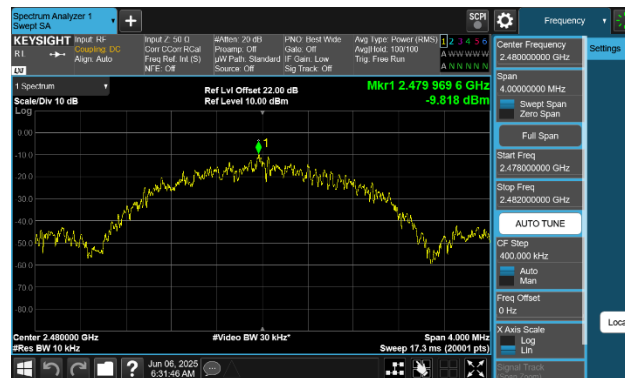

7.5. Out-of-Band Spurious Emissions Emissions Measurement

7.5.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.5.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.11 & 11.2

7.5.3. Test Settling

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

7.5.4. Test Setup

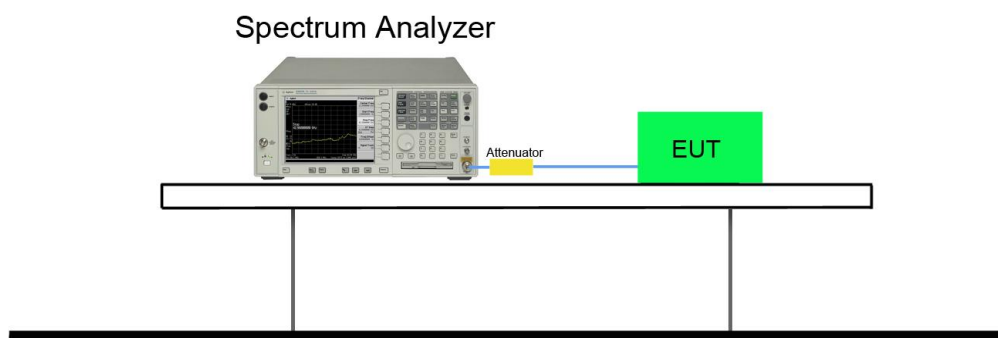


7.5.5. Test Result

Product	Video Doorbell Mini	Temperature	25°C
Test Engineer	Fran	Relative Humidity	54%
Test Site	SR6	Test Date	2025/6/4~2025/6/5


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
Ant 0 & Ant 1				
LE 1Mbps	00	2402	30dBc	Pass
	19	2440	30dBc	Pass
	39	2480	30dBc	Pass
LE 2Mbps	00	2402	30dBc	Pass
	19	2440	30dBc	Pass
	39	2480	30dBc	Pass

LE 1Mbps_Ant 0


CH00 (2402MHz)

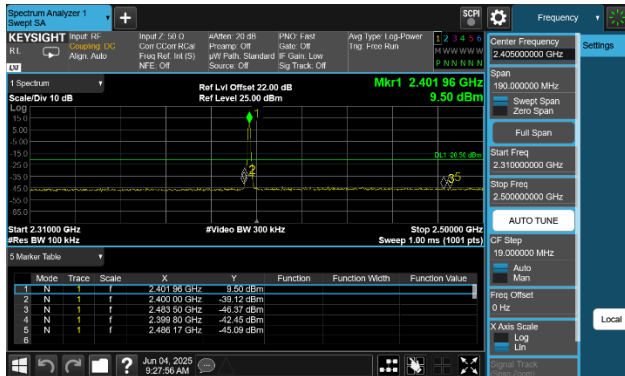


CH00 (2402MHz)

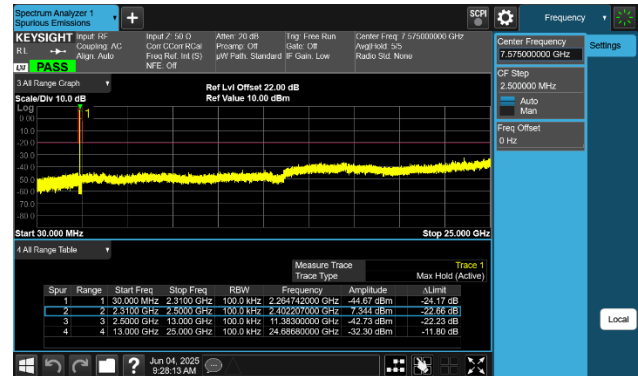


CH19 (2440MHz)

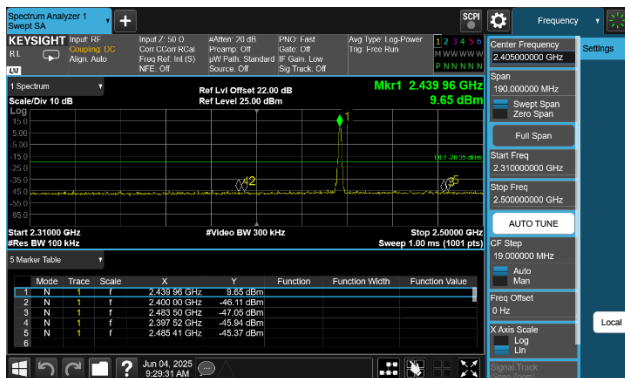


CH19 (2440MHz)

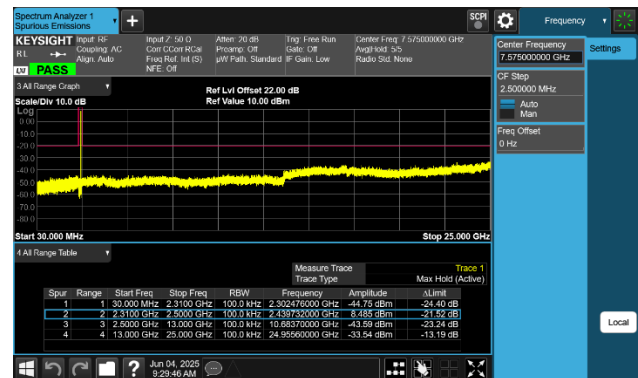

CH39 (2480MHz)

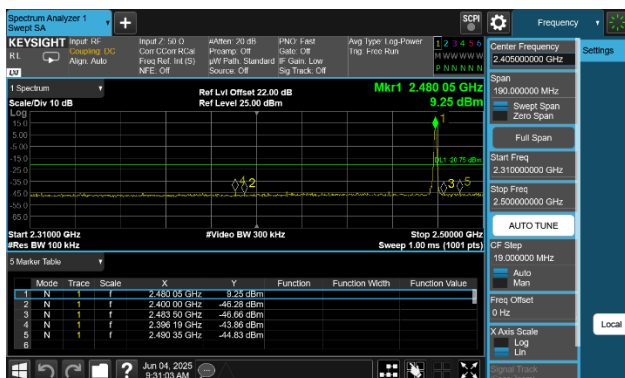


CH39 (2480MHz)

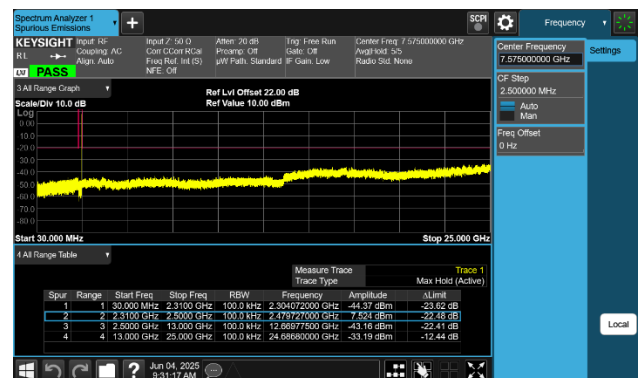


LE 2Mbps_Ant 0


CH00 (2402MHz)

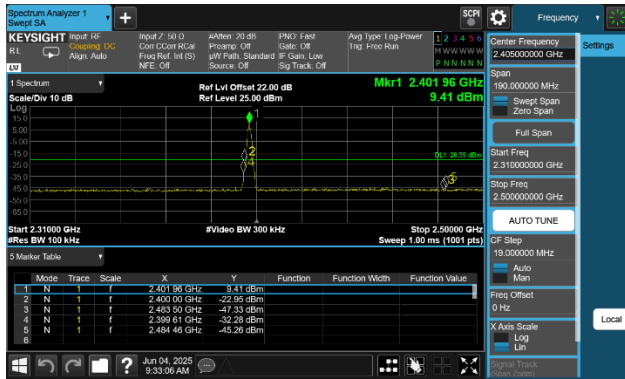


CH00 (2402MHz)

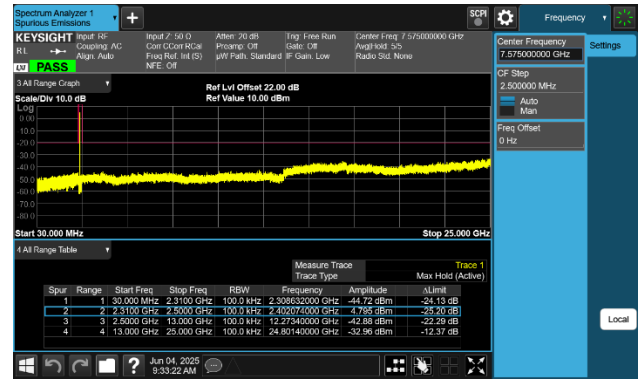


CH19 (2440MHz)

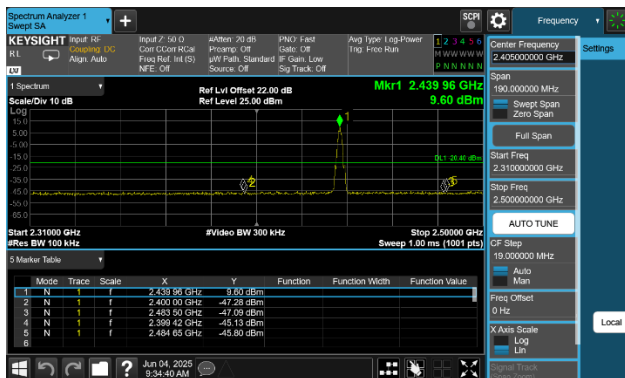


CH19 (2440MHz)

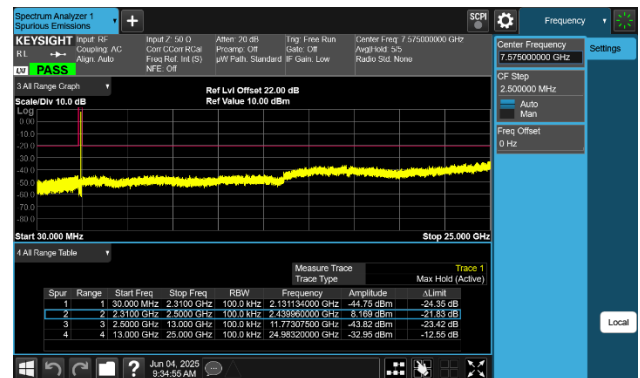

CH39 (2480MHz)

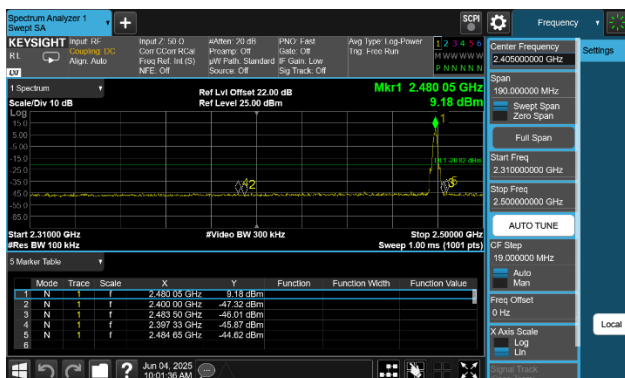


CH39 (2480MHz)

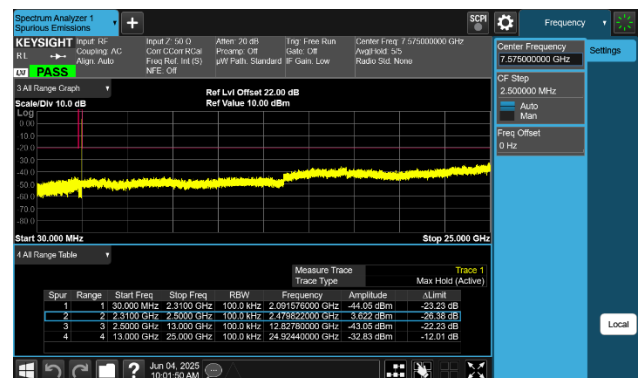


LE 1Mbps_Ant 1


CH00 (2402MHz)

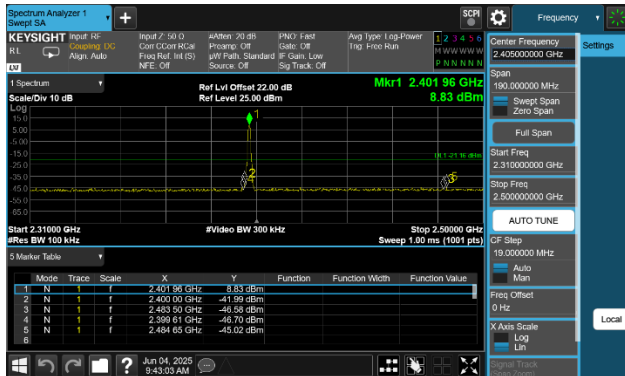


CH00 (2402MHz)

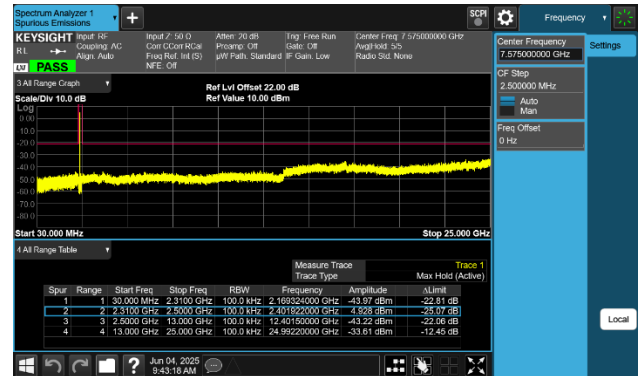


CH19 (2440MHz)

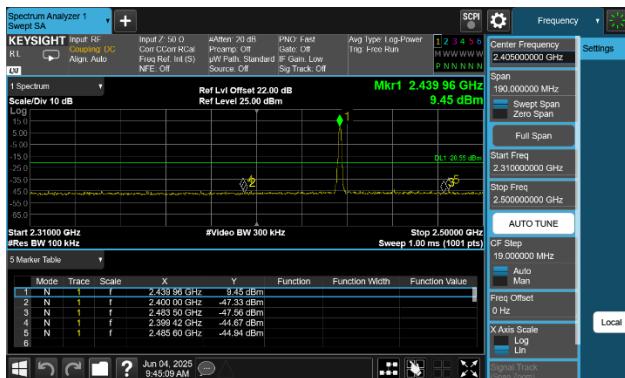


CH19 (2440MHz)

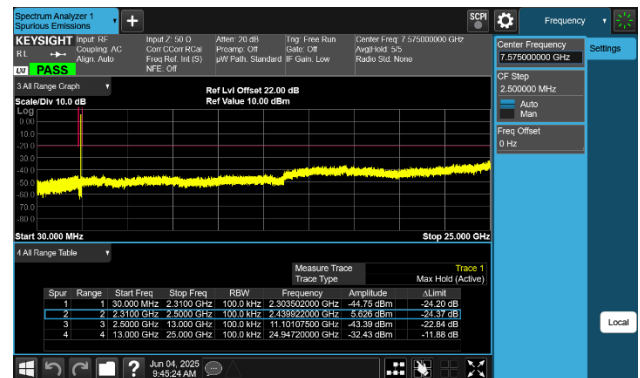

CH39 (2480MHz)

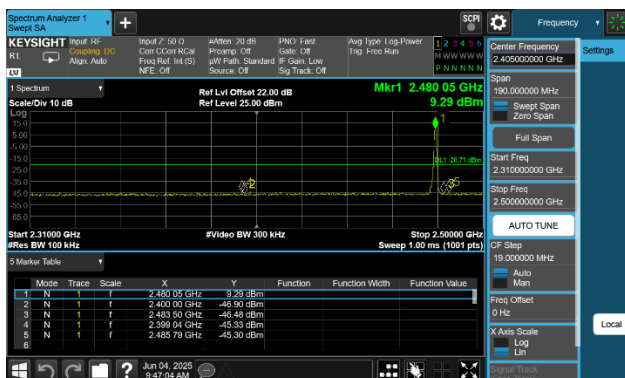


CH39 (2480MHz)

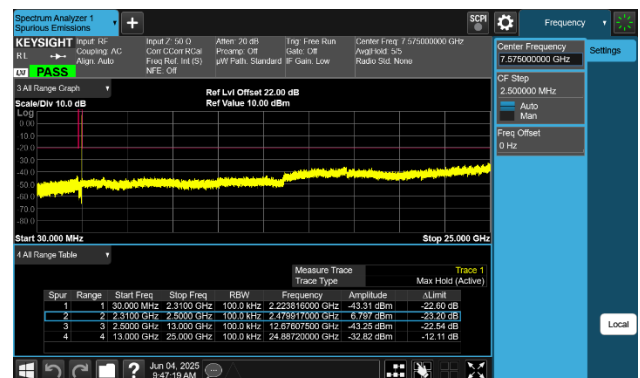


LE 2Mbps_Ant 1


CH00 (2402MHz)

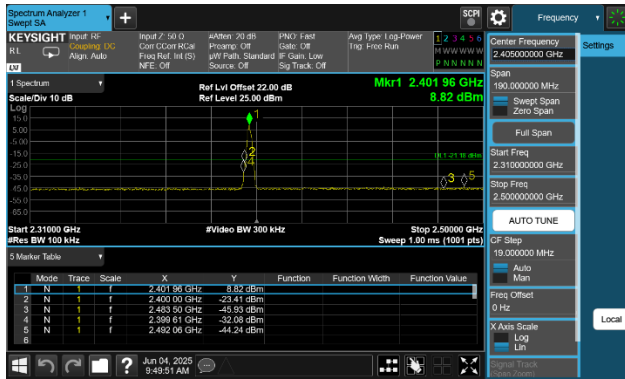


CH00 (2402MHz)

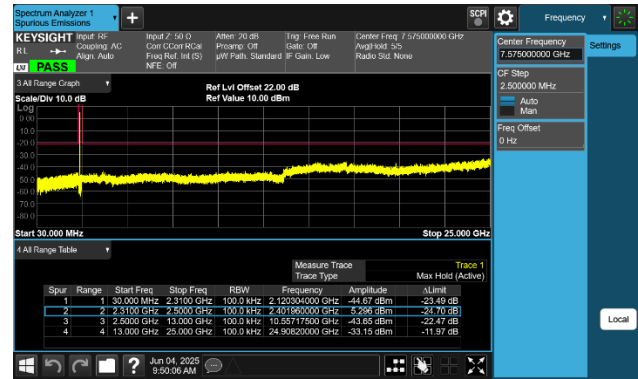


CH19 (2440MHz)

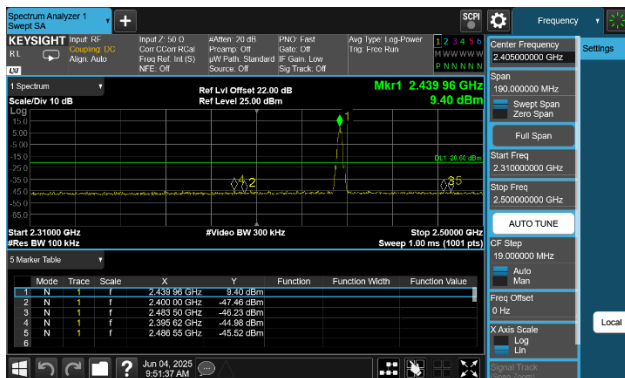


CH19 (2440MHz)

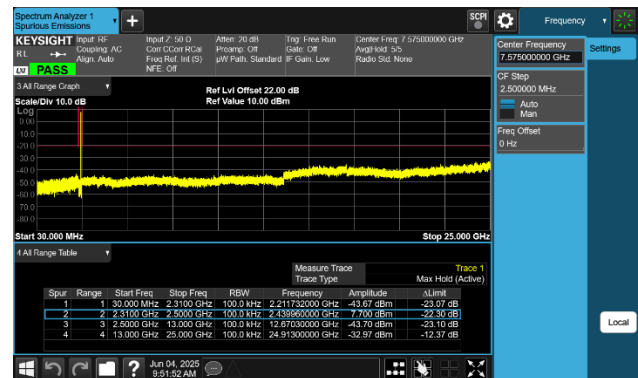

CH39 (2480MHz)

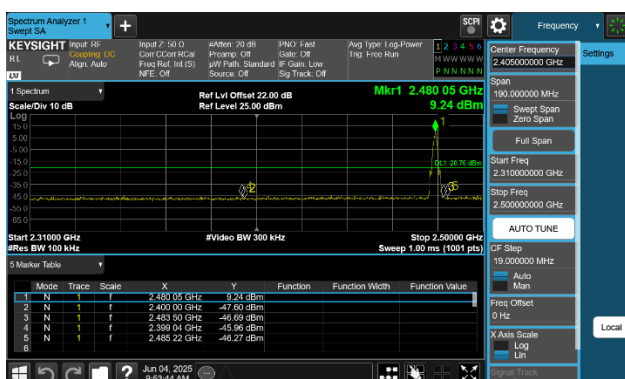

CH39 (2480MHz)

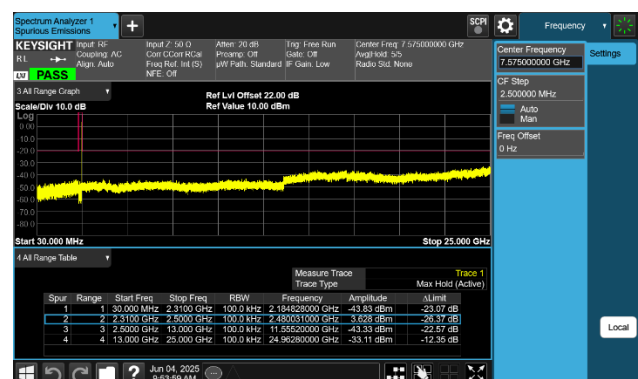

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak

5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

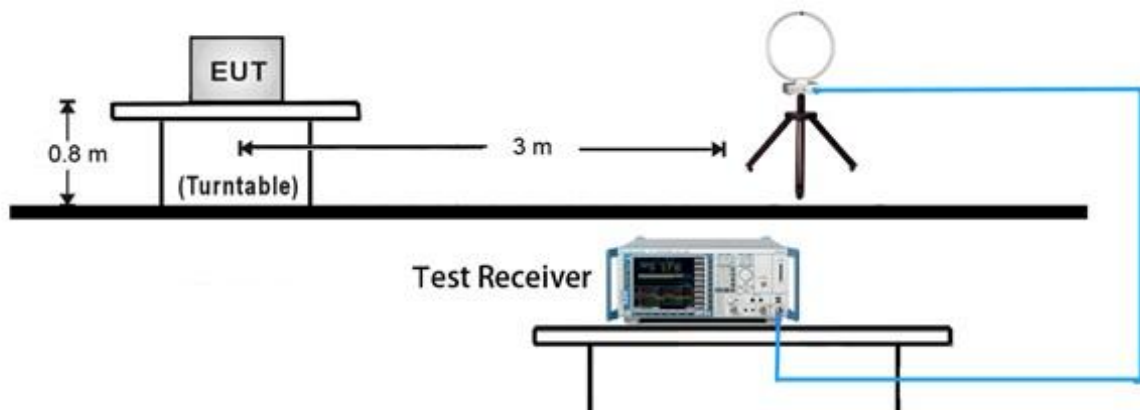

30MHz ~ 1GHz Test Setup:

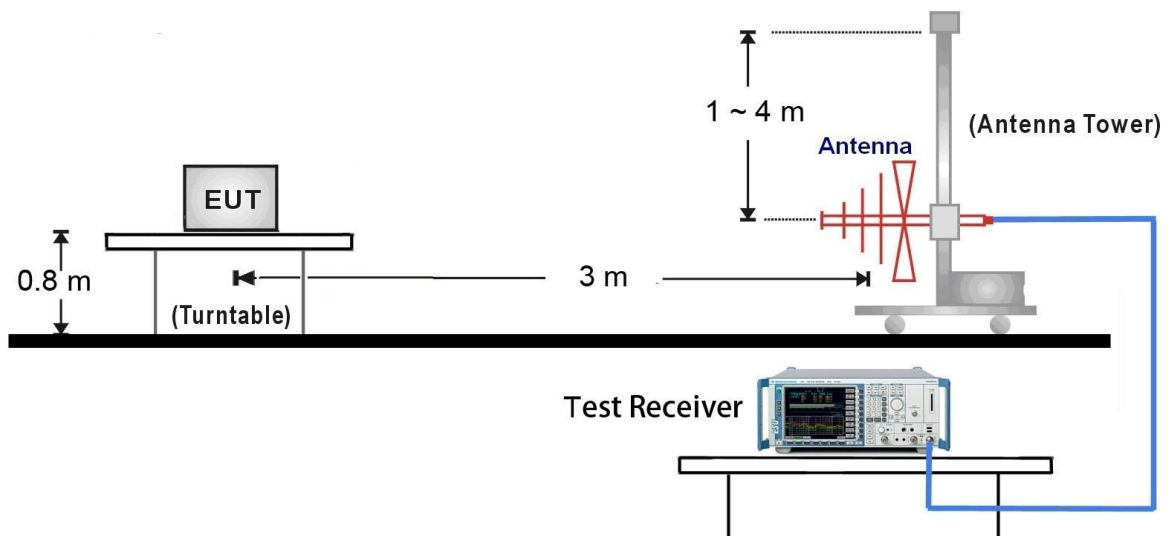


1GHz ~ 25GHz Test Setup:

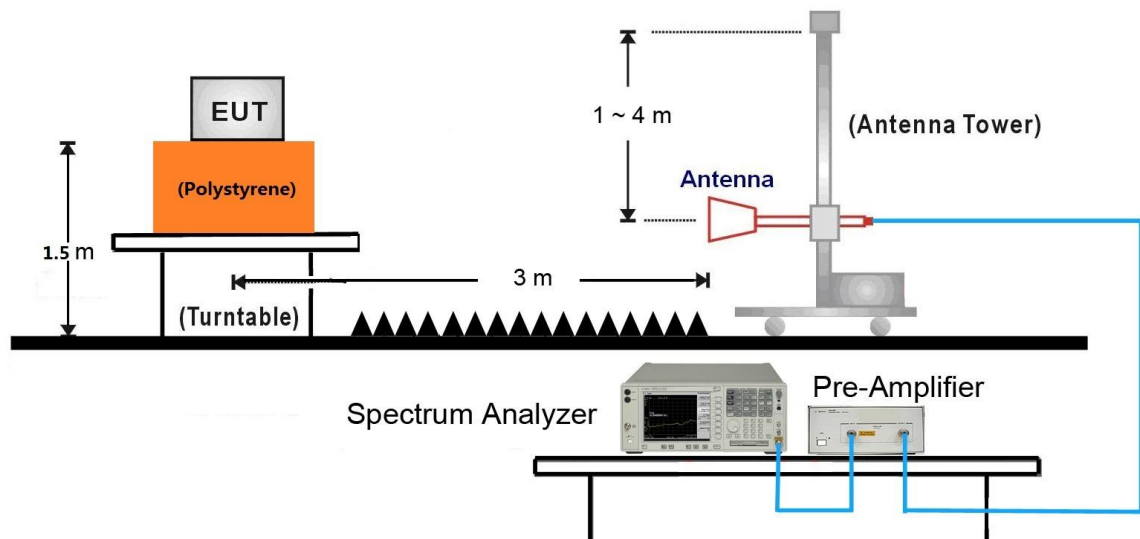

7.6.5. Test Result

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	VULB 9162	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 0	Test Voltage	AC 120V/60MHz

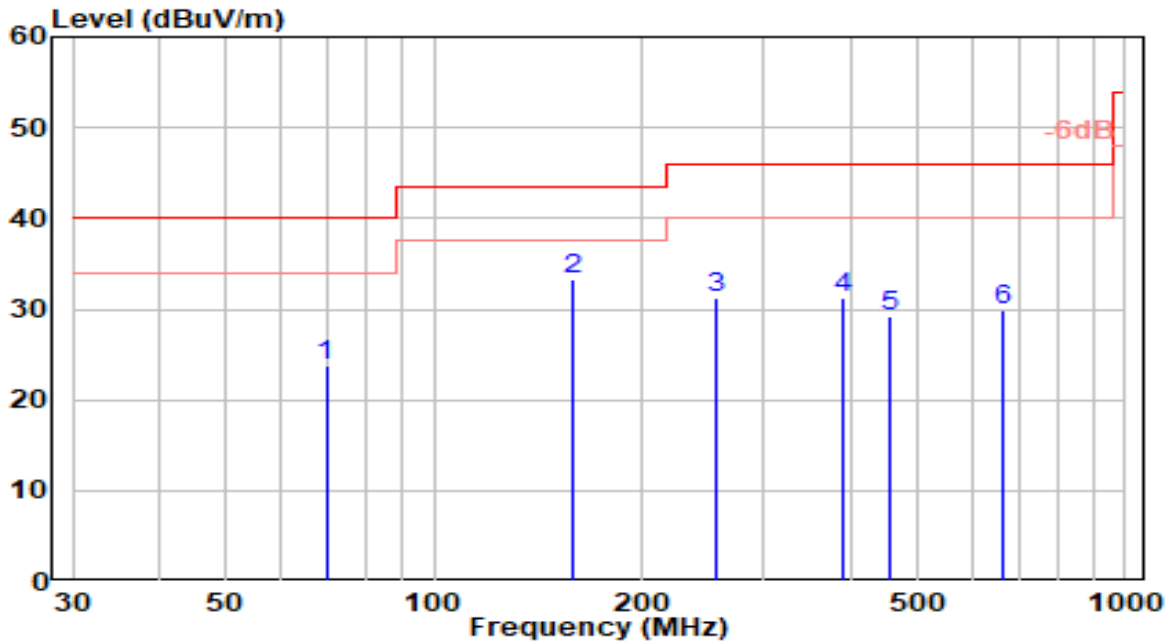


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	69.770	7.56	16.18	23.74	-16.26	40.00	100	75	QP
2	* 159.010	17.36	15.83	33.19	-10.31	43.50	200	251	QP
3	256.980	10.93	20.29	31.22	-14.78	46.00	100	242	QP
4	388.900	7.83	23.35	31.18	-14.82	46.00	200	267	QP
5	456.800	4.93	24.18	29.10	-16.90	46.00	200	329	QP
6	668.260	2.90	27.08	29.98	-16.02	46.00	100	277	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	VULB 9162	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 0	Test Voltage	AC 120V/60MHz

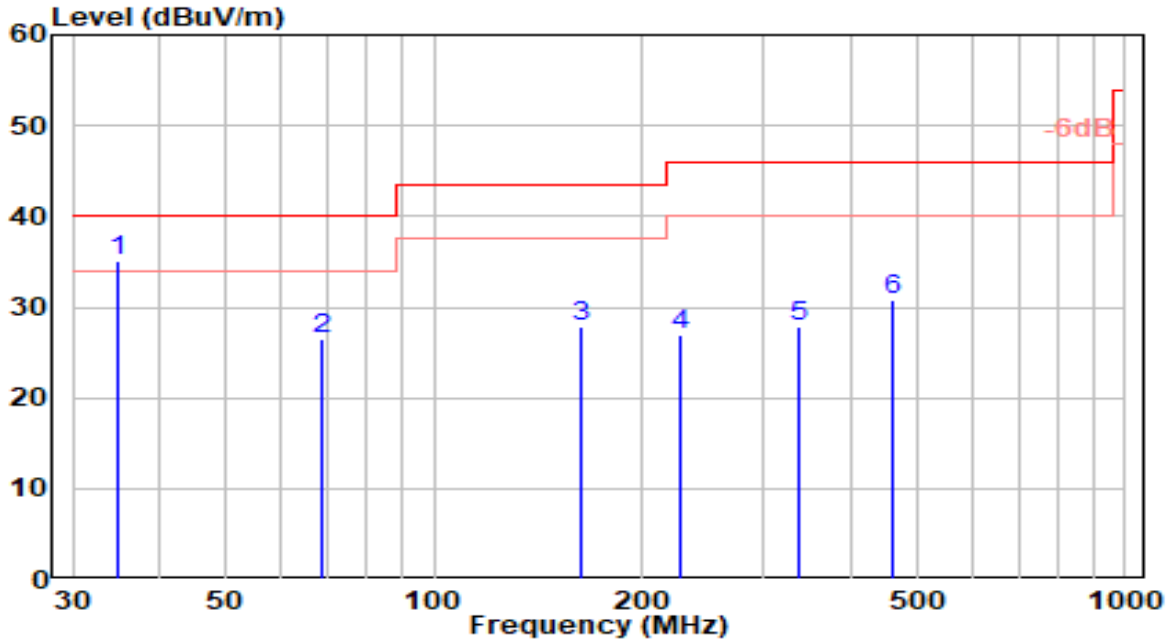


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	34.850	16.85	18.18	35.04	-4.96	40.00	100	195	QP
2		68.800	9.89	16.54	26.43	-13.57	40.00	100	34	QP
3		163.860	11.85	16.00	27.85	-15.65	43.50	200	88	QP
4		227.880	7.83	19.22	27.06	-18.94	46.00	100	307	QP
5		338.460	5.40	22.36	27.76	-18.24	46.00	144	360	QP
6		460.680	6.55	24.27	30.82	-15.18	46.00	100	326	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	VULB 9162	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 1	Test Voltage	AC 120V/60MHz

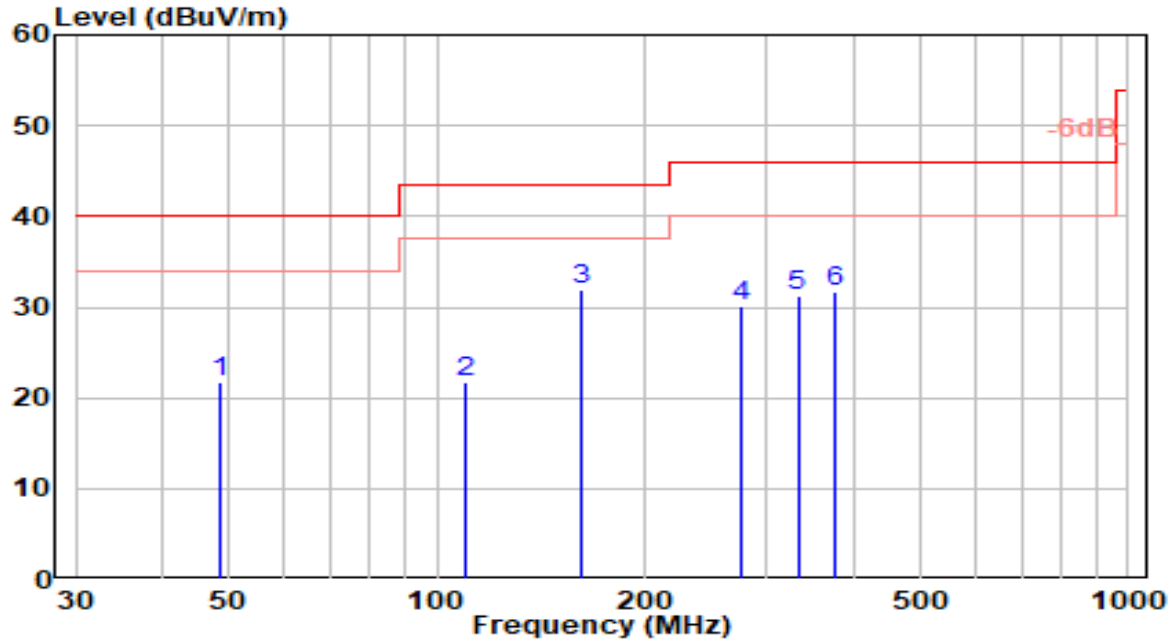


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	48.430	0.77	21.08	21.85	-18.15	40.00	100	53	QP
2	109.540	3.13	18.59	21.71	-21.79	43.50	100	213	QP
3	* 161.920	15.98	15.94	31.91	-11.59	43.50	100	351	QP
4	276.380	9.72	20.43	30.15	-15.85	46.00	100	306	QP
5	332.640	9.18	22.16	31.34	-14.66	46.00	100	87	QP
6	375.320	8.59	23.15	31.74	-14.26	46.00	100	97	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	VULB 9162	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 1	Test Voltage	AC 120V/60MHz

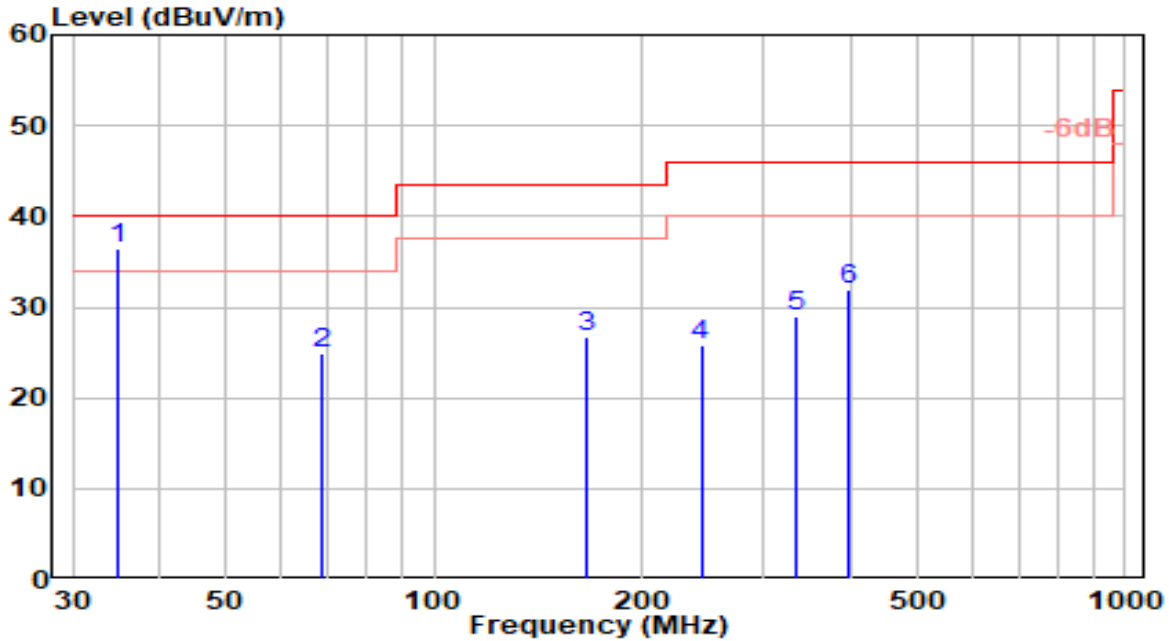


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	34.850	18.37	18.18	36.55	-3.45	40.00	100	360	QP
2		68.800	8.38	16.54	24.92	-15.08	40.00	100	36	QP
3		165.800	10.68	16.07	26.75	-16.75	43.50	100	324	QP
4		243.400	5.94	19.85	25.79	-20.21	46.00	100	286	QP
5		334.580	6.66	22.22	28.88	-17.12	46.00	100	318	QP
6		398.600	8.48	23.50	31.98	-14.02	46.00	100	0	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 0_ANT 0	Test Voltage	AC 120V/60Hz

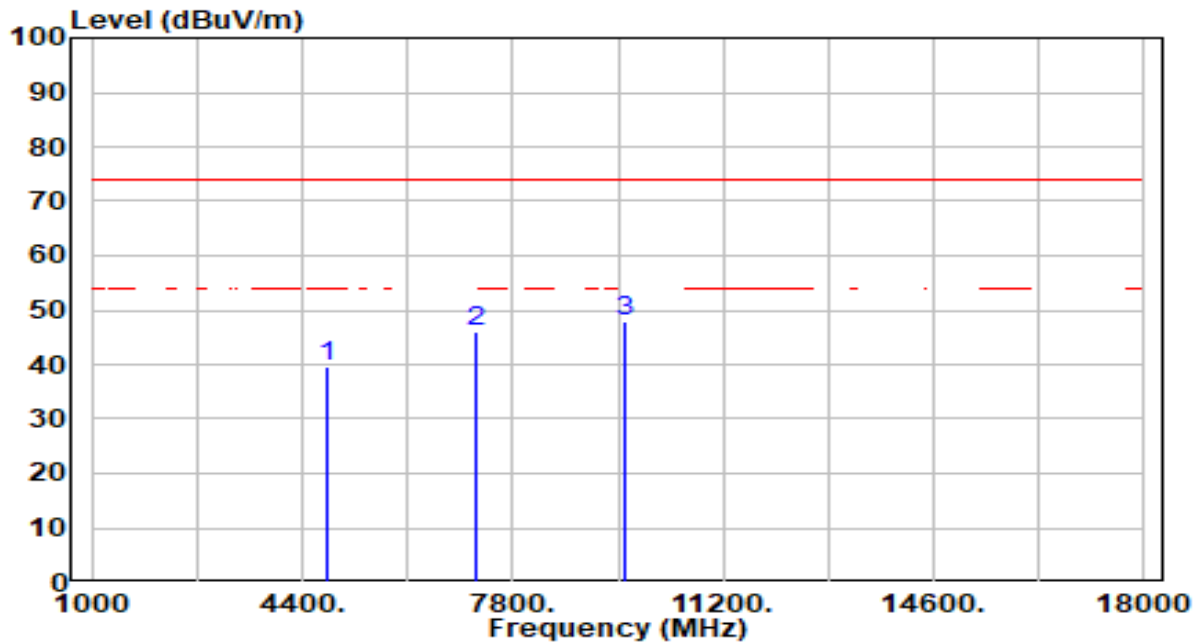


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	38.48	1.32	39.80	-34.20	74.00	100	138	Peak
2	7206.000	38.40	7.66	46.06	-27.94	74.00	100	342	Peak
3	* 9608.000	40.90	7.06	47.96	-26.04	74.00	100	3	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 0_ANT 0	Test Voltage	AC 120V/60Hz

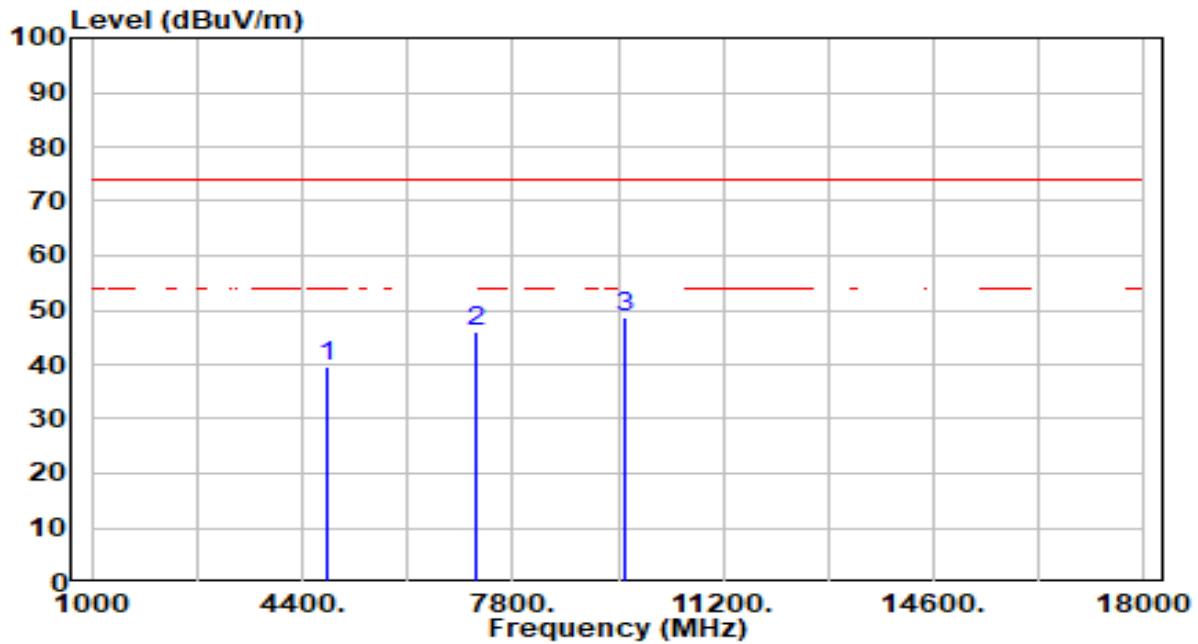


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	38.44	1.32	39.77	-34.23	74.00	100	360	Peak
2	7206.000	38.25	7.66	45.90	-28.10	74.00	100	174	Peak
3	* 9608.000	41.61	7.06	48.67	-25.33	74.00	100	323	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 0	Test Voltage	AC 120V/60Hz

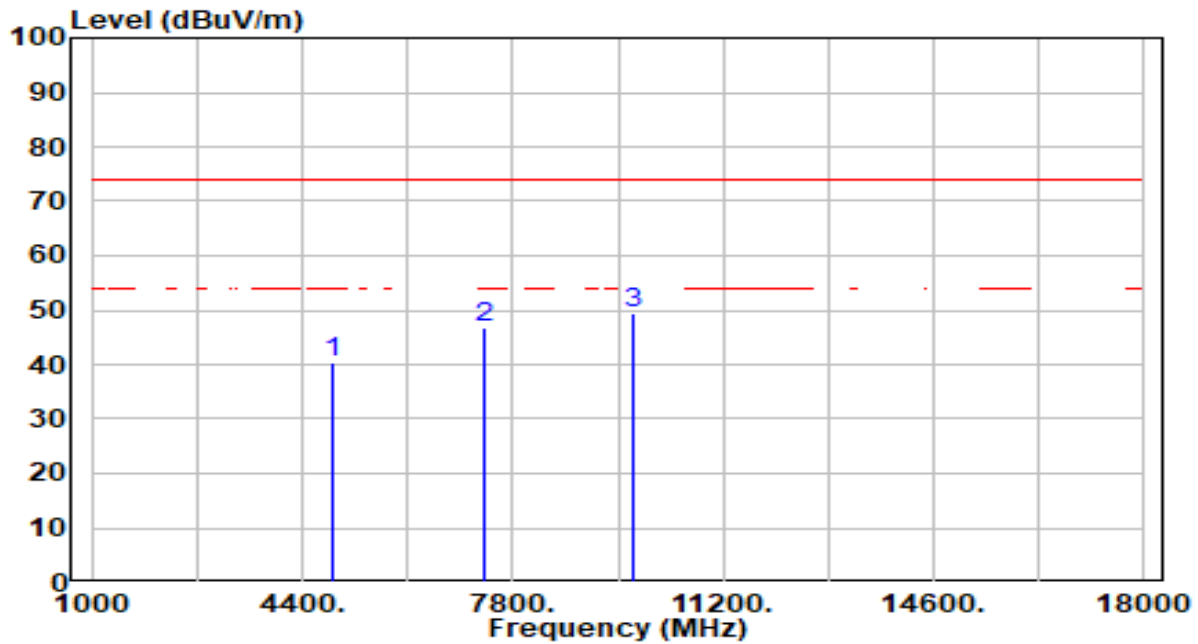


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	39.05	1.49	40.54	-33.46	74.00	100	161	Peak
2	7320.000	38.76	8.03	46.80	-27.20	74.00	100	130	Peak
3	* 9760.000	42.36	7.11	49.47	-24.53	74.00	300	317	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 0	Test Voltage	AC 120V/60Hz

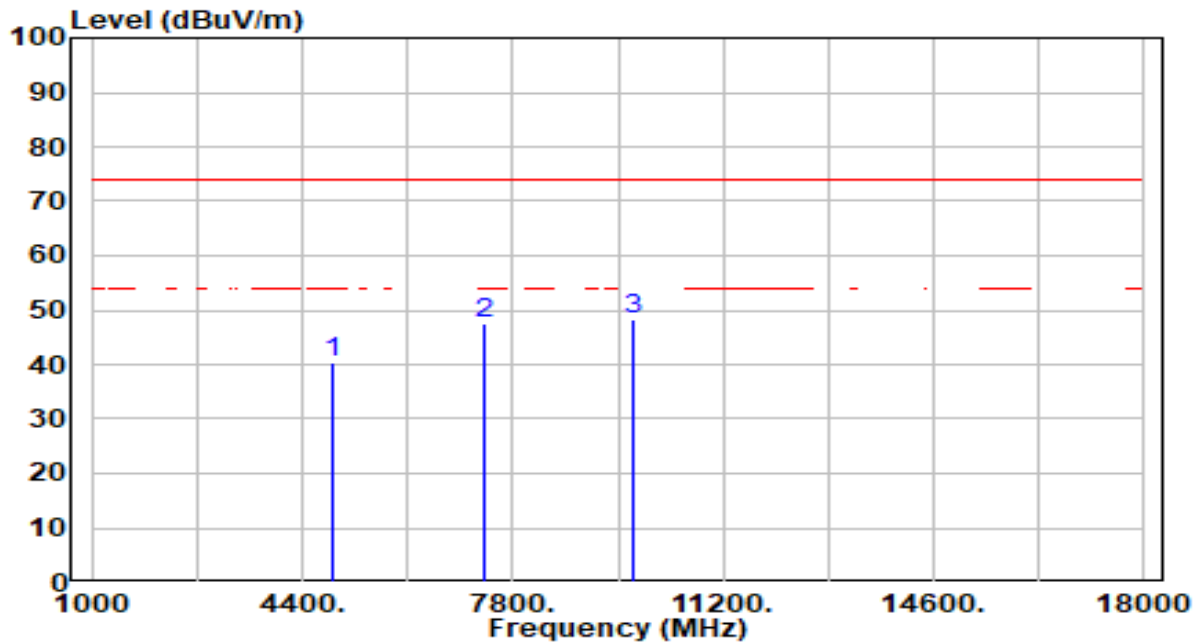


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	38.89	1.49	40.38	-33.62	74.00	100	360	Peak
2	7320.000	39.37	8.03	47.41	-26.59	74.00	300	90	Peak
3	* 9760.000	41.16	7.11	48.26	-25.74	74.00	100	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 39_ANT 0	Test Voltage	AC 120V/60Hz

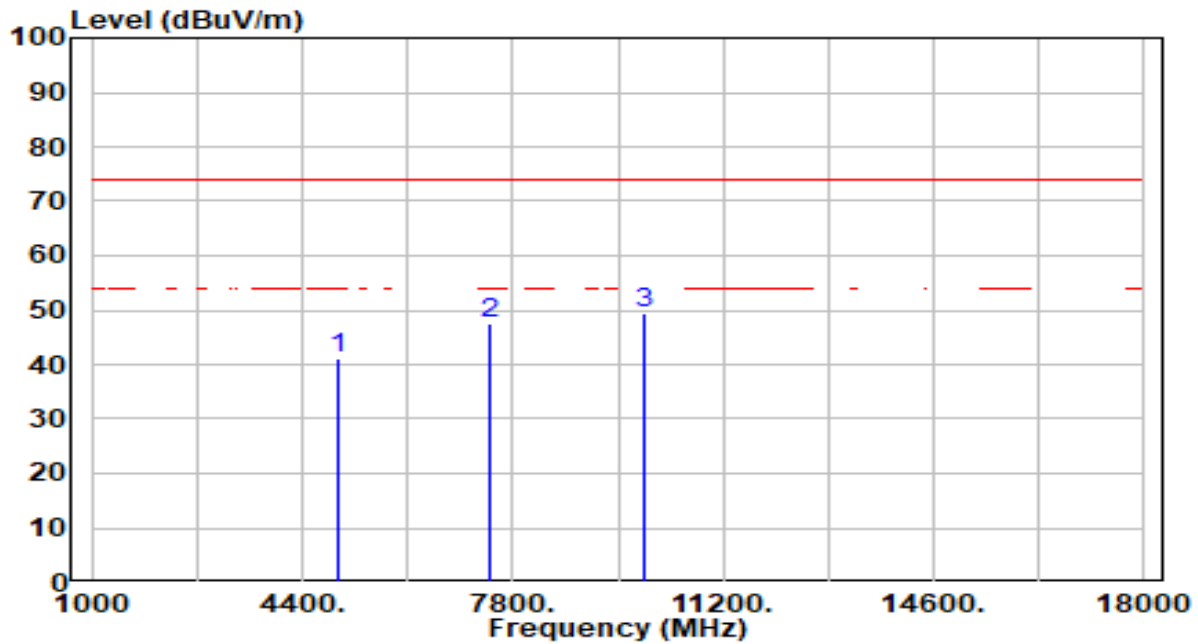


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	39.20	1.75	40.95	-33.05	74.00	100	0	Peak
2	7440.000	39.02	8.35	47.36	-26.64	74.00	100	0	Peak
3	* 9920.000	42.23	7.22	49.45	-24.55	74.00	100	14	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 39_ANT 0	Test Voltage	AC 120V/60Hz

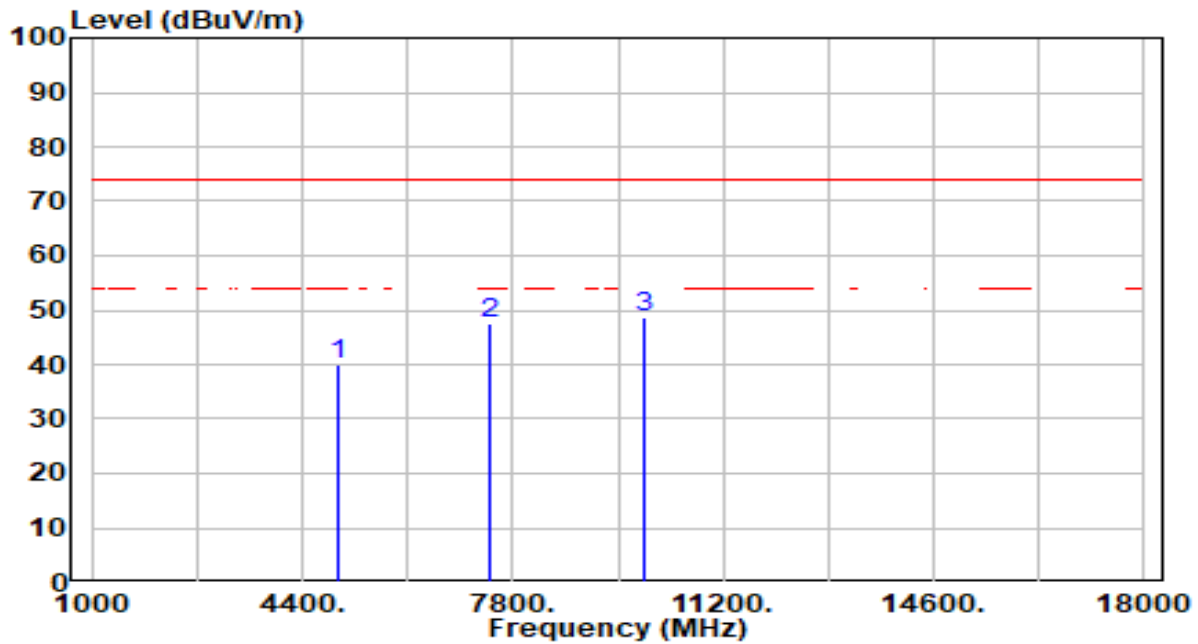


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	38.19	1.75	39.93	-34.07	74.00	100	214	Peak
2	7440.000	39.15	8.35	47.49	-26.51	74.00	100	63	Peak
3	* 9920.000	41.39	7.22	48.61	-25.39	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 0_ANT 0	Test Voltage	AC 120V/60Hz

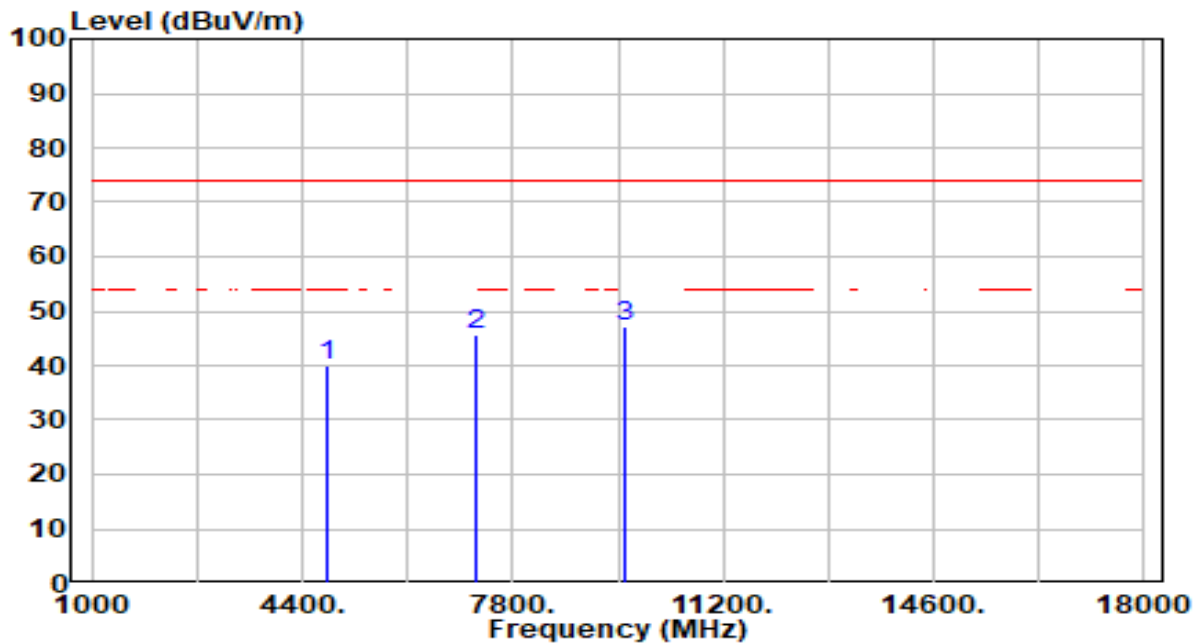


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	38.61	1.32	39.94	-34.06	74.00	100	48	Peak
2	7206.000	38.11	7.66	45.77	-28.23	74.00	100	0	Peak
3	* 9608.000	40.06	7.06	47.13	-26.87	74.00	100	204	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 0_ANT 0	Test Voltage	AC 120V/60Hz

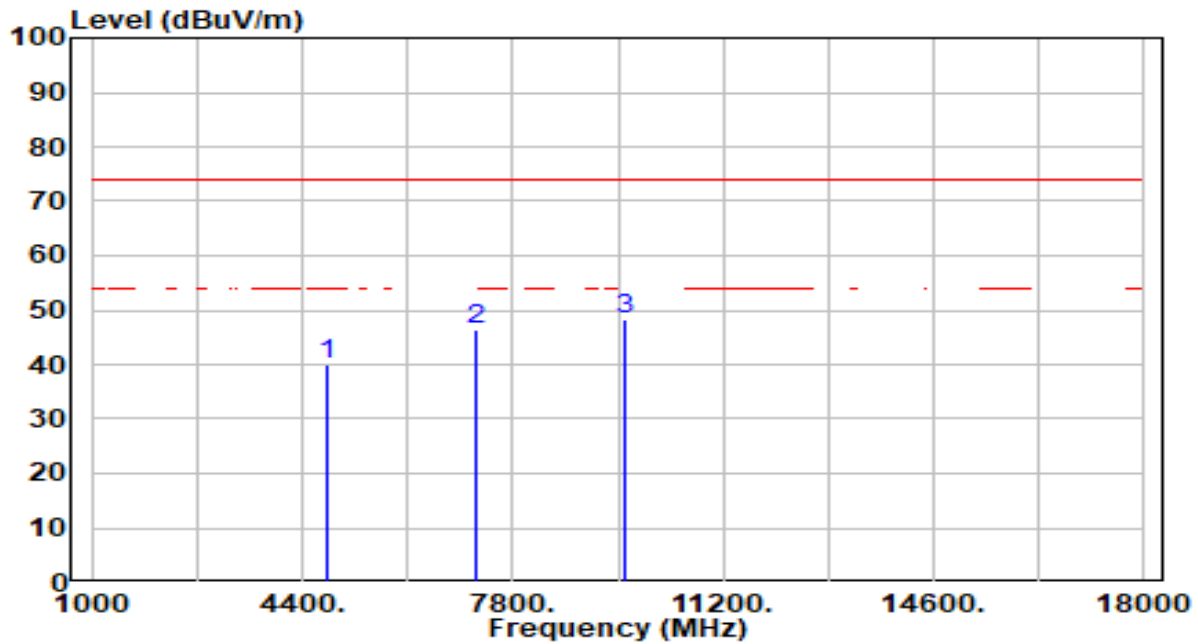


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	38.51	1.32	39.84	-34.16	74.00	100	314	Peak
2	7206.000	38.57	7.66	46.23	-27.77	74.00	100	148	Peak
3	* 9608.000	41.39	7.06	48.46	-25.54	74.00	100	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 19_ANT 0	Test Voltage	AC 120V/60Hz

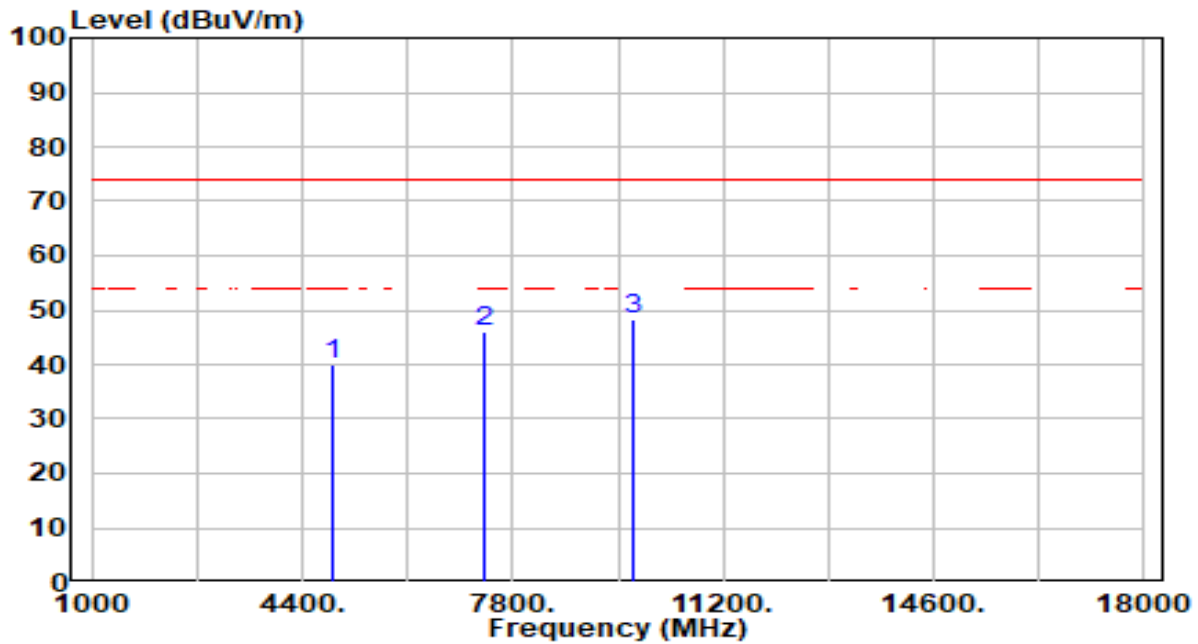


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	38.44	1.49	39.93	-34.07	74.00	100	75	Peak
2	7320.000	38.03	8.03	46.07	-27.93	74.00	100	20	Peak
3	* 9760.000	41.31	7.11	48.41	-25.59	74.00	100	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 19_ANT 0	Test Voltage	AC 120V/60Hz

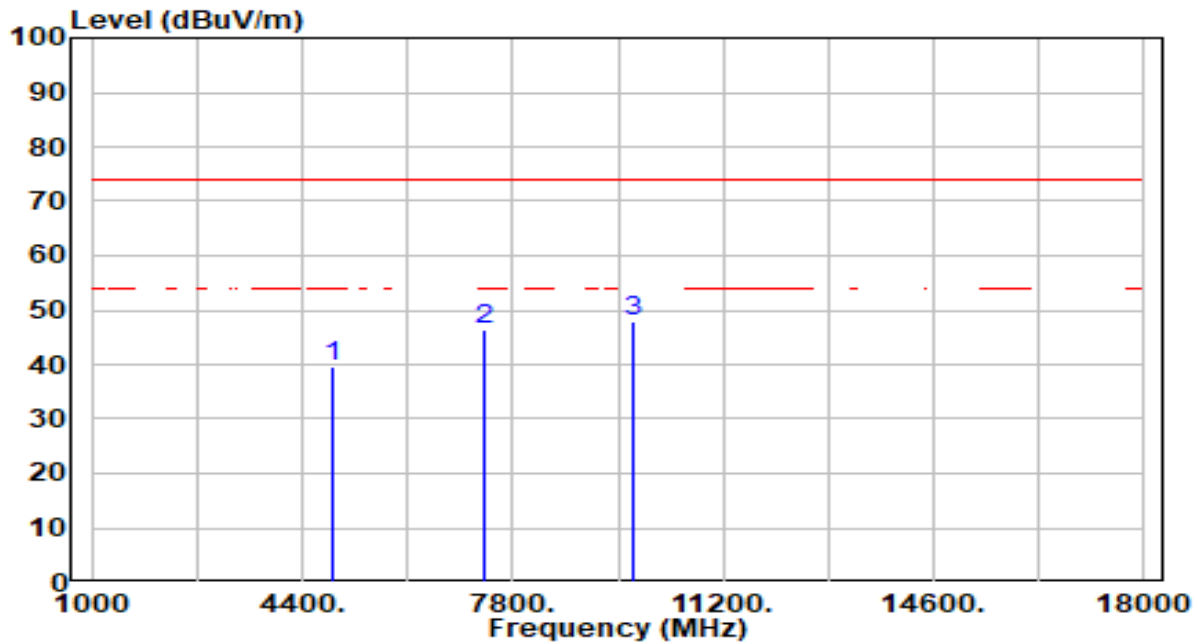


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	38.22	1.49	39.71	-34.29	74.00	100	183	Peak
2	7320.000	38.42	8.03	46.45	-27.55	74.00	100	19	Peak
3	* 9760.000	40.93	7.11	48.03	-25.97	74.00	100	143	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 39_ANT 0	Test Voltage	AC 120V/60Hz

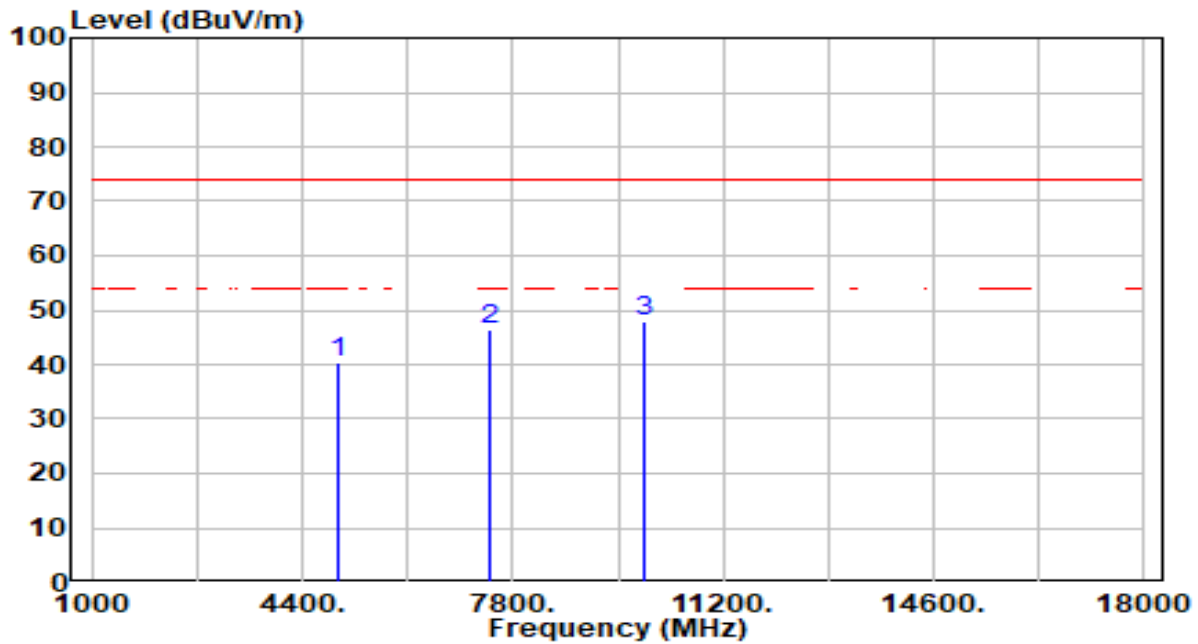


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	38.52	1.75	40.27	-33.73	74.00	100	111	Peak
2	7440.000	38.24	8.35	46.59	-27.41	74.00	100	28	Peak
3	* 9920.000	40.77	7.22	47.99	-26.01	74.00	100	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 39_ANT 0	Test Voltage	AC 120V/60Hz

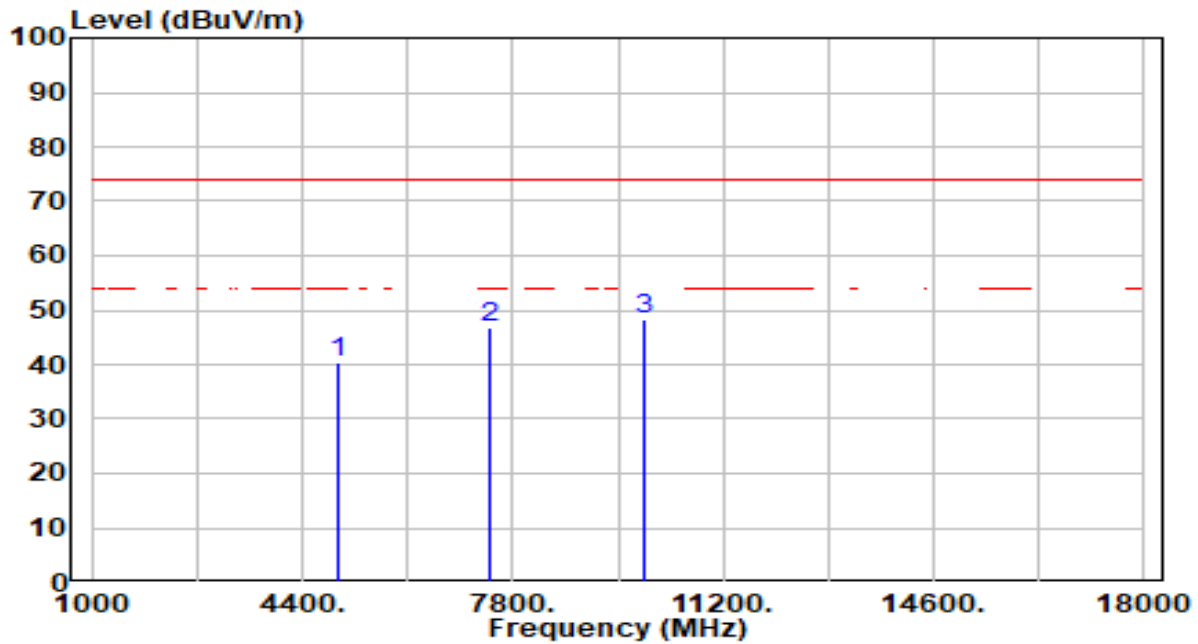


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	38.47	1.75	40.22	-33.78	74.00	100	249	Peak
2	7440.000	38.28	8.35	46.63	-27.37	74.00	100	232	Peak
3	* 9920.000	41.19	7.22	48.41	-25.59	74.00	100	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 0_ANT 1	Test Voltage	AC 120V/60Hz

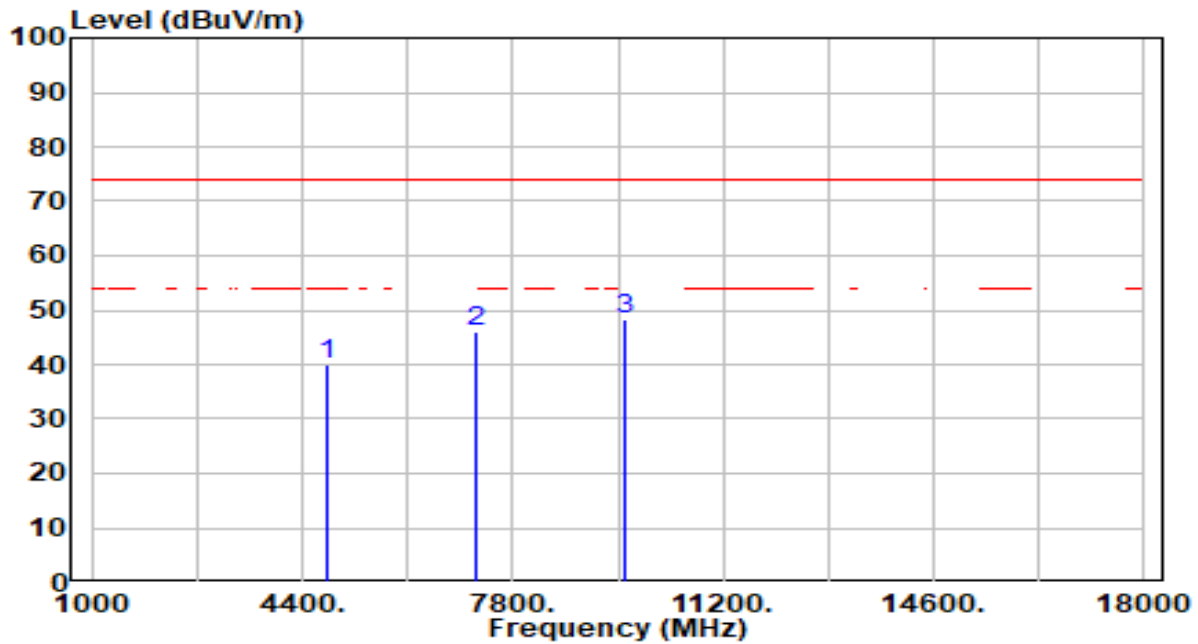


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	38.79	1.32	40.11	-33.89	74.00	100	99	Peak
2	7206.000	38.47	7.66	46.13	-27.87	74.00	100	44	Peak
3	* 9608.000	41.20	7.06	48.26	-25.74	74.00	100	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 0_ANT 1	Test Voltage	AC 120V/60Hz

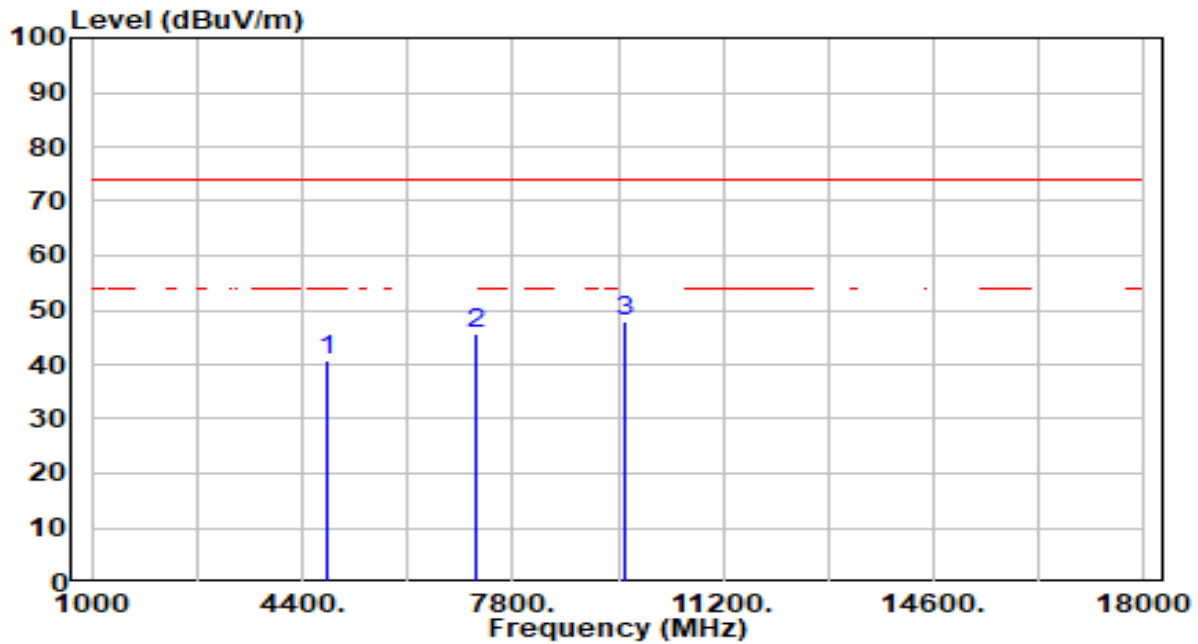


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	39.56	1.32	40.89	-33.11	74.00	100	27	Peak
2	7206.000	38.00	7.66	45.66	-28.34	74.00	100	360	Peak
3	* 9608.000	40.68	7.06	47.75	-26.25	74.00	100	88	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 1	Test Voltage	AC 120V/60Hz

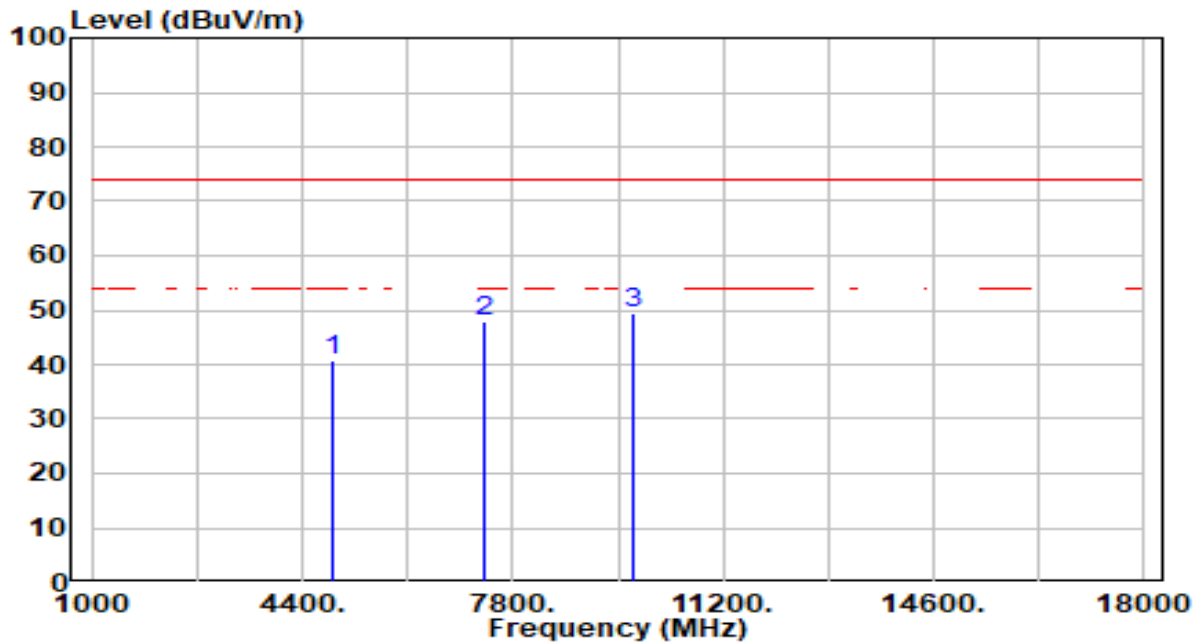


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	39.15	1.49	40.64	-33.36	74.00	200	191	Peak
2	7320.000	39.82	8.03	47.86	-26.14	74.00	100	314	Peak
3	* 9760.000	42.34	7.11	49.44	-24.56	74.00	239	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 1	Test Voltage	AC 120V/60Hz

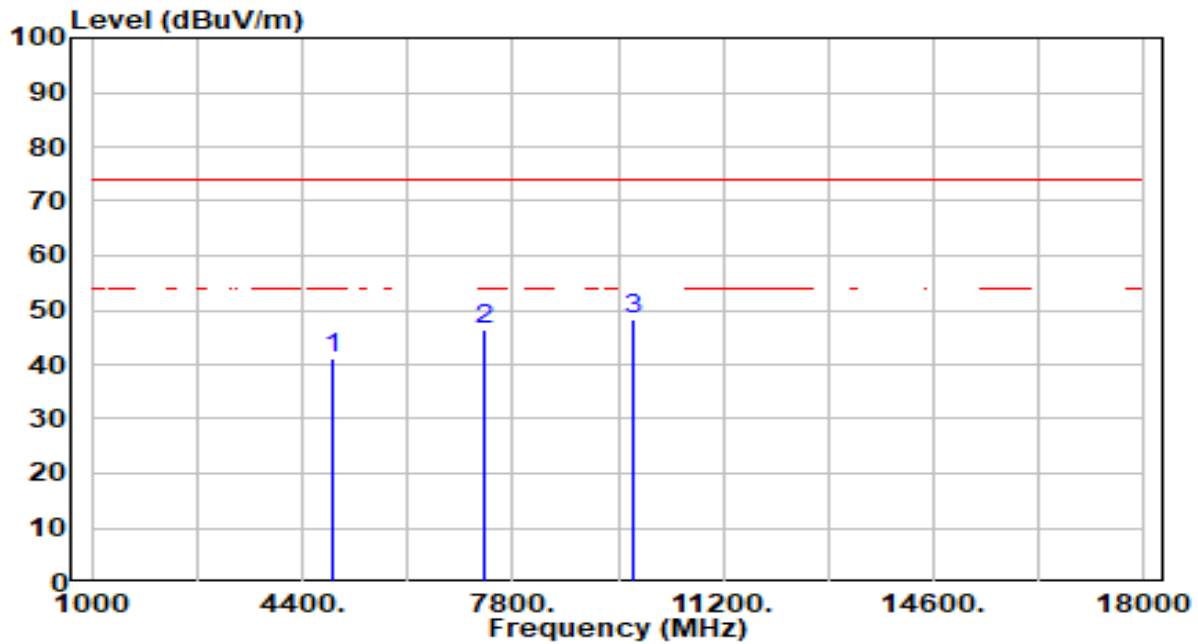


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	39.82	1.49	41.31	-32.69	74.00	300	287	Peak
2	7320.000	38.50	8.03	46.53	-27.47	74.00	300	224	Peak
3	* 9760.000	41.28	7.11	48.38	-25.62	74.00	300	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 39_ANT 1	Test Voltage	AC 120V/60Hz

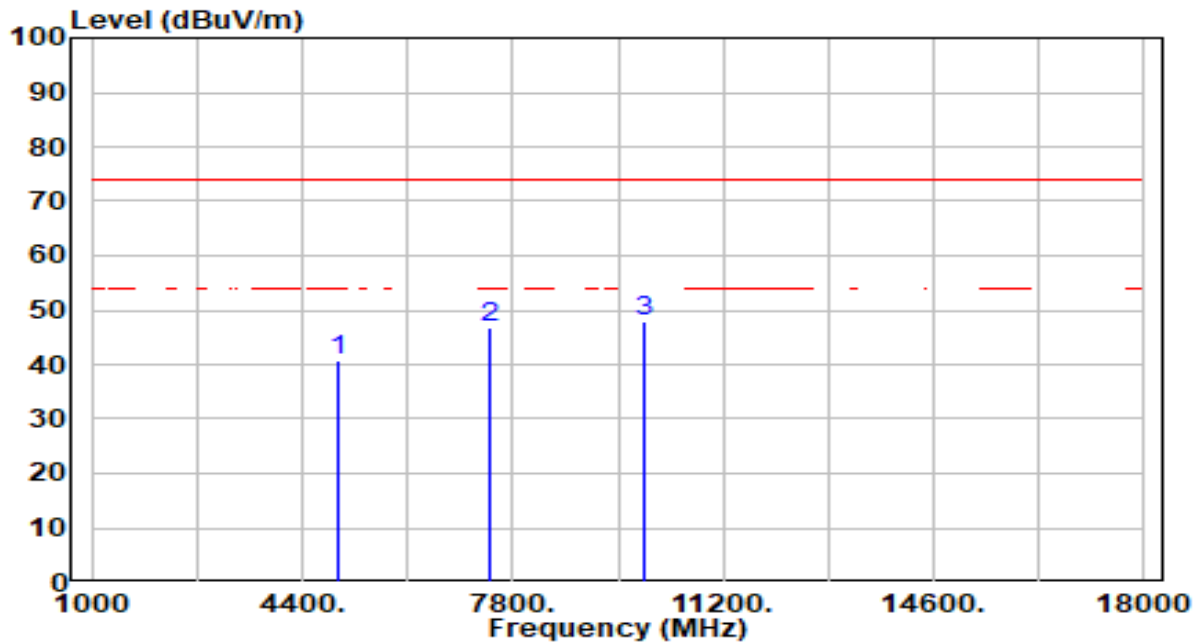


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	39.10	1.75	40.85	-33.15	74.00	100	99	Peak
2	7440.000	38.38	8.35	46.73	-27.27	74.00	100	11	Peak
3	* 9920.000	40.74	7.22	47.95	-26.05	74.00	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 39_ANT 1	Test Voltage	AC 120V/60Hz

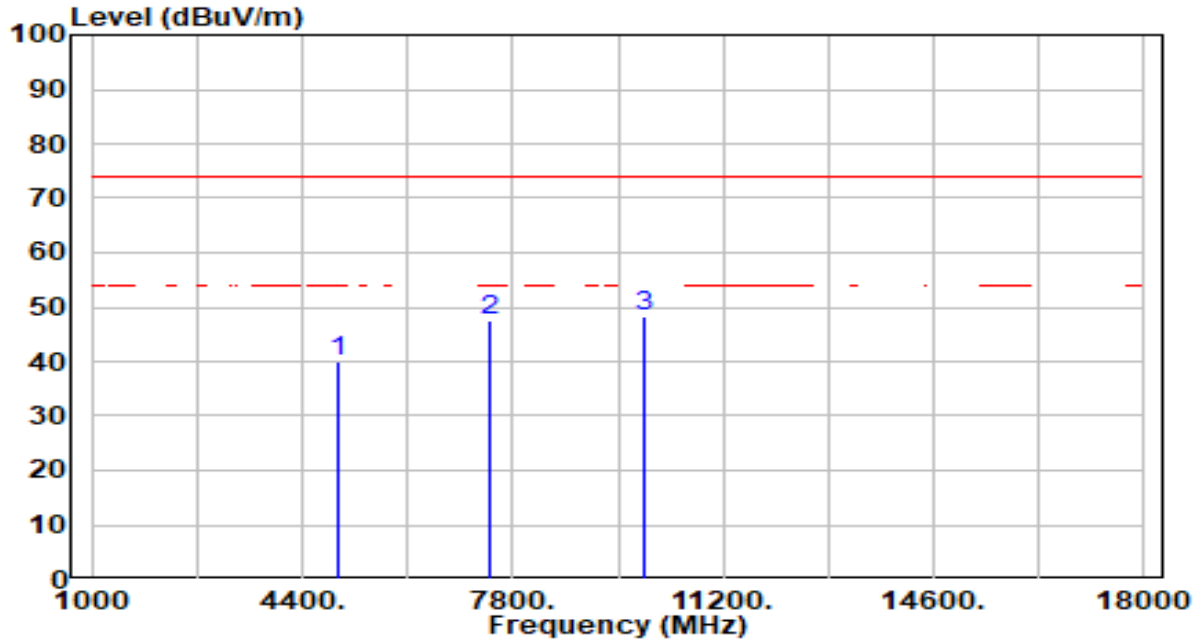


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	38.40	1.75	40.14	-33.86	74.00	100	130	Peak
2	7440.000	39.06	8.35	47.40	-26.60	74.00	100	145	Peak
3	* 9920.000	41.19	7.22	48.41	-25.59	74.00	100	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 0_ANT 1	Test Voltage	AC 120V/60Hz

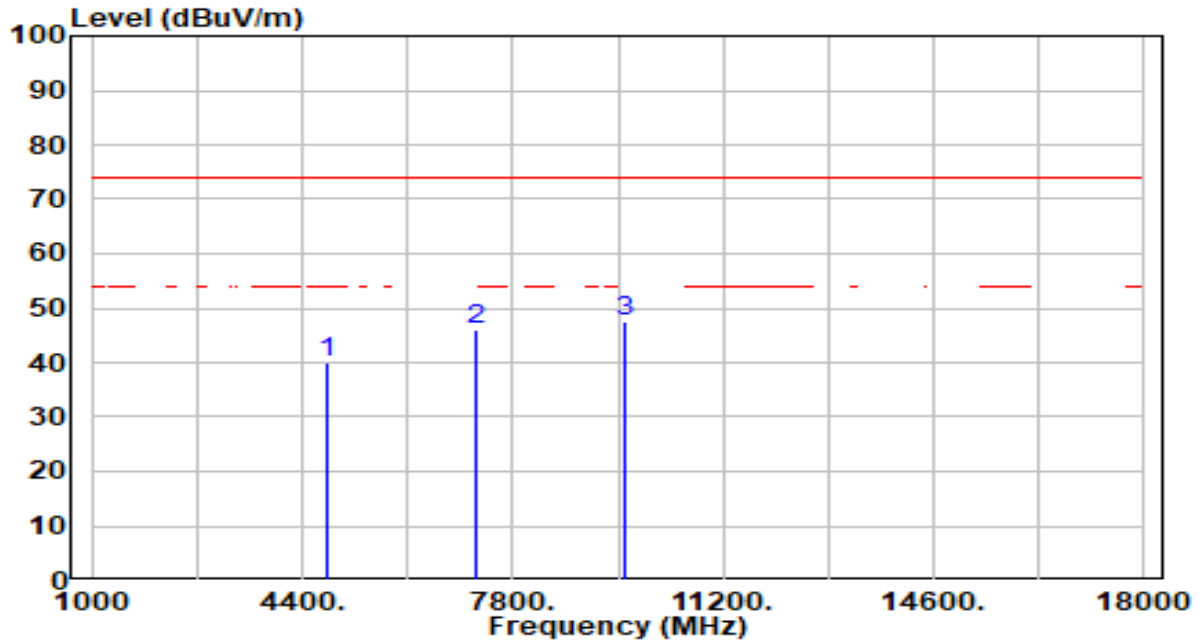


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	38.77	1.32	40.10	-33.90	74.00	100	26	Peak
2	7206.000	38.27	7.66	45.93	-28.07	74.00	100	96	Peak
3	* 9608.000	40.53	7.06	47.59	-26.41	74.00	100	128	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 0_ANT 1	Test Voltage	AC 120V/60Hz

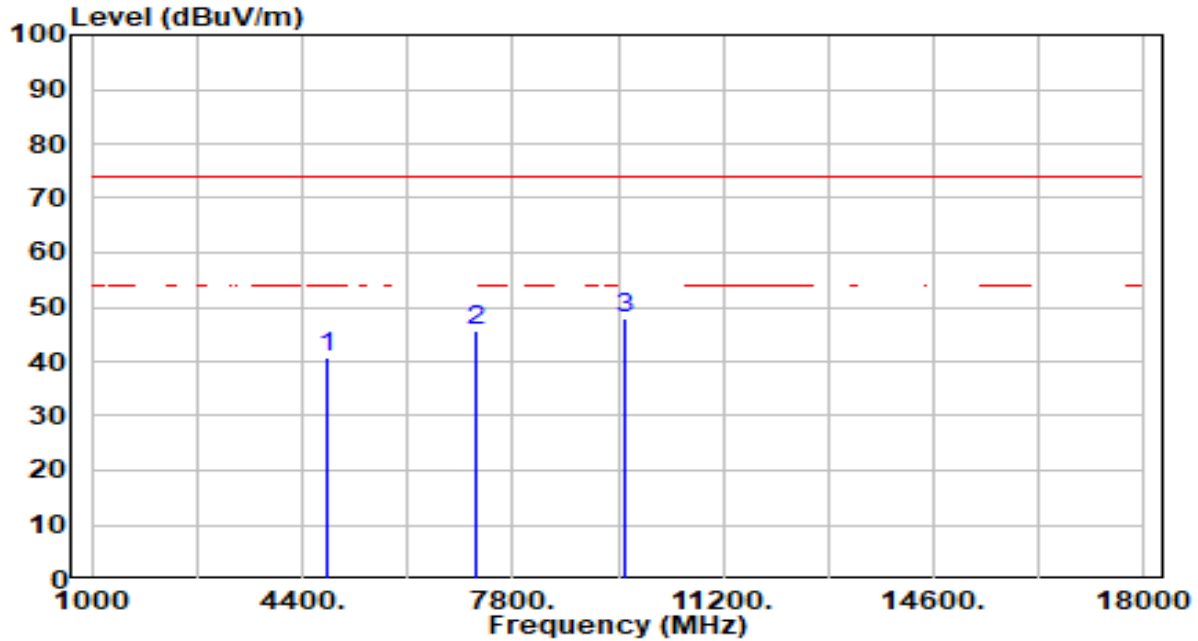


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	39.41	1.32	40.73	-33.27	74.00	100	79	Peak
2	7206.000	38.01	7.66	45.67	-28.33	74.00	100	270	Peak
3	* 9608.000	40.69	7.06	47.75	-26.25	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 19_ANT 1	Test Voltage	AC 120V/60Hz

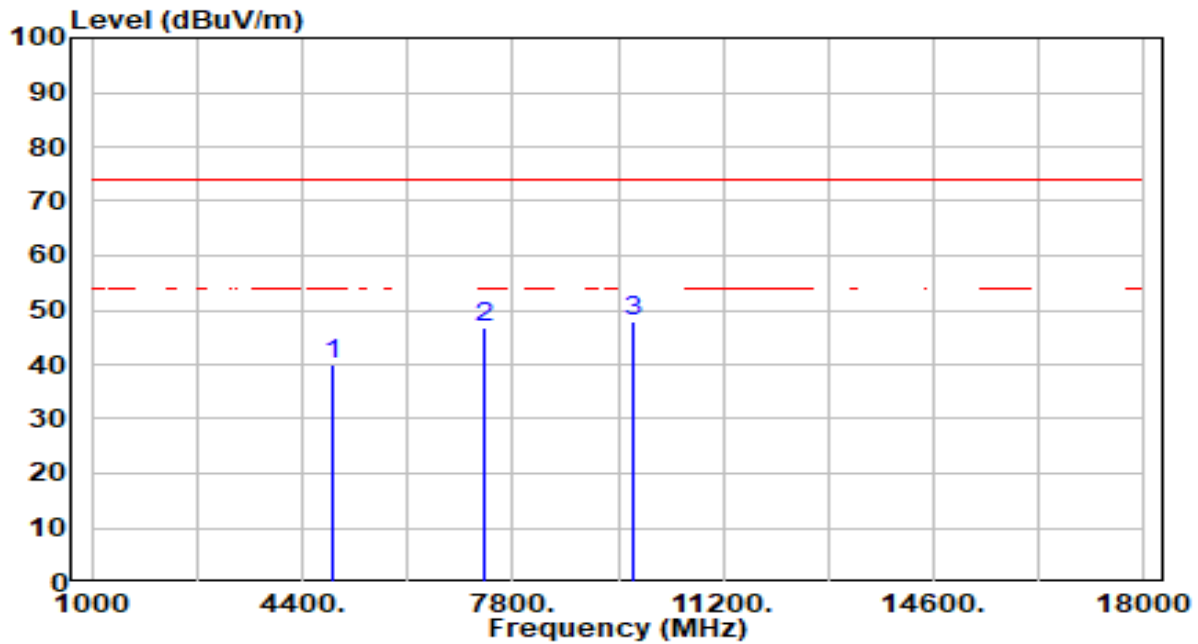


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	38.37	1.49	39.85	-34.15	74.00	100	135	Peak
2	7320.000	38.76	8.03	46.80	-27.20	74.00	100	0	Peak
3	* 9760.000	40.93	7.11	48.04	-25.96	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 19_ANT 1	Test Voltage	AC 120V/60Hz

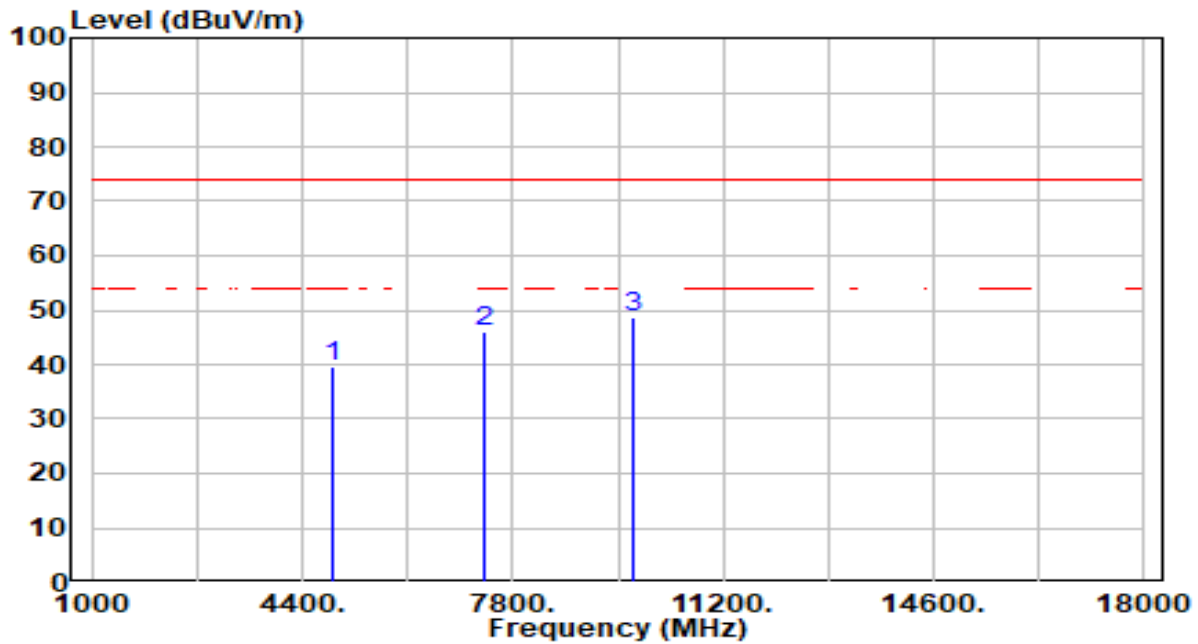


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	38.22	1.49	39.71	-34.29	74.00	100	148	Peak
2	7320.000	38.17	8.03	46.20	-27.80	74.00	100	90	Peak
3	* 9760.000	41.53	7.11	48.64	-25.36	74.00	100	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 39_ANT 1	Test Voltage	AC 120V/60Hz

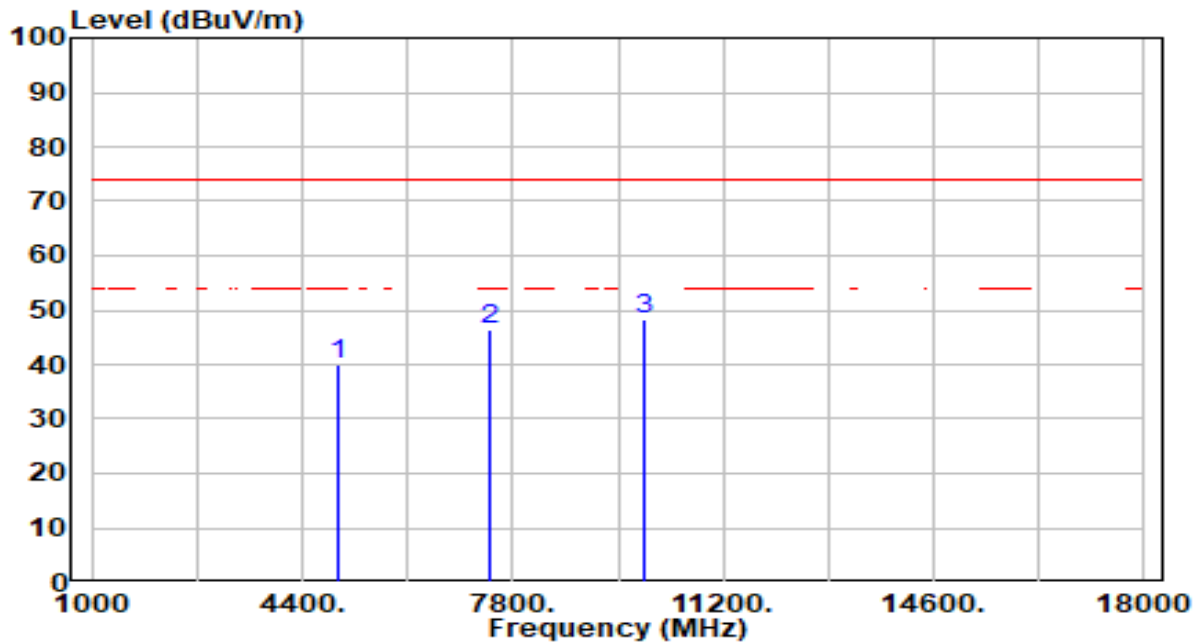


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	38.34	1.75	40.09	-33.91	74.00	100	154	Peak
2	7440.000	38.05	8.35	46.40	-27.60	74.00	100	90	Peak
3	* 9920.000	41.18	7.22	48.40	-25.60	74.00	100	96	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 39_ANT 1	Test Voltage	AC 120V/60Hz

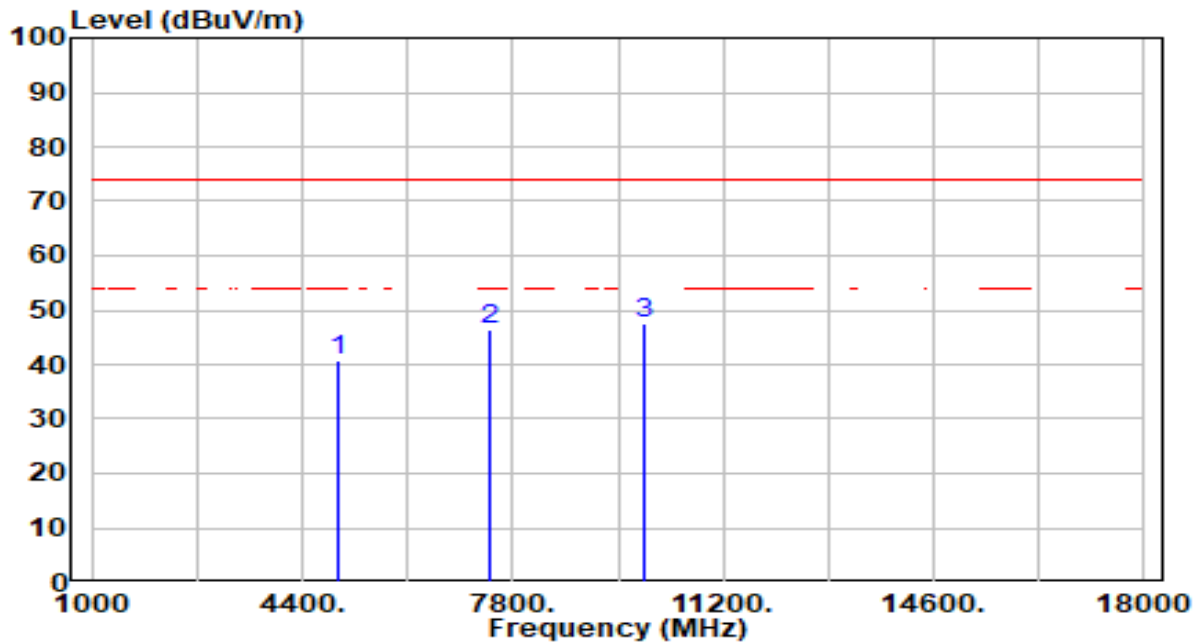


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	38.85	1.75	40.60	-33.40	74.00	100	183	Peak
2	7440.000	37.97	8.35	46.31	-27.69	74.00	100	69	Peak
3	* 9920.000	40.47	7.22	47.69	-26.31	74.00	100	78	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	BBHA 9170	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 0	Test Voltage	AC 120V/60Hz

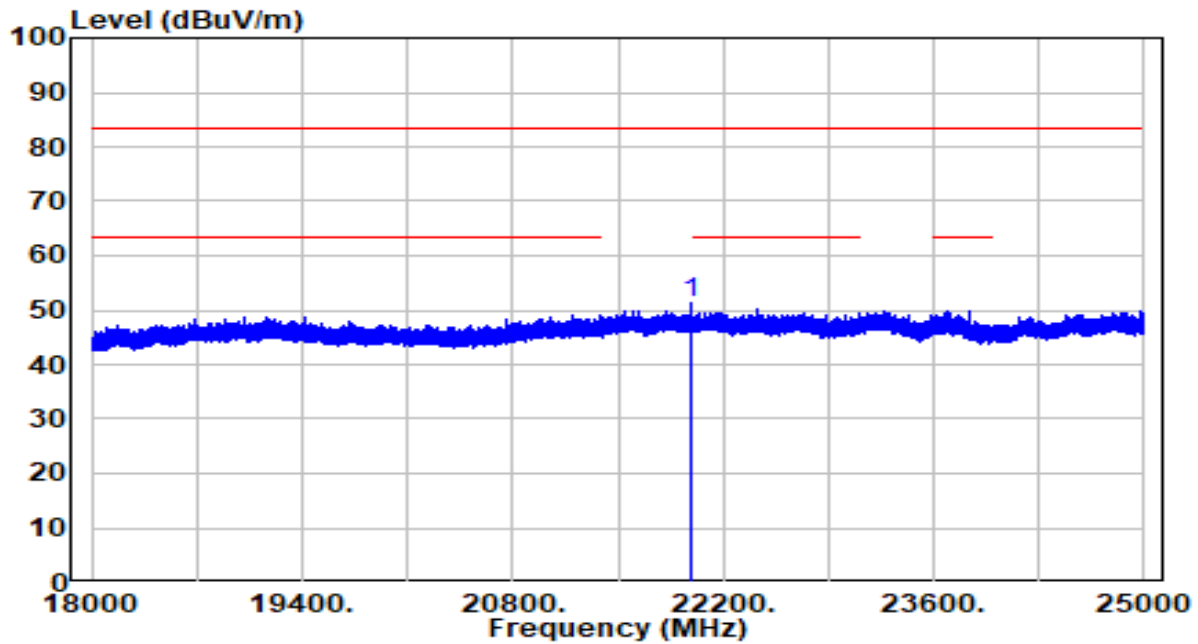


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	21985.410	36.80	14.34	51.13	-32.37	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	BBHA 9170	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 0	Test Voltage	AC 120V/60Hz

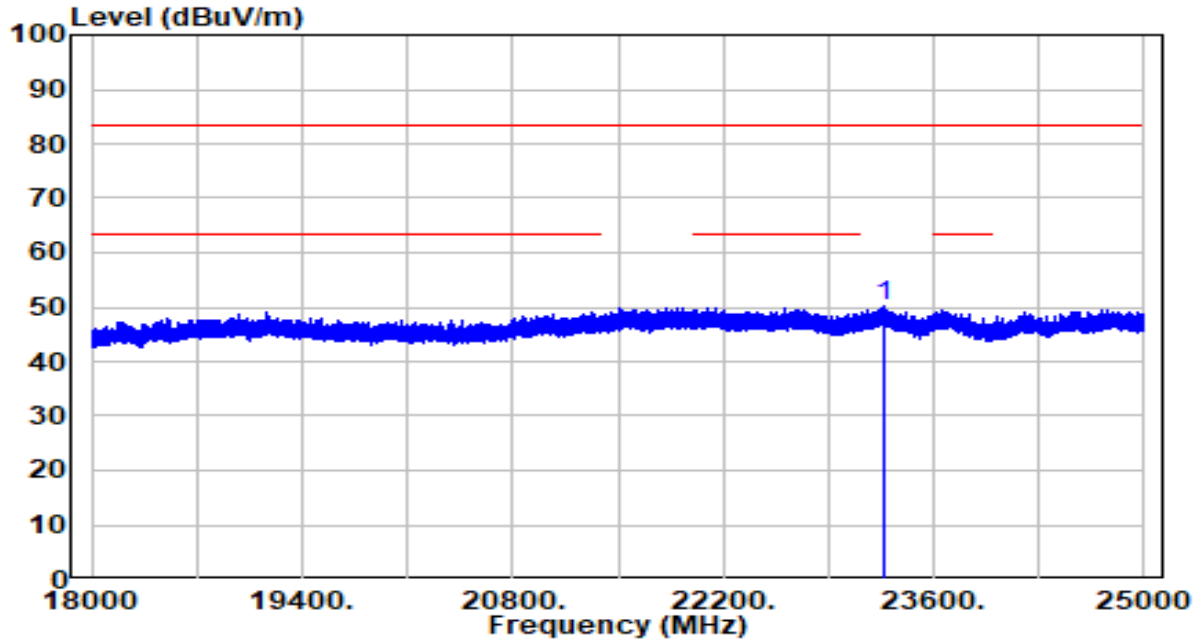


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 23262.030	34.48	15.56	50.04	-33.46	83.50	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	BBHA 9170	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 1	Test Voltage	AC 120V/60Hz

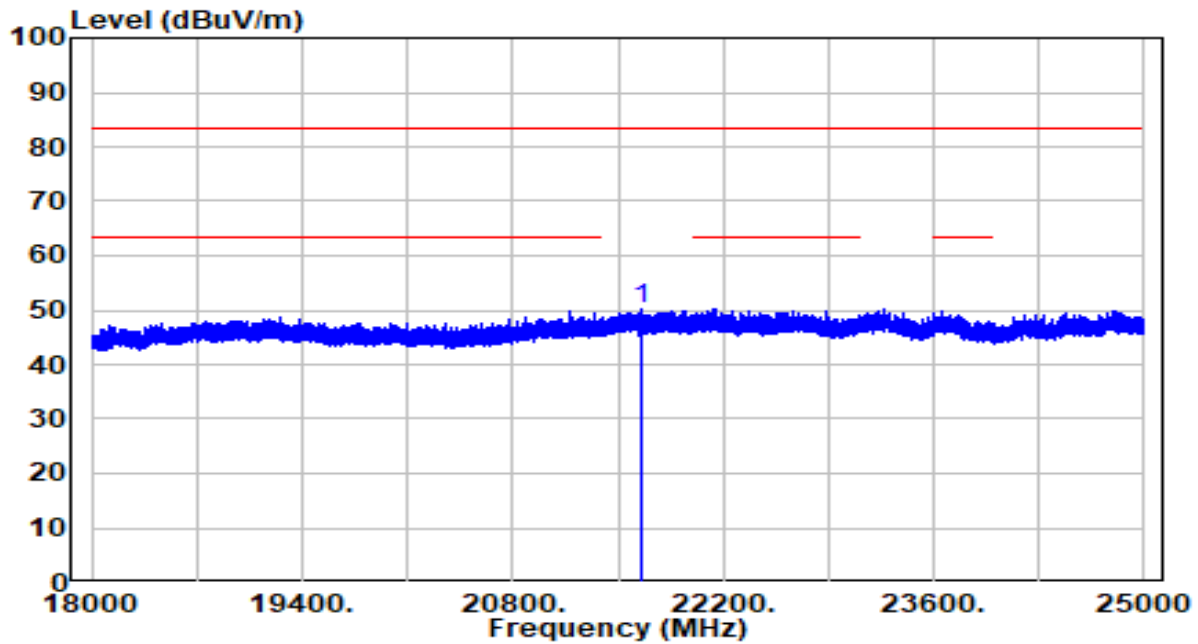


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	21650.280	36.13	14.22	50.34	-33.16	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	BBHA 9170	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 19_ANT 1	Test Voltage	AC 120V/60Hz

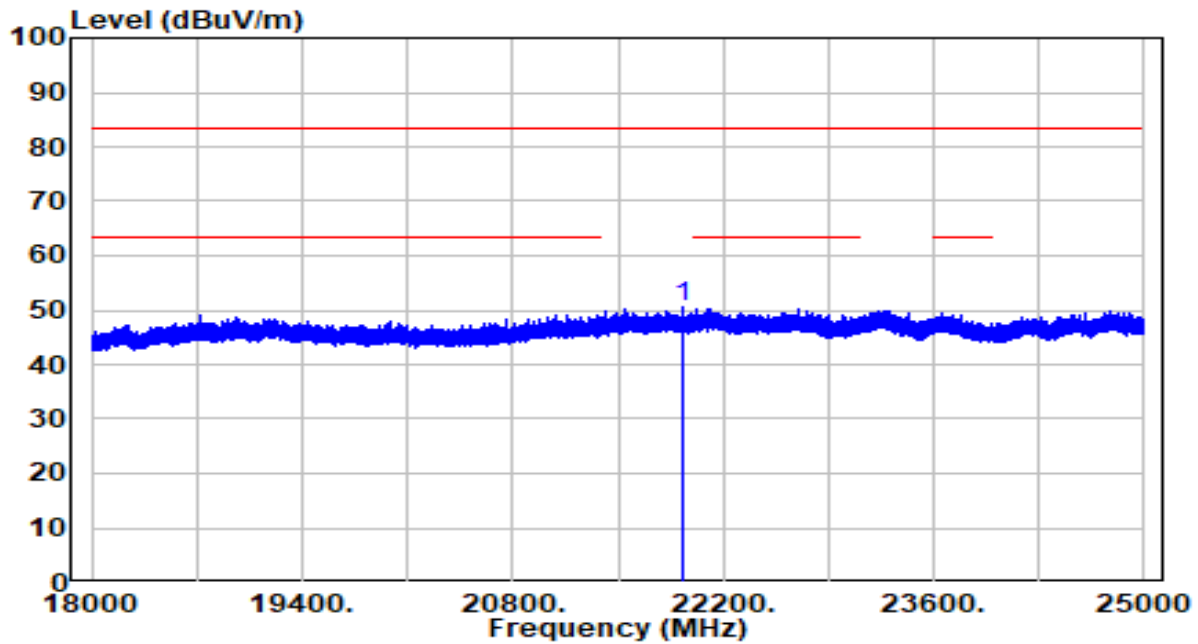

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	21939.250	36.17	14.32	50.49	-33.01	83.50	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.13

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

1GHz ~ 25GHz Test Setup:

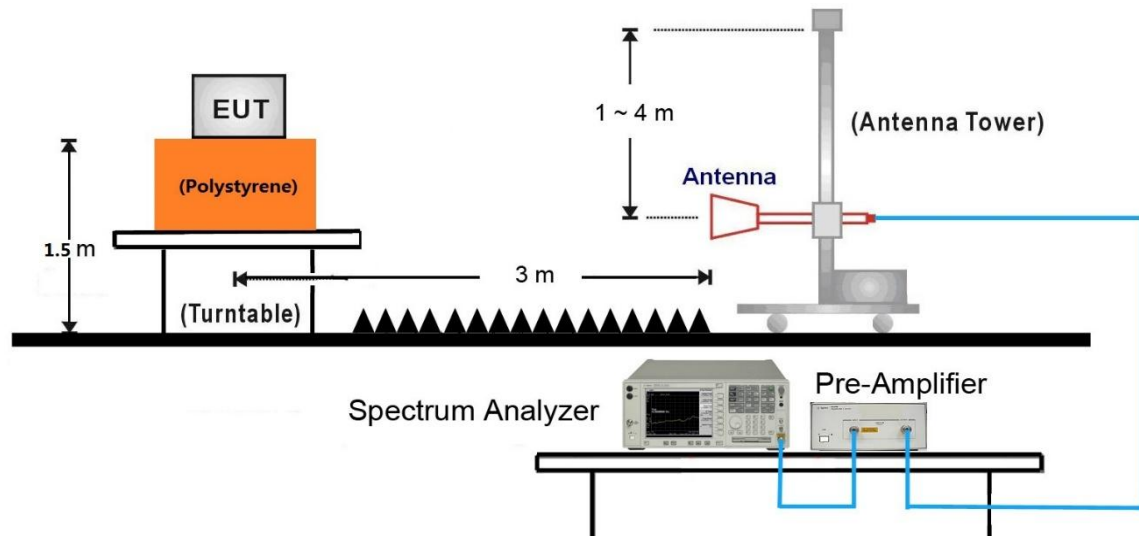

7.7.5. Test Result

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 0_ANT 0	Test Voltage	AC 120V/60Hz

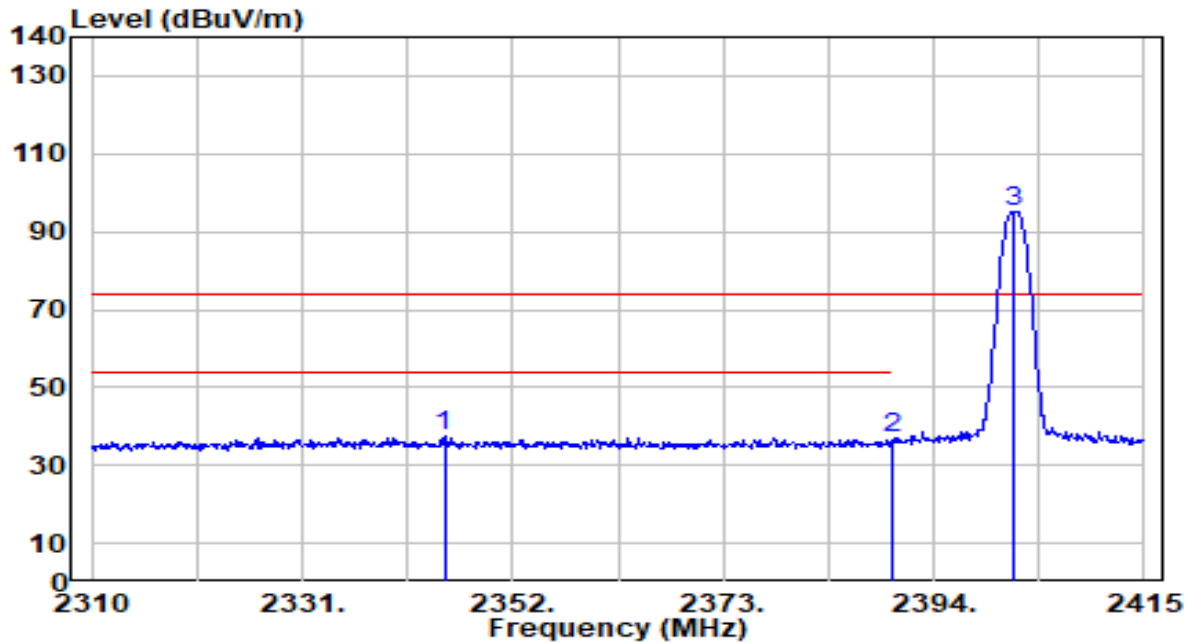


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2345.175	42.06	-4.61	37.45	-36.55	74.00	332	43	Peak
2		2390.000	41.48	-4.54	36.94	-37.06	74.00	332	43	Peak
3		2402.085	99.84	-4.52	95.32	N/A	N/A	332	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 0_ANT 0	Test Voltage	AC 120V/60Hz

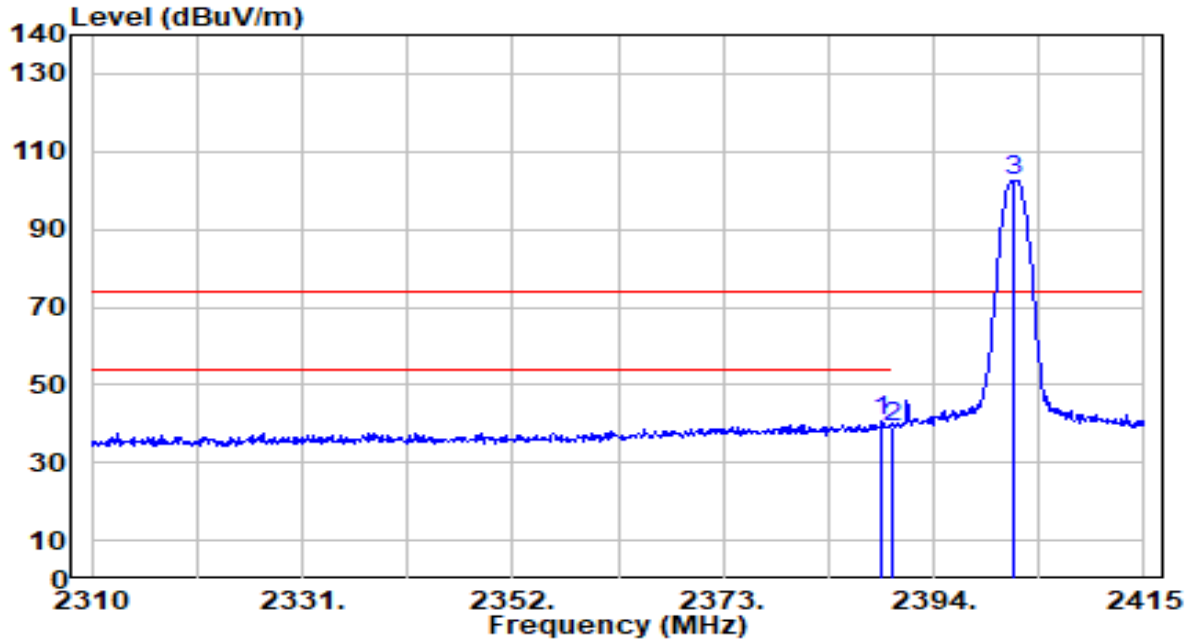


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.855	45.43	-4.54	40.89	-33.11	74.00	213	152	Peak
2		2390.000	43.84	-4.54	39.30	-34.70	74.00	213	152	Peak
3		2402.085	107.00	-4.52	102.48	N/A	N/A	213	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 39_ANT 0	Test Voltage	AC 120V/60Hz

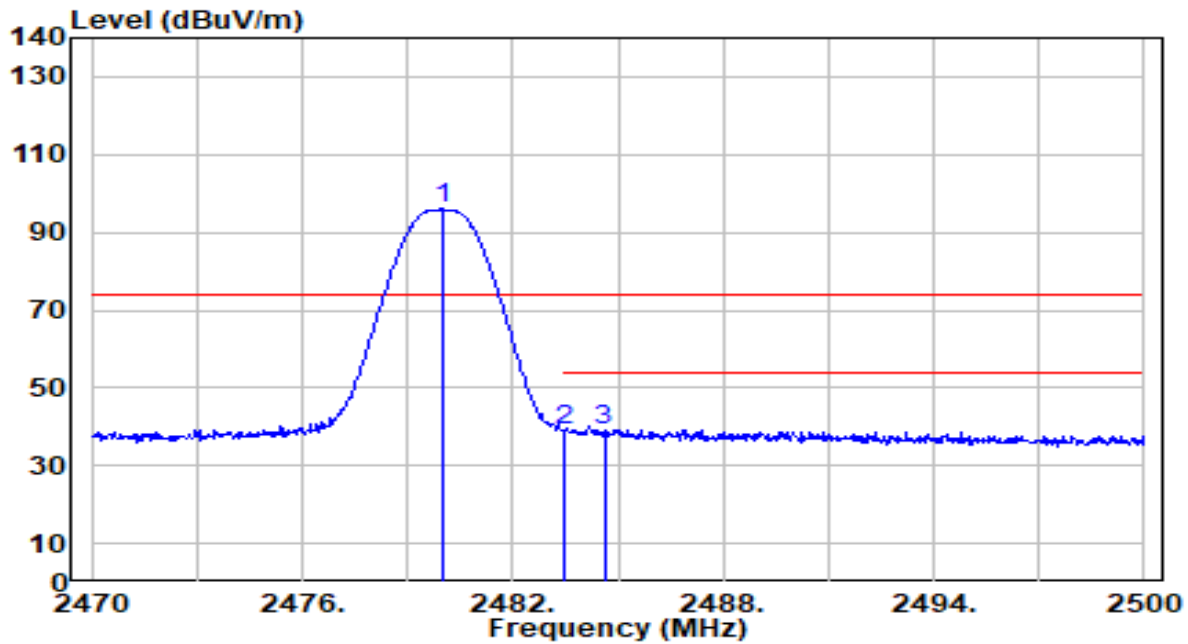


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.990	100.23	-4.32	95.91	N/A	N/A	347	77	Peak
2	2483.500	43.27	-4.31	38.95	-35.05	74.00	347	77	Peak
3	* 2484.610	43.63	-4.31	39.32	-34.68	74.00	347	77	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 39_ANT 0	Test Voltage	AC 120V/60Hz

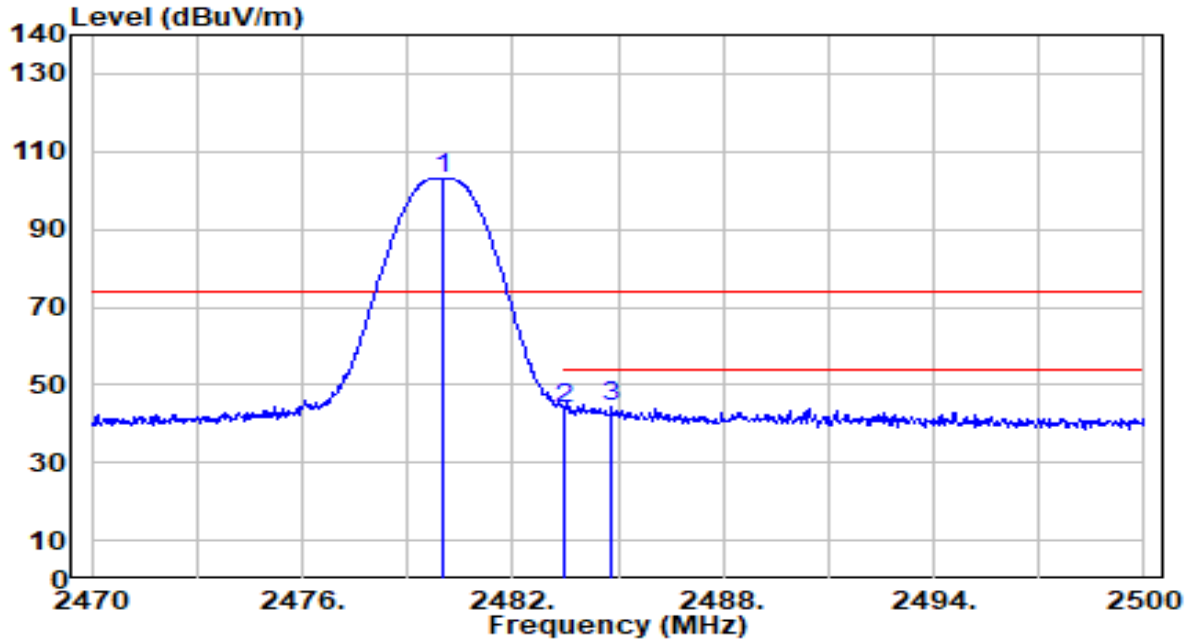


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.990	107.39	-4.32	103.07	N/A	N/A	202	133	Peak
2	2483.500	48.05	-4.31	43.74	-30.26	74.00	202	133	Peak
3	* 2484.820	48.42	-4.31	44.11	-29.89	74.00	202	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 0_ANT 0	Test Voltage	AC 120V/60Hz

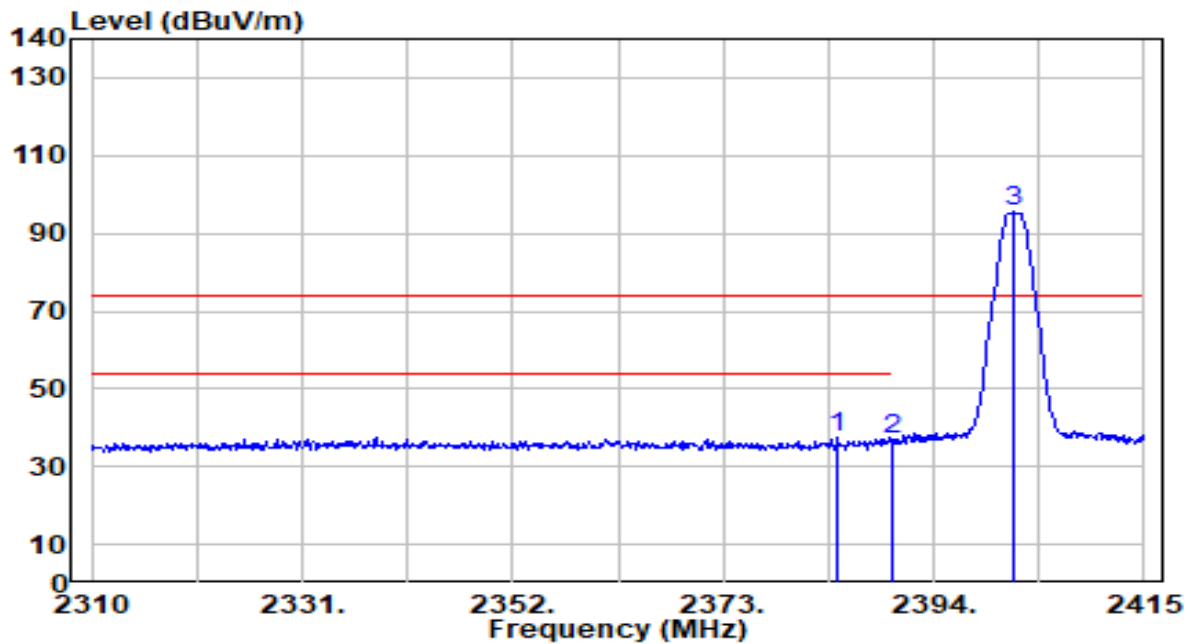


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.445	41.83	-4.55	37.28	-36.72	74.00	332	43	Peak
2		2390.000	41.63	-4.54	37.09	-36.91	74.00	332	43	Peak
3		2402.085	99.88	-4.52	95.36	N/A	N/A	332	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 0_ANT 0	Test Voltage	AC 120V/60Hz

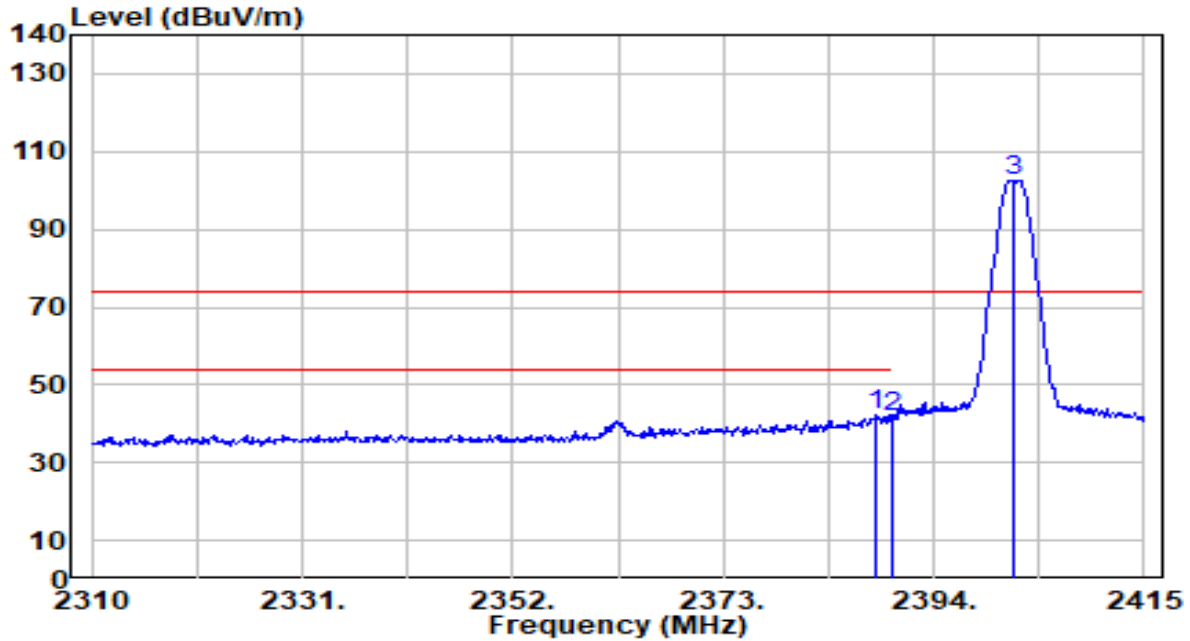


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.330	46.61	-4.54	42.07	-31.93	74.00	213	152	Peak
2	2390.000	46.06	-4.54	41.52	-32.48	74.00	213	152	Peak
3	2402.085	107.12	-4.52	102.60	N/A	N/A	213	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 39_ANT 0	Test Voltage	AC 120V/60Hz

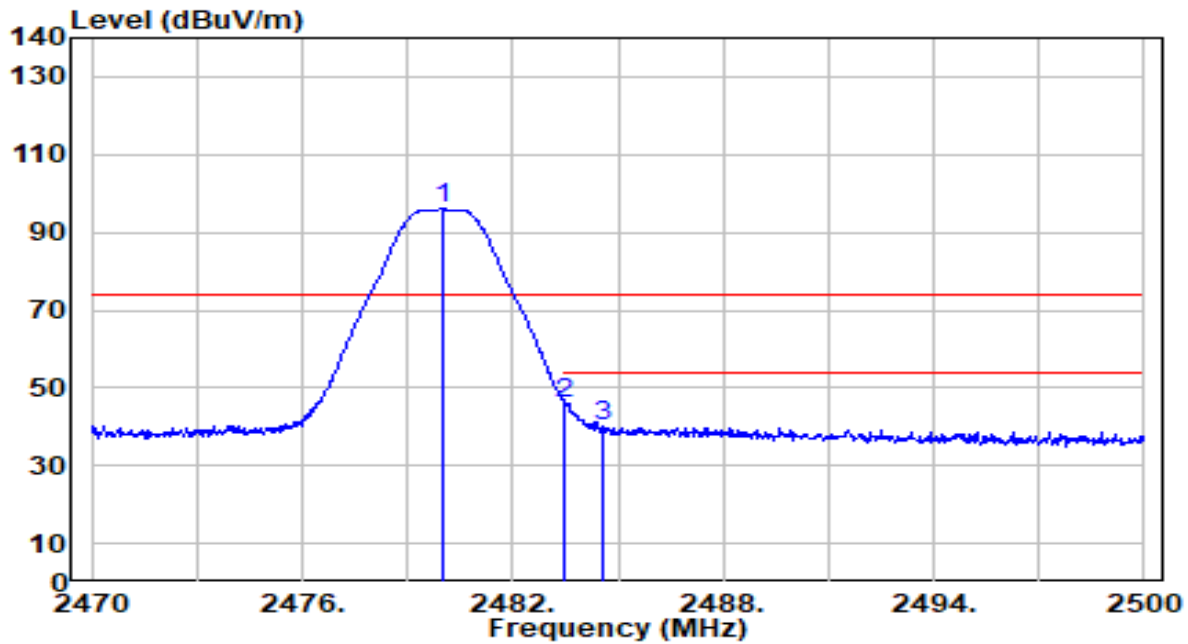


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.990	100.28	-4.32	95.95	N/A	N/A	347	77	Peak
2	* 2483.500	50.15	-4.31	45.84	-28.16	74.00	347	77	Peak
3	2484.580	44.44	-4.31	40.13	-33.87	74.00	347	77	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 39_ANT 0	Test Voltage	AC 120V/60Hz

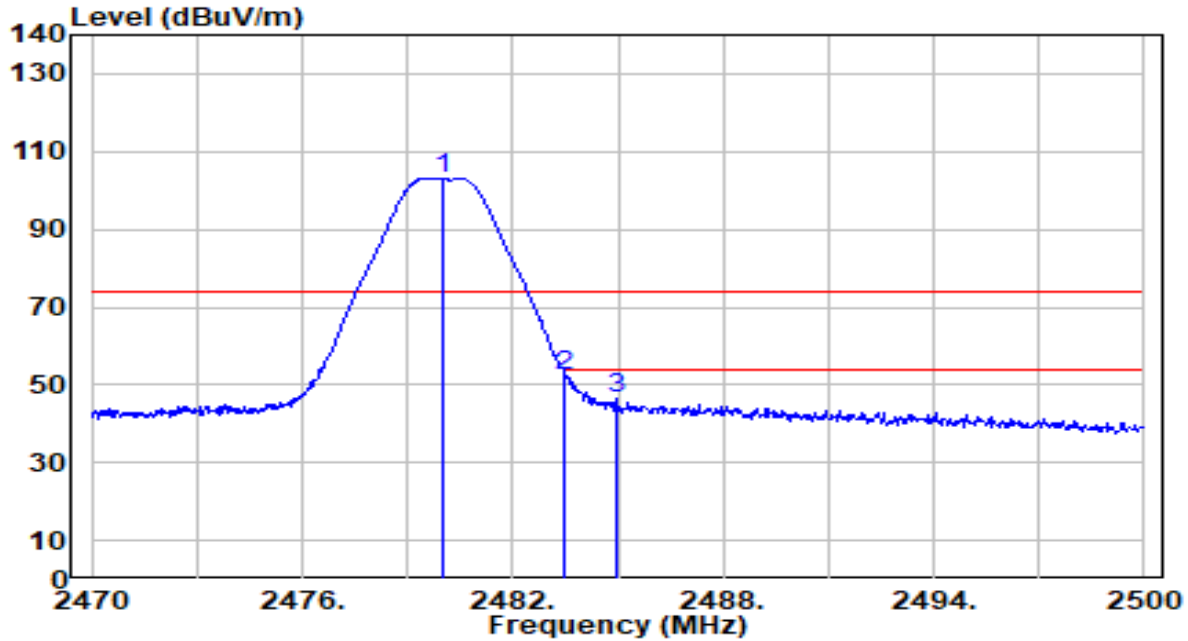


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.020	107.50	-4.32	103.18	N/A	N/A	202	133	Peak
2	* 2483.500	56.63	-4.31	52.32	-21.68	74.00	202	133	Peak
3	2484.940	50.54	-4.31	46.23	-27.77	74.00	202	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 0_ANT 1	Test Voltage	AC 120V/60Hz

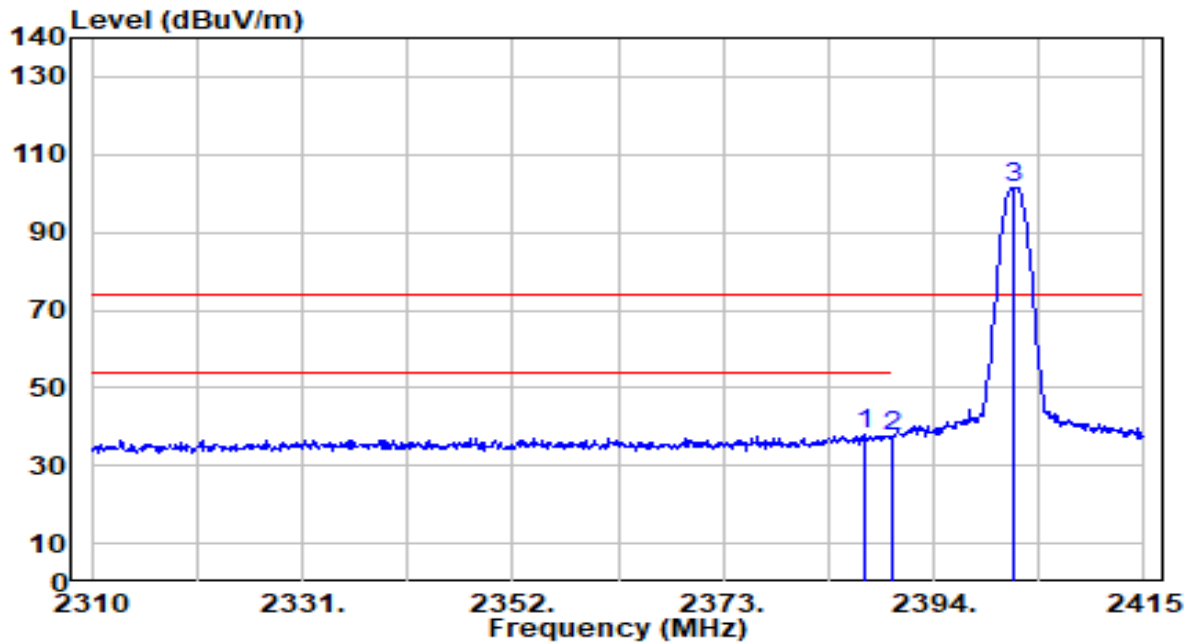


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.070	42.37	-4.55	37.82	-36.18	74.00	181	184	Peak
2	2390.000	42.24	-4.54	37.70	-36.30	74.00	181	184	Peak
3	2402.085	105.91	-4.52	101.39	N/A	N/A	181	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 0_ANT 1	Test Voltage	AC 120V/60Hz

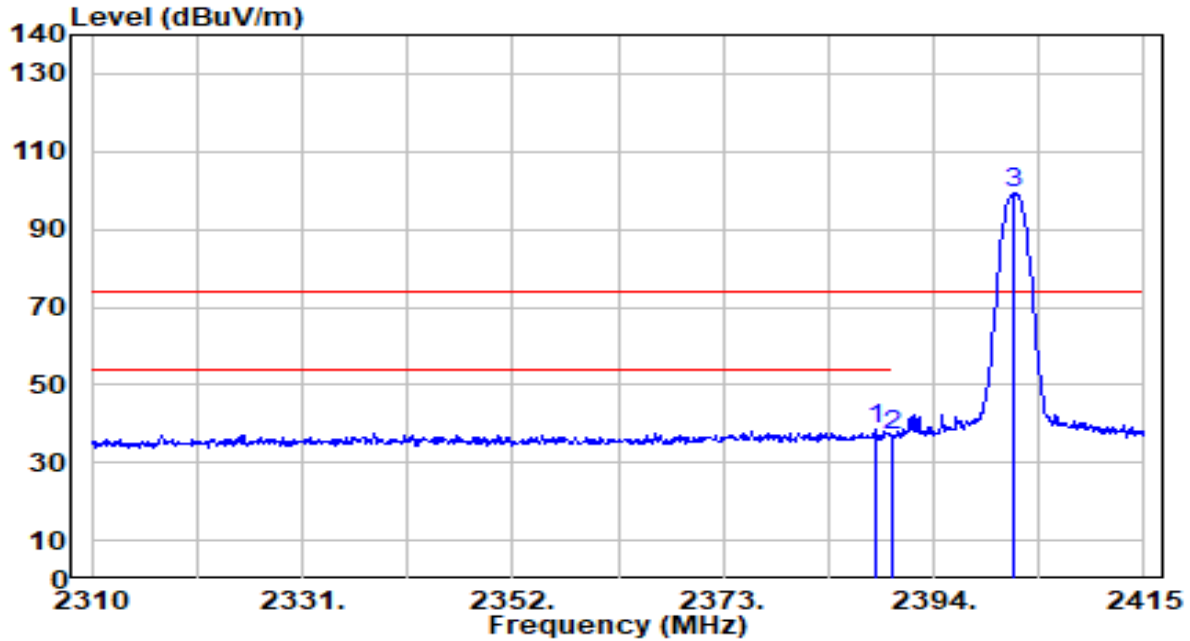


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.330	42.99	-4.54	38.45	-35.55	74.00	285	110	Peak
2		2390.000	41.61	-4.54	37.07	-36.93	74.00	285	110	Peak
3		2402.085	103.61	-4.52	99.09	N/A	N/A	285	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 39_ANT 1	Test Voltage	AC 120V/60Hz

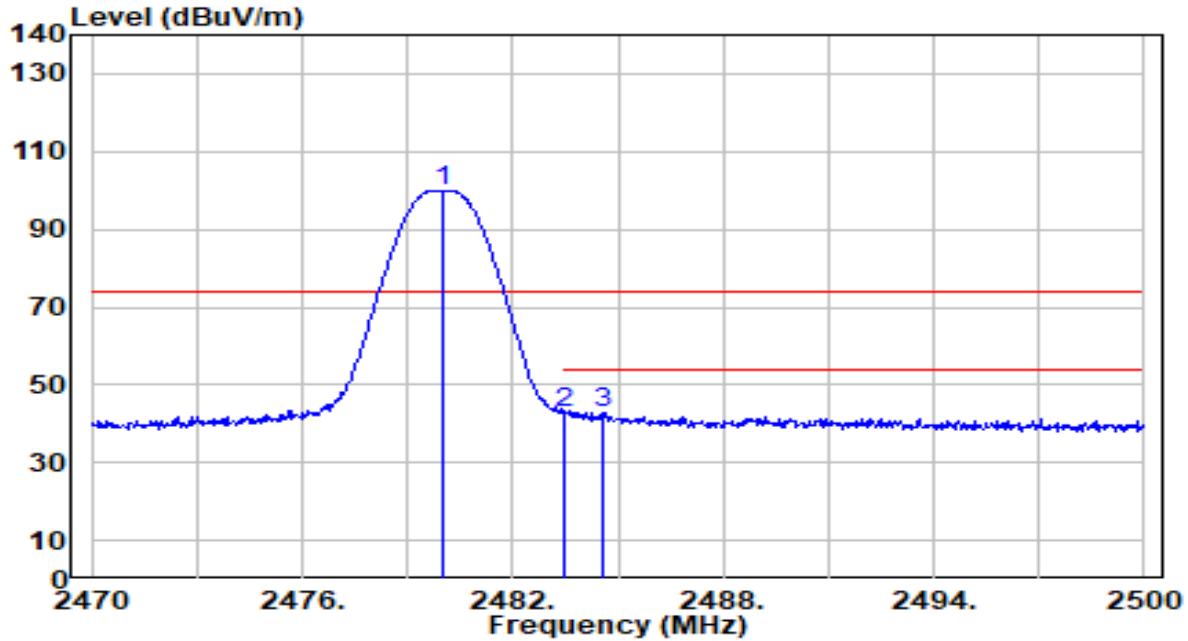


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.990	104.42	-4.32	100.10	N/A	N/A	180	201	Peak
2	2483.500	47.17	-4.31	42.86	-31.14	74.00	180	201	Peak
3	* 2484.550	47.26	-4.31	42.95	-31.05	74.00	180	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_1Mbps_CH 39_ANT 1	Test Voltage	AC 120V/60Hz

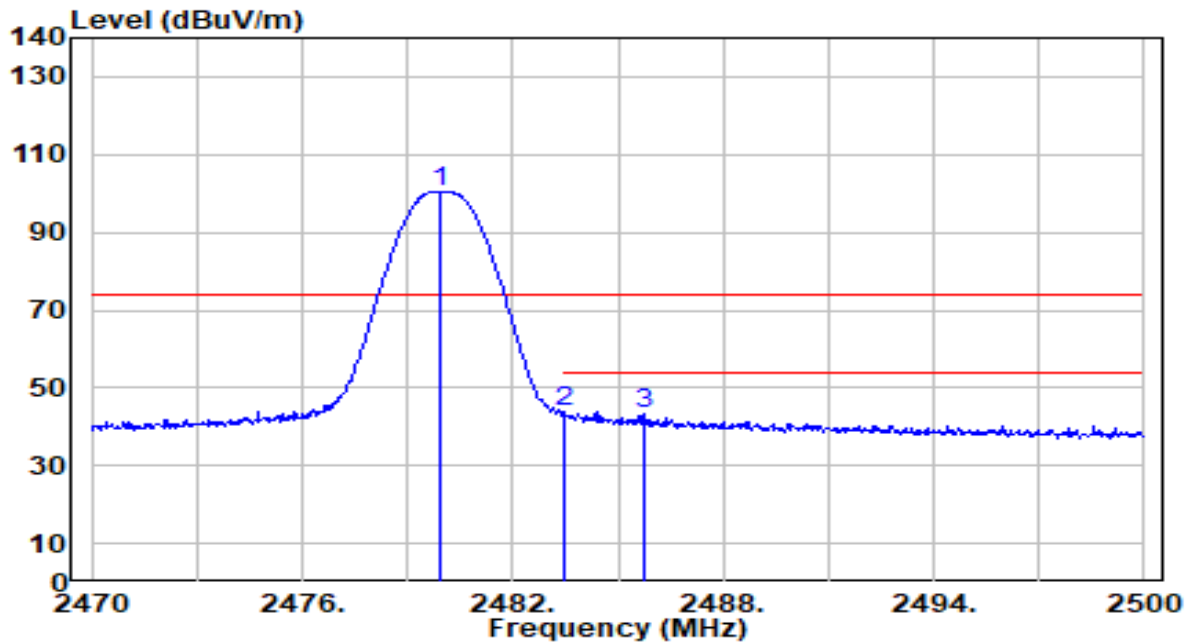


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.960	104.73	-4.32	100.41	N/A	N/A	361	88	Peak
2	* 2483.500	48.00	-4.31	43.69	-30.31	74.00	361	88	Peak
3	2485.780	47.46	-4.31	43.16	-30.84	74.00	361	88	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 0_ANT 1	Test Voltage	AC 120V/60Hz

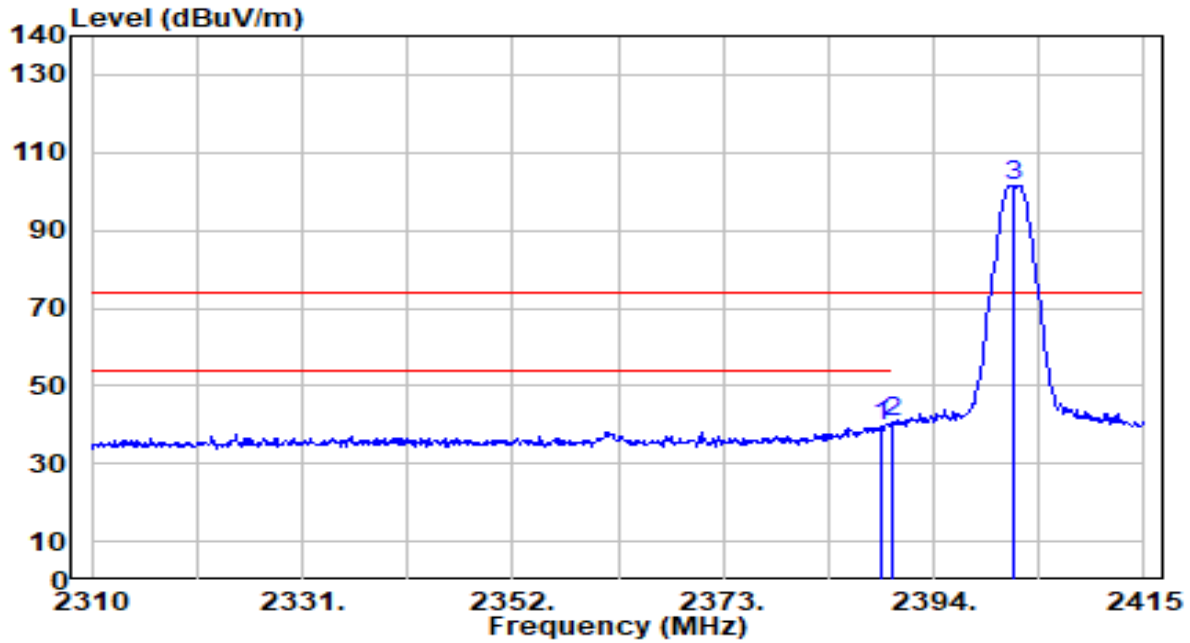


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.750	44.16	-4.54	39.62	-34.38	74.00	181	184	Peak
2	* 2390.000	45.00	-4.54	40.46	-33.54	74.00	181	184	Peak
3	2402.085	106.04	-4.52	101.52	N/A	N/A	181	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 0_ANT 1	Test Voltage	AC 120V/60Hz

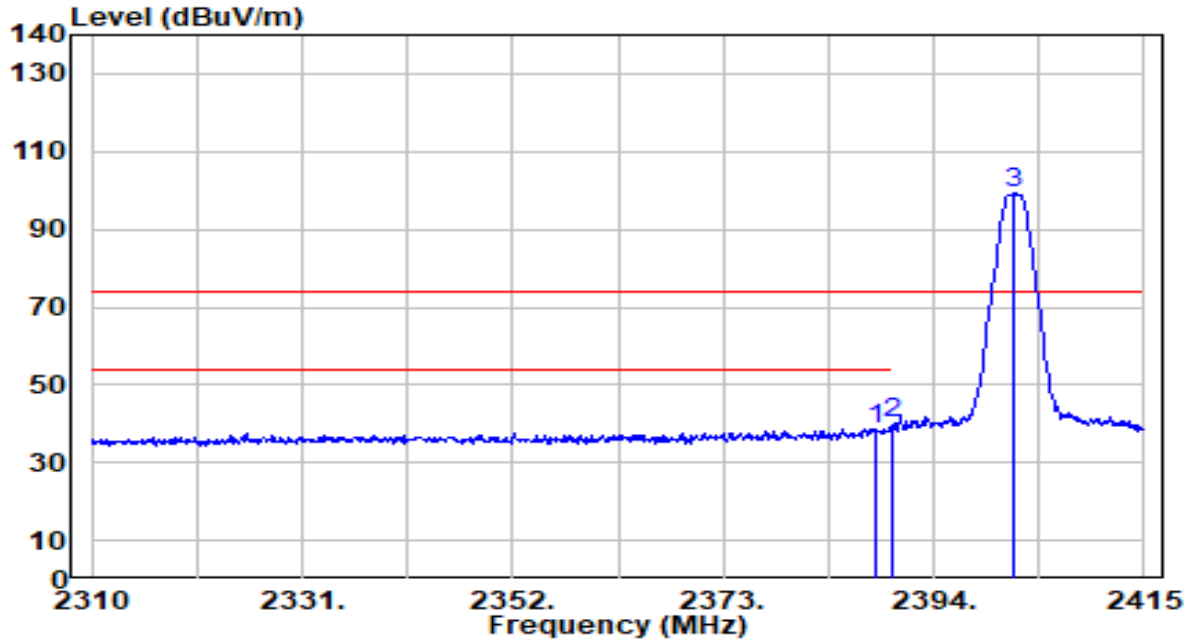


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.225	43.35	-4.54	38.80	-35.20	74.00	285	110	Peak
2	* 2390.000	44.95	-4.54	40.40	-33.60	74.00	285	110	Peak
3	2402.085	103.72	-4.52	99.20	N/A	N/A	285	110	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 39_ANT 1	Test Voltage	AC 120V/60Hz

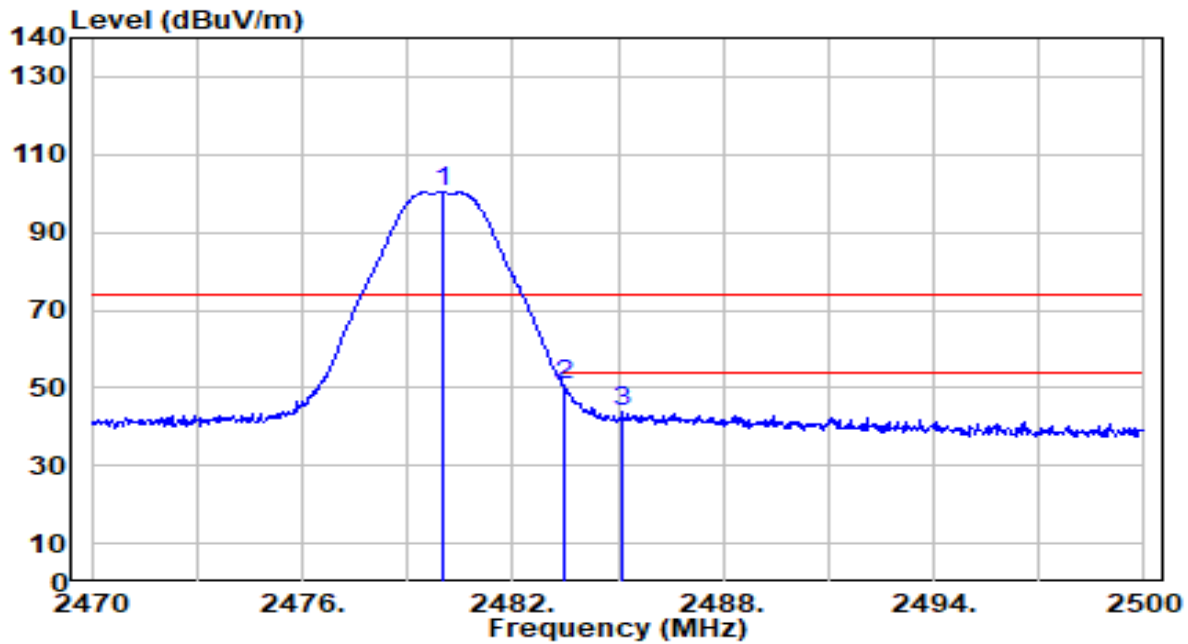


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.990	104.64	-4.32	100.32	N/A	N/A	180	201	Peak
2	* 2483.500	54.91	-4.31	50.60	-23.40	74.00	180	201	Peak
3	2485.120	48.03	-4.31	43.72	-30.28	74.00	180	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	BLE_TX_2Mbps_CH 39_ANT 1	Test Voltage	AC 120V/60Hz

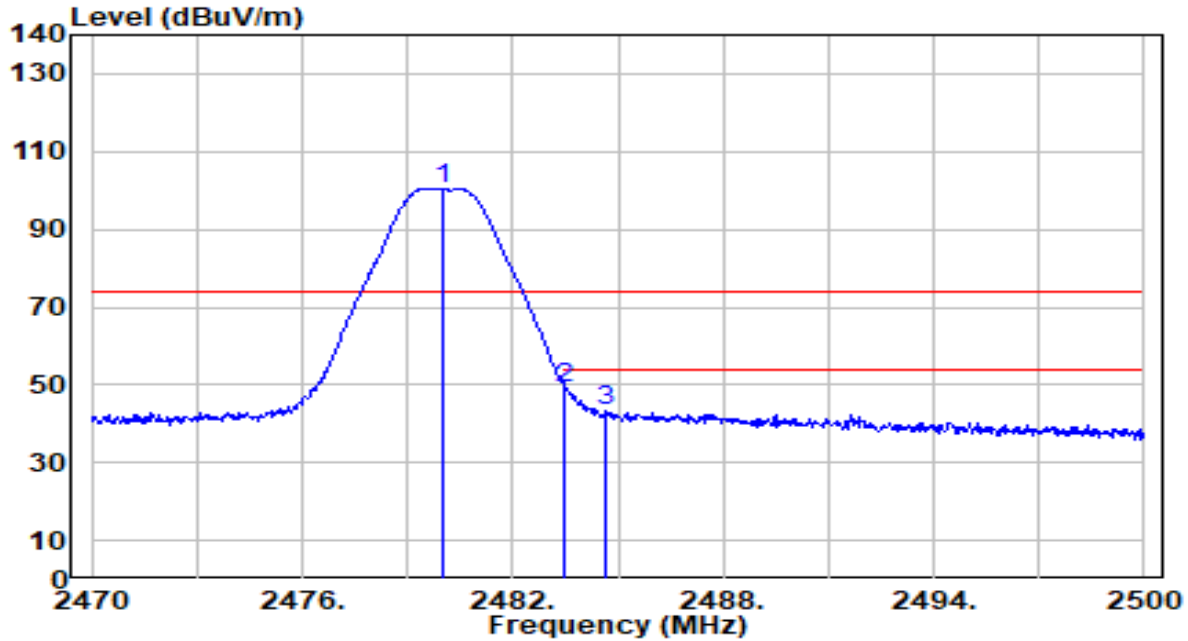

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.990	104.87	-4.32	100.55	N/A	N/A	361	88	Peak
2	* 2483.500	53.67	-4.31	49.36	-24.64	74.00	361	88	Peak
3	2484.640	47.75	-4.31	43.44	-30.56	74.00	361	88	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dBµV)	Average (dBµV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

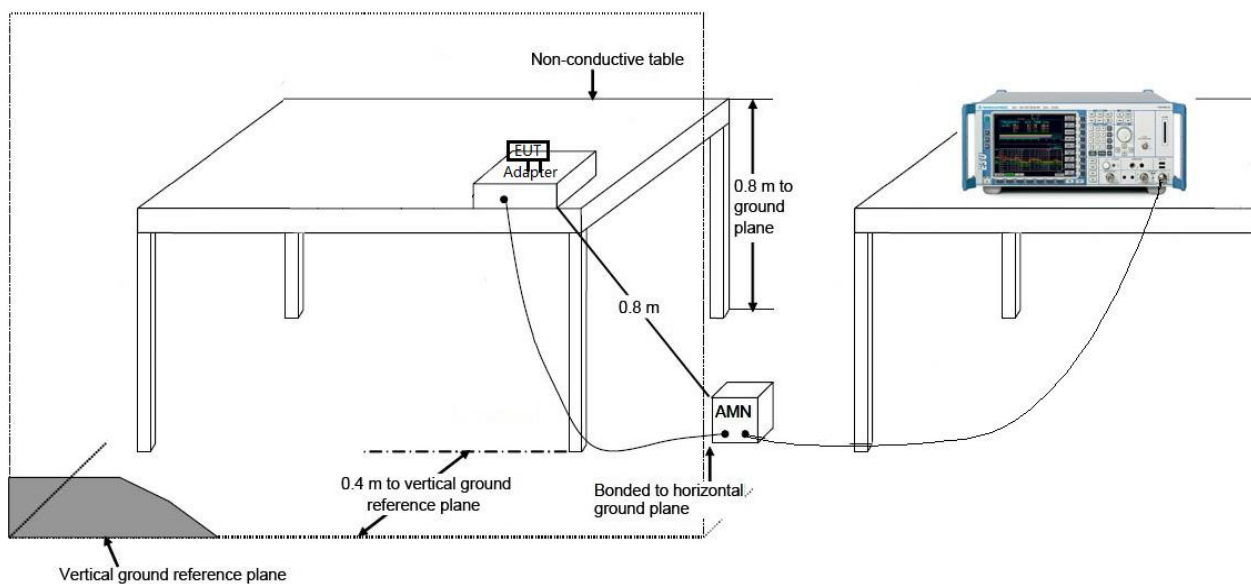

7.8.3. Test Result

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.9°C / 52%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	BLE_TX_1Mbps_CH19_Ant 0	Test Voltage	AC 120V/60Hz

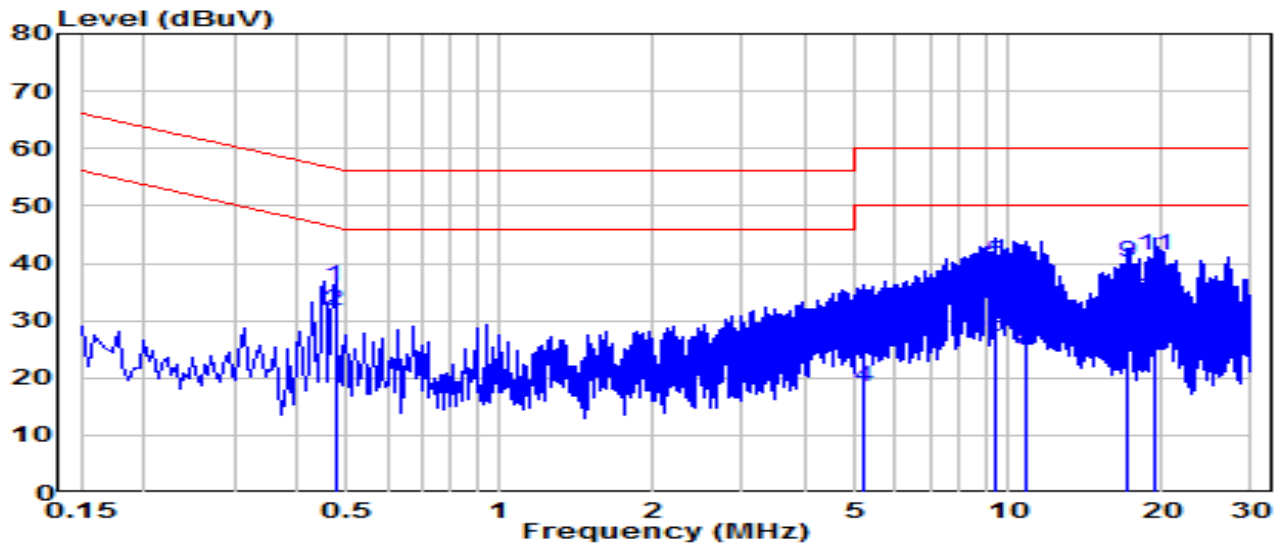


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.474	26.27	9.64	35.91	-20.54	56.44	QP
2	*	0.474	21.97	9.64	31.61	-14.83	46.44	Average
3		5.198	22.06	9.75	31.81	-28.19	60.00	QP
4		5.198	8.55	9.75	18.30	-31.70	50.00	Average
5		9.442	30.36	9.86	40.21	-19.79	60.00	QP
6		9.442	17.24	9.86	27.09	-22.91	50.00	Average
7		10.877	27.69	9.88	37.56	-22.44	60.00	QP
8		10.877	15.01	9.88	24.89	-25.11	50.00	Average
9		17.239	30.30	9.92	40.22	-19.78	60.00	QP
10		17.239	19.93	9.92	29.85	-20.15	50.00	Average
11		19.399	31.57	9.94	41.51	-18.49	60.00	QP
12		19.399	24.16	9.94	34.10	-15.90	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.9°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	BLE_TX_1Mbps_CH19_Ant 0	Test Voltage	AC 120V/60Hz

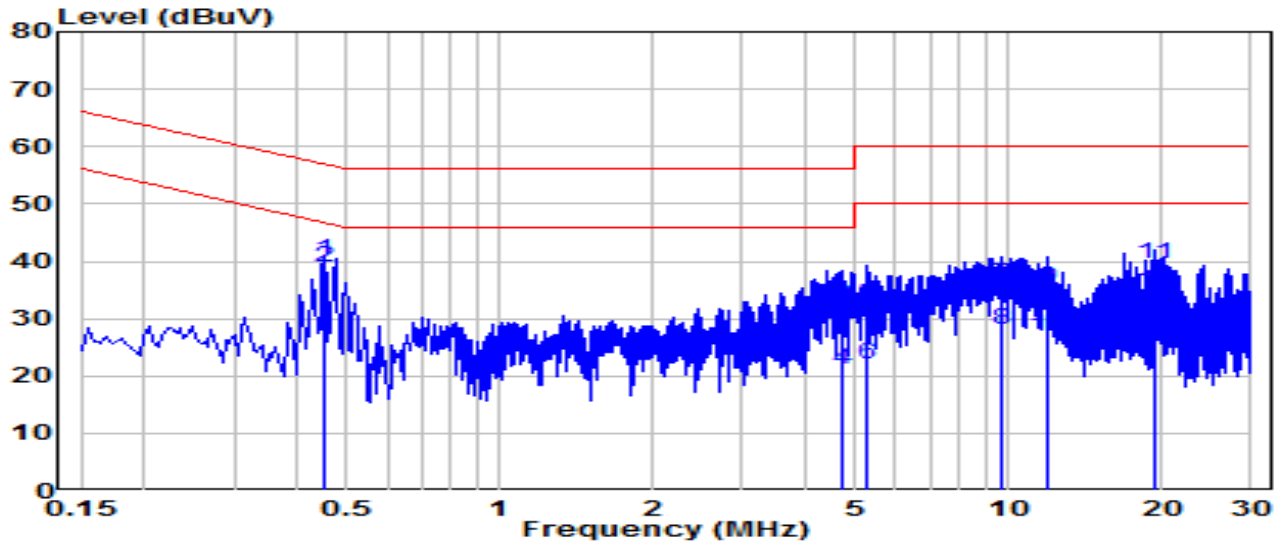

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.451	30.40	9.64	40.04	-16.81	56.85	QP
2	*	0.451	29.33	9.64	38.96	-7.88	46.85	Average
3		4.717	22.50	9.74	32.24	-23.76	56.00	QP
4		4.717	11.40	9.74	21.15	-24.85	46.00	Average
5		5.279	22.54	9.75	32.29	-27.71	60.00	QP
6		5.279	12.23	9.75	21.98	-28.02	50.00	Average
7		9.716	25.96	9.86	35.82	-24.18	60.00	QP
8		9.716	18.26	9.86	28.12	-21.88	50.00	Average
9		11.916	25.35	9.89	35.24	-24.76	60.00	QP
10		11.916	16.84	9.89	26.73	-23.27	50.00	Average
11		19.440	29.64	9.97	39.61	-20.39	60.00	QP
12		19.440	24.70	9.97	34.67	-15.33	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Video Doorbell Mini** is in compliance with Part 15C of the FCC Rules.

Appendix A : Test Photograph

Refer to “2506TW0101-UT” file.

Appendix B : External Photograph

Refer to “2506TW0101-UE” file.

Appendix C : Internal Photograph

Refer to “2506TW0101-UI” file.

————— The End —————