



Ant 1


802.11 b CH01 (2412MHz)

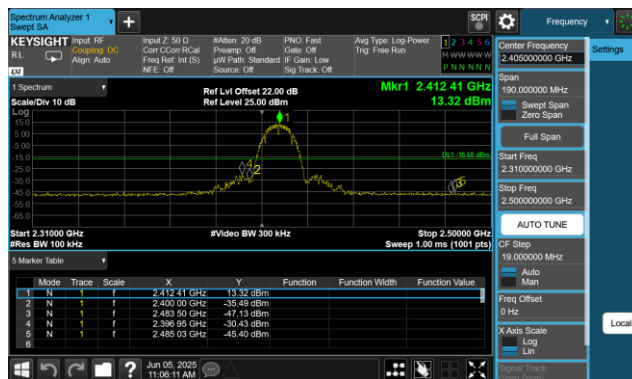


802.11 b CH01 (2412MHz)

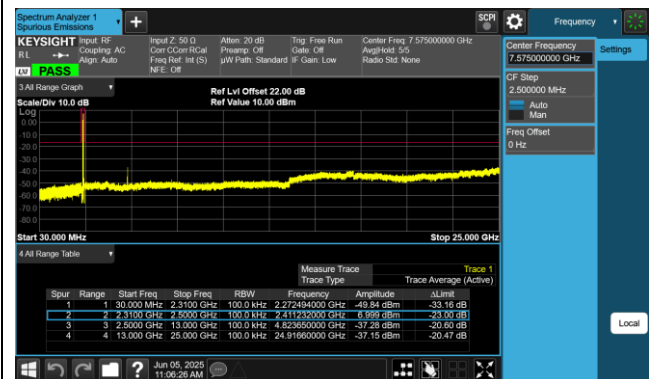


802.11 b CH06 (2437MHz)

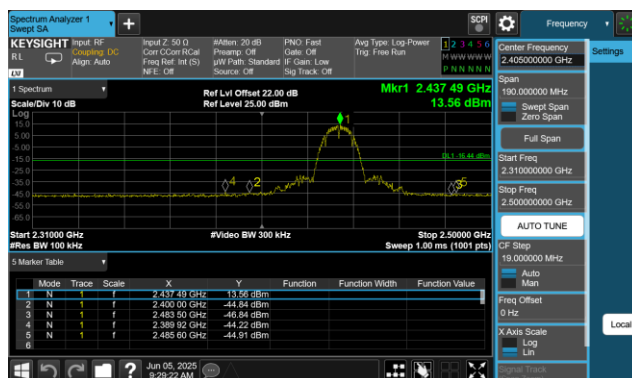


802.11 b CH06 (2437MHz)

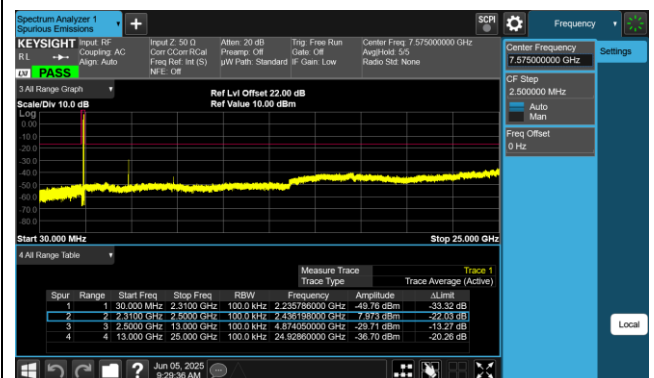


802.11 b CH11 (2462MHz)

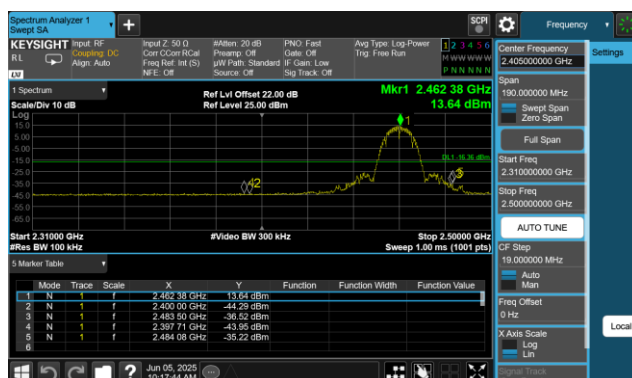


802.11 b CH11 (2462MHz)

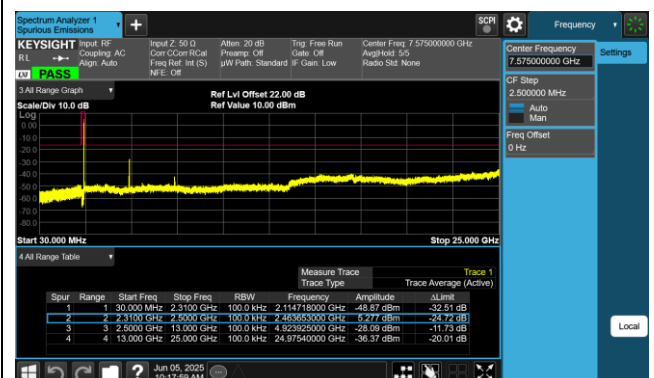


802.11 g CH01 (2412MHz)

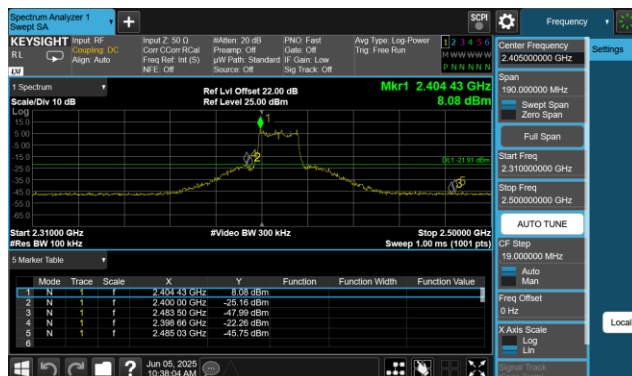


802.11 g CH01 (2412MHz)

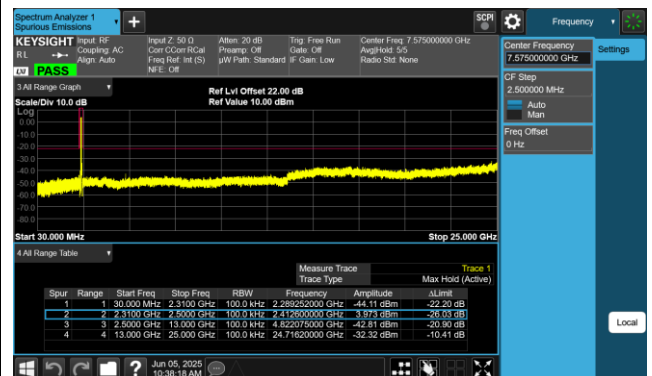


802.11 g CH06 (2437MHz)

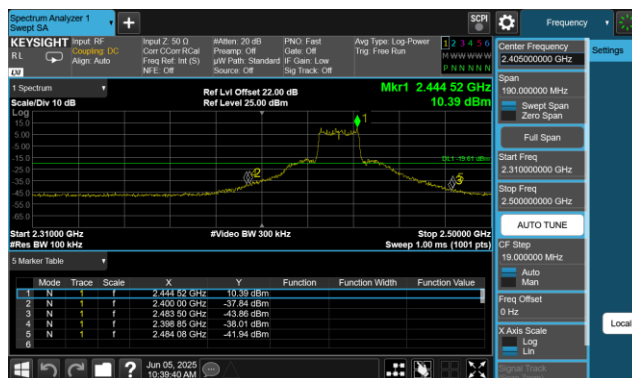


802.11 g CH06 (2437MHz)

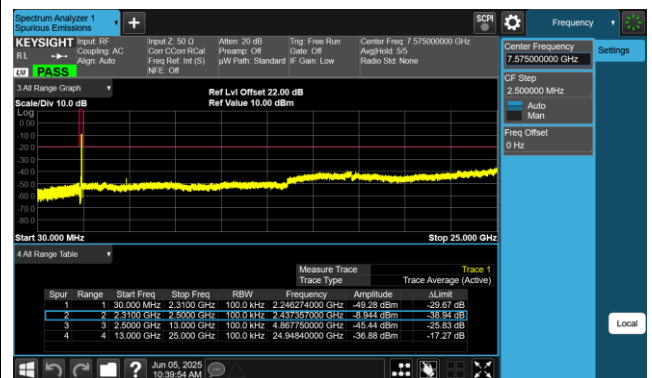

802.11 g CH11 (2462MHz)

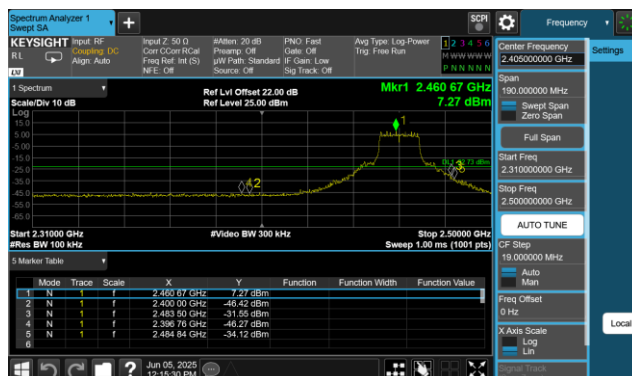


802.11 g CH11 (2462MHz)

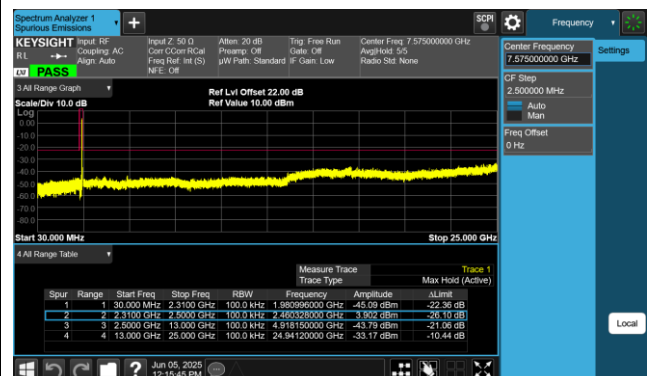

802.11 n20 CH01 (2412MHz)




802.11 n20 CH01 (2412MHz)

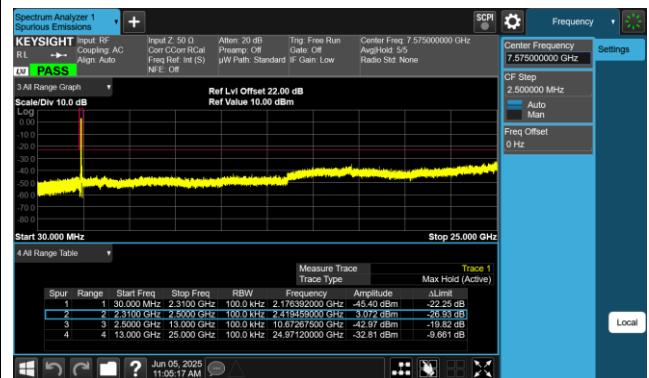


802.11 n20 CH06 (2437MHz)




802.11 n20 CH06 (2437MHz)

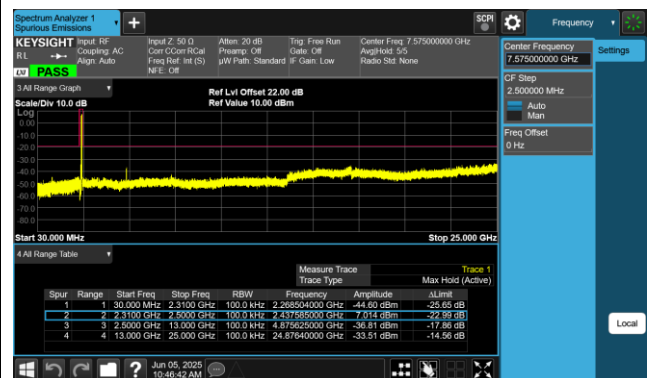

802.11 n20 CH11 (2462MHz)

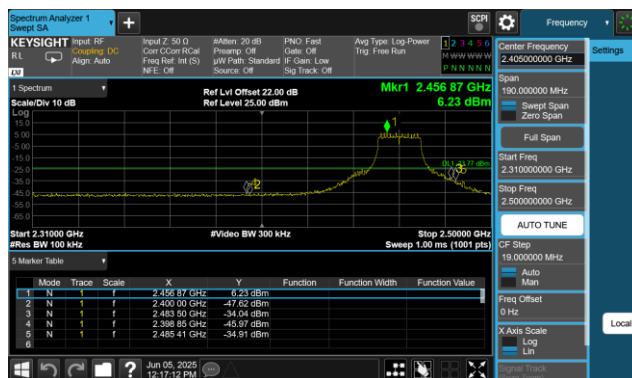

802.11 n20 CH11 (2462MHz)

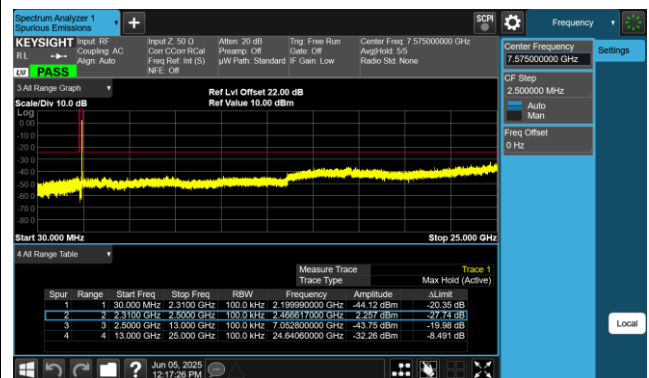

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

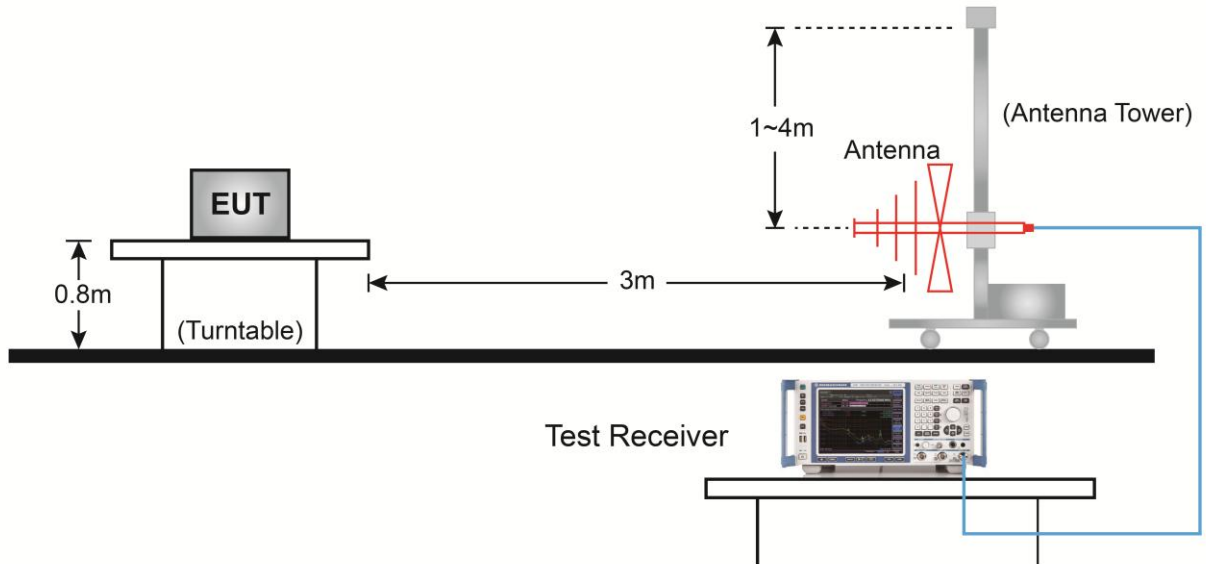


Above 1GHz Test Setup:

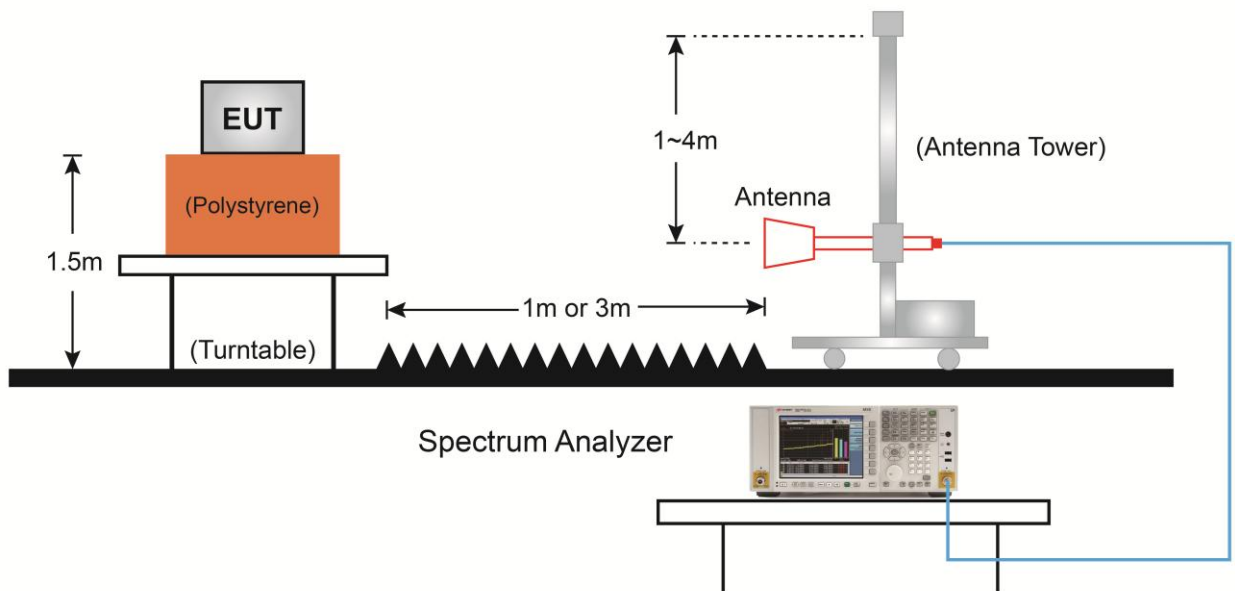

7.6.5. Test Result

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	VULB 9162	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

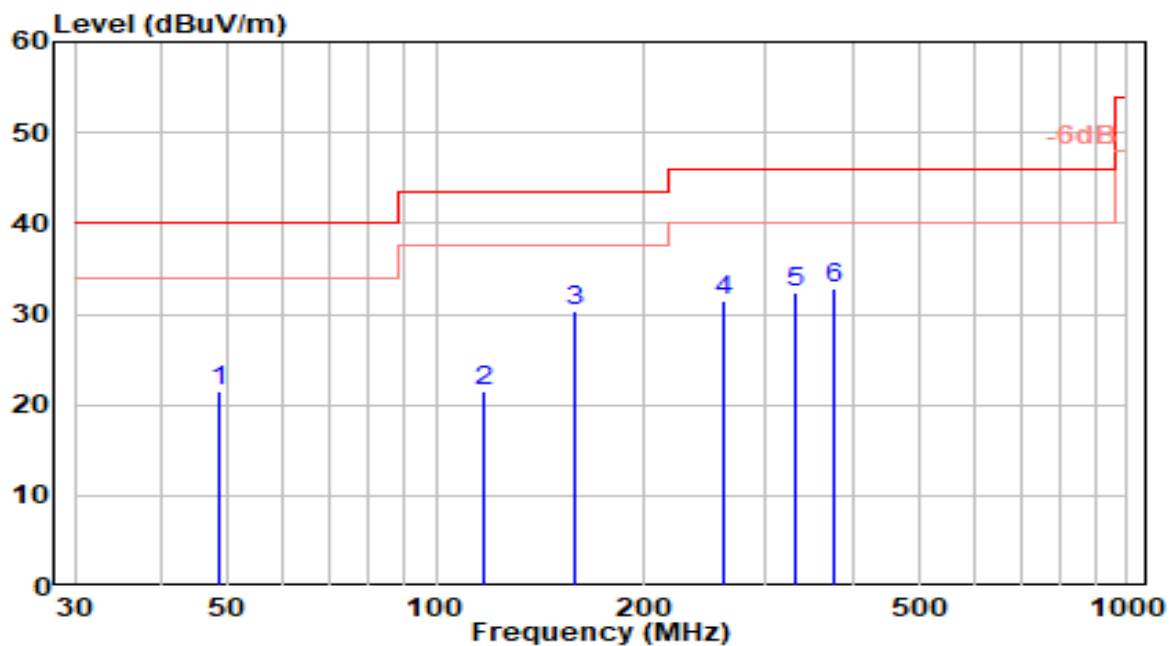


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	48.430	0.46	21.08	21.54	-18.46	40.00	100	0	QP
2	117.300	4.02	17.54	21.55	-21.95	43.50	100	296	QP
3	* 159.010	14.45	15.83	30.28	-13.22	43.50	100	0	QP
4	260.860	11.05	20.33	31.38	-14.62	46.00	100	293	QP
5	330.700	10.22	22.09	32.31	-13.69	46.00	100	95	QP
6	375.320	9.61	23.15	32.76	-13.24	46.00	100	96	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	VULB 9162	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

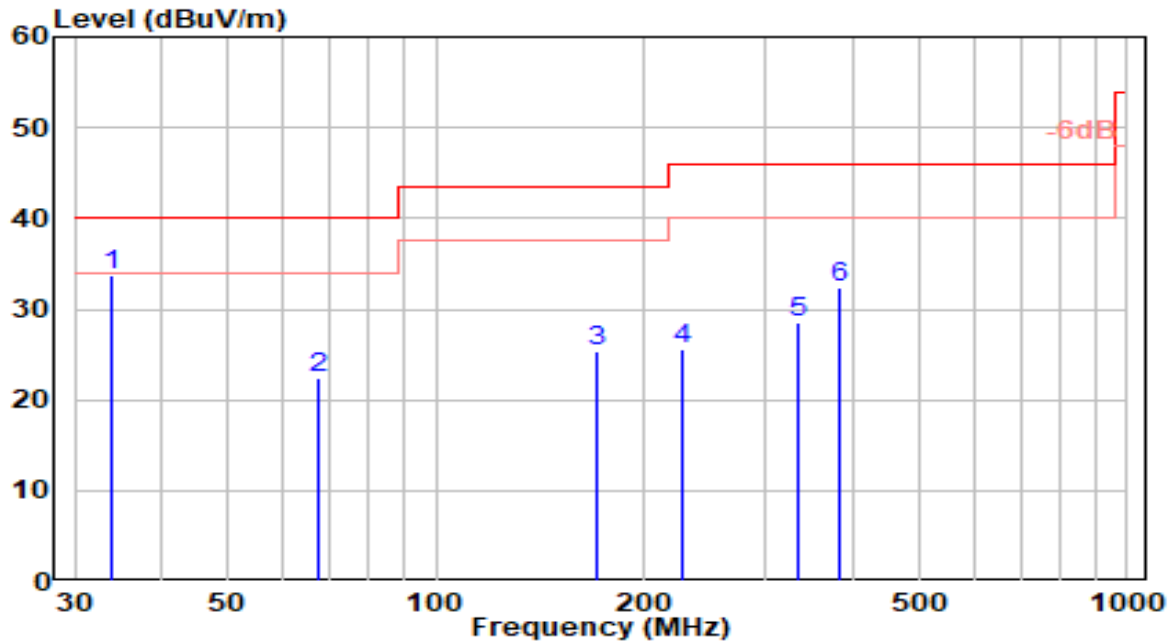


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	33.880	15.75	18.01	33.76	-6.24	40.00	100	180	QP
2		67.830	5.52	16.89	22.41	-17.59	40.00	100	78	QP
3		171.620	9.10	16.29	25.38	-18.12	43.50	100	302	QP
4		227.880	6.28	19.22	25.51	-20.49	46.00	100	275	QP
5		334.580	6.25	22.22	28.47	-17.53	46.00	100	0	QP
6		383.080	9.10	23.26	32.37	-13.63	46.00	100	332	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	VULB 9162	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

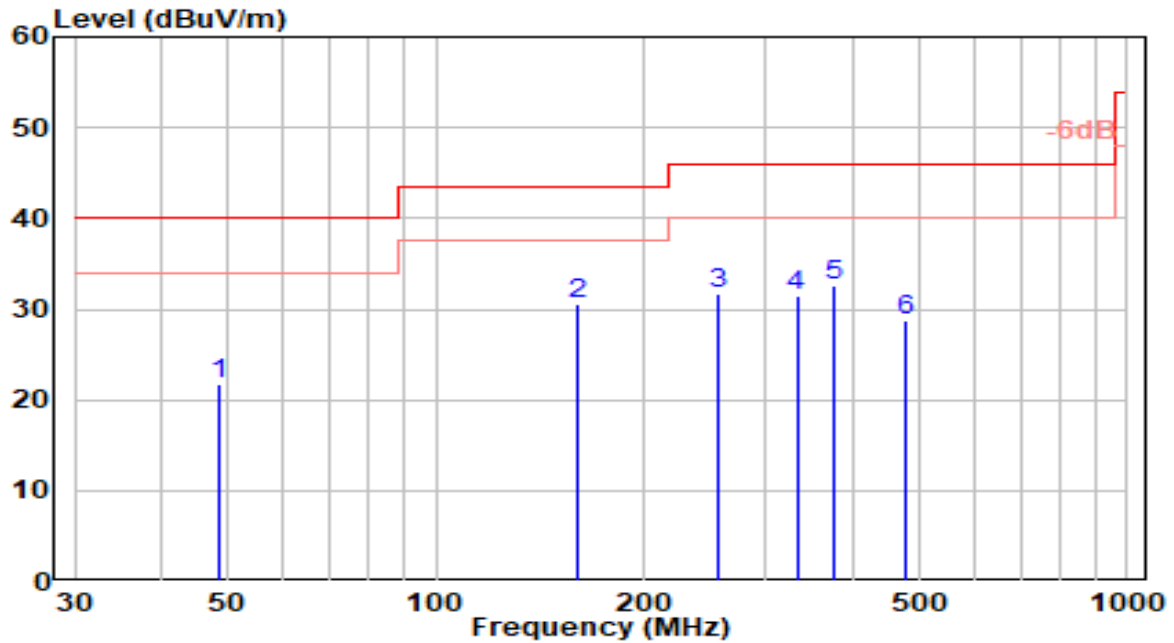


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		48.430	0.72	21.08	21.80	-18.20	40.00	100	290	QP
2	*	159.980	14.71	15.87	30.58	-12.92	43.50	100	256	QP
3		256.980	11.41	20.29	31.70	-14.30	46.00	100	300	QP
4		332.640	9.34	22.16	31.50	-14.50	46.00	100	74	QP
5		377.260	9.51	23.18	32.69	-13.31	46.00	100	91	QP
6		479.110	3.94	24.71	28.65	-17.35	46.00	100	81	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	VULB 9162	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

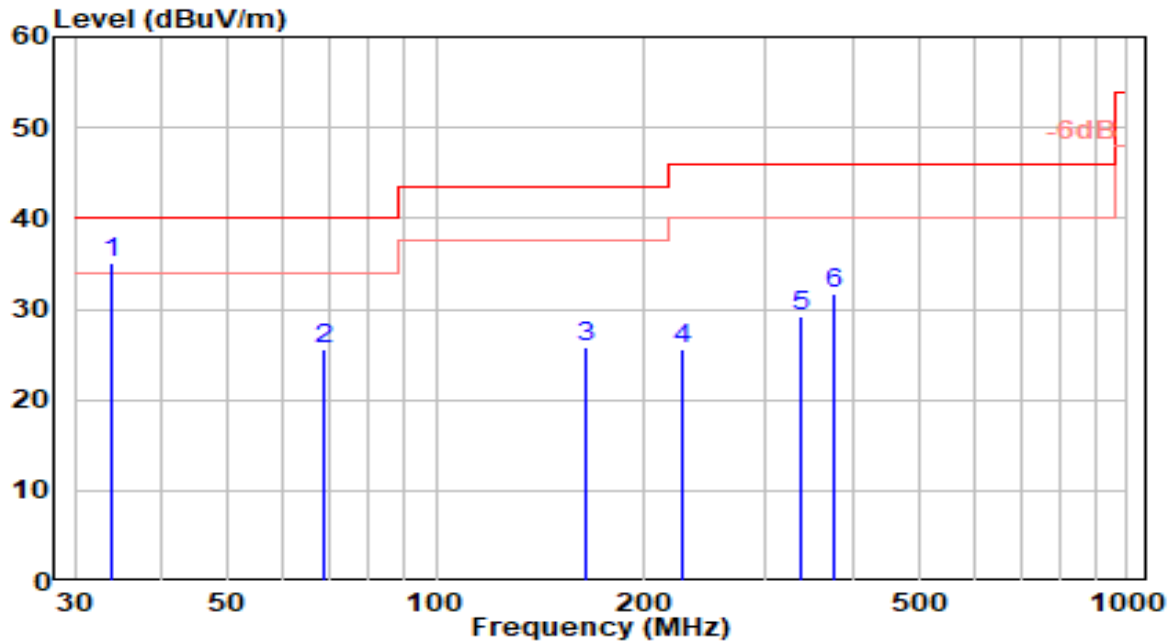


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	33.880	17.10	18.01	35.10	-4.90	40.00	100	129	QP
2		68.800	9.14	16.54	25.68	-14.32	40.00	100	28	QP
3		164.830	9.82	16.04	25.85	-17.65	43.50	100	234	QP
4		227.880	6.36	19.22	25.59	-20.41	46.00	100	308	QP
5		338.460	6.77	22.36	29.13	-16.87	46.00	100	348	QP
6		377.260	8.44	23.18	31.62	-14.38	46.00	100	336	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

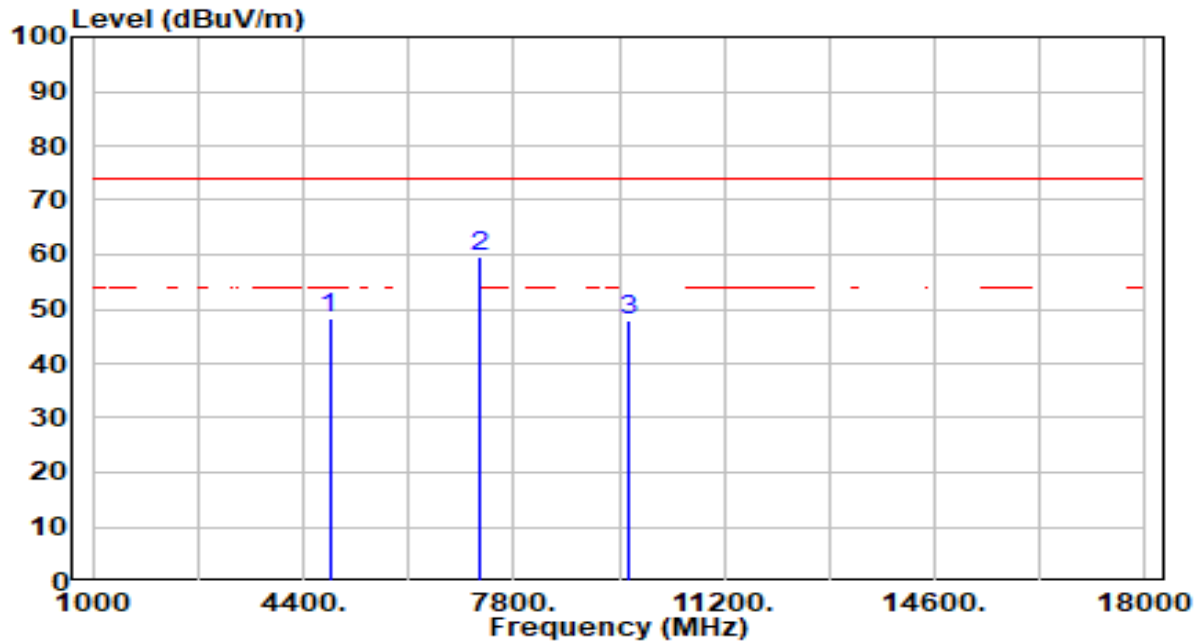


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	46.84	1.37	48.21	-25.79	74.00	218	353	Peak
2	*	7236.000	51.86	7.76	59.62	-14.38	74.00	100	266	Peak
3		9648.000	40.92	7.05	47.97	-26.03	74.00	100	93	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

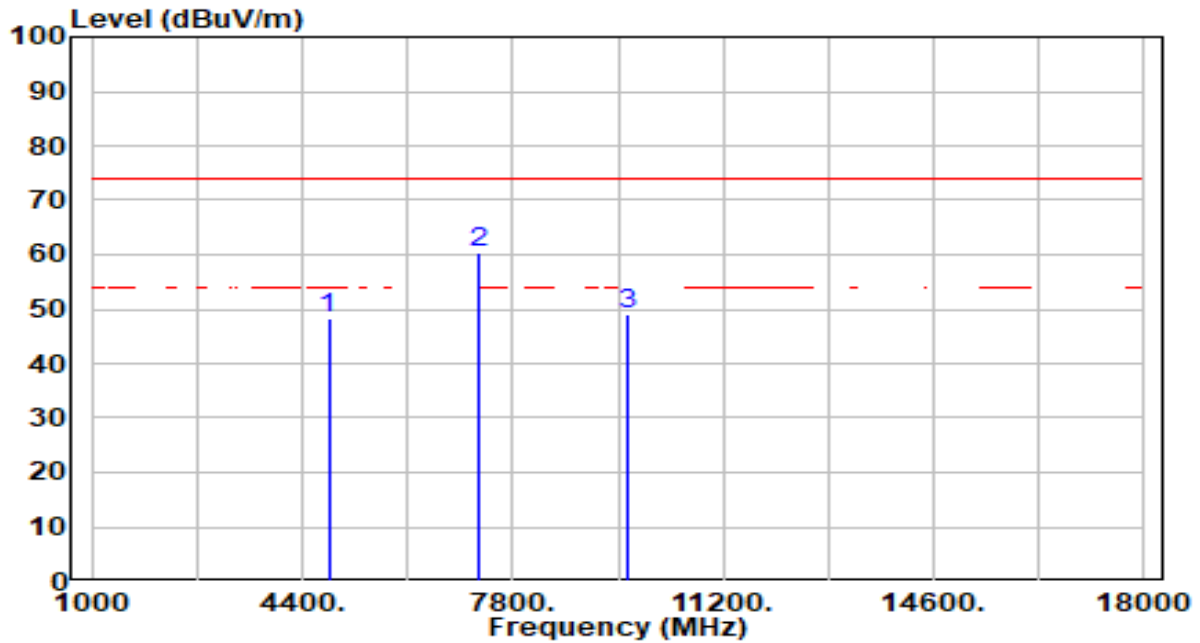


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	46.78	1.37	48.15	-25.85	74.00	200	91	Peak
2	* 7236.000	52.48	7.76	60.24	-13.76	74.00	100	163	Peak
3	9648.000	42.09	7.05	49.15	-24.85	74.00	200	198	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

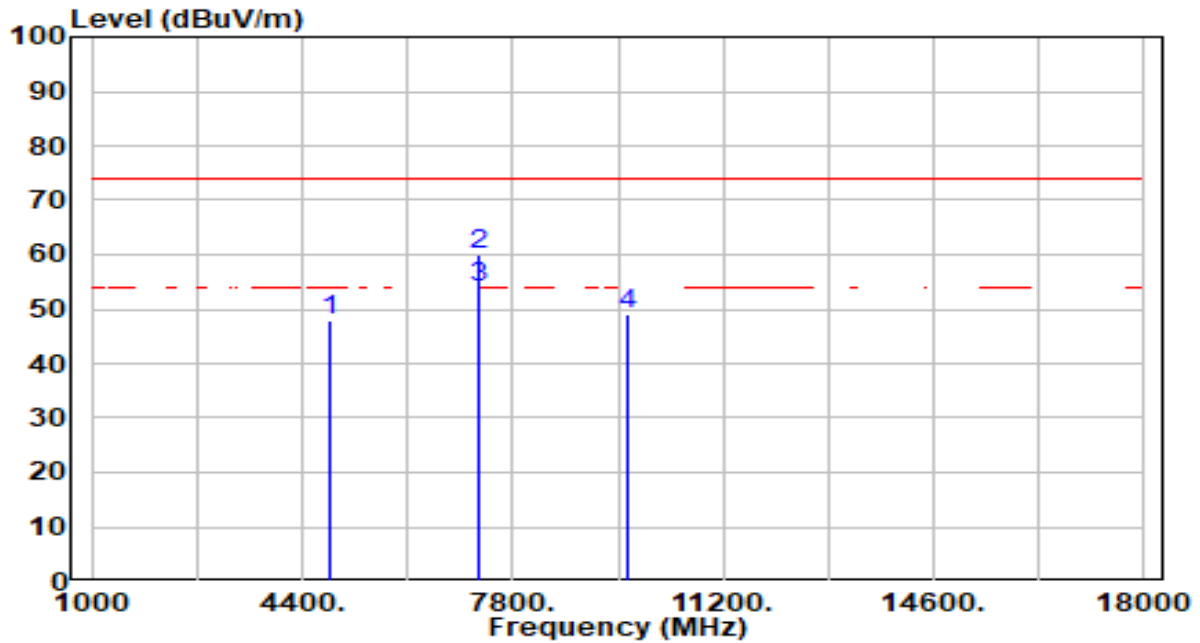


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4834.000	46.62	1.39	48.01	-25.99	74.00	100	346	Peak
2	*	7251.000	52.29	7.81	60.10	-13.90	74.00	100	288	Peak
3	*	7251.000	46.03	7.81	53.84	-0.16	54.00	100	288	Average
4		9668.000	41.98	7.05	49.03	-24.97	74.00	300	279	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

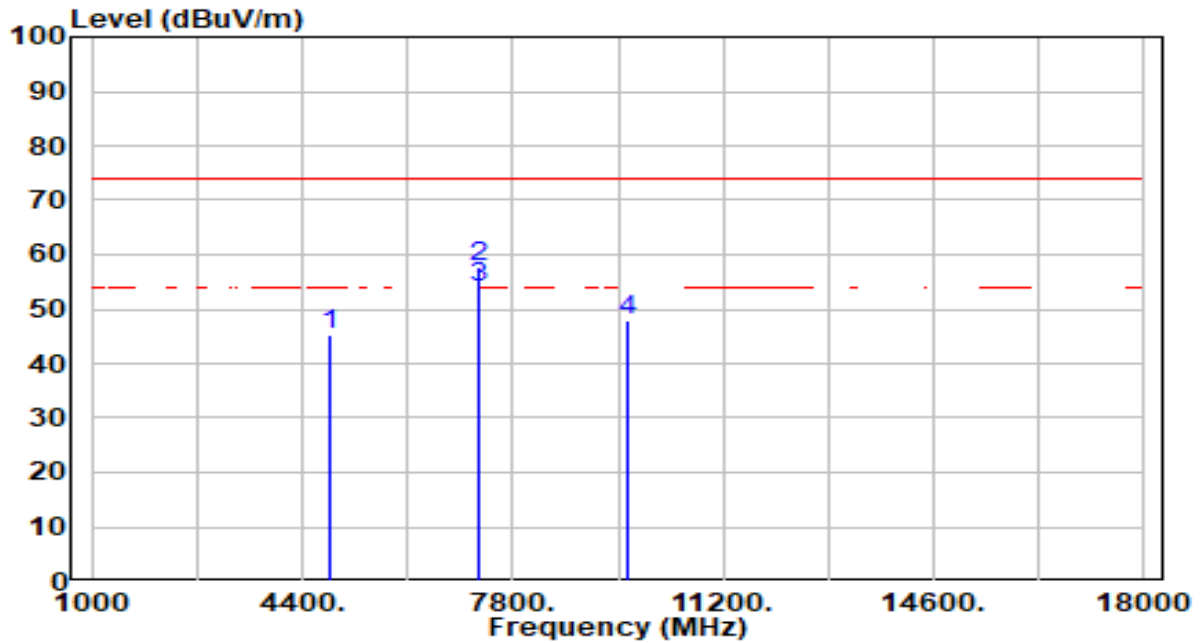


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4834.000	43.74	1.39	45.13	-28.87	74.00	200	110	Peak
2	*	7251.000	49.86	7.81	57.67	-16.33	74.00	100	13	Peak
3	*	7251.000	46.06	7.81	53.87	-0.13	54.00	100	13	Average
4		9668.000	41.05	7.05	48.10	-25.90	74.00	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 3_Ant 0	Test Voltage	AC 120V/60Hz

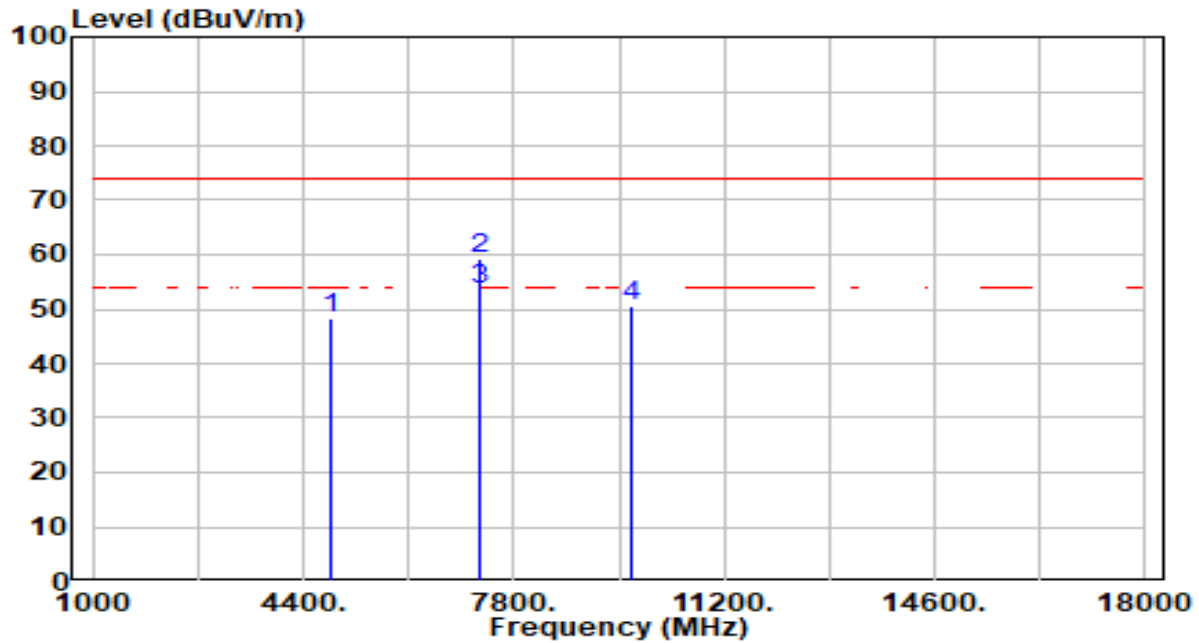


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4844.000	46.74	1.41	48.15	-25.85	74.00	105	337	Peak
2	*	7266.000	51.45	7.86	59.31	-14.69	74.00	100	292	Peak
3	*	7266.000	45.65	7.86	53.51	-0.49	54.00	100	292	Average
4		9688.000	43.42	7.04	50.46	-23.54	74.00	300	109	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 3_Ant 0	Test Voltage	AC 120V/60Hz

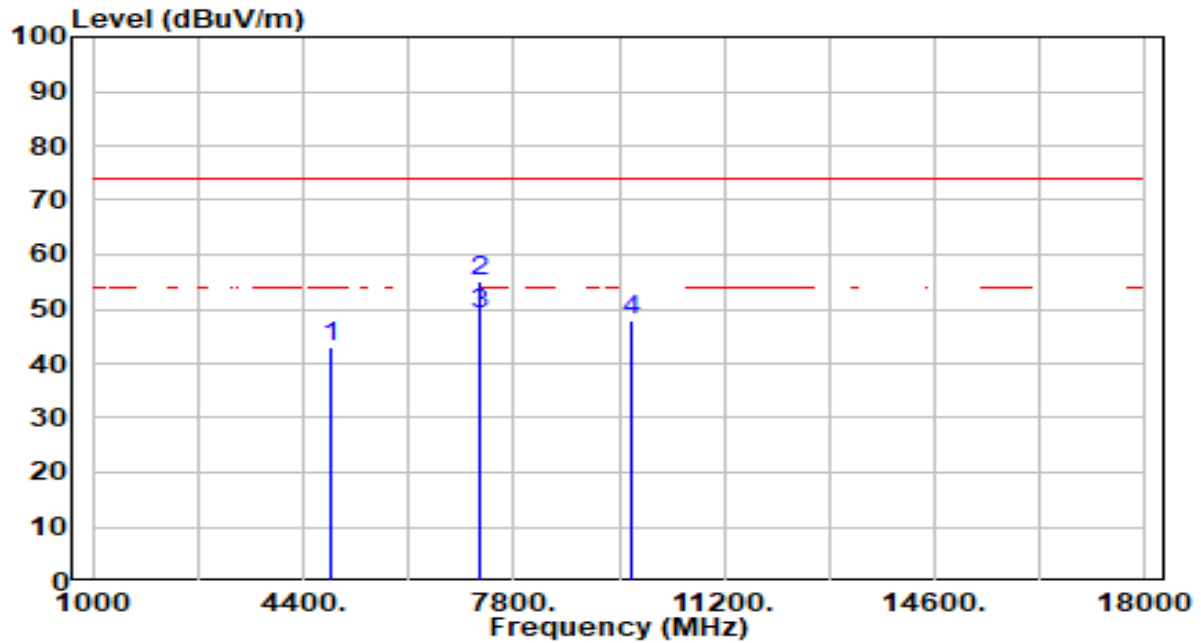


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4844.000	41.46	1.41	42.87	-31.13	74.00	100	94	Peak
2	*	7266.000	47.18	7.86	55.04	-18.96	74.00	300	280	Peak
3	*	7266.000	41.04	7.86	48.90	-5.10	54.00	300	280	Average
4		9688.000	40.77	7.04	47.81	-26.19	74.00	100	240	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 4_Ant 0	Test Voltage	AC 120V/60Hz

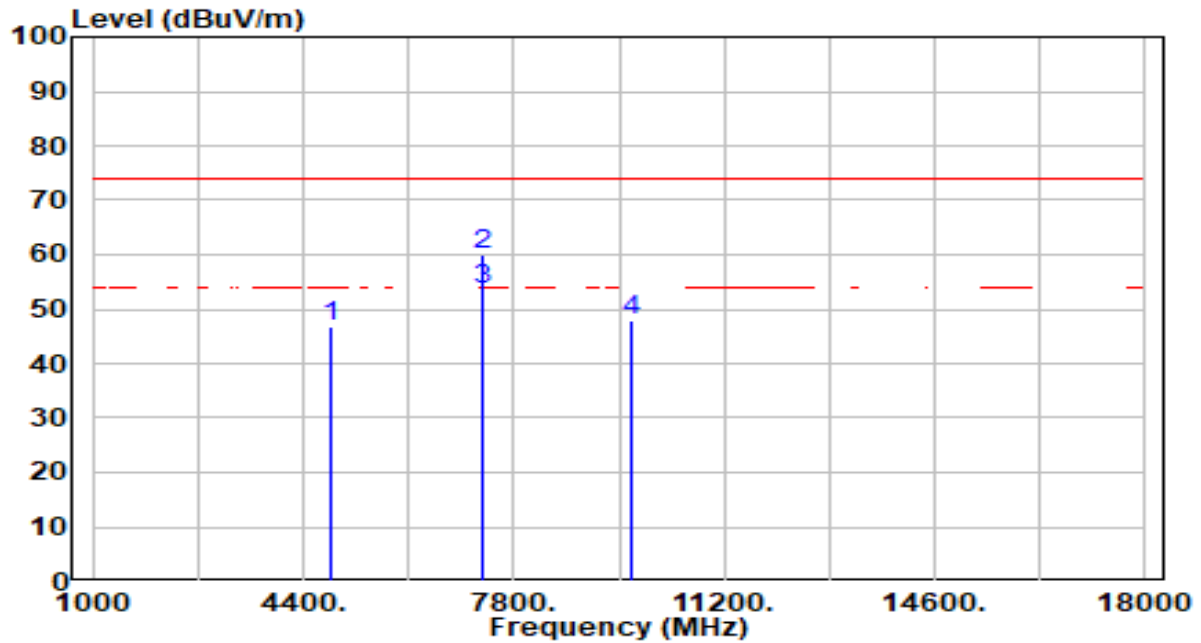


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4854.000	45.33	1.43	46.76	-27.24	74.00	100	330	Peak
2	*	7281.000	51.90	7.91	59.81	-14.19	74.00	100	283	Peak
3	*	7281.000	45.53	7.91	53.44	-0.56	54.00	100	283	Average
4		9708.000	41.04	7.05	48.08	-25.92	74.00	300	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 4_Ant 0	Test Voltage	AC 120V/60Hz

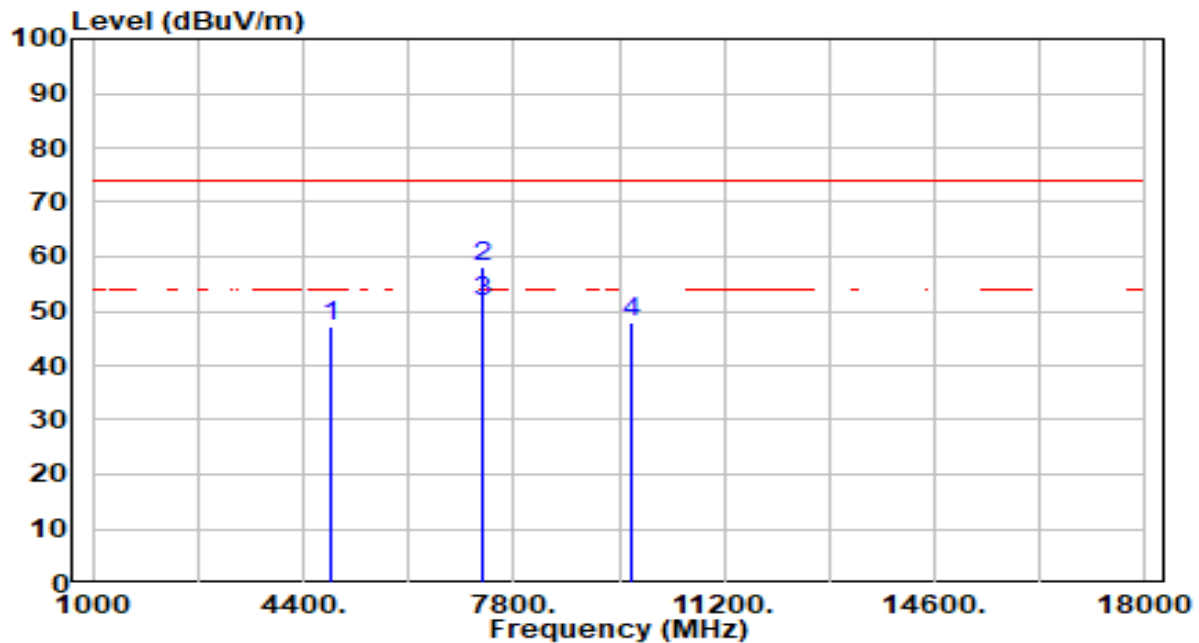


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4854.000	45.60	1.43	47.03	-26.97	74.00	200	128	Peak
2	*	7281.000	50.06	7.91	57.98	-16.02	74.00	100	7	Peak
3	*	7281.000	43.76	7.91	51.67	-2.33	54.00	100	7	Average
4		9708.000	40.69	7.05	47.74	-26.26	74.00	300	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 5_Ant 0	Test Voltage	AC 120V/60Hz

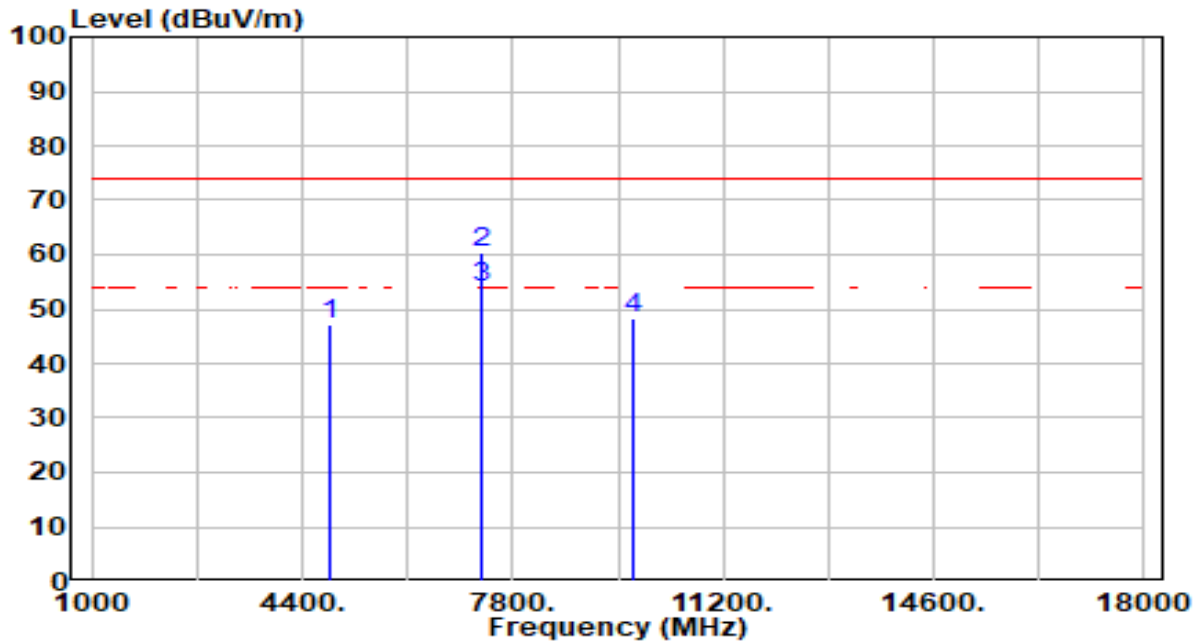


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4864.000	45.88	1.45	47.33	-26.67	74.00	154	336	Peak
2	*	7296.000	52.38	7.96	60.35	-13.65	74.00	121	296	Peak
3	*	7296.000	45.86	7.96	53.82	-0.18	54.00	121	296	Average
4		9728.000	41.09	7.07	48.16	-25.84	74.00	300	121	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 5_Ant 0	Test Voltage	AC 120V/60Hz

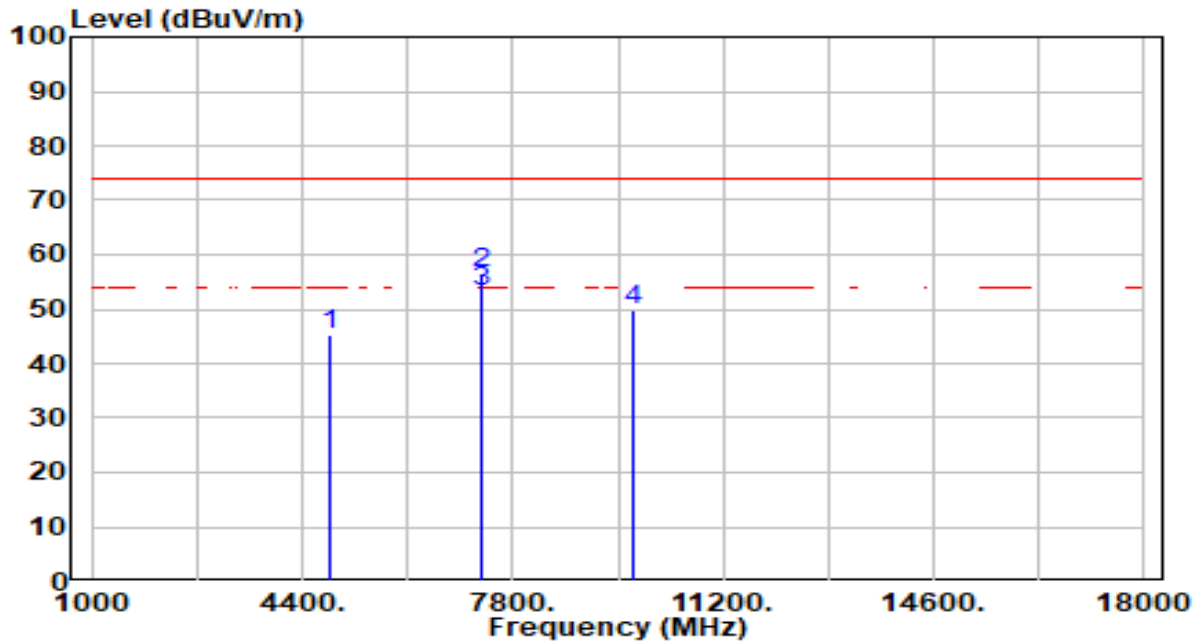


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4864.000	43.90	1.45	45.36	-28.64	74.00	300	70	Peak
2	*	7296.000	48.81	7.96	56.78	-17.22	74.00	300	303	Peak
3	*	7296.000	45.17	7.96	53.13	-0.87	54.00	300	303	Average
4		9728.000	42.79	7.07	49.86	-24.14	74.00	300	21	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

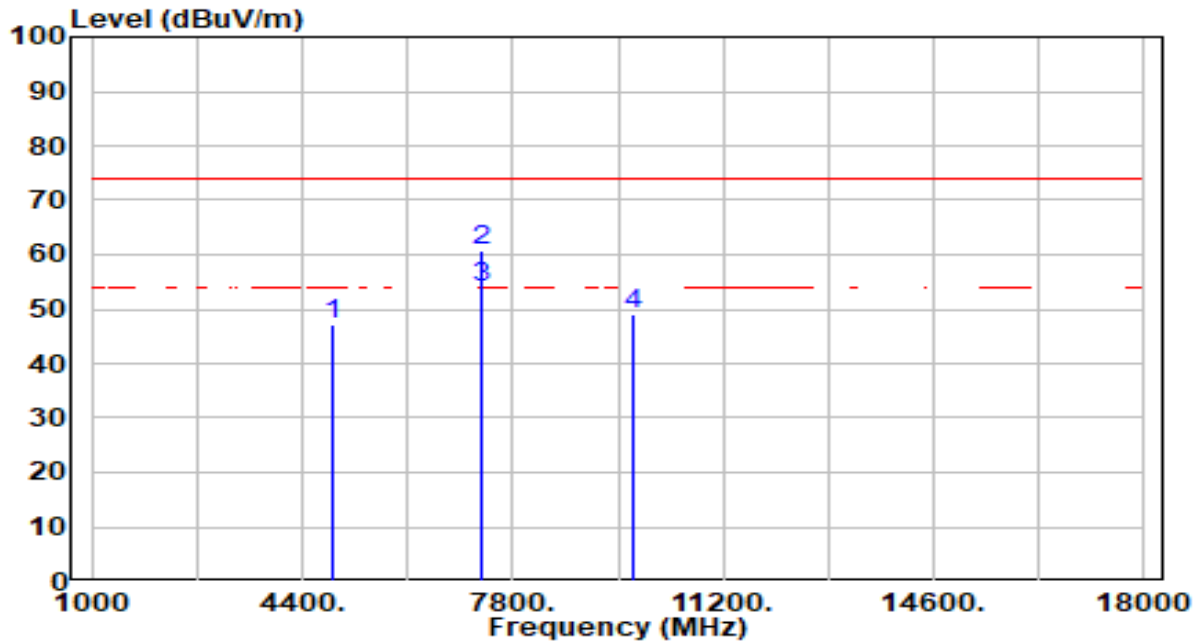


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	45.52	1.48	47.00	-27.00	74.00	200	339	Peak
2	*	7311.000	52.89	8.01	60.90	-13.10	74.00	100	251	Peak
3	*	7311.000	45.81	8.01	53.82	-0.18	54.00	100	251	Average
4		9748.000	41.85	7.09	48.95	-25.05	74.00	100	304	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

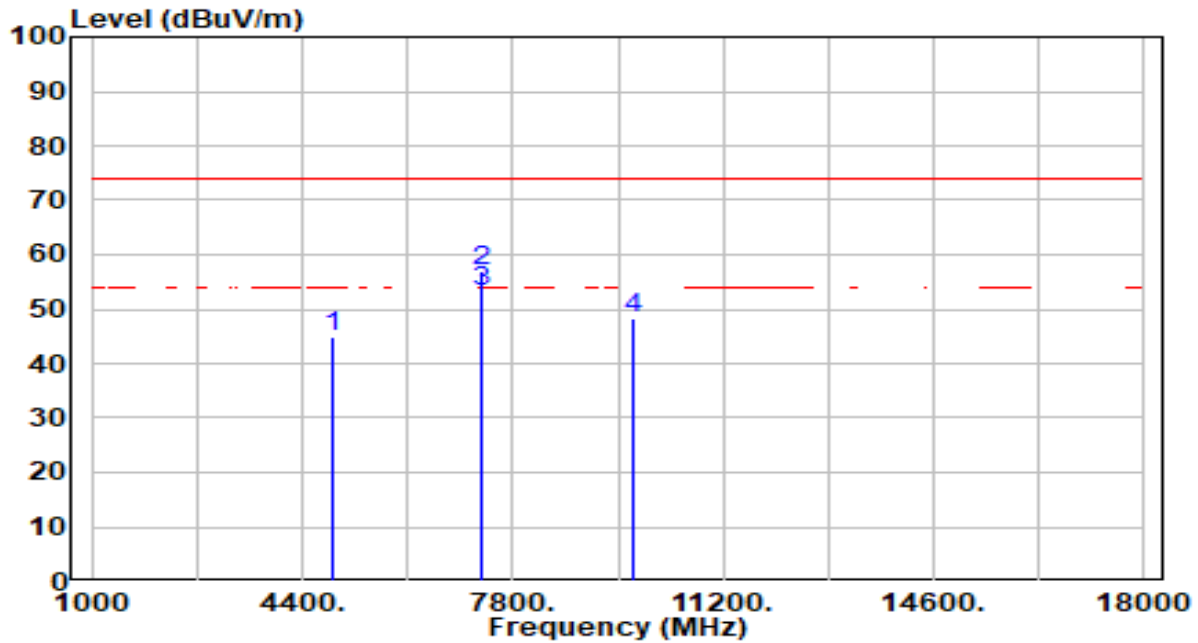


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	43.41	1.48	44.89	-29.11	74.00	219	300	Peak
2	*	7311.000	48.84	8.01	56.85	-17.15	74.00	100	167	Peak
3	*	7311.000	45.37	8.01	53.38	-0.62	54.00	100	167	Average
4		9748.000	41.35	7.09	48.45	-25.55	74.00	300	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

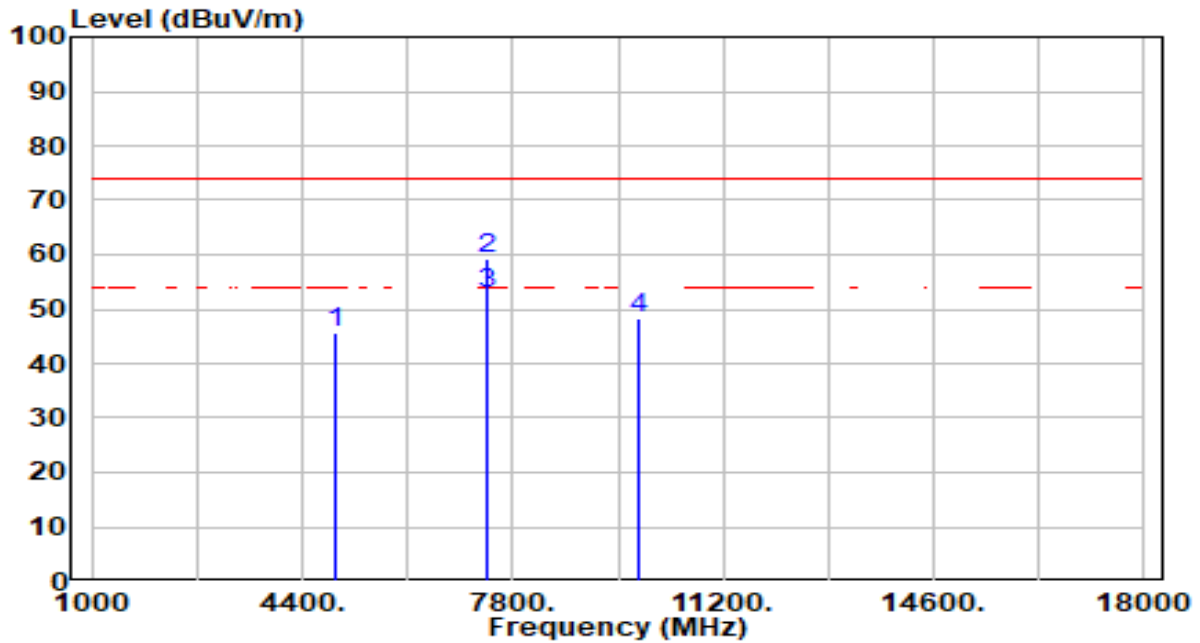


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	44.14	1.62	45.76	-28.24	74.00	300	339	Peak
2	*	7386.000	51.10	8.23	59.32	-14.68	74.00	100	255	Peak
3	*	7386.000	44.58	8.23	52.81	-1.19	54.00	100	255	Average
4		9848.000	41.03	7.18	48.20	-25.80	74.00	300	358	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

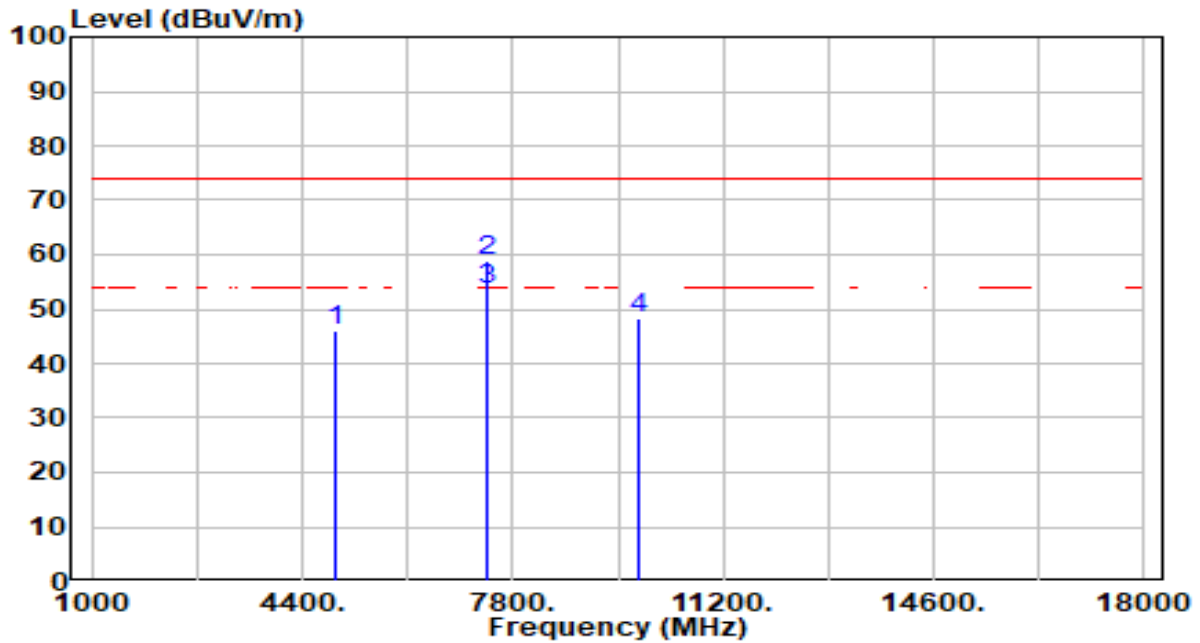


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	44.26	1.62	45.88	-28.12	74.00	230	317	Peak
2	*	7386.000	50.70	8.23	58.93	-15.07	74.00	100	178	Peak
3	*	7386.000	45.47	8.23	53.70	-0.30	54.00	100	178	Average
4		9848.000	40.99	7.18	48.17	-25.83	74.00	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

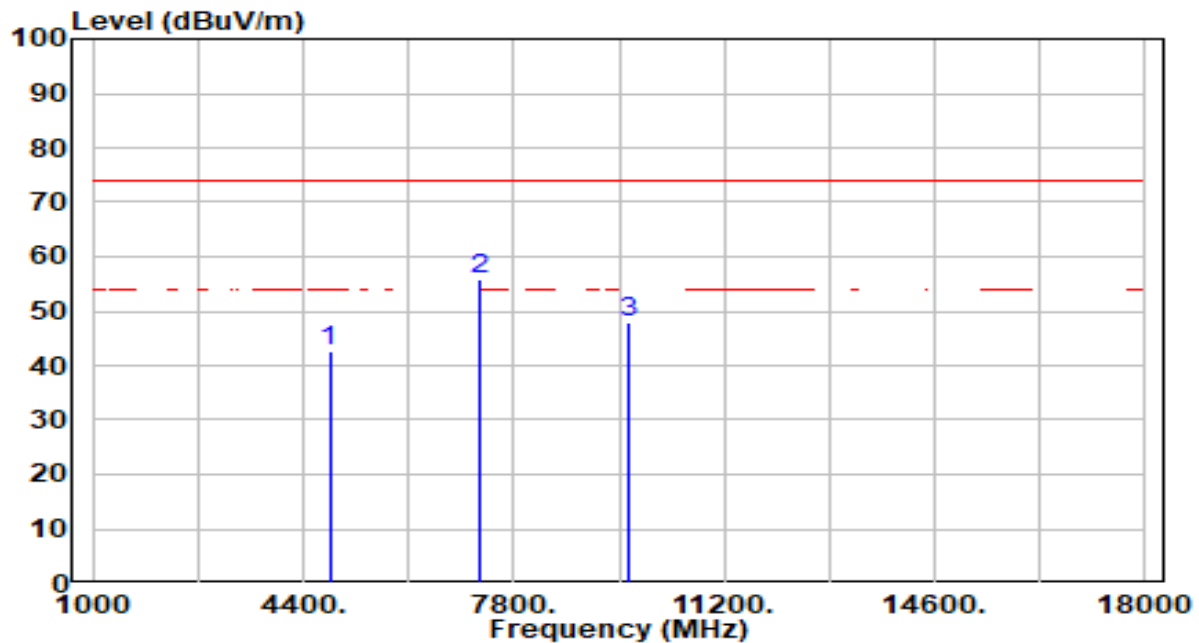


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.23	1.37	42.60	-31.40	74.00	200	288	Peak
2	* 7236.000	48.13	7.76	55.89	-18.11	74.00	100	271	Peak
3	9648.000	40.75	7.05	47.80	-26.20	74.00	200	323	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

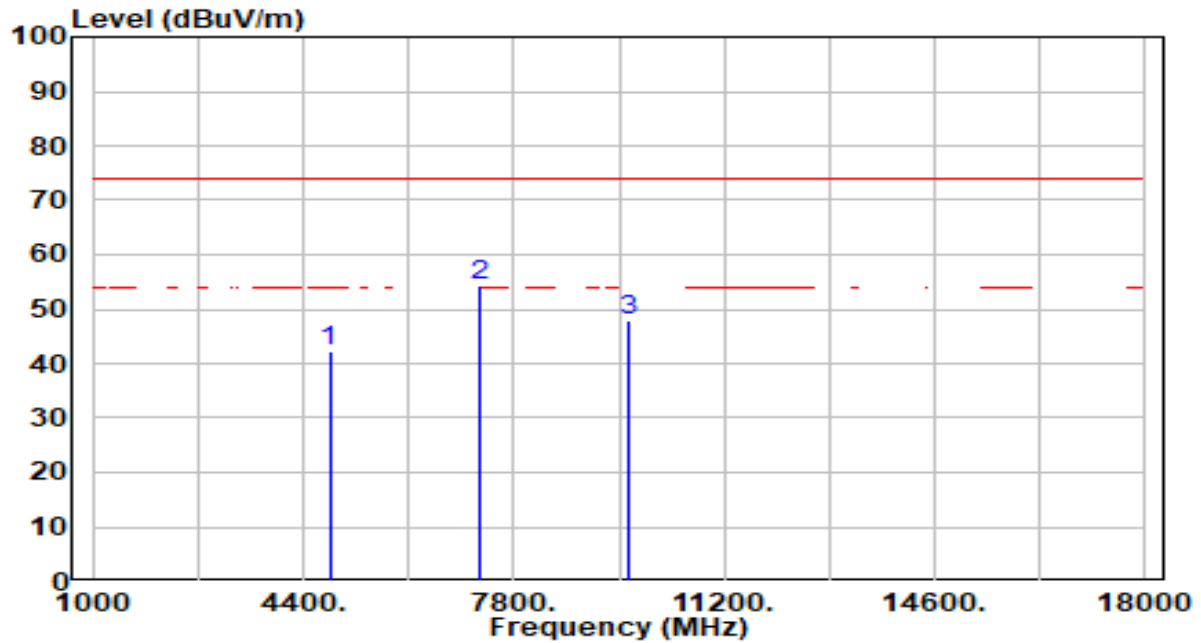


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.06	1.37	42.42	-31.58	74.00	296	35	Peak
2	* 7236.000	46.52	7.76	54.28	-19.72	74.00	100	166	Peak
3	9648.000	40.69	7.05	47.75	-26.25	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

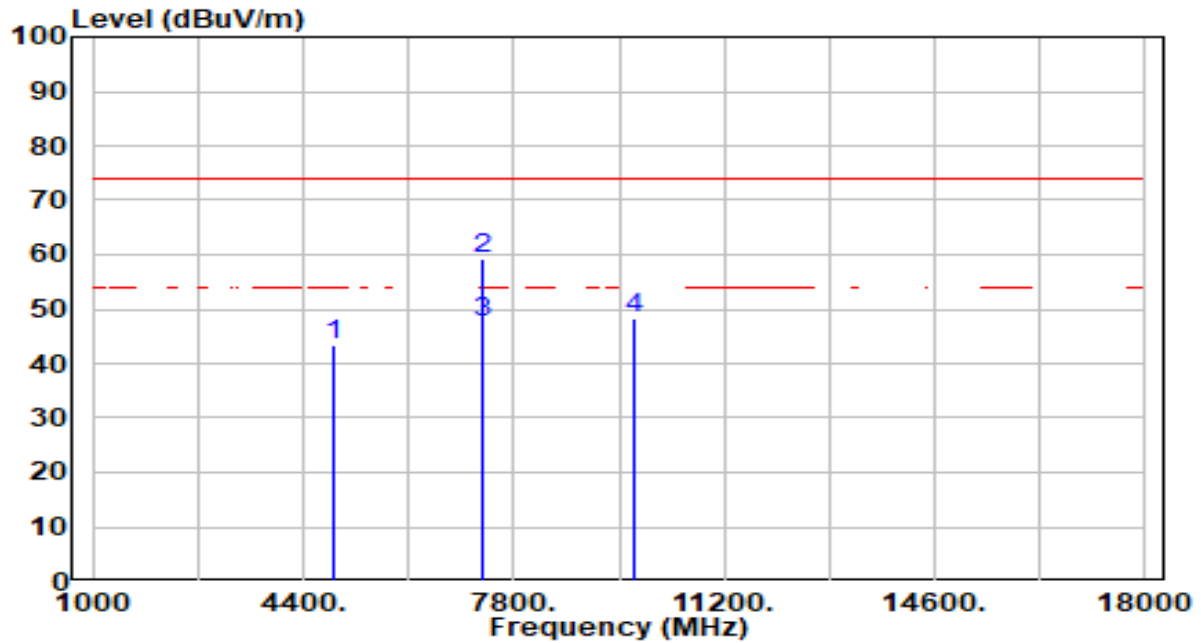


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	41.95	1.48	43.43	-30.57	74.00	200	328	Peak
2	*	7311.000	51.08	8.01	59.09	-14.91	74.00	300	25	Peak
3	*	7311.000	39.39	8.01	47.40	-6.60	54.00	300	25	Average
4		9748.000	41.06	7.09	48.15	-25.85	74.00	200	186	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

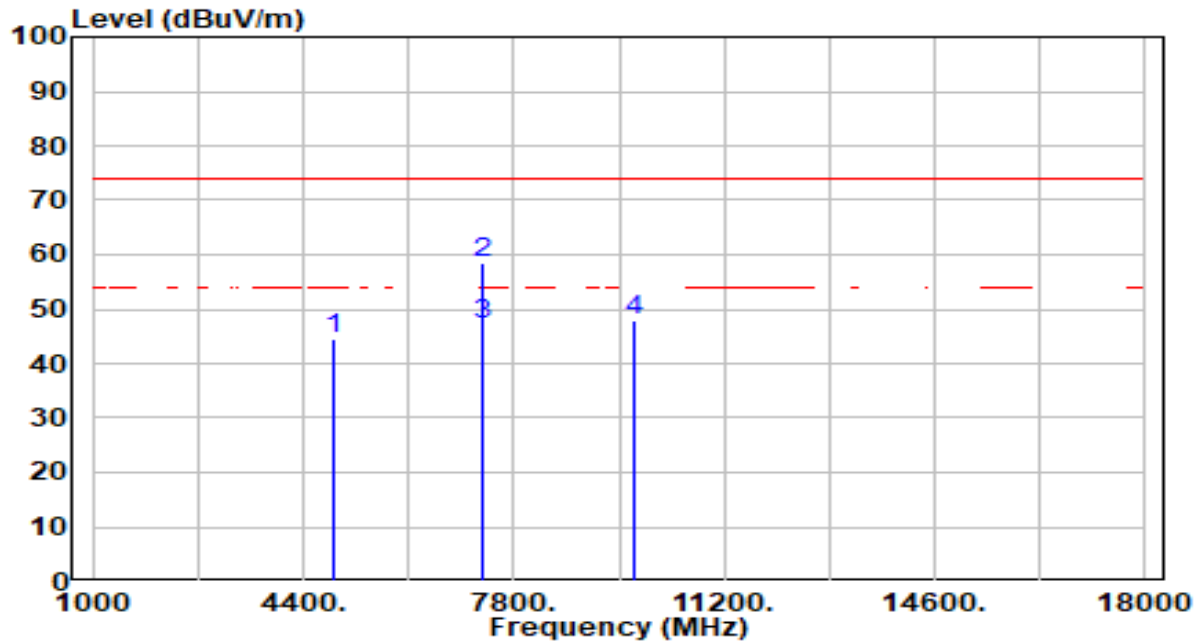


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	42.86	1.48	44.34	-29.66	74.00	300	74	Peak
2	*	7311.000	50.63	8.01	58.64	-15.36	74.00	300	298	Peak
3	*	7311.000	39.07	8.01	47.08	-6.92	54.00	300	298	Average
4		9748.000	40.73	7.09	47.82	-26.18	74.00	100	327	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

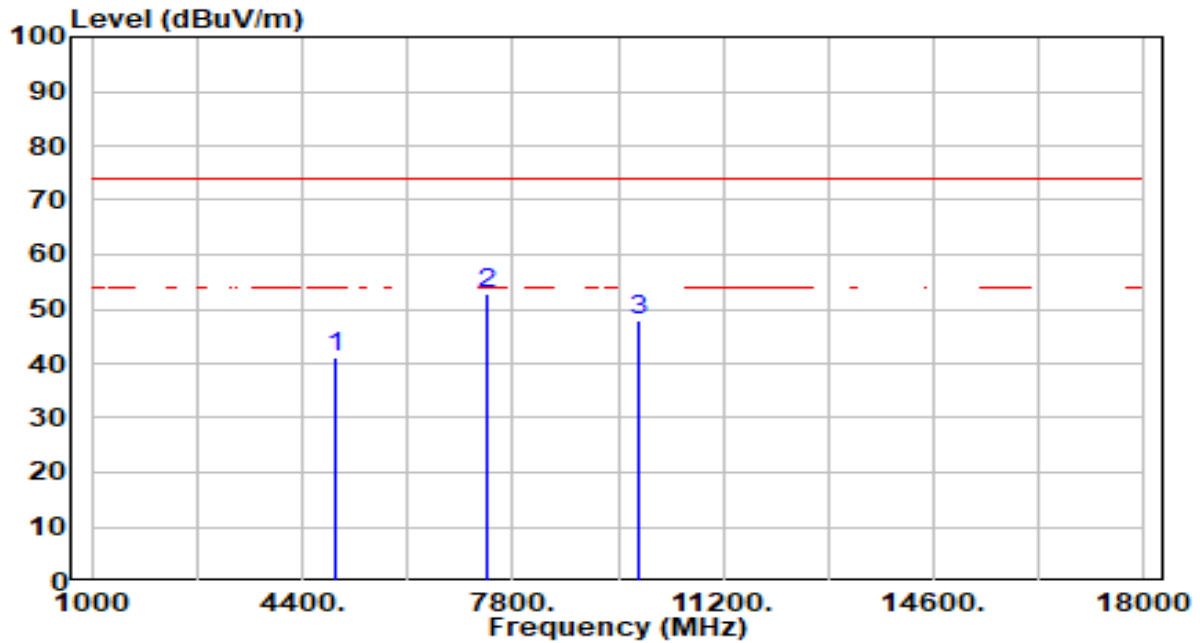


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	39.62	1.62	41.24	-32.76	74.00	200	285	Peak
2	*	7386.000	44.62	8.23	52.84	-21.16	74.00	100	266	Peak
3		9848.000	40.59	7.18	47.77	-26.23	74.00	100	106	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

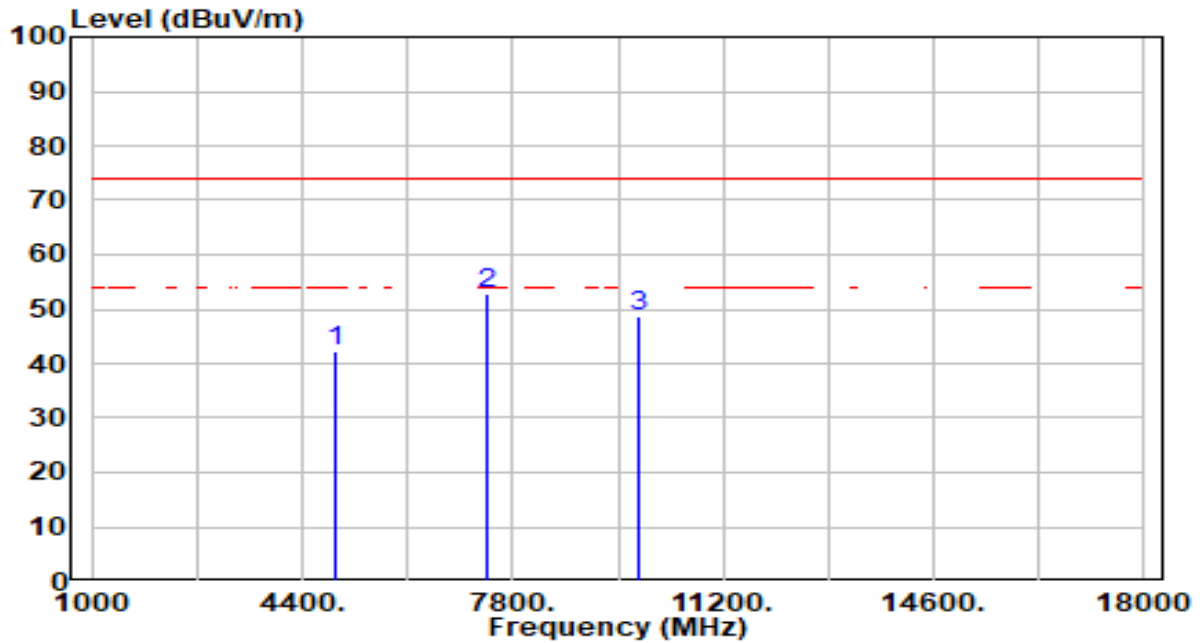


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.49	1.62	42.11	-31.89	74.00	300	68	Peak
2	* 7386.000	44.66	8.23	52.89	-21.11	74.00	100	314	Peak
3	9848.000	41.43	7.18	48.61	-25.39	74.00	200	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

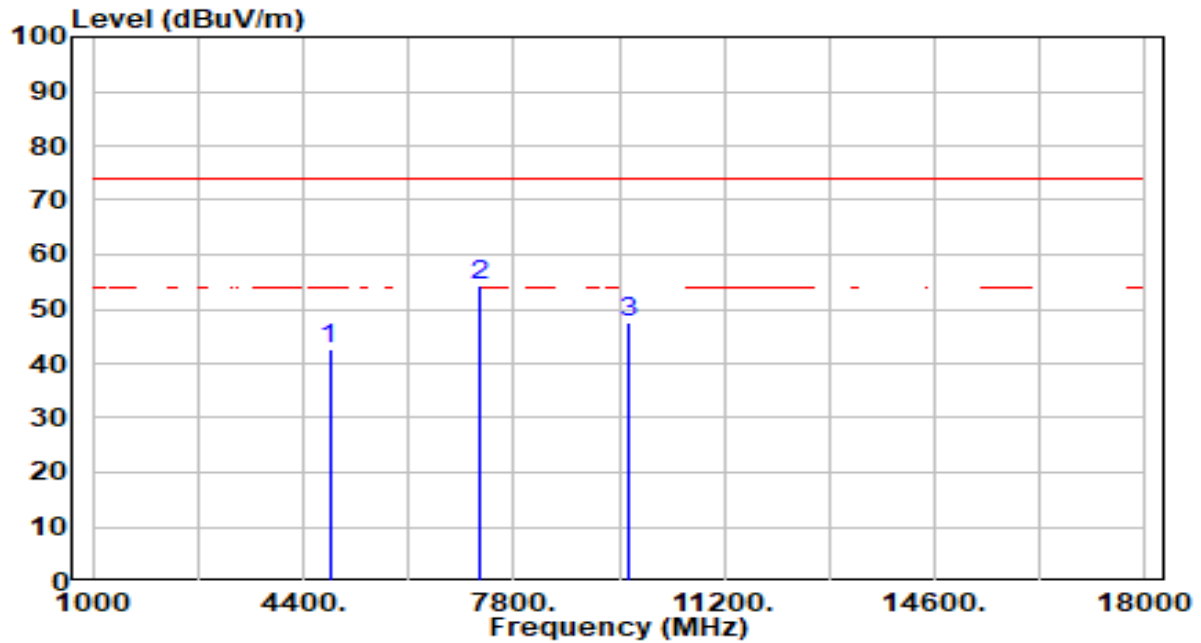


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.27	1.37	42.63	-31.37	74.00	100	72	Peak
2	* 7236.000	46.47	7.76	54.23	-19.77	74.00	103	360	Peak
3	9648.000	40.41	7.05	47.46	-26.54	74.00	300	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

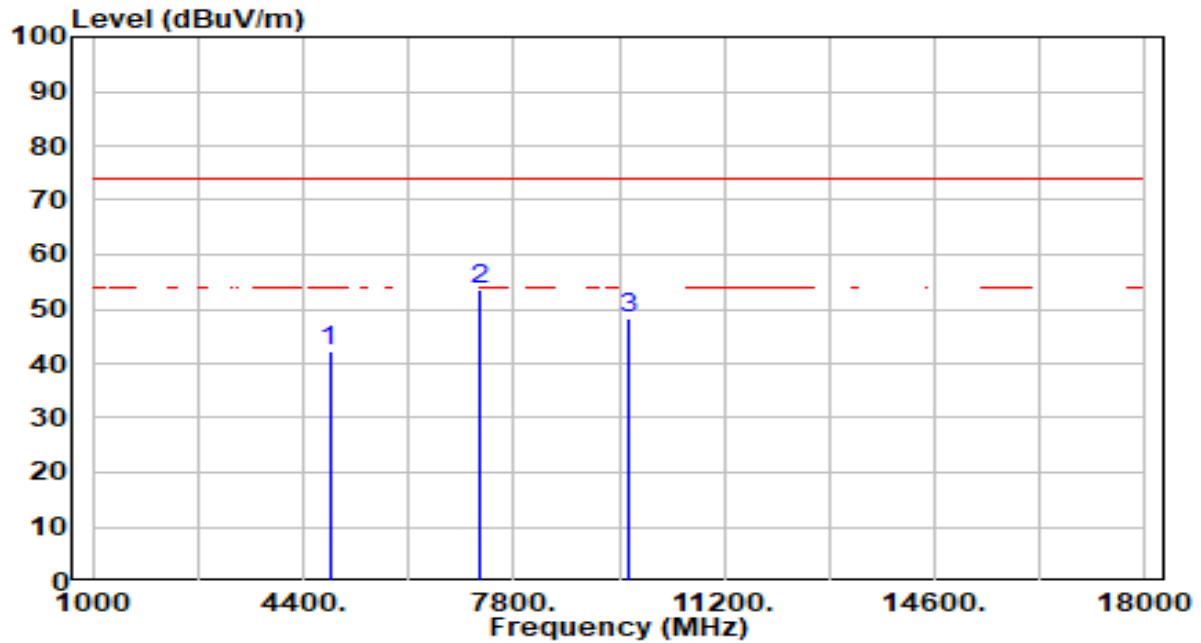


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	40.83	1.37	42.20	-31.80	74.00	300	44	Peak
2	*	7236.000	45.98	7.76	53.74	-20.26	74.00	300	296	Peak
3		9648.000	41.18	7.05	48.23	-25.77	74.00	100	81	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

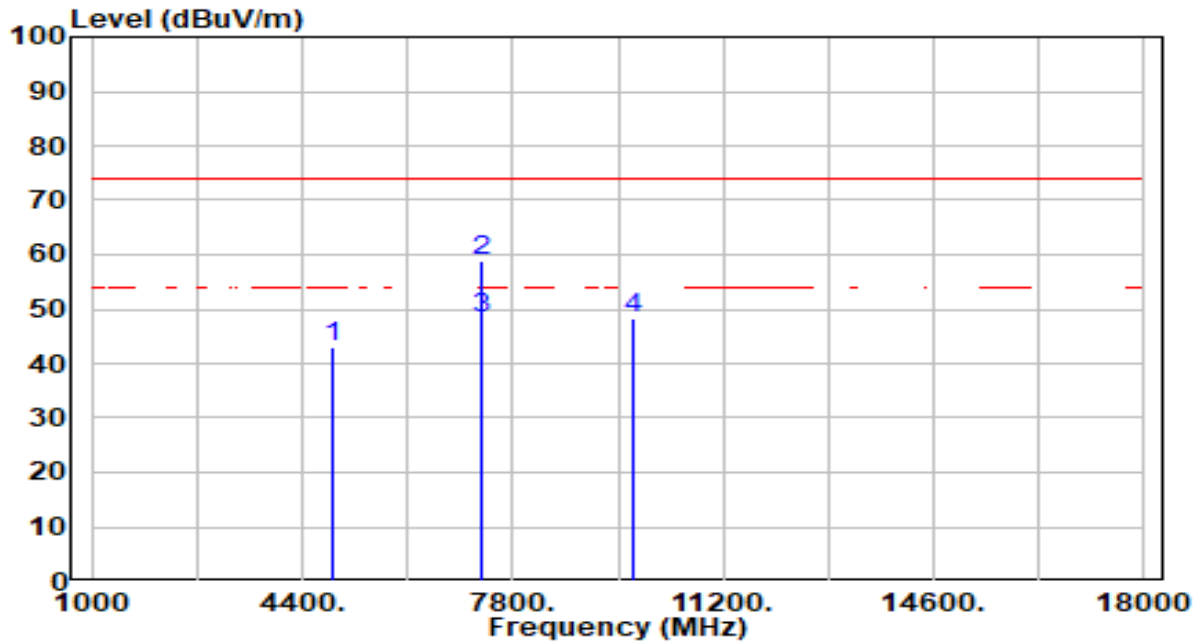


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	41.71	1.48	43.19	-30.81	74.00	200	268	Peak
2	*	7311.000	50.75	8.01	58.75	-15.25	74.00	100	355	Peak
3	*	7311.000	40.13	8.01	48.14	-5.86	54.00	100	355	Average
4		9748.000	41.22	7.09	48.31	-25.69	74.00	300	278	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

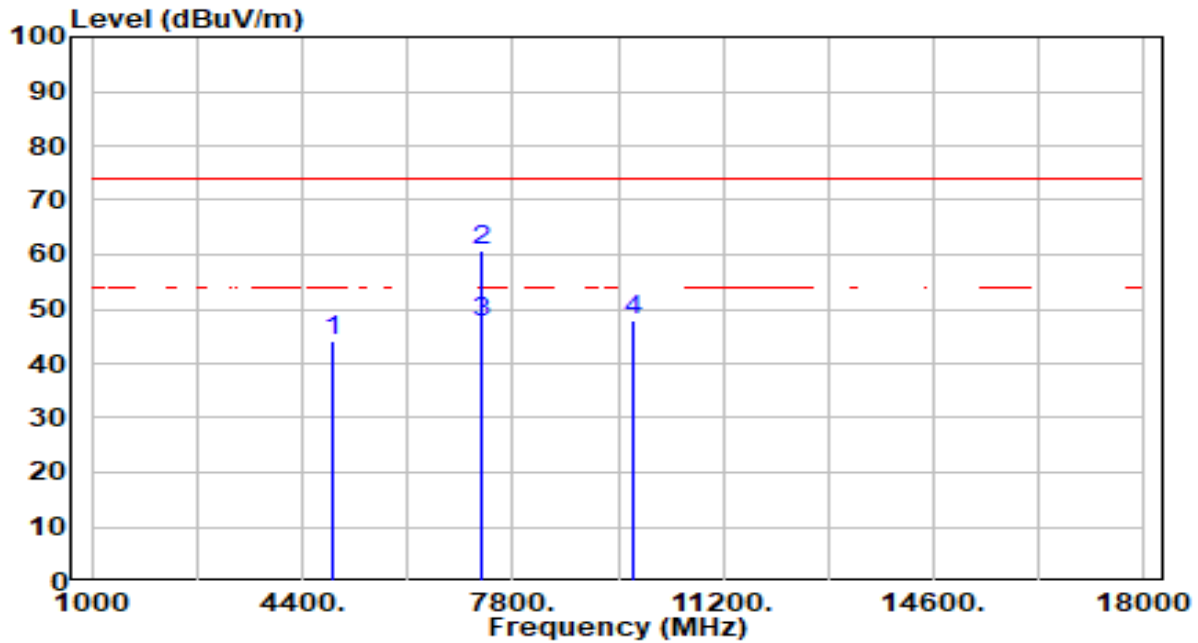


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	42.80	1.48	44.27	-29.73	74.00	200	86	Peak
2	*	7311.000	52.65	8.01	60.66	-13.34	74.00	100	158	Peak
3	*	7311.000	39.70	8.01	47.71	-6.29	54.00	100	158	Average
4		9748.000	40.71	7.09	47.81	-26.19	74.00	182	358	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

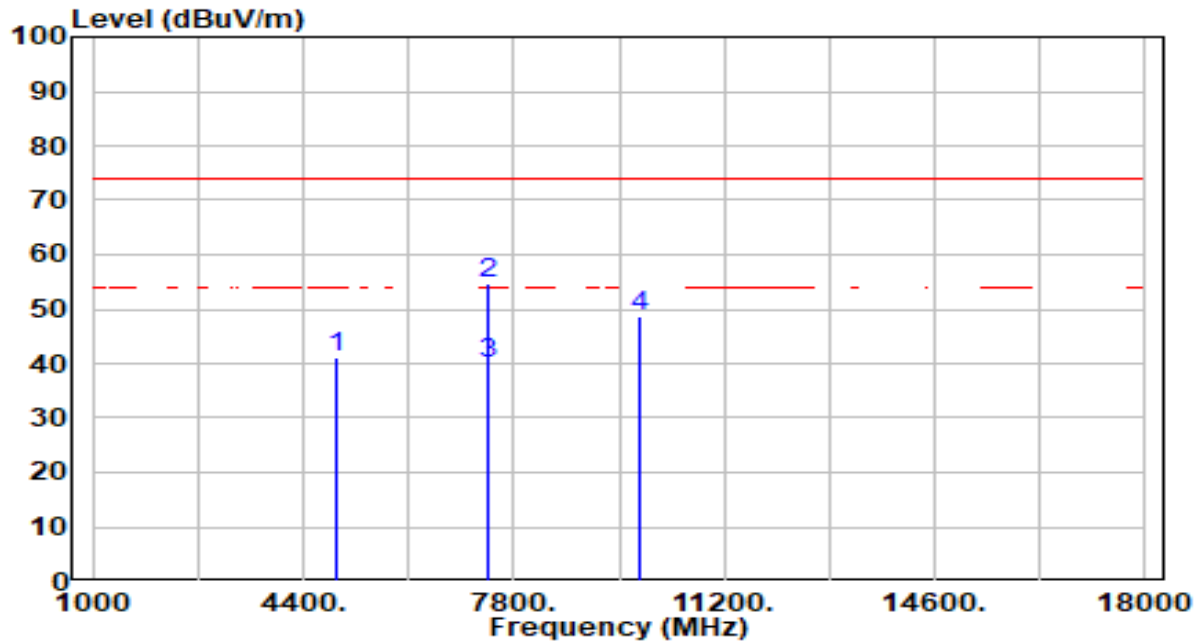


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	39.62	1.62	41.24	-32.76	74.00	300	295	Peak
2	*	7386.000	46.41	8.23	54.64	-19.36	74.00	300	191	Peak
3	*	7386.000	31.95	8.23	40.18	-13.82	54.00	300	191	Average
4		9848.000	41.40	7.18	48.58	-25.42	74.00	238	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

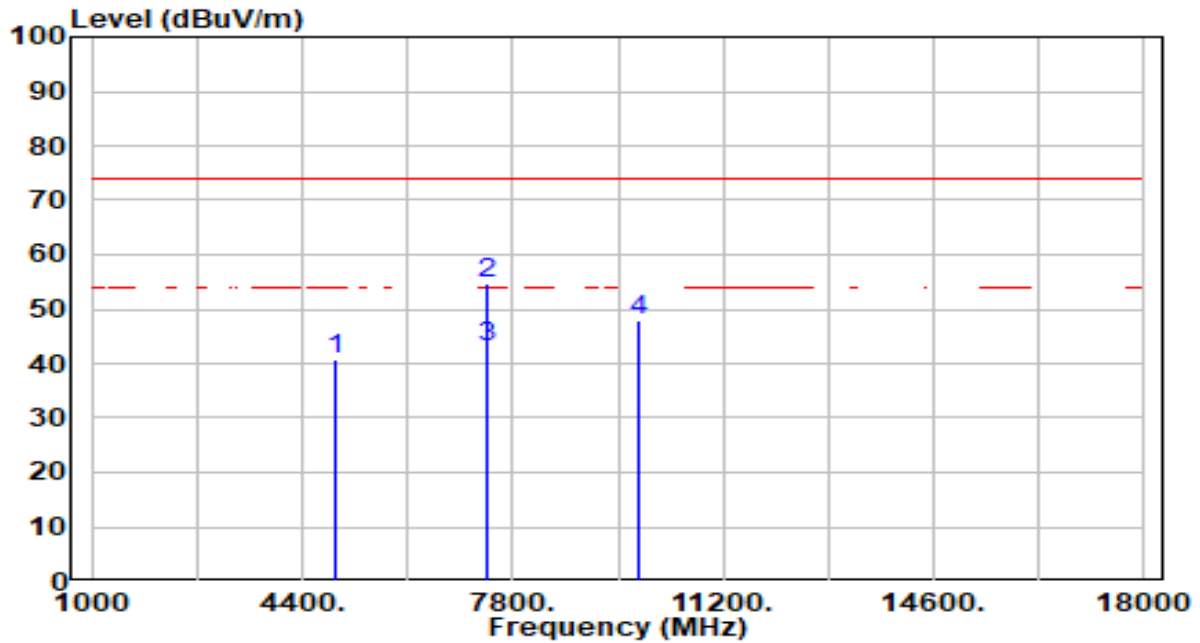


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	39.18	1.62	40.80	-33.20	74.00	200	0	Peak
2	*	7386.000	46.62	8.23	54.84	-19.16	74.00	100	182	Peak
3	*	7386.000	34.86	8.23	43.09	-10.91	54.00	100	182	Average
4		9848.000	40.70	7.18	47.88	-26.12	74.00	100	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

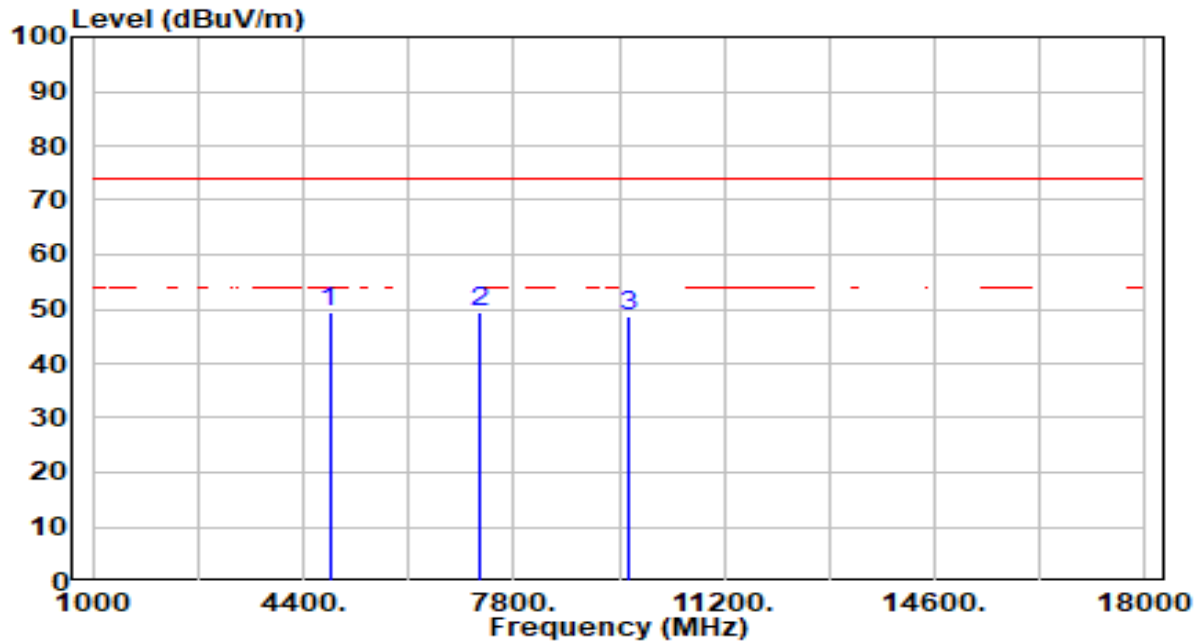


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	48.13	1.37	49.50	-24.50	74.00	200	268	Peak
2		7236.000	41.69	7.76	49.45	-24.55	74.00	255	0	Peak
3		9648.000	41.74	7.05	48.79	-25.21	74.00	200	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

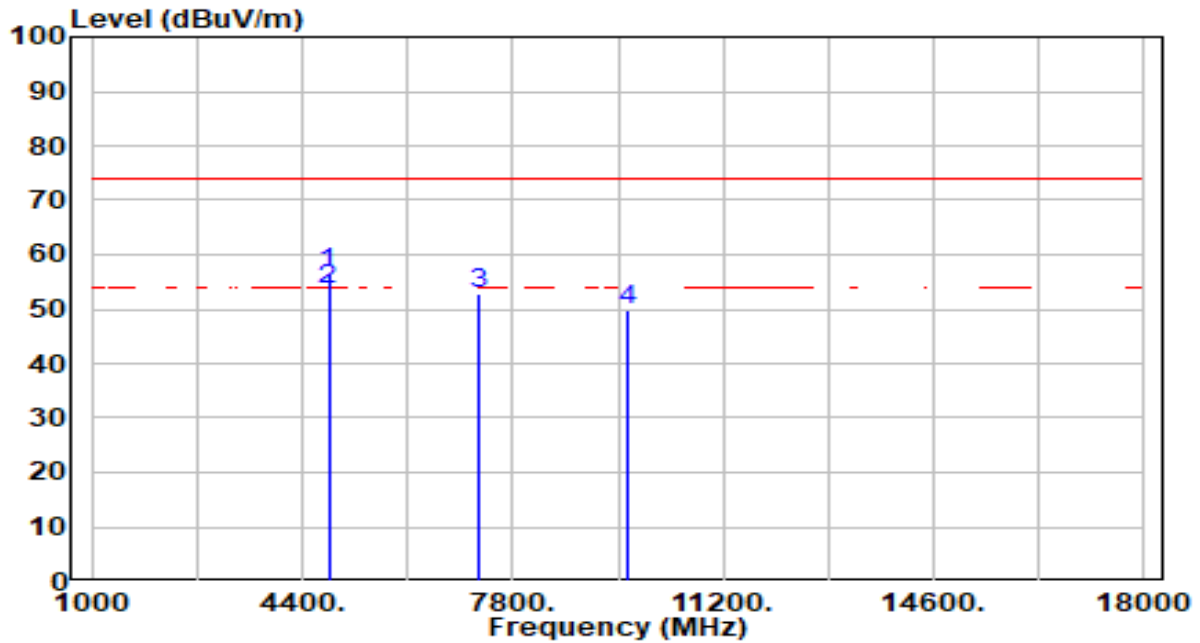


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	55.26	1.37	56.63	-17.37	74.00	100	62	Peak
2	*	4824.000	52.33	1.37	53.70	-0.30	54.00	100	62	Average
3		7236.000	45.14	7.76	52.90	-21.10	74.00	300	241	Peak
4		9648.000	42.59	7.05	49.64	-24.36	74.00	200	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

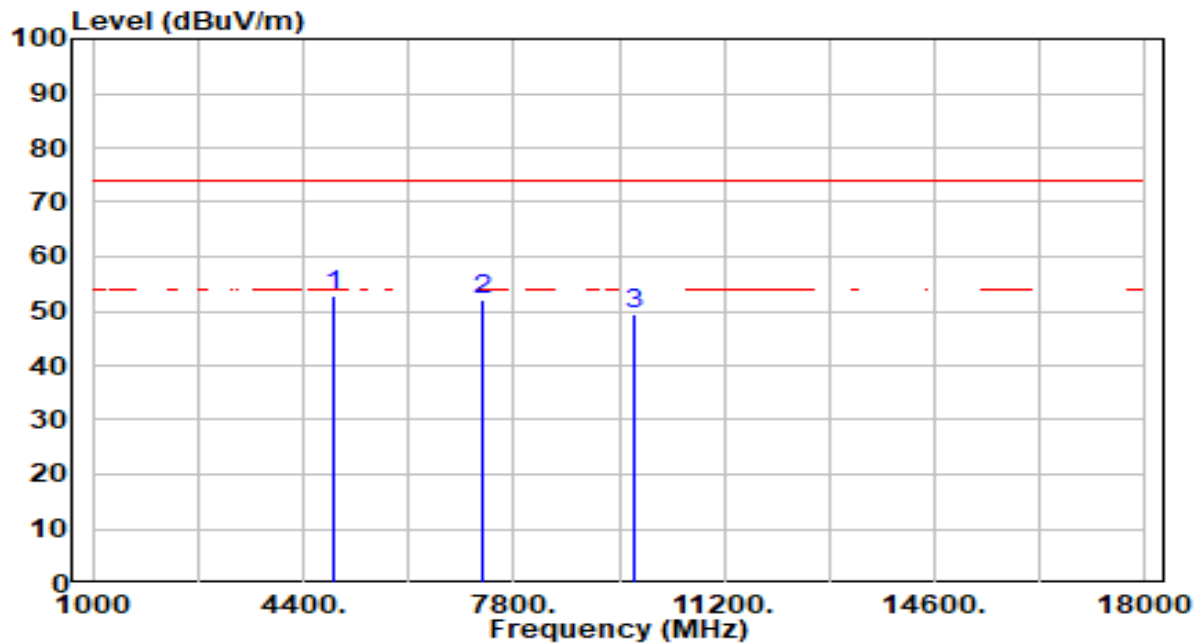


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	51.29	1.48	52.77	-21.23	74.00	200	110	Peak
2		7311.000	44.05	8.01	52.06	-21.94	74.00	240	360	Peak
3		9748.000	42.26	7.09	49.35	-24.65	74.00	300	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

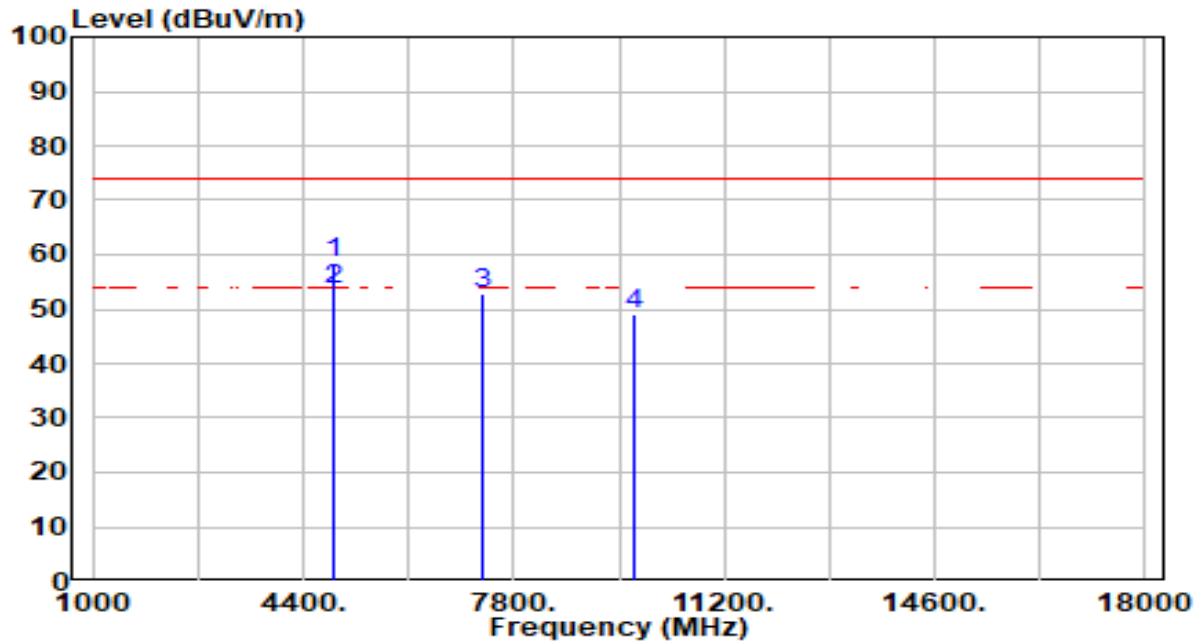


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	57.18	1.48	58.65	-15.35	74.00	100	62	Peak
2	*	4874.000	52.24	1.48	53.72	-0.28	54.00	100	62	Average
3		7311.000	44.89	8.01	52.90	-21.10	74.00	300	240	Peak
4		9748.000	41.92	7.09	49.01	-24.99	74.00	200	184	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

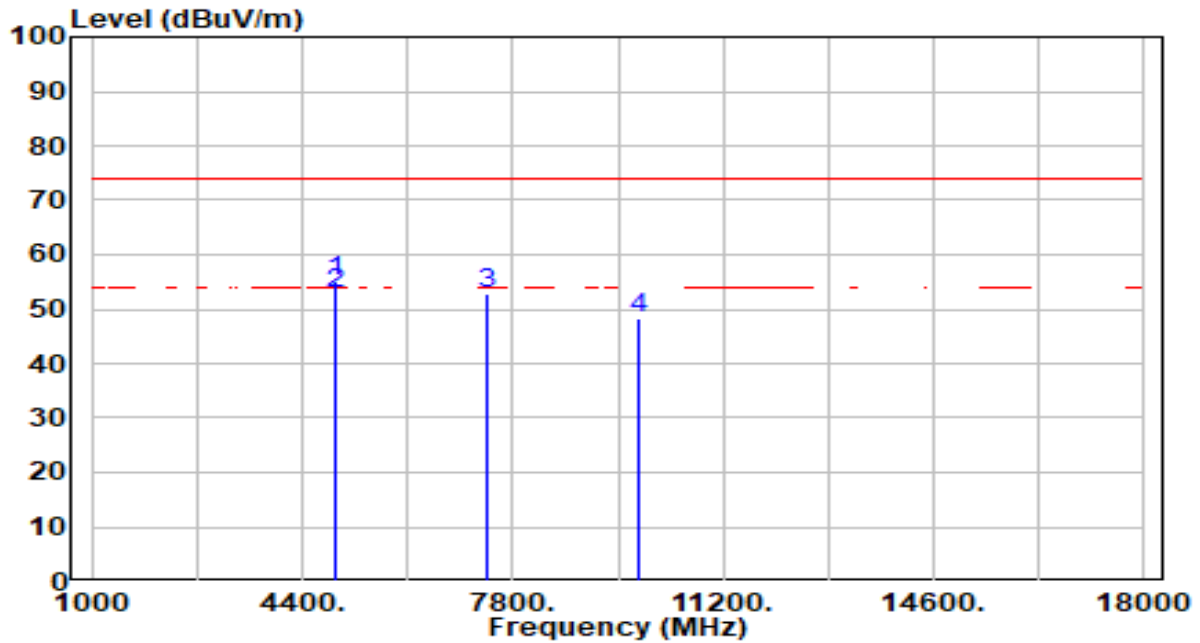


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	53.39	1.62	55.01	-18.99	74.00	200	108	Peak
2	*	4924.000	51.37	1.62	52.99	-1.01	54.00	200	108	Average
3		7386.000	44.45	8.23	52.68	-21.32	74.00	100	43	Peak
4		9848.000	40.95	7.18	48.12	-25.88	74.00	200	132	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

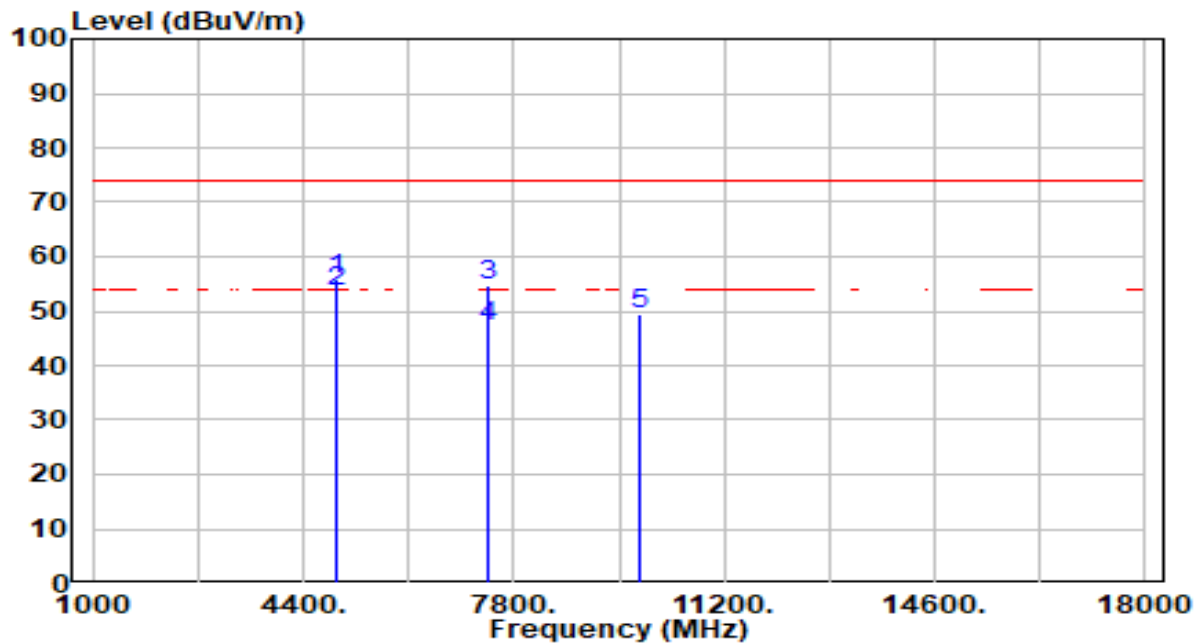


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	54.08	1.62	55.70	-18.30	74.00	100	94	Peak
2	*	4924.000	52.10	1.62	53.72	-0.28	54.00	100	94	Average
3		7386.000	46.33	8.23	54.56	-19.44	74.00	300	162	Peak
4		7386.000	38.96	8.23	47.19	-6.81	54.00	300	162	Average
5		9848.000	42.20	7.18	49.38	-24.62	74.00	300	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

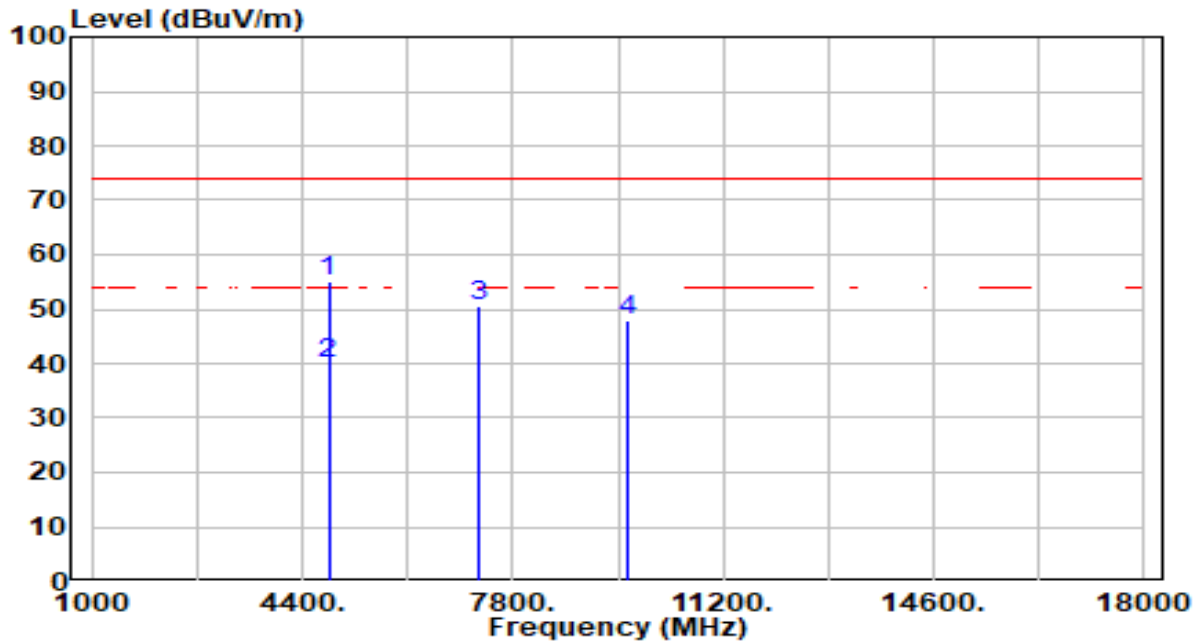


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	53.62	1.37	54.99	-19.01	74.00	300	98	Peak
2	*	4824.000	38.52	1.37	39.89	-14.11	54.00	300	98	Average
3		7236.000	42.90	7.76	50.66	-23.34	74.00	300	35	Peak
4		9648.000	40.98	7.05	48.03	-25.97	74.00	300	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

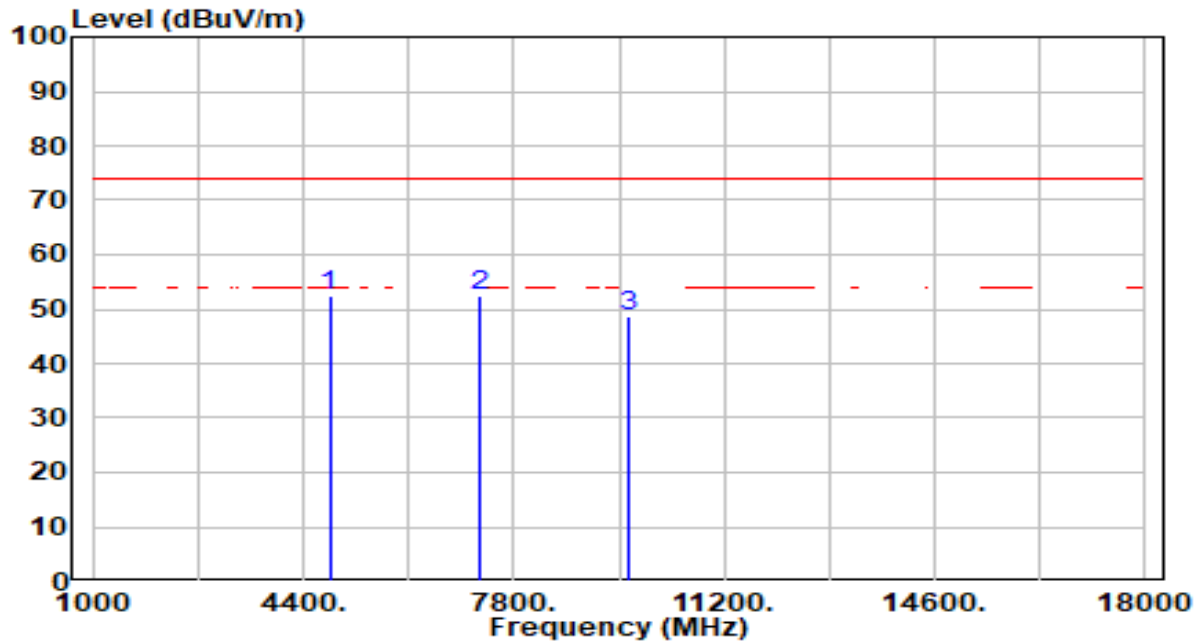


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	51.19	1.37	52.56	-21.44	74.00	100	98	Peak
2		7236.000	44.71	7.76	52.47	-21.53	74.00	300	140	Peak
3		9648.000	41.47	7.05	48.52	-25.48	74.00	300	96	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

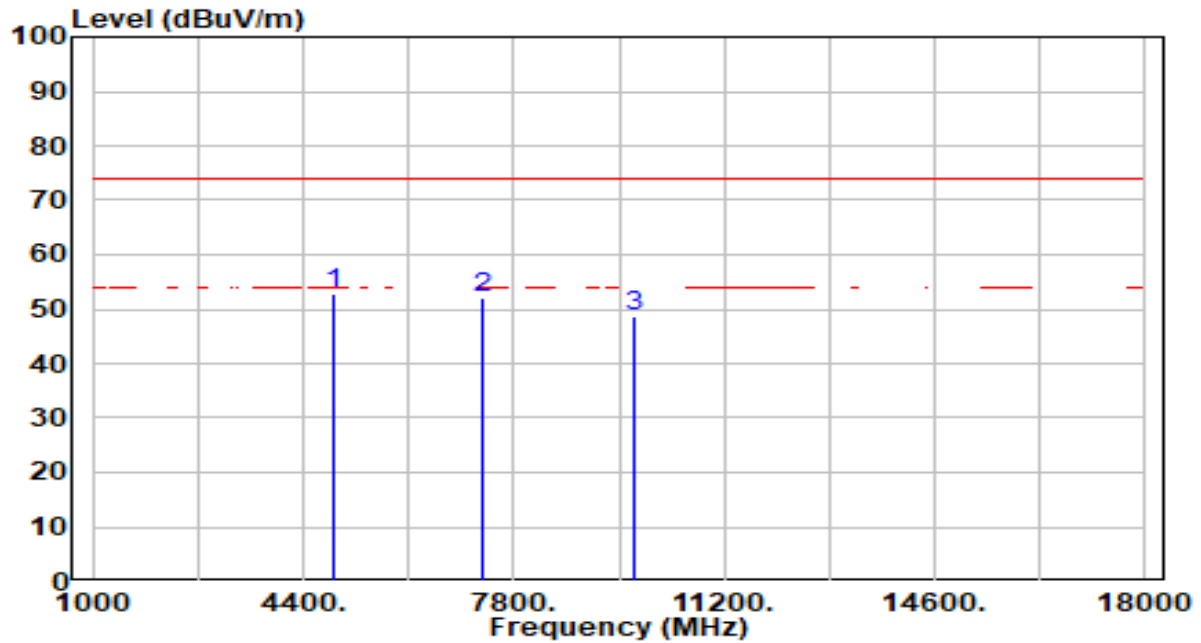


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	51.47	1.48	52.94	-21.06	74.00	100	236	Peak
2		7311.000	43.88	8.01	51.89	-22.11	74.00	200	0	Peak
3		9748.000	41.48	7.09	48.57	-25.43	74.00	300	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

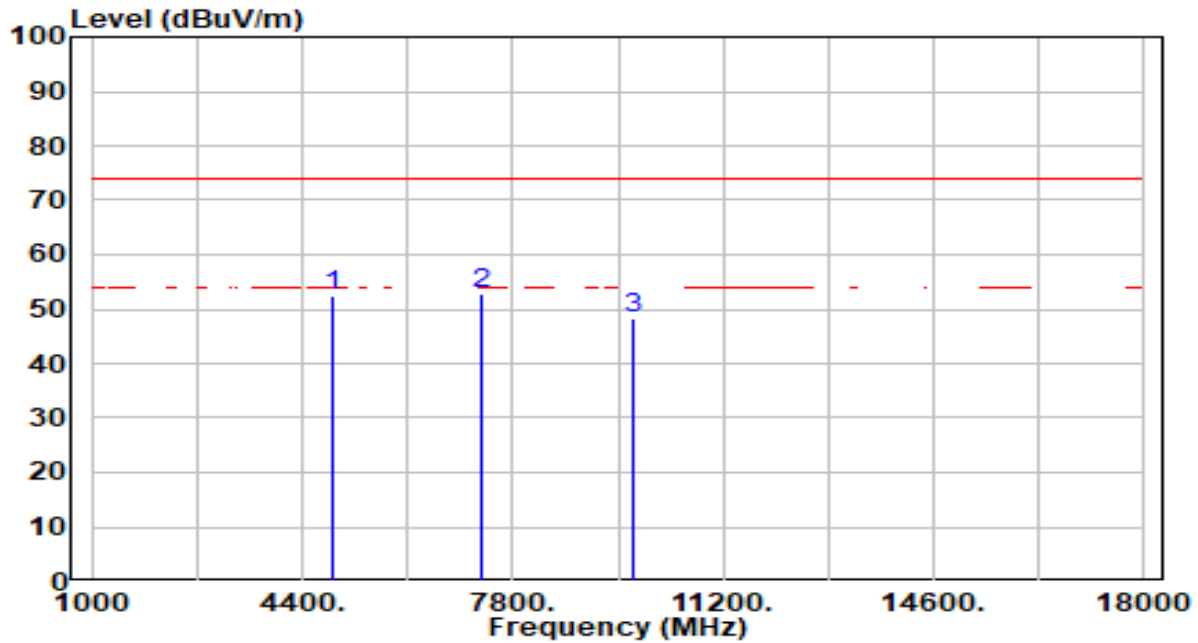


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	51.11	1.48	52.58	-21.42	74.00	200	36	Peak
2	*	7311.000	44.77	8.01	52.78	-21.22	74.00	300	155	Peak
3		9748.000	41.28	7.09	48.37	-25.63	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

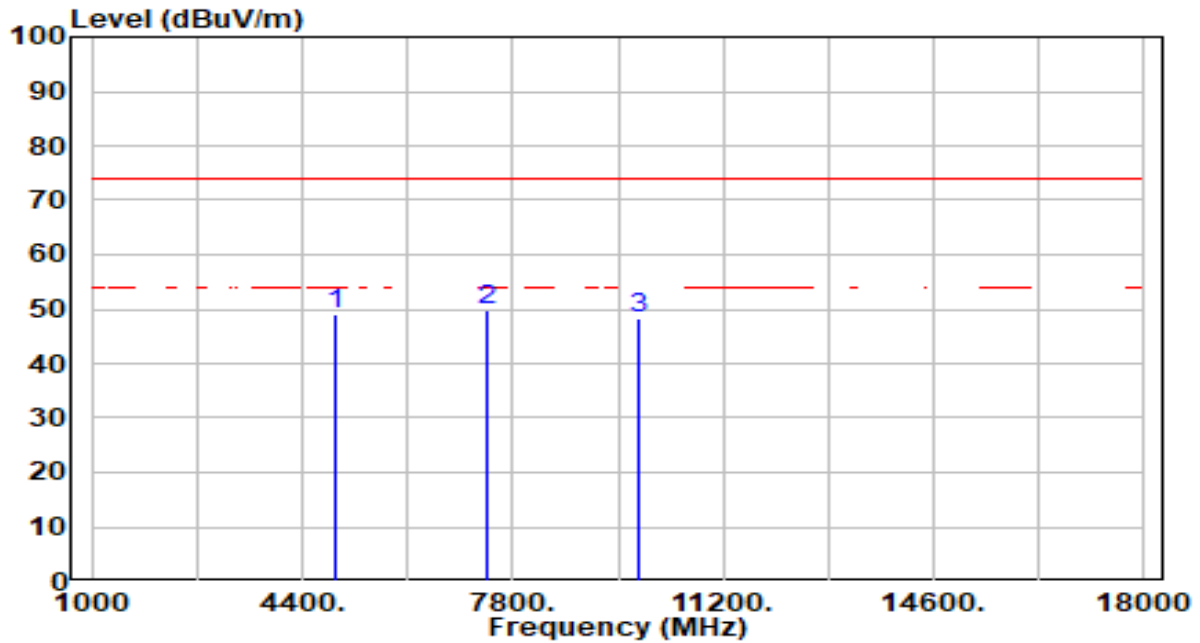


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	47.45	1.62	49.07	-24.93	74.00	300	261	Peak
2	*	7386.000	41.60	8.23	49.82	-24.18	74.00	300	65	Peak
3		9848.000	41.20	7.18	48.38	-25.62	74.00	200	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

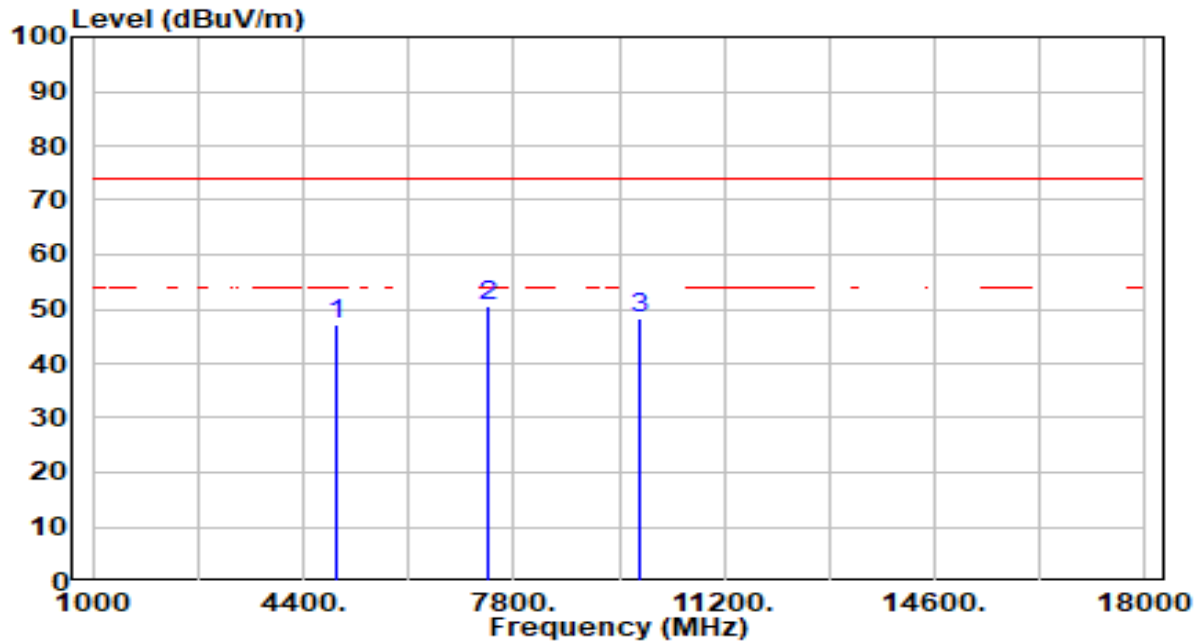


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	45.66	1.62	47.27	-26.73	74.00	100	96	Peak
2	*	7386.000	42.32	8.23	50.55	-23.45	74.00	300	360	Peak
3		9848.000	41.14	7.18	48.31	-25.69	74.00	300	262	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

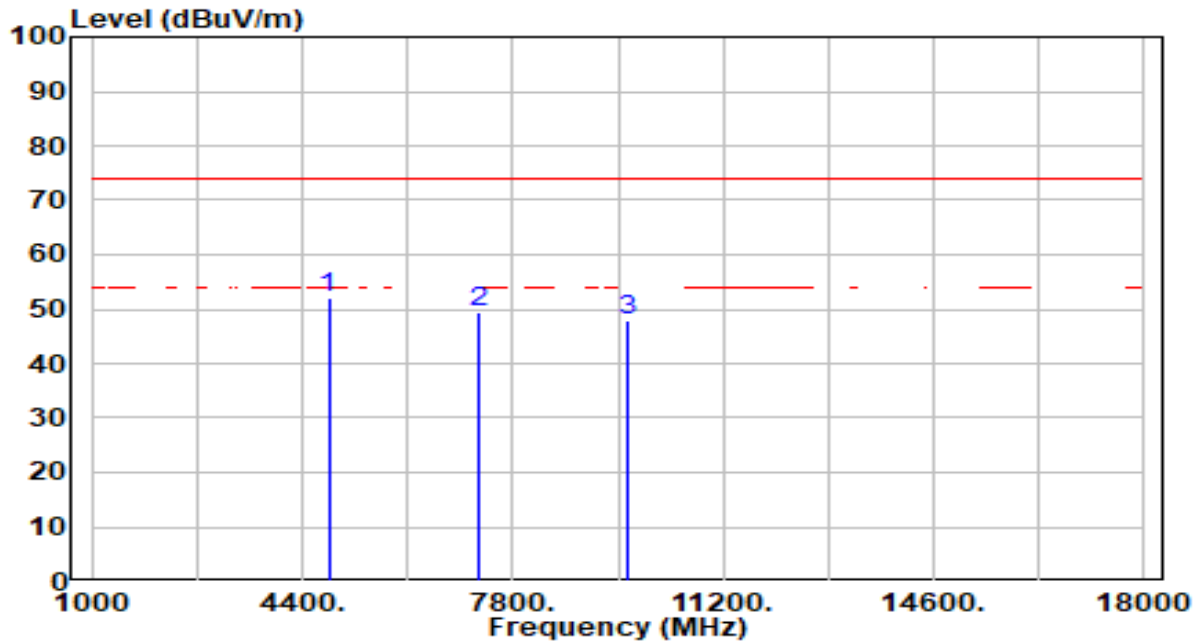


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	50.53	1.37	51.90	-22.10	74.00	200	267	Peak
2		7236.000	41.61	7.76	49.37	-24.63	74.00	300	0	Peak
3		9648.000	40.90	7.05	47.95	-26.05	74.00	300	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

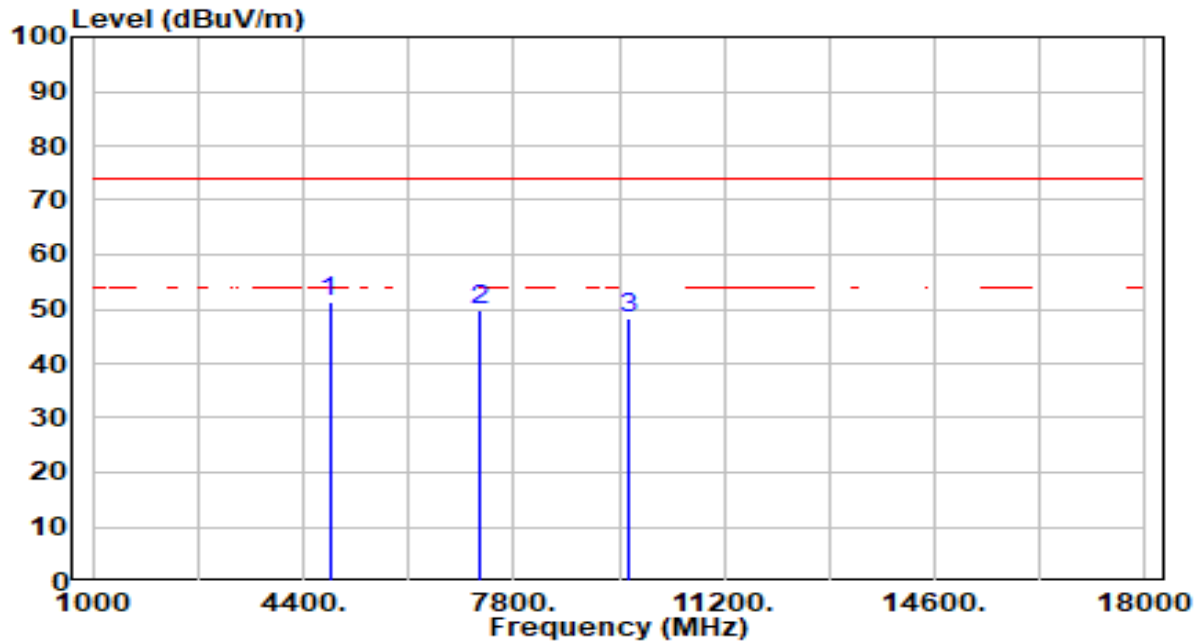


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	49.99	1.37	51.35	-22.65	74.00	300	51	Peak
2		7236.000	42.00	7.76	49.76	-24.24	74.00	264	360	Peak
3		9648.000	41.33	7.05	48.38	-25.62	74.00	200	272	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

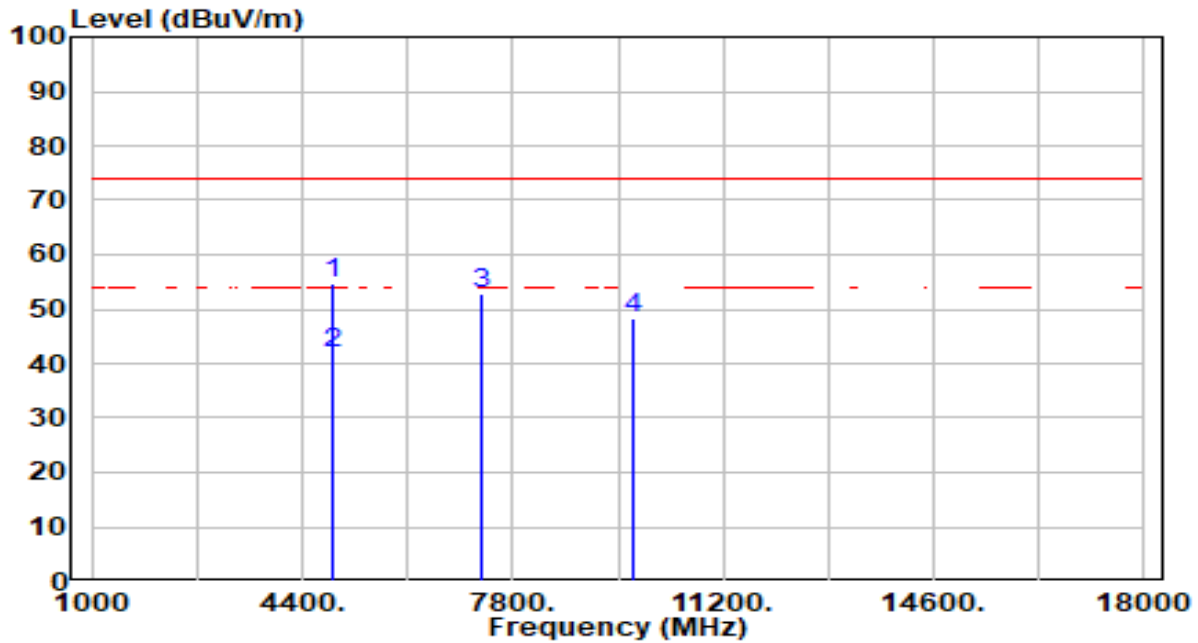


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	53.23	1.48	54.70	-19.30	74.00	200	91	Peak
2	*	4874.000	40.39	1.48	41.87	-12.13	54.00	200	91	Average
3		7311.000	44.98	8.01	52.99	-21.01	74.00	100	289	Peak
4		9748.000	41.20	7.09	48.29	-25.71	74.00	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

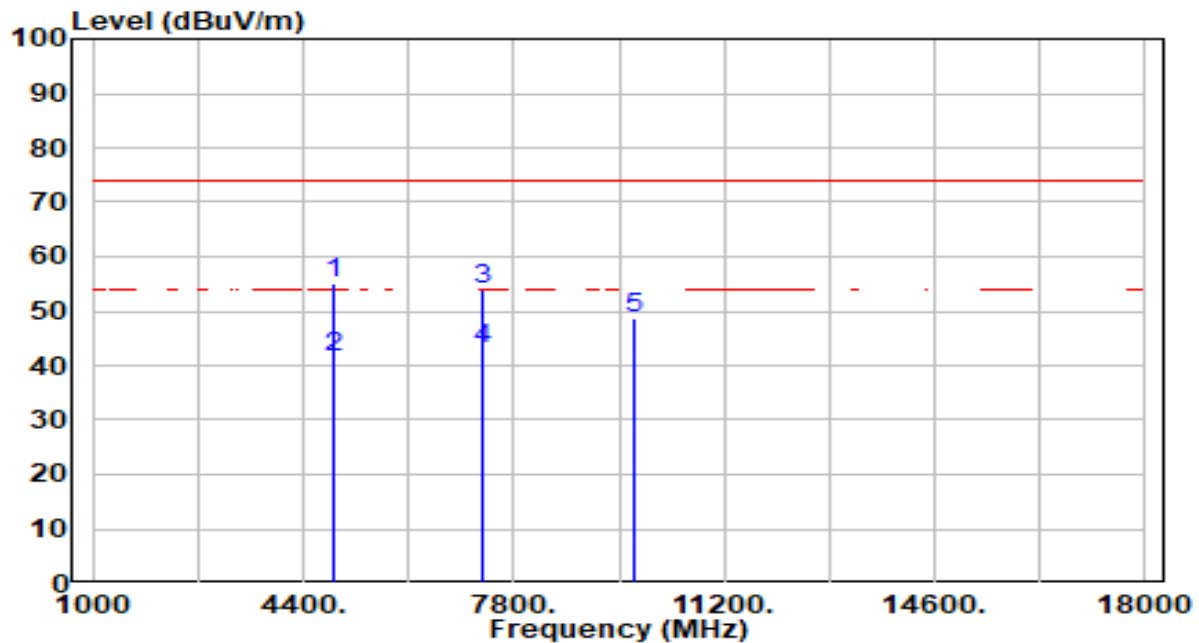


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	53.54	1.48	55.02	-18.98	74.00	300	52	Peak
2		4874.000	40.18	1.48	41.66	-12.34	54.00	300	52	Average
3		7311.000	46.10	8.01	54.11	-19.89	74.00	300	246	Peak
4	*	7311.000	34.95	8.01	42.96	-11.04	54.00	300	246	Average
5		9748.000	41.57	7.09	48.66	-25.34	74.00	300	24	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

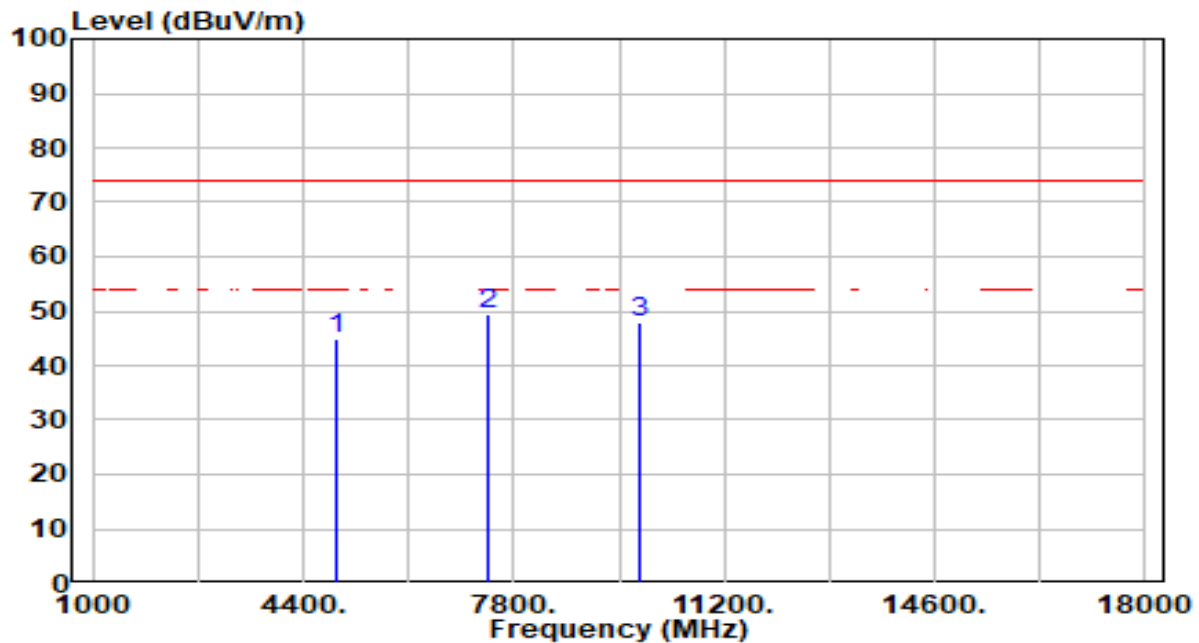


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	43.44	1.62	45.06	-28.94	74.00	300	86	Peak
2	*	7386.000	41.31	8.23	49.54	-24.46	74.00	200	207	Peak
3		9848.000	40.93	7.18	48.11	-25.89	74.00	300	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

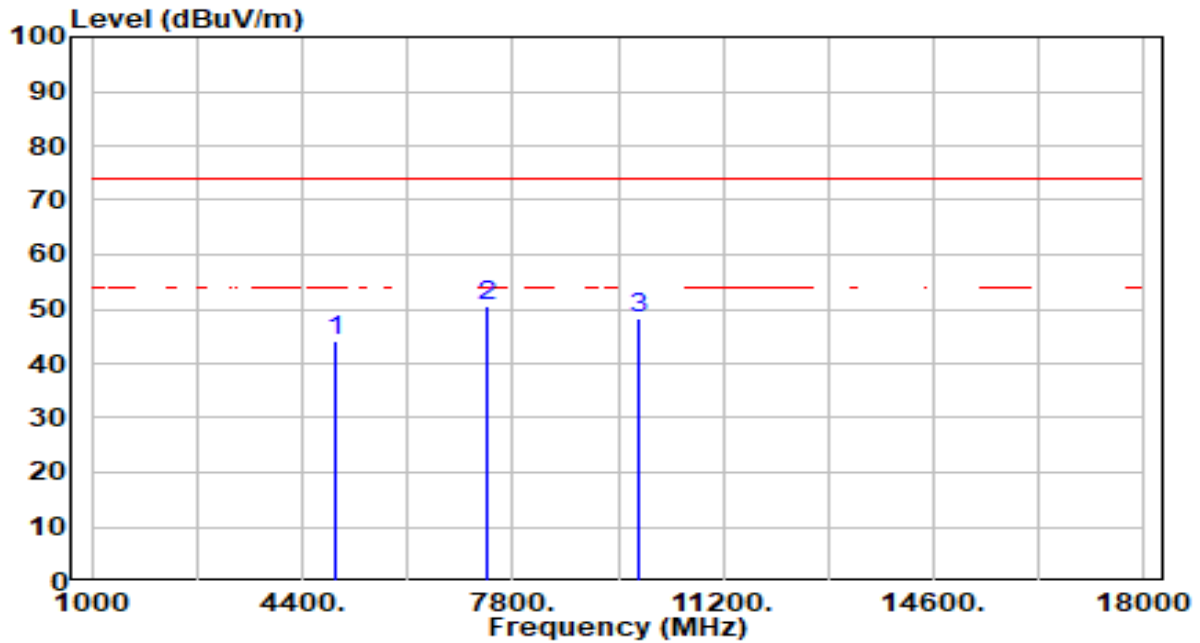

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.57	1.62	44.19	-29.81	74.00	200	335	Peak
2	* 7386.000	42.51	8.23	50.73	-23.27	74.00	289	0	Peak
3	9848.000	40.94	7.18	48.11	-25.89	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4.Test Setup

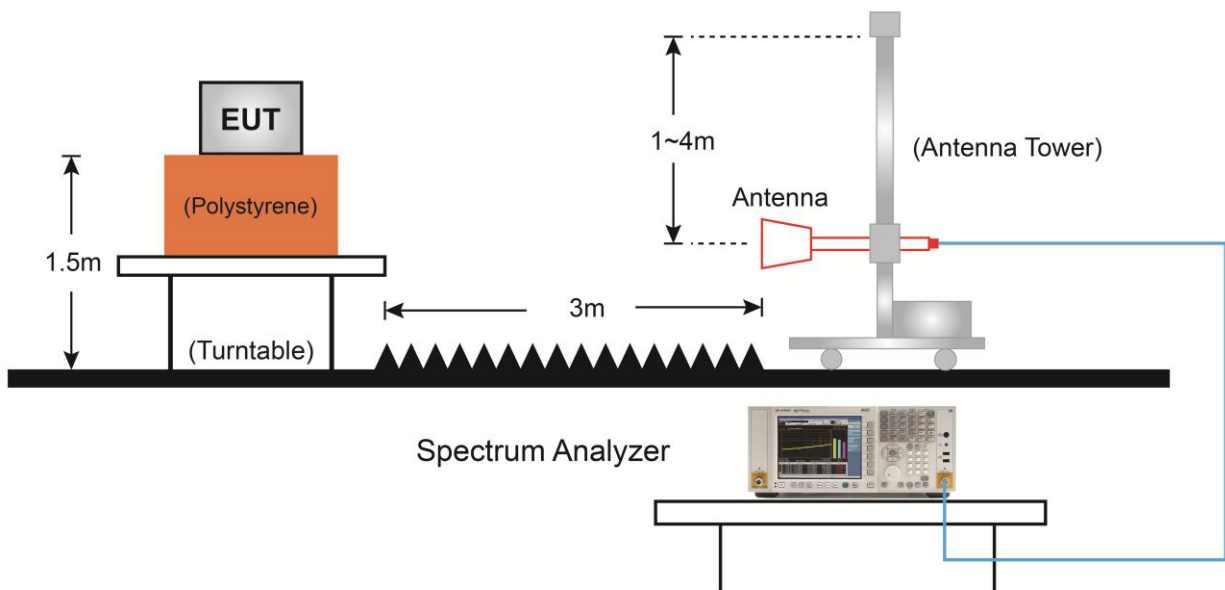

7.7.5.Test Result

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

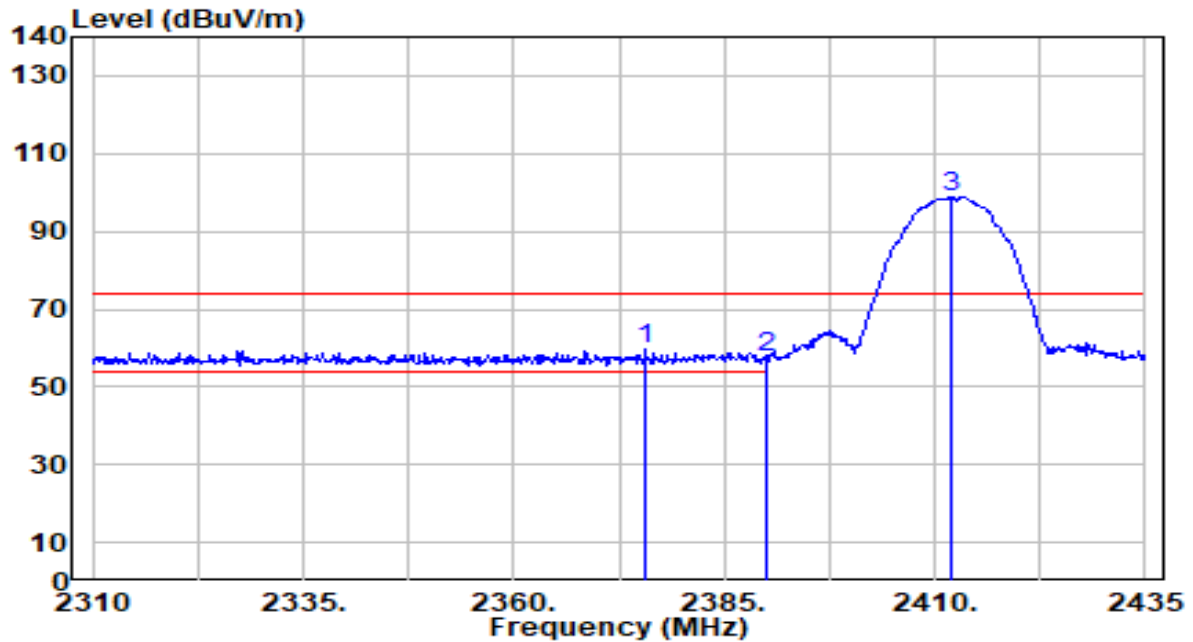


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2375.625	28.50	30.99	59.49	-14.51	74.00	214	153	Peak
2		2390.000	26.67	31.03	57.70	-16.30	74.00	214	153	Peak
3		2412.000	67.96	31.10	99.06	N/A	N/A	214	153	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

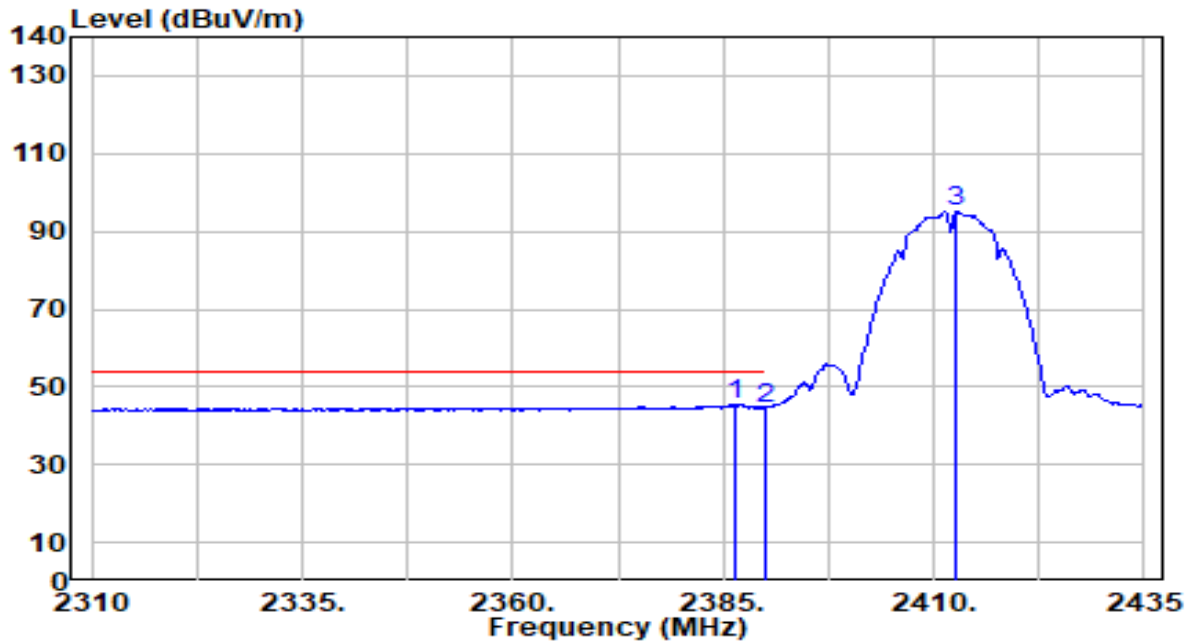


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.375	14.47	31.02	45.49	-8.51	54.00	214	153	Average
2		2390.000	13.59	31.03	44.62	-9.38	54.00	214	153	Average
3		2412.750	63.95	31.10	95.05	N/A	N/A	214	153	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

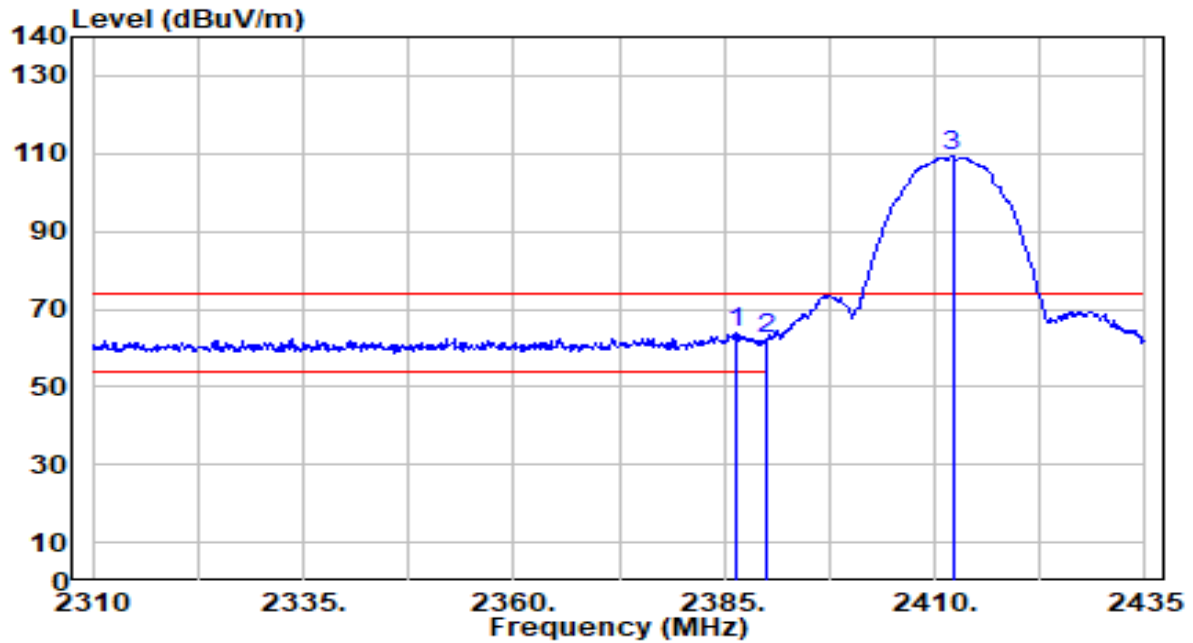


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.500	32.85	31.02	63.87	-10.13	74.00	209	136	Peak
2		2390.000	31.08	31.03	62.11	-11.89	74.00	209	136	Peak
3		2412.125	78.46	31.10	109.56	N/A	N/A	209	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

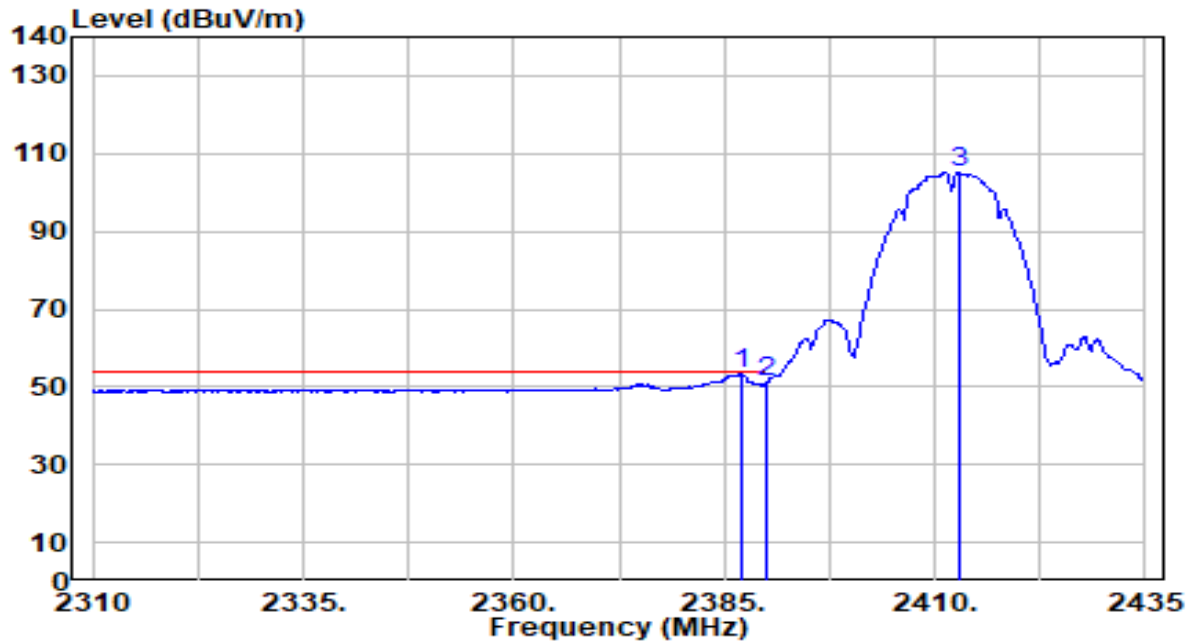


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	22.35	31.02	53.37	-0.63	54.00	209	136	Average
2		2390.000	20.40	31.03	51.43	-2.57	54.00	209	136	Average
3		2412.875	74.28	31.10	105.38	N/A	N/A	209	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

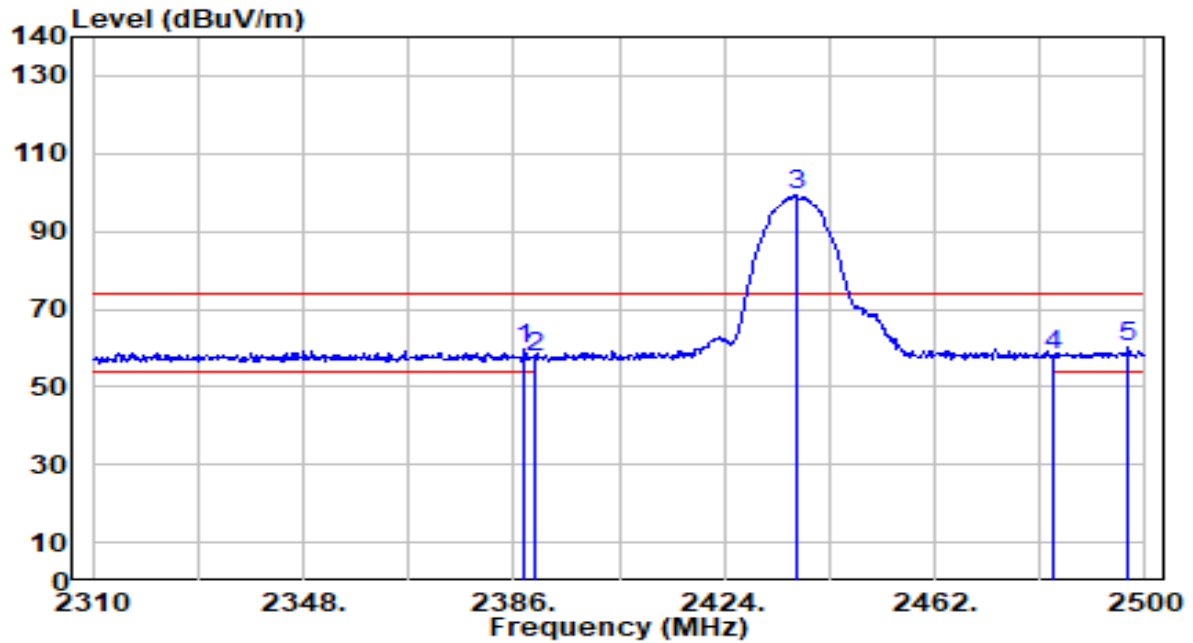


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	28.55	31.03	59.57	-14.43	74.00	288	219	Peak
2	2390.000	26.43	31.03	57.46	-16.54	74.00	288	219	Peak
3	2437.110	68.20	31.19	99.39	N/A	N/A	288	219	Peak
4	2483.500	26.78	31.35	58.14	-15.86	74.00	288	219	Peak
5	* 2496.960	28.63	31.40	60.03	-13.97	74.00	288	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

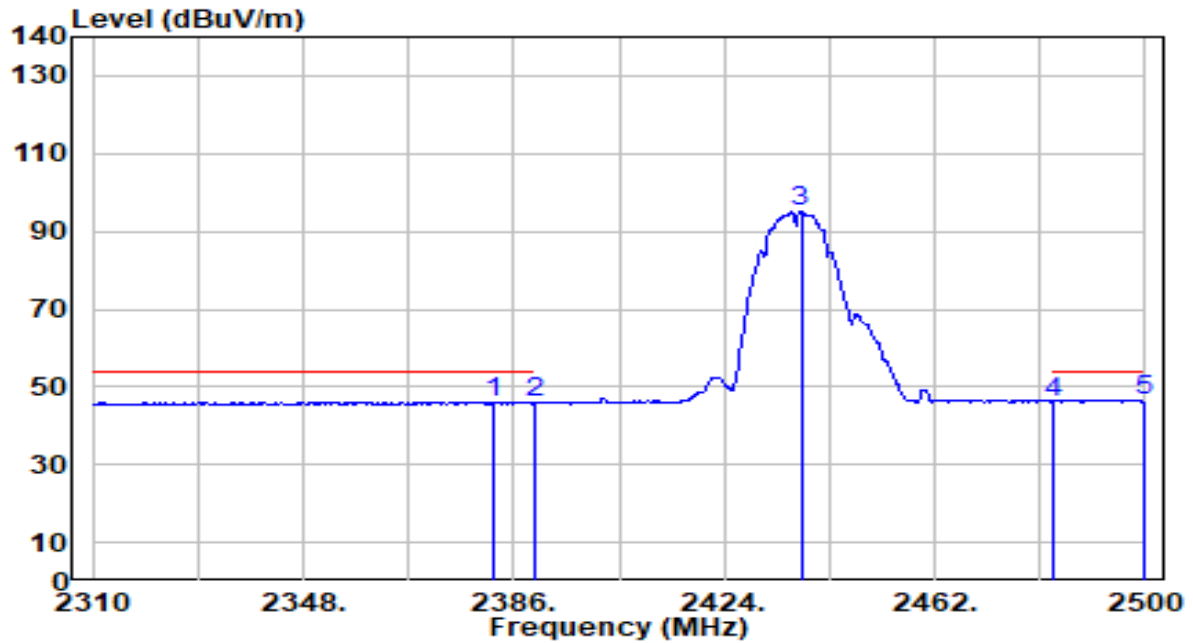


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.200	15.02	31.01	46.03	-7.97	54.00	288	219	Average
2	2390.000	14.77	31.03	45.80	-8.20	54.00	288	219	Average
3	2437.870	63.90	31.19	95.09	N/A	N/A	288	219	Average
4	2483.500	14.87	31.35	46.22	-7.78	54.00	288	219	Average
5	* 2499.620	15.29	31.41	46.70	-7.30	54.00	288	219	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

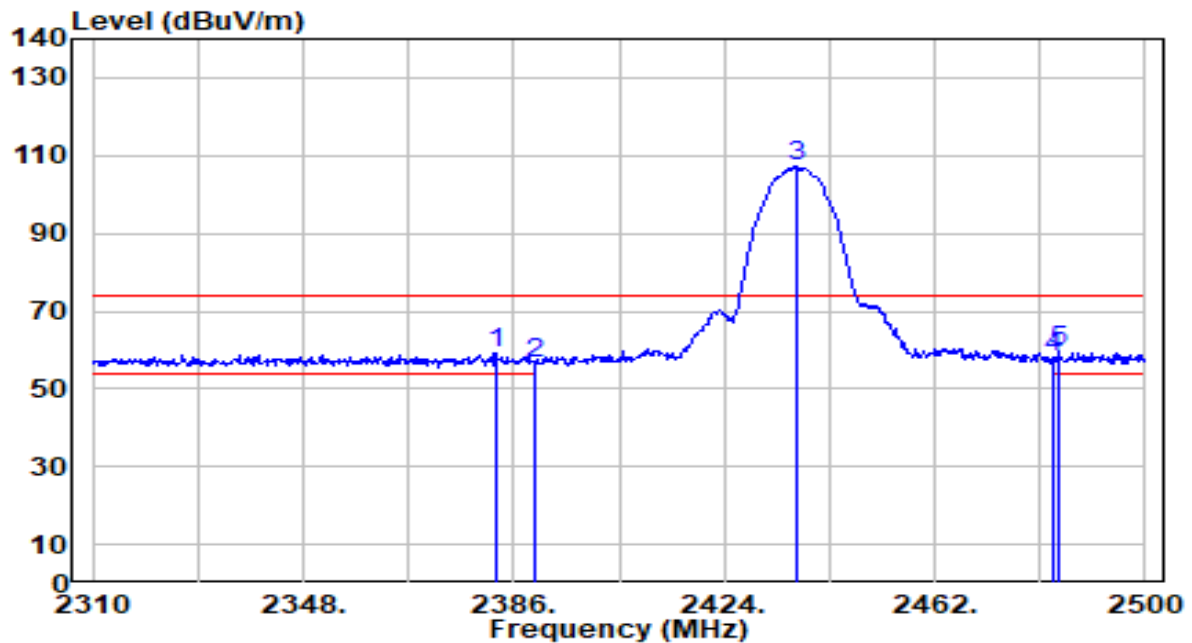


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.770	28.13	31.01	59.14	-14.86	74.00	202	148	Peak
2	2390.000	25.75	31.03	56.78	-17.22	74.00	202	148	Peak
3	2437.110	76.19	31.19	107.37	N/A	N/A	202	148	Peak
4	2483.500	26.50	31.35	57.85	-16.15	74.00	202	148	Peak
5	* 2484.610	28.16	31.36	59.52	-14.48	74.00	202	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

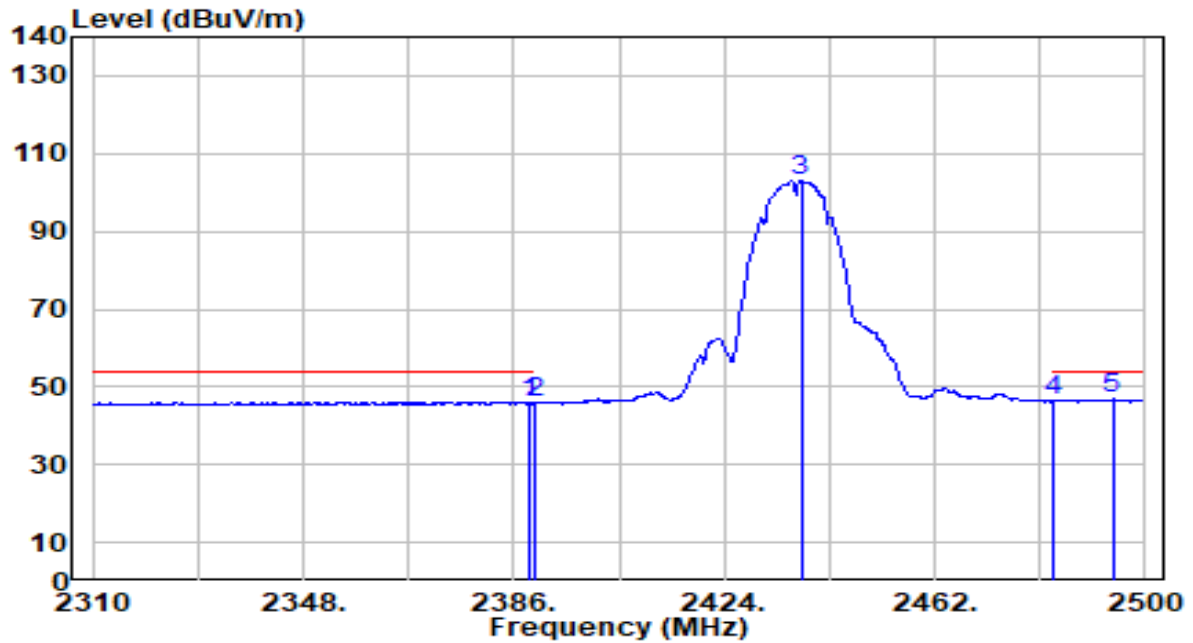


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	15.20	31.03	46.22	-7.78	54.00	202	148	Average
2	2390.000	15.10	31.03	46.13	-7.87	54.00	202	148	Average
3	2437.870	71.91	31.19	103.10	N/A	N/A	202	148	Average
4	2483.500	15.19	31.35	46.54	-7.46	54.00	202	148	Average
5	* 2494.110	15.38	31.39	46.76	-7.24	54.00	202	148	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

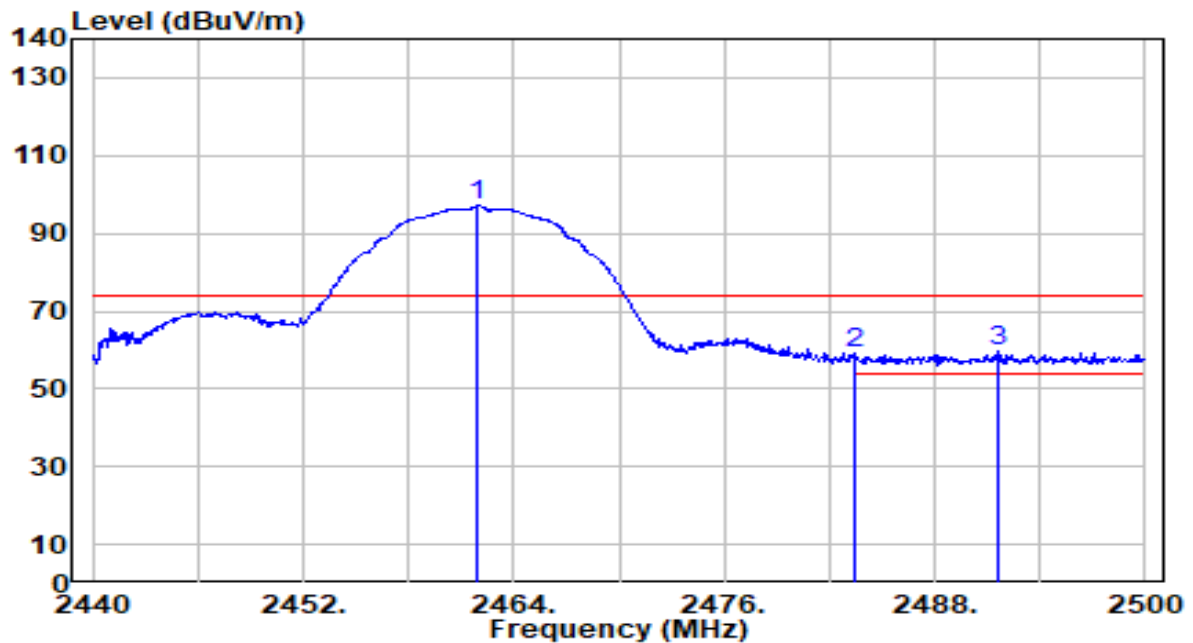


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.960	65.80	31.28	97.07	N/A	N/A	258	52	Peak
2	2483.500	27.69	31.35	59.04	-14.96	74.00	258	52	Peak
3	* 2491.660	28.06	31.38	59.44	-14.56	74.00	258	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

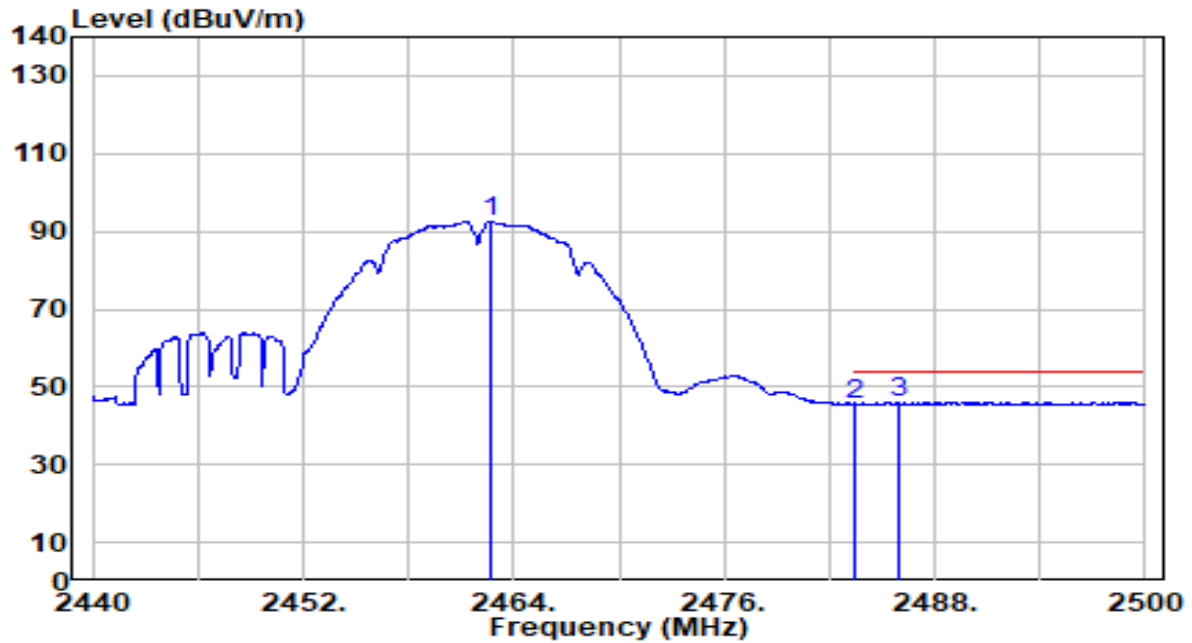


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.740	61.41	31.28	92.69	N/A	N/A	258	52	Average
2	2483.500	14.16	31.35	45.51	-8.49	54.00	258	52	Average
3	* 2485.900	14.68	31.36	46.04	-7.96	54.00	258	52	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

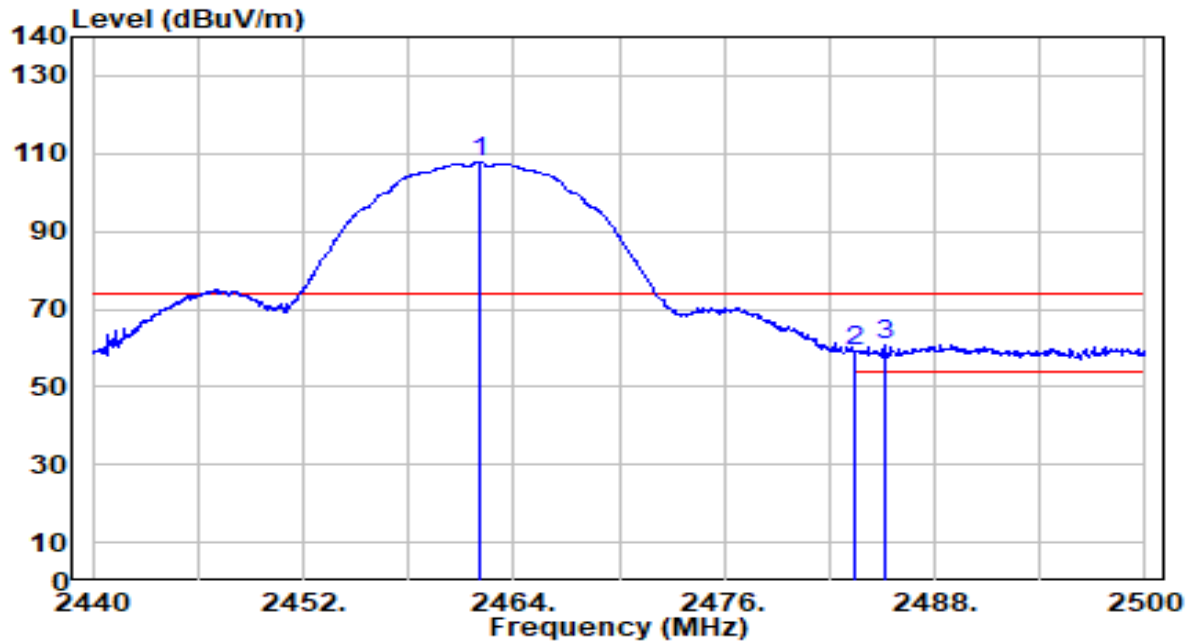


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.020	76.63	31.28	107.90	N/A	N/A	179	150	Peak
2	2483.500	27.64	31.35	58.99	-15.01	74.00	179	150	Peak
3	* 2485.120	29.35	31.36	60.70	-13.30	74.00	179	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-04
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

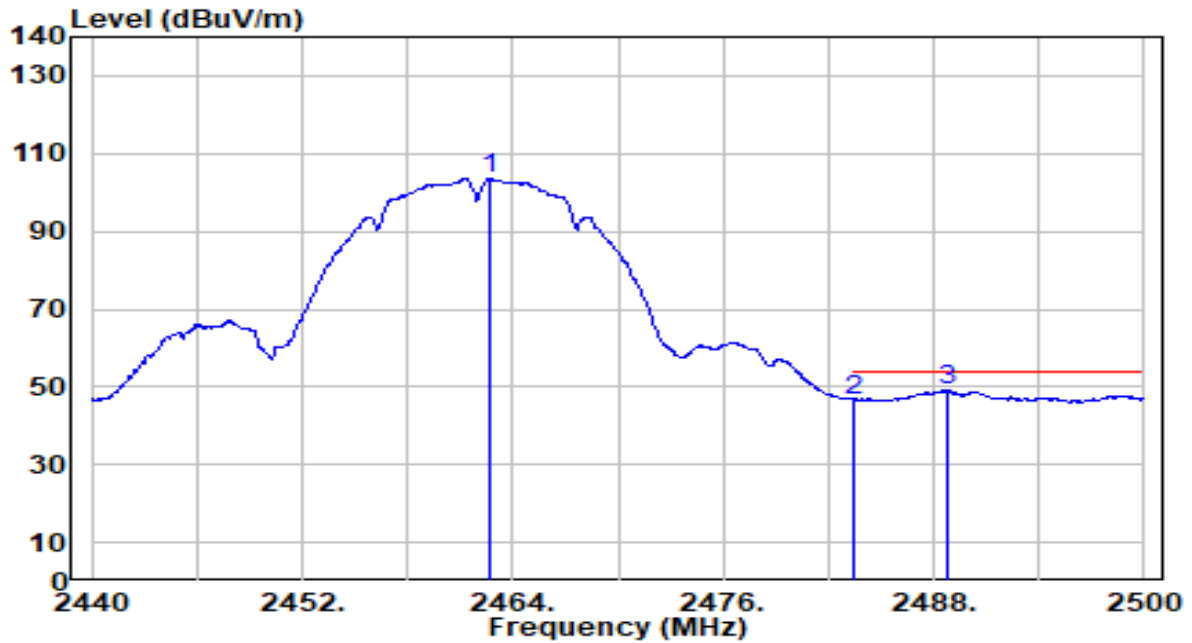


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.740	72.26	31.28	103.53	N/A	N/A	179	150	Average
2	2483.500	15.37	31.35	46.72	-7.28	54.00	179	150	Average
3	* 2488.840	17.57	31.37	48.94	-5.06	54.00	179	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

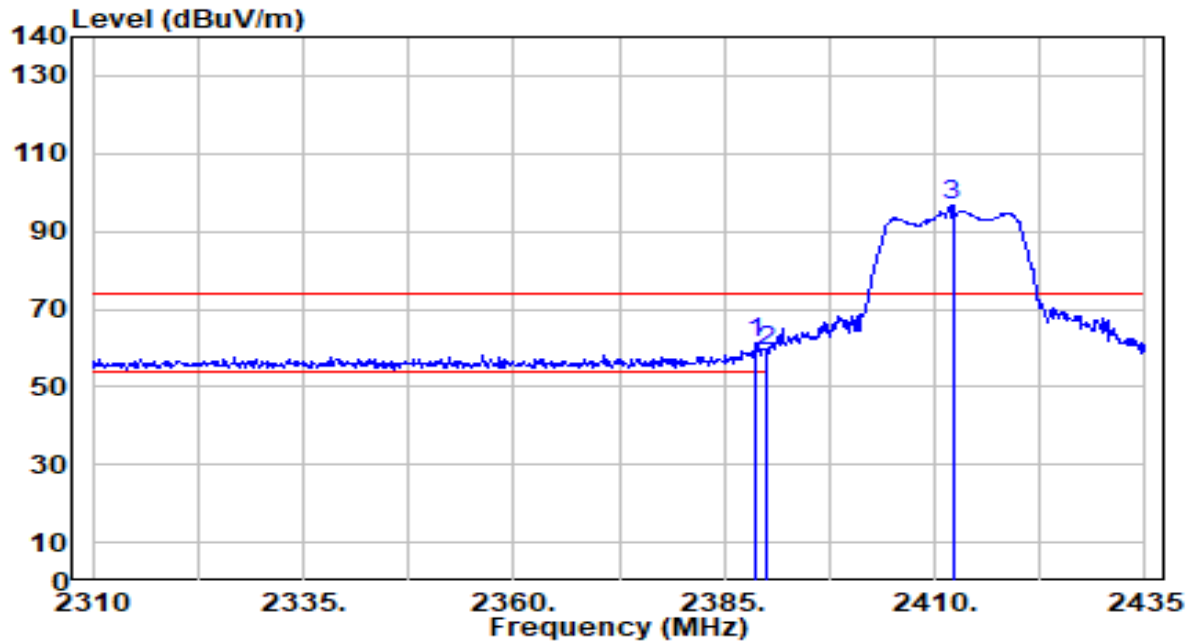


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.750	30.28	31.03	61.31	-12.69	74.00	199	331	Peak
2		2390.000	28.31	31.03	59.34	-14.66	74.00	199	331	Peak
3		2412.125	65.50	31.10	96.60	N/A	N/A	199	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

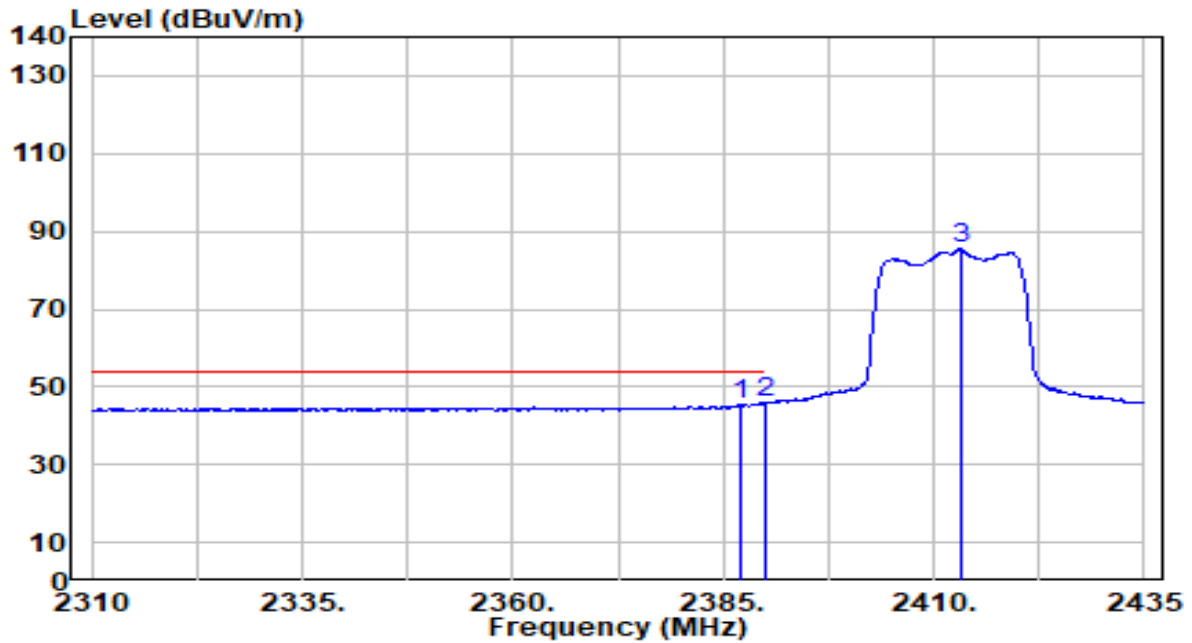


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.000	14.41	31.02	45.44	-8.56	54.00	199	331	Average
2	*	2390.000	14.74	31.03	45.77	-8.23	54.00	199	331	Average
3		2413.125	54.29	31.10	85.39	N/A	N/A	199	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

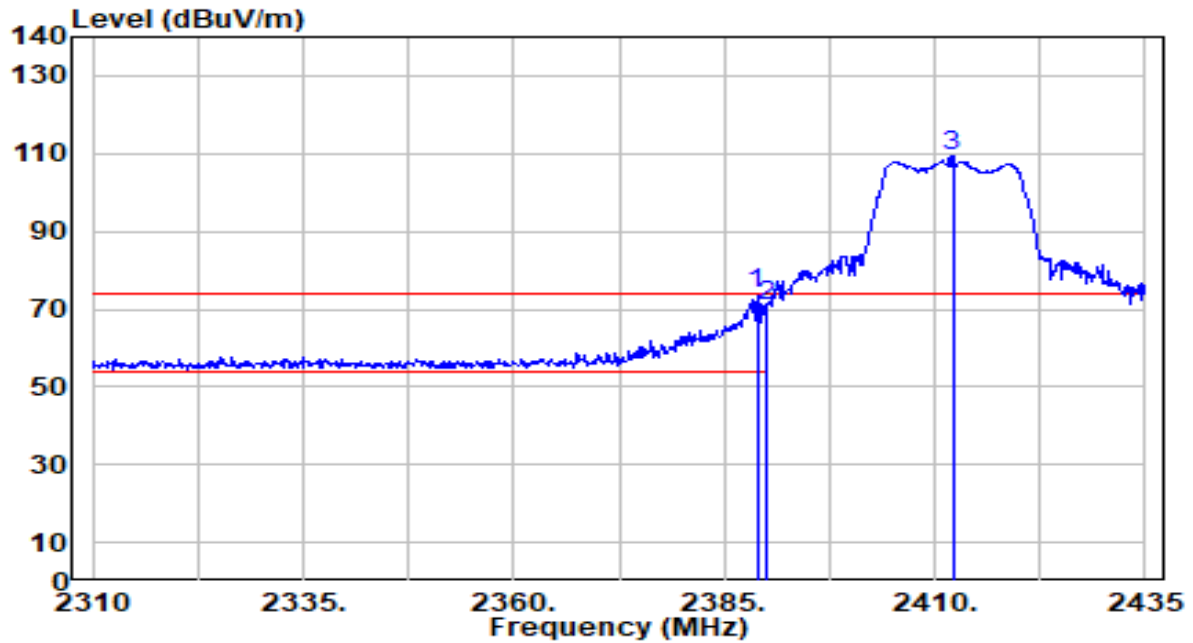


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	42.75	31.03	73.78	-0.22	74.00	171	140	Peak
2		2390.000	39.67	31.03	70.70	-3.30	74.00	171	140	Peak
3		2412.125	78.40	31.10	109.50	N/A	N/A	171	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

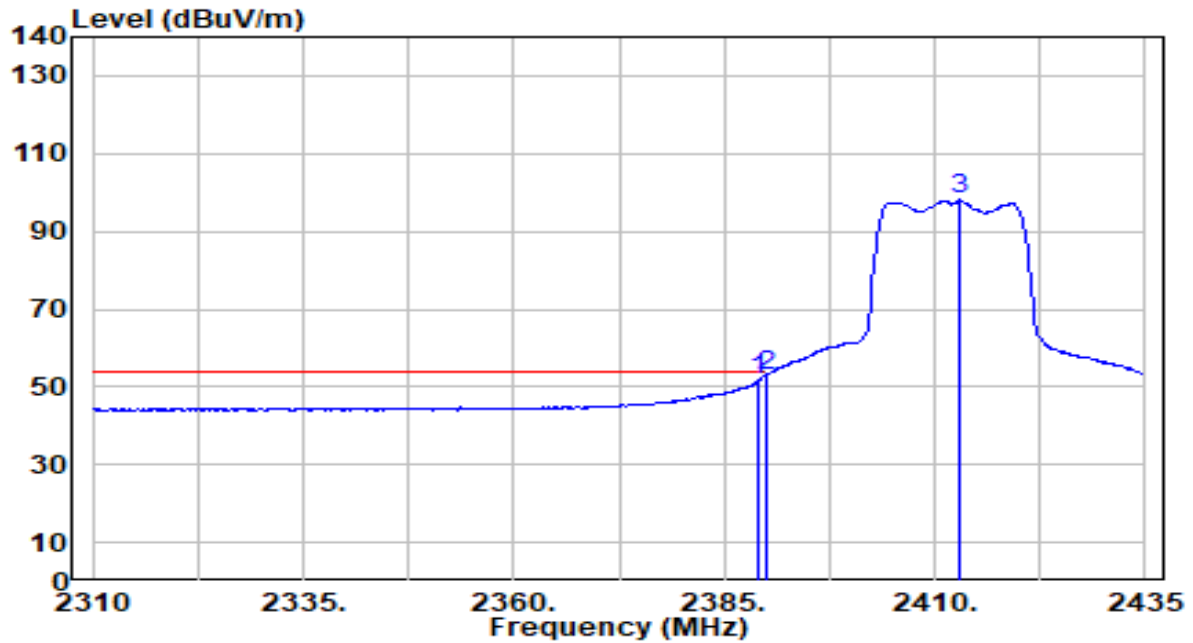


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	20.57	31.03	51.60	-2.40	54.00	171	140	Average
2	*	2390.000	22.03	31.03	53.06	-0.94	54.00	171	140	Average
3		2413.000	66.91	31.10	98.01	N/A	N/A	171	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

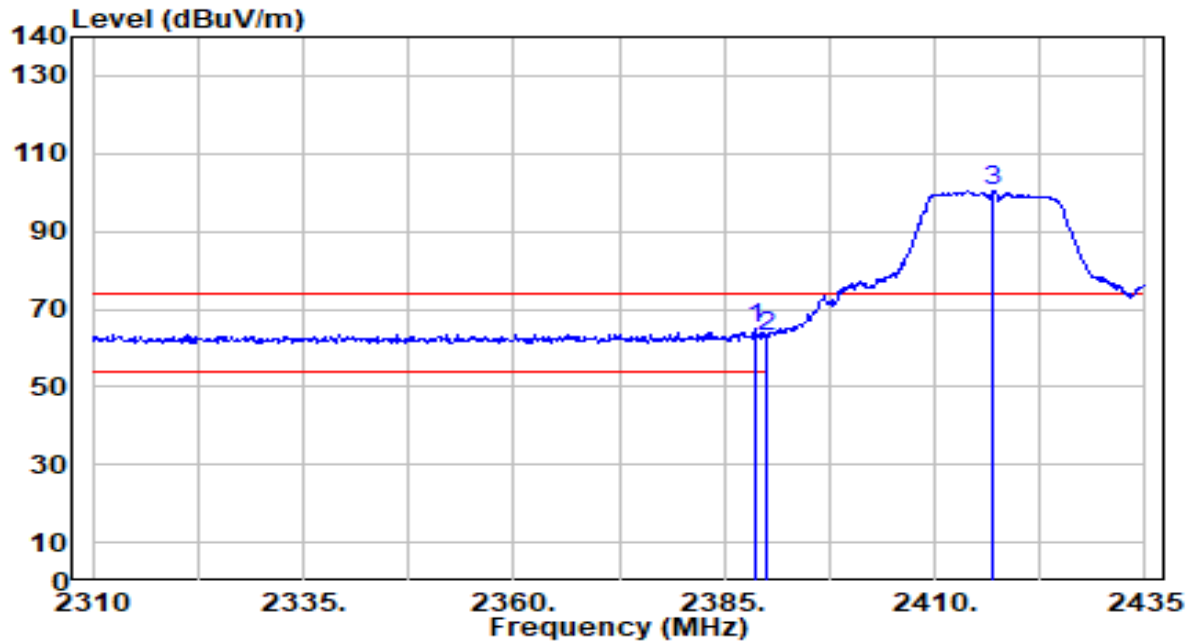


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.625	33.79	31.03	64.82	-9.18	74.00	290	36	Peak
2		2390.000	31.77	31.03	62.80	-11.20	74.00	290	36	Peak
3		2416.875	69.07	31.12	100.18	N/A	N/A	290	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

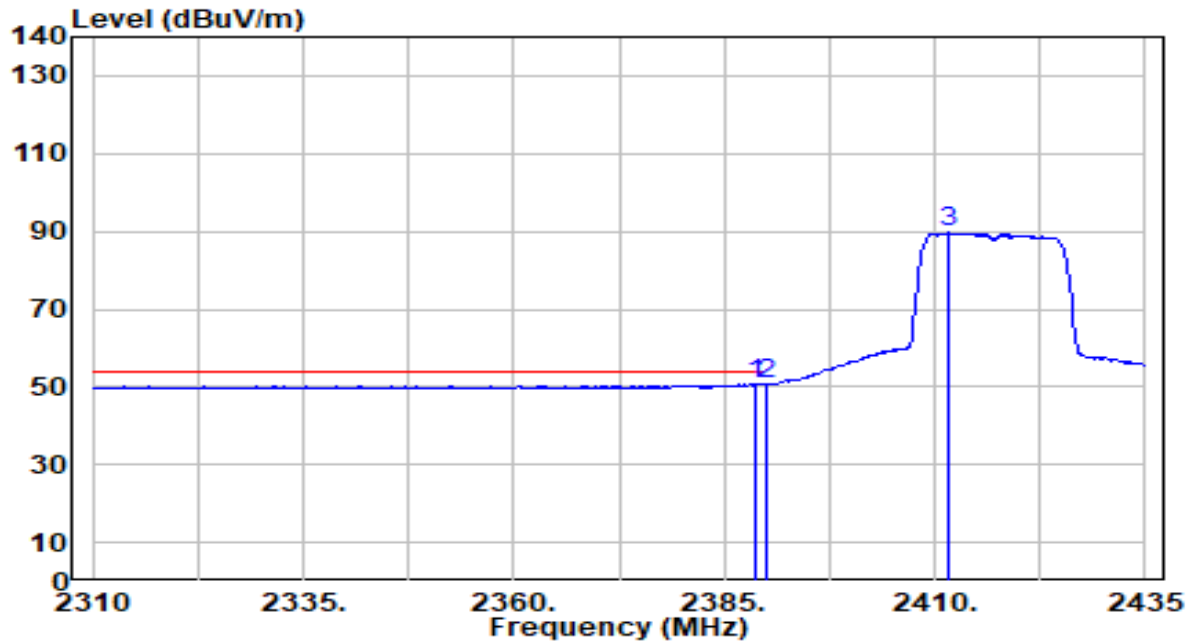


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.625	19.71	31.03	50.73	-3.27	54.00	290	36	Average
2		2390.000	19.68	31.03	50.71	-3.29	54.00	290	36	Average
3		2411.750	58.47	31.10	89.57	N/A	N/A	290	36	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

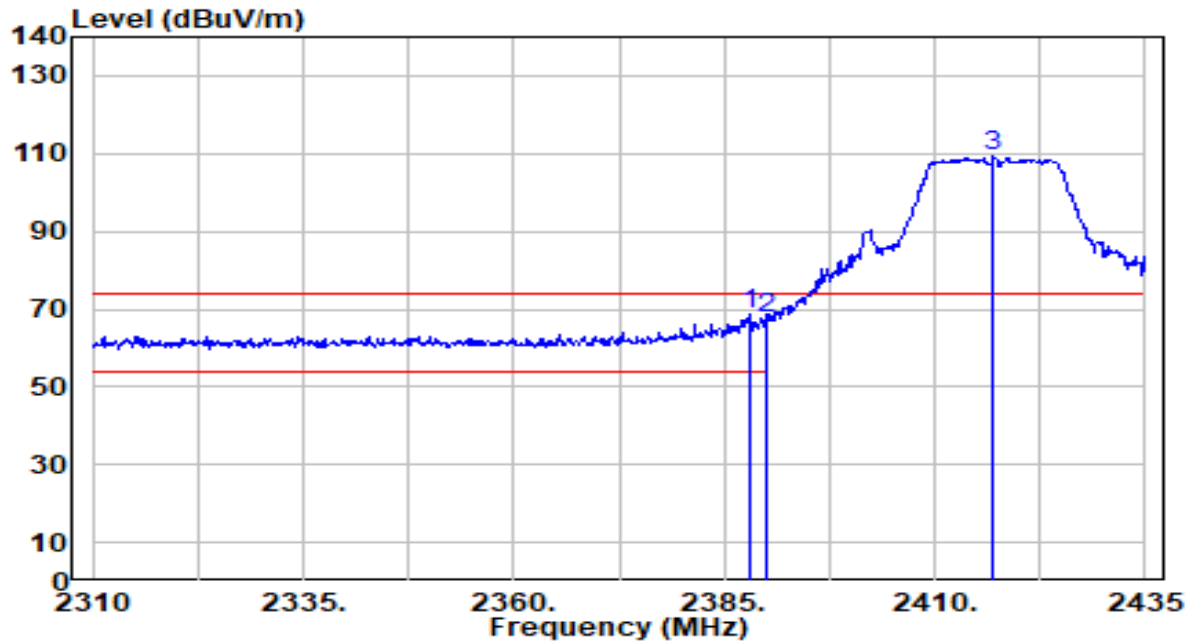


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.125	37.39	31.03	68.42	-5.58	74.00	187	158	Peak
2		2390.000	36.34	31.03	67.37	-6.63	74.00	187	158	Peak
3		2416.875	78.01	31.12	109.13	N/A	N/A	187	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

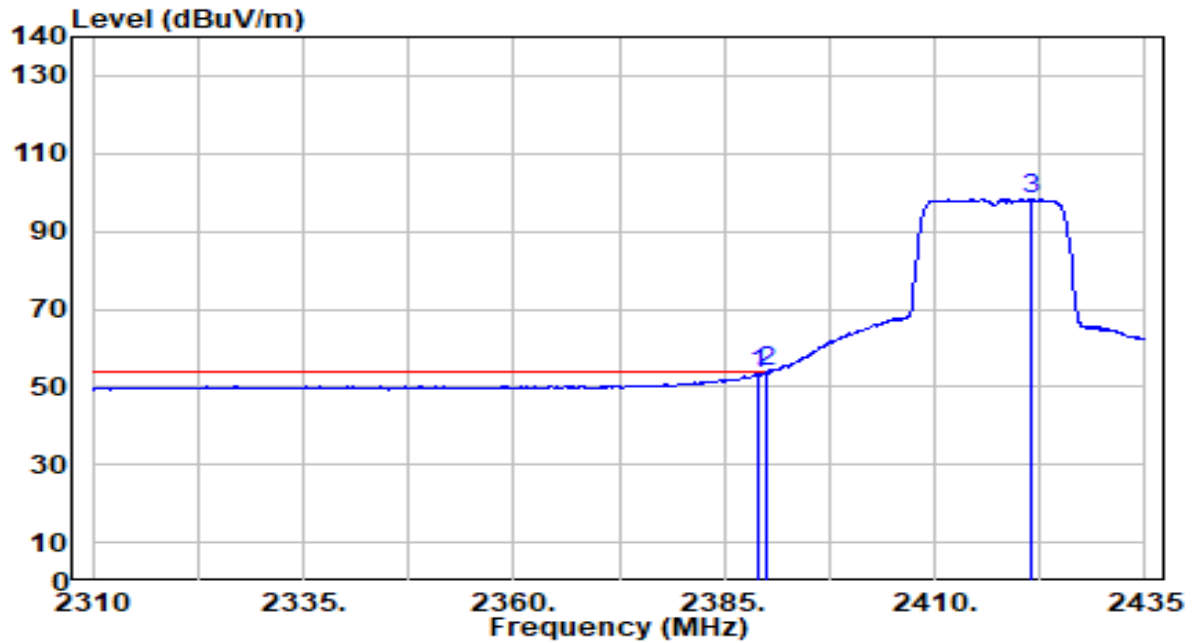


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	22.16	31.03	53.18	-0.82	54.00	187	158	Average
2	*	2390.000	22.68	31.03	53.71	-0.29	54.00	187	158	Average
3		2421.500	67.14	31.13	98.27	N/A	N/A	187	158	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

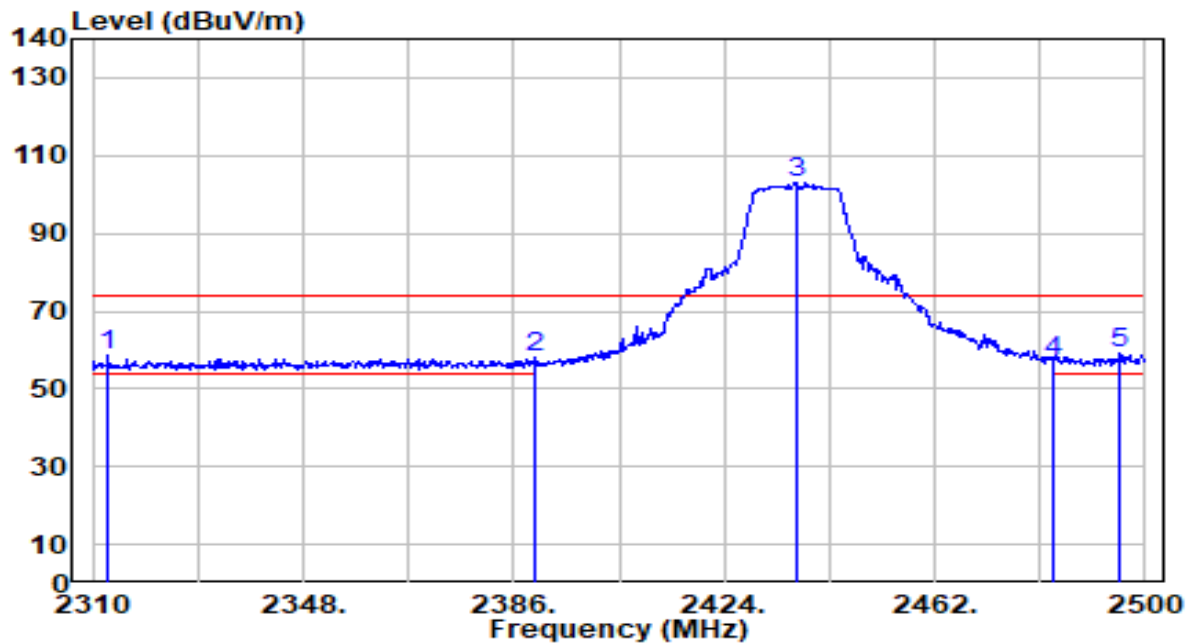


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2312.660	27.61	30.83	58.44	-15.56	74.00	288	220	Peak
2	2390.000	26.83	31.03	57.86	-16.14	74.00	288	220	Peak
3	2436.920	71.98	31.19	103.17	N/A	N/A	288	220	Peak
4	2483.500	25.76	31.35	57.11	-16.89	74.00	288	220	Peak
5	* 2495.440	27.72	31.39	59.11	-14.89	74.00	288	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

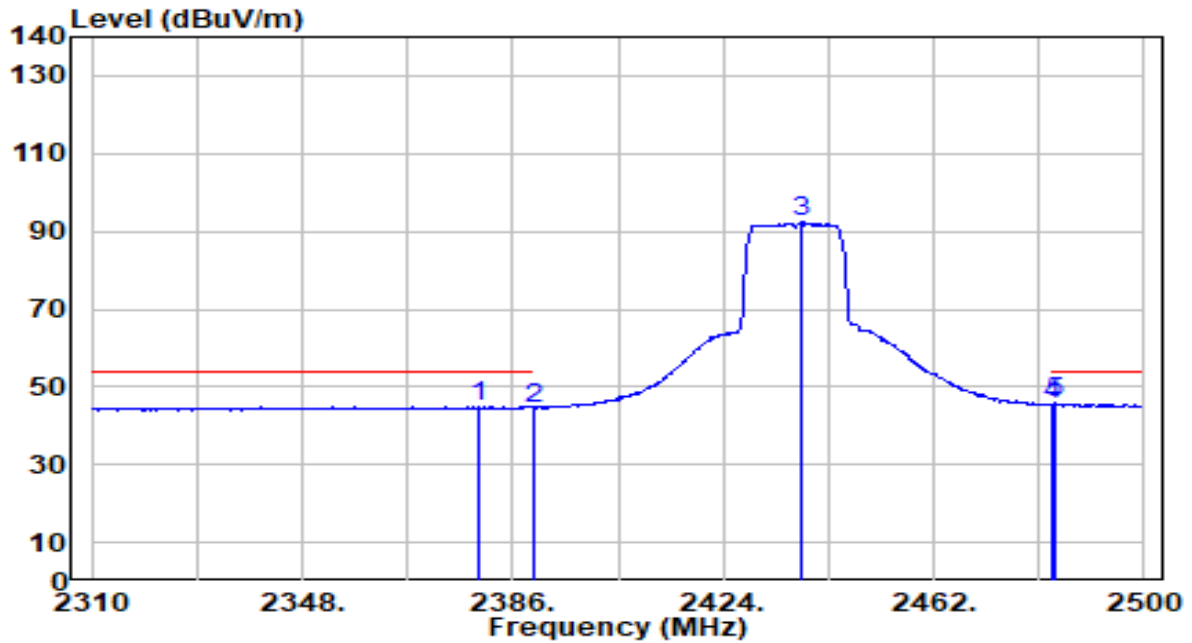


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2379.920	13.87	31.01	44.88	-9.12	54.00	288	220	Average
2	2390.000	13.58	31.03	44.61	-9.39	54.00	288	220	Average
3	2438.250	61.41	31.19	92.60	N/A	N/A	288	220	Average
4	2483.500	14.05	31.35	45.40	-8.60	54.00	288	220	Average
5	* 2484.040	14.35	31.35	45.71	-8.29	54.00	288	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

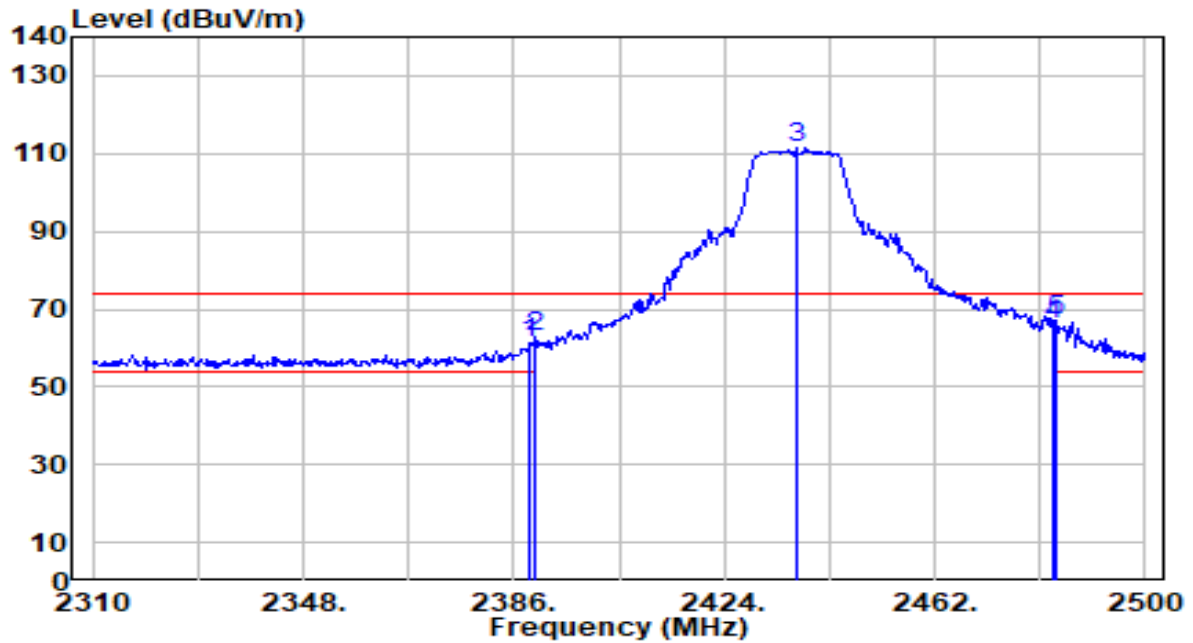


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	30.26	31.03	61.29	-12.71	74.00	182	148	Peak
2	2390.000	31.82	31.03	62.85	-11.15	74.00	182	148	Peak
3	2437.110	80.24	31.19	111.43	N/A	N/A	182	148	Peak
4	2483.500	34.92	31.35	66.27	-7.73	74.00	182	148	Peak
5	* 2484.040	35.54	31.35	66.89	-7.11	74.00	182	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

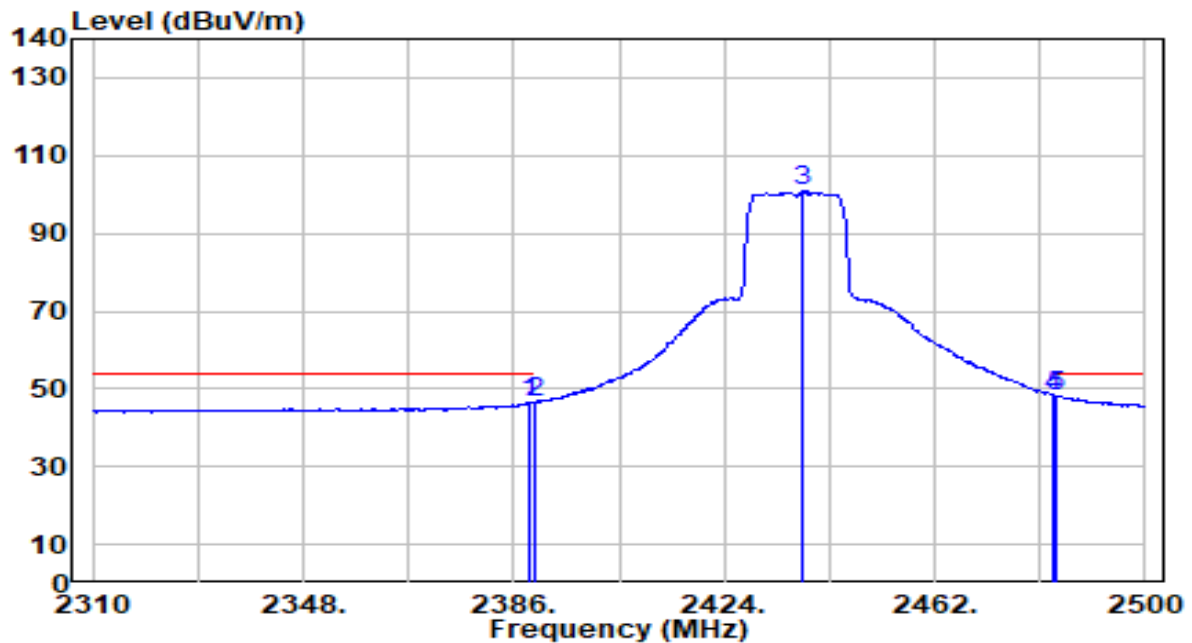


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	15.57	31.03	46.60	-7.40	54.00	182	148	Average
2	2390.000	15.68	31.03	46.71	-7.29	54.00	182	148	Average
3	2438.060	69.82	31.19	101.01	N/A	N/A	182	148	Average
4	* 2483.500	16.96	31.35	48.31	-5.69	54.00	182	148	Average
5	2484.040	16.95	31.35	48.30	-5.70	54.00	182	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 9_Ant 0	Test Voltage	AC 120V/60Hz

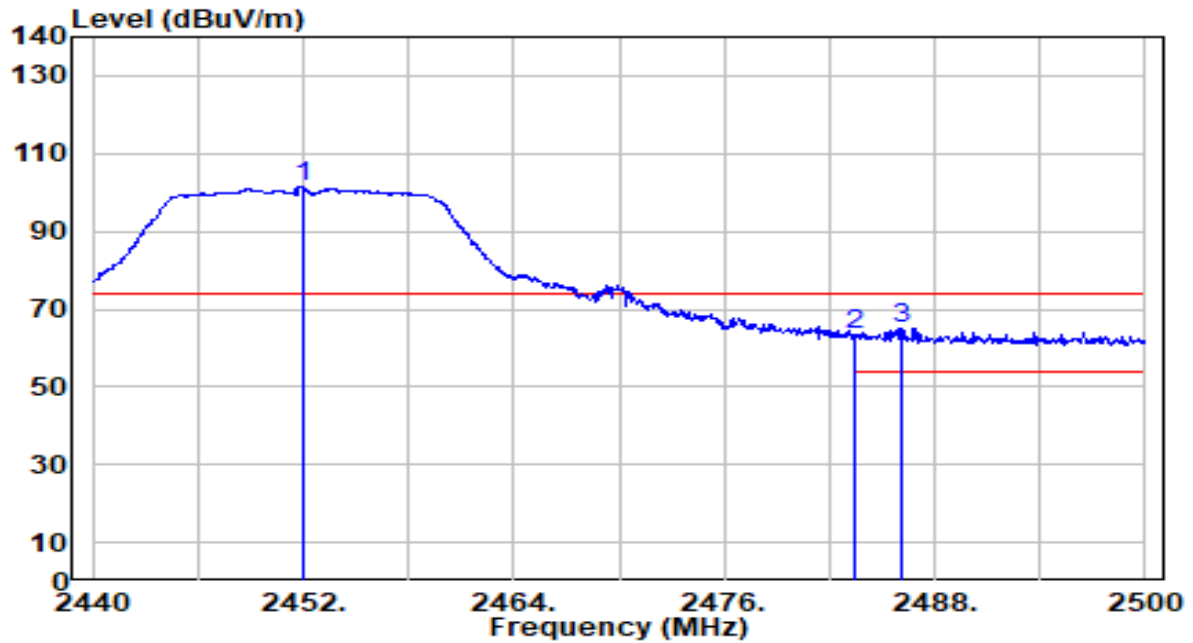

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.940	70.16	31.24	101.40	N/A	N/A	212	43	Peak
2	2483.500	31.99	31.35	63.34	-10.66	74.00	212	43	Peak
3	* 2486.080	33.81	31.36	65.17	-8.83	74.00	212	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.