


EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 9_Ant 0	Test Voltage	AC 120V/60Hz

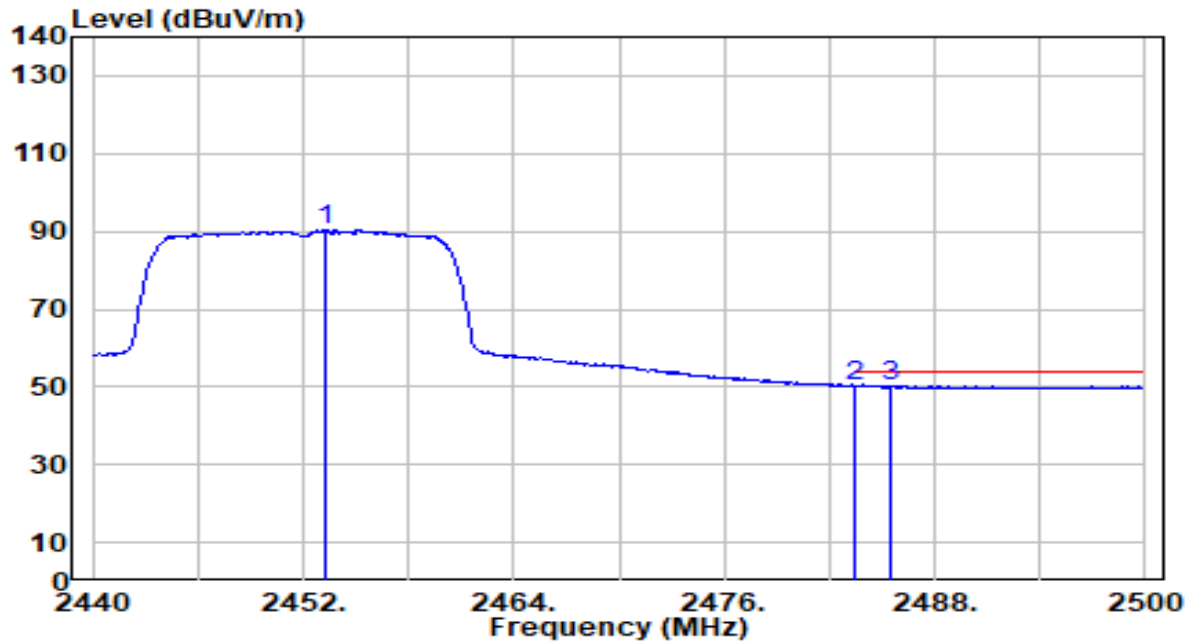


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.200	59.16	31.24	90.40	N/A	N/A	212	43	Average
2	2483.500	18.80	31.35	50.15	-3.85	54.00	212	43	Average
3	* 2485.480	18.94	31.36	50.30	-3.70	54.00	212	43	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 9_Ant 0	Test Voltage	AC 120V/60Hz

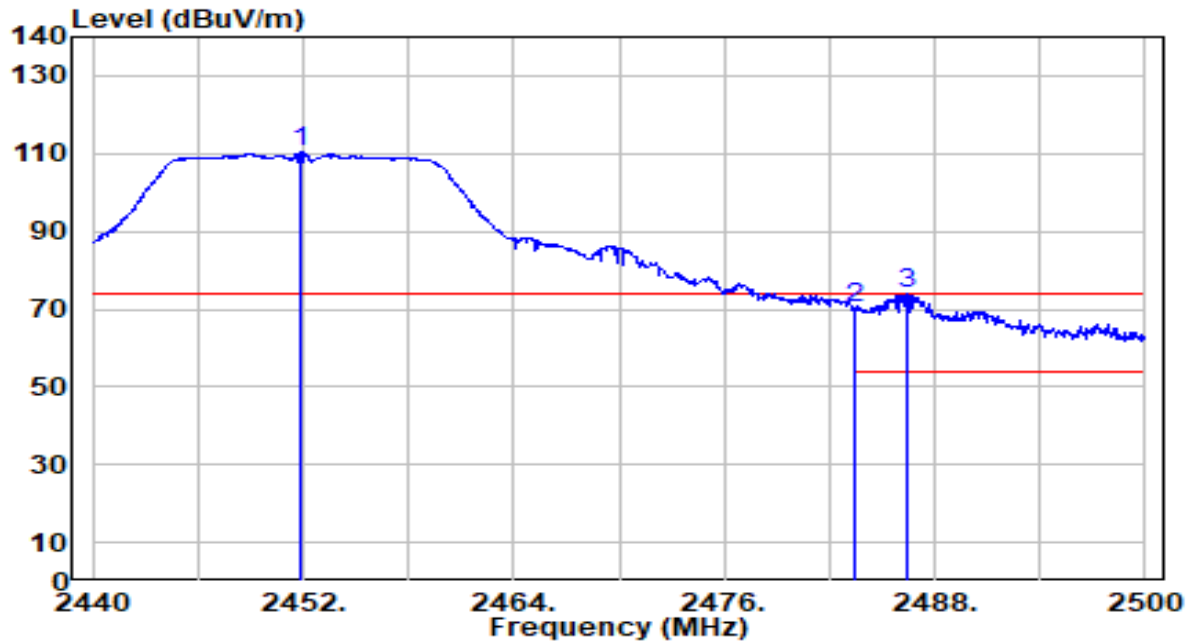


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.880	78.96	31.24	110.20	N/A	N/A	209	157	Peak
2	2483.500	39.10	31.35	70.45	-3.55	74.00	209	157	Peak
3	* 2486.440	42.41	31.36	73.77	-0.23	74.00	209	157	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 9_Ant 0	Test Voltage	AC 120V/60Hz

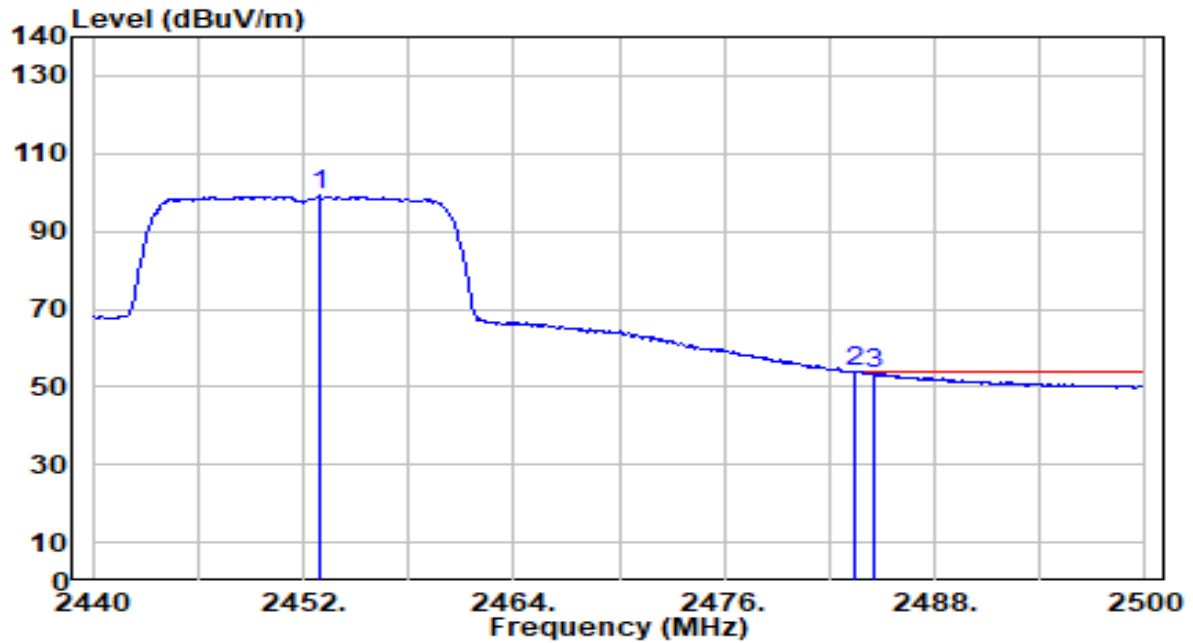


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2452.960	67.92	31.24	99.16	N/A	N/A	209	157	Average
2	*	2483.500	22.50	31.35	53.85	-0.15	54.00	209	157	Average
3		2484.580	22.09	31.36	53.44	-0.56	54.00	209	157	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 10_Ant 0	Test Voltage	AC 120V/60Hz

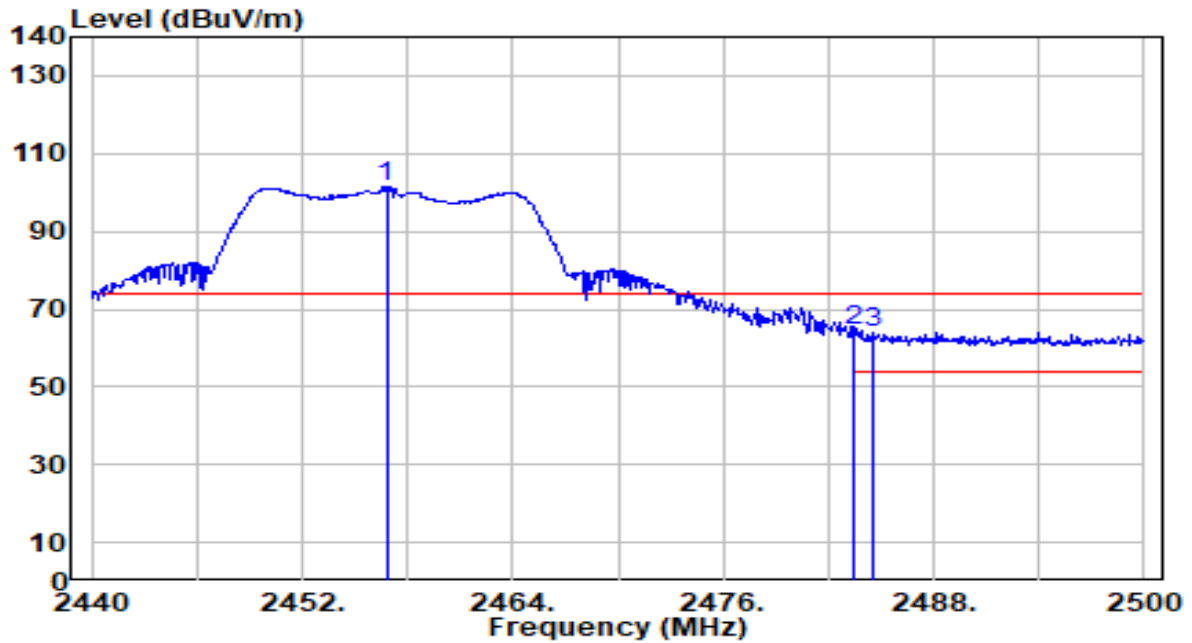


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.800	70.42	31.26	101.68	N/A	N/A	234	24	Peak
2	*	2483.500	32.87	31.35	64.22	-9.78	74.00	234	24	Peak
3		2484.520	32.63	31.36	63.99	-10.01	74.00	234	24	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 10_Ant 0	Test Voltage	AC 120V/60Hz

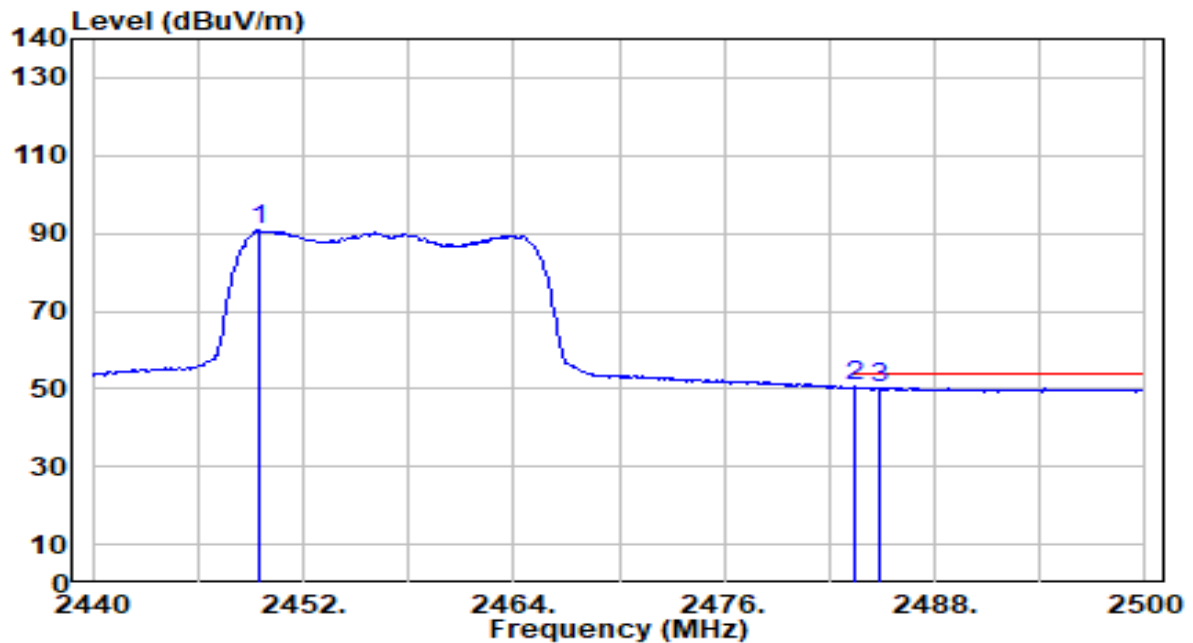


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2449.420	59.43	31.23	90.66	N/A	N/A	234	24	Average
2	*	2483.500	19.10	31.35	50.45	-3.55	54.00	234	24	Average
3		2484.820	18.90	31.36	50.25	-3.75	54.00	234	24	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 10_Ant 0	Test Voltage	AC 120V/60Hz

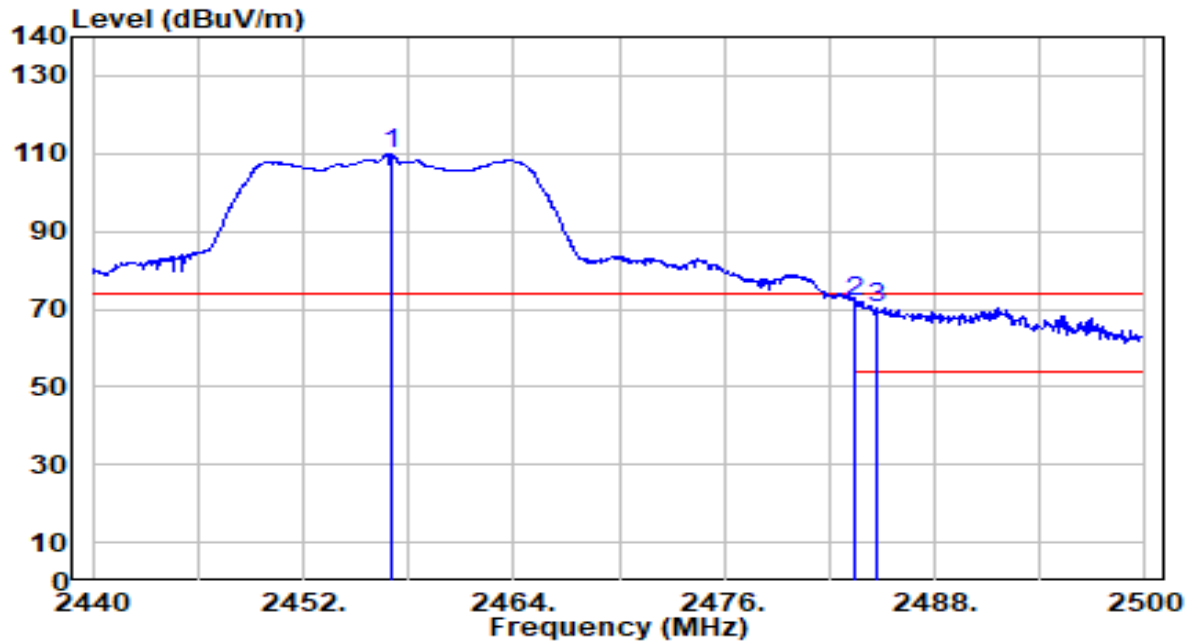


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.980	78.47	31.26	109.73	N/A	N/A	201	112	Peak
2	*	2483.500	40.38	31.35	71.73	-2.27	74.00	201	112	Peak
3		2484.700	38.88	31.36	70.23	-3.77	74.00	201	112	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 10_Ant 0	Test Voltage	AC 120V/60Hz

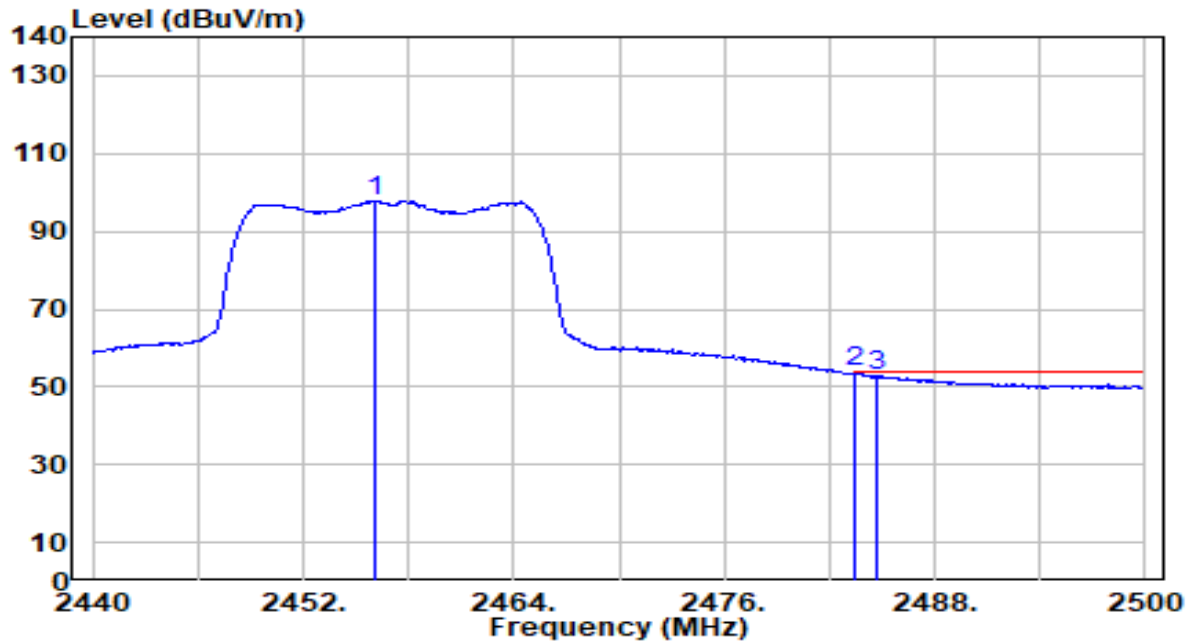


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.020	66.65	31.25	97.91	N/A	N/A	201	112	Average
2	*	2483.500	22.41	31.35	53.77	-0.23	54.00	201	112	Average
3		2484.640	21.61	31.36	52.96	-1.04	54.00	201	112	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

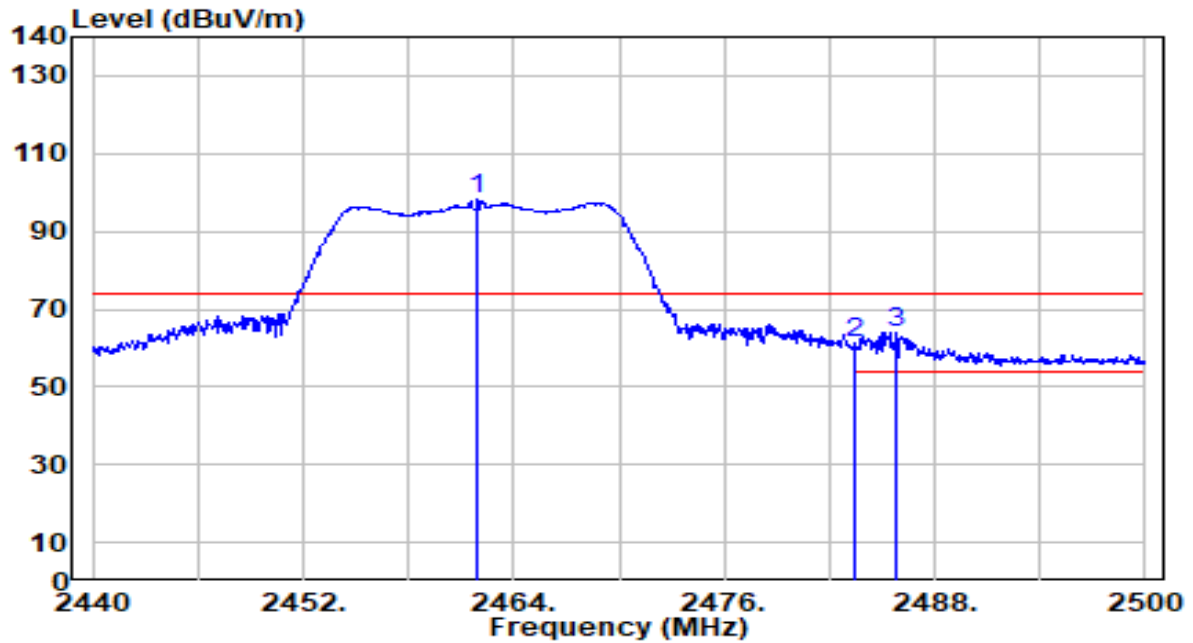


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.960	67.05	31.28	98.33	N/A	N/A	284	51	Peak
2	2483.500	29.82	31.35	61.17	-12.83	74.00	284	51	Peak
3	* 2485.840	32.74	31.36	64.10	-9.90	74.00	284	51	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

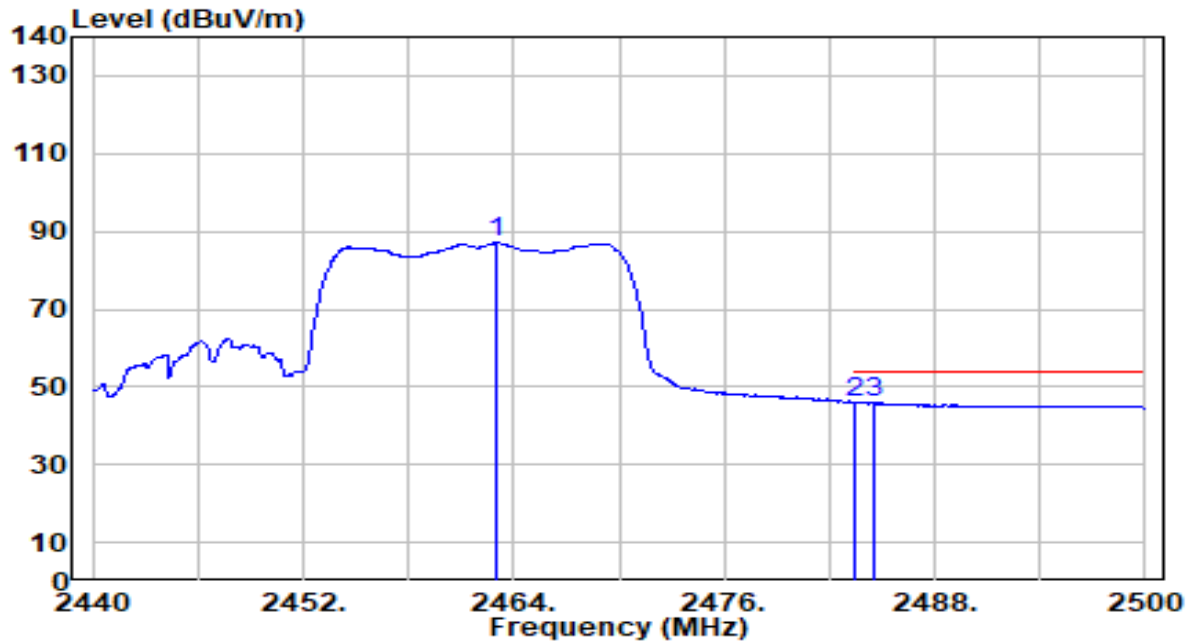


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.040	55.76	31.28	87.04	N/A	N/A	284	51	Average
2	*	2483.500	14.72	31.35	46.07	-7.93	54.00	284	51	Average
3		2484.520	14.47	31.36	45.82	-8.18	54.00	284	51	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

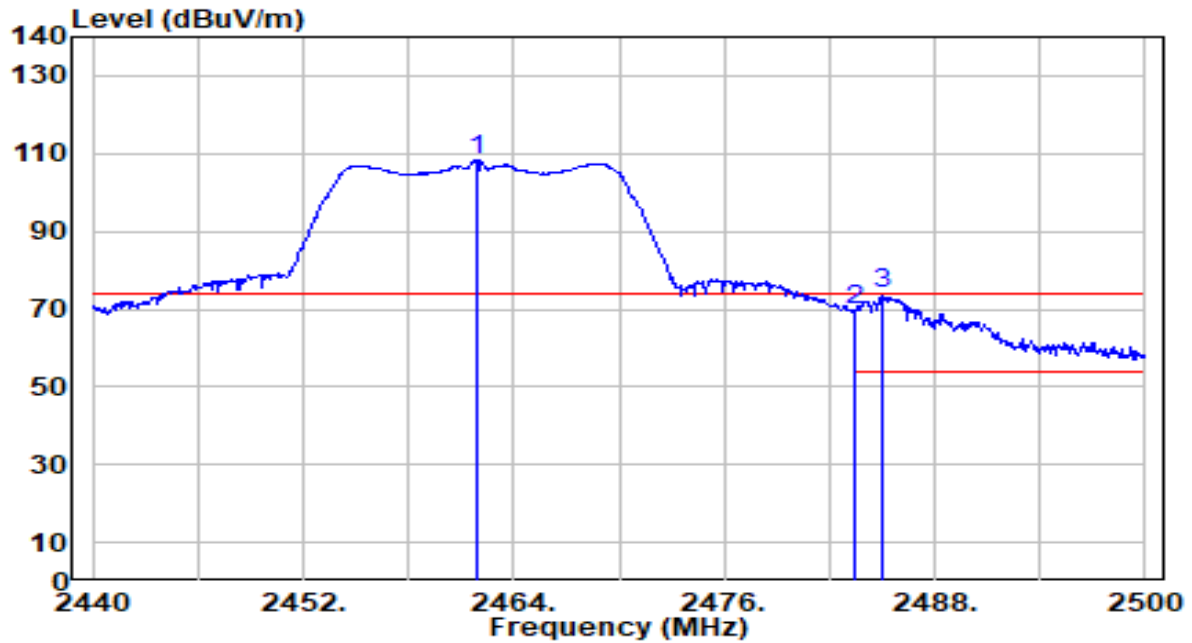


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.900	76.89	31.28	108.16	N/A	N/A	198	152	Peak
2	2483.500	38.29	31.35	69.64	-4.36	74.00	198	152	Peak
3	* 2484.940	42.40	31.36	73.75	-0.25	74.00	198	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

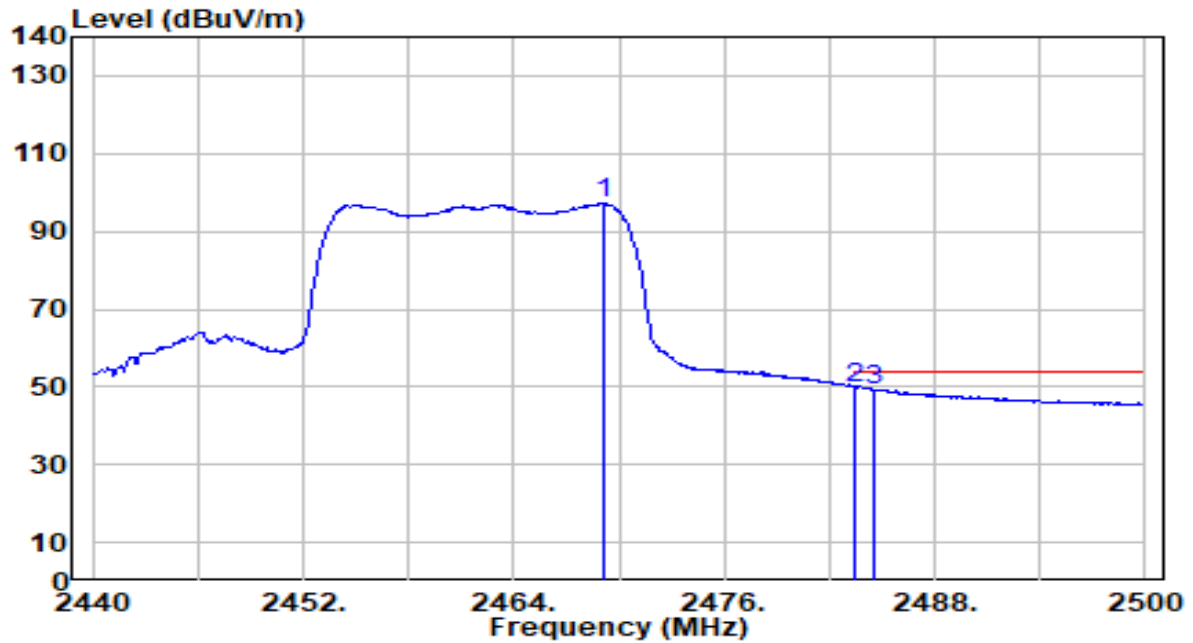


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2469.160	65.76	31.30	97.06	N/A	N/A	198	152	Average
2	*	2483.500	18.50	31.35	49.85	-4.15	54.00	198	152	Average
3		2484.520	17.98	31.36	49.34	-4.66	54.00	198	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

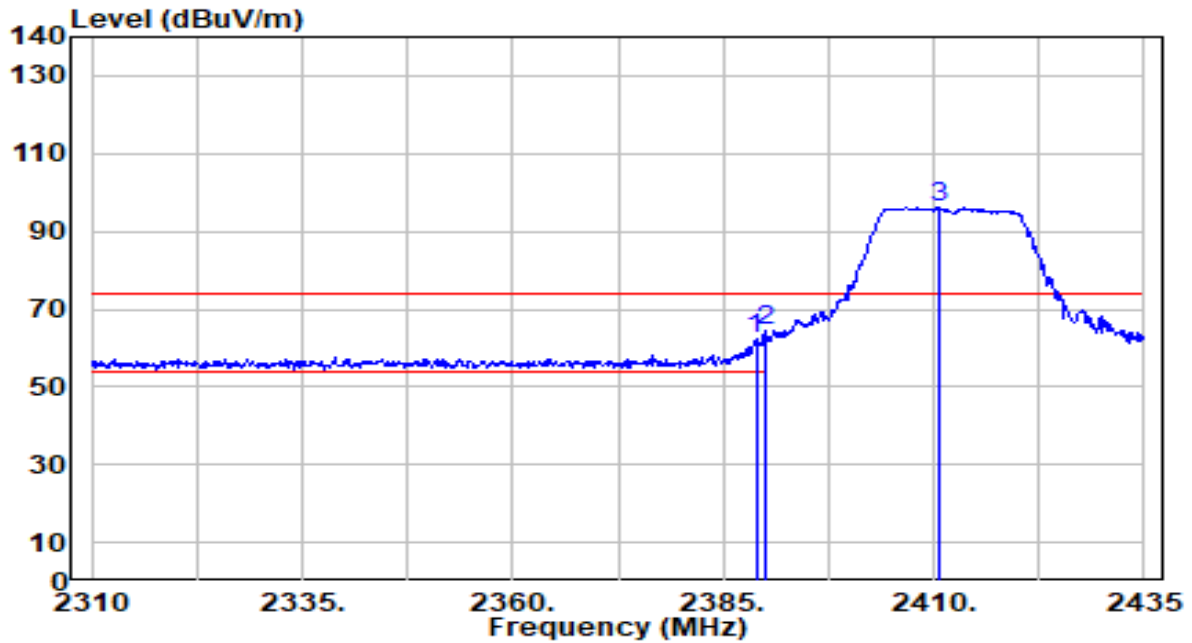


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	31.39	31.03	62.42	-11.58	74.00	270	360	Peak
2	* 2390.000	33.21	31.03	64.24	-9.76	74.00	270	360	Peak
3	2410.500	65.13	31.09	96.22	N/A	N/A	270	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

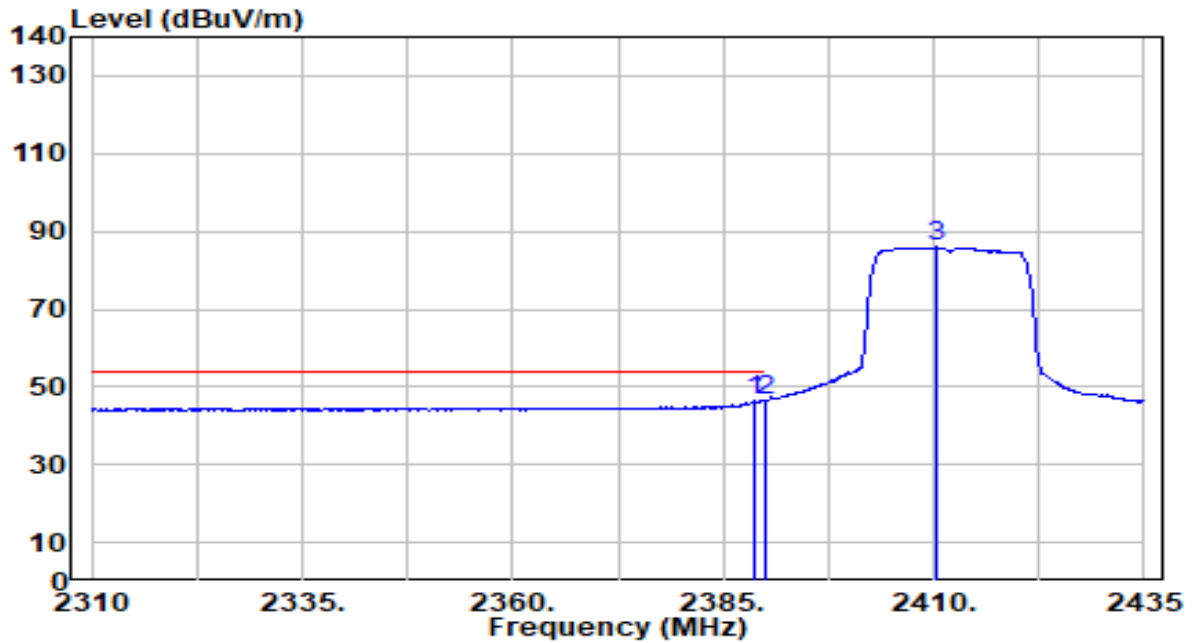


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.750	15.20	31.03	46.23	-7.77	54.00	270	360	Average
2	*	2390.000	15.55	31.03	46.59	-7.41	54.00	270	360	Average
3		2410.250	54.76	31.09	85.85	N/A	N/A	270	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

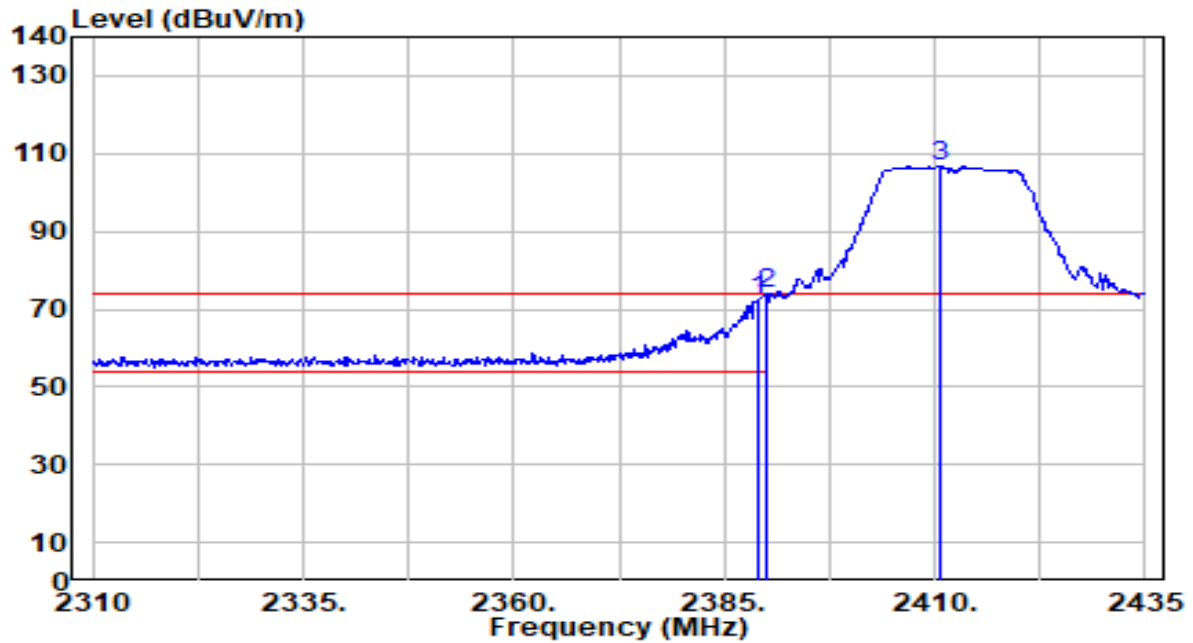


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	41.10	31.03	72.13	-1.87	74.00	170	142	Peak
2	*	2390.000	42.69	31.03	73.73	-0.27	74.00	170	142	Peak
3		2410.750	75.82	31.09	106.91	N/A	N/A	170	142	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0	Test Voltage	AC 120V/60Hz

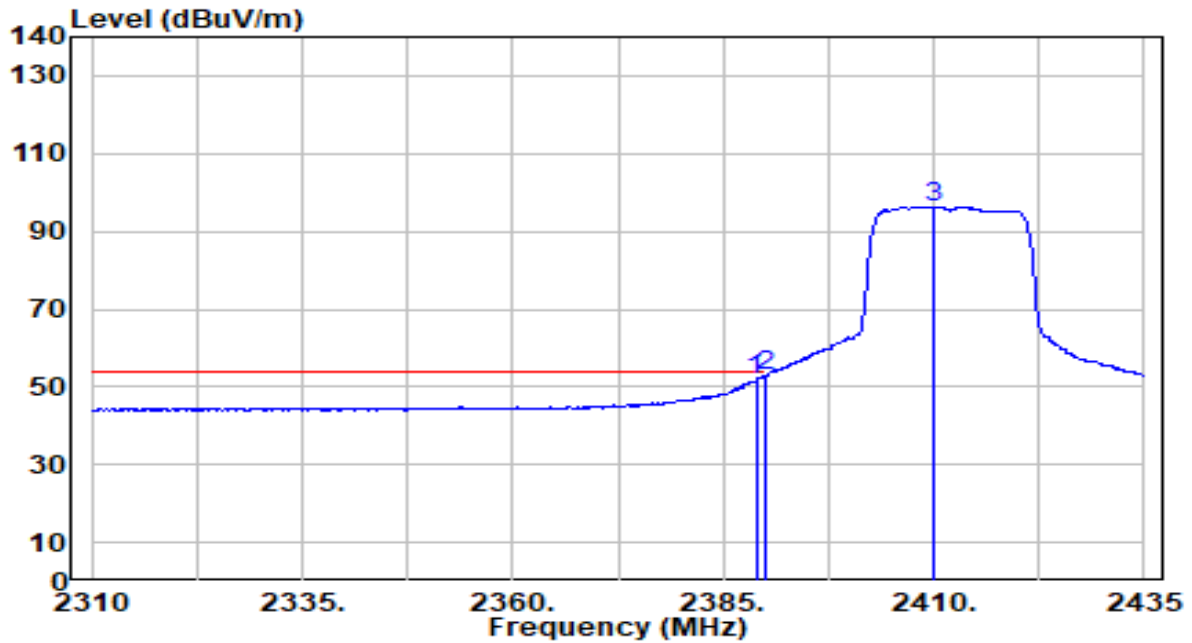


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	20.94	31.03	51.97	-2.03	54.00	170	142	Average
2	*	2390.000	21.88	31.03	52.91	-1.09	54.00	170	142	Average
3		2410.125	65.31	31.09	96.41	N/A	N/A	170	142	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

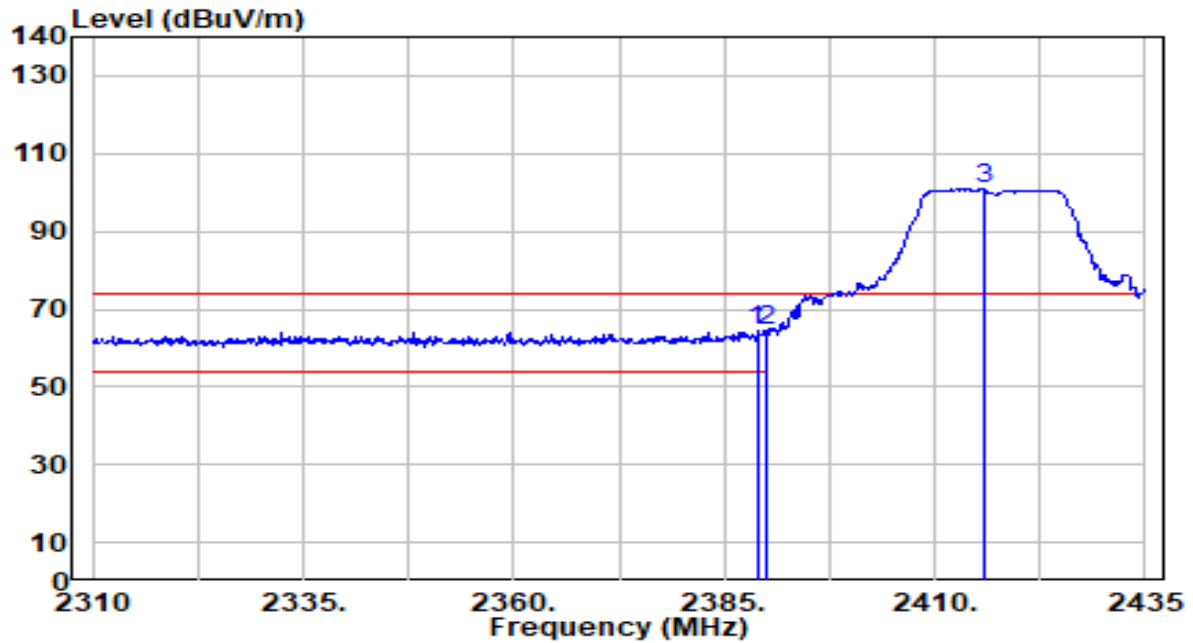


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	33.54	31.03	64.57	-9.43	74.00	259	25	Peak
2		2390.000	33.51	31.03	64.55	-9.45	74.00	259	25	Peak
3		2415.750	69.94	31.11	101.06	N/A	N/A	259	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

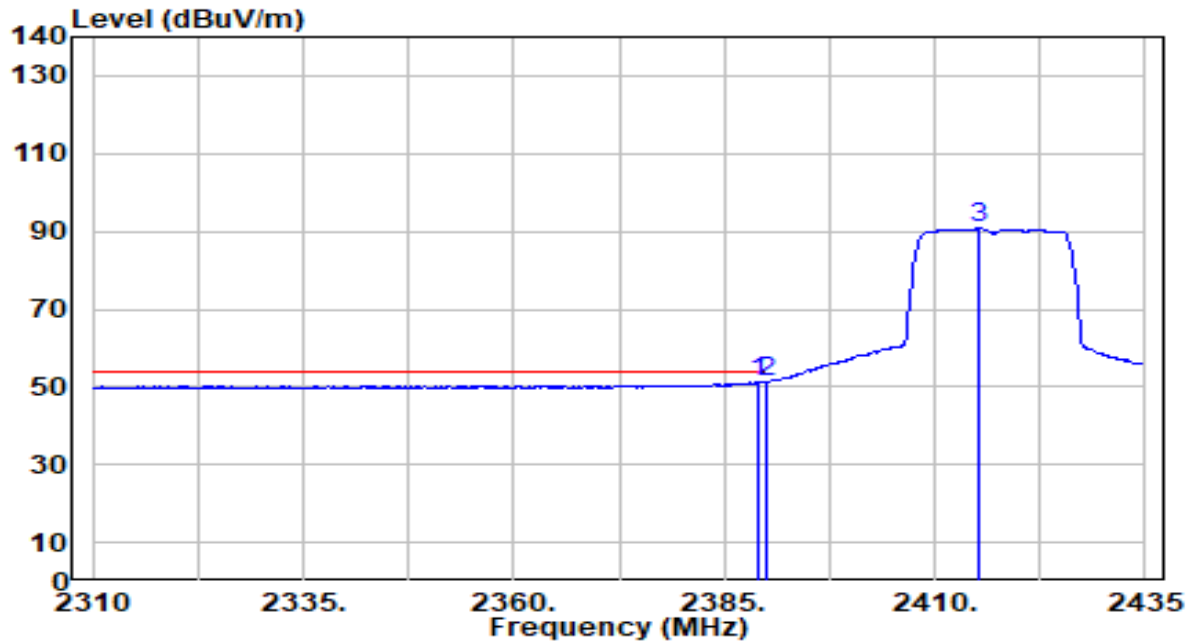


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	20.01	31.03	51.04	-2.96	54.00	259	25	Average
2	*	2390.000	20.24	31.03	51.27	-2.73	54.00	259	25	Average
3		2415.125	59.55	31.11	90.66	N/A	N/A	259	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

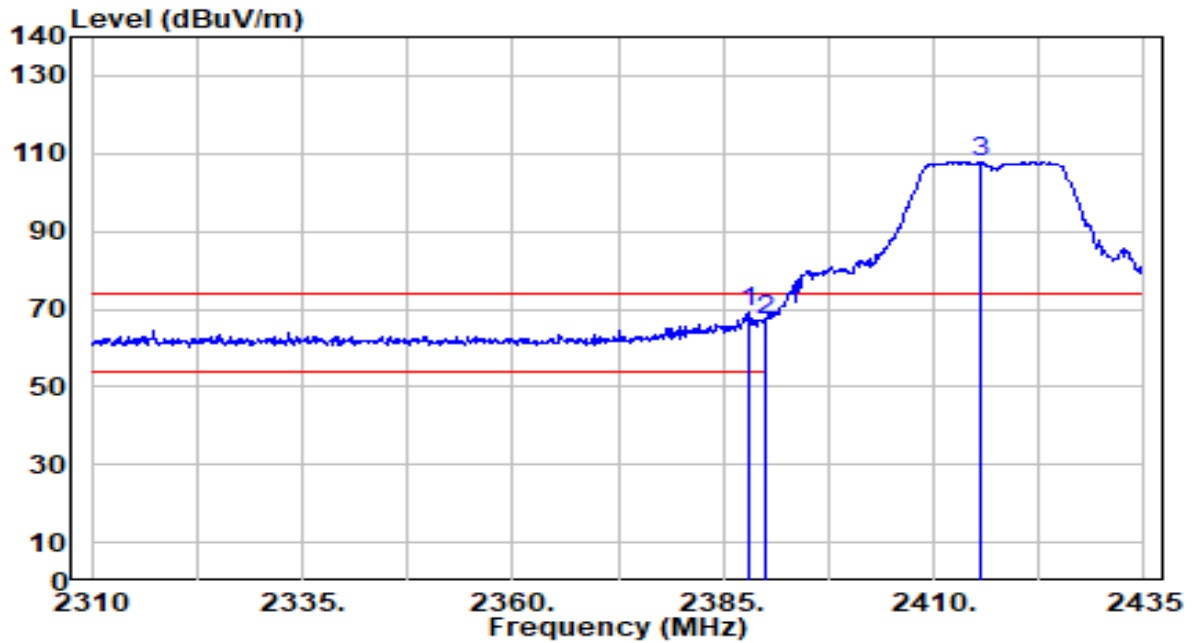


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	38.19	31.03	69.22	-4.78	74.00	166	138	Peak
2		2390.000	36.24	31.03	67.27	-6.73	74.00	166	138	Peak
3		2415.625	76.71	31.11	107.82	N/A	N/A	166	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 2_Ant 0	Test Voltage	AC 120V/60Hz

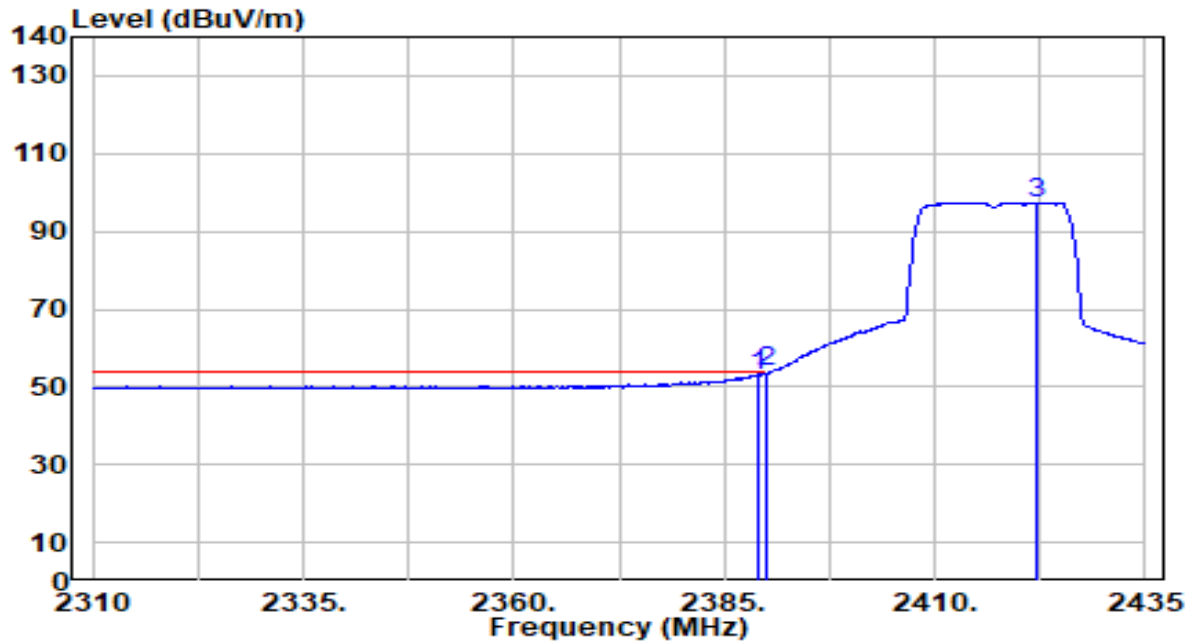


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	22.02	31.03	53.05	-0.95	54.00	166	138	Average
2	*	2390.000	22.76	31.03	53.79	-0.21	54.00	166	138	Average
3		2422.125	66.31	31.13	97.44	N/A	N/A	166	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 3_Ant 0	Test Voltage	AC 120V/60Hz

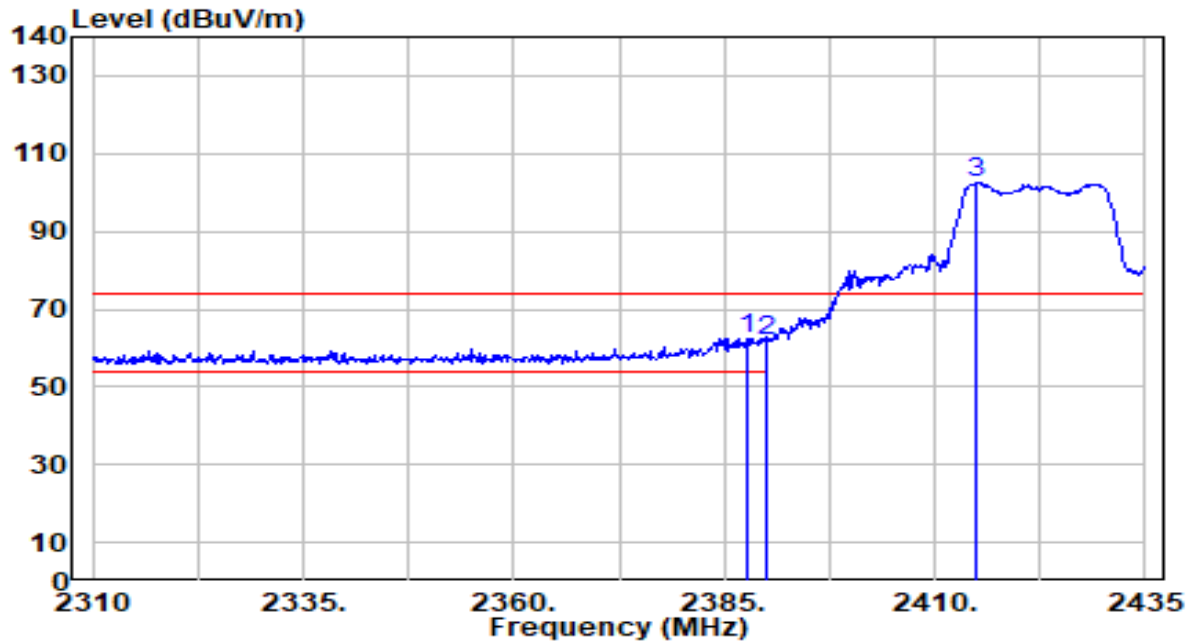


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.875	31.50	31.03	62.52	-11.48	74.00	261	51	Peak
2		2390.000	30.75	31.03	61.78	-12.22	74.00	261	51	Peak
3		2415.000	71.44	31.11	102.55	N/A	N/A	261	51	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 3_Ant 0	Test Voltage	AC 120V/60Hz

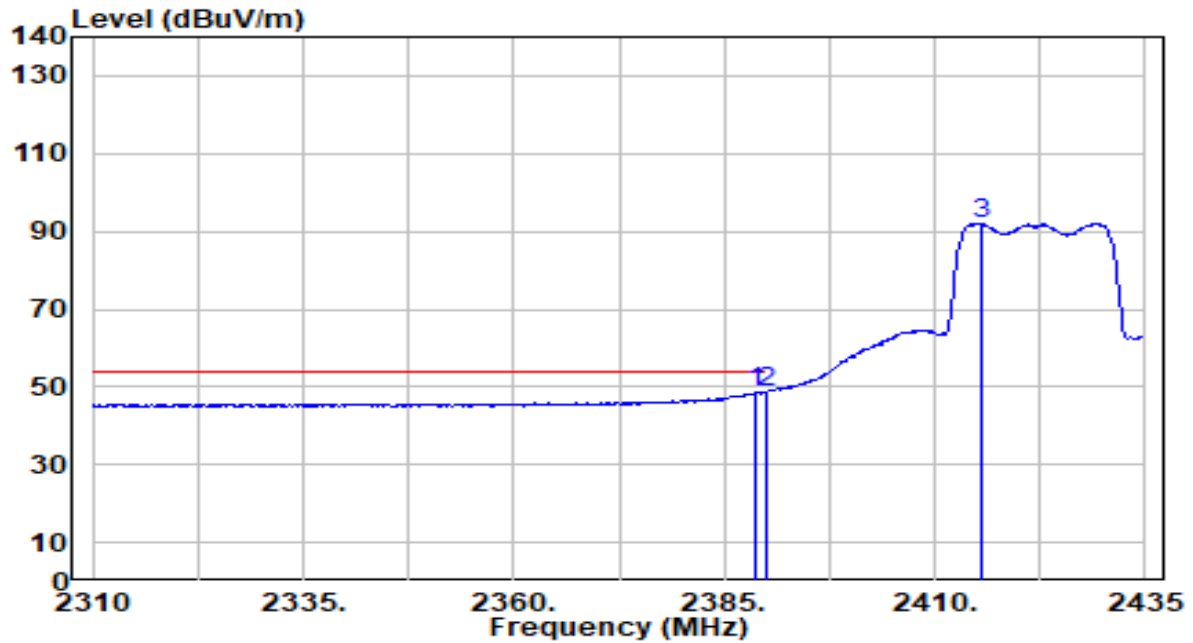


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.750	17.65	31.03	48.67	-5.33	54.00	261	51	Average
2		2390.000	17.58	31.03	48.61	-5.39	54.00	261	51	Average
3		2415.500	60.98	31.11	92.09	N/A	N/A	261	51	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 3_Ant 0	Test Voltage	AC 120V/60Hz

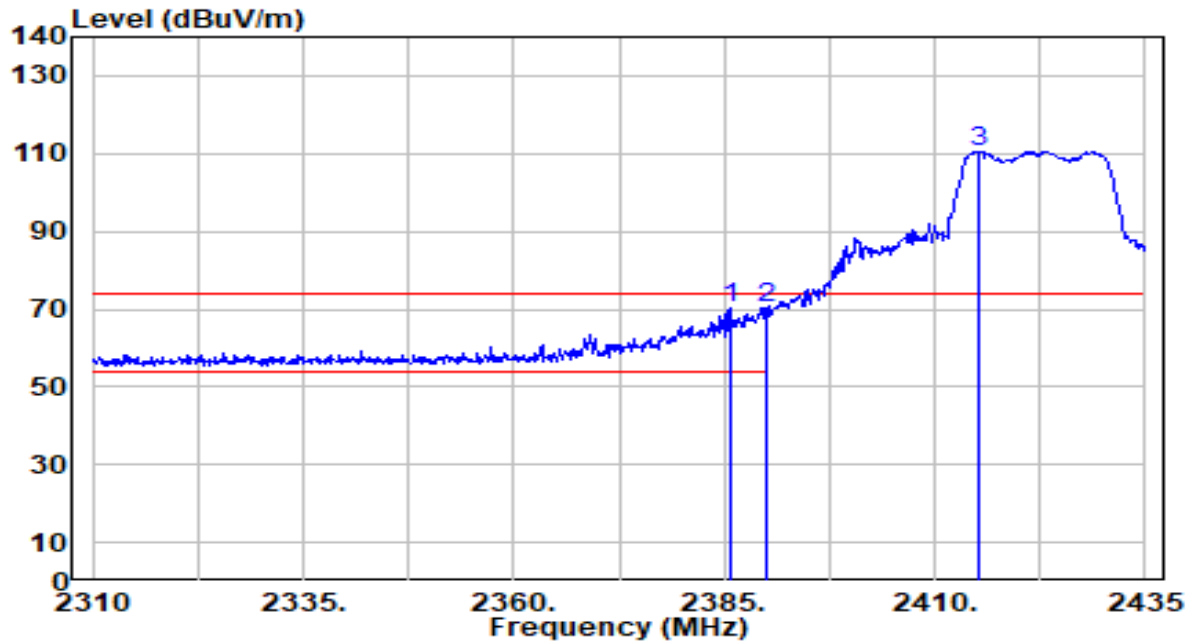


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.625	39.41	31.02	70.43	-3.57	74.00	191	153	Peak
2		2390.000	39.09	31.03	70.12	-3.88	74.00	191	153	Peak
3		2415.250	79.49	31.11	110.60	N/A	N/A	191	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 3_Ant 0	Test Voltage	AC 120V/60Hz

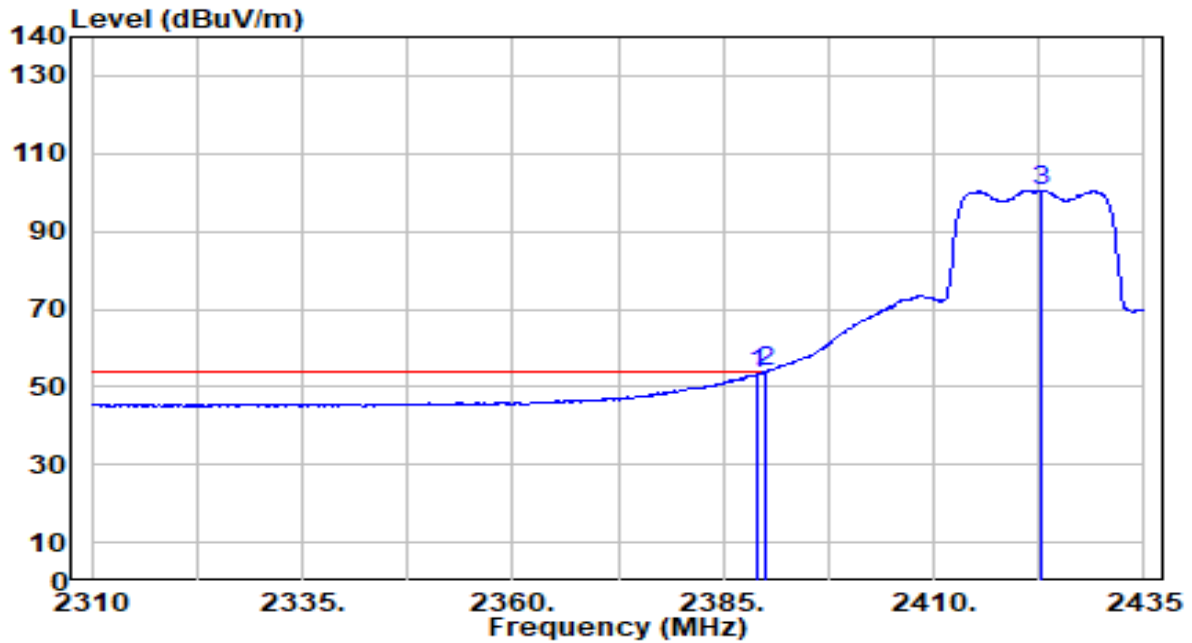


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	22.17	31.03	53.19	-0.81	54.00	191	153	Average
2	*	2390.000	22.79	31.03	53.82	-0.18	54.00	191	153	Average
3		2422.750	69.49	31.14	100.63	N/A	N/A	191	153	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

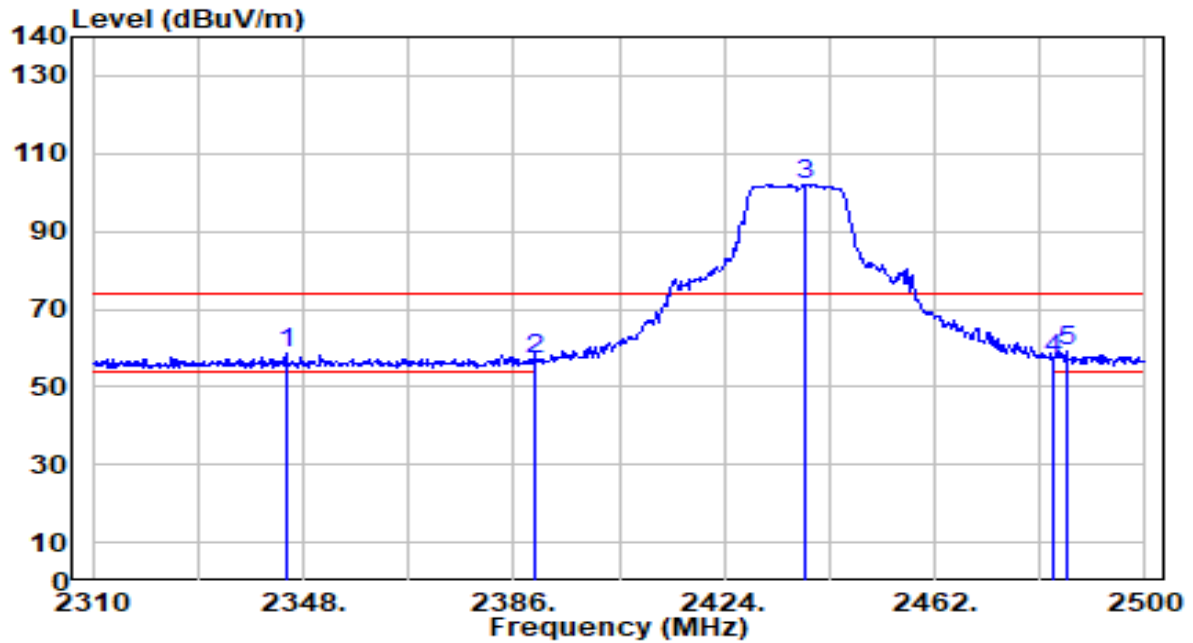


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2344.960	27.87	30.92	58.79	-15.21	74.00	288	218	Peak
2	2390.000	25.85	31.03	56.88	-17.12	74.00	288	218	Peak
3	2438.820	70.87	31.19	102.06	N/A	N/A	288	218	Peak
4	2483.500	25.89	31.35	57.24	-16.76	74.00	288	218	Peak
5	* 2485.750	28.00	31.36	59.36	-14.64	74.00	288	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

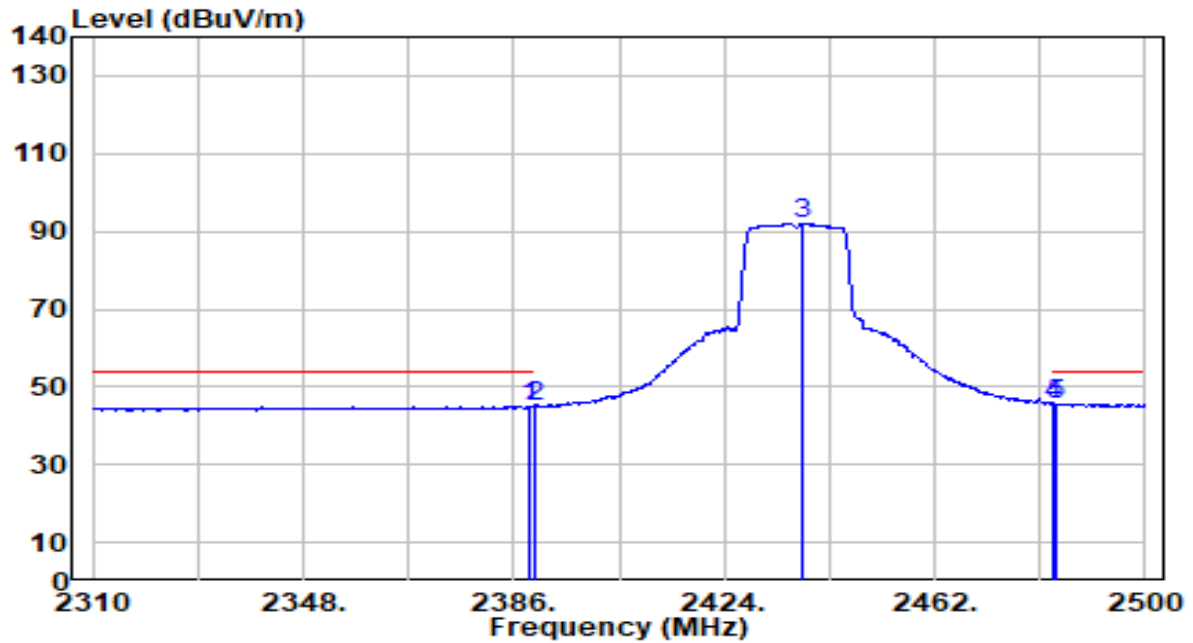


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	13.90	31.03	44.93	-9.07	54.00	288	218	Average
2	2390.000	14.10	31.03	45.13	-8.87	54.00	288	218	Average
3	2438.060	60.86	31.19	92.05	N/A	N/A	288	218	Average
4	2483.500	14.29	31.35	45.64	-8.36	54.00	288	218	Average
5	* 2484.040	14.31	31.35	45.66	-8.34	54.00	288	218	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

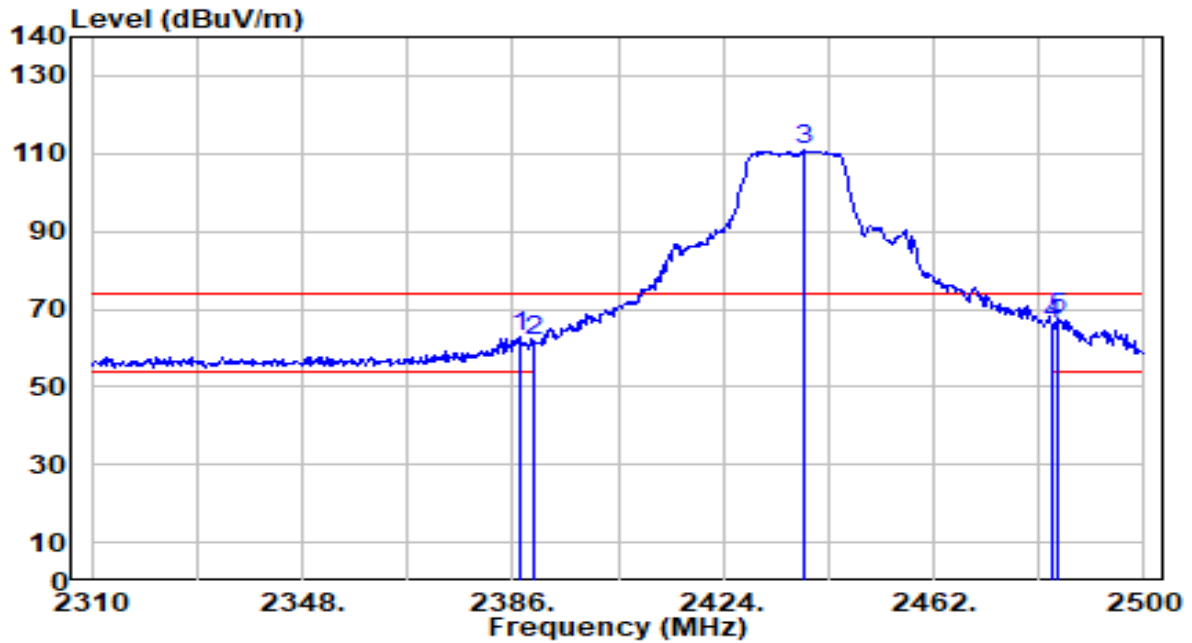


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	31.62	31.02	62.65	-11.35	74.00	190	151	Peak
2	2390.000	30.78	31.03	61.81	-12.19	74.00	190	151	Peak
3	2438.820	79.50	31.19	110.69	N/A	N/A	190	151	Peak
4	2483.500	34.73	31.35	66.08	-7.92	74.00	190	151	Peak
5	* 2484.230	36.02	31.35	67.37	-6.63	74.00	190	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0	Test Voltage	AC 120V/60Hz

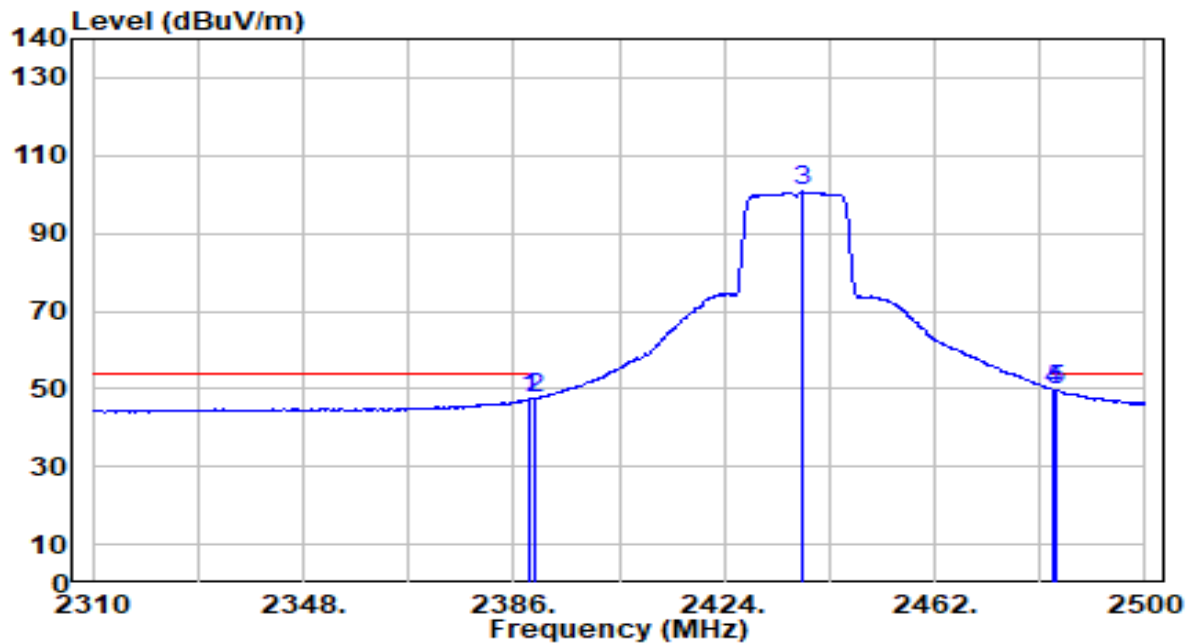


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	16.39	31.03	47.42	-6.58	54.00	190	151	Average
2	2390.000	16.57	31.03	47.60	-6.40	54.00	190	151	Average
3	2438.250	69.52	31.19	100.71	N/A	N/A	190	151	Average
4	2483.500	18.31	31.35	49.67	-4.33	54.00	190	151	Average
5	* 2484.040	18.41	31.35	49.77	-4.23	54.00	190	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 9_Ant 0	Test Voltage	AC 120V/60Hz

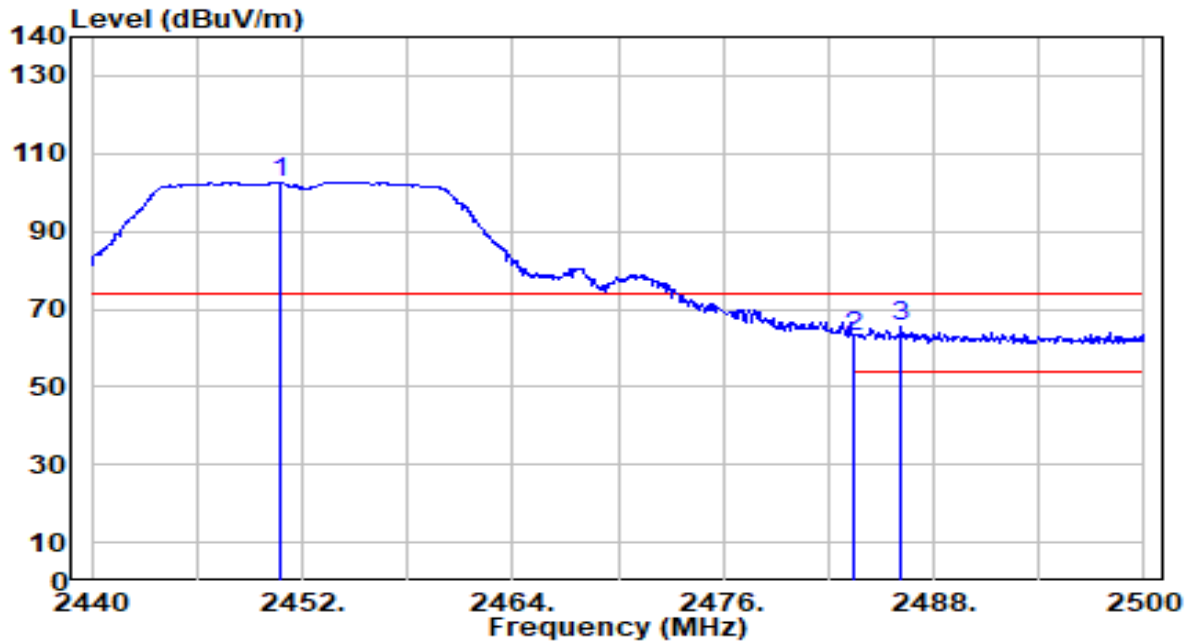


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.680	71.42	31.24	102.66	N/A	N/A	257	22	Peak
2	2483.500	31.67	31.35	63.03	-10.97	74.00	257	22	Peak
3	* 2486.140	34.14	31.36	65.50	-8.50	74.00	257	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 9_Ant 0	Test Voltage	AC 120V/60Hz

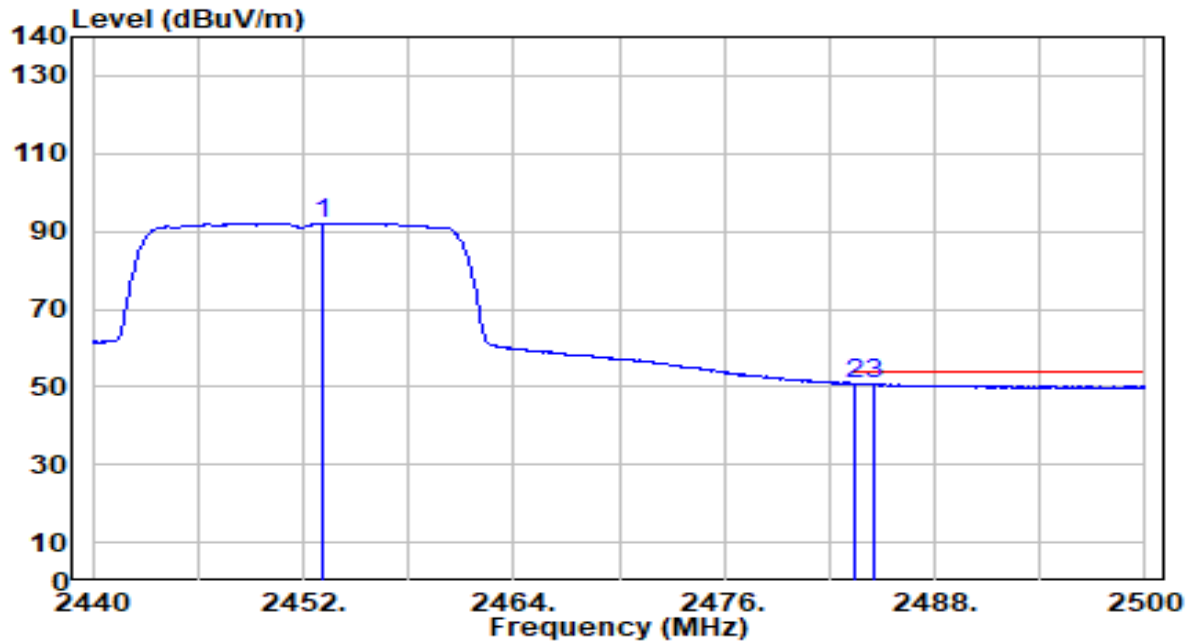


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.140	60.91	31.24	92.15	N/A	N/A	257	22	Average
2	2483.500	19.20	31.35	50.55	-3.45	54.00	257	22	Average
3	* 2484.520	19.28	31.36	50.63	-3.37	54.00	257	22	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 9_Ant 0	Test Voltage	AC 120V/60Hz

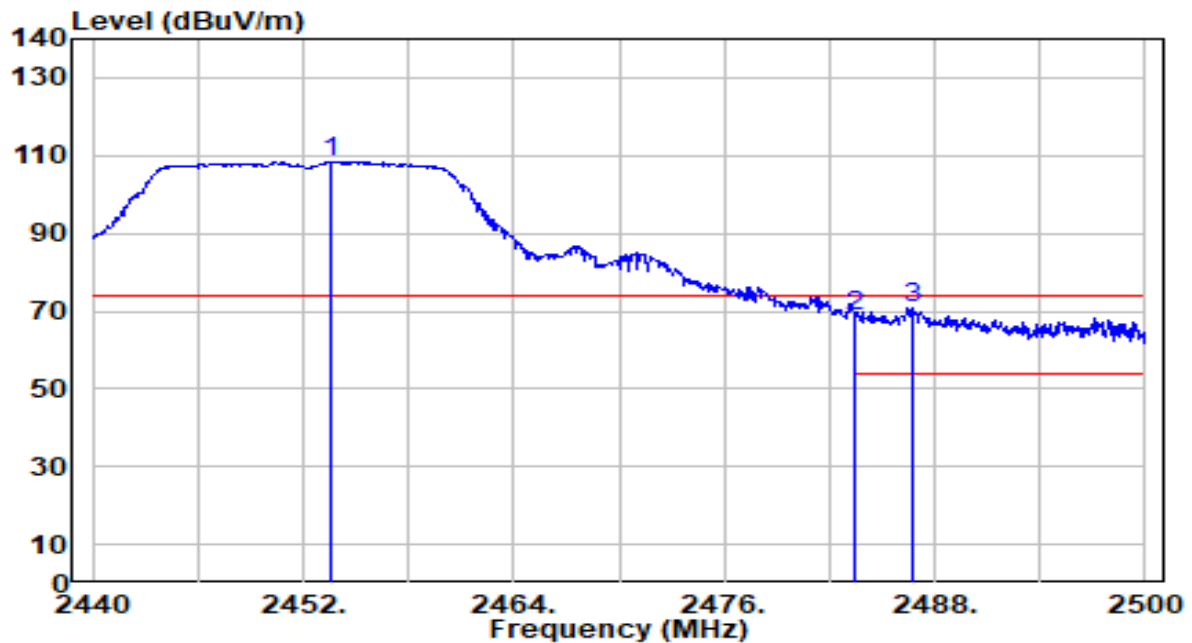


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.620	77.08	31.25	108.33	N/A	N/A	188	154	Peak
2	2483.500	37.18	31.35	68.53	-5.47	74.00	188	154	Peak
3	* 2486.740	39.63	31.36	70.99	-3.01	74.00	188	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 9_Ant 0	Test Voltage	AC 120V/60Hz

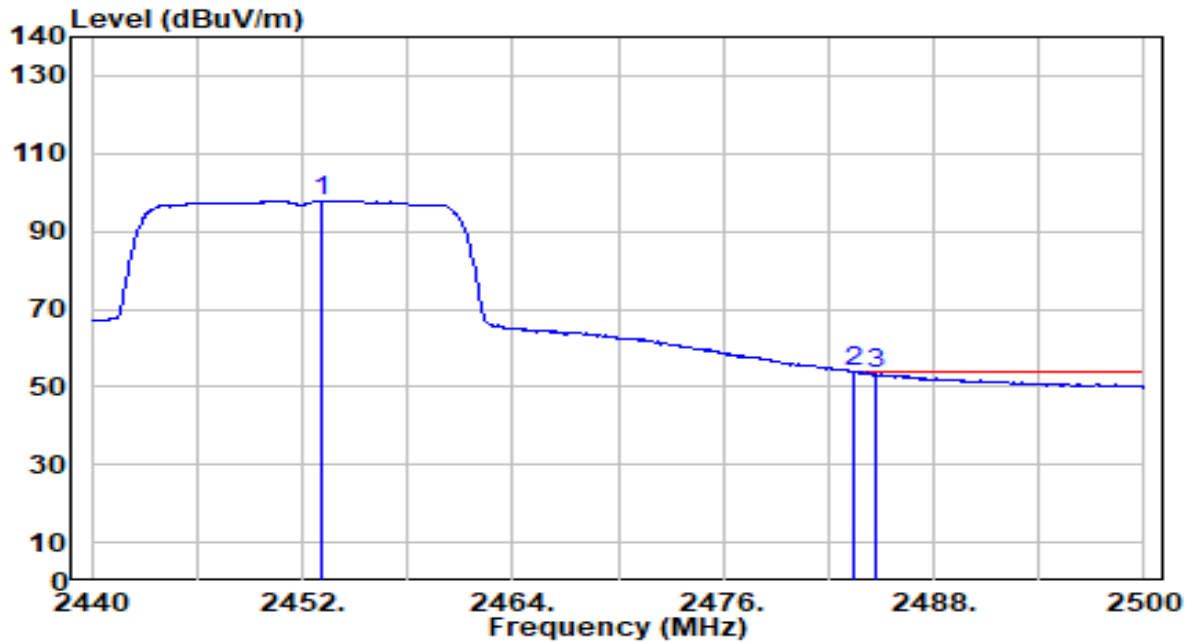


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2453.080	66.70	31.24	97.94	N/A	N/A	188	154	Average
2	*	2483.500	22.32	31.35	53.67	-0.33	54.00	188	154	Average
3		2484.760	22.14	31.36	53.49	-0.51	54.00	188	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 10_Ant 0	Test Voltage	AC 120V/60Hz

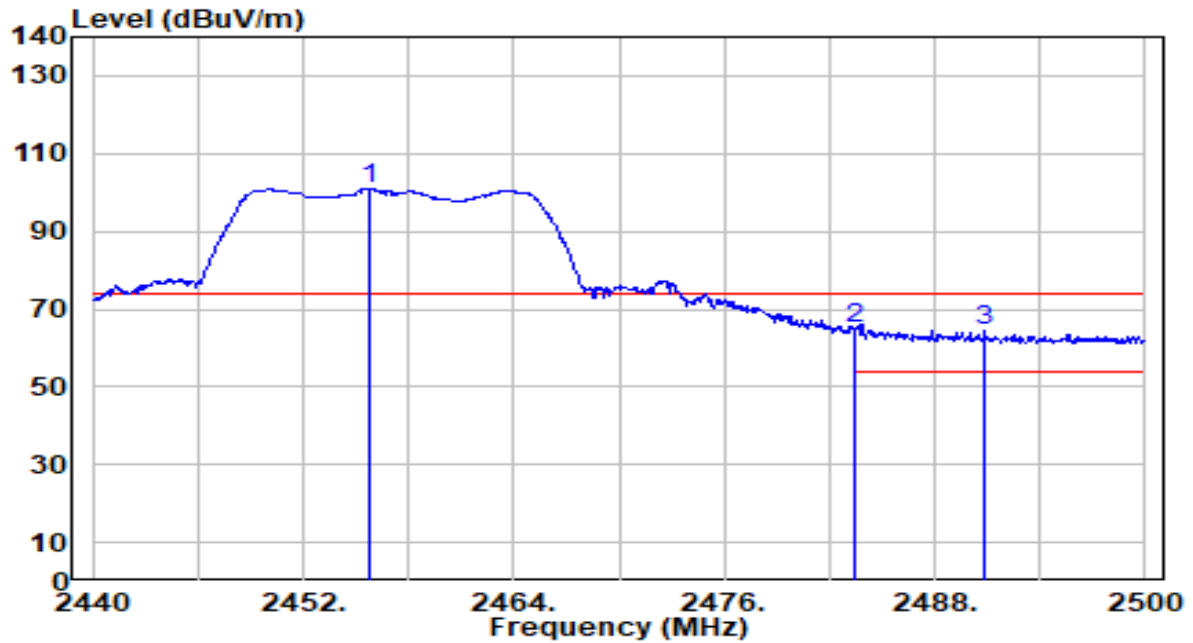


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.840	69.76	31.25	101.02	N/A	N/A	255	22	Peak
2	*	2483.500	33.73	31.35	65.09	-8.91	74.00	255	22	Peak
3		2490.880	33.16	31.38	64.54	-9.46	74.00	255	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 10_Ant 0	Test Voltage	AC 120V/60Hz

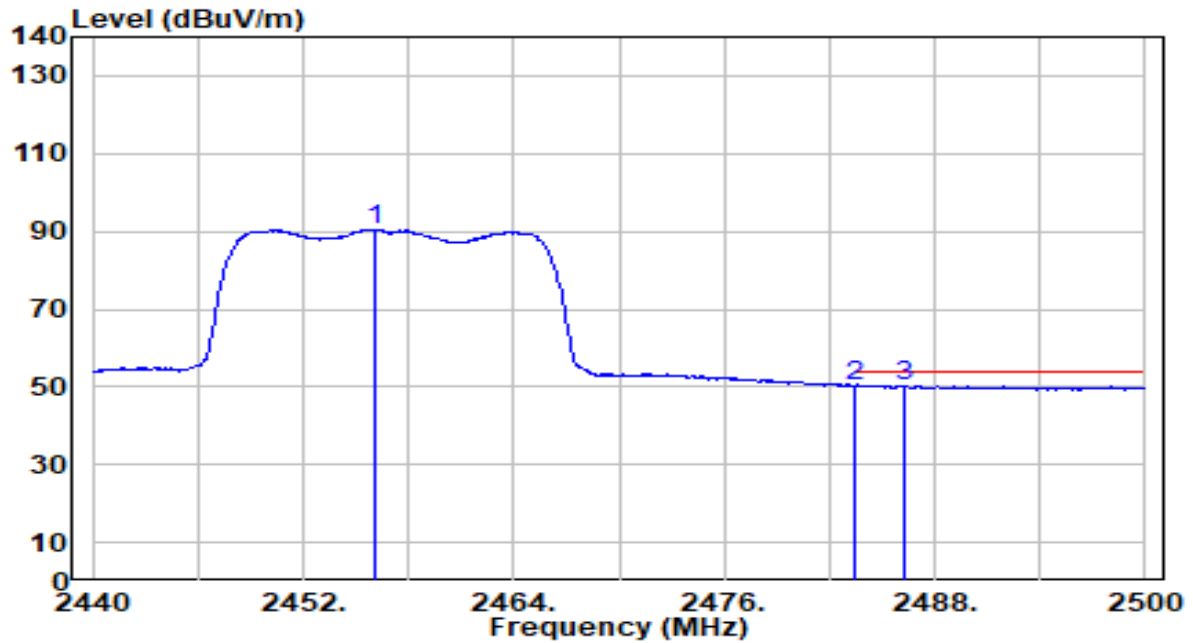


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.140	59.28	31.25	90.53	N/A	N/A	255	22	Average
2	2483.500	18.83	31.35	50.18	-3.82	54.00	255	22	Average
3	* 2486.200	18.87	31.36	50.23	-3.77	54.00	255	22	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 10_Ant 0	Test Voltage	AC 120V/60Hz

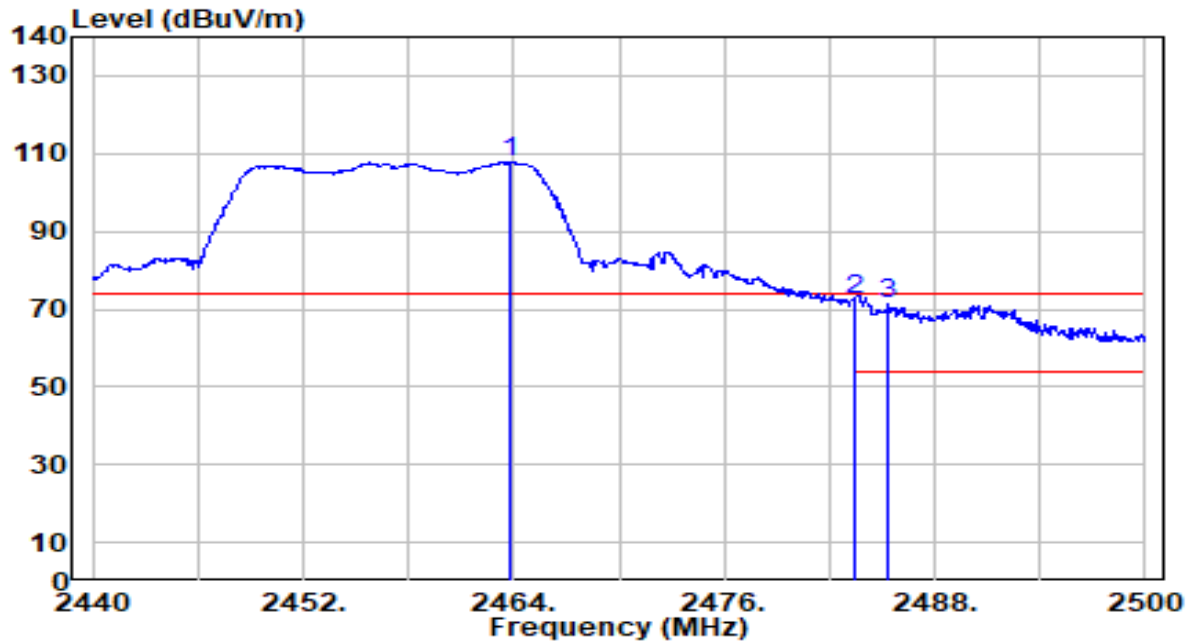


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.820	76.52	31.28	107.81	N/A	N/A	180	112	Peak
2	*	2483.500	40.78	31.35	72.14	-1.86	74.00	180	112	Peak
3		2485.360	39.88	31.36	71.24	-2.76	74.00	180	112	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 10_Ant 0	Test Voltage	AC 120V/60Hz

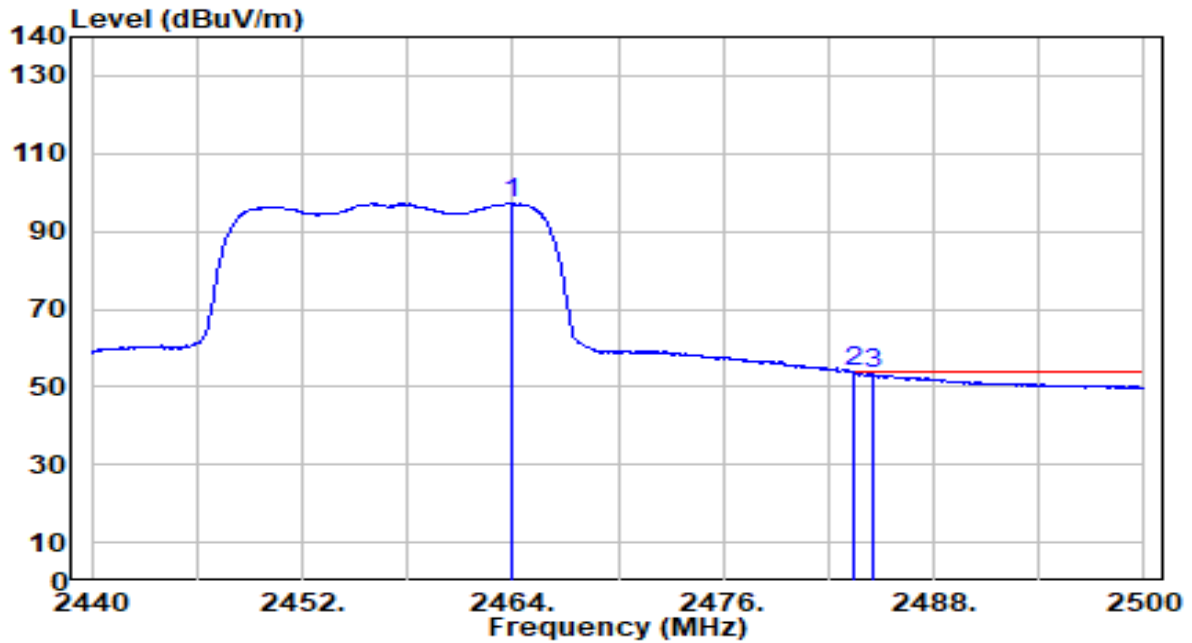


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.940	65.85	31.28	97.13	N/A	N/A	180	112	Average
2	*	2483.500	22.44	31.35	53.79	-0.21	54.00	180	112	Average
3		2484.520	21.75	31.36	53.11	-0.89	54.00	180	112	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

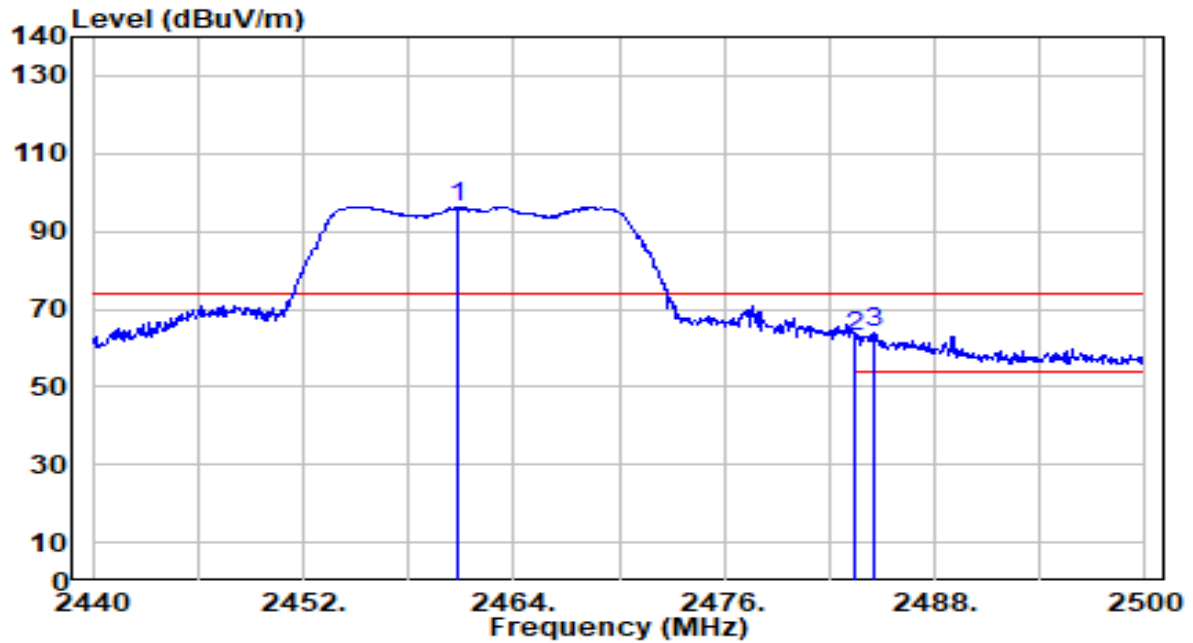


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	65.13	31.27	96.40	N/A	N/A	256	52	Peak
2	2483.500	31.57	31.35	62.93	-11.07	74.00	256	52	Peak
3	* 2484.520	32.56	31.36	63.92	-10.08	74.00	256	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

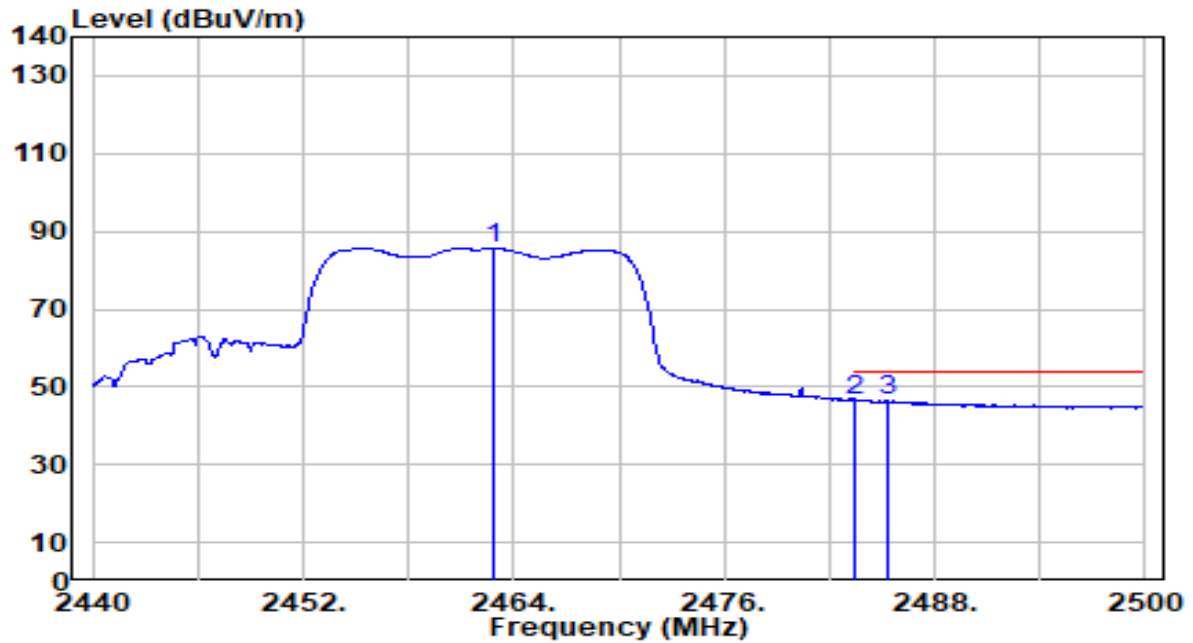


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.800	54.57	31.28	85.85	N/A	N/A	256	52	Average
2	*	2483.500	15.09	31.35	46.44	-7.56	54.00	256	52	Average
3		2485.360	14.94	31.36	46.30	-7.70	54.00	256	52	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

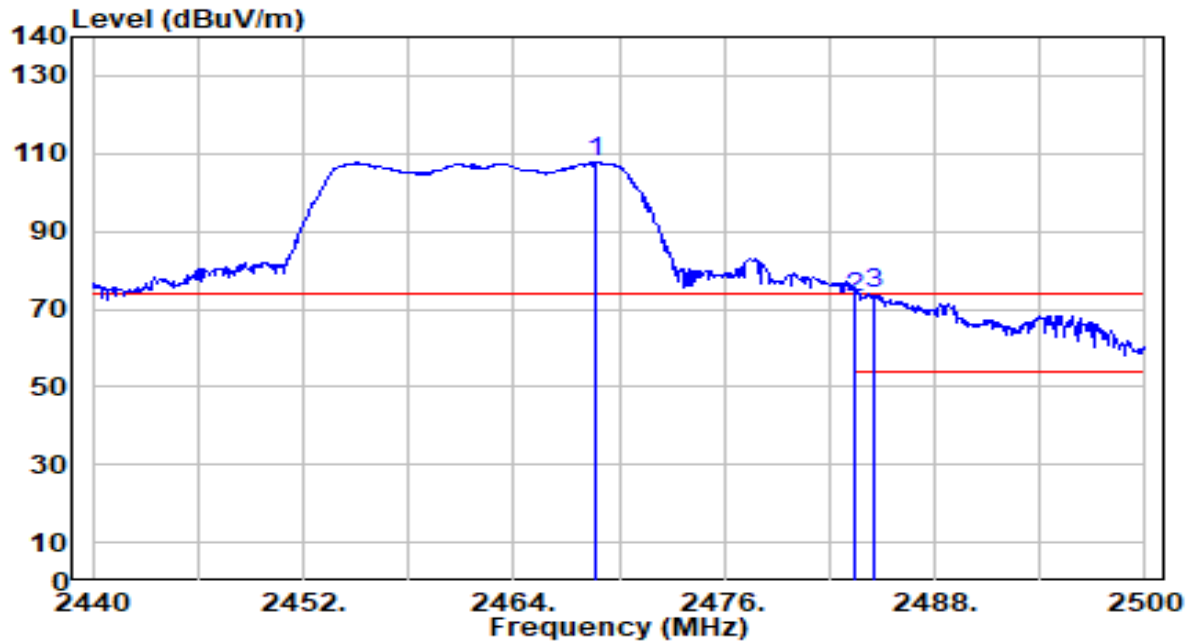


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2468.740	76.41	31.30	107.71	N/A	N/A	180	150	Peak
2		2483.500	41.32	31.35	72.67	-1.33	74.00	180	150	Peak
3	*	2484.580	42.36	31.36	73.71	-0.29	74.00	180	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0	Test Voltage	AC 120V/60Hz

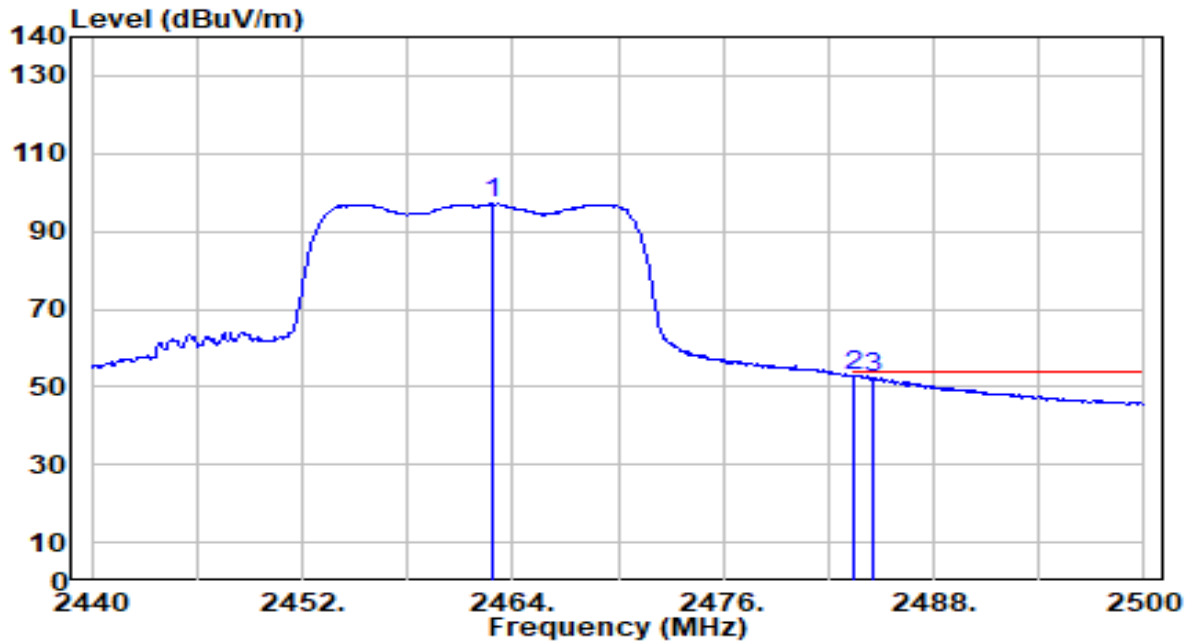


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.920	65.79	31.28	97.07	N/A	N/A	180	150	Average
2	*	2483.500	21.37	31.35	52.73	-1.27	54.00	180	150	Average
3		2484.520	20.83	31.36	52.18	-1.82	54.00	180	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

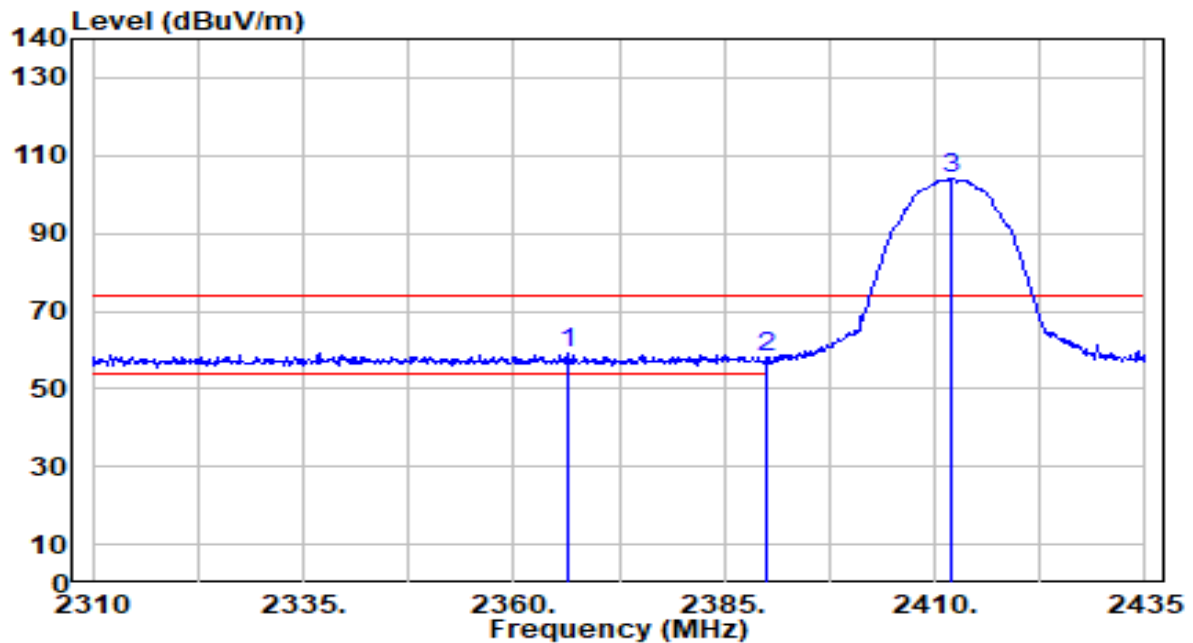


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2366.500	28.17	30.97	59.14	-14.86	74.00	197	148	Peak
2		2390.000	27.07	31.03	58.10	-15.90	74.00	197	148	Peak
3		2412.000	73.21	31.10	104.31	N/A	N/A	197	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

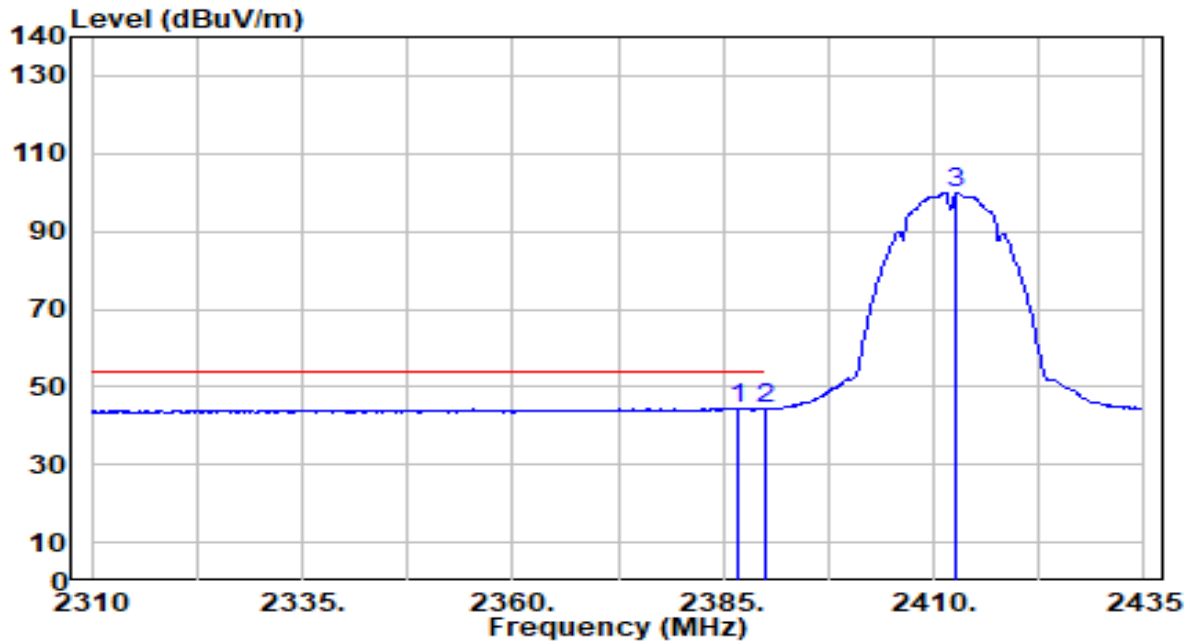


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.750	13.61	31.02	44.63	-9.37	54.00	197	148	Average
2		2390.000	13.11	31.03	44.14	-9.86	54.00	197	148	Average
3		2412.750	68.93	31.10	100.03	N/A	N/A	197	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

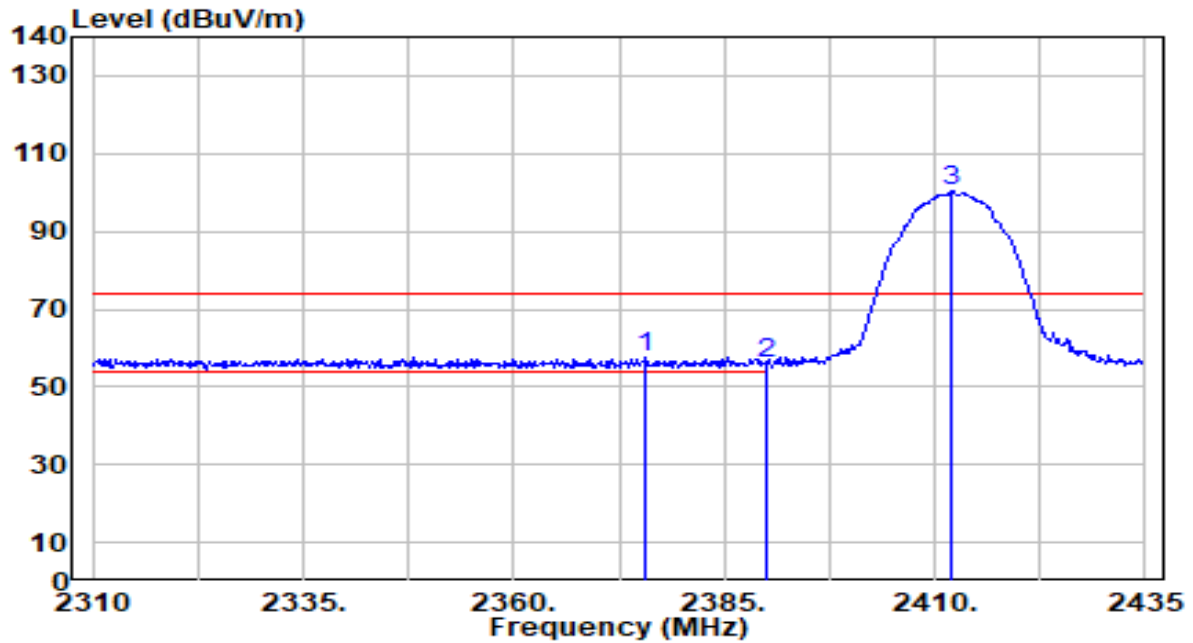


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2375.750	26.78	30.99	57.78	-16.22	74.00	201	259	Peak
2		2390.000	25.08	31.03	56.11	-17.89	74.00	201	259	Peak
3		2412.000	69.12	31.10	100.22	N/A	N/A	201	259	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

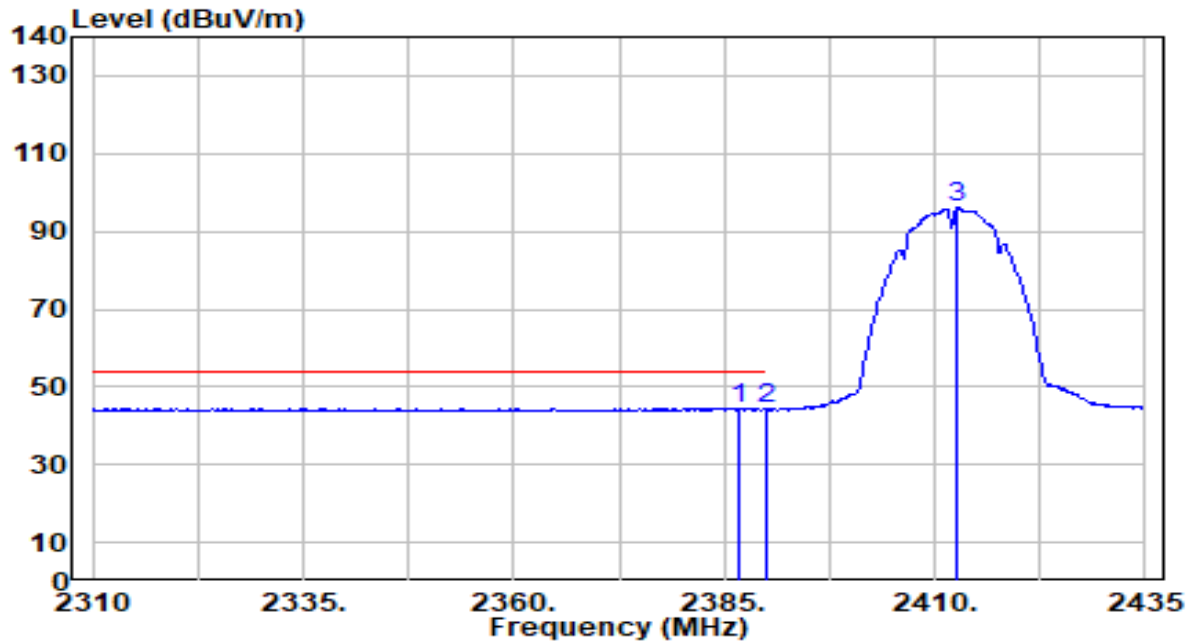


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.875	13.46	31.02	44.48	-9.52	54.00	201	259	Average
2		2390.000	13.16	31.03	44.19	-9.81	54.00	201	259	Average
3		2412.750	64.87	31.10	95.97	N/A	N/A	201	259	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

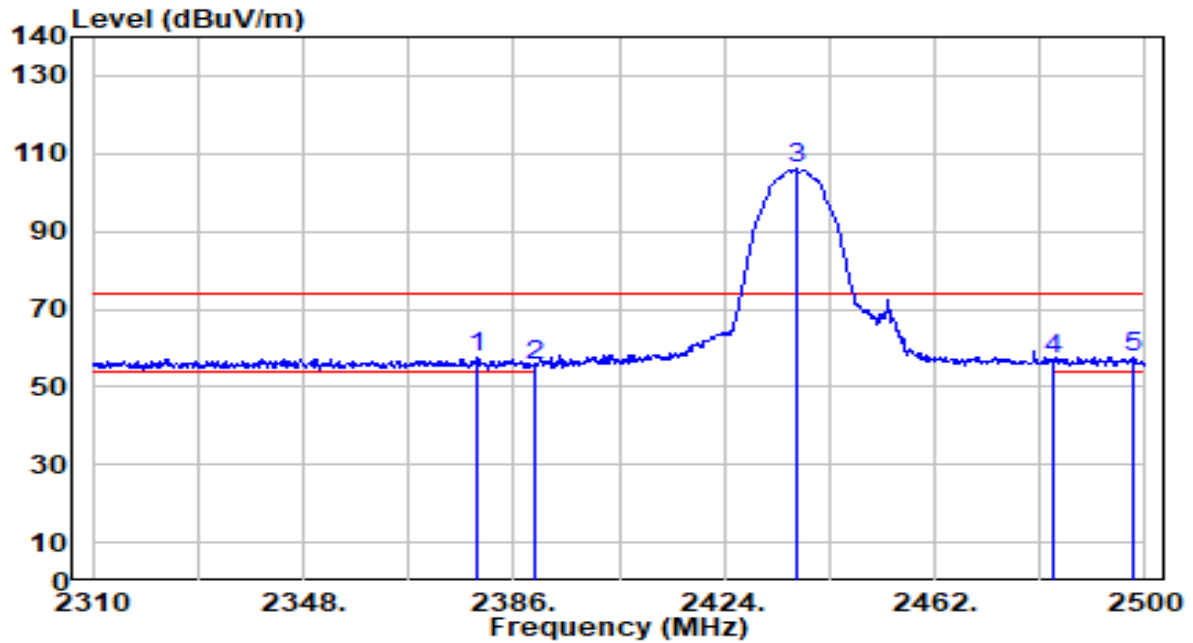


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2379.540	26.65	31.00	57.65	-16.35	74.00	252	30	Peak
2	2390.000	24.56	31.03	55.60	-18.40	74.00	252	30	Peak
3	2436.920	75.08	31.19	106.27	N/A	N/A	252	30	Peak
4	2483.500	25.53	31.35	56.88	-17.12	74.00	252	30	Peak
5	* 2497.720	26.38	31.40	57.78	-16.22	74.00	252	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

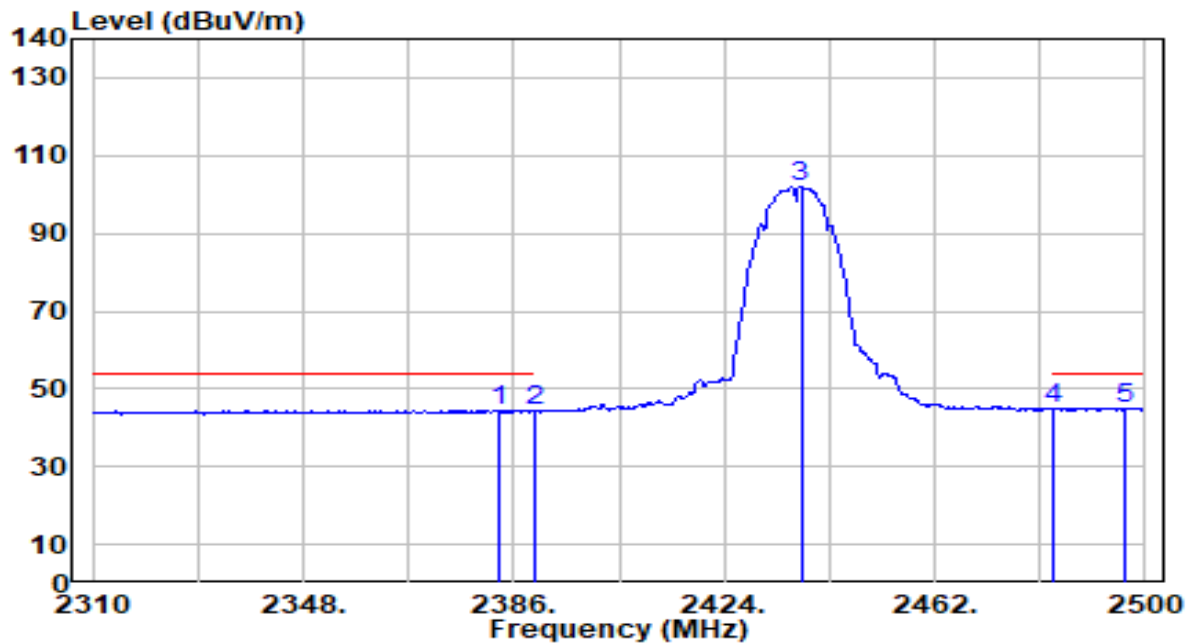


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.530	13.52	31.01	44.53	-9.47	54.00	252	30	Average
2	2390.000	13.32	31.03	44.35	-9.65	54.00	252	30	Average
3	2437.870	70.98	31.19	102.17	N/A	N/A	252	30	Average
4	2483.500	13.39	31.35	44.74	-9.26	54.00	252	30	Average
5	* 2496.580	13.76	31.40	45.16	-8.84	54.00	252	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

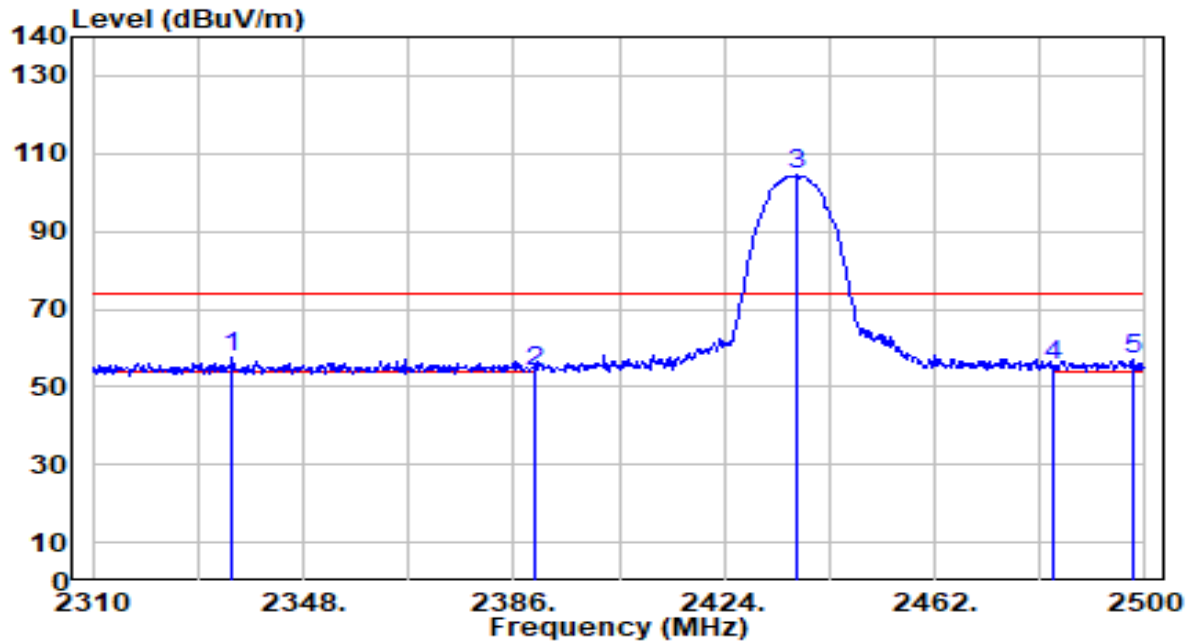


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2335.270	26.72	30.89	57.61	-16.39	74.00	100	66	Peak
2		2390.000	23.04	31.03	54.07	-19.93	74.00	100	66	Peak
3		2437.110	73.53	31.19	104.72	N/A	N/A	100	66	Peak
4		2483.500	23.91	31.35	55.26	-18.74	74.00	100	66	Peak
5		2497.720	25.52	31.40	56.92	-17.08	74.00	100	66	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

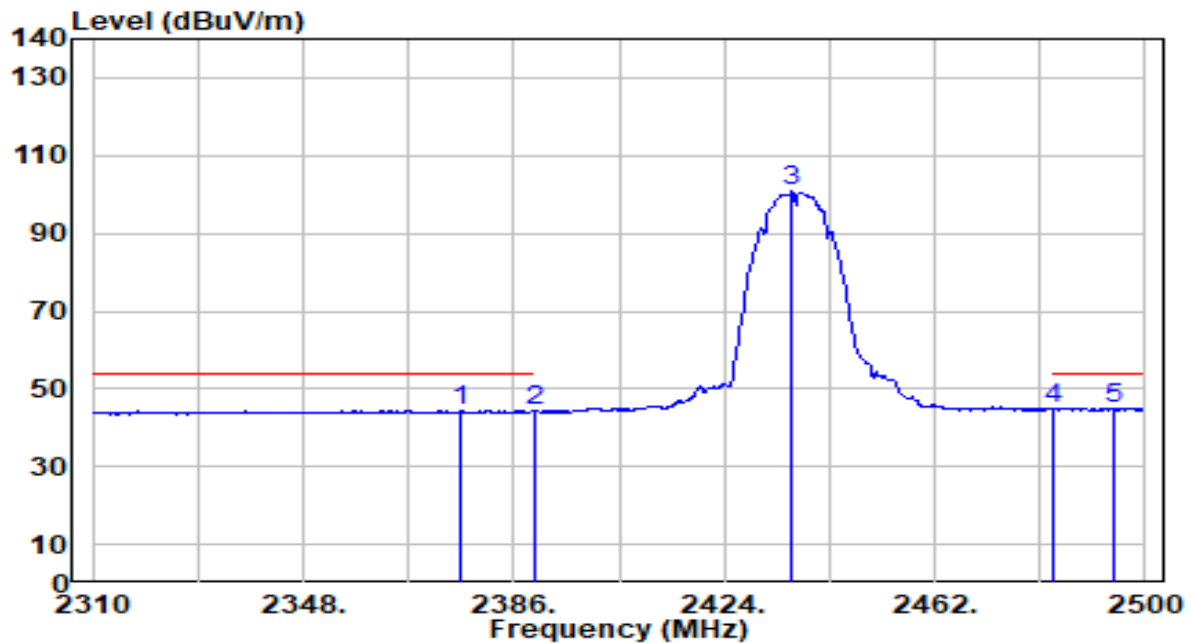


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2376.500	13.31	31.00	44.31	-9.69	54.00	100	66	Average
2	2390.000	13.12	31.03	44.15	-9.85	54.00	100	66	Average
3	2436.160	69.55	31.18	100.74	N/A	N/A	100	66	Average
4	2483.500	13.34	31.35	44.69	-9.31	54.00	100	66	Average
5	* 2494.490	13.60	31.39	44.99	-9.01	54.00	100	66	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

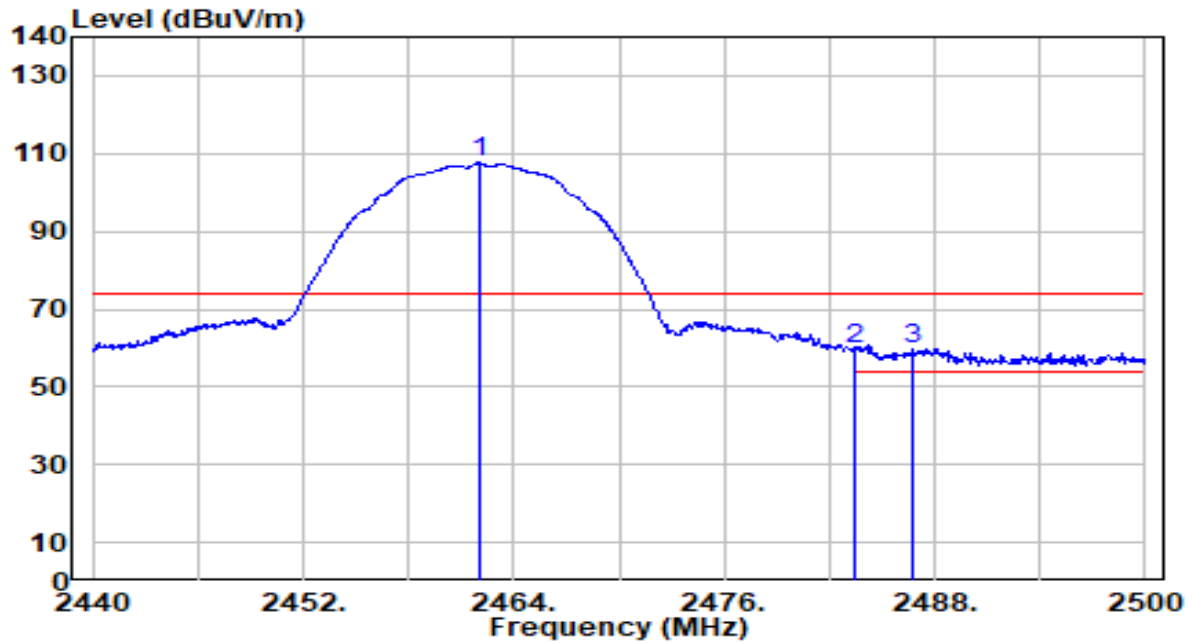


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.020	76.30	31.28	107.58	N/A	N/A	203	329	Peak
2	*	2483.500	28.42	31.35	59.78	-14.22	74.00	203	329	Peak
3		2486.740	28.25	31.36	59.61	-14.39	74.00	203	329	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

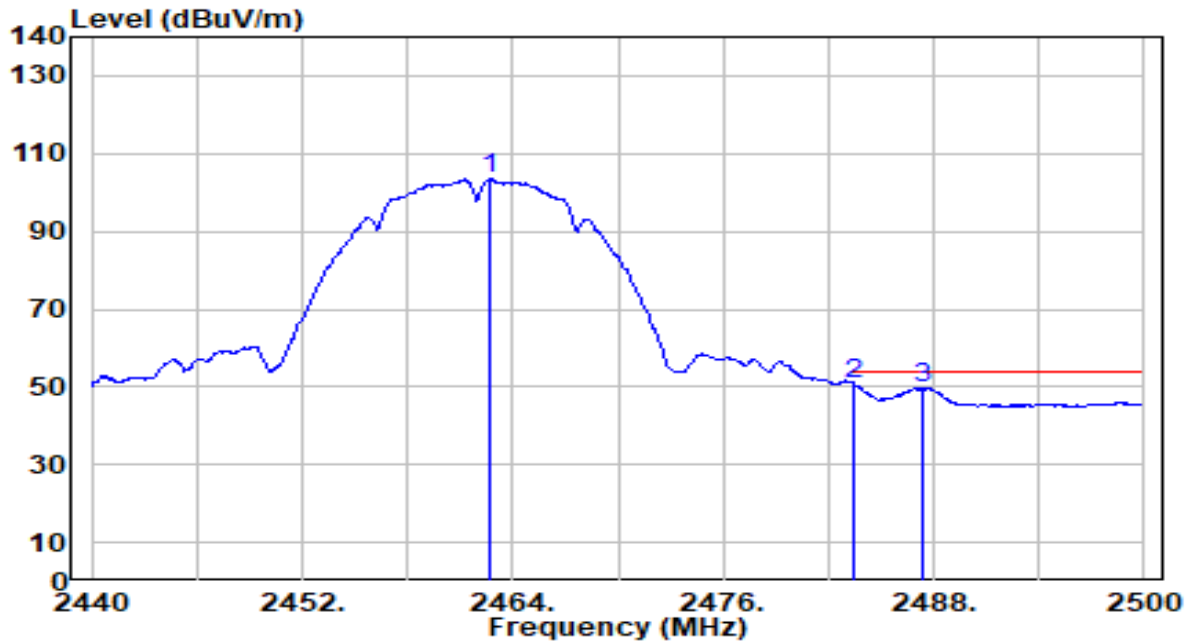


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.740	72.17	31.28	103.45	N/A	N/A	203	329	Average
2	*	2483.500	19.30	31.35	50.65	-3.35	54.00	203	329	Average
3		2487.400	18.24	31.37	49.61	-4.39	54.00	203	329	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

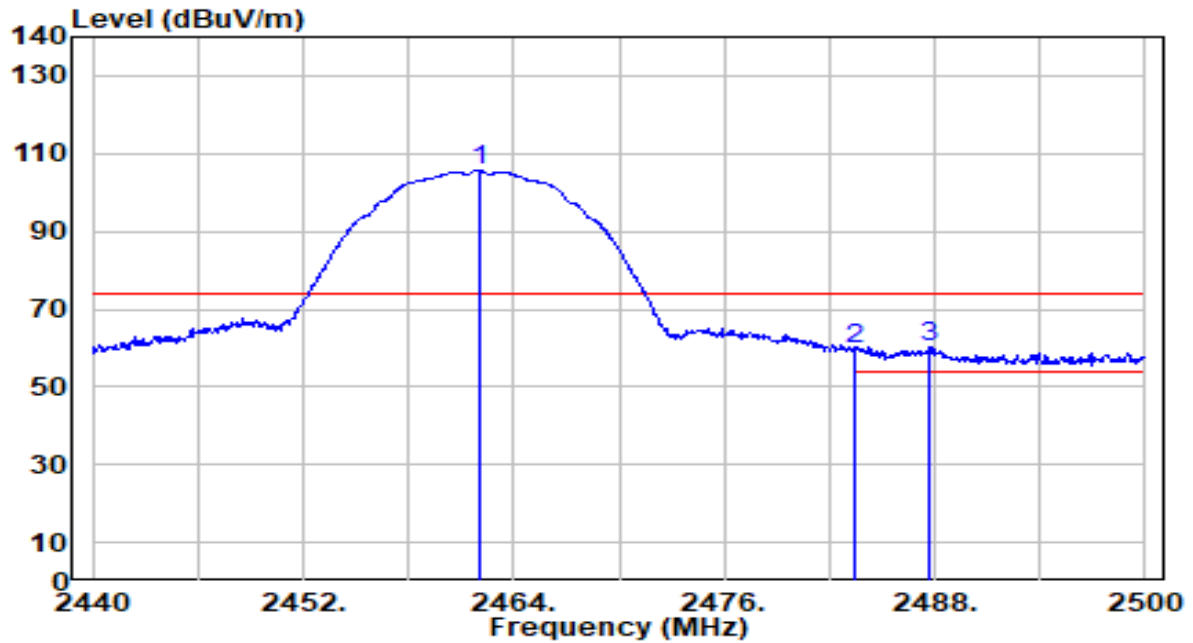


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.020	74.51	31.28	105.79	N/A	N/A	205	266	Peak
2	2483.500	28.30	31.35	59.66	-14.34	74.00	205	266	Peak
3	* 2487.760	28.69	31.37	60.05	-13.95	74.00	205	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-05
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11b_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

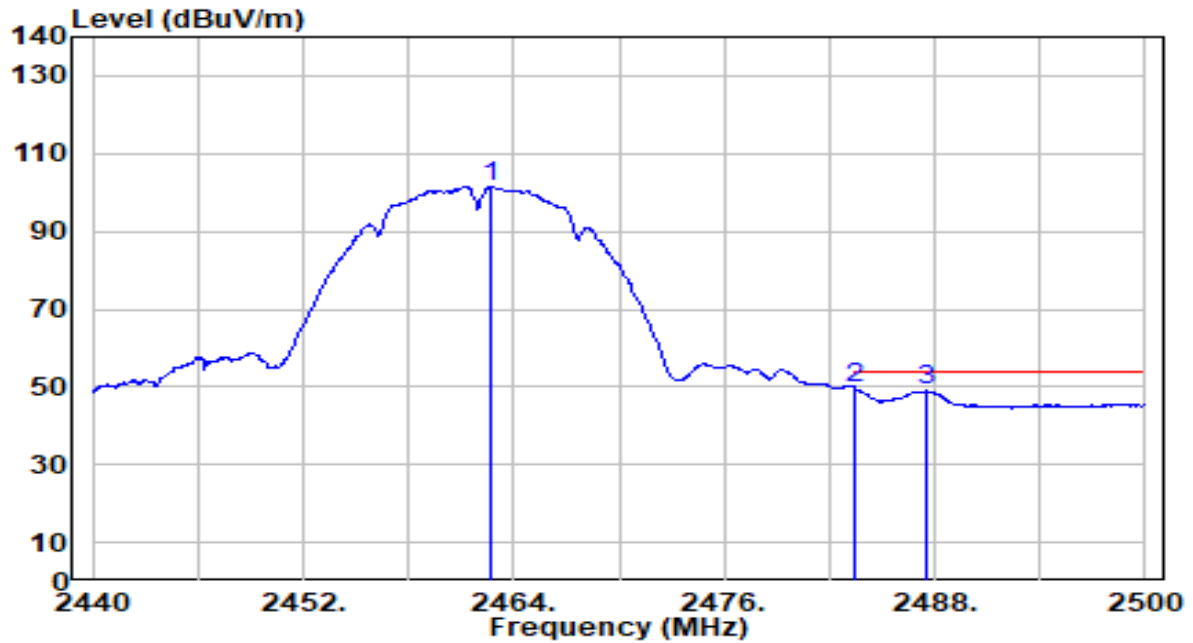


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.740	70.29	31.28	101.57	N/A	N/A	205	266	Average
2	*	2483.500	18.18	31.35	49.54	-4.46	54.00	205	266	Average
3		2487.460	17.68	31.37	49.04	-4.96	54.00	205	266	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

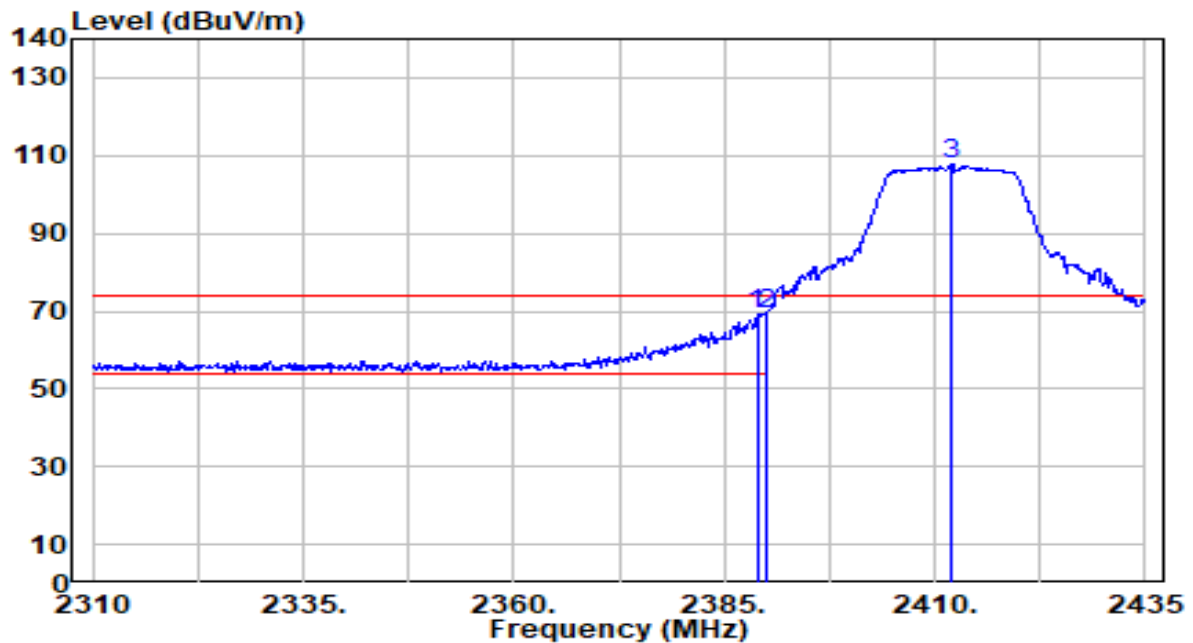


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	37.96	31.03	68.99	-5.01	74.00	199	147	Peak
2	*	2390.000	38.38	31.03	69.42	-4.58	74.00	199	147	Peak
3		2411.875	76.83	31.10	107.93	N/A	N/A	199	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

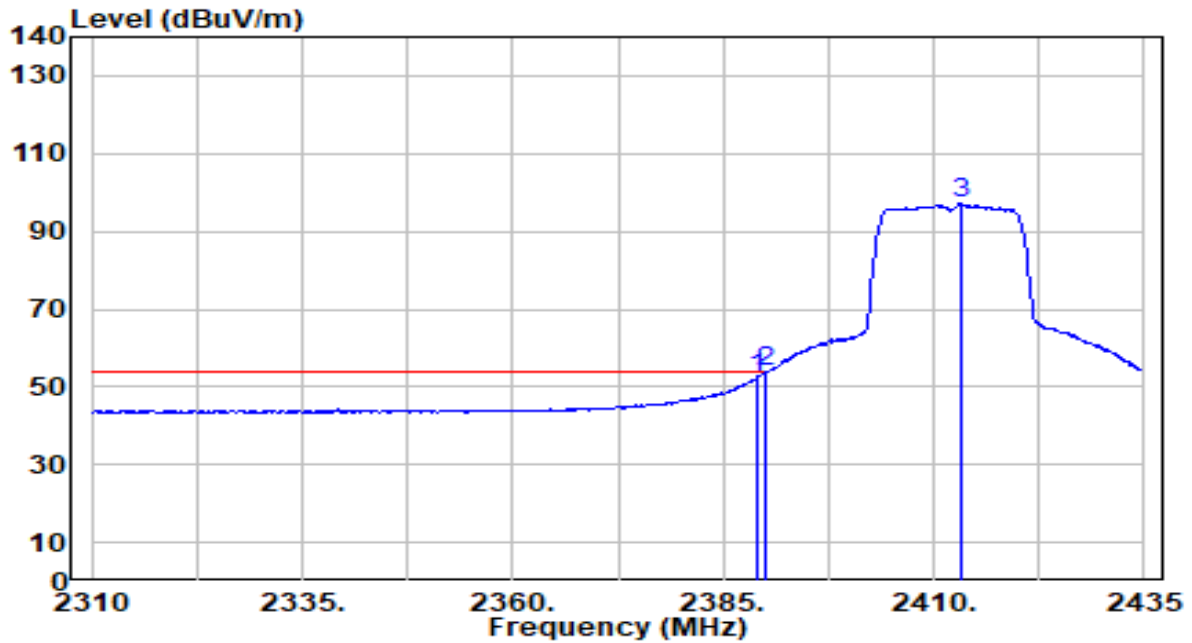


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	21.35	31.03	52.38	-1.62	54.00	199	147	Average
2	*	2390.000	22.73	31.03	53.76	-0.24	54.00	199	147	Average
3		2413.125	65.97	31.10	97.07	N/A	N/A	199	147	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

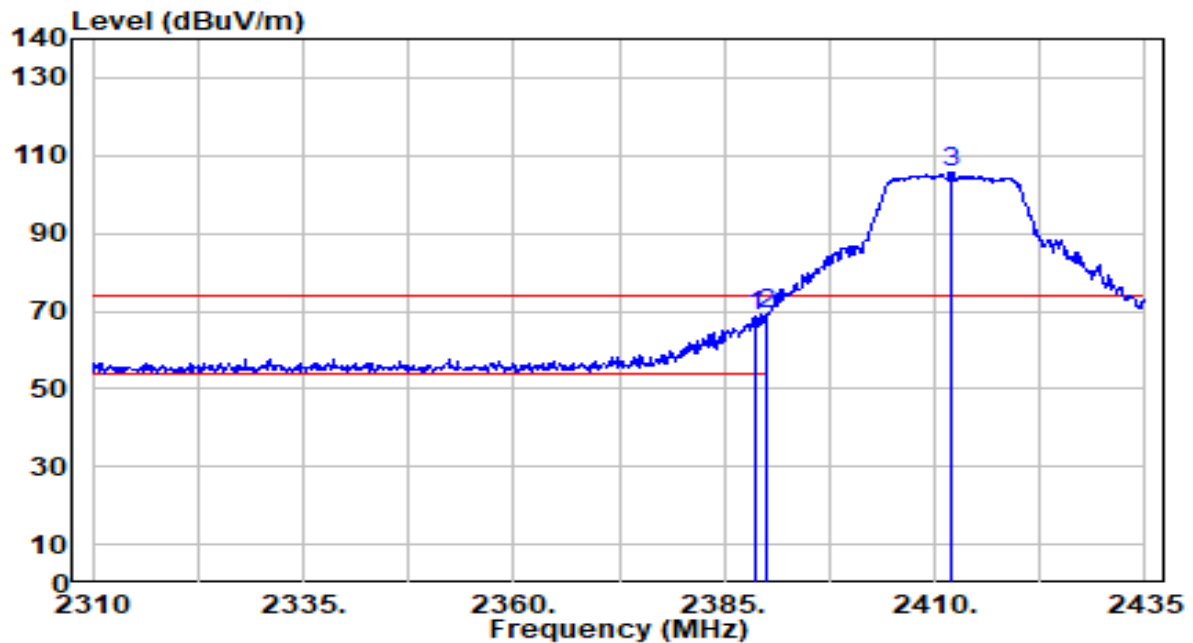


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.750	37.52	31.03	68.54	-5.46	74.00	277	110	Peak
2	*	2390.000	37.92	31.03	68.95	-5.05	74.00	277	110	Peak
3		2411.875	74.81	31.10	105.91	N/A	N/A	277	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

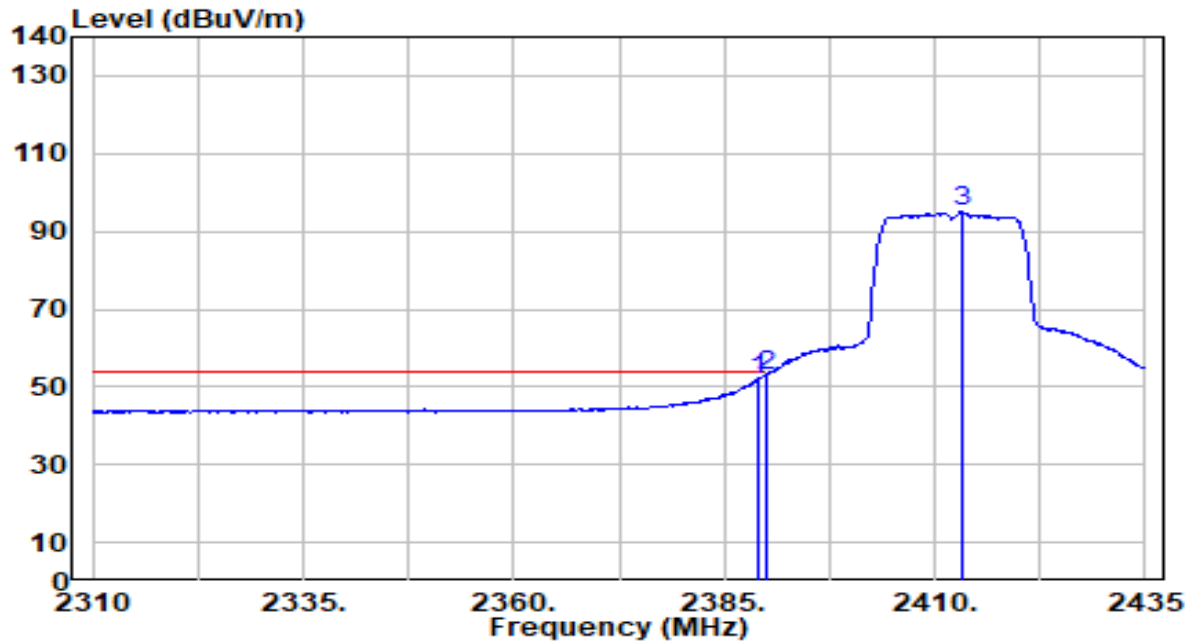


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	20.63	31.03	51.66	-2.34	54.00	277	110	Average
2	*	2390.000	22.02	31.03	53.05	-0.95	54.00	277	110	Average
3		2413.125	63.75	31.10	94.85	N/A	N/A	277	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 2_Ant 1	Test Voltage	AC 120V/60Hz

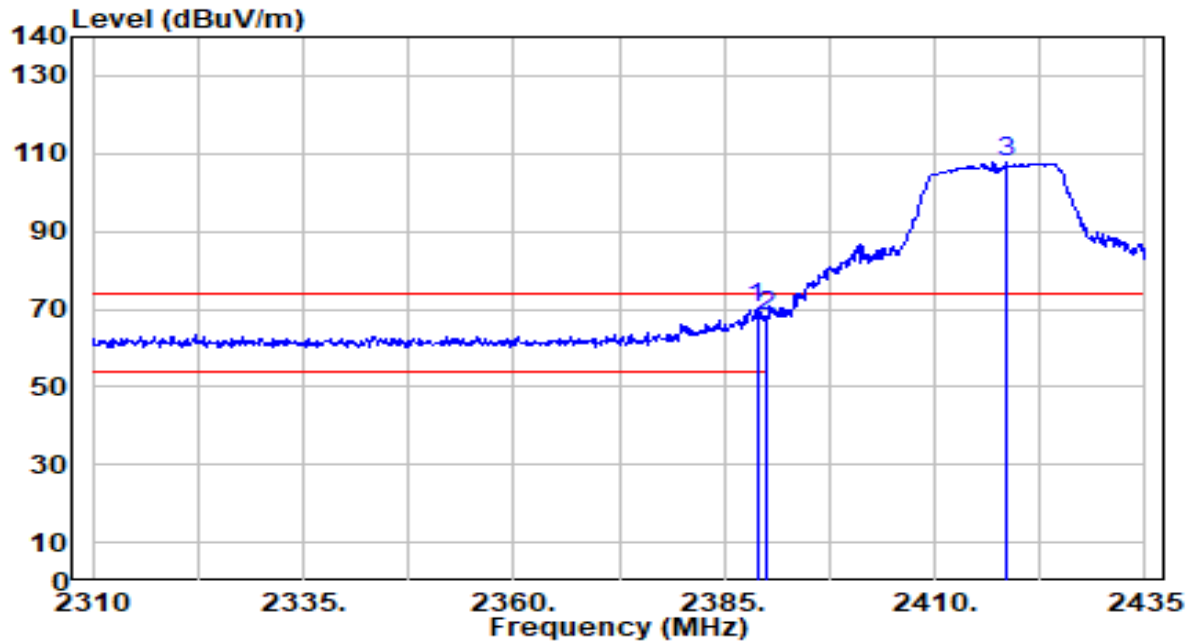


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	39.48	31.03	70.51	-3.49	74.00	202	179	Peak
2		2390.000	37.37	31.03	68.40	-5.60	74.00	202	179	Peak
3		2418.625	76.57	31.12	107.69	N/A	N/A	202	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 2_Ant 1	Test Voltage	AC 120V/60Hz

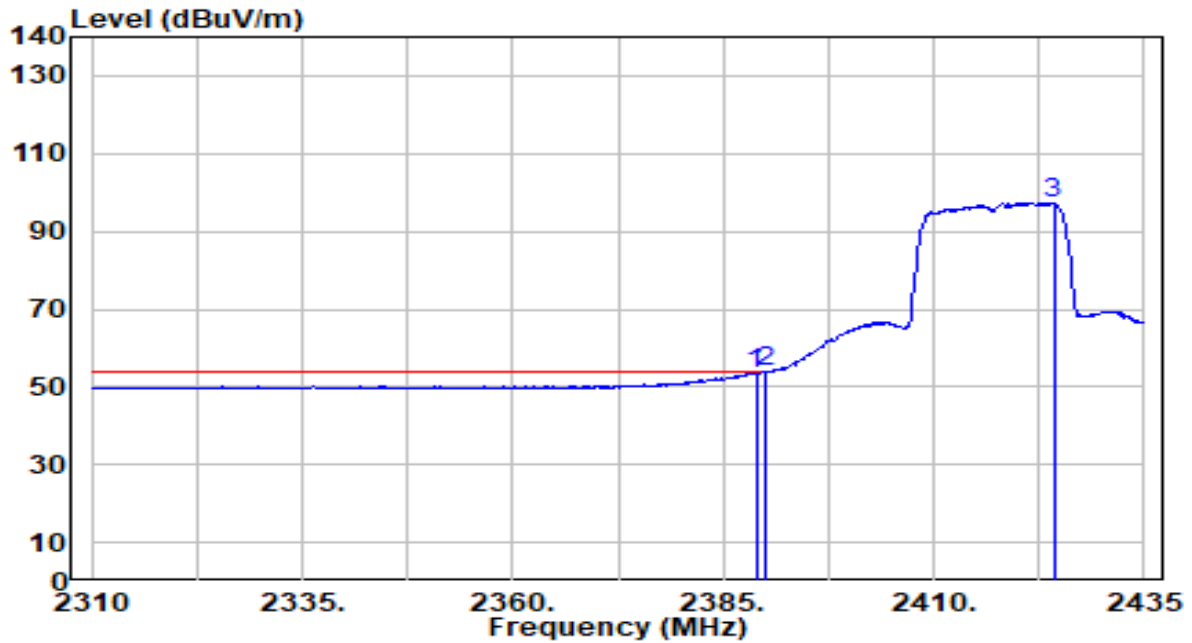


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	22.28	31.03	53.31	-0.69	54.00	202	179	Average
2	*	2390.000	22.68	31.03	53.71	-0.29	54.00	202	179	Average
3		2424.250	66.04	31.14	97.18	N/A	N/A	202	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 2_Ant 1	Test Voltage	AC 120V/60Hz

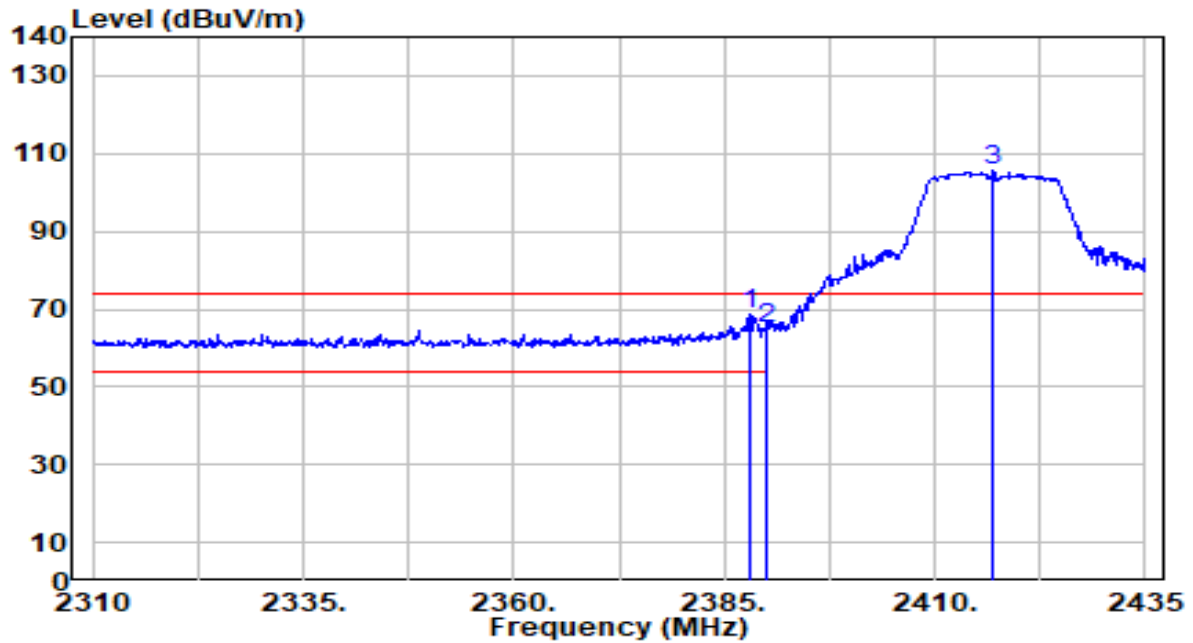


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.125	37.42	31.03	68.45	-5.55	74.00	141	92	Peak
2		2390.000	34.03	31.03	65.06	-8.94	74.00	141	92	Peak
3		2416.875	74.30	31.12	105.42	N/A	N/A	141	92	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 2_Ant 1	Test Voltage	AC 120V/60Hz

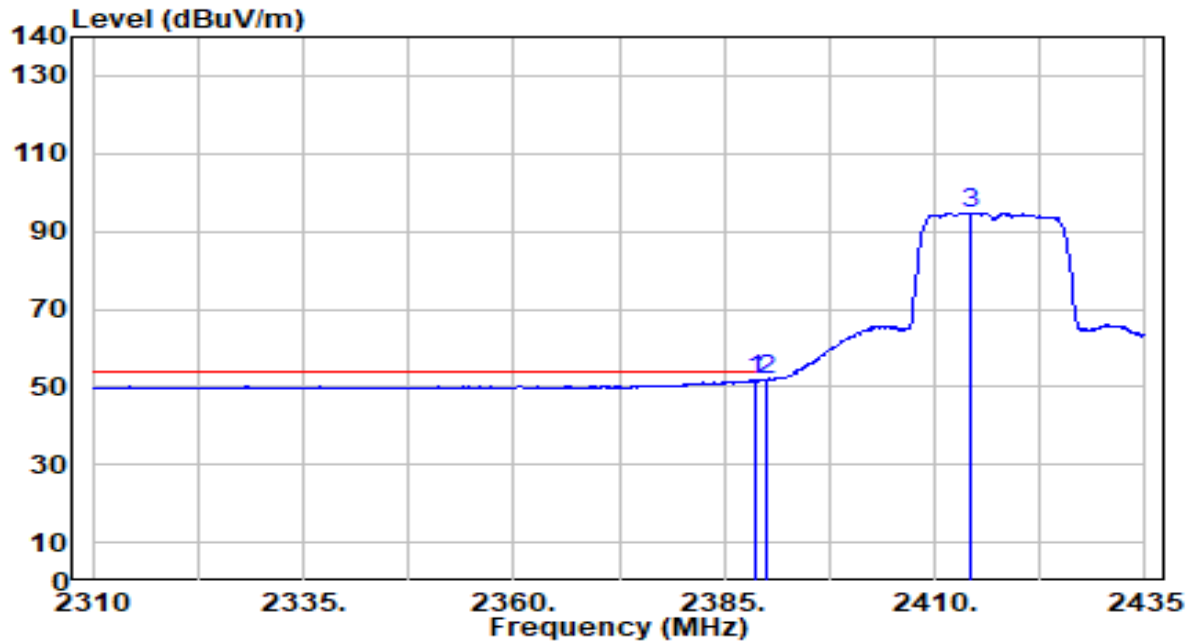


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.750	20.91	31.03	51.94	-2.06	54.00	141	92	Average
2		2390.000	20.78	31.03	51.81	-2.19	54.00	141	92	Average
3		2414.375	63.60	31.11	94.71	N/A	N/A	141	92	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

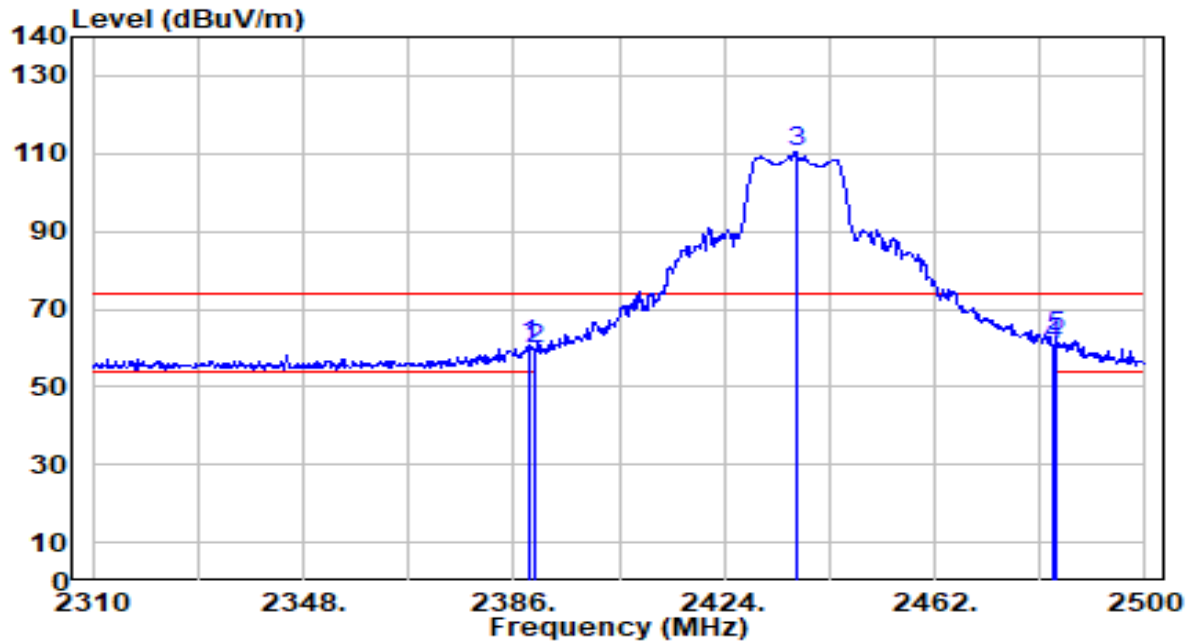


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	29.93	31.03	60.96	-13.04	74.00	177	156	Peak
2	2390.000	28.50	31.03	59.53	-14.47	74.00	177	156	Peak
3	2436.920	79.24	31.19	110.42	N/A	N/A	177	156	Peak
4	2483.500	29.25	31.35	60.60	-13.40	74.00	177	156	Peak
5	* 2484.040	31.41	31.35	62.76	-11.24	74.00	177	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

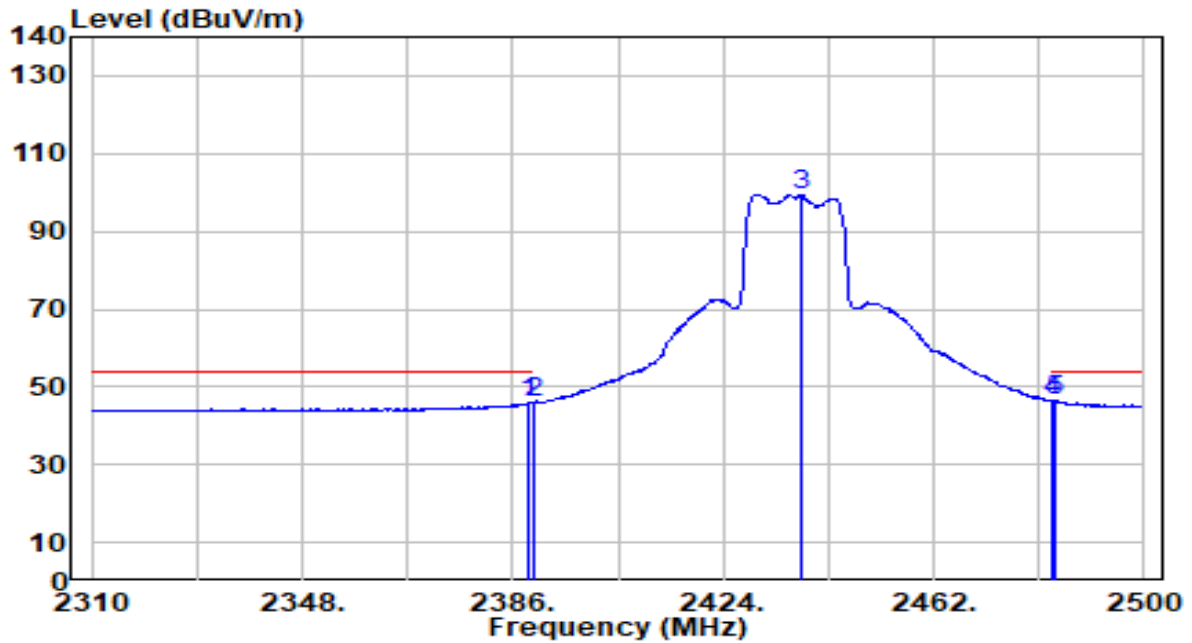


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	15.03	31.03	46.06	-7.94	54.00	177	156	Average
2	2390.000	15.03	31.03	46.06	-7.94	54.00	177	156	Average
3	2438.060	68.37	31.19	99.56	N/A	N/A	177	156	Average
4	2483.500	14.96	31.35	46.31	-7.69	54.00	177	156	Average
5	* 2484.040	15.06	31.35	46.41	-7.59	54.00	177	156	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

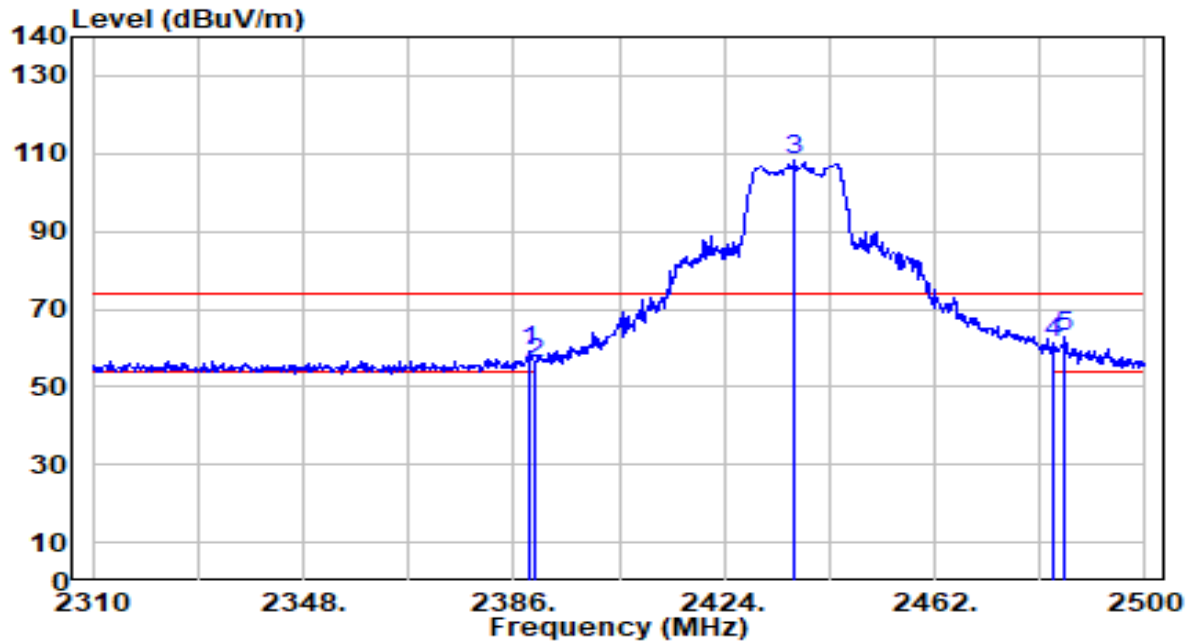


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	27.88	31.03	58.91	-15.09	74.00	108	68	Peak
2	2390.000	24.95	31.03	55.98	-18.02	74.00	108	68	Peak
3	2436.730	76.92	31.19	108.11	N/A	N/A	108	68	Peak
4	2483.500	29.74	31.35	61.09	-12.91	74.00	108	68	Peak
5	* 2485.370	31.62	31.36	62.98	-11.02	74.00	108	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

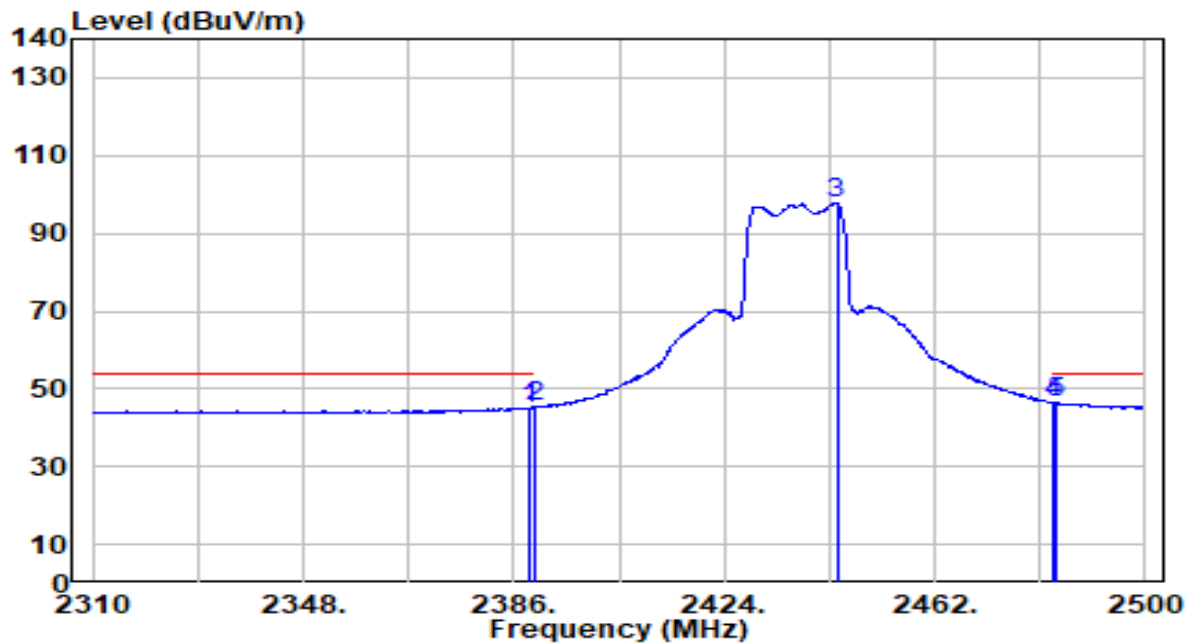


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	14.13	31.03	45.16	-8.84	54.00	108	68	Average
2	2390.000	14.17	31.03	45.21	-8.79	54.00	108	68	Average
3	2444.330	66.59	31.21	97.80	N/A	N/A	108	68	Average
4	* 2483.500	15.19	31.35	46.54	-7.46	54.00	108	68	Average
5	2484.040	14.99	31.35	46.34	-7.66	54.00	108	68	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 10_Ant 1	Test Voltage	AC 120V/60Hz

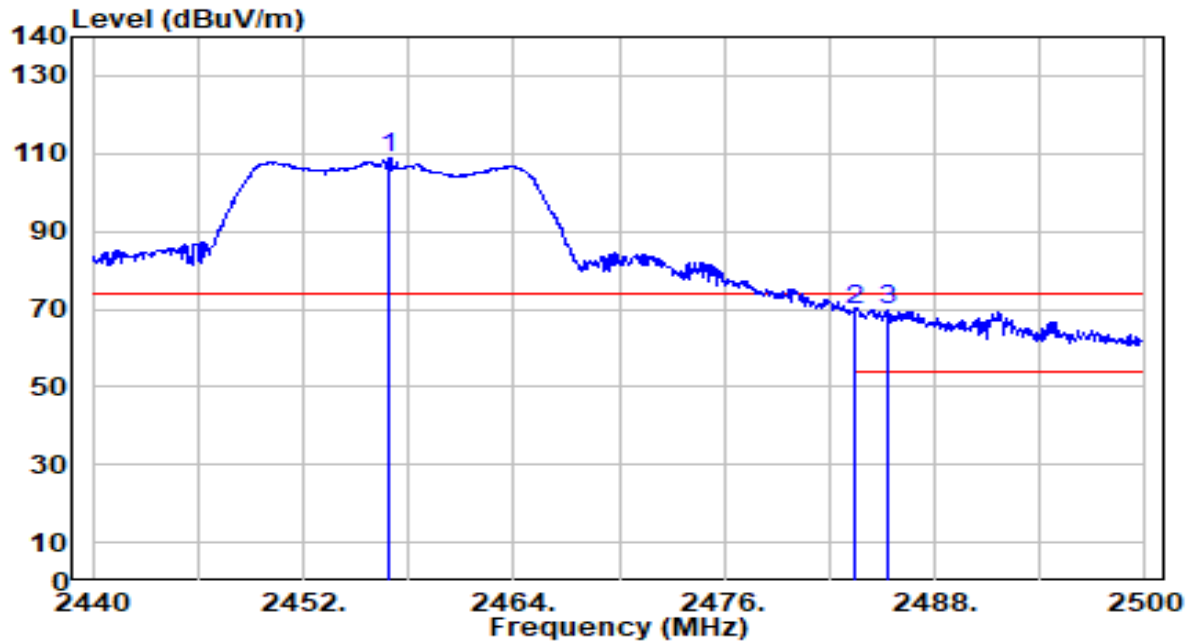


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.920	77.51	31.26	108.77	N/A	N/A	196	360	Peak
2	2483.500	38.35	31.35	69.70	-4.30	74.00	196	360	Peak
3	* 2485.360	38.54	31.36	69.90	-4.10	74.00	196	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 10_Ant 1	Test Voltage	AC 120V/60Hz

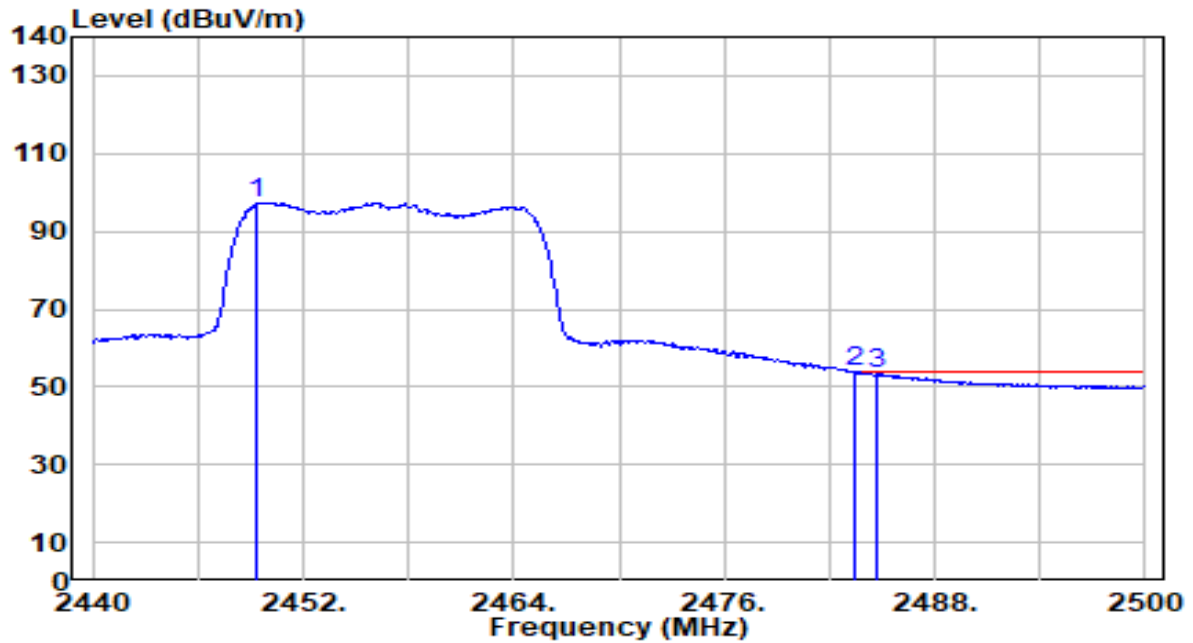


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2449.360	66.21	31.23	97.44	N/A	N/A	196	360	Average
2	*	2483.500	22.52	31.35	53.87	-0.13	54.00	196	360	Average
3		2484.700	21.90	31.36	53.26	-0.74	54.00	196	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 10_Ant 1	Test Voltage	AC 120V/60Hz

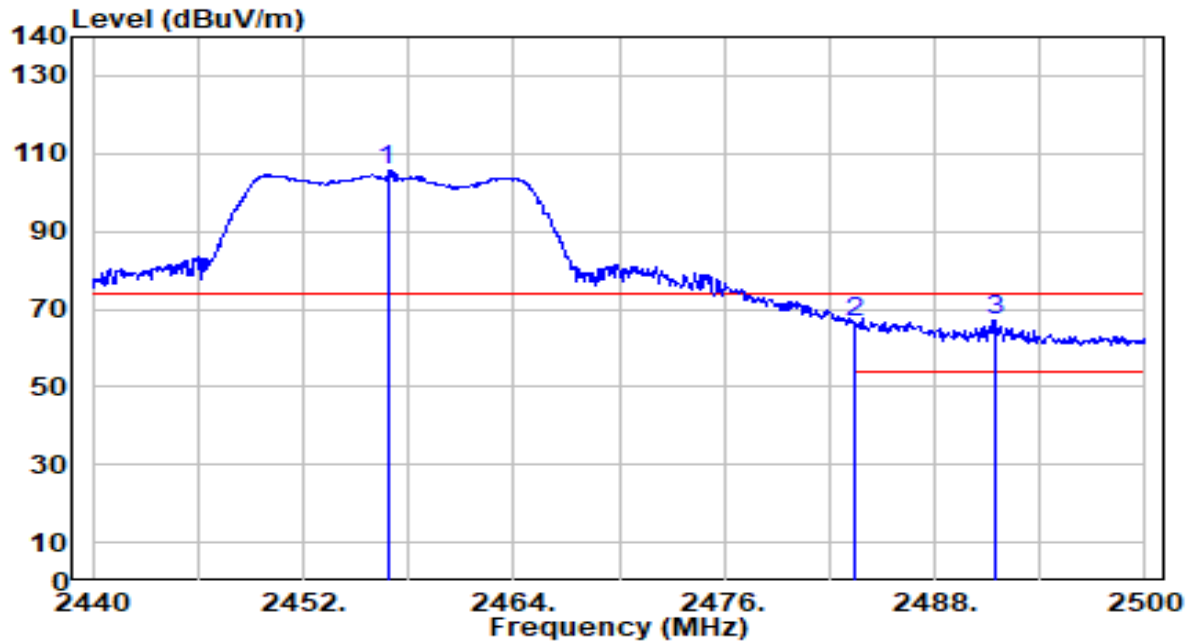


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.800	74.44	31.26	105.70	N/A	N/A	101	54	Peak
2	2483.500	35.39	31.35	66.74	-7.26	74.00	101	54	Peak
3	* 2491.420	35.65	31.38	67.03	-6.97	74.00	101	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 10_Ant 1	Test Voltage	AC 120V/60Hz

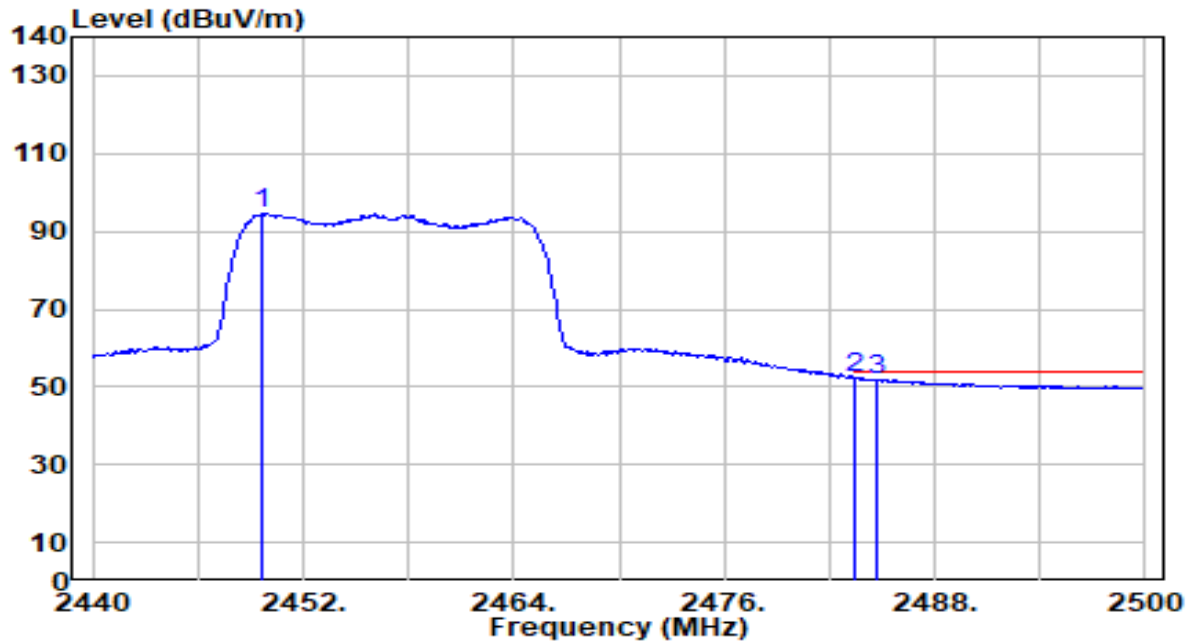


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2449.720	63.16	31.23	94.39	N/A	N/A	101	54	Average
2	*	2483.500	20.83	31.35	52.18	-1.82	54.00	101	54	Average
3		2484.640	20.59	31.36	51.95	-2.05	54.00	101	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

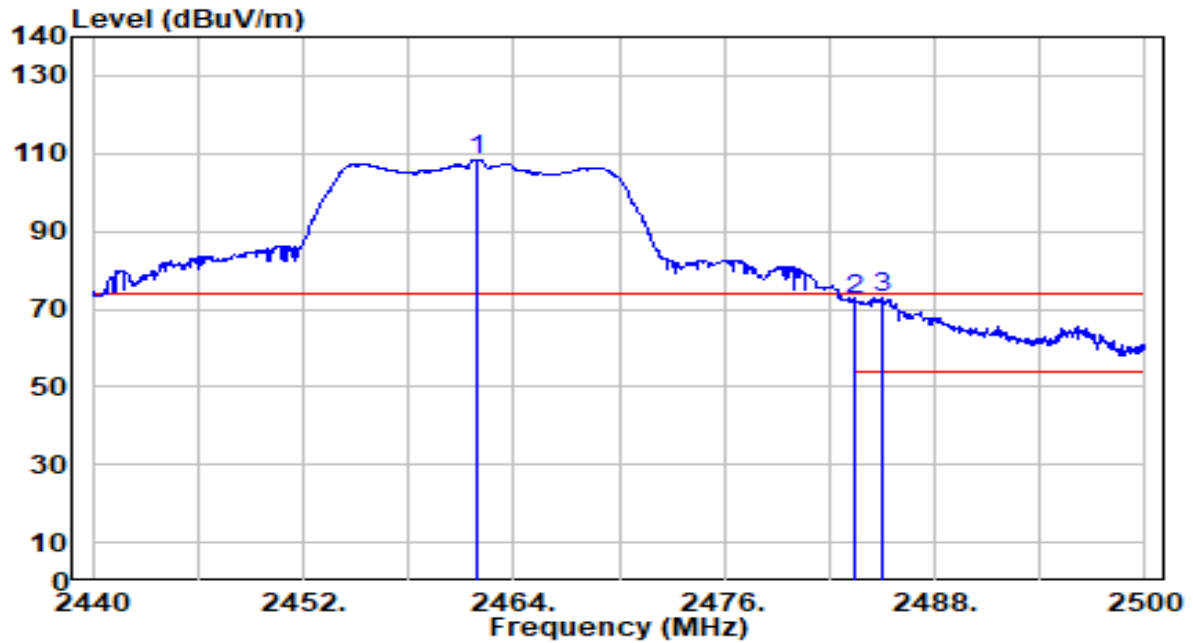


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.900	77.29	31.28	108.56	N/A	N/A	204	29	Peak
2	2483.500	41.04	31.35	72.39	-1.61	74.00	204	29	Peak
3	* 2484.940	41.51	31.36	72.87	-1.13	74.00	204	29	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

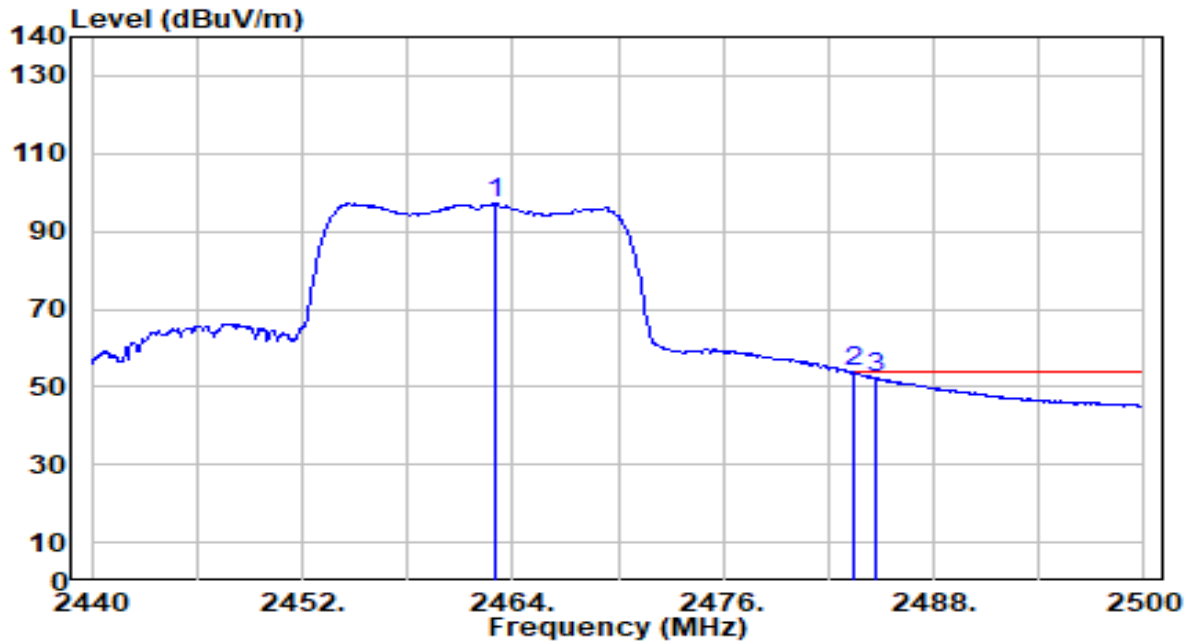


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.980	65.96	31.28	97.24	N/A	N/A	204	29	Average
2	*	2483.500	22.36	31.35	53.71	-0.29	54.00	204	29	Average
3		2484.640	20.82	31.36	52.18	-1.82	54.00	204	29	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

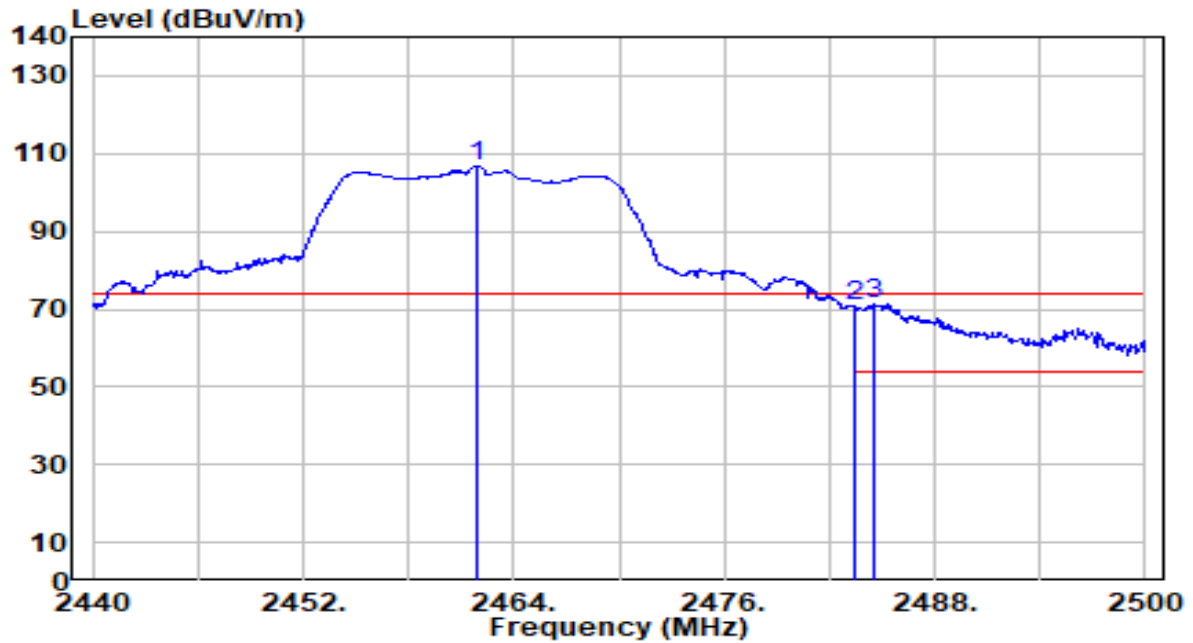


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.900	75.53	31.28	106.81	N/A	N/A	196	103	Peak
2	2483.500	39.30	31.35	70.65	-3.35	74.00	196	103	Peak
3	* 2484.520	40.05	31.36	71.40	-2.60	74.00	196	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-11
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11g_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

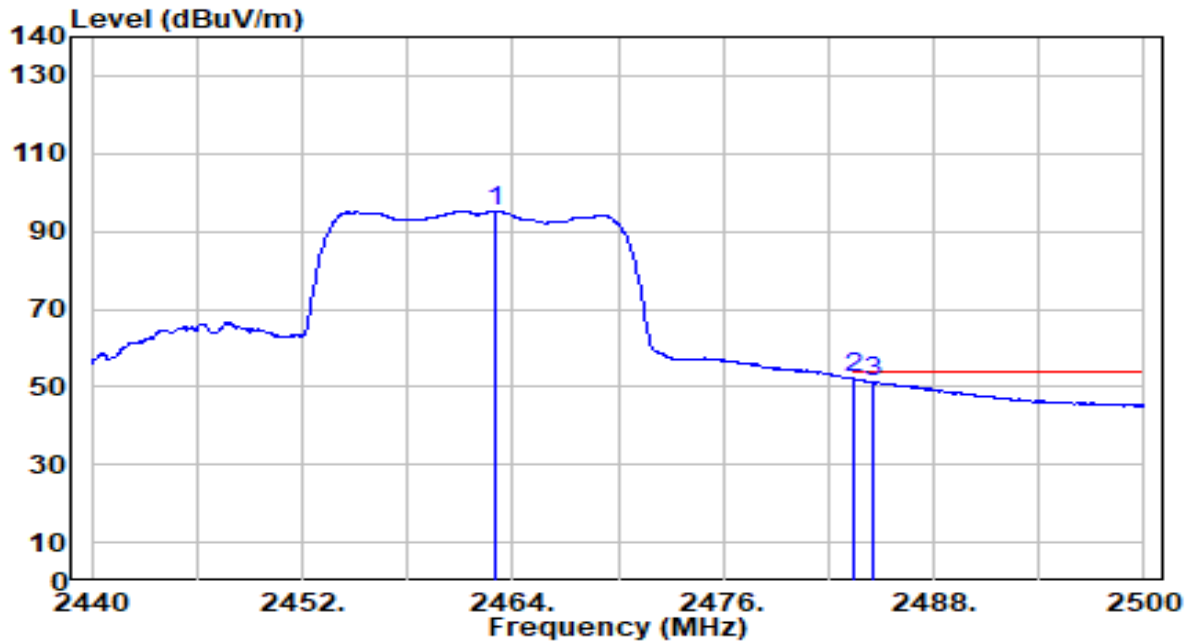


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.040	64.07	31.28	95.35	N/A	N/A	196	103	Average
2	*	2483.500	20.73	31.35	52.08	-1.92	54.00	196	103	Average
3		2484.520	19.88	31.36	51.23	-2.77	54.00	196	103	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

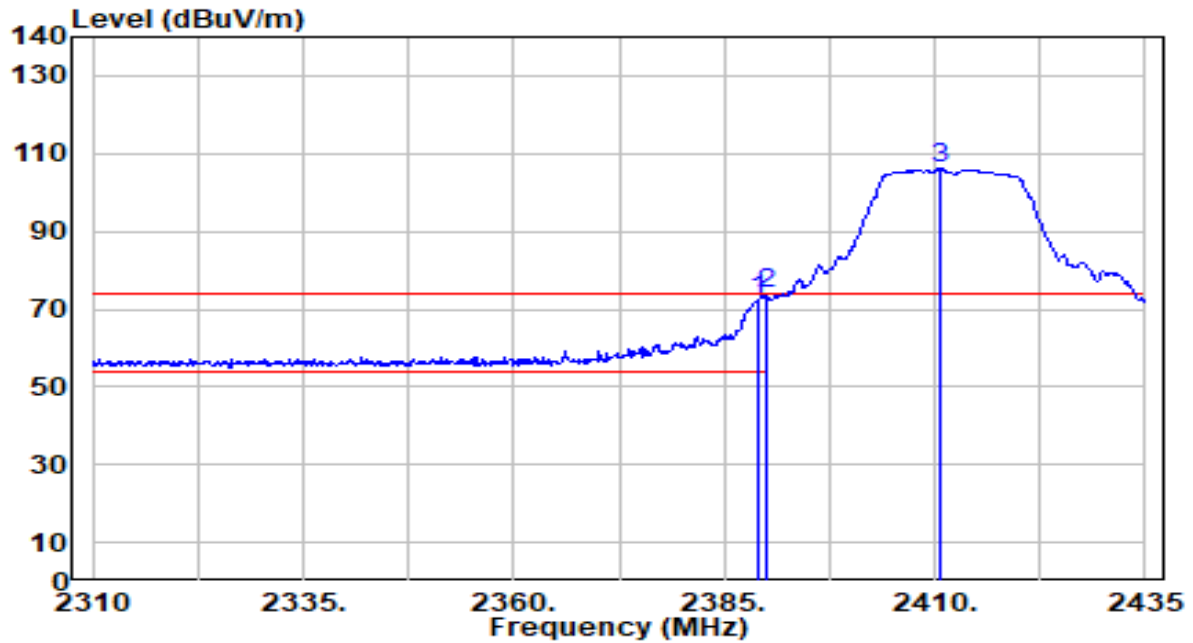


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	41.15	31.03	72.18	-1.82	74.00	196	156	Peak
2	*	2390.000	42.67	31.03	73.70	-0.30	74.00	196	156	Peak
3		2410.625	75.04	31.09	106.13	N/A	N/A	196	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

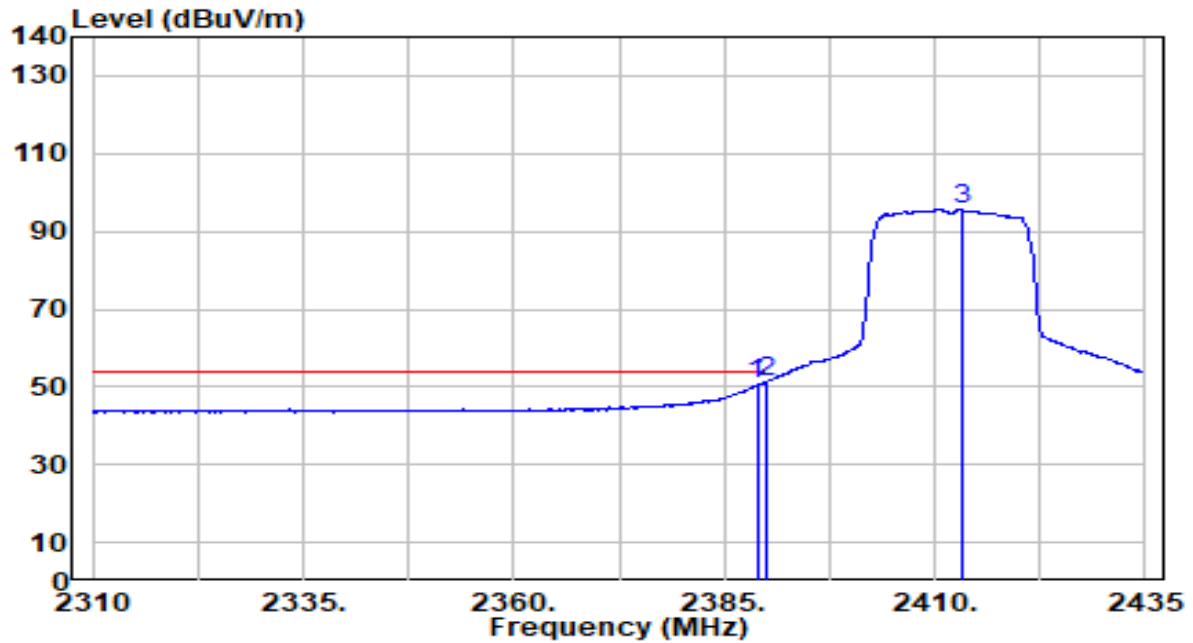


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	19.45	31.03	50.48	-3.52	54.00	196	156	Average
2	*	2390.000	20.08	31.03	51.11	-2.89	54.00	196	156	Average
3		2413.125	64.45	31.10	95.55	N/A	N/A	196	156	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

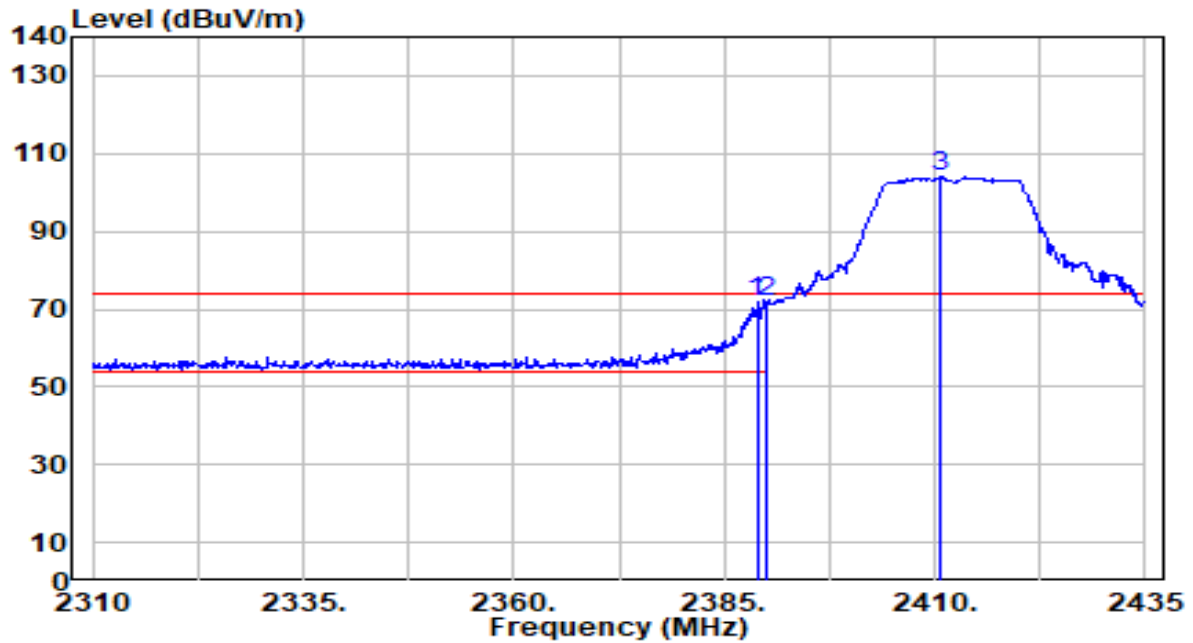


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	40.57	31.03	71.60	-2.40	74.00	278	108	Peak
2	*	2390.000	40.67	31.03	71.70	-2.30	74.00	278	108	Peak
3		2410.500	72.96	31.09	104.06	N/A	N/A	278	108	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 1_Ant 1	Test Voltage	AC 120V/60Hz

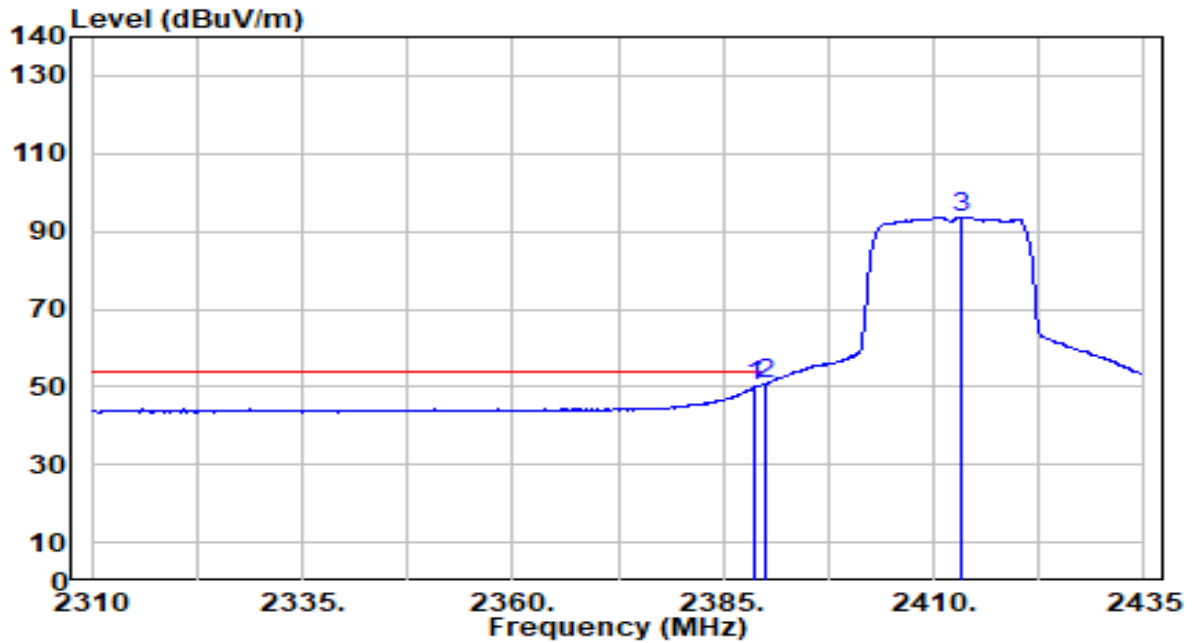


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.750	18.97	31.03	50.00	-4.00	54.00	278	108	Average
2	*	2390.000	19.62	31.03	50.65	-3.35	54.00	278	108	Average
3		2413.125	62.49	31.10	93.59	N/A	N/A	278	108	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 2_Ant 1	Test Voltage	AC 120V/60Hz

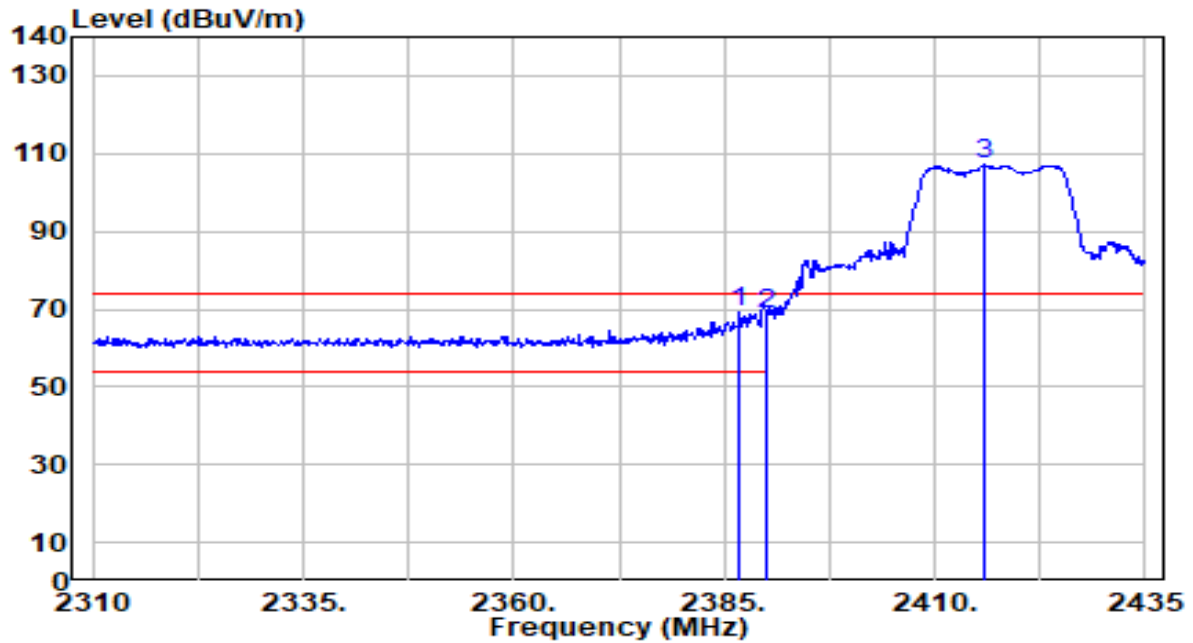


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.750	38.33	31.02	69.36	-4.64	74.00	174	0	Peak
2		2390.000	37.76	31.03	68.79	-5.21	74.00	174	0	Peak
3		2415.875	75.95	31.11	107.06	N/A	N/A	174	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 2_Ant 1	Test Voltage	AC 120V/60Hz

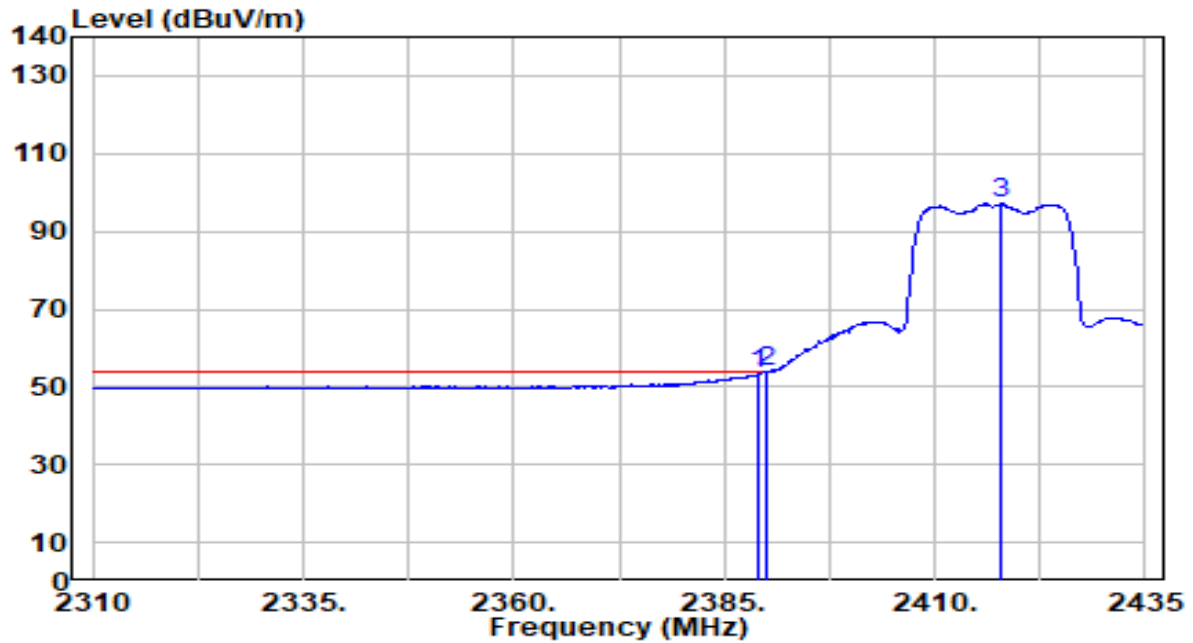


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	22.24	31.03	53.26	-0.74	54.00	174	0	Average
2	*	2390.000	22.82	31.03	53.85	-0.15	54.00	174	0	Average
3		2417.875	65.96	31.12	97.08	N/A	N/A	174	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 2_Ant 1	Test Voltage	AC 120V/60Hz

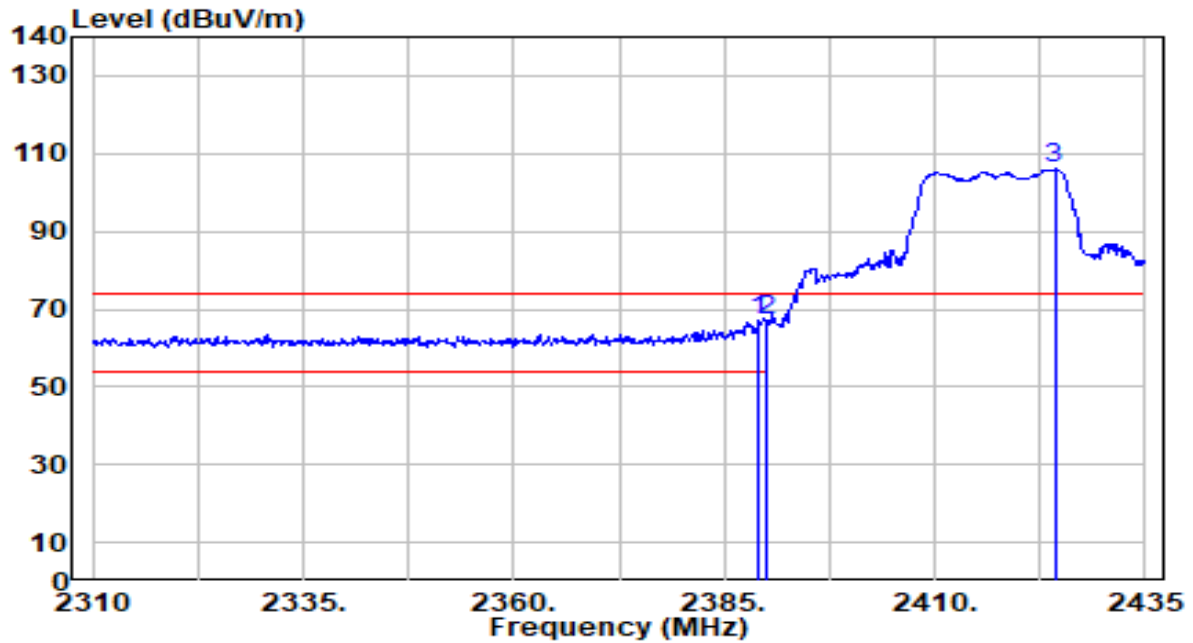


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	35.92	31.03	66.94	-7.06	74.00	277	93	Peak
2	*	2390.000	35.91	31.03	66.94	-7.06	74.00	277	93	Peak
3		2424.250	74.79	31.14	105.93	N/A	N/A	277	93	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 2_Ant 1	Test Voltage	AC 120V/60Hz

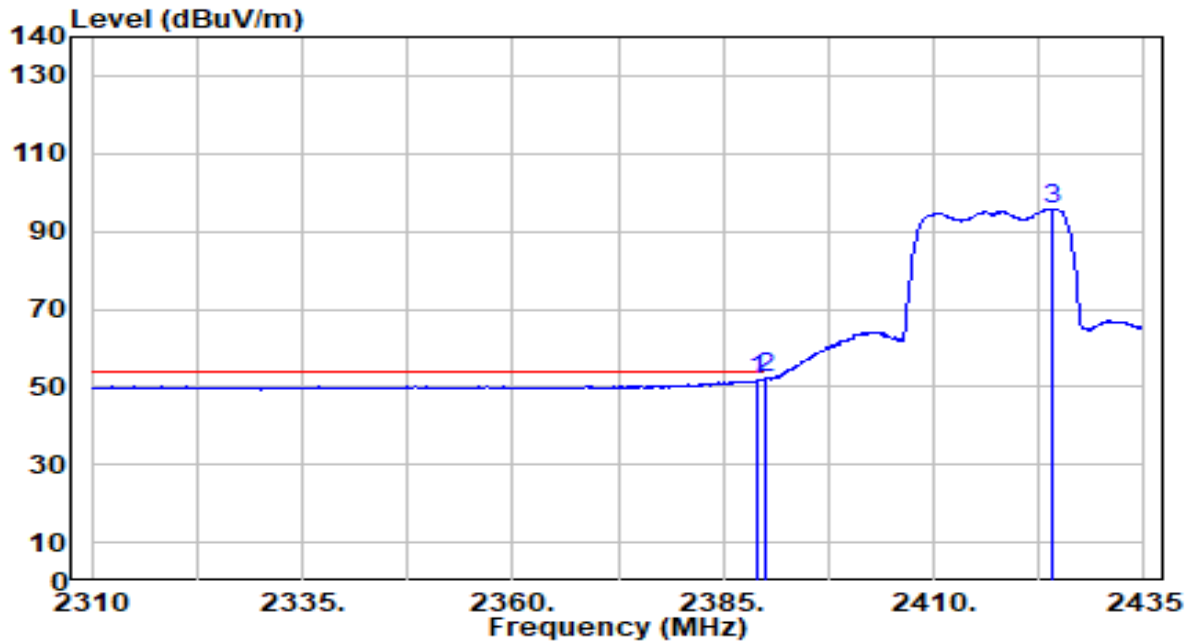


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	20.51	31.03	51.54	-2.46	54.00	277	93	Average
2	*	2390.000	21.05	31.03	52.08	-1.92	54.00	277	93	Average
3		2424.000	64.74	31.14	95.88	N/A	N/A	277	93	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

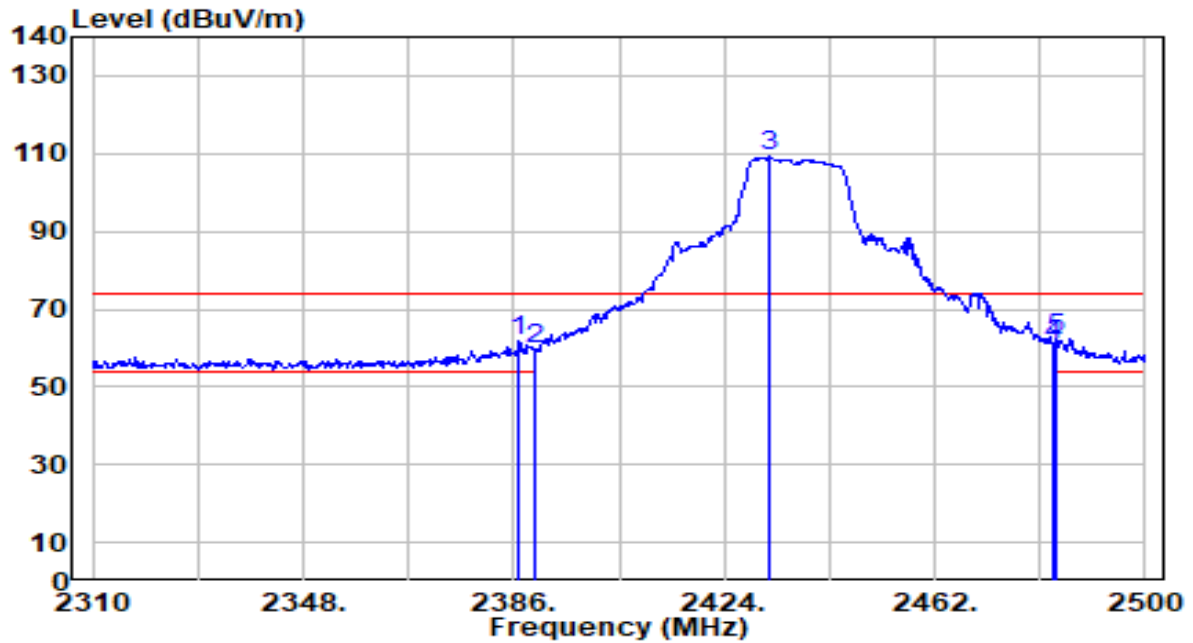


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	30.67	31.02	61.69	-12.31	74.00	223	159	Peak
2	2390.000	28.65	31.03	59.68	-14.32	74.00	223	159	Peak
3	2432.170	78.06	31.17	109.23	N/A	N/A	223	159	Peak
4	2483.500	29.64	31.35	60.99	-13.01	74.00	223	159	Peak
5	* 2484.040	31.22	31.35	62.57	-11.43	74.00	223	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

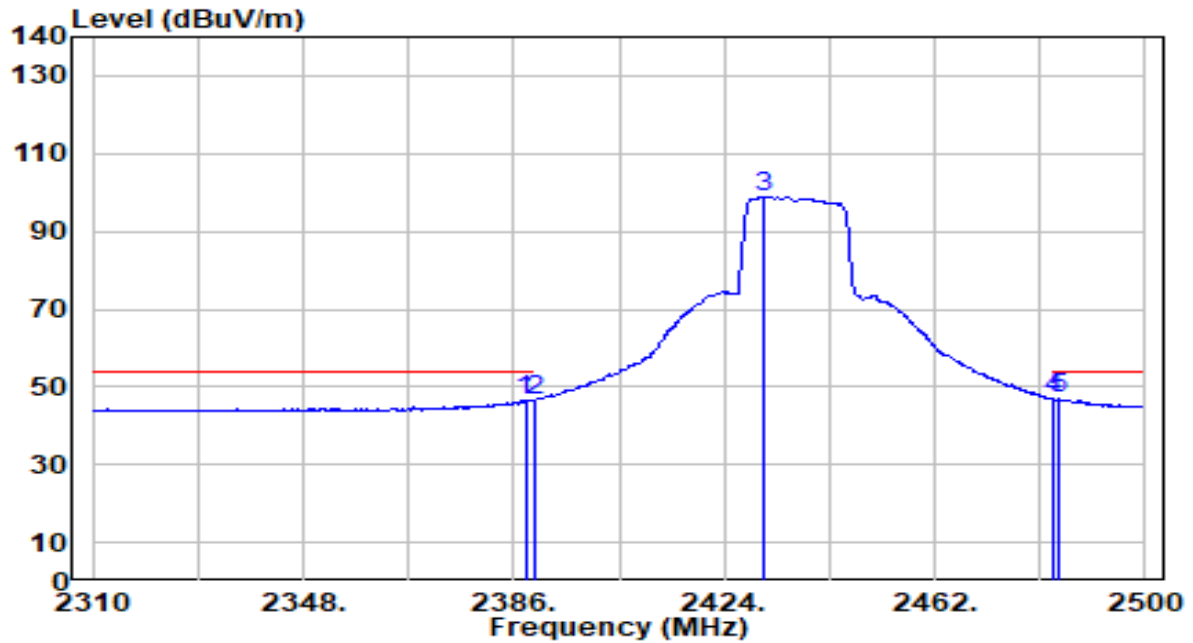


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.090	15.44	31.03	46.47	-7.53	54.00	223	159	Average
2	2390.000	15.64	31.03	46.67	-7.33	54.00	223	159	Average
3	2431.220	67.70	31.17	98.86	N/A	N/A	223	159	Average
4	* 2483.500	15.57	31.35	46.92	-7.08	54.00	223	159	Average
5	2484.420	15.43	31.35	46.78	-7.22	54.00	223	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

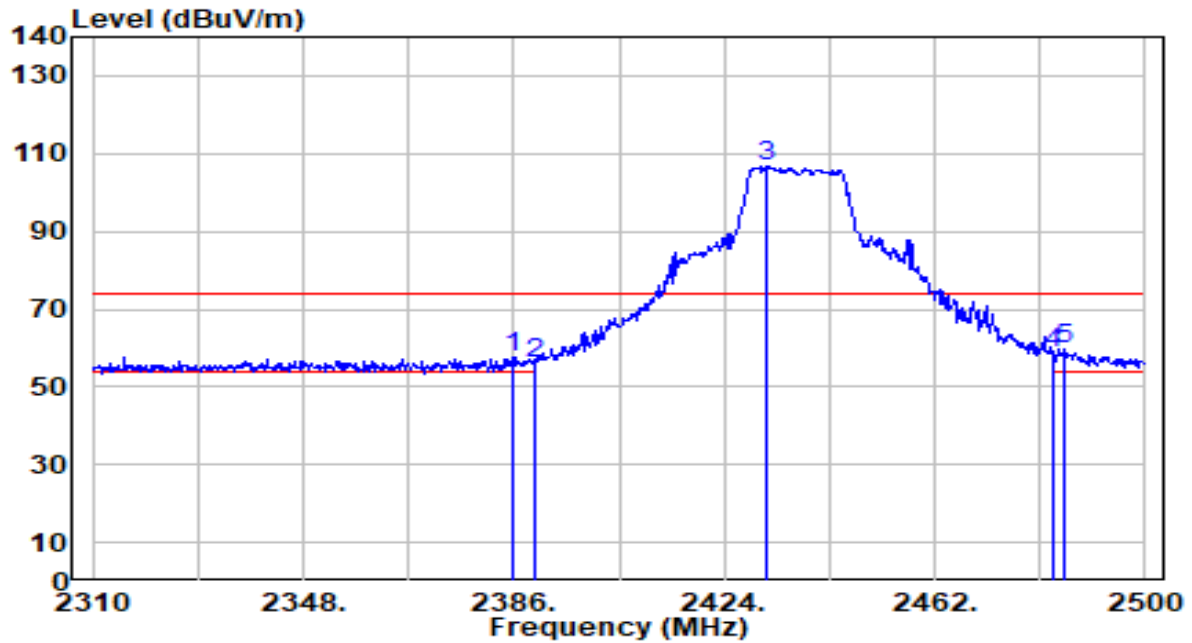


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	26.75	31.02	57.78	-16.22	74.00	224	66	Peak
2	2390.000	24.84	31.03	55.87	-18.13	74.00	224	66	Peak
3	2431.790	75.59	31.17	106.76	N/A	N/A	224	66	Peak
4	2483.500	27.05	31.35	58.40	-15.60	74.00	224	66	Peak
5	* 2485.560	28.21	31.36	59.57	-14.43	74.00	224	66	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 6_Ant 1	Test Voltage	AC 120V/60Hz

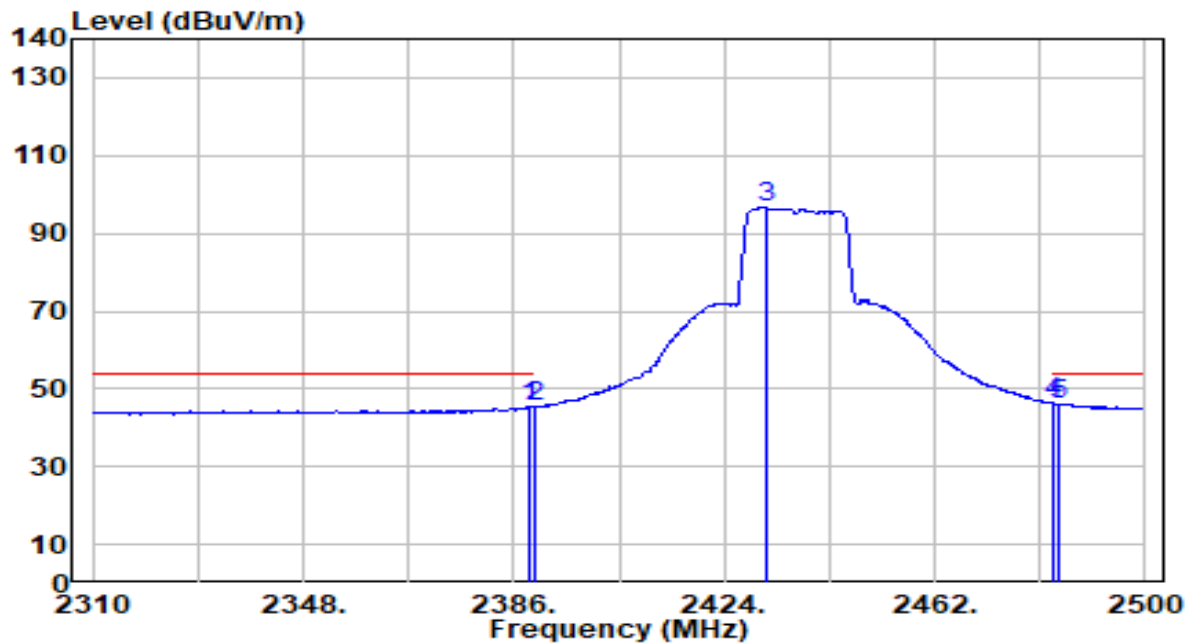


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	14.59	31.03	45.61	-8.39	54.00	224	66	Average
2	2390.000	14.30	31.03	45.33	-8.67	54.00	224	66	Average
3	2431.410	65.40	31.17	96.57	N/A	N/A	224	66	Average
4	* 2483.500	15.07	31.35	46.42	-7.58	54.00	224	66	Average
5	2484.230	14.86	31.35	46.21	-7.79	54.00	224	66	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 9_Ant 1	Test Voltage	AC 120V/60Hz

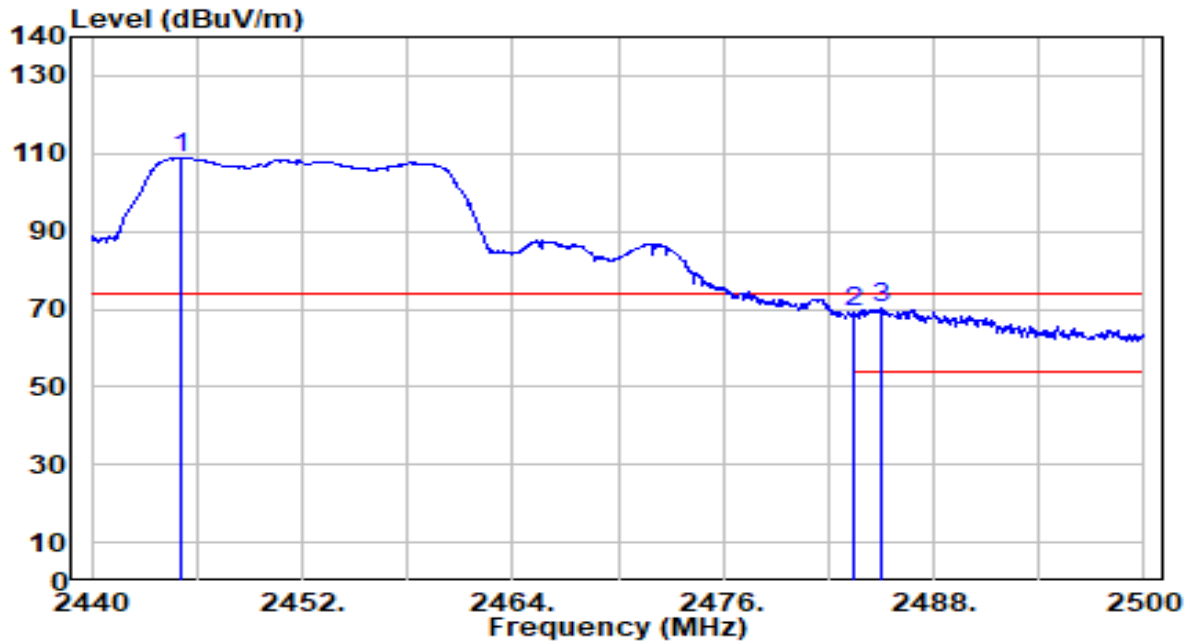


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.100	77.83	31.22	109.04	N/A	N/A	196	360	Peak
2	2483.500	37.63	31.35	68.98	-5.02	74.00	196	360	Peak
3	* 2485.000	39.14	31.36	70.50	-3.50	74.00	196	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 9_Ant 1	Test Voltage	AC 120V/60Hz

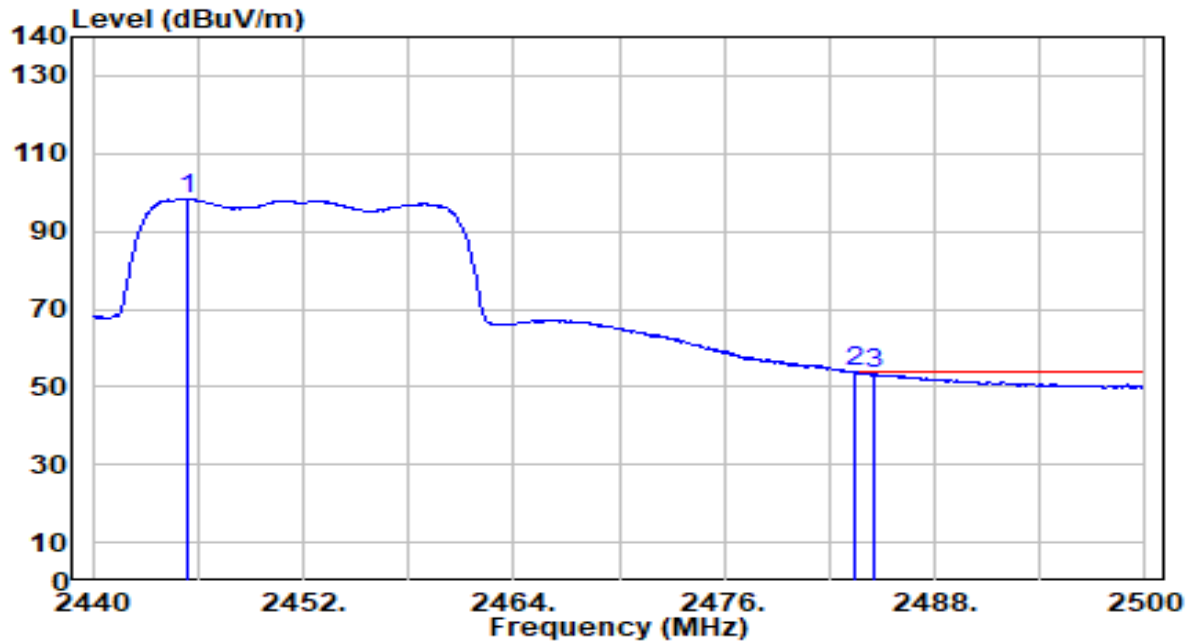


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2445.400	67.23	31.22	98.44	N/A	N/A	196	360	Average
2	*	2483.500	22.51	31.35	53.86	-0.14	54.00	196	360	Average
3		2484.520	21.91	31.36	53.26	-0.74	54.00	196	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 9_Ant 1	Test Voltage	AC 120V/60Hz

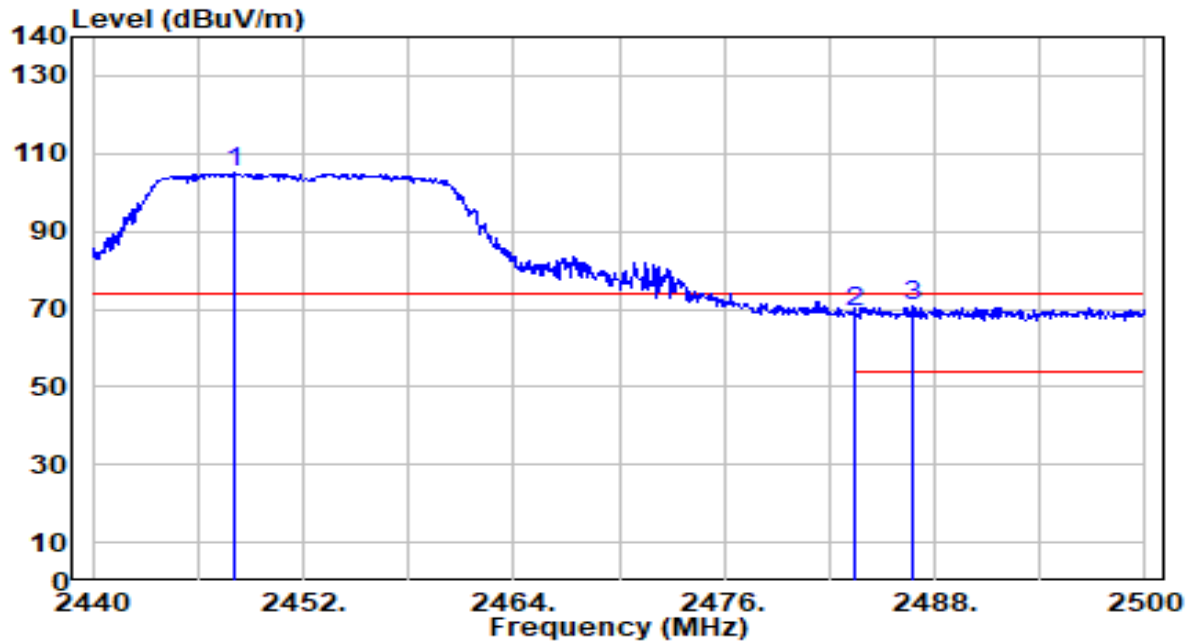


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.100	73.65	31.23	104.87	N/A	N/A	210	125	Peak
2	2483.500	37.83	31.35	69.18	-4.82	74.00	210	125	Peak
3	* 2486.800	39.28	31.36	70.65	-3.35	74.00	210	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 9_Ant 1	Test Voltage	AC 120V/60Hz

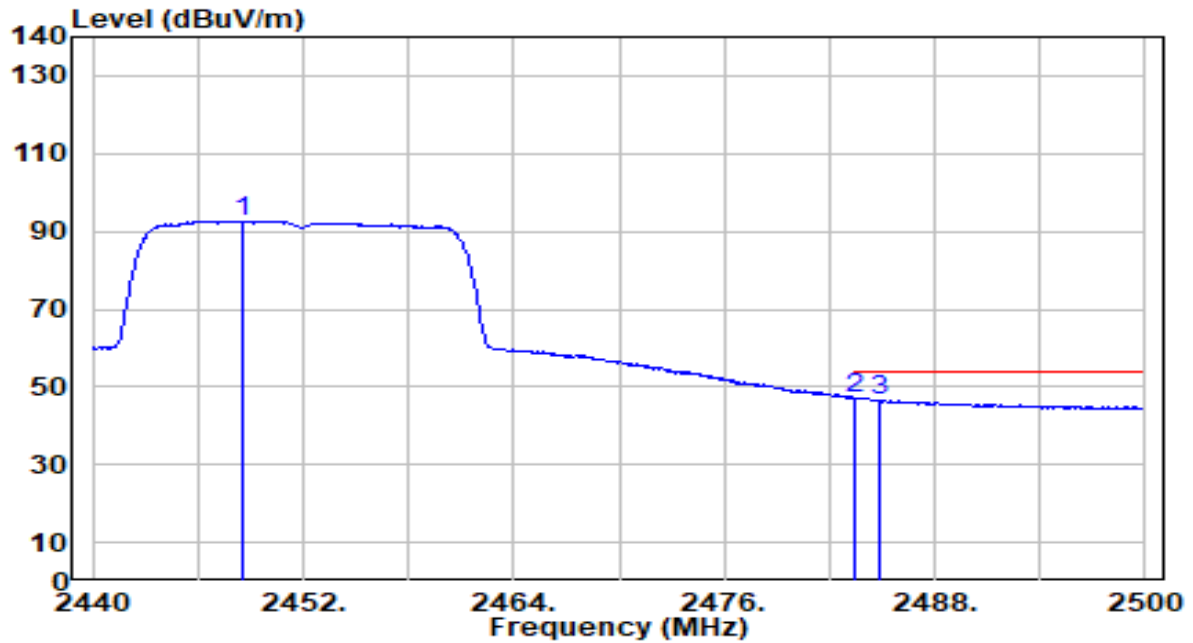


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2448.520	61.27	31.23	92.49	N/A	N/A	210	125	Average
2	*	2483.500	15.70	31.35	47.05	-6.95	54.00	210	125	Average
3		2484.820	15.39	31.36	46.75	-7.25	54.00	210	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 10_Ant 1	Test Voltage	AC 120V/60Hz

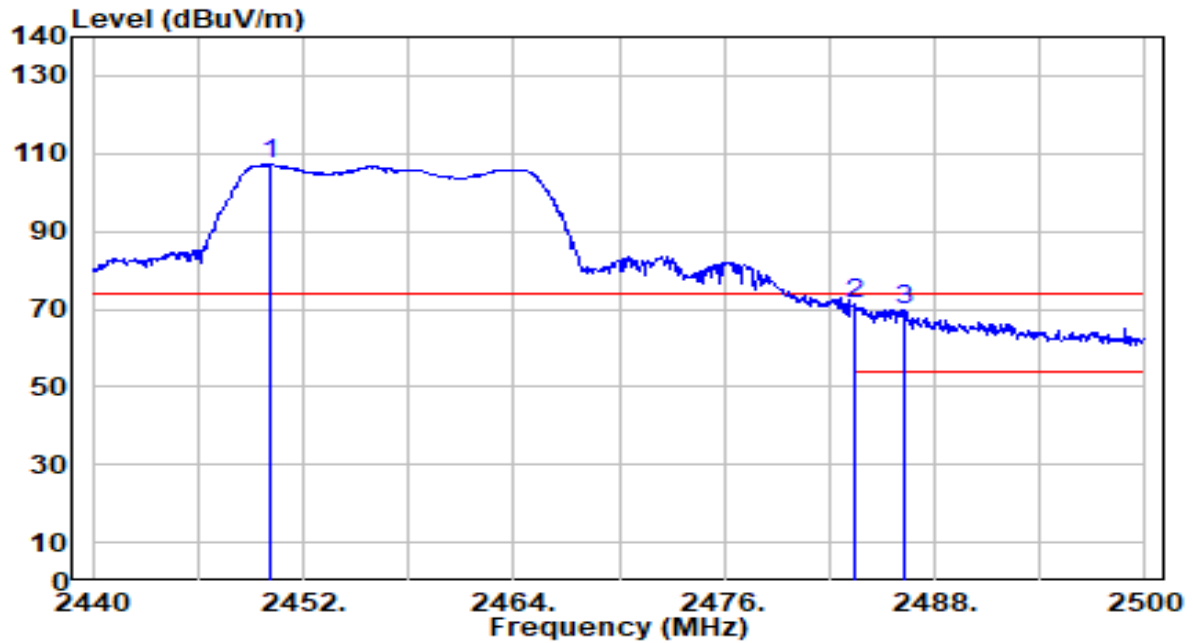


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2450.080	76.00	31.23	107.24	N/A	N/A	196	0	Peak
2	*	2483.500	39.91	31.35	71.26	-2.74	74.00	196	0	Peak
3		2486.260	38.51	31.36	69.87	-4.13	74.00	196	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 10_Ant 1	Test Voltage	AC 120V/60Hz

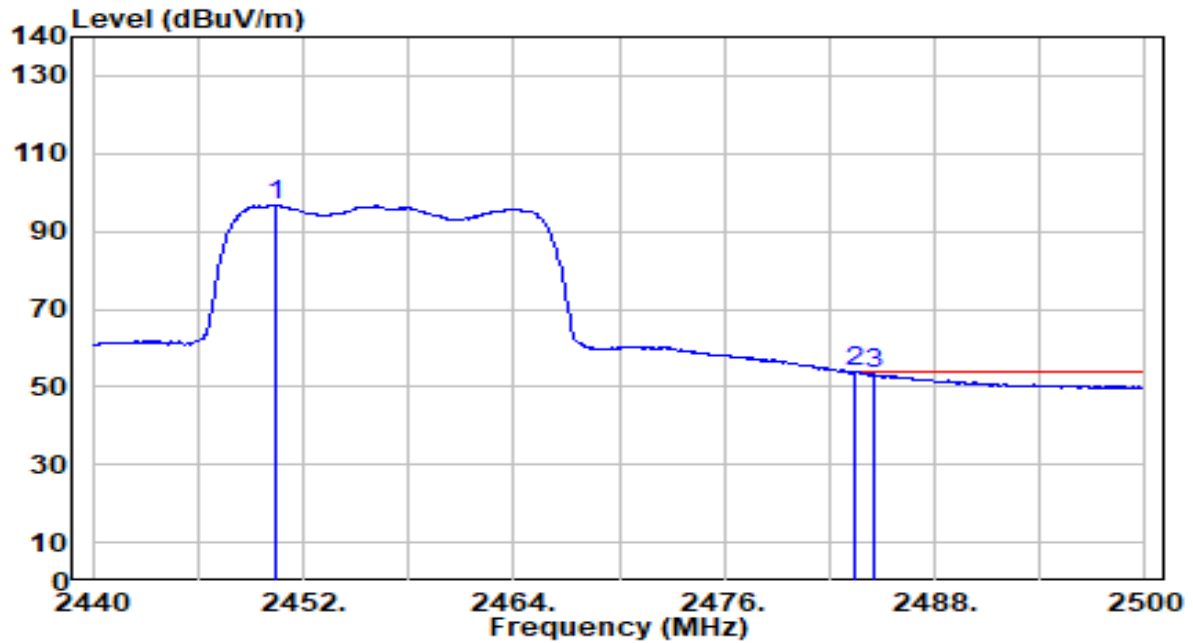


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2450.440	65.42	31.23	96.65	N/A	N/A	196	0	Average
2	*	2483.500	22.40	31.35	53.75	-0.25	54.00	196	0	Average
3		2484.520	21.84	31.36	53.19	-0.81	54.00	196	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 10_Ant 1	Test Voltage	AC 120V/60Hz

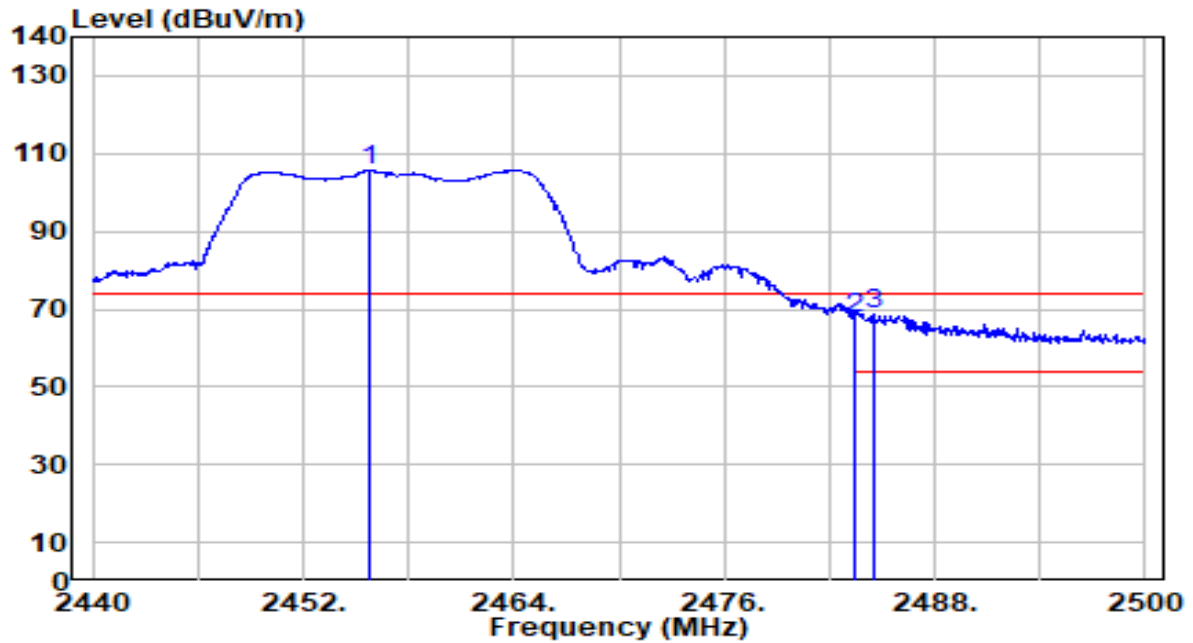


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.720	74.47	31.25	105.73	N/A	N/A	263	86	Peak
2	2483.500	36.31	31.35	67.67	-6.33	74.00	263	86	Peak
3	* 2484.520	37.13	31.36	68.48	-5.52	74.00	263	86	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 10_Ant 1	Test Voltage	AC 120V/60Hz

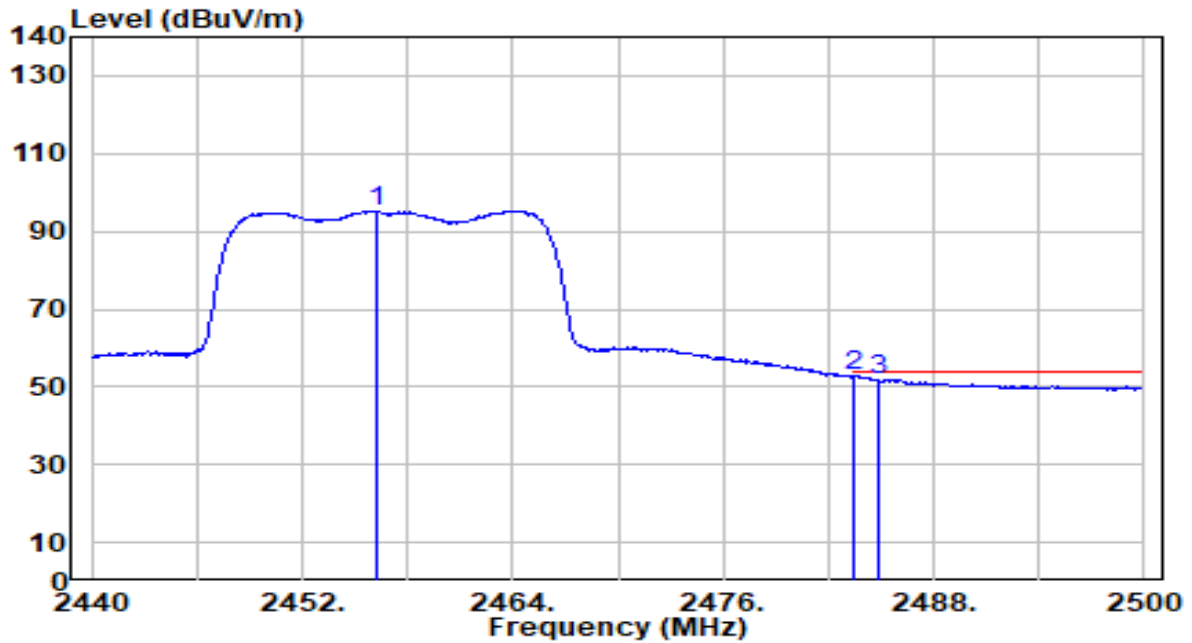


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.200	64.00	31.25	95.25	N/A	N/A	263	86	Average
2	*	2483.500	21.22	31.35	52.57	-1.43	54.00	263	86	Average
3		2484.820	20.58	31.36	51.94	-2.06	54.00	263	86	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

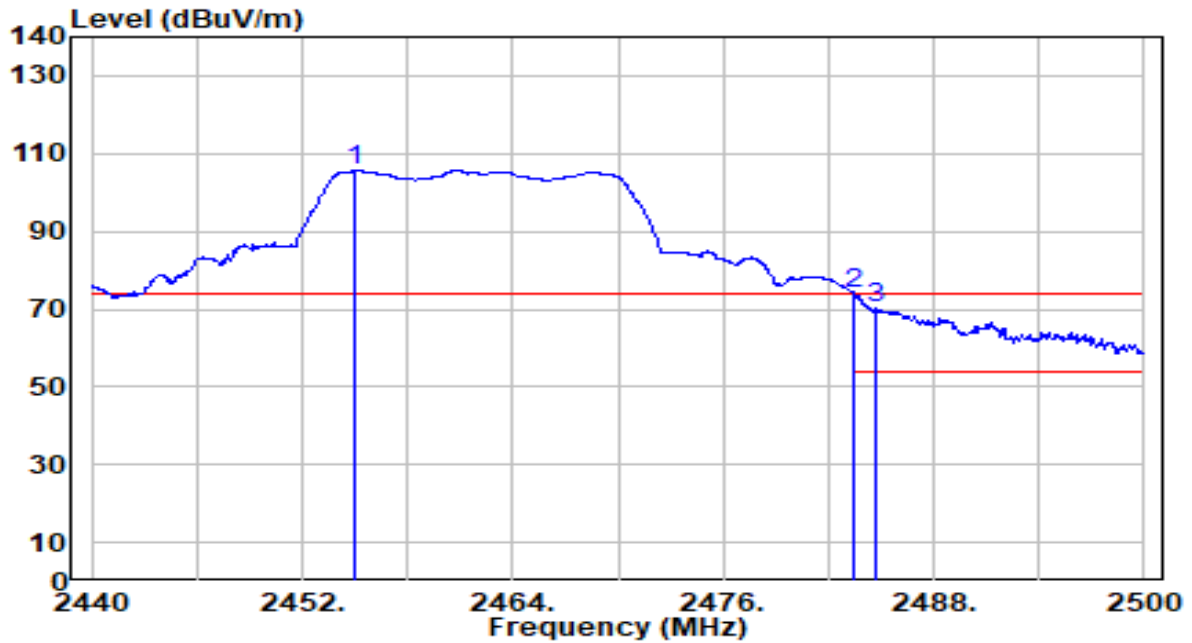


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.060	74.47	31.25	105.72	N/A	N/A	203	326	Peak
2	*	2483.500	42.51	31.35	73.86	-0.14	74.00	203	326	Peak
3		2484.760	38.66	31.36	70.02	-3.98	74.00	203	326	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

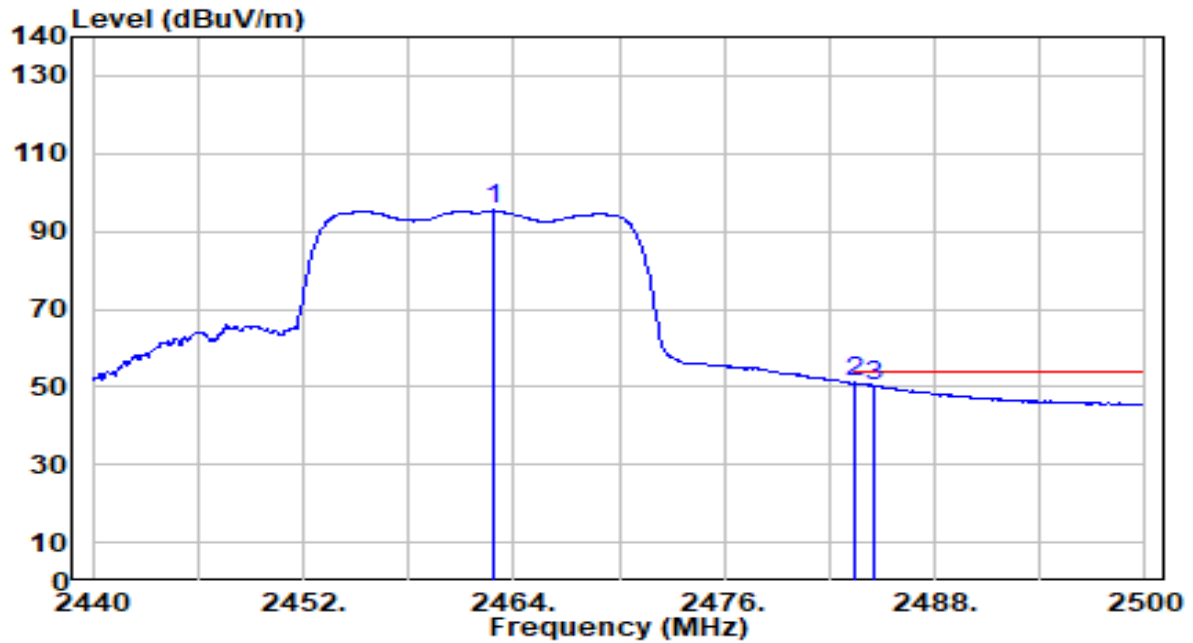


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.800	64.10	31.28	95.38	N/A	N/A	203	326	Average
2	*	2483.500	19.67	31.35	51.02	-2.98	54.00	203	326	Average
3		2484.520	18.93	31.36	50.28	-3.72	54.00	203	326	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

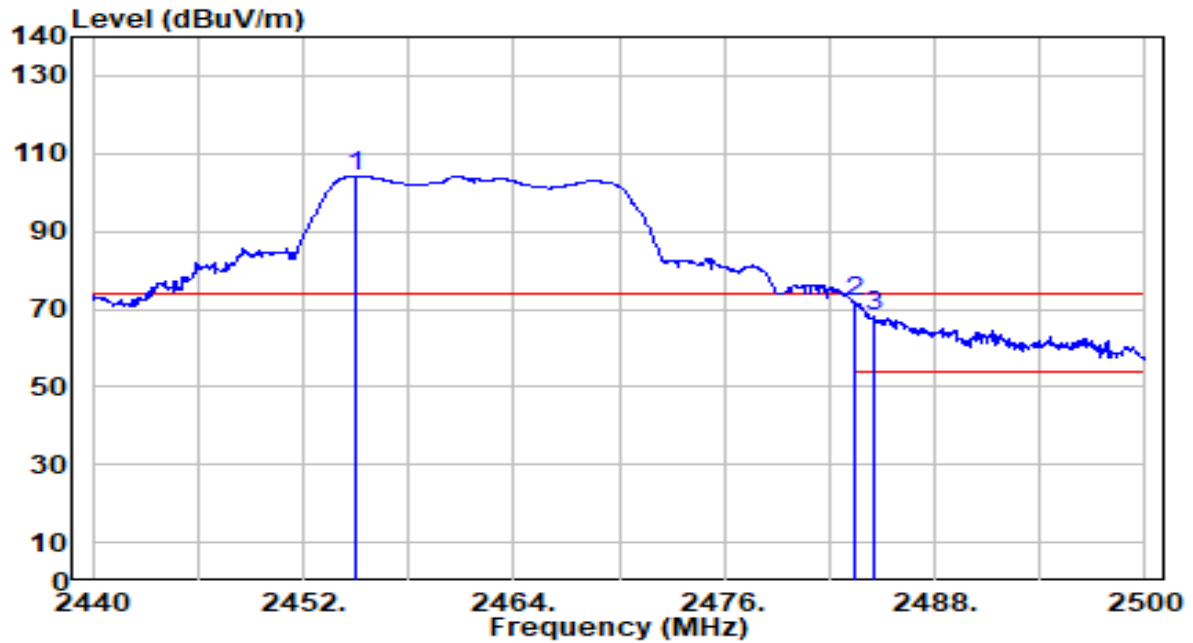


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.060	73.05	31.25	104.30	N/A	N/A	208	262	Peak
2	*	2483.500	40.30	31.35	71.65	-2.35	74.00	208	262	Peak
3		2484.520	36.82	31.36	68.18	-5.82	74.00	208	262	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Video Doorbell Mini	Date of Test	2025-06-19
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-20MHz_TX_CH 11_Ant 1	Test Voltage	AC 120V/60Hz

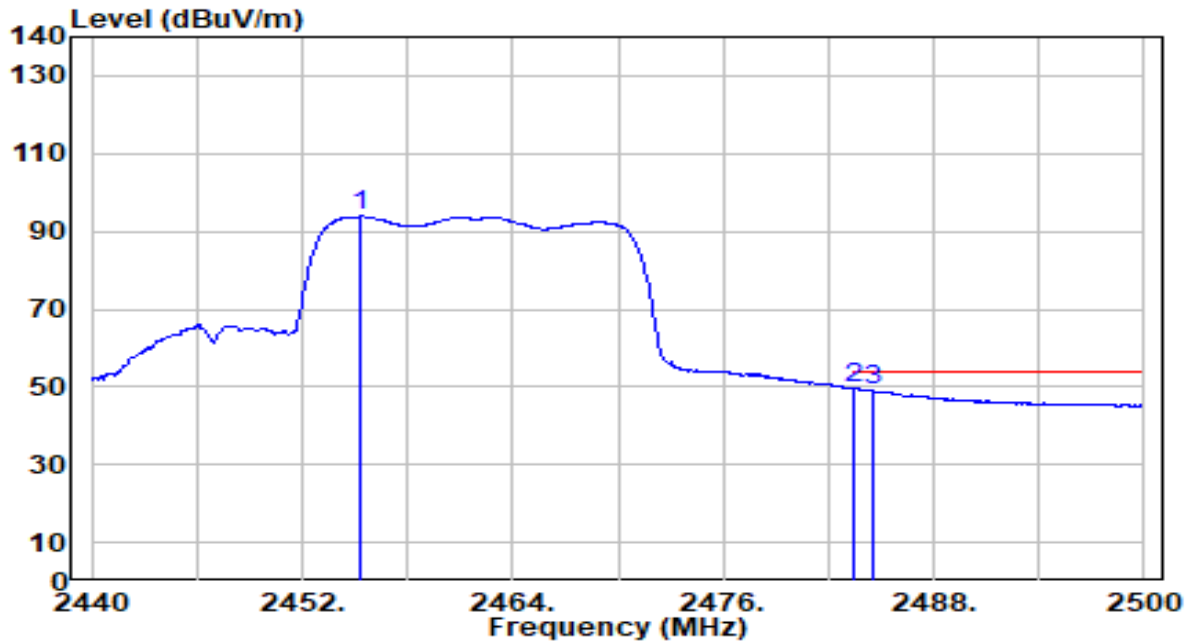

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.360	62.59	31.25	93.84	N/A	N/A	208	262	Average
2	*	2483.500	18.42	31.35	49.77	-4.23	54.00	208	262	Average
3		2484.520	17.65	31.36	49.00	-5.00	54.00	208	262	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

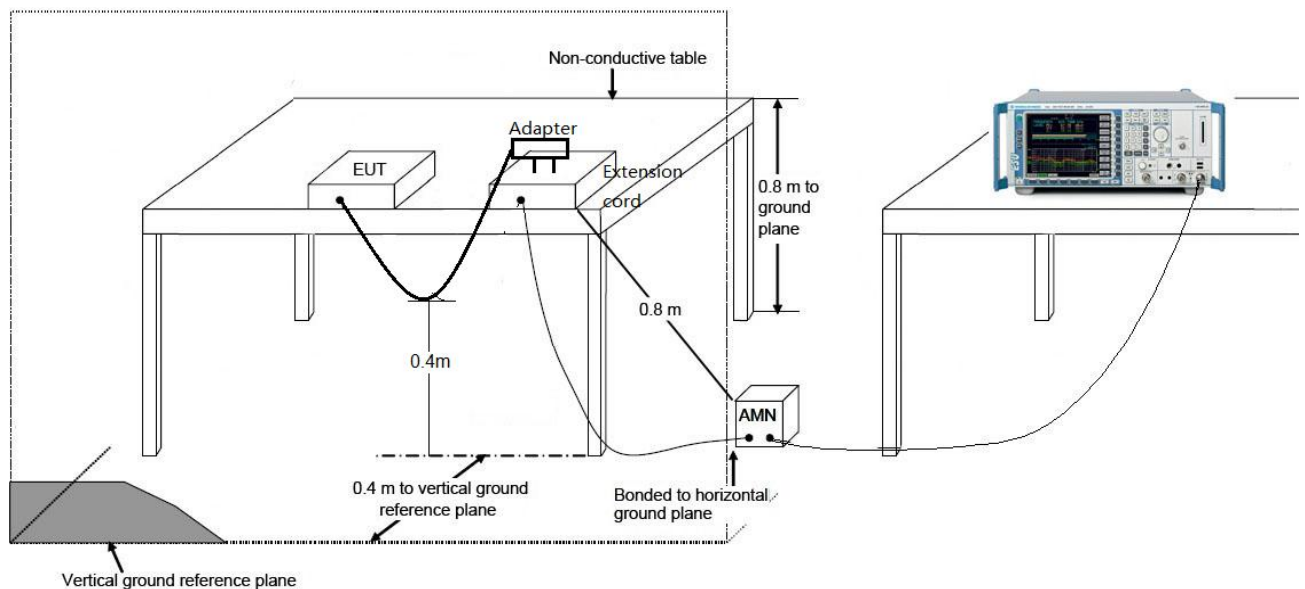

7.8.3.Test Result

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.9°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0	Test Voltage	AC 120V/60Hz

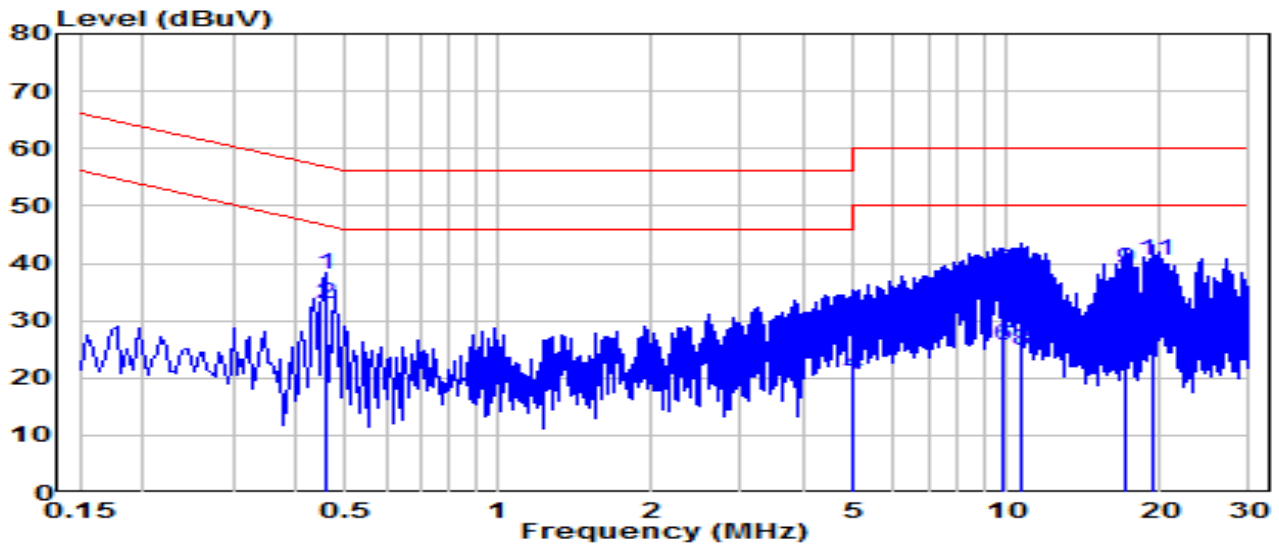


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.456	28.29	9.64	37.93	-18.84	56.77	QP
2	*	0.456	23.27	9.64	32.91	-13.86	46.77	Average
3		5.010	20.39	9.75	30.13	-29.87	60.00	QP
4		5.010	10.89	9.75	20.64	-29.36	50.00	Average
5		9.878	28.70	9.87	38.57	-21.43	60.00	QP
6		9.878	15.78	9.87	25.64	-24.36	50.00	Average
7		10.643	27.49	9.87	37.36	-22.64	60.00	QP
8		10.643	14.99	9.87	24.86	-25.14	50.00	Average
9		17.199	29.03	9.92	38.95	-21.05	60.00	QP
10		17.199	19.87	9.92	29.79	-20.21	50.00	Average
11		19.521	30.55	9.94	40.48	-19.52	60.00	QP
12		19.521	21.64	9.94	31.57	-18.43	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Video Doorbell Mini	Date of Test	2025-06-06
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.9°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0	Test Voltage	AC 120V/60Hz

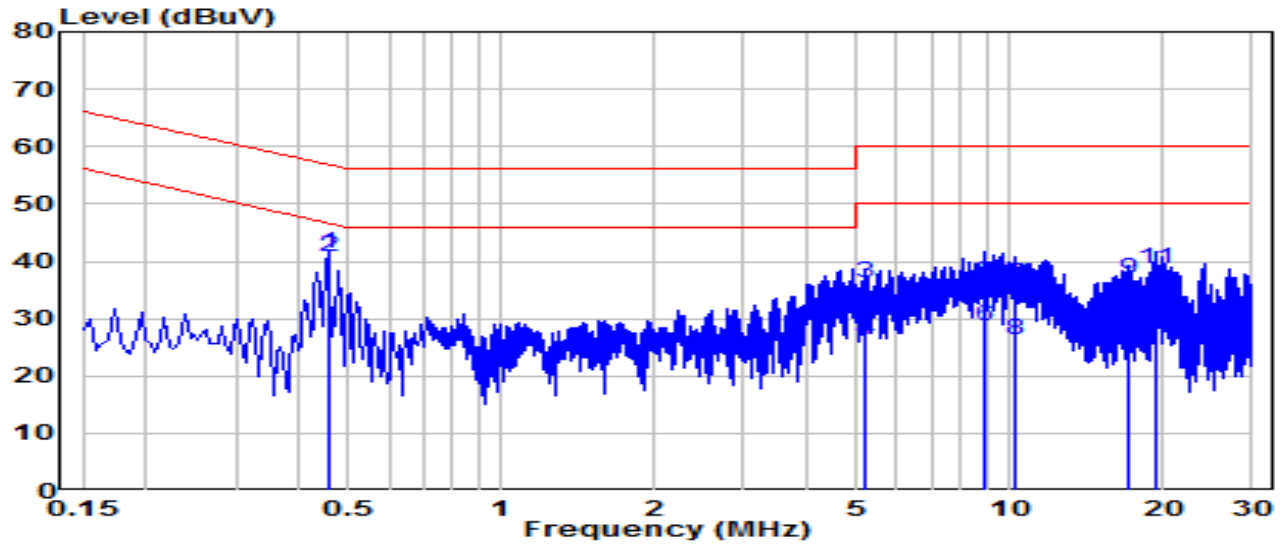

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.456	31.74	9.64	41.37	-15.39	56.77	QP
2	*	0.456	31.14	9.64	40.77	-5.99	46.77	Average
3		5.207	26.58	9.75	36.33	-23.67	60.00	QP
4		5.207	16.66	9.75	26.41	-23.59	50.00	Average
5		8.960	26.52	9.84	36.37	-23.63	60.00	QP
6		8.960	18.95	9.84	28.80	-21.20	50.00	Average
7		10.197	26.10	9.87	35.97	-24.03	60.00	QP
8		10.197	16.54	9.87	26.41	-23.59	50.00	Average
9		17.239	26.85	9.95	36.80	-23.20	60.00	QP
10		17.239	20.55	9.95	30.50	-19.50	50.00	Average
11		19.440	28.77	9.97	38.74	-21.26	60.00	QP
12		19.440	22.76	9.97	32.73	-17.27	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2506TW0101-UT” file.

Appendix B : External Photograph

Refer to “2506TW0101-UE” file.

Appendix C : Internal Photograph

Refer to “2506TW0101-UI” file.

_____ The End _____