



7.6.4. Test Setup

Below 1GHz Test Setup:

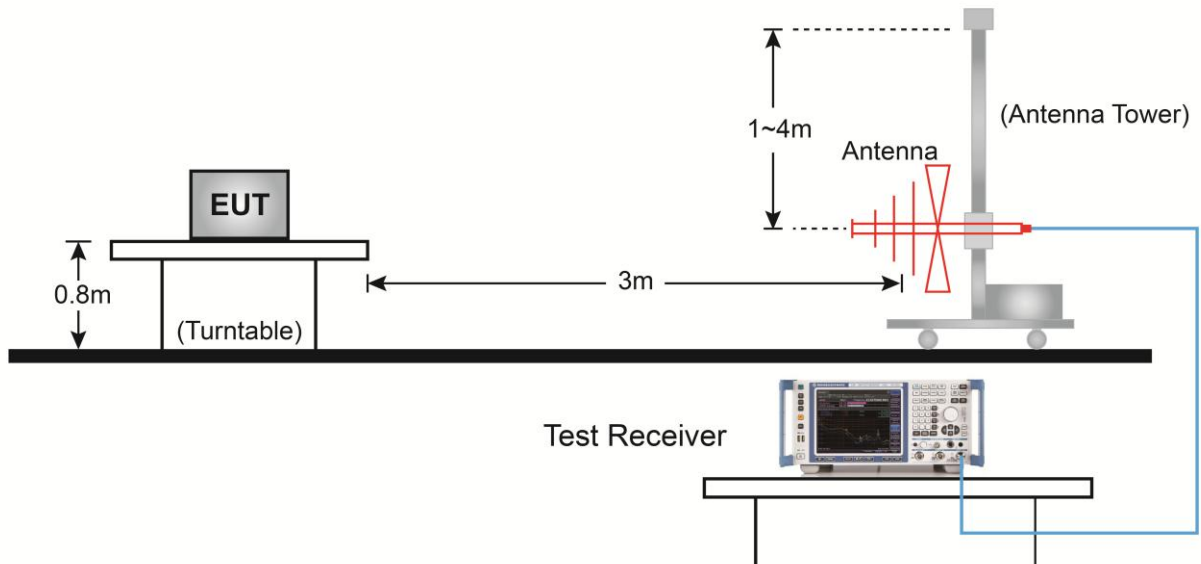


Above 1GHz Test Setup:

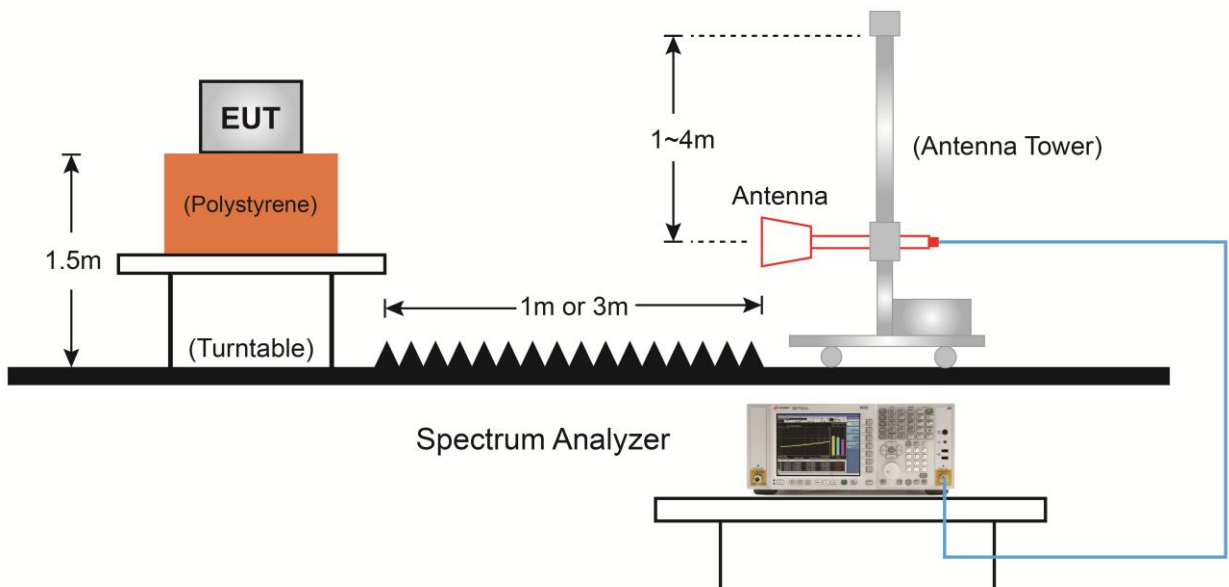

7.6.5. Test Result

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-05-17
Factor	VULB 9162	Temp. / Humidity	22°C /59%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

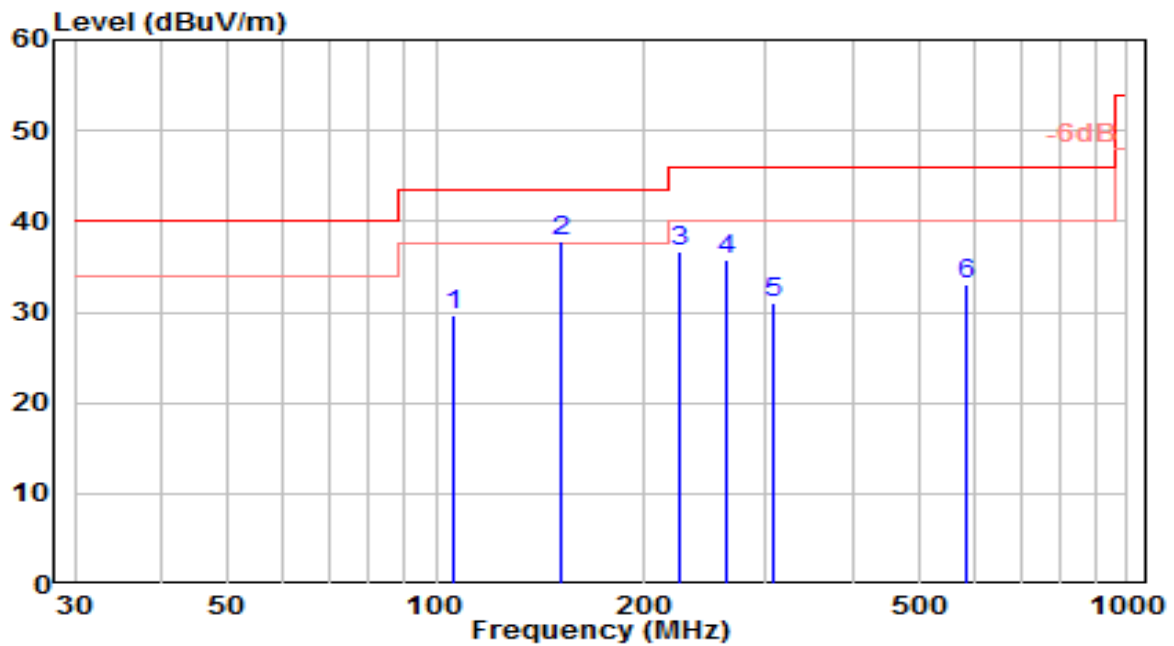


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		105.514	10.81	18.80	29.61	-13.89	43.50	150	95	QP
2	*	151.888	22.08	15.67	37.75	-5.75	43.50	150	90	QP
3		226.066	17.28	19.31	36.60	-9.40	46.00	100	285	QP
4		262.951	15.23	20.53	35.76	-10.24	46.00	100	320	QP
5		307.155	9.53	21.41	30.94	-15.06	46.00	100	315	QP
6		585.139	5.94	27.08	33.02	-12.98	46.00	150	250	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-05-17
Factor	VULB 9162	Temp. / Humidity	22°C /59%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

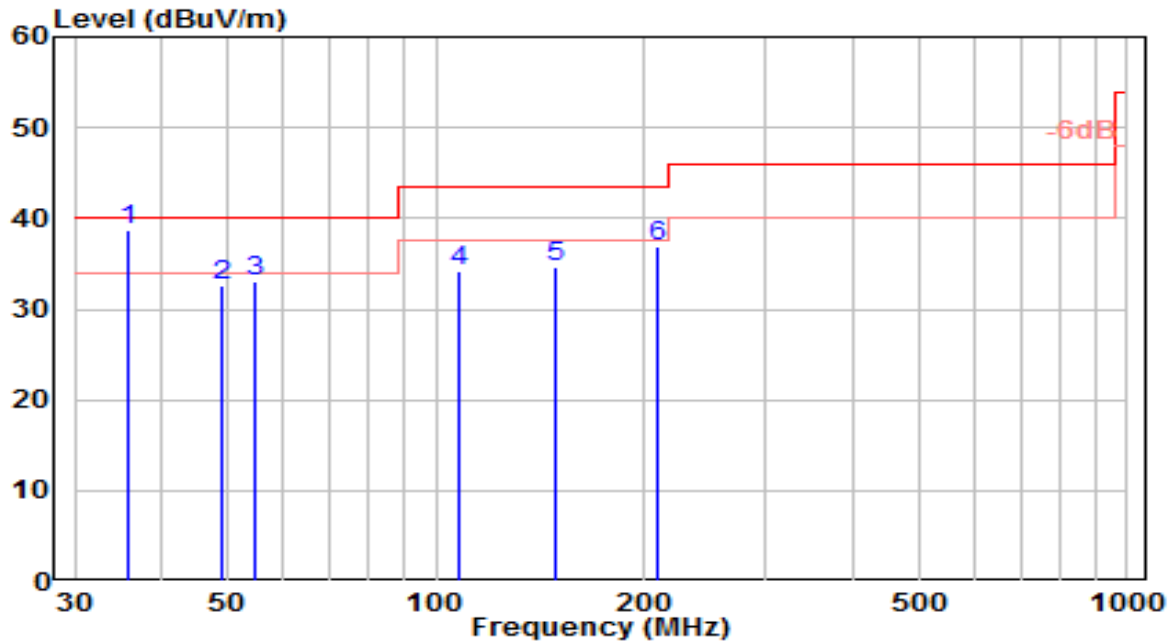


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.708	20.10	18.53	38.63	-1.37	40.00	100	200	QP
2		48.915	11.31	21.19	32.51	-7.49	40.00	100	45	QP
3		54.555	12.34	20.63	32.98	-7.02	40.00	100	335	QP
4		108.118	15.50	18.76	34.26	-9.24	43.50	100	40	QP
5		149.153	18.98	15.56	34.54	-8.96	43.50	100	50	QP
6		209.158	18.67	18.32	36.99	-6.51	43.50	150	360	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

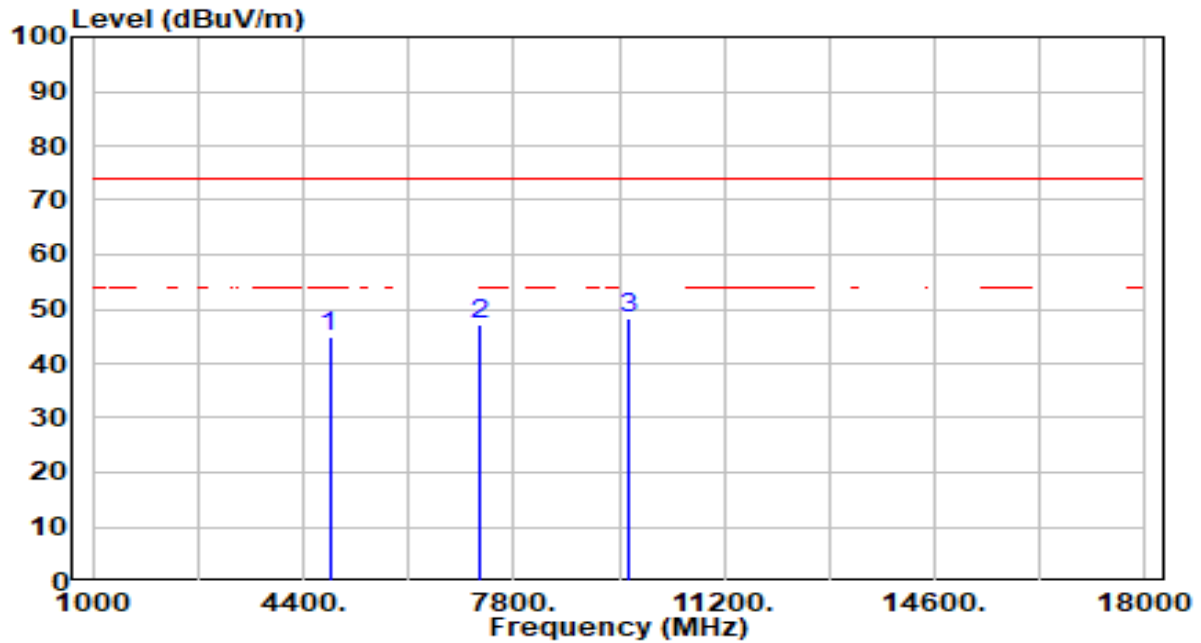


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.49	4.34	44.83	-29.17	74.00	300	248	Peak
2	7236.000	34.31	12.73	47.04	-26.96	74.00	100	266	Peak
3	* 9648.000	31.48	16.74	48.22	-25.78	74.00	263	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

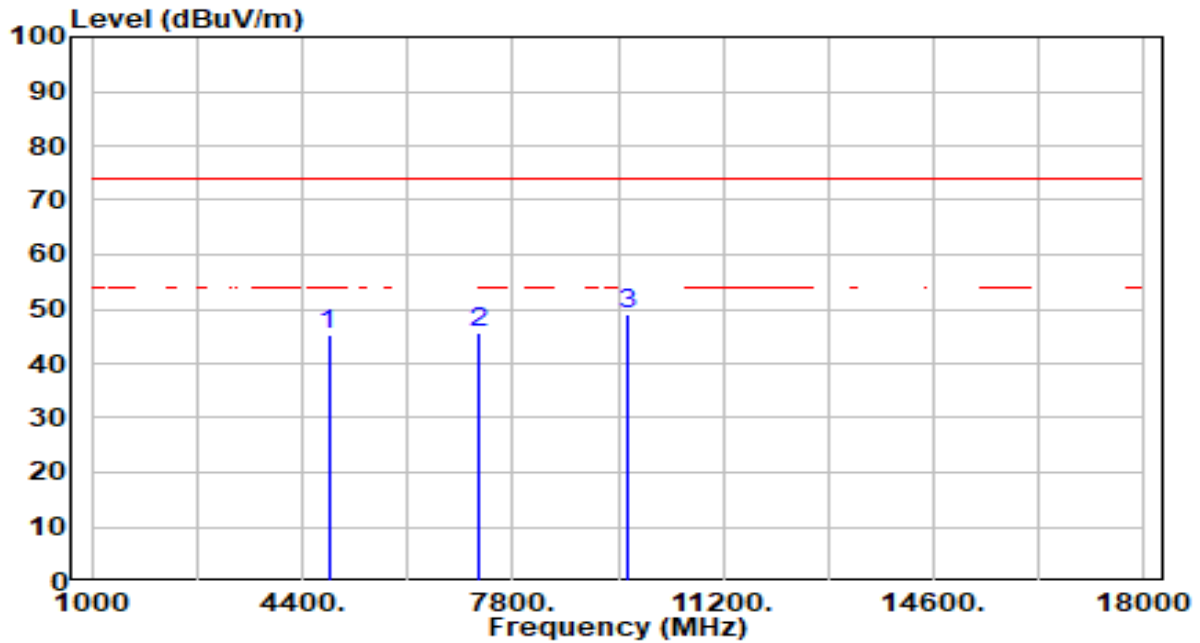


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.97	4.34	45.31	-28.69	74.00	200	187	Peak
2	7236.000	32.89	12.73	45.62	-28.38	74.00	300	195	Peak
3	* 9648.000	32.49	16.74	49.23	-24.77	74.00	100	83	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

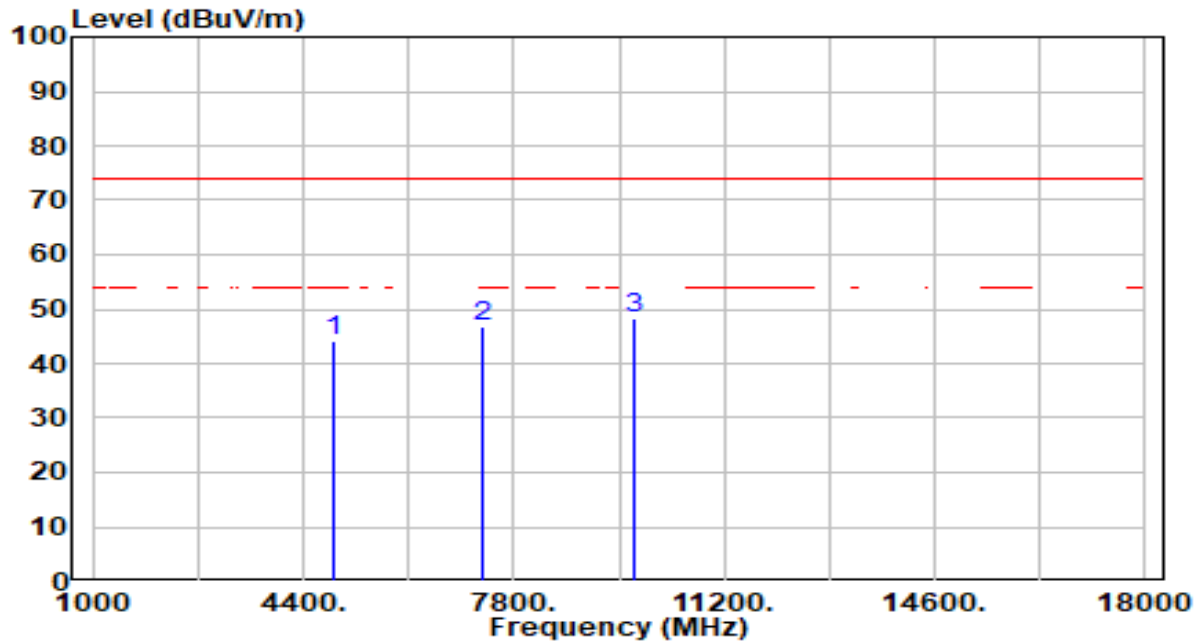


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.62	4.46	44.09	-29.91	74.00	200	124	Peak
2	7311.000	33.70	13.13	46.83	-27.17	74.00	200	295	Peak
3	* 9748.000	31.36	16.92	48.28	-25.72	74.00	200	41	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

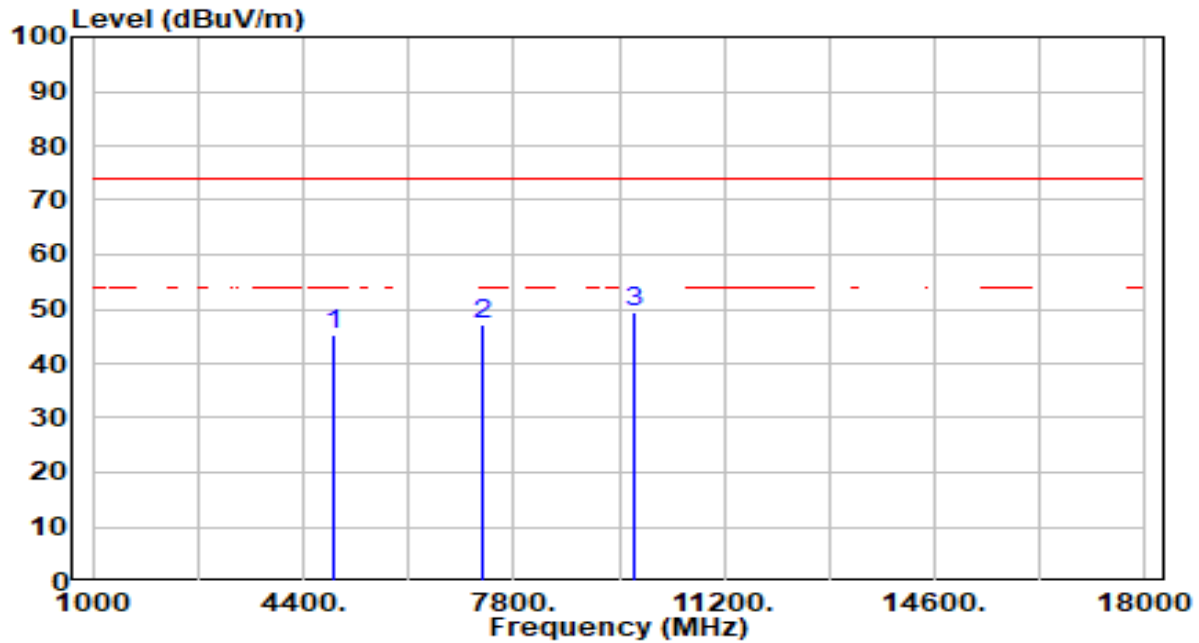


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.82	4.46	45.28	-28.72	74.00	200	188	Peak
2	7311.000	33.98	13.13	47.11	-26.89	74.00	200	247	Peak
3	* 9748.000	32.56	16.92	49.48	-24.52	74.00	200	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

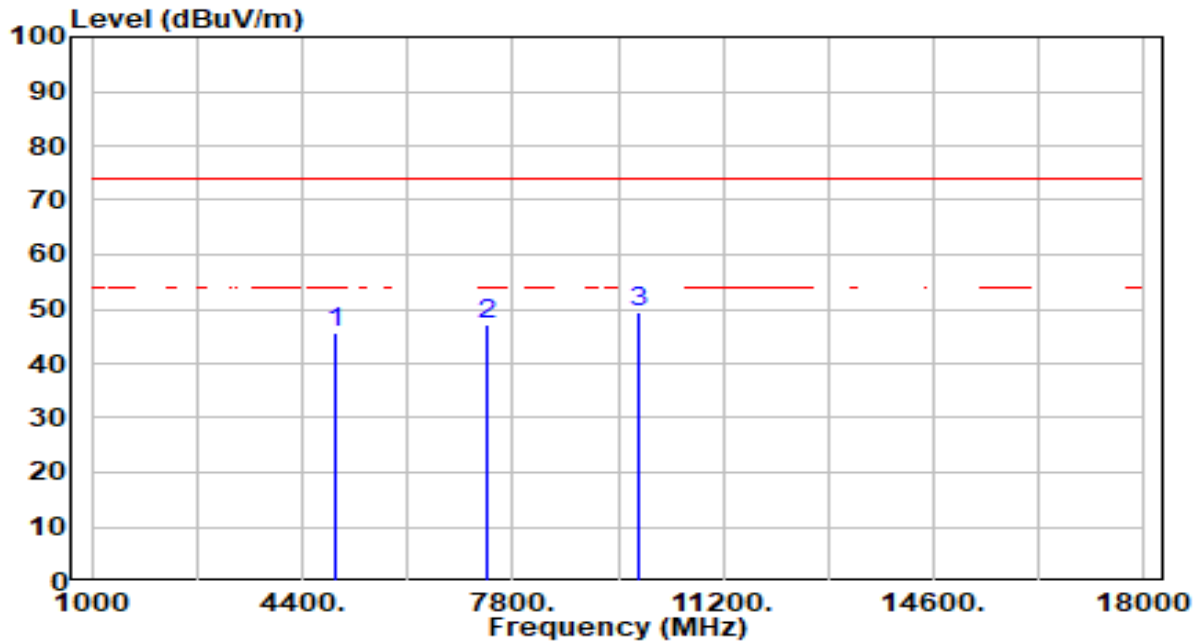


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.95	4.61	45.57	-28.43	74.00	200	259	Peak
2	7386.000	33.62	13.49	47.11	-26.89	74.00	200	259	Peak
3	* 9848.000	32.23	17.14	49.37	-24.63	74.00	200	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

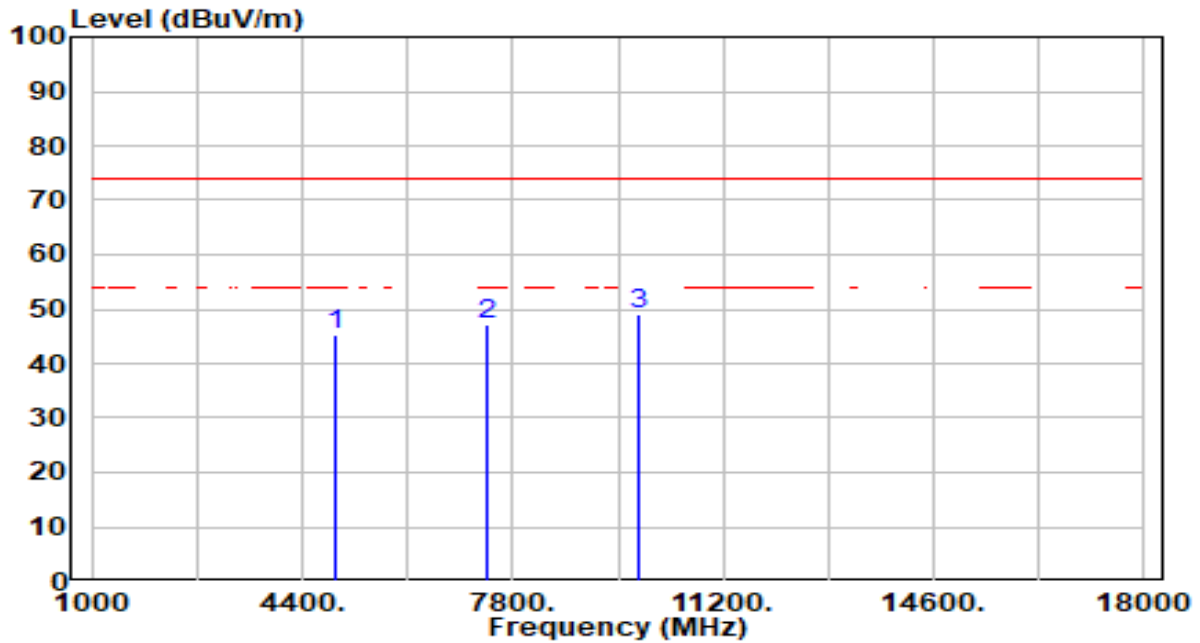


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.77	4.61	45.39	-28.61	74.00	200	188	Peak
2	7386.000	33.65	13.49	47.15	-26.85	74.00	200	261	Peak
3	* 9848.000	31.77	17.14	48.91	-25.09	74.00	200	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

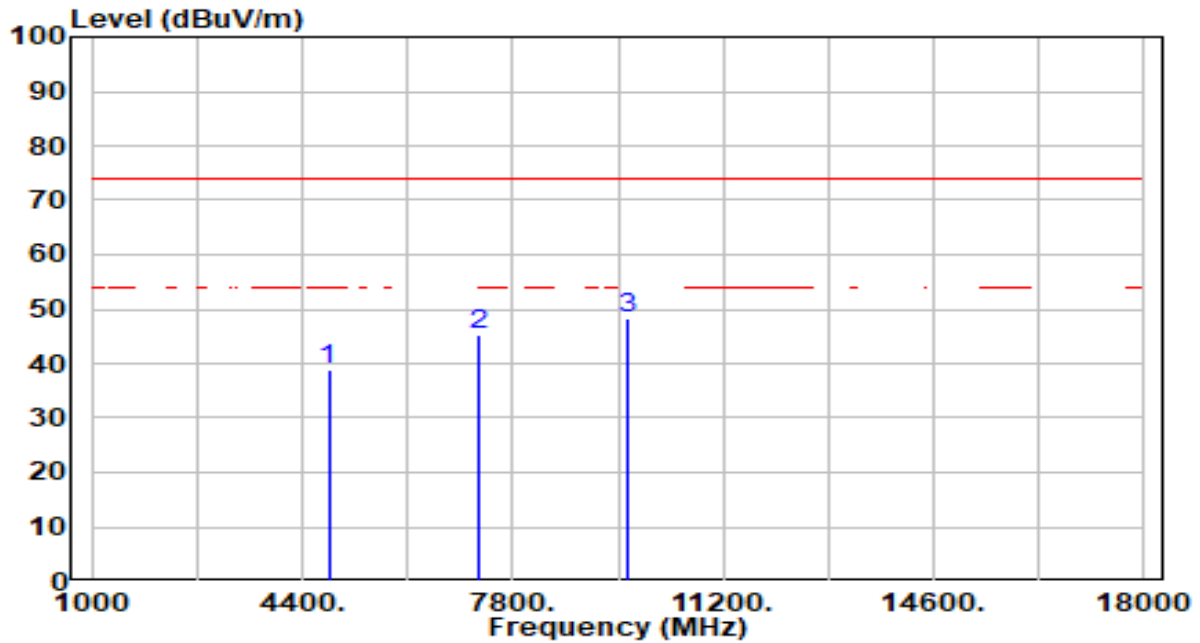


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.35	4.34	38.69	-35.31	74.00	200	35	Peak
2	7236.000	32.63	12.73	45.36	-28.64	74.00	200	265	Peak
3	* 9648.000	31.41	16.74	48.15	-25.85	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

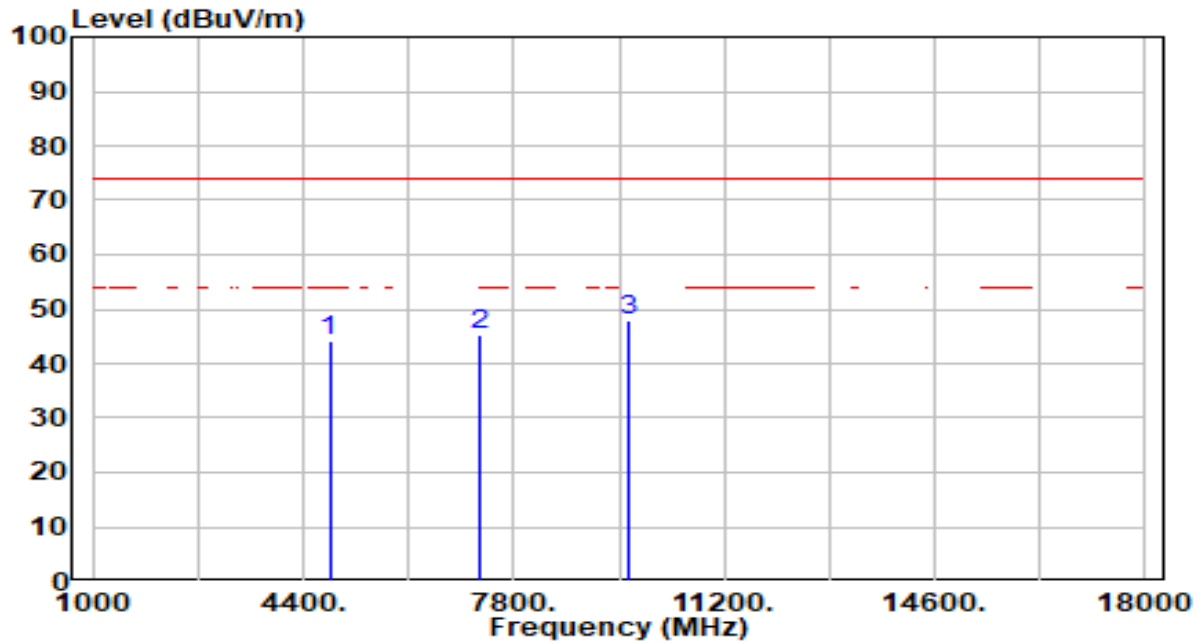


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.93	4.34	44.27	-29.73	74.00	200	192	Peak
2	7236.000	32.45	12.73	45.18	-28.82	74.00	200	259	Peak
3	* 9648.000	31.18	16.74	47.92	-26.08	74.00	200	48	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

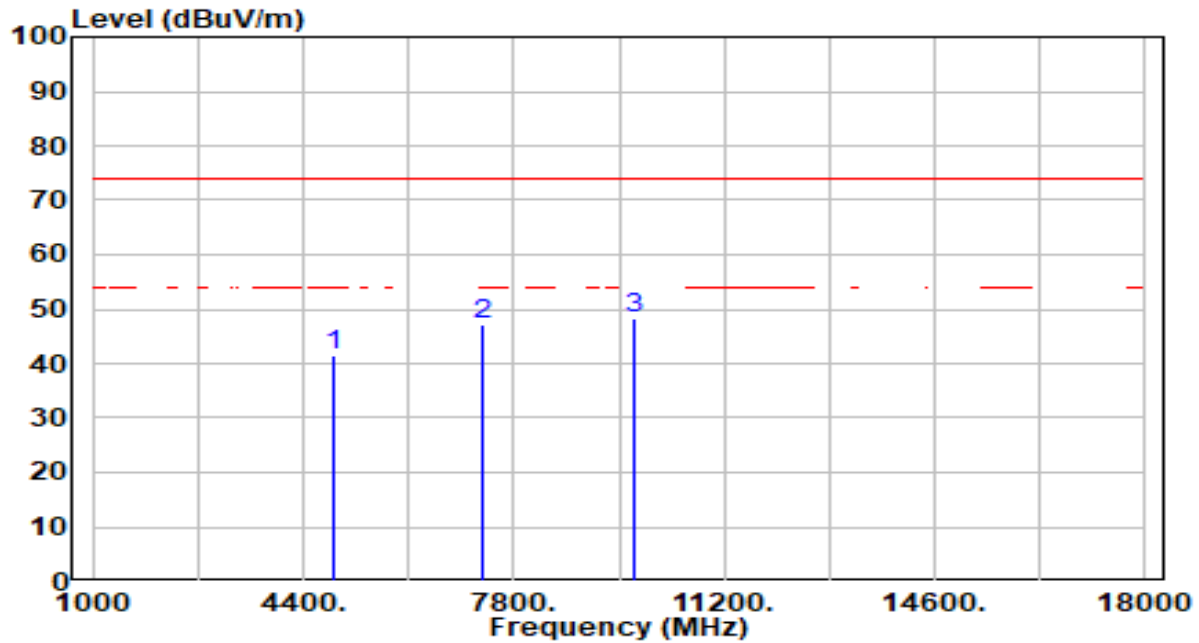


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.07	4.46	41.53	-32.47	74.00	200	242	Peak
2	7311.000	34.06	13.13	47.19	-26.81	74.00	200	249	Peak
3	* 9748.000	31.43	16.92	48.35	-25.65	74.00	200	143	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

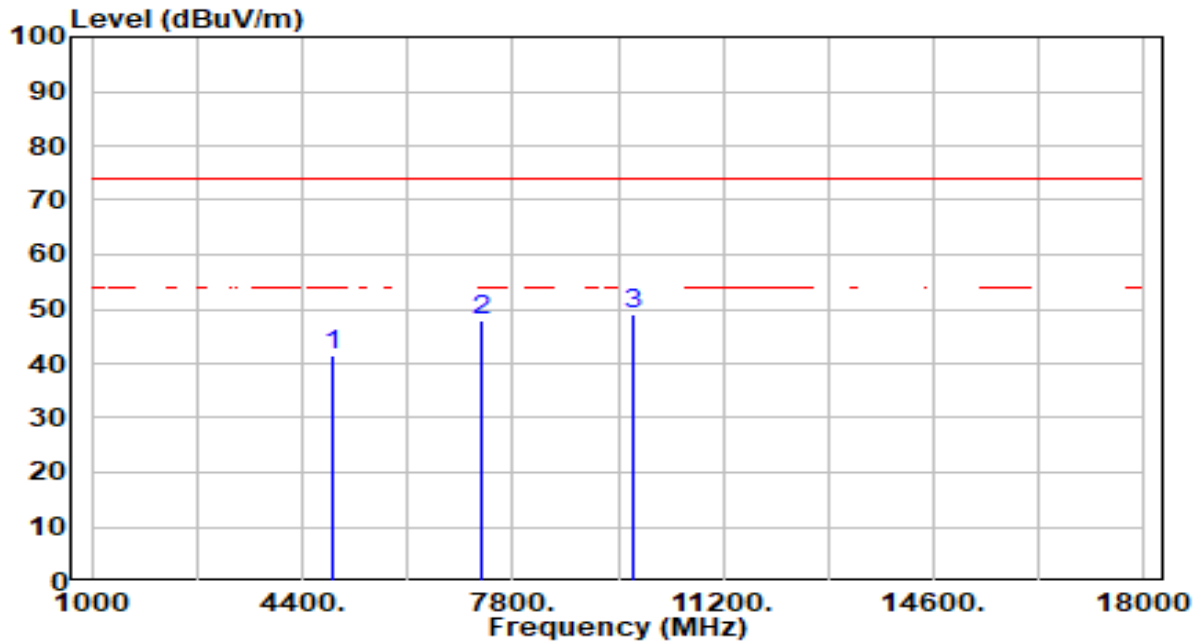


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.00	4.46	41.46	-32.54	74.00	200	173	Peak
2	7311.000	34.90	13.13	48.02	-25.98	74.00	200	265	Peak
3	* 9748.000	31.98	16.92	48.90	-25.10	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

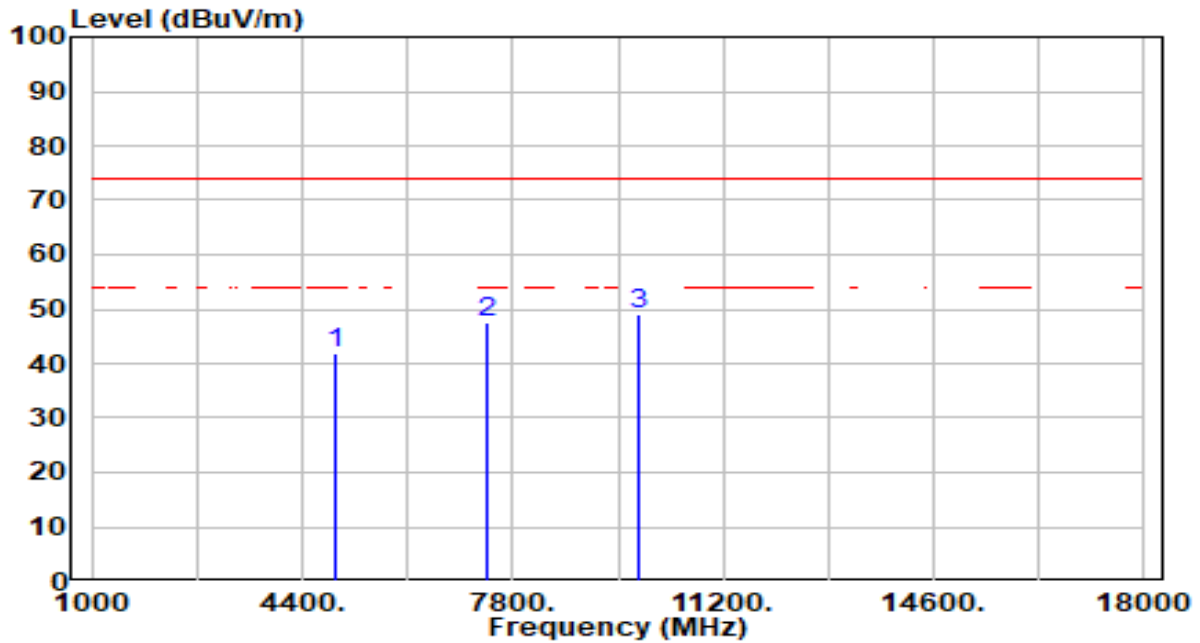


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.29	4.61	41.90	-32.10	74.00	200	254	Peak
2	7386.000	34.00	13.49	47.49	-26.51	74.00	200	257	Peak
3	* 9848.000	31.92	17.14	49.06	-24.94	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

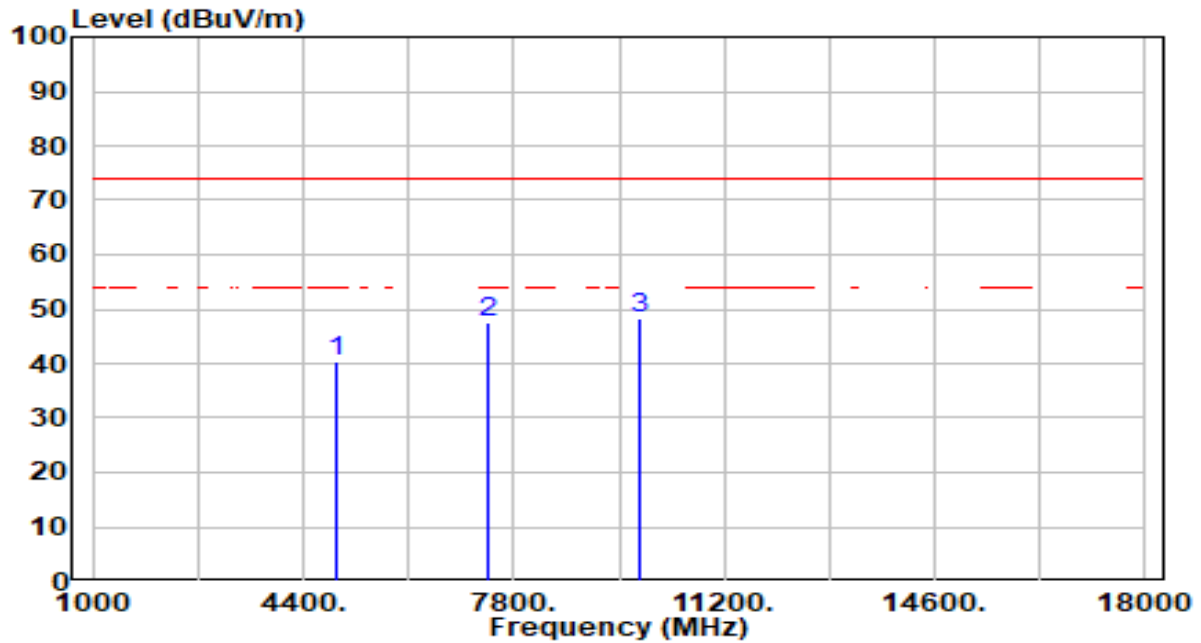


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.89	4.61	40.51	-33.49	74.00	200	175	Peak
2	7386.000	34.17	13.49	47.66	-26.34	74.00	200	265	Peak
3	* 9848.000	31.18	17.14	48.32	-25.68	74.00	200	101	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

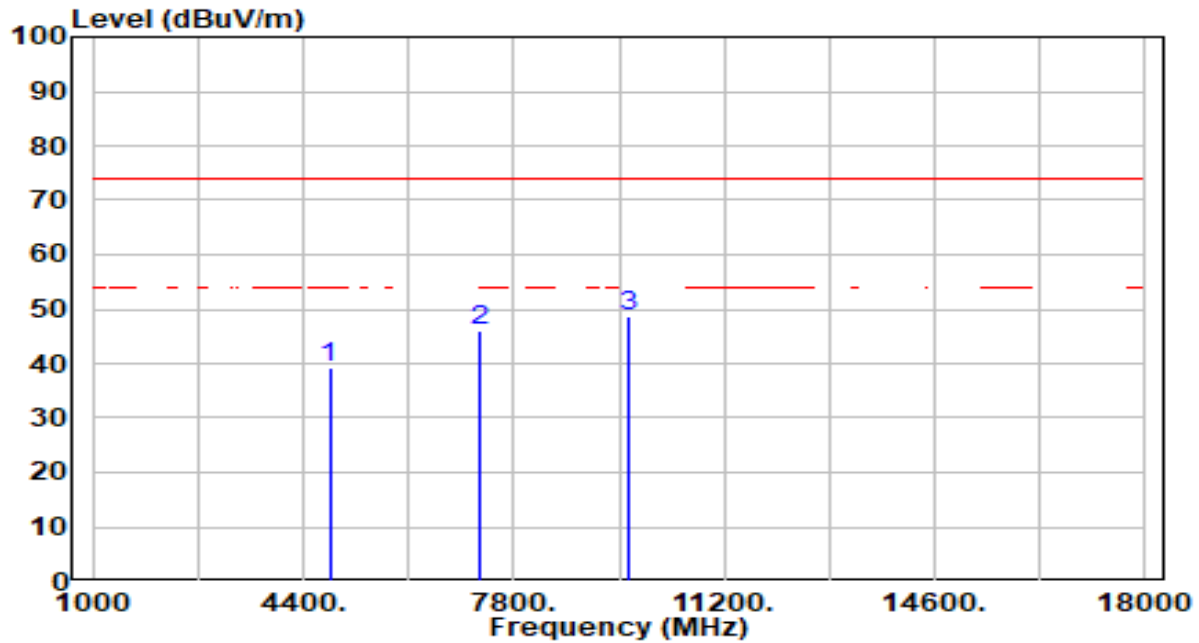


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.76	4.34	39.10	-34.90	74.00	200	284	Peak
2	7236.000	33.22	12.73	45.95	-28.05	74.00	200	273	Peak
3	* 9648.000	31.83	16.74	48.57	-25.43	74.00	200	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

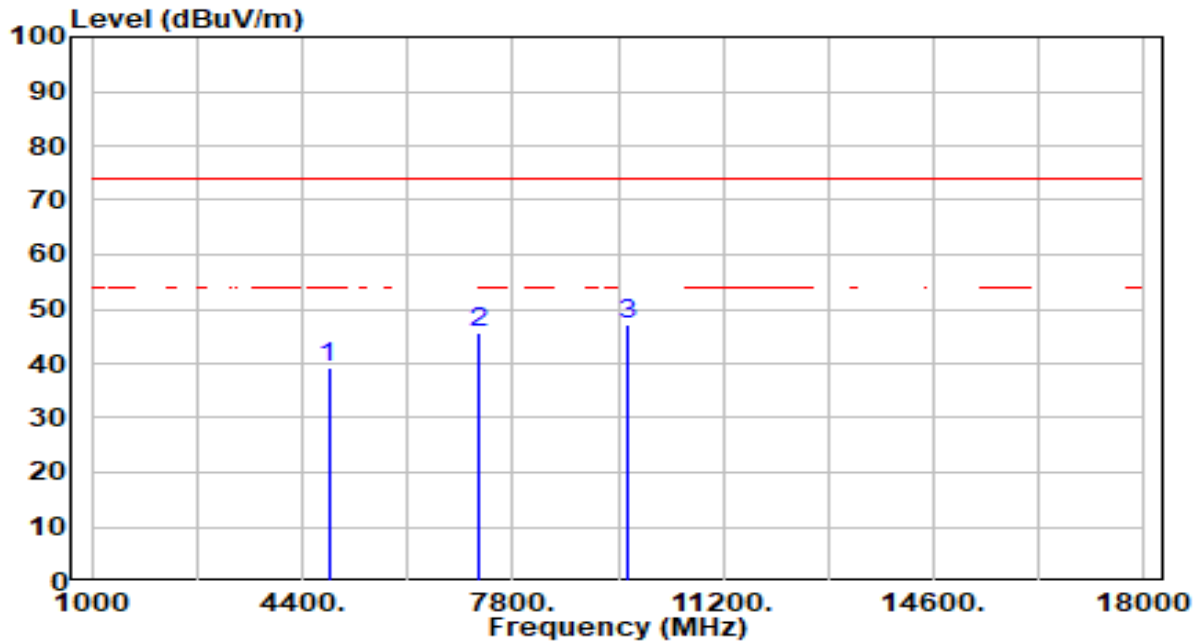


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	35.02	4.34	39.36	-34.64	74.00	200	140	Peak
2		7236.000	32.88	12.73	45.61	-28.39	74.00	200	112	Peak
3	*	9648.000	30.56	16.74	47.30	-26.70	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

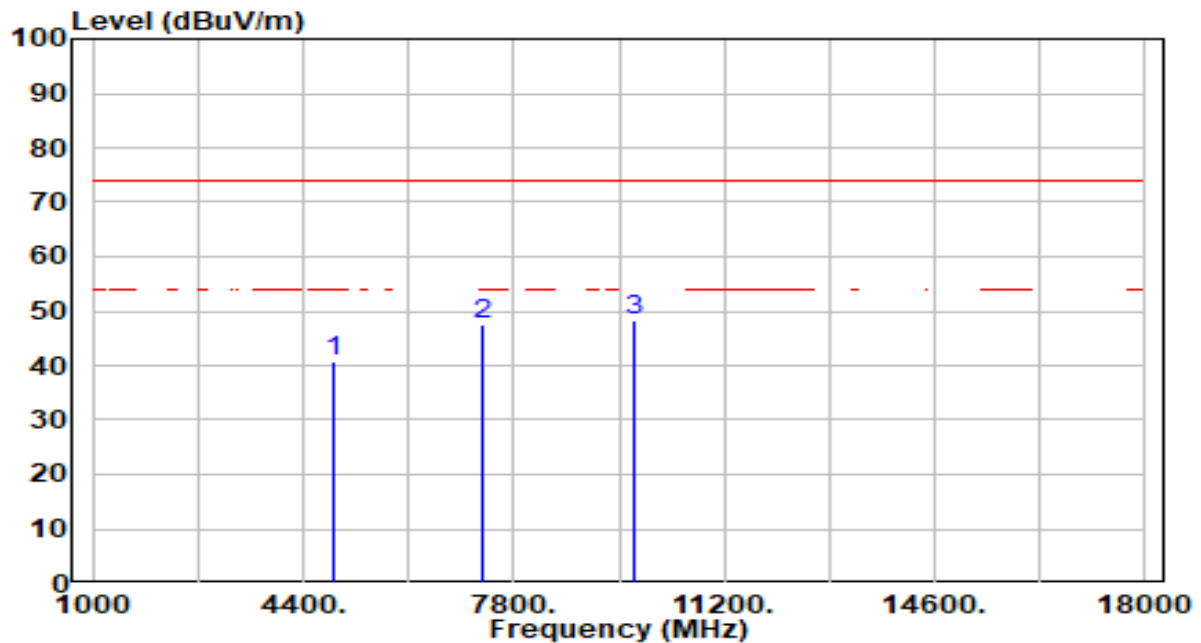


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.41	4.46	40.88	-33.12	74.00	200	249	Peak
2	7311.000	34.24	13.13	47.36	-26.64	74.00	200	249	Peak
3	* 9748.000	31.55	16.92	48.47	-25.53	74.00	200	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

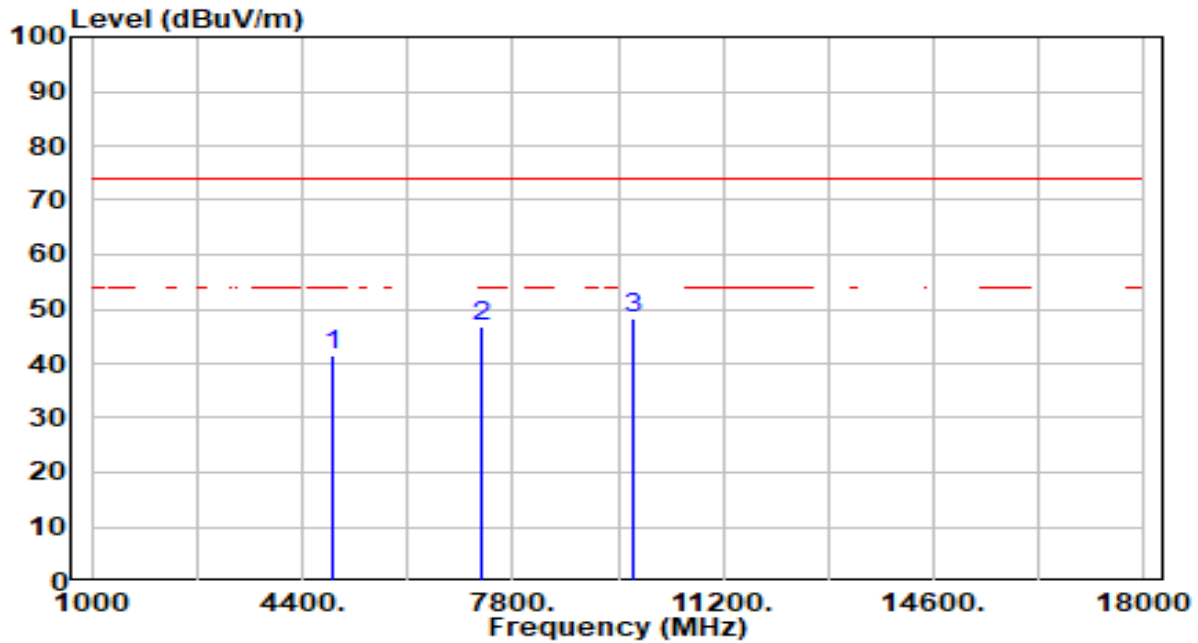


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.02	4.46	41.48	-32.52	74.00	200	195	Peak
2	7311.000	33.61	13.13	46.74	-27.26	74.00	200	124	Peak
3	* 9748.000	31.39	16.92	48.31	-25.69	74.00	200	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

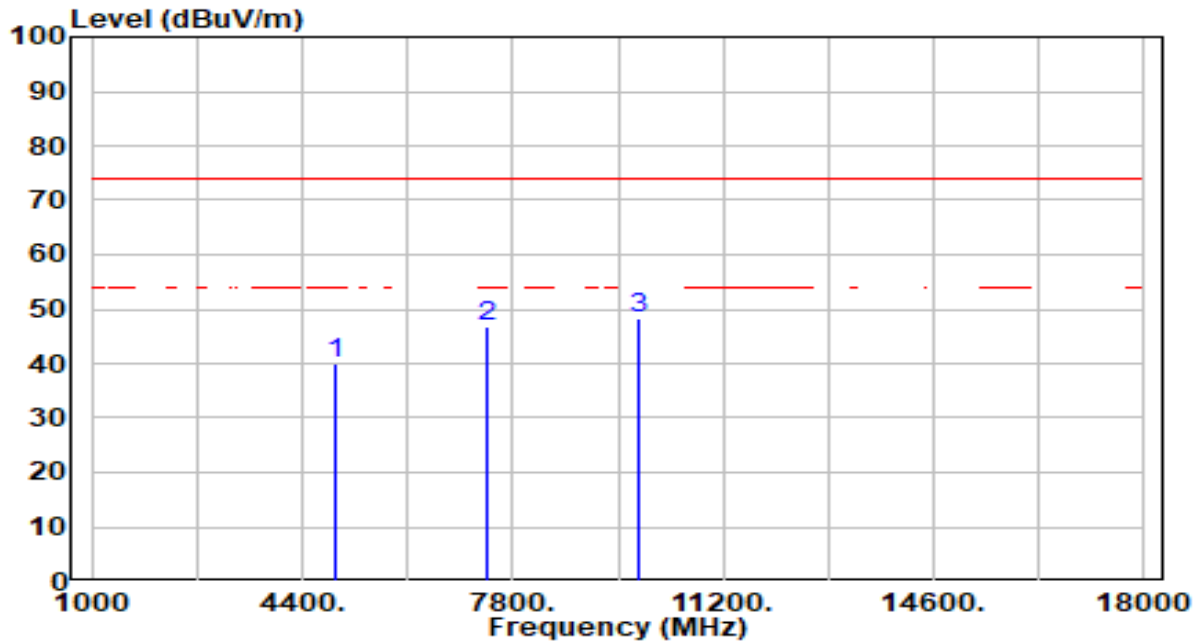


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.37	4.61	39.98	-34.02	74.00	200	252	Peak
2	7386.000	33.14	13.49	46.64	-27.36	74.00	200	302	Peak
3	* 9848.000	31.20	17.14	48.34	-25.66	74.00	200	284	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

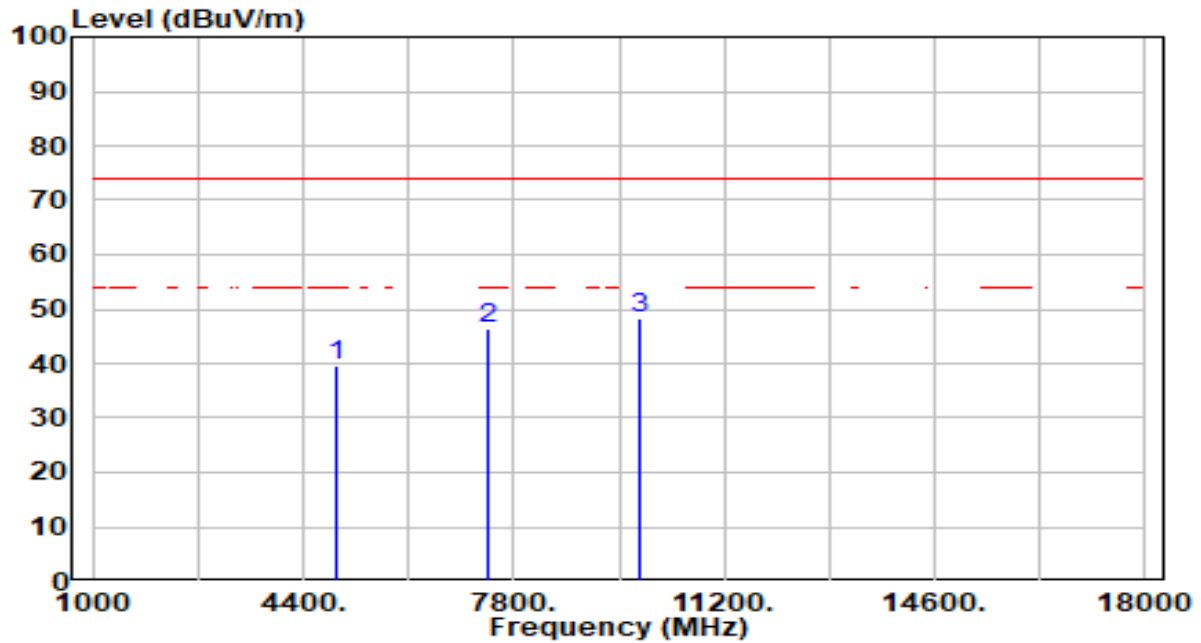


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.90	4.61	39.51	-34.49	74.00	200	199	Peak
2	7386.000	32.79	13.49	46.28	-27.72	74.00	200	262	Peak
3	* 9848.000	31.30	17.14	48.44	-25.56	74.00	200	283	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

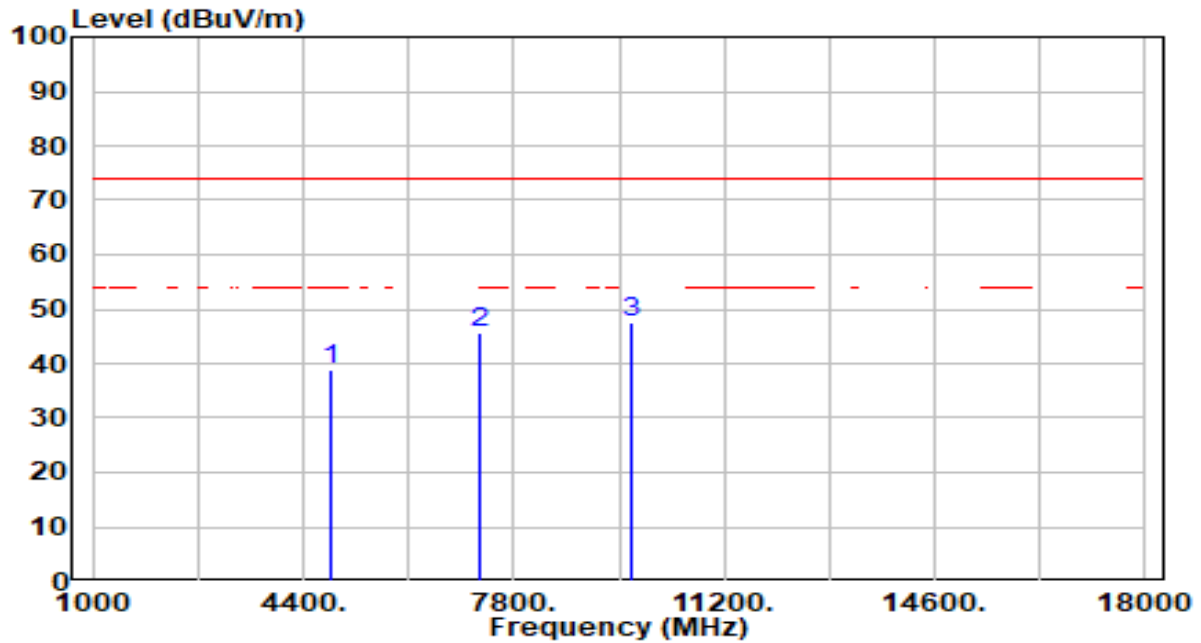


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.37	4.39	38.76	-35.24	74.00	200	148	Peak
2	7266.000	32.63	12.89	45.52	-28.48	74.00	200	221	Peak
3	* 9688.000	30.93	16.78	47.72	-26.28	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

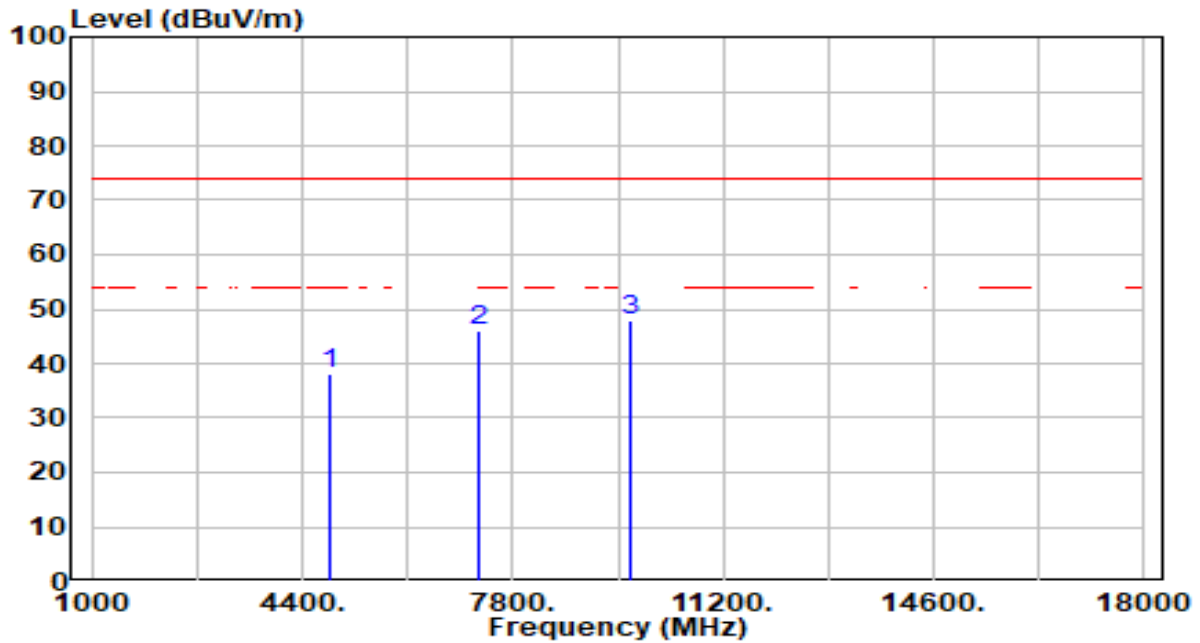


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	33.56	4.39	37.95	-36.05	74.00	200	297	Peak
2	7266.000	33.25	12.89	46.14	-27.86	74.00	200	315	Peak
3	* 9688.000	31.20	16.78	47.98	-26.02	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

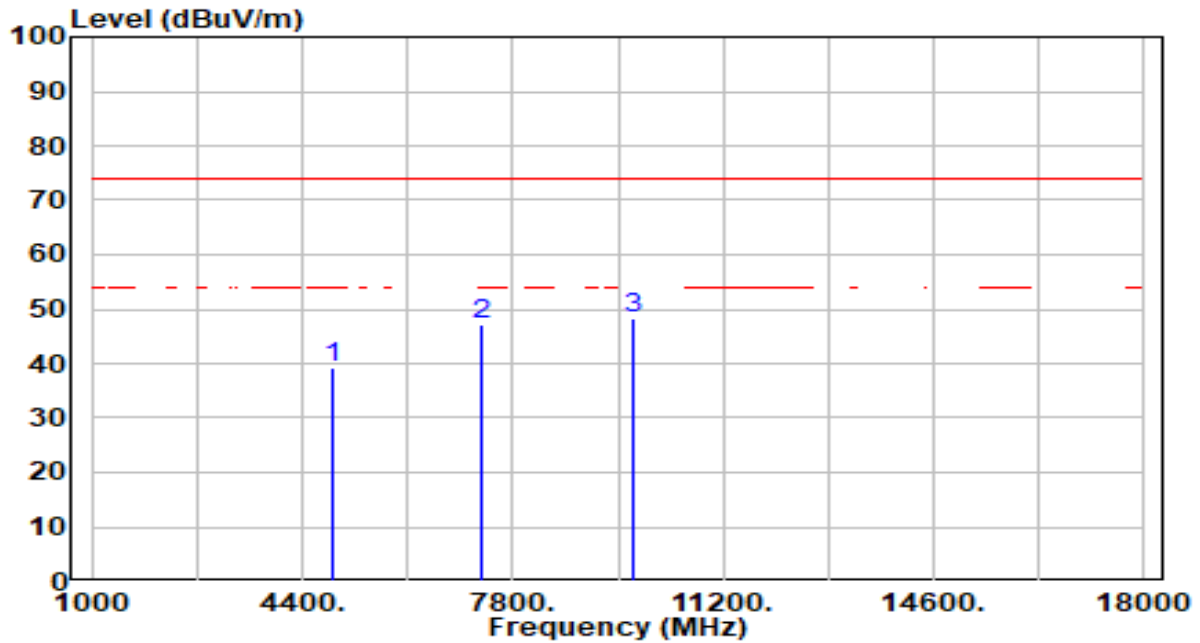


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.60	4.46	39.06	-34.94	74.00	200	254	Peak
2	7311.000	34.11	13.13	47.23	-26.77	74.00	200	262	Peak
3	* 9748.000	31.30	16.92	48.21	-25.79	74.00	200	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

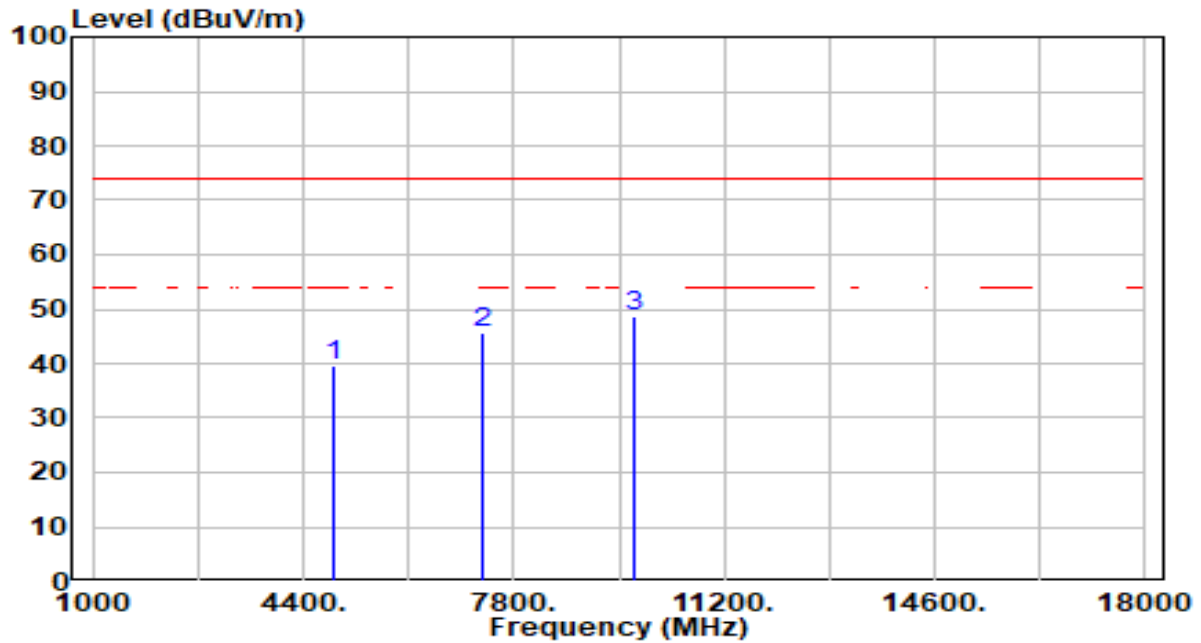


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.00	4.46	39.46	-34.54	74.00	200	175	Peak
2	7311.000	32.63	13.13	45.76	-28.24	74.00	200	235	Peak
3	* 9748.000	31.71	16.92	48.62	-25.38	74.00	200	291	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

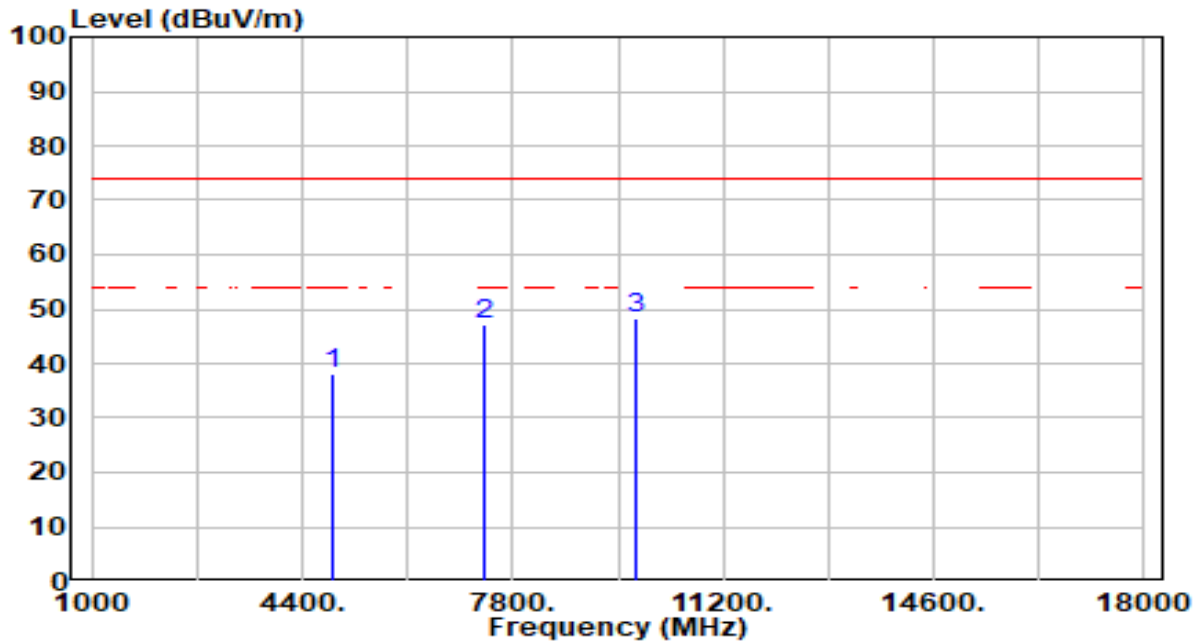


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.59	4.54	38.13	-35.87	74.00	200	136	Peak
2	7356.000	33.77	13.35	47.12	-26.88	74.00	200	257	Peak
3	* 9808.000	31.17	17.06	48.24	-25.76	74.00	200	129	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

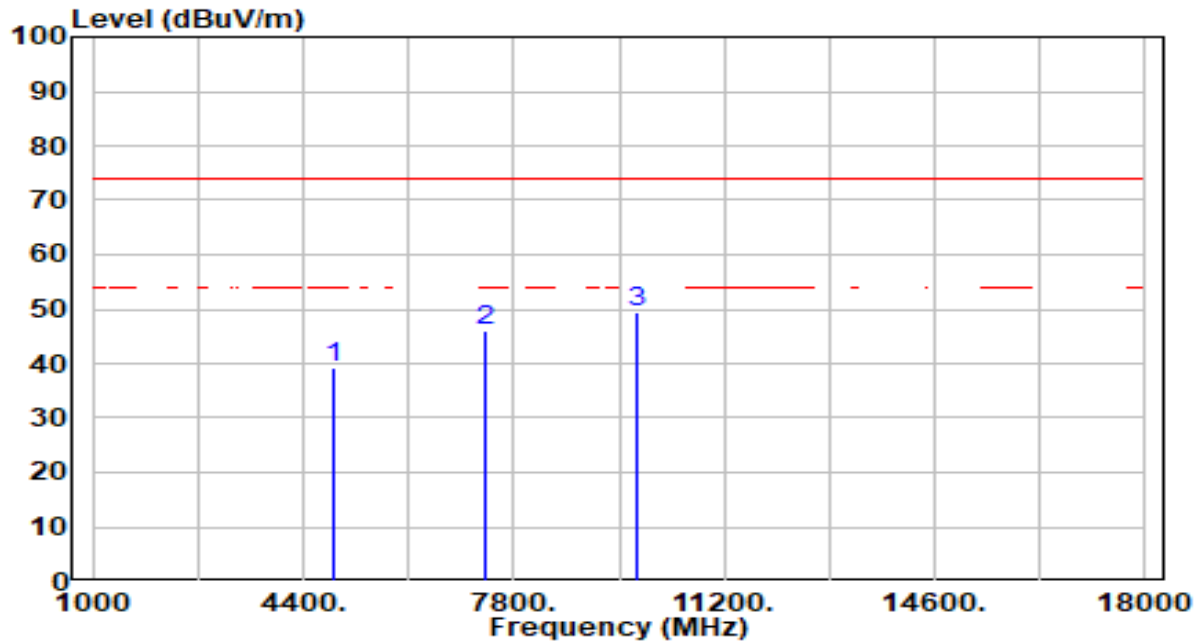


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.58	4.54	39.12	-34.88	74.00	200	284	Peak
2	7356.000	32.78	13.35	46.13	-27.87	74.00	200	266	Peak
3	* 9808.000	32.45	17.06	49.52	-24.48	74.00	200	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

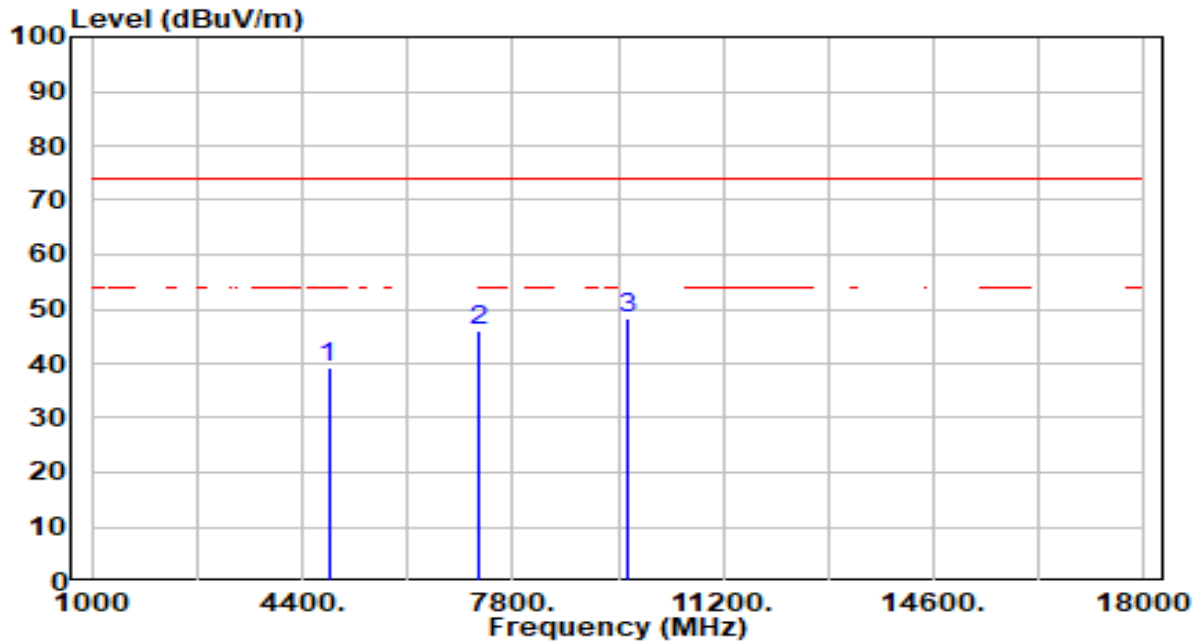


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.75	4.34	39.09	-34.91	74.00	200	341	Peak
2	7236.000	33.19	12.73	45.92	-28.08	74.00	200	344	Peak
3	* 9648.000	31.43	16.74	48.16	-25.84	74.00	200	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

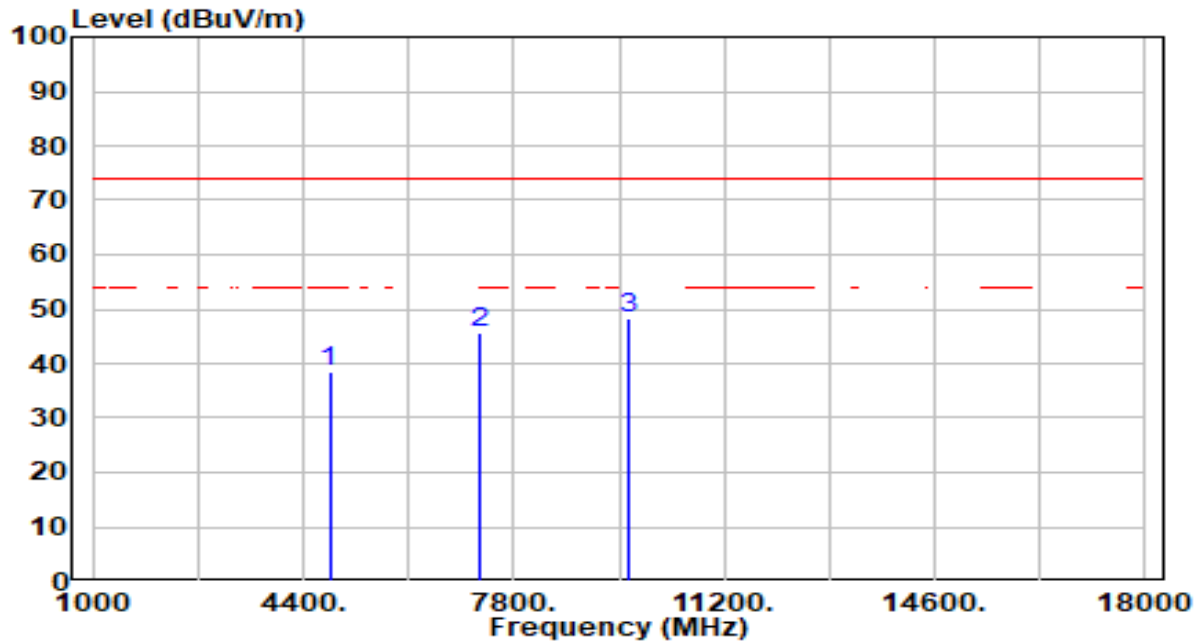


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.10	4.34	38.44	-35.56	74.00	200	107	Peak
2	7236.000	32.91	12.73	45.63	-28.37	74.00	200	86	Peak
3	* 9648.000	31.51	16.74	48.25	-25.75	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

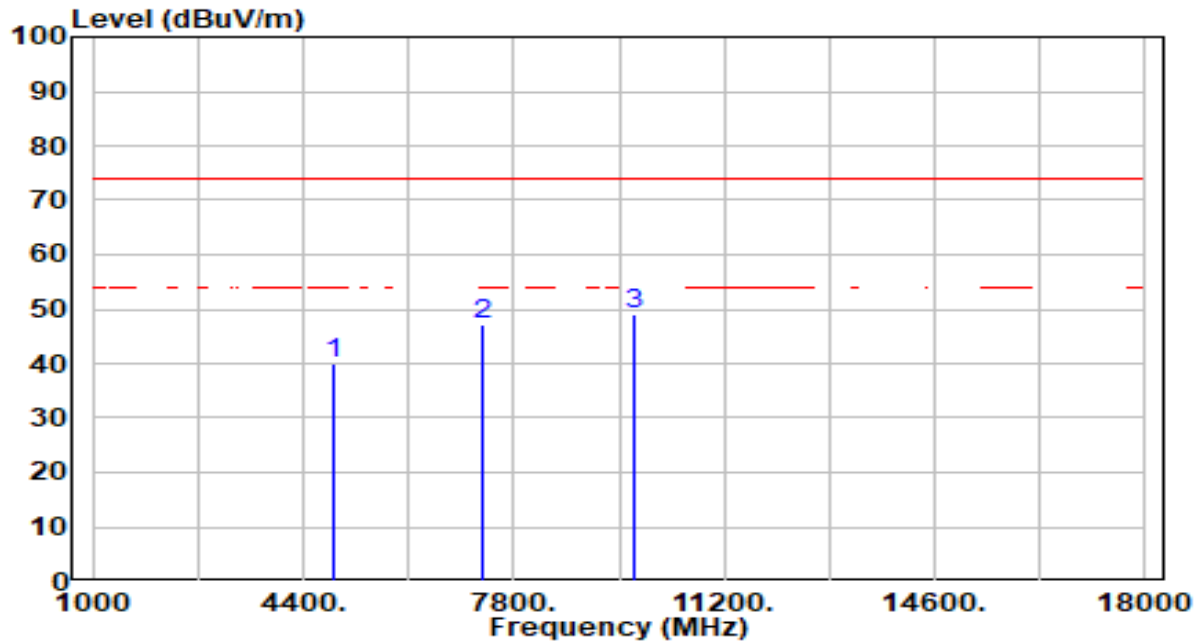


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.42	4.46	39.88	-34.12	74.00	200	256	Peak
2	7311.000	34.20	13.13	47.32	-26.68	74.00	200	260	Peak
3	* 9748.000	32.27	16.92	49.19	-24.81	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

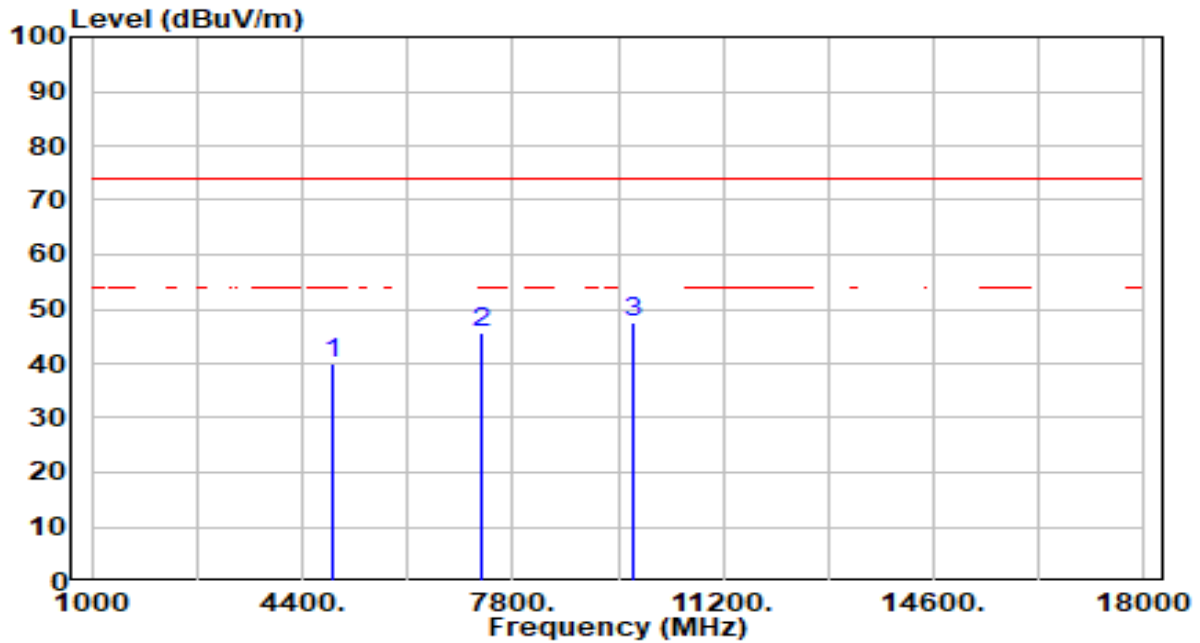


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.38	4.46	39.84	-34.16	74.00	200	175	Peak
2	7311.000	32.66	13.13	45.79	-28.21	74.00	200	203	Peak
3	* 9748.000	30.68	16.92	47.60	-26.40	74.00	200	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

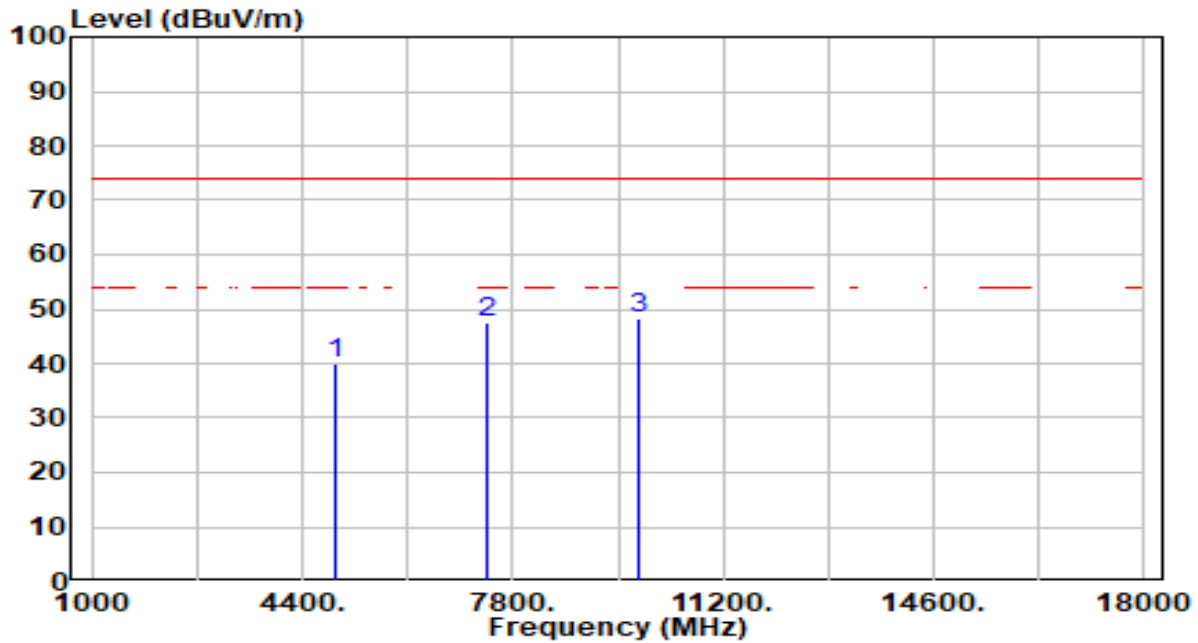


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.28	4.61	39.89	-34.11	74.00	200	207	Peak
2	7386.000	33.92	13.49	47.42	-26.58	74.00	200	271	Peak
3	* 9848.000	31.30	17.14	48.44	-25.56	74.00	200	62	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

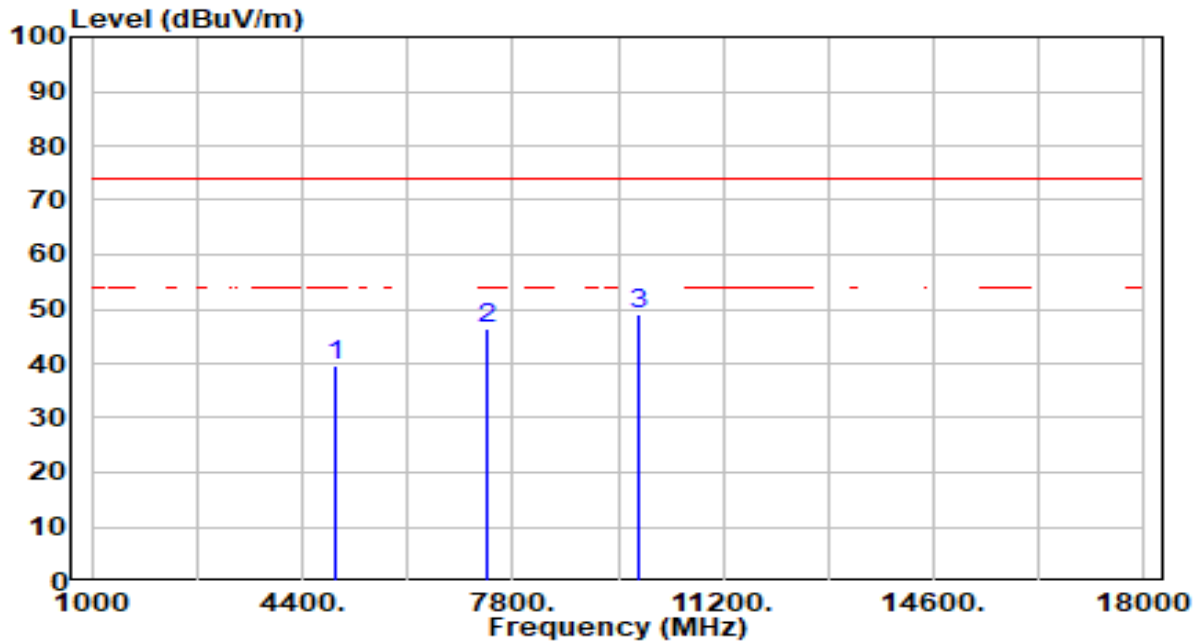


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.06	4.61	39.68	-34.32	74.00	200	189	Peak
2	7386.000	32.99	13.49	46.48	-27.52	74.00	200	266	Peak
3	* 9848.000	32.03	17.14	49.17	-24.83	74.00	200	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

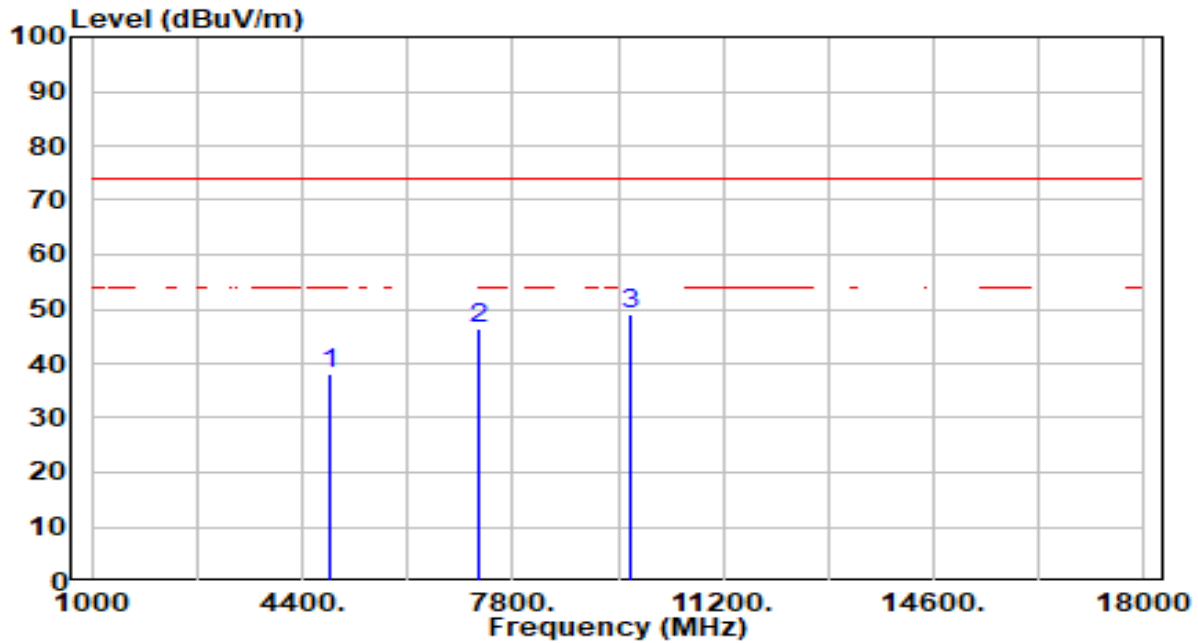


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	33.60	4.39	37.99	-36.01	74.00	200	354	Peak
2	7266.000	33.47	12.89	46.36	-27.64	74.00	200	242	Peak
3	* 9688.000	32.16	16.78	48.94	-25.06	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

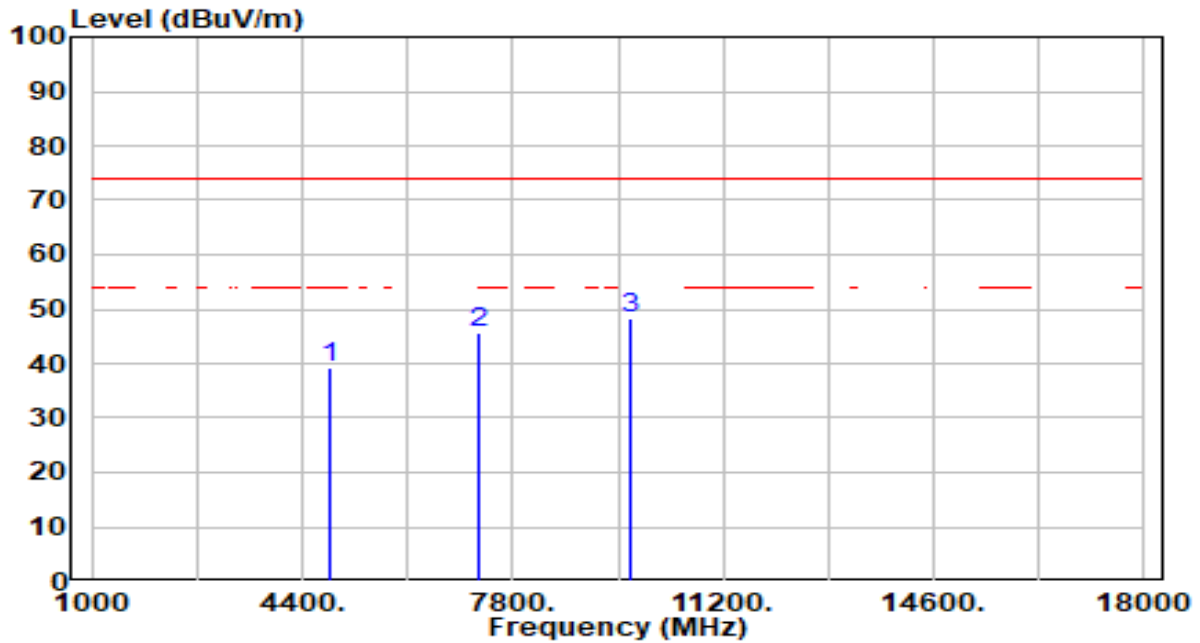


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.70	4.39	39.09	-34.91	74.00	200	216	Peak
2	7266.000	32.80	12.89	45.69	-28.31	74.00	200	272	Peak
3	* 9688.000	31.40	16.78	48.18	-25.82	74.00	200	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

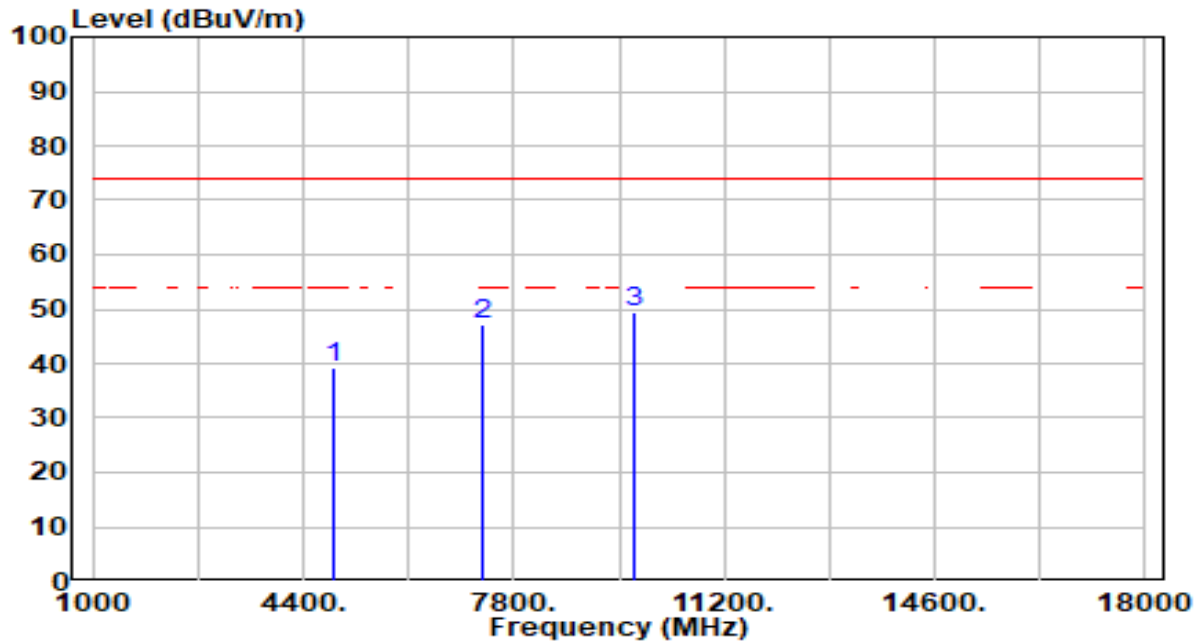


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.87	4.46	39.34	-34.66	74.00	200	222	Peak
2	7311.000	34.08	13.13	47.21	-26.79	74.00	200	278	Peak
3	* 9748.000	32.40	16.92	49.32	-24.68	74.00	200	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

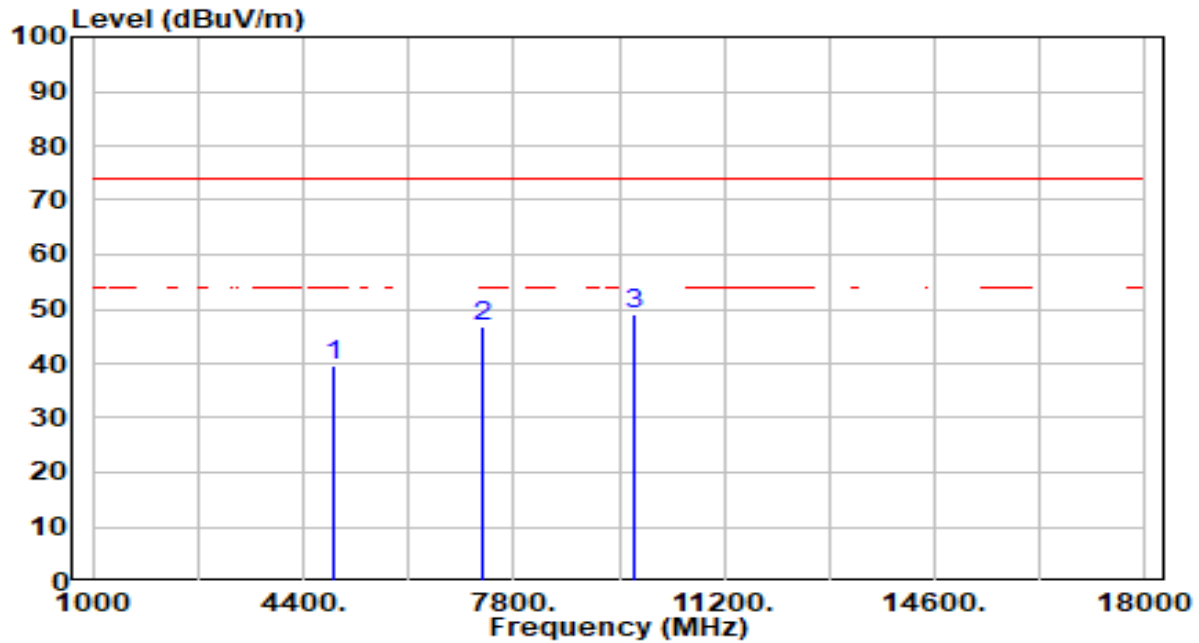


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.02	4.46	39.48	-34.52	74.00	200	194	Peak
2	7311.000	33.80	13.13	46.93	-27.07	74.00	200	262	Peak
3	* 9748.000	32.12	16.92	49.04	-24.96	74.00	200	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

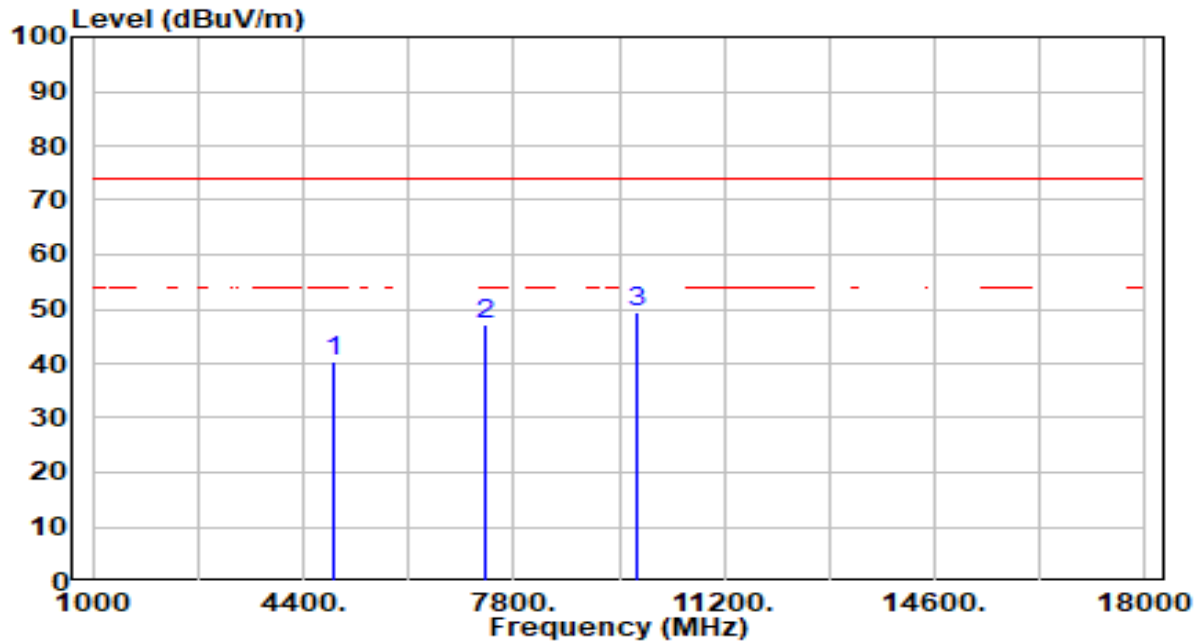


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	35.81	4.54	40.35	-33.65	74.00	200	237	Peak
2	7356.000	33.89	13.35	47.24	-26.76	74.00	200	258	Peak
3	* 9808.000	32.55	17.06	49.61	-24.39	74.00	200	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

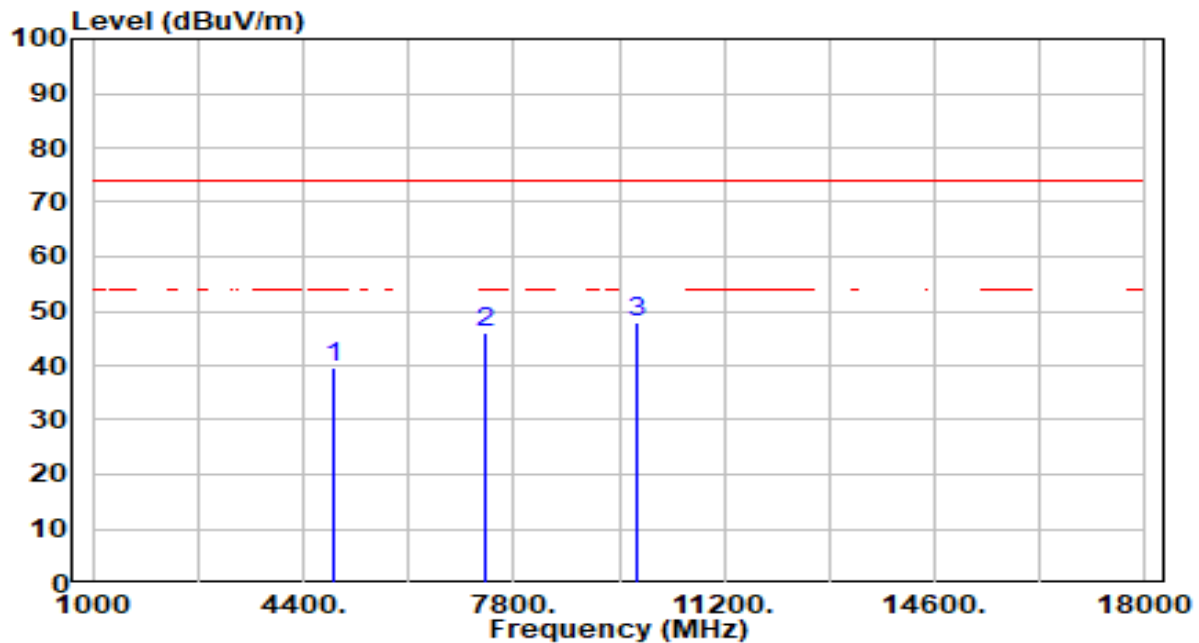


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	35.04	4.54	39.58	-34.42	74.00	200	15	Peak
2	7356.000	32.78	13.35	46.13	-27.87	74.00	200	78	Peak
3	* 9808.000	31.04	17.06	48.10	-25.90	74.00	200	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-29
Factor	BBHA 9170	Temp. / Humidity	26°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

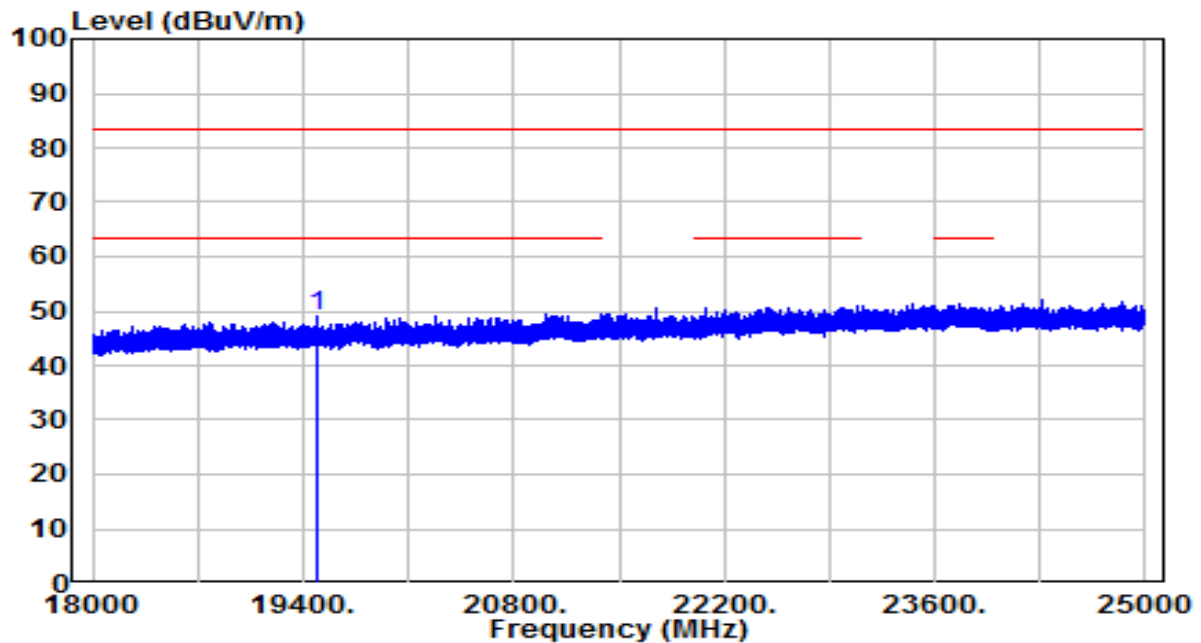


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	19491.660	38.15	10.94	49.09	-34.41	83.50	150	64	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-29
Factor	BBHA 9170	Temp. / Humidity	26°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

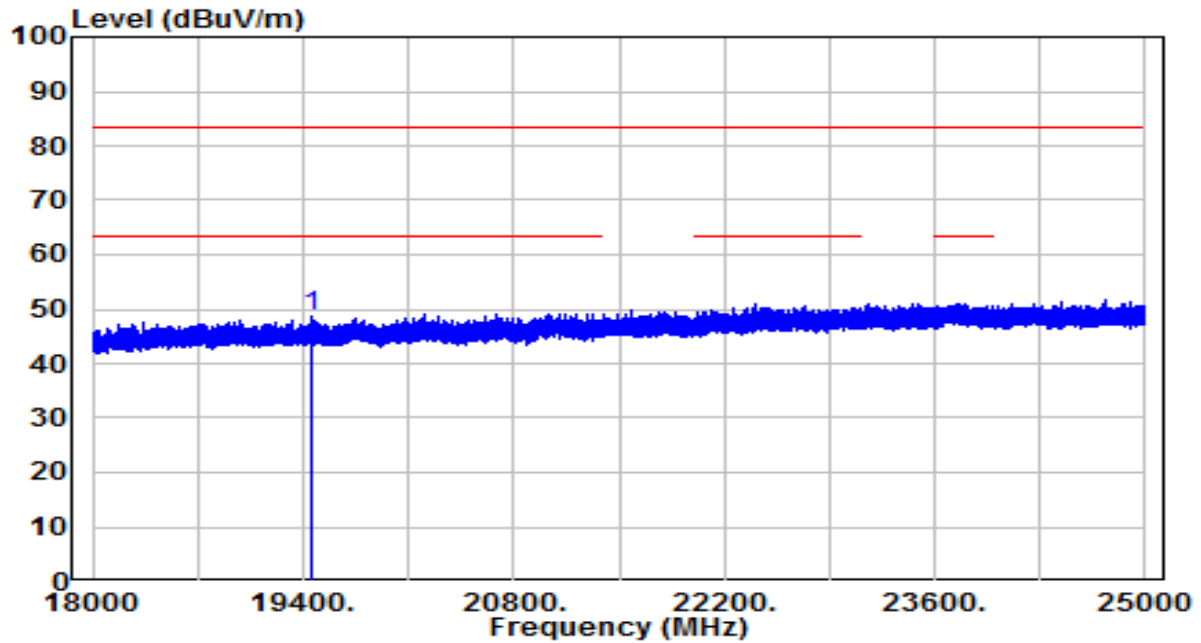

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	19458.190	37.89	10.94	48.83	-34.67	83.50	150	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

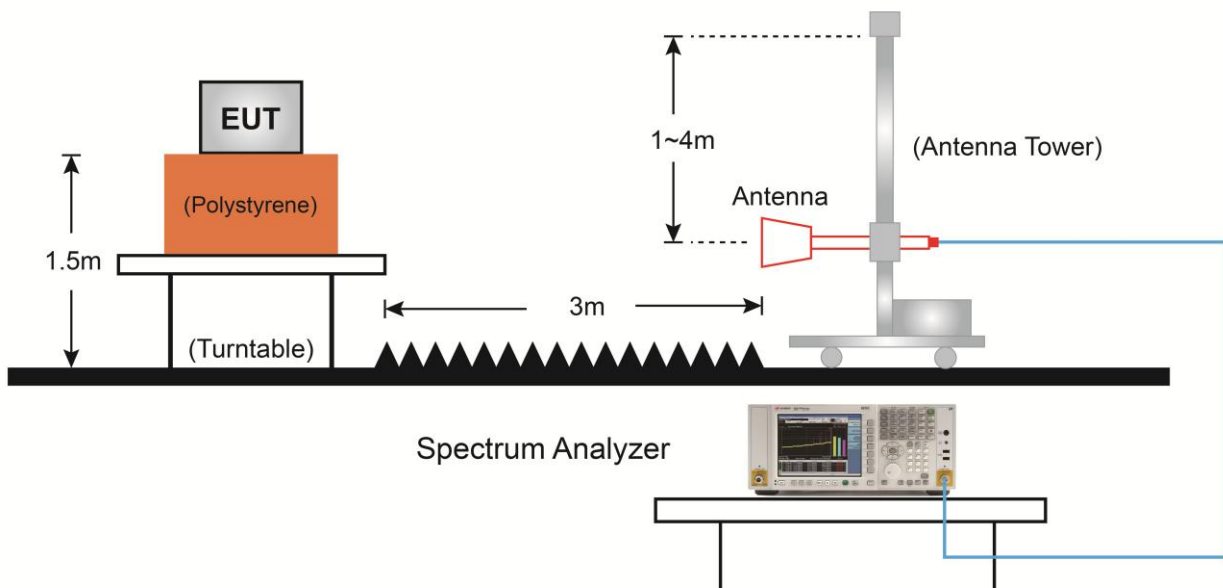7.7.4.Test Setup

7.7.5. Test Result

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

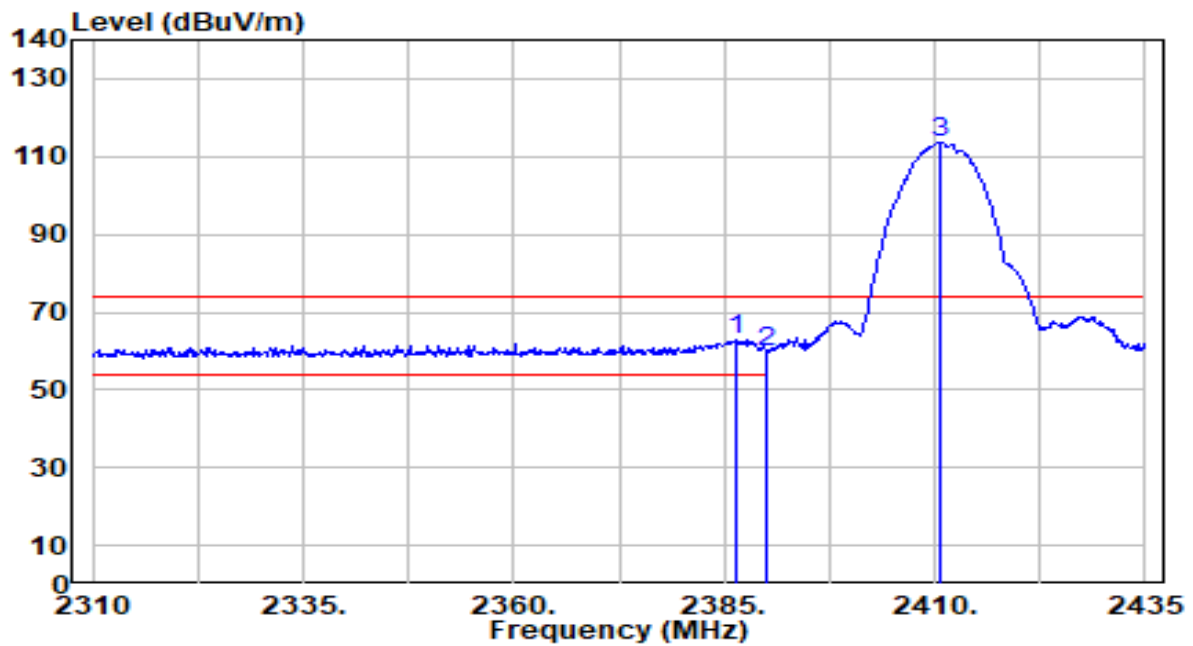


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.500	30.22	32.71	62.93	-11.07	74.00	203	240	Peak
2		2390.000	26.73	32.73	59.45	-14.55	74.00	203	240	Peak
3		2410.750	80.81	32.81	113.62	N/A	N/A	203	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

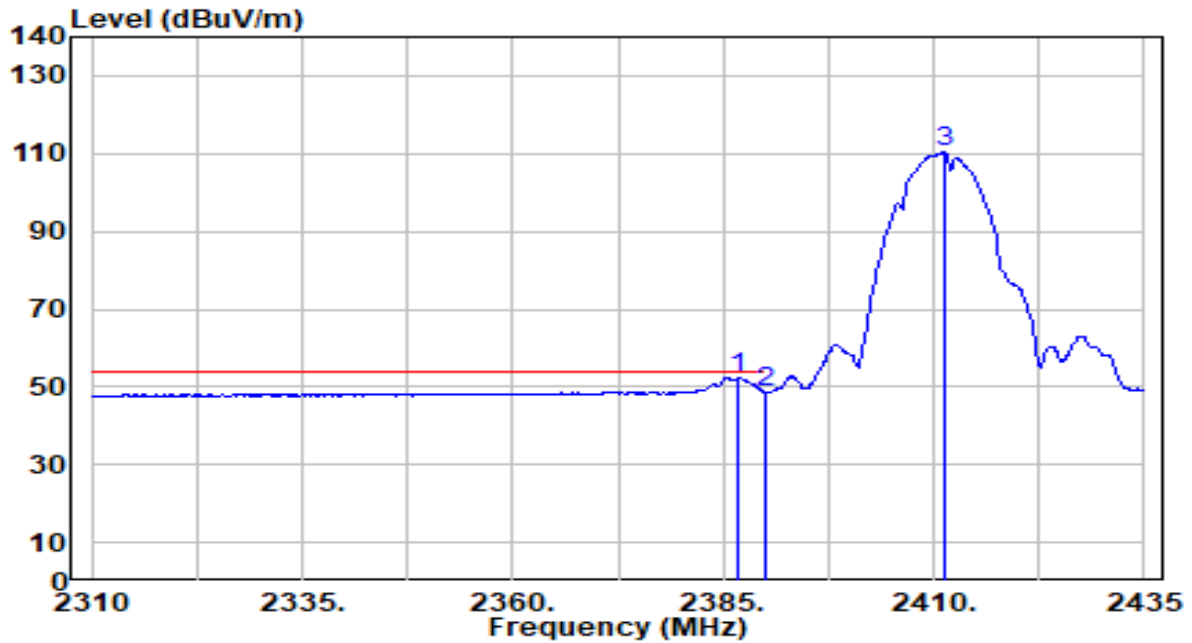


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.750	19.49	32.71	52.20	-1.80	54.00	203	240	Average
2		2390.000	15.97	32.73	48.70	-5.30	54.00	203	240	Average
3		2411.250	77.50	32.81	110.31	N/A	N/A	203	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

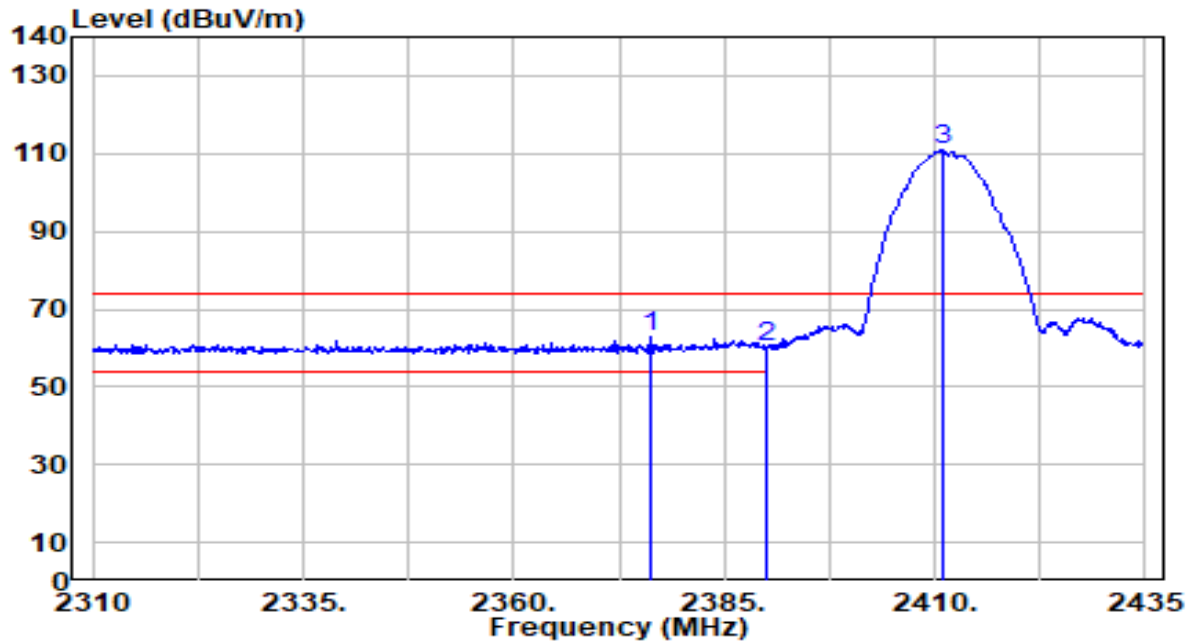


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2376.125	30.01	32.67	62.68	-11.32	74.00	100	160	Peak
2		2390.000	27.64	32.73	60.37	-13.63	74.00	100	160	Peak
3		2410.875	77.88	32.81	110.69	N/A	N/A	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

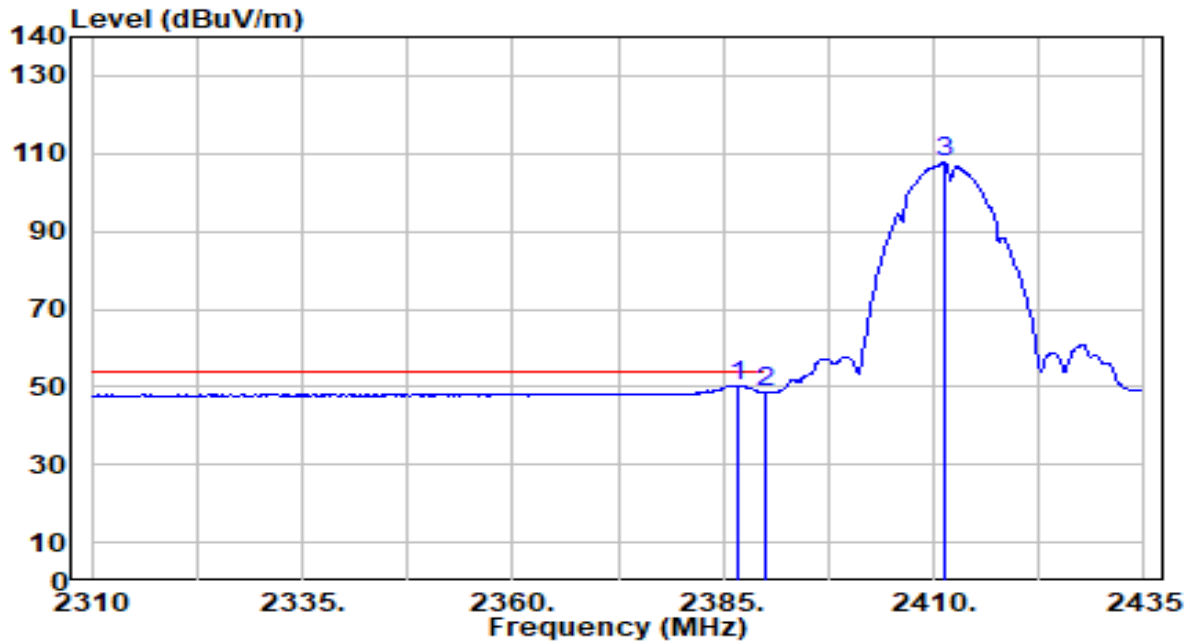


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.625	17.60	32.71	50.32	-3.68	54.00	100	160	Average
2		2390.000	15.69	32.73	48.42	-5.58	54.00	100	160	Average
3		2411.250	74.84	32.81	107.65	N/A	N/A	100	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

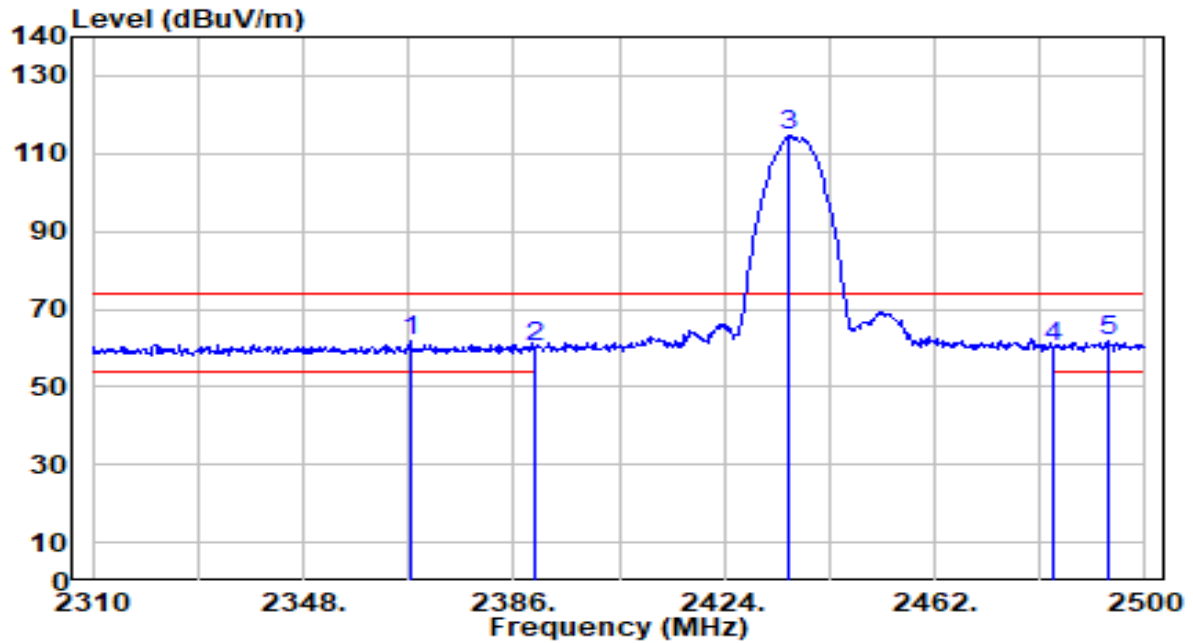


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2367.380	29.37	32.64	62.01	-11.99	74.00	200	216	Peak
2		2390.000	27.41	32.73	60.14	-13.86	74.00	200	216	Peak
3		2435.780	81.51	32.91	114.41	N/A	N/A	200	216	Peak
4		2483.500	27.08	33.09	60.17	-13.83	74.00	200	216	Peak
5		2493.540	28.46	33.13	61.60	-12.40	74.00	200	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

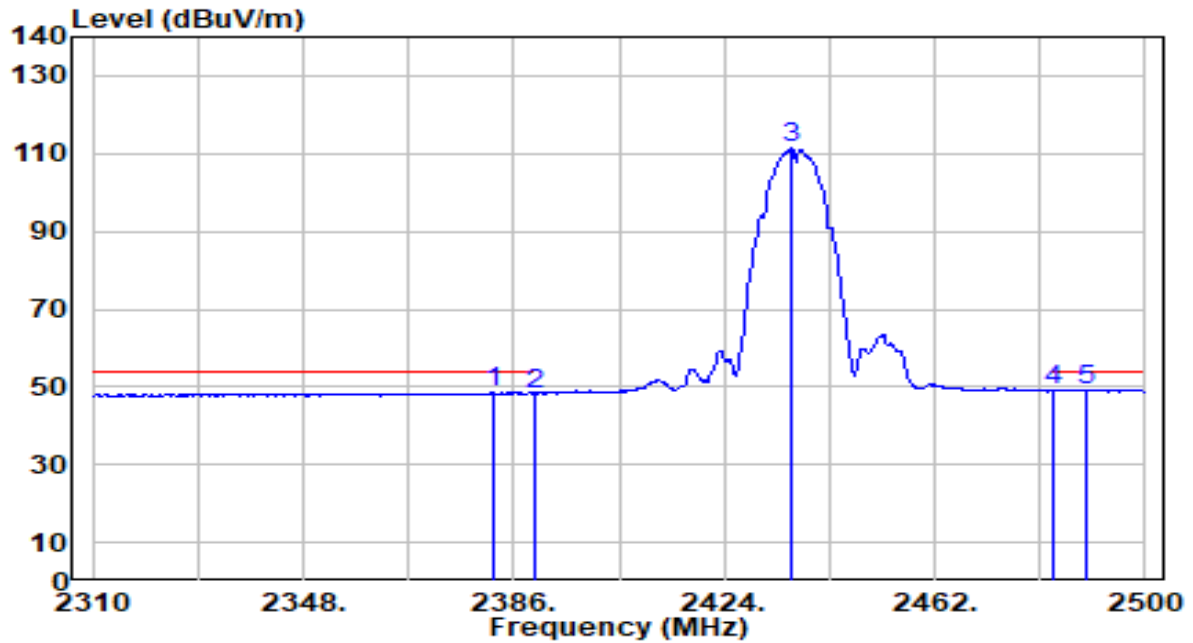


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.390	16.00	32.70	48.70	-5.30	54.00	200	216	Average
2	2390.000	15.61	32.73	48.34	-5.66	54.00	200	216	Average
3	2436.350	78.47	32.91	111.38	N/A	N/A	200	216	Average
4	2483.500	15.91	33.09	49.01	-4.99	54.00	200	216	Average
5	* 2489.550	16.19	33.12	49.31	-4.69	54.00	200	216	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

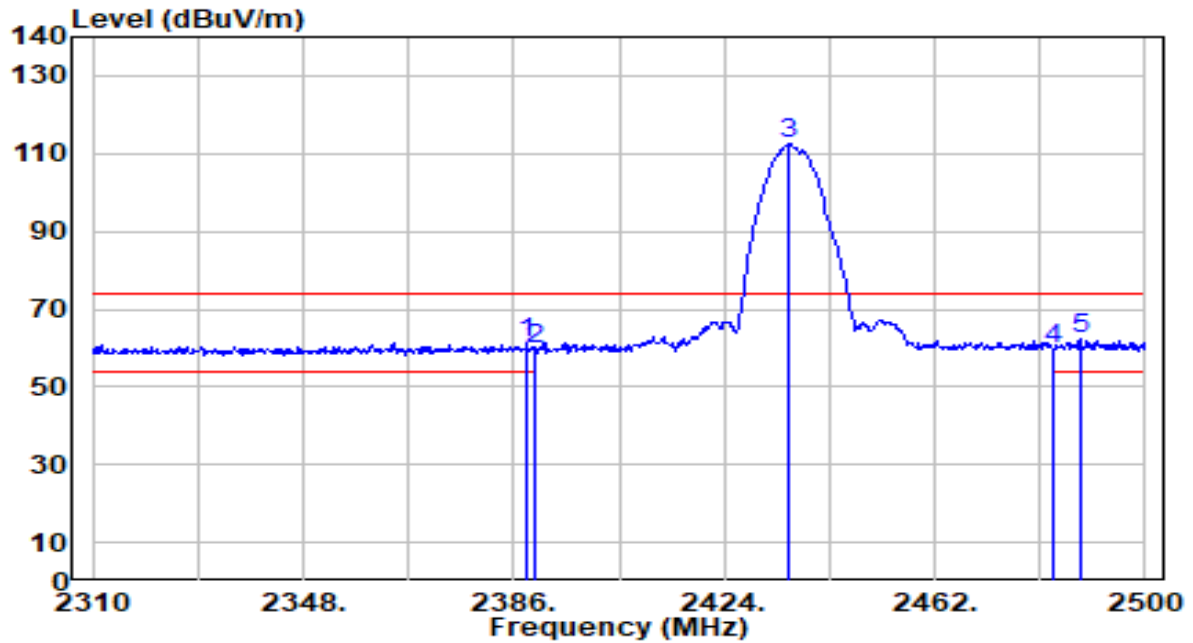


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	28.68	32.72	61.40	-12.60	74.00	100	167	Peak
2	2390.000	26.75	32.73	59.47	-14.53	74.00	100	167	Peak
3	2435.780	79.44	32.91	112.34	N/A	N/A	100	167	Peak
4	2483.500	26.71	33.09	59.80	-14.20	74.00	100	167	Peak
5	* 2488.220	29.13	33.11	62.24	-11.76	74.00	100	167	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

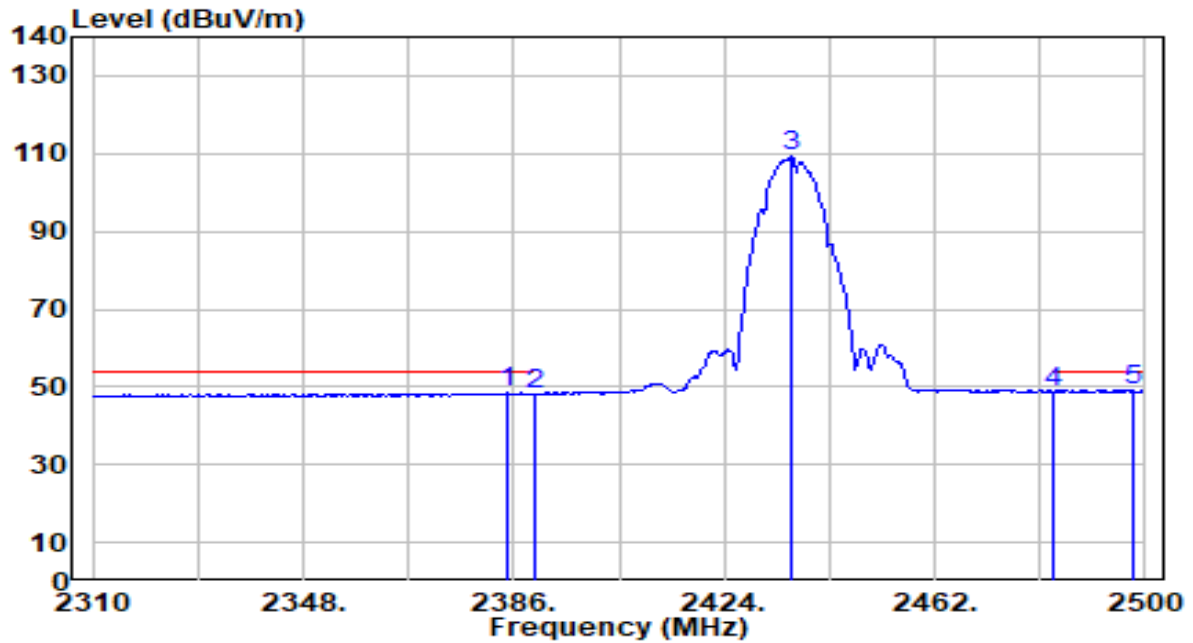


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.670	15.76	32.71	48.46	-5.54	54.00	100	167	Average
2	2390.000	15.49	32.73	48.22	-5.78	54.00	100	167	Average
3	2436.350	76.20	32.91	109.10	N/A	N/A	100	167	Average
4	2483.500	15.73	33.09	48.82	-5.18	54.00	100	167	Average
5	* 2497.910	16.04	33.15	49.19	-4.81	54.00	100	167	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

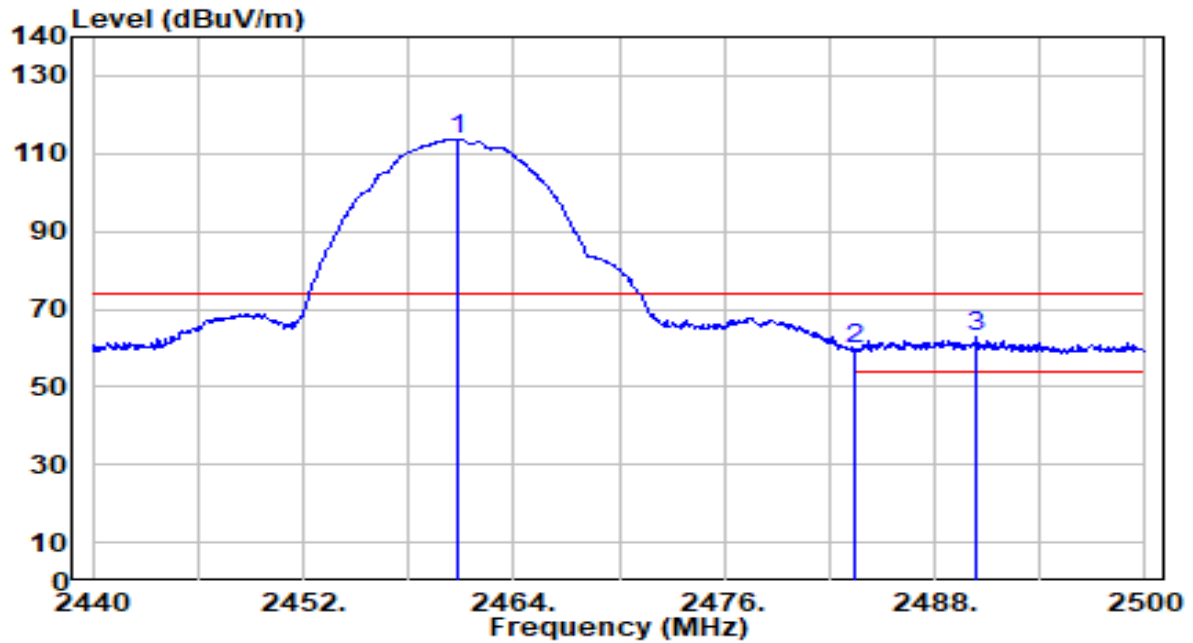


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	80.83	33.01	113.84	N/A	N/A	200	239	Peak
2	2483.500	26.77	33.09	59.87	-14.13	74.00	200	239	Peak
3	* 2490.340	29.80	33.12	62.92	-11.08	74.00	200	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

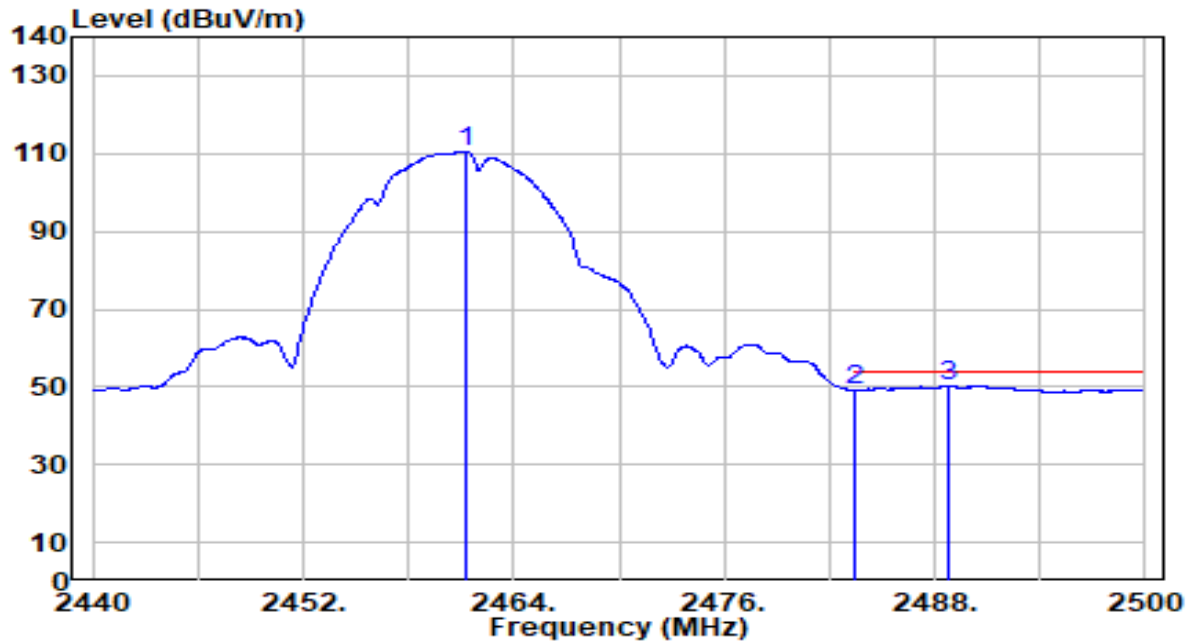


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	77.59	33.01	110.59	N/A	N/A	200	239	Average
2	2483.500	15.90	33.09	49.00	-5.00	54.00	200	239	Average
3	* 2488.780	17.31	33.12	50.43	-3.57	54.00	200	239	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

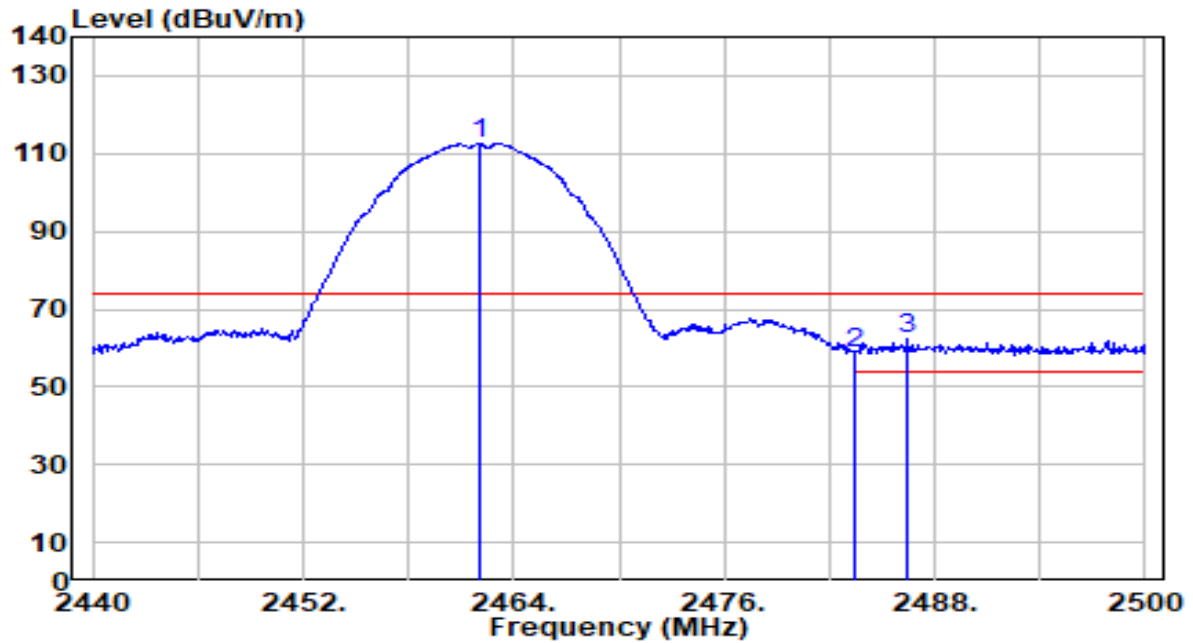


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.020	79.49	33.01	112.50	N/A	N/A	100	150	Peak
2	2483.500	25.39	33.09	58.48	-15.52	74.00	100	150	Peak
3	* 2486.440	29.01	33.11	62.11	-11.89	74.00	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

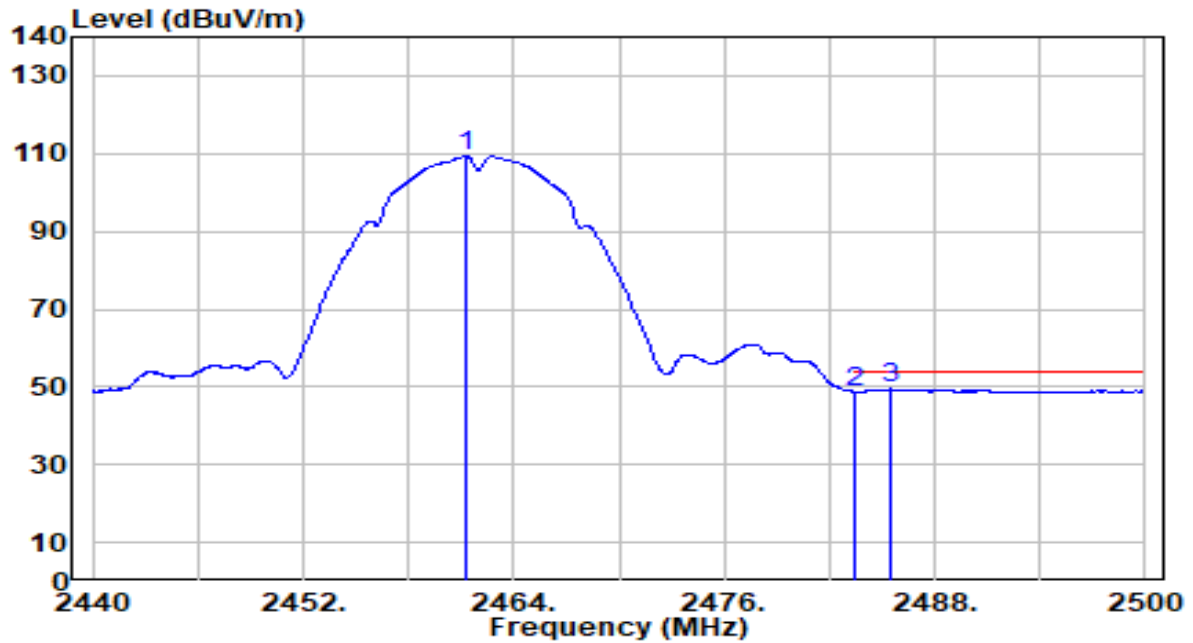


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	76.40	33.01	109.41	N/A	N/A	100	150	Average
2	2483.500	15.56	33.09	48.65	-5.35	54.00	100	150	Average
3	* 2485.540	16.32	33.10	49.42	-4.58	54.00	100	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

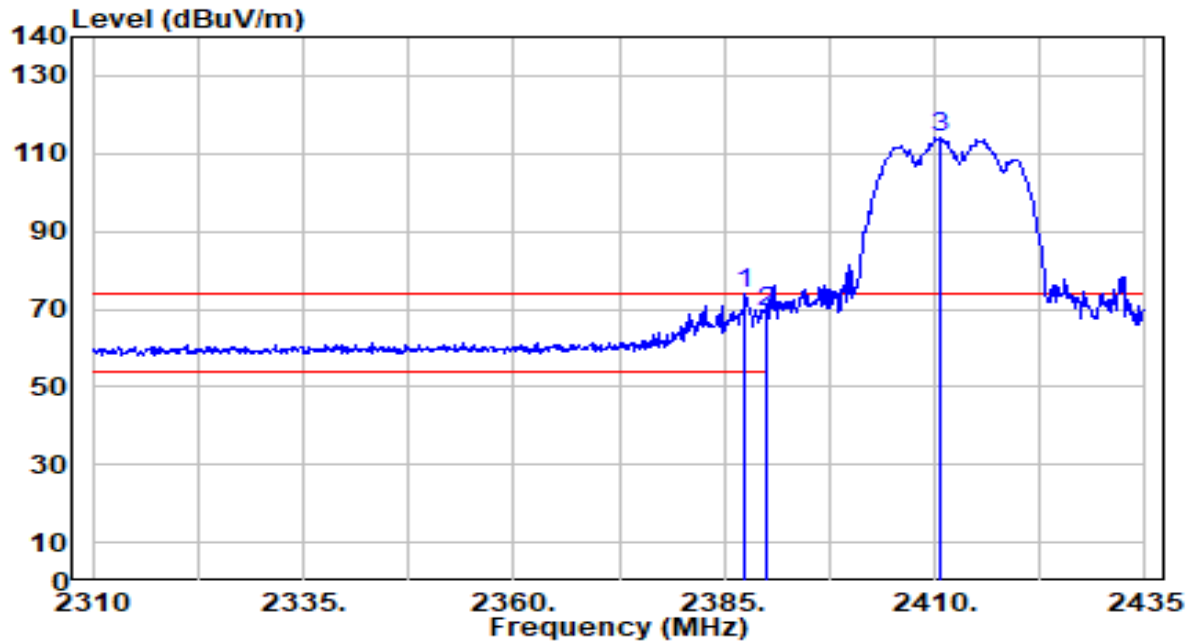


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.375	41.10	32.72	73.81	-0.19	74.00	204	240	Peak
2		2390.000	36.54	32.73	69.27	-4.73	74.00	204	240	Peak
3		2410.500	81.50	32.81	114.30	N/A	N/A	204	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

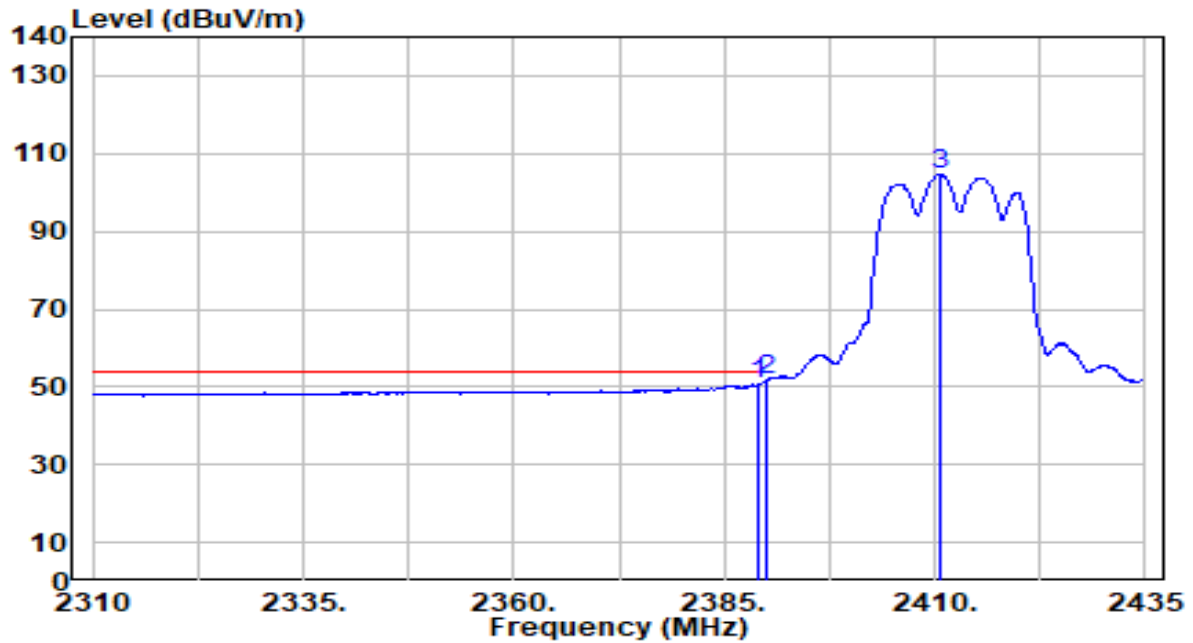


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	17.82	32.72	50.55	-3.45	54.00	204	240	Average
2	*	2390.000	18.93	32.73	51.66	-2.34	54.00	204	240	Average
3		2410.625	71.90	32.81	104.70	N/A	N/A	204	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

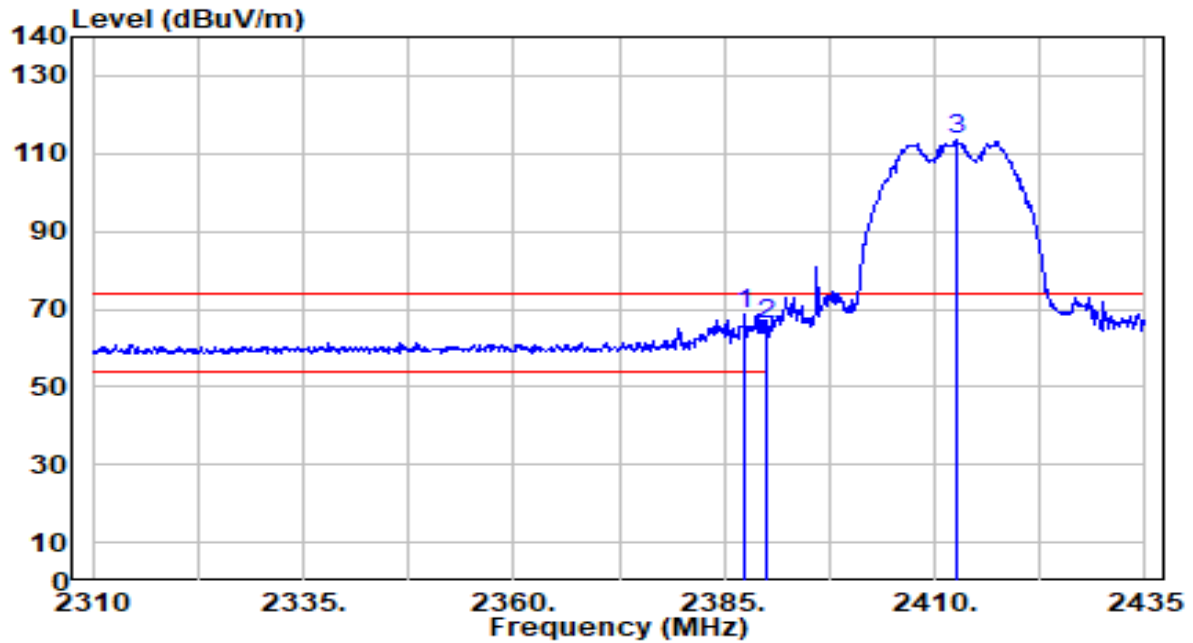


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.500	35.71	32.72	68.43	-5.57	74.00	100	207	Peak
2		2390.000	33.09	32.73	65.81	-8.19	74.00	100	207	Peak
3		2412.625	80.52	32.82	113.34	N/A	N/A	100	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

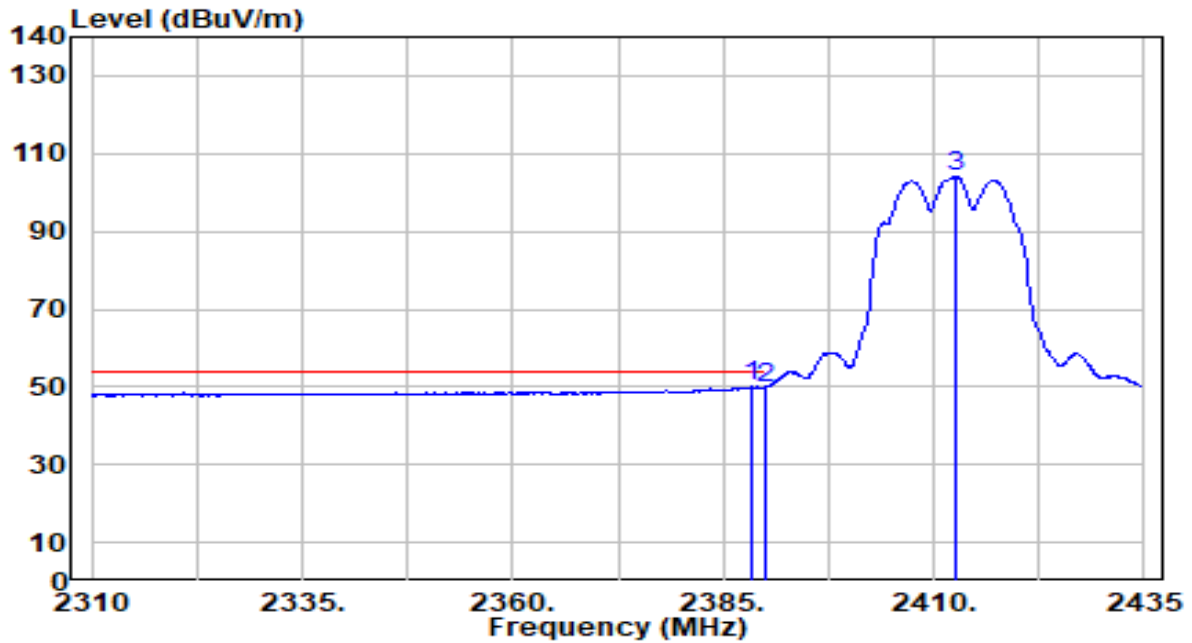


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.250	17.30	32.72	50.02	-3.98	54.00	100	207	Average
2		2390.000	17.18	32.73	49.90	-4.10	54.00	100	207	Average
3		2412.750	71.24	32.82	104.05	N/A	N/A	100	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

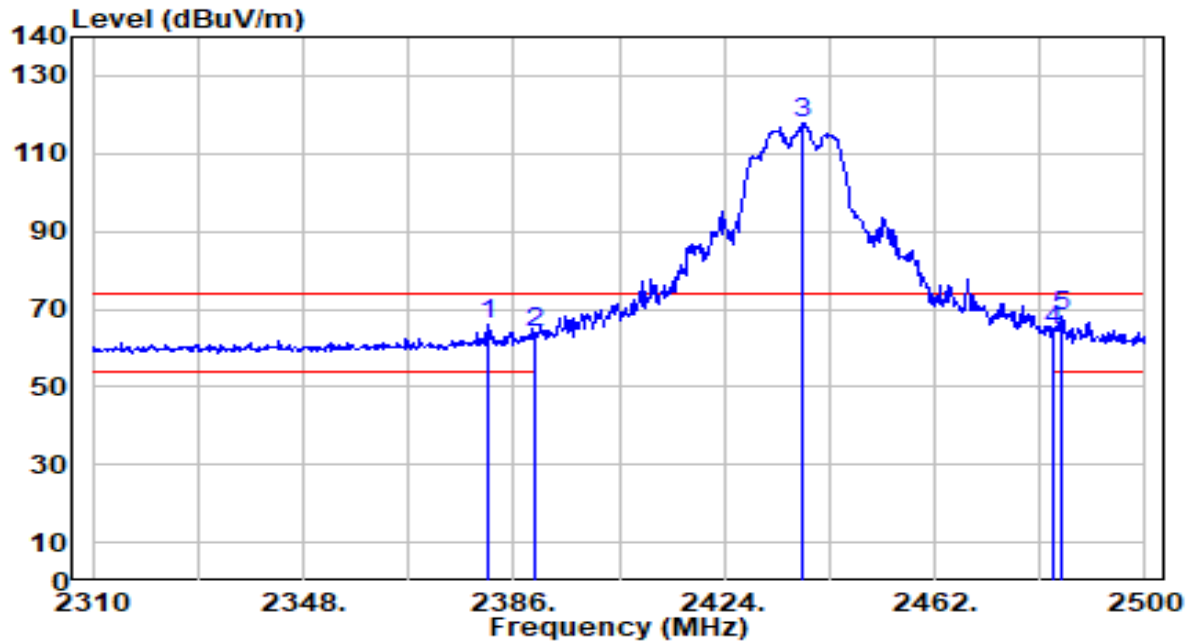


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2381.250	33.44	32.69	66.13	-7.87	74.00	202	240	Peak
2	2390.000	31.29	32.73	64.02	-9.98	74.00	202	240	Peak
3	2438.250	84.72	32.92	117.64	N/A	N/A	202	240	Peak
4	2483.500	31.29	33.09	64.38	-9.62	74.00	202	240	Peak
5	* 2484.990	35.13	33.10	68.23	-5.77	74.00	202	240	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

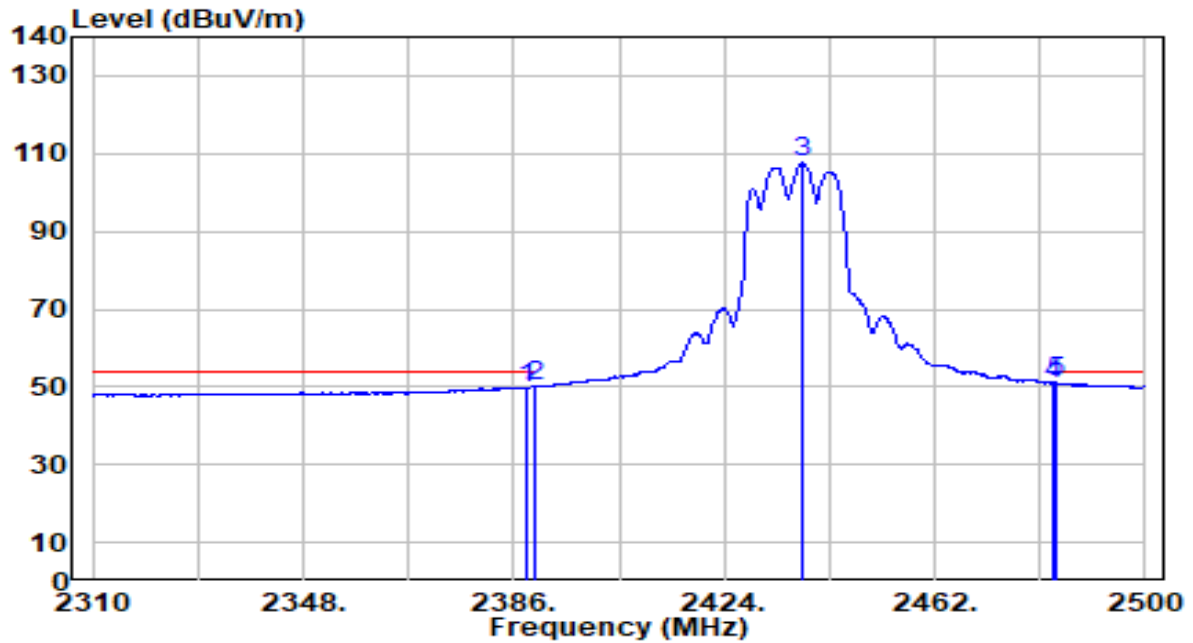


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	17.13	32.72	49.85	-4.15	54.00	202	240	Average
2	2390.000	17.32	32.73	50.05	-3.95	54.00	202	240	Average
3	2438.060	74.93	32.92	107.84	N/A	N/A	202	240	Average
4	2483.500	17.70	33.09	50.79	-3.21	54.00	202	240	Average
5	* 2484.040	17.89	33.10	50.99	-3.01	54.00	202	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

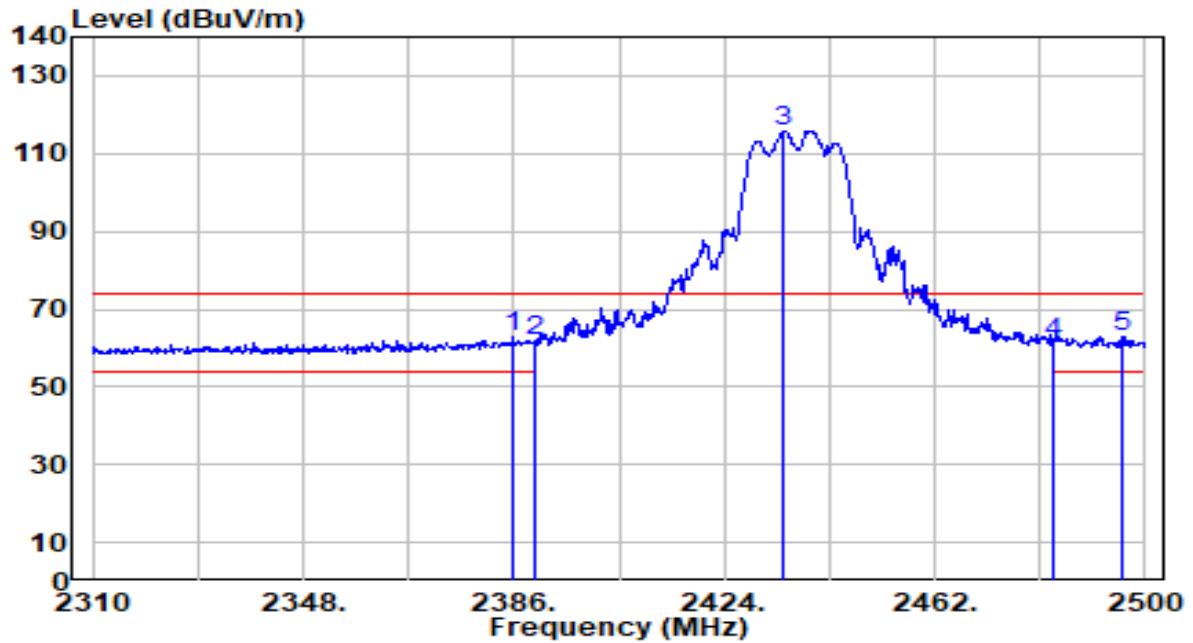


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.000	30.36	32.71	63.07	-10.93	74.00	100	207	Peak
2		2390.000	28.96	32.73	61.69	-12.31	74.00	100	207	Peak
3		2434.640	82.82	32.90	115.73	N/A	N/A	100	207	Peak
4		2483.500	28.10	33.09	61.20	-12.80	74.00	100	207	Peak
5		2495.630	29.91	33.14	63.06	-10.94	74.00	100	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

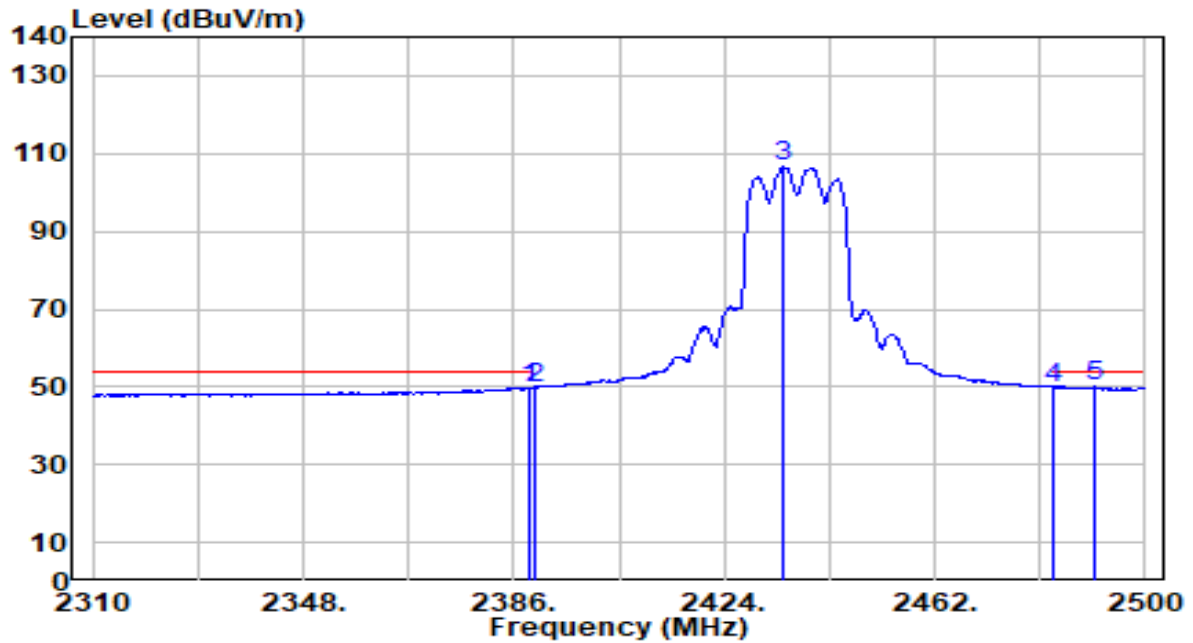


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	17.06	32.72	49.78	-4.22	54.00	100	207	Average
2	2390.000	17.07	32.73	49.79	-4.21	54.00	100	207	Average
3	2434.830	73.61	32.90	106.51	N/A	N/A	100	207	Average
4	2483.500	16.76	33.09	49.85	-4.15	54.00	100	207	Average
5	* 2490.880	16.96	33.12	50.08	-3.92	54.00	100	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

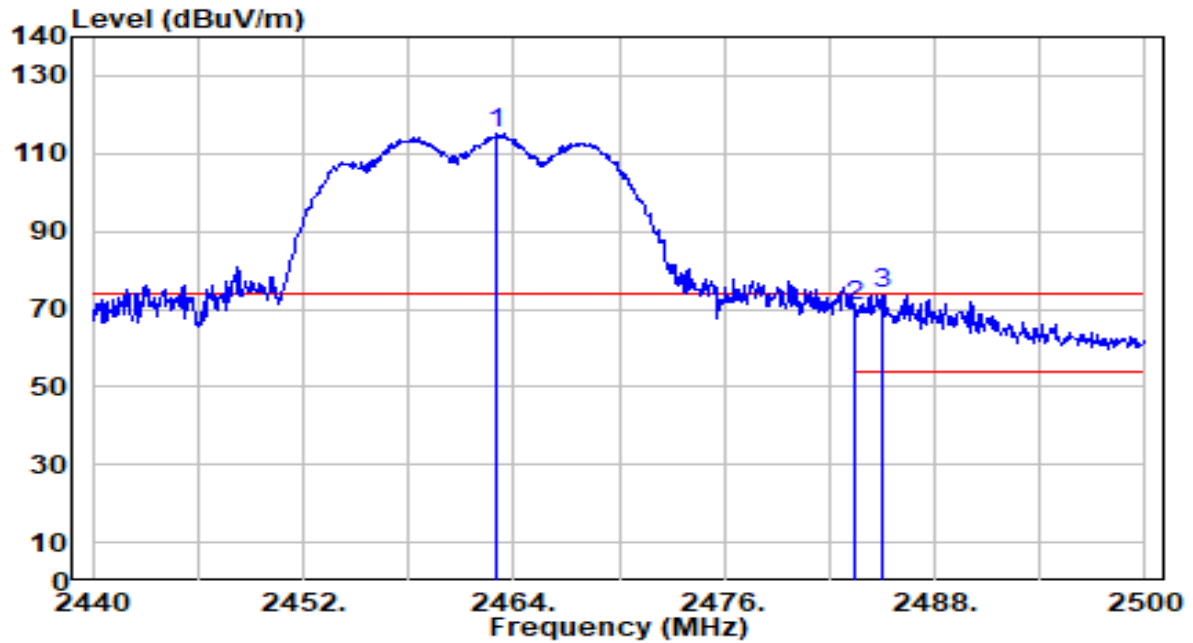


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	82.26	33.01	115.28	N/A	N/A	200	241	Peak
2	2483.500	37.73	33.09	70.83	-3.17	74.00	200	241	Peak
3	* 2485.060	40.77	33.10	73.87	-0.13	74.00	200	241	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

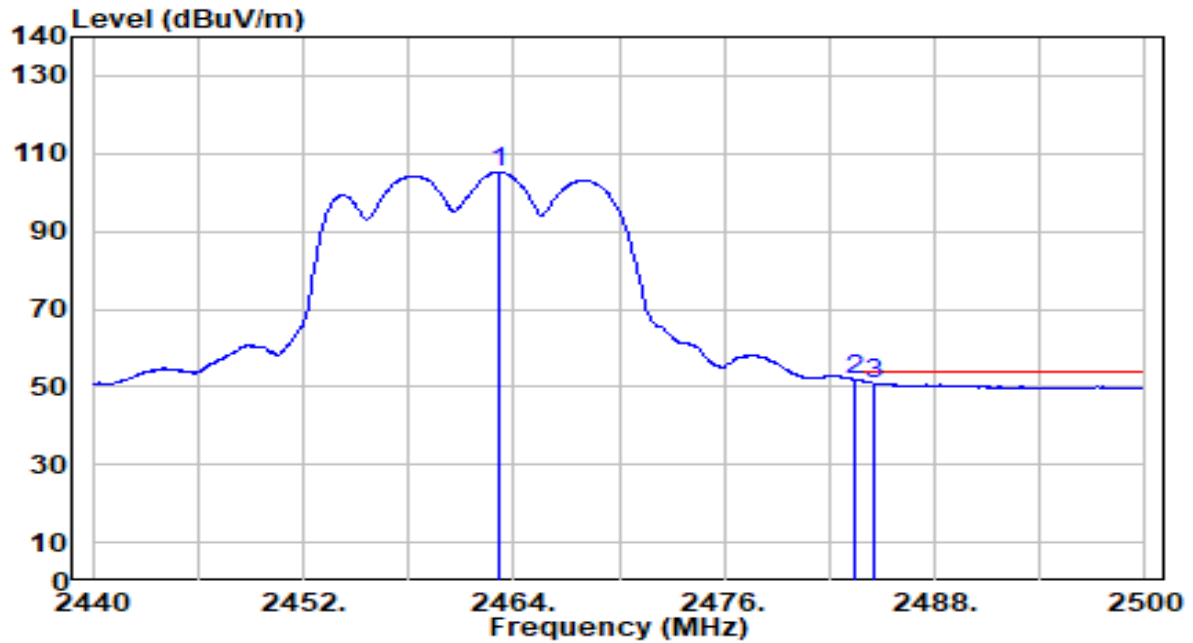


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.100	72.24	33.01	105.25	N/A	N/A	200	241	Average
2	*	2483.500	18.80	33.09	51.90	-2.10	54.00	200	241	Average
3		2484.580	17.88	33.10	50.98	-3.02	54.00	200	241	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

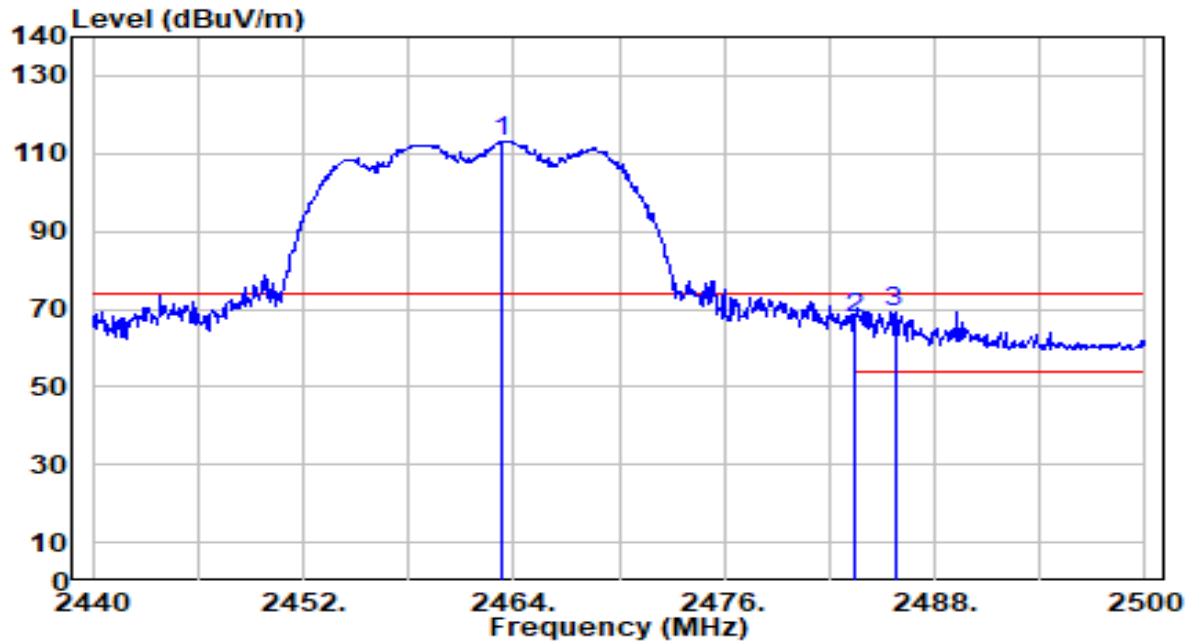


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.340	80.19	33.02	113.20	N/A	N/A	100	186	Peak
2	2483.500	34.71	33.09	67.80	-6.20	74.00	100	186	Peak
3	* 2485.720	36.14	33.10	69.24	-4.76	74.00	100	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

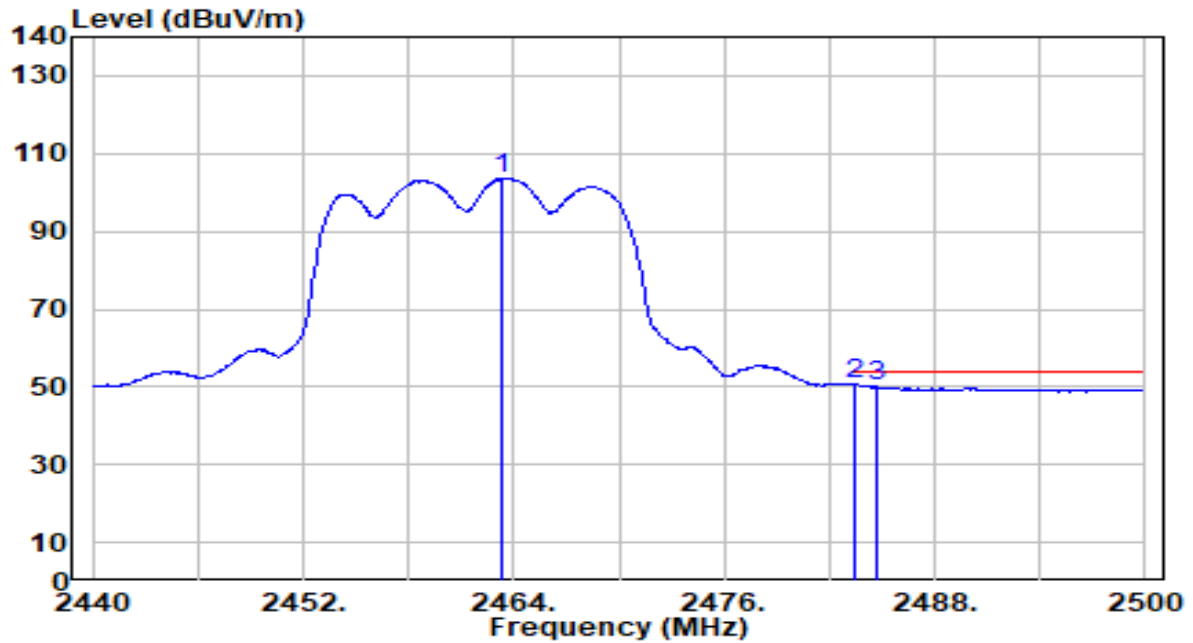


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.340	70.69	33.02	103.71	N/A	N/A	100	186	Average
2	*	2483.500	17.51	33.09	50.61	-3.39	54.00	100	186	Average
3		2484.640	16.91	33.10	50.01	-3.99	54.00	100	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

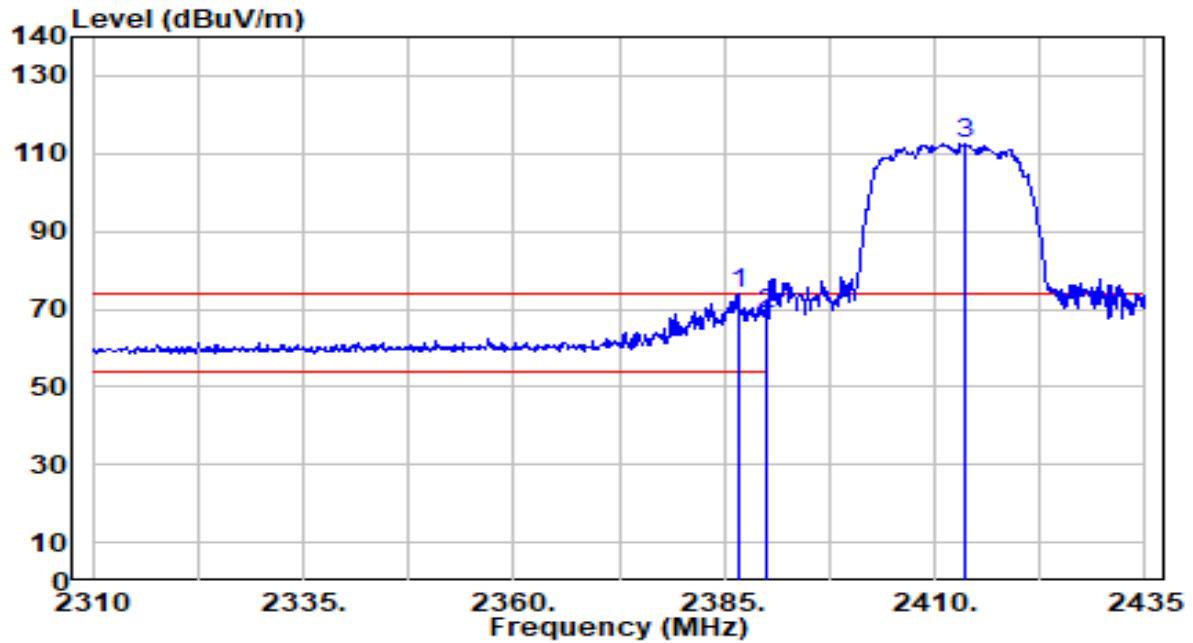


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.625	41.10	32.71	73.81	-0.19	74.00	202	242	Peak
2		2390.000	36.05	32.73	68.78	-5.22	74.00	202	242	Peak
3		2413.625	79.82	32.82	112.64	N/A	N/A	202	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

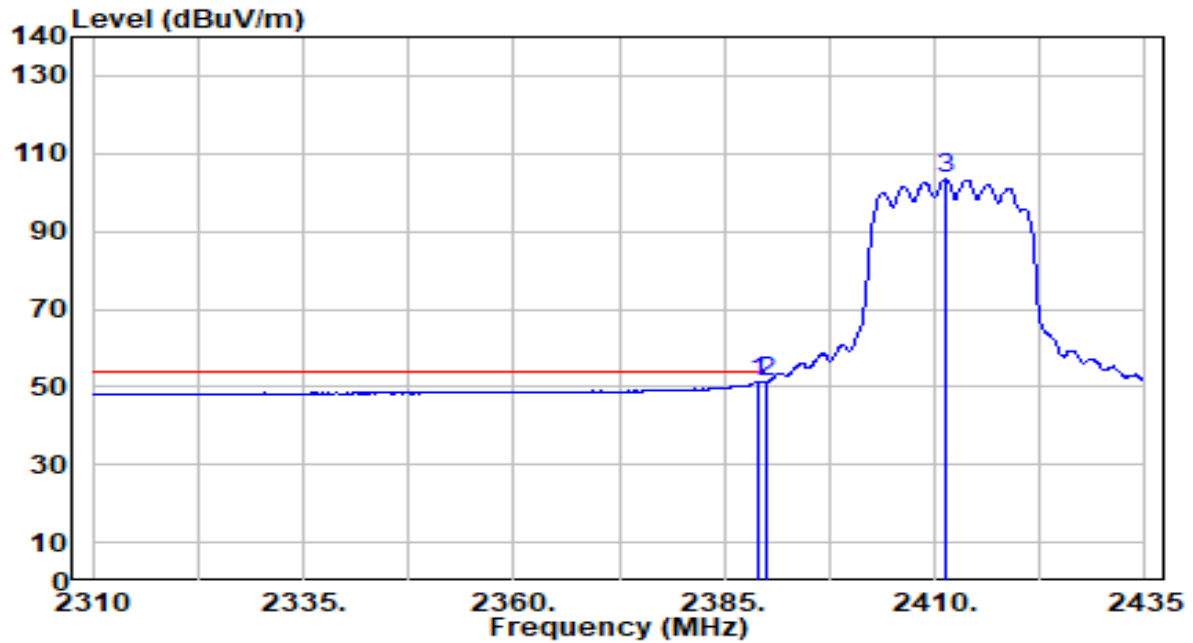


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	18.58	32.72	51.31	-2.69	54.00	202	242	Average
2		2390.000	18.51	32.73	51.24	-2.76	54.00	202	242	Average
3		2411.375	70.51	32.81	103.33	N/A	N/A	202	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

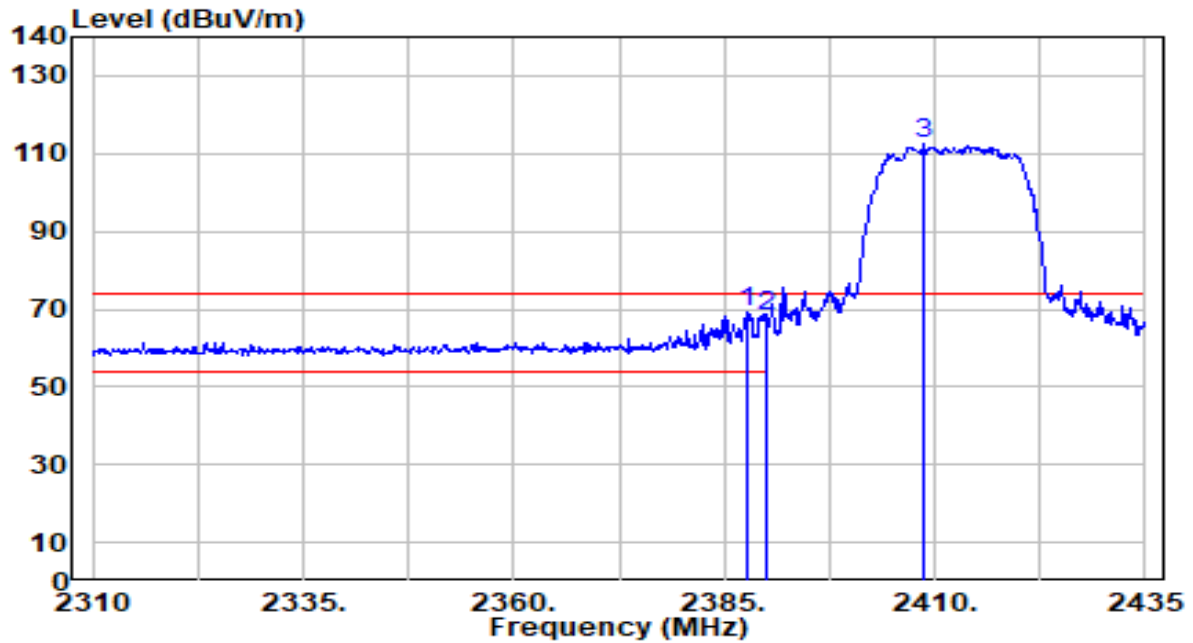


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.625	36.38	32.72	69.10	-4.90	74.00	100	207	Peak
2		2390.000	35.59	32.73	68.31	-5.69	74.00	100	207	Peak
3		2408.625	79.63	32.80	112.43	N/A	N/A	100	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

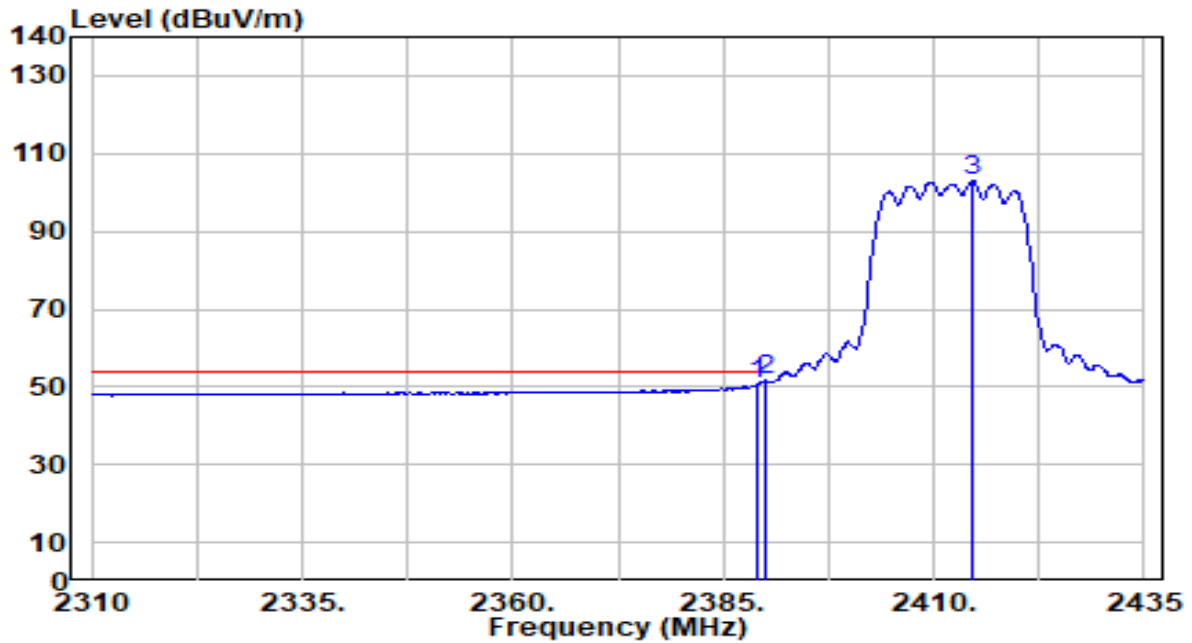


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	17.82	32.72	50.54	-3.46	54.00	100	207	Average
2	*	2390.000	18.81	32.73	51.53	-2.47	54.00	100	207	Average
3		2414.625	70.11	32.82	102.94	N/A	N/A	100	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

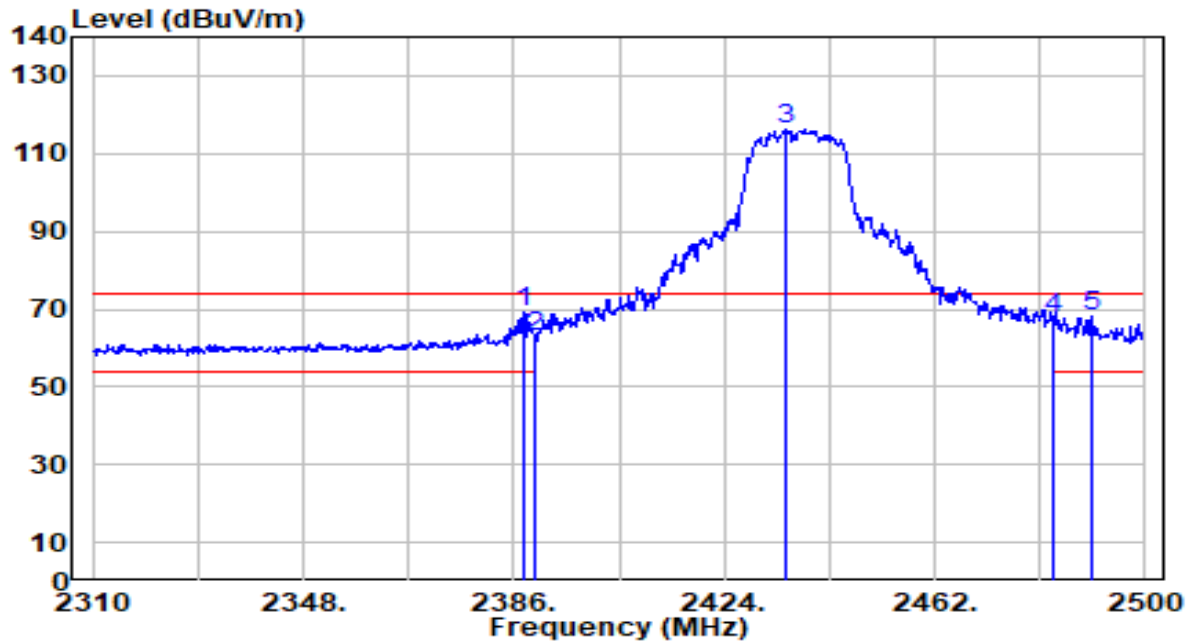


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.710	36.23	32.72	68.95	-5.05	74.00	202	241	Peak
2		2390.000	30.25	32.73	62.97	-11.03	74.00	202	241	Peak
3		2435.210	83.57	32.90	116.48	N/A	N/A	202	241	Peak
4		2483.500	34.73	33.09	67.82	-6.18	74.00	202	241	Peak
5		2490.310	35.11	33.12	68.23	-5.77	74.00	202	241	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

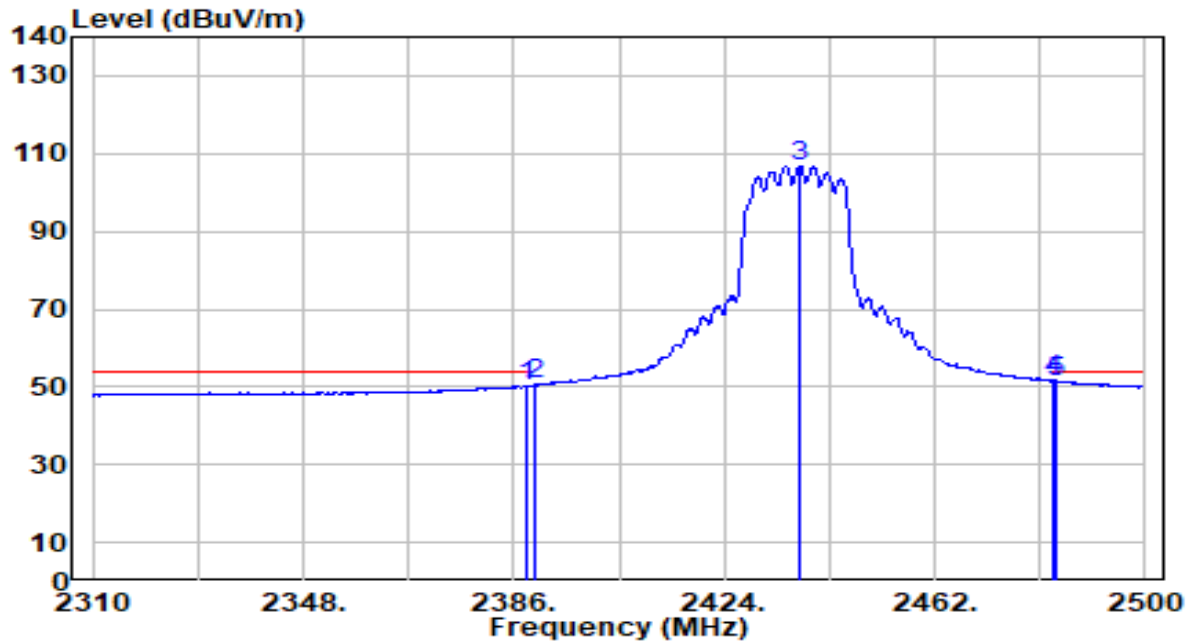


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	17.49	32.72	50.21	-3.79	54.00	202	241	Average
2	2390.000	17.77	32.73	50.50	-3.50	54.00	202	241	Average
3	2437.680	73.90	32.91	106.82	N/A	N/A	202	241	Average
4	* 2483.500	18.46	33.09	51.56	-2.44	54.00	202	241	Average
5	2484.040	18.22	33.10	51.32	-2.68	54.00	202	241	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

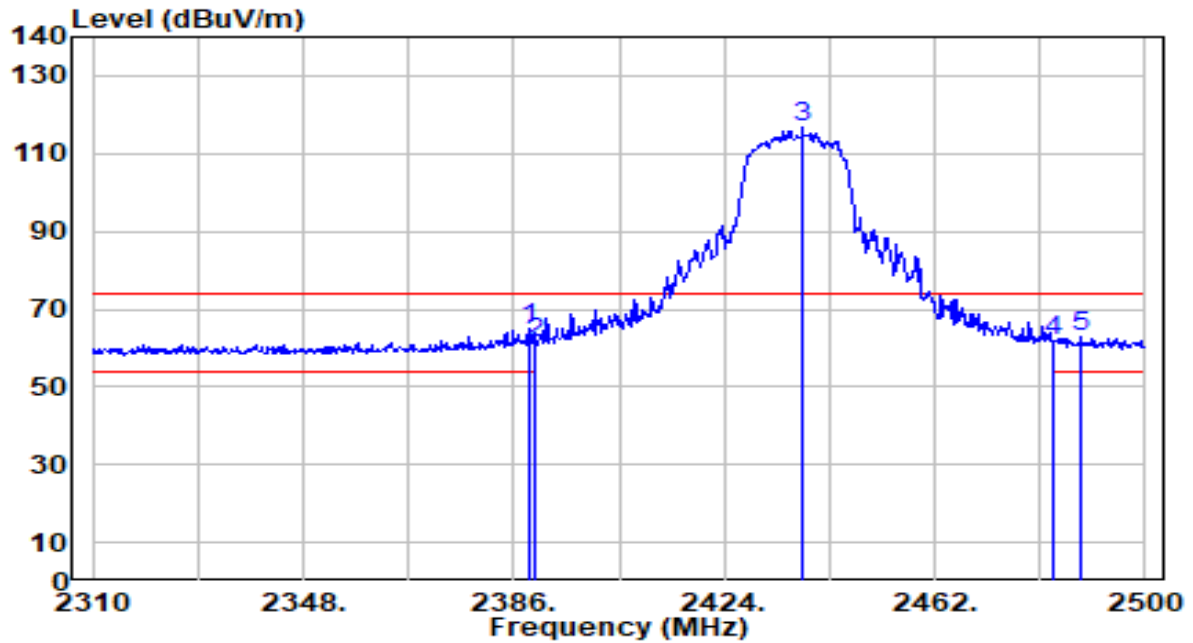


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	32.44	32.72	65.17	-8.83	74.00	100	207	Peak
2		2390.000	28.62	32.73	61.34	-12.66	74.00	100	207	Peak
3		2438.060	83.71	32.92	116.62	N/A	N/A	100	207	Peak
4		2483.500	28.77	33.09	61.86	-12.14	74.00	100	207	Peak
5		2488.410	29.66	33.11	62.77	-11.23	74.00	100	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

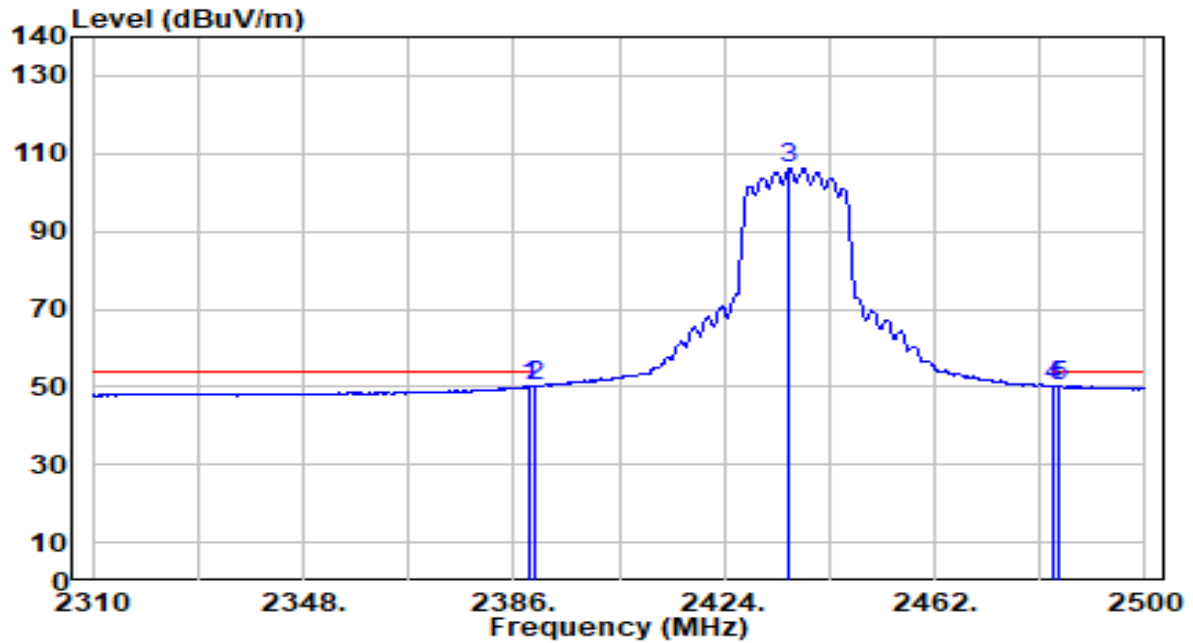


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	17.38	32.72	50.10	-3.90	54.00	100	207	Average
2	2390.000	17.27	32.73	50.00	-4.00	54.00	100	207	Average
3	2435.780	73.29	32.91	106.19	N/A	N/A	100	207	Average
4	2483.500	17.14	33.09	50.23	-3.77	54.00	100	207	Average
5	* 2484.230	17.20	33.10	50.30	-3.70	54.00	100	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

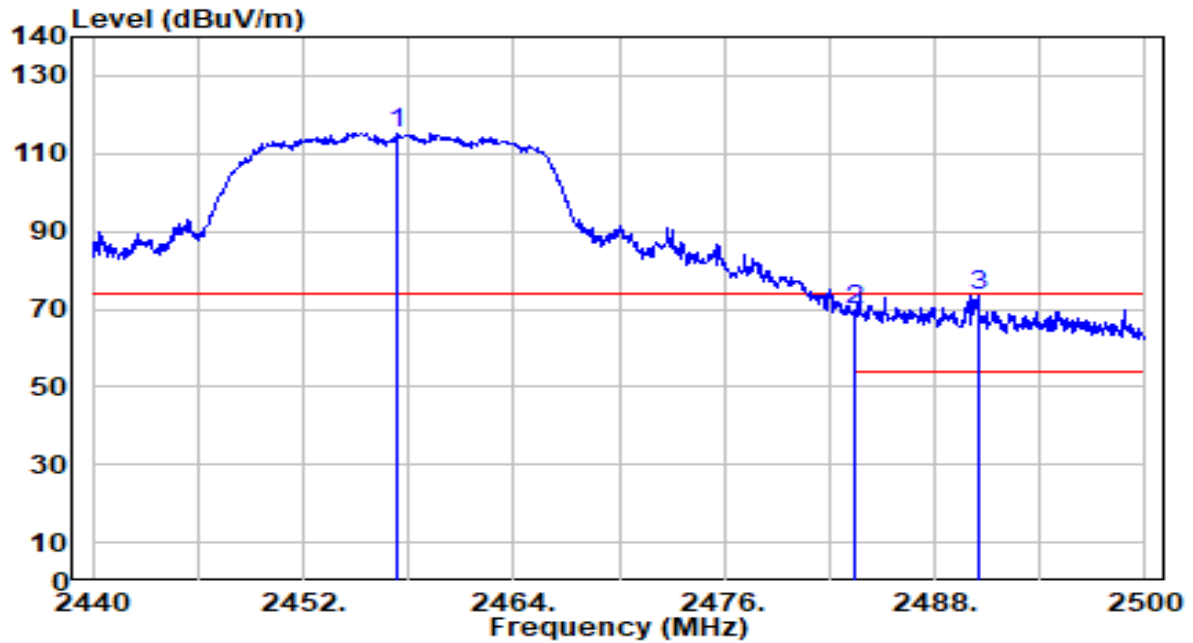


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.280	82.39	32.99	115.38	N/A	N/A	200	240	Peak
2	2483.500	36.41	33.09	69.51	-4.49	74.00	200	240	Peak
3	* 2490.460	40.14	33.12	73.26	-0.74	74.00	200	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

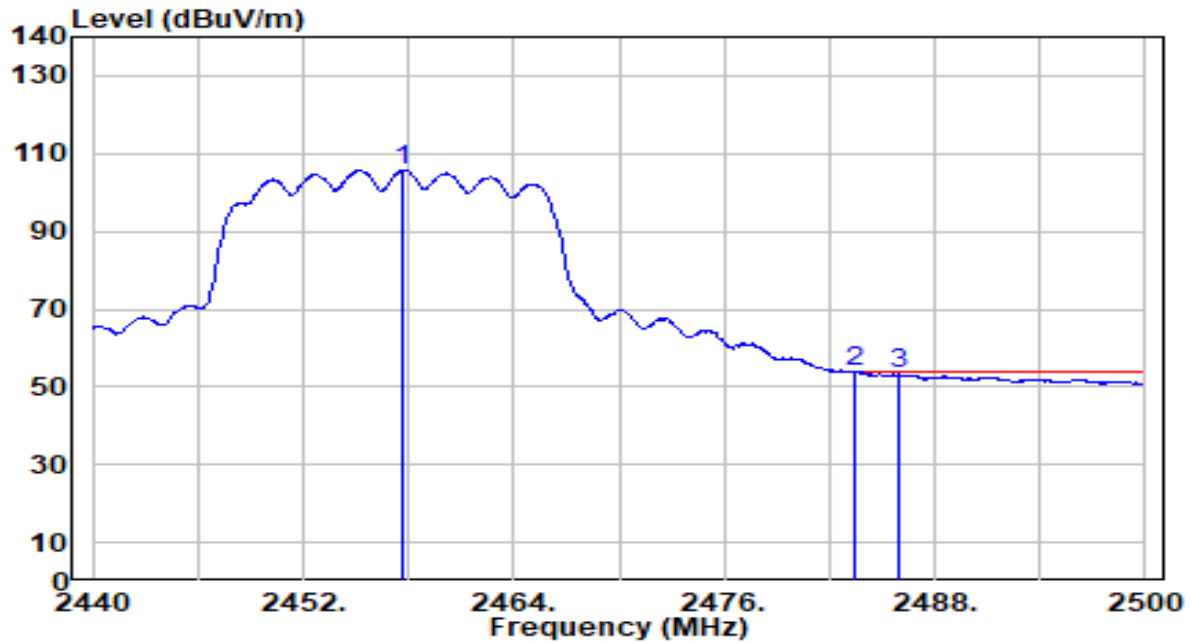


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.700	72.71	32.99	105.71	N/A	N/A	200	240	Average
2	*	2483.500	20.75	33.09	53.84	-0.16	54.00	200	240	Average
3		2486.020	20.08	33.10	53.19	-0.81	54.00	200	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

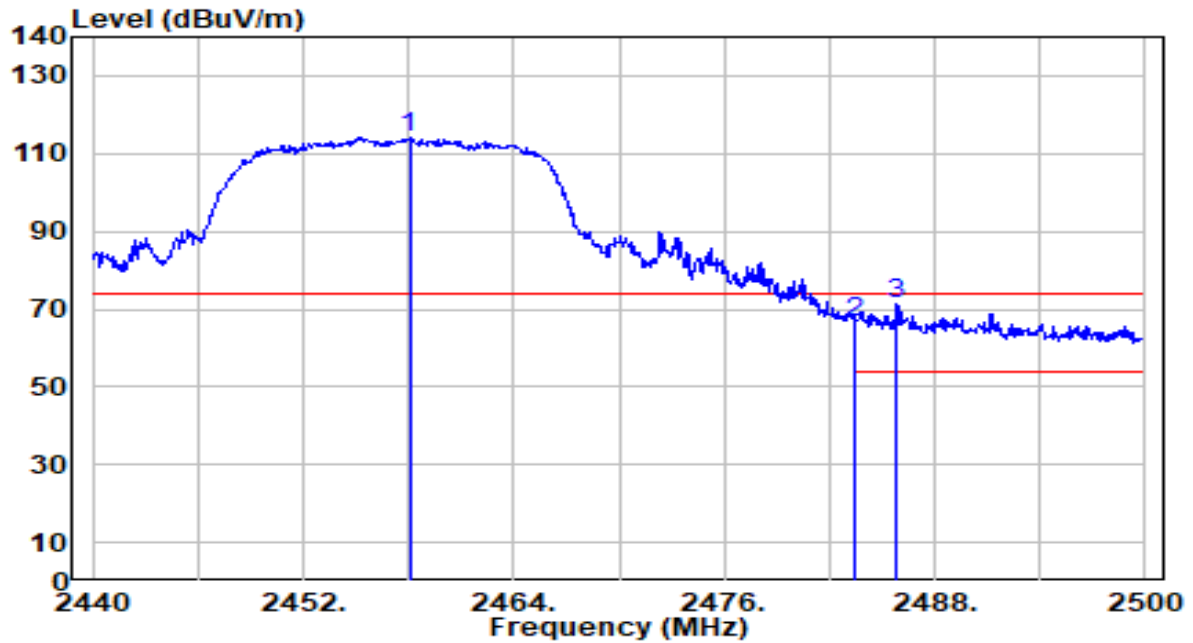


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.060	81.29	32.99	114.28	N/A	N/A	100	188	Peak
2	2483.500	33.24	33.09	66.33	-7.67	74.00	100	188	Peak
3	* 2485.780	38.36	33.10	71.47	-2.53	74.00	100	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

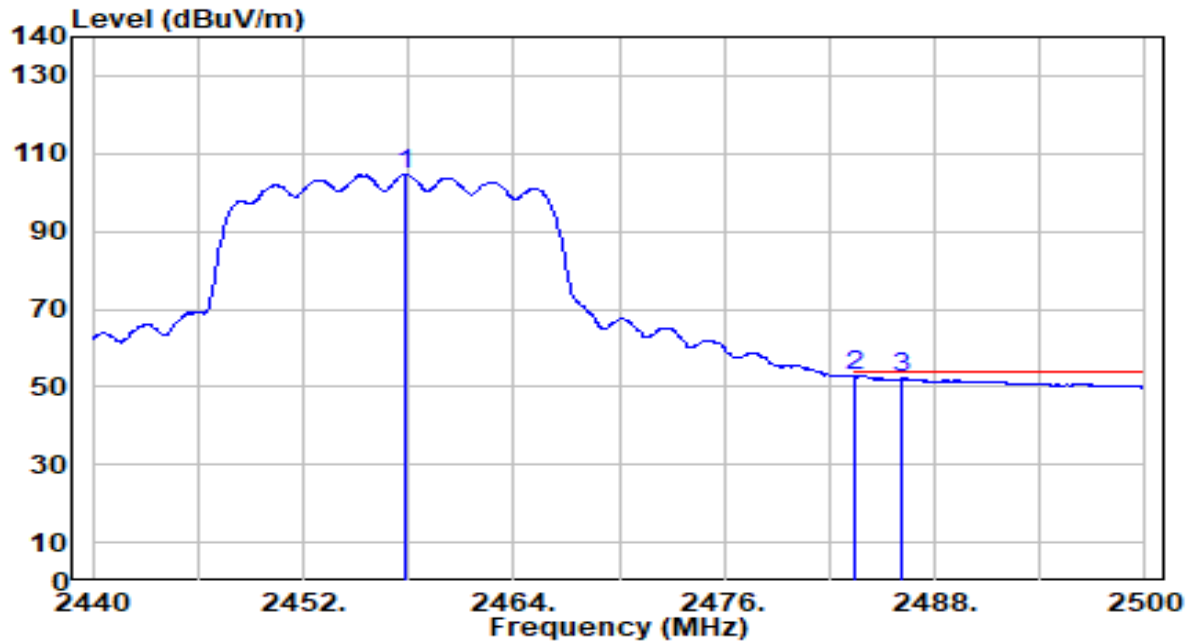


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.760	71.66	32.99	104.66	N/A	N/A	100	188	Average
2	*	2483.500	19.63	33.09	52.72	-1.28	54.00	100	188	Average
3		2486.140	19.11	33.11	52.21	-1.79	54.00	100	188	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

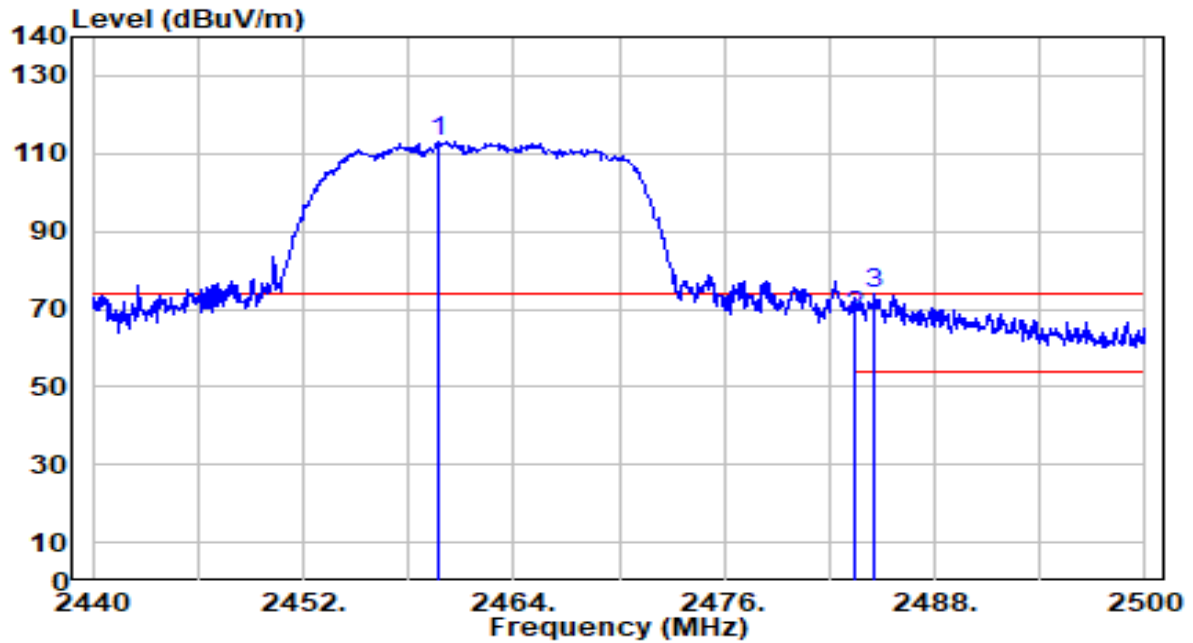


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.680	80.03	33.00	113.04	N/A	N/A	200	239	Peak
2	2483.500	35.13	33.09	68.23	-5.77	74.00	200	239	Peak
3	* 2484.580	40.74	33.10	73.84	-0.16	74.00	200	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

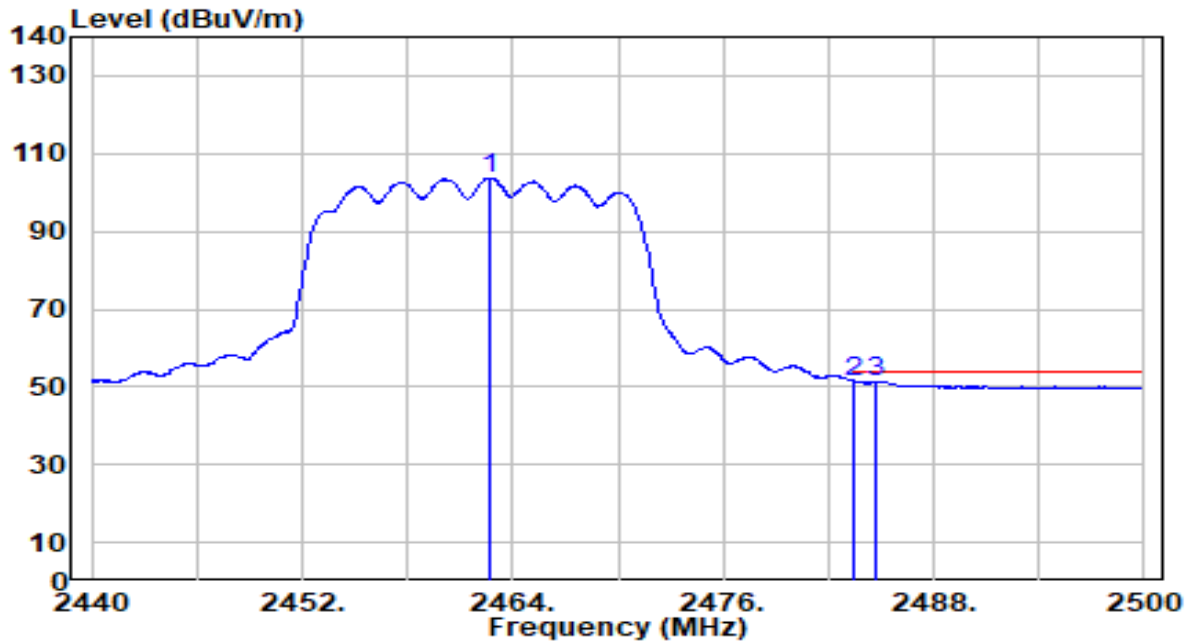


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.680	70.72	33.01	103.73	N/A	N/A	200	239	Average
2		2483.500	18.15	33.09	51.24	-2.76	54.00	200	239	Average
3	*	2484.700	18.36	33.10	51.46	-2.54	54.00	200	239	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

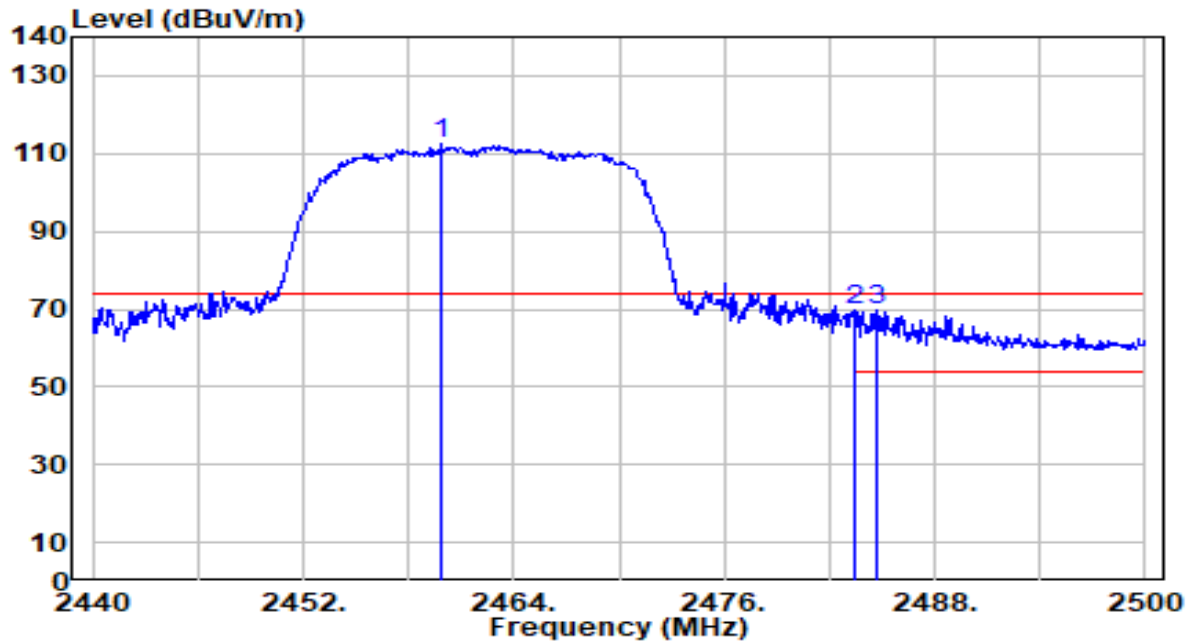


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.920	79.38	33.00	112.38	N/A	N/A	100	186	Peak
2	2483.500	36.73	33.09	69.83	-4.17	74.00	100	186	Peak
3	* 2484.760	36.78	33.10	69.88	-4.12	74.00	100	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

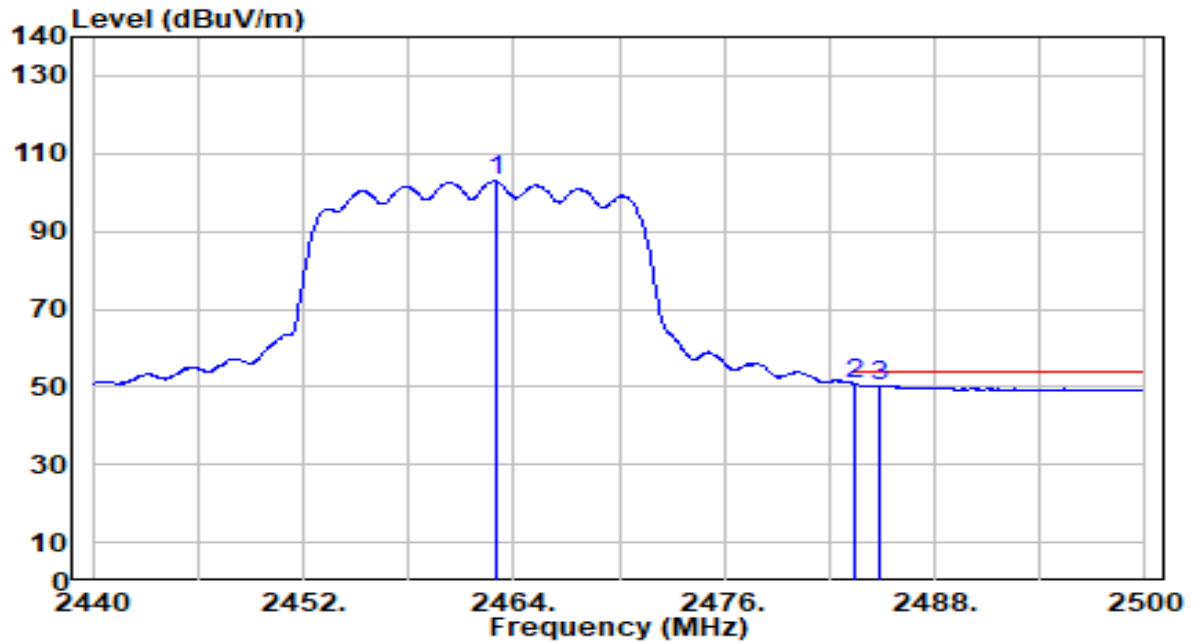


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.980	69.81	33.01	102.83	N/A	N/A	100	186	Average
2	*	2483.500	17.55	33.09	50.64	-3.36	54.00	100	186	Average
3		2484.880	17.32	33.10	50.43	-3.57	54.00	100	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

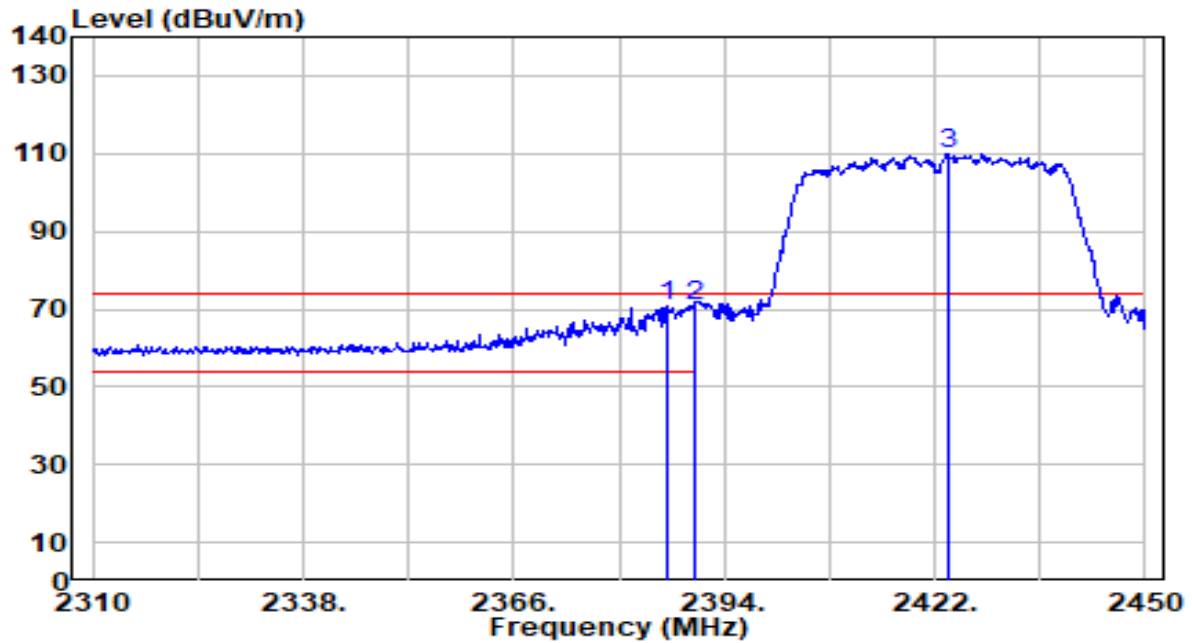


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.580	38.07	32.71	70.79	-3.21	74.00	203	240	Peak
2		2390.000	37.97	32.73	70.69	-3.31	74.00	203	240	Peak
3		2423.960	76.90	32.86	109.76	N/A	N/A	203	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

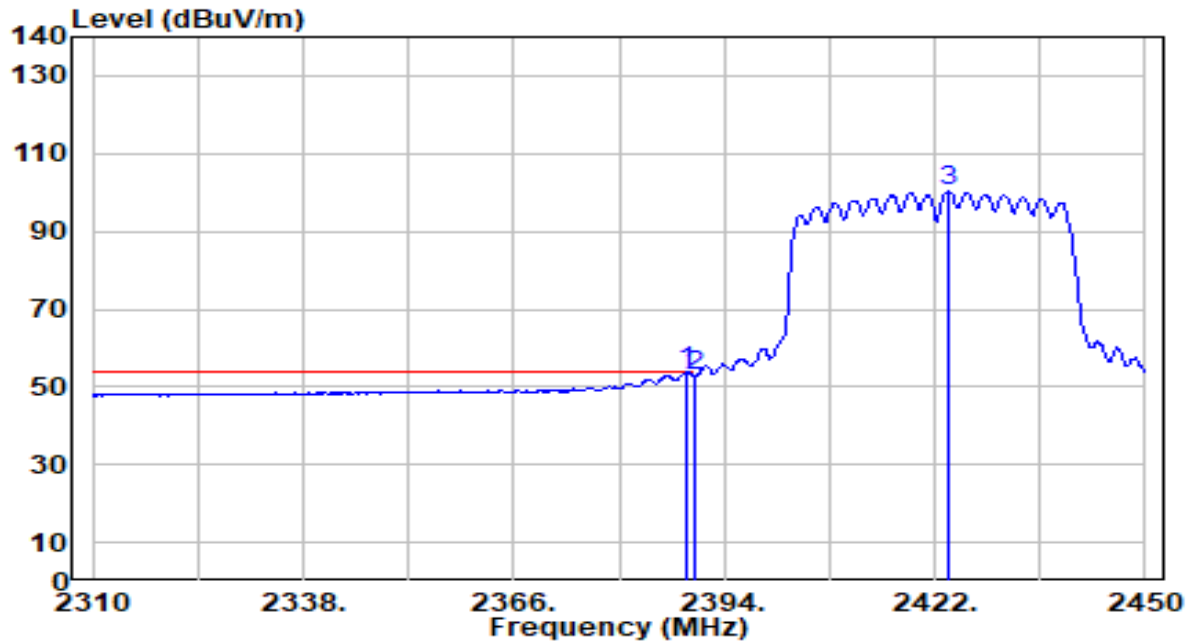


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.960	21.14	32.72	53.86	-0.14	54.00	203	240	Average
2		2390.000	20.08	32.73	52.80	-1.20	54.00	203	240	Average
3		2423.820	67.56	32.86	100.42	N/A	N/A	203	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

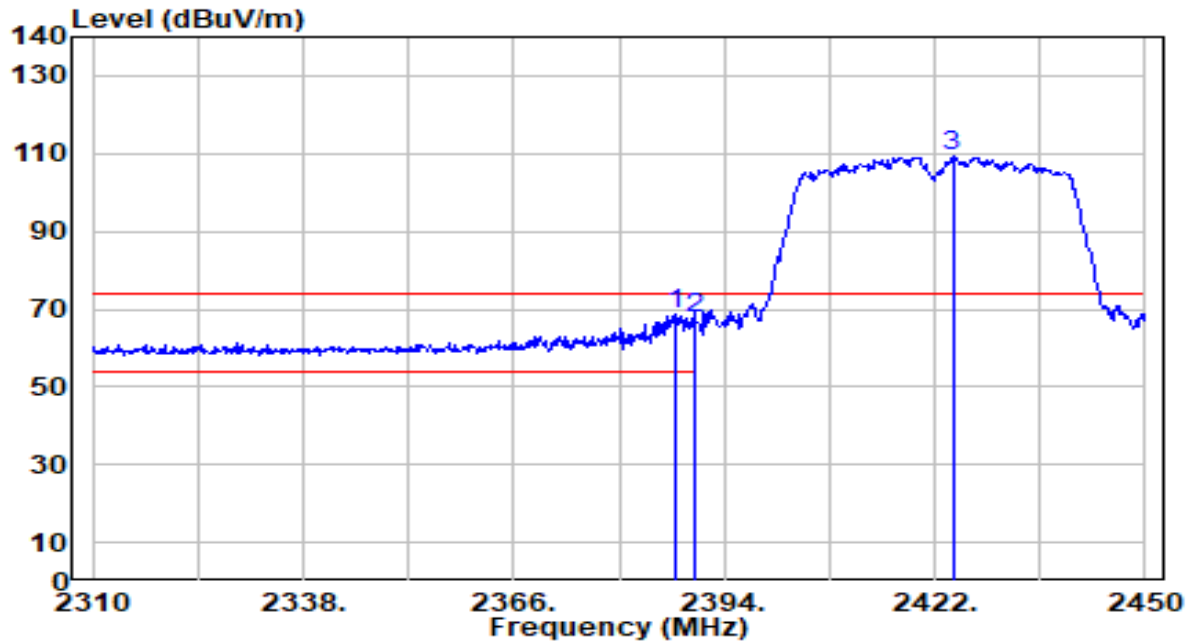


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.420	35.72	32.72	68.43	-5.57	74.00	100	207	Peak
2		2390.000	34.67	32.73	67.40	-6.60	74.00	100	207	Peak
3		2424.380	76.58	32.86	109.44	N/A	N/A	100	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

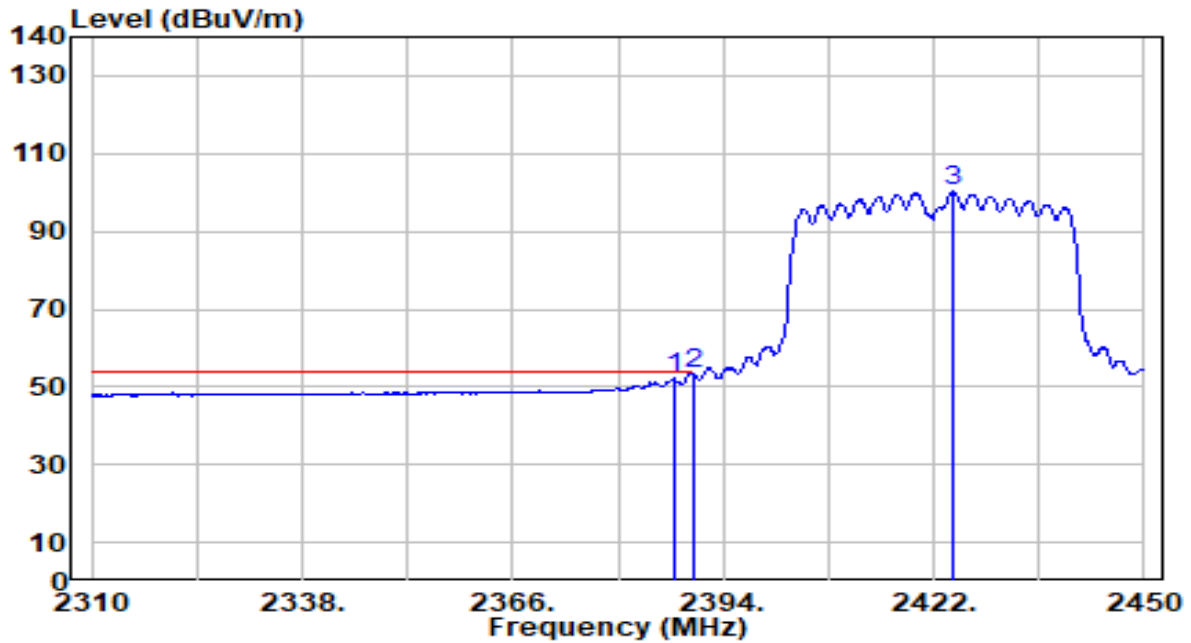


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.420	19.35	32.72	52.07	-1.93	54.00	100	207	Average
2	*	2390.000	20.67	32.73	53.39	-0.61	54.00	100	207	Average
3		2424.520	67.31	32.86	100.17	N/A	N/A	100	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

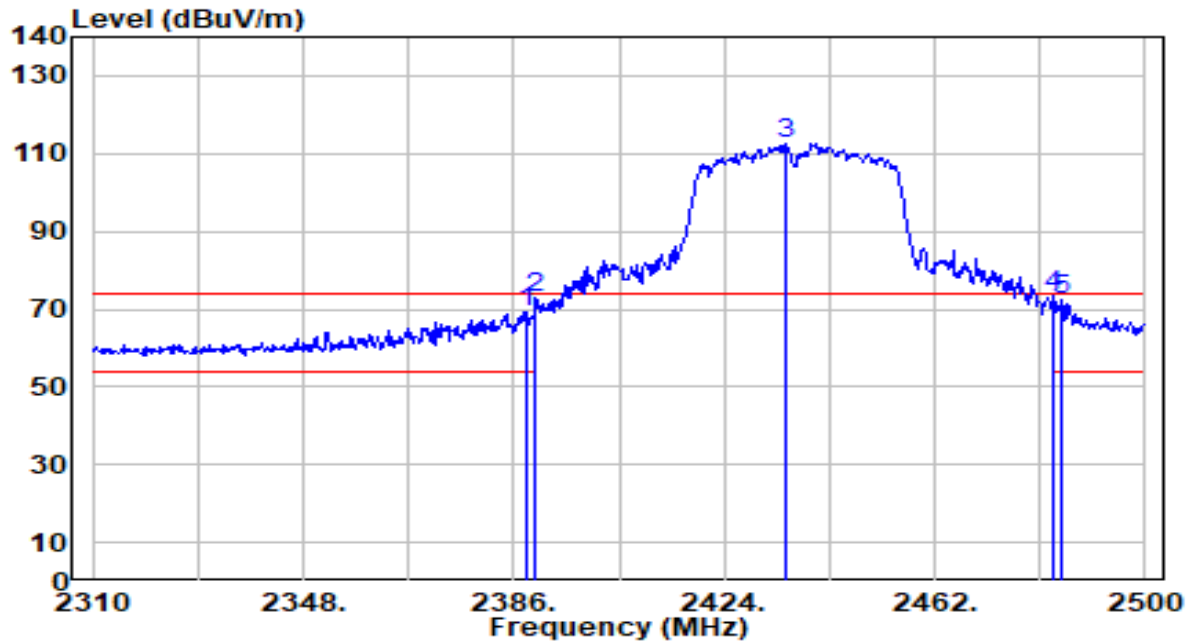


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	36.48	32.72	69.20	-4.80	74.00	202	240	Peak
2	2390.000	40.16	32.73	72.88	-1.12	74.00	202	240	Peak
3	2435.020	79.55	32.90	112.46	N/A	N/A	202	240	Peak
4	* 2483.500	40.47	33.09	73.56	-0.44	74.00	202	240	Peak
5	2484.990	39.30	33.10	72.40	-1.60	74.00	202	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

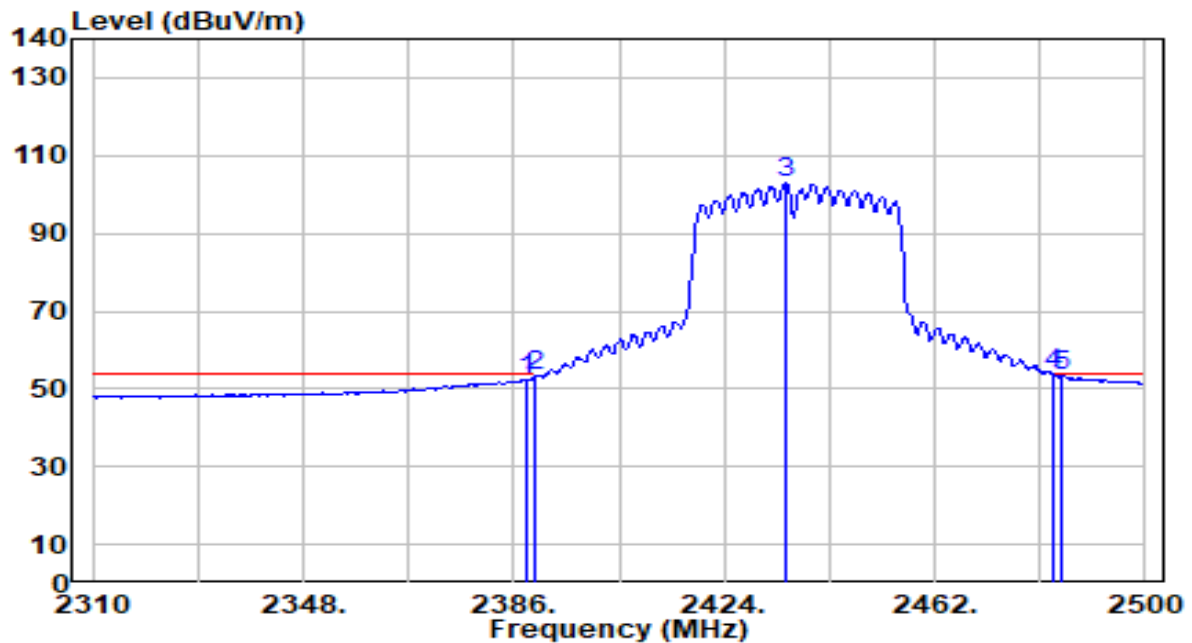


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	19.72	32.72	52.44	-1.56	54.00	202	240	Average
2	2390.000	20.42	32.73	53.15	-0.85	54.00	202	240	Average
3	2435.210	69.88	32.90	102.78	N/A	N/A	202	240	Average
4	* 2483.500	20.80	33.09	53.90	-0.10	54.00	202	240	Average
5	2484.990	20.17	33.10	53.27	-0.73	54.00	202	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

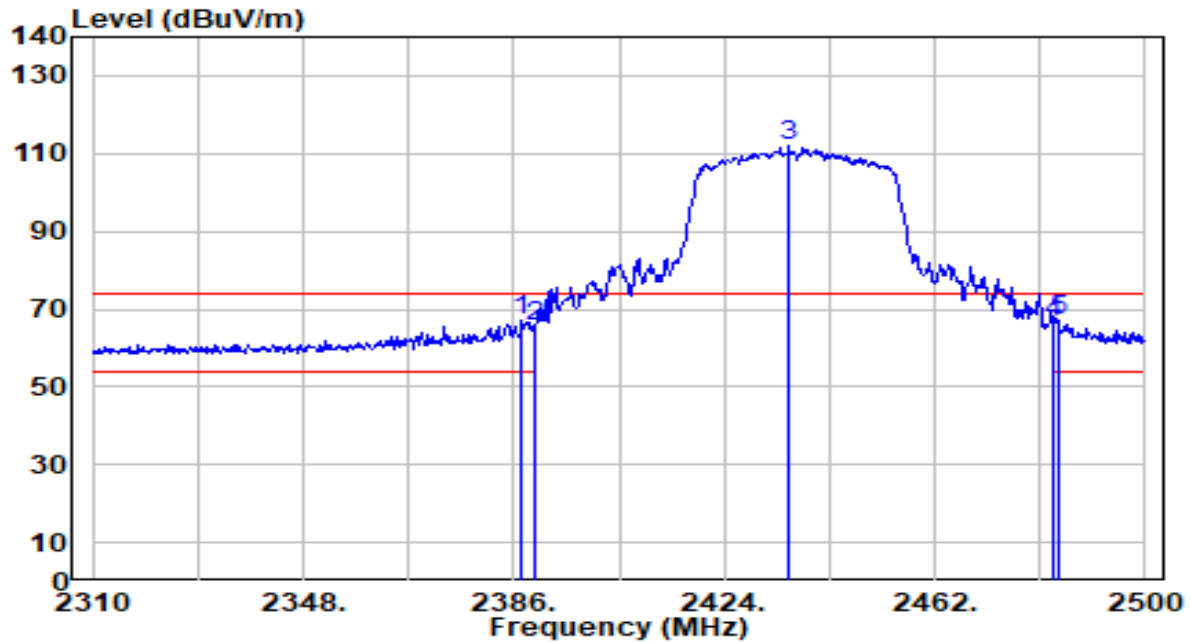


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.520	34.64	32.72	67.35	-6.65	74.00	100	207	Peak
2		2390.000	32.71	32.73	65.44	-8.56	74.00	100	207	Peak
3		2435.590	78.87	32.91	111.78	N/A	N/A	100	207	Peak
4		2483.500	33.44	33.09	66.53	-7.47	74.00	100	207	Peak
5		2484.230	33.81	33.10	66.90	-7.10	74.00	100	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

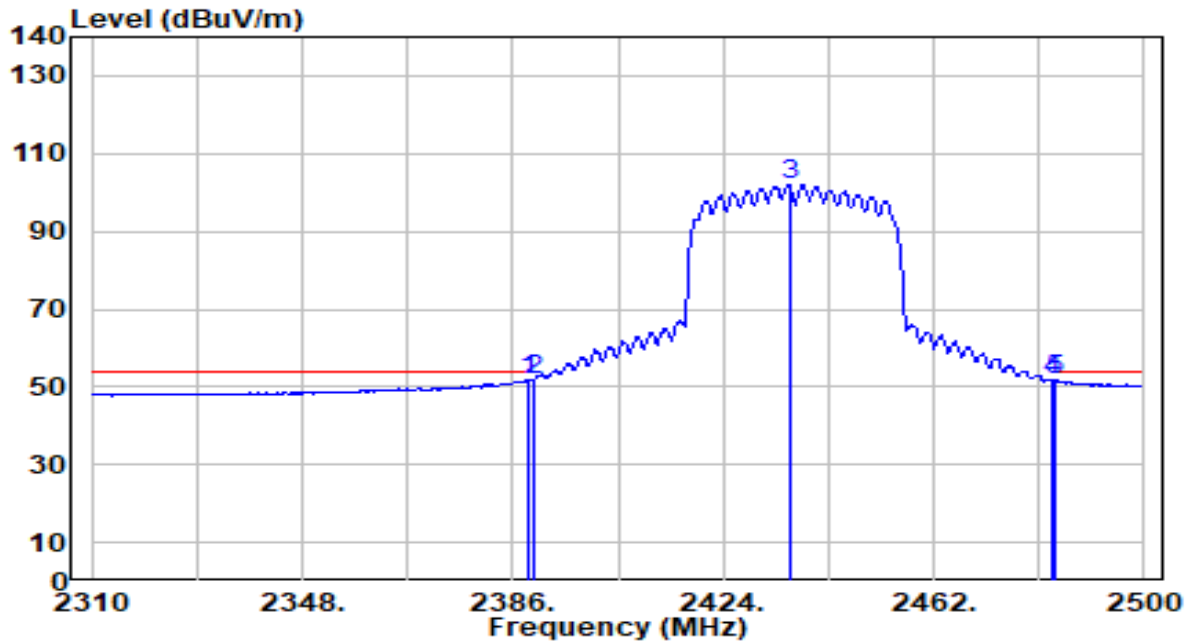


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.850	19.08	32.72	51.80	-2.20	54.00	100	207	Average
2	*	2390.000	19.15	32.73	51.88	-2.12	54.00	100	207	Average
3		2435.970	69.25	32.91	102.16	N/A	N/A	100	207	Average
4		2483.500	18.59	33.09	51.69	-2.31	54.00	100	207	Average
5		2484.040	18.60	33.10	51.70	-2.30	54.00	100	207	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

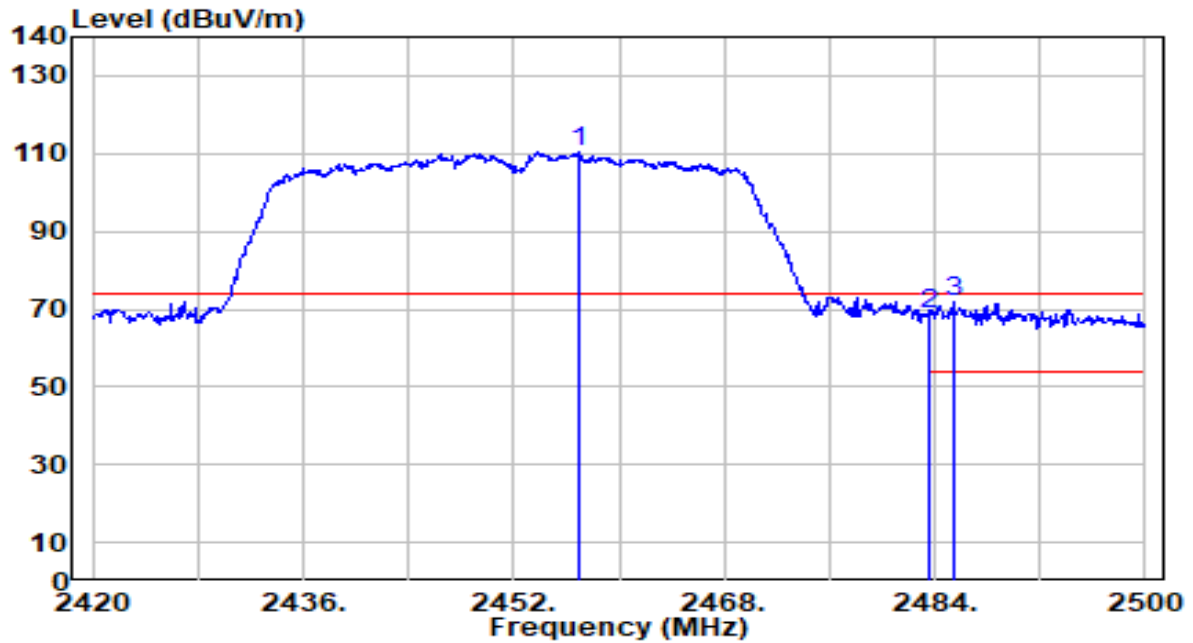


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.040	77.34	32.99	110.33	N/A	N/A	200	240	Peak
2	2483.500	35.70	33.09	68.80	-5.20	74.00	200	240	Peak
3	* 2485.440	38.86	33.10	71.96	-2.04	74.00	200	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

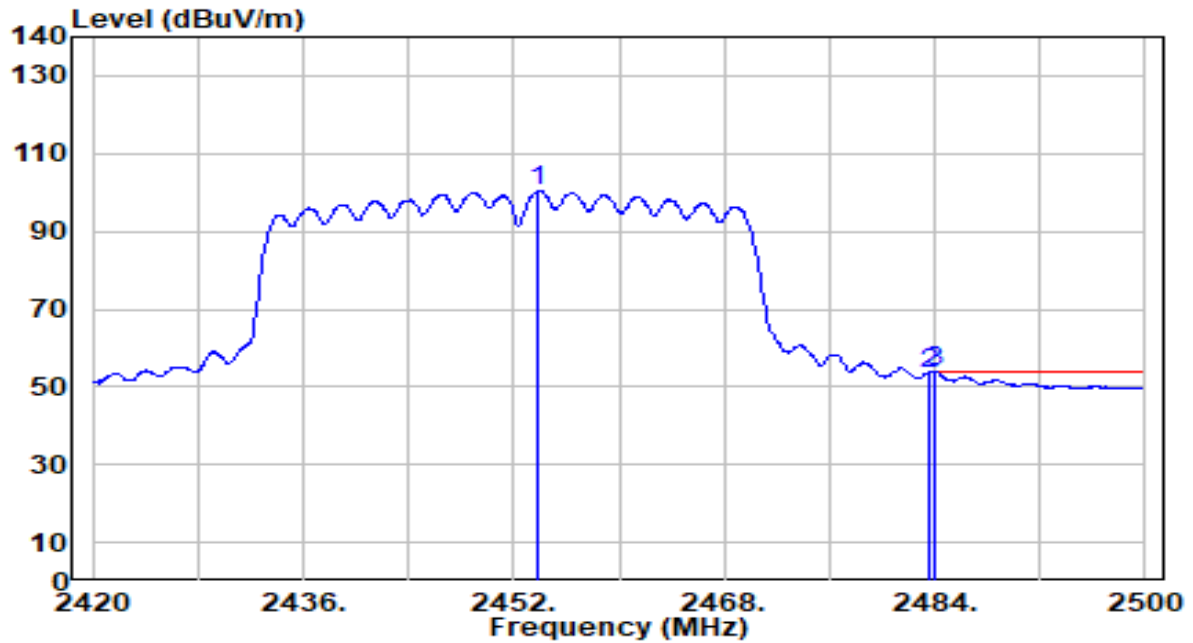


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.920	67.45	32.98	100.42	N/A	N/A	200	240	Average
2	2483.500	20.43	33.09	53.52	-0.48	54.00	200	240	Average
3	* 2483.920	20.80	33.10	53.90	-0.10	54.00	200	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

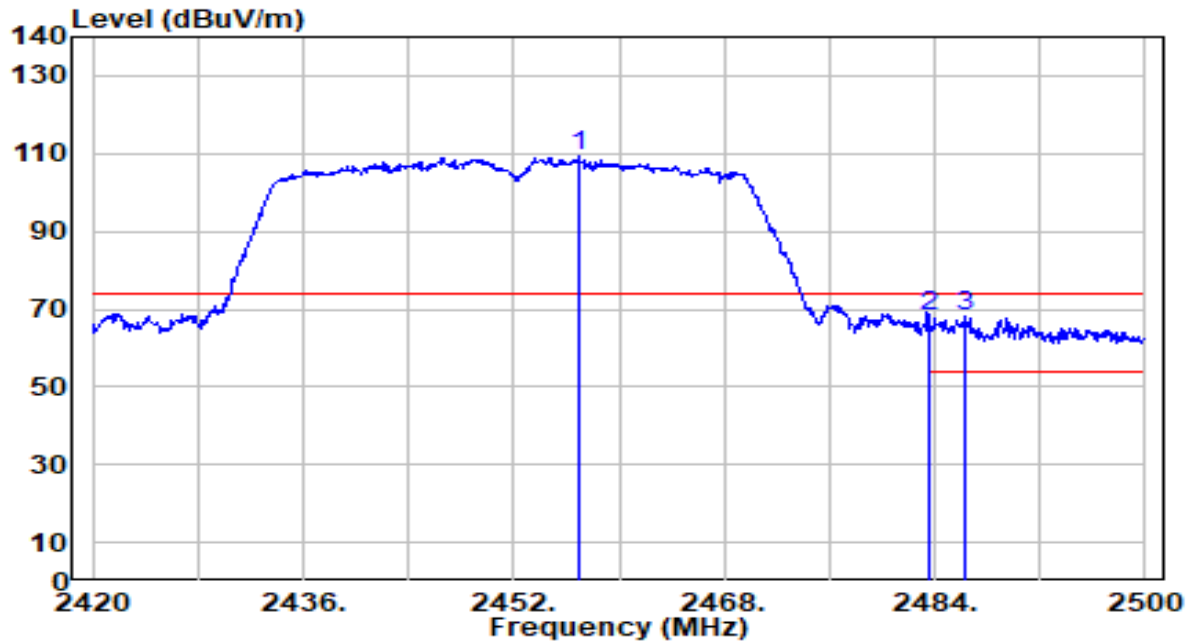


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.960	76.15	32.99	109.14	N/A	N/A	100	187	Peak
2	2483.500	34.85	33.09	67.94	-6.06	74.00	100	187	Peak
3	* 2486.320	34.91	33.11	68.01	-5.99	74.00	100	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

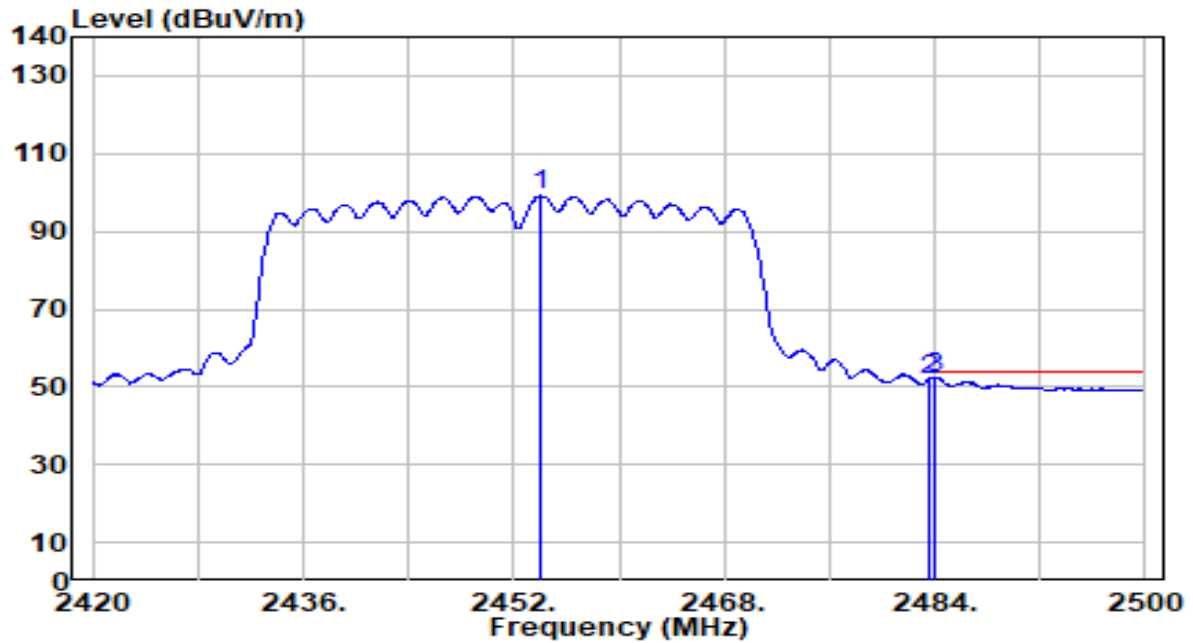


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.080	66.23	32.98	99.21	N/A	N/A	100	187	Average
2	2483.500	18.72	33.09	51.82	-2.18	54.00	100	187	Average
3	* 2484.080	19.34	33.10	52.43	-1.57	54.00	100	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

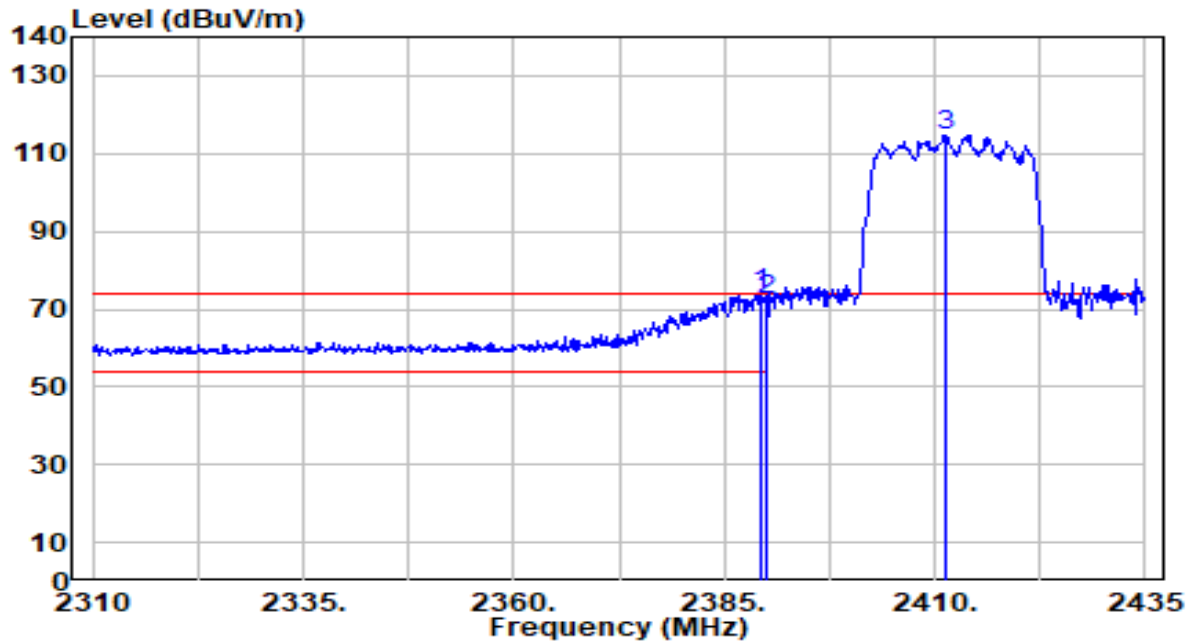


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.375	41.14	32.72	73.87	-0.13	74.00	203	240	Peak
2		2390.000	39.46	32.73	72.19	-1.81	74.00	203	240	Peak
3		2411.250	81.98	32.81	114.79	N/A	N/A	203	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

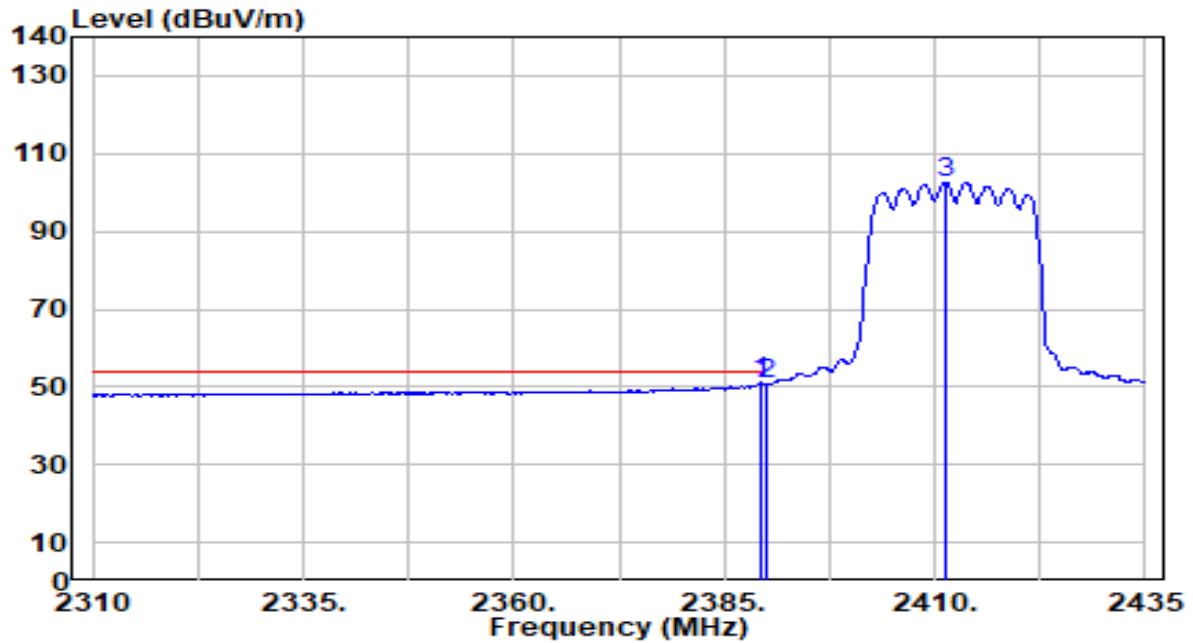


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.375	18.26	32.72	50.99	-3.01	54.00	203	240	Average
2		2390.000	17.73	32.73	50.46	-3.54	54.00	203	240	Average
3		2411.250	69.77	32.81	102.58	N/A	N/A	203	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

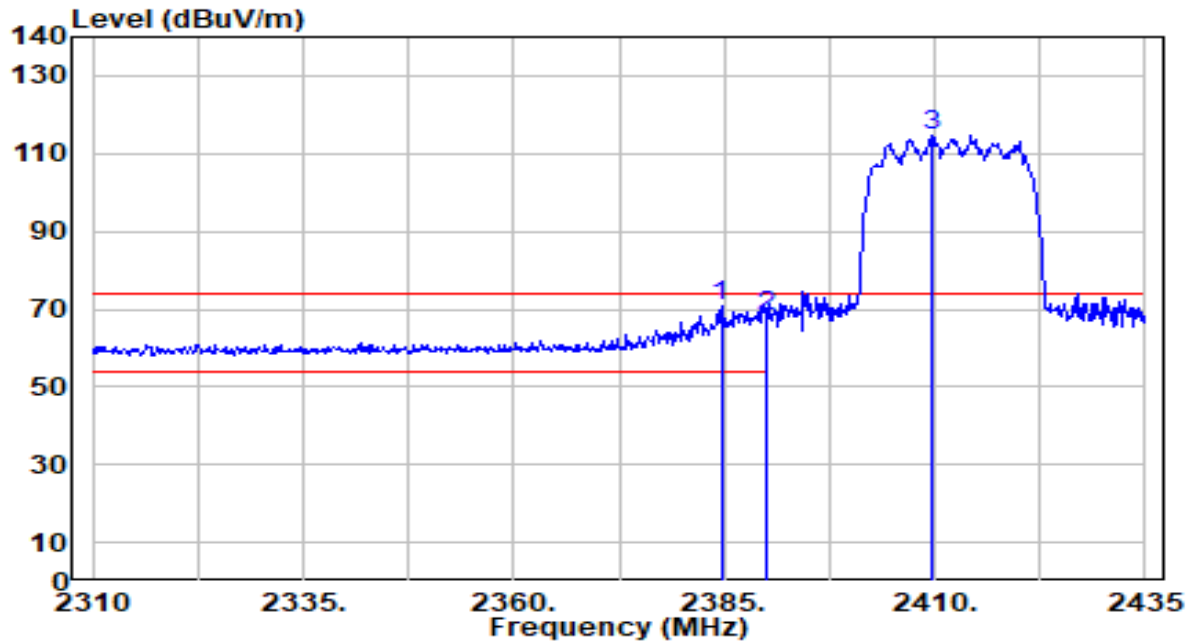


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.625	38.24	32.71	70.94	-3.06	74.00	100	207	Peak
2		2390.000	35.33	32.73	68.06	-5.94	74.00	100	207	Peak
3		2409.750	81.87	32.80	114.67	N/A	N/A	100	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

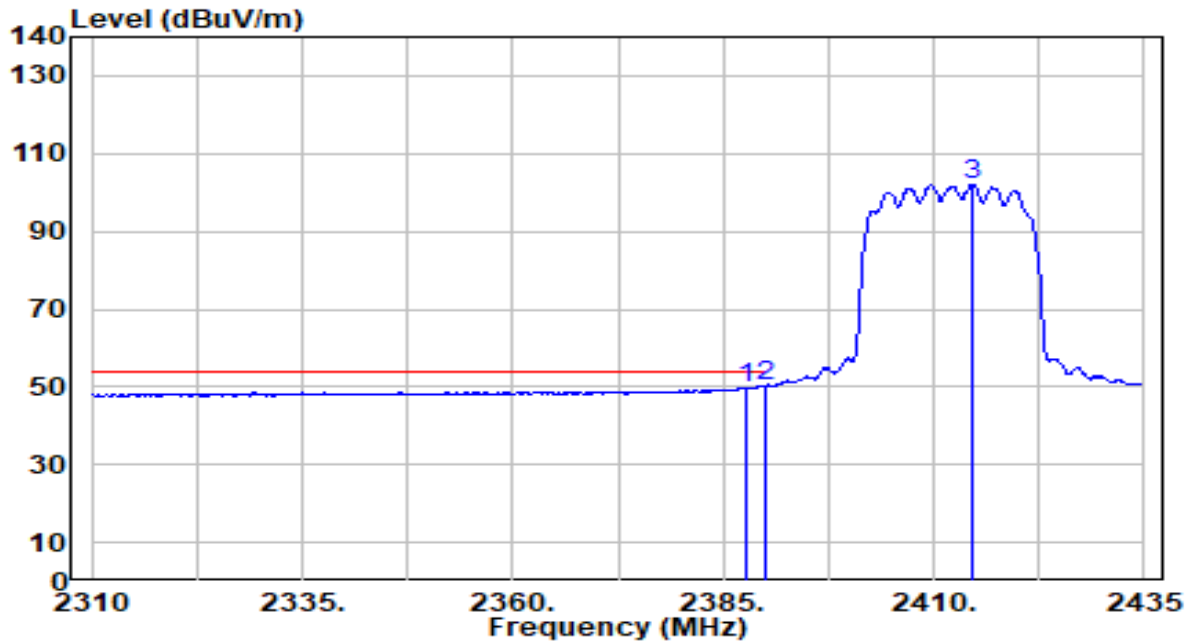


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.625	17.13	32.72	49.85	-4.15	54.00	100	207	Average
2	*	2390.000	17.67	32.73	50.40	-3.60	54.00	100	207	Average
3		2414.625	69.11	32.82	101.94	N/A	N/A	100	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

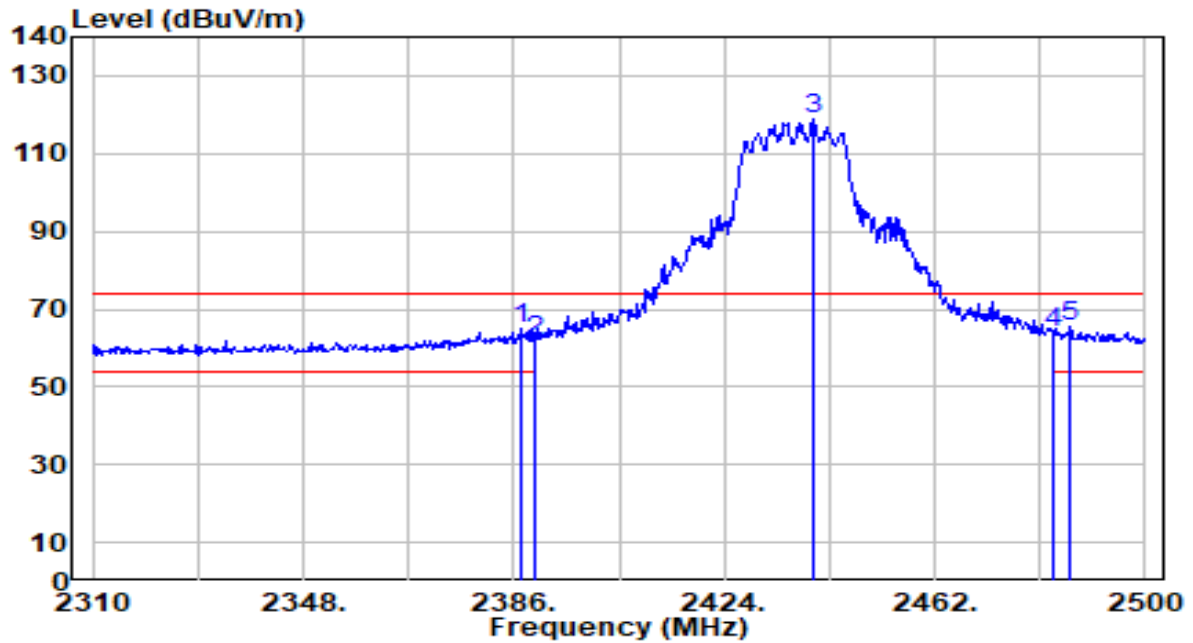


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	32.15	32.72	64.87	-9.13	74.00	203	240	Peak
2	2390.000	29.25	32.73	61.98	-12.02	74.00	203	240	Peak
3	2439.960	85.74	32.92	118.67	N/A	N/A	203	240	Peak
4	2483.500	30.81	33.09	63.91	-10.09	74.00	203	240	Peak
5	* 2486.510	32.15	33.11	65.26	-8.74	74.00	203	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

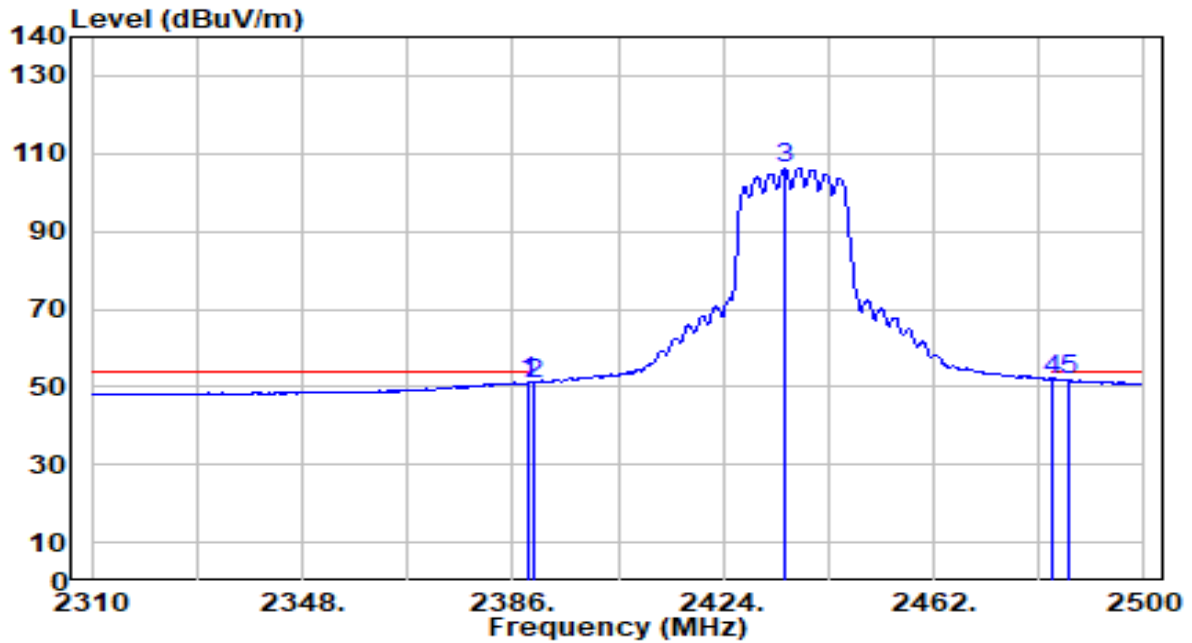


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	18.33	32.72	51.05	-2.95	54.00	203	240	Average
2	2390.000	18.20	32.73	50.93	-3.07	54.00	203	240	Average
3	2435.020	73.14	32.90	106.05	N/A	N/A	203	240	Average
4	* 2483.500	18.86	33.09	51.96	-2.04	54.00	203	240	Average
5	2486.510	18.81	33.11	51.91	-2.09	54.00	203	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

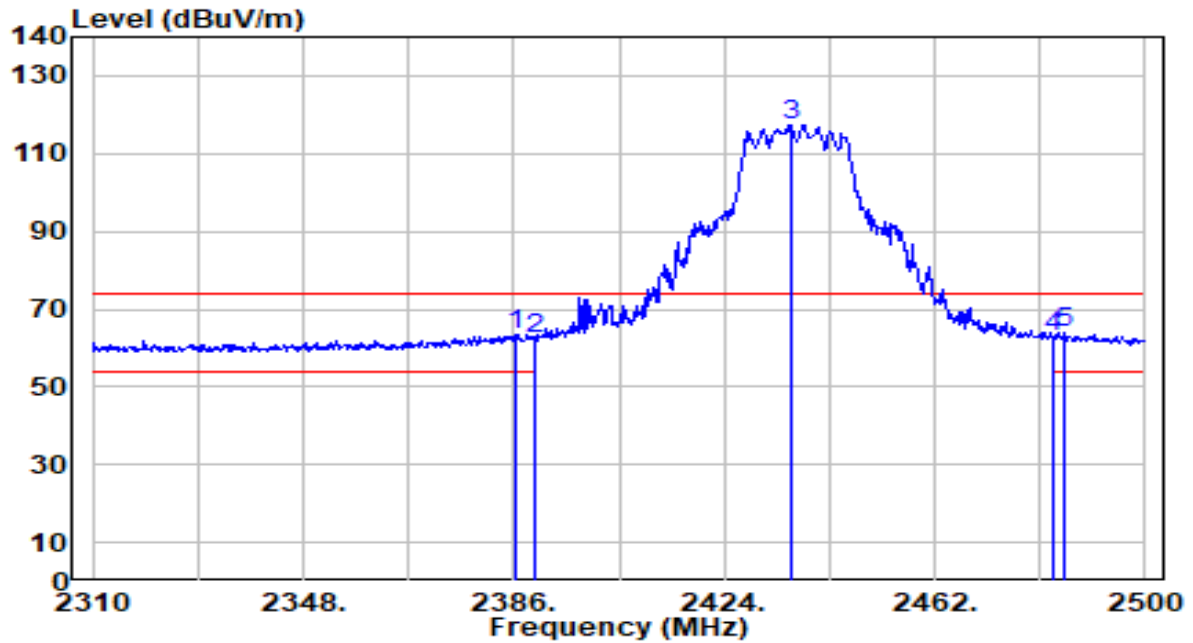


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.570	30.93	32.71	63.64	-10.36	74.00	100	207	Peak
2	2390.000	29.47	32.73	62.20	-11.80	74.00	100	207	Peak
3	2435.970	84.50	32.91	117.41	N/A	N/A	100	207	Peak
4	2483.500	29.89	33.09	62.98	-11.02	74.00	100	207	Peak
5	* 2485.180	30.69	33.10	63.79	-10.21	74.00	100	207	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

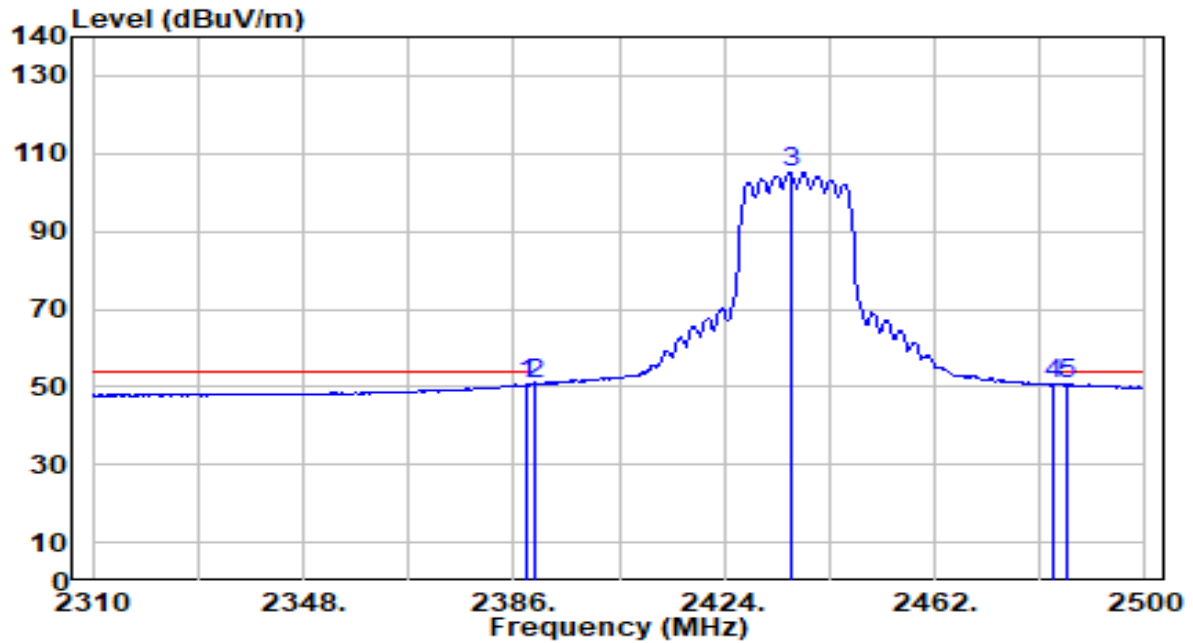


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.280	18.03	32.72	50.75	-3.25	54.00	100	207	Average
2	*	2390.000	18.23	32.73	50.96	-3.04	54.00	100	207	Average
3		2435.970	72.47	32.91	105.38	N/A	N/A	100	207	Average
4		2483.500	17.67	33.09	50.76	-3.24	54.00	100	207	Average
5		2485.940	17.50	33.10	50.61	-3.39	54.00	100	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

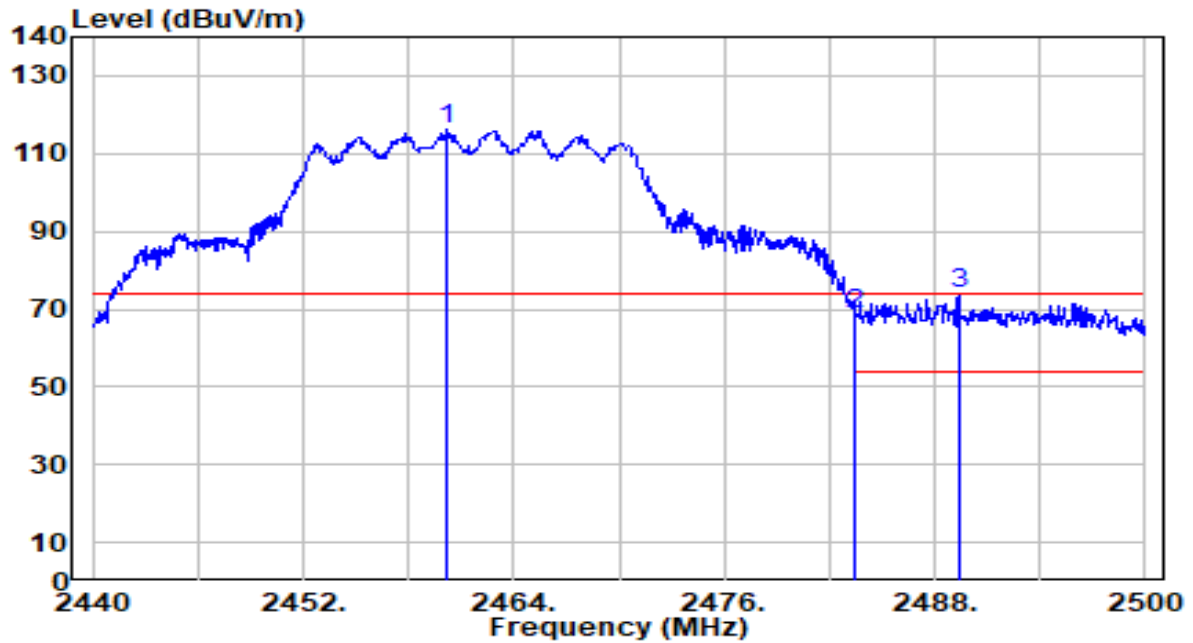


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.160	83.46	33.00	116.47	N/A	N/A	200	240	Peak
2	2483.500	35.75	33.09	68.85	-5.15	74.00	200	240	Peak
3	* 2489.380	40.77	33.12	73.88	-0.12	74.00	200	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

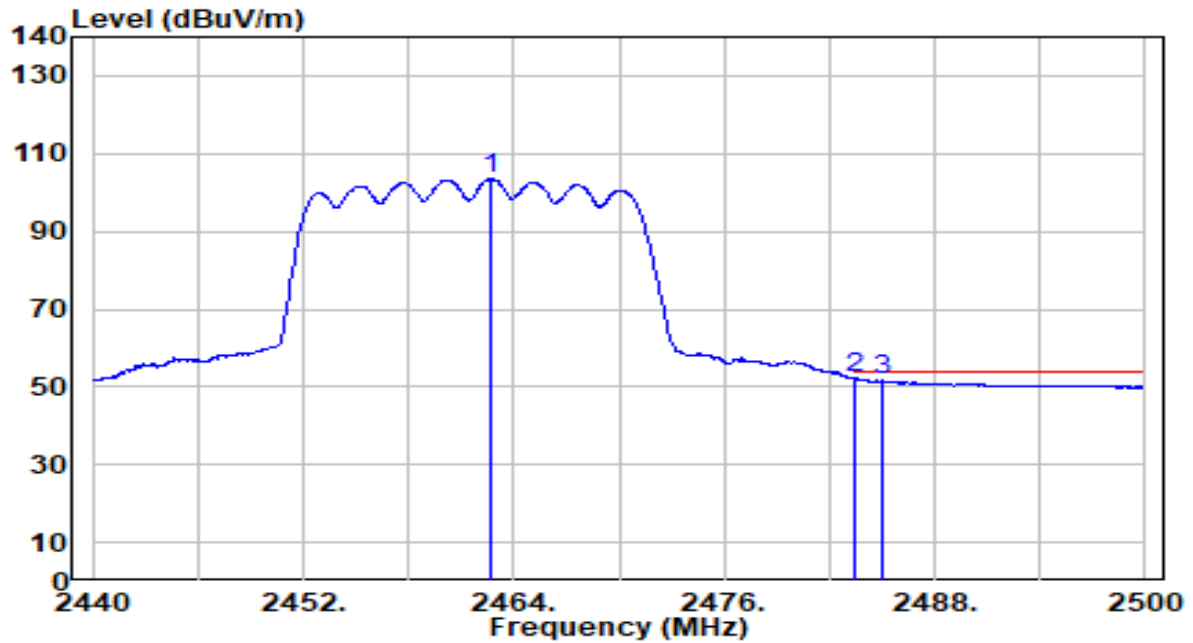


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.680	70.37	33.01	103.38	N/A	N/A	200	240	Average
2	*	2483.500	19.02	33.09	52.11	-1.89	54.00	200	240	Average
3		2484.940	18.44	33.10	51.54	-2.46	54.00	200	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

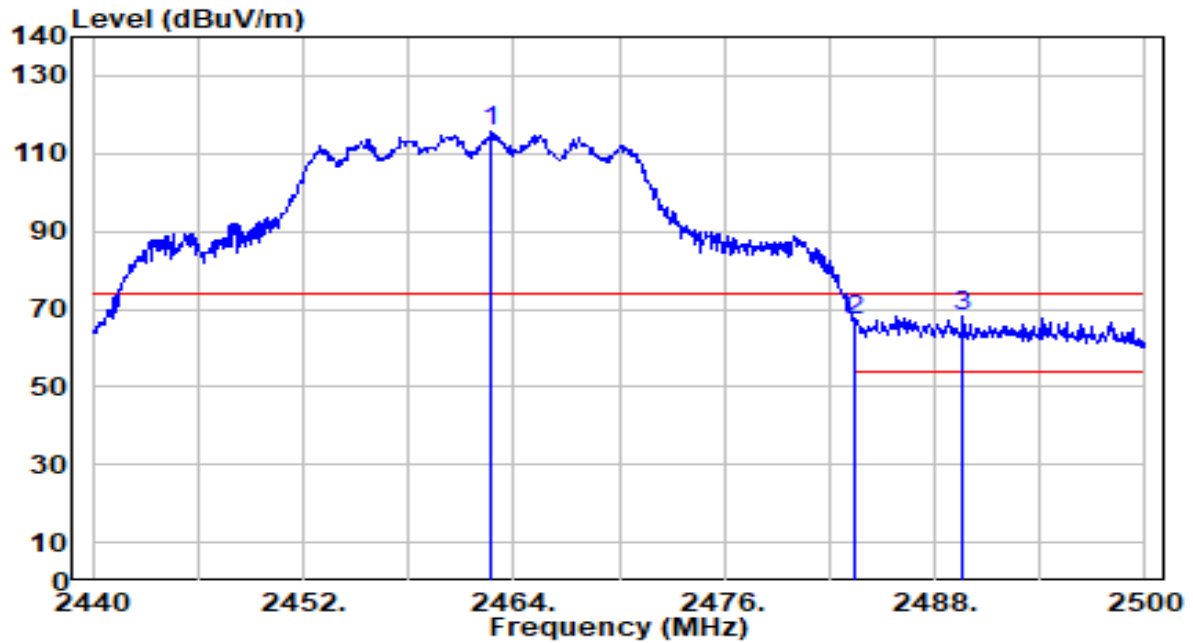


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.680	82.54	33.01	115.55	N/A	N/A	100	187	Peak
2	2483.500	33.76	33.09	66.85	-7.15	74.00	100	187	Peak
3	* 2489.620	34.89	33.12	68.01	-5.99	74.00	100	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

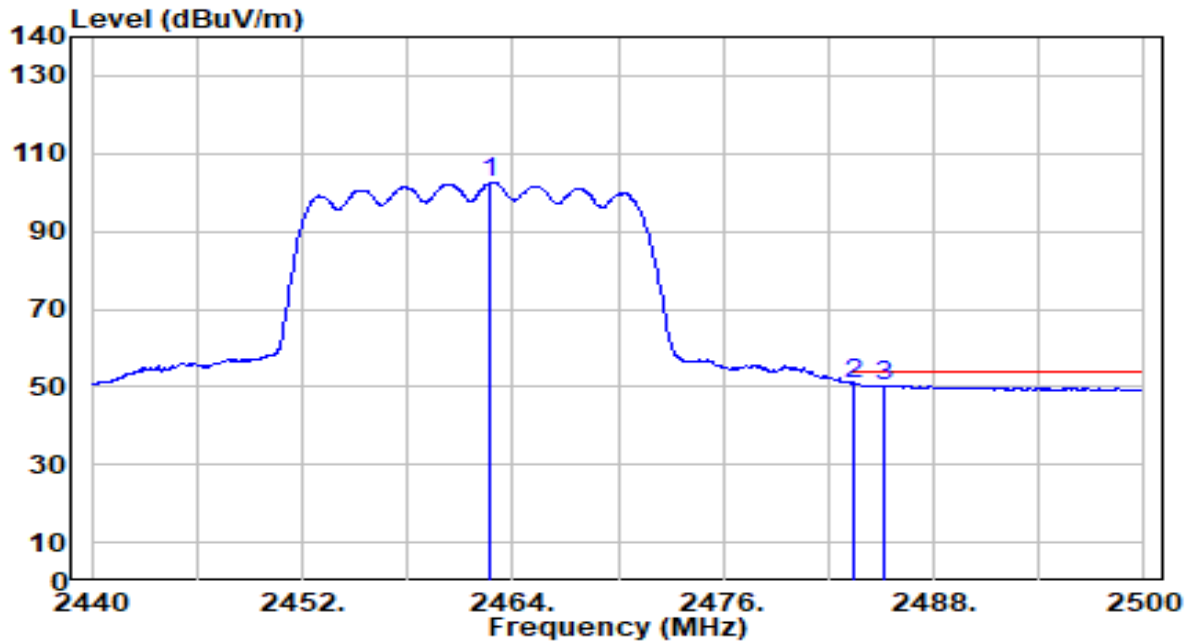


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.740	69.59	33.01	102.60	N/A	N/A	100	187	Average
2	*	2483.500	17.61	33.09	50.70	-3.30	54.00	100	187	Average
3		2485.120	17.31	33.10	50.41	-3.59	54.00	100	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

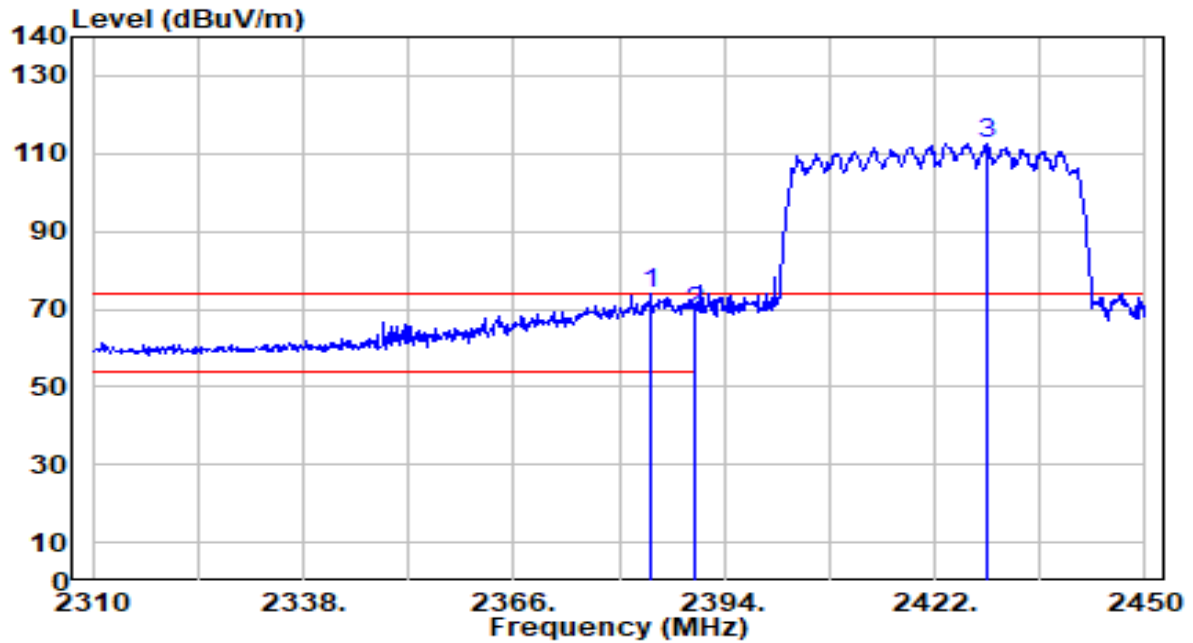


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.200	41.12	32.70	73.82	-0.18	74.00	202	242	Peak
2		2390.000	36.64	32.73	69.36	-4.64	74.00	202	242	Peak
3		2428.860	79.68	32.88	112.56	N/A	N/A	202	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

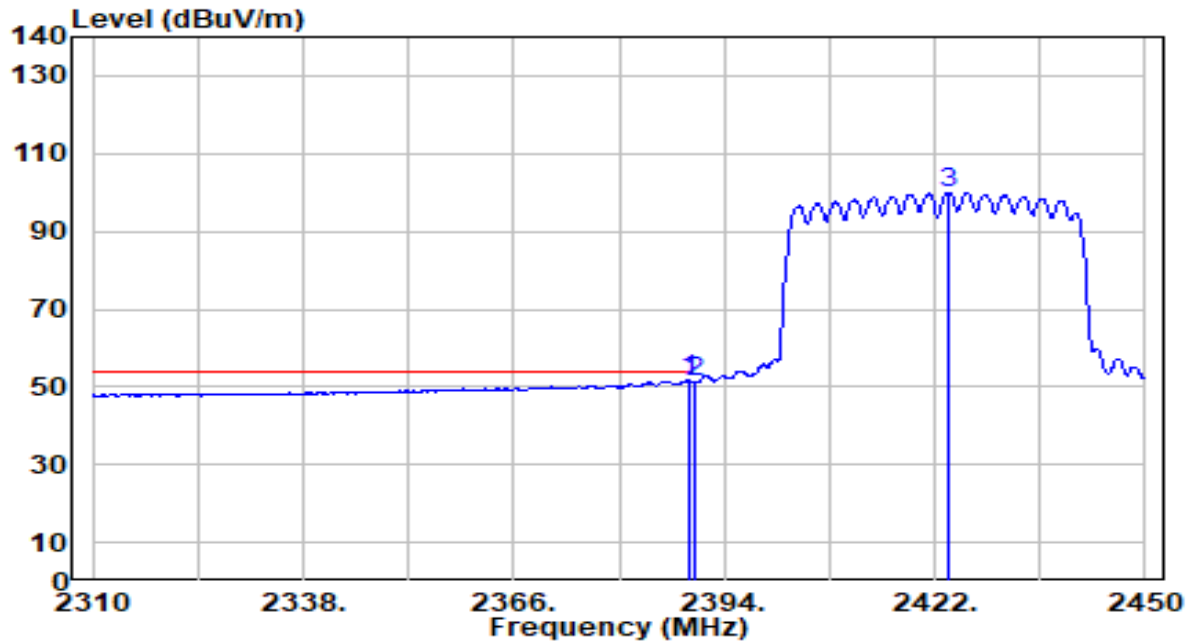


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.380	18.89	32.72	51.61	-2.39	54.00	202	242	Average
2		2390.000	18.46	32.73	51.18	-2.82	54.00	202	242	Average
3		2423.680	67.18	32.86	100.04	N/A	N/A	202	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

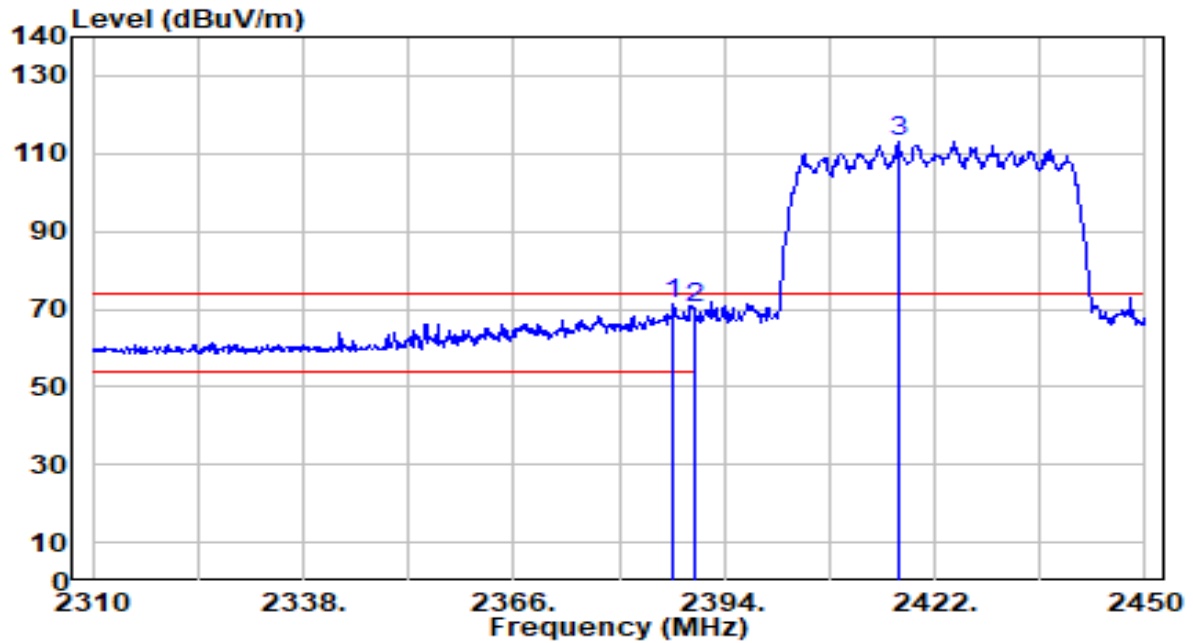


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	38.86	32.72	71.58	-2.42	74.00	100	207	Peak
2		2390.000	37.65	32.73	70.37	-3.63	74.00	100	207	Peak
3		2417.100	80.01	32.83	112.85	N/A	N/A	100	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

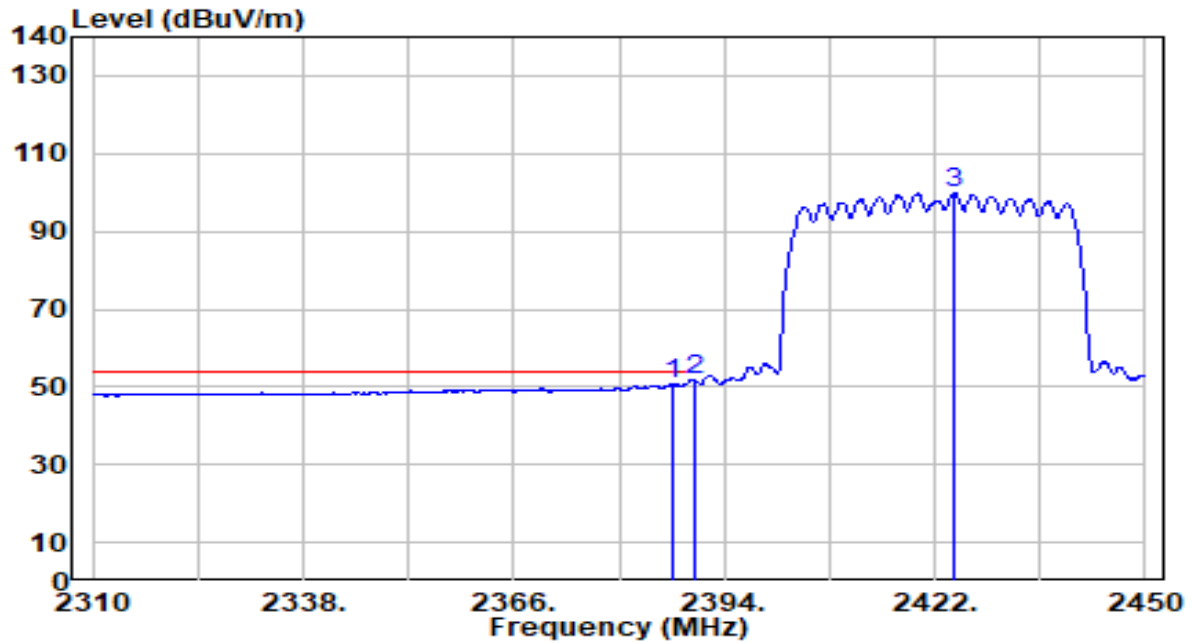


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.280	17.98	32.72	50.69	-3.31	54.00	100	207	Average
2	*	2390.000	18.96	32.73	51.68	-2.32	54.00	100	207	Average
3		2424.520	66.86	32.86	99.73	N/A	N/A	100	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

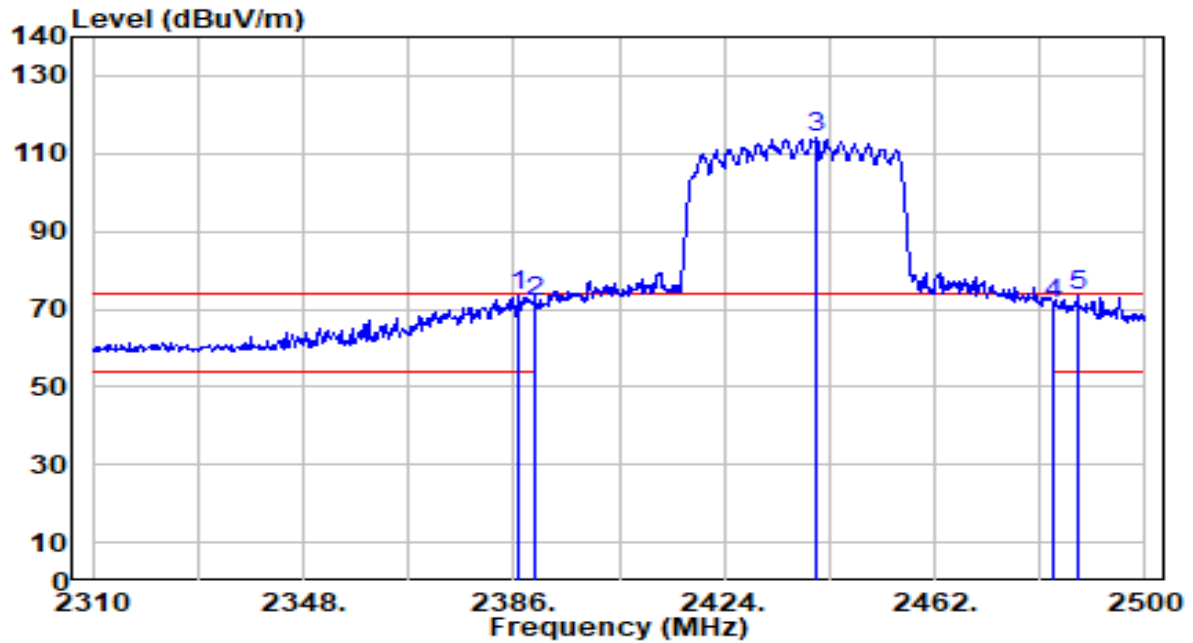


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	40.68	32.71	73.39	-0.61	74.00	203	240	Peak
2	2390.000	39.06	32.73	71.79	-2.21	74.00	203	240	Peak
3	2440.530	81.19	32.93	114.12	N/A	N/A	203	240	Peak
4	2483.500	38.12	33.09	71.22	-2.78	74.00	203	240	Peak
5	* 2487.840	40.34	33.11	73.46	-0.54	74.00	203	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

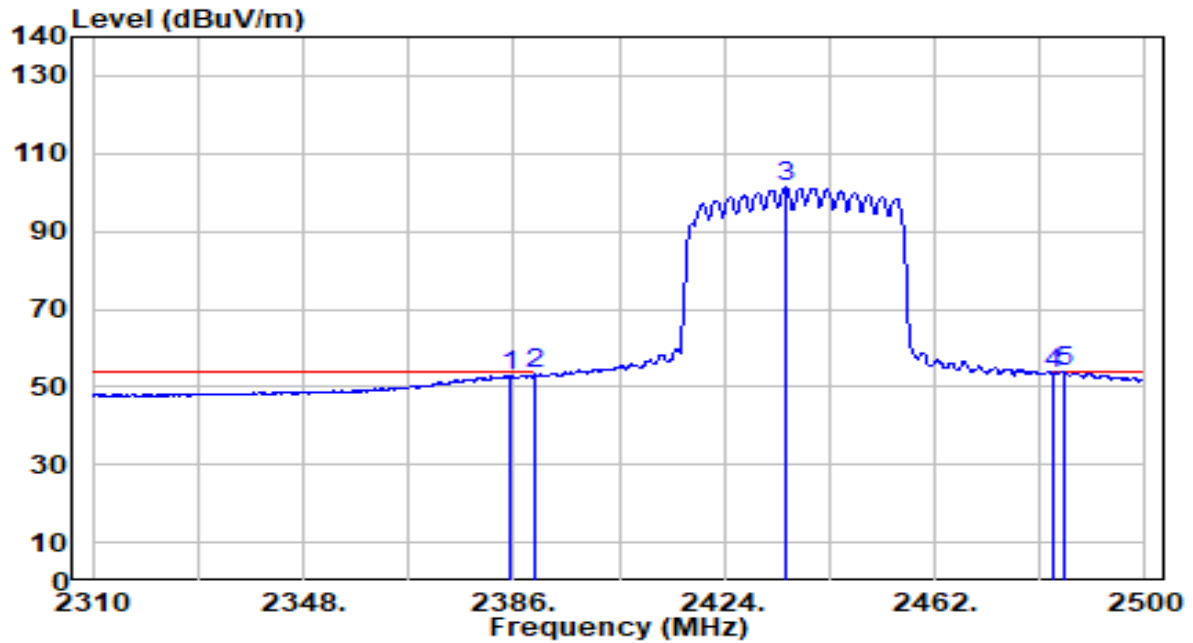


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	20.37	32.71	53.08	-0.92	54.00	203	240	Average
2	2390.000	20.39	32.73	53.11	-0.89	54.00	203	240	Average
3	2435.020	68.39	32.90	101.29	N/A	N/A	203	240	Average
4	2483.500	20.28	33.09	53.38	-0.62	54.00	203	240	Average
5	* 2485.180	20.74	33.10	53.84	-0.16	54.00	203	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

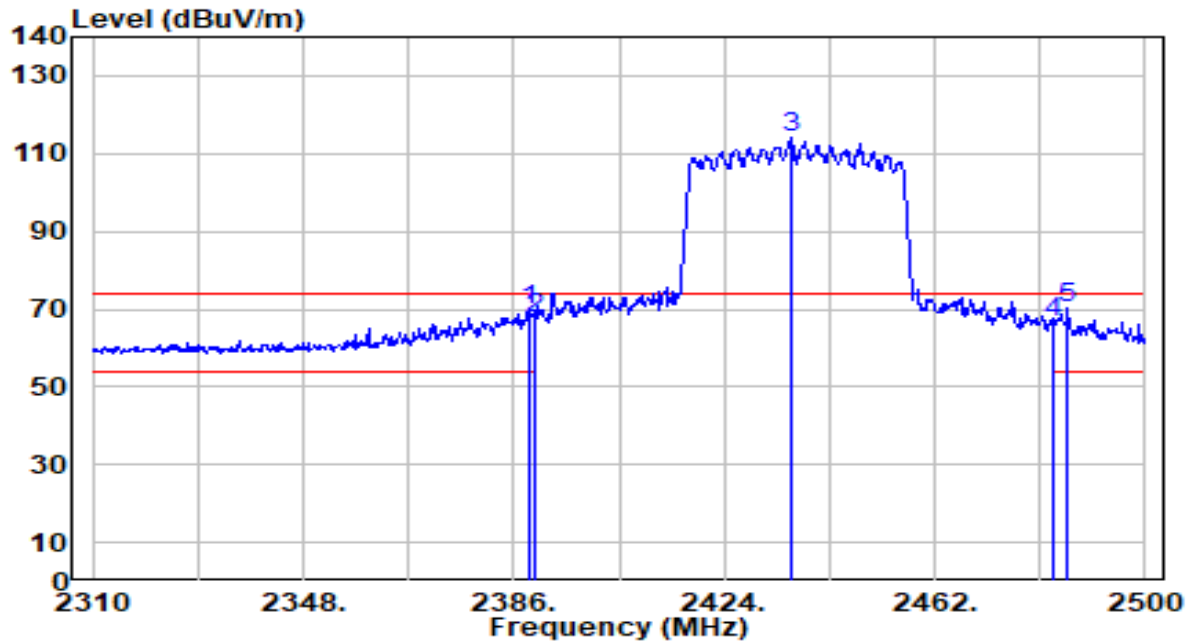


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	37.11	32.72	69.83	-4.17	74.00	100	207	Peak
2	2390.000	34.86	32.73	67.58	-6.42	74.00	100	207	Peak
3	2435.970	81.14	32.91	114.05	N/A	N/A	100	207	Peak
4	2483.500	33.44	33.09	66.54	-7.46	74.00	100	207	Peak
5	* 2486.130	36.91	33.11	70.02	-3.98	74.00	100	207	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

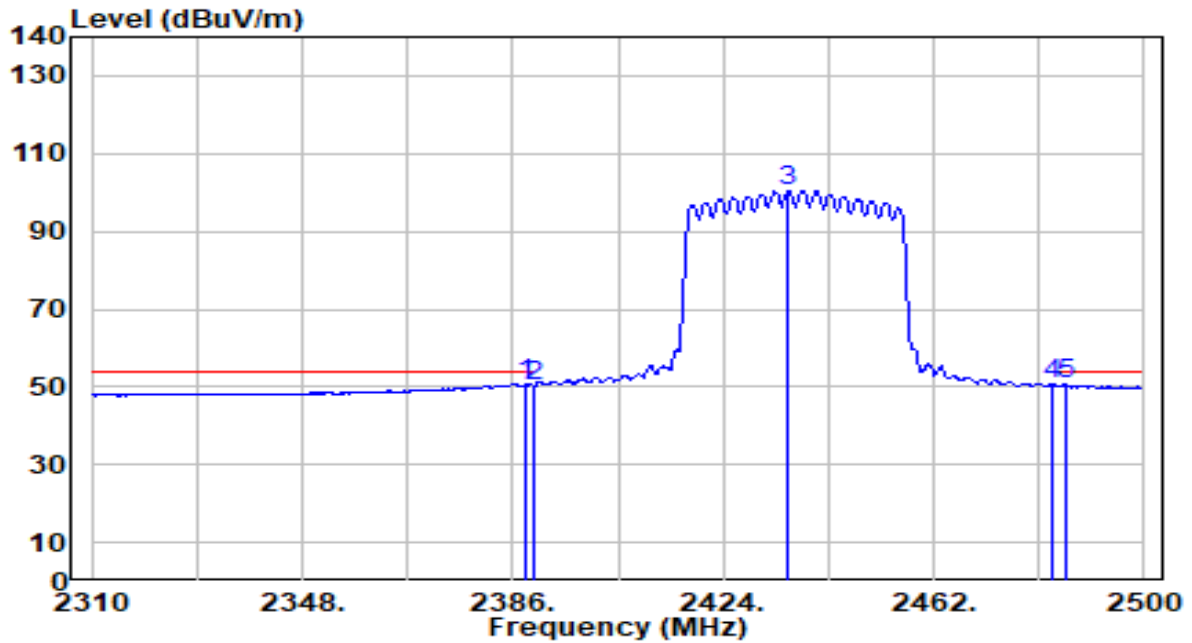


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.470	18.06	32.72	50.78	-3.22	54.00	100	207	Average
2		2390.000	17.70	32.73	50.43	-3.57	54.00	100	207	Average
3		2435.780	67.64	32.91	100.54	N/A	N/A	100	207	Average
4		2483.500	17.43	33.09	50.53	-3.47	54.00	100	207	Average
5		2485.750	17.43	33.10	50.53	-3.47	54.00	100	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

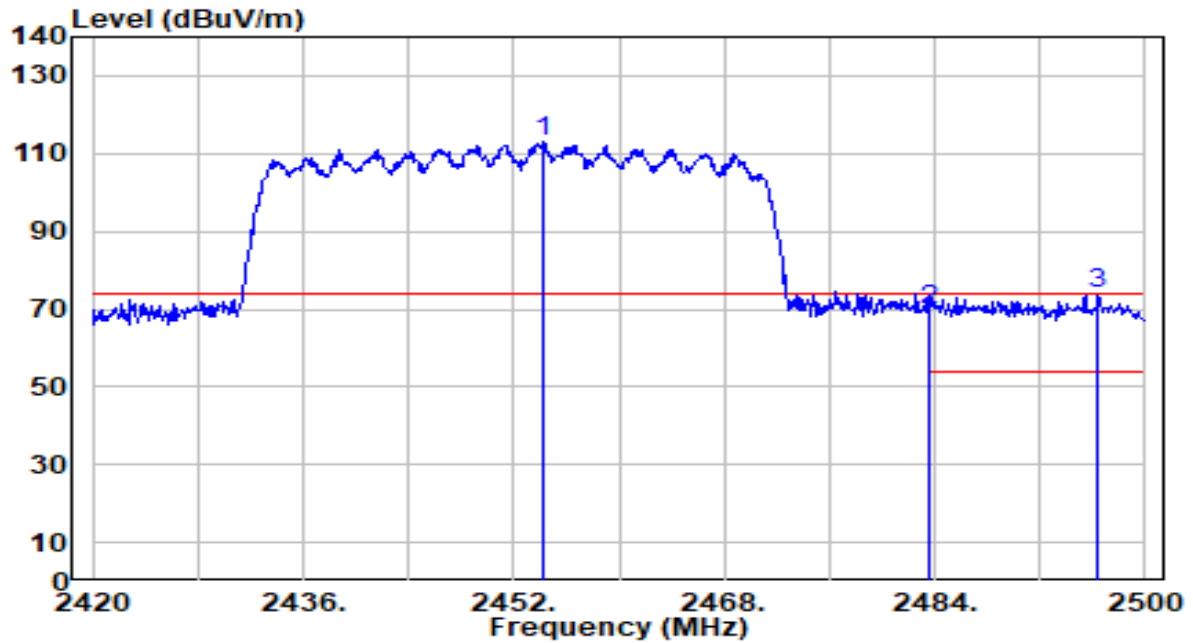


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.320	79.94	32.98	112.92	N/A	N/A	200	240	Peak
2	2483.500	36.86	33.09	69.95	-4.05	74.00	200	240	Peak
3	* 2496.400	40.68	33.15	73.82	-0.18	74.00	200	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

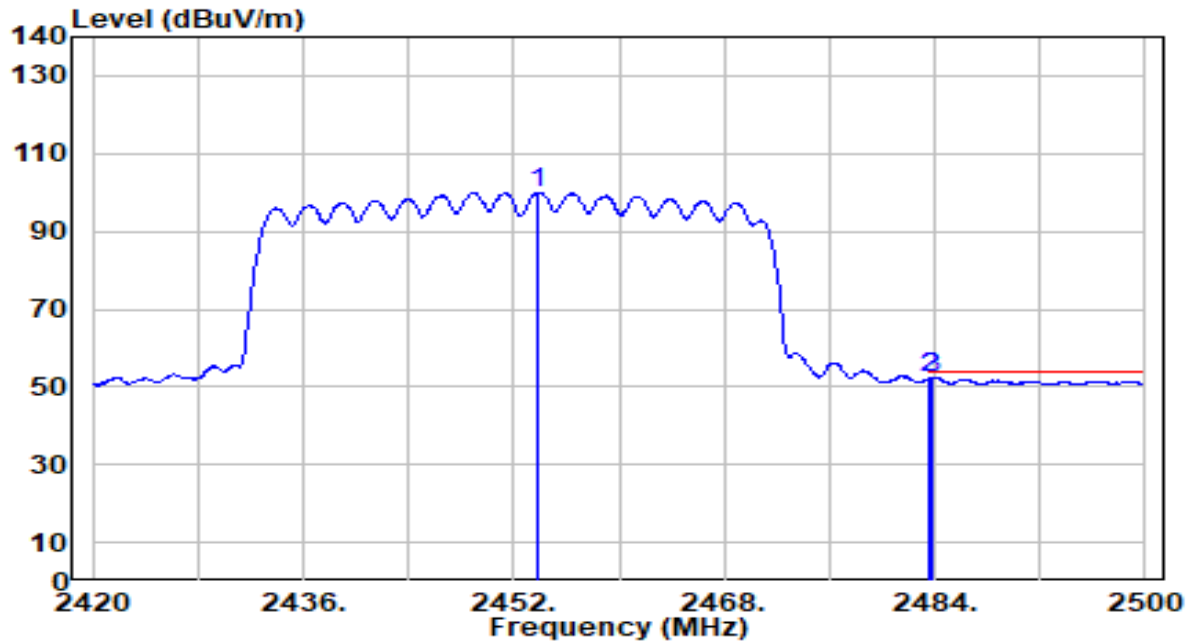


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.920	67.13	32.98	100.11	N/A	N/A	200	240	Average
2	2483.500	18.94	33.09	52.04	-1.96	54.00	200	240	Average
3	* 2483.840	19.37	33.10	52.47	-1.53	54.00	200	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

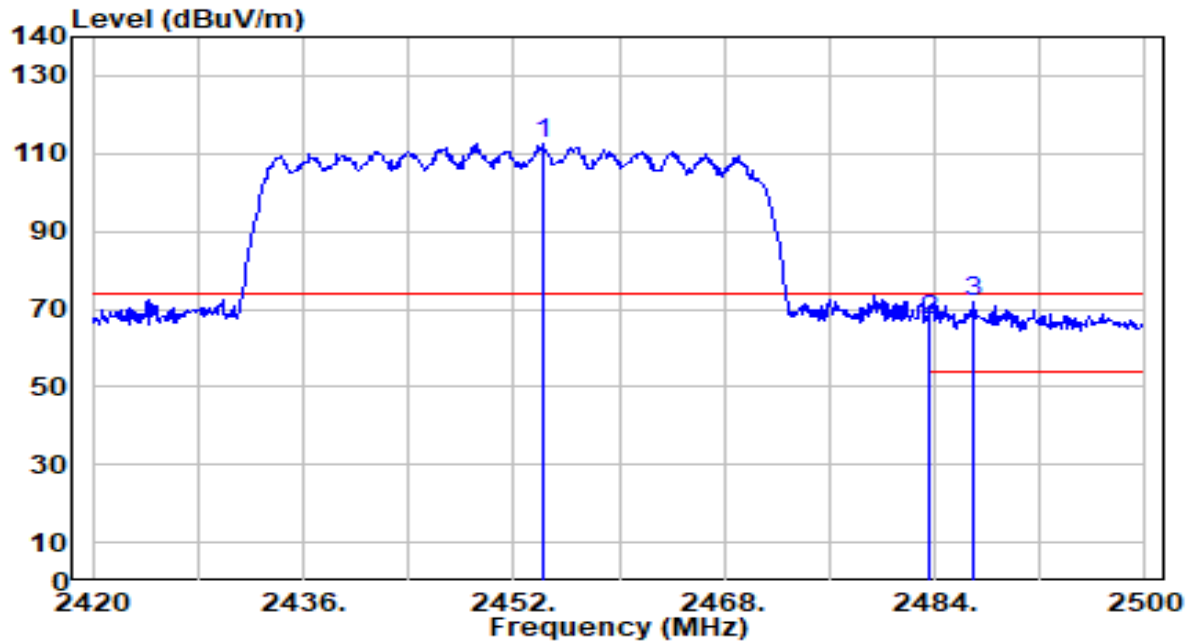


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.240	79.69	32.98	112.67	N/A	N/A	100	185	Peak
2	2483.500	34.16	33.09	67.26	-6.74	74.00	100	185	Peak
3	* 2486.960	38.57	33.11	71.67	-2.33	74.00	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-28
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

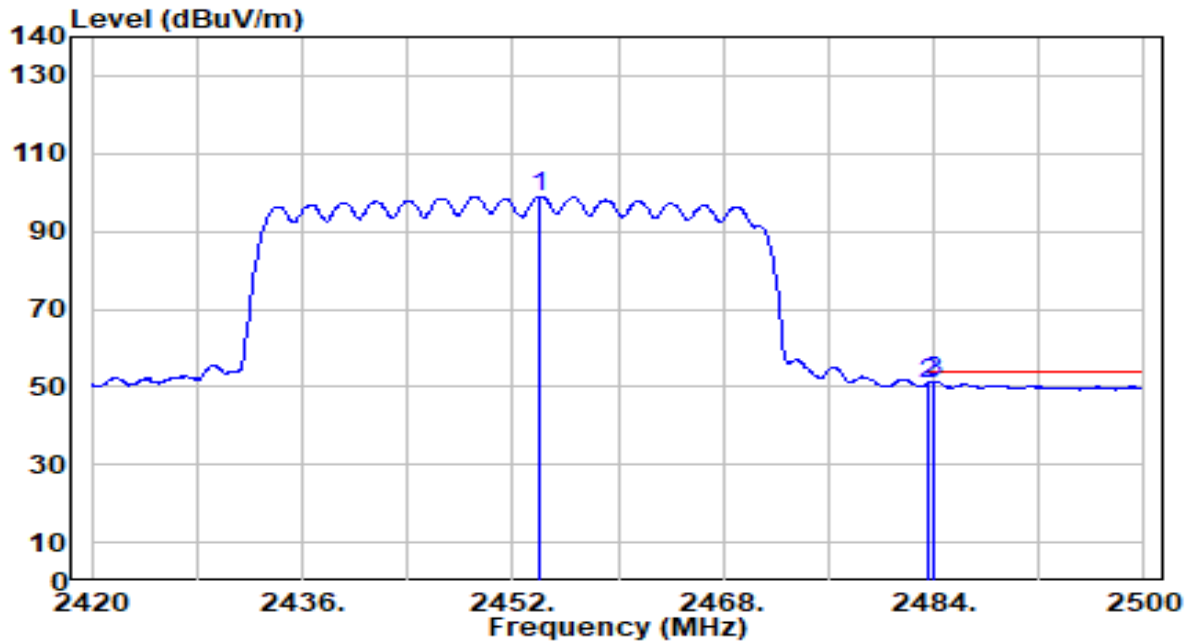

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.080	65.98	32.98	98.96	N/A	N/A	100	185	Average
2	2483.500	17.67	33.09	50.77	-3.23	54.00	100	185	Average
3	* 2484.080	18.30	33.10	51.40	-2.60	54.00	100	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

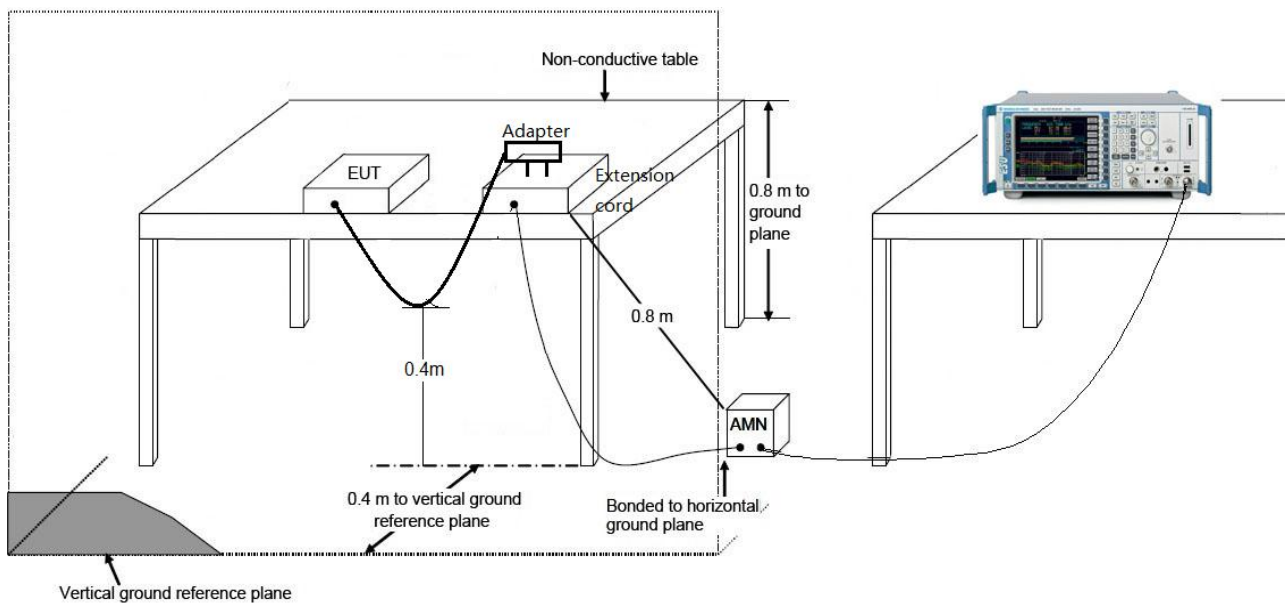

7.8.3. Test Result

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-30
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.1°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

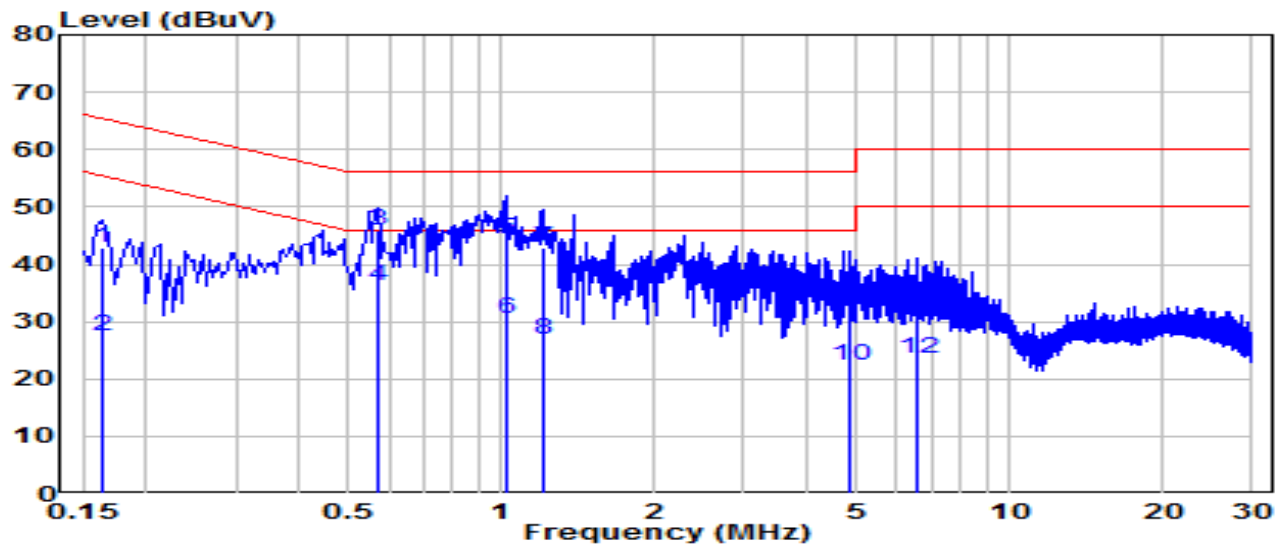


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	33.32	9.63	42.95	-22.34	65.28	QP
2	0.163	17.70	9.63	27.32	-27.96	55.28	Average
3	* 0.568	36.17	9.65	45.82	-10.18	56.00	QP
4	* 0.568	26.49	9.65	36.14	-9.86	46.00	Average
5	1.023	34.72	9.67	44.39	-11.61	56.00	QP
6	1.023	20.68	9.67	30.35	-15.65	46.00	Average
7	1.207	33.22	9.68	42.90	-13.10	56.00	QP
8	1.207	17.19	9.68	26.87	-19.13	46.00	Average
9	4.848	22.42	9.74	32.16	-23.84	56.00	QP
10	4.848	12.64	9.74	22.38	-23.62	46.00	Average
11	6.544	22.54	9.78	32.33	-27.67	60.00	QP
12	6.544	13.67	9.78	23.46	-26.54	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX1800 Ceiling Mount WiFi 6 Access Point	Date of Test	2025-04-30
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.1°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

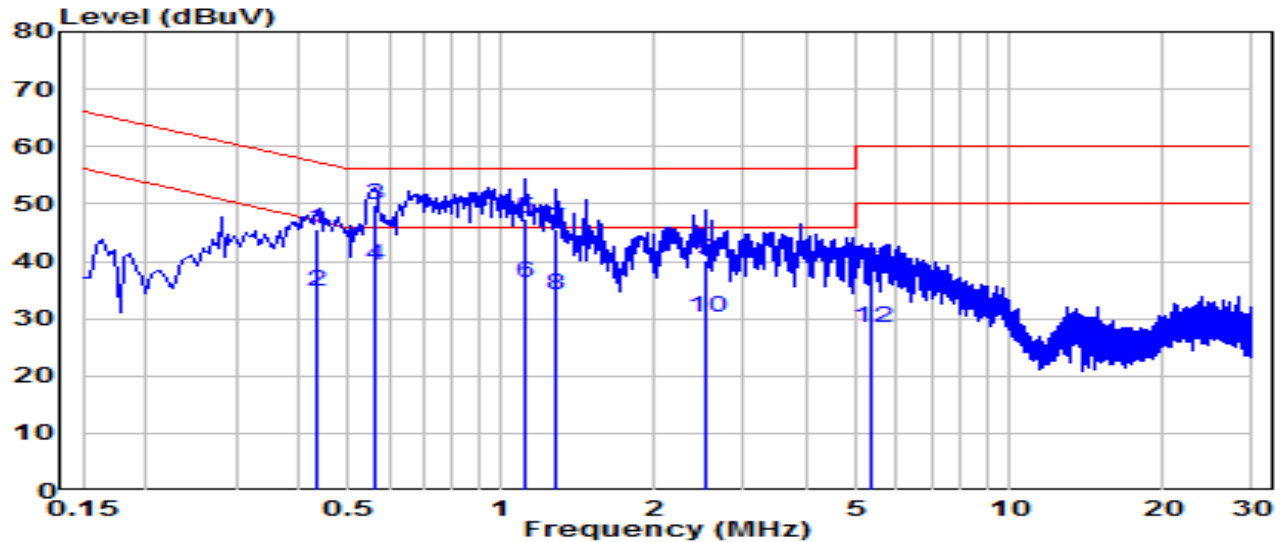

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.433	36.02	9.64	45.66	-11.53	57.19	QP
2	0.433	25.08	9.64	34.71	-12.47	47.19	Average
3	* 0.564	40.17	9.65	49.82	-6.18	56.00	QP
4	* 0.564	29.67	9.65	39.31	-6.69	46.00	Average
5	1.117	37.76	9.67	47.44	-8.56	56.00	QP
6	1.117	26.45	9.67	36.13	-9.87	46.00	Average
7	1.284	35.77	9.68	45.45	-10.55	56.00	QP
8	1.284	24.39	9.68	34.06	-11.94	46.00	Average
9	2.526	30.54	9.71	40.25	-15.75	56.00	QP
10	2.526	20.40	9.71	30.10	-15.90	46.00	Average
11	5.360	28.81	9.76	38.56	-21.44	60.00	QP
12	5.360	18.53	9.76	28.28	-21.72	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2504TW0123-UT” file.

Appendix B : External Photograph

Refer to “2504TW0123-UE” file.

Appendix C : Internal Photograph

Refer to “2504TW0123-UI” file.

_____ The End _____