



802.11ax-HE160 Power Spectral Density - Ant 1

Channel 50 (5250MHz)

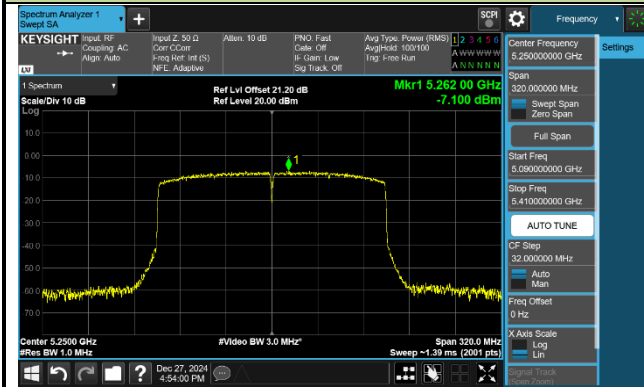

Channel 114 (5570MHz)

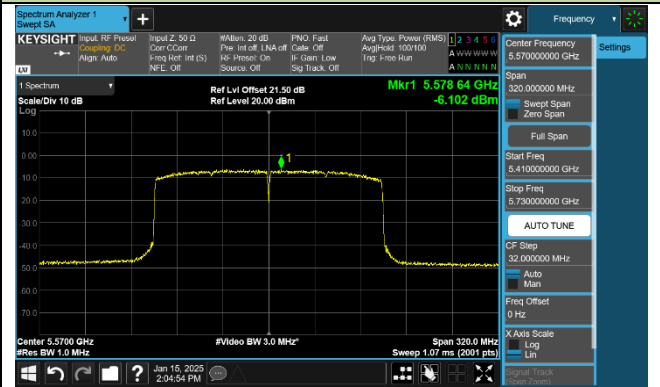

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

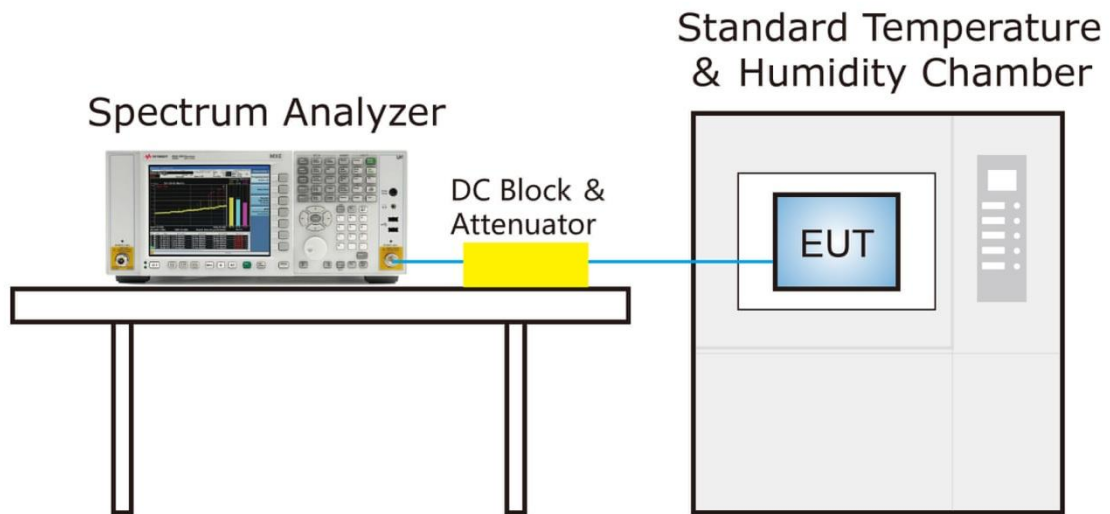

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

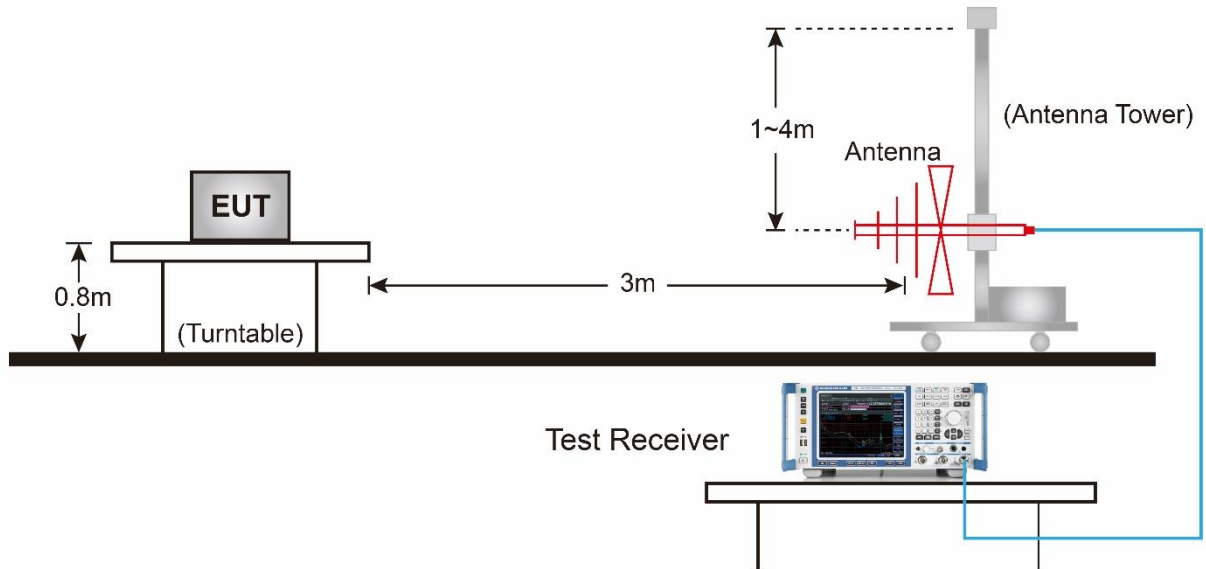


Above 1GHz Test Setup:

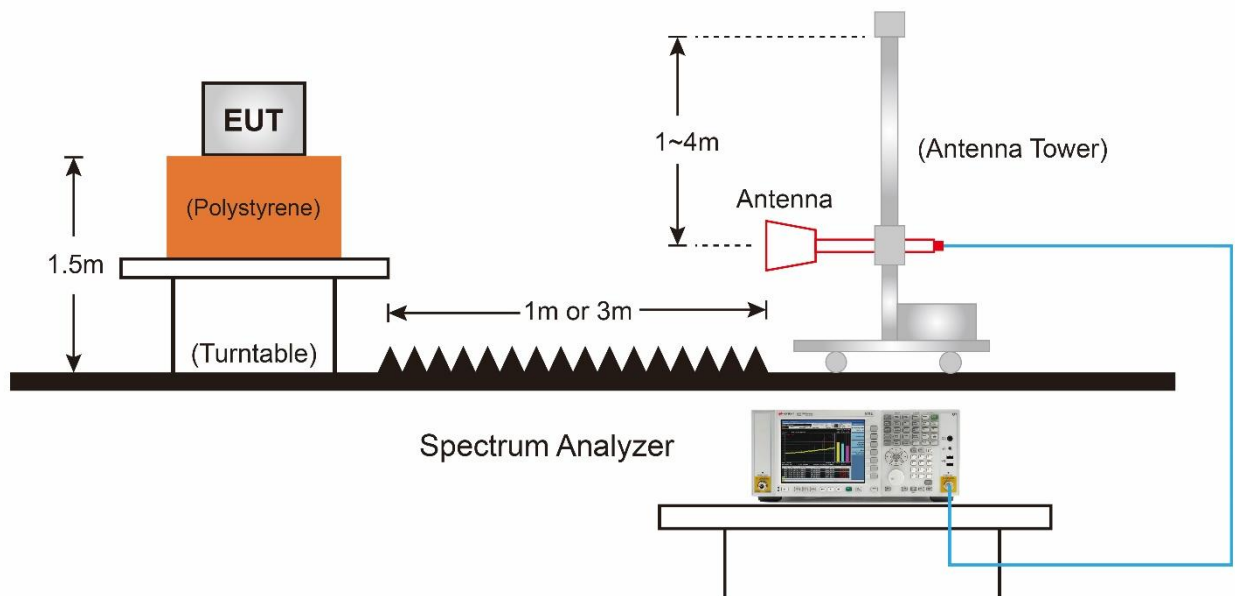

7.8.5.Test Result

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-23
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

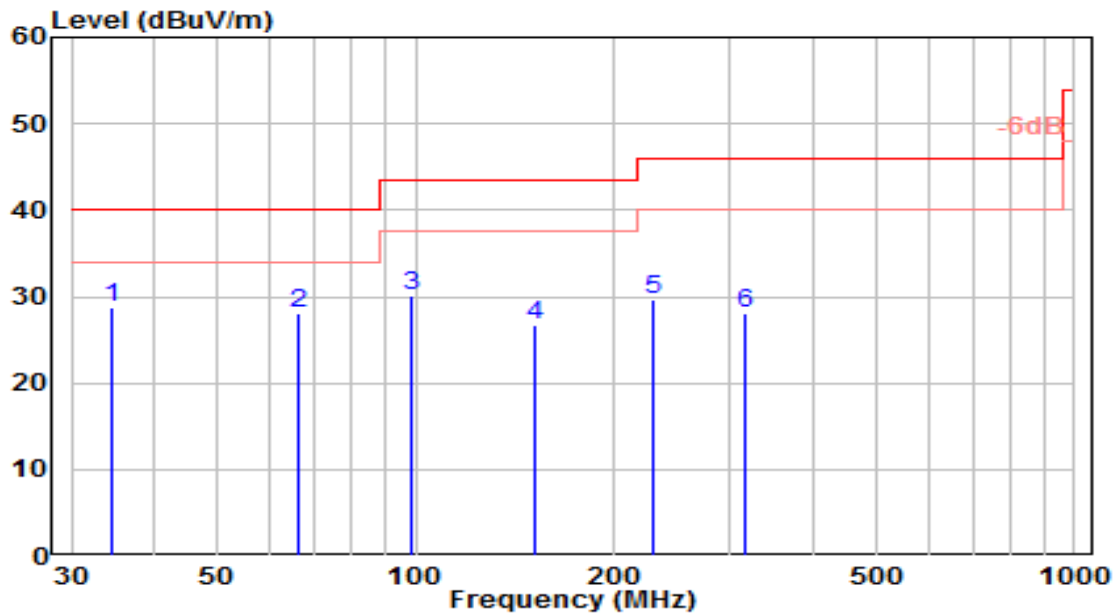


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	34.624	10.45	18.21	28.65	-11.35	40.00	150	260	QP
2		66.255	10.52	17.62	28.14	-11.86	40.00	150	80	QP
3		98.754	11.35	18.67	30.02	-13.48	43.50	150	315	QP
4		151.684	10.95	15.66	26.61	-16.89	43.50	150	80	QP
5		228.260	10.16	19.45	29.61	-16.39	46.00	100	325	QP
6		316.697	6.27	21.76	28.03	-17.97	46.00	100	320	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-23
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

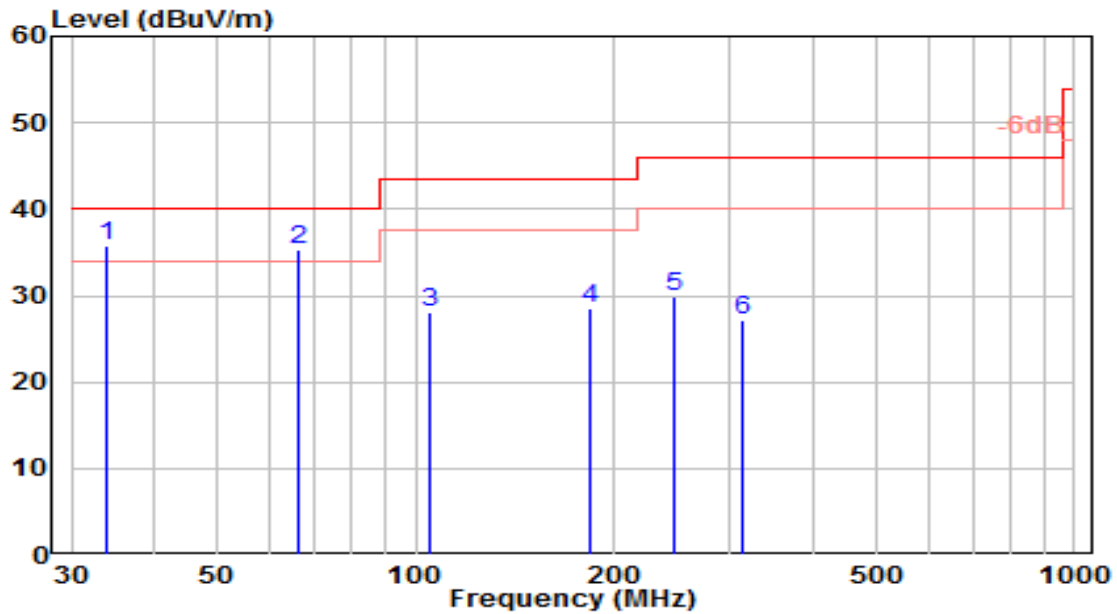


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	34.050	17.57	18.11	35.68	-4.32	40.00	100	5	QP
2		66.193	17.57	17.64	35.22	-4.78	40.00	100	95	QP
3		104.700	9.18	18.82	28.00	-15.50	43.50	100	125	QP
4		184.025	11.28	17.33	28.61	-14.89	43.50	100	60	QP
5		247.457	9.62	20.29	29.91	-16.09	46.00	100	270	QP
6		314.675	5.51	21.69	27.20	-18.80	46.00	150	105	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-23
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

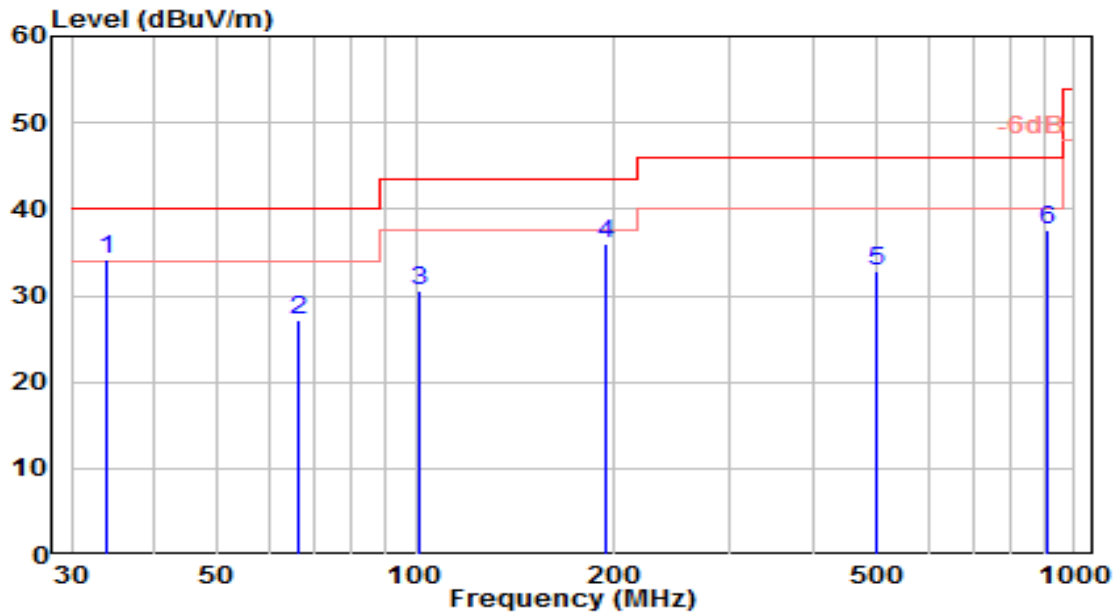


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	33.843	16.07	18.08	34.15	-5.85	40.00	100	200	QP
2		66.340	9.64	17.59	27.23	-12.77	40.00	100	65	QP
3		100.921	11.79	18.88	30.66	-12.84	43.50	150	255	QP
4		194.332	17.75	18.31	36.06	-7.44	43.50	100	305	QP
5		499.669	7.40	25.48	32.88	-13.12	46.00	100	300	QP
6		908.487	5.98	31.67	37.65	-8.35	46.00	150	300	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-23
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

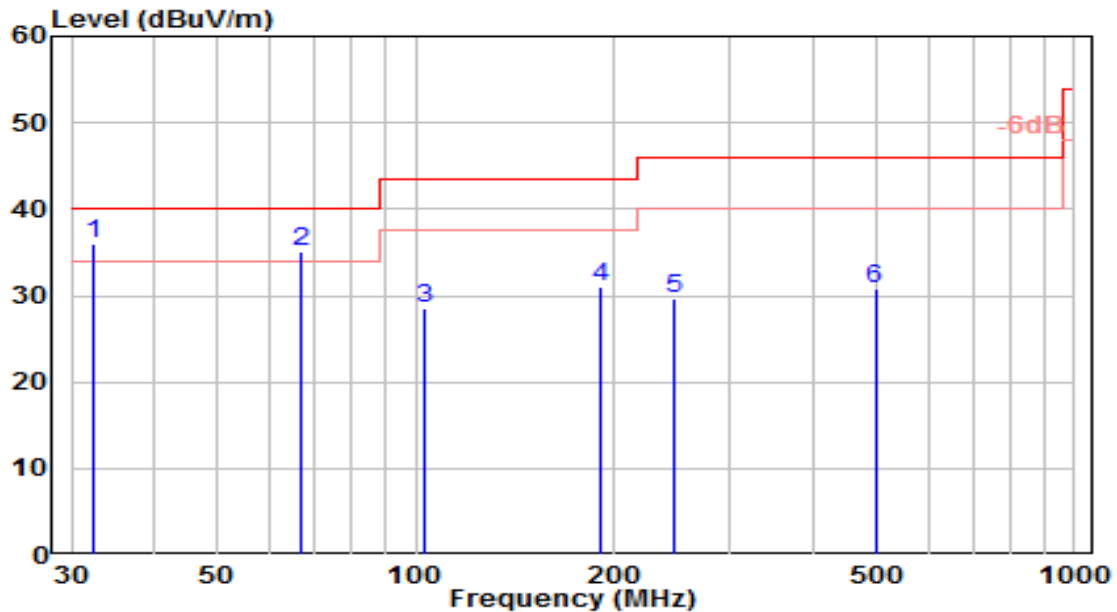


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	32.400	18.20	17.84	36.04	-3.96	40.00	100	210	QP
2		67.222	17.83	17.27	35.09	-4.91	40.00	100	60	QP
3		102.756	9.65	18.85	28.50	-15.00	43.50	100	175	QP
4		191.152	12.89	18.18	31.06	-12.44	43.50	100	160	QP
5		247.492	9.43	20.30	29.72	-16.28	46.00	100	265	QP
6		498.142	5.44	25.45	30.89	-15.11	46.00	100	130	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

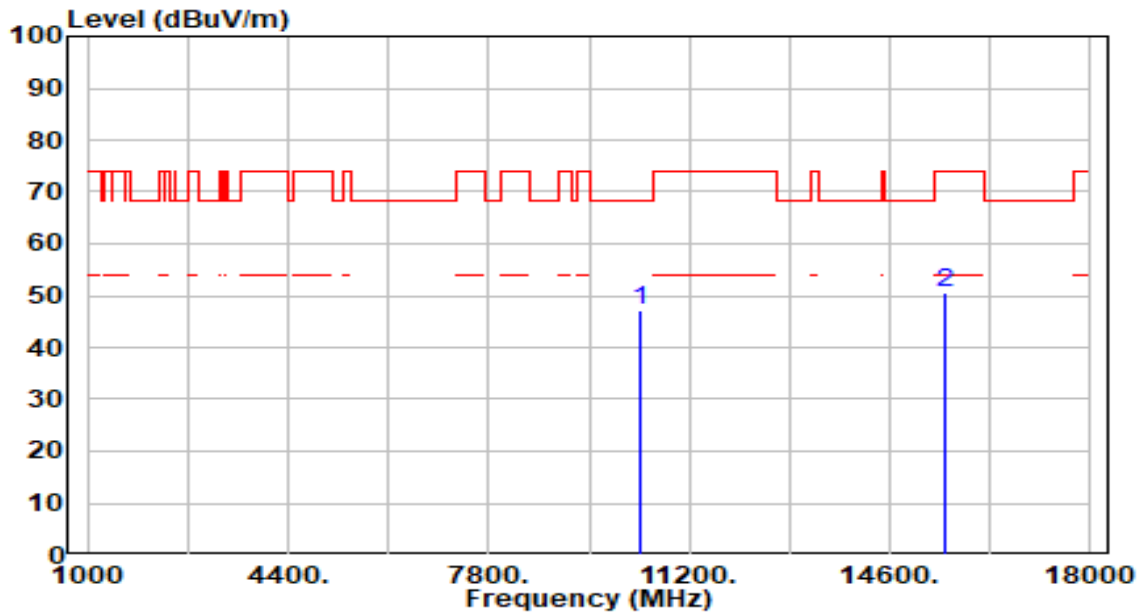


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.21	4.81	47.03	-21.17	68.20	300	34	Peak
2		15540.000	44.24	6.28	50.52	-23.48	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

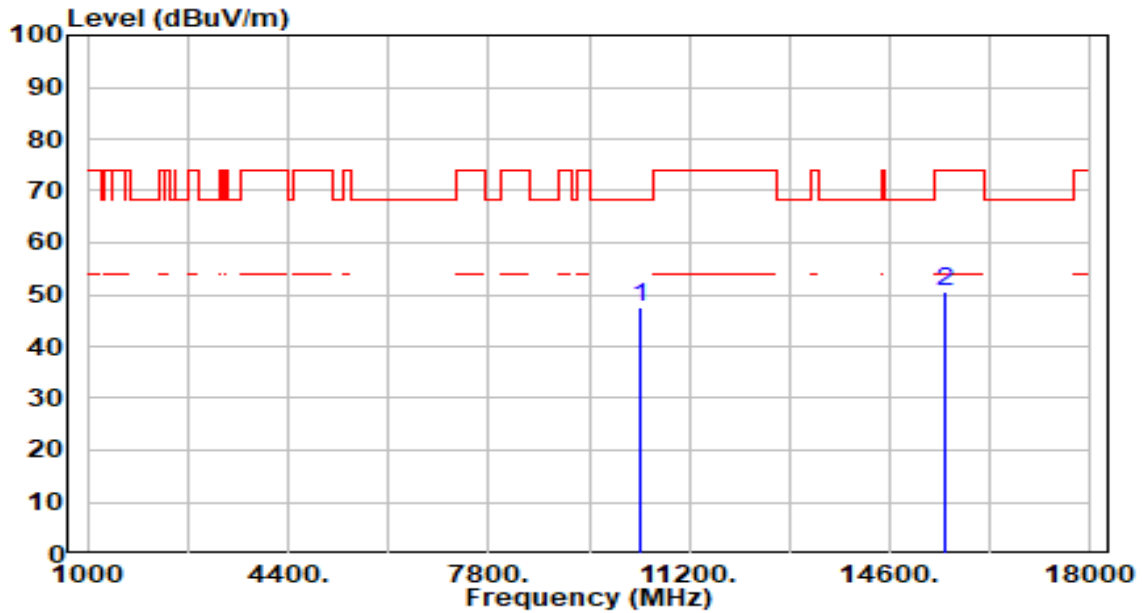


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.63	4.81	47.44	-20.76	68.20	200	313	Peak
2		15540.000	44.36	6.28	50.65	-23.35	74.00	258	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

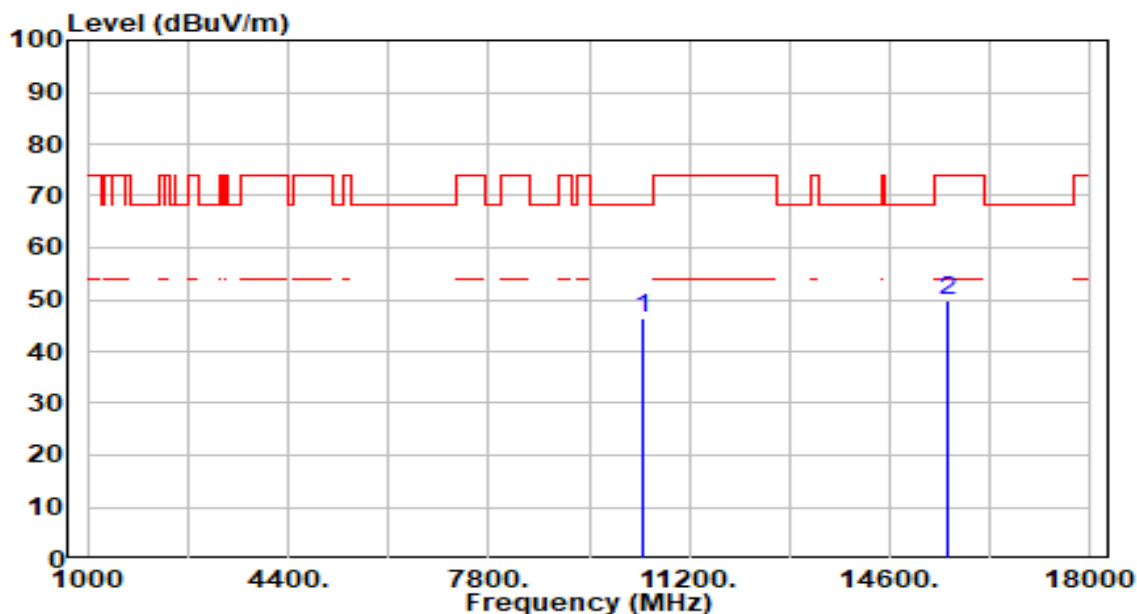


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.72	4.77	46.49	-21.71	68.20	200	286	Peak
2		15600.000	43.68	6.19	49.88	-24.12	74.00	200	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

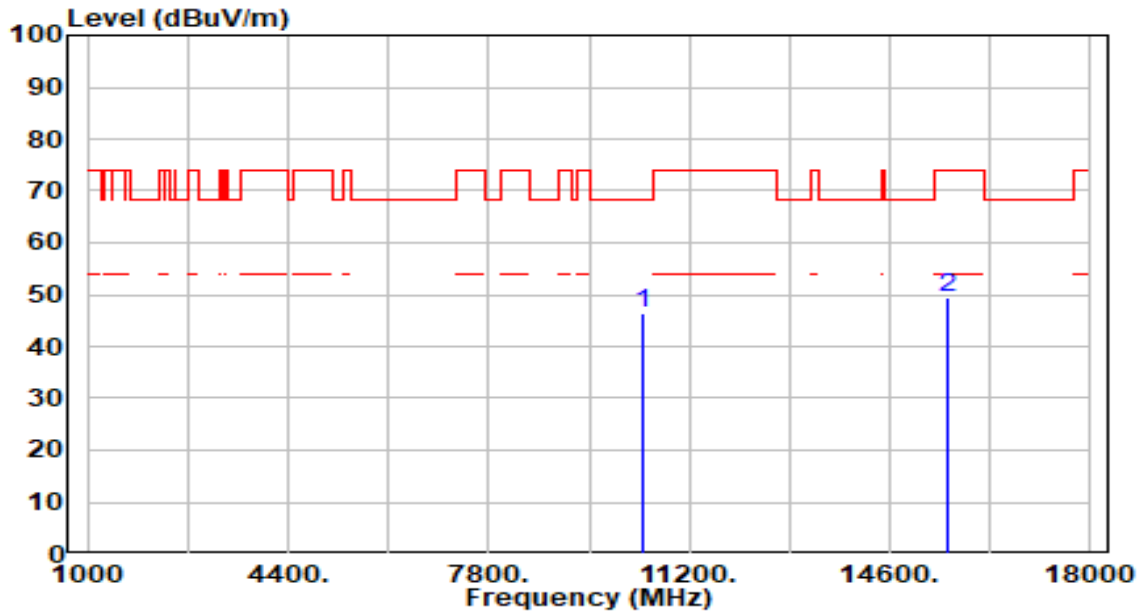


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.54	4.77	46.31	-21.89	68.20	200	352	Peak
2		15600.000	43.19	6.19	49.38	-24.62	74.00	200	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

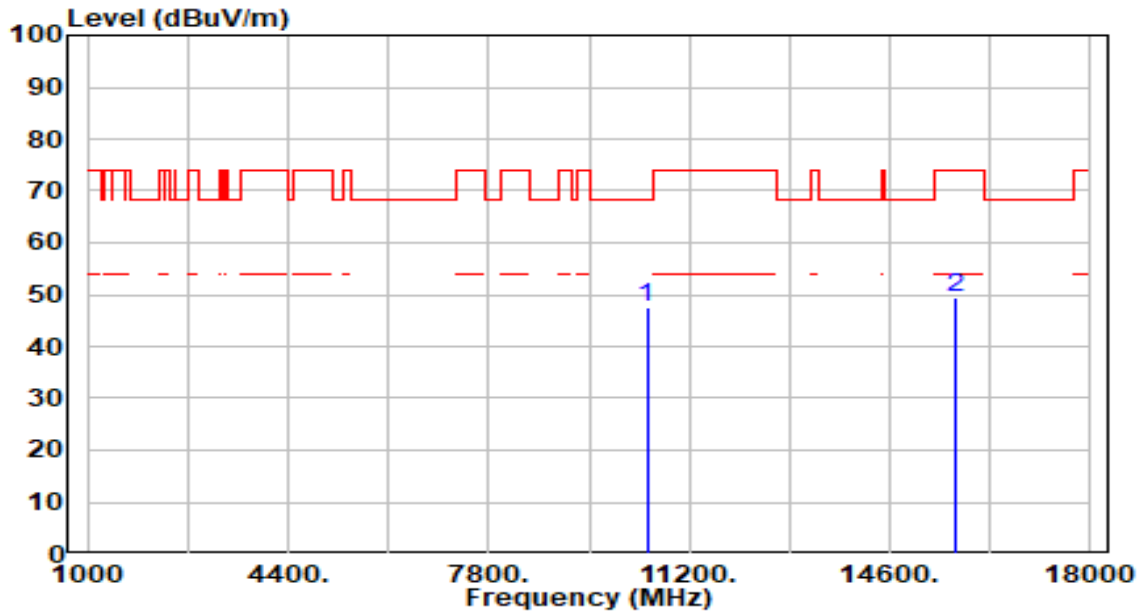


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	42.82	4.65	47.47	-20.73	68.20	200	47	Peak
2		15720.000	43.02	6.43	49.45	-24.55	74.00	200	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

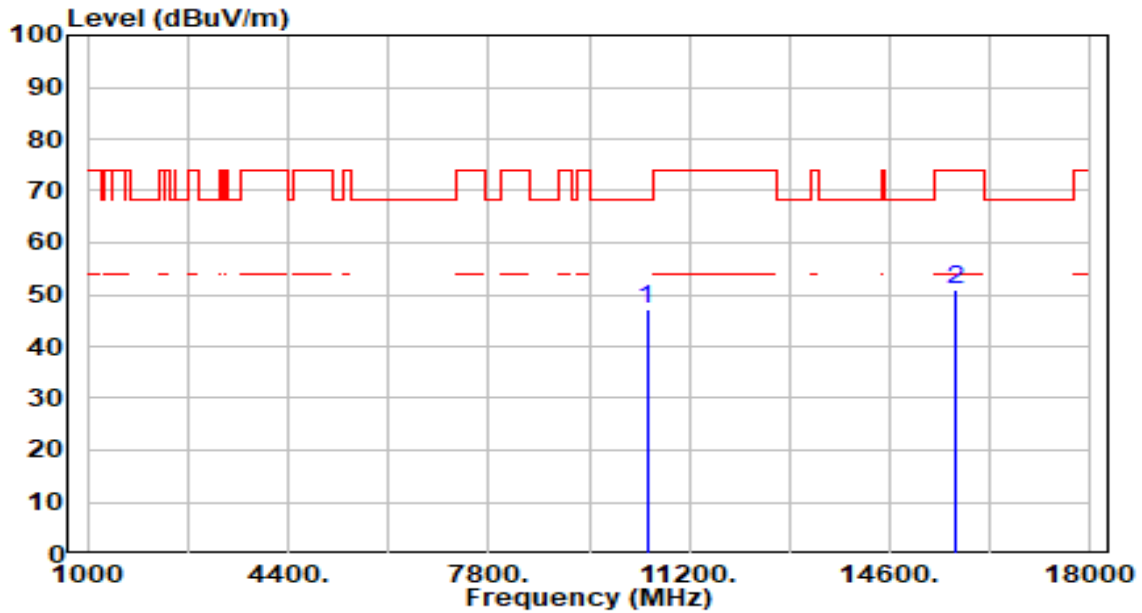


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	42.57	4.65	47.23	-20.97	68.20	200	345	Peak
2		15720.000	44.42	6.43	50.85	-23.15	74.00	200	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

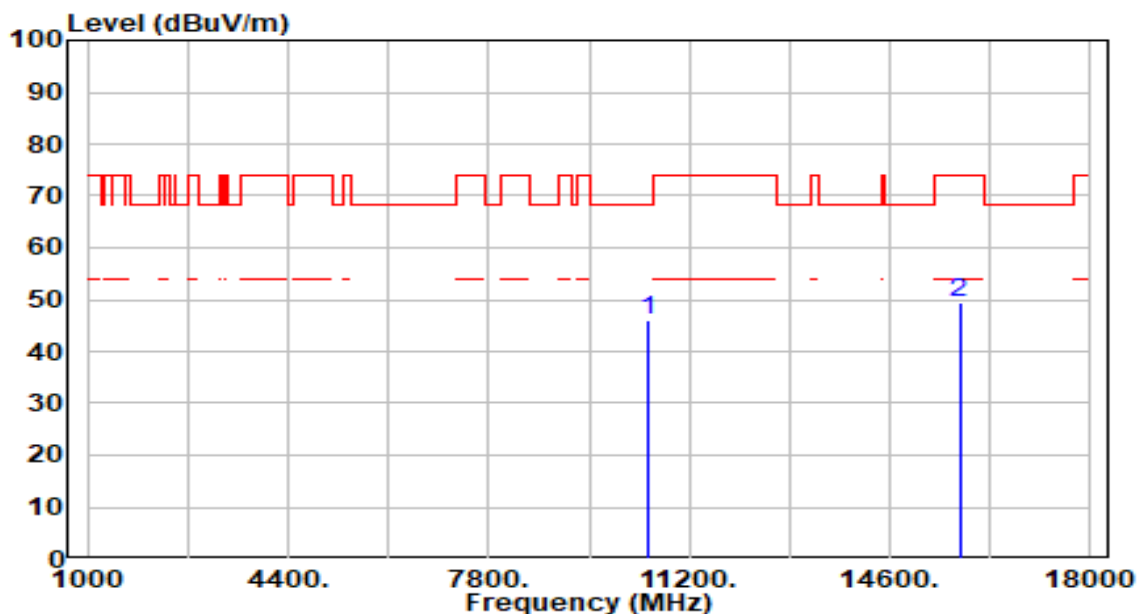


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.55	4.61	46.16	-22.04	68.20	200	69	Peak
2		15780.000	42.95	6.55	49.50	-24.50	74.00	200	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

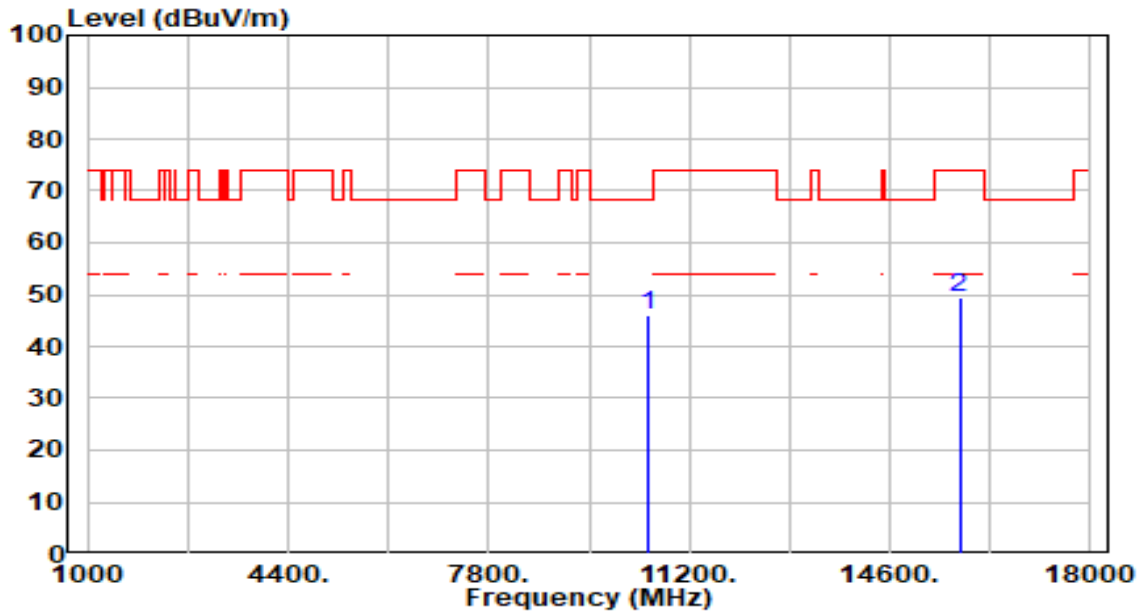


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.46	4.61	46.07	-22.13	68.20	200	47	Peak
2		15780.000	42.73	6.55	49.28	-24.72	74.00	200	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

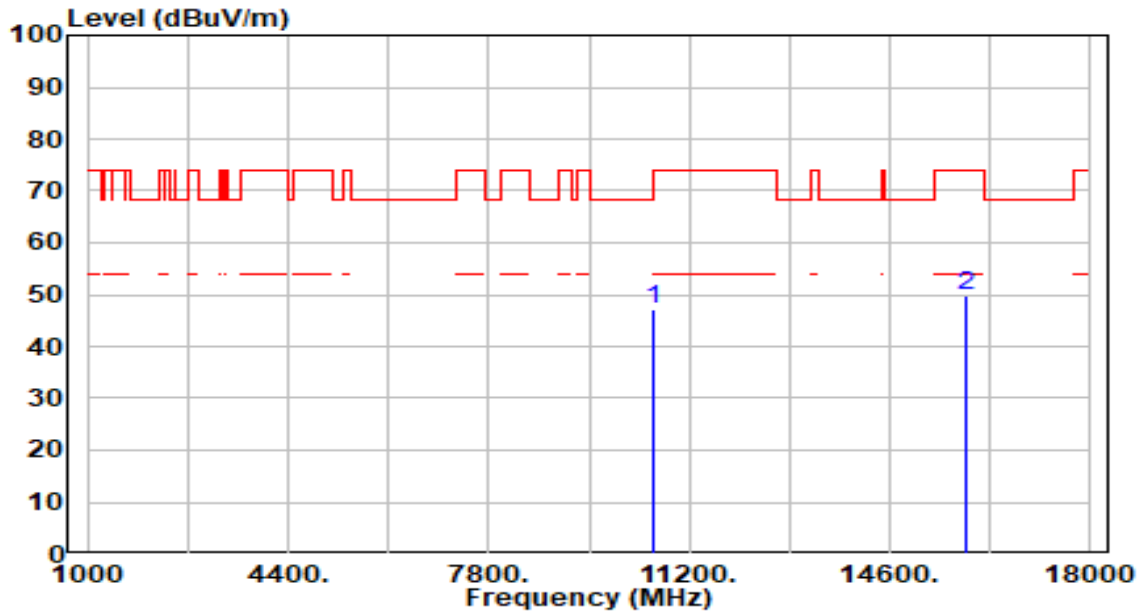


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.73	4.55	47.28	-20.92	68.20	200	77	Peak
2		15900.000	43.19	6.64	49.83	-24.17	74.00	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

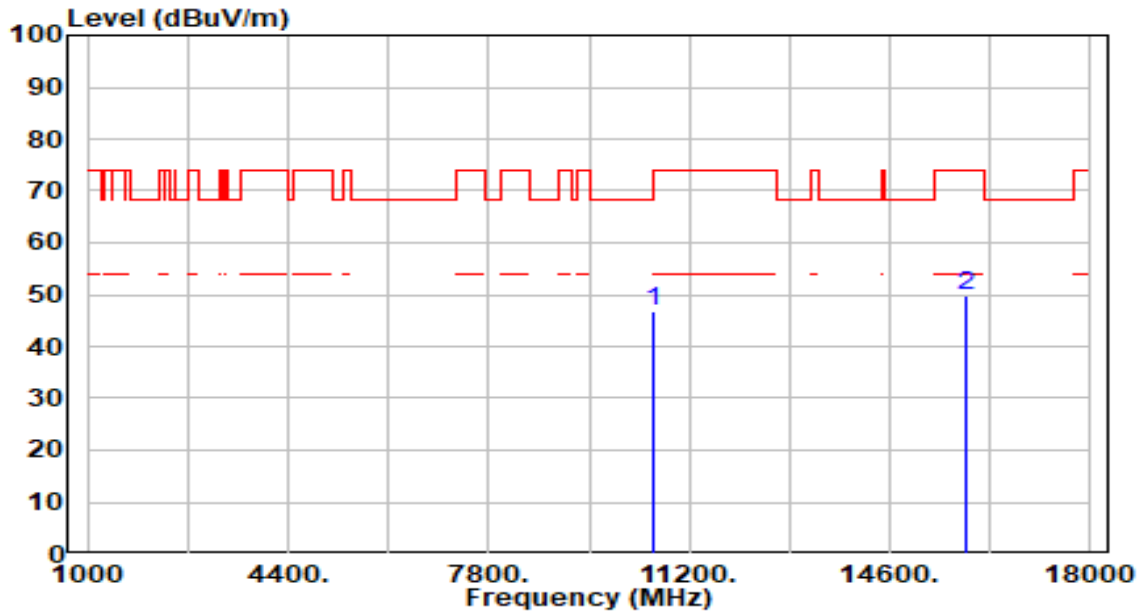


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.19	4.55	46.74	-21.46	68.20	200	272	Peak
2		15900.000	43.22	6.64	49.86	-24.14	74.00	200	327	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

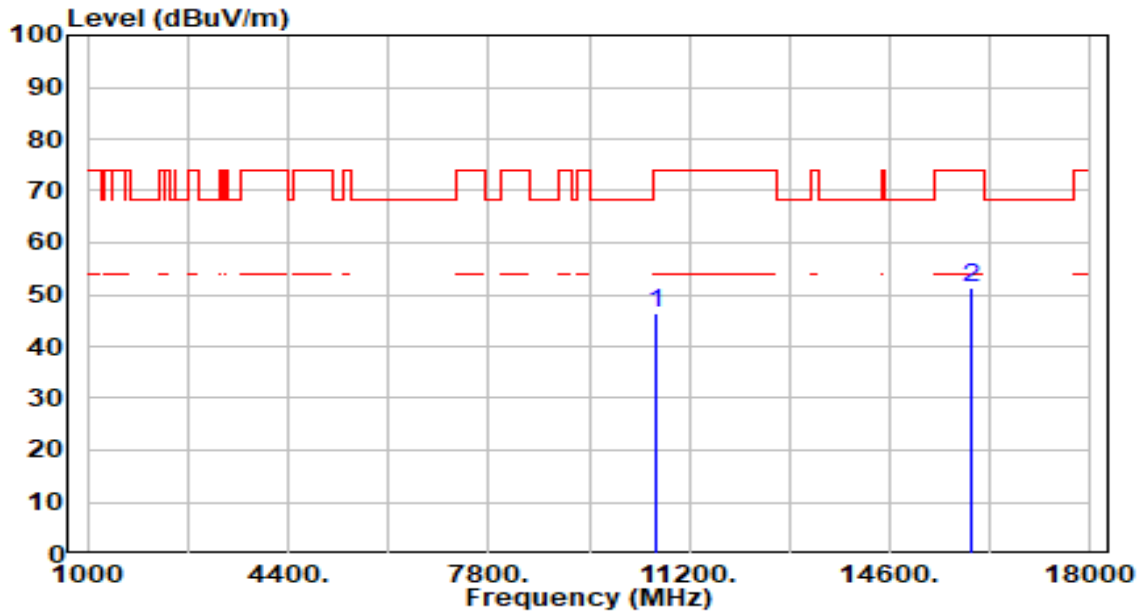


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.74	4.58	46.32	-27.68	74.00	200	116	Peak
2	*	15960.000	44.47	6.67	51.14	-22.86	74.00	200	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

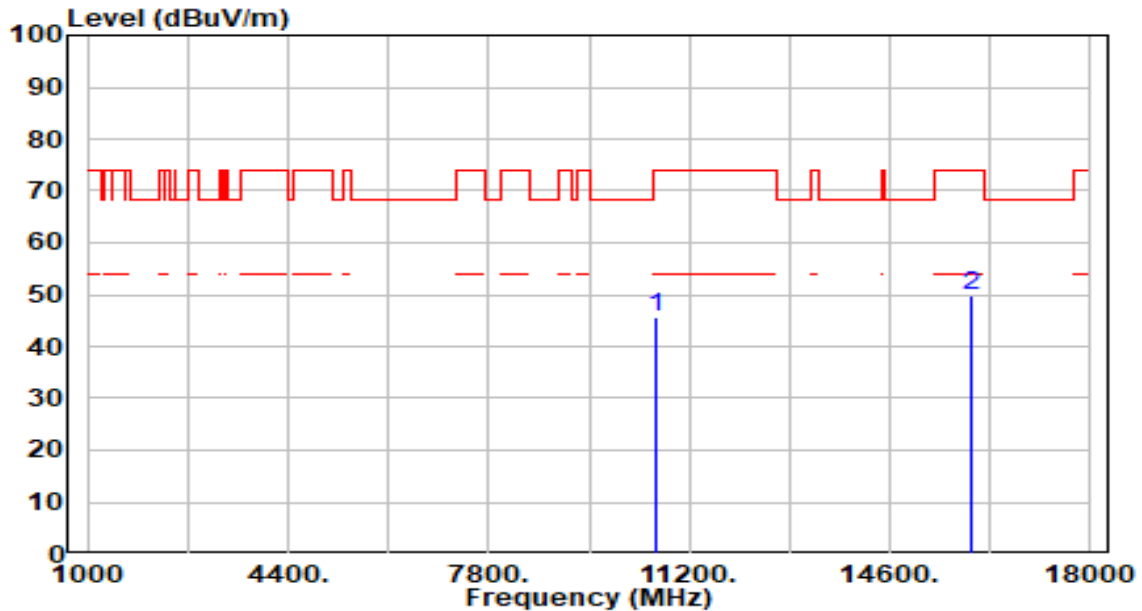


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.24	4.58	45.82	-28.18	74.00	200	234	Peak
2	* 15960.000	43.24	6.67	49.91	-24.09	74.00	200	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

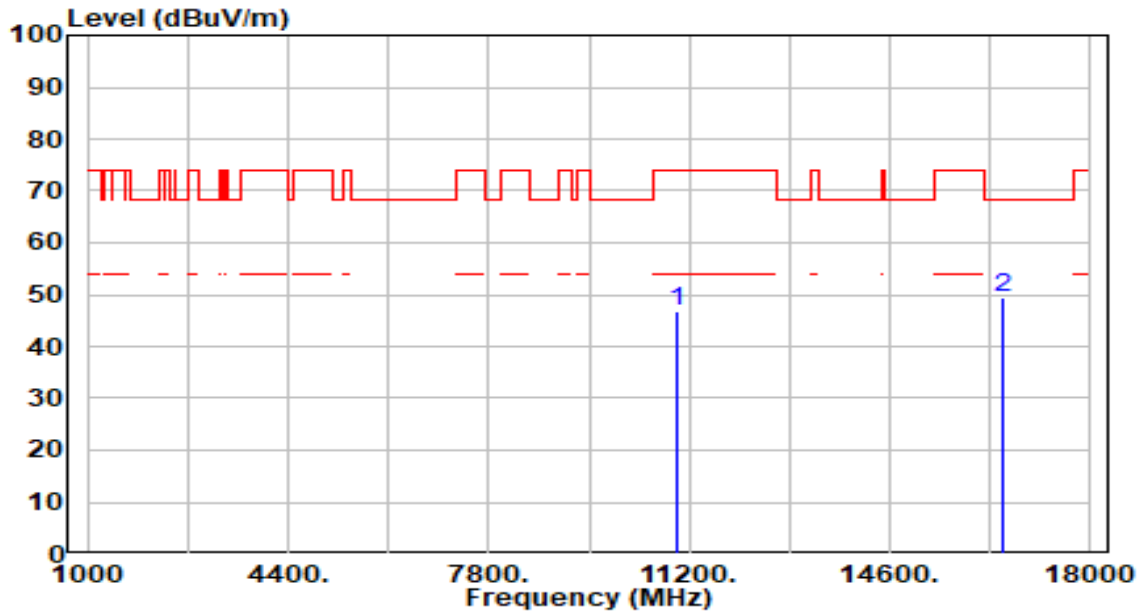


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.26	4.44	46.70	-27.30	74.00	200	78	Peak
2	*	16500.000	43.42	6.07	49.49	-18.71	68.20	200	41	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

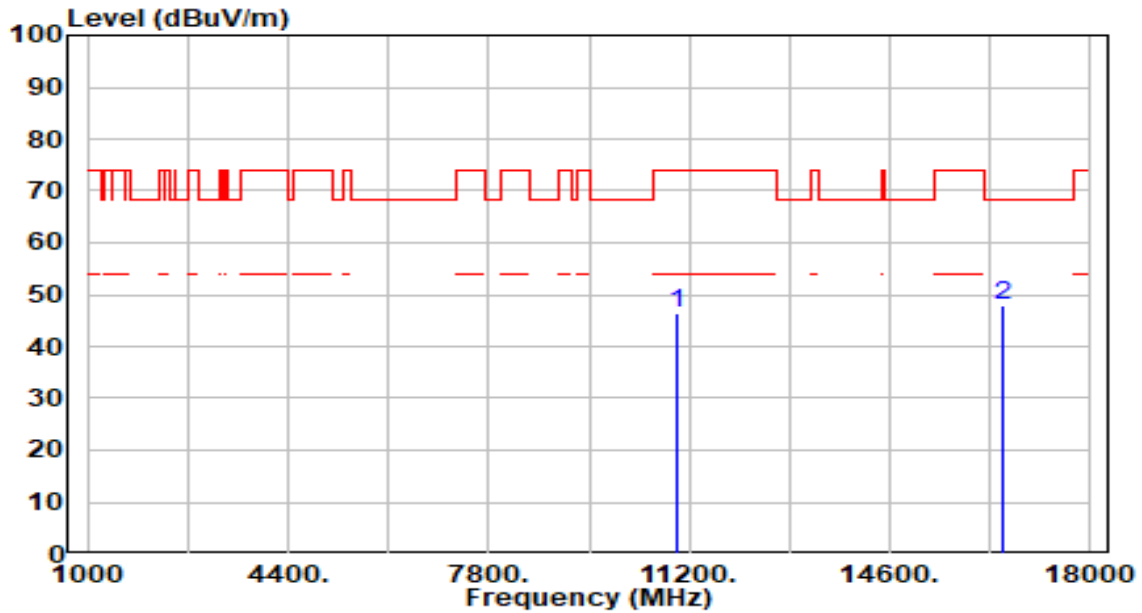


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.12	4.44	46.56	-27.44	74.00	200	47	Peak
2	*	16500.000	41.68	6.07	47.75	-20.45	68.20	200	107	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

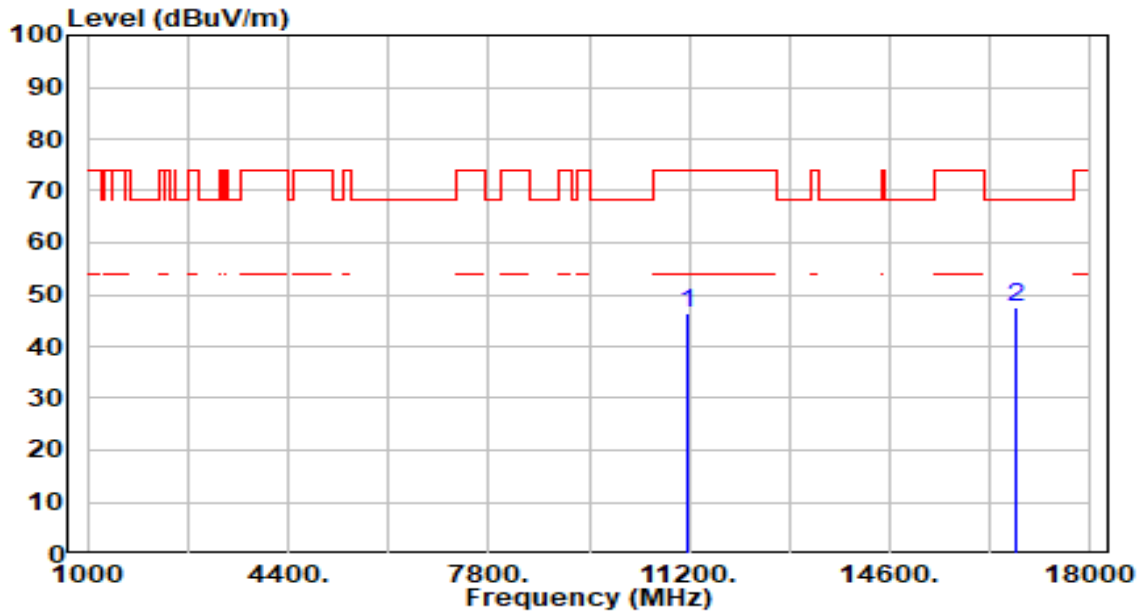


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.56	4.87	46.43	-27.57	74.00	200	77	Peak
2	*	16740.000	41.61	6.01	47.62	-20.58	68.20	200	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

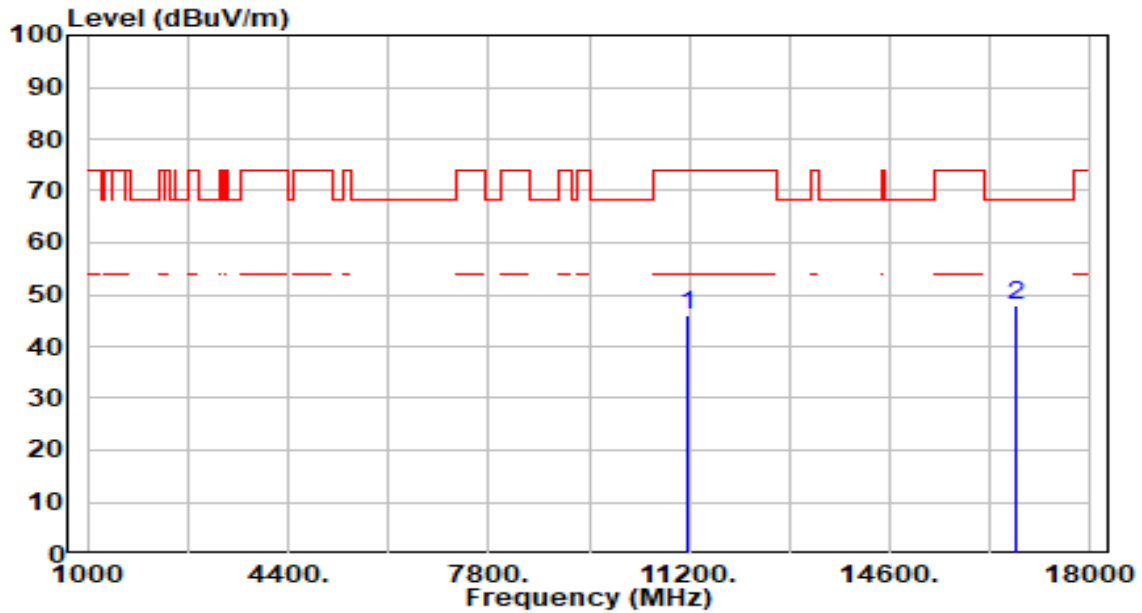


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.28	4.87	46.15	-27.85	74.00	200	47	Peak
2	*	16740.000	42.00	6.01	48.01	-20.19	68.20	200	79	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

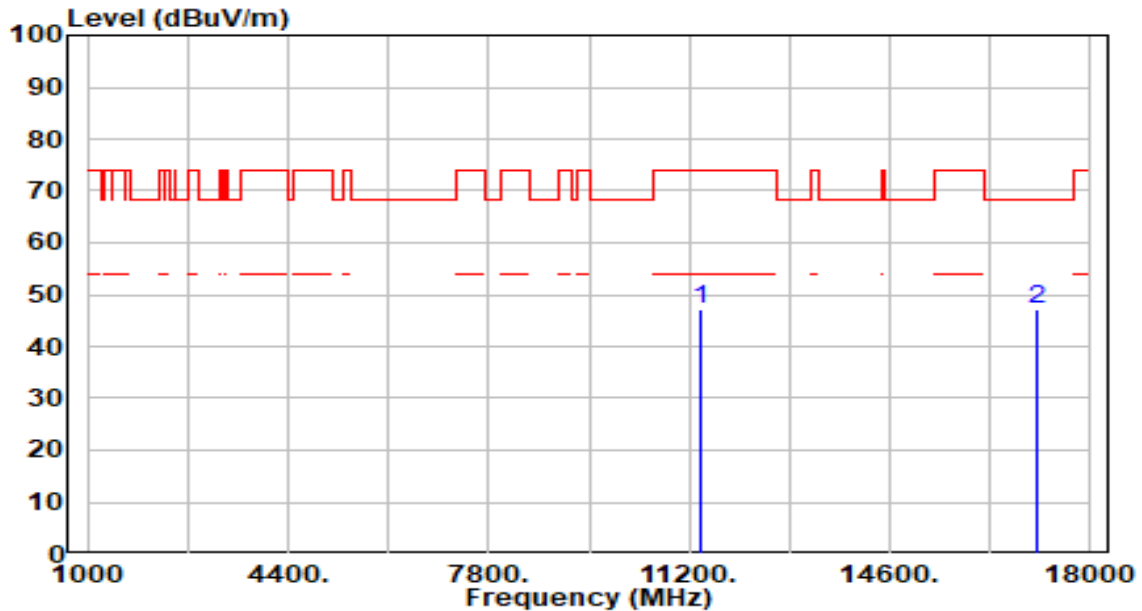


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.82	5.22	47.04	-26.96	74.00	200	172	Peak
2	*	17100.000	41.56	5.54	47.10	-21.10	68.20	200	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

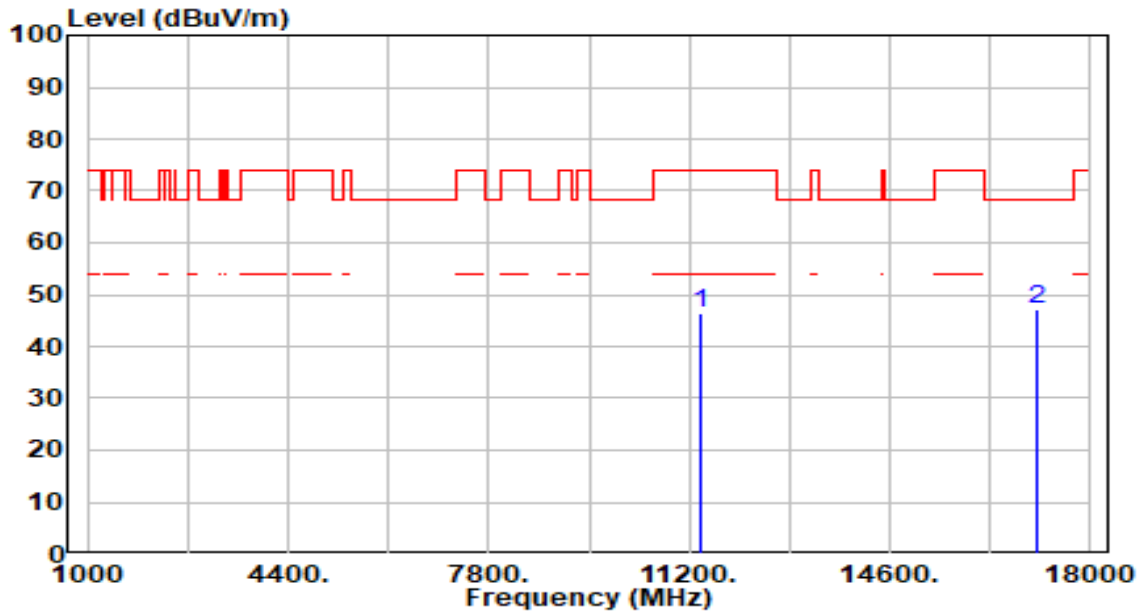


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.12	5.22	46.34	-27.66	74.00	200	0	Peak
2	*	17100.000	41.56	5.54	47.10	-21.10	68.20	200	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

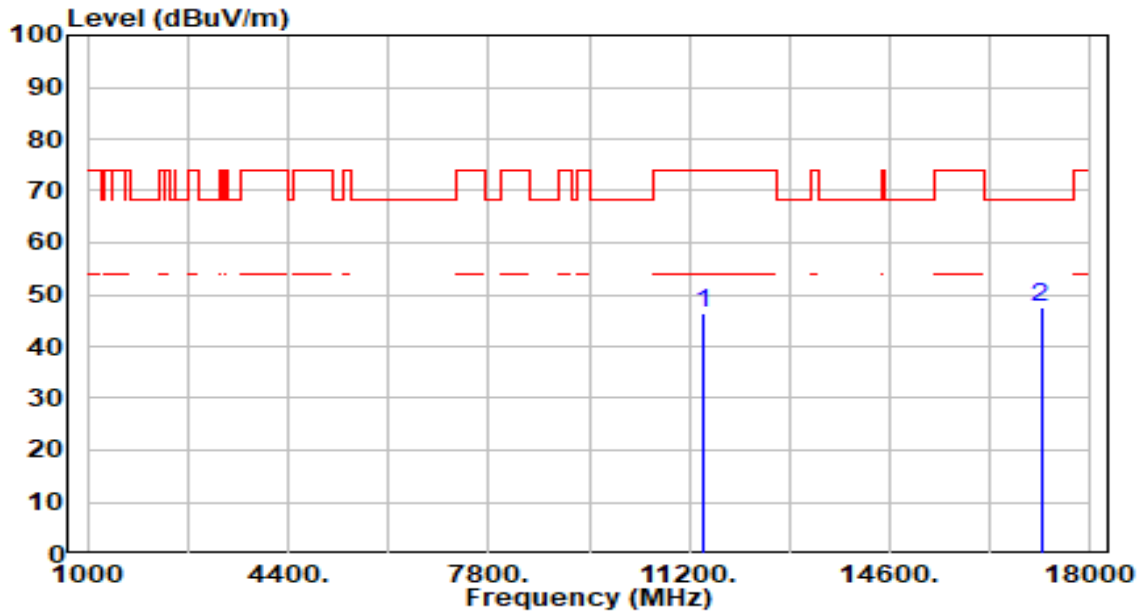


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.04	5.24	46.28	-27.72	74.00	200	78	Peak
2	*	17160.000	42.09	5.41	47.50	-20.70	68.20	200	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

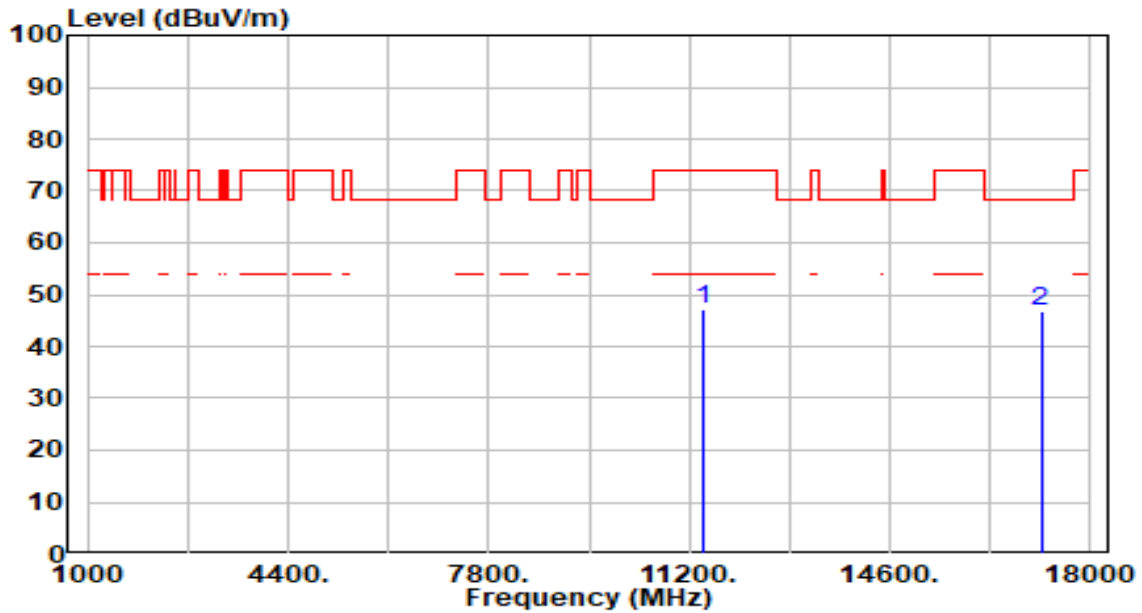


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.75	5.24	46.99	-27.01	74.00	200	0	Peak
2	*	17160.000	41.42	5.41	46.83	-21.37	68.20	200	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

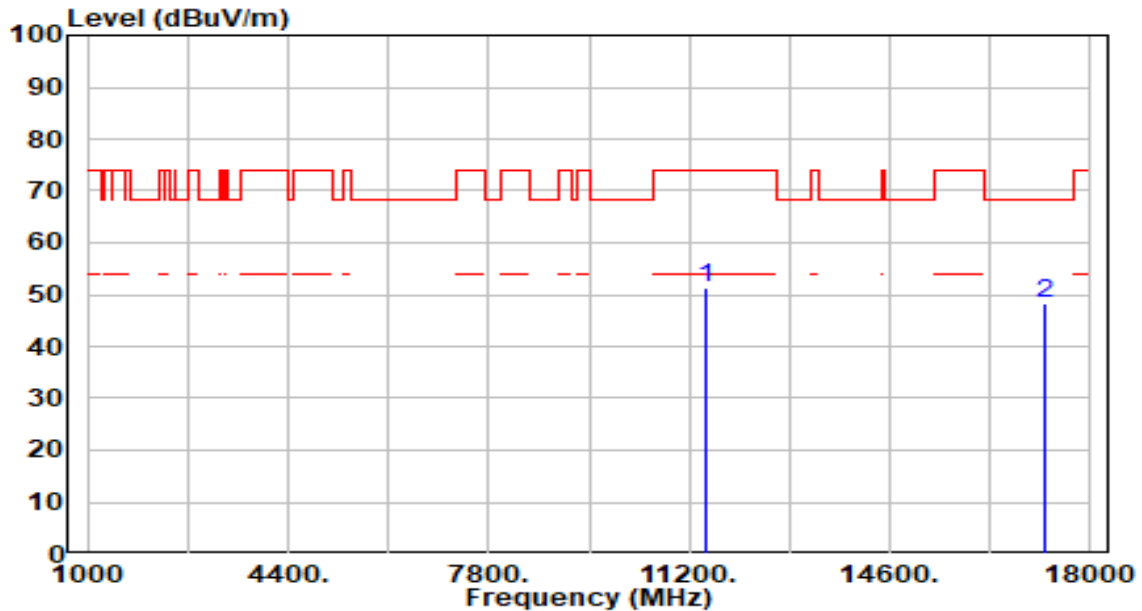


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	45.87	5.28	51.15	-22.85	74.00	200	287	Peak
2	*	17235.000	43.17	5.25	48.42	-19.78	68.20	200	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

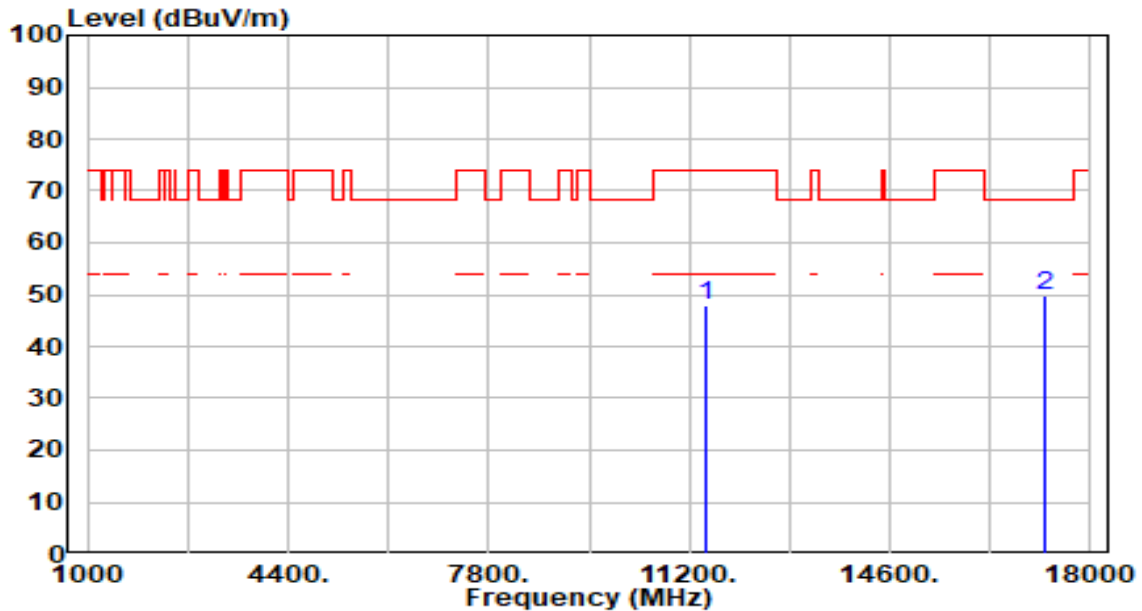


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	42.59	5.28	47.86	-26.14	74.00	200	137	Peak
2	*	17235.000	44.55	5.25	49.80	-18.40	68.20	200	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

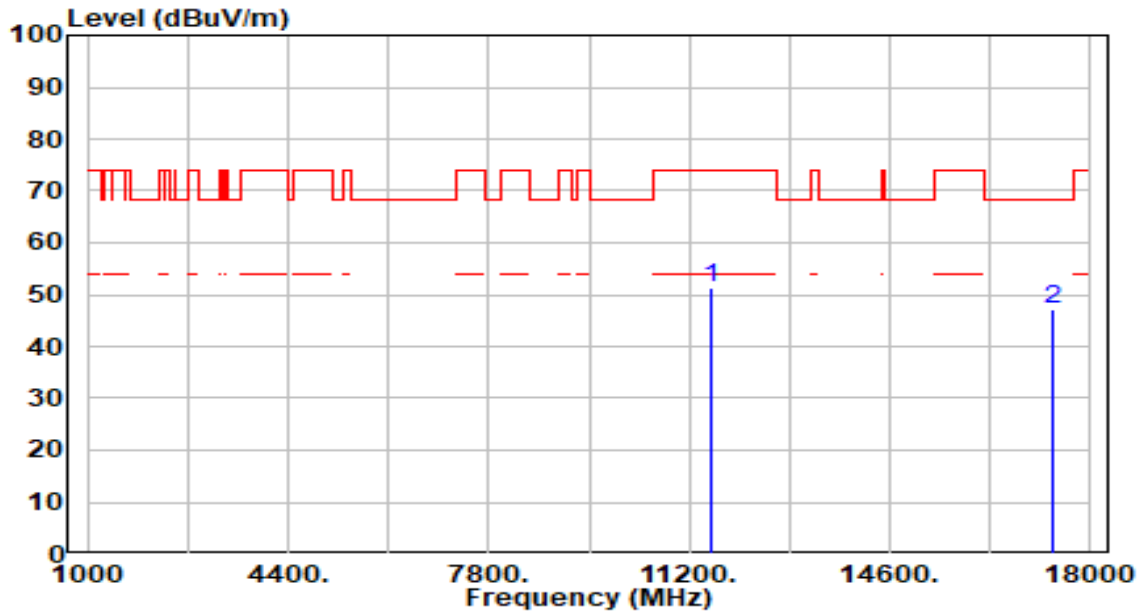


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	45.81	5.35	51.16	-22.84	74.00	200	270	Peak
2	*	17355.000	42.33	4.99	47.32	-20.88	68.20	200	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

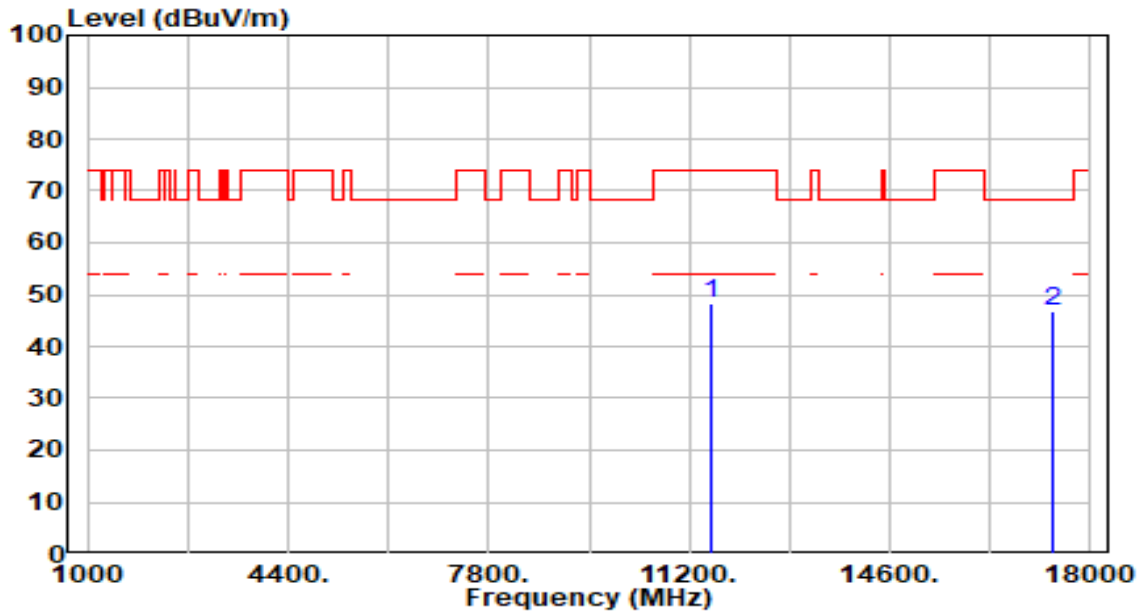


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	42.87	5.35	48.22	-25.78	74.00	200	0	Peak
2	*	17355.000	41.92	4.99	46.91	-21.29	68.20	200	257	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

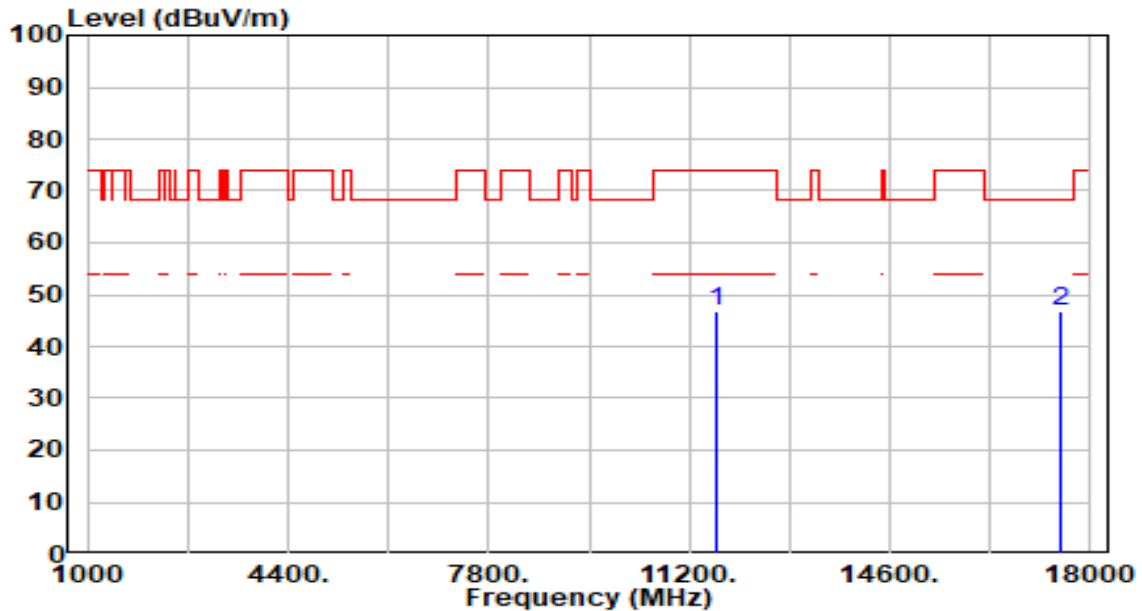


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.41	5.37	46.78	-27.22	74.00	200	134	Peak
2	*	17475.000	41.89	5.02	46.91	-21.29	68.20	200	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

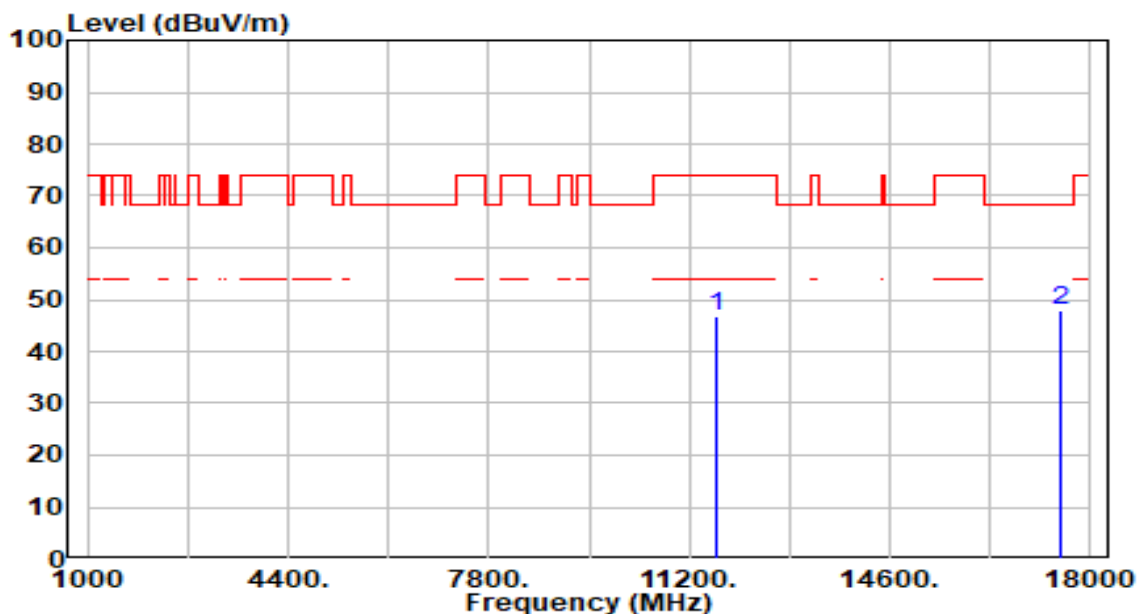


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.57	5.37	46.94	-27.06	74.00	200	306	Peak
2	*	17475.000	42.89	5.02	47.92	-20.28	68.20	200	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

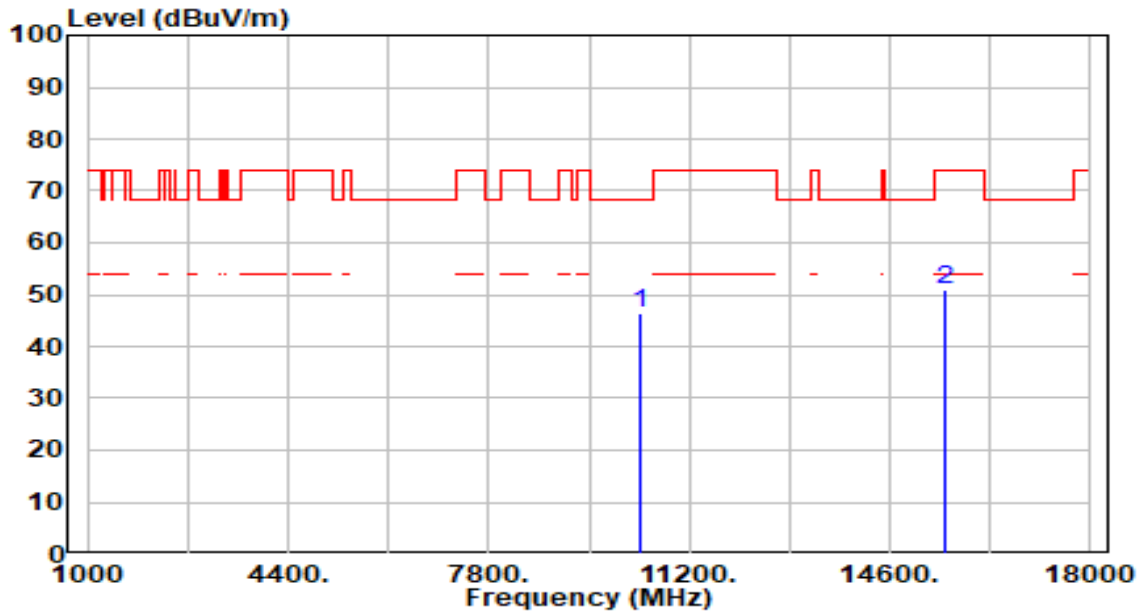


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.67	4.81	46.48	-21.72	68.20	200	4	Peak
2		15540.000	44.51	6.28	50.79	-23.21	74.00	200	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

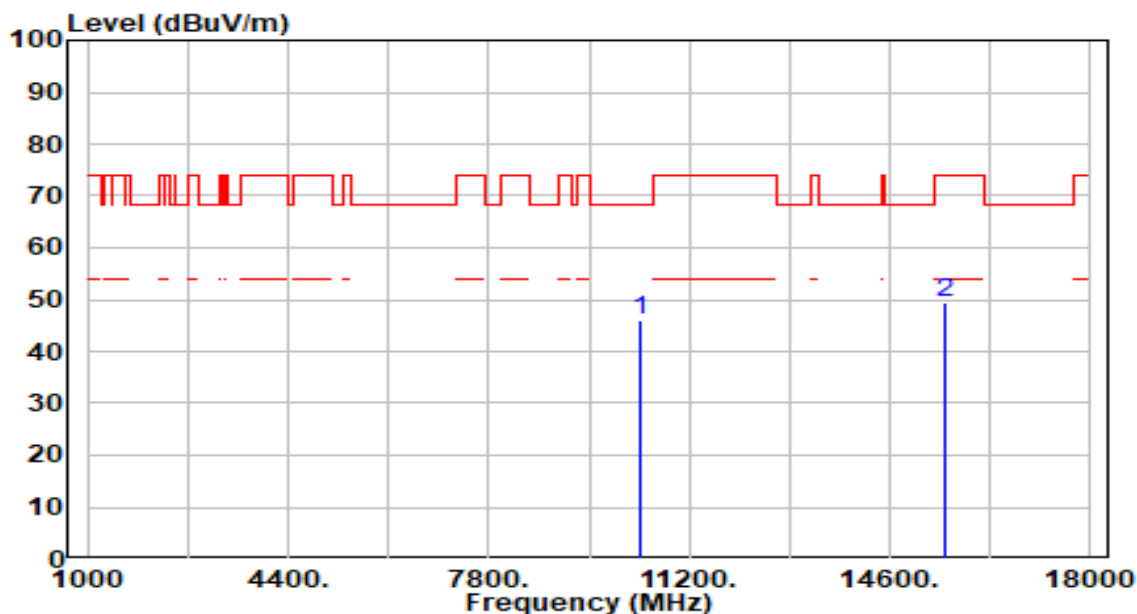


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.25	4.81	46.06	-22.14	68.20	200	69	Peak
2		15540.000	43.05	6.28	49.33	-24.67	74.00	200	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

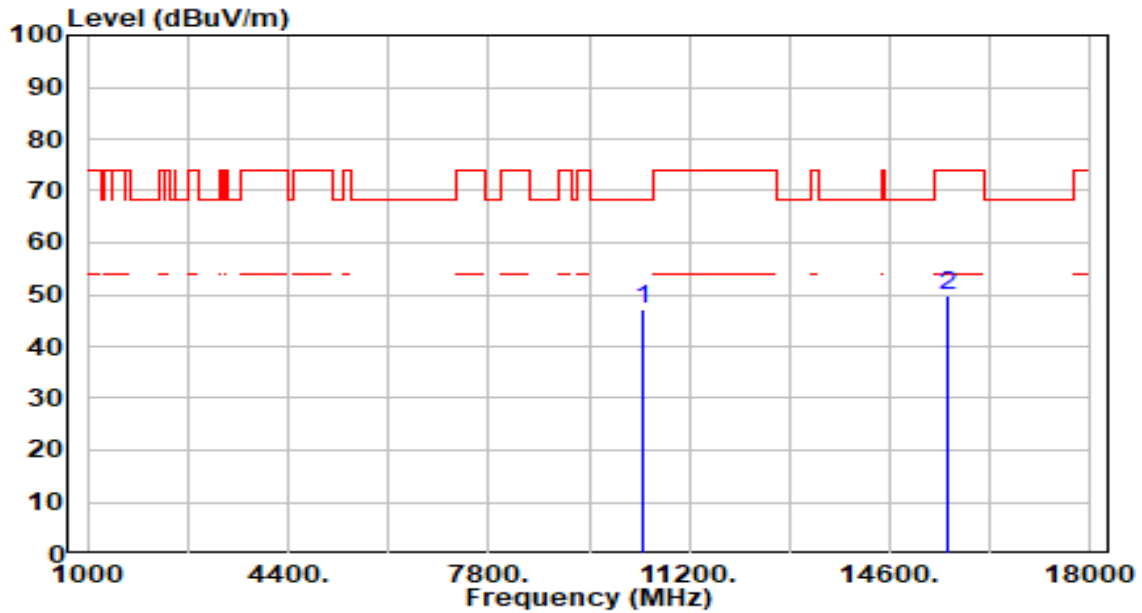


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	42.57	4.77	47.34	-20.86	68.20	200	108	Peak
2		15600.000	43.49	6.19	49.68	-24.32	74.00	200	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

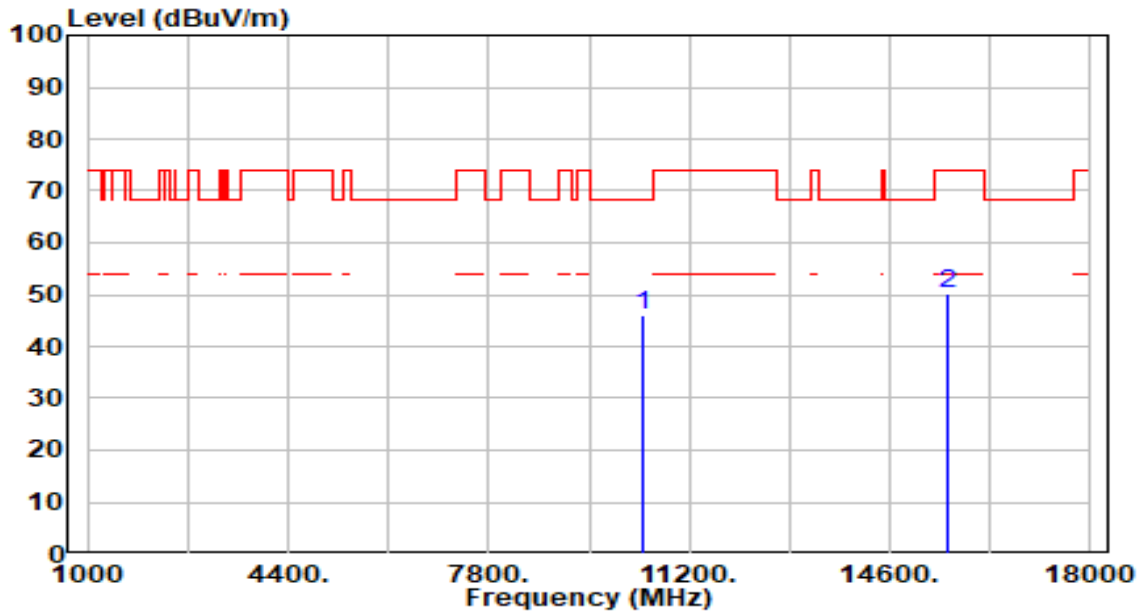


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.35	4.77	46.12	-22.08	68.20	200	200	Peak
2		15600.000	44.01	6.19	50.20	-23.80	74.00	200	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

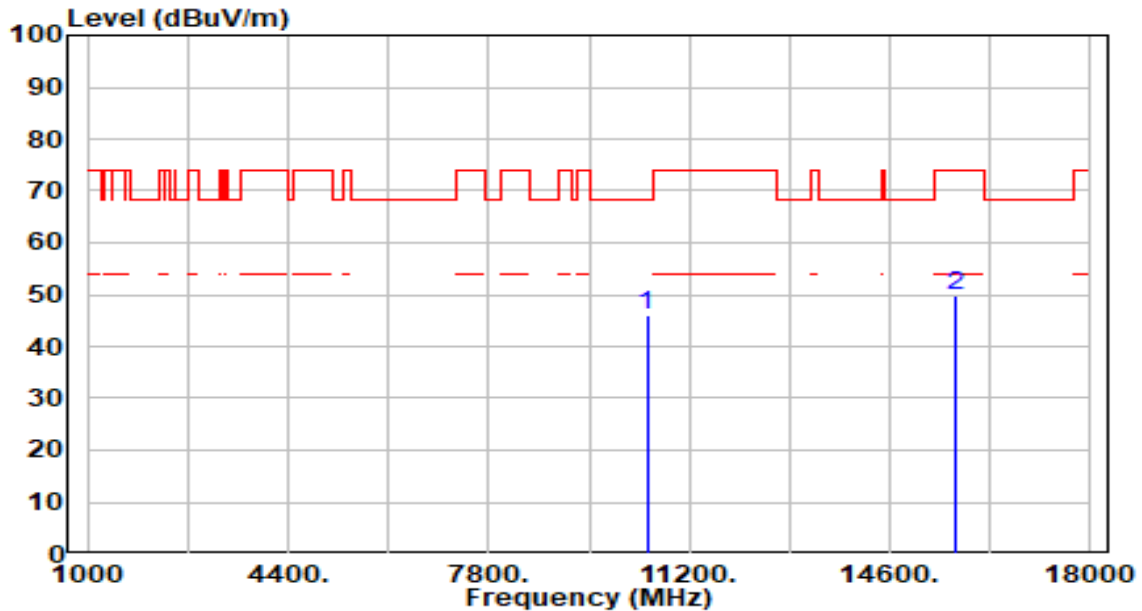


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.37	4.65	46.02	-22.18	68.20	200	117	Peak
2		15720.000	43.42	6.43	49.86	-24.14	74.00	200	117	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

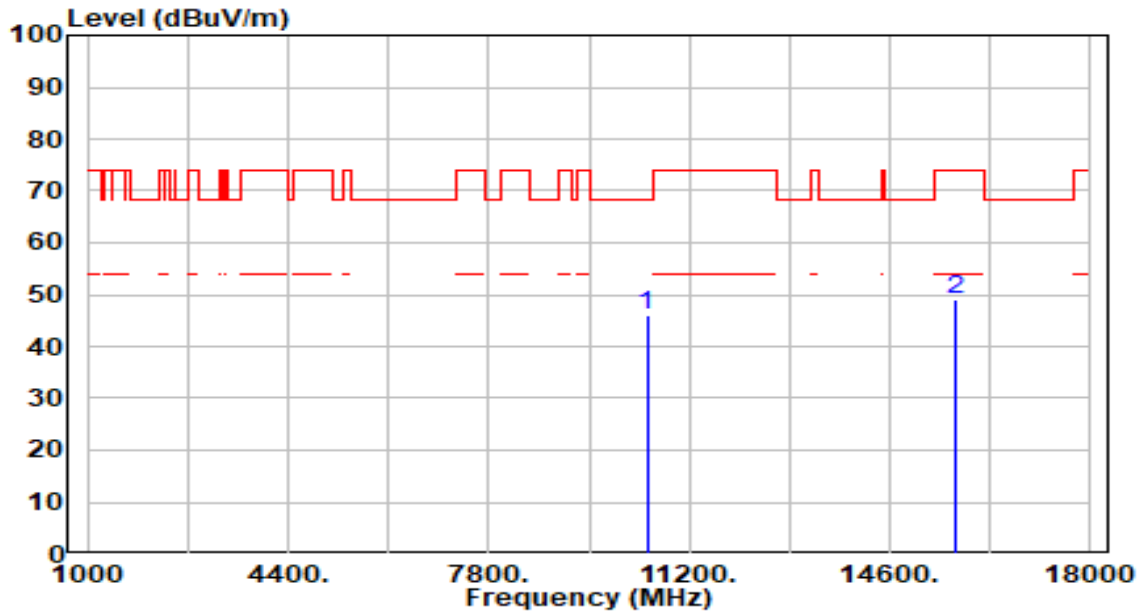


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.22	4.65	45.87	-22.33	68.20	200	69	Peak
2		15720.000	42.71	6.43	49.14	-24.86	74.00	200	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

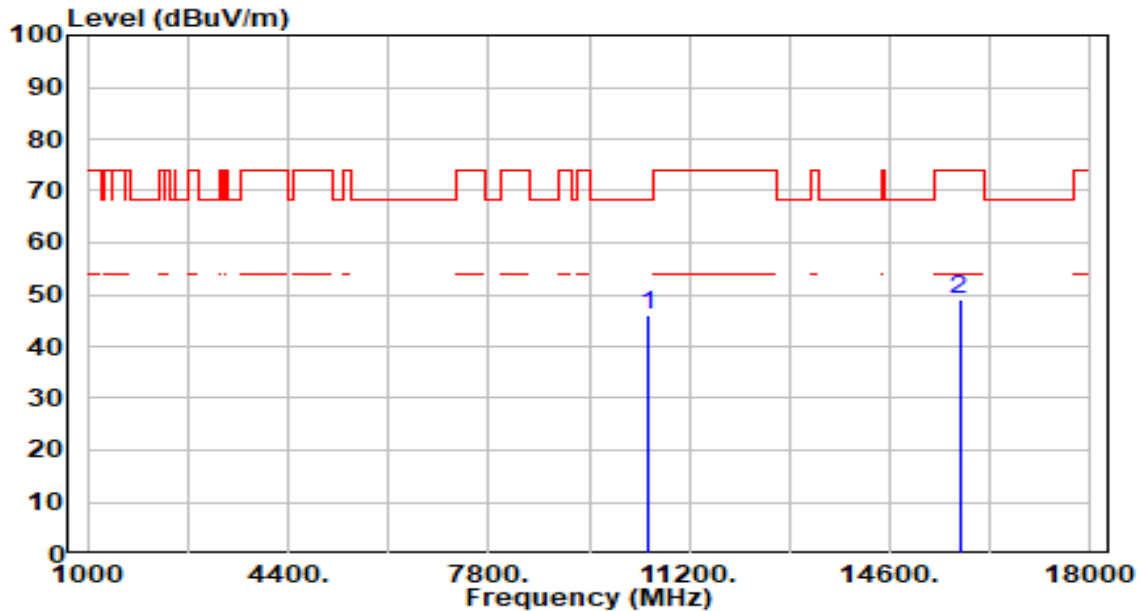


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.29	4.61	45.90	-22.30	68.20	200	180	Peak
2		15780.000	42.64	6.55	49.19	-24.81	74.00	200	69	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

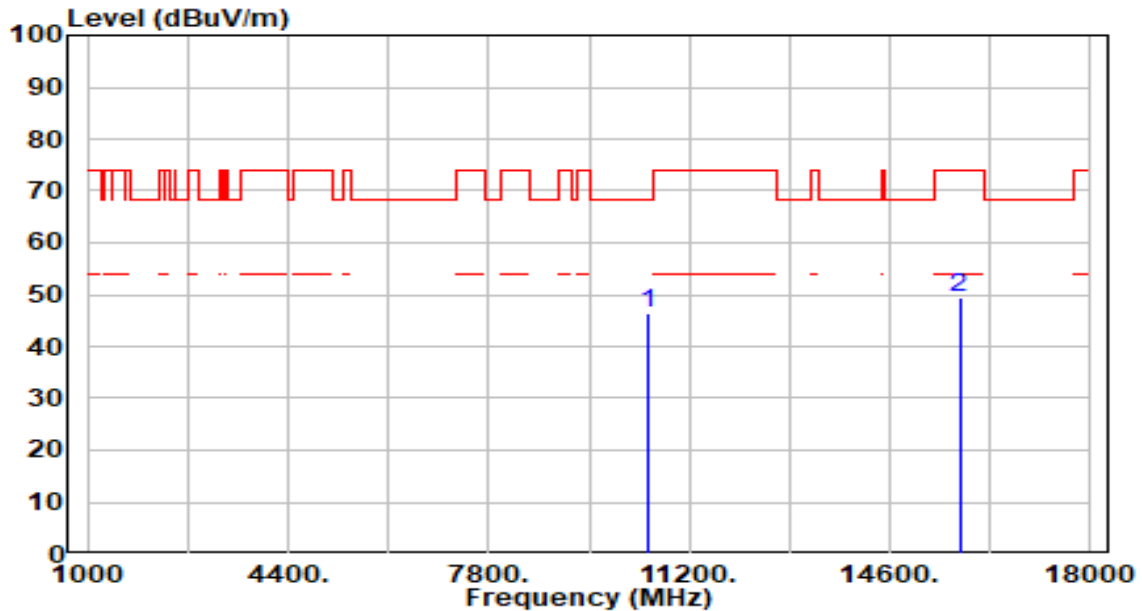


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.78	4.61	46.39	-21.81	68.20	200	47	Peak
2		15780.000	42.93	6.55	49.49	-24.51	74.00	200	78	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

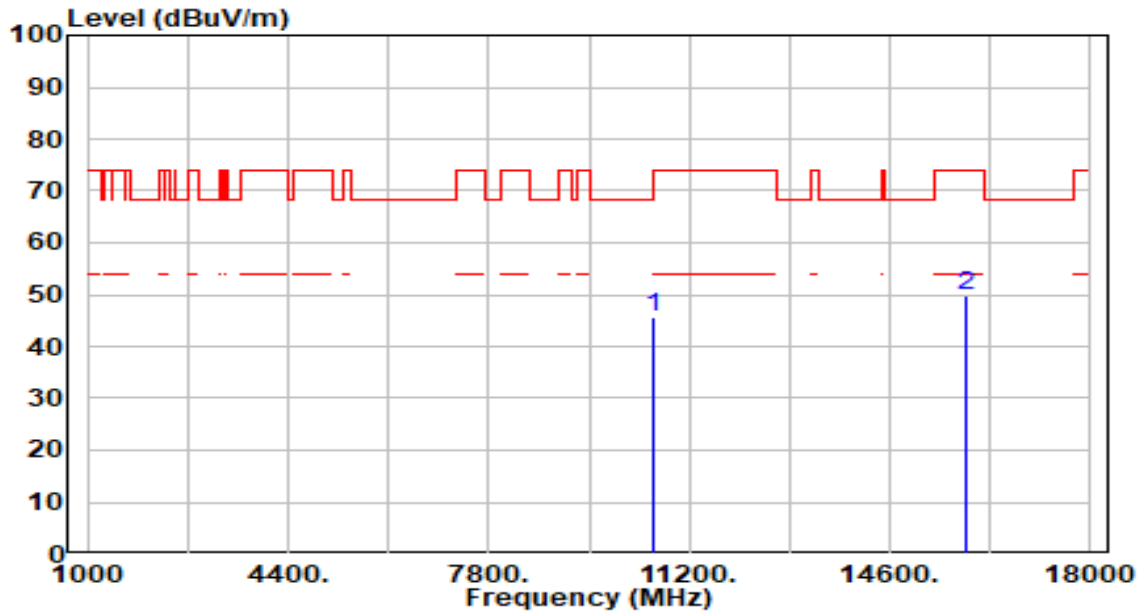


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.17	4.55	45.72	-22.48	68.20	200	77	Peak
2		15900.000	43.09	6.64	49.73	-24.27	74.00	200	224	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

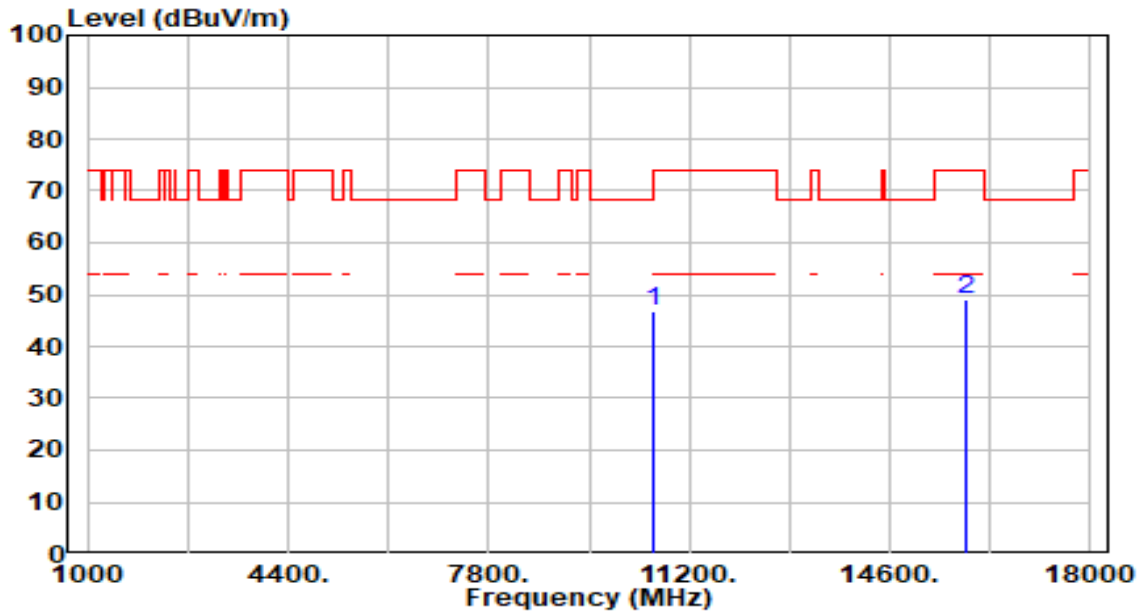


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.29	4.55	46.84	-21.36	68.20	200	69	Peak
2		15900.000	42.59	6.64	49.23	-24.77	74.00	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

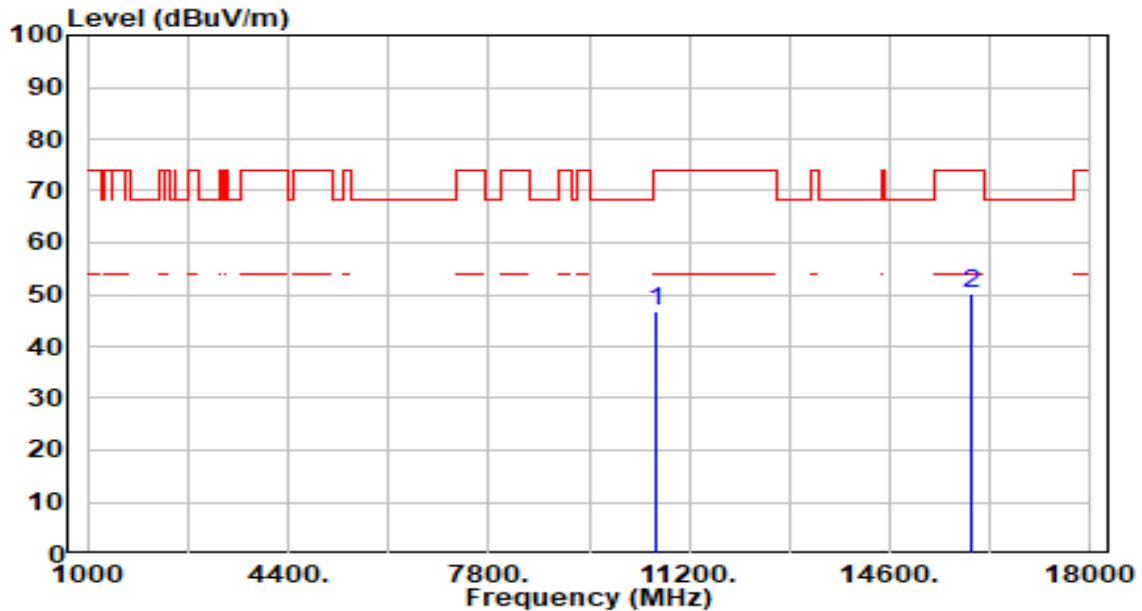


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	42.08	4.58	46.66	-27.34	74.00	200	77	Peak
2	*	15960.000	43.59	6.67	50.26	-23.74	74.00	200	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

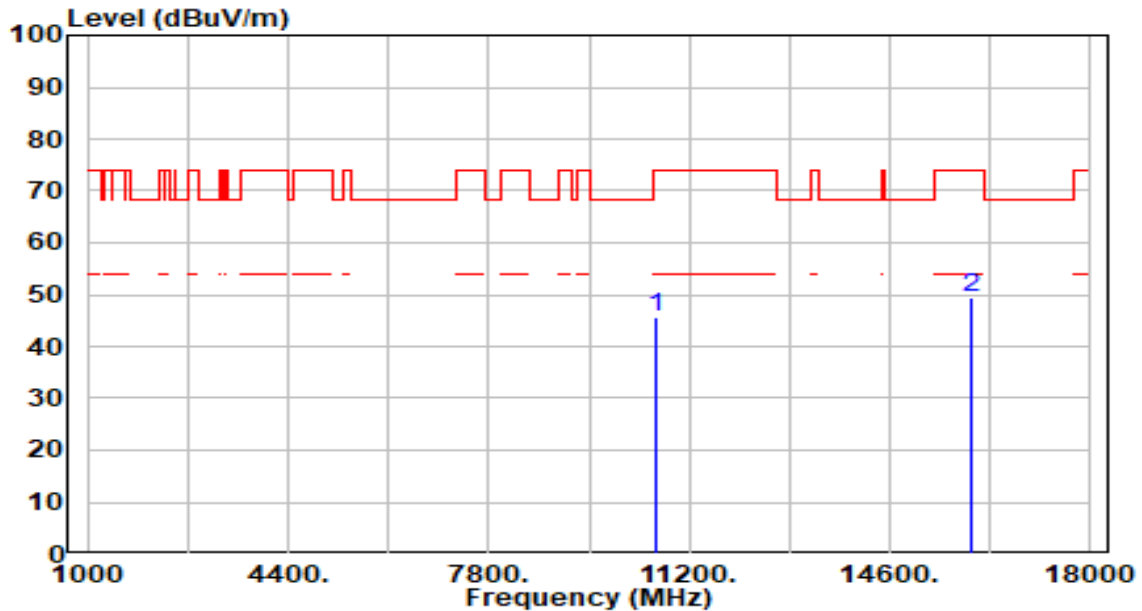


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.15	4.58	45.72	-28.28	74.00	200	117	Peak
2	*	15960.000	42.92	6.67	49.59	-24.41	74.00	200	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

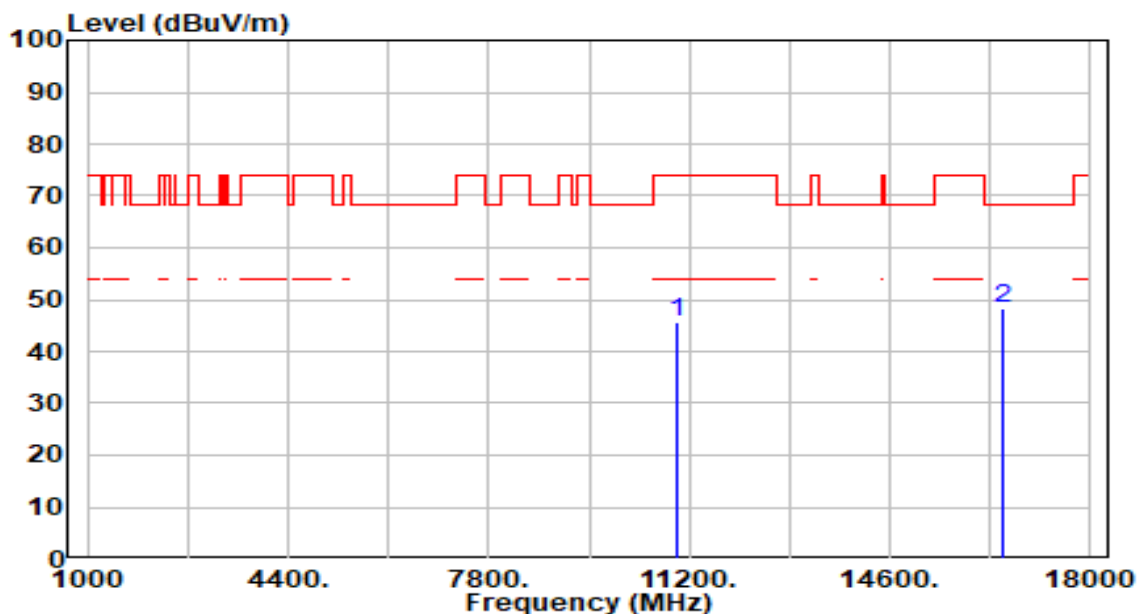


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.40	4.44	45.84	-28.16	74.00	200	0	Peak
2	*	16500.000	42.25	6.07	48.32	-19.88	68.20	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

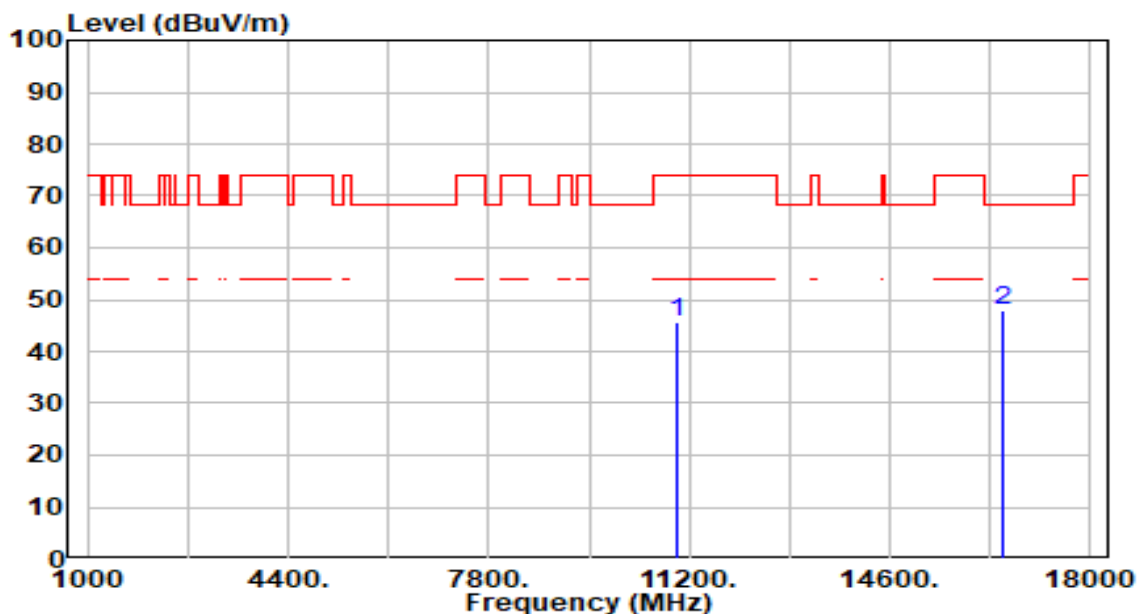


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.26	4.44	45.70	-28.30	74.00	200	15	Peak
2	*	16500.000	41.98	6.07	48.05	-20.15	68.20	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

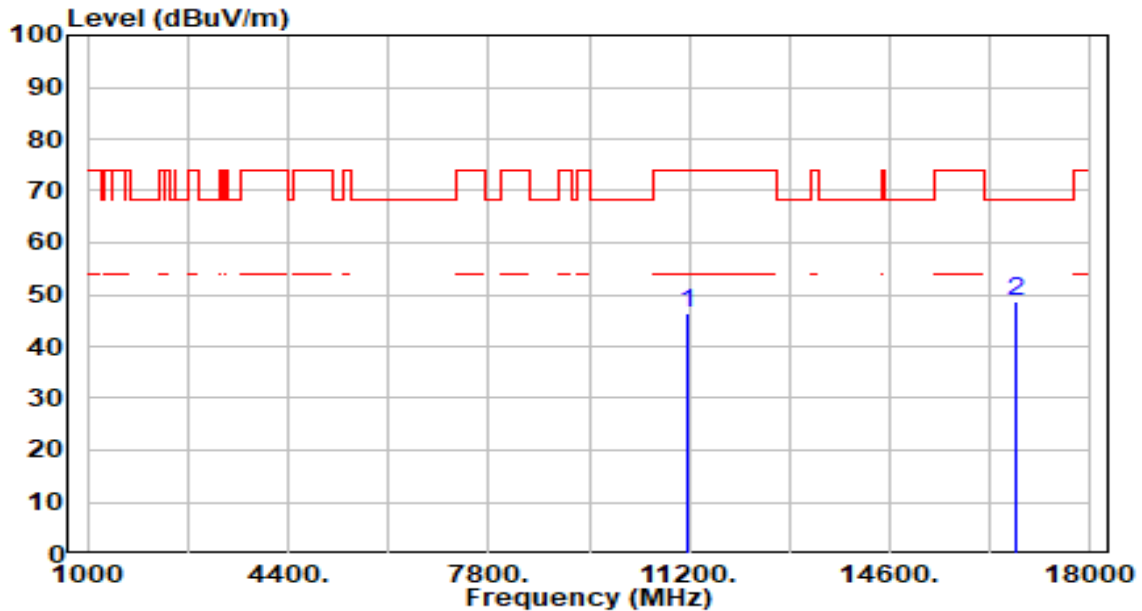


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.70	4.87	46.57	-27.43	74.00	200	100	Peak
2	*	16740.000	42.70	6.01	48.71	-19.49	68.20	200	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

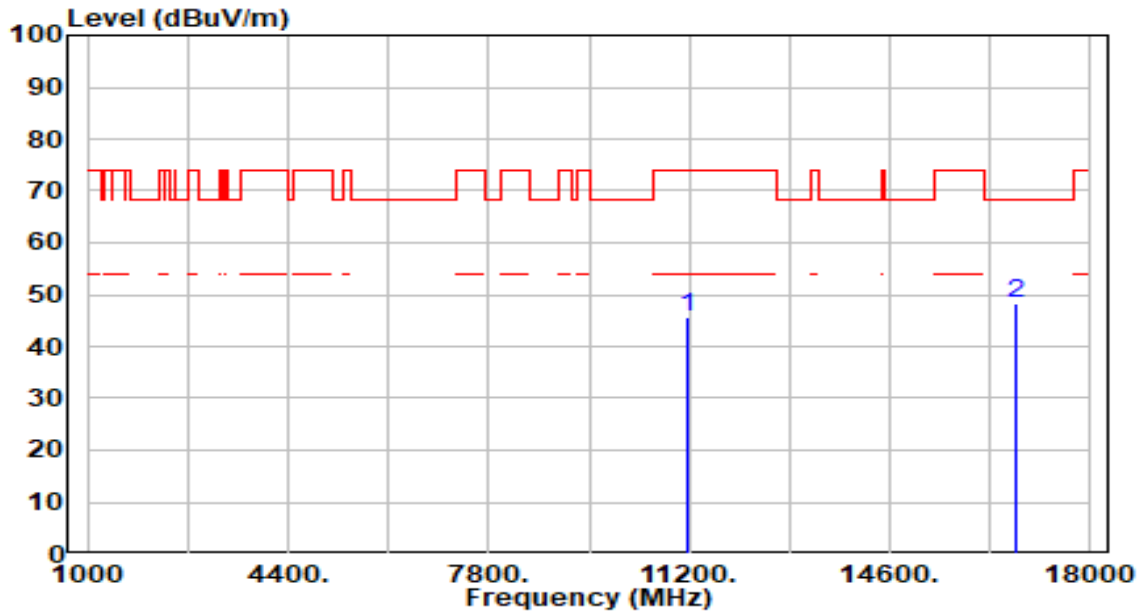


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	40.92	4.87	45.79	-28.21	74.00	200	36	Peak
2	* 16740.000	42.26	6.01	48.27	-19.93	68.20	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

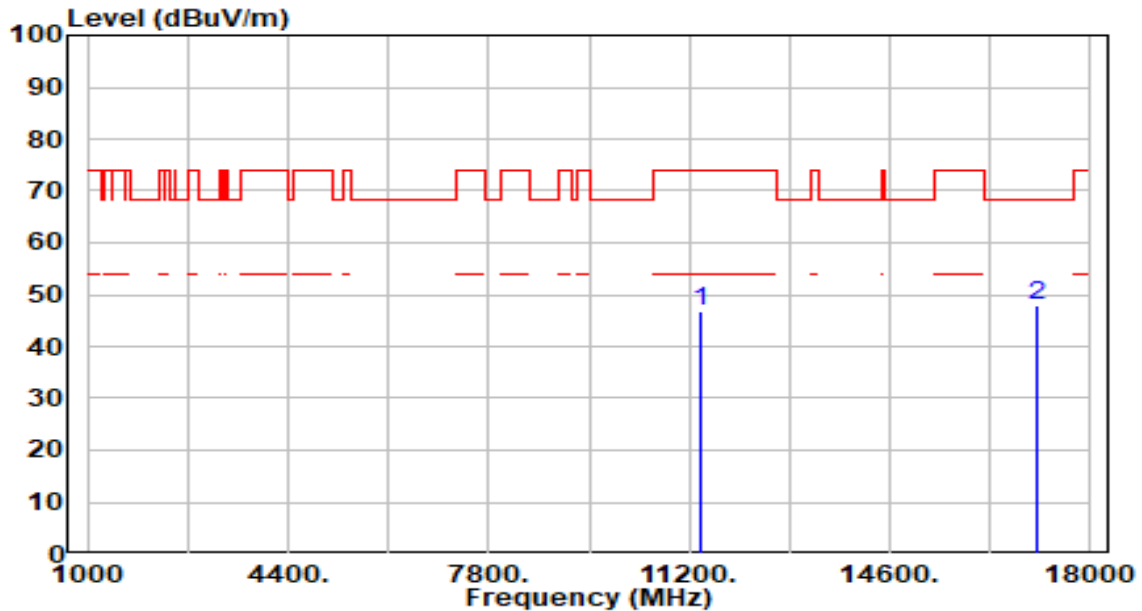


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.50	5.22	46.71	-27.29	74.00	200	345	Peak
2	*	17100.000	42.54	5.54	48.08	-20.12	68.20	200	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

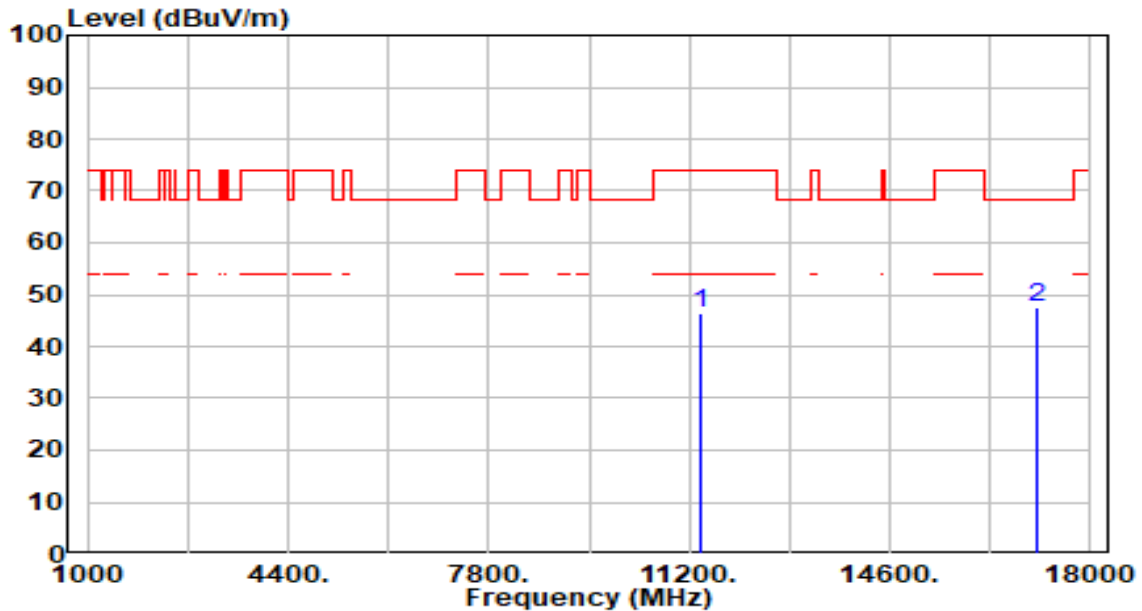


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.16	5.22	46.38	-27.62	74.00	200	94	Peak
2	*	17100.000	42.09	5.54	47.63	-20.57	68.20	200	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

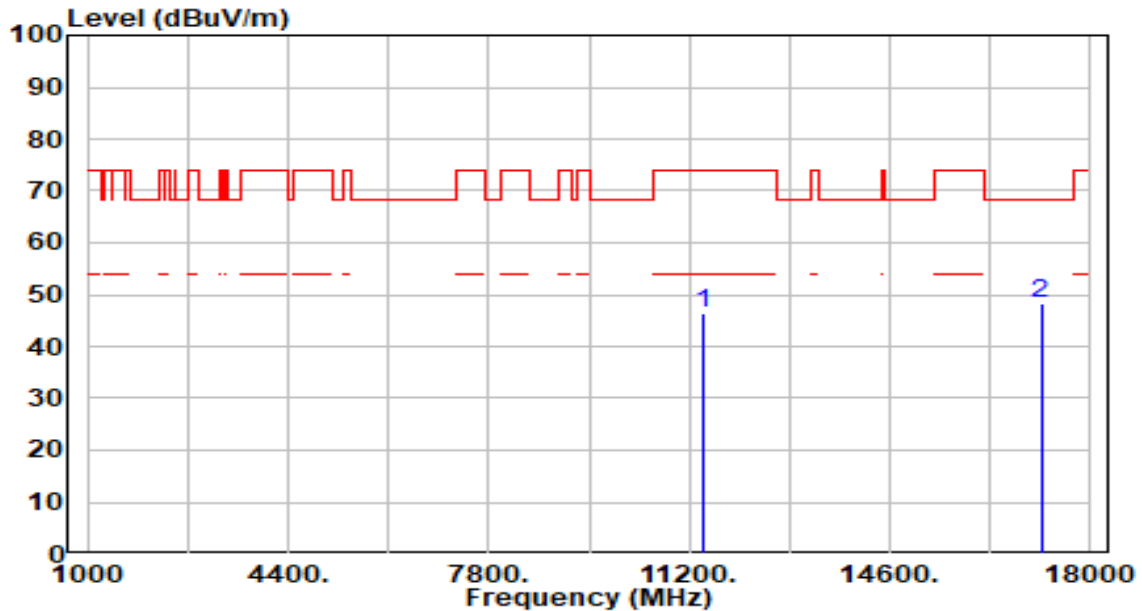


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.21	5.24	46.45	-27.55	74.00	200	0	Peak
2	*	17160.000	42.86	5.41	48.27	-19.93	68.20	200	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

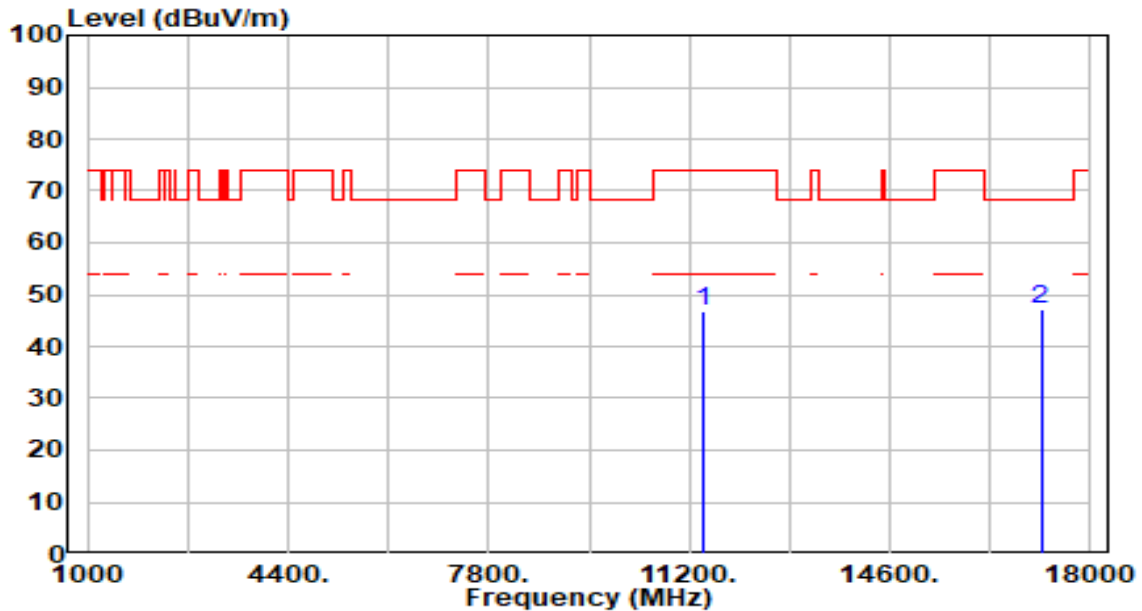


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.39	5.24	46.64	-27.36	74.00	200	1	Peak
2	*	17160.000	41.60	5.41	47.01	-21.19	68.20	200	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

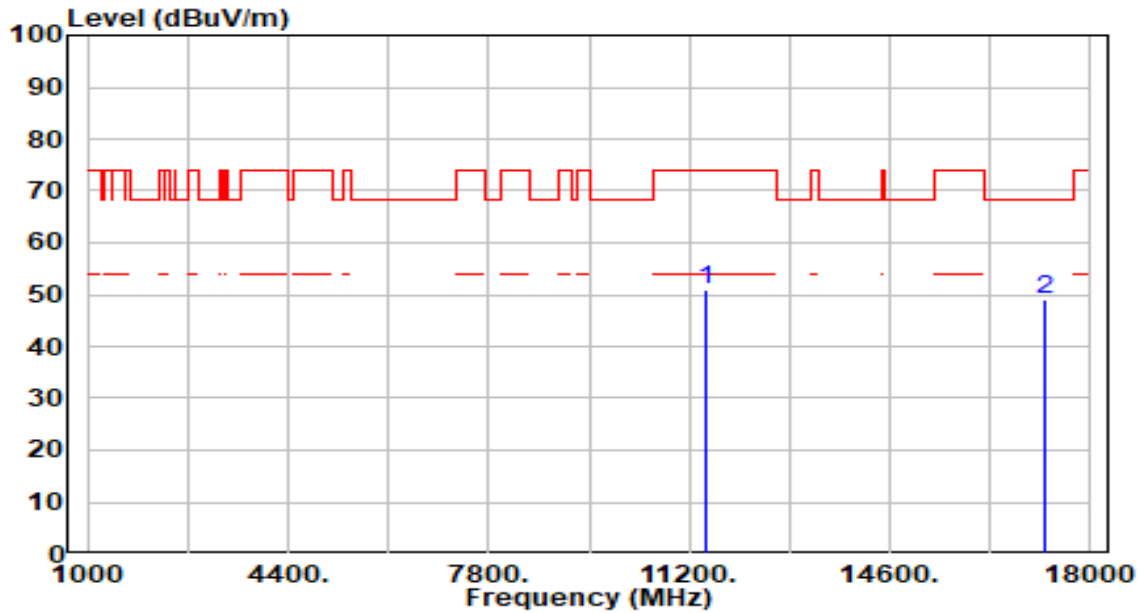


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	45.81	5.28	51.08	-22.92	74.00	200	288	Peak
2	*	17235.000	43.77	5.25	49.02	-19.18	68.20	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

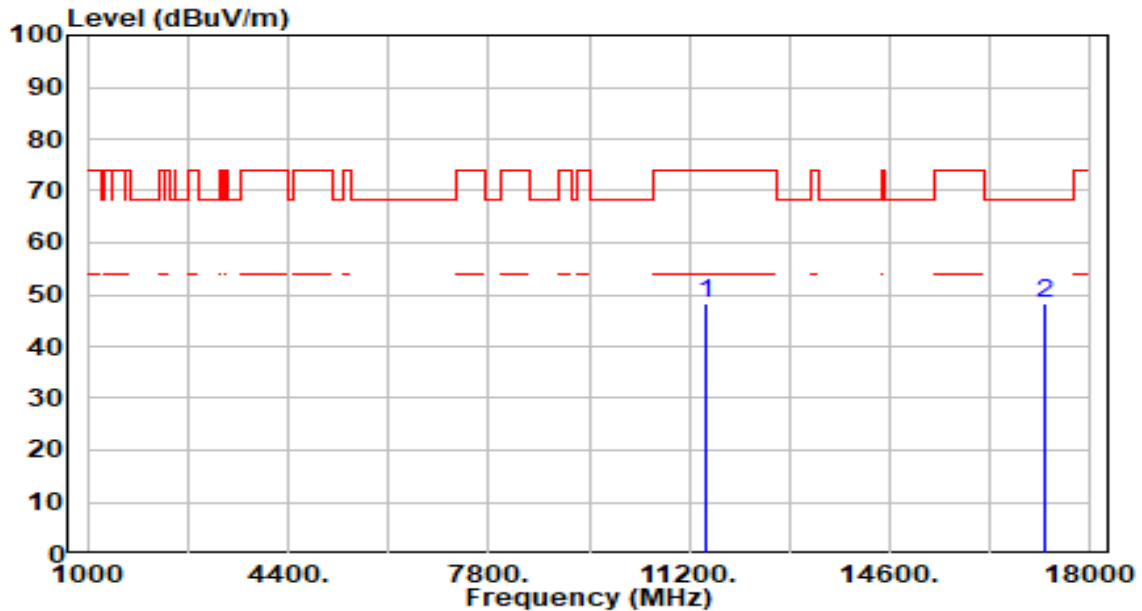


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	43.06	5.28	48.33	-25.67	74.00	200	360	Peak
2	*	17235.000	43.12	5.25	48.36	-19.84	68.20	200	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

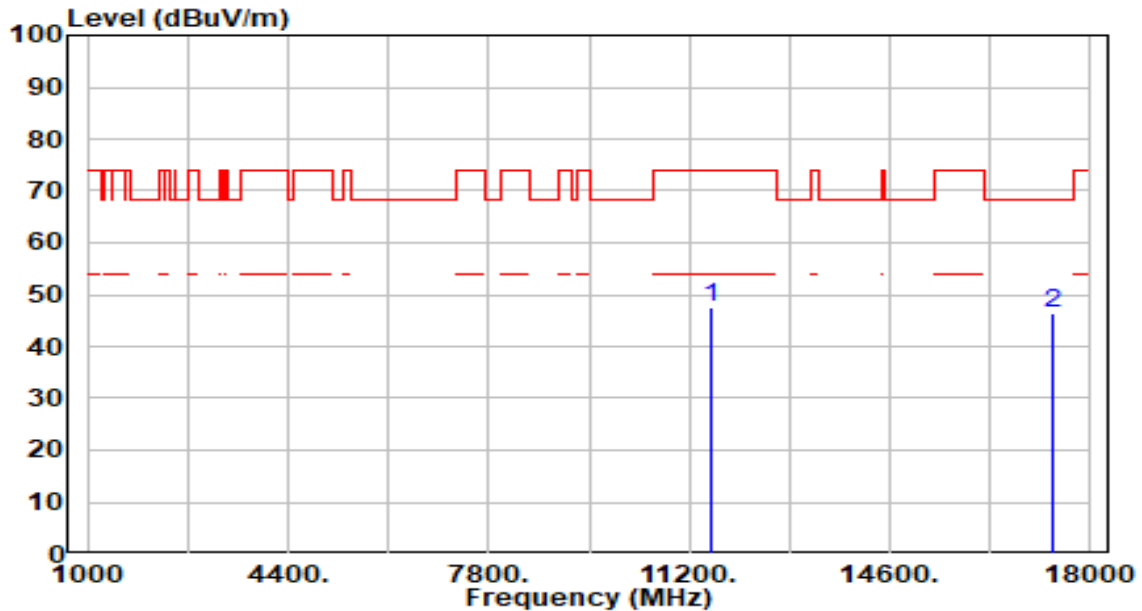


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	42.21	5.35	47.56	-26.44	74.00	200	305	Peak
2	*	17355.000	41.62	4.99	46.60	-21.60	68.20	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

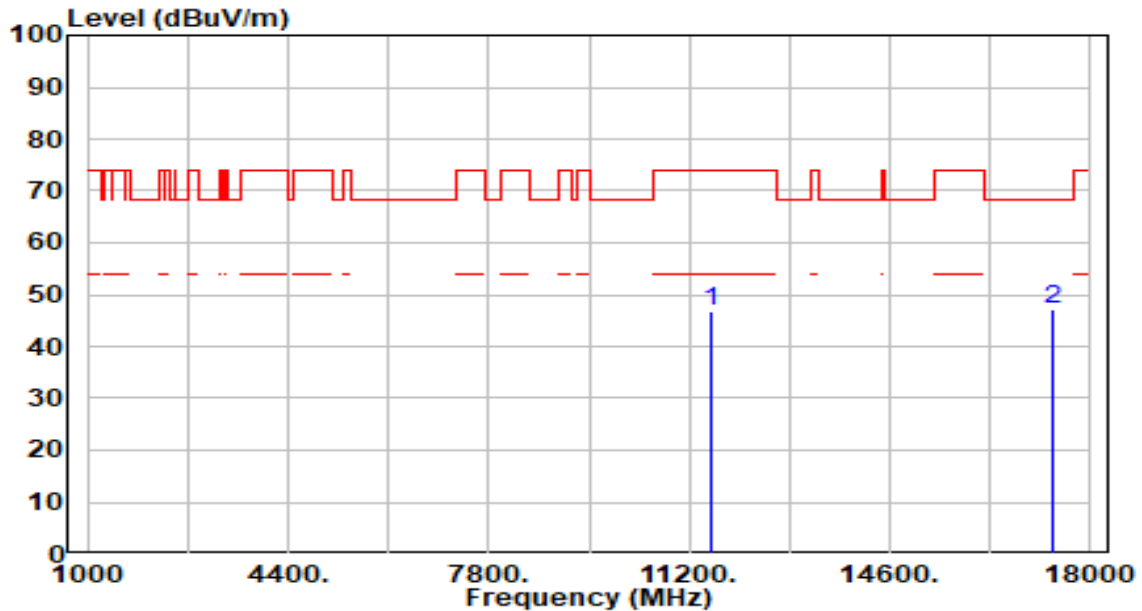


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	41.27	5.35	46.62	-27.38	74.00	200	312	Peak
2	*	17355.000	42.16	4.99	47.14	-21.06	68.20	200	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

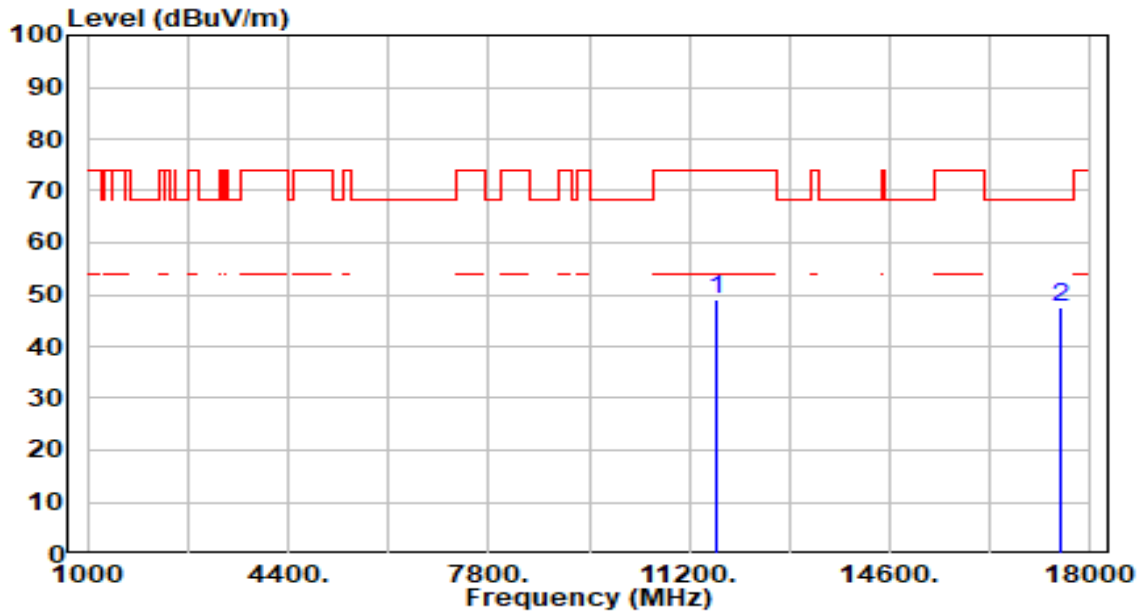


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	43.79	5.37	49.16	-24.84	74.00	200	279	Peak
2	*	17475.000	42.71	5.02	47.73	-20.47	68.20	200	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

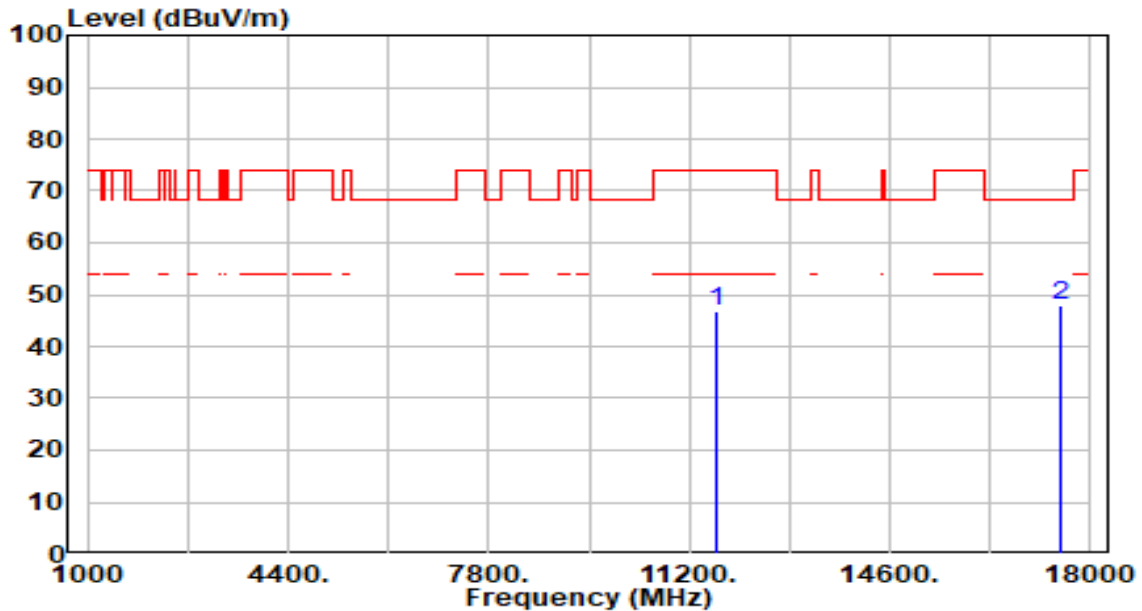


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.49	5.37	46.86	-27.14	74.00	200	66	Peak
2	*	17475.000	42.99	5.02	48.01	-20.19	68.20	200	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

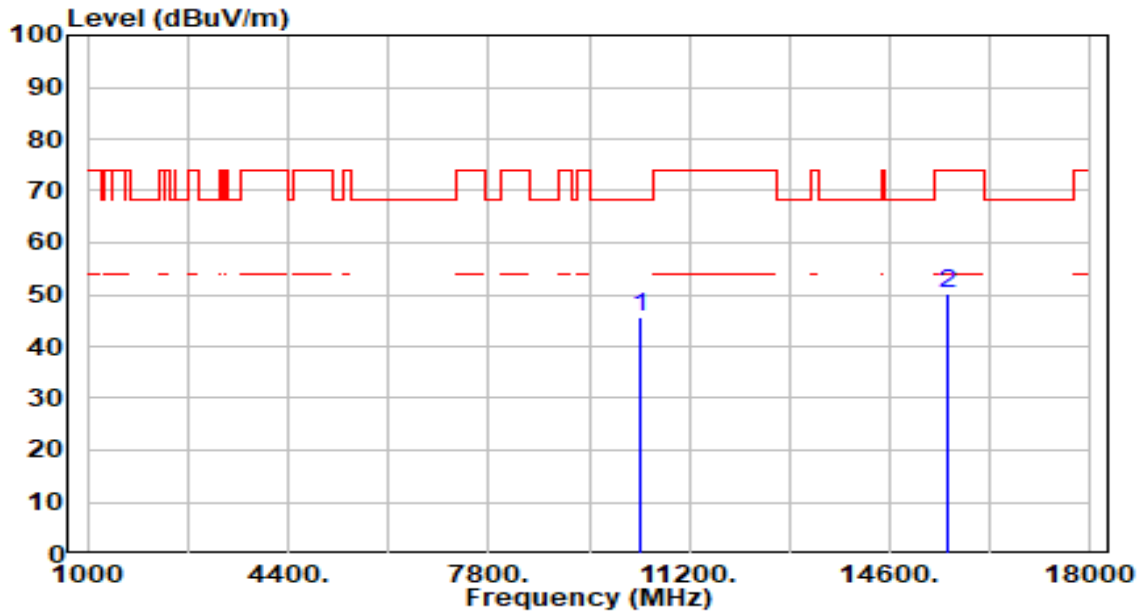


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	40.75	4.79	45.55	-22.65	68.20	200	128	Peak
2		15570.000	43.84	6.24	50.08	-23.92	74.00	200	117	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

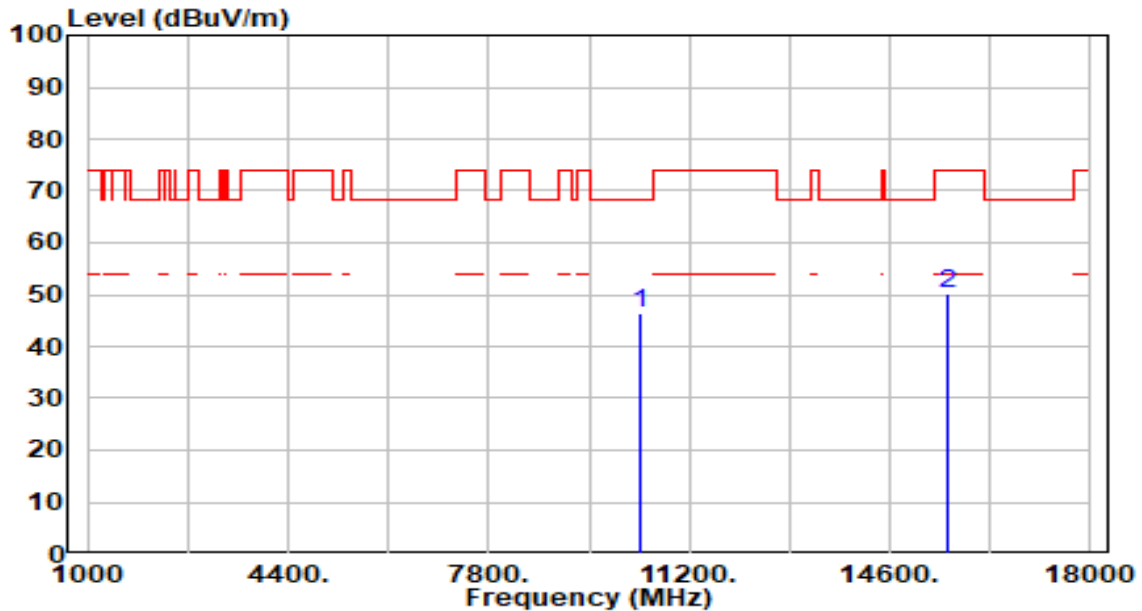


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.61	4.79	46.41	-21.79	68.20	200	69	Peak
2		15570.000	43.96	6.24	50.20	-23.80	74.00	200	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

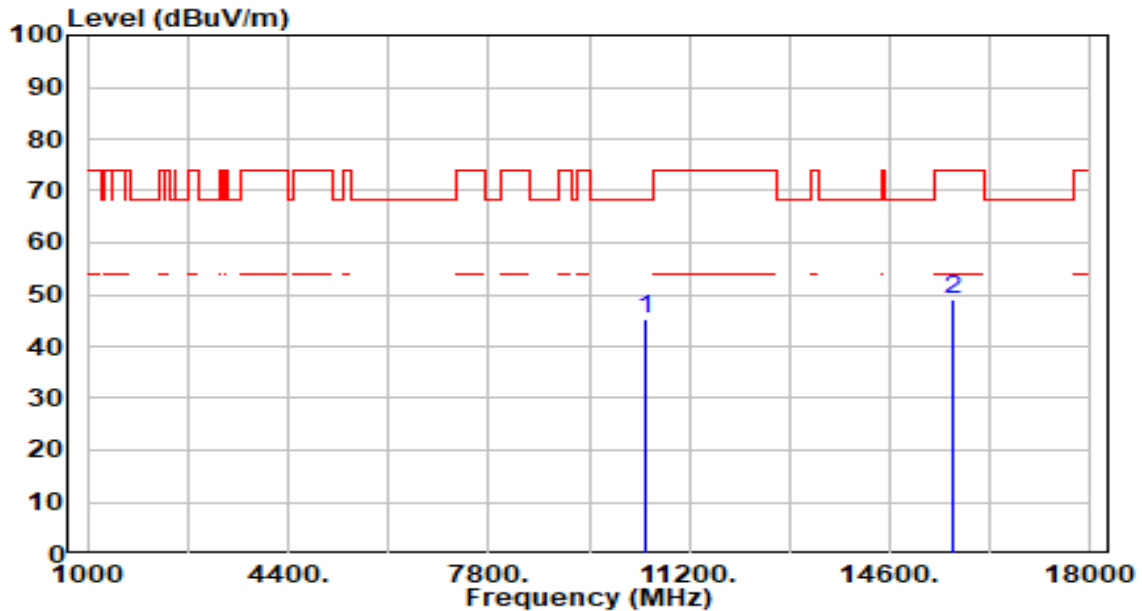


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	40.69	4.68	45.38	-22.82	68.20	200	117	Peak
2		15690.000	42.73	6.37	49.10	-24.90	74.00	200	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

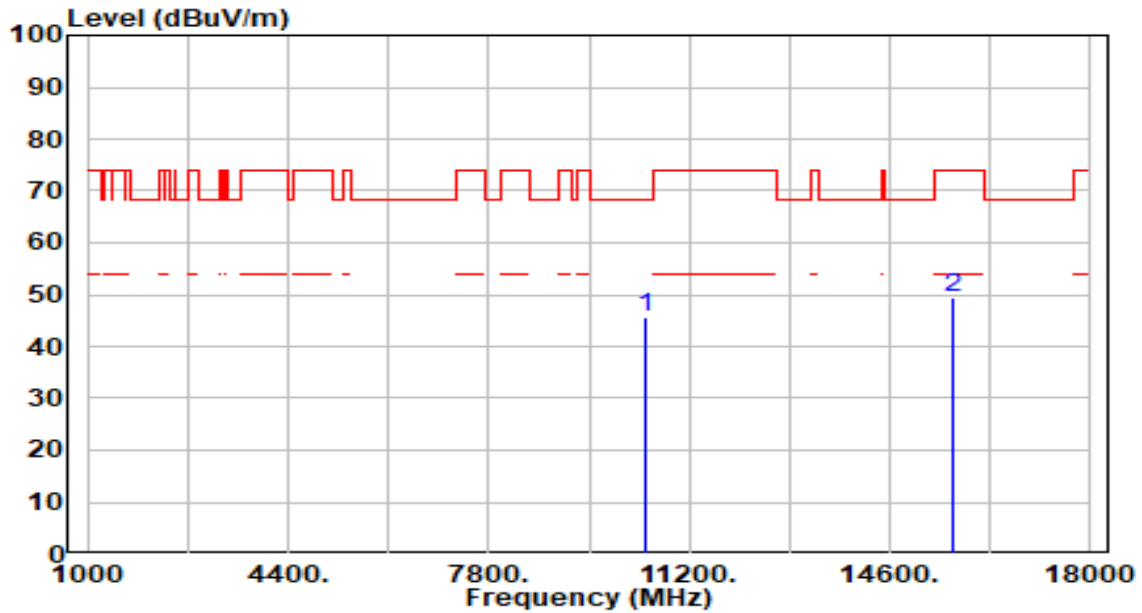


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	41.05	4.68	45.73	-22.47	68.20	200	69	Peak
2		15690.000	43.21	6.37	49.58	-24.42	74.00	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

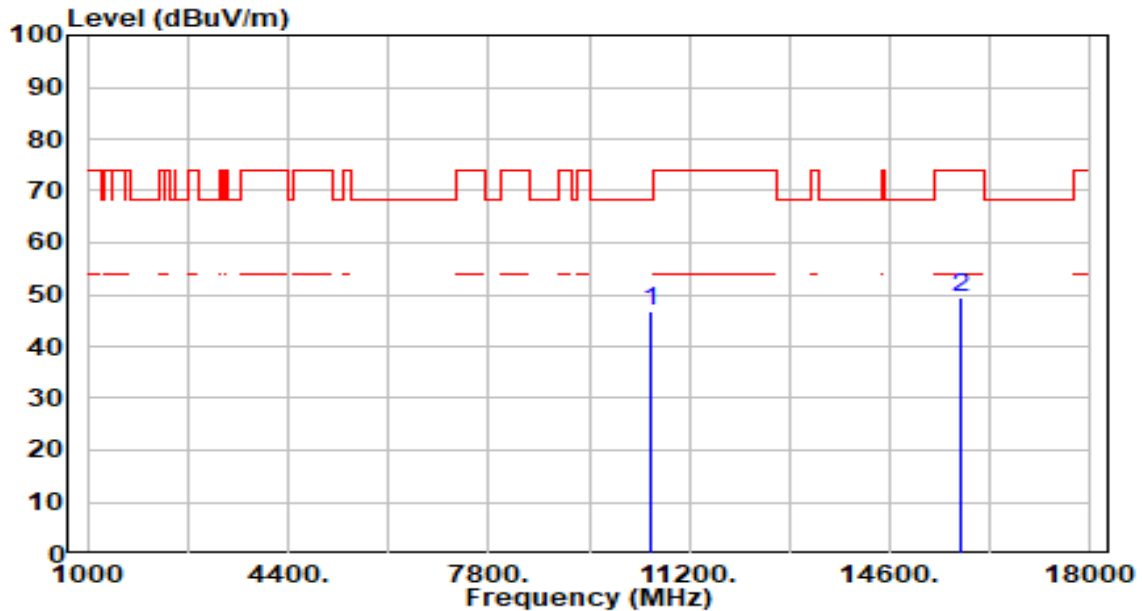


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	42.16	4.59	46.75	-21.45	68.20	200	217	Peak
2		15810.000	43.02	6.60	49.62	-24.38	74.00	200	234	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

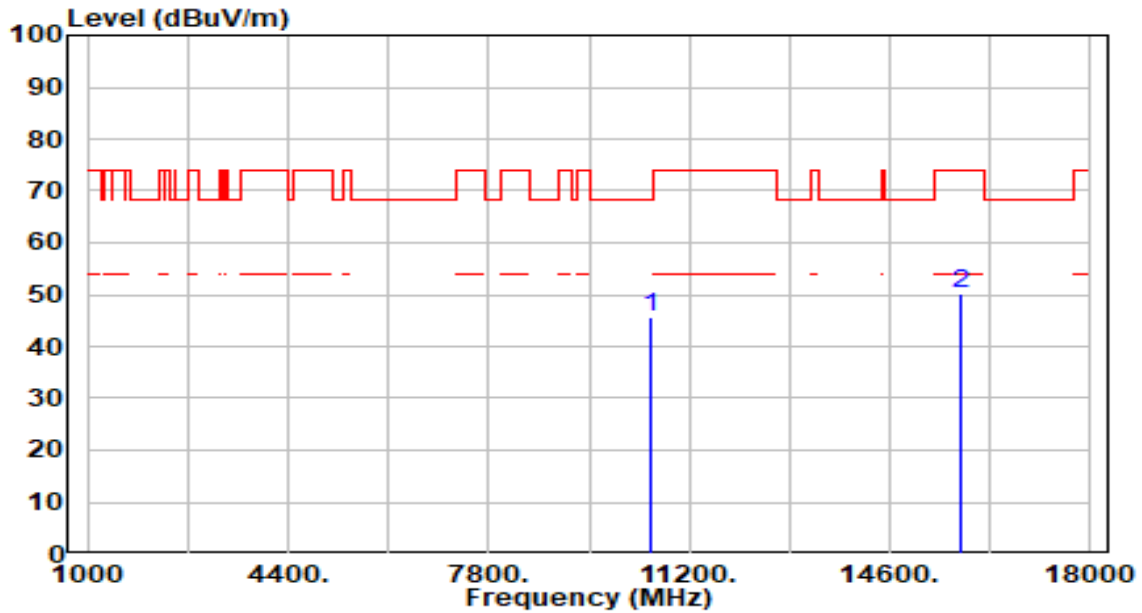


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.01	4.59	45.60	-22.60	68.20	200	69	Peak
2		15810.000	43.47	6.60	50.07	-23.93	74.00	200	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

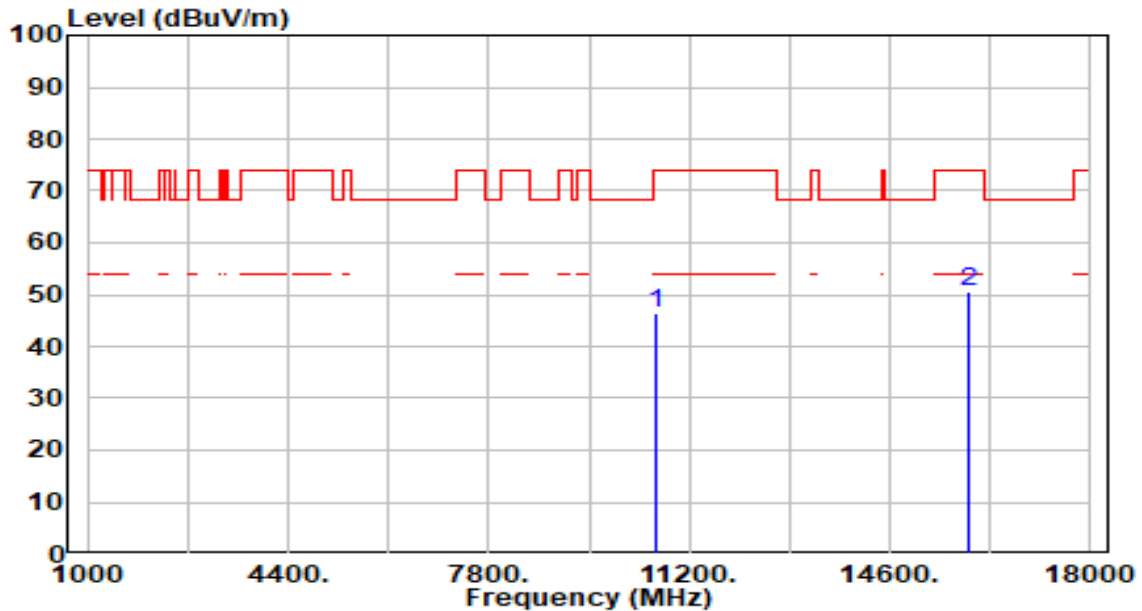


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.78	4.56	46.34	-27.66	74.00	200	15	Peak
2	* 15930.000	44.07	6.66	50.73	-23.27	74.00	200	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

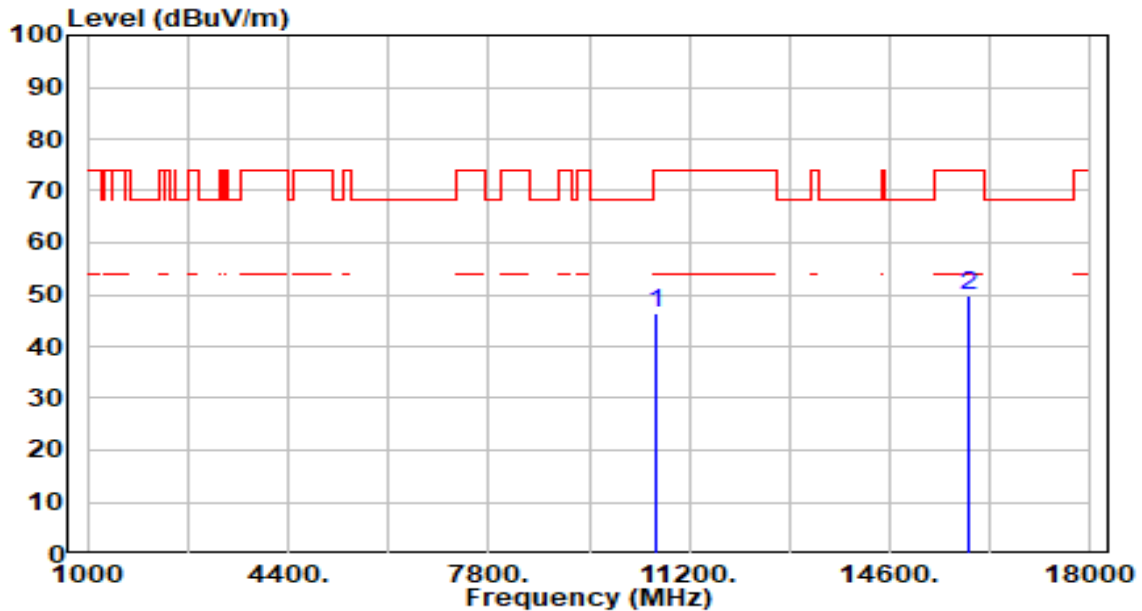


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.96	4.56	46.52	-27.48	74.00	200	47	Peak
2	* 15930.000	43.25	6.66	49.91	-24.09	74.00	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

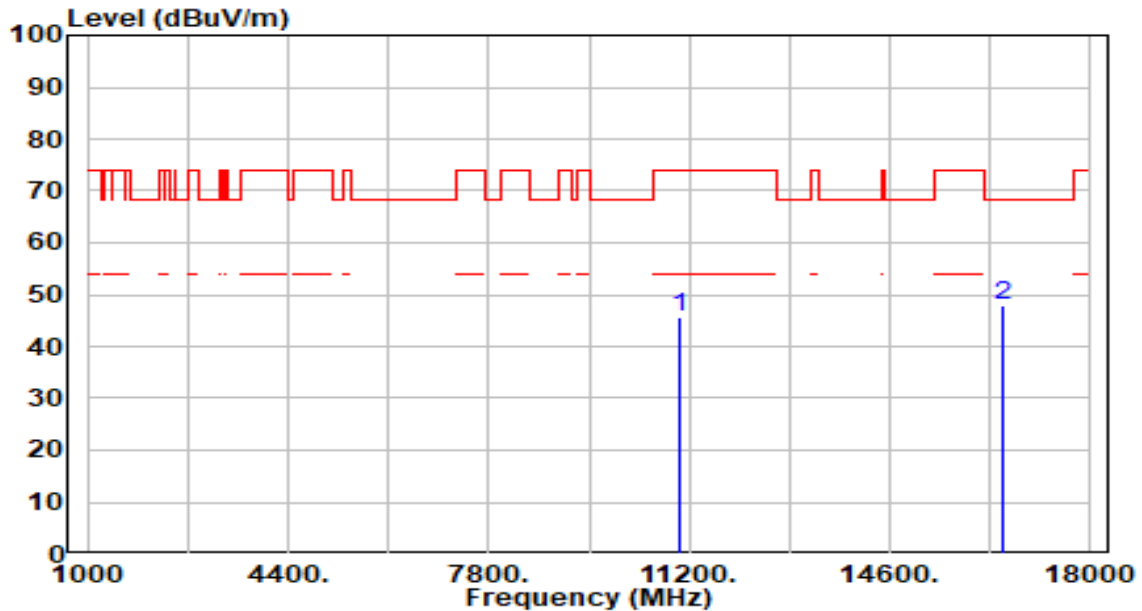


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	41.28	4.49	45.77	-28.23	74.00	200	154	Peak
2	*	16530.000	41.83	6.05	47.88	-20.32	68.20	200	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

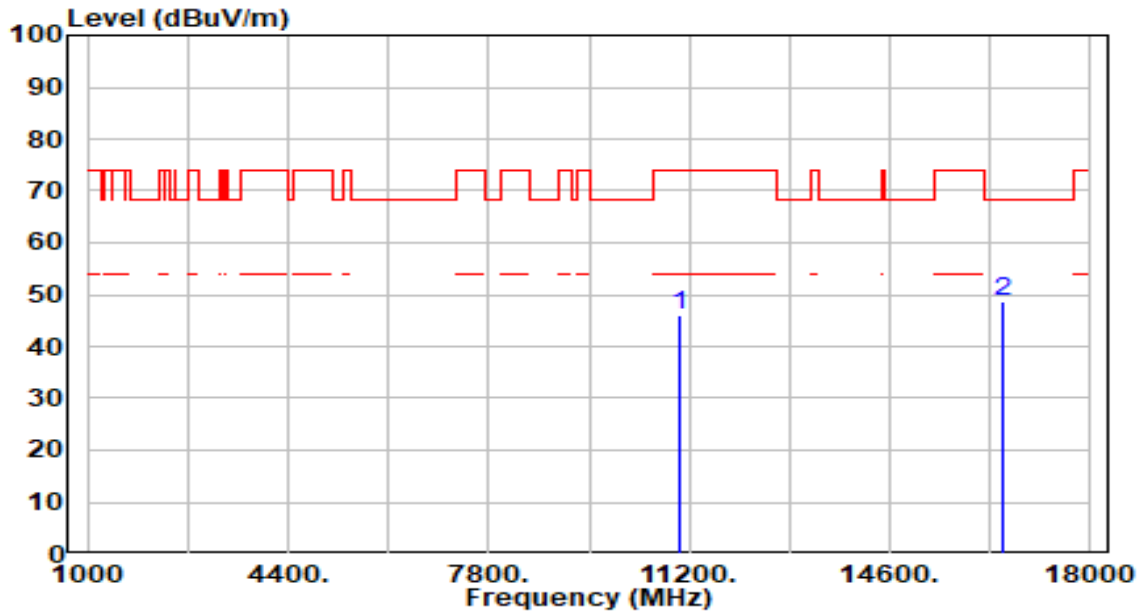


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.64	4.49	46.13	-27.87	74.00	200	47	Peak
2	* 16530.000	42.67	6.05	48.72	-19.48	68.20	200	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

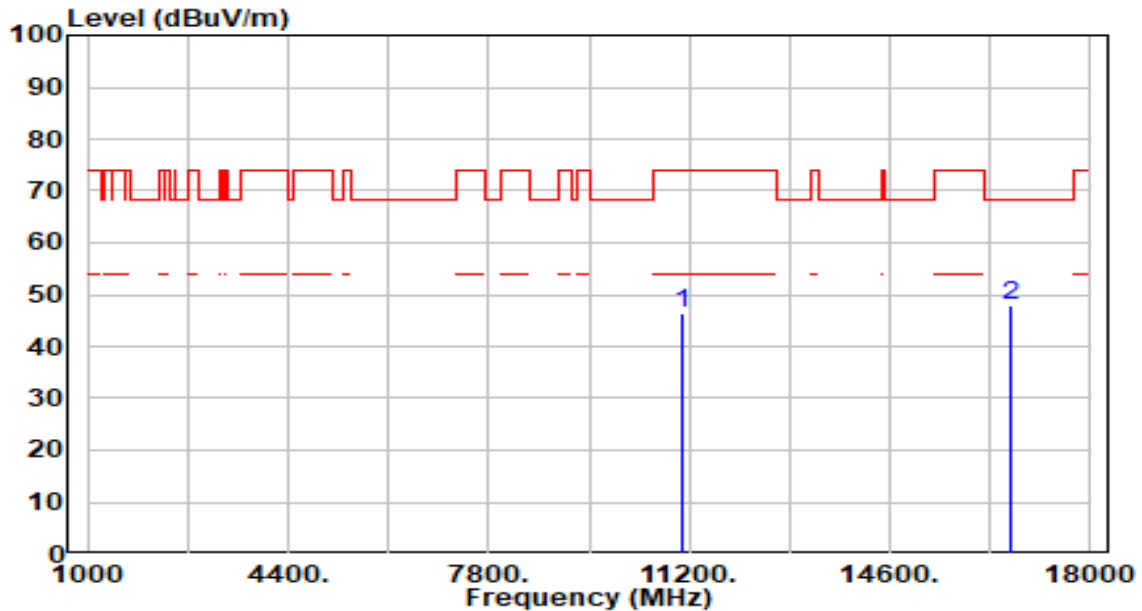


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.63	4.71	46.34	-27.66	74.00	200	47	Peak
2	*	16650.000	41.81	6.00	47.81	-20.39	68.20	200	47	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

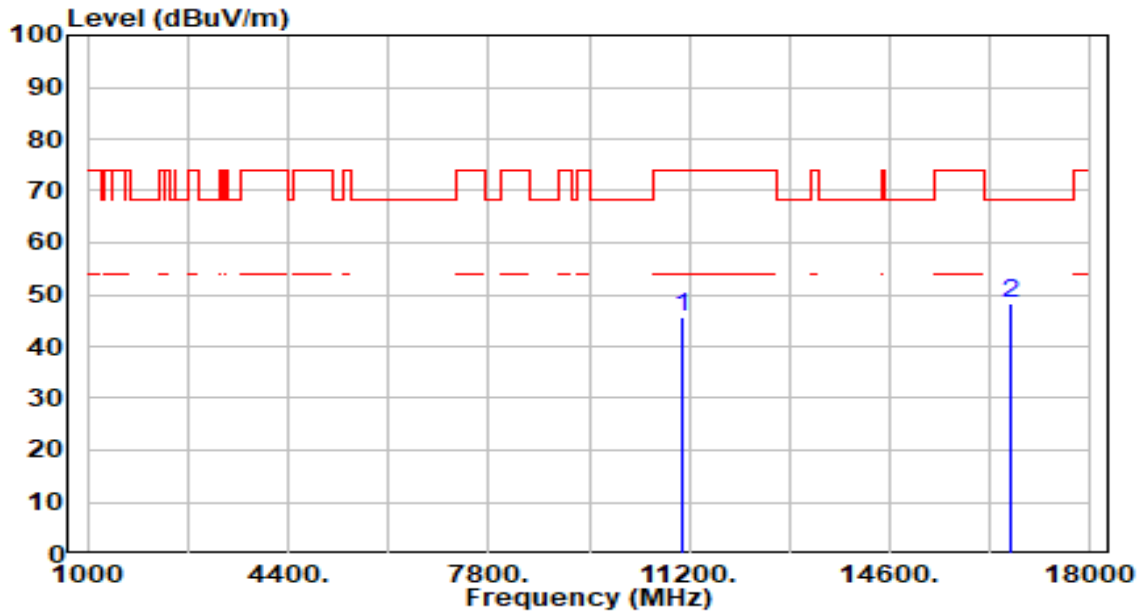


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.11	4.71	45.82	-28.18	74.00	200	0	Peak
2	*	16650.000	42.13	6.00	48.13	-20.07	68.20	200	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

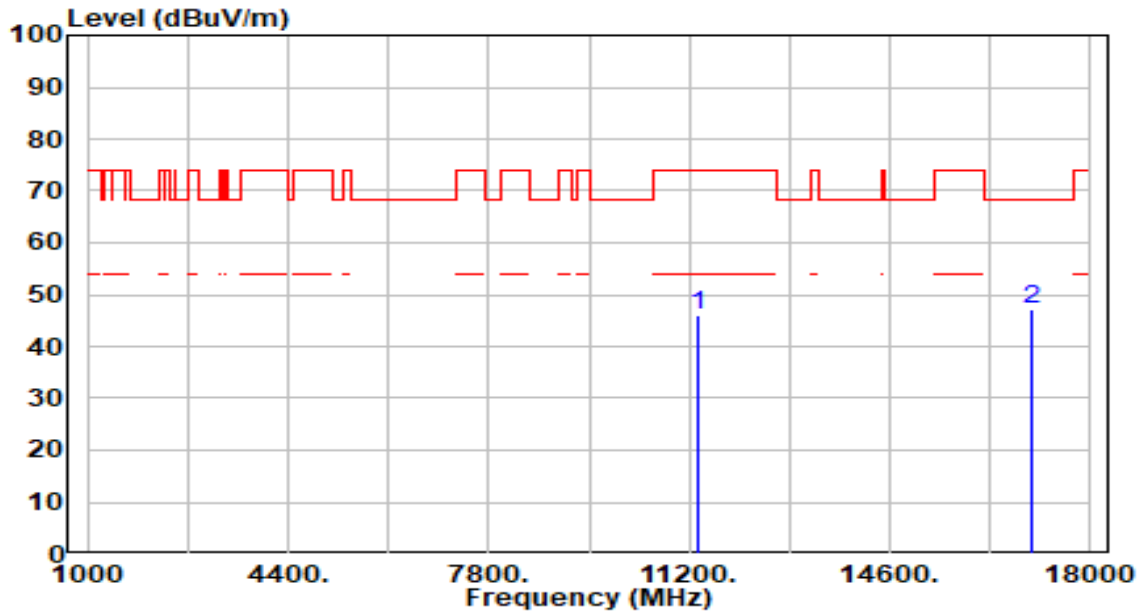


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	40.78	5.14	45.92	-28.08	74.00	200	247	Peak
2	*	17010.000	41.38	5.74	47.12	-21.08	68.20	200	283	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

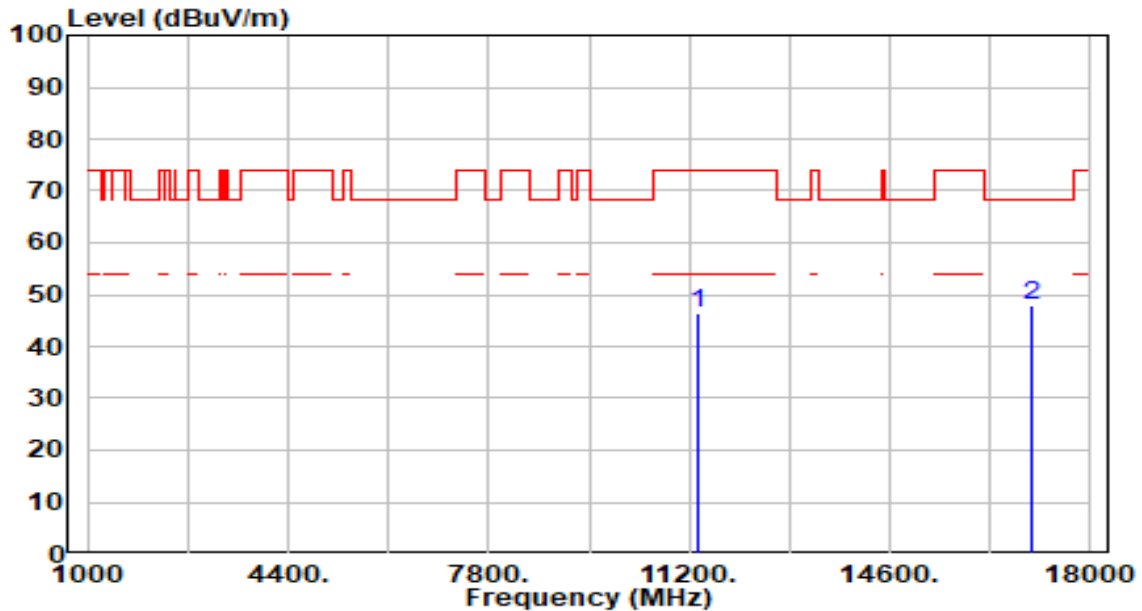


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.13	5.14	46.28	-27.72	74.00	200	72	Peak
2	* 17010.000	42.36	5.74	48.10	-20.10	68.20	200	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

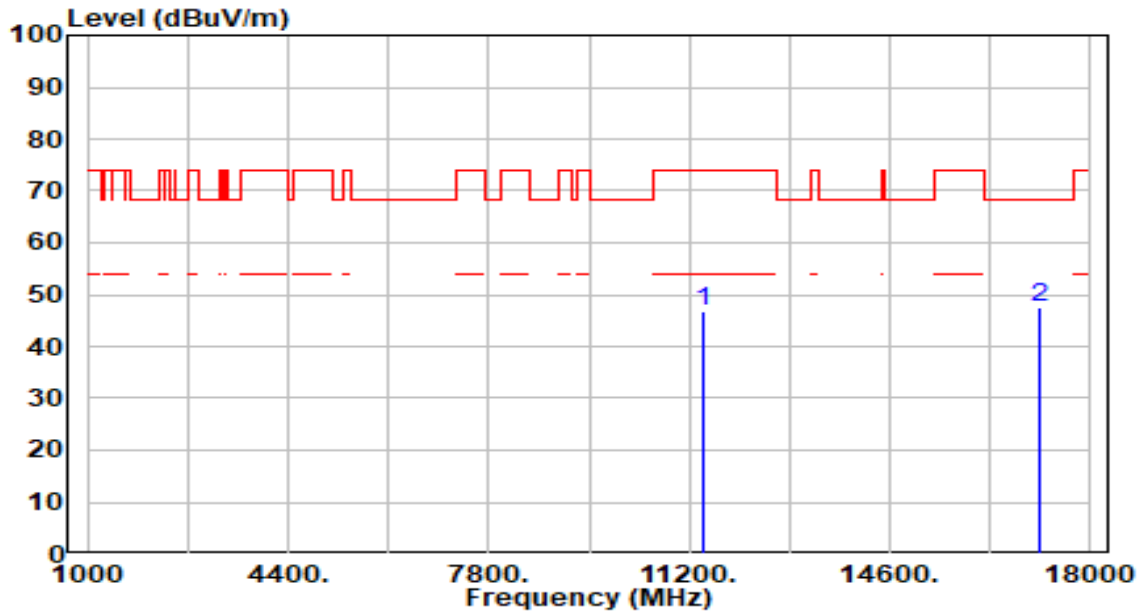


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.41	5.23	46.64	-27.36	74.00	200	111	Peak
2	*	17130.000	42.11	5.48	47.59	-20.61	68.20	200	294	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

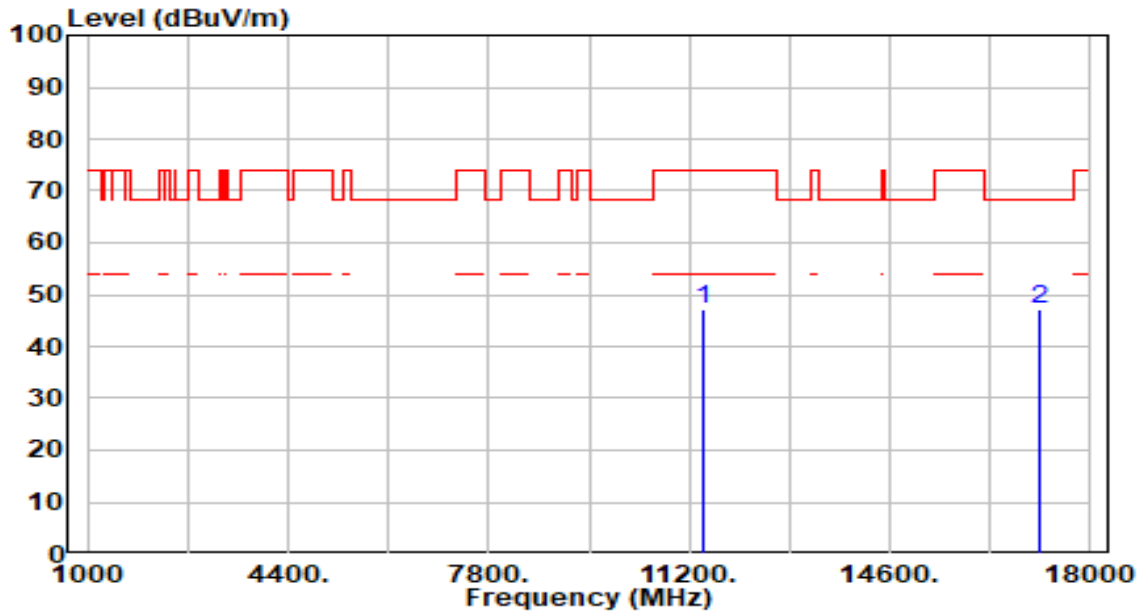


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.89	5.23	47.12	-26.88	74.00	200	117	Peak
2	*	17130.000	41.79	5.48	47.26	-20.94	68.20	200	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

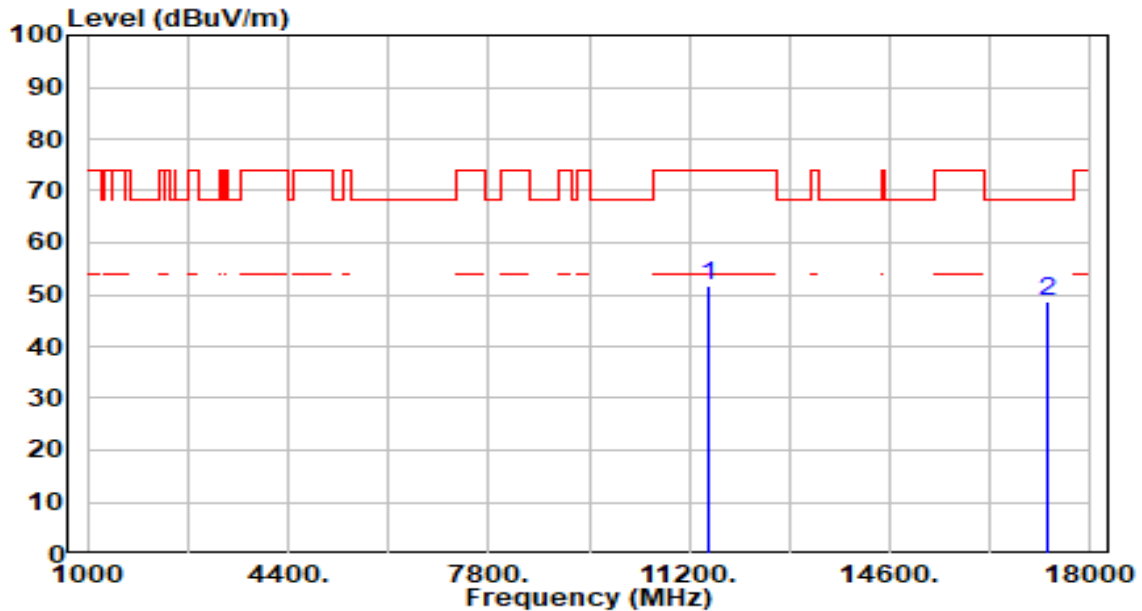


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	46.33	5.29	51.62	-22.38	74.00	200	288	Peak
2	*	17265.000	43.44	5.18	48.62	-19.58	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

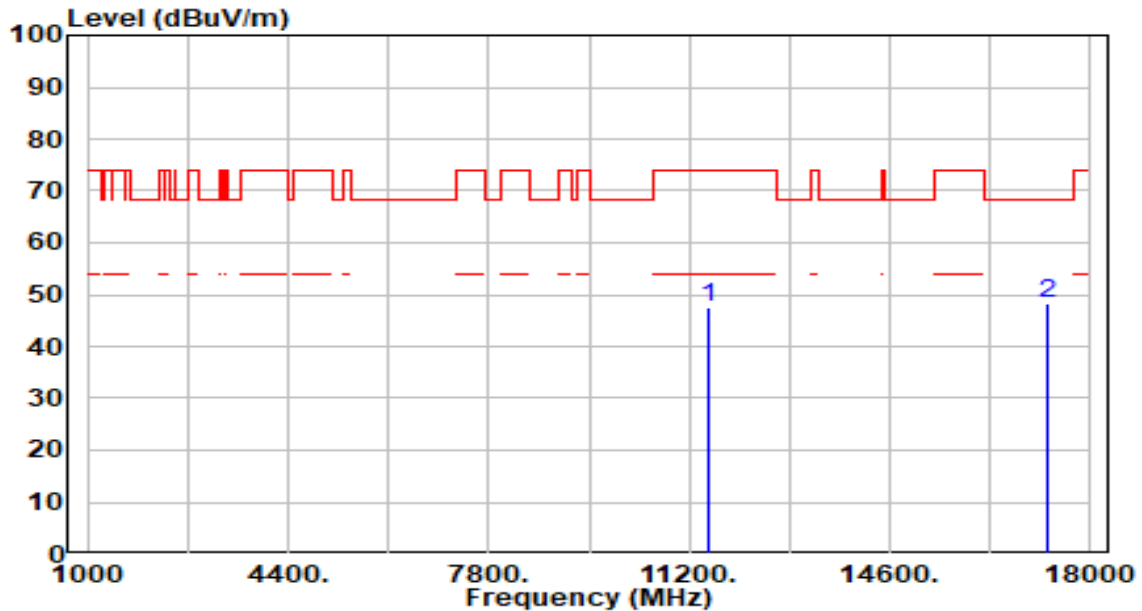


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	42.21	5.29	47.51	-26.49	74.00	200	291	Peak
2	*	17265.000	43.06	5.18	48.25	-19.95	68.20	200	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

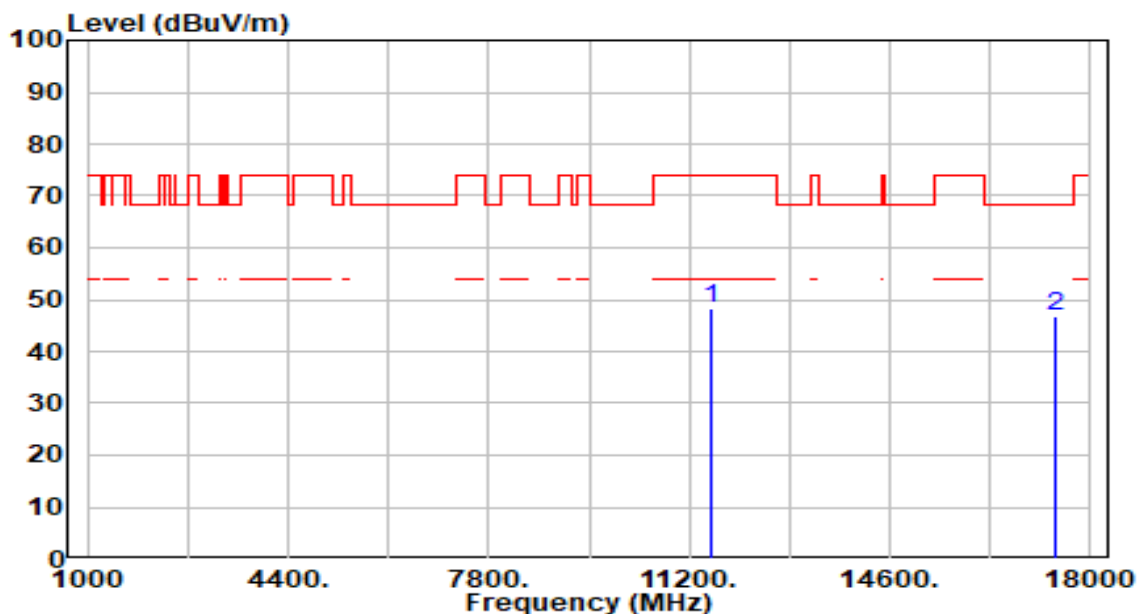


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	43.02	5.37	48.38	-25.62	74.00	200	278	Peak
2	*	17385.000	42.00	4.92	46.93	-21.27	68.20	200	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

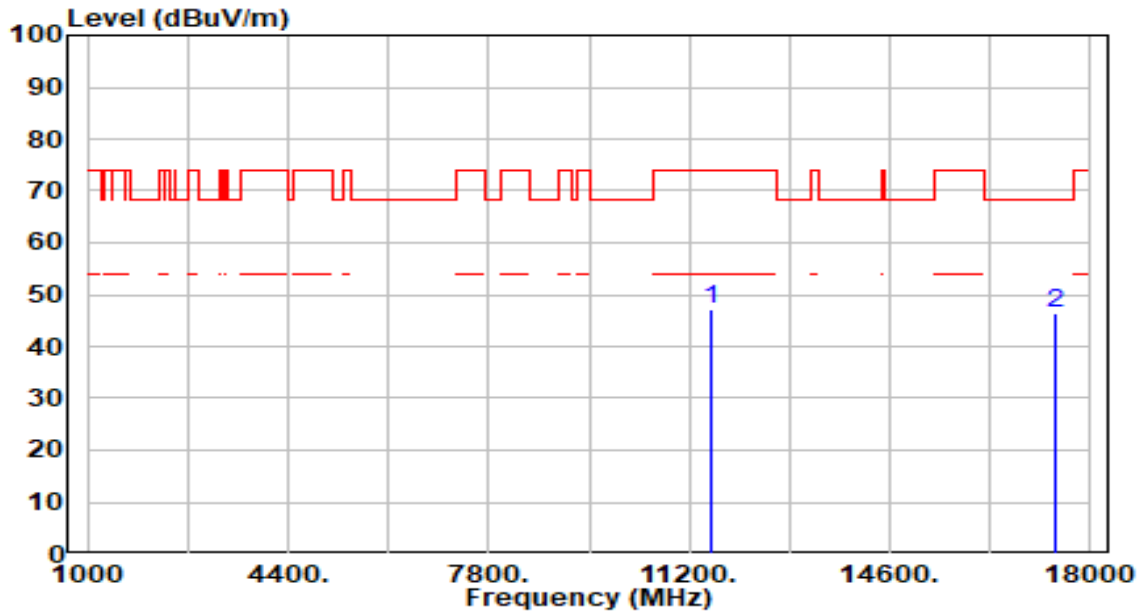


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	41.81	5.37	47.17	-26.83	74.00	200	331	Peak
2	*	17385.000	41.59	4.92	46.51	-21.69	68.20	200	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

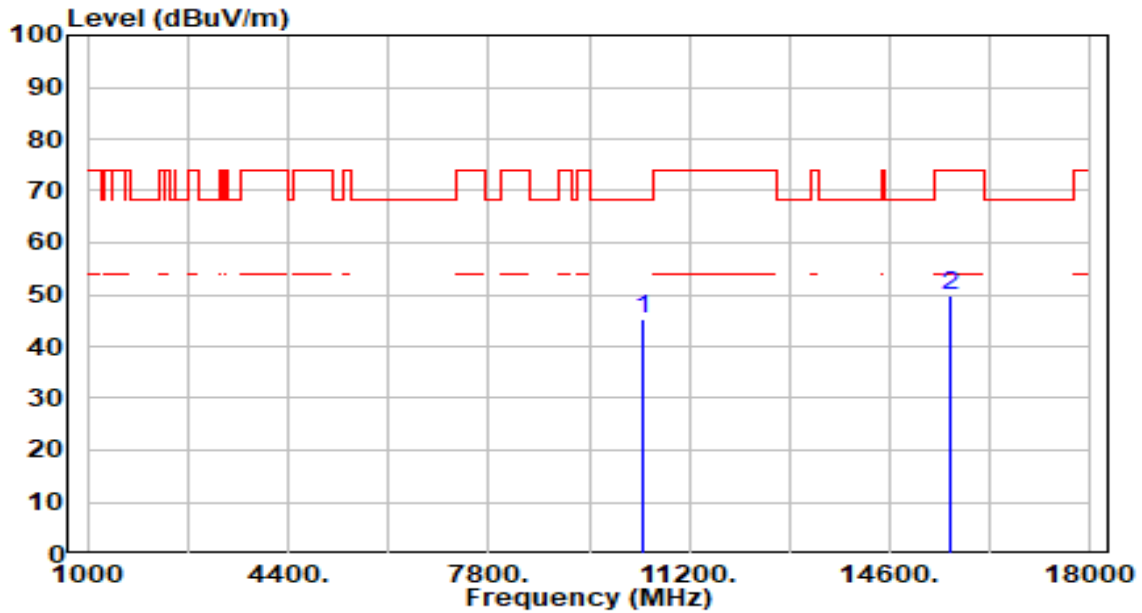


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.72	4.74	45.46	-22.74	68.20	200	200	Peak
2		15630.000	43.69	6.25	49.95	-24.05	74.00	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

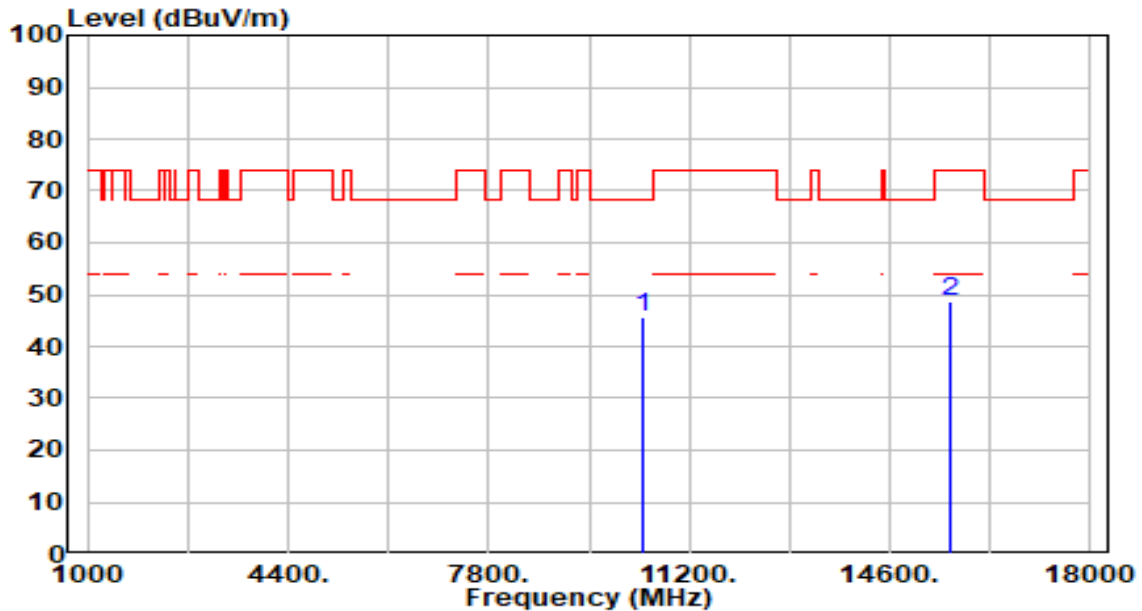


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.93	4.74	45.67	-22.53	68.20	200	155	Peak
2		15630.000	42.40	6.25	48.66	-25.34	74.00	200	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

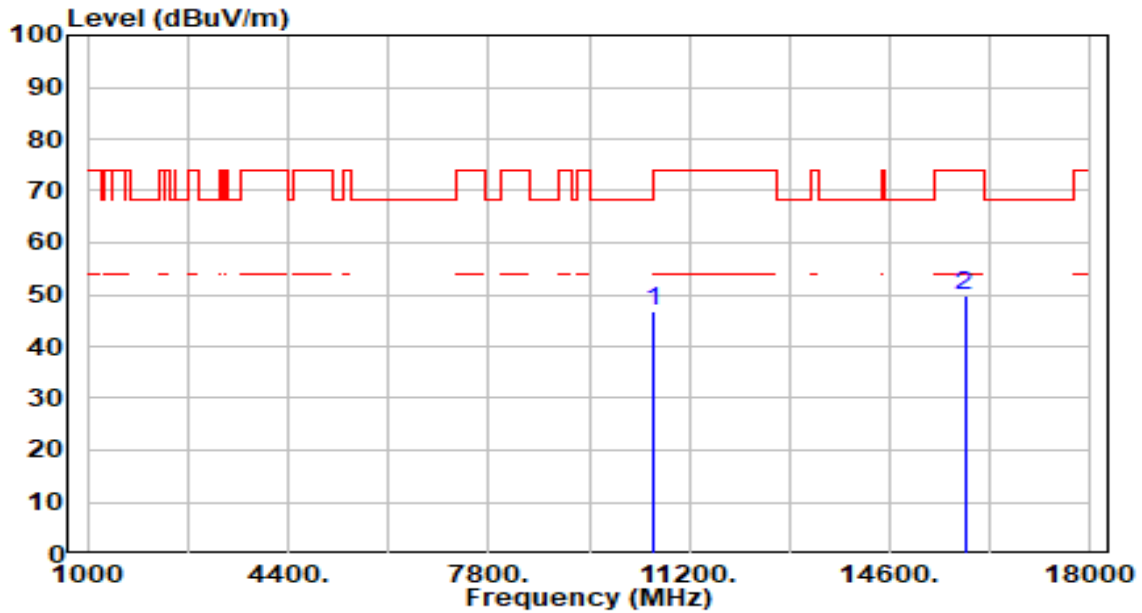


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	42.29	4.56	46.85	-21.35	68.20	200	194	Peak
2		15870.000	43.25	6.63	49.87	-24.13	74.00	200	69	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

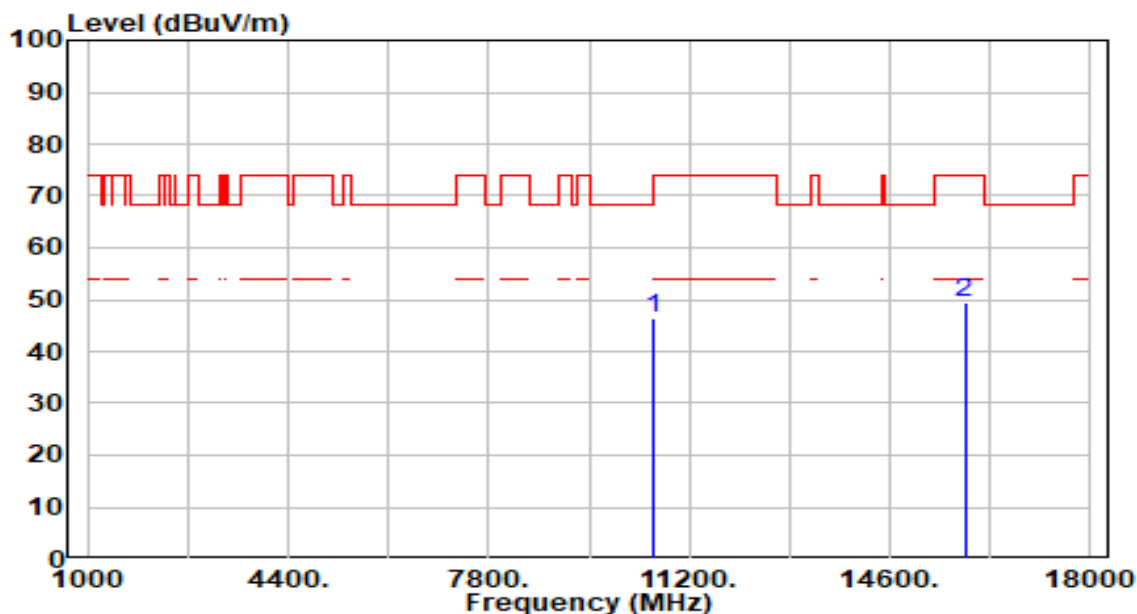


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.80	4.56	46.36	-21.84	68.20	200	156	Peak
2		15870.000	42.92	6.63	49.55	-24.45	74.00	200	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

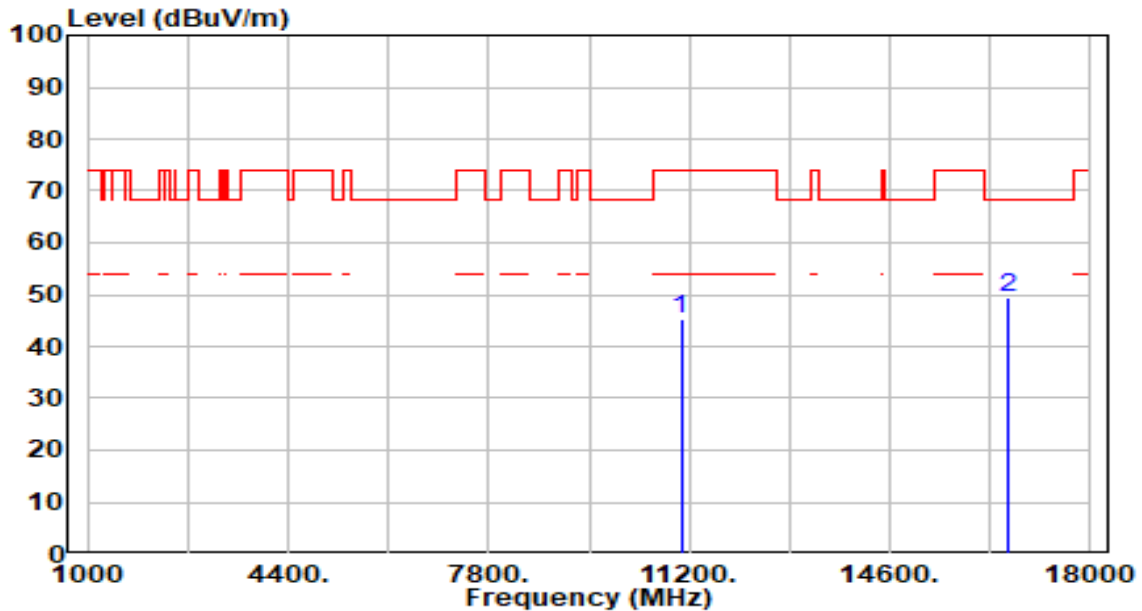


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	40.82	4.60	45.43	-28.57	74.00	200	44	Peak
2	*	16590.000	43.61	6.00	49.61	-18.59	68.20	200	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

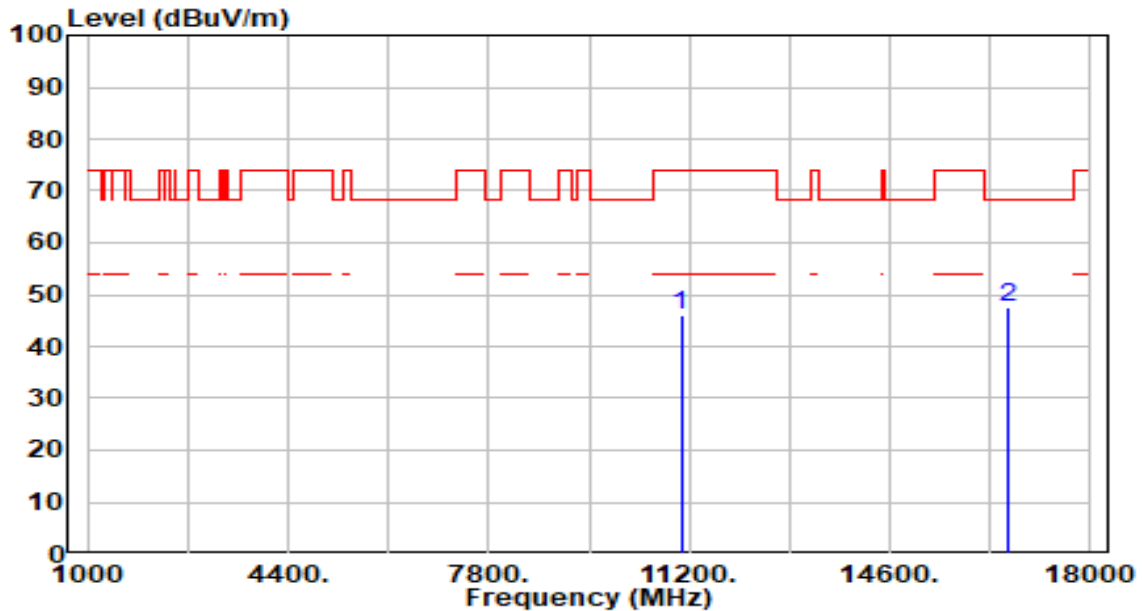


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	41.32	4.60	45.92	-28.08	74.00	200	321	Peak
2	*	16590.000	41.65	6.00	47.65	-20.55	68.20	200	123	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

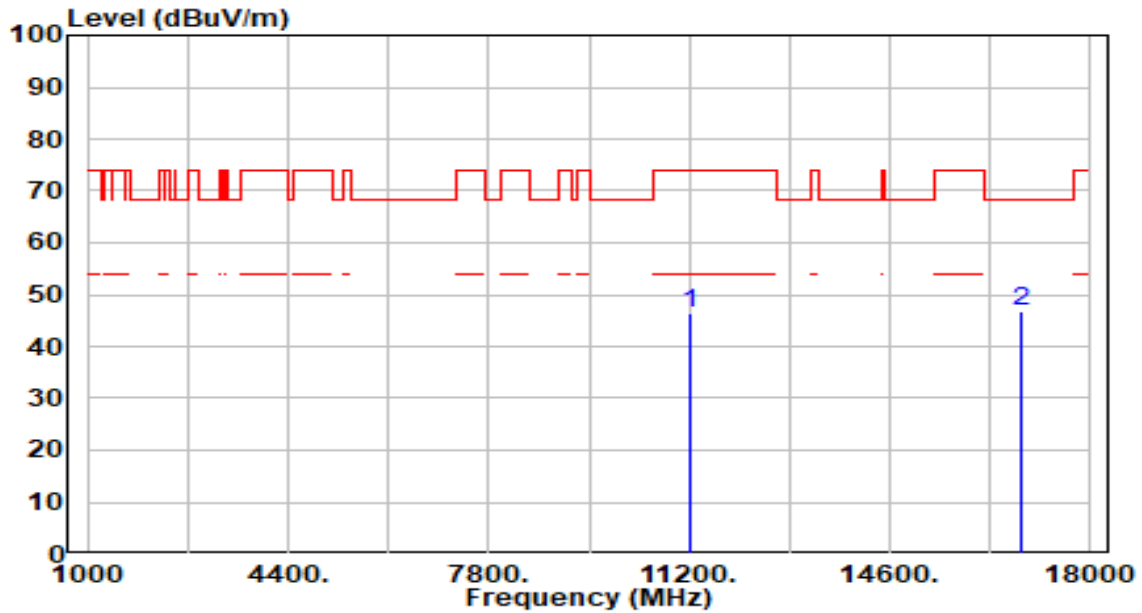


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	41.55	5.00	46.55	-27.45	74.00	200	47	Peak
2	*	16830.000	40.85	5.98	46.84	-21.36	68.20	200	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

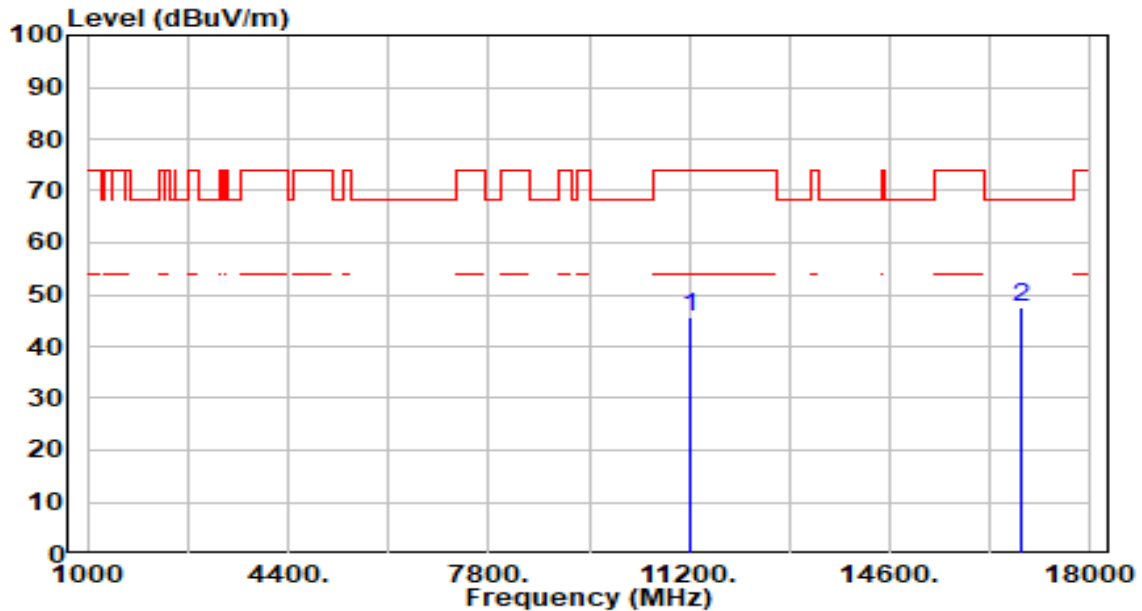


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	40.65	5.00	45.65	-28.35	74.00	200	0	Peak
2	*	16830.000	41.47	5.98	47.45	-20.75	68.20	200	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

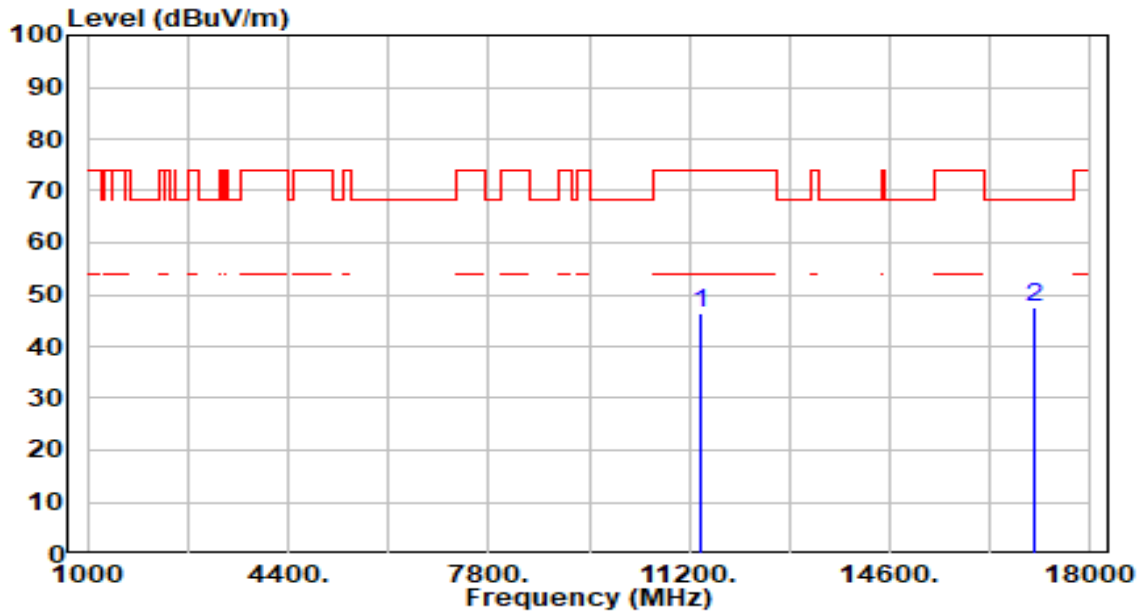


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.29	5.19	46.48	-27.52	74.00	200	154	Peak
2	*	17070.000	42.04	5.61	47.65	-20.55	68.20	200	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

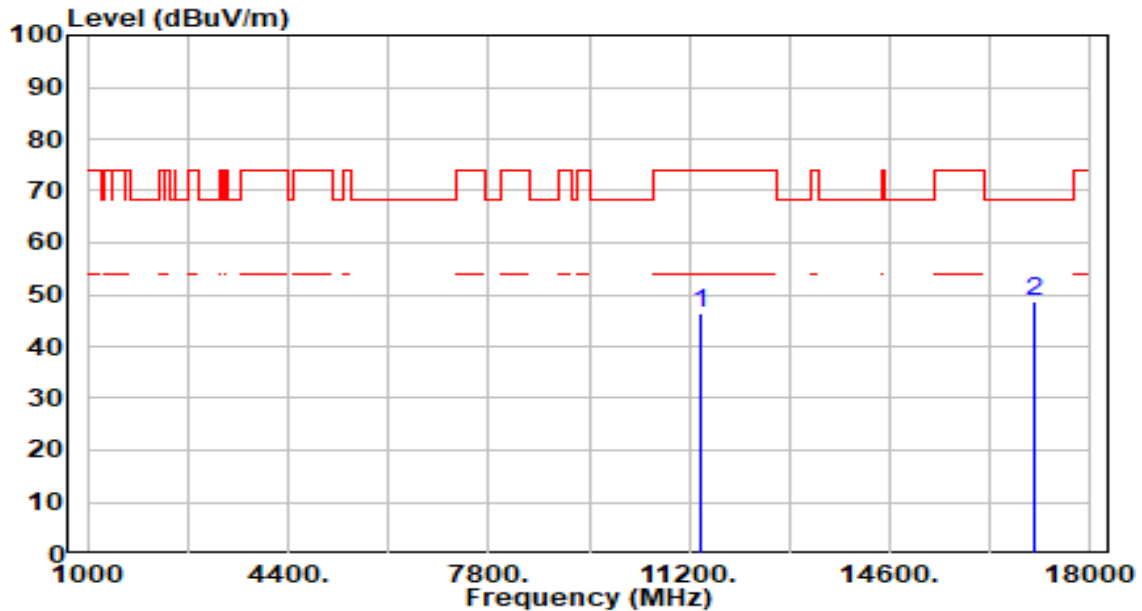


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.28	5.19	46.47	-27.53	74.00	200	164	Peak
2	*	17070.000	42.90	5.61	48.51	-19.69	68.20	200	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

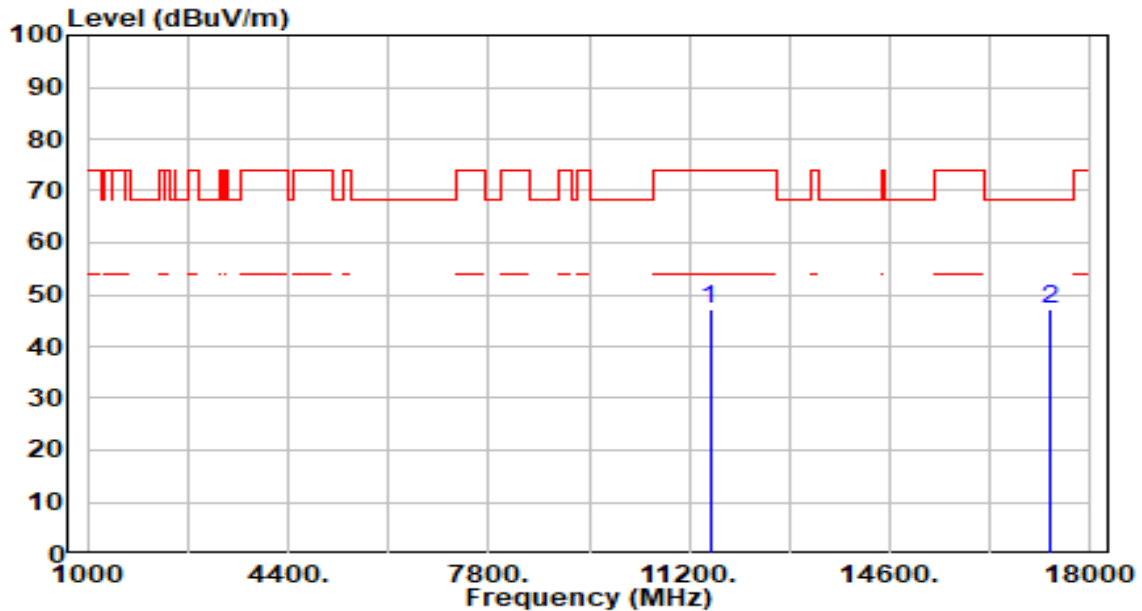


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	41.74	5.33	47.07	-26.93	74.00	200	237	Peak
2	*	17325.000	42.28	5.05	47.33	-20.87	68.20	200	137	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

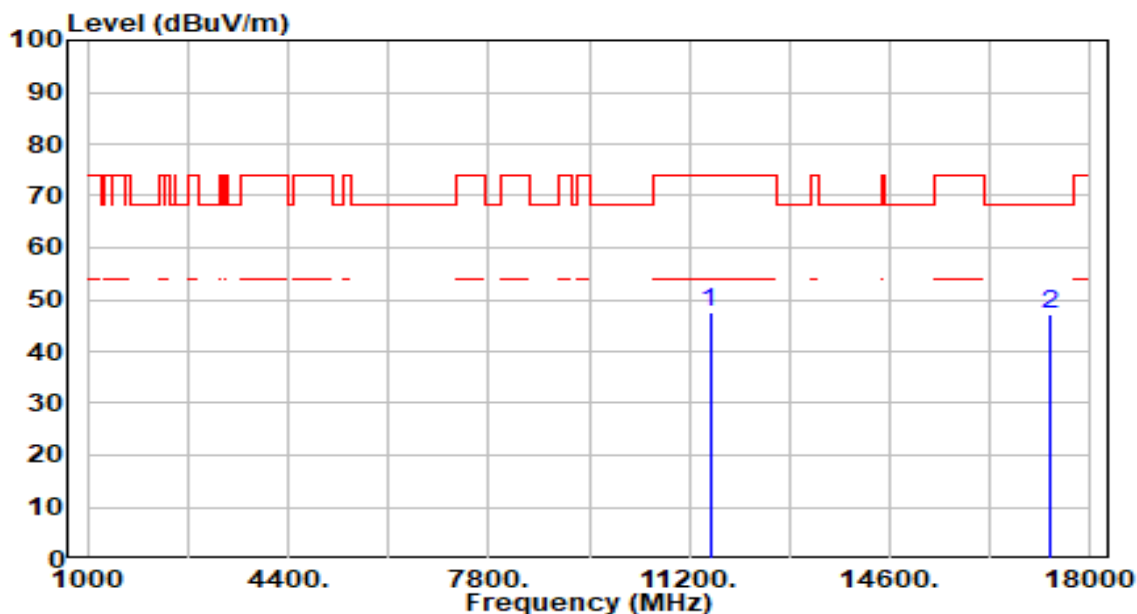


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	42.24	5.33	47.57	-26.43	74.00	200	184	Peak
2	*	17325.000	41.93	5.05	46.99	-21.21	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

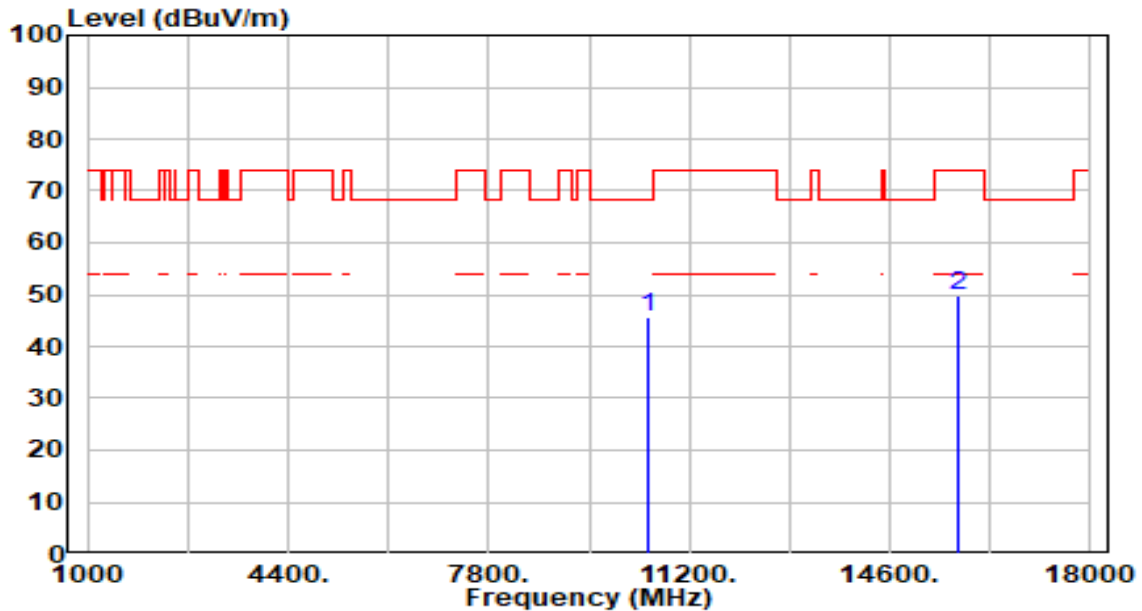


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.14	4.62	45.76	-22.44	68.20	200	210	Peak
2		15750.000	43.32	6.49	49.81	-24.19	74.00	200	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

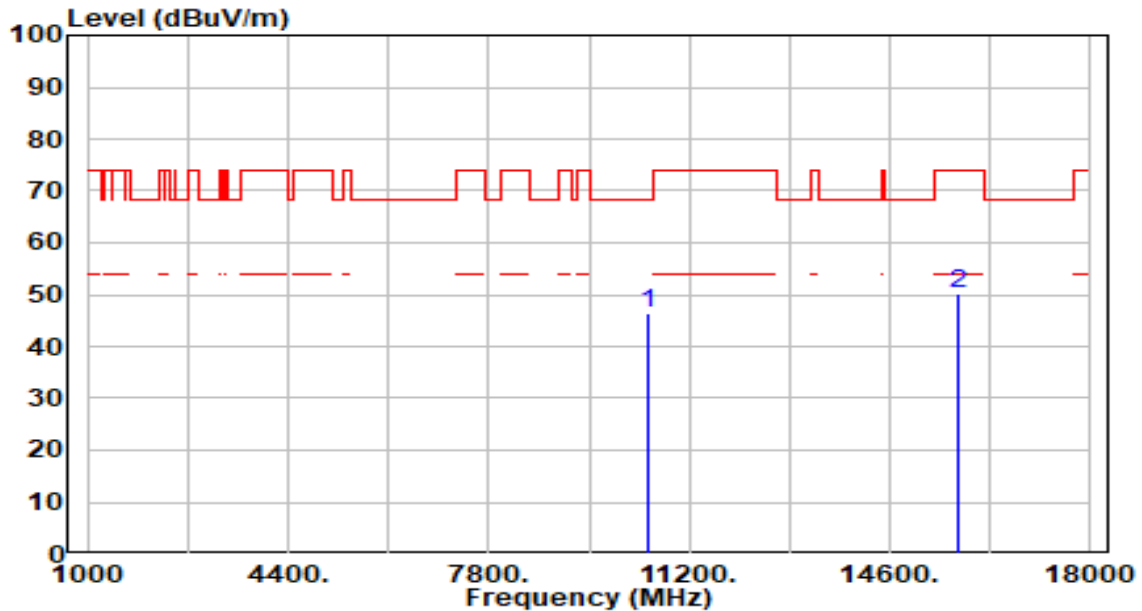


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.69	4.62	46.32	-21.88	68.20	200	247	Peak
2		15750.000	43.62	6.49	50.11	-23.89	74.00	200	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

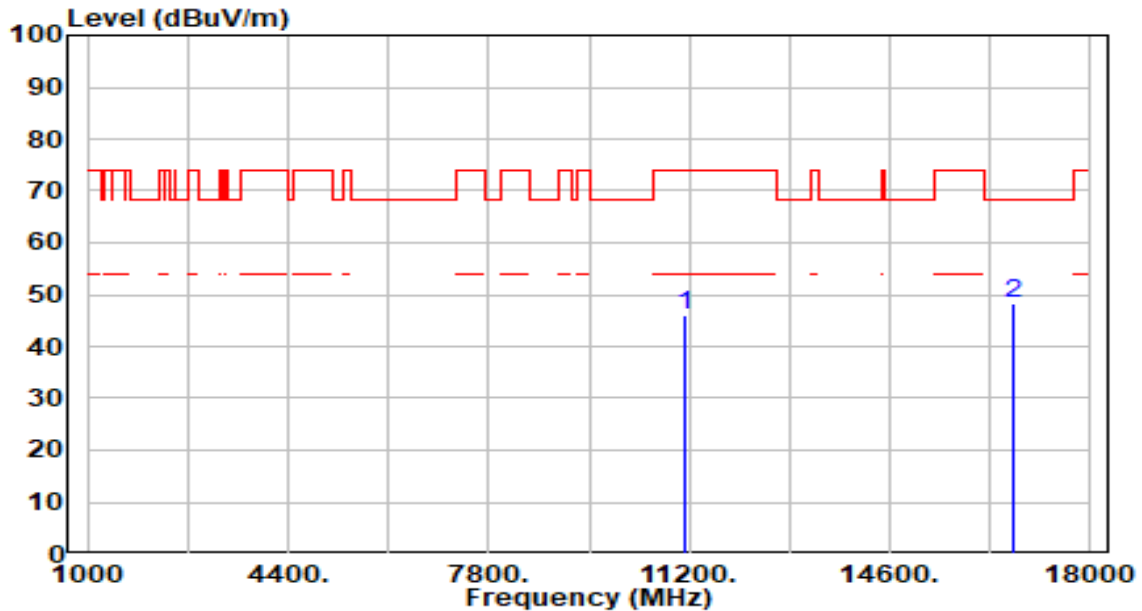


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.28	4.82	46.10	-27.90	74.00	200	77	Peak
2	*	16710.000	42.47	6.01	48.47	-19.73	68.20	200	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

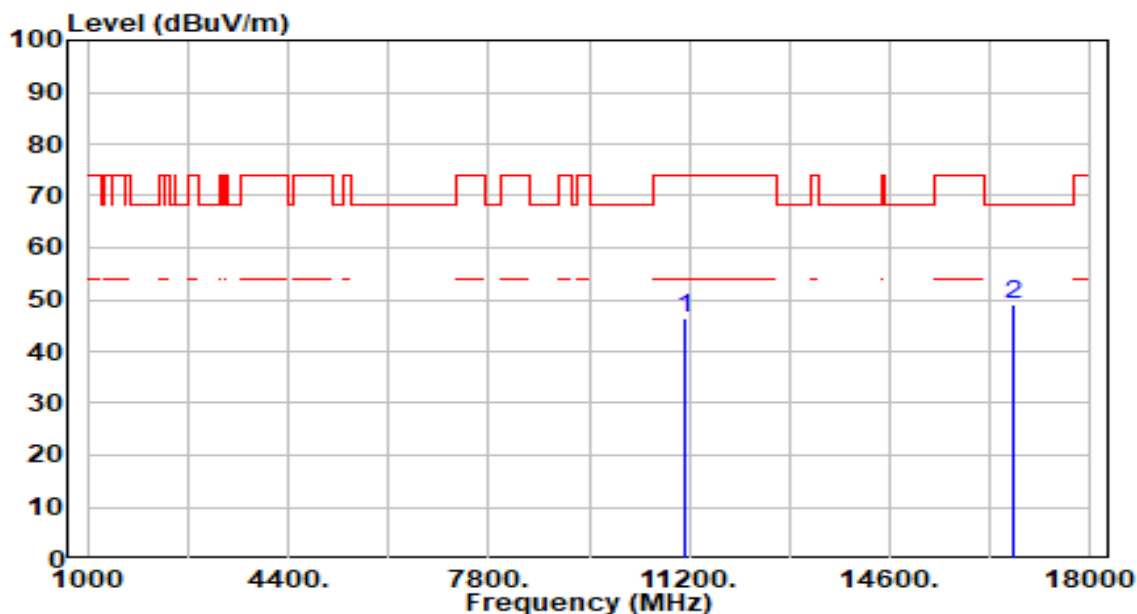


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.54	4.82	46.35	-27.65	74.00	200	345	Peak
2	*	16710.000	43.01	6.01	49.02	-19.18	68.20	200	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

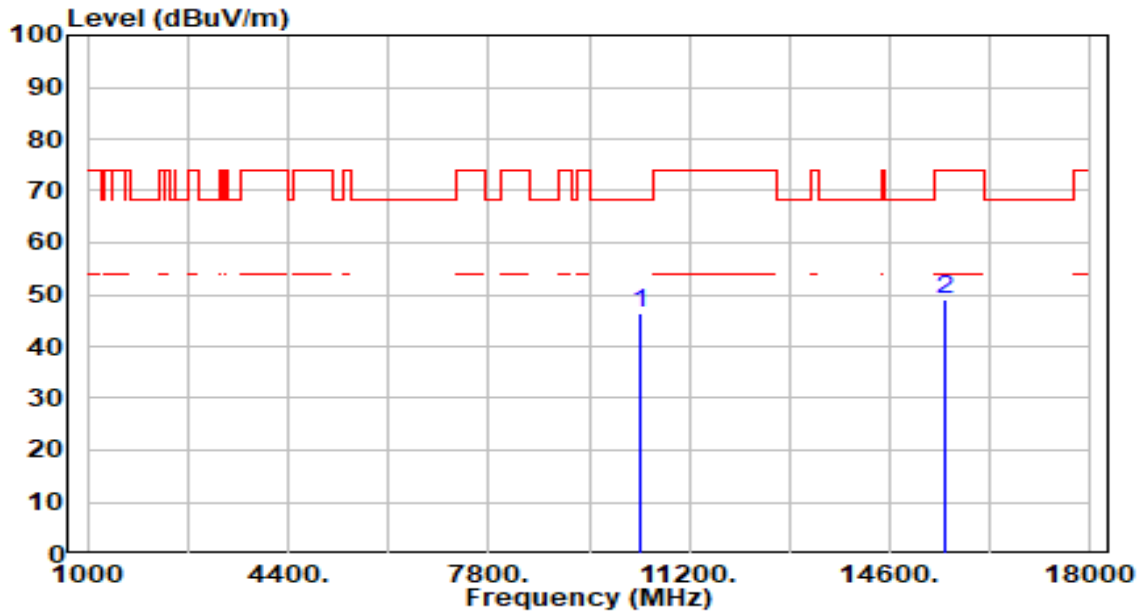


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.67	4.81	46.49	-21.71	68.20	200	91	Peak
2		15540.000	42.70	6.28	48.98	-25.02	74.00	200	191	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

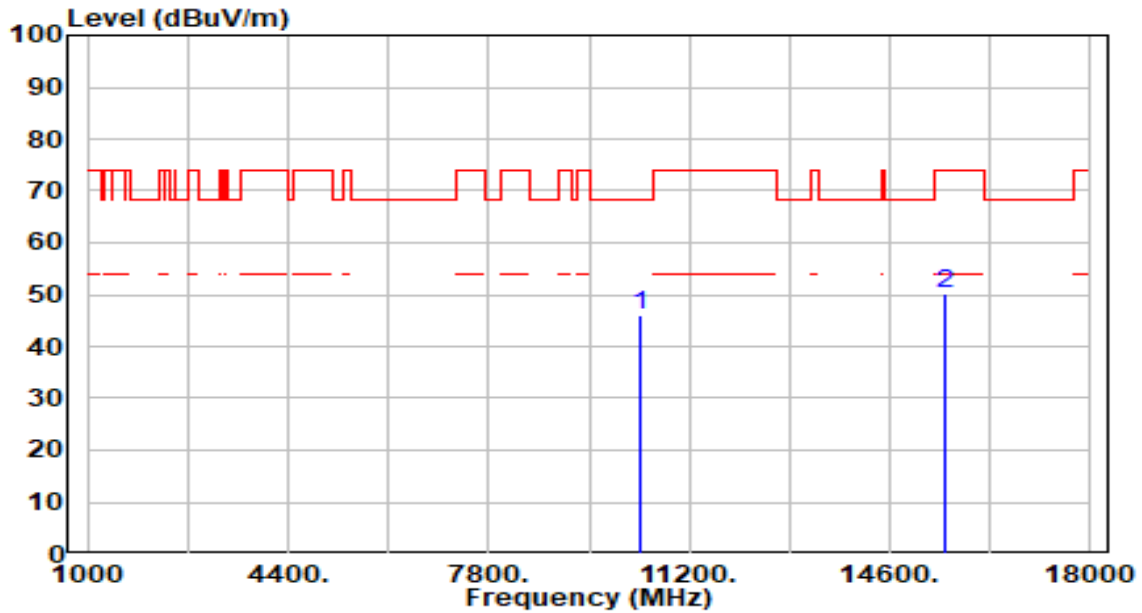


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.04	4.81	45.86	-22.34	68.20	200	0	Peak
2		15540.000	44.05	6.28	50.33	-23.67	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

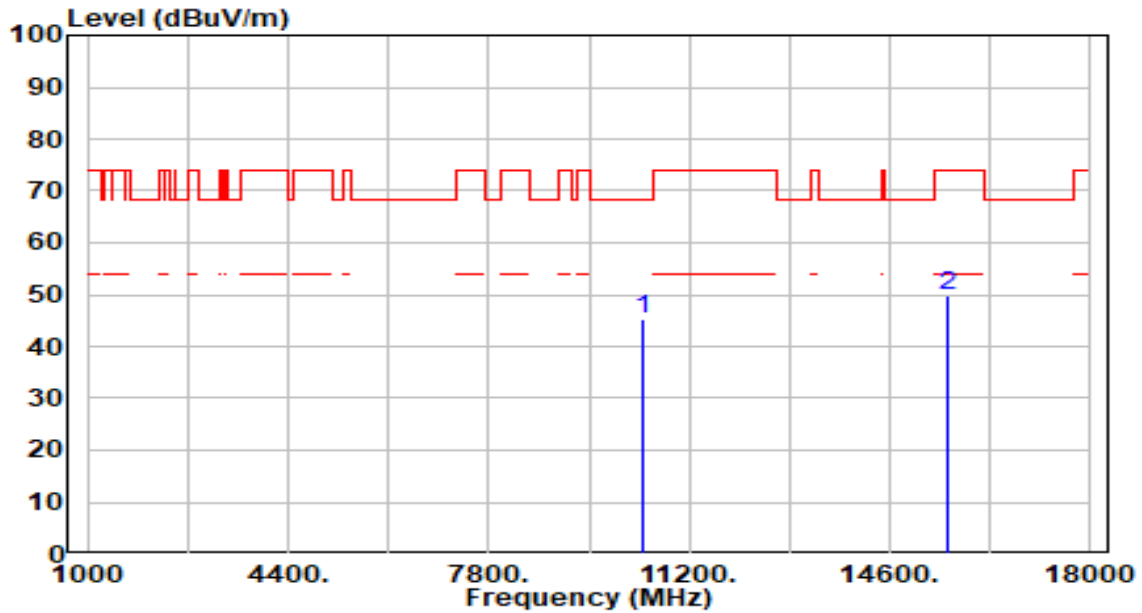


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	40.63	4.77	45.40	-22.80	68.20	200	69	Peak
2		15600.000	43.58	6.19	49.77	-24.23	74.00	200	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

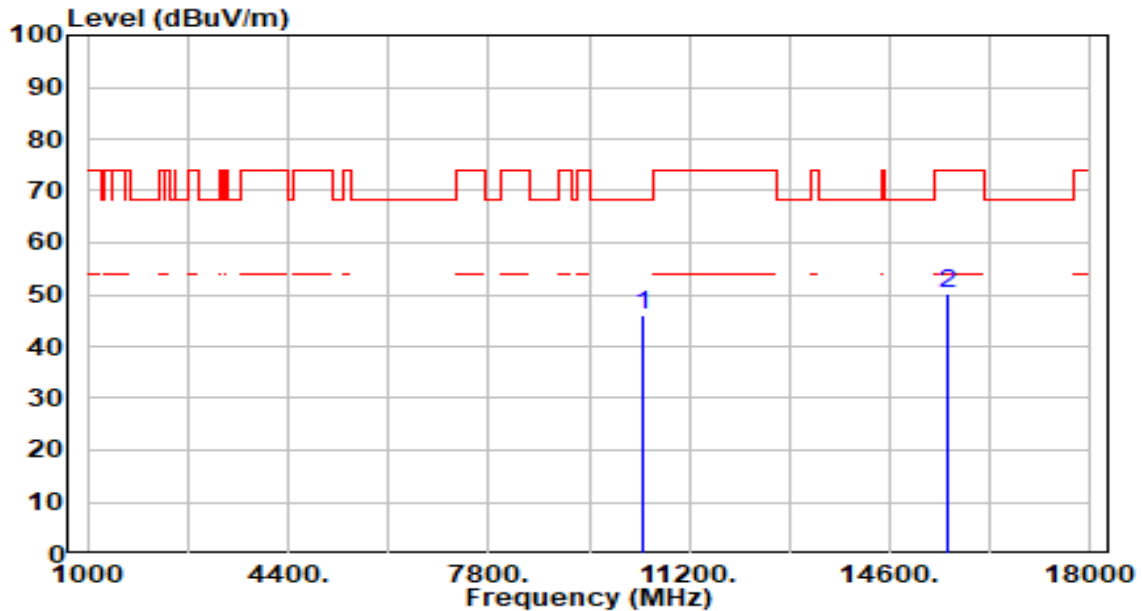


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.38	4.77	46.15	-22.05	68.20	200	91	Peak
2		15600.000	43.82	6.19	50.01	-23.99	74.00	200	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

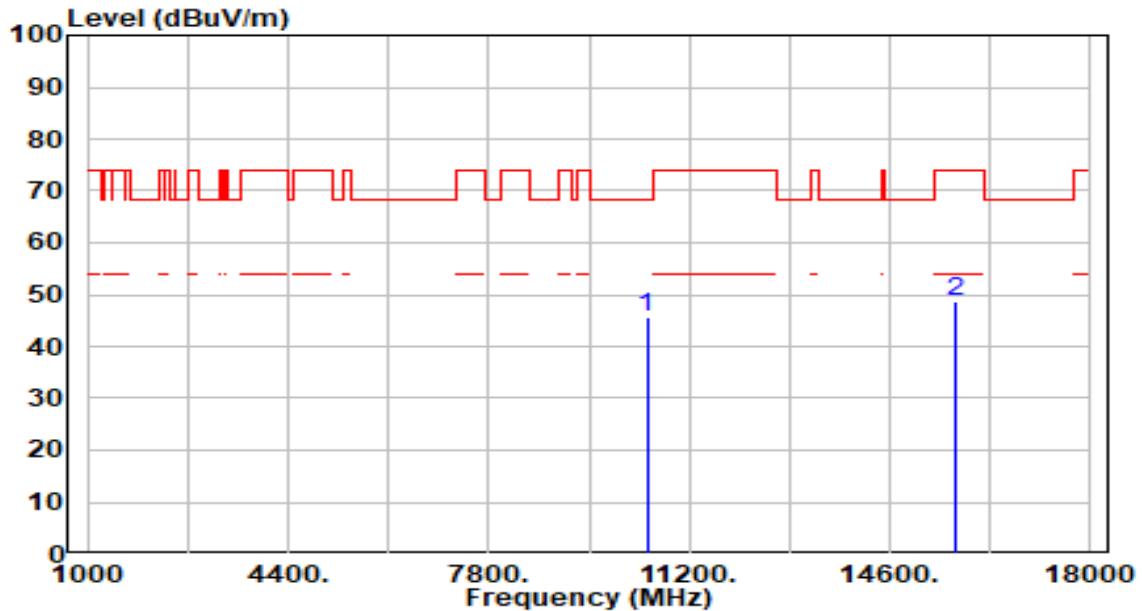


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.07	4.65	45.72	-22.48	68.20	200	69	Peak
2		15720.000	42.32	6.43	48.75	-25.25	74.00	200	129	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

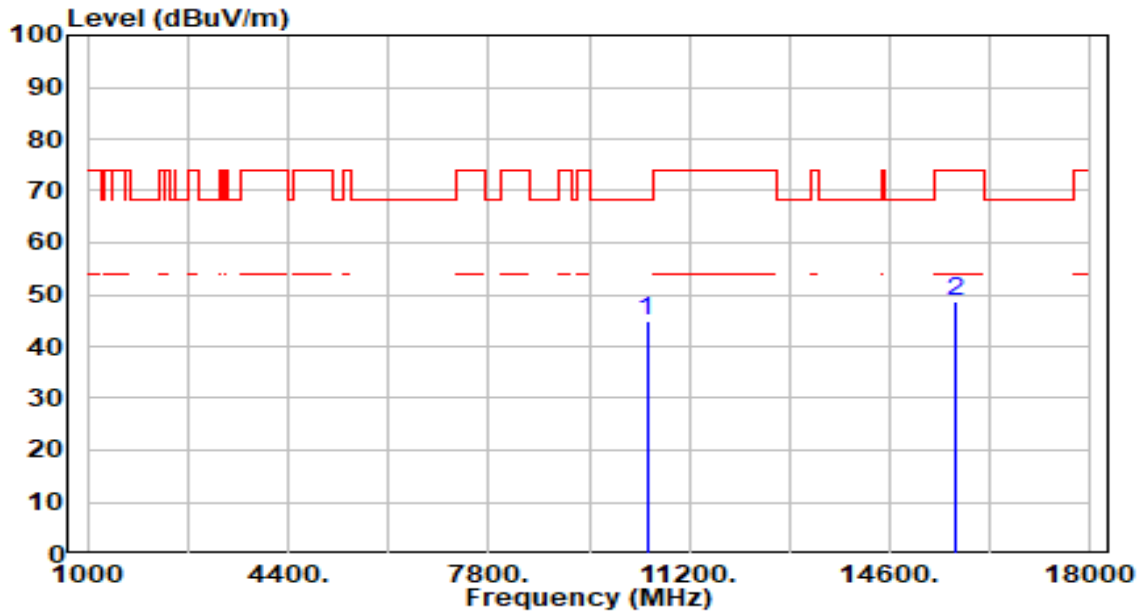


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	40.43	4.65	45.08	-23.12	68.20	200	15	Peak
2		15720.000	42.30	6.43	48.73	-25.27	74.00	200	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

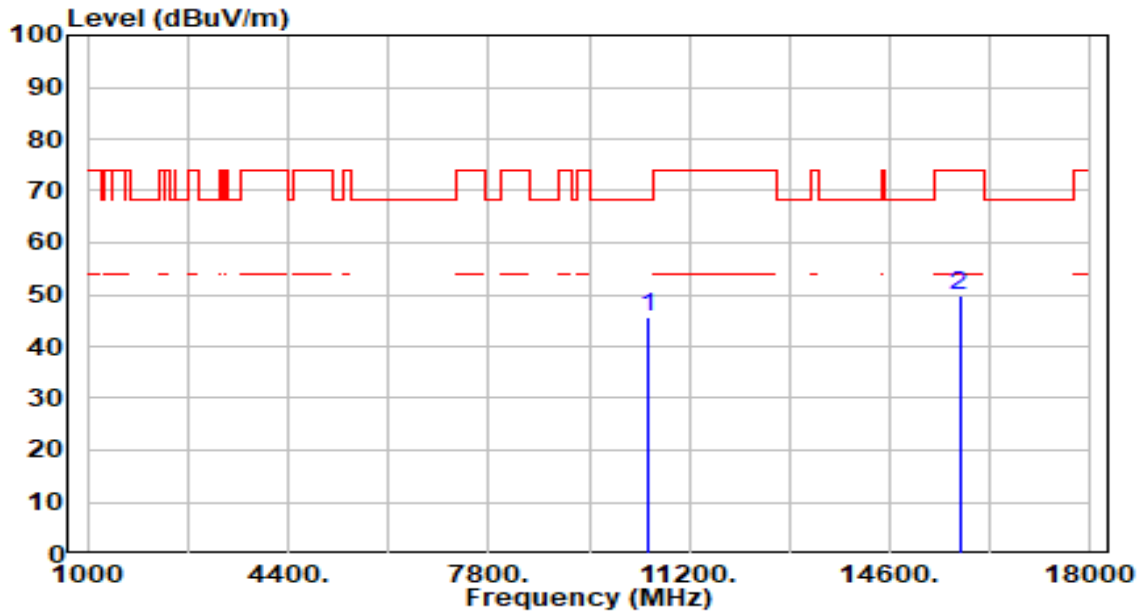


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.07	4.61	45.68	-22.52	68.20	200	0	Peak
2		15780.000	43.19	6.55	49.74	-24.26	74.00	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-23
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

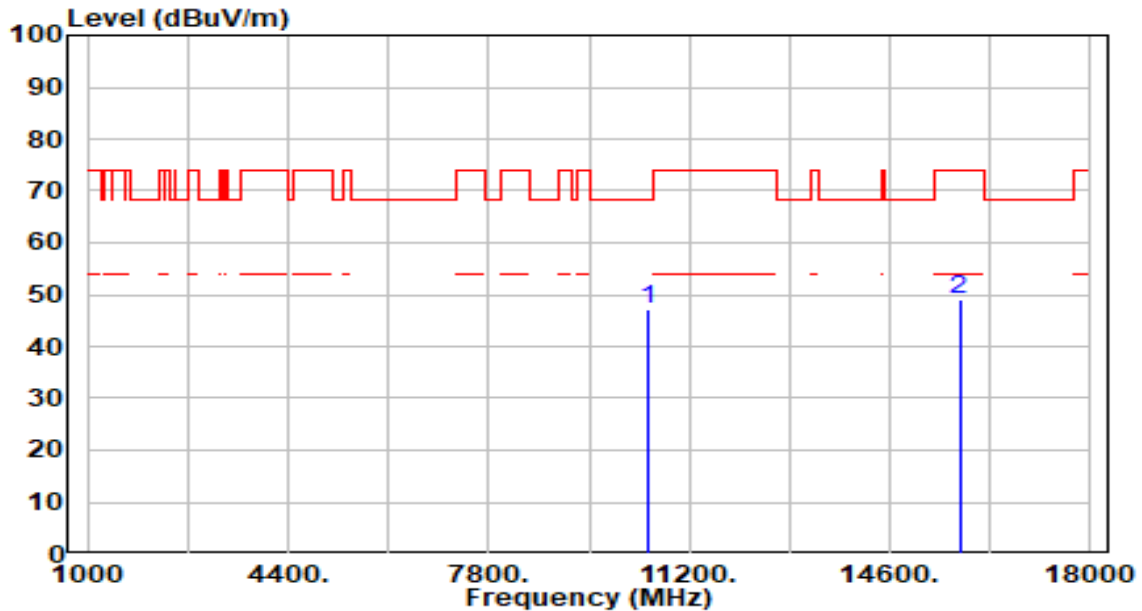


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.43	4.61	47.04	-21.16	68.20	200	333	Peak
2		15780.000	42.49	6.55	49.04	-24.96	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

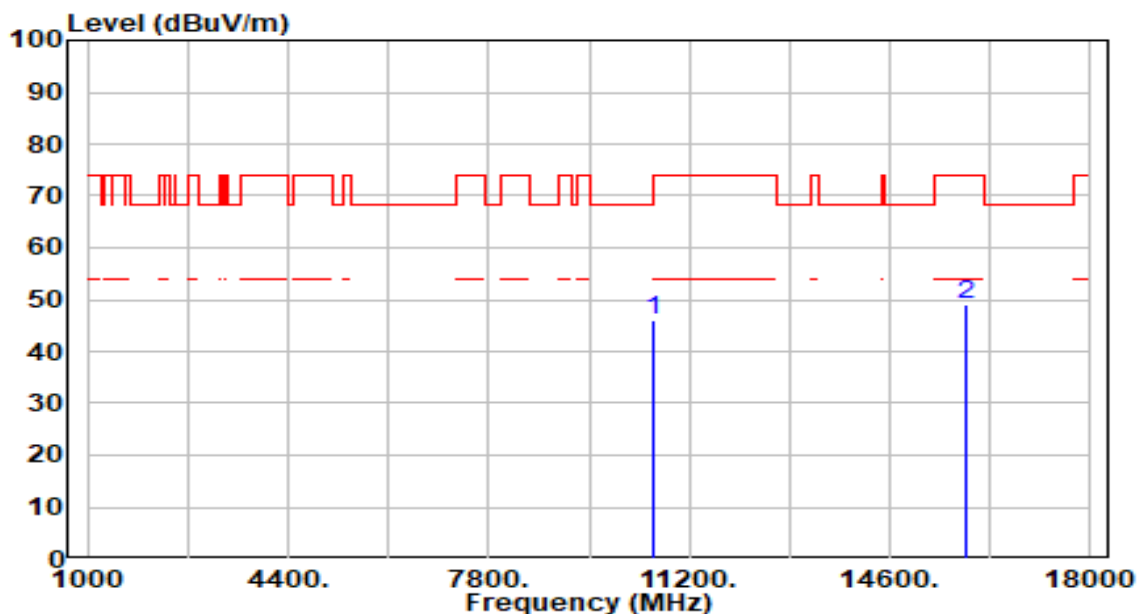


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.36	4.55	45.90	-22.30	68.20	200	111	Peak
2		15900.000	42.28	6.64	48.92	-25.08	74.00	200	77	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

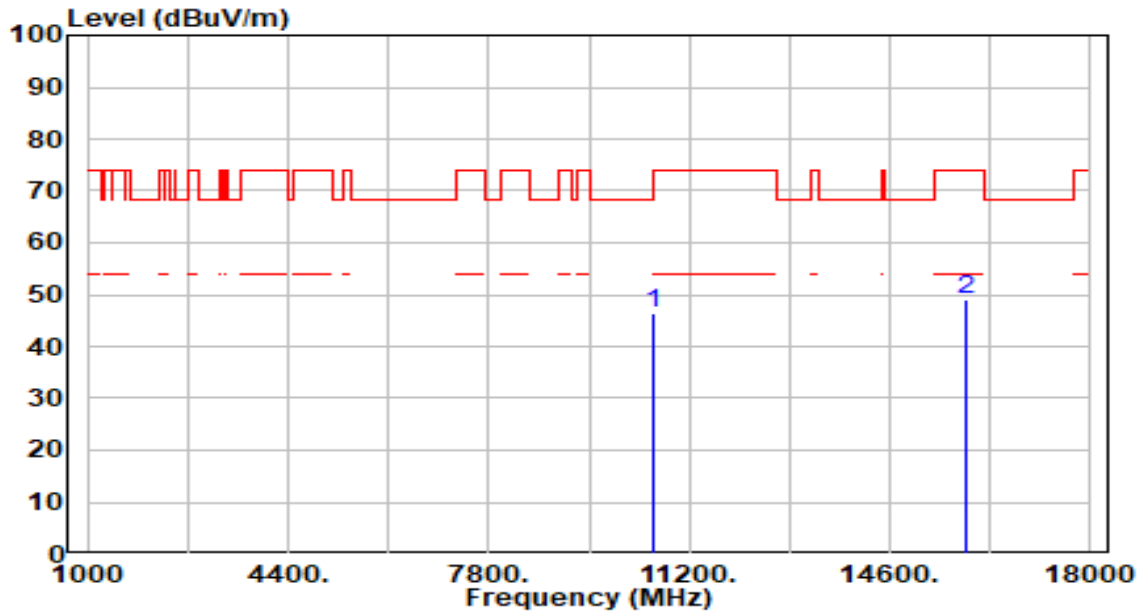


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.92	4.55	46.46	-21.74	68.20	200	91	Peak
2		15900.000	42.43	6.64	49.07	-24.93	74.00	200	113	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

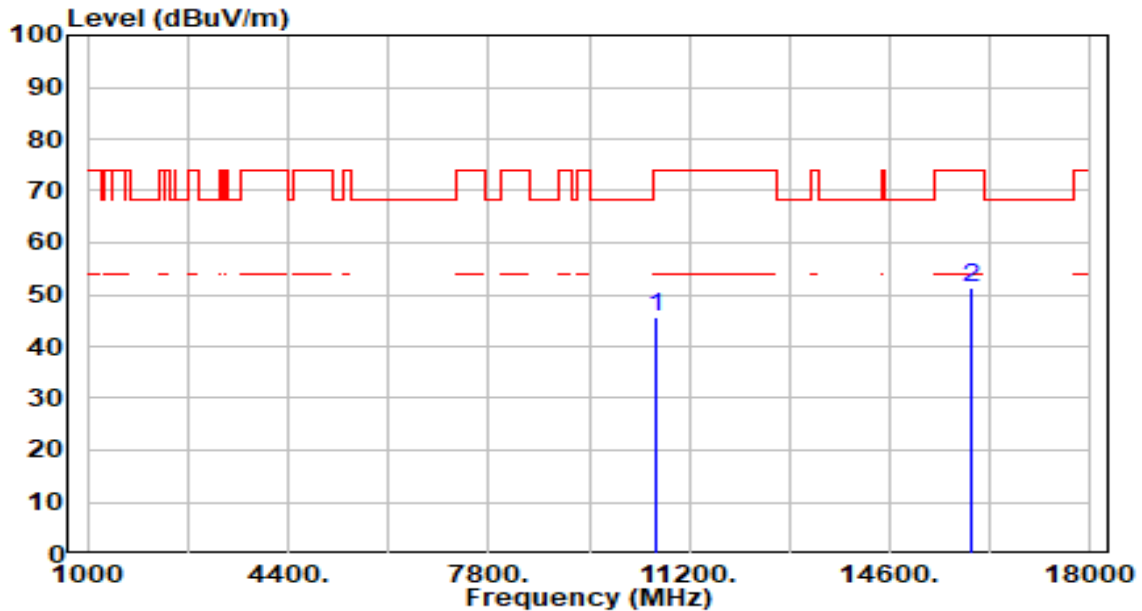


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.24	4.58	45.81	-28.19	74.00	200	78	Peak
2	*	15960.000	44.53	6.67	51.20	-22.80	74.00	200	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

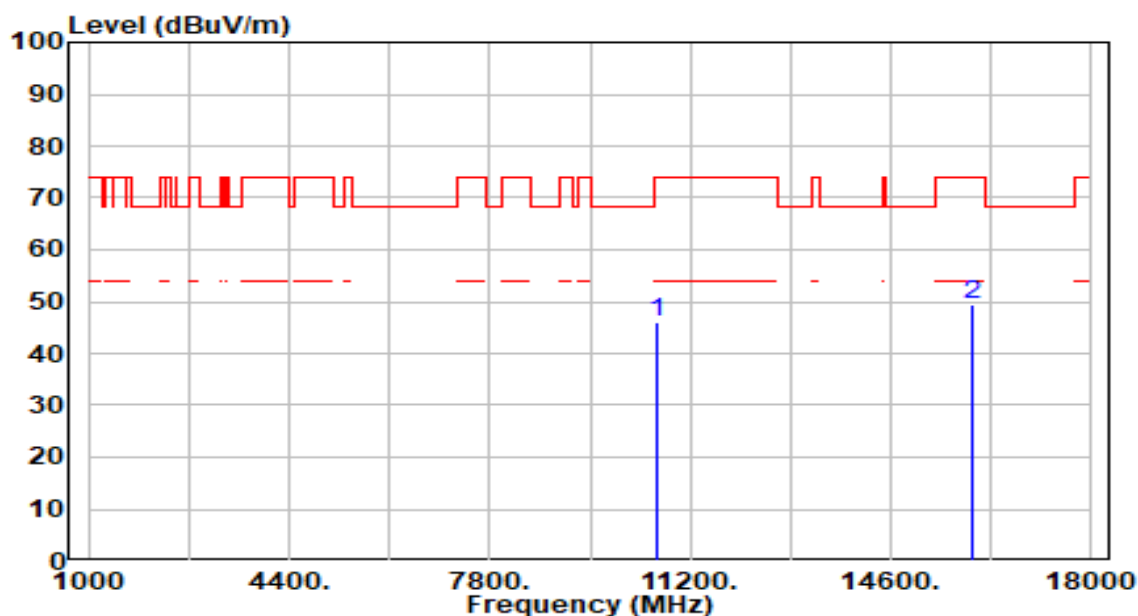


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.64	4.58	46.21	-27.79	74.00	200	69	Peak
2	*	15960.000	42.94	6.67	49.62	-24.38	74.00	200	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

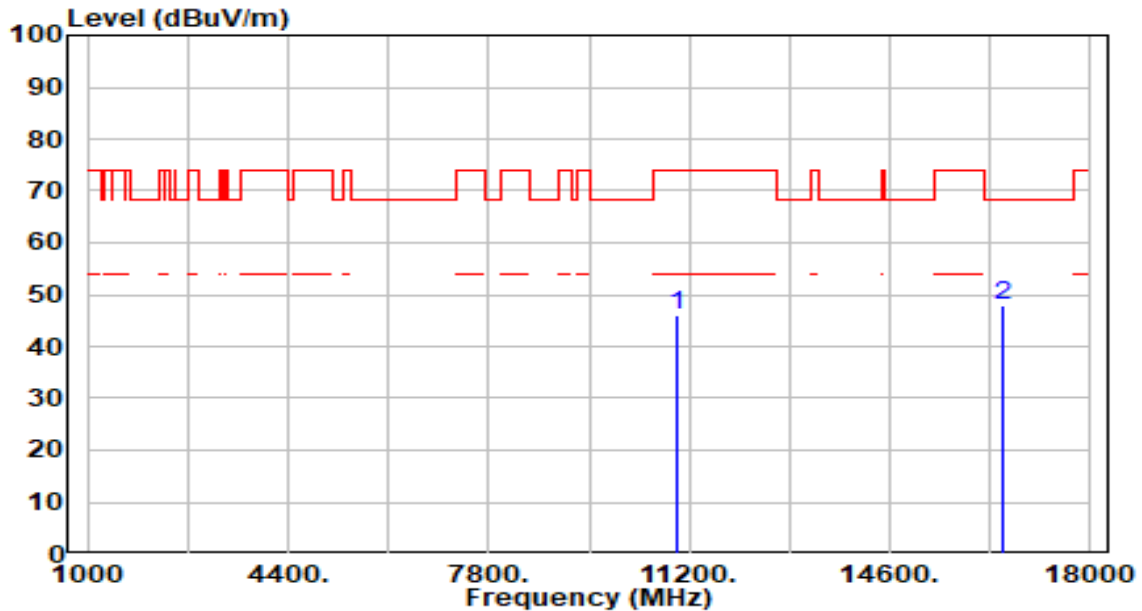


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.67	4.44	46.11	-27.89	74.00	200	15	Peak
2	*	16500.000	41.99	6.07	48.06	-20.14	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

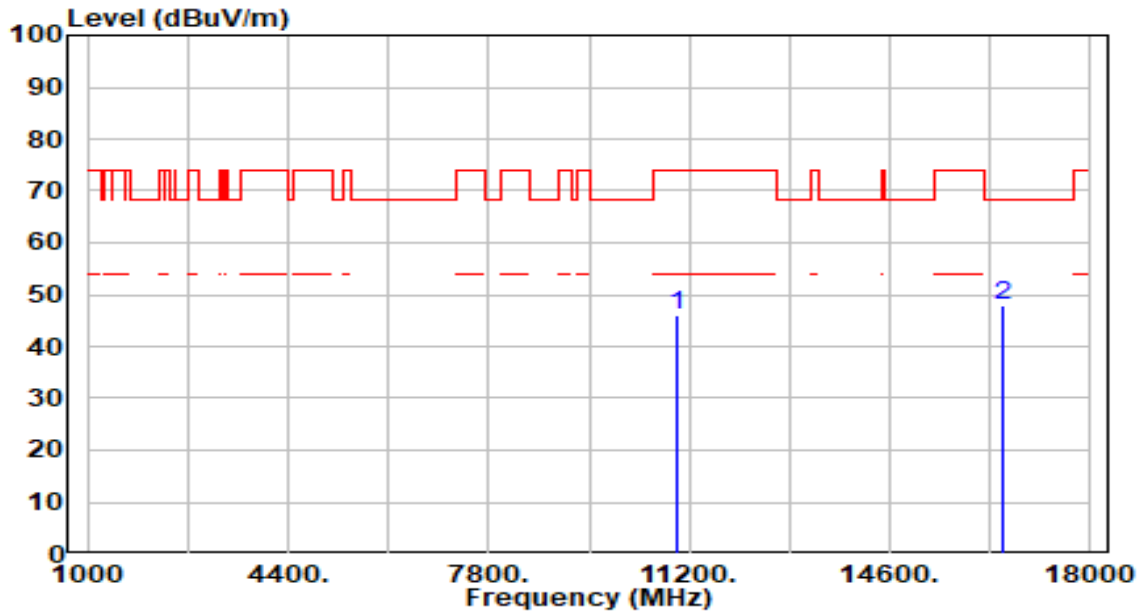


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.52	4.44	45.96	-28.04	74.00	200	0	Peak
2	* 16500.000	41.94	6.07	48.01	-20.19	68.20	200	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

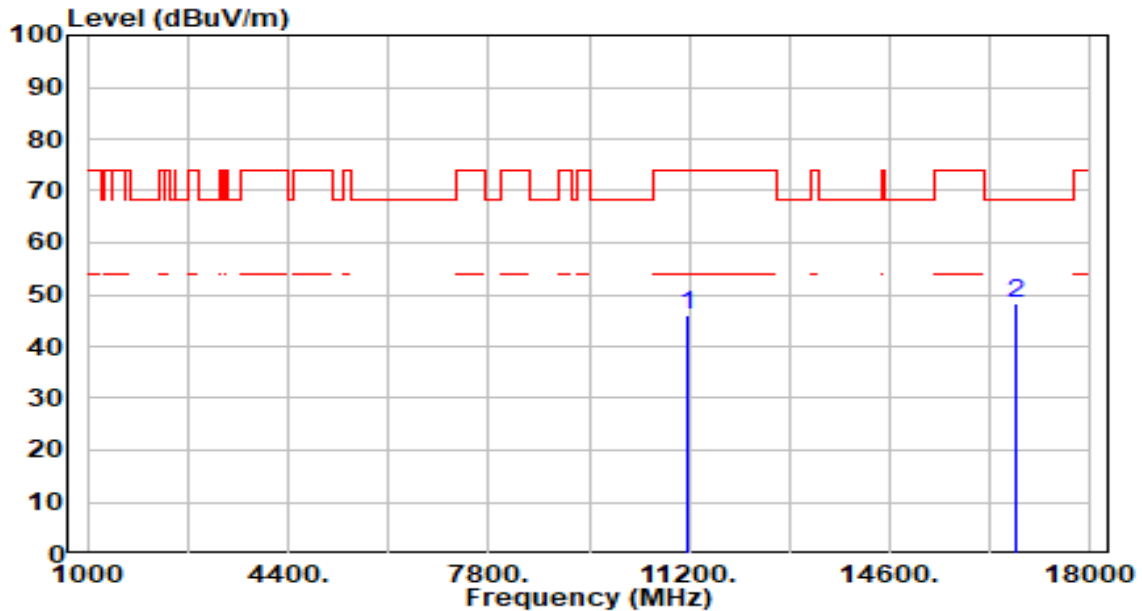


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.01	4.87	45.88	-28.12	74.00	200	154	Peak
2	*	16740.000	42.35	6.01	48.37	-19.83	68.20	200	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

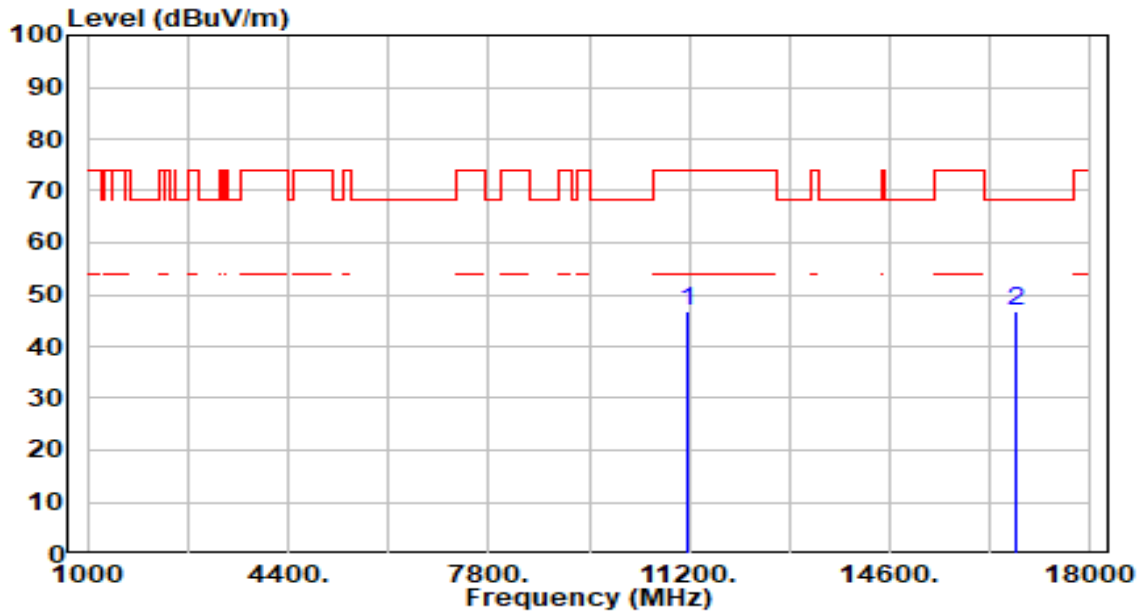


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.77	4.87	46.64	-27.36	74.00	200	91	Peak
2	*	16740.000	40.90	6.01	46.92	-21.28	68.20	200	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

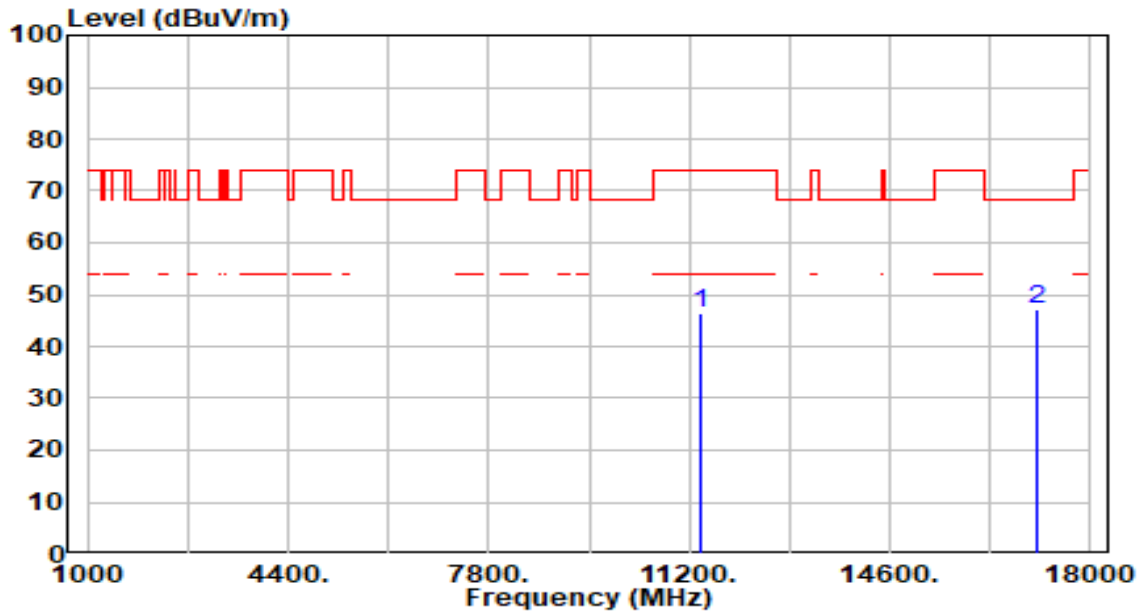


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.36	5.22	46.57	-27.43	74.00	200	15	Peak
2	*	17100.000	41.62	5.54	47.16	-21.04	68.20	200	161	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

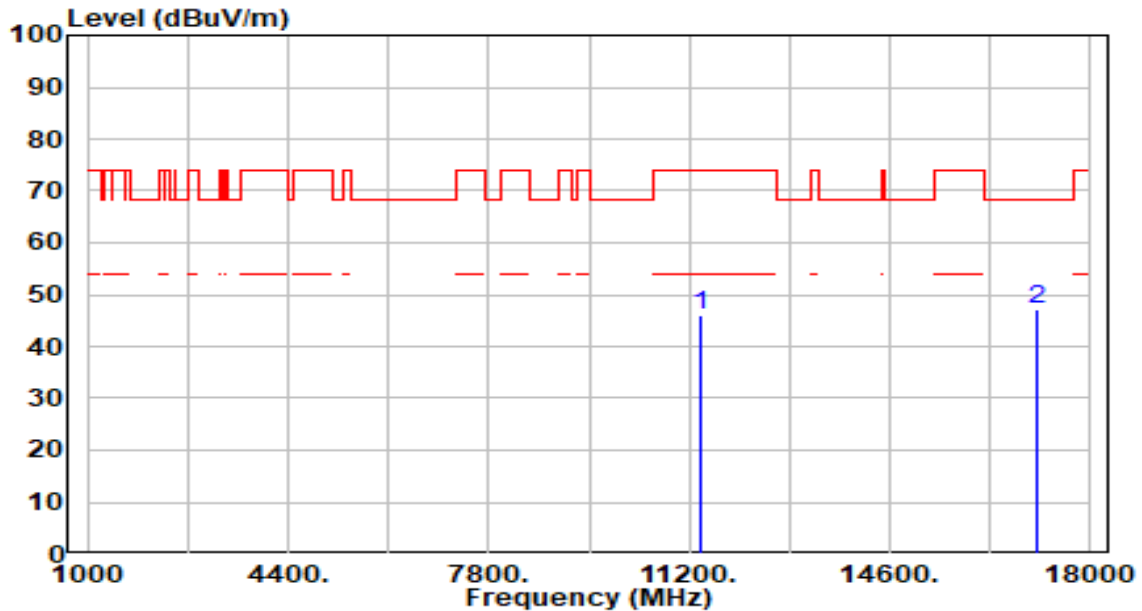


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	40.93	5.22	46.14	-27.86	74.00	200	47	Peak
2	*	17100.000	41.77	5.54	47.31	-20.89	68.20	200	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

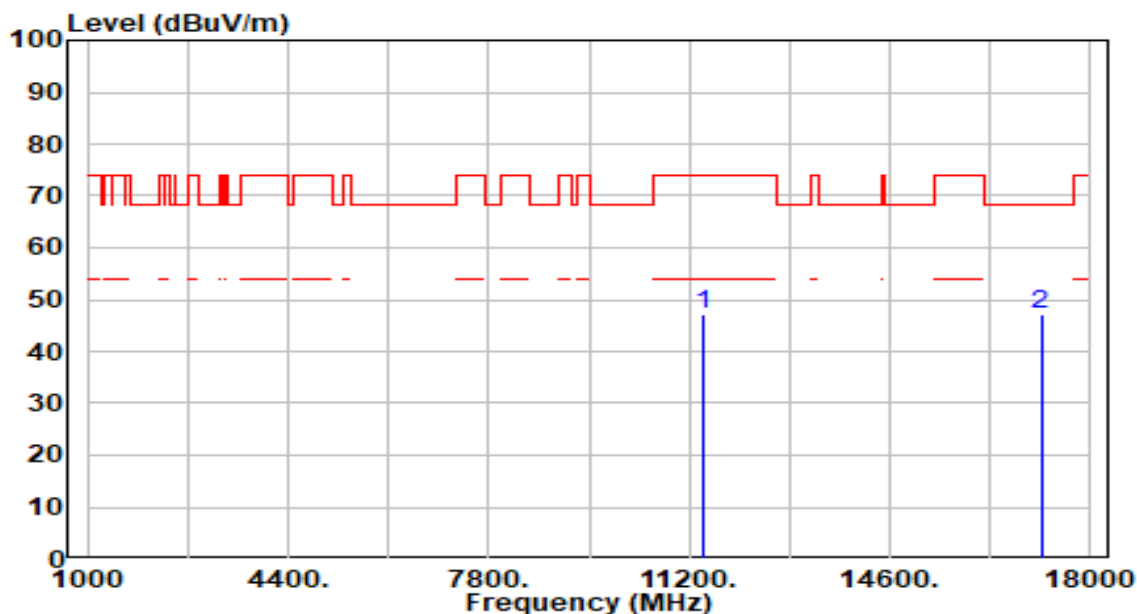


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.95	5.24	47.20	-26.80	74.00	200	77	Peak
2	*	17160.000	41.69	5.41	47.10	-21.10	68.20	200	224	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

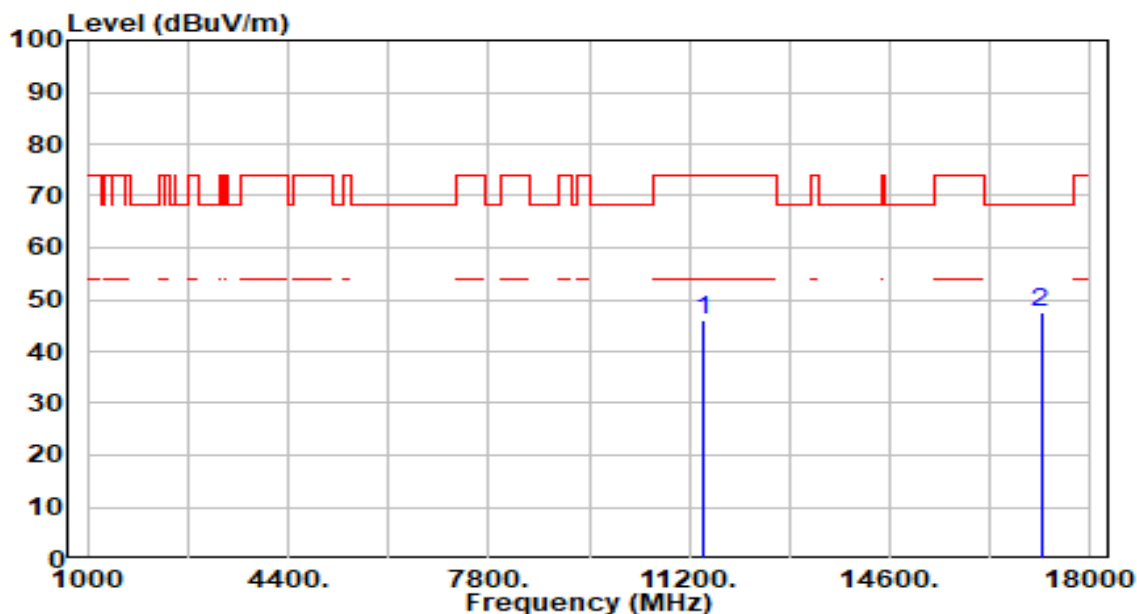


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	40.91	5.24	46.15	-27.85	74.00	200	47	Peak
2	*	17160.000	42.17	5.41	47.58	-20.62	68.20	200	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

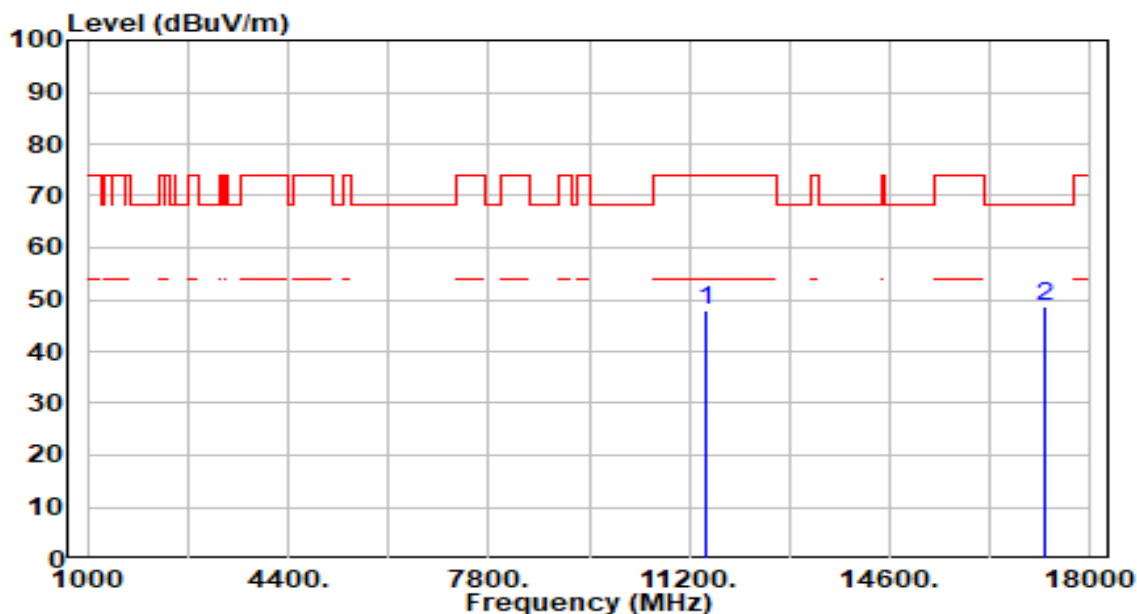


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	42.52	5.28	47.80	-26.20	74.00	200	256	Peak
2	*	17235.000	43.51	5.25	48.76	-19.44	68.20	200	97	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

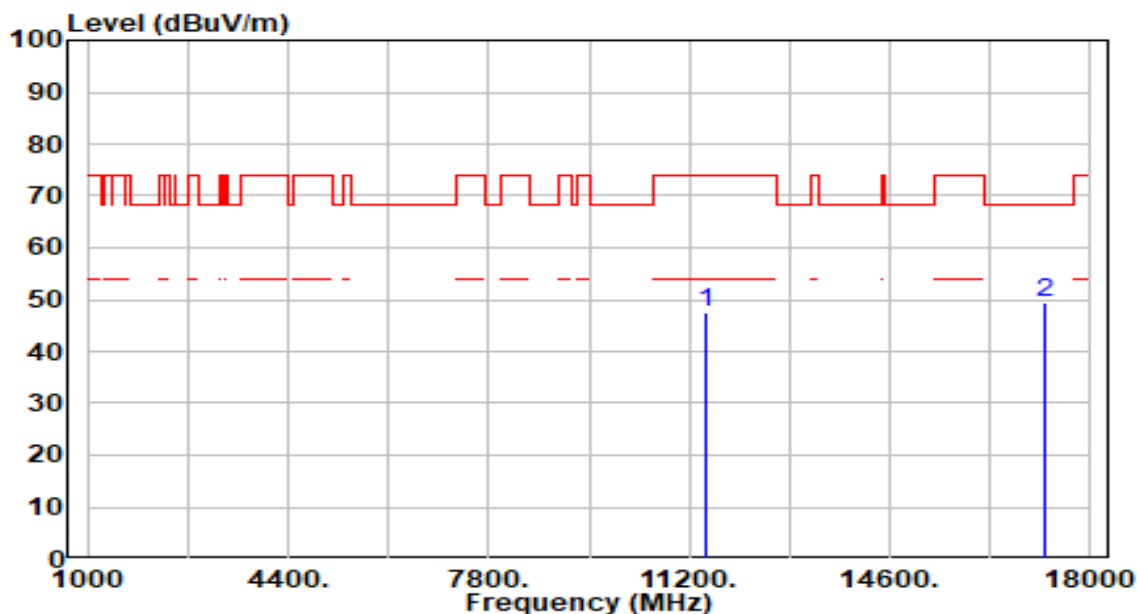


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	42.10	5.28	47.38	-26.62	74.00	200	152	Peak
2	*	17235.000	44.28	5.25	49.53	-18.67	68.20	200	61	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

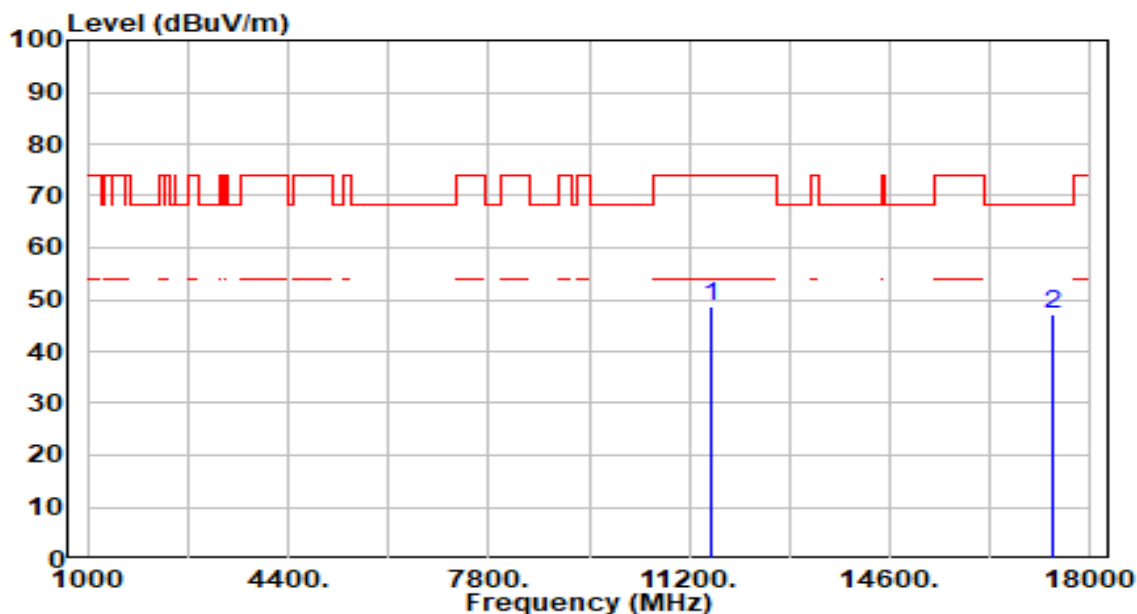


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	43.20	5.35	48.55	-25.45	74.00	200	276	Peak
2	*	17355.000	42.24	4.99	47.23	-20.97	68.20	200	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

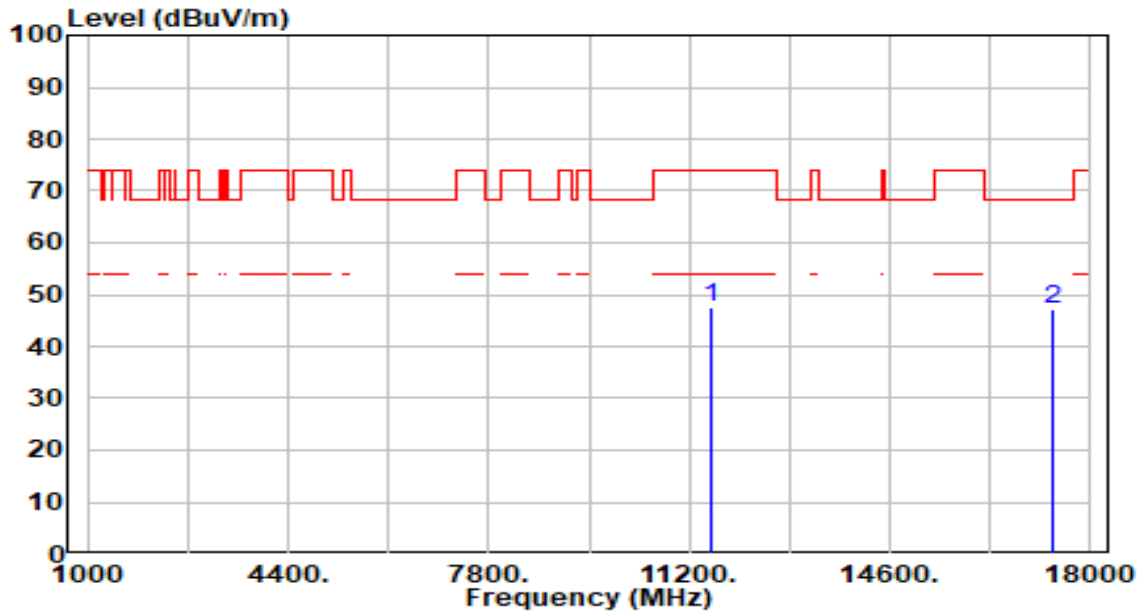


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	42.36	5.35	47.71	-26.29	74.00	200	360	Peak
2	*	17355.000	42.07	4.99	47.06	-21.14	68.20	200	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

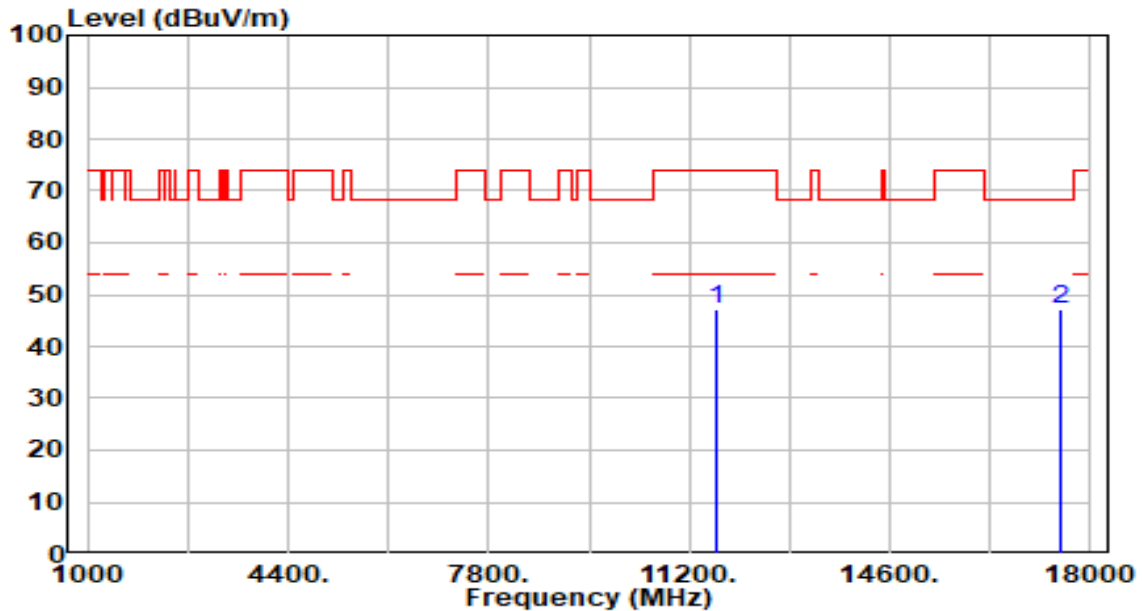


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.96	5.37	47.33	-26.67	74.00	200	136	Peak
2	*	17475.000	42.02	5.02	47.05	-21.15	68.20	200	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

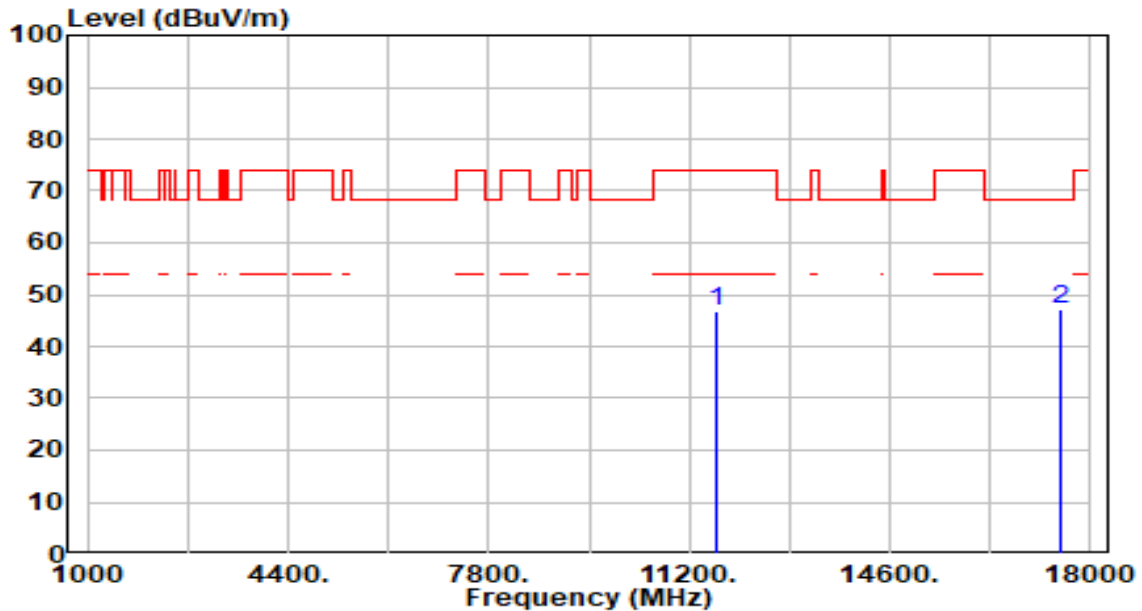


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.55	5.37	46.92	-27.08	74.00	200	164	Peak
2	*	17475.000	42.21	5.02	47.24	-20.96	68.20	200	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

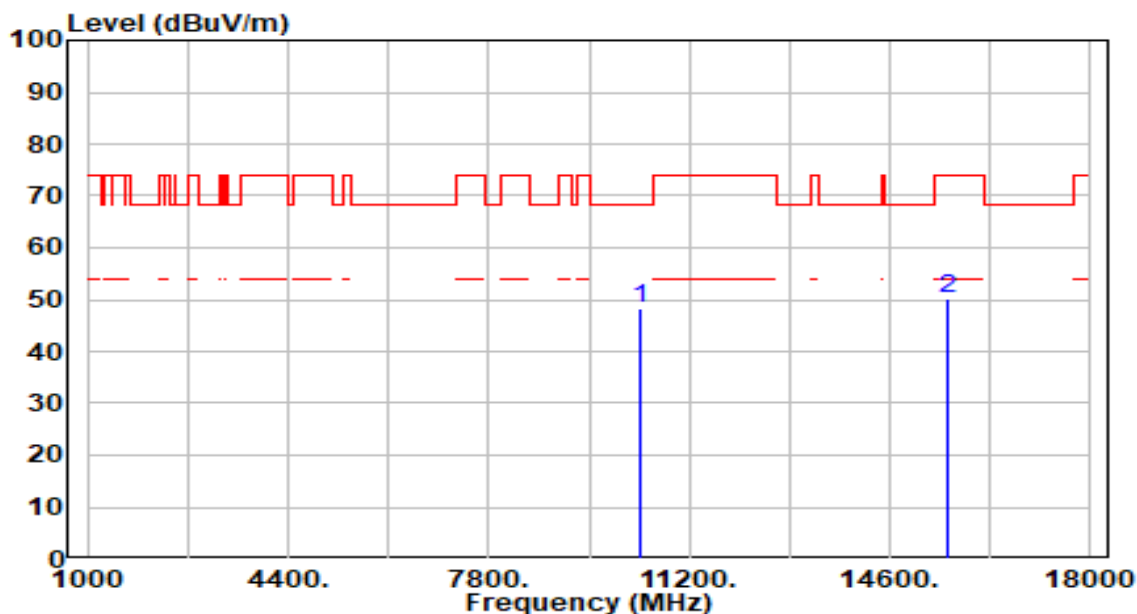


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	43.49	4.79	48.28	-19.92	68.20	200	247	Peak
2		15570.000	44.04	6.24	50.28	-23.72	74.00	200	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

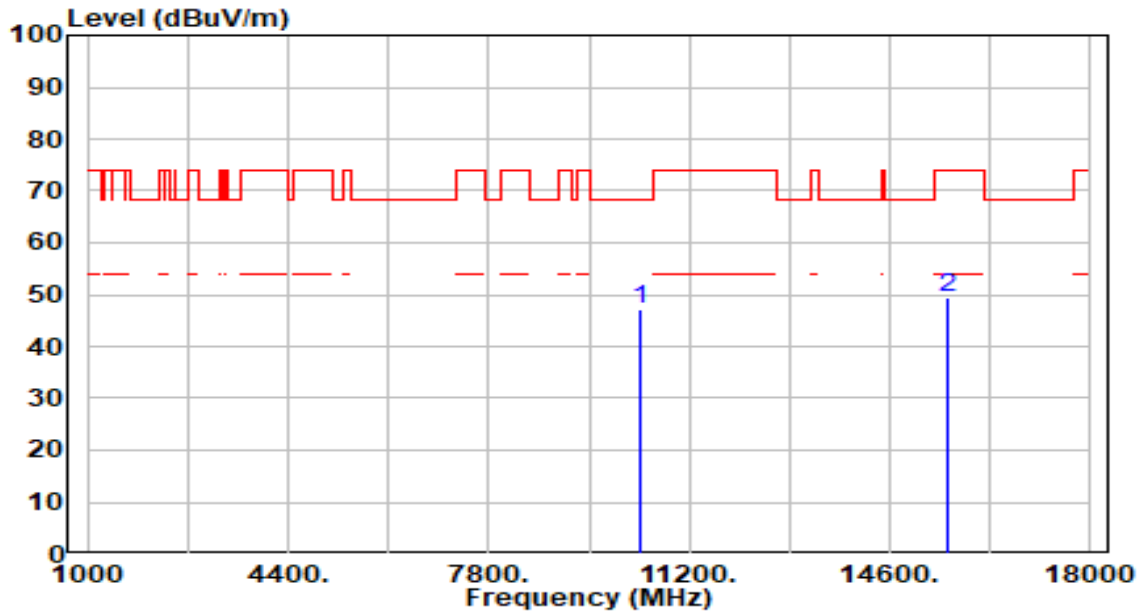


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	42.30	4.79	47.09	-21.11	68.20	200	221	Peak
2		15570.000	43.22	6.24	49.46	-24.54	74.00	200	77	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

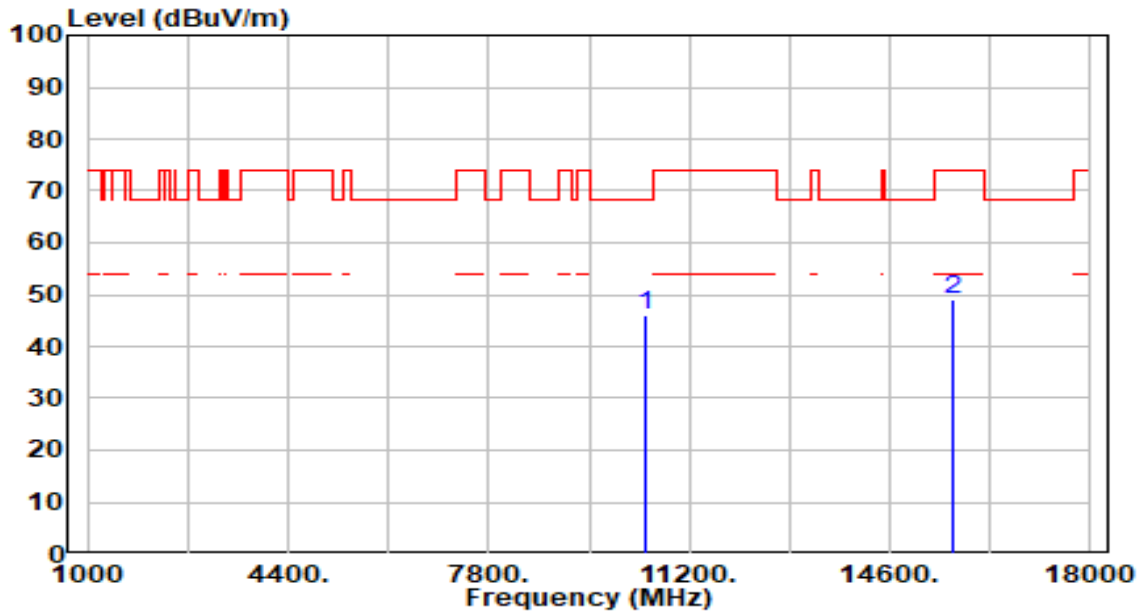


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	41.46	4.68	46.14	-22.06	68.20	200	69	Peak
2		15690.000	42.58	6.37	48.96	-25.04	74.00	200	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

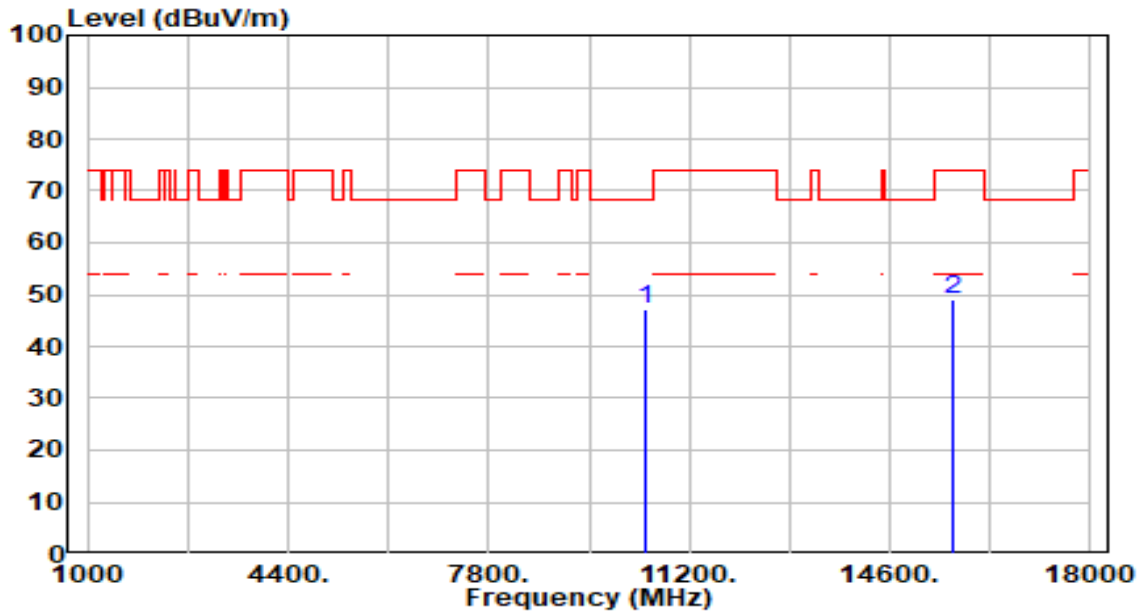


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	42.47	4.68	47.15	-21.05	68.20	200	15	Peak
2		15690.000	42.72	6.37	49.09	-24.91	74.00	200	137	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

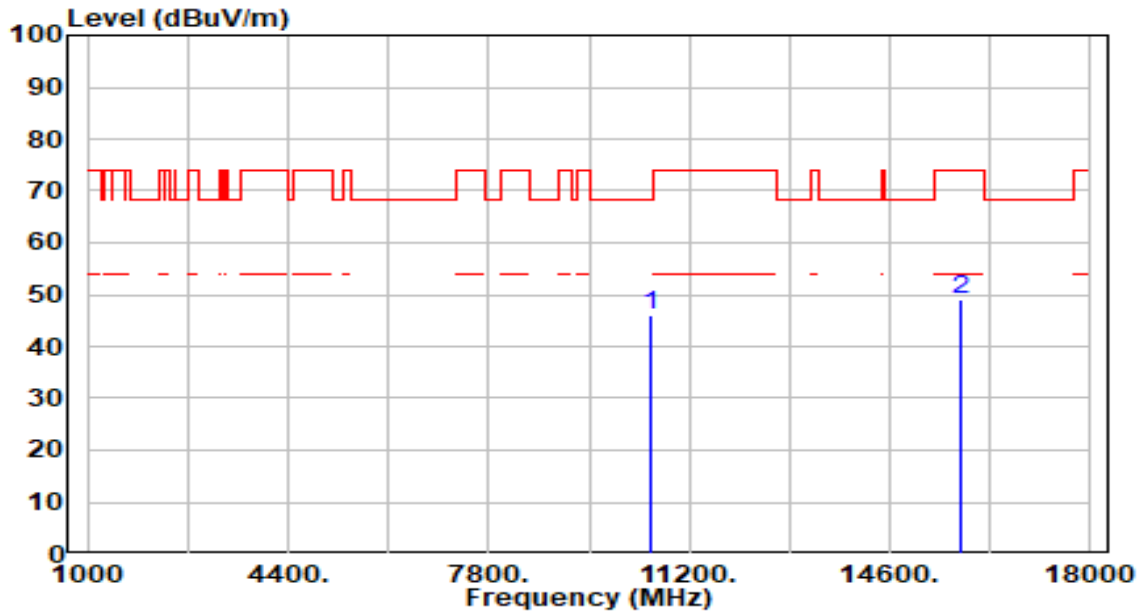


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.40	4.59	46.00	-22.20	68.20	200	91	Peak
2		15810.000	42.56	6.60	49.16	-24.84	74.00	200	223	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

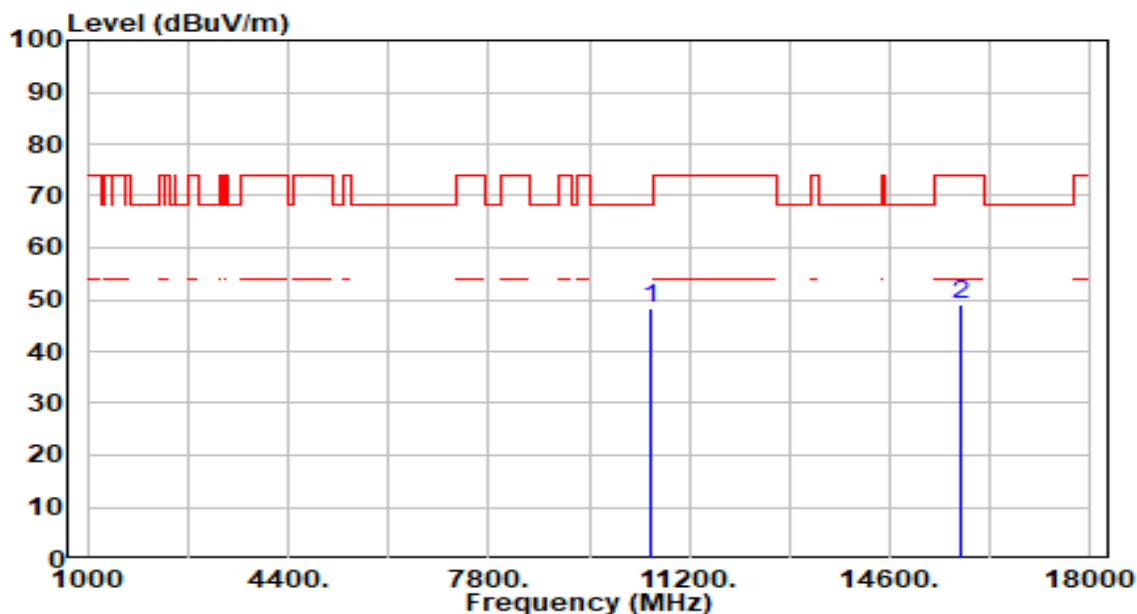


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	43.83	4.59	48.42	-19.78	68.20	200	77	Peak
2		15810.000	42.41	6.60	49.01	-24.99	74.00	200	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

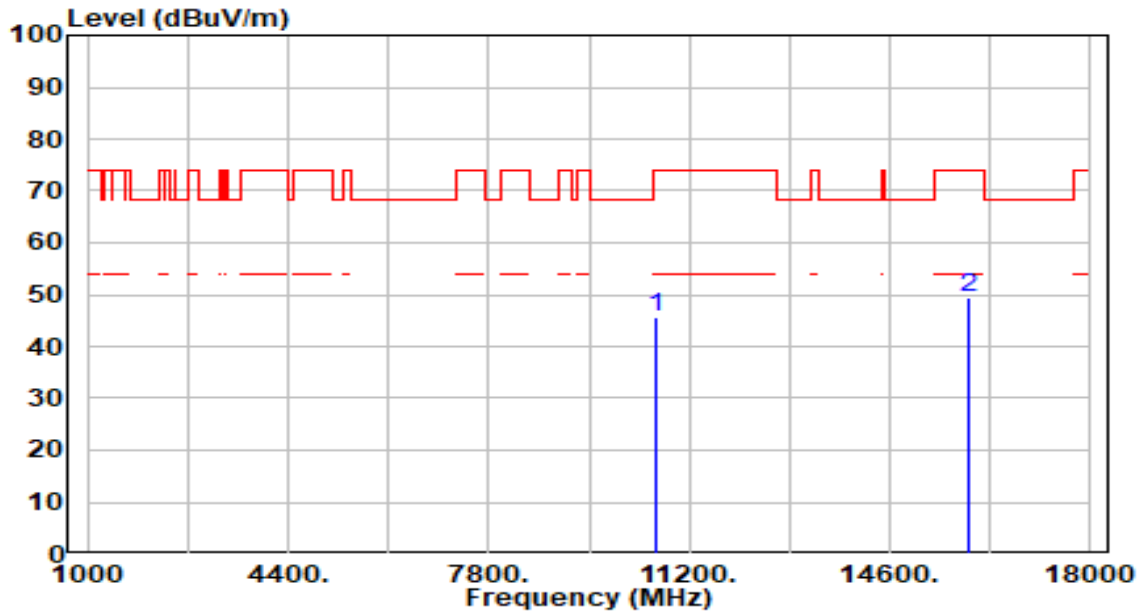


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.08	4.56	45.65	-28.35	74.00	200	69	Peak
2	* 15930.000	42.80	6.66	49.46	-24.54	74.00	200	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

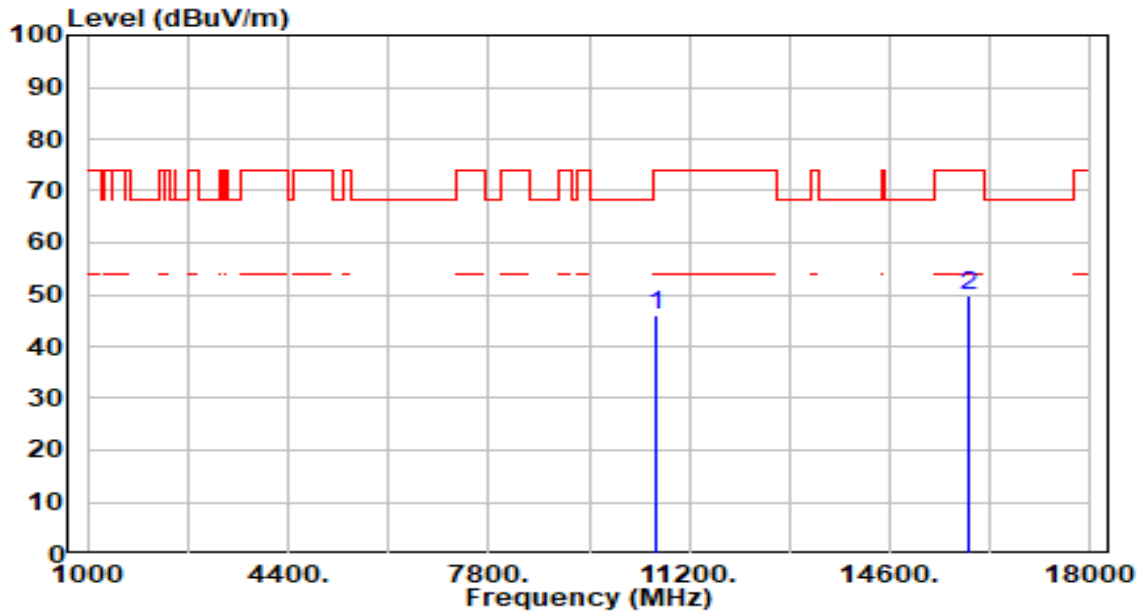


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.59	4.56	46.15	-27.85	74.00	200	36	Peak
2	* 15930.000	43.08	6.66	49.74	-24.26	74.00	200	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

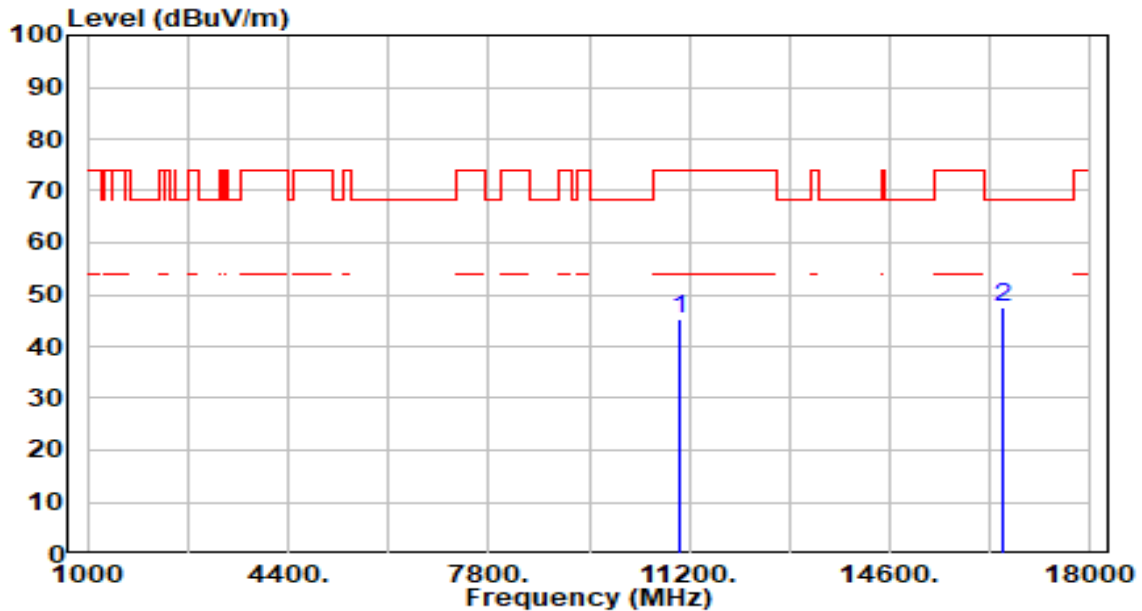


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	40.63	4.49	45.12	-28.88	74.00	200	78	Peak
2	*	16530.000	41.63	6.05	47.68	-20.52	68.20	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

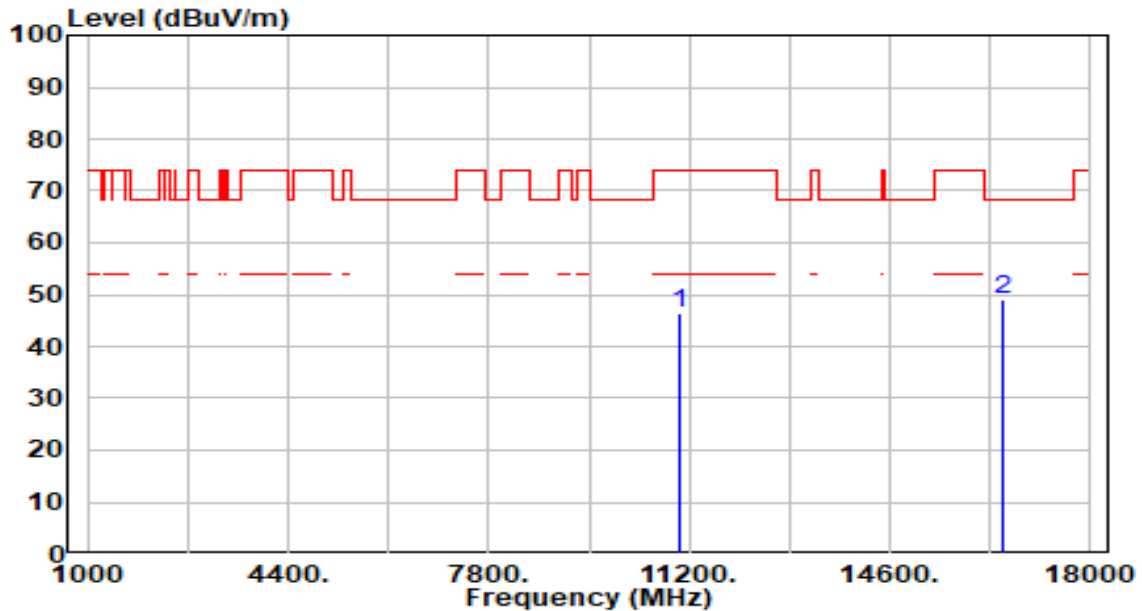


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	41.81	4.49	46.30	-27.70	74.00	200	69	Peak
2	*	16530.000	43.06	6.05	49.11	-19.09	68.20	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

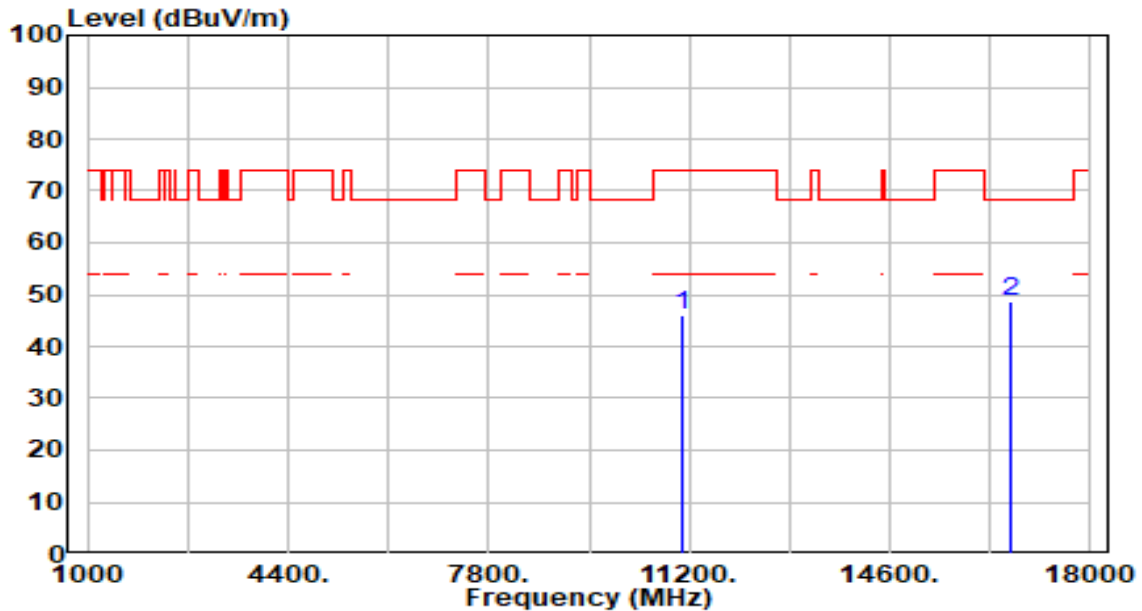


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.45	4.71	46.15	-27.85	74.00	200	47	Peak
2	*	16650.000	42.69	6.00	48.69	-19.51	68.20	200	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

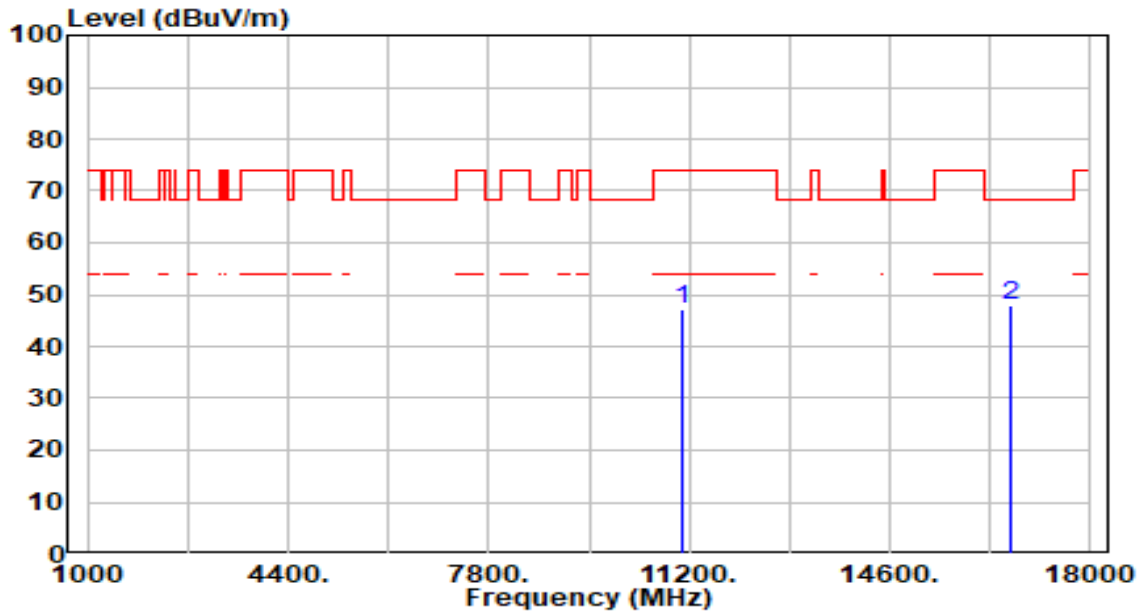


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	42.39	4.71	47.10	-26.90	74.00	200	91	Peak
2	*	16650.000	42.03	6.00	48.03	-20.17	68.20	200	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

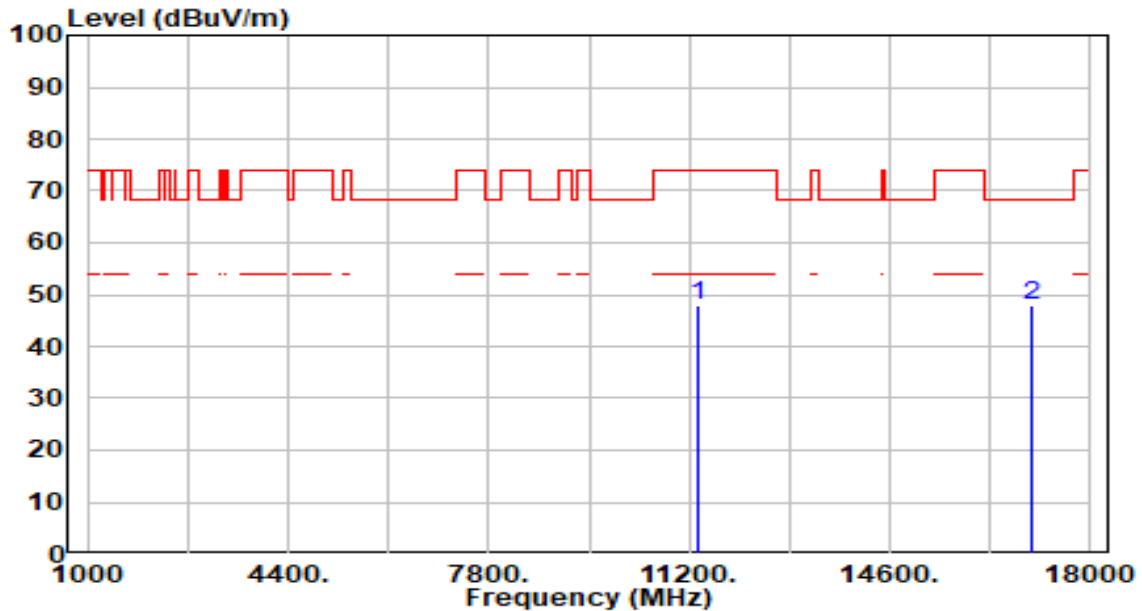


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	42.60	5.14	47.74	-26.26	74.00	200	77	Peak
2	*	17010.000	42.16	5.74	47.90	-20.30	68.20	200	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

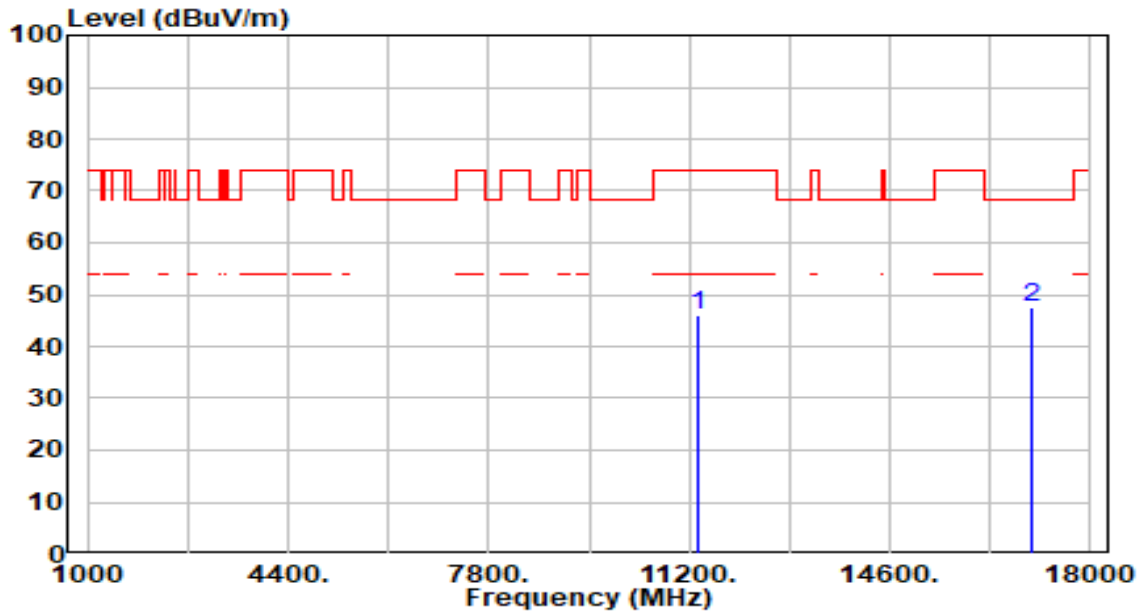


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	40.97	5.14	46.12	-27.88	74.00	200	15	Peak
2	*	17010.000	41.96	5.74	47.70	-20.50	68.20	200	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

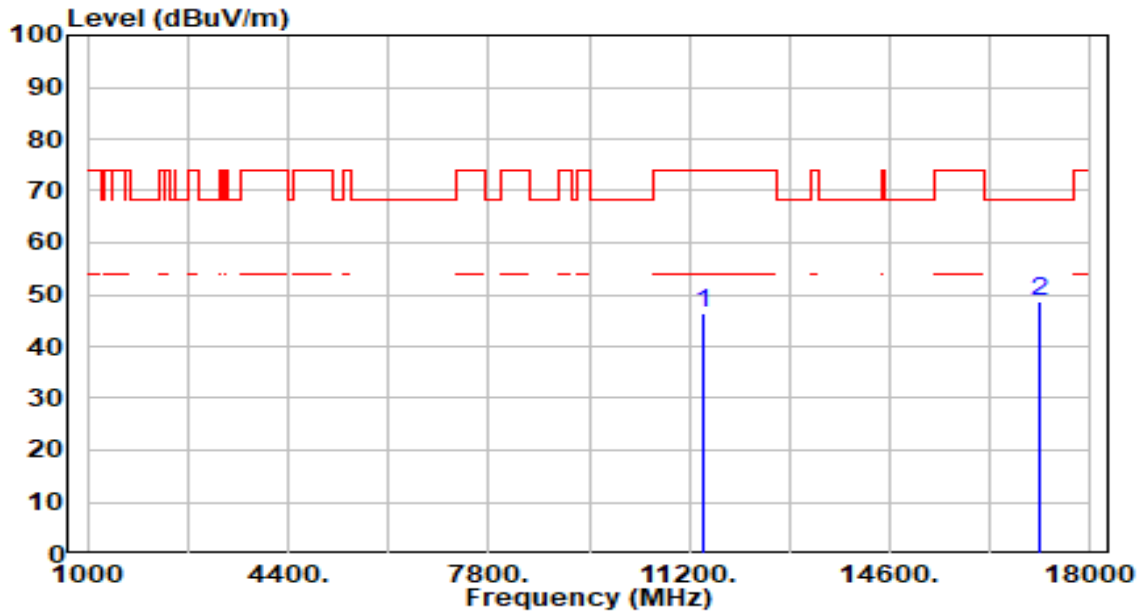


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.25	5.23	46.48	-27.52	74.00	200	345	Peak
2	*	17130.000	43.07	5.48	48.55	-19.65	68.20	200	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

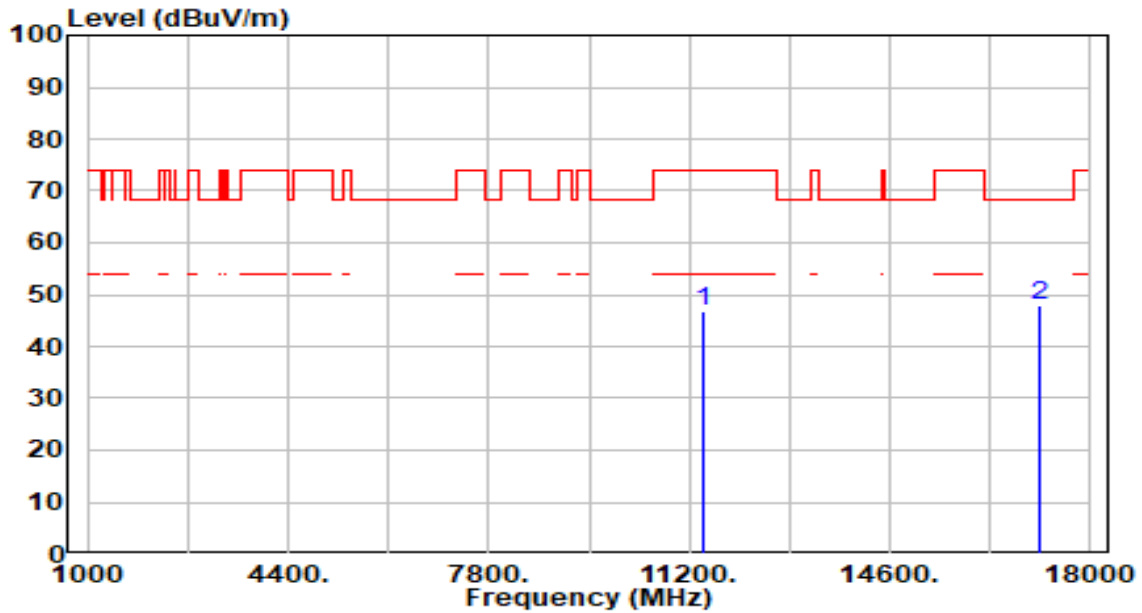


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.65	5.23	46.88	-27.12	74.00	200	69	Peak
2	*	17130.000	42.38	5.48	47.86	-20.34	68.20	200	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

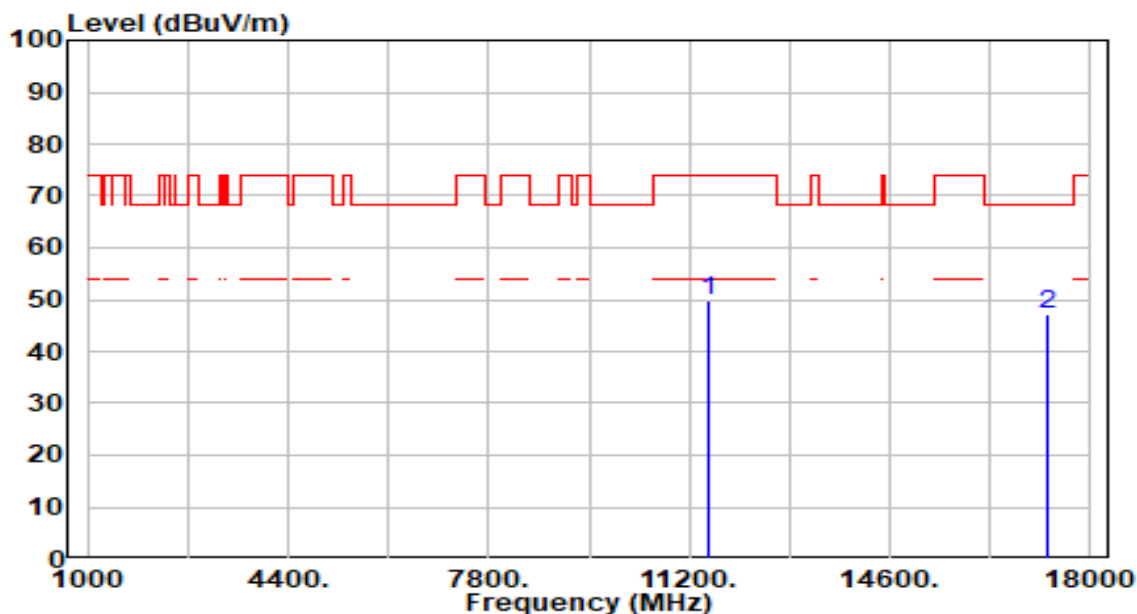


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	44.47	5.29	49.77	-24.23	74.00	200	299	Peak
2	*	17265.000	42.04	5.18	47.22	-20.98	68.20	200	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

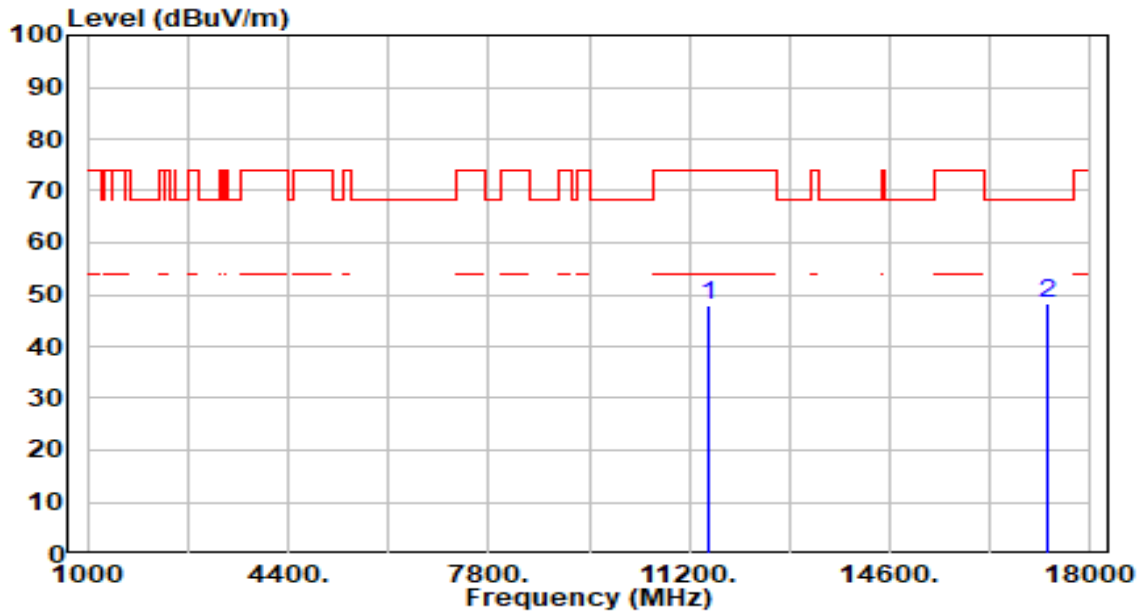


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	42.57	5.29	47.86	-26.14	74.00	200	72	Peak
2	*	17265.000	43.11	5.18	48.29	-19.91	68.20	200	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

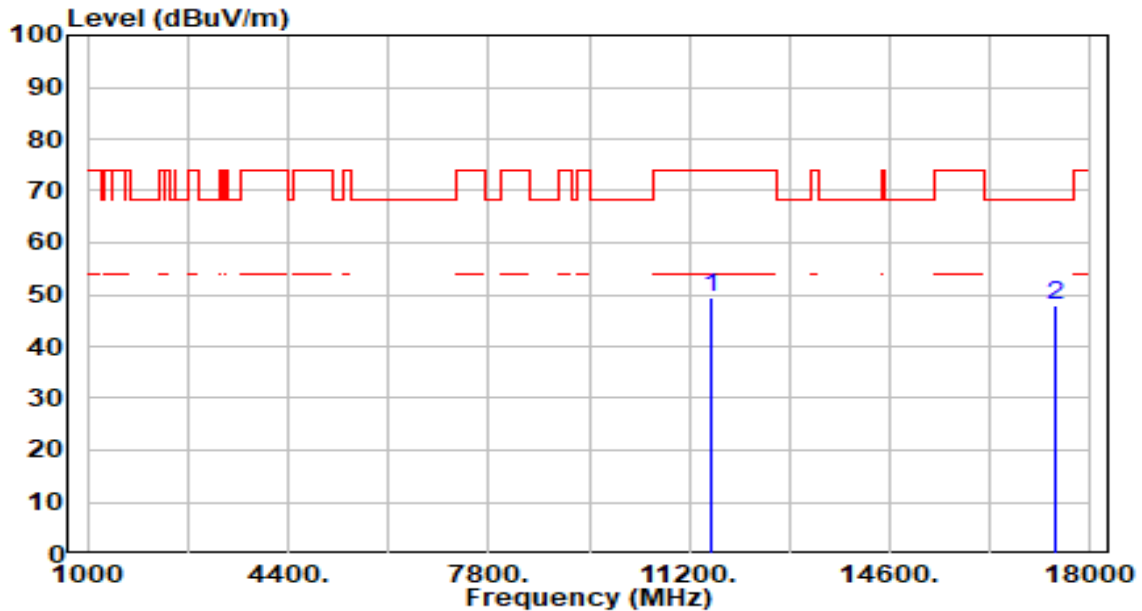


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	44.18	5.37	49.55	-24.45	74.00	200	283	Peak
2	*	17385.000	43.09	4.92	48.01	-20.19	68.20	200	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

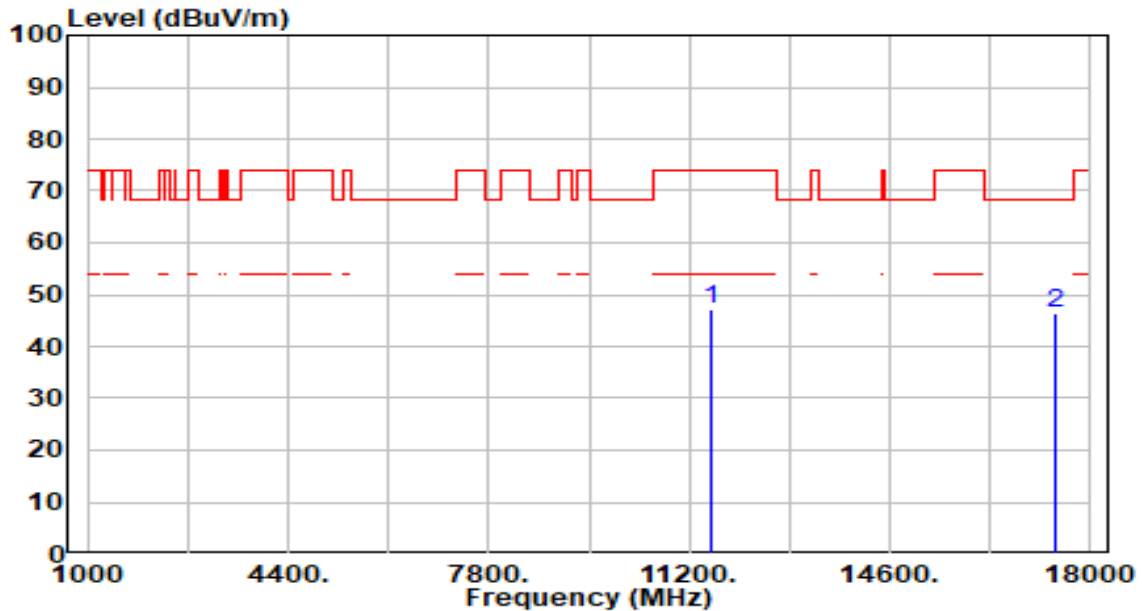


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	41.73	5.37	47.10	-26.90	74.00	200	187	Peak
2	*	17385.000	41.67	4.92	46.59	-21.61	68.20	200	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

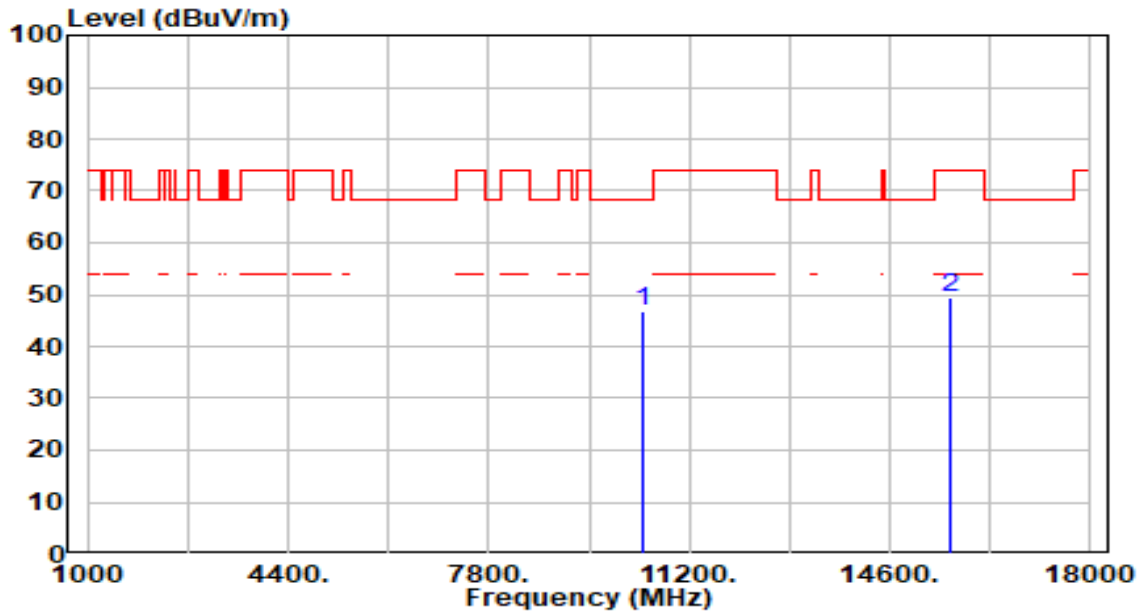


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.03	4.74	46.77	-21.43	68.20	200	200	Peak
2		15630.000	43.08	6.25	49.33	-24.67	74.00	200	233	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

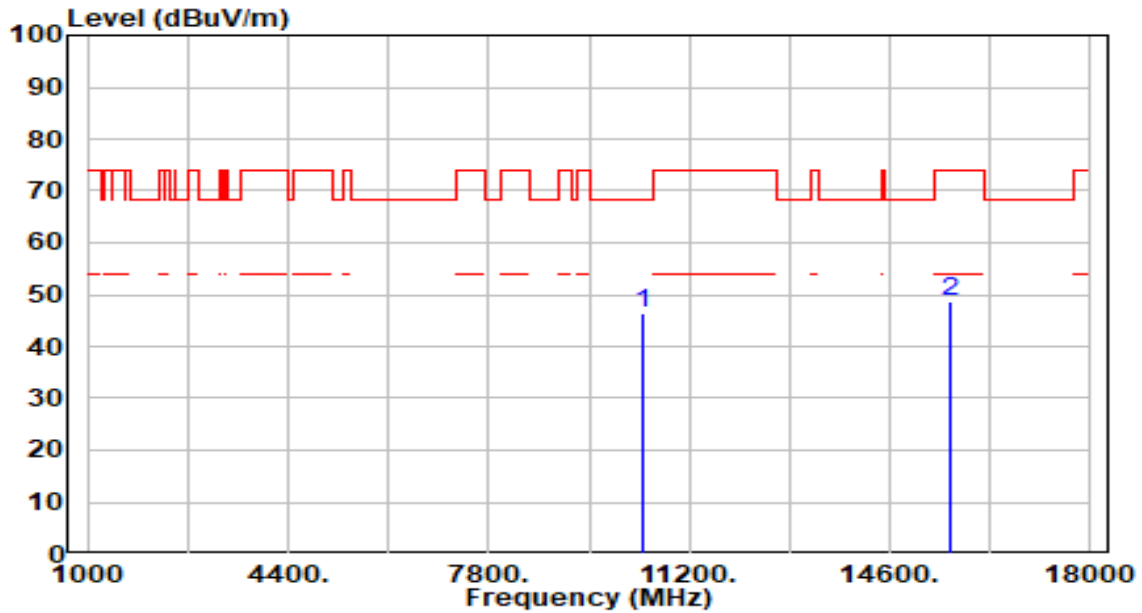


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.57	4.74	46.31	-21.89	68.20	200	78	Peak
2		15630.000	42.55	6.25	48.81	-25.19	74.00	200	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

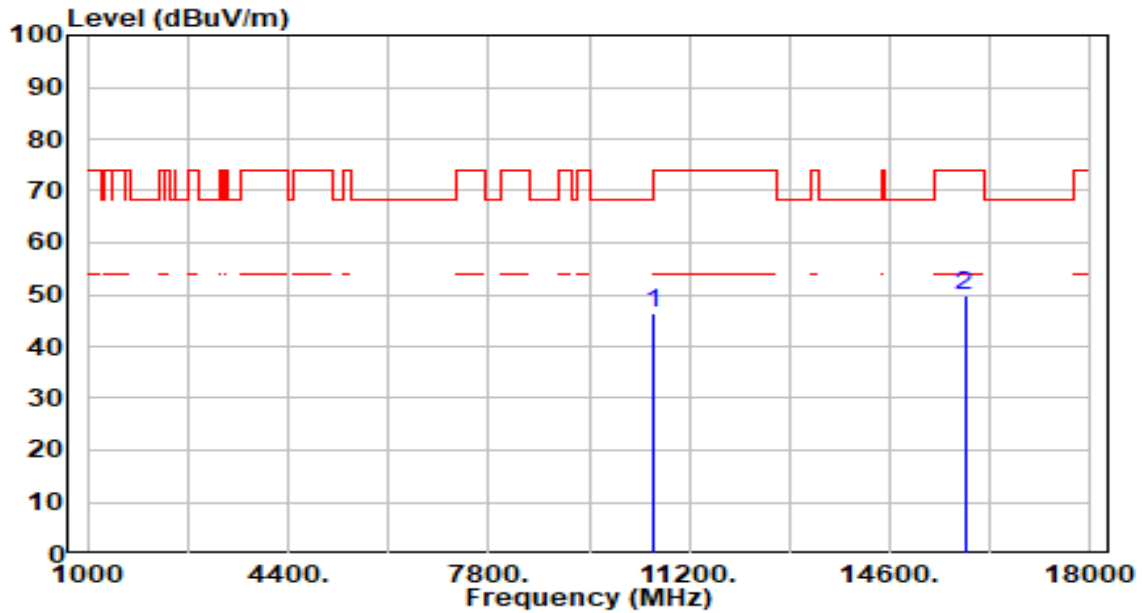


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.72	4.56	46.29	-21.91	68.20	200	15	Peak
2		15870.000	43.31	6.63	49.94	-24.06	74.00	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

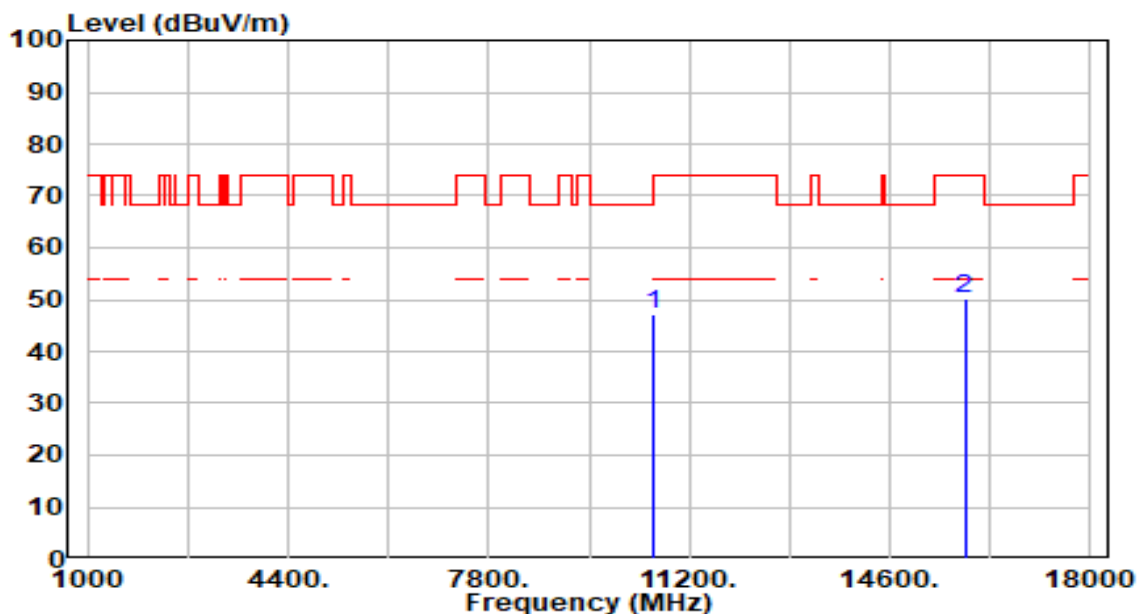


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	42.70	4.56	47.26	-20.94	68.20	200	1	Peak
2		15870.000	43.38	6.63	50.01	-23.99	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

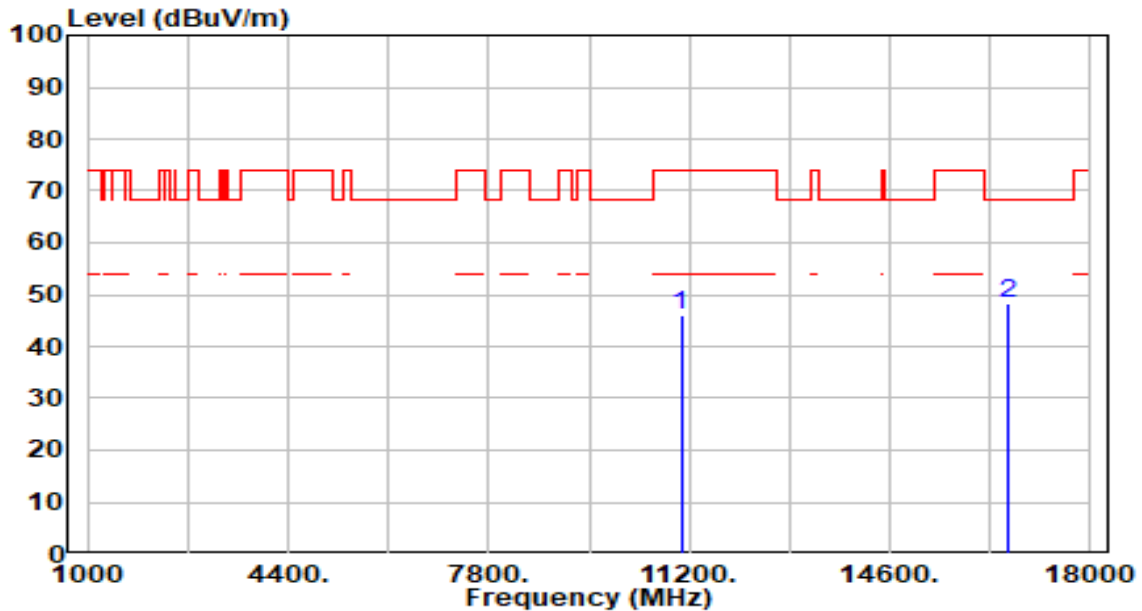


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	41.28	4.60	45.88	-28.12	74.00	200	133	Peak
2	*	16590.000	42.36	6.00	48.36	-19.84	68.20	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

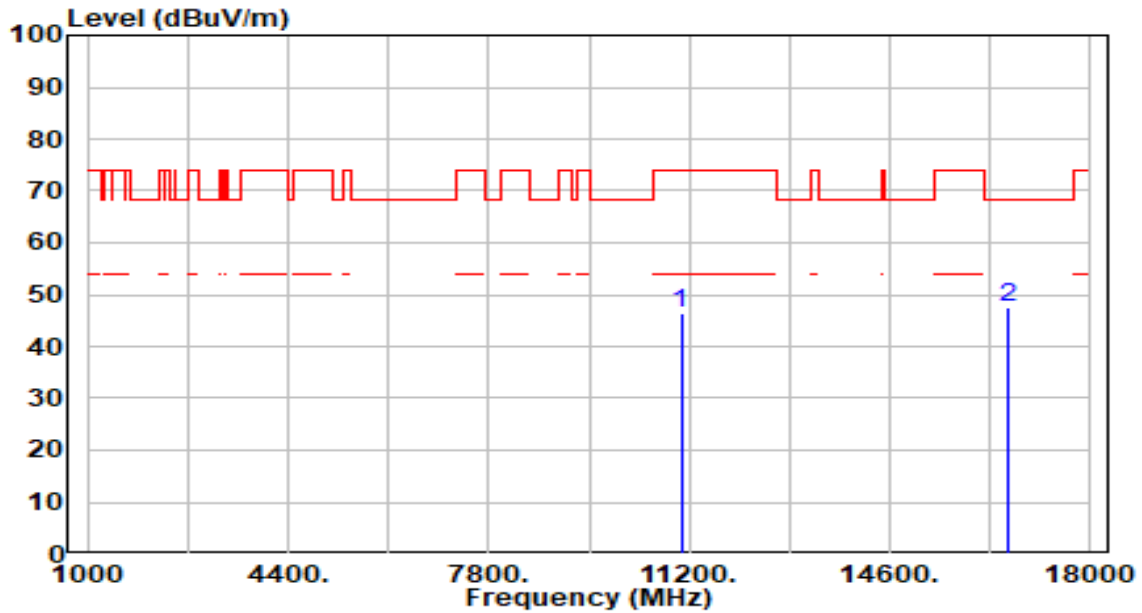


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	41.75	4.60	46.35	-27.65	74.00	200	47	Peak
2	*	16590.000	41.42	6.00	47.42	-20.78	68.20	200	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

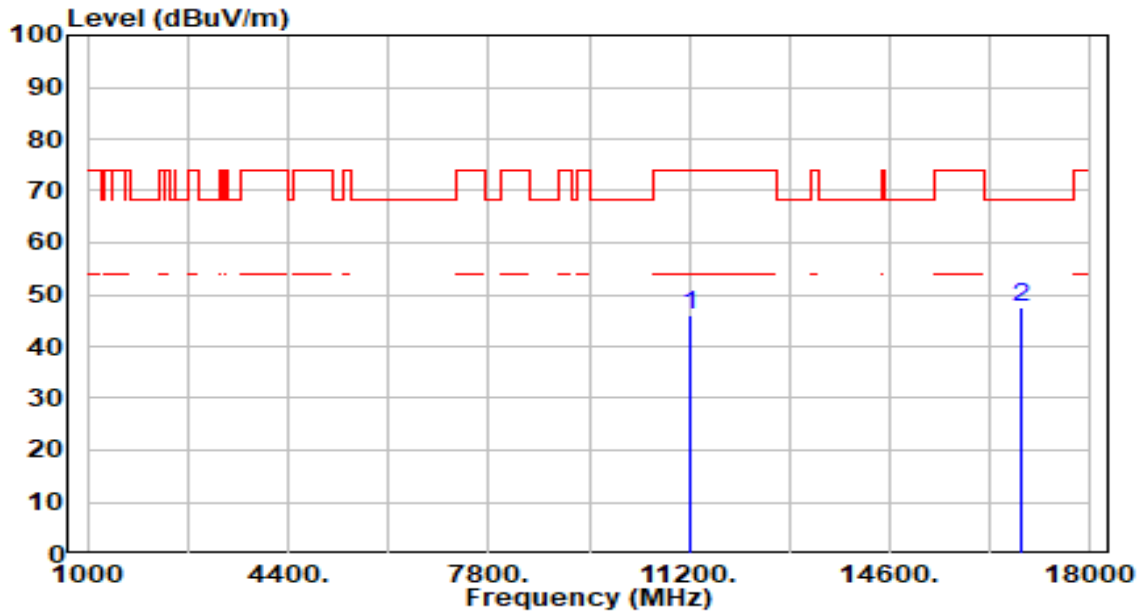


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.03	5.00	46.03	-27.97	74.00	200	91	Peak
2	* 16830.000	41.54	5.98	47.53	-20.67	68.20	200	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

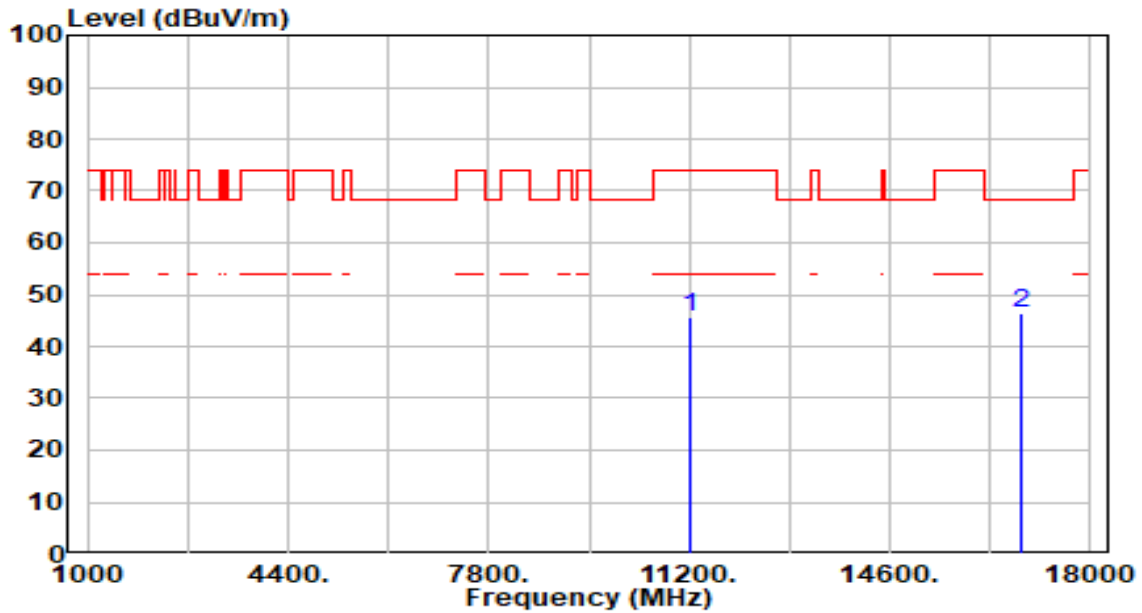


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	40.72	5.00	45.73	-28.27	74.00	200	69	Peak
2	*	16830.000	40.59	5.98	46.57	-21.63	68.20	200	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

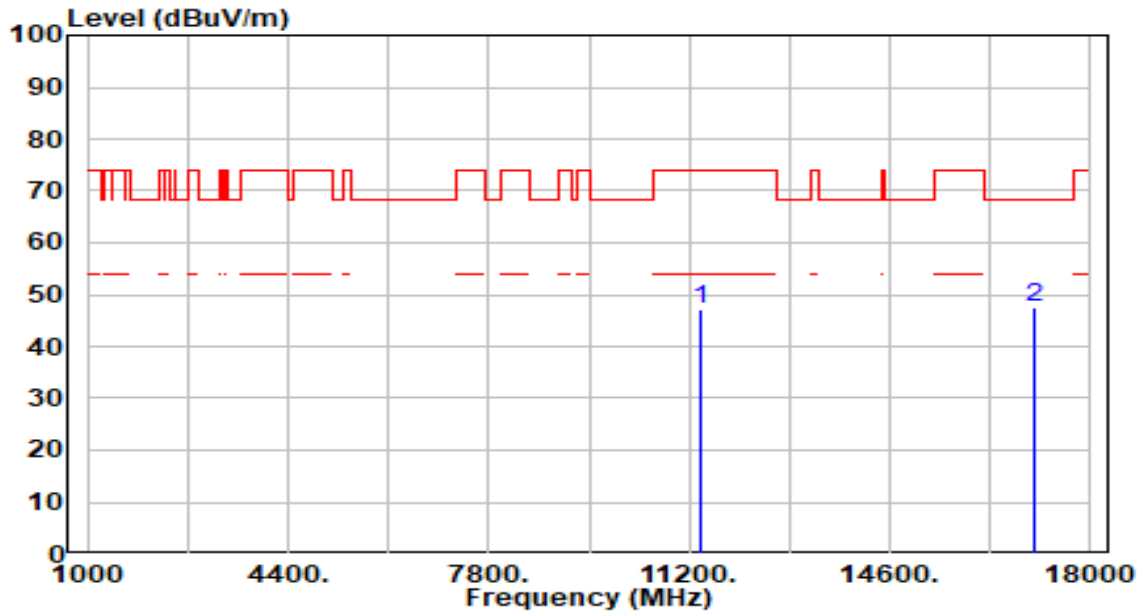


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.94	5.19	47.13	-26.87	74.00	200	15	Peak
2	*	17070.000	41.91	5.61	47.52	-20.68	68.20	200	162	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

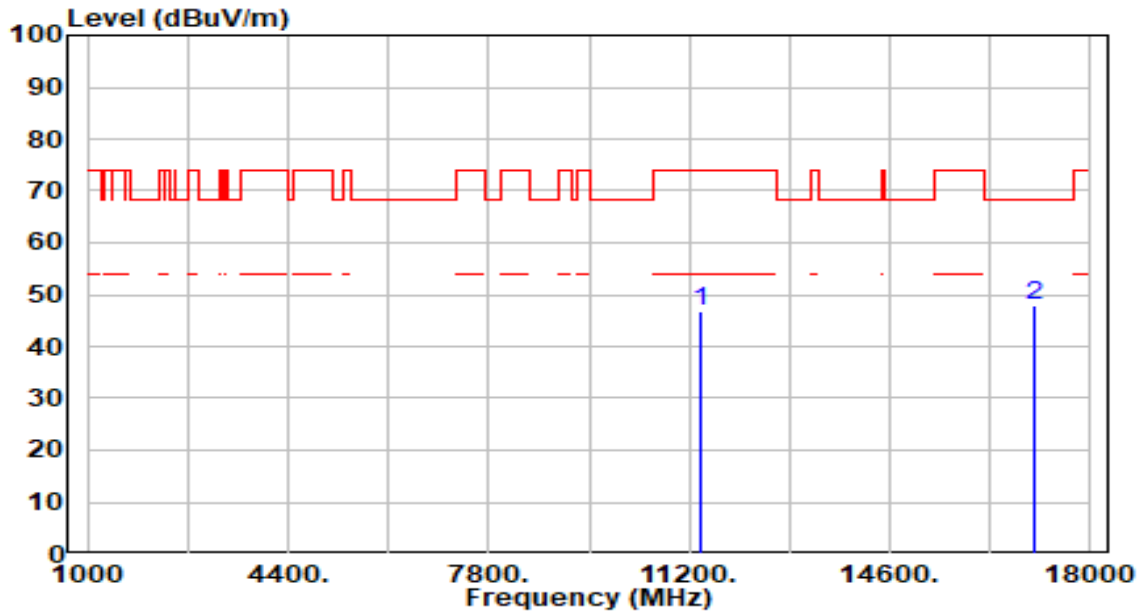


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.53	5.19	46.72	-27.28	74.00	200	91	Peak
2	*	17070.000	42.26	5.61	47.87	-20.33	68.20	200	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

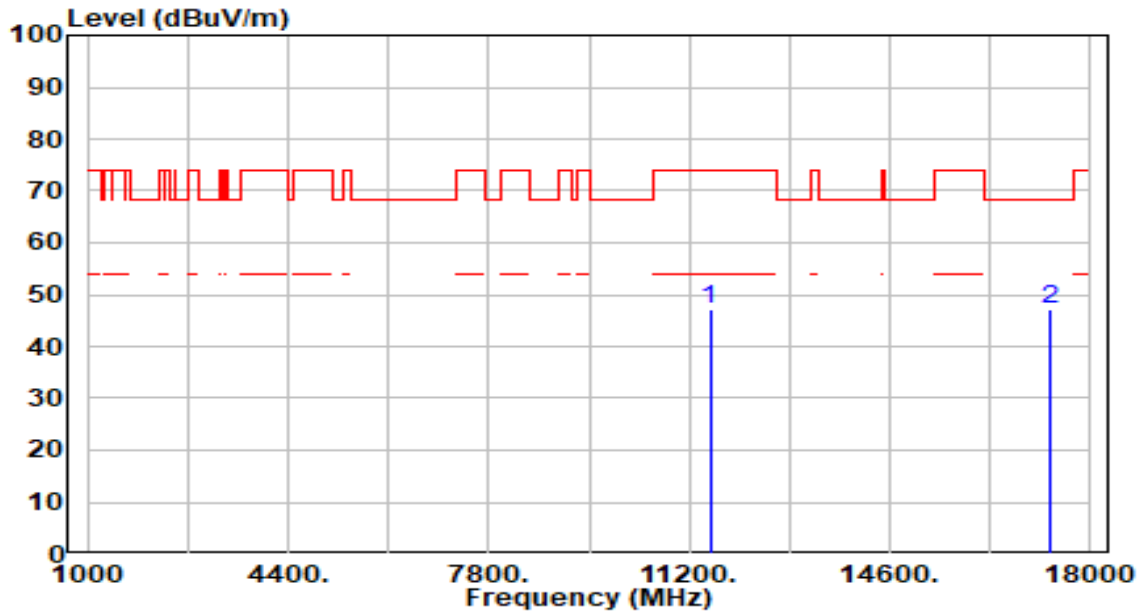


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	41.74	5.33	47.07	-26.93	74.00	200	273	Peak
2	*	17325.000	42.28	5.05	47.33	-20.87	68.20	200	282	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

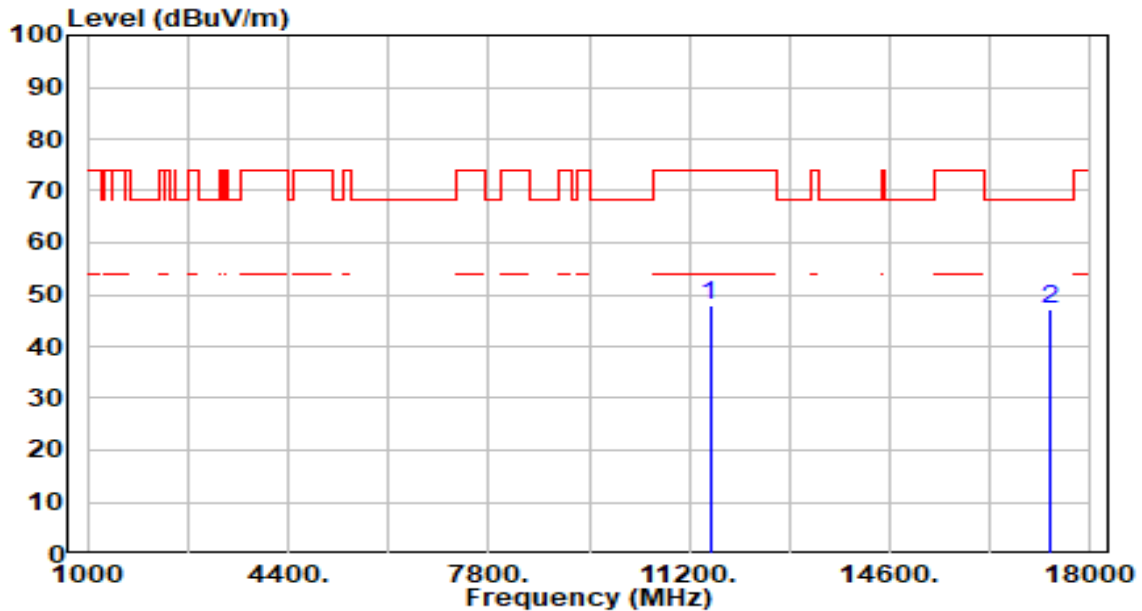


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	42.41	5.33	47.74	-26.26	74.00	200	70	Peak
2	*	17325.000	42.06	5.05	47.11	-21.09	68.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

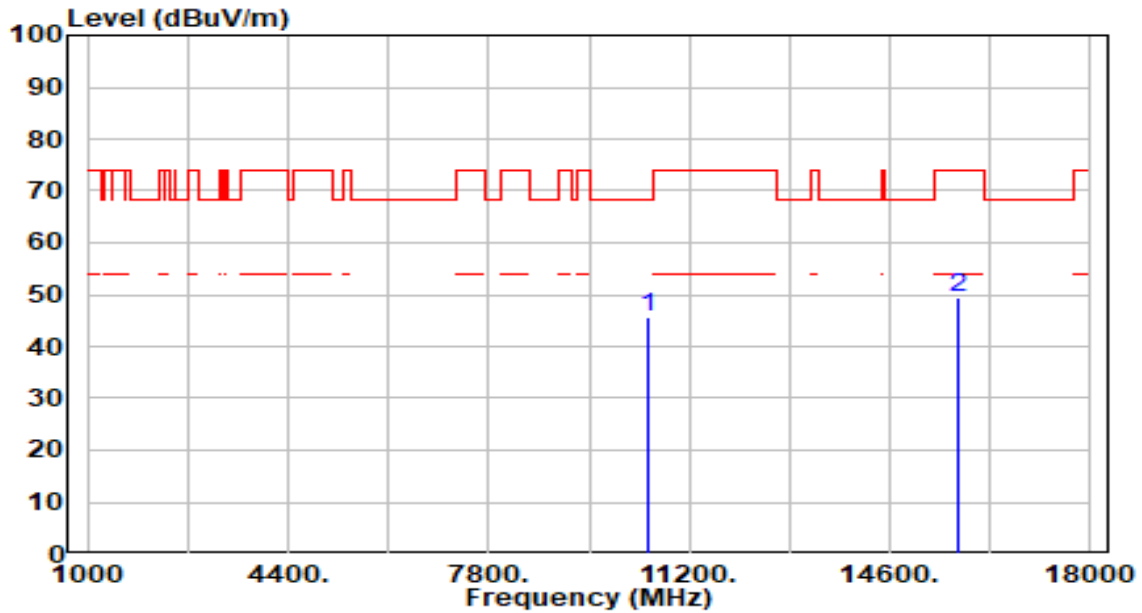


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.98	4.62	45.60	-22.60	68.20	200	32	Peak
2		15750.000	42.84	6.49	49.33	-24.67	74.00	200	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

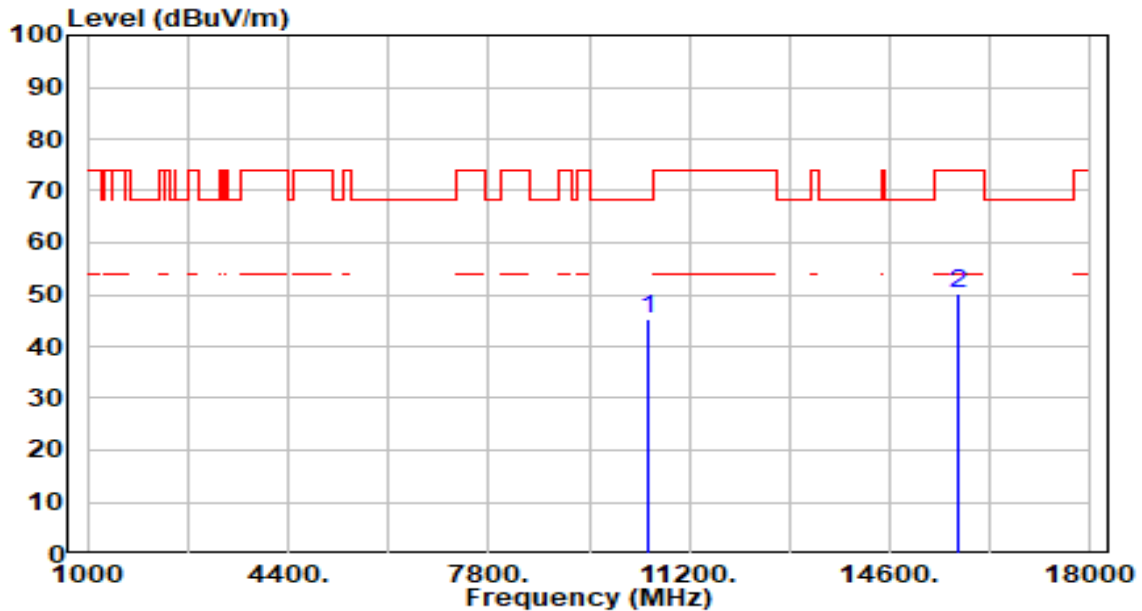


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.55	4.62	45.17	-23.03	68.20	200	158	Peak
2		15750.000	43.64	6.49	50.13	-23.87	74.00	200	146	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

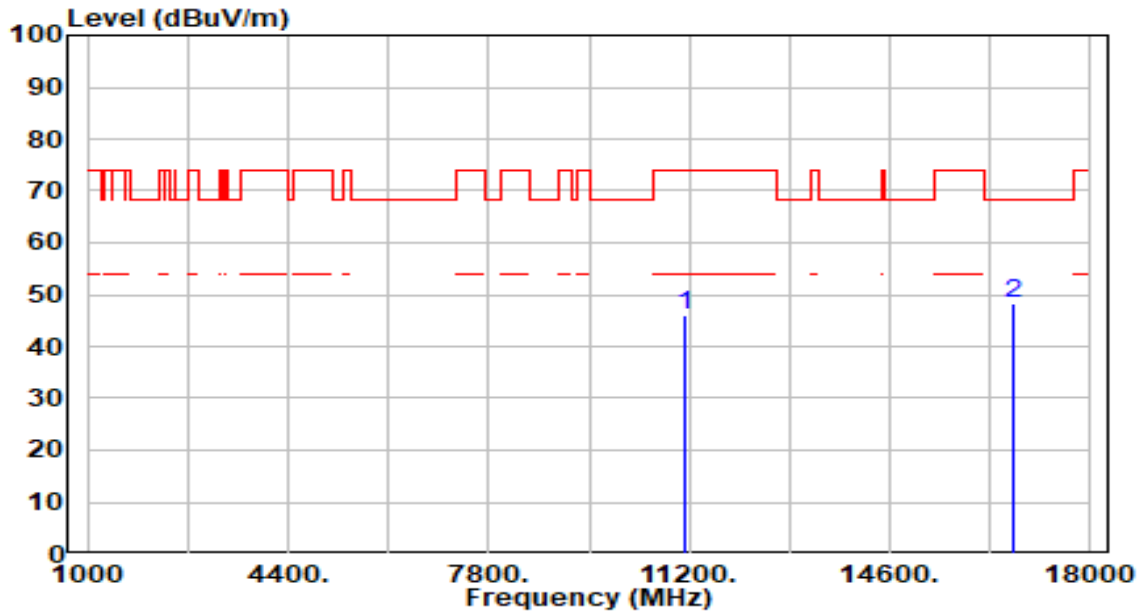


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.11	4.82	45.92	-28.08	74.00	200	92	Peak
2	*	16710.000	42.20	6.01	48.21	-19.99	68.20	200	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

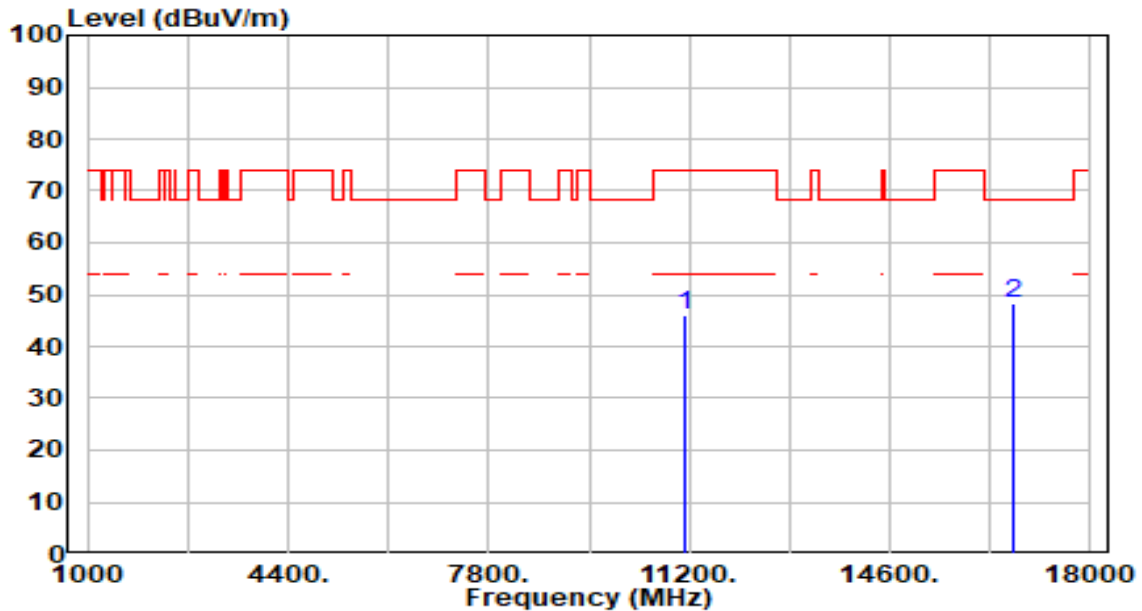


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.20	4.82	46.02	-27.98	74.00	200	0	Peak
2	* 16710.000	42.11	6.01	48.12	-20.08	68.20	200	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

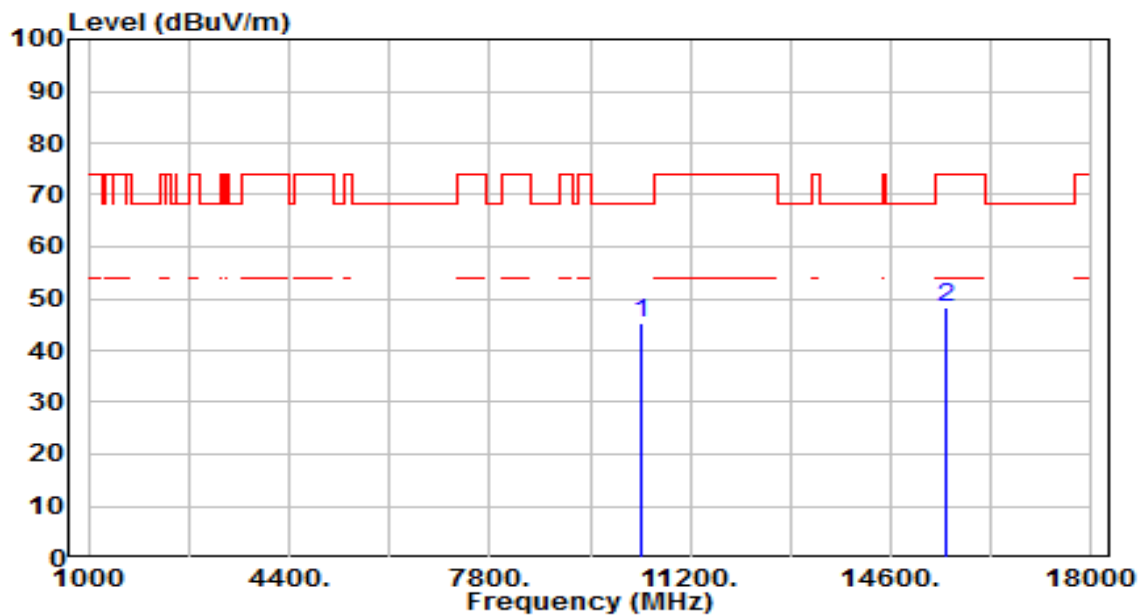


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	40.53	4.81	45.35	-22.85	68.20	290	0	Peak
2		15540.000	42.16	6.28	48.44	-25.56	74.00	203	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

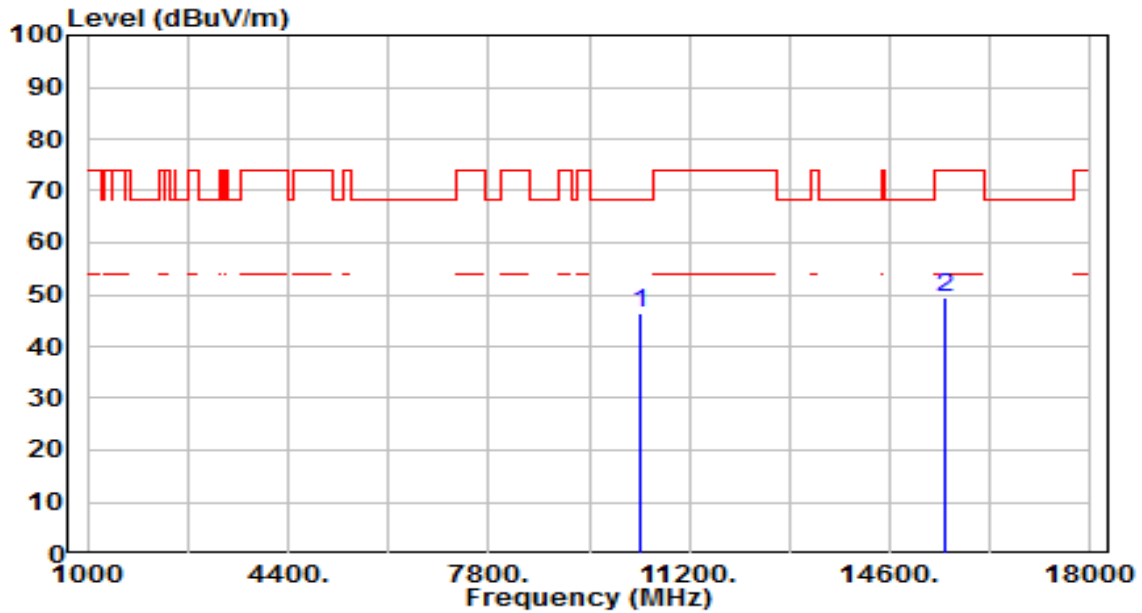


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.65	4.81	46.46	-21.74	68.20	200	172	Peak
2		15540.000	43.15	6.28	49.43	-24.57	74.00	100	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

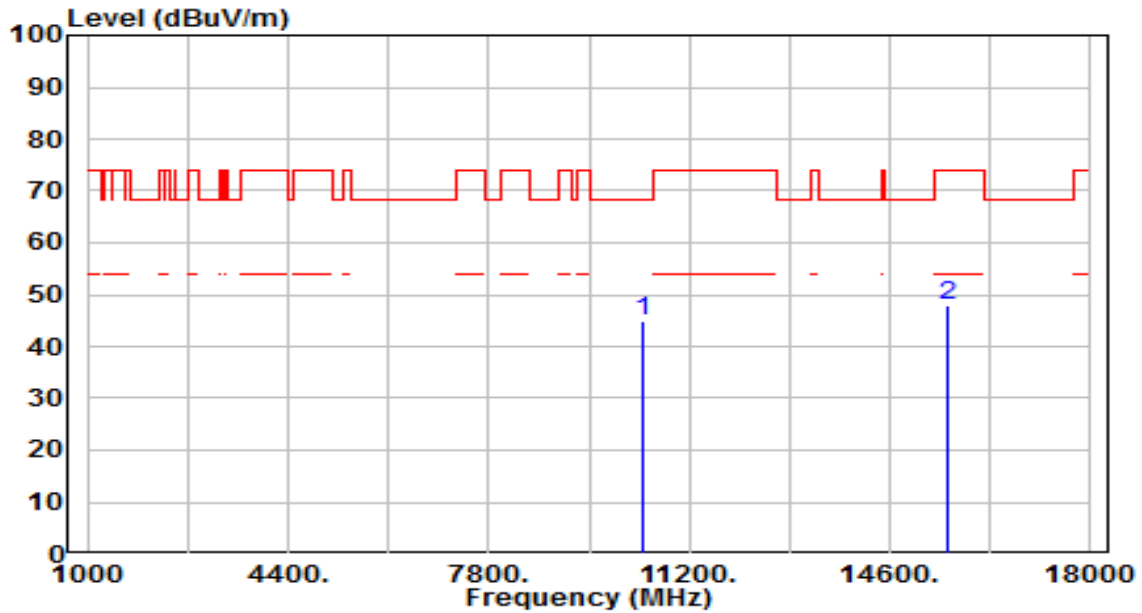


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	40.15	4.77	44.93	-23.27	68.20	300	301	Peak
2		15600.000	41.55	6.19	47.74	-26.26	74.00	200	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

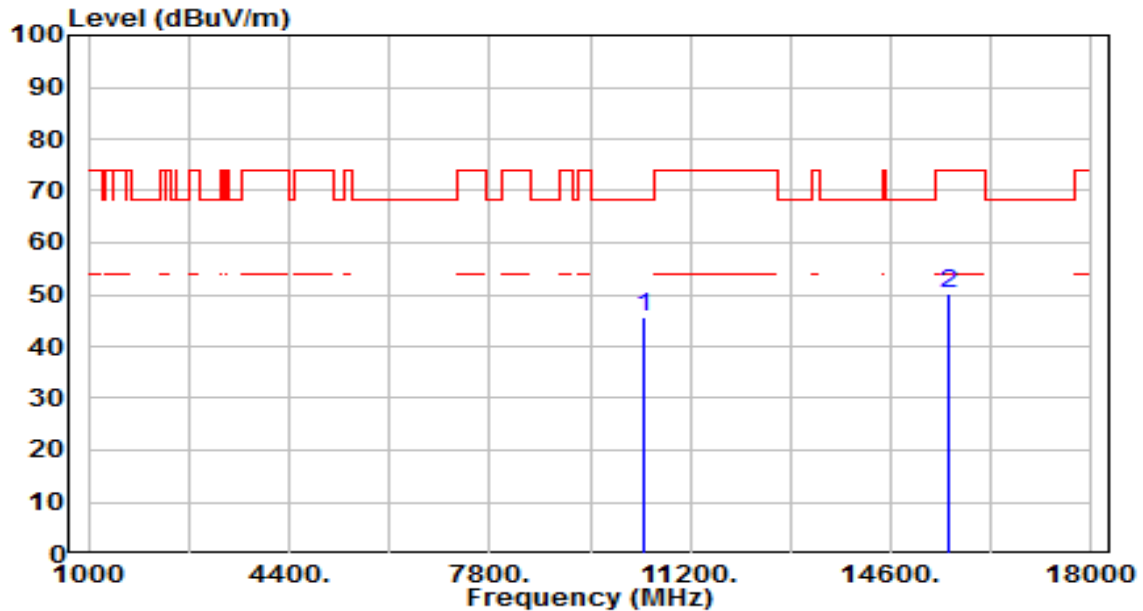


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	40.72	4.77	45.49	-22.71	68.20	200	360	Peak
2		15600.000	43.90	6.19	50.09	-23.91	74.00	100	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

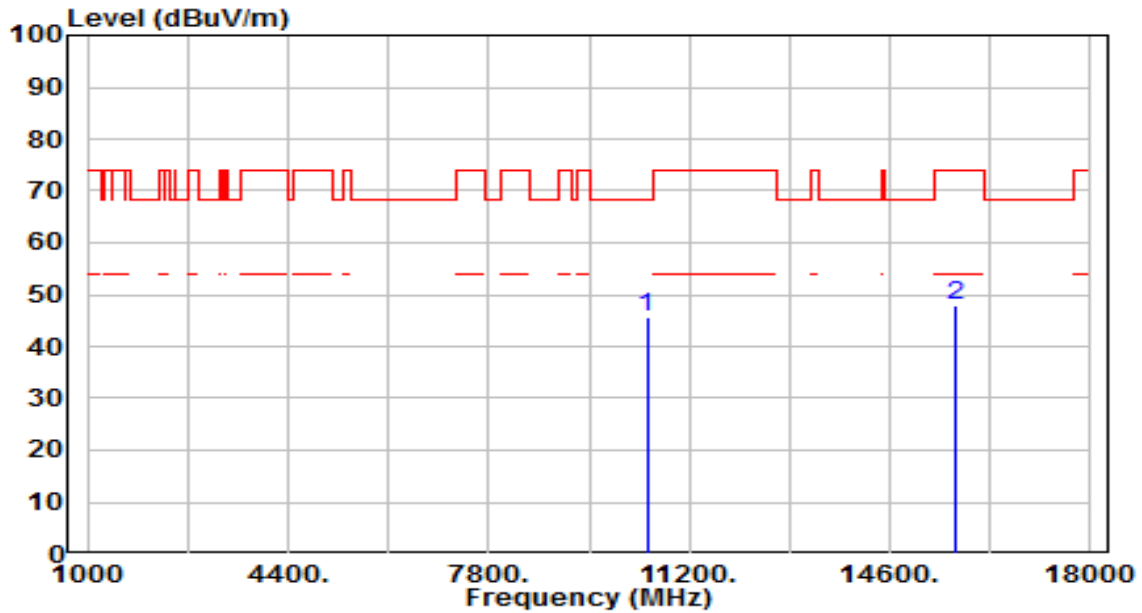


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.01	4.65	45.67	-22.53	68.20	300	251	Peak
2		15720.000	41.48	6.43	47.92	-26.08	74.00	100	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

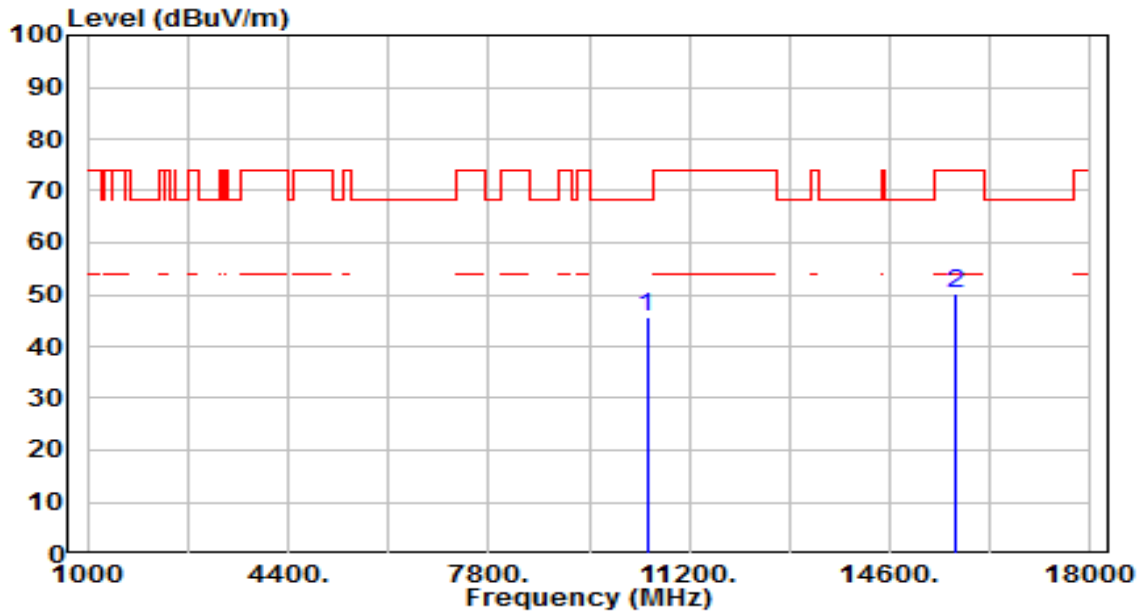


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	40.91	4.65	45.57	-22.63	68.20	100	202	Peak
2		15720.000	43.61	6.43	50.05	-23.95	74.00	100	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

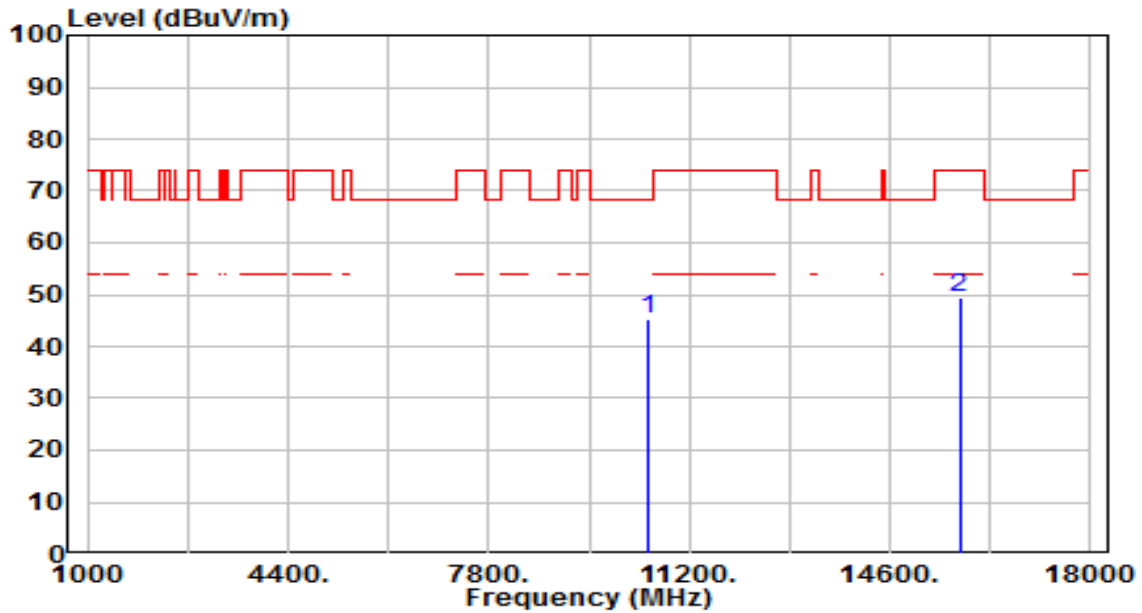


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	40.65	4.61	45.26	-22.94	68.20	300	70	Peak
2		15780.000	42.92	6.55	49.47	-24.53	74.00	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

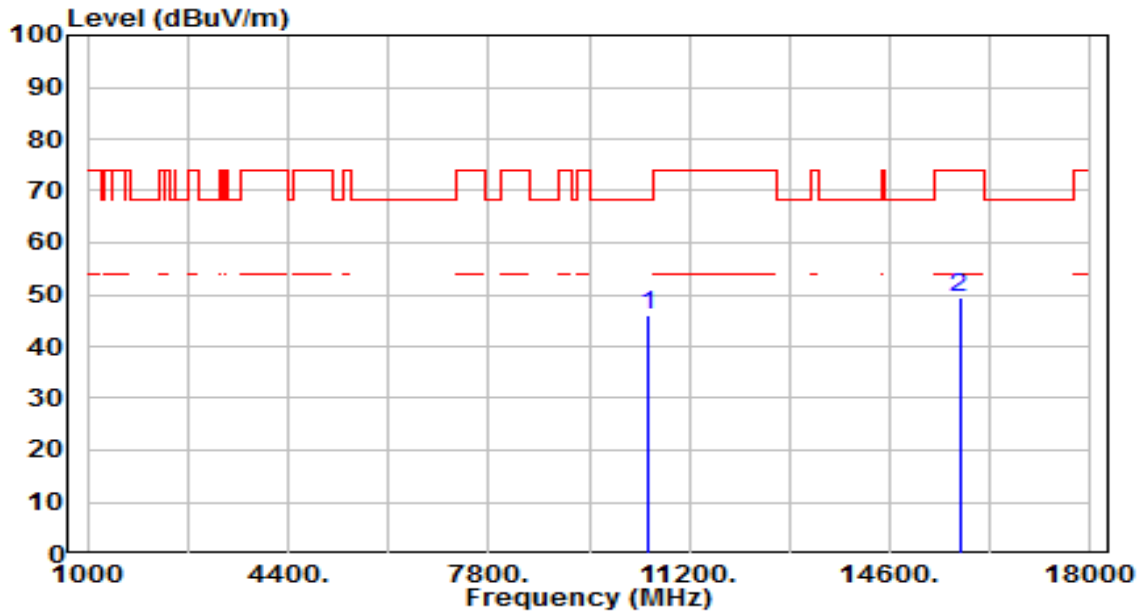


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.41	4.61	46.02	-22.18	68.20	100	134	Peak
2		15780.000	42.91	6.55	49.46	-24.54	74.00	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

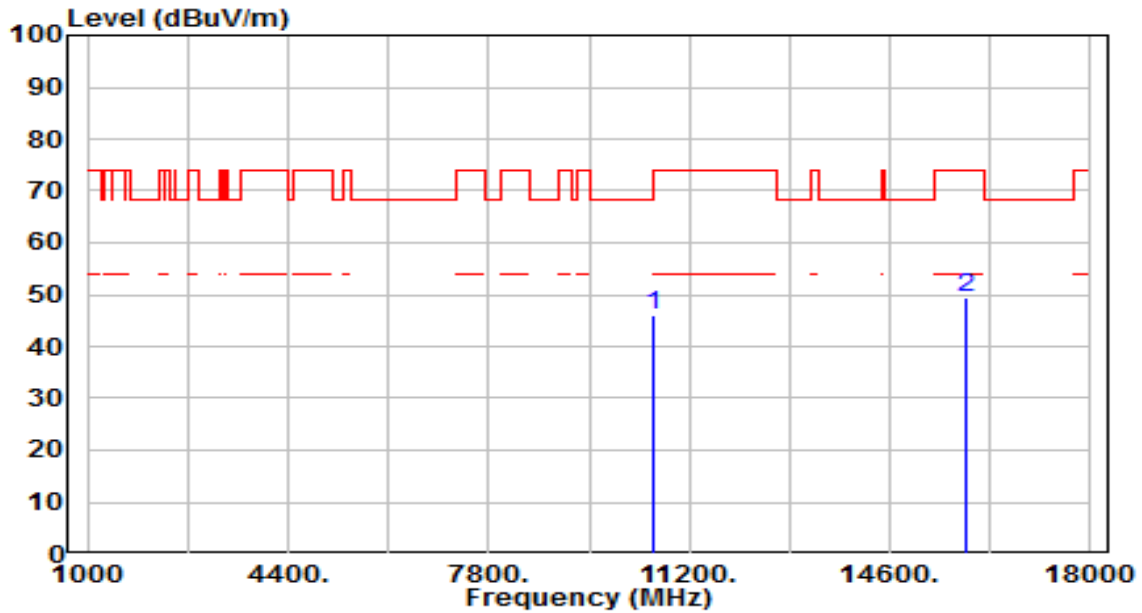


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.54	4.55	46.09	-22.11	68.20	200	0	Peak
2		15900.000	42.69	6.64	49.33	-24.67	74.00	100	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

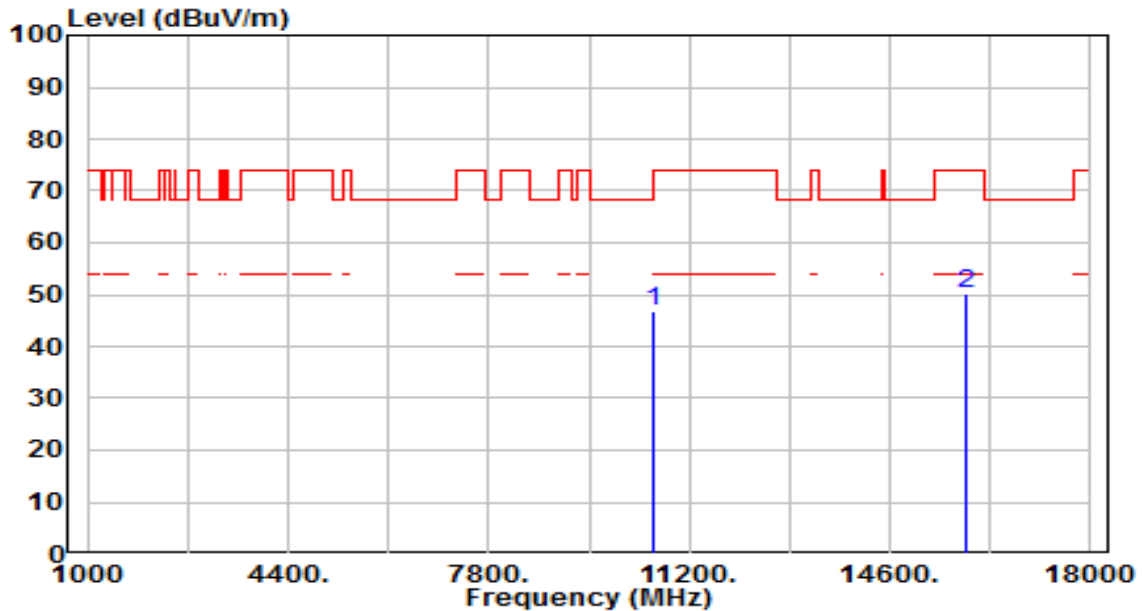


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.35	4.55	46.90	-21.30	68.20	100	0	Peak
2		15900.000	43.46	6.64	50.10	-23.90	74.00	115	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

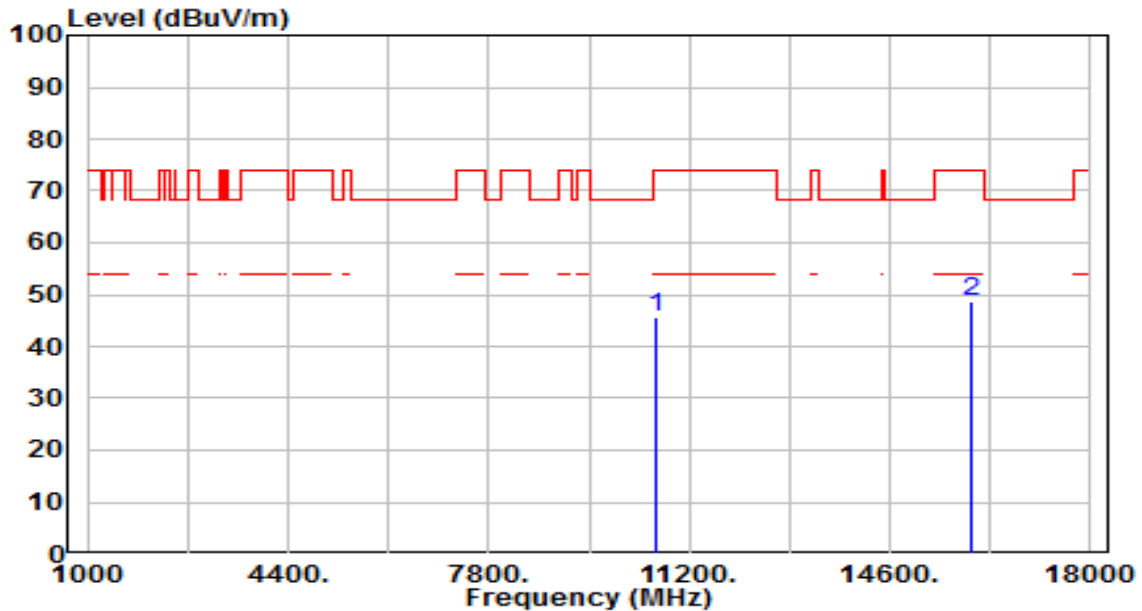


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	40.96	4.58	45.54	-28.46	74.00	300	307	Peak
2	*	15960.000	42.10	6.67	48.77	-25.23	74.00	100	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

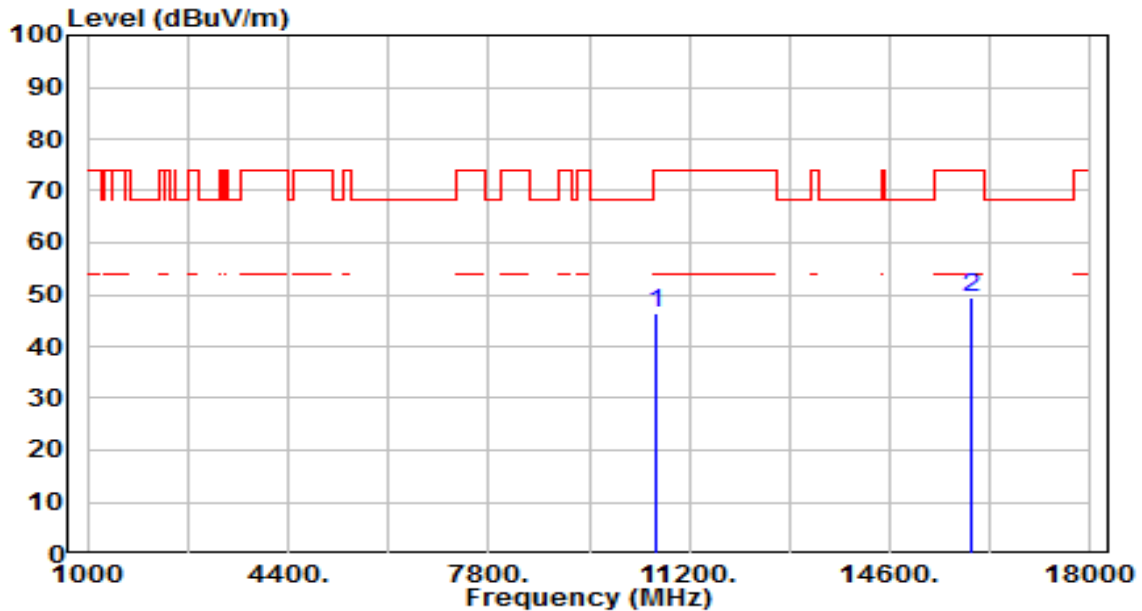


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.72	4.58	46.30	-27.70	74.00	100	196	Peak
2	* 15960.000	42.83	6.67	49.50	-24.50	74.00	100	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

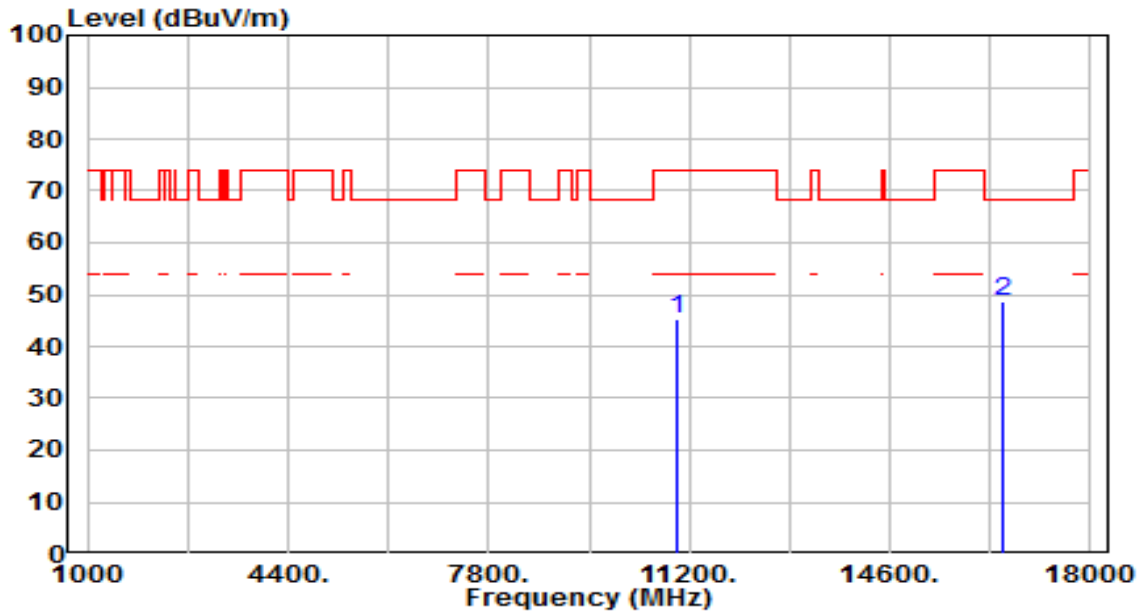


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	40.78	4.44	45.22	-28.78	74.00	100	26	Peak
2	* 16500.000	42.69	6.07	48.76	-19.44	68.20	100	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

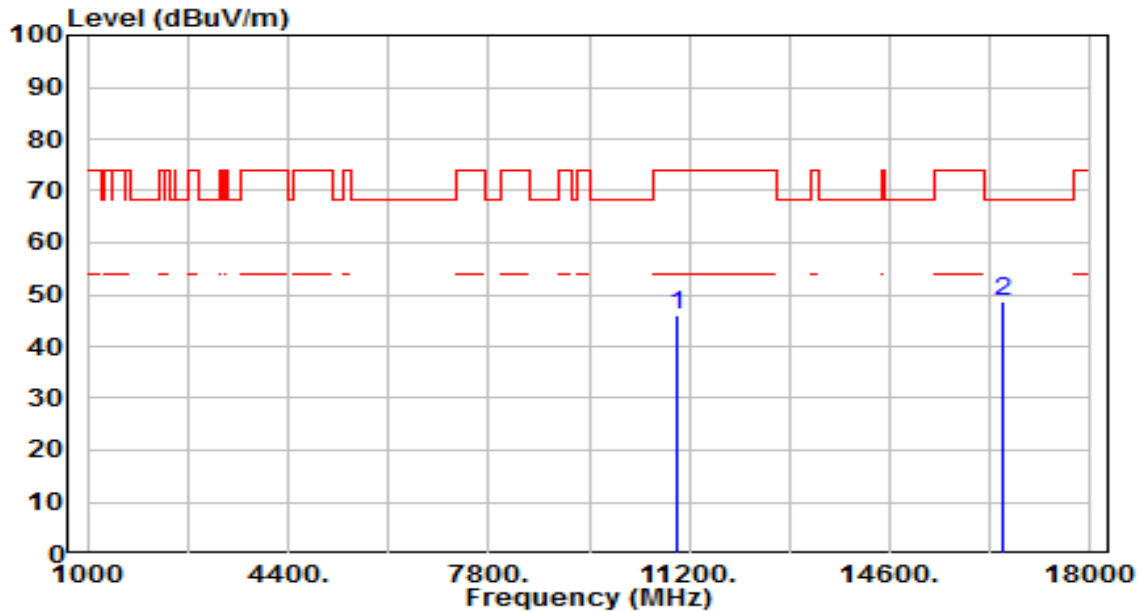


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.59	4.44	46.03	-27.97	74.00	100	0	Peak
2	* 16500.000	42.44	6.07	48.51	-19.69	68.20	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

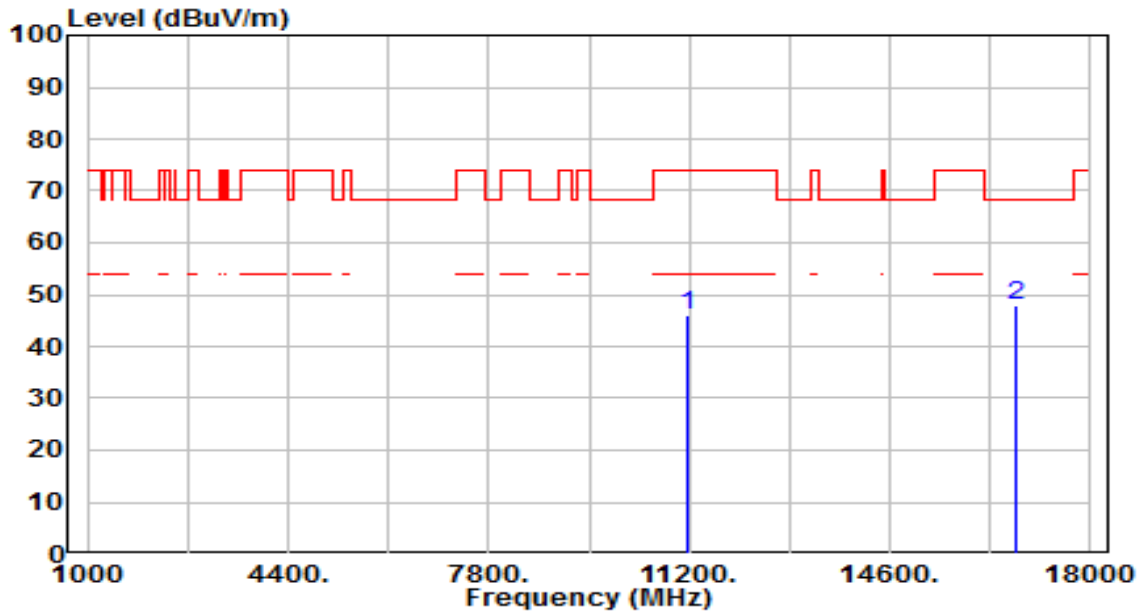


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.11	4.87	45.98	-28.02	74.00	100	0	Peak
2	*	16740.000	41.99	6.01	48.01	-20.19	68.20	200	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

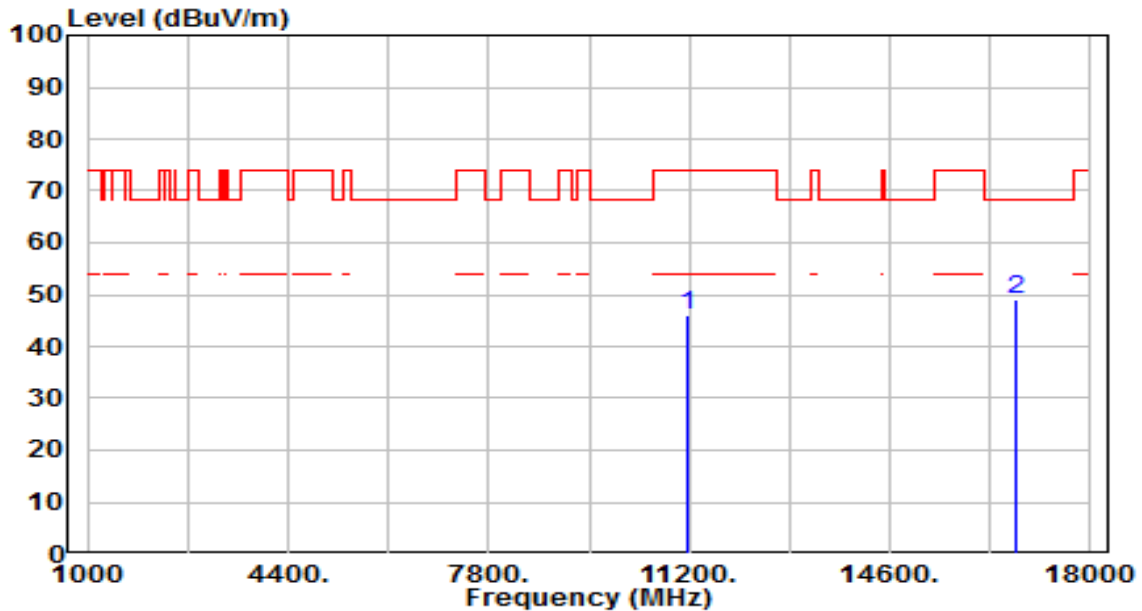


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.24	4.87	46.11	-27.89	74.00	100	357	Peak
2	*	16740.000	42.95	6.01	48.96	-19.24	68.20	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

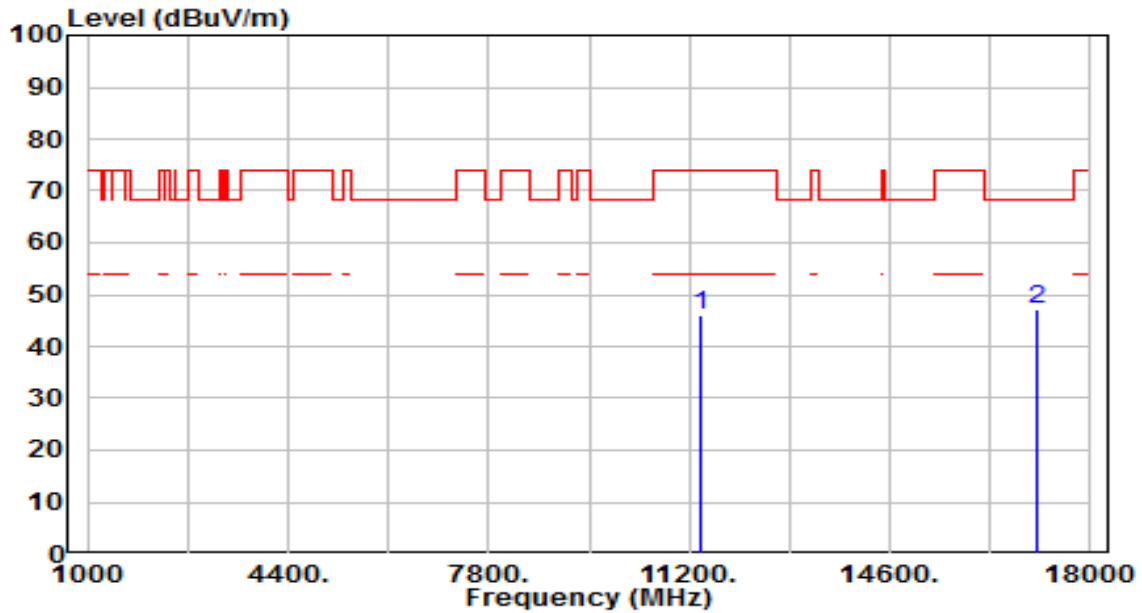


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	40.73	5.22	45.94	-28.06	74.00	100	35	Peak
2	*	17100.000	41.59	5.54	47.13	-21.07	68.20	200	129	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

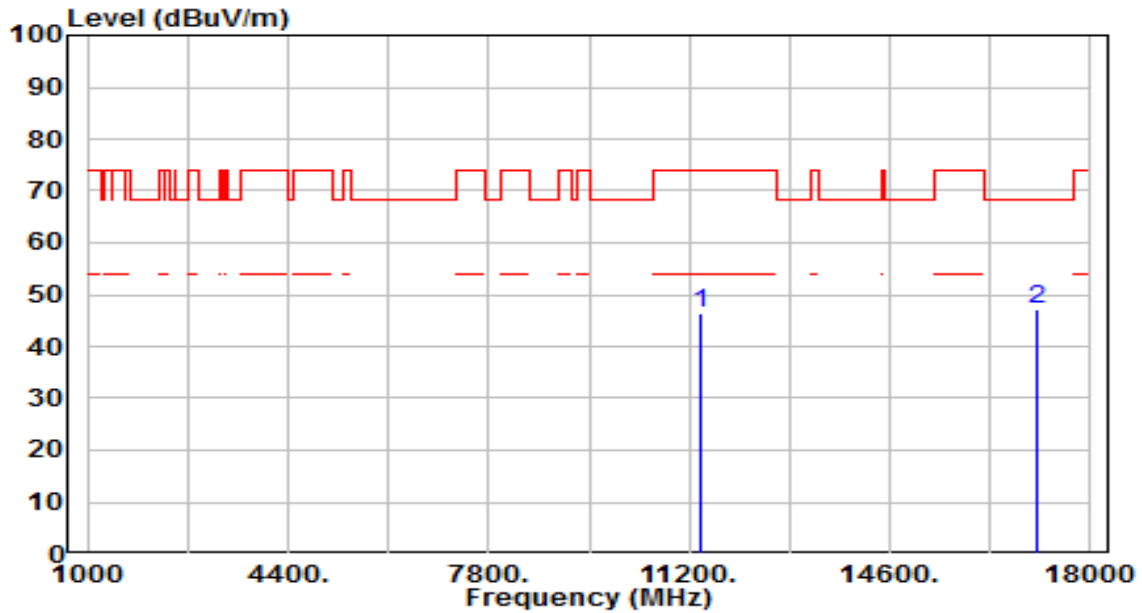


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.30	5.22	46.51	-27.49	74.00	100	254	Peak
2	*	17100.000	41.67	5.54	47.22	-20.98	68.20	200	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

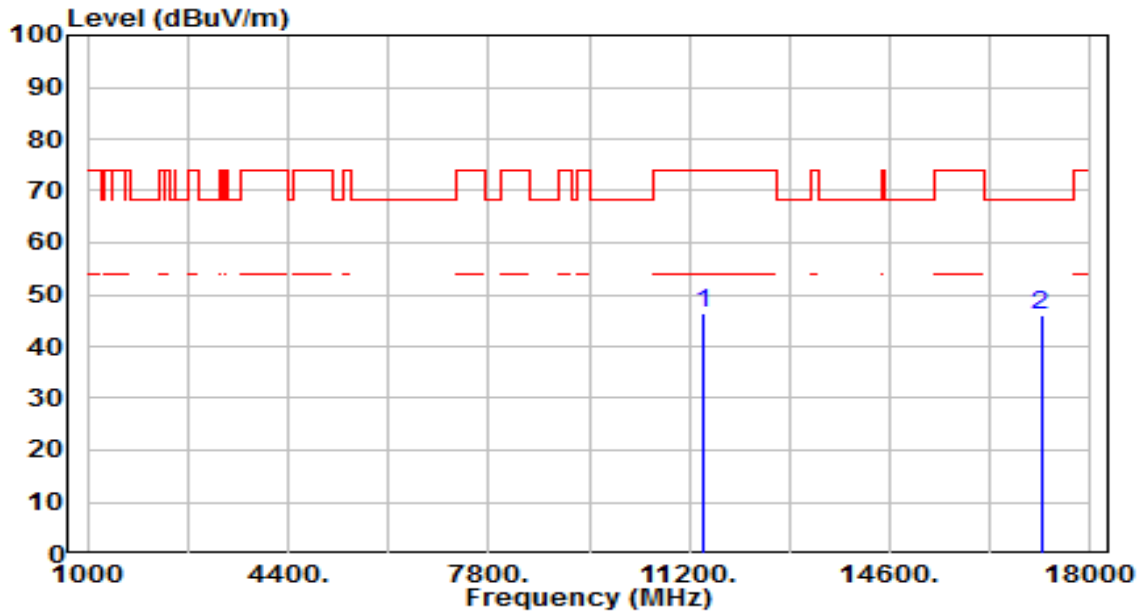


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.27	5.24	46.52	-27.48	74.00	300	360	Peak
2	*	17160.000	40.78	5.41	46.19	-22.01	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

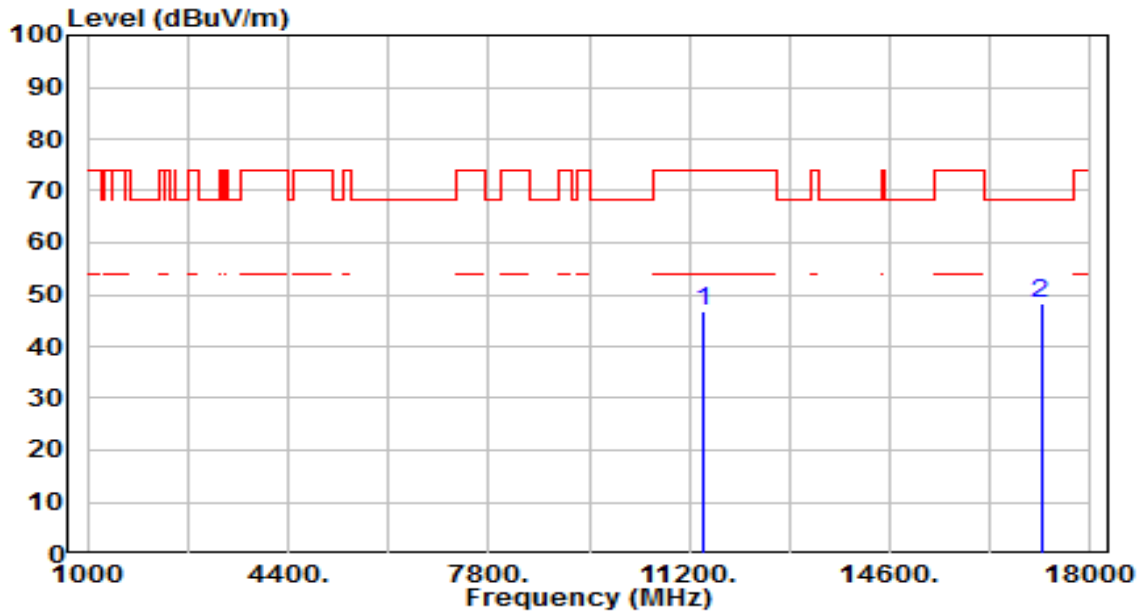


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.68	5.24	46.93	-27.07	74.00	100	184	Peak
2	*	17160.000	42.80	5.41	48.21	-19.99	68.20	100	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

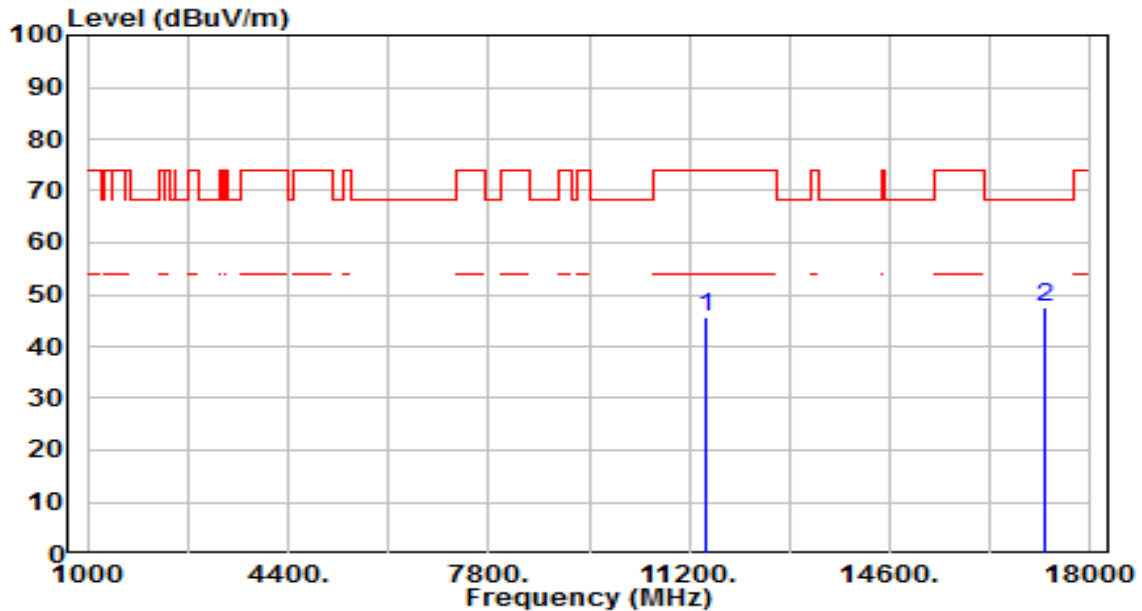


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	40.35	5.28	45.63	-28.37	74.00	200	9	Peak
2	*	17235.000	42.37	5.25	47.61	-20.59	68.20	200	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

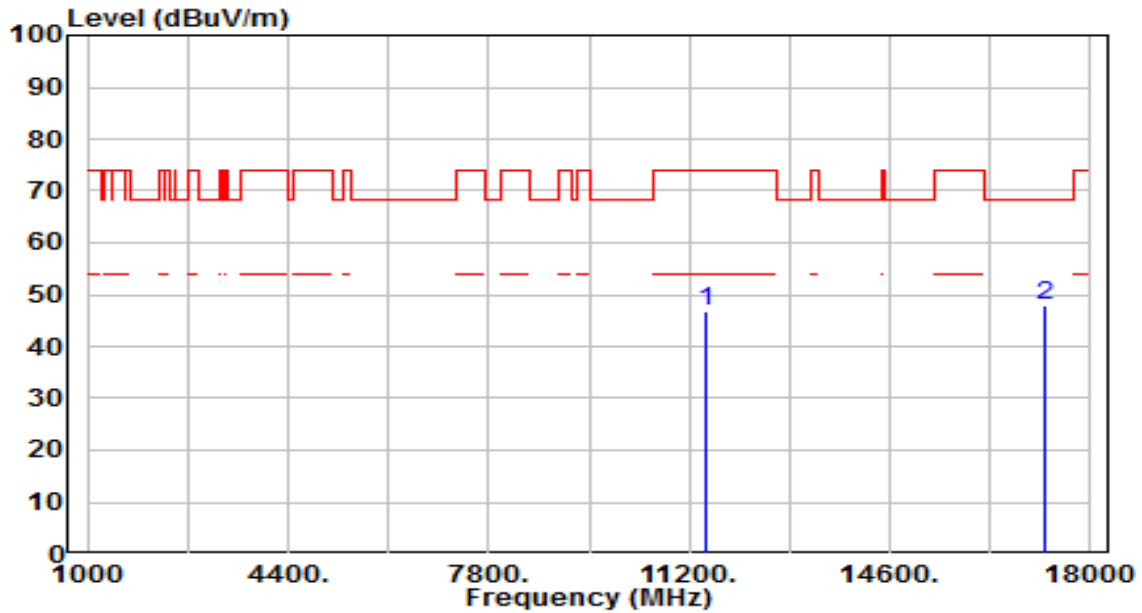


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.63	5.28	46.91	-27.09	74.00	100	295	Peak
2	*	17235.000	42.84	5.25	48.09	-20.11	68.20	117	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

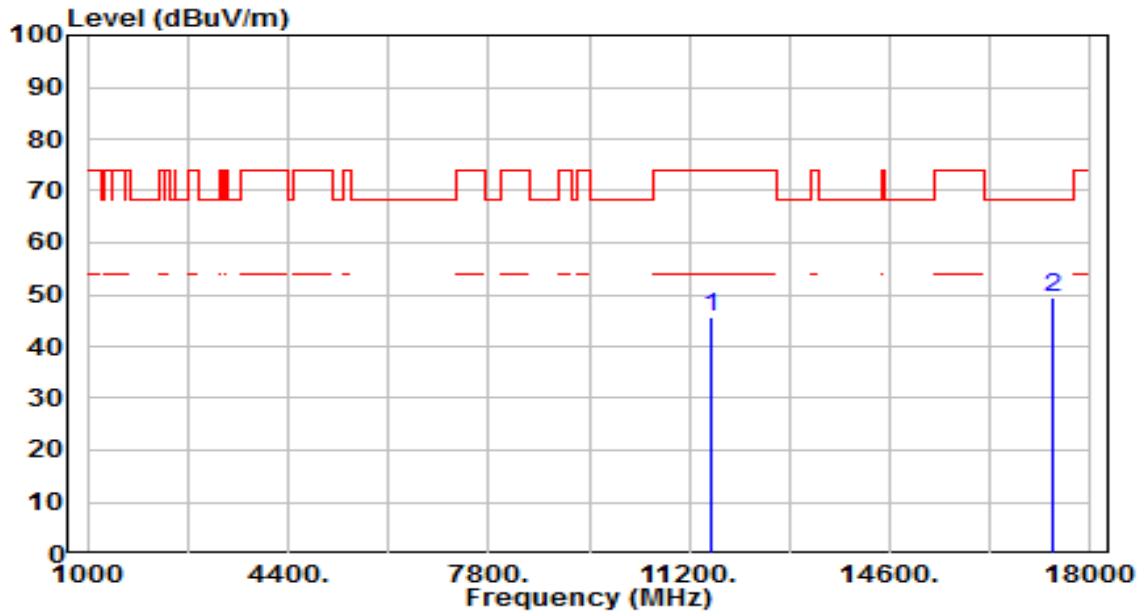


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	40.35	5.35	45.70	-28.30	74.00	100	64	Peak
2	*	17355.000	44.28	4.99	49.27	-18.93	68.20	200	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

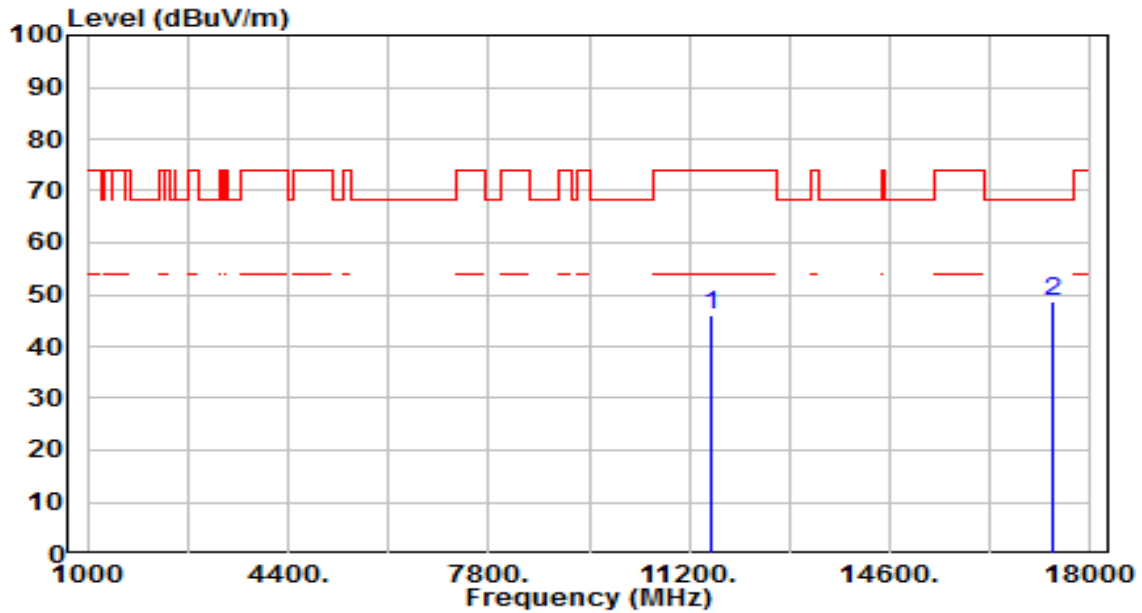


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	40.86	5.35	46.21	-27.79	74.00	150	360	Peak
2	*	17355.000	43.74	4.99	48.73	-19.47	68.20	100	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

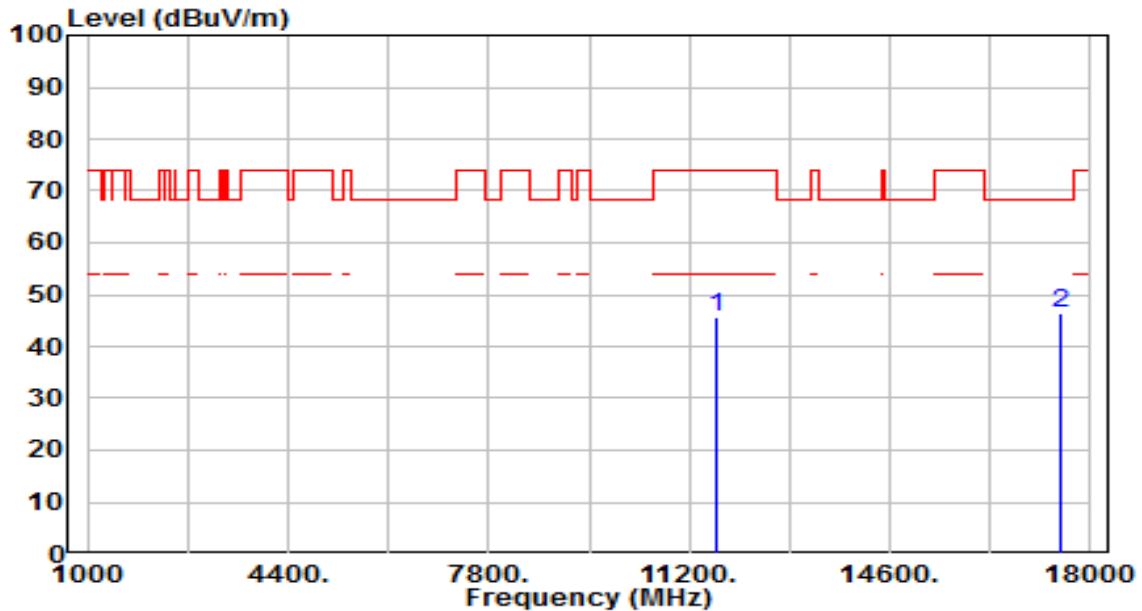


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	40.19	5.37	45.56	-28.44	74.00	200	152	Peak
2	*	17475.000	41.22	5.02	46.25	-21.95	68.20	300	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

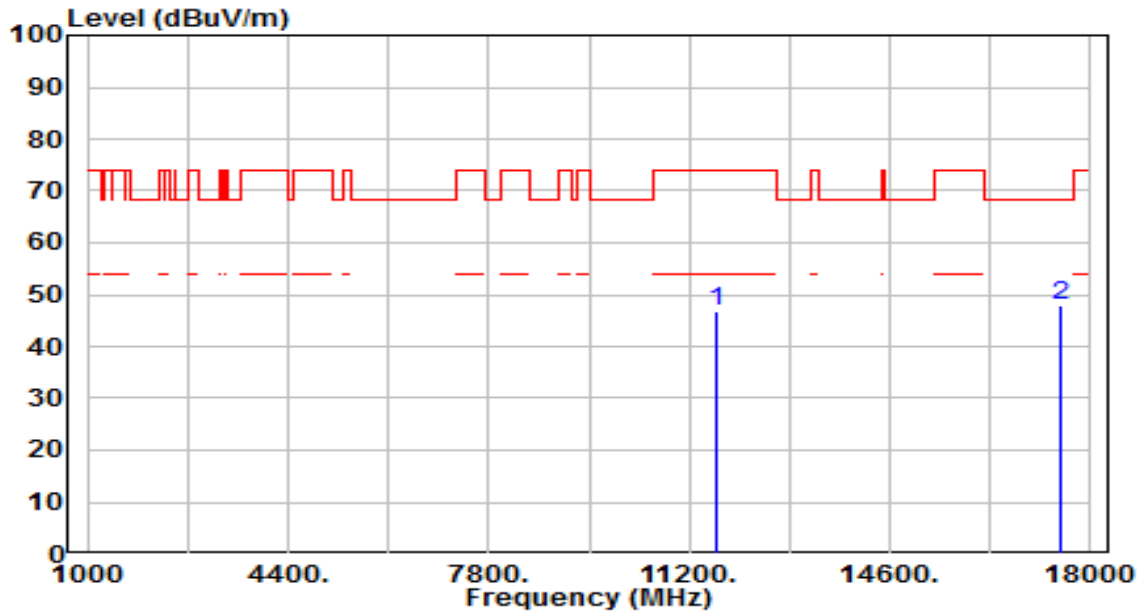


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.36	5.37	46.73	-27.27	74.00	100	0	Peak
2	*	17475.000	42.72	5.02	47.74	-20.46	68.20	100	96	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

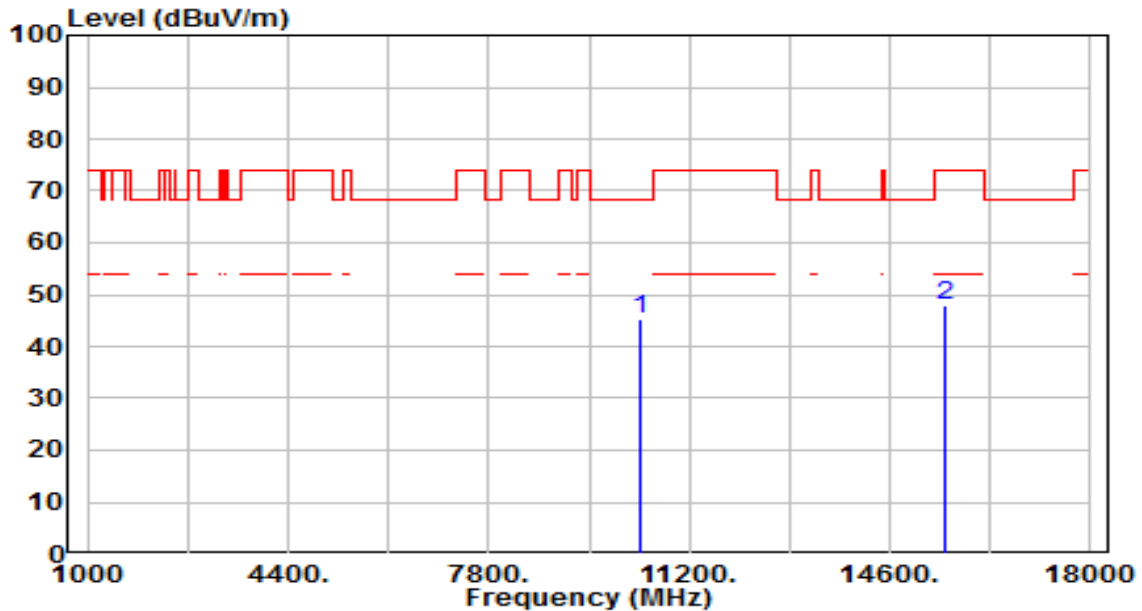


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	40.29	4.81	45.10	-23.10	68.20	200	334	Peak
2		15540.000	41.68	6.28	47.96	-26.04	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

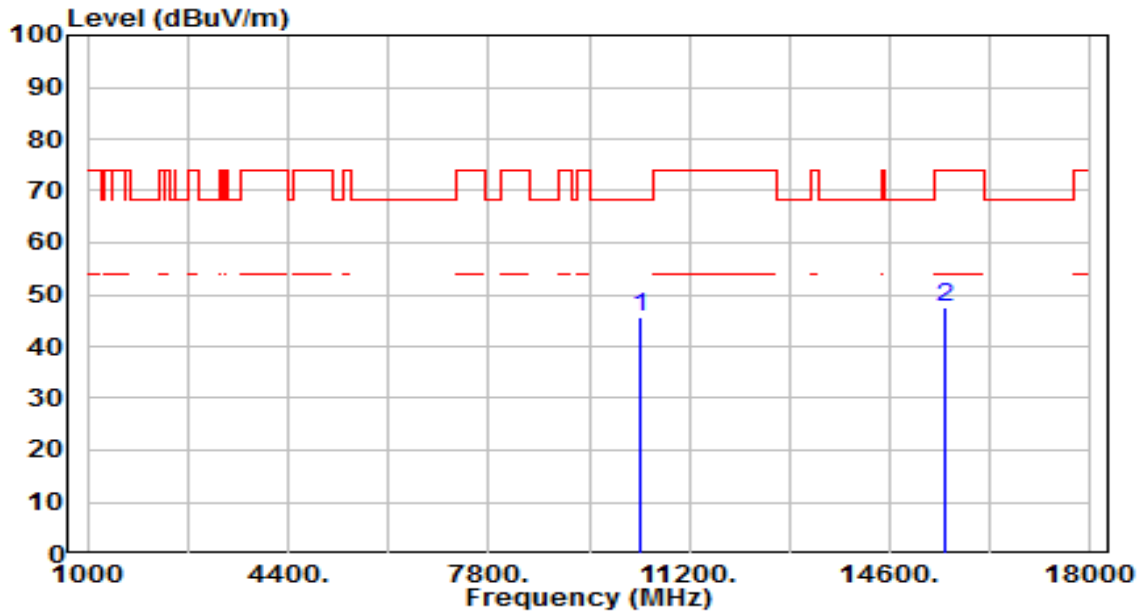


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	40.79	4.81	45.61	-22.59	68.20	200	69	Peak
2		15540.000	41.21	6.28	47.50	-26.50	74.00	200	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

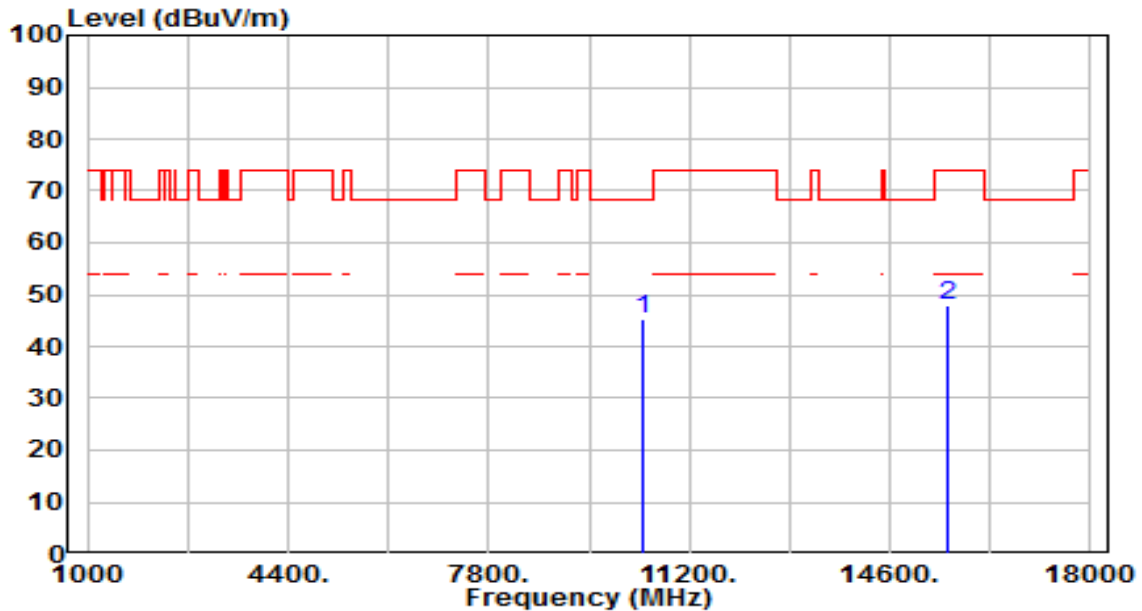


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	40.36	4.77	45.13	-23.07	68.20	200	192	Peak
2		15600.000	41.91	6.19	48.11	-25.89	74.00	200	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

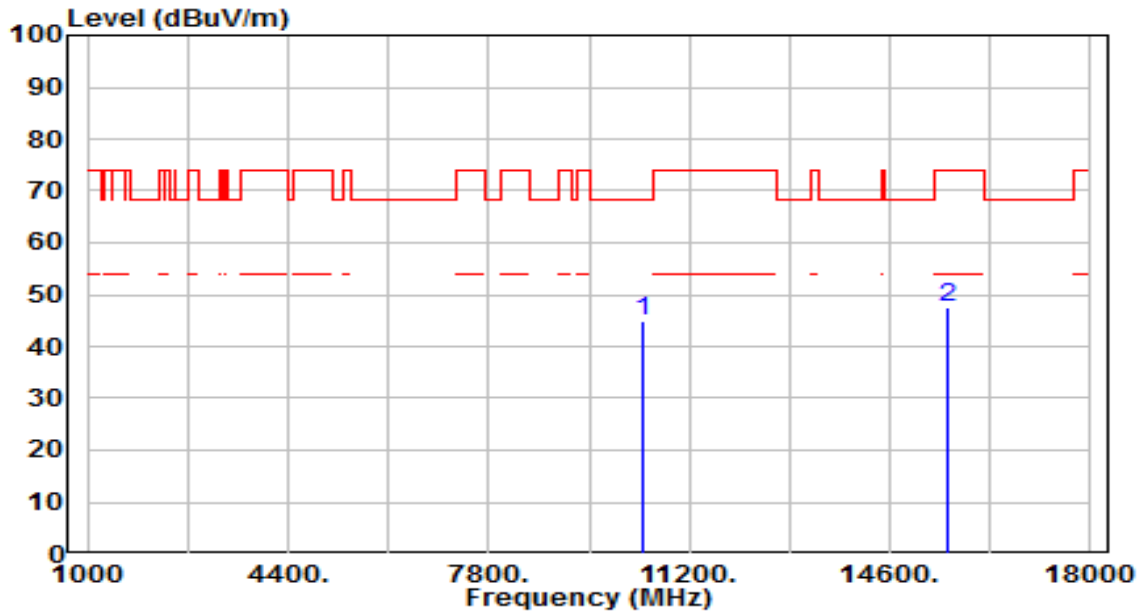


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	40.03	4.77	44.81	-23.39	68.20	200	29	Peak
2		15600.000	41.25	6.19	47.44	-26.56	74.00	200	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

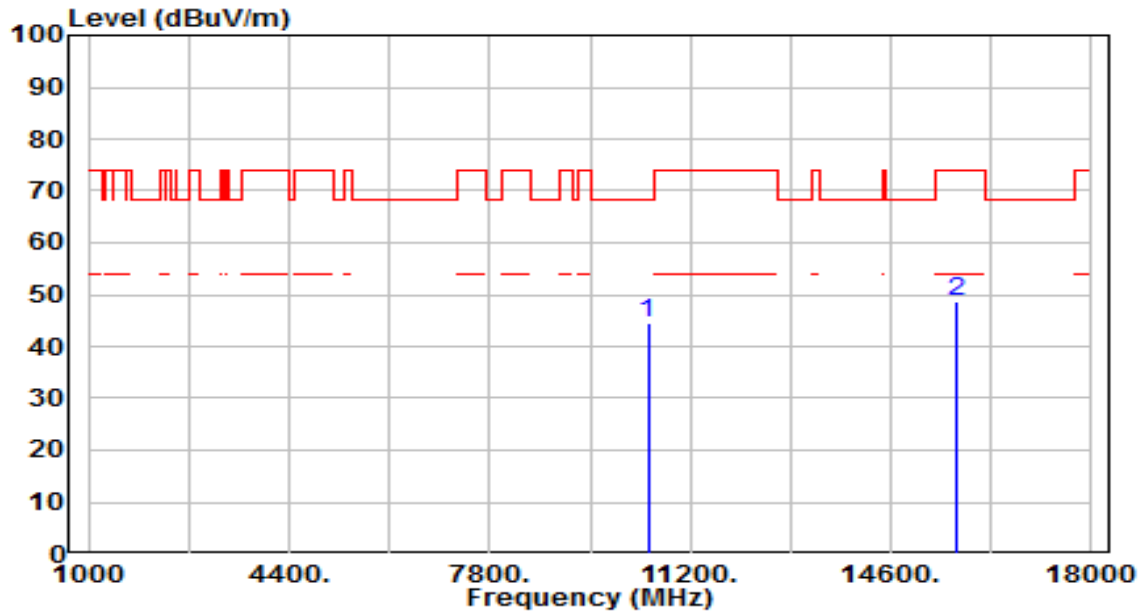


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	39.72	4.65	44.38	-23.82	68.20	200	174	Peak
2		15720.000	42.40	6.43	48.84	-25.16	74.00	200	157	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

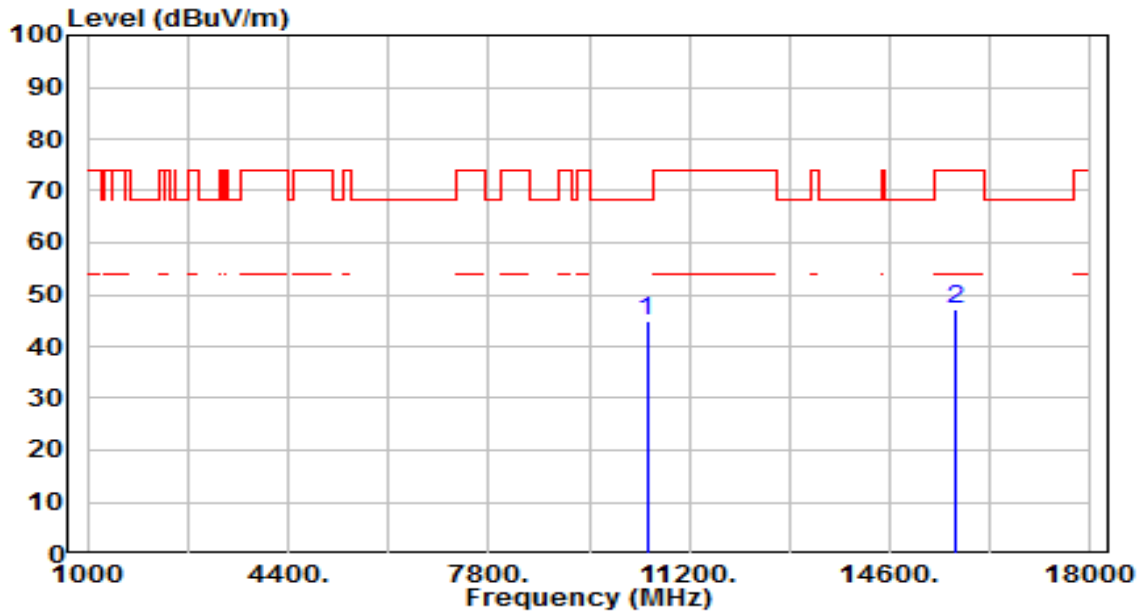


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	40.33	4.65	44.99	-23.21	68.20	200	127	Peak
2		15720.000	40.88	6.43	47.32	-26.68	74.00	200	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

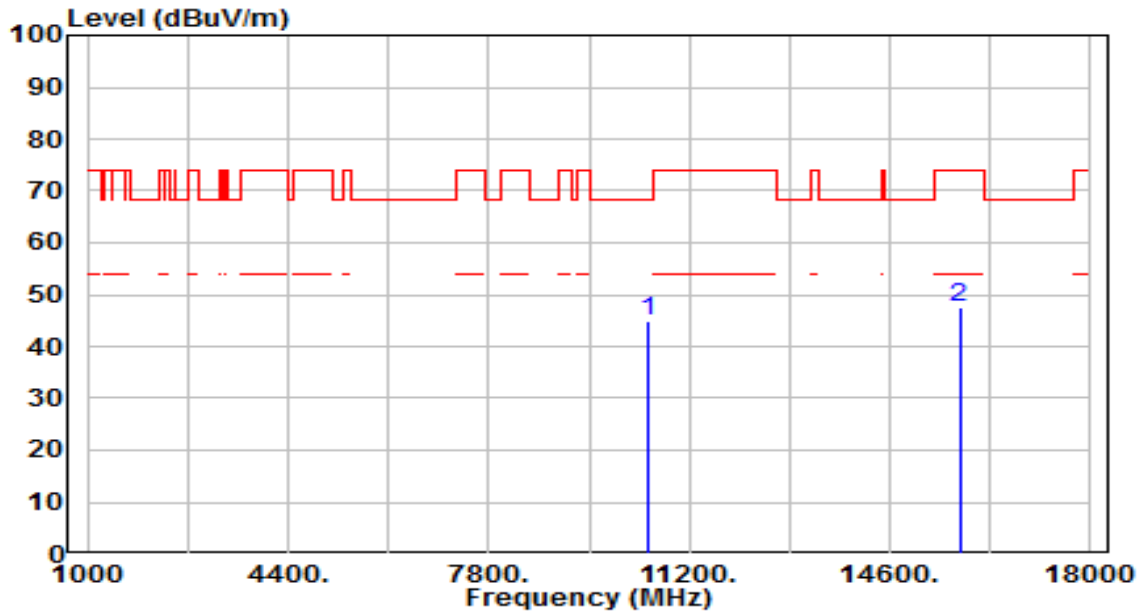


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	40.32	4.61	44.93	-23.27	68.20	200	247	Peak
2		15780.000	41.07	6.55	47.62	-26.38	74.00	200	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

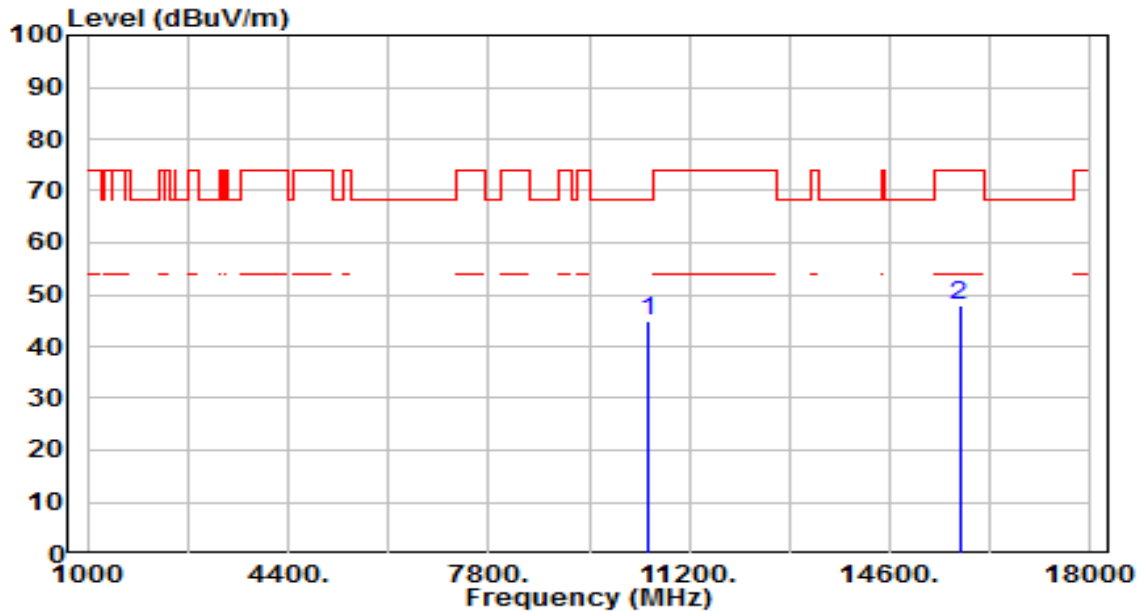


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	40.12	4.61	44.73	-23.47	68.20	200	32	Peak
2		15780.000	41.38	6.55	47.93	-26.07	74.00	200	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

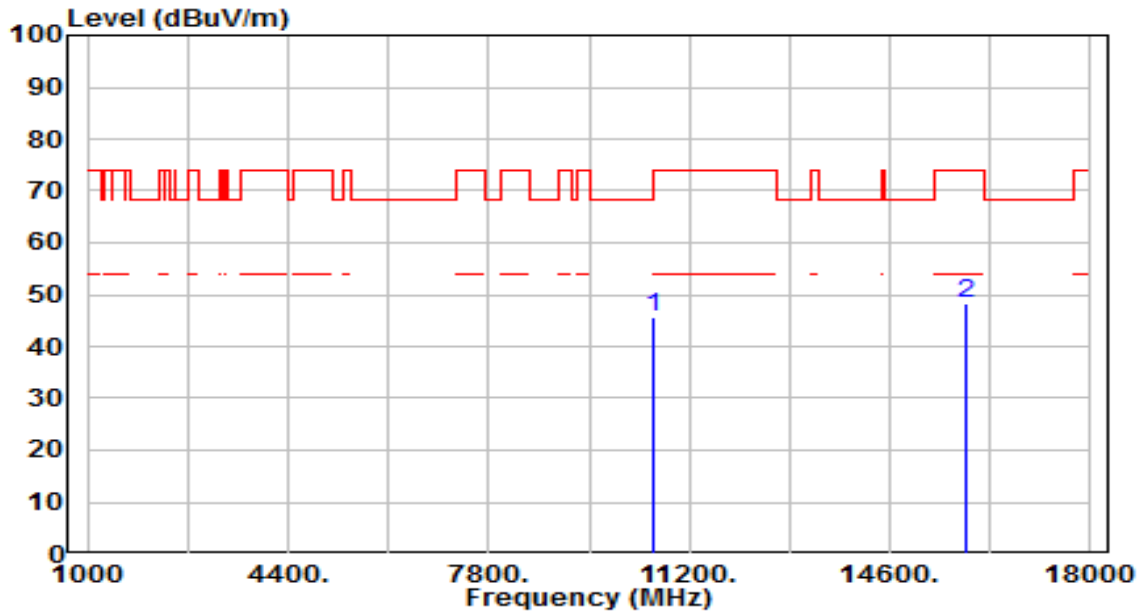


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.05	4.55	45.60	-22.60	68.20	200	290	Peak
2		15900.000	41.69	6.64	48.33	-25.67	74.00	200	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

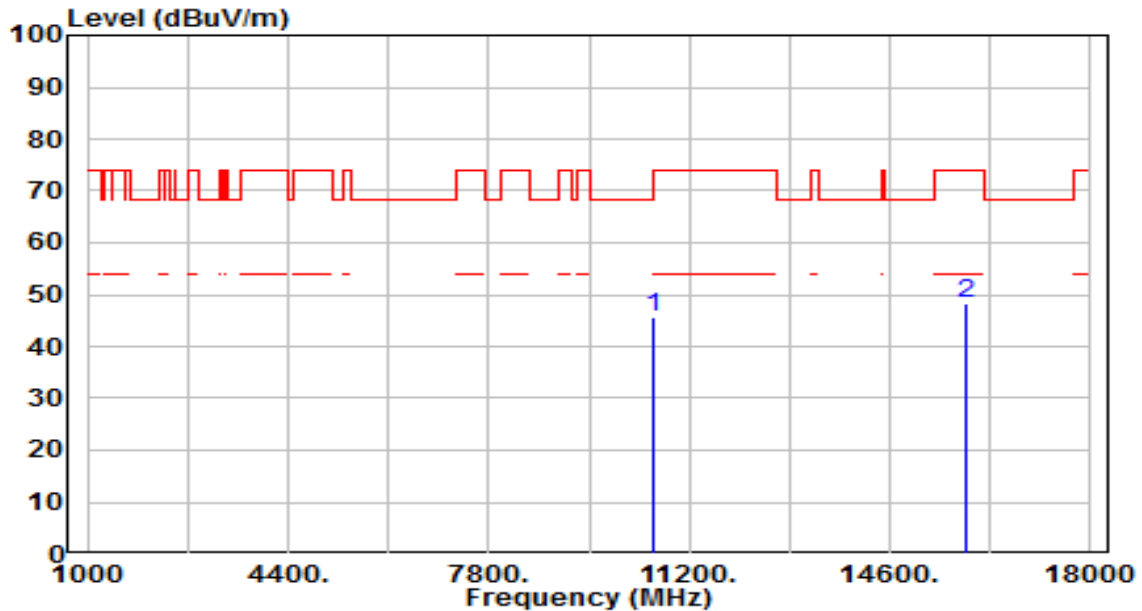


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.07	4.55	45.62	-22.58	68.20	200	142	Peak
2		15900.000	41.84	6.64	48.48	-25.52	74.00	200	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

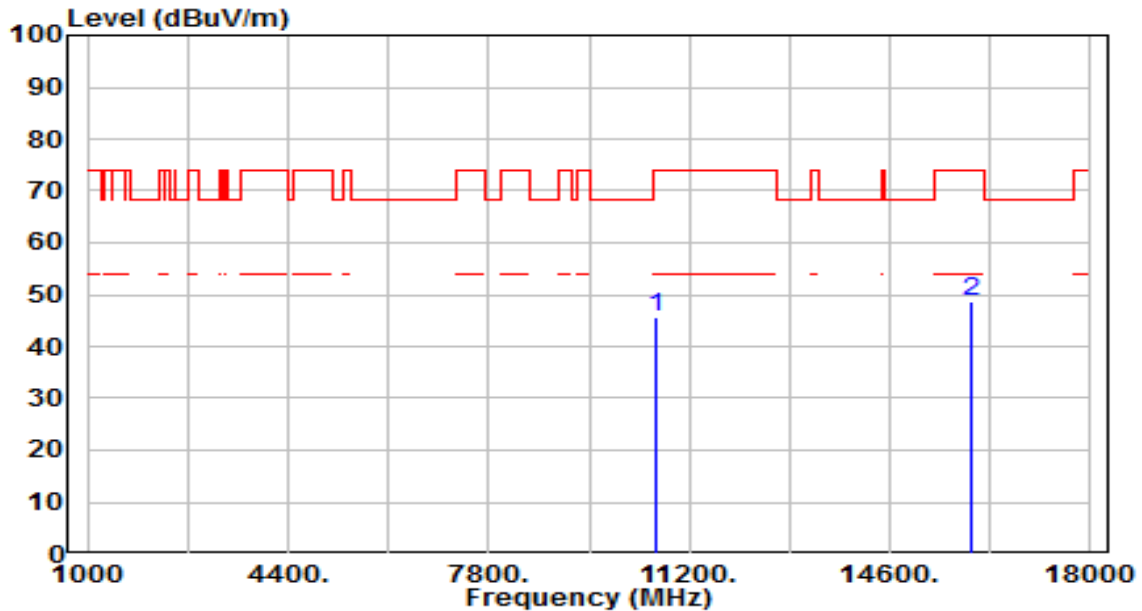


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.02	4.58	45.60	-28.40	74.00	200	290	Peak
2	* 15960.000	42.03	6.67	48.70	-25.30	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

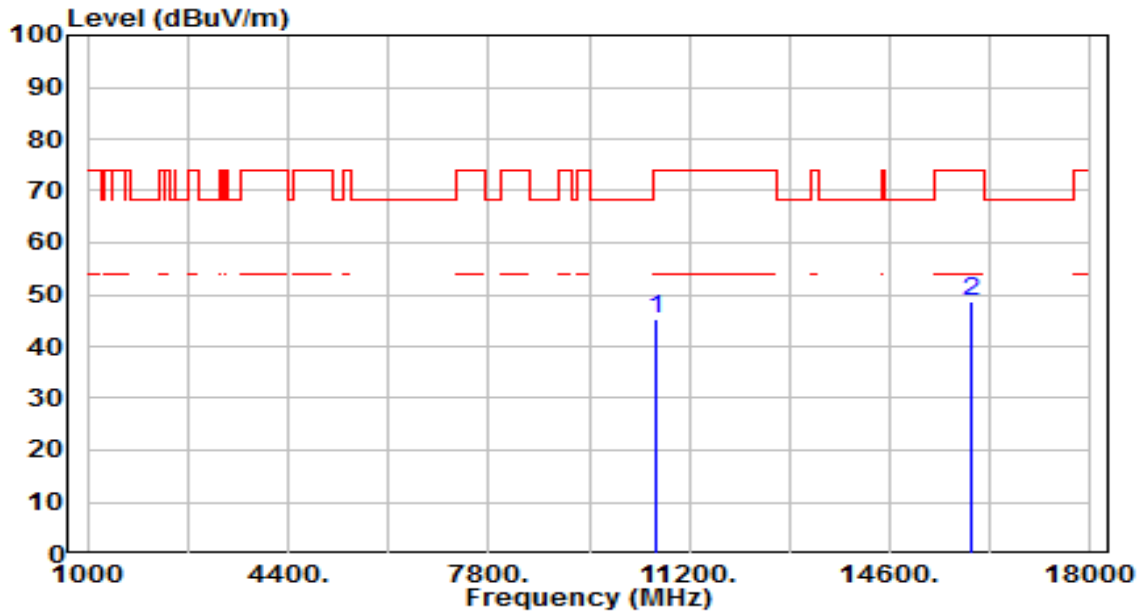


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	40.88	4.58	45.46	-28.54	74.00	200	101	Peak
2	* 15960.000	42.03	6.67	48.70	-25.30	74.00	200	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

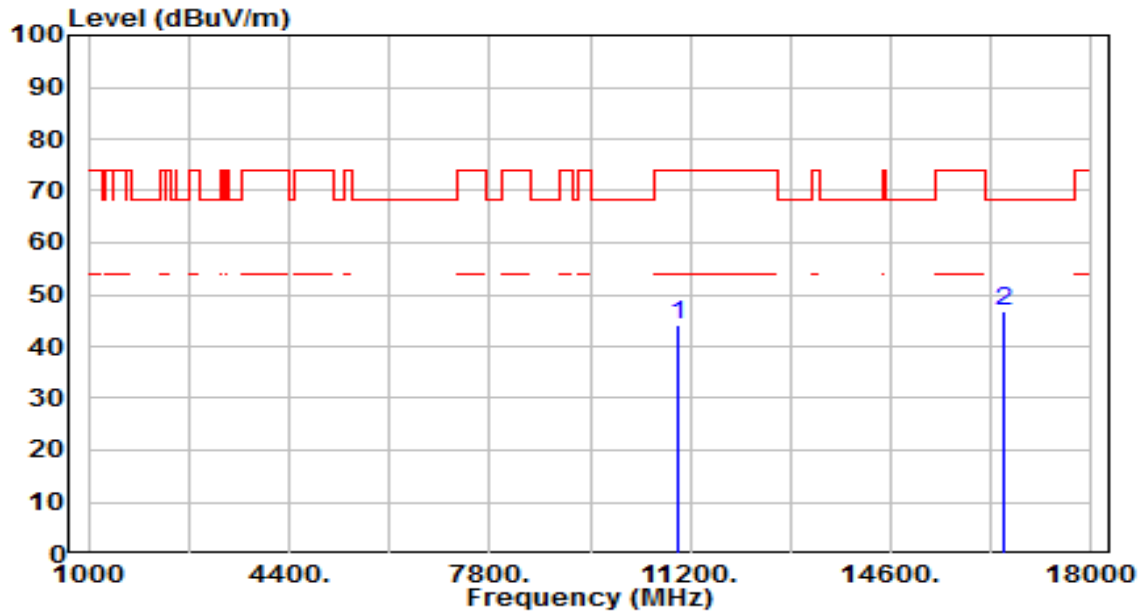


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	39.64	4.44	44.08	-29.92	74.00	200	200	Peak
2	*	16500.000	40.77	6.07	46.84	-21.36	68.20	200	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

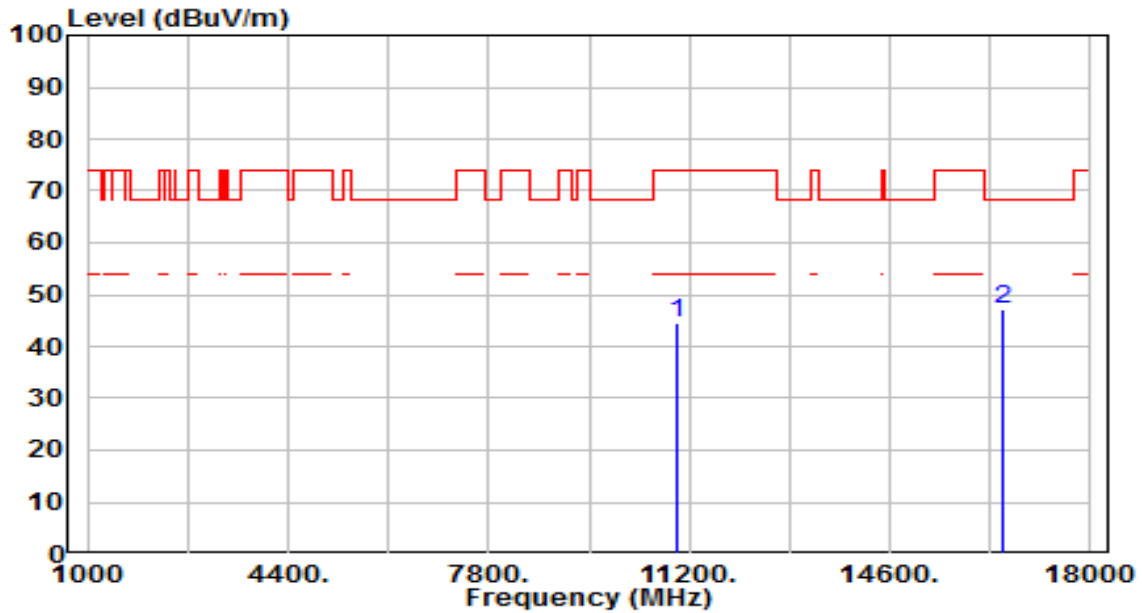


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	40.16	4.44	44.60	-29.40	74.00	200	314	Peak
2	*	16500.000	40.98	6.07	47.05	-21.15	68.20	200	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

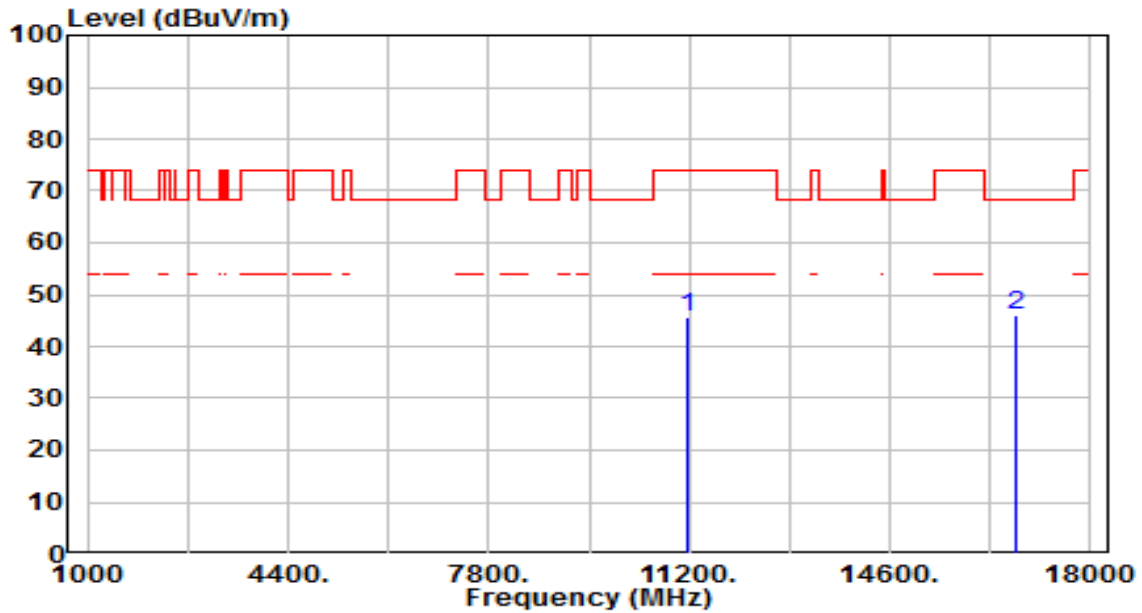


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	40.90	4.87	45.77	-28.23	74.00	200	0	Peak
2	*	16740.000	39.85	6.01	45.86	-22.34	68.20	200	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

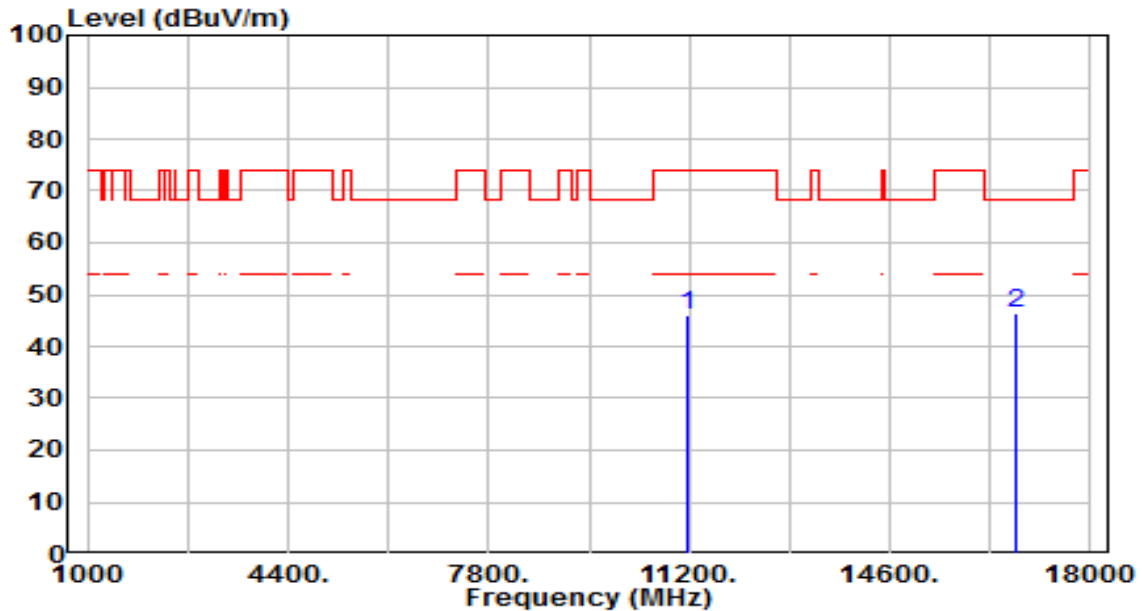


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.14	4.87	46.01	-27.99	74.00	200	325	Peak
2	*	16740.000	40.56	6.01	46.57	-21.63	68.20	200	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

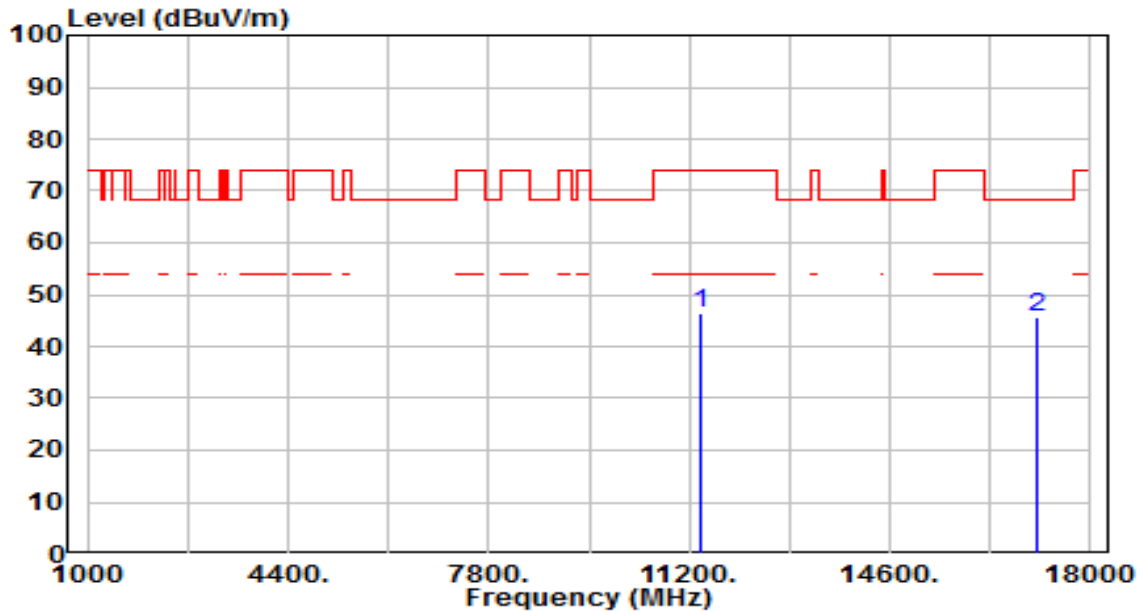


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.29	5.22	46.51	-27.49	74.00	200	281	Peak
2	*	17100.000	40.12	5.54	45.66	-22.54	68.20	200	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

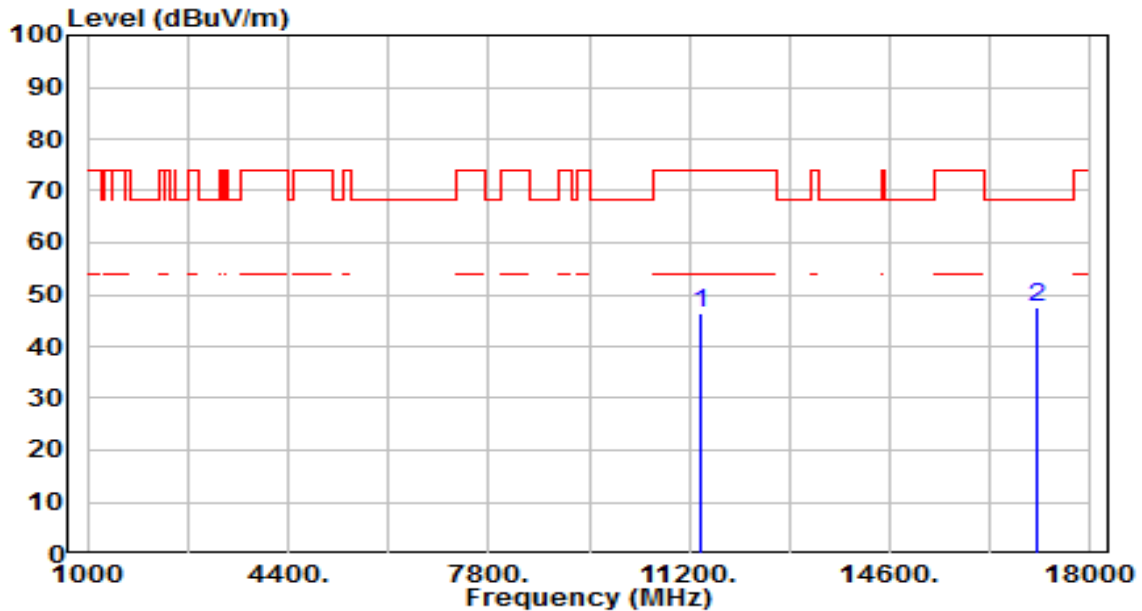


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.32	5.22	46.53	-27.47	74.00	200	162	Peak
2	*	17100.000	41.93	5.54	47.47	-20.73	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

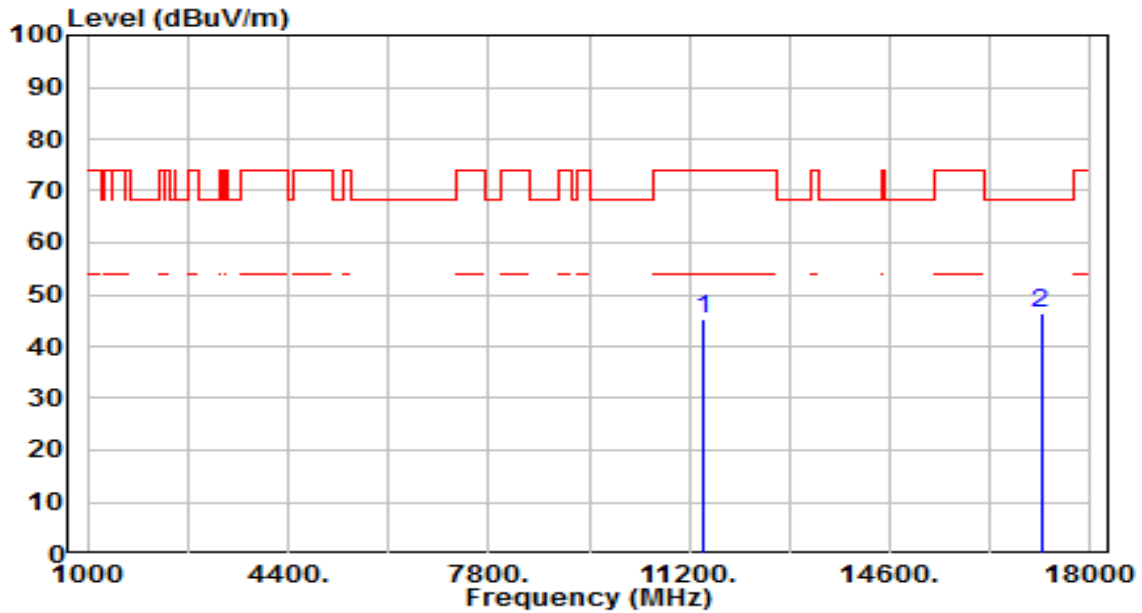


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	39.89	5.24	45.13	-28.87	74.00	200	26	Peak
2	*	17160.000	41.19	5.41	46.60	-21.60	68.20	200	296	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

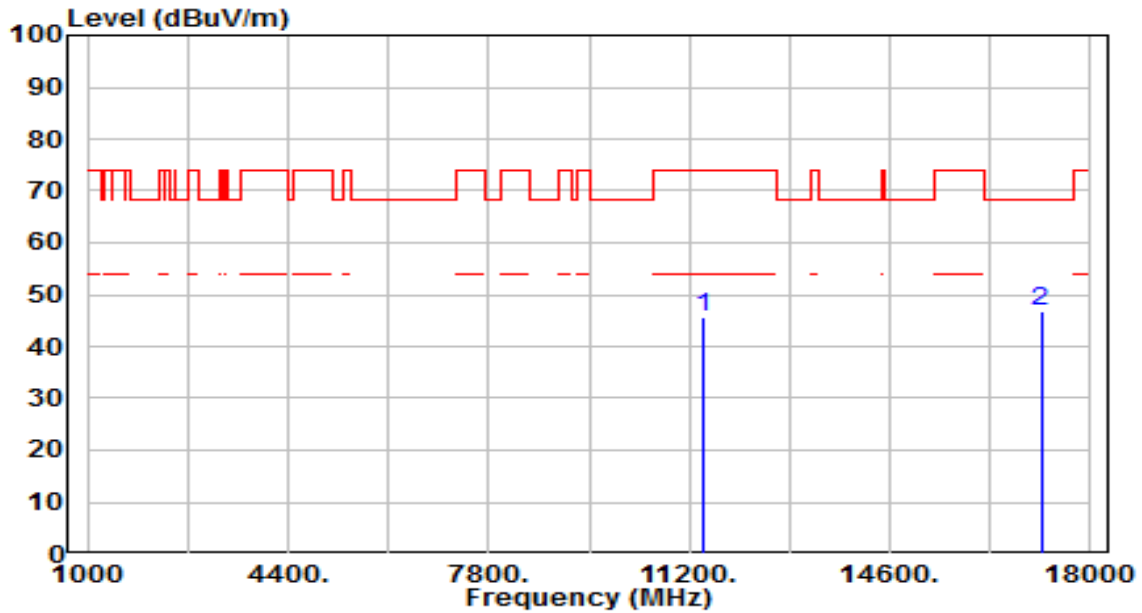


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	40.30	5.24	45.54	-28.46	74.00	200	340	Peak
2	*	17160.000	41.32	5.41	46.73	-21.47	68.20	200	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

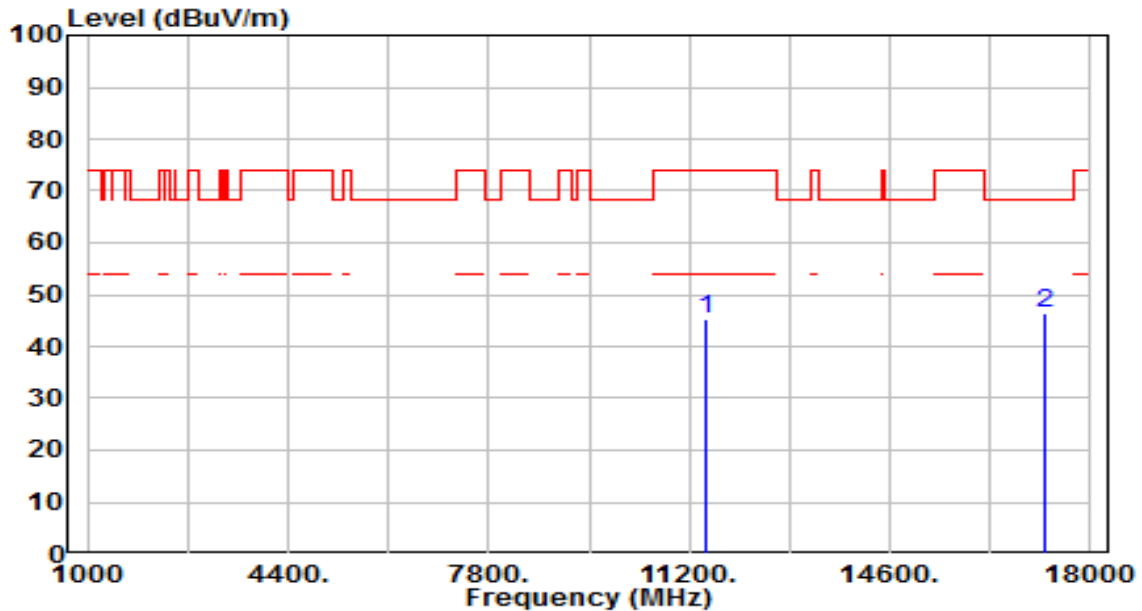


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	39.93	5.28	45.20	-28.80	74.00	200	348	Peak
2	*	17235.000	41.24	5.25	46.48	-21.72	68.20	200	308	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

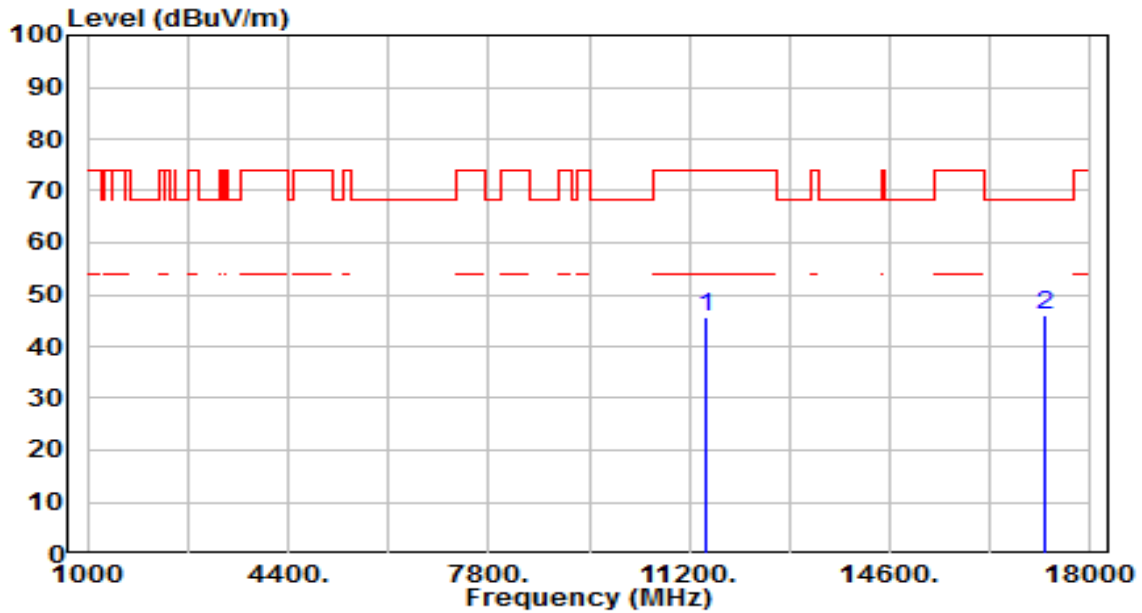


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	40.30	5.28	45.57	-28.43	74.00	200	69	Peak
2	*	17235.000	40.87	5.25	46.12	-22.08	68.20	200	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

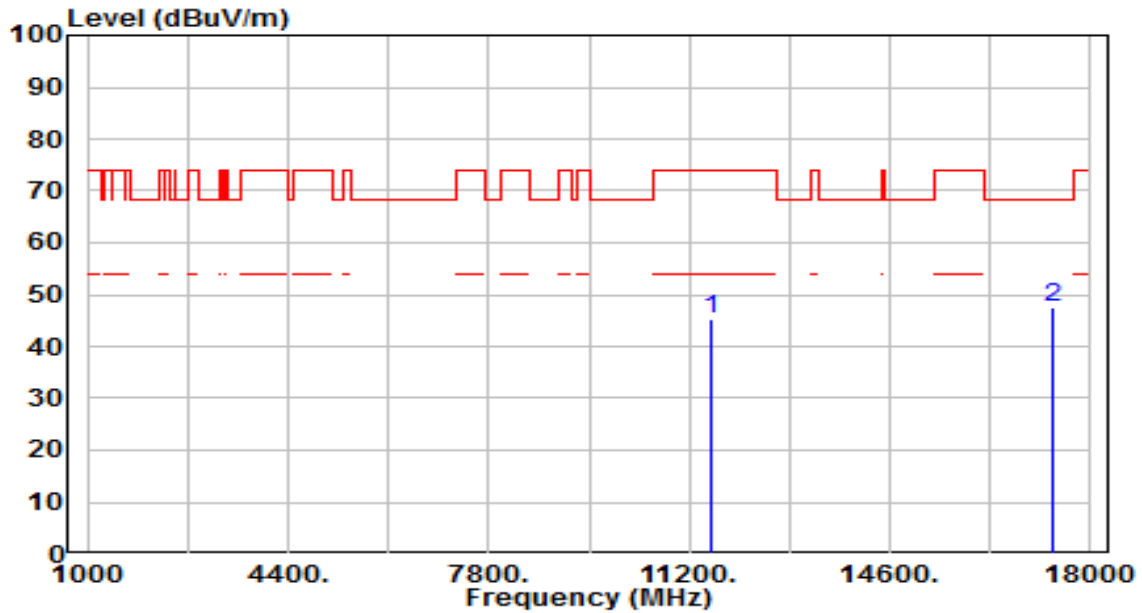


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	39.80	5.35	45.15	-28.85	74.00	200	232	Peak
2	*	17355.000	42.74	4.99	47.72	-20.48	68.20	200	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

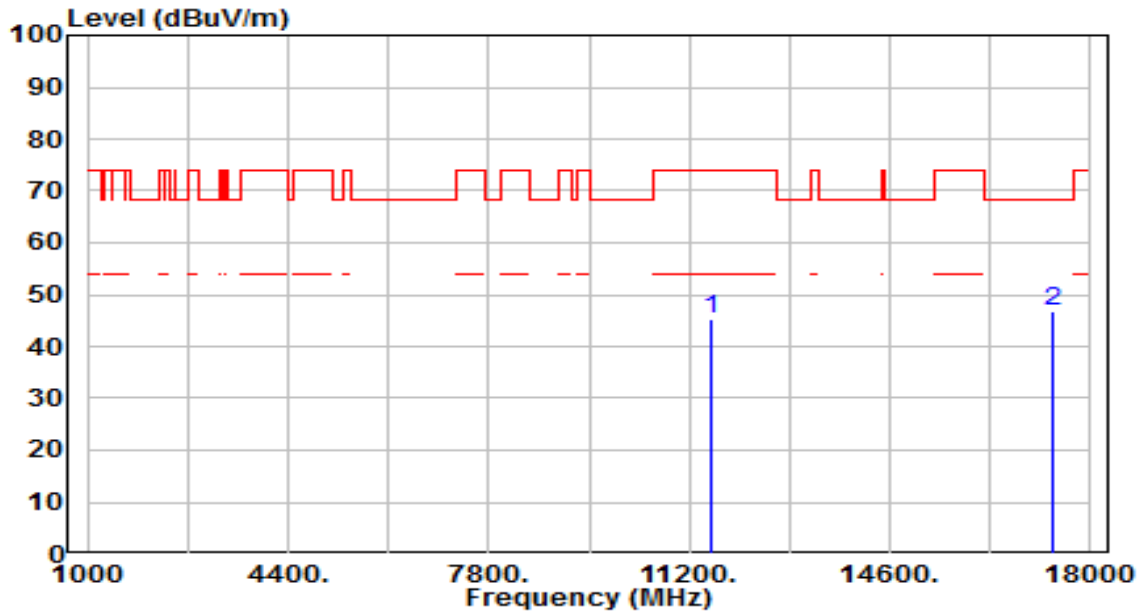


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	40.11	5.35	45.46	-28.54	74.00	200	267	Peak
2	*	17355.000	41.70	4.99	46.69	-21.51	68.20	200	223	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

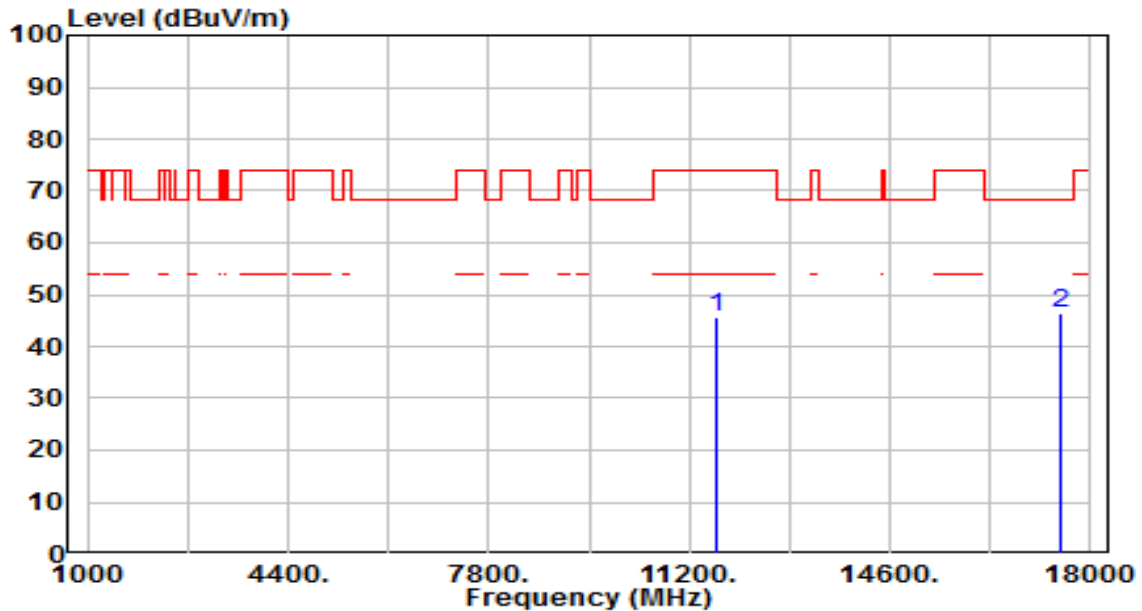


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	40.30	5.37	45.67	-28.33	74.00	200	360	Peak
2	*	17475.000	41.21	5.02	46.24	-21.96	68.20	200	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

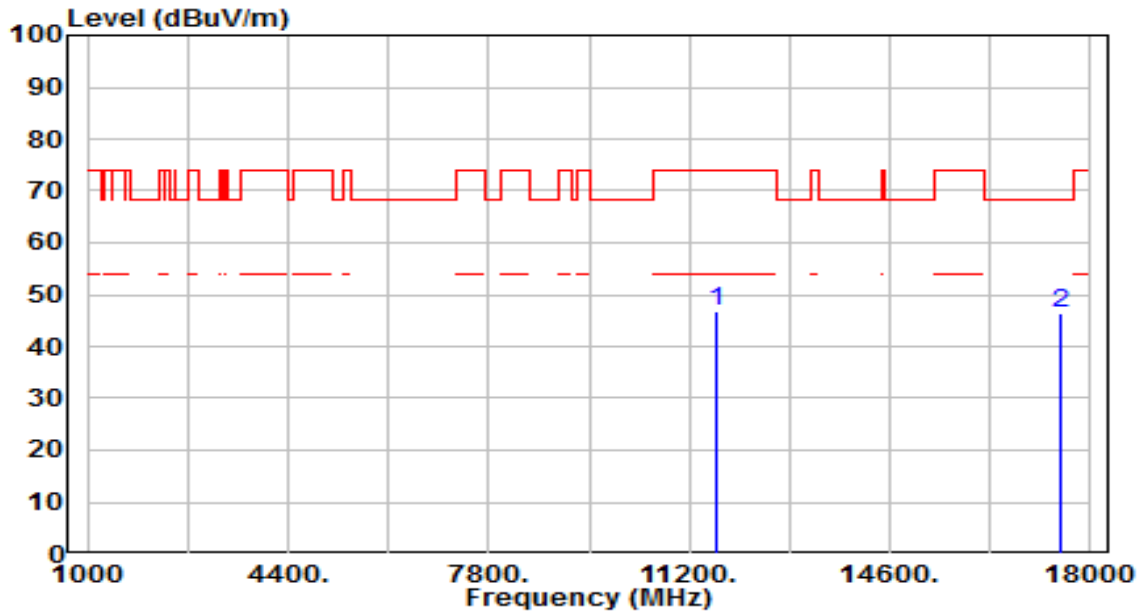


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.30	5.37	46.67	-27.33	74.00	200	8	Peak
2	* 17475.000	41.57	5.02	46.59	-21.61	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

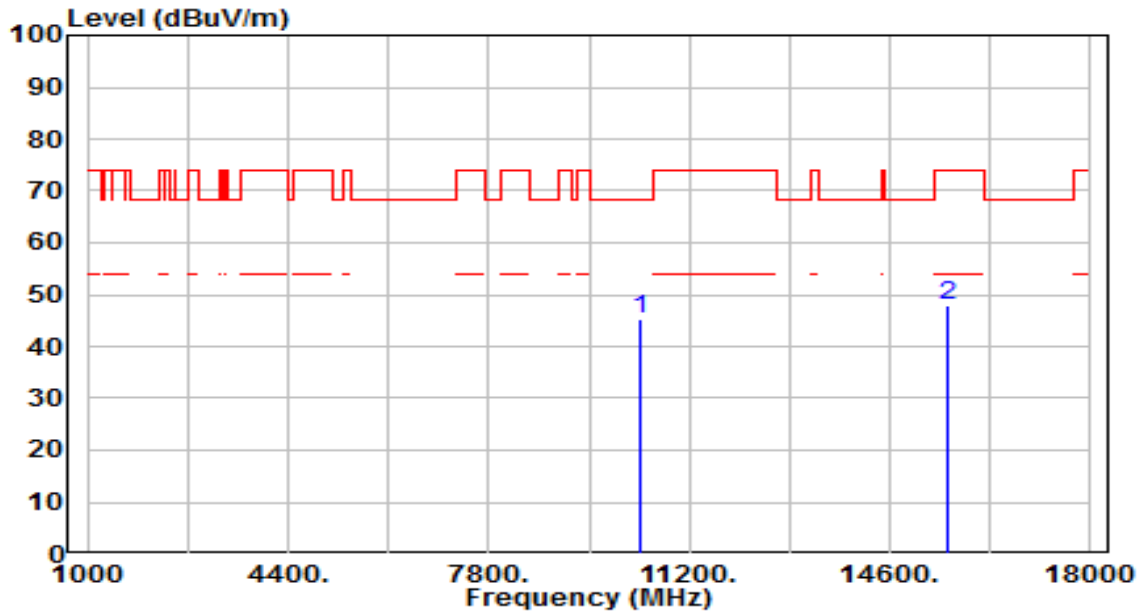


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	40.34	4.79	45.13	-23.07	68.20	200	192	Peak
2		15570.000	41.87	6.24	48.11	-25.89	74.00	200	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

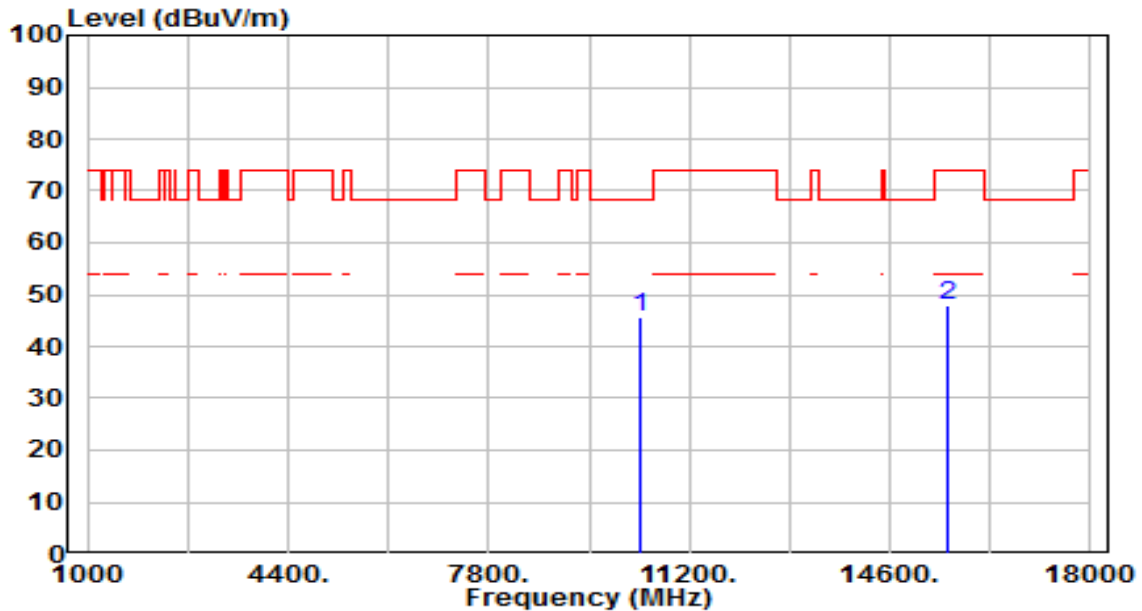


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	40.81	4.79	45.61	-22.59	68.20	200	69	Peak
2		15570.000	41.71	6.24	47.95	-26.05	74.00	200	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

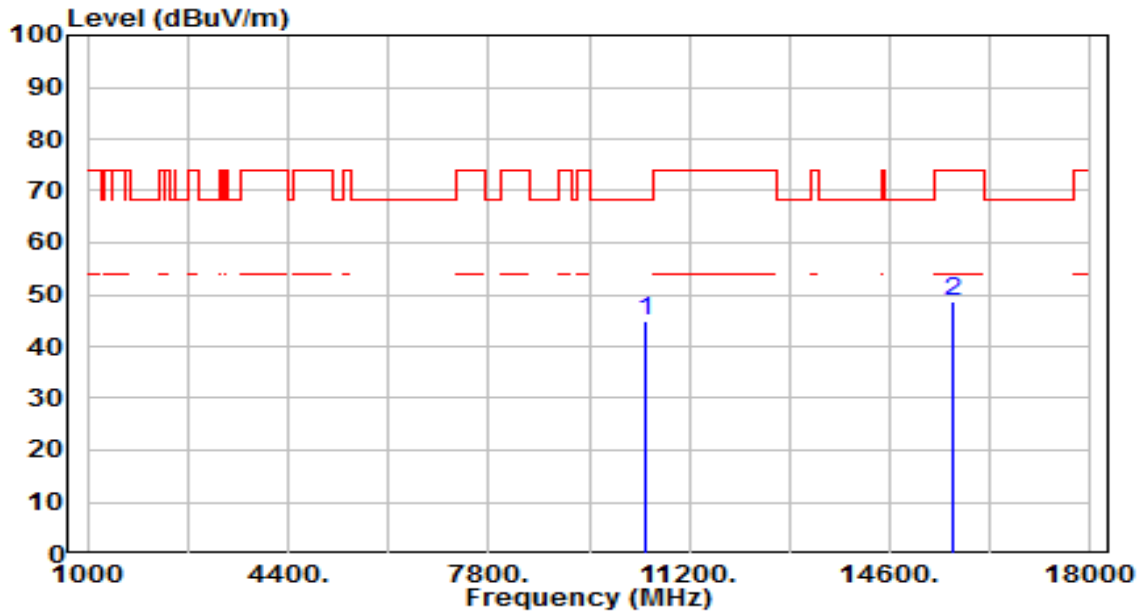


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	40.07	4.68	44.76	-23.44	68.20	200	0	Peak
2		15690.000	42.46	6.37	48.84	-25.16	74.00	200	157	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

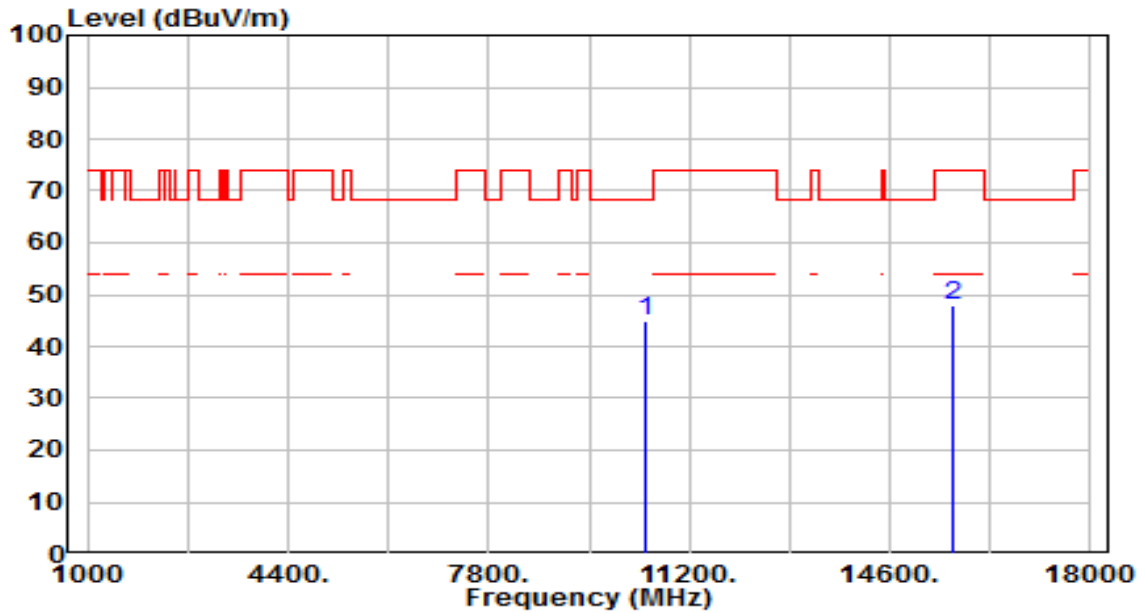


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	40.30	4.68	44.99	-23.21	68.20	200	127	Peak
2		15690.000	41.69	6.37	48.06	-25.94	74.00	200	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

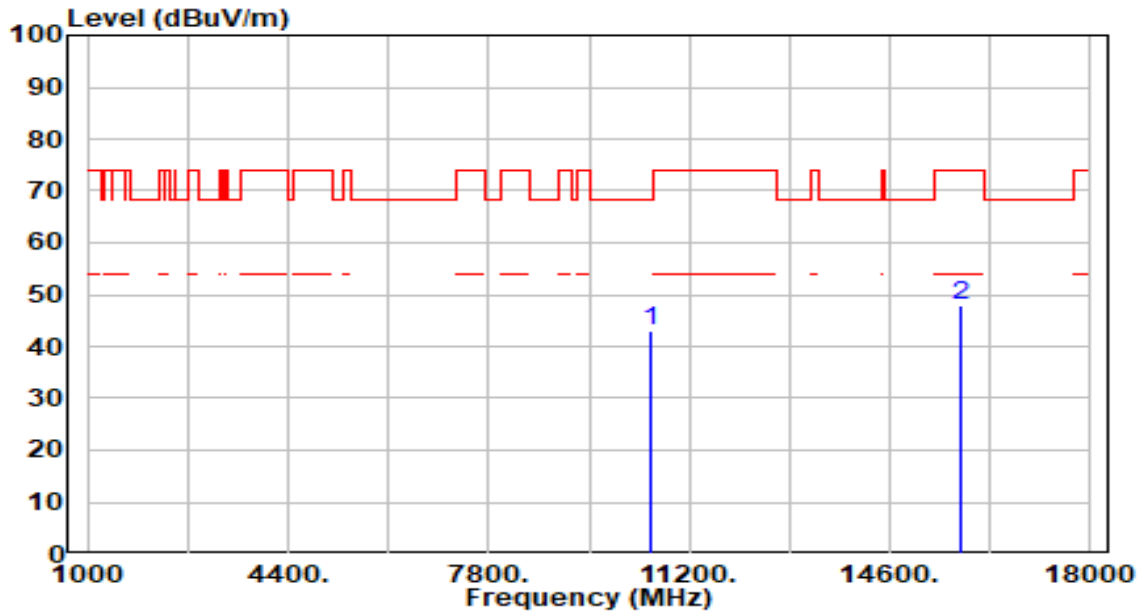


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	38.41	4.59	43.00	-25.20	68.20	200	22	Peak
2		15810.000	41.29	6.60	47.89	-26.11	74.00	200	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

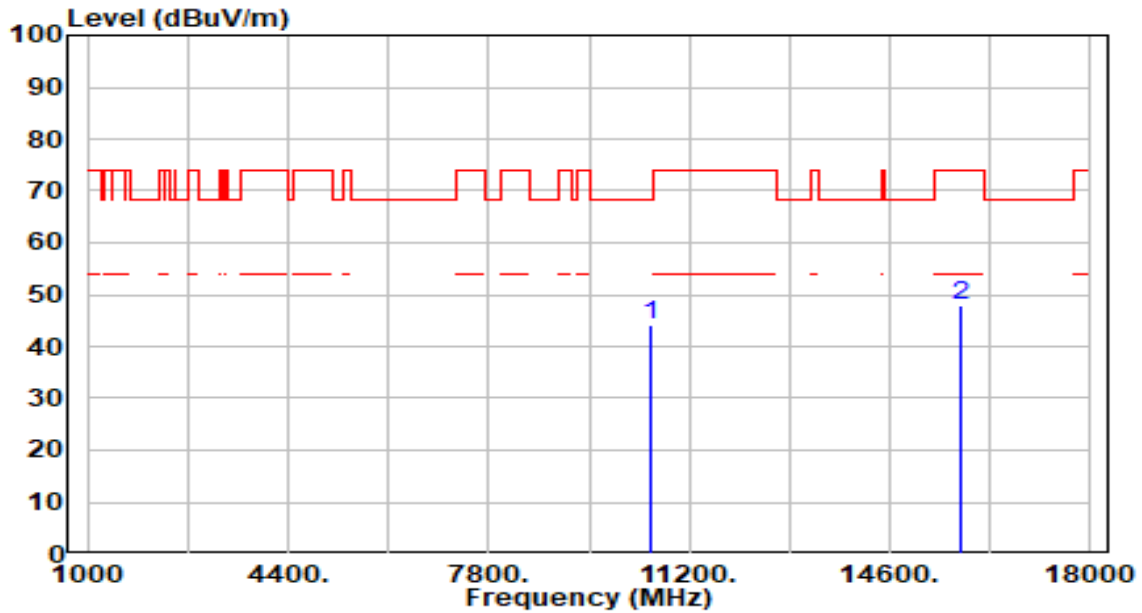


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	39.45	4.59	44.05	-24.15	68.20	200	68	Peak
2		15810.000	41.40	6.60	48.00	-26.00	74.00	200	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

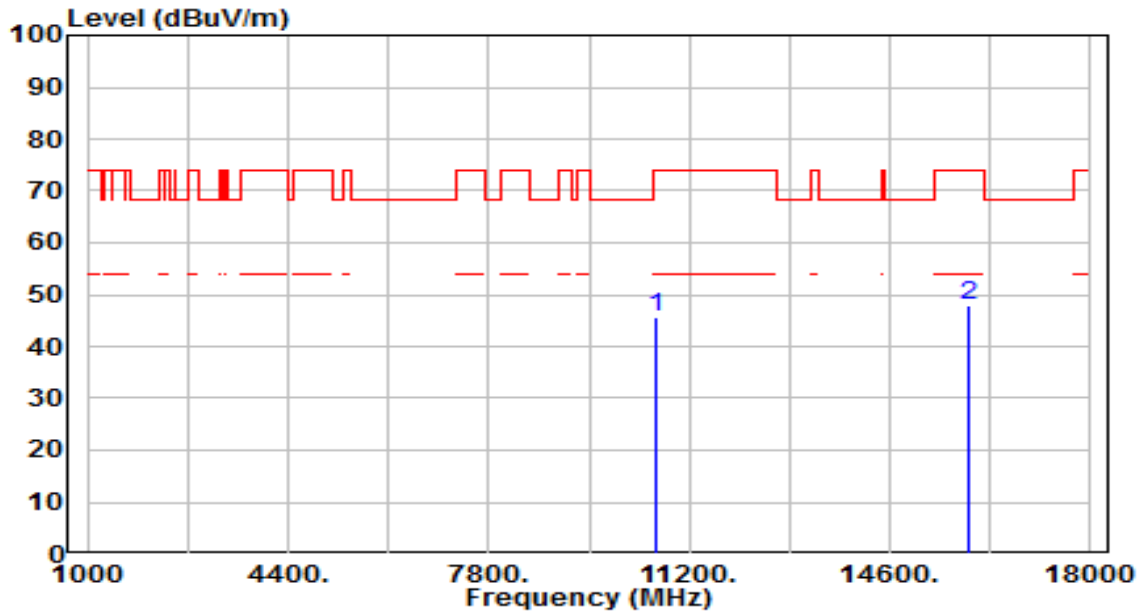


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	41.04	4.56	45.60	-28.40	74.00	200	290	Peak
2	*	15930.000	41.23	6.66	47.89	-26.11	74.00	200	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

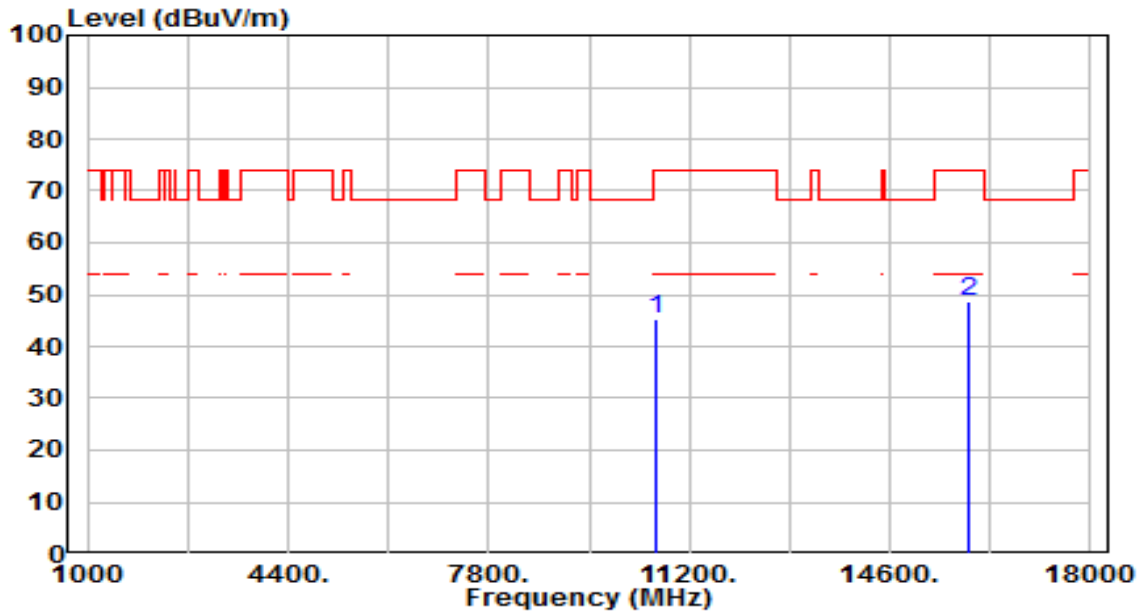


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	40.84	4.56	45.40	-28.60	74.00	200	229	Peak
2	*	15930.000	42.04	6.66	48.70	-25.30	74.00	200	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

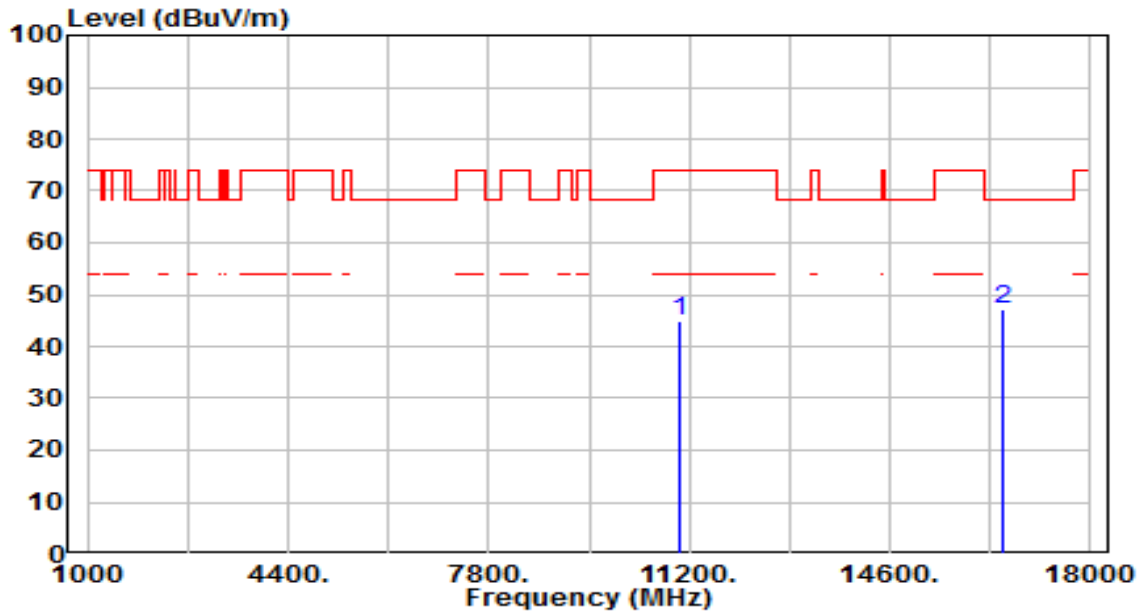


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	40.26	4.49	44.76	-29.24	74.00	200	215	Peak
2	*	16530.000	41.23	6.05	47.28	-20.92	68.20	200	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

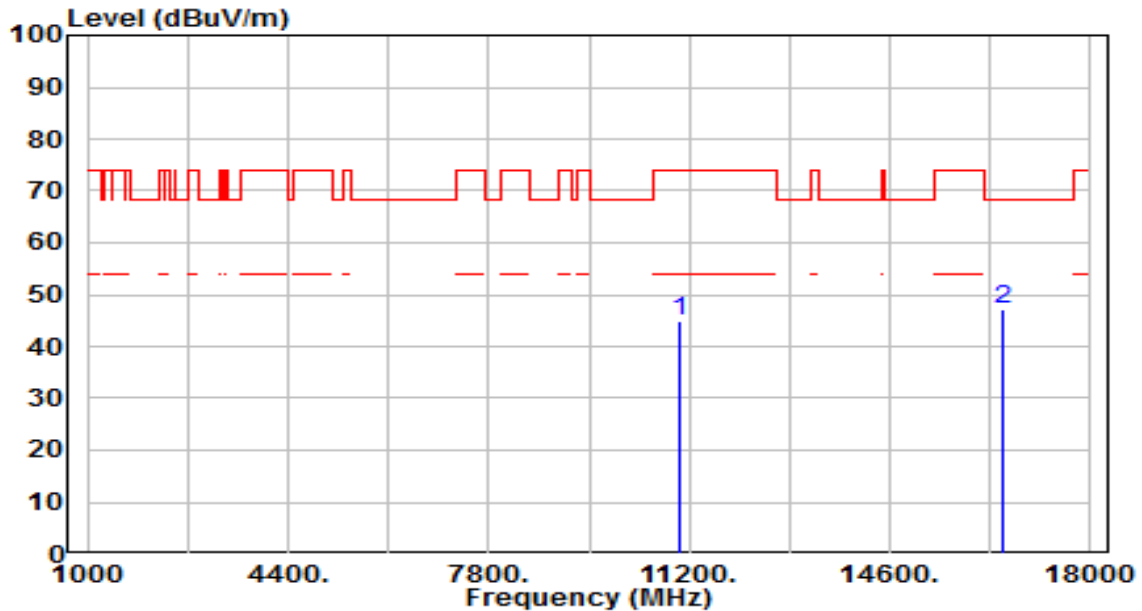


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	40.24	4.49	44.74	-29.26	74.00	200	58	Peak
2	*	16530.000	40.96	6.05	47.00	-21.20	68.20	200	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

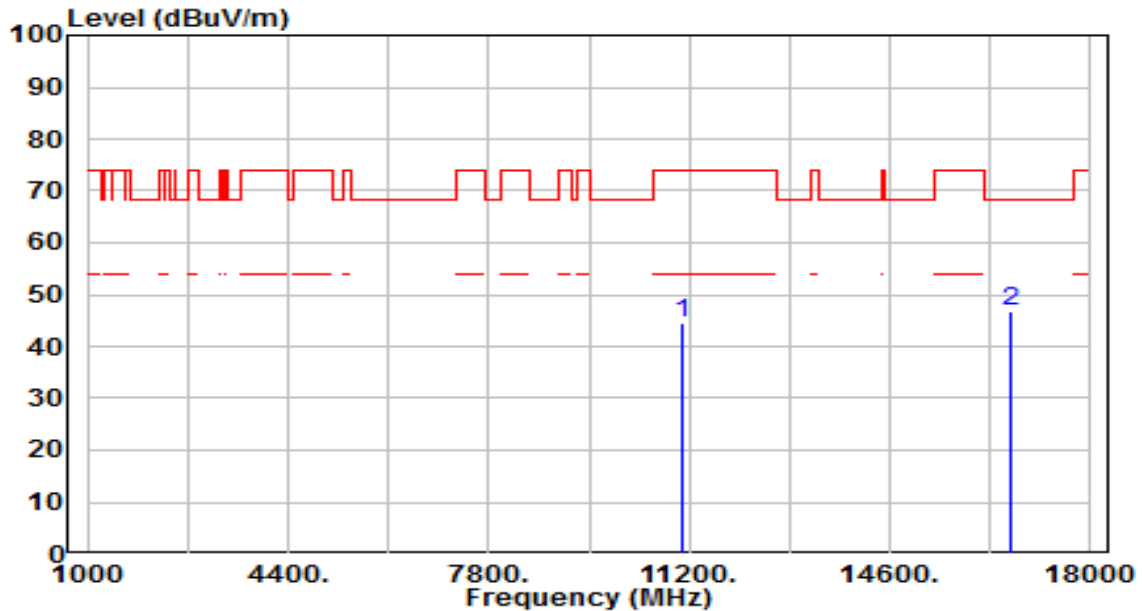


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	39.99	4.71	44.70	-29.30	74.00	200	198	Peak
2	*	16650.000	40.90	6.00	46.90	-21.30	68.20	200	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

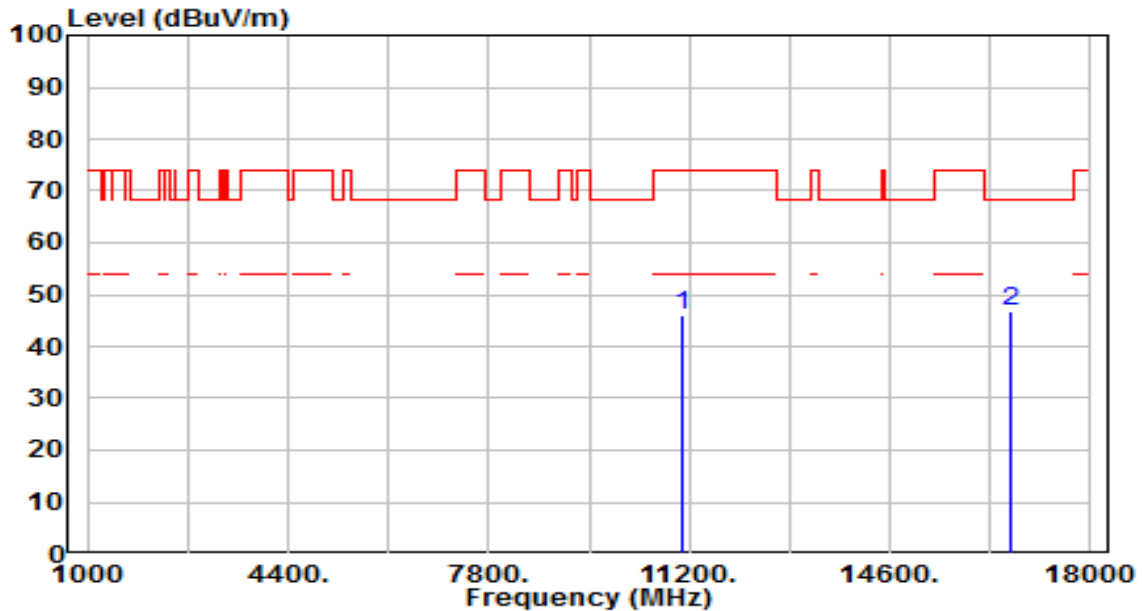


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.46	4.71	46.17	-27.83	74.00	200	156	Peak
2	*	16650.000	40.70	6.00	46.70	-21.50	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

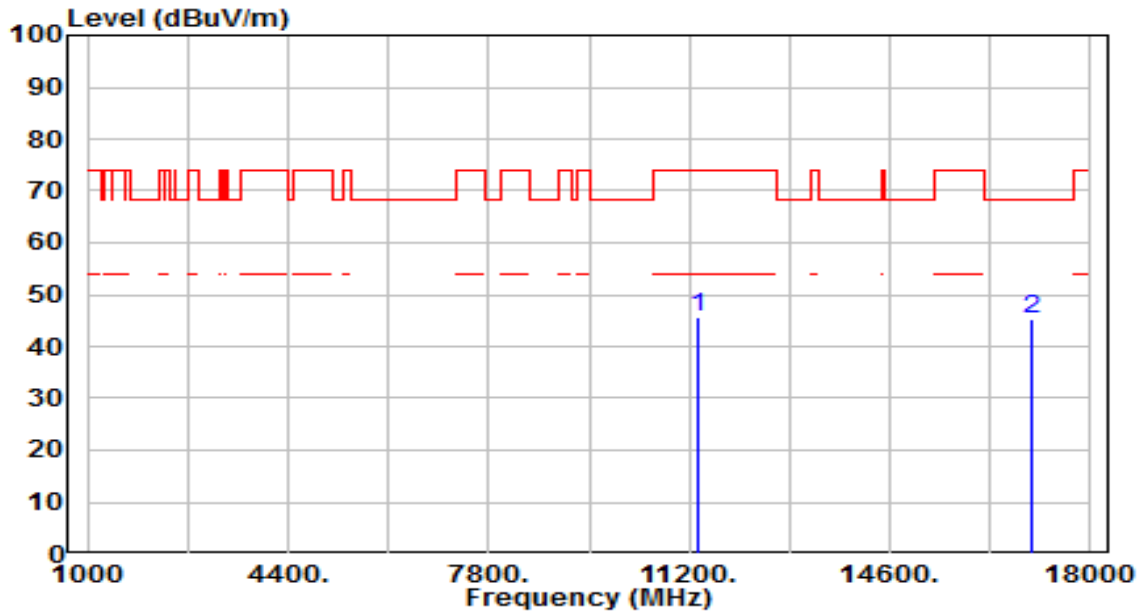


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	40.63	5.14	45.77	-28.23	74.00	200	166	Peak
2	* 17010.000	39.63	5.74	45.37	-22.83	68.20	200	47	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

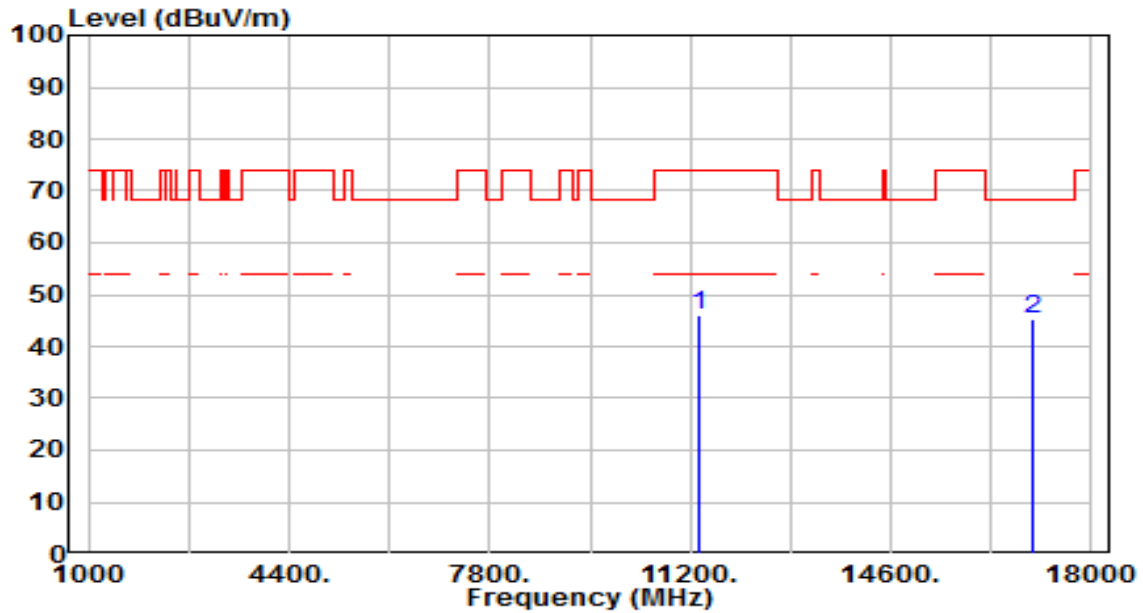


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	40.87	5.14	46.02	-27.98	74.00	200	229	Peak
2	*	17010.000	39.69	5.74	45.43	-22.77	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

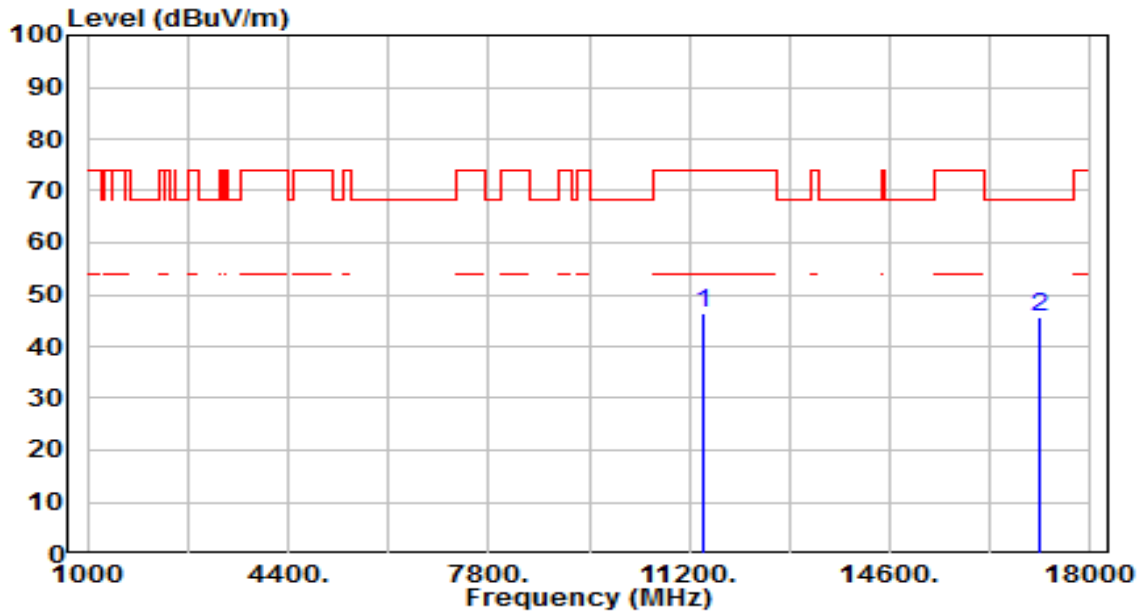


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.28	5.23	46.51	-27.49	74.00	200	281	Peak
2	*	17130.000	40.11	5.48	45.59	-22.61	68.20	200	122	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

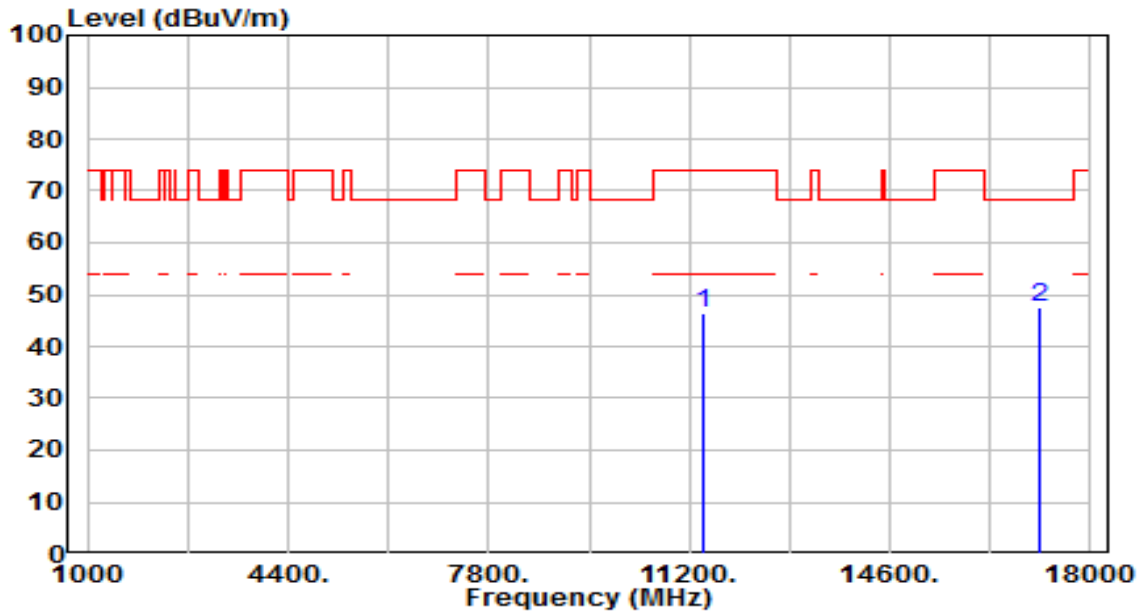


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.30	5.23	46.53	-27.47	74.00	200	162	Peak
2	*	17130.000	41.99	5.48	47.47	-20.73	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

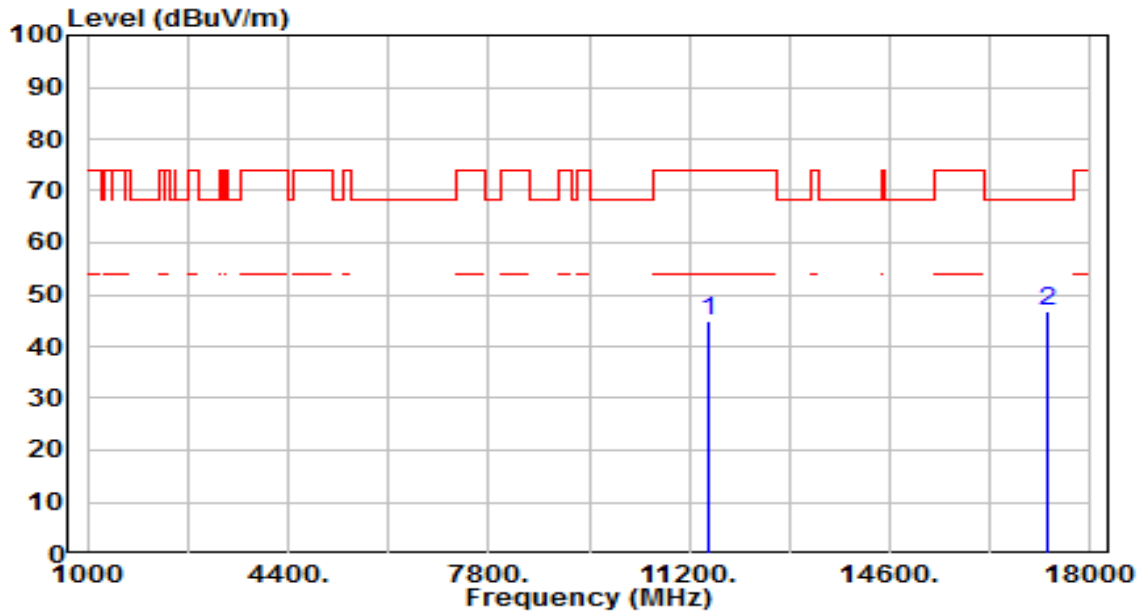


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	39.64	5.29	44.93	-29.07	74.00	200	241	Peak
2	*	17265.000	41.57	5.18	46.75	-21.45	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

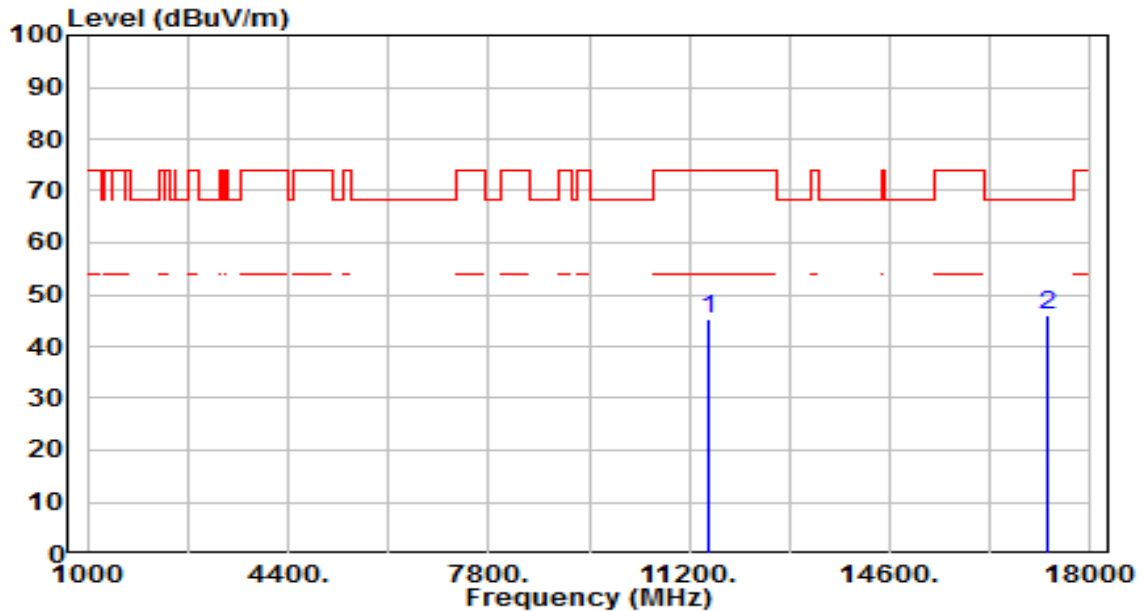


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	39.81	5.29	45.10	-28.90	74.00	200	235	Peak
2	*	17265.000	40.74	5.18	45.92	-22.28	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

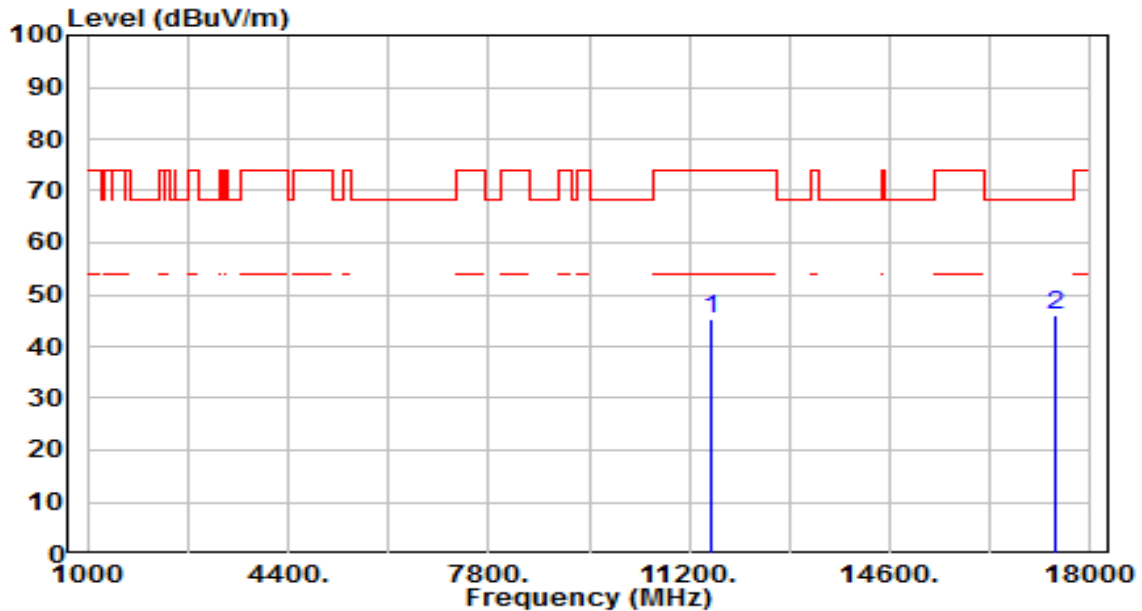


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	39.74	5.37	45.11	-28.89	74.00	200	168	Peak
2	*	17385.000	41.15	4.92	46.08	-22.12	68.20	200	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

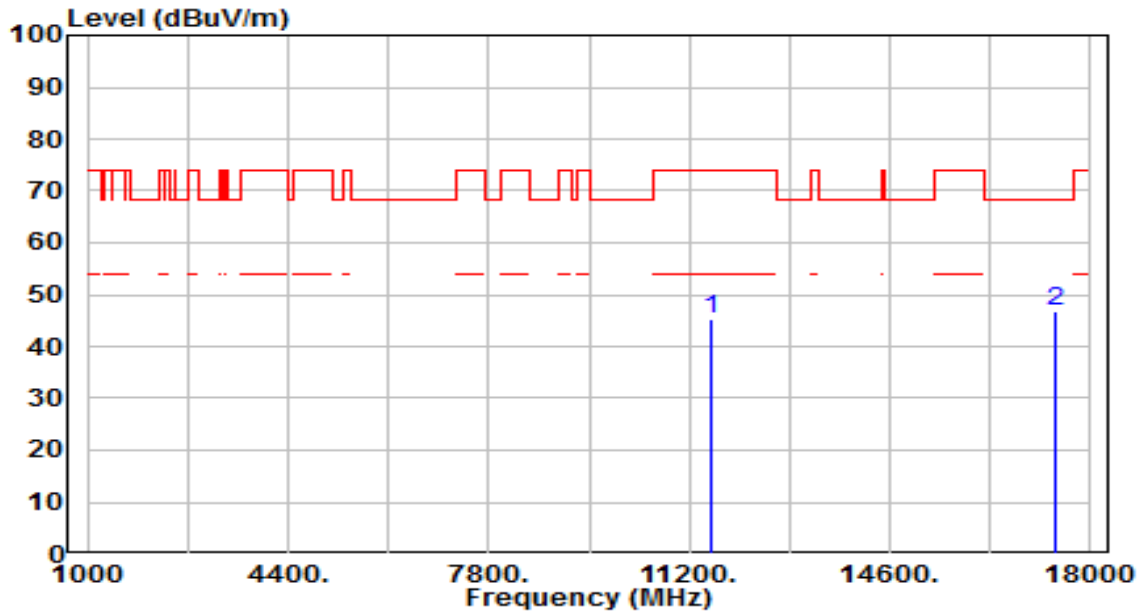


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	40.09	5.37	45.46	-28.54	74.00	200	267	Peak
2	*	17385.000	42.06	4.92	46.98	-21.22	68.20	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

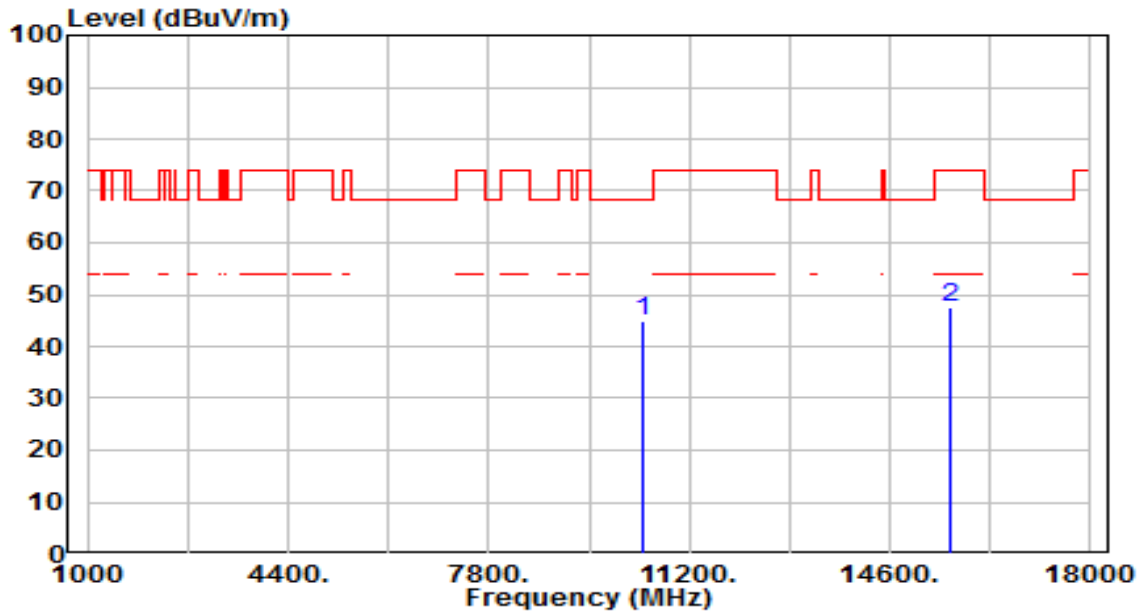


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.13	4.74	44.87	-23.33	68.20	200	49	Peak
2		15630.000	41.21	6.25	47.47	-26.53	74.00	200	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

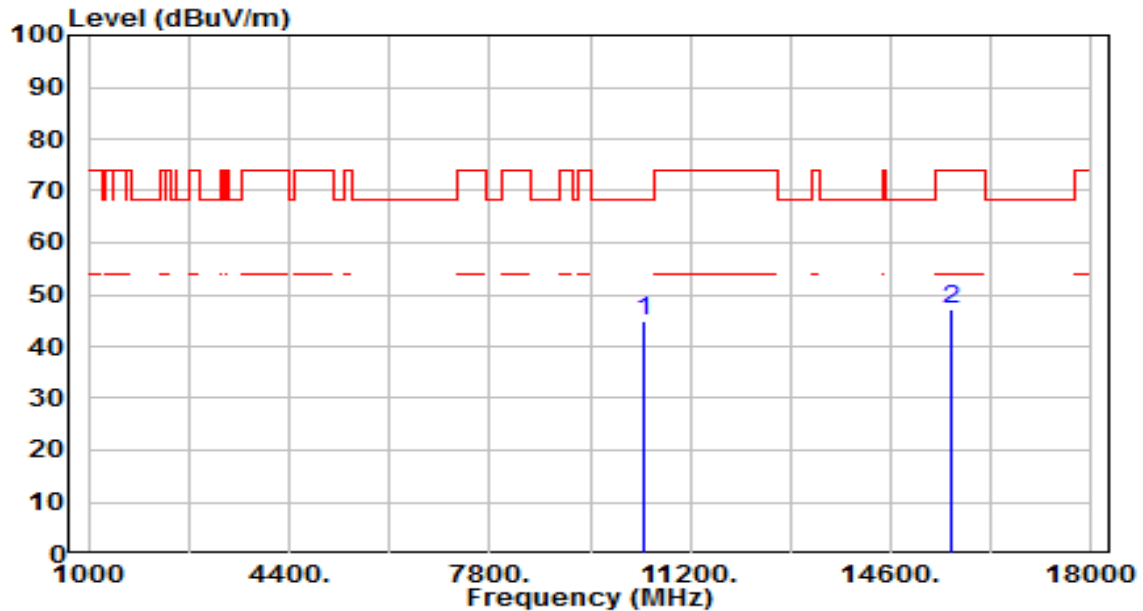


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.12	4.74	44.87	-23.33	68.20	200	212	Peak
2		15630.000	41.03	6.25	47.28	-26.72	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

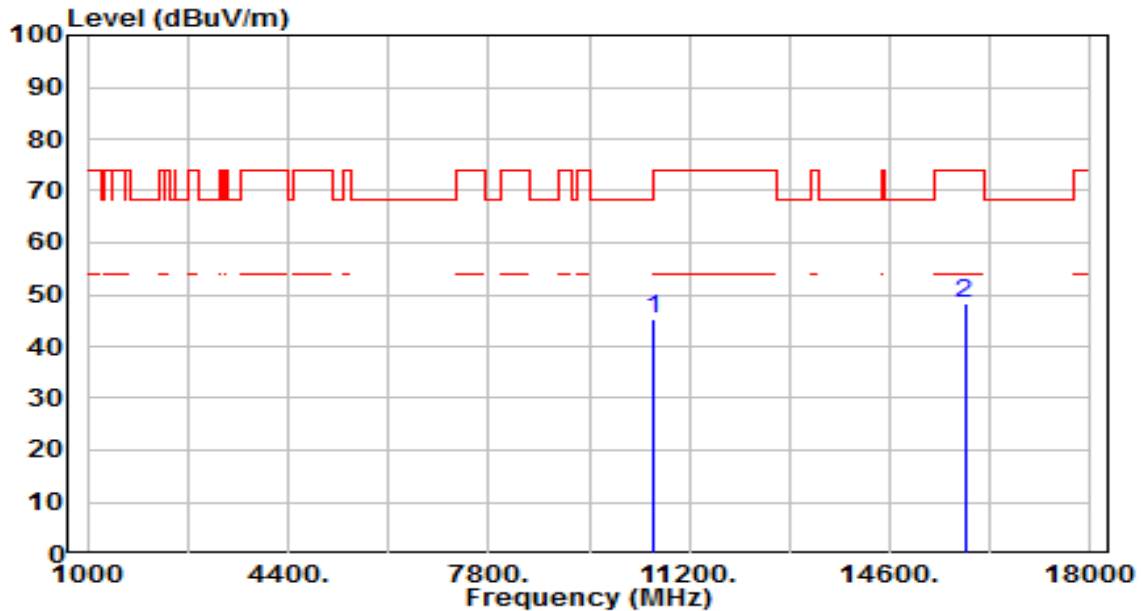


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	40.88	4.56	45.44	-22.76	68.20	200	145	Peak
2		15870.000	41.71	6.63	48.33	-25.67	74.00	200	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

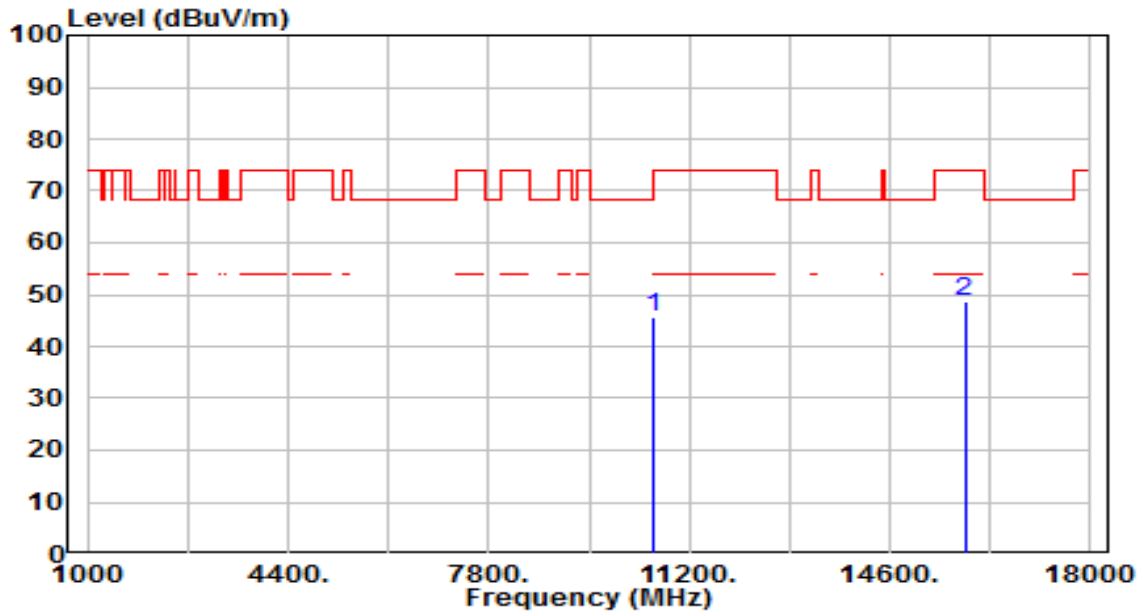


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.06	4.56	45.62	-22.58	68.20	200	142	Peak
2		15870.000	41.89	6.63	48.52	-25.48	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

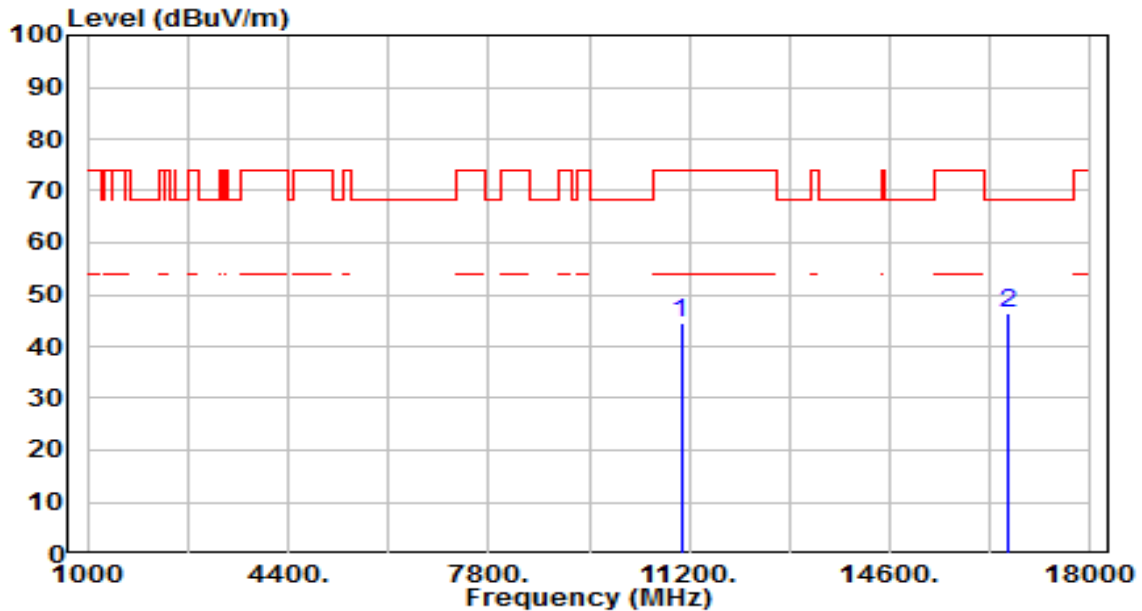


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	39.90	4.60	44.50	-29.50	74.00	200	67	Peak
2	* 16590.000	40.43	6.00	46.43	-21.77	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

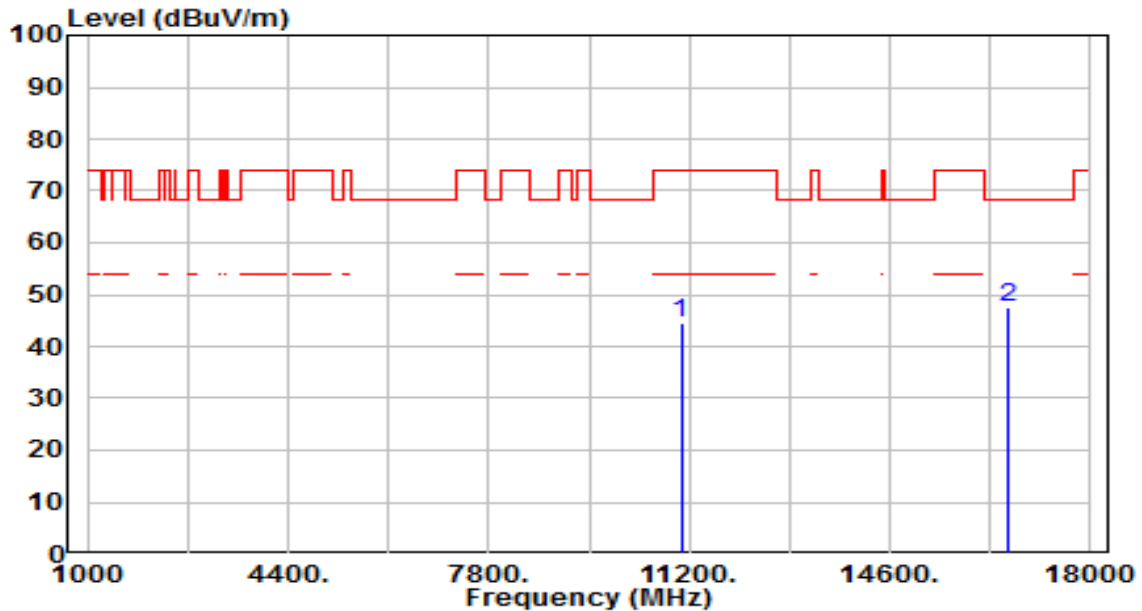


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	39.77	4.60	44.37	-29.63	74.00	200	349	Peak
2	*	16590.000	41.66	6.00	47.66	-20.54	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

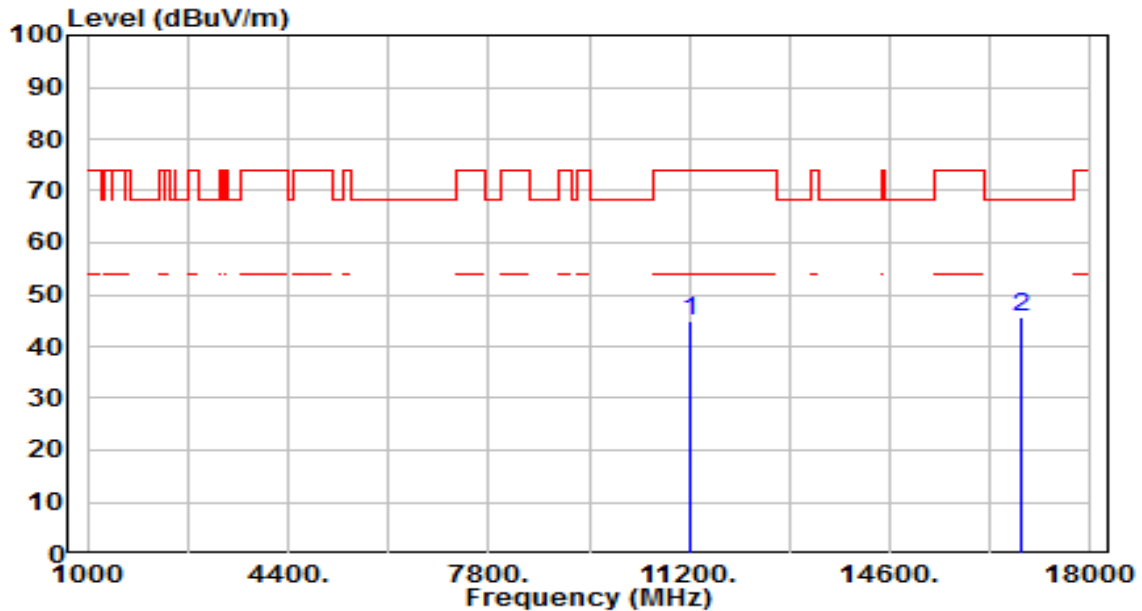


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	40.00	5.00	45.00	-29.00	74.00	200	171	Peak
2	*	16830.000	39.85	5.98	45.83	-22.37	68.20	200	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

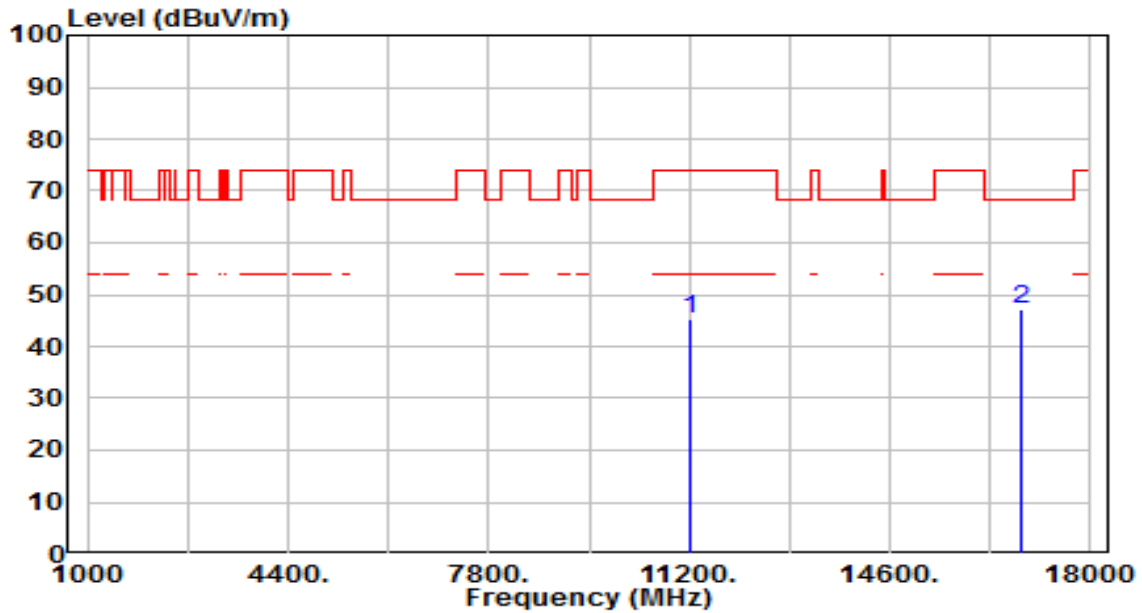


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	40.15	5.00	45.15	-28.85	74.00	200	72	Peak
2	*	16830.000	41.10	5.98	47.09	-21.11	68.20	200	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

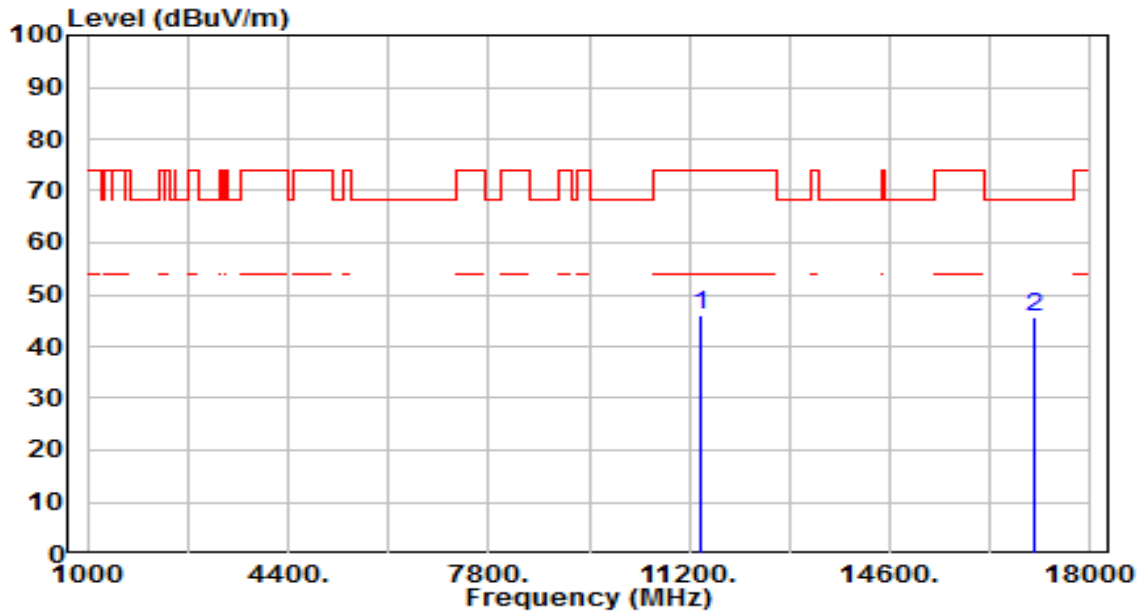


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	40.70	5.19	45.89	-28.11	74.00	200	229	Peak
2	*	17070.000	40.07	5.61	45.68	-22.52	68.20	200	49	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

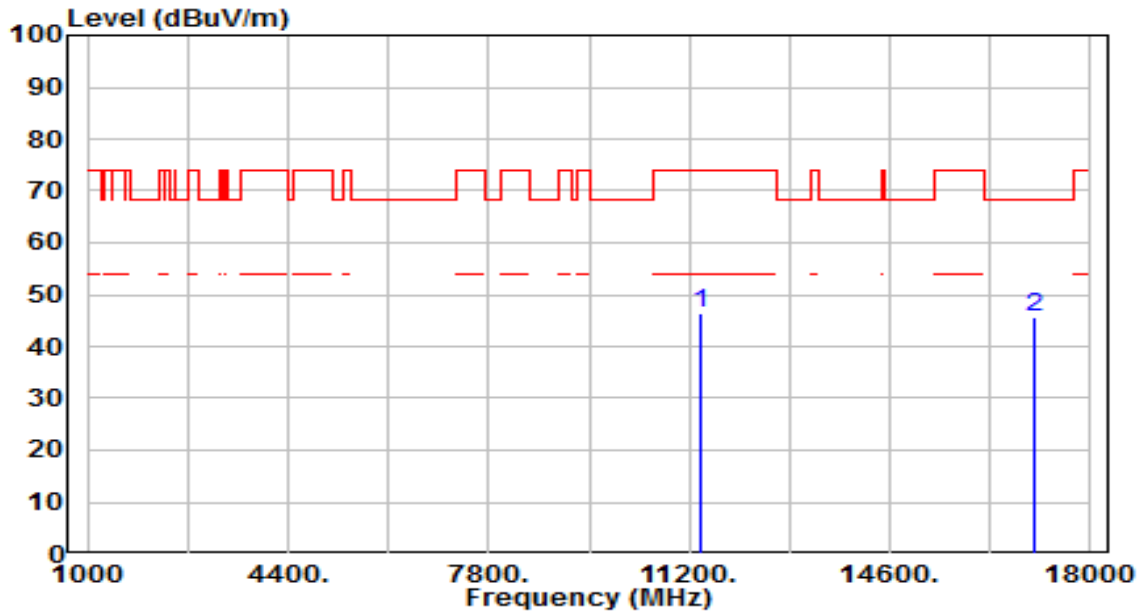


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.16	5.19	46.35	-27.65	74.00	200	69	Peak
2	*	17070.000	40.20	5.61	45.81	-22.39	68.20	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

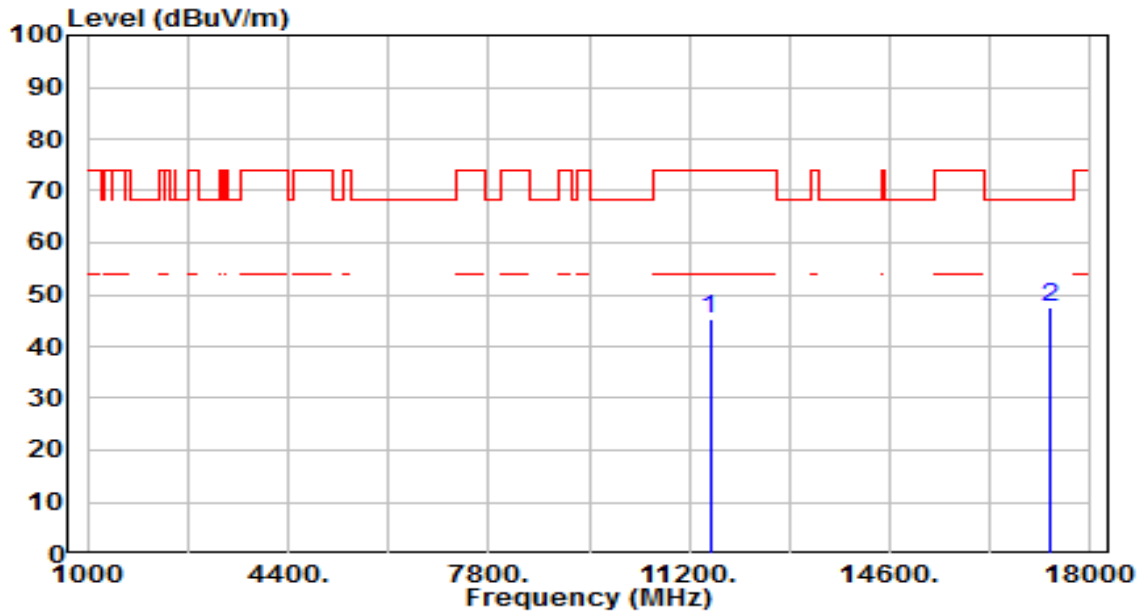


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	39.82	5.33	45.15	-28.85	74.00	200	232	Peak
2	*	17325.000	42.67	5.05	47.72	-20.48	68.20	200	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

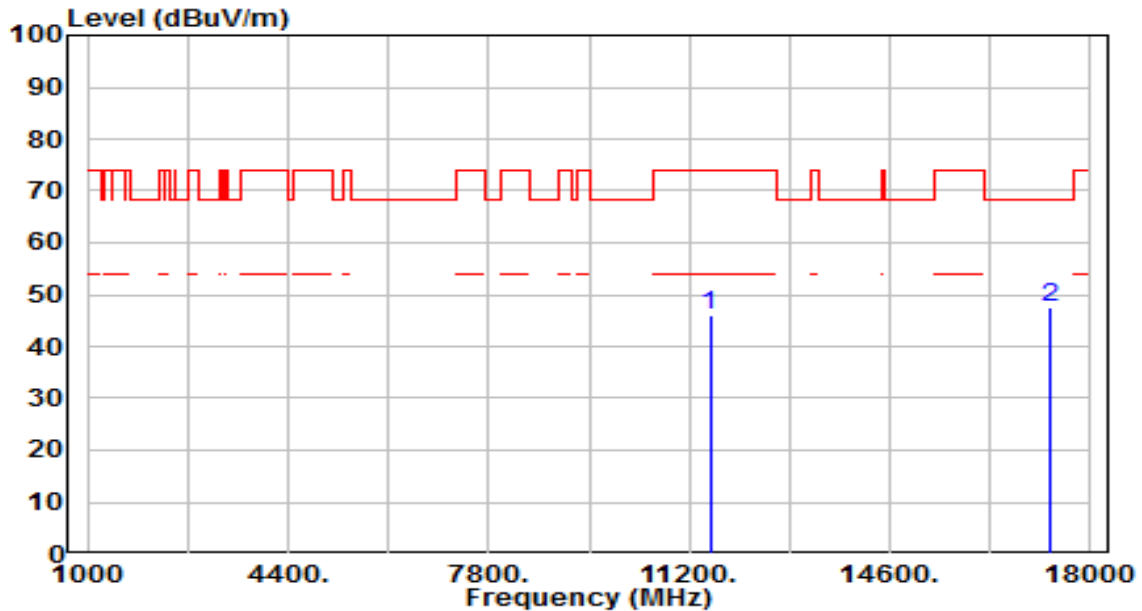


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	40.57	5.33	45.90	-28.10	74.00	200	0	Peak
2	*	17325.000	42.45	5.05	47.51	-20.69	68.20	200	72	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

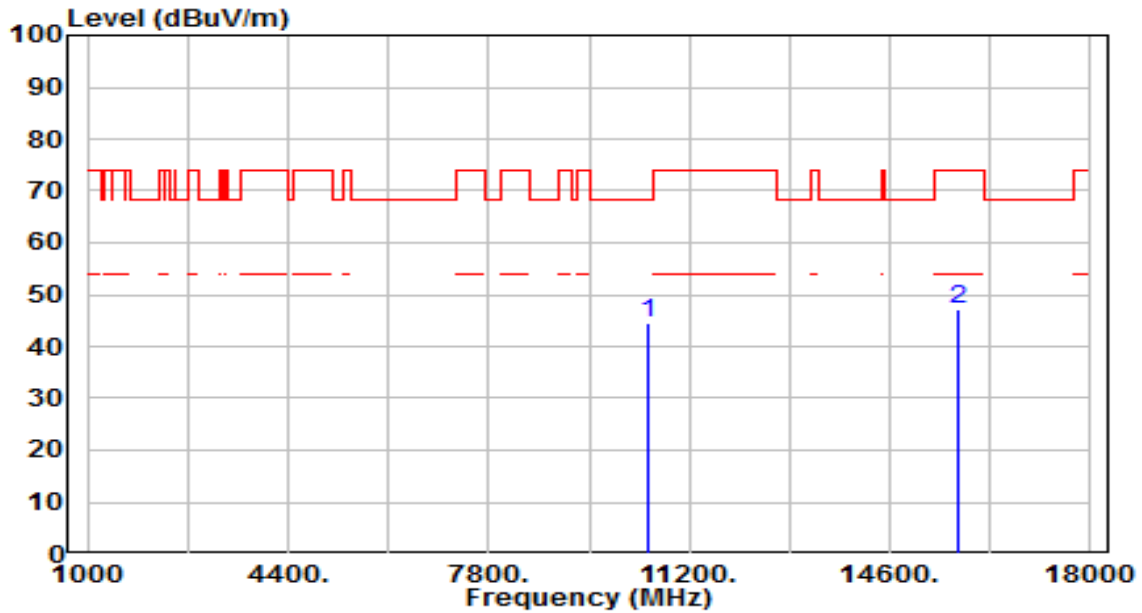


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.82	4.62	44.45	-23.75	68.20	200	331	Peak
2		15750.000	40.82	6.49	47.31	-26.69	74.00	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

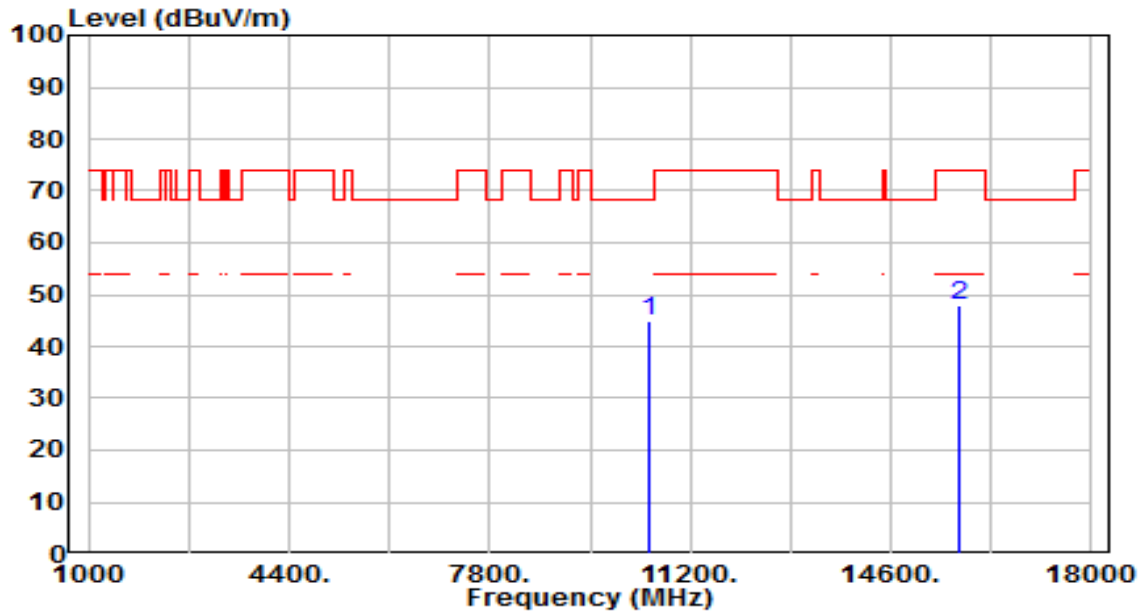


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.25	4.62	44.88	-23.32	68.20	200	360	Peak
2		15750.000	41.44	6.49	47.93	-26.07	74.00	200	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

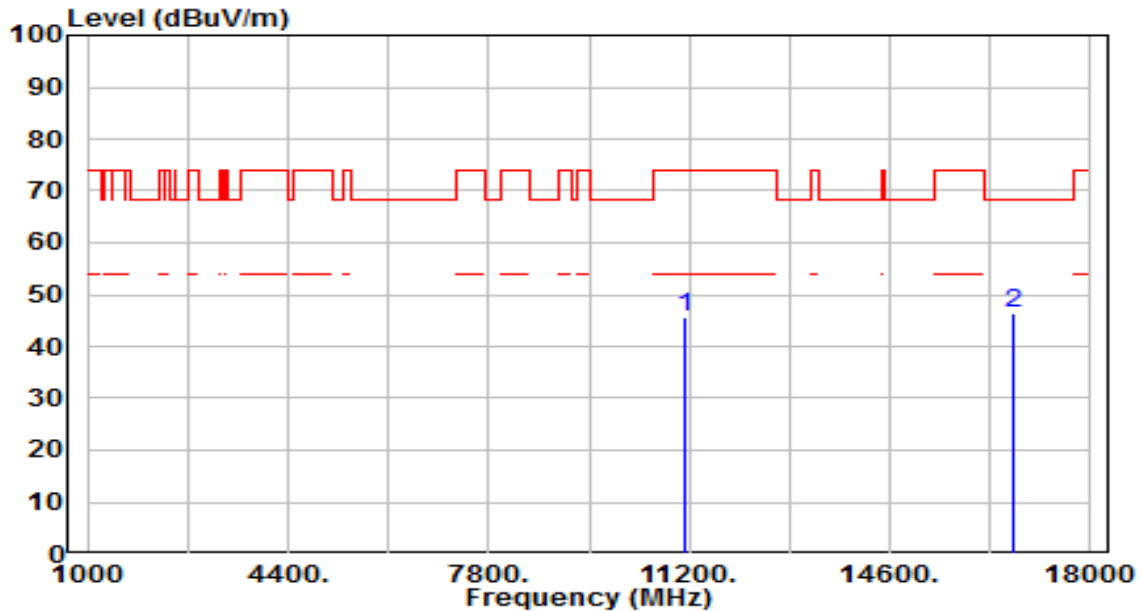


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	40.95	4.82	45.77	-28.23	74.00	200	0	Peak
2	*	16710.000	40.48	6.01	46.49	-21.71	68.20	200	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

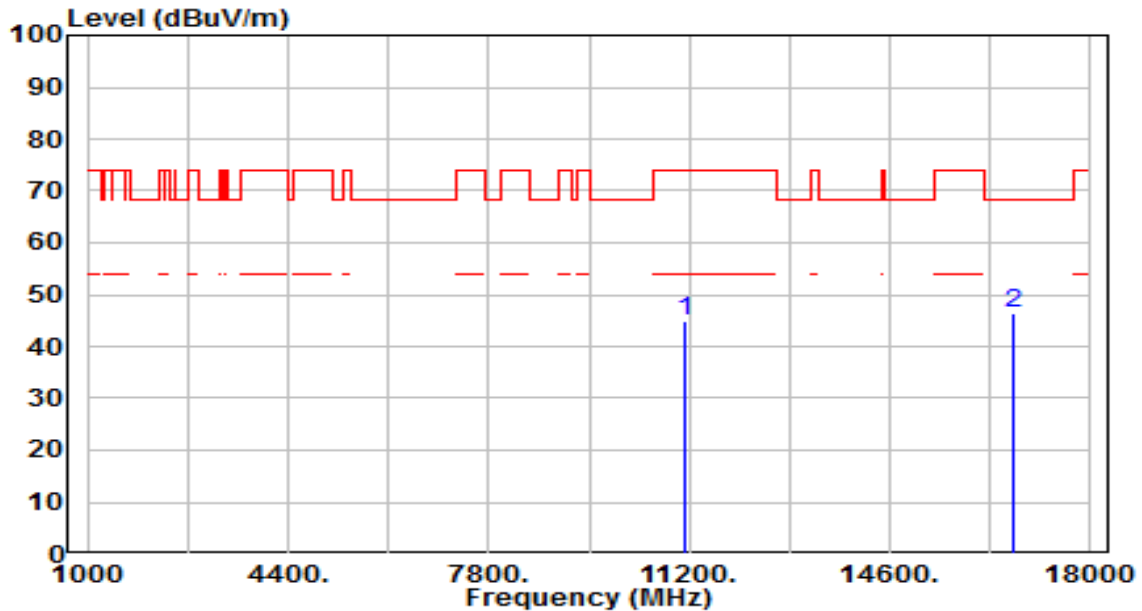


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	40.24	4.82	45.06	-28.94	74.00	200	250	Peak
2	* 16710.000	40.56	6.01	46.57	-21.63	68.20	200	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

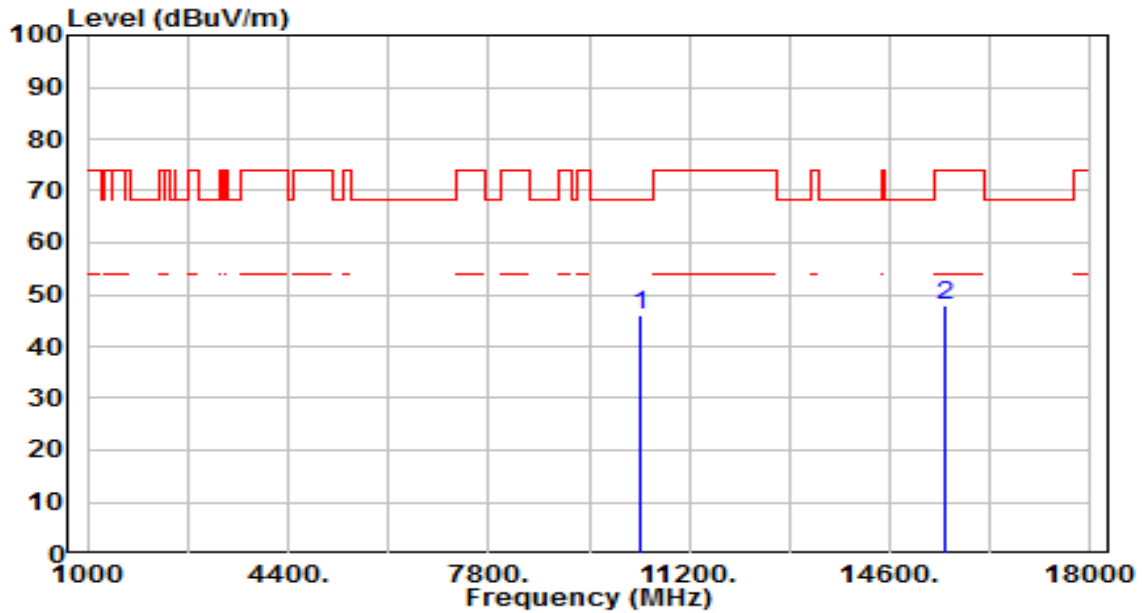


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.15	4.81	45.96	-22.24	68.20	200	58	Peak
2		15540.000	41.45	6.28	47.74	-26.26	74.00	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

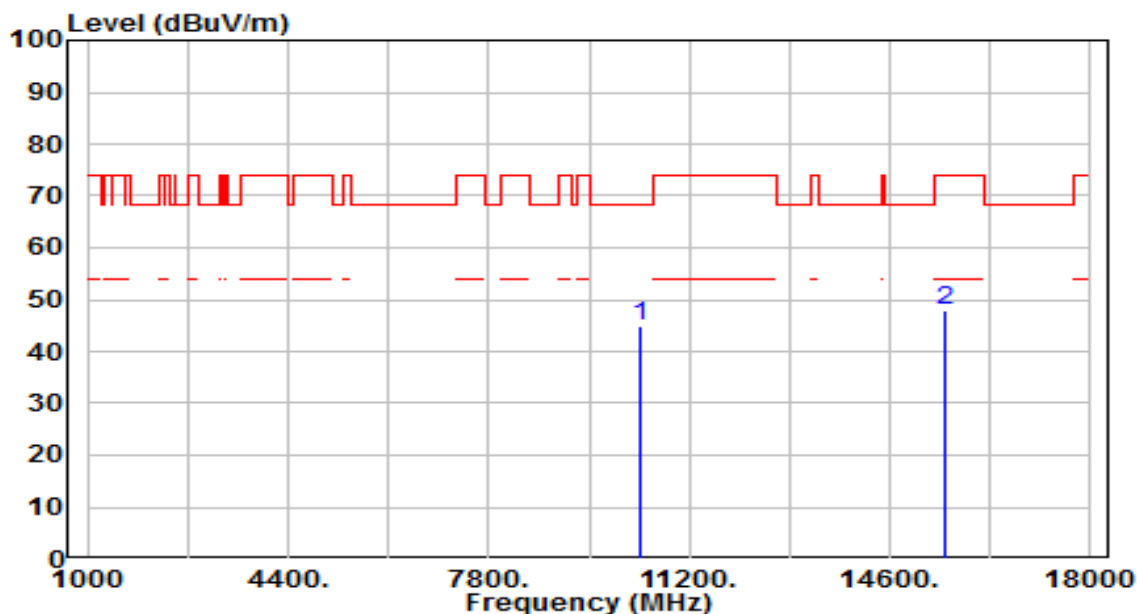


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	40.13	4.81	44.94	-23.26	68.20	100	233	Peak
2		15540.000	41.70	6.28	47.98	-26.02	74.00	200	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

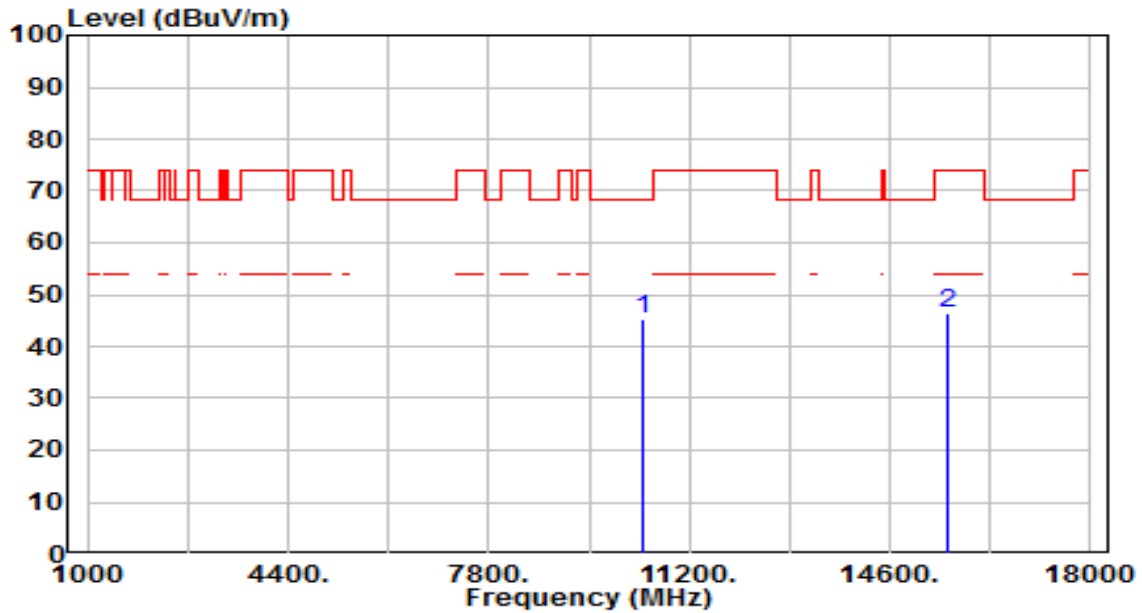


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	40.33	4.77	45.11	-23.09	68.20	200	140	Peak
2		15600.000	40.30	6.19	46.49	-27.51	74.00	200	257	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

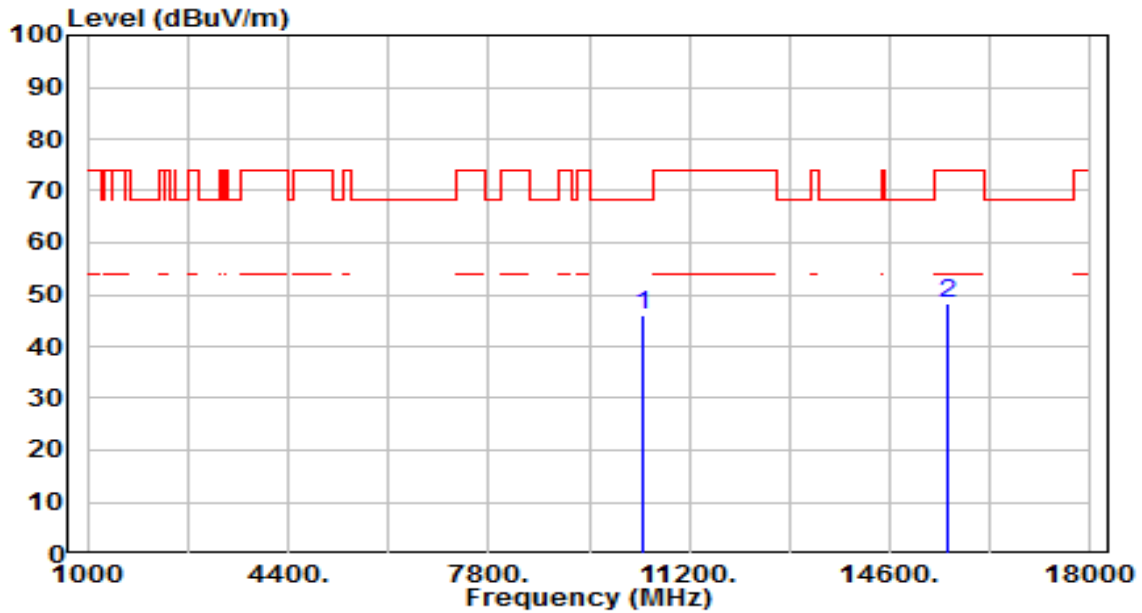


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.12	4.77	45.90	-22.30	68.20	200	305	Peak
2		15600.000	42.25	6.19	48.45	-25.55	74.00	200	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

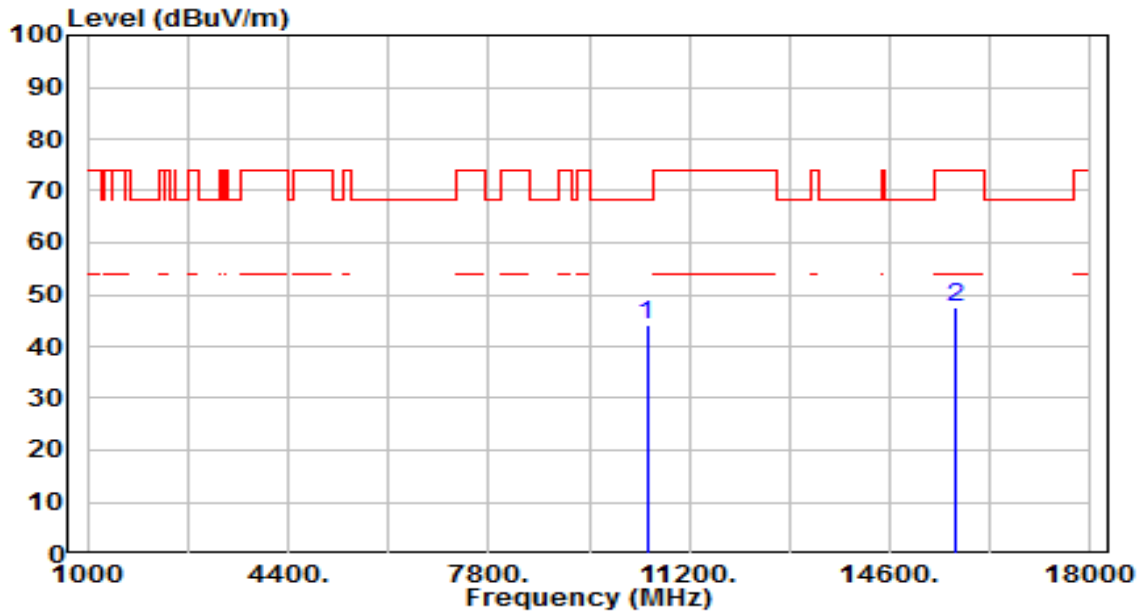


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	39.32	4.65	43.98	-24.22	68.20	200	251	Peak
2		15720.000	41.18	6.43	47.62	-26.38	74.00	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

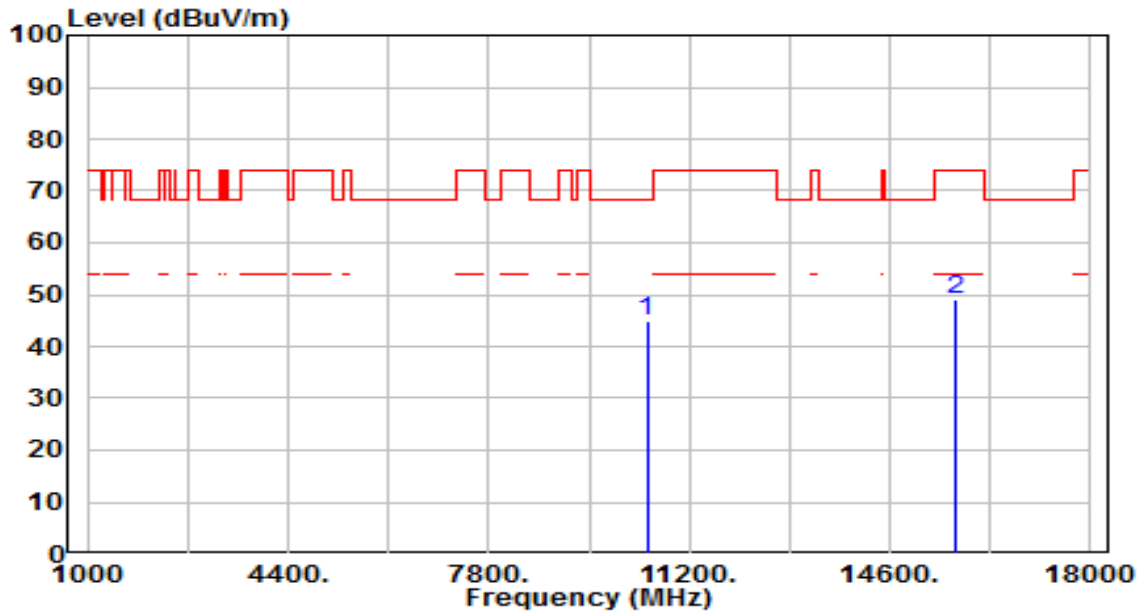


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	40.17	4.65	44.82	-23.38	68.20	200	360	Peak
2		15720.000	42.56	6.43	49.00	-25.00	74.00	200	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

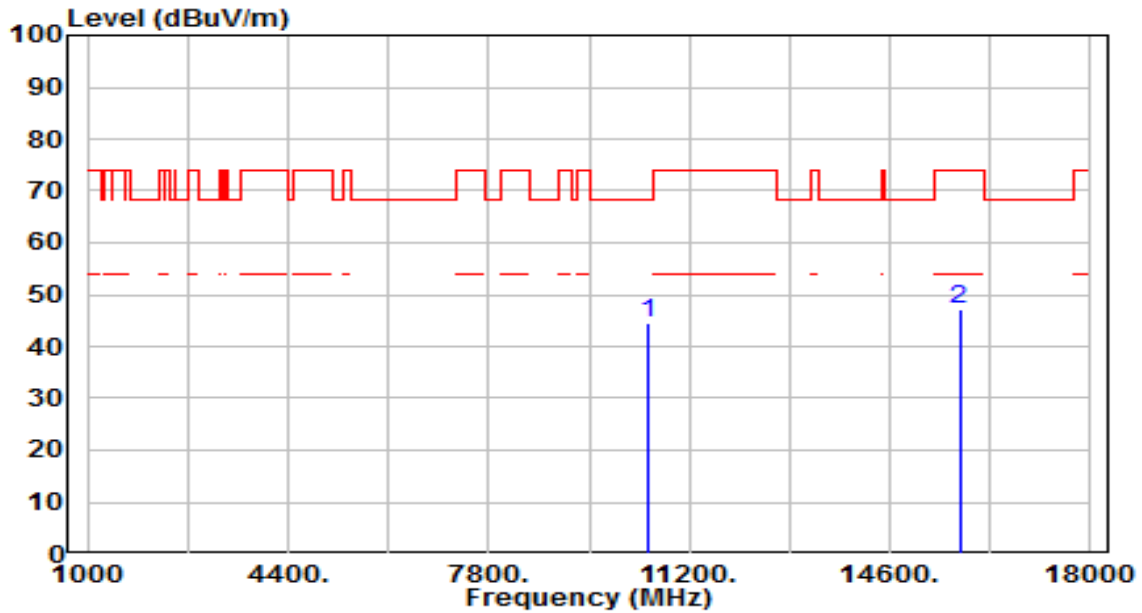


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	39.94	4.61	44.55	-23.65	68.20	200	117	Peak
2		15780.000	40.73	6.55	47.28	-26.72	74.00	200	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

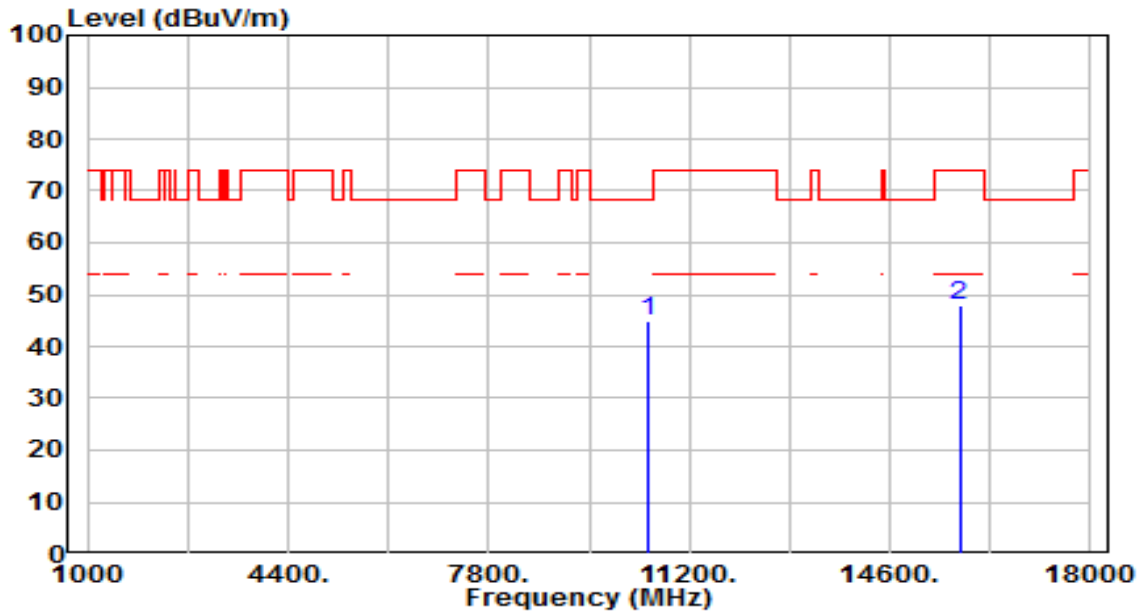


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	40.33	4.61	44.94	-23.26	68.20	200	360	Peak
2		15780.000	41.53	6.55	48.08	-25.92	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

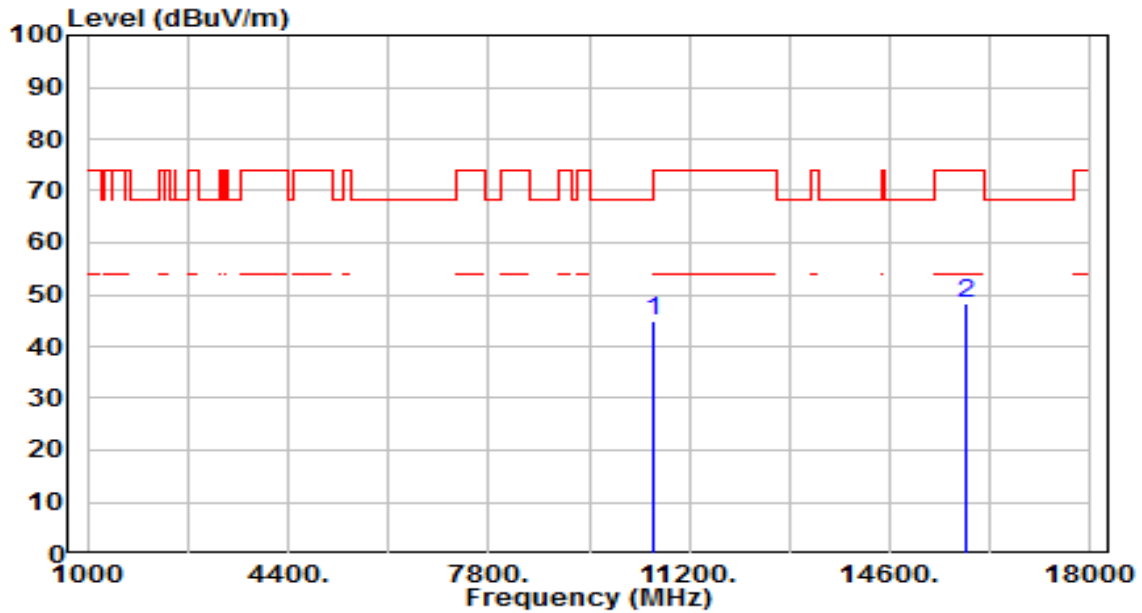


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	40.40	4.55	44.95	-23.25	68.20	200	289	Peak
2		15900.000	41.58	6.64	48.22	-25.78	74.00	200	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

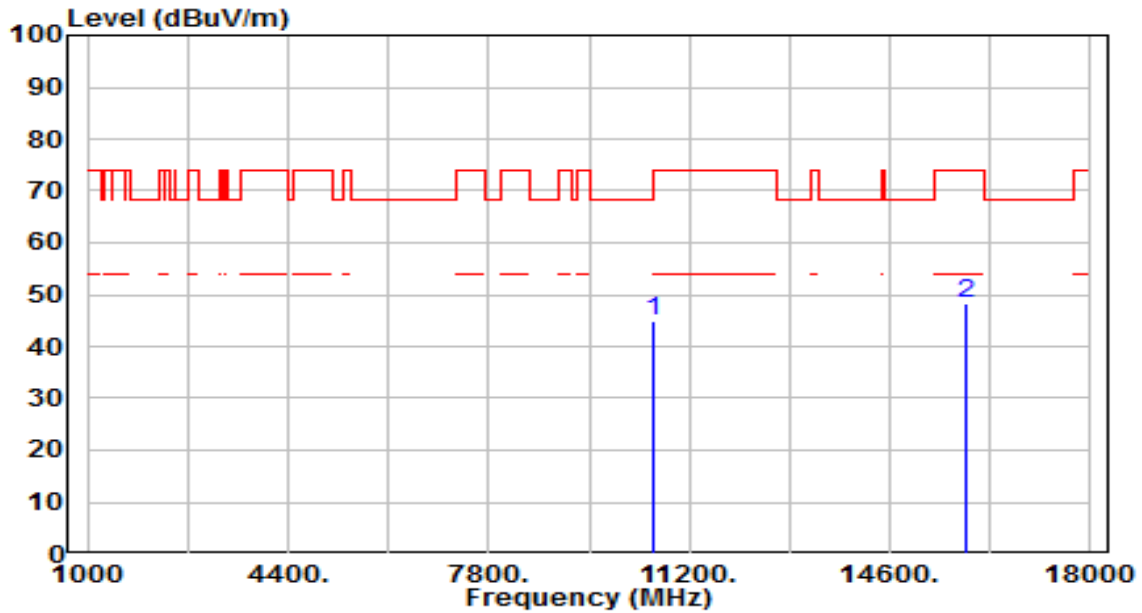


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	40.19	4.55	44.73	-23.47	68.20	200	165	Peak
2		15900.000	41.72	6.64	48.36	-25.64	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

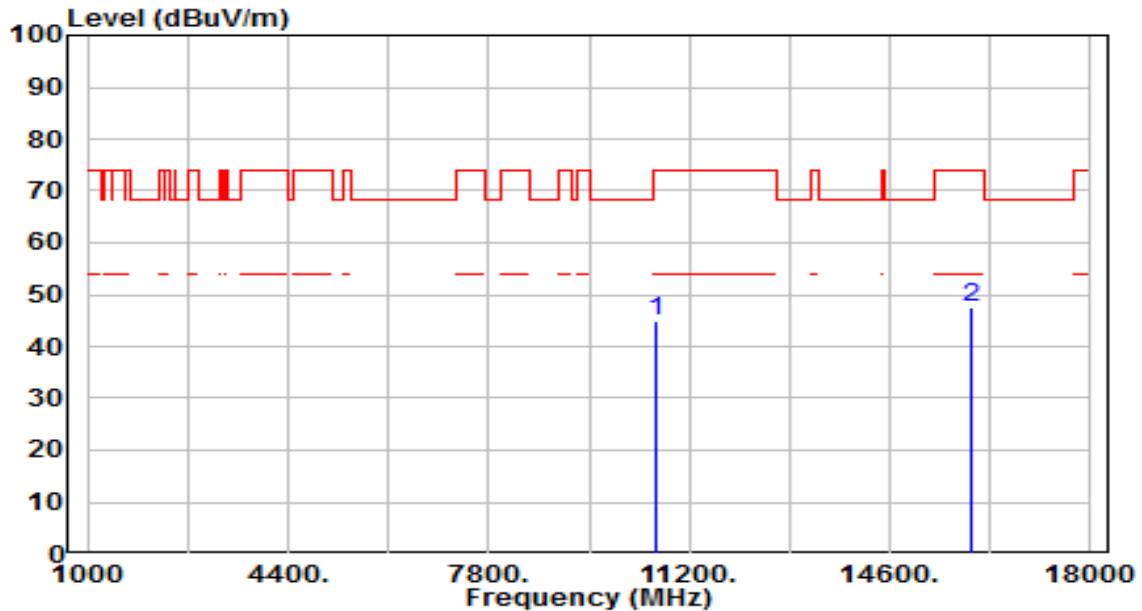


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	40.25	4.58	44.83	-29.17	74.00	200	324	Peak
2	* 15960.000	40.72	6.67	47.39	-26.61	74.00	200	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

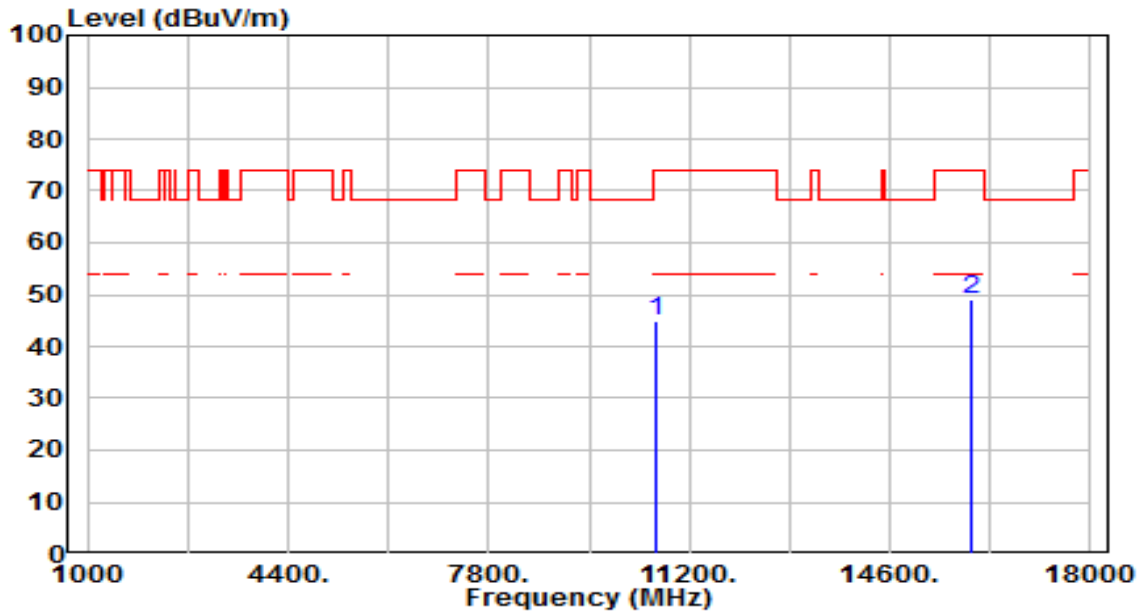


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	40.40	4.58	44.97	-29.03	74.00	200	142	Peak
2	*	15960.000	42.41	6.67	49.08	-24.92	74.00	200	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

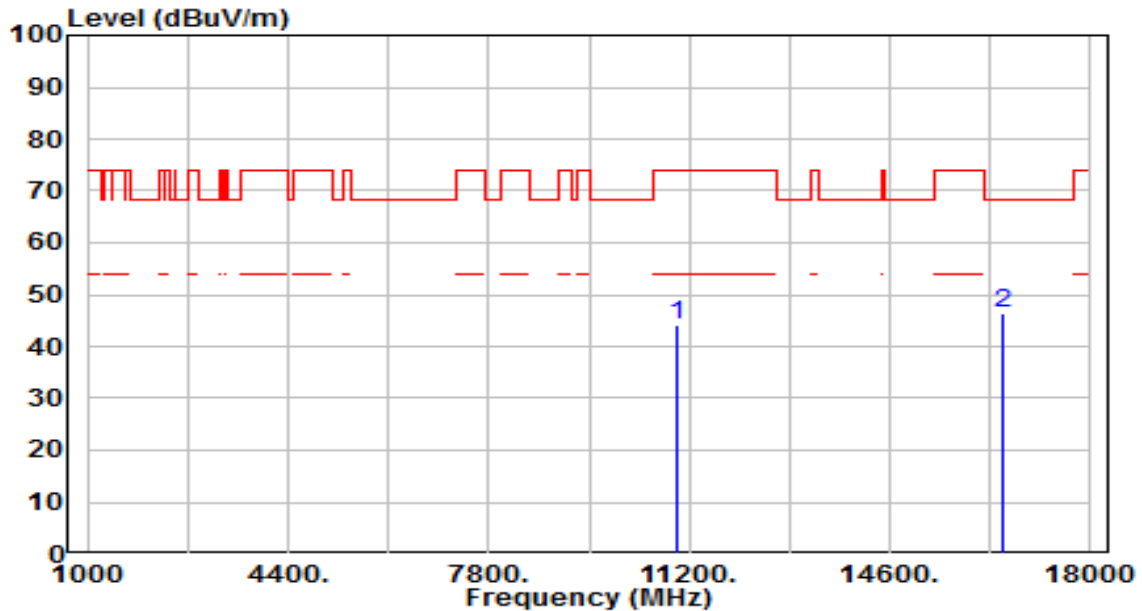


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	39.79	4.44	44.23	-29.77	74.00	200	0	Peak
2	*	16500.000	40.50	6.07	46.57	-21.63	68.20	200	41	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

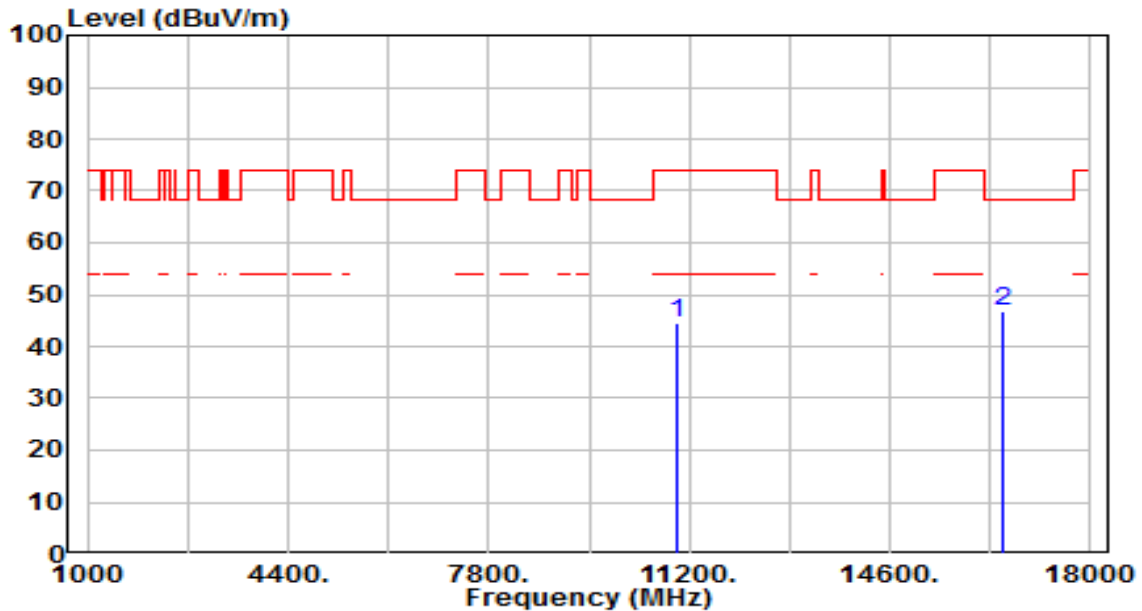


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	40.02	4.44	44.46	-29.54	74.00	200	229	Peak
2	*	16500.000	40.62	6.07	46.69	-21.51	68.20	200	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

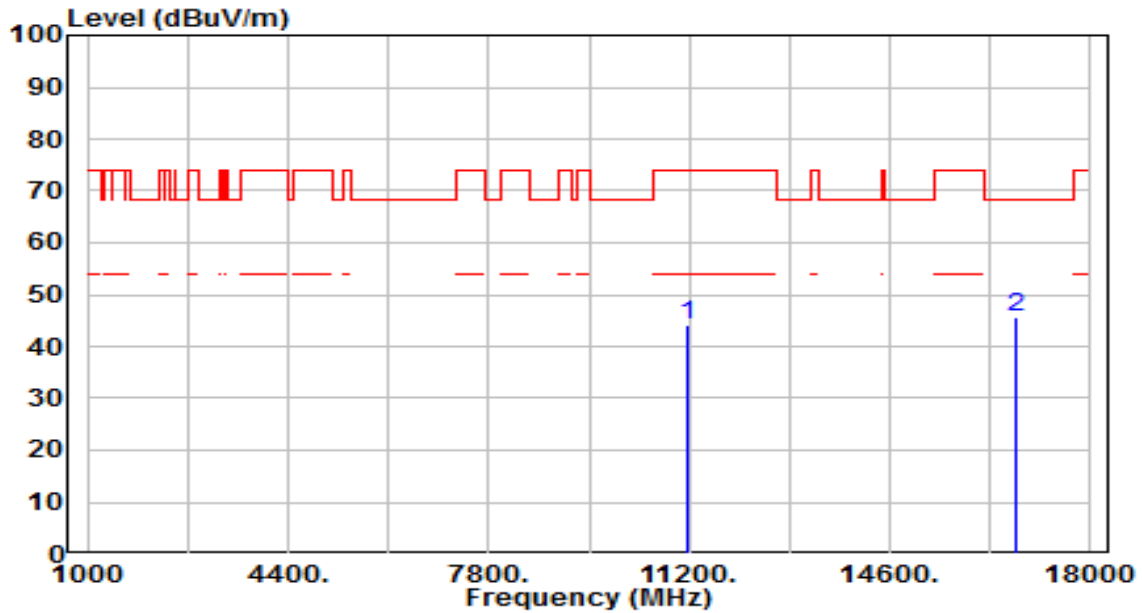


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	39.24	4.87	44.11	-29.89	74.00	0	0	Peak
2	*	16740.000	39.70	6.01	45.72	-22.48	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

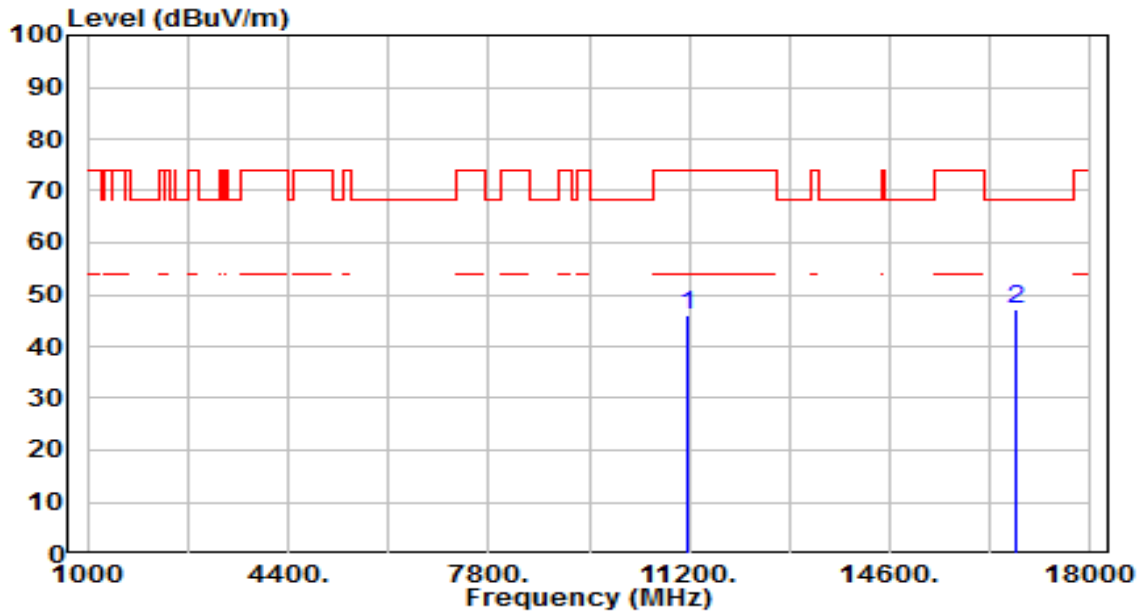


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.19	4.87	46.06	-27.94	74.00	200	221	Peak
2	*	16740.000	41.15	6.01	47.16	-21.04	68.20	200	337	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

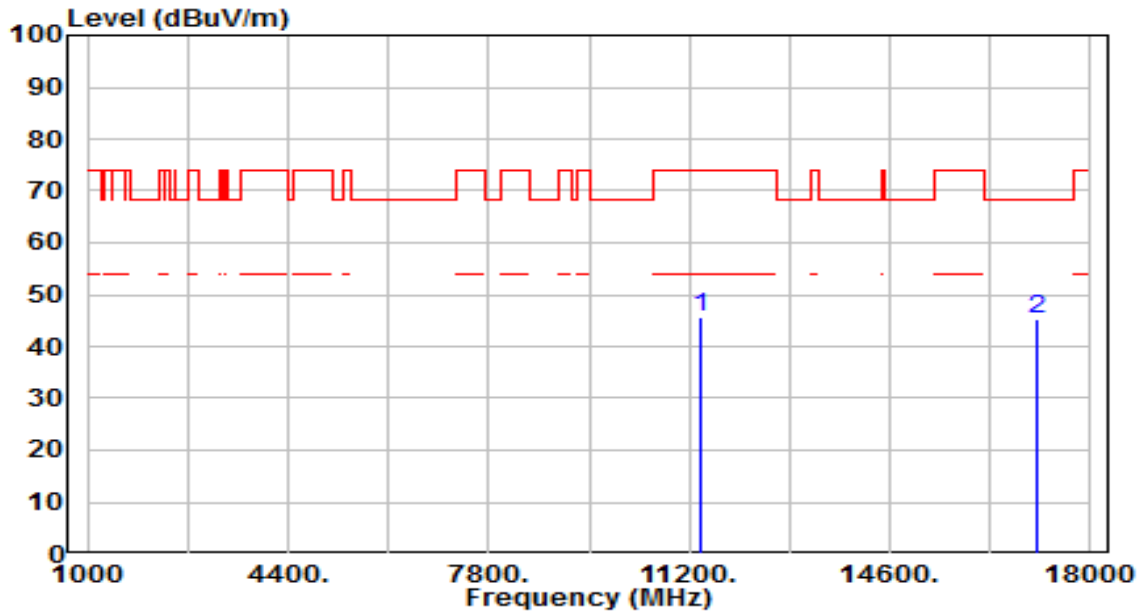


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	40.43	5.22	45.64	-28.36	74.00	200	324	Peak
2	*	17100.000	39.75	5.54	45.29	-22.91	68.20	200	137	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

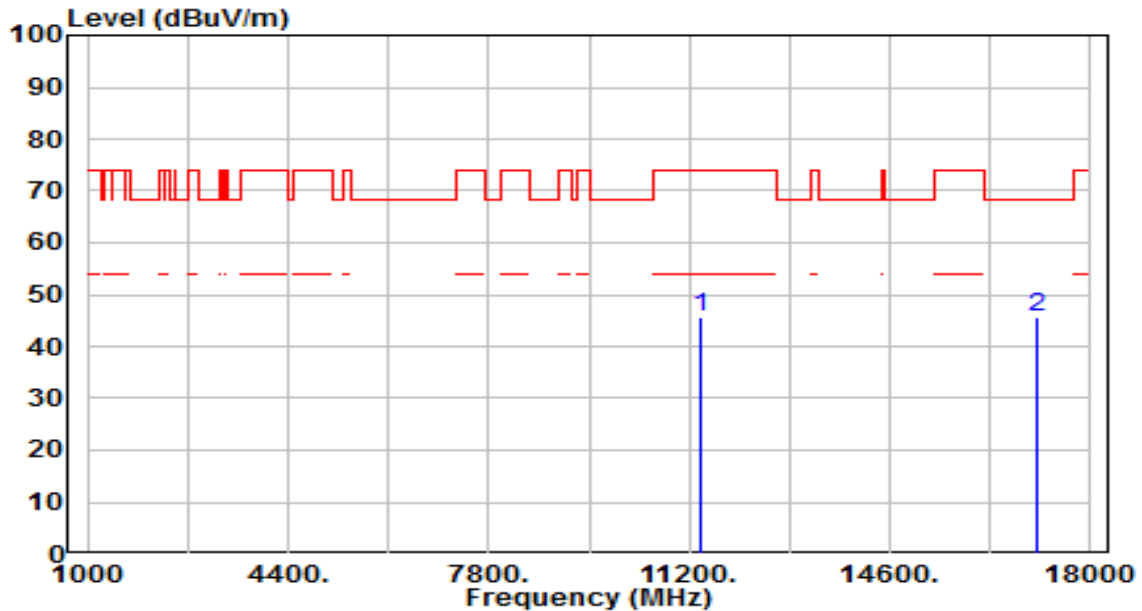


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	40.48	5.22	45.69	-28.31	74.00	200	244	Peak
2	*	17100.000	39.94	5.54	45.48	-22.72	68.20	200	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

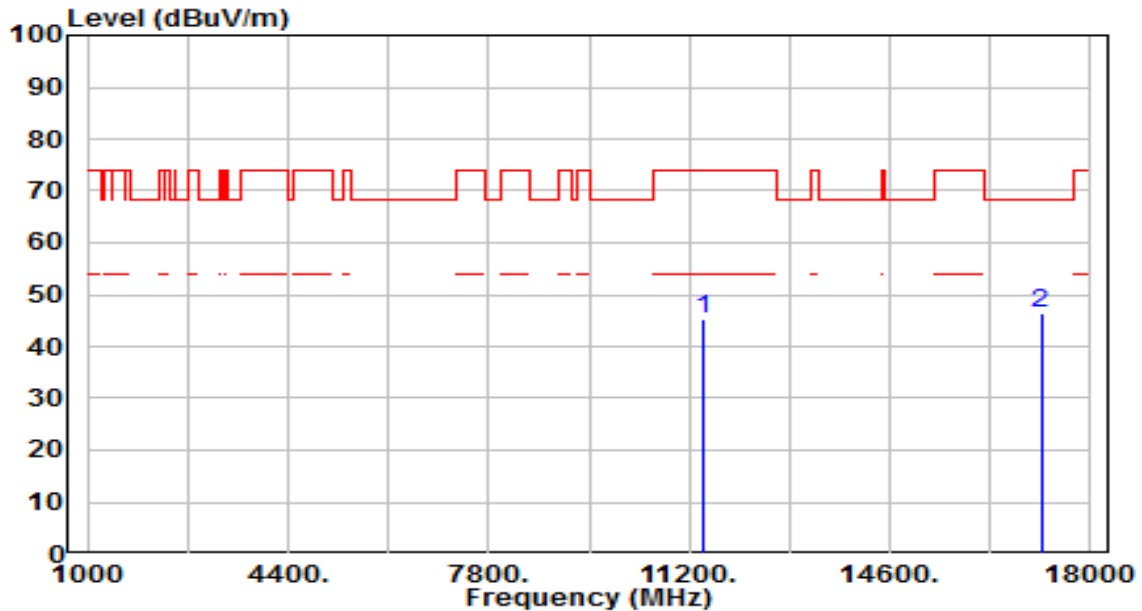


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	39.96	5.24	45.20	-28.80	74.00	200	125	Peak
2	*	17160.000	40.92	5.41	46.33	-21.87	68.20	200	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

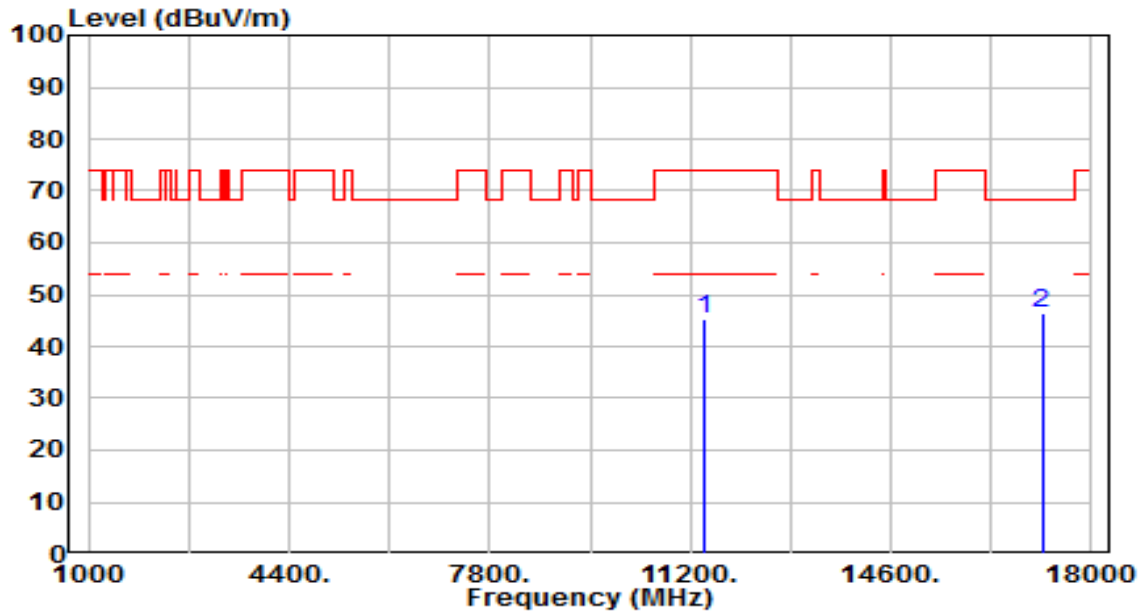


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	40.09	5.24	45.33	-28.67	74.00	200	224	Peak
2	*	17160.000	41.13	5.41	46.54	-21.66	68.20	200	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

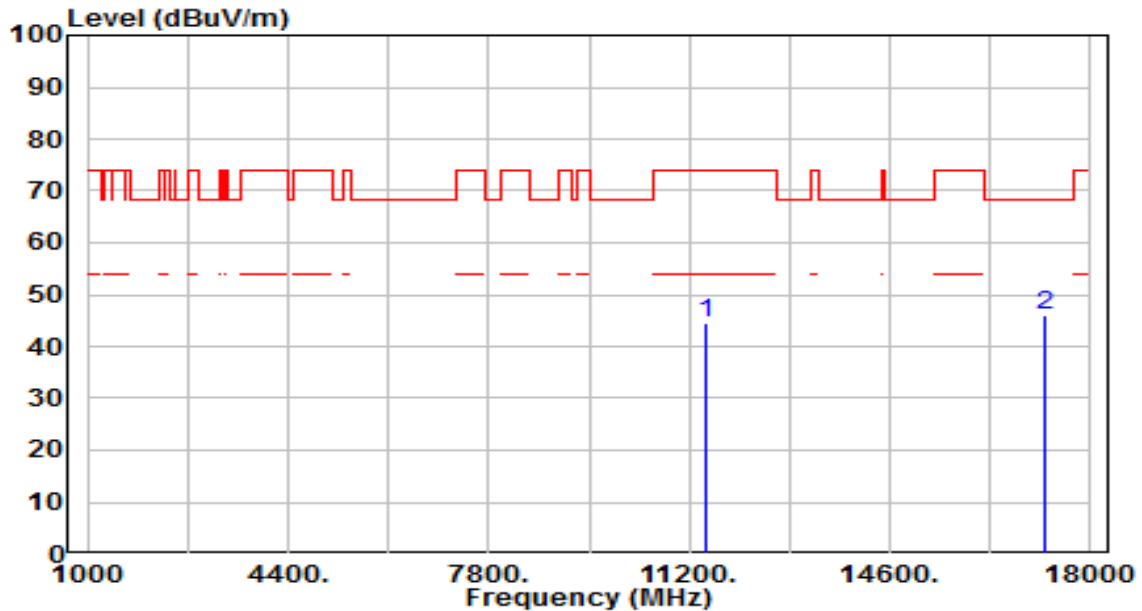


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	39.34	5.28	44.62	-29.38	74.00	200	251	Peak
2	*	17235.000	40.81	5.25	46.06	-22.14	68.20	200	96	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

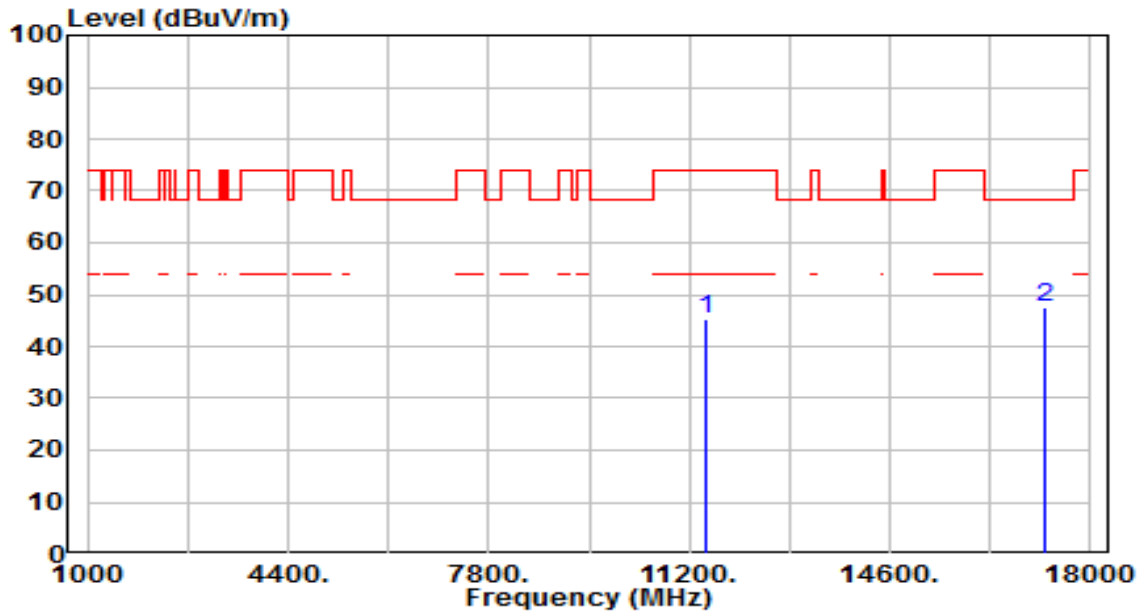


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	40.15	5.28	45.42	-28.58	74.00	200	238	Peak
2	*	17235.000	42.12	5.25	47.37	-20.83	68.20	200	101	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

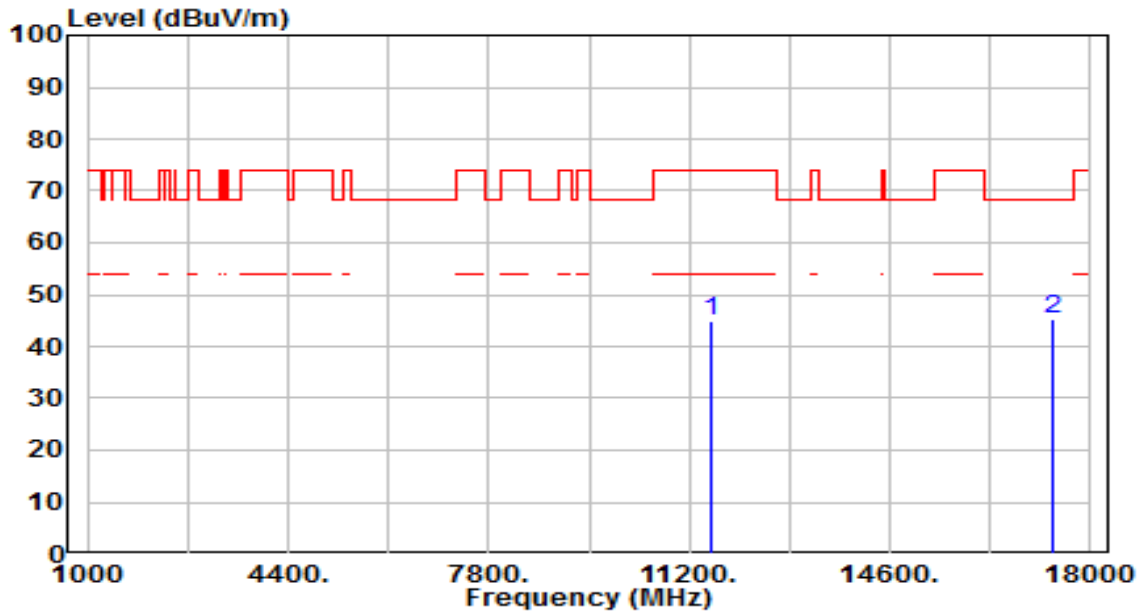


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	39.72	5.35	45.07	-28.93	74.00	200	303	Peak
2	*	17355.000	40.43	4.99	45.42	-22.78	68.20	200	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

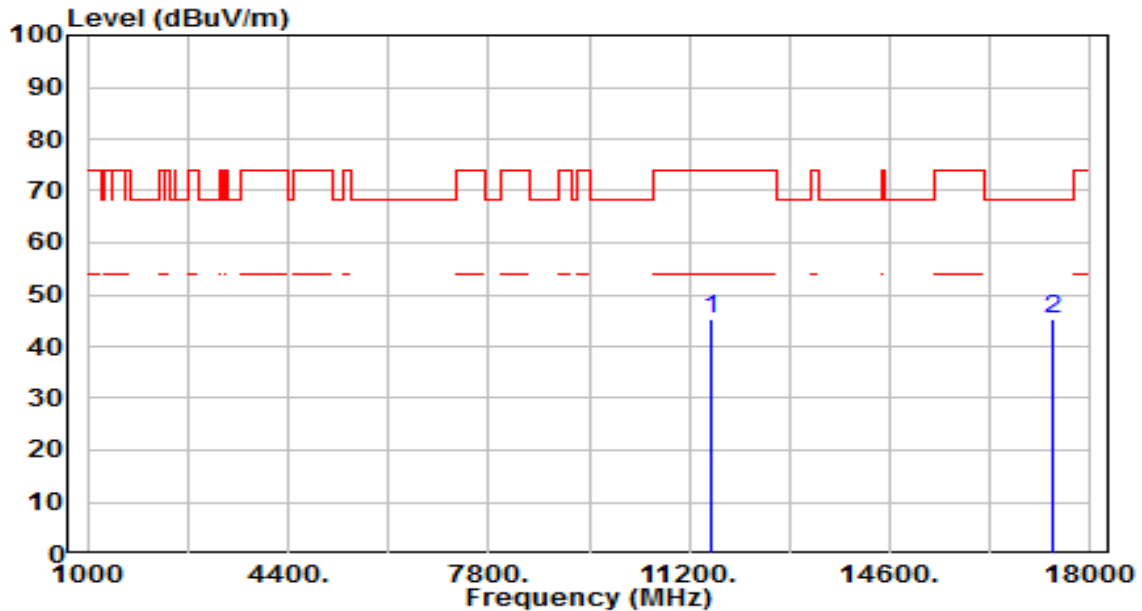


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	39.75	5.35	45.10	-28.90	74.00	200	288	Peak
2	*	17355.000	40.47	4.99	45.45	-22.75	68.20	200	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

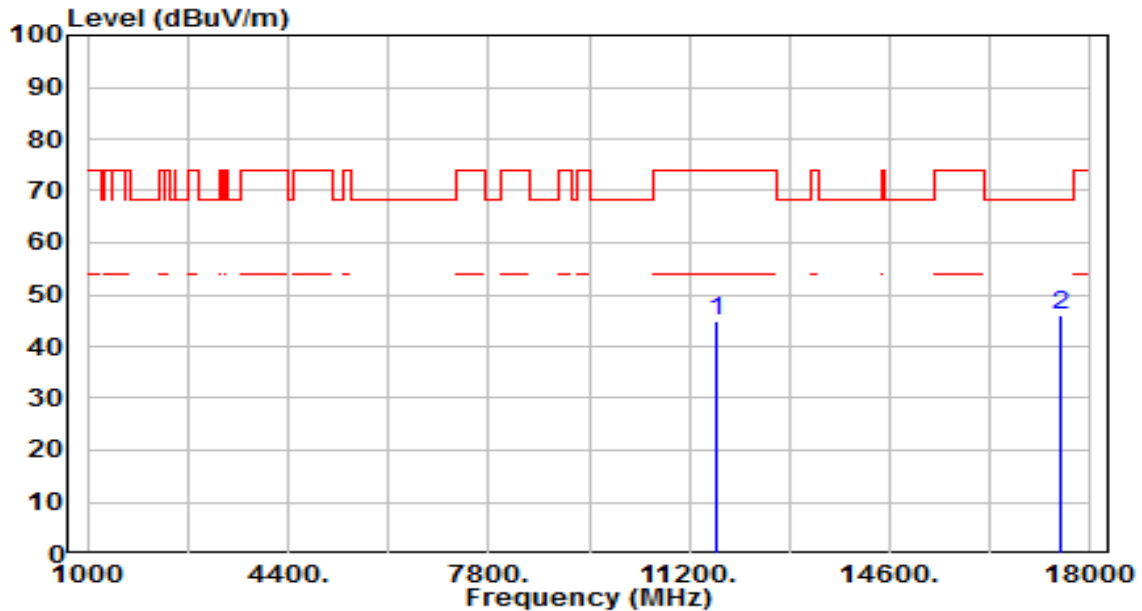


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	39.66	5.37	45.03	-28.97	74.00	200	186	Peak
2	*	17475.000	40.99	5.02	46.01	-22.19	68.20	200	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

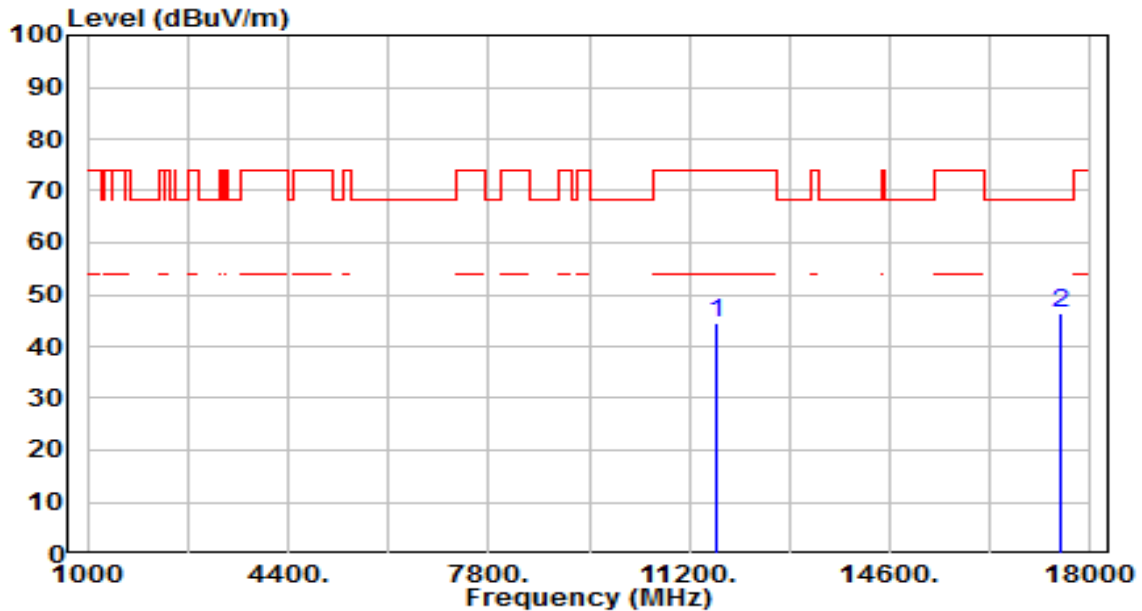


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	39.17	5.37	44.55	-29.45	74.00	200	331	Peak
2	*	17475.000	41.28	5.02	46.30	-21.90	68.20	200	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

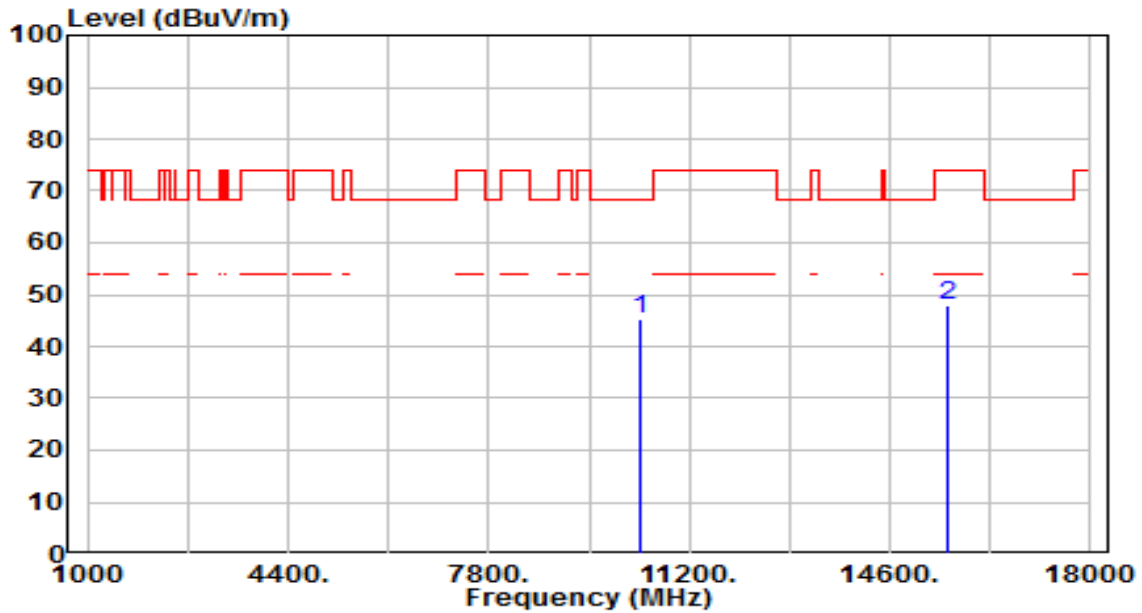


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	40.31	4.79	45.11	-23.09	68.20	200	140	Peak
2		15570.000	41.52	6.24	47.76	-26.24	74.00	200	286	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

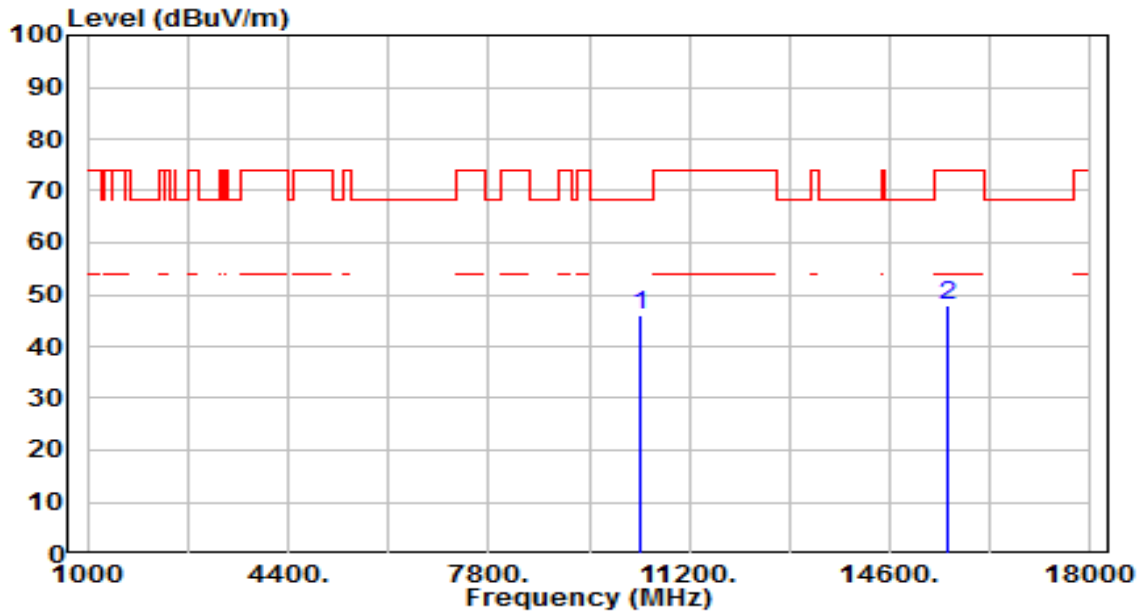


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.11	4.79	45.90	-22.30	68.20	200	305	Peak
2		15570.000	41.53	6.24	47.77	-26.23	74.00	200	221	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

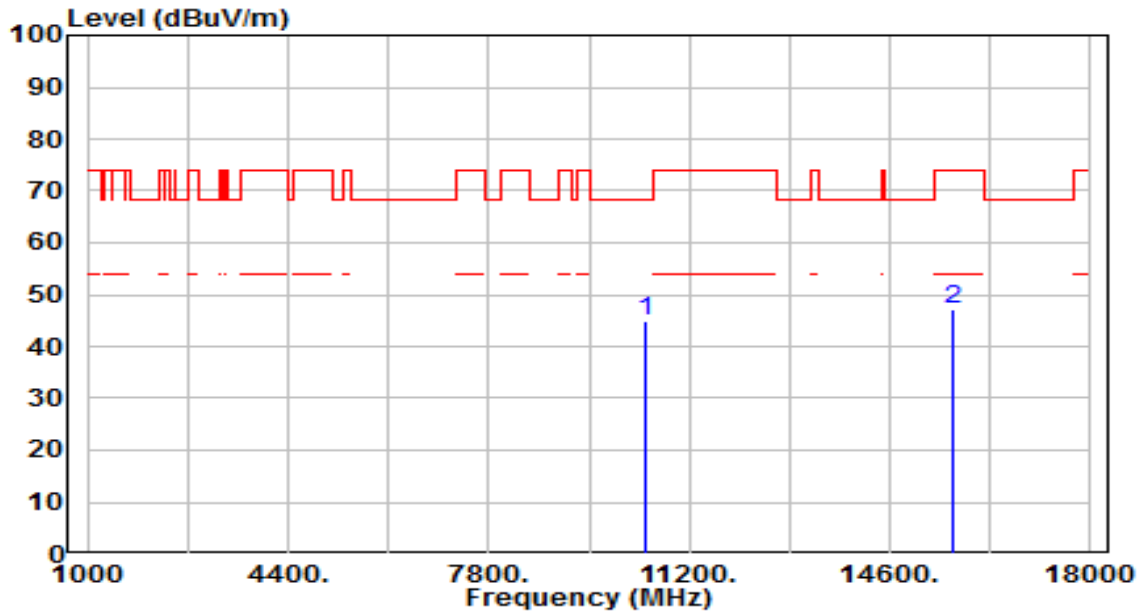


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	40.05	4.68	44.73	-23.47	68.20	200	204	Peak
2		15690.000	40.86	6.37	47.23	-26.77	74.00	200	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

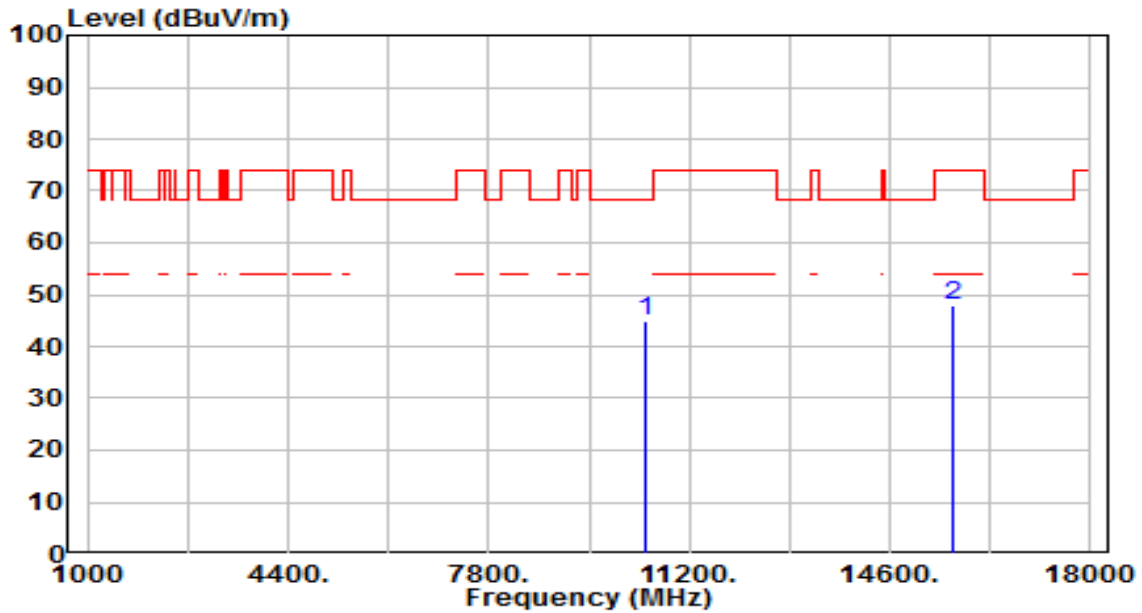


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	40.14	4.68	44.82	-23.38	68.20	200	360	Peak
2		15690.000	41.46	6.37	47.83	-26.17	74.00	200	258	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

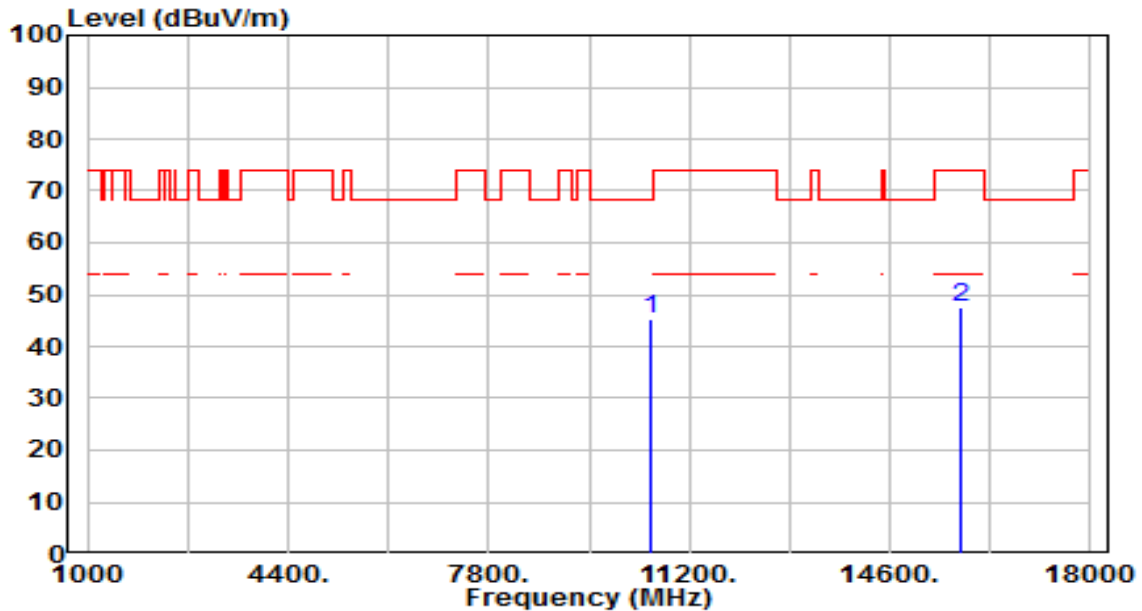


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	40.52	4.59	45.12	-23.08	68.20	200	257	Peak
2		15810.000	41.00	6.60	47.59	-26.41	74.00	200	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

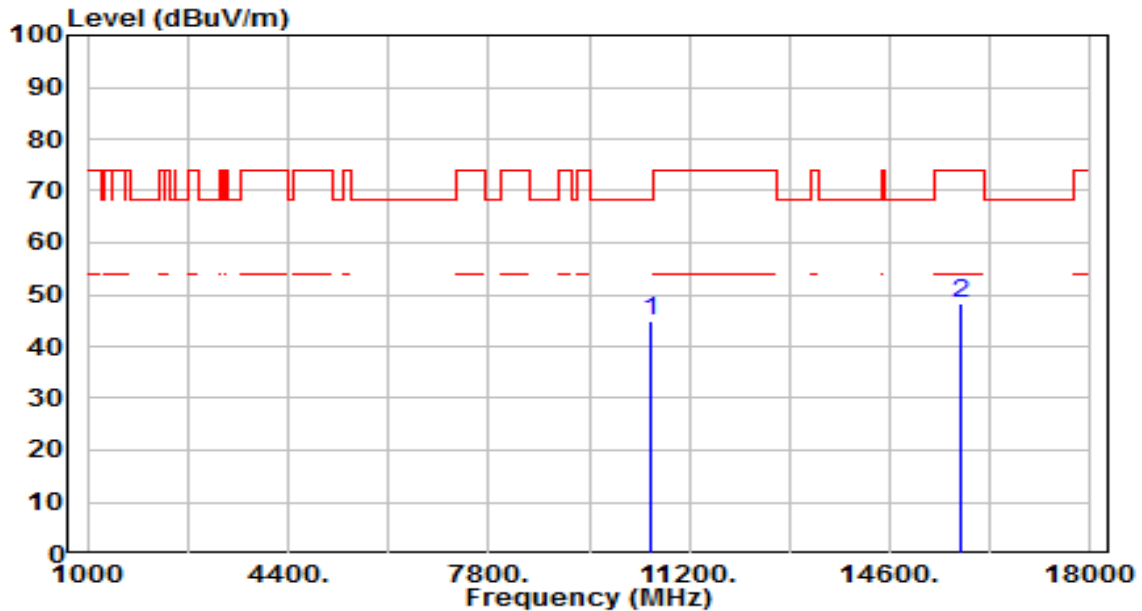


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	40.45	4.59	45.05	-23.15	68.20	200	66	Peak
2		15810.000	41.60	6.60	48.20	-25.80	74.00	200	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

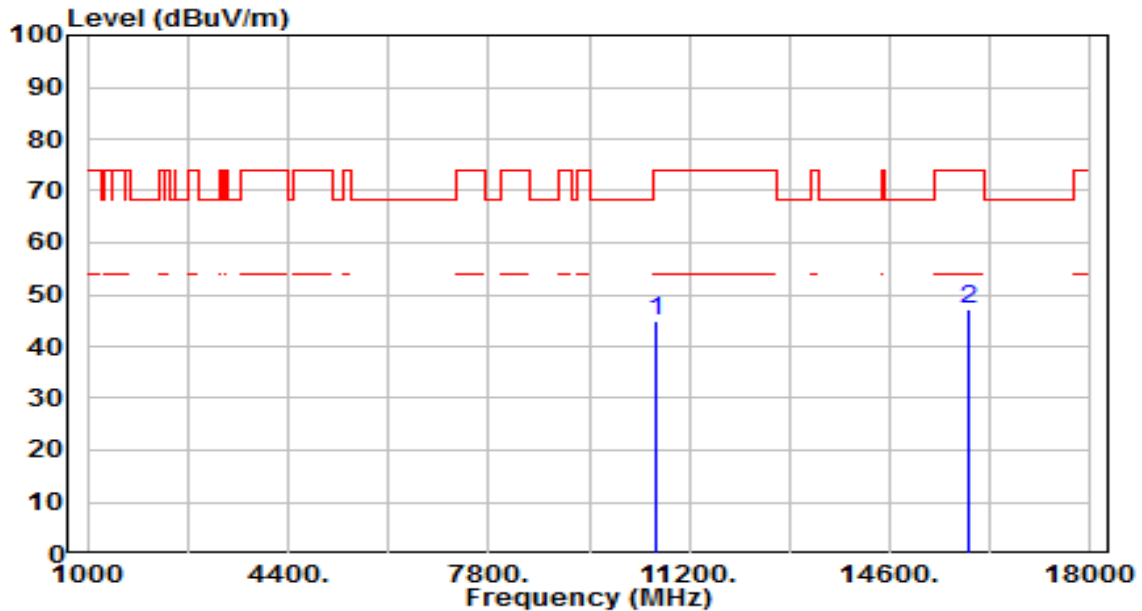


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	40.33	4.56	44.89	-29.11	74.00	200	128	Peak
2	*	15930.000	40.64	6.66	47.29	-26.71	74.00	200	234	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

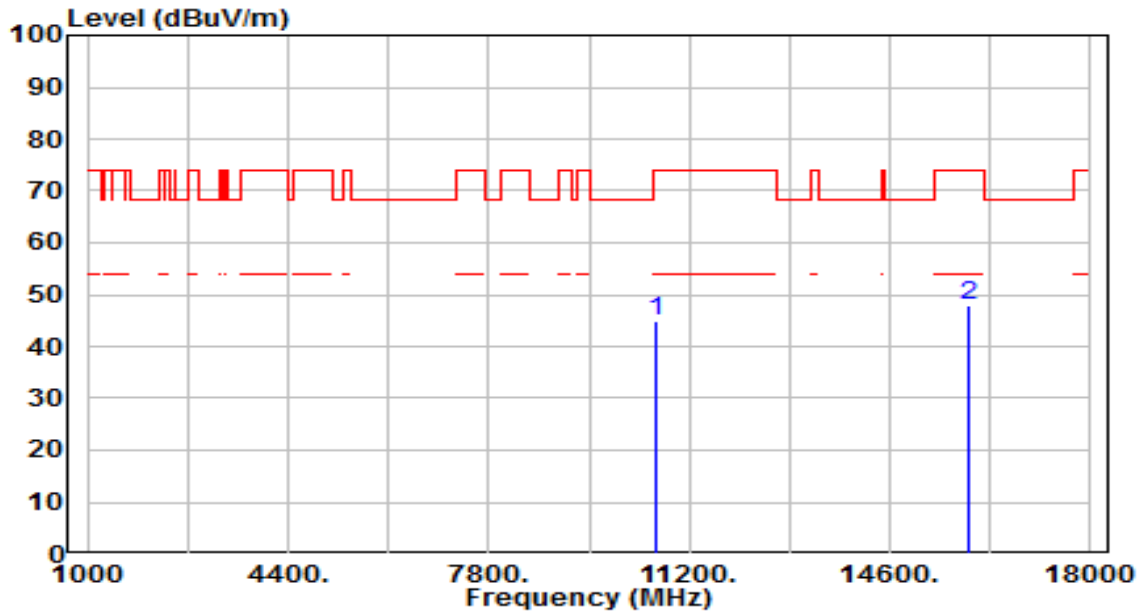


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	40.34	4.56	44.90	-29.10	74.00	200	107	Peak
2	* 15930.000	41.36	6.66	48.01	-25.99	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

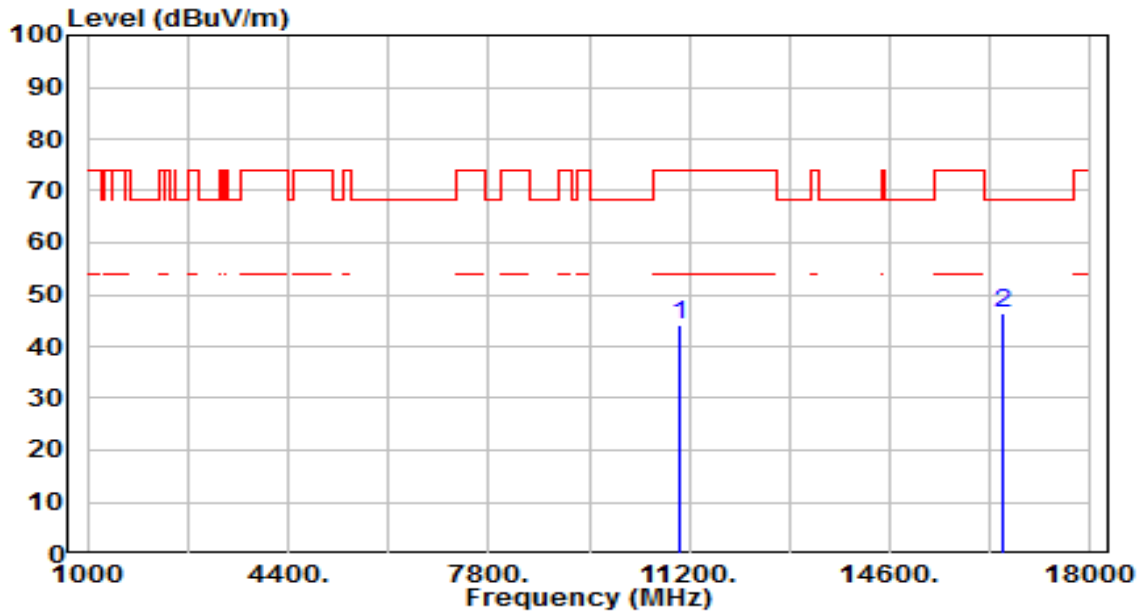


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	39.73	4.49	44.23	-29.77	74.00	200	0	Peak
2	*	16530.000	40.52	6.05	46.57	-21.63	68.20	200	41	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

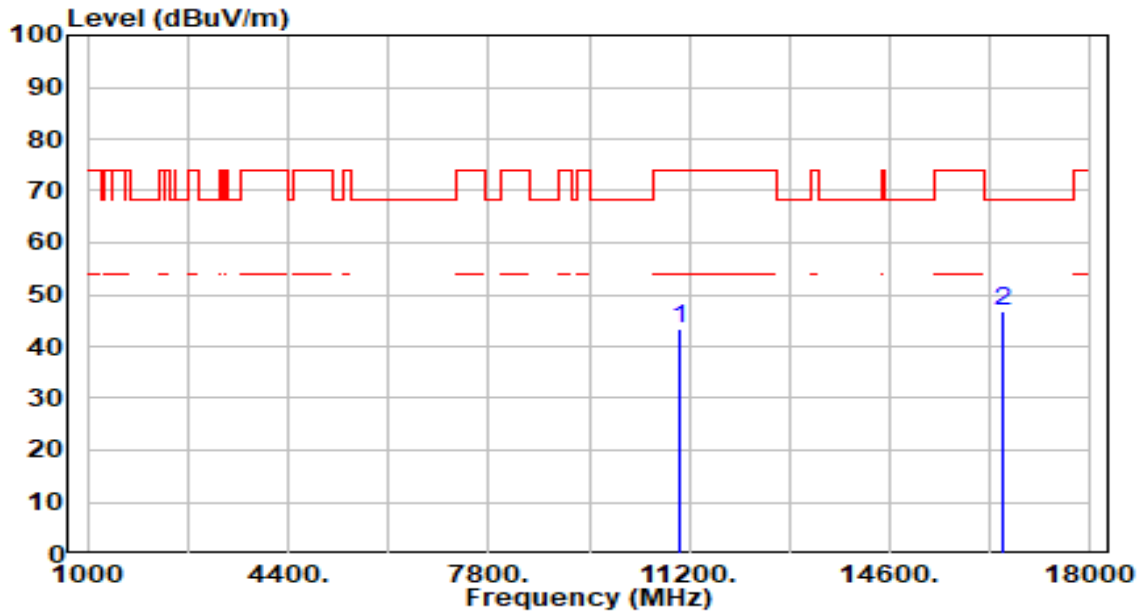


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	39.05	4.49	43.55	-30.45	74.00	200	126	Peak
2	*	16530.000	40.85	6.05	46.89	-21.31	68.20	200	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

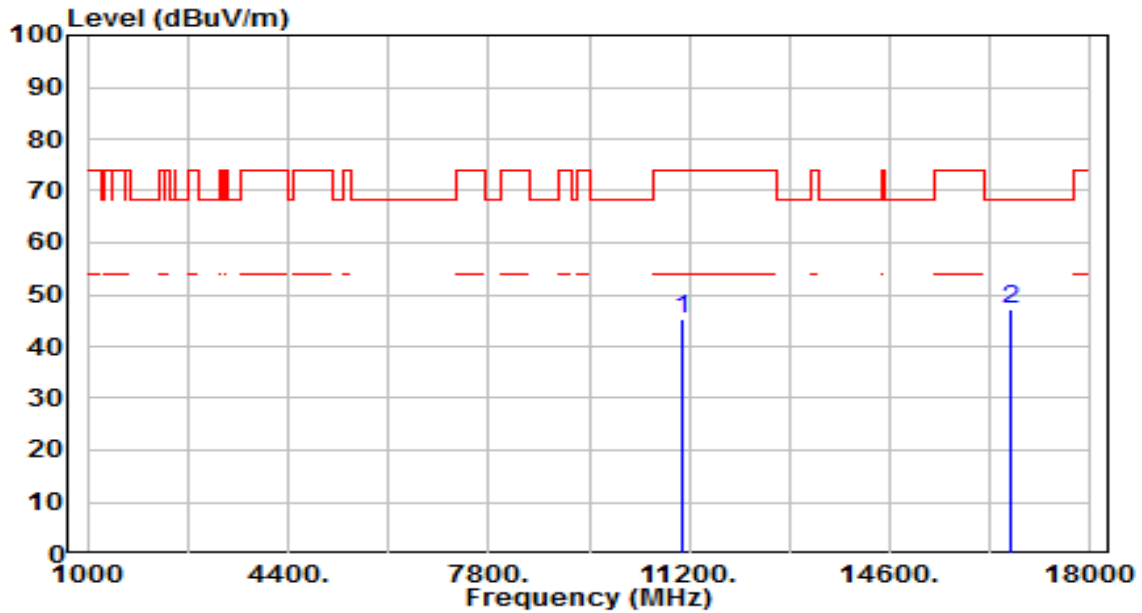


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	40.39	4.71	45.10	-28.90	74.00	200	312	Peak
2	*	16650.000	41.26	6.00	47.25	-20.95	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

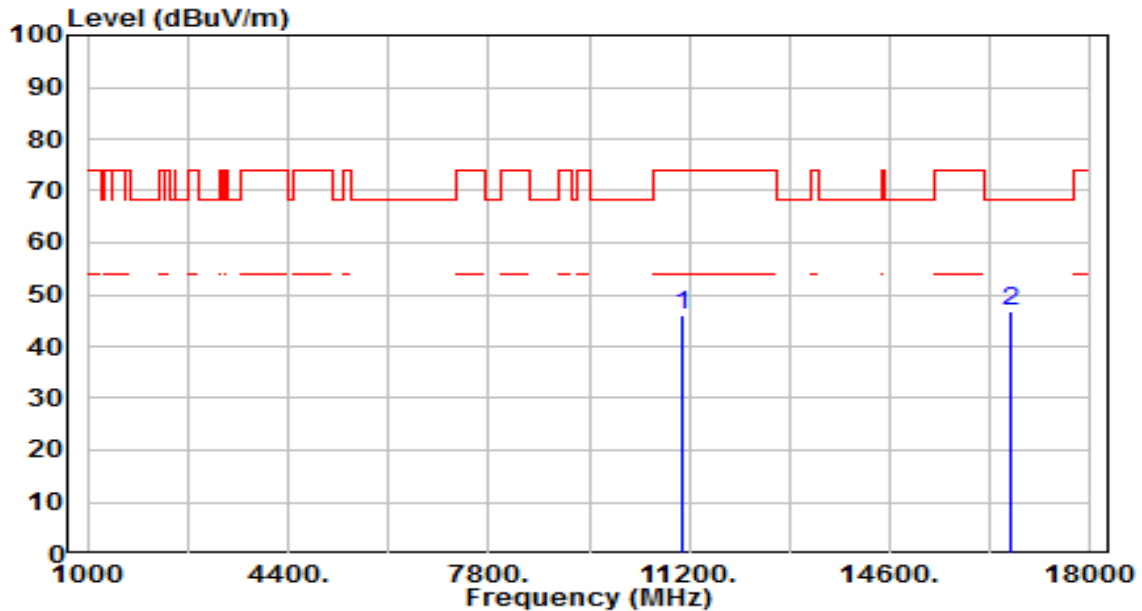


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.46	4.71	46.17	-27.83	74.00	200	241	Peak
2	*	16650.000	40.81	6.00	46.80	-21.40	68.20	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

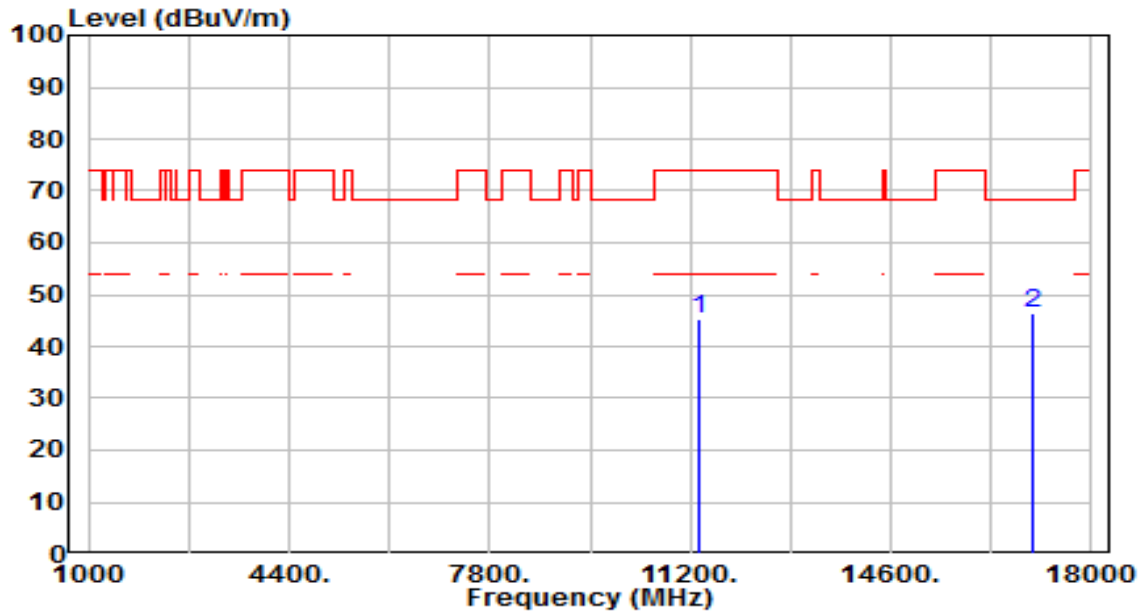


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	40.24	5.14	45.39	-28.61	74.00	200	254	Peak
2	*	17010.000	40.72	5.74	46.46	-21.74	68.20	200	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

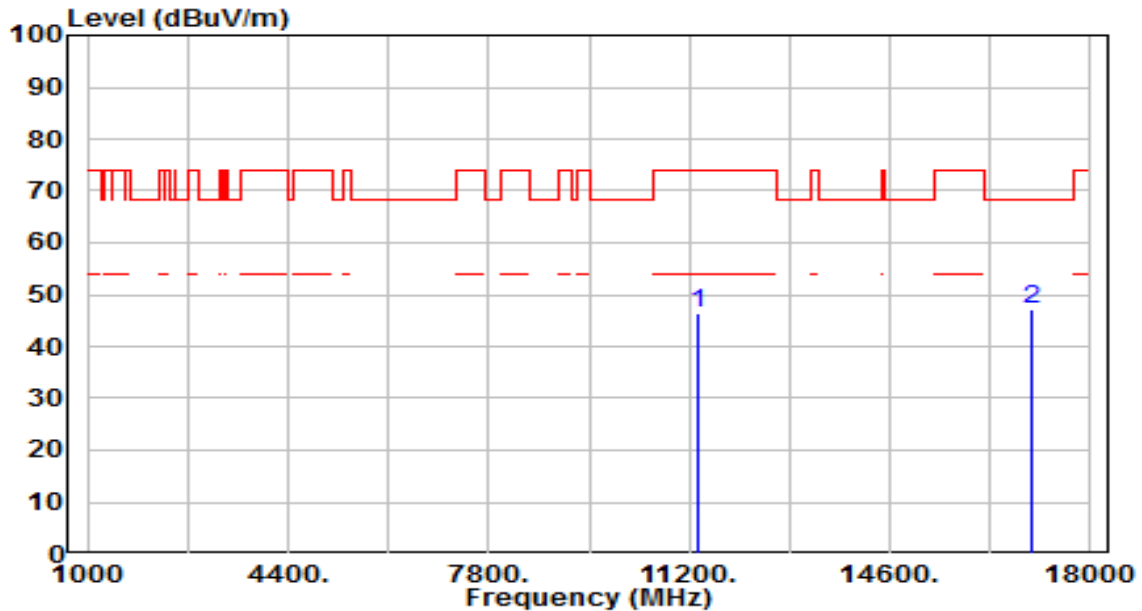


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.25	5.14	46.40	-27.60	74.00	200	104	Peak
2	* 17010.000	41.31	5.74	47.05	-21.15	68.20	200	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

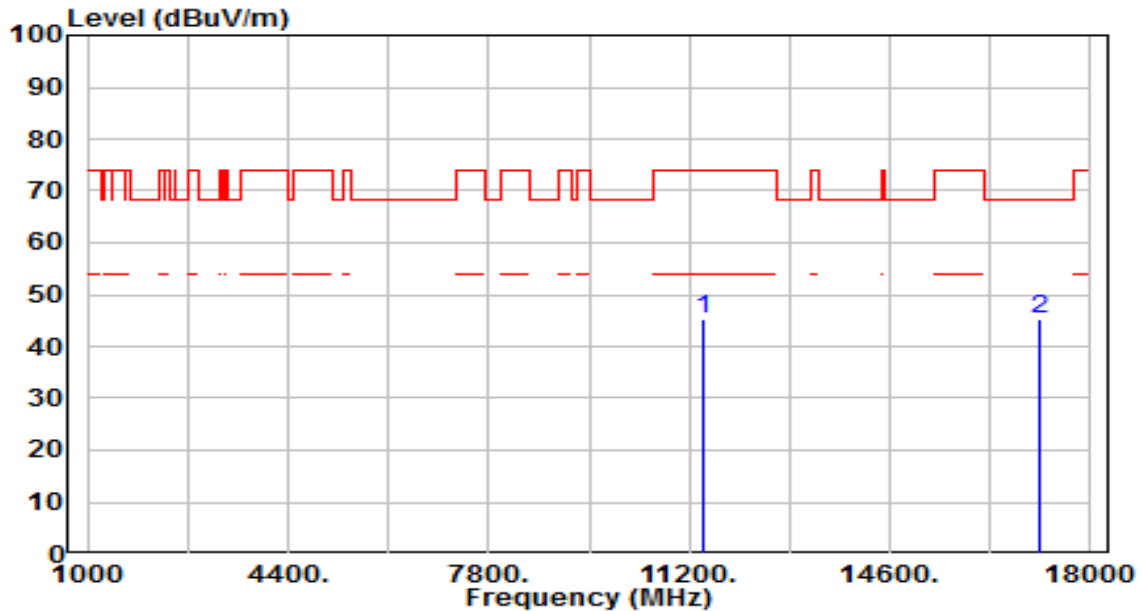


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	39.87	5.23	45.10	-28.90	74.00	200	344	Peak
2	*	17130.000	39.98	5.48	45.45	-22.75	68.20	200	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

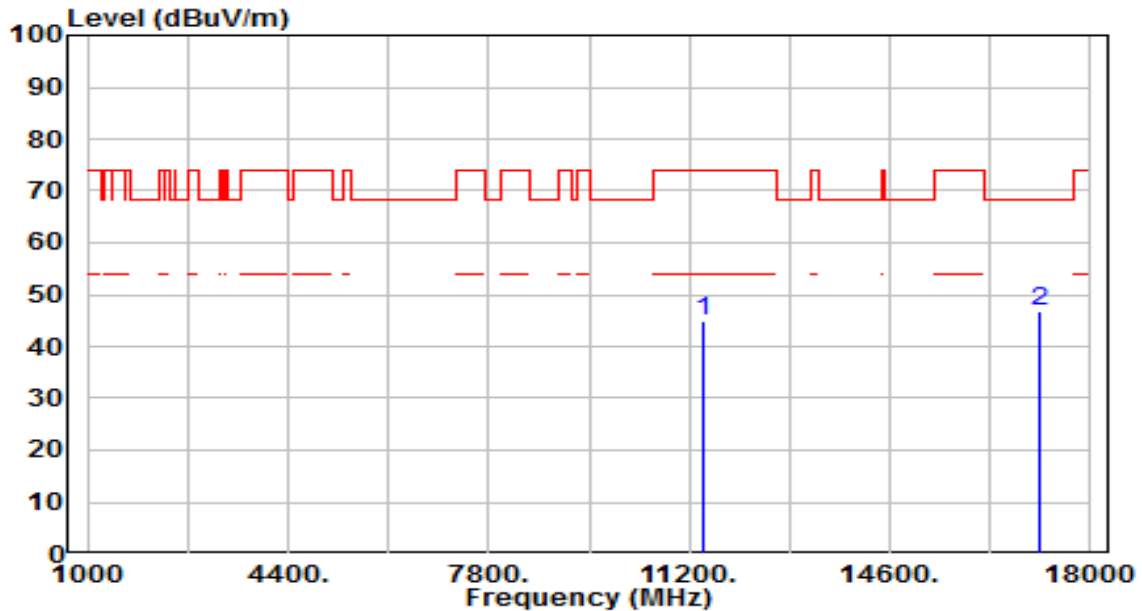


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	39.74	5.23	44.97	-29.03	74.00	200	57	Peak
2	*	17130.000	41.32	5.48	46.80	-21.40	68.20	200	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

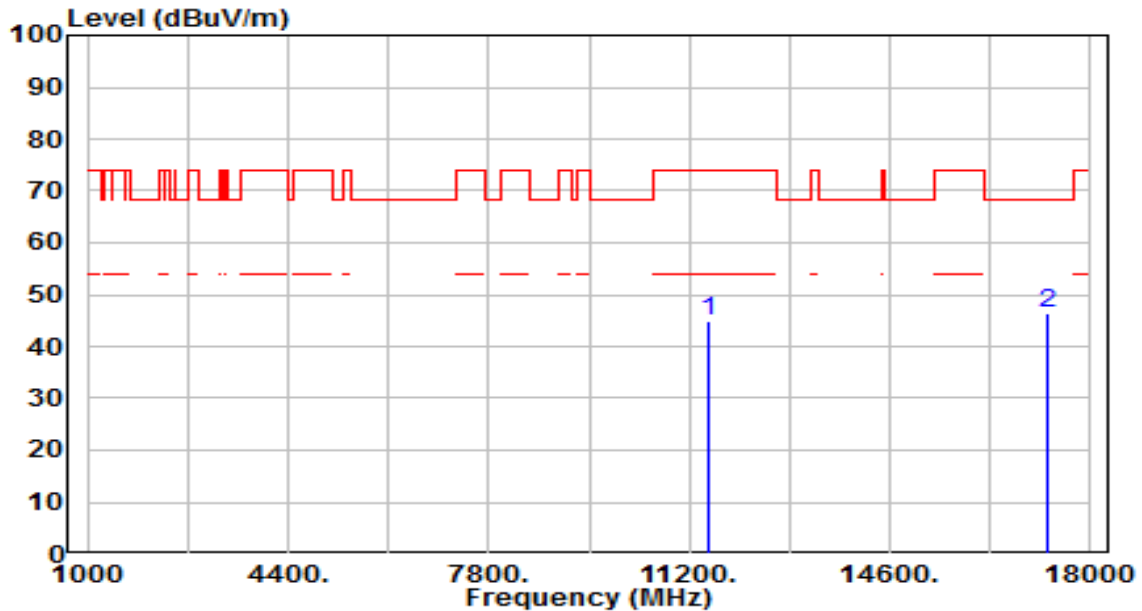


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	39.55	5.29	44.85	-29.15	74.00	200	312	Peak
2	*	17265.000	41.09	5.18	46.27	-21.93	68.20	200	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

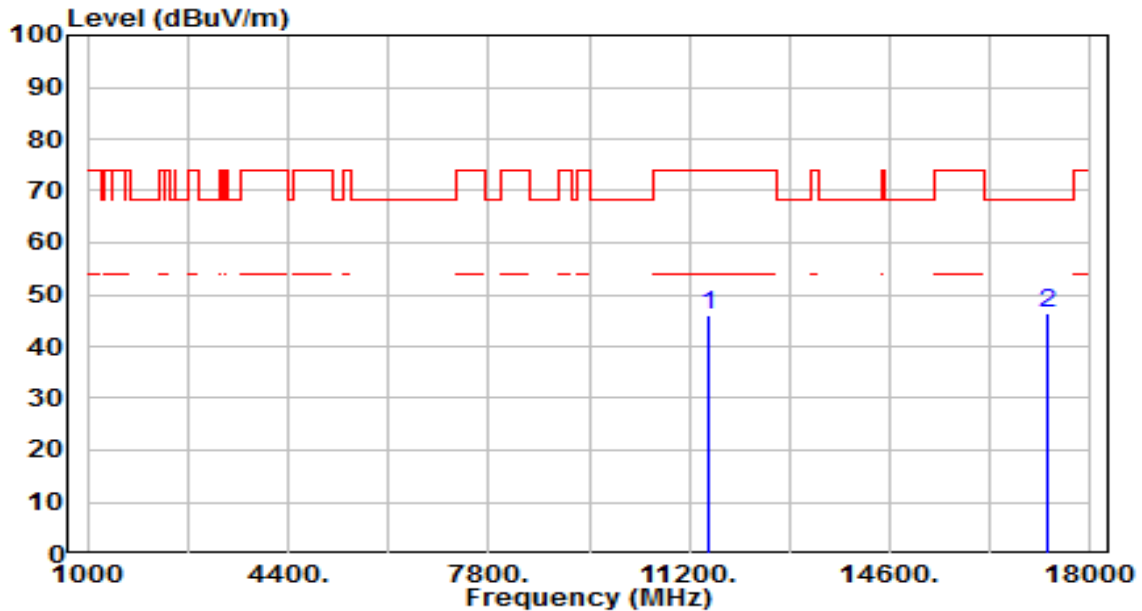


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	40.66	5.29	45.96	-28.04	74.00	200	8	Peak
2	*	17265.000	41.25	5.18	46.43	-21.77	68.20	200	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

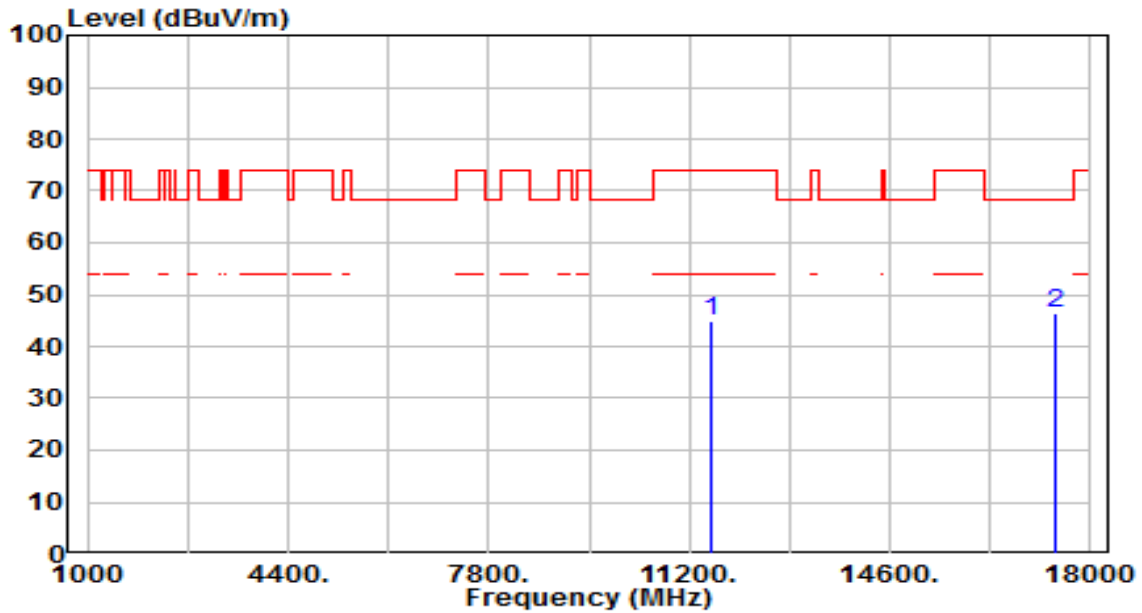


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	39.70	5.37	45.07	-28.93	74.00	200	303	Peak
2	*	17385.000	41.39	4.92	46.31	-21.89	68.20	200	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

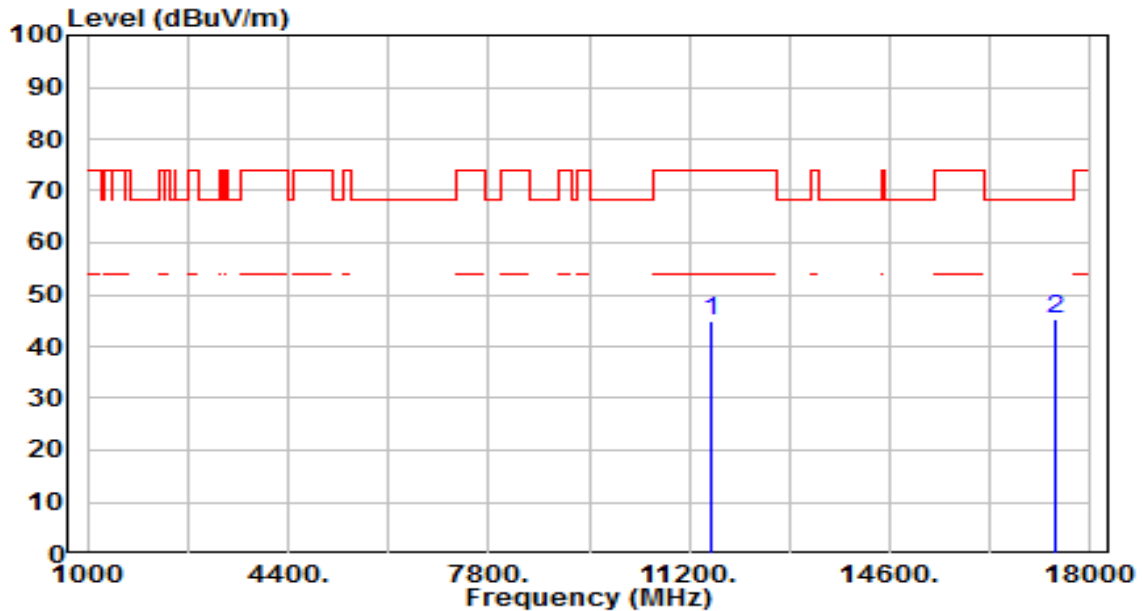


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	39.36	5.37	44.73	-29.27	74.00	200	261	Peak
2	*	17385.000	40.53	4.92	45.45	-22.75	68.20	200	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

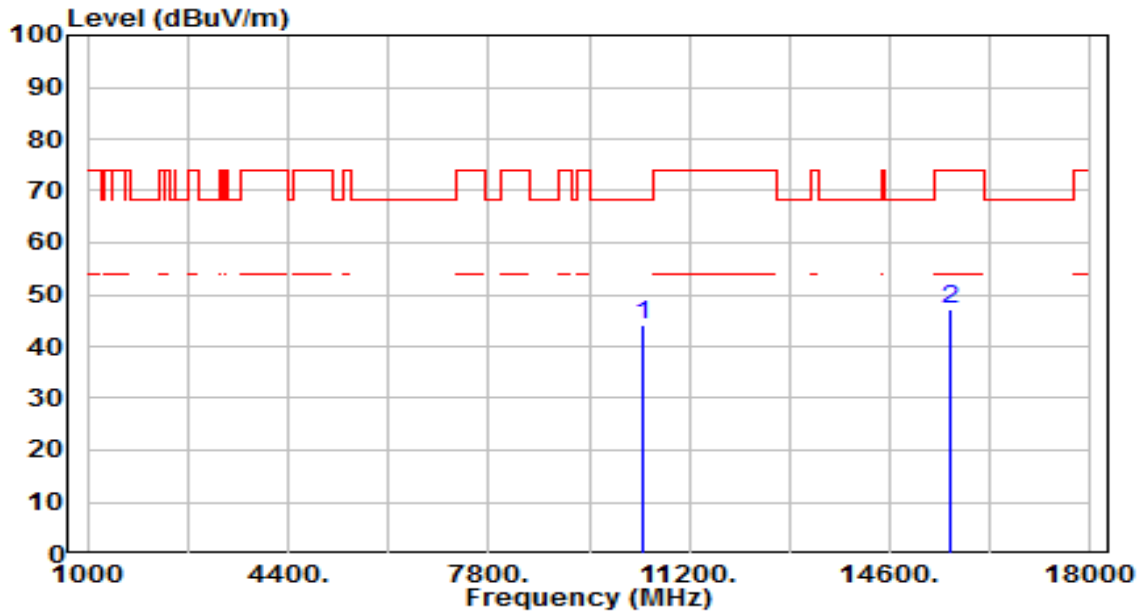


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	39.58	4.74	44.32	-23.88	68.20	200	280	Peak
2		15630.000	40.99	6.25	47.24	-26.76	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

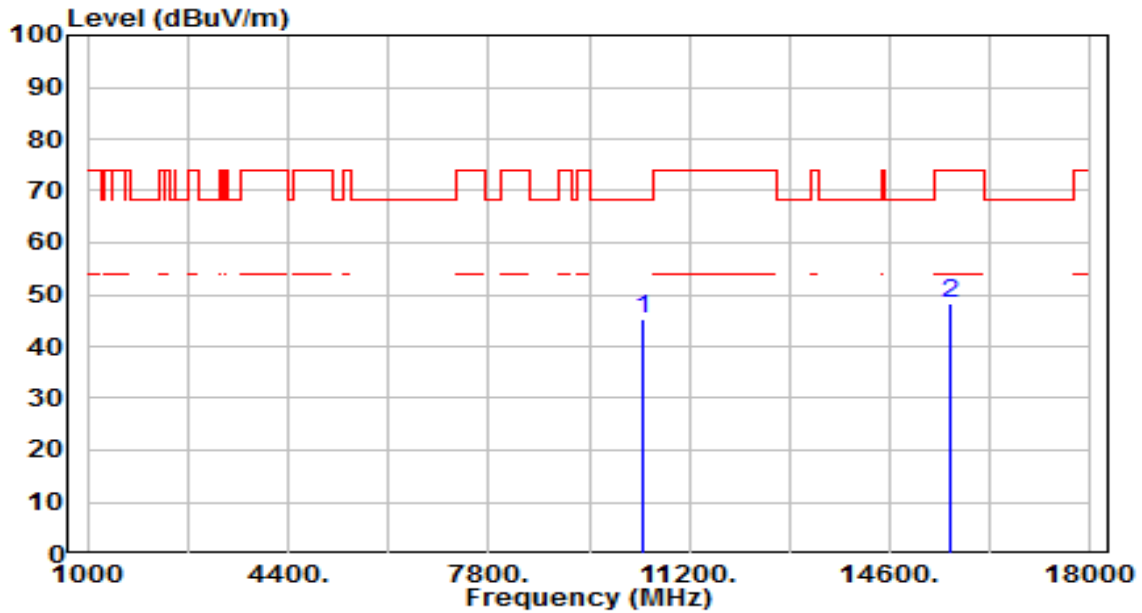


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.57	4.74	45.32	-22.88	68.20	200	235	Peak
2		15630.000	42.09	6.25	48.35	-25.65	74.00	200	302	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

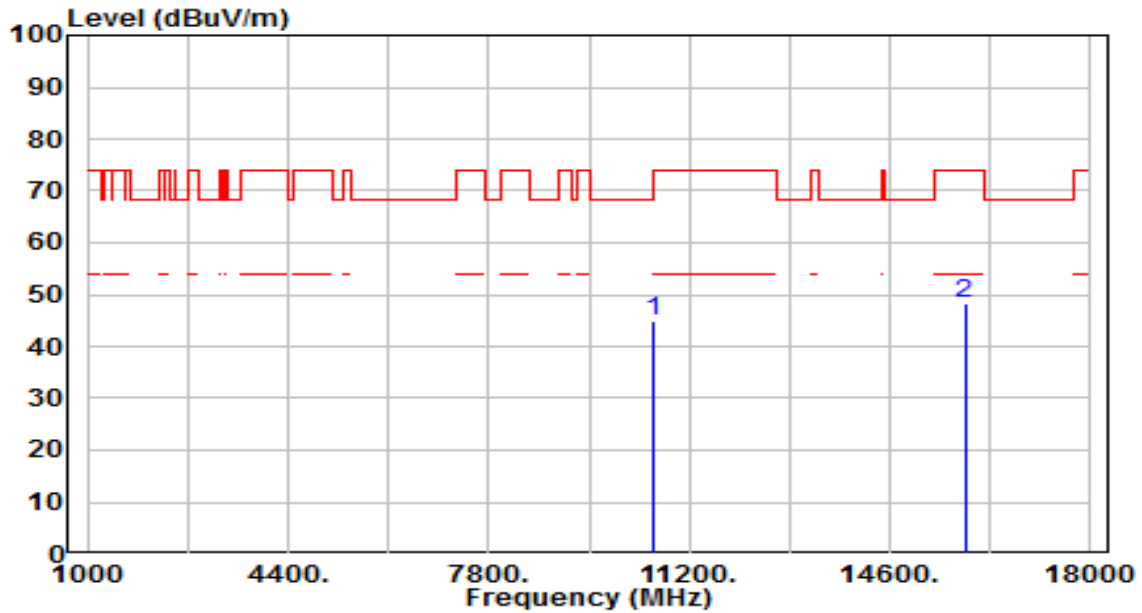


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	40.39	4.56	44.95	-23.25	68.20	200	289	Peak
2		15870.000	41.59	6.63	48.22	-25.78	74.00	200	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

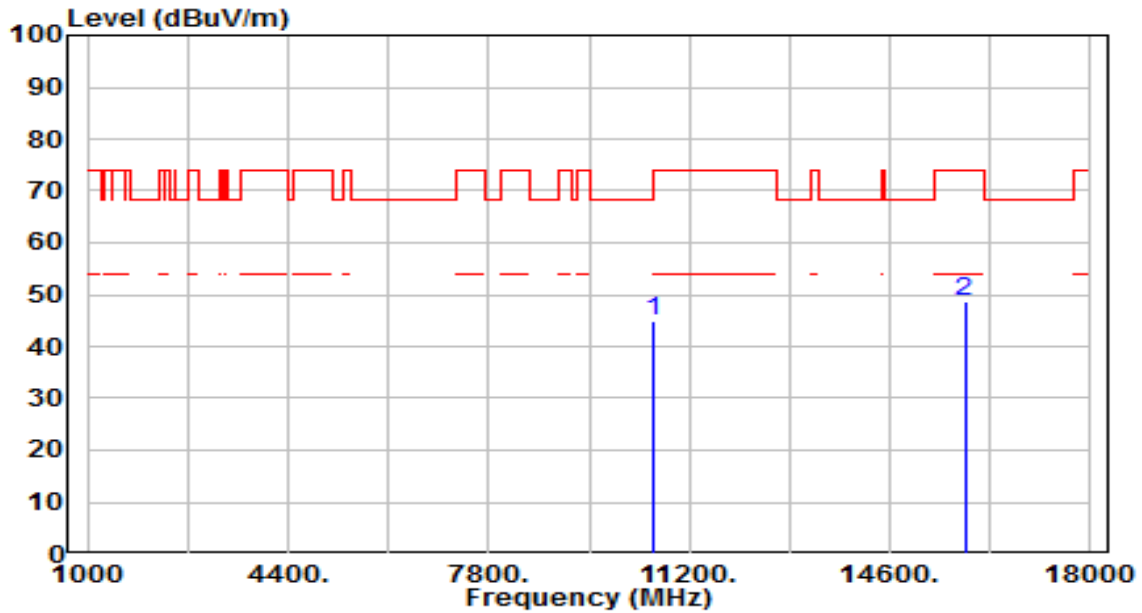


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	40.30	4.56	44.87	-23.33	68.20	200	241	Peak
2		15870.000	42.11	6.63	48.73	-25.27	74.00	200	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

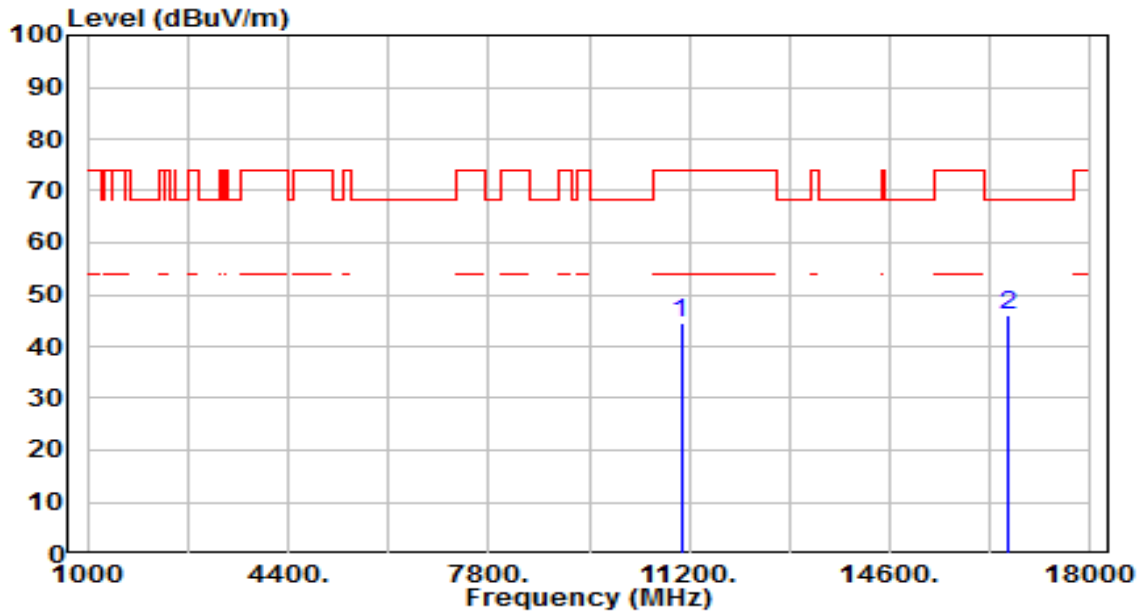


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	40.11	4.60	44.71	-29.29	74.00	200	26	Peak
2	*	16590.000	40.04	6.00	46.03	-22.17	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

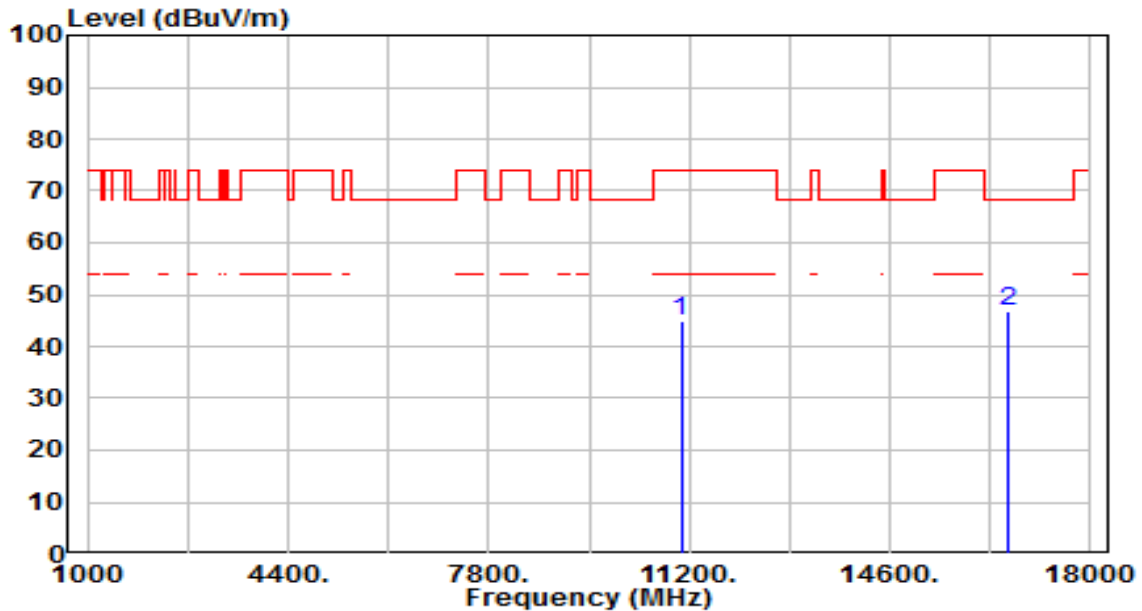


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	40.47	4.60	45.07	-28.93	74.00	200	360	Peak
2	*	16590.000	40.82	6.00	46.82	-21.38	68.20	200	128	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

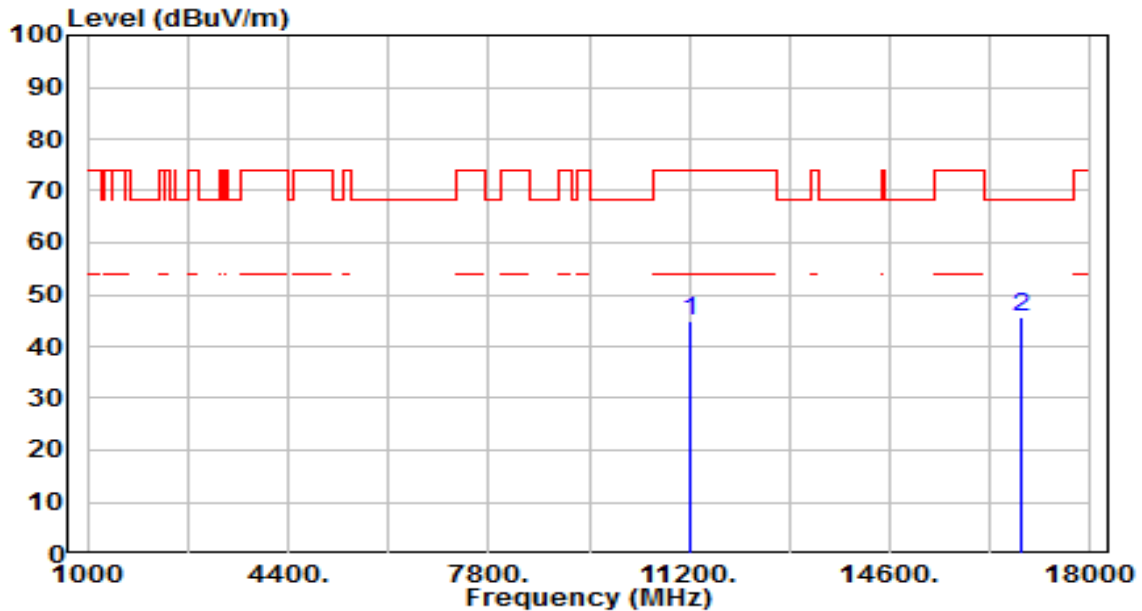


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	39.92	5.00	44.92	-29.08	74.00	200	280	Peak
2	*	16830.000	39.75	5.98	45.73	-22.47	68.20	200	297	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

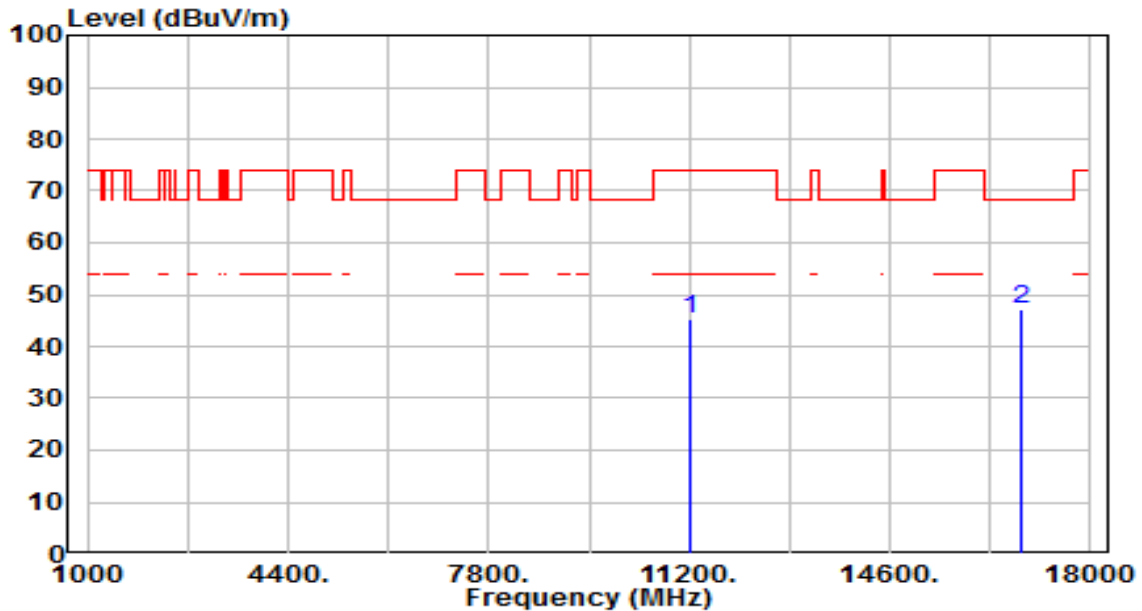


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	40.27	5.00	45.27	-28.73	74.00	200	90	Peak
2	* 16830.000	41.07	5.98	47.05	-21.15	68.20	200	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

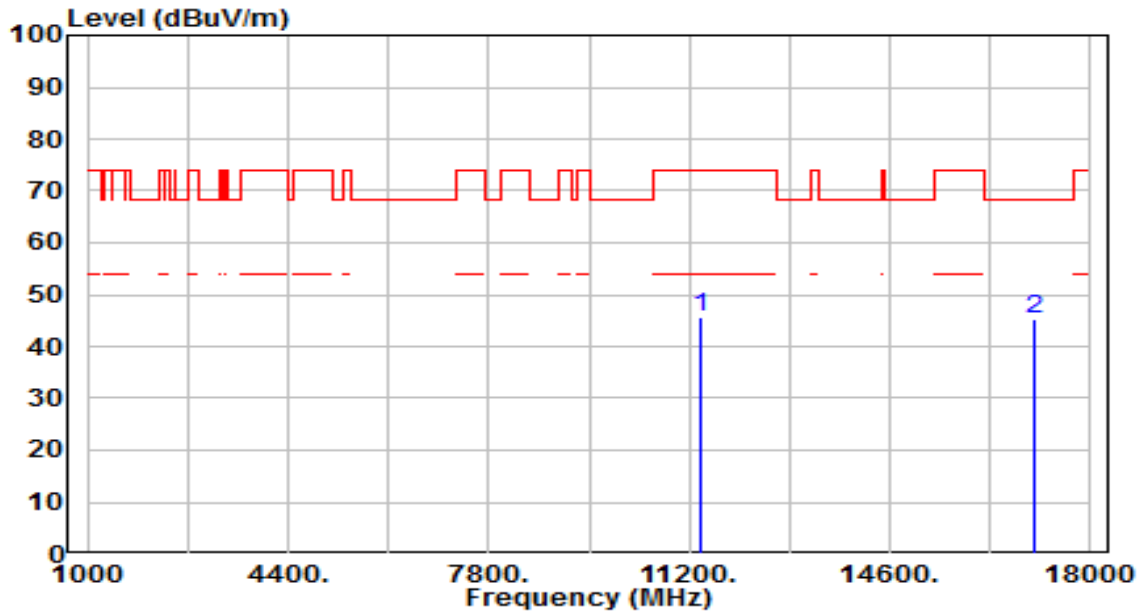


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	40.45	5.19	45.64	-28.36	74.00	200	324	Peak
2	*	17070.000	39.78	5.61	45.39	-22.81	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

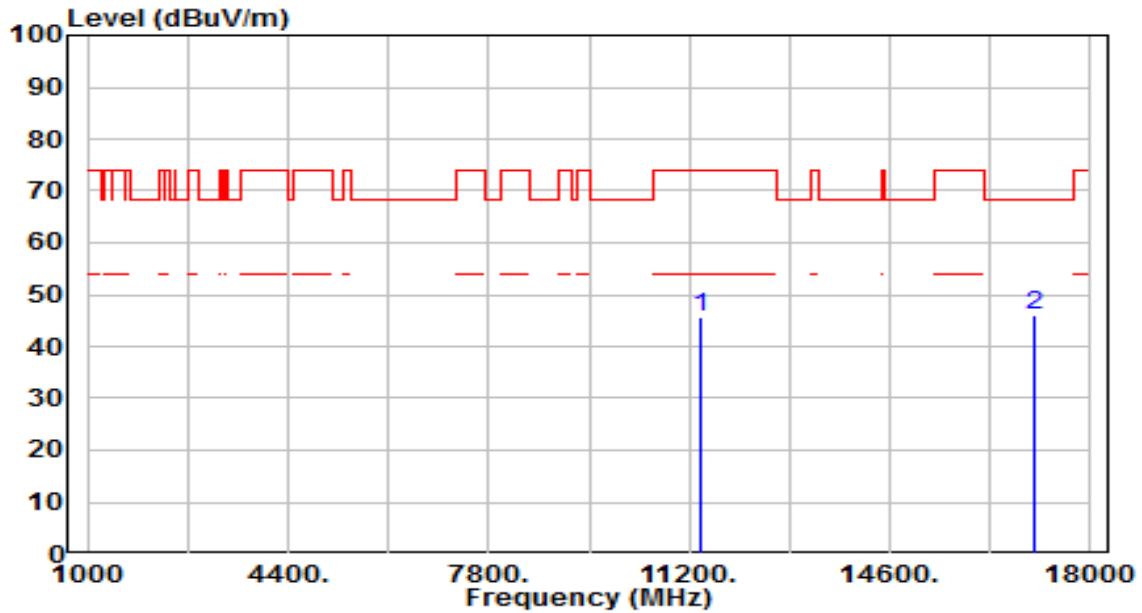


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	40.50	5.19	45.69	-28.31	74.00	200	244	Peak
2	*	17070.000	40.57	5.61	46.18	-22.02	68.20	200	221	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

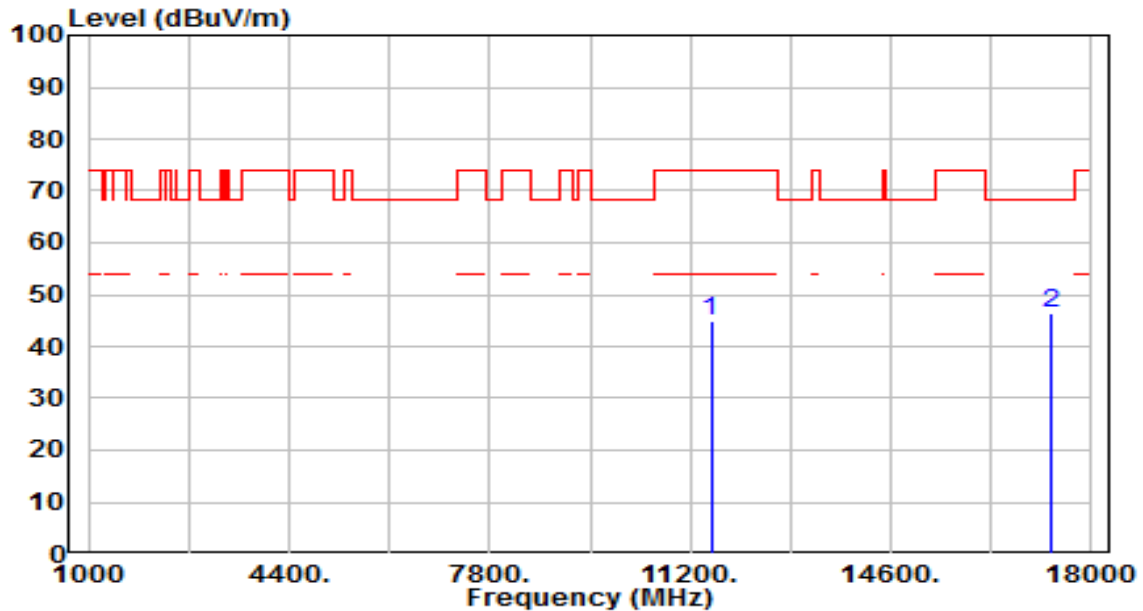


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	39.41	5.33	44.75	-29.25	74.00	200	360	Peak
2	*	17325.000	41.18	5.05	46.24	-21.96	68.20	200	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

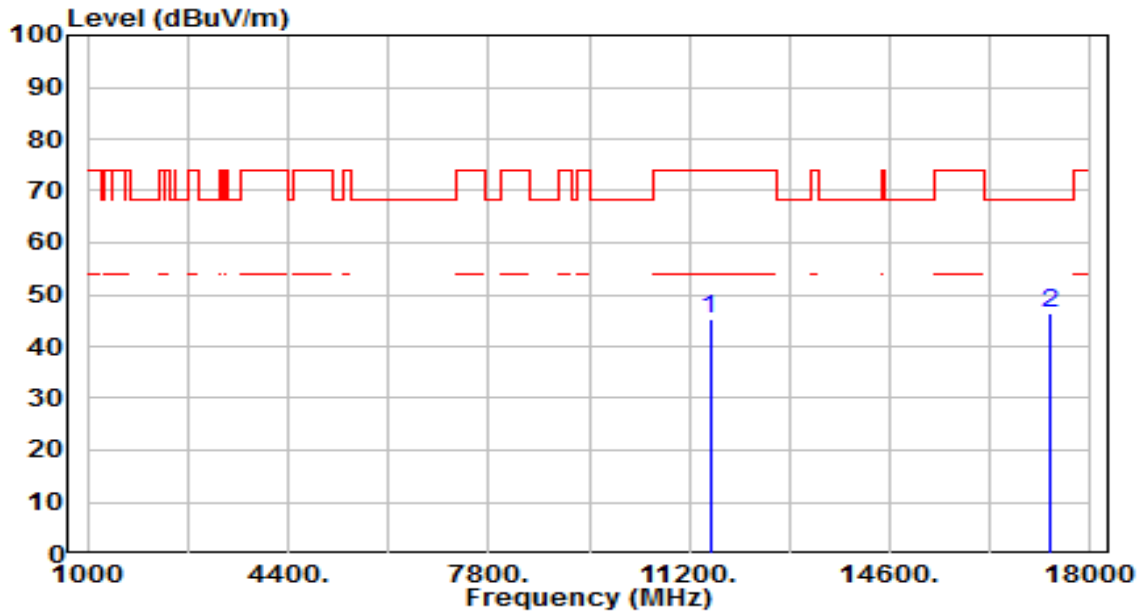


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	39.77	5.33	45.10	-28.90	74.00	200	288	Peak
2	*	17325.000	41.26	5.05	46.31	-21.89	68.20	200	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

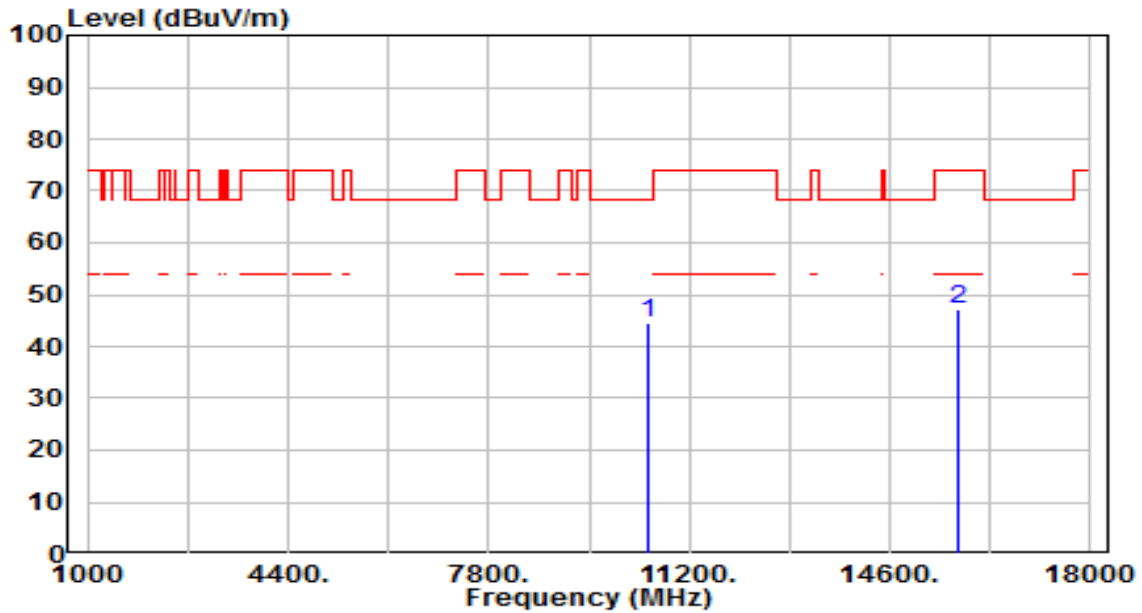


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.90	4.62	44.52	-23.68	68.20	200	81	Peak
2		15750.000	40.52	6.49	47.01	-26.99	74.00	200	306	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

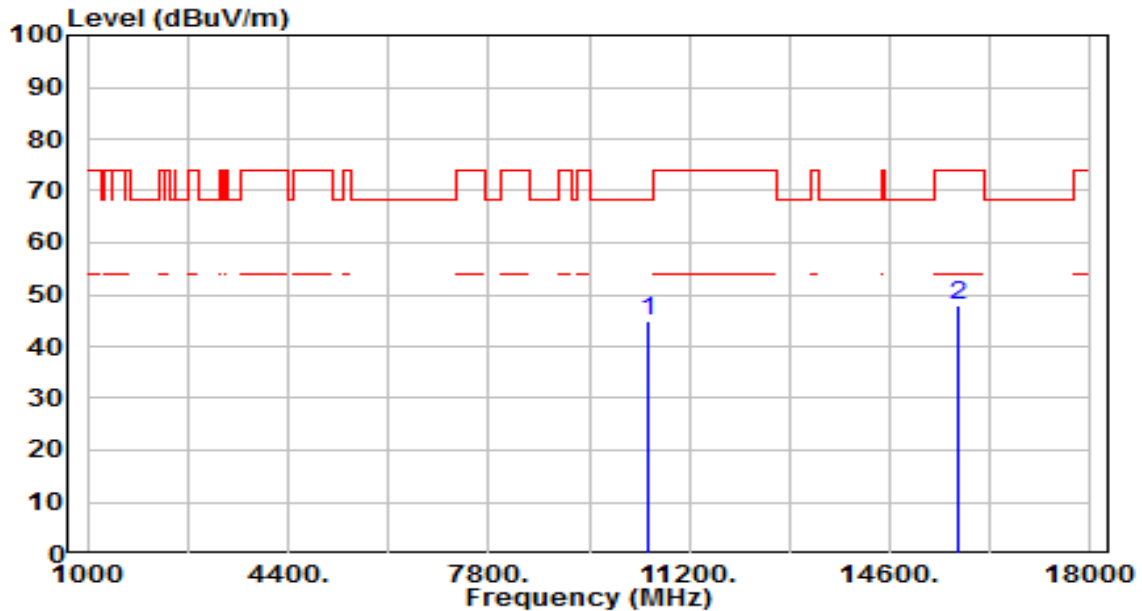


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.31	4.62	44.94	-23.26	68.20	200	360	Peak
2		15750.000	41.45	6.49	47.94	-26.06	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

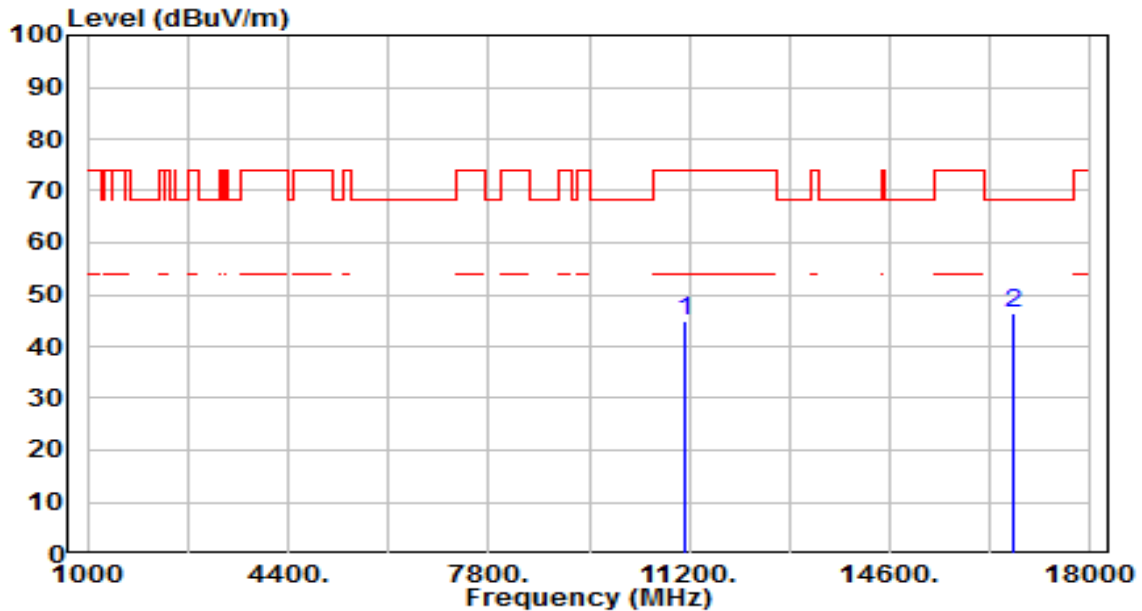


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	40.09	4.82	44.90	-29.10	74.00	200	192	Peak
2	* 16710.000	40.54	6.01	46.54	-21.66	68.20	200	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-20
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

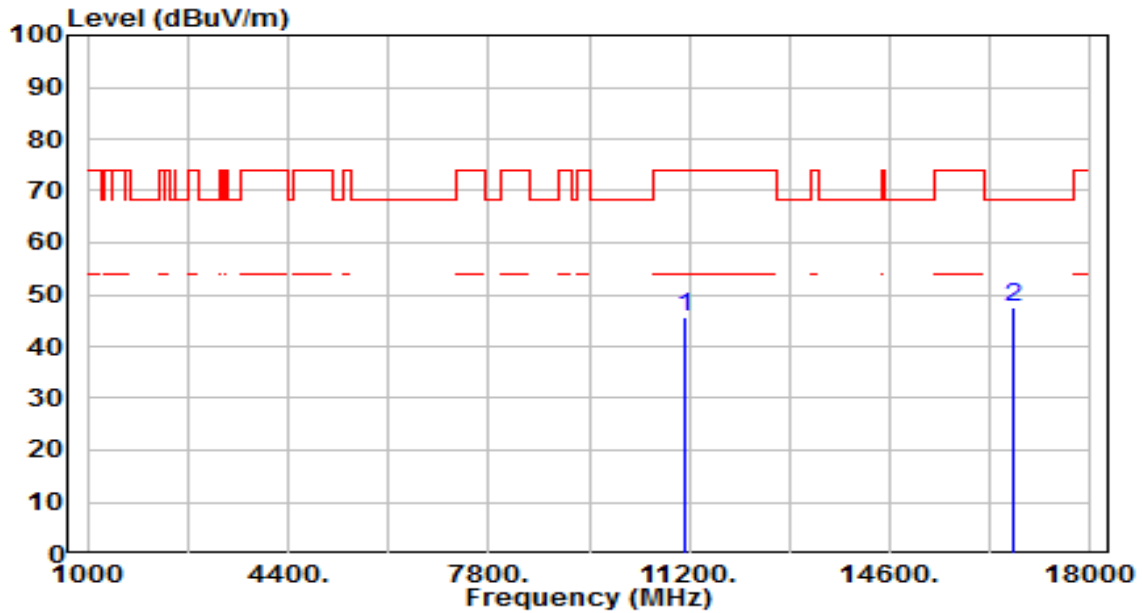


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.01	4.82	45.83	-28.17	74.00	200	290	Peak
2	*	16710.000	41.37	6.01	47.38	-20.82	68.20	200	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

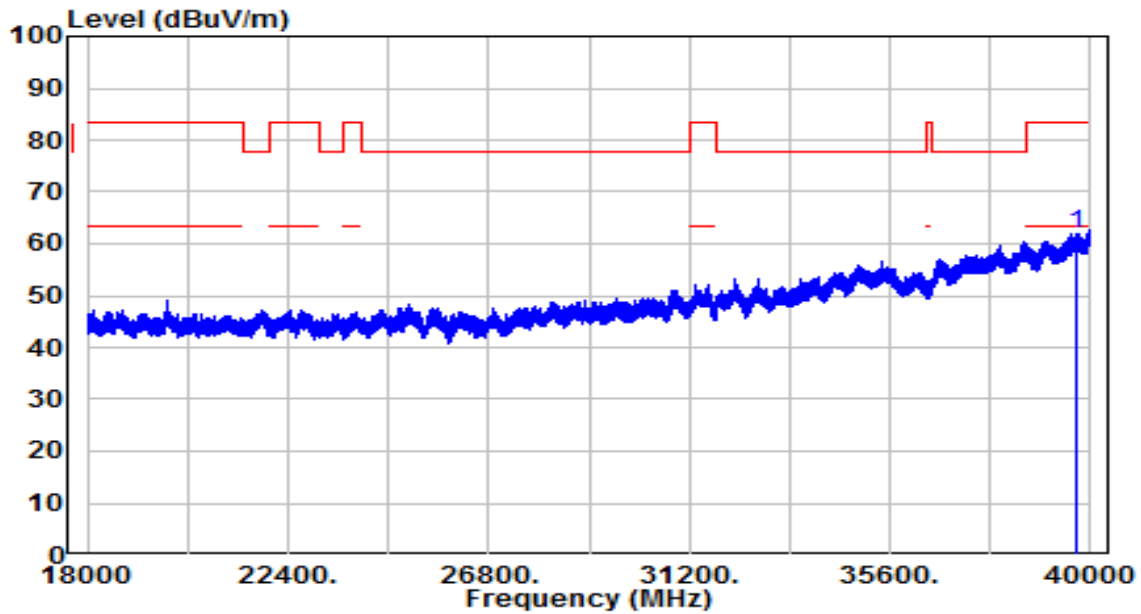


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39691.310	35.94	26.01	61.95	-21.55	83.50	150	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

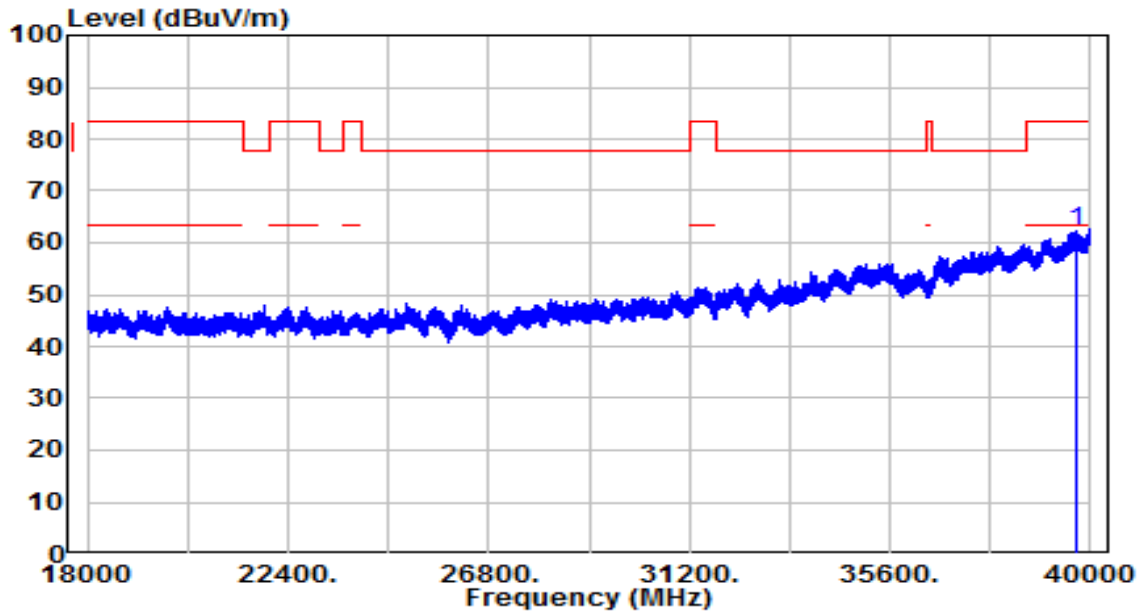


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39666.560	36.38	25.96	62.34	-21.16	83.50	150	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

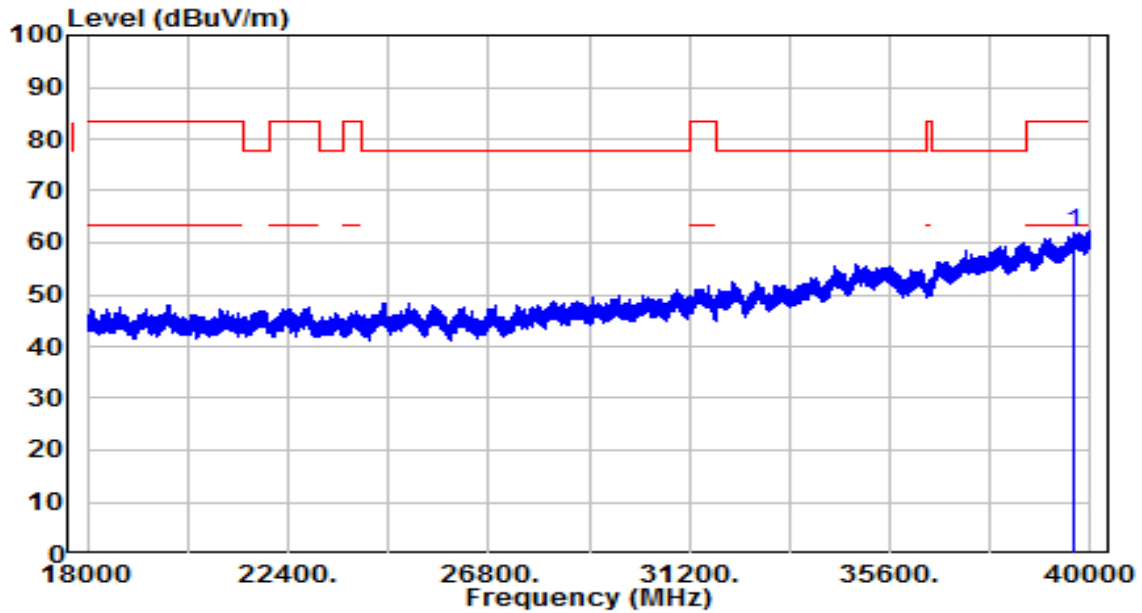


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39652.130	36.00	25.93	61.93	-21.57	83.50	150	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

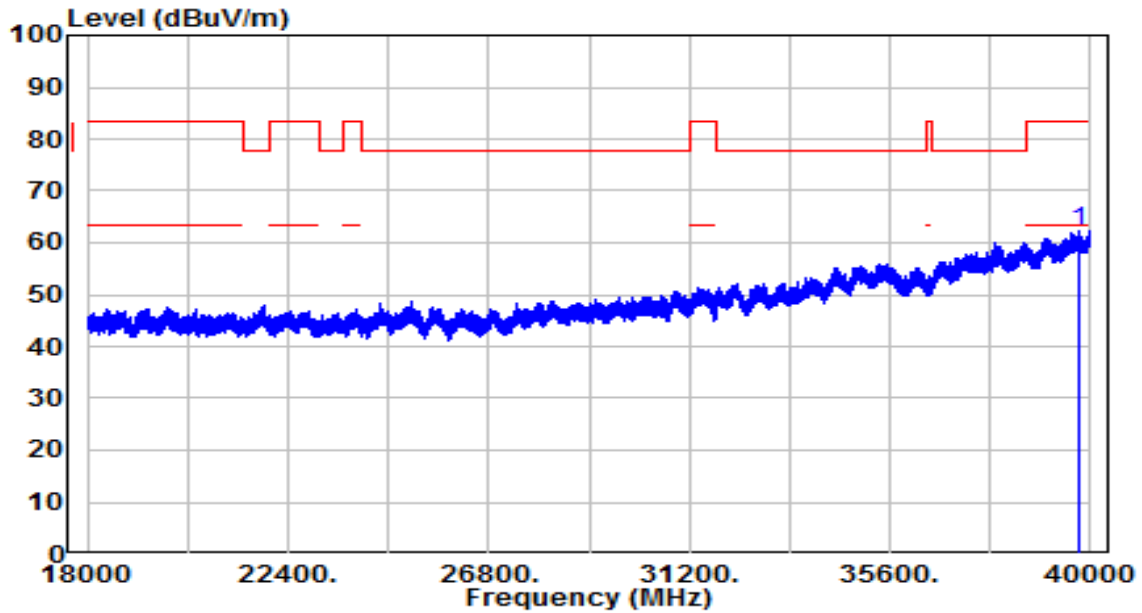

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39726.380	36.21	26.08	62.29	-21.21	83.50	150	128	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.9.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4. Test Setup

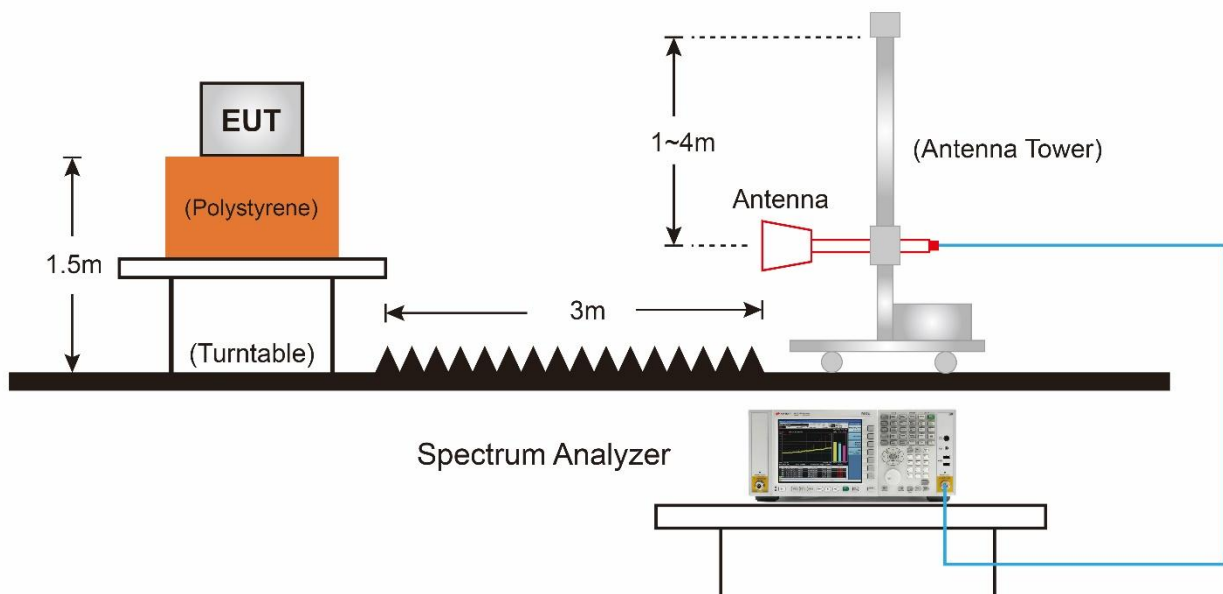

7.9.5.Test Result

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

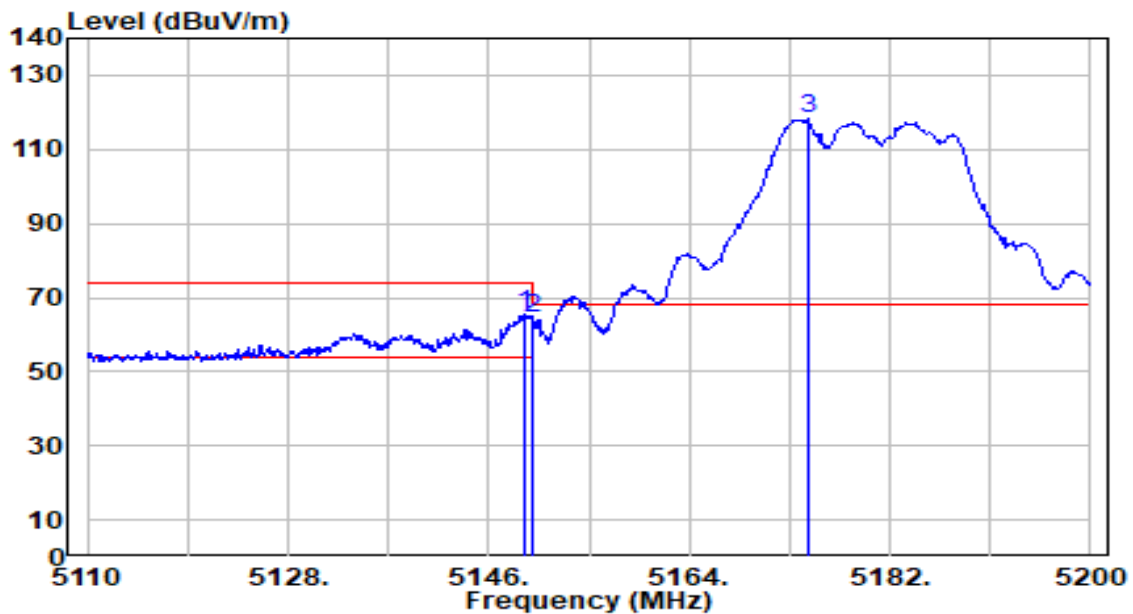


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	64.92	0.65	65.57	-8.43	74.00	199	242	Peak
2		5150.000	63.74	0.65	64.39	-9.61	74.00	199	242	Peak
3		5174.620	117.48	0.68	118.16	N/A	N/A	199	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

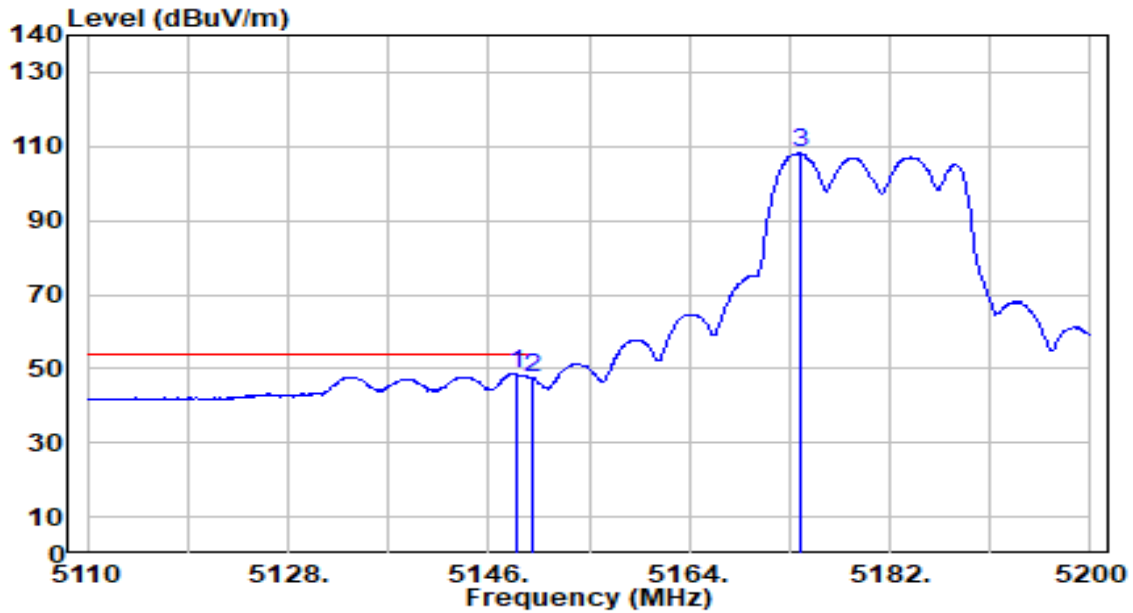


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.430	48.04	0.65	48.69	-5.31	54.00	199	242	Average
2		5150.000	46.78	0.65	47.43	-6.57	54.00	199	242	Average
3		5173.900	107.51	0.68	108.19	N/A	N/A	199	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

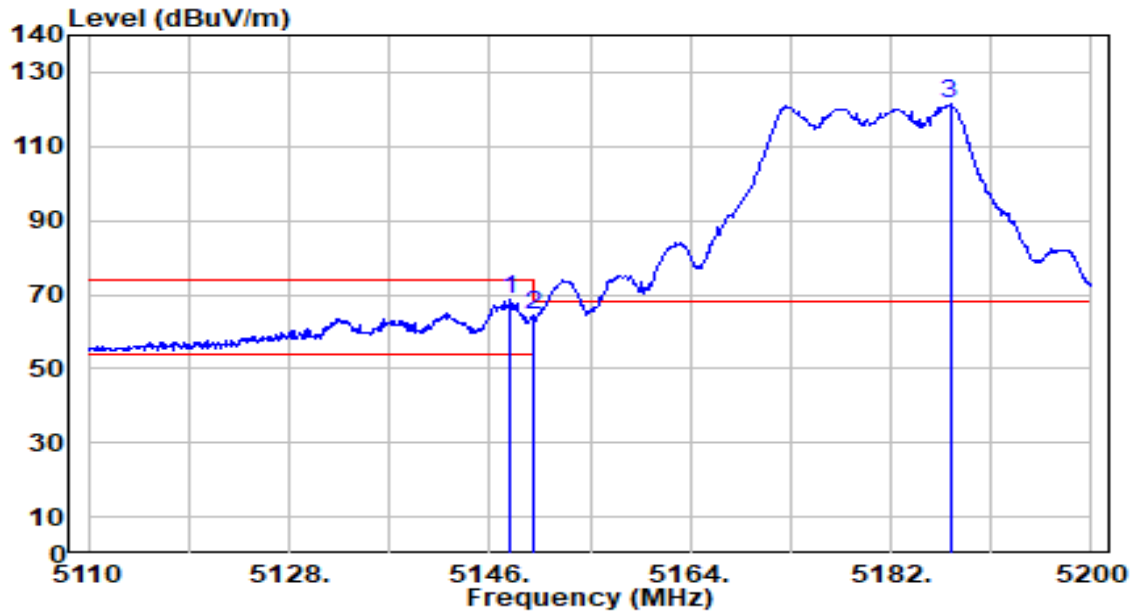


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	68.06	0.65	68.71	-5.29	74.00	170	171	Peak
2		5150.000	63.60	0.65	64.26	-9.74	74.00	170	171	Peak
3		5187.310	120.56	0.69	121.25	N/A	N/A	170	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

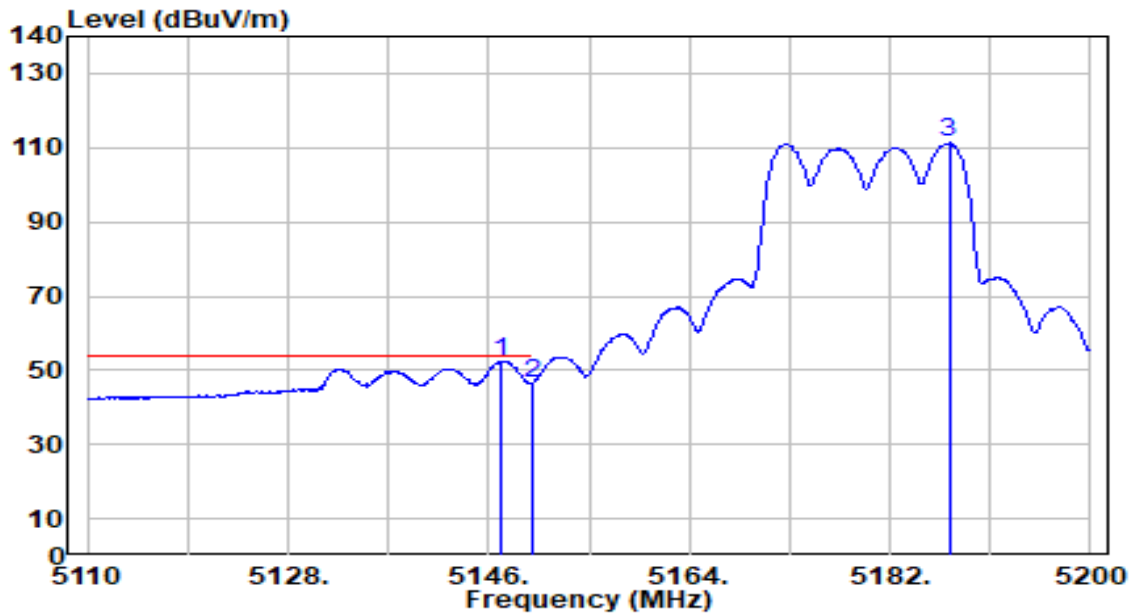


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.170	51.90	0.65	52.55	-1.45	54.00	170	171	Average
2		5150.000	46.09	0.65	46.74	-7.26	54.00	170	171	Average
3		5187.310	110.62	0.69	111.31	N/A	N/A	170	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

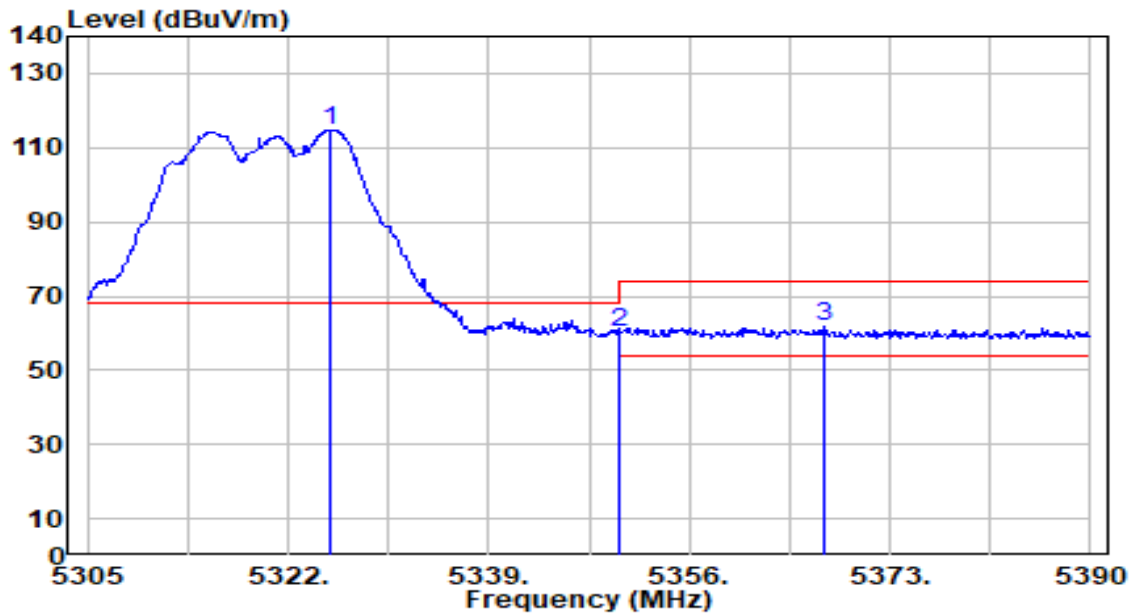


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.570	114.37	0.51	114.88	N/A	N/A	200	126	Peak
2	5350.000	59.82	0.47	60.29	-13.71	74.00	200	126	Peak
3	* 5367.390	61.56	0.44	62.00	-12.00	74.00	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

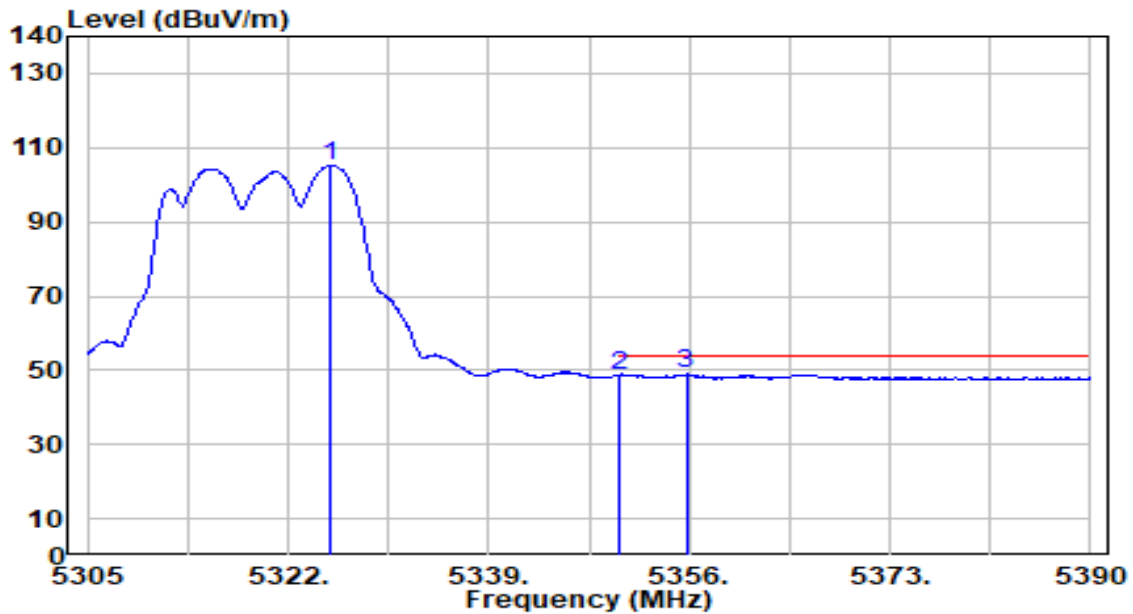


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.655	104.71	0.51	105.22	N/A	N/A	200	126	Average
2	5350.000	48.08	0.47	48.55	-5.45	54.00	200	126	Average
3	* 5355.745	48.42	0.46	48.88	-5.12	54.00	200	126	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

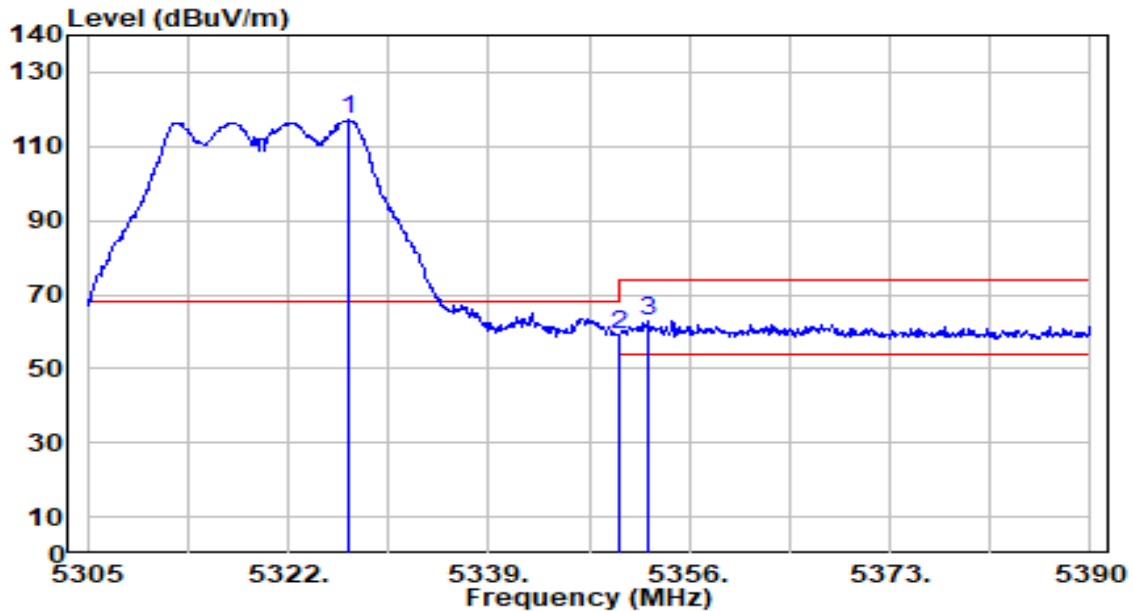


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.185	116.62	0.51	117.12	N/A	N/A	200	182	Peak
2	5350.000	58.81	0.47	59.28	-14.72	74.00	200	182	Peak
3	* 5352.515	62.44	0.47	62.90	-11.10	74.00	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

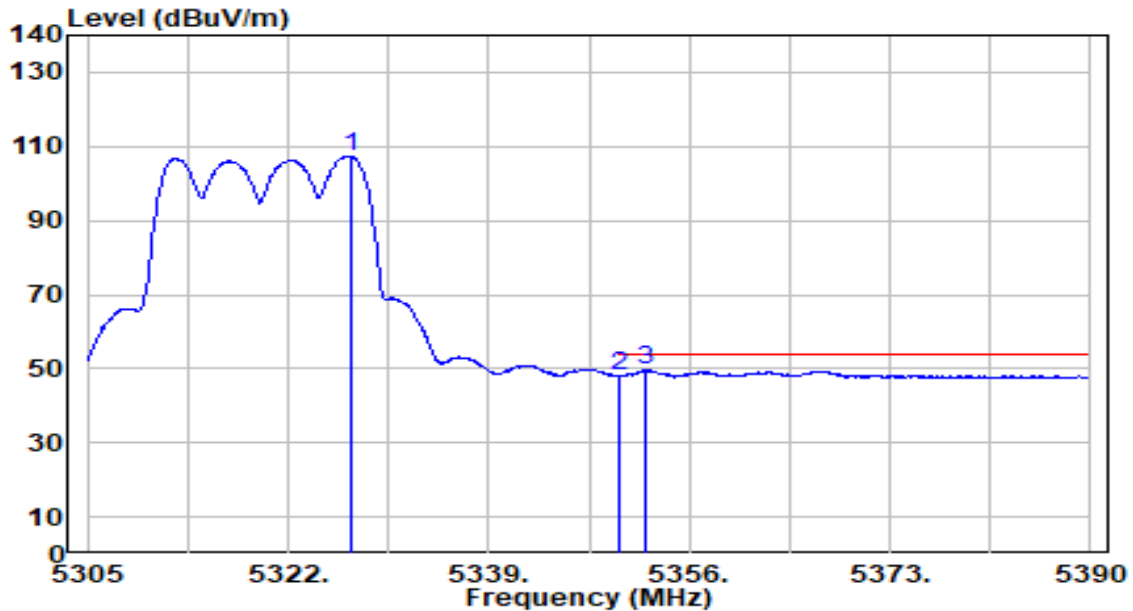


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.270	106.84	0.51	107.35	N/A	N/A	200	182	Average
2	5350.000	47.72	0.47	48.20	-5.80	54.00	200	182	Average
3	* 5352.345	49.08	0.47	49.55	-4.45	54.00	200	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

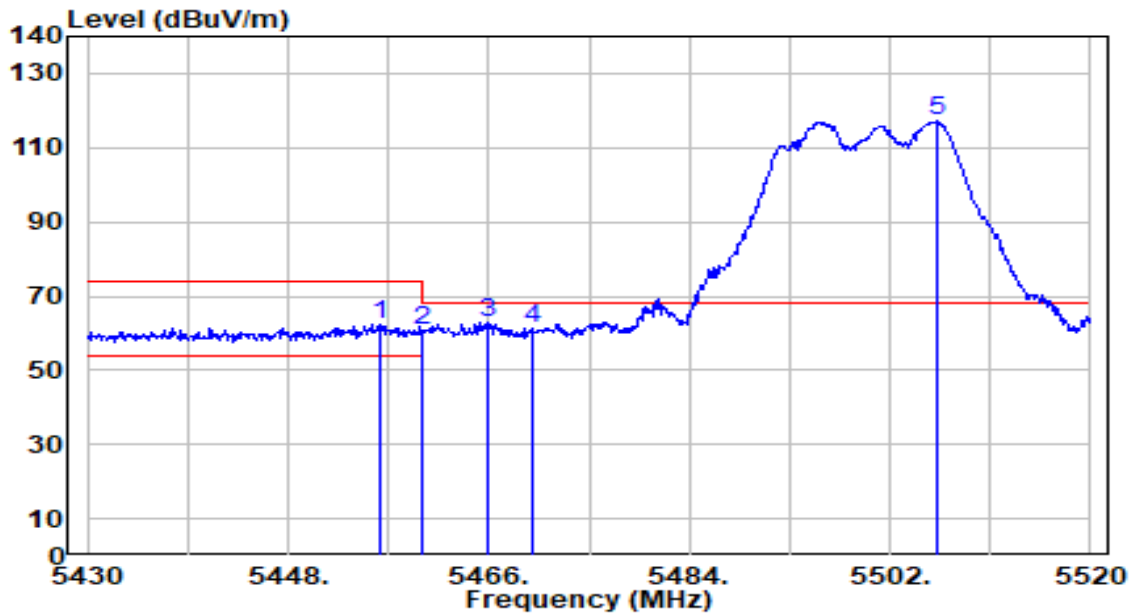


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.190	61.70	0.64	62.34	-11.66	74.00	200	130	Peak
2	5460.000	60.09	0.66	60.75	-13.25	74.00	200	130	Peak
3	* 5465.820	62.08	0.69	62.77	-5.43	68.20	200	130	Peak
4	5470.000	60.73	0.71	61.44	-6.76	68.20	200	130	Peak
5	5506.140	116.30	0.87	117.17	N/A	N/A	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

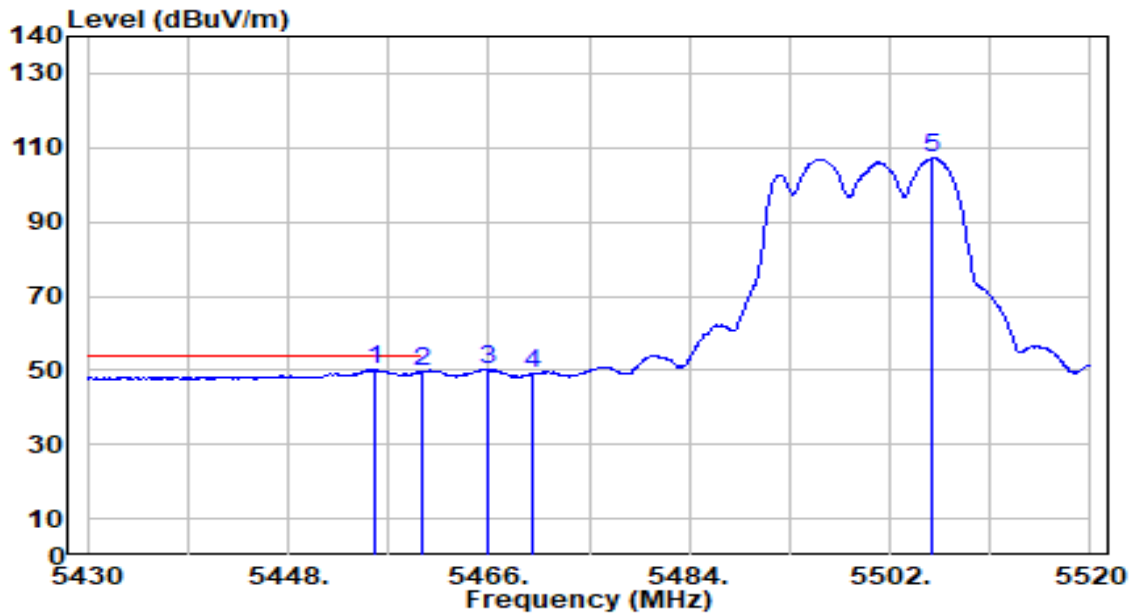


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.830	49.50	0.64	50.14	-3.86	54.00	200	130	Average
2		5460.000	48.83	0.66	49.49	-4.51	54.00	200	130	Average
3		5465.820	49.62	0.69	50.31	N/A	N/A	200	130	Average
4		5470.000	48.43	0.71	49.13	N/A	N/A	200	130	Average
5		5505.690	106.24	0.87	107.11	N/A	N/A	200	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

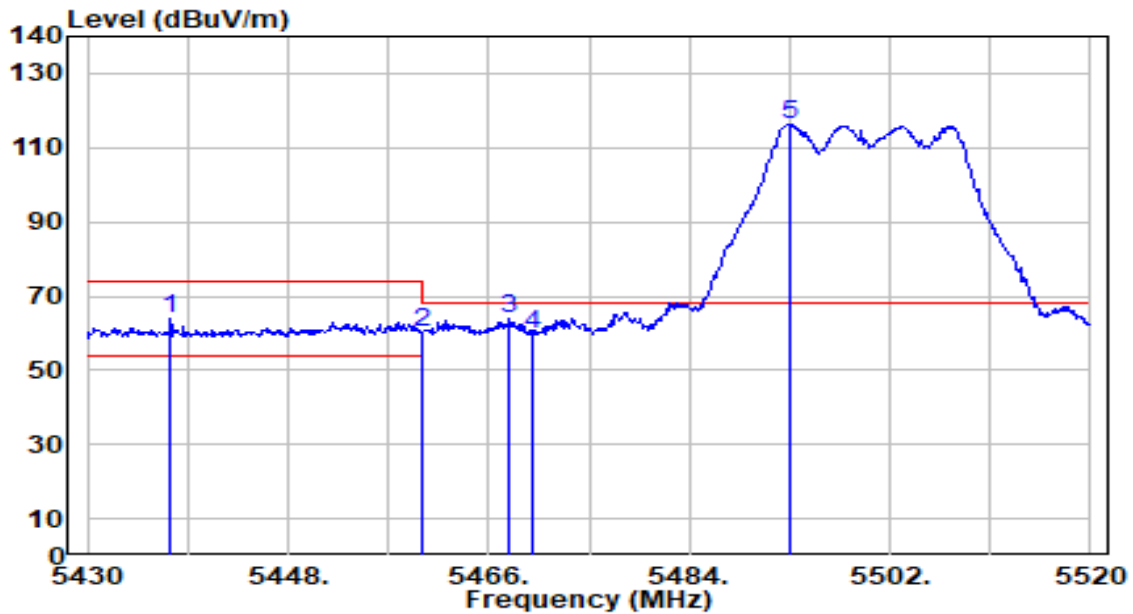


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5437.470	63.61	0.56	64.17	-9.83	74.00	200	164	Peak
2	5460.000	59.52	0.66	60.18	-13.82	74.00	200	164	Peak
3	* 5467.890	62.98	0.70	63.67	-4.53	68.20	200	164	Peak
4	5470.000	59.09	0.71	59.79	-8.41	68.20	200	164	Peak
5	5493.000	115.45	0.81	116.26	N/A	N/A	200	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

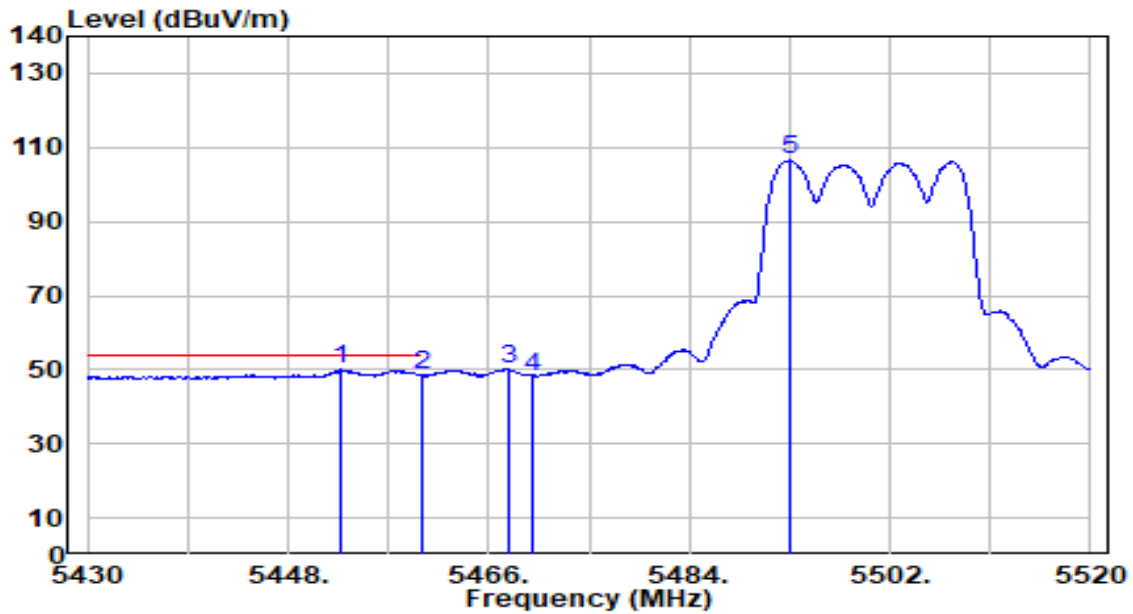


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.770	49.31	0.63	49.94	-4.06	54.00	200	164	Average
2		5460.000	47.85	0.66	48.51	-5.49	54.00	200	164	Average
3		5467.890	49.30	0.70	50.00	N/A	N/A	200	164	Average
4		5470.000	47.52	0.71	48.22	N/A	N/A	200	164	Average
5		5493.000	105.68	0.81	106.49	N/A	N/A	200	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

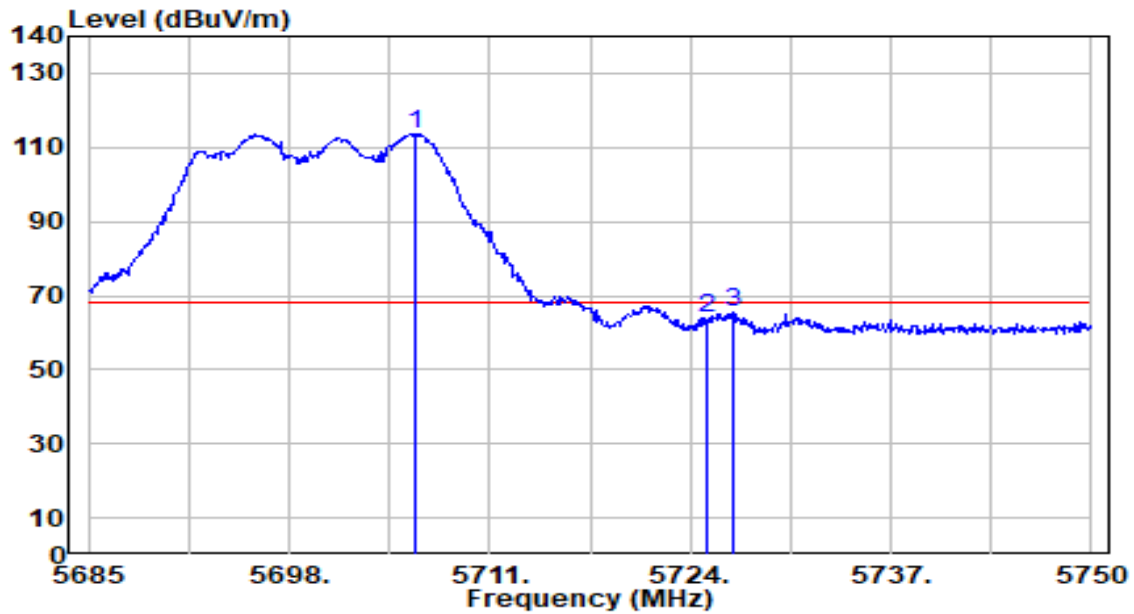


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.125	111.94	1.80	113.75	N/A	N/A	200	118	Peak
2	5725.000	62.05	1.89	63.94	-4.26	68.20	200	118	Peak
3	* 5726.730	63.77	1.90	65.67	-2.53	68.20	200	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

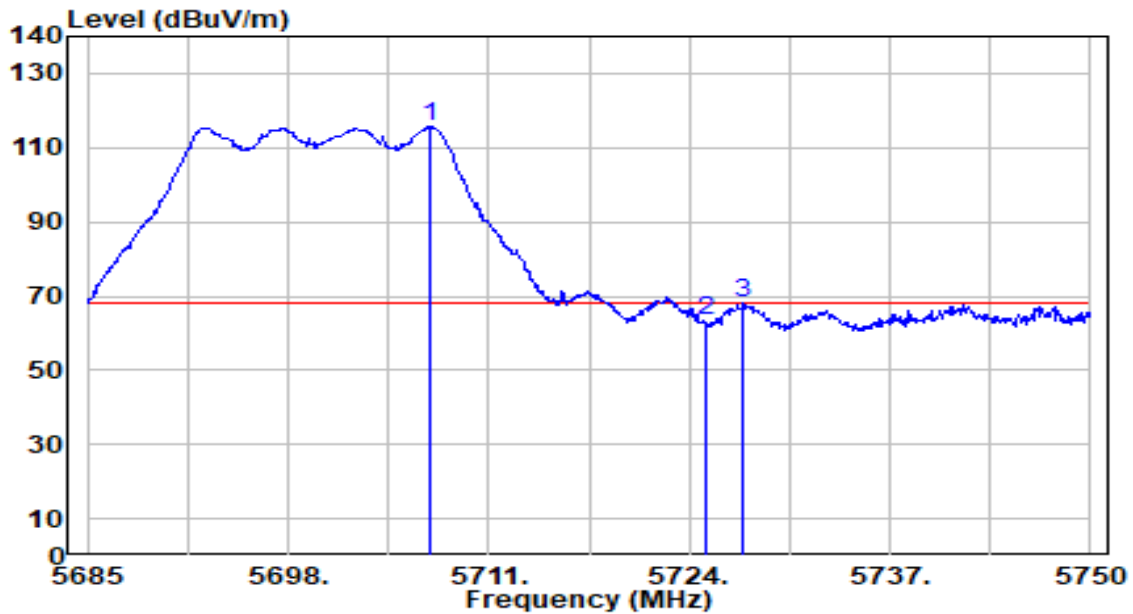


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5707.165	113.88	1.81	115.69	N/A	N/A	200	182	Peak
2	5725.000	61.67	1.89	63.56	-4.64	68.20	200	182	Peak
3	* 5727.510	66.14	1.90	68.04	-0.16	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

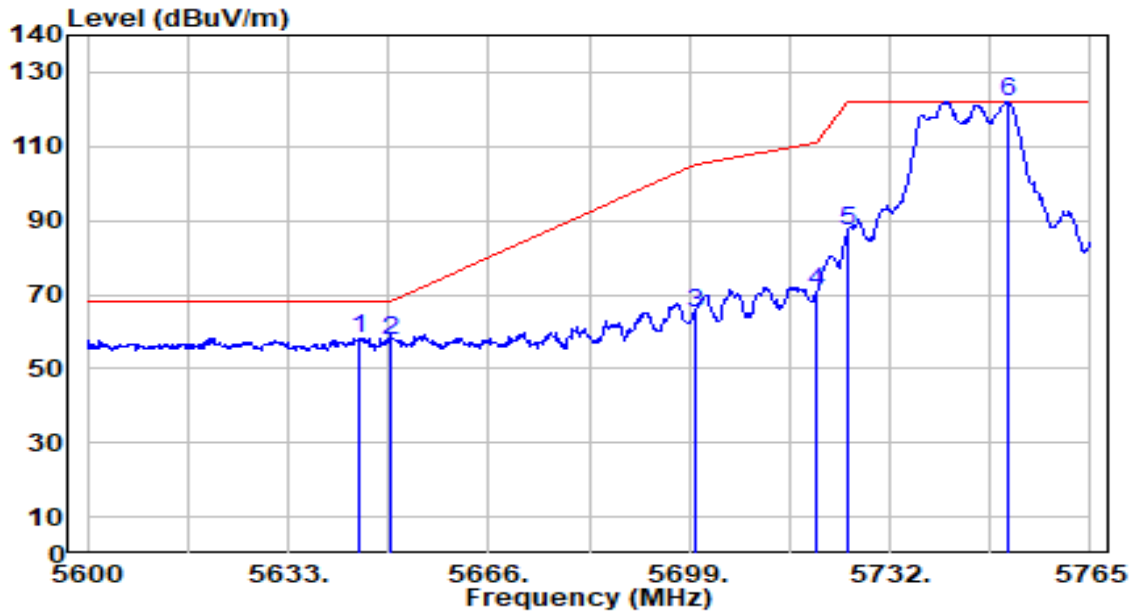


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.715	56.82	1.52	58.34	-9.86	68.20	200	119	Peak
2		5650.000	56.03	1.54	57.57	-10.63	68.20	200	119	Peak
3		5700.000	63.46	1.78	65.23	-39.97	105.20	200	119	Peak
4		5720.000	68.78	1.87	70.65	-40.15	110.80	200	119	Peak
5		5725.000	85.28	1.89	87.18	-35.02	122.20	200	119	Peak
6		5751.305	120.21	2.02	122.22	N/A	N/A	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

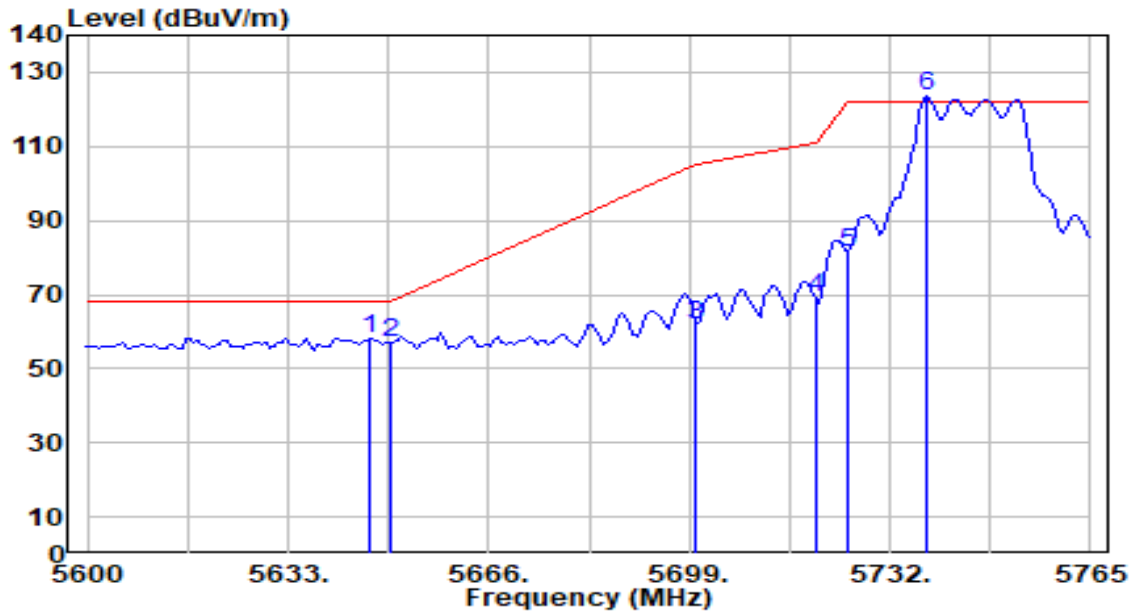


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.445	56.81	1.53	58.34	-9.86	68.20	200	183	Peak
2		5650.000	55.45	1.54	57.00	-11.20	68.20	200	183	Peak
3		5700.000	60.15	1.78	61.92	-43.28	105.20	200	183	Peak
4		5720.000	67.35	1.87	69.22	-41.58	110.80	200	183	Peak
5		5725.000	79.31	1.89	81.21	-40.99	122.20	200	183	Peak
6		5738.145	121.50	1.95	123.45	N/A	N/A	200	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

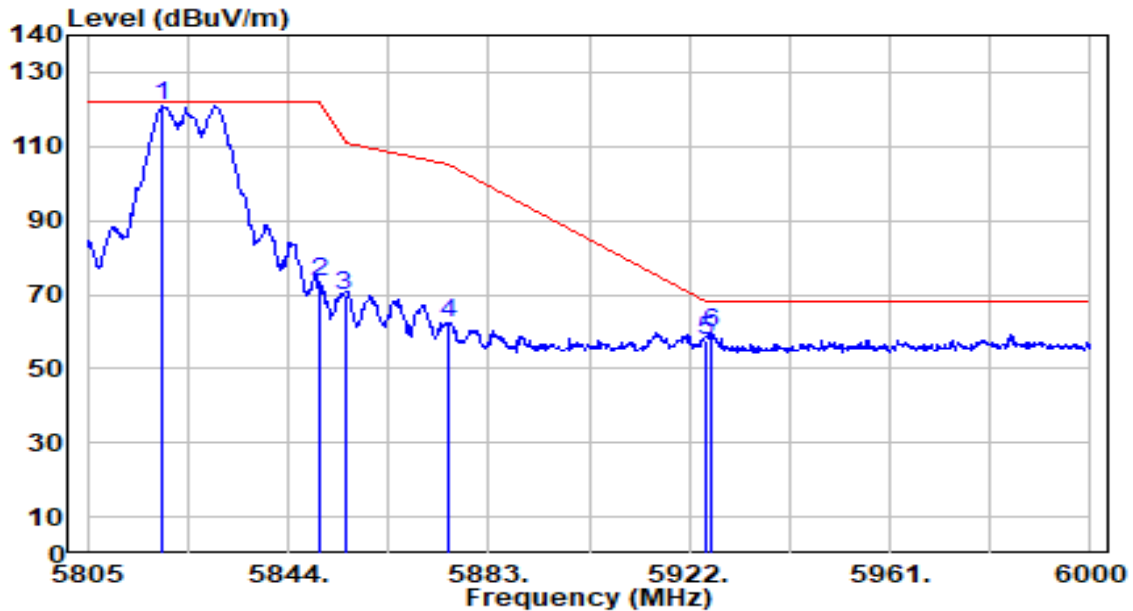


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.625	118.87	2.25	121.12	N/A	N/A	200	181	Peak
2	5850.000	71.39	2.25	73.64	-48.56	122.20	200	181	Peak
3	5855.000	67.33	2.25	69.58	-41.22	110.80	200	181	Peak
4	5875.000	60.20	2.26	62.46	-42.74	105.20	200	181	Peak
5	5925.000	55.55	2.27	57.81	-10.39	68.20	200	181	Peak
6	* 5926.290	57.23	2.27	59.50	-8.70	68.20	200	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

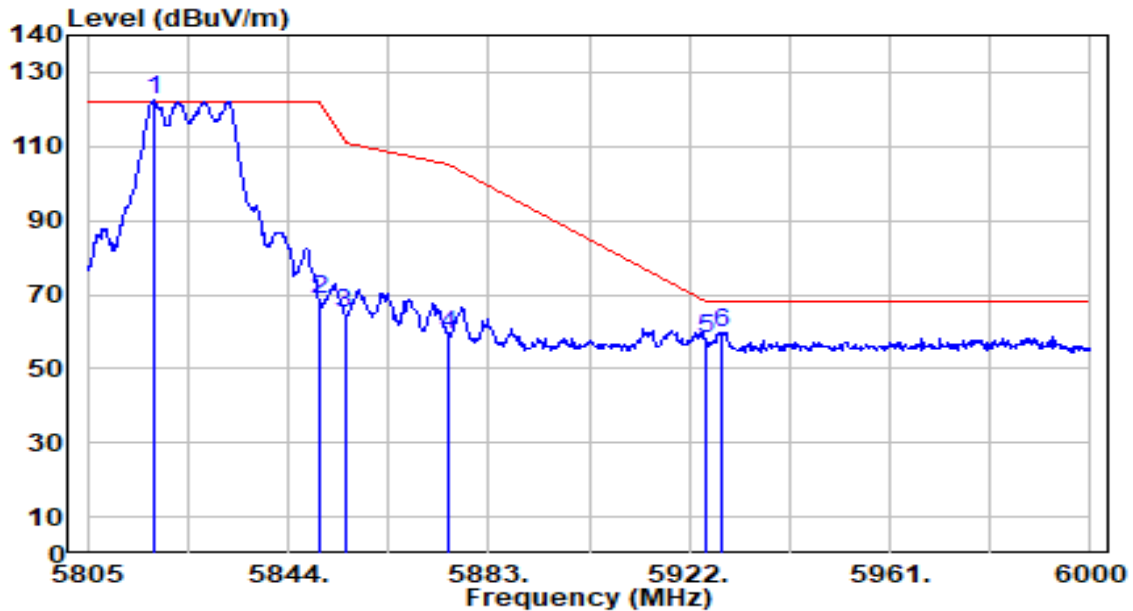


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5817.870	120.14	2.25	122.39	N/A	N/A	200	173	Peak
2	5850.000	66.19	2.25	68.45	-53.75	122.20	200	173	Peak
3	5855.000	62.59	2.25	64.85	-45.95	110.80	200	173	Peak
4	5875.000	57.13	2.26	59.39	-45.81	105.20	200	173	Peak
5	5925.000	55.60	2.27	57.87	-10.33	68.20	200	173	Peak
6	* 5928.240	57.69	2.27	59.96	-8.24	68.20	200	173	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

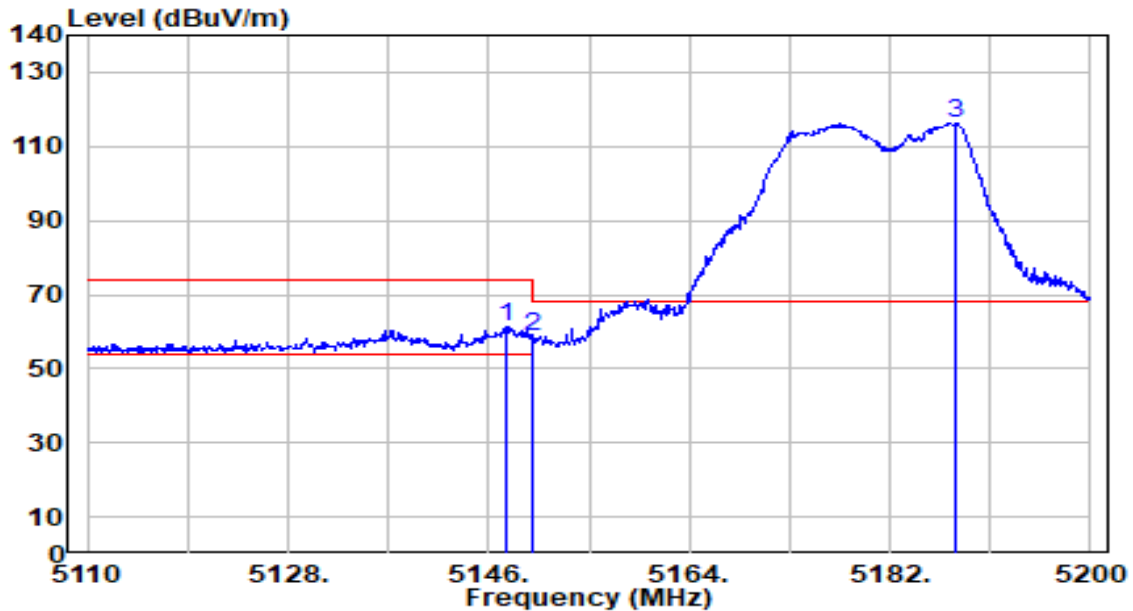


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.620	60.81	0.65	61.47	-12.53	74.00	199	242	Peak
2		5150.000	58.15	0.65	58.81	-15.19	74.00	199	242	Peak
3		5187.850	115.47	0.69	116.16	N/A	N/A	199	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

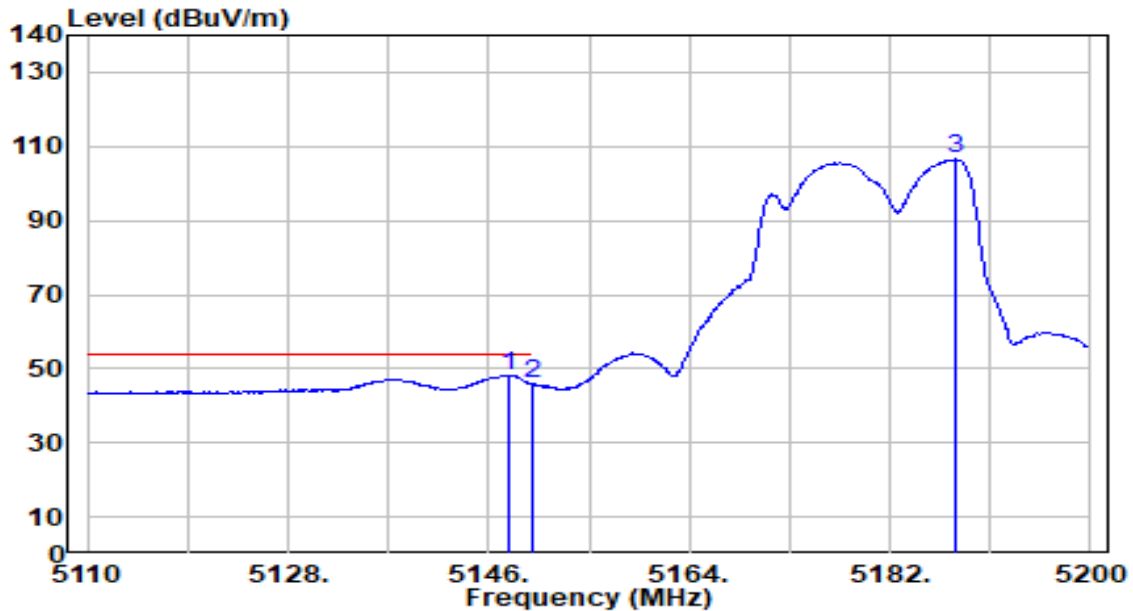


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	47.53	0.65	48.18	-5.82	54.00	199	242	Average
2		5150.000	45.12	0.65	45.77	-8.23	54.00	199	242	Average
3		5187.940	105.77	0.69	106.46	N/A	N/A	199	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

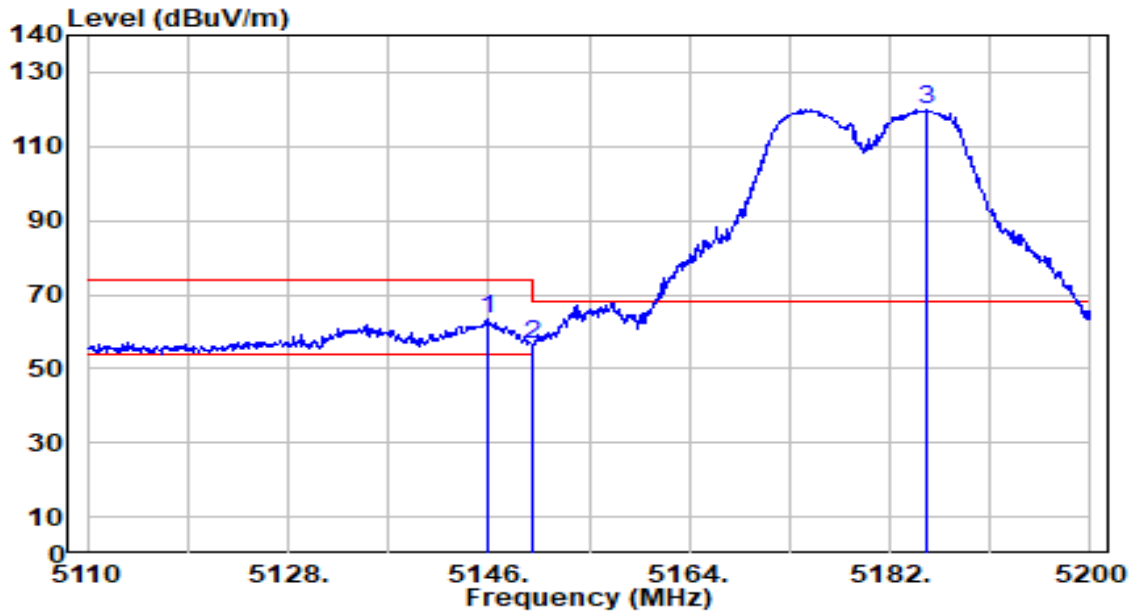


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.820	62.72	0.65	63.37	-10.63	74.00	170	171	Peak
2		5150.000	56.00	0.65	56.65	-17.35	74.00	170	171	Peak
3		5185.330	119.15	0.69	119.84	N/A	N/A	170	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

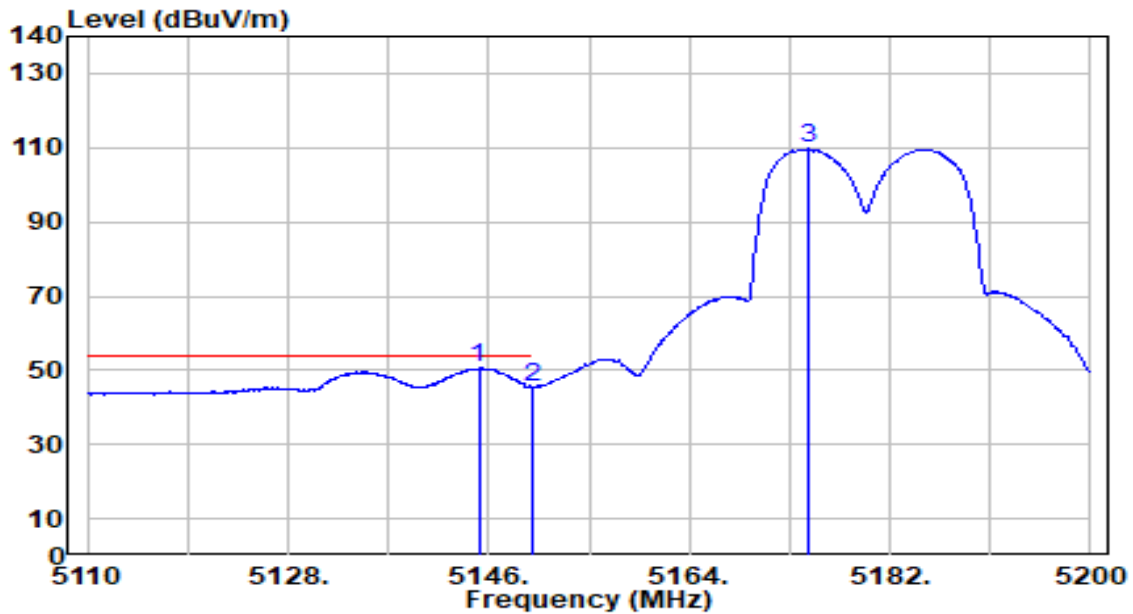


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.100	49.82	0.65	50.47	-3.53	54.00	170	171	Average
2		5150.000	44.83	0.65	45.49	-8.51	54.00	170	171	Average
3		5174.620	108.99	0.68	109.66	N/A	N/A	170	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

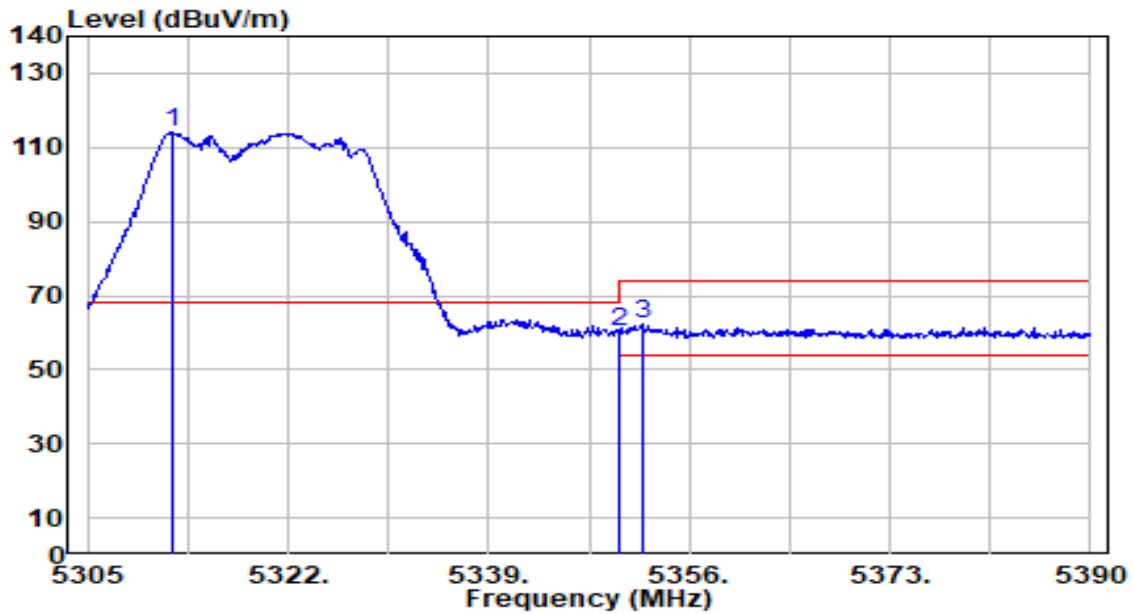


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.140	113.48	0.53	114.01	N/A	N/A	200	126	Peak
2	5350.000	59.98	0.47	60.45	-13.55	74.00	200	126	Peak
3	* 5352.005	61.67	0.47	62.14	-11.86	74.00	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

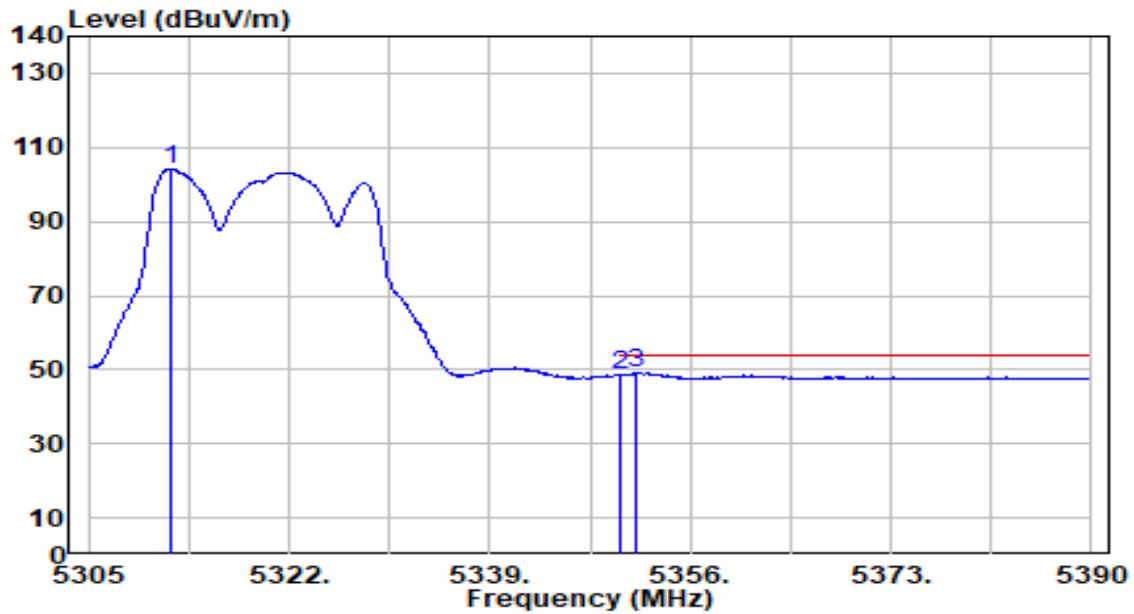


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.970	103.76	0.53	104.29	N/A	N/A	200	126	Average
2	5350.000	48.00	0.47	48.47	-5.53	54.00	200	126	Average
3	* 5351.325	48.61	0.47	49.08	-4.92	54.00	200	126	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

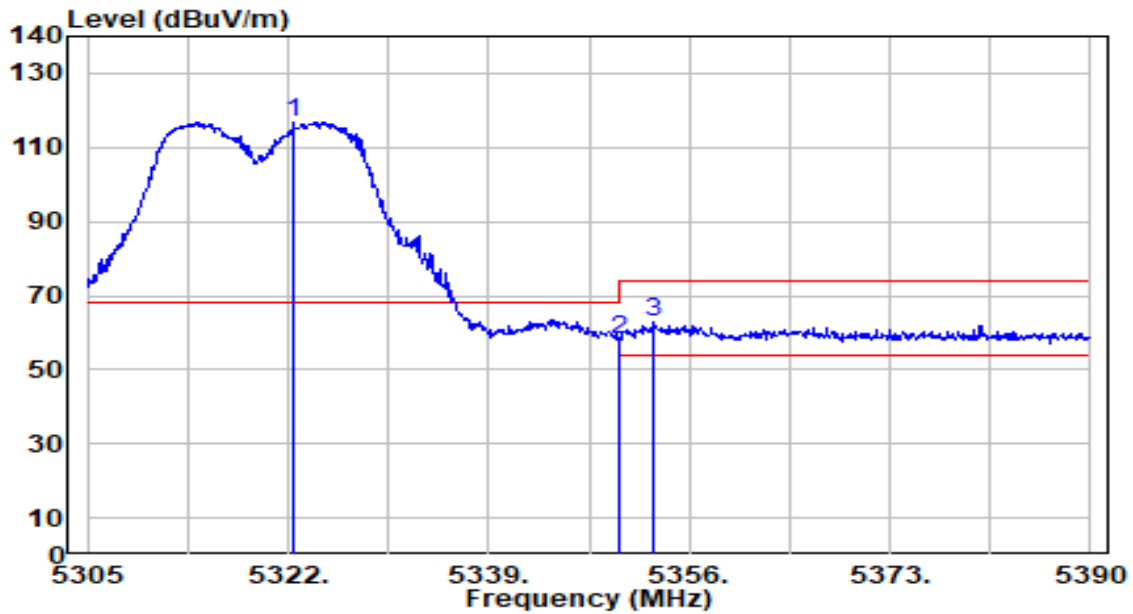


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.425	116.35	0.51	116.86	N/A	N/A	200	182	Peak
2	5350.000	57.85	0.47	58.32	-15.68	74.00	200	182	Peak
3	* 5353.025	62.21	0.47	62.67	-11.33	74.00	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

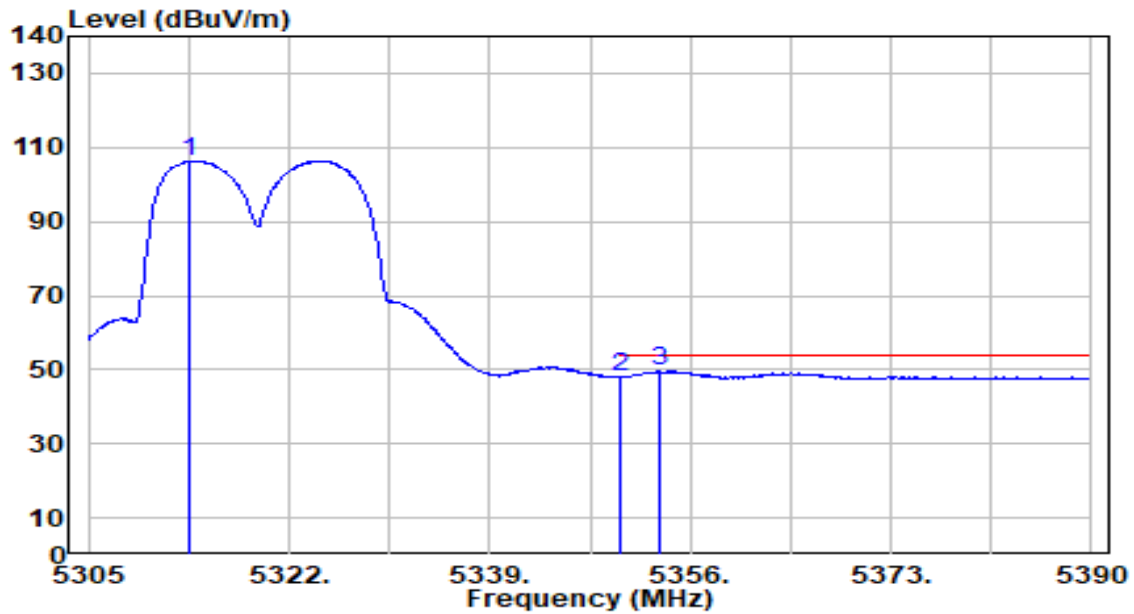


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.500	105.83	0.53	106.35	N/A	N/A	200	182	Average
2	5350.000	47.41	0.47	47.89	-6.11	54.00	200	182	Average
3	* 5353.365	49.12	0.47	49.58	-4.42	54.00	200	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

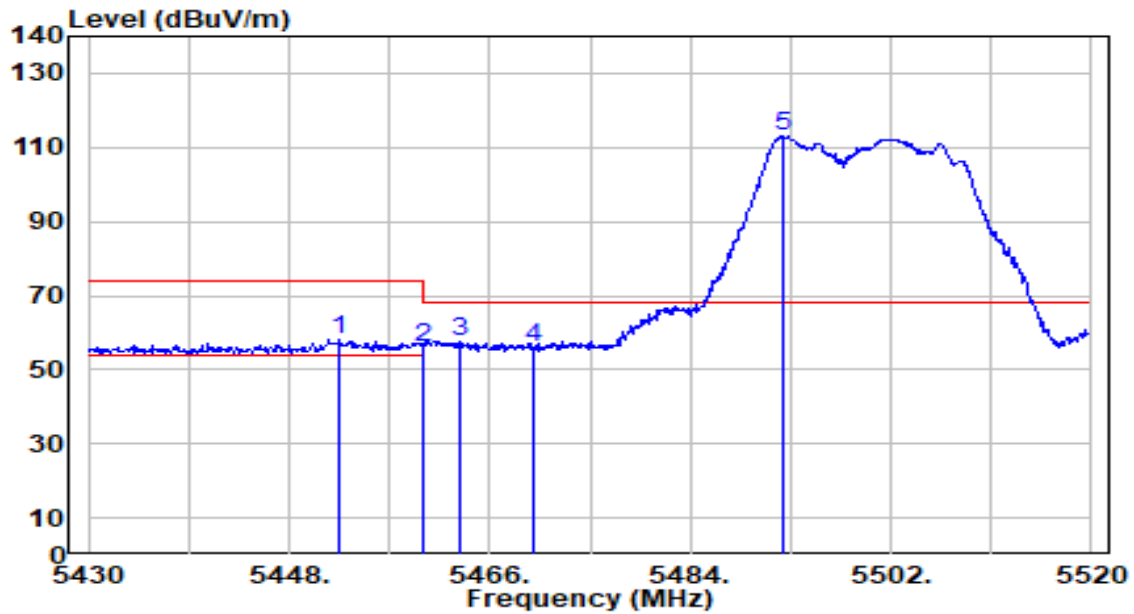


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.500	57.59	0.63	58.22	-15.78	74.00	200	130	Peak
2	5460.000	55.29	0.66	55.95	-18.05	74.00	200	130	Peak
3	* 5463.300	57.01	0.68	57.69	-10.51	68.20	200	130	Peak
4	5470.000	55.44	0.71	56.15	-12.05	68.20	200	130	Peak
5	5492.370	112.02	0.81	112.82	N/A	N/A	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

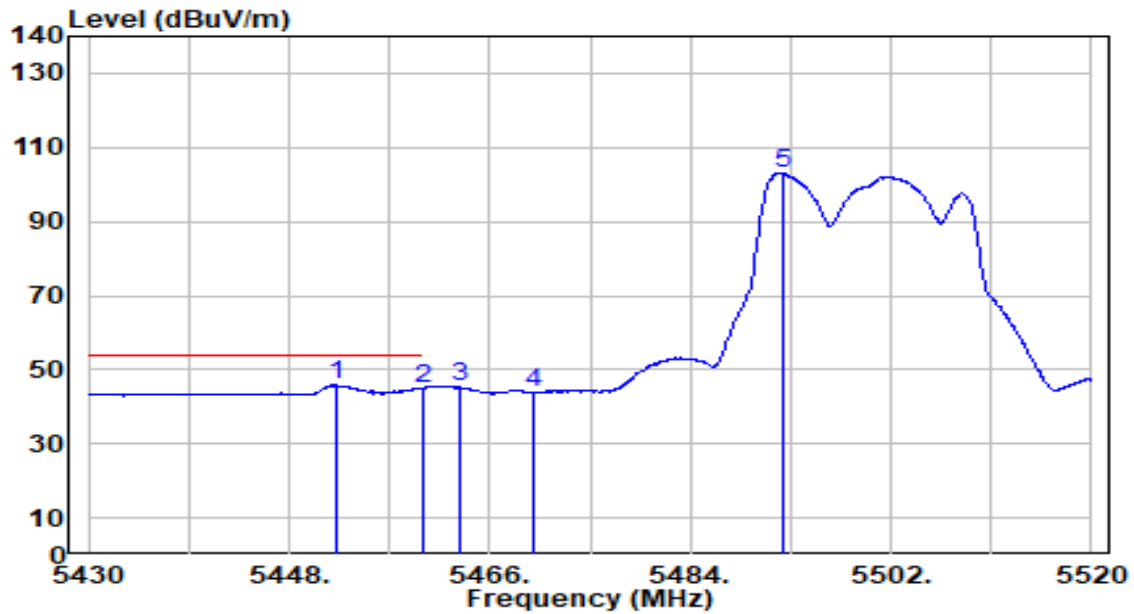


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.230	45.17	0.63	45.80	-8.20	54.00	200	130	Average
2		5460.000	44.41	0.66	45.07	-8.93	54.00	200	130	Average
3		5463.300	44.58	0.68	45.26	N/A	N/A	200	130	Average
4		5470.000	43.17	0.71	43.88	N/A	N/A	200	130	Average
5		5492.280	102.25	0.81	103.05	N/A	N/A	200	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

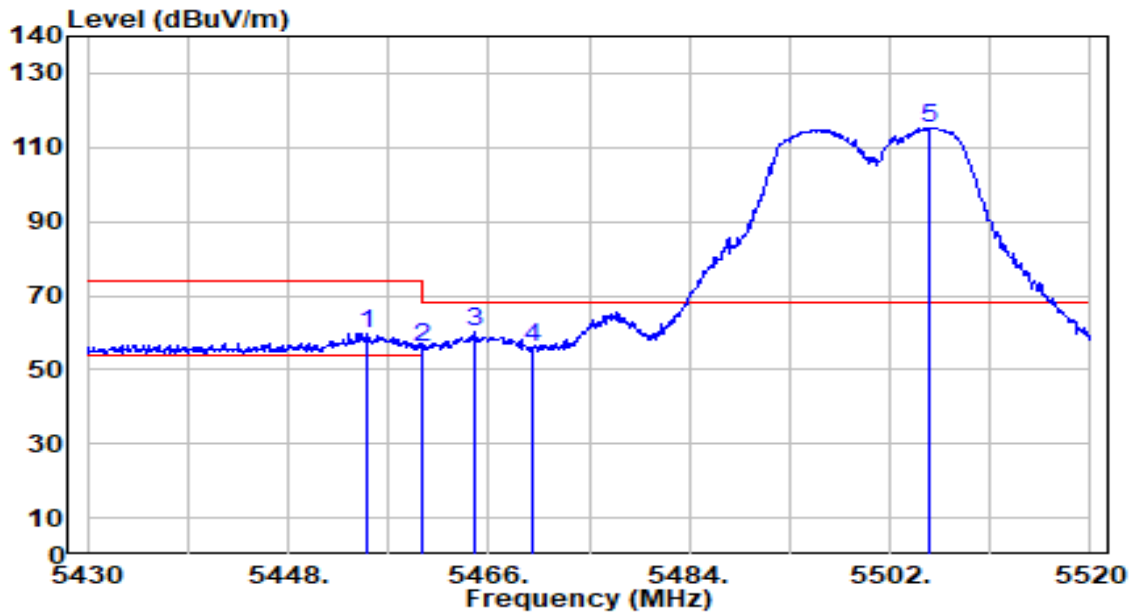


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.110	59.15	0.64	59.79	-14.21	74.00	200	164	Peak
2	5460.000	55.57	0.66	56.23	-17.77	74.00	200	164	Peak
3	* 5464.650	59.38	0.68	60.07	-8.13	68.20	200	164	Peak
4	5470.000	55.50	0.71	56.20	-12.00	68.20	200	164	Peak
5	5505.510	114.51	0.87	115.38	N/A	N/A	200	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

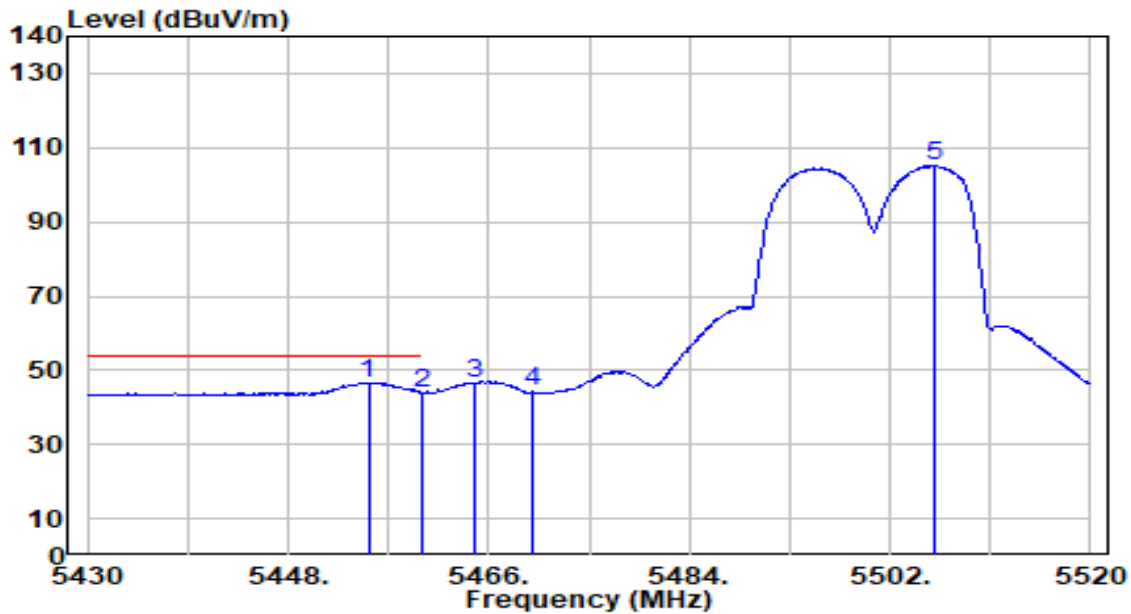


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.200	46.07	0.64	46.71	-7.29	54.00	200	164	Average
2		5460.000	43.31	0.66	43.97	-10.03	54.00	200	164	Average
3		5464.650	45.81	0.68	46.49	N/A	N/A	200	164	Average
4		5470.000	43.43	0.71	44.14	N/A	N/A	200	164	Average
5		5505.960	104.16	0.87	105.03	N/A	N/A	200	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

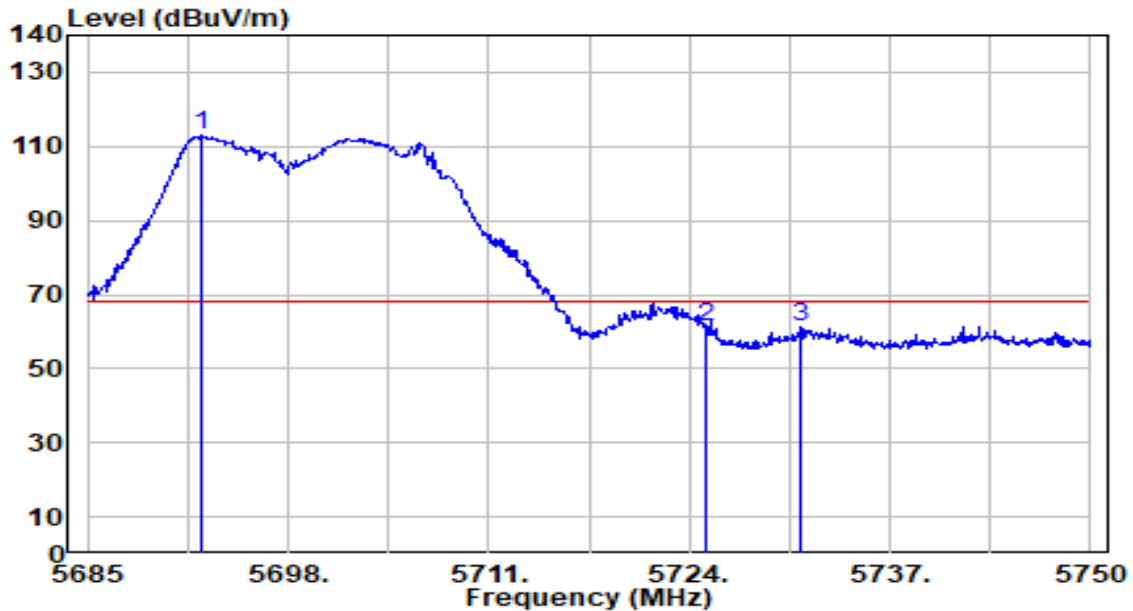


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5692.410	111.05	1.74	112.79	N/A	N/A	200	118	Peak
2	5725.000	59.25	1.89	61.15	-7.05	68.20	200	118	Peak
3	* 5731.150	59.51	1.92	61.43	-6.77	68.20	200	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

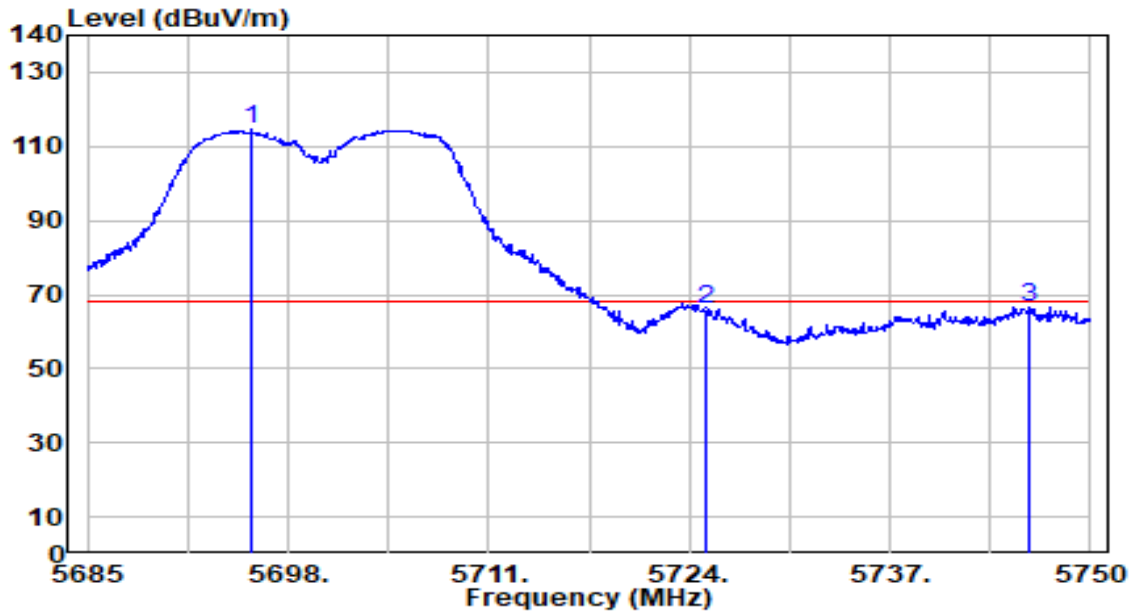


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.660	112.74	1.76	114.50	N/A	N/A	200	182	Peak
2	5725.000	64.20	1.89	66.09	-2.11	68.20	200	182	Peak
3	* 5746.035	64.79	1.99	66.78	-1.42	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

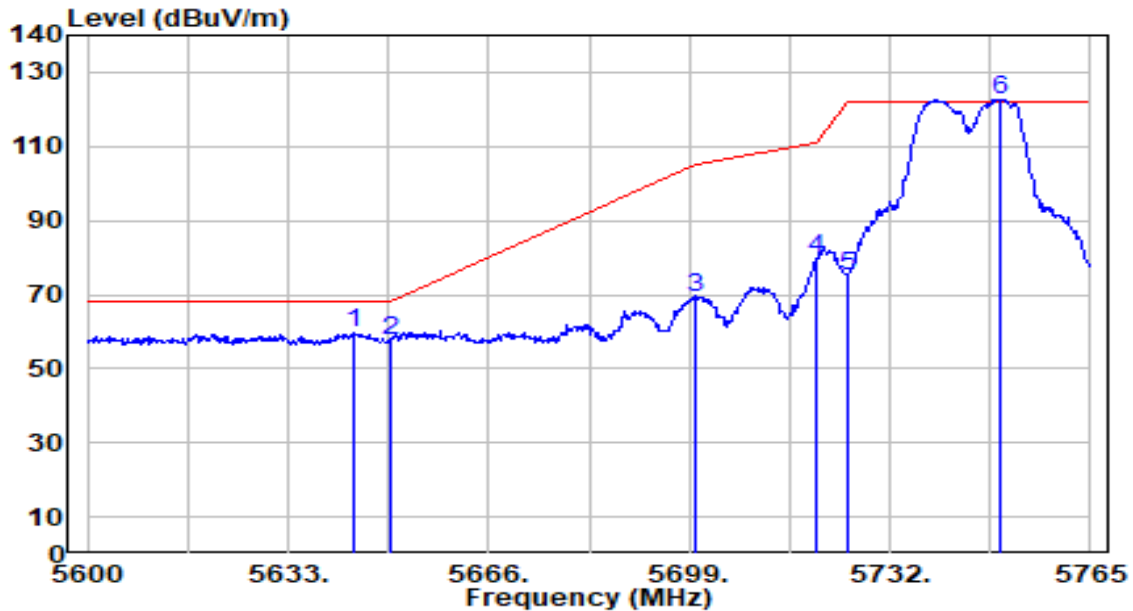


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.725	58.10	1.51	59.61	-8.59	68.20	200	119	Peak
2		5650.000	55.86	1.54	57.40	-10.80	68.20	200	119	Peak
3		5700.000	67.60	1.78	69.37	-35.83	105.20	200	119	Peak
4		5720.000	77.88	1.87	79.75	-31.05	110.80	200	119	Peak
5		5725.000	73.30	1.89	75.19	-47.01	122.20	200	119	Peak
6		5750.315	120.72	2.01	122.73	N/A	N/A	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

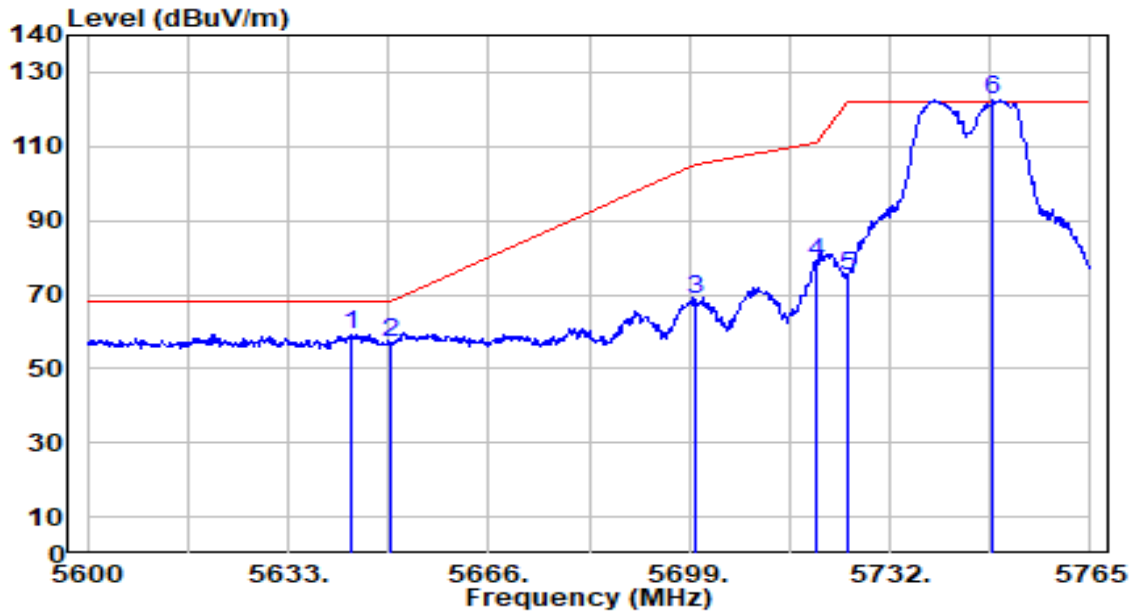


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.560	57.84	1.51	59.35	-8.85	68.20	200	183	Peak
2		5650.000	55.64	1.54	57.18	-11.02	68.20	200	183	Peak
3		5700.000	66.76	1.78	68.54	-36.66	105.20	200	183	Peak
4		5720.000	76.83	1.87	78.70	-32.10	110.80	200	183	Peak
5		5725.000	72.90	1.89	74.80	-47.40	122.20	200	183	Peak
6		5748.995	120.41	2.01	122.42	N/A	N/A	200	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

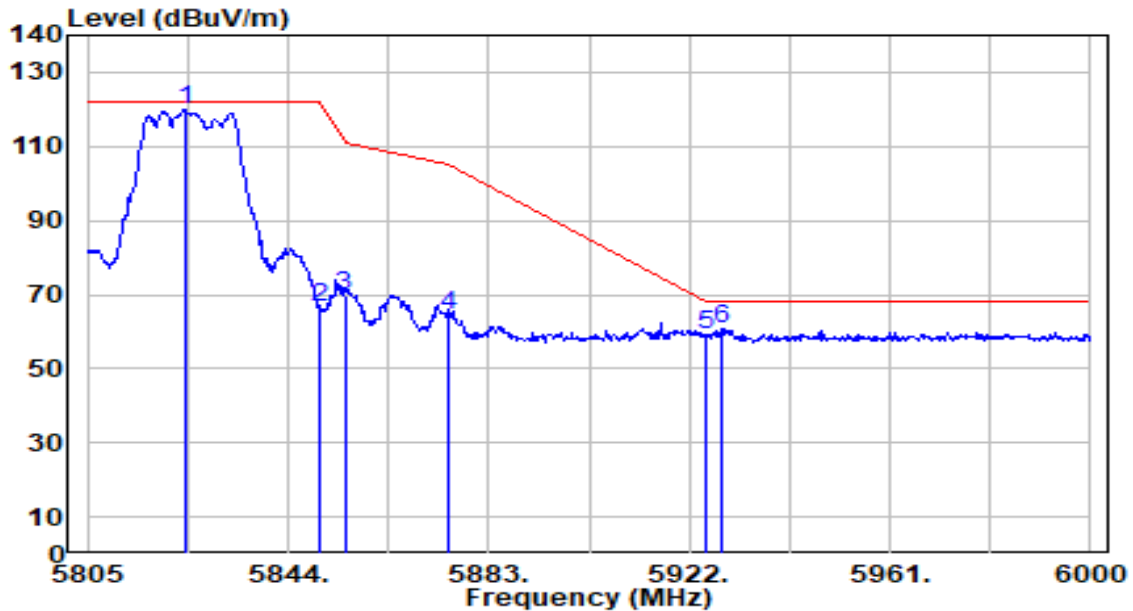


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.305	117.57	2.25	119.82	N/A	N/A	200	181	Peak
2	5850.000	64.49	2.25	66.74	-55.46	122.20	200	181	Peak
3	5855.000	67.36	2.25	69.61	-41.19	110.80	200	181	Peak
4	5875.000	62.29	2.26	64.54	-40.66	105.20	200	181	Peak
5	5925.000	57.09	2.27	59.36	-8.84	68.20	200	181	Peak
6	* 5928.435	58.47	2.27	60.74	-7.46	68.20	200	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

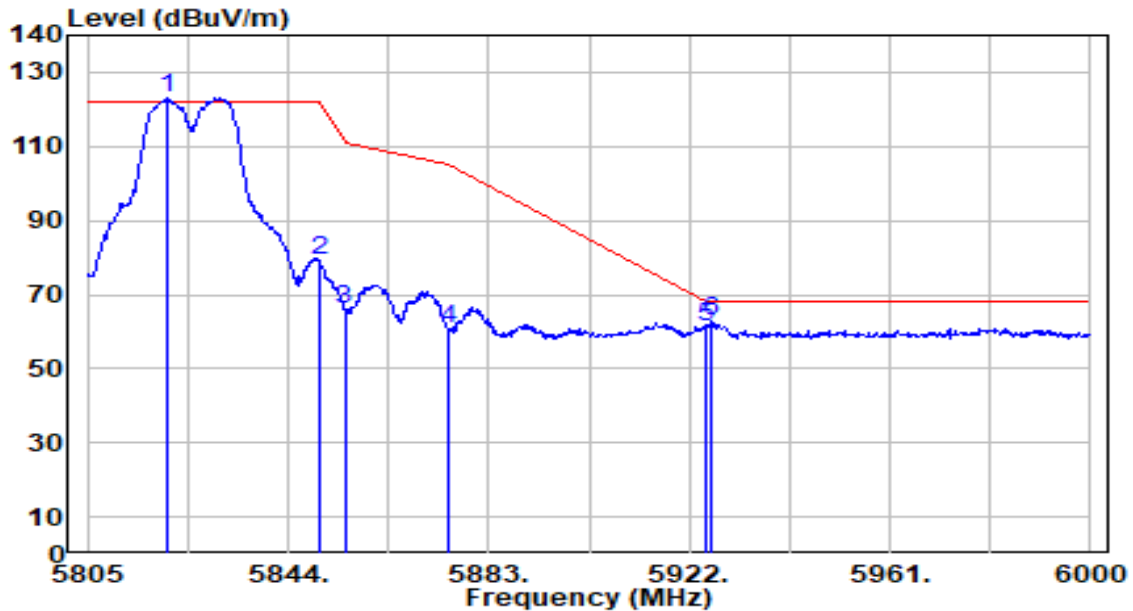


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.405	120.96	2.25	123.21	N/A	N/A	200	173	Peak
2	5850.000	77.08	2.25	79.33	-42.87	122.20	200	173	Peak
3	5855.000	63.66	2.25	65.92	-44.88	110.80	200	173	Peak
4	5875.000	58.50	2.26	60.76	-44.44	105.20	200	173	Peak
5	5925.000	58.78	2.27	61.04	-7.16	68.20	200	173	Peak
6	* 5926.290	60.60	2.27	62.87	-5.33	68.20	200	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

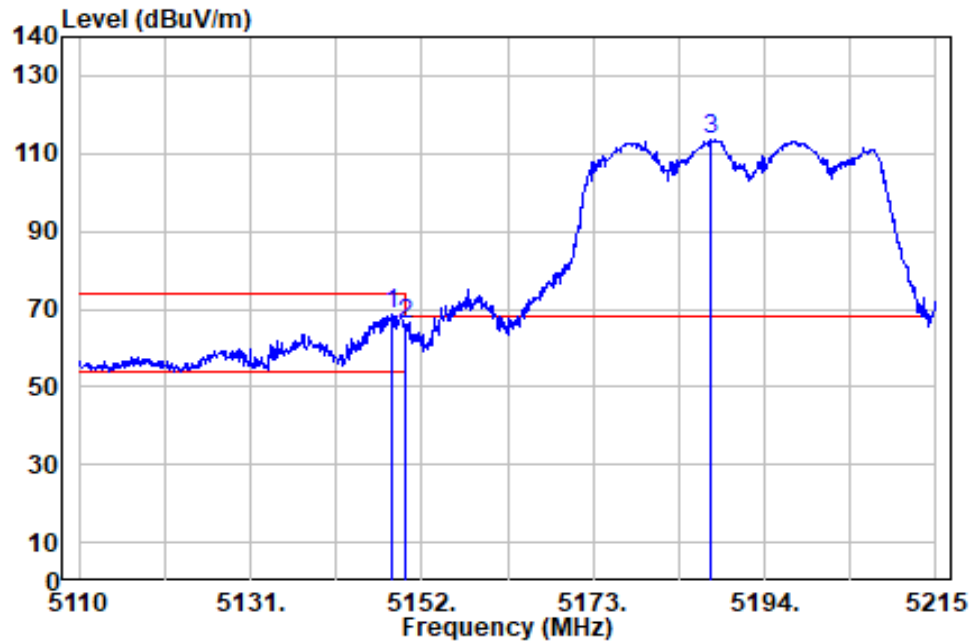


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.325	68.28	0.65	68.93	-5.07	74.00	199	242	Peak
2		5150.000	65.49	0.65	66.14	-7.86	74.00	199	242	Peak
3		5187.280	112.87	0.69	113.55	N/A	N/A	199	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

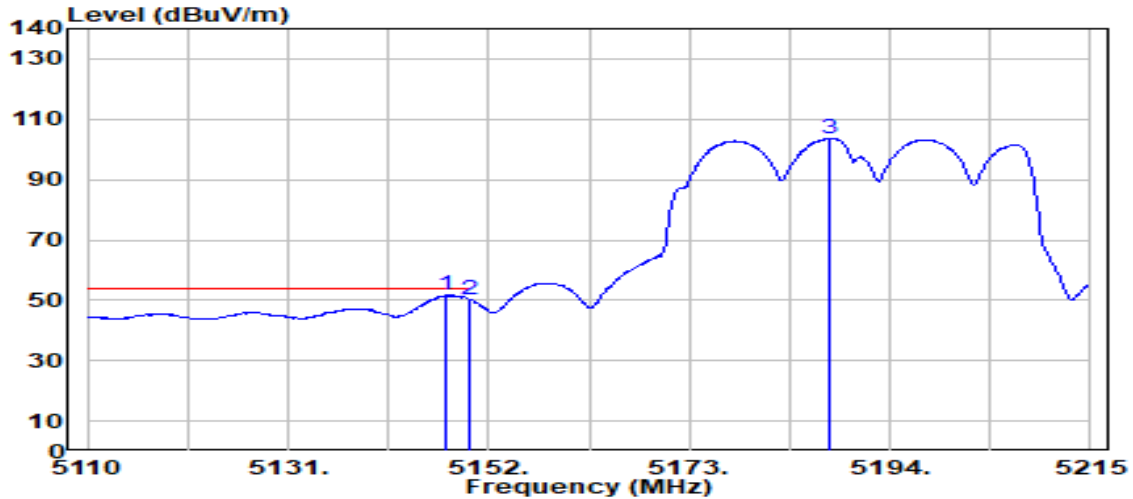


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.590	51.05	0.65	51.70	-2.30	54.00	199	242	Average
2		5150.000	49.67	0.65	50.32	-3.68	54.00	199	242	Average
3		5187.700	102.85	0.69	103.54	N/A	N/A	199	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

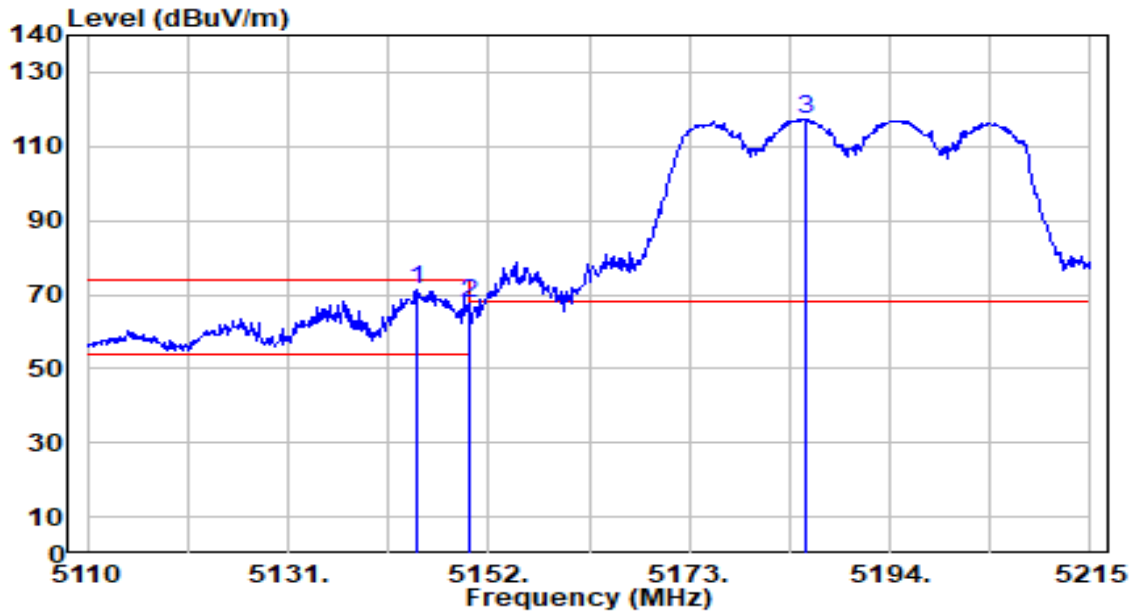


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.440	70.74	0.65	71.39	-2.61	74.00	170	171	Peak
2		5150.000	67.14	0.65	67.80	-6.20	74.00	170	171	Peak
3		5185.075	116.66	0.69	117.34	N/A	N/A	170	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

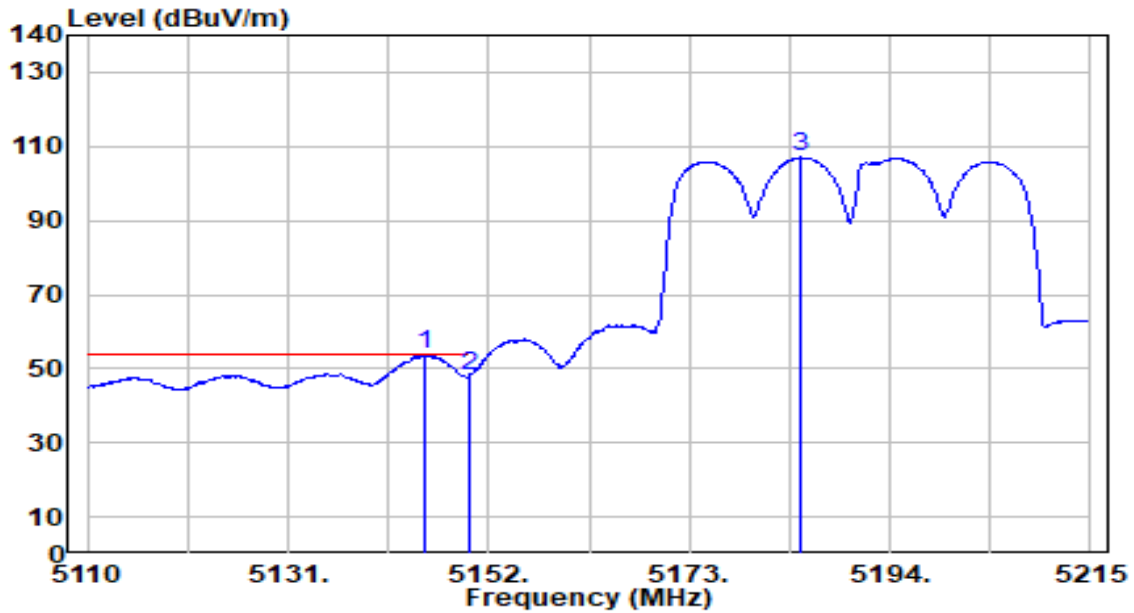


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.280	53.05	0.65	53.70	-0.30	54.00	170	171	Average
2		5150.000	47.41	0.65	48.06	-5.94	54.00	170	171	Average
3		5184.550	106.51	0.69	107.20	N/A	N/A	170	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

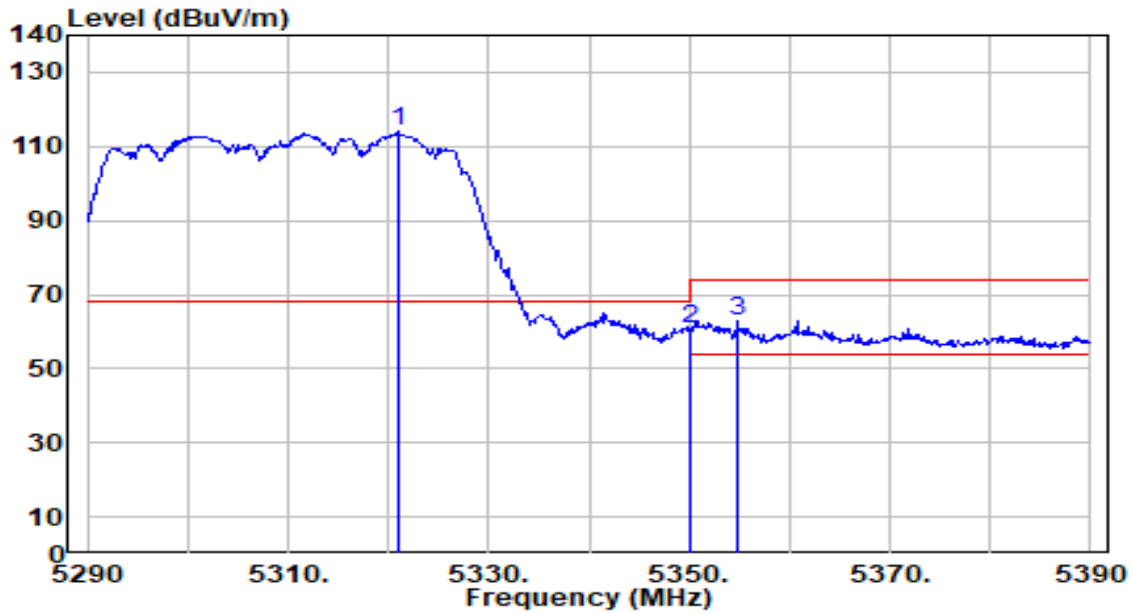


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.900	113.52	0.52	114.04	N/A	N/A	200	126	Peak
2	5350.000	60.31	0.47	60.78	-13.22	74.00	200	126	Peak
3	* 5354.800	62.32	0.46	62.79	-11.21	74.00	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

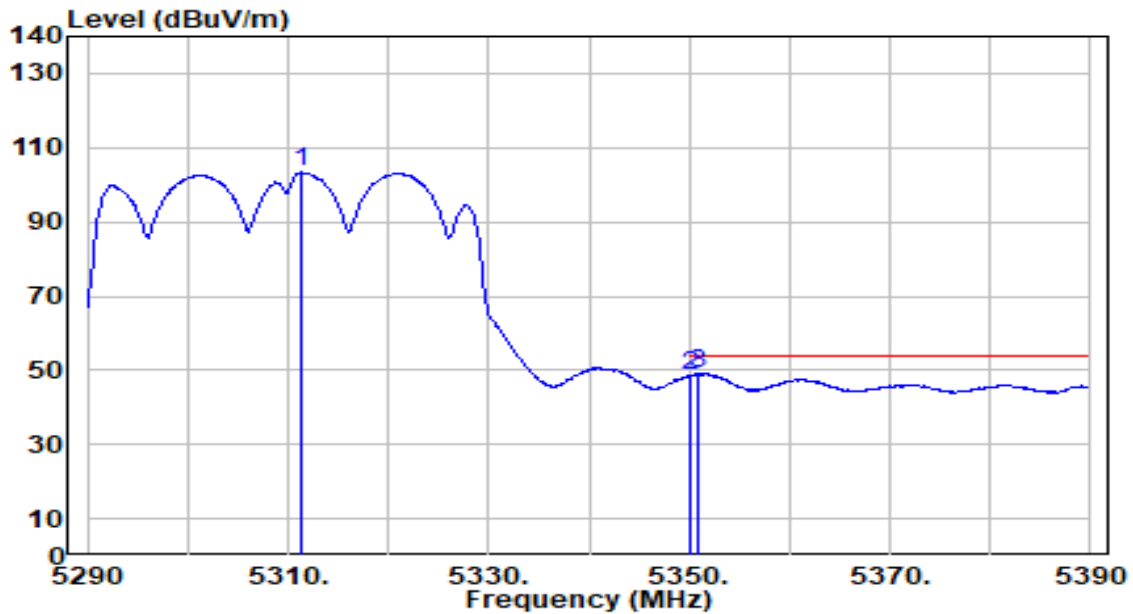


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.400	102.82	0.53	103.35	N/A	N/A	200	126	Average
2	5350.000	48.07	0.47	48.54	-5.46	54.00	200	126	Average
3	* 5351.000	48.60	0.47	49.06	-4.94	54.00	200	126	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

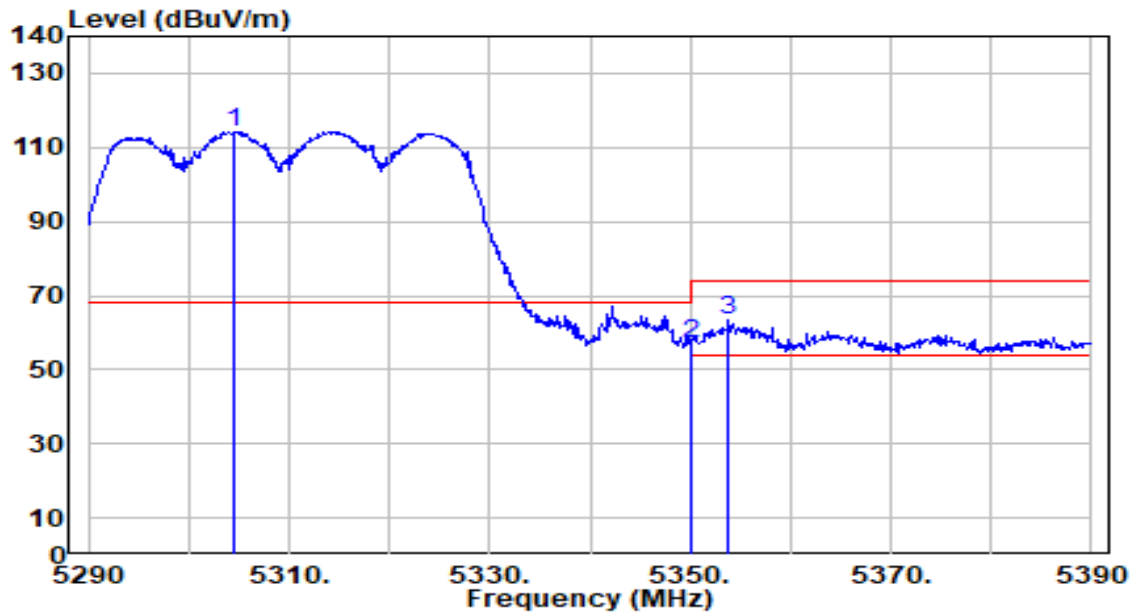


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.600	113.69	0.54	114.23	N/A	N/A	200	182	Peak
2	5350.000	56.43	0.47	56.90	-17.10	74.00	200	182	Peak
3	* 5353.800	62.86	0.47	63.33	-10.67	74.00	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

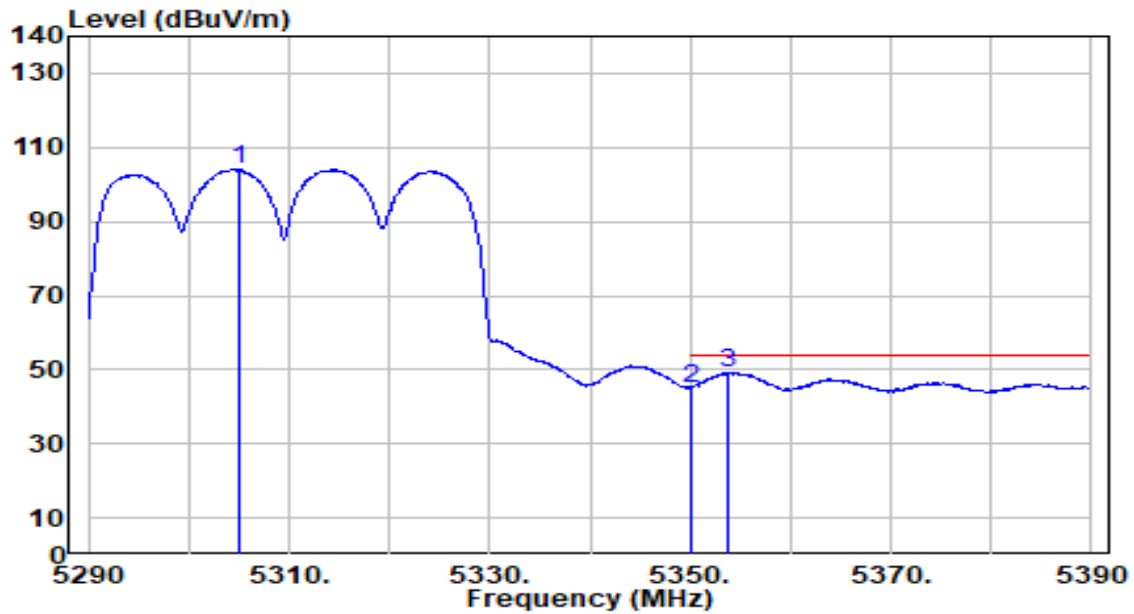


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5305.100	103.46	0.54	104.01	N/A	N/A	200	182	Average
2	5350.000	44.65	0.47	45.12	-8.88	54.00	200	182	Average
3	* 5353.700	48.63	0.47	49.10	-4.90	54.00	200	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

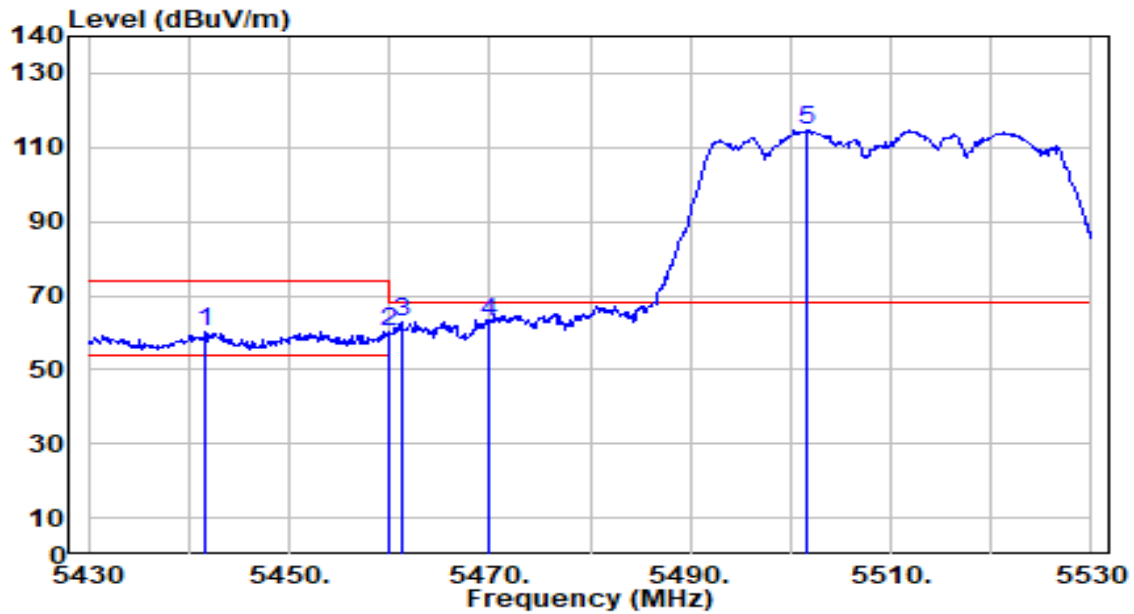


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.700	59.86	0.58	60.44	-13.56	74.00	200	130	Peak
2	5460.000	59.42	0.66	60.08	-13.92	74.00	200	130	Peak
3	5461.200	62.04	0.67	62.71	-5.49	68.20	200	130	Peak
4	* 5470.000	62.14	0.71	62.85	-5.35	68.20	200	130	Peak
5	5501.600	113.59	0.85	114.44	N/A	N/A	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

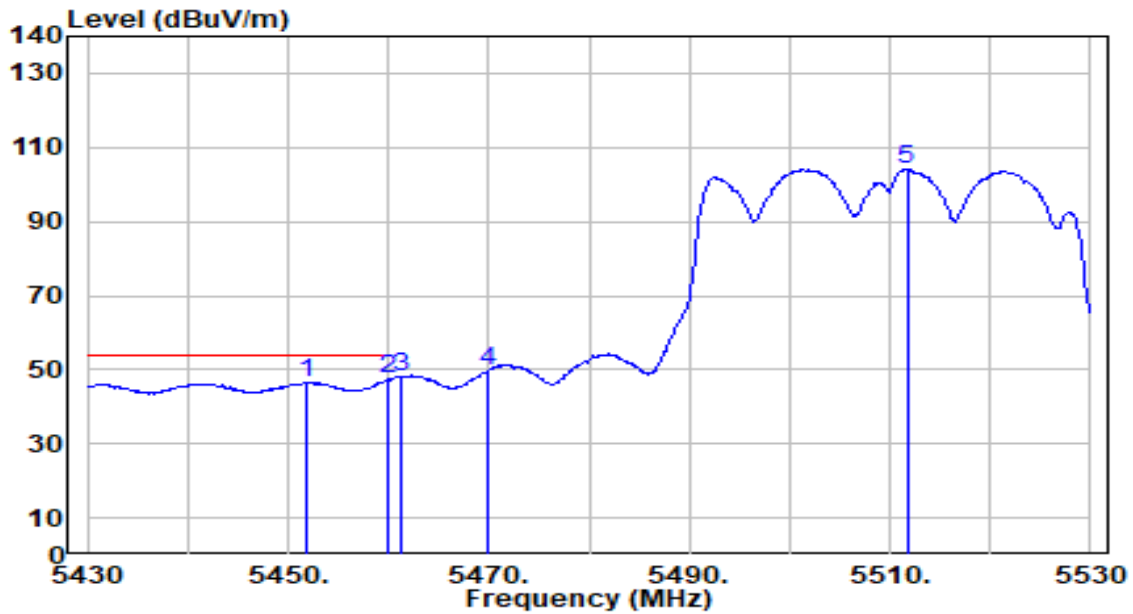


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5451.900	45.94	0.63	46.57	-7.43	54.00	200	130	Average
2	*	5460.000	46.83	0.66	47.49	-6.51	54.00	200	130	Average
3		5461.200	47.43	0.67	48.09	N/A	N/A	200	130	Average
4		5470.000	49.21	0.71	49.91	N/A	N/A	200	130	Average
5		5511.700	103.16	0.89	104.06	N/A	N/A	200	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

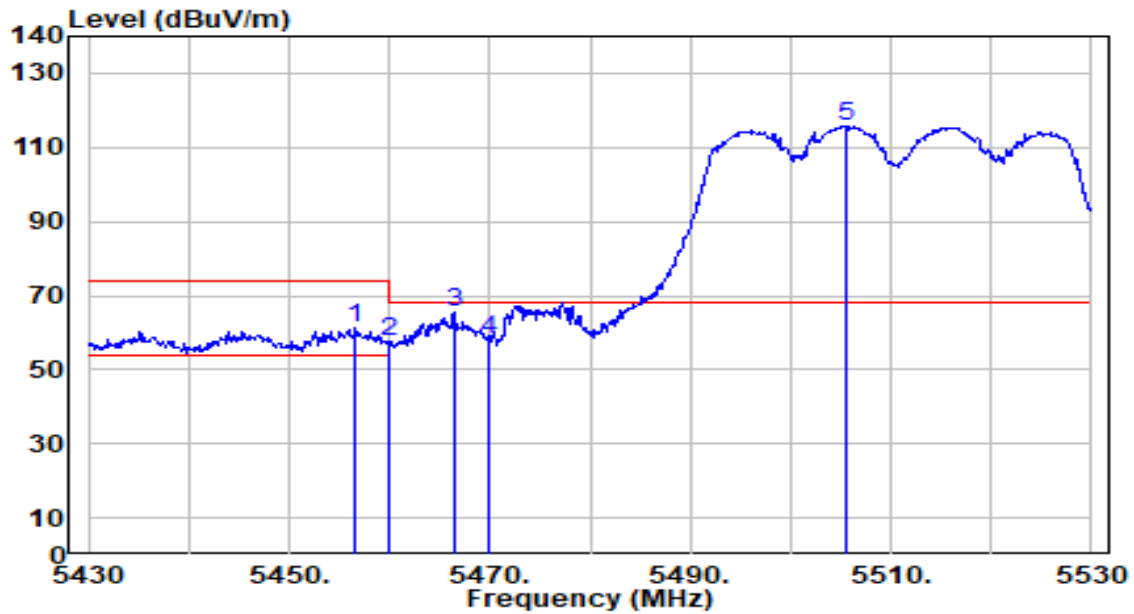


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.600	60.74	0.65	61.39	-12.61	74.00	200	164	Peak
2	5460.000	56.88	0.66	57.54	-16.46	74.00	200	164	Peak
3	* 5466.400	64.87	0.69	65.56	-2.64	68.20	200	164	Peak
4	5470.000	57.34	0.71	58.05	-10.15	68.20	200	164	Peak
5	5505.500	114.96	0.87	115.83	N/A	N/A	200	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

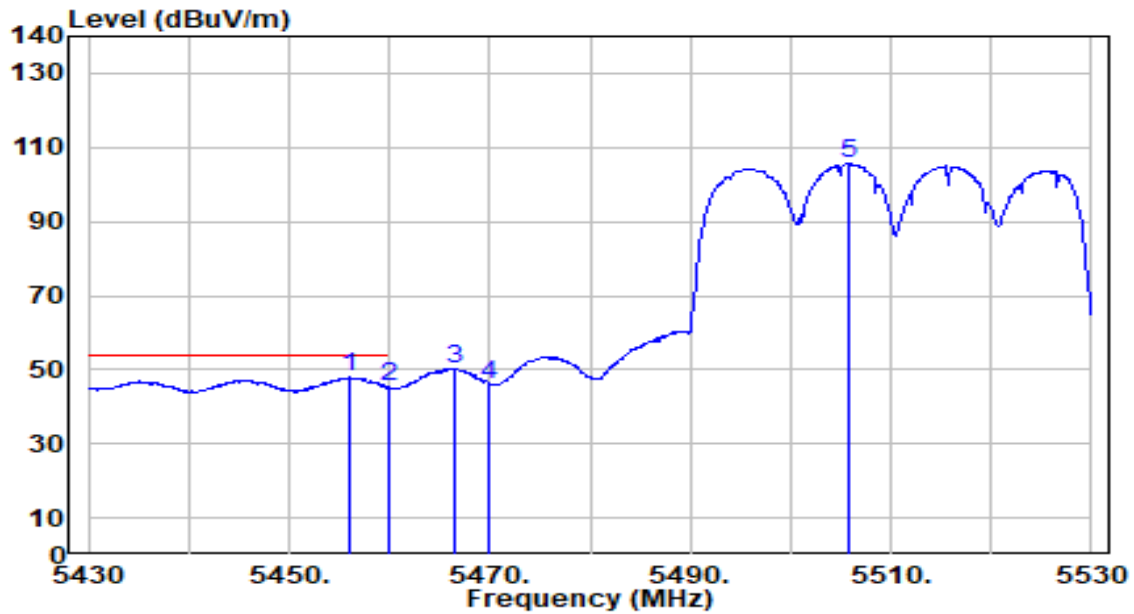


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.000	47.21	0.64	47.86	-6.14	54.00	200	164	Average
2		5460.000	44.65	0.66	45.31	-8.69	54.00	200	164	Average
3		5466.400	49.54	0.69	50.23	N/A	N/A	200	164	Average
4		5470.000	45.38	0.71	46.09	N/A	N/A	200	164	Average
5		5505.800	104.68	0.87	105.55	N/A	N/A	200	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

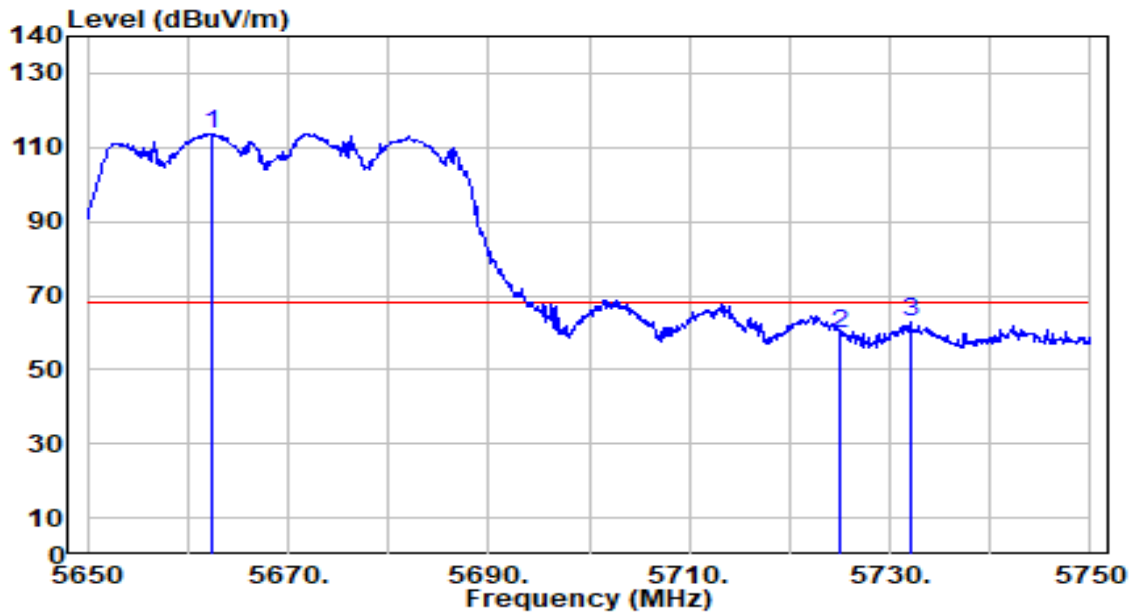


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5662.300	112.23	1.60	113.83	N/A	N/A	200	118	Peak
2	5725.000	58.05	1.89	59.95	-8.25	68.20	200	118	Peak
3	* 5732.100	60.79	1.93	62.71	-5.49	68.20	200	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

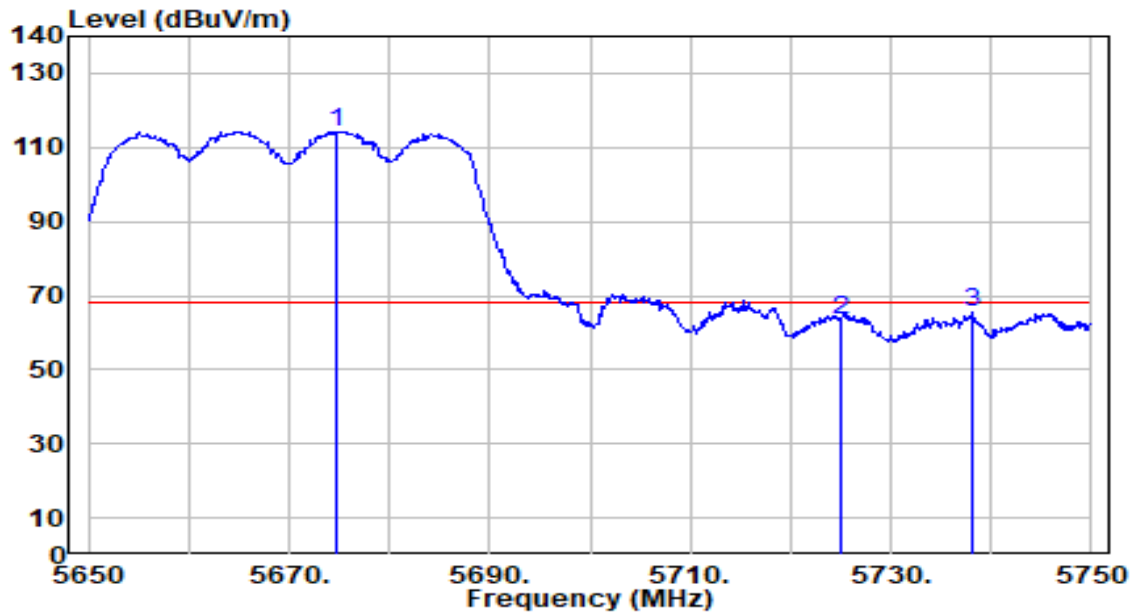


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5674.700	112.65	1.66	114.31	N/A	N/A	200	182	Peak
2	5725.000	61.59	1.89	63.49	-4.71	68.20	200	182	Peak
3	* 5738.200	63.69	1.95	65.65	-2.55	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

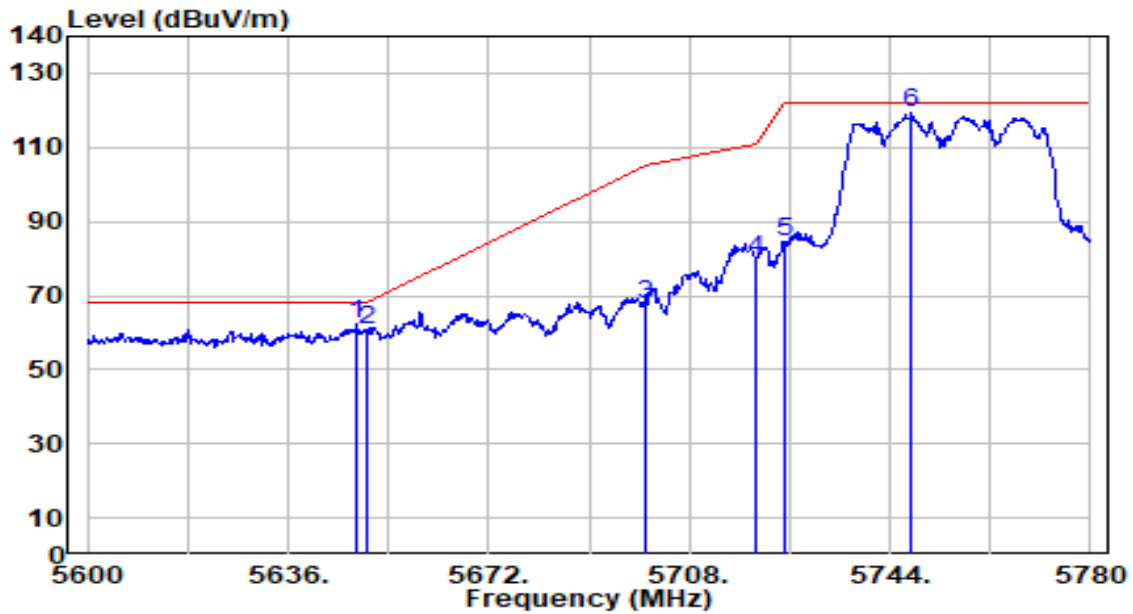


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.420	60.59	1.53	62.12	-6.08	68.20	200	119	Peak
2		5650.000	59.05	1.54	60.59	-7.61	68.20	200	119	Peak
3		5700.000	65.84	1.78	67.62	-37.58	105.20	200	119	Peak
4		5720.000	78.00	1.87	79.87	-30.93	110.80	200	119	Peak
5		5725.000	82.45	1.89	84.34	-37.86	122.20	200	119	Peak
6		5747.960	117.23	2.00	119.23	N/A	N/A	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

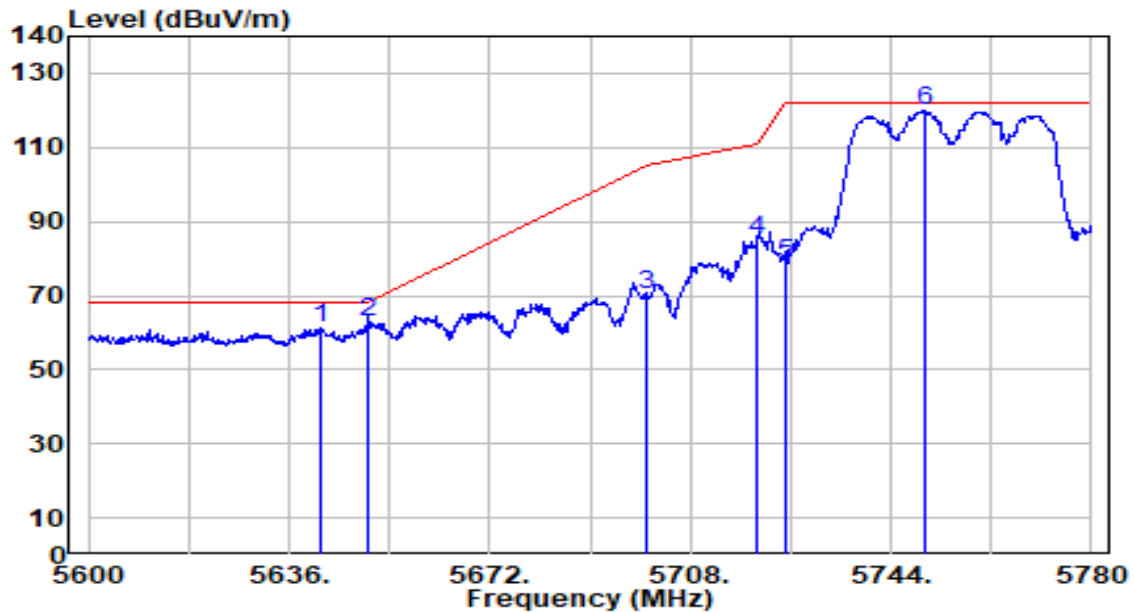


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5641.760	60.01	1.50	61.52	-6.68	68.20	200	183	Peak
2	* 5650.000	61.33	1.54	62.87	-5.33	68.20	200	183	Peak
3	5700.000	68.56	1.78	70.34	-34.86	105.20	200	183	Peak
4	5720.000	83.37	1.87	85.24	-25.56	110.80	200	183	Peak
5	5725.000	76.93	1.89	78.82	-43.38	122.20	200	183	Peak
6	5749.940	117.74	2.01	119.75	N/A	N/A	200	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

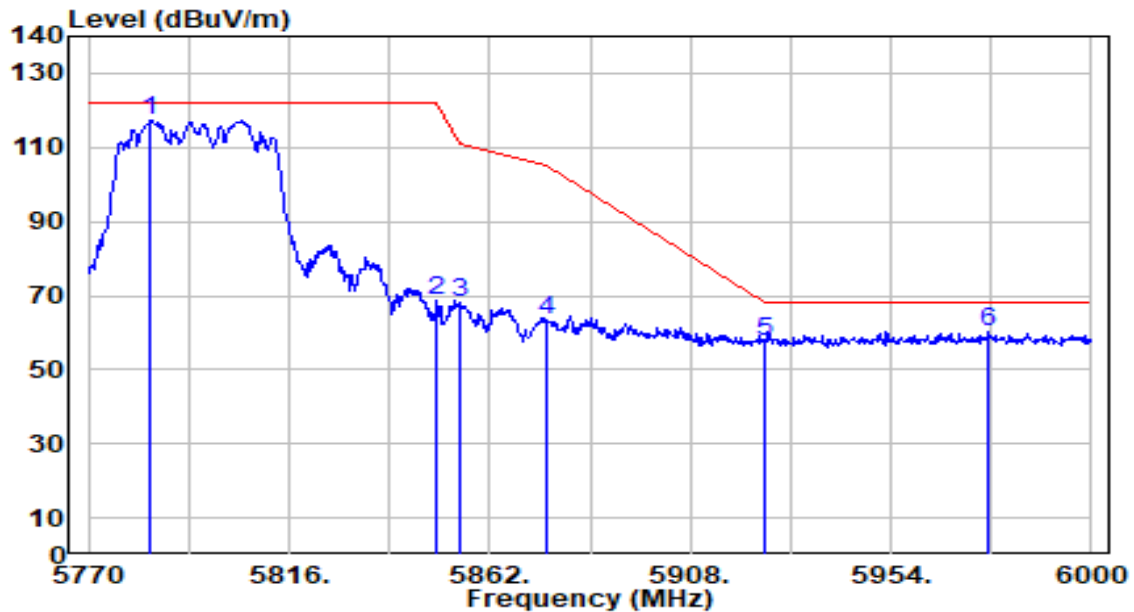


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5784.260	115.25	2.17	117.42	N/A	N/A	200	181	Peak
2	5850.000	66.50	2.25	68.76	-53.44	122.20	200	181	Peak
3	5855.000	65.66	2.25	67.91	-42.89	110.80	200	181	Peak
4	5875.000	61.24	2.26	63.49	-41.71	105.20	200	181	Peak
5	5925.000	55.15	2.27	57.42	-10.78	68.20	200	181	Peak
6	* 5976.540	58.09	2.28	60.37	-7.83	68.20	200	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

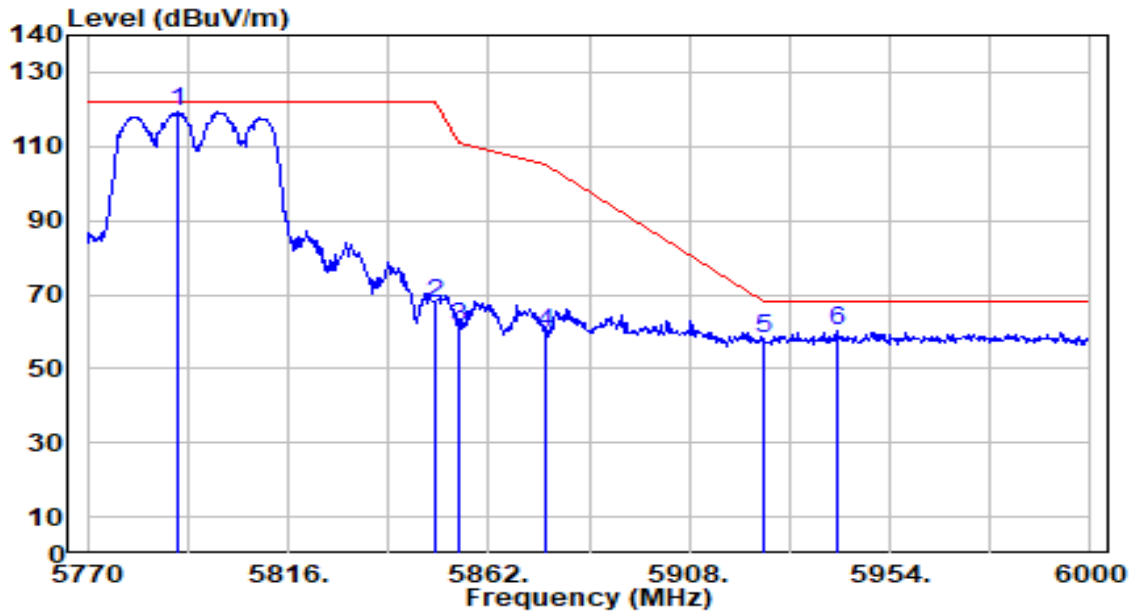


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.930	117.11	2.20	119.32	N/A	N/A	200	173	Peak
2	5850.000	65.24	2.25	67.49	-54.71	122.20	200	173	Peak
3	5855.000	59.09	2.25	61.35	-49.45	110.80	200	173	Peak
4	5875.000	57.22	2.26	59.47	-45.73	105.20	200	173	Peak
5	5925.000	55.79	2.27	58.06	-10.14	68.20	200	173	Peak
6	* 5941.810	57.72	2.27	59.99	-8.21	68.20	200	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

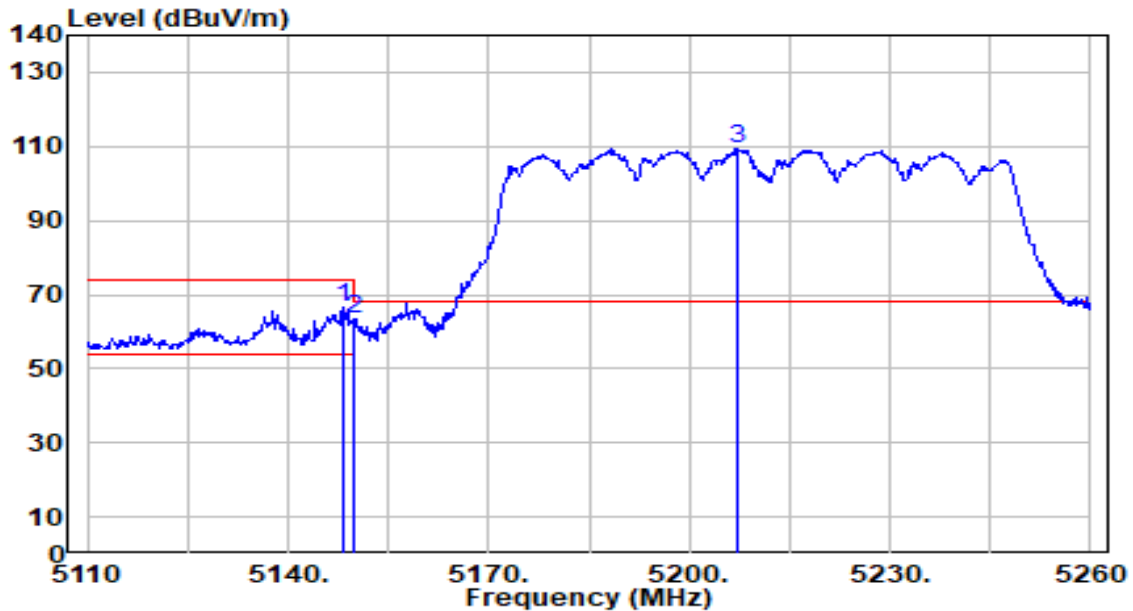


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.250	66.08	0.65	66.73	-7.27	74.00	199	242	Peak
2		5150.000	62.77	0.65	63.43	-10.57	74.00	199	242	Peak
3		5207.050	108.91	0.69	109.60	N/A	N/A	199	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

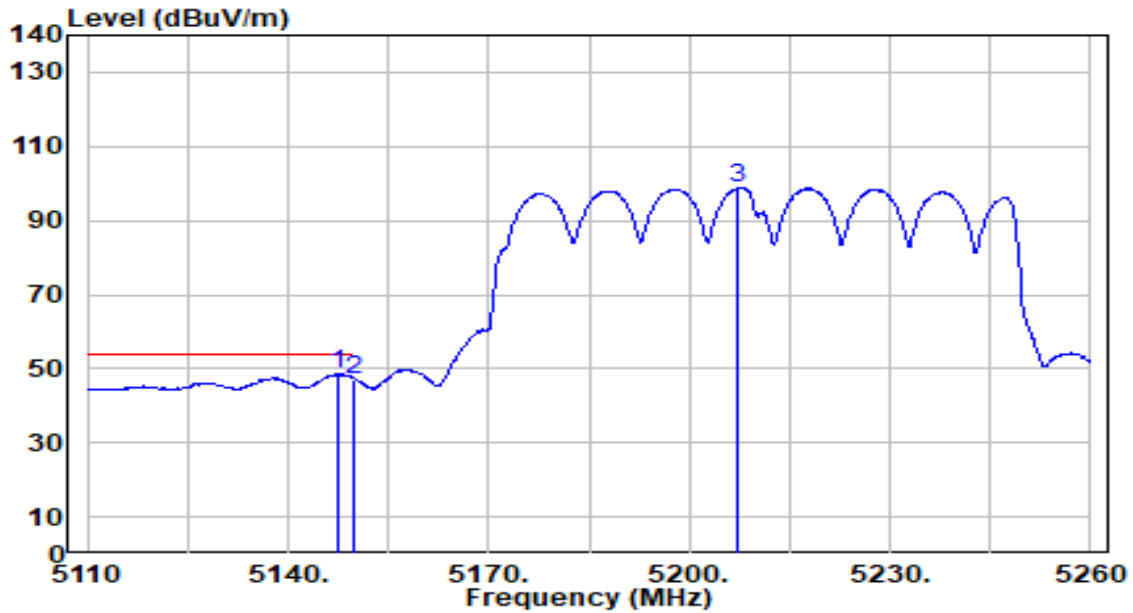


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.650	47.92	0.65	48.58	-5.42	54.00	199	242	Average
2		5150.000	46.42	0.65	47.07	-6.93	54.00	199	242	Average
3		5207.200	98.02	0.69	98.71	N/A	N/A	199	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

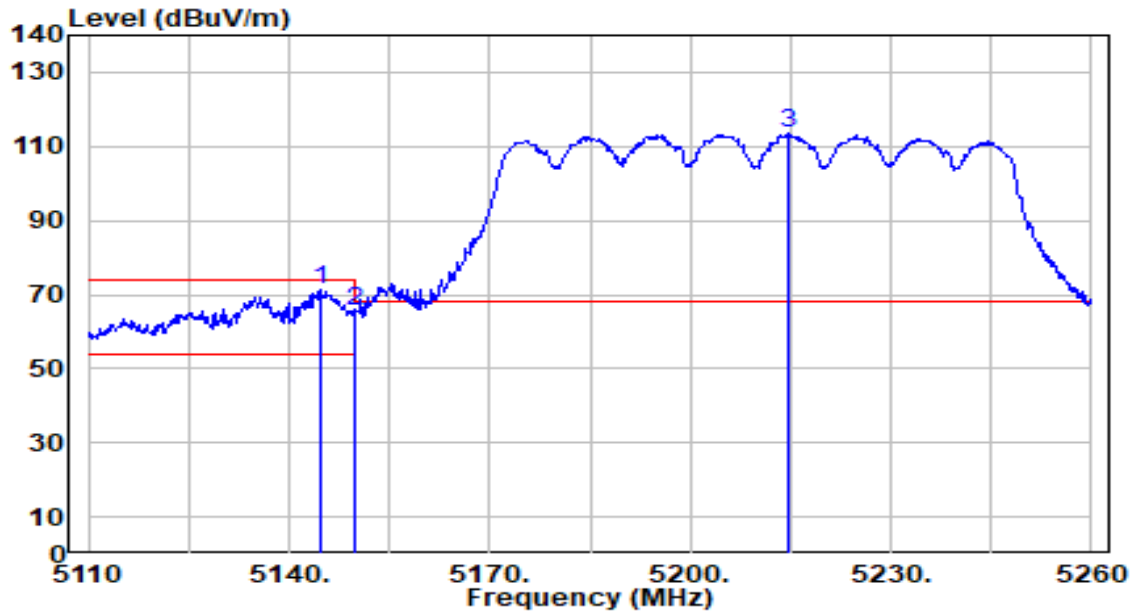


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.650	70.54	0.65	71.18	-2.82	74.00	170	171	Peak
2		5150.000	64.87	0.65	65.53	-8.47	74.00	170	171	Peak
3		5214.700	113.15	0.68	113.83	N/A	N/A	170	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

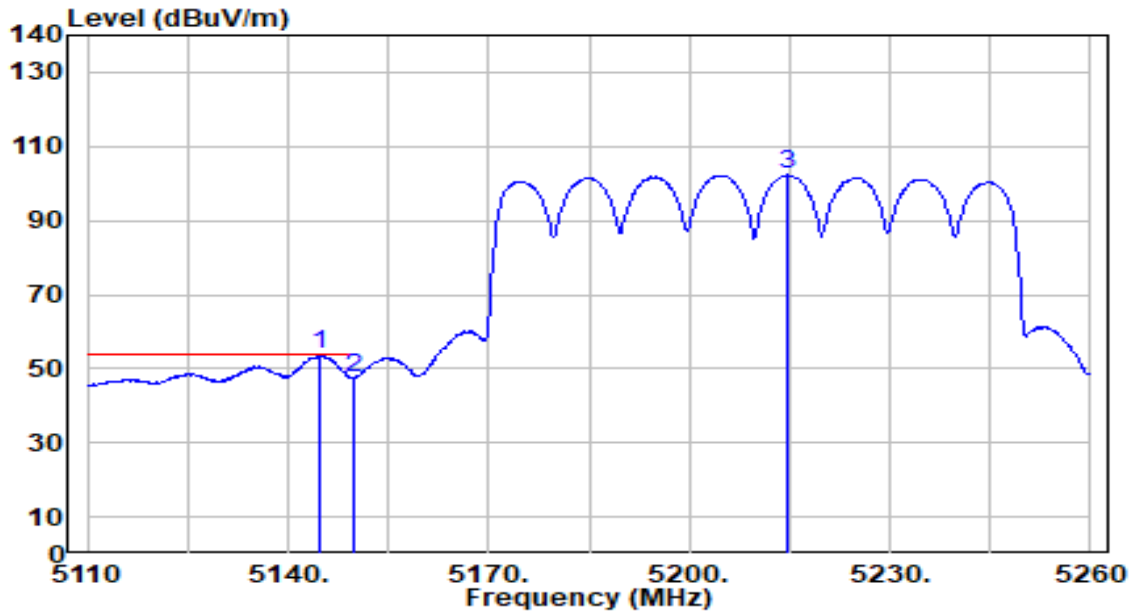


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.800	53.07	0.65	53.72	-0.28	54.00	170	171	Average
2		5150.000	47.02	0.65	47.67	-6.33	54.00	170	171	Average
3		5214.550	101.58	0.68	102.26	N/A	N/A	170	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

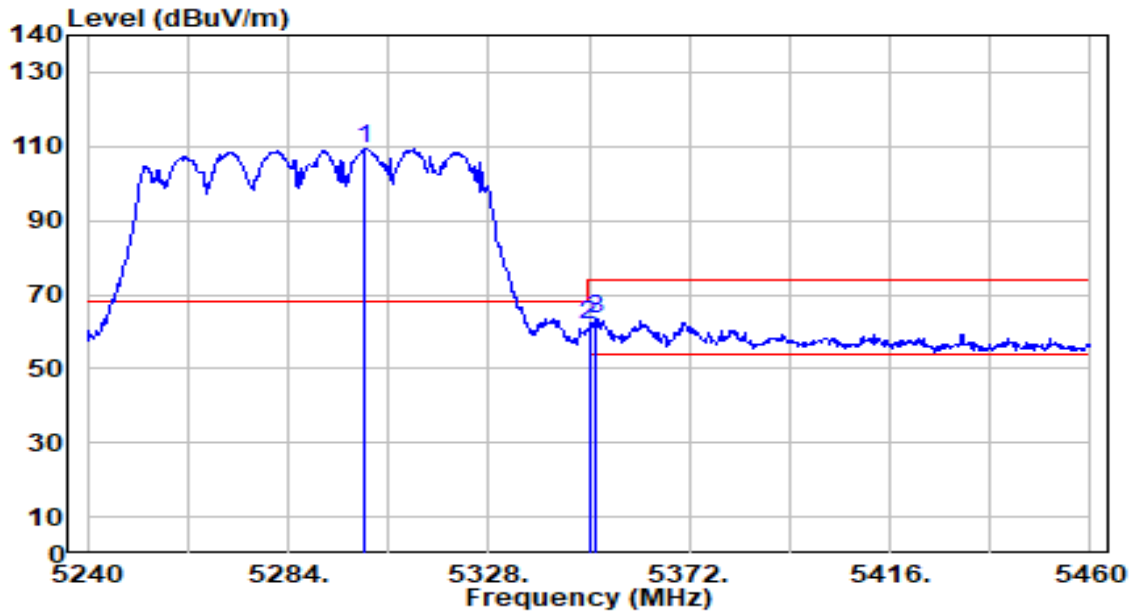


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.940	108.99	0.55	109.54	N/A	N/A	200	118	Peak
2	5350.000	61.15	0.47	61.62	-12.38	74.00	200	118	Peak
3	* 5351.320	62.82	0.47	63.29	-10.71	74.00	200	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

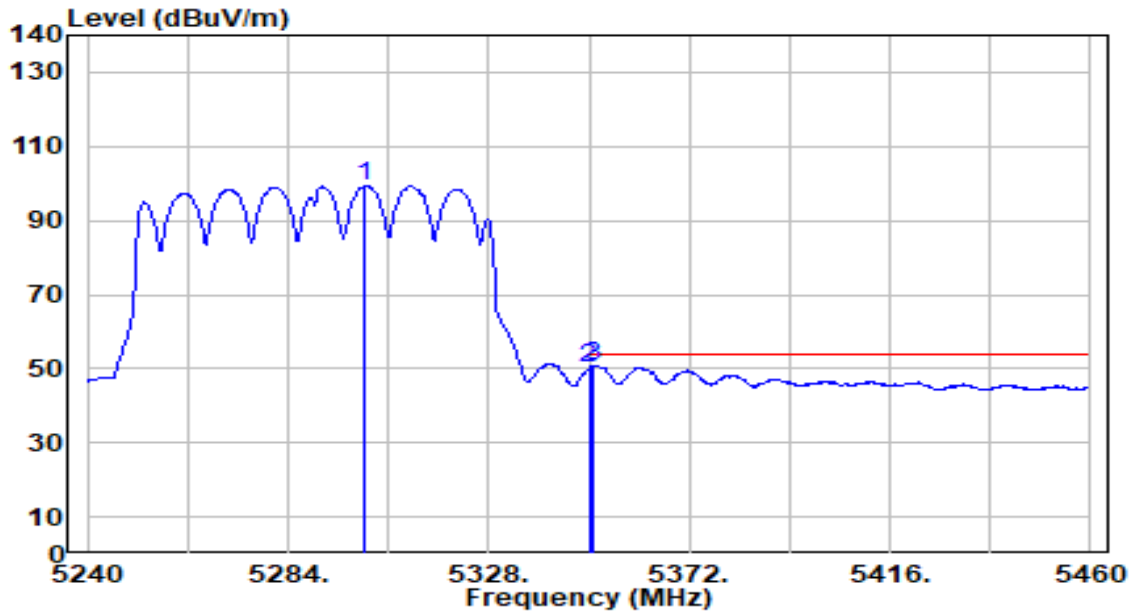


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.940	98.83	0.55	99.38	N/A	N/A	200	118	Average
2	5350.000	49.64	0.47	50.11	-3.89	54.00	200	118	Average
3	* 5351.100	50.40	0.47	50.87	-3.13	54.00	200	118	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

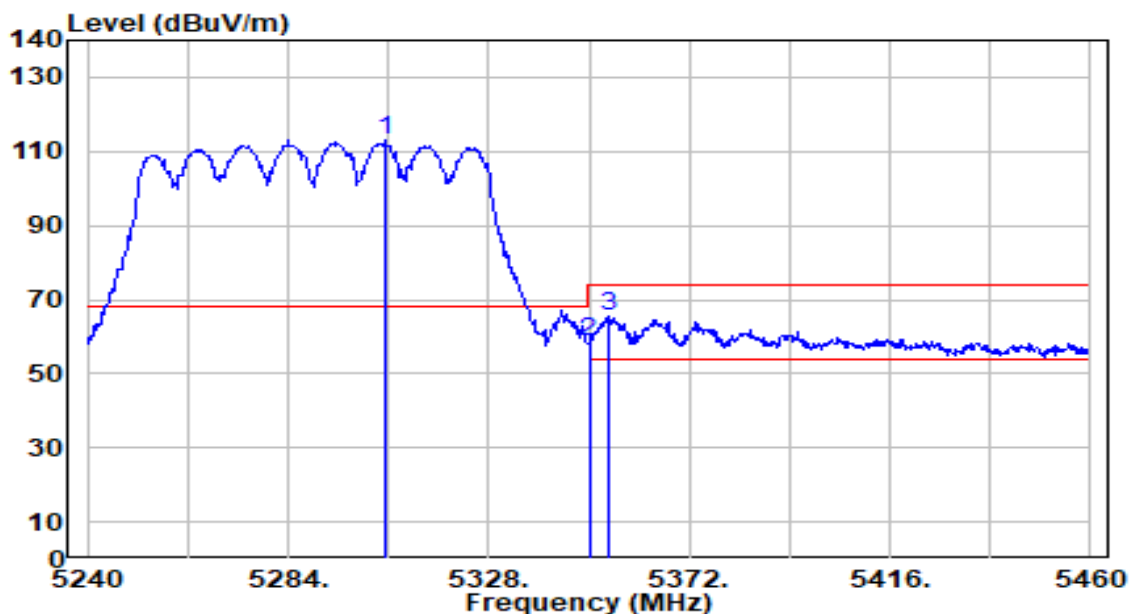


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5305.120	112.53	0.54	113.07	N/A	N/A	200	182	Peak
2	5350.000	58.42	0.47	58.89	-15.11	74.00	200	182	Peak
3	* 5354.180	65.00	0.46	65.47	-8.53	74.00	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

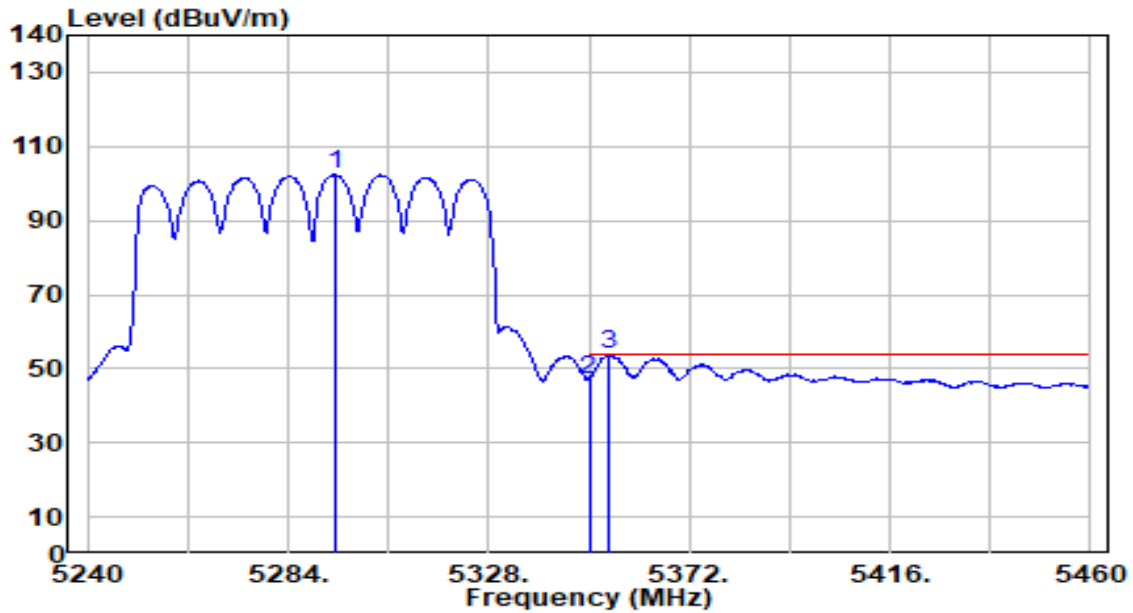


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.560	101.74	0.56	102.30	N/A	N/A	200	182	Average
2	5350.000	46.75	0.47	47.22	-6.78	54.00	200	182	Average
3	* 5354.180	53.26	0.46	53.72	-0.28	54.00	200	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

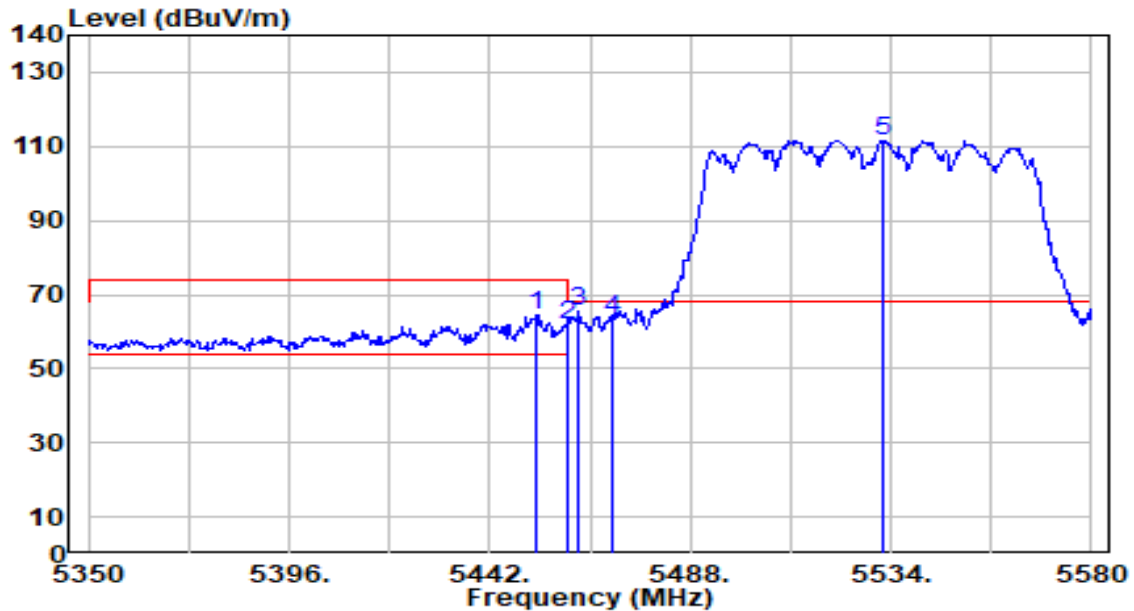


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.810	64.03	0.63	64.66	-9.34	74.00	200	118	Peak
2	5460.000	61.33	0.66	61.99	-12.01	74.00	200	118	Peak
3	* 5462.240	65.08	0.67	65.76	-2.44	68.20	200	118	Peak
4	5470.000	62.91	0.71	63.61	-4.59	68.20	200	118	Peak
5	5532.160	110.49	0.99	111.49	N/A	N/A	200	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

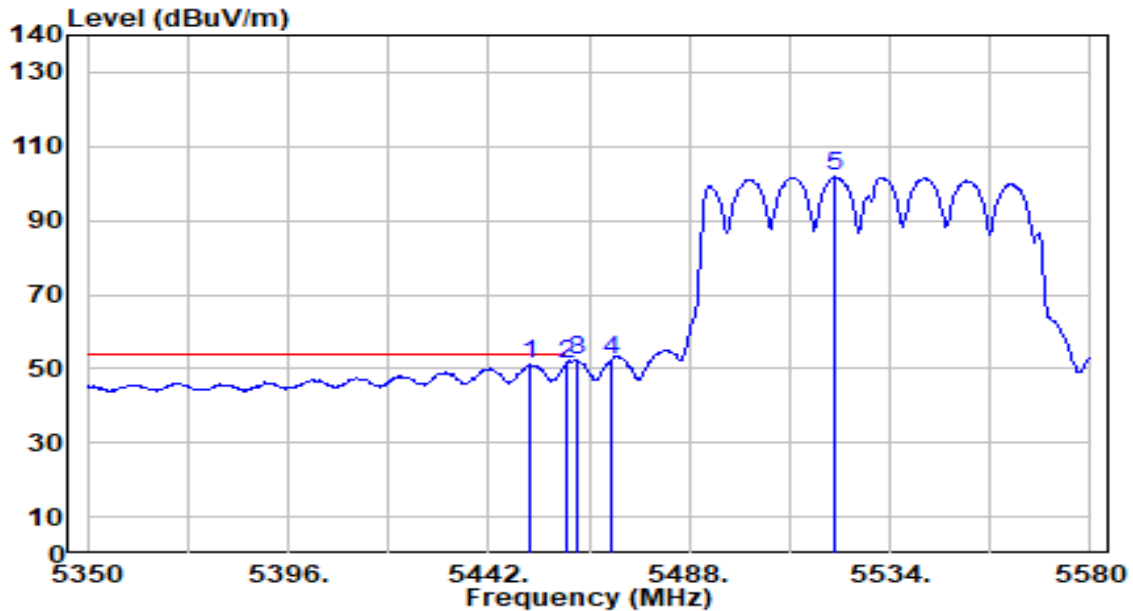


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5451.660	50.52	0.62	51.15	-2.85	54.00	200	118	Average
2	*	5460.000	50.69	0.66	51.35	-2.65	54.00	200	118	Average
3		5462.240	51.37	0.67	52.04	N/A	N/A	200	118	Average
4		5470.000	51.66	0.71	52.36	N/A	N/A	200	118	Average
5		5521.580	100.77	0.94	101.72	N/A	N/A	200	118	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

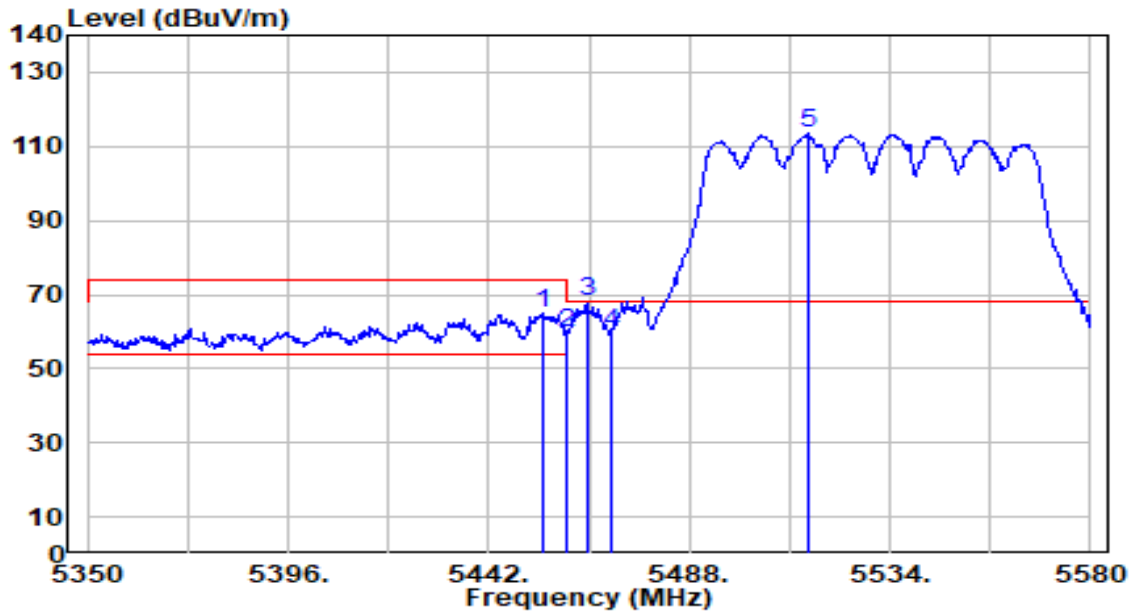


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.420	64.16	0.64	64.79	-9.21	74.00	200	182	Peak
2	5460.000	58.92	0.66	59.59	-14.41	74.00	200	182	Peak
3	* 5464.540	67.23	0.68	67.91	-0.29	68.20	200	182	Peak
4	5470.000	59.17	0.71	59.87	-8.33	68.20	200	182	Peak
5	5515.600	112.56	0.91	113.47	N/A	N/A	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

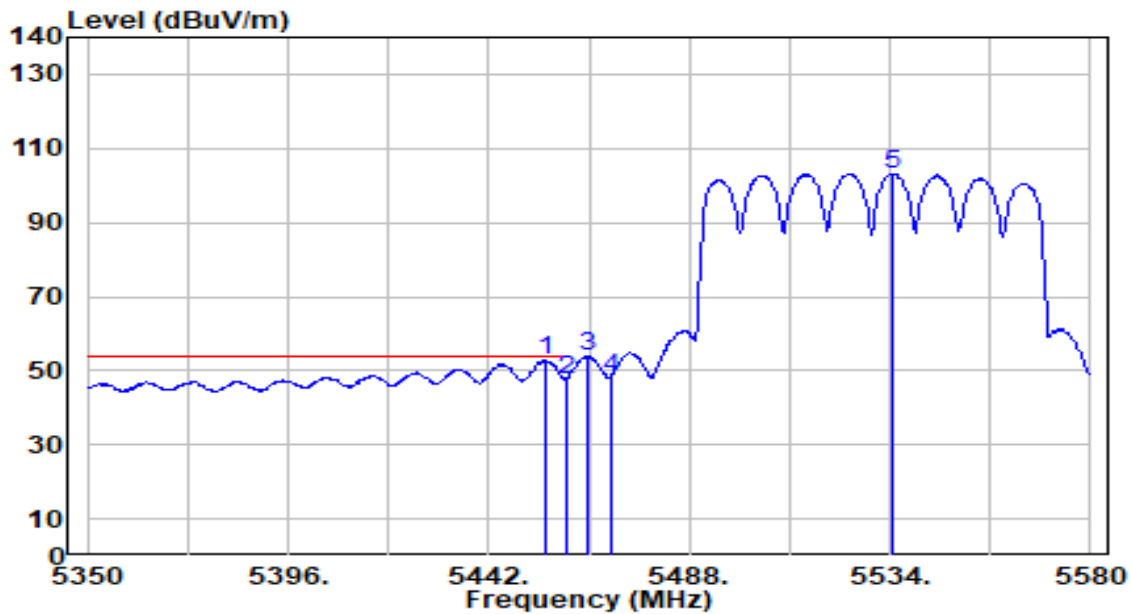


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.880	52.12	0.64	52.76	-1.24	54.00	200	182	Average
2		5460.000	47.14	0.66	47.80	-6.20	54.00	200	182	Average
3		5464.540	53.06	0.68	53.74	N/A	N/A	200	182	Average
4		5470.000	47.62	0.71	48.33	N/A	N/A	200	182	Average
5		5534.690	102.23	1.00	103.23	N/A	N/A	200	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

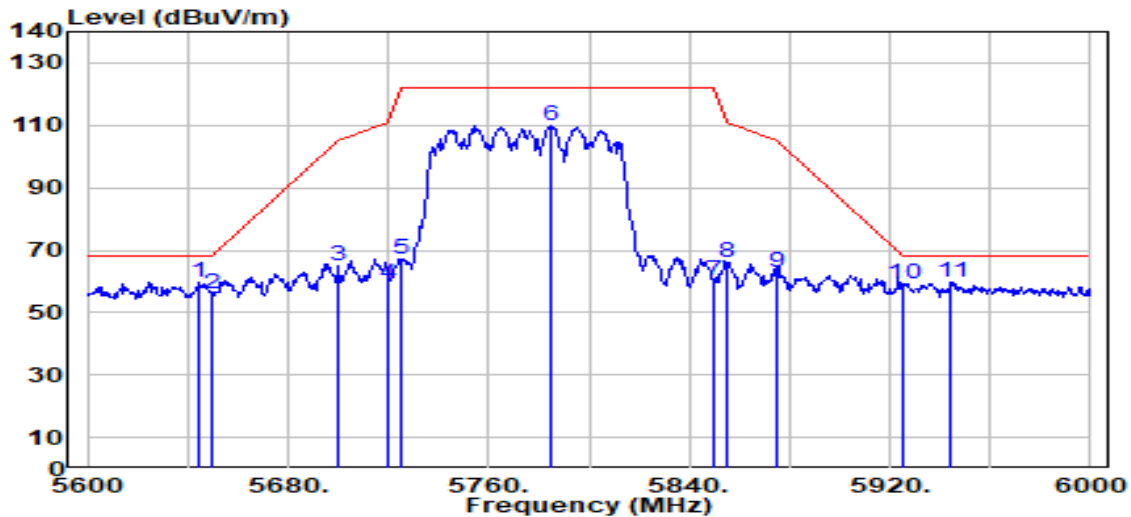


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.800	58.12	1.52	59.63	-8.57	68.20	200	181	Peak
2		5650.000	54.49	1.54	56.04	-12.16	68.20	200	181	Peak
3		5700.000	63.42	1.78	65.19	-40.01	105.20	200	181	Peak
4		5720.000	57.11	1.87	58.98	-51.82	110.80	200	181	Peak
5		5725.000	65.21	1.89	67.10	-55.10	122.20	200	181	Peak
6		5784.800	107.65	2.17	109.82	N/A	N/A	200	181	Peak
7		5850.000	58.20	2.25	60.46	-61.74	122.20	200	181	Peak
8		5855.000	63.60	2.25	65.85	-44.95	110.80	200	181	Peak
9		5875.000	60.72	2.26	62.97	-42.23	105.20	200	181	Peak
10		5925.000	56.78	2.27	59.04	-9.16	68.20	200	181	Peak
11		5944.400	57.31	2.27	59.58	-8.62	68.20	200	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

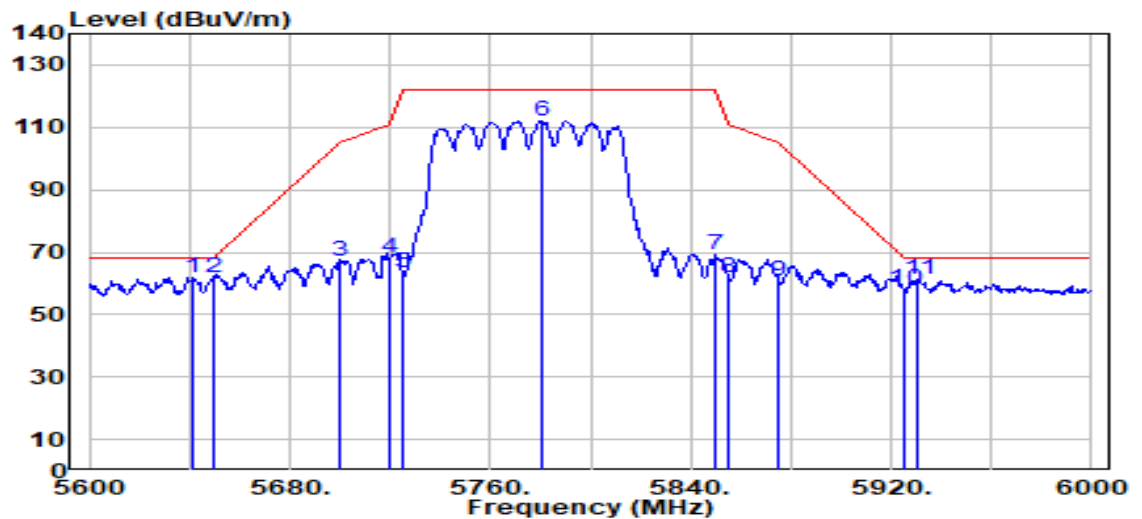


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5641.200	60.40	1.50	61.90	-6.30	68.20	200	173	Peak
2	* 5650.000	60.36	1.54	61.91	-6.29	68.20	200	173	Peak
3	5700.000	65.40	1.78	67.18	-38.02	105.20	200	173	Peak
4	5720.000	66.40	1.87	68.27	-42.53	110.80	200	173	Peak
5	5725.000	61.54	1.89	63.44	-58.76	122.20	200	173	Peak
6	5780.800	109.99	2.15	112.15	N/A	N/A	200	173	Peak
7	5850.000	66.87	2.25	69.12	-53.08	122.20	200	173	Peak
8	5855.000	59.65	2.25	61.90	-48.90	110.80	200	173	Peak
9	5875.000	58.55	2.26	60.81	-44.39	105.20	200	173	Peak
10	5925.000	55.85	2.27	58.12	-10.08	68.20	200	173	Peak
11	5930.800	58.90	2.27	61.17	-7.03	68.20	200	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

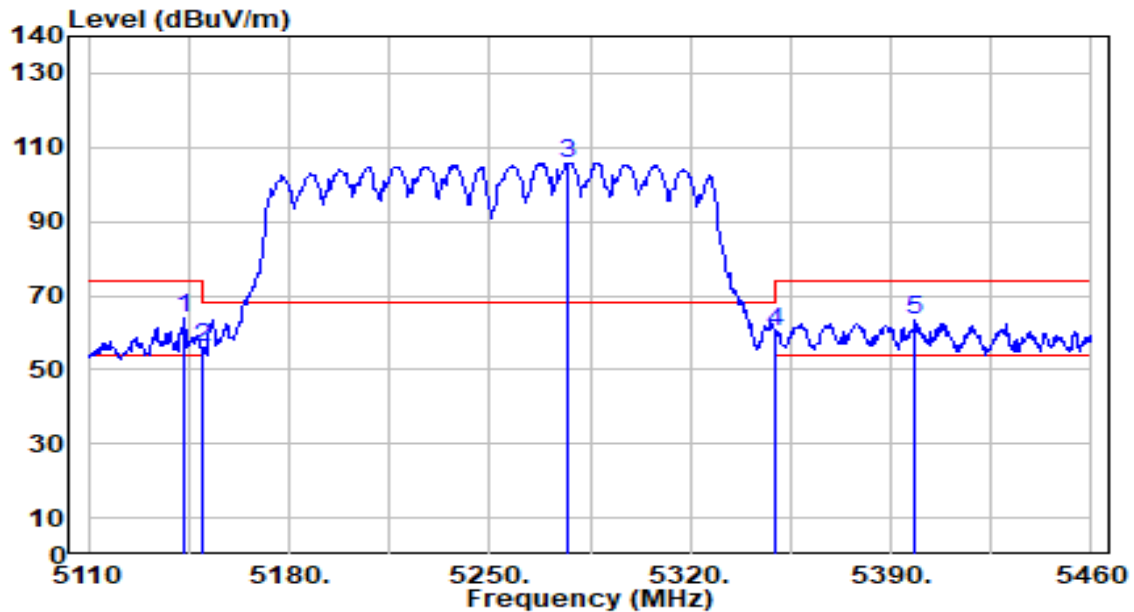


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.250	63.22	0.65	63.87	-10.13	74.00	199	242	Peak
2		5150.000	55.40	0.65	56.05	-17.95	74.00	199	242	Peak
3		5277.650	105.30	0.58	105.88	N/A	N/A	199	242	Peak
4		5350.000	59.81	0.47	60.28	-13.72	74.00	199	242	Peak
5		5398.400	63.02	0.40	63.42	-10.58	74.00	199	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

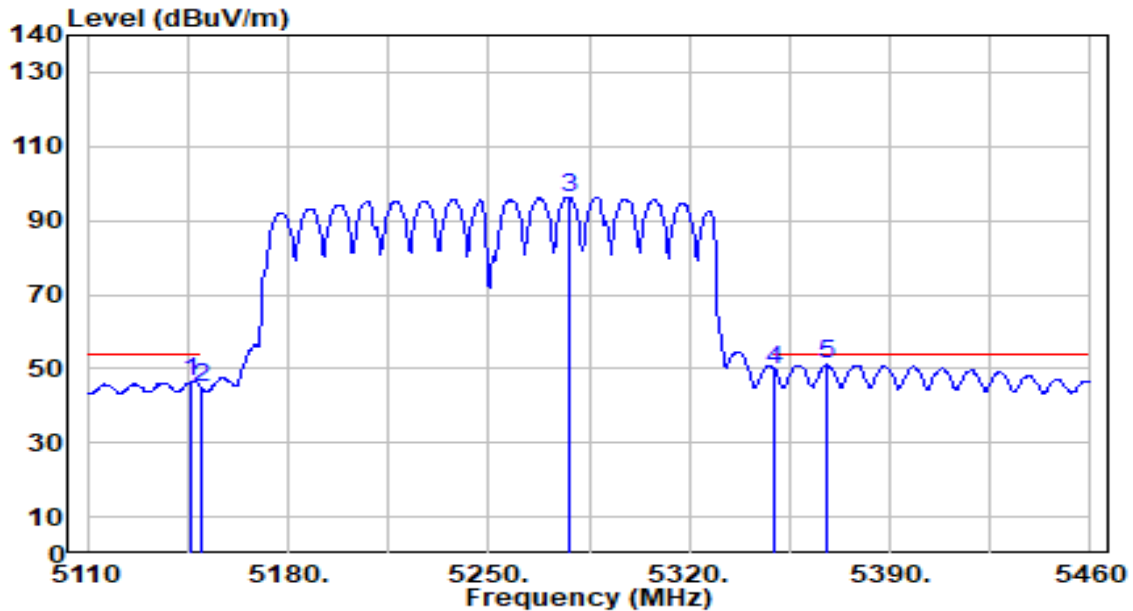


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.050	45.99	0.65	46.64	-7.36	54.00	199	242	Average
2	5150.000	44.24	0.65	44.89	-9.11	54.00	199	242	Average
3	5278.000	95.72	0.58	96.30	N/A	N/A	199	242	Average
4	5350.000	49.04	0.47	49.51	-4.49	54.00	199	242	Average
5	* 5367.600	50.58	0.44	51.03	-2.97	54.00	199	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

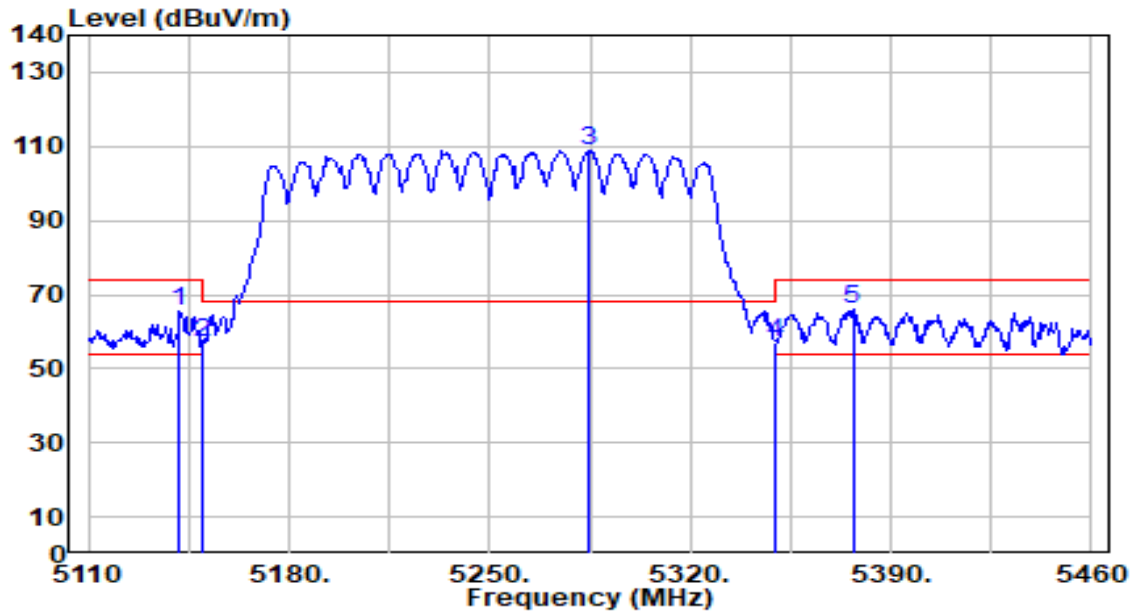


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5141.850	64.69	0.65	65.33	-8.67	74.00	170	171	Peak
2	5150.000	56.63	0.65	57.28	-16.72	74.00	170	171	Peak
3	5284.650	108.26	0.57	108.83	N/A	N/A	170	171	Peak
4	5350.000	56.60	0.47	57.07	-16.93	74.00	170	171	Peak
5	* 5376.700	65.63	0.43	66.06	-7.94	74.00	170	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

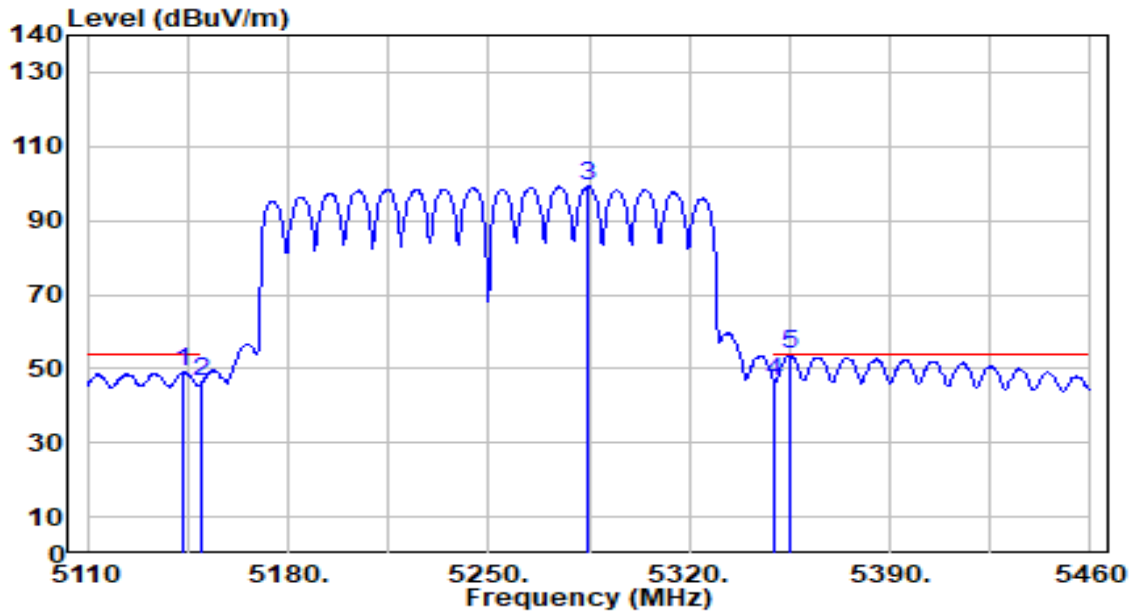


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.600	48.40	0.65	49.04	-4.96	54.00	170	171	Average
2	5150.000	45.71	0.65	46.37	-7.63	54.00	170	171	Average
3	5284.650	98.79	0.57	99.36	N/A	N/A	170	171	Average
4	5350.000	45.84	0.47	46.31	-7.69	54.00	170	171	Average
5	* 5355.000	53.33	0.46	53.79	-0.21	54.00	170	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

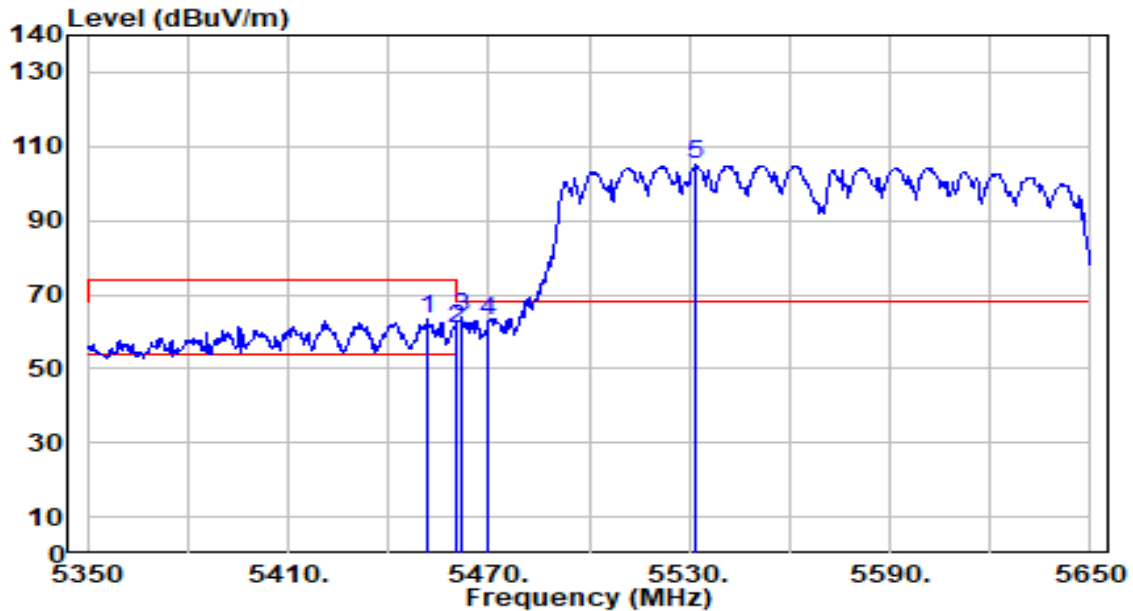


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.700	62.54	0.62	63.16	-10.84	74.00	200	130	Peak
2	5460.000	59.91	0.66	60.57	-13.43	74.00	200	130	Peak
3	* 5461.900	63.27	0.67	63.94	-4.26	68.20	200	130	Peak
4	5470.000	61.91	0.71	62.61	-5.59	68.20	200	130	Peak
5	5532.100	104.15	0.99	105.14	N/A	N/A	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

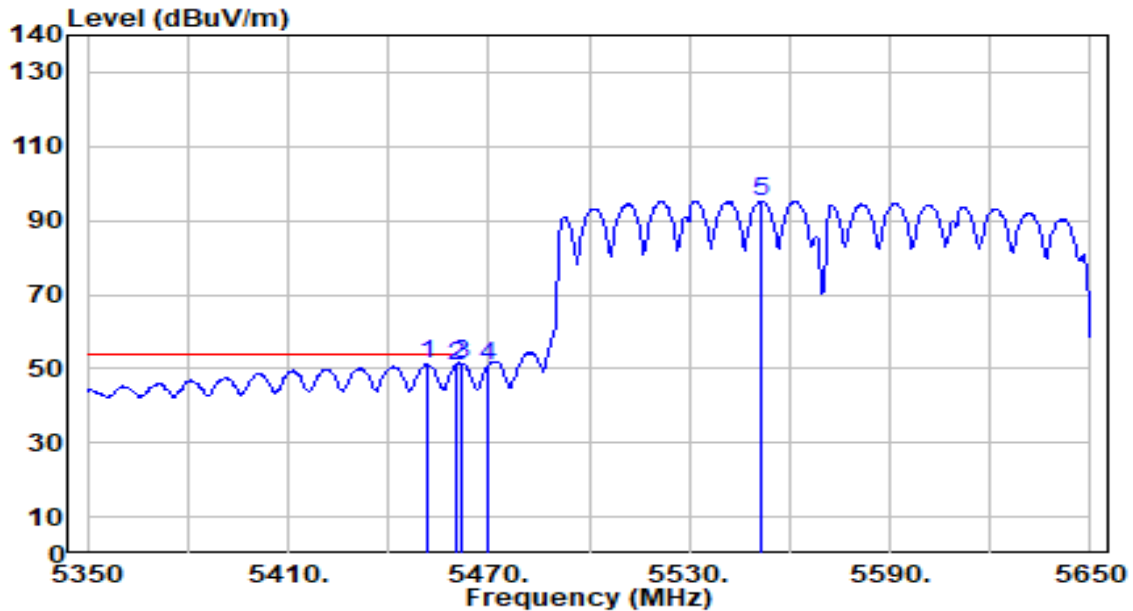


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.000	50.49	0.63	51.12	-2.88	54.00	200	130	Average
2		5460.000	50.17	0.66	50.83	-3.17	54.00	200	130	Average
3		5461.900	50.62	0.67	51.29	N/A	N/A	200	130	Average
4		5470.000	50.25	0.71	50.96	N/A	N/A	200	130	Average
5		5551.600	94.23	1.08	95.31	N/A	N/A	200	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

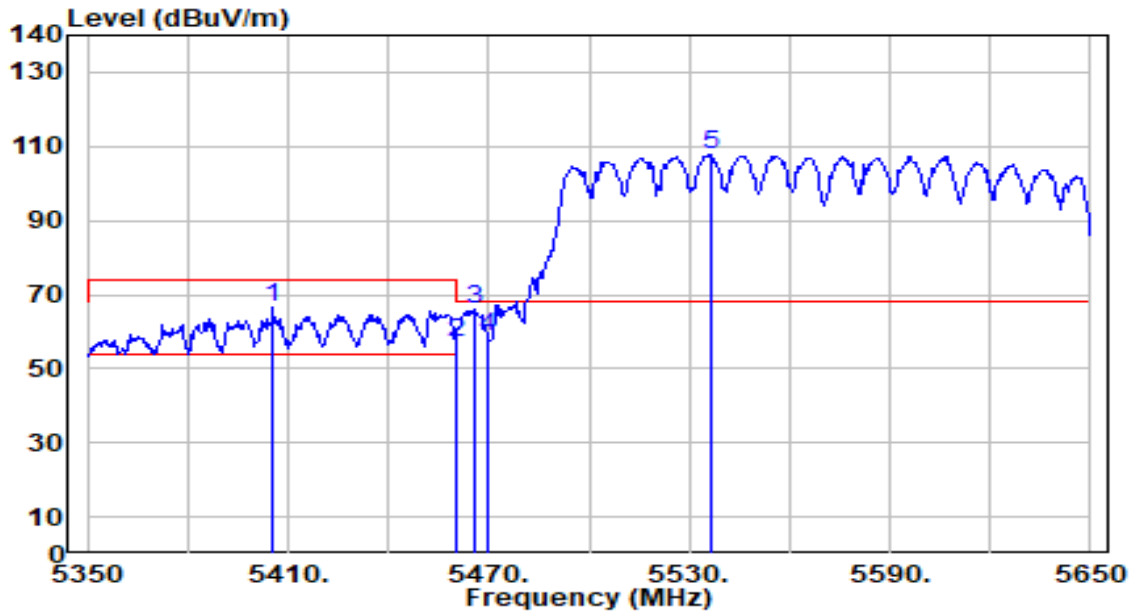


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5405.500	66.35	0.42	66.77	-7.23	74.00	200	164	Peak
2	5460.000	56.51	0.66	57.17	-16.83	74.00	200	164	Peak
3	* 5465.800	65.61	0.69	66.30	-1.90	68.20	200	164	Peak
4	5470.000	57.95	0.71	58.65	-9.55	68.20	200	164	Peak
5	5536.300	106.66	1.01	107.67	N/A	N/A	200	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-12
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

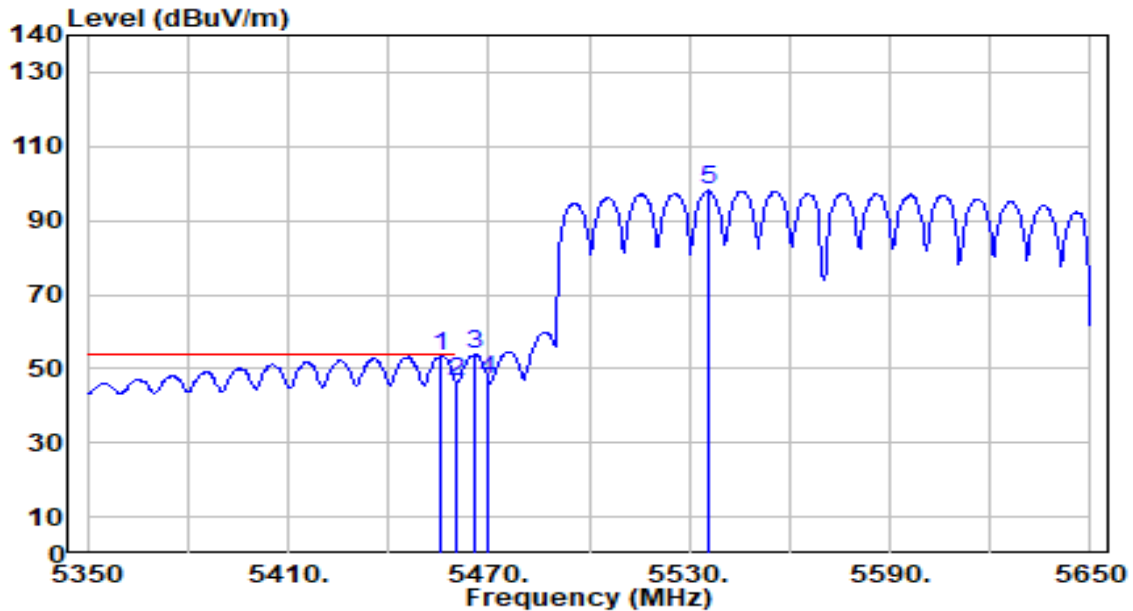


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.900	52.88	0.64	53.52	-0.48	54.00	200	164	Average
2		5460.000	45.79	0.66	46.45	-7.55	54.00	200	164	Average
3		5465.800	53.07	0.69	53.75	N/A	N/A	200	164	Average
4		5470.000	46.06	0.71	46.76	N/A	N/A	200	164	Average
5		5535.700	97.10	1.01	98.10	N/A	N/A	200	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

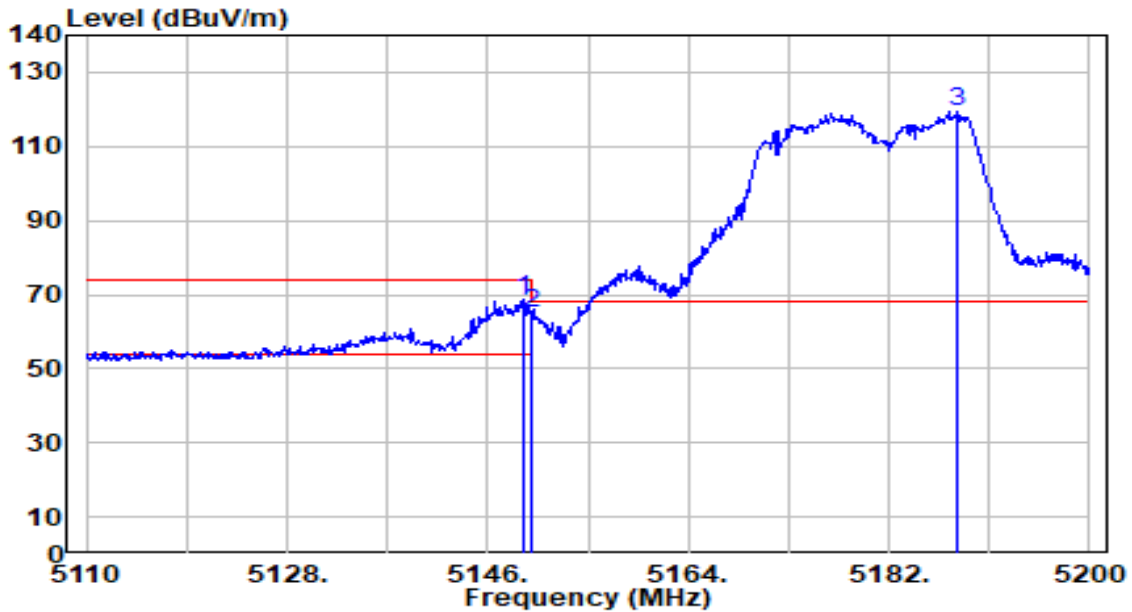


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.240	68.16	0.65	68.81	-5.19	74.00	199	242	Peak
2		5150.000	64.13	0.65	64.78	-9.22	74.00	199	242	Peak
3		5188.210	118.77	0.69	119.46	N/A	N/A	199	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

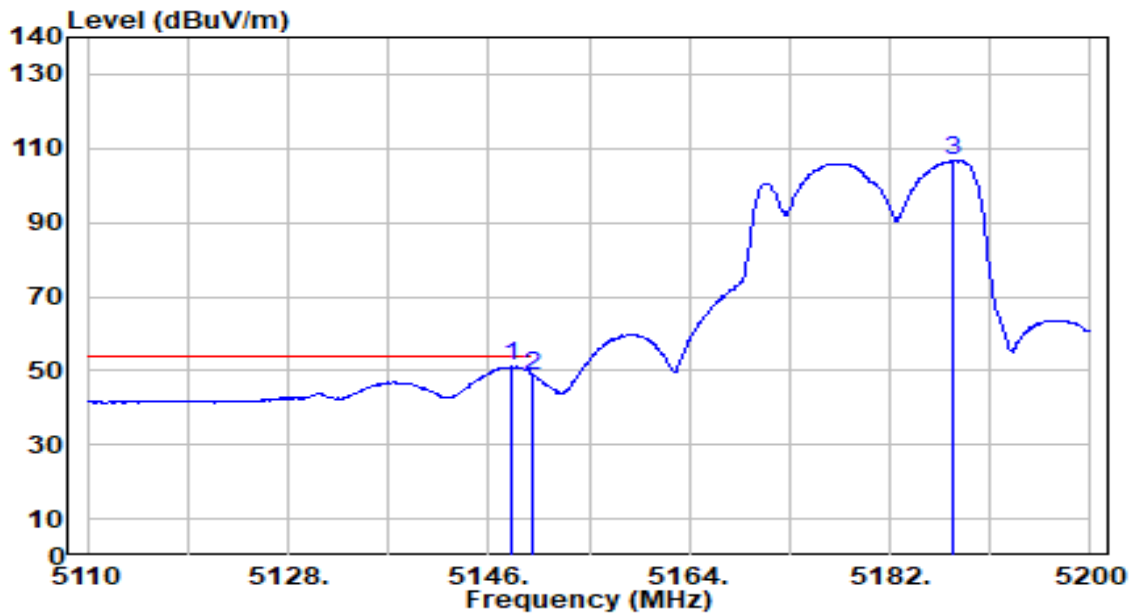


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.070	50.42	0.65	51.07	-2.93	54.00	199	242	Average
2		5150.000	48.07	0.65	48.72	-5.28	54.00	199	242	Average
3		5187.670	105.97	0.69	106.66	N/A	N/A	199	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

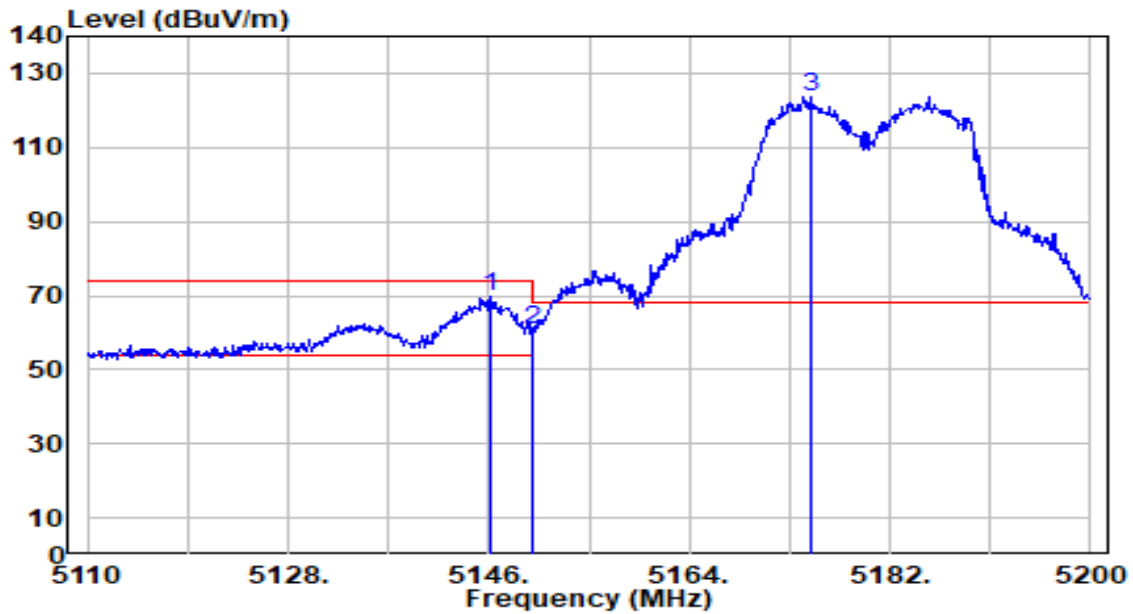


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.090	69.10	0.65	69.75	-4.25	74.00	170	171	Peak
2		5150.000	59.94	0.65	60.60	-13.40	74.00	170	171	Peak
3		5174.980	123.09	0.68	123.77	N/A	N/A	170	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

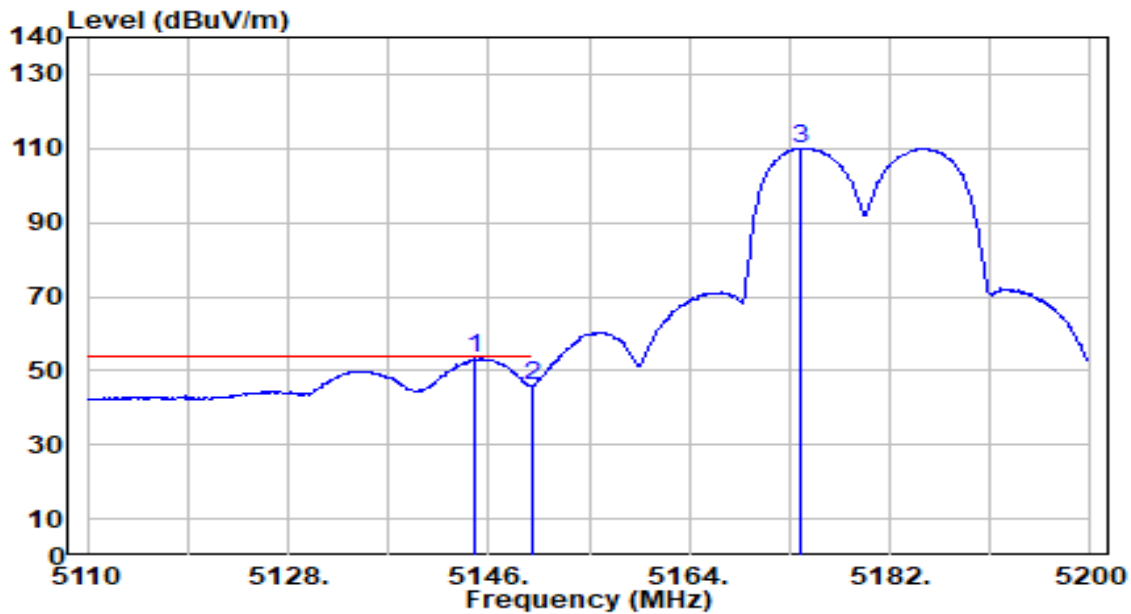


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.830	52.47	0.65	53.12	-0.88	54.00	170	171	Average
2		5150.000	45.55	0.65	46.21	-7.79	54.00	170	171	Average
3		5173.900	109.36	0.68	110.04	N/A	N/A	170	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

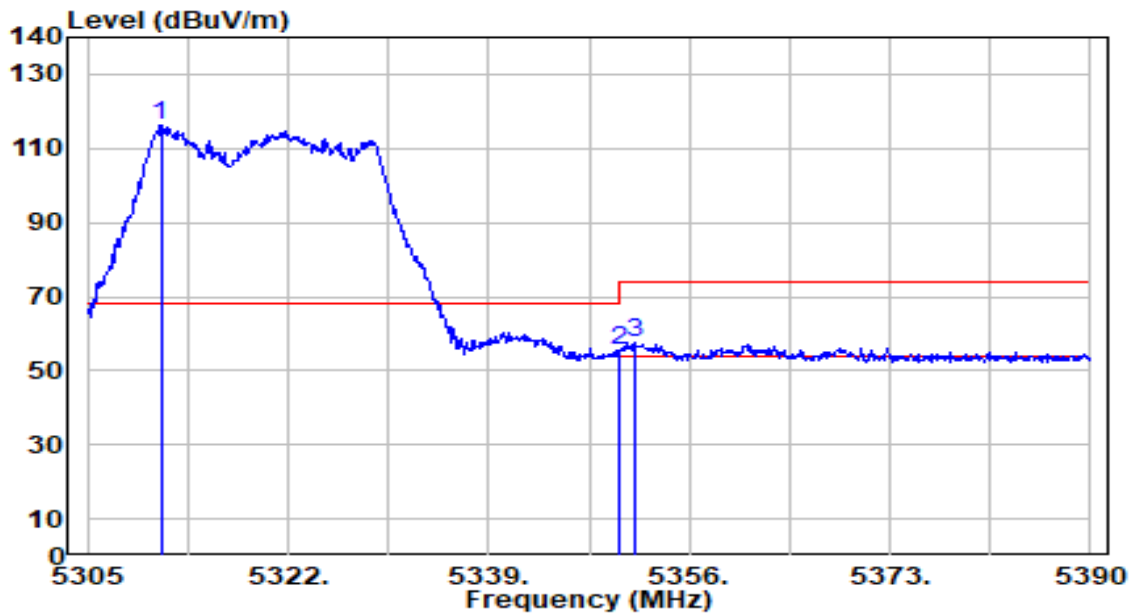


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.205	115.73	0.53	116.26	N/A	N/A	200	118	Peak
2	5350.000	54.78	0.47	55.25	-18.75	74.00	200	118	Peak
3	* 5351.495	57.31	0.47	57.78	-16.22	74.00	200	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

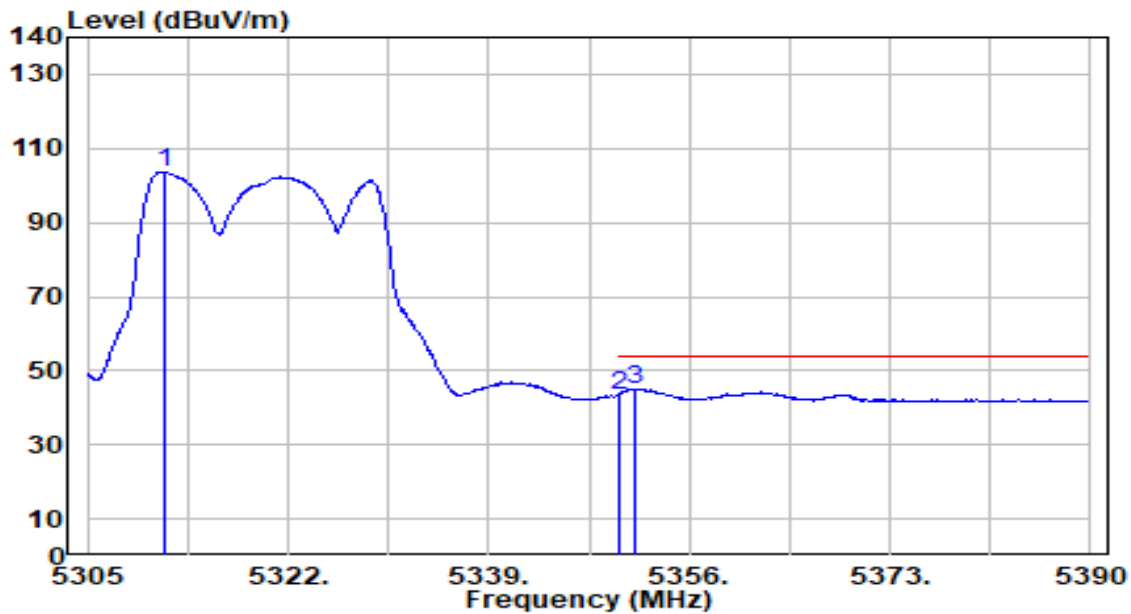


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.545	102.98	0.53	103.51	N/A	N/A	200	118	Average
2	5350.000	42.76	0.47	43.23	-10.77	54.00	200	118	Average
3	* 5351.325	44.64	0.47	45.11	-8.89	54.00	200	118	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

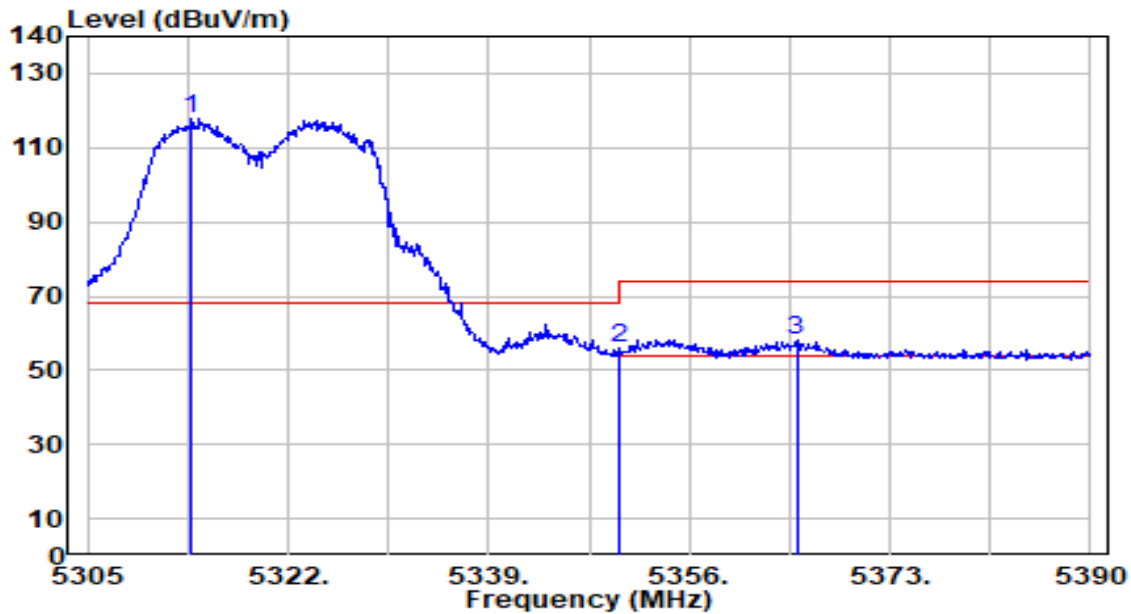


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.840	117.17	0.53	117.69	N/A	N/A	200	182	Peak
2	5350.000	55.32	0.47	55.80	-18.20	74.00	200	182	Peak
3	* 5365.095	57.67	0.45	58.11	-15.89	74.00	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

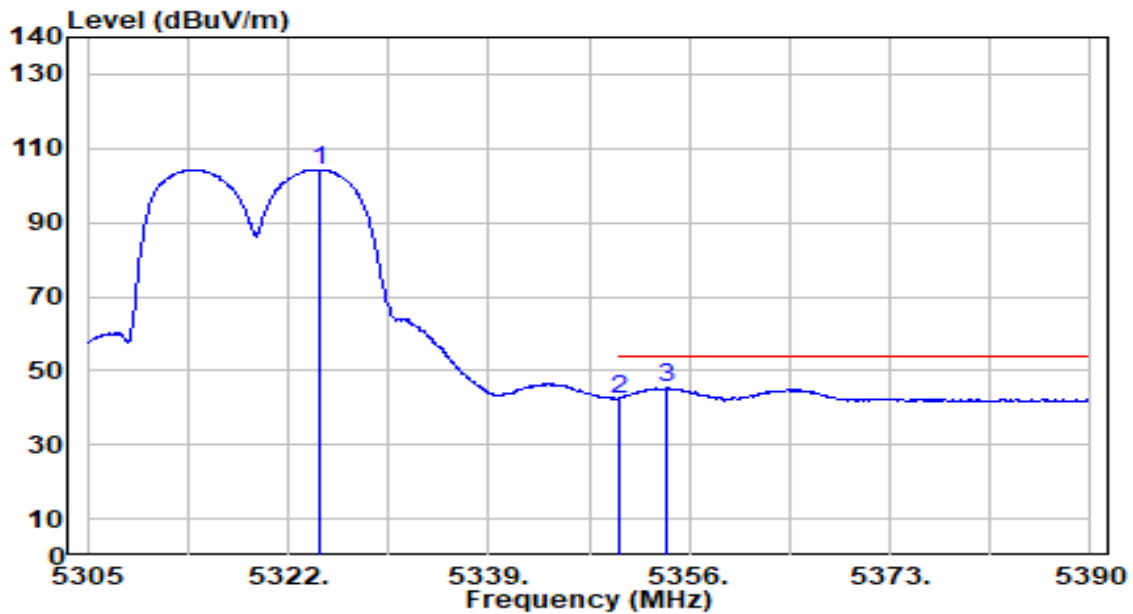


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.635	103.82	0.51	104.33	N/A	N/A	200	182	Average
2	5350.000	41.91	0.47	42.38	-11.62	54.00	200	182	Average
3	* 5354.045	44.84	0.46	45.31	-8.69	54.00	200	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

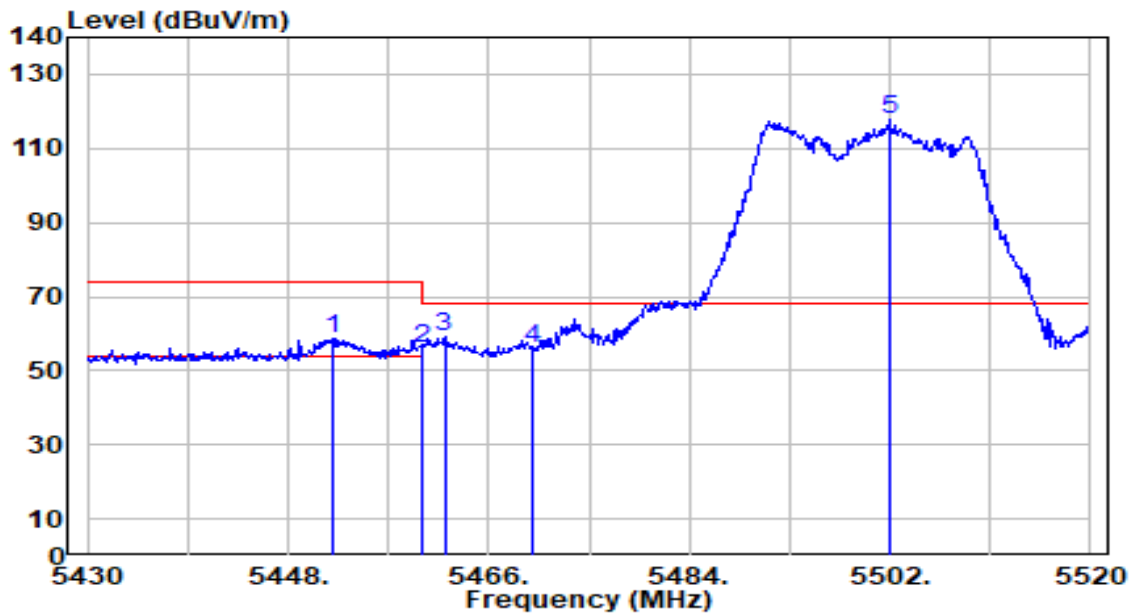


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5452.050	58.26	0.63	58.88	-15.12	74.00	200	130	Peak
2		5460.000	55.51	0.66	56.17	-17.83	74.00	200	130	Peak
3	*	5462.040	58.36	0.67	59.03	-9.17	68.20	200	130	Peak
4		5470.000	55.12	0.71	55.83	-12.37	68.20	200	130	Peak
5		5501.910	116.80	0.85	117.65	N/A	N/A	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

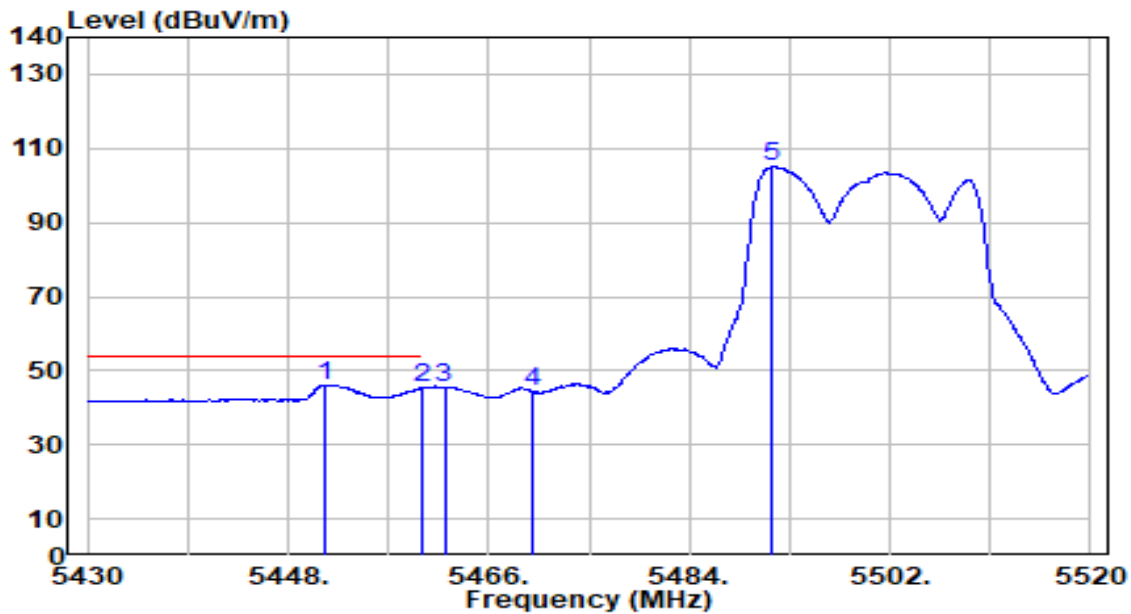


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.420	45.58	0.62	46.21	-7.79	54.00	200	130	Average
2		5460.000	44.58	0.66	45.24	-8.76	54.00	200	130	Average
3		5462.040	44.77	0.67	45.45	N/A	N/A	200	130	Average
4		5470.000	43.46	0.71	44.16	N/A	N/A	200	130	Average
5		5491.470	104.14	0.80	104.94	N/A	N/A	200	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

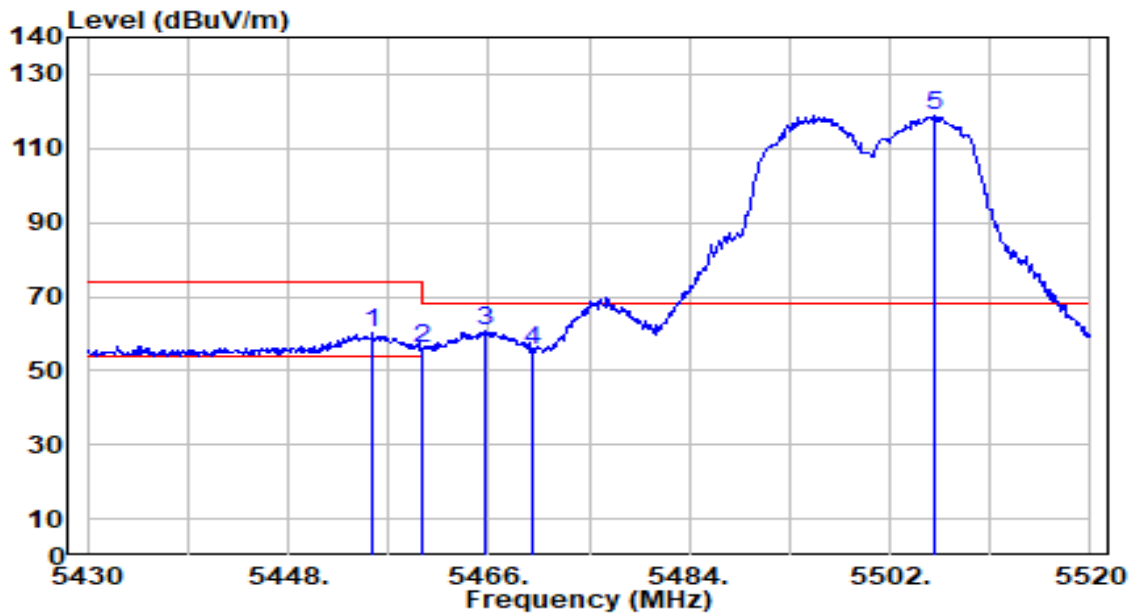


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.650	59.37	0.64	60.01	-13.99	74.00	200	164	Peak
2	5460.000	55.49	0.66	56.15	-17.85	74.00	200	164	Peak
3	* 5465.640	59.89	0.69	60.58	-7.62	68.20	200	164	Peak
4	5470.000	54.86	0.71	55.57	-12.63	68.20	200	164	Peak
5	5505.960	118.21	0.87	119.08	N/A	N/A	200	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

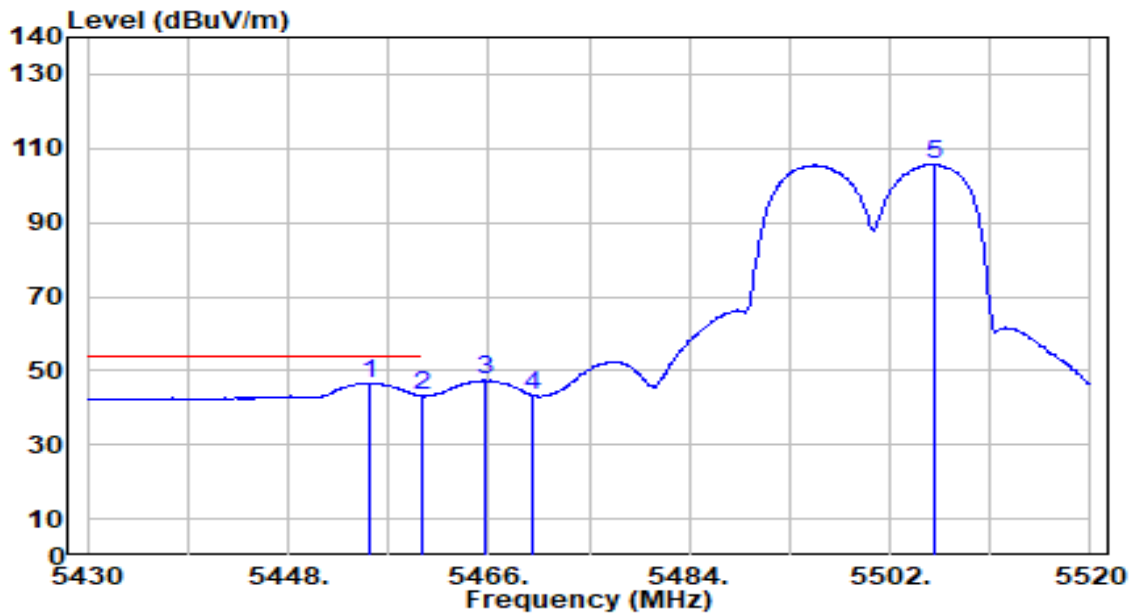


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.380	46.09	0.64	46.73	-7.27	54.00	200	164	Average
2		5460.000	42.70	0.66	43.36	-10.64	54.00	200	164	Average
3		5465.640	46.64	0.69	47.33	N/A	N/A	200	164	Average
4		5470.000	42.49	0.71	43.20	N/A	N/A	200	164	Average
5		5505.960	104.84	0.87	105.71	N/A	N/A	200	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

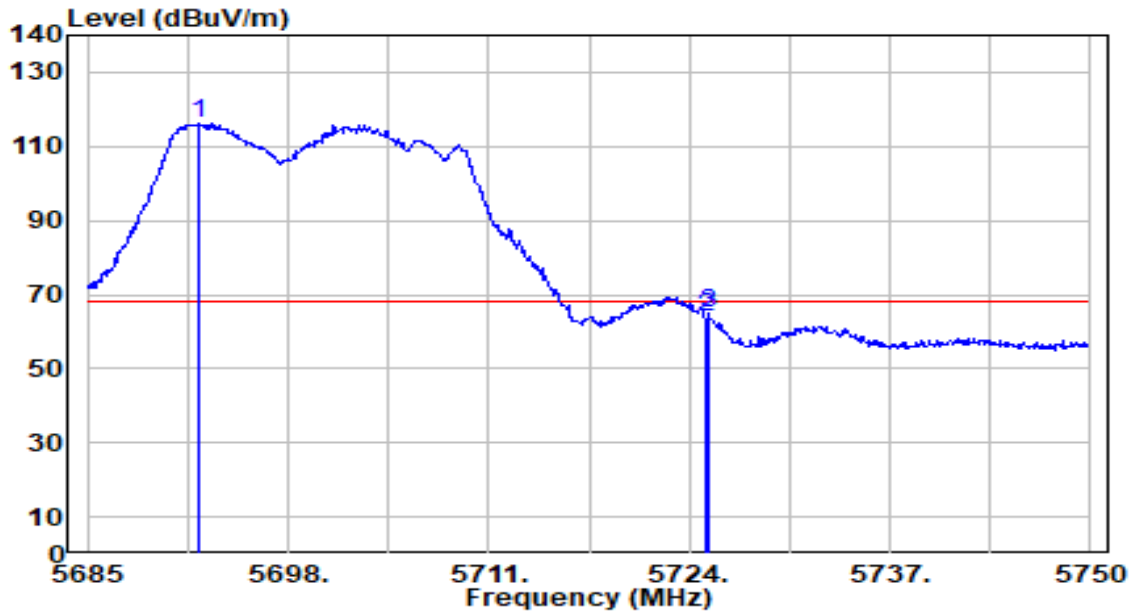


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5692.150	114.26	1.74	116.00	N/A	N/A	200	118	Peak
2	5725.000	61.96	1.89	63.86	-4.34	68.20	200	118	Peak
3	* 5725.235	63.26	1.89	65.15	-3.05	68.20	200	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

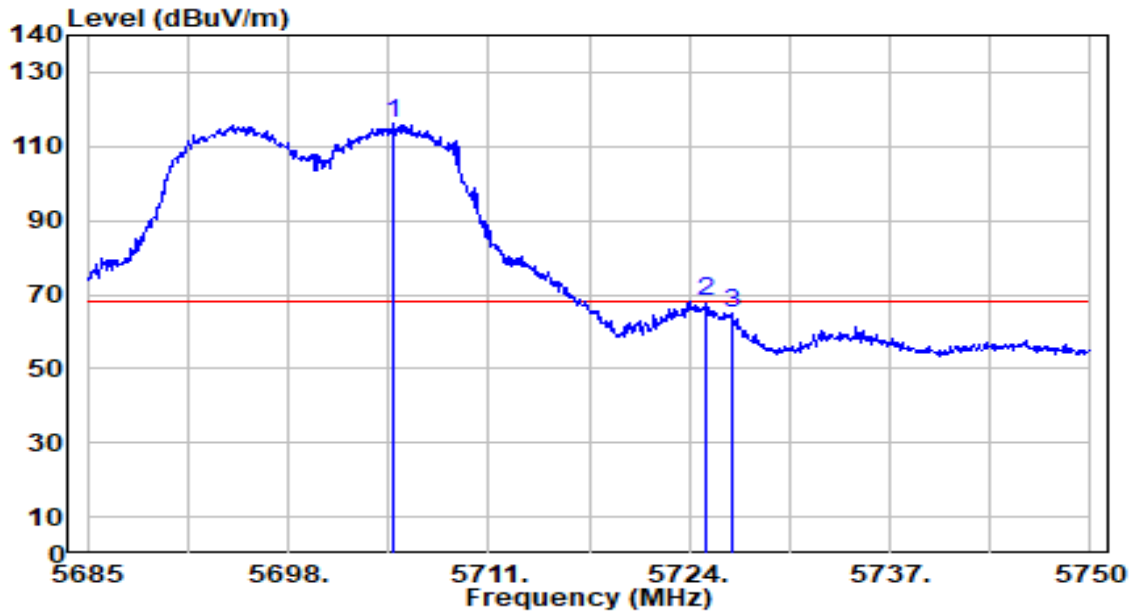


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5704.825	114.24	1.80	116.04	N/A	N/A	200	182	Peak
2	* 5725.000	66.07	1.89	67.96	-0.24	68.20	200	182	Peak
3	5726.730	63.33	1.90	65.23	-2.97	68.20	200	182	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

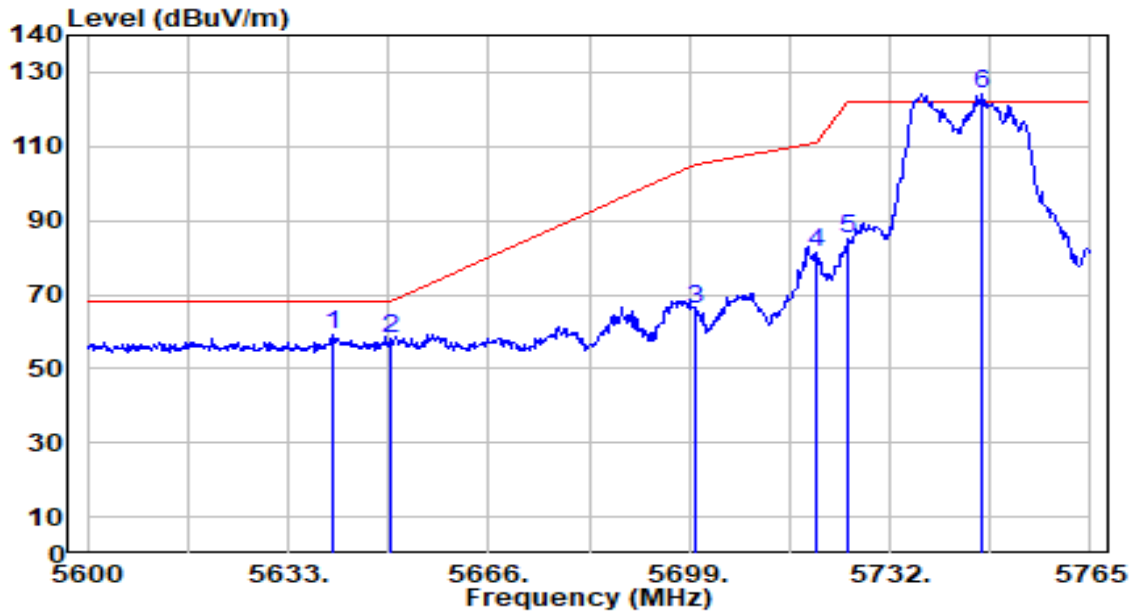


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5640.260	57.69	1.50	59.19	-9.01	68.20	200	119	Peak
2		5650.000	56.38	1.54	57.92	-10.28	68.20	200	119	Peak
3		5700.000	64.50	1.78	66.28	-38.92	105.20	200	119	Peak
4		5720.000	79.28	1.87	81.15	-29.65	110.80	200	119	Peak
5		5725.000	83.08	1.89	84.97	-37.23	122.20	200	119	Peak
6		5747.180	122.20	2.00	124.19	N/A	N/A	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

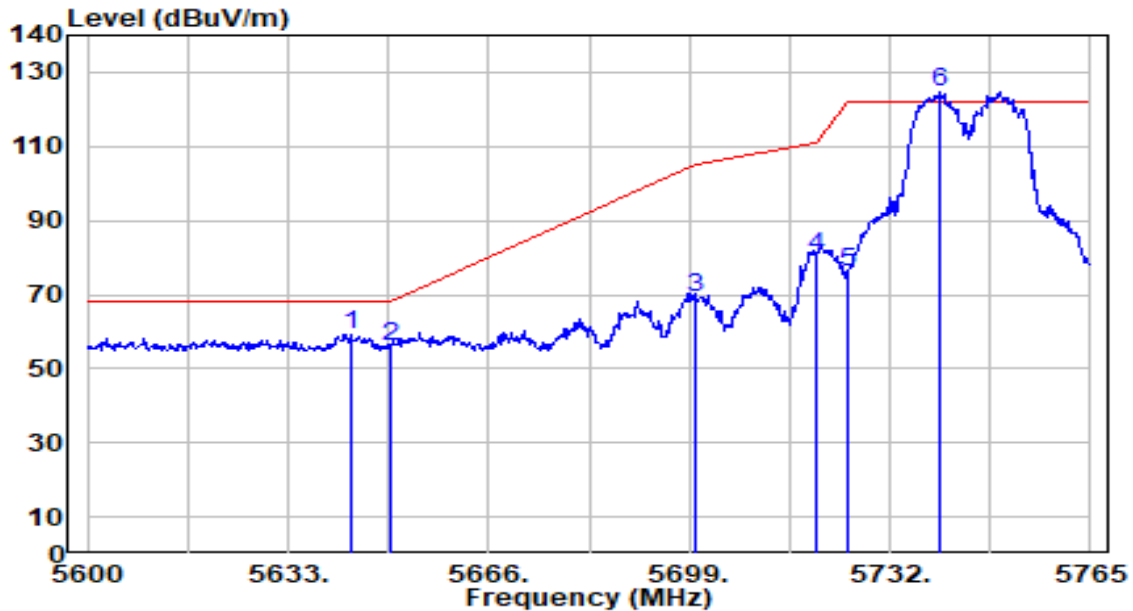


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.230	57.85	1.51	59.36	-8.84	68.20	200	183	Peak
2		5650.000	54.38	1.54	55.92	-12.28	68.20	200	183	Peak
3		5700.000	67.43	1.78	69.21	-35.99	105.20	200	183	Peak
4		5720.000	78.59	1.87	80.46	-30.34	110.80	200	183	Peak
5		5725.000	73.99	1.89	75.88	-46.32	122.20	200	183	Peak
6		5740.250	122.75	1.96	124.72	N/A	N/A	200	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

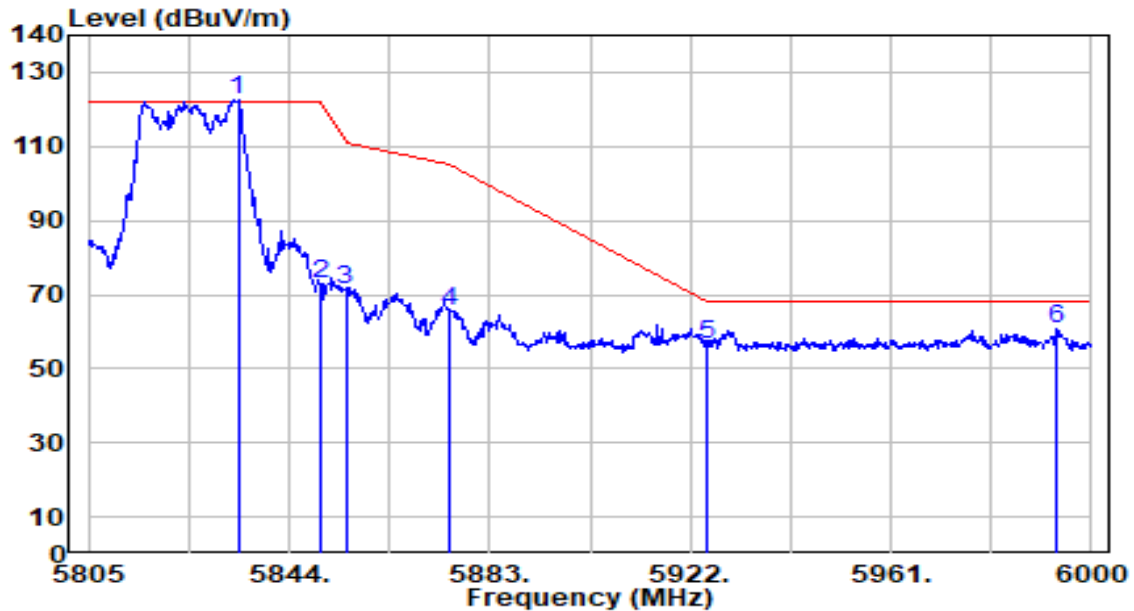


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5834.055	120.52	2.25	122.77	N/A	N/A	200	181	Peak
2	5850.000	70.65	2.25	72.90	-49.30	122.20	200	181	Peak
3	5855.000	69.27	2.25	71.52	-39.28	110.80	200	181	Peak
4	5875.000	63.29	2.26	65.54	-39.66	105.20	200	181	Peak
5	5925.000	54.50	2.27	56.76	-11.44	68.20	200	181	Peak
6	* 5992.980	58.25	2.28	60.53	-7.67	68.20	200	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

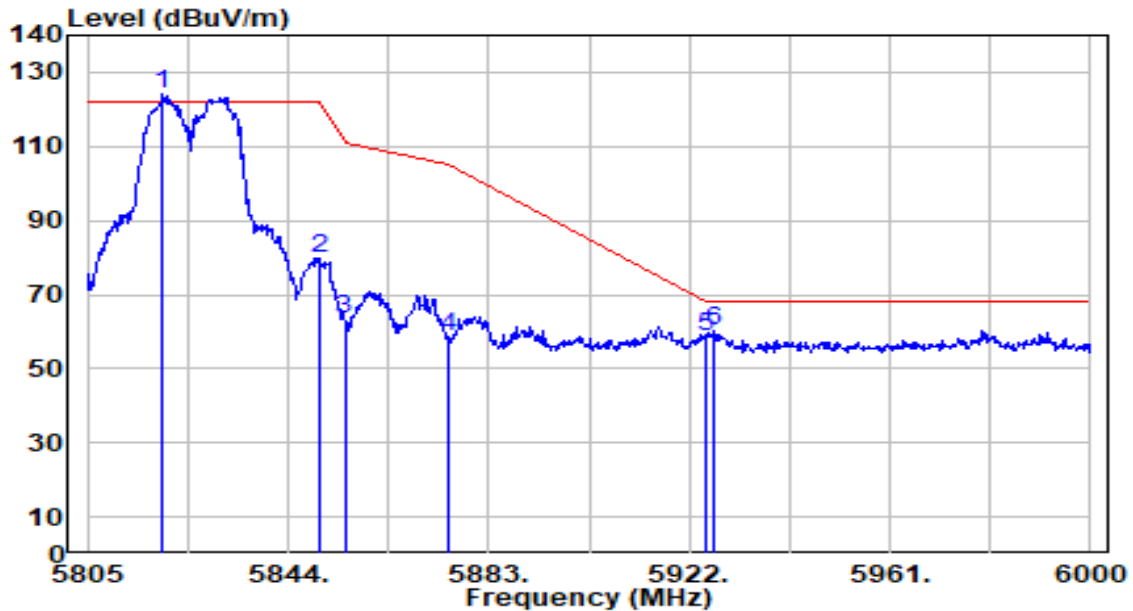


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.430	121.80	2.25	124.04	N/A	N/A	200	173	Peak
2	5850.000	77.57	2.25	79.82	-42.38	122.20	200	173	Peak
3	5855.000	61.11	2.25	63.37	-47.43	110.80	200	173	Peak
4	5875.000	56.48	2.26	58.74	-46.46	105.20	200	173	Peak
5	5925.000	56.23	2.27	58.50	-9.70	68.20	200	173	Peak
6	* 5926.875	58.10	2.27	60.37	-7.83	68.20	200	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

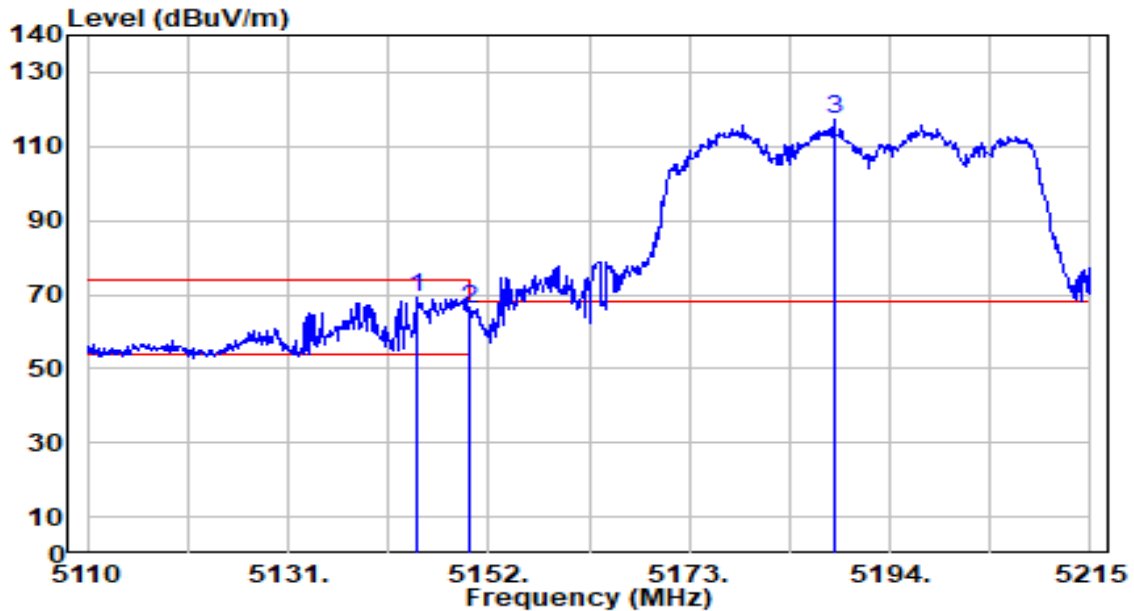


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.440	68.35	0.65	68.99	-5.01	74.00	199	242	Peak
2		5150.000	65.56	0.65	66.22	-7.78	74.00	199	242	Peak
3		5188.120	116.36	0.69	117.05	N/A	N/A	199	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

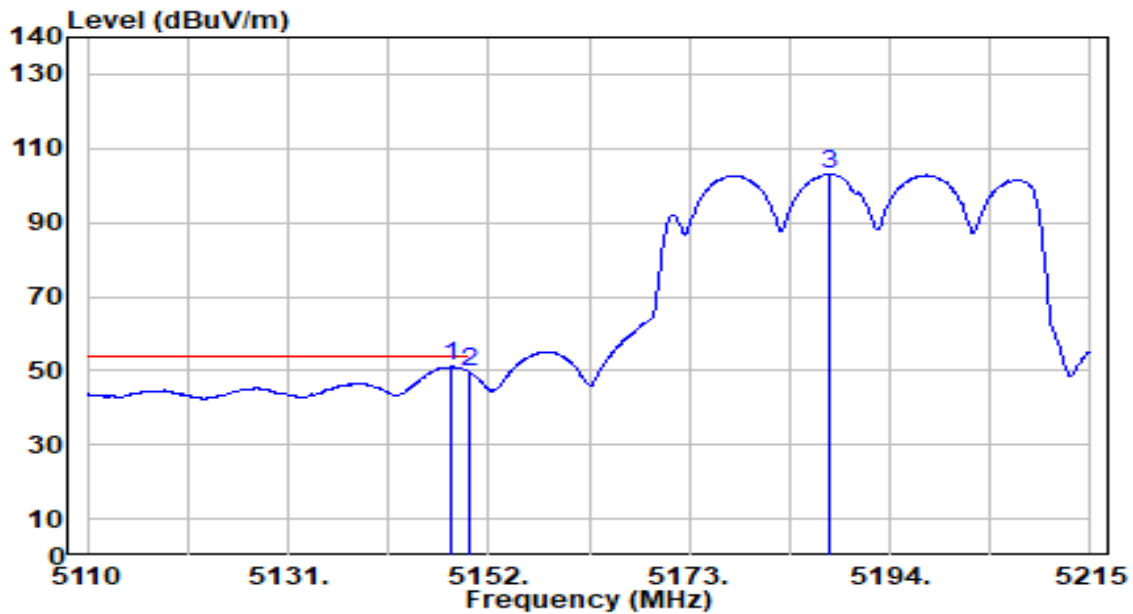


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.115	50.37	0.65	51.02	-2.98	54.00	199	242	Average
2		5150.000	48.91	0.65	49.56	-4.44	54.00	199	242	Average
3		5187.805	102.29	0.69	102.98	N/A	N/A	199	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

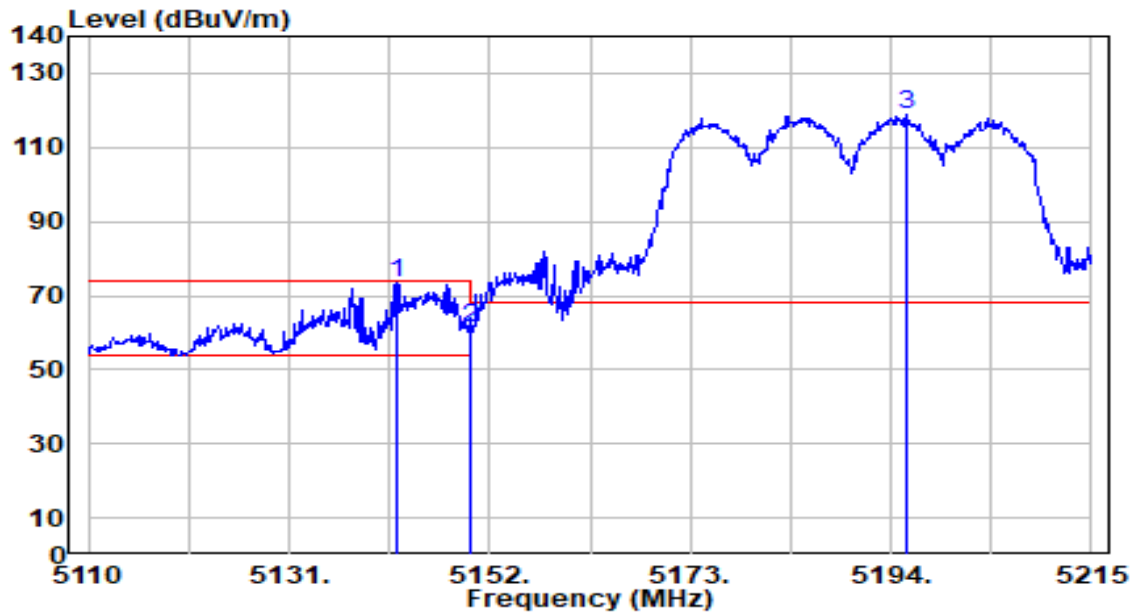


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.340	72.91	0.65	73.55	-0.45	74.00	170	171	Peak
2		5150.000	60.87	0.65	61.53	-12.47	74.00	170	171	Peak
3		5195.680	118.01	0.70	118.71	N/A	N/A	170	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

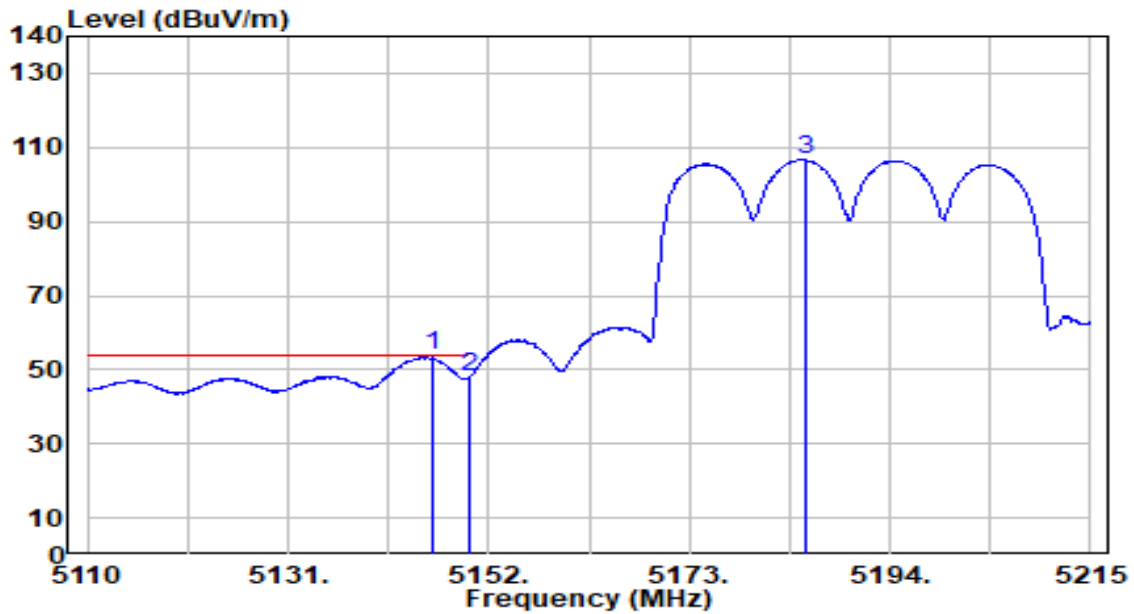


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.015	53.13	0.65	53.78	-0.22	54.00	170	171	Average
2		5150.000	47.17	0.65	47.83	-6.17	54.00	170	171	Average
3		5185.180	105.99	0.69	106.68	N/A	N/A	170	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

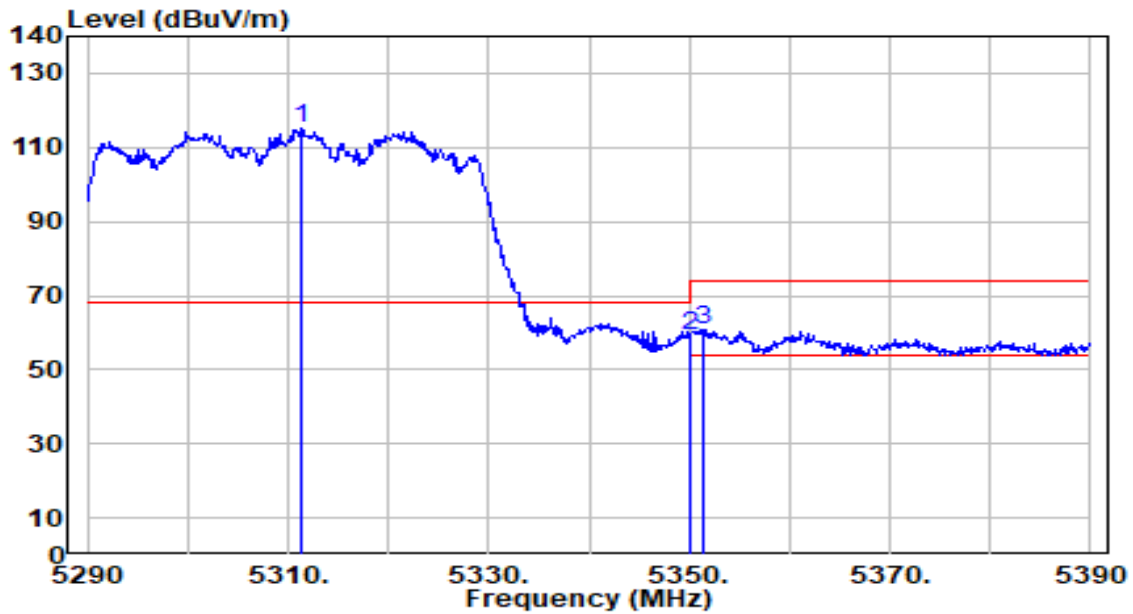


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.300	114.47	0.53	115.00	N/A	N/A	200	126	Peak
2	5350.000	58.69	0.47	59.16	-14.84	74.00	200	126	Peak
3	* 5351.300	60.49	0.47	60.96	-13.04	74.00	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

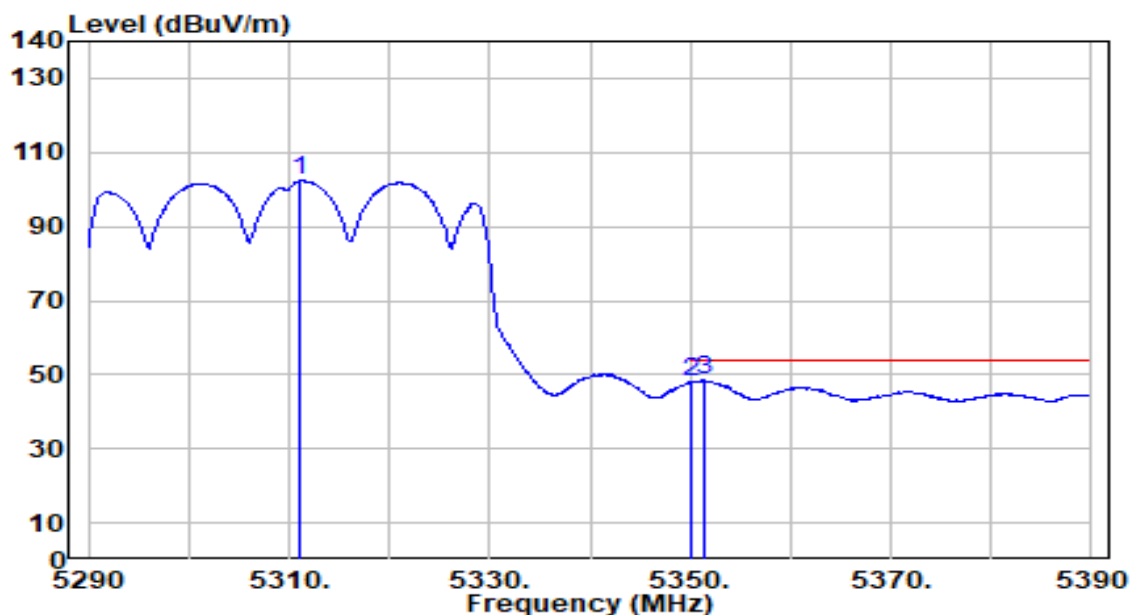


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.100	101.87	0.53	102.40	N/A	N/A	200	126	Average
2	5350.000	47.56	0.47	48.03	-5.97	54.00	200	126	Average
3	* 5351.300	47.99	0.47	48.46	-5.54	54.00	200	126	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

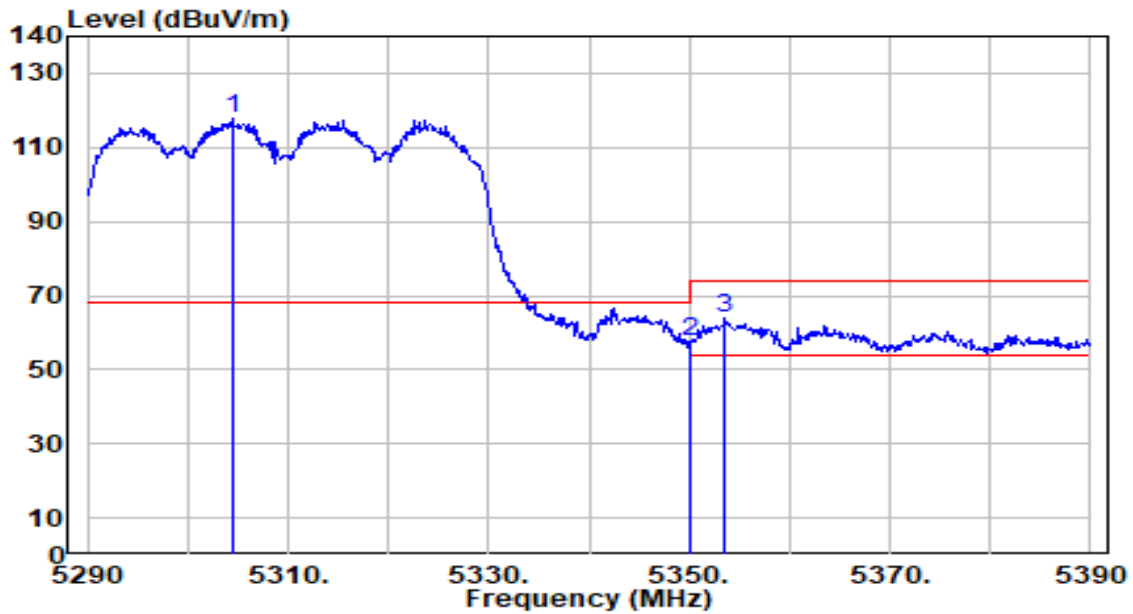


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.400	117.10	0.54	117.64	N/A	N/A	200	182	Peak
2	5350.000	57.15	0.47	57.62	-16.38	74.00	200	182	Peak
3	* 5353.500	63.48	0.47	63.95	-10.05	74.00	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

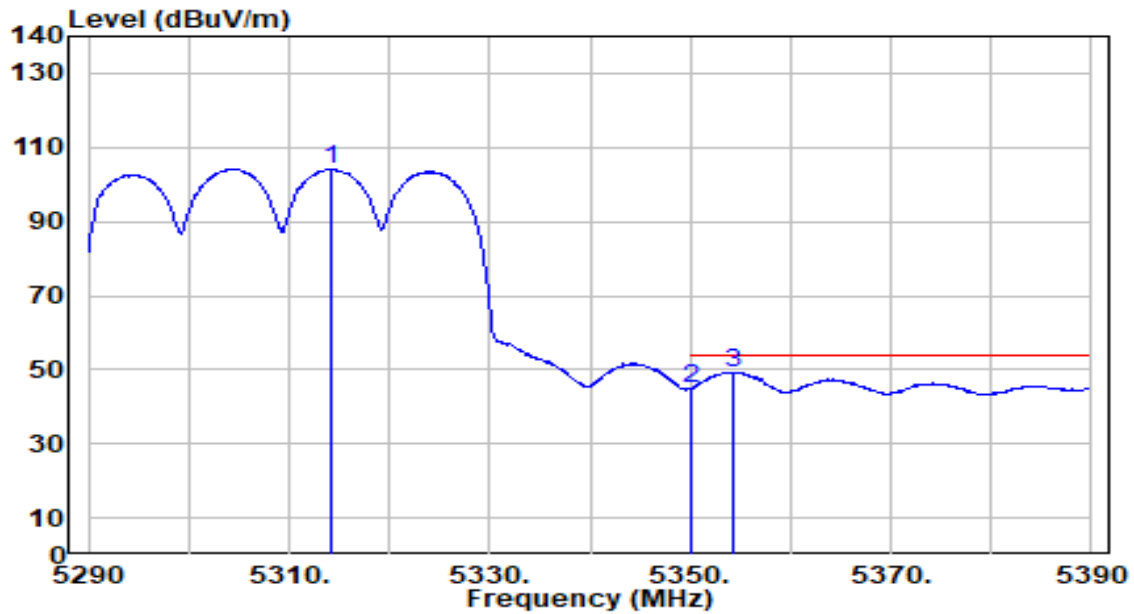


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.200	103.61	0.53	104.13	N/A	N/A	200	182	Average
2	5350.000	44.30	0.47	44.77	-9.23	54.00	200	182	Average
3	* 5354.300	48.87	0.46	49.33	-4.67	54.00	200	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

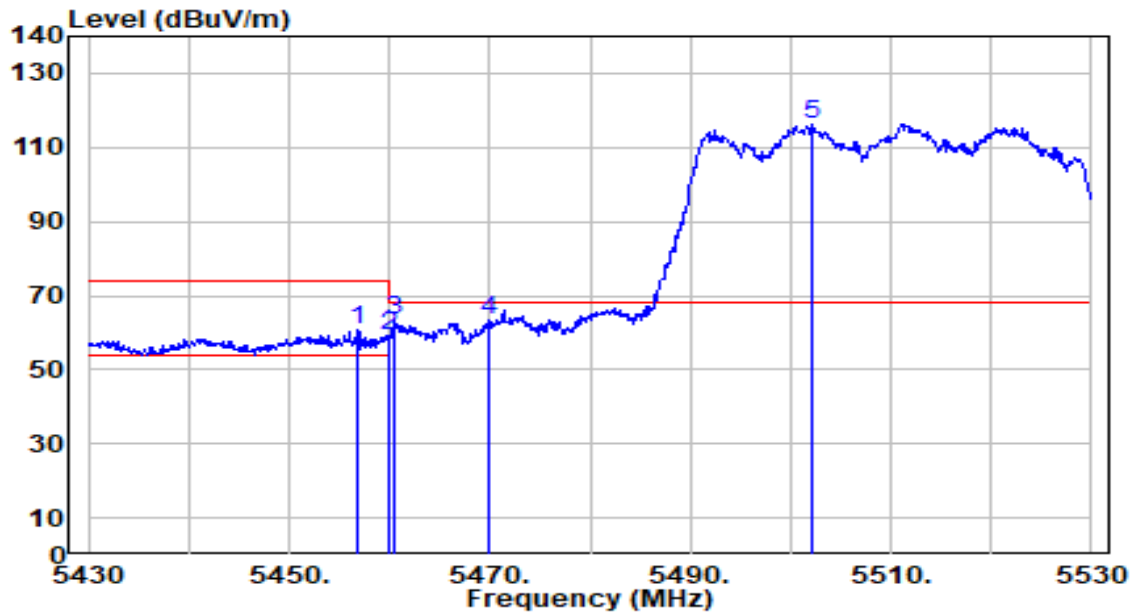


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.900	59.89	0.65	60.54	-13.46	74.00	200	130	Peak
2	5460.000	58.71	0.66	59.38	-14.62	74.00	200	130	Peak
3	* 5460.600	62.97	0.66	63.63	-4.57	68.20	200	130	Peak
4	5470.000	62.58	0.71	63.28	-4.92	68.20	200	130	Peak
5	5502.200	115.44	0.85	116.29	N/A	N/A	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

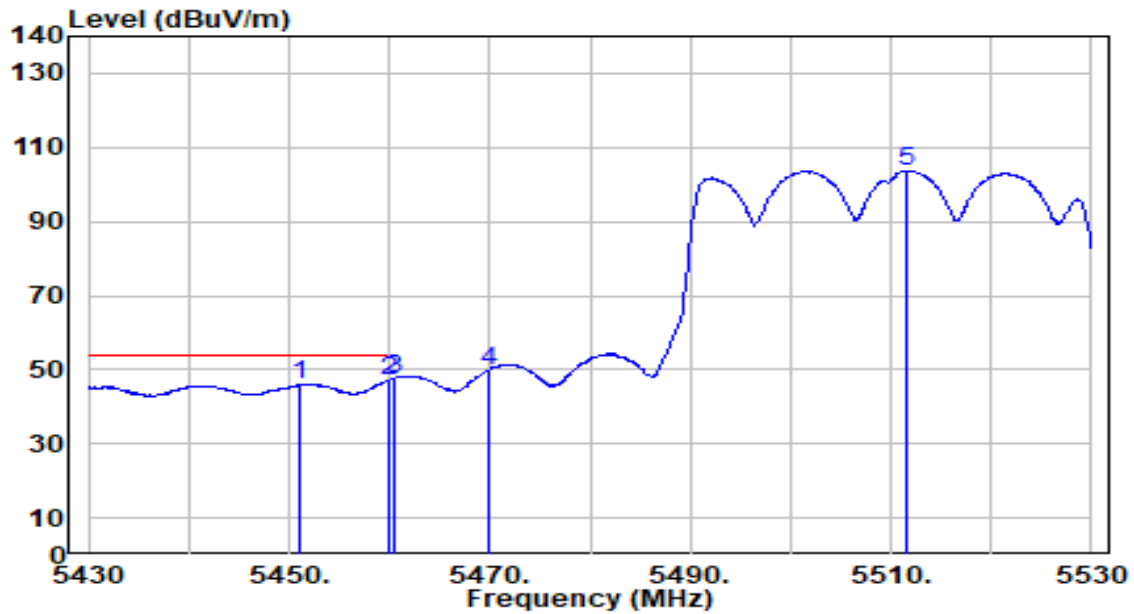


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5451.000	45.44	0.62	46.06	-7.94	54.00	200	130	Average
2	*	5460.000	46.44	0.66	47.10	-6.90	54.00	200	130	Average
3		5460.600	47.07	0.66	47.73	N/A	N/A	200	130	Average
4		5470.000	49.21	0.71	49.91	N/A	N/A	200	130	Average
5		5511.600	102.87	0.89	103.77	N/A	N/A	200	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

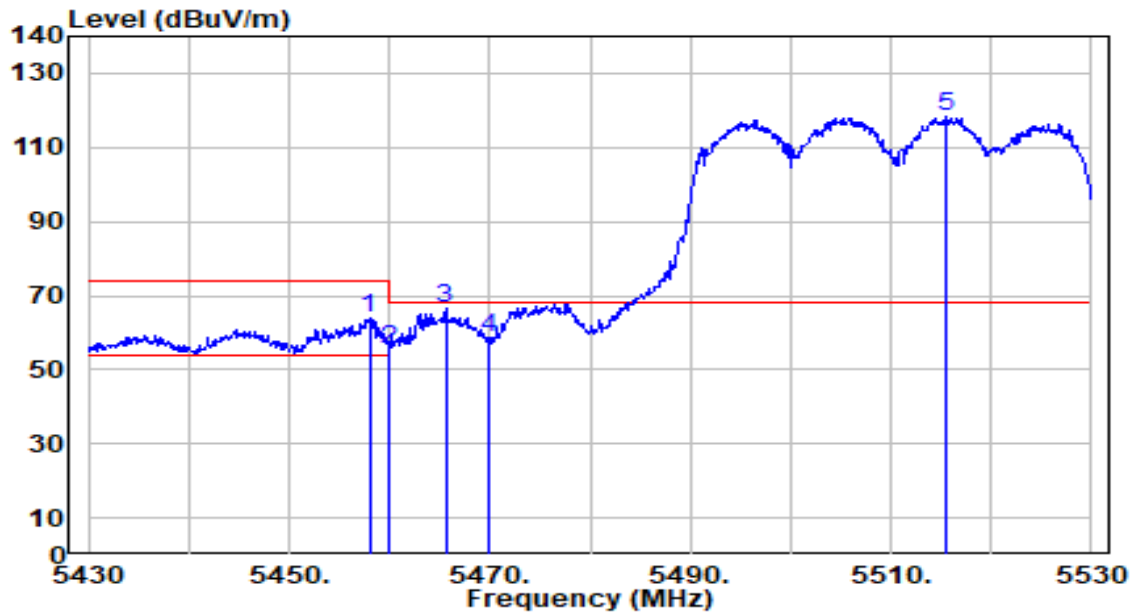


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.000	63.11	0.65	63.76	-10.24	74.00	200	164	Peak
2	5460.000	54.91	0.66	55.57	-18.43	74.00	200	164	Peak
3	* 5465.600	65.78	0.69	66.46	-1.74	68.20	200	164	Peak
4	5470.000	57.83	0.71	58.54	-9.66	68.20	200	164	Peak
5	5515.500	117.49	0.91	118.40	N/A	N/A	200	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

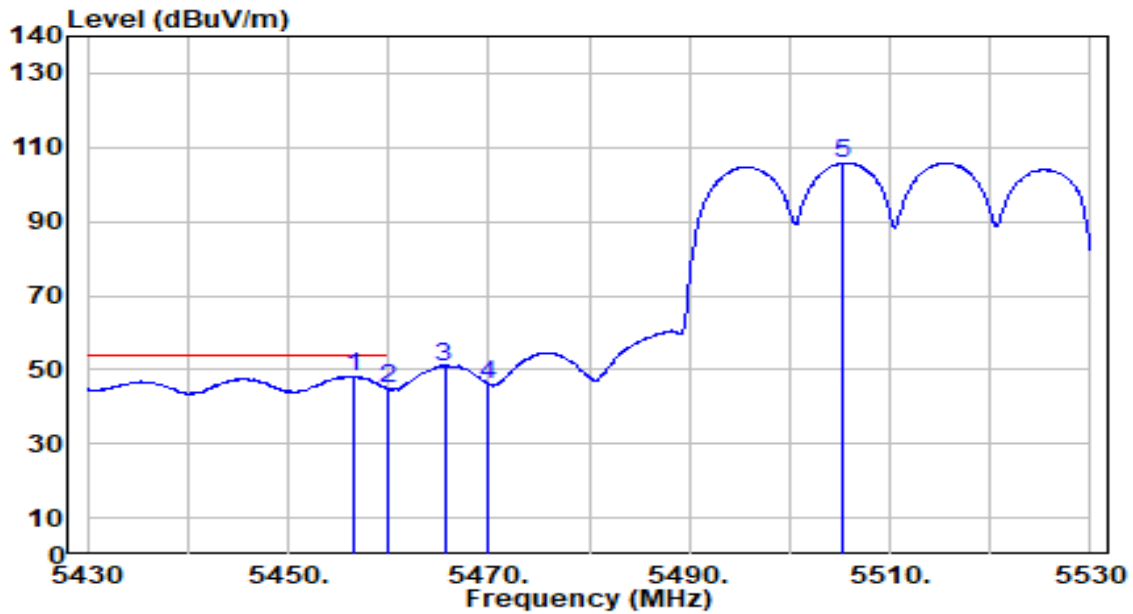


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.600	47.49	0.65	48.14	-5.86	54.00	200	164	Average
2		5460.000	44.29	0.66	44.95	-9.05	54.00	200	164	Average
3		5465.600	50.24	0.69	50.93	N/A	N/A	200	164	Average
4		5470.000	45.27	0.71	45.98	N/A	N/A	200	164	Average
5		5505.400	104.97	0.87	105.83	N/A	N/A	200	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

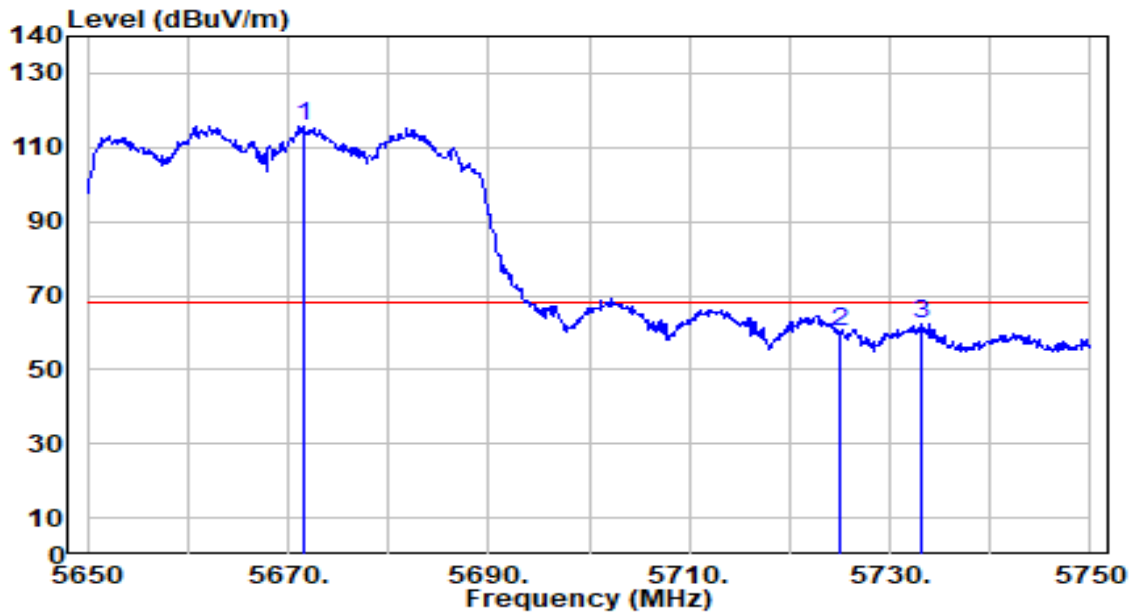


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.600	114.25	1.64	115.90	N/A	N/A	200	118	Peak
2	5725.000	58.47	1.89	60.37	-7.83	68.20	200	118	Peak
3	* 5733.100	60.40	1.93	62.33	-5.87	68.20	200	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

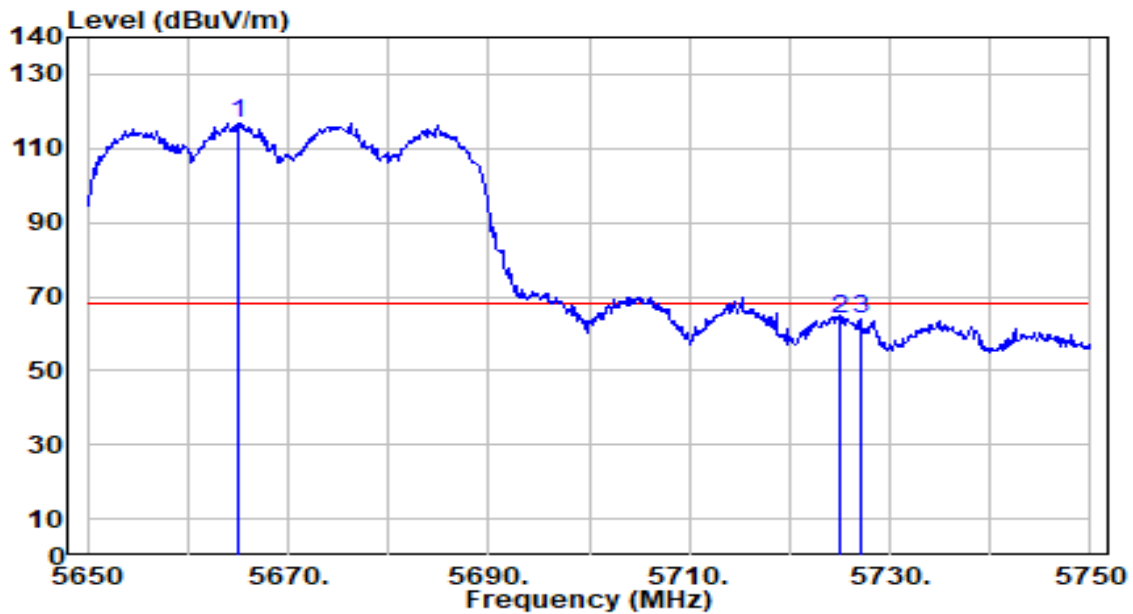


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.000	115.33	1.61	116.94	N/A	N/A	200	182	Peak
2	5725.000	61.81	1.89	63.70	-4.50	68.20	200	182	Peak
3	* 5727.000	62.06	1.90	63.96	-4.24	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

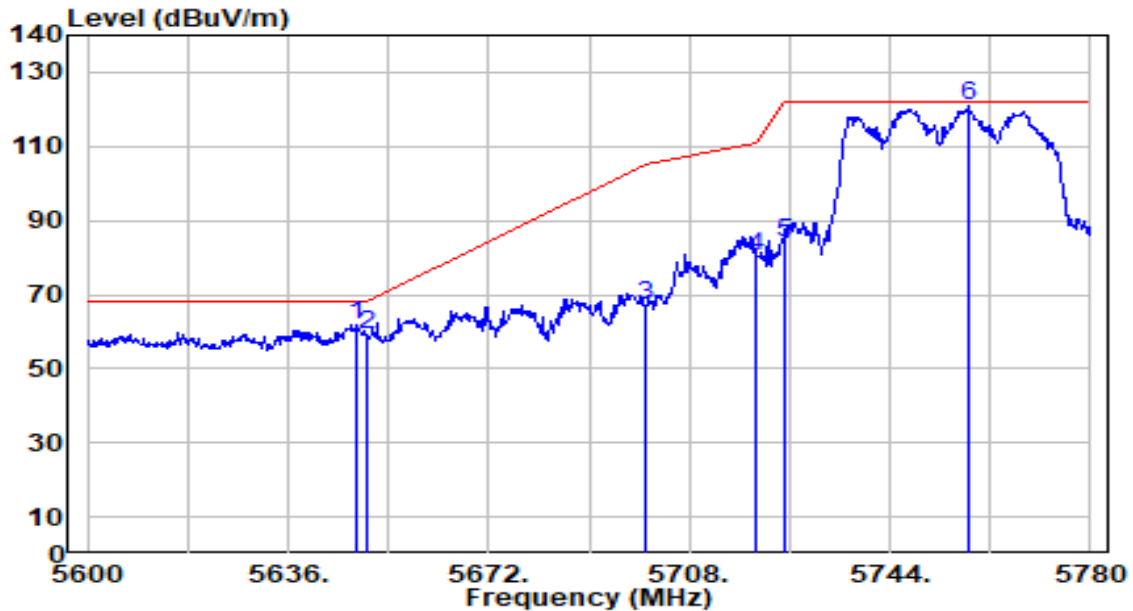


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.420	60.11	1.53	61.65	-6.55	68.20	200	119	Peak
2		5650.000	57.58	1.54	59.12	-9.08	68.20	200	119	Peak
3		5700.000	65.19	1.78	66.97	-38.23	105.20	200	119	Peak
4		5720.000	78.40	1.87	80.27	-30.53	110.80	200	119	Peak
5		5725.000	82.15	1.89	84.04	-38.16	122.20	200	119	Peak
6		5758.040	118.73	2.05	120.78	N/A	N/A	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

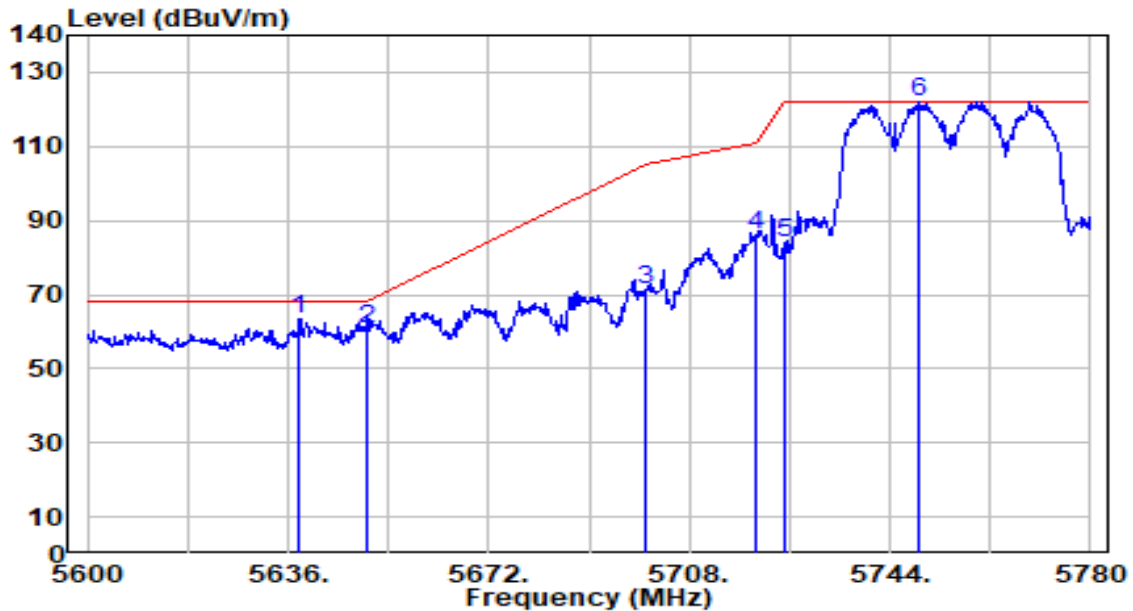


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.980	62.00	1.49	63.49	-4.71	68.20	200	183	Peak
2		5650.000	59.09	1.54	60.63	-7.57	68.20	200	183	Peak
3		5700.000	69.65	1.78	71.42	-33.78	105.20	200	183	Peak
4		5720.000	84.15	1.87	86.02	-24.78	110.80	200	183	Peak
5		5725.000	81.92	1.89	83.82	-38.38	122.20	200	183	Peak
6		5749.400	119.88	2.01	121.89	N/A	N/A	200	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

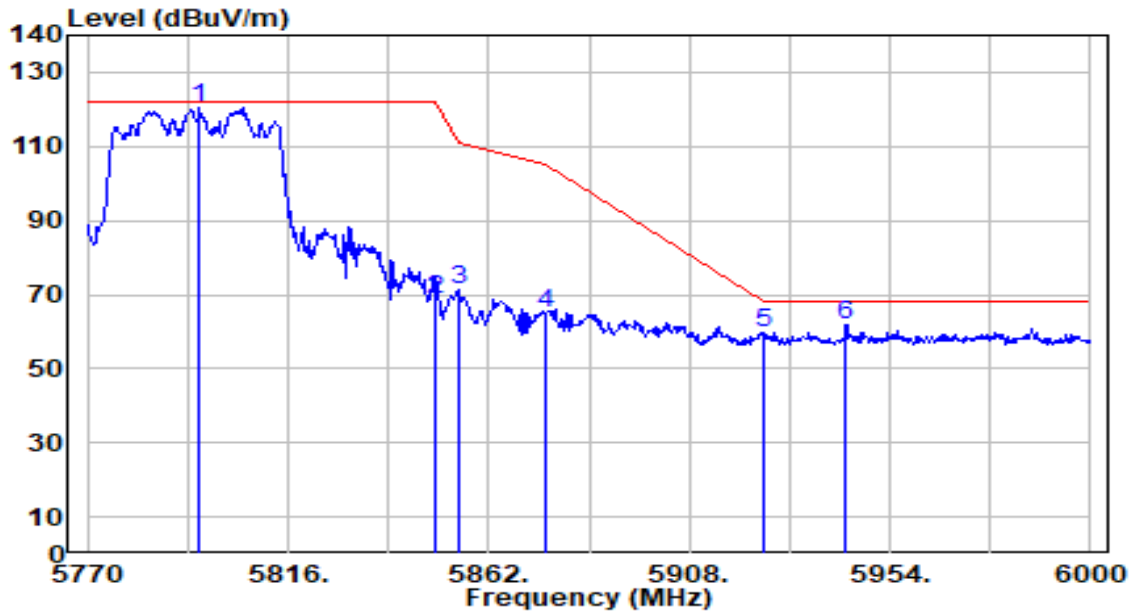


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5795.530	118.08	2.22	120.30	N/A	N/A	200	181	Peak
2	5850.000	66.55	2.25	68.80	-53.40	122.20	200	181	Peak
3	5855.000	68.86	2.25	71.11	-39.69	110.80	200	181	Peak
4	5875.000	62.98	2.26	65.23	-39.97	105.20	200	181	Peak
5	5925.000	57.36	2.27	59.63	-8.57	68.20	200	181	Peak
6	* 5943.880	59.71	2.27	61.98	-6.22	68.20	200	181	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

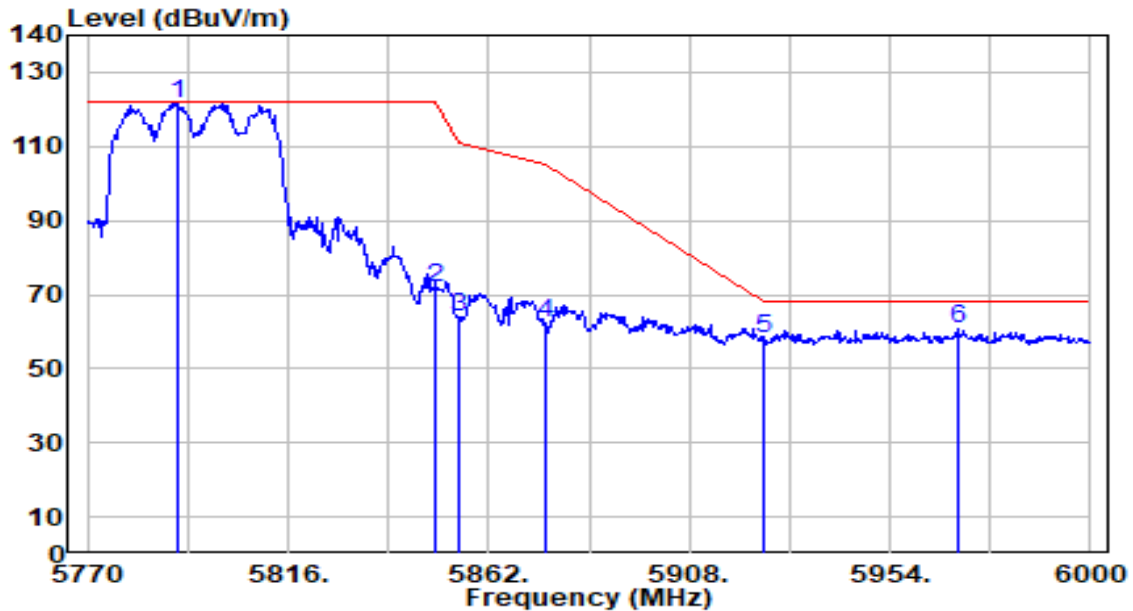


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.470	119.24	2.20	121.44	N/A	N/A	200	173	Peak
2	5850.000	69.35	2.25	71.60	-50.60	122.20	200	173	Peak
3	5855.000	61.91	2.25	64.17	-46.63	110.80	200	173	Peak
4	5875.000	60.05	2.26	62.31	-42.89	105.20	200	173	Peak
5	5925.000	55.81	2.27	58.08	-10.12	68.20	200	173	Peak
6	* 5969.870	58.35	2.27	60.62	-7.58	68.20	200	173	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

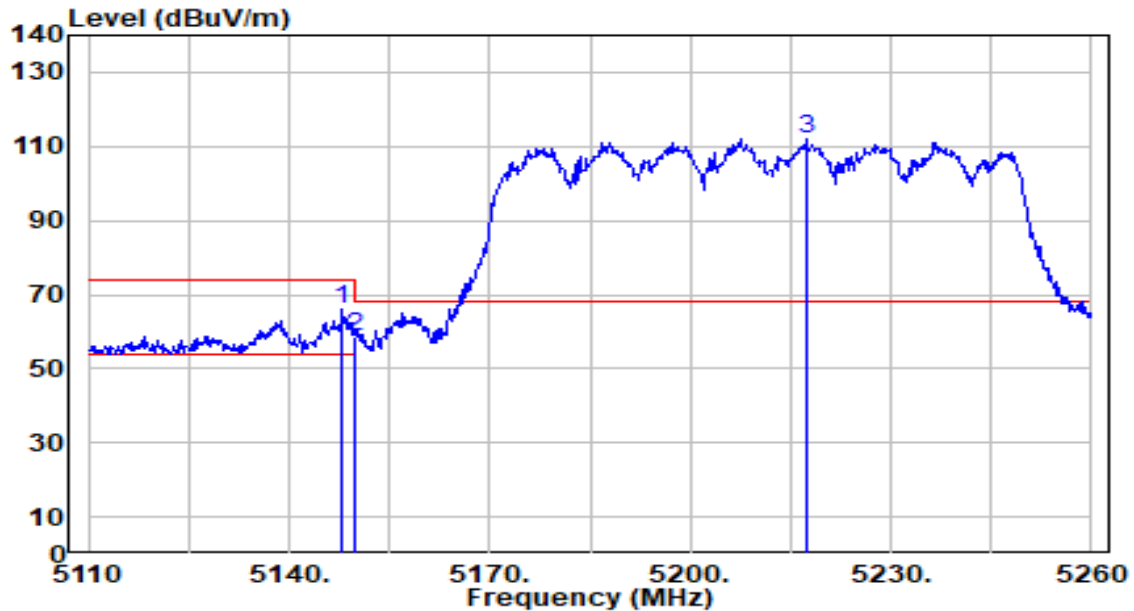


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.950	65.35	0.65	66.00	-8.00	74.00	199	242	Peak
2		5150.000	57.98	0.65	58.63	-15.37	74.00	199	242	Peak
3		5217.250	111.39	0.68	112.07	N/A	N/A	199	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

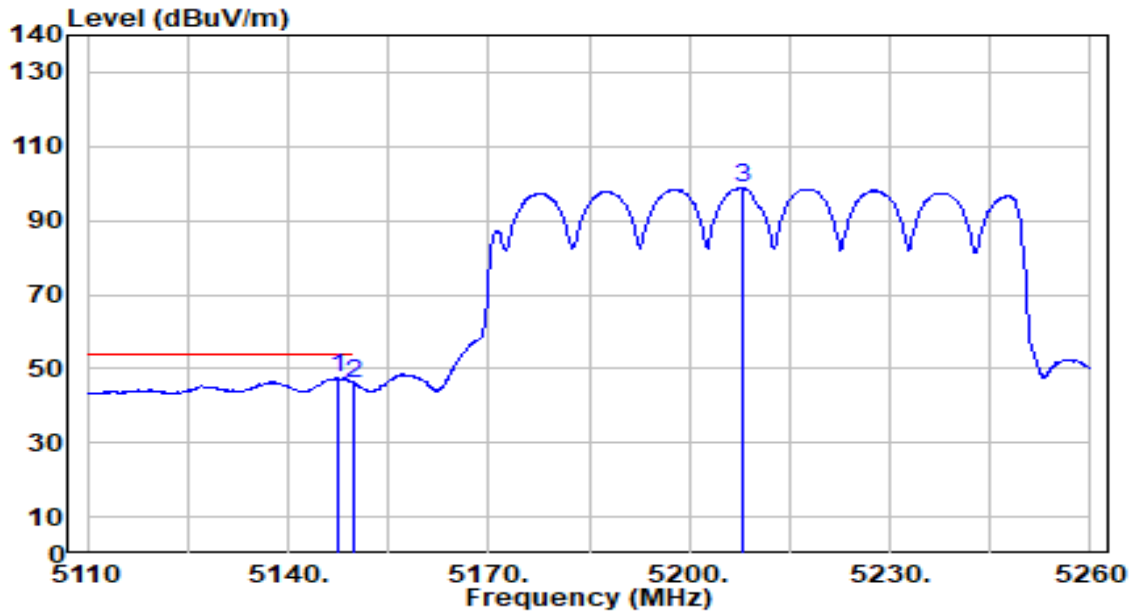


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.350	46.84	0.65	47.49	-6.51	54.00	199	242	Average
2		5150.000	45.37	0.65	46.03	-7.97	54.00	199	242	Average
3		5208.100	98.16	0.69	98.85	N/A	N/A	199	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

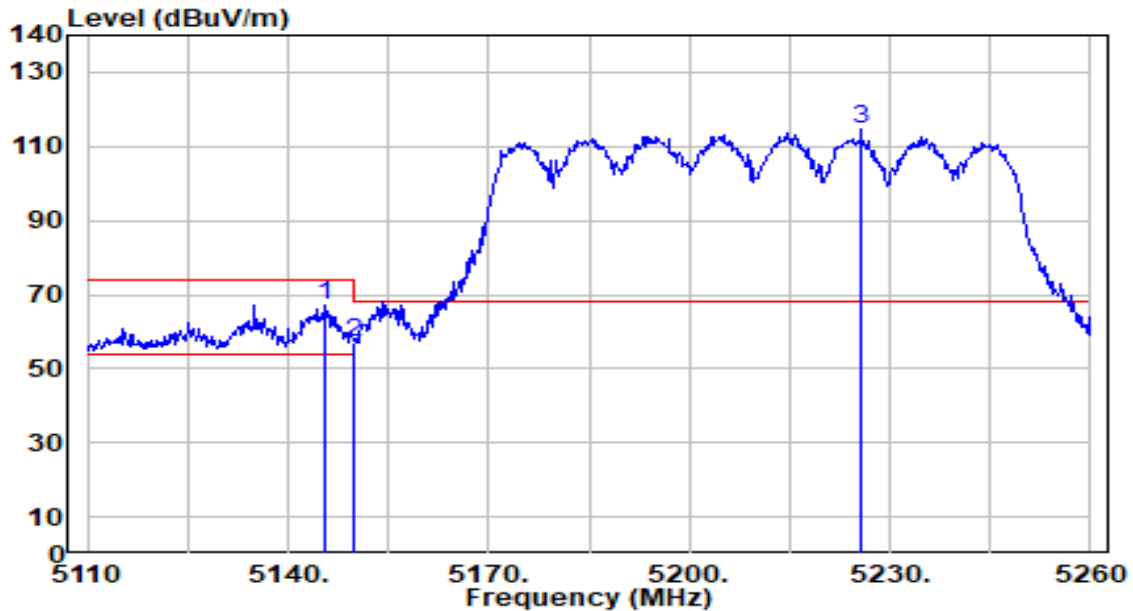


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.700	66.31	0.65	66.96	-7.04	74.00	170	171	Peak
2		5150.000	56.48	0.65	57.13	-16.87	74.00	170	171	Peak
3		5225.650	114.09	0.66	114.75	N/A	N/A	170	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

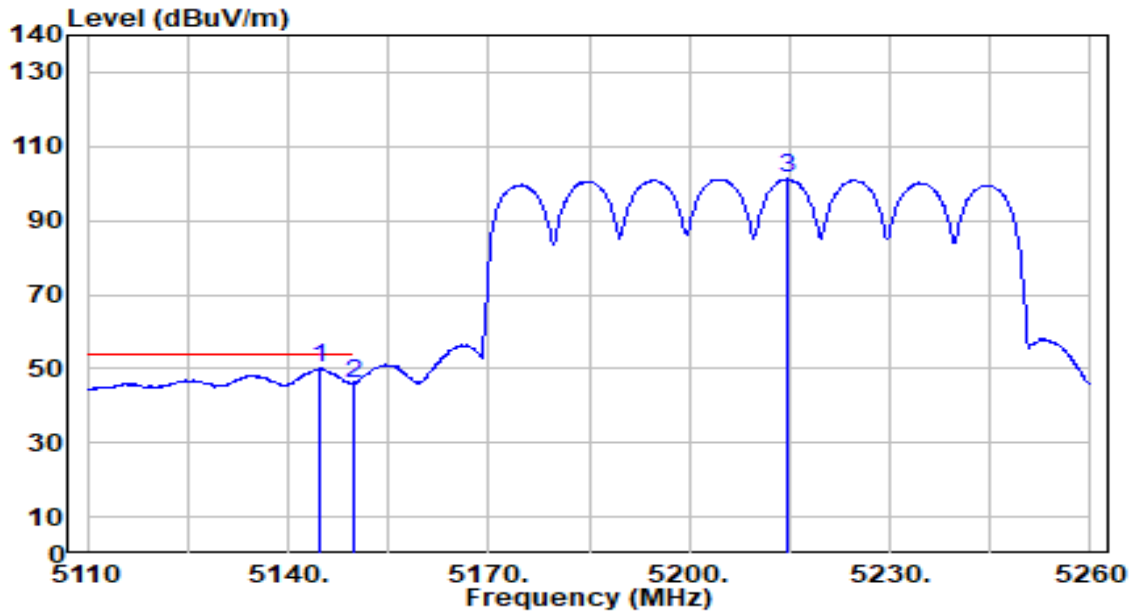


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.650	49.31	0.65	49.96	-4.04	54.00	170	171	Average
2		5150.000	45.49	0.65	46.15	-7.85	54.00	170	171	Average
3		5214.850	100.53	0.68	101.21	N/A	N/A	170	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

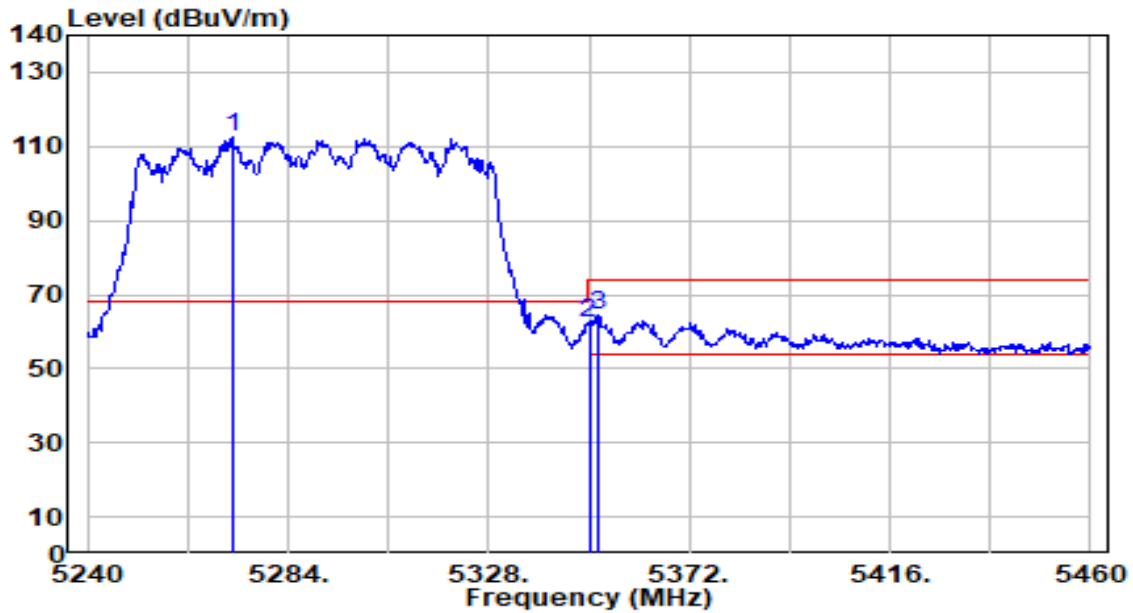


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5271.680	111.92	0.59	112.52	N/A	N/A	200	126	Peak
2	5350.000	61.65	0.47	62.12	-11.88	74.00	200	126	Peak
3	* 5351.760	63.79	0.47	64.26	-9.74	74.00	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

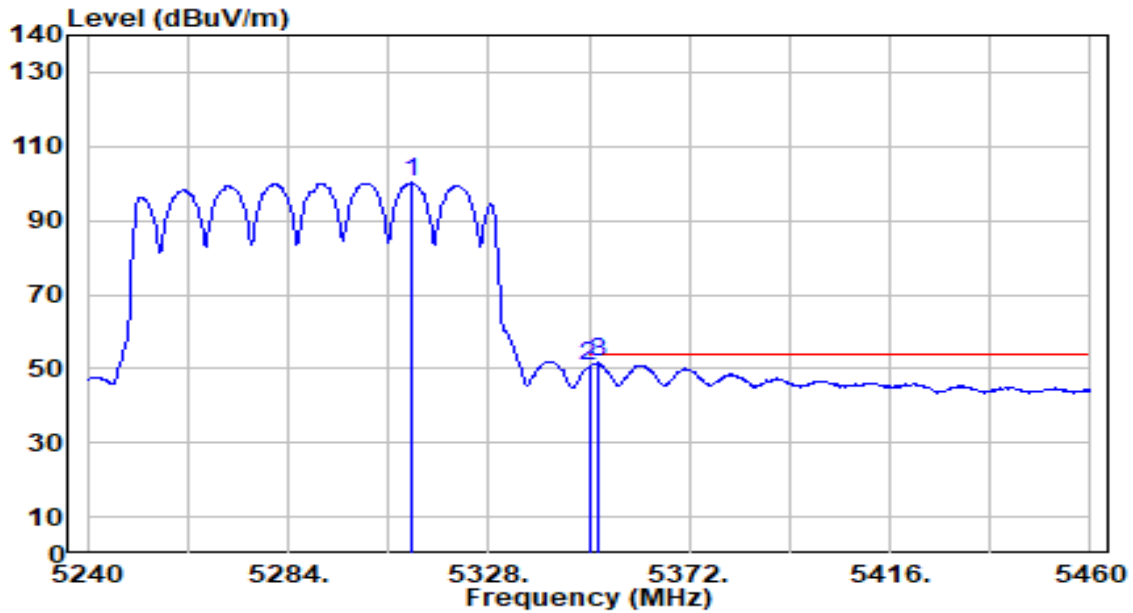


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.060	99.62	0.53	100.15	N/A	N/A	200	126	Average
2	5350.000	50.08	0.47	50.55	-3.45	54.00	200	126	Average
3	* 5351.760	51.14	0.47	51.61	-2.39	54.00	200	126	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

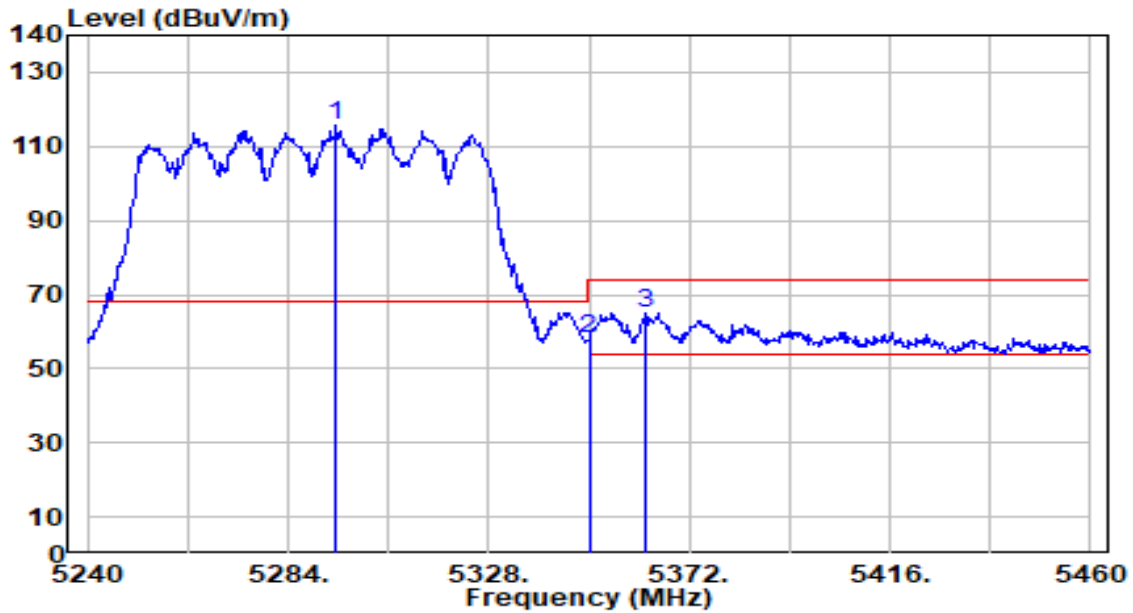


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.560	114.96	0.56	115.52	N/A	N/A	200	182	Peak
2	5350.000	57.70	0.47	58.17	-15.83	74.00	200	182	Peak
3	* 5362.540	64.72	0.45	65.17	-8.83	74.00	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

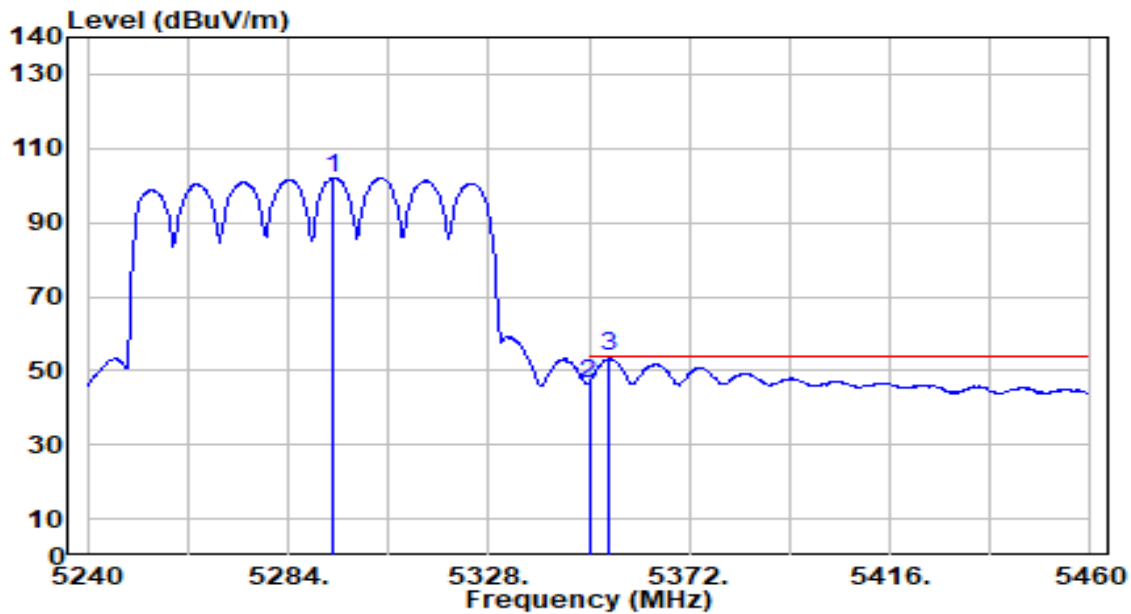


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5293.900	101.55	0.56	102.11	N/A	N/A	200	182	Average
2	5350.000	46.27	0.47	46.75	-7.26	54.00	200	182	Average
3	* 5354.180	53.24	0.46	53.70	-0.30	54.00	200	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

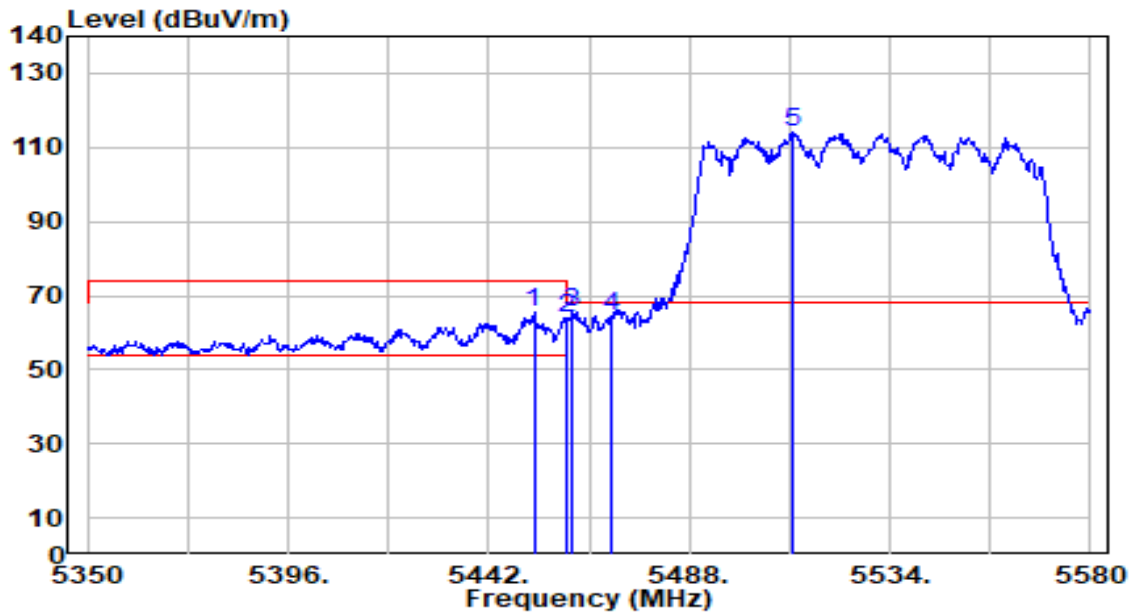


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.350	64.67	0.63	65.30	-8.70	74.00	200	130	Peak
2	5460.000	63.08	0.66	63.74	-10.26	74.00	200	130	Peak
3	* 5461.090	64.64	0.67	65.31	-2.89	68.20	200	130	Peak
4	5470.000	63.54	0.71	64.25	-3.95	68.20	200	130	Peak
5	5511.460	113.26	0.89	114.16	N/A	N/A	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

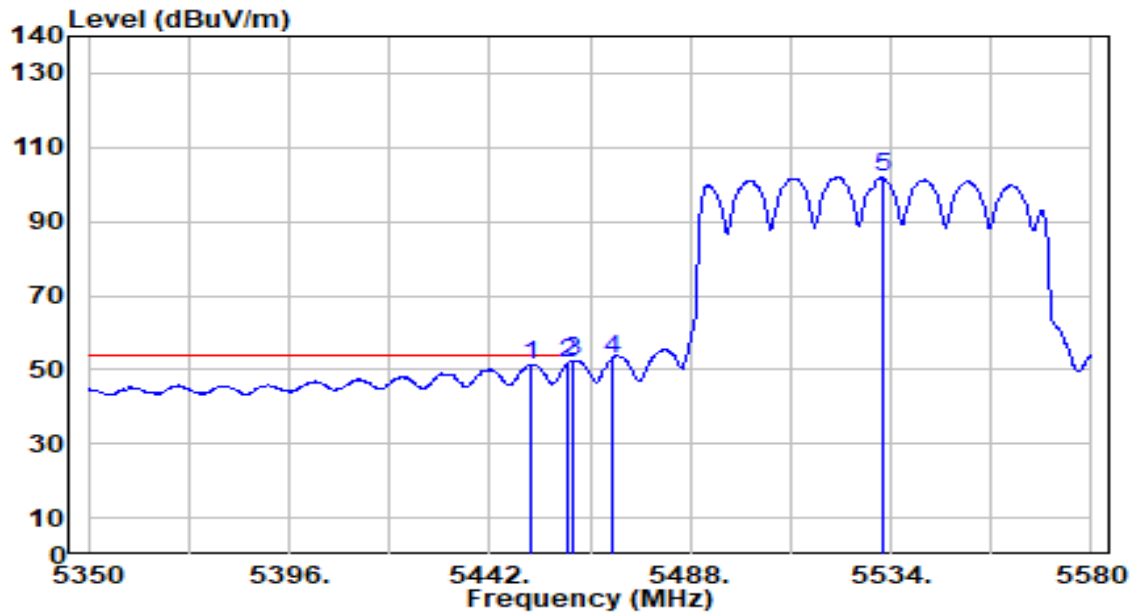


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5451.660	50.70	0.62	51.32	-2.68	54.00	200	130	Average
2	*	5460.000	51.16	0.66	51.82	-2.18	54.00	200	130	Average
3		5461.090	51.79	0.67	52.46	N/A	N/A	200	130	Average
4		5470.000	52.33	0.71	53.04	N/A	N/A	200	130	Average
5		5531.930	100.89	0.99	101.88	N/A	N/A	200	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

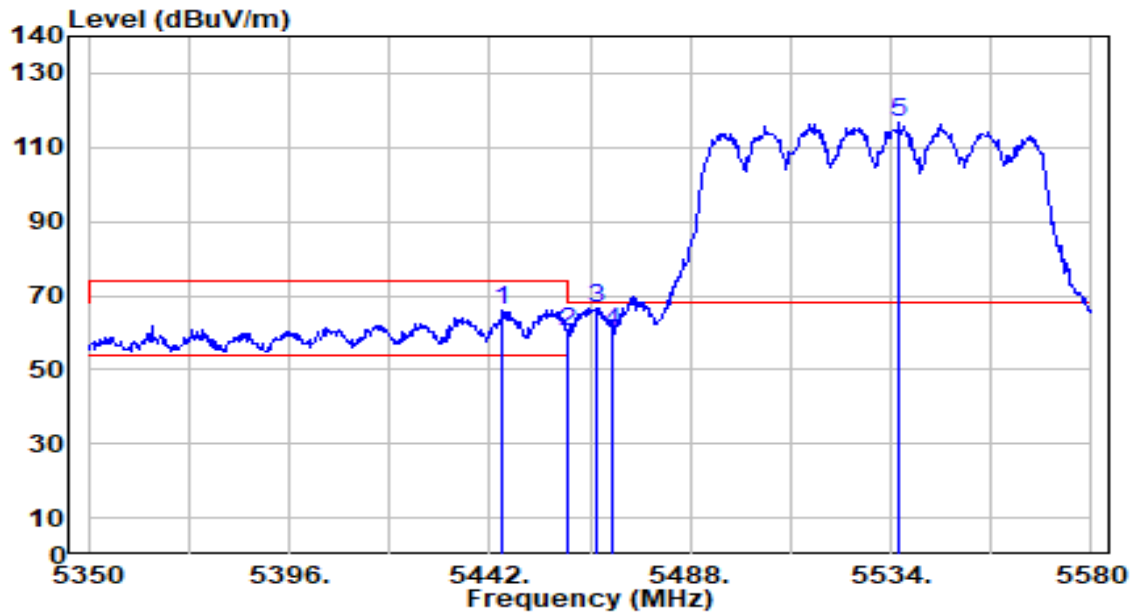


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.990	65.28	0.59	65.88	-8.12	74.00	200	164	Peak
2	5460.000	59.33	0.66	59.99	-14.01	74.00	200	164	Peak
3	* 5466.610	65.74	0.69	66.43	-1.77	68.20	200	164	Peak
4	5470.000	59.68	0.71	60.39	-7.81	68.20	200	164	Peak
5	5535.840	115.50	1.01	116.51	N/A	N/A	200	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

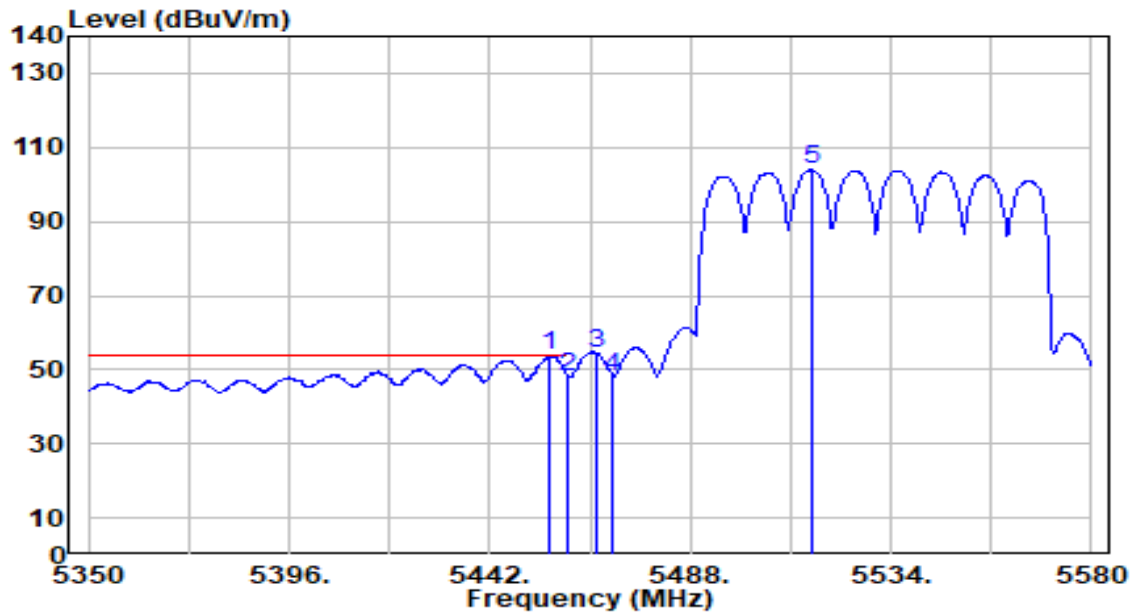


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.570	53.09	0.64	53.73	-0.27	54.00	200	164	Average
2		5460.000	47.64	0.66	48.31	-5.69	54.00	200	164	Average
3		5466.610	53.95	0.69	54.64	N/A	N/A	200	164	Average
4		5470.000	47.51	0.71	48.21	N/A	N/A	200	164	Average
5		5515.830	103.08	0.91	103.99	N/A	N/A	200	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

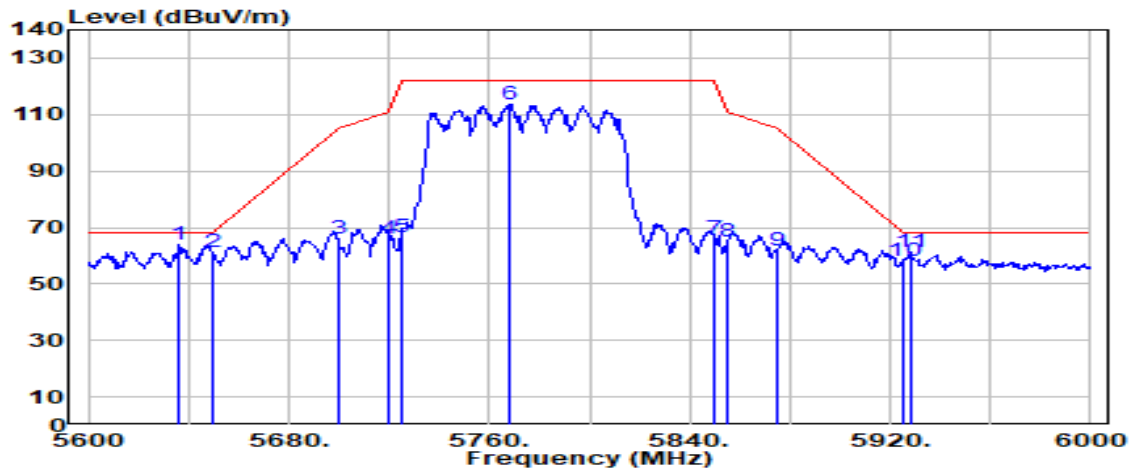


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.400	62.49	1.48	63.97	-4.23	68.20	200	119	Peak
2		5650.000	59.49	1.54	61.03	-7.17	68.20	200	119	Peak
3		5700.000	64.46	1.78	66.23	-38.97	105.20	200	119	Peak
4		5720.000	64.12	1.87	65.99	-44.81	110.80	200	119	Peak
5		5725.000	64.89	1.89	66.78	-55.42	122.20	200	119	Peak
6		5768.000	111.65	2.09	113.75	N/A	N/A	200	119	Peak
7		5850.000	63.75	2.25	66.00	-56.20	122.20	200	119	Peak
8		5855.000	62.68	2.25	64.93	-45.87	110.80	200	119	Peak
9		5875.000	59.60	2.26	61.85	-43.35	105.20	200	119	Peak
10		5925.000	55.60	2.27	57.86	-10.34	68.20	200	119	Peak
11		5928.400	58.80	2.27	61.07	-7.13	68.20	200	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

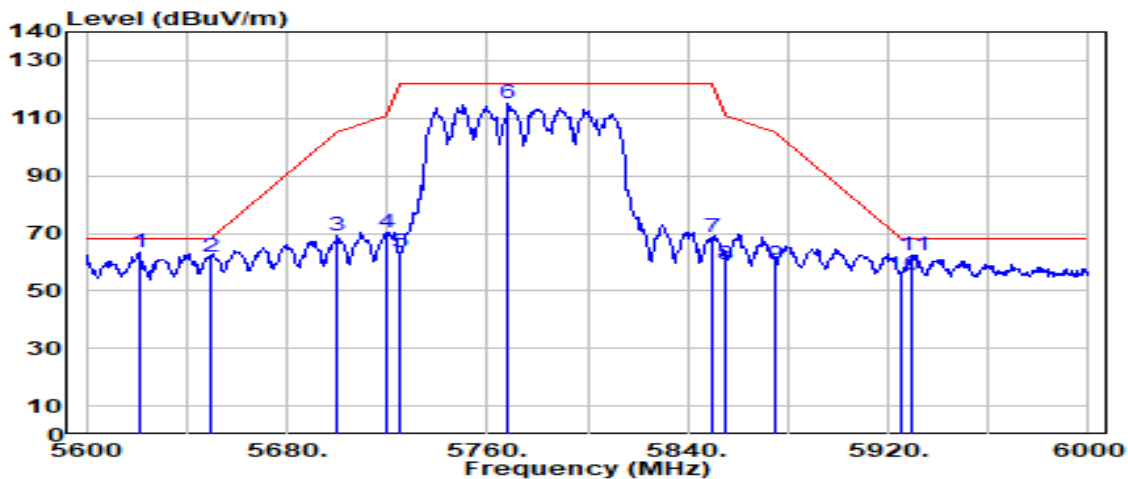


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5621.200	61.98	1.41	63.39	-4.81	68.20	200	183	Peak
2		5650.000	60.10	1.54	61.64	-6.56	68.20	200	183	Peak
3		5700.000	67.67	1.78	69.44	-35.76	105.20	200	183	Peak
4		5720.000	68.28	1.87	70.15	-40.65	110.80	200	183	Peak
5		5725.000	61.76	1.89	63.65	-58.55	122.20	200	183	Peak
6		5768.400	112.87	2.10	114.97	N/A	N/A	200	183	Peak
7		5850.000	66.35	2.25	68.60	-53.60	122.20	200	183	Peak
8		5855.000	57.08	2.25	59.33	-51.47	110.80	200	183	Peak
9		5875.000	56.95	2.26	59.20	-46.00	105.20	200	183	Peak
10		5925.000	53.04	2.27	55.31	-12.89	68.20	200	183	Peak
11		5929.600	59.99	2.27	62.25	-5.95	68.20	200	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

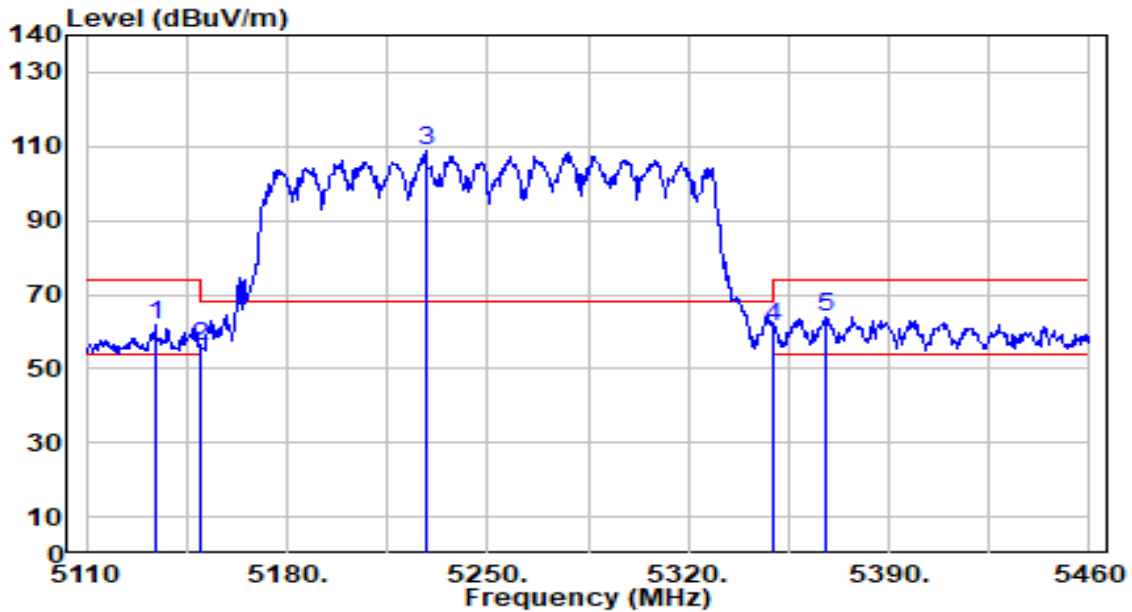


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5133.800	61.30	0.64	61.93	-12.07	74.00	199	242	Peak
2	5150.000	55.52	0.65	56.18	-17.82	74.00	199	242	Peak
3	5228.300	108.04	0.66	108.70	N/A	N/A	199	242	Peak
4	5350.000	60.59	0.47	61.06	-12.94	74.00	199	242	Peak
5	* 5368.300	63.38	0.44	63.82	-10.18	74.00	199	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

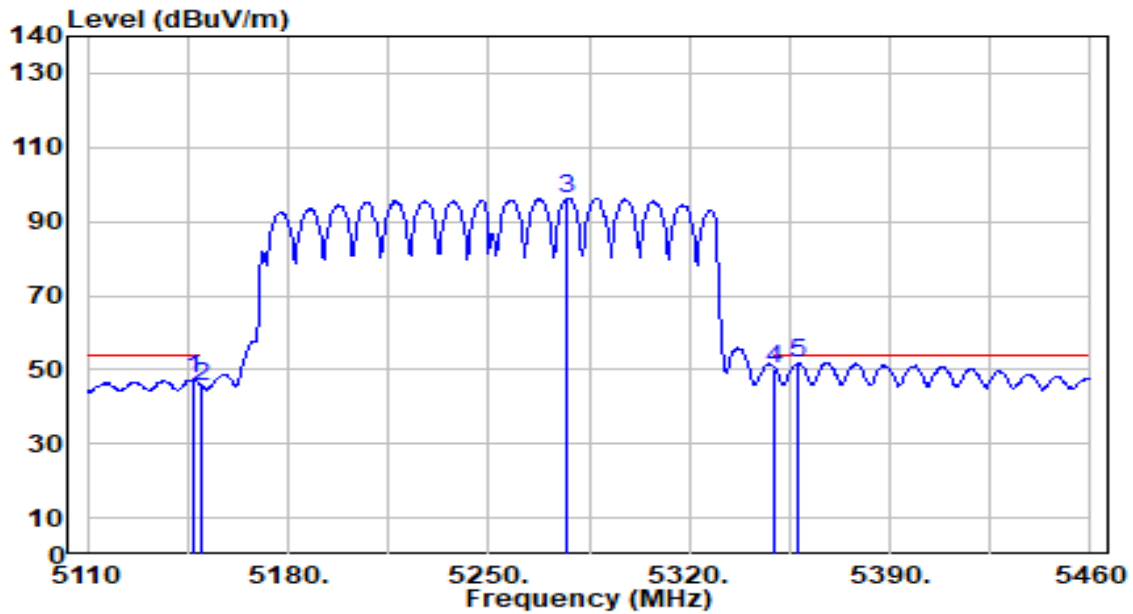


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.100	46.83	0.65	47.48	-6.52	54.00	199	242	Average
2	5150.000	44.90	0.65	45.56	-8.44	54.00	199	242	Average
3	5277.650	95.81	0.58	96.39	N/A	N/A	199	242	Average
4	5350.000	49.77	0.47	50.24	-3.76	54.00	199	242	Average
5	* 5357.800	51.39	0.46	51.85	-2.15	54.00	199	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

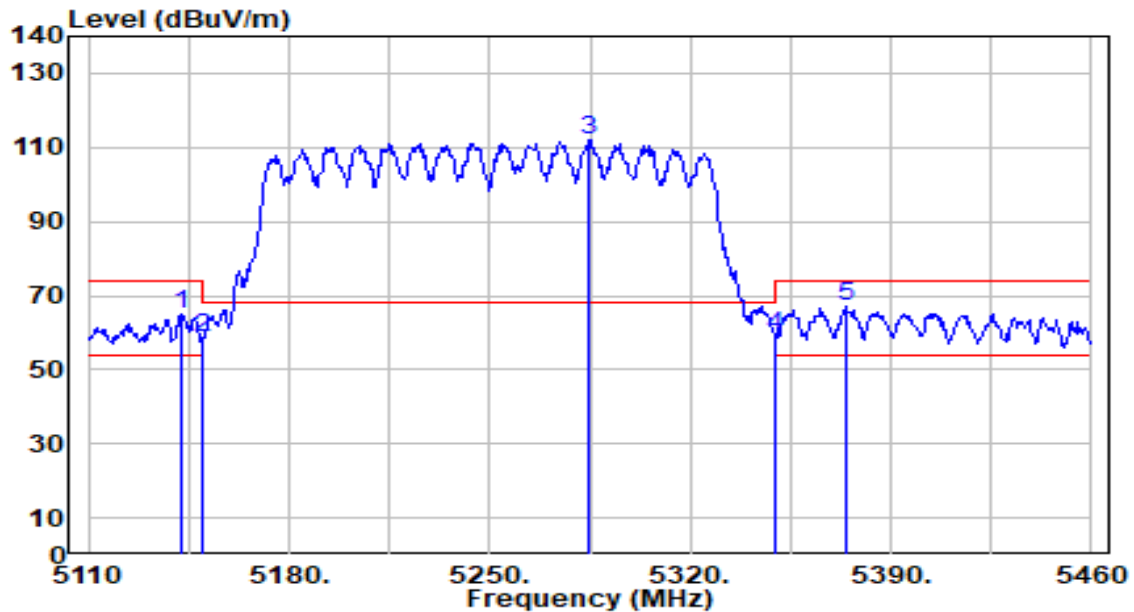


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5142.550	64.42	0.65	65.07	-8.93	74.00	170	171	Peak
2	5150.000	57.79	0.65	58.44	-15.56	74.00	170	171	Peak
3	5284.650	111.26	0.57	111.84	N/A	N/A	170	171	Peak
4	5350.000	58.80	0.47	59.27	-14.73	74.00	170	171	Peak
5	* 5374.250	66.77	0.43	67.20	-6.80	74.00	170	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

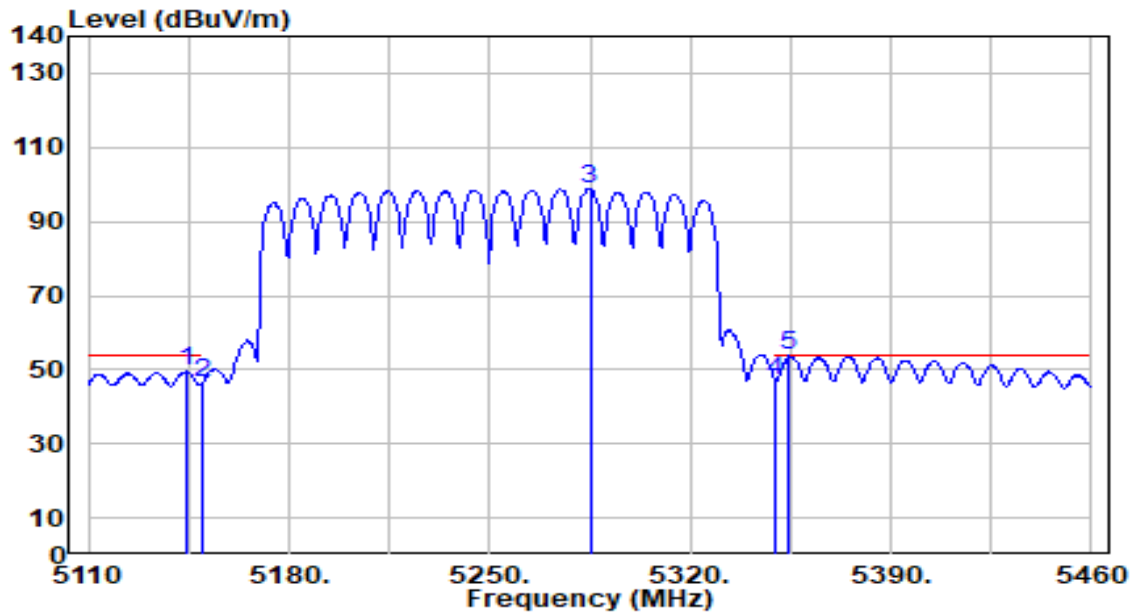


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.950	48.79	0.65	49.44	-4.56	54.00	170	171	Average
2	5150.000	46.04	0.65	46.69	-7.31	54.00	170	171	Average
3	5285.000	98.32	0.57	98.89	N/A	N/A	170	171	Average
4	5350.000	46.43	0.47	46.90	-7.10	54.00	170	171	Average
5	* 5354.650	53.27	0.46	53.73	-0.27	54.00	170	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

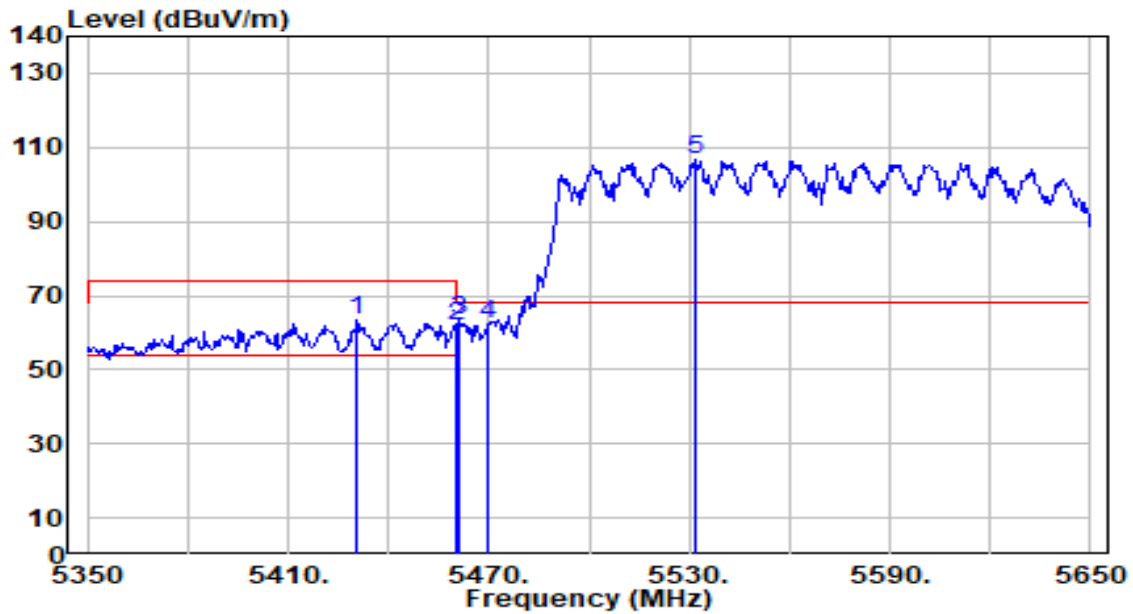


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5430.700	62.61	0.53	63.14	-10.86	74.00	200	130	Peak
2	5460.000	61.04	0.66	61.71	-12.29	74.00	200	130	Peak
3	* 5461.300	62.54	0.67	63.20	-5.00	68.20	200	130	Peak
4	5470.000	61.88	0.71	62.59	-5.61	68.20	200	130	Peak
5	5531.500	105.93	0.99	106.92	N/A	N/A	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

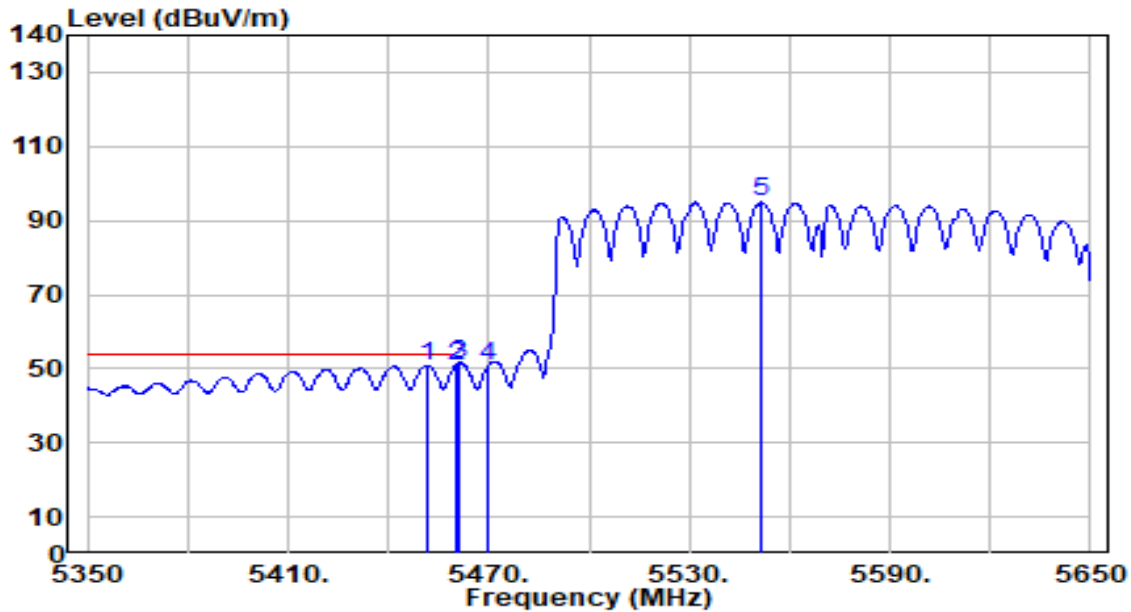


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.000	50.34	0.63	50.97	-3.03	54.00	200	130	Average
2		5460.000	50.22	0.66	50.89	-3.11	54.00	200	130	Average
3		5461.300	50.78	0.67	51.45	N/A	N/A	200	130	Average
4		5470.000	50.09	0.71	50.80	N/A	N/A	200	130	Average
5		5551.600	93.76	1.08	94.84	N/A	N/A	200	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

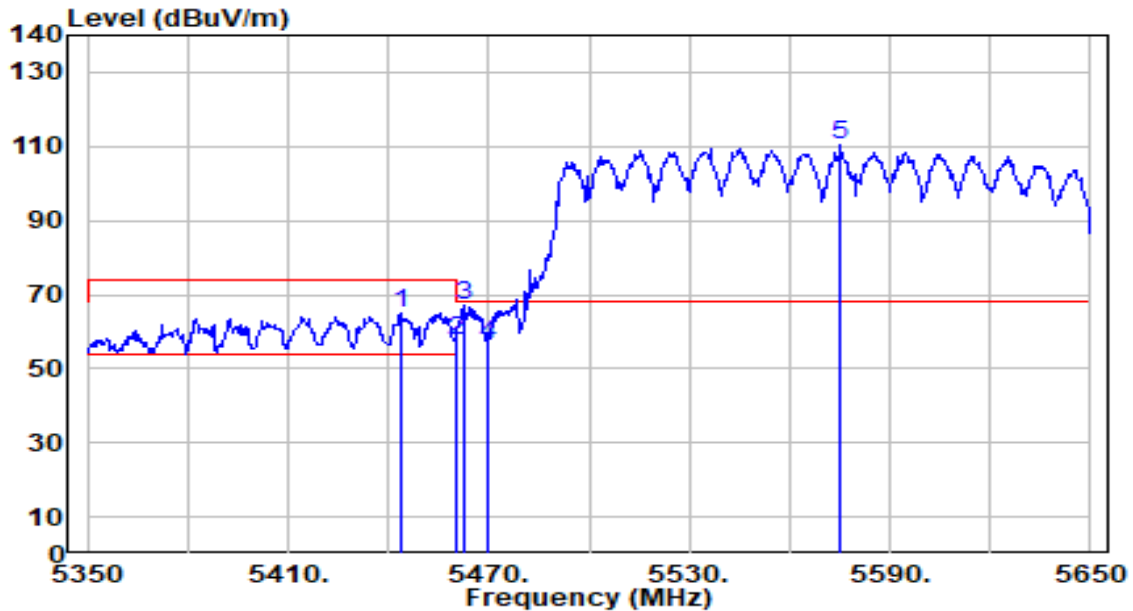


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.200	64.61	0.59	65.20	-8.80	74.00	200	164	Peak
2	5460.000	56.91	0.66	57.57	-16.43	74.00	200	164	Peak
3	* 5462.500	66.21	0.67	66.88	-1.32	68.20	200	164	Peak
4	5470.000	55.70	0.71	56.41	-11.79	68.20	200	164	Peak
5	5575.000	109.36	1.19	110.55	N/A	N/A	200	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

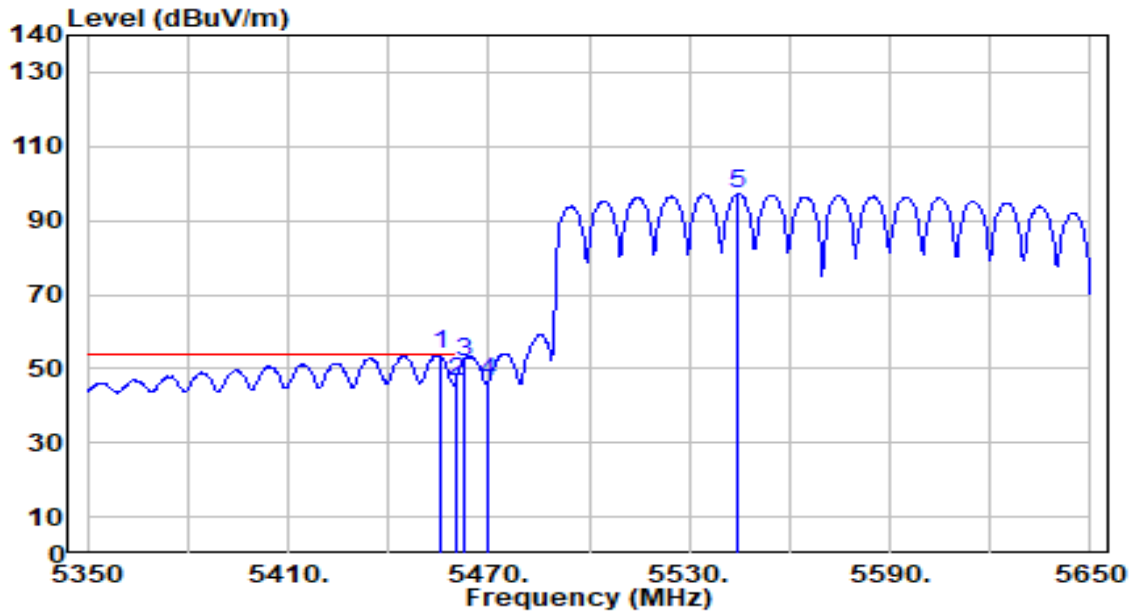


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.600	53.17	0.64	53.81	-0.19	54.00	200	164	Average
2		5460.000	45.83	0.66	46.49	-7.51	54.00	200	164	Average
3		5462.500	51.28	0.67	51.95	N/A	N/A	200	164	Average
4		5470.000	45.65	0.71	46.36	N/A	N/A	200	164	Average
5		5544.700	96.03	1.05	97.08	N/A	N/A	200	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

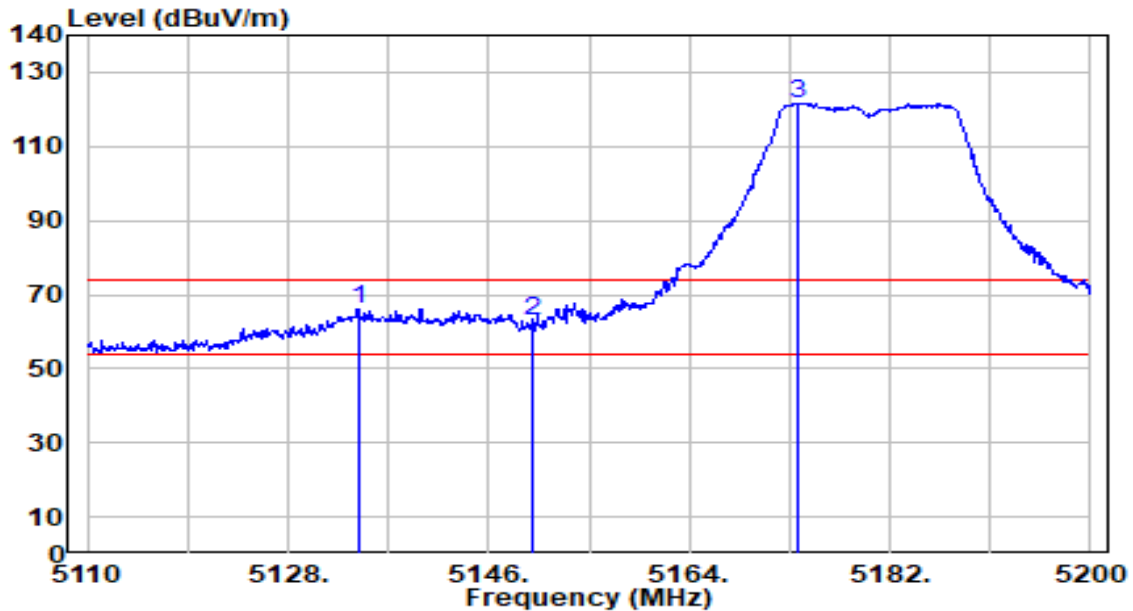


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.300	65.29	0.64	65.93	-8.07	74.00	167	178	Peak
2		5150.000	62.16	0.65	62.82	-11.18	74.00	167	178	Peak
3		5173.810	121.00	0.68	121.68	N/A	N/A	167	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

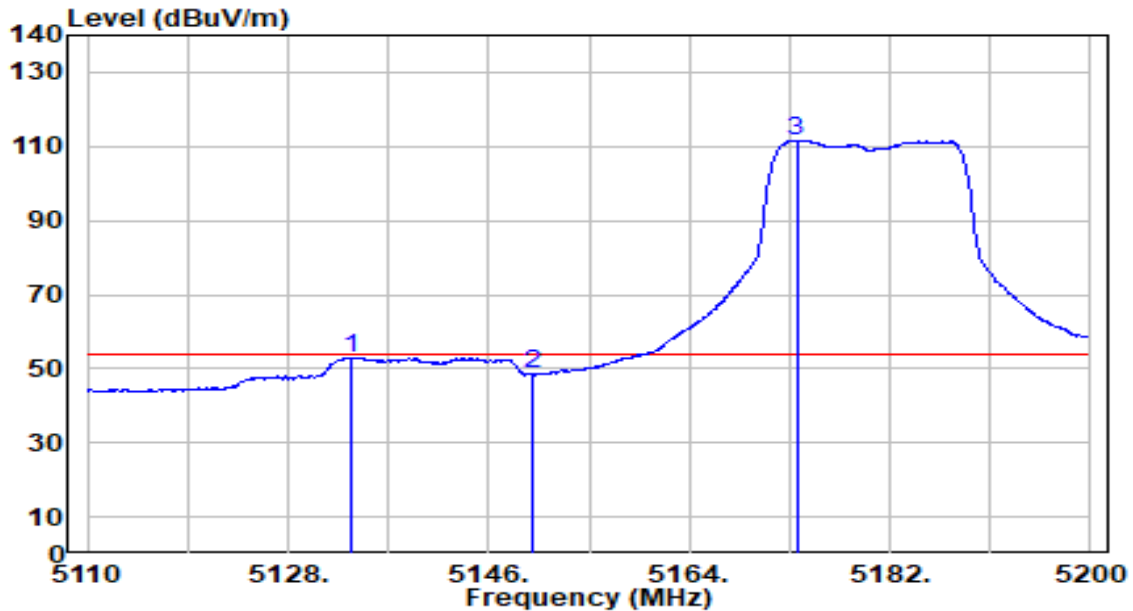


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5133.580	52.29	0.64	52.93	-1.07	54.00	167	178	Average
2		5150.000	47.85	0.65	48.50	-5.50	54.00	167	178	Average
3		5173.630	110.92	0.68	111.60	N/A	N/A	167	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

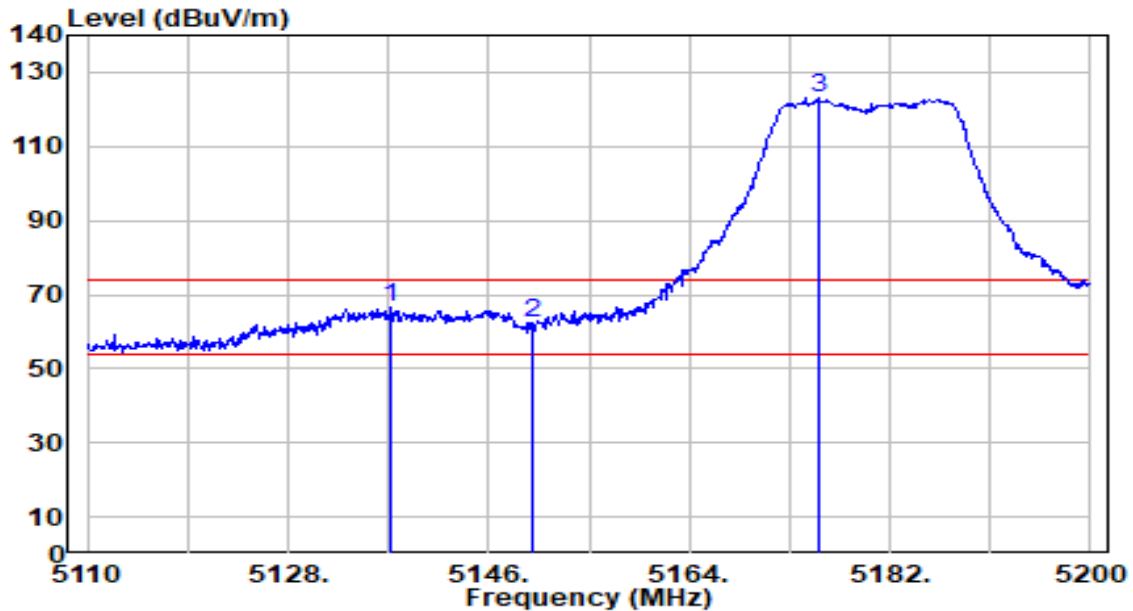


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.180	65.96	0.64	66.60	-7.40	74.00	158	180	Peak
2		5150.000	61.80	0.65	62.46	-11.54	74.00	158	180	Peak
3		5175.700	122.67	0.68	123.35	N/A	N/A	158	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

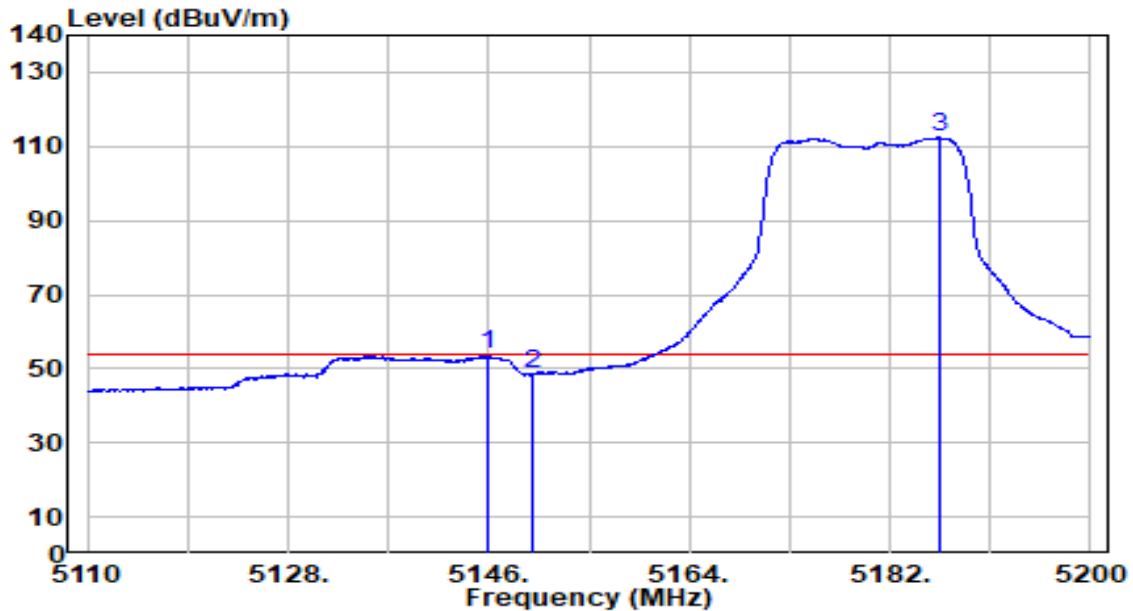


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.910	53.07	0.65	53.72	-0.28	54.00	158	180	Average
2		5150.000	47.82	0.65	48.48	-5.52	54.00	158	180	Average
3		5186.590	111.63	0.69	112.31	N/A	N/A	158	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

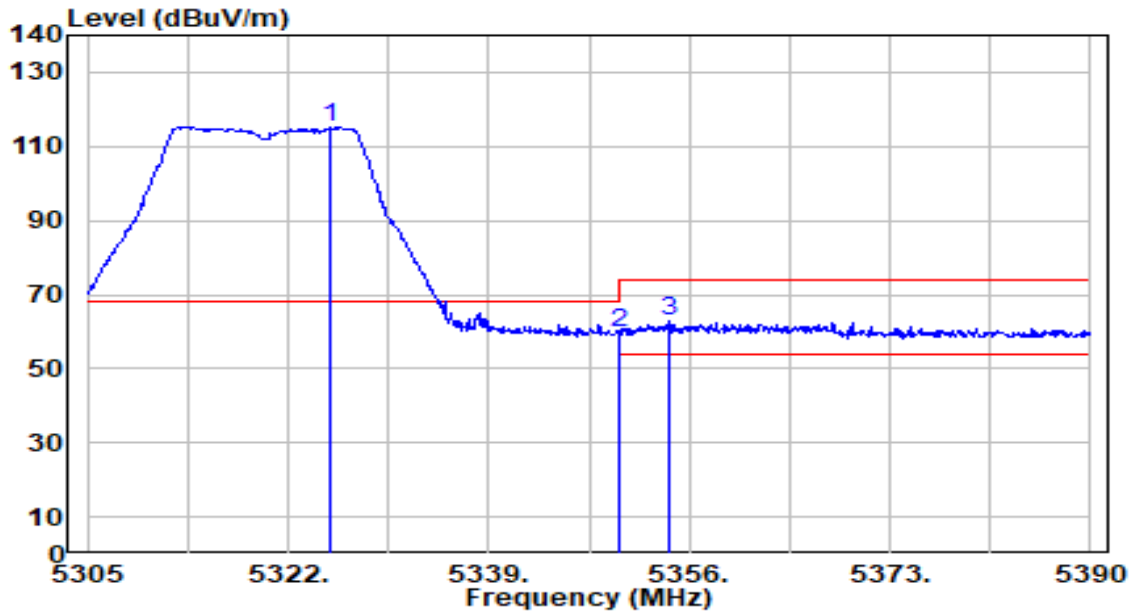


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.570	114.84	0.51	115.35	N/A	N/A	190	179	Peak
2	5350.000	58.97	0.47	59.44	-14.56	74.00	190	179	Peak
3	* 5354.385	62.32	0.46	62.78	-11.22	74.00	190	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

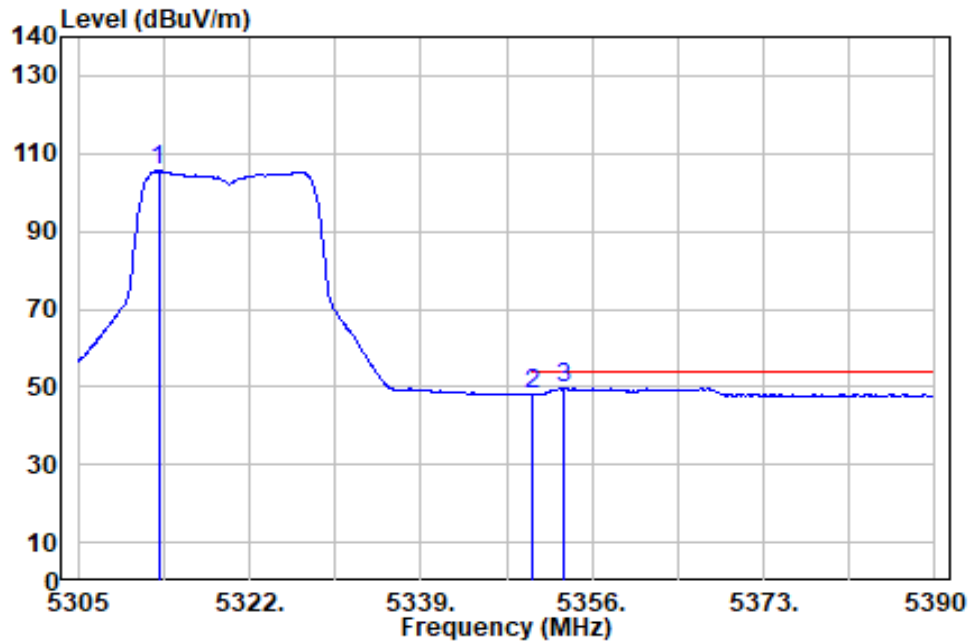


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.990	105.00	0.53	105.53	N/A	N/A	190	179	Average
2	5350.000	47.60	0.47	48.08	-5.92	54.00	190	179	Average
3	* 5353.280	49.22	0.47	49.69	-4.31	54.00	190	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

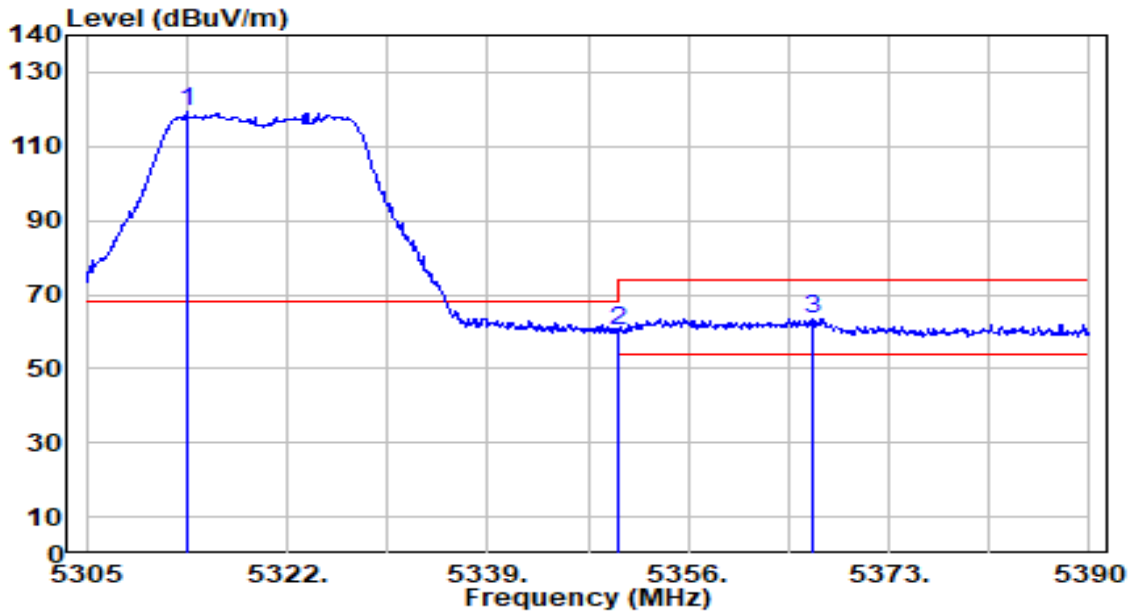


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.500	118.78	0.53	119.30	N/A	N/A	152	178	Peak
2	5350.000	59.89	0.47	60.36	-13.64	74.00	152	178	Peak
3	* 5366.455	63.17	0.45	63.62	-10.38	74.00	152	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

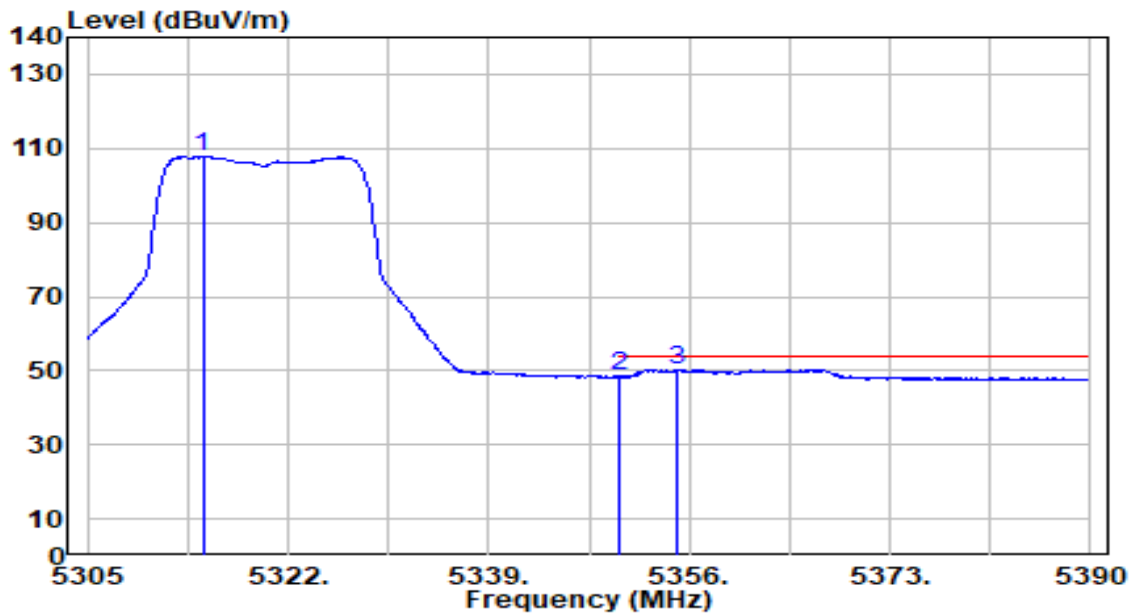


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.775	107.19	0.53	107.72	N/A	N/A	152	178	Average
2	5350.000	47.96	0.47	48.43	-5.57	54.00	152	178	Average
3	* 5354.980	49.76	0.46	50.22	-3.78	54.00	152	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

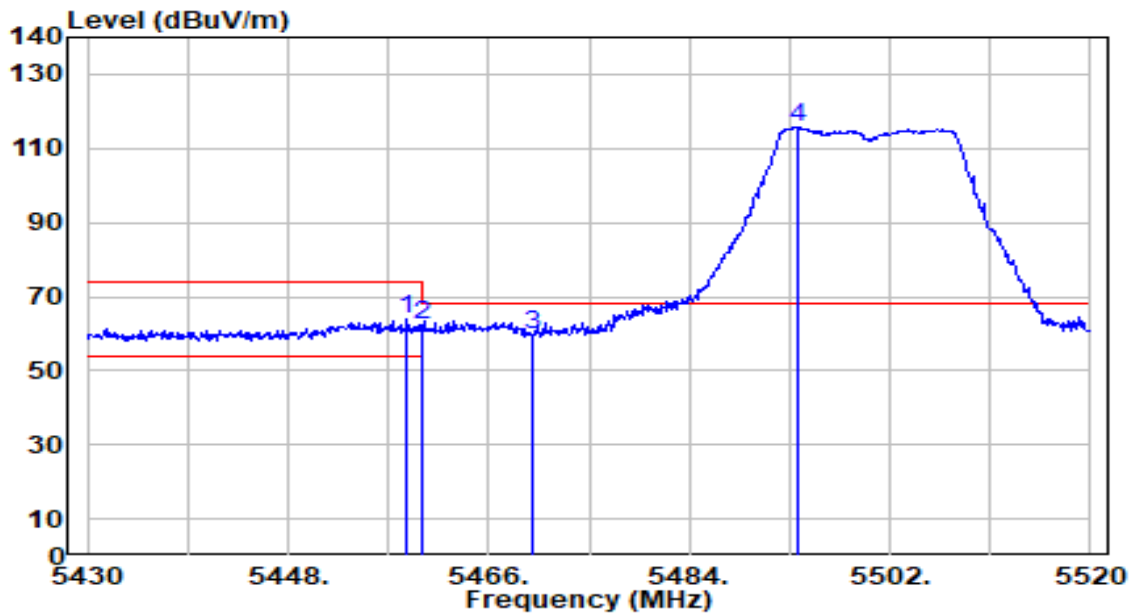


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.710	63.18	0.66	63.84	-10.16	74.00	198	186	Peak
2	5460.000	61.55	0.66	62.21	-11.79	74.00	198	186	Peak
3	* 5470.000	58.89	0.71	59.60	-8.60	68.20	198	186	Peak
4	5493.720	114.79	0.81	115.60	N/A	N/A	198	186	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

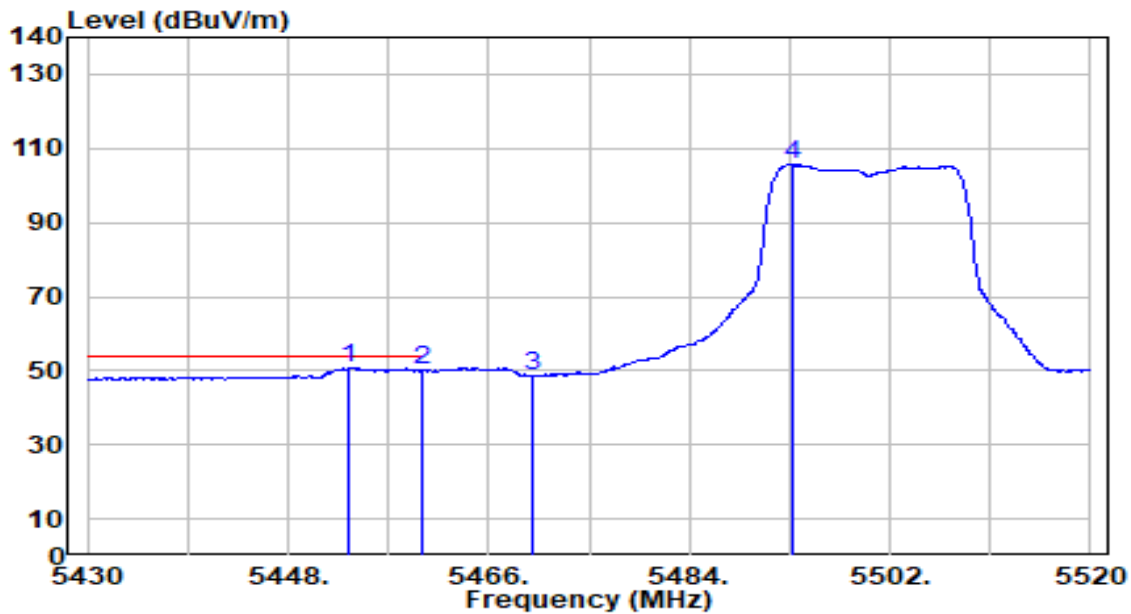


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.490	50.18	0.63	50.82	-3.18	54.00	198	186	Average
2		5460.000	49.38	0.66	50.04	-3.96	54.00	198	186	Average
3		5470.000	47.81	0.71	48.51	N/A	N/A	198	186	Average
4		5493.360	104.85	0.81	105.66	N/A	N/A	198	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

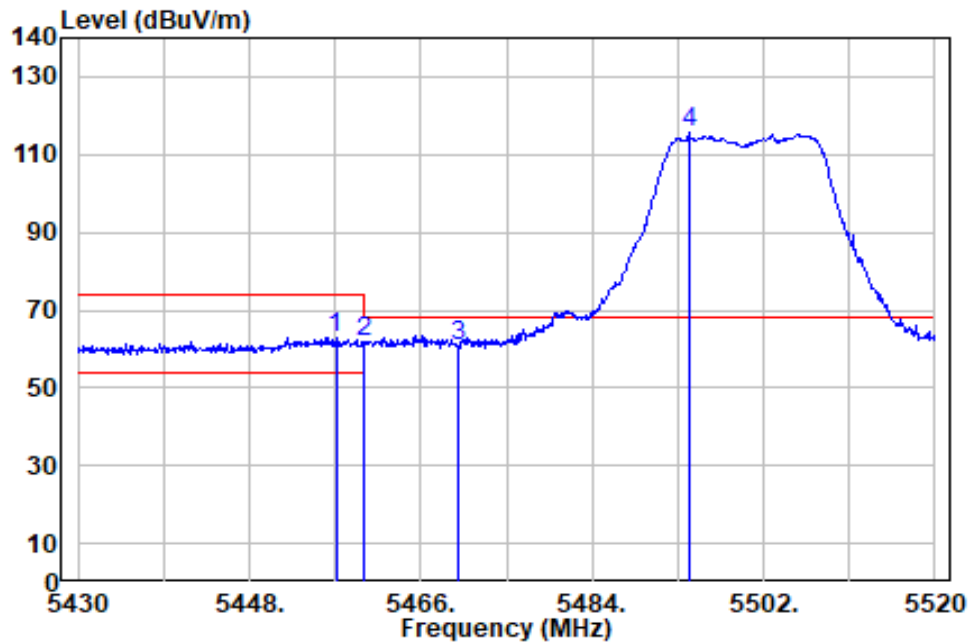

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.090	62.22	0.65	62.87	-11.13	74.00	161	184	Peak
2	5460.000	61.13	0.66	61.79	-12.21	74.00	161	184	Peak
3	* 5470.000	60.31	0.71	61.01	-7.19	68.20	161	184	Peak
4	5494.170	114.86	0.81	115.67	N/A	N/A	161	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.