


EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

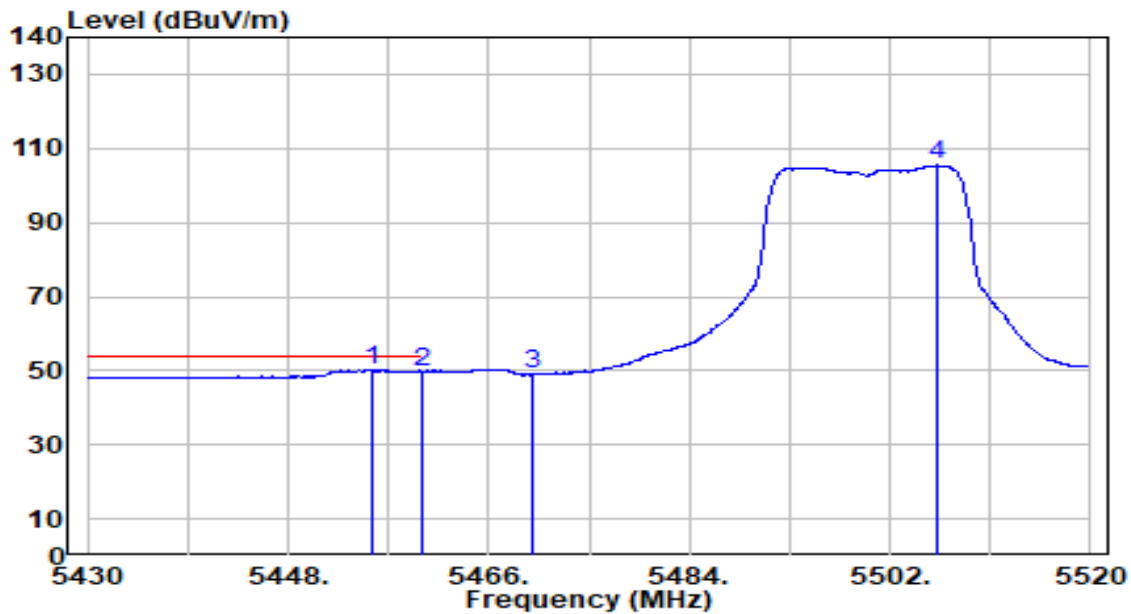


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.560	49.48	0.64	50.12	-3.88	54.00	161	184	Average
2		5460.000	49.03	0.66	49.69	-4.31	54.00	161	184	Average
3		5470.000	48.39	0.71	49.09	N/A	N/A	161	184	Average
4		5506.140	104.57	0.87	105.44	N/A	N/A	161	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

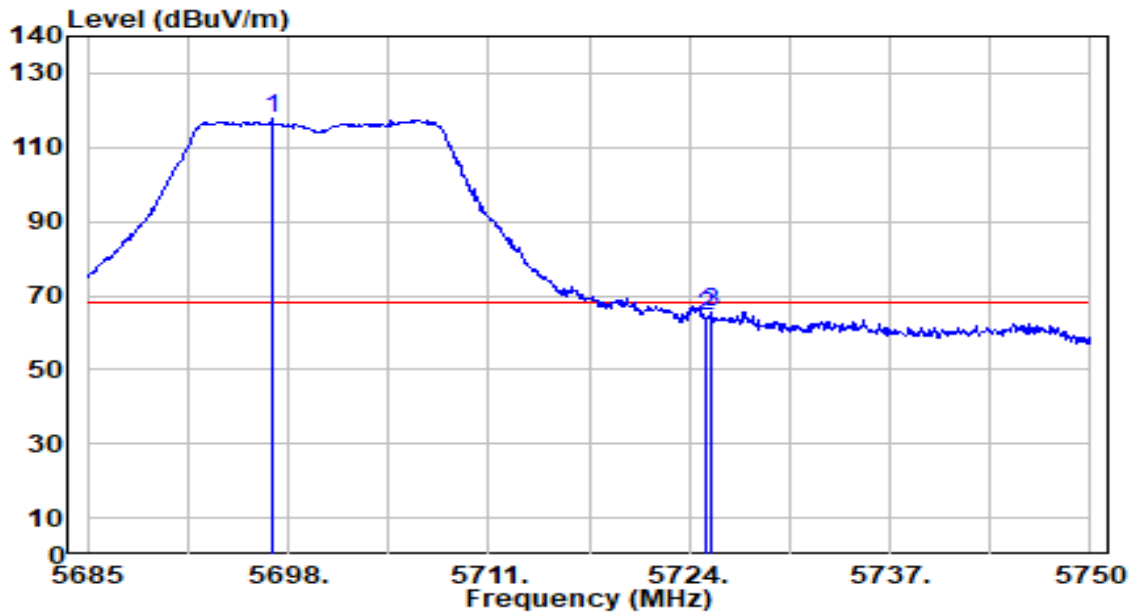


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5696.960	115.99	1.76	117.75	N/A	N/A	170	181	Peak
2	5725.000	62.37	1.89	64.26	-3.94	68.20	170	181	Peak
3	* 5725.430	63.55	1.90	65.45	-2.75	68.20	170	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

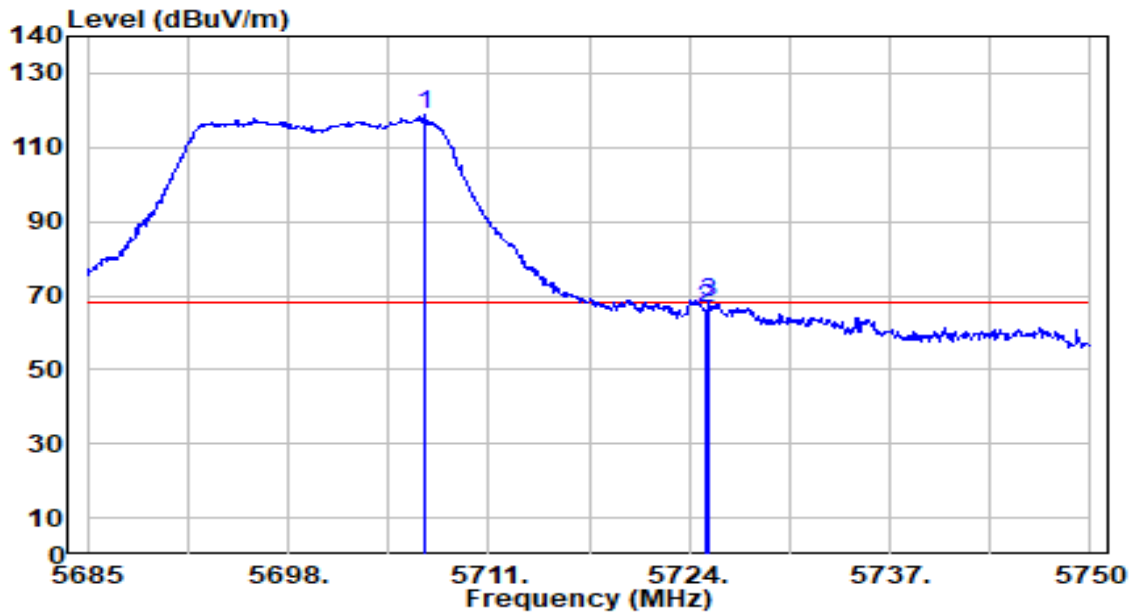


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.840	117.13	1.81	118.93	N/A	N/A	193	185	Peak
2	5725.000	64.57	1.89	66.46	-1.74	68.20	193	185	Peak
3	* 5725.300	66.19	1.89	68.09	-0.11	68.20	193	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

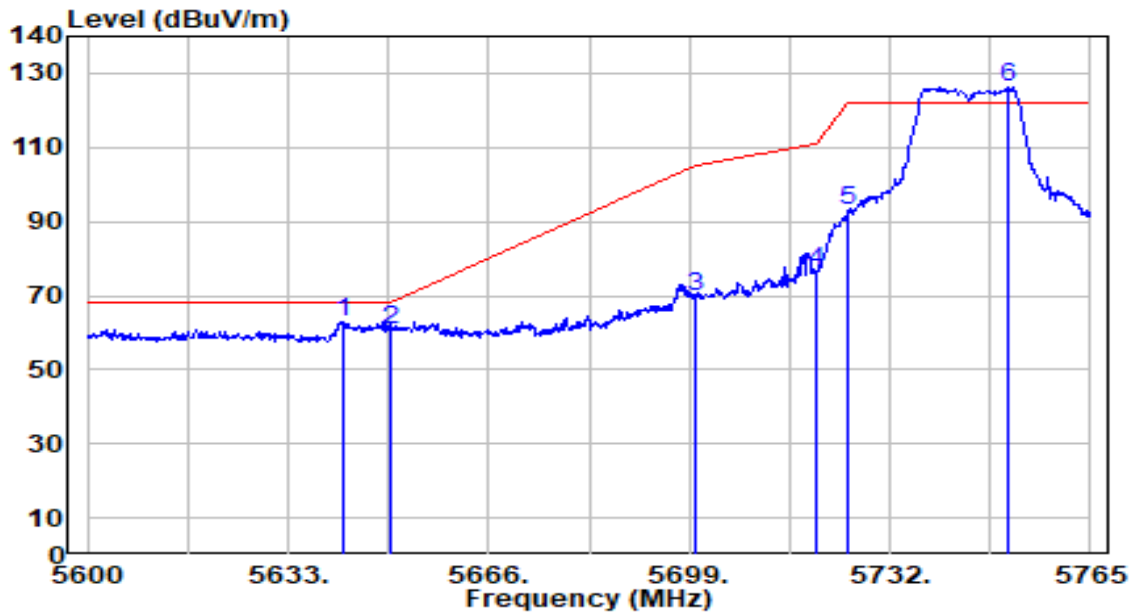


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.910	61.52	1.50	63.03	-5.17	68.20	200	182	Peak
2		5650.000	59.05	1.54	60.59	-7.61	68.20	200	182	Peak
3		5700.000	67.98	1.78	69.75	-35.45	105.20	200	182	Peak
4		5720.000	74.94	1.87	76.81	-33.99	110.80	200	182	Peak
5		5725.000	91.09	1.89	92.98	-29.22	122.20	200	182	Peak
6		5751.470	124.10	2.02	126.12	N/A	N/A	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

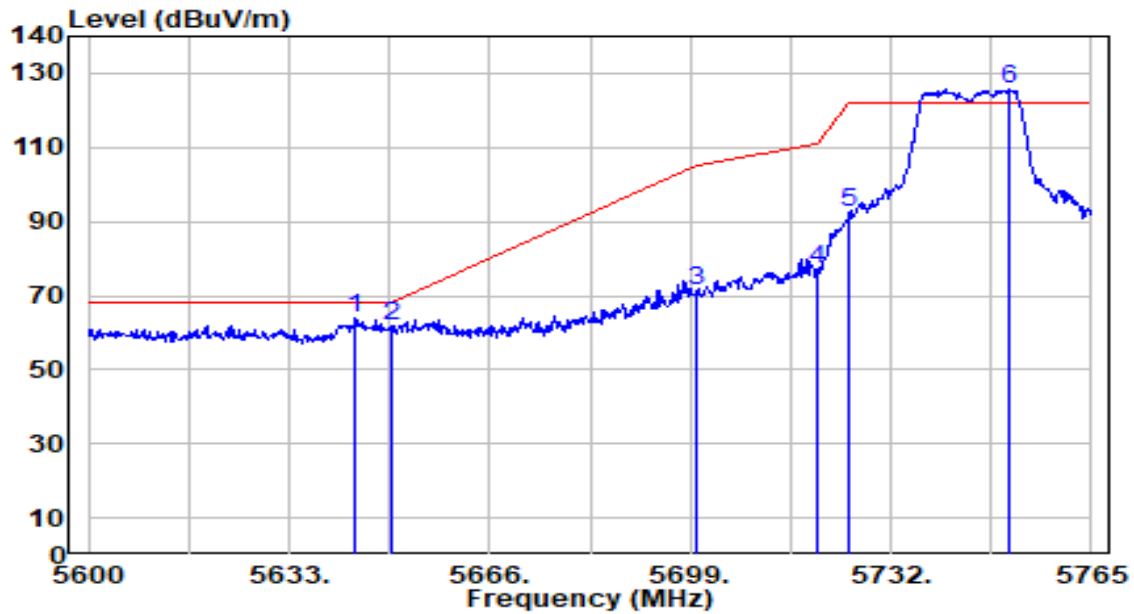


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.890	62.30	1.51	63.82	-4.38	68.20	200	178	Peak
2		5650.000	60.02	1.54	61.56	-6.64	68.20	200	178	Peak
3		5700.000	69.33	1.78	71.10	-34.10	105.20	200	178	Peak
4		5720.000	75.36	1.87	77.23	-33.57	110.80	200	178	Peak
5		5725.000	90.43	1.89	92.32	-29.88	122.20	200	178	Peak
6		5751.305	123.88	2.02	125.90	N/A	N/A	200	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

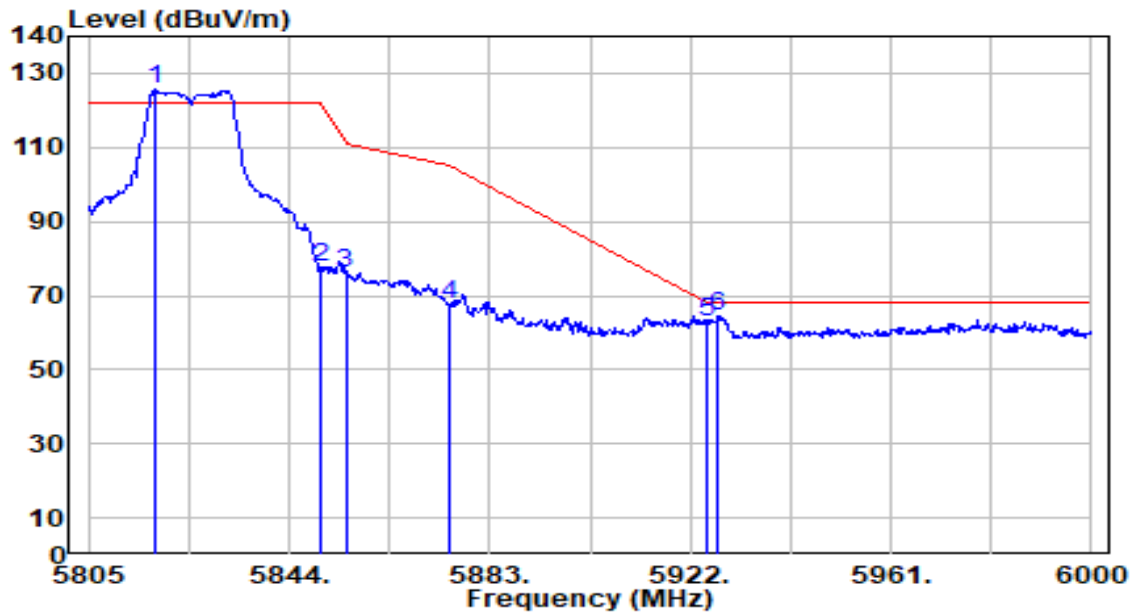


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5818.065	123.23	2.25	125.48	N/A	N/A	200	182	Peak
2	5850.000	75.18	2.25	77.44	-44.76	122.20	200	182	Peak
3	5855.000	73.74	2.25	75.99	-34.81	110.80	200	182	Peak
4	5875.000	65.20	2.26	67.46	-37.74	105.20	200	182	Peak
5	5925.000	60.83	2.27	63.10	-5.10	68.20	200	182	Peak
6	* 5927.460	62.36	2.27	64.62	-3.58	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

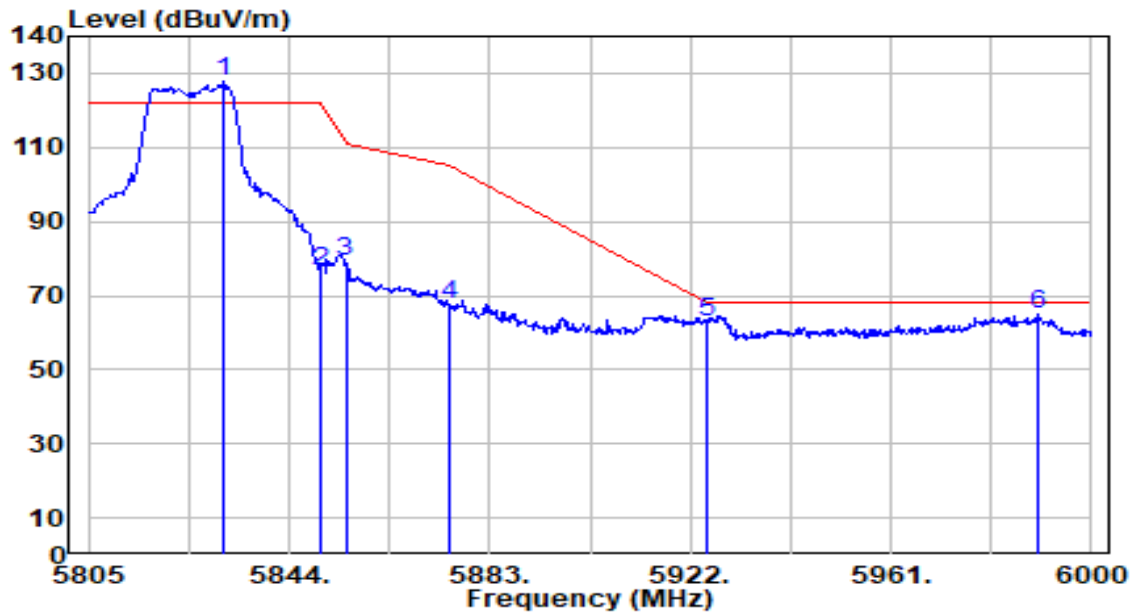


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5831.325	125.37	2.25	127.62	N/A	N/A	200	192	Peak
2	5850.000	74.44	2.25	76.69	-45.51	122.20	200	192	Peak
3	5855.000	77.14	2.25	79.40	-31.40	110.80	200	192	Peak
4	5875.000	65.56	2.26	67.82	-37.38	105.20	200	192	Peak
5	5925.000	60.78	2.27	63.04	-5.16	68.20	200	192	Peak
6	* 5989.470	62.53	2.28	64.81	-3.39	68.20	200	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

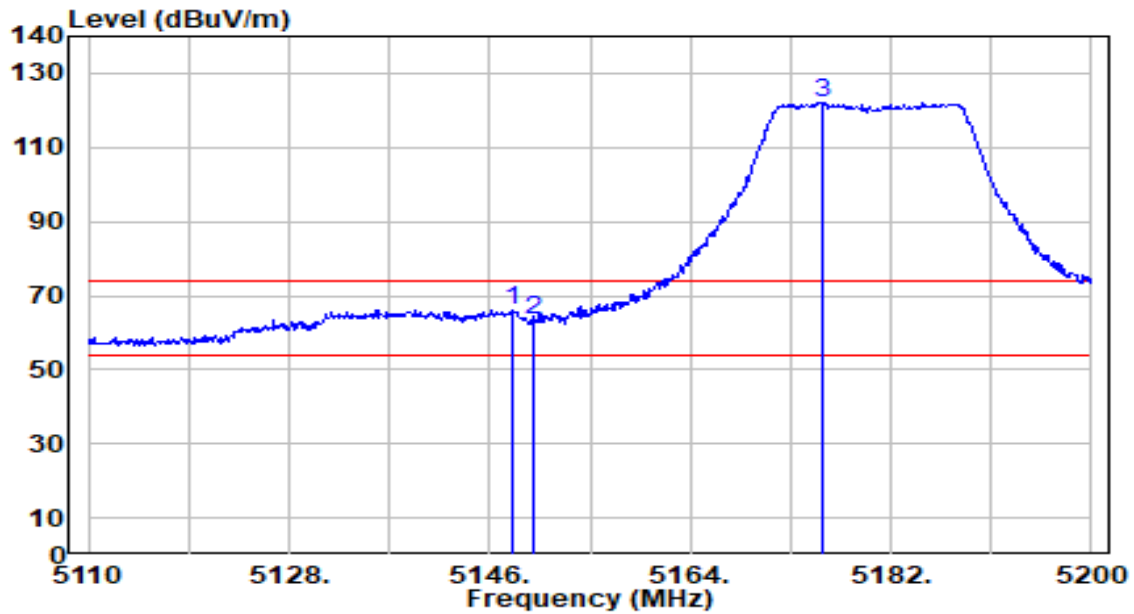


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.980	65.59	0.65	66.24	-7.76	74.00	167	178	Peak
2		5150.000	62.69	0.65	63.35	-10.65	74.00	167	178	Peak
3		5175.790	121.55	0.68	122.23	N/A	N/A	167	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

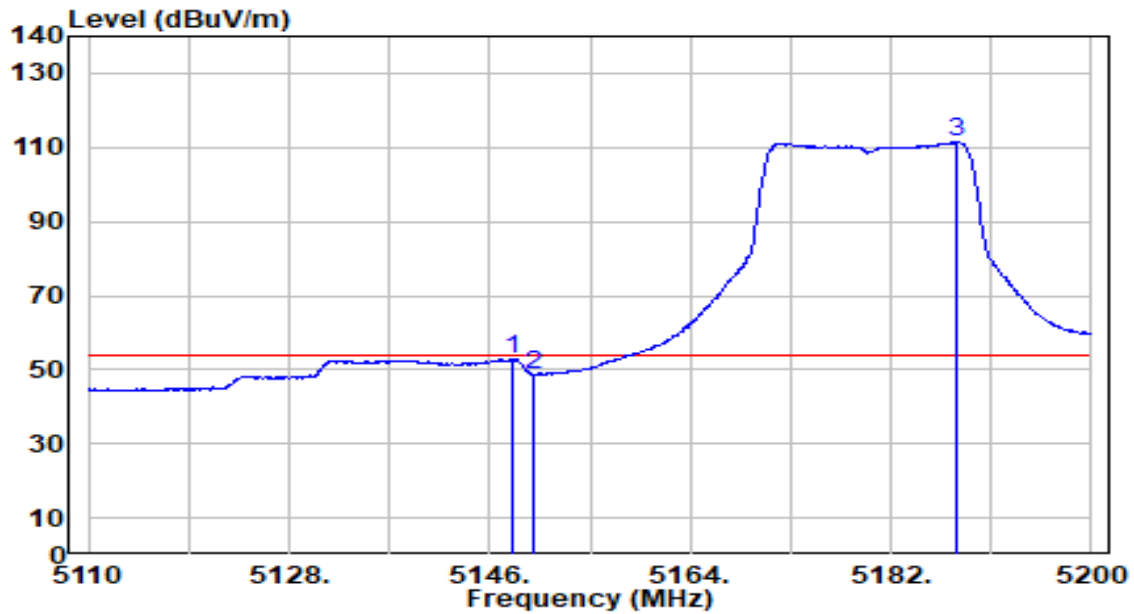


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.070	52.21	0.65	52.87	-1.13	54.00	167	178	Average
2		5150.000	47.96	0.65	48.62	-5.38	54.00	167	178	Average
3		5187.940	110.74	0.69	111.43	N/A	N/A	167	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

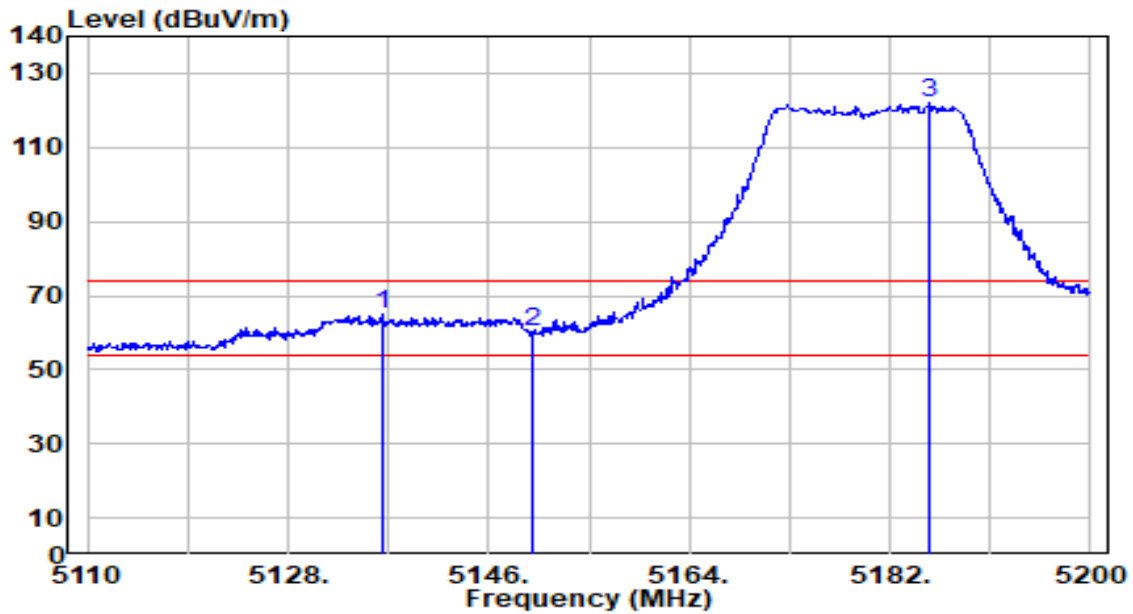


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5136.550	64.48	0.64	65.12	-8.88	74.00	158	180	Peak
2		5150.000	59.70	0.65	60.35	-13.65	74.00	158	180	Peak
3		5185.510	121.15	0.69	121.83	N/A	N/A	158	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

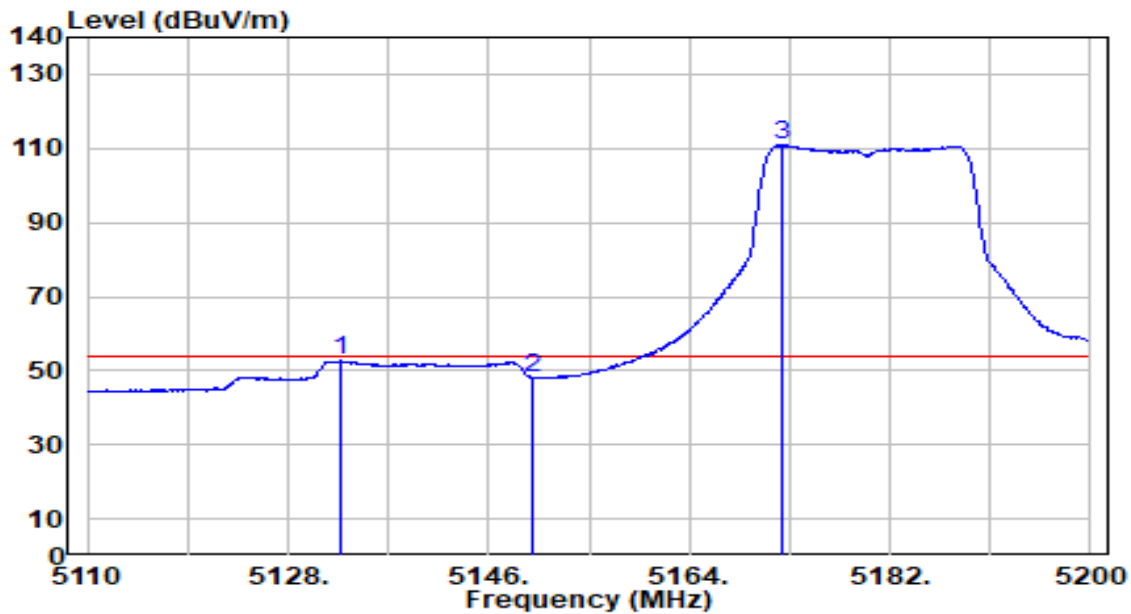


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5132.770	51.93	0.64	52.57	-1.43	54.00	158	180	Average
2		5150.000	47.45	0.65	48.10	-5.90	54.00	158	180	Average
3		5172.280	110.07	0.68	110.75	N/A	N/A	158	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplicifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

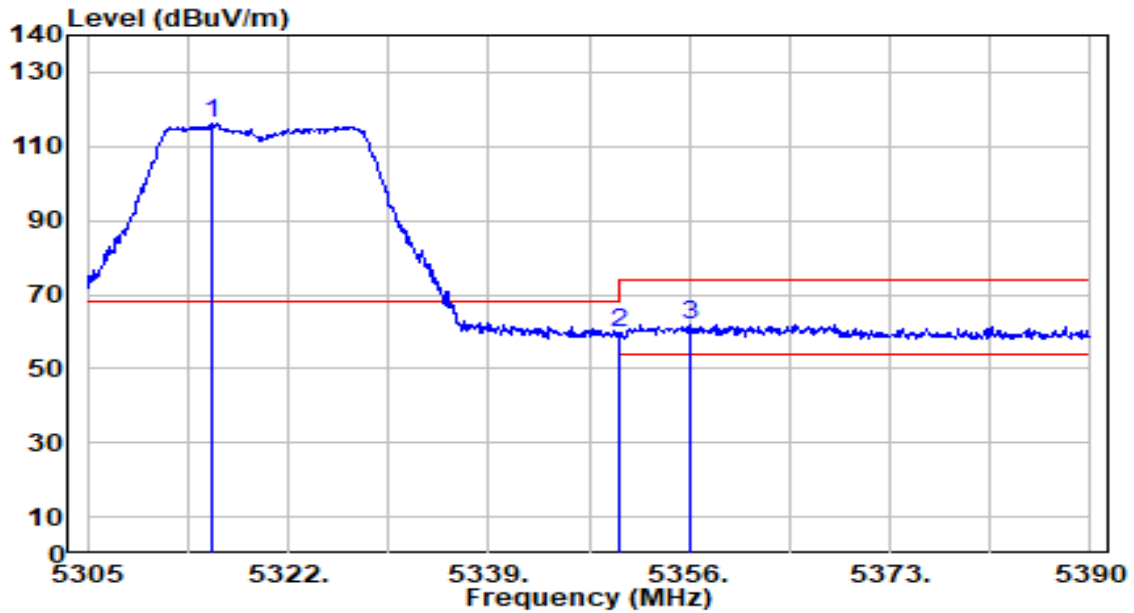


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.455	115.65	0.52	116.17	N/A	N/A	190	179	Peak
2	5350.000	59.34	0.47	59.81	-14.19	74.00	190	179	Peak
3	* 5356.000	61.48	0.46	61.94	-12.06	74.00	190	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

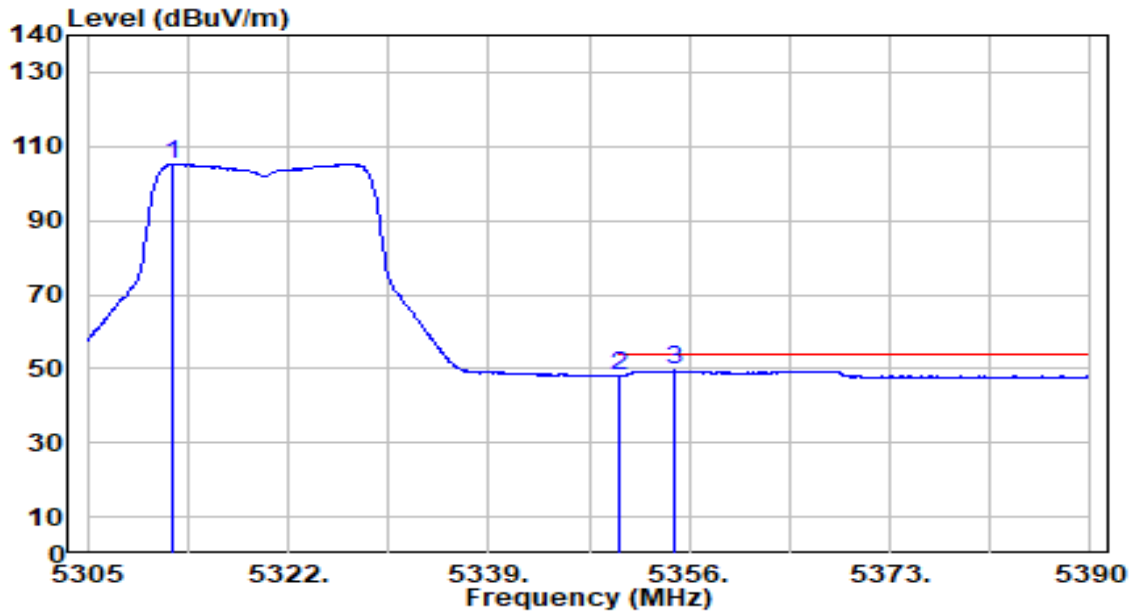


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.310	104.75	0.53	105.28	N/A	N/A	190	179	Average
2	5350.000	47.52	0.47	48.00	-6.00	54.00	190	179	Average
3	* 5354.725	48.99	0.46	49.45	-4.55	54.00	190	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

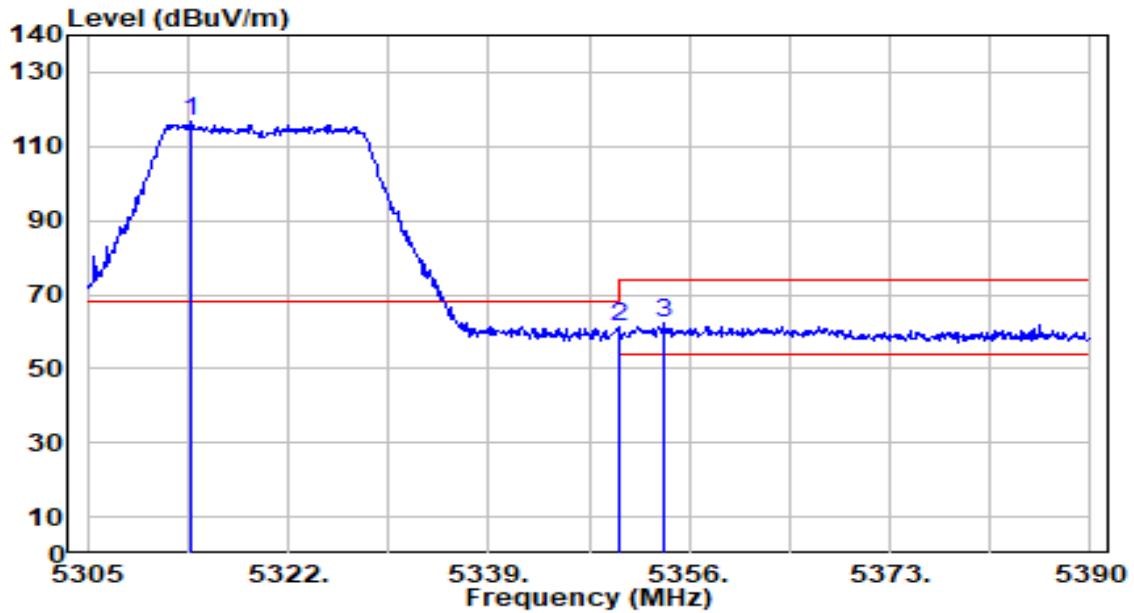


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.670	116.37	0.53	116.90	N/A	N/A	152	178	Peak
2	5350.000	61.07	0.47	61.54	-12.46	74.00	152	178	Peak
3	* 5353.790	61.97	0.47	62.43	-11.57	74.00	152	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-10
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

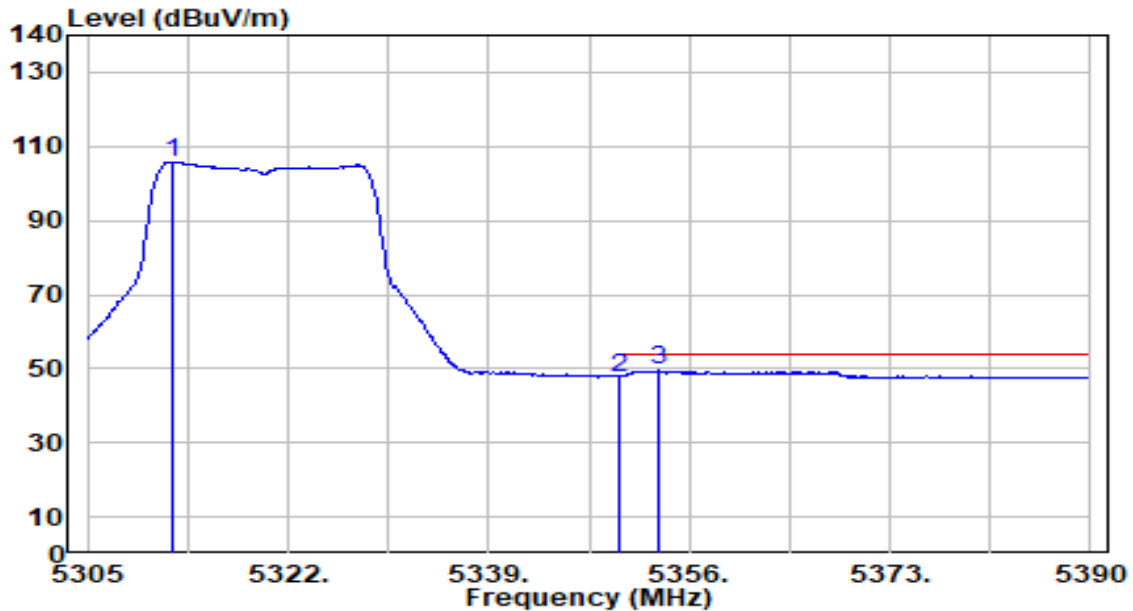


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.310	105.18	0.53	105.71	N/A	N/A	152	178	Average
2	5350.000	47.31	0.47	47.78	-6.22	54.00	152	178	Average
3	* 5353.365	48.96	0.47	49.42	-4.58	54.00	152	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

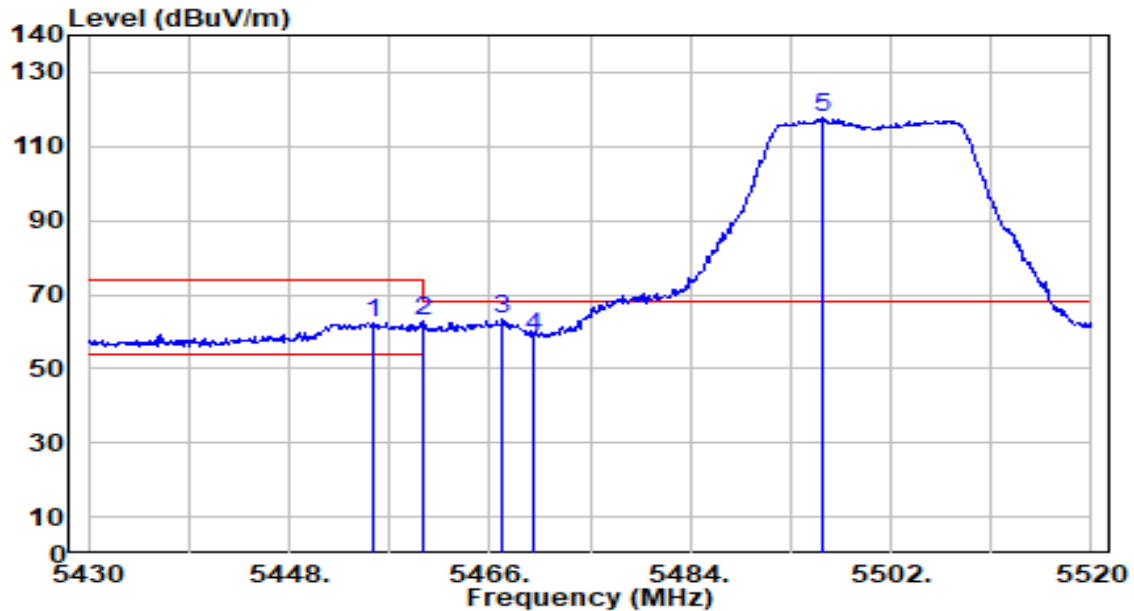


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.560	61.88	0.64	62.53	-11.47	74.00	198	186	Peak
2	5460.000	62.20	0.66	62.87	-11.13	74.00	198	186	Peak
3	* 5467.170	62.47	0.69	63.17	-5.03	68.20	198	186	Peak
4	5470.000	58.00	0.71	58.71	-9.49	68.20	198	186	Peak
5	5495.880	117.12	0.82	117.94	N/A	N/A	198	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

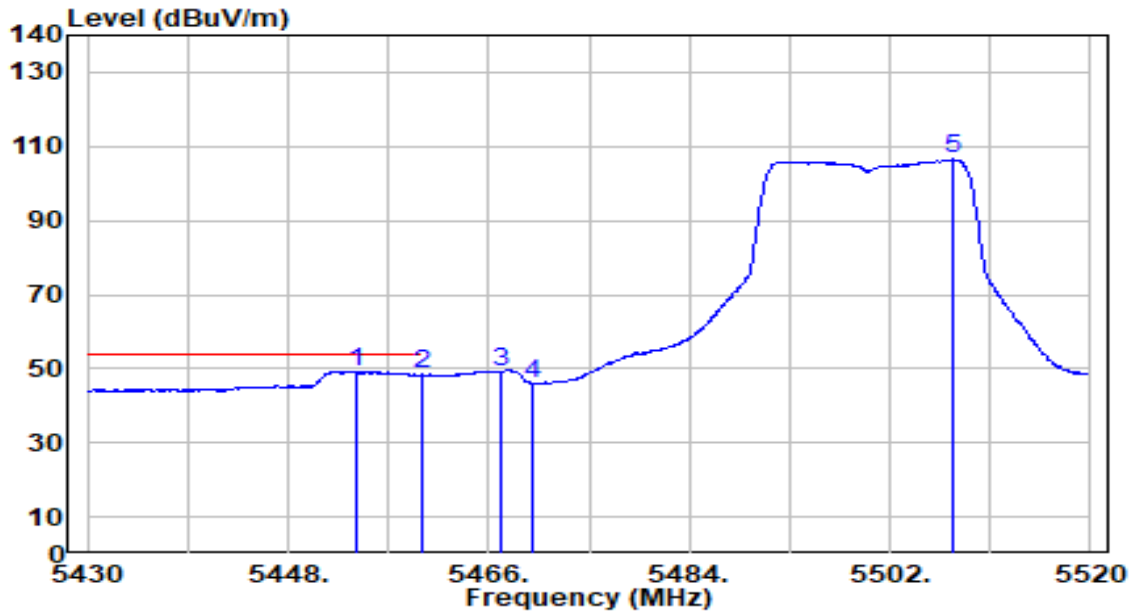


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.030	48.66	0.63	49.29	-4.71	54.00	198	186	Average
2		5460.000	47.70	0.66	48.36	-5.64	54.00	198	186	Average
3		5467.170	48.66	0.69	49.35	N/A	N/A	198	186	Average
4		5470.000	45.06	0.71	45.76	N/A	N/A	198	186	Average
5		5507.670	105.59	0.88	106.47	N/A	N/A	198	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

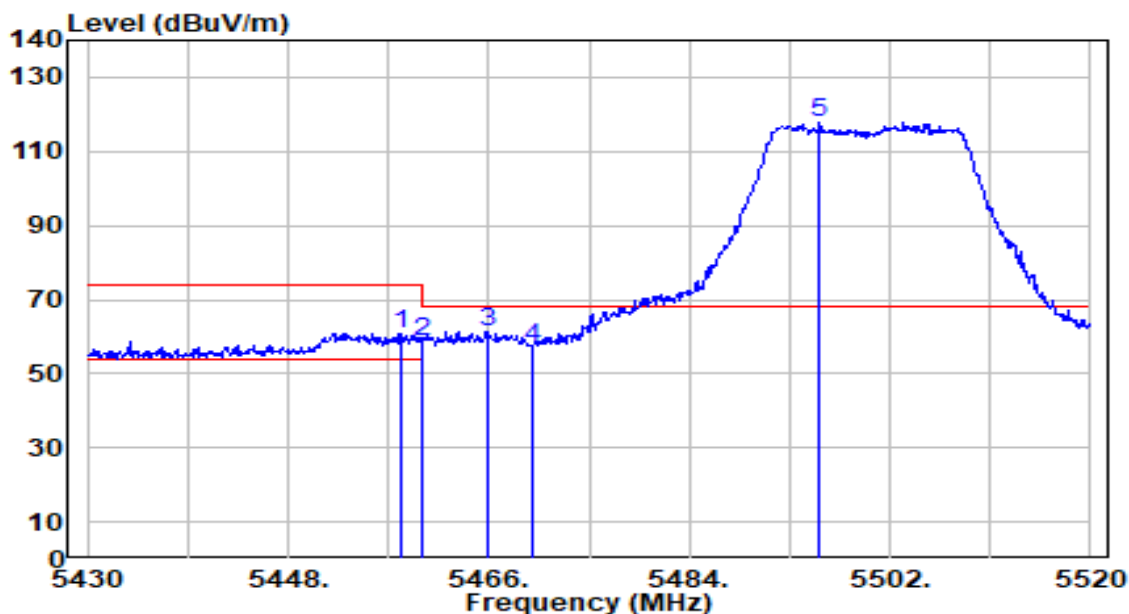


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.080	60.16	0.65	60.81	-13.19	74.00	161	184	Peak
2	5460.000	57.98	0.66	58.64	-15.36	74.00	161	184	Peak
3	* 5465.820	60.82	0.69	61.51	-6.69	68.20	161	184	Peak
4	5470.000	56.19	0.71	56.89	-11.31	68.20	161	184	Peak
5	5495.700	117.00	0.82	117.82	N/A	N/A	161	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

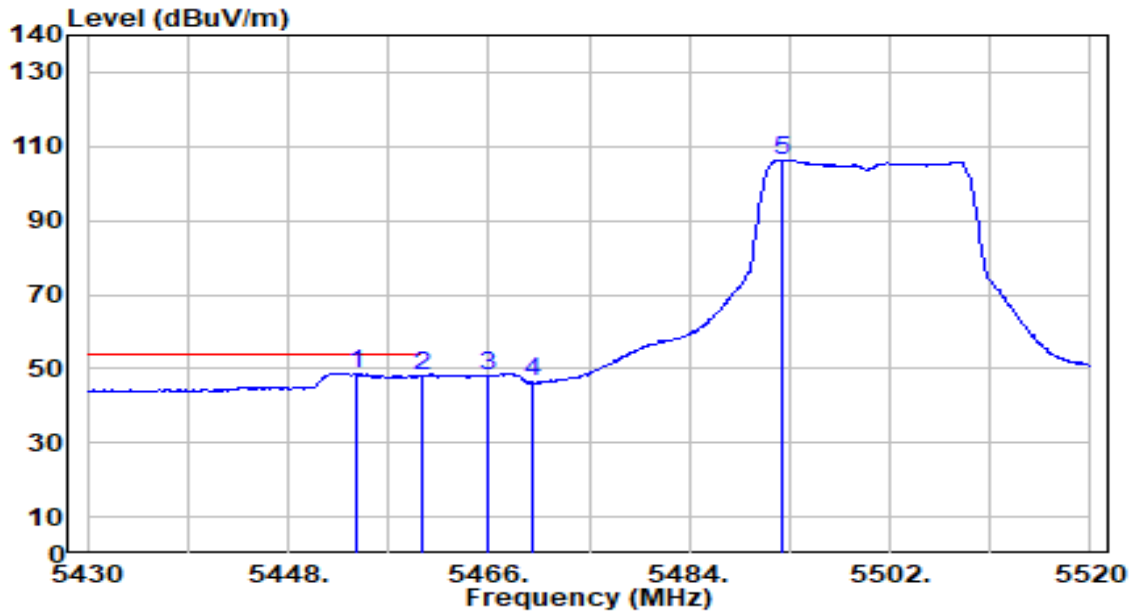


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.030	48.14	0.63	48.77	-5.23	54.00	161	184	Average
2		5460.000	47.19	0.66	47.86	-6.14	54.00	161	184	Average
3		5465.820	47.49	0.69	48.18	N/A	N/A	161	184	Average
4		5470.000	45.57	0.71	46.28	N/A	N/A	161	184	Average
5		5492.280	105.64	0.81	106.45	N/A	N/A	161	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

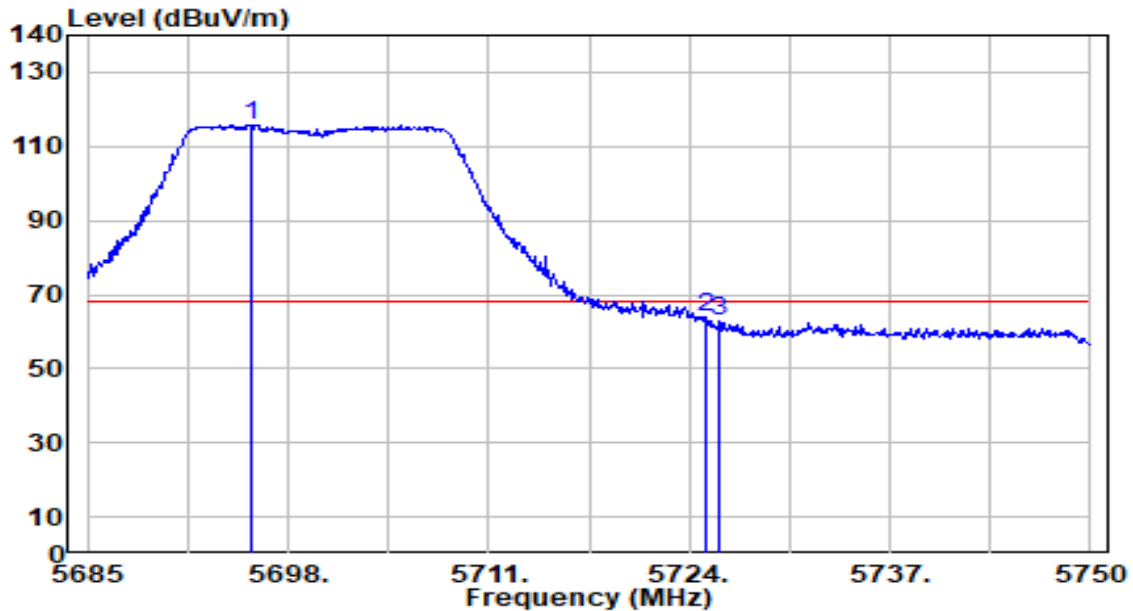


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5695.595	114.15	1.76	115.91	N/A	N/A	170	181	Peak
2	*	5725.000	62.11	1.89	64.00	-4.20	68.20	170	181	Peak
3		5725.950	61.17	1.90	63.07	-5.13	68.20	170	181	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

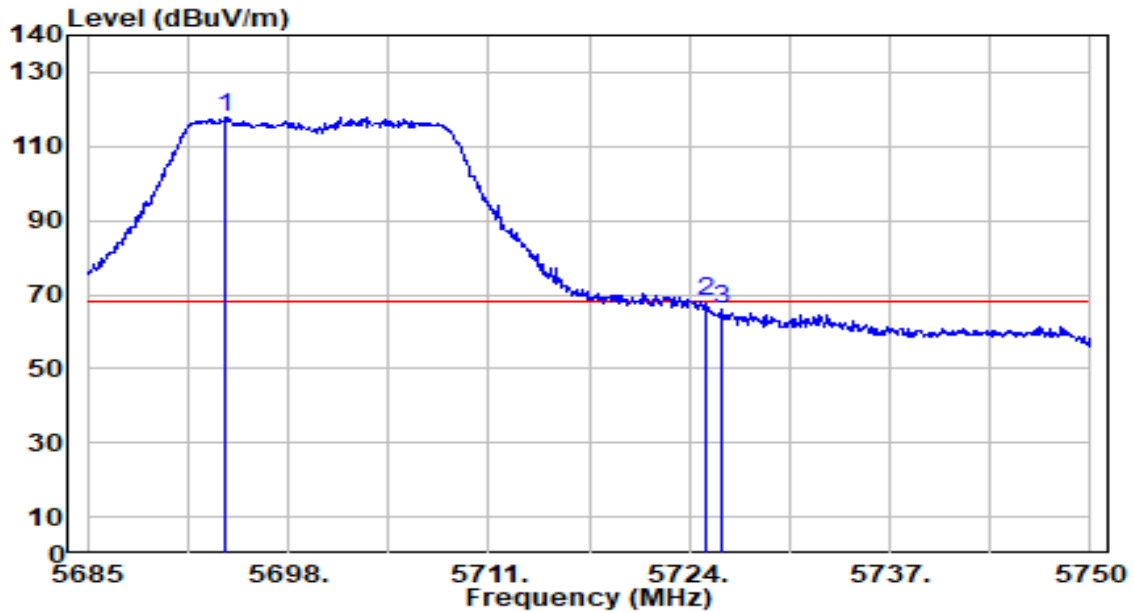


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5693.970	115.92	1.75	117.67	N/A	N/A	193	185	Peak
2	*	5725.000	66.02	1.89	67.91	-0.29	68.20	193	185	Peak
3		5726.080	64.34	1.90	66.24	-1.96	68.20	193	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

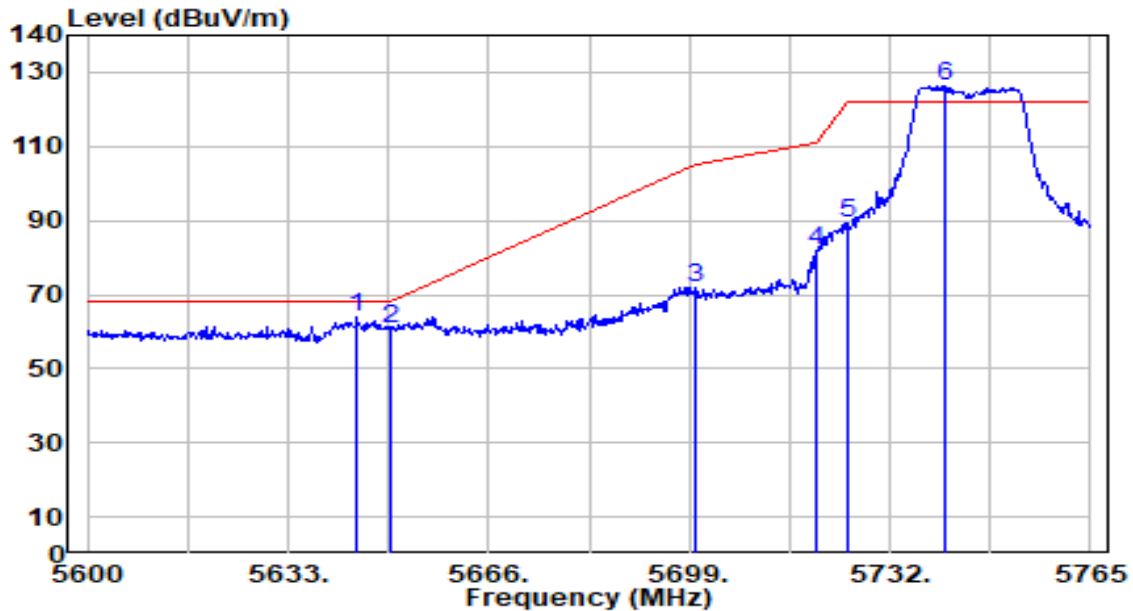


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.220	62.28	1.51	63.79	-4.41	68.20	200	182	Peak
2		5650.000	59.38	1.54	60.92	-7.28	68.20	200	182	Peak
3		5700.000	69.86	1.78	71.64	-33.56	105.20	200	182	Peak
4		5720.000	80.06	1.87	81.93	-28.87	110.80	200	182	Peak
5		5725.000	87.19	1.89	89.08	-33.12	122.20	200	182	Peak
6		5740.910	124.23	1.97	126.20	N/A	N/A	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

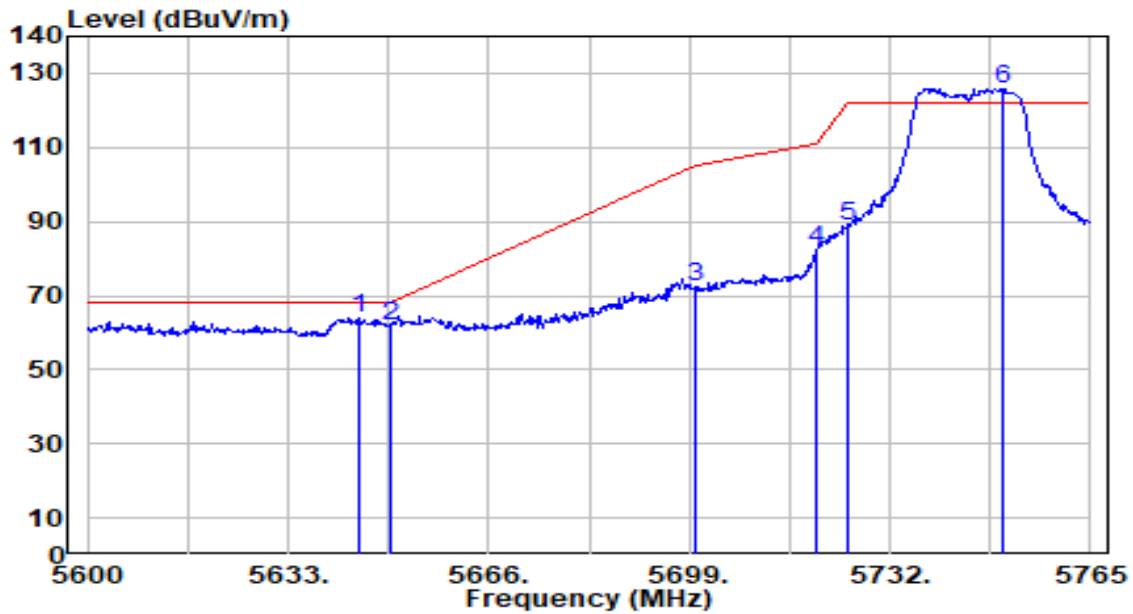


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.550	62.55	1.52	64.07	-4.13	68.20	200	178	Peak
2		5650.000	60.43	1.54	61.97	-6.23	68.20	200	178	Peak
3		5700.000	70.40	1.78	72.18	-33.02	105.20	200	178	Peak
4		5720.000	80.56	1.87	82.43	-28.37	110.80	200	178	Peak
5		5725.000	86.62	1.89	88.51	-33.69	122.20	200	178	Peak
6		5750.645	123.78	2.01	125.79	N/A	N/A	200	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

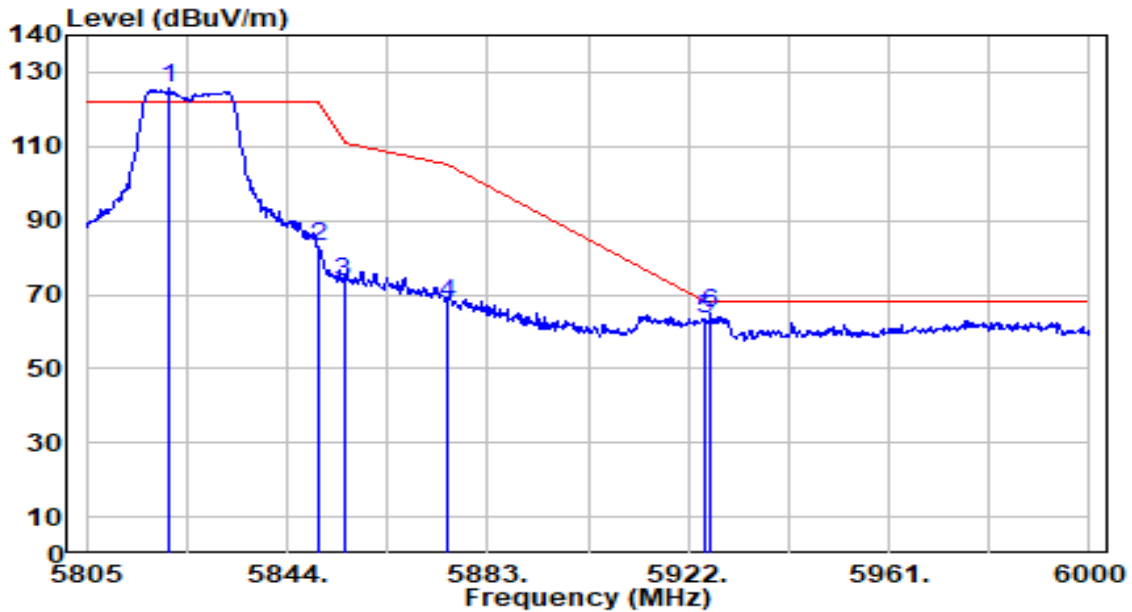


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.990	123.29	2.25	125.54	N/A	N/A	200	182	Peak
2	5850.000	80.80	2.25	83.05	-39.15	122.20	200	182	Peak
3	5855.000	71.20	2.25	73.45	-37.35	110.80	200	182	Peak
4	5875.000	65.14	2.26	67.40	-37.80	105.20	200	182	Peak
5	5925.000	60.93	2.27	63.20	-5.00	68.20	200	182	Peak
6	* 5926.485	62.68	2.27	64.95	-3.25	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

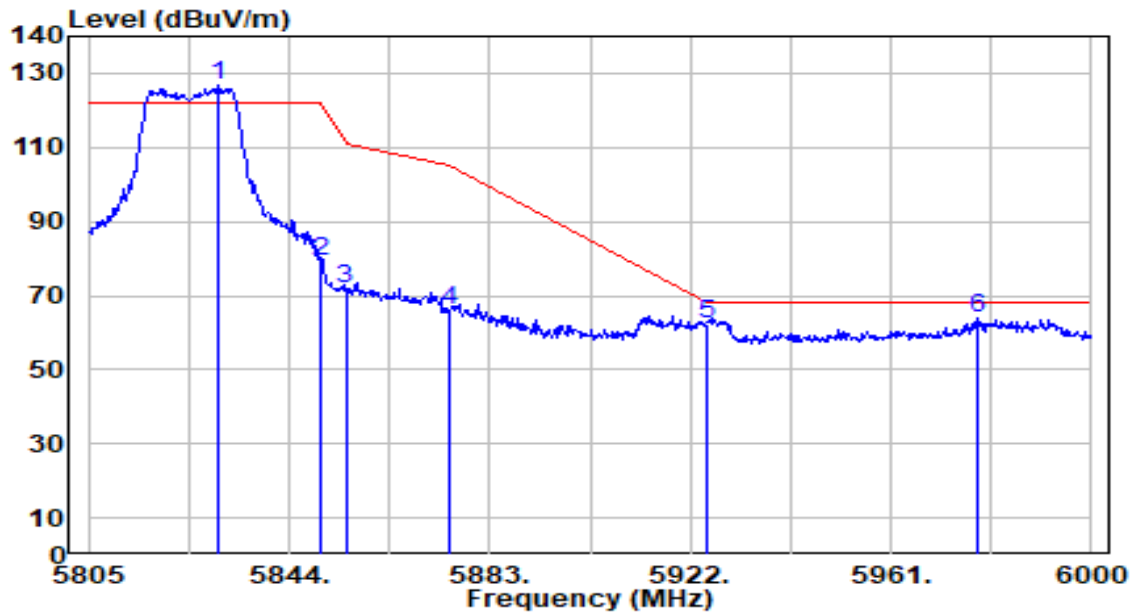


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5830.155	124.36	2.25	126.61	N/A	N/A	200	192	Peak
2	5850.000	76.81	2.25	79.06	-43.14	122.20	200	192	Peak
3	5855.000	69.56	2.25	71.81	-38.99	110.80	200	192	Peak
4	5875.000	63.92	2.26	66.18	-39.02	105.20	200	192	Peak
5	5925.000	59.84	2.27	62.11	-6.09	68.20	200	192	Peak
6	* 5977.770	61.60	2.28	63.88	-4.32	68.20	200	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

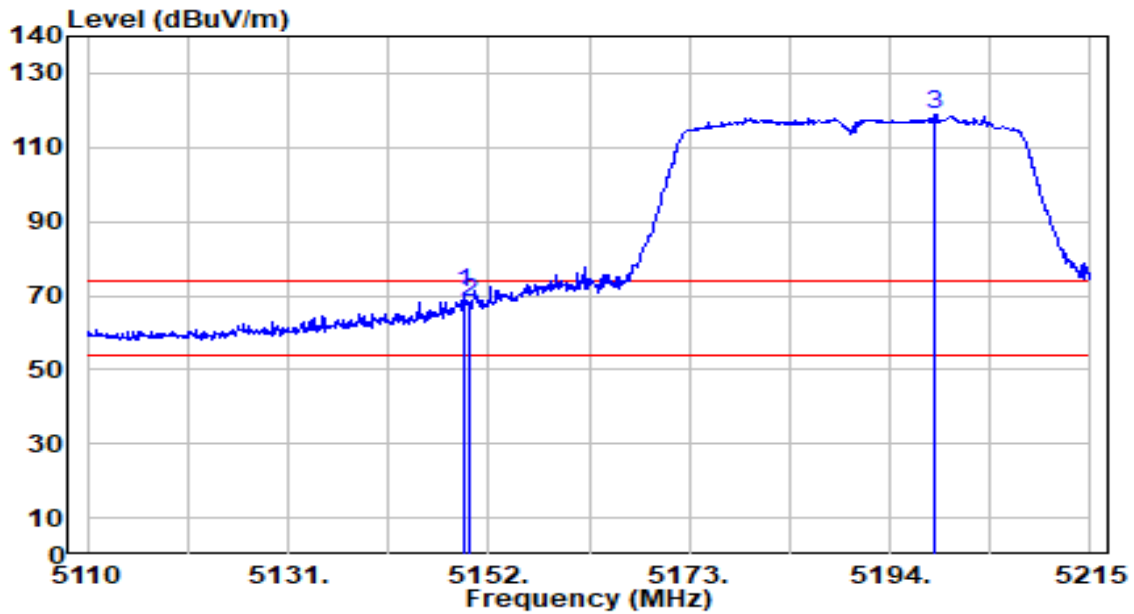


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.375	70.38	0.65	71.03	-2.97	74.00	167	178	Peak
2		5150.000	67.50	0.65	68.16	-5.84	74.00	167	178	Peak
3		5198.725	118.41	0.70	119.11	N/A	N/A	167	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

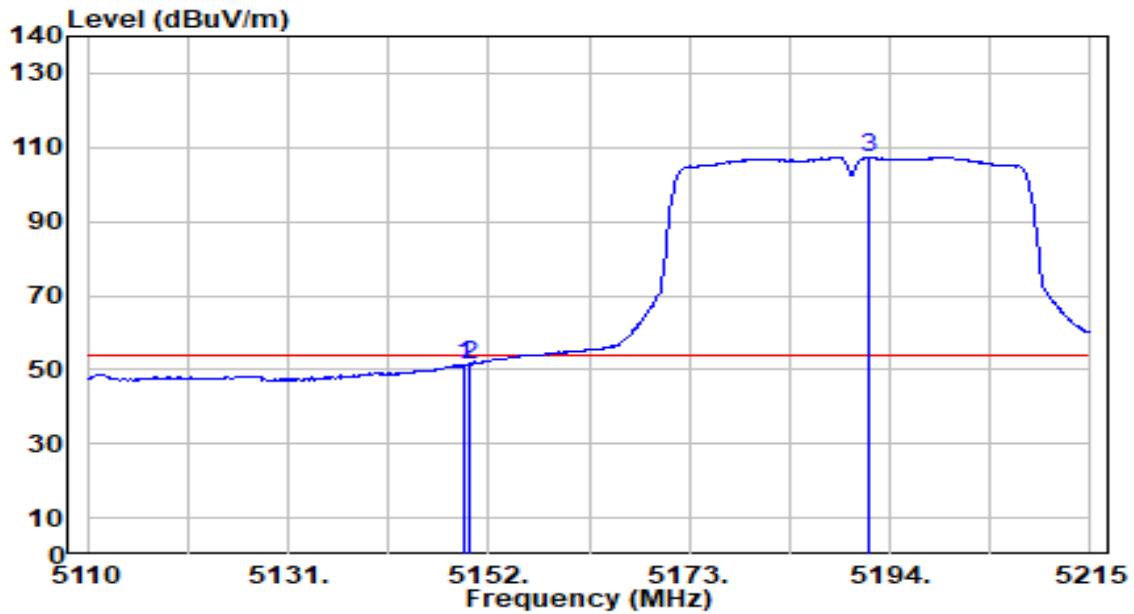


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.375	50.70	0.65	51.36	-2.64	54.00	167	178	Average
2	*	5150.000	50.83	0.65	51.49	-2.51	54.00	167	178	Average
3		5191.690	106.65	0.69	107.34	N/A	N/A	167	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

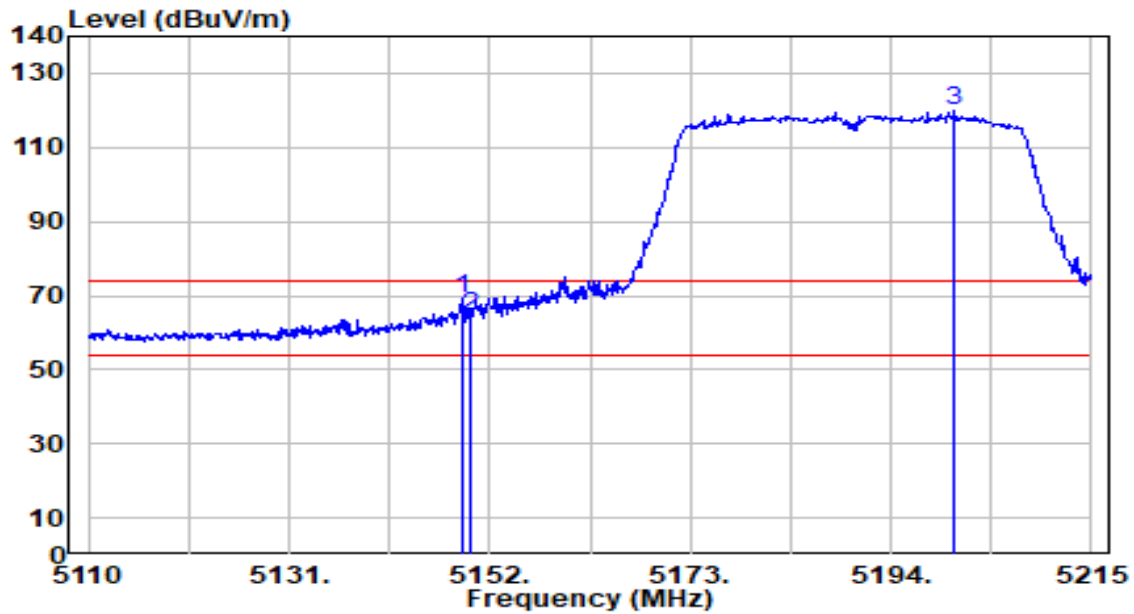


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.270	68.40	0.65	69.06	-4.94	74.00	158	180	Peak
2		5150.000	63.89	0.65	64.55	-9.45	74.00	158	180	Peak
3		5200.615	118.98	0.70	119.68	N/A	N/A	158	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

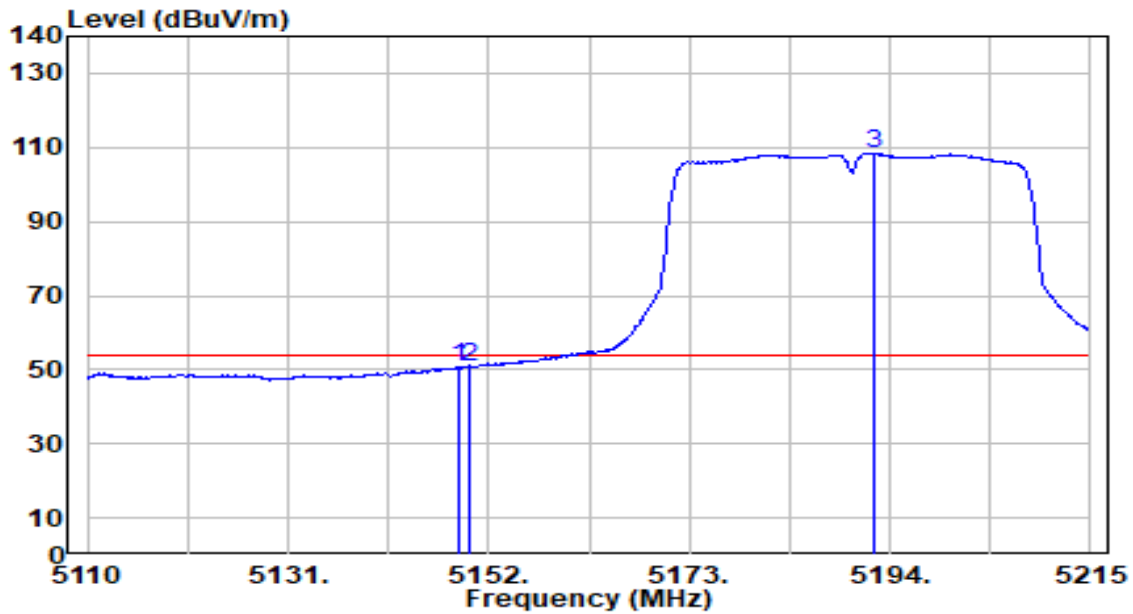


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.955	49.98	0.65	50.64	-3.36	54.00	158	180	Average
2	*	5150.000	50.14	0.65	50.80	-3.20	54.00	158	180	Average
3		5192.320	107.66	0.69	108.35	N/A	N/A	158	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

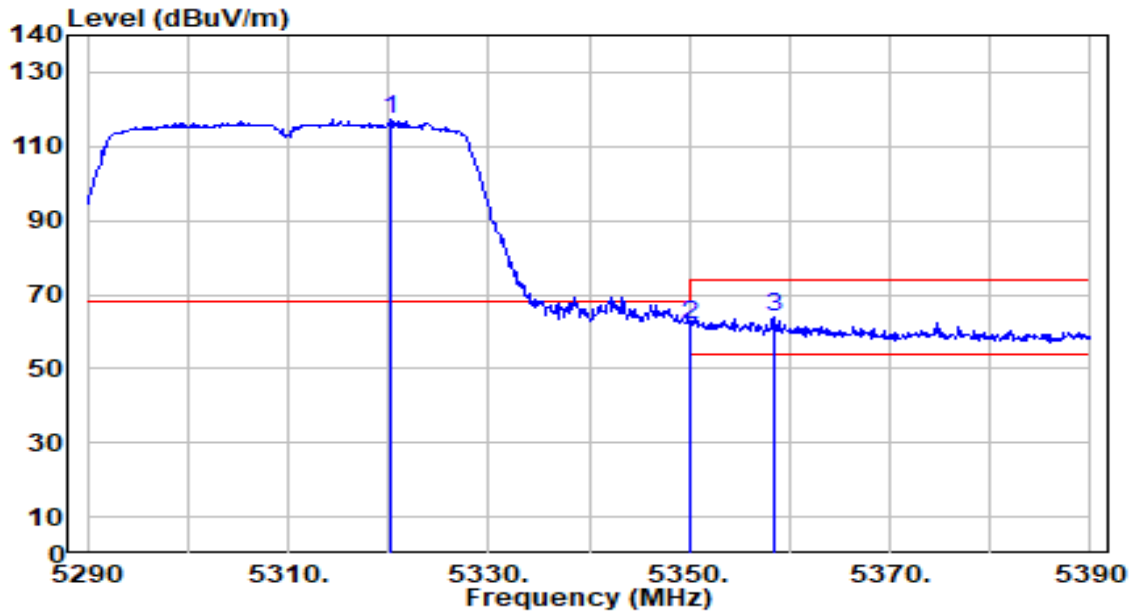


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.200	116.65	0.52	117.17	N/A	N/A	190	179	Peak
2	5350.000	61.50	0.47	61.97	-12.03	74.00	190	179	Peak
3	* 5358.400	63.38	0.46	63.84	-10.16	74.00	190	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

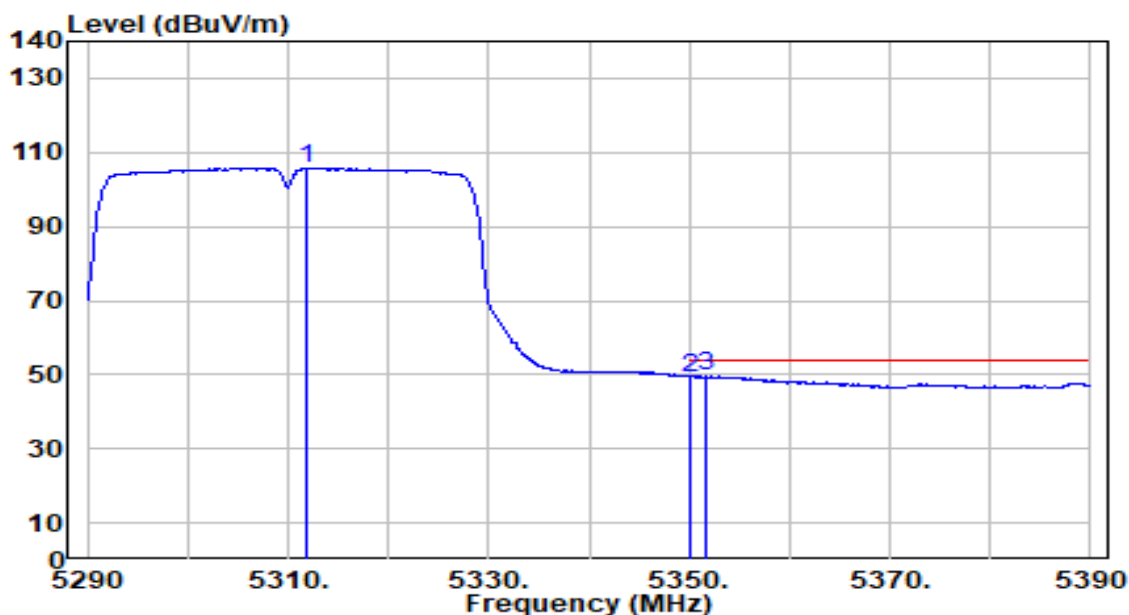


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.800	105.20	0.53	105.73	N/A	N/A	190	179	Average
2	5350.000	48.83	0.47	49.30	-4.70	54.00	190	179	Average
3	* 5351.600	49.30	0.47	49.77	-4.23	54.00	190	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

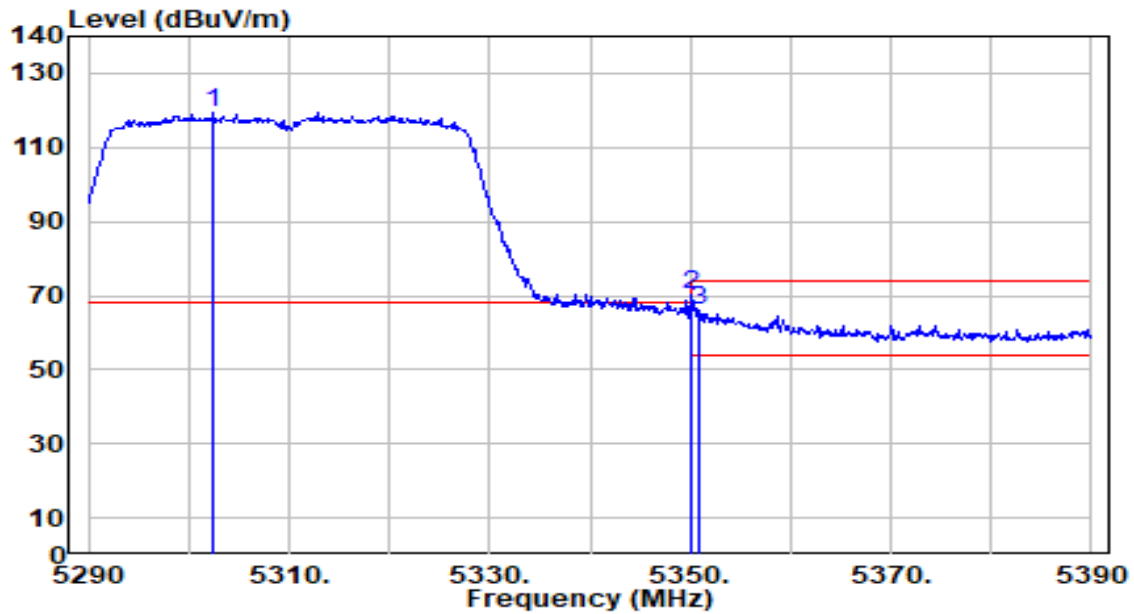


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5302.400	118.88	0.54	119.42	N/A	N/A	152	178	Peak
2	*	5350.000	69.99	0.47	70.46	-3.54	74.00	152	178	Peak
3		5351.000	65.57	0.47	66.04	-7.96	74.00	152	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

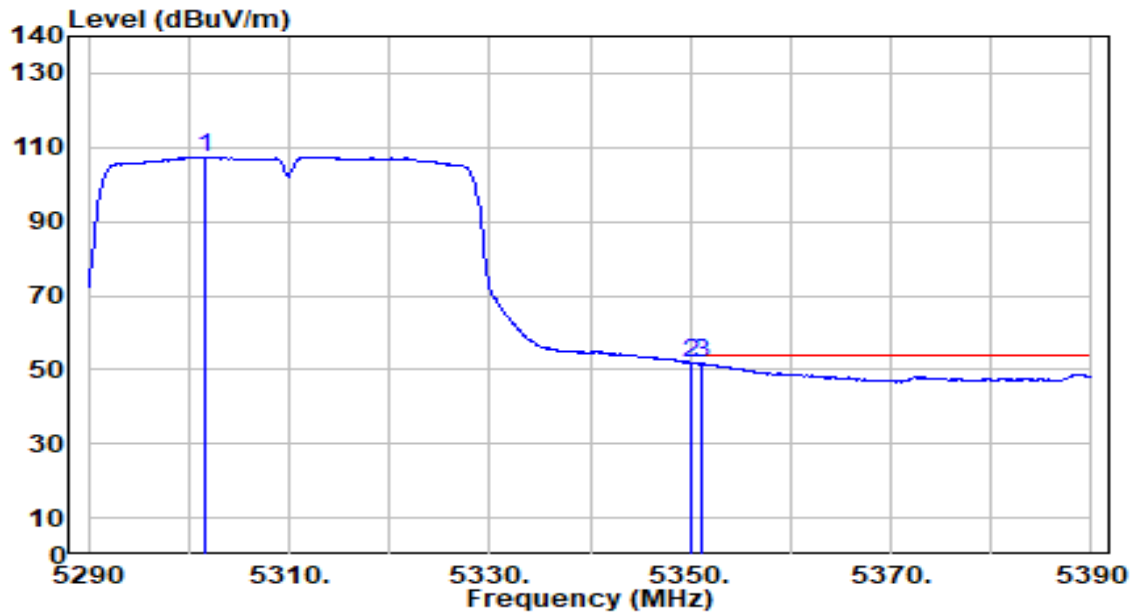


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5301.700	106.83	0.55	107.38	N/A	N/A	152	178	Average
2	*	5350.000	51.48	0.47	51.95	-2.05	54.00	152	178	Average
3		5351.100	51.18	0.47	51.65	-2.35	54.00	152	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

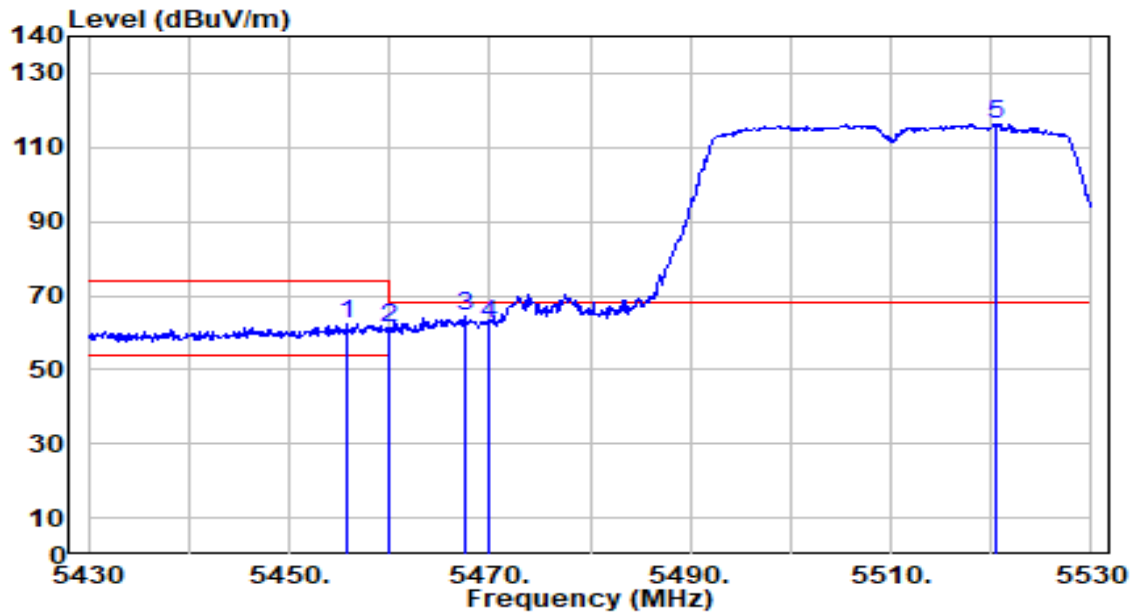


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.800	61.75	0.64	62.40	-11.60	74.00	198	186	Peak
2	5460.000	60.52	0.66	61.18	-12.82	74.00	198	186	Peak
3	* 5467.500	63.56	0.70	64.25	-3.95	68.20	198	186	Peak
4	5470.000	61.39	0.71	62.10	-6.10	68.20	198	186	Peak
5	5520.400	115.54	0.94	116.48	N/A	N/A	198	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

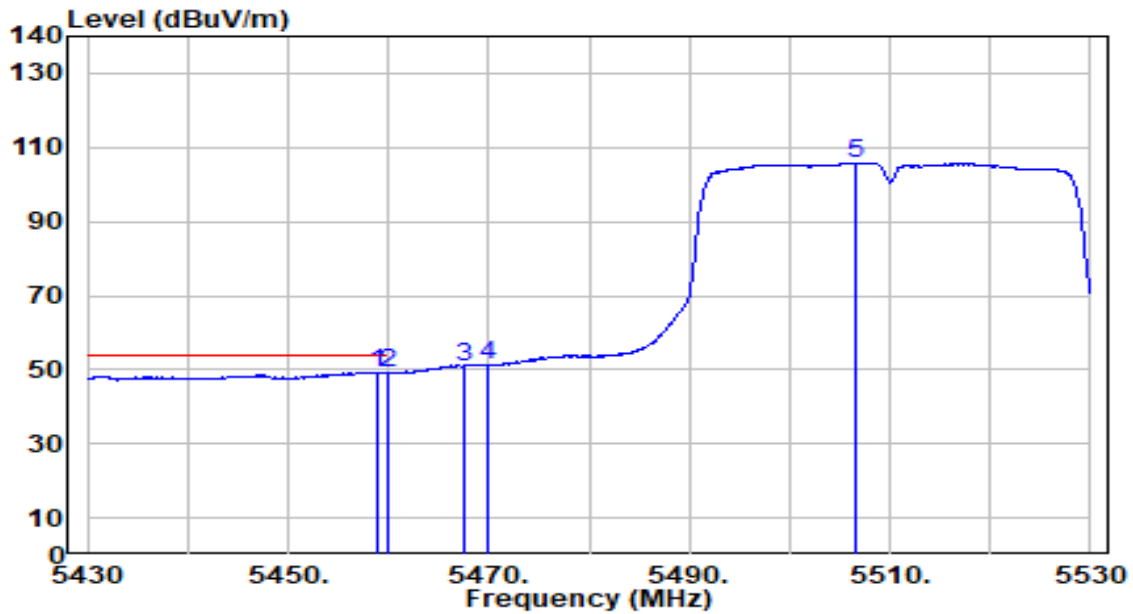


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5459.000	48.63	0.66	49.29	-4.71	54.00	198	186	Average
2		5460.000	48.45	0.66	49.11	-4.89	54.00	198	186	Average
3		5467.500	50.26	0.70	50.96	N/A	N/A	198	186	Average
4		5470.000	50.50	0.71	51.21	N/A	N/A	198	186	Average
5		5506.500	104.98	0.87	105.85	N/A	N/A	198	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

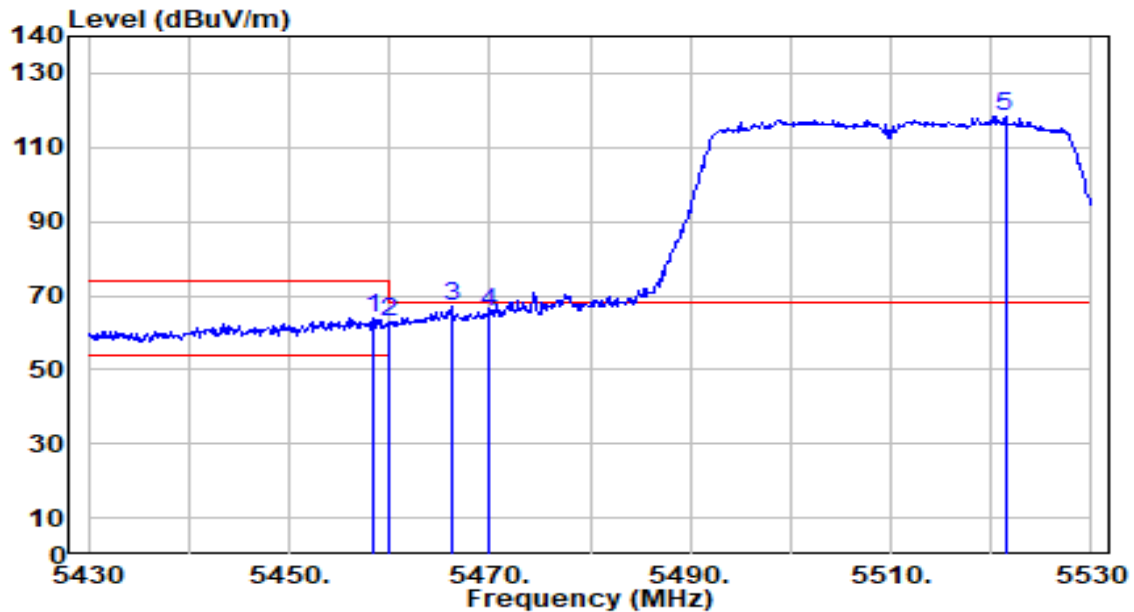


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.500	63.50	0.65	64.15	-9.85	74.00	161	184	Peak
2	5460.000	62.06	0.66	62.73	-11.27	74.00	161	184	Peak
3	* 5466.200	66.27	0.69	66.96	-1.24	68.20	161	184	Peak
4	5470.000	64.61	0.71	65.32	-2.88	68.20	161	184	Peak
5	5521.400	117.39	0.94	118.33	N/A	N/A	161	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

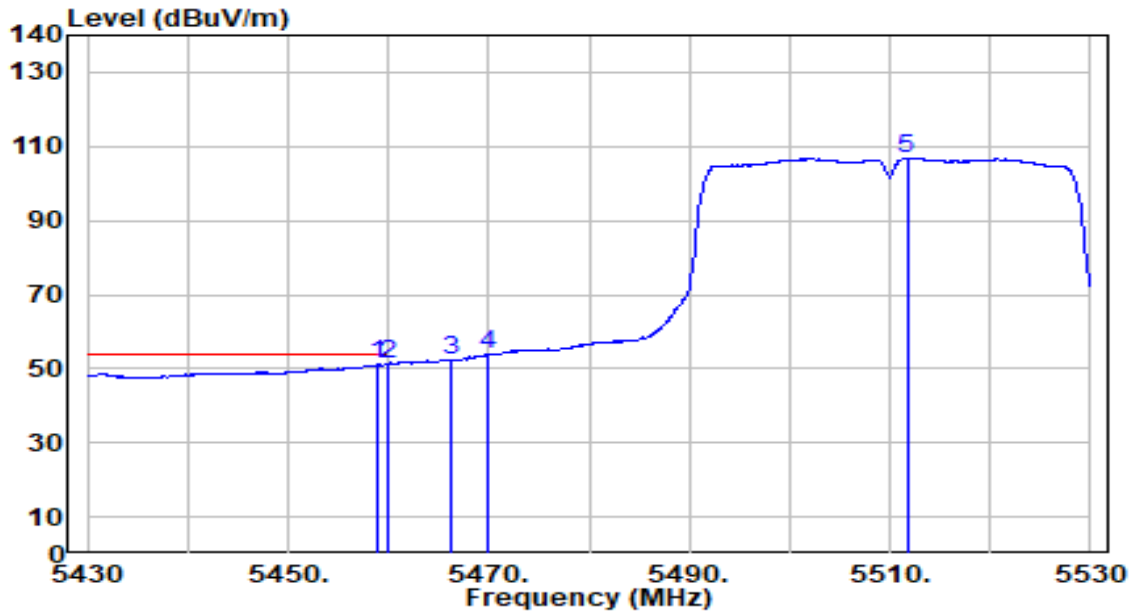


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.800	50.33	0.66	50.98	-3.02	54.00	161	184	Average
2	*	5460.000	50.49	0.66	51.15	-2.85	54.00	161	184	Average
3		5466.200	51.54	0.69	52.23	N/A	N/A	161	184	Average
4		5470.000	53.18	0.71	53.89	N/A	N/A	161	184	Average
5		5511.700	105.98	0.89	106.87	N/A	N/A	161	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

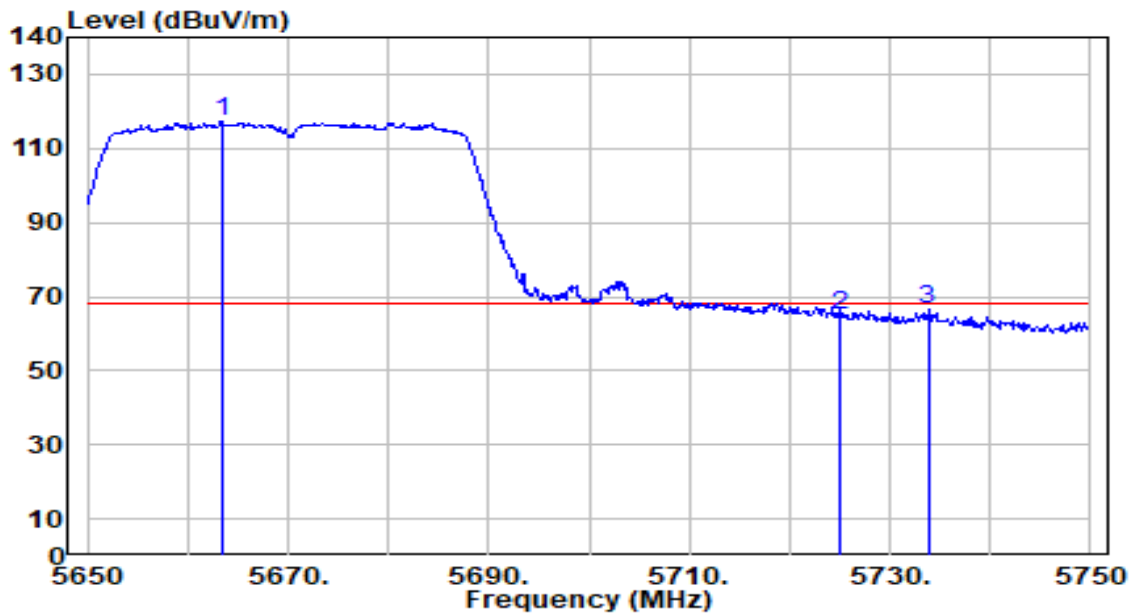


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5663.500	115.70	1.61	117.31	N/A	N/A	170	181	Peak
2	5725.000	63.15	1.89	65.05	-3.15	68.20	170	181	Peak
3	* 5733.800	64.67	1.93	66.61	-1.59	68.20	170	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

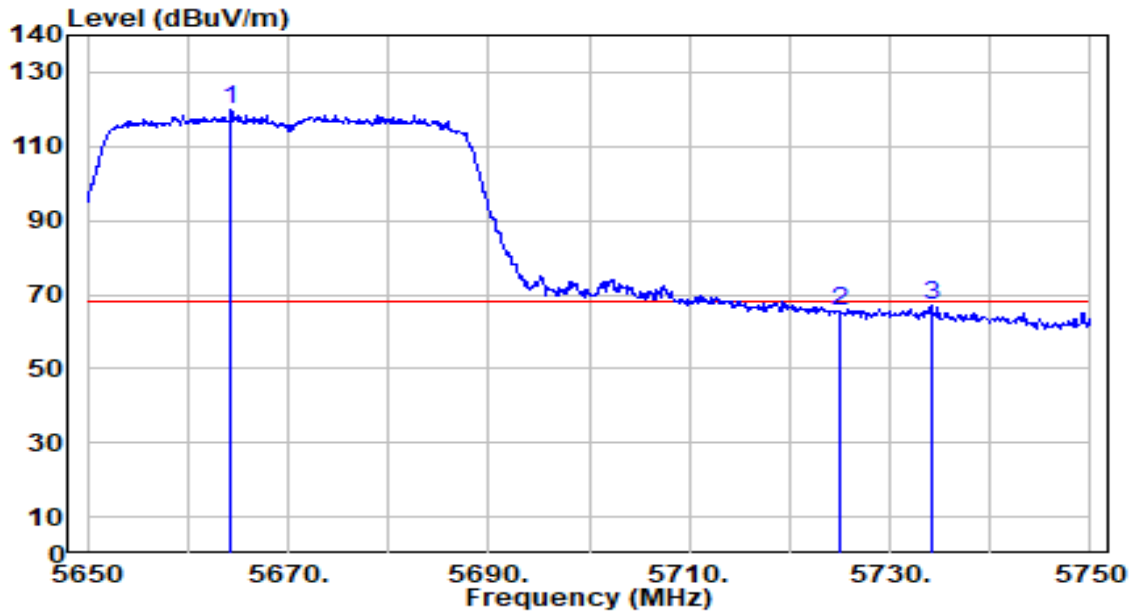


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5664.300	118.09	1.61	119.70	N/A	N/A	193	185	Peak
2	5725.000	63.41	1.89	65.31	-2.89	68.20	193	185	Peak
3	* 5734.200	64.94	1.94	66.87	-1.33	68.20	193	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

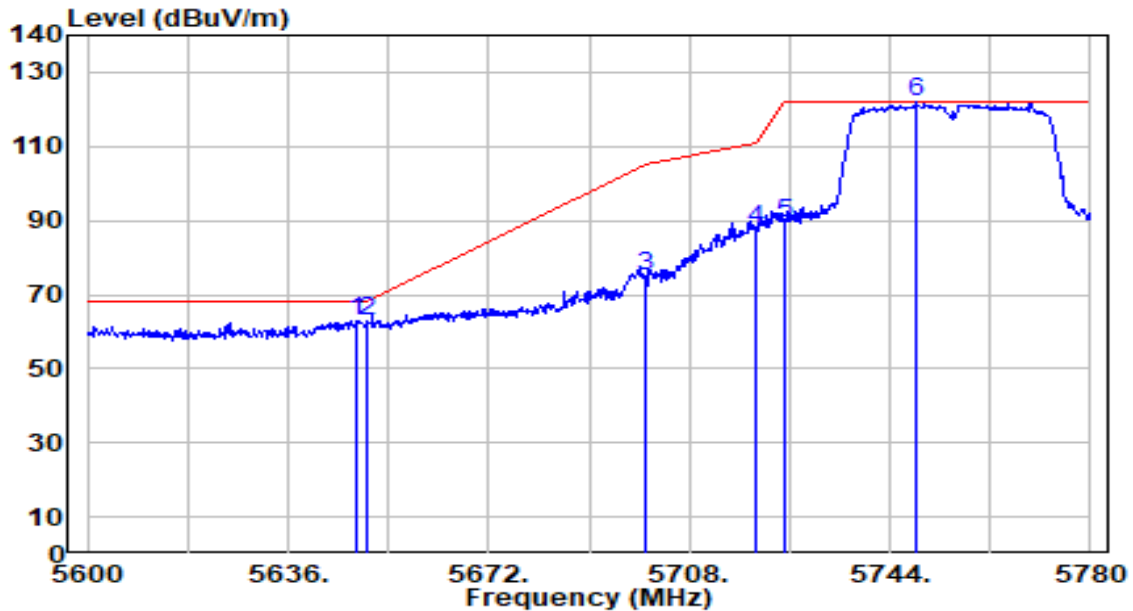


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.420	61.59	1.53	63.13	-5.07	68.20	200	178	Peak
2		5650.000	61.28	1.54	62.82	-5.38	68.20	200	178	Peak
3		5700.000	73.06	1.78	74.83	-30.37	105.20	200	178	Peak
4		5720.000	85.59	1.87	87.46	-23.34	110.80	200	178	Peak
5		5725.000	87.40	1.89	89.30	-32.90	122.20	200	178	Peak
6		5748.680	119.87	2.00	121.87	N/A	N/A	200	178	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

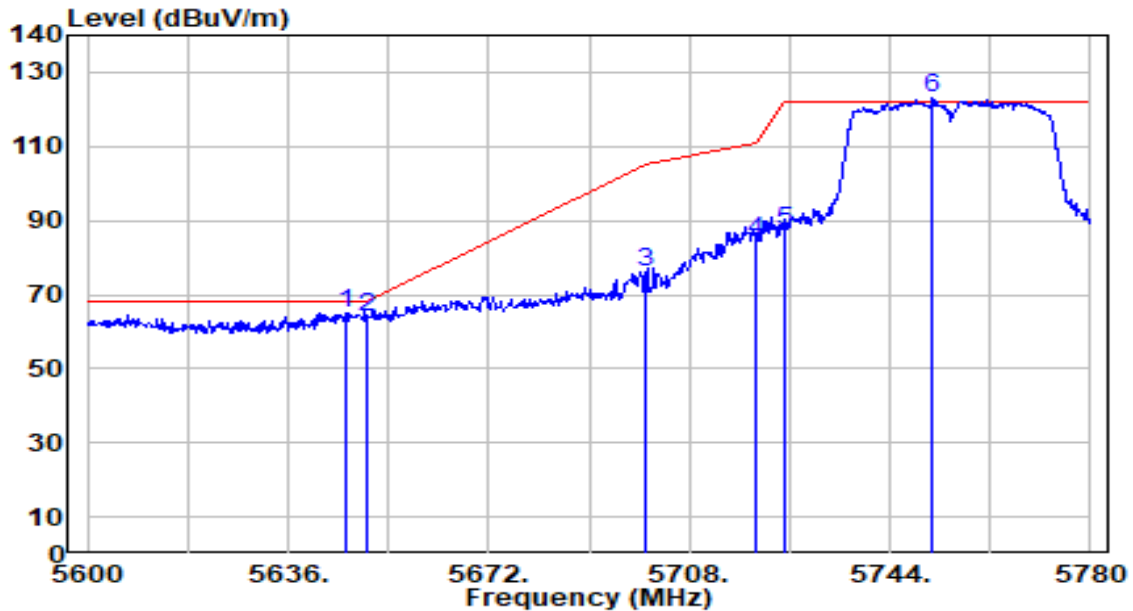


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.260	63.57	1.52	65.10	-3.10	68.20	200	178	Peak
2		5650.000	62.26	1.54	63.81	-4.39	68.20	200	178	Peak
3		5700.000	74.18	1.78	75.96	-29.24	105.20	200	178	Peak
4		5720.000	82.90	1.87	84.77	-26.03	110.80	200	178	Peak
5		5725.000	85.37	1.89	87.27	-34.93	122.20	200	178	Peak
6		5751.740	120.82	2.02	122.84	N/A	N/A	200	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

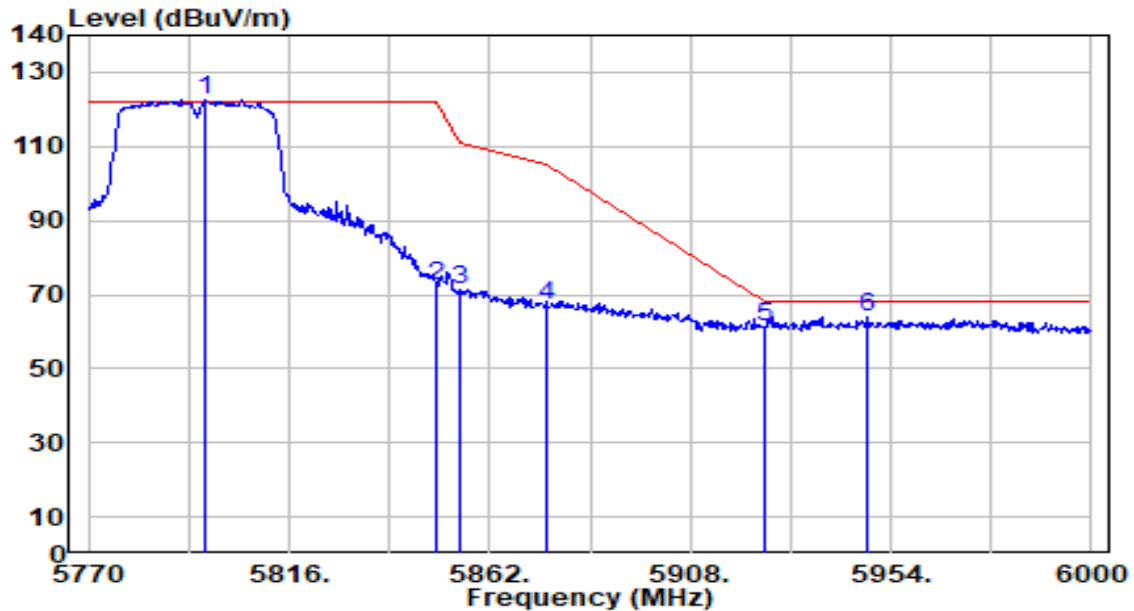


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5796.910	120.12	2.23	122.35	N/A	N/A	200	182	Peak
2	5850.000	69.98	2.25	72.23	-49.97	122.20	200	182	Peak
3	5855.000	69.19	2.25	71.44	-39.36	110.80	200	182	Peak
4	5875.000	65.09	2.26	67.35	-37.85	105.20	200	182	Peak
5	5925.000	59.23	2.27	61.49	-6.71	68.20	200	182	Peak
6	* 5948.710	61.83	2.27	64.10	-4.10	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

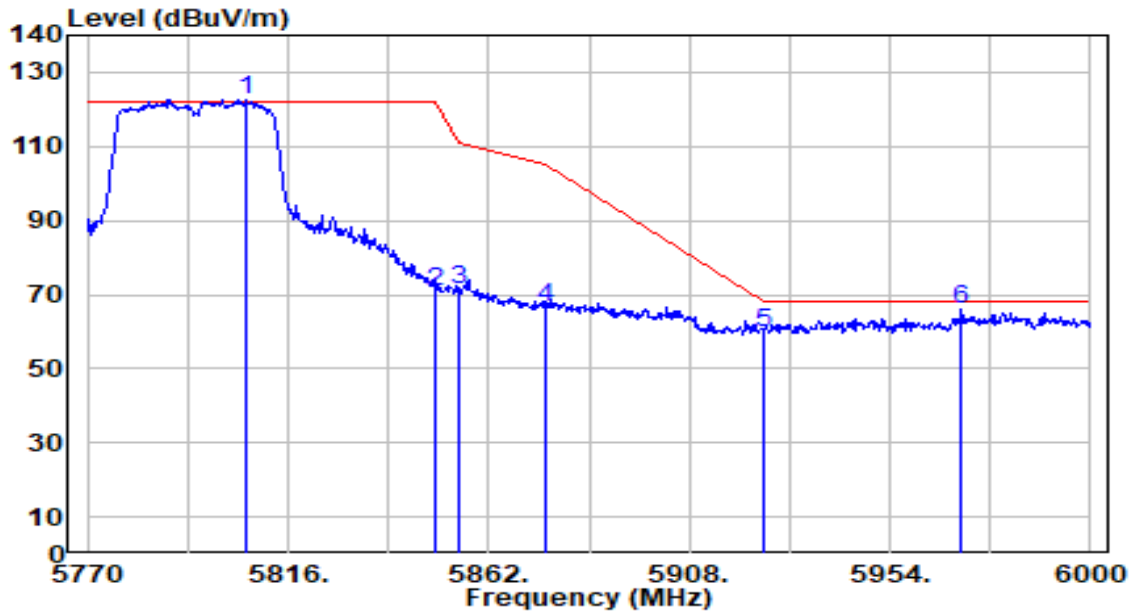


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5806.340	120.44	2.25	122.69	N/A	N/A	200	178	Peak
2	5850.000	68.53	2.25	70.78	-51.42	122.20	200	178	Peak
3	5855.000	68.84	2.25	71.09	-39.71	110.80	200	178	Peak
4	5875.000	64.15	2.26	66.40	-38.80	105.20	200	178	Peak
5	5925.000	57.42	2.27	59.69	-8.51	68.20	200	178	Peak
6	* 5970.330	63.85	2.27	66.12	-2.08	68.20	200	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

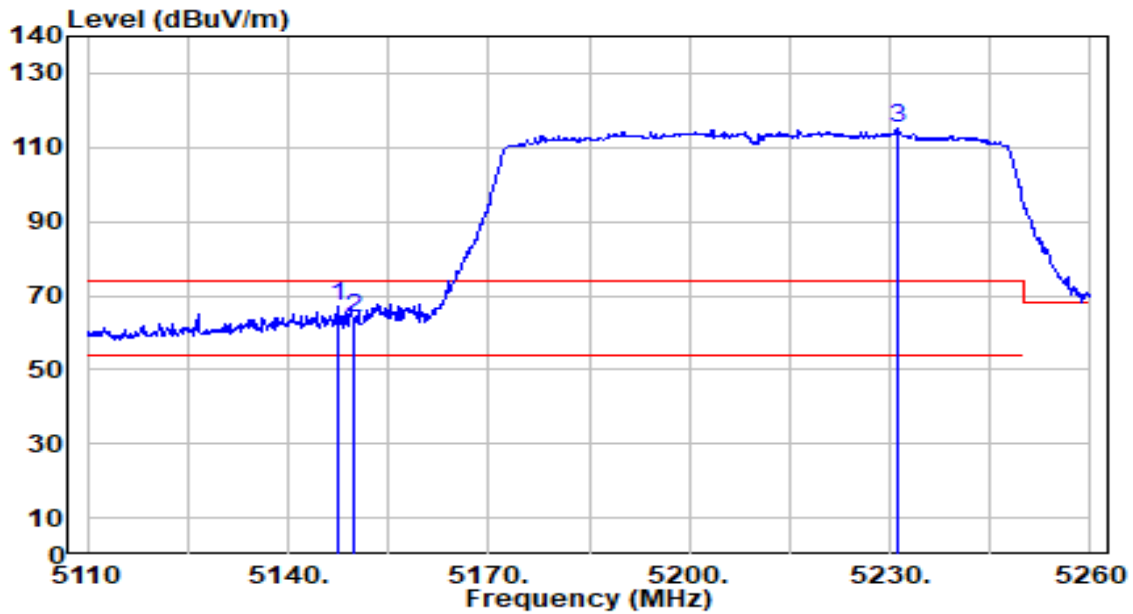


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.500	66.35	0.65	67.00	-7.00	74.00	167	178	Peak
2		5150.000	63.23	0.65	63.88	-10.12	74.00	167	178	Peak
3		5231.200	114.54	0.65	115.20	N/A	N/A	167	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

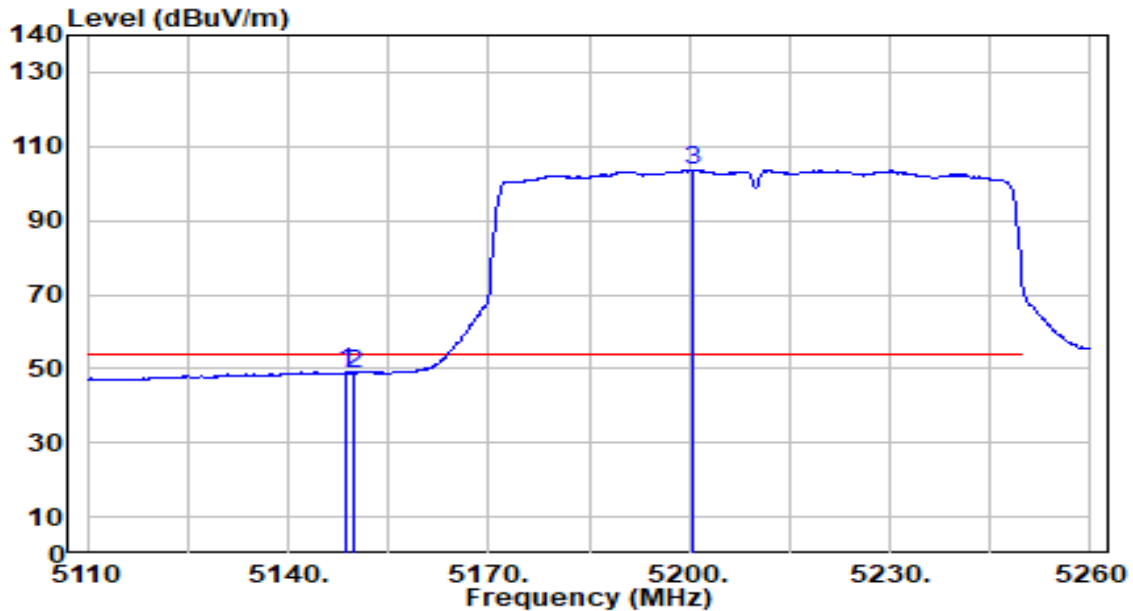


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.550	48.47	0.65	49.12	-4.88	54.00	167	178	Average
2		5150.000	48.06	0.65	48.71	-5.29	54.00	167	178	Average
3		5200.450	102.90	0.70	103.60	N/A	N/A	167	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

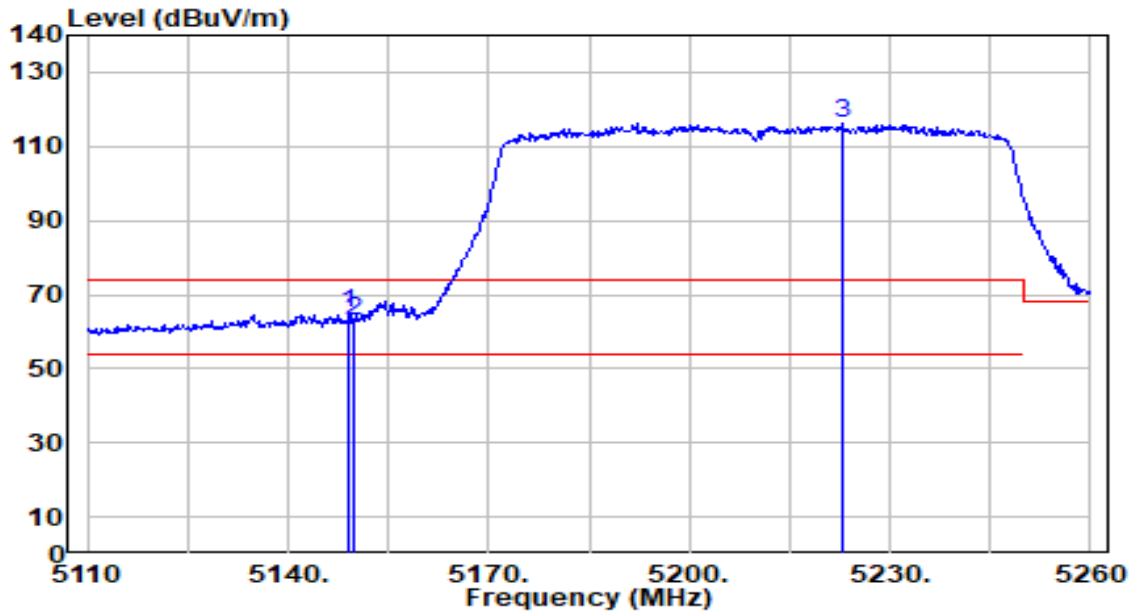


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.000	64.44	0.65	65.10	-8.90	74.00	158	180	Peak
2		5150.000	62.27	0.65	62.92	-11.08	74.00	158	180	Peak
3		5222.800	115.67	0.67	116.34	N/A	N/A	158	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

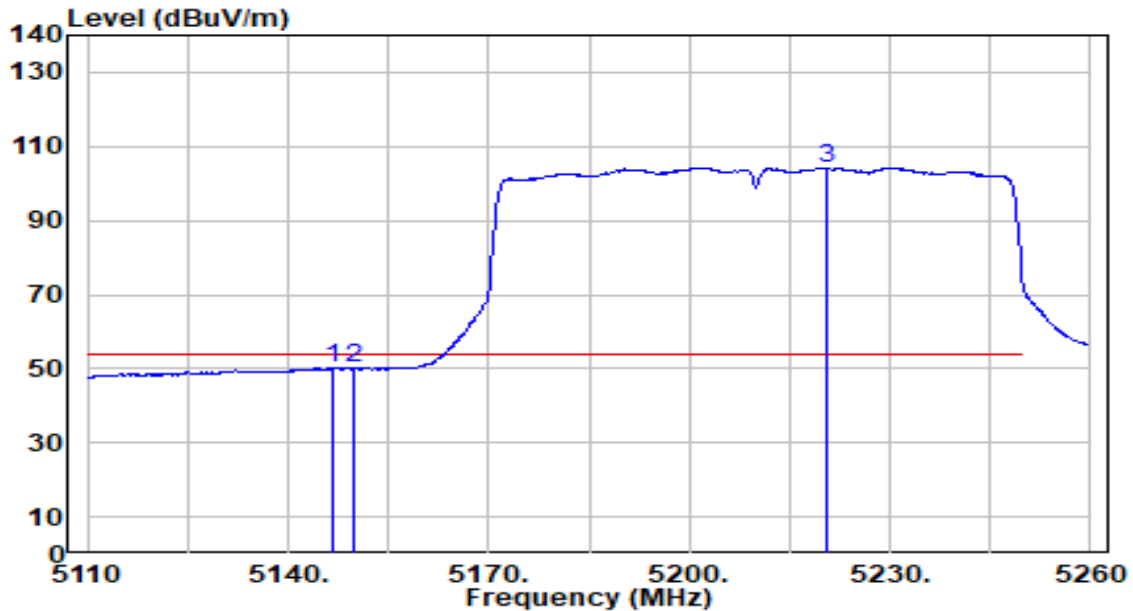


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.600	49.64	0.65	50.29	-3.71	54.00	158	180	Average
2		5150.000	49.43	0.65	50.08	-3.92	54.00	158	180	Average
3		5220.550	103.55	0.67	104.22	N/A	N/A	158	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

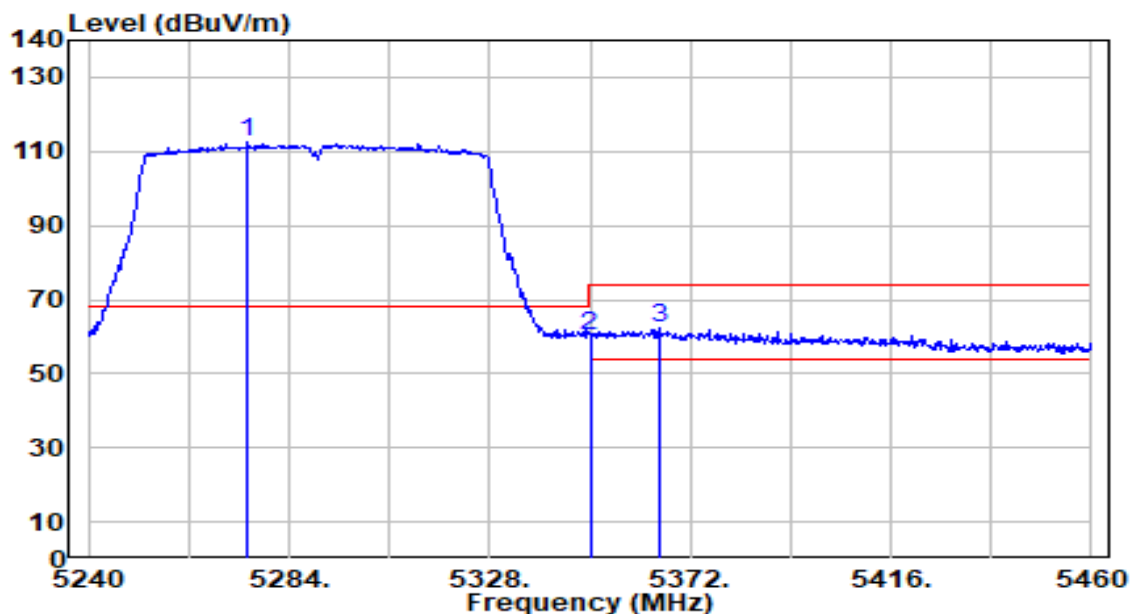


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5274.760	111.92	0.59	112.50	N/A	N/A	190	179	Peak
2	5350.000	59.74	0.47	60.21	-13.79	74.00	190	179	Peak
3	* 5365.180	61.86	0.45	62.31	-11.69	74.00	190	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

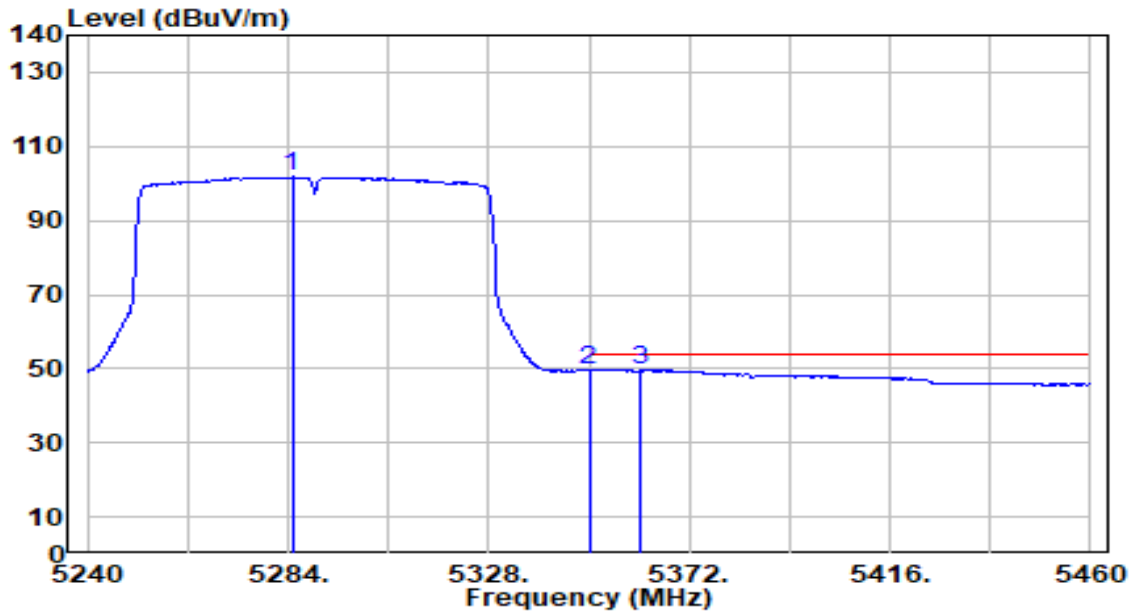


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5284.880	101.13	0.57	101.70	N/A	N/A	190	179	Average
2	5350.000	49.15	0.47	49.62	-4.38	54.00	190	179	Average
3	* 5361.440	49.42	0.45	49.88	-4.12	54.00	190	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

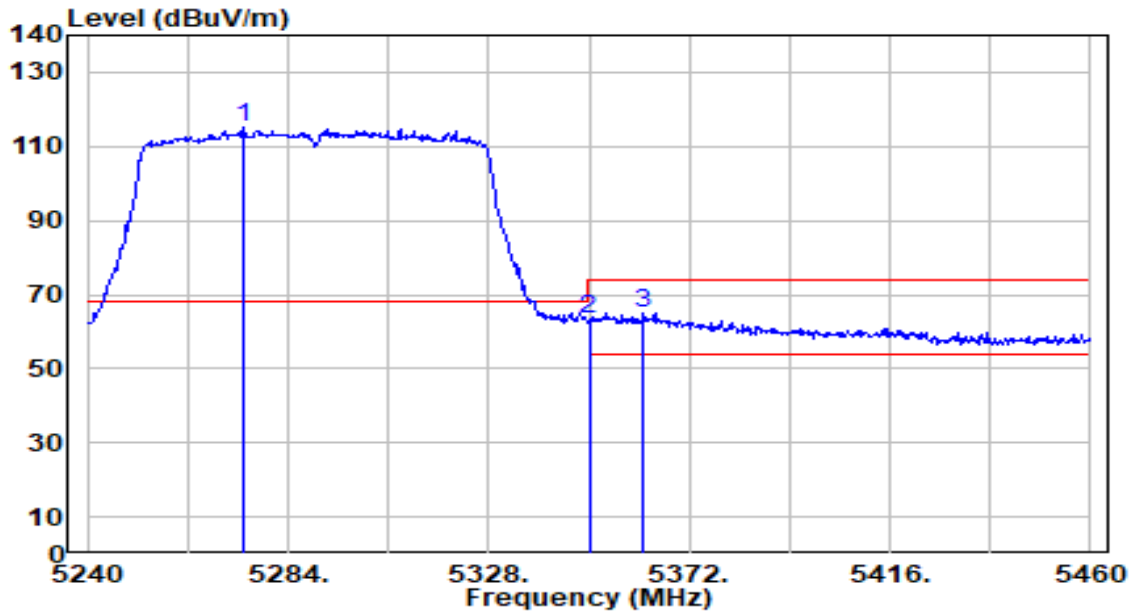


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5274.320	114.51	0.59	115.10	N/A	N/A	152	178	Peak
2	5350.000	62.76	0.47	63.23	-10.77	74.00	152	178	Peak
3	* 5361.880	64.74	0.45	65.19	-8.81	74.00	152	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

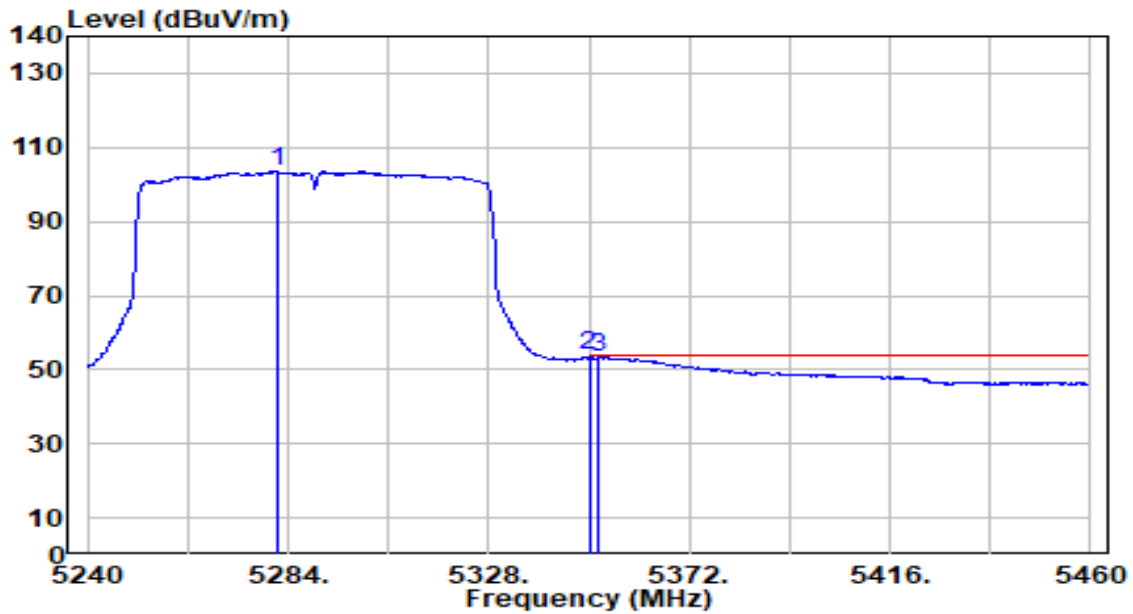


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5281.580	102.85	0.58	103.43	N/A	N/A	152	178	Average
2	*	5350.000	53.26	0.47	53.74	-0.26	54.00	152	178	Average
3		5352.200	53.15	0.47	53.62	-0.38	54.00	152	178	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

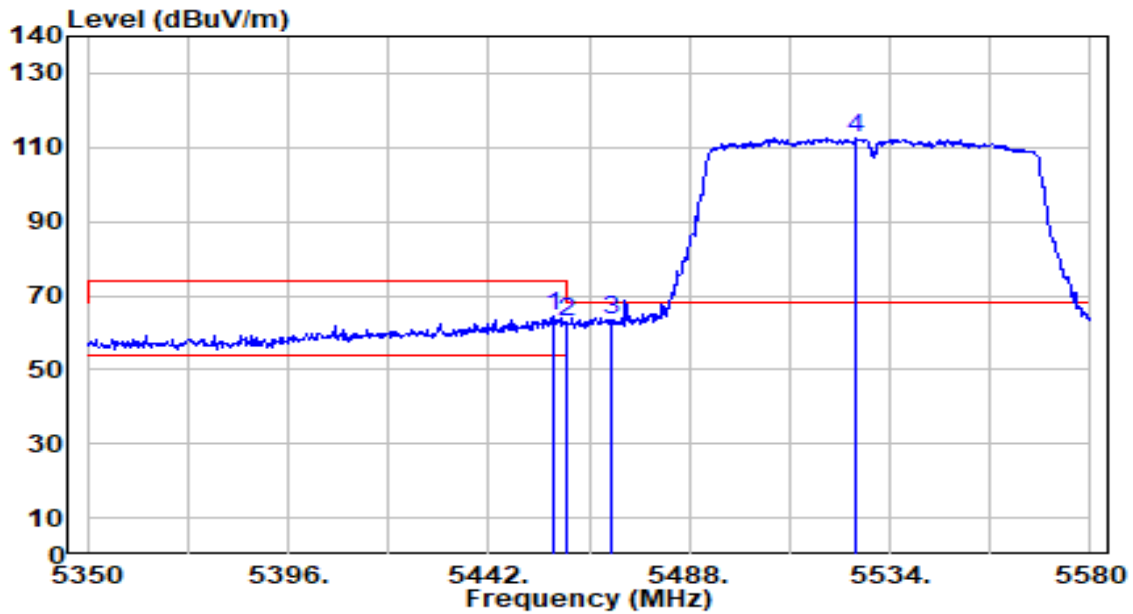


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.950	63.56	0.65	64.21	-9.79	74.00	198	186	Peak
2	5460.000	62.16	0.66	62.82	-11.18	74.00	198	186	Peak
3	* 5470.000	62.91	0.71	63.61	-4.59	68.20	198	186	Peak
4	5526.180	111.59	0.96	112.56	N/A	N/A	198	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

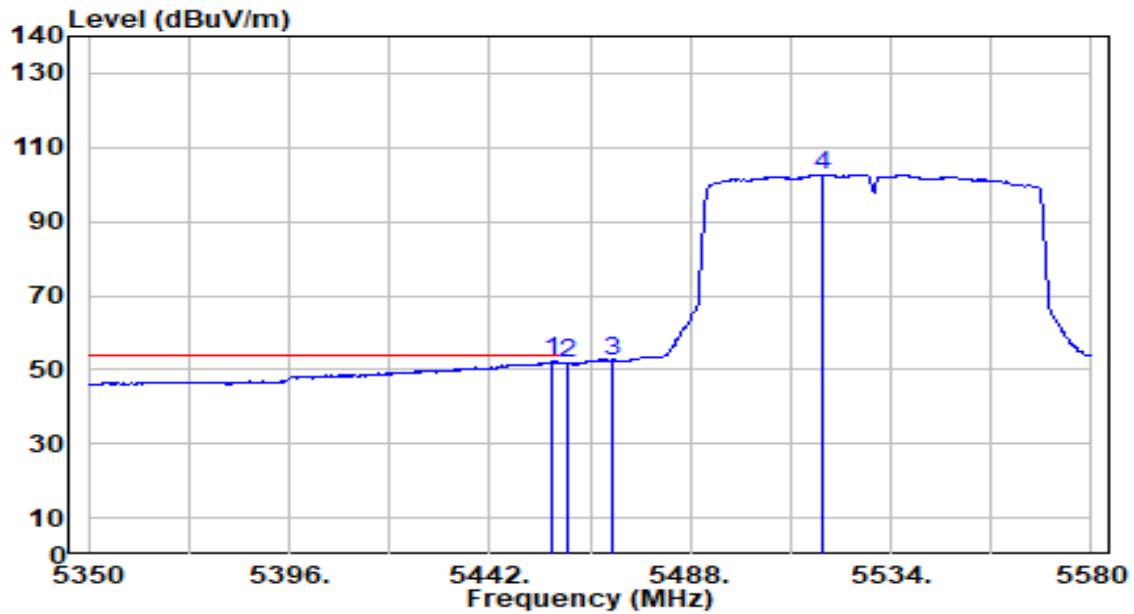


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.030	51.57	0.64	52.22	-1.78	54.00	198	186	Average
2		5460.000	51.06	0.66	51.72	-2.28	54.00	198	186	Average
3		5470.000	51.85	0.71	52.56	N/A	N/A	198	186	Average
4		5518.130	101.76	0.92	102.69	N/A	N/A	198	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

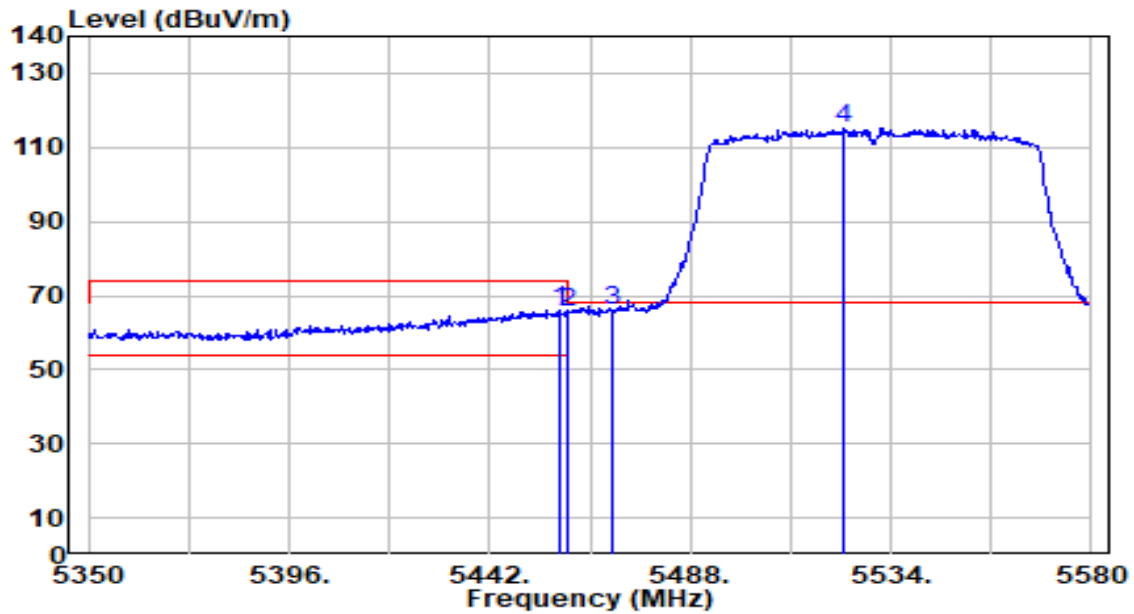


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	65.21	0.65	65.86	-8.14	74.00	161	184	Peak
2	5460.000	64.65	0.66	65.31	-8.69	74.00	161	184	Peak
3	* 5470.000	65.23	0.71	65.93	-2.27	68.20	161	184	Peak
4	5523.420	114.38	0.95	115.33	N/A	N/A	161	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

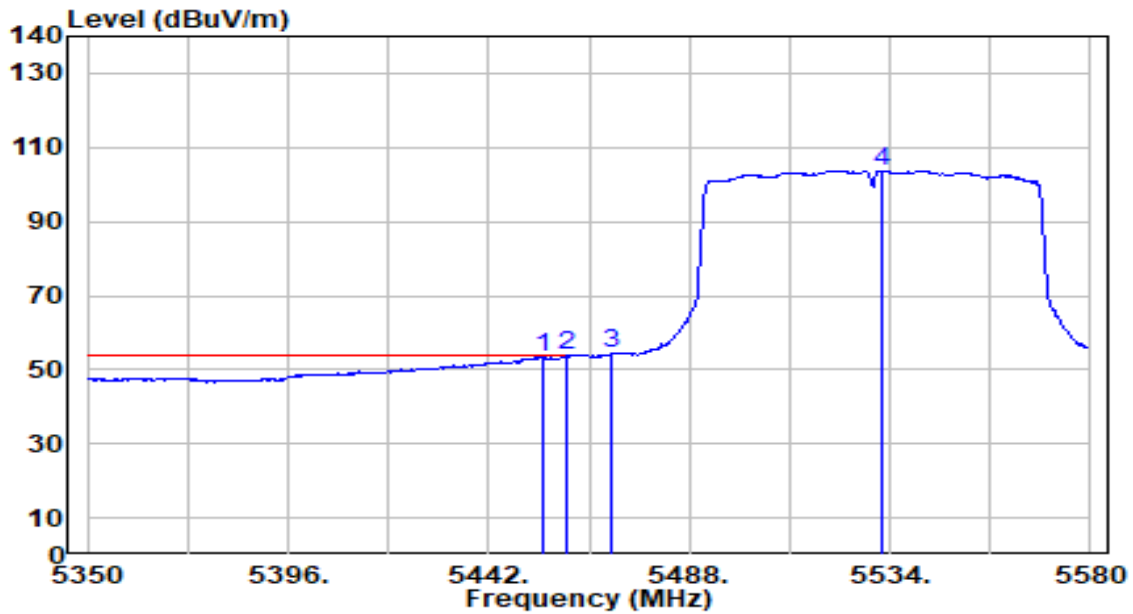


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5454.190	52.86	0.64	53.50	-0.50	54.00	161	184	Average
2	*	5460.000	53.13	0.66	53.80	-0.20	54.00	161	184	Average
3		5470.000	53.62	0.71	54.33	N/A	N/A	161	184	Average
4		5532.390	102.76	0.99	103.75	N/A	N/A	161	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

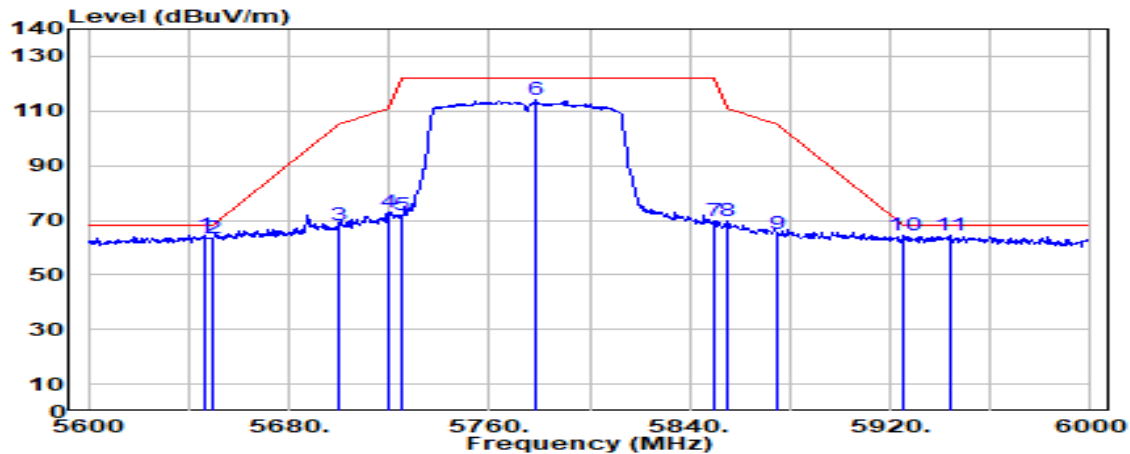


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5646.400	62.86	1.53	64.38	-3.82	68.20	200	182	Peak
2	5655.000	61.80	1.54	63.34	-4.86	68.20	200	182	Peak
3	5700.000	66.12	1.78	67.89	-37.31	105.20	200	182	Peak
4	5720.000	70.99	1.87	72.86	-37.94	110.80	200	182	Peak
5	5725.000	70.04	1.89	71.93	-50.27	122.20	200	182	Peak
6	5778.800	111.75	2.14	113.89	N/A	N/A	200	182	Peak
7	5850.000	67.73	2.25	69.99	-52.21	122.20	200	182	Peak
8	5855.000	67.32	2.25	69.58	-41.22	110.80	200	182	Peak
9	5875.000	62.66	2.26	64.92	-40.28	105.20	200	182	Peak
10	* 5925.000	62.25	2.27	64.51	-3.69	68.20	200	182	Peak
11	5944.000	62.00	2.27	64.27	-3.93	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

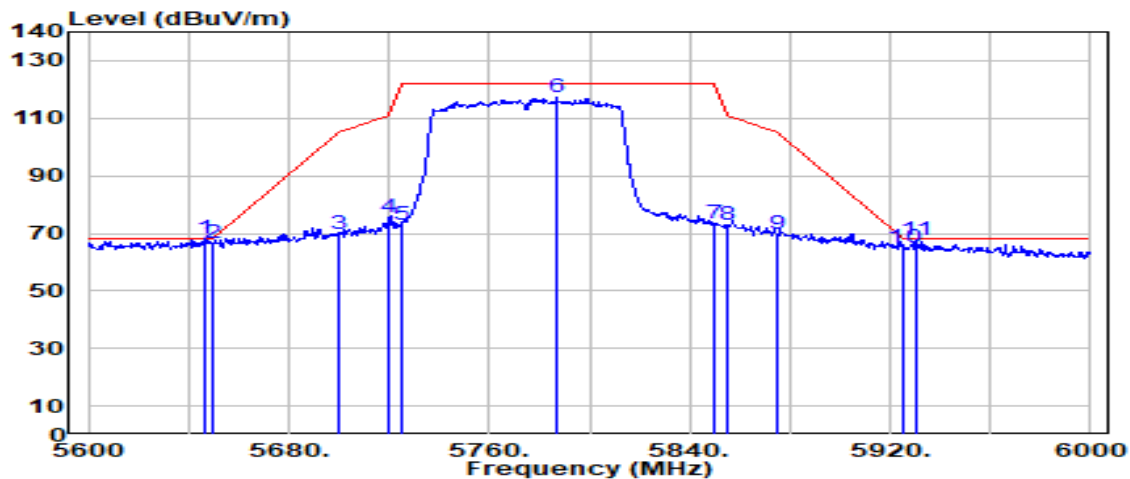


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	66.50	1.53	68.03	-0.17	68.20	200	178	Peak
2		5650.000	65.16	1.54	66.70	-1.50	68.20	200	178	Peak
3		5700.000	67.76	1.78	69.54	-35.66	105.20	200	178	Peak
4		5720.000	73.45	1.87	75.32	-35.48	110.80	200	178	Peak
5		5725.000	71.06	1.89	72.96	-49.24	122.20	200	178	Peak
6		5786.800	114.84	2.18	117.03	N/A	N/A	200	178	Peak
7		5850.000	71.44	2.25	73.69	-48.51	122.20	200	178	Peak
8		5855.000	70.62	2.25	72.88	-37.92	110.80	200	178	Peak
9		5875.000	67.54	2.26	69.80	-35.40	105.20	200	178	Peak
10		5925.000	62.52	2.27	64.79	-3.41	68.20	200	178	Peak
11		5930.000	65.28	2.27	67.55	-0.65	68.20	200	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

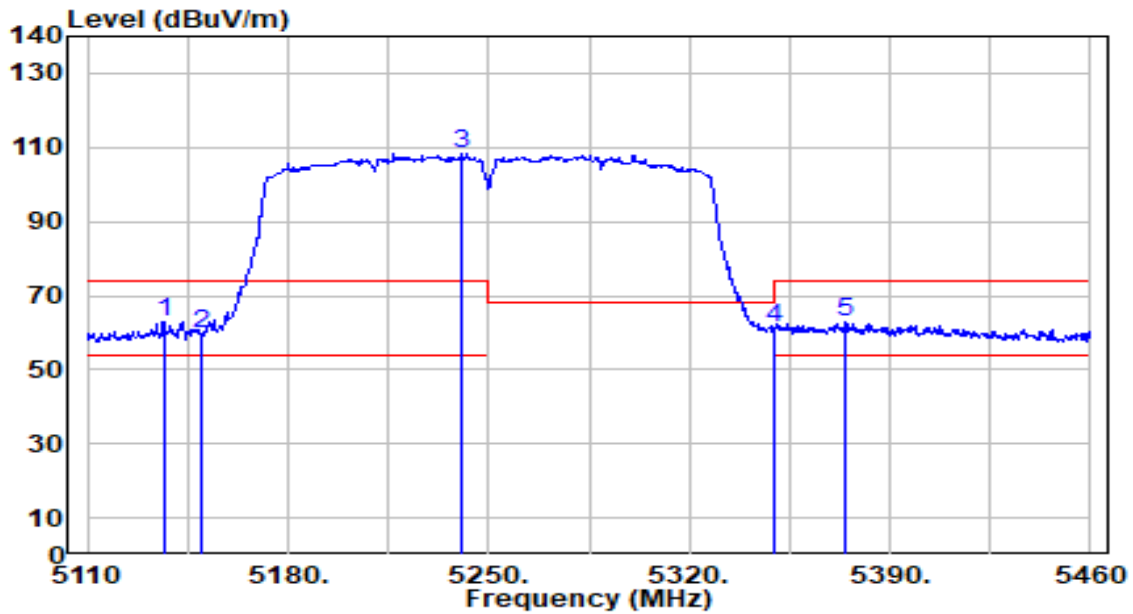


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5136.600	62.27	0.64	62.91	-11.09	74.00	167	178	Peak
2	5150.000	59.17	0.65	59.83	-14.17	74.00	167	178	Peak
3	5240.550	107.53	0.64	108.17	N/A	N/A	167	178	Peak
4	5350.000	60.61	0.47	61.09	-12.91	74.00	167	178	Peak
5	* 5374.250	62.61	0.43	63.05	-10.95	74.00	167	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

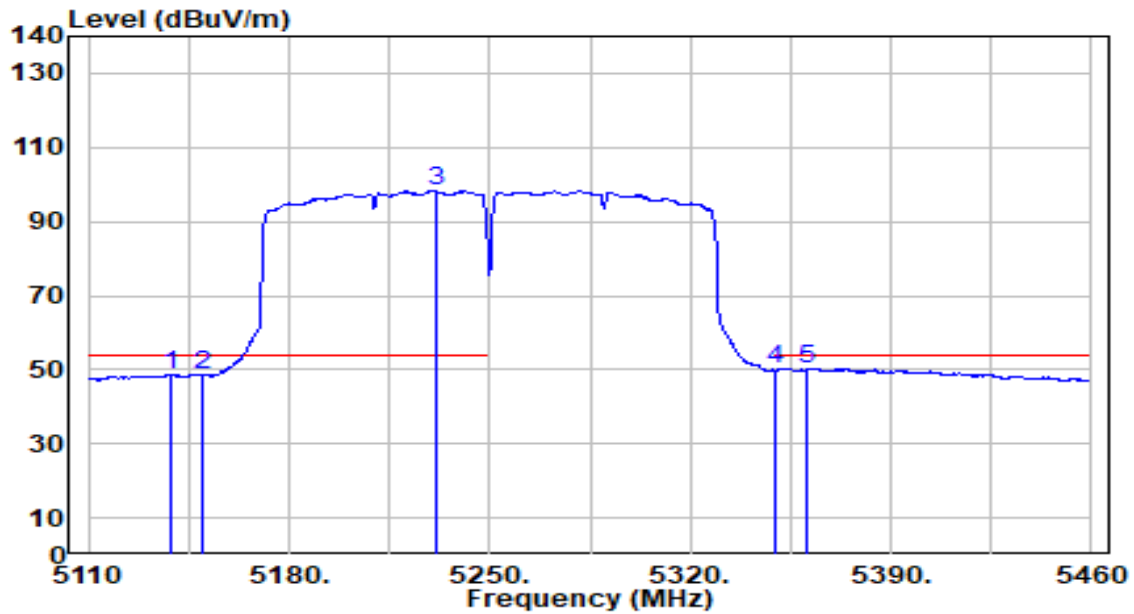


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5138.350	48.03	0.64	48.67	-5.33	54.00	167	178	Average
2	5150.000	47.98	0.65	48.64	-5.36	54.00	167	178	Average
3	5231.100	97.55	0.65	98.20	N/A	N/A	167	178	Average
4	5350.000	49.49	0.47	49.96	-4.04	54.00	167	178	Average
5	* 5360.600	49.89	0.45	50.34	-3.66	54.00	167	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

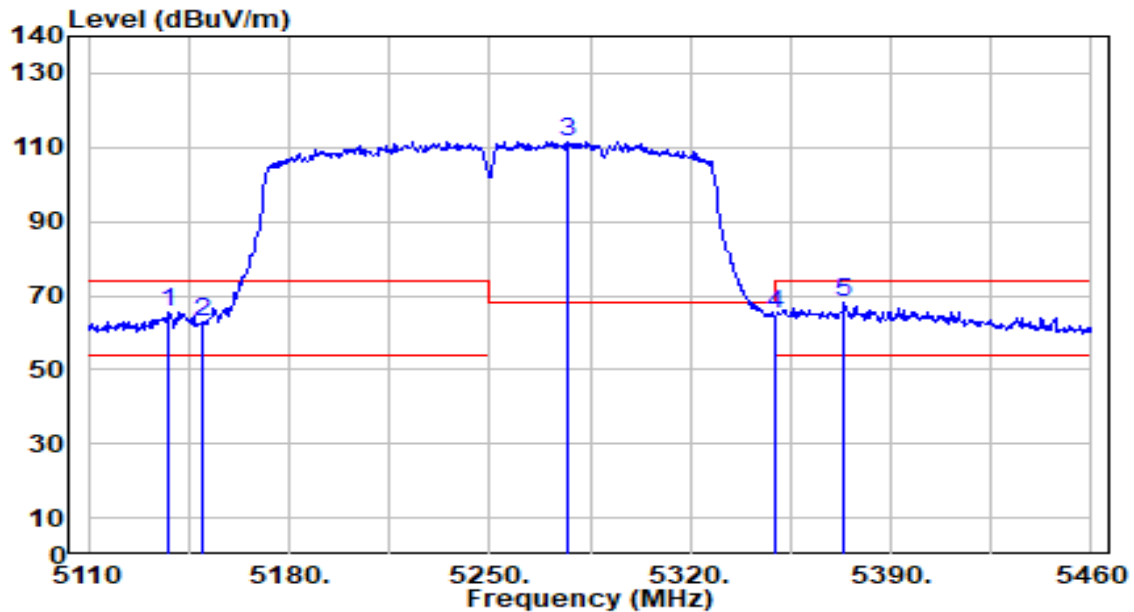


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5138.000	64.92	0.64	65.56	-8.44	74.00	158	180	Peak
2	5150.000	62.12	0.65	62.78	-11.22	74.00	158	180	Peak
3	5277.650	111.14	0.58	111.72	N/A	N/A	158	180	Peak
4	5350.000	64.56	0.47	65.03	-8.97	74.00	158	180	Peak
5	* 5373.900	67.75	0.43	68.19	-5.81	74.00	158	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplicifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

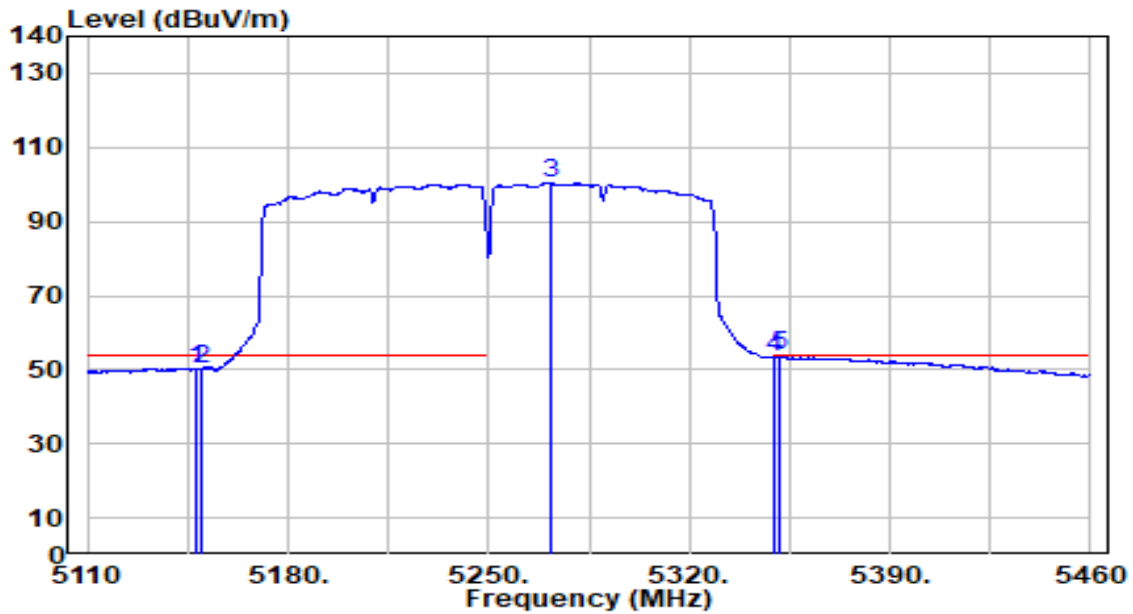


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.150	49.65	0.65	50.30	-3.70	54.00	158	180	Average
2	5150.000	49.65	0.65	50.30	-3.70	54.00	158	180	Average
3	5272.050	99.78	0.59	100.37	N/A	N/A	158	180	Average
4	5350.000	52.72	0.47	53.19	-0.81	54.00	158	180	Average
5	* 5351.500	53.30	0.47	53.77	-0.23	54.00	158	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

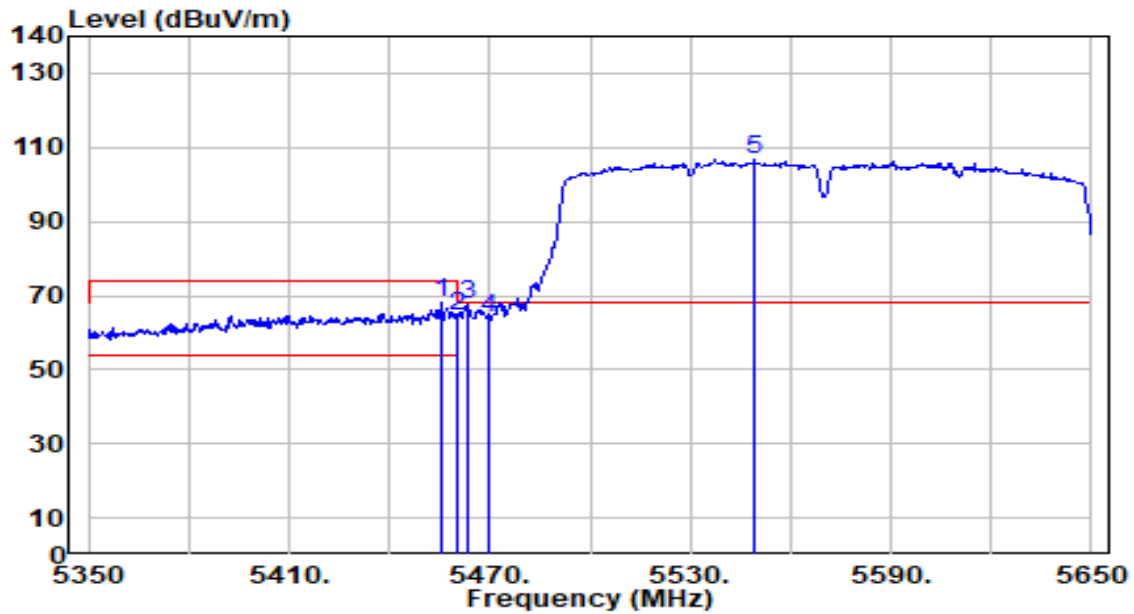


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.300	67.31	0.64	67.95	-6.05	74.00	198	186	Peak
2	5460.000	63.61	0.66	64.27	-9.73	74.00	198	186	Peak
3	* 5463.100	66.82	0.68	67.50	-0.70	68.20	198	186	Peak
4	5470.000	63.45	0.71	64.16	-4.04	68.20	198	186	Peak
5	5549.500	105.53	1.07	106.60	N/A	N/A	198	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

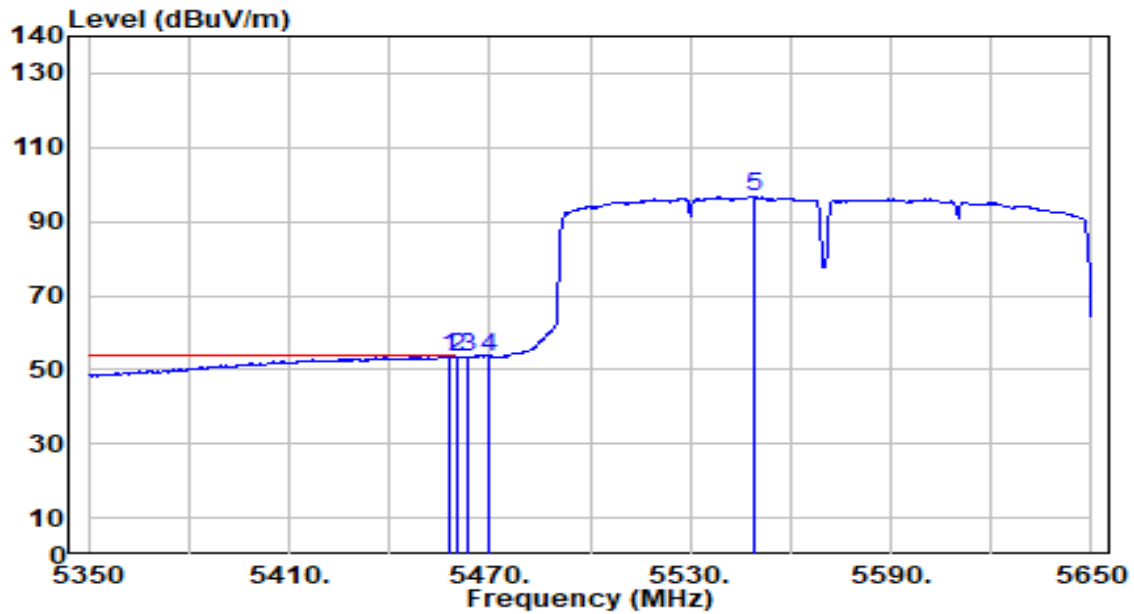


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.300	52.93	0.65	53.58	-0.42	54.00	198	186	Average
2		5460.000	52.77	0.66	53.43	-0.57	54.00	198	186	Average
3		5463.400	52.71	0.68	53.39	N/A	N/A	198	186	Average
4		5470.000	52.89	0.71	53.60	N/A	N/A	198	186	Average
5		5549.200	95.69	1.07	96.76	N/A	N/A	198	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

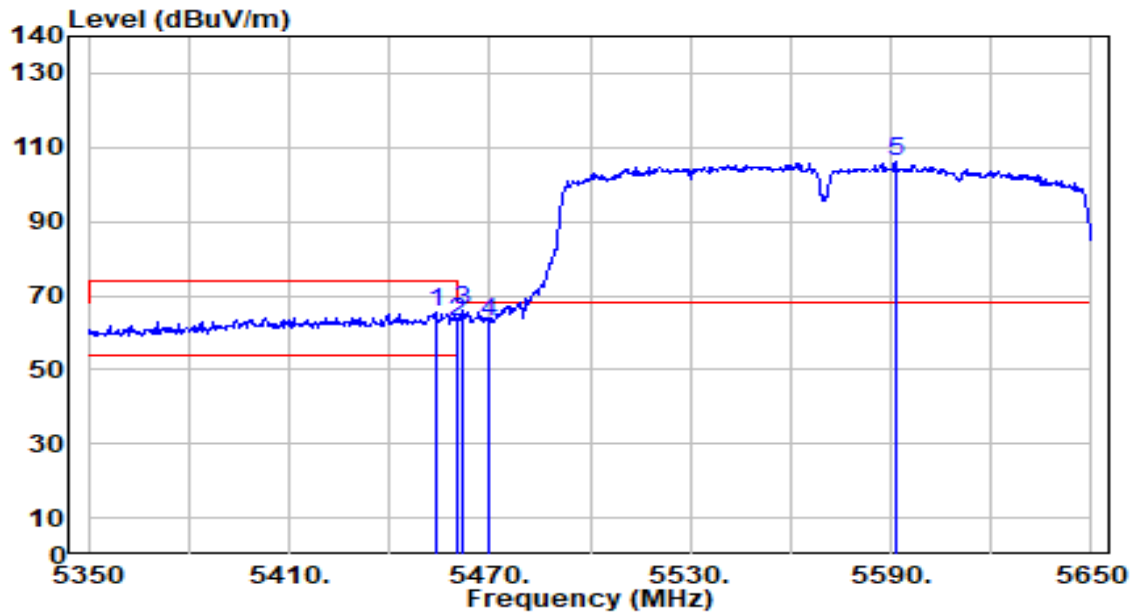


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.100	65.10	0.64	65.73	-8.27	74.00	161	184	Peak
2	5460.000	62.14	0.66	62.80	-11.20	74.00	161	184	Peak
3	* 5462.200	65.43	0.67	66.10	-2.10	68.20	161	184	Peak
4	5470.000	62.42	0.71	63.12	-5.08	68.20	161	184	Peak
5	5591.200	104.95	1.27	106.21	N/A	N/A	161	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

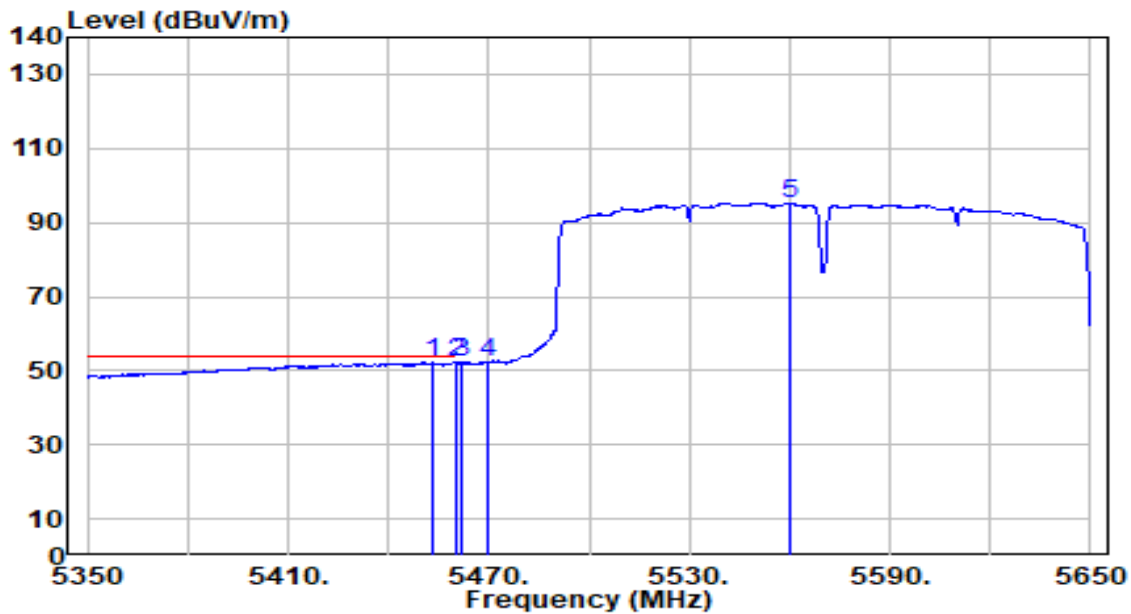


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5452.900	51.46	0.63	52.08	-1.92	54.00	161	184	Average
2	*	5460.000	51.43	0.66	52.09	-1.91	54.00	161	184	Average
3		5462.200	51.52	0.67	52.19	N/A	N/A	161	184	Average
4		5470.000	51.70	0.71	52.40	N/A	N/A	161	184	Average
5		5560.300	94.15	1.12	95.28	N/A	N/A	161	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

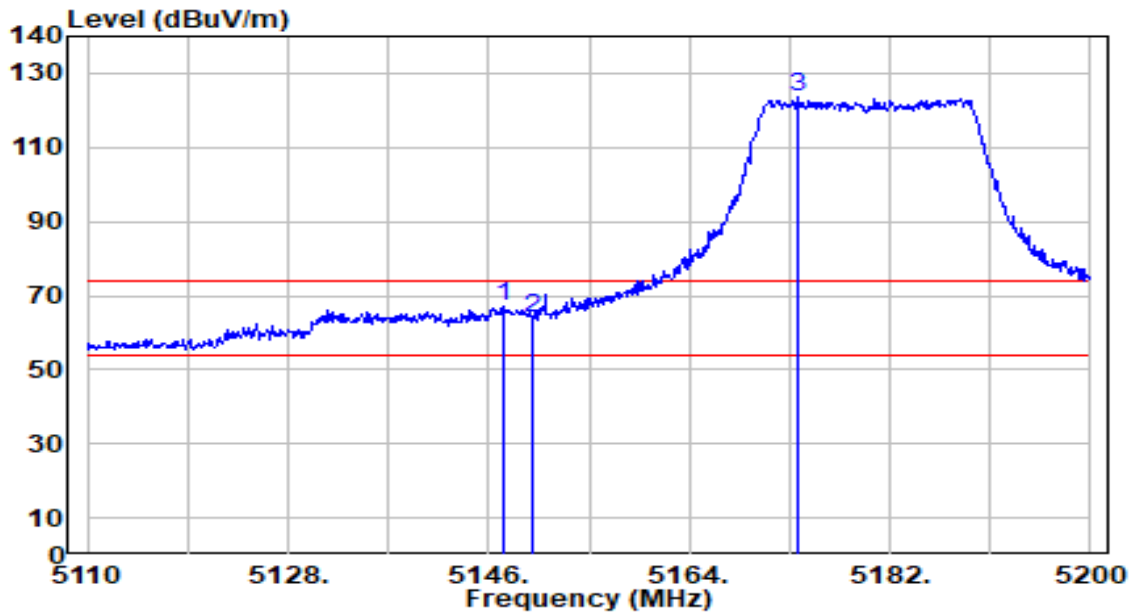


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.440	66.38	0.65	67.03	-6.97	74.00	167	178	Peak
2		5150.000	63.53	0.65	64.18	-9.82	74.00	167	178	Peak
3		5173.810	122.92	0.68	123.60	N/A	N/A	167	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

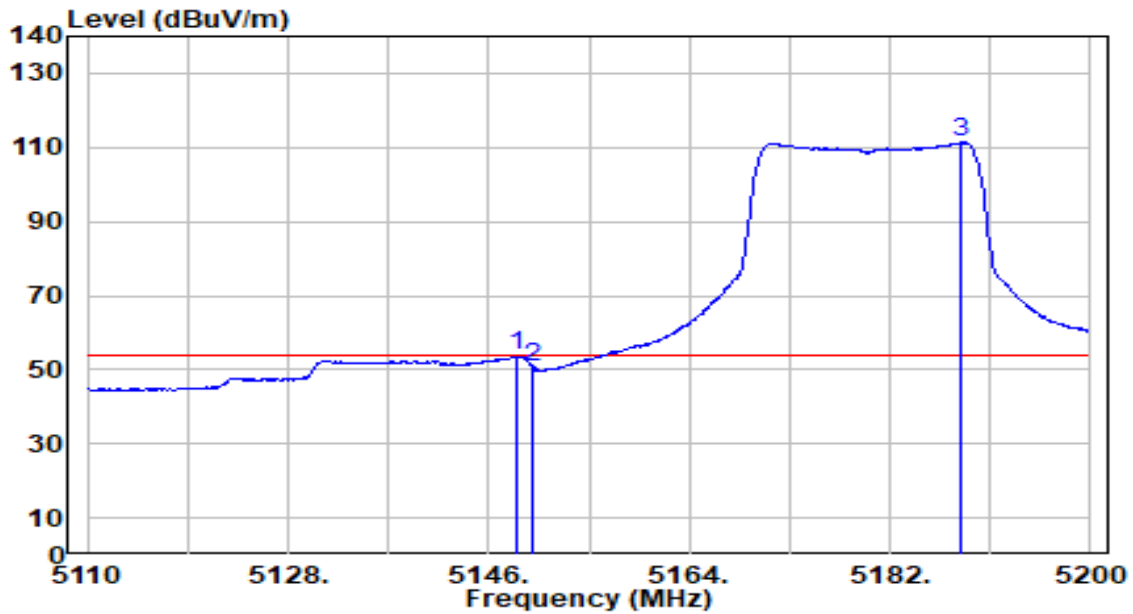


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.610	53.07	0.65	53.73	-0.27	54.00	167	178	Average
2		5150.000	50.01	0.65	50.67	-3.33	54.00	167	178	Average
3		5188.390	110.55	0.69	111.24	N/A	N/A	167	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

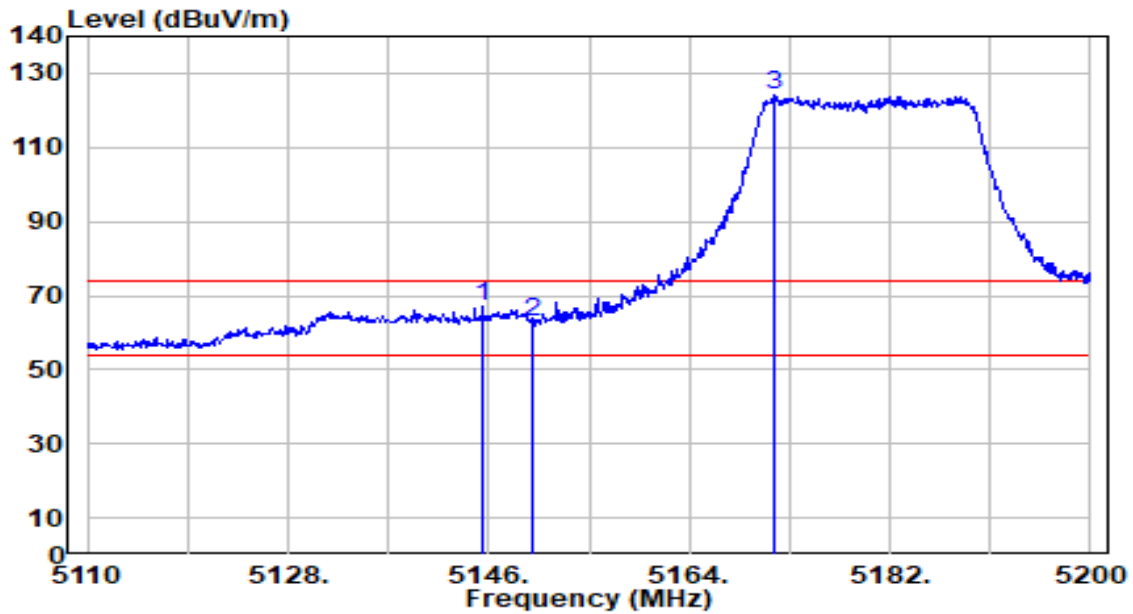


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.460	66.39	0.65	67.04	-6.96	74.00	158	180	Peak
2		5150.000	61.99	0.65	62.65	-11.35	74.00	158	180	Peak
3		5171.560	123.48	0.67	124.16	N/A	N/A	158	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

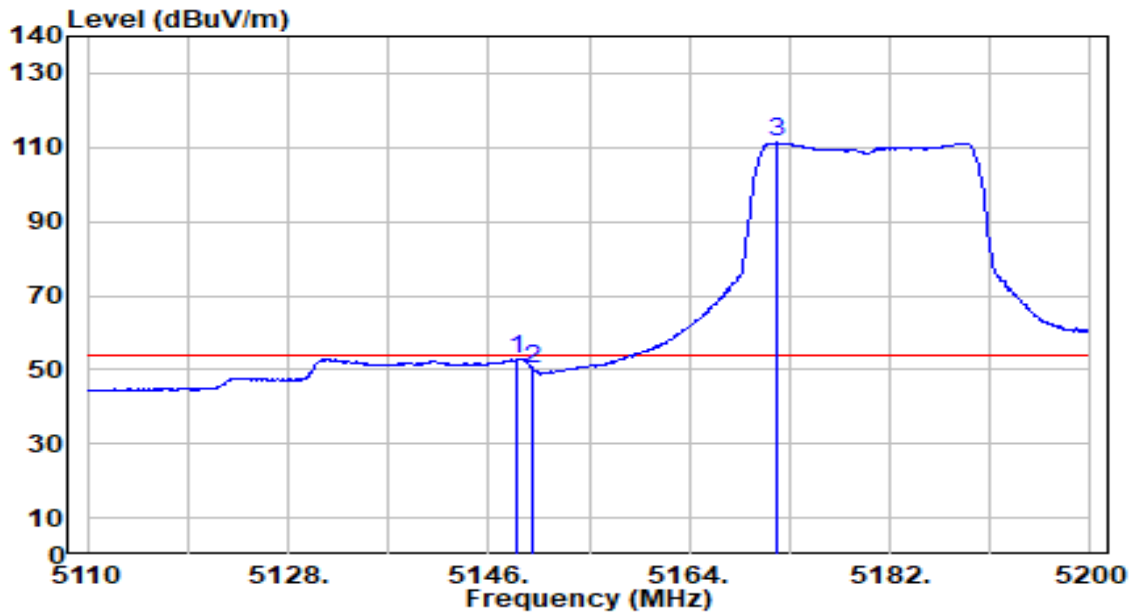


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.520	52.22	0.65	52.87	-1.13	54.00	158	180	Average
2		5150.000	49.45	0.65	50.11	-3.89	54.00	158	180	Average
3		5171.920	110.57	0.68	111.24	N/A	N/A	158	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplicifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

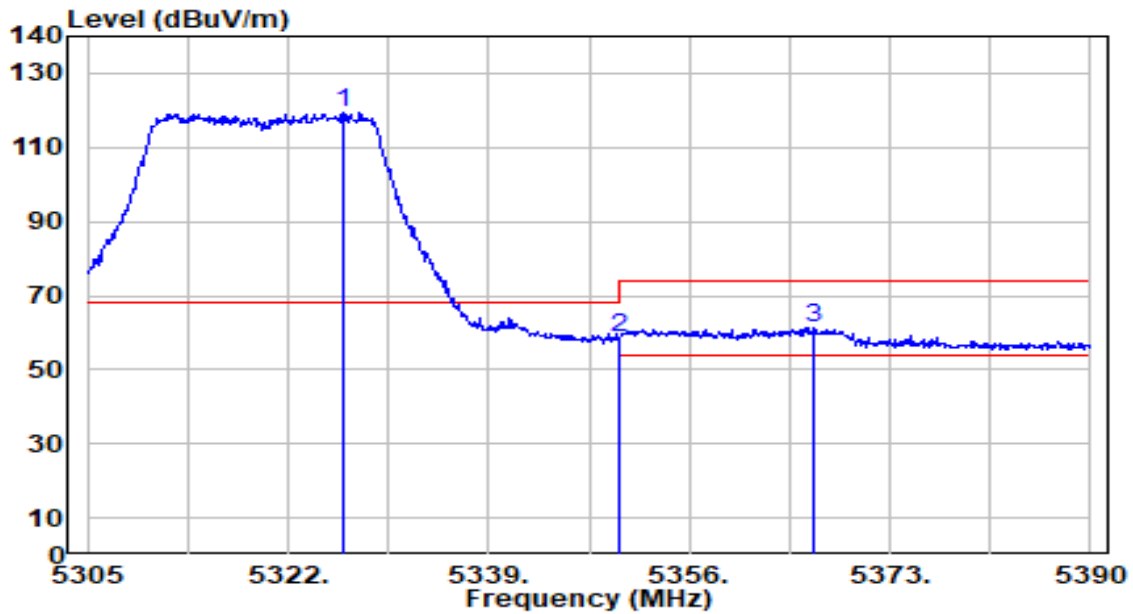


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.675	119.08	0.51	119.58	N/A	N/A	190	179	Peak
2	5350.000	58.04	0.47	58.51	-15.49	74.00	190	179	Peak
3	* 5366.455	61.00	0.45	61.45	-12.55	74.00	190	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

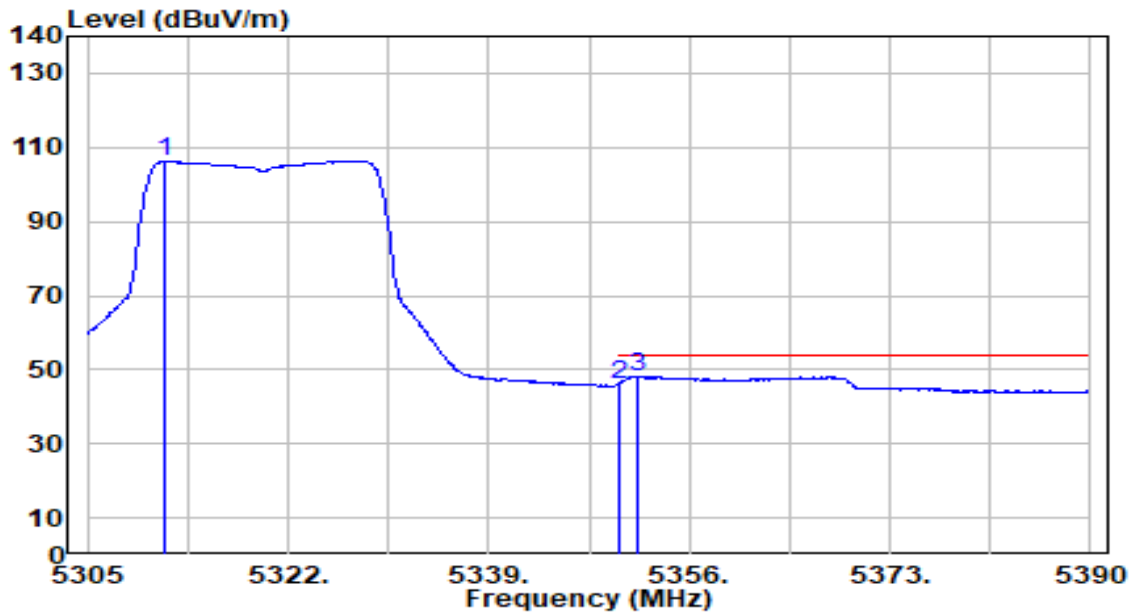


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.460	105.78	0.53	106.31	N/A	N/A	190	179	Average
2	5350.000	45.55	0.47	46.02	-7.98	54.00	190	179	Average
3	* 5351.665	47.68	0.47	48.15	-5.85	54.00	190	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

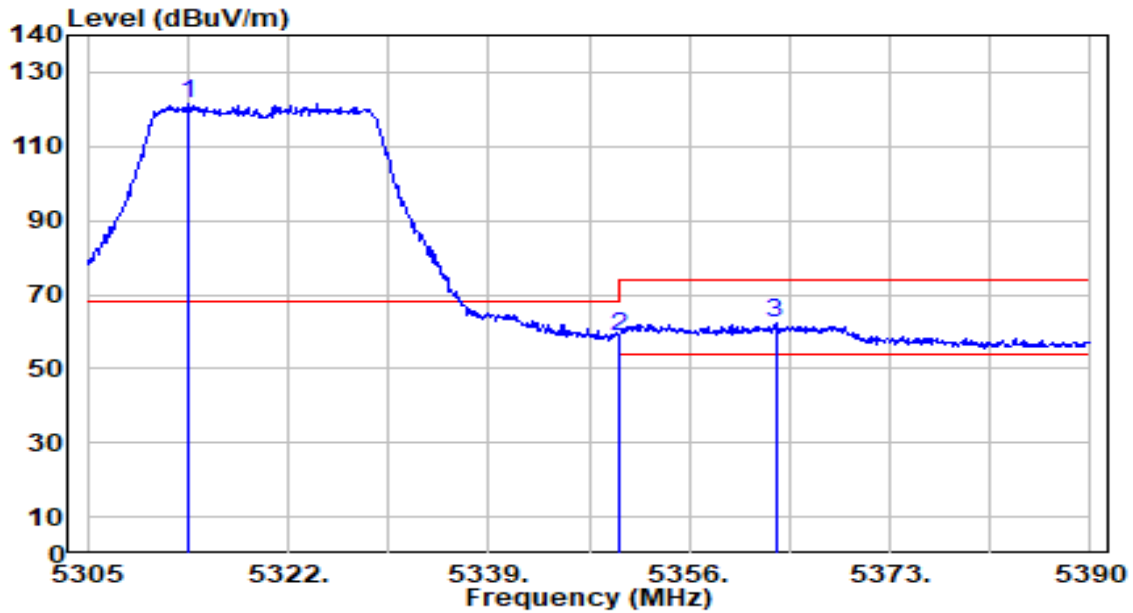


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.585	120.82	0.53	121.34	N/A	N/A	152	178	Peak
2	5350.000	58.08	0.47	58.55	-15.45	74.00	152	178	Peak
3	* 5363.310	61.65	0.45	62.10	-11.90	74.00	152	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

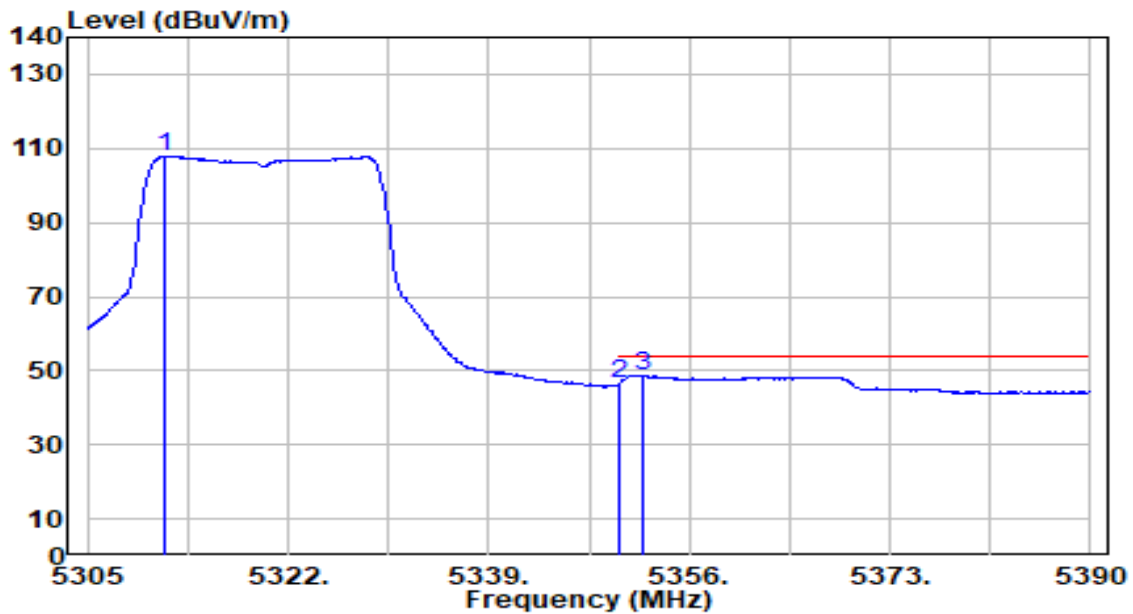


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.460	107.27	0.53	107.81	N/A	N/A	152	178	Average
2	5350.000	45.90	0.47	46.37	-7.63	54.00	152	178	Average
3	* 5352.005	48.26	0.47	48.73	-5.27	54.00	152	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

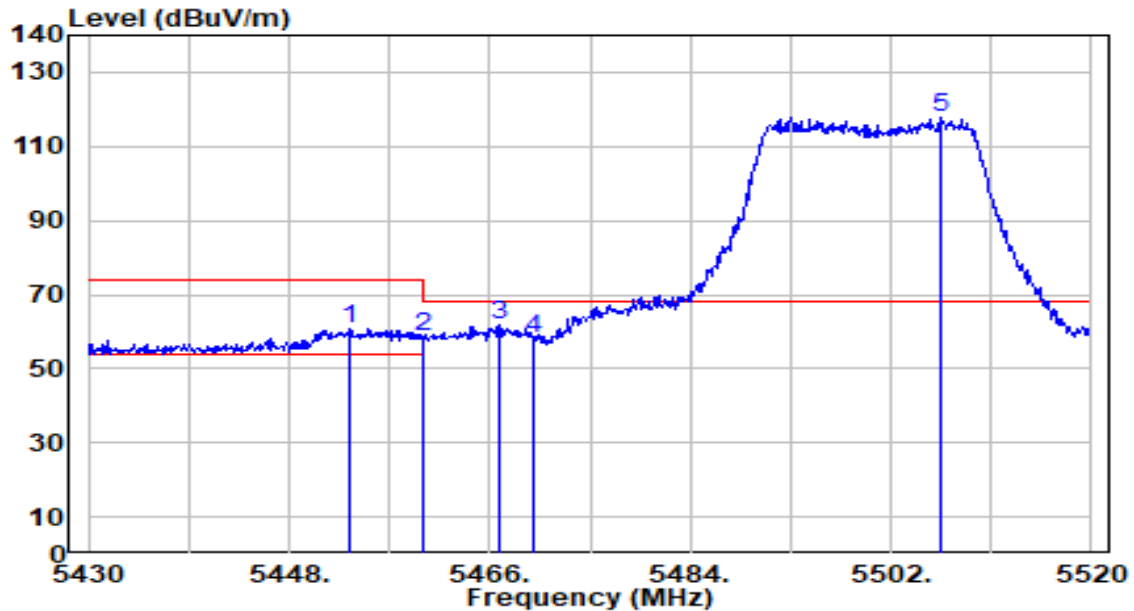


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.490	60.29	0.63	60.93	-13.07	74.00	198	186	Peak
2	5460.000	58.12	0.66	58.78	-15.22	74.00	198	186	Peak
3	* 5466.810	61.06	0.69	61.75	-6.45	68.20	198	186	Peak
4	5470.000	57.51	0.71	58.22	-9.98	68.20	198	186	Peak
5	5506.410	117.14	0.87	118.01	N/A	N/A	198	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

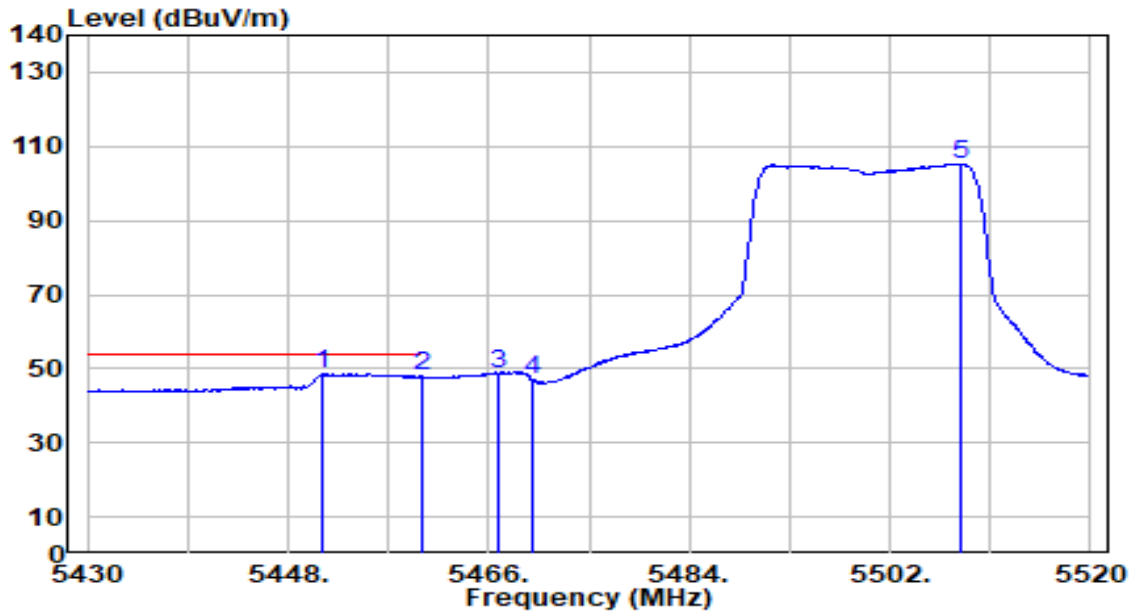


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.060	47.92	0.62	48.54	-5.46	54.00	198	186	Average
2		5460.000	47.15	0.66	47.82	-6.18	54.00	198	186	Average
3		5466.810	48.04	0.69	48.73	N/A	N/A	198	186	Average
4		5470.000	46.17	0.71	46.88	N/A	N/A	198	186	Average
5		5508.300	104.23	0.88	105.11	N/A	N/A	198	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

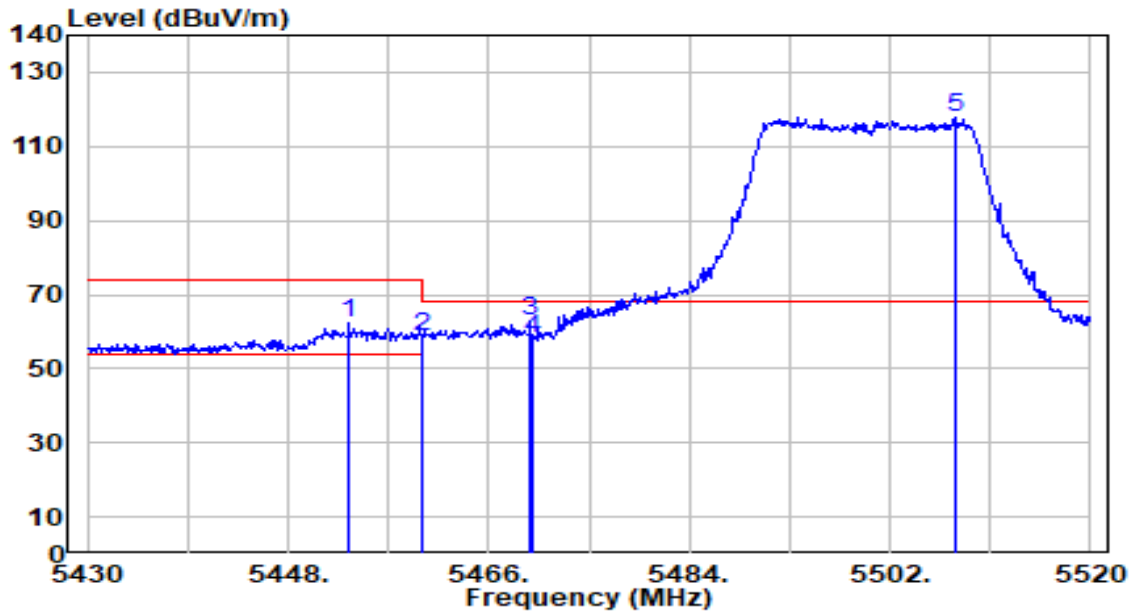


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.400	61.76	0.63	62.39	-11.61	74.00	161	184	Peak
2	5460.000	58.12	0.66	58.79	-15.21	74.00	161	184	Peak
3	* 5469.690	62.18	0.70	62.88	-5.32	68.20	161	184	Peak
4	5470.000	57.41	0.71	58.12	-10.08	68.20	161	184	Peak
5	5507.940	117.02	0.88	117.90	N/A	N/A	161	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

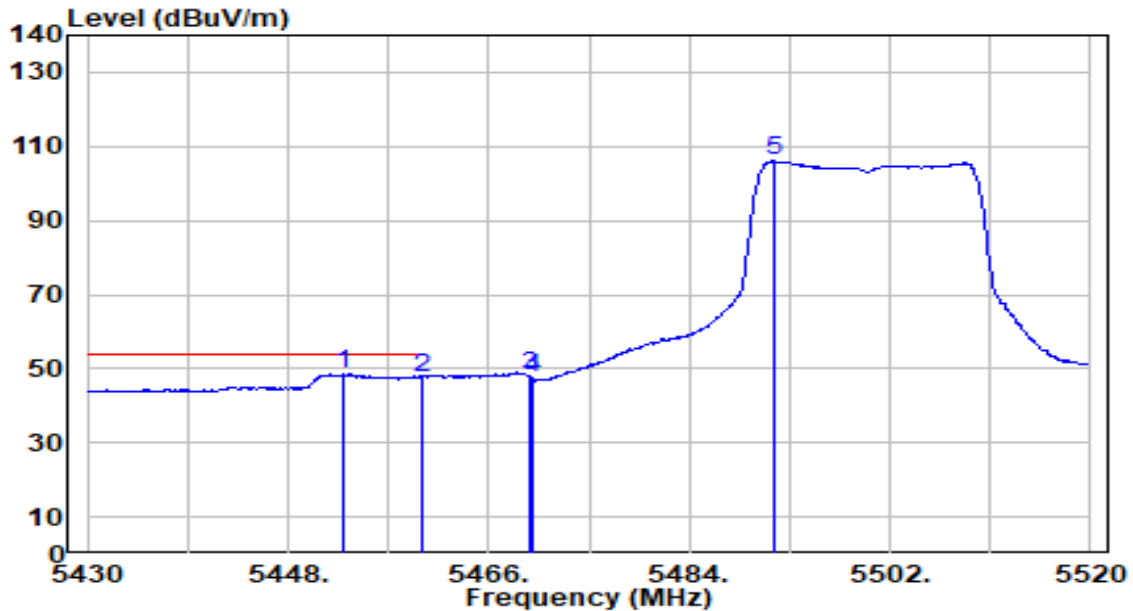


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.950	47.86	0.63	48.49	-5.51	54.00	161	184	Average
2		5460.000	47.03	0.66	47.70	-6.30	54.00	161	184	Average
3		5469.690	47.11	0.70	47.82	N/A	N/A	161	184	Average
4		5470.000	46.63	0.71	47.34	N/A	N/A	161	184	Average
5		5491.650	105.21	0.80	106.01	N/A	N/A	161	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

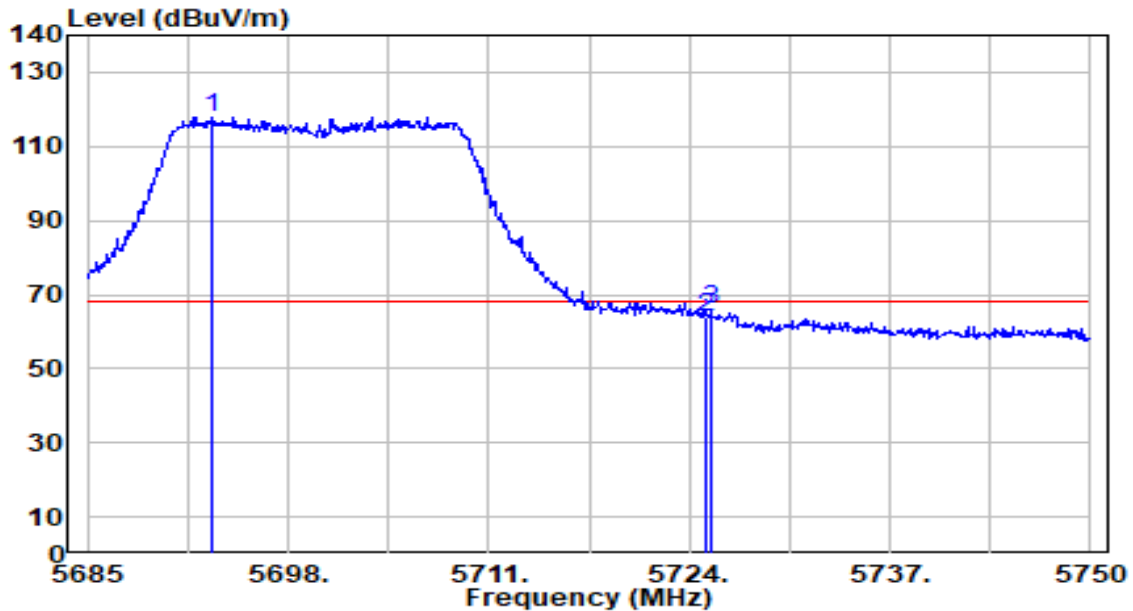


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5693.060	116.21	1.74	117.95	N/A	N/A	170	181	Peak
2	5725.000	62.10	1.89	63.99	-4.21	68.20	170	181	Peak
3	* 5725.430	64.02	1.90	65.91	-2.29	68.20	170	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

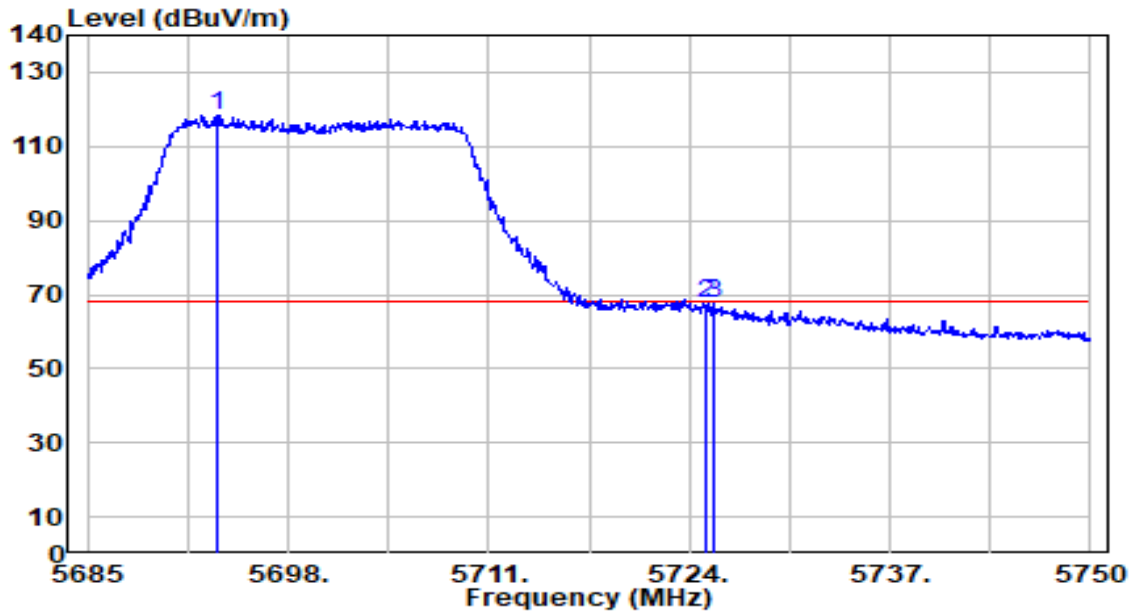


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5693.450	116.49	1.75	118.24	N/A	N/A	193	185	Peak
2	5725.000	65.67	1.89	67.56	-0.64	68.20	193	185	Peak
3	* 5725.560	65.72	1.90	67.61	-0.59	68.20	193	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

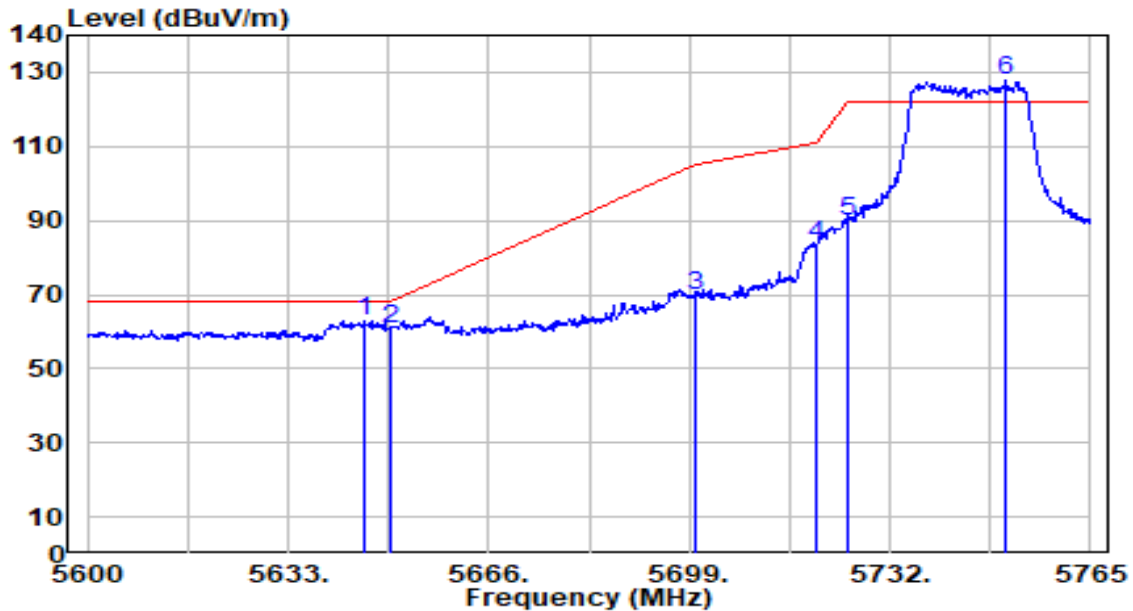


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.705	61.53	1.52	63.06	-5.14	68.20	200	182	Peak
2		5650.000	59.41	1.54	60.95	-7.25	68.20	200	182	Peak
3		5700.000	68.08	1.78	69.86	-35.34	105.20	200	182	Peak
4		5720.000	81.65	1.87	83.52	-27.28	110.80	200	182	Peak
5		5725.000	87.78	1.89	89.67	-32.53	122.20	200	182	Peak
6		5751.140	125.60	2.02	127.61	N/A	N/A	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

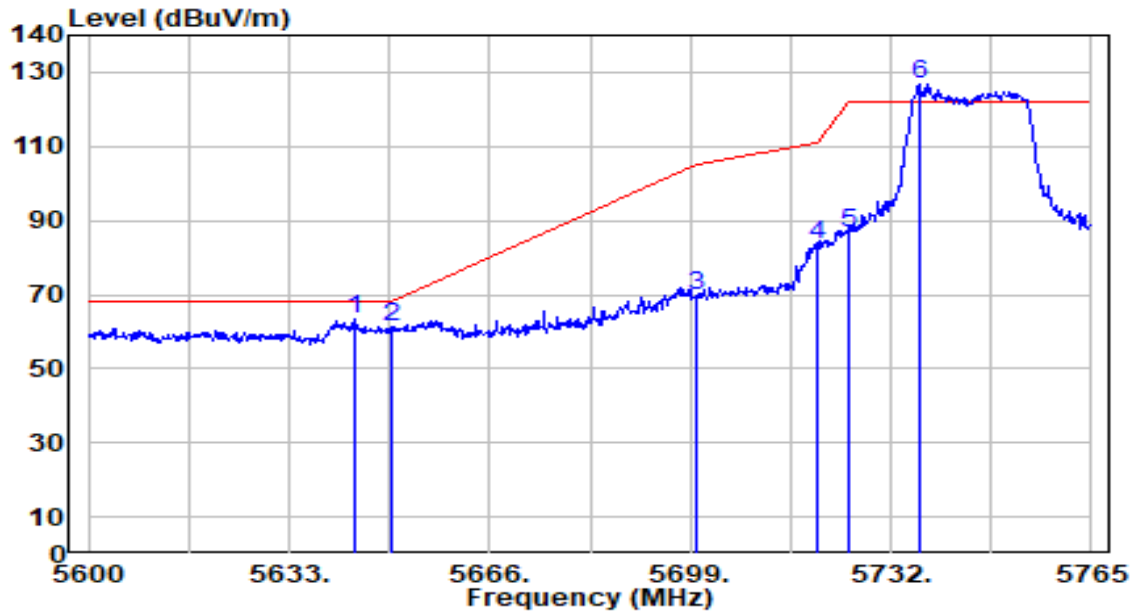


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.890	62.11	1.51	63.63	-4.57	68.20	200	178	Peak
2		5650.000	59.95	1.54	61.50	-6.70	68.20	200	178	Peak
3		5700.000	67.76	1.78	69.53	-35.67	105.20	200	178	Peak
4		5720.000	81.79	1.87	83.66	-27.14	110.80	200	178	Peak
5		5725.000	84.95	1.89	86.84	-35.36	122.20	200	178	Peak
6		5736.620	124.86	1.95	126.81	N/A	N/A	200	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

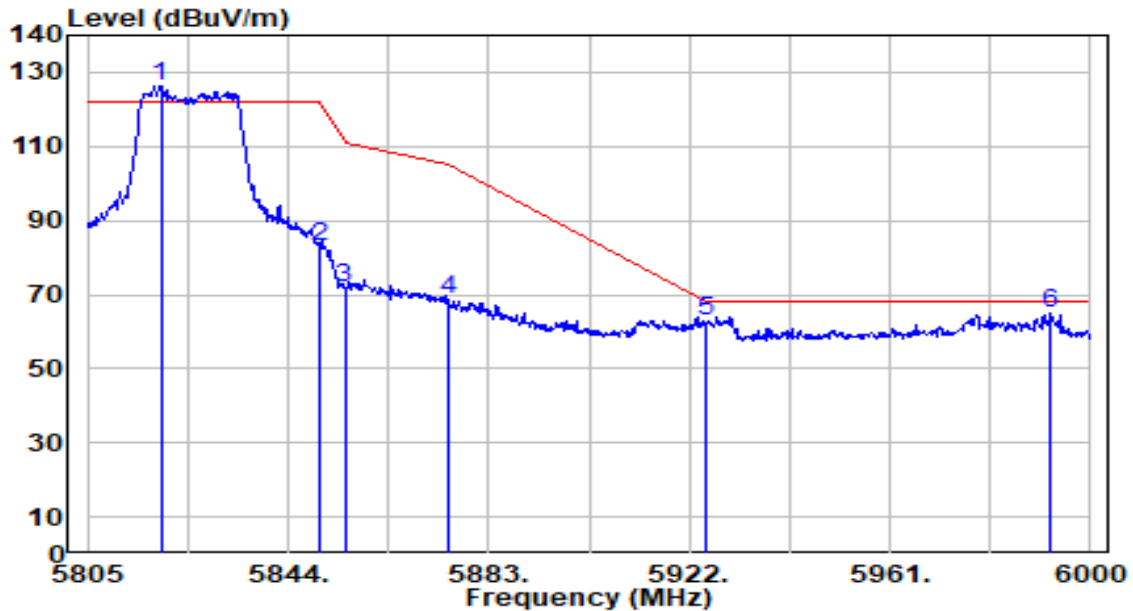


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.235	124.20	2.25	126.45	N/A	N/A	200	182	Peak
2	5850.000	80.93	2.25	83.18	-39.02	122.20	200	182	Peak
3	5855.000	69.64	2.25	71.90	-38.90	110.80	200	182	Peak
4	5875.000	66.68	2.26	68.93	-36.27	105.20	200	182	Peak
5	5925.000	60.66	2.27	62.92	-5.28	68.20	200	182	Peak
6	* 5992.200	62.77	2.28	65.05	-3.15	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

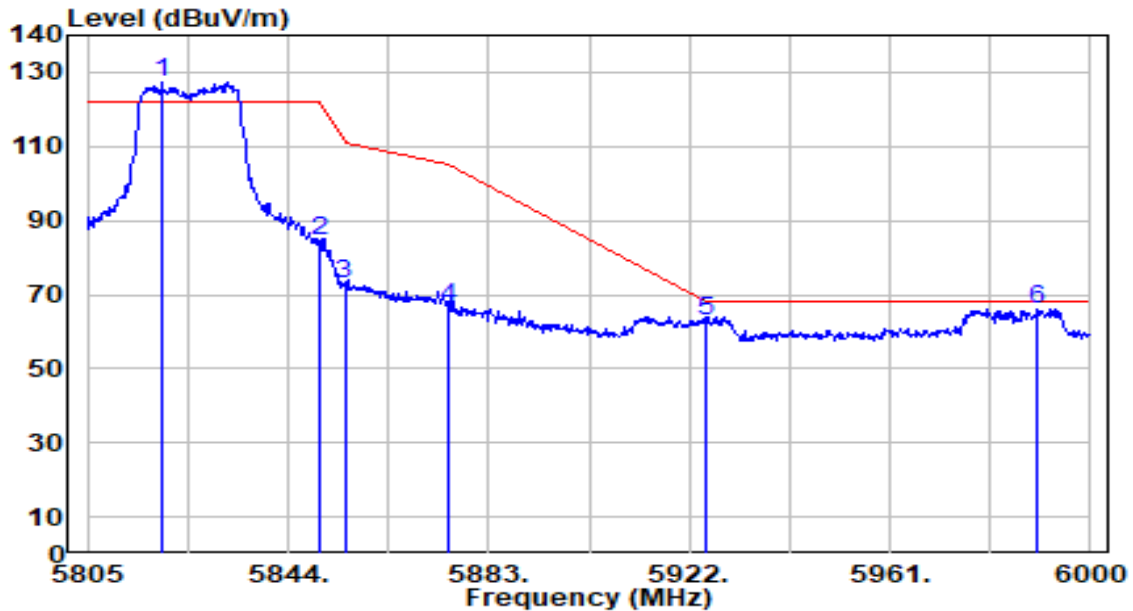


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.430	125.04	2.25	127.28	N/A	N/A	200	192	Peak
2	5850.000	82.06	2.25	84.31	-37.89	122.20	200	192	Peak
3	5855.000	70.62	2.25	72.87	-37.93	110.80	200	192	Peak
4	5875.000	64.13	2.26	66.39	-38.81	105.20	200	192	Peak
5	5925.000	60.72	2.27	62.98	-5.22	68.20	200	192	Peak
6	* 5989.665	63.80	2.28	66.08	-2.12	68.20	200	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

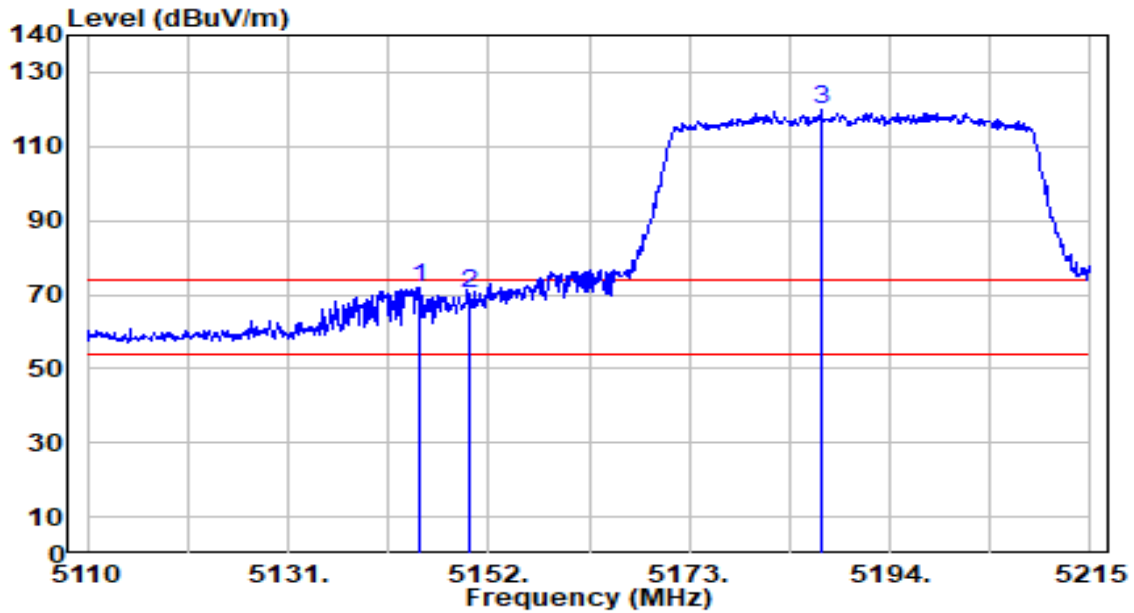


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.650	71.37	0.65	72.02	-1.98	74.00	167	178	Peak
2		5150.000	69.58	0.65	70.24	-3.76	74.00	167	178	Peak
3		5186.755	119.23	0.69	119.92	N/A	N/A	167	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

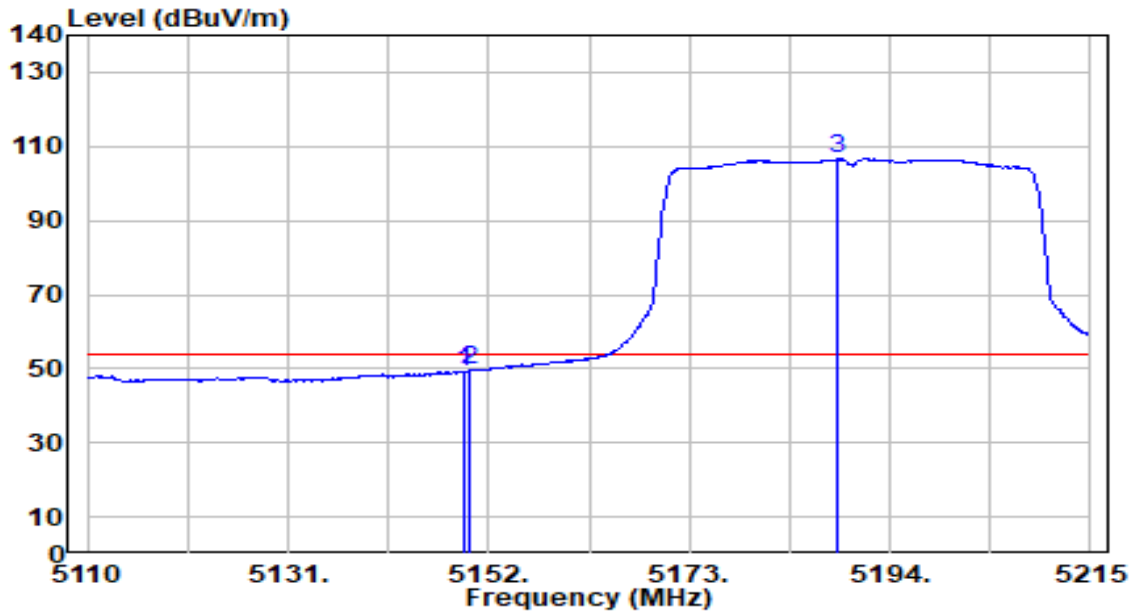


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.375	48.54	0.65	49.20	-4.80	54.00	167	178	Average
2	*	5150.000	48.94	0.65	49.59	-4.41	54.00	167	178	Average
3		5188.435	105.90	0.69	106.59	N/A	N/A	167	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

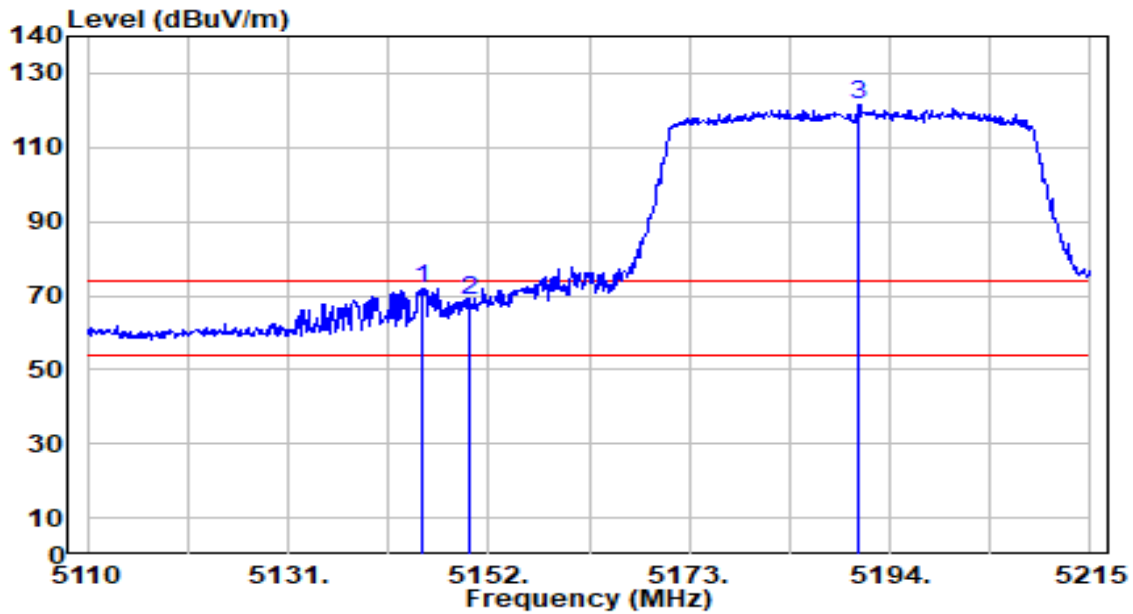


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.070	71.44	0.65	72.09	-1.91	74.00	158	180	Peak
2		5150.000	68.13	0.65	68.79	-5.21	74.00	158	180	Peak
3		5190.745	120.60	0.69	121.29	N/A	N/A	158	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

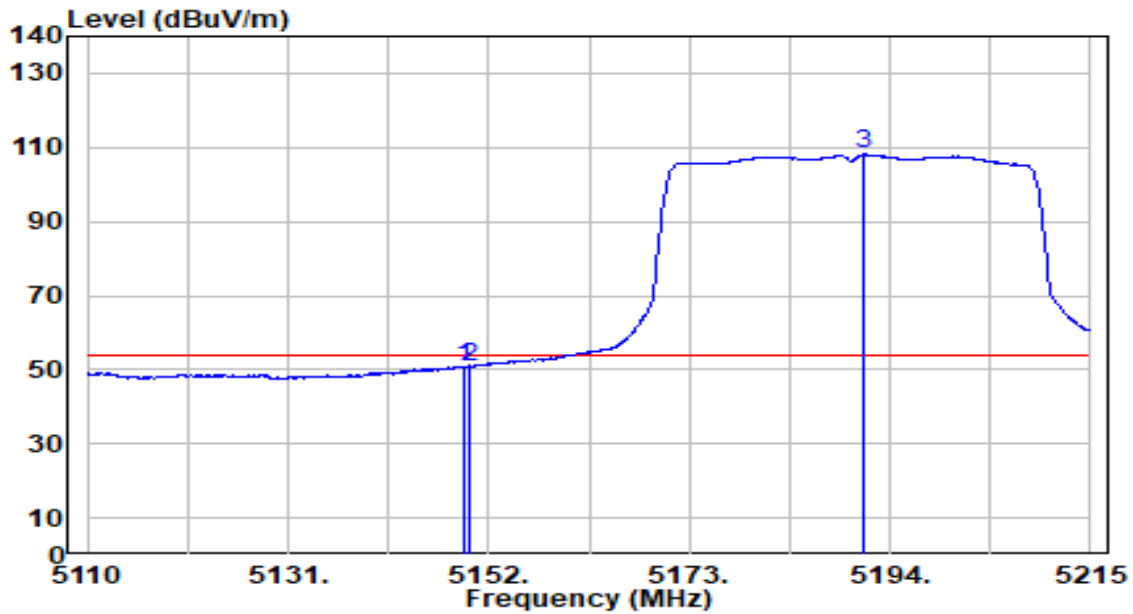


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	50.22	0.65	50.87	-3.13	54.00	158	180	Average
2		5150.000	50.17	0.65	50.83	-3.17	54.00	158	180	Average
3		5191.270	107.40	0.69	108.09	N/A	N/A	158	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

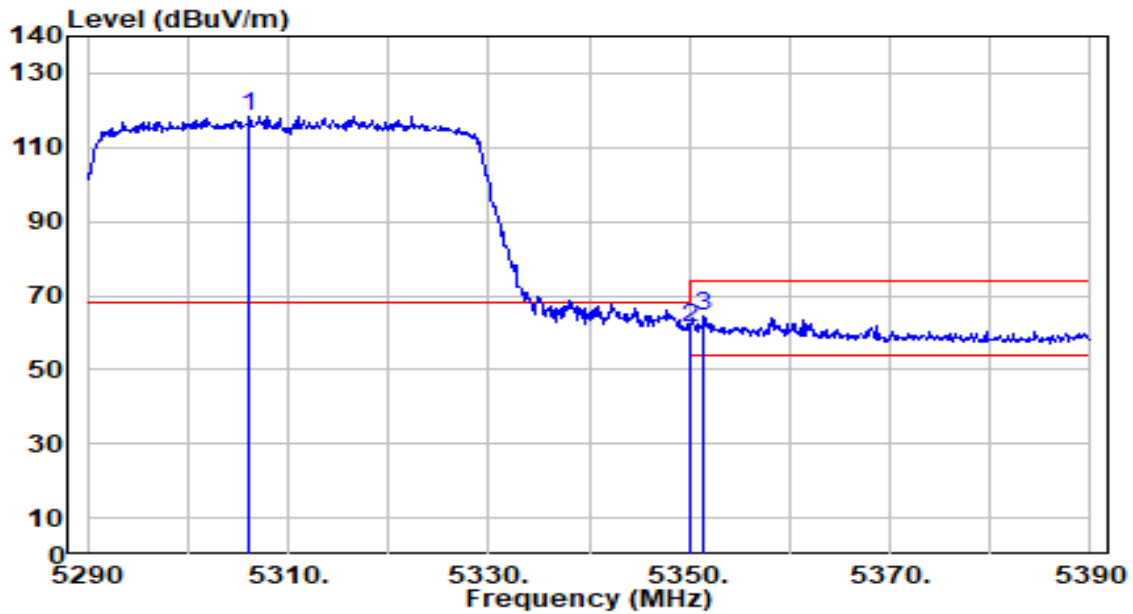


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.200	117.96	0.54	118.49	N/A	N/A	190	179	Peak
2	5350.000	61.05	0.47	61.52	-12.48	74.00	190	179	Peak
3	* 5351.500	63.73	0.47	64.20	-9.80	74.00	190	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

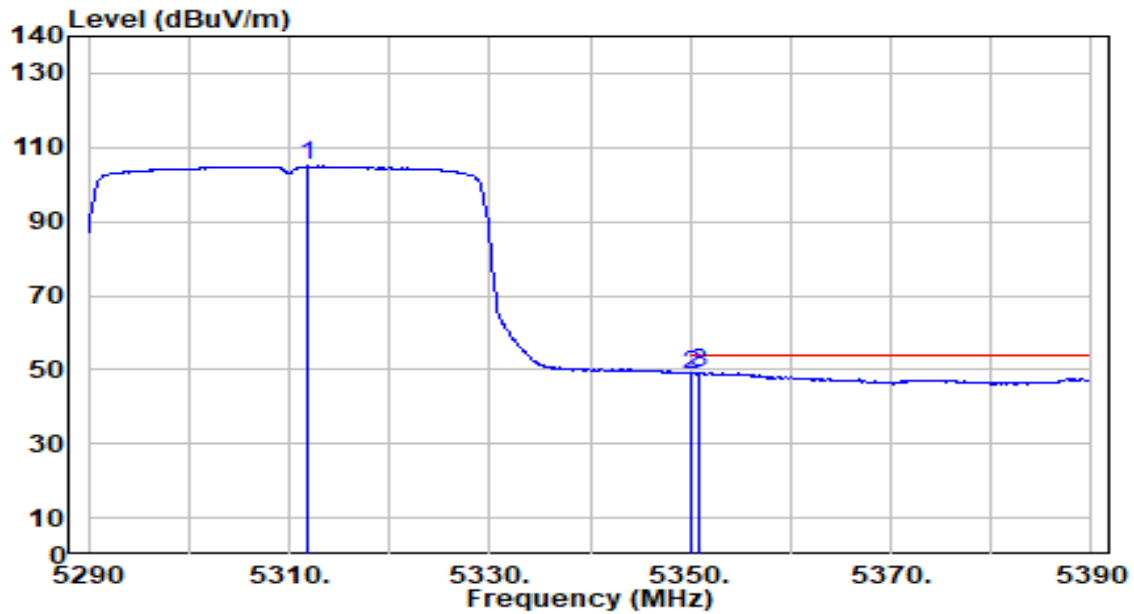


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.900	104.38	0.53	104.91	N/A	N/A	190	179	Average
2	5350.000	48.35	0.47	48.82	-5.18	54.00	190	179	Average
3	* 5351.000	48.77	0.47	49.24	-4.76	54.00	190	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

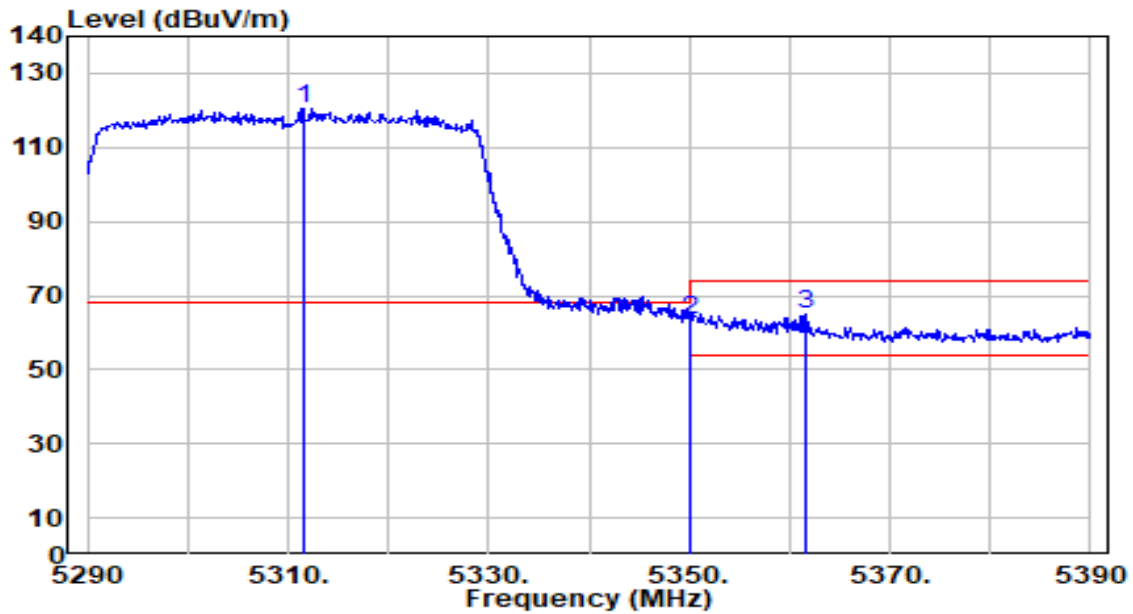


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.600	120.01	0.53	120.54	N/A	N/A	152	178	Peak
2	5350.000	63.09	0.47	63.56	-10.44	74.00	152	178	Peak
3	* 5361.500	64.67	0.45	65.12	-8.88	74.00	152	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

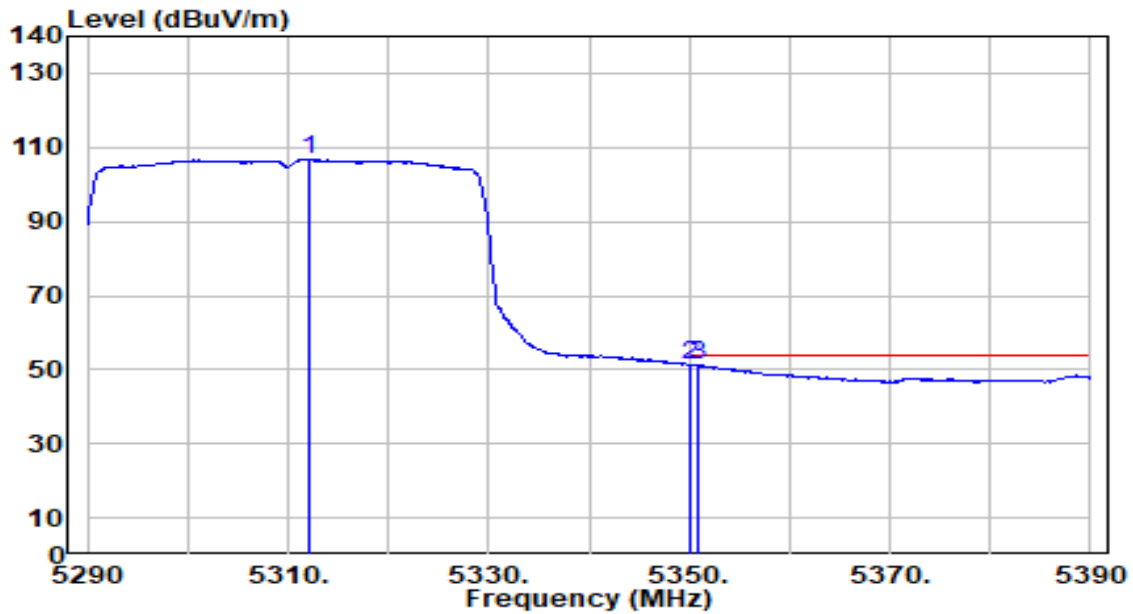


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5312.200	106.12	0.53	106.65	N/A	N/A	152	178	Average
2	*	5350.000	50.81	0.47	51.28	-2.72	54.00	152	178	Average
3		5351.000	50.65	0.47	51.12	-2.88	54.00	152	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

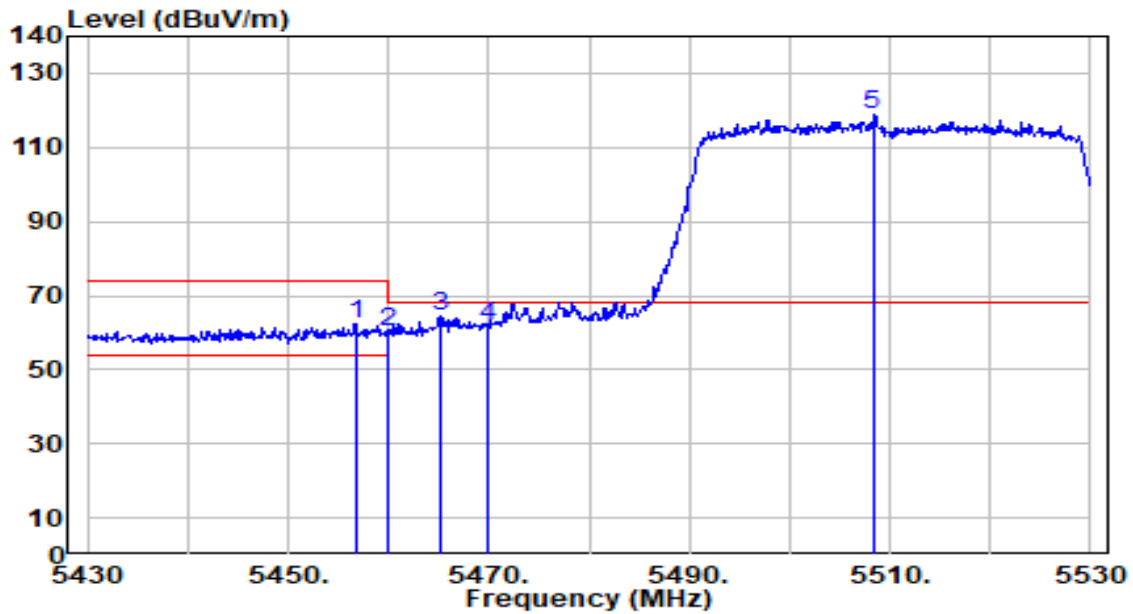


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.700	61.58	0.65	62.22	-11.78	74.00	198	186	Peak
2	5460.000	59.73	0.66	60.39	-13.61	74.00	198	186	Peak
3	* 5465.100	63.58	0.68	64.27	-3.93	68.20	198	186	Peak
4	5470.000	60.98	0.71	61.68	-6.52	68.20	198	186	Peak
5	5508.300	117.76	0.88	118.64	N/A	N/A	198	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

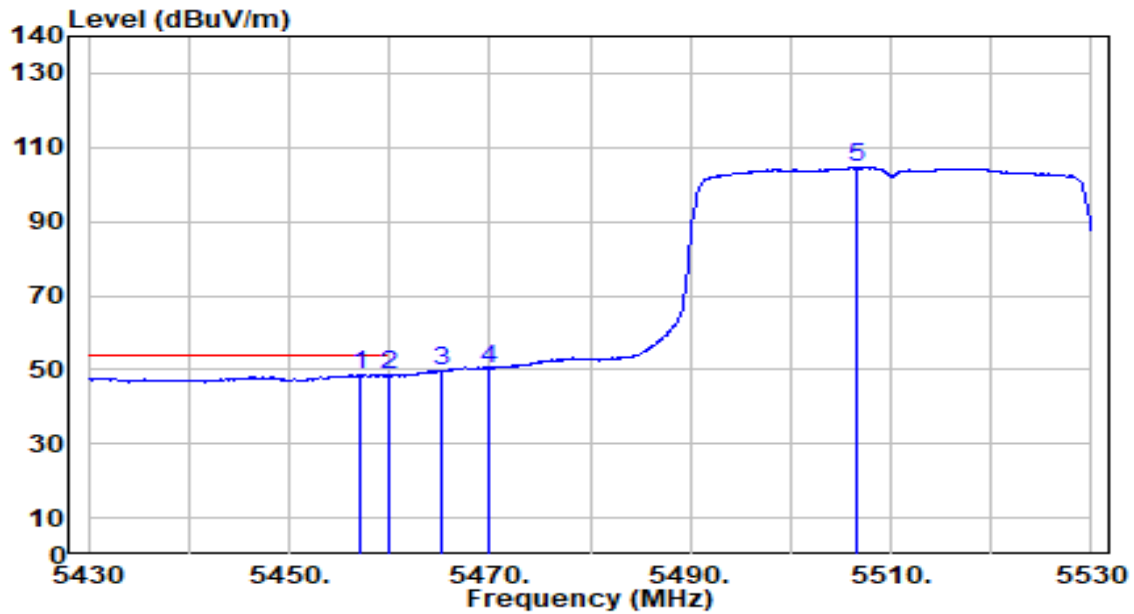


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.000	47.99	0.65	48.63	-5.37	54.00	198	186	Average
2		5460.000	47.74	0.66	48.40	-5.60	54.00	198	186	Average
3		5465.100	49.04	0.68	49.72	N/A	N/A	198	186	Average
4		5470.000	49.74	0.71	50.44	N/A	N/A	198	186	Average
5		5506.600	103.58	0.87	104.45	N/A	N/A	198	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

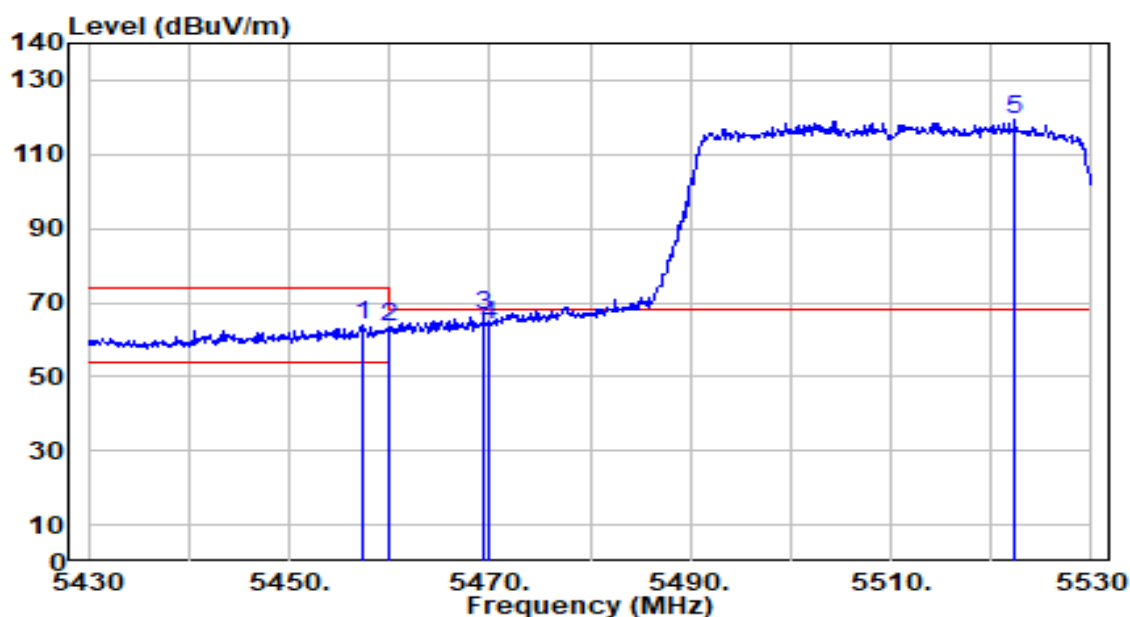


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.400	63.21	0.65	63.86	-10.14	74.00	161	184	Peak
2	5460.000	62.56	0.66	63.22	-10.78	74.00	161	184	Peak
3	* 5469.400	65.83	0.70	66.53	-1.67	68.20	161	184	Peak
4	5470.000	63.16	0.71	63.86	-4.34	68.20	161	184	Peak
5	5522.400	118.24	0.94	119.19	N/A	N/A	161	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

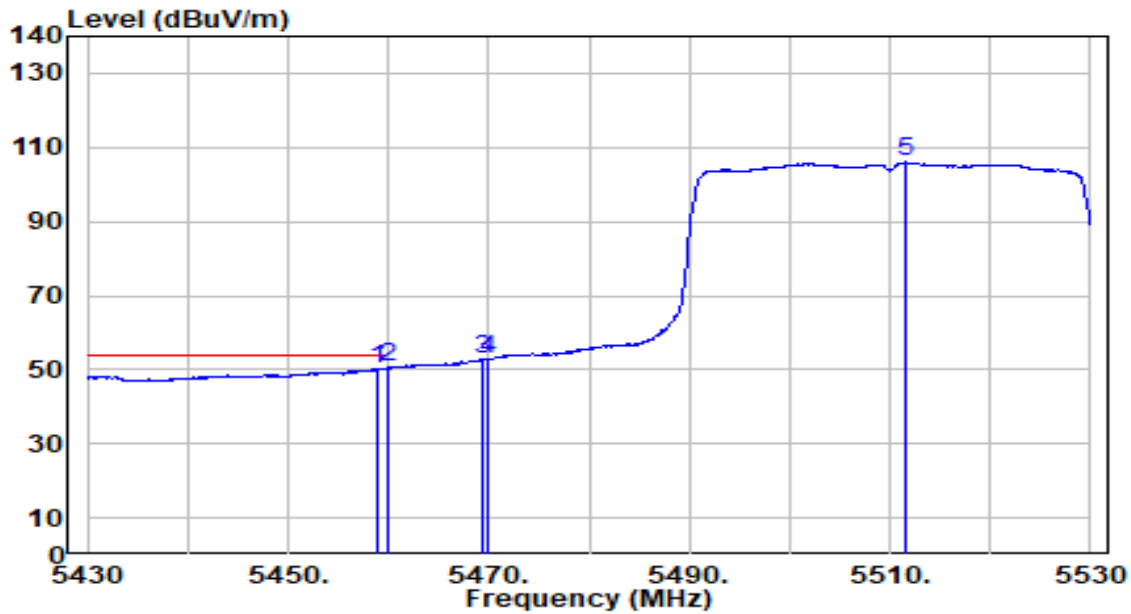


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5459.000	49.71	0.66	50.37	-3.63	54.00	161	184	Average
2	*	5460.000	49.89	0.66	50.55	-3.45	54.00	161	184	Average
3		5469.400	51.92	0.70	52.62	N/A	N/A	161	184	Average
4		5470.000	52.07	0.71	52.78	N/A	N/A	161	184	Average
5		5511.500	105.05	0.89	105.94	N/A	N/A	161	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

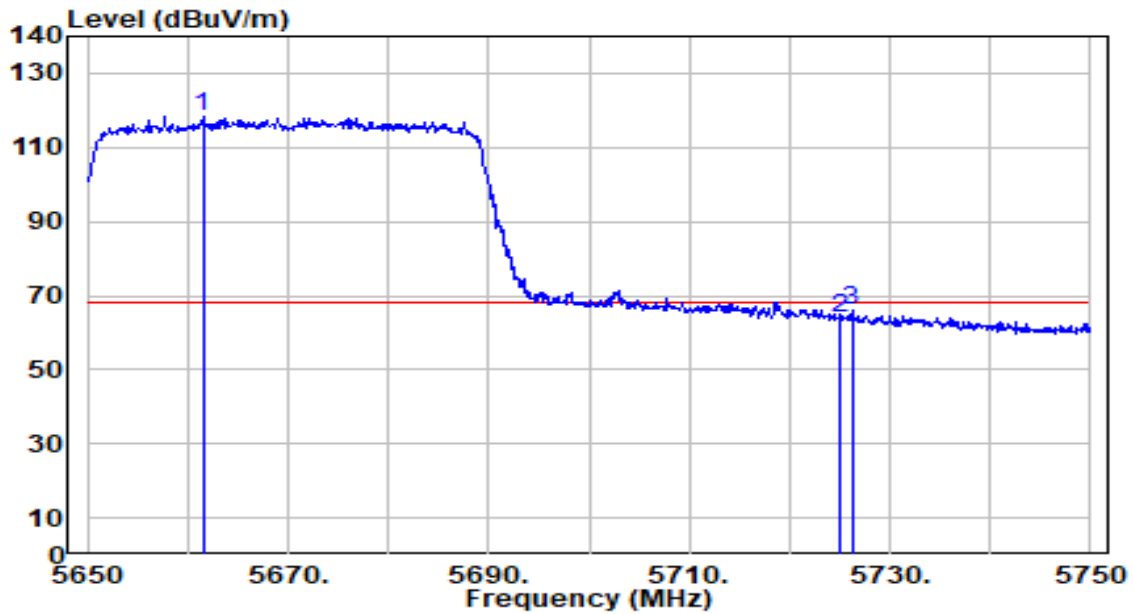


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5661.500	116.92	1.60	118.52	N/A	N/A	170	181	Peak
2	5725.000	62.21	1.89	64.11	-4.09	68.20	170	181	Peak
3	* 5726.200	64.34	1.90	66.24	-1.96	68.20	170	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

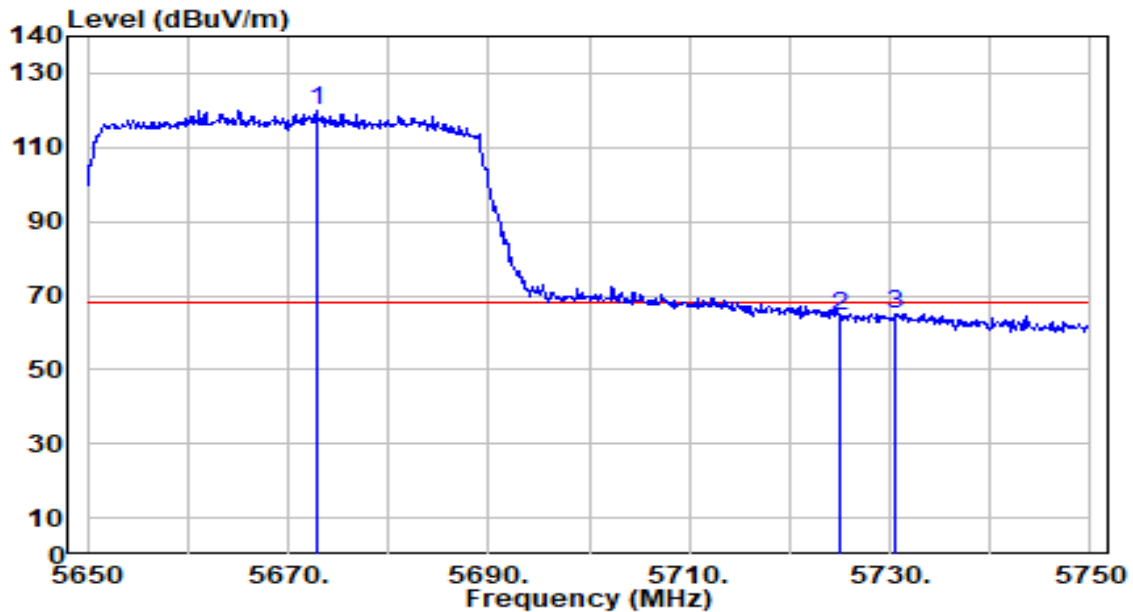


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5672.800	118.20	1.65	119.85	N/A	N/A	193	185	Peak
2	5725.000	62.39	1.89	64.28	-3.92	68.20	193	185	Peak
3	* 5730.500	63.31	1.92	65.23	-2.97	68.20	193	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

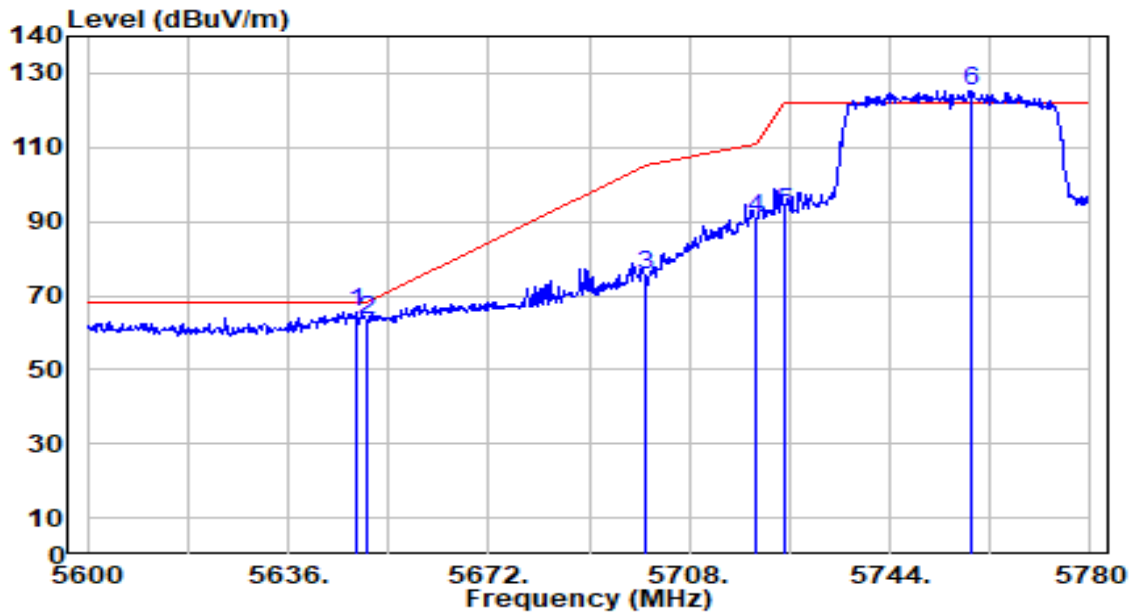


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.060	63.83	1.53	65.36	-2.84	68.20	200	182	Peak
2		5650.000	61.79	1.54	63.33	-4.87	68.20	200	182	Peak
3		5700.000	73.87	1.78	75.64	-29.56	105.20	200	182	Peak
4		5720.000	88.94	1.87	90.81	-19.99	110.80	200	182	Peak
5		5725.000	90.61	1.89	92.51	-29.69	122.20	200	182	Peak
6		5758.400	123.22	2.05	125.27	N/A	N/A	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

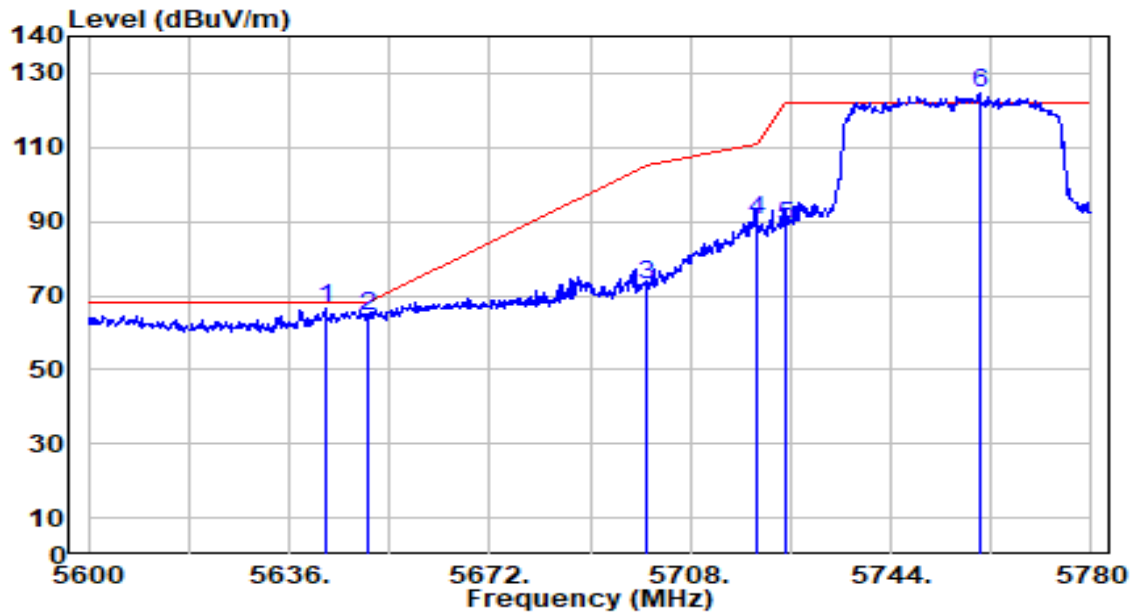


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.480	64.85	1.51	66.36	-1.84	68.20	200	178	Peak
2		5650.000	62.81	1.54	64.35	-3.85	68.20	200	178	Peak
3		5700.000	70.91	1.78	72.68	-32.52	105.20	200	178	Peak
4		5720.000	88.30	1.87	90.17	-20.63	110.80	200	178	Peak
5		5725.000	87.08	1.89	88.97	-33.23	122.20	200	178	Peak
6		5759.840	122.45	2.06	124.51	N/A	N/A	200	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

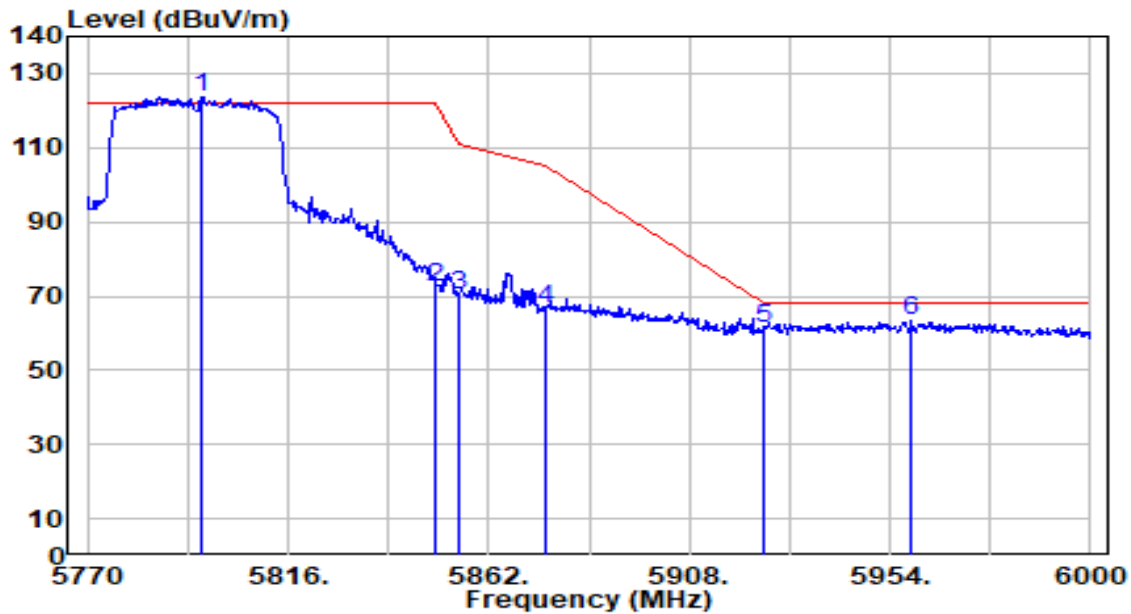


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5796.220	121.65	2.23	123.88	N/A	N/A	200	182	Peak
2	5850.000	70.05	2.25	72.30	-49.90	122.20	200	182	Peak
3	5855.000	68.00	2.25	70.25	-40.55	110.80	200	182	Peak
4	5875.000	64.41	2.26	66.67	-38.53	105.20	200	182	Peak
5	5925.000	58.77	2.27	61.04	-7.16	68.20	200	182	Peak
6	* 5959.060	61.22	2.27	63.49	-4.71	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

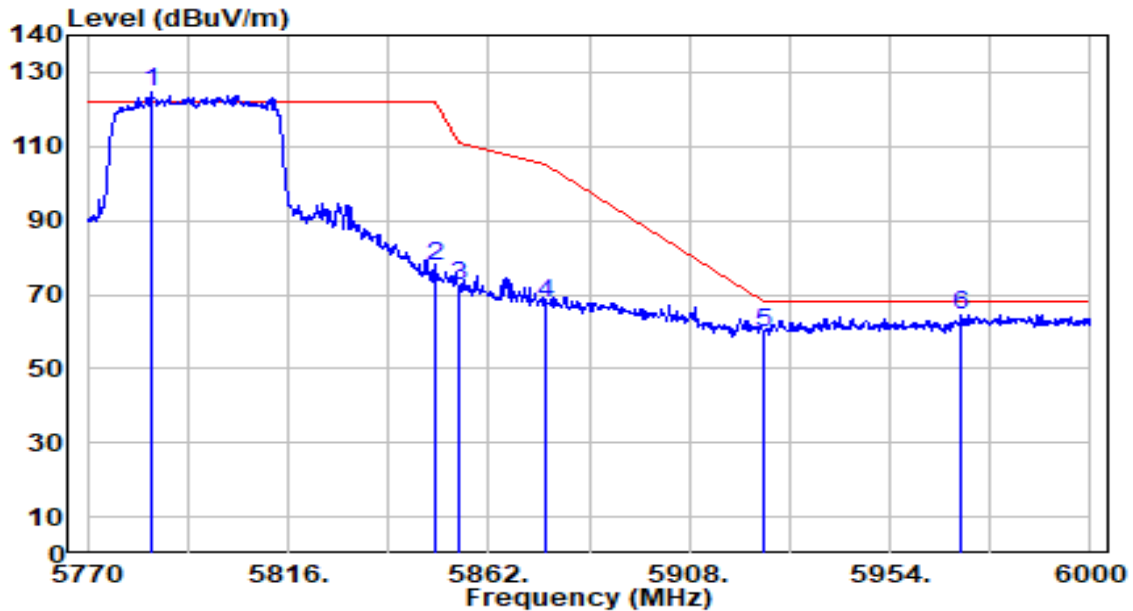


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5784.720	122.26	2.17	124.43	N/A	N/A	200	192	Peak
2	5850.000	75.62	2.25	77.87	-44.33	122.20	200	192	Peak
3	5855.000	70.06	2.25	72.31	-38.49	110.80	200	192	Peak
4	5875.000	65.35	2.26	67.61	-37.59	105.20	200	192	Peak
5	5925.000	57.25	2.27	59.52	-8.68	68.20	200	192	Peak
6	* 5970.330	62.43	2.27	64.70	-3.50	68.20	200	192	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

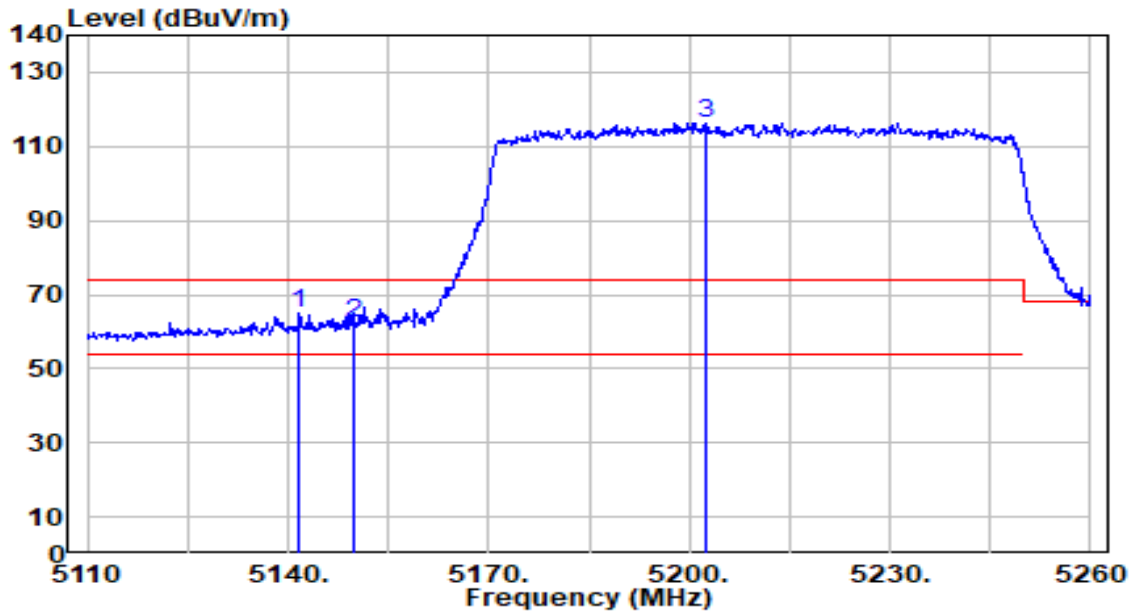


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.650	64.58	0.65	65.23	-8.77	74.00	167	178	Peak
2		5150.000	61.44	0.65	62.10	-11.90	74.00	167	178	Peak
3		5202.550	115.76	0.70	116.46	N/A	N/A	167	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

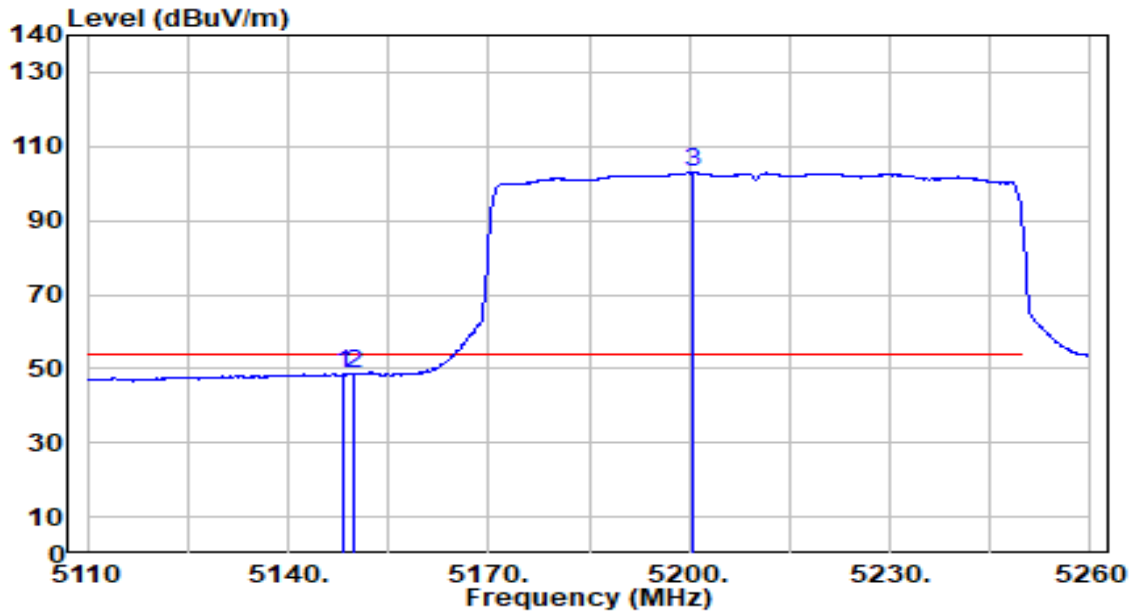


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.100	48.05	0.65	48.70	-5.30	54.00	167	178	Average
2		5150.000	47.90	0.65	48.56	-5.44	54.00	167	178	Average
3		5200.450	102.19	0.70	102.89	N/A	N/A	167	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

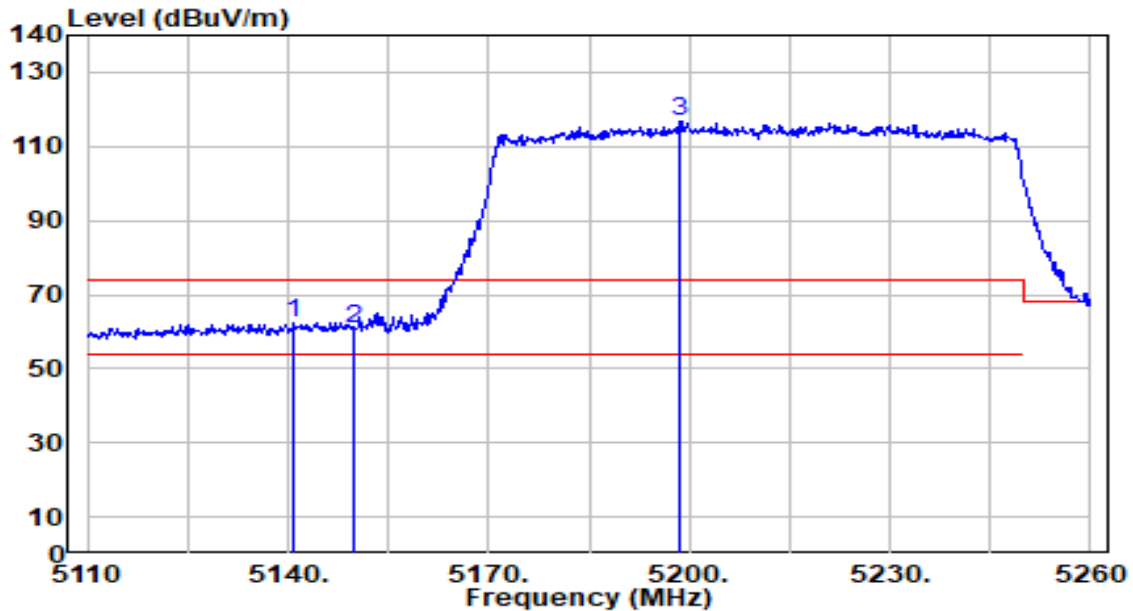


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.750	61.72	0.65	62.36	-11.64	74.00	158	180	Peak
2		5150.000	60.33	0.65	60.98	-13.02	74.00	158	180	Peak
3		5198.650	116.10	0.70	116.80	N/A	N/A	158	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

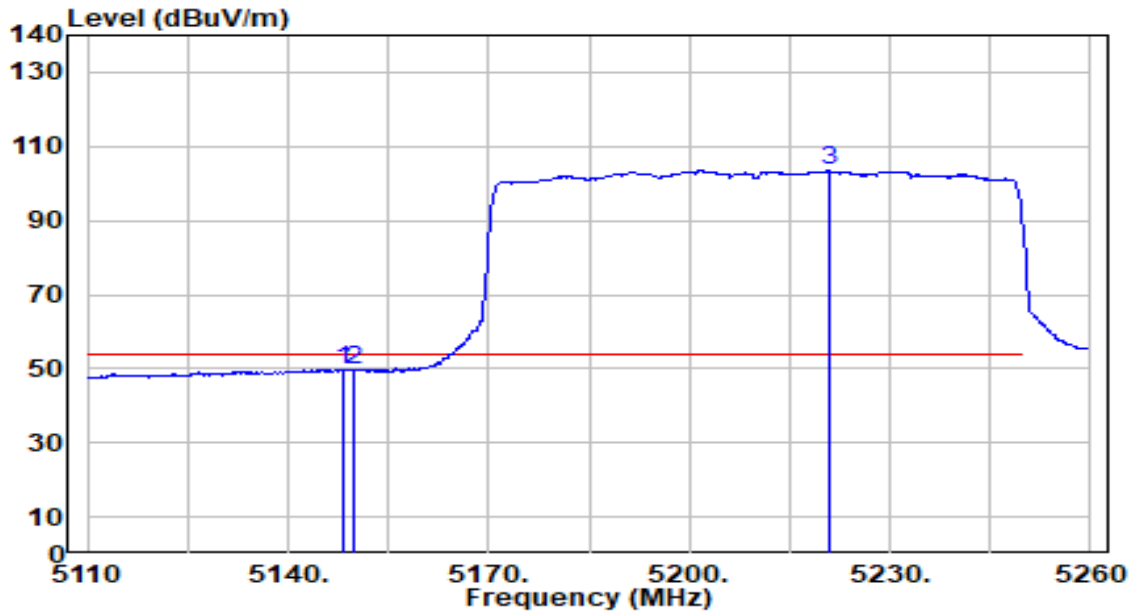


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.100	49.10	0.65	49.76	-4.24	54.00	158	180	Average
2		5150.000	48.90	0.65	49.56	-4.44	54.00	158	180	Average
3		5221.000	102.78	0.67	103.45	N/A	N/A	158	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

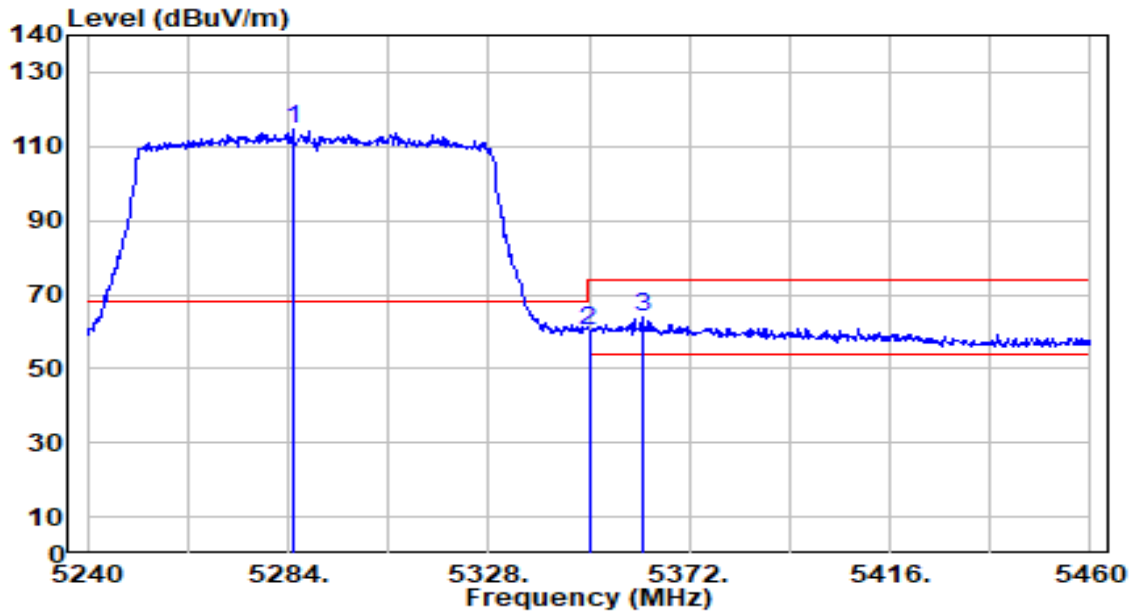


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5285.100	113.95	0.57	114.52	N/A	N/A	198	179	Peak
2	5350.000	59.85	0.47	60.32	-13.68	74.00	198	179	Peak
3	* 5361.660	63.32	0.45	63.77	-10.23	74.00	198	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

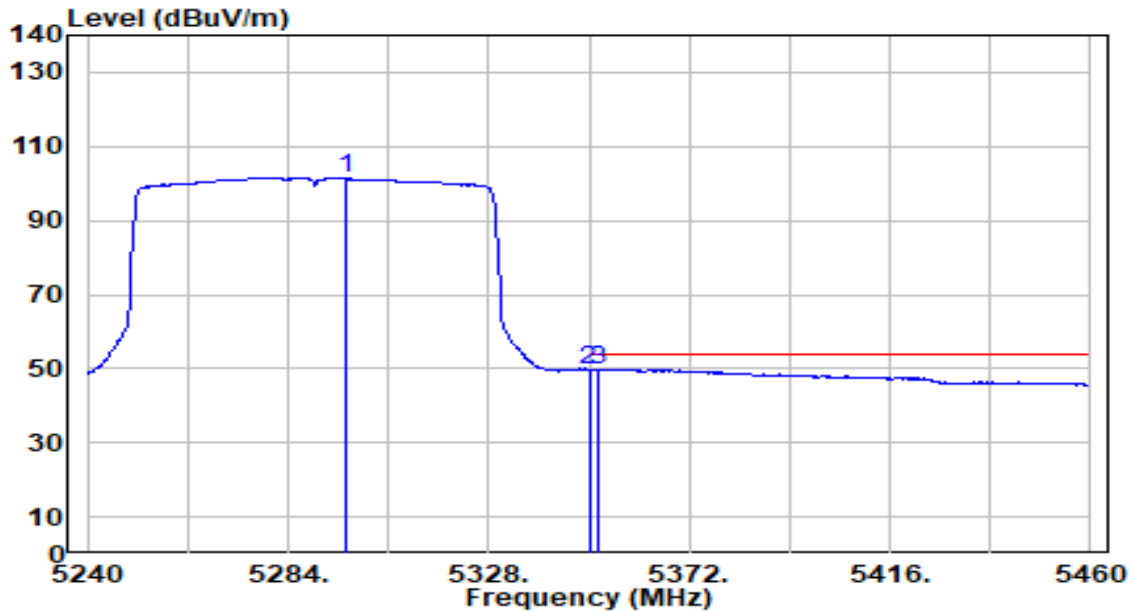


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.540	100.90	0.55	101.46	N/A	N/A	198	179	Average
2	5350.000	49.27	0.47	49.74	-4.26	54.00	198	179	Average
3	* 5351.980	49.38	0.47	49.85	-4.15	54.00	198	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

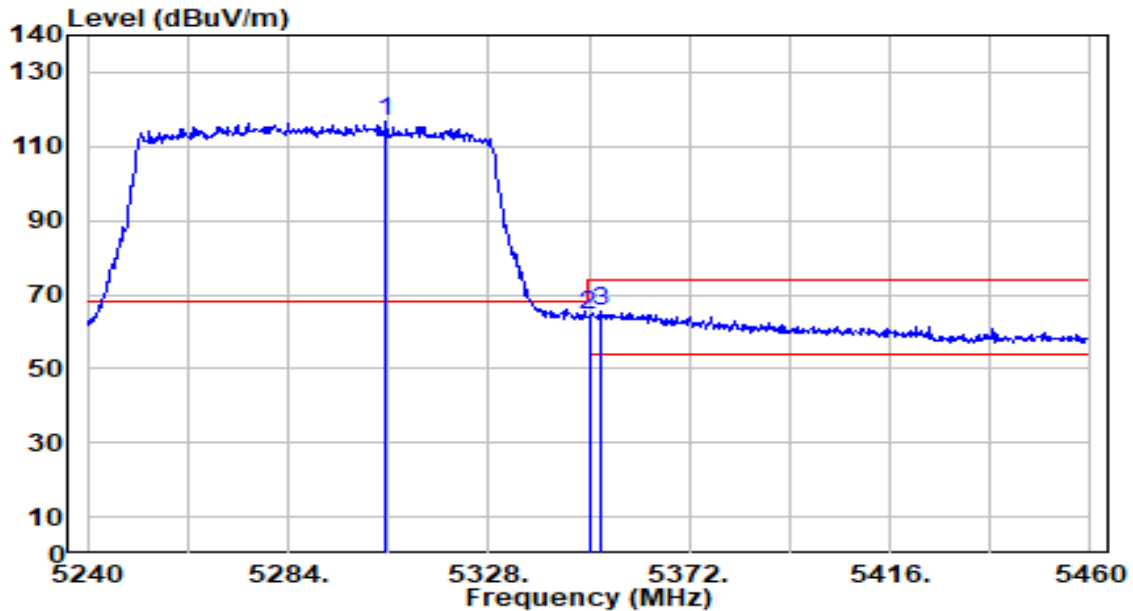


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5305.560	116.18	0.54	116.72	N/A	N/A	152	178	Peak
2	5350.000	64.06	0.47	64.53	-9.47	74.00	152	178	Peak
3	* 5352.860	64.85	0.47	65.32	-8.68	74.00	152	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

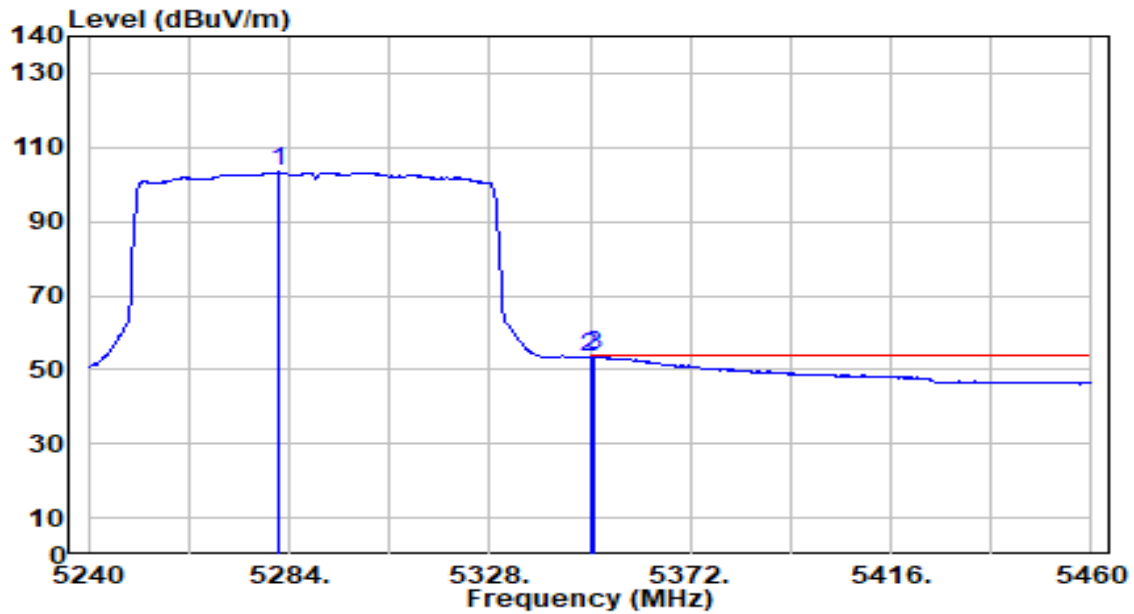


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5281.800	102.72	0.58	103.29	N/A	N/A	152	178	Average
2	5350.000	52.98	0.47	53.45	-0.55	54.00	152	178	Average
3	* 5351.100	53.26	0.47	53.73	-0.27	54.00	152	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

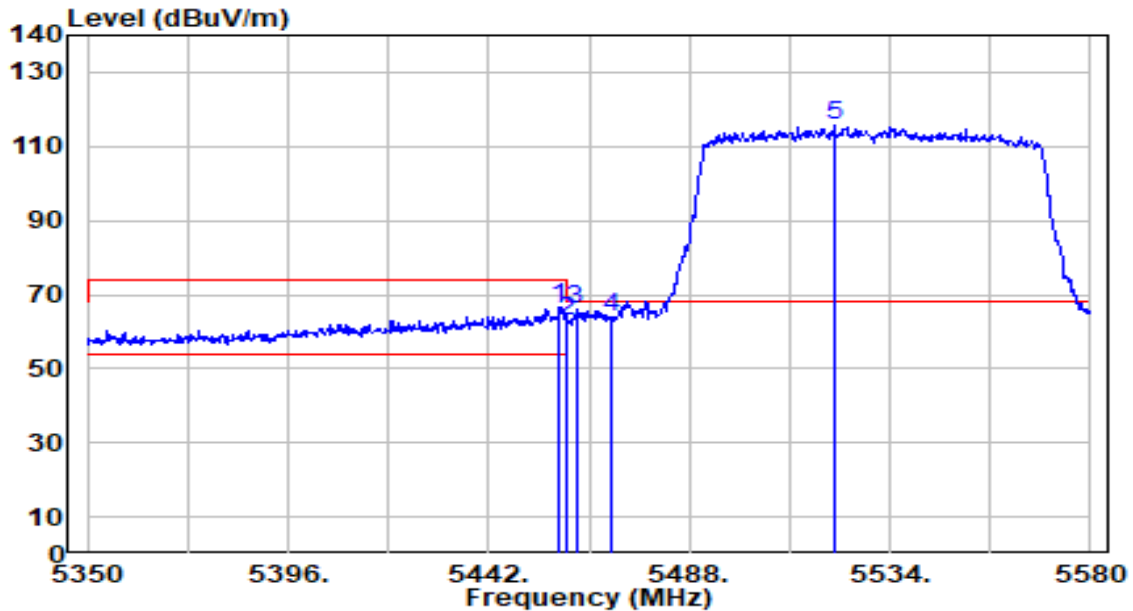


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.330	66.11	0.65	66.77	-7.23	74.00	198	186	Peak
2	5460.000	62.22	0.66	62.88	-11.12	74.00	198	186	Peak
3	* 5462.010	65.33	0.67	66.00	-2.20	68.20	198	186	Peak
4	5470.000	63.29	0.71	64.00	-4.20	68.20	198	186	Peak
5	5521.120	114.66	0.94	115.60	N/A	N/A	198	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

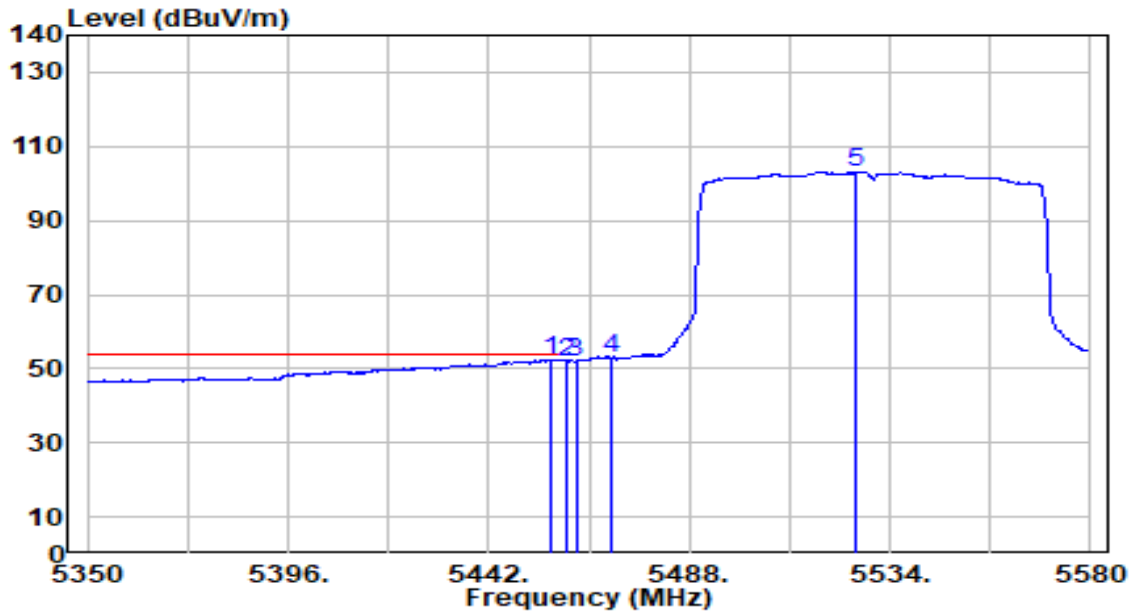


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.260	51.86	0.64	52.51	-1.49	54.00	198	186	Average
2		5460.000	51.33	0.66	52.00	-2.00	54.00	198	186	Average
3		5462.010	51.00	0.67	51.67	N/A	N/A	198	186	Average
4		5470.000	52.08	0.71	52.78	N/A	N/A	198	186	Average
5		5526.180	102.12	0.96	103.08	N/A	N/A	198	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

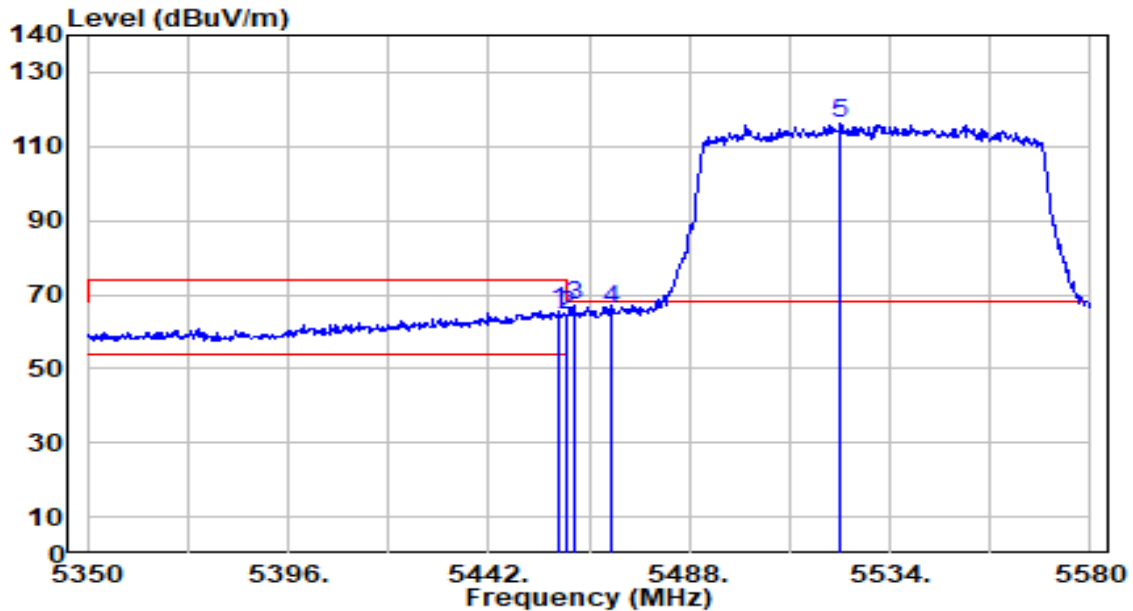


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	64.88	0.65	65.54	-8.46	74.00	161	184	Peak
2	5460.000	63.81	0.66	64.47	-9.53	74.00	161	184	Peak
3	* 5461.550	66.30	0.67	66.97	-1.23	68.20	161	184	Peak
4	5470.000	65.55	0.71	66.25	-1.95	68.20	161	184	Peak
5	5522.730	115.08	0.95	116.03	N/A	N/A	161	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-13
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

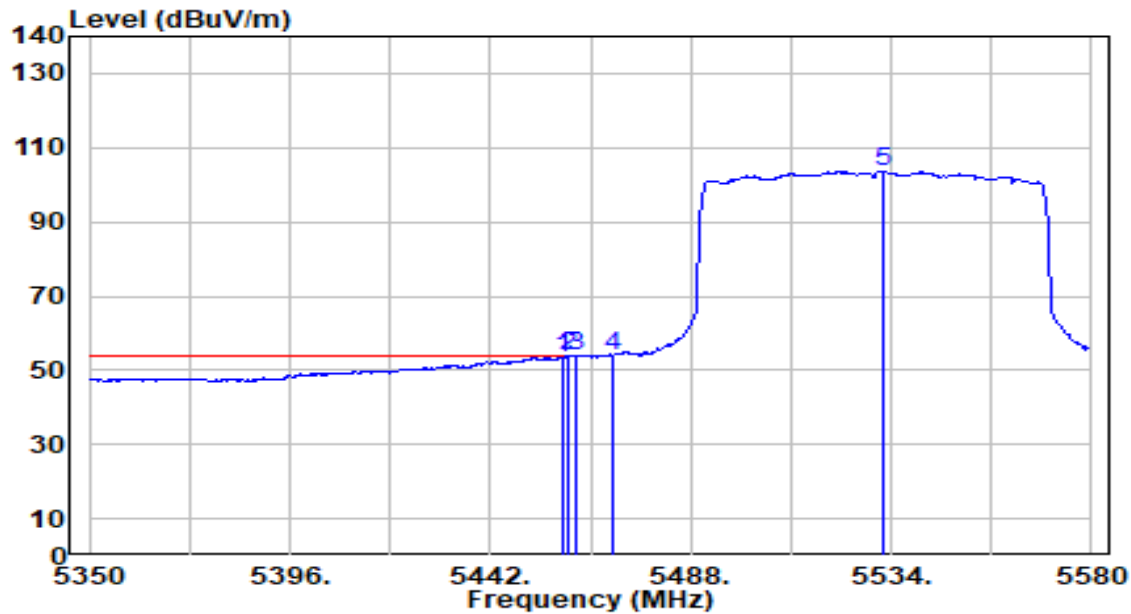


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.790	52.92	0.66	53.58	-0.42	54.00	161	184	Average
2	*	5460.000	53.08	0.66	53.74	-0.26	54.00	161	184	Average
3		5461.550	53.21	0.67	53.88	N/A	N/A	161	184	Average
4		5470.000	53.26	0.71	53.96	N/A	N/A	161	184	Average
5		5531.930	102.61	0.99	103.60	N/A	N/A	161	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

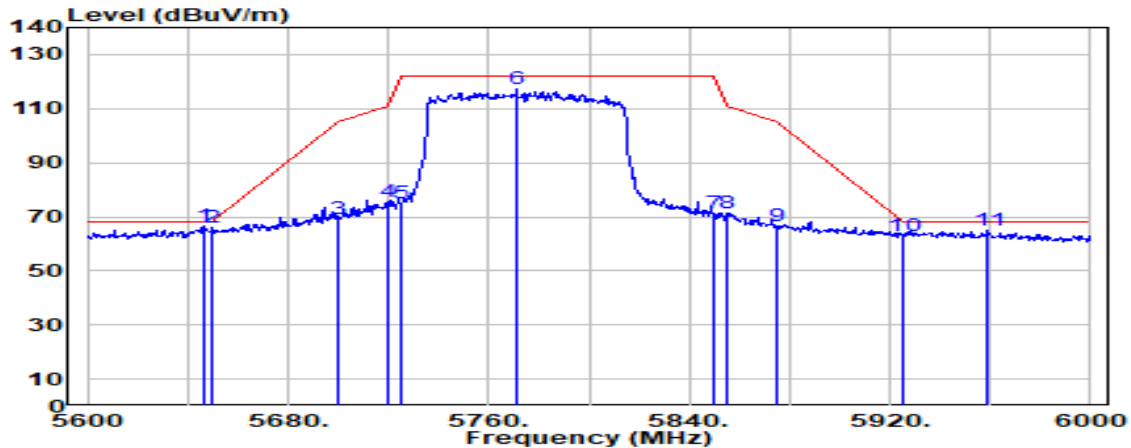


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.400	65.07	1.53	66.59	-1.61	68.20	200	182	Peak
2		5650.000	64.72	1.54	66.27	-1.93	68.20	200	182	Peak
3		5700.000	67.66	1.78	69.44	-35.76	105.20	200	182	Peak
4		5720.000	73.58	1.87	75.45	-35.35	110.80	200	182	Peak
5		5725.000	73.08	1.89	74.97	-47.23	122.20	200	182	Peak
6		5771.200	115.11	2.11	117.22	N/A	N/A	200	182	Peak
7		5850.000	68.93	2.25	71.18	-51.02	122.20	200	182	Peak
8		5855.000	69.01	2.25	71.27	-39.53	110.80	200	182	Peak
9		5875.000	64.19	2.26	66.45	-38.75	105.20	200	182	Peak
10		5925.000	60.71	2.27	62.98	-5.22	68.20	200	182	Peak
11		5959.200	62.70	2.27	64.97	-3.23	68.20	200	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

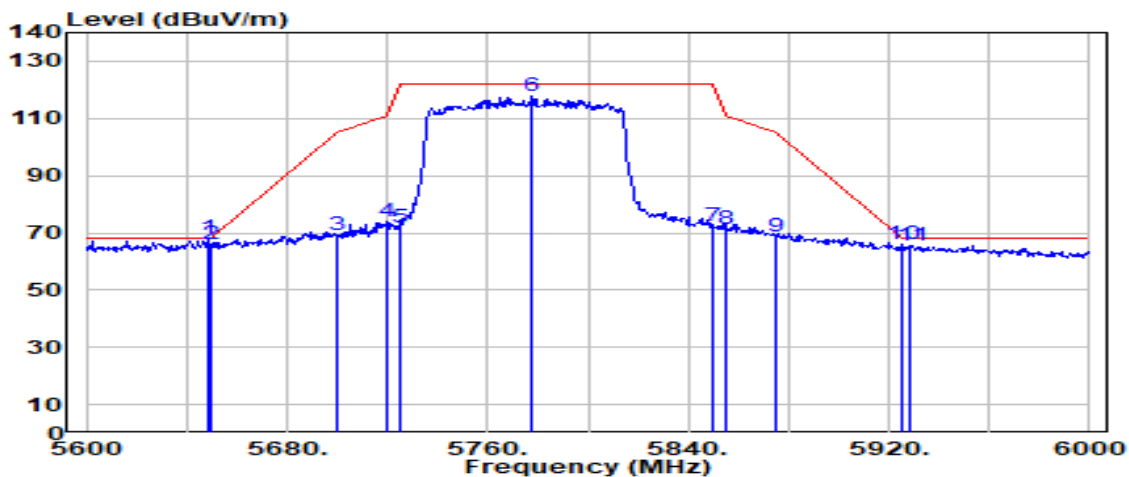


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	66.41	1.53	67.94	-0.26	68.20	200	178	Peak
2		5650.000	64.49	1.54	66.03	-2.17	68.20	200	178	Peak
3		5700.000	67.37	1.78	69.14	-36.06	105.20	200	178	Peak
4		5720.000	72.07	1.87	73.94	-36.86	110.80	200	178	Peak
5		5725.000	69.85	1.89	71.74	-50.46	122.20	200	178	Peak
6		5777.600	115.45	2.14	117.59	N/A	N/A	200	178	Peak
7		5850.000	70.28	2.25	72.54	-49.66	122.20	200	178	Peak
8		5855.000	69.13	2.25	71.38	-39.42	110.80	200	178	Peak
9		5875.000	66.61	2.26	68.87	-36.33	105.20	200	178	Peak
10		5925.000	63.80	2.27	66.07	-2.13	68.20	200	178	Peak
11		5928.800	63.42	2.27	65.69	-2.51	68.20	200	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

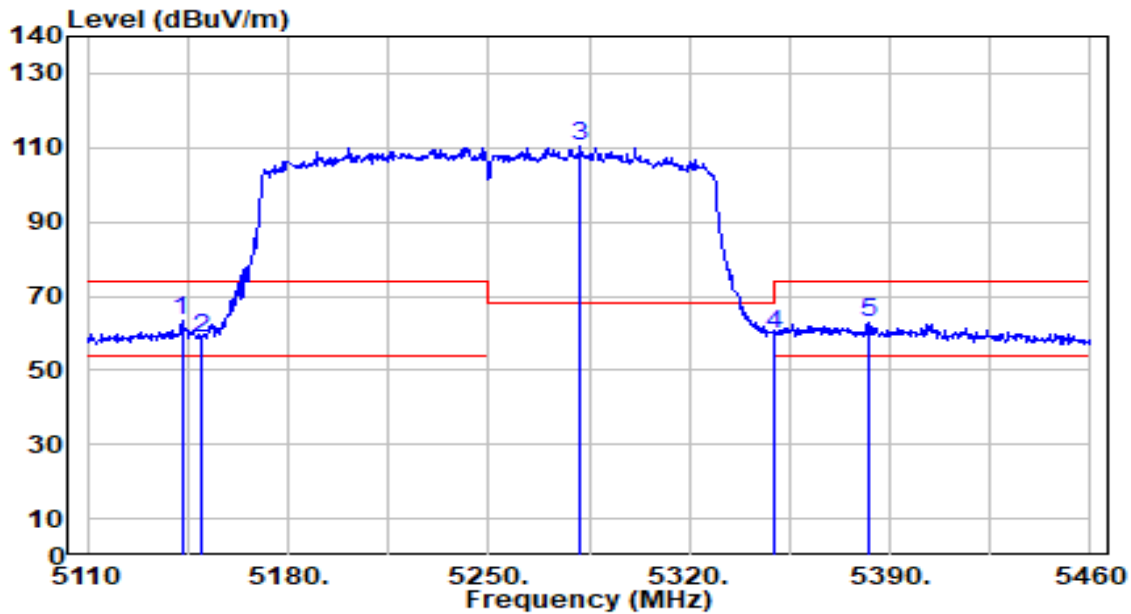


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.900	62.77	0.65	63.41	-10.59	74.00	167	178	Peak
2		5150.000	58.11	0.65	58.76	-15.24	74.00	167	178	Peak
3		5282.200	110.01	0.58	110.59	N/A	N/A	167	178	Peak
4		5350.000	59.40	0.47	59.87	-14.13	74.00	167	178	Peak
5		5382.300	62.49	0.42	62.92	-11.08	74.00	167	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

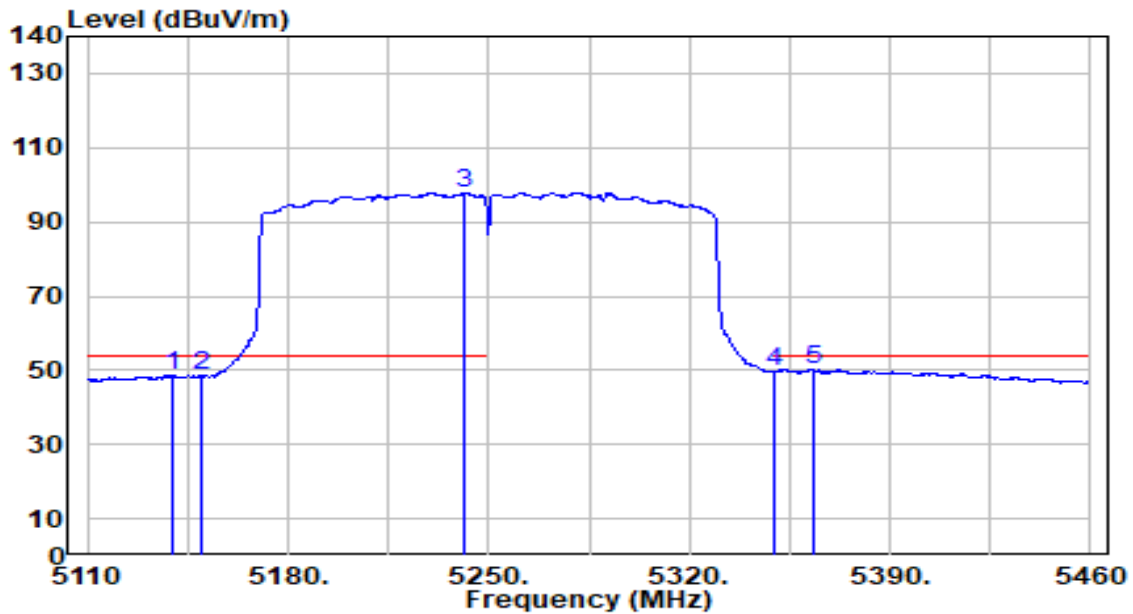


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5140.100	47.85	0.64	48.50	-5.50	54.00	167	178	Average
2	5150.000	47.72	0.65	48.37	-5.63	54.00	167	178	Average
3	5241.250	97.15	0.64	97.79	N/A	N/A	167	178	Average
4	5350.000	49.11	0.47	49.58	-4.42	54.00	167	178	Average
5	* 5363.050	49.86	0.45	50.31	-3.69	54.00	167	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

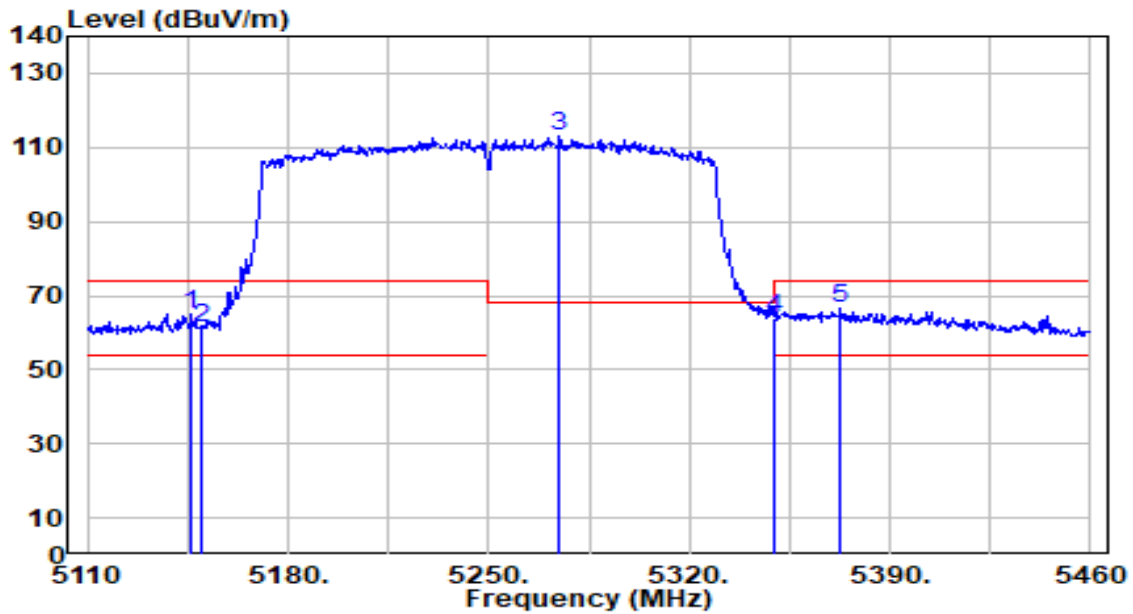


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.400	64.37	0.65	65.02	-8.98	74.00	158	180	Peak
2	5150.000	60.51	0.65	61.16	-12.84	74.00	158	180	Peak
3	5274.850	112.65	0.59	113.24	N/A	N/A	158	180	Peak
4	5350.000	63.71	0.47	64.18	-9.82	74.00	158	180	Peak
5	* 5372.850	66.21	0.44	66.64	-7.36	74.00	158	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Poing	Date of Test	2024-12-17
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

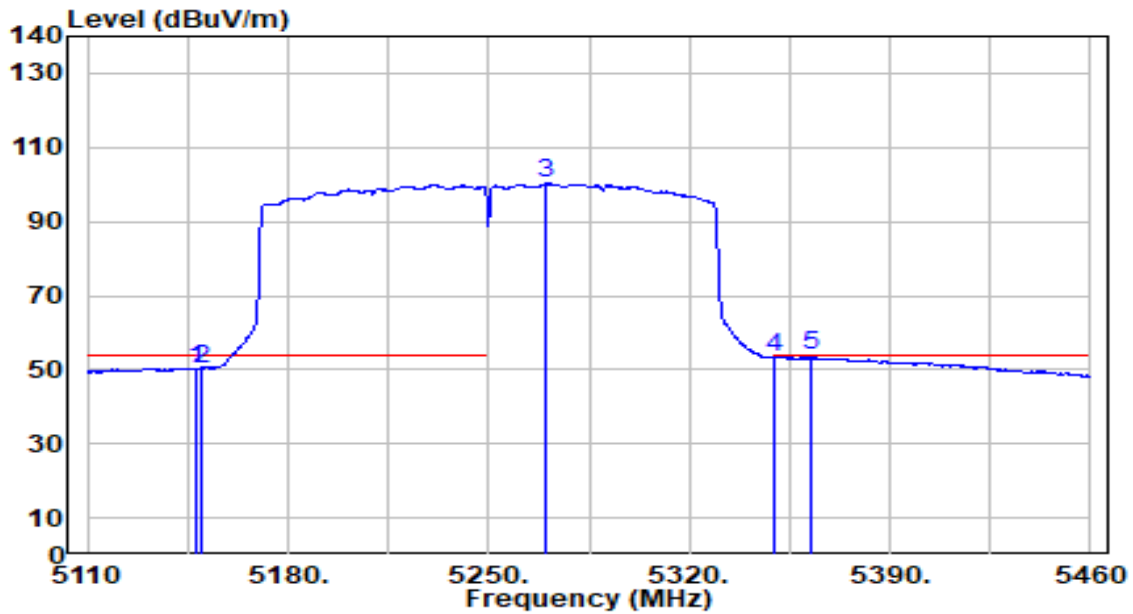


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.800	49.77	0.65	50.42	-3.58	54.00	158	180	Average
2	5150.000	49.66	0.65	50.32	-3.68	54.00	158	180	Average
3	5270.300	99.63	0.59	100.22	N/A	N/A	158	180	Average
4	5350.000	52.72	0.47	53.19	-0.81	54.00	158	180	Average
5	* 5362.350	53.33	0.45	53.79	-0.21	54.00	158	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

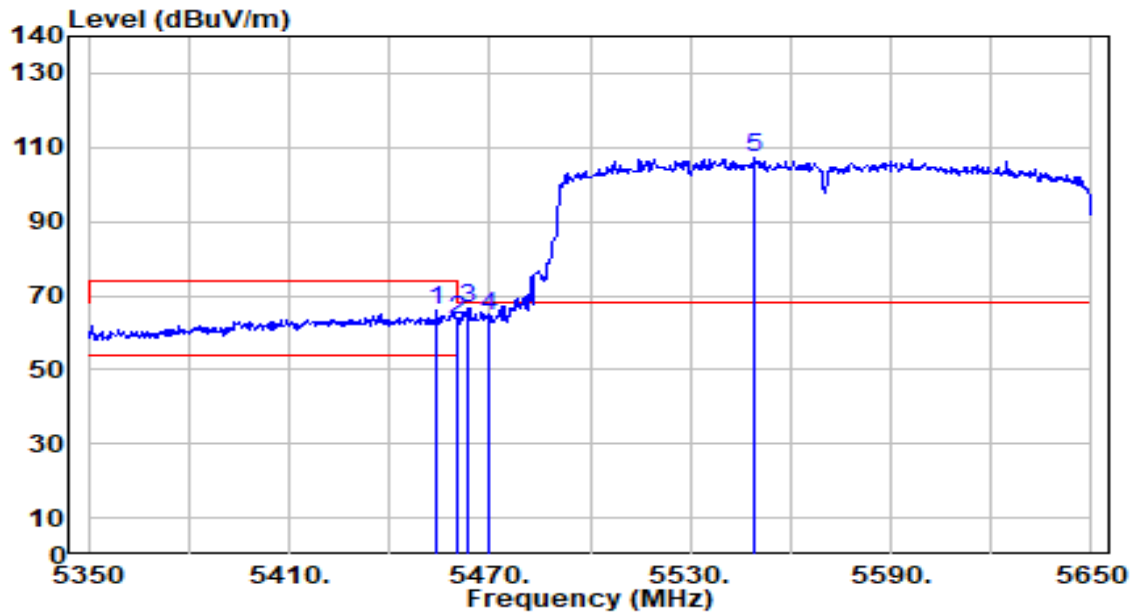


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.100	65.37	0.64	66.01	-7.99	74.00	198	186	Peak
2	5460.000	62.65	0.66	63.31	-10.69	74.00	198	186	Peak
3	* 5463.100	65.90	0.68	66.57	-1.63	68.20	198	186	Peak
4	5470.000	63.57	0.71	64.28	-3.92	68.20	198	186	Peak
5	5549.500	106.34	1.07	107.41	N/A	N/A	198	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

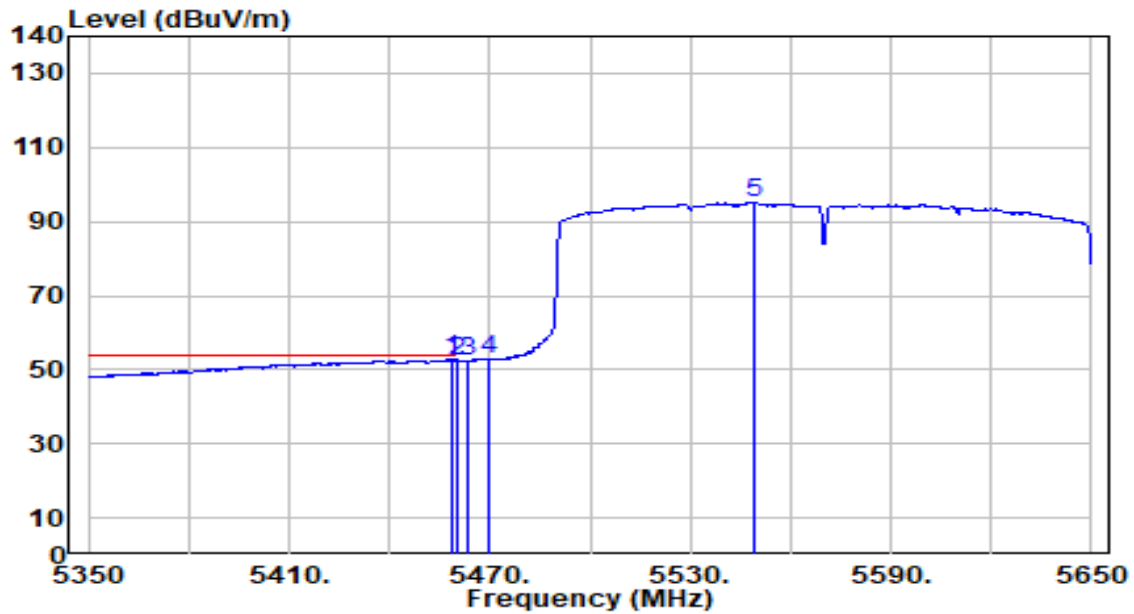


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.900	52.16	0.66	52.82	-1.18	54.00	198	186	Average
2		5460.000	51.86	0.66	52.52	-1.48	54.00	198	186	Average
3		5463.100	51.71	0.68	52.39	N/A	N/A	198	186	Average
4		5470.000	52.09	0.71	52.80	N/A	N/A	198	186	Average
5		5549.200	93.98	1.07	95.05	N/A	N/A	198	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

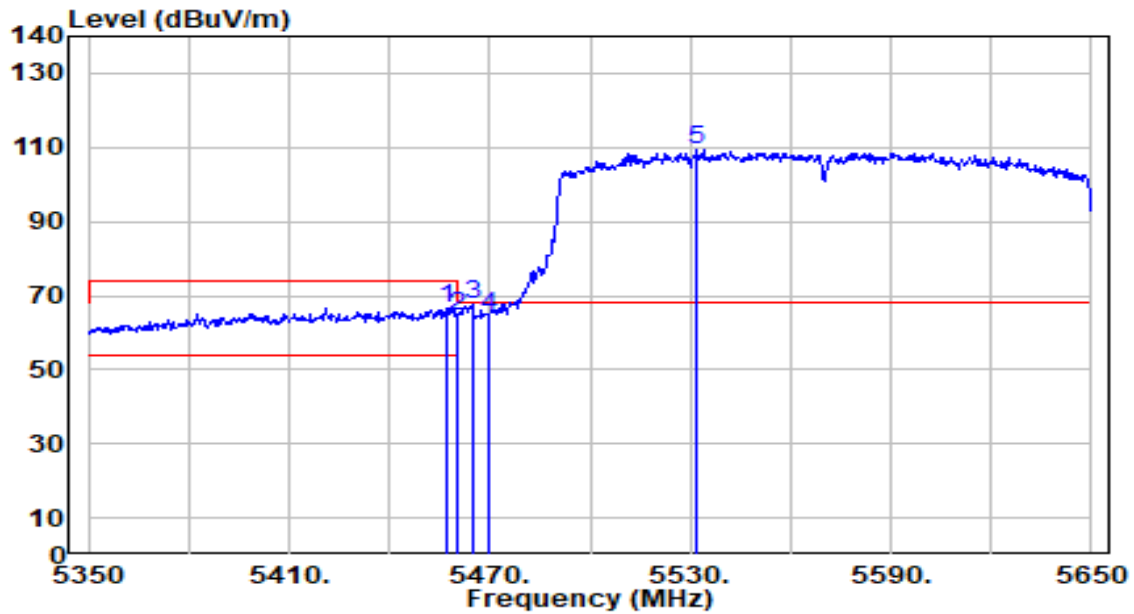


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.100	66.10	0.65	66.75	-7.25	74.00	161	184	Peak
2	5460.000	63.77	0.66	64.43	-9.57	74.00	161	184	Peak
3	* 5464.900	66.97	0.68	67.66	-0.54	68.20	161	184	Peak
4	5470.000	63.93	0.71	64.64	-3.56	68.20	161	184	Peak
5	5532.100	108.27	0.99	109.26	N/A	N/A	161	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

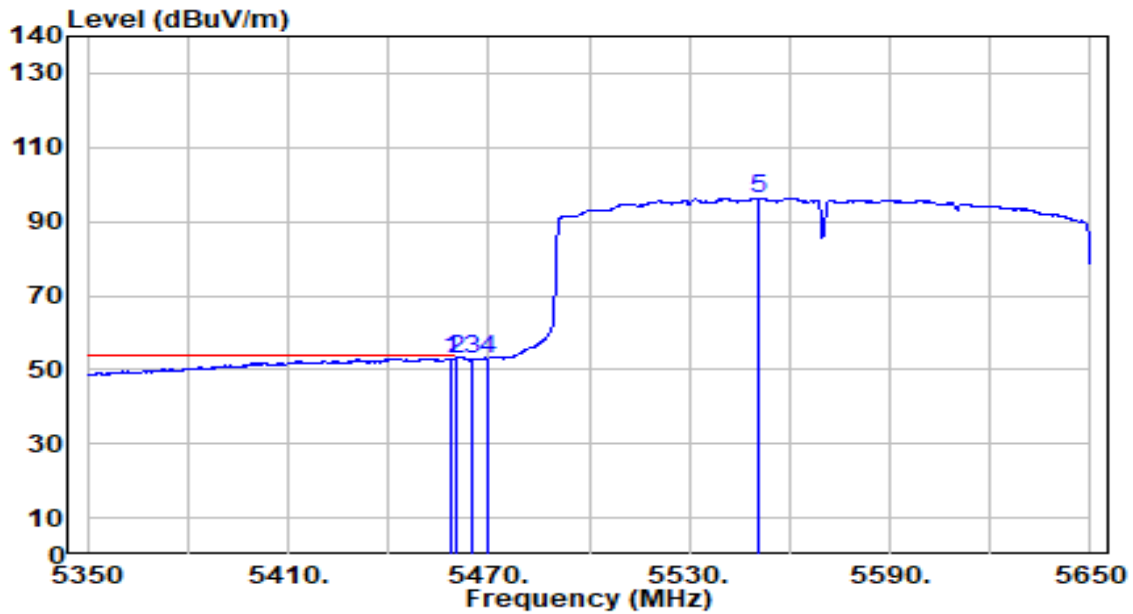

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.900	52.38	0.66	53.03	-0.97	54.00	161	184	Average
2		5460.000	52.22	0.66	52.88	-1.12	54.00	161	184	Average
3		5464.900	51.92	0.68	52.60	N/A	N/A	161	184	Average
4		5470.000	52.32	0.71	53.02	N/A	N/A	161	184	Average
5		5550.400	95.17	1.08	96.25	N/A	N/A	161	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBμV)	AV (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

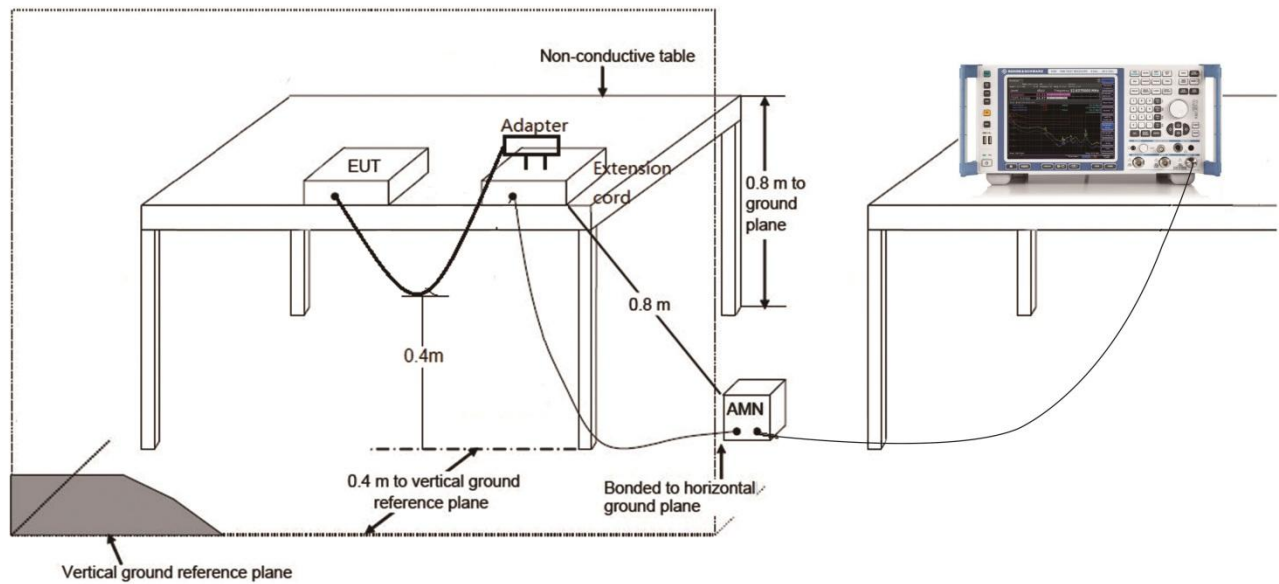

7.10.4.Test Result

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-16
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	19.4°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

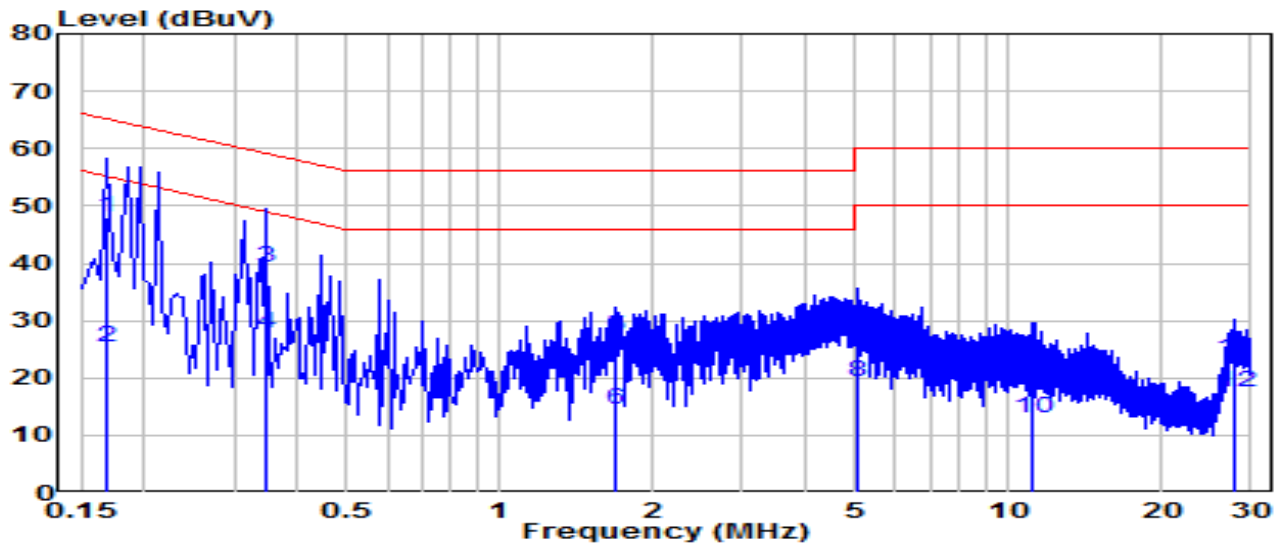


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.168	38.47	9.63	48.10	-16.96	65.06	QP
2	*	0.168	15.65	9.63	25.29	-29.77	55.06	Average
3		0.348	29.47	9.64	39.11	-19.90	59.01	QP
4		0.348	18.19	9.64	27.83	-21.18	49.01	Average
5		1.693	17.42	9.69	27.11	-28.89	56.00	QP
6		1.693	4.88	9.69	14.57	-31.43	46.00	Average
7		5.082	18.90	9.75	28.65	-31.35	60.00	QP
8		5.082	9.68	9.75	19.43	-30.57	50.00	Average
9		11.187	12.42	9.88	22.30	-37.70	60.00	QP
10		11.187	3.20	9.88	13.07	-36.93	50.00	Average
11		27.714	13.20	9.93	23.12	-36.88	60.00	QP
12		27.714	7.50	9.93	17.43	-32.57	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2024-12-16
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	19.4°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

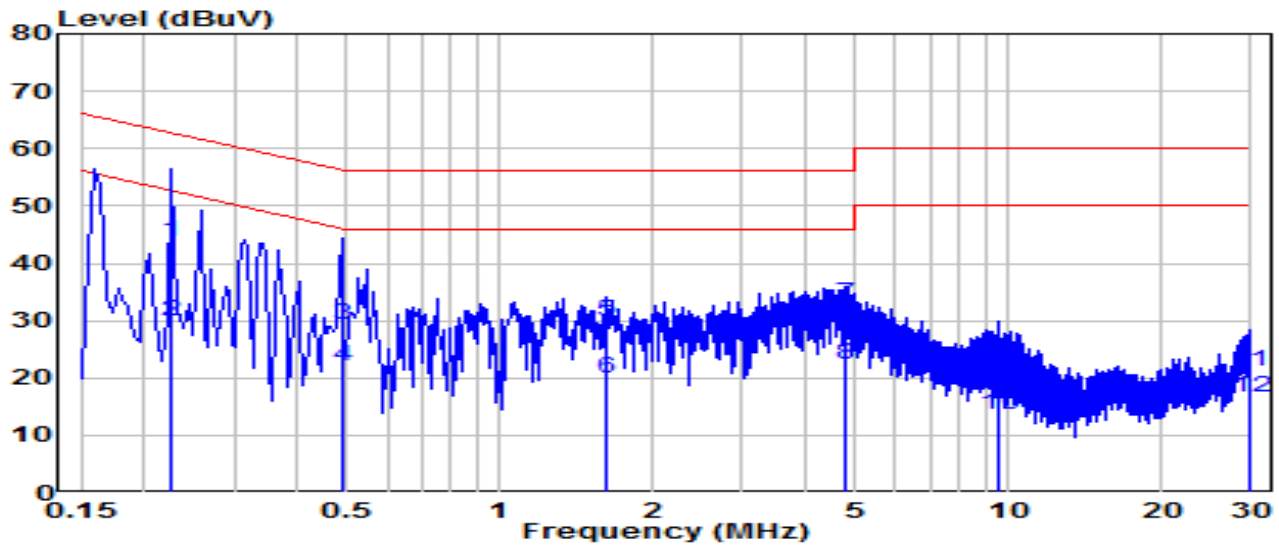

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.226	34.01	9.63	43.64	-18.93	62.58	QP
2	*	0.226	20.16	9.63	29.80	-22.78	52.58	Average
3		0.487	19.50	9.65	29.15	-27.06	56.21	QP
4		0.487	12.36	9.65	22.01	-24.20	46.21	Average
5		1.621	20.04	9.70	29.74	-26.26	56.00	QP
6		1.621	10.19	9.70	19.89	-26.11	46.00	Average
7		4.753	23.21	9.75	32.96	-23.04	56.00	QP
8		4.753	12.55	9.75	22.30	-23.70	46.00	Average
9		9.523	12.90	9.88	22.78	-37.22	60.00	QP
10		9.523	3.59	9.88	13.46	-36.54	50.00	Average
11		29.892	11.19	10.06	21.25	-38.75	60.00	QP
12		29.892	6.47	10.06	16.53	-33.47	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2412TW0103-UT” file.

Appendix B : EUT Photograph

Refer to “2412TW0103-UE” file.

Appendix C : Internal Photograph

Refer to “2412TW0103-UI” file.

_____ The End _____