




802.11 n20 CH01 (2412MHz)

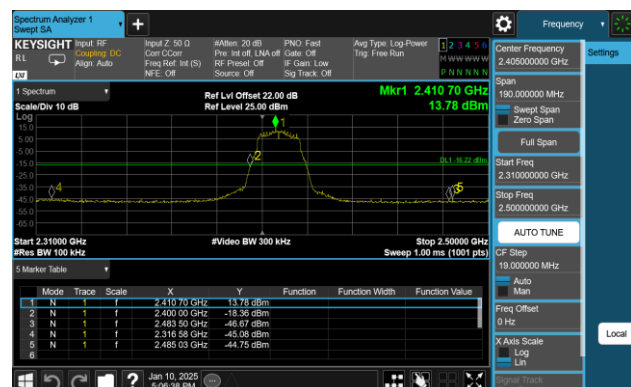


802.11 n20 CH01 (2412MHz)

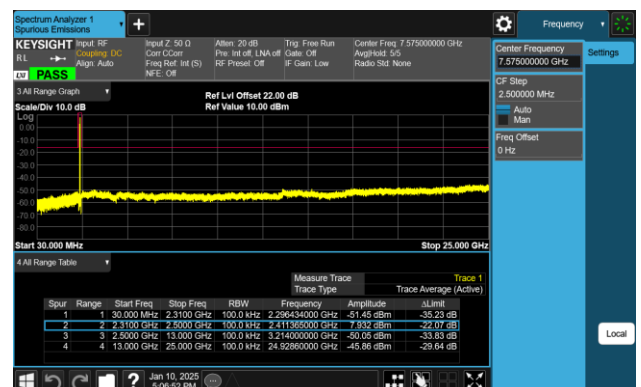


802.11 n20 CH06 (2437MHz)

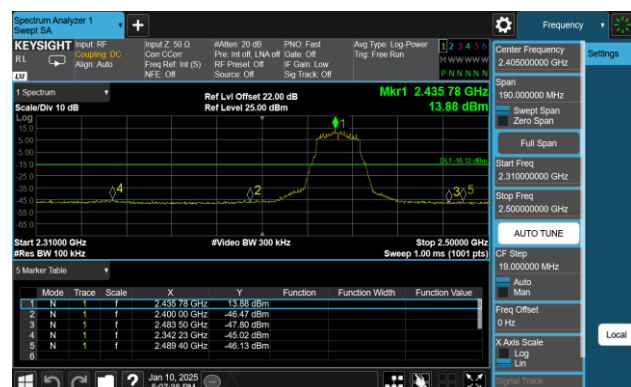


802.11 n20 CH06 (2437MHz)

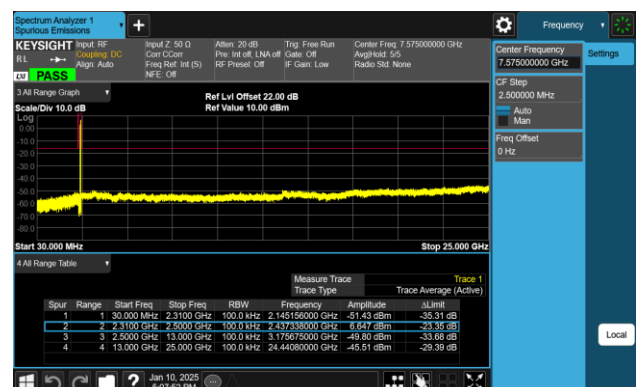

802.11 n20 CH11 (2462MHz)

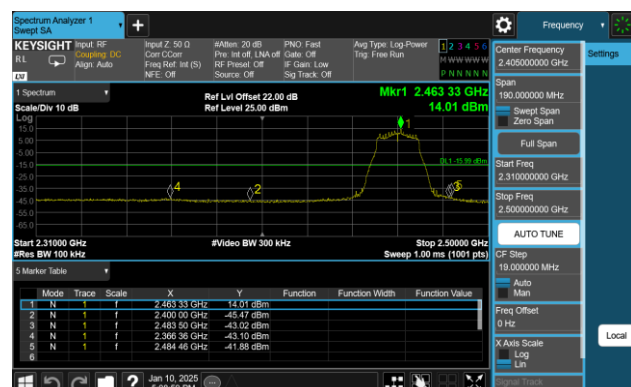


802.11 n20 CH11 (2462MHz)

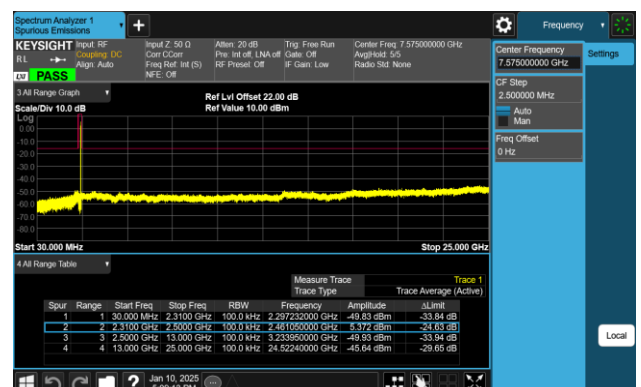

802.11 n40 CH03 (2422MHz)




802.11 n40 CH03 (2422MHz)

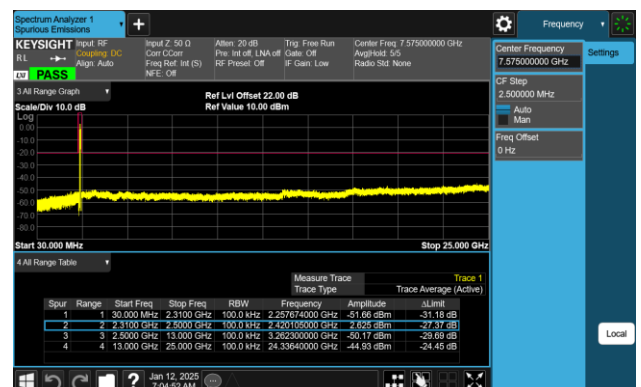


802.11 n40 CH06 (2437MHz)




802.11 n40 CH06 (2437MHz)

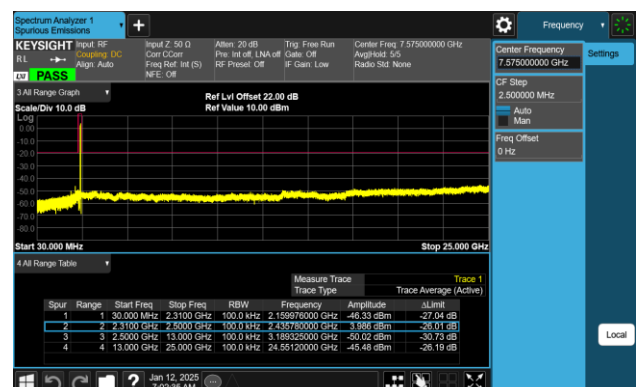


802.11 n40 CH09 (2452MHz)

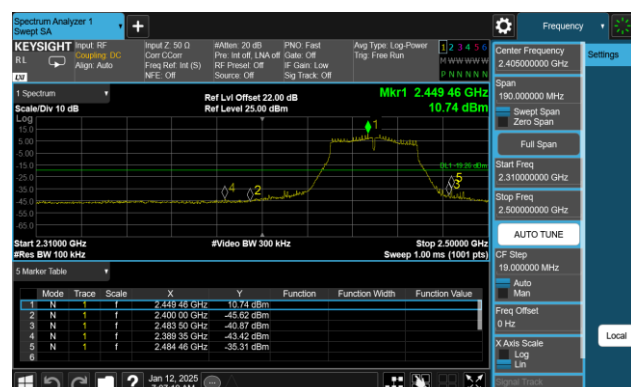


802.11 n40 CH09 (2452MHz)

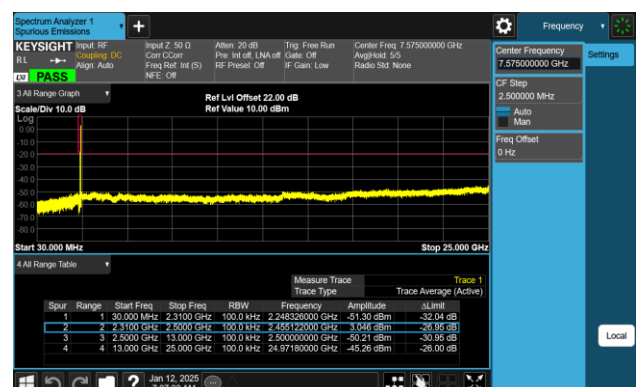


802.11 ax20 CH01 (2412MHz)

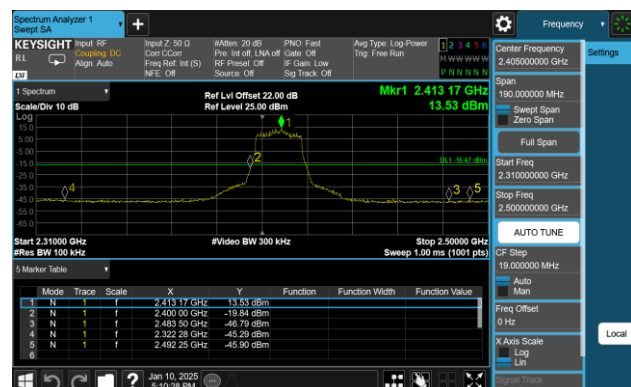


802.11 ax20 CH01 (2412MHz)

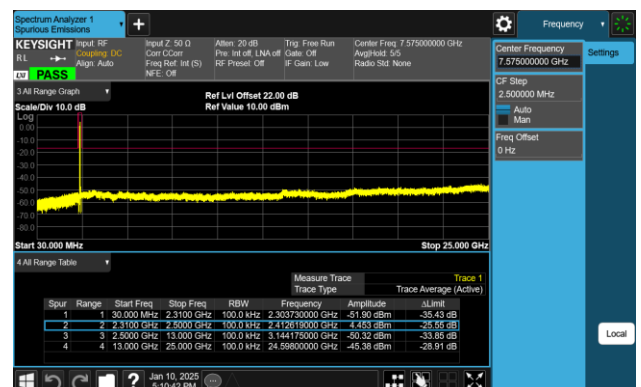


802.11 ax20 CH06 (2437MHz)

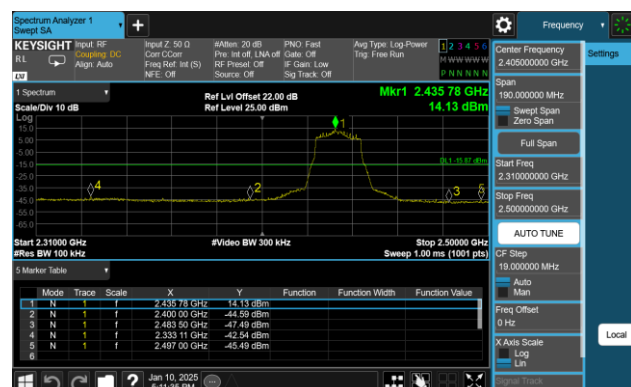


802.11 ax20 CH06 (2437MHz)

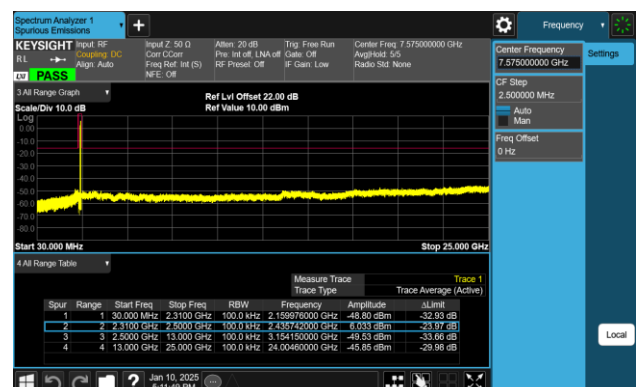


802.11 ax20 CH11 (2462MHz)

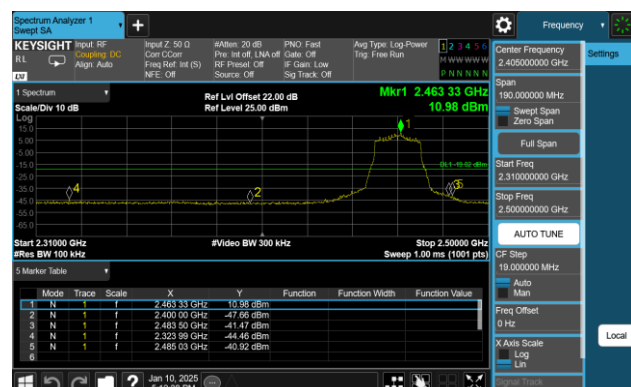


802.11 ax20 CH11 (2462MHz)

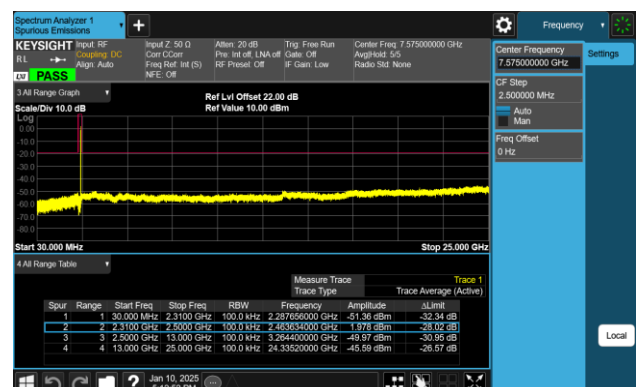


802.11 ax40 CH03 (2422MHz)

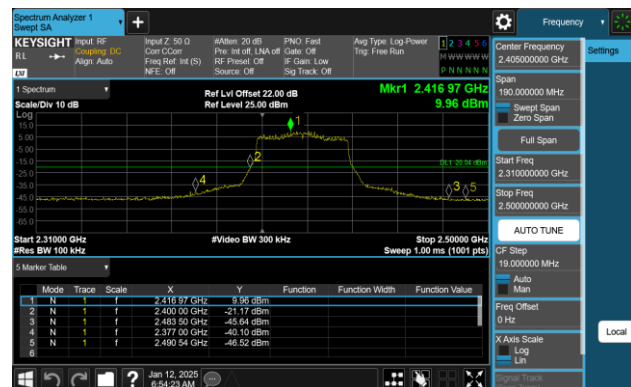


802.11 ax40 CH03 (2422MHz)

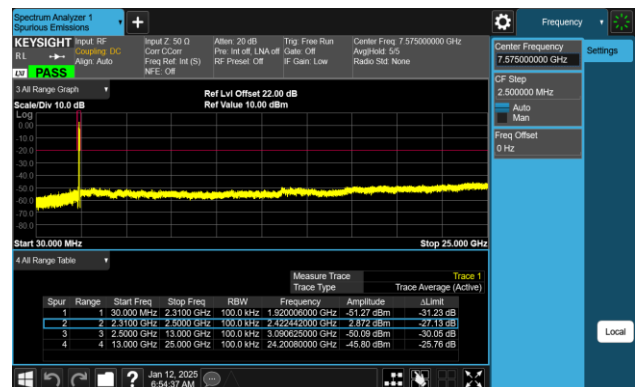


802.11 ax40 CH06 (2437MHz)

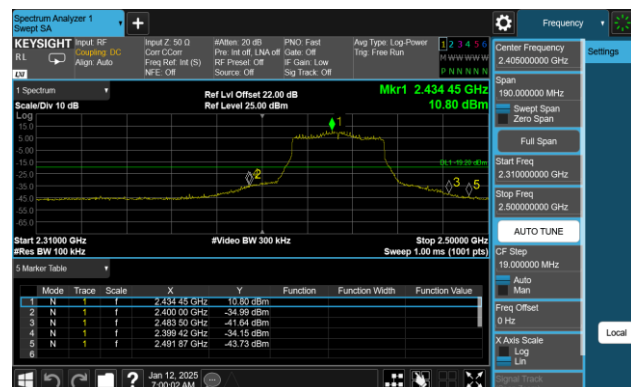


802.11 ax40 CH06 (2437MHz)

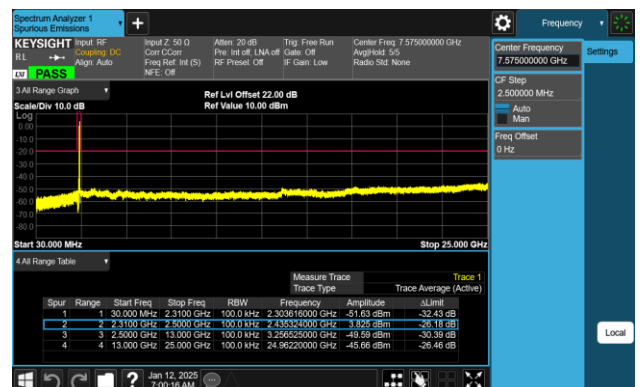


802.11 ax40 CH09 (2452MHz)

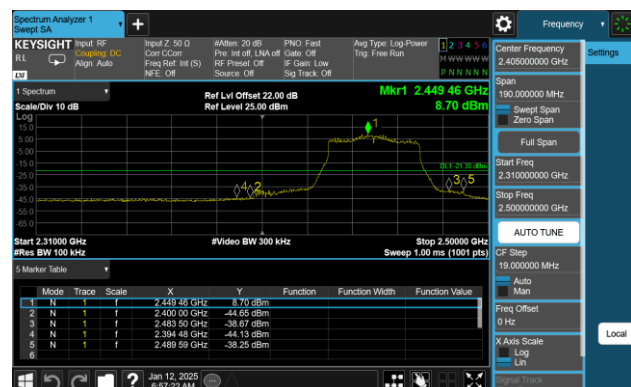


802.11 ax40 CH09 (2452MHz)

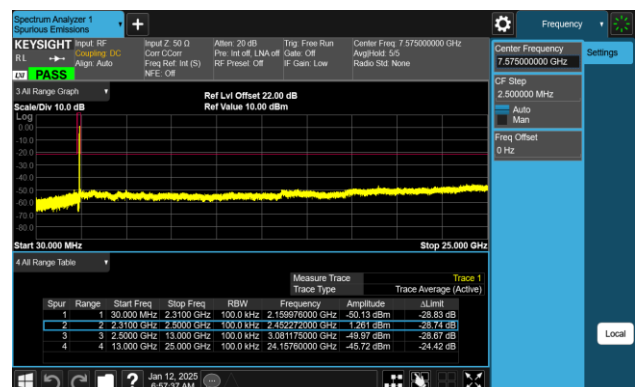


802.11 be20 CH01 (2412MHz)

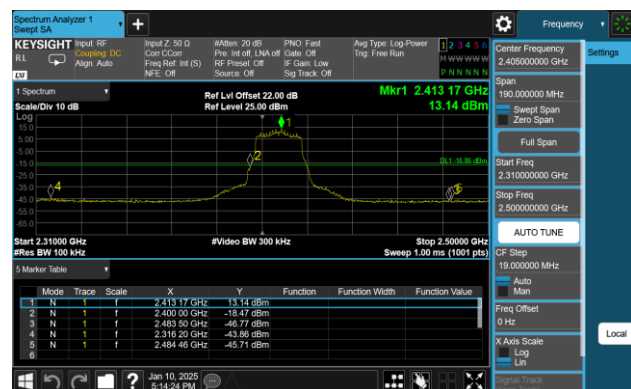


802.11 be20 CH01 (2412MHz)

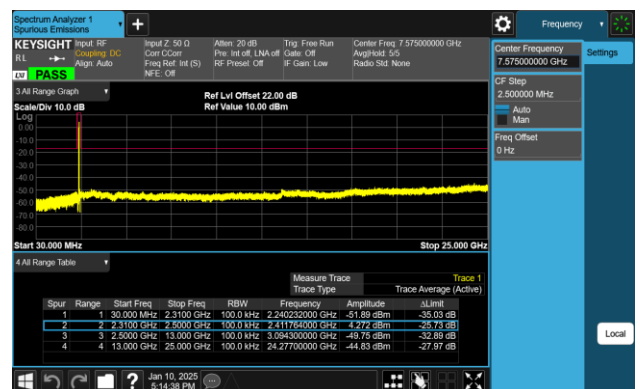


802.11 be20 CH06 (2437MHz)

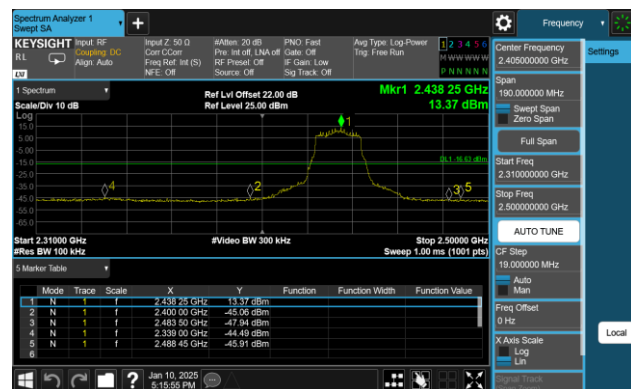


802.11 be20 CH06 (2437MHz)

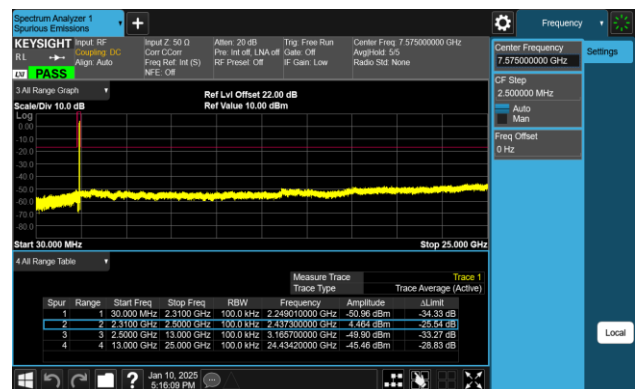


802.11 be20 CH11 (2462MHz)

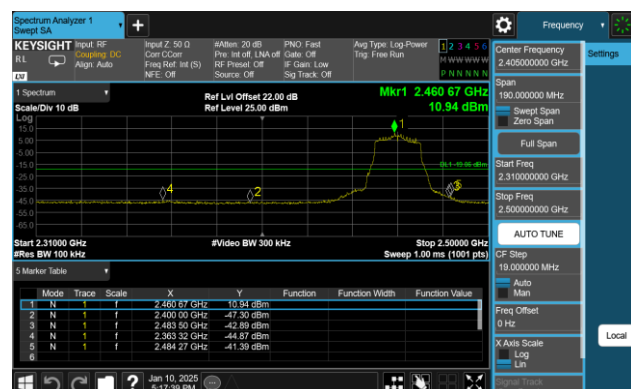


802.11 be20 CH11 (2462MHz)

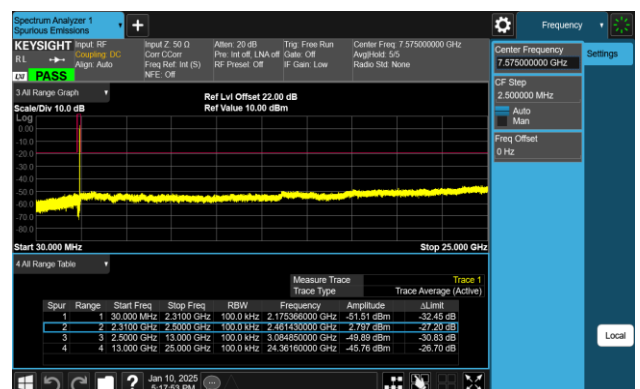


802.11 be40 CH03 (2422MHz)

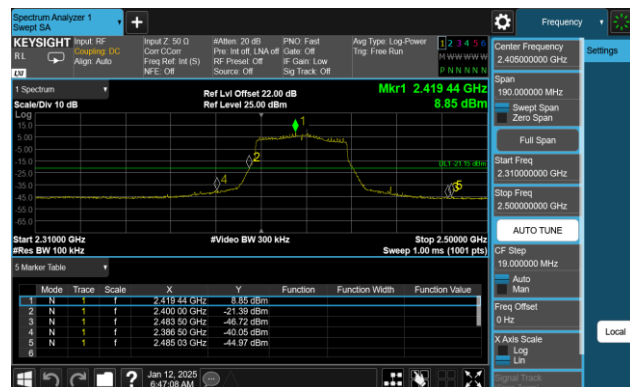


802.11 be40 CH03 (2422MHz)

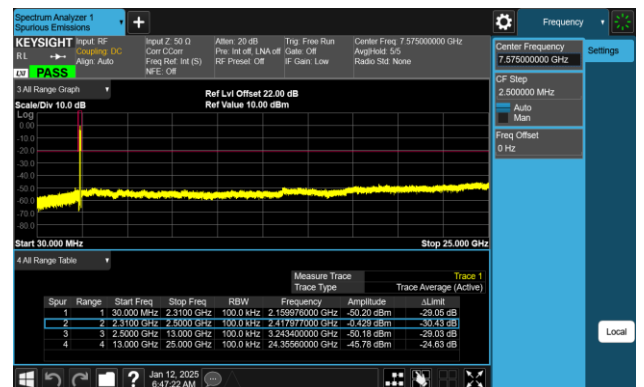


802.11 be40 CH06 (2437MHz)

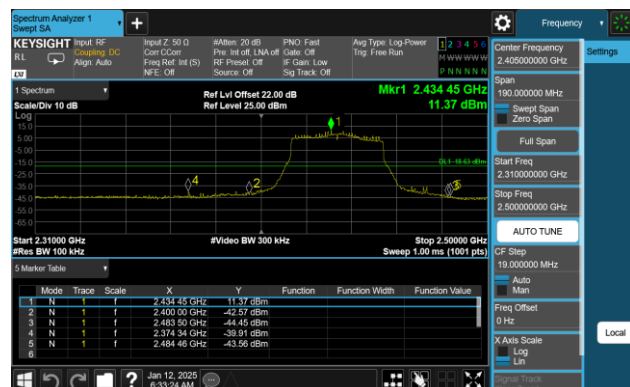


802.11 be40 CH06 (2437MHz)

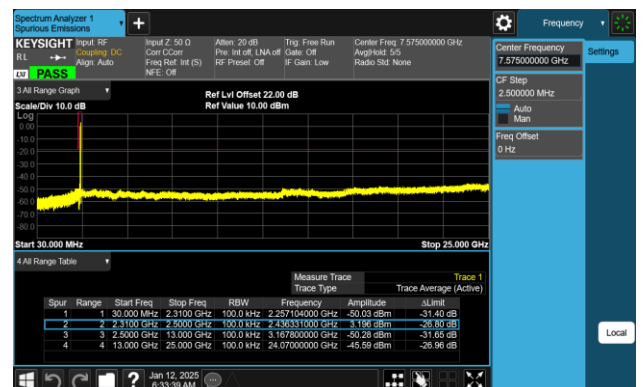

802.11 be40 CH09 (2452MHz)

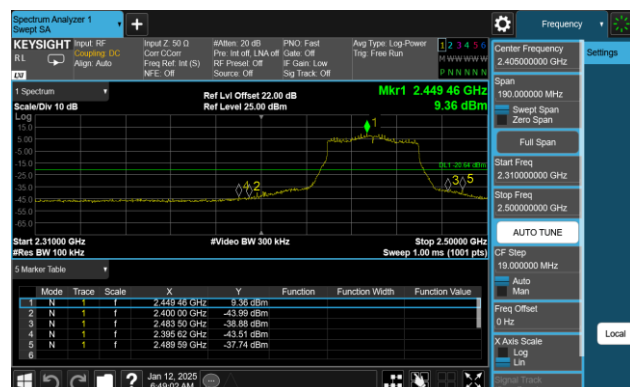

802.11 be40 CH09 (2452MHz)

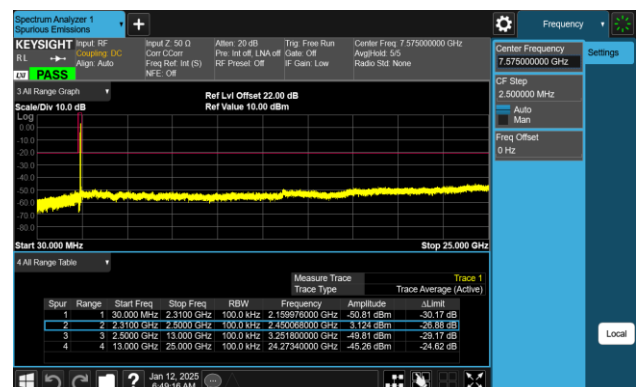

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

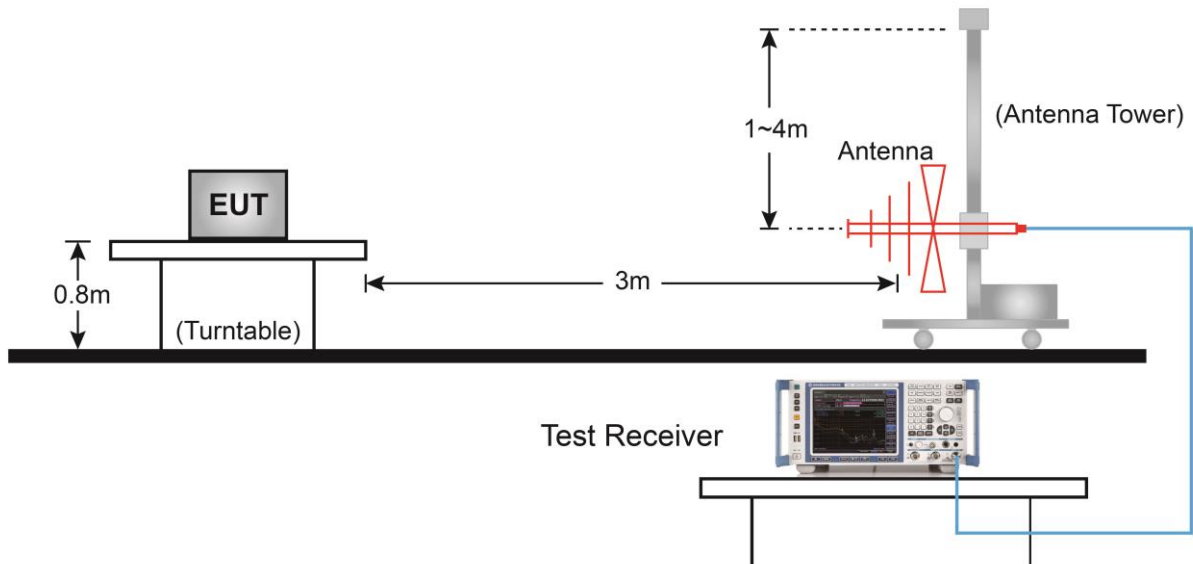


Above 1GHz Test Setup:

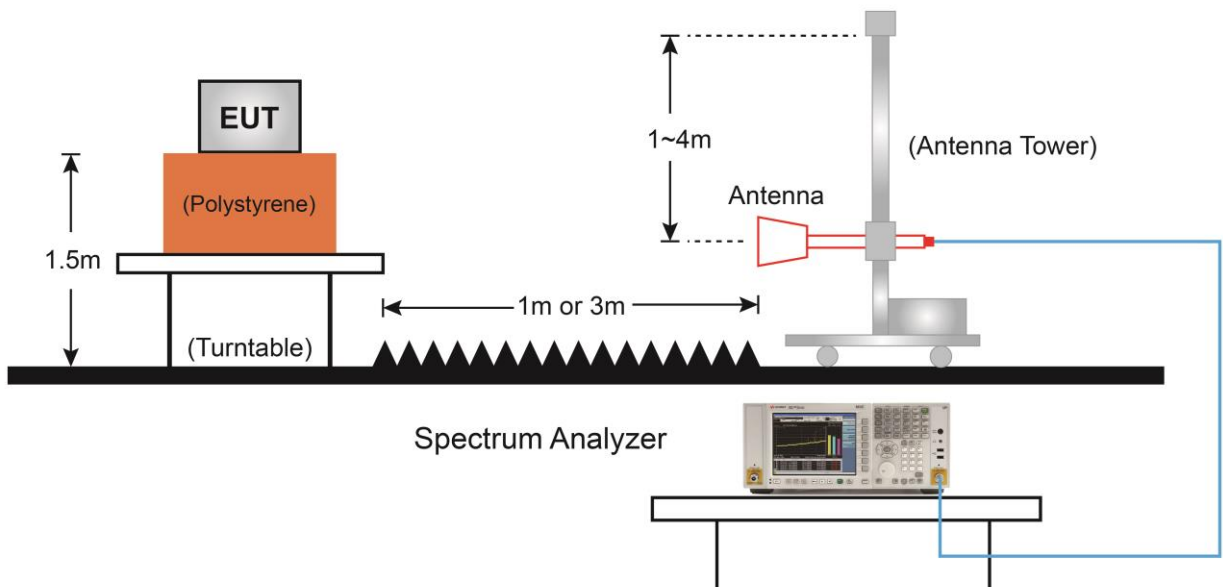

7.6.5. Test Result

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-09
Factor	VULB 9162	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

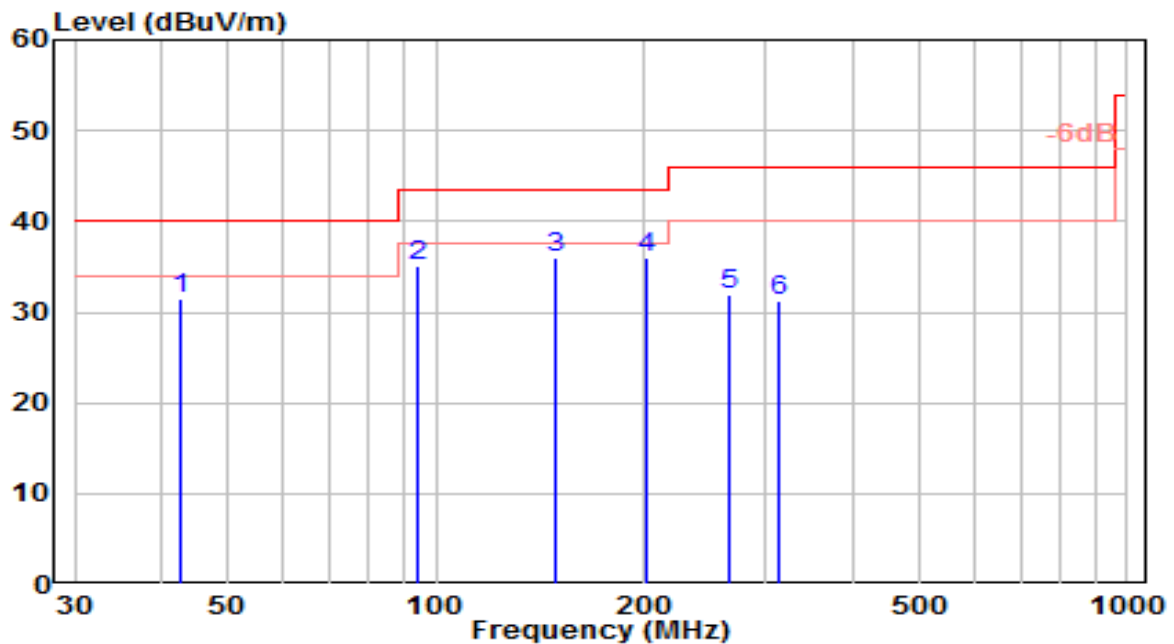


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	42.610	10.88	20.57	31.45	-8.55	40.00	100	255	QP
2	94.020	17.34	17.85	35.19	-8.31	43.50	150	15	QP
3	* 148.340	20.52	15.53	36.06	-7.44	43.50	150	285	QP
4	201.690	17.47	18.52	35.99	-7.51	43.50	150	285	QP
5	264.740	11.45	20.52	31.97	-14.03	46.00	100	295	QP
6	312.270	9.72	21.60	31.32	-14.68	46.00	100	240	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-09
Factor	VULB 9162	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

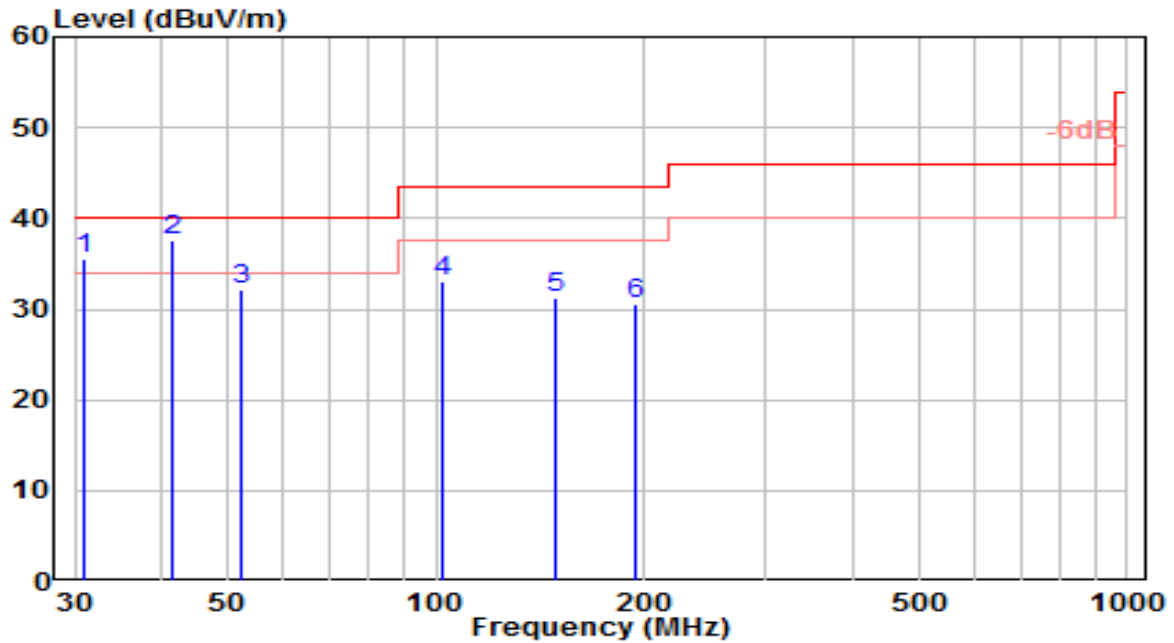


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		30.970	18.00	17.60	35.60	-4.40	40.00	100	245	QP
2	*	41.640	17.10	20.39	37.49	-2.51	40.00	100	175	QP
3		52.310	11.20	20.93	32.13	-7.87	40.00	100	20	QP
4		101.780	14.20	18.86	33.07	-10.43	43.50	100	340	QP
5		149.310	15.77	15.57	31.33	-12.17	43.50	100	325	QP
6		193.930	12.19	18.30	30.49	-13.01	43.50	100	320	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

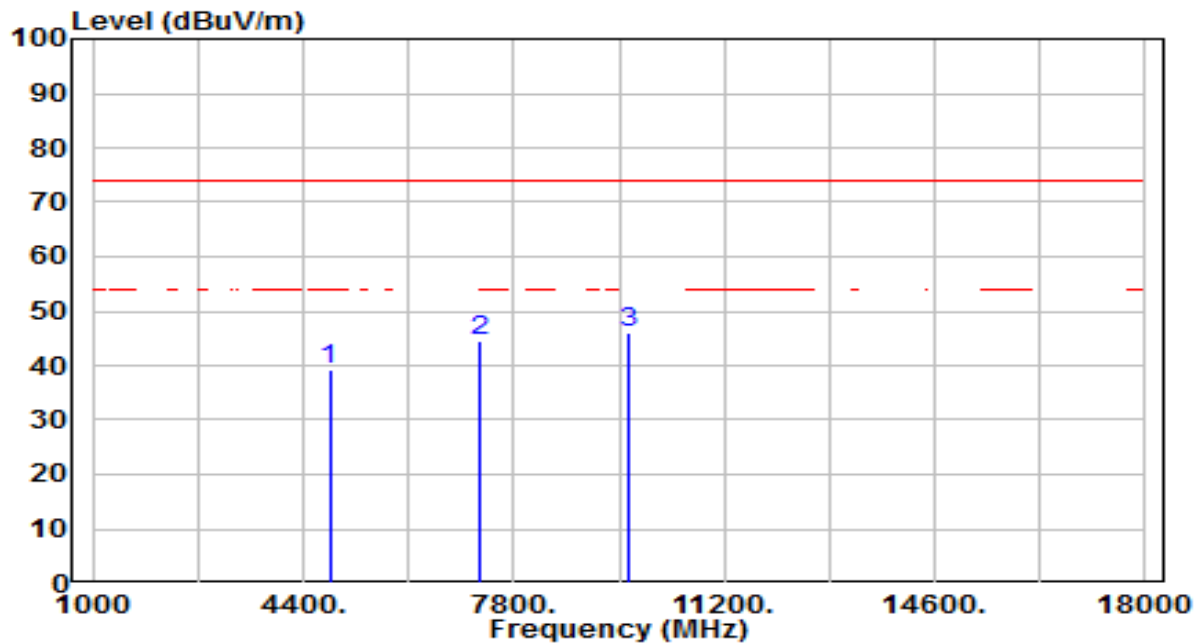


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.46	3.75	39.21	-34.79	74.00	200	209	Peak
2	7236.000	32.71	11.68	44.38	-29.62	74.00	200	195	Peak
3	* 9648.000	30.42	15.77	46.19	-27.81	74.00	200	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

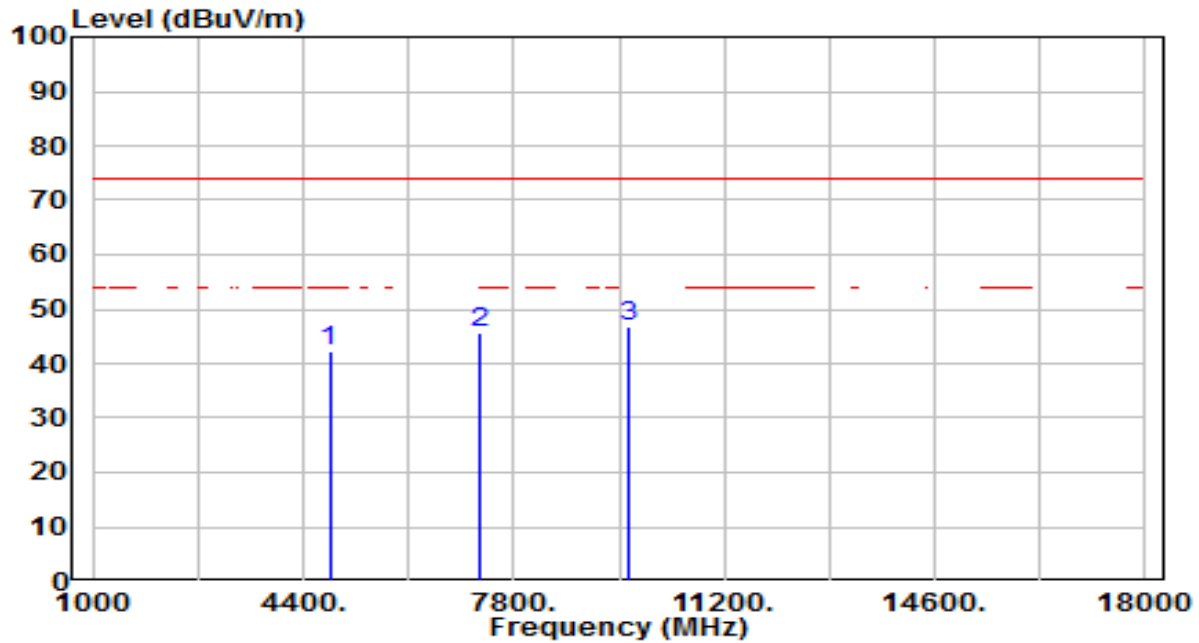


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	38.38	3.75	42.13	-31.87	74.00	200	165	Peak
2	7236.000	33.89	11.68	45.57	-28.43	74.00	200	219	Peak
3	* 9648.000	30.93	15.77	46.70	-27.30	74.00	200	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

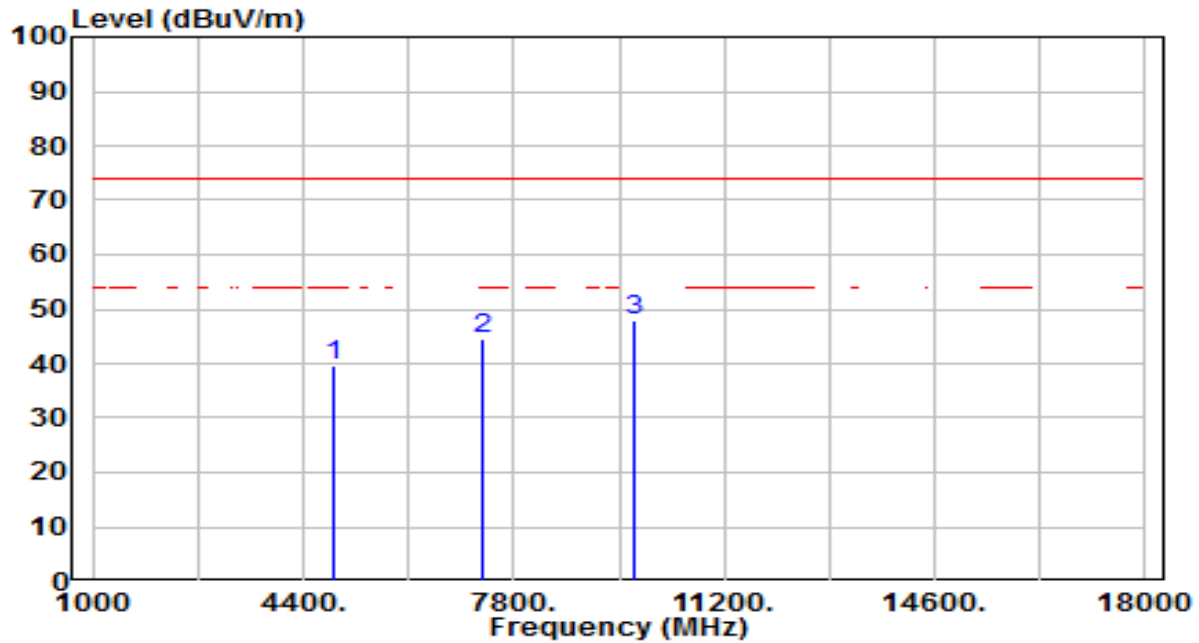


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.88	3.84	39.72	-34.28	74.00	200	216	Peak
2	7311.000	32.66	11.94	44.60	-29.40	74.00	200	216	Peak
3	* 9748.000	32.01	15.95	47.96	-26.04	74.00	200	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

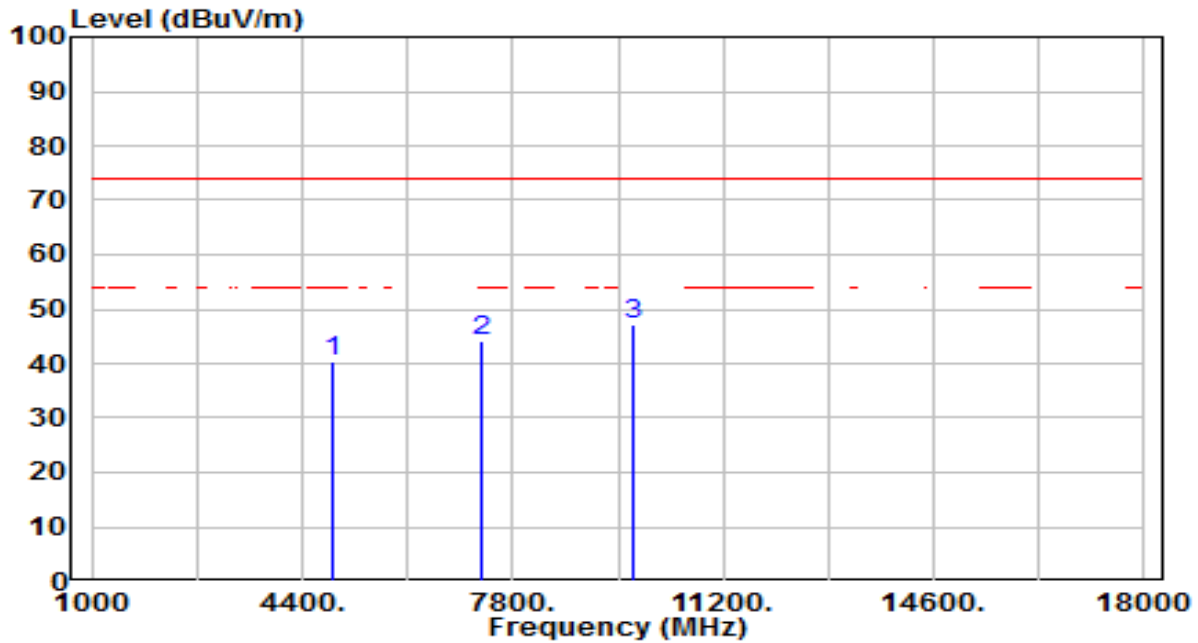


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.52	3.84	40.36	-33.64	74.00	200	170	Peak
2	7311.000	32.28	11.94	44.22	-29.78	74.00	200	101	Peak
3	* 9748.000	31.30	15.95	47.26	-26.74	74.00	200	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

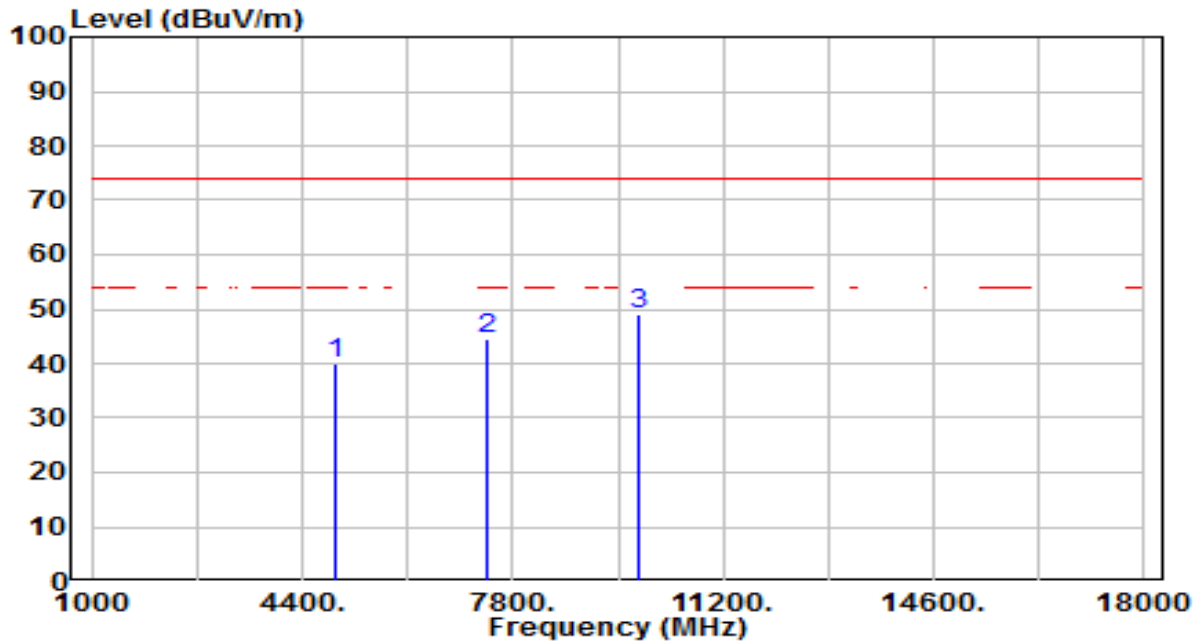


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	36.09	3.92	40.02	-33.98	74.00	200	224	Peak
2	7386.000	32.35	12.21	44.56	-29.44	74.00	200	221	Peak
3	* 9848.000	32.97	16.14	49.11	-24.89	74.00	200	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

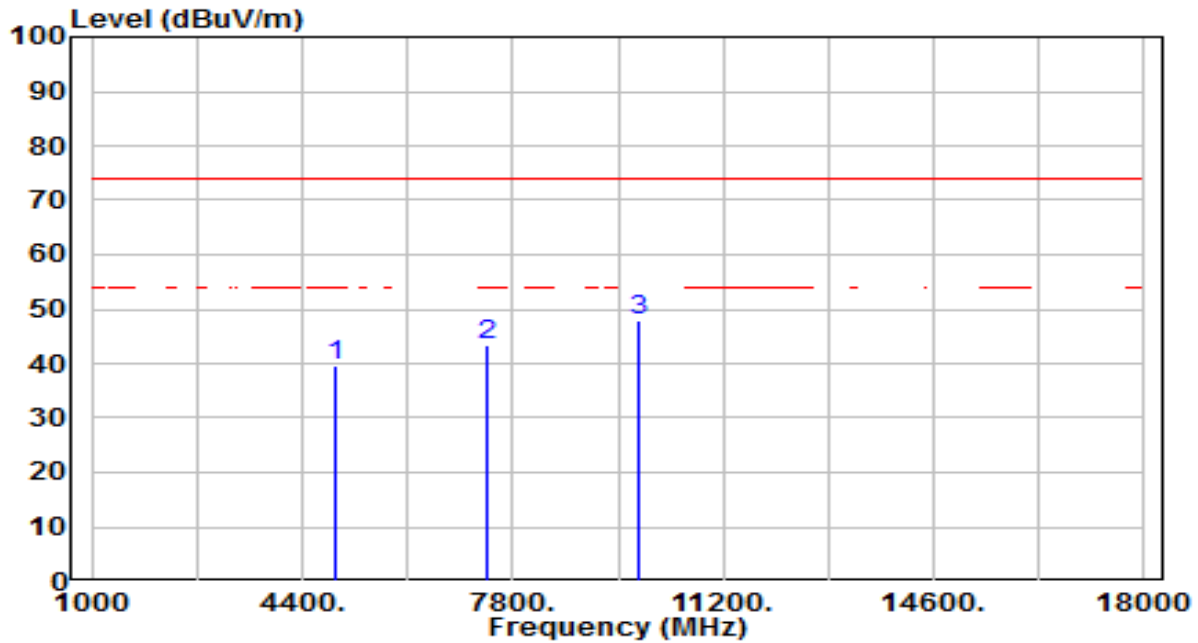


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.61	3.92	39.54	-34.46	74.00	200	163	Peak
2	7386.000	31.35	12.21	43.55	-30.45	74.00	200	53	Peak
3	* 9848.000	31.82	16.14	47.96	-26.04	74.00	200	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

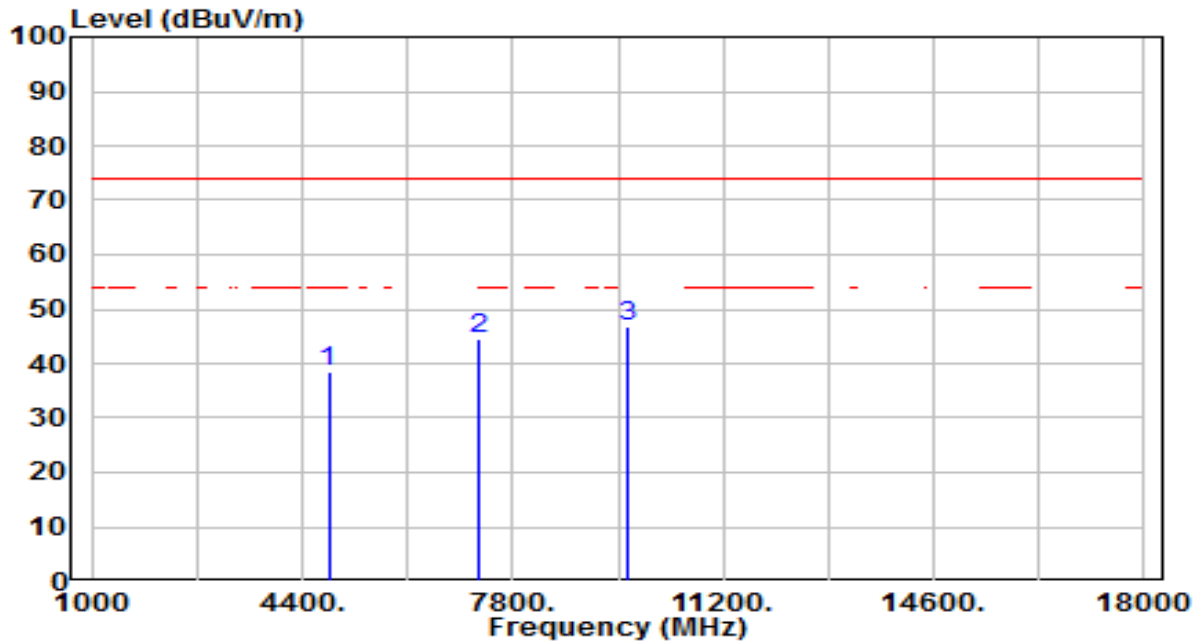


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.60	3.75	38.35	-35.65	74.00	200	30	Peak
2	7236.000	32.77	11.68	44.45	-29.55	74.00	200	140	Peak
3	* 9648.000	31.21	15.77	46.97	-27.03	74.00	200	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

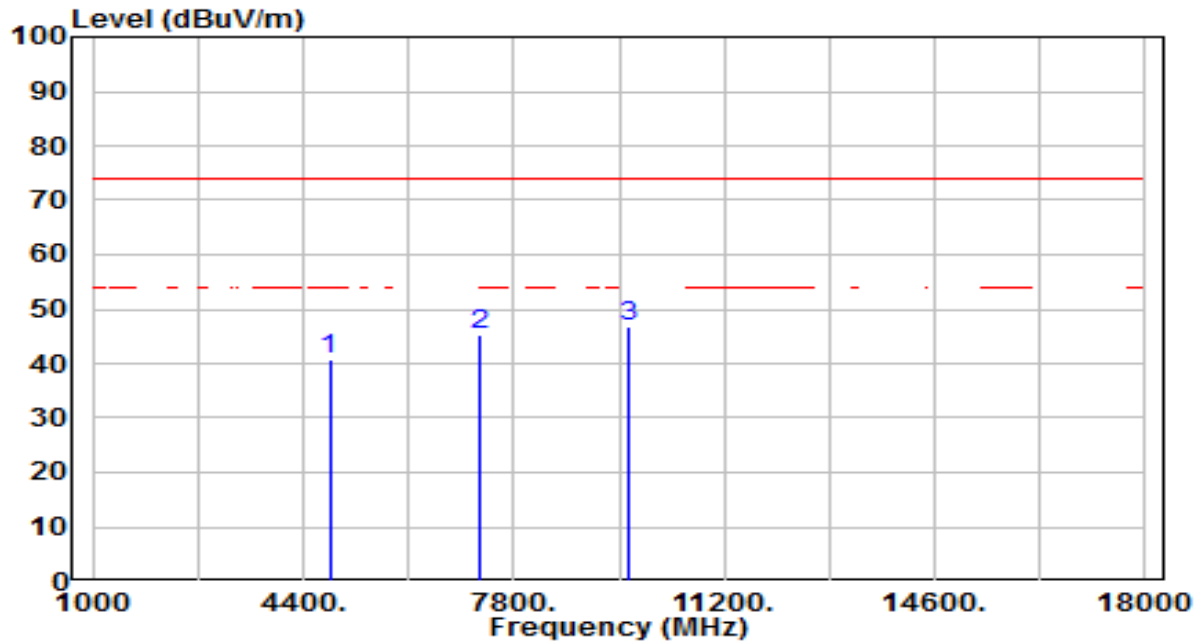


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.03	3.75	40.78	-33.22	74.00	200	166	Peak
2	7236.000	33.62	11.68	45.29	-28.71	74.00	200	187	Peak
3	* 9648.000	30.90	15.77	46.67	-27.33	74.00	200	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

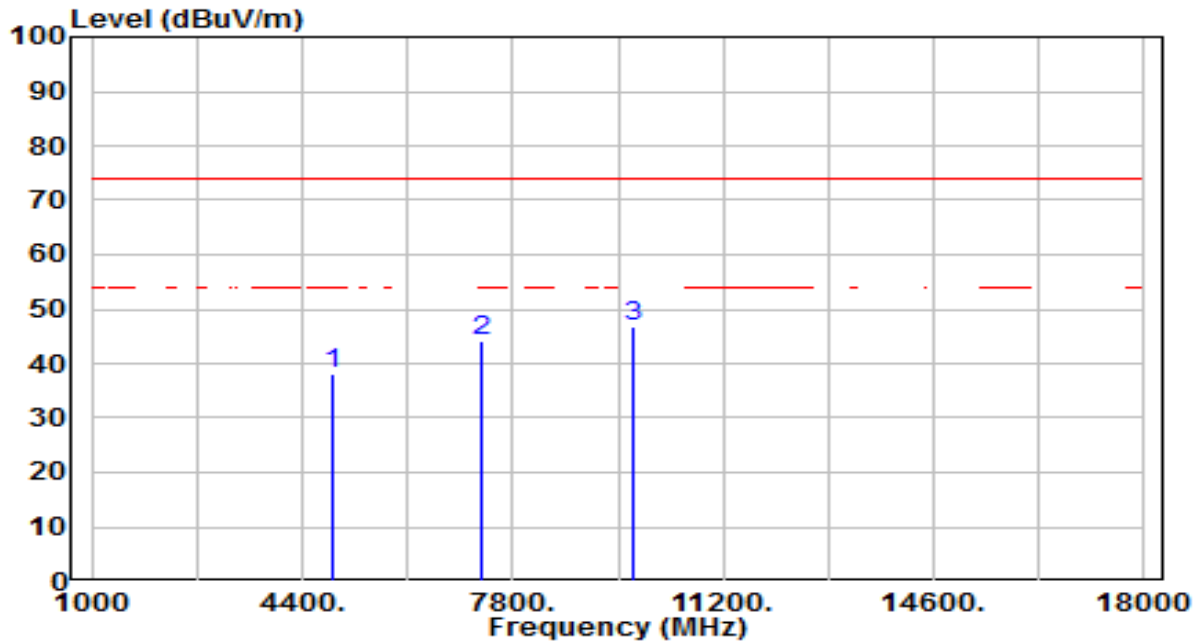


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.33	3.84	38.17	-35.83	74.00	200	244	Peak
2	7311.000	32.23	11.94	44.17	-29.83	74.00	200	155	Peak
3	* 9748.000	30.68	15.95	46.63	-27.37	74.00	200	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

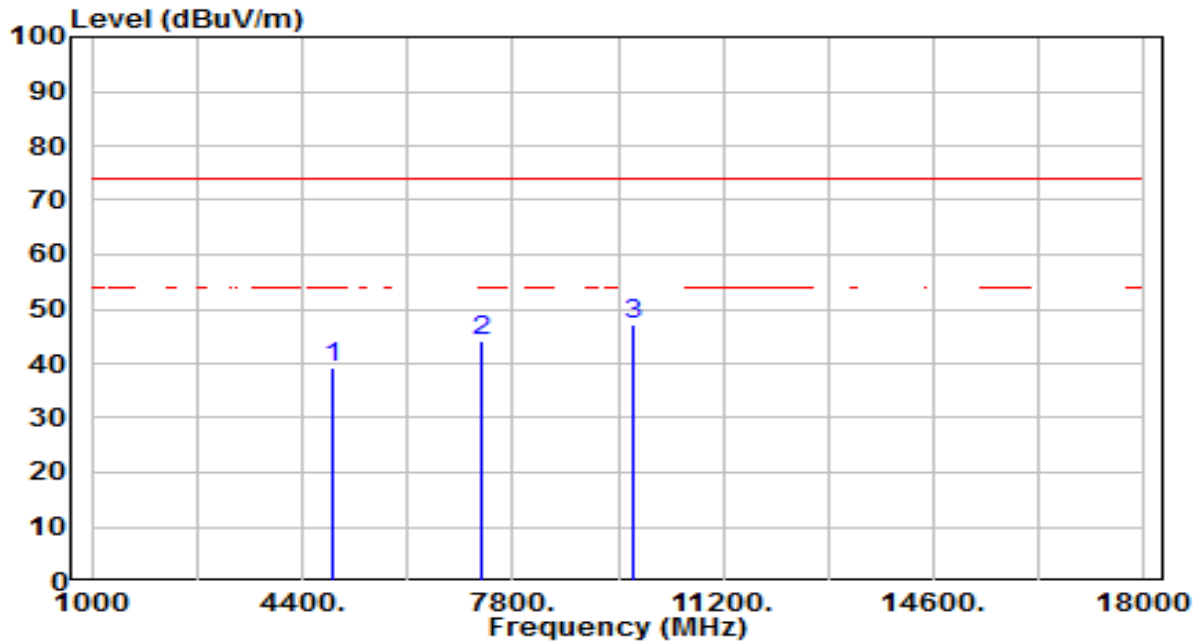


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.47	3.84	39.30	-34.70	74.00	200	159	Peak
2	7311.000	32.19	11.94	44.14	-29.86	74.00	200	14	Peak
3	* 9748.000	31.38	15.95	47.34	-26.66	74.00	200	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

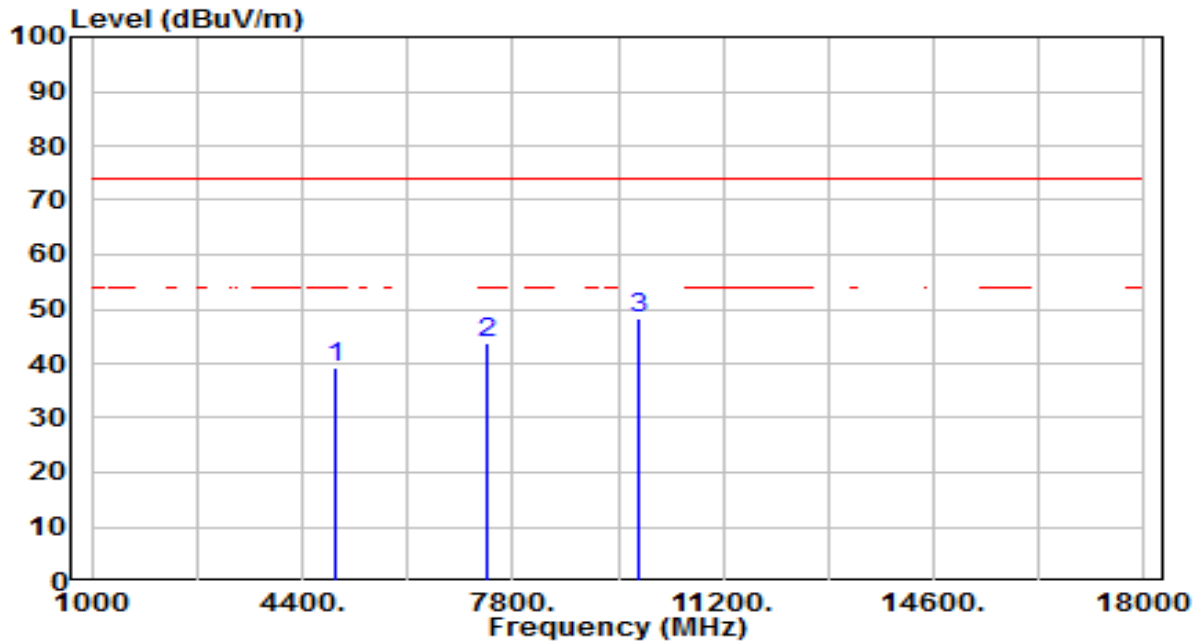


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.34	3.92	39.26	-34.74	74.00	200	235	Peak
2	7386.000	31.53	12.21	43.74	-30.26	74.00	200	31	Peak
3	* 9848.000	32.02	16.14	48.16	-25.84	74.00	200	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

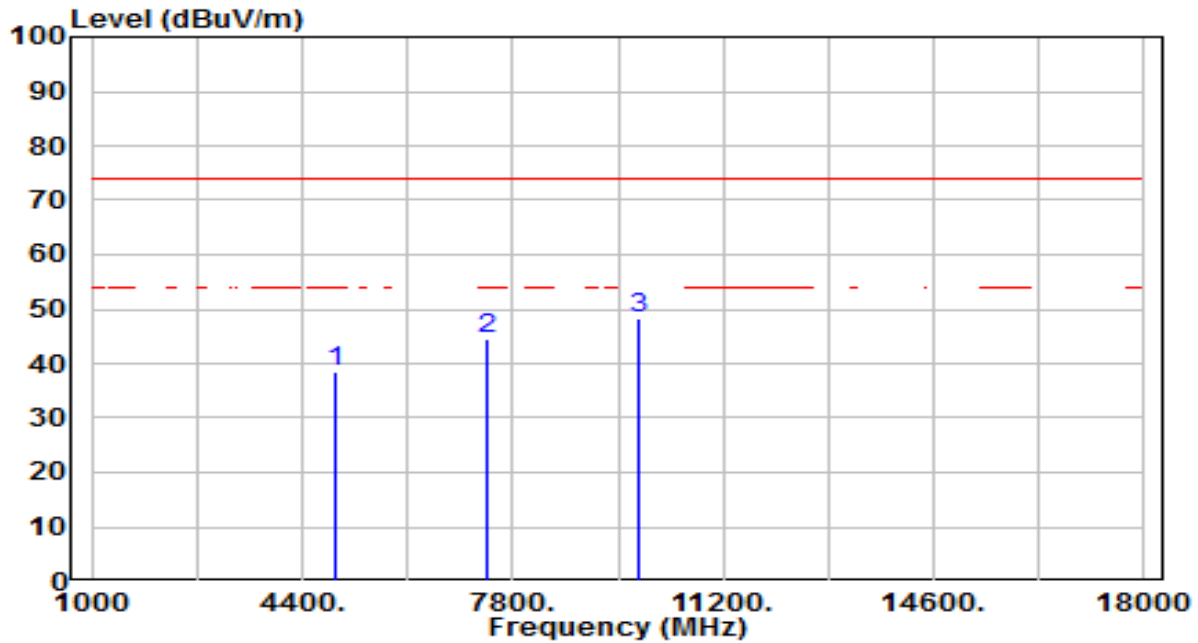


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.66	3.92	38.58	-35.42	74.00	200	179	Peak
2	7386.000	32.20	12.21	44.40	-29.60	74.00	200	194	Peak
3	* 9848.000	32.21	16.14	48.35	-25.65	74.00	200	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

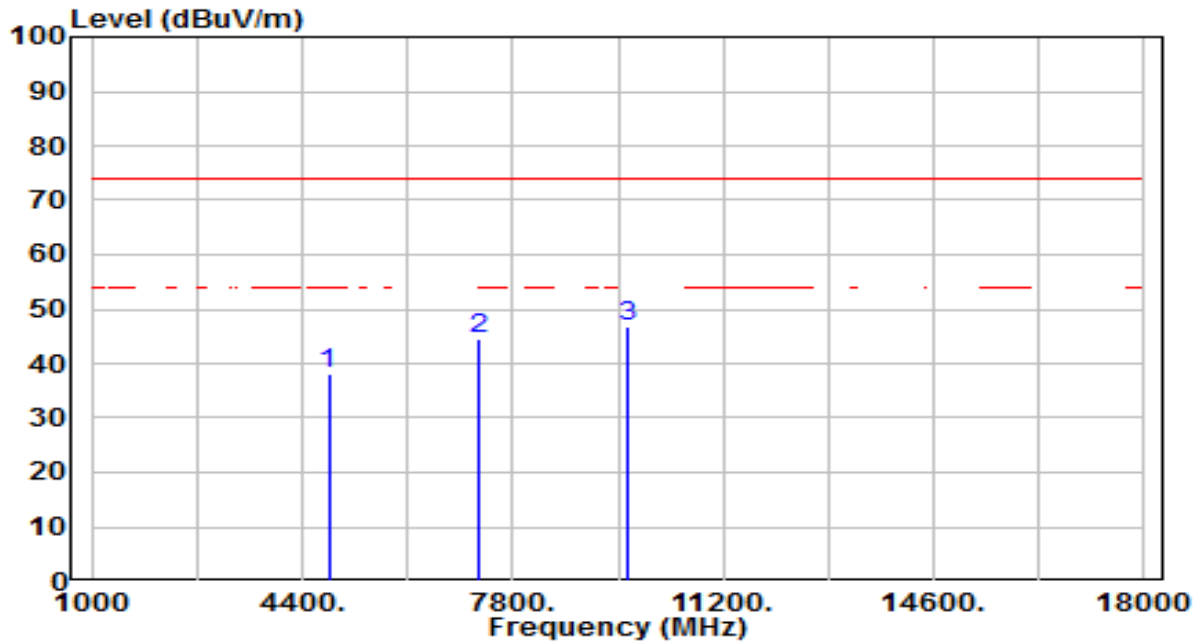


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.26	3.75	38.01	-35.99	74.00	200	255	Peak
2	7236.000	32.81	11.68	44.48	-29.52	74.00	200	20	Peak
3	* 9648.000	31.08	15.77	46.84	-27.16	74.00	200	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

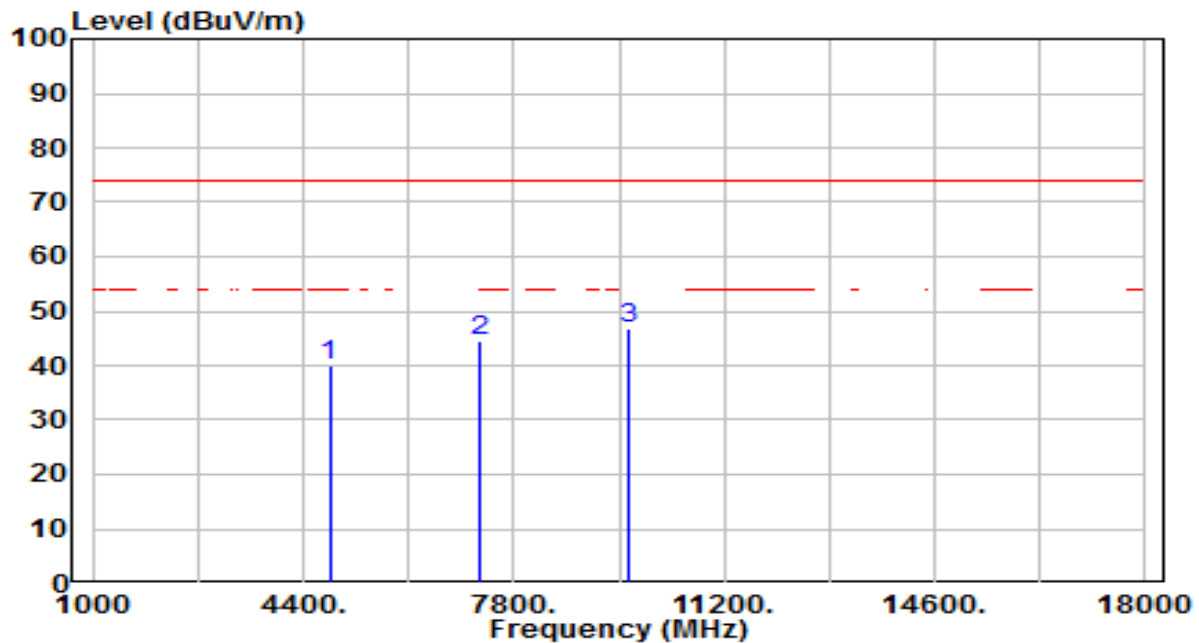


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	36.43	3.75	40.17	-33.83	74.00	200	186	Peak
2	7236.000	32.86	11.68	44.53	-29.47	74.00	200	210	Peak
3	* 9648.000	30.87	15.77	46.64	-27.36	74.00	200	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

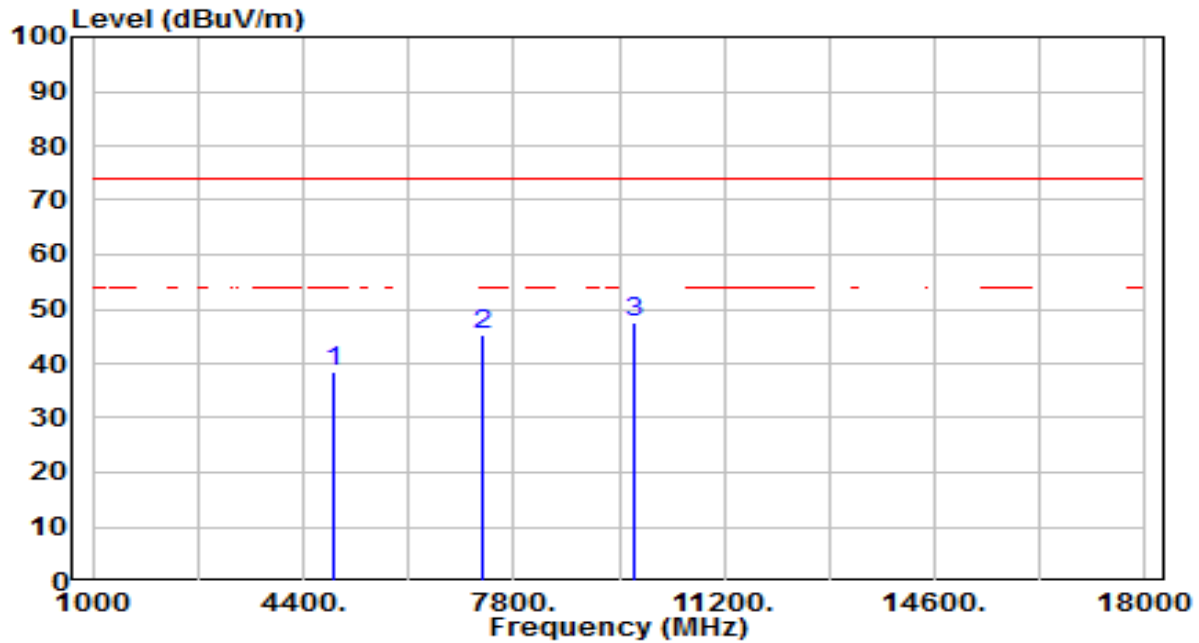


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.72	3.84	38.55	-35.45	74.00	200	277	Peak
2	7311.000	33.42	11.94	45.36	-28.64	74.00	200	149	Peak
3	* 9748.000	31.44	15.95	47.39	-26.61	74.00	200	149	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

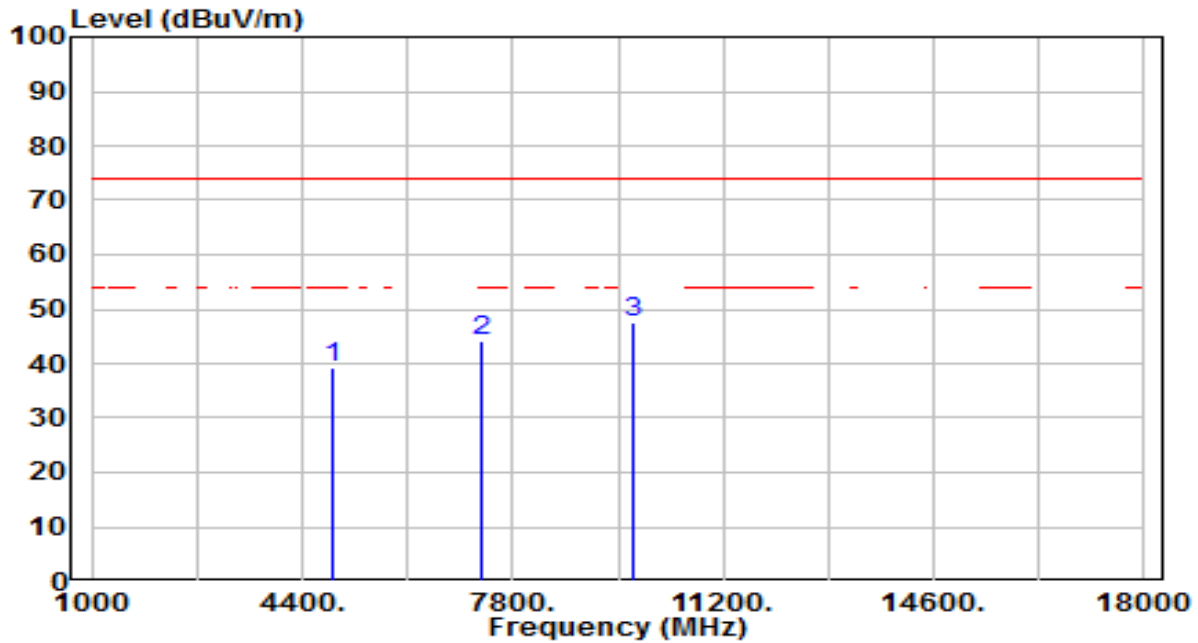


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.50	3.84	39.34	-34.66	74.00	200	178	Peak
2	7311.000	32.25	11.94	44.20	-29.80	74.00	200	26	Peak
3	* 9748.000	31.69	15.95	47.64	-26.36	74.00	200	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

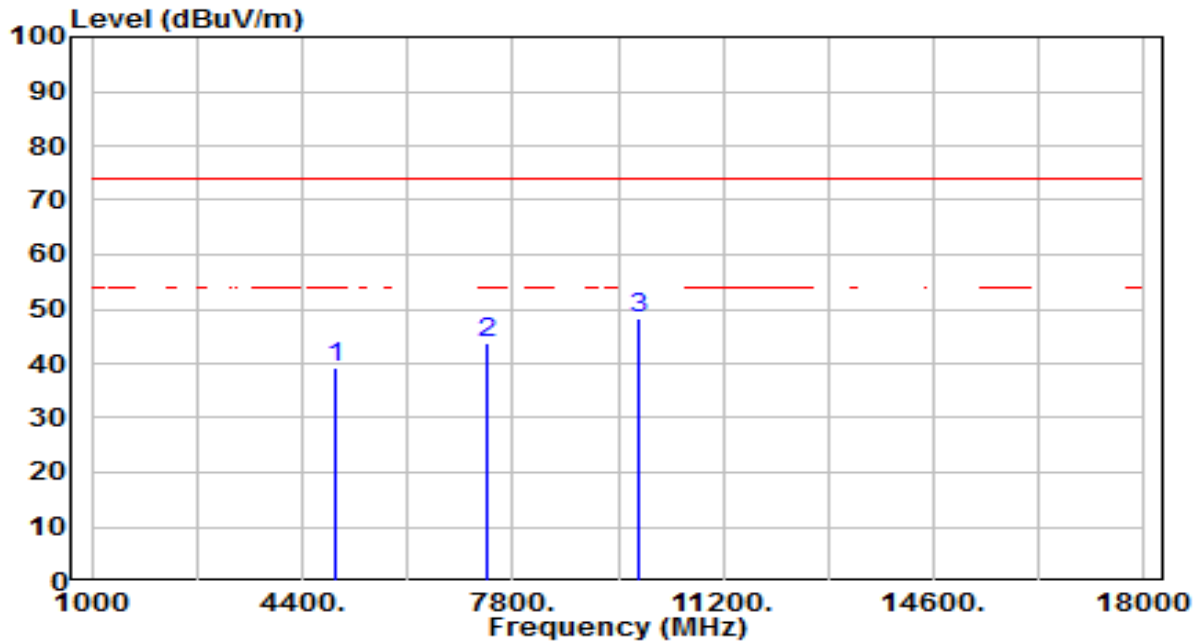


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.46	3.92	39.38	-34.62	74.00	200	234	Peak
2	7386.000	31.69	12.21	43.90	-30.10	74.00	200	344	Peak
3	* 9848.000	32.14	16.14	48.28	-25.72	74.00	200	163	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

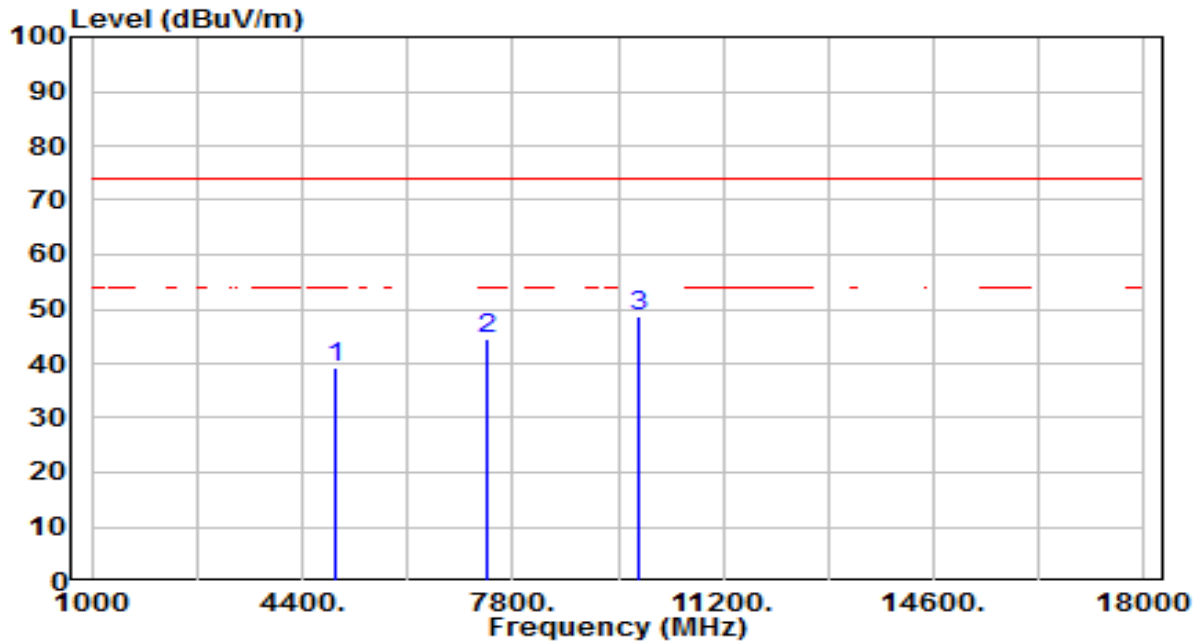


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.14	3.92	39.07	-34.93	74.00	200	3	Peak
2	7386.000	32.30	12.21	44.50	-29.50	74.00	200	201	Peak
3	* 9848.000	32.58	16.14	48.72	-25.28	74.00	200	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

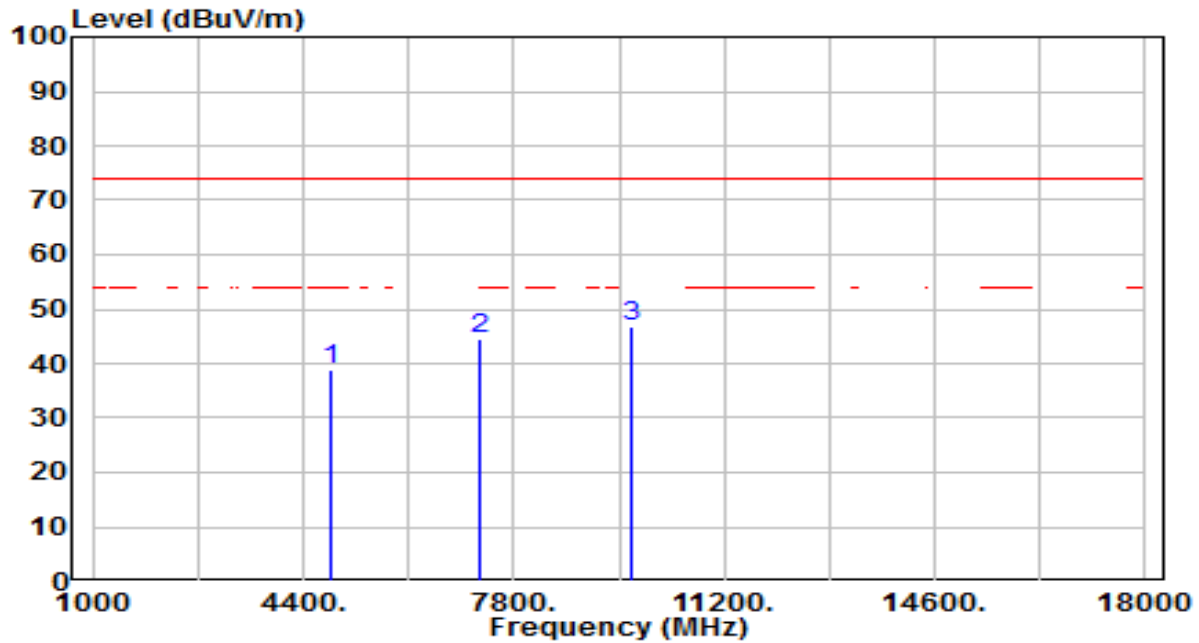


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.10	3.78	38.88	-35.12	74.00	200	151	Peak
2	7266.000	32.86	11.78	44.65	-29.35	74.00	200	340	Peak
3	* 9688.000	30.99	15.84	46.83	-27.17	74.00	200	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

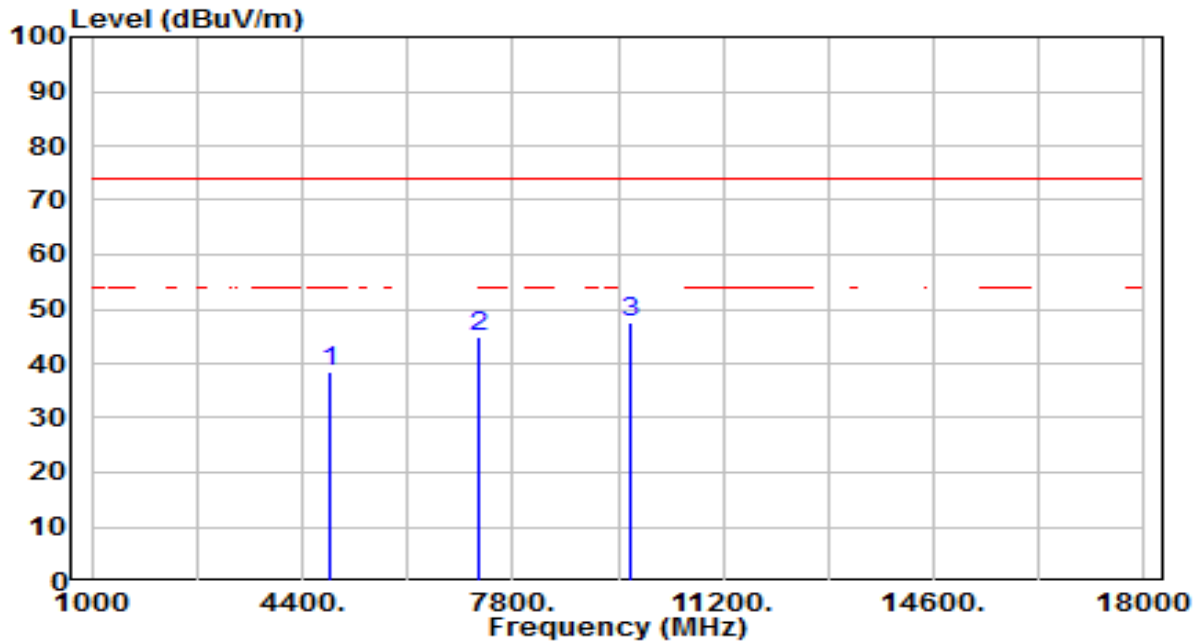


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.85	3.78	38.64	-35.36	74.00	200	71	Peak
2	7266.000	33.08	11.78	44.86	-29.14	74.00	200	311	Peak
3	* 9688.000	31.58	15.84	47.42	-26.58	74.00	200	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

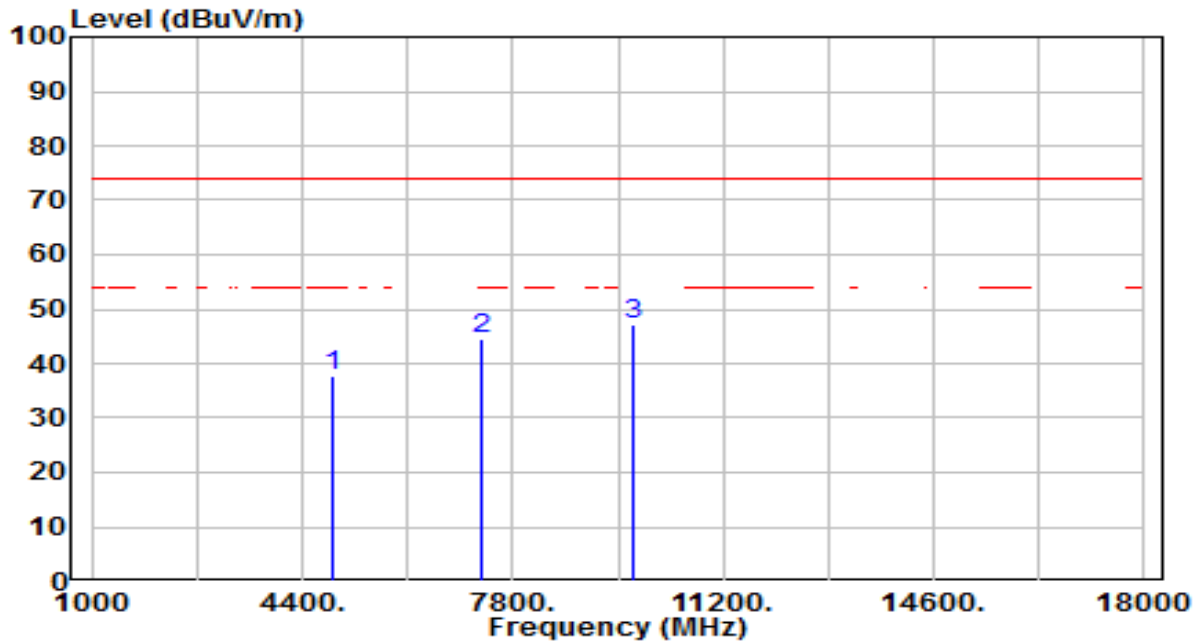


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.88	3.84	37.72	-36.28	74.00	200	360	Peak
2	7311.000	32.45	11.94	44.39	-29.61	74.00	200	177	Peak
3	* 9748.000	31.24	15.95	47.20	-26.80	74.00	200	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

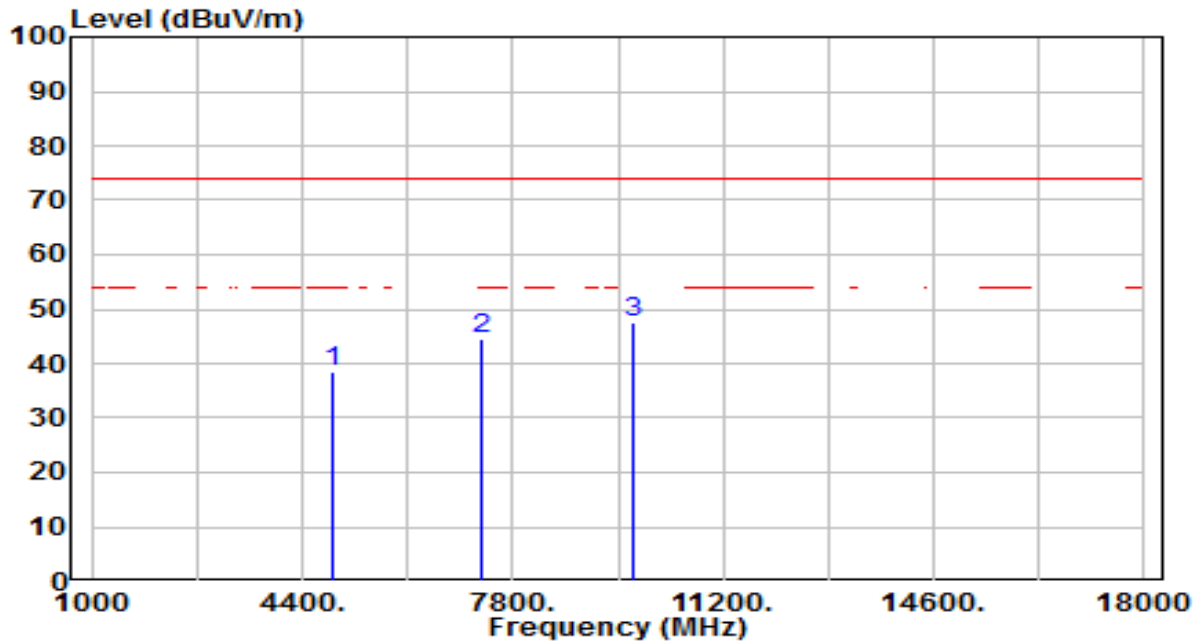


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.76	3.84	38.60	-35.40	74.00	200	202	Peak
2	7311.000	32.69	11.94	44.63	-29.37	74.00	200	75	Peak
3	* 9748.000	31.55	15.95	47.51	-26.49	74.00	200	89	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

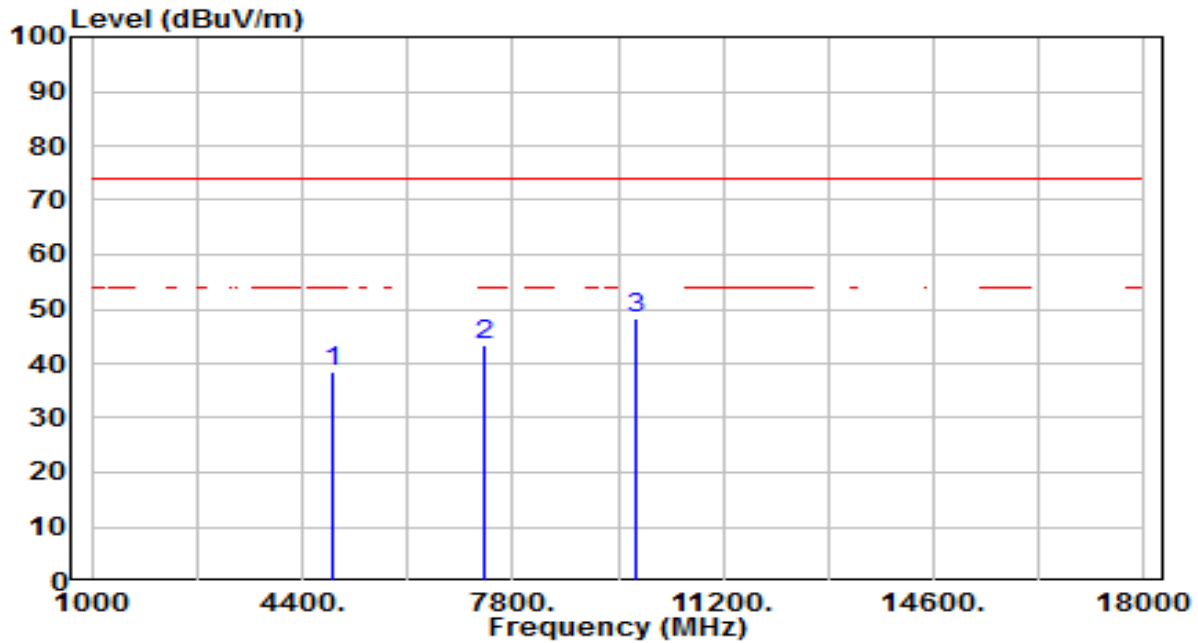


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.61	3.89	38.49	-35.51	74.00	200	234	Peak
2	7356.000	31.12	12.10	43.22	-30.78	74.00	200	3	Peak
3	* 9808.000	32.10	16.06	48.16	-25.84	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

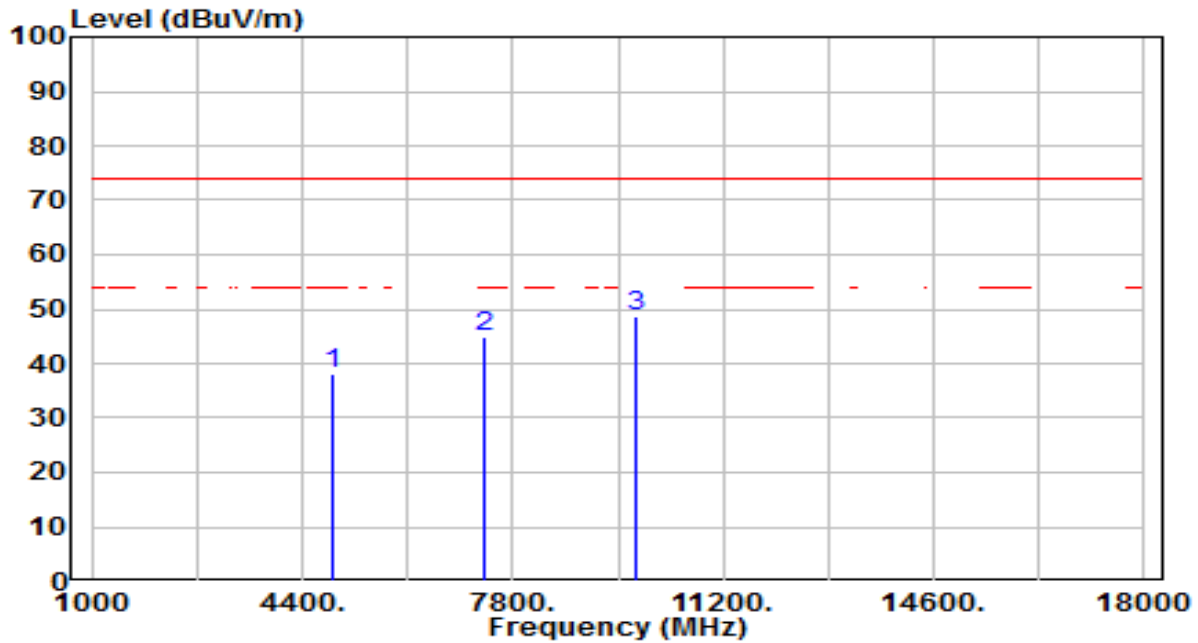


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.07	3.89	37.96	-36.04	74.00	200	319	Peak
2	7356.000	32.85	12.10	44.95	-29.05	74.00	200	202	Peak
3	* 9808.000	32.44	16.06	48.51	-25.49	74.00	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

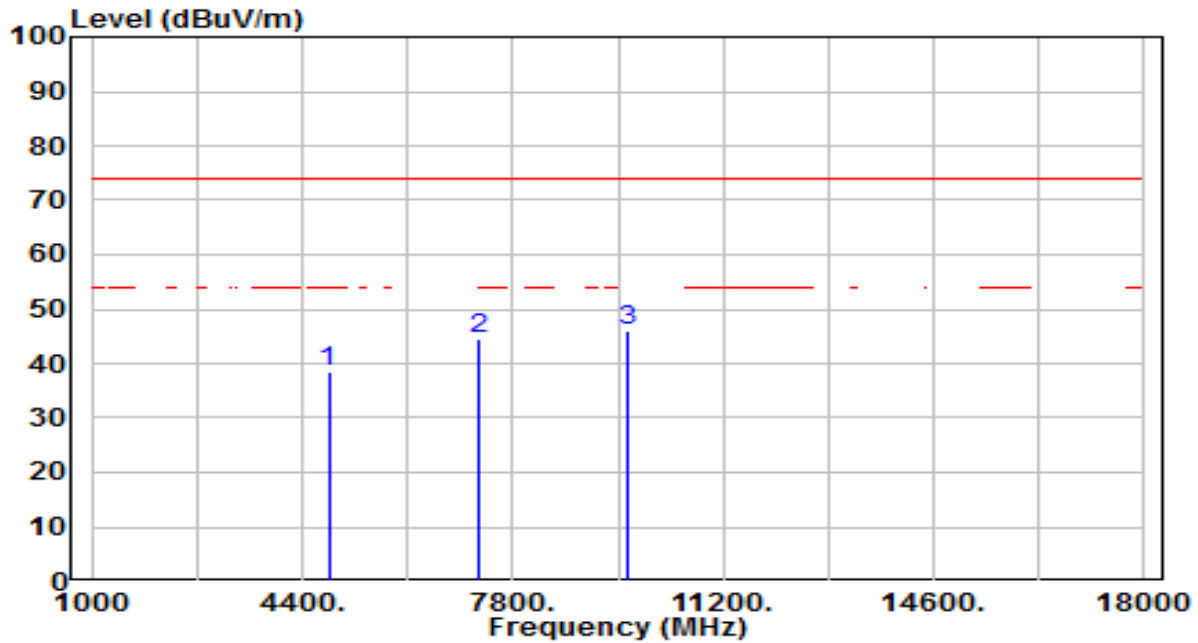


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.58	3.75	38.33	-35.67	74.00	200	292	Peak
2	7236.000	32.95	11.68	44.62	-29.38	74.00	200	266	Peak
3	* 9648.000	30.35	15.77	46.12	-27.88	74.00	200	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

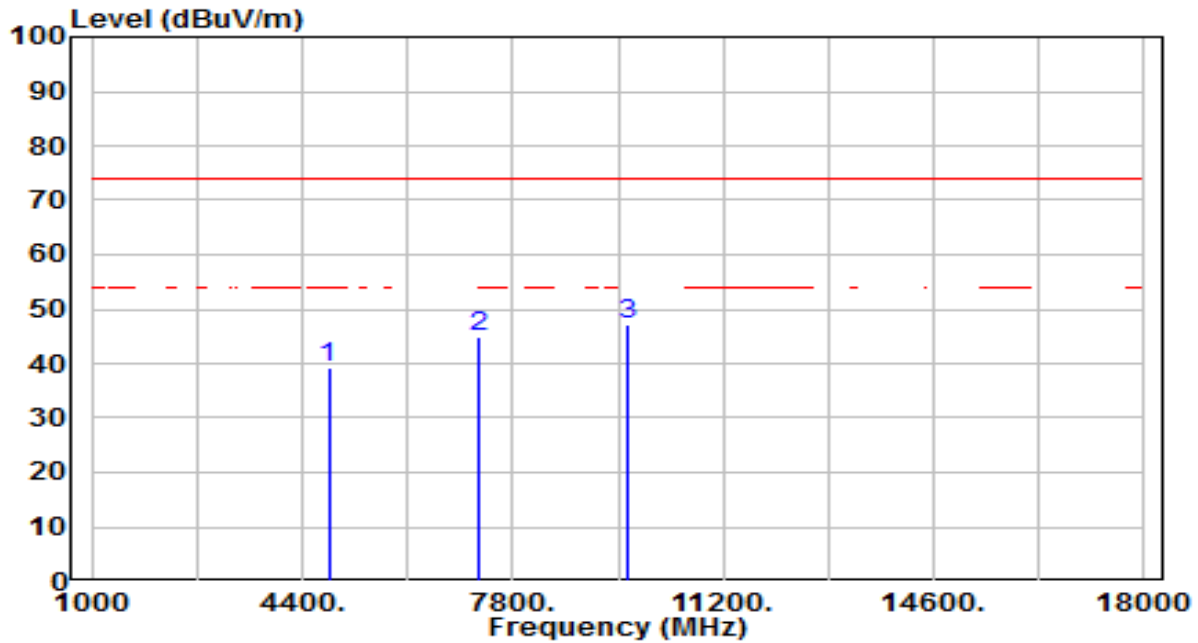


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.68	3.75	39.42	-34.58	74.00	200	172	Peak
2	7236.000	33.20	11.68	44.87	-29.13	74.00	200	190	Peak
3	* 9648.000	31.25	15.77	47.02	-26.98	74.00	200	157	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

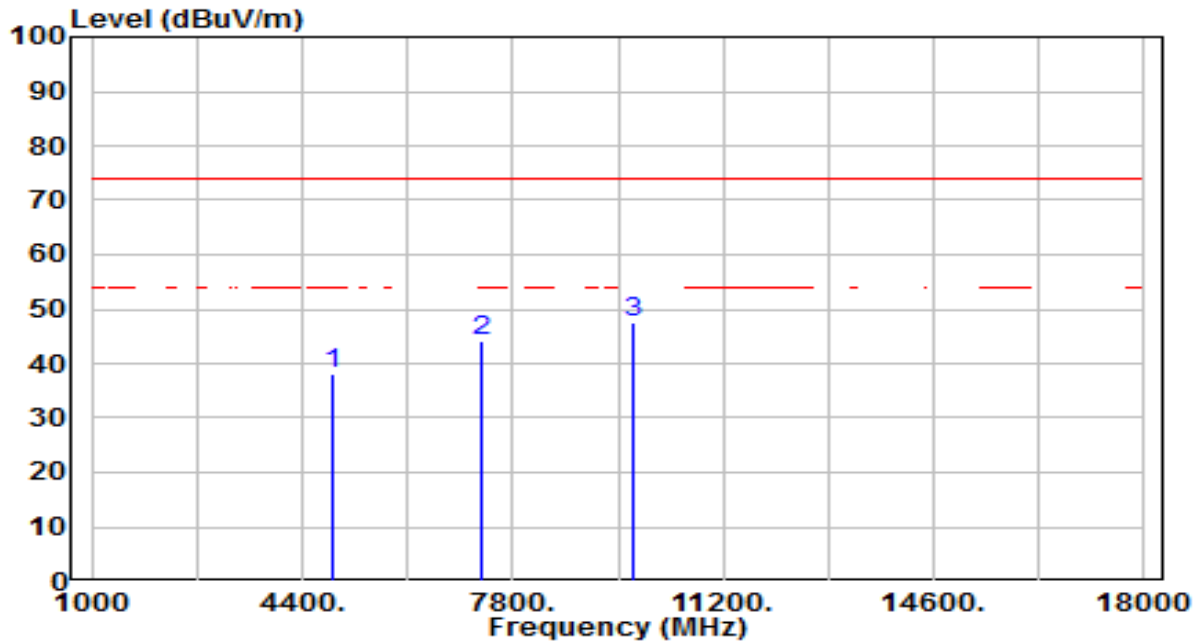


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.33	3.84	38.16	-35.84	74.00	200	220	Peak
2	7311.000	32.39	11.94	44.33	-29.67	74.00	200	230	Peak
3	* 9748.000	31.56	15.95	47.52	-26.48	74.00	200	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

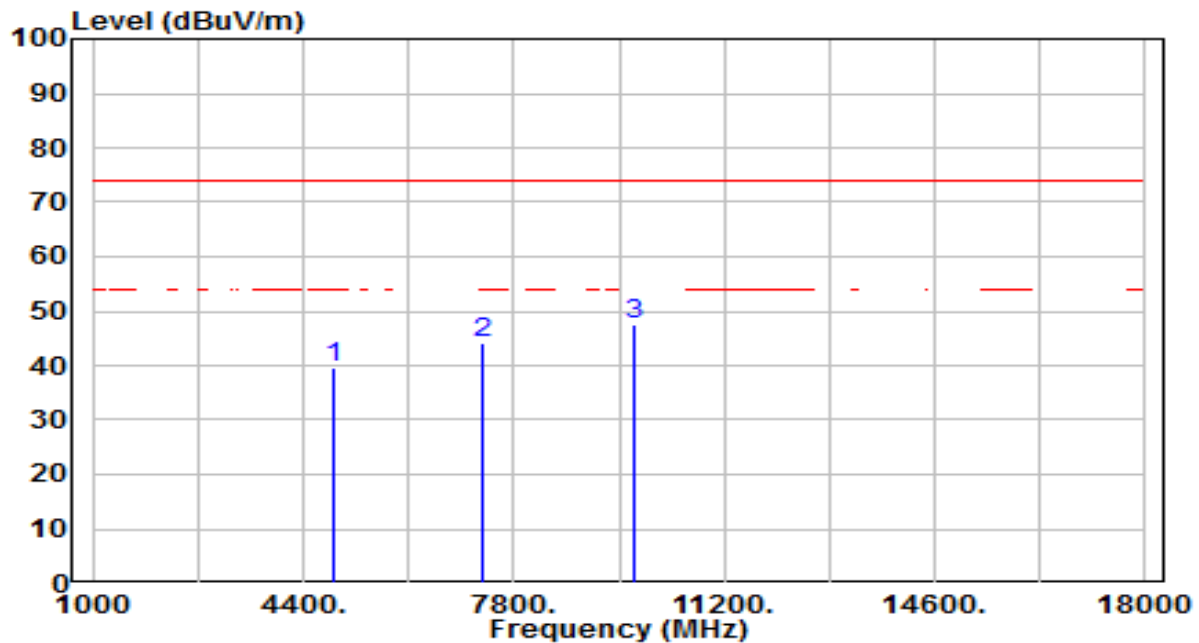


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.69	3.84	39.52	-34.48	74.00	200	162	Peak
2	7311.000	32.03	11.94	43.97	-30.03	74.00	200	261	Peak
3	* 9748.000	31.55	15.95	47.50	-26.50	74.00	200	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

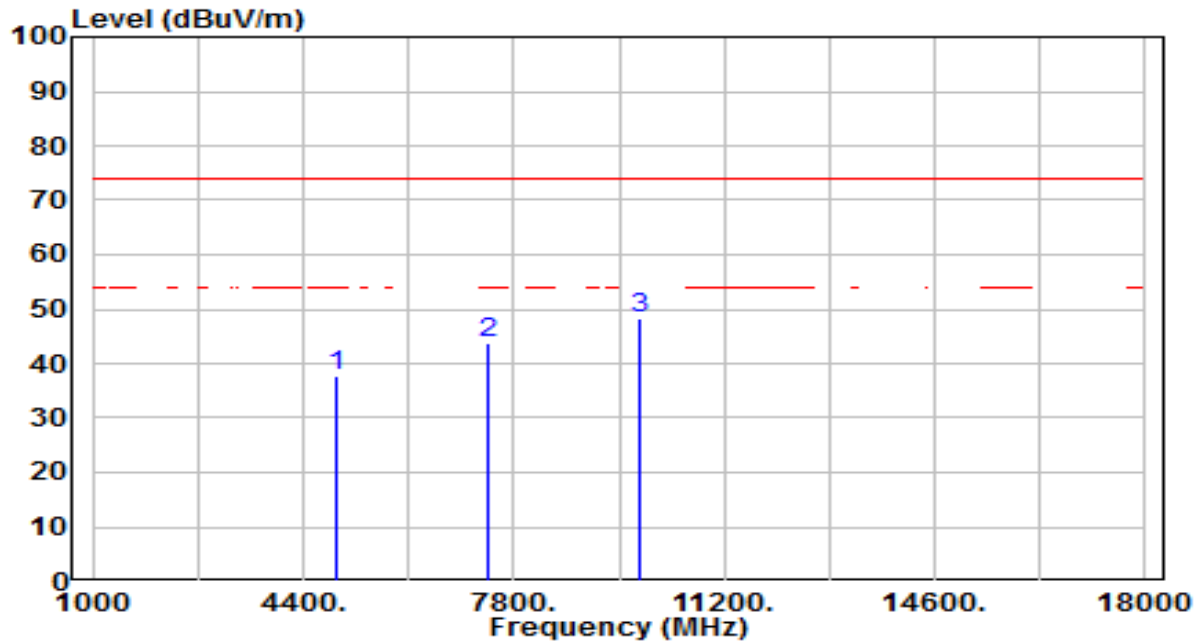


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.71	3.92	37.63	-36.37	74.00	200	245	Peak
2	7386.000	31.48	12.21	43.68	-30.32	74.00	200	63	Peak
3	* 9848.000	32.18	16.14	48.32	-25.68	74.00	200	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

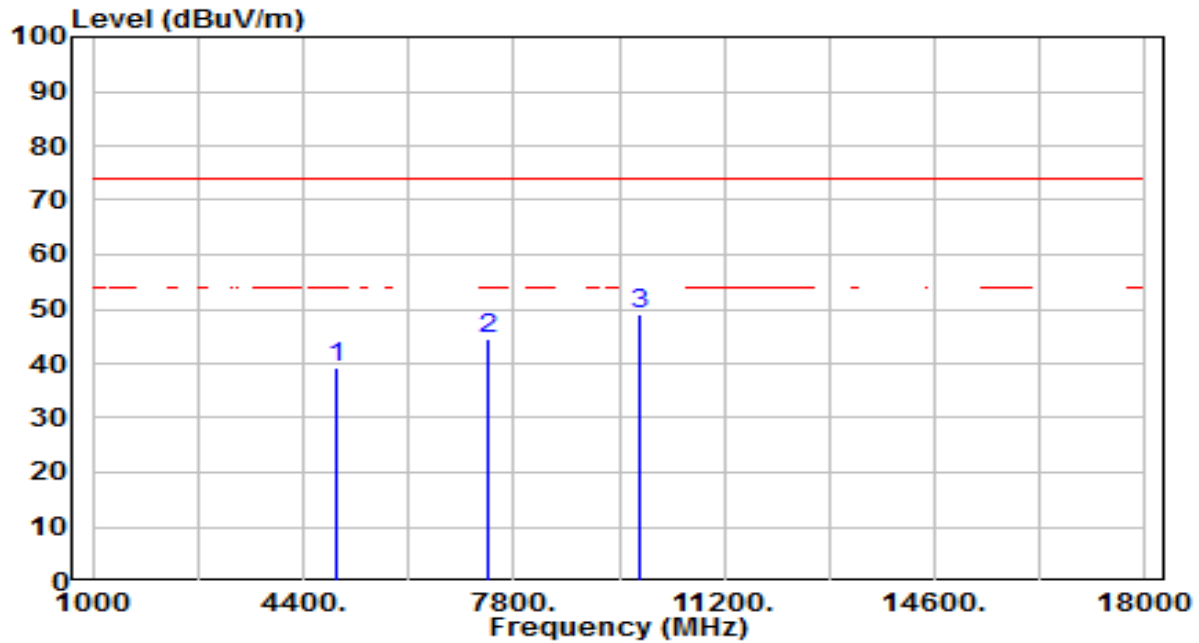


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.48	3.92	39.40	-34.60	74.00	200	58	Peak
2	7386.000	32.37	12.21	44.58	-29.42	74.00	200	130	Peak
3	* 9848.000	32.75	16.14	48.89	-25.11	74.00	200	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

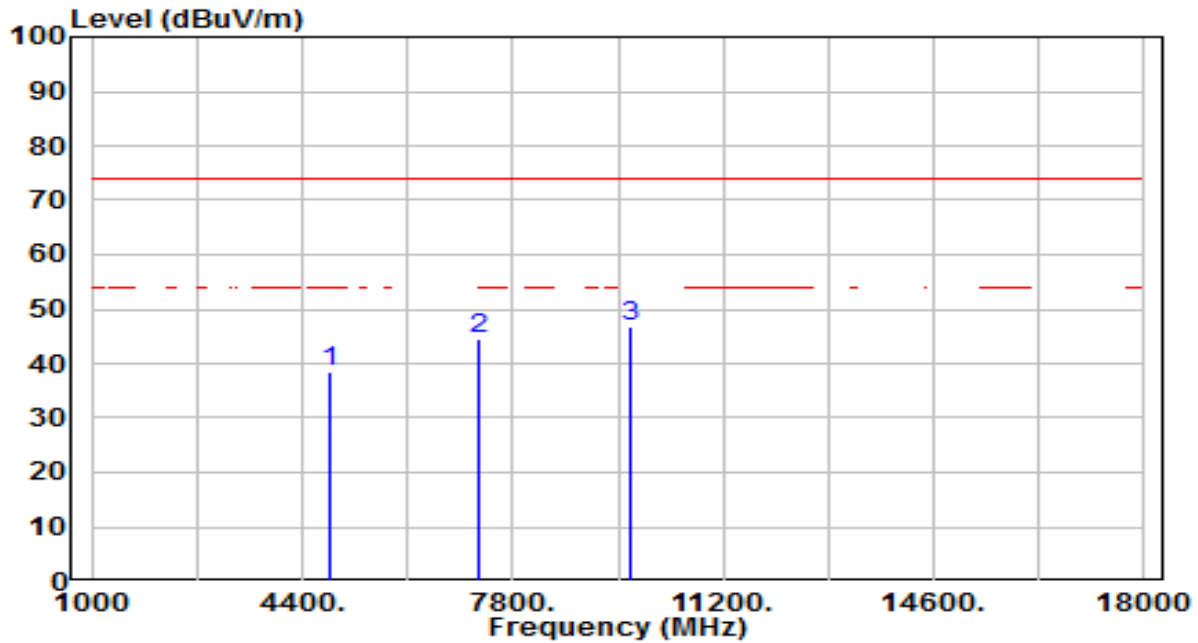


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.58	3.78	38.36	-35.64	74.00	200	169	Peak
2	7266.000	32.61	11.78	44.39	-29.61	74.00	200	229	Peak
3	* 9688.000	30.96	15.84	46.81	-27.19	74.00	200	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

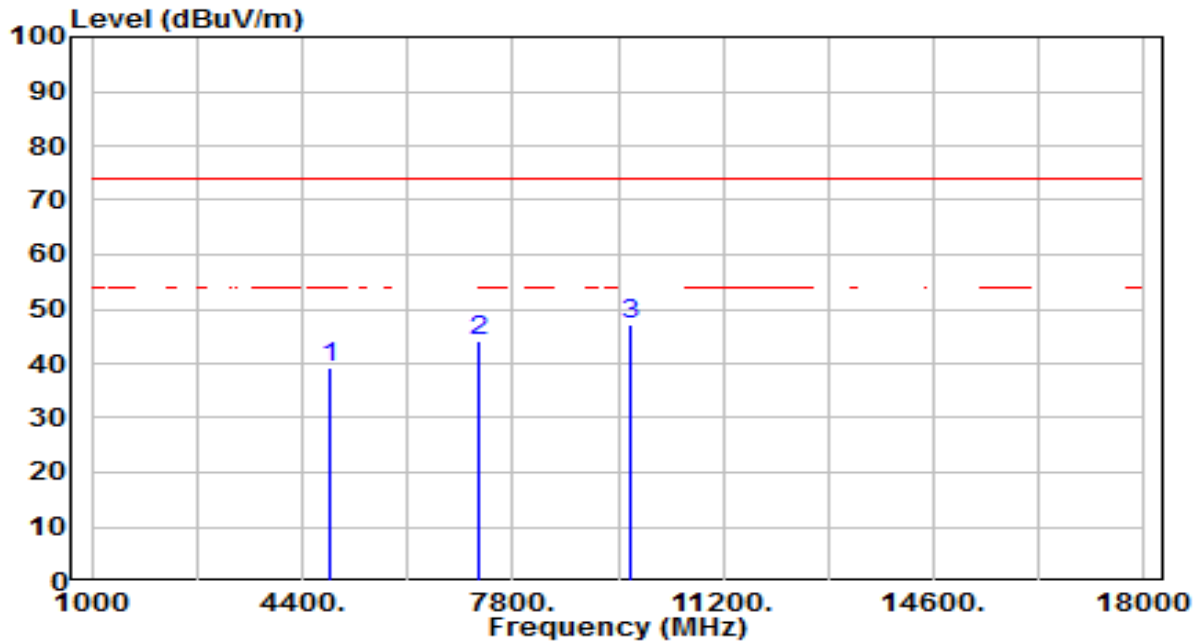


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.33	3.78	39.11	-34.89	74.00	200	187	Peak
2	7266.000	32.42	11.78	44.20	-29.80	74.00	200	359	Peak
3	* 9688.000	31.14	15.84	46.99	-27.01	74.00	200	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

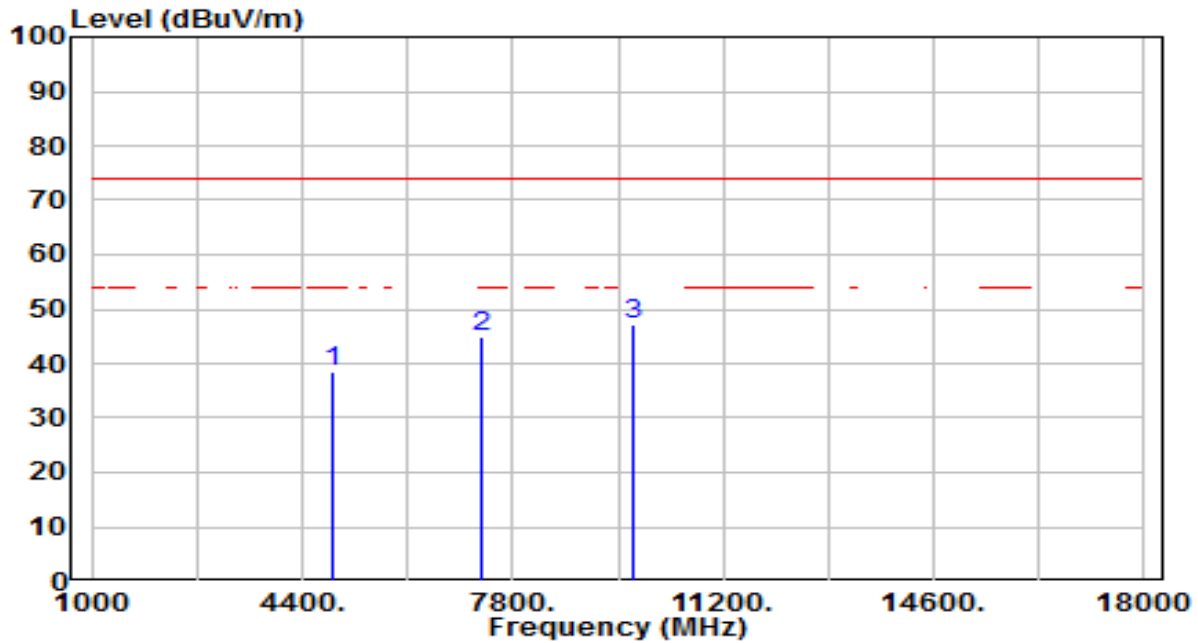


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.77	3.84	38.61	-35.39	74.00	200	238	Peak
2	7311.000	32.88	11.94	44.83	-29.17	74.00	200	242	Peak
3	* 9748.000	31.09	15.95	47.05	-26.95	74.00	200	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

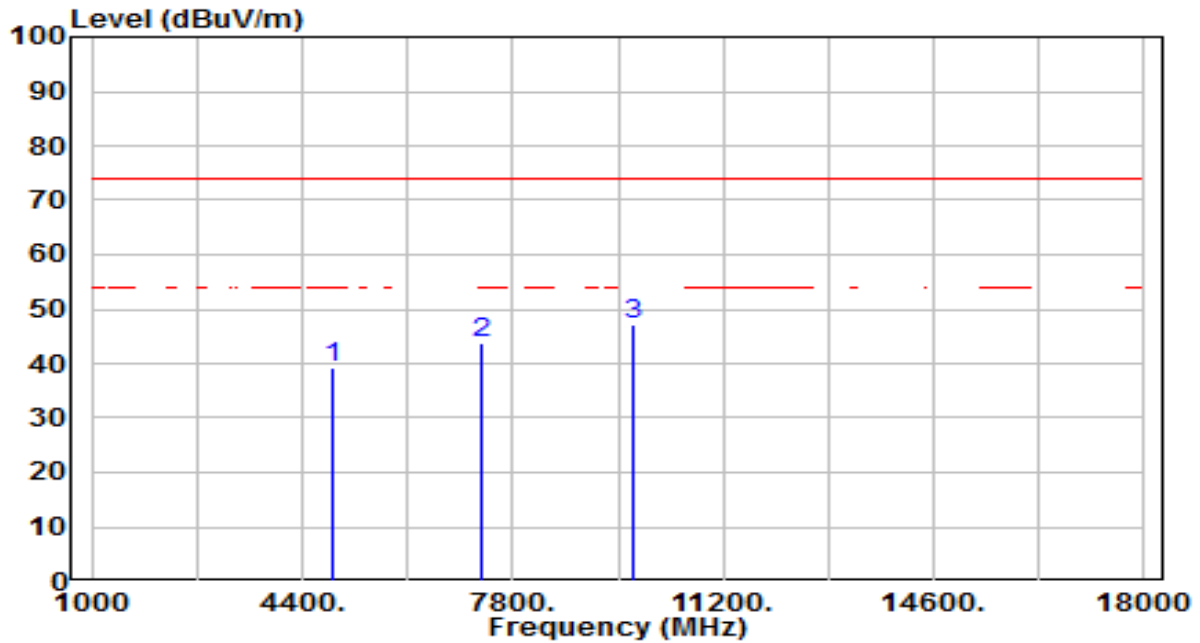


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.24	3.84	39.07	-34.93	74.00	200	173	Peak
2	7311.000	31.79	11.94	43.73	-30.27	74.00	200	187	Peak
3	* 9748.000	31.14	15.95	47.09	-26.91	74.00	200	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

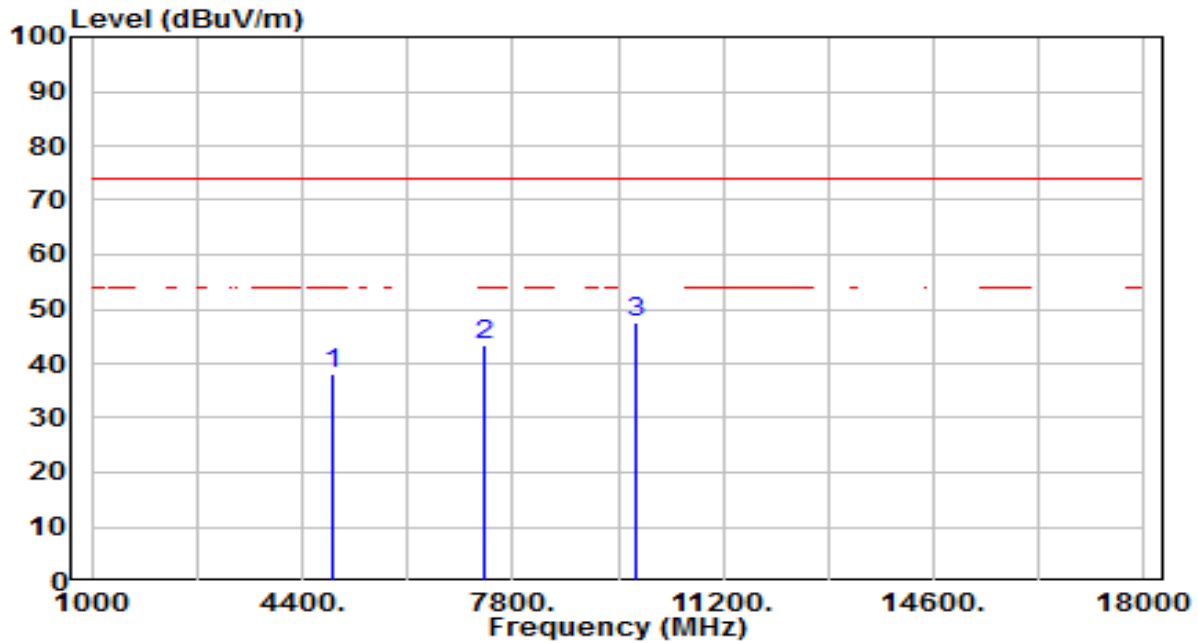


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.40	3.89	38.29	-35.71	74.00	200	194	Peak
2	7356.000	31.36	12.10	43.46	-30.54	74.00	200	222	Peak
3	* 9808.000	31.54	16.06	47.60	-26.40	74.00	200	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

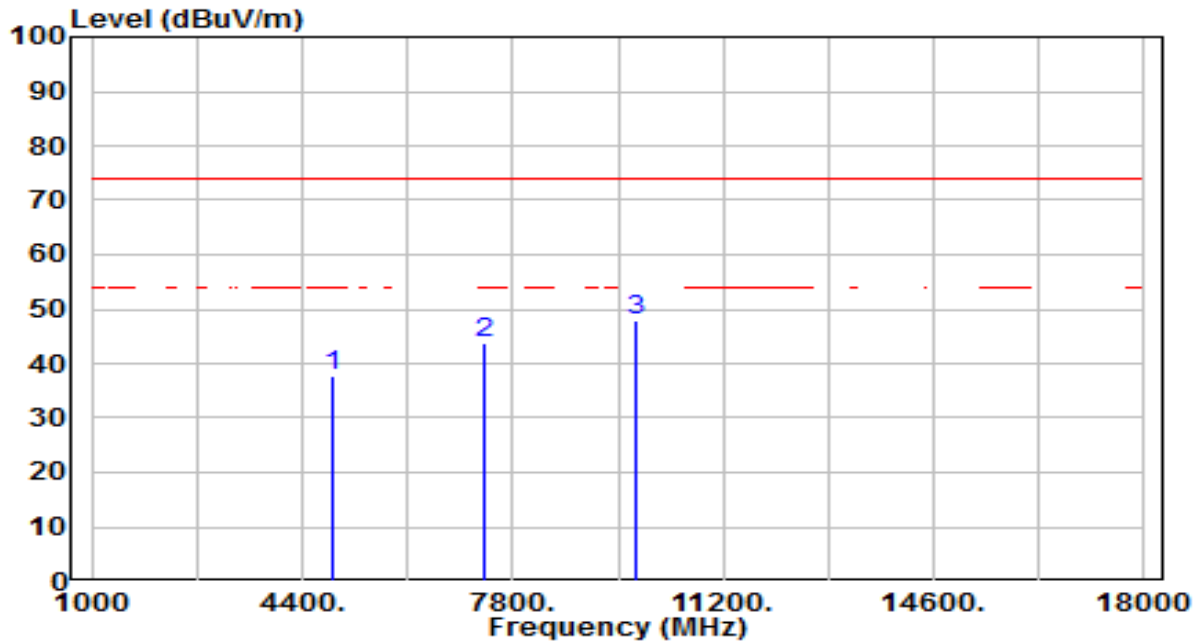


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	33.80	3.89	37.69	-36.31	74.00	200	147	Peak
2		7356.000	31.59	12.10	43.69	-30.31	74.00	200	272	Peak
3	*	9808.000	31.89	16.06	47.96	-26.04	74.00	200	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

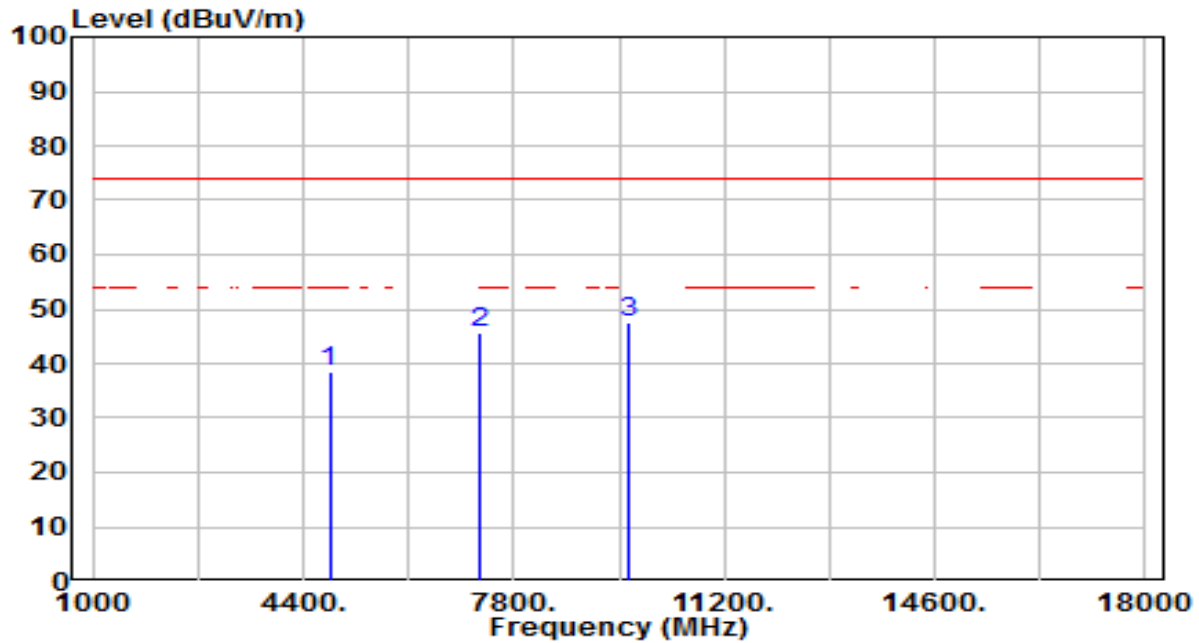


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.87	3.75	38.62	-35.38	74.00	200	280	Peak
2	7236.000	33.92	11.68	45.59	-28.41	74.00	200	219	Peak
3	* 9648.000	31.94	15.77	47.71	-26.29	74.00	200	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

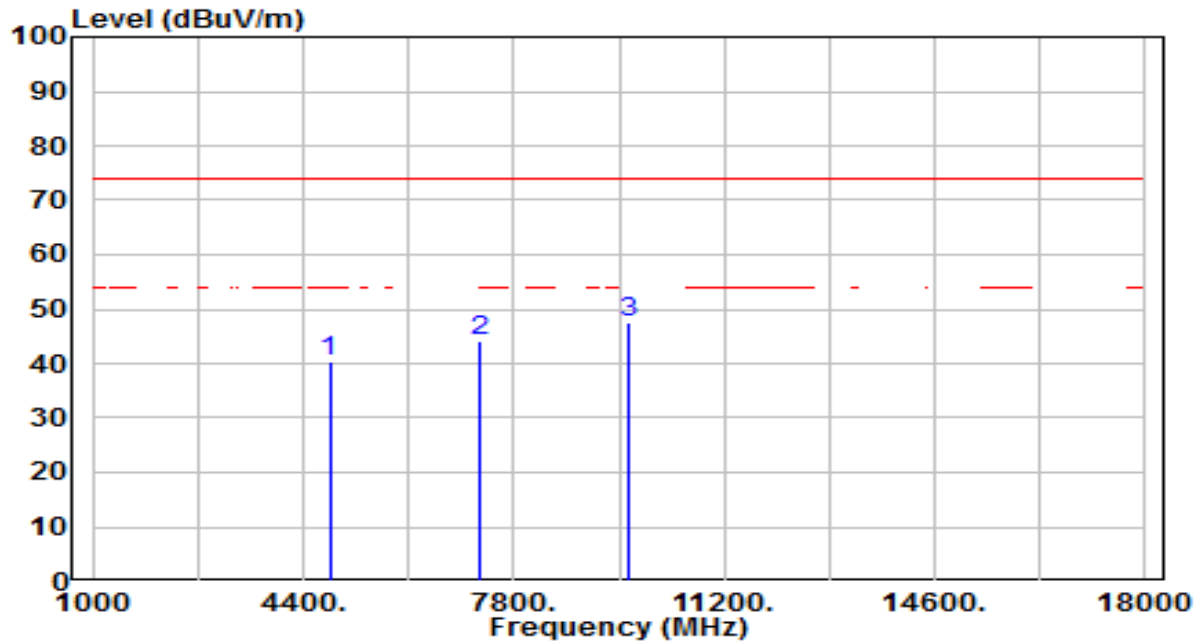


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	36.54	3.75	40.29	-33.71	74.00	200	169	Peak
2	7236.000	32.59	11.68	44.26	-29.74	74.00	200	243	Peak
3	* 9648.000	31.76	15.77	47.53	-26.47	74.00	200	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

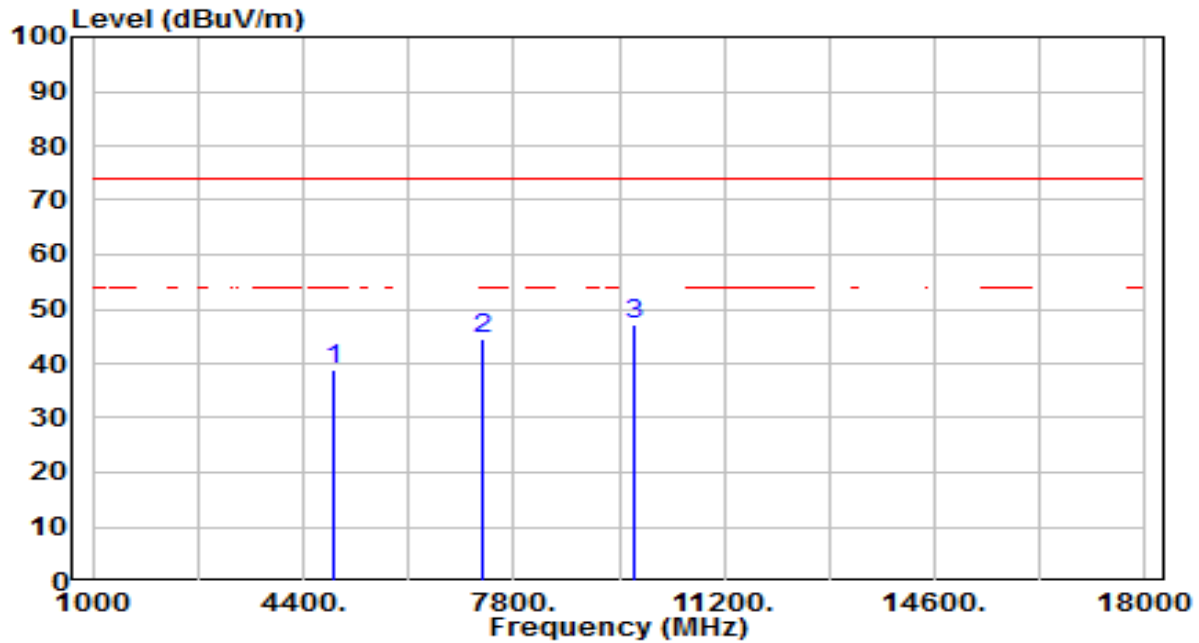


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.07	3.84	38.90	-35.10	74.00	200	16	Peak
2	7311.000	32.68	11.94	44.63	-29.37	74.00	200	244	Peak
3	* 9748.000	31.39	15.95	47.34	-26.66	74.00	200	241	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

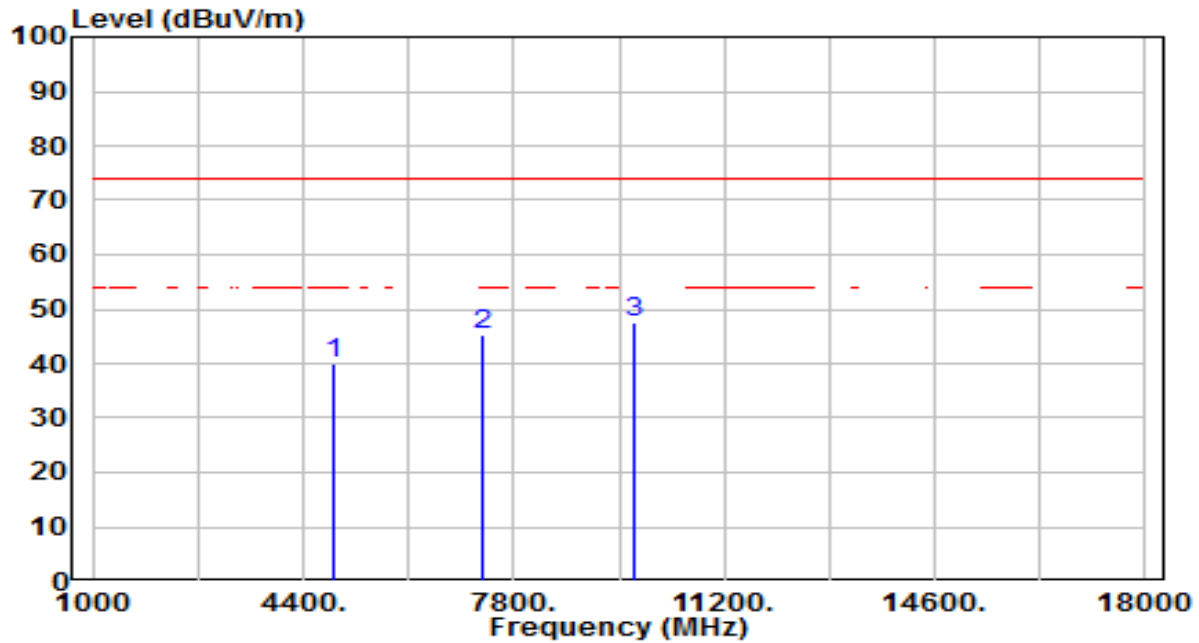


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.11	3.84	39.95	-34.05	74.00	200	177	Peak
2	7311.000	33.18	11.94	45.12	-28.88	74.00	200	287	Peak
3	* 9748.000	31.45	15.95	47.40	-26.60	74.00	200	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

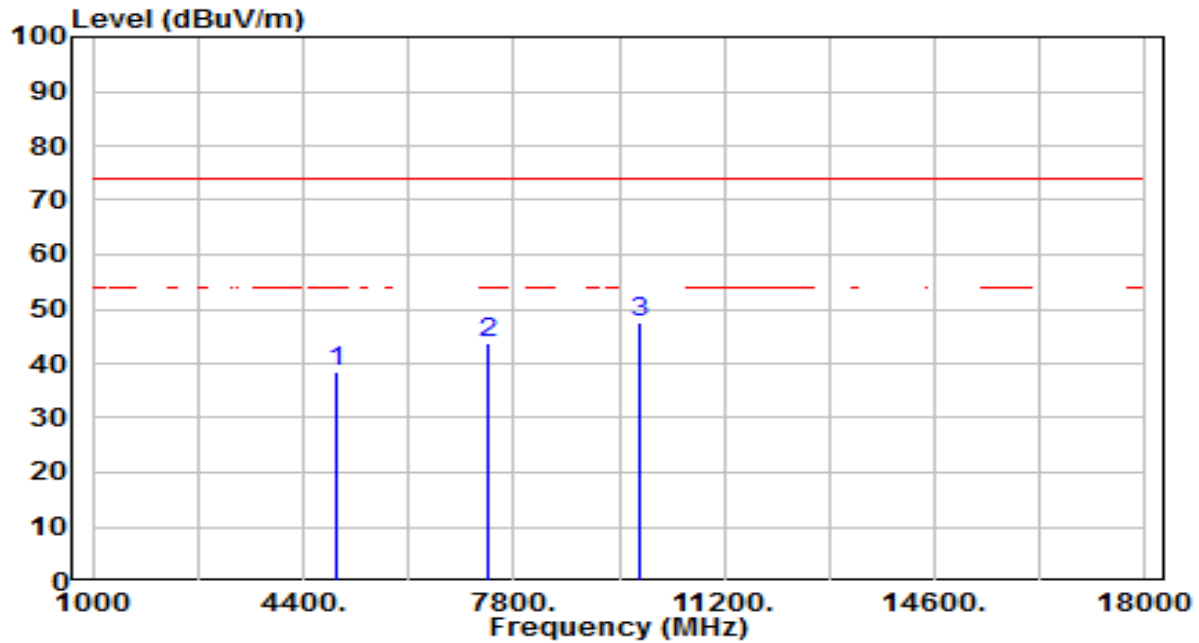


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.56	3.92	38.49	-35.51	74.00	200	234	Peak
2	7386.000	31.71	12.21	43.91	-30.09	74.00	200	273	Peak
3	* 9848.000	31.45	16.14	47.59	-26.41	74.00	200	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

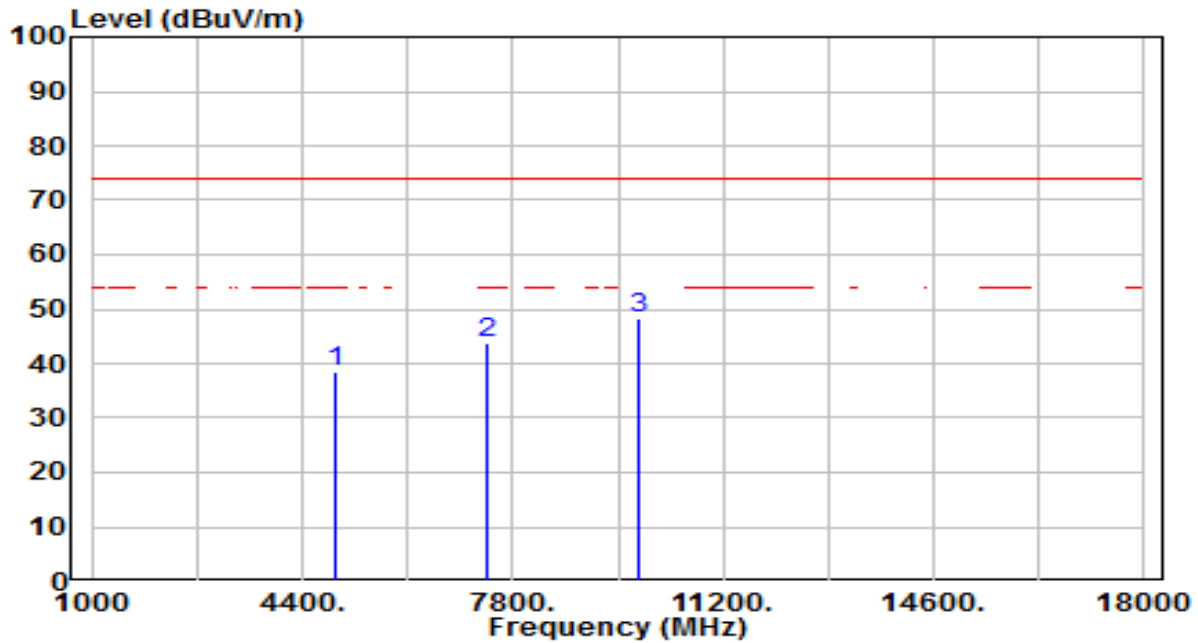


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.42	3.92	38.34	-35.66	74.00	200	262	Peak
2	7386.000	31.59	12.21	43.79	-30.21	74.00	200	138	Peak
3	* 9848.000	32.34	16.14	48.48	-25.52	74.00	200	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

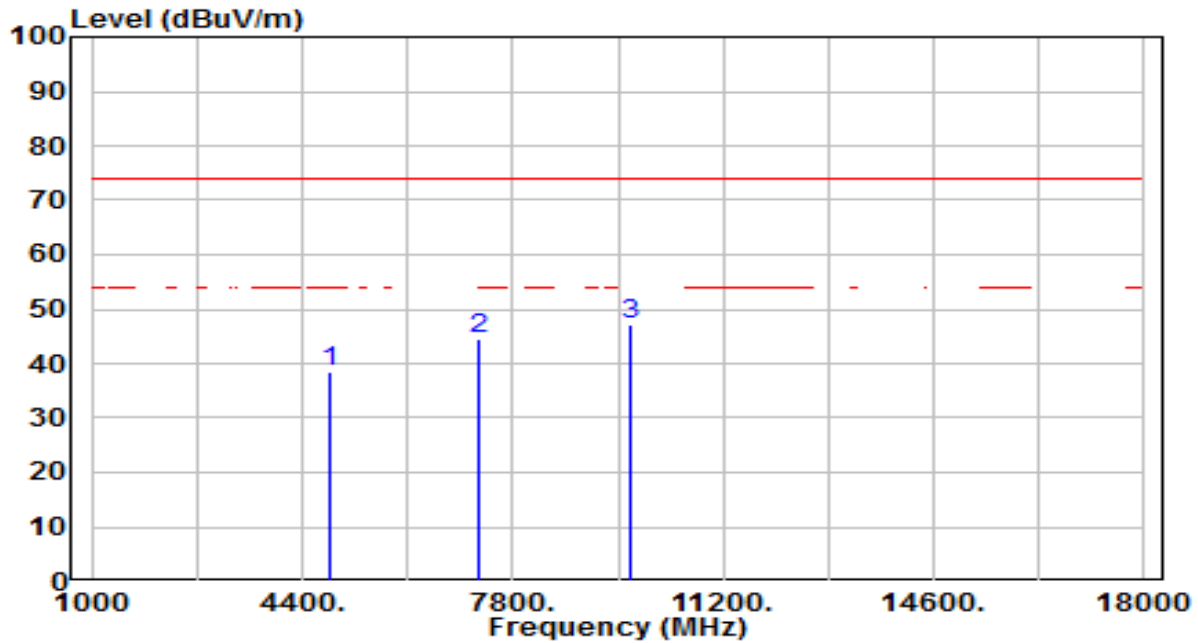


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.76	3.78	38.54	-35.46	74.00	200	112	Peak
2	7266.000	32.75	11.78	44.53	-29.47	74.00	200	158	Peak
3	* 9688.000	31.24	15.84	47.09	-26.91	74.00	200	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

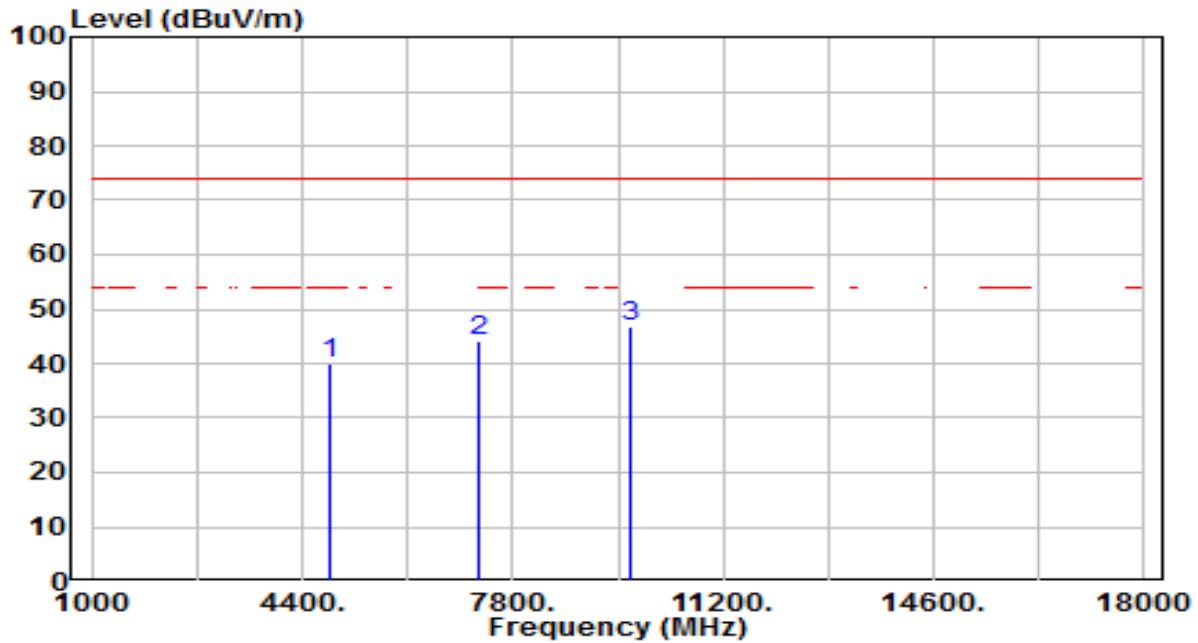


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	36.10	3.78	39.88	-34.12	74.00	200	220	Peak
2	7266.000	32.28	11.78	44.06	-29.94	74.00	200	110	Peak
3	* 9688.000	31.10	15.84	46.95	-27.05	74.00	200	272	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

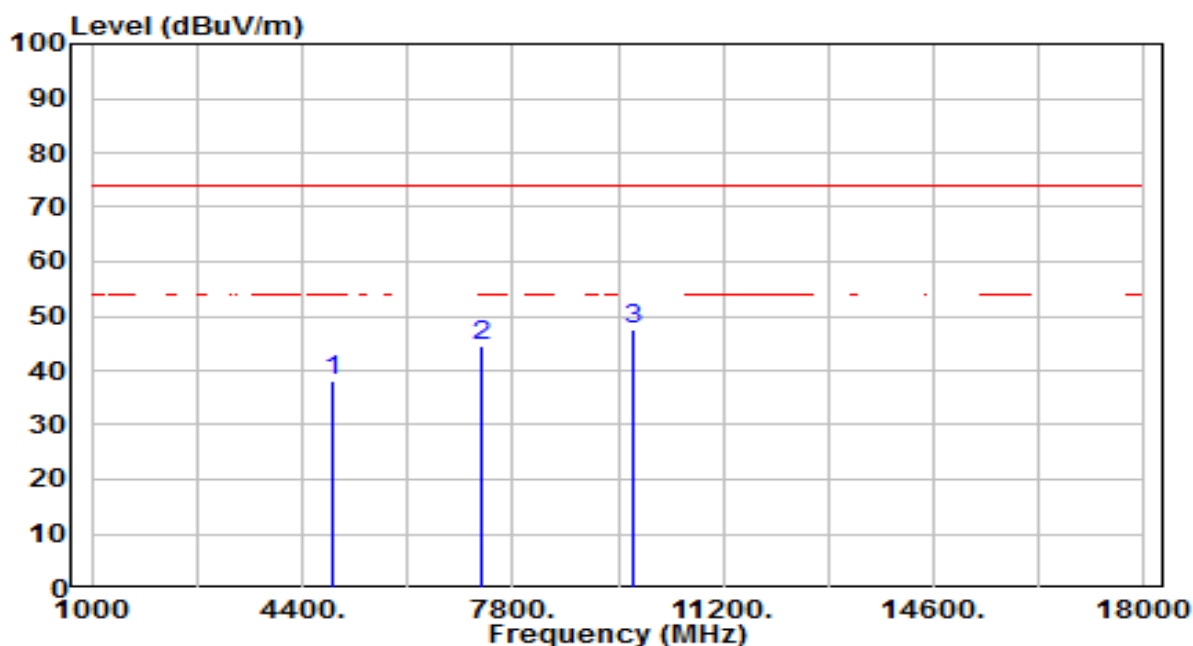


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.34	3.84	38.18	-35.82	74.00	200	252	Peak
2	7311.000	32.71	11.94	44.65	-29.35	74.00	200	159	Peak
3	* 9748.000	31.41	15.95	47.36	-26.64	74.00	200	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

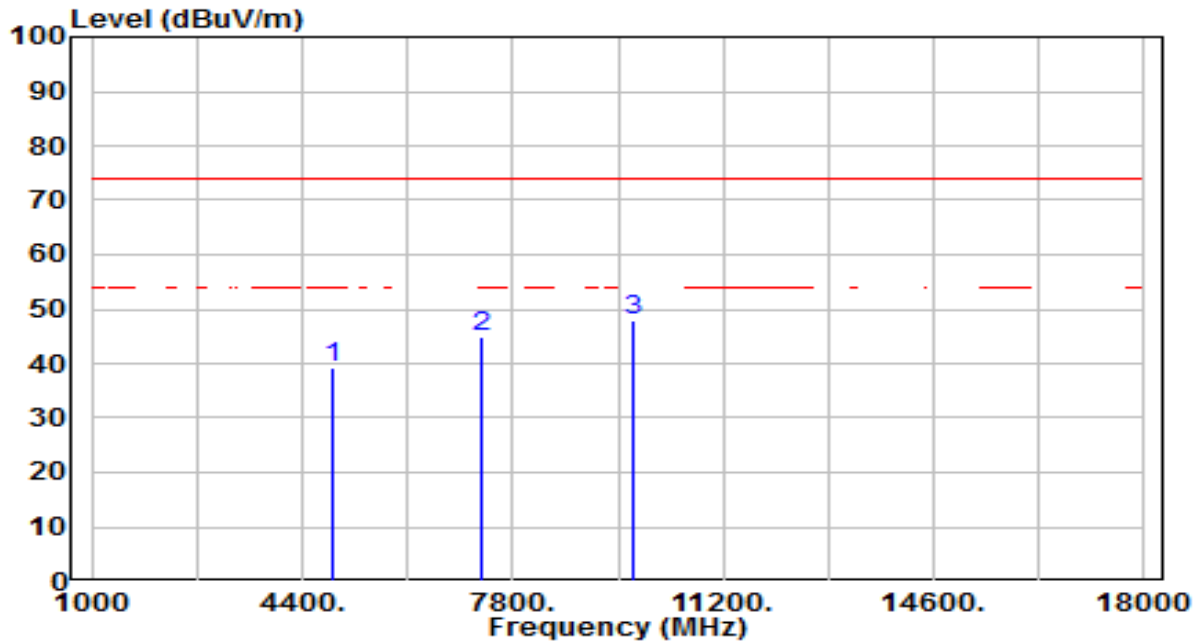


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.26	3.84	39.10	-34.90	74.00	200	168	Peak
2	7311.000	32.94	11.94	44.88	-29.12	74.00	200	326	Peak
3	* 9748.000	32.16	15.95	48.11	-25.89	74.00	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

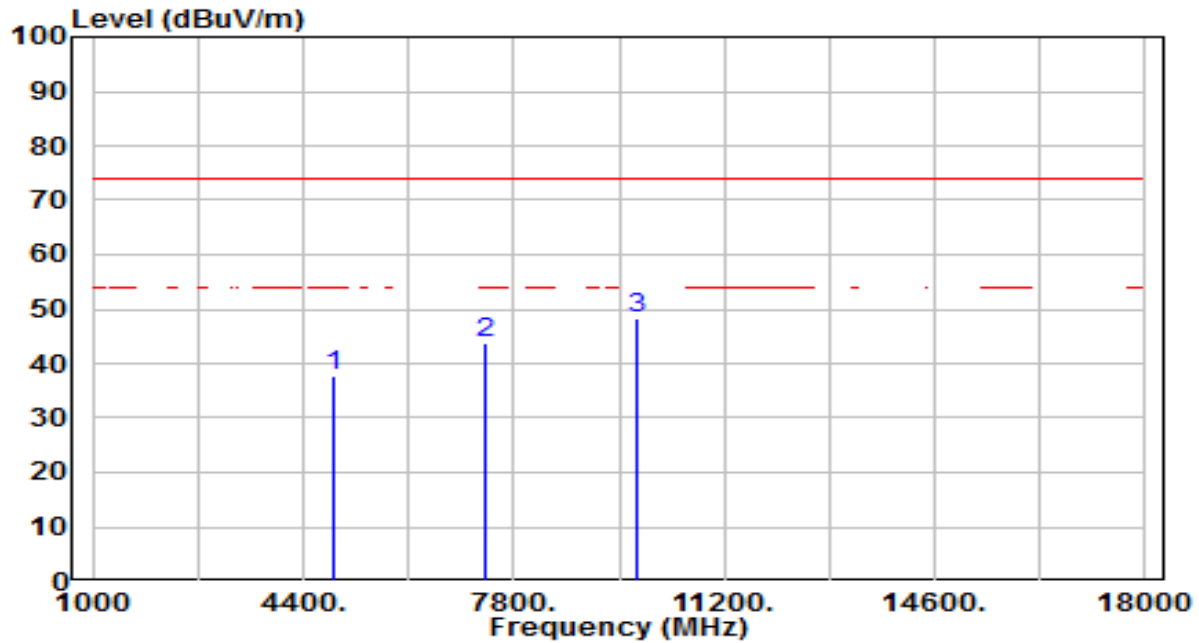


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.99	3.89	37.88	-36.12	74.00	200	333	Peak
2	7356.000	31.59	12.10	43.69	-30.31	74.00	200	237	Peak
3	* 9808.000	32.22	16.06	48.29	-25.71	74.00	200	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

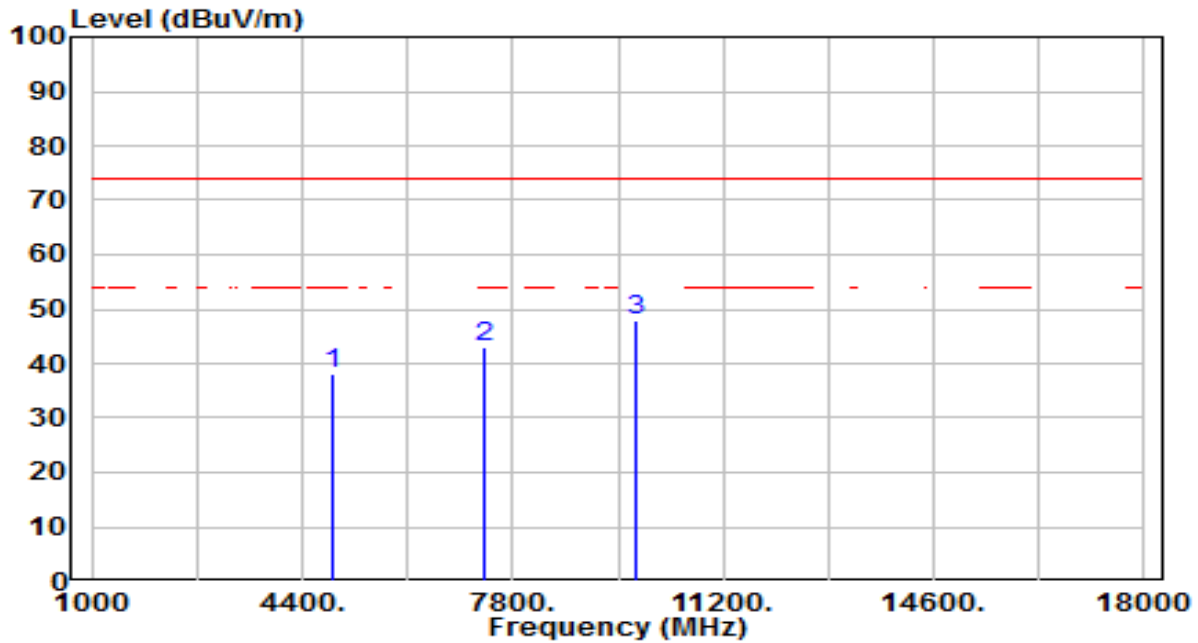


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.22	3.89	38.11	-35.89	74.00	200	244	Peak
2	7356.000	31.08	12.10	43.18	-30.82	74.00	200	322	Peak
3	* 9808.000	31.92	16.06	47.99	-26.01	74.00	200	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-02-10
Factor	BBHA 9170	Temp. / Humidity	19°C /46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

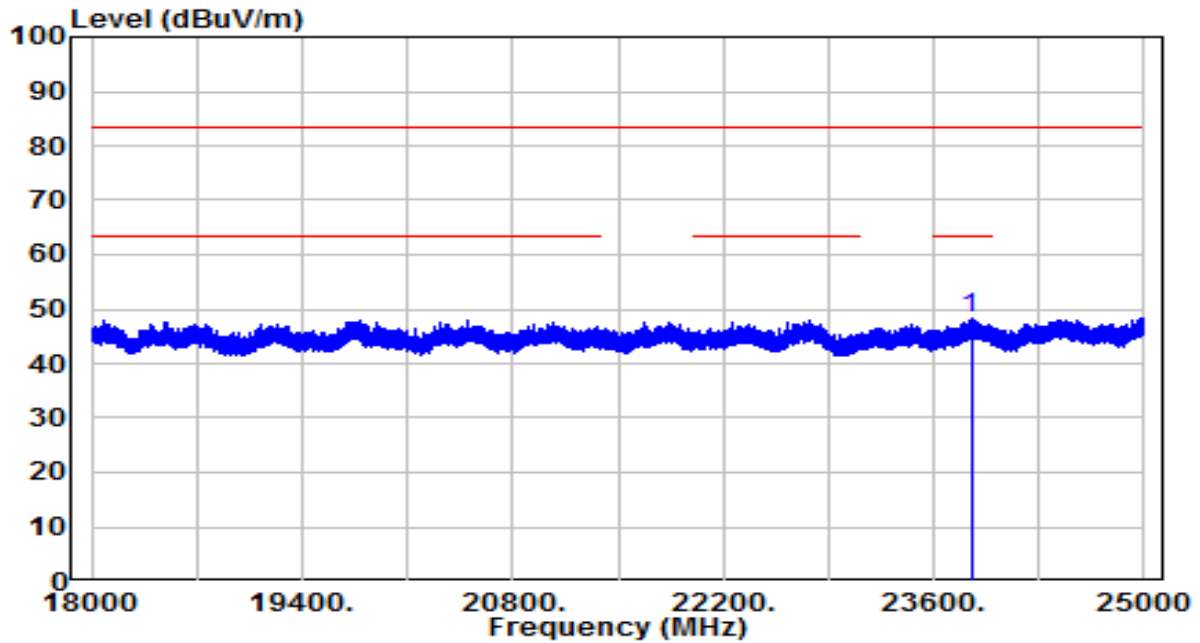


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23847.410	35.82	12.51	48.34	-35.16	83.50	150	298	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Gaming Router	Date of Test	2025-02-10
Factor	BBHA 9170	Temp. / Humidity	19°C /46%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

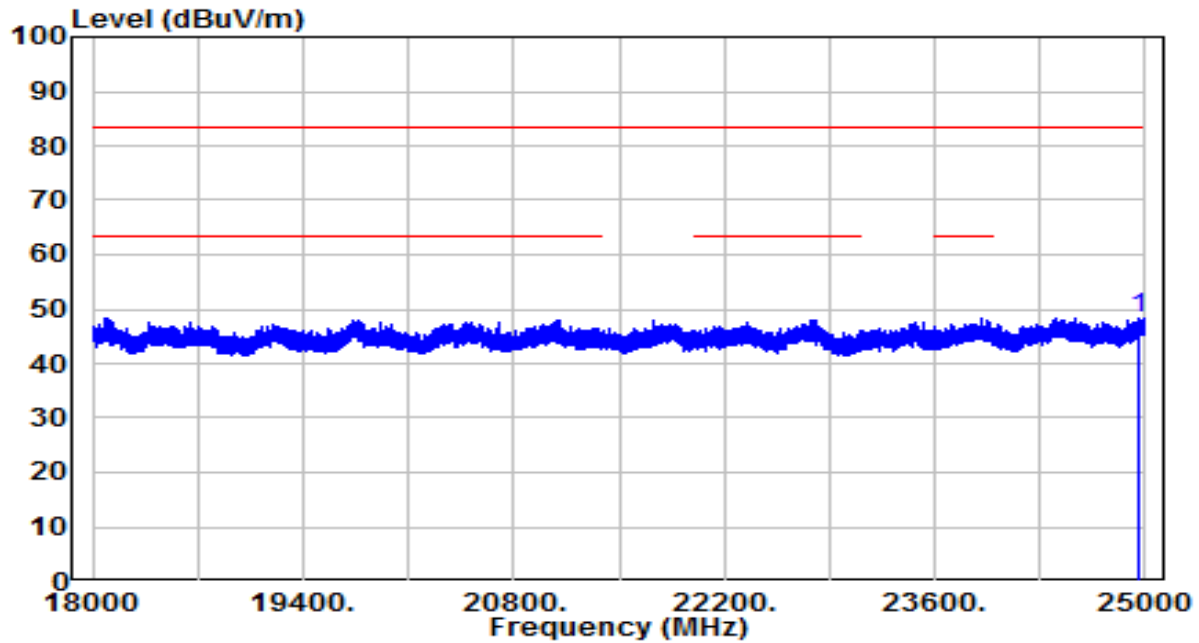

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24954.280	35.29	13.10	48.39	-35.11	83.50	150	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

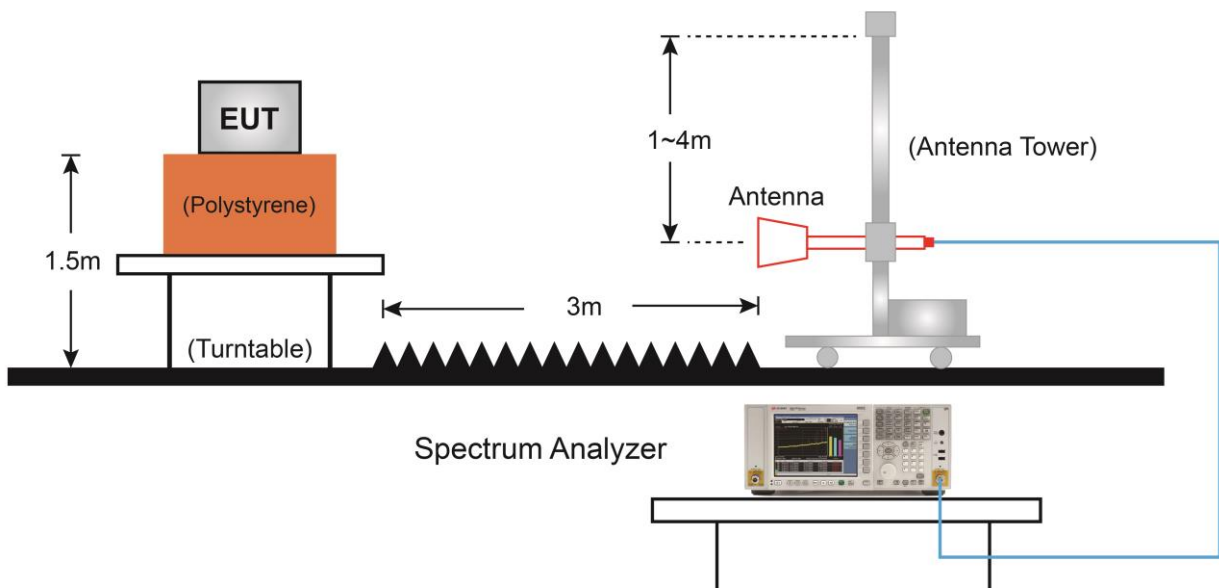7.7.4.Test Setup

7.7.5. Test Result

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

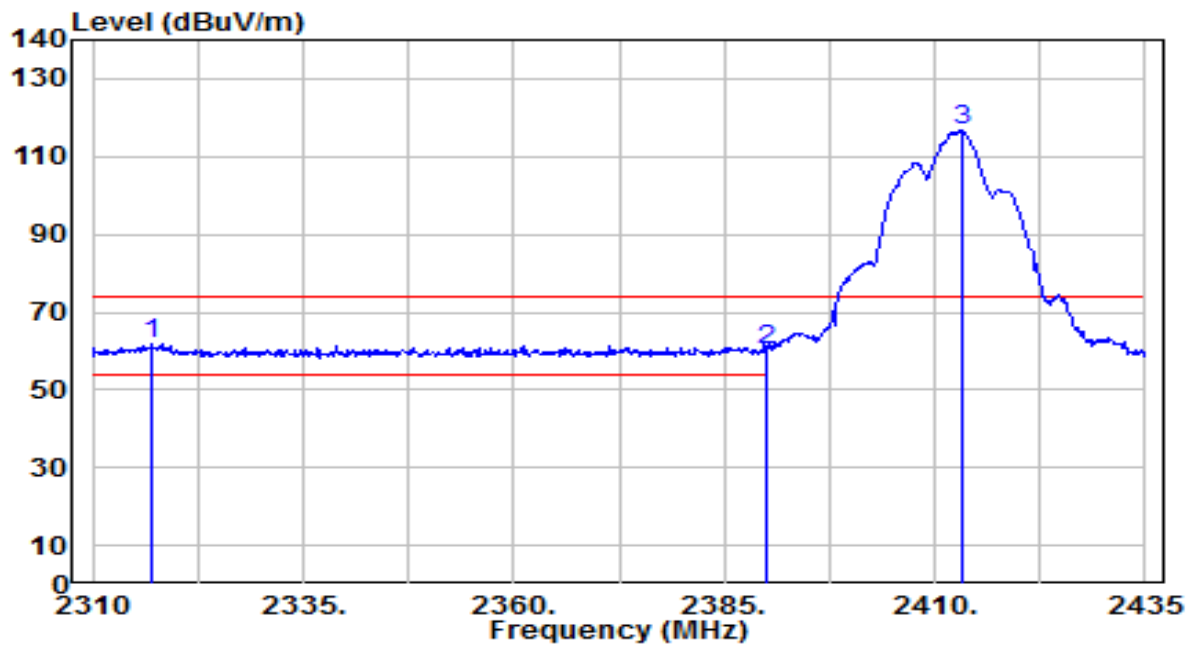


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2317.125	30.01	31.68	61.69	-12.31	74.00	145	130	Peak
2		2390.000	28.27	31.95	60.22	-13.78	74.00	145	130	Peak
3		2413.125	84.48	32.04	116.51	N/A	N/A	145	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

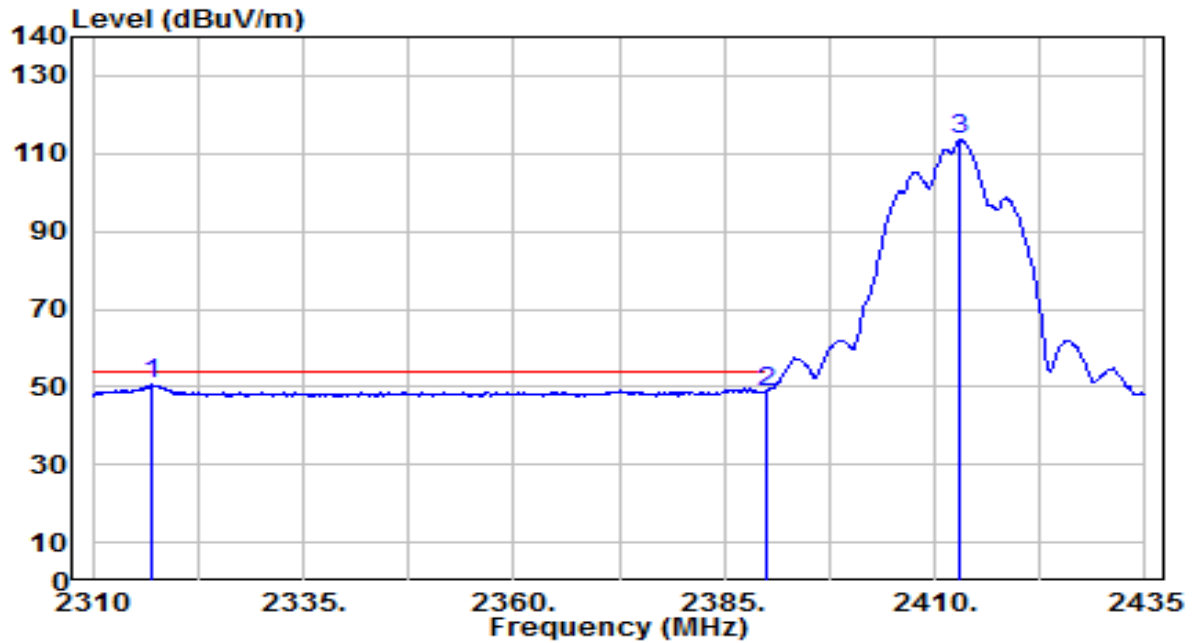


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2317.125	18.86	31.68	50.54	-3.46	54.00	145	130	Average
2		2390.000	16.49	31.95	48.44	-5.56	54.00	145	130	Average
3		2413.000	81.51	32.03	113.55	N/A	N/A	145	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

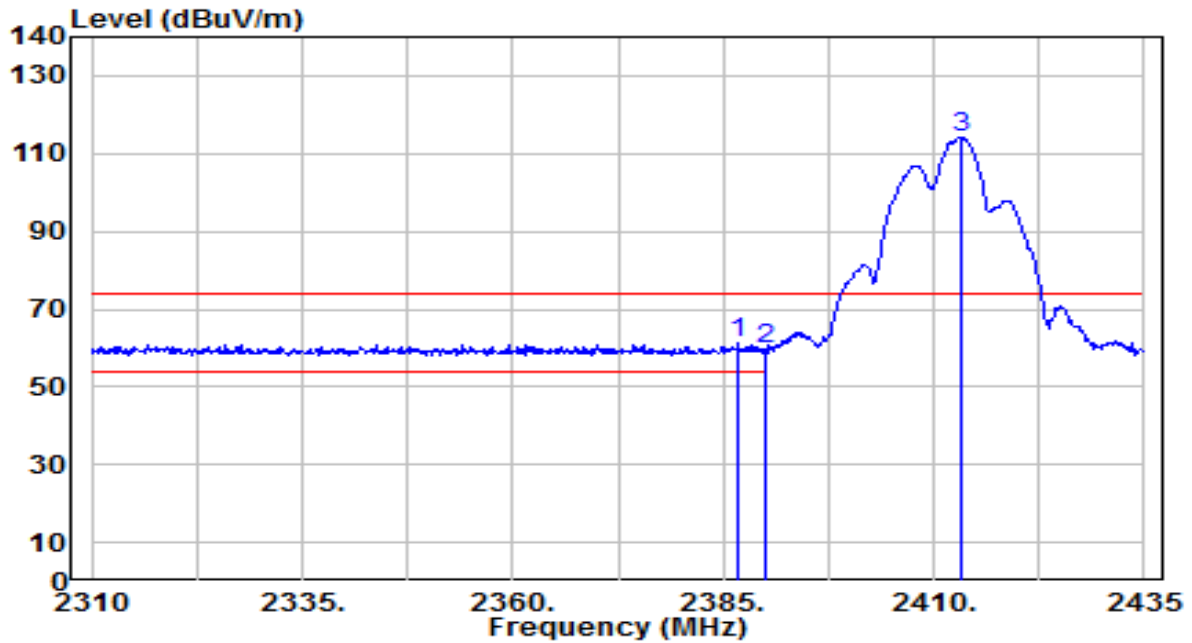


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.875	29.22	31.94	61.15	-12.85	74.00	130	210	Peak
2		2390.000	27.54	31.95	59.48	-14.52	74.00	130	210	Peak
3		2413.125	82.25	32.04	114.29	N/A	N/A	130	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

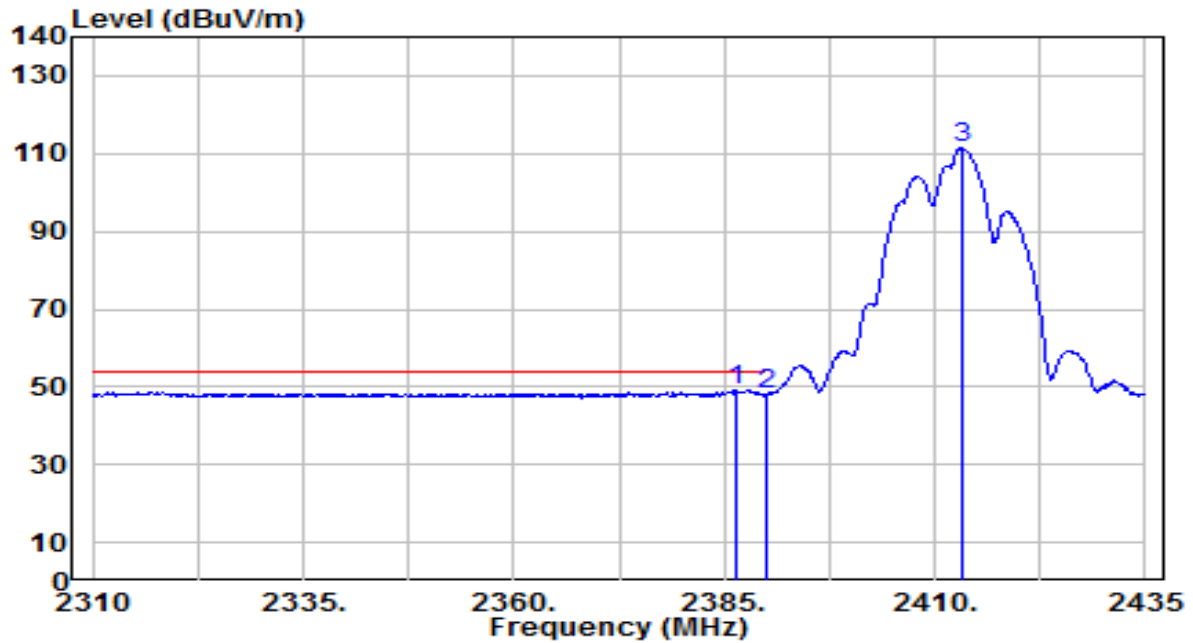


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.375	17.13	31.94	49.07	-4.93	54.00	130	210	Average
2		2390.000	15.95	31.95	47.89	-6.11	54.00	130	210	Average
3		2413.125	79.26	32.04	111.30	N/A	N/A	130	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

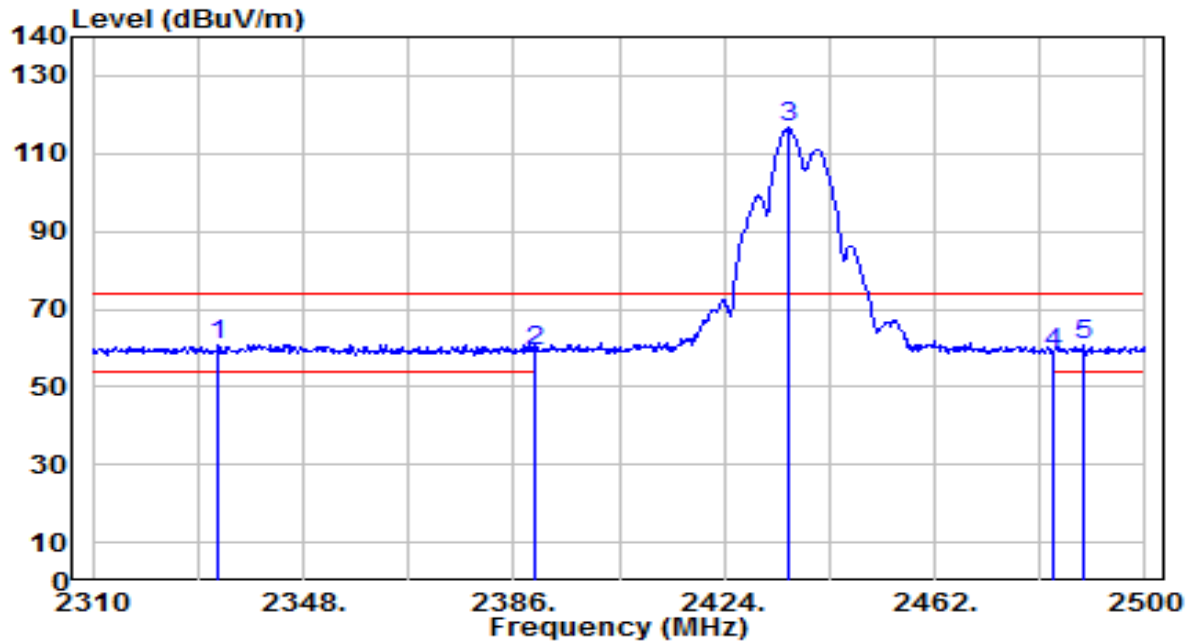


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2332.800	29.00	31.73	60.74	-13.26	74.00	195	215	Peak
2	2390.000	27.00	31.95	58.94	-15.06	74.00	195	215	Peak
3	2435.590	84.42	32.12	116.54	N/A	N/A	195	215	Peak
4	2483.500	26.21	32.30	58.50	-15.50	74.00	195	215	Peak
5	* 2488.790	28.64	32.32	60.96	-13.04	74.00	195	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

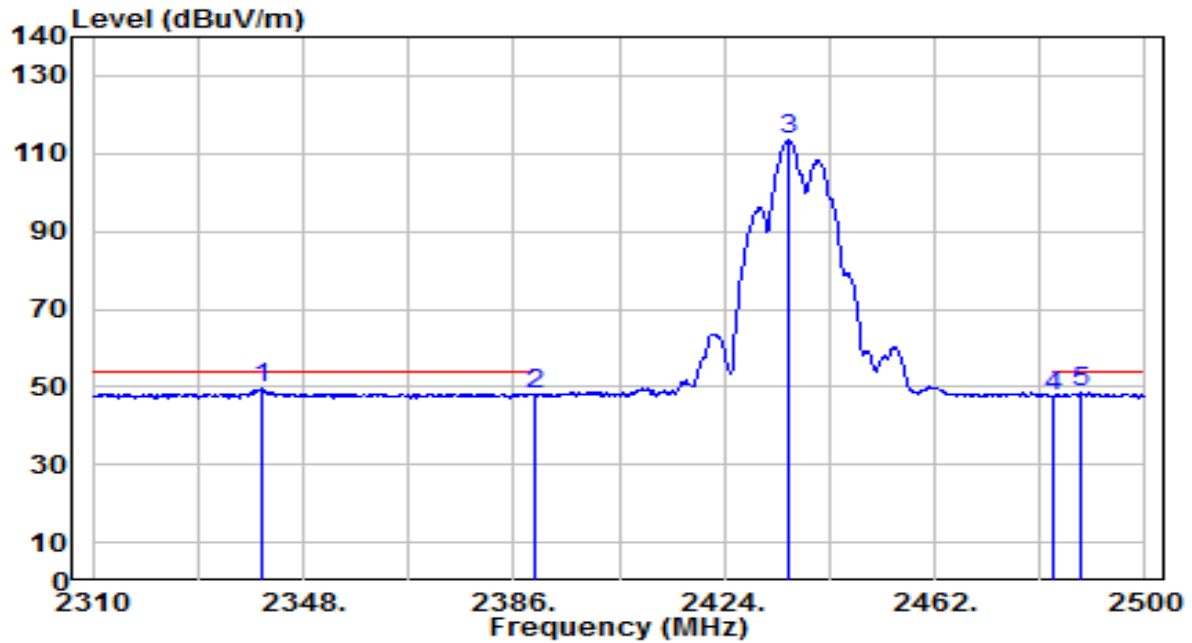


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.400	17.63	31.76	49.40	-4.60	54.00	195	215	Average
2		2390.000	16.15	31.95	48.10	-5.90	54.00	195	215	Average
3		2435.780	81.22	32.12	113.34	N/A	N/A	195	215	Average
4		2483.500	15.36	32.30	47.66	-6.34	54.00	195	215	Average
5		2488.220	16.10	32.32	48.41	-5.59	54.00	195	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

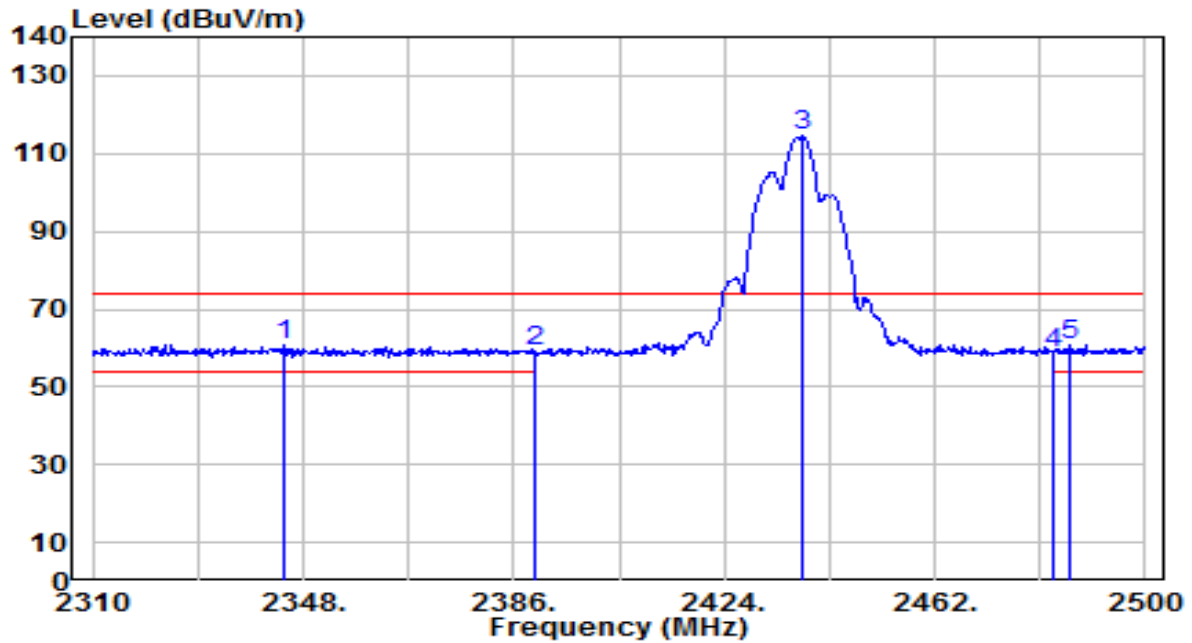


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2344.390	29.16	31.78	60.94	-13.06	74.00	145	210	Peak
2		2390.000	27.28	31.95	59.23	-14.77	74.00	145	210	Peak
3		2438.060	82.44	32.13	114.57	N/A	N/A	145	210	Peak
4		2483.500	26.51	32.30	58.81	-15.19	74.00	145	210	Peak
5		2486.320	28.63	32.31	60.94	-13.06	74.00	145	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

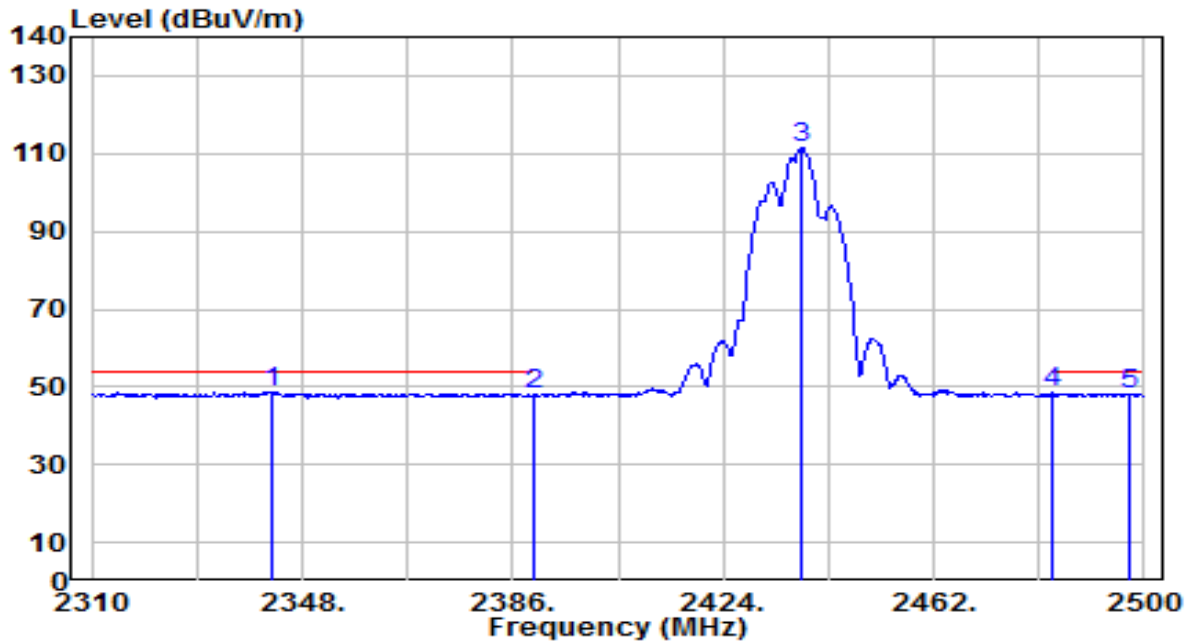


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.490	16.88	31.77	48.66	-5.34	54.00	145	210	Average
2		2390.000	16.08	31.95	48.02	-5.98	54.00	145	210	Average
3		2438.060	79.58	32.13	111.71	N/A	N/A	145	210	Average
4		2483.500	16.15	32.30	48.45	-5.55	54.00	145	210	Average
5		2497.530	15.88	32.35	48.23	-5.77	54.00	145	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

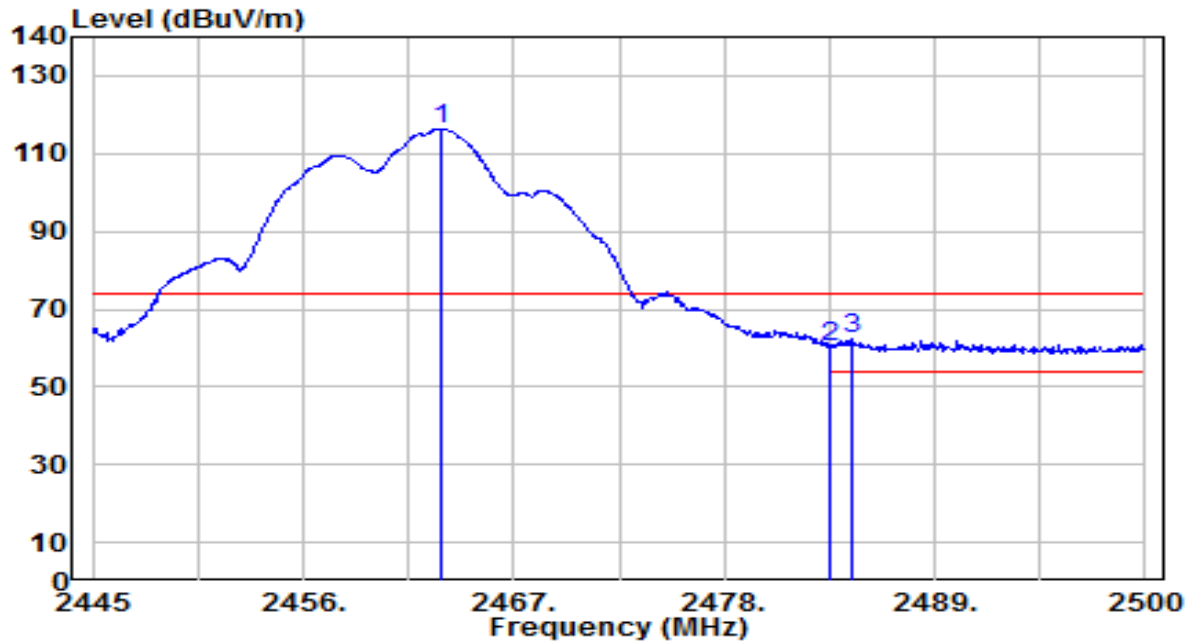


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.150	84.12	32.22	116.34	N/A	N/A	240	220	Peak
2	2483.500	28.17	32.30	60.47	-13.53	74.00	240	220	Peak
3	* 2484.710	29.89	32.30	62.19	-11.81	74.00	240	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

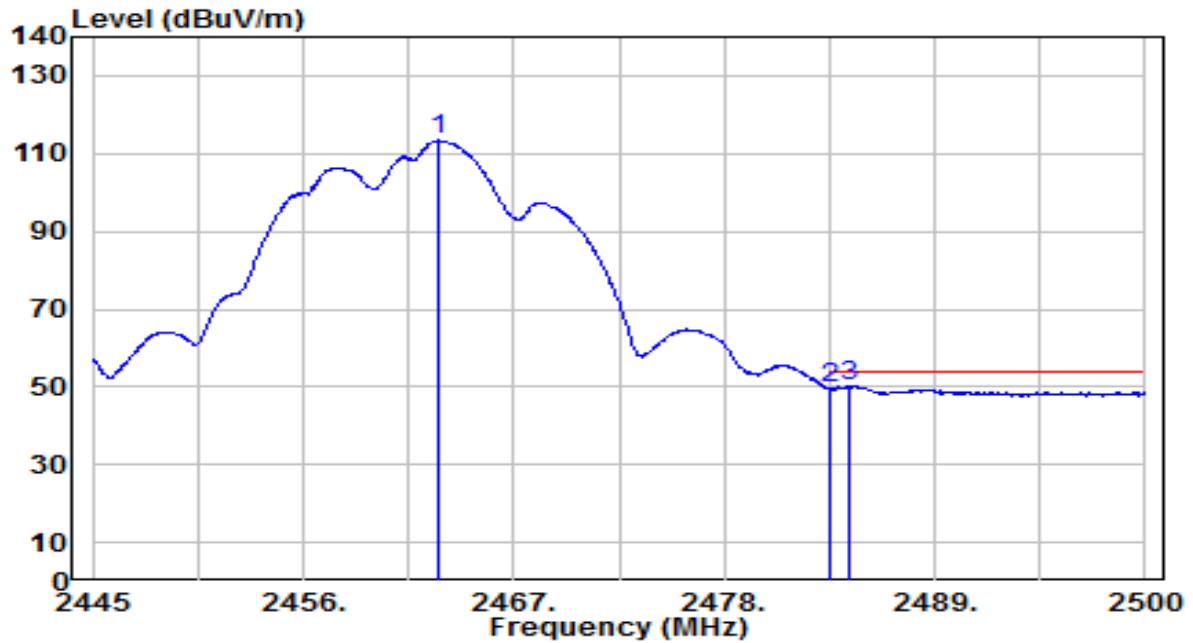


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.095	81.13	32.22	113.35	N/A	N/A	240	220	Average
2	2483.500	17.15	32.30	49.45	-4.55	54.00	240	220	Average
3	* 2484.600	18.05	32.30	50.35	-3.65	54.00	240	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

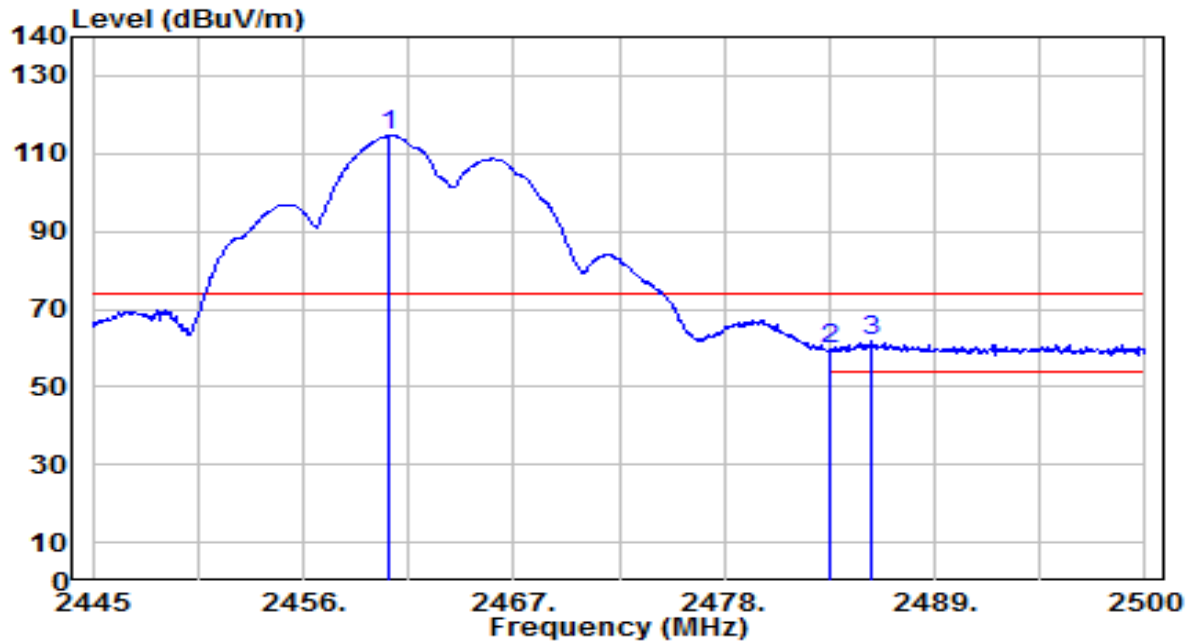


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.510	82.33	32.21	114.54	N/A	N/A	110	210	Peak
2	2483.500	27.25	32.30	59.54	-14.46	74.00	110	210	Peak
3	* 2485.755	29.48	32.31	61.79	-12.21	74.00	110	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

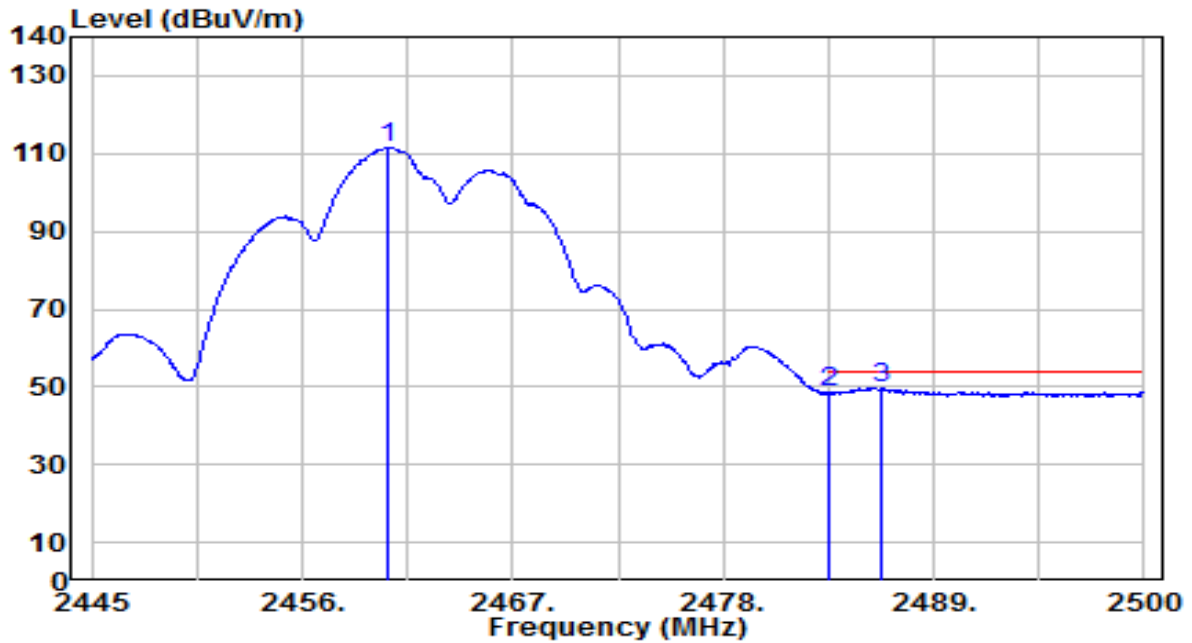


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.510	79.16	32.21	111.37	N/A	N/A	110	210	Average
2	2483.500	16.18	32.30	48.48	-5.52	54.00	110	210	Average
3	* 2486.250	17.51	32.31	49.82	-4.18	54.00	110	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

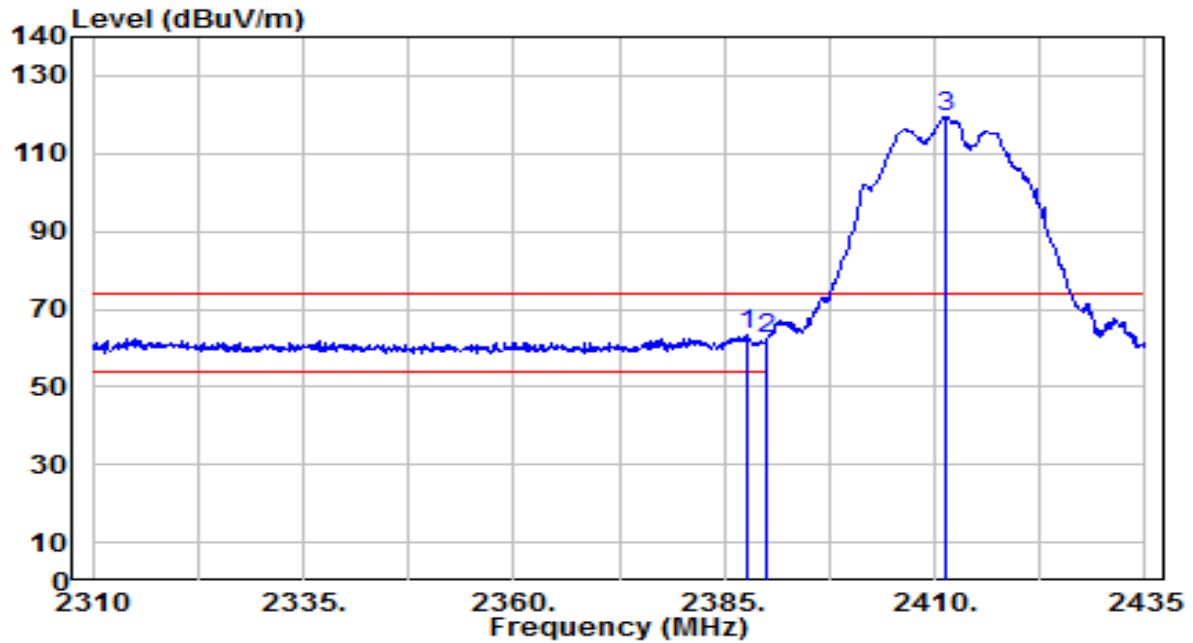


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.625	31.66	31.94	63.60	-10.40	74.00	150	135	Peak
2		2390.000	30.49	31.95	62.44	-11.56	74.00	150	135	Peak
3		2411.250	87.61	32.03	119.63	N/A	N/A	150	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

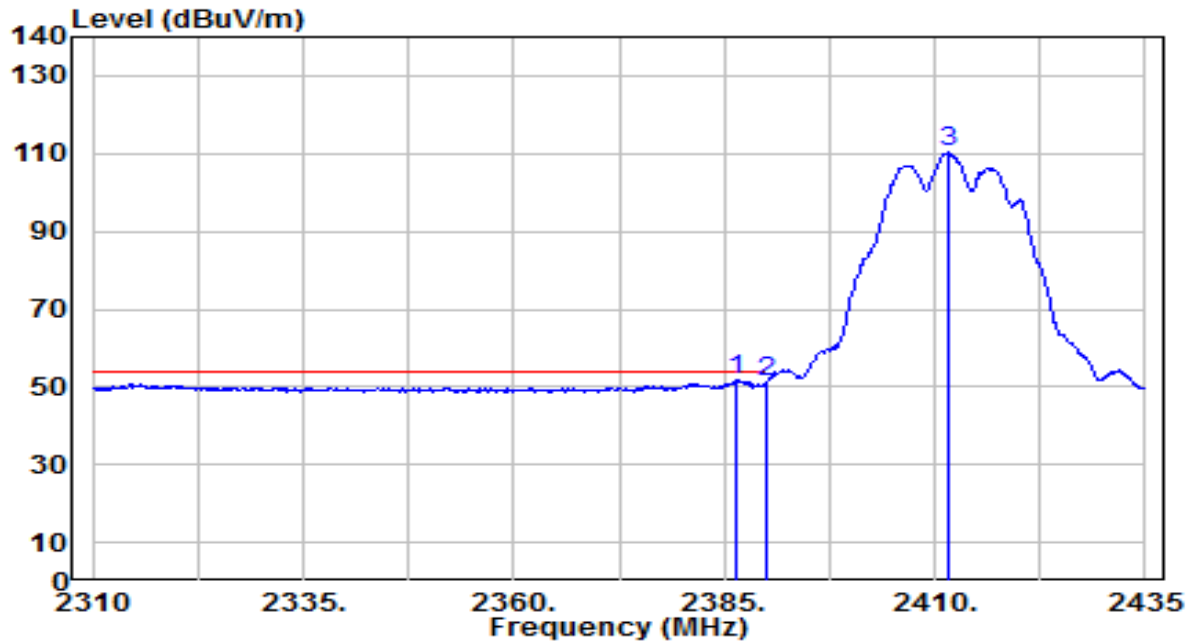


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.500	19.67	31.94	51.60	-2.40	54.00	150	135	Average
2		2390.000	19.23	31.95	51.18	-2.82	54.00	150	135	Average
3		2411.750	78.41	32.03	110.44	N/A	N/A	150	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

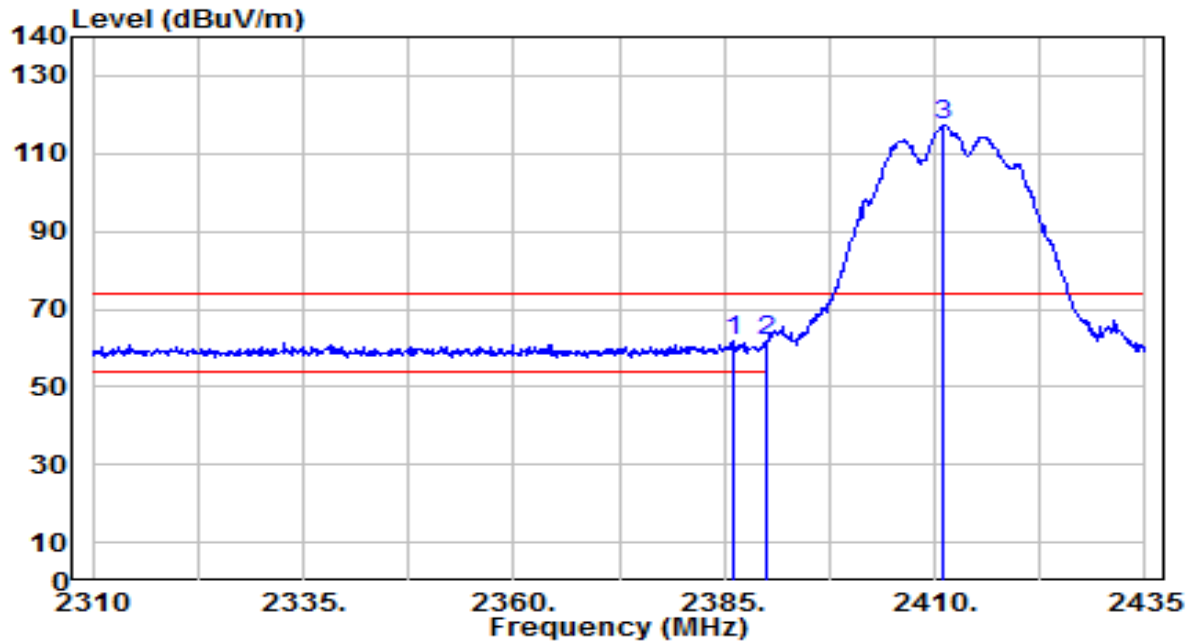


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	29.68	31.93	61.61	-12.39	74.00	130	210	Peak
2	* 2390.000	30.11	31.95	62.06	-11.94	74.00	130	210	Peak
3	2411.000	85.13	32.03	117.16	N/A	N/A	130	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

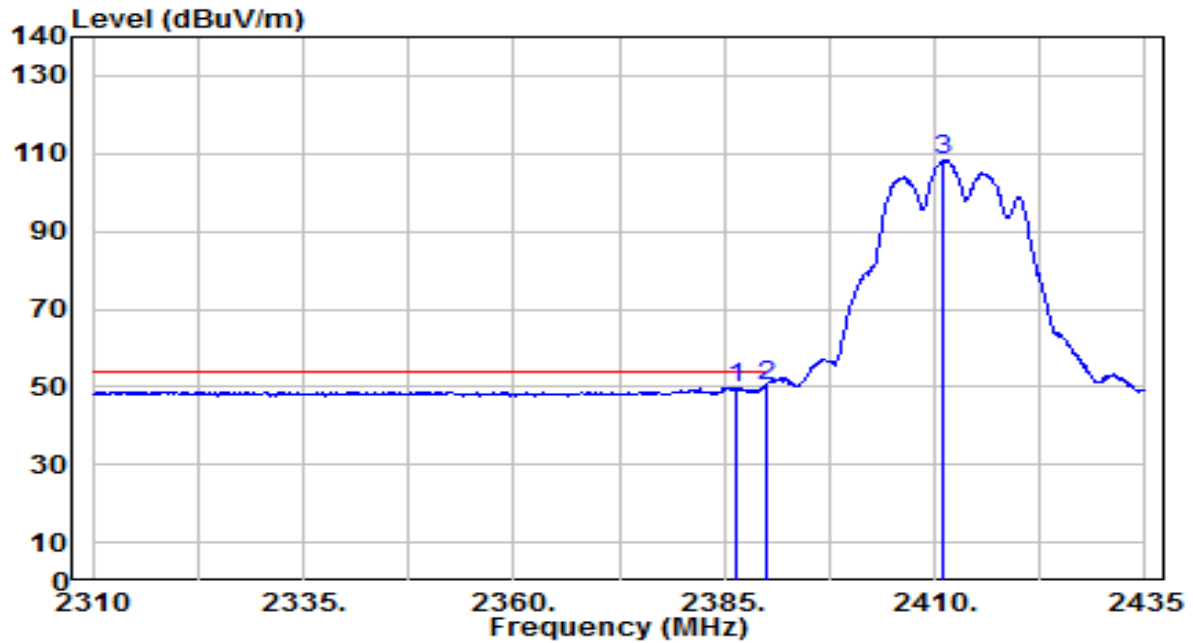


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.375	17.91	31.94	49.84	-4.16	54.00	130	210	Average
2	*	2390.000	18.40	31.95	50.35	-3.65	54.00	130	210	Average
3		2411.000	76.52	32.03	108.55	N/A	N/A	130	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

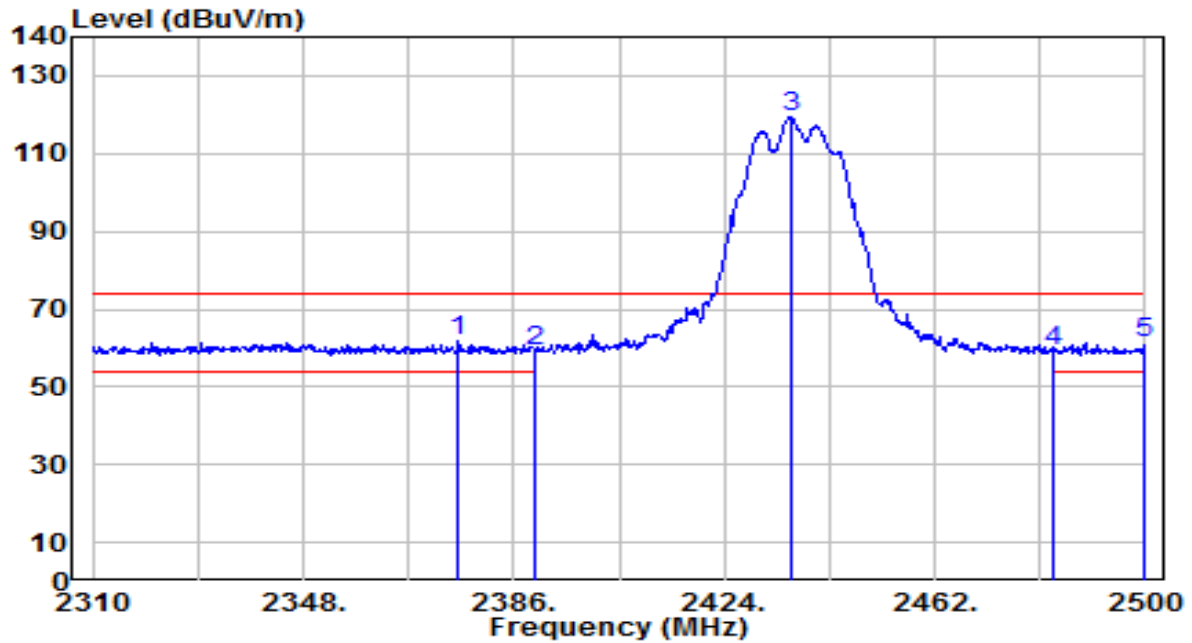


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2376.120	29.86	31.90	61.76	-12.24	74.00	195	215	Peak
2		2390.000	27.01	31.95	58.96	-15.04	74.00	195	215	Peak
3		2435.970	87.48	32.12	119.60	N/A	N/A	195	215	Peak
4		2483.500	27.05	32.30	59.35	-14.65	74.00	195	215	Peak
5		2500.000	28.68	32.36	61.04	-12.96	74.00	195	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

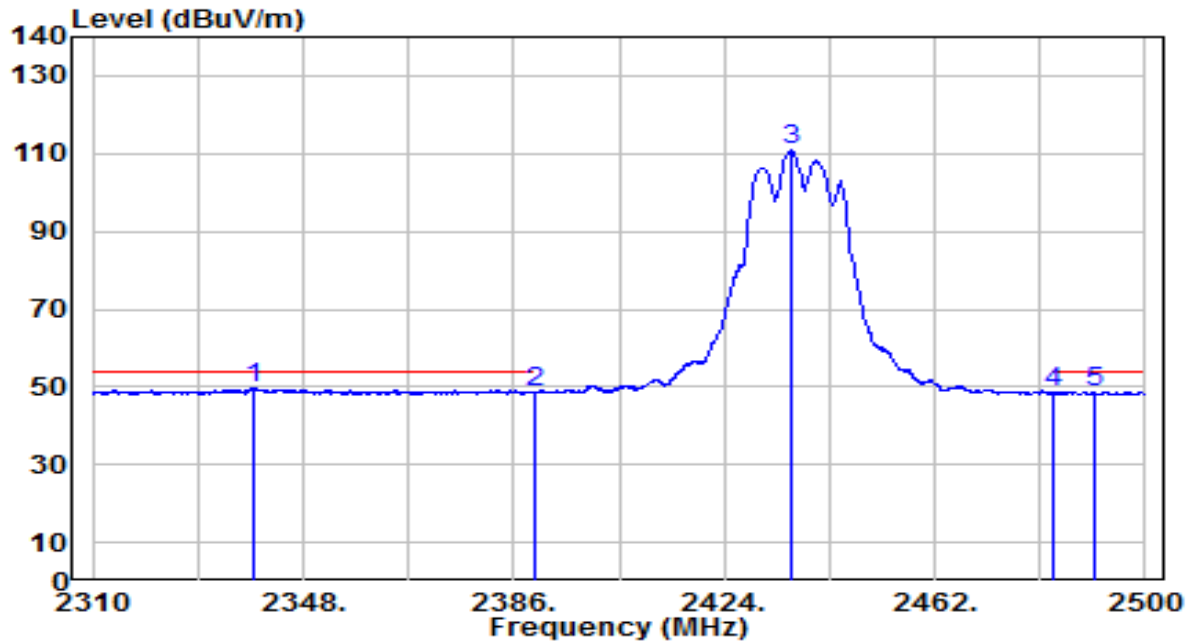


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.070	17.83	31.76	49.59	-4.41	54.00	195	215	Average
2		2390.000	16.79	31.95	48.73	-5.27	54.00	195	215	Average
3		2436.160	78.67	32.12	110.79	N/A	N/A	195	215	Average
4		2483.500	16.16	32.30	48.45	-5.55	54.00	195	215	Average
5		2490.690	16.46	32.33	48.78	-5.22	54.00	195	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

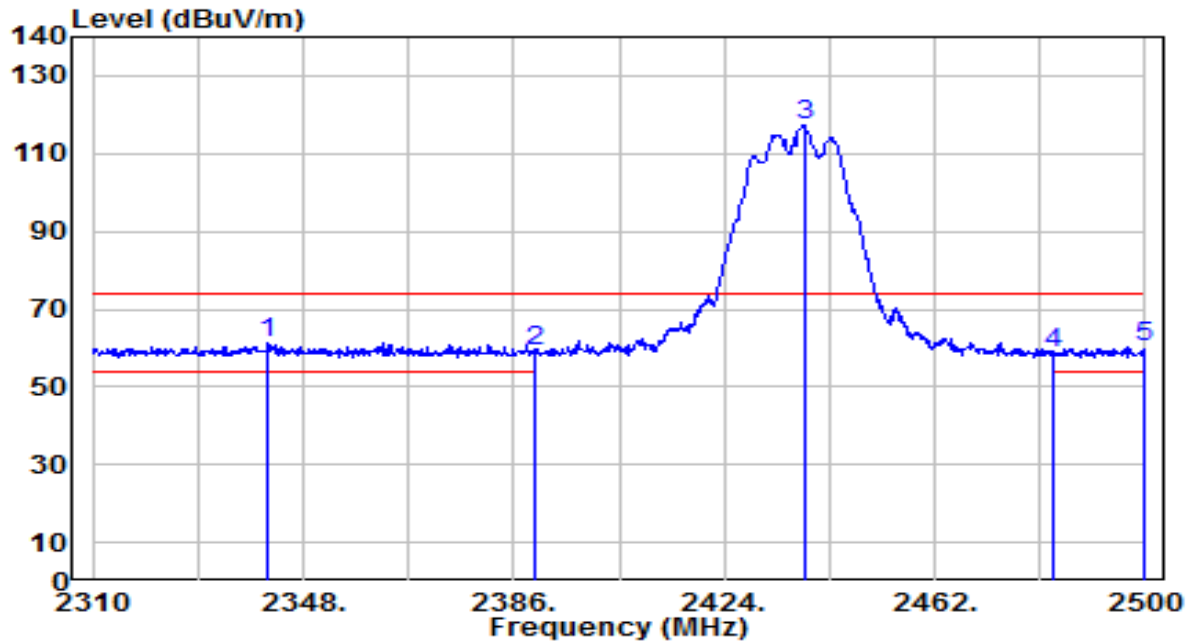


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.540	29.38	31.77	61.15	-12.85	74.00	115	210	Peak
2		2390.000	27.35	31.95	59.30	-14.70	74.00	115	210	Peak
3		2438.440	85.22	32.13	117.35	N/A	N/A	115	210	Peak
4		2483.500	26.58	32.30	58.88	-15.12	74.00	115	210	Peak
5		2500.000	27.88	32.36	60.24	-13.76	74.00	115	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

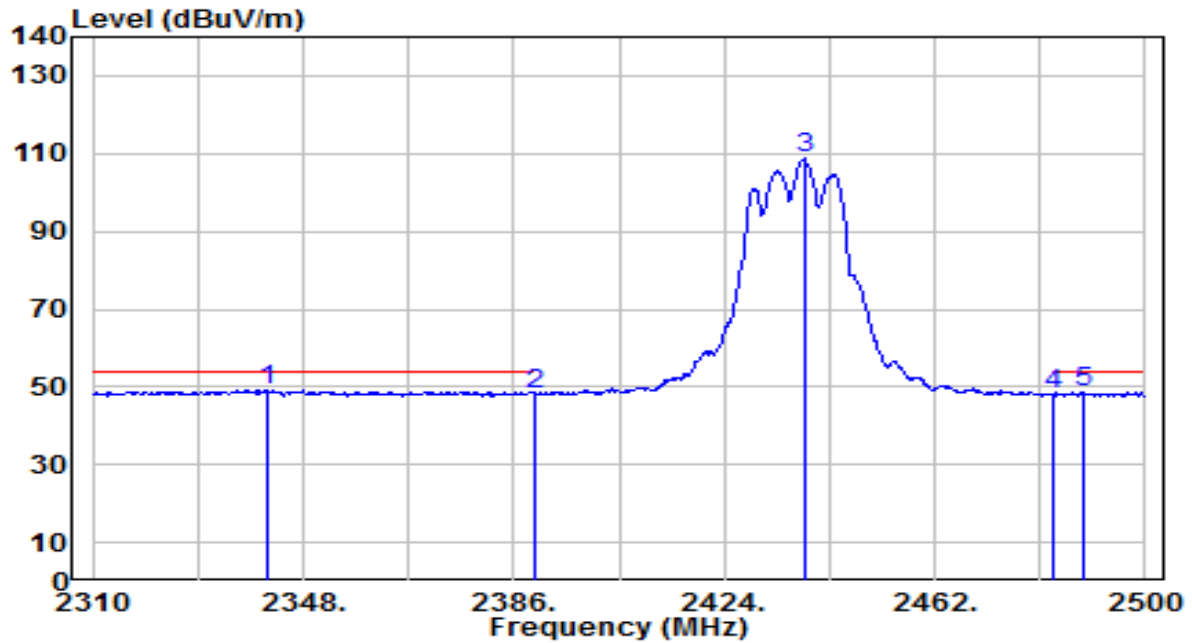


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.730	17.44	31.77	49.21	-4.79	54.00	115	210	Average
2		2390.000	16.10	31.95	48.05	-5.95	54.00	115	210	Average
3		2438.440	76.55	32.13	108.68	N/A	N/A	115	210	Average
4		2483.500	15.77	32.30	48.07	-5.93	54.00	115	210	Average
5		2488.980	16.34	32.32	48.66	-5.34	54.00	115	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

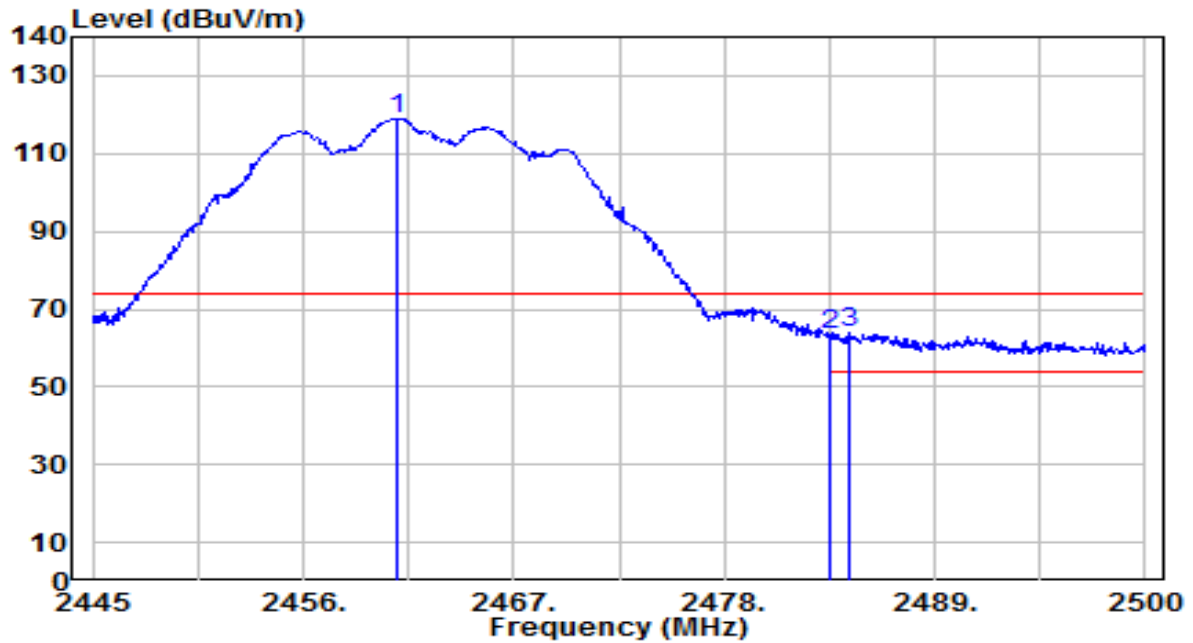


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.950	86.92	32.21	119.13	N/A	N/A	190	215	Peak
2	2483.500	31.02	32.30	63.32	-10.68	74.00	190	215	Peak
3	* 2484.600	31.54	32.30	63.84	-10.16	74.00	190	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

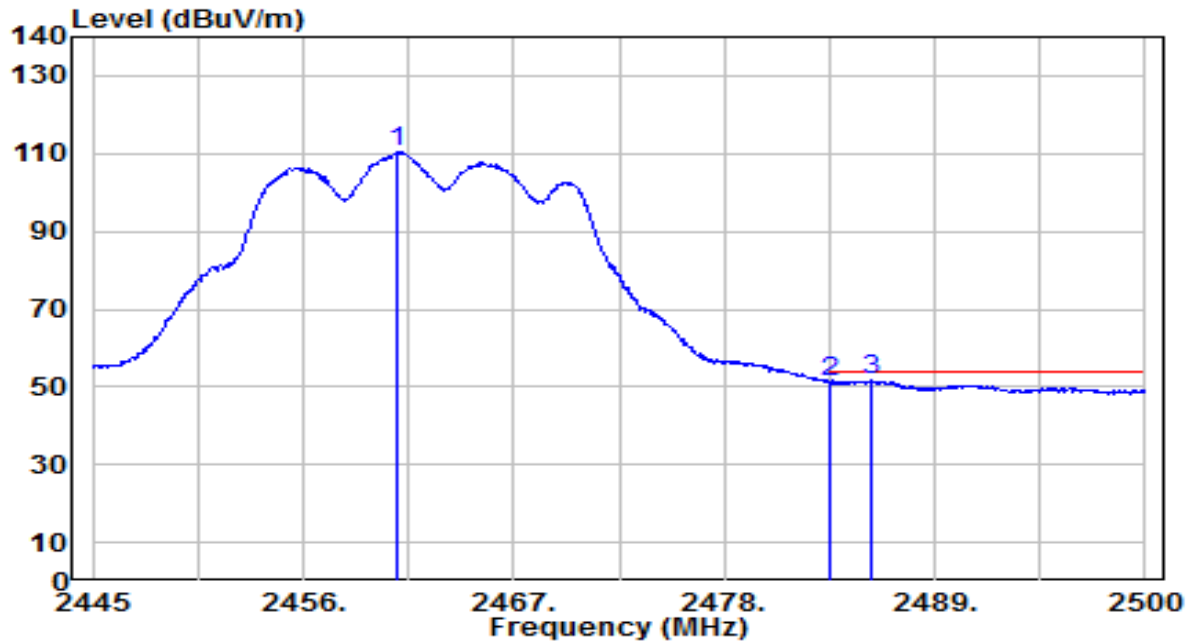


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.895	78.07	32.21	110.29	N/A	N/A	190	215	Average
2	2483.500	18.79	32.30	51.09	-2.91	54.00	190	215	Average
3	* 2485.700	19.24	32.31	51.55	-2.45	54.00	190	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

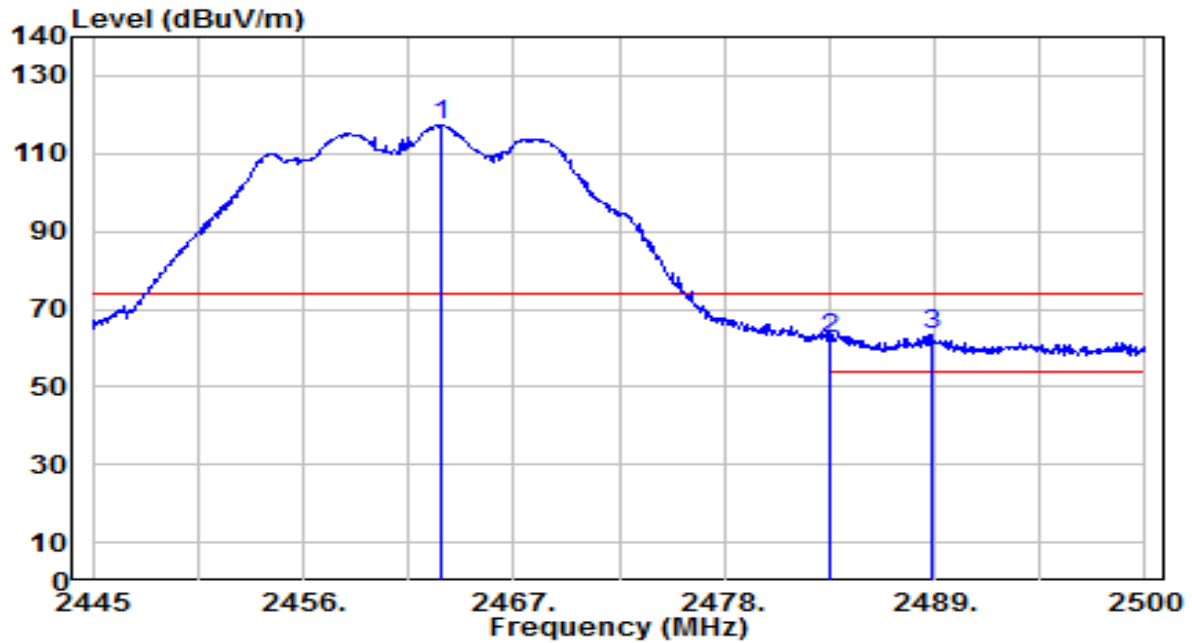


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.260	85.15	32.22	117.37	N/A	N/A	105	210	Peak
2	2483.500	30.12	32.30	62.42	-11.58	74.00	105	210	Peak
3	* 2488.835	31.18	32.32	63.50	-10.50	74.00	105	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

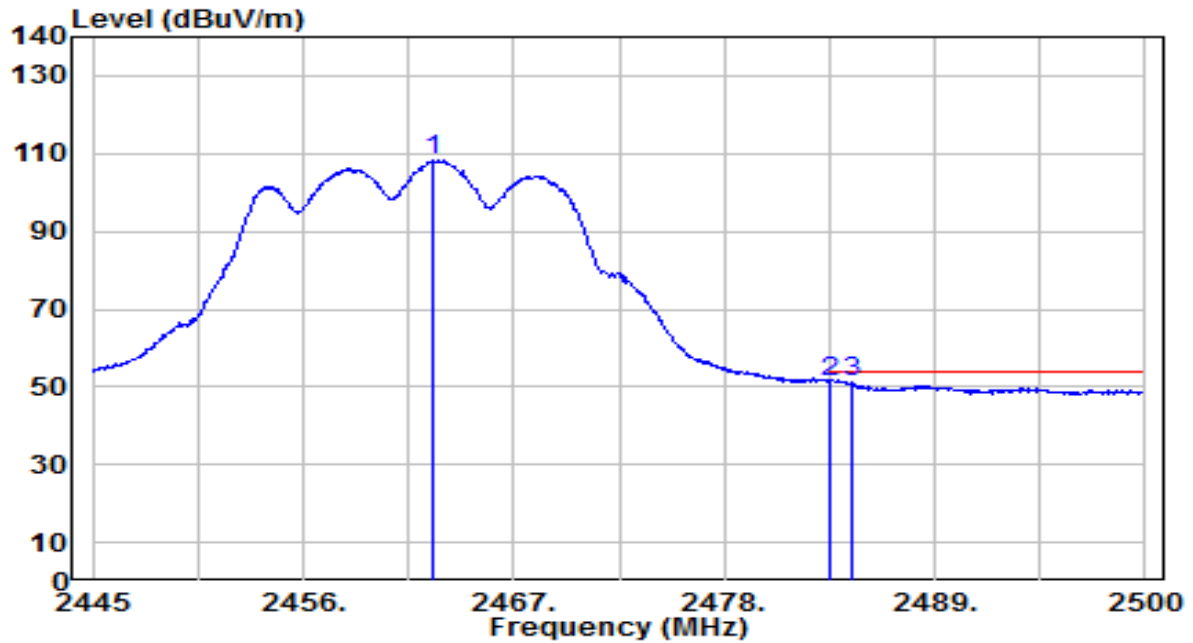


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.765	76.26	32.22	108.48	N/A	N/A	105	210	Average
2	*	2483.500	19.15	32.30	51.45	-2.55	54.00	105	210	Average
3		2484.655	18.70	32.30	51.00	-3.00	54.00	105	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

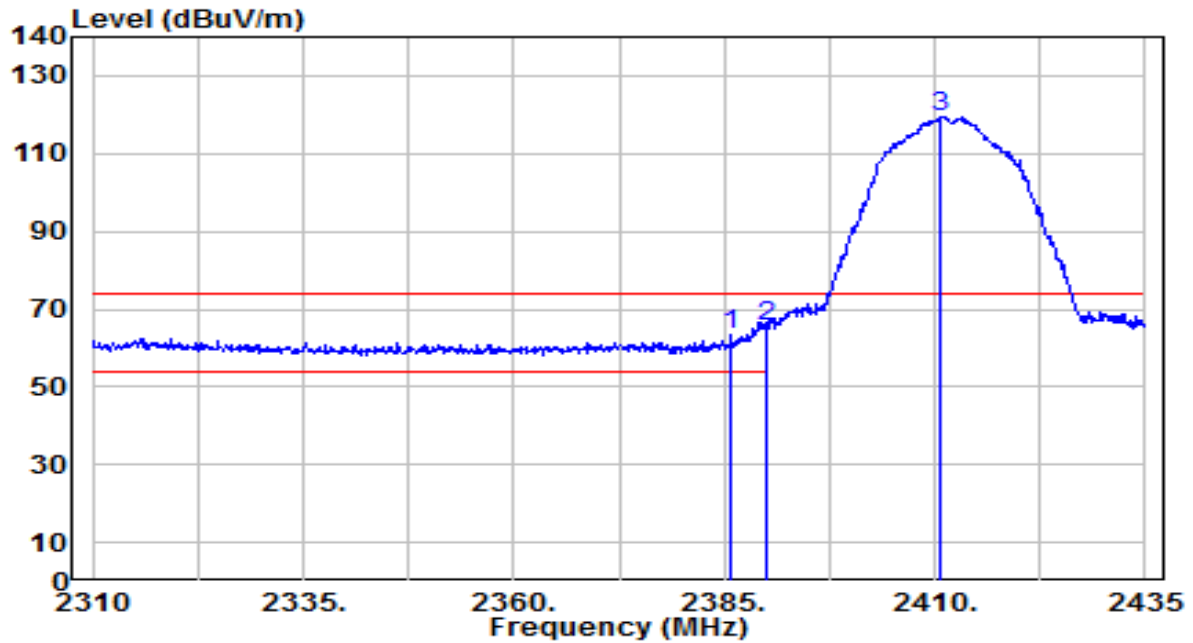


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.875	31.64	31.93	63.57	-10.43	74.00	235	140	Peak
2	*	2390.000	33.78	31.95	65.73	-8.27	74.00	235	140	Peak
3		2410.625	87.49	32.03	119.52	N/A	N/A	235	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

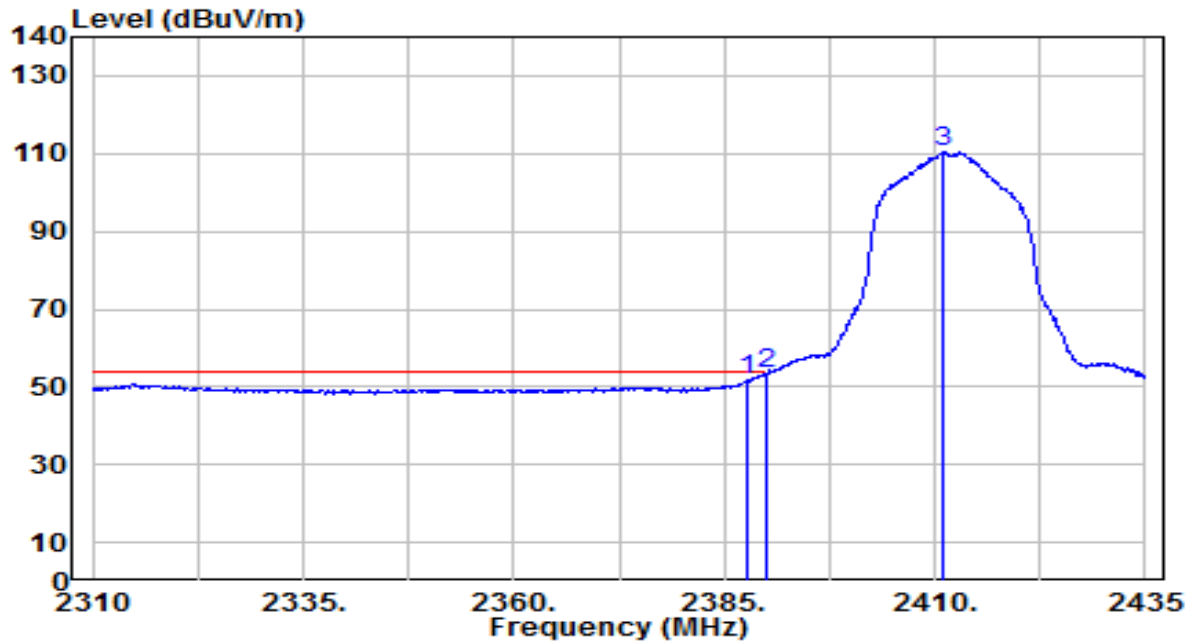


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.875	19.62	31.94	51.56	-2.44	54.00	235	140	Average
2	*	2390.000	21.23	31.95	53.18	-0.82	54.00	235	140	Average
3		2411.125	78.46	32.03	110.49	N/A	N/A	235	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

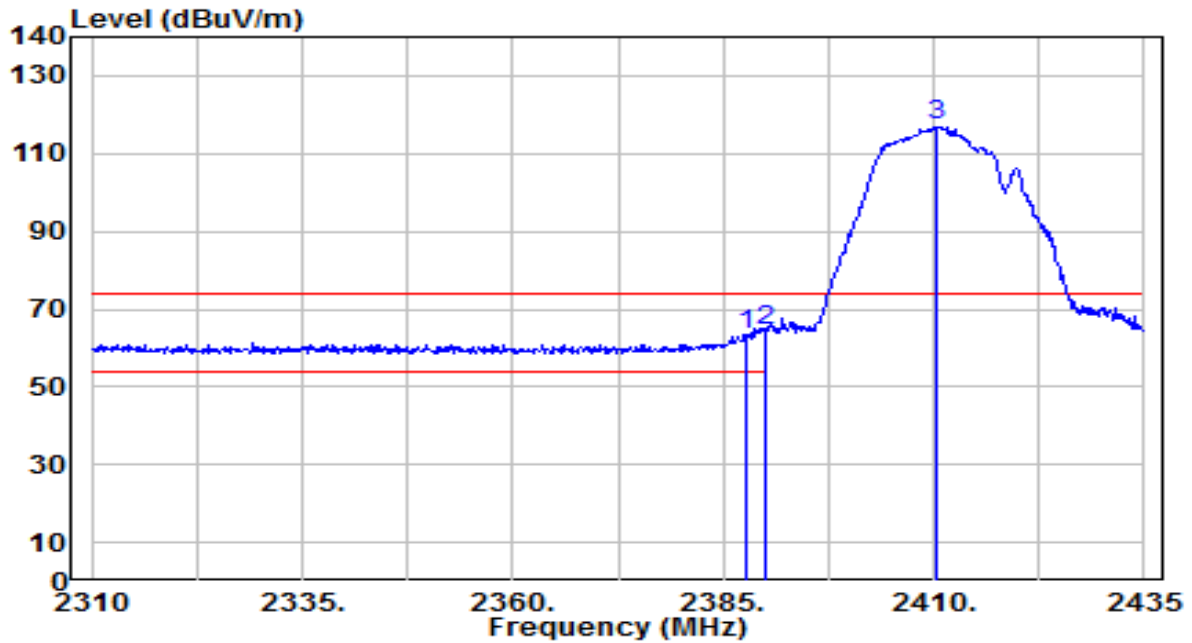


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.875	31.54	31.94	63.48	-10.52	74.00	130	210	Peak
2	*	2390.000	32.68	31.95	64.63	-9.37	74.00	130	210	Peak
3		2410.375	85.17	32.02	117.20	N/A	N/A	130	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

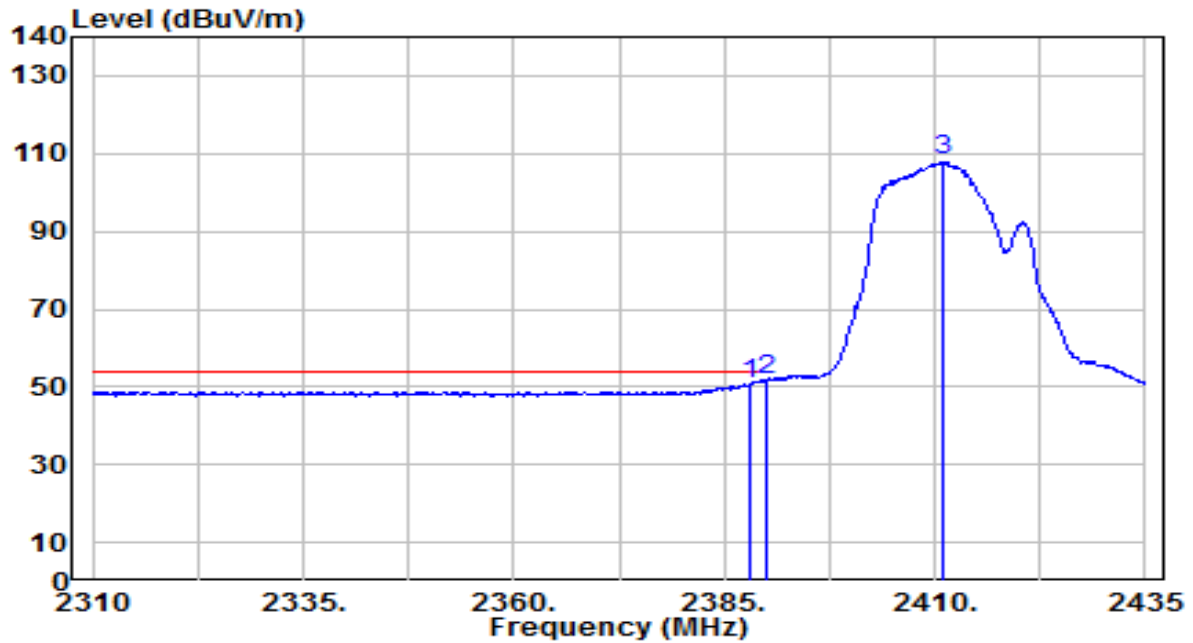


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	18.59	31.94	50.54	-3.46	54.00	130	210	Average
2	*	2390.000	19.77	31.95	51.72	-2.28	54.00	130	210	Average
3		2411.125	76.18	32.03	108.21	N/A	N/A	130	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

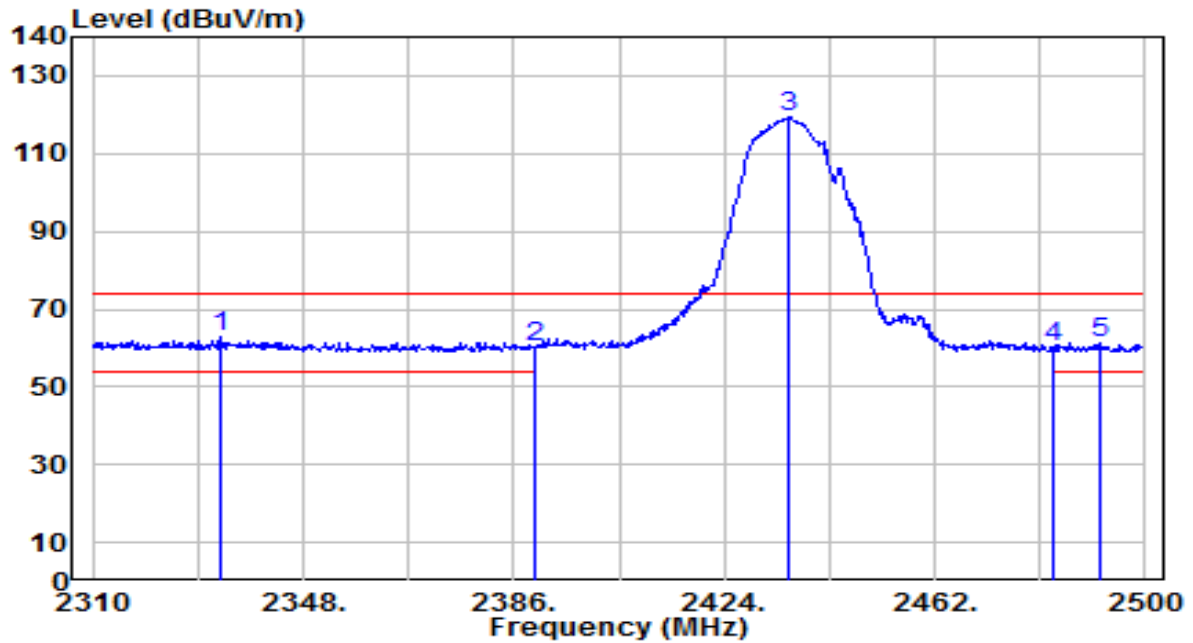


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2332.990	30.91	31.74	62.65	-11.35	74.00	270	215	Peak
2		2390.000	28.18	31.95	60.13	-13.87	74.00	270	215	Peak
3		2435.590	87.36	32.12	119.47	N/A	N/A	270	215	Peak
4		2483.500	27.71	32.30	60.00	-14.00	74.00	270	215	Peak
5		2492.020	28.94	32.33	61.27	-12.73	74.00	270	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

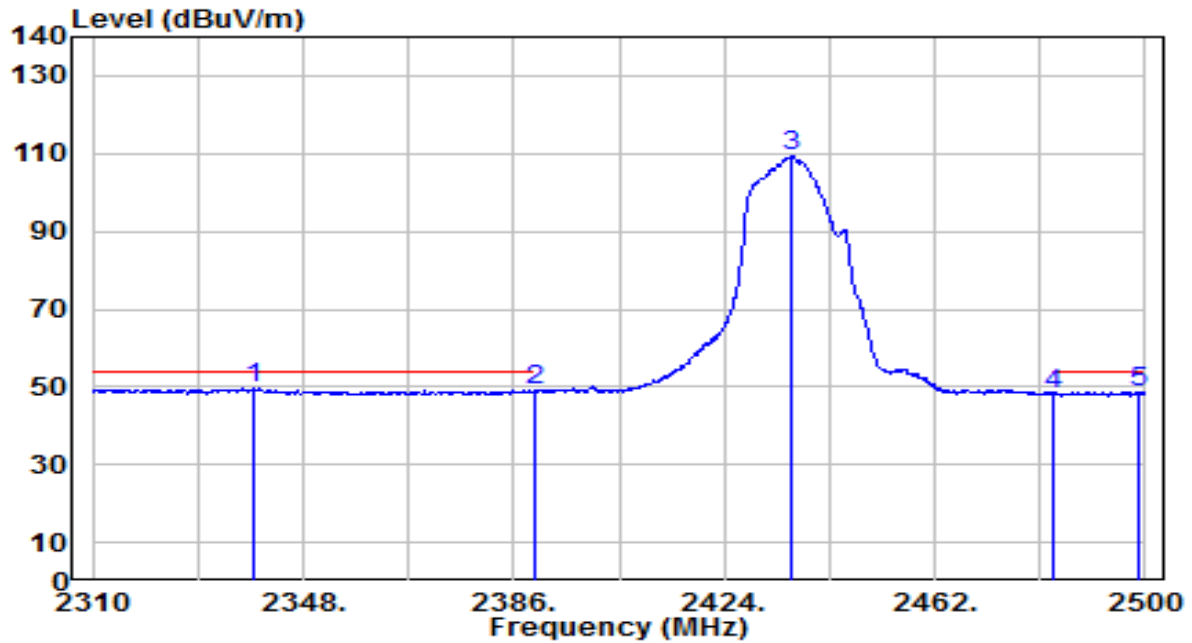


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2338.880	17.77	31.76	49.53	-4.47	54.00	270	215	Average
2		2390.000	16.97	31.95	48.92	-5.08	54.00	270	215	Average
3		2435.970	77.11	32.12	109.23	N/A	N/A	270	215	Average
4		2483.500	15.74	32.30	48.04	-5.96	54.00	270	215	Average
5		2498.860	16.16	32.36	48.51	-5.49	54.00	270	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

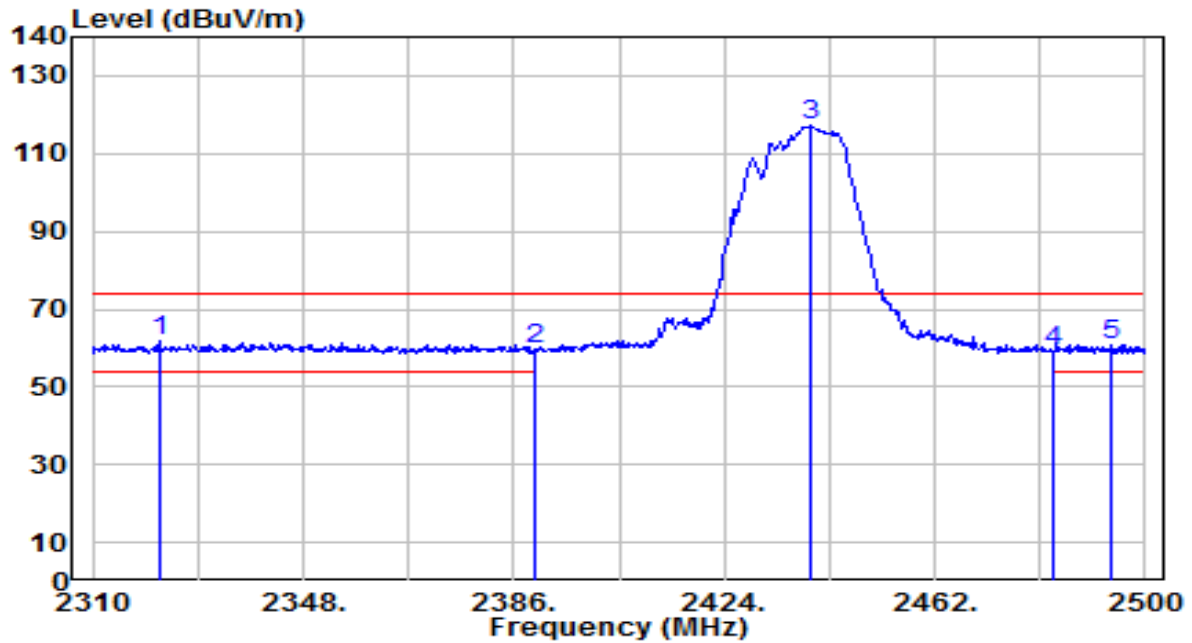


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2321.970	29.92	31.69	61.61	-12.39	74.00	115	210	Peak
2		2390.000	27.55	31.95	59.50	-14.50	74.00	115	210	Peak
3		2439.770	85.00	32.13	117.14	N/A	N/A	115	210	Peak
4		2483.500	27.07	32.30	59.36	-14.64	74.00	115	210	Peak
5		2493.730	28.67	32.34	61.00	-13.00	74.00	115	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

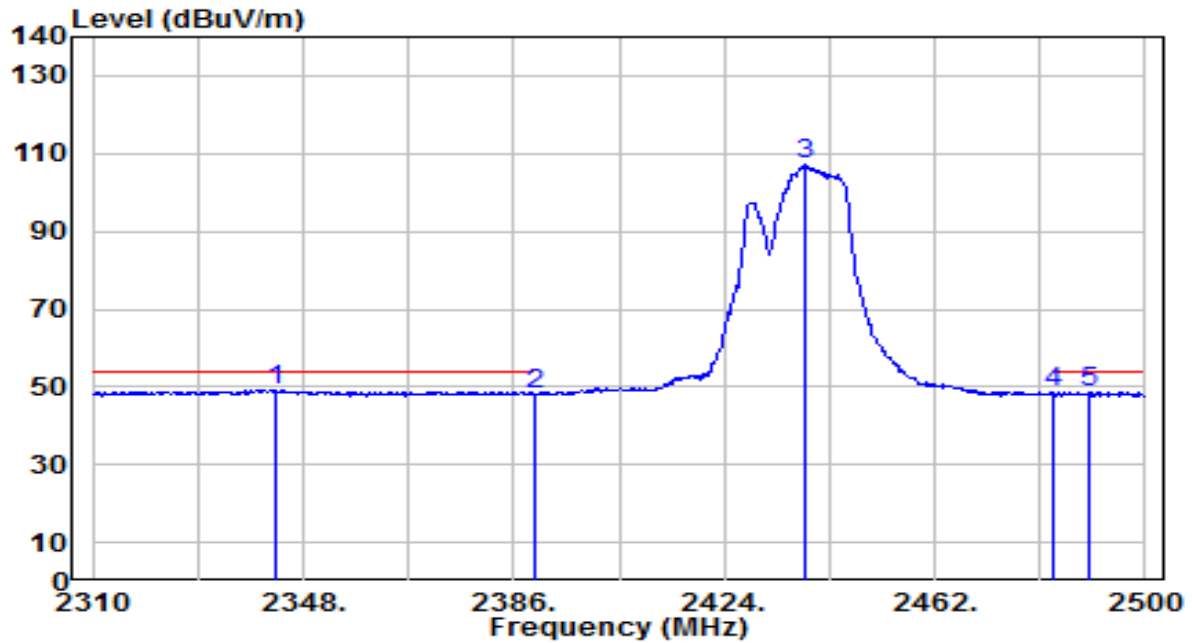


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.870	17.51	31.77	49.28	-4.72	54.00	115	210	Average
2		2390.000	16.05	31.95	48.00	-6.00	54.00	115	210	Average
3		2438.440	74.88	32.13	107.01	N/A	N/A	115	210	Average
4		2483.500	16.07	32.30	48.37	-5.63	54.00	115	210	Average
5		2489.740	16.24	32.32	48.57	-5.43	54.00	115	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

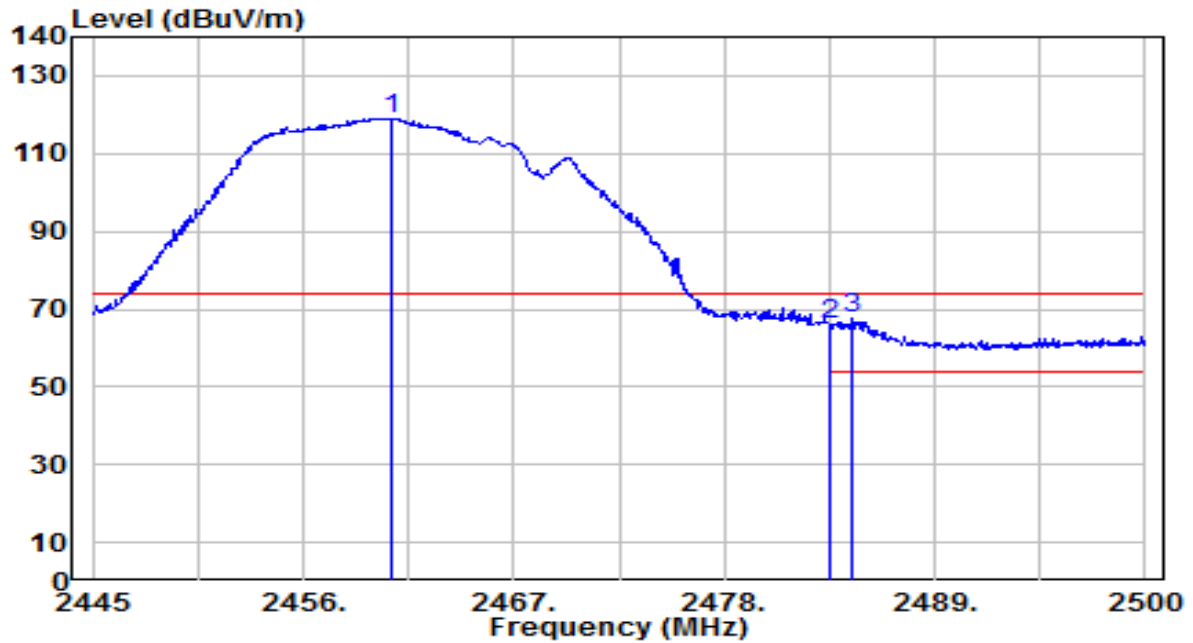


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.565	86.92	32.21	119.13	N/A	N/A	240	215	Peak
2	2483.500	33.89	32.30	66.19	-7.81	74.00	240	215	Peak
3	* 2484.710	35.38	32.30	67.68	-6.32	74.00	240	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

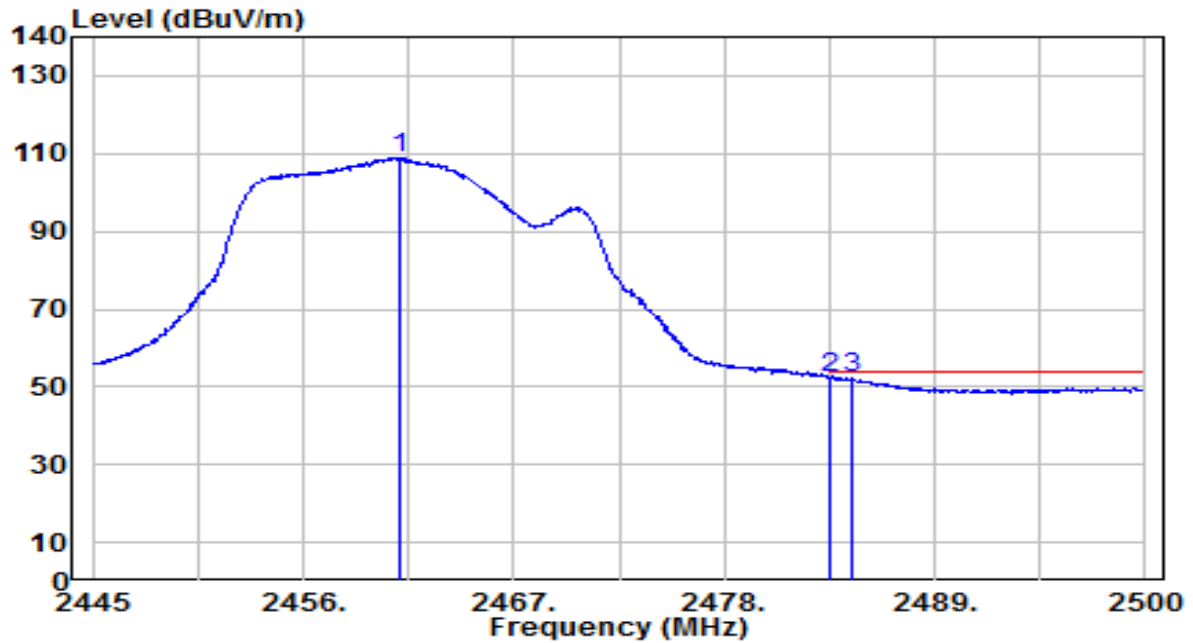


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.005	76.86	32.21	109.07	N/A	N/A	240	215	Average
2	*	2483.500	19.94	32.30	52.24	-1.76	54.00	240	215	Average
3		2484.655	19.83	32.30	52.13	-1.87	54.00	240	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

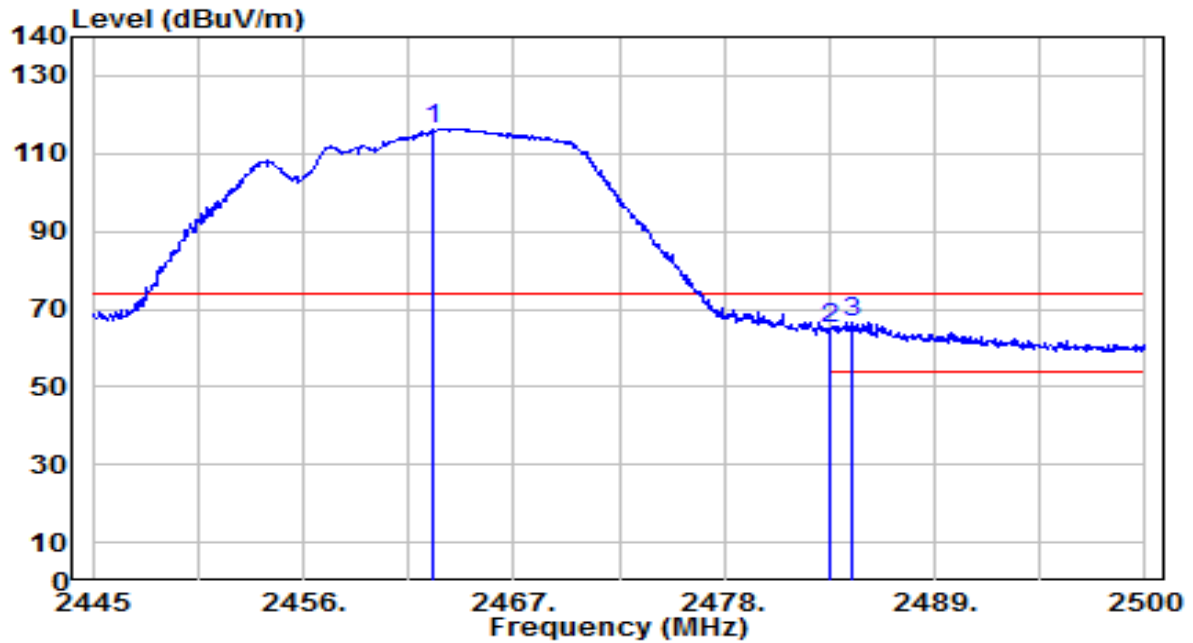


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.820	84.19	32.22	116.42	N/A	N/A	105	210	Peak
2	2483.500	32.49	32.30	64.79	-9.21	74.00	105	210	Peak
3	* 2484.710	34.26	32.30	66.56	-7.44	74.00	105	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

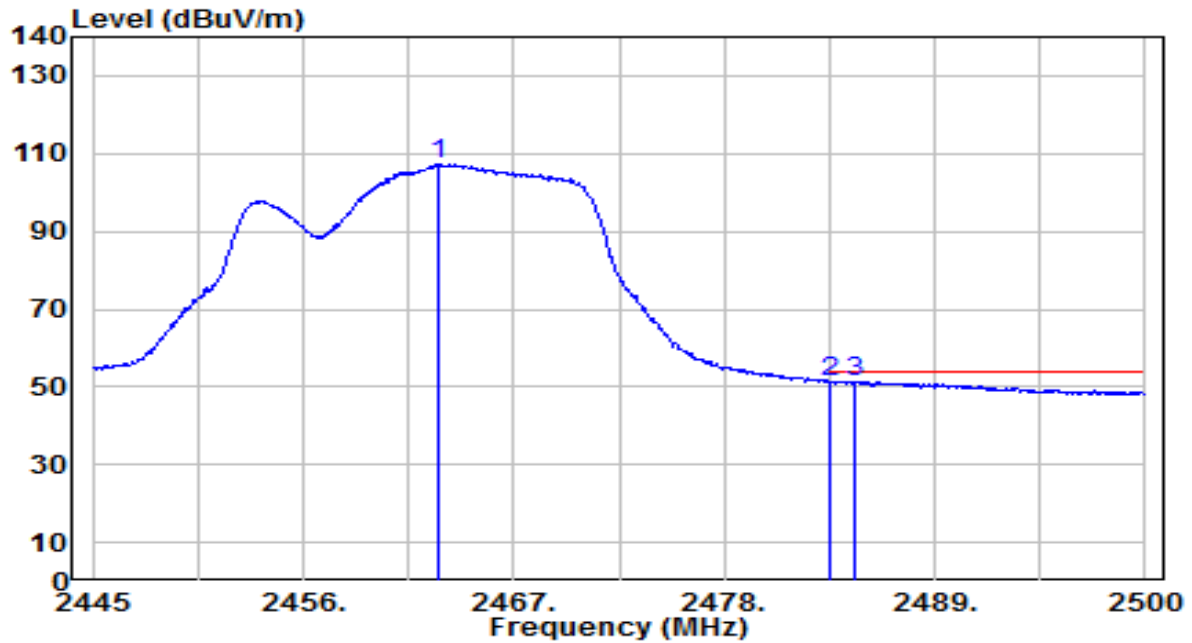


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.095	74.98	32.22	107.20	N/A	N/A	105	210	Average
2	2483.500	18.74	32.30	51.04	-2.96	54.00	105	210	Average
3	* 2484.875	19.02	32.30	51.32	-2.68	54.00	105	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

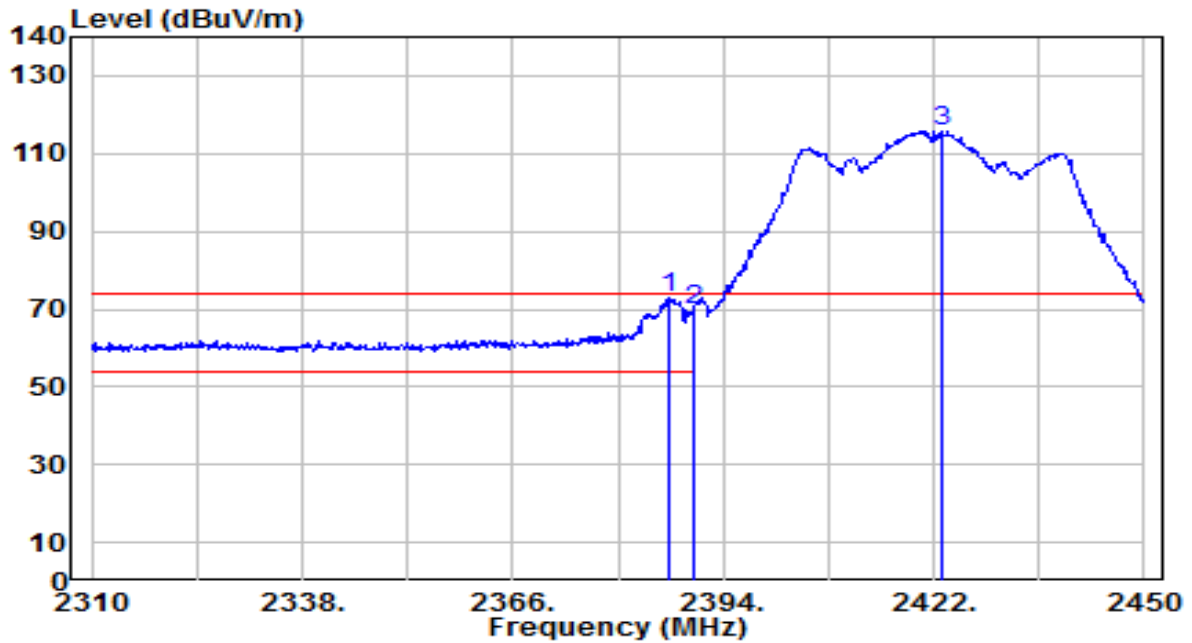


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.720	40.90	31.94	72.83	-1.17	74.00	235	140	Peak
2		2390.000	37.53	31.95	69.48	-4.52	74.00	235	140	Peak
3		2422.980	83.69	32.07	115.76	N/A	N/A	235	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

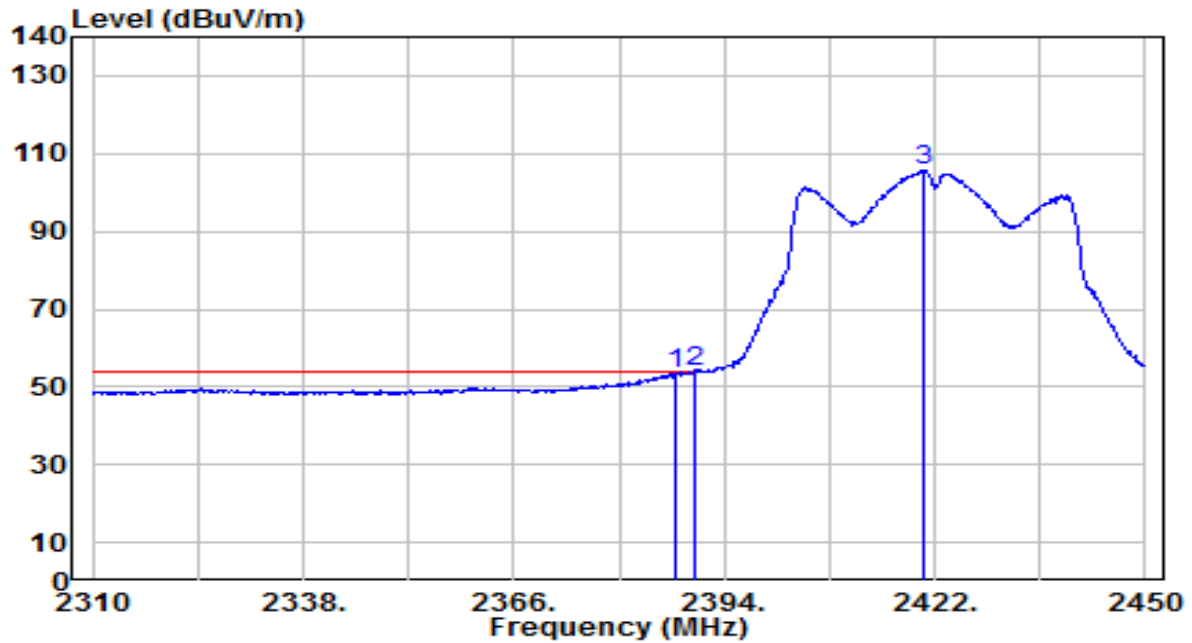


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.700	21.33	31.94	53.27	-0.73	54.00	235	140	Average
2	* 2390.000	21.77	31.95	53.72	-0.28	54.00	235	140	Average
3	2420.600	73.64	32.06	105.70	N/A	N/A	235	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

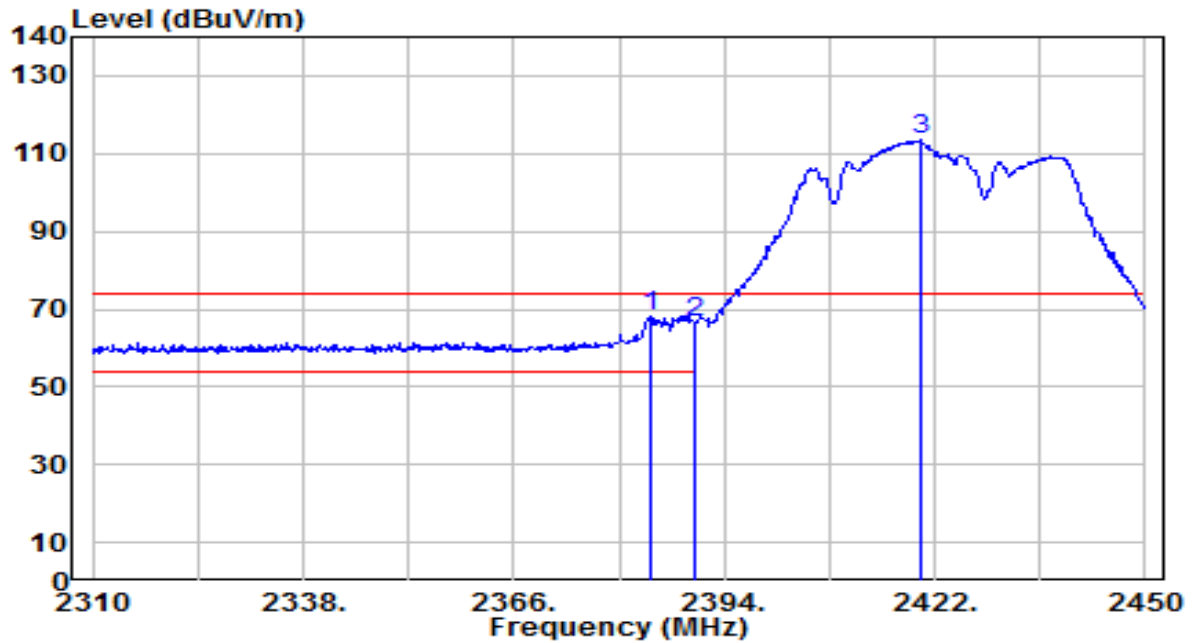


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.060	35.96	31.93	67.89	-6.11	74.00	130	210	Peak
2		2390.000	34.59	31.95	66.54	-7.46	74.00	130	210	Peak
3		2420.180	81.32	32.06	113.38	N/A	N/A	130	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

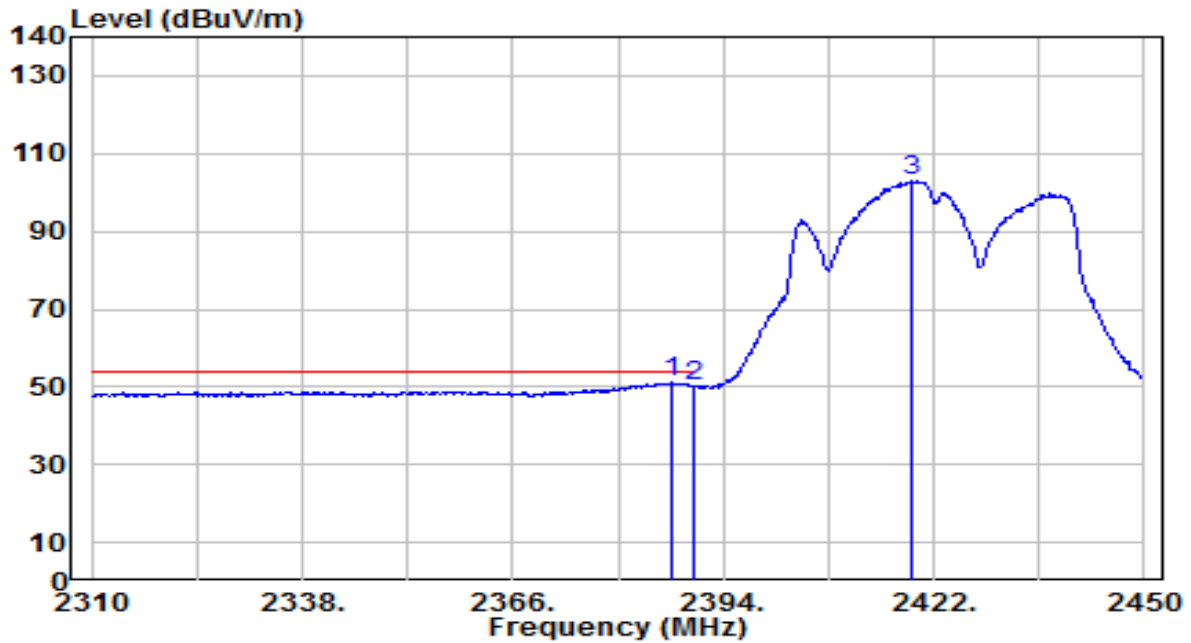


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	19.23	31.94	51.17	-2.83	54.00	130	210	Average
2		2390.000	18.40	31.95	50.35	-3.65	54.00	130	210	Average
3		2419.060	71.07	32.06	103.13	N/A	N/A	130	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

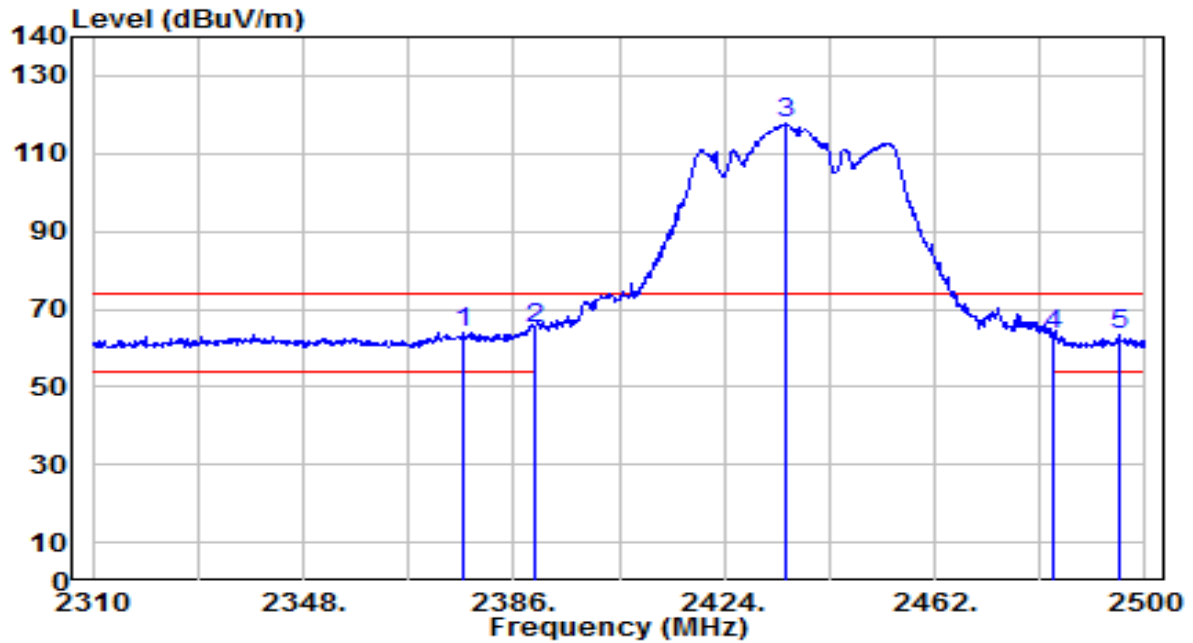


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2376.690	32.25	31.90	64.15	-9.85	74.00	270	215	Peak
2	* 2390.000	32.96	31.95	64.91	-9.09	74.00	270	215	Peak
3	2435.210	85.59	32.12	117.71	N/A	N/A	270	215	Peak
4	2483.500	30.94	32.30	63.23	-10.77	74.00	270	215	Peak
5	2495.250	31.07	32.34	63.41	-10.59	74.00	270	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

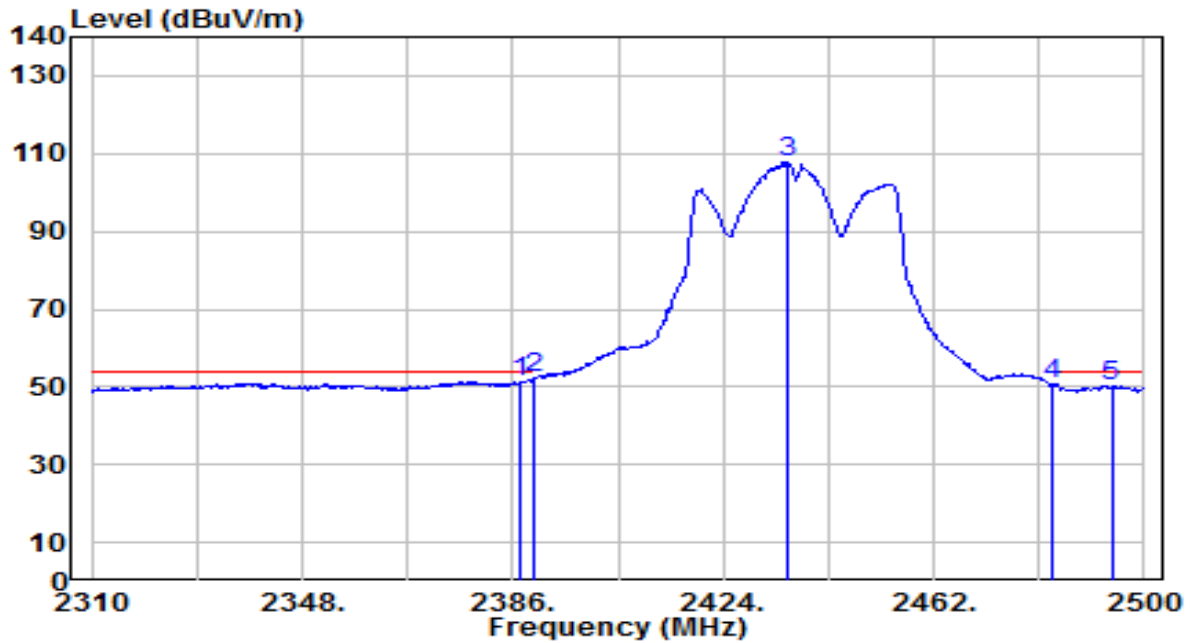


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.520	19.31	31.94	51.25	-2.75	54.00	270	215	Average
2	*	2390.000	20.13	31.95	52.08	-1.92	54.00	270	215	Average
3		2435.780	75.66	32.12	107.78	N/A	N/A	270	215	Average
4		2483.500	18.45	32.30	50.75	-3.25	54.00	270	215	Average
5		2494.110	18.01	32.34	50.35	-3.65	54.00	270	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

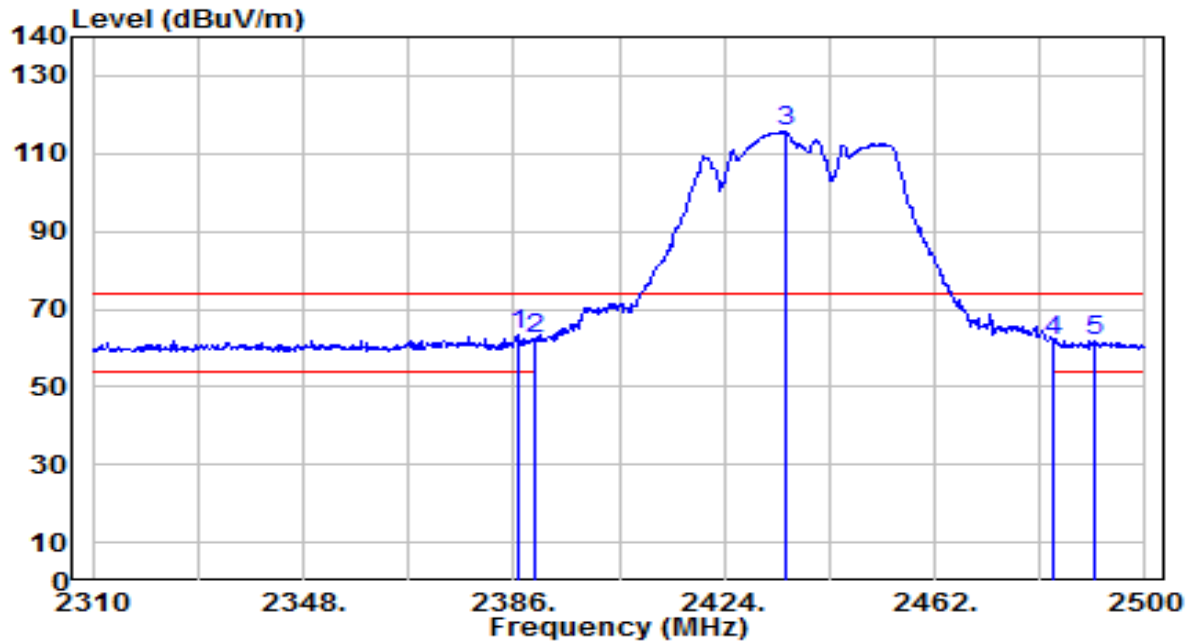


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.760	31.30	31.94	63.24	-10.76	74.00	115	210	Peak
2		2390.000	30.35	31.95	62.30	-11.70	74.00	115	210	Peak
3		2435.020	83.47	32.12	115.59	N/A	N/A	115	210	Peak
4		2483.500	29.48	32.30	61.78	-12.22	74.00	115	210	Peak
5		2491.070	29.60	32.33	61.92	-12.08	74.00	115	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

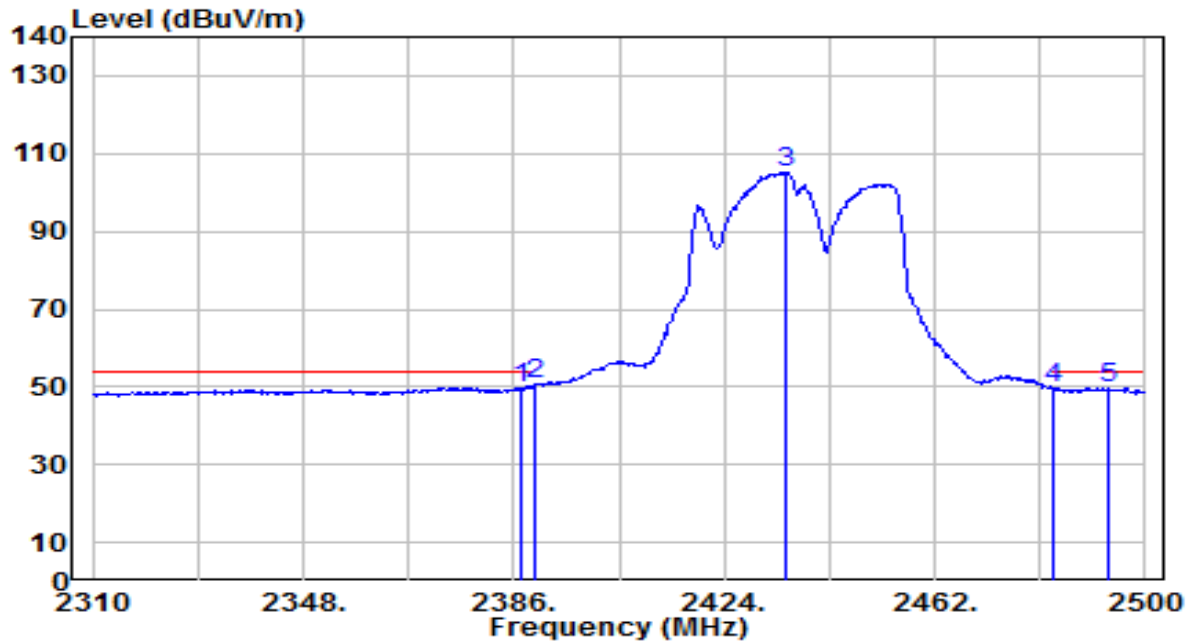


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.140	17.77	31.94	49.70	-4.30	54.00	115	210	Average
2	*	2390.000	18.66	31.95	50.61	-3.39	54.00	115	210	Average
3		2435.210	72.94	32.12	105.06	N/A	N/A	115	210	Average
4		2483.500	17.24	32.30	49.54	-4.46	54.00	115	210	Average
5		2493.540	17.25	32.34	49.58	-4.42	54.00	115	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

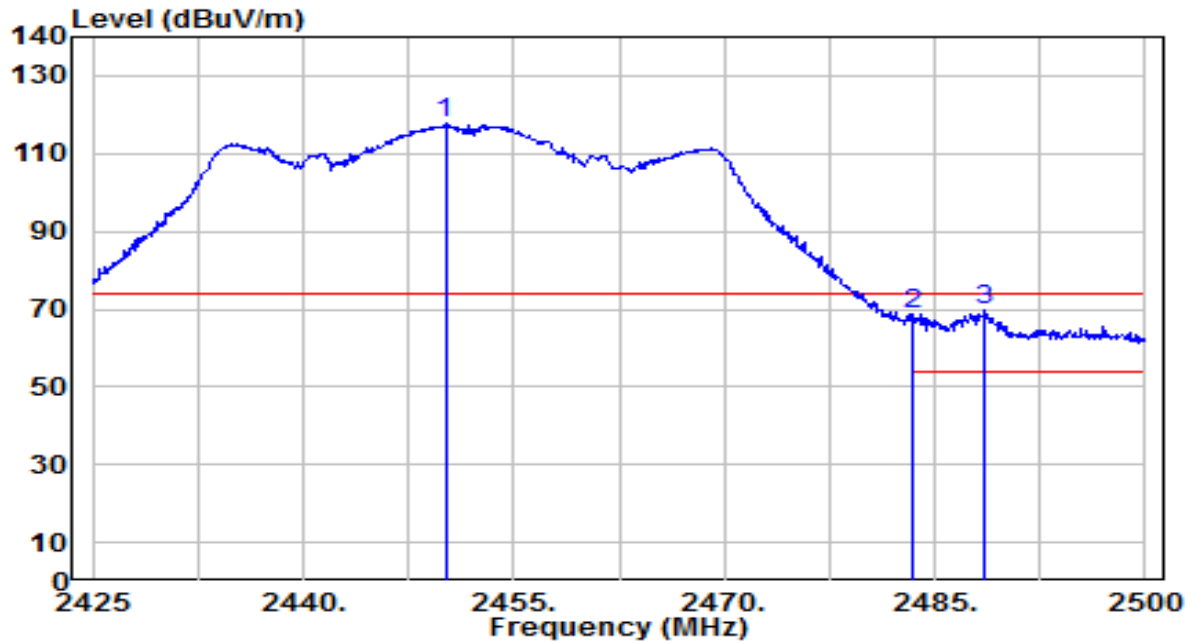


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.125	85.38	32.17	117.55	N/A	N/A	240	215	Peak
2	2483.500	36.57	32.30	68.87	-5.13	74.00	240	215	Peak
3	* 2488.600	37.24	32.32	69.56	-4.44	74.00	240	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

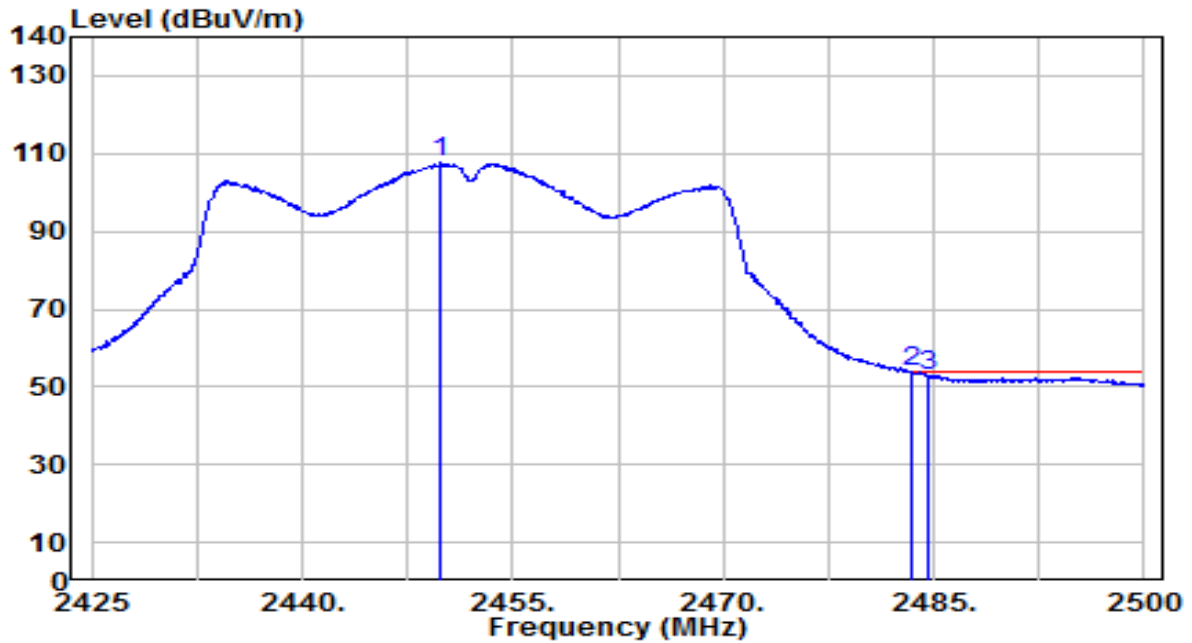


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2449.900	75.41	32.17	107.58	N/A	N/A	240	215	Average
2	*	2483.500	21.41	32.30	53.71	-0.29	54.00	240	215	Average
3		2484.700	20.61	32.30	52.91	-1.09	54.00	240	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

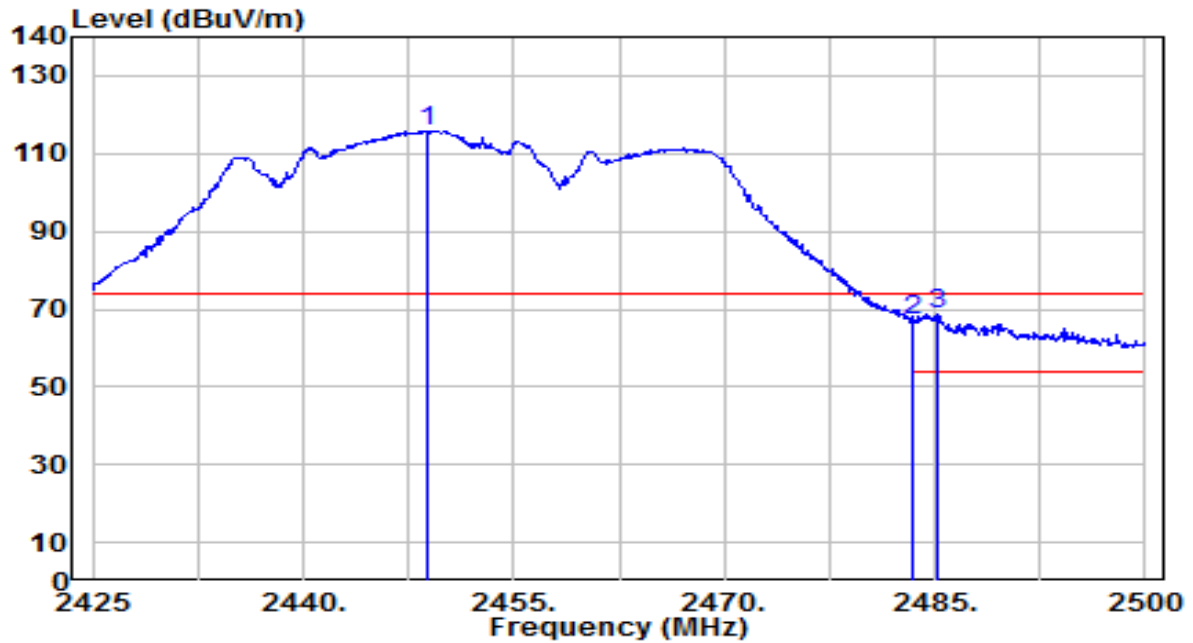


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.925	83.47	32.17	115.64	N/A	N/A	105	210	Peak
2	2483.500	34.97	32.30	67.27	-6.73	74.00	105	210	Peak
3	* 2485.150	36.51	32.30	68.81	-5.19	74.00	105	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

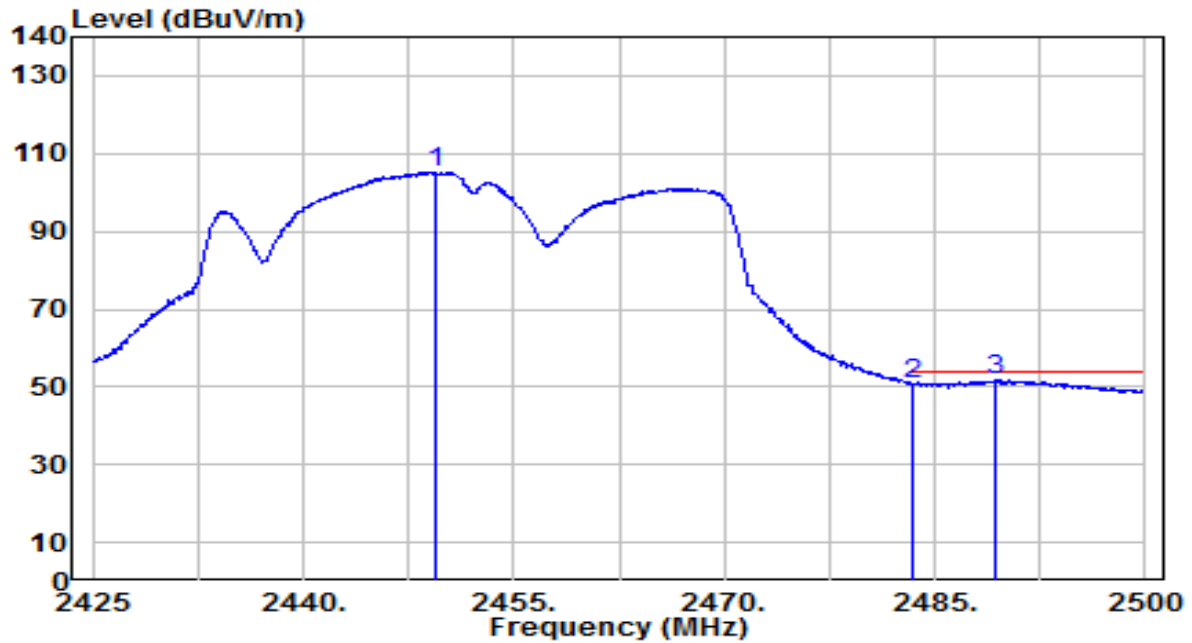


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.450	73.12	32.17	105.29	N/A	N/A	105	210	Average
2	2483.500	18.41	32.30	50.71	-3.29	54.00	105	210	Average
3	* 2489.350	19.30	32.32	51.62	-2.38	54.00	105	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

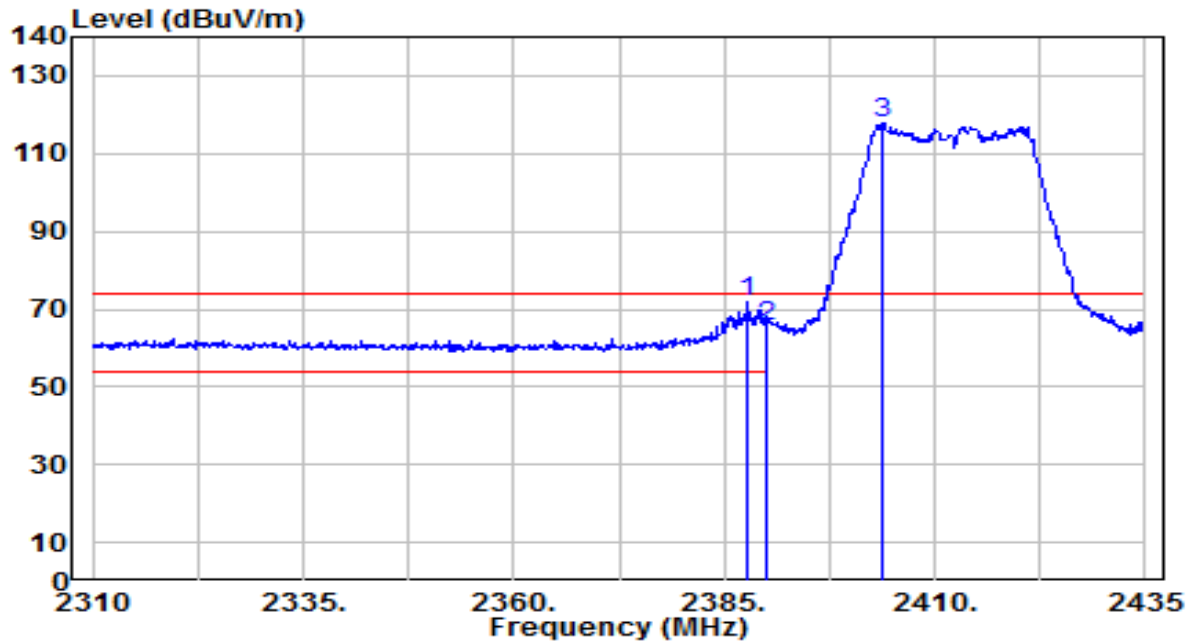


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.875	39.70	31.94	71.64	-2.36	74.00	255	145	Peak
2		2390.000	33.61	31.95	65.56	-8.44	74.00	255	145	Peak
3		2403.625	86.03	32.00	118.03	N/A	N/A	255	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

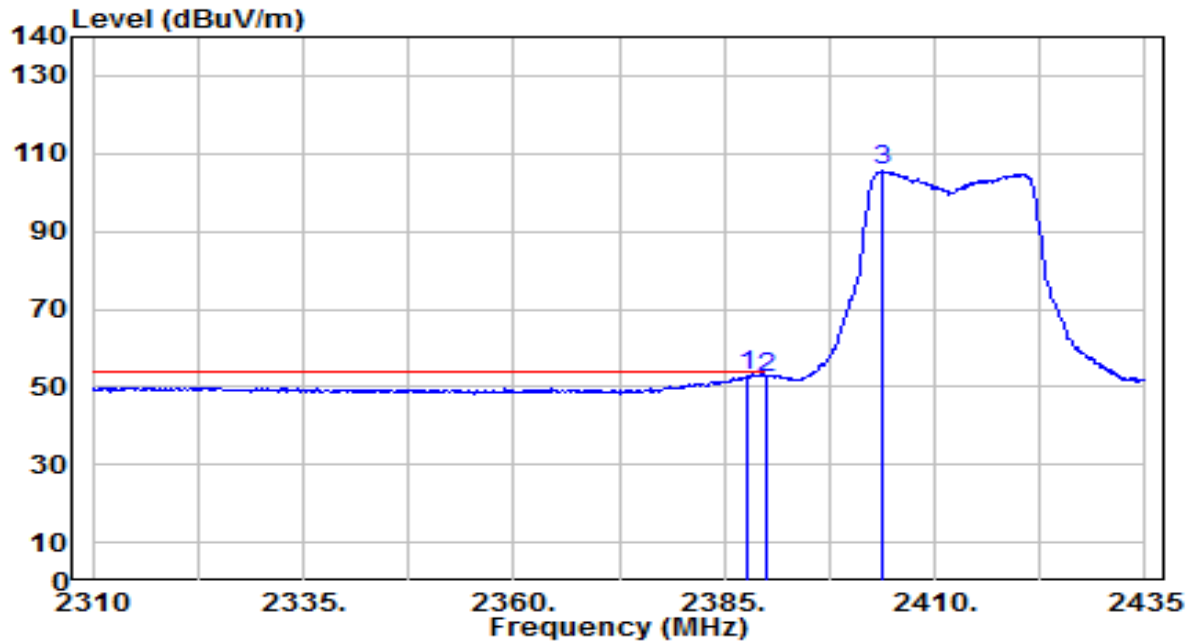


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.875	20.69	31.94	52.63	-1.37	54.00	255	145	Average
2		2390.000	20.38	31.95	52.32	-1.68	54.00	255	145	Average
3		2403.750	73.64	32.00	105.64	N/A	N/A	255	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

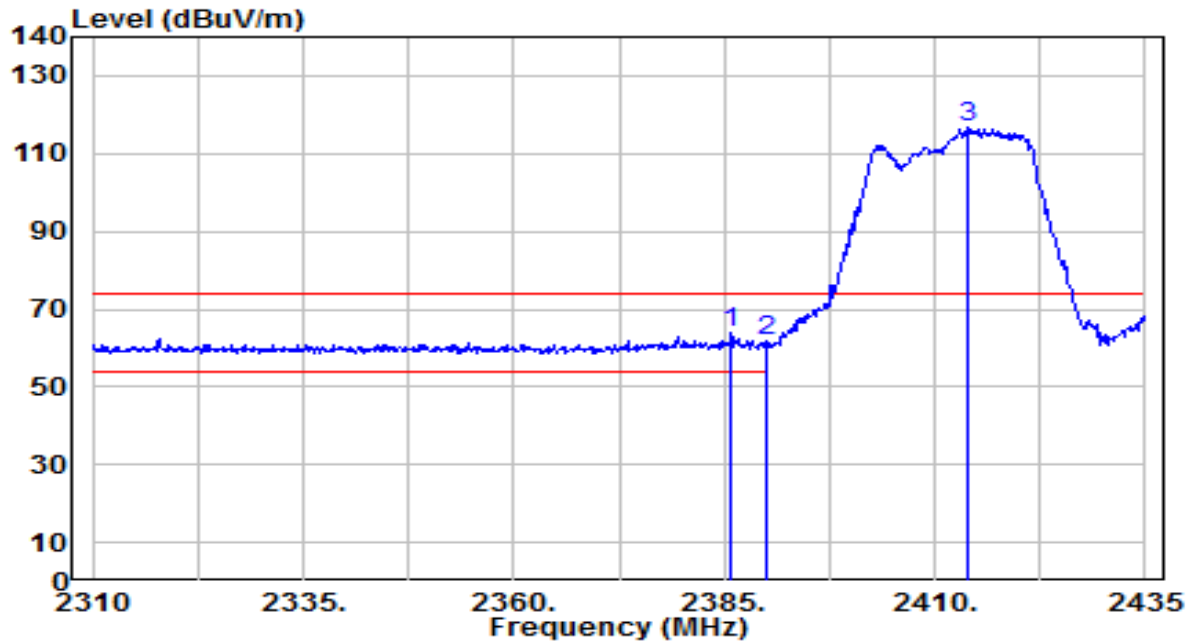


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.750	32.08	31.93	64.01	-9.99	74.00	130	210	Peak
2		2390.000	29.86	31.95	61.81	-12.19	74.00	130	210	Peak
3		2414.000	84.67	32.04	116.70	N/A	N/A	130	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

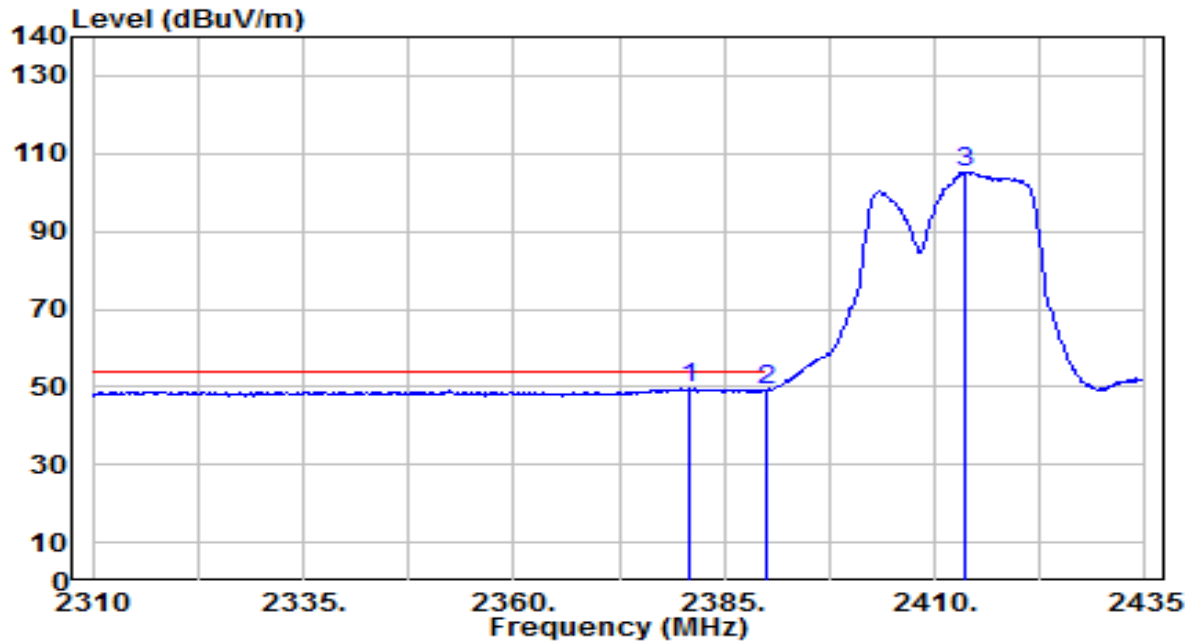


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.000	17.70	31.91	49.61	-4.39	54.00	130	210	Average
2		2390.000	17.20	31.95	49.15	-4.85	54.00	130	210	Average
3		2413.750	73.19	32.04	105.23	N/A	N/A	130	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

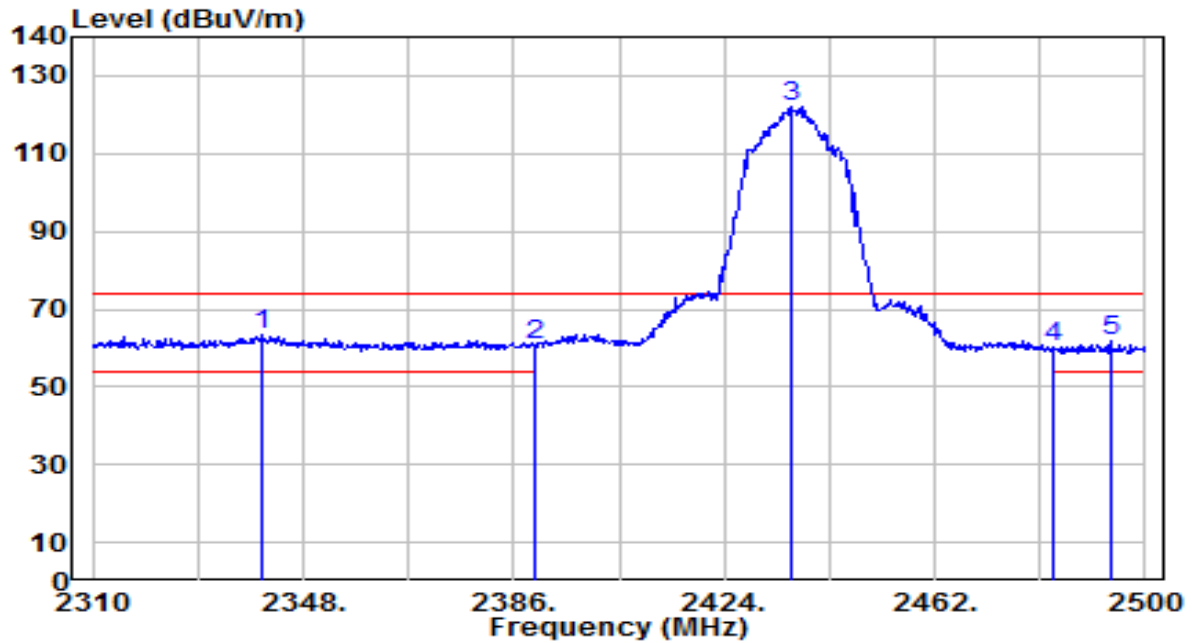


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.590	31.81	31.76	63.57	-10.43	74.00	215	135	Peak
2		2390.000	28.80	31.95	60.75	-13.25	74.00	215	135	Peak
3		2436.160	89.88	32.12	122.01	N/A	N/A	215	135	Peak
4		2483.500	27.83	32.30	60.13	-13.87	74.00	215	135	Peak
5		2493.730	29.22	32.34	61.56	-12.44	74.00	215	135	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

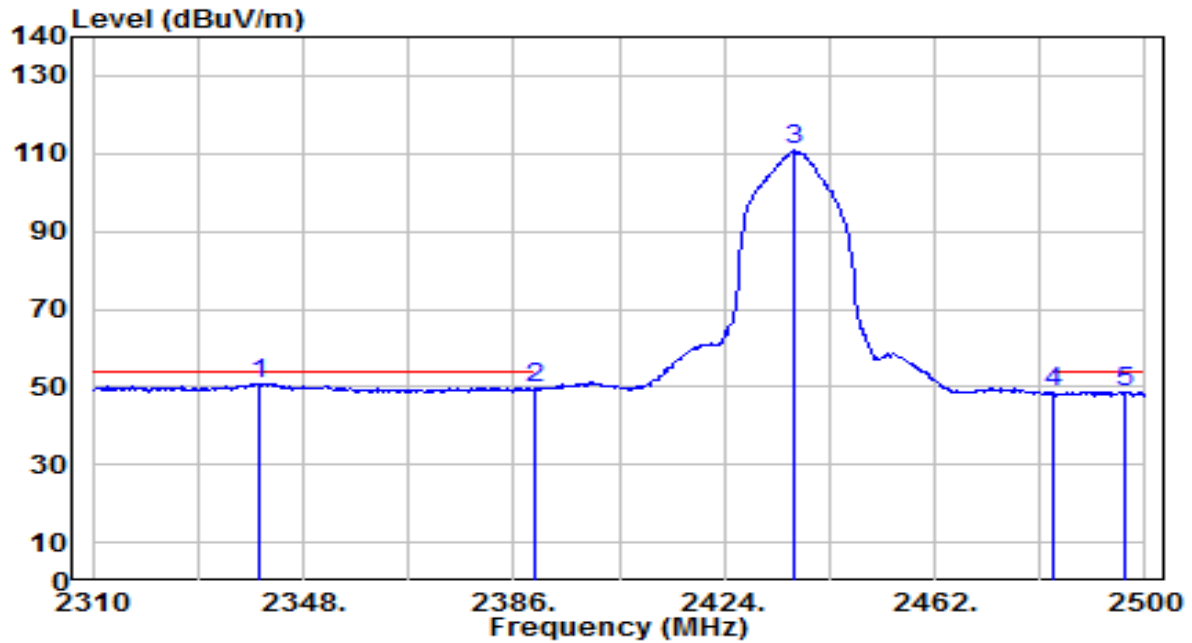


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.020	19.17	31.76	50.94	-3.06	54.00	215	135	Average
2		2390.000	17.50	31.95	49.45	-4.55	54.00	215	135	Average
3		2436.540	78.57	32.12	110.69	N/A	N/A	215	135	Average
4		2483.500	16.31	32.30	48.61	-5.39	54.00	215	135	Average
5		2496.390	16.34	32.35	48.68	-5.32	54.00	215	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

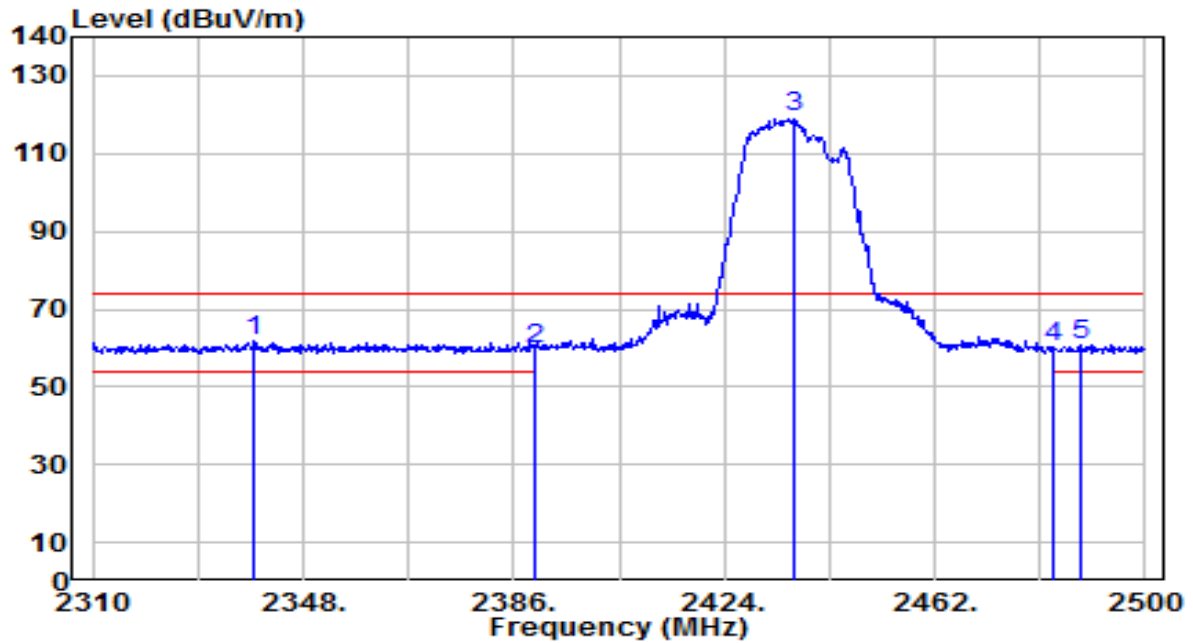


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.070	30.15	31.76	61.91	-12.09	74.00	115	210	Peak
2		2390.000	27.97	31.95	59.92	-14.08	74.00	115	210	Peak
3		2436.540	87.10	32.12	119.22	N/A	N/A	115	210	Peak
4		2483.500	28.02	32.30	60.32	-13.68	74.00	115	210	Peak
5		2488.410	28.47	32.32	60.78	-13.22	74.00	115	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

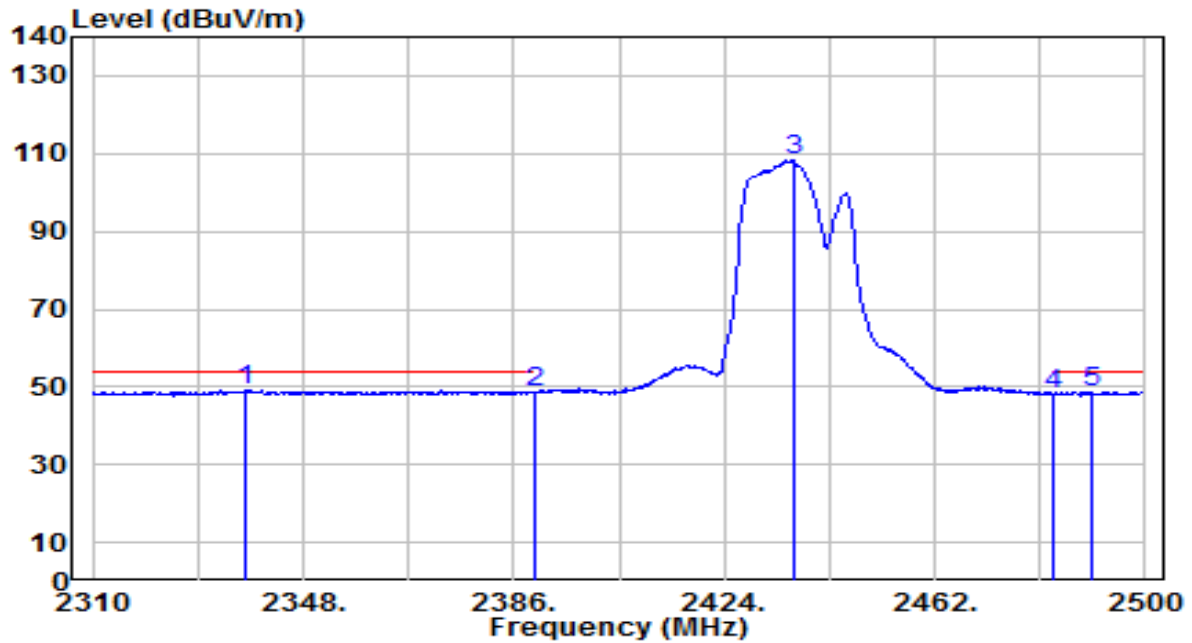


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2337.550	17.24	31.75	48.99	-5.01	54.00	115	210	Average
2		2390.000	16.54	31.95	48.49	-5.51	54.00	115	210	Average
3		2436.540	76.18	32.12	108.30	N/A	N/A	115	210	Average
4		2483.500	15.80	32.30	48.10	-5.90	54.00	115	210	Average
5		2490.310	16.51	32.32	48.84	-5.16	54.00	115	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

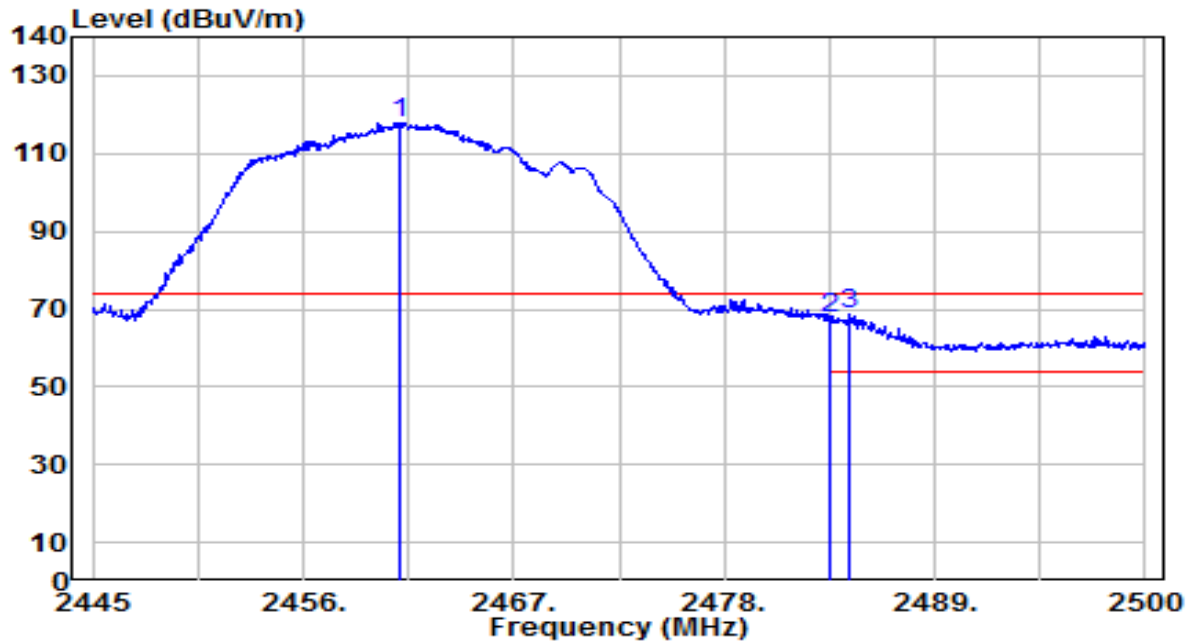


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	85.71	32.21	117.92	N/A	N/A	180	125	Peak
2	2483.500	35.21	32.30	67.51	-6.49	74.00	180	125	Peak
3	* 2484.600	36.44	32.30	68.75	-5.25	74.00	180	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

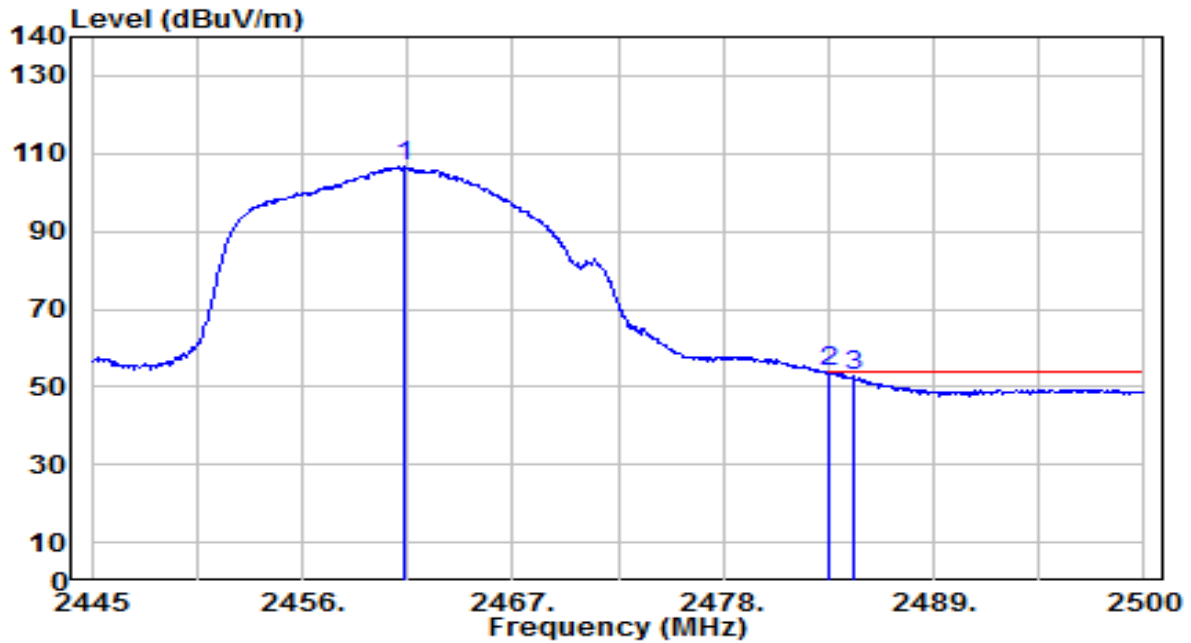


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.390	74.31	32.22	106.53	N/A	N/A	180	125	Average
2	*	2483.500	21.46	32.30	53.76	-0.24	54.00	180	125	Average
3		2484.765	20.27	32.30	52.57	-1.43	54.00	180	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

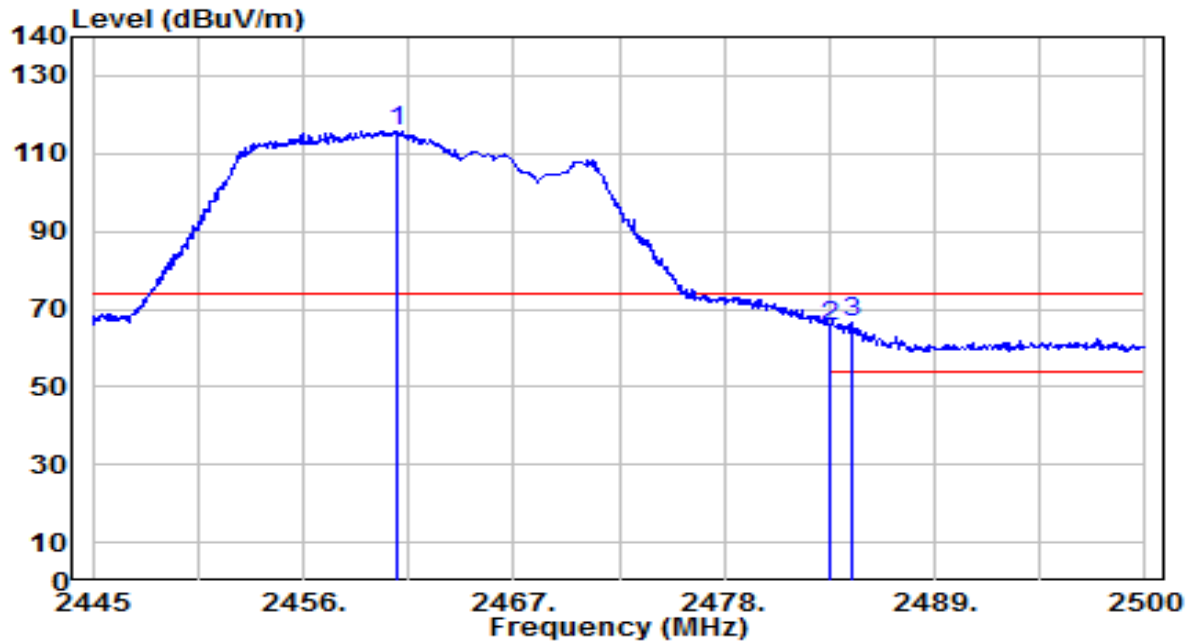


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.950	83.58	32.21	115.79	N/A	N/A	105	210	Peak
2	2483.500	33.36	32.30	65.66	-8.34	74.00	105	210	Peak
3	* 2484.655	34.11	32.30	66.42	-7.58	74.00	105	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

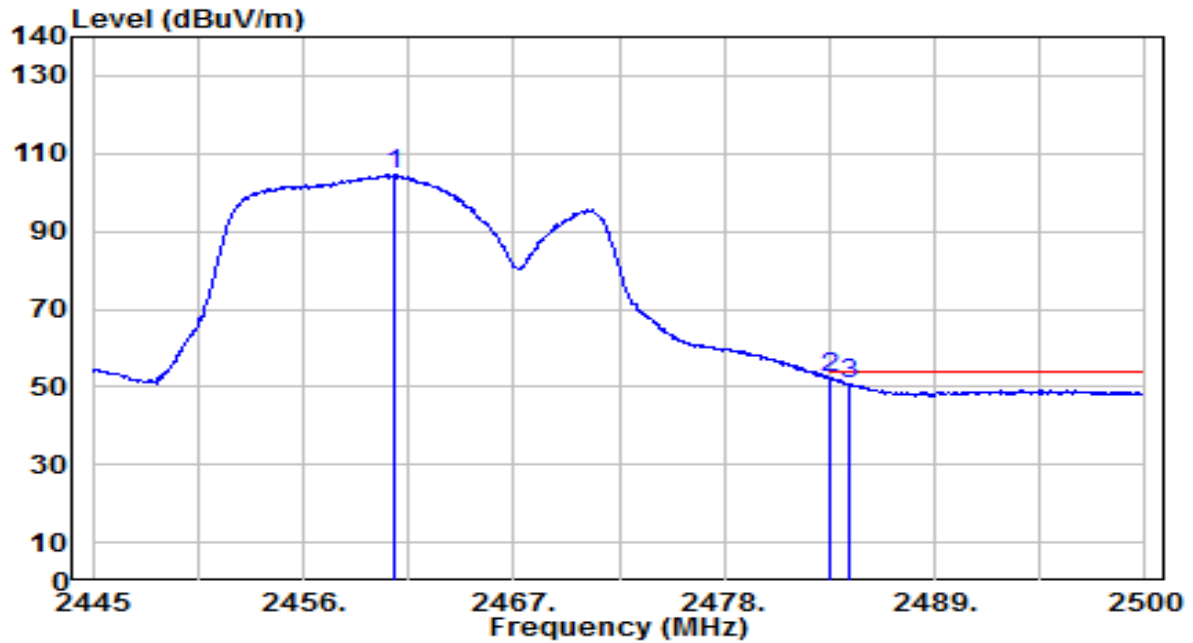


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.785	72.26	32.21	104.47	N/A	N/A	105	210	Average
2	* 2483.500	20.07	32.30	52.37	-1.63	54.00	105	210	Average
3	2484.600	18.61	32.30	50.91	-3.09	54.00	105	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

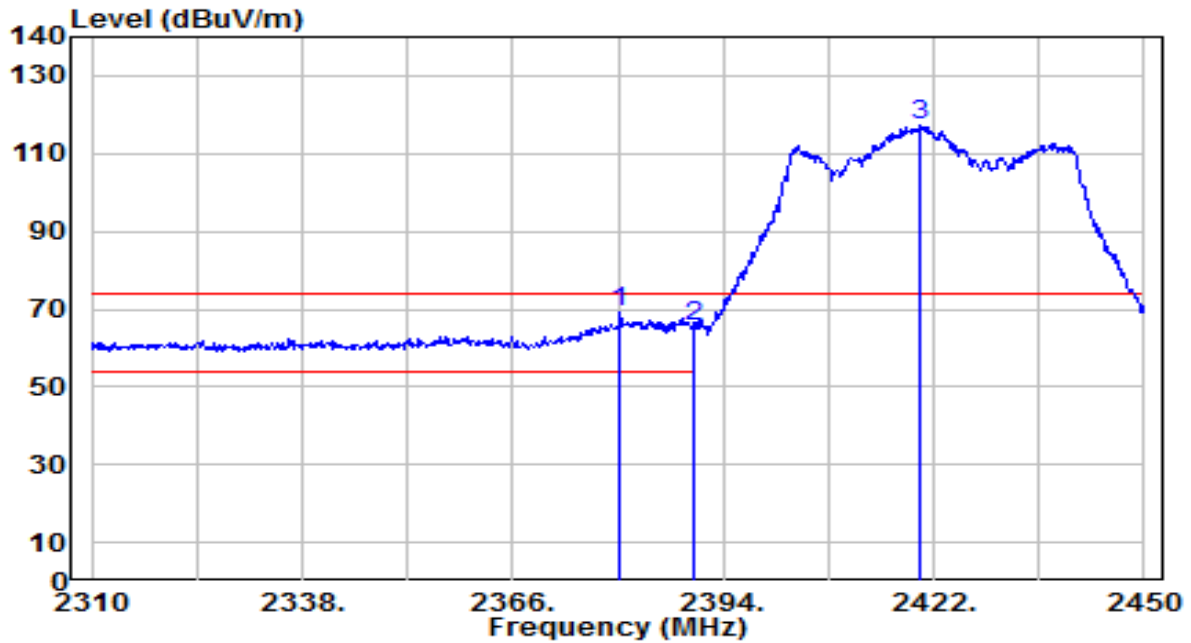


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.280	37.44	31.91	69.36	-4.64	74.00	255	145	Peak
2		2390.000	33.51	31.95	65.46	-8.54	74.00	255	145	Peak
3		2420.320	84.96	32.06	117.02	N/A	N/A	255	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

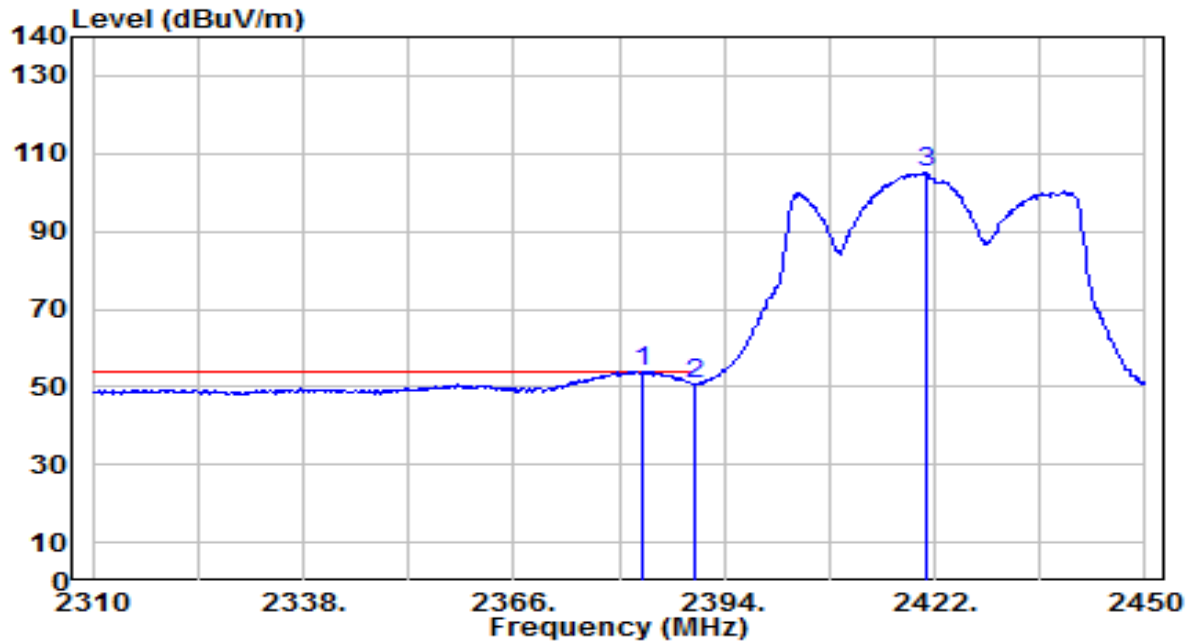


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.080	21.89	31.92	53.81	-0.19	54.00	255	145	Average
2		2390.000	19.01	31.95	50.96	-3.04	54.00	255	145	Average
3		2421.020	72.91	32.06	104.97	N/A	N/A	255	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

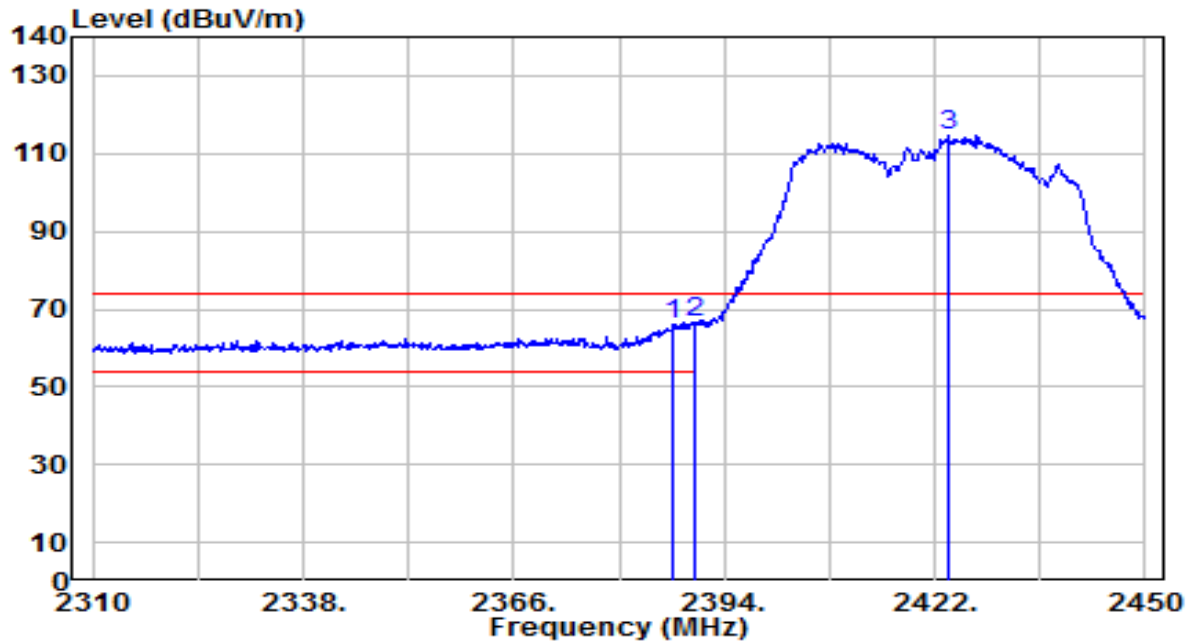


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.280	34.04	31.94	65.98	-8.02	74.00	130	210	Peak
2	*	2390.000	34.42	31.95	66.36	-7.64	74.00	130	210	Peak
3		2423.820	82.68	32.08	114.75	N/A	N/A	130	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

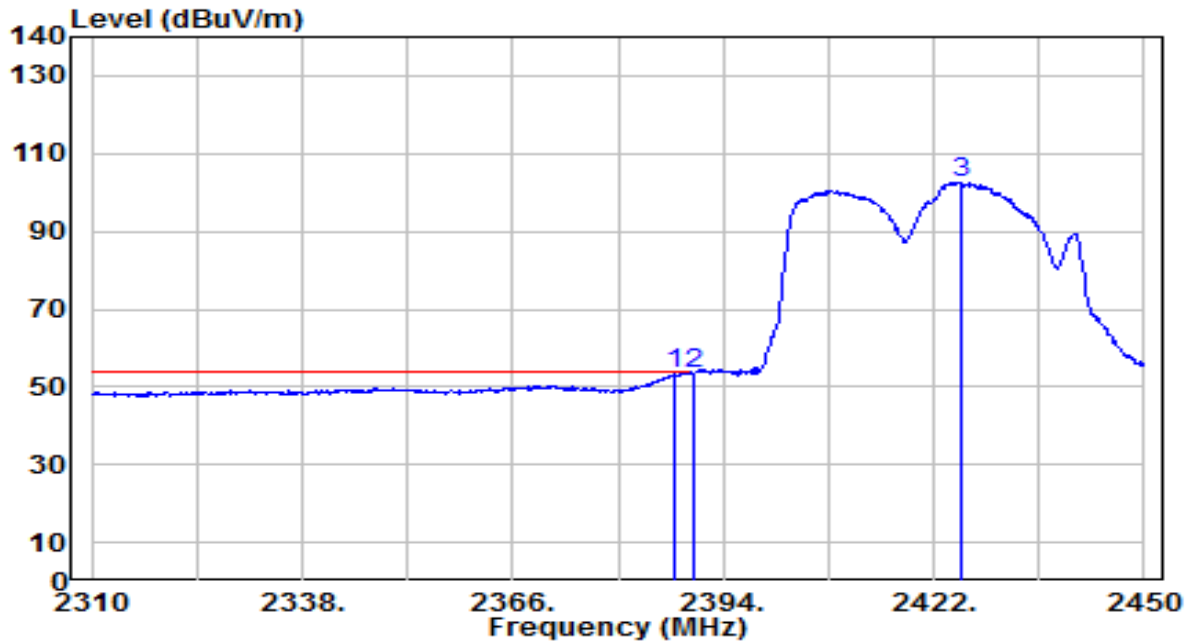


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.560	21.19	31.94	53.13	-0.87	54.00	130	210	Average
2	*	2390.000	21.60	31.95	53.55	-0.45	54.00	130	210	Average
3		2425.500	70.62	32.08	102.71	N/A	N/A	130	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

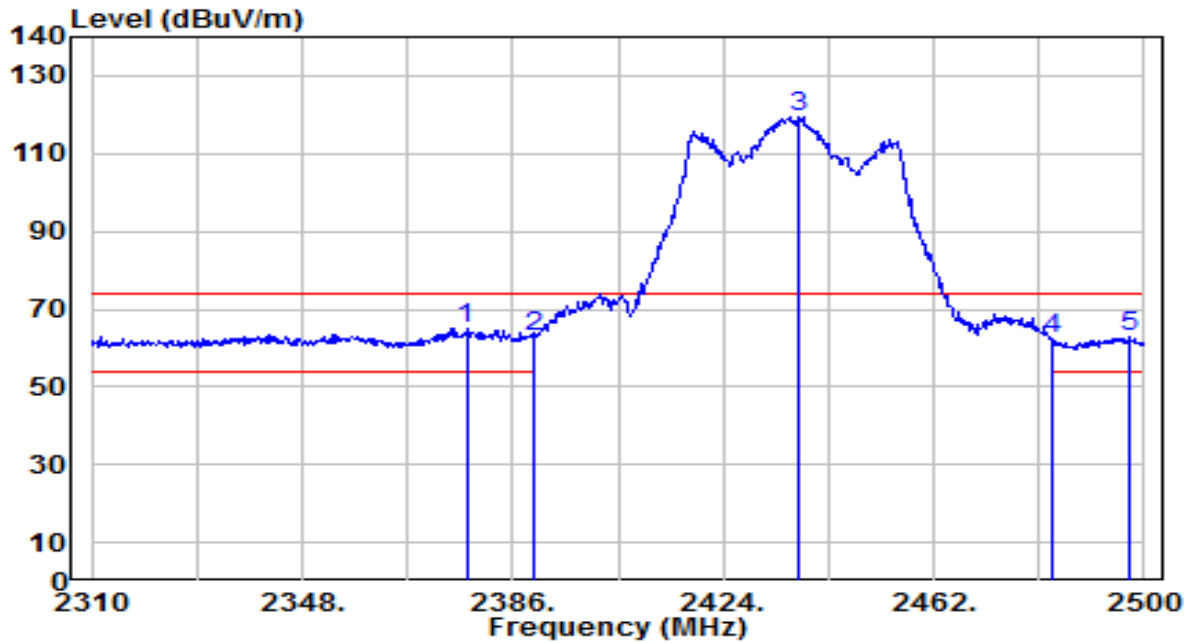


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2377.640	33.28	31.90	65.18	-8.82	74.00	215	135	Peak
2		2390.000	31.03	31.95	62.98	-11.02	74.00	215	135	Peak
3		2437.490	87.44	32.13	119.57	N/A	N/A	215	135	Peak
4		2483.500	29.82	32.30	62.12	-11.88	74.00	215	135	Peak
5		2497.530	30.56	32.35	62.91	-11.09	74.00	215	135	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

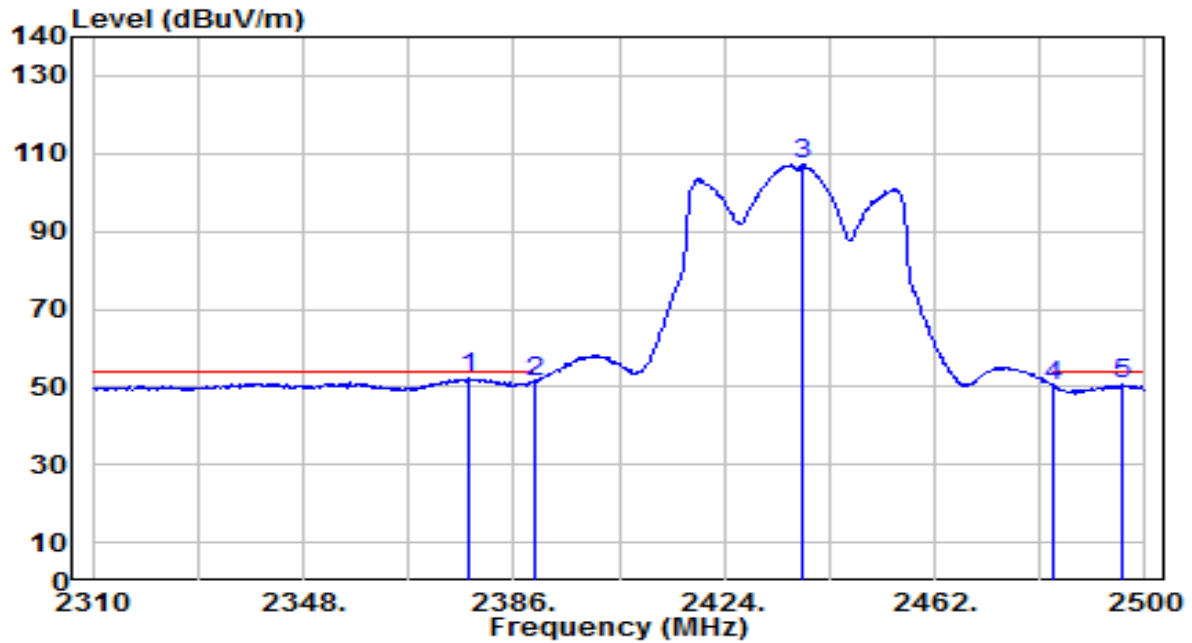


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.020	20.15	31.90	52.05	-1.95	54.00	215	135	Average
2		2390.000	19.43	31.95	51.38	-2.62	54.00	215	135	Average
3		2438.250	74.98	32.13	107.11	N/A	N/A	215	135	Average
4		2483.500	18.02	32.30	50.32	-3.68	54.00	215	135	Average
5		2495.630	18.29	32.34	50.64	-3.36	54.00	215	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

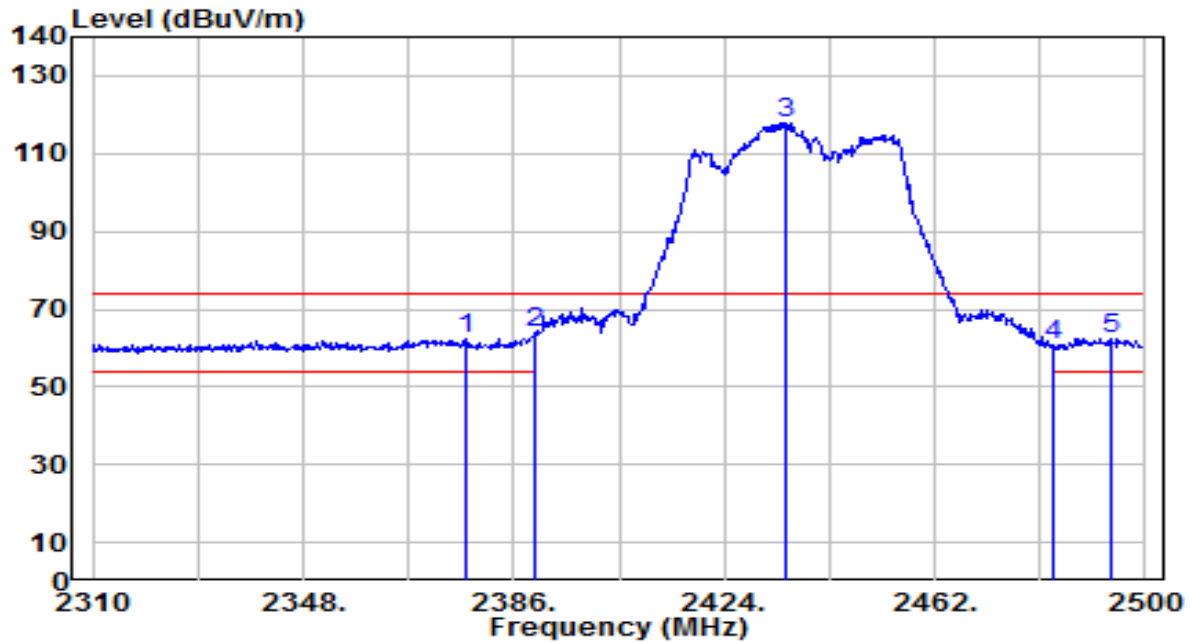


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2377.450	30.70	31.90	62.60	-11.40	74.00	115	210	Peak
2	*	2390.000	31.99	31.95	63.94	-10.06	74.00	115	210	Peak
3		2435.210	85.85	32.12	117.97	N/A	N/A	115	210	Peak
4		2483.500	28.58	32.30	60.88	-13.12	74.00	115	210	Peak
5		2493.730	30.05	32.34	62.39	-11.61	74.00	115	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

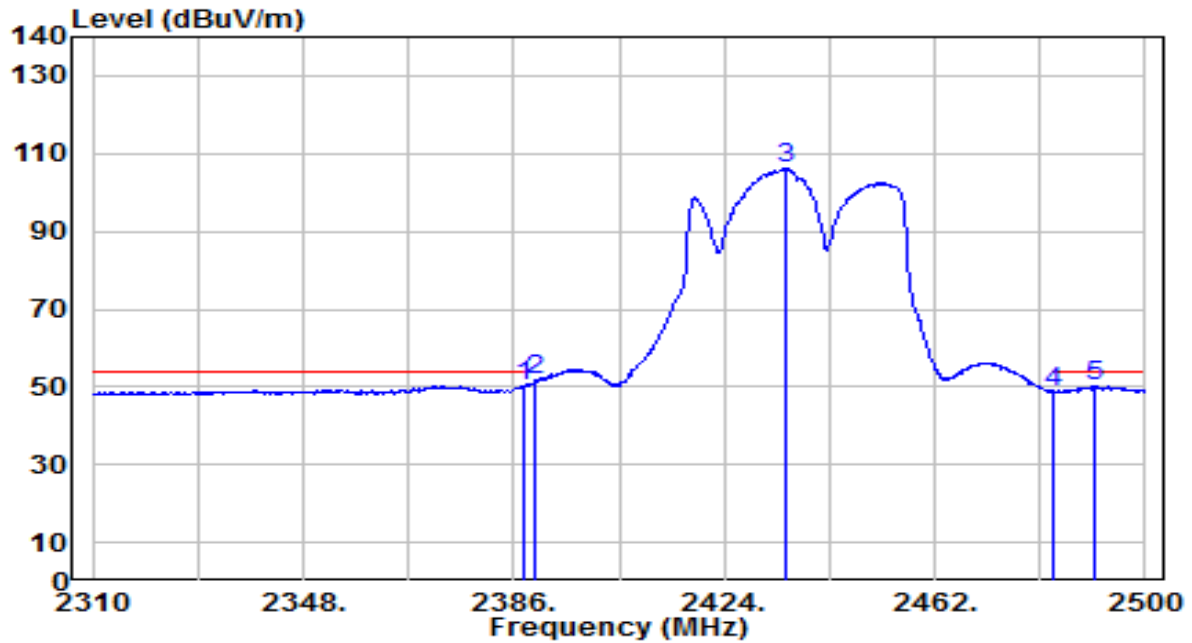


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.900	18.23	31.94	50.17	-3.83	54.00	115	210	Average
2	*	2390.000	19.59	31.95	51.54	-2.46	54.00	115	210	Average
3		2435.210	74.32	32.12	106.44	N/A	N/A	115	210	Average
4		2483.500	16.35	32.30	48.65	-5.35	54.00	115	210	Average
5		2490.880	17.84	32.33	50.16	-3.84	54.00	115	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

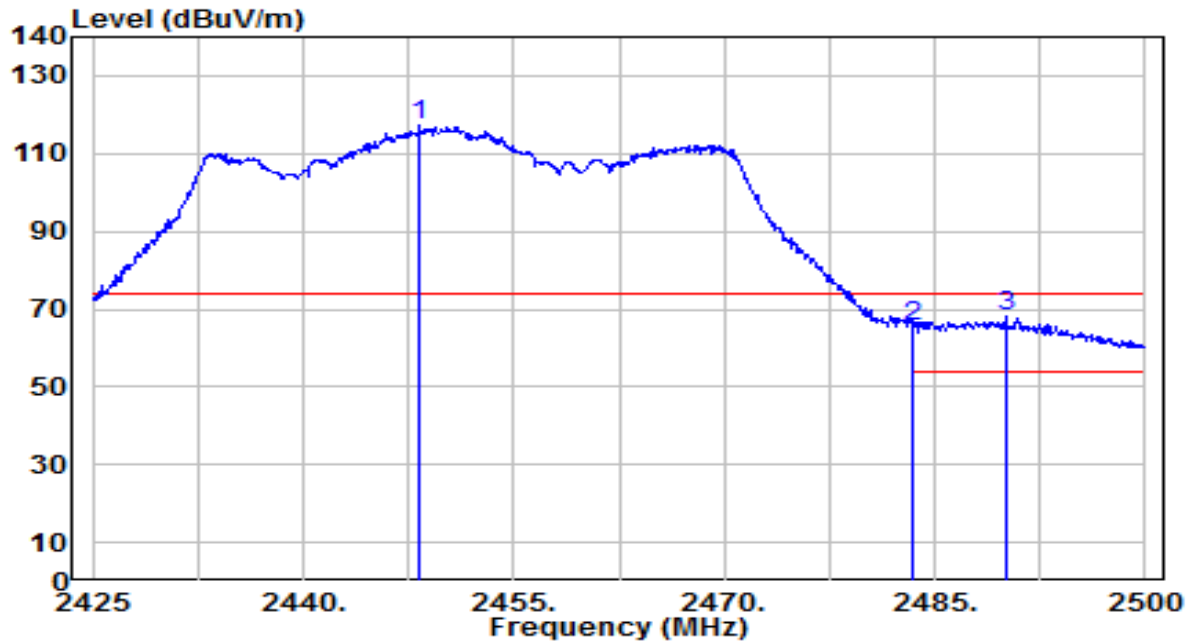


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.325	85.04	32.17	117.20	N/A	N/A	180	125	Peak
2	2483.500	33.39	32.30	65.69	-8.31	74.00	180	125	Peak
3	* 2490.025	35.97	32.32	68.30	-5.70	74.00	180	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

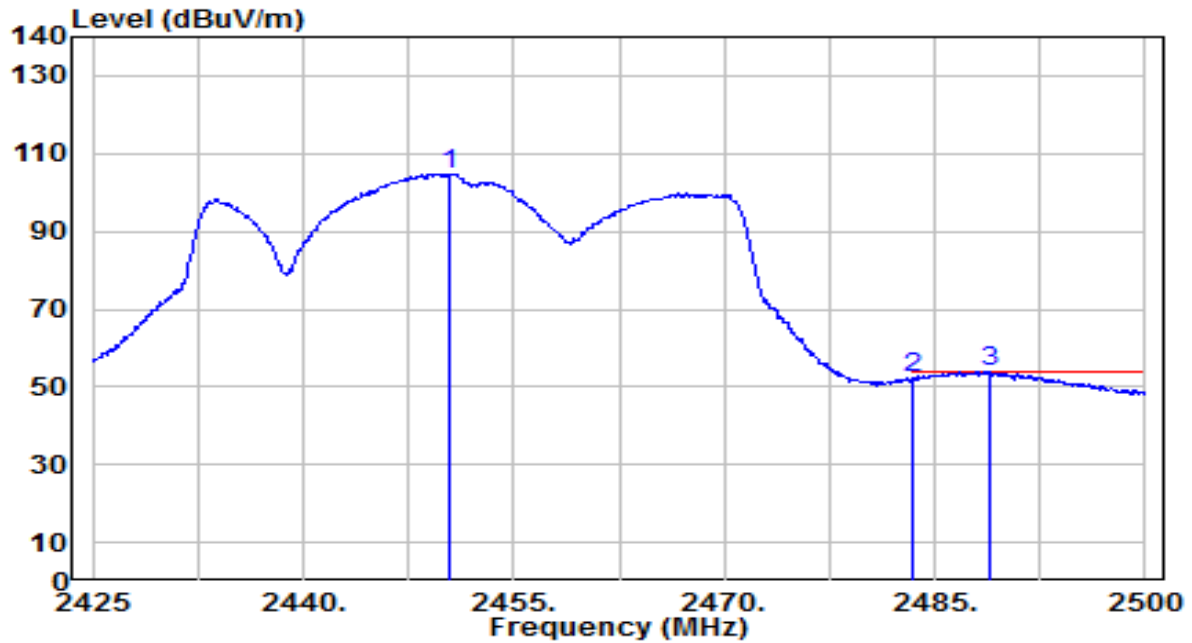


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.425	72.69	32.17	104.86	N/A	N/A	180	125	Average
2	2483.500	19.86	32.30	52.16	-1.84	54.00	180	125	Average
3	* 2488.975	21.48	32.32	53.80	-0.20	54.00	180	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

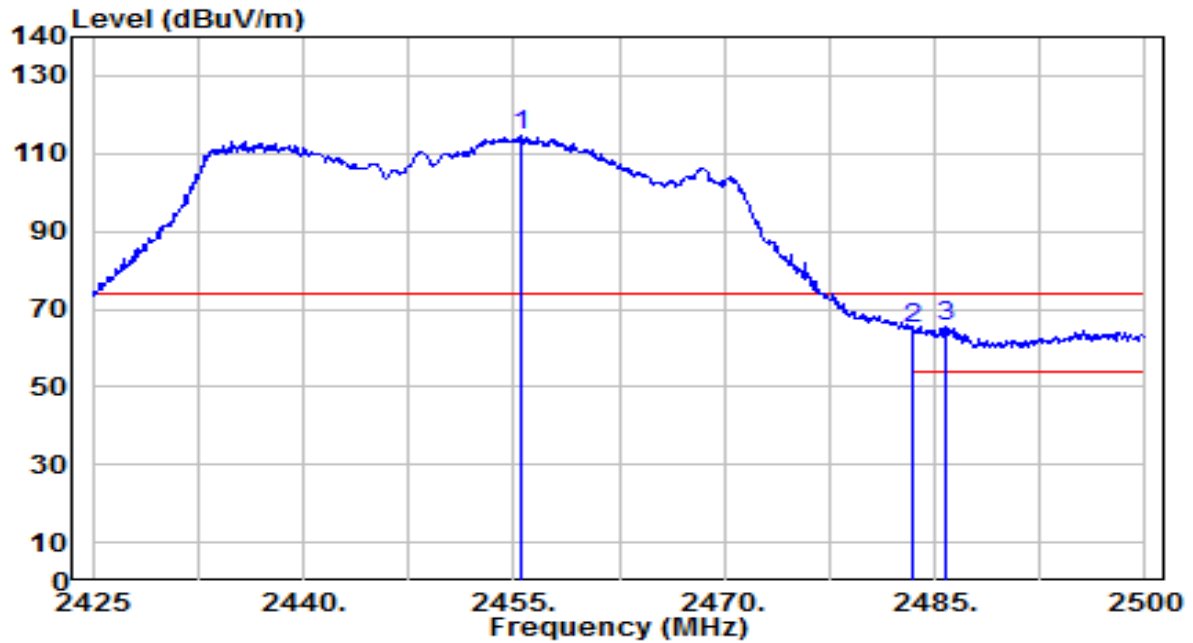


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.450	82.31	32.19	114.50	N/A	N/A	105	210	Peak
2	2483.500	32.91	32.30	65.21	-8.79	74.00	105	210	Peak
3	* 2485.825	33.11	32.31	65.42	-8.58	74.00	105	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

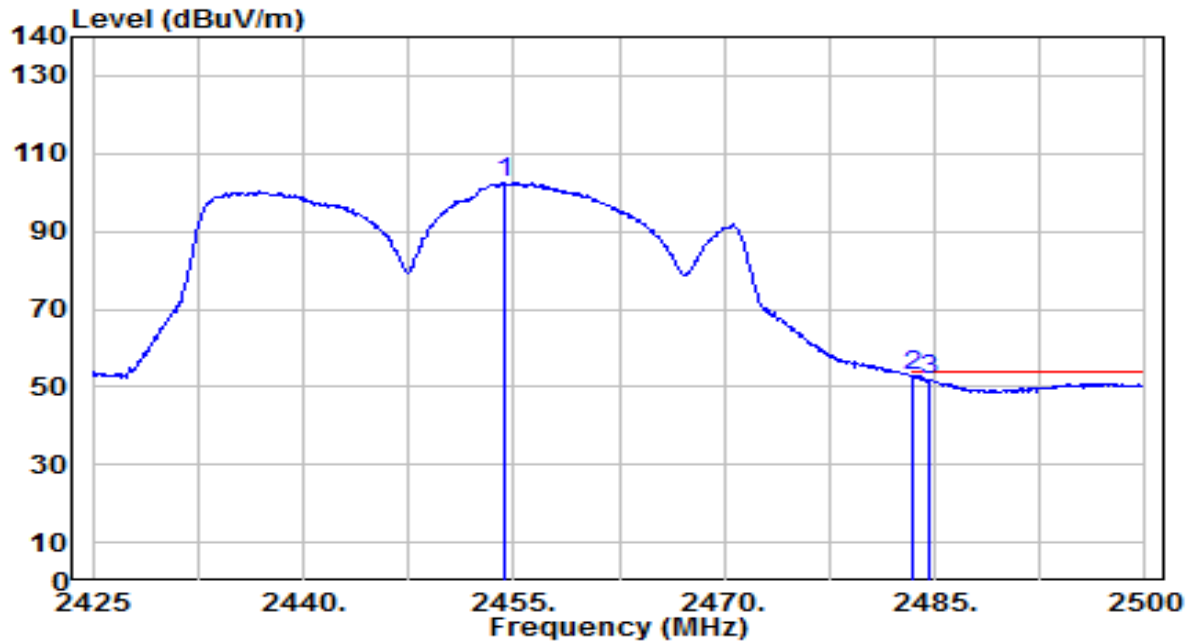


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.325	70.48	32.19	102.67	N/A	N/A	105	210	Average
2	*	2483.500	20.59	32.30	52.89	-1.11	54.00	105	210	Average
3		2484.550	19.54	32.30	51.84	-2.16	54.00	105	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

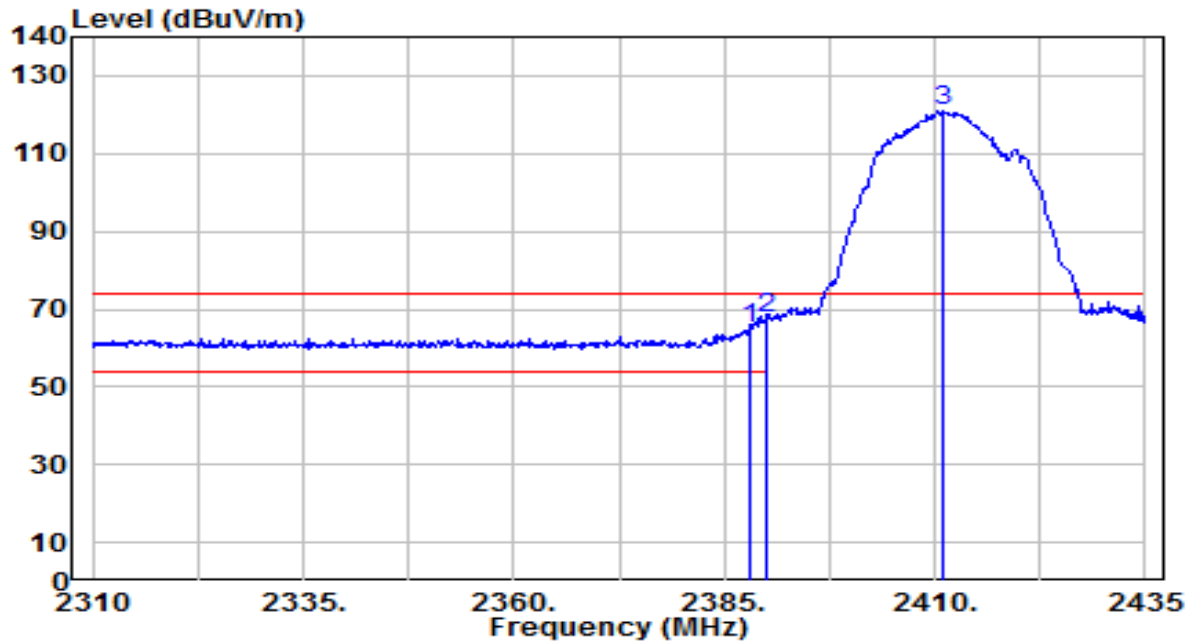


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	32.98	31.94	64.92	-9.08	74.00	190	145	Peak
2	*	2390.000	35.62	31.95	67.57	-6.43	74.00	190	145	Peak
3		2411.125	88.90	32.03	120.93	N/A	N/A	190	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

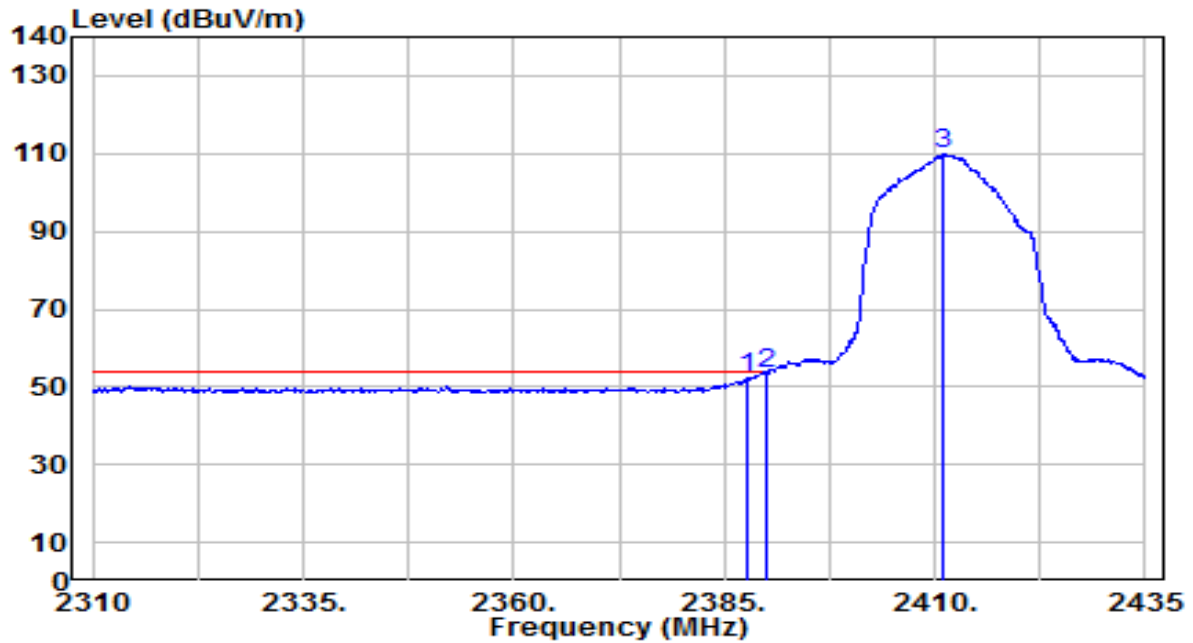


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.750	20.18	31.94	52.12	-1.88	54.00	190	145	Average
2	*	2390.000	21.62	31.95	53.57	-0.43	54.00	190	145	Average
3		2410.875	77.64	32.03	109.67	N/A	N/A	190	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

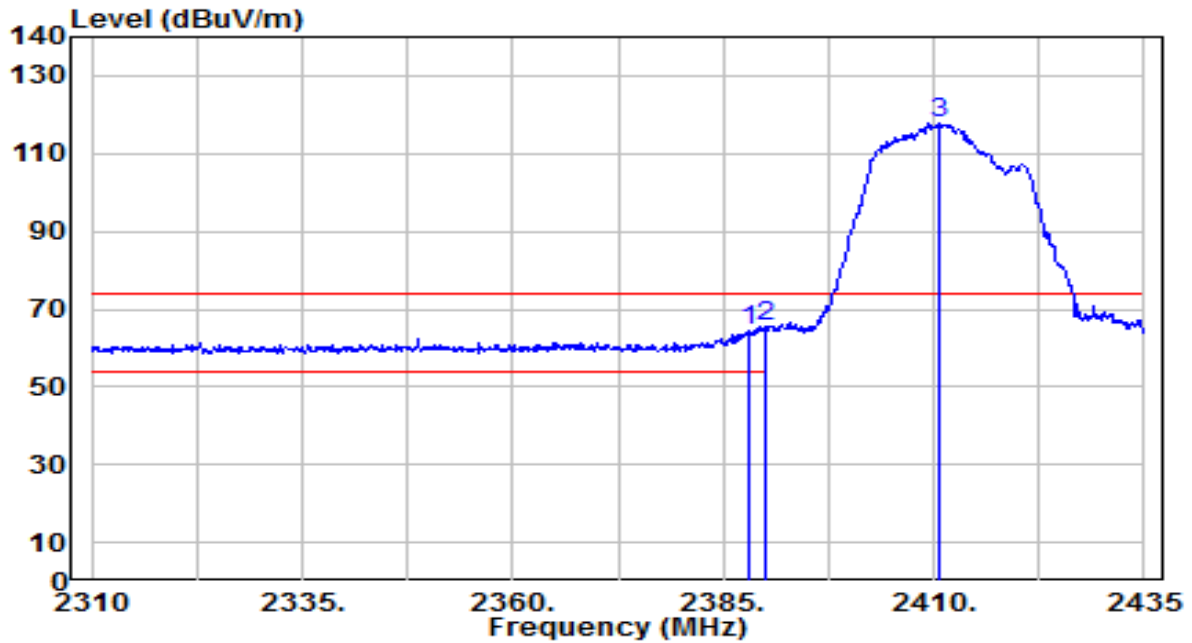


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	32.62	31.94	64.56	-9.44	74.00	130	210	Peak
2	*	2390.000	33.44	31.95	65.39	-8.61	74.00	130	210	Peak
3		2410.625	85.84	32.03	117.86	N/A	N/A	130	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

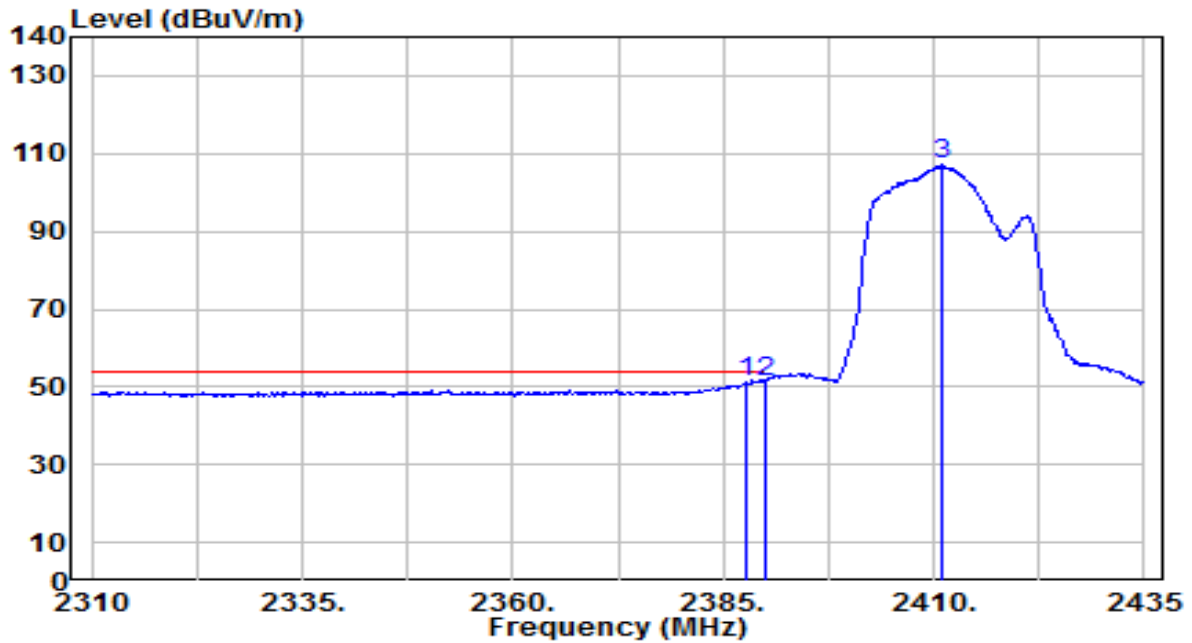


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.625	19.05	31.94	50.99	-3.01	54.00	130	210	Average
2	*	2390.000	19.41	31.95	51.35	-2.65	54.00	130	210	Average
3		2411.125	74.96	32.03	106.99	N/A	N/A	130	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

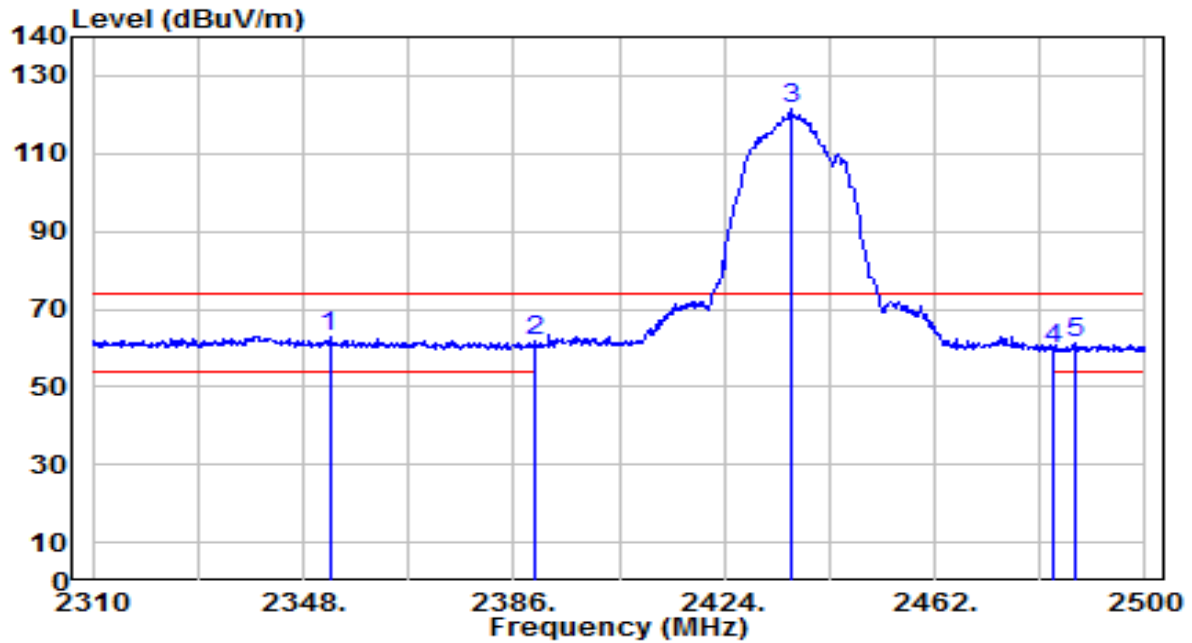


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2352.750	31.24	31.81	63.05	-10.95	74.00	180	130	Peak
2		2390.000	29.61	31.95	61.56	-12.44	74.00	180	130	Peak
3		2435.970	89.22	32.12	121.34	N/A	N/A	180	130	Peak
4		2483.500	27.23	32.30	59.53	-14.47	74.00	180	130	Peak
5		2487.460	29.13	32.31	61.44	-12.56	74.00	180	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

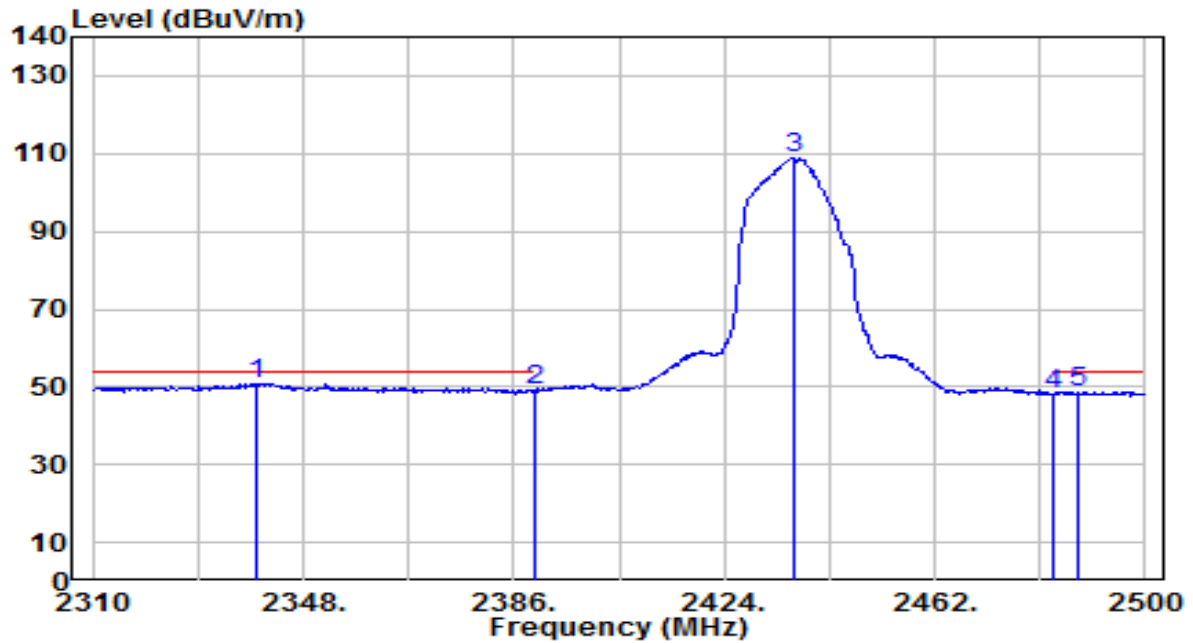


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.450	19.04	31.76	50.80	-3.20	54.00	180	130	Average
2		2390.000	17.25	31.95	49.20	-4.80	54.00	180	130	Average
3		2436.540	76.84	32.12	108.97	N/A	N/A	180	130	Average
4		2483.500	15.86	32.30	48.16	-5.84	54.00	180	130	Average
5		2488.030	16.29	32.32	48.60	-5.40	54.00	180	130	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

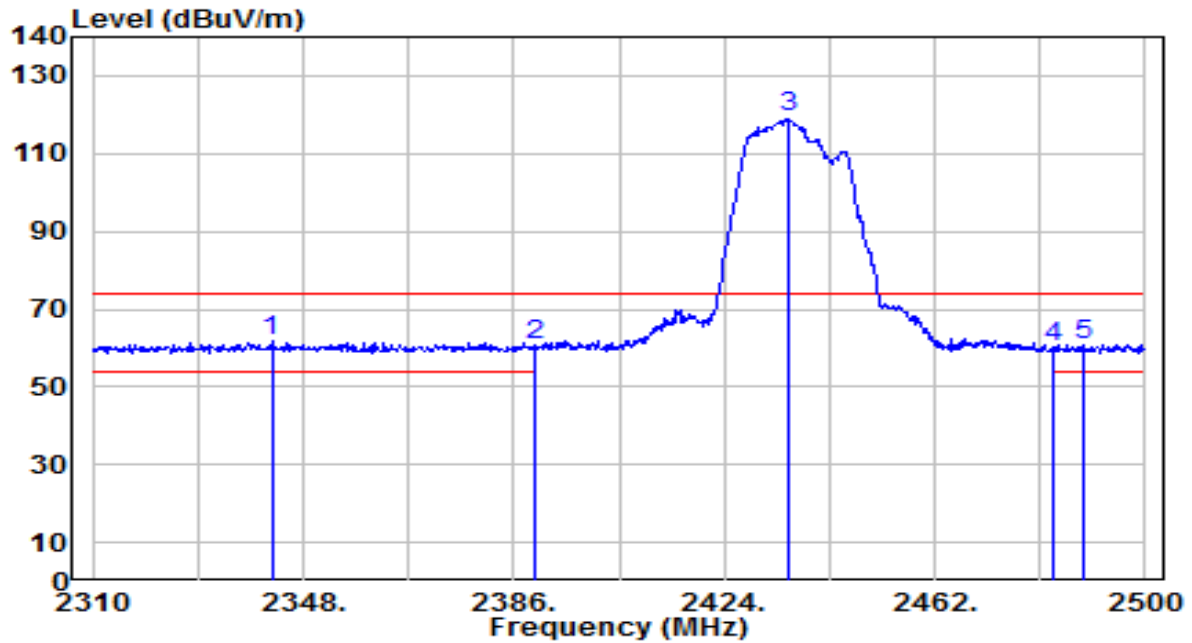


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.300	29.81	31.77	61.58	-12.42	74.00	115	210	Peak
2		2390.000	29.01	31.95	60.96	-13.04	74.00	115	210	Peak
3		2435.590	87.07	32.12	119.19	N/A	N/A	115	210	Peak
4		2483.500	28.00	32.30	60.30	-13.70	74.00	115	210	Peak
5		2488.980	28.67	32.32	60.99	-13.01	74.00	115	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

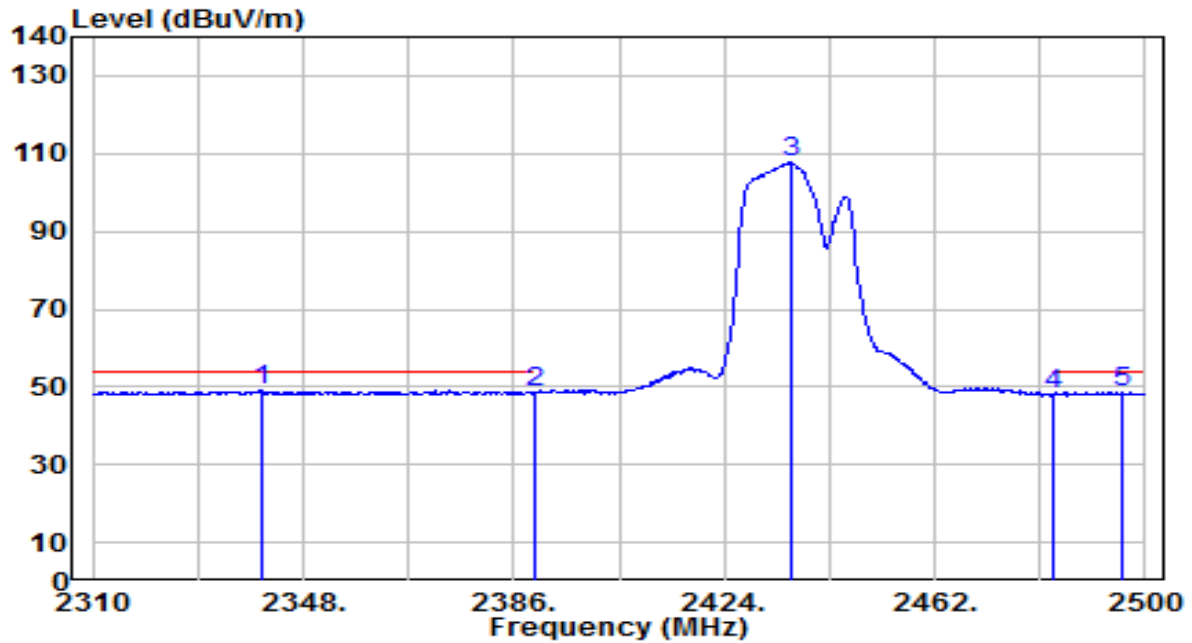


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.780	17.15	31.76	48.91	-5.09	54.00	115	210	Average
2		2390.000	16.59	31.95	48.54	-5.46	54.00	115	210	Average
3		2435.970	75.74	32.12	107.86	N/A	N/A	115	210	Average
4		2483.500	15.79	32.30	48.09	-5.91	54.00	115	210	Average
5		2495.630	16.26	32.34	48.61	-5.39	54.00	115	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

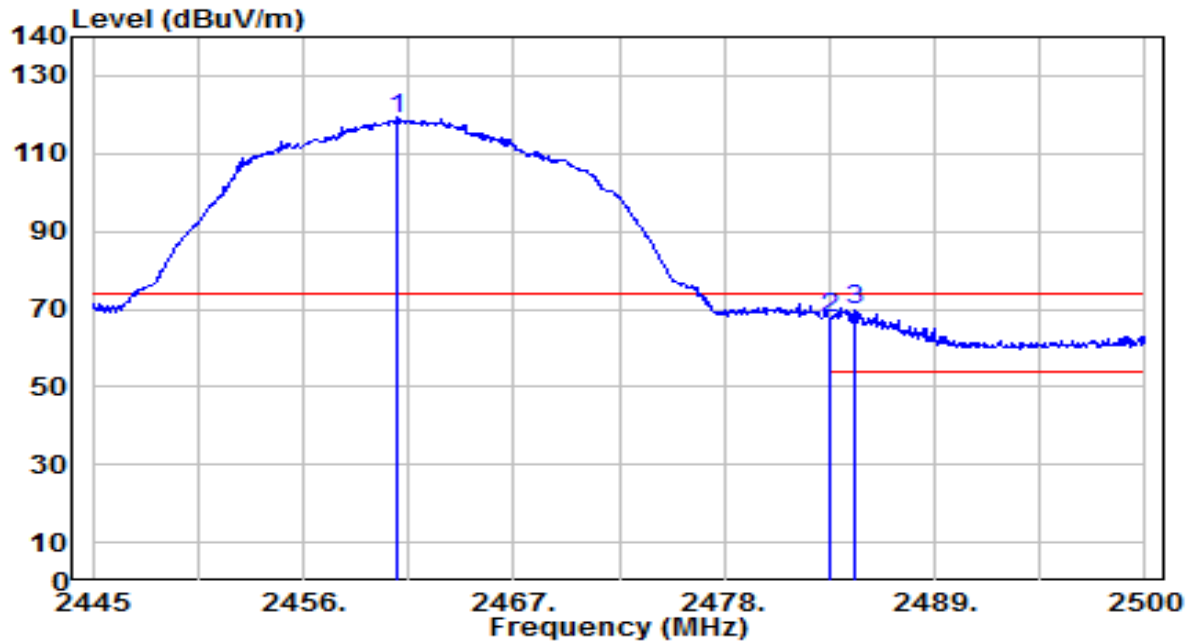


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.895	86.88	32.21	119.09	N/A	N/A	230	145	Peak
2	2483.500	35.52	32.30	67.82	-6.18	74.00	230	145	Peak
3	* 2484.820	37.59	32.30	69.90	-4.10	74.00	230	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

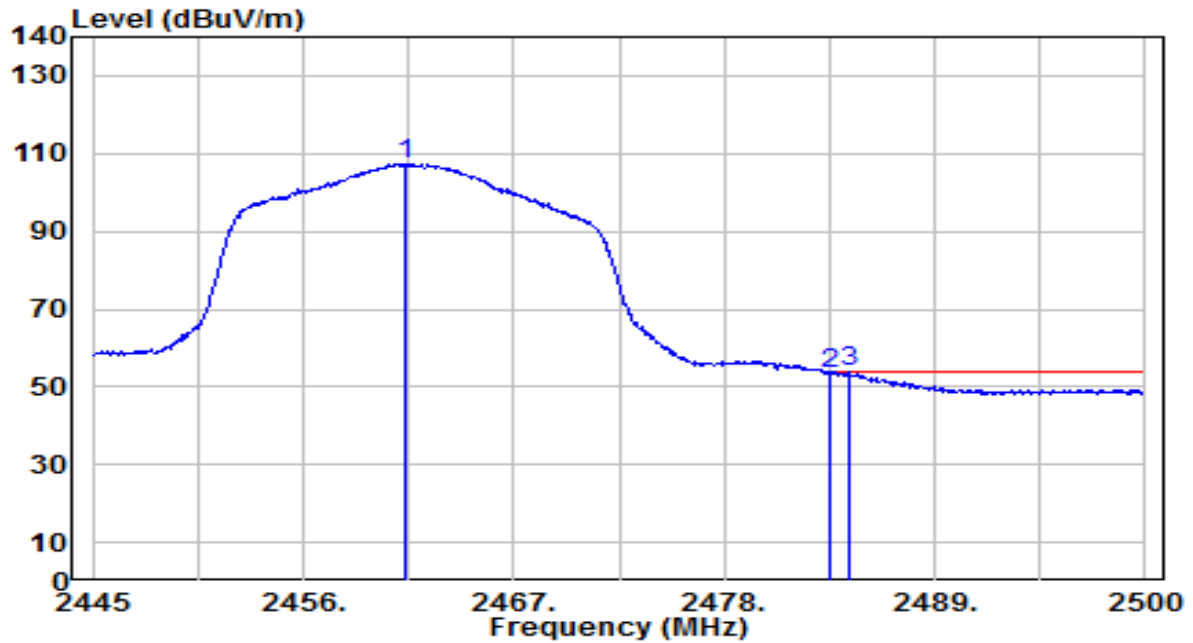


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.280	74.98	32.22	107.20	N/A	N/A	230	145	Average
2	2483.500	21.29	32.30	53.59	-0.41	54.00	230	145	Average
3	* 2484.545	21.40	32.30	53.71	-0.29	54.00	230	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

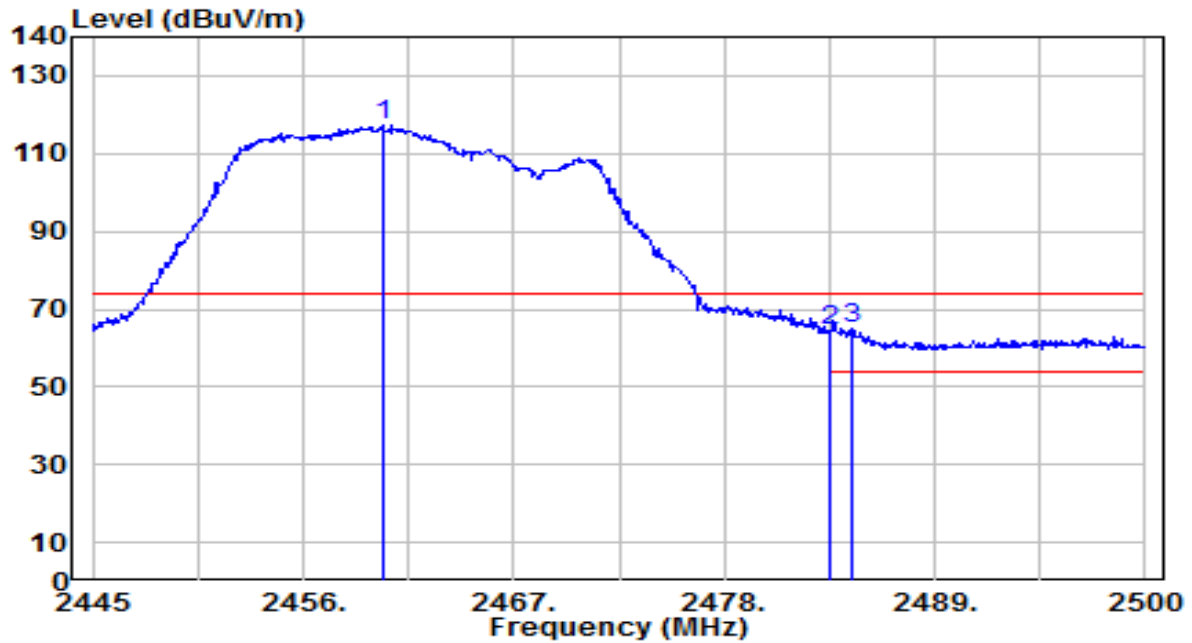


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.125	84.86	32.21	117.07	N/A	N/A	105	210	Peak
2	2483.500	31.94	32.30	64.24	-9.76	74.00	105	210	Peak
3	* 2484.710	32.64	32.30	64.95	-9.05	74.00	105	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

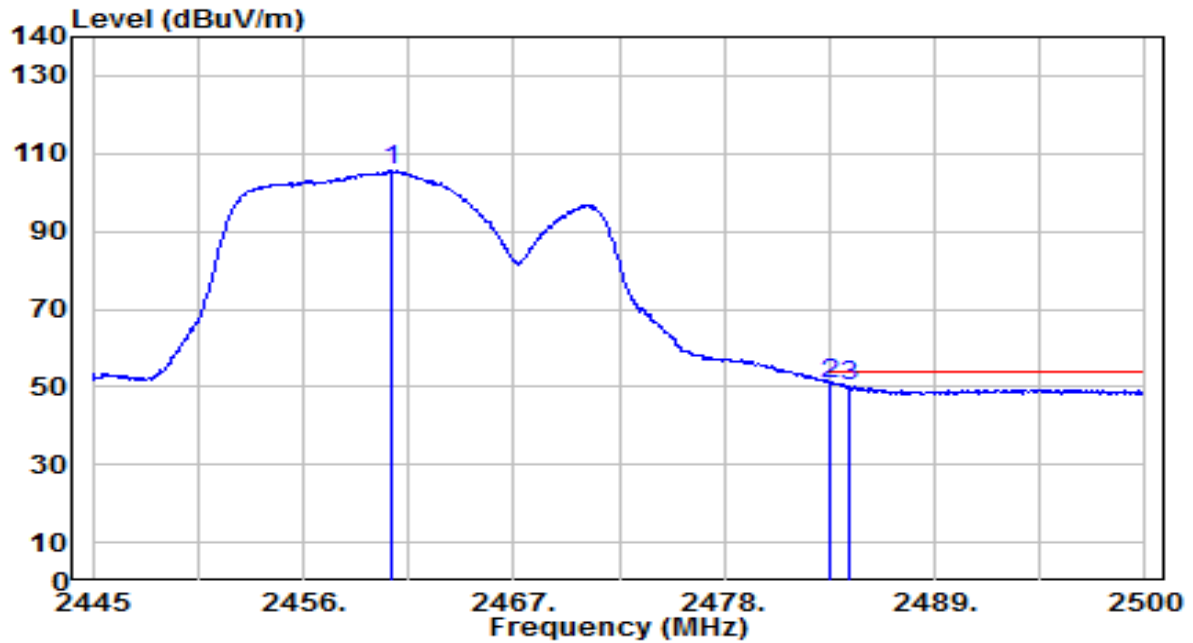


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.675	73.22	32.21	105.43	N/A	N/A	105	210	Average
2	*	2483.500	18.63	32.30	50.92	-3.08	54.00	105	210	Average
3		2484.600	17.96	32.30	50.26	-3.74	54.00	105	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

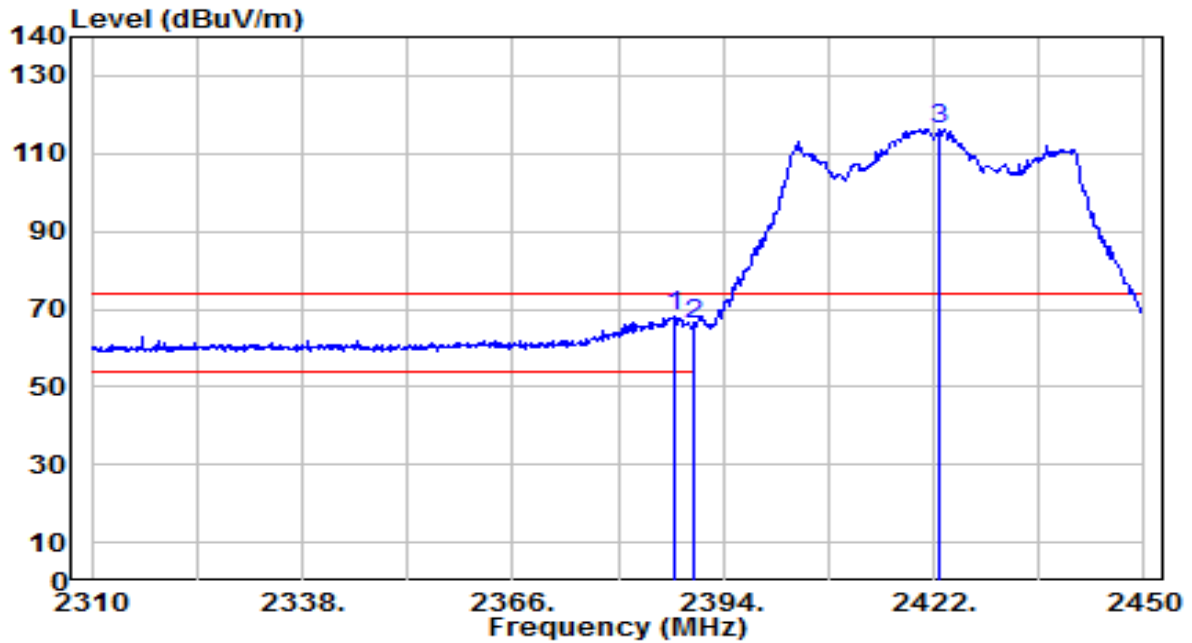


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.560	35.97	31.94	67.91	-6.09	74.00	190	145	Peak
2		2390.000	34.32	31.95	66.27	-7.73	74.00	190	145	Peak
3		2422.700	84.38	32.07	116.46	N/A	N/A	190	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

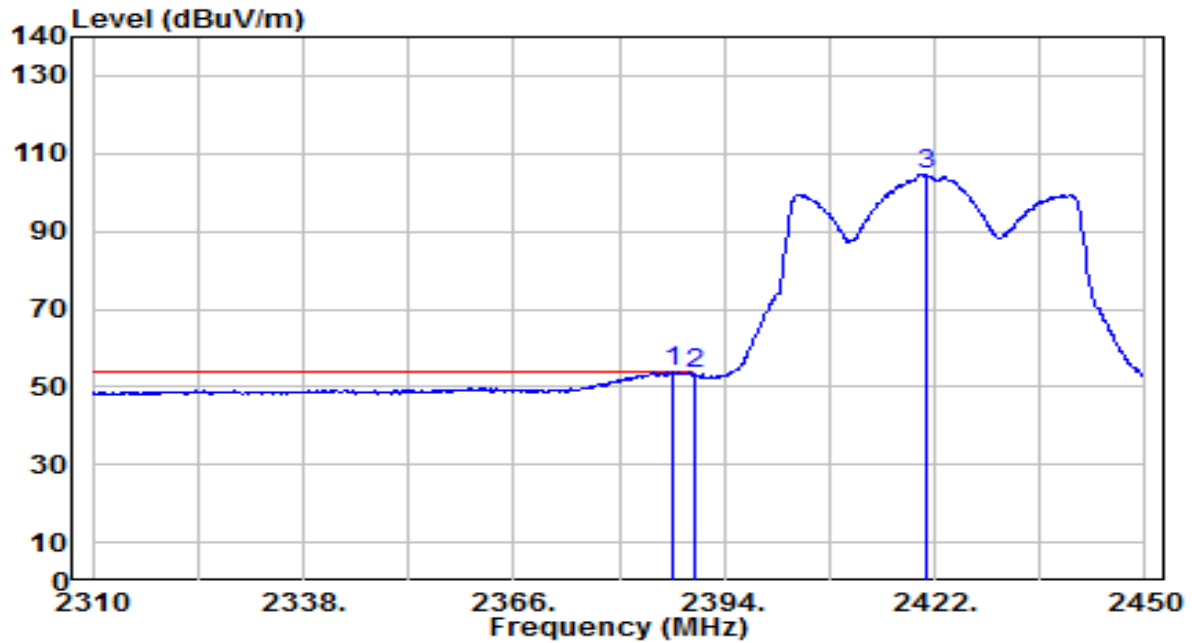


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.280	21.88	31.94	53.82	-0.18	54.00	190	145	Average
2		2390.000	21.18	31.95	53.13	-0.87	54.00	190	145	Average
3		2420.740	72.58	32.06	104.64	N/A	N/A	190	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

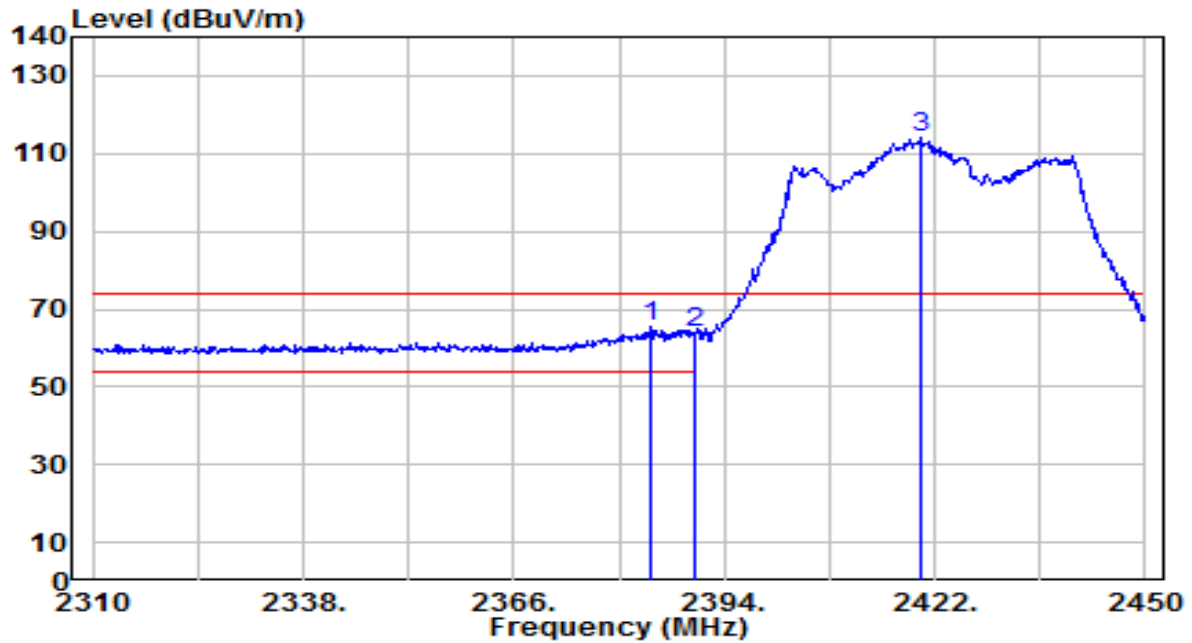


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.060	33.40	31.93	65.32	-8.68	74.00	130	210	Peak
2		2390.000	31.93	31.95	63.88	-10.12	74.00	130	210	Peak
3		2420.040	82.14	32.06	114.20	N/A	N/A	130	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

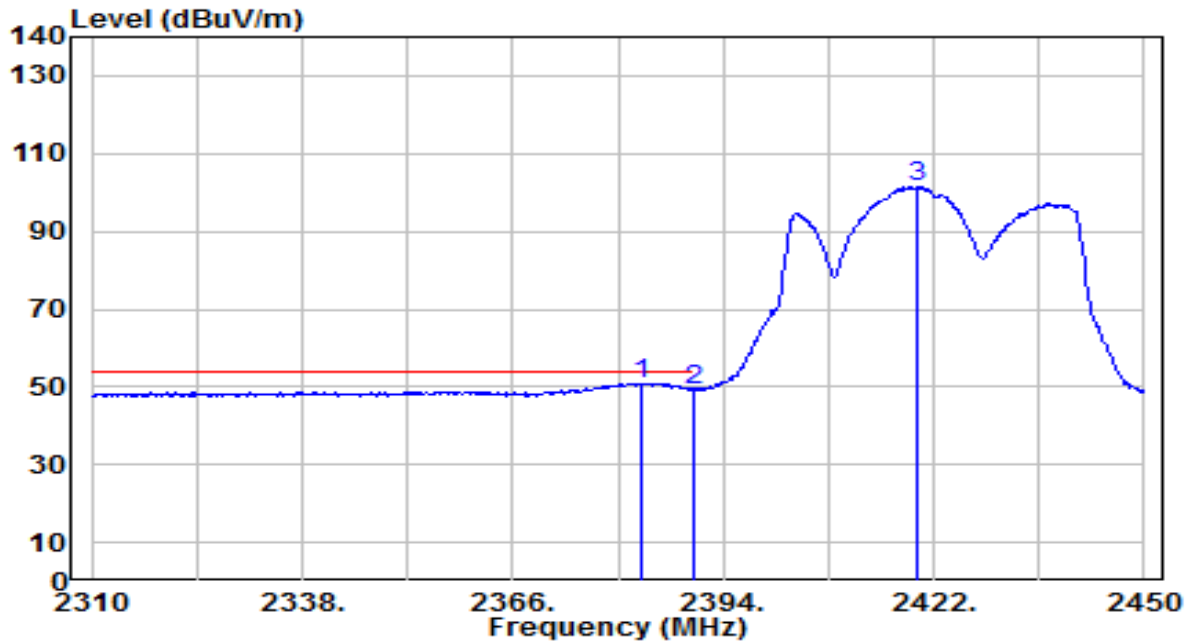


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.220	19.01	31.92	50.94	-3.06	54.00	130	210	Average
2		2390.000	17.36	31.95	49.31	-4.69	54.00	130	210	Average
3		2419.760	69.40	32.06	101.46	N/A	N/A	130	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

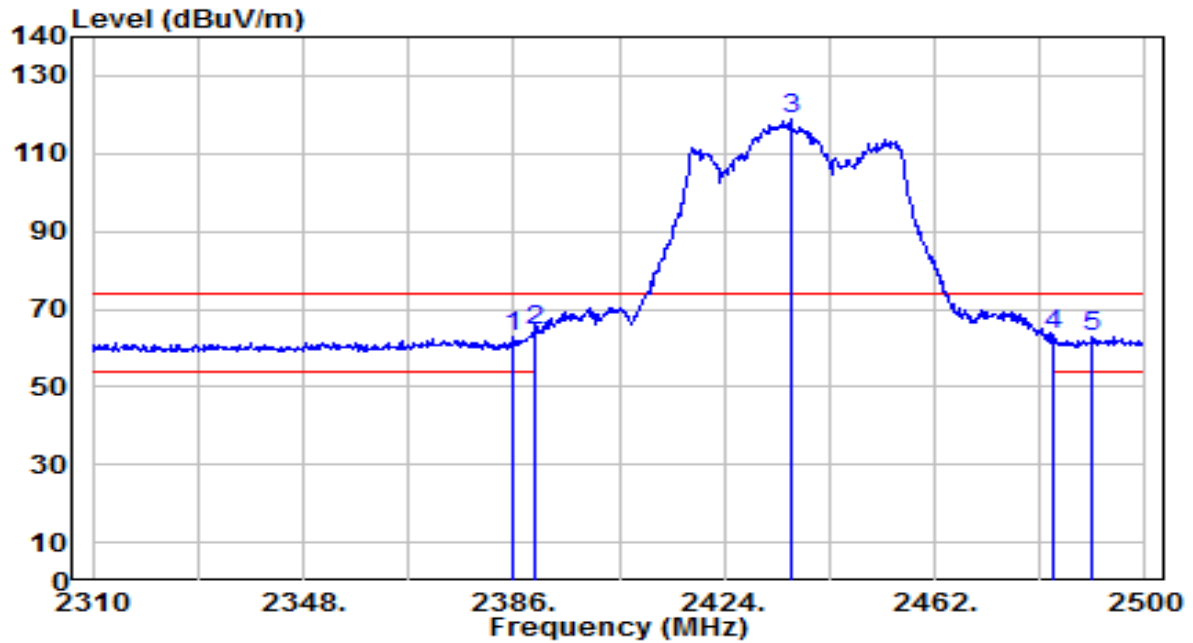


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.000	30.74	31.93	62.67	-11.33	74.00	180	130	Peak
2	*	2390.000	32.32	31.95	64.26	-9.74	74.00	180	130	Peak
3		2436.160	86.63	32.12	118.75	N/A	N/A	180	130	Peak
4		2483.500	30.99	32.30	63.29	-10.71	74.00	180	130	Peak
5		2490.500	30.79	32.32	63.11	-10.89	74.00	180	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

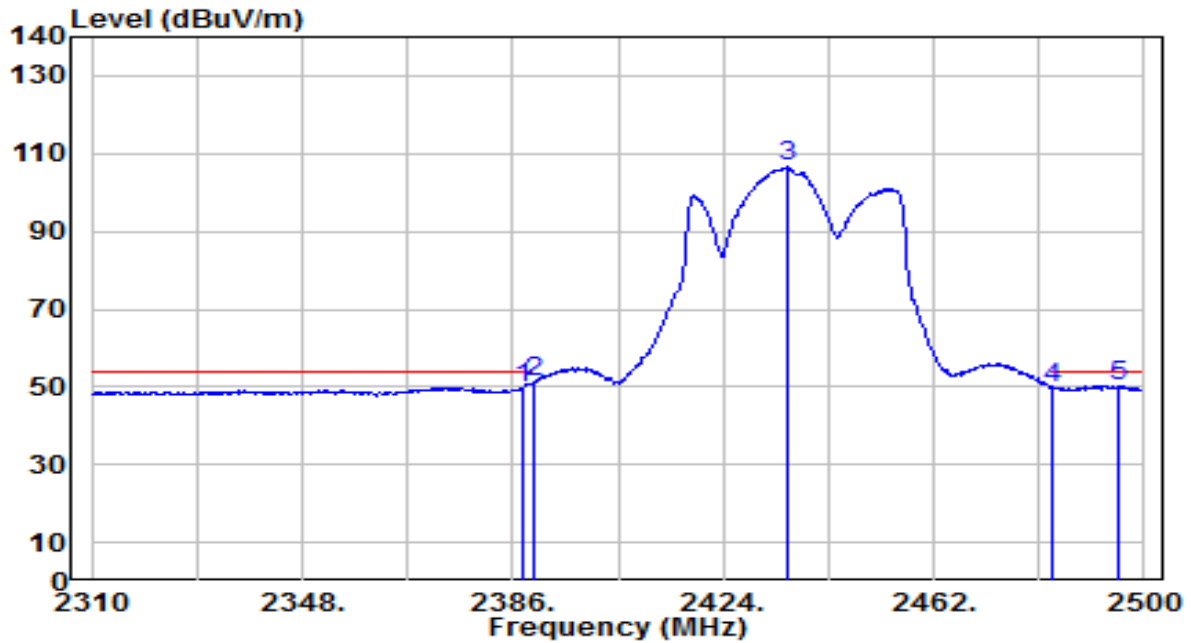


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.900	17.97	31.94	49.91	-4.09	54.00	180	130	Average
2	*	2390.000	19.31	31.95	51.26	-2.74	54.00	180	130	Average
3		2435.400	74.44	32.12	106.56	N/A	N/A	180	130	Average
4		2483.500	17.61	32.30	49.91	-4.09	54.00	180	130	Average
5		2495.440	17.92	32.34	50.27	-3.73	54.00	180	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

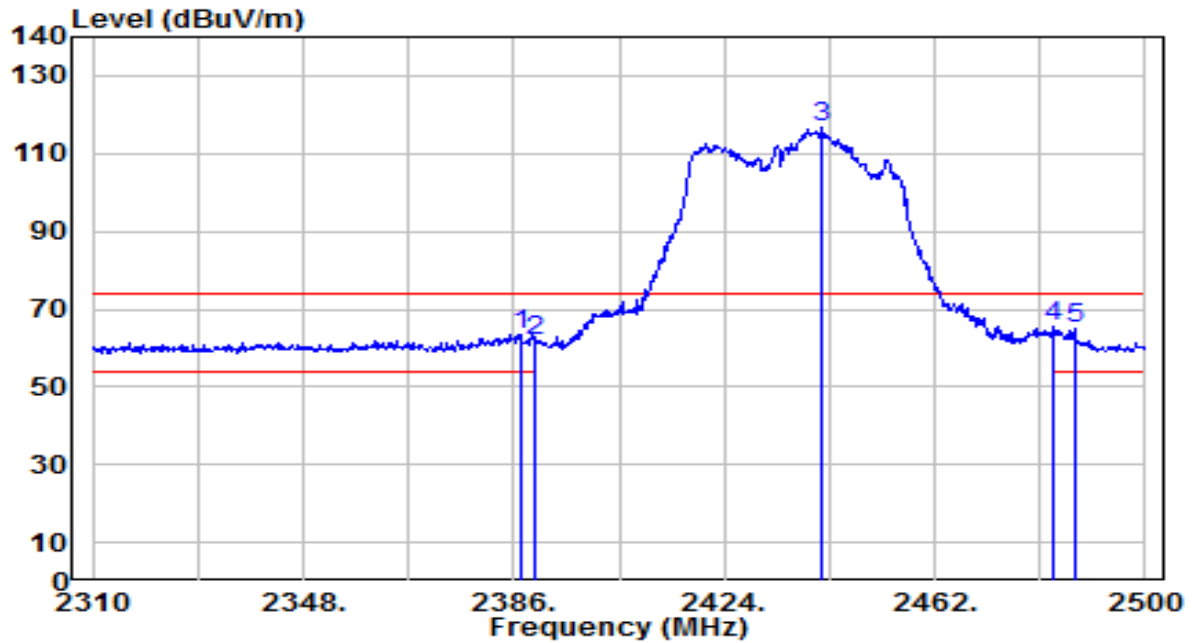


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	31.32	31.94	63.26	-10.74	74.00	115	210	Peak
2	2390.000	29.80	31.95	61.75	-12.25	74.00	115	210	Peak
3	2441.480	84.39	32.14	116.53	N/A	N/A	115	210	Peak
4	* 2483.500	33.05	32.30	65.35	-8.65	74.00	115	210	Peak
5	2487.270	32.88	32.31	65.19	-8.81	74.00	115	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

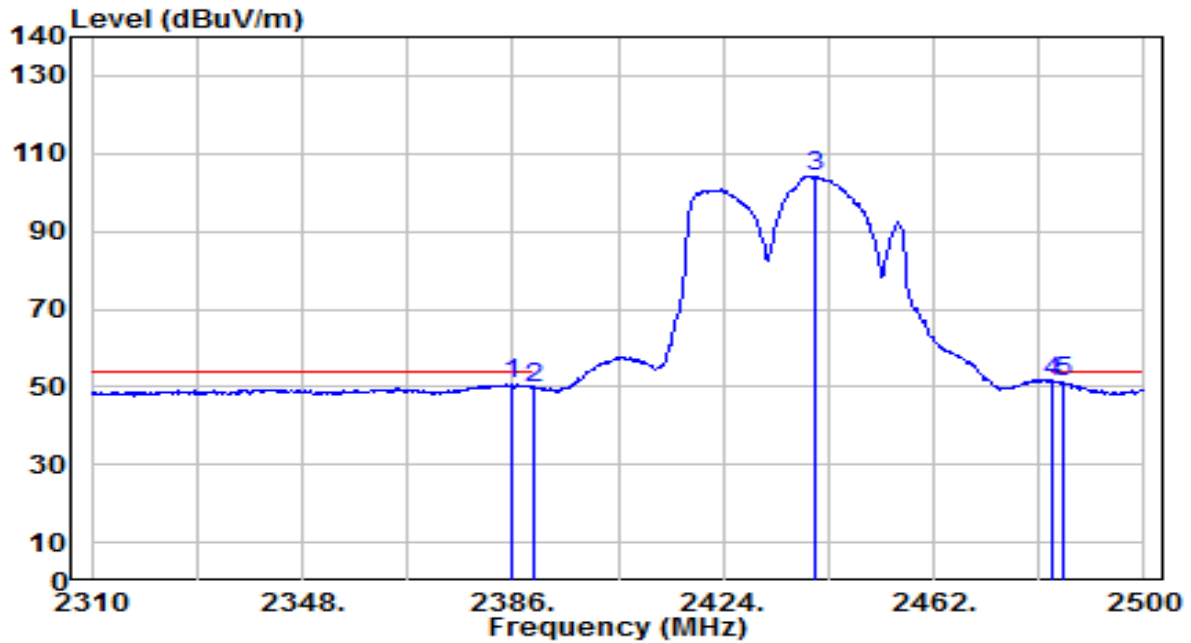


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	18.64	31.93	50.58	-3.42	54.00	115	210	Average
2	2390.000	17.74	31.95	49.69	-4.31	54.00	115	210	Average
3	2440.530	72.15	32.14	104.29	N/A	N/A	115	210	Average
4	* 2483.500	19.18	32.30	51.48	-2.52	54.00	115	210	Average
5	2485.180	18.83	32.30	51.13	-2.87	54.00	115	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

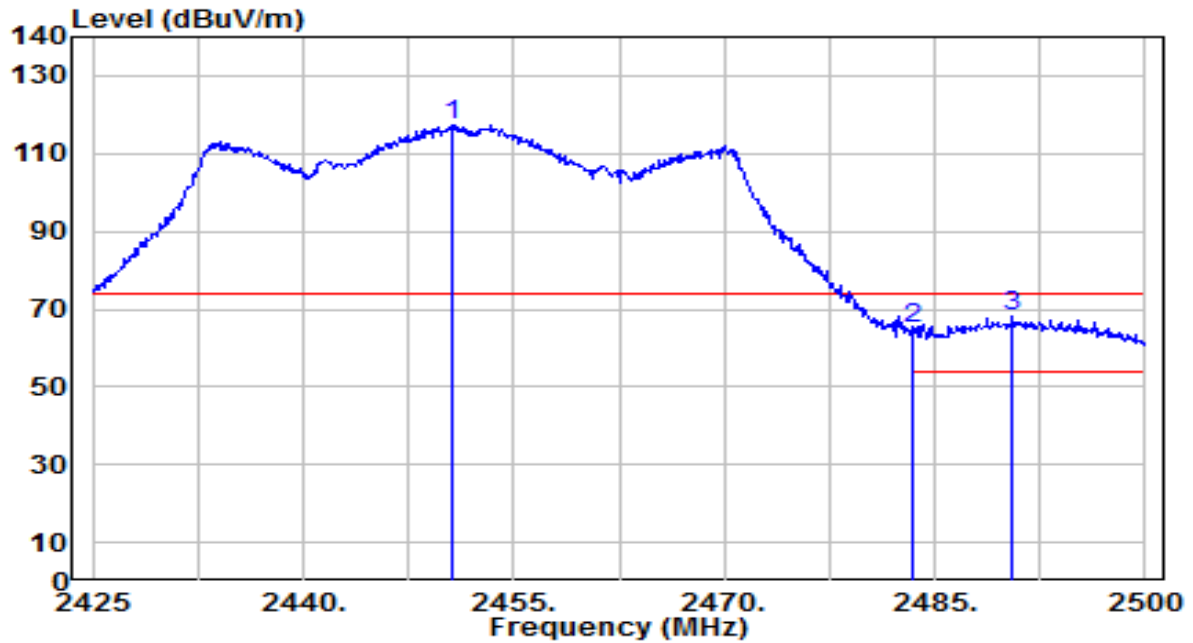


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.650	85.14	32.18	117.31	N/A	N/A	230	145	Peak
2	2483.500	32.42	32.30	64.72	-9.28	74.00	230	145	Peak
3	* 2490.475	35.64	32.32	67.96	-6.04	74.00	230	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

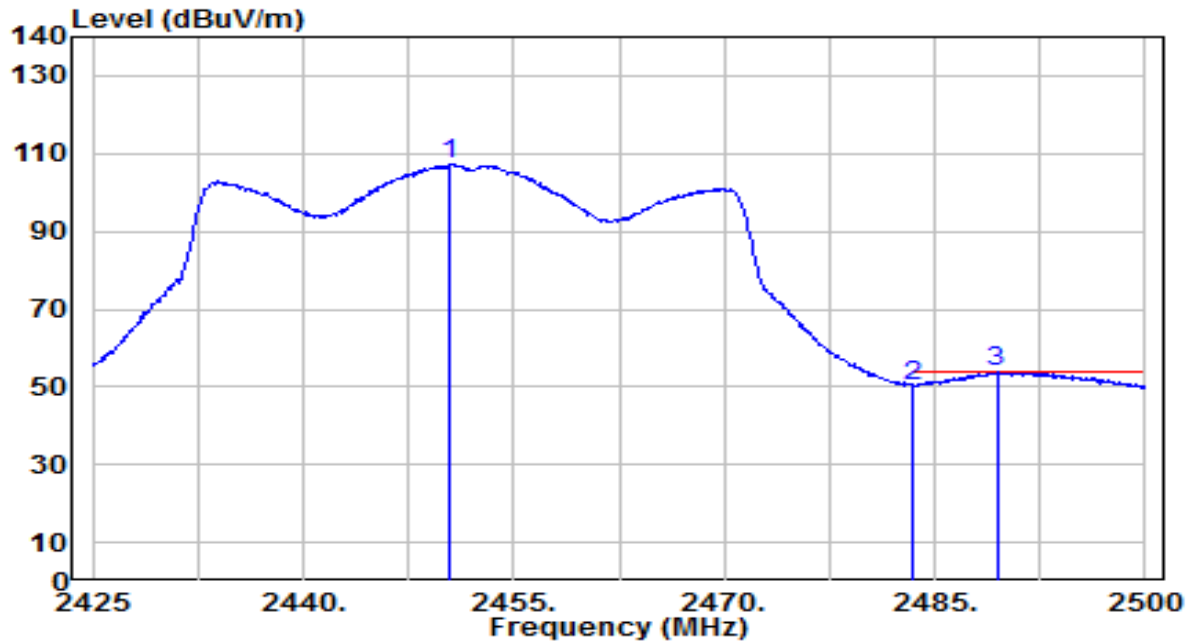


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.500	74.98	32.17	107.16	N/A	N/A	230	145	Average
2	2483.500	18.02	32.30	50.32	-3.68	54.00	230	145	Average
3	* 2489.425	21.38	32.32	53.70	-0.30	54.00	230	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

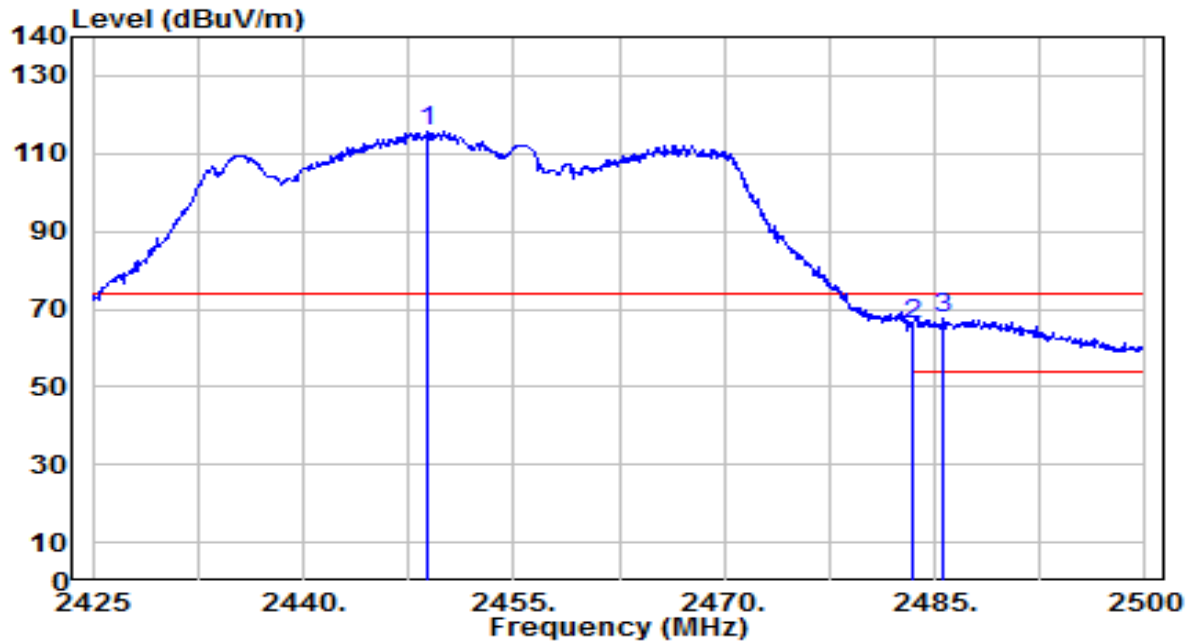


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.775	83.55	32.17	115.72	N/A	N/A	105	210	Peak
2	2483.500	33.61	32.30	65.91	-8.09	74.00	105	210	Peak
3	* 2485.675	35.12	32.31	67.43	-6.57	74.00	105	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-10
Factor	BBHA 9120D	Temp. / Humidity	22°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

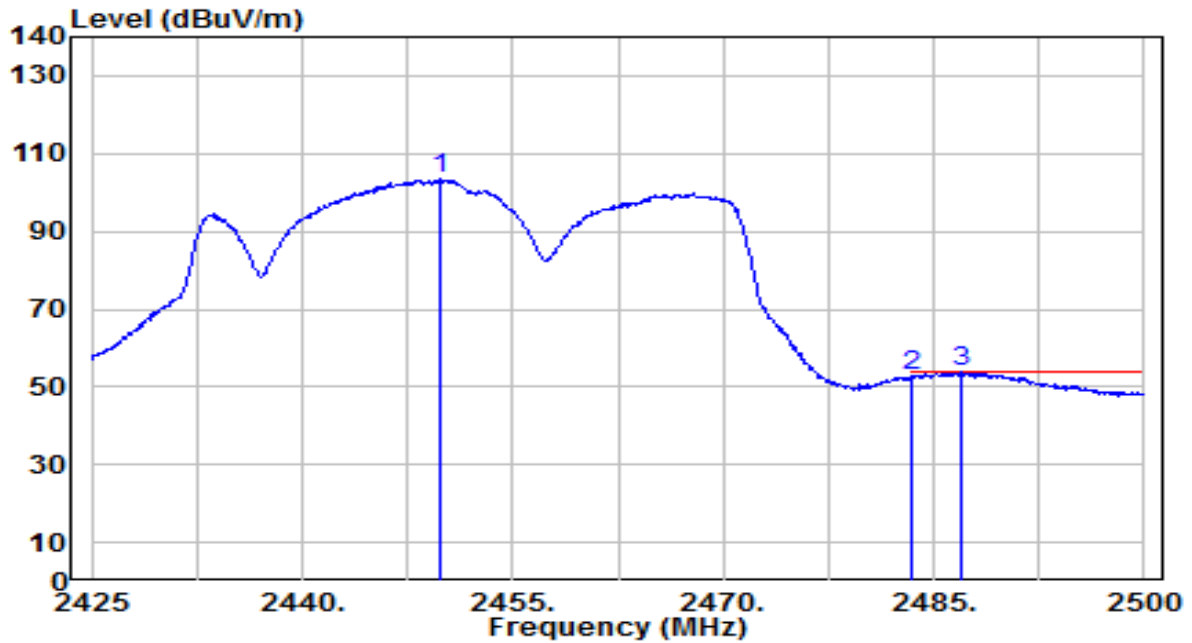

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.900	71.19	32.17	103.36	N/A	N/A	105	210	Average
2	2483.500	20.33	32.30	52.63	-1.37	54.00	105	210	Average
3	* 2486.950	21.36	32.31	53.67	-0.33	54.00	105	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

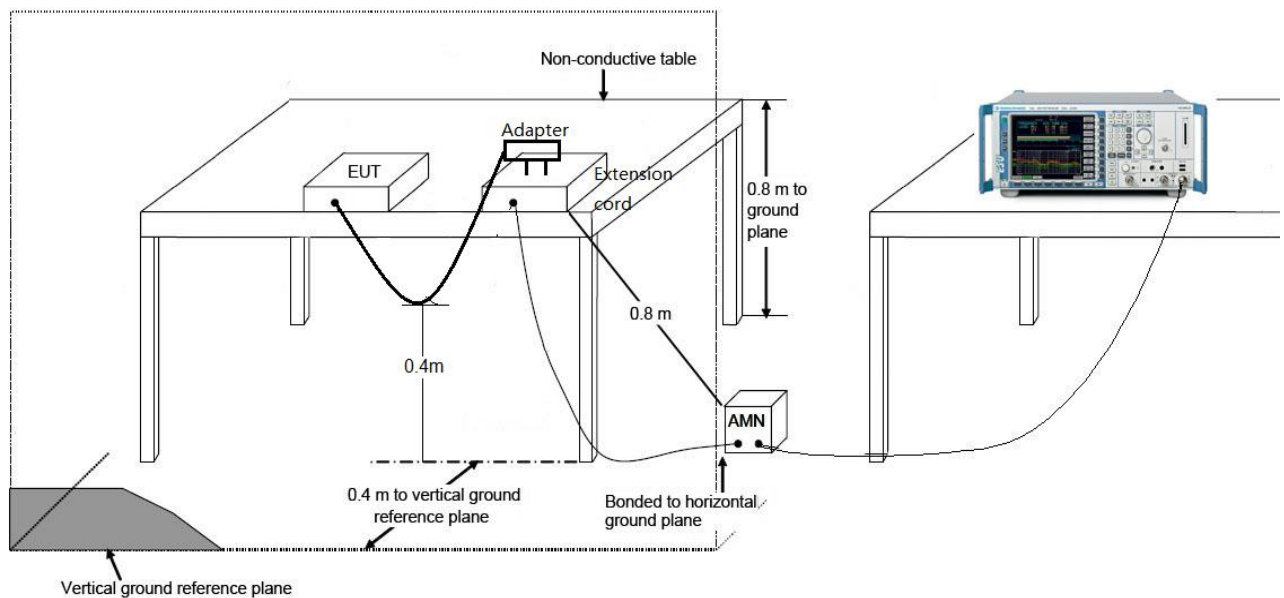

7.8.3.Test Result

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-07
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.2°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

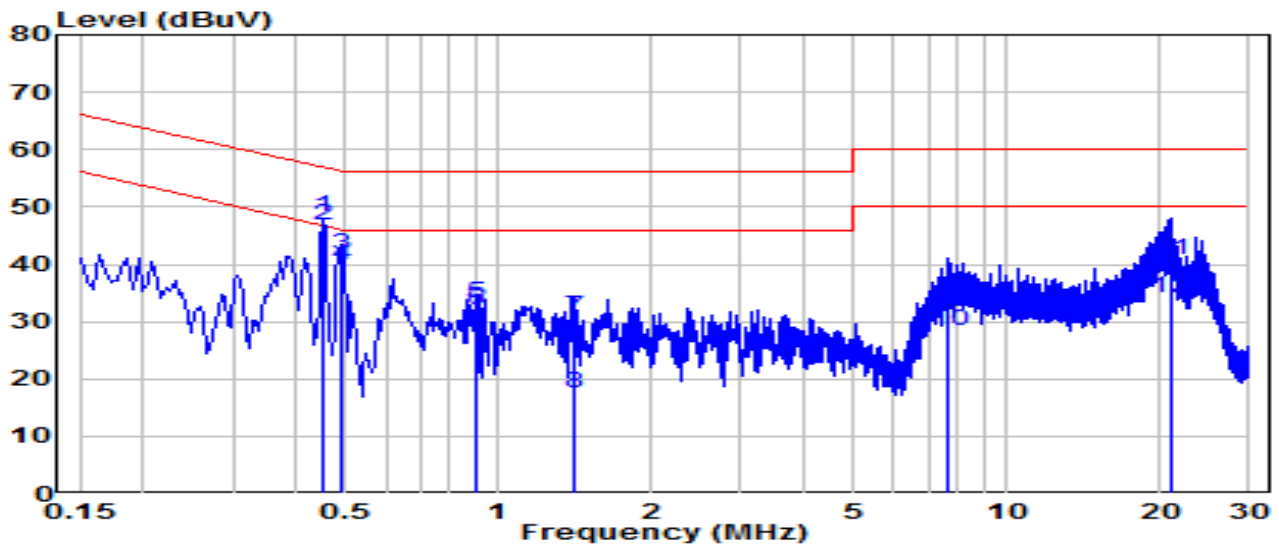

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.451	38.71	9.65	48.35	-8.49	56.85	QP
2	*	0.451	37.17	9.65	46.81	-0.03	46.85	Average
3		0.487	32.12	9.65	41.77	-14.44	56.21	QP
4		0.487	30.32	9.65	39.97	-6.24	46.21	Average
5		0.906	23.66	9.67	33.33	-22.67	56.00	QP
6		0.906	22.27	9.67	31.95	-14.05	46.00	Average
7		1.410	21.21	9.69	30.90	-25.10	56.00	QP
8		1.410	7.73	9.69	17.42	-28.58	46.00	Average
9		7.642	24.38	9.81	34.19	-25.81	60.00	QP
10		7.642	18.59	9.81	28.41	-21.59	50.00	Average
11		20.969	30.73	9.94	40.66	-19.34	60.00	QP
12		20.969	24.24	9.94	34.18	-15.82	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).