


EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

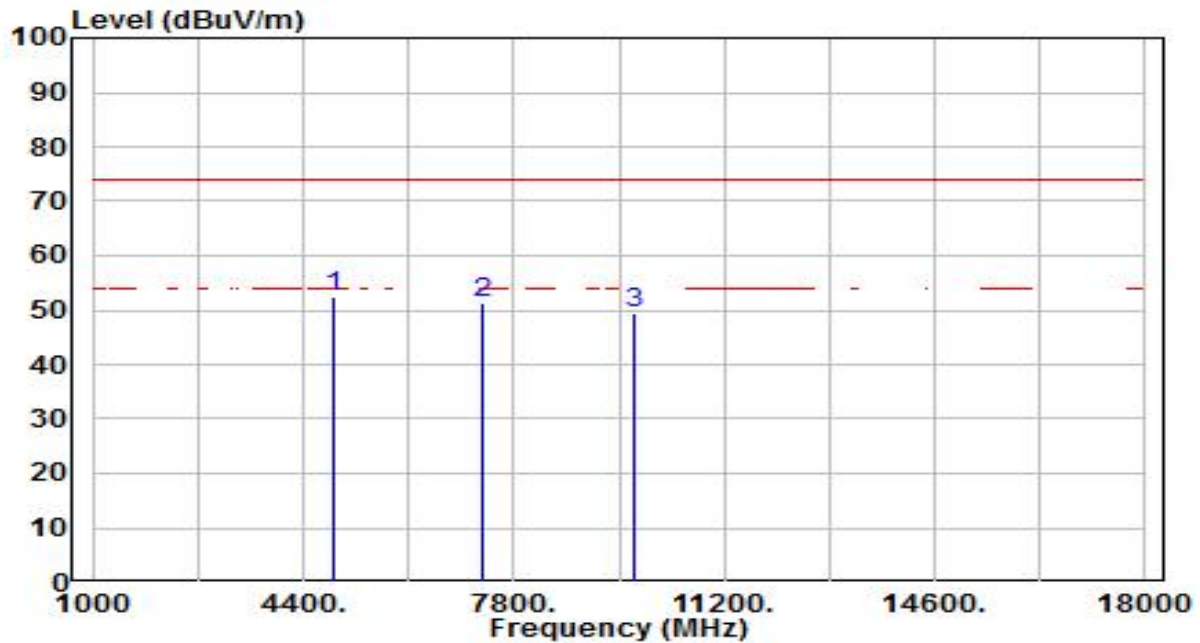


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	48.62	3.84	52.46	-21.54	74.00	200	85	Peak
2		7311.000	39.43	11.94	51.38	-22.62	74.00	200	258	Peak
3		9748.000	33.36	15.95	49.31	-24.69	74.00	200	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

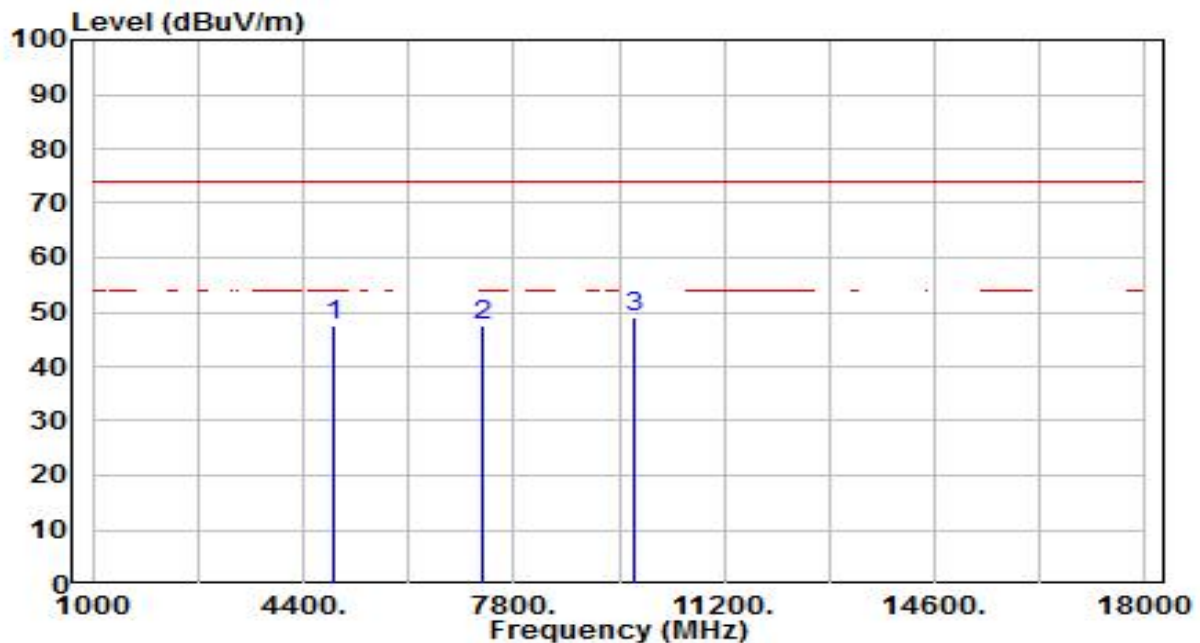


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.62	3.84	47.46	-26.54	74.00	200	327	Peak
2	7311.000	35.73	11.94	47.67	-26.33	74.00	200	286	Peak
3	* 9748.000	32.96	15.95	48.91	-25.09	74.00	200	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

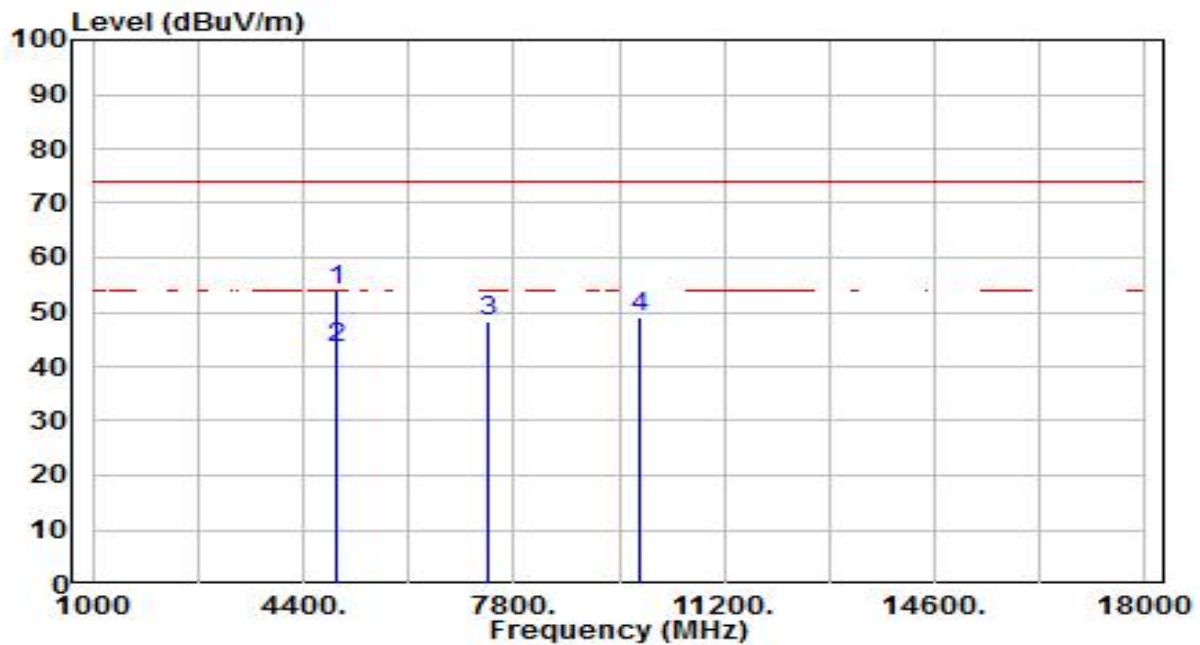


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	49.91	3.92	53.83	-20.17	74.00	200	86	Peak
2	*	4924.000	39.50	3.92	43.42	-10.58	54.00	200	86	Average
3		7386.000	36.12	12.21	48.33	-25.67	74.00	200	305	Peak
4		9848.000	32.83	16.14	48.97	-25.03	74.00	200	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

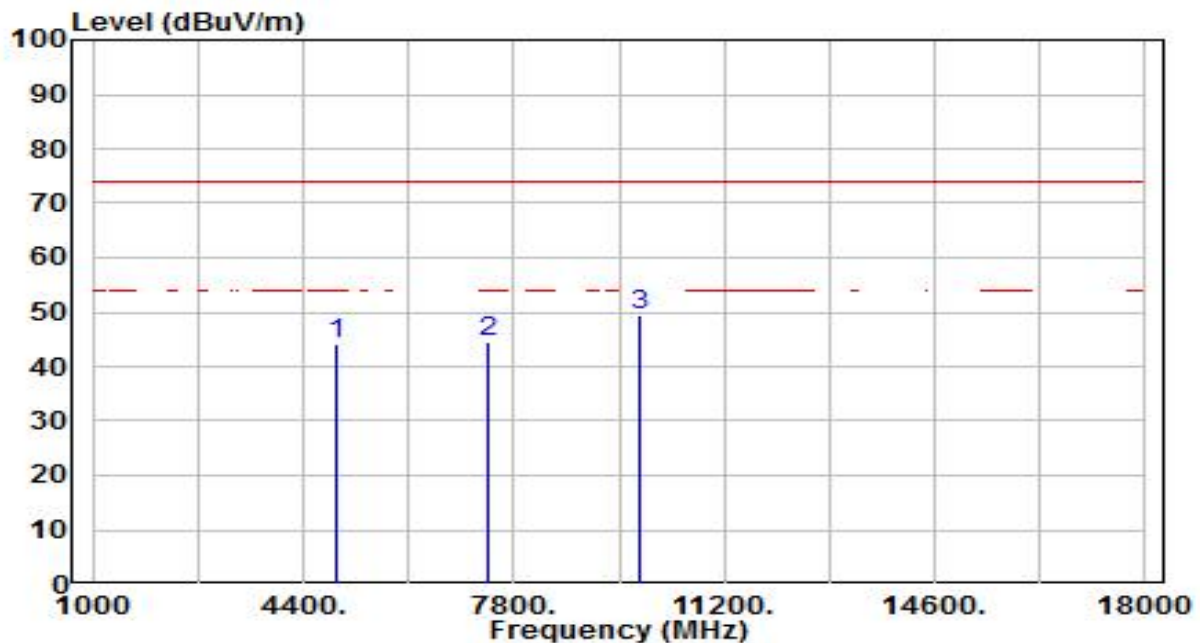


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.26	3.92	44.18	-29.82	74.00	200	149	Peak
2	7386.000	32.32	12.21	44.53	-29.47	74.00	200	31	Peak
3	* 9848.000	33.28	16.14	49.42	-24.58	74.00	200	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

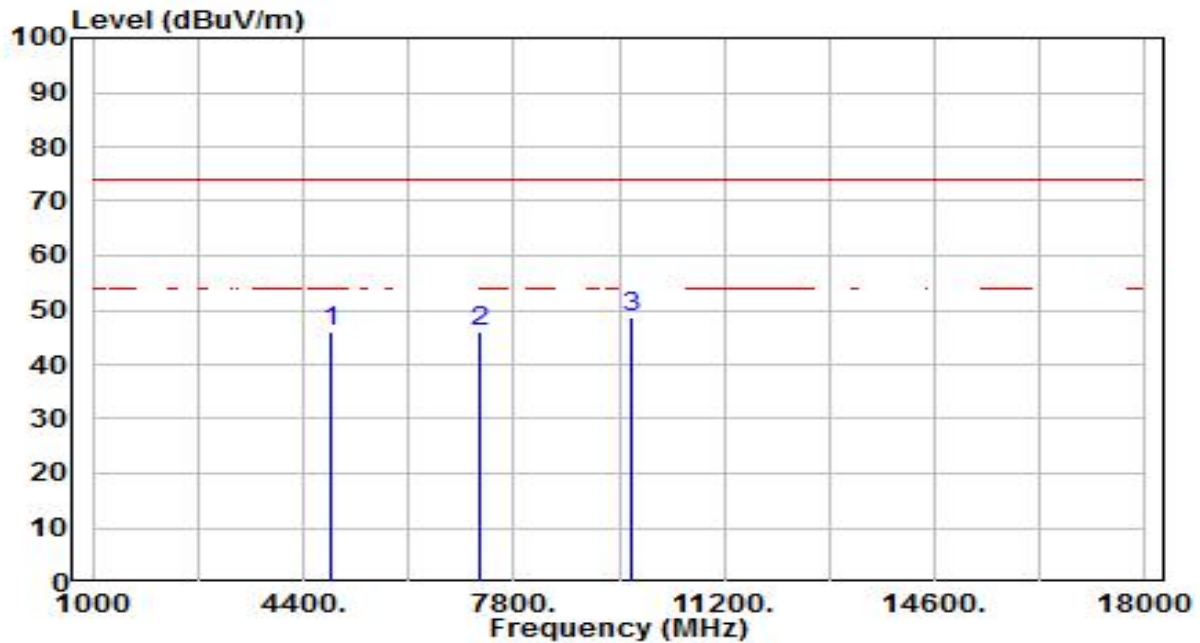


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	42.30	3.78	46.08	-27.92	74.00	200	273	Peak
2	7266.000	34.15	11.78	45.93	-28.07	74.00	200	308	Peak
3	* 9688.000	32.84	15.84	48.69	-25.31	74.00	200	166	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

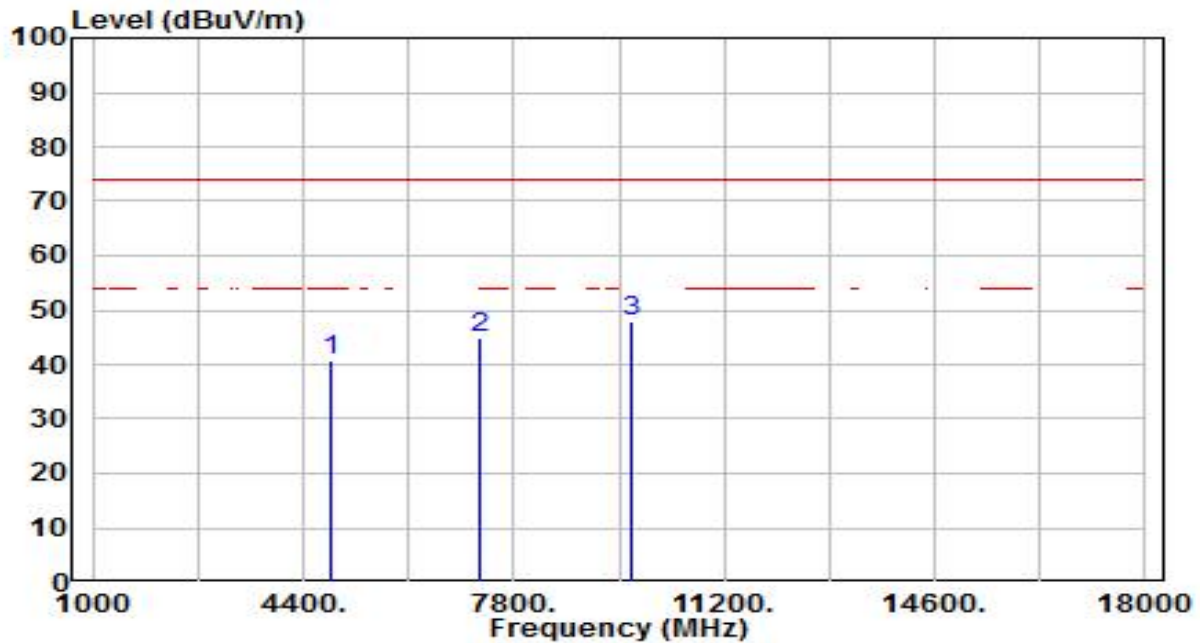


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	36.99	3.78	40.77	-33.23	74.00	200	152	Peak
2	7266.000	33.22	11.78	45.00	-29.00	74.00	200	228	Peak
3	* 9688.000	31.95	15.84	47.79	-26.21	74.00	200	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

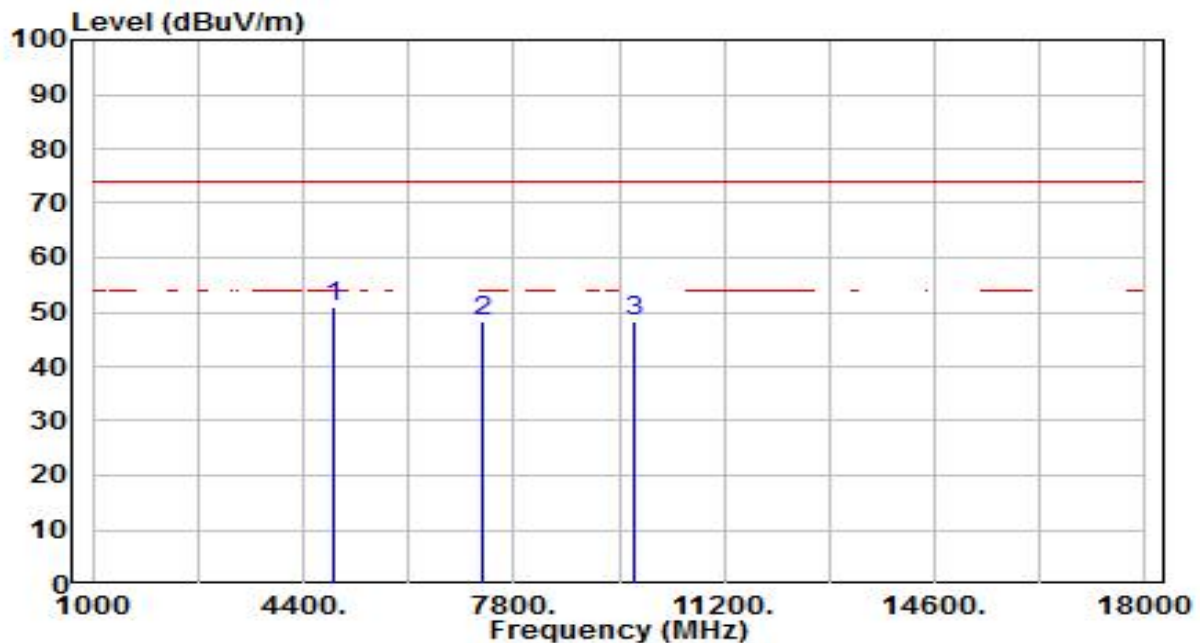


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	47.21	3.84	51.05	-22.95	74.00	200	269	Peak
2		7311.000	36.29	11.94	48.23	-25.77	74.00	200	256	Peak
3		9748.000	32.27	15.95	48.22	-25.78	74.00	200	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

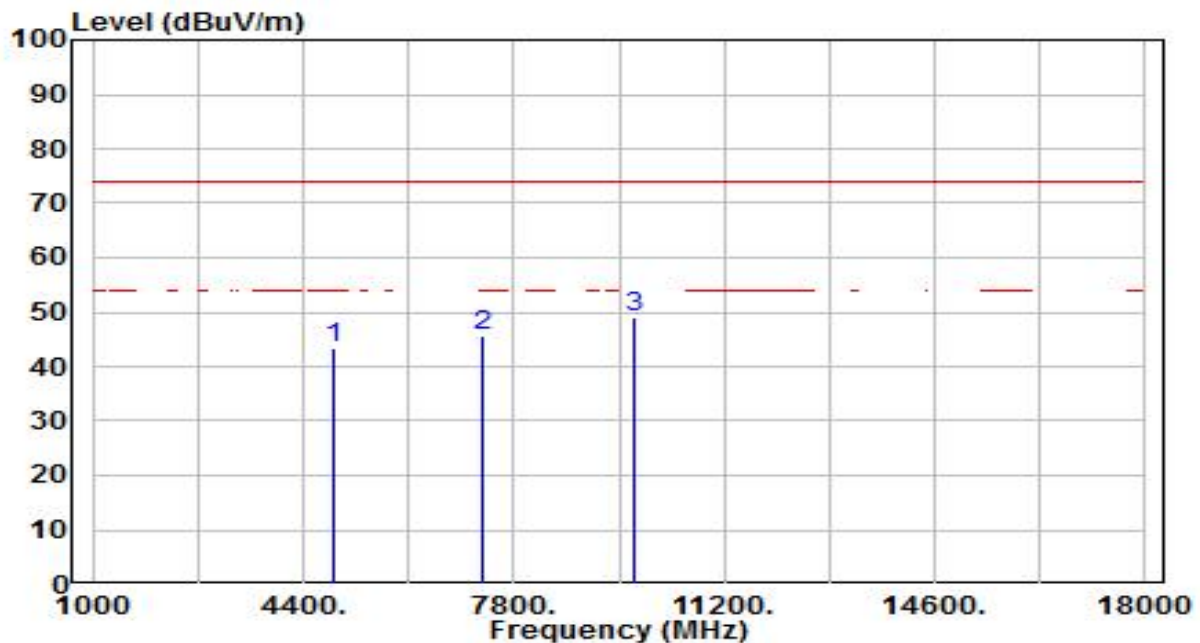


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.71	3.84	43.55	-30.45	74.00	200	152	Peak
2	7311.000	33.76	11.94	45.70	-28.30	74.00	200	173	Peak
3	* 9748.000	33.06	15.95	49.01	-24.99	74.00	200	229	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

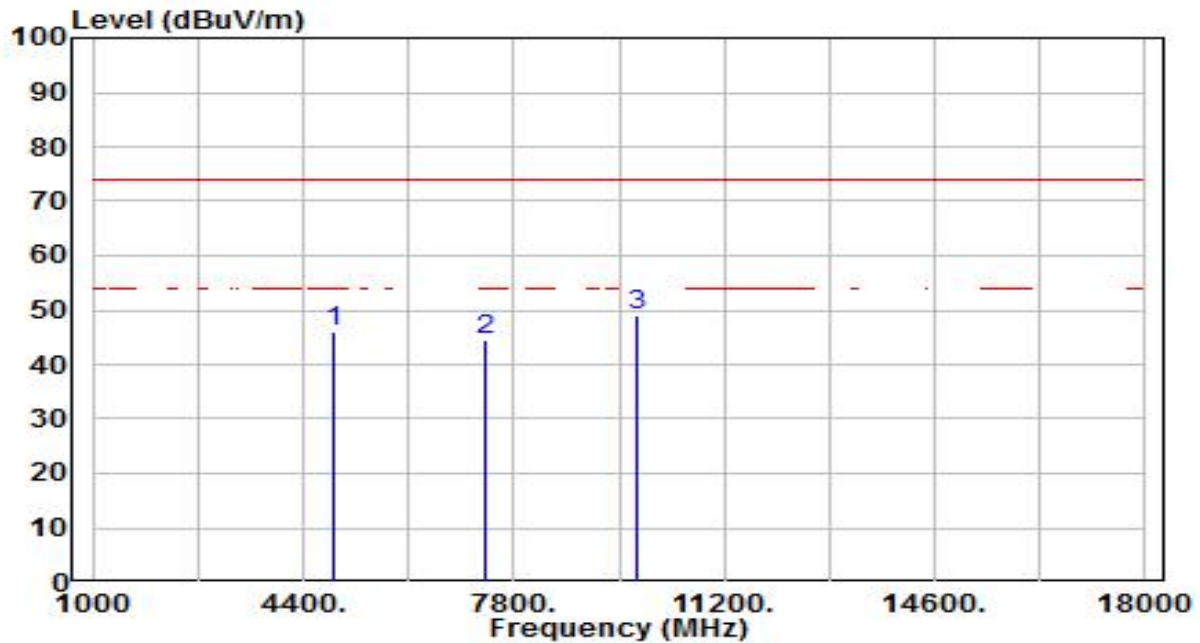


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	42.13	3.89	46.01	-27.99	74.00	200	104	Peak
2	7356.000	32.44	12.10	44.54	-29.46	74.00	200	93	Peak
3	* 9808.000	32.94	16.06	49.00	-25.00	74.00	200	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

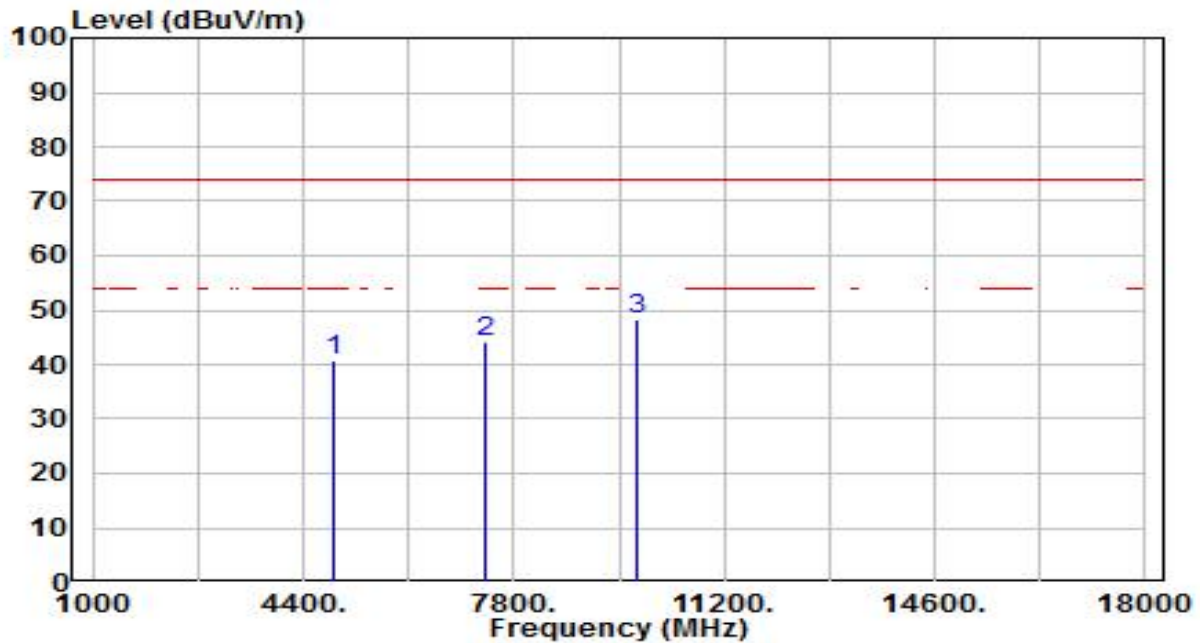


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	36.89	3.89	40.78	-33.22	74.00	200	122	Peak
2	7356.000	31.87	12.10	43.97	-30.03	74.00	200	52	Peak
3	* 9808.000	32.39	16.06	48.45	-25.55	74.00	200	323	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

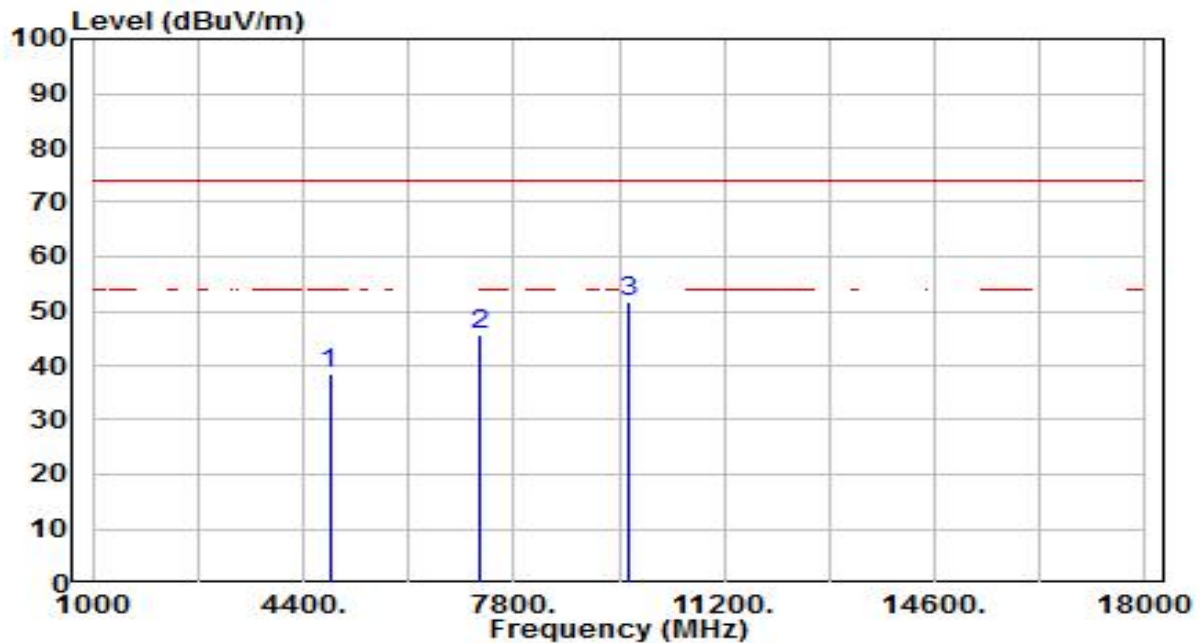


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.58	3.75	38.32	-35.68	74.00	200	244	Peak
2	7236.000	34.13	11.68	45.80	-28.20	74.00	200	125	Peak
3	* 9648.000	35.79	15.77	51.55	-22.45	74.00	200	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

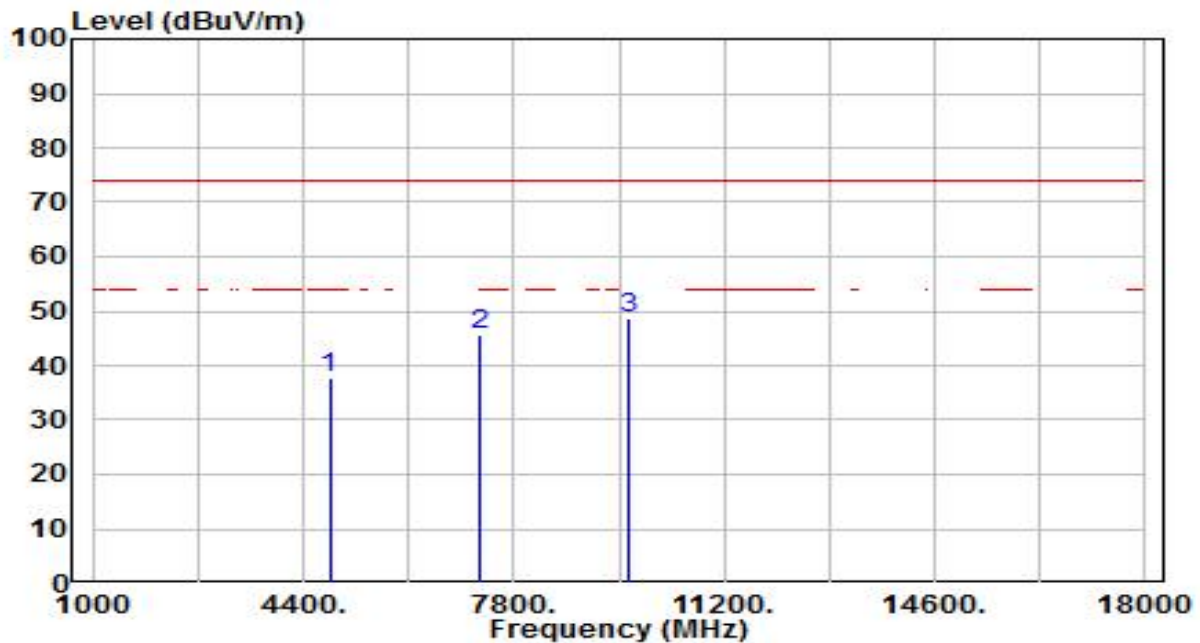


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.91	3.75	37.65	-36.35	74.00	200	137	Peak
2	7236.000	34.13	11.68	45.80	-28.20	74.00	200	2	Peak
3	* 9648.000	33.03	15.77	48.80	-25.20	74.00	200	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

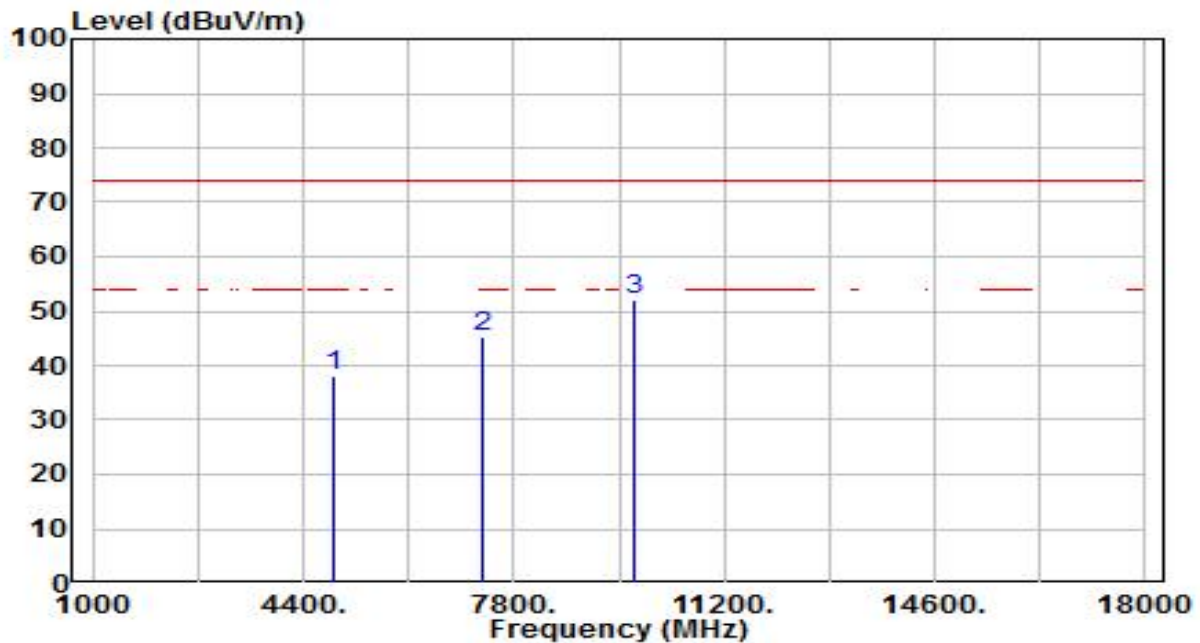


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.45	3.84	38.28	-35.72	74.00	200	110	Peak
2	7311.000	33.19	11.94	45.13	-28.87	74.00	200	44	Peak
3	* 9748.000	36.28	15.95	52.23	-21.77	74.00	200	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

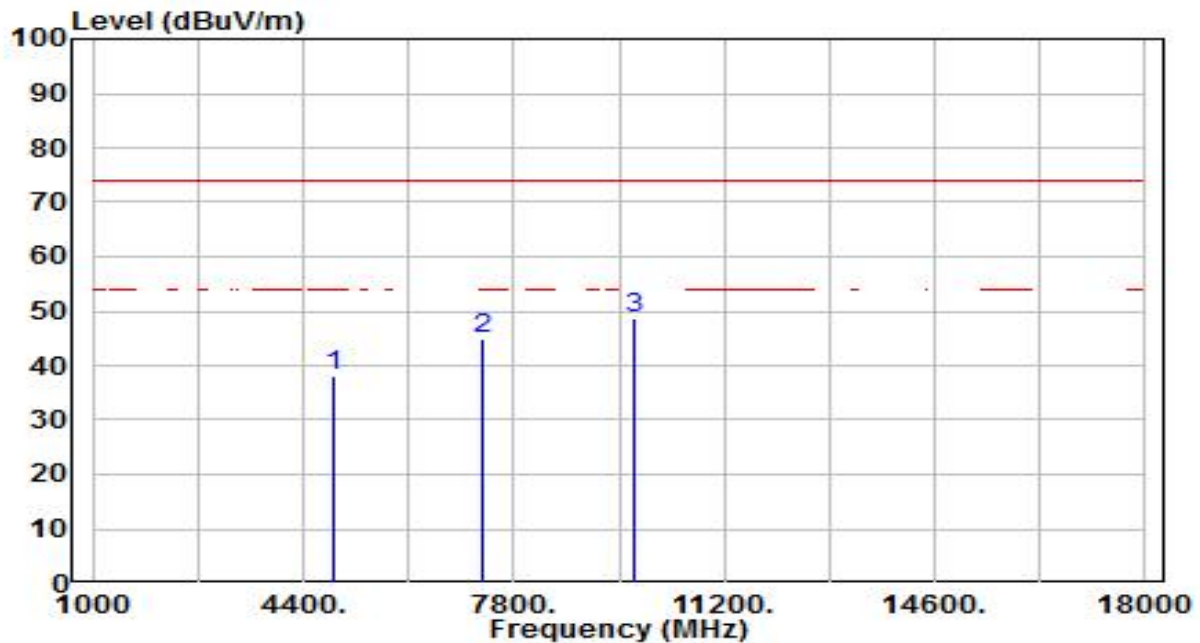


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.45	3.84	38.29	-35.71	74.00	200	125	Peak
2	7311.000	32.85	11.94	44.79	-29.21	74.00	200	195	Peak
3	* 9748.000	32.90	15.95	48.86	-25.14	74.00	200	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

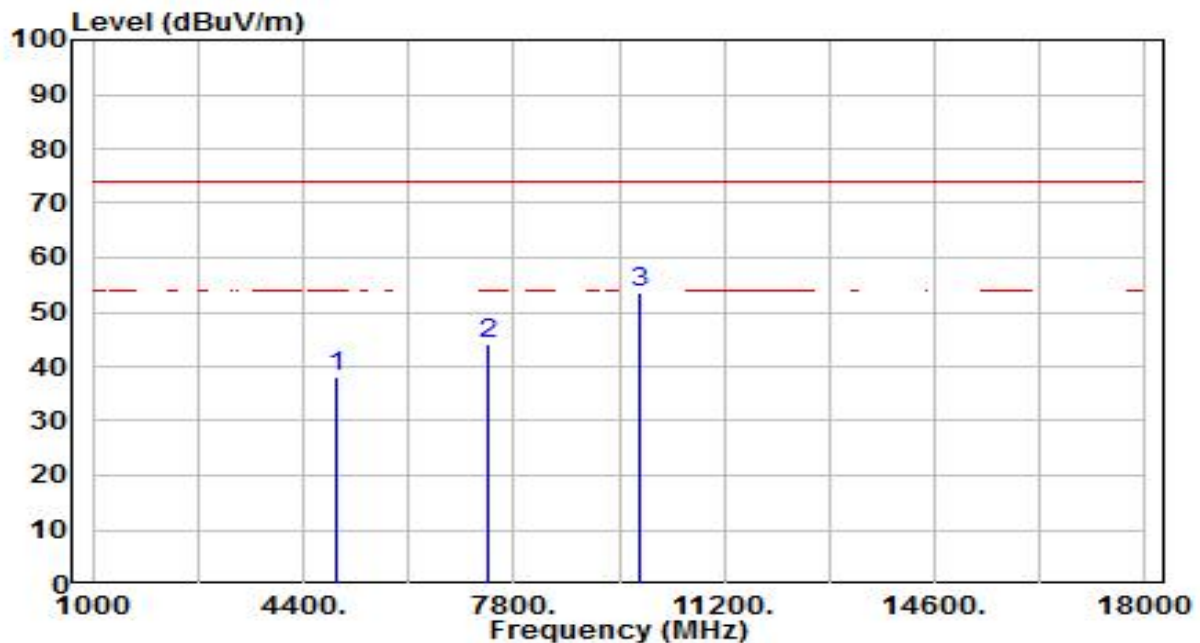


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.06	3.92	37.98	-36.02	74.00	200	247	Peak
2	7386.000	31.79	12.21	44.00	-30.00	74.00	200	344	Peak
3	* 9848.000	37.42	16.14	53.56	-20.44	74.00	200	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

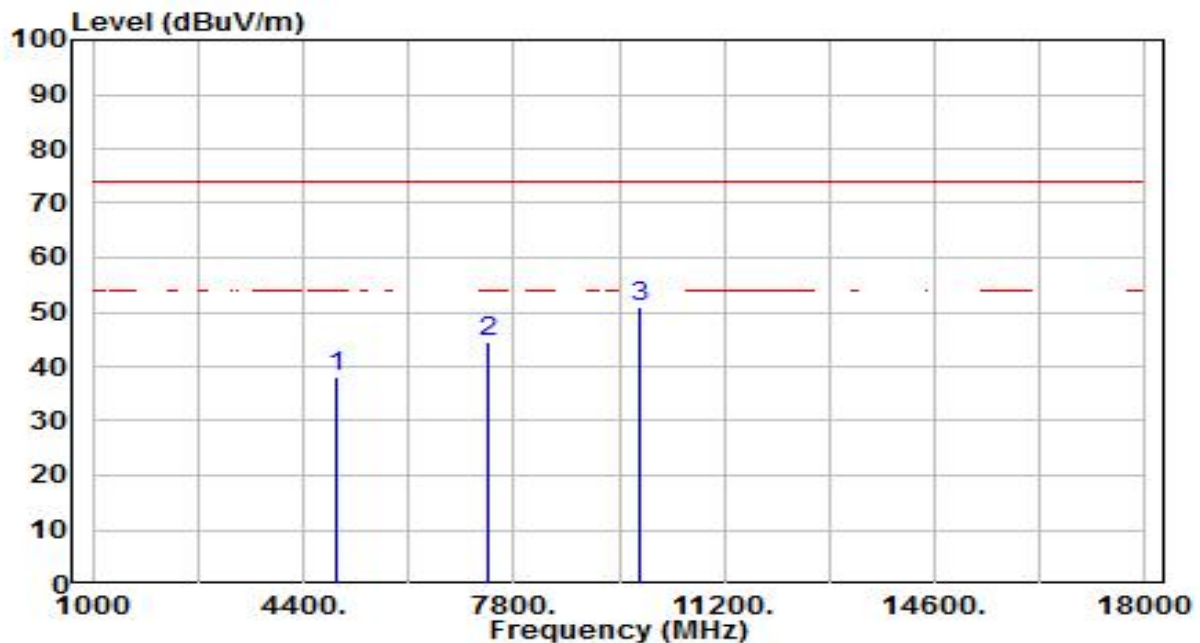


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.16	3.92	38.08	-35.92	74.00	200	16	Peak
2	7386.000	32.27	12.21	44.47	-29.53	74.00	200	0	Peak
3	* 9848.000	34.97	16.14	51.11	-22.89	74.00	200	337	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

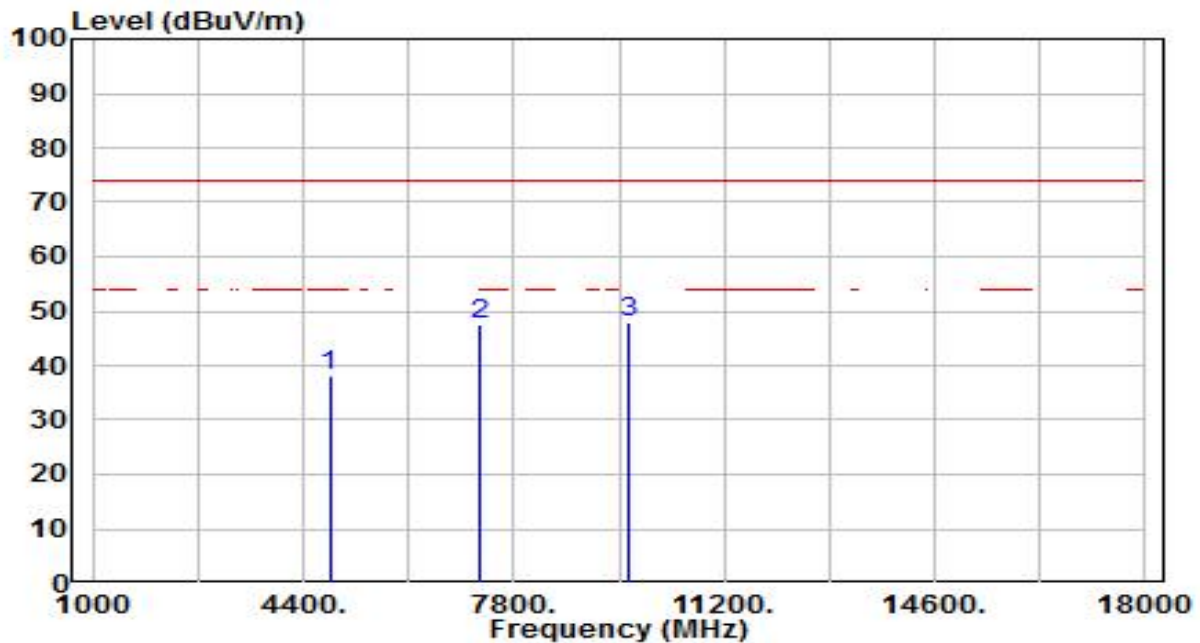


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.55	3.75	38.29	-35.71	74.00	200	183	Peak
2	7236.000	35.73	11.68	47.41	-26.59	74.00	200	238	Peak
3	* 9648.000	32.05	15.77	47.82	-26.18	74.00	200	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

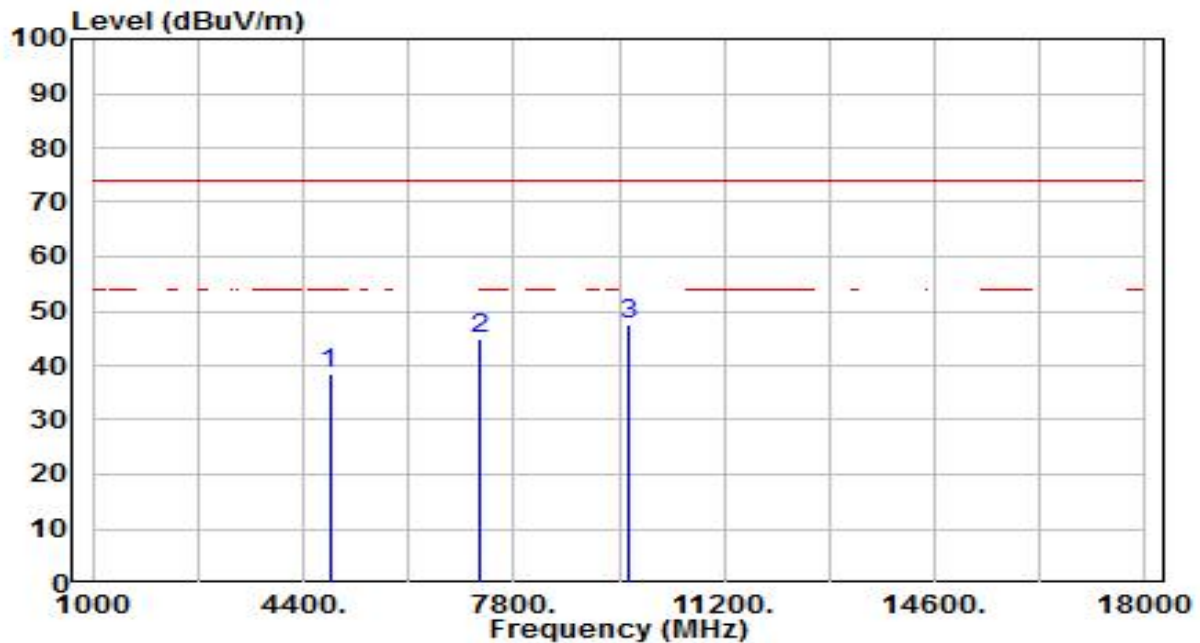


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.68	3.75	38.43	-35.57	74.00	200	271	Peak
2	7236.000	33.34	11.68	45.01	-28.99	74.00	200	92	Peak
3	* 9648.000	31.84	15.77	47.61	-26.39	74.00	200	123	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

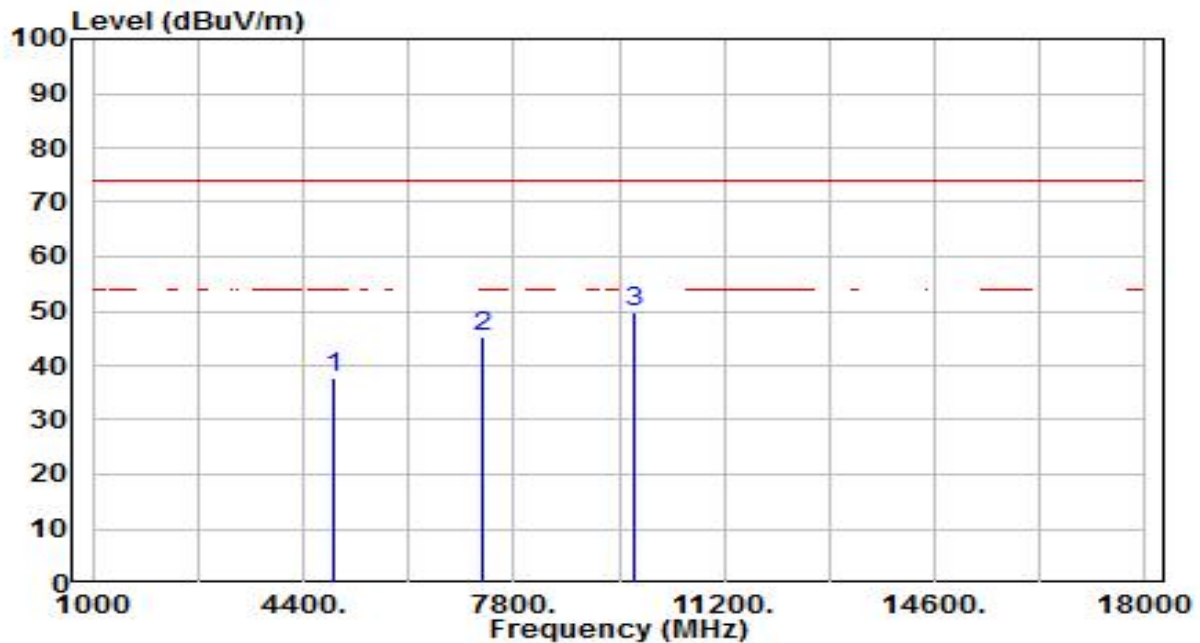


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.01	3.84	37.84	-36.16	74.00	200	161	Peak
2	7311.000	33.20	11.94	45.14	-28.86	74.00	200	233	Peak
3	* 9748.000	33.77	15.95	49.72	-24.28	74.00	200	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

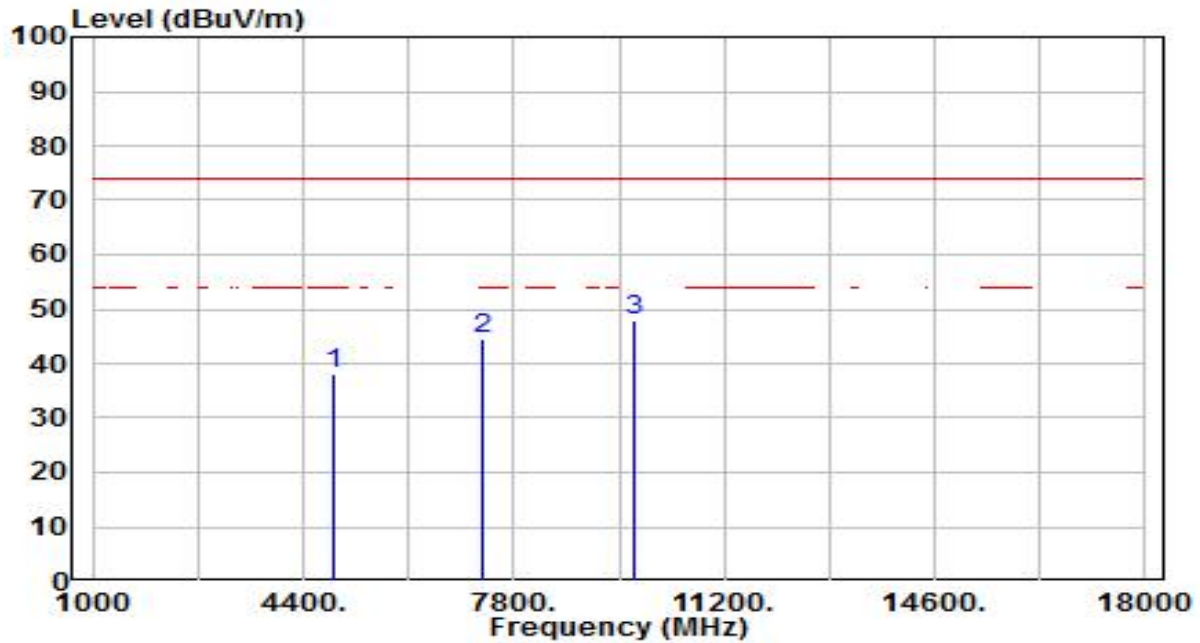


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.37	3.84	38.21	-35.79	74.00	200	149	Peak
2	7311.000	32.48	11.94	44.42	-29.58	74.00	200	302	Peak
3	* 9748.000	32.04	15.95	48.00	-26.00	74.00	200	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

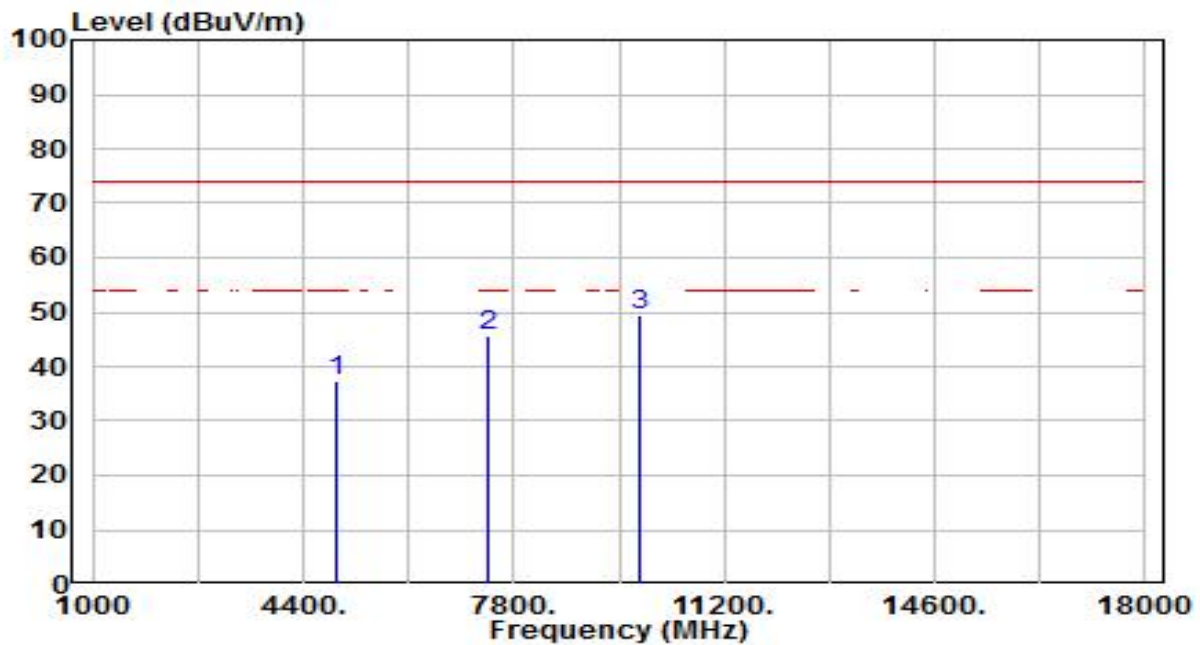


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.36	3.92	37.28	-36.72	74.00	200	200	Peak
2	7386.000	33.39	12.21	45.59	-28.41	74.00	200	143	Peak
3	* 9848.000	33.35	16.14	49.48	-24.52	74.00	200	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

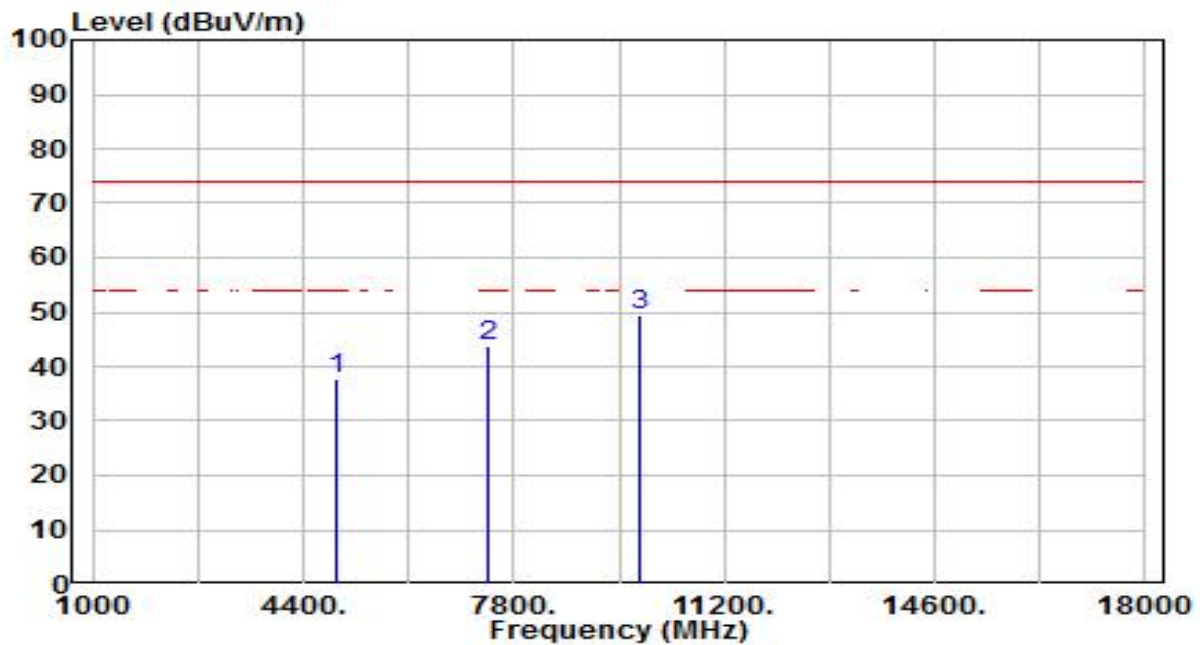


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.97	3.92	37.89	-36.11	74.00	200	193	Peak
2	7386.000	31.74	12.21	43.95	-30.05	74.00	200	137	Peak
3	* 9848.000	33.32	16.14	49.46	-24.54	74.00	200	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

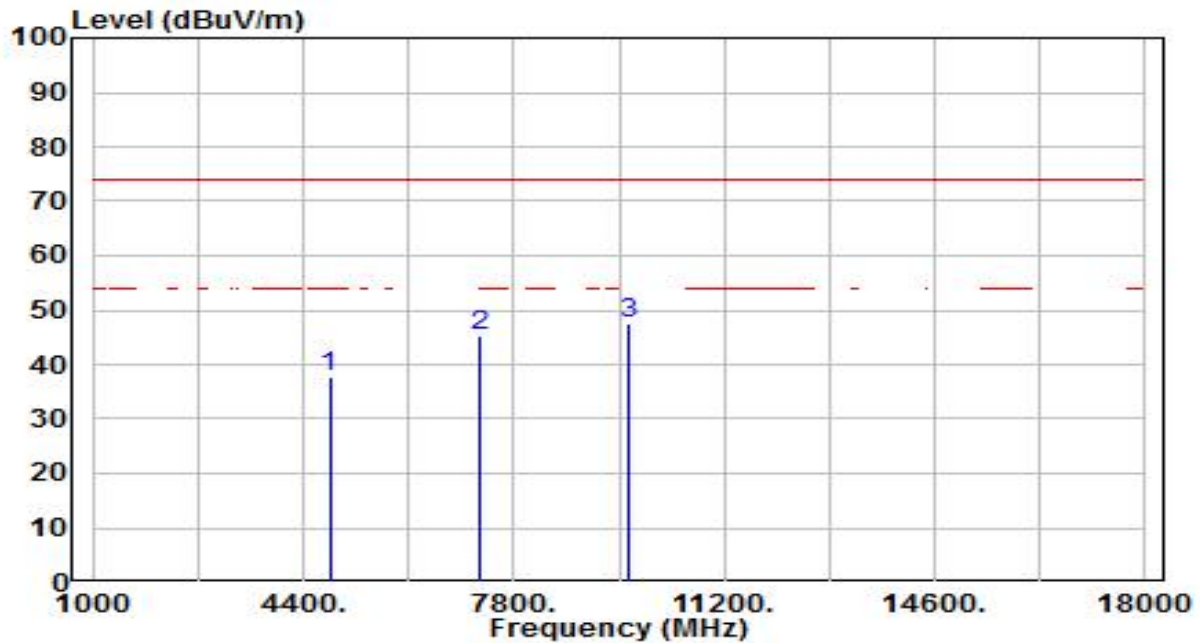


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.01	3.75	37.76	-36.24	74.00	200	27	Peak
2	7236.000	33.54	11.68	45.21	-28.79	74.00	200	52	Peak
3	* 9648.000	31.74	15.77	47.51	-26.49	74.00	200	87	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

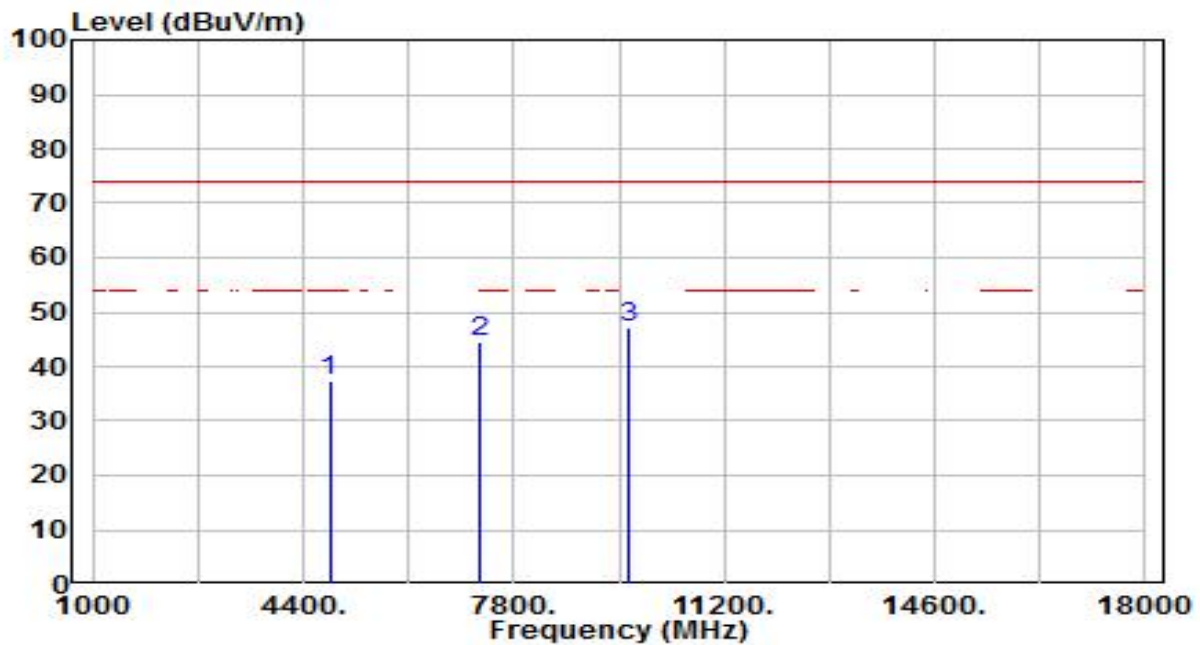


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.47	3.75	37.21	-36.79	74.00	200	16	Peak
2	7236.000	32.91	11.68	44.59	-29.41	74.00	200	267	Peak
3	* 9648.000	31.36	15.77	47.13	-26.87	74.00	200	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

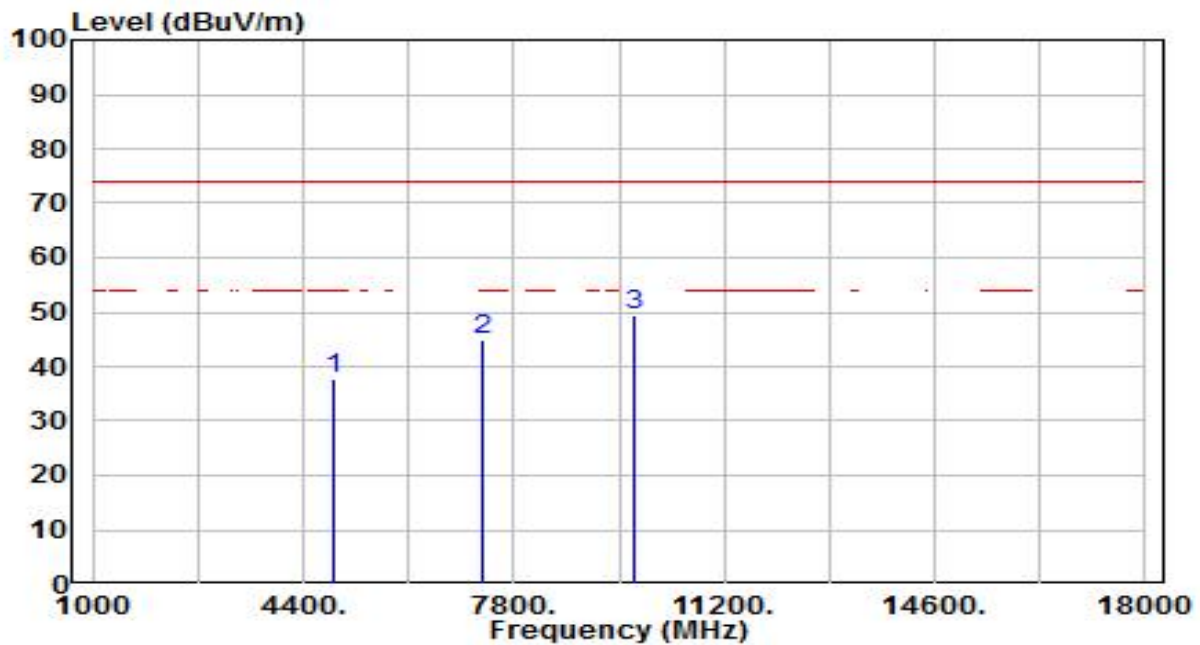


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.94	3.84	37.77	-36.23	74.00	200	5	Peak
2	7311.000	33.00	11.94	44.94	-29.06	74.00	200	161	Peak
3	* 9748.000	33.66	15.95	49.61	-24.39	74.00	200	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

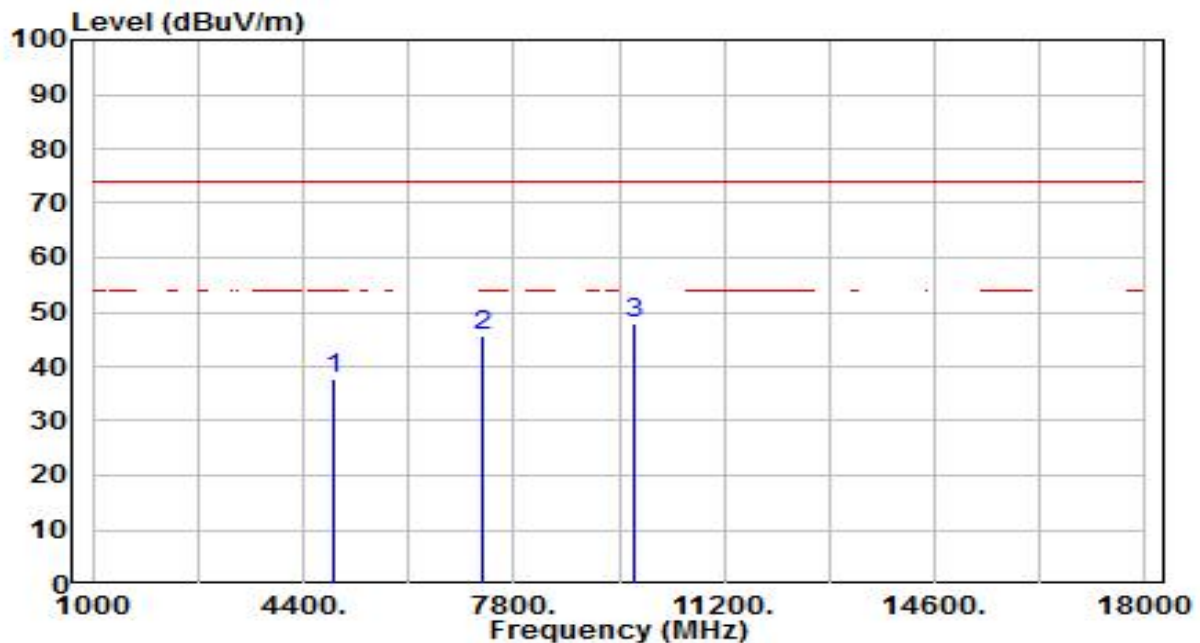


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.96	3.84	37.80	-36.20	74.00	200	134	Peak
2	7311.000	33.57	11.94	45.51	-28.49	74.00	200	120	Peak
3	* 9748.000	32.15	15.95	48.11	-25.89	74.00	200	56	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

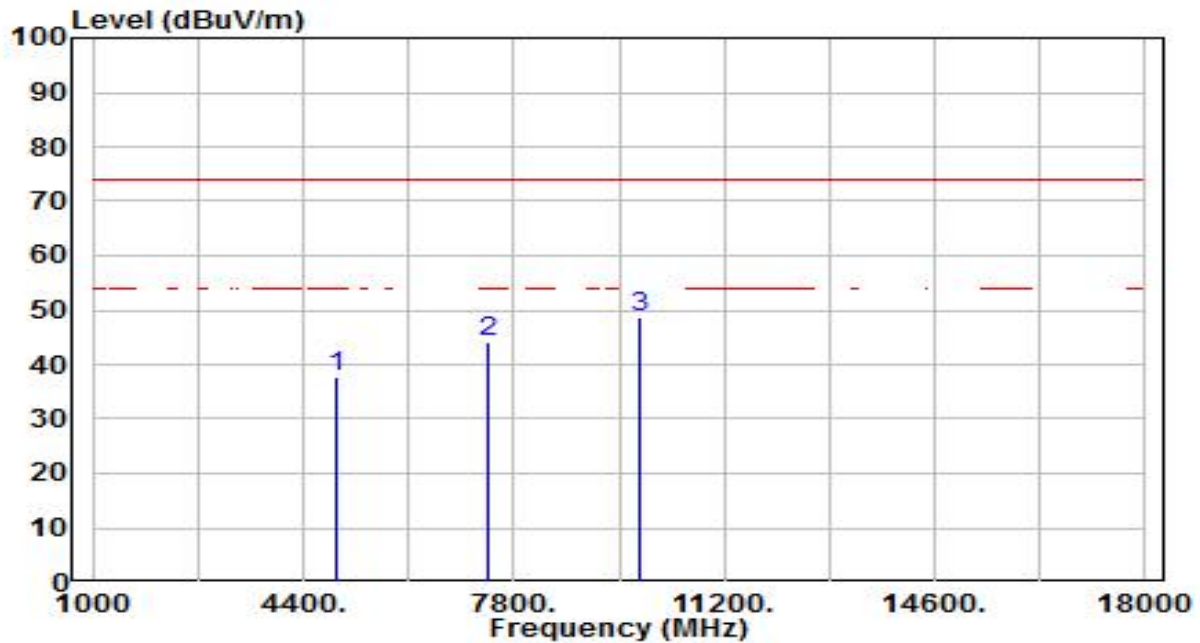


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.95	3.92	37.87	-36.13	74.00	200	20	Peak
2	7386.000	32.09	12.21	44.29	-29.71	74.00	200	181	Peak
3	* 9848.000	32.56	16.14	48.70	-25.30	74.00	200	216	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

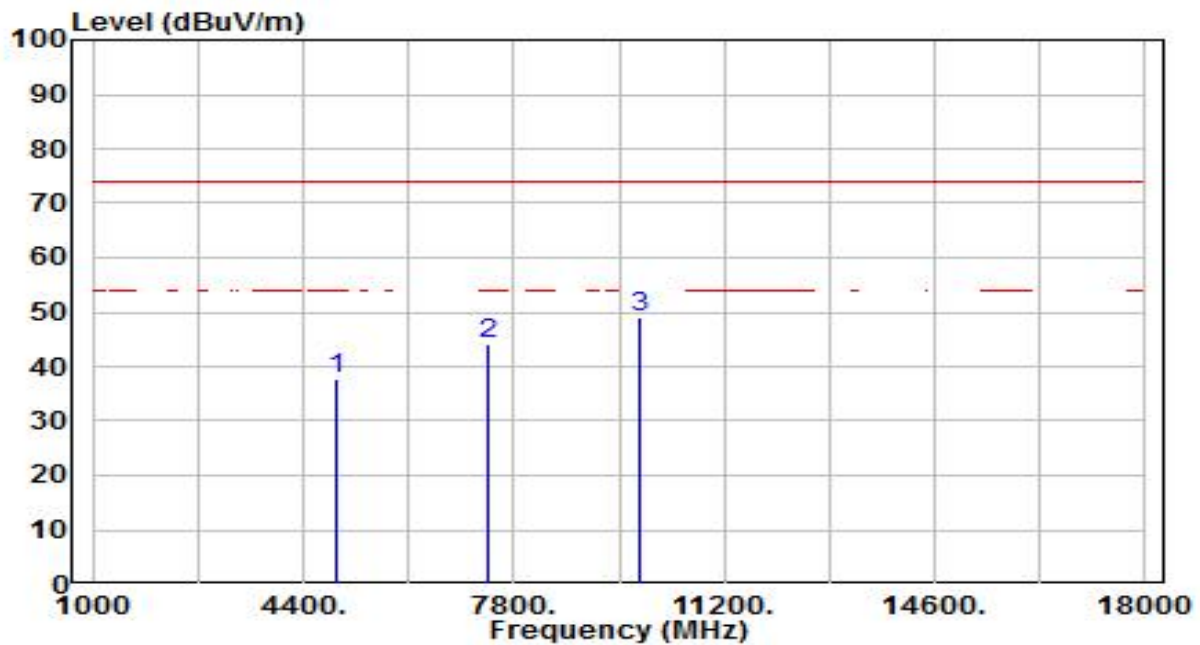


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.64	3.92	37.56	-36.44	74.00	200	239	Peak
2	7386.000	31.97	12.21	44.18	-29.82	74.00	200	208	Peak
3	* 9848.000	32.84	16.14	48.98	-25.02	74.00	200	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

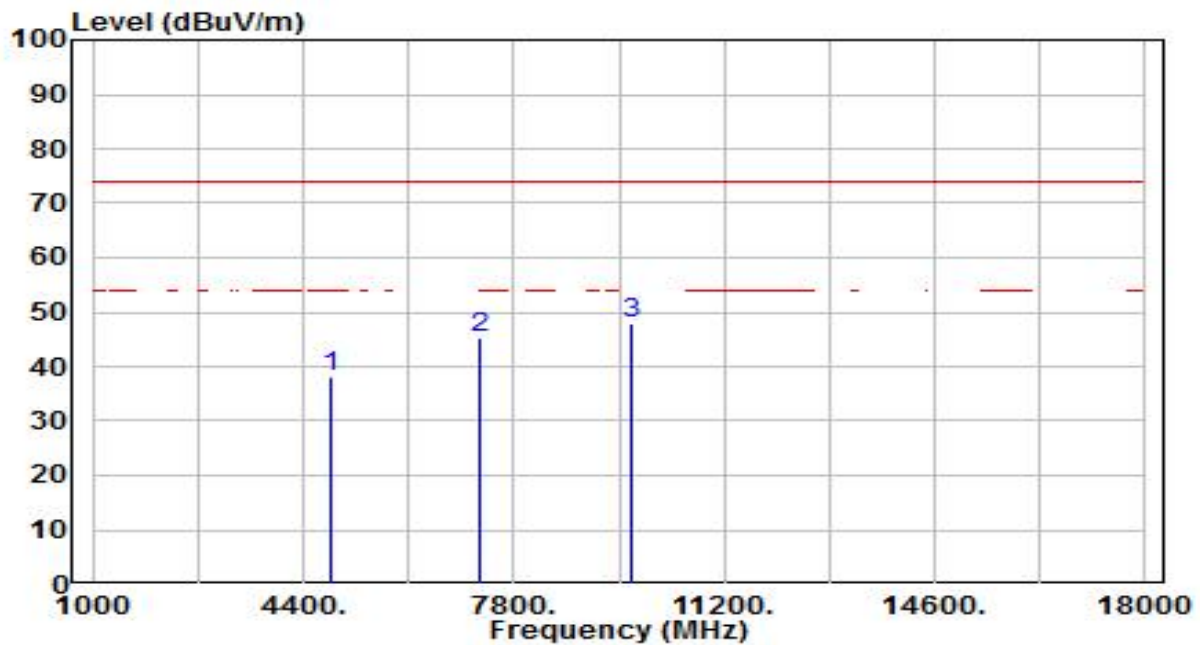


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.26	3.78	38.04	-35.96	74.00	200	300	Peak
2	7266.000	33.45	11.78	45.23	-28.77	74.00	200	233	Peak
3	* 9688.000	32.12	15.84	47.96	-26.04	74.00	200	13	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

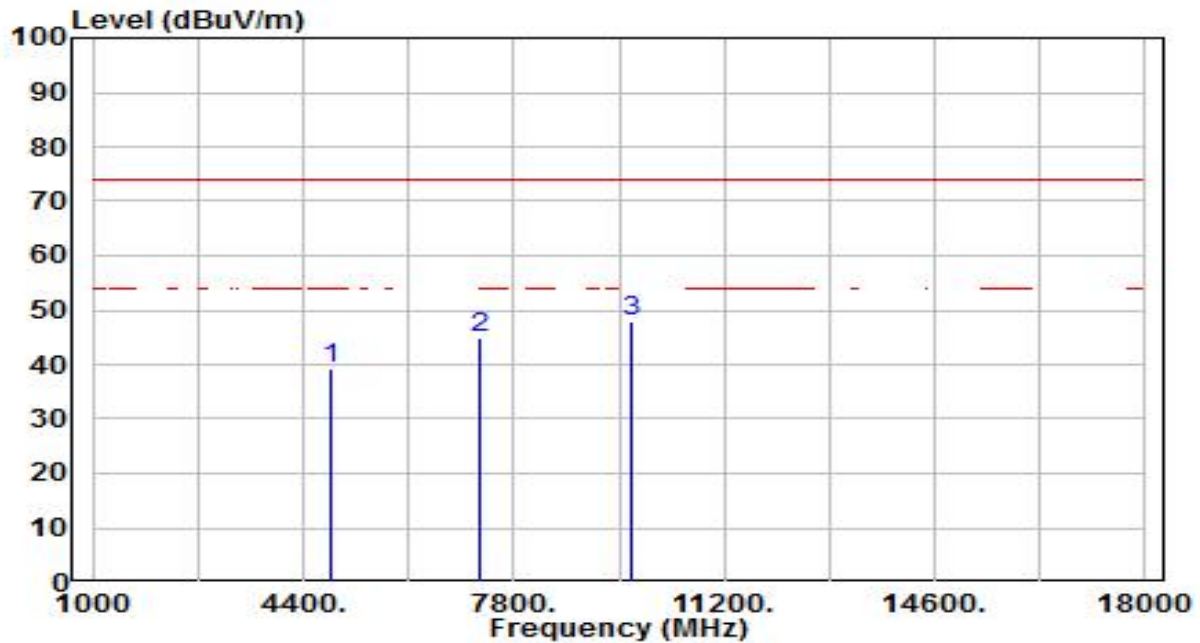


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.40	3.78	39.18	-34.82	74.00	200	281	Peak
2	7266.000	33.20	11.78	44.98	-29.02	74.00	200	207	Peak
3	* 9688.000	32.09	15.84	47.93	-26.07	74.00	200	21	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

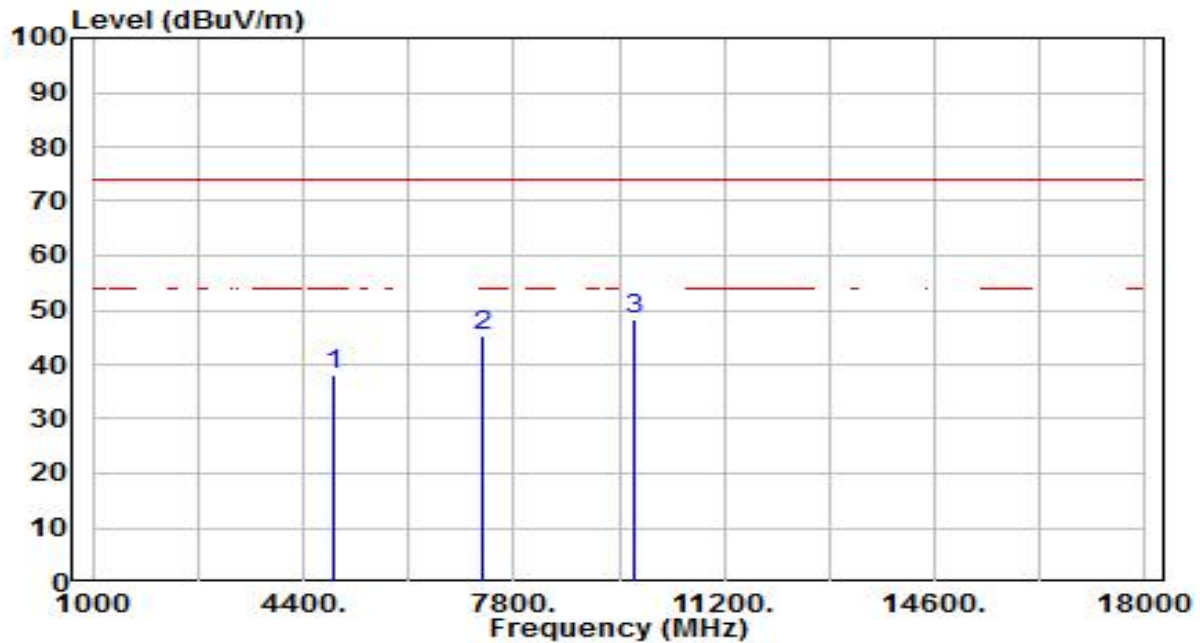


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.34	3.84	38.18	-35.82	74.00	200	185	Peak
2	7311.000	33.42	11.94	45.36	-28.64	74.00	200	185	Peak
3	* 9748.000	32.31	15.95	48.27	-25.73	74.00	200	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

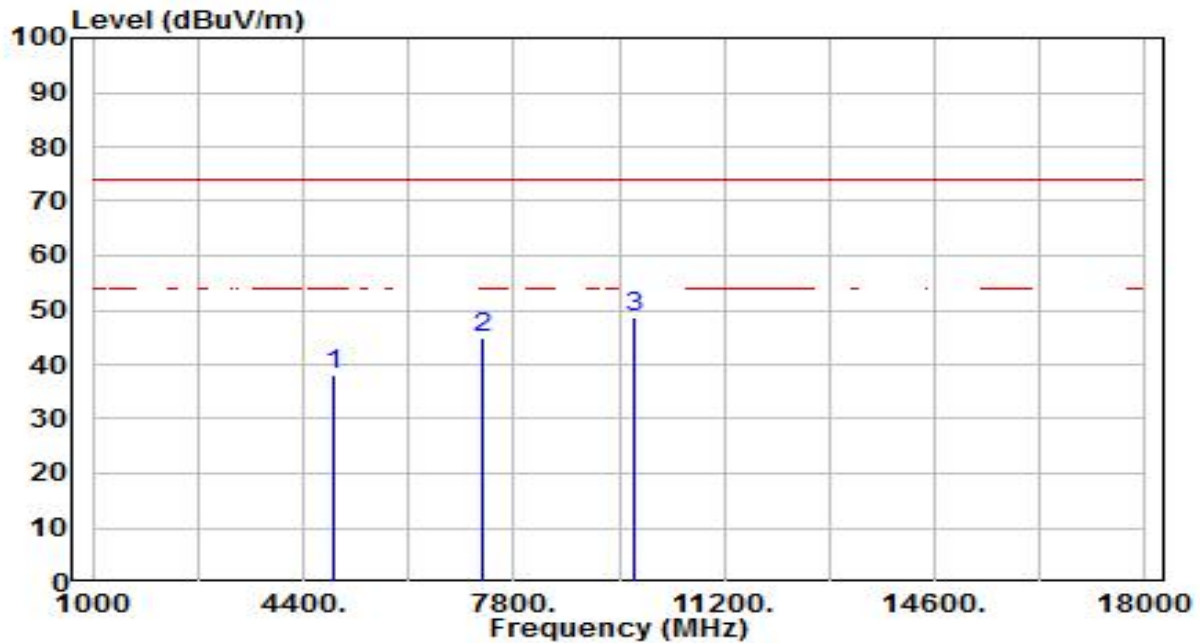


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.33	3.84	38.16	-35.84	74.00	200	228	Peak
2	7311.000	32.80	11.94	44.74	-29.26	74.00	200	246	Peak
3	* 9748.000	32.90	15.95	48.85	-25.15	74.00	200	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

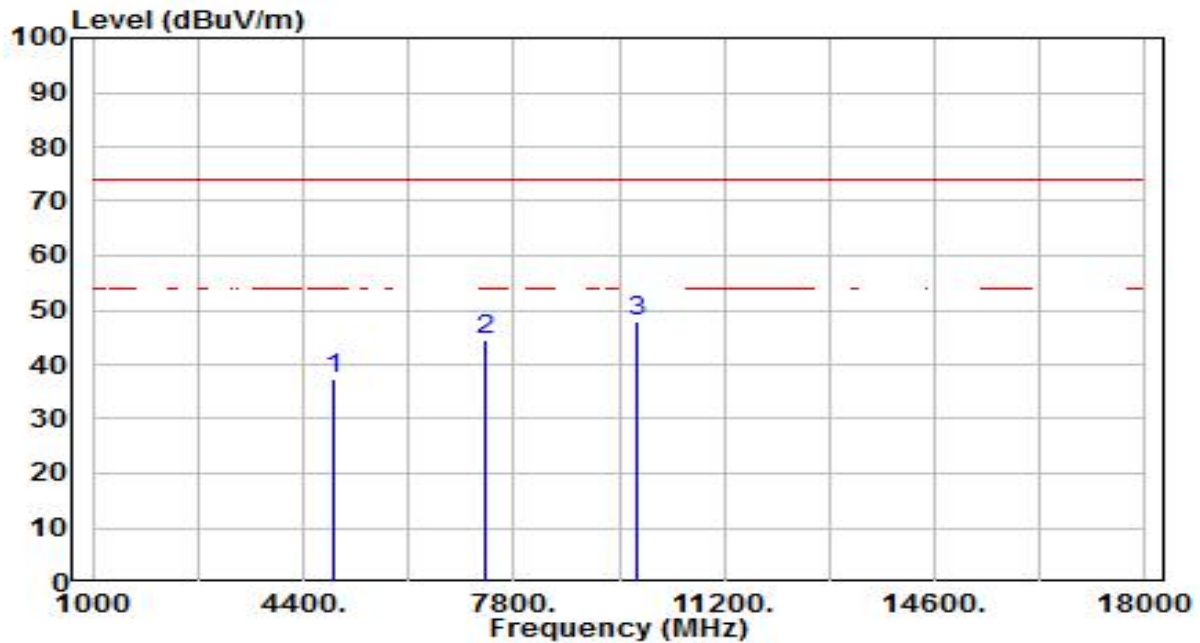


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.31	3.89	37.20	-36.80	74.00	200	98	Peak
2	7356.000	32.31	12.10	44.41	-29.59	74.00	200	147	Peak
3	* 9808.000	31.70	16.06	47.76	-26.24	74.00	200	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

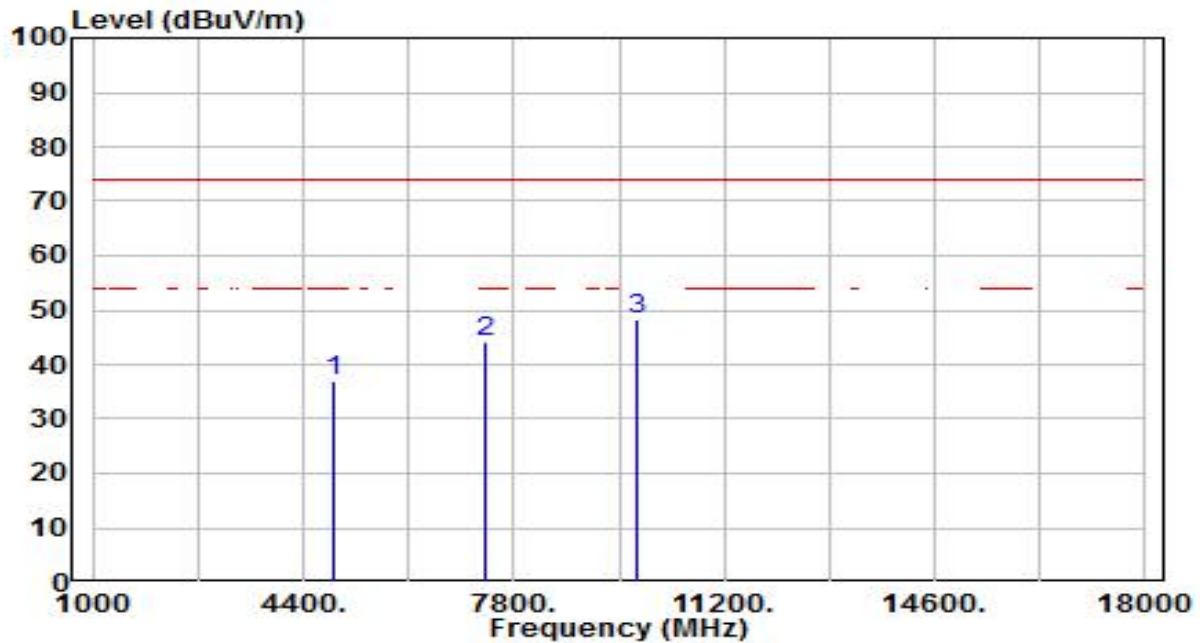


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.04	3.89	36.92	-37.08	74.00	200	270	Peak
2	7356.000	32.09	12.10	44.19	-29.81	74.00	200	1	Peak
3	* 9808.000	32.05	16.06	48.11	-25.89	74.00	200	66	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

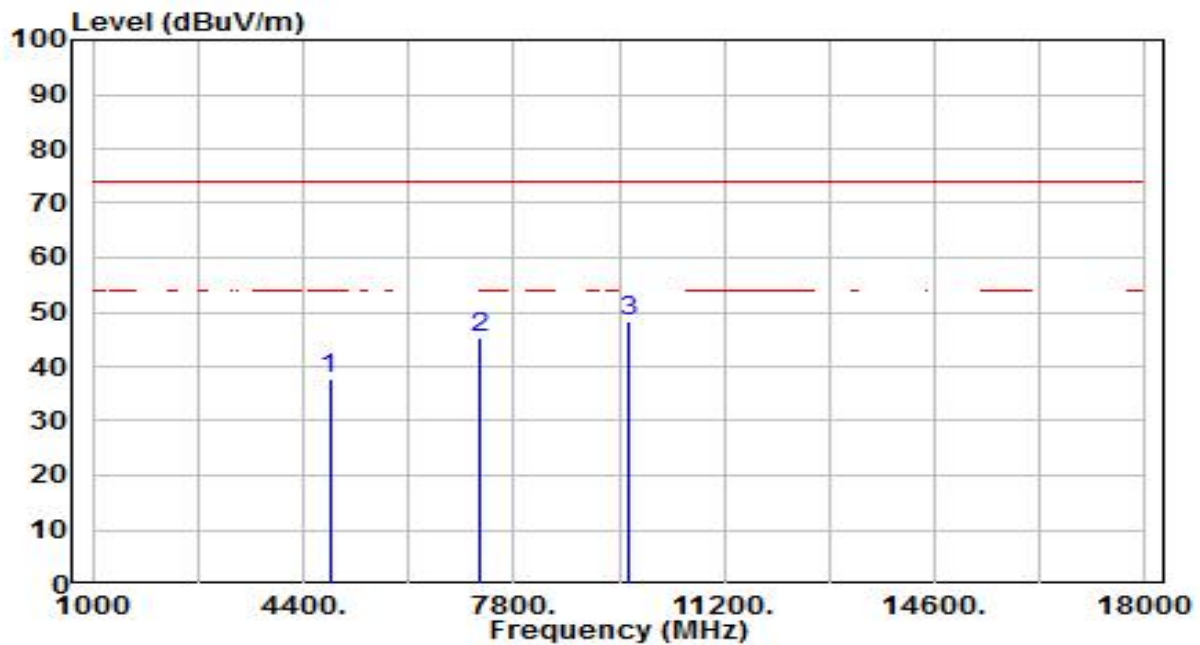


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.13	3.75	37.87	-36.13	74.00	200	224	Peak
2	7236.000	33.66	11.68	45.34	-28.66	74.00	200	298	Peak
3	* 9648.000	32.43	15.77	48.19	-25.81	74.00	200	79	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

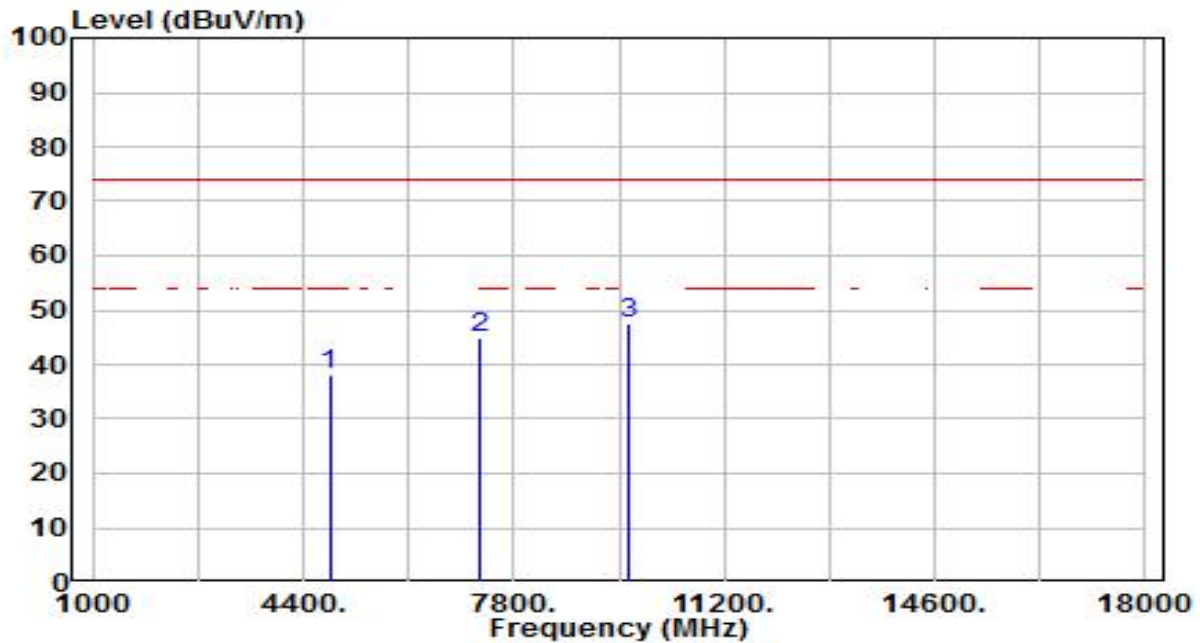


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.23	3.75	37.97	-36.03	74.00	200	253	Peak
2	7236.000	33.36	11.68	45.04	-28.96	74.00	200	10	Peak
3	* 9648.000	31.90	15.77	47.67	-26.33	74.00	200	88	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

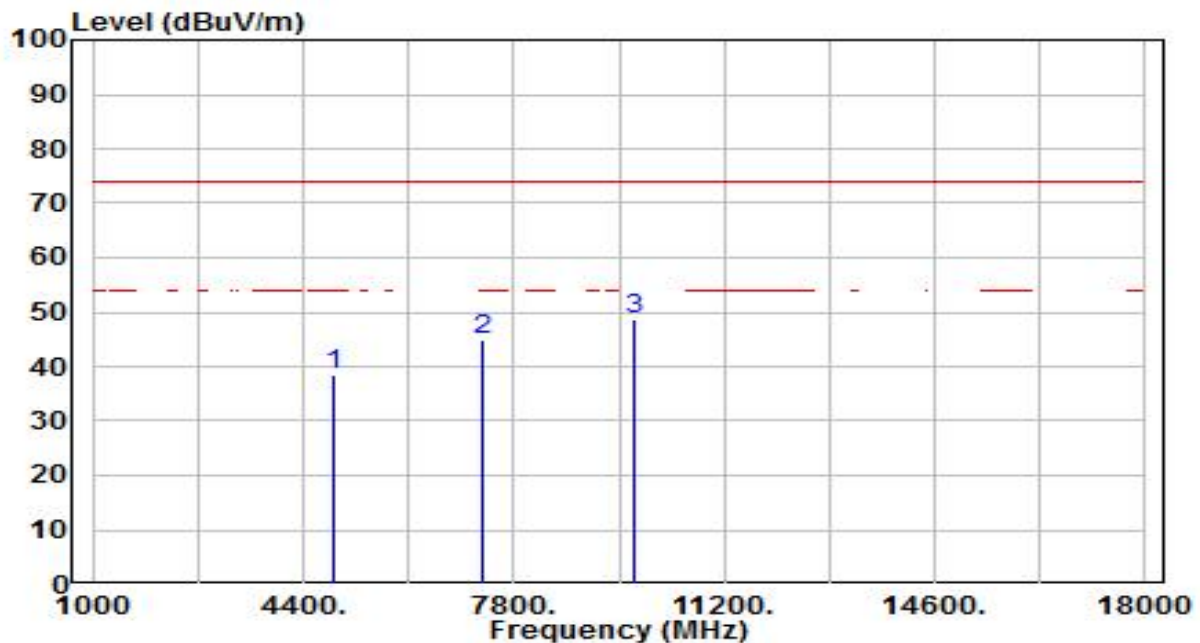


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.60	3.84	38.43	-35.57	74.00	200	230	Peak
2	7311.000	33.04	11.94	44.98	-29.02	74.00	200	254	Peak
3	* 9748.000	32.77	15.95	48.73	-25.27	74.00	200	143	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

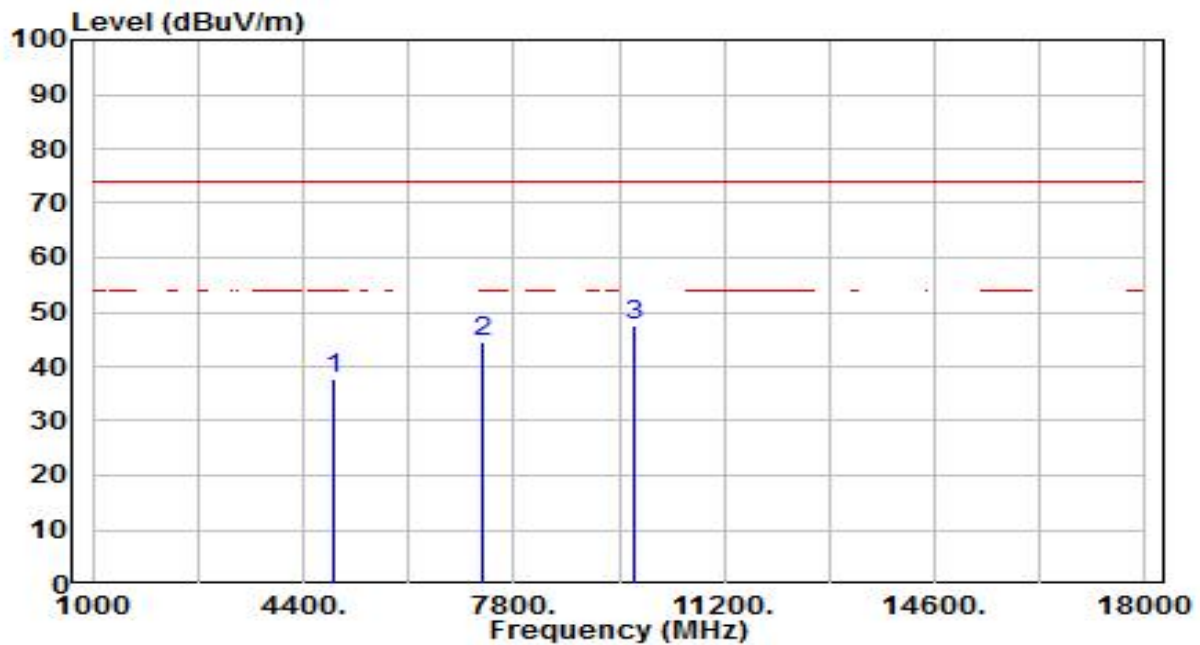


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.99	3.84	37.82	-36.18	74.00	200	302	Peak
2	7311.000	32.57	11.94	44.51	-29.49	74.00	200	337	Peak
3	* 9748.000	31.63	15.95	47.58	-26.42	74.00	200	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

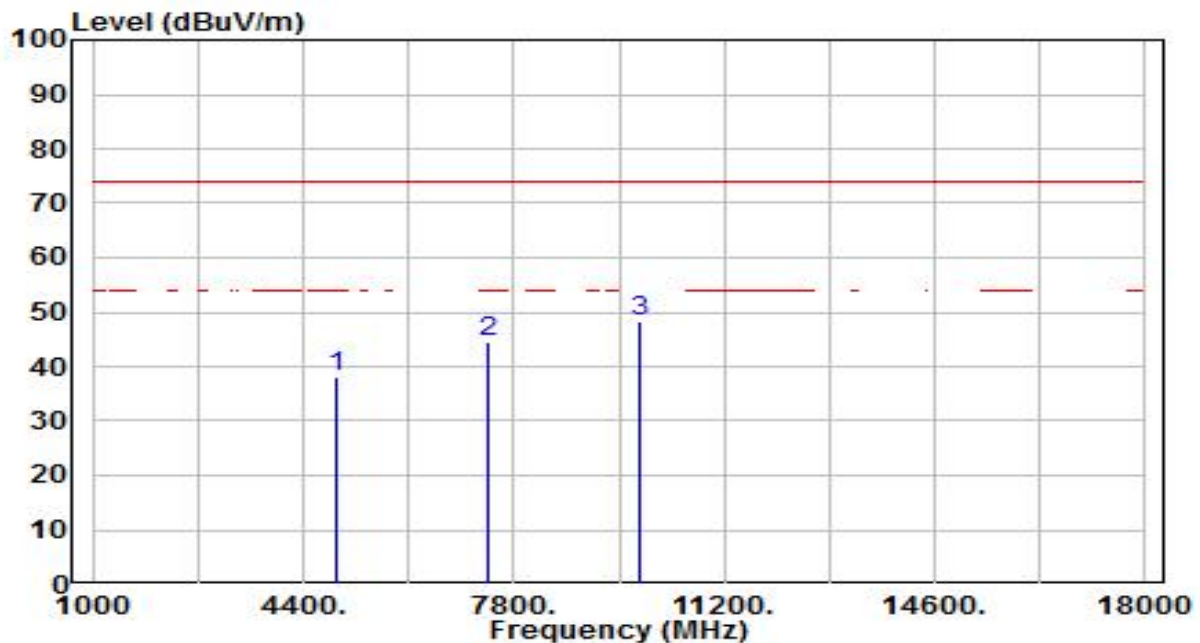


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.06	3.92	37.98	-36.02	74.00	200	353	Peak
2	7386.000	32.44	12.21	44.64	-29.36	74.00	200	65	Peak
3	* 9848.000	32.29	16.14	48.43	-25.57	74.00	200	237	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

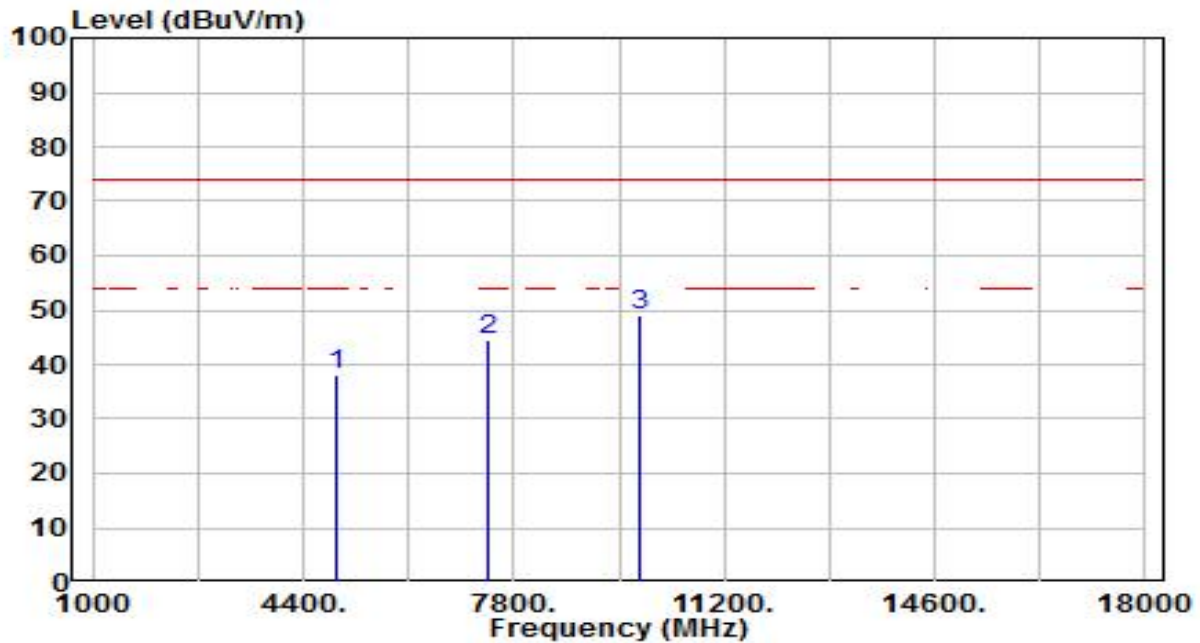


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.02	3.92	37.94	-36.06	74.00	200	277	Peak
2	7386.000	32.32	12.21	44.53	-29.47	74.00	200	129	Peak
3	* 9848.000	33.00	16.14	49.14	-24.86	74.00	200	70	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

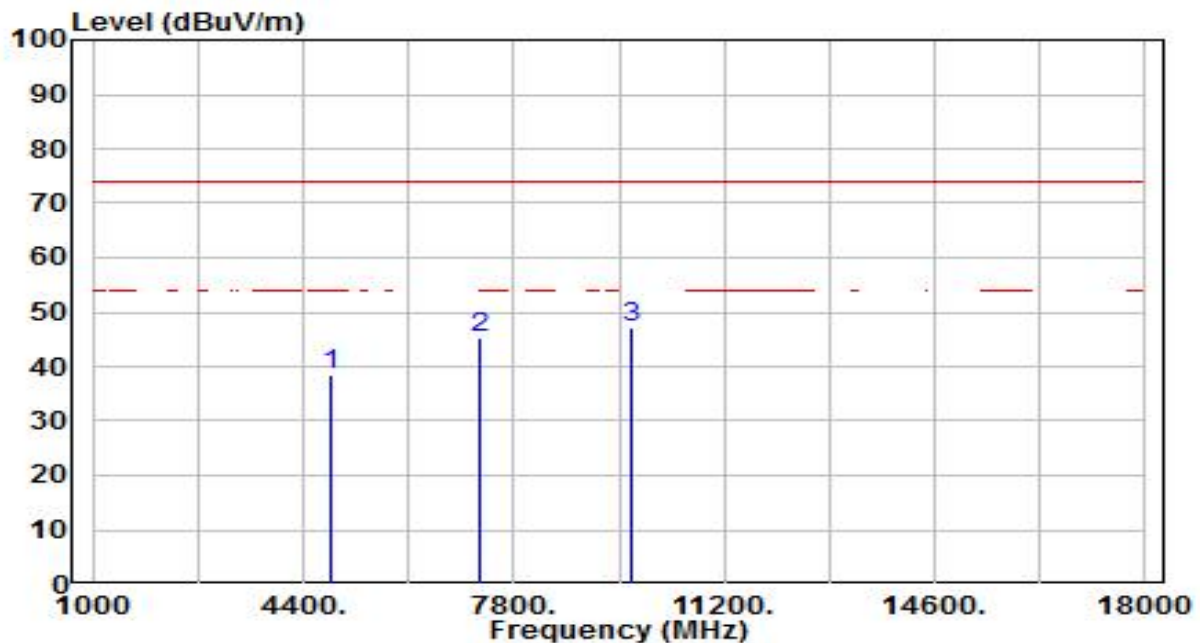


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.78	3.78	38.56	-35.44	74.00	200	336	Peak
2	7266.000	33.54	11.78	45.32	-28.68	74.00	200	227	Peak
3	* 9688.000	31.48	15.84	47.33	-26.67	74.00	200	157	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

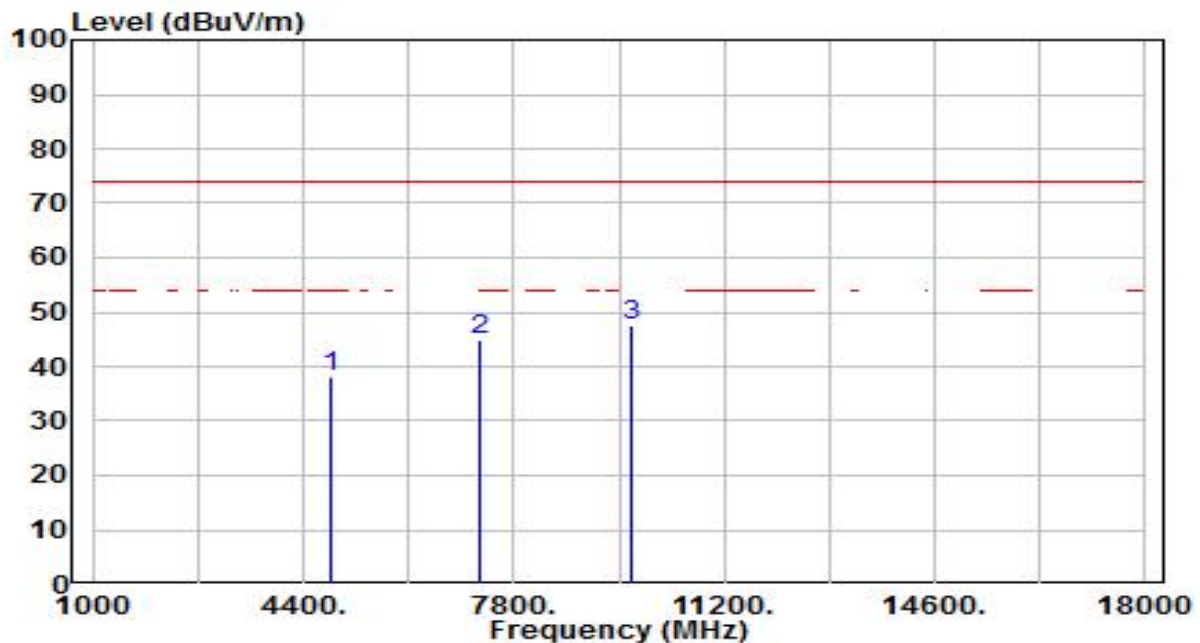


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.33	3.78	38.11	-35.89	74.00	200	189	Peak
2	7266.000	33.06	11.78	44.84	-29.16	74.00	200	357	Peak
3	* 9688.000	31.79	15.84	47.64	-26.36	74.00	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

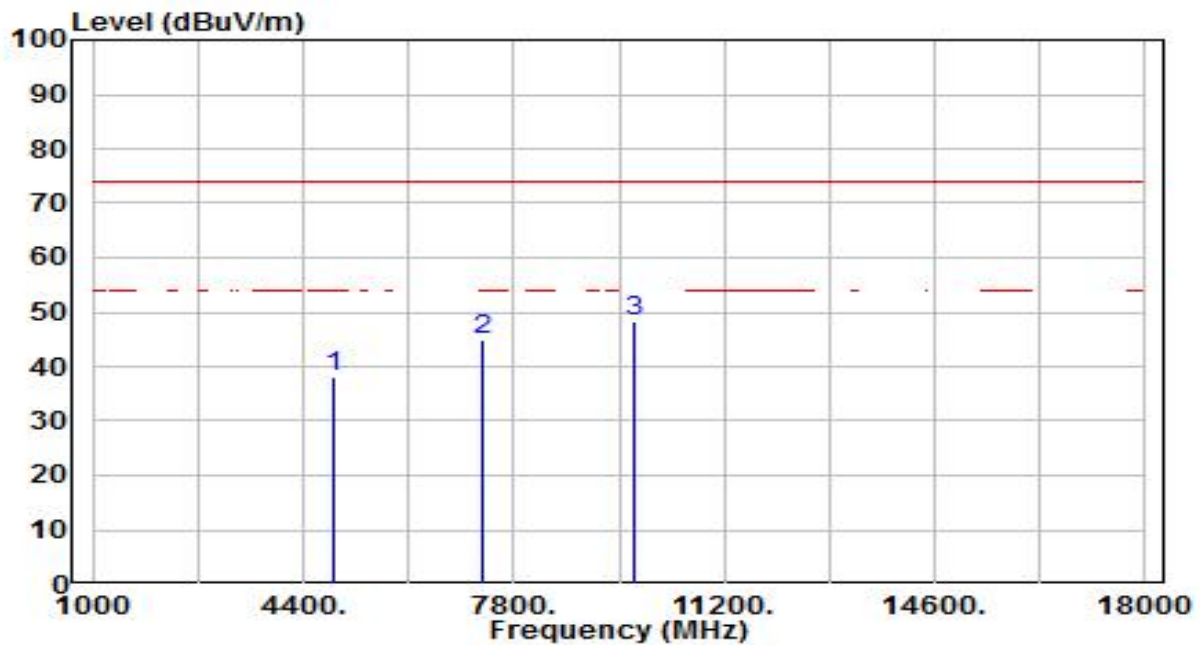


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.21	3.84	38.05	-35.95	74.00	200	251	Peak
2	7311.000	32.94	11.94	44.88	-29.12	74.00	200	202	Peak
3	* 9748.000	32.48	15.95	48.44	-25.56	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

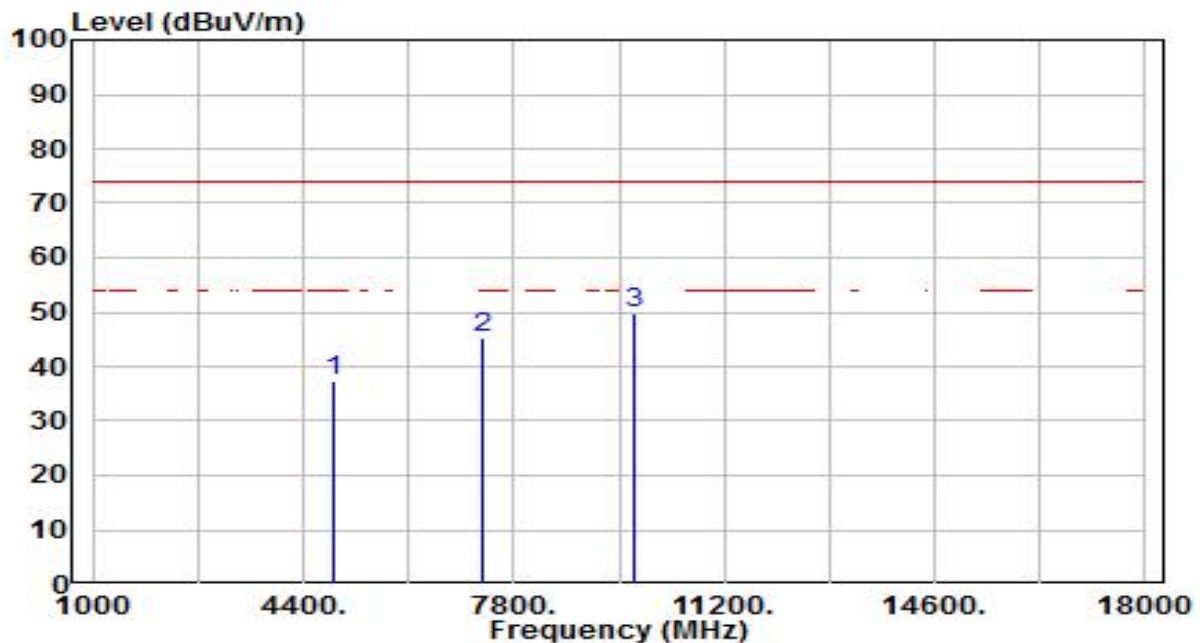


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.56	3.84	37.39	-36.61	74.00	200	200	Peak
2	7311.000	33.20	11.94	45.14	-28.86	74.00	200	120	Peak
3	* 9748.000	33.96	15.95	49.91	-24.09	74.00	200	29	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

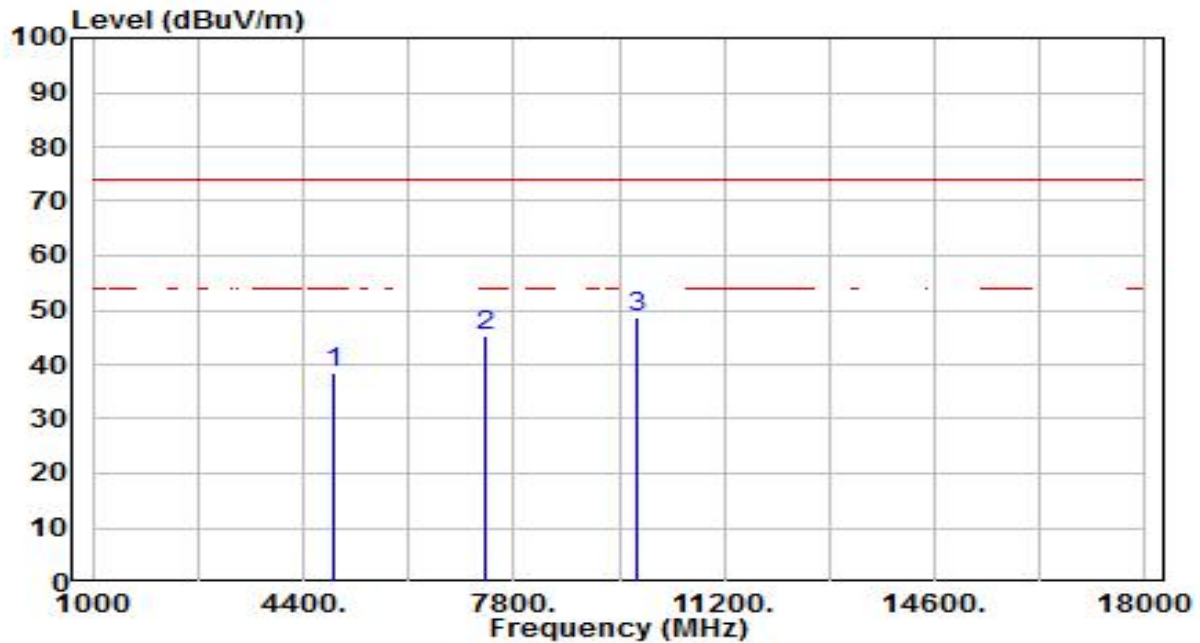


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.74	3.89	38.63	-35.37	74.00	200	199	Peak
2	7356.000	33.03	12.10	45.13	-28.87	74.00	200	230	Peak
3	* 9808.000	32.78	16.06	48.85	-25.15	74.00	200	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

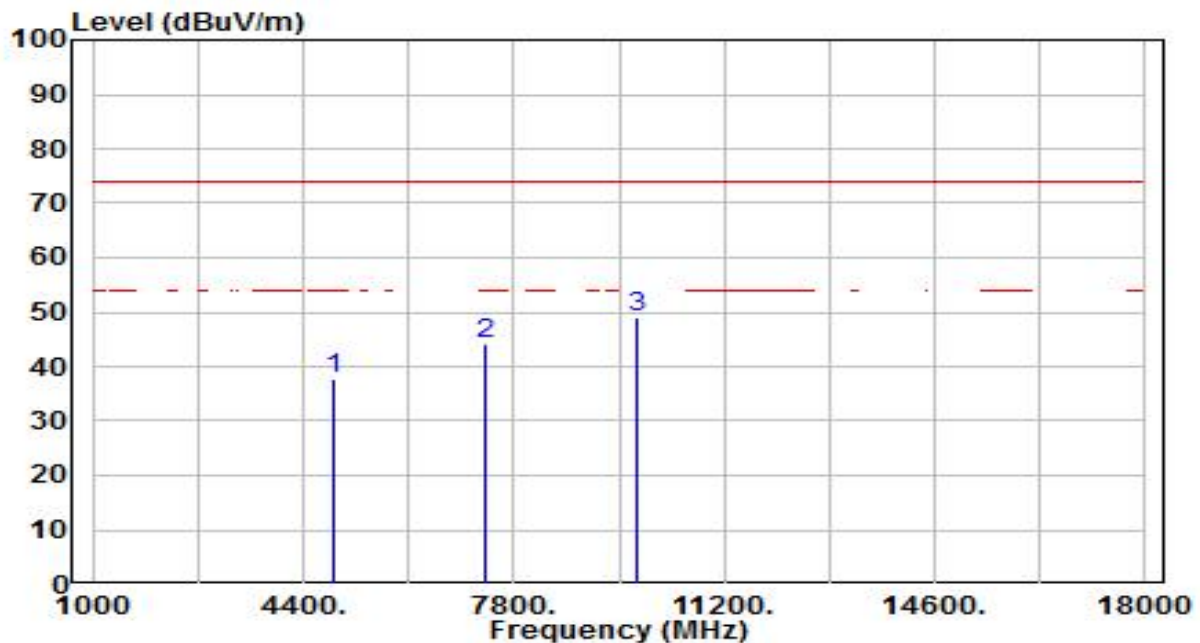


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.66	3.89	37.55	-36.45	74.00	200	144	Peak
2	7356.000	32.04	12.10	44.14	-29.86	74.00	200	81	Peak
3	* 9808.000	32.98	16.06	49.04	-24.96	74.00	200	113	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

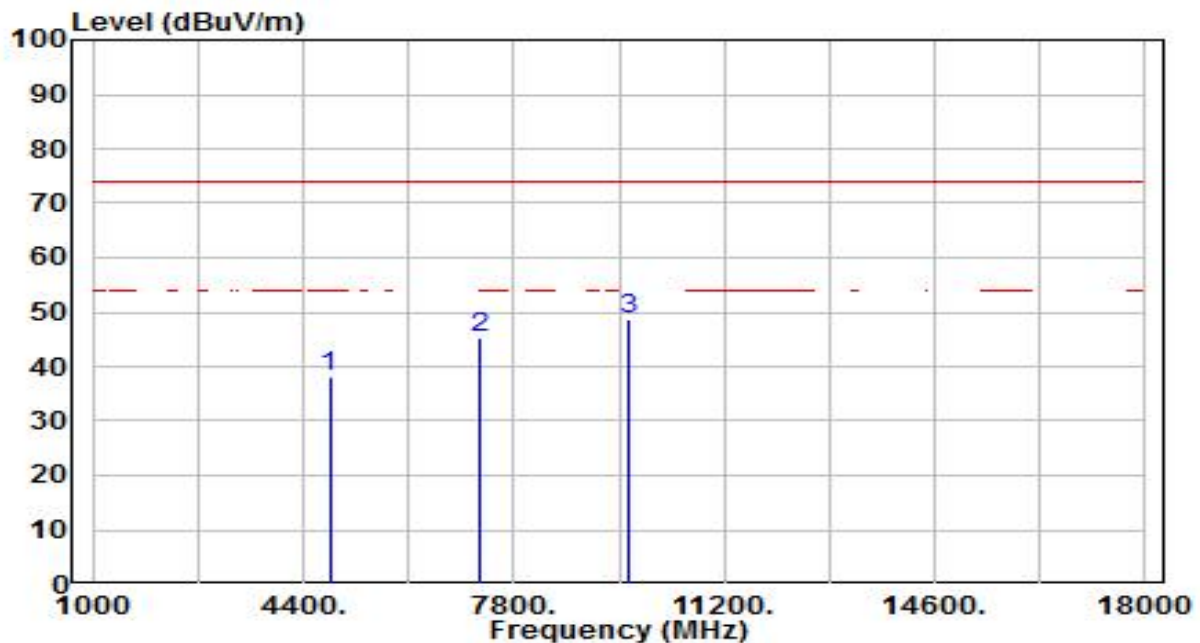


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.20	3.75	37.95	-36.05	74.00	200	300	Peak
2	7236.000	33.45	11.68	45.12	-28.88	74.00	200	163	Peak
3	* 9648.000	32.91	15.77	48.68	-25.32	74.00	200	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

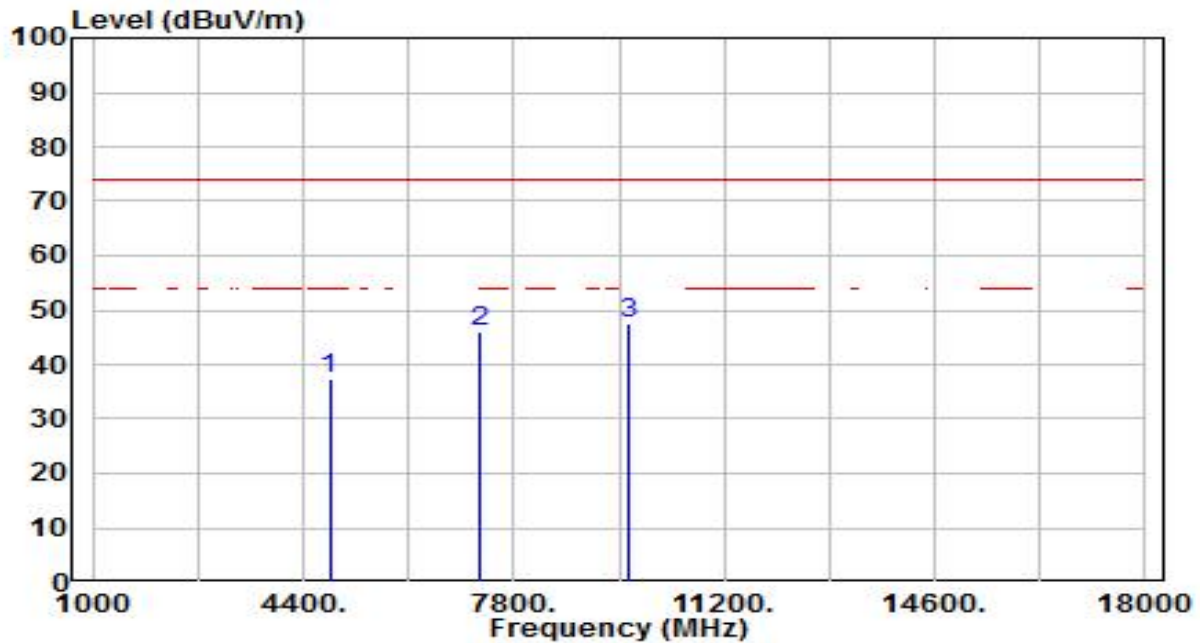


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.61	3.75	37.36	-36.64	74.00	200	164	Peak
2	7236.000	34.38	11.68	46.06	-27.94	74.00	200	206	Peak
3	* 9648.000	31.86	15.77	47.63	-26.37	74.00	200	49	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

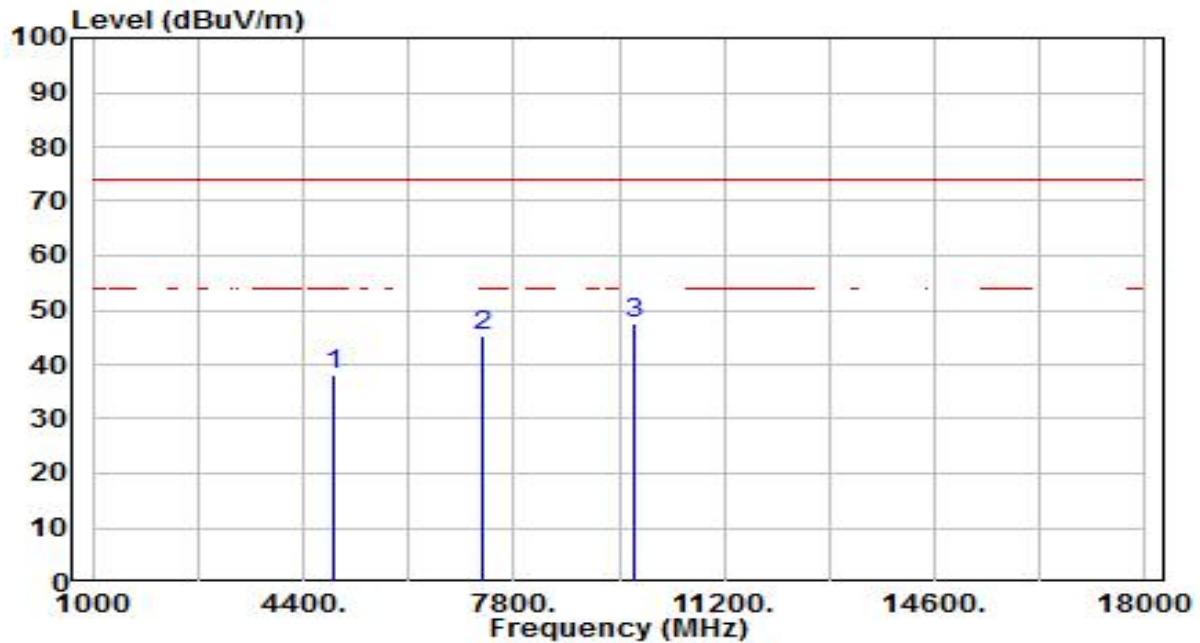


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.13	3.84	37.97	-36.03	74.00	200	51	Peak
2	7311.000	33.31	11.94	45.25	-28.75	74.00	200	118	Peak
3	* 9748.000	31.61	15.95	47.57	-26.43	74.00	200	328	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

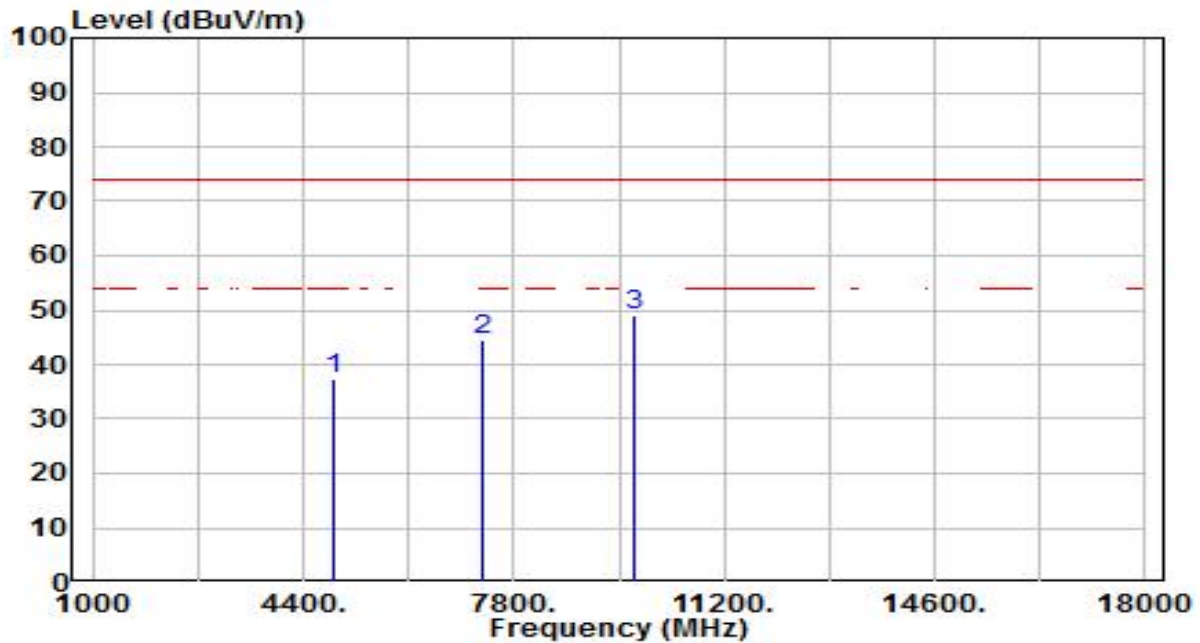


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.67	3.84	37.50	-36.50	74.00	200	234	Peak
2	7311.000	32.63	11.94	44.57	-29.43	74.00	200	152	Peak
3	* 9748.000	33.10	15.95	49.05	-24.95	74.00	200	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

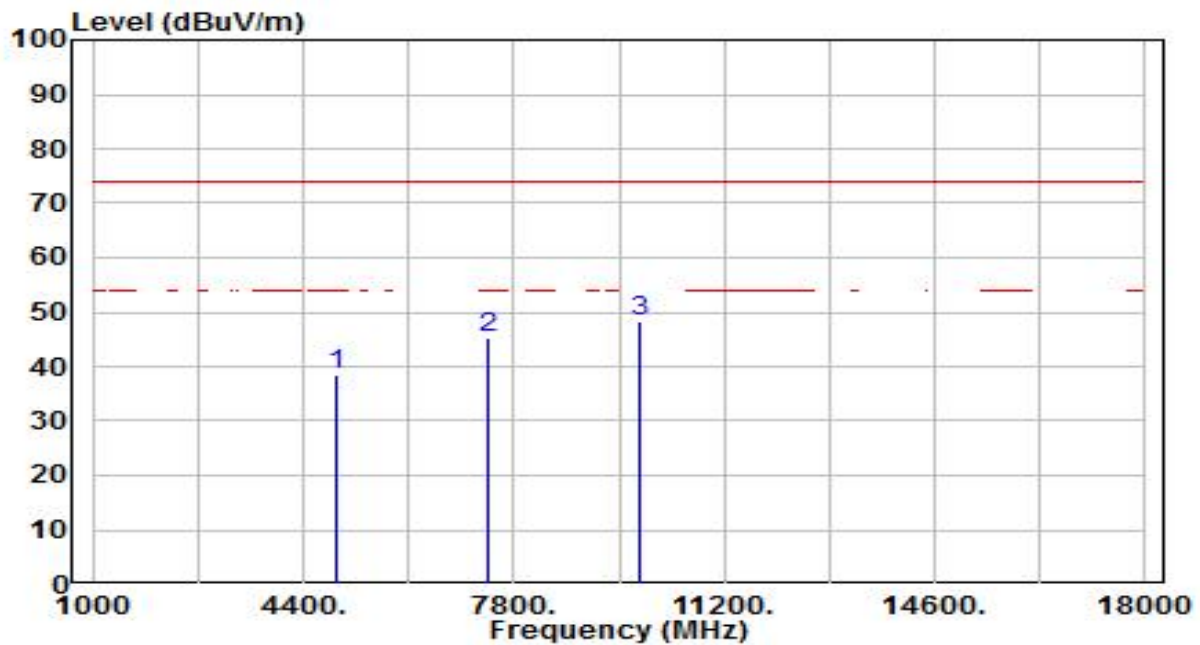


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.49	3.92	38.42	-35.58	74.00	200	45	Peak
2	7386.000	33.15	12.21	45.35	-28.65	74.00	200	38	Peak
3	* 9848.000	32.01	16.14	48.14	-25.86	74.00	200	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

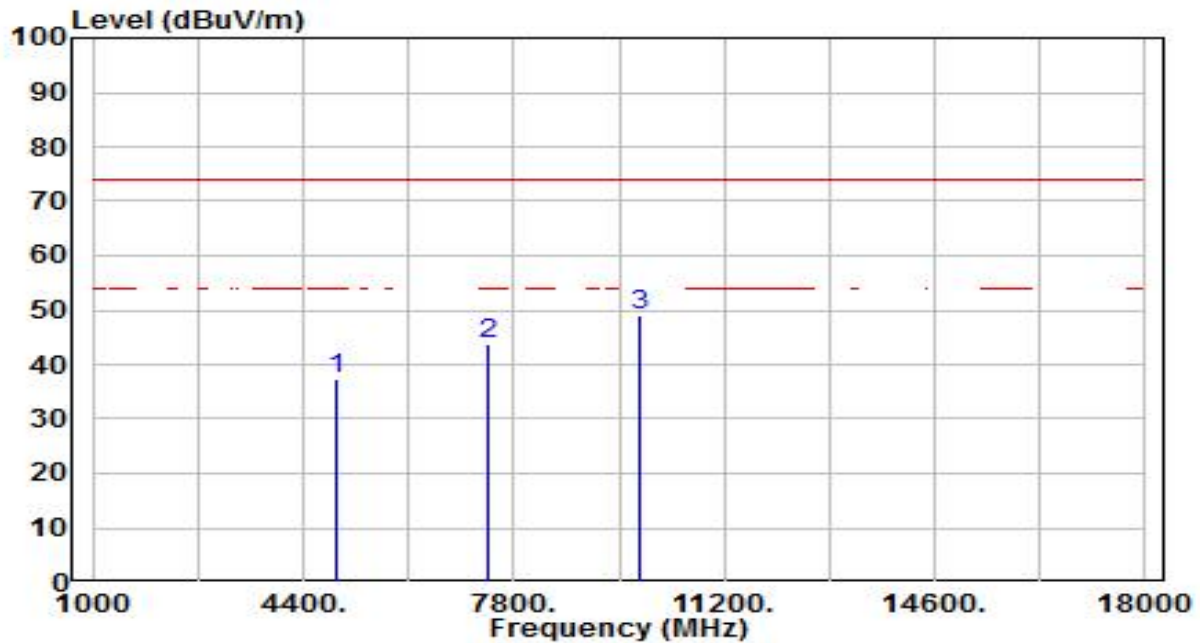


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.53	3.92	37.46	-36.54	74.00	200	227	Peak
2	7386.000	31.74	12.21	43.94	-30.06	74.00	200	259	Peak
3	* 9848.000	32.74	16.14	48.88	-25.12	74.00	200	159	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

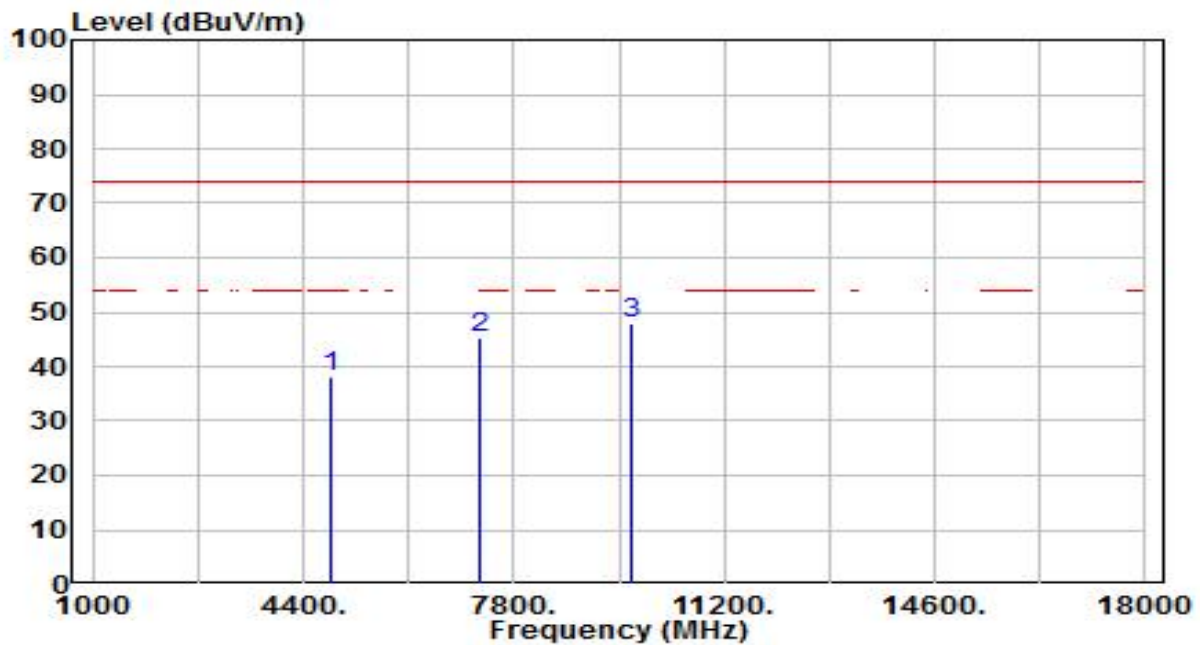


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.27	3.78	38.05	-35.95	74.00	200	0	Peak
2	7266.000	33.67	11.78	45.46	-28.54	74.00	200	336	Peak
3	* 9688.000	31.91	15.84	47.75	-26.25	74.00	200	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

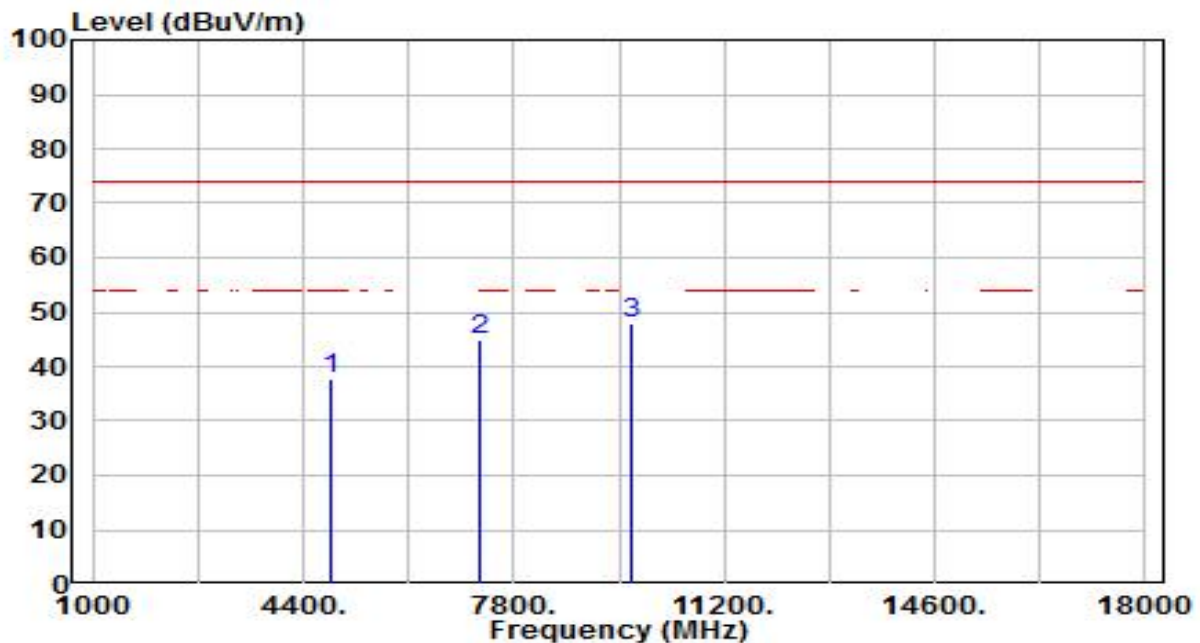


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	33.94	3.78	37.72	-36.28	74.00	200	220	Peak
2	7266.000	33.14	11.78	44.93	-29.07	74.00	200	49	Peak
3	* 9688.000	32.09	15.84	47.94	-26.06	74.00	200	77	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

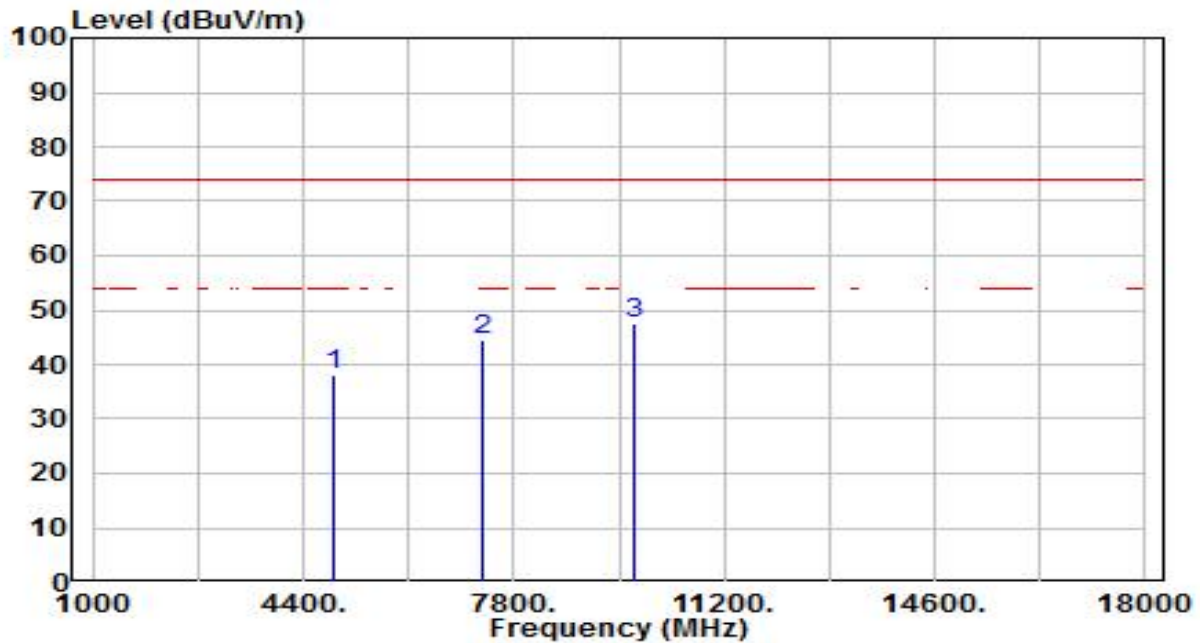


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.28	3.84	38.12	-35.88	74.00	200	319	Peak
2	7311.000	32.49	11.94	44.43	-29.57	74.00	200	145	Peak
3	* 9748.000	31.63	15.95	47.59	-26.41	74.00	200	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

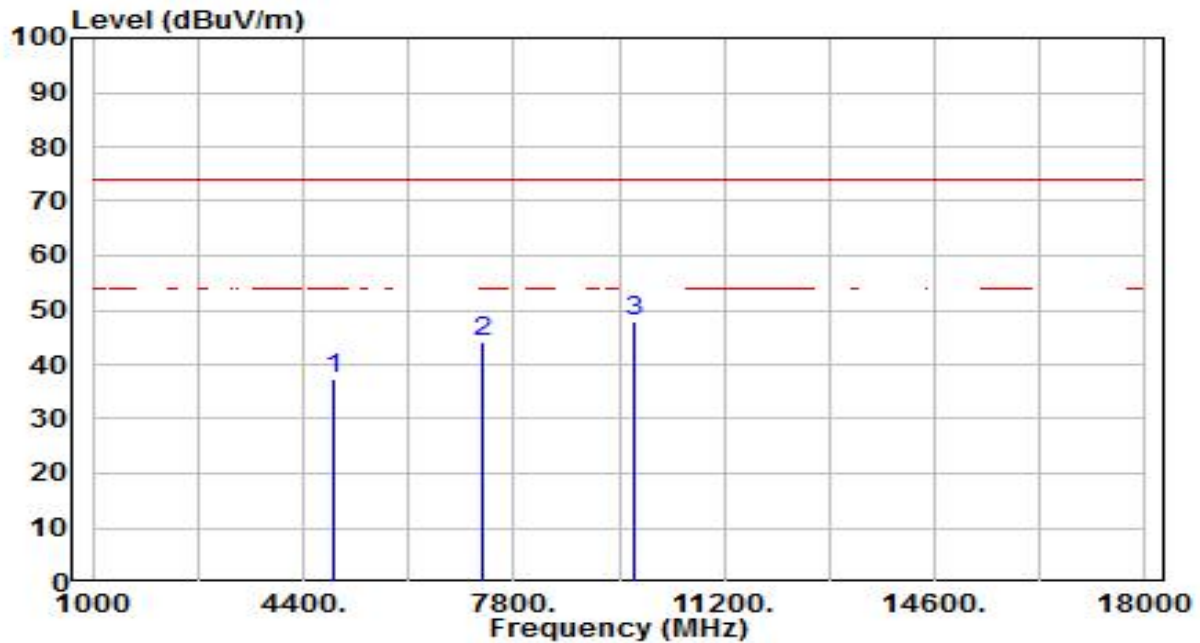


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.42	3.84	37.26	-36.74	74.00	200	230	Peak
2	7311.000	32.31	11.94	44.26	-29.74	74.00	200	116	Peak
3	* 9748.000	31.93	15.95	47.89	-26.11	74.00	200	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

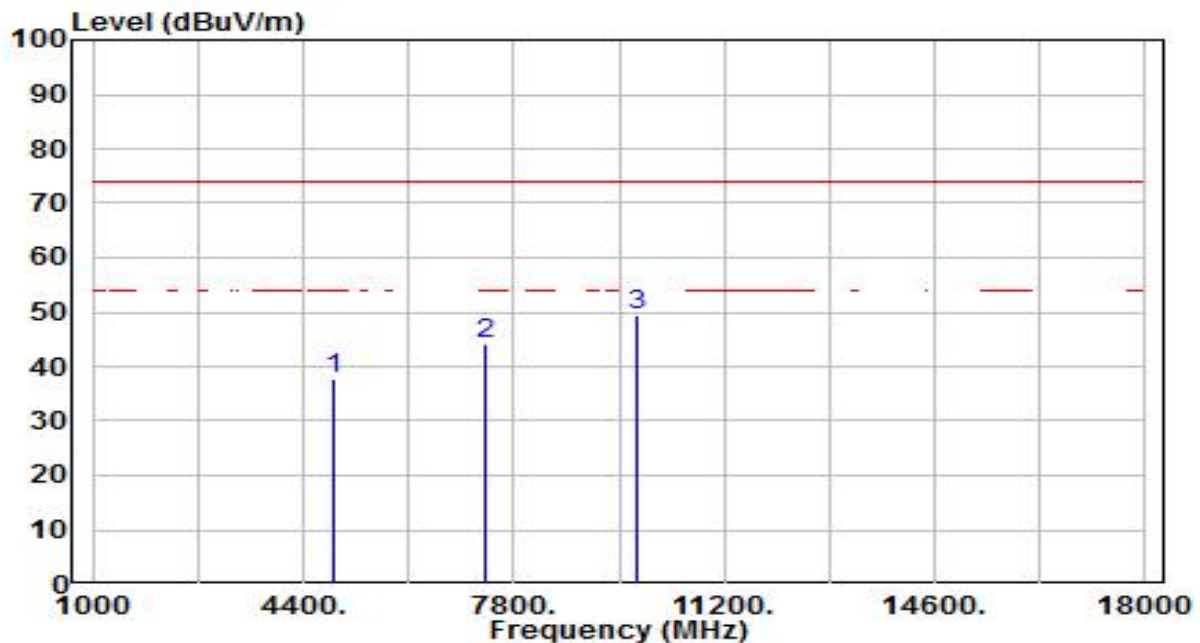


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.01	3.89	37.90	-36.10	74.00	200	123	Peak
2	7356.000	32.20	12.10	44.30	-29.70	74.00	200	137	Peak
3	* 9808.000	33.26	16.06	49.32	-24.68	74.00	200	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

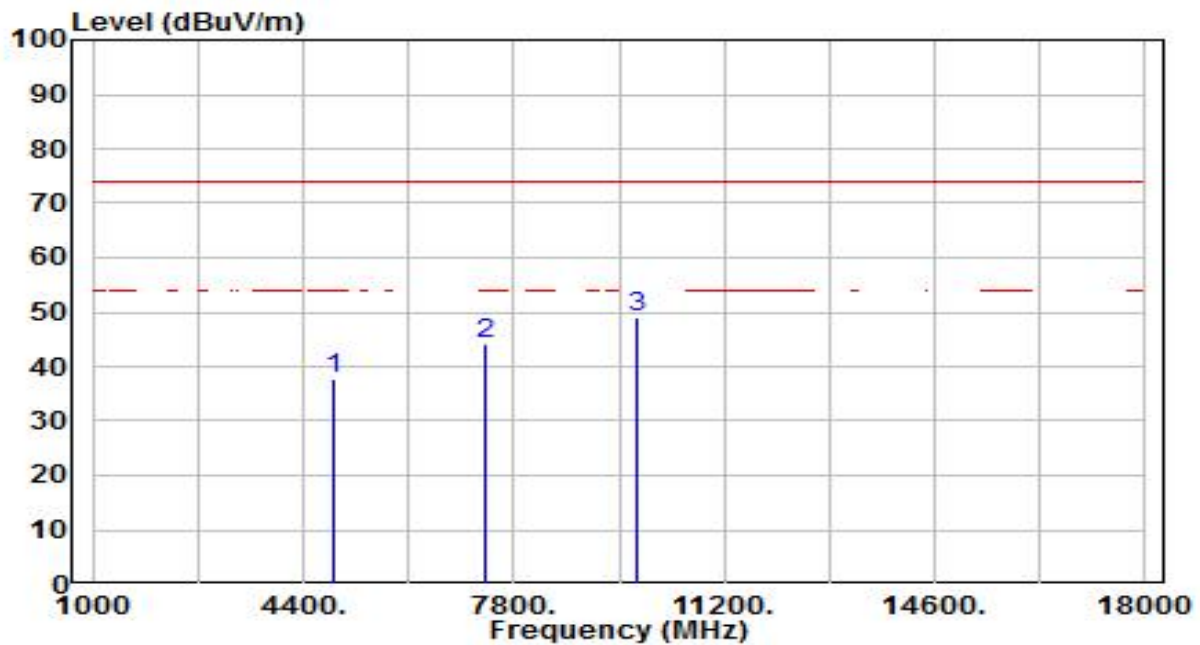


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.78	3.89	37.66	-36.34	74.00	200	311	Peak
2	7356.000	31.98	12.10	44.08	-29.92	74.00	200	200	Peak
3	* 9808.000	33.02	16.06	49.08	-24.92	74.00	200	258	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

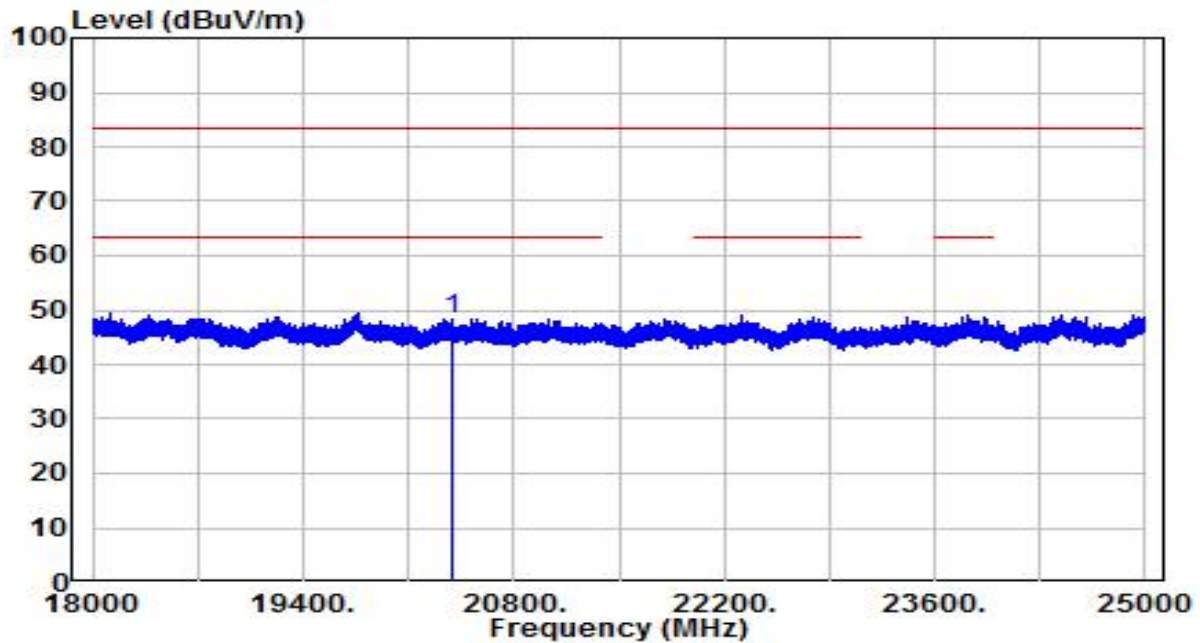


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20398.160	37.66	10.75	48.41	-35.09	83.50	150	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

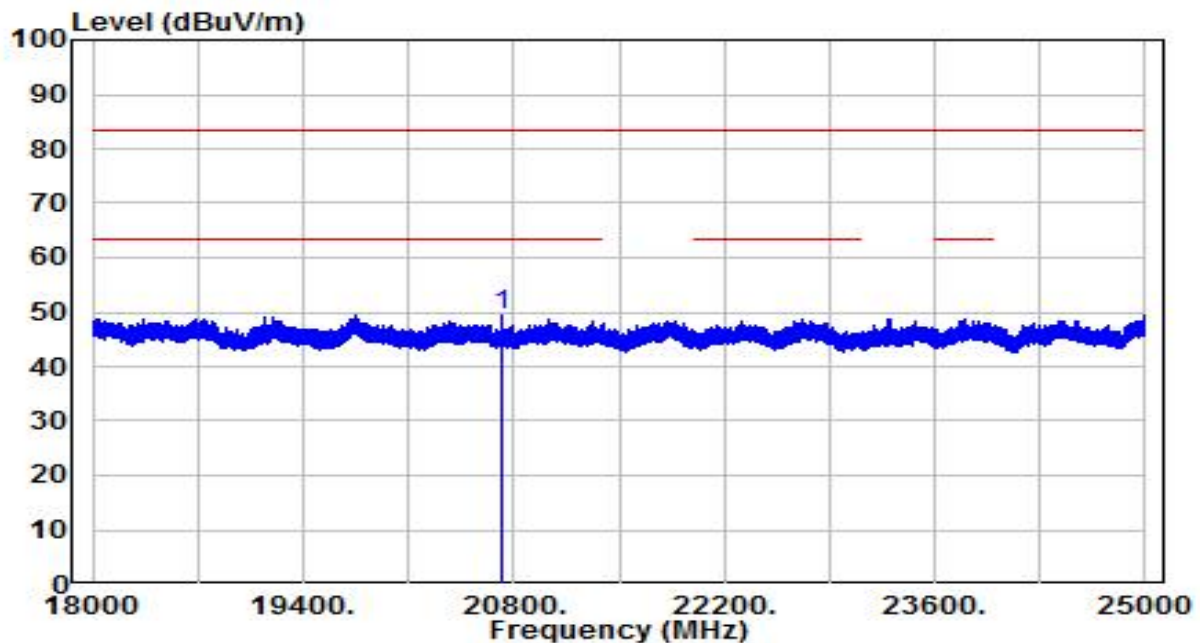


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20719.720	38.56	10.88	49.44	-34.06	83.50	150	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

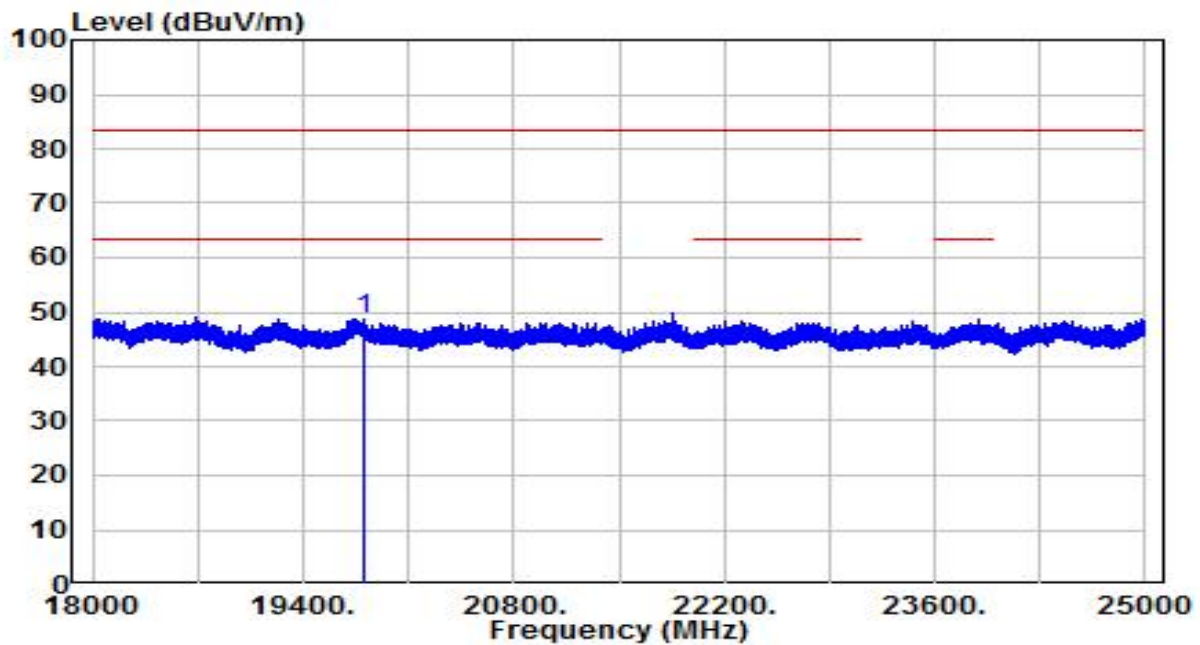


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	19809.720	37.72	10.95	48.67	-34.83	83.50	150	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

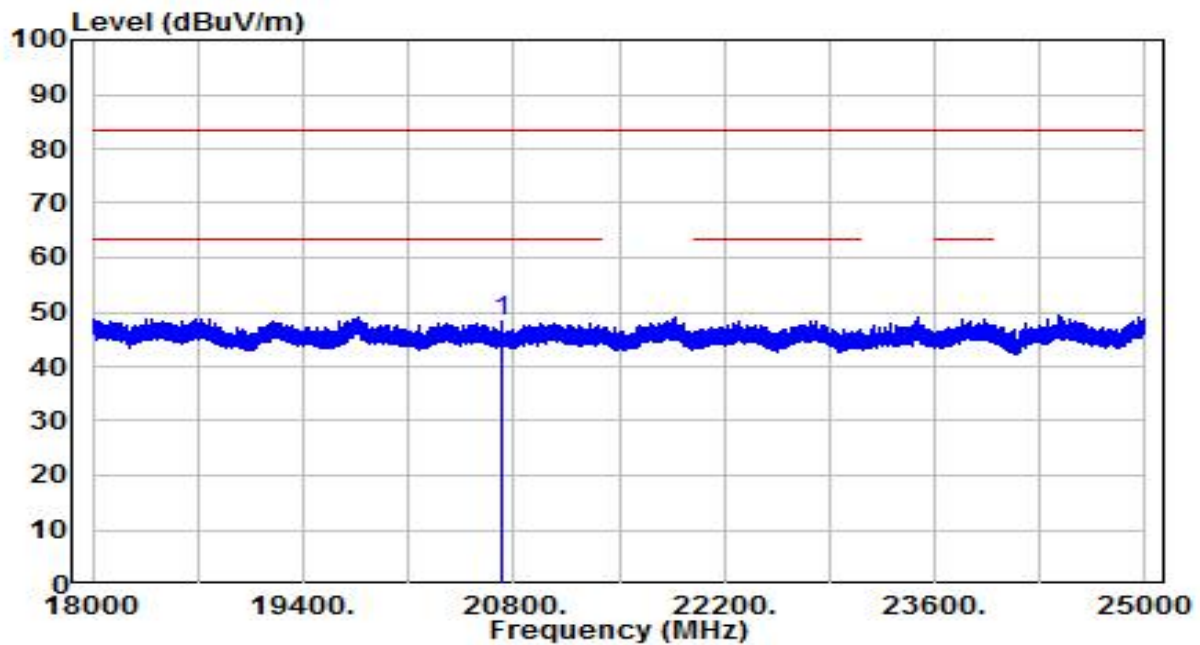

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20719.940	37.33	10.88	48.21	-35.29	83.50	150	53	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

7.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4. Test Setup

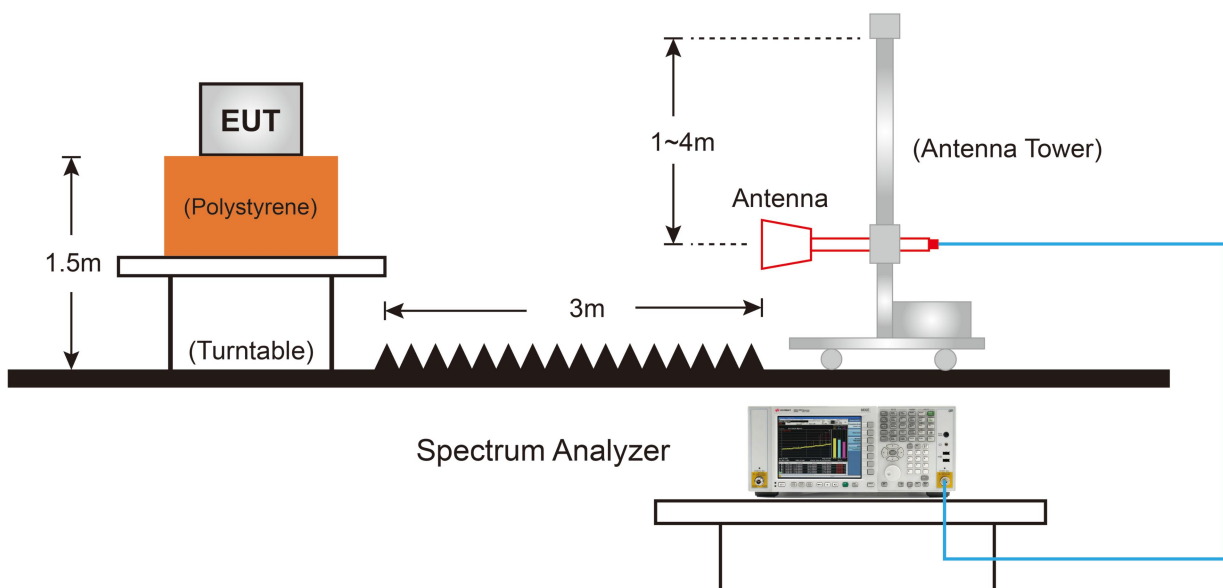

7.7.5. Test Result

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

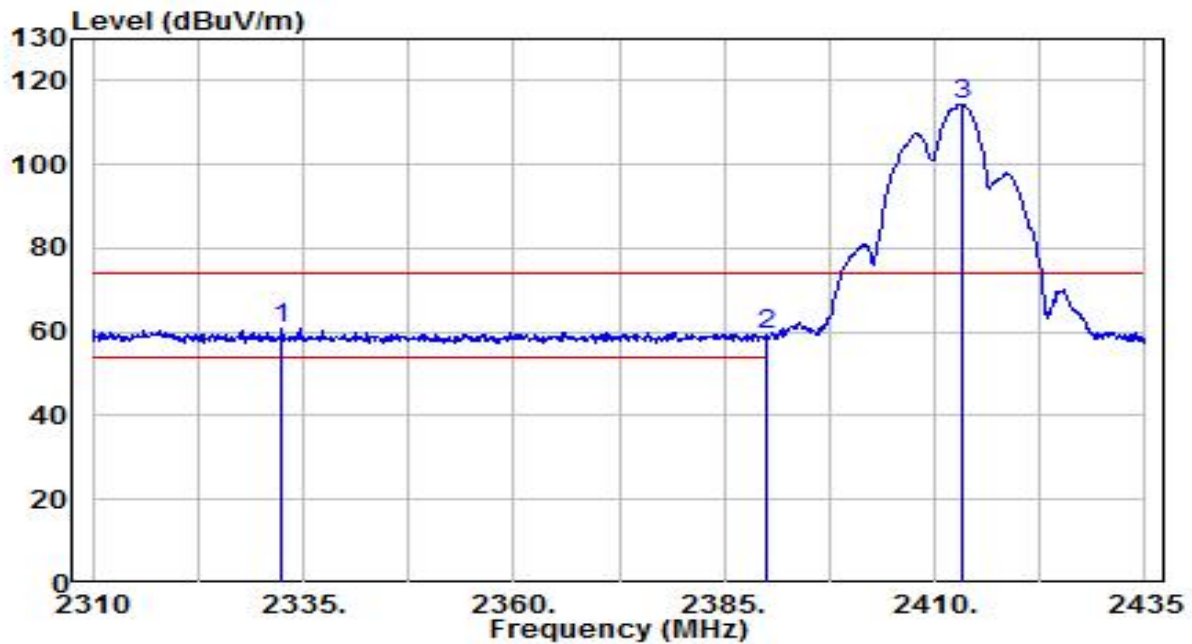


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2332.500	29.12	31.73	60.86	-13.14	74.00	160	220	Peak
2		2390.000	27.30	31.95	59.24	-14.76	74.00	160	220	Peak
3		2413.125	82.46	32.04	114.50	N/A	N/A	160	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

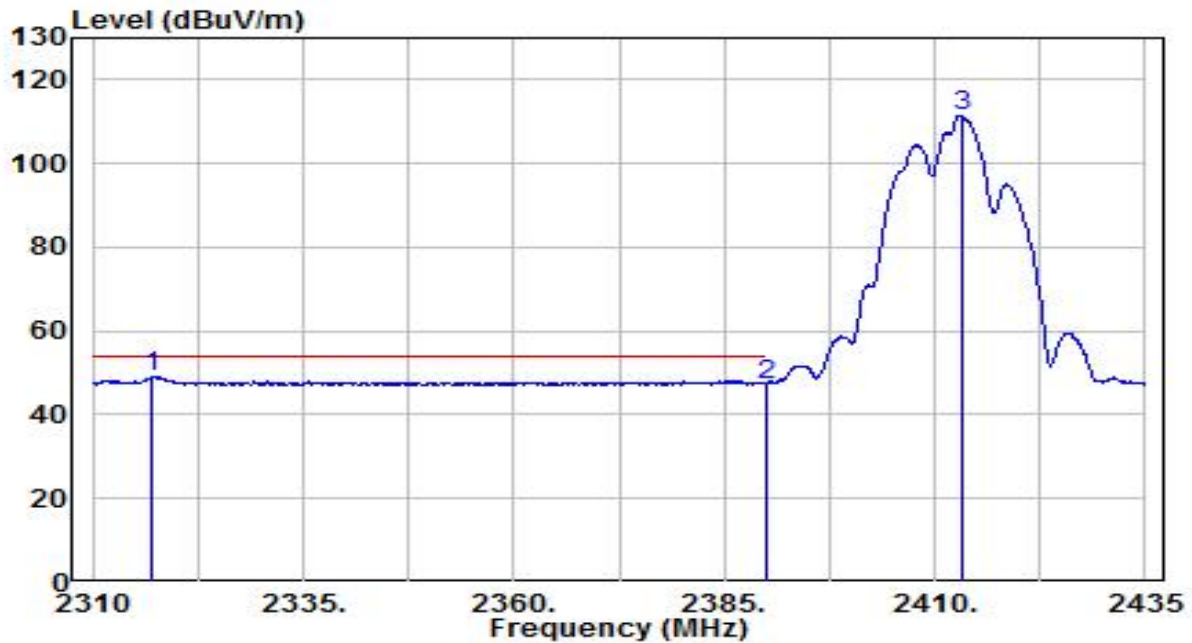


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2317.125	17.37	31.68	49.05	-4.95	54.00	160	220	Average
2		2390.000	15.38	31.95	47.33	-6.67	54.00	160	220	Average
3		2413.125	79.52	32.04	111.56	N/A	N/A	160	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

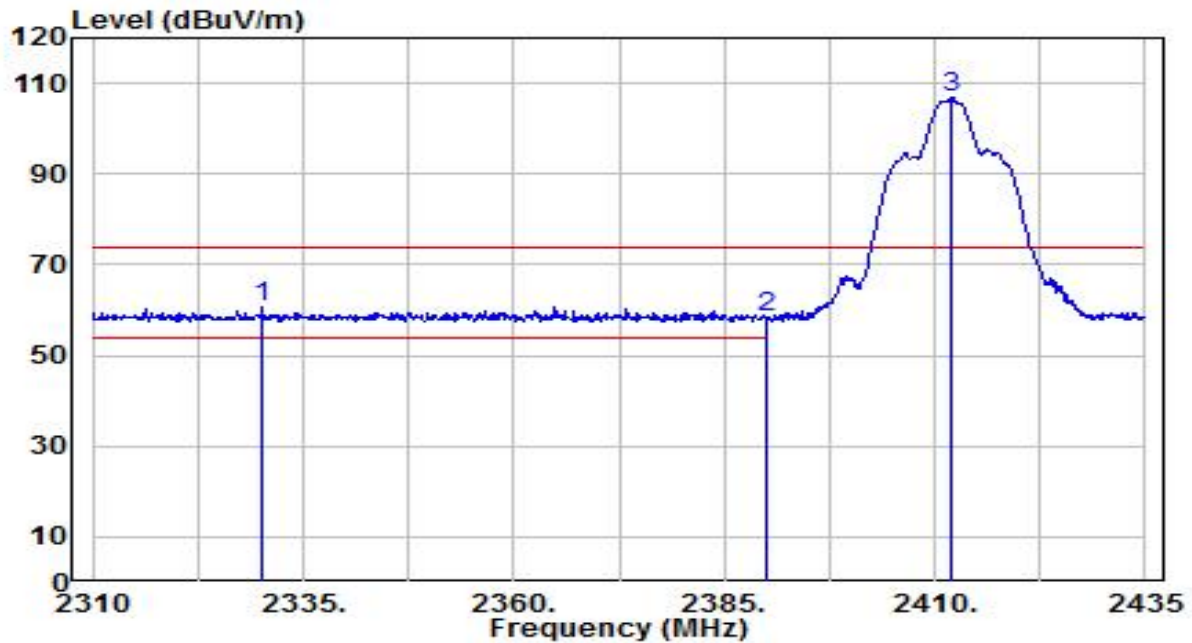


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2330.250	29.15	31.73	60.87	-13.13	74.00	190	210	Peak
2		2390.000	26.49	31.95	58.44	-15.56	74.00	190	210	Peak
3		2412.000	74.74	32.03	106.77	N/A	N/A	190	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

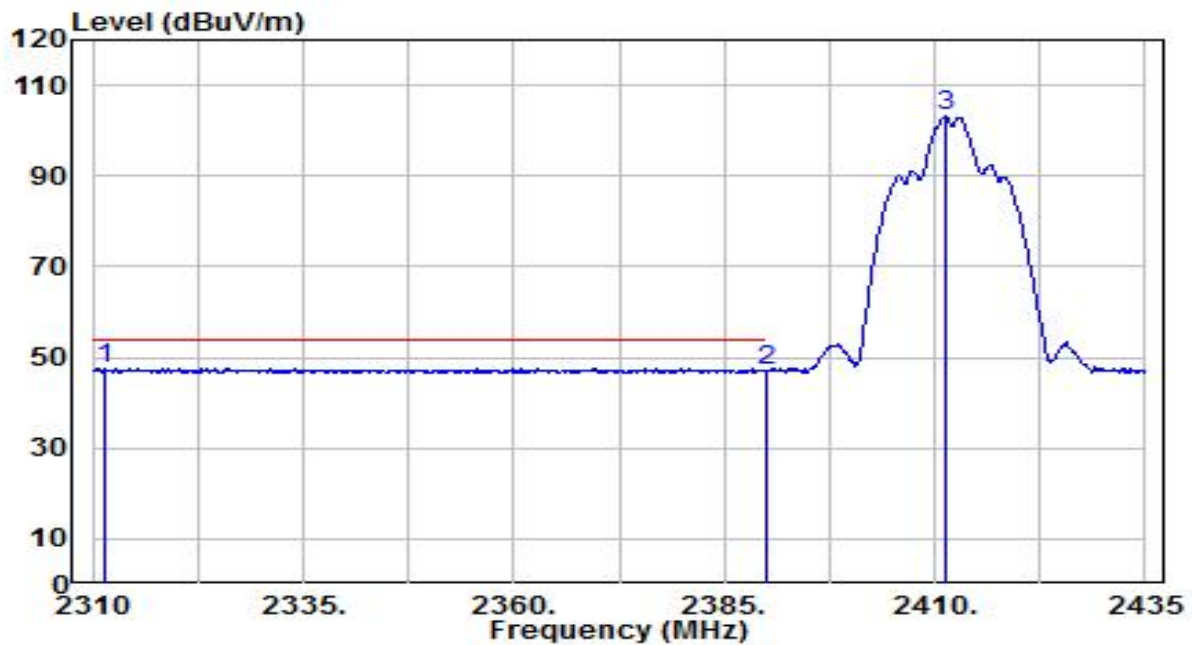


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2311.375	15.97	31.65	47.63	-6.37	54.00	190	210	Average
2		2390.000	15.07	31.95	47.02	-6.98	54.00	190	210	Average
3		2411.250	71.10	32.03	103.13	N/A	N/A	190	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

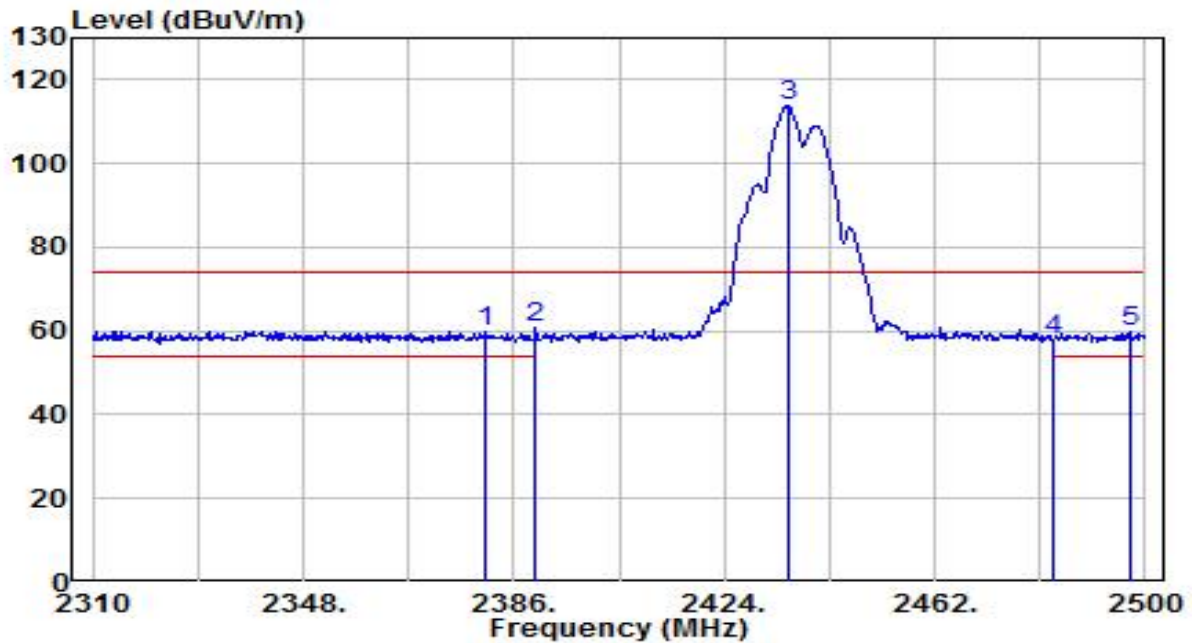


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2380.680	28.08	31.91	59.99	-14.01	74.00	175	270	Peak
2	* 2390.000	28.68	31.95	60.62	-13.38	74.00	175	270	Peak
3	2435.400	81.70	32.12	113.82	N/A	N/A	175	270	Peak
4	2483.500	25.74	32.30	58.04	-15.96	74.00	175	270	Peak
5	2497.530	27.28	32.35	59.63	-14.37	74.00	175	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

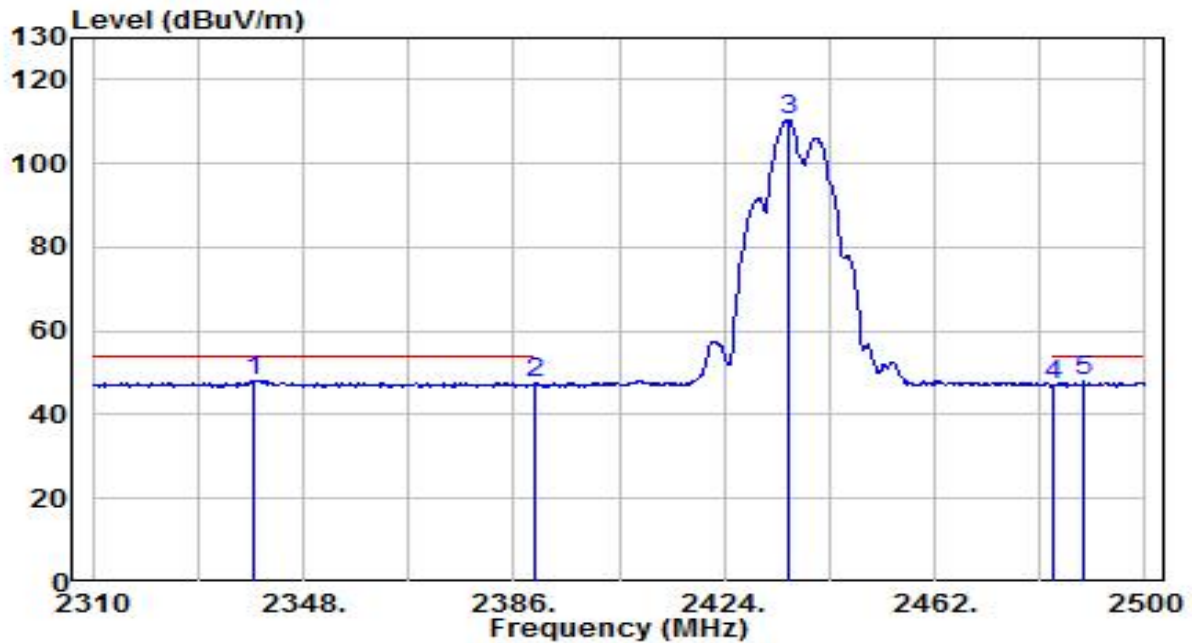


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.070	16.52	31.76	48.27	-5.73	54.00	175	270	Average
2		2390.000	15.51	31.95	47.46	-6.54	54.00	175	270	Average
3		2435.590	78.37	32.12	110.49	N/A	N/A	175	270	Average
4		2483.500	14.86	32.30	47.16	-6.84	54.00	175	270	Average
5		2488.980	15.52	32.32	47.84	-6.16	54.00	175	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

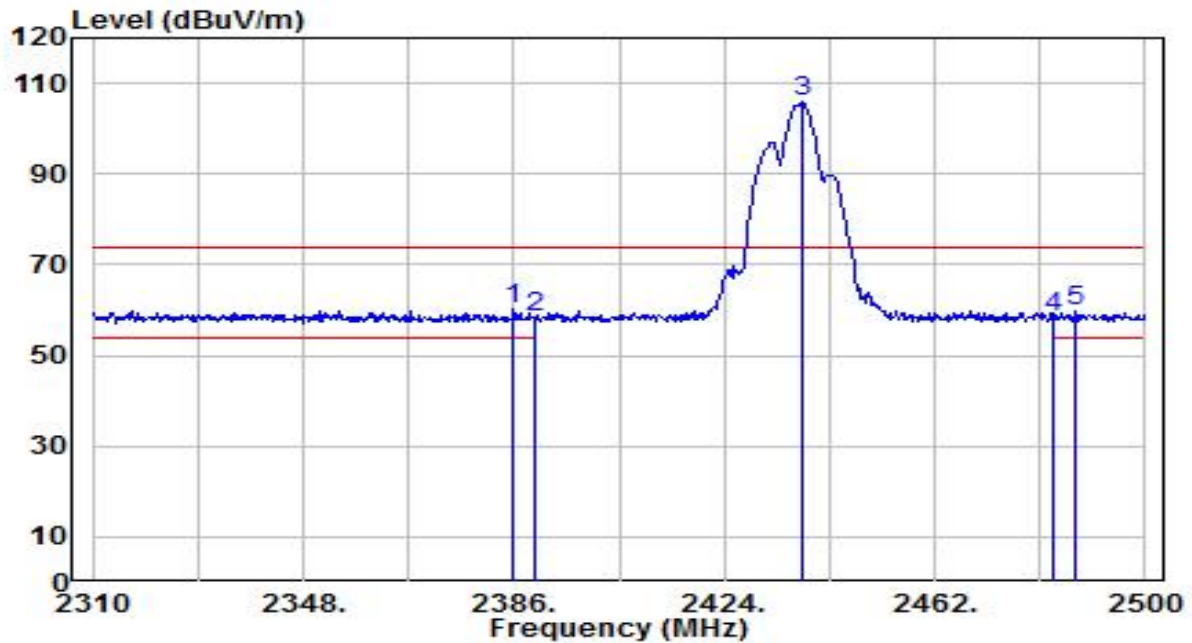


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.000	28.29	31.93	60.22	-13.78	74.00	130	215	Peak
2		2390.000	26.63	31.95	58.58	-15.42	74.00	130	215	Peak
3		2438.060	73.79	32.13	105.92	N/A	N/A	130	215	Peak
4		2483.500	26.29	32.30	58.58	-15.42	74.00	130	215	Peak
5		2487.270	27.44	32.31	59.75	-14.25	74.00	130	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

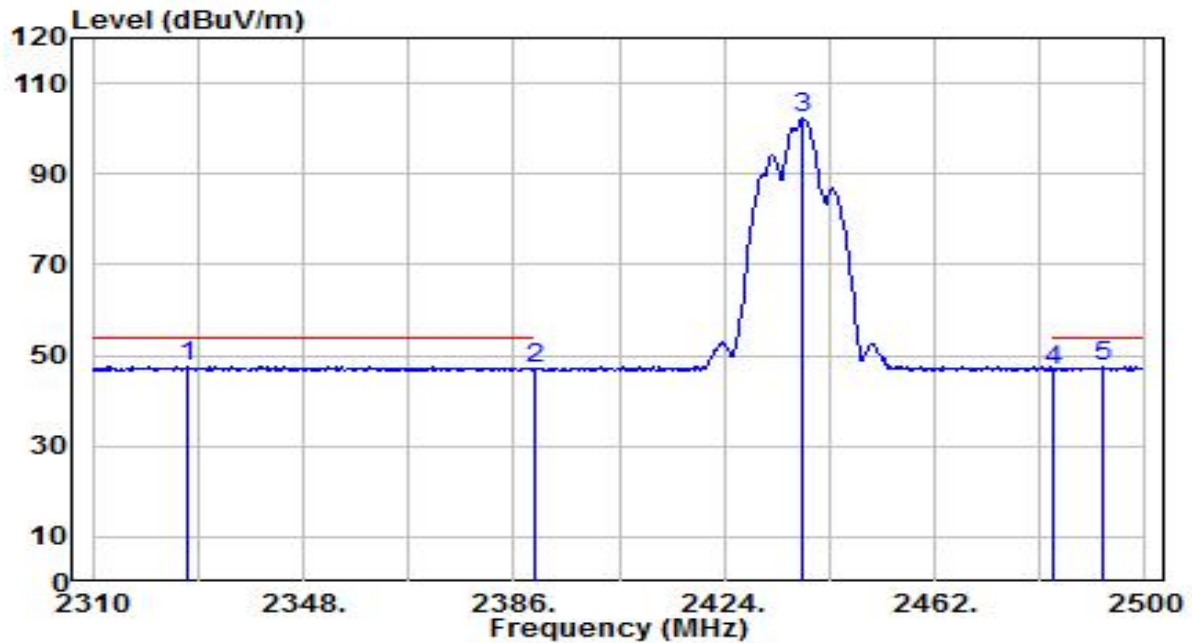


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2326.910	15.87	31.71	47.58	-6.42	54.00	130	215	Average
2	2390.000	15.10	31.95	47.05	-6.95	54.00	130	215	Average
3	2438.060	70.18	32.13	102.31	N/A	N/A	130	215	Average
4	2483.500	14.55	32.30	46.85	-7.15	54.00	130	215	Average
5	* 2492.210	15.26	32.33	47.59	-6.41	54.00	130	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

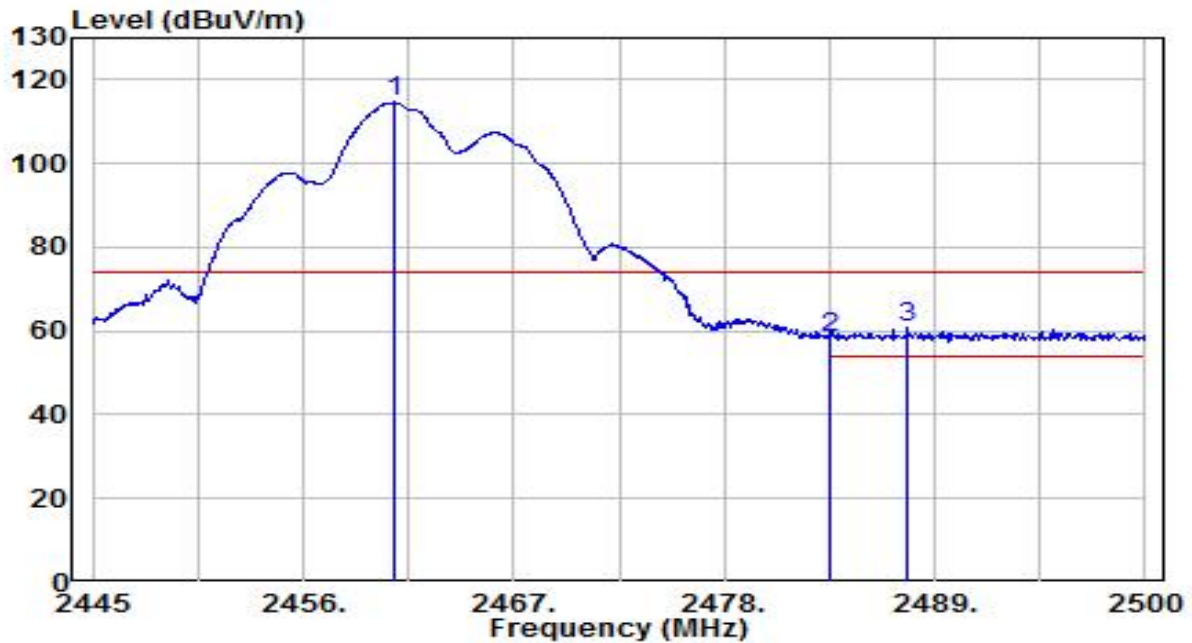


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.730	82.34	32.21	114.55	N/A	N/A	135	185	Peak
2	2483.500	26.21	32.30	58.51	-15.49	74.00	135	185	Peak
3	* 2487.625	28.76	32.31	61.07	-12.93	74.00	135	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

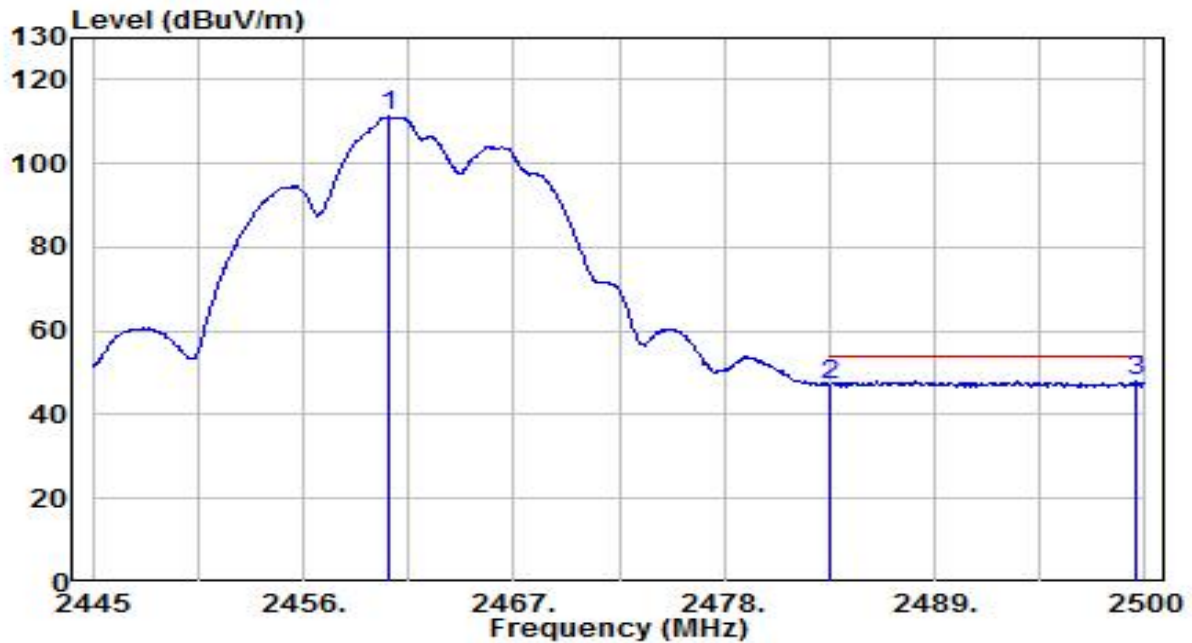


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.510	79.05	32.21	111.26	N/A	N/A	135	185	Average
2	2483.500	14.78	32.30	47.08	-6.92	54.00	135	185	Average
3	* 2499.560	15.69	32.36	48.05	-5.95	54.00	135	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

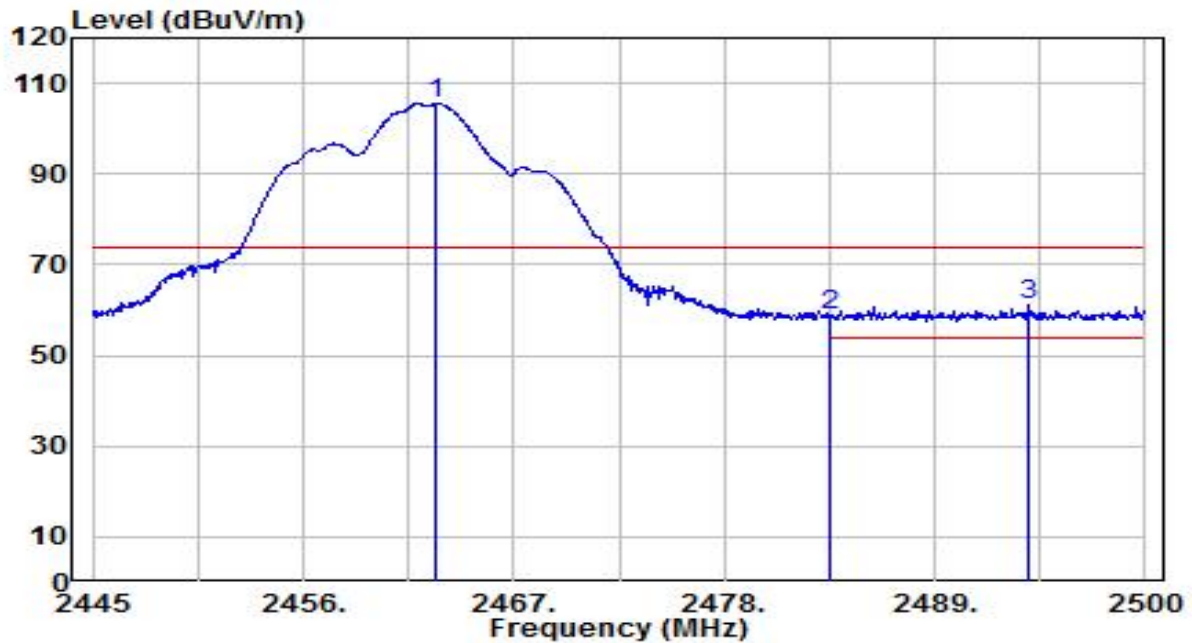


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.985	73.31	32.22	105.53	N/A	N/A	145	215	Peak
2	2483.500	26.61	32.30	58.91	-15.09	74.00	145	215	Peak
3	* 2493.950	28.78	32.34	61.12	-12.88	74.00	145	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

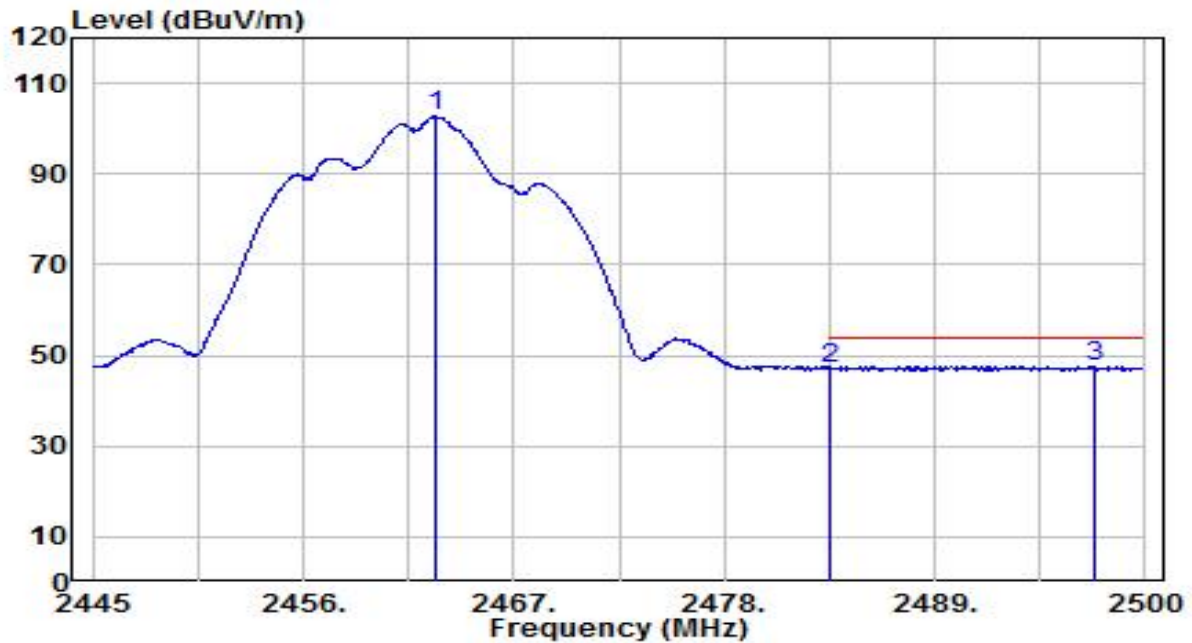


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.875	70.47	32.22	102.69	N/A	N/A	145	215	Average
2	2483.500	14.67	32.30	46.97	-7.03	54.00	145	215	Average
3	* 2497.360	15.42	32.35	47.77	-6.23	54.00	145	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

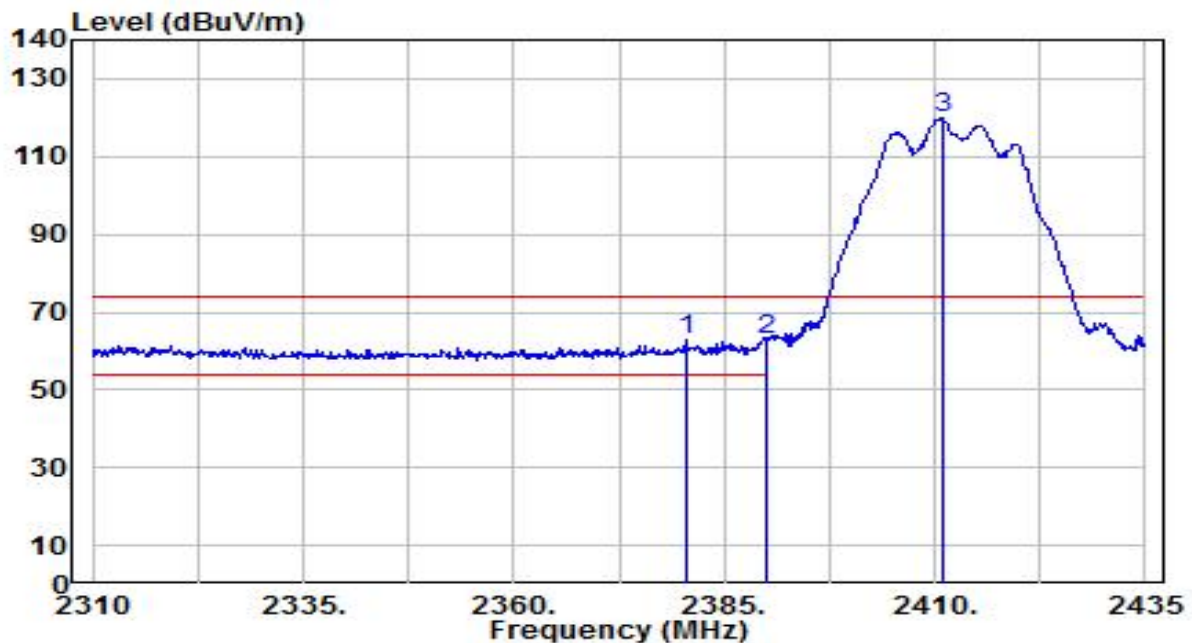


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.375	30.95	31.91	62.86	-11.14	74.00	200	215	Peak
2		2390.000	30.89	31.95	62.84	-11.16	74.00	200	215	Peak
3		2410.875	87.82	32.03	119.85	N/A	N/A	200	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

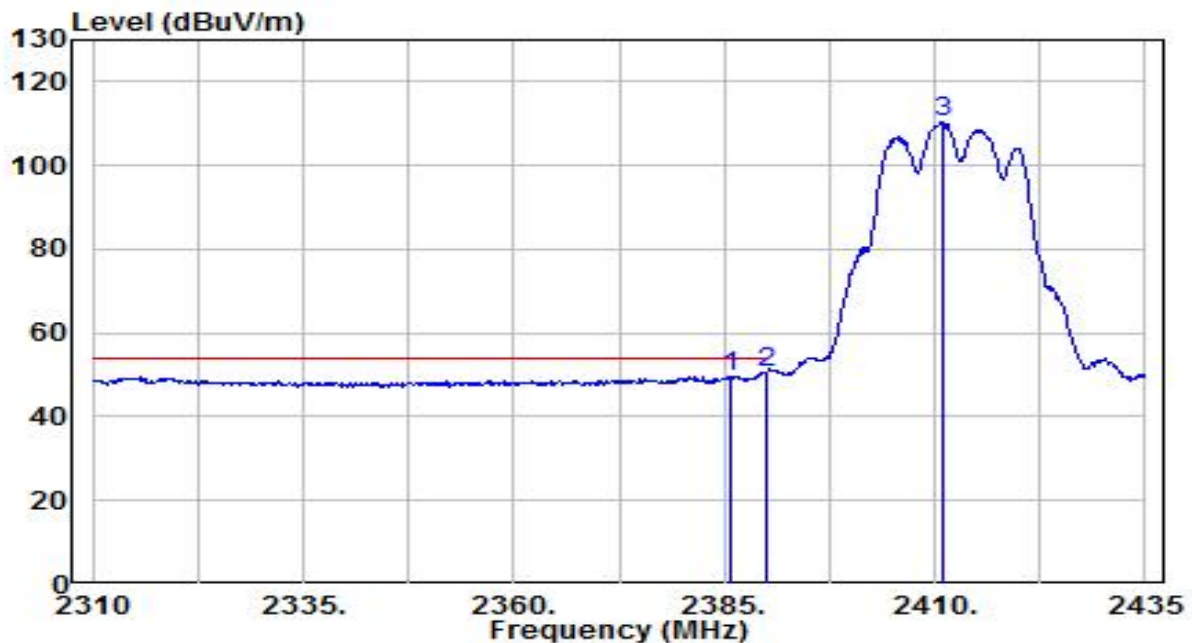


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.625	17.78	31.93	49.72	-4.28	54.00	200	215	Average
2	* 2390.000	18.80	31.95	50.75	-3.25	54.00	200	215	Average
3	2411.125	78.30	32.03	110.32	N/A	N/A	200	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

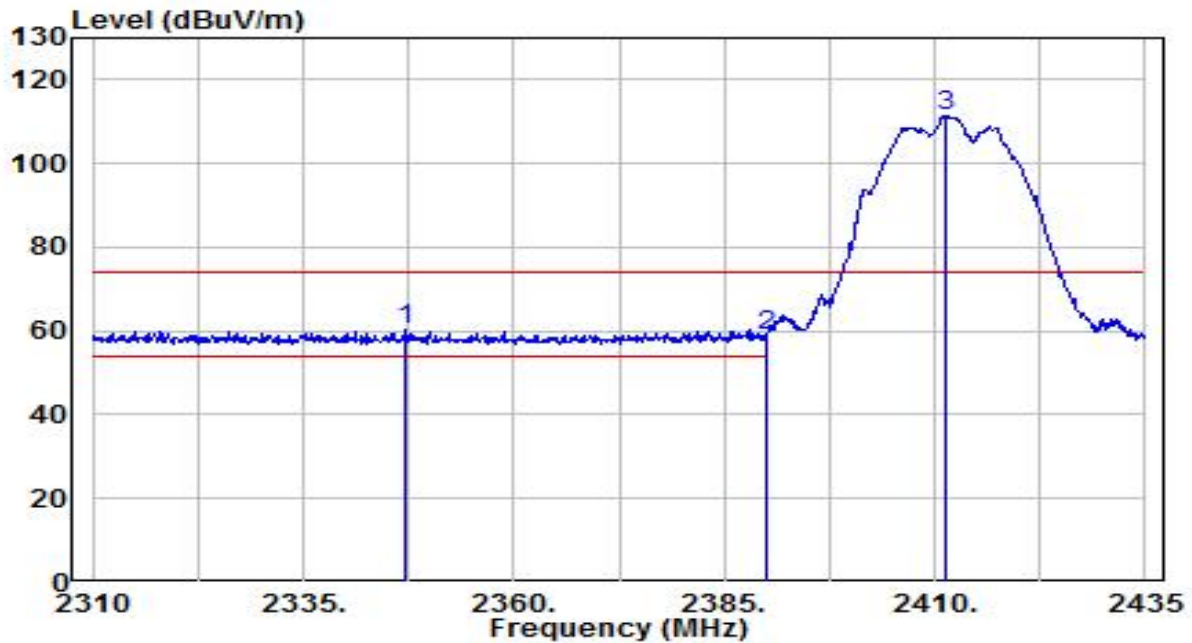


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2347.125	28.32	31.79	60.11	-13.89	74.00	140	210	Peak
2		2390.000	26.97	31.95	58.92	-15.08	74.00	140	210	Peak
3		2411.375	79.44	32.03	111.46	N/A	N/A	140	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

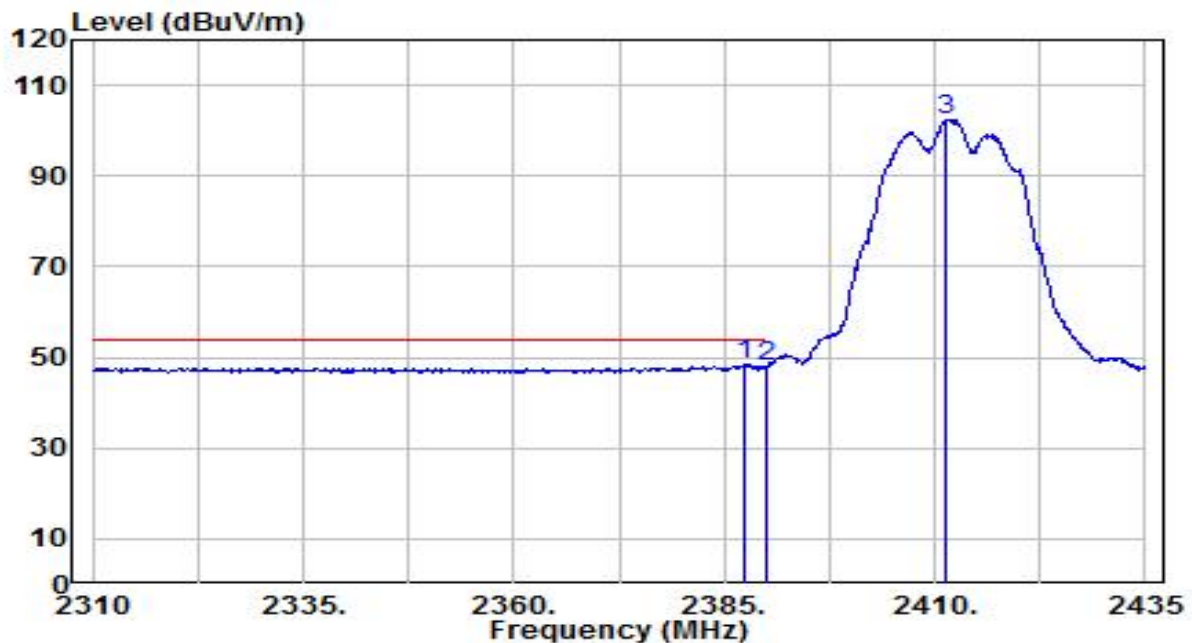


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.500	16.36	31.94	48.30	-5.70	54.00	140	210	Average
2		2390.000	15.91	31.95	47.86	-6.14	54.00	140	210	Average
3		2411.250	70.52	32.03	102.55	N/A	N/A	140	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

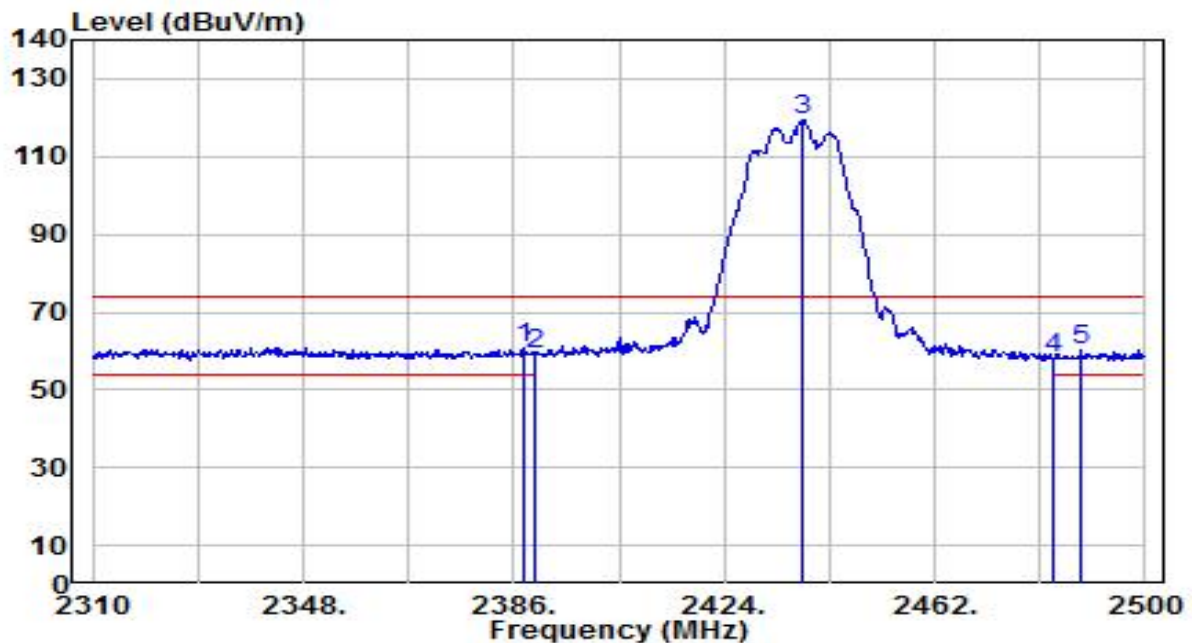


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.710	28.91	31.94	60.85	-13.15	74.00	140	285	Peak
2		2390.000	27.44	31.95	59.39	-14.61	74.00	140	285	Peak
3		2438.060	87.50	32.13	119.63	N/A	N/A	140	285	Peak
4		2483.500	25.95	32.30	58.25	-15.75	74.00	140	285	Peak
5		2488.600	28.03	32.32	60.35	-13.65	74.00	140	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

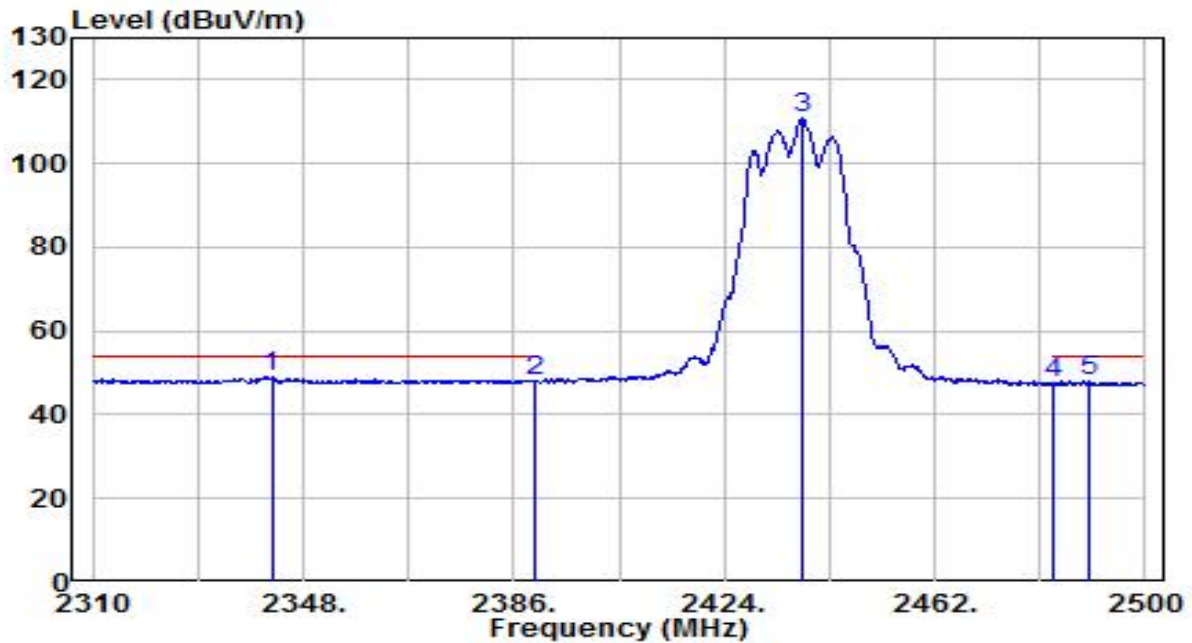


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.300	17.28	31.77	49.05	-4.95	54.00	140	285	Average
2		2390.000	16.11	31.95	48.06	-5.94	54.00	140	285	Average
3		2438.060	78.53	32.13	110.66	N/A	N/A	140	285	Average
4		2483.500	15.15	32.30	47.45	-6.55	54.00	140	285	Average
5		2489.740	15.58	32.32	47.90	-6.10	54.00	140	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

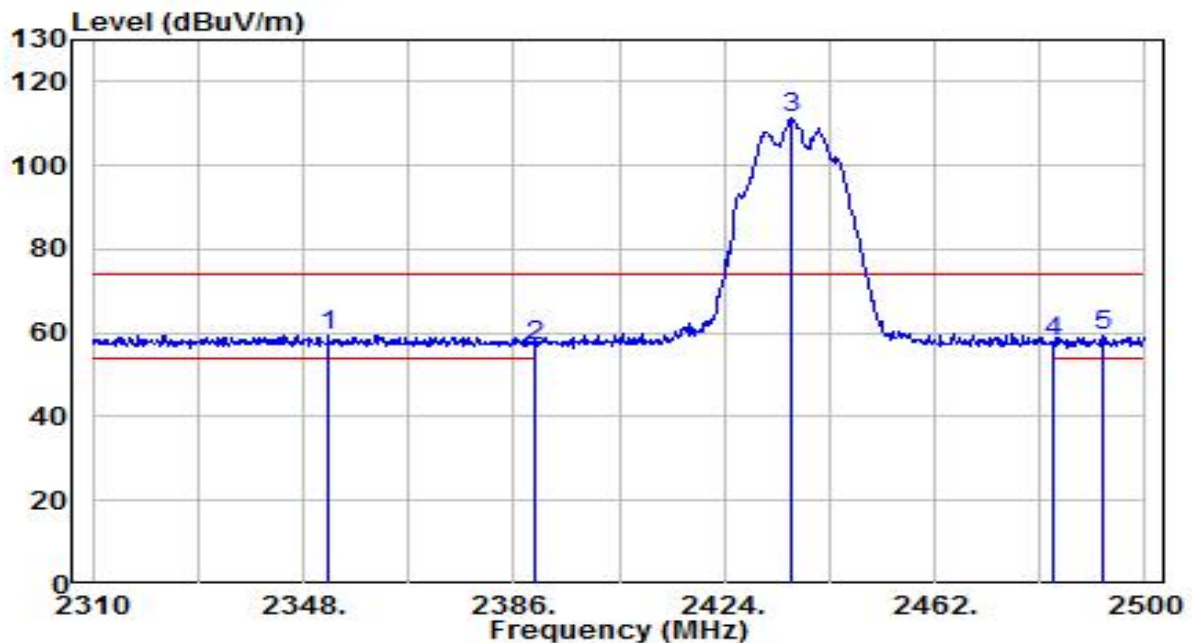


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2352.560	27.73	31.81	59.54	-14.46	74.00	130	215	Peak
2	2390.000	24.78	31.95	56.73	-17.27	74.00	130	215	Peak
3	2436.160	79.27	32.12	111.39	N/A	N/A	130	215	Peak
4	2483.500	25.35	32.30	57.65	-16.35	74.00	130	215	Peak
5	* 2492.210	27.26	32.33	59.59	-14.41	74.00	130	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

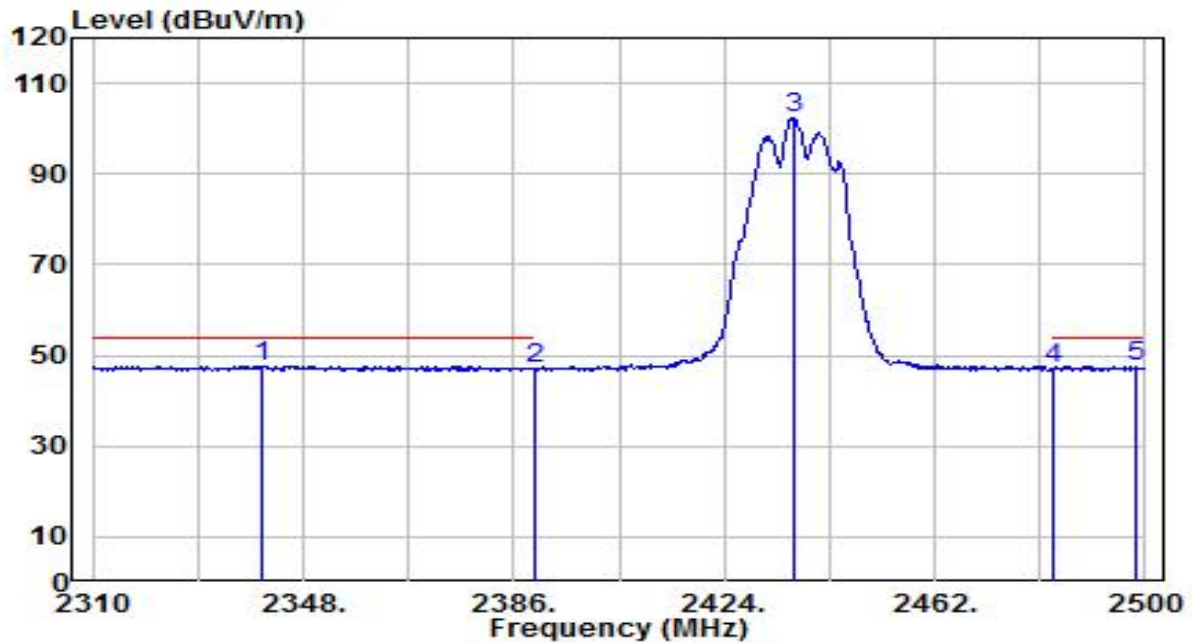


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.780	15.90	31.76	47.66	-6.34	54.00	130	215	Average
2		2390.000	15.00	31.95	46.95	-7.05	54.00	130	215	Average
3		2436.540	70.16	32.12	102.28	N/A	N/A	130	215	Average
4		2483.500	14.88	32.30	47.17	-6.83	54.00	130	215	Average
5		2498.100	15.28	32.35	47.63	-6.37	54.00	130	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

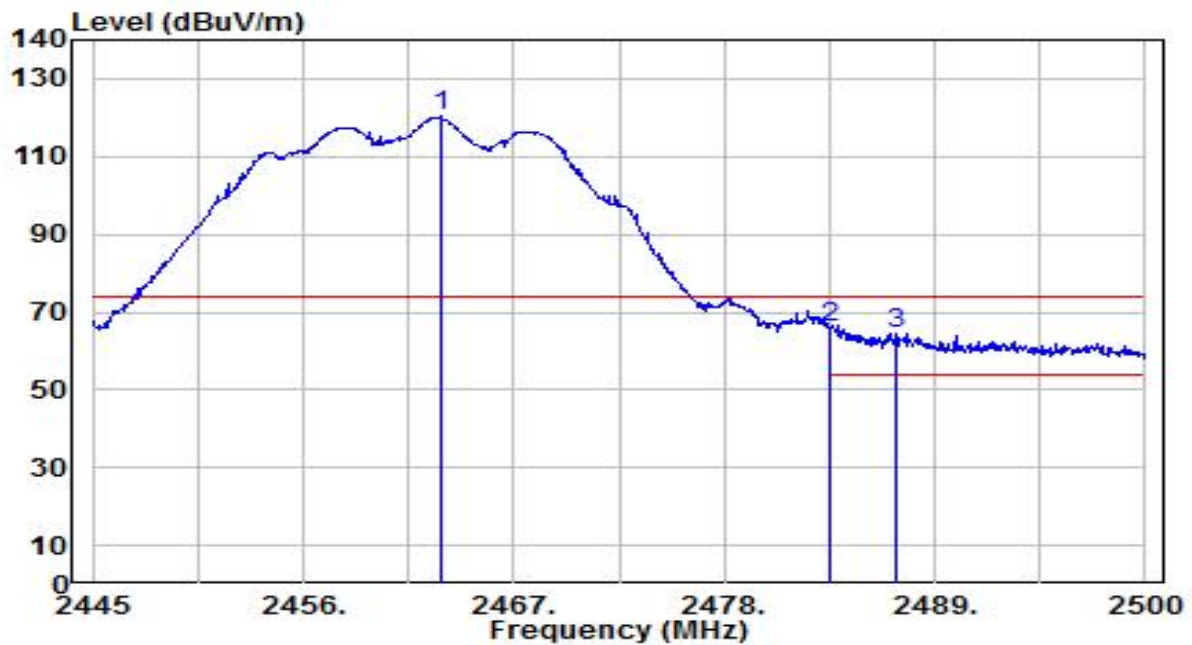


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.260	88.31	32.22	120.53	N/A	N/A	155	185	Peak
2	* 2483.500	33.93	32.30	66.23	-7.77	74.00	155	185	Peak
3	2486.965	32.16	32.31	64.47	-9.53	74.00	155	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

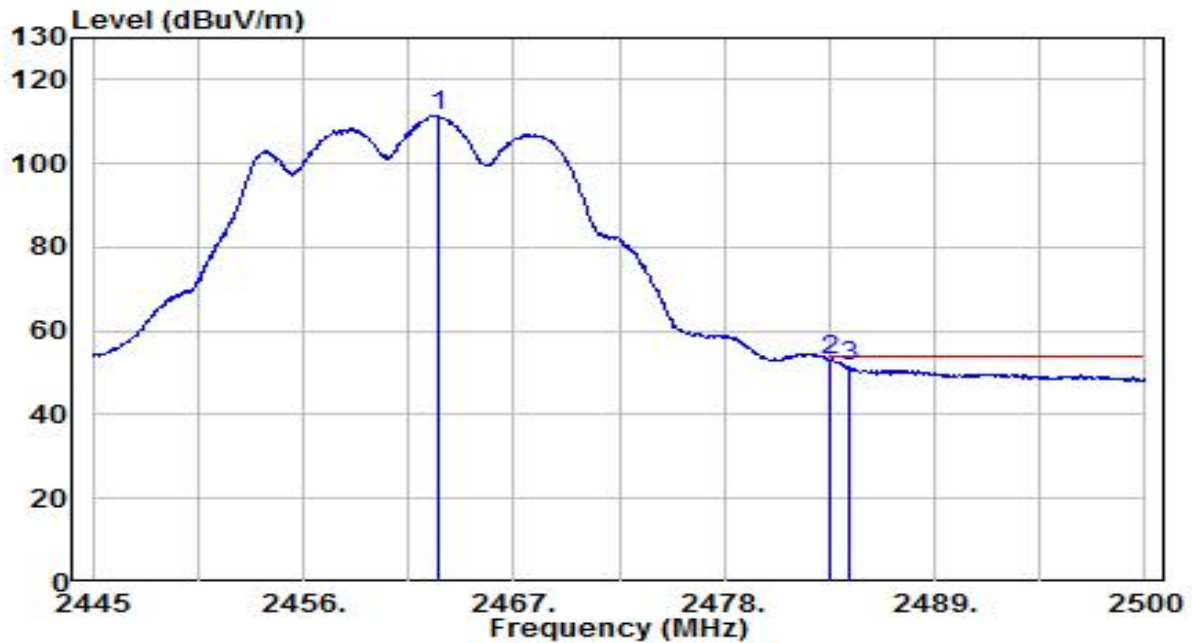


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.095	79.13	32.22	111.35	N/A	N/A	155	185	Average
2	*	2483.500	20.63	32.30	52.93	-1.07	54.00	155	185	Average
3		2484.490	19.01	32.30	51.31	-2.69	54.00	155	185	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

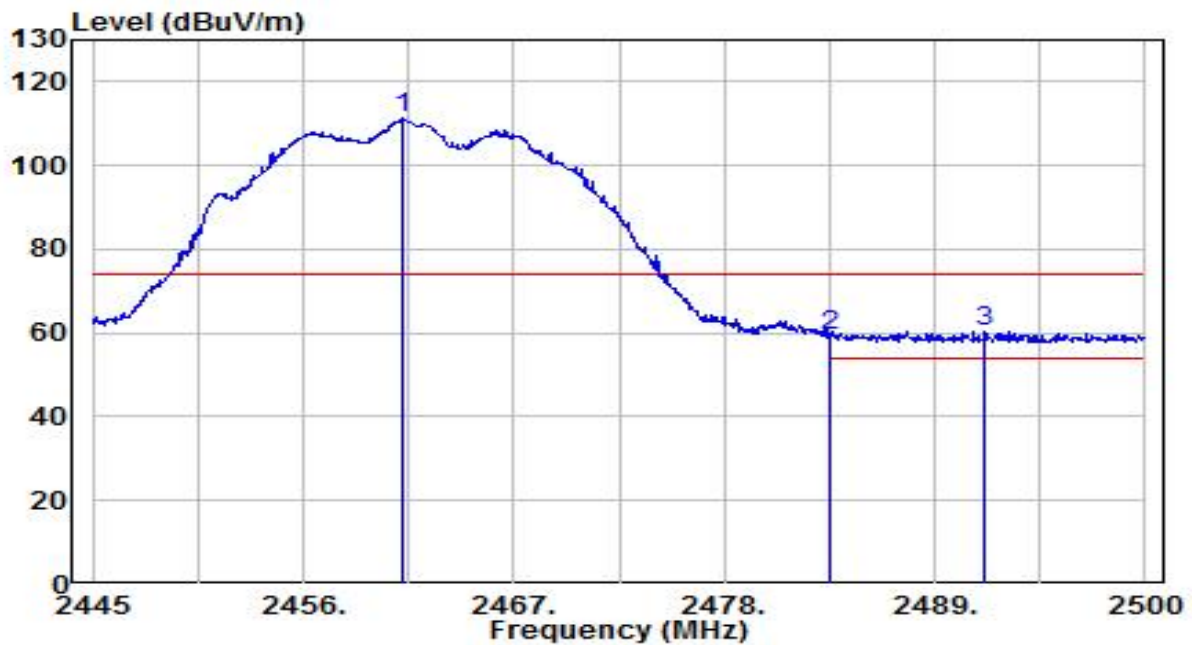


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.170	78.93	32.21	111.15	N/A	N/A	145	215	Peak
2	2483.500	26.83	32.30	59.13	-14.87	74.00	145	215	Peak
3	* 2491.585	28.20	32.33	60.53	-13.47	74.00	145	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

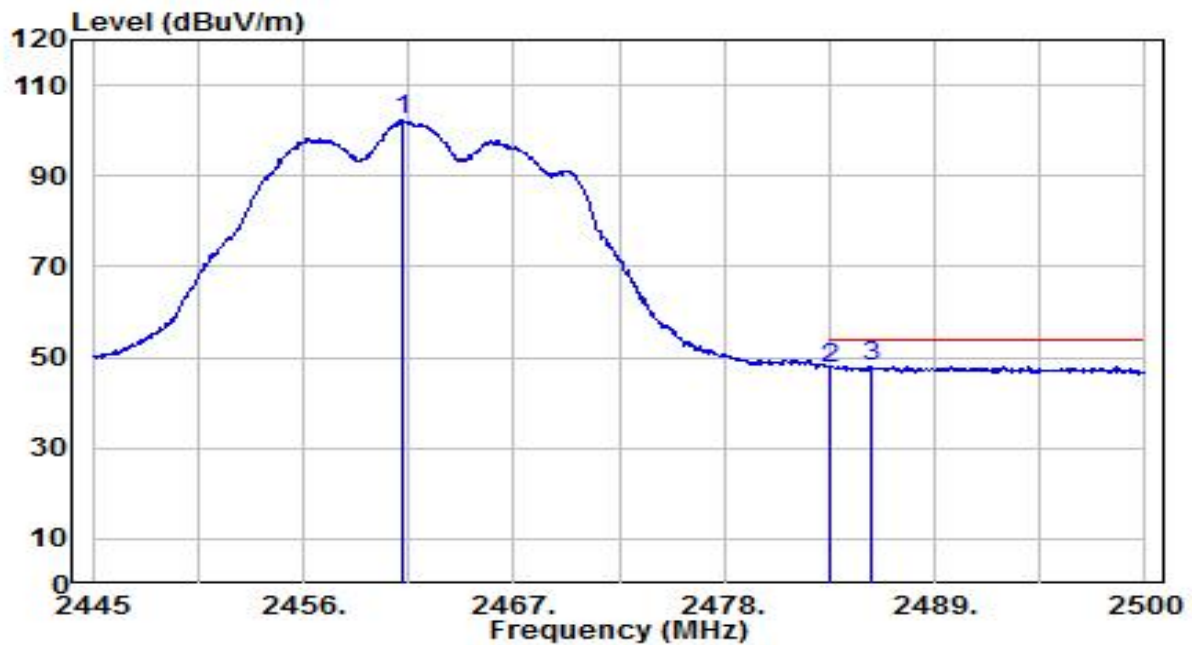


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.170	70.12	32.21	102.34	N/A	N/A	145	215	Average
2	2483.500	15.46	32.30	47.76	-6.24	54.00	145	215	Average
3	* 2485.645	15.77	32.31	48.08	-5.92	54.00	145	215	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

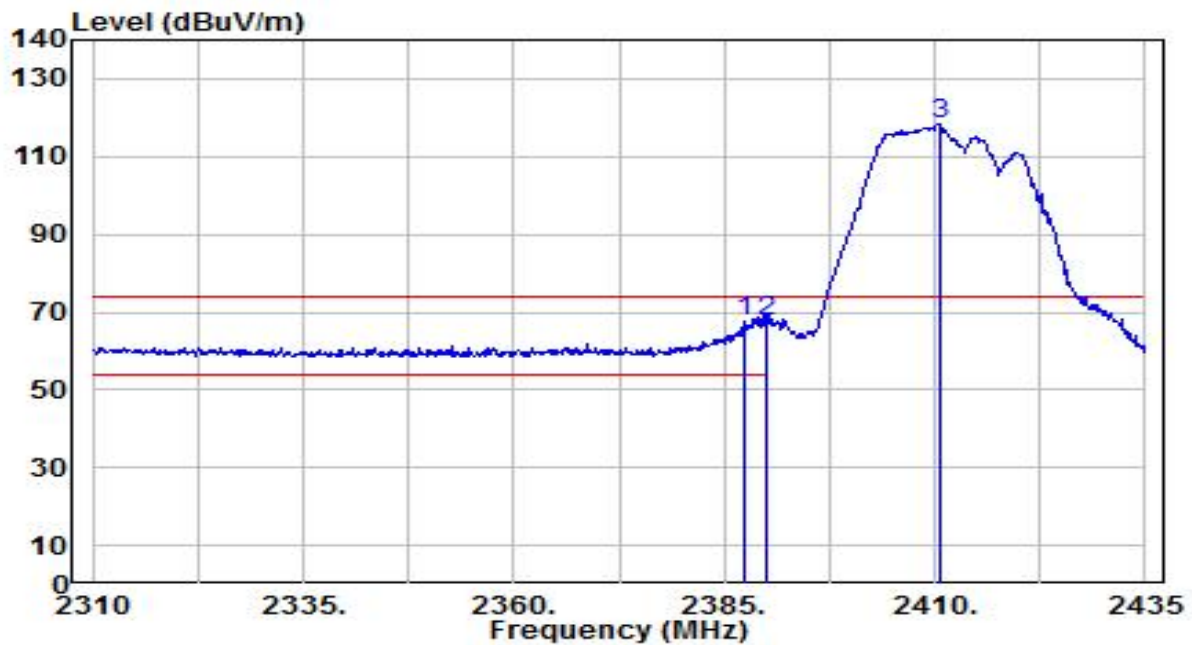


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.500	35.61	31.94	67.55	-6.45	74.00	195	200	Peak
2		2390.000	35.45	31.95	67.40	-6.60	74.00	195	200	Peak
3		2410.500	86.47	32.03	118.50	N/A	N/A	195	200	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

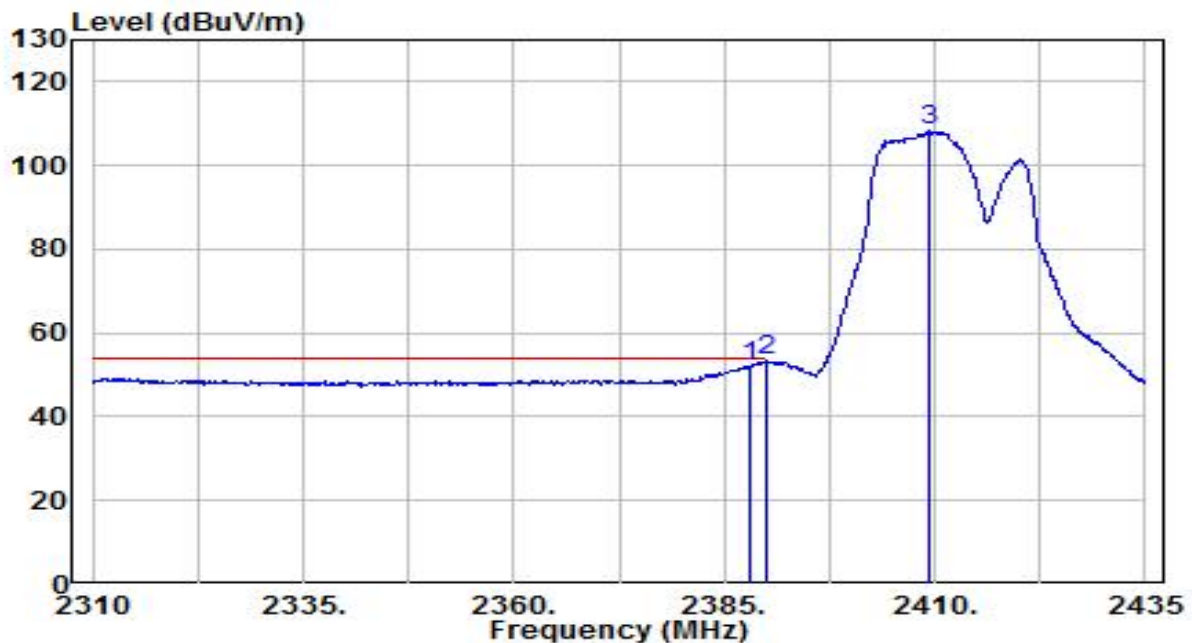


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	20.15	31.94	52.09	-1.91	54.00	195	200	Average
2	* 2390.000	21.42	31.95	53.37	-0.63	54.00	195	200	Average
3	2409.500	76.15	32.02	108.17	N/A	N/A	195	200	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

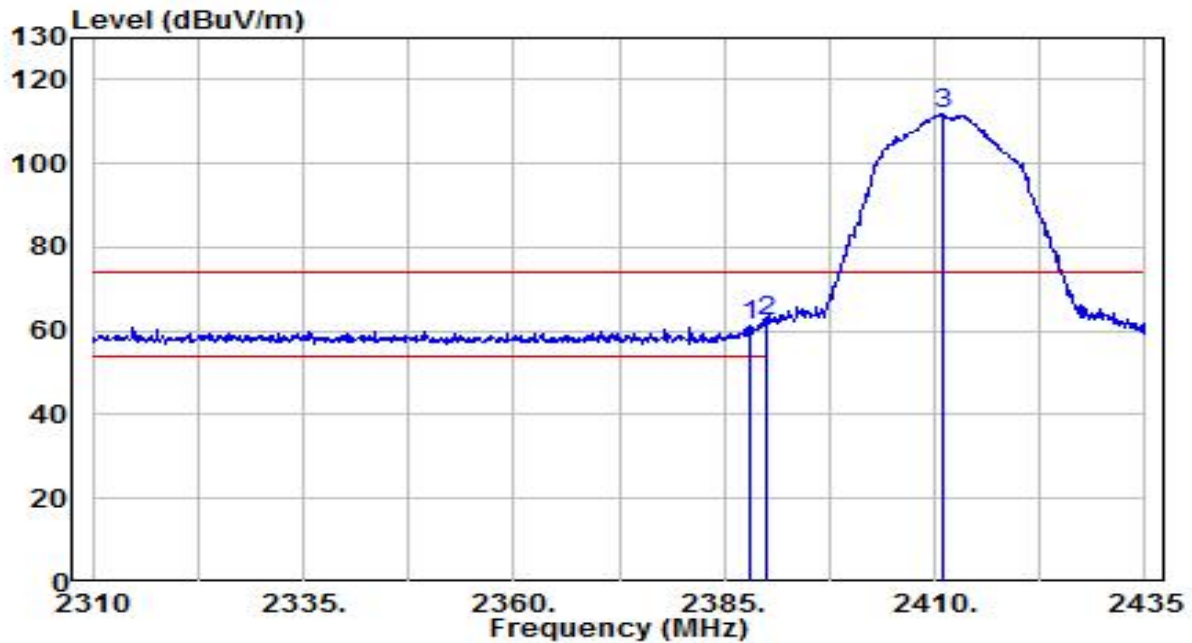


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	29.44	31.94	61.38	-12.62	74.00	150	180	Peak
2	* 2390.000	30.14	31.95	62.09	-11.91	74.00	150	180	Peak
3	2411.000	79.83	32.03	111.86	N/A	N/A	150	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

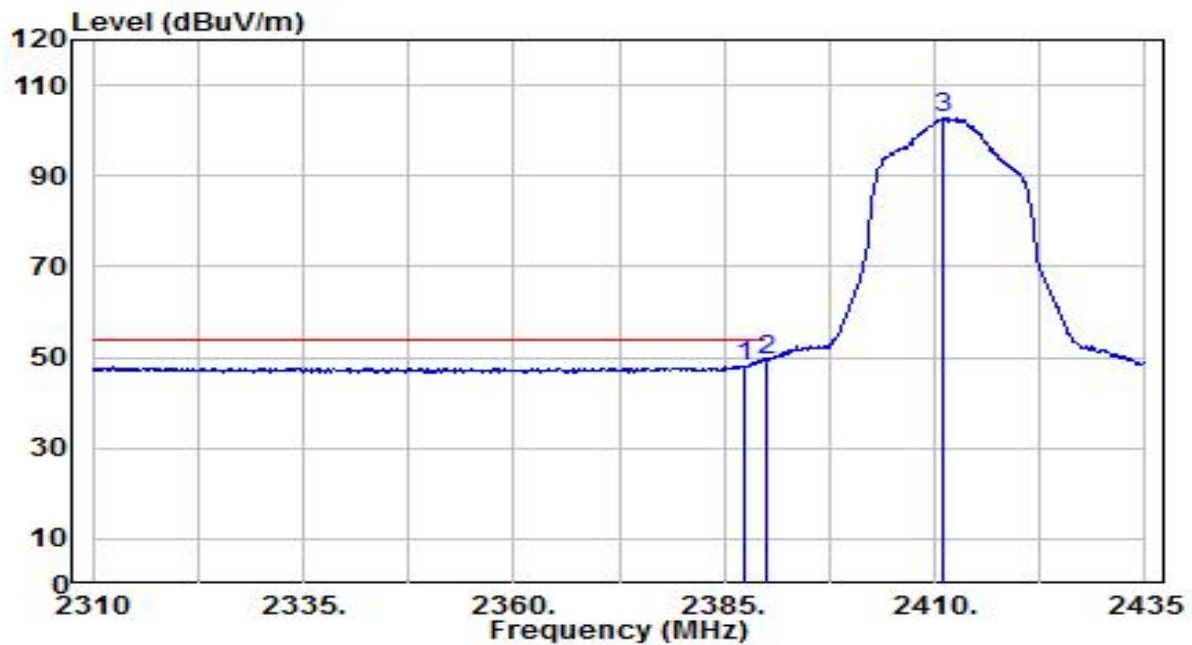


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.375	16.29	31.94	48.23	-5.77	54.00	150	180	Average
2	*	2390.000	17.41	31.95	49.35	-4.65	54.00	150	180	Average
3		2411.125	70.98	32.03	103.01	N/A	N/A	150	180	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

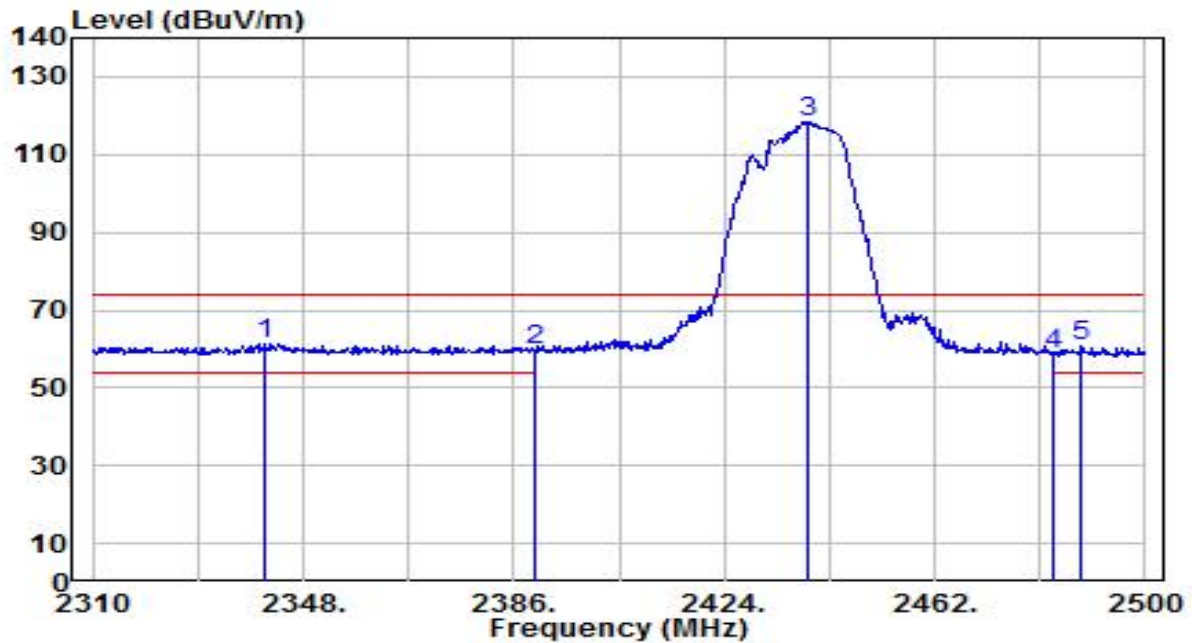


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.970	29.73	31.77	61.49	-12.51	74.00	150	300	Peak
2		2390.000	27.57	31.95	59.52	-14.48	74.00	150	300	Peak
3		2439.200	86.22	32.13	118.35	N/A	N/A	150	300	Peak
4		2483.500	26.60	32.30	58.90	-15.10	74.00	150	300	Peak
5		2488.410	28.22	32.32	60.54	-13.46	74.00	150	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

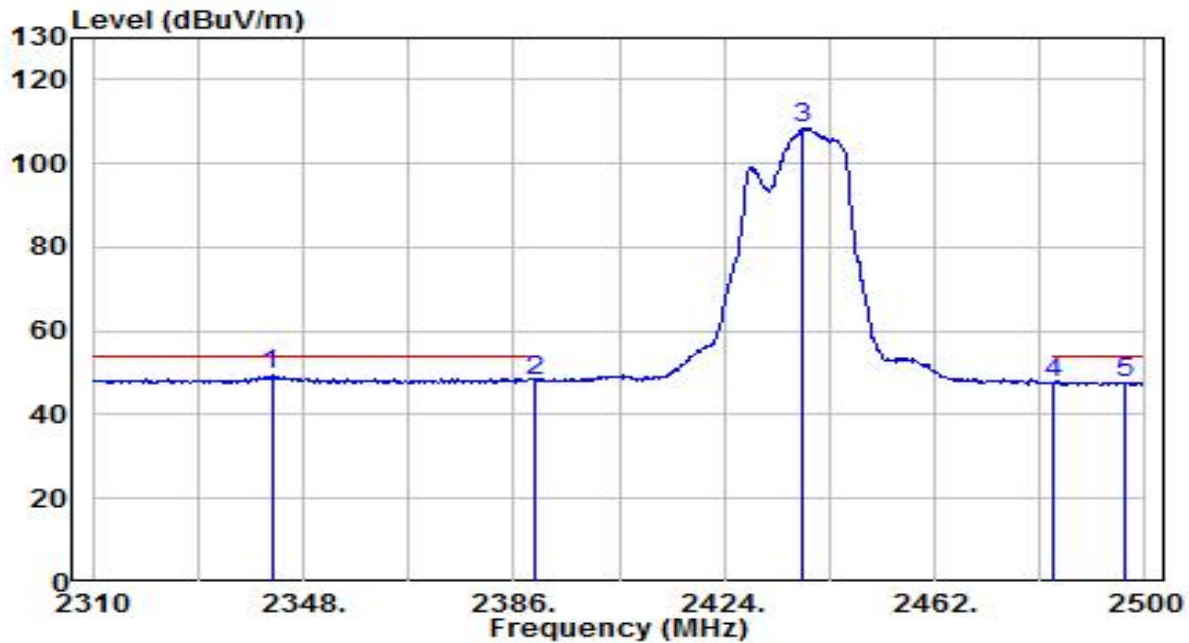


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.300	17.53	31.77	49.30	-4.70	54.00	150	300	Average
2		2390.000	16.03	31.95	47.98	-6.02	54.00	150	300	Average
3		2438.250	76.25	32.13	108.38	N/A	N/A	150	300	Average
4		2483.500	15.26	32.30	47.56	-6.44	54.00	150	300	Average
5		2496.200	15.47	32.35	47.81	-6.19	54.00	150	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

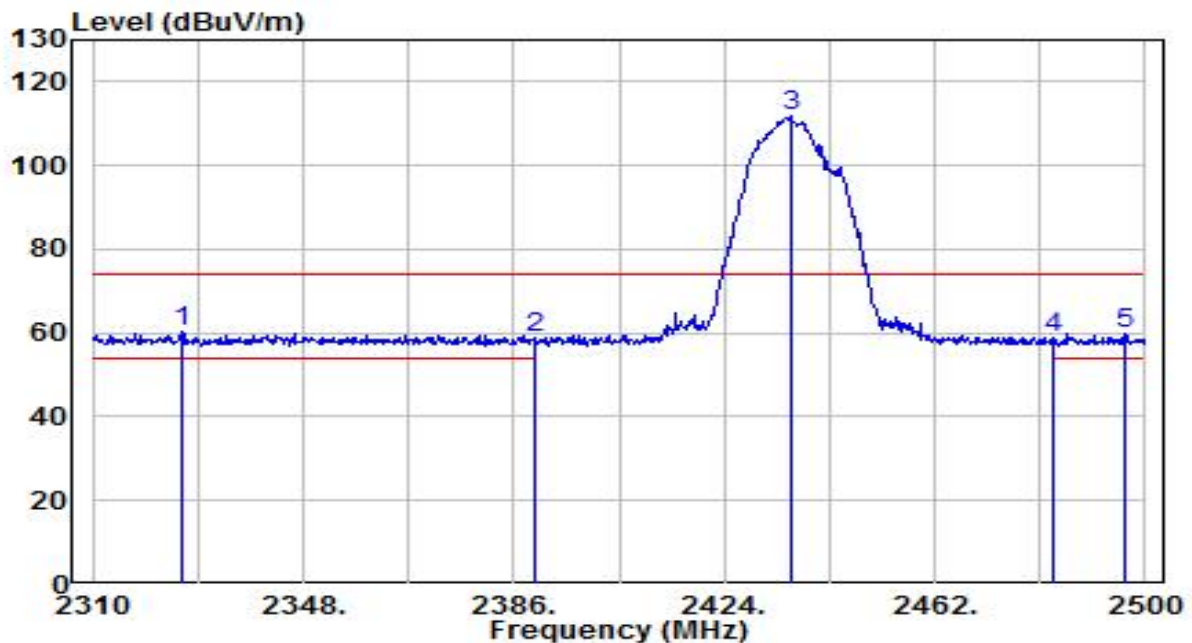


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2325.960	28.50	31.71	60.21	-13.79	74.00	130	200	Peak
2		2390.000	26.82	31.95	58.77	-15.23	74.00	130	200	Peak
3		2436.160	79.49	32.12	111.61	N/A	N/A	130	200	Peak
4		2483.500	26.68	32.30	58.98	-15.02	74.00	130	200	Peak
5		2496.200	27.41	32.35	59.76	-14.24	74.00	130	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

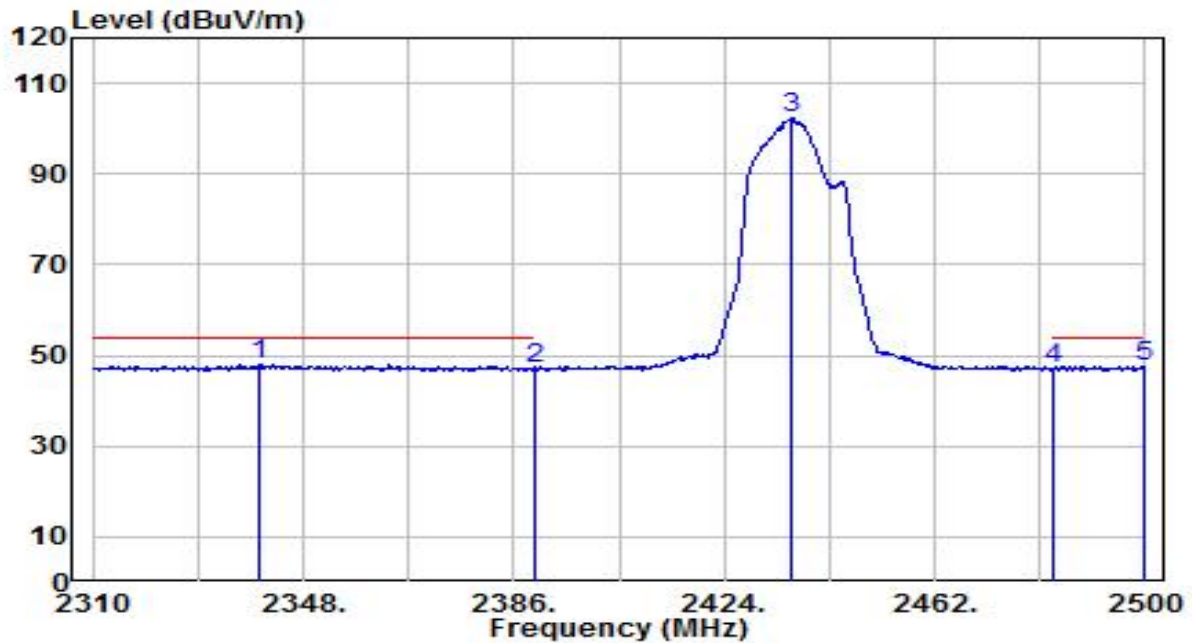


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.210	16.22	31.76	47.98	-6.02	54.00	130	200	Average
2		2390.000	15.08	31.95	47.03	-6.97	54.00	130	200	Average
3		2435.970	70.27	32.12	102.39	N/A	N/A	130	200	Average
4		2483.500	14.75	32.30	47.05	-6.95	54.00	130	200	Average
5		2499.810	15.32	32.36	47.68	-6.32	54.00	130	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

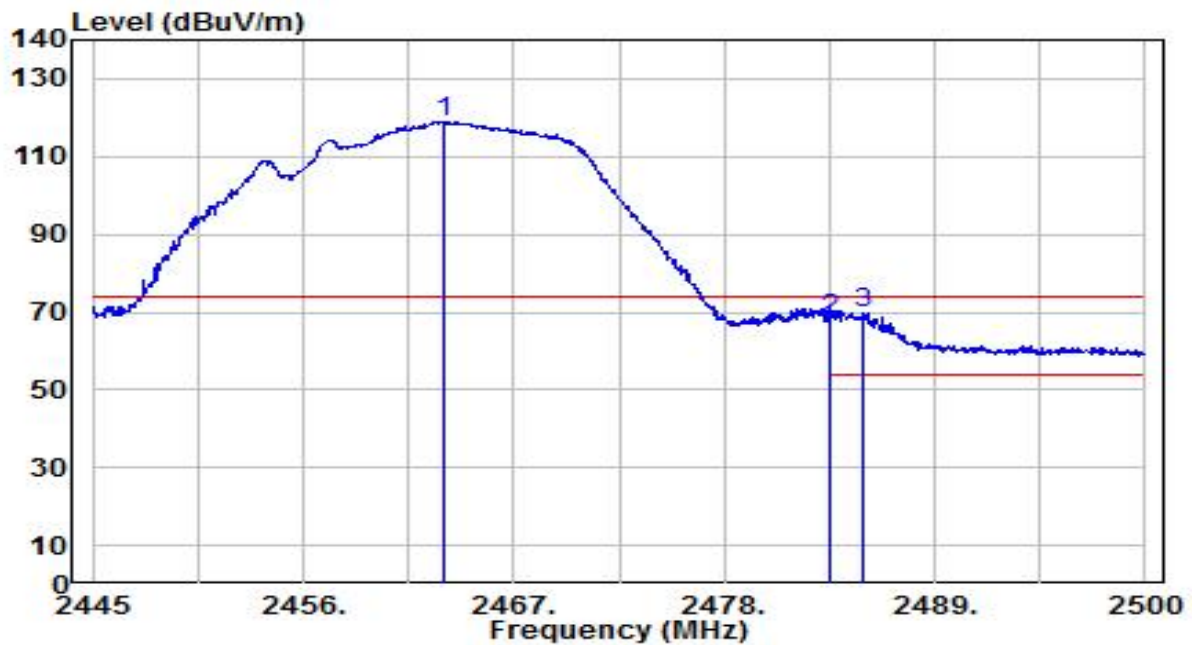


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.315	86.65	32.22	118.87	N/A	N/A	150	185	Peak
2	2483.500	36.02	32.30	68.32	-5.68	74.00	150	185	Peak
3	* 2485.205	37.57	32.30	69.88	-4.12	74.00	150	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

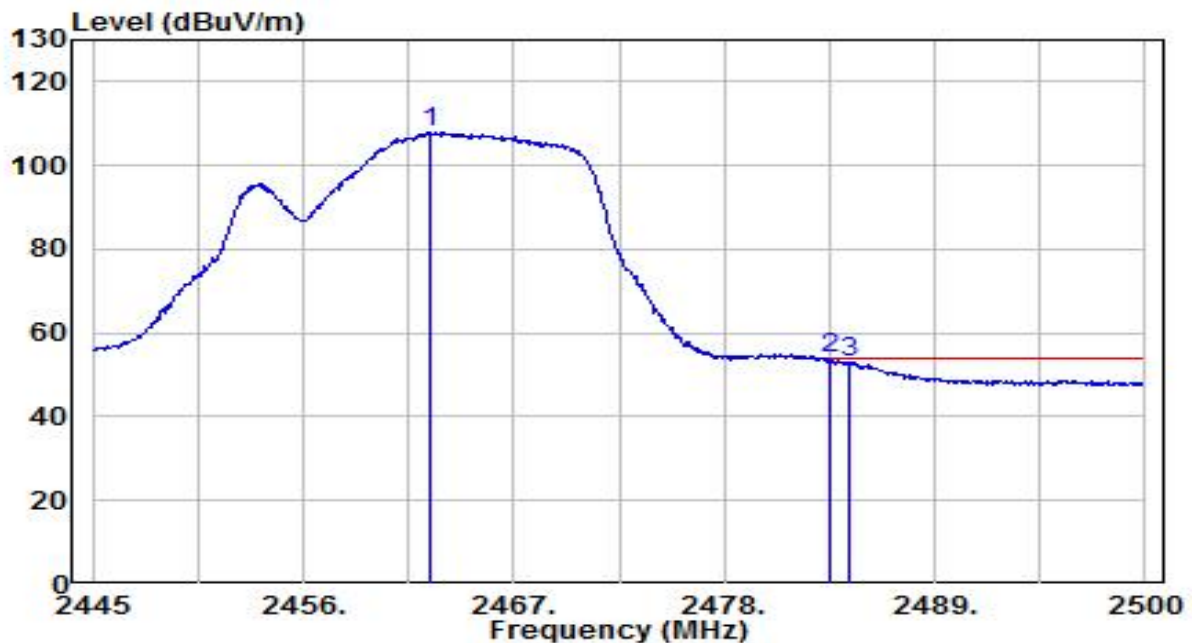


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.655	75.84	32.22	108.06	N/A	N/A	150	185	Average
2	*	2483.500	21.44	32.30	53.74	-0.26	54.00	150	185	Average
3		2484.490	20.76	32.30	53.06	-0.94	54.00	150	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

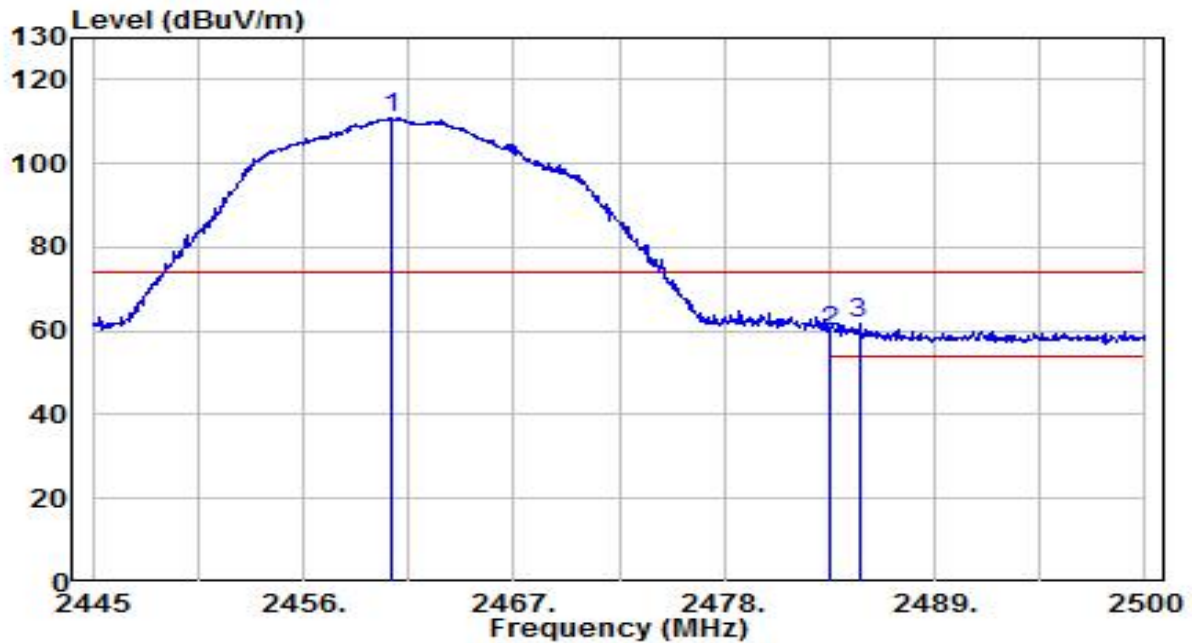


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.675	78.68	32.21	110.89	N/A	N/A	125	230	Peak
2	2483.500	27.76	32.30	60.06	-13.94	74.00	125	230	Peak
3	* 2485.040	29.35	32.30	61.66	-12.34	74.00	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

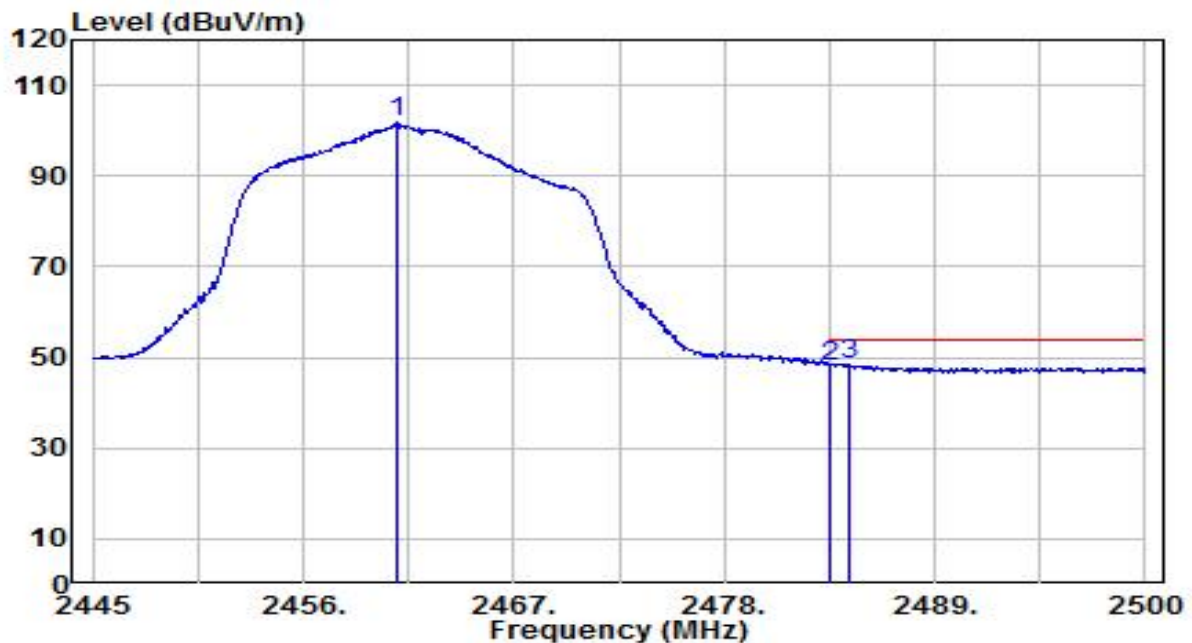


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.895	69.47	32.21	101.69	N/A	N/A	125	230	Average
2	2483.500	15.79	32.30	48.08	-5.92	54.00	125	230	Average
3	* 2484.490	16.14	32.30	48.44	-5.56	54.00	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

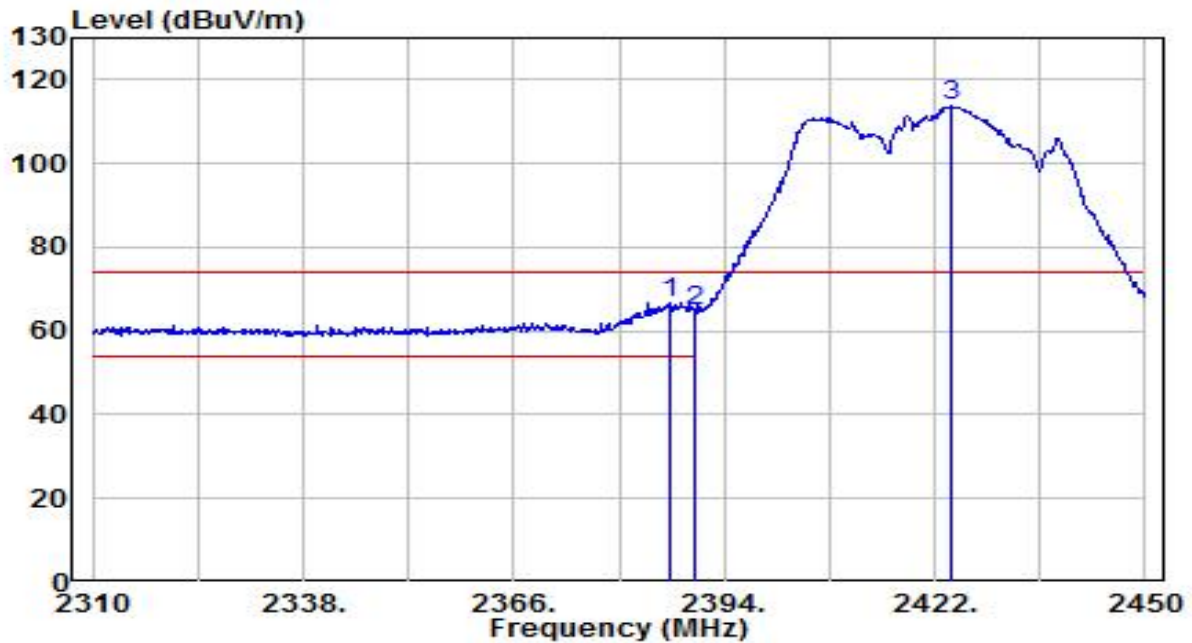


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.720	34.88	31.94	66.82	-7.18	74.00	195	200	Peak
2		2390.000	32.96	31.95	64.91	-9.09	74.00	195	200	Peak
3		2424.240	81.51	32.08	113.59	N/A	N/A	195	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

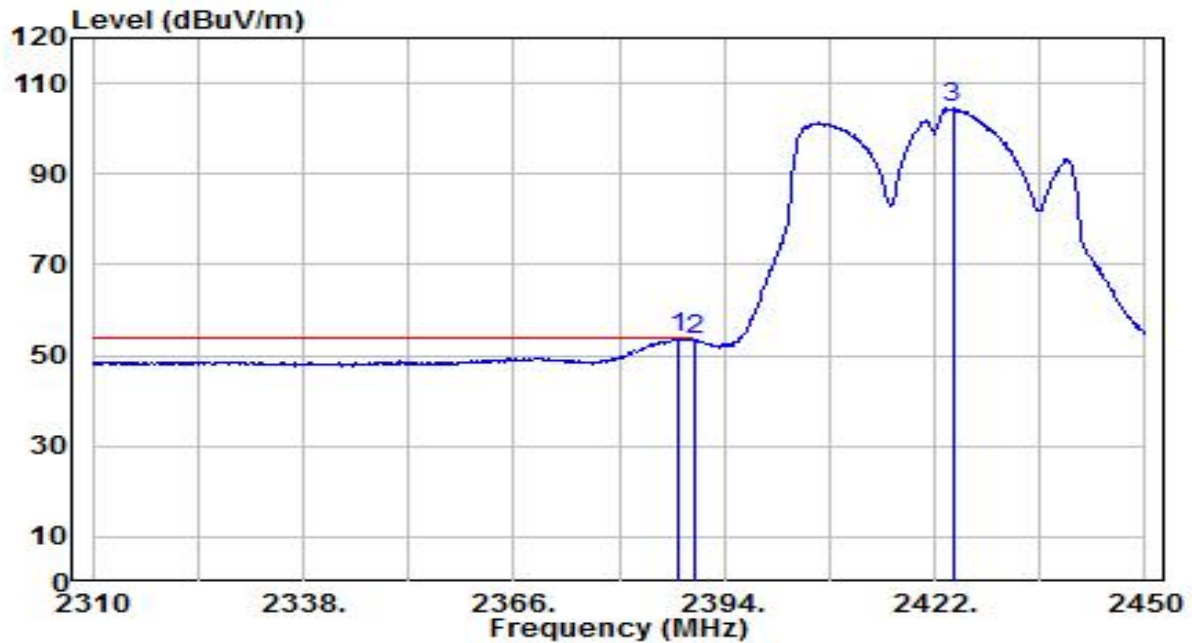


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.980	21.83	31.94	53.77	-0.23	54.00	195	200	Average
2		2390.000	21.36	31.95	53.31	-0.69	54.00	195	200	Average
3		2424.380	72.40	32.08	104.48	N/A	N/A	195	200	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

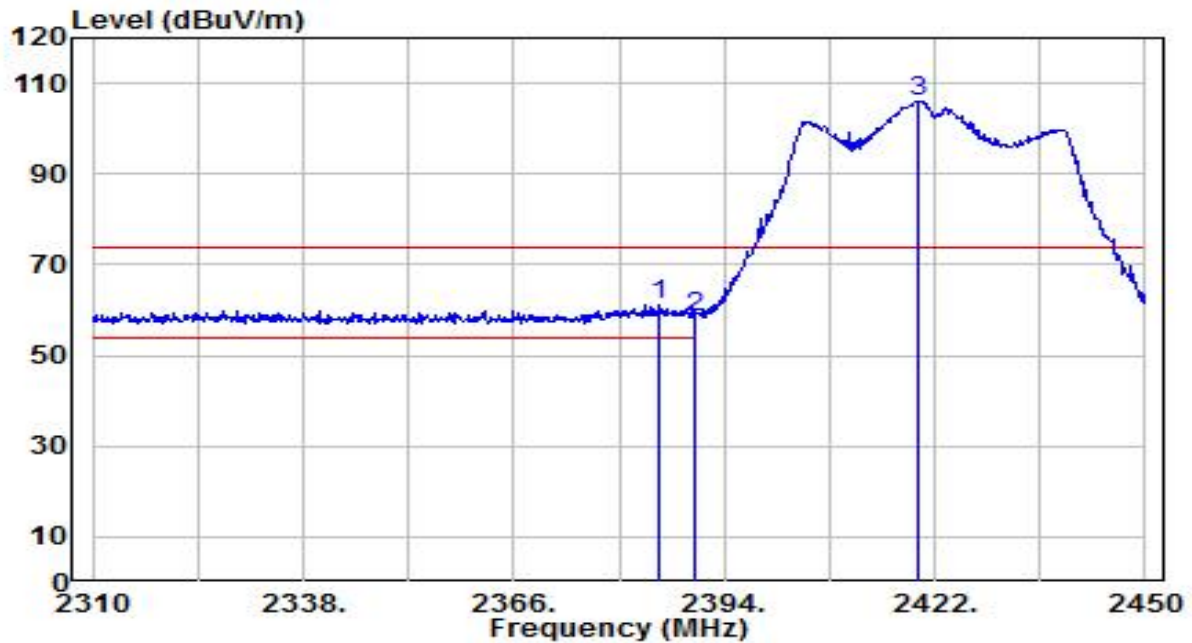


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.460	29.08	31.93	61.01	-12.99	74.00	150	180	Peak
2		2390.000	26.61	31.95	58.56	-15.44	74.00	150	180	Peak
3		2419.900	73.96	32.06	106.02	N/A	N/A	150	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

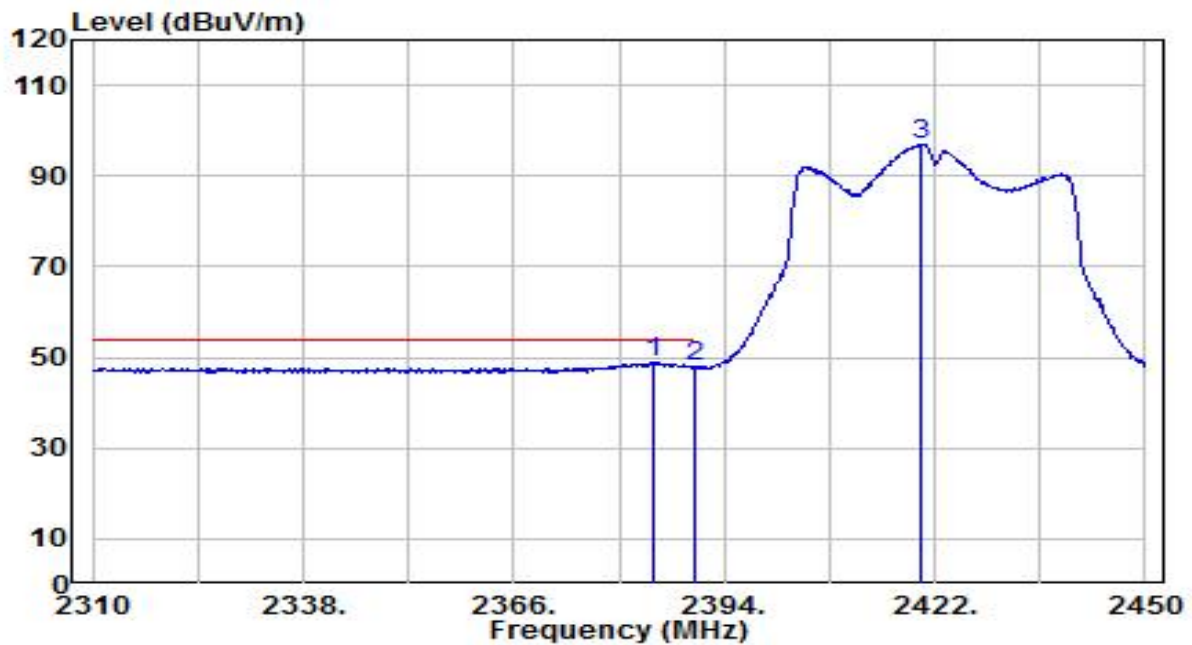


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.760	16.92	31.93	48.85	-5.15	54.00	150	180	Average
2		2390.000	15.99	31.95	47.93	-6.07	54.00	150	180	Average
3		2420.040	65.01	32.06	97.07	N/A	N/A	150	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

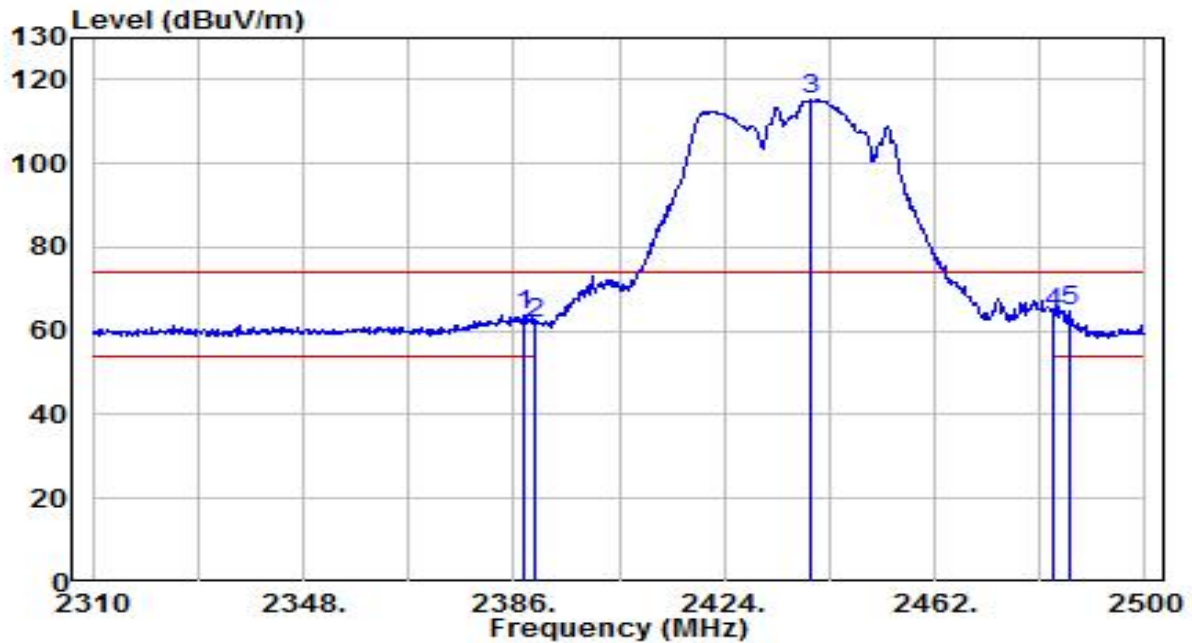


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	31.75	31.94	63.69	-10.31	74.00	150	300	Peak
2	2390.000	29.82	31.95	61.77	-12.23	74.00	150	300	Peak
3	2439.770	83.15	32.13	115.29	N/A	N/A	150	300	Peak
4	2483.500	32.17	32.30	64.47	-9.53	74.00	150	300	Peak
5	* 2486.510	32.53	32.31	64.84	-9.16	74.00	150	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

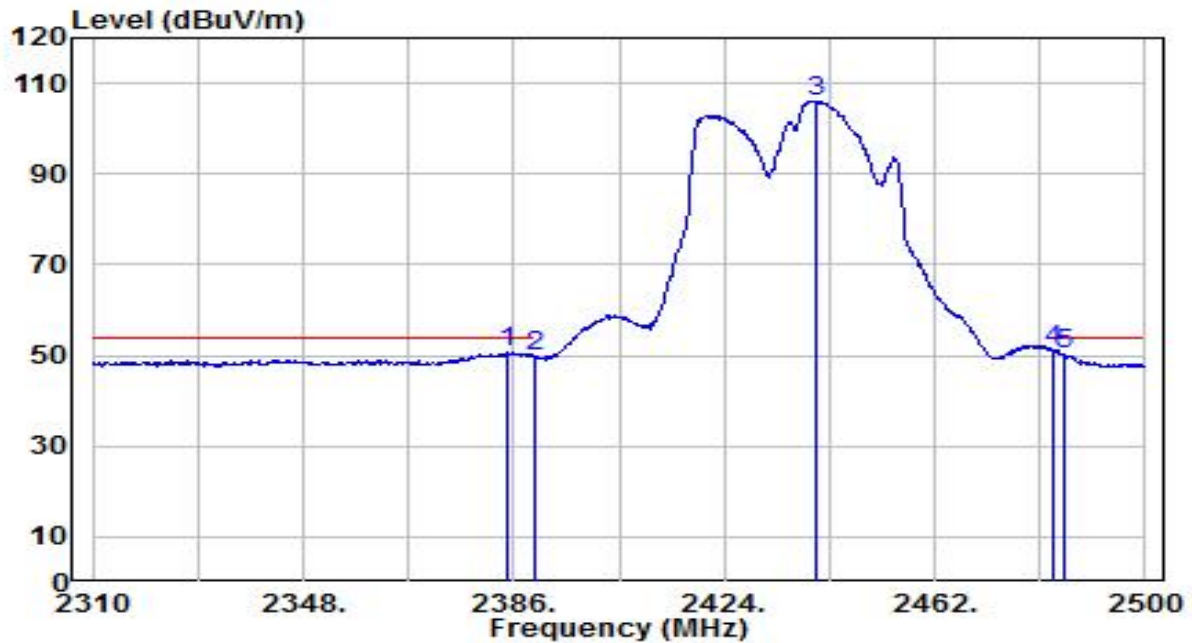


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.860	18.64	31.93	50.57	-3.43	54.00	150	300	Average
2	2390.000	17.65	31.95	49.60	-4.40	54.00	150	300	Average
3	2440.530	74.01	32.14	106.14	N/A	N/A	150	300	Average
4	* 2483.500	18.79	32.30	51.08	-2.92	54.00	150	300	Average
5	2485.370	17.89	32.31	50.19	-3.81	54.00	150	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

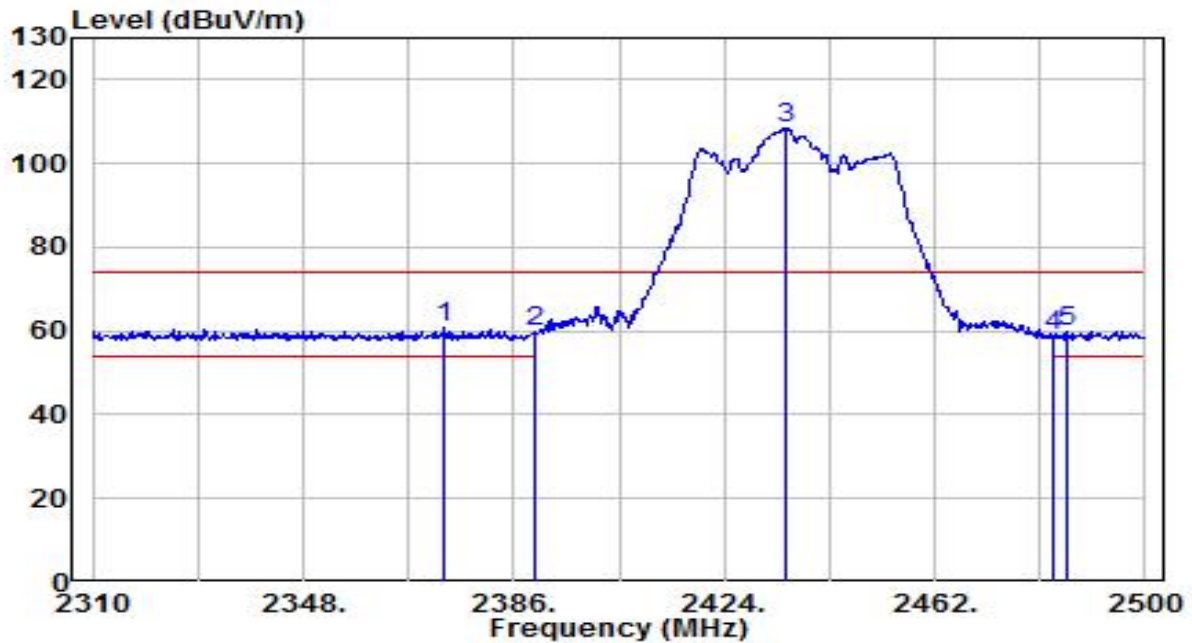


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2373.460	29.00	31.89	60.89	-13.11	74.00	130	200	Peak
2		2390.000	27.68	31.95	59.63	-14.37	74.00	130	200	Peak
3		2435.210	76.46	32.12	108.57	N/A	N/A	130	200	Peak
4		2483.500	26.35	32.30	58.65	-15.35	74.00	130	200	Peak
5		2486.130	27.65	32.31	59.96	-14.04	74.00	130	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

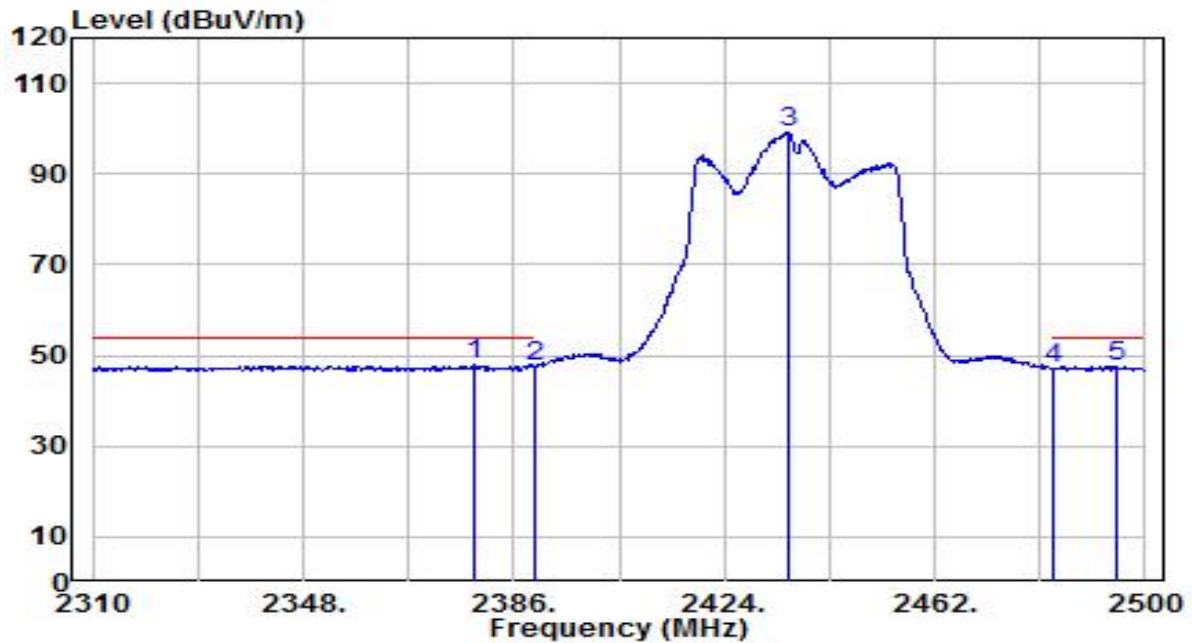


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.970	15.88	31.91	47.79	-6.21	54.00	130	200	Average
2		2390.000	15.68	31.95	47.63	-6.37	54.00	130	200	Average
3		2435.400	67.26	32.12	99.38	N/A	N/A	130	200	Average
4		2483.500	14.77	32.30	47.07	-6.93	54.00	130	200	Average
5		2494.870	15.33	32.34	47.67	-6.33	54.00	130	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

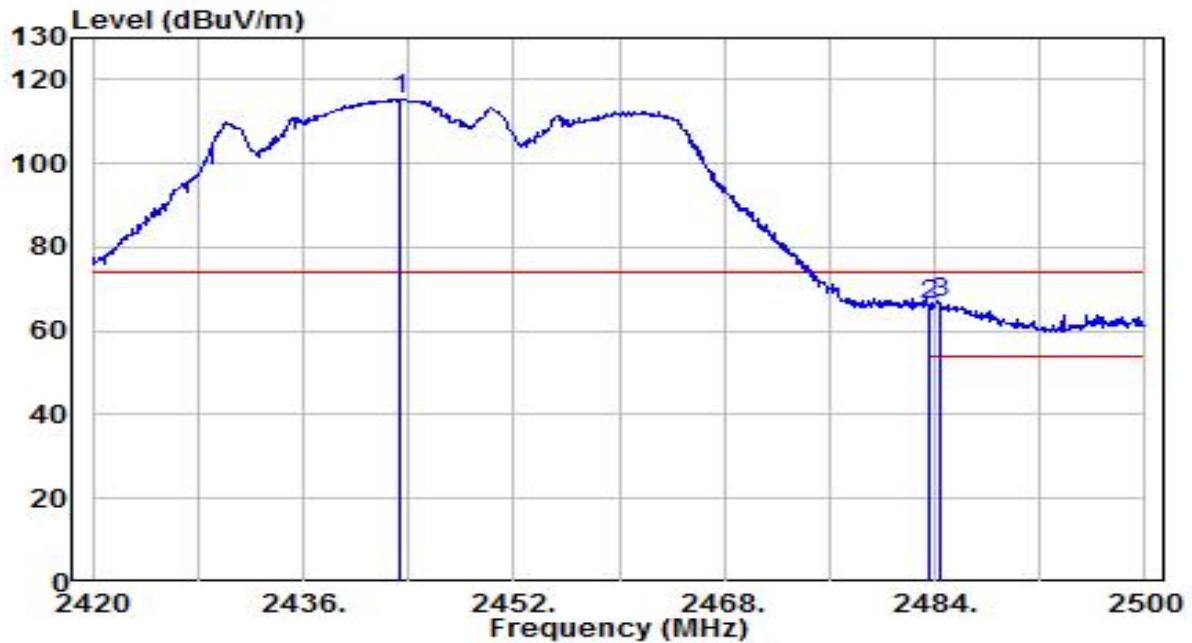


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.440	83.11	32.15	115.26	N/A	N/A	150	185	Peak
2	2483.500	34.15	32.30	66.45	-7.55	74.00	150	185	Peak
3	* 2484.480	34.65	32.30	66.95	-7.05	74.00	150	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

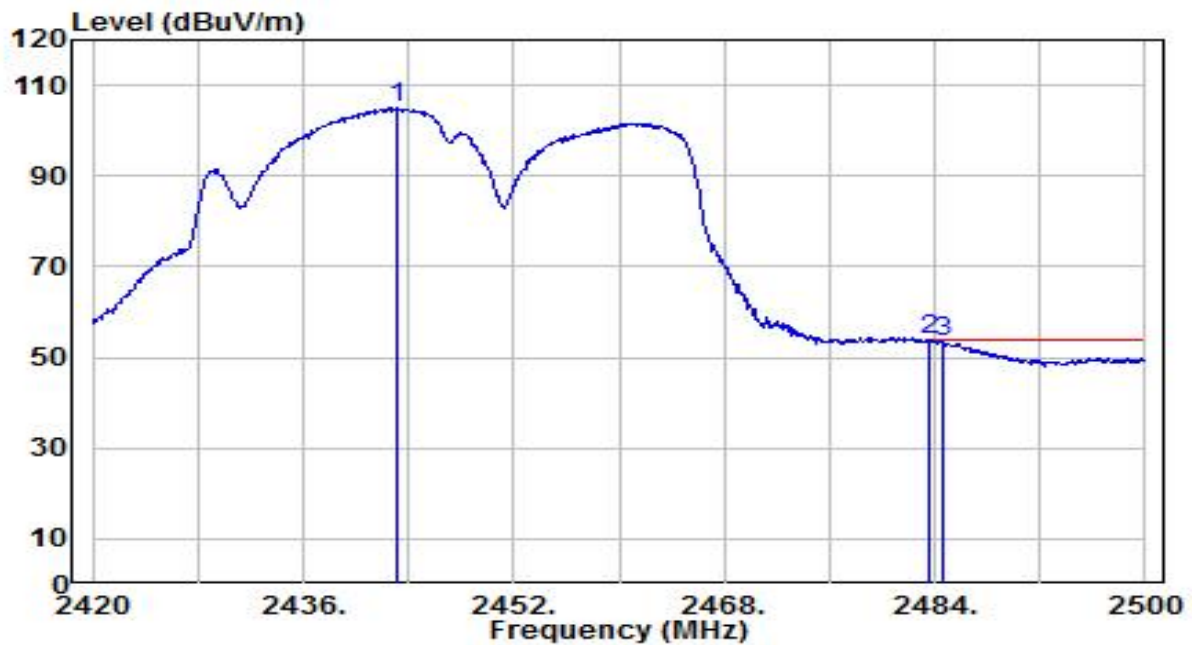


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.200	72.89	32.15	105.03	N/A	N/A	150	185	Average
2	* 2483.500	21.44	32.30	53.73	-0.27	54.00	150	185	Average
3	2484.560	21.13	32.30	53.43	-0.57	54.00	150	185	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

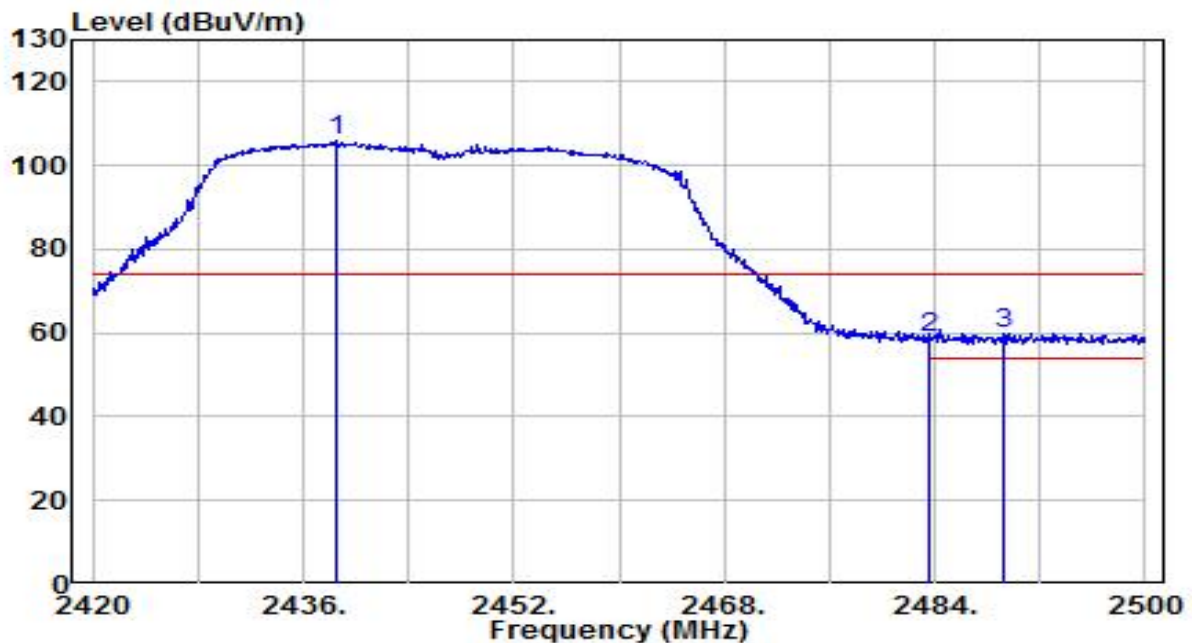


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2438.480	73.64	32.13	105.77	N/A	N/A	125	230	Peak
2	2483.500	26.60	32.30	58.90	-15.10	74.00	125	230	Peak
3	* 2489.200	27.71	32.32	60.03	-13.97	74.00	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

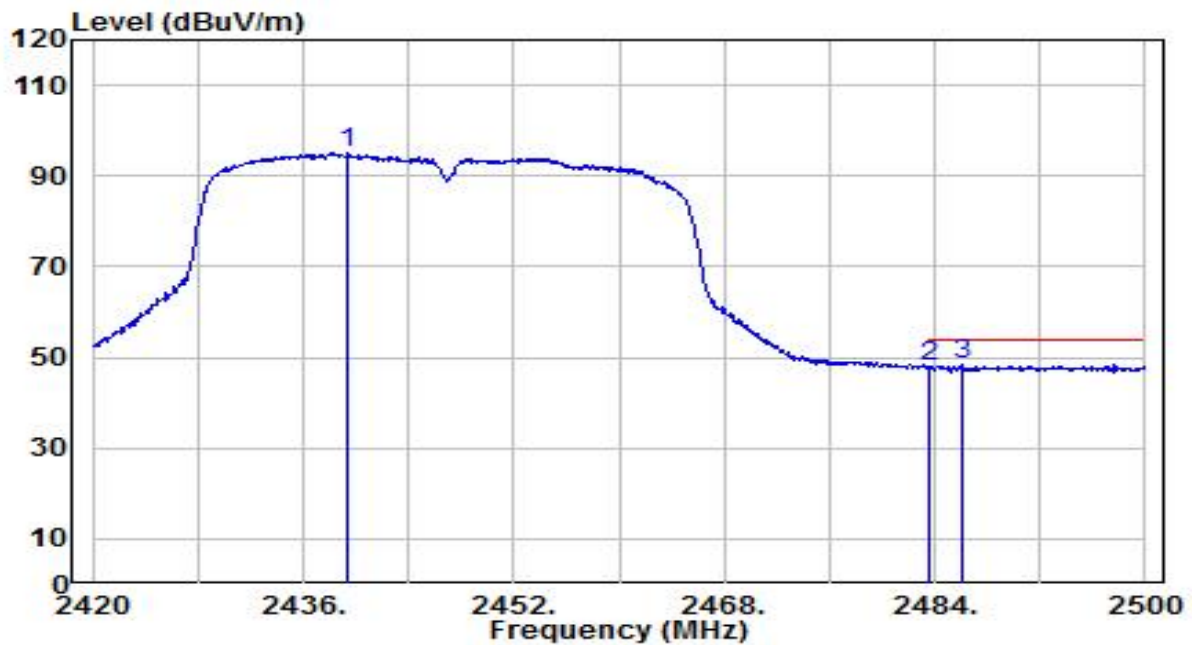


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2439.360	62.83	32.13	94.96	N/A	N/A	125	230	Average
2	2483.500	15.75	32.30	48.05	-5.95	54.00	125	230	Average
3	* 2486.160	16.03	32.31	48.34	-5.66	54.00	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

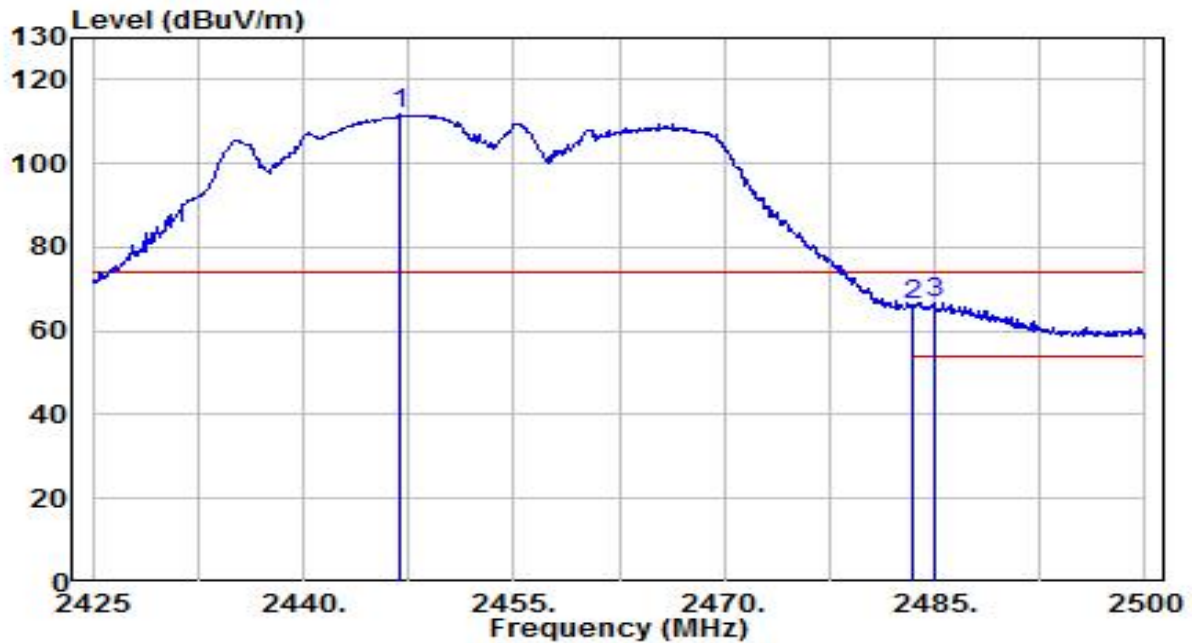


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2446.975	79.46	32.16	111.62	N/A	N/A	150	185	Peak
2	2483.500	33.95	32.30	66.25	-7.75	74.00	150	185	Peak
3	* 2484.925	34.49	32.30	66.79	-7.21	74.00	150	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

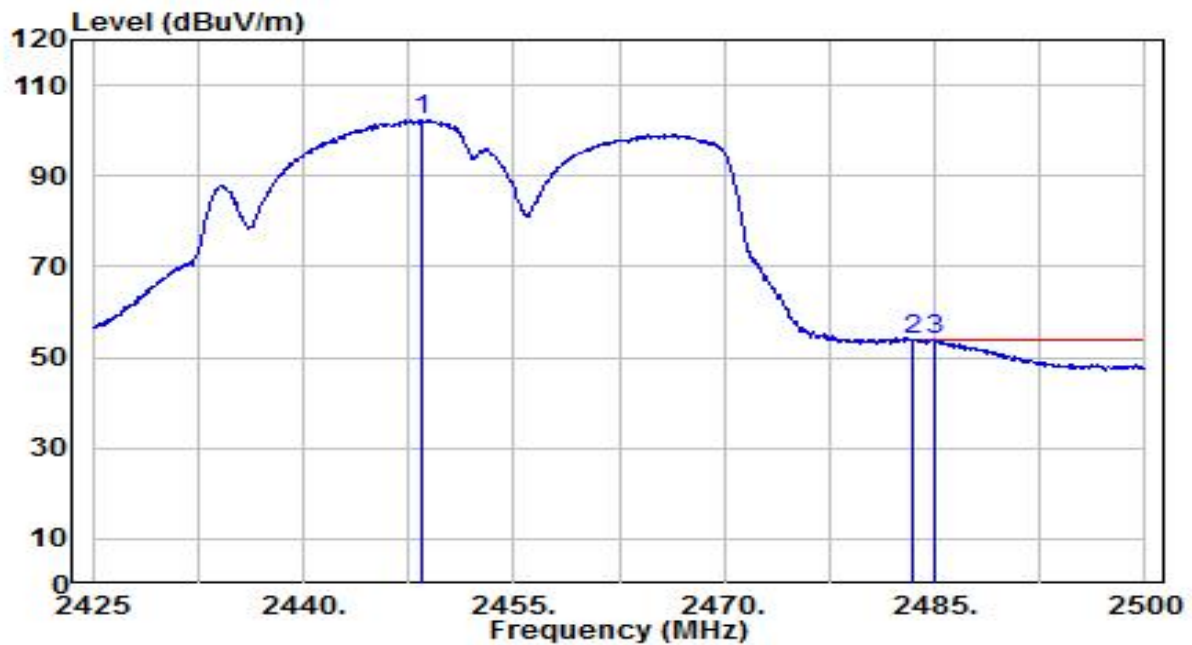


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.550	70.28	32.17	102.45	N/A	N/A	150	185	Average
2	2483.500	21.60	32.30	53.90	-0.10	54.00	150	185	Average
3	* 2485.000	21.60	32.30	53.90	-0.10	54.00	150	185	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

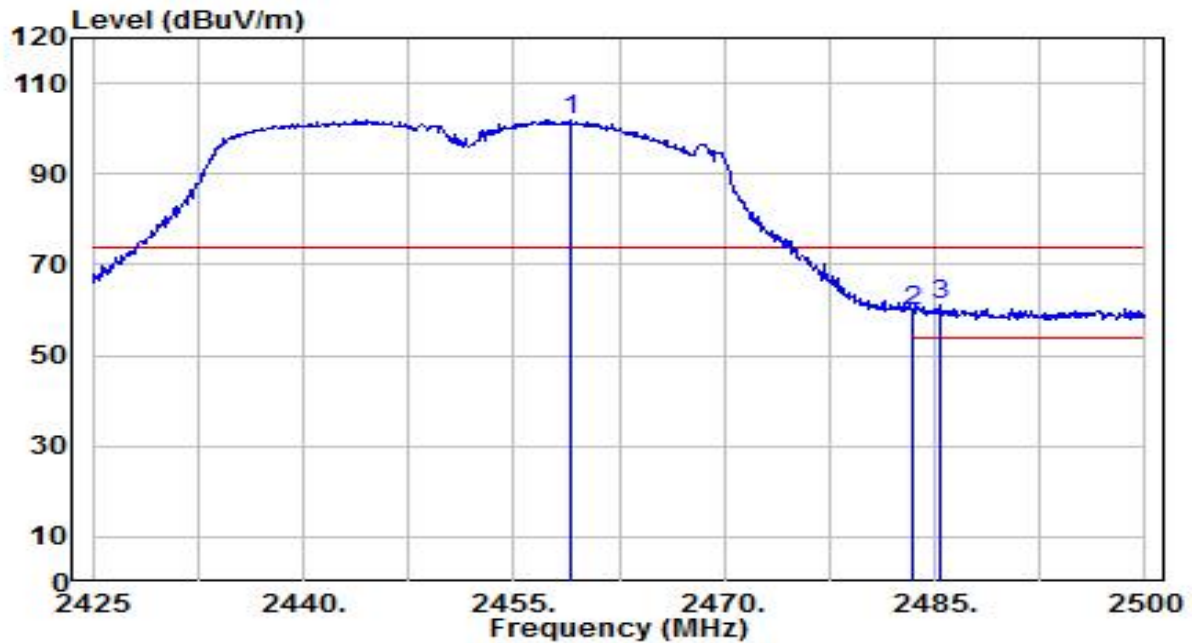


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.975	69.80	32.21	102.01	N/A	N/A	125	230	Peak
2	2483.500	27.56	32.30	59.85	-14.15	74.00	125	230	Peak
3	* 2485.300	28.66	32.31	60.96	-13.04	74.00	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

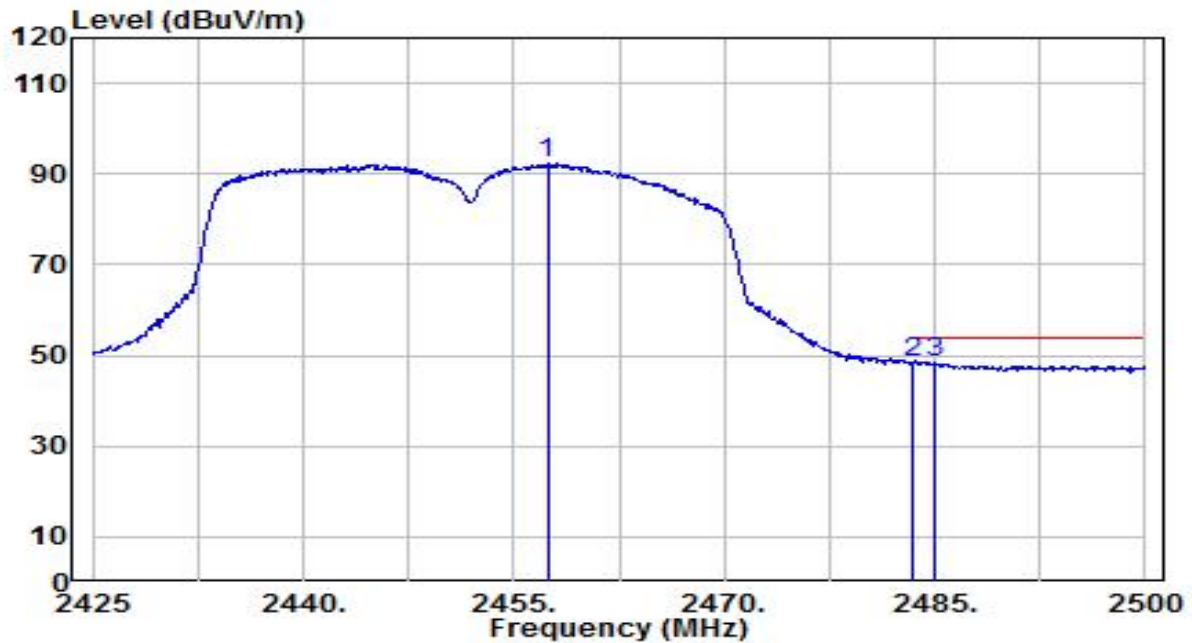


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.400	60.11	32.20	92.31	N/A	N/A	125	230	Average
2	*	2483.500	16.26	32.30	48.55	-5.45	54.00	125	230	Average
3		2485.000	16.01	32.30	48.31	-5.69	54.00	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

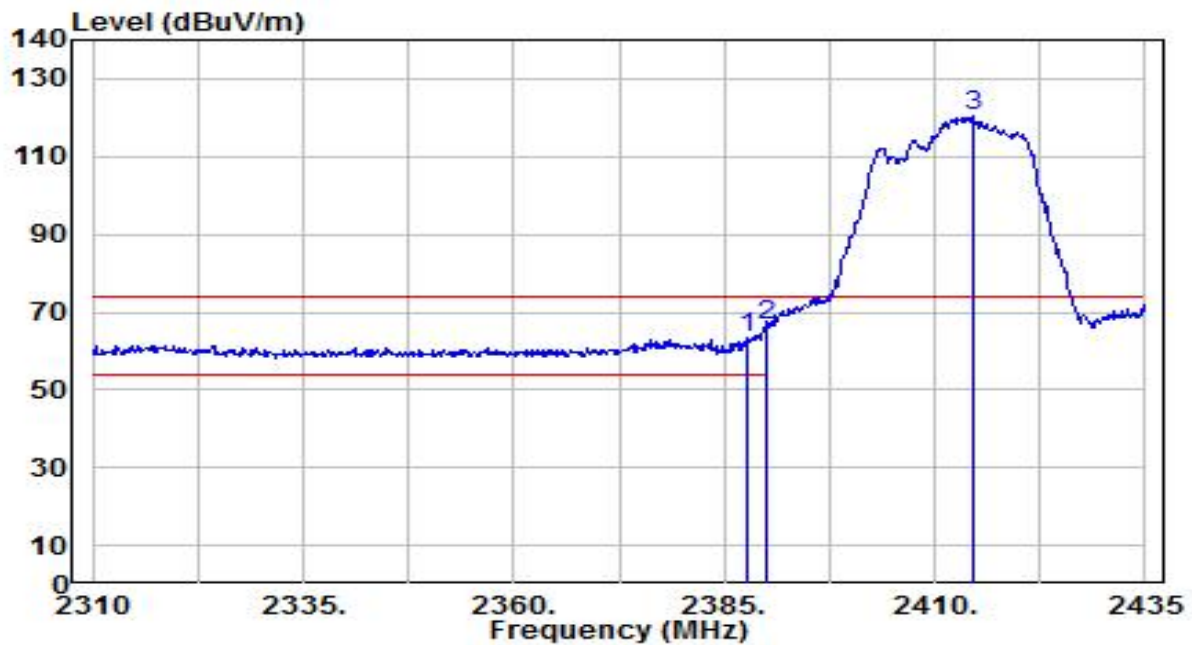


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.625	31.36	31.94	63.30	-10.70	74.00	200	190	Peak
2	*	2390.000	34.48	31.95	66.43	-7.57	74.00	200	190	Peak
3		2414.500	88.28	32.04	120.32	N/A	N/A	200	190	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

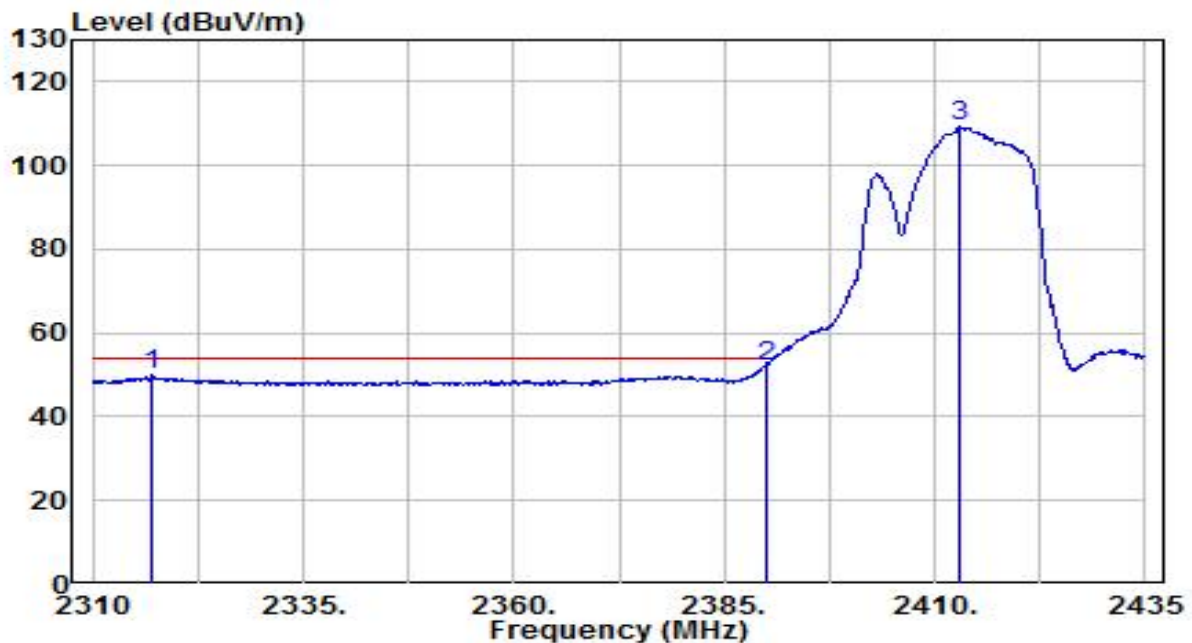


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2317.000	18.17	31.68	49.84	-4.16	54.00	200	190	Average
2	*	2390.000	20.17	31.95	52.12	-1.88	54.00	200	190	Average
3		2413.000	77.15	32.03	109.18	N/A	N/A	200	190	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

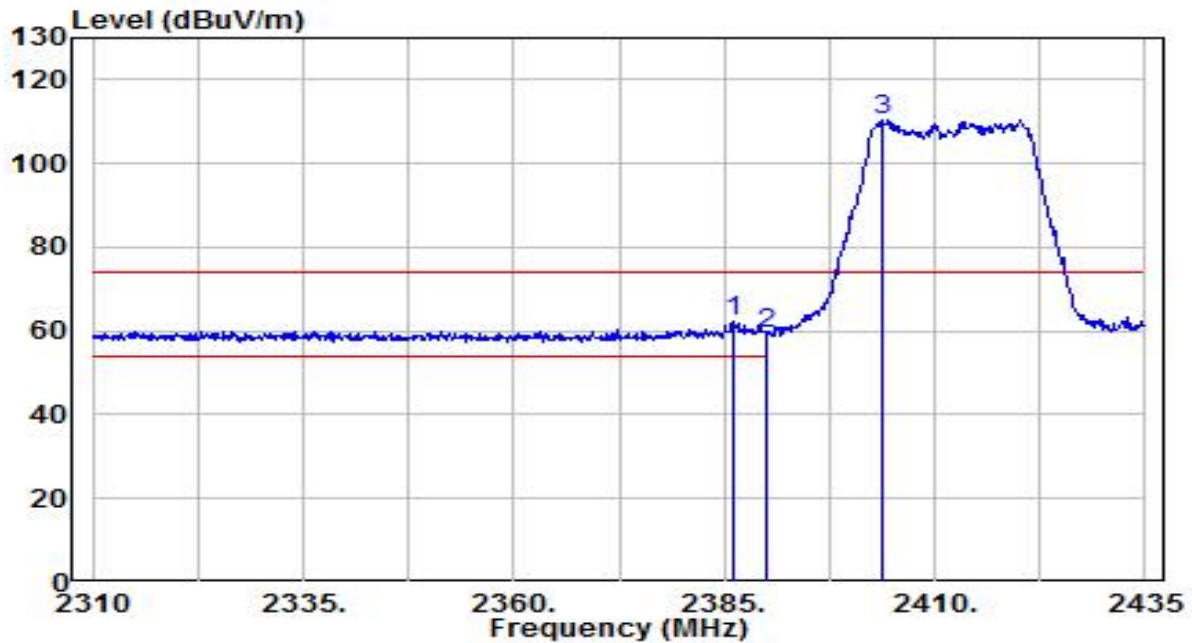


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.125	30.28	31.93	62.21	-11.79	74.00	145	200	Peak
2		2390.000	27.51	31.95	59.46	-14.54	74.00	145	200	Peak
3		2403.625	78.49	32.00	110.49	N/A	N/A	145	200	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

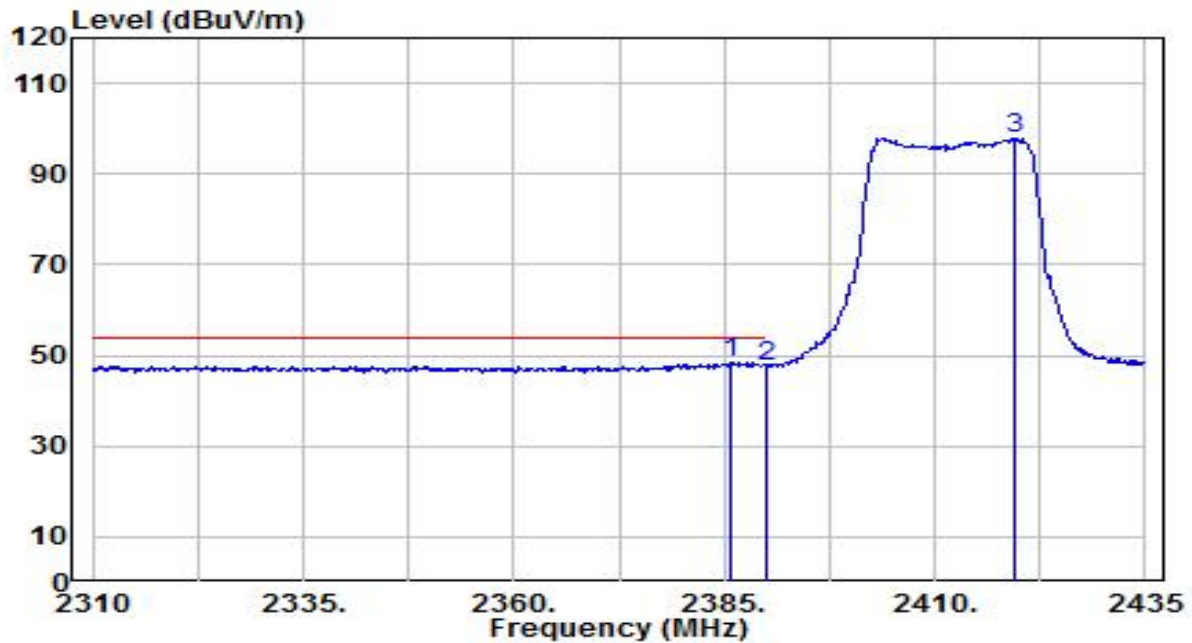


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.875	16.59	31.93	48.53	-5.47	54.00	145	200	Average
2		2390.000	15.55	31.95	47.50	-6.50	54.00	145	200	Average
3		2419.625	65.86	32.06	97.92	N/A	N/A	145	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

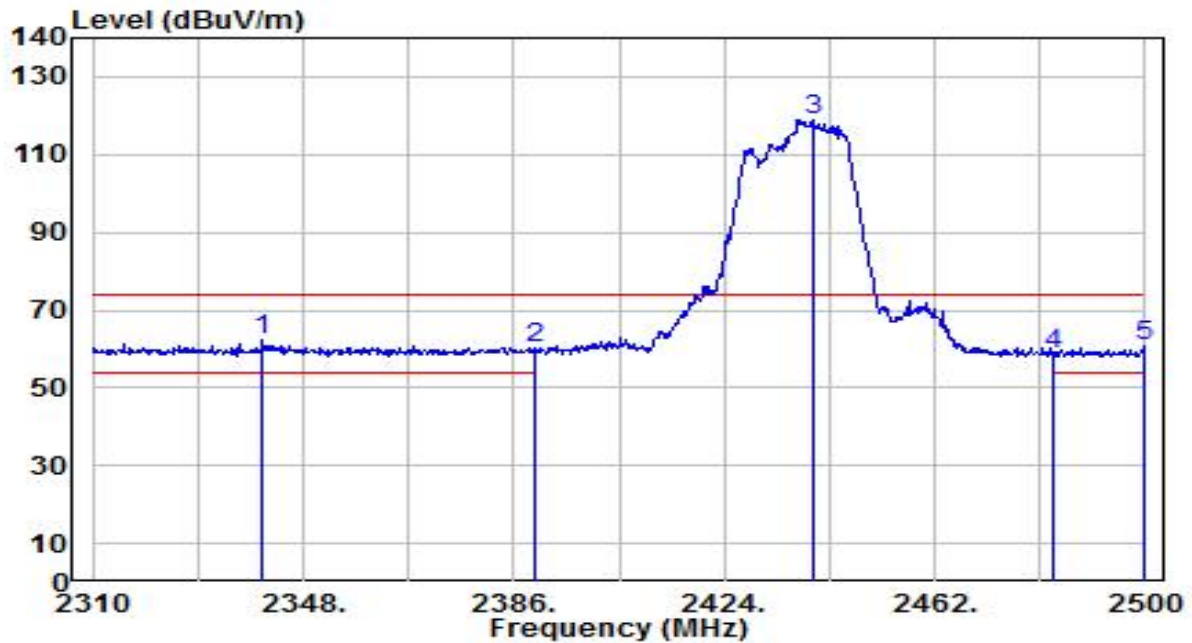


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.780	30.74	31.76	62.50	-11.50	74.00	145	290	Peak
2		2390.000	28.02	31.95	59.97	-14.03	74.00	145	290	Peak
3		2439.960	86.88	32.14	119.02	N/A	N/A	145	290	Peak
4		2483.500	26.61	32.30	58.90	-15.10	74.00	145	290	Peak
5		2499.810	28.17	32.36	60.53	-13.47	74.00	145	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

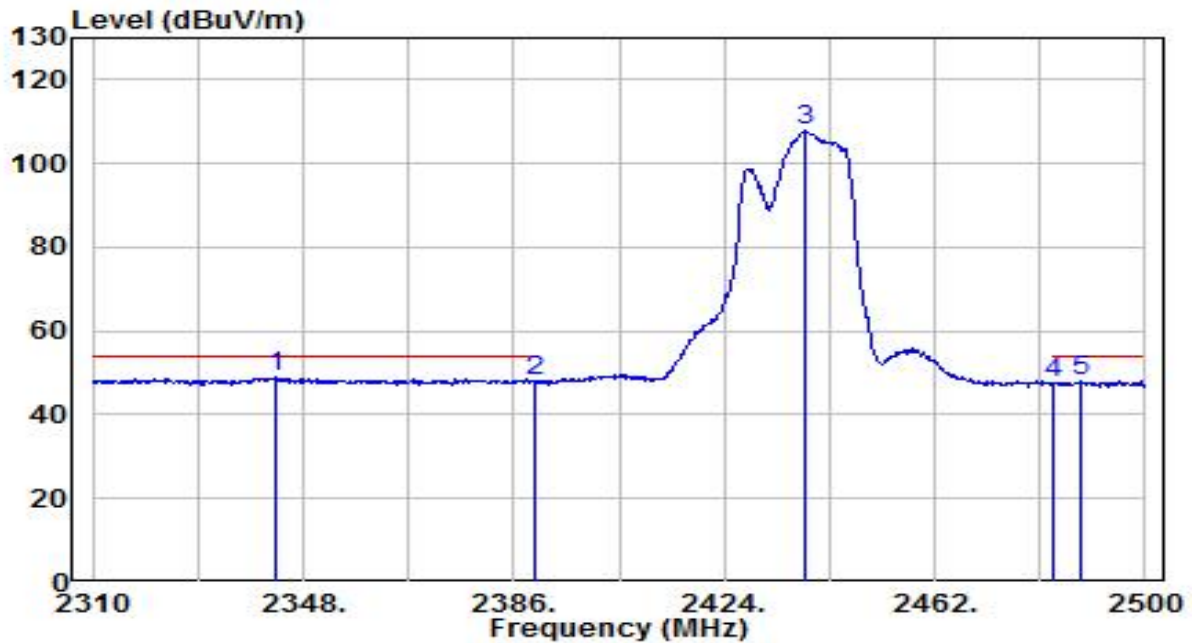


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2343.250	17.07	31.77	48.85	-5.15	54.00	145	290	Average
2		2390.000	16.04	31.95	47.99	-6.01	54.00	145	290	Average
3		2438.630	75.60	32.13	107.73	N/A	N/A	145	290	Average
4		2483.500	15.39	32.30	47.69	-6.31	54.00	145	290	Average
5		2488.410	15.61	32.32	47.93	-6.07	54.00	145	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

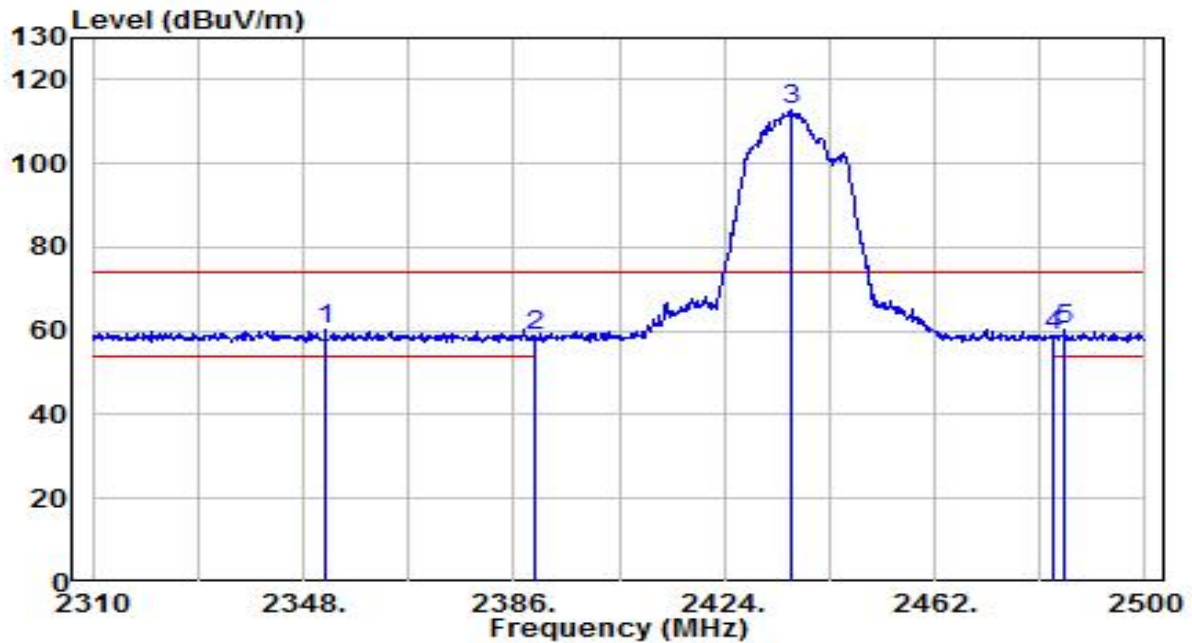


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2351.990	28.42	31.81	60.23	-13.77	74.00	150	225	Peak
2		2390.000	26.77	31.95	58.72	-15.28	74.00	150	225	Peak
3		2435.970	80.49	32.12	112.61	N/A	N/A	150	225	Peak
4		2483.500	26.53	32.30	58.83	-15.17	74.00	150	225	Peak
5		2485.560	27.80	32.31	60.11	-13.89	74.00	150	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

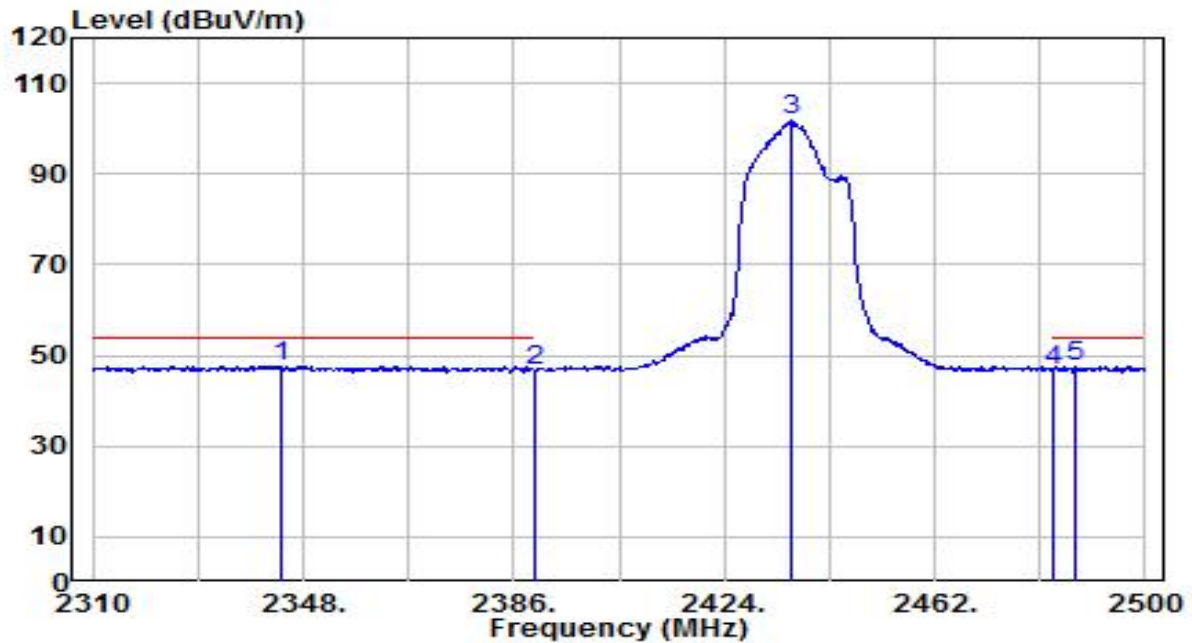


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2344.200	15.95	31.78	47.73	-6.27	54.00	150	225	Average
2		2390.000	14.88	31.95	46.83	-7.17	54.00	150	225	Average
3		2436.160	69.59	32.12	101.71	N/A	N/A	150	225	Average
4		2483.500	14.52	32.30	46.82	-7.18	54.00	150	225	Average
5		2487.270	15.18	32.31	47.50	-6.50	54.00	150	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

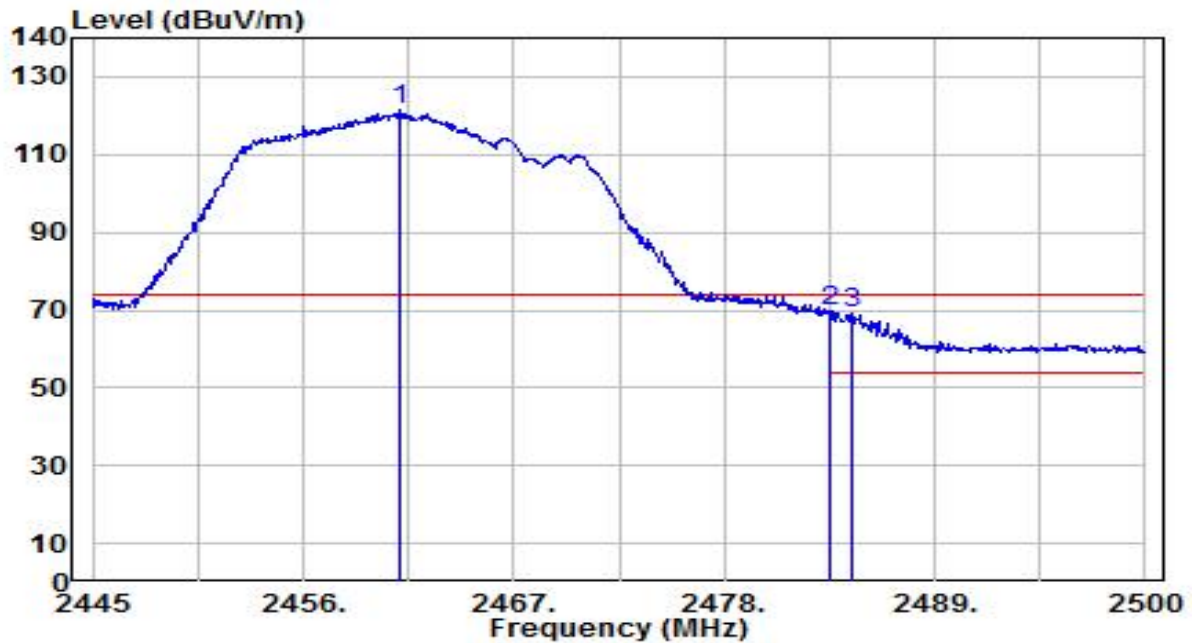


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.005	89.30	32.21	121.52	N/A	N/A	165	150	Peak
2	* 2483.500	37.32	32.30	69.62	-4.38	74.00	165	150	Peak
3	2484.655	36.99	32.30	69.29	-4.71	74.00	165	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

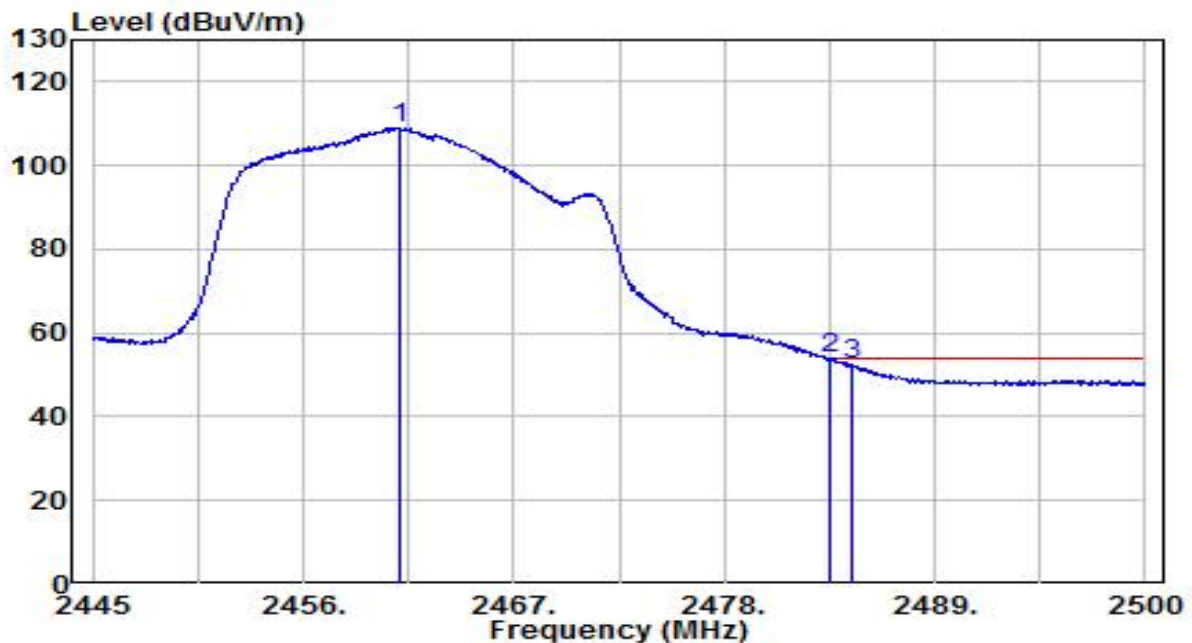


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.005	76.84	32.21	109.05	N/A	N/A	165	150	Average
2	*	2483.500	21.47	32.30	53.77	-0.23	54.00	165	150	Average
3		2484.655	20.14	32.30	52.44	-1.56	54.00	165	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

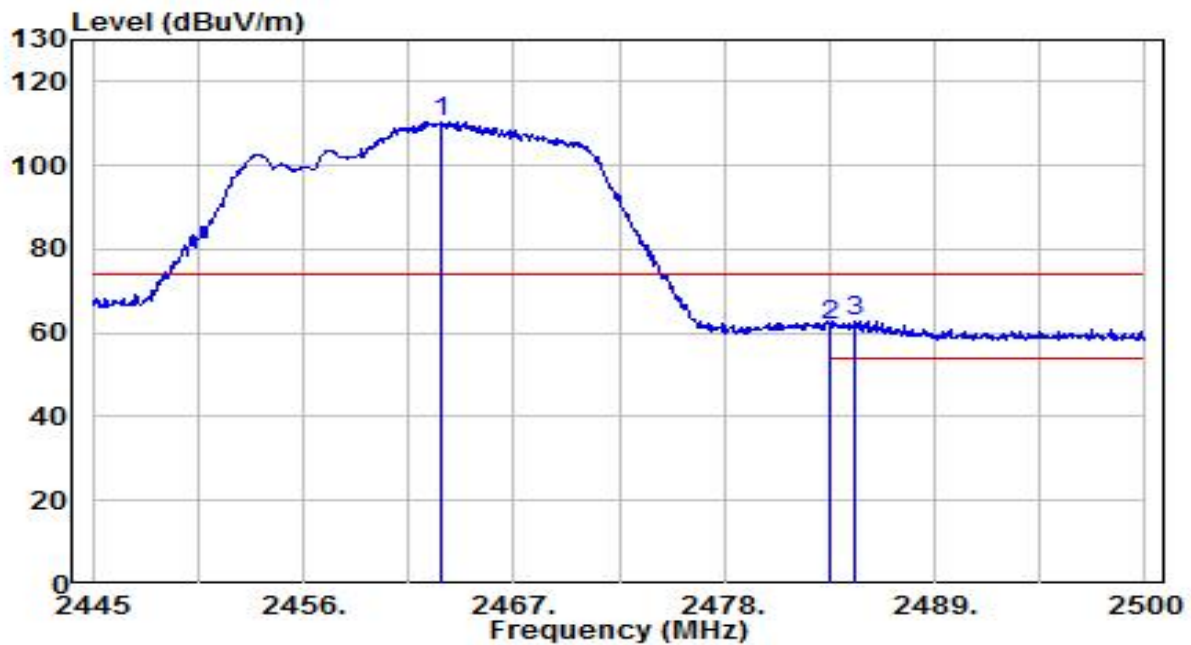


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.150	78.30	32.22	110.52	N/A	N/A	150	355	Peak
2	2483.500	29.53	32.30	61.83	-12.17	74.00	150	355	Peak
3	* 2484.875	30.53	32.30	62.83	-11.17	74.00	150	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

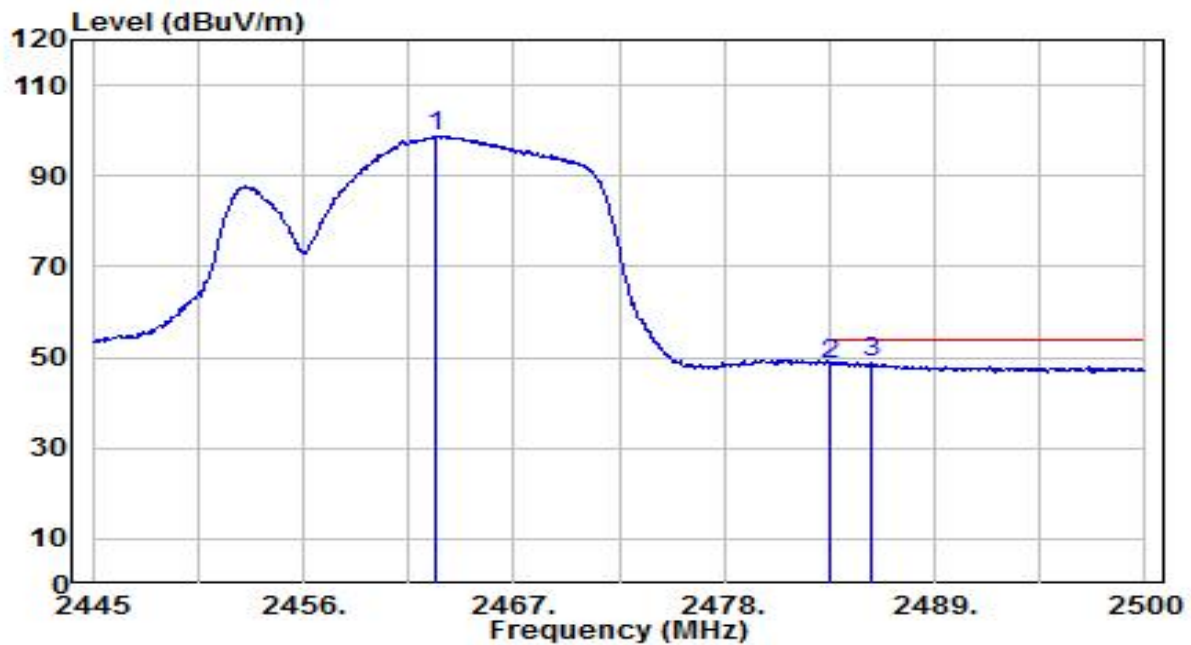


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.930	66.70	32.22	98.92	N/A	N/A	150	355	Average
2	2483.500	16.04	32.30	48.34	-5.66	54.00	150	355	Average
3	* 2485.645	16.54	32.31	48.85	-5.15	54.00	150	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

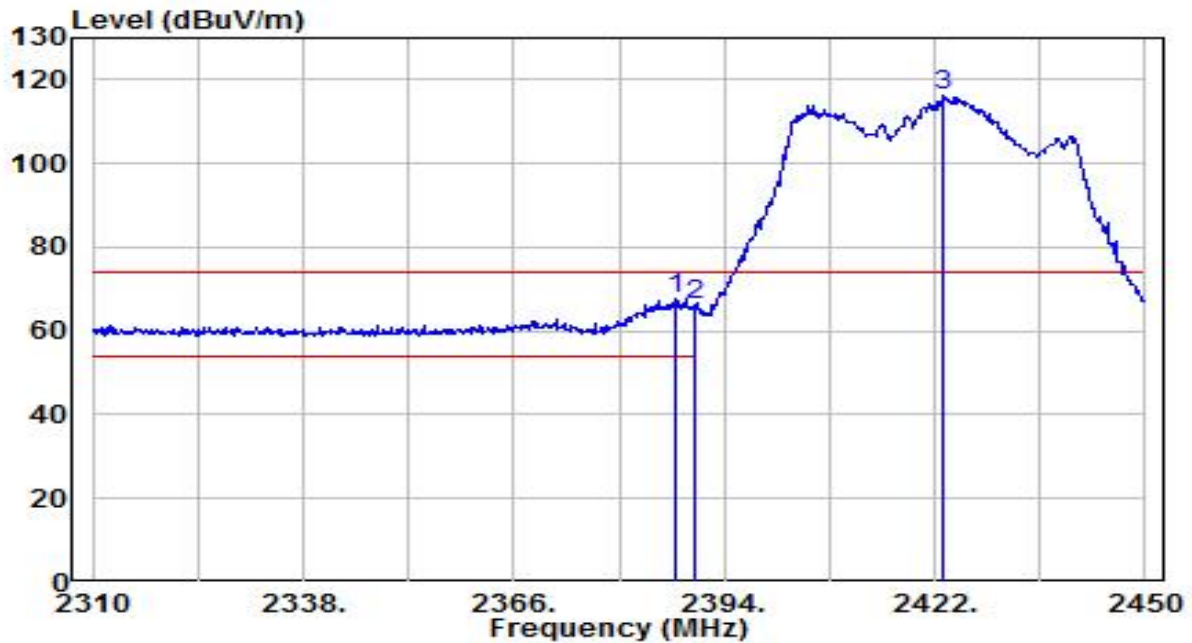


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.420	35.54	31.94	67.48	-6.52	74.00	200	190	Peak
2		2390.000	34.11	31.95	66.06	-7.94	74.00	200	190	Peak
3		2423.120	84.05	32.07	116.12	N/A	N/A	200	190	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

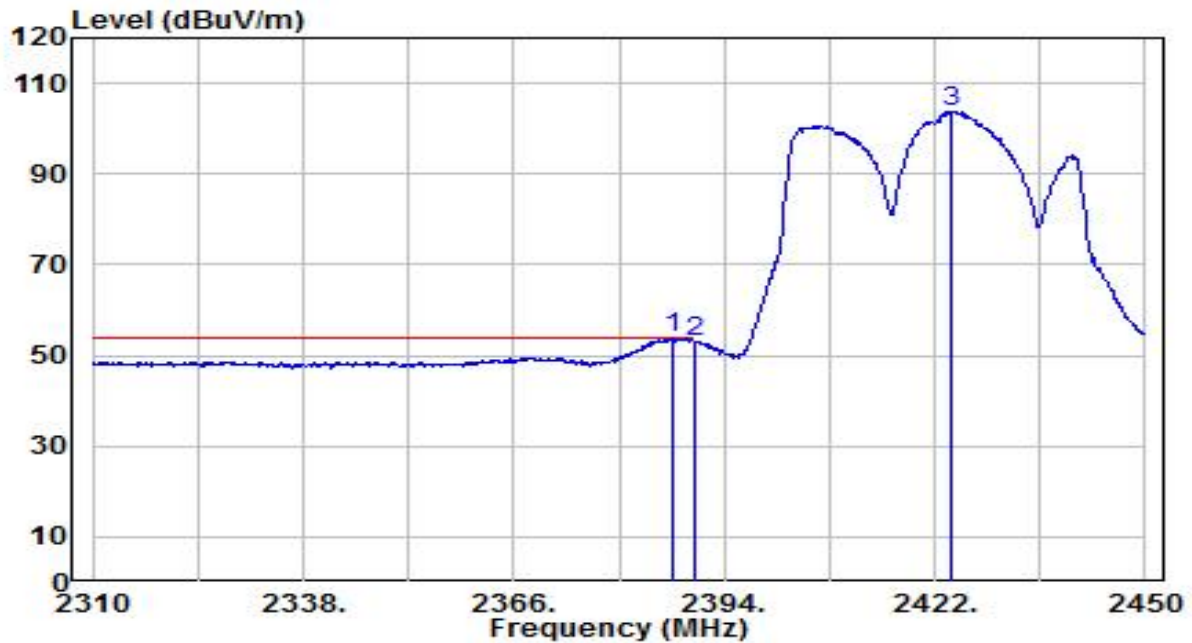


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.280	21.77	31.94	53.70	-0.30	54.00	200	190	Average
2		2390.000	21.07	31.95	53.02	-0.98	54.00	200	190	Average
3		2424.240	71.83	32.08	103.91	N/A	N/A	200	190	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

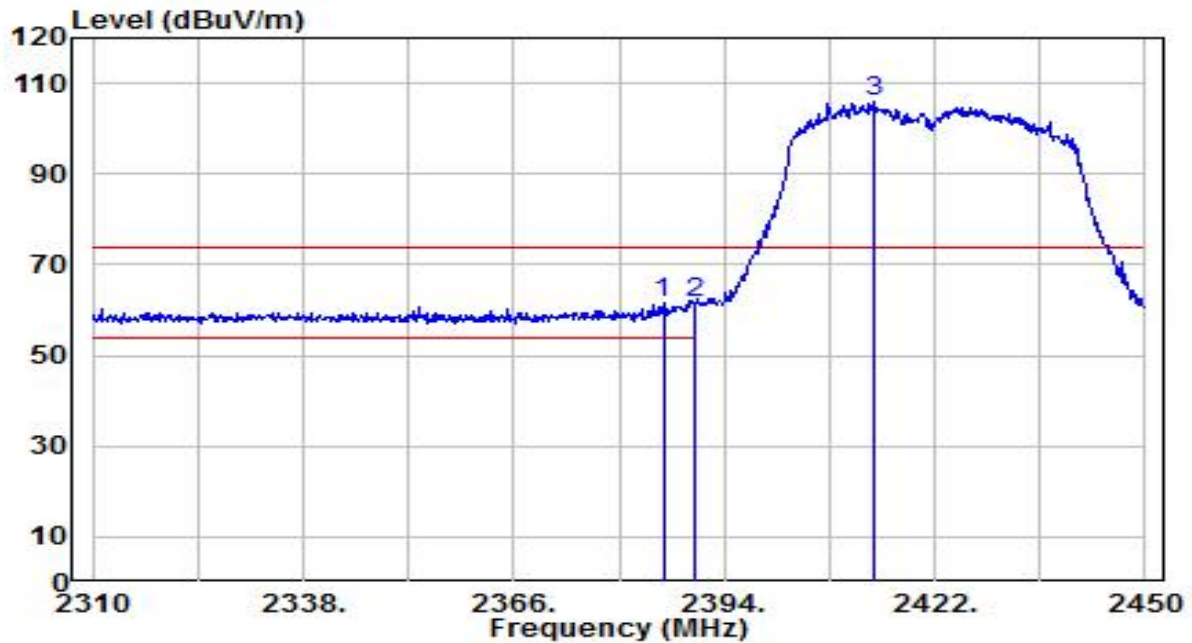


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.880	29.71	31.93	61.64	-12.36	74.00	145	200	Peak
2	*	2390.000	29.80	31.95	61.75	-12.25	74.00	145	200	Peak
3		2413.880	74.14	32.04	106.18	N/A	N/A	145	200	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

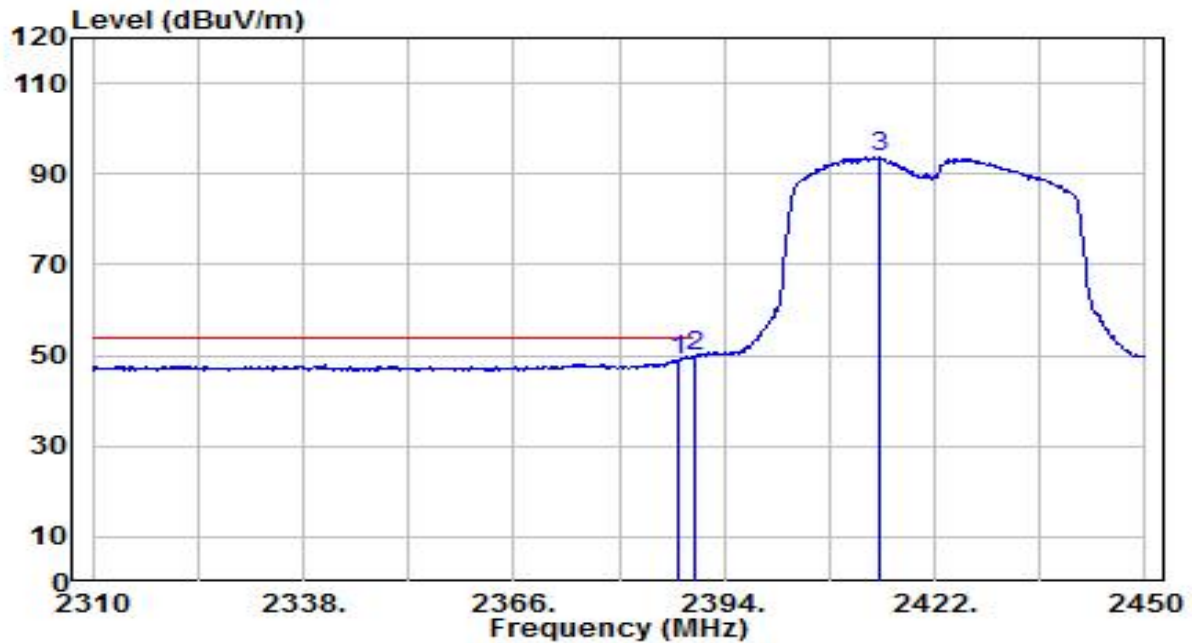


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.980	17.08	31.94	49.02	-4.98	54.00	145	200	Average
2	* 2390.000	17.74	31.95	49.69	-4.31	54.00	145	200	Average
3	2414.580	61.80	32.04	93.84	N/A	N/A	145	200	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

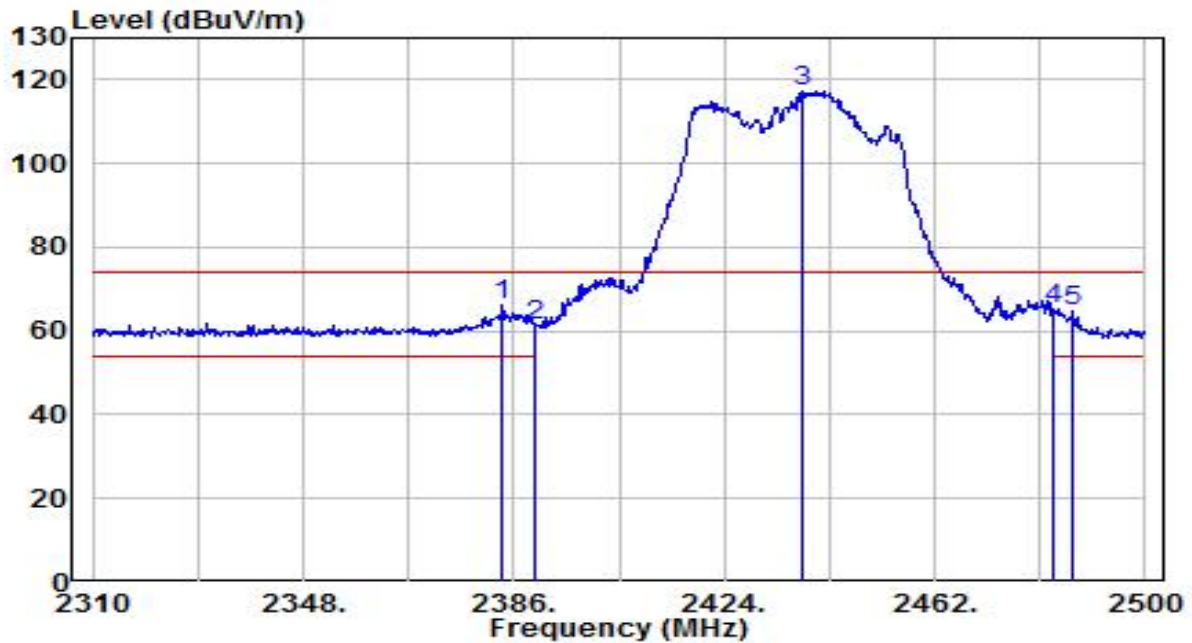


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.910	34.46	31.93	66.38	-7.62	74.00	145	290	Peak
2		2390.000	29.50	31.95	61.45	-12.55	74.00	145	290	Peak
3		2438.250	85.34	32.13	117.47	N/A	N/A	145	290	Peak
4		2483.500	32.79	32.30	65.09	-8.91	74.00	145	290	Peak
5		2487.080	32.29	32.31	64.61	-9.39	74.00	145	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

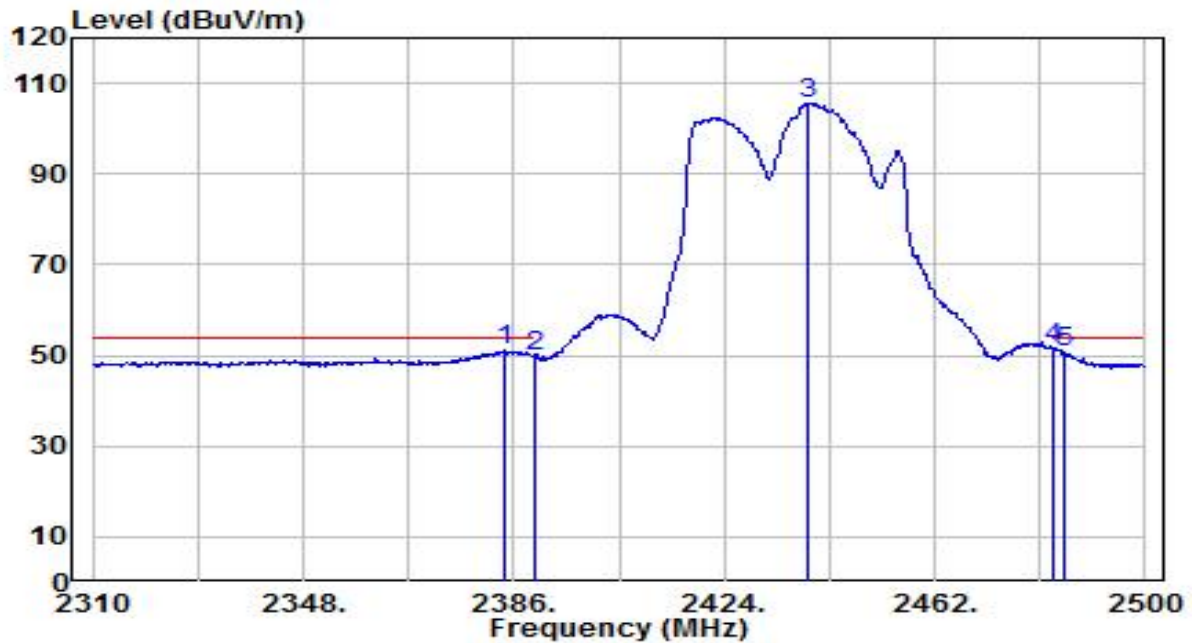


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	19.13	31.93	51.06	-2.94	54.00	145	290	Average
2	2390.000	17.86	31.95	49.81	-4.19	54.00	145	290	Average
3	2439.200	73.52	32.13	105.65	N/A	N/A	145	290	Average
4	* 2483.500	19.28	32.30	51.58	-2.42	54.00	145	290	Average
5	2485.370	18.30	32.31	50.61	-3.39	54.00	145	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

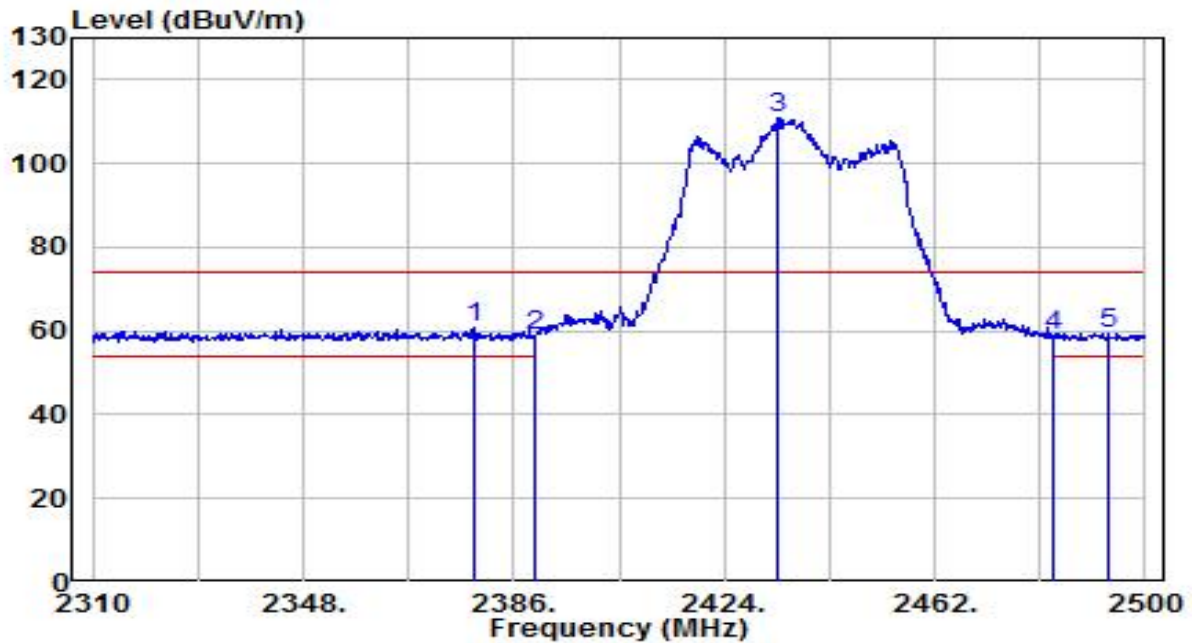


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.780	28.98	31.91	60.89	-13.11	74.00	150	225	Peak
2		2390.000	26.91	31.95	58.86	-15.14	74.00	150	225	Peak
3		2433.690	78.98	32.11	111.10	N/A	N/A	150	225	Peak
4		2483.500	26.40	32.30	58.70	-15.30	74.00	150	225	Peak
5		2493.160	26.97	32.33	59.31	-14.69	74.00	150	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

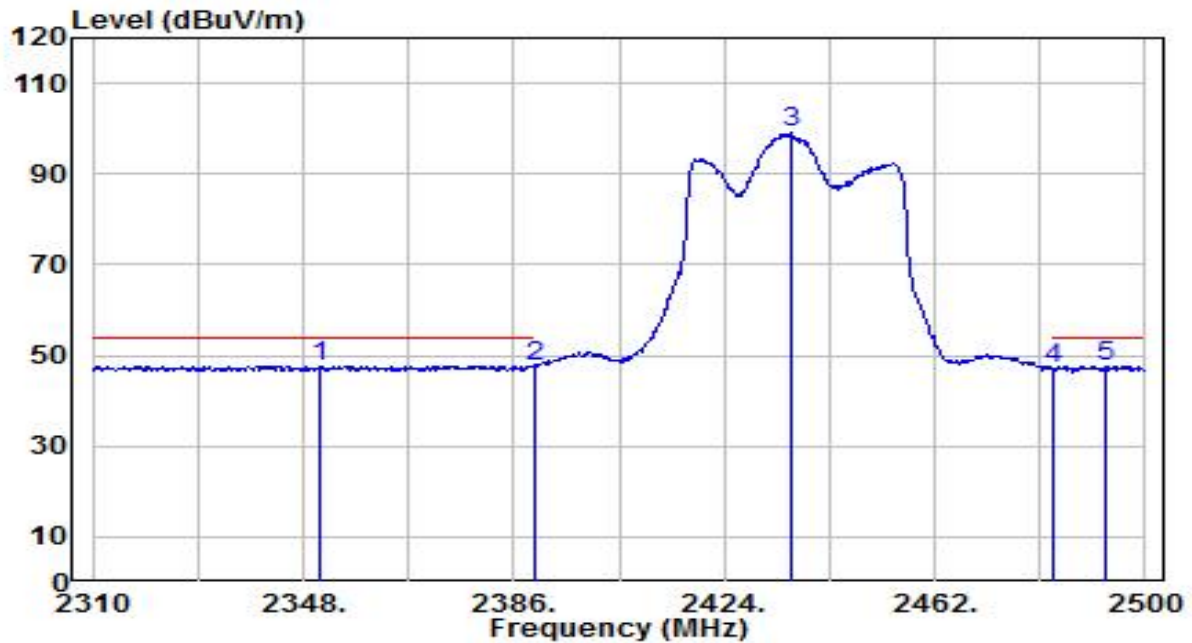


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2351.040	15.97	31.80	47.77	-6.23	54.00	150	225	Average
2		2390.000	15.49	31.95	47.44	-6.56	54.00	150	225	Average
3		2435.970	67.00	32.12	99.12	N/A	N/A	150	225	Average
4		2483.500	14.97	32.30	47.26	-6.74	54.00	150	225	Average
5		2492.780	15.21	32.33	47.55	-6.45	54.00	150	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

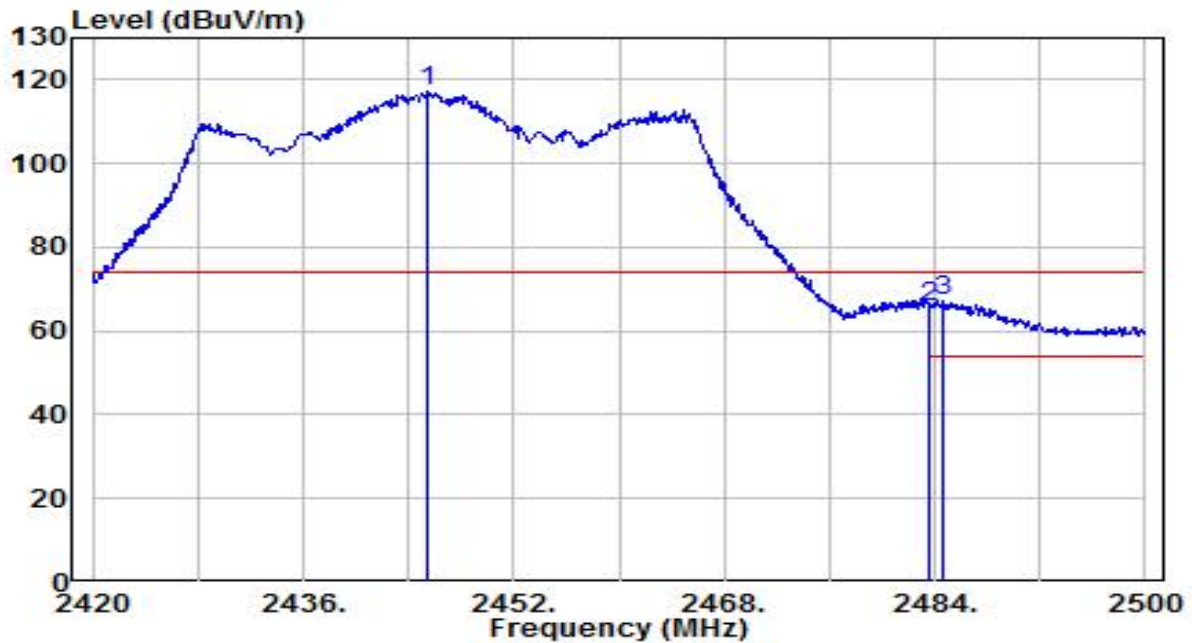


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.520	85.30	32.16	117.46	N/A	N/A	165	150	Peak
2	2483.500	33.38	32.30	65.67	-8.33	74.00	165	150	Peak
3	* 2484.640	35.10	32.30	67.40	-6.60	74.00	165	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

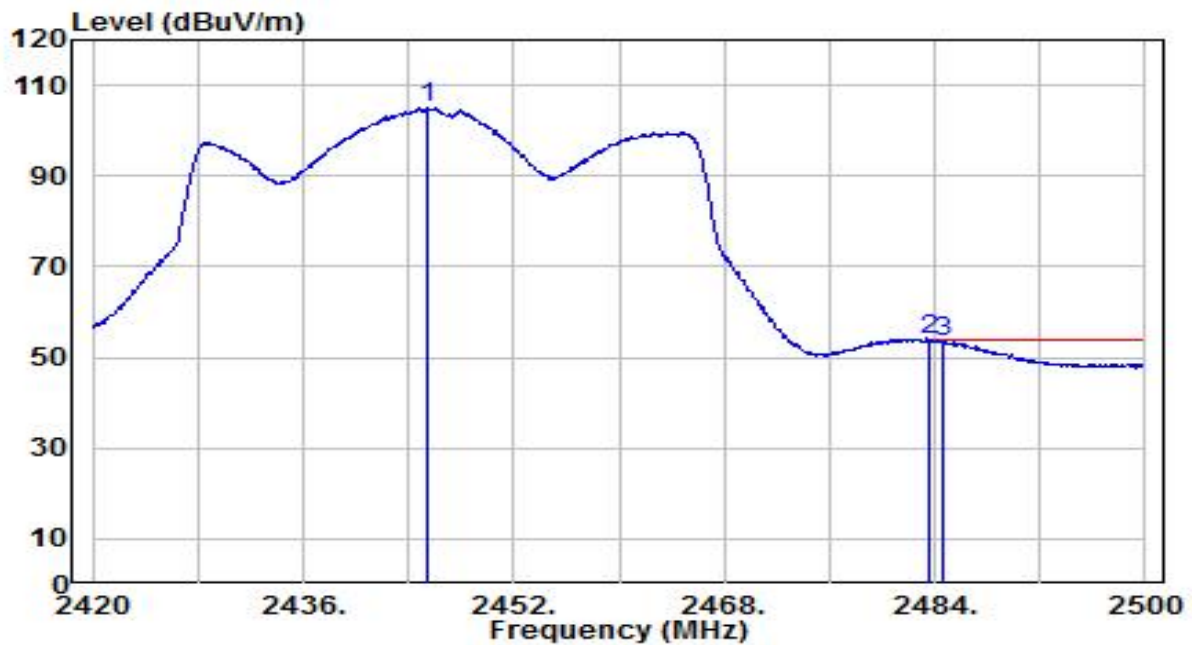


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2445.520	73.04	32.16	105.19	N/A	N/A	165	150	Average
2	*	2483.500	21.51	32.30	53.81	-0.19	54.00	165	150	Average
3		2484.560	21.22	32.30	53.52	-0.48	54.00	165	150	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

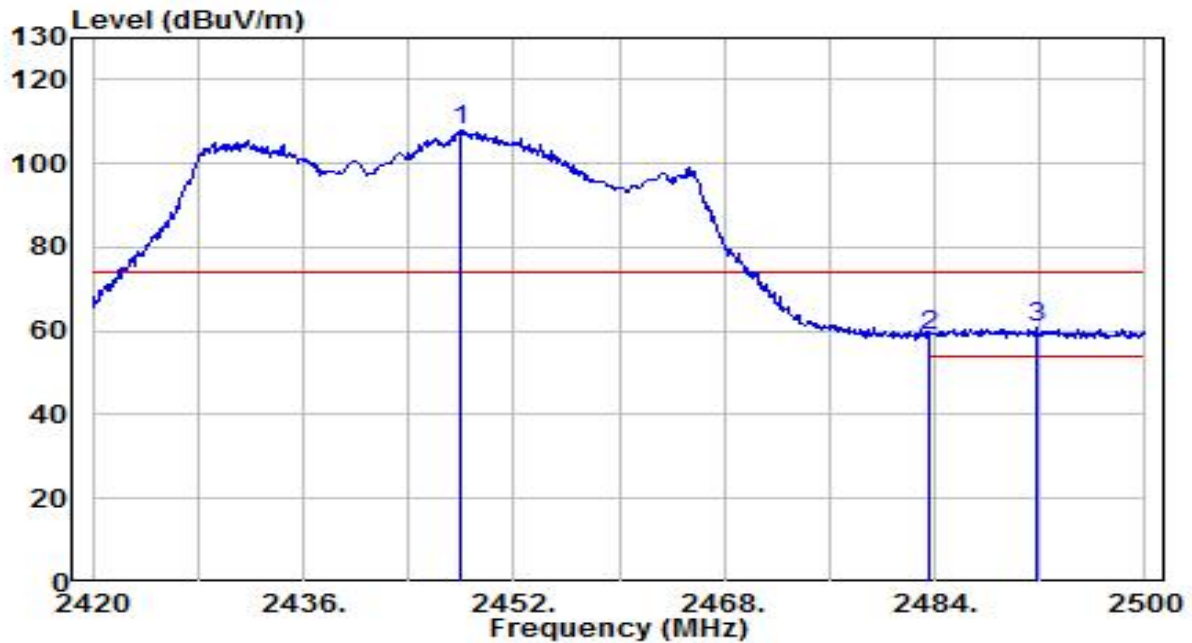


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.000	75.97	32.17	108.14	N/A	N/A	150	355	Peak
2	2483.500	26.50	32.30	58.80	-15.20	74.00	150	355	Peak
3	* 2491.680	28.37	32.33	60.70	-13.30	74.00	150	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

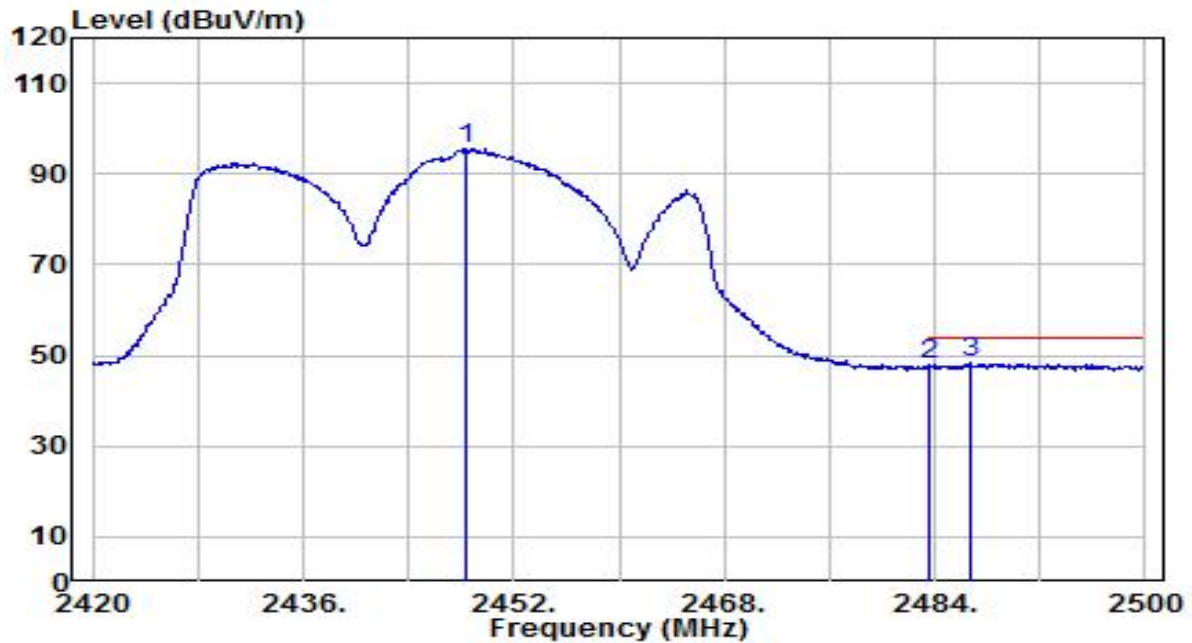


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.400	63.37	32.17	95.54	N/A	N/A	150	355	Average
2	2483.500	15.49	32.30	47.79	-6.21	54.00	150	355	Average
3	* 2486.640	16.14	32.31	48.45	-5.55	54.00	150	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

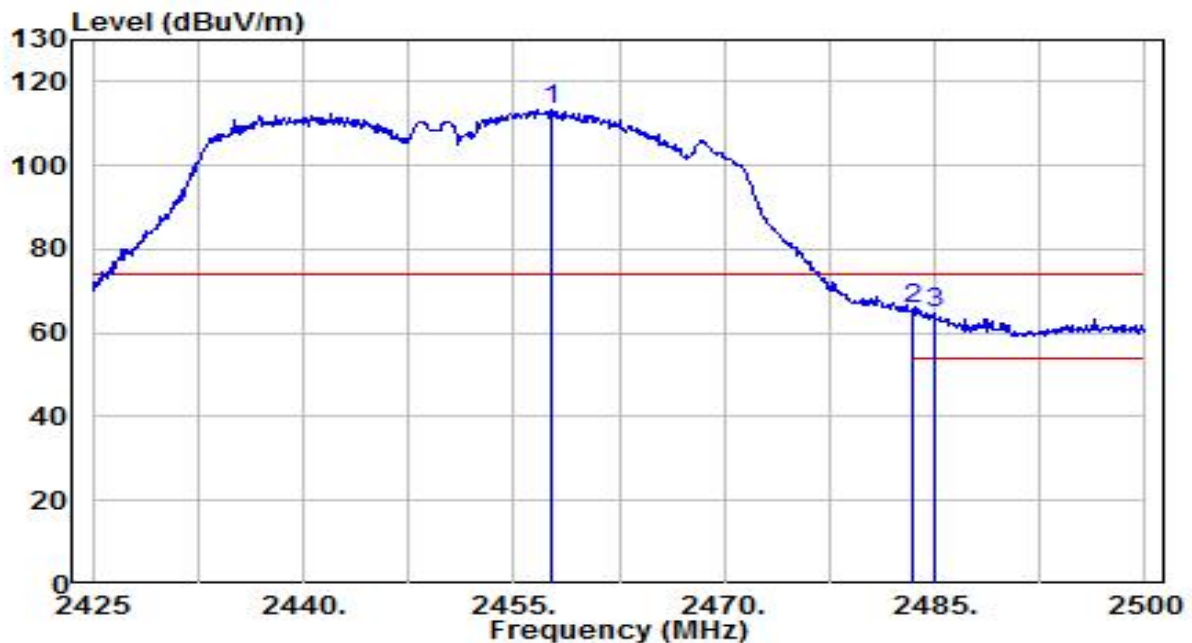


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.700	81.16	32.20	113.36	N/A	N/A	165	150	Peak
2	* 2483.500	33.68	32.30	65.98	-8.02	74.00	165	150	Peak
3	2485.000	32.52	32.30	64.82	-9.18	74.00	165	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

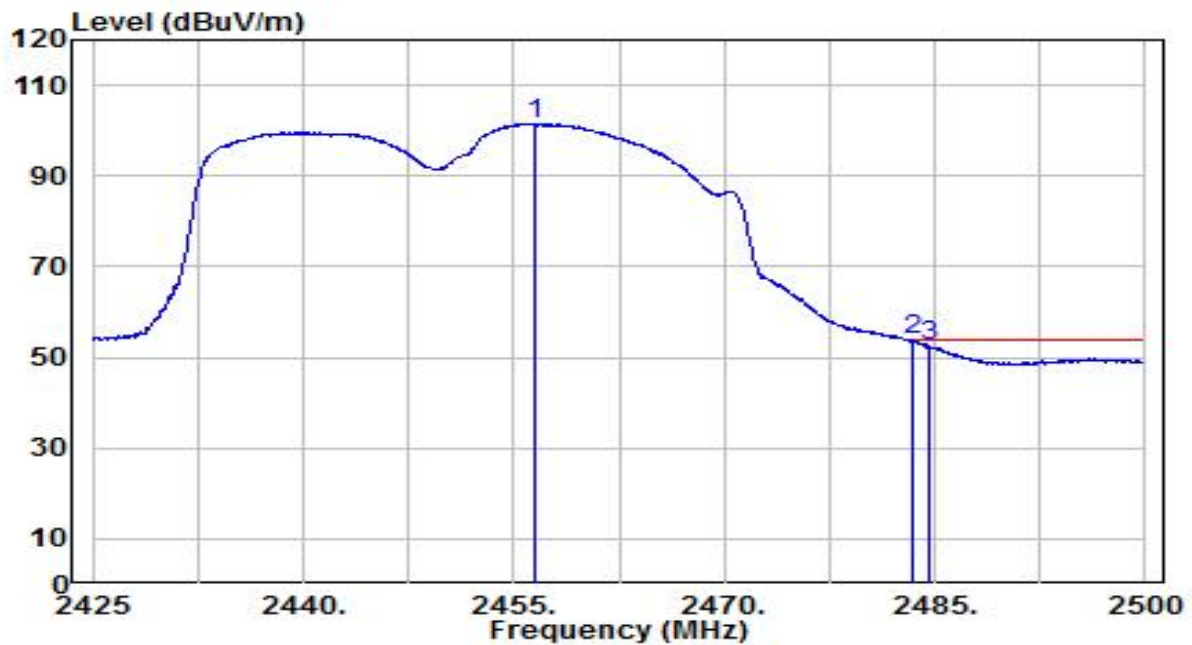


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.425	69.43	32.20	101.63	N/A	N/A	165	150	Average
2	*	2483.500	21.43	32.30	53.73	-0.27	54.00	165	150	Average
3		2484.550	20.28	32.30	52.58	-1.42	54.00	165	150	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

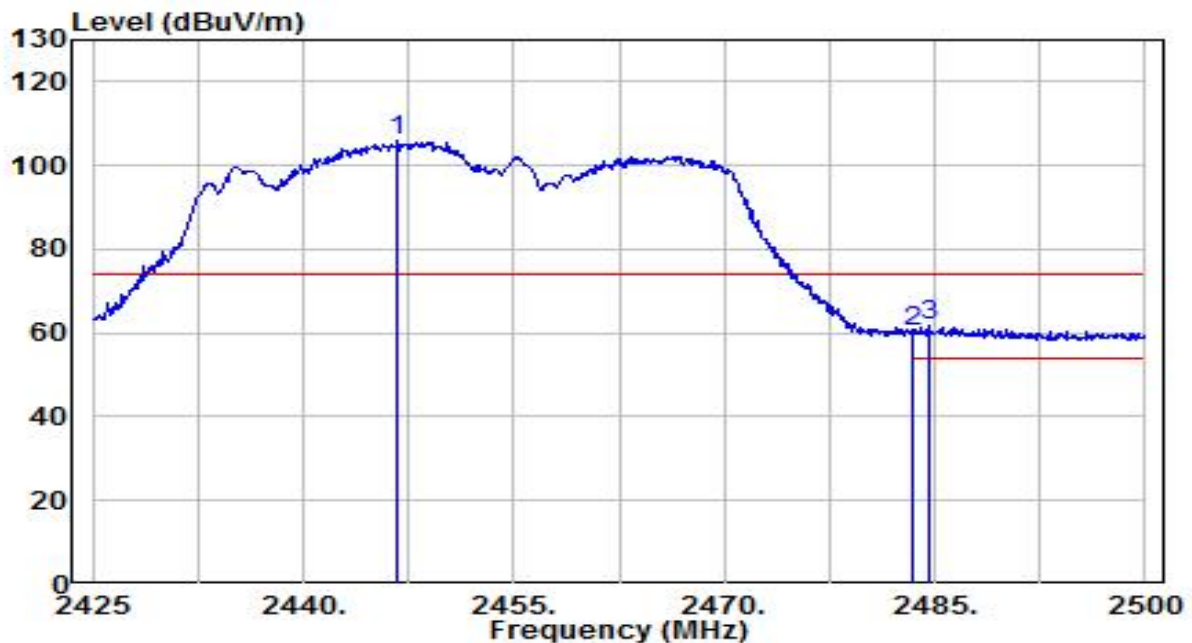


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2446.675	73.61	32.16	105.77	N/A	N/A	150	355	Peak
2	2483.500	28.23	32.30	60.53	-13.47	74.00	150	355	Peak
3	* 2484.550	29.47	32.30	61.77	-12.23	74.00	150	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

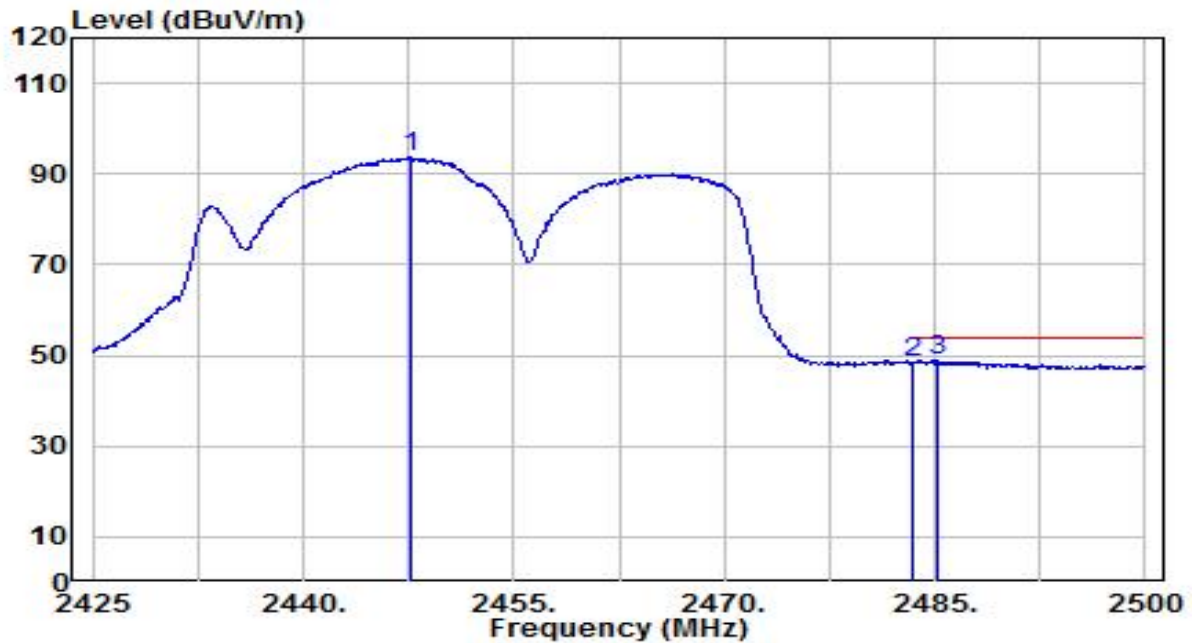


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.725	61.63	32.16	93.79	N/A	N/A	150	355	Average
2	2483.500	16.28	32.30	48.58	-5.42	54.00	150	355	Average
3	* 2485.150	16.58	32.30	48.88	-5.12	54.00	150	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

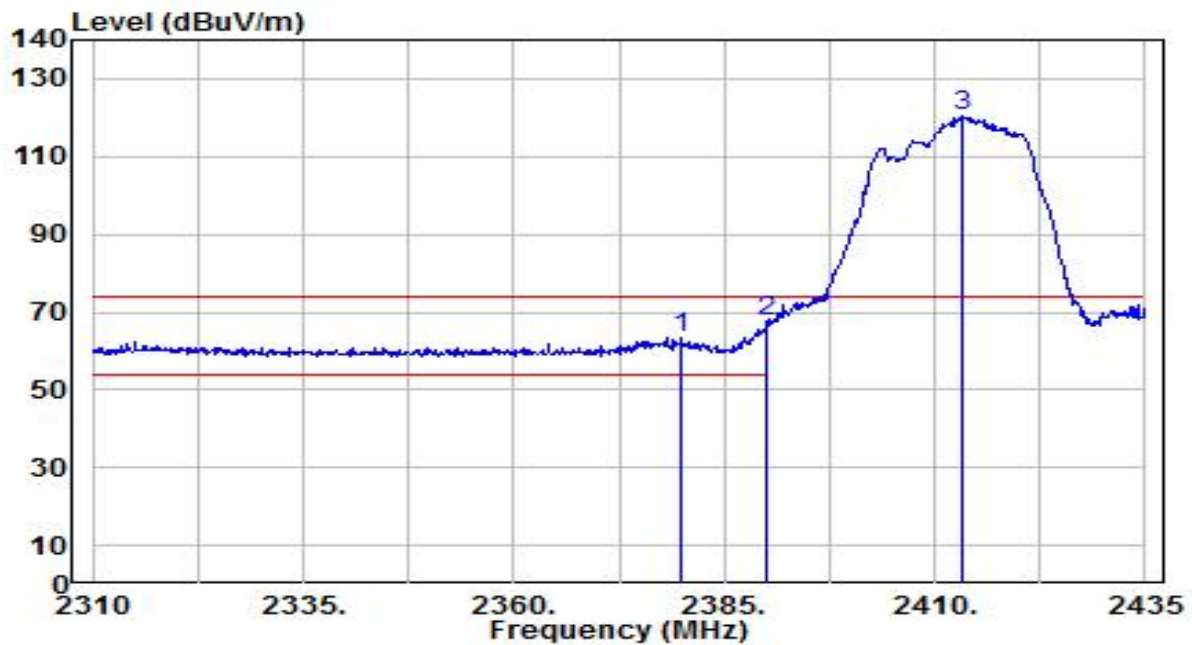


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2380.000	31.54	31.91	63.45	-10.55	74.00	170	220	Peak
2	* 2390.000	35.84	31.95	67.79	-6.21	74.00	170	220	Peak
3	2413.375	88.31	32.04	120.34	N/A	N/A	170	220	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

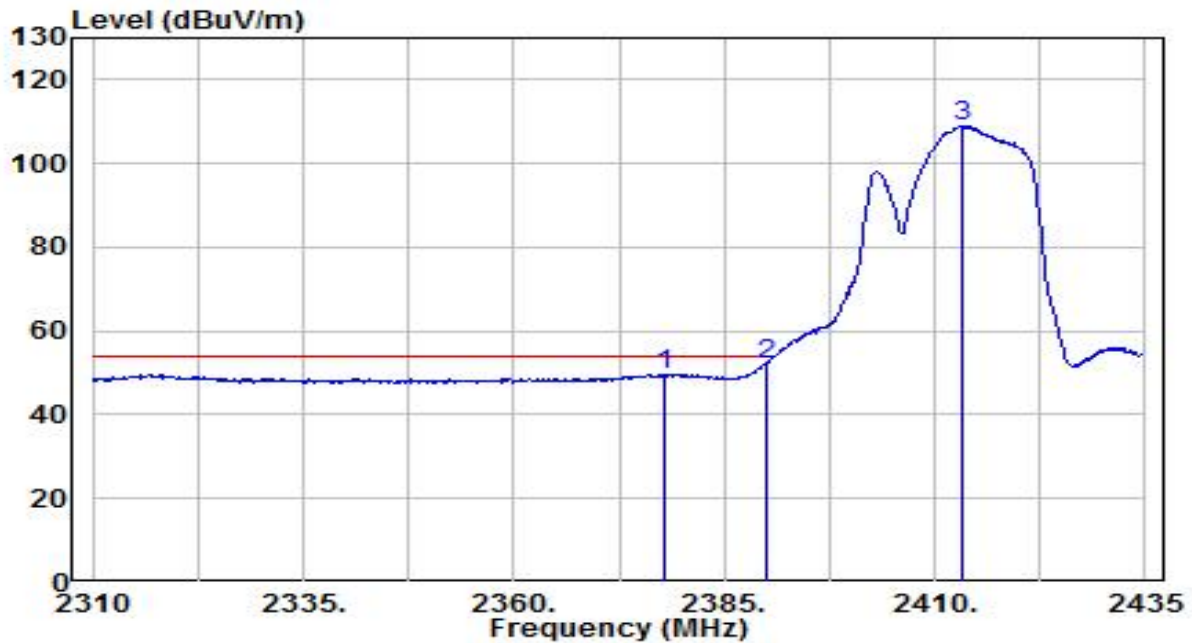


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2377.875	17.77	31.90	49.68	-4.32	54.00	170	220	Average
2	* 2390.000	20.19	31.95	52.14	-1.86	54.00	170	220	Average
3	2413.250	77.07	32.04	109.11	N/A	N/A	170	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

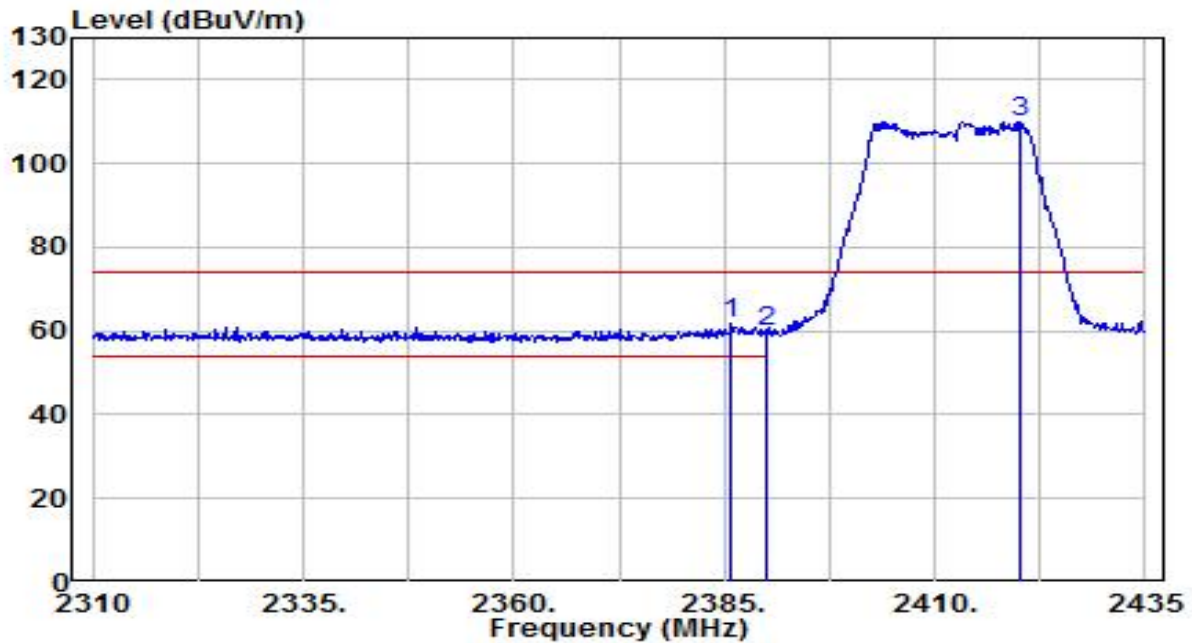


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.875	29.98	31.93	61.92	-12.08	74.00	140	200	Peak
2		2390.000	27.83	31.95	59.78	-14.22	74.00	140	200	Peak
3		2420.125	77.83	32.06	109.89	N/A	N/A	140	200	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

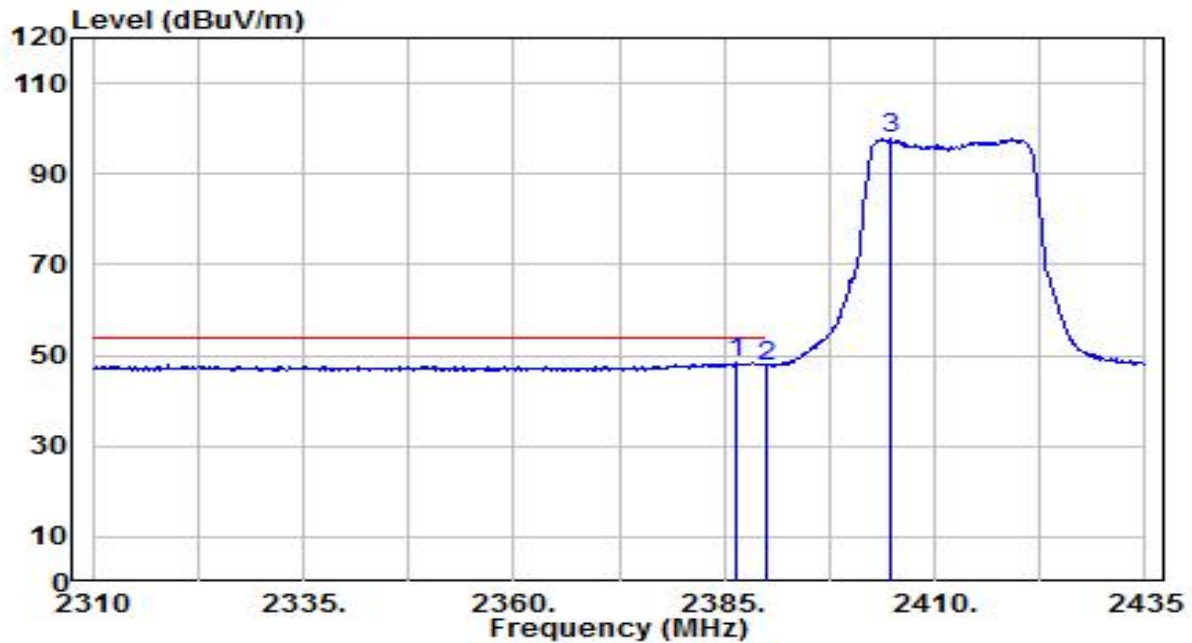


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.375	16.52	31.94	48.45	-5.55	54.00	140	200	Average
2		2390.000	15.64	31.95	47.59	-6.41	54.00	140	200	Average
3		2404.750	65.91	32.00	97.92	N/A	N/A	140	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

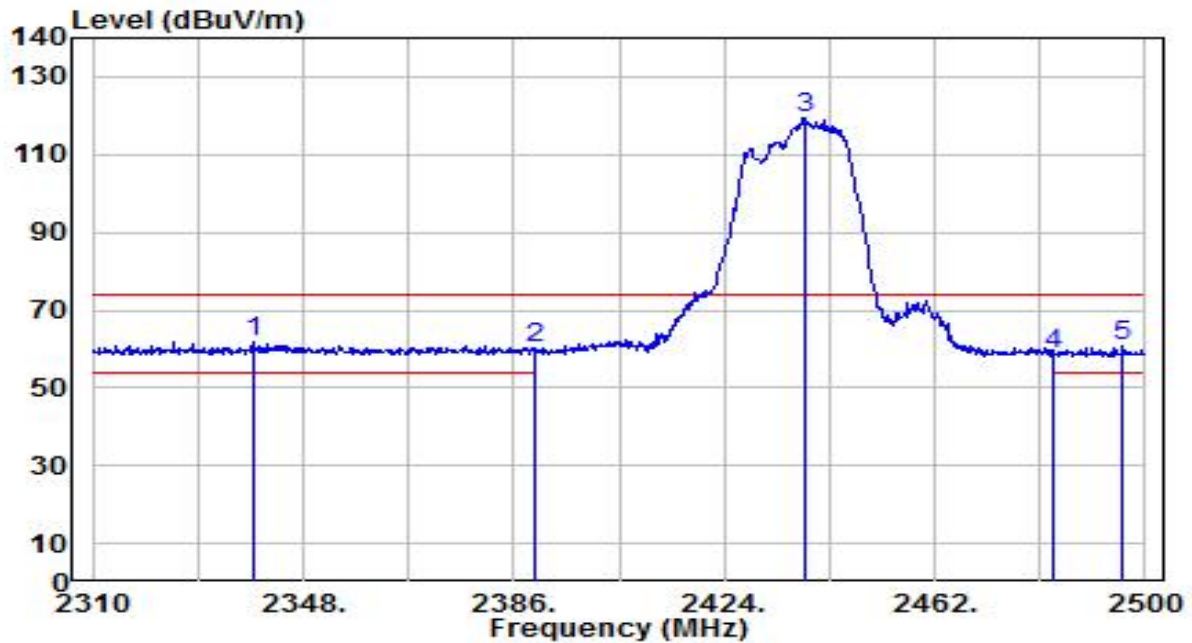


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2338.880	30.21	31.76	61.97	-12.03	74.00	155	285	Peak
2		2390.000	28.25	31.95	60.20	-13.80	74.00	155	285	Peak
3		2438.440	87.13	32.13	119.26	N/A	N/A	155	285	Peak
4		2483.500	26.38	32.30	58.68	-15.32	74.00	155	285	Peak
5		2495.820	28.39	32.34	60.74	-13.26	74.00	155	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

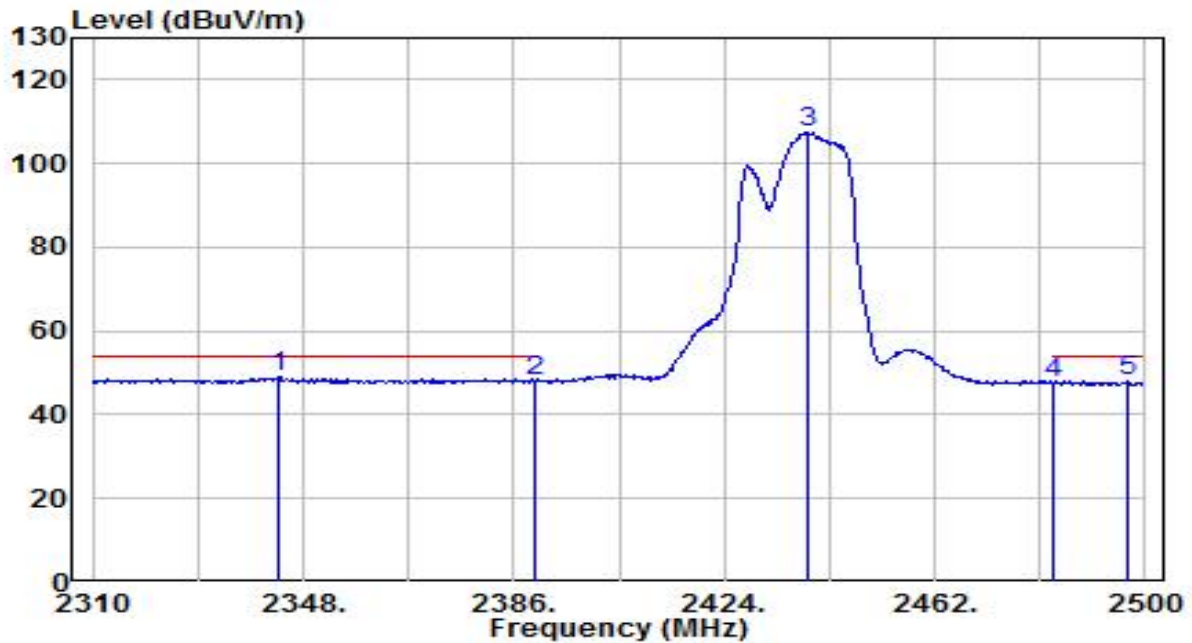


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2343.440	17.21	31.77	48.98	-5.02	54.00	155	285	Average
2		2390.000	16.20	31.95	48.15	-5.85	54.00	155	285	Average
3		2439.200	75.51	32.13	107.64	N/A	N/A	155	285	Average
4		2483.500	15.39	32.30	47.69	-6.31	54.00	155	285	Average
5		2496.770	15.58	32.35	47.93	-6.07	54.00	155	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

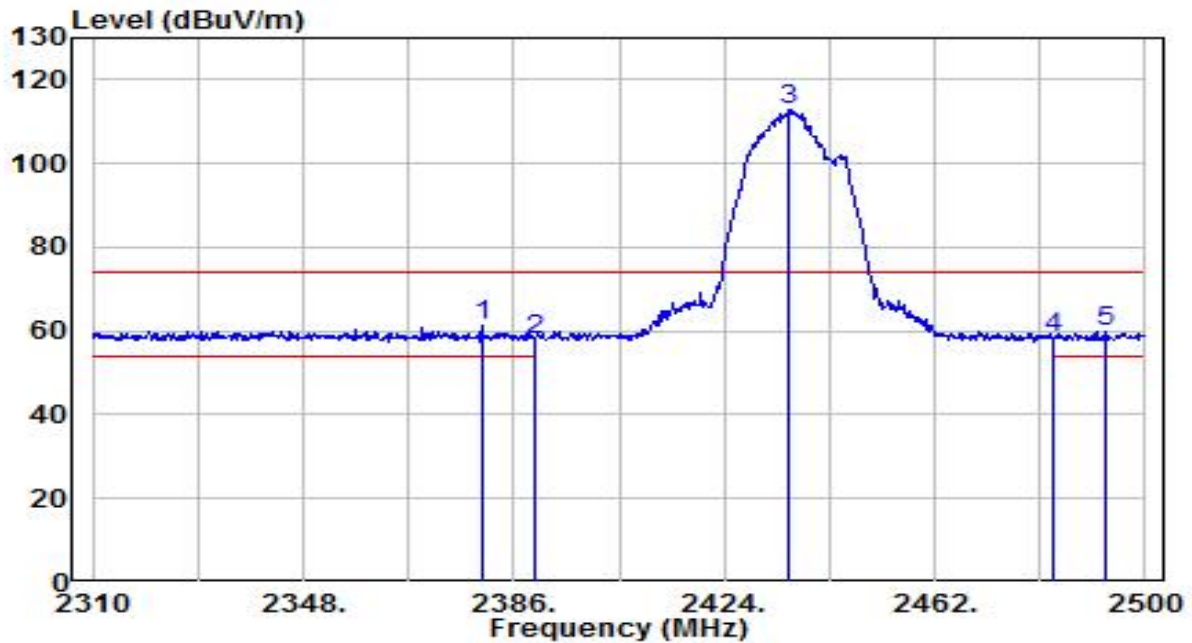


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.300	29.25	31.91	61.16	-12.84	74.00	170	185	Peak
2		2390.000	26.15	31.95	58.10	-15.90	74.00	170	185	Peak
3		2435.780	80.94	32.12	113.06	N/A	N/A	170	185	Peak
4		2483.500	25.98	32.30	58.28	-15.72	74.00	170	185	Peak
5		2492.970	27.62	32.33	59.95	-14.05	74.00	170	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

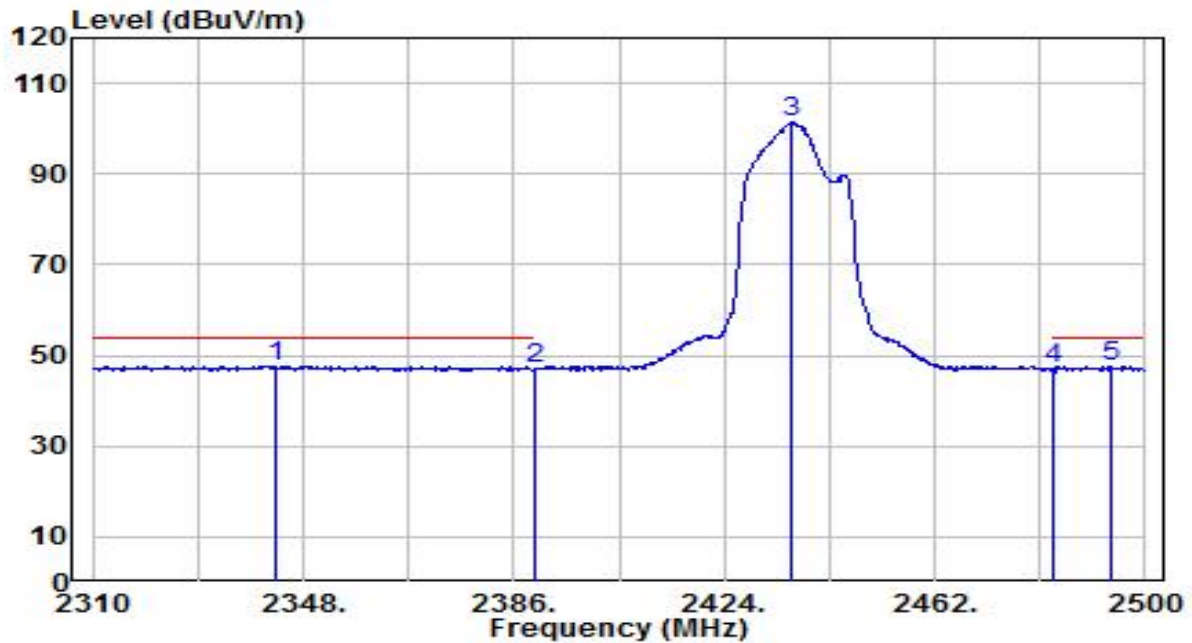


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.870	15.96	31.77	47.73	-6.27	54.00	170	185	Average
2		2390.000	14.99	31.95	46.94	-7.06	54.00	170	185	Average
3		2435.970	69.32	32.12	101.44	N/A	N/A	170	185	Average
4		2483.500	14.71	32.30	47.01	-6.99	54.00	170	185	Average
5		2493.730	15.14	32.34	47.47	-6.53	54.00	170	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

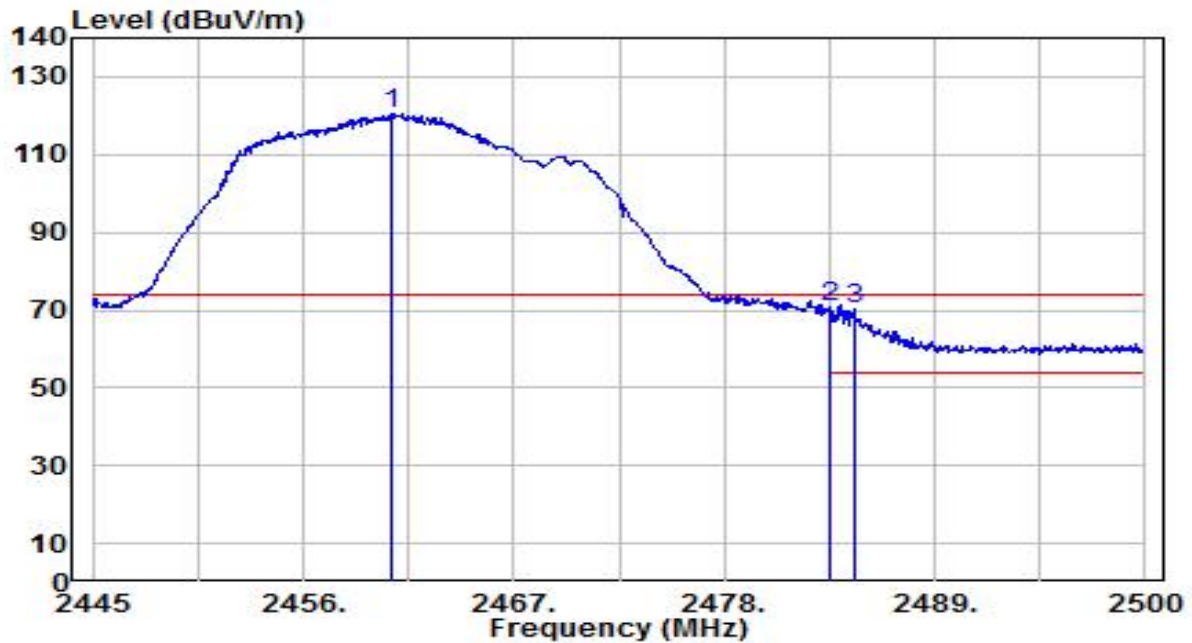


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.565	88.18	32.21	120.39	N/A	N/A	170	140	Peak
2	* 2483.500	38.60	32.30	70.90	-3.10	74.00	170	140	Peak
3	2484.765	37.74	32.30	70.05	-3.95	74.00	170	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

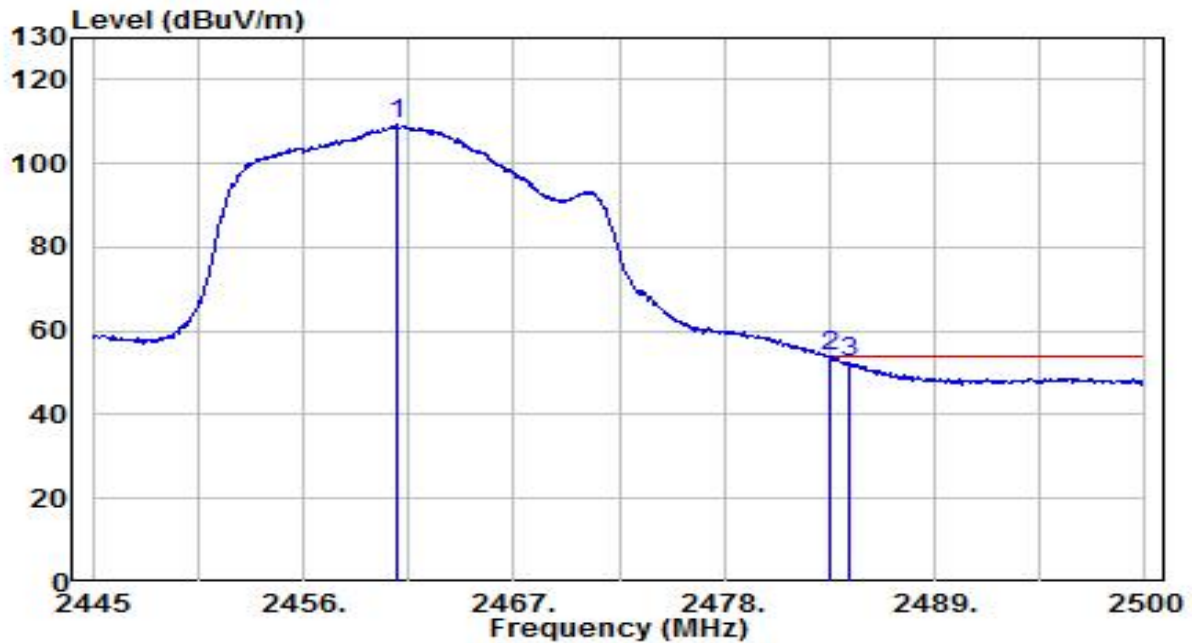


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.840	77.06	32.21	109.27	N/A	N/A	170	140	Average
2	*	2483.500	21.60	32.30	53.90	-0.10	54.00	170	140	Average
3		2484.490	20.18	32.30	52.48	-1.52	54.00	170	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

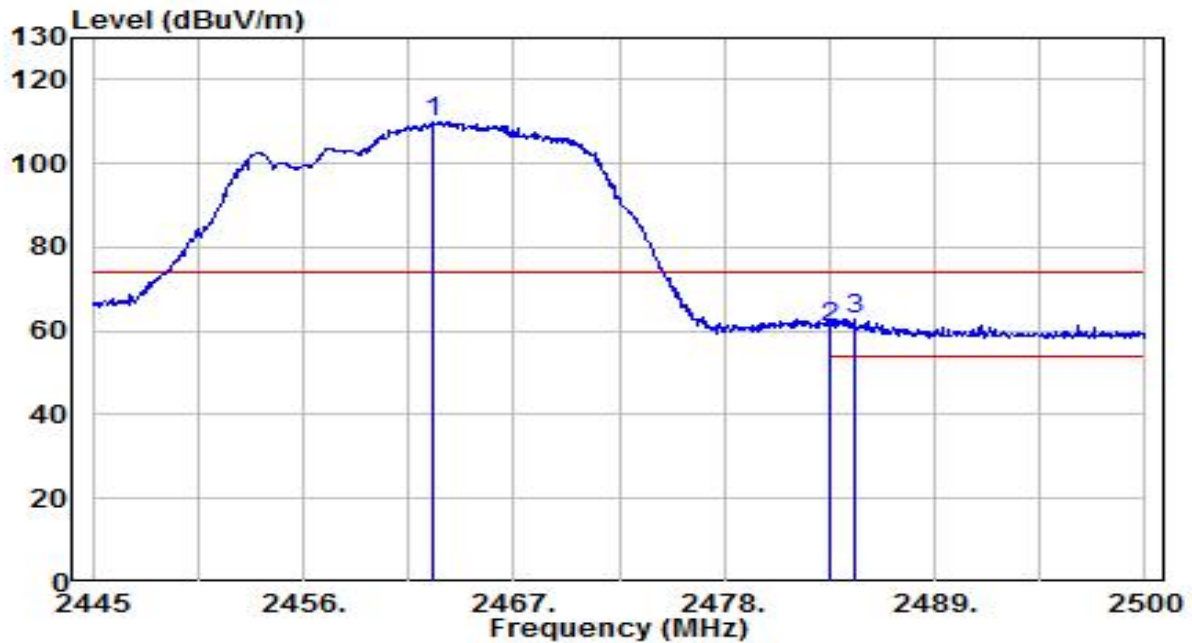


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.710	77.84	32.22	110.06	N/A	N/A	140	335	Peak
2	2483.500	28.58	32.30	60.87	-13.13	74.00	140	335	Peak
3	* 2484.765	30.37	32.30	62.67	-11.33	74.00	140	335	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

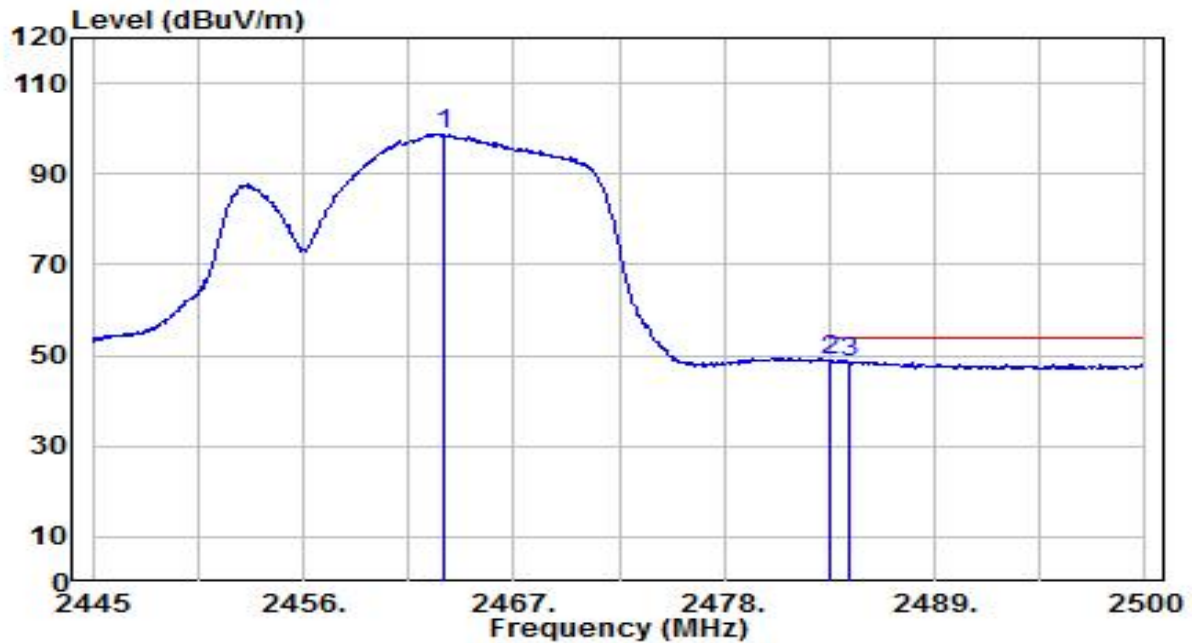


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.315	66.66	32.22	98.89	N/A	N/A	140	335	Average
2	* 2483.500	16.43	32.30	48.72	-5.28	54.00	140	335	Average
3	2484.490	16.37	32.30	48.67	-5.33	54.00	140	335	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

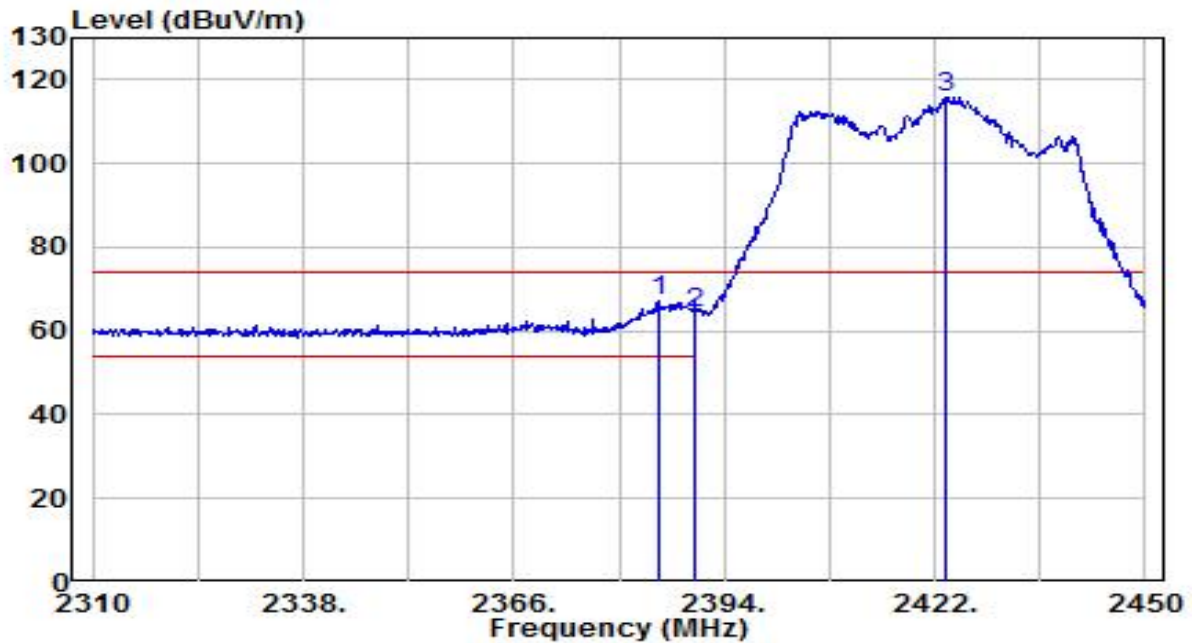


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.320	35.48	31.93	67.41	-6.59	74.00	170	220	Peak
2		2390.000	32.34	31.95	64.29	-9.71	74.00	170	220	Peak
3		2423.400	83.57	32.07	115.65	N/A	N/A	170	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

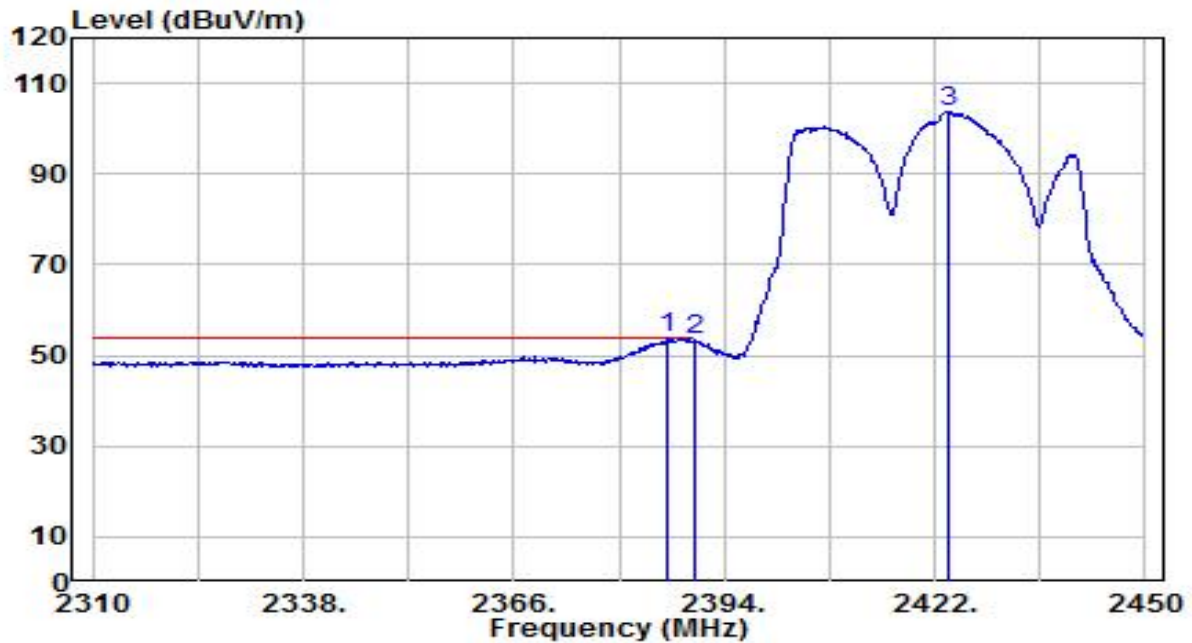


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.440	21.78	31.94	53.72	-0.28	54.00	170	220	Average
2		2390.000	21.40	31.95	53.35	-0.65	54.00	170	220	Average
3		2423.680	71.71	32.07	103.79	N/A	N/A	170	220	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

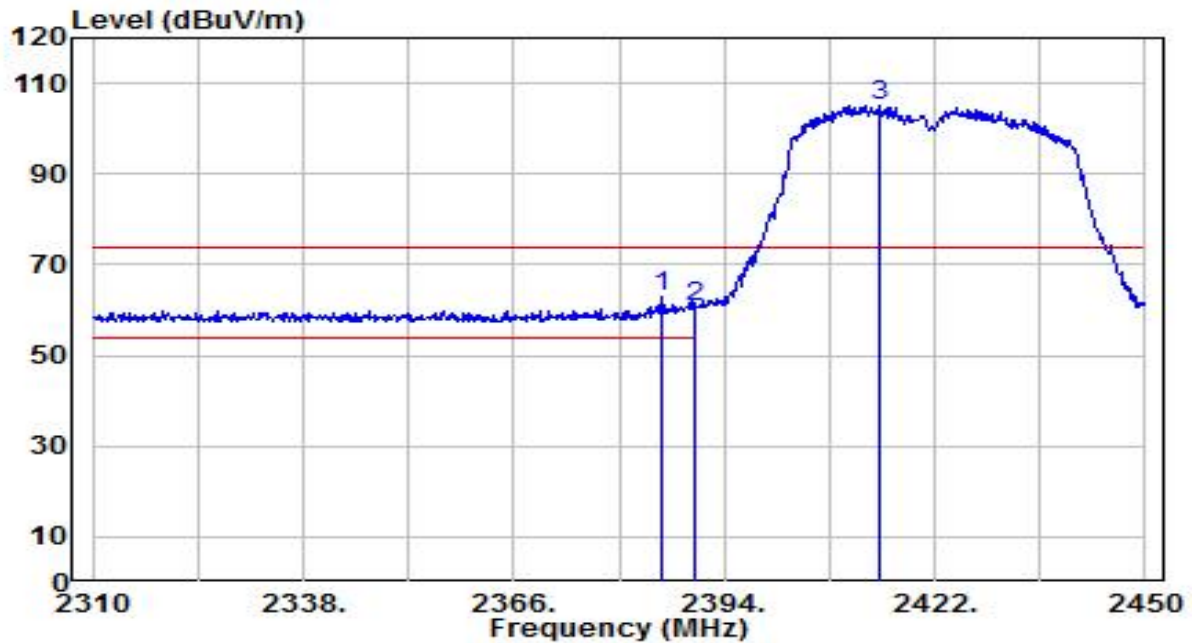


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.740	31.21	31.93	63.14	-10.86	74.00	140	200	Peak
2		2390.000	28.52	31.95	60.47	-13.53	74.00	140	200	Peak
3		2414.580	73.21	32.04	105.25	N/A	N/A	140	200	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

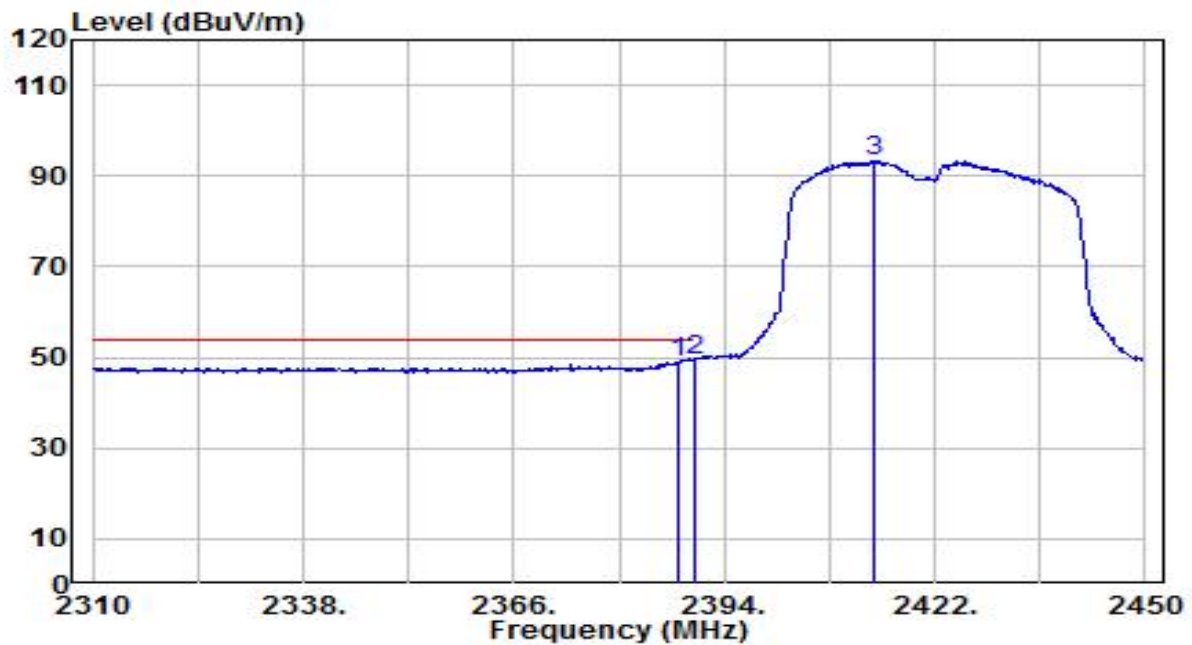


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.980	17.13	31.94	49.07	-4.93	54.00	140	200	Average
2	* 2390.000	17.50	31.95	49.45	-4.55	54.00	140	200	Average
3	2413.880	61.29	32.04	93.33	N/A	N/A	140	200	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

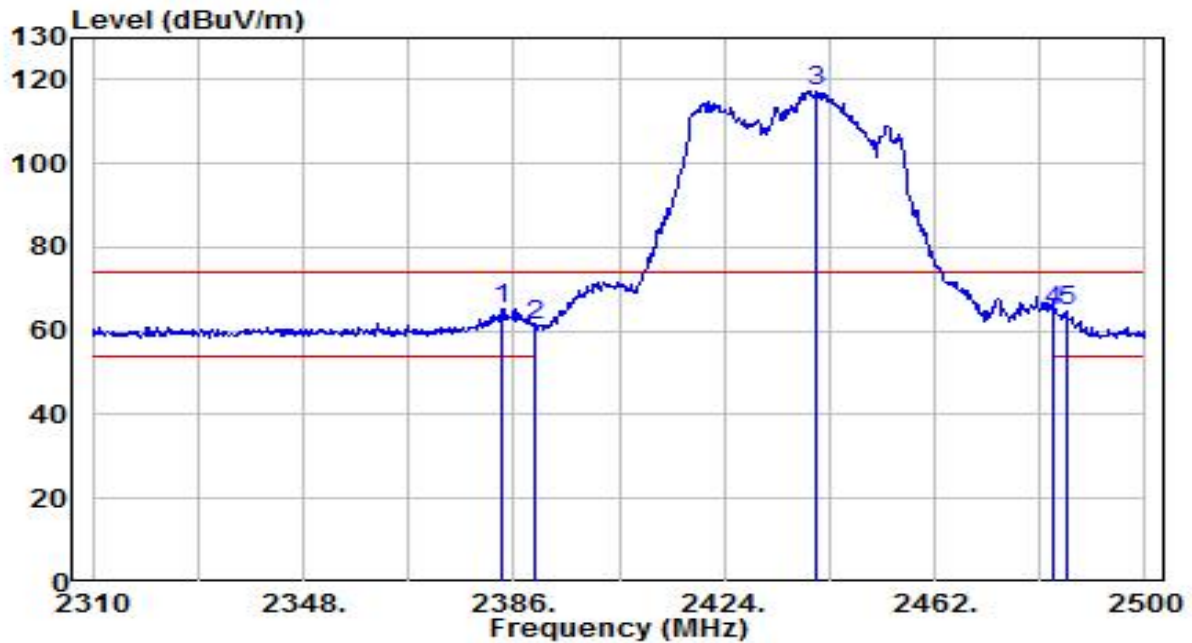


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.720	33.45	31.93	65.38	-8.62	74.00	155	285	Peak
2		2390.000	29.29	31.95	61.24	-12.76	74.00	155	285	Peak
3		2440.720	85.31	32.14	117.45	N/A	N/A	155	285	Peak
4		2483.500	32.59	32.30	64.89	-9.11	74.00	155	285	Peak
5		2485.750	32.60	32.31	64.91	-9.09	74.00	155	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

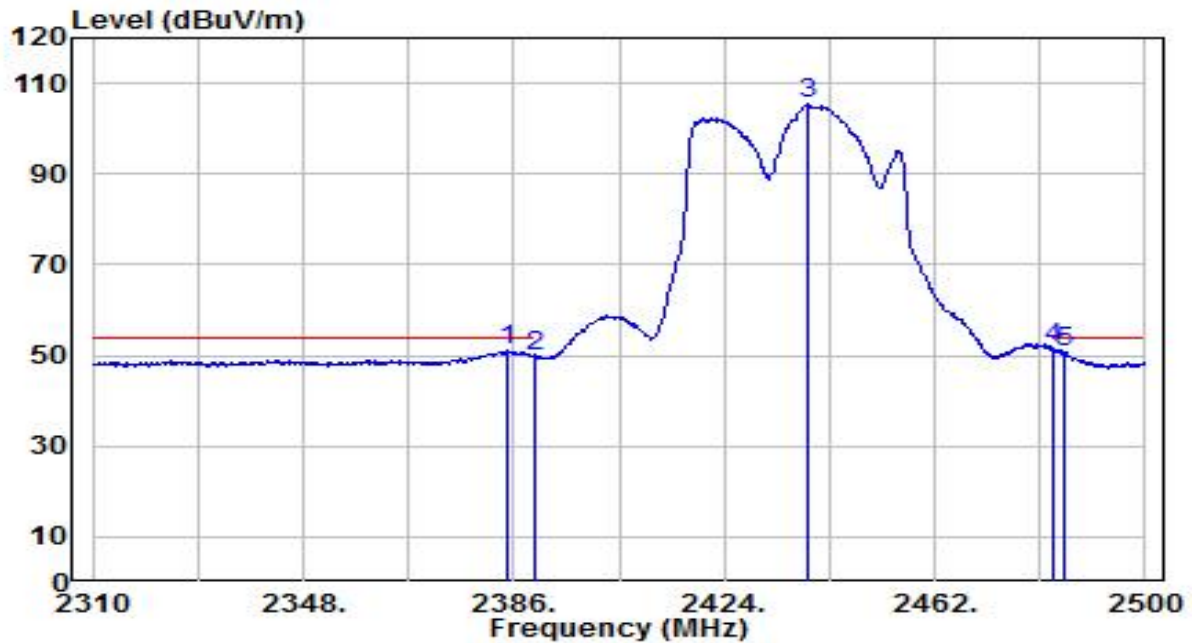


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.860	19.14	31.93	51.07	-2.93	54.00	155	285	Average
2	2390.000	17.84	31.95	49.79	-4.21	54.00	155	285	Average
3	2439.010	73.15	32.13	105.28	N/A	N/A	155	285	Average
4	* 2483.500	19.52	32.30	51.82	-2.18	54.00	155	285	Average
5	2485.560	18.31	32.31	50.62	-3.38	54.00	155	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

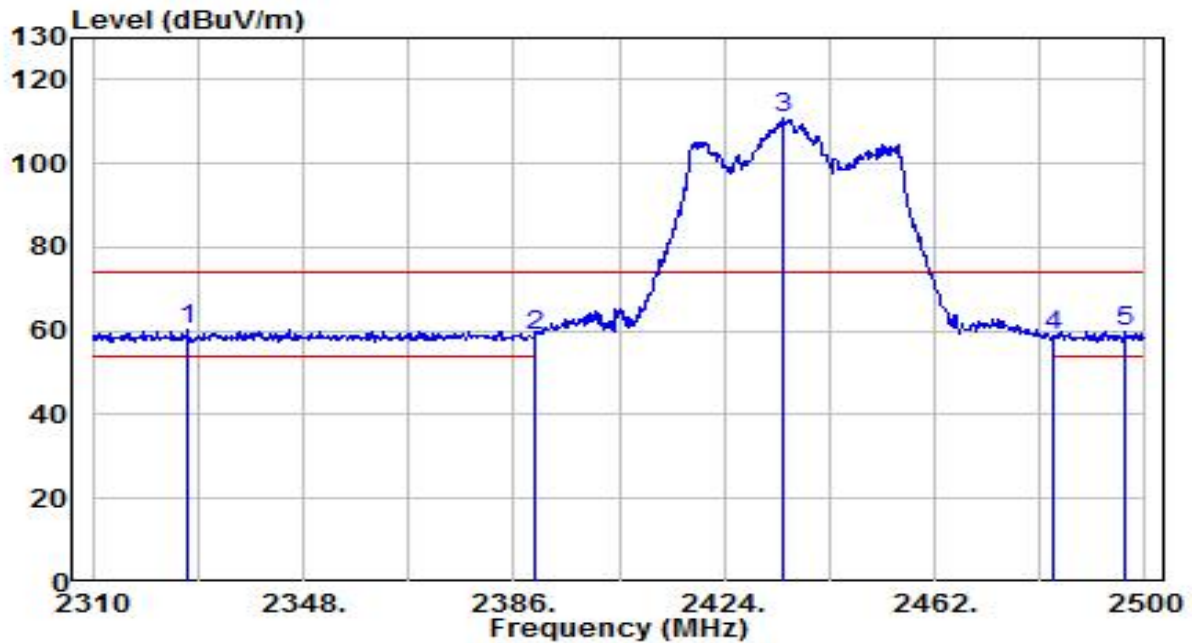


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2327.100	28.53	31.71	60.24	-13.76	74.00	170	185	Peak
2		2390.000	26.69	31.95	58.63	-15.37	74.00	170	185	Peak
3		2434.450	78.67	32.11	110.78	N/A	N/A	170	185	Peak
4		2483.500	26.54	32.30	58.84	-15.16	74.00	170	185	Peak
5		2496.390	27.69	32.35	60.04	-13.96	74.00	170	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

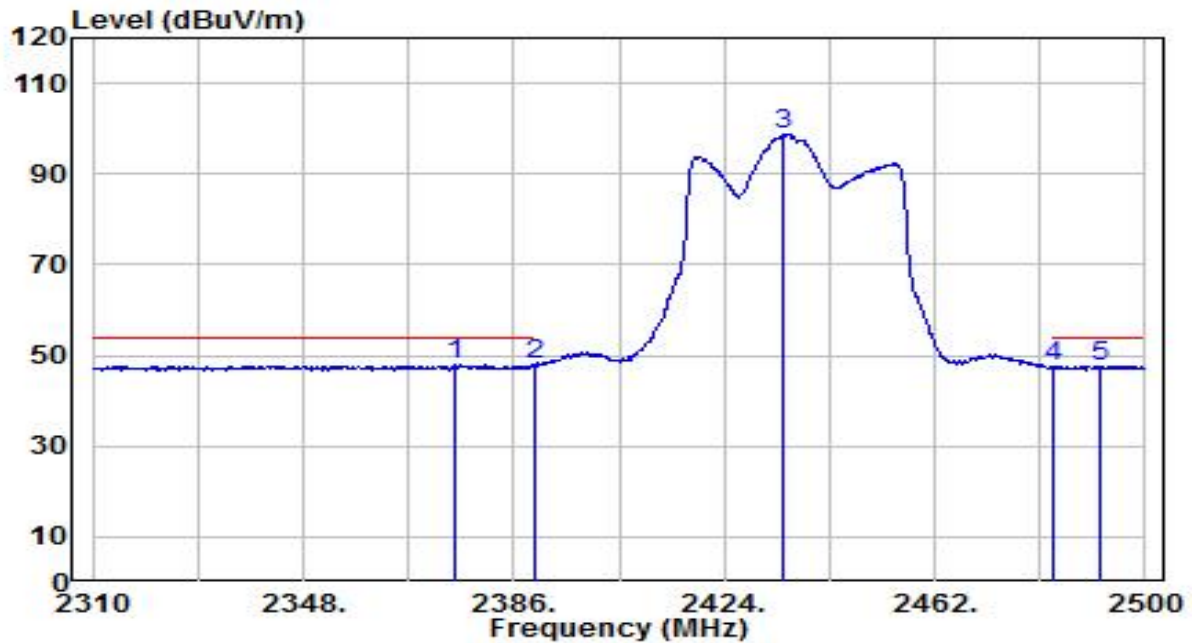


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2375.170	16.03	31.89	47.92	-6.08	54.00	170	185	Average
2		2390.000	15.90	31.95	47.85	-6.15	54.00	170	185	Average
3		2434.640	66.76	32.12	98.88	N/A	N/A	170	185	Average
4		2483.500	15.05	32.30	47.35	-6.65	54.00	170	185	Average
5		2492.020	15.44	32.33	47.77	-6.23	54.00	170	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

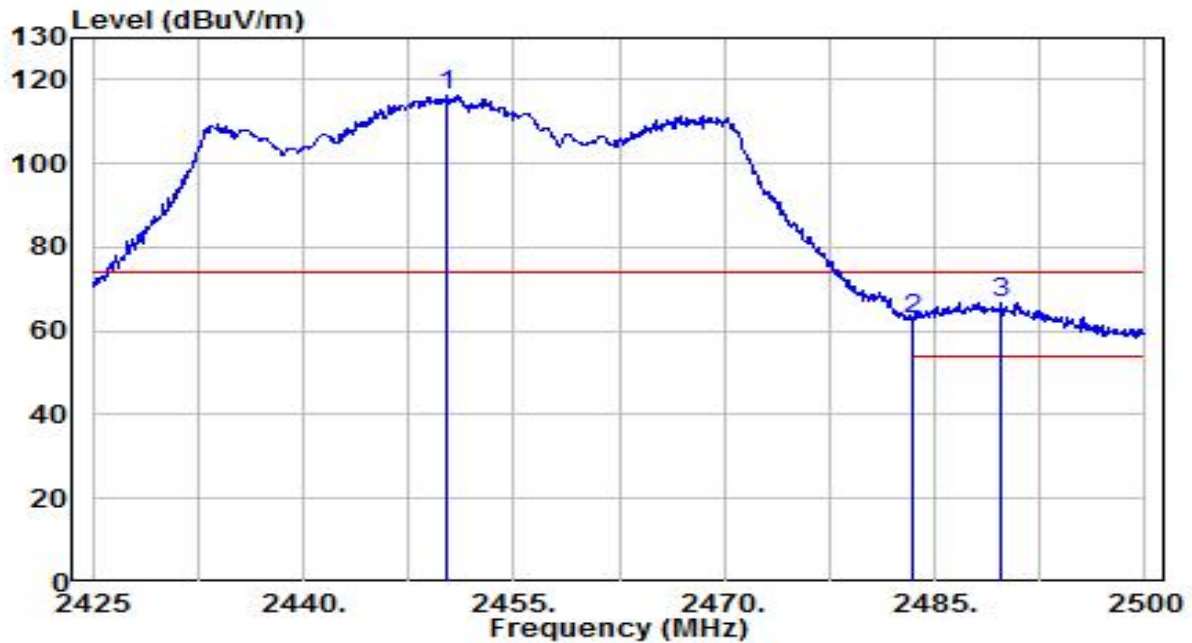


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.275	84.24	32.17	116.41	N/A	N/A	170	140	Peak
2	2483.500	30.69	32.30	62.99	-11.01	74.00	170	140	Peak
3	* 2489.800	34.31	32.32	66.63	-7.37	74.00	170	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

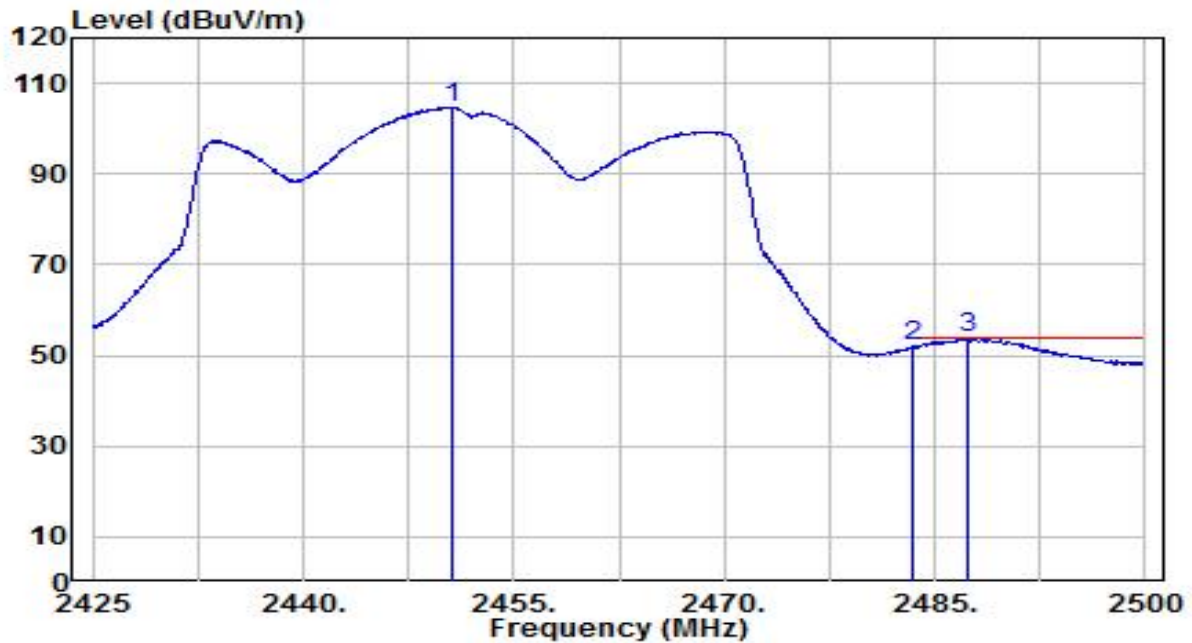


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.650	72.65	32.18	104.82	N/A	N/A	170	140	Average
2	2483.500	19.65	32.30	51.95	-2.05	54.00	170	140	Average
3	* 2487.400	21.39	32.31	53.70	-0.30	54.00	170	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

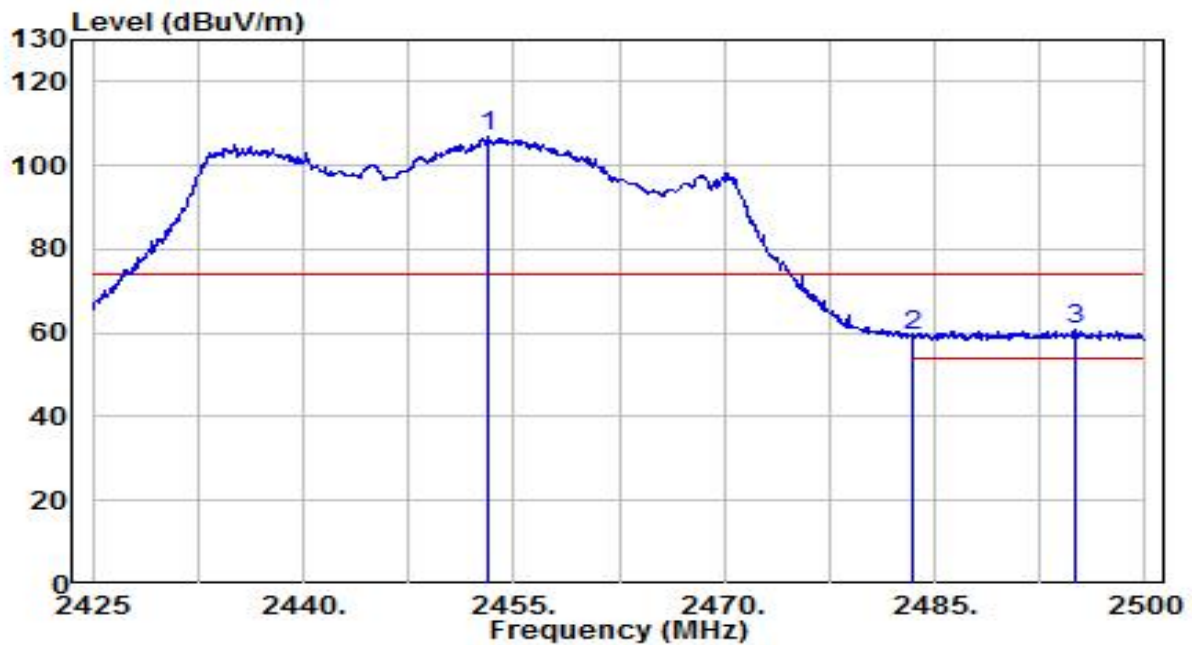


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.125	74.70	32.18	106.88	N/A	N/A	140	335	Peak
2	2483.500	27.05	32.30	59.35	-14.65	74.00	140	335	Peak
3	* 2494.975	28.52	32.34	60.86	-13.14	74.00	140	335	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Horizontal Ant	Test Voltage	By PoE

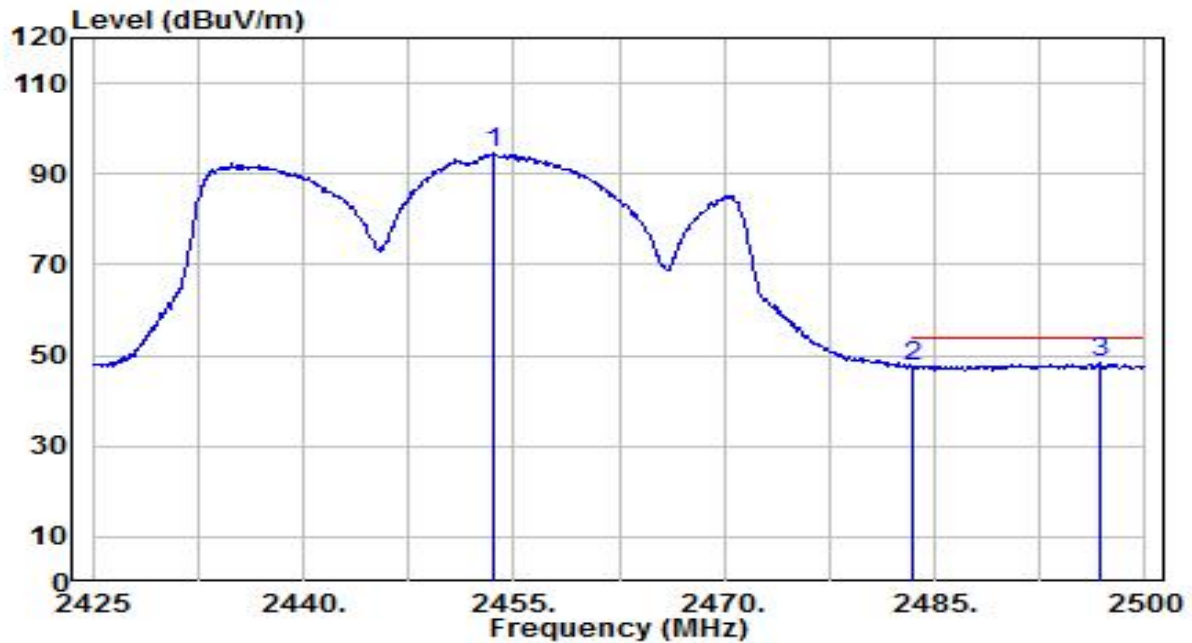


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.500	62.32	32.19	94.51	N/A	N/A	140	335	Average
2	2483.500	15.38	32.30	47.68	-6.32	54.00	140	335	Average
3	* 2496.775	16.00	32.35	48.34	-5.66	54.00	140	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

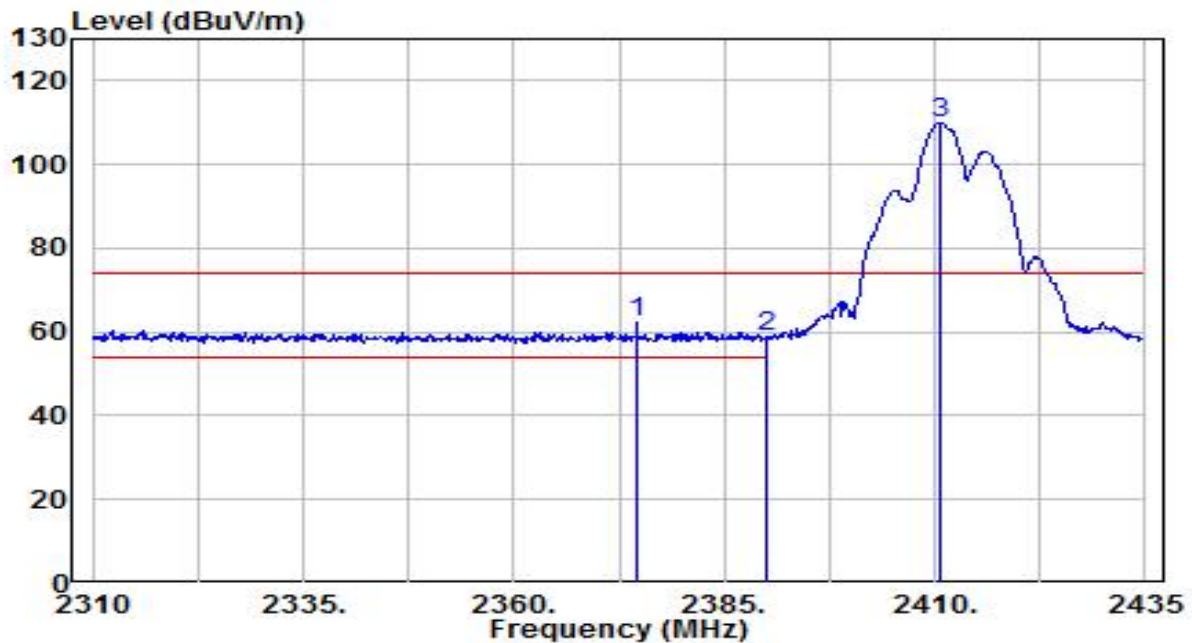


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2374.625	30.23	31.89	62.12	-11.88	74.00	145	45	Peak
2		2390.000	27.06	31.95	59.01	-14.99	74.00	145	45	Peak
3		2410.750	78.10	32.03	110.13	N/A	N/A	145	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

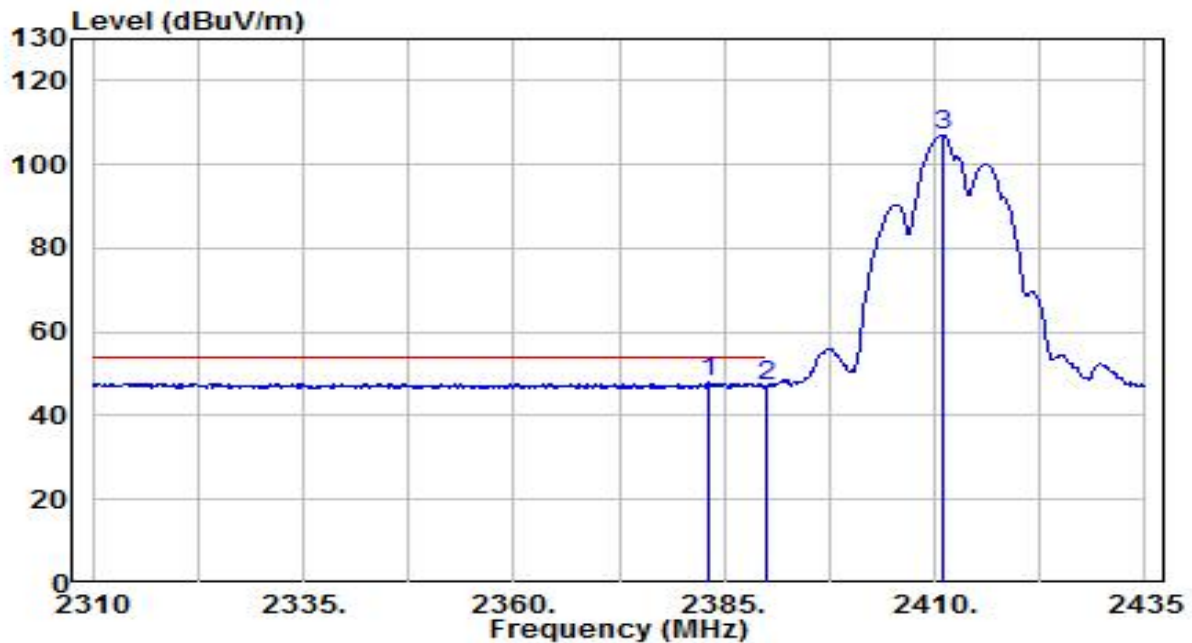


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.125	15.93	31.92	47.86	-6.14	54.00	145	45	Average
2		2390.000	15.07	31.95	47.02	-6.98	54.00	145	45	Average
3		2411.000	75.06	32.03	107.08	N/A	N/A	145	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

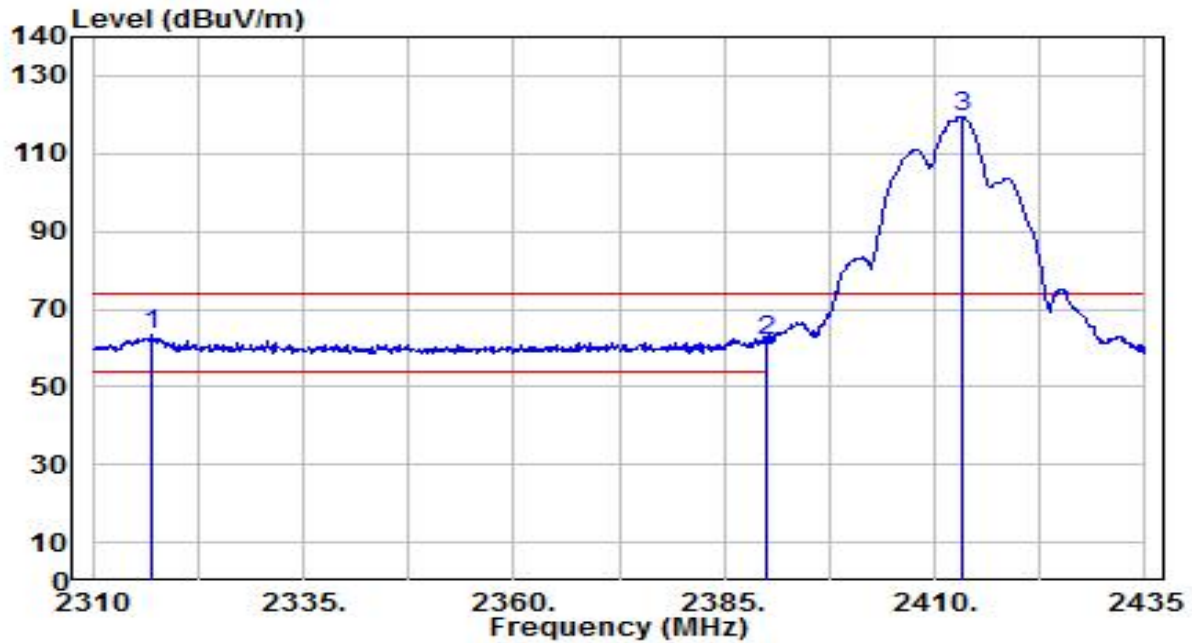


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2317.000	31.67	31.68	63.34	-10.66	74.00	150	160	Peak
2		2390.000	29.94	31.95	61.89	-12.11	74.00	150	160	Peak
3		2413.125	87.59	32.04	119.63	N/A	N/A	150	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

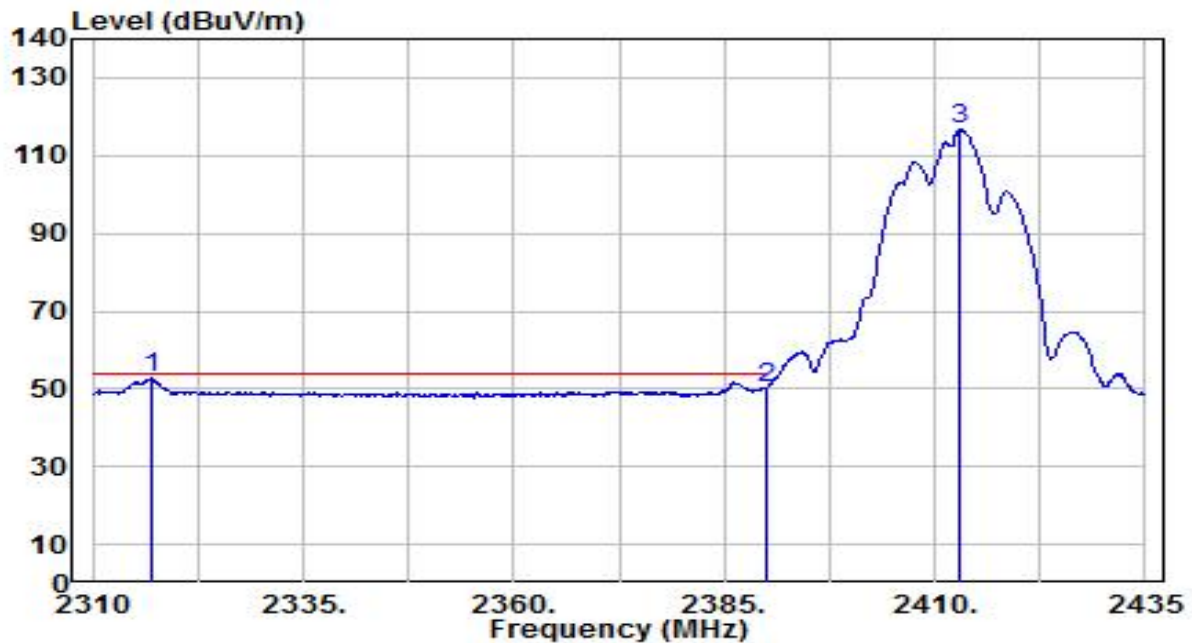


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2317.125	21.05	31.68	52.73	-1.27	54.00	150	160	Average
2		2390.000	18.17	31.95	50.12	-3.88	54.00	150	160	Average
3		2413.000	84.54	32.03	116.58	N/A	N/A	150	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

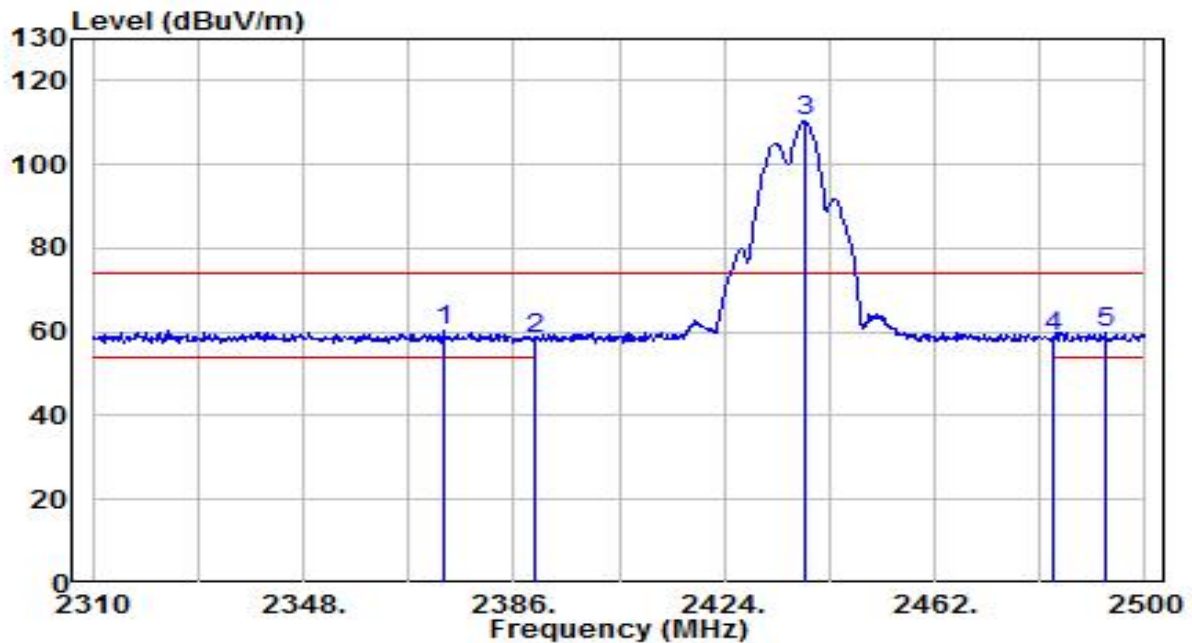


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2373.270	28.40	31.89	60.29	-13.71	74.00	135	45	Peak
2		2390.000	26.31	31.95	58.26	-15.74	74.00	135	45	Peak
3		2438.440	78.13	32.13	110.26	N/A	N/A	135	45	Peak
4		2483.500	26.78	32.30	59.08	-14.92	74.00	135	45	Peak
5		2492.780	27.61	32.33	59.95	-14.05	74.00	135	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

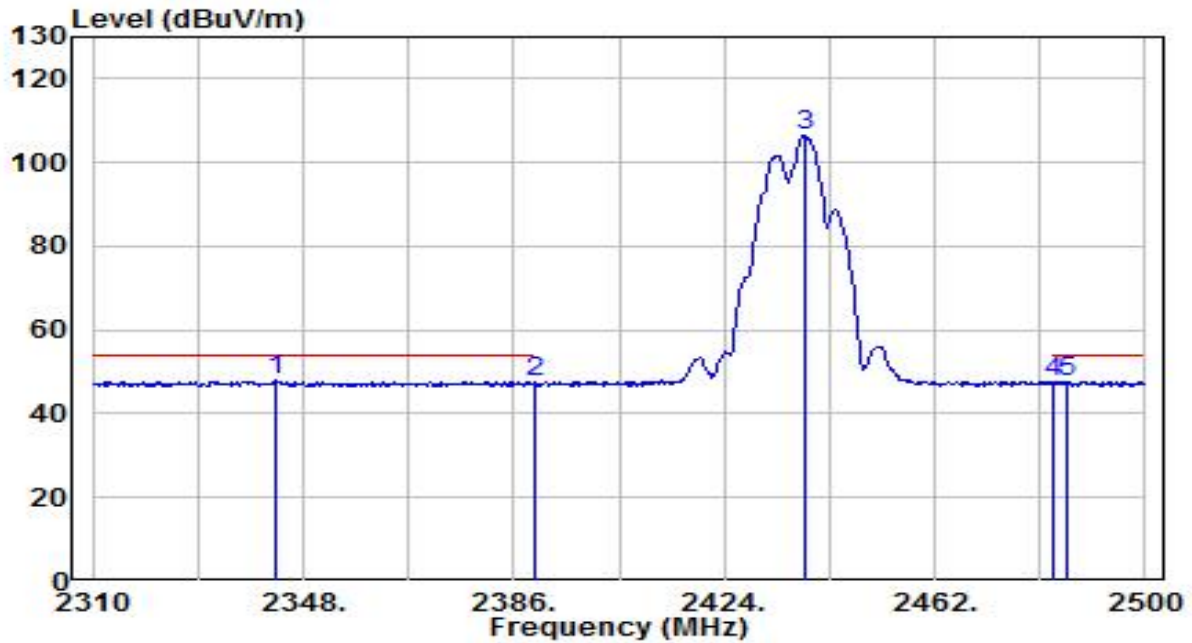


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.870	16.09	31.77	47.87	-6.13	54.00	135	45	Average
2		2390.000	15.55	31.95	47.50	-6.50	54.00	135	45	Average
3		2438.630	74.36	32.13	106.49	N/A	N/A	135	45	Average
4		2483.500	15.25	32.30	47.55	-6.45	54.00	135	45	Average
5		2485.750	15.43	32.31	47.73	-6.27	54.00	135	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

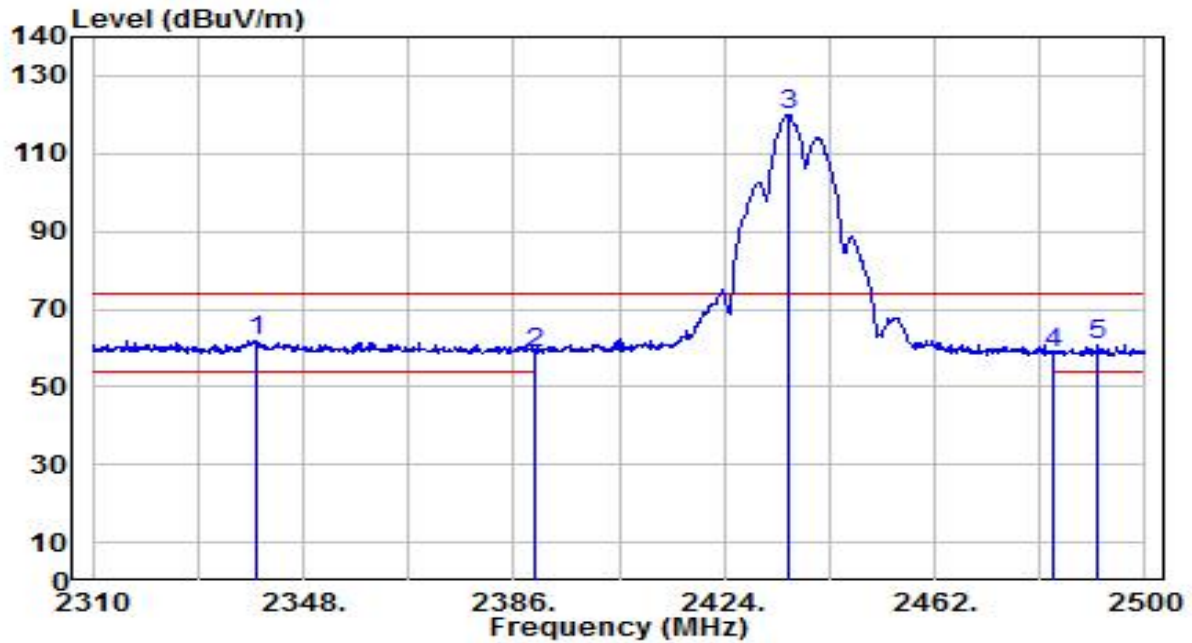


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.450	30.08	31.76	61.84	-12.16	74.00	160	155	Peak
2		2390.000	26.88	31.95	58.83	-15.17	74.00	160	155	Peak
3		2435.590	87.98	32.12	120.10	N/A	N/A	160	155	Peak
4		2483.500	26.21	32.30	58.51	-15.49	74.00	160	155	Peak
5		2491.450	28.34	32.33	60.67	-13.33	74.00	160	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

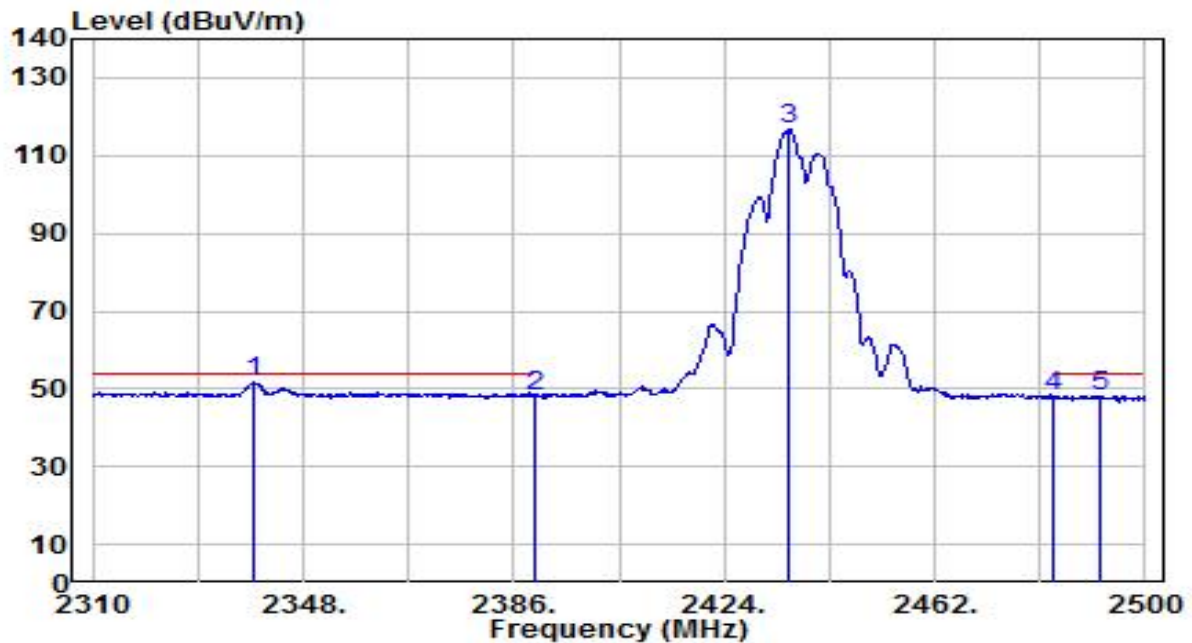


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2338.880	19.79	31.76	51.55	-2.45	54.00	160	155	Average
2		2390.000	16.03	31.95	47.98	-6.02	54.00	160	155	Average
3		2435.780	84.58	32.12	116.70	N/A	N/A	160	155	Average
4		2483.500	15.64	32.30	47.94	-6.06	54.00	160	155	Average
5		2492.020	15.93	32.33	48.26	-5.74	54.00	160	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

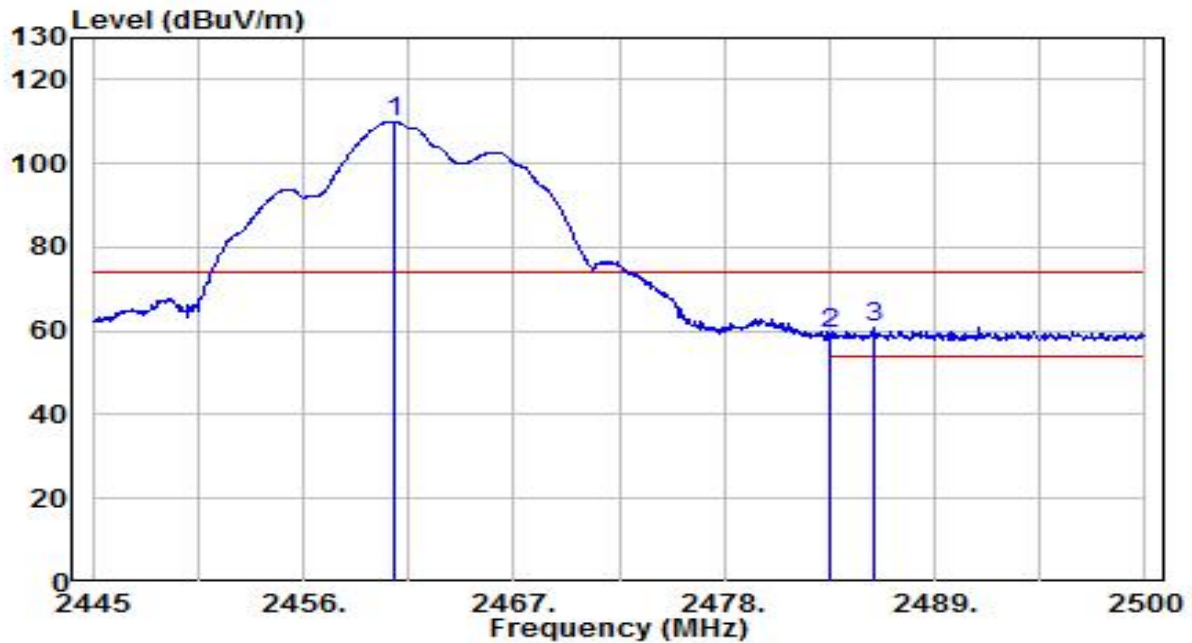


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.730	77.90	32.21	110.11	N/A	N/A	135	320	Peak
2	2483.500	27.27	32.30	59.57	-14.43	74.00	135	320	Peak
3	* 2485.810	28.66	32.31	60.97	-13.03	74.00	135	320	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

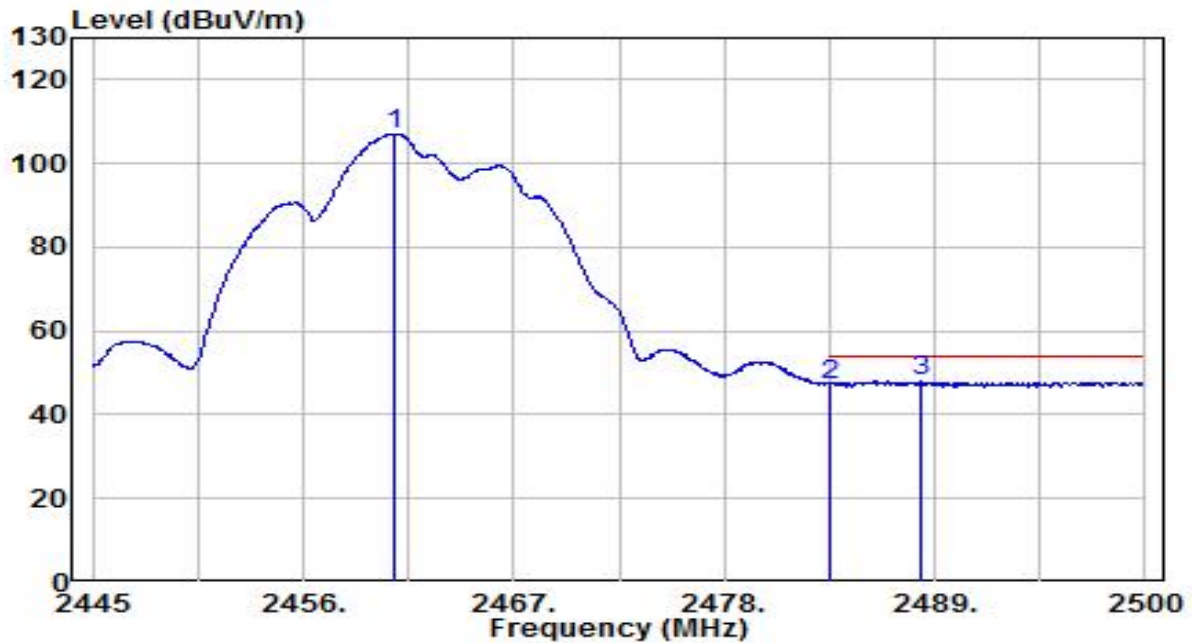


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.785	74.90	32.21	107.12	N/A	N/A	135	320	Average
2	2483.500	14.98	32.30	47.28	-6.72	54.00	135	320	Average
3	* 2488.285	15.64	32.32	47.96	-6.04	54.00	135	320	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

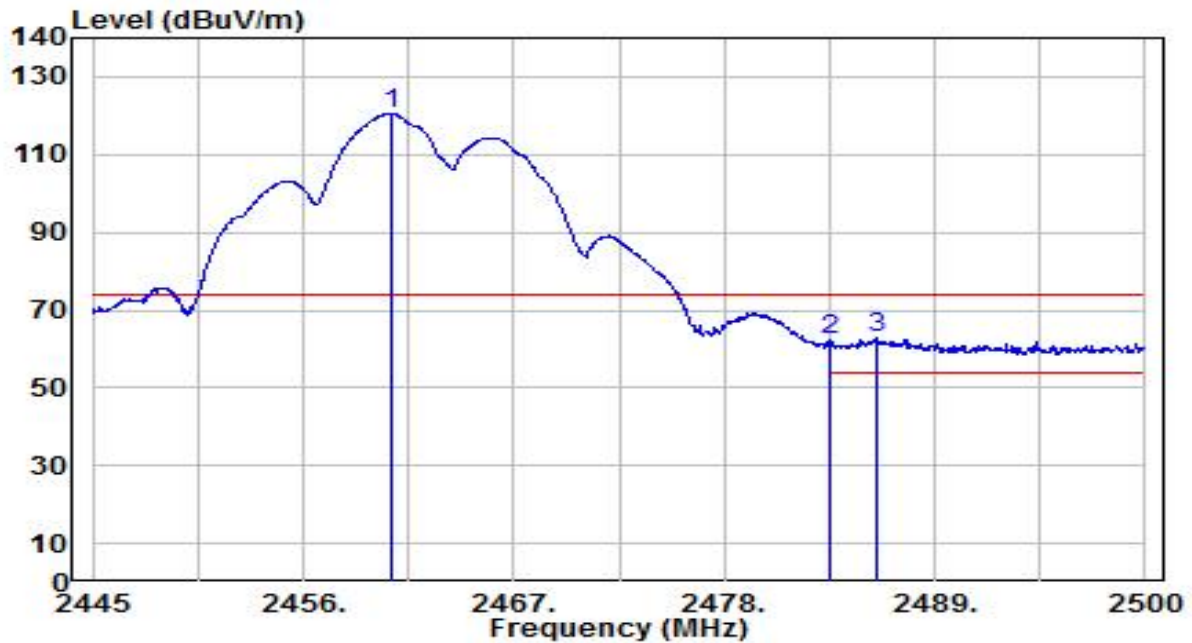


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.565	88.16	32.21	120.38	N/A	N/A	100	155	Peak
2	2483.500	29.86	32.30	62.16	-11.84	74.00	100	155	Peak
3	* 2485.920	30.49	32.31	62.80	-11.20	74.00	100	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

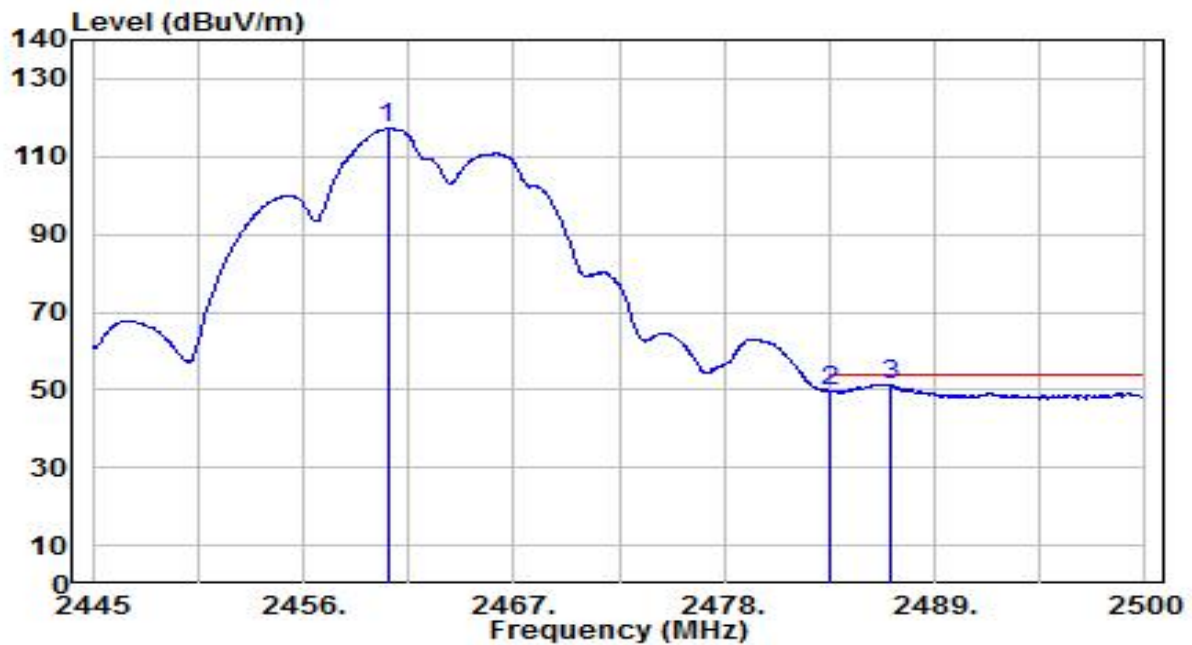


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.400	84.91	32.21	117.12	N/A	N/A	100	155	Average
2	2483.500	17.30	32.30	49.60	-4.40	54.00	100	155	Average
3	* 2486.635	19.18	32.31	51.49	-2.51	54.00	100	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

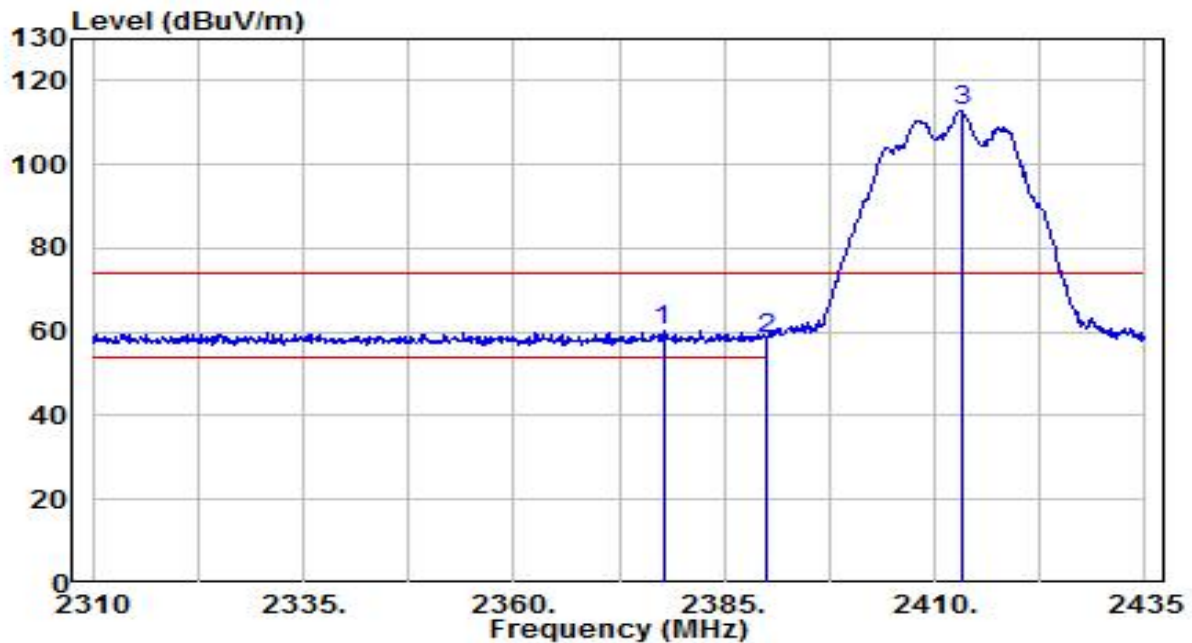


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2377.750	28.49	31.90	60.39	-13.61	74.00	170	40	Peak
2		2390.000	26.25	31.95	58.20	-15.80	74.00	170	40	Peak
3		2413.125	80.74	32.04	112.78	N/A	N/A	170	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

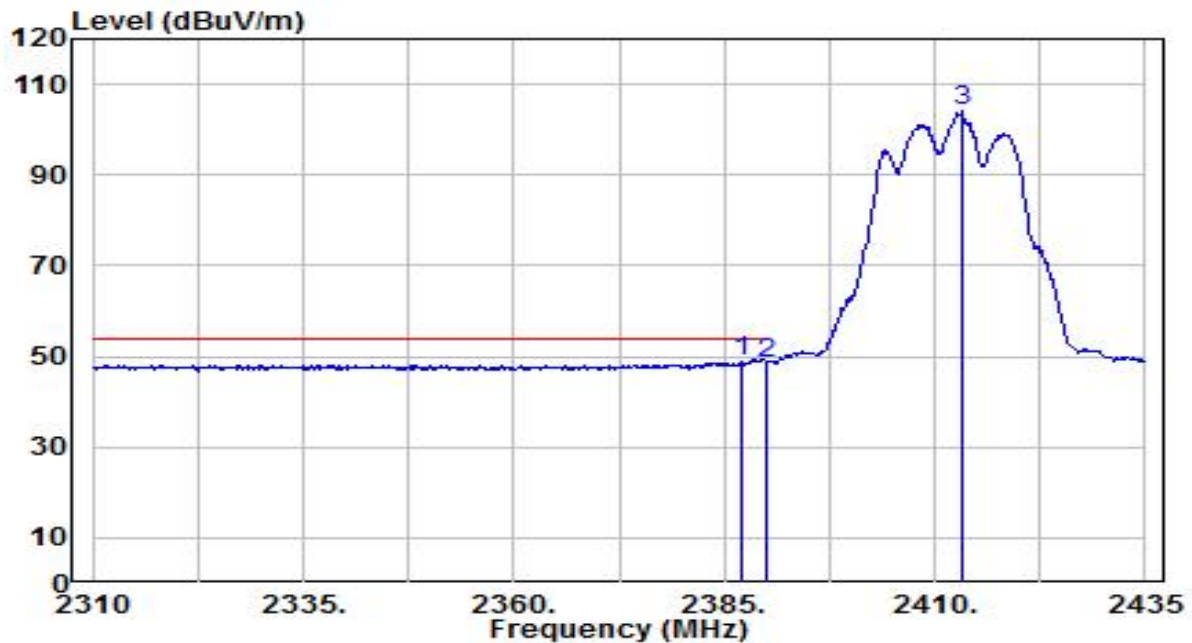


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.125	16.77	31.94	48.71	-5.29	54.00	170	40	Average
2		2390.000	16.67	31.95	48.62	-5.38	54.00	170	40	Average
3		2413.250	71.93	32.04	103.97	N/A	N/A	170	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

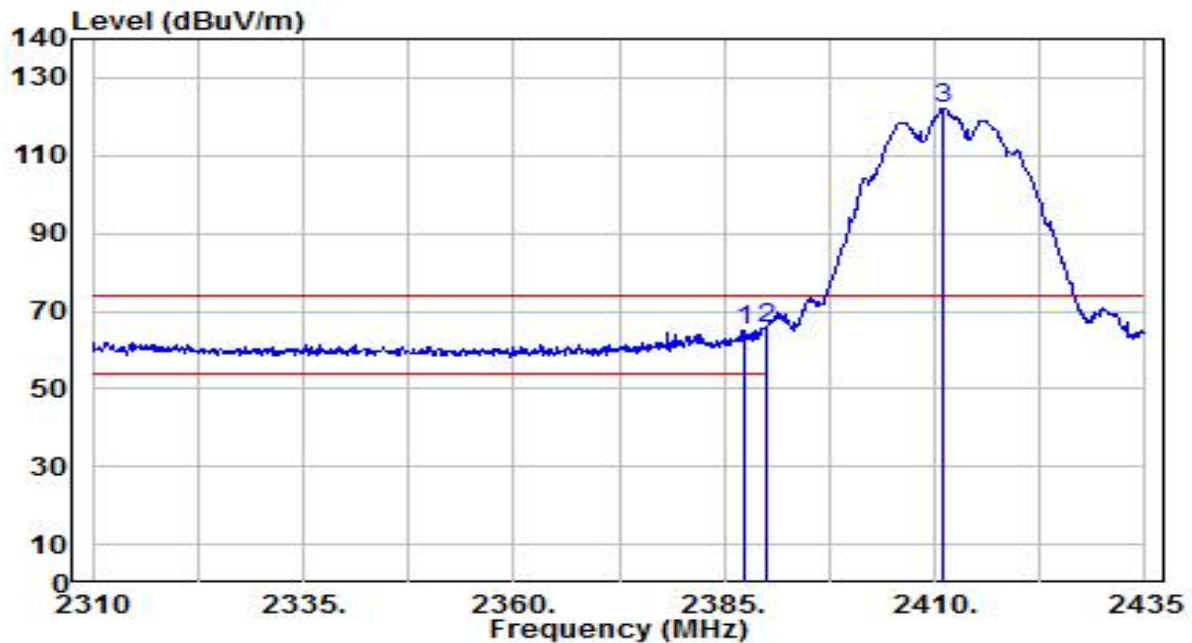


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.500	32.89	31.94	64.83	-9.17	74.00	100	160	Peak
2	*	2390.000	33.79	31.95	65.74	-8.26	74.00	100	160	Peak
3		2411.125	90.05	32.03	122.08	N/A	N/A	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

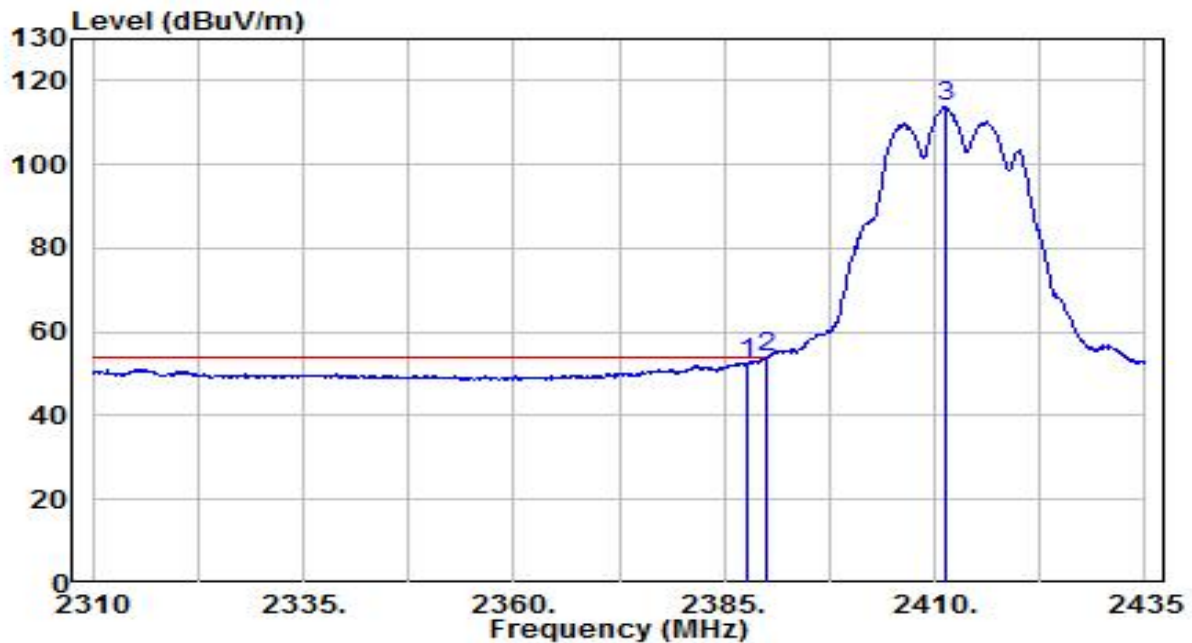


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.625	20.74	31.94	52.68	-1.32	54.00	100	160	Average
2	*	2390.000	21.82	31.95	53.77	-0.23	54.00	100	160	Average
3		2411.250	81.63	32.03	113.66	N/A	N/A	100	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

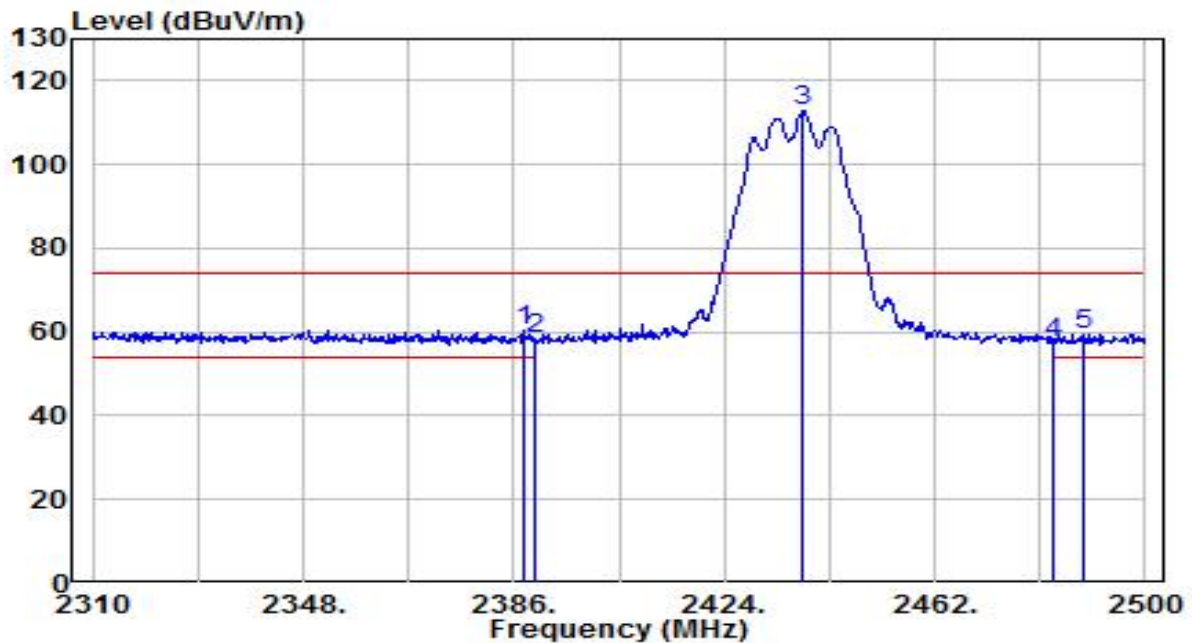


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.710	28.47	31.94	60.41	-13.59	74.00	160	315	Peak
2		2390.000	26.67	31.95	58.62	-15.38	74.00	160	315	Peak
3		2438.250	80.59	32.13	112.72	N/A	N/A	160	315	Peak
4		2483.500	25.02	32.30	57.32	-16.68	74.00	160	315	Peak
5		2488.980	27.25	32.32	59.57	-14.43	74.00	160	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

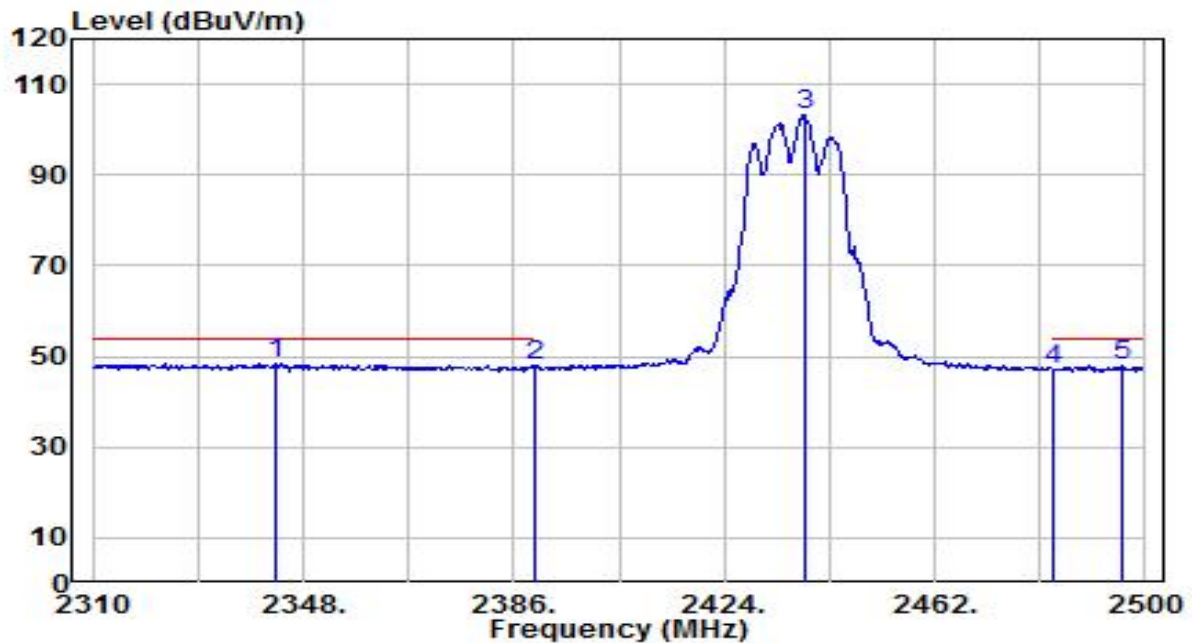


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2343.060	16.56	31.77	48.34	-5.66	54.00	160	315	Average
2		2390.000	15.93	31.95	47.88	-6.12	54.00	160	315	Average
3		2438.440	70.99	32.13	103.11	N/A	N/A	160	315	Average
4		2483.500	15.01	32.30	47.31	-6.69	54.00	160	315	Average
5		2495.630	15.71	32.34	48.05	-5.95	54.00	160	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

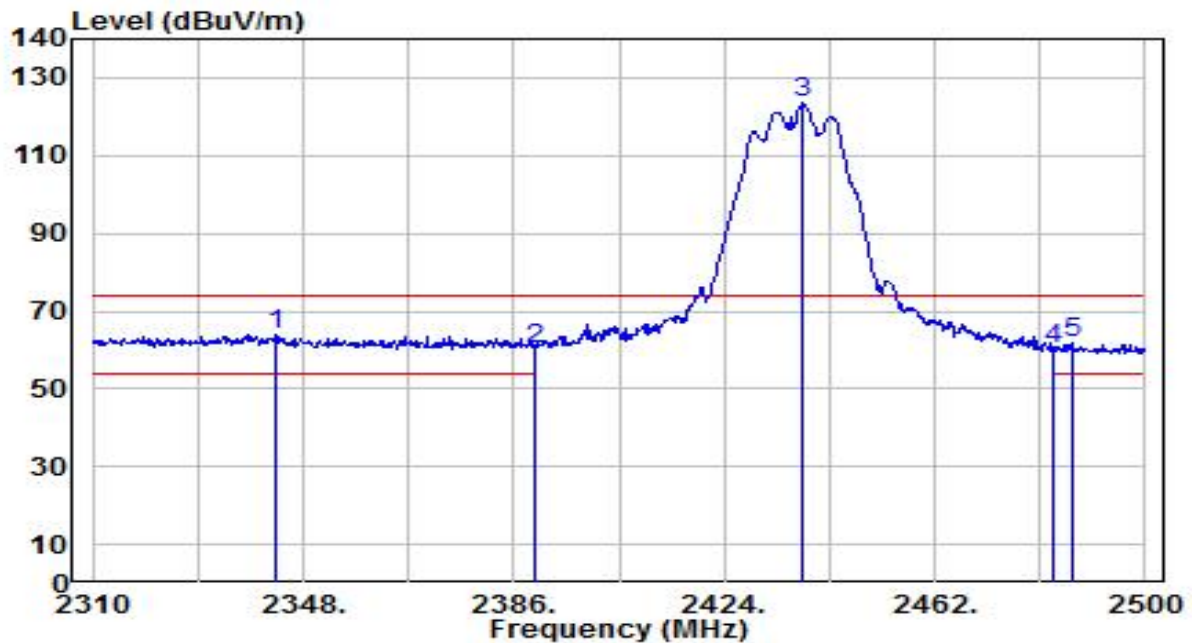


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2343.060	32.09	31.77	63.86	-10.14	74.00	130	155	Peak
2		2390.000	28.36	31.95	60.31	-13.69	74.00	130	155	Peak
3		2438.250	91.27	32.13	123.40	N/A	N/A	130	155	Peak
4		2483.500	27.78	32.30	60.08	-13.92	74.00	130	155	Peak
5		2487.080	29.50	32.31	61.81	-12.19	74.00	130	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

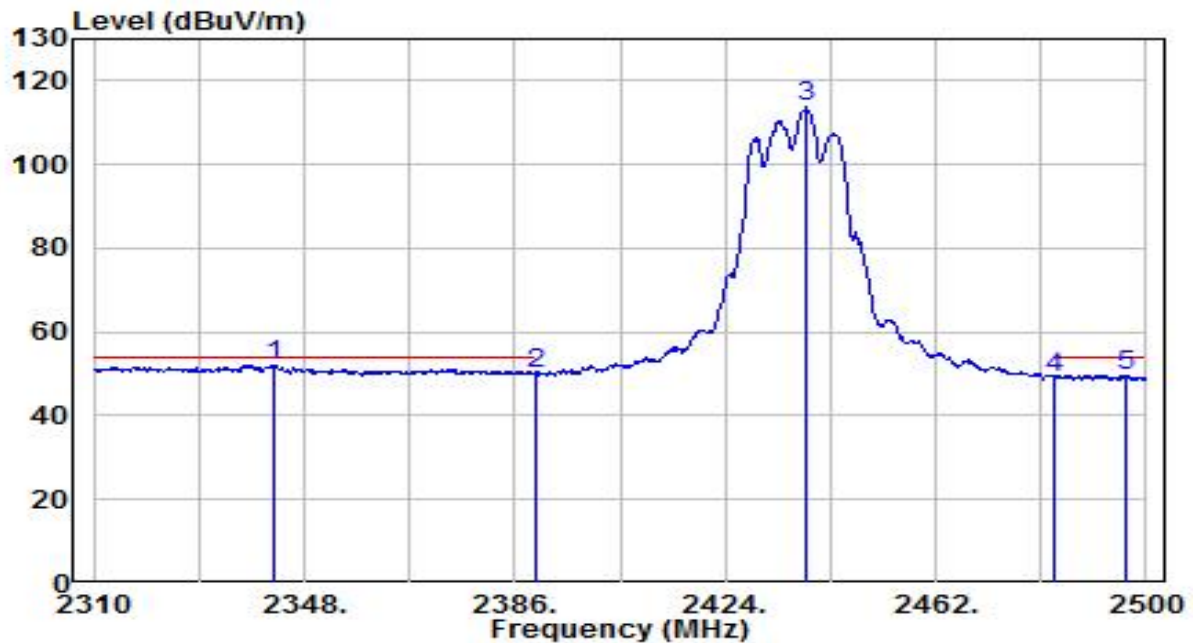


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.680	20.44	31.77	52.21	-1.79	54.00	130	155	Average
2		2390.000	17.94	31.95	49.88	-4.12	54.00	130	155	Average
3		2438.820	81.47	32.13	113.60	N/A	N/A	130	155	Average
4		2483.500	16.85	32.30	49.15	-4.85	54.00	130	155	Average
5		2496.390	17.43	32.35	49.77	-4.23	54.00	130	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

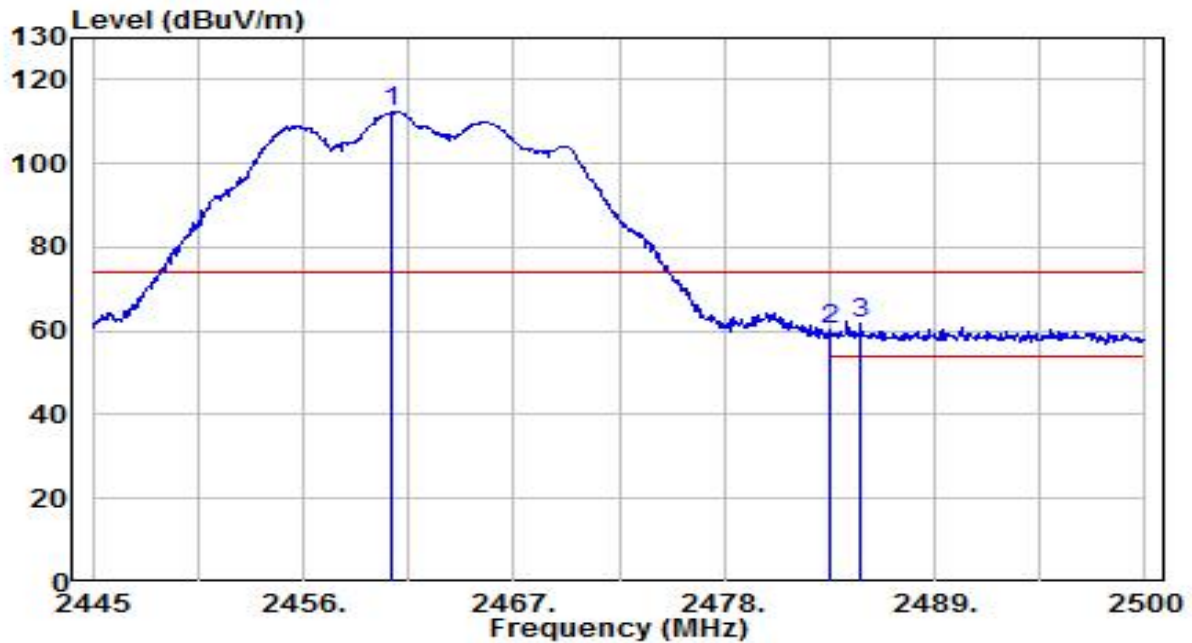


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.620	80.27	32.21	112.48	N/A	N/A	145	45	Peak
2	2483.500	27.88	32.30	60.17	-13.83	74.00	145	45	Peak
3	* 2485.095	29.37	32.30	61.68	-12.32	74.00	145	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

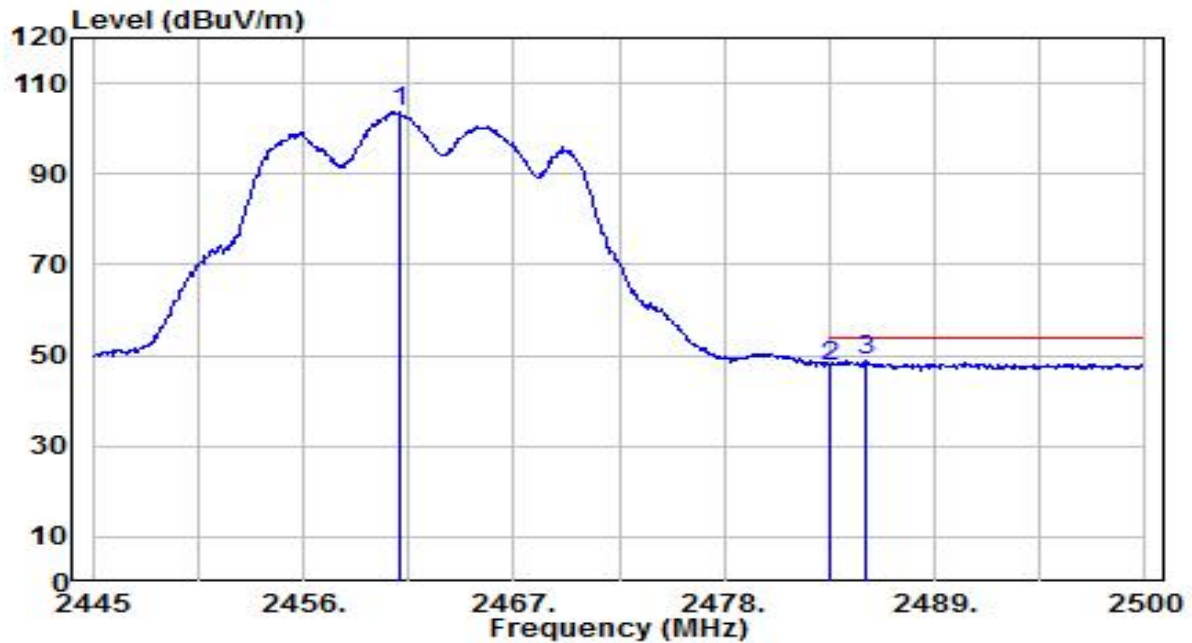


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.005	71.34	32.21	103.56	N/A	N/A	145	45	Average
2	2483.500	15.37	32.30	47.67	-6.33	54.00	145	45	Average
3	* 2485.370	16.38	32.31	48.68	-5.32	54.00	145	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

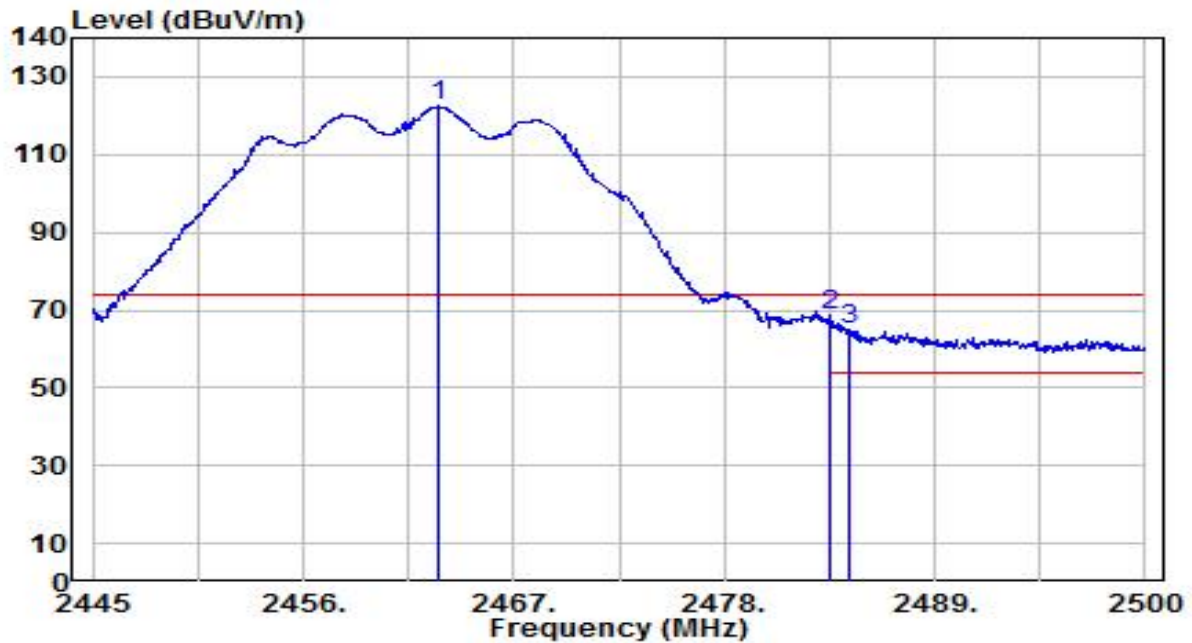


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.095	90.11	32.22	122.33	N/A	N/A	100	155	Peak
2	* 2483.500	36.56	32.30	68.86	-5.14	74.00	100	155	Peak
3	2484.600	32.44	32.30	64.75	-9.25	74.00	100	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

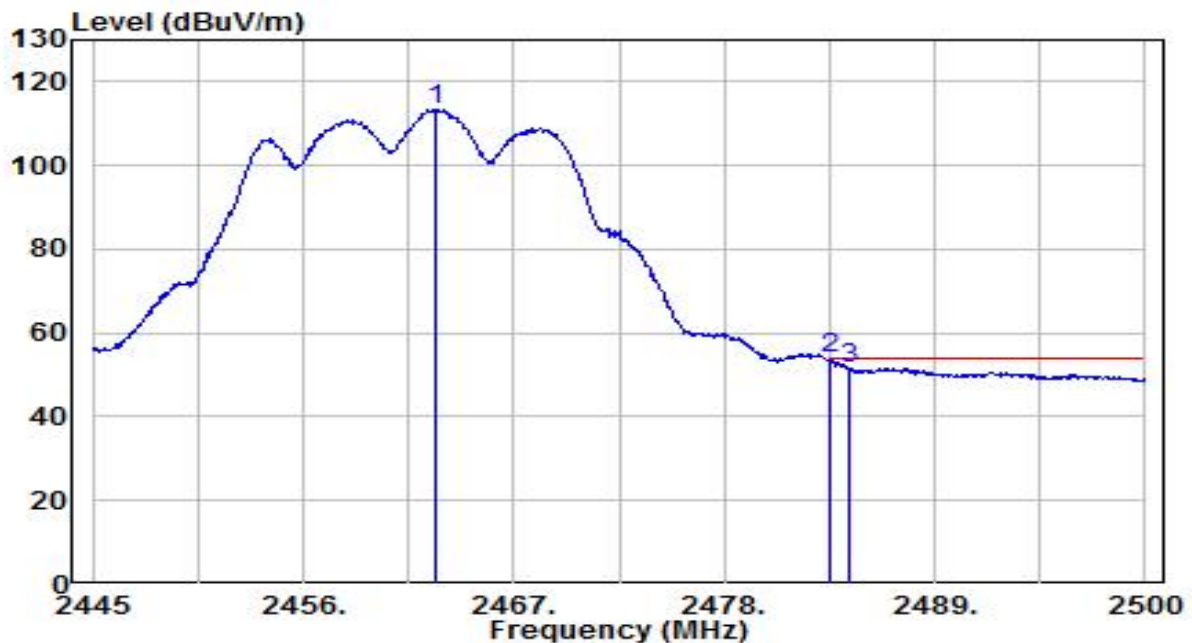


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.985	81.27	32.22	113.49	N/A	N/A	100	155	Average
2	* 2483.500	21.42	32.30	53.72	-0.28	54.00	100	155	Average
3	2484.545	19.31	32.30	51.62	-2.38	54.00	100	155	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

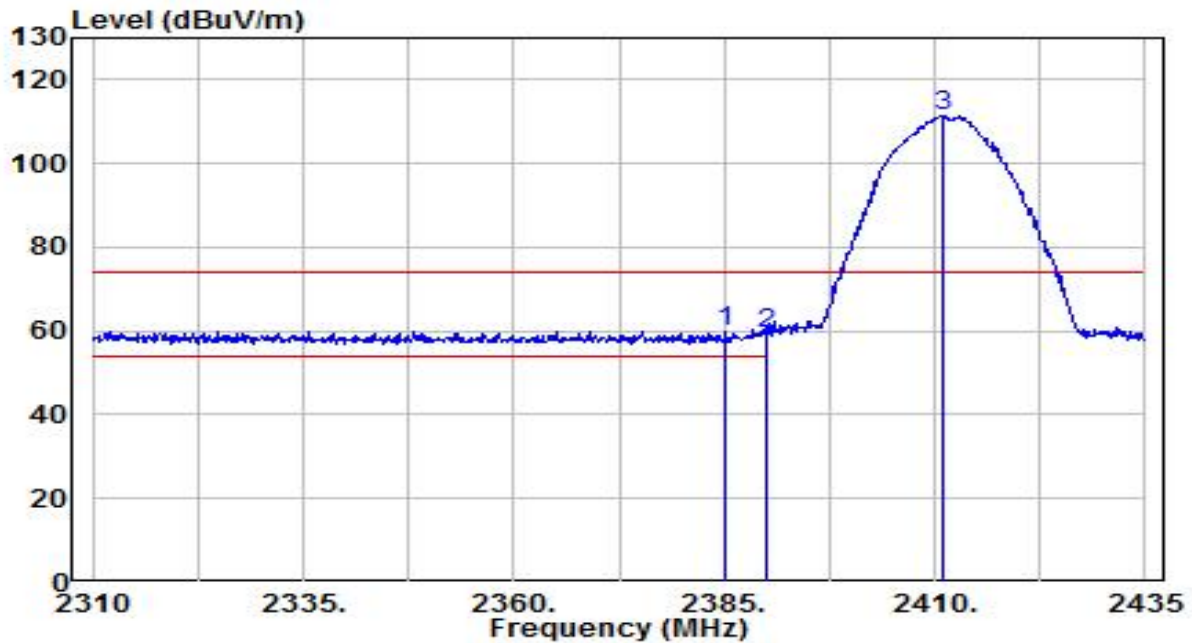


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.125	28.04	31.93	59.97	-14.03	74.00	150	230	Peak
2		2390.000	27.61	31.95	59.56	-14.44	74.00	150	230	Peak
3		2410.875	79.48	32.03	111.51	N/A	N/A	150	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

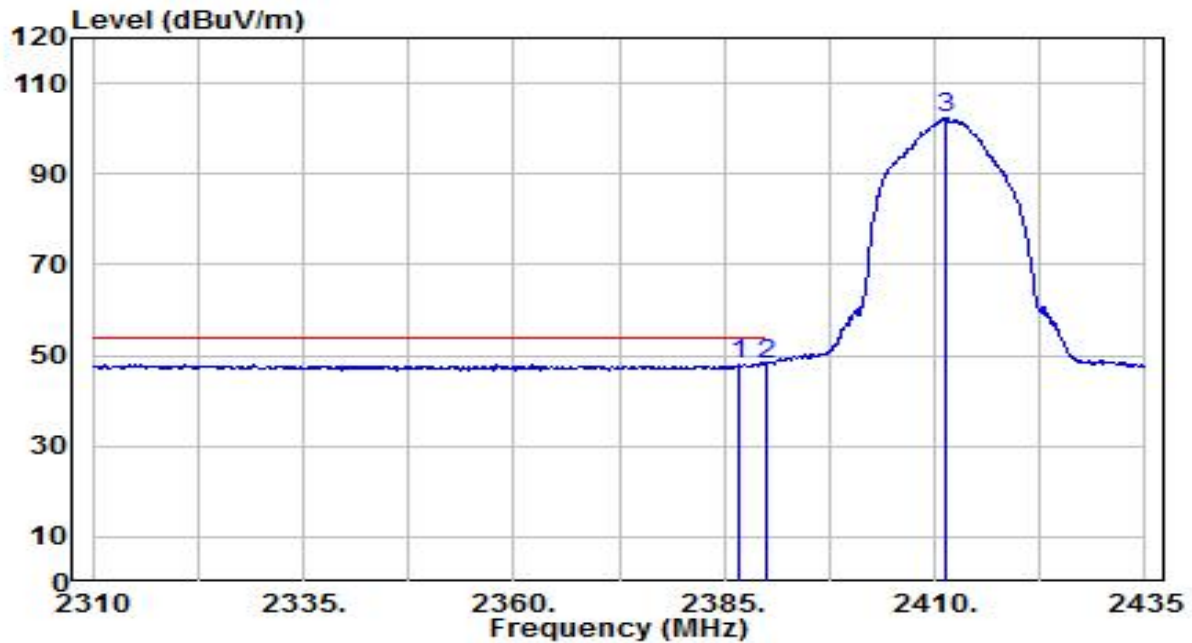


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.875	16.05	31.94	47.99	-6.01	54.00	150	230	Average
2	*	2390.000	16.23	31.95	48.17	-5.83	54.00	150	230	Average
3		2411.250	70.40	32.03	102.43	N/A	N/A	150	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

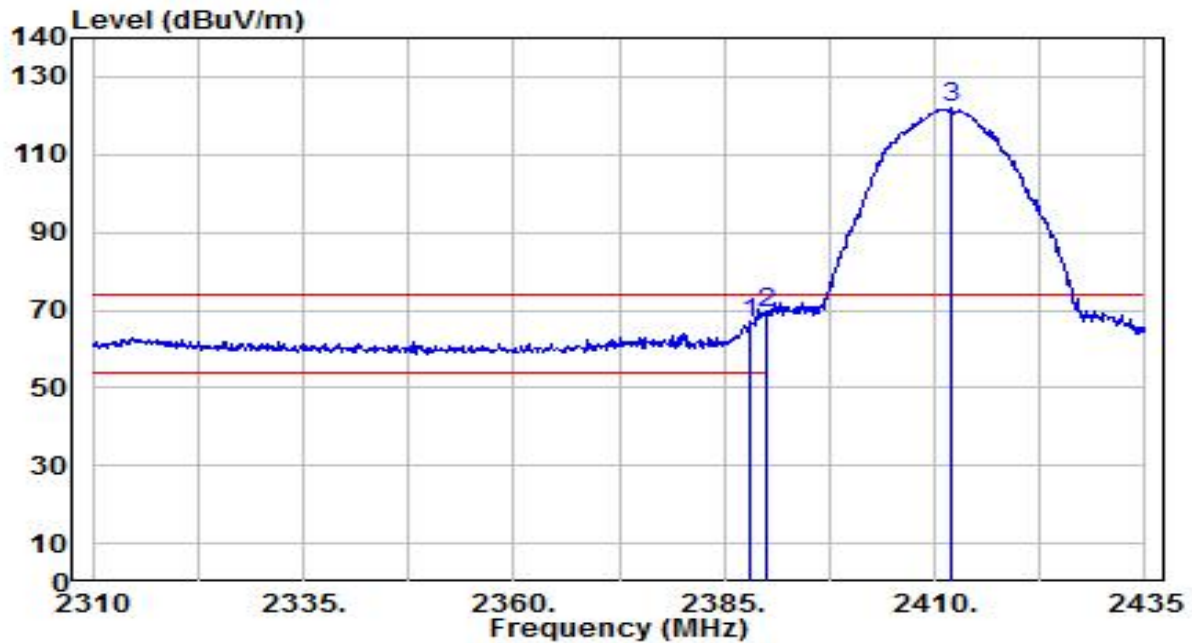


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	34.70	31.94	66.64	-7.36	74.00	125	165	Peak
2	* 2390.000	37.31	31.95	69.26	-4.74	74.00	125	165	Peak
3	2411.875	89.76	32.03	121.79	N/A	N/A	125	165	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

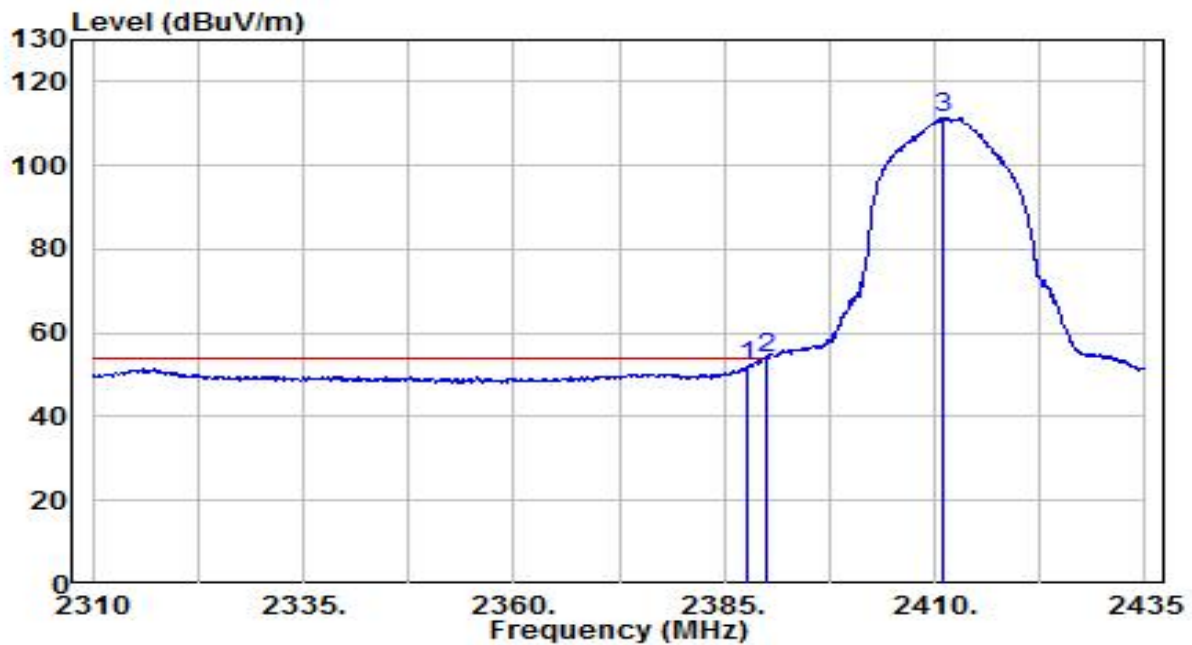


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.875	20.30	31.94	52.24	-1.76	54.00	125	165	Average
2	*	2390.000	21.80	31.95	53.75	-0.25	54.00	125	165	Average
3		2410.875	79.47	32.03	111.49	N/A	N/A	125	165	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

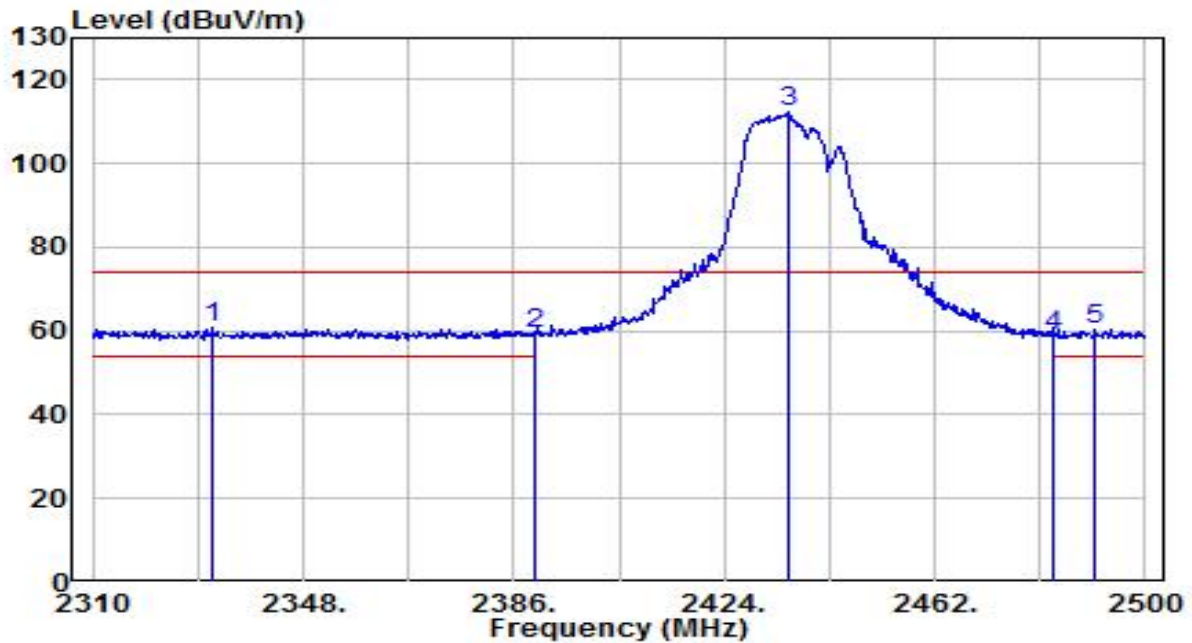


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2331.660	28.92	31.73	60.65	-13.35	74.00	160	40	Peak
2		2390.000	27.17	31.95	59.12	-14.88	74.00	160	40	Peak
3		2435.400	80.15	32.12	112.27	N/A	N/A	160	40	Peak
4		2483.500	26.43	32.30	58.73	-15.27	74.00	160	40	Peak
5		2490.880	28.03	32.33	60.35	-13.65	74.00	160	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

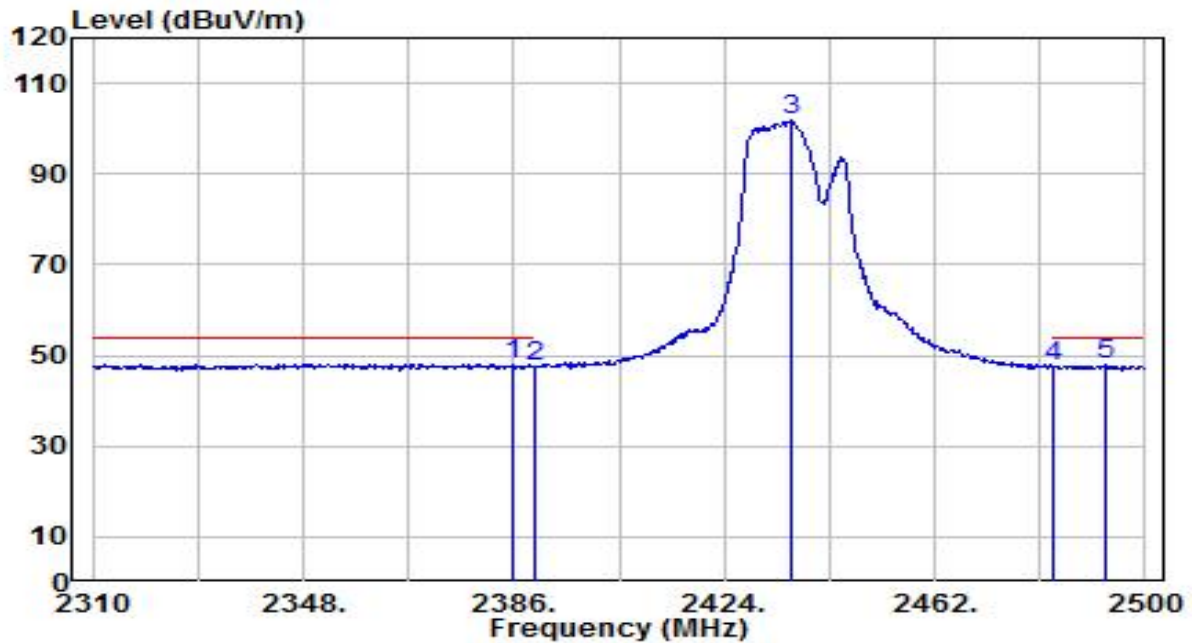


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.000	16.14	31.93	48.07	-5.93	54.00	160	40	Average
2		2390.000	15.56	31.95	47.50	-6.50	54.00	160	40	Average
3		2436.350	69.75	32.12	101.88	N/A	N/A	160	40	Average
4		2483.500	15.17	32.30	47.46	-6.54	54.00	160	40	Average
5		2492.970	15.48	32.33	47.81	-6.19	54.00	160	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

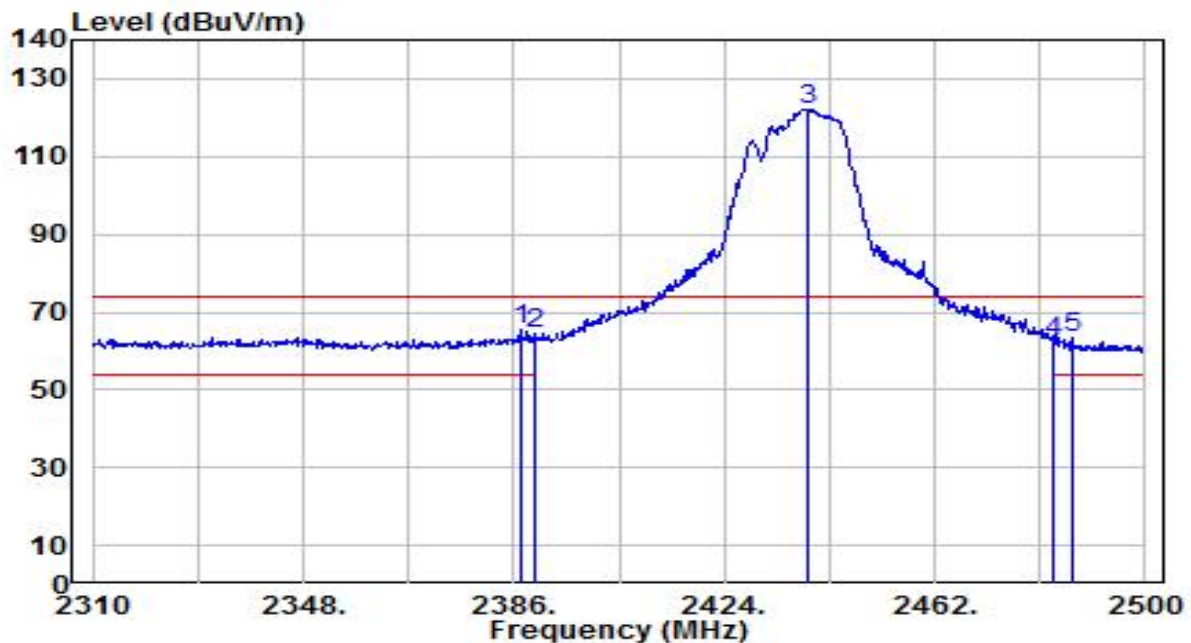


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	33.54	31.94	65.47	-8.53	74.00	100	155	Peak
2		2390.000	32.30	31.95	64.25	-9.75	74.00	100	155	Peak
3		2439.200	90.14	32.13	122.27	N/A	N/A	100	155	Peak
4		2483.500	30.25	32.30	62.55	-11.45	74.00	100	155	Peak
5		2486.700	30.91	32.31	63.22	-10.78	74.00	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

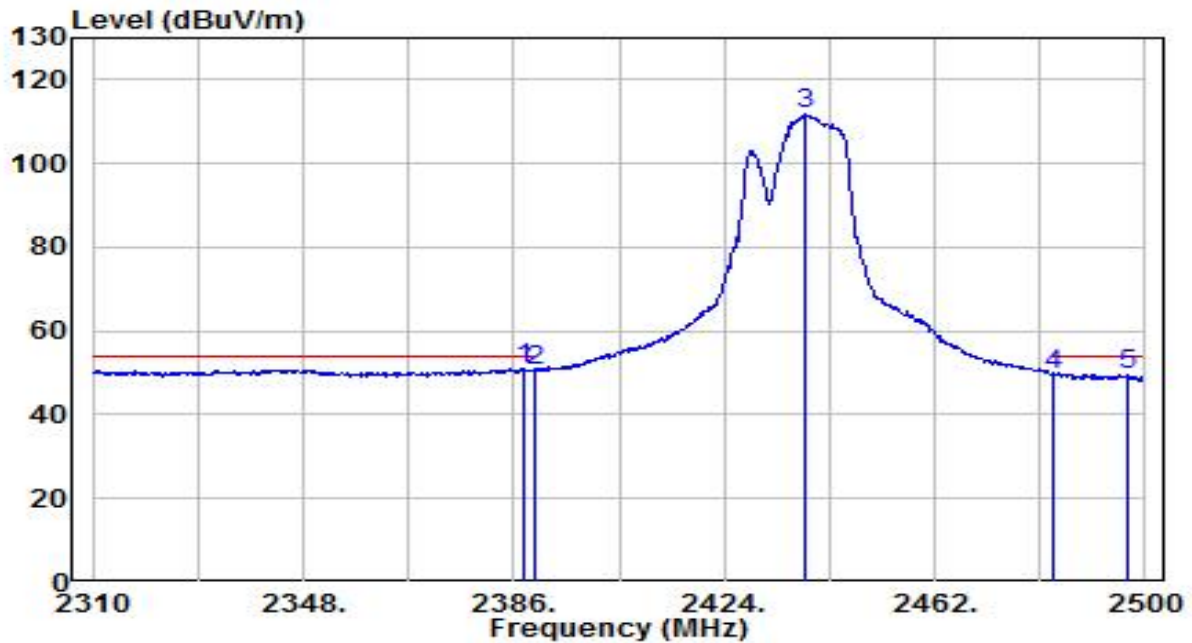


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.900	19.09	31.94	51.03	-2.97	54.00	100	155	Average
2		2390.000	18.79	31.95	50.74	-3.26	54.00	100	155	Average
3		2438.440	79.75	32.13	111.88	N/A	N/A	100	155	Average
4		2483.500	17.12	32.30	49.42	-4.58	54.00	100	155	Average
5		2496.770	17.31	32.35	49.66	-4.34	54.00	100	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

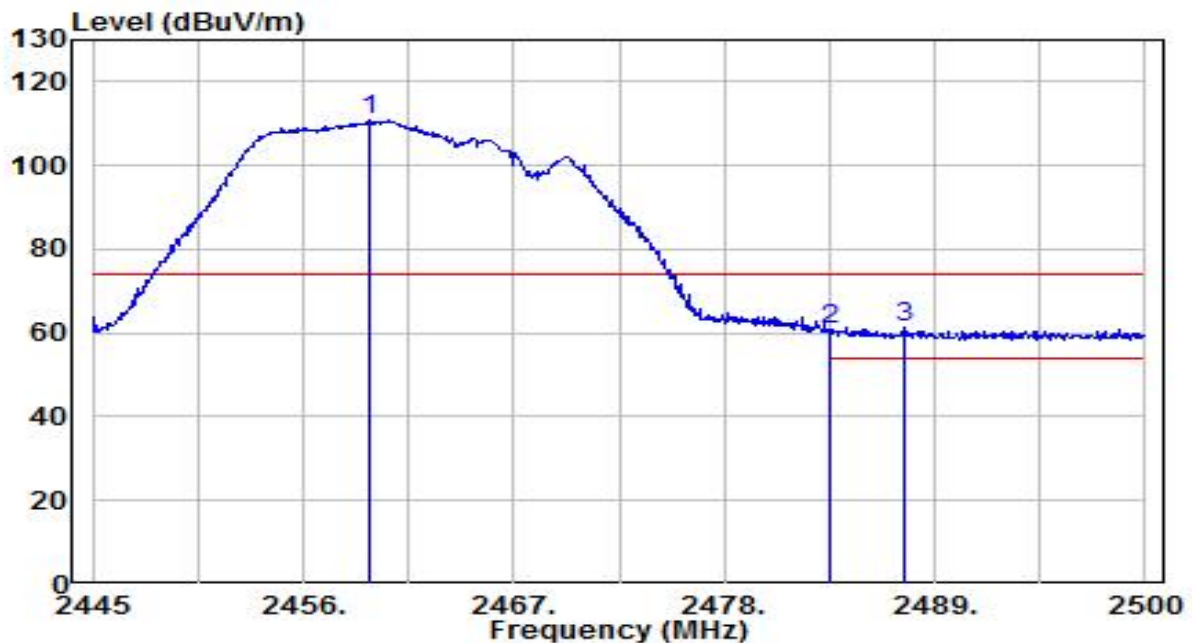


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.465	78.47	32.21	110.68	N/A	N/A	145	45	Peak
2	2483.500	28.35	32.30	60.65	-13.35	74.00	145	45	Peak
3	* 2487.350	29.18	32.31	61.49	-12.51	74.00	145	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

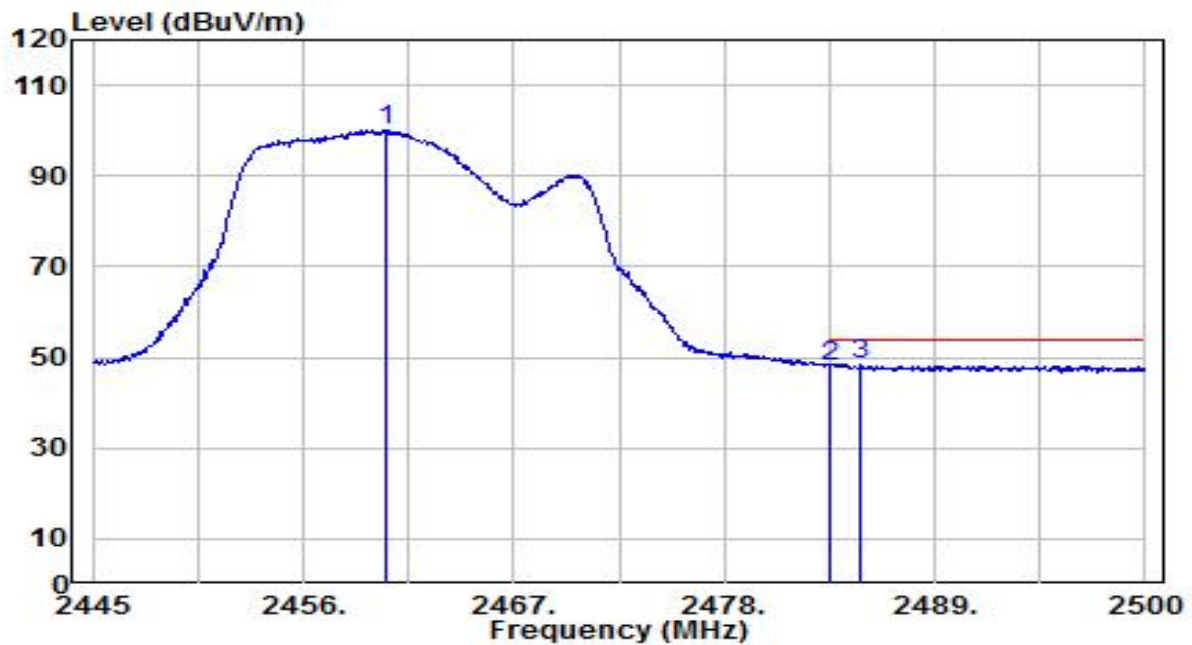


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.345	67.95	32.21	100.16	N/A	N/A	145	45	Average
2	2483.500	15.83	32.30	48.12	-5.88	54.00	145	45	Average
3	* 2485.150	15.93	32.30	48.23	-5.77	54.00	145	45	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

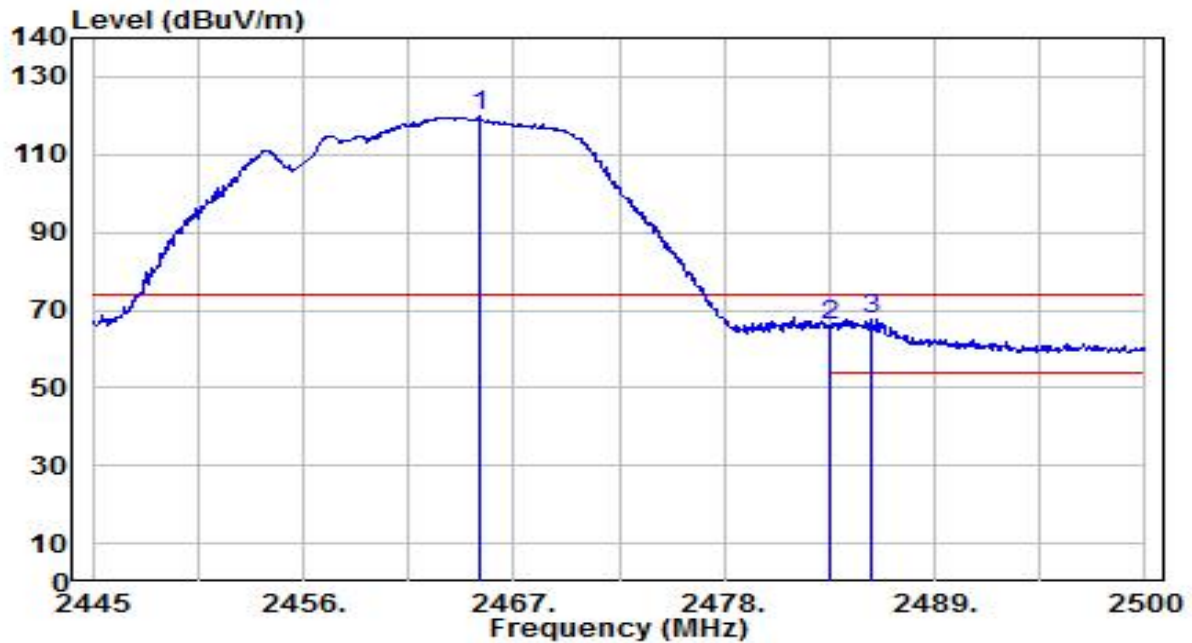


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.185	87.57	32.23	119.80	N/A	N/A	145	155	Peak
2	2483.500	33.50	32.30	65.80	-8.20	74.00	145	155	Peak
3	* 2485.755	35.21	32.31	67.51	-6.49	74.00	145	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

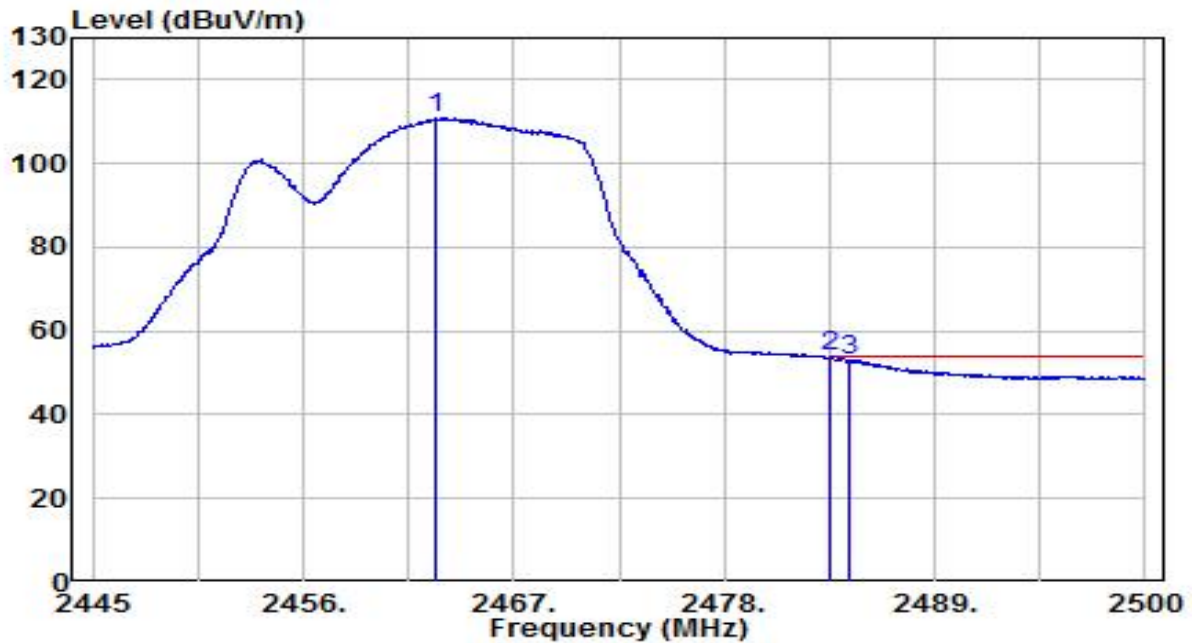


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.875	78.74	32.22	110.96	N/A	N/A	145	155	Average
2	*	2483.500	21.47	32.30	53.77	-0.23	54.00	145	155	Average
3		2484.600	20.62	32.30	52.93	-1.07	54.00	145	155	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

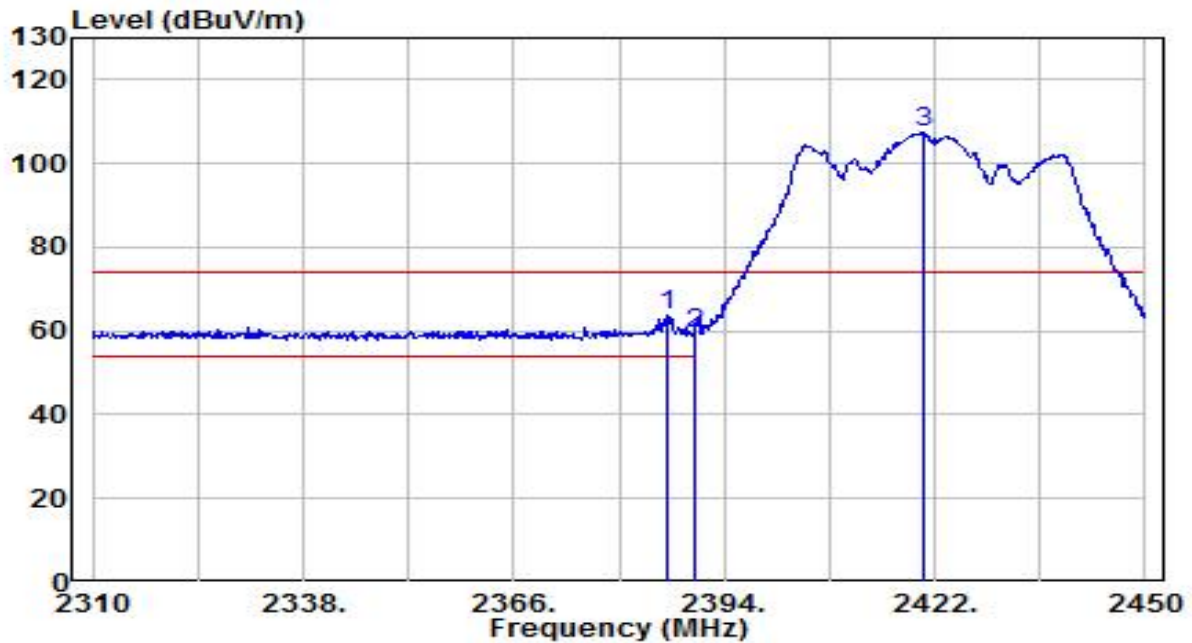

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.440	31.82	31.94	63.76	-10.24	74.00	150	230	Peak
2		2390.000	27.37	31.95	59.32	-14.68	74.00	150	230	Peak
3		2420.460	75.28	32.06	107.34	N/A	N/A	150	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.