


EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

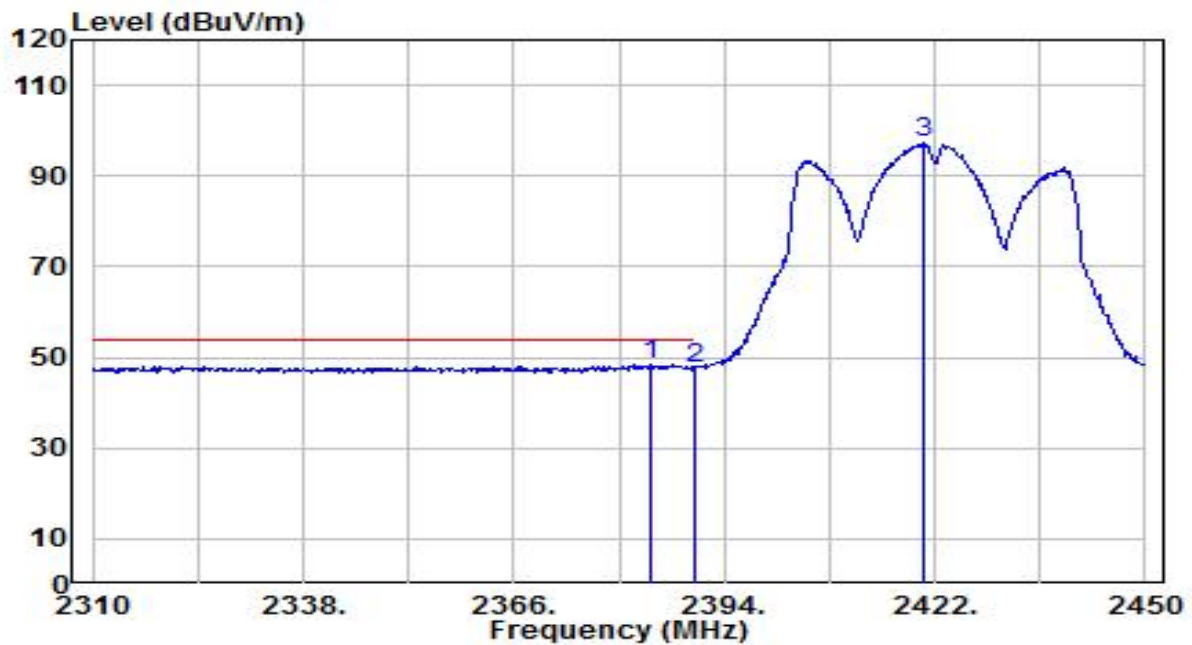


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.200	16.50	31.93	48.43	-5.57	54.00	150	230	Average
2		2390.000	15.80	31.95	47.75	-6.25	54.00	150	230	Average
3		2420.600	65.11	32.06	97.17	N/A	N/A	150	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

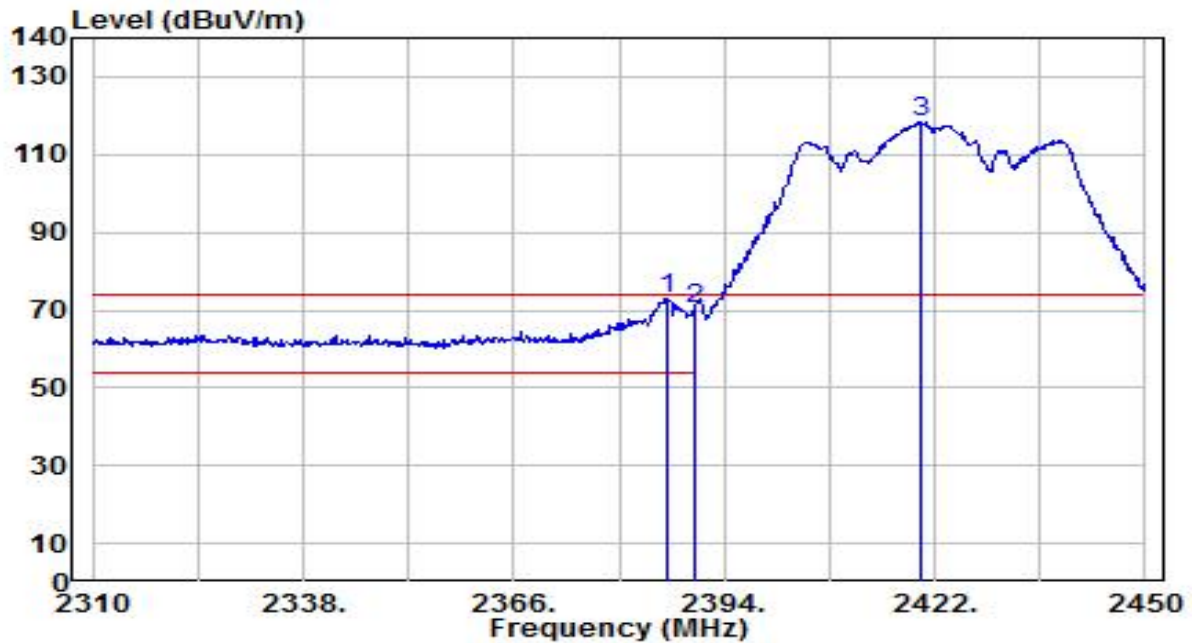


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.580	40.98	31.94	72.91	-1.09	74.00	125	165	Peak
2		2390.000	38.45	31.95	70.40	-3.60	74.00	125	165	Peak
3		2420.180	86.18	32.06	118.24	N/A	N/A	125	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

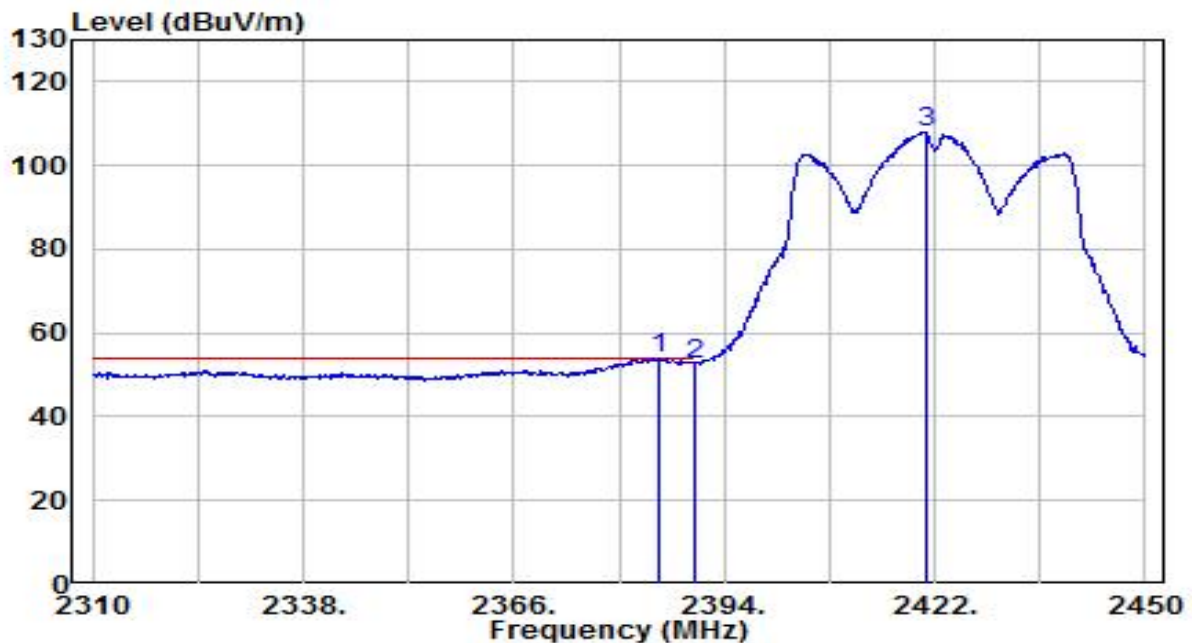


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.460	21.94	31.93	53.87	-0.13	54.00	125	165	Average
2		2390.000	20.68	31.95	52.63	-1.37	54.00	125	165	Average
3		2421.020	75.91	32.06	107.98	N/A	N/A	125	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

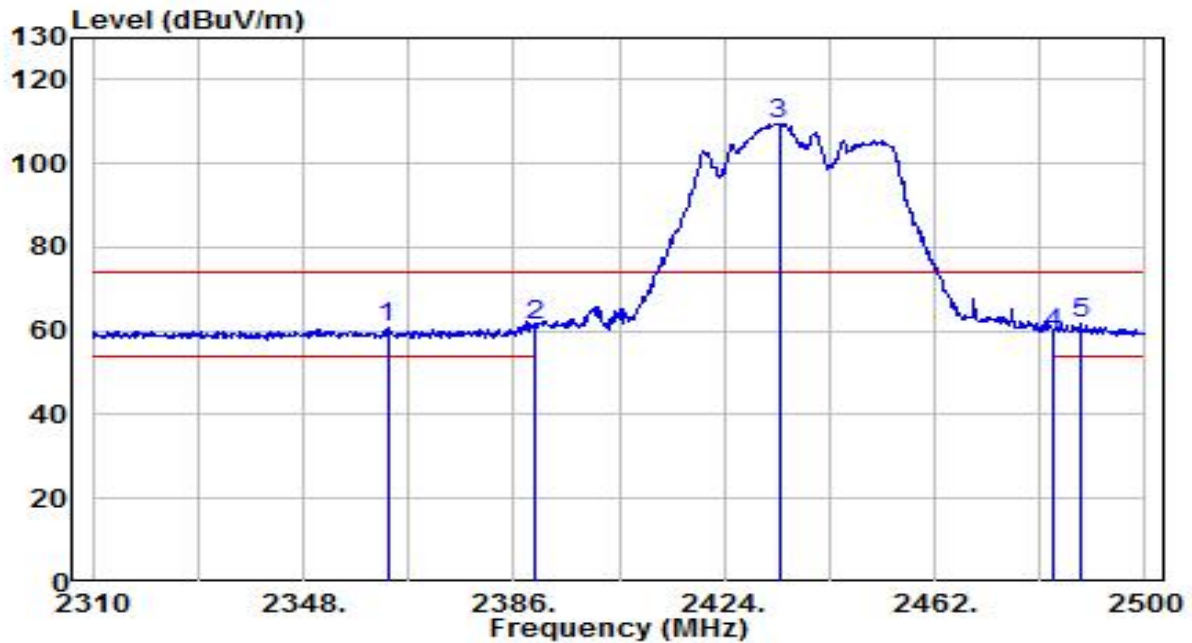


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2363.200	29.19	31.85	61.04	-12.96	74.00	135	50	Peak
2	2390.000	29.32	31.95	61.27	-12.73	74.00	135	50	Peak
3	2433.880	77.40	32.11	109.51	N/A	N/A	135	50	Peak
4	2483.500	27.24	32.30	59.54	-14.46	74.00	135	50	Peak
5	* 2488.410	29.27	32.32	61.59	-12.41	74.00	135	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

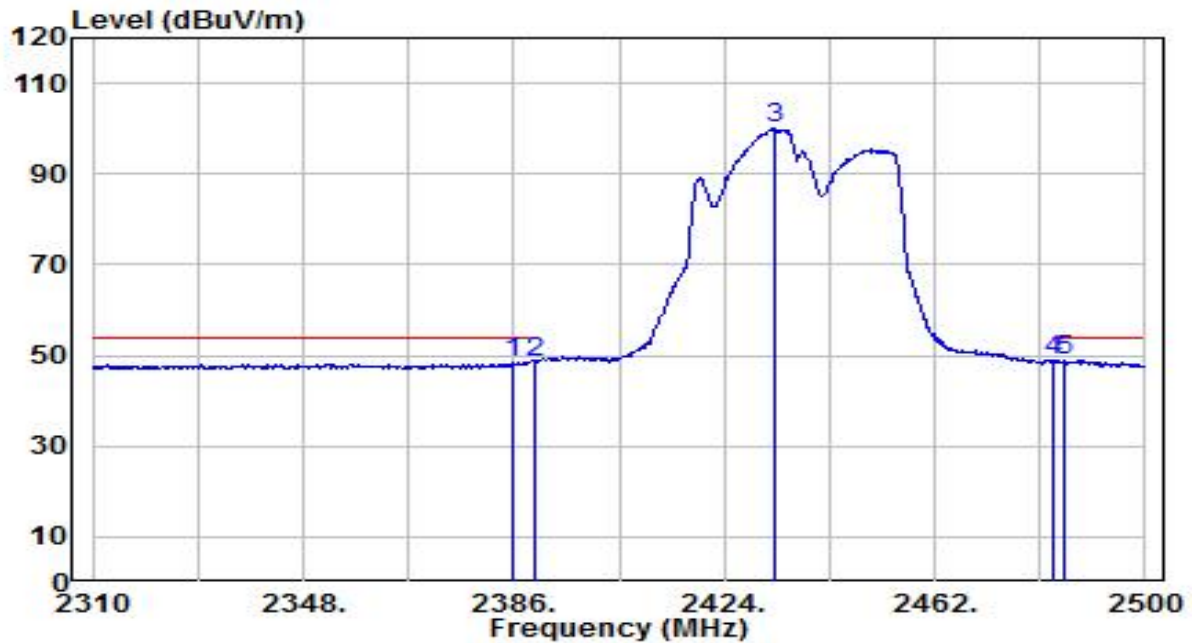


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	16.44	31.93	48.37	-5.63	54.00	135	50	Average
2	2390.000	16.62	31.95	48.57	-5.43	54.00	135	50	Average
3	2432.930	67.82	32.11	99.93	N/A	N/A	135	50	Average
4	* 2483.500	16.62	32.30	48.92	-5.08	54.00	135	50	Average
5	2485.560	16.59	32.31	48.89	-5.11	54.00	135	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

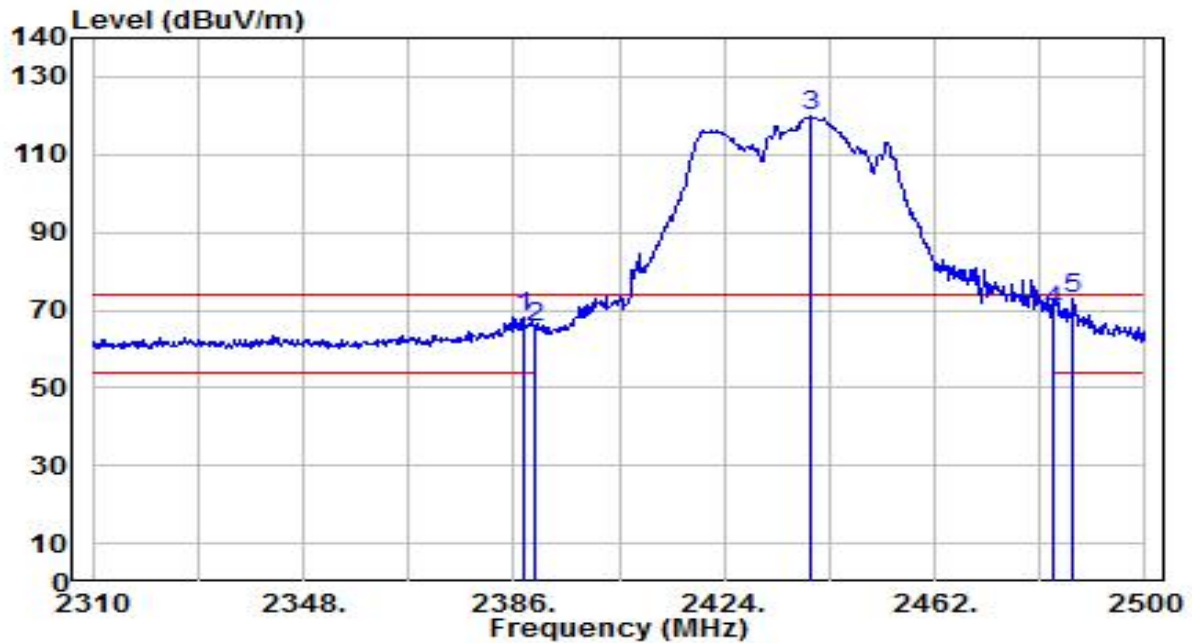


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	36.30	31.94	68.24	-5.76	74.00	125	150	Peak
2	2390.000	33.47	31.95	65.42	-8.58	74.00	125	150	Peak
3	2439.580	87.68	32.13	119.81	N/A	N/A	125	150	Peak
4	2483.500	37.39	32.30	69.69	-4.31	74.00	125	150	Peak
5	* 2487.080	40.80	32.31	73.11	-0.89	74.00	125	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

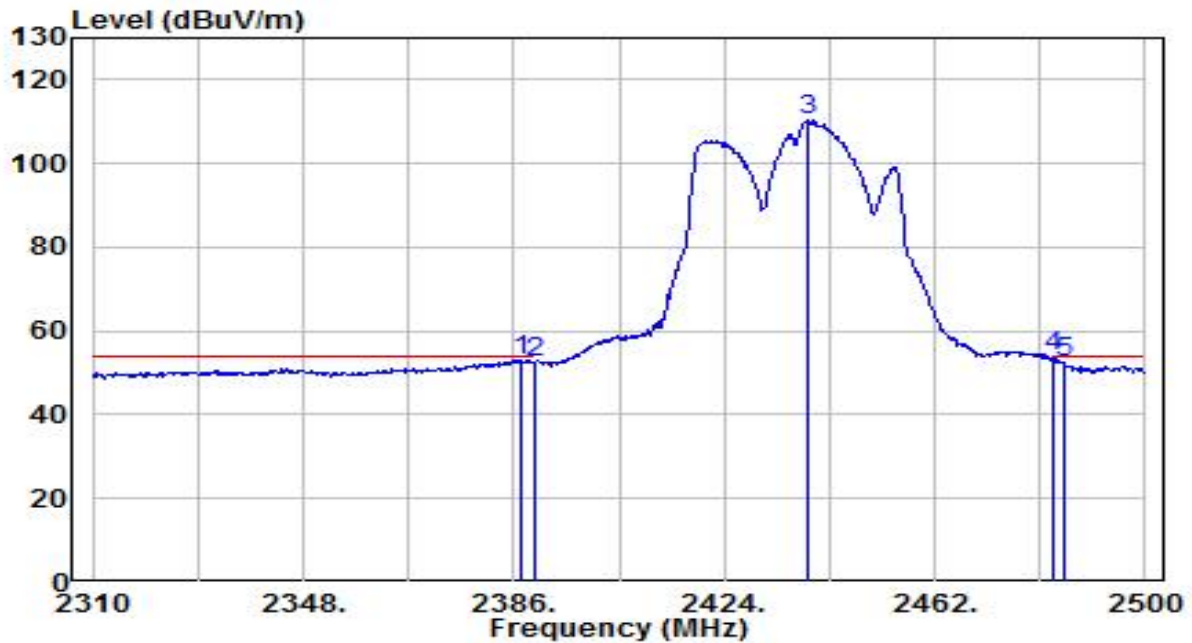


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	21.05	31.94	52.99	-1.01	54.00	125	150	Average
2	2390.000	20.69	31.95	52.64	-1.36	54.00	125	150	Average
3	2439.200	78.08	32.13	110.21	N/A	N/A	125	150	Average
4	* 2483.500	21.44	32.30	53.74	-0.26	54.00	125	150	Average
5	2485.370	19.99	32.31	52.29	-1.71	54.00	125	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

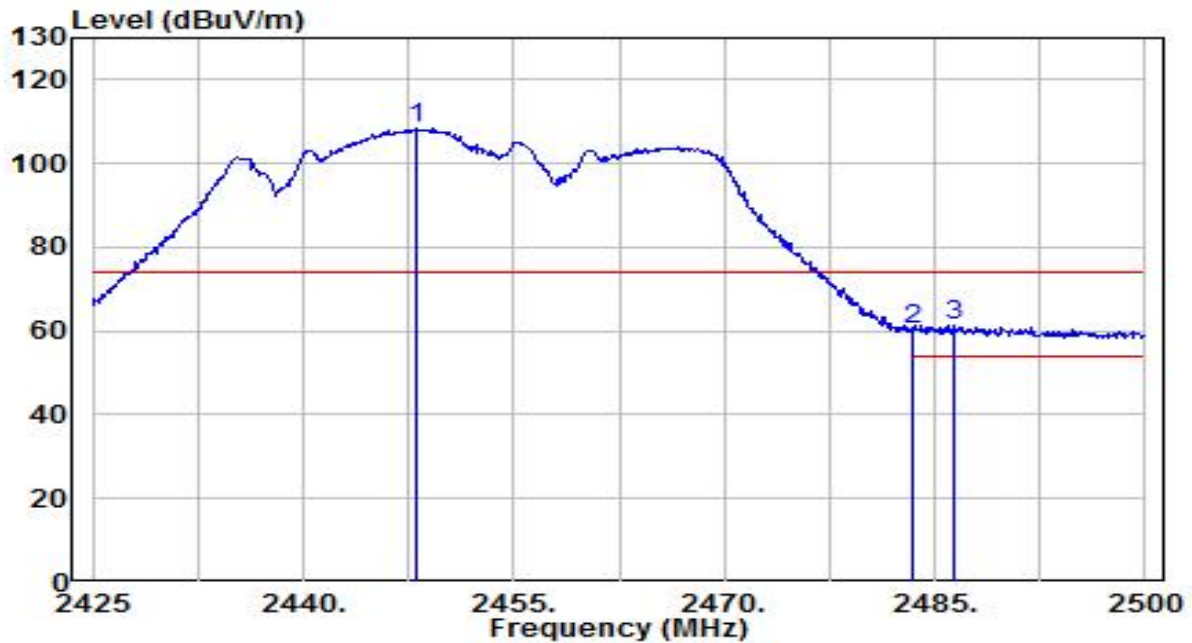


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.100	76.14	32.17	108.31	N/A	N/A	155	320	Peak
2	2483.500	28.01	32.30	60.31	-13.69	74.00	155	320	Peak
3	* 2486.350	28.92	32.31	61.23	-12.77	74.00	155	320	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

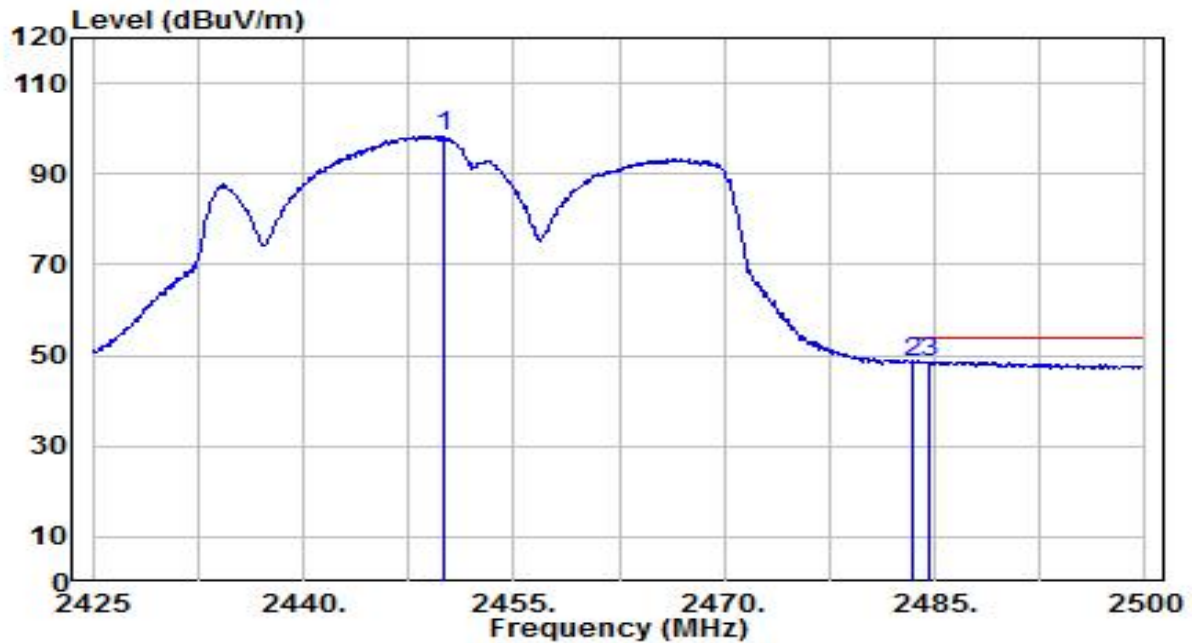


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.050	66.23	32.17	98.41	N/A	N/A	155	320	Average
2	2483.500	16.30	32.30	48.59	-5.41	54.00	155	320	Average
3	* 2484.550	16.35	32.30	48.65	-5.35	54.00	155	320	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

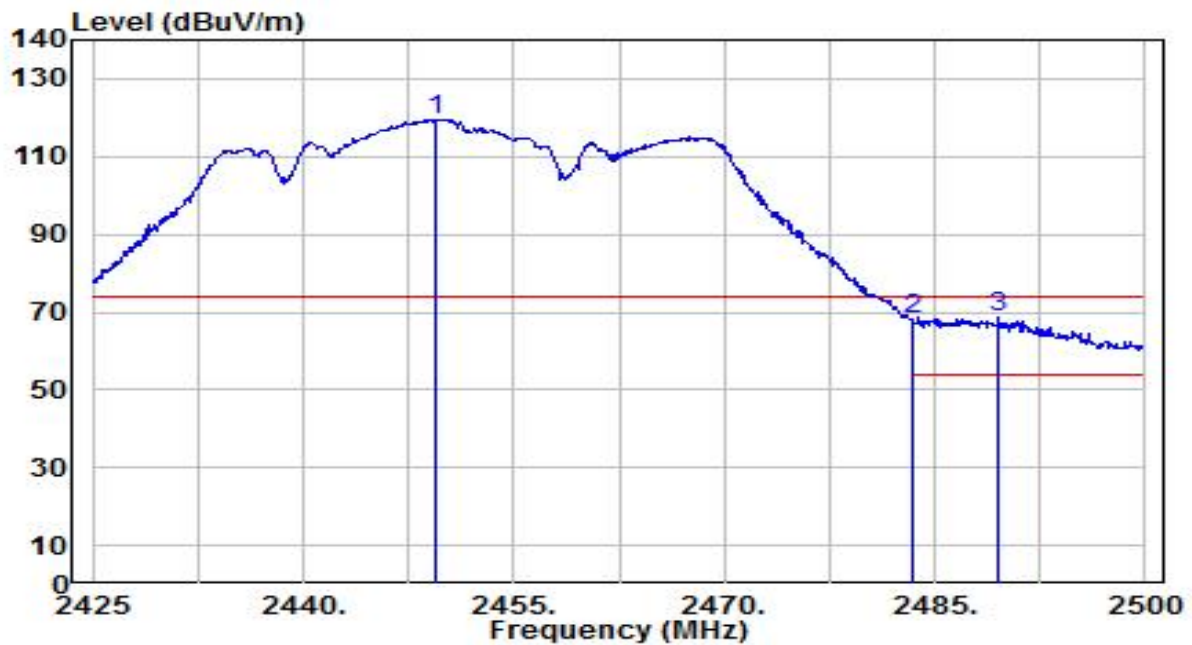


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.375	87.42	32.17	119.59	N/A	N/A	130	160	Peak
2	2483.500	35.93	32.30	68.23	-5.77	74.00	130	160	Peak
3	* 2489.575	36.57	32.32	68.89	-5.11	74.00	130	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

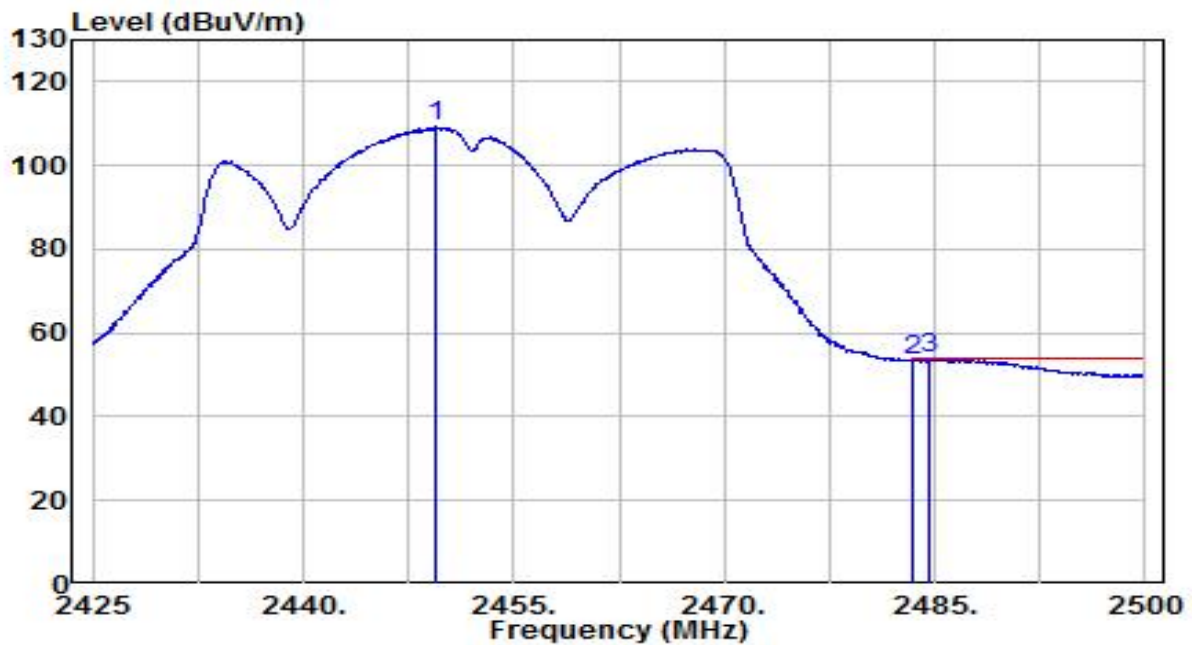


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.375	76.99	32.17	109.16	N/A	N/A	130	160	Average
2	2483.500	21.11	32.30	53.41	-0.59	54.00	130	160	Average
3	* 2484.700	21.44	32.30	53.75	-0.25	54.00	130	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

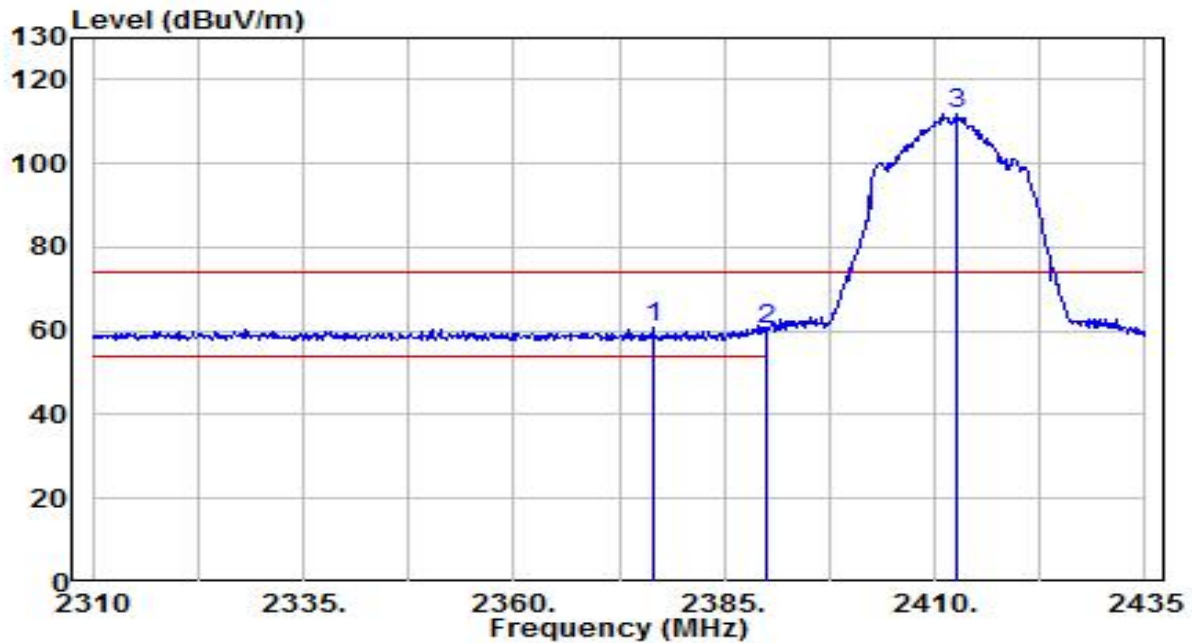


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2376.625	28.69	31.90	60.59	-13.41	74.00	145	230	Peak
2		2390.000	28.58	31.95	60.53	-13.47	74.00	145	230	Peak
3		2412.625	79.79	32.03	111.83	N/A	N/A	145	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

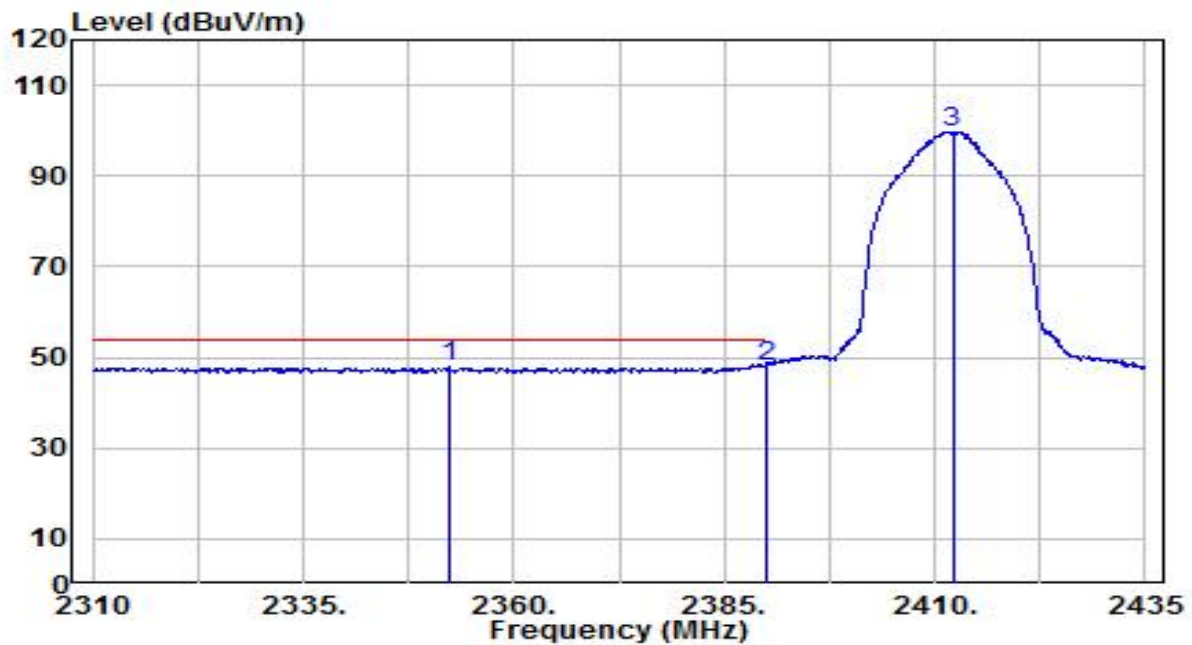


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2352.375	16.07	31.81	47.88	-6.12	54.00	145	230	Average
2	*	2390.000	16.12	31.95	48.07	-5.93	54.00	145	230	Average
3		2412.125	67.78	32.03	99.81	N/A	N/A	145	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

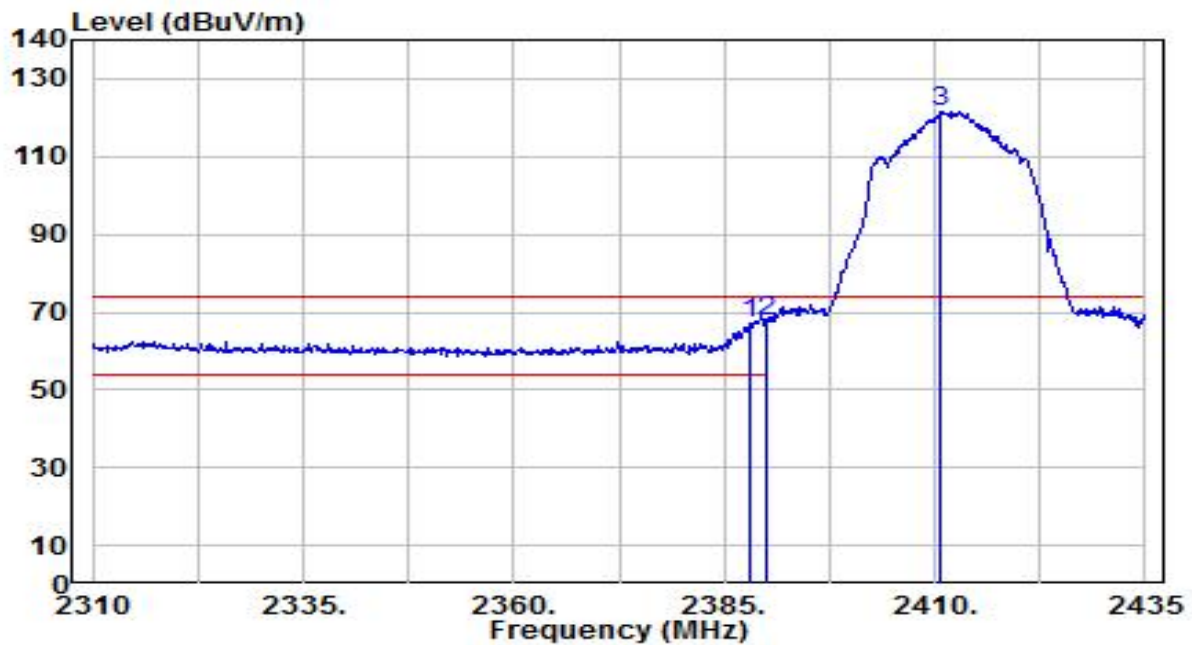


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	34.96	31.94	66.90	-7.10	74.00	125	200	Peak
2	*	2390.000	35.58	31.95	67.53	-6.47	74.00	125	200	Peak
3		2410.750	89.39	32.03	121.41	N/A	N/A	125	200	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

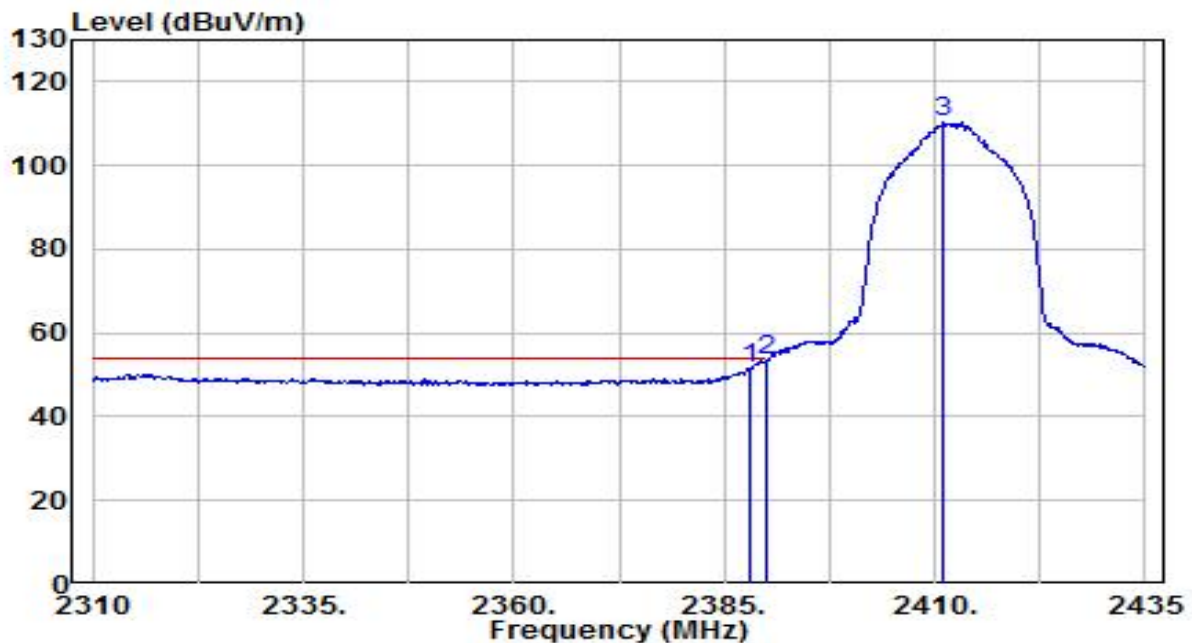


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	19.62	31.94	51.56	-2.44	54.00	125	200	Average
2	*	2390.000	21.76	31.95	53.70	-0.30	54.00	125	200	Average
3		2411.125	78.16	32.03	110.19	N/A	N/A	125	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

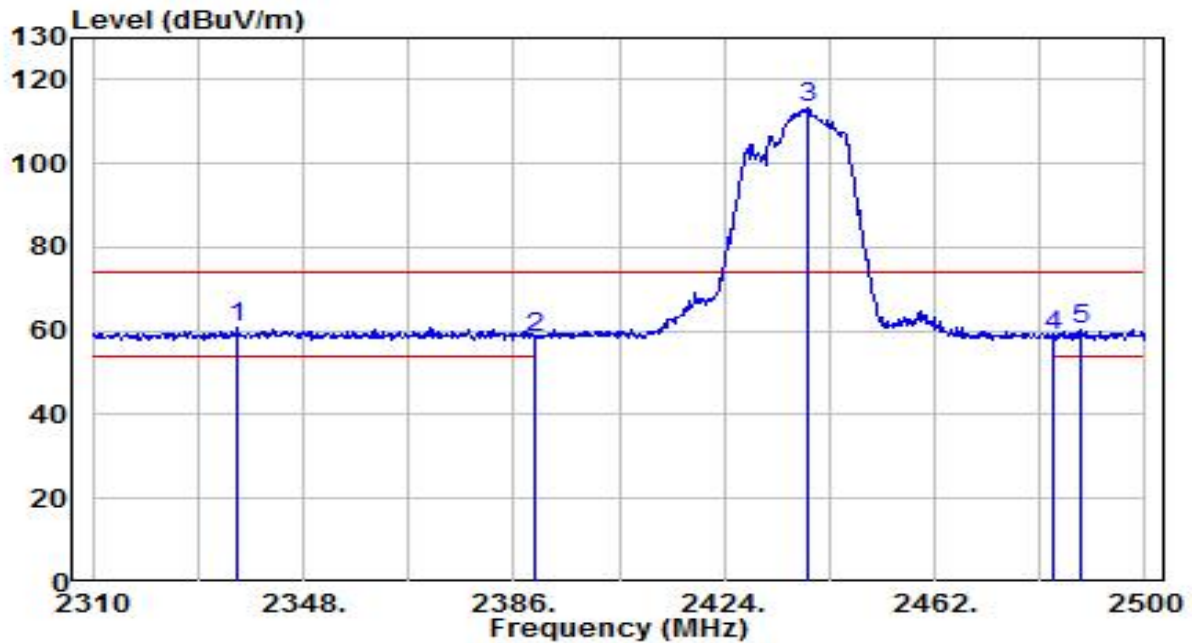


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2336.030	29.04	31.75	60.79	-13.21	74.00	135	40	Peak
2		2390.000	26.25	31.95	58.20	-15.80	74.00	135	40	Peak
3		2439.010	81.10	32.13	113.23	N/A	N/A	135	40	Peak
4		2483.500	26.79	32.30	59.08	-14.92	74.00	135	40	Peak
5		2488.410	28.21	32.32	60.53	-13.47	74.00	135	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

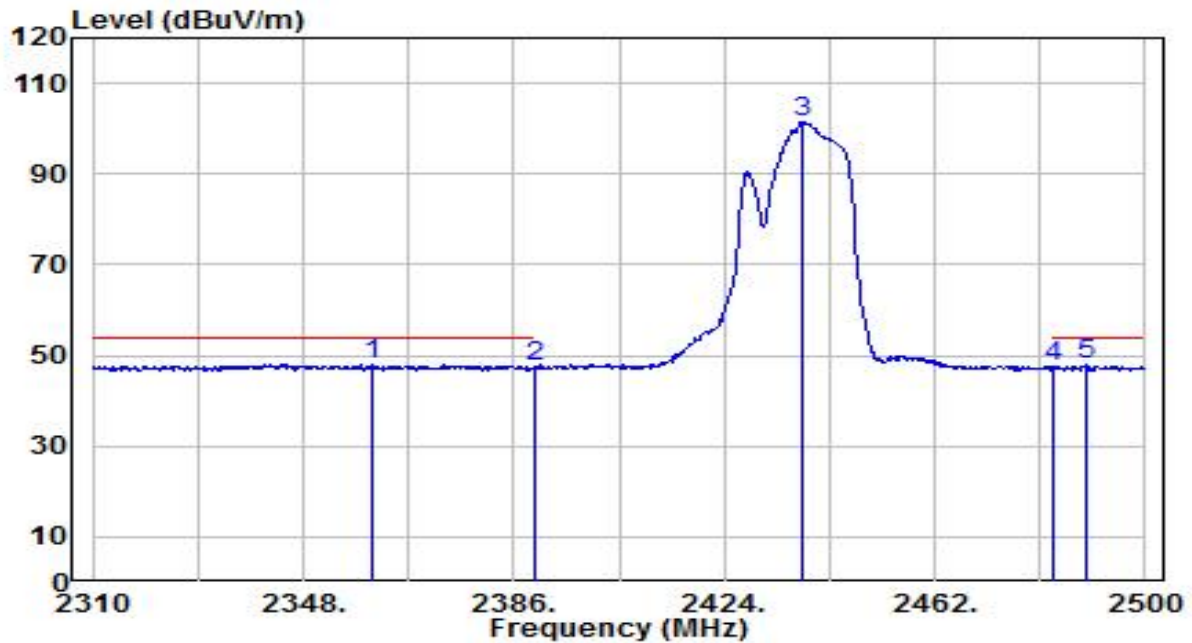


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2360.540	16.11	31.84	47.95	-6.05	54.00	135	40	Average
2	2390.000	15.42	31.95	47.37	-6.63	54.00	135	40	Average
3	2438.250	69.28	32.13	101.41	N/A	N/A	135	40	Average
4	2483.500	15.09	32.30	47.39	-6.61	54.00	135	40	Average
5	* 2489.170	15.67	32.32	47.99	-6.01	54.00	135	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

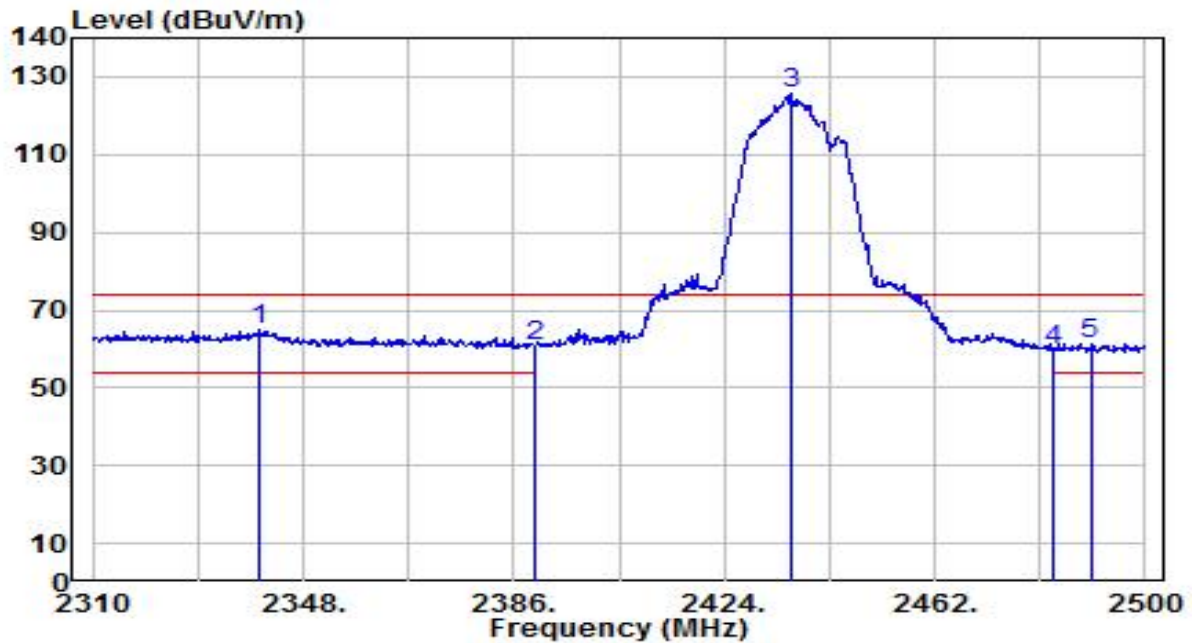


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.210	33.28	31.76	65.04	-8.96	74.00	130	165	Peak
2		2390.000	29.02	31.95	60.97	-13.03	74.00	130	165	Peak
3		2436.350	93.48	32.12	125.60	N/A	N/A	130	165	Peak
4		2483.500	27.33	32.30	59.63	-14.37	74.00	130	165	Peak
5		2490.120	29.19	32.32	61.51	-12.49	74.00	130	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

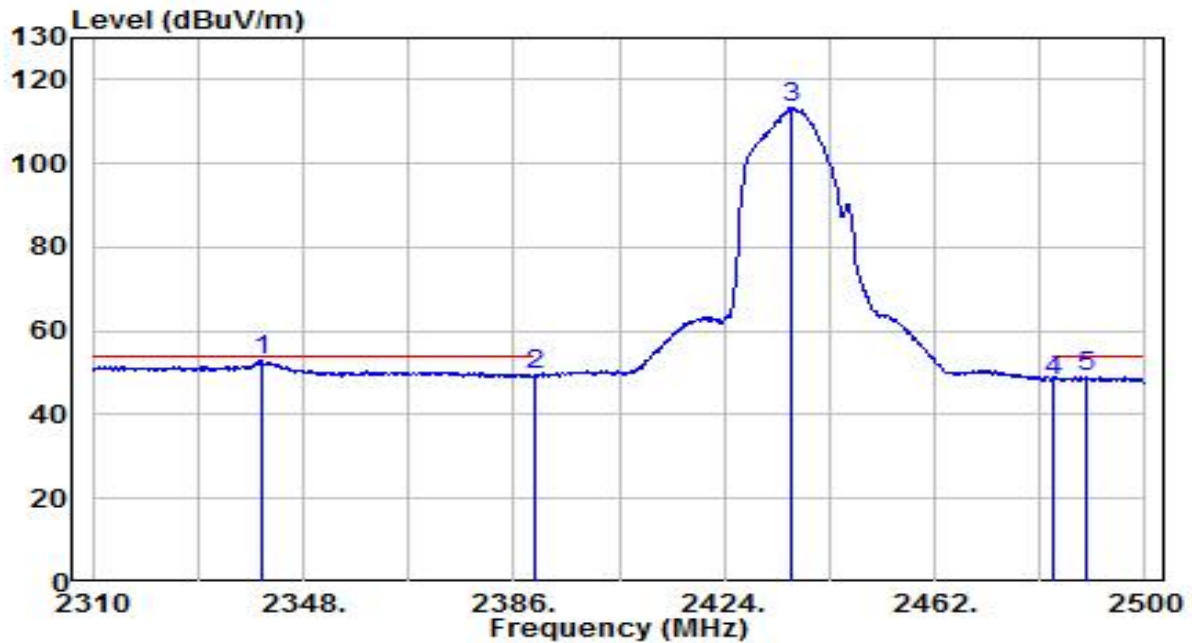


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.780	21.12	31.76	52.88	-1.12	54.00	130	165	Average
2		2390.000	17.80	31.95	49.75	-4.25	54.00	130	165	Average
3		2435.970	81.21	32.12	113.33	N/A	N/A	130	165	Average
4		2483.500	15.96	32.30	48.26	-5.74	54.00	130	165	Average
5		2489.170	16.64	32.32	48.96	-5.04	54.00	130	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

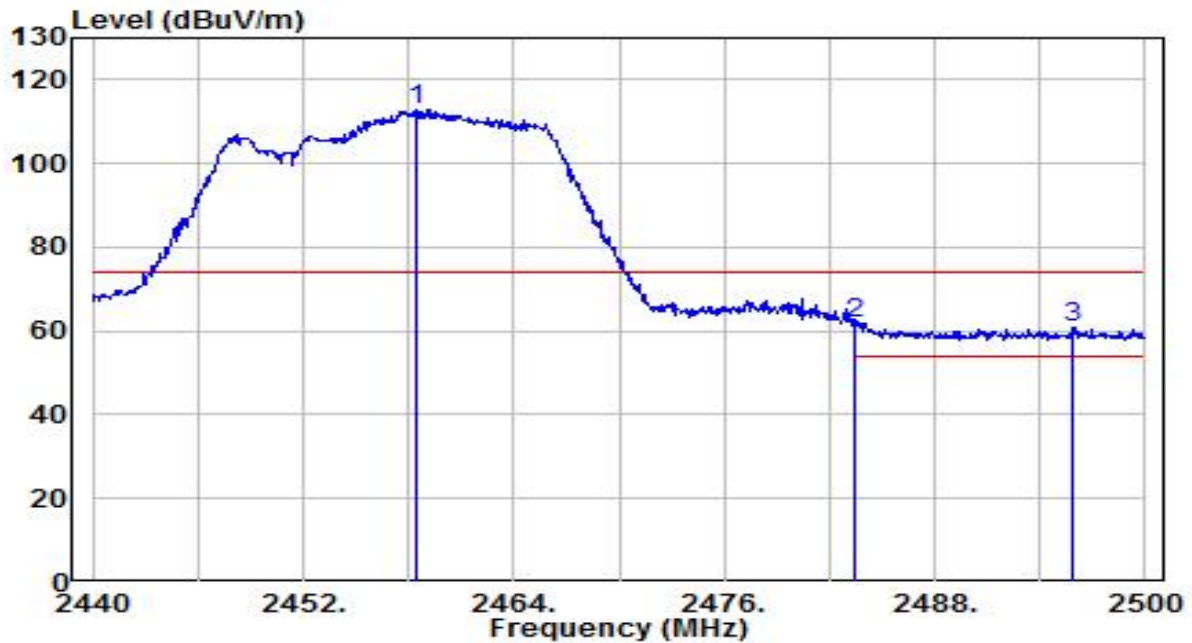


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.420	80.59	32.20	112.80	N/A	N/A	175	315	Peak
2	* 2483.500	29.58	32.30	61.88	-12.12	74.00	175	315	Peak
3	2495.920	28.66	32.34	61.01	-12.99	74.00	175	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

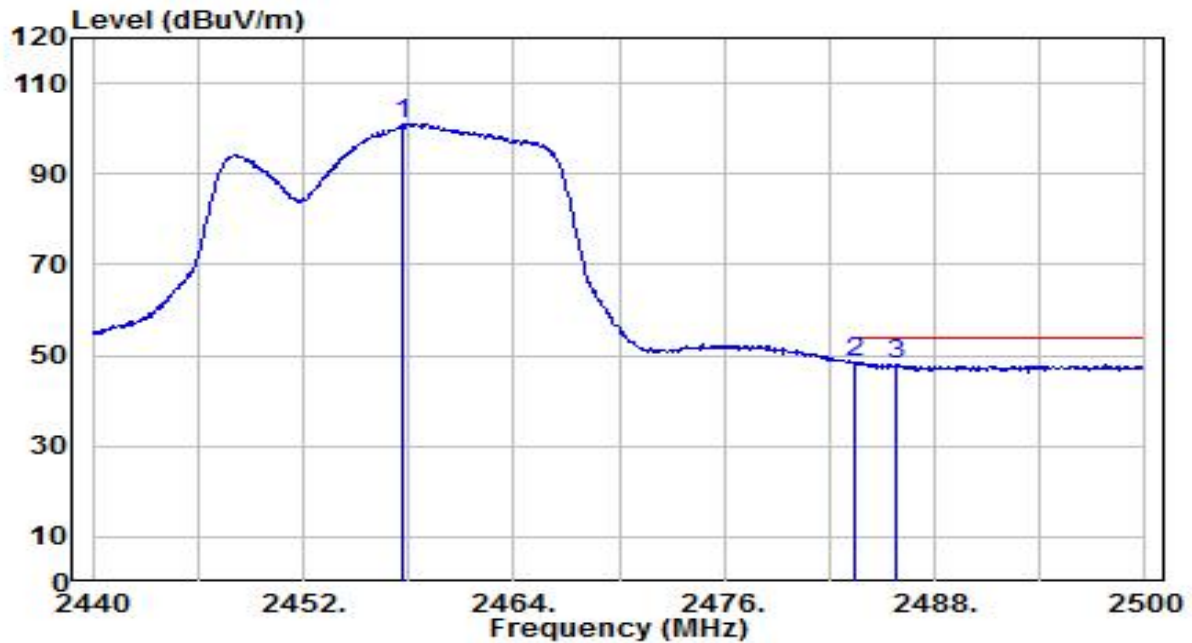


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.640	68.93	32.20	101.13	N/A	N/A	175	315	Average
2	*	2483.500	16.08	32.30	48.38	-5.62	54.00	175	315	Average
3		2485.840	15.73	32.31	48.04	-5.96	54.00	175	315	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

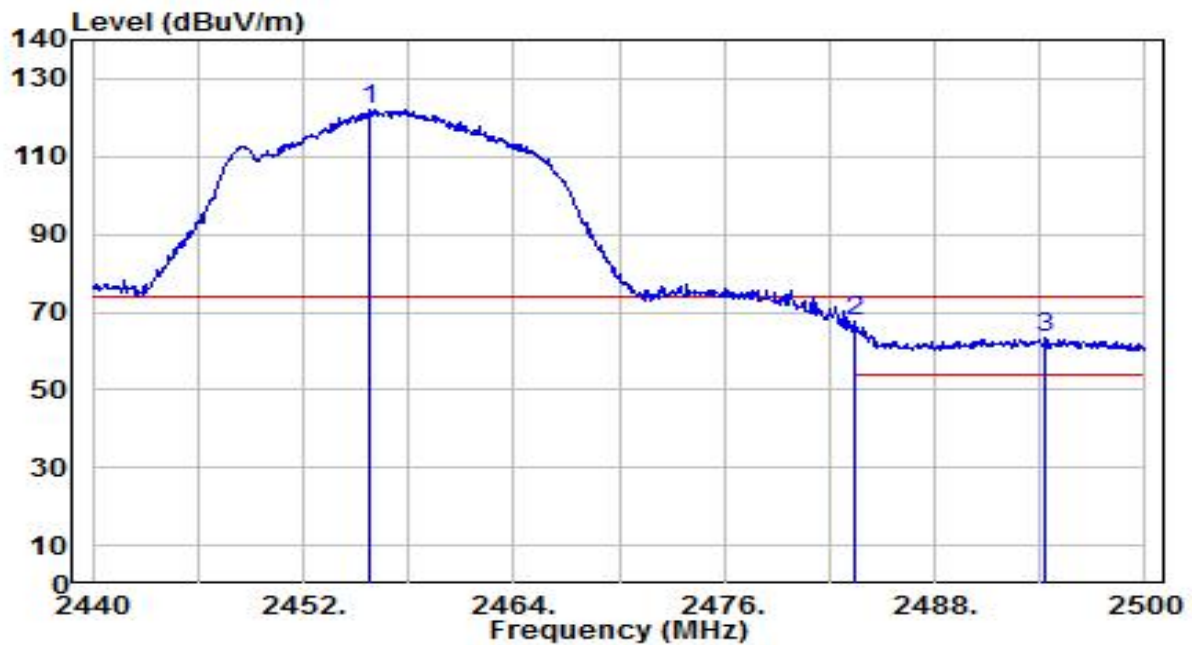


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.840	89.97	32.19	122.17	N/A	N/A	145	145	Peak
2	* 2483.500	35.06	32.30	67.36	-6.64	74.00	145	145	Peak
3	2494.300	31.25	32.34	63.59	-10.41	74.00	145	145	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

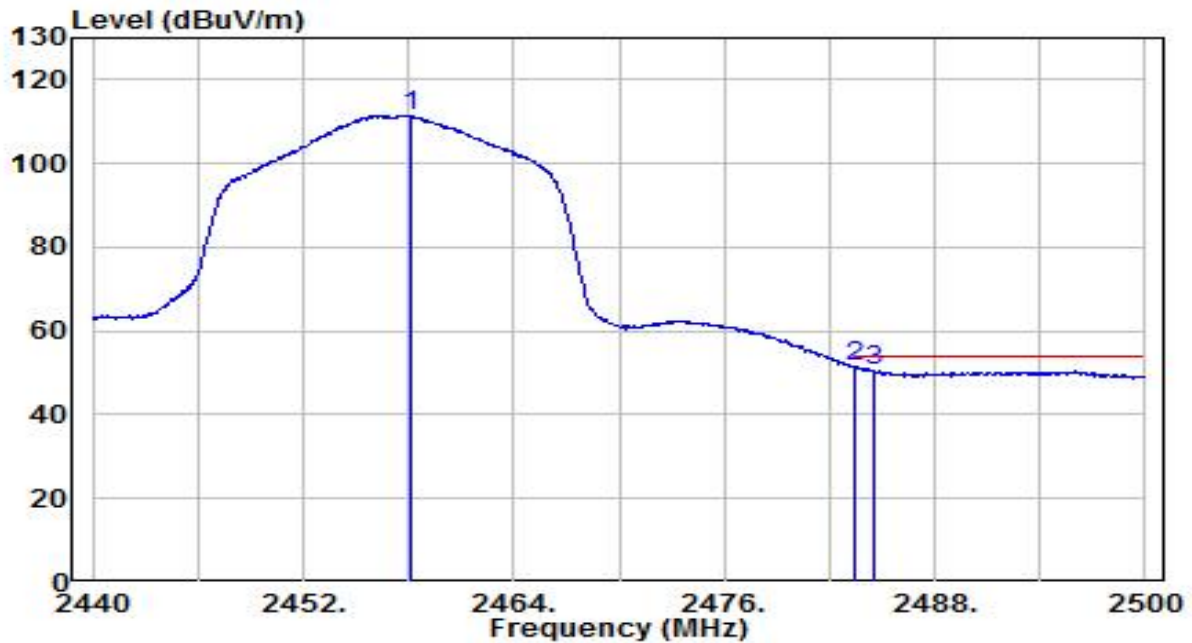


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.180	79.37	32.20	111.57	N/A	N/A	145	145	Average
2	* 2483.500	19.25	32.30	51.55	-2.45	54.00	145	145	Average
3	2484.520	18.17	32.30	50.47	-3.53	54.00	145	145	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

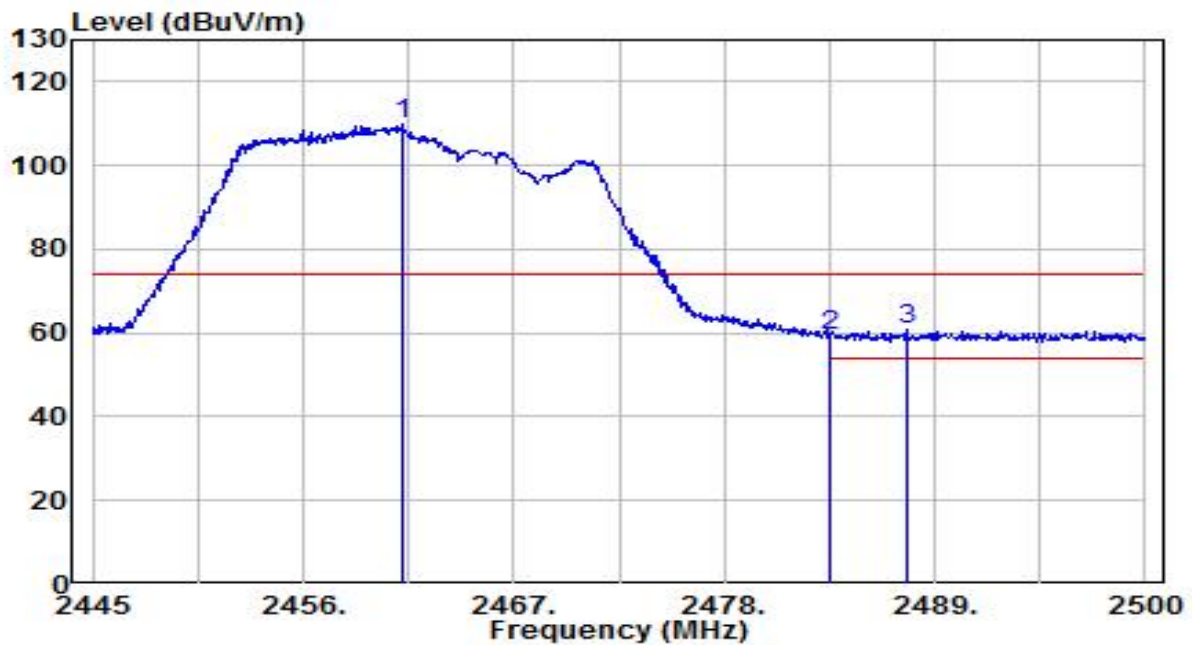


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.170	77.71	32.21	109.93	N/A	N/A	165	315	Peak
2	2483.500	26.86	32.30	59.16	-14.84	74.00	165	315	Peak
3	* 2487.515	28.38	32.31	60.69	-13.31	74.00	165	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

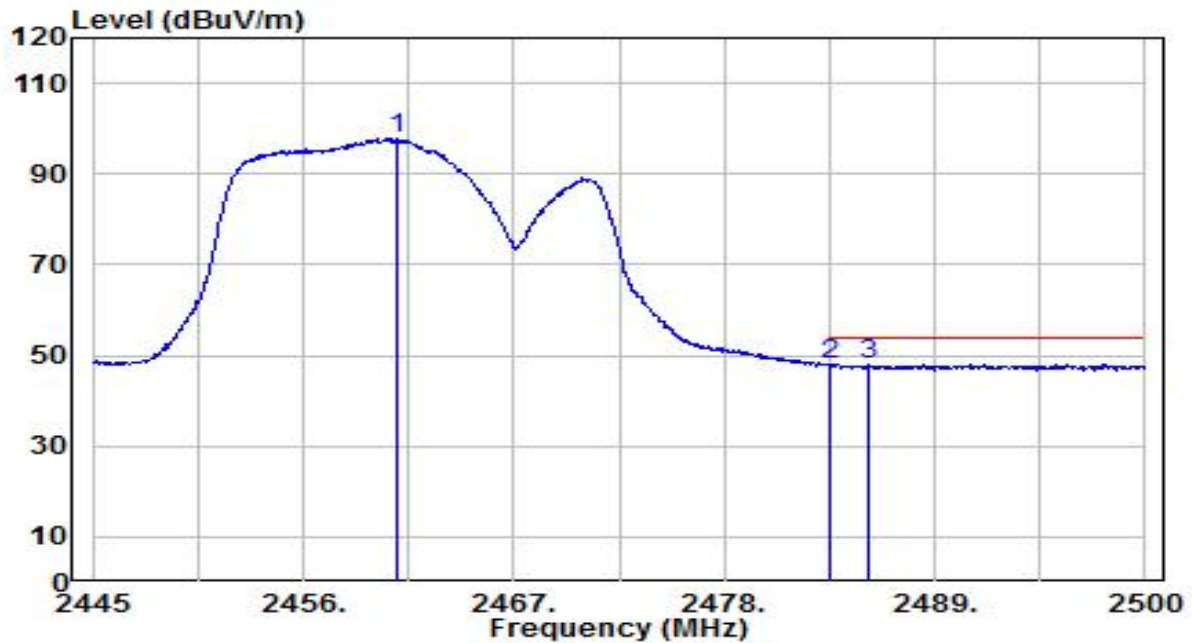


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.840	65.60	32.21	97.81	N/A	N/A	165	315	Average
2	2483.500	15.59	32.30	47.88	-6.12	54.00	165	315	Average
3	* 2485.535	15.69	32.31	48.00	-6.00	54.00	165	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

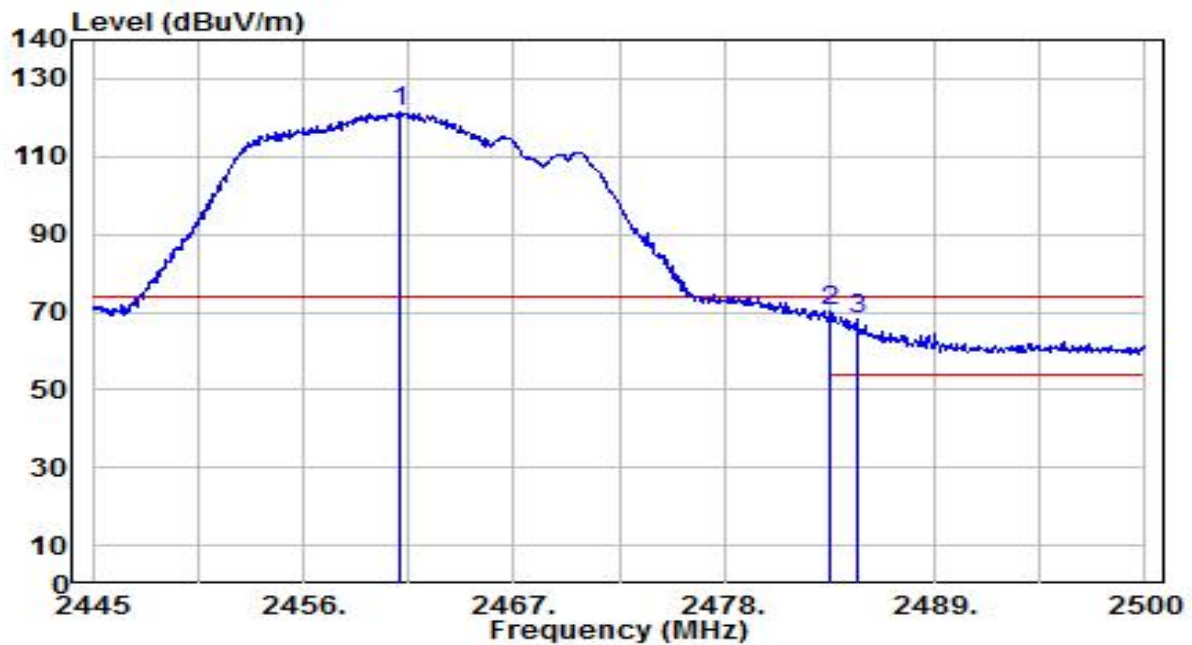


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	89.26	32.21	121.48	N/A	N/A	110	160	Peak
2	* 2483.500	37.74	32.30	70.04	-3.96	74.00	110	160	Peak
3	2484.930	36.07	32.30	68.37	-5.63	74.00	110	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

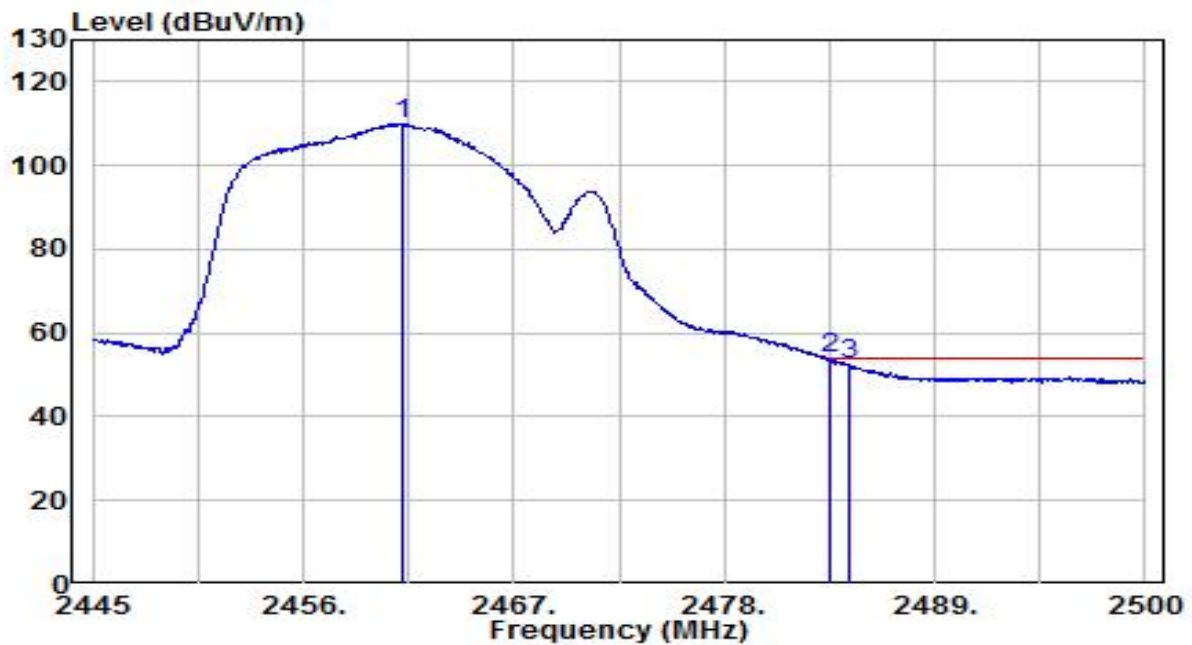


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.170	77.67	32.21	109.89	N/A	N/A	110	160	Average
2	*	2483.500	21.42	32.30	53.72	-0.28	54.00	110	160	Average
3		2484.490	20.33	32.30	52.63	-1.37	54.00	110	160	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

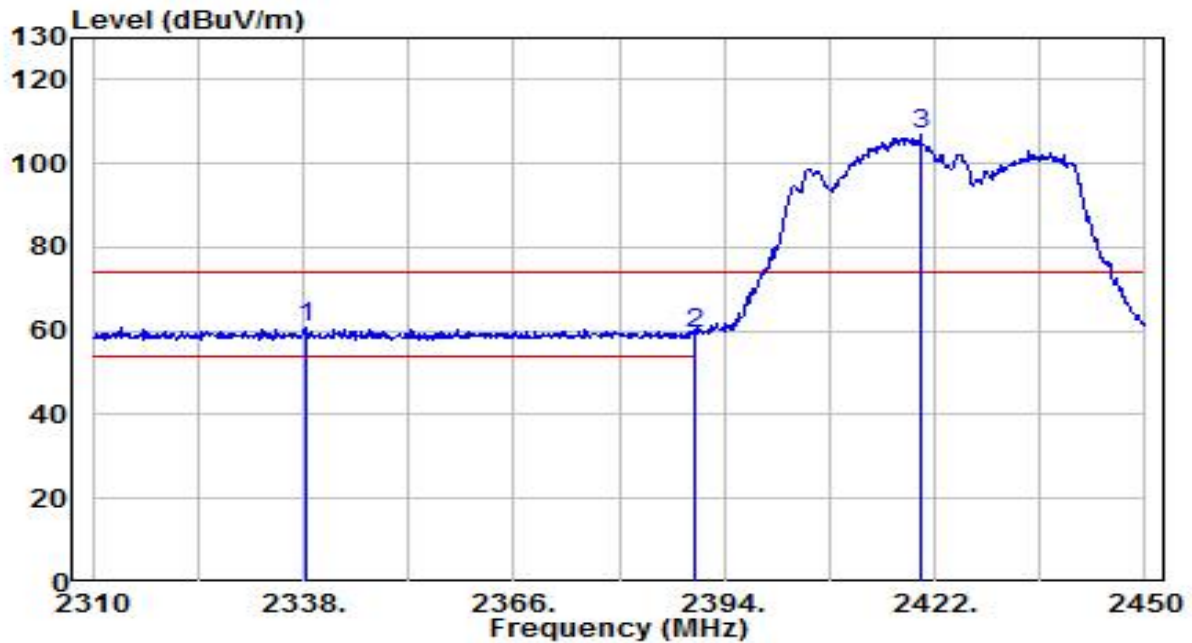


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2338.280	29.31	31.76	61.06	-12.94	74.00	140	45	Peak
2		2390.000	27.44	31.95	59.38	-14.62	74.00	140	45	Peak
3		2420.180	74.67	32.06	106.73	N/A	N/A	140	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

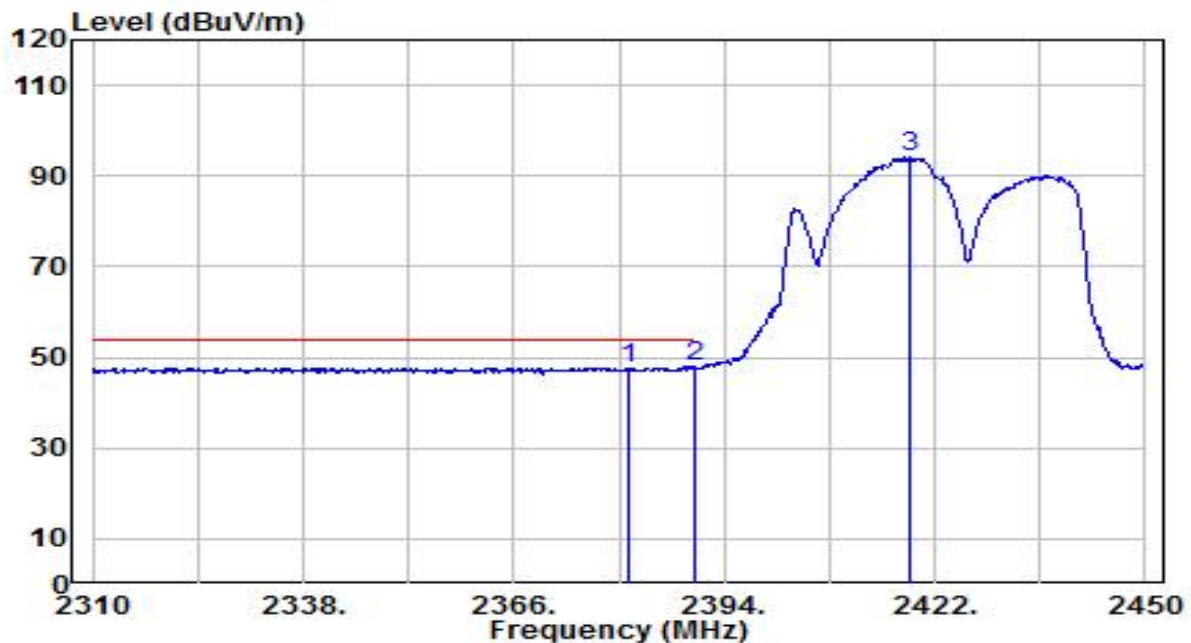


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2381.120	15.86	31.92	47.77	-6.23	54.00	140	45	Average
2	*	2390.000	15.87	31.95	47.82	-6.18	54.00	140	45	Average
3		2418.780	62.01	32.06	94.06	N/A	N/A	140	45	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

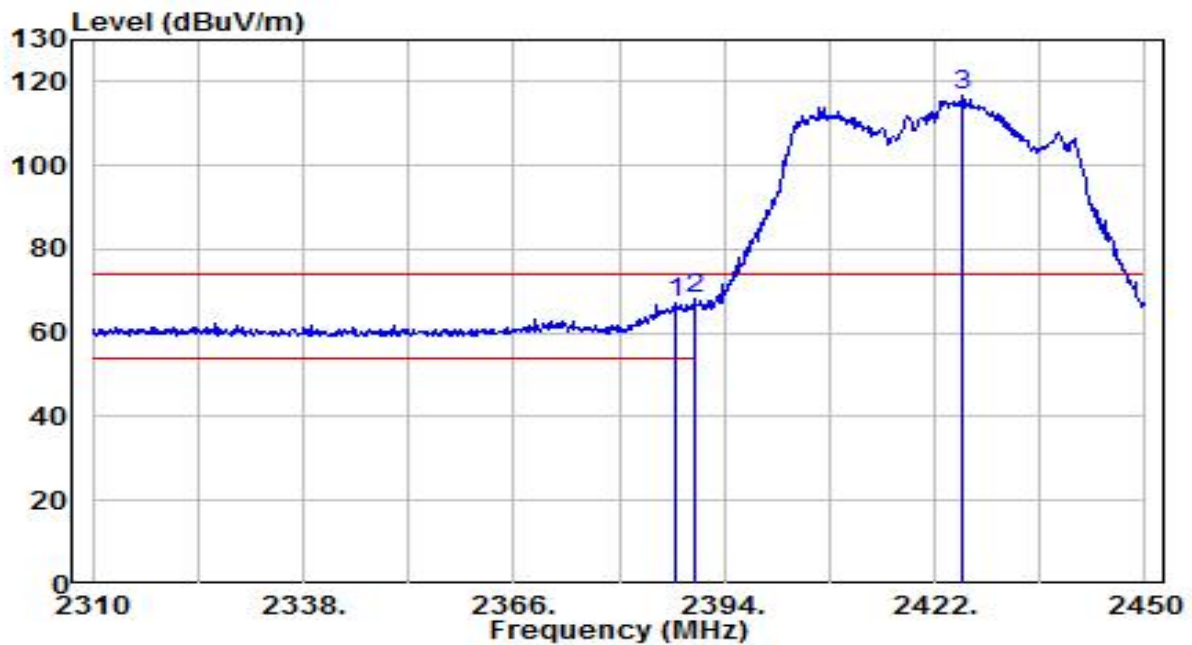


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.700	35.49	31.94	67.43	-6.57	74.00	155	155	Peak
2	* 2390.000	36.14	31.95	68.09	-5.91	74.00	155	155	Peak
3	2425.780	84.74	32.08	116.83	N/A	N/A	155	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

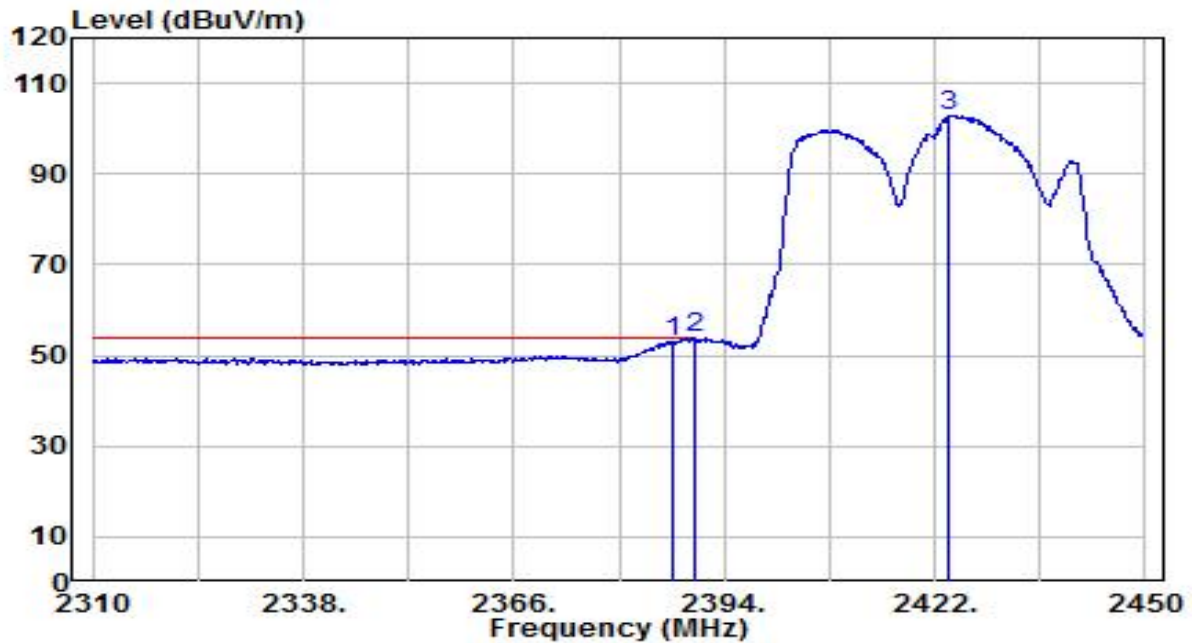


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.280	21.23	31.94	53.17	-0.83	54.00	155	155	Average
2	*	2390.000	21.89	31.95	53.84	-0.16	54.00	155	155	Average
3		2423.960	70.82	32.08	102.89	N/A	N/A	155	155	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

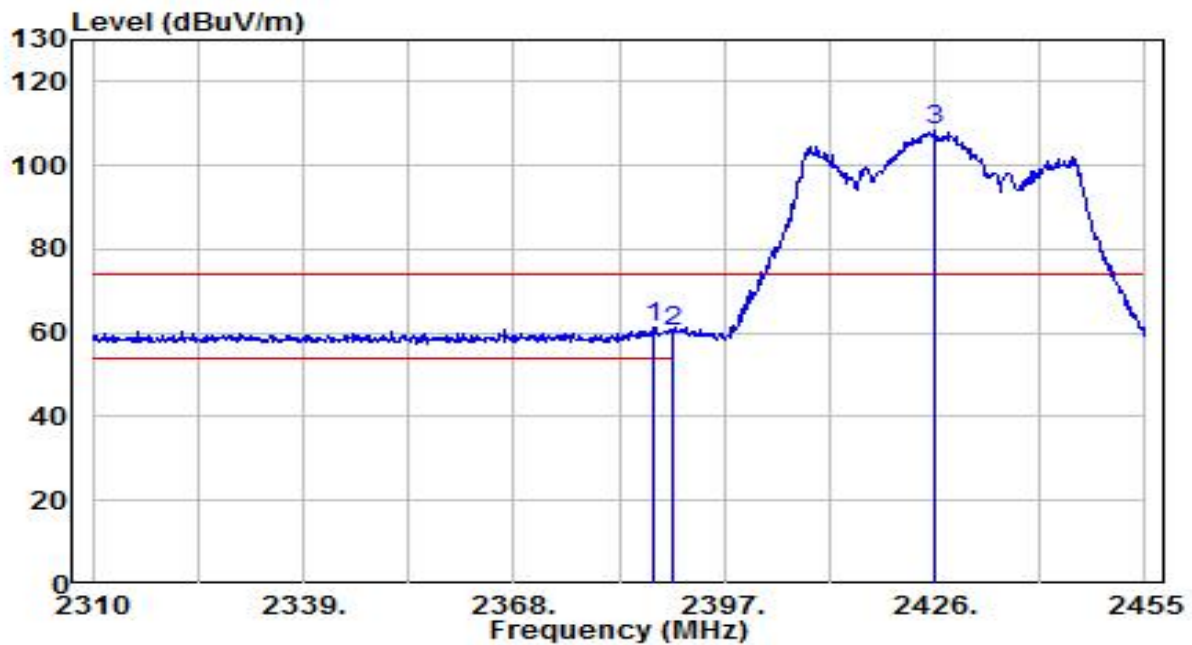


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	29.48	31.94	61.42	-12.58	74.00	160	300	Peak
2		2390.000	28.30	31.95	60.24	-13.76	74.00	160	300	Peak
3		2426.145	76.46	32.08	108.55	N/A	N/A	160	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

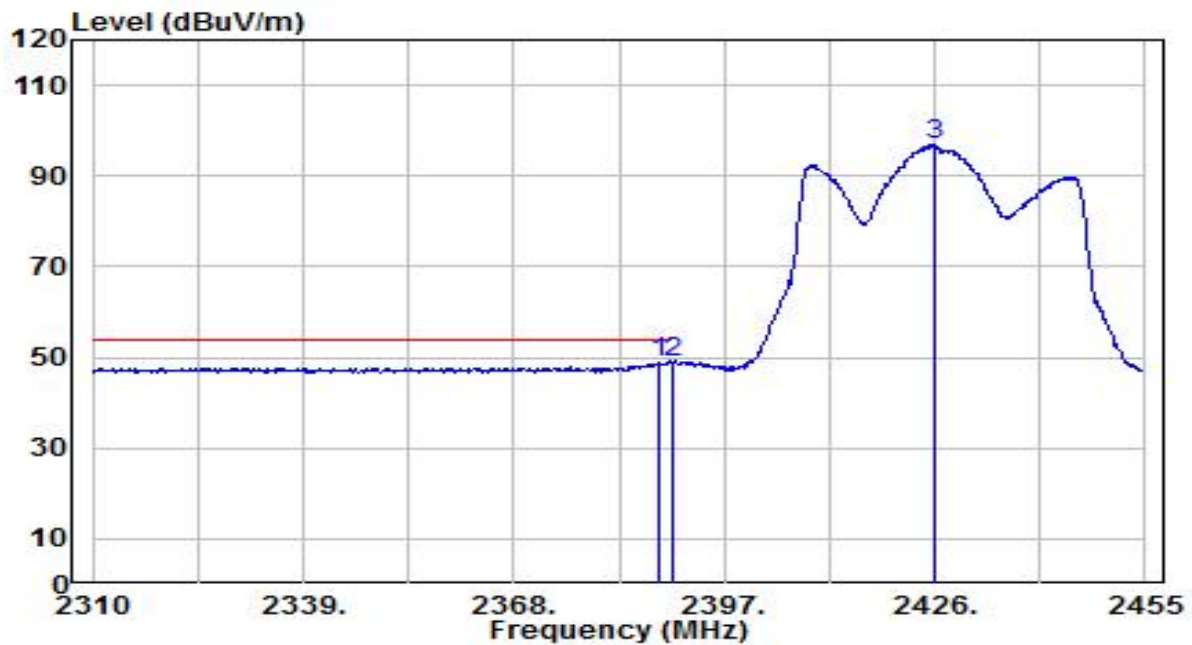


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.010	16.76	31.94	48.70	-5.30	54.00	160	300	Average
2	*	2390.000	16.96	31.95	48.91	-5.09	54.00	160	300	Average
3		2426.145	64.83	32.08	96.91	N/A	N/A	160	300	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

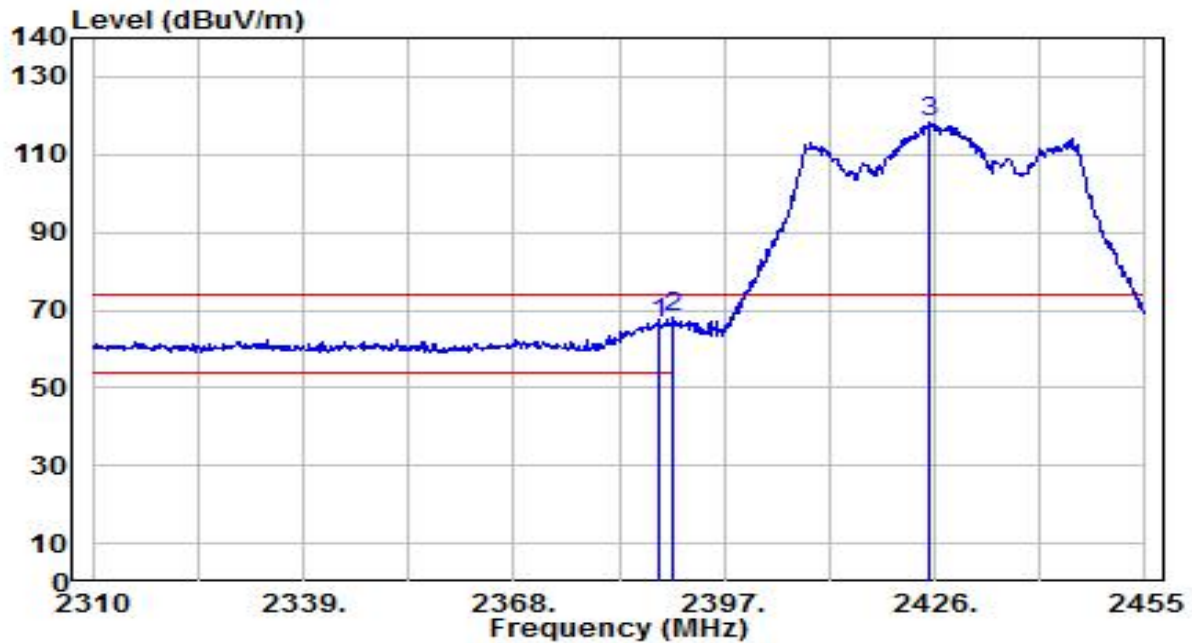


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.010	34.65	31.94	66.59	-7.41	74.00	135	160	Peak
2	* 2390.000	36.04	31.95	67.99	-6.01	74.00	135	160	Peak
3	2425.420	86.29	32.08	118.37	N/A	N/A	135	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

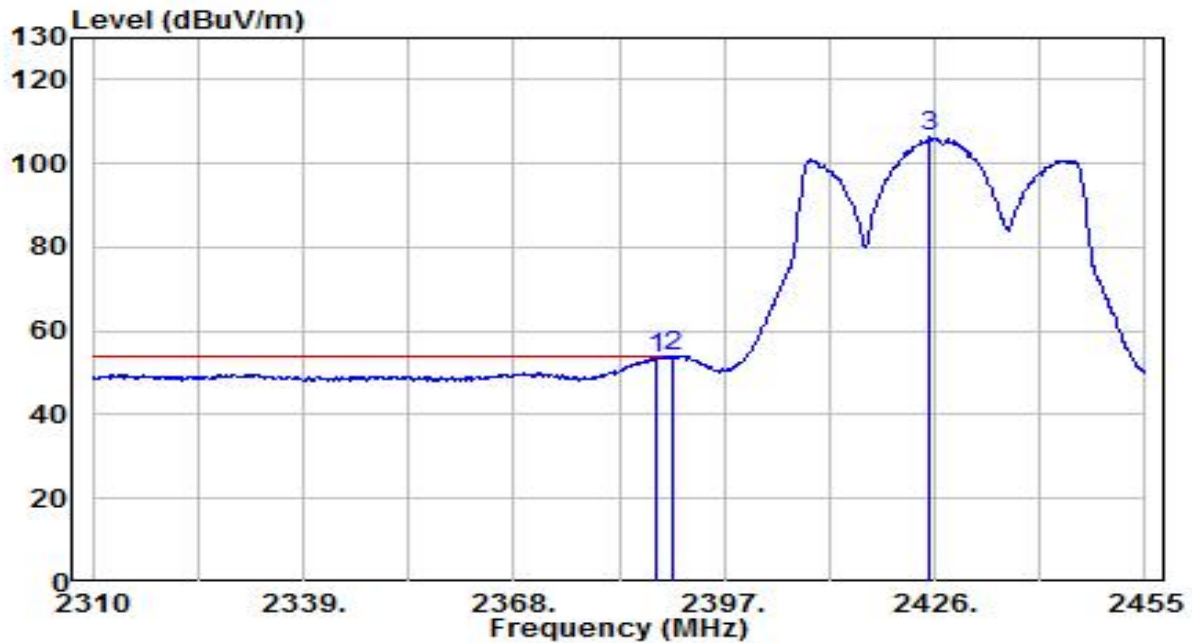


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.720	21.69	31.94	53.63	-0.37	54.00	135	160	Average
2	* 2390.000	21.77	31.95	53.72	-0.28	54.00	135	160	Average
3	2425.420	74.16	32.08	106.25	N/A	N/A	135	160	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

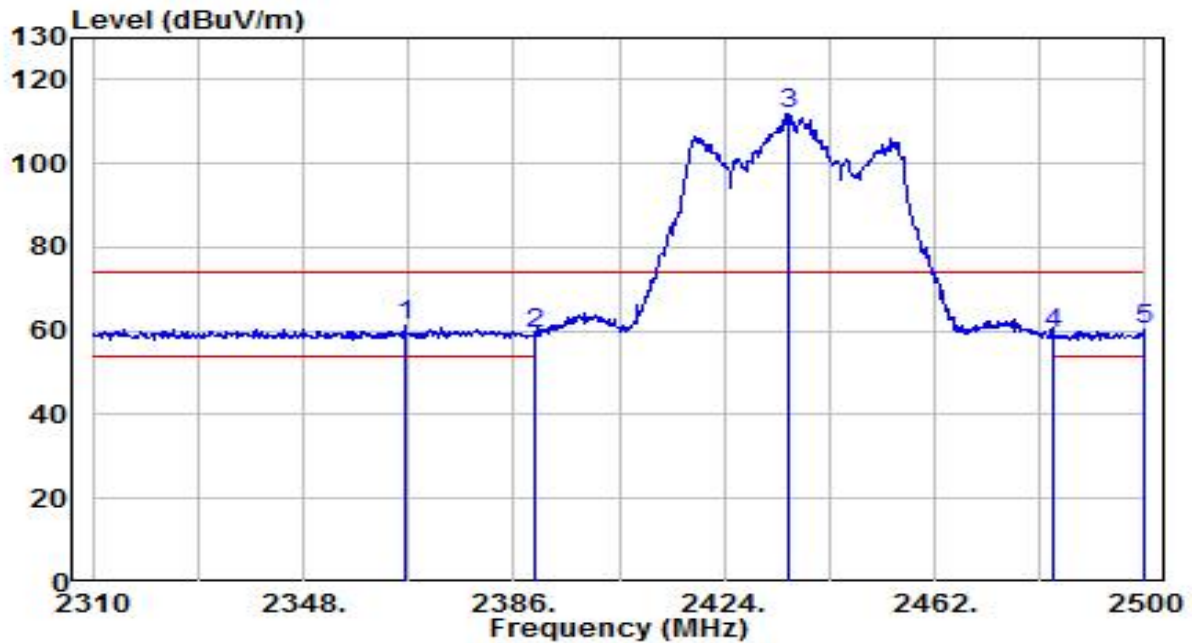


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2366.240	29.32	31.86	61.18	-12.82	74.00	110	235	Peak
2		2390.000	27.61	31.95	59.56	-14.44	74.00	110	235	Peak
3		2435.780	79.78	32.12	111.90	N/A	N/A	110	235	Peak
4		2483.500	26.84	32.30	59.14	-14.86	74.00	110	235	Peak
5		2499.620	27.97	32.36	60.32	-13.68	74.00	110	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

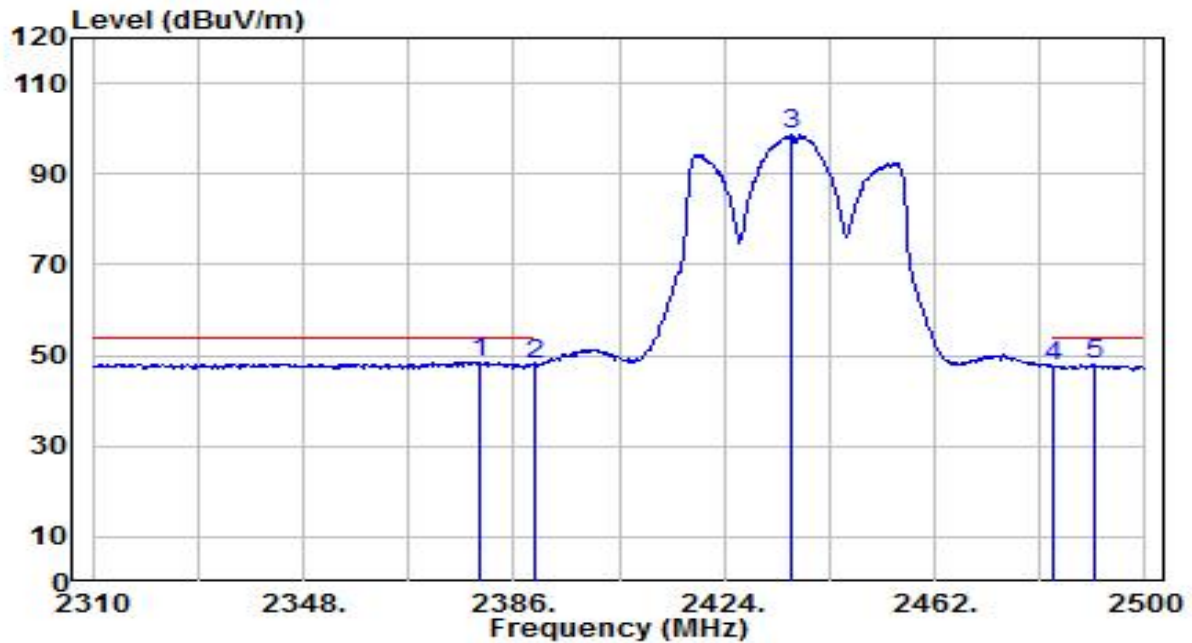


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2379.920	16.68	31.91	48.59	-5.41	54.00	110	235	Average
2		2390.000	16.05	31.95	48.00	-6.00	54.00	110	235	Average
3		2435.970	66.59	32.12	98.71	N/A	N/A	110	235	Average
4		2483.500	15.21	32.30	47.51	-6.49	54.00	110	235	Average
5		2490.880	15.61	32.33	47.94	-6.06	54.00	110	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

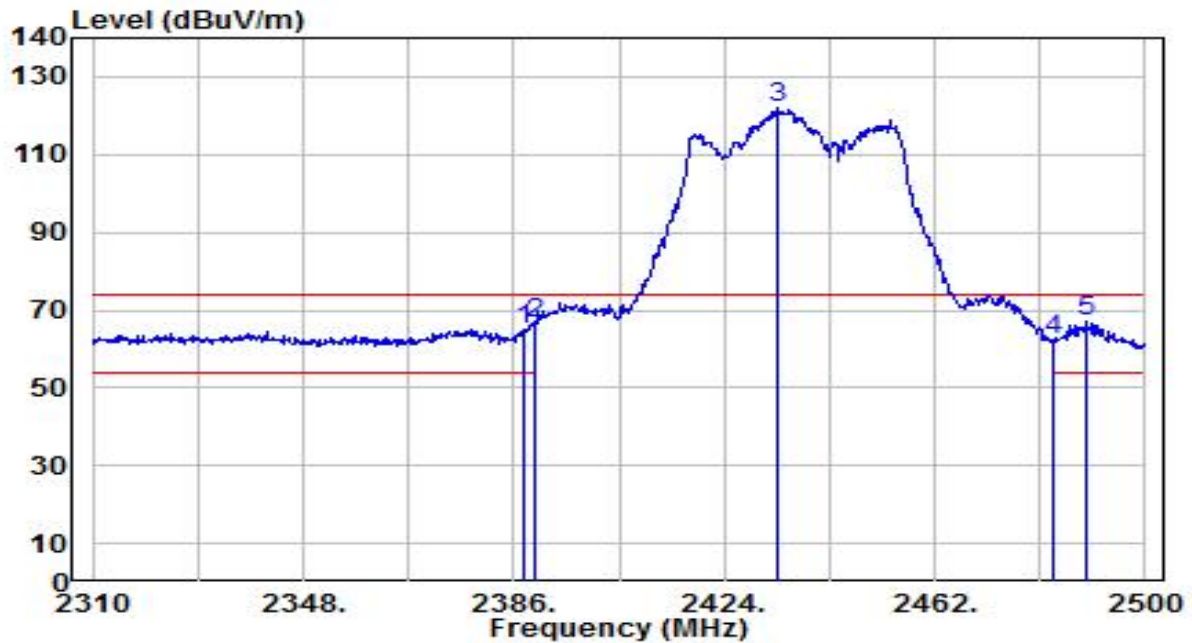


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	33.13	31.94	65.07	-8.93	74.00	120	160	Peak
2	2390.000	34.62	31.95	66.57	-7.43	74.00	120	160	Peak
3	2433.500	89.83	32.11	121.94	N/A	N/A	120	160	Peak
4	2483.500	30.03	32.30	62.33	-11.67	74.00	120	160	Peak
5	* 2489.360	34.62	32.32	66.95	-7.05	74.00	120	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

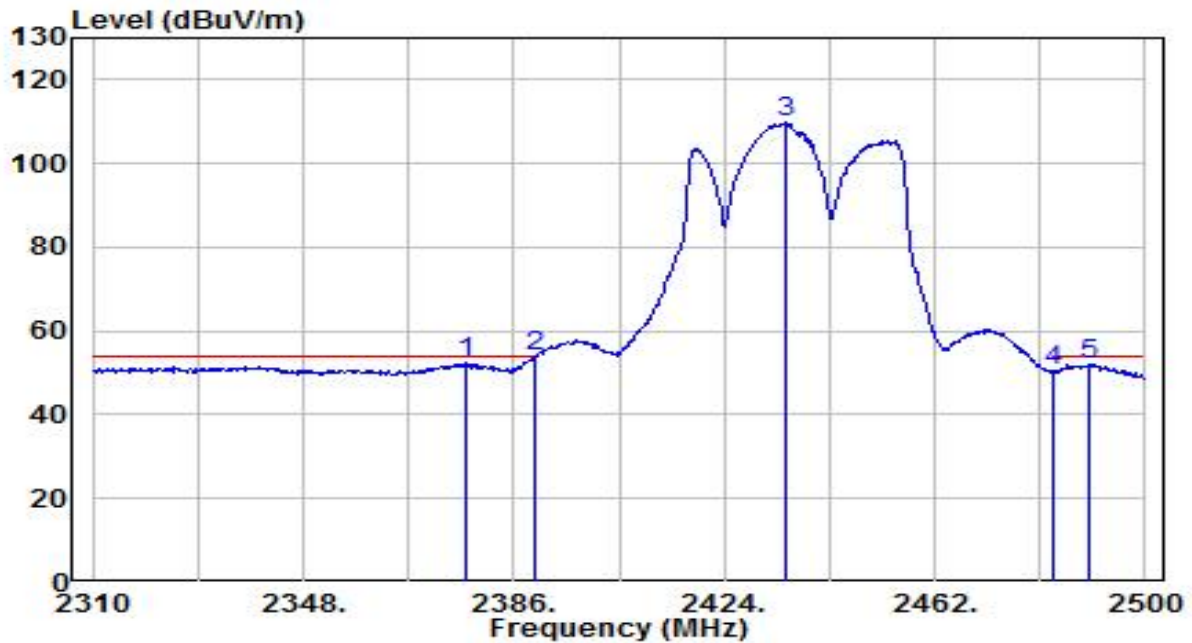


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2377.260	20.53	31.90	52.43	-1.57	54.00	120	160	Average
2	*	2390.000	21.95	31.95	53.90	-0.10	54.00	120	160	Average
3		2435.210	77.97	32.12	110.08	N/A	N/A	120	160	Average
4		2483.500	18.13	32.30	50.43	-3.57	54.00	120	160	Average
5		2489.930	19.68	32.32	52.00	-2.00	54.00	120	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

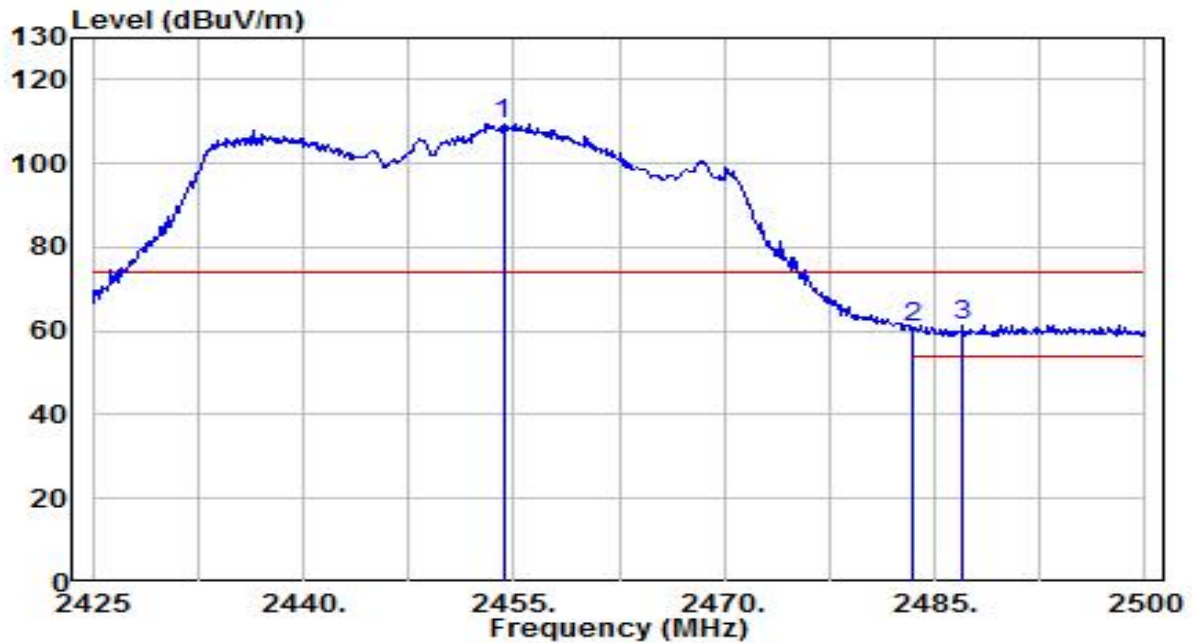


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.250	77.25	32.19	109.44	N/A	N/A	155	315	Peak
2	2483.500	28.34	32.30	60.64	-13.36	74.00	155	315	Peak
3	* 2486.950	29.25	32.31	61.56	-12.44	74.00	155	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

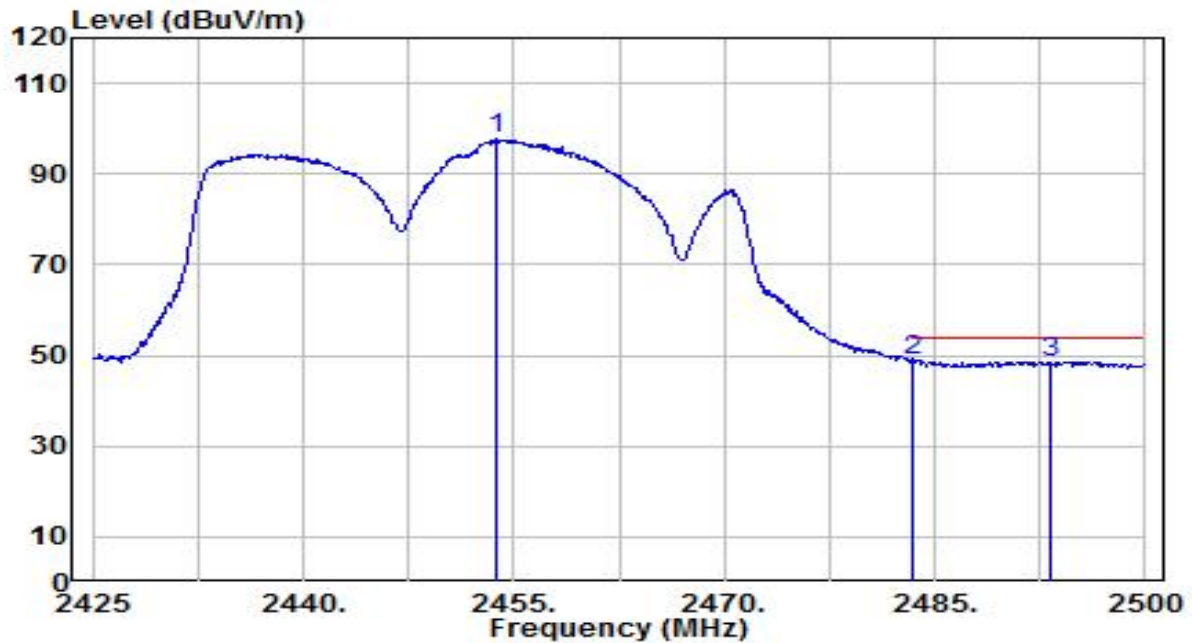


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2453.725	65.41	32.19	97.60	N/A	N/A	155	315	Average
2	*	2483.500	16.39	32.30	48.69	-5.31	54.00	155	315	Average
3		2493.250	16.27	32.33	48.61	-5.39	54.00	155	315	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

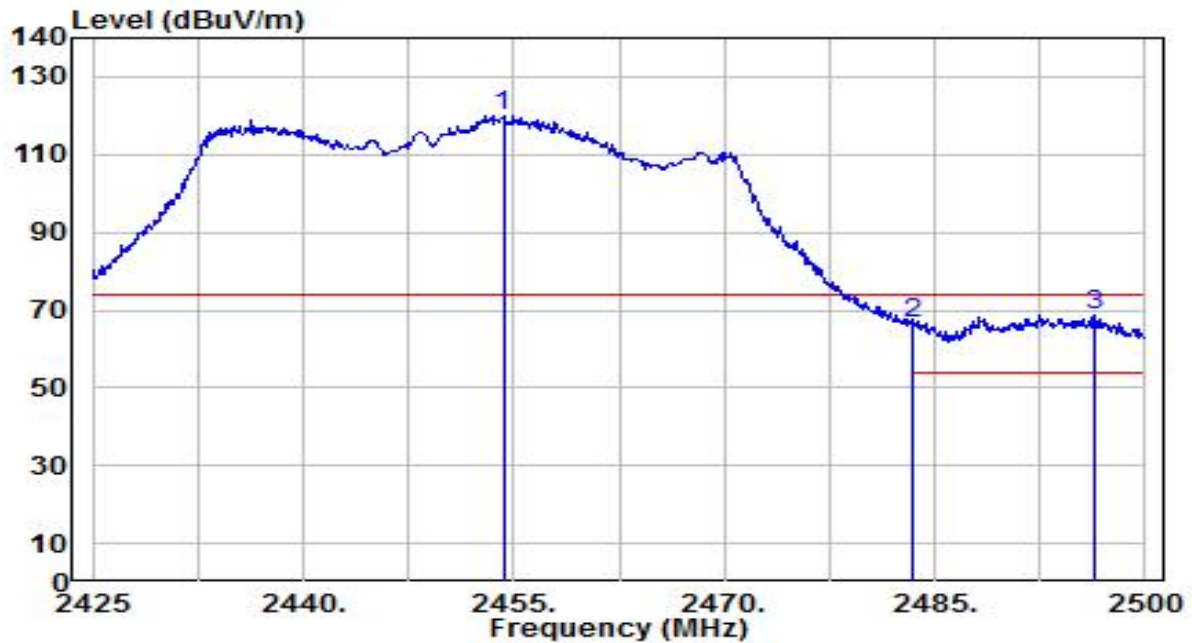


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.250	87.68	32.19	119.87	N/A	N/A	160	155	Peak
2	2483.500	34.33	32.30	66.63	-7.37	74.00	160	155	Peak
3	* 2496.475	36.31	32.35	68.66	-5.34	74.00	160	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

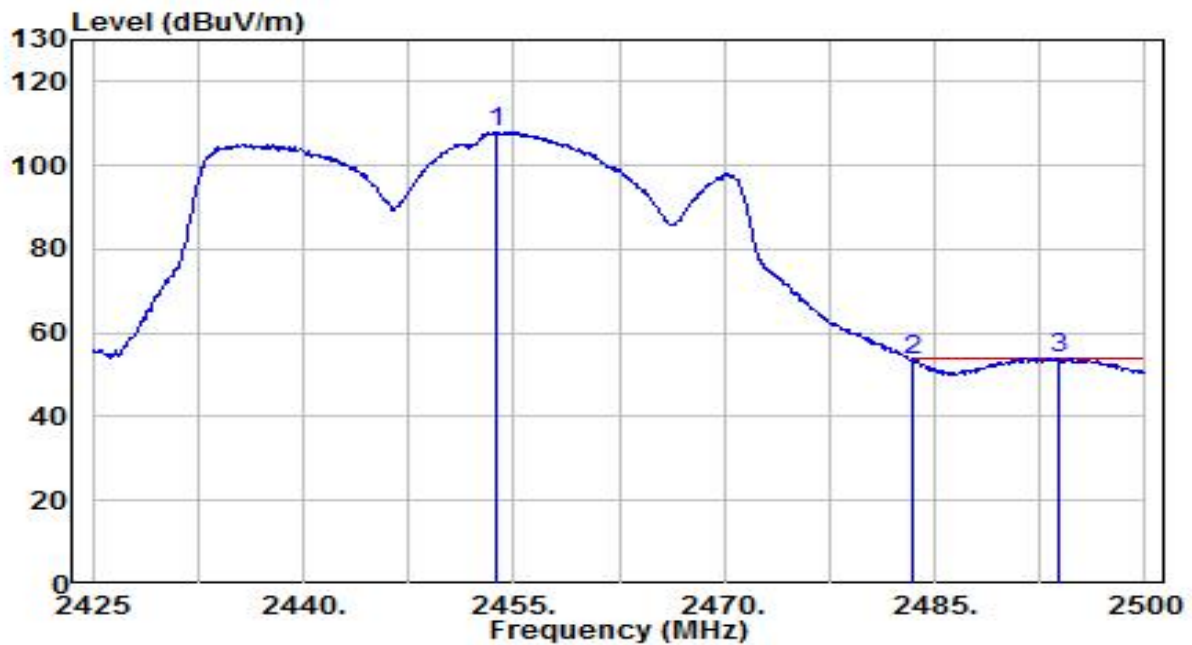


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.800	75.92	32.19	108.10	N/A	N/A	160	155	Average
2	2483.500	21.07	32.30	53.37	-0.63	54.00	160	155	Average
3	* 2493.775	21.55	32.34	53.89	-0.11	54.00	160	155	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

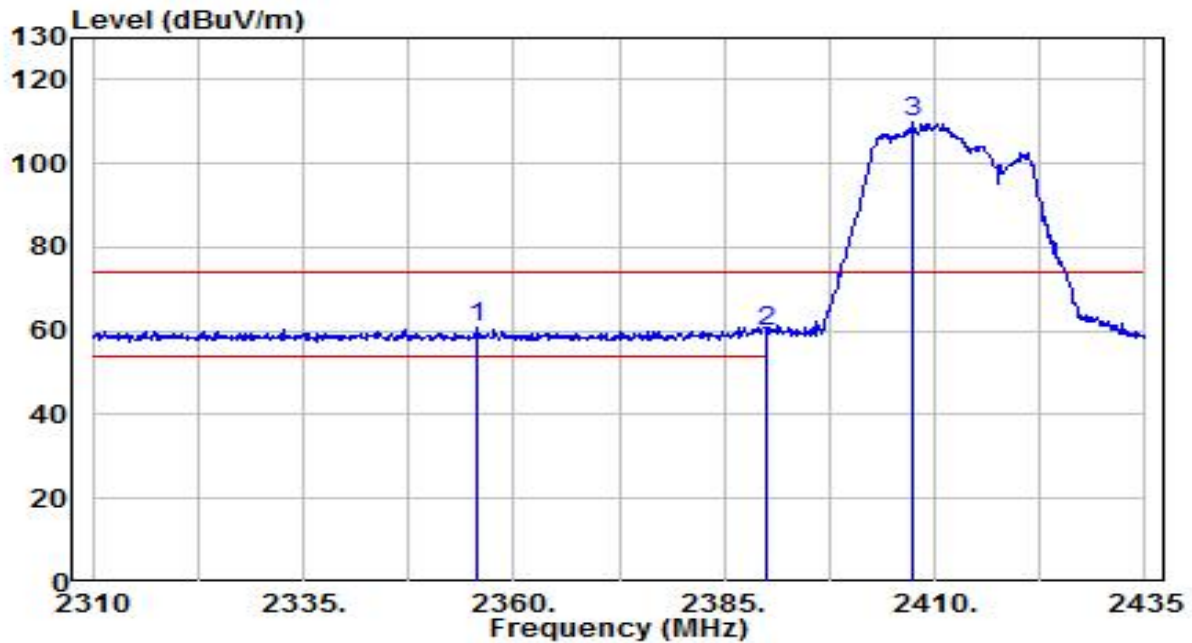


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2355.625	28.94	31.82	60.76	-13.24	74.00	135	45	Peak
2		2390.000	28.03	31.95	59.98	-14.02	74.00	135	45	Peak
3		2407.375	78.10	32.01	110.11	N/A	N/A	135	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

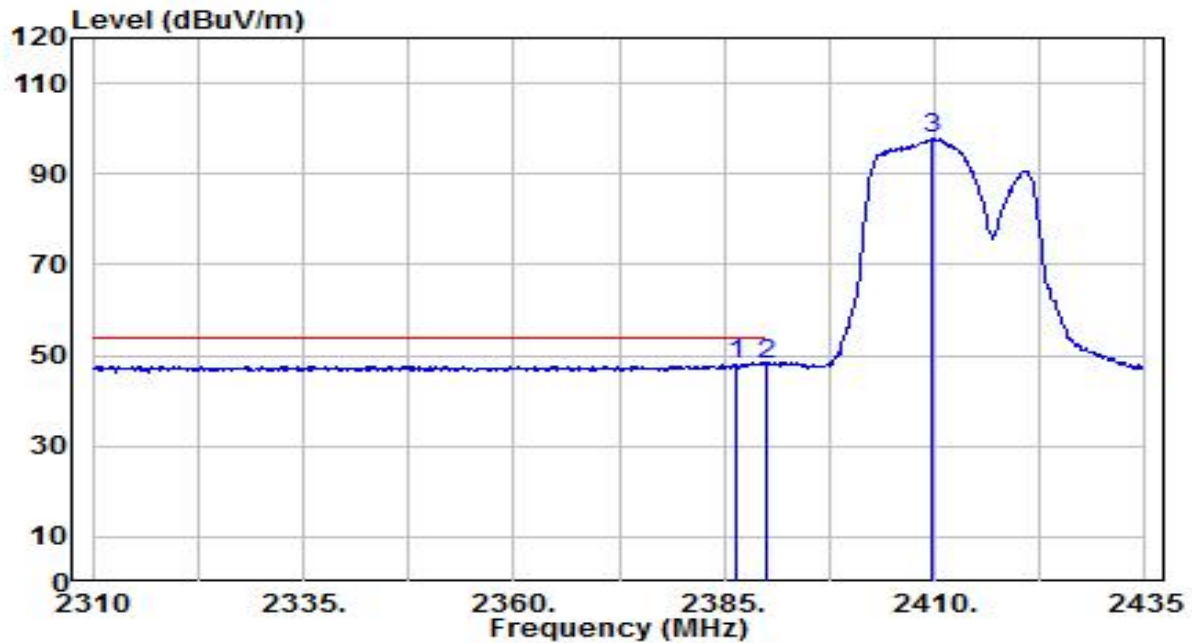


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.375	16.09	31.94	48.02	-5.98	54.00	135	45	Average
2		2390.000	15.91	31.95	47.86	-6.14	54.00	135	45	Average
3		2409.625	65.80	32.02	97.82	N/A	N/A	135	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

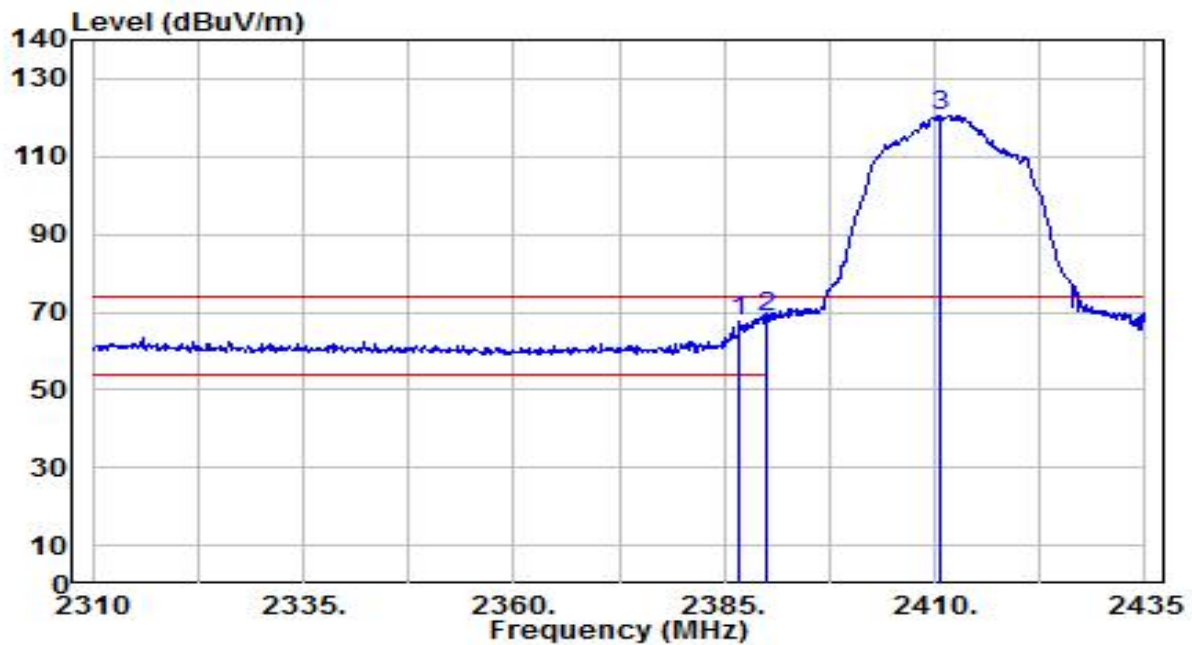


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.875	35.45	31.94	67.39	-6.61	74.00	100	325	Peak
2	* 2390.000	36.65	31.95	68.60	-5.40	74.00	100	325	Peak
3	2410.500	88.62	32.03	120.64	N/A	N/A	100	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

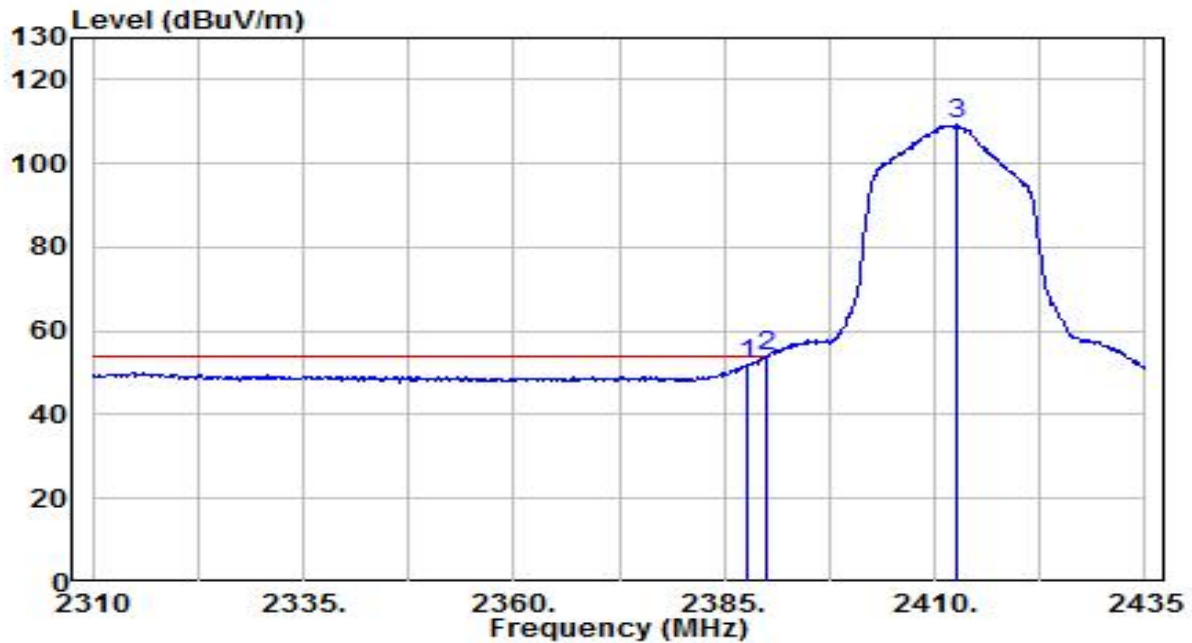


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	20.14	31.94	52.08	-1.92	54.00	100	325	Average
2	* 2390.000	21.79	31.95	53.74	-0.26	54.00	100	325	Average
3	2412.750	77.35	32.03	109.38	N/A	N/A	100	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

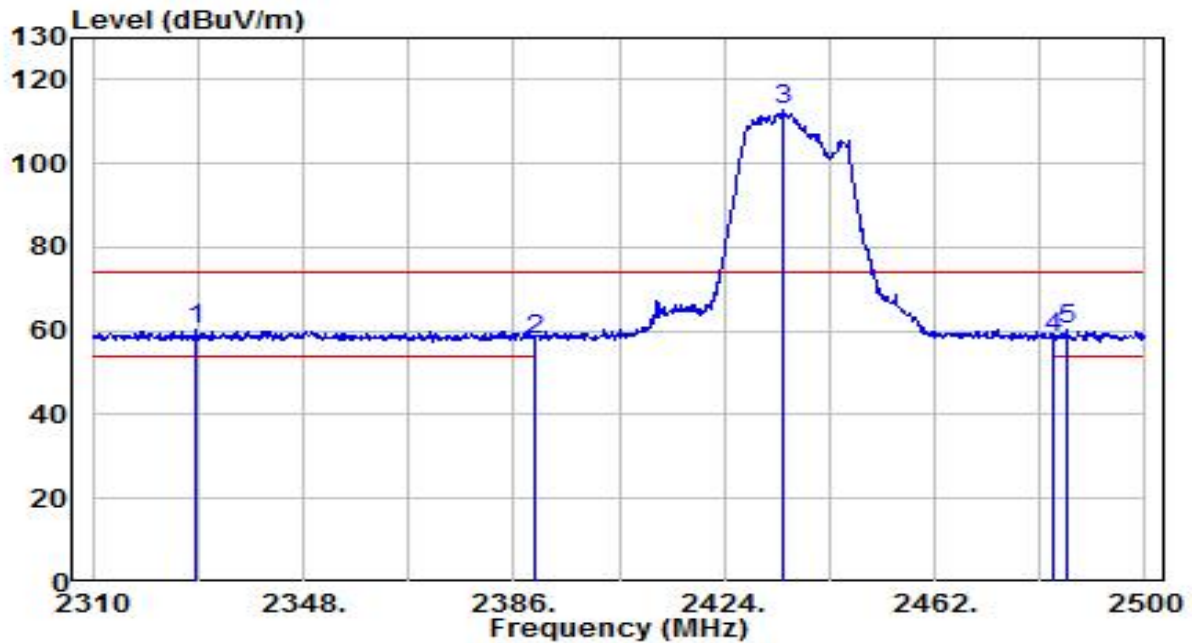


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2328.810	28.60	31.72	60.32	-13.68	74.00	165	45	Peak
2	2390.000	25.99	31.95	57.93	-16.07	74.00	165	45	Peak
3	2434.830	80.50	32.12	112.62	N/A	N/A	165	45	Peak
4	2483.500	26.24	32.30	58.54	-15.46	74.00	165	45	Peak
5	* 2485.750	28.11	32.31	60.42	-13.58	74.00	165	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

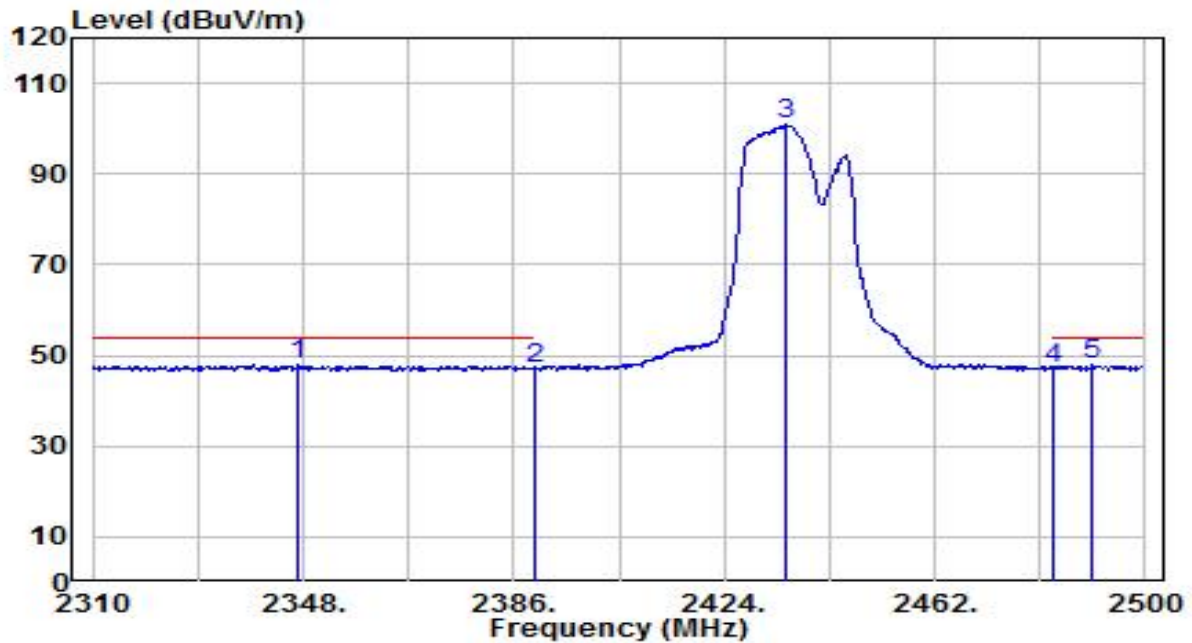


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2347.050	16.14	31.79	47.93	-6.07	54.00	165	45	Average
2		2390.000	15.20	31.95	47.15	-6.85	54.00	165	45	Average
3		2435.210	68.75	32.12	100.86	N/A	N/A	165	45	Average
4		2483.500	14.89	32.30	47.18	-6.82	54.00	165	45	Average
5		2490.310	15.55	32.32	47.87	-6.13	54.00	165	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

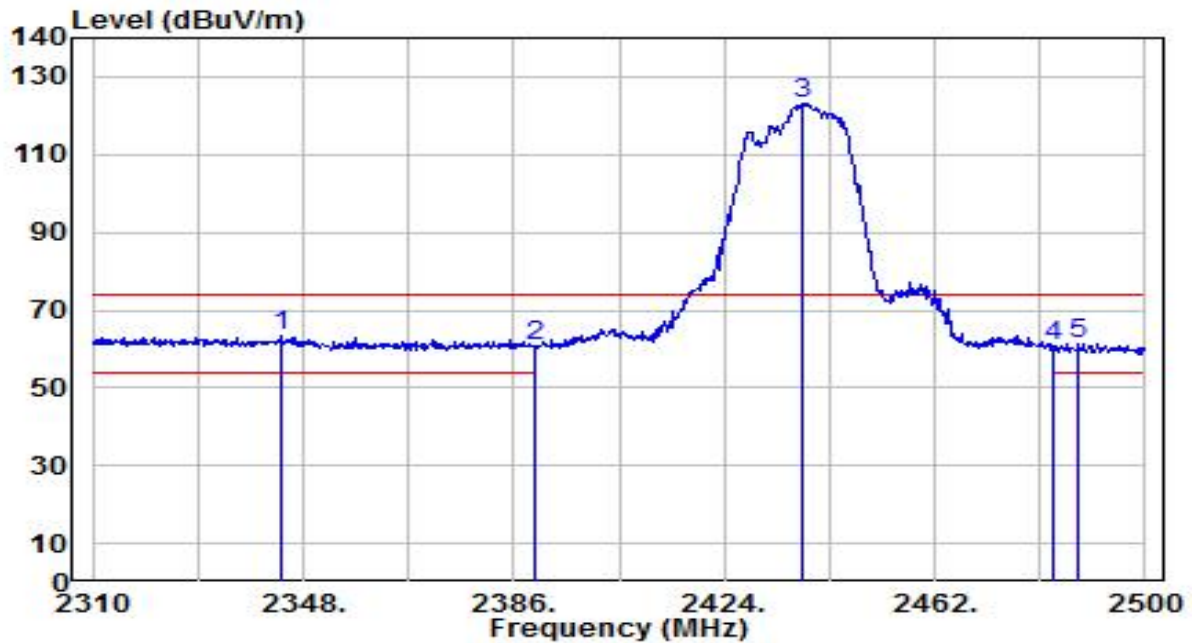


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2343.820	31.55	31.78	63.33	-10.67	74.00	140	150	Peak
2		2390.000	28.61	31.95	60.56	-13.44	74.00	140	150	Peak
3		2438.060	91.04	32.13	123.17	N/A	N/A	140	150	Peak
4		2483.500	28.50	32.30	60.80	-13.20	74.00	140	150	Peak
5		2488.030	29.15	32.32	61.47	-12.53	74.00	140	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

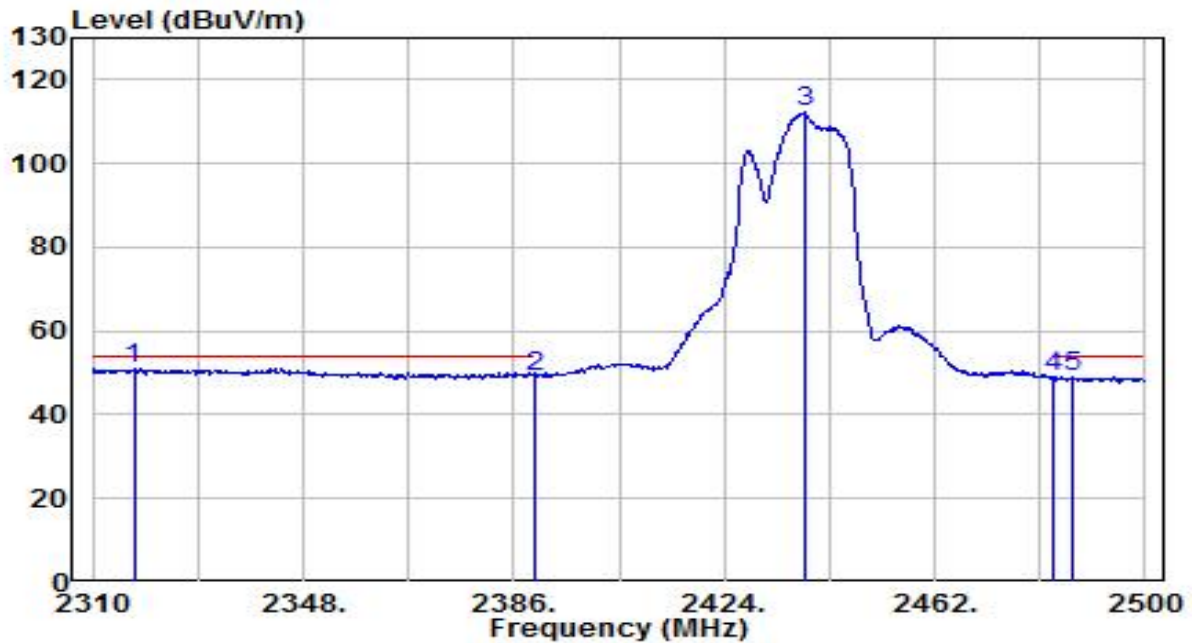


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2317.410	19.20	31.68	50.88	-3.12	54.00	140	150	Average
2		2390.000	17.27	31.95	49.21	-4.79	54.00	140	150	Average
3		2438.440	80.03	32.13	112.16	N/A	N/A	140	150	Average
4		2483.500	16.72	32.30	49.02	-4.98	54.00	140	150	Average
5		2486.700	16.57	32.31	48.88	-5.12	54.00	140	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

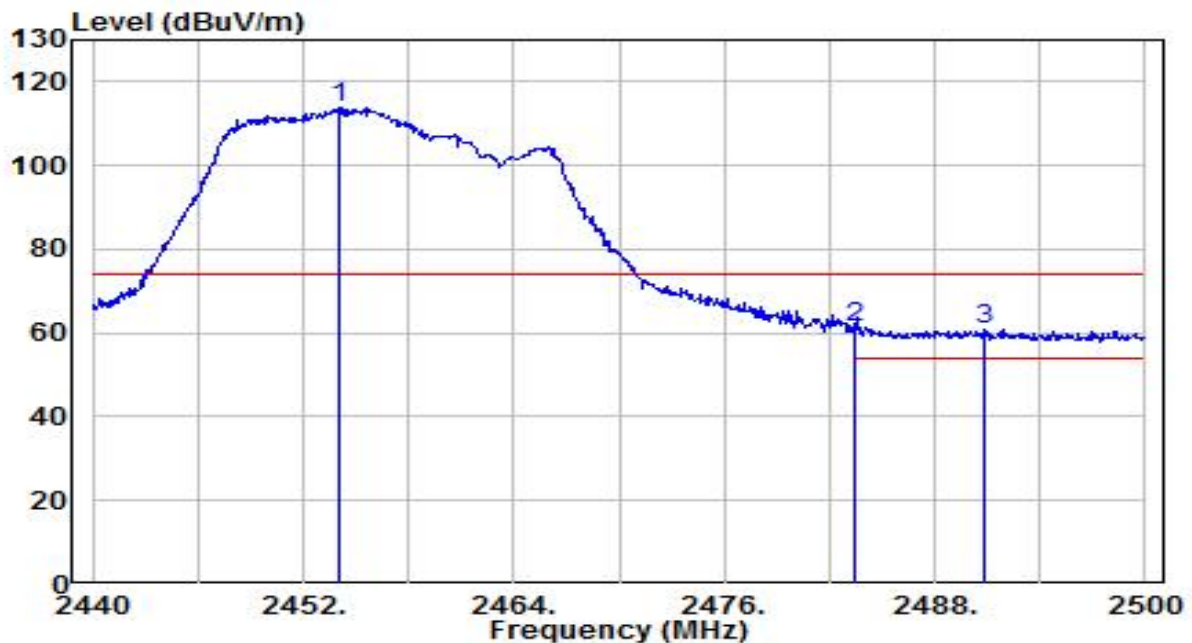


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.040	81.61	32.19	113.80	N/A	N/A	125	310	Peak
2	* 2483.500	28.82	32.30	61.12	-12.88	74.00	125	310	Peak
3	2490.760	28.31	32.33	60.63	-13.37	74.00	125	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

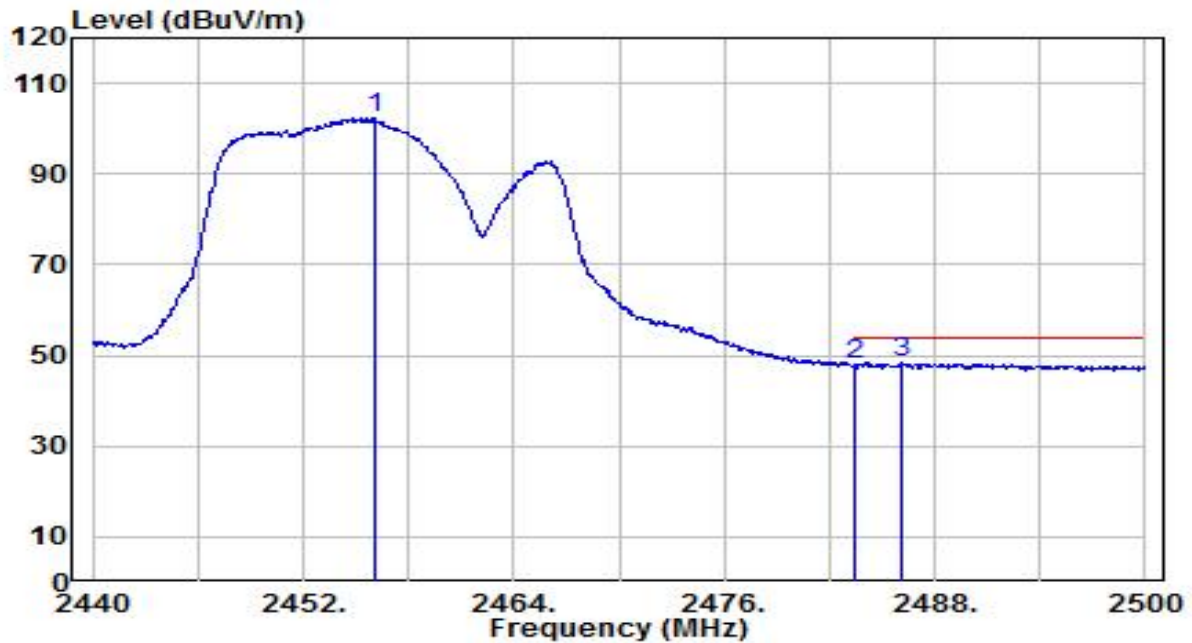


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.080	70.08	32.20	102.28	N/A	N/A	125	310	Average
2	2483.500	15.71	32.30	48.01	-5.99	54.00	125	310	Average
3	* 2486.080	15.97	32.31	48.27	-5.73	54.00	125	310	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

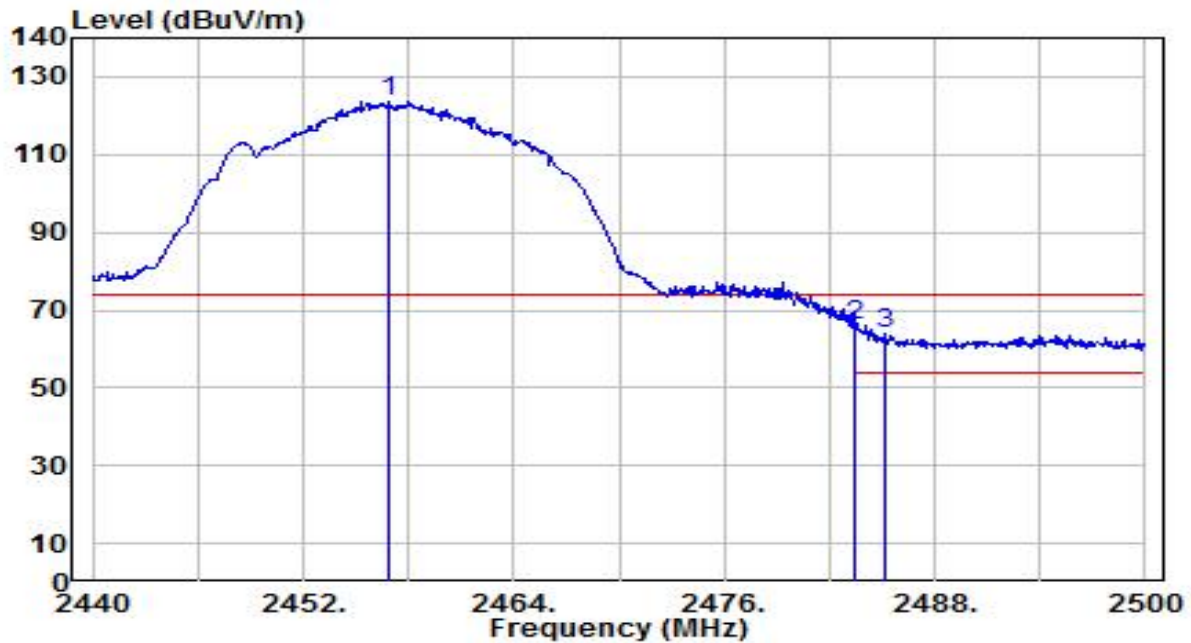

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.920	91.53	32.20	123.73	N/A	N/A	150	165	Peak
2	* 2483.500	33.59	32.30	65.89	-8.11	74.00	150	165	Peak
3	2485.240	31.43	32.30	63.73	-10.27	74.00	150	165	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1 with Vertical Ant	Test Voltage	By PoE




No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.060	79.90	32.20	112.10	N/A	N/A	150	165	Average
2	*	2483.500	19.67	32.30	51.96	-2.04	54.00	150	165	Average
3		2484.520	18.85	32.30	51.16	-2.84	54.00	150	165	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

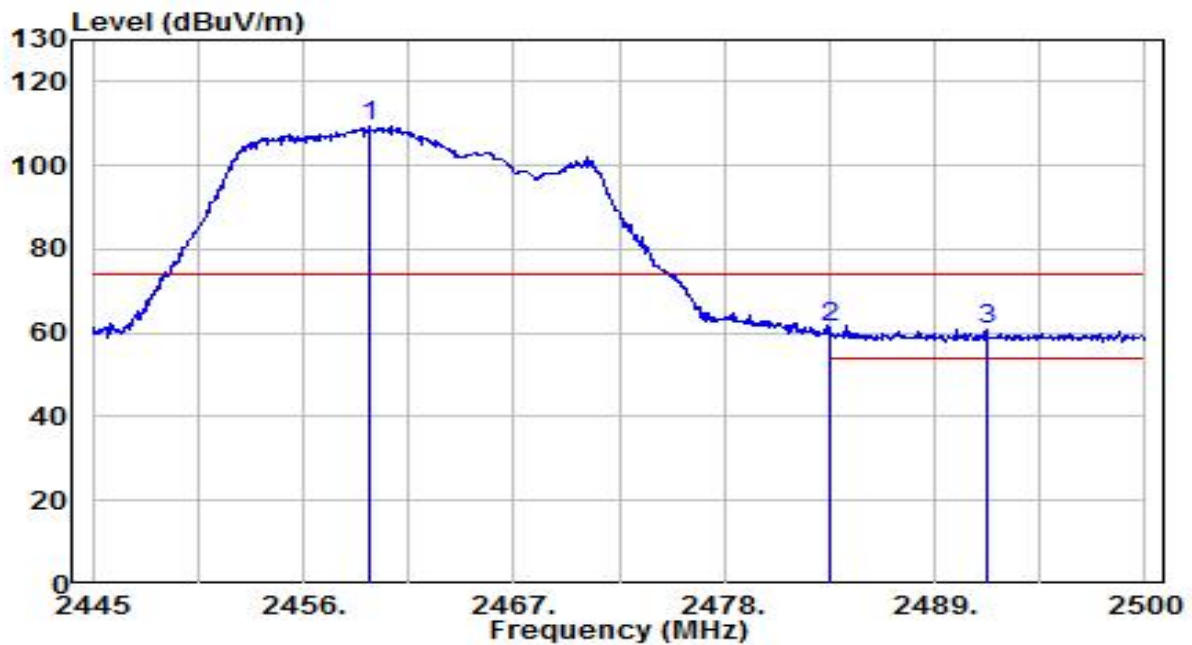


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.465	77.15	32.21	109.36	N/A	N/A	145	45	Peak
2	* 2483.500	28.91	32.30	61.20	-12.80	74.00	145	45	Peak
3	2491.750	28.38	32.33	60.71	-13.29	74.00	145	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

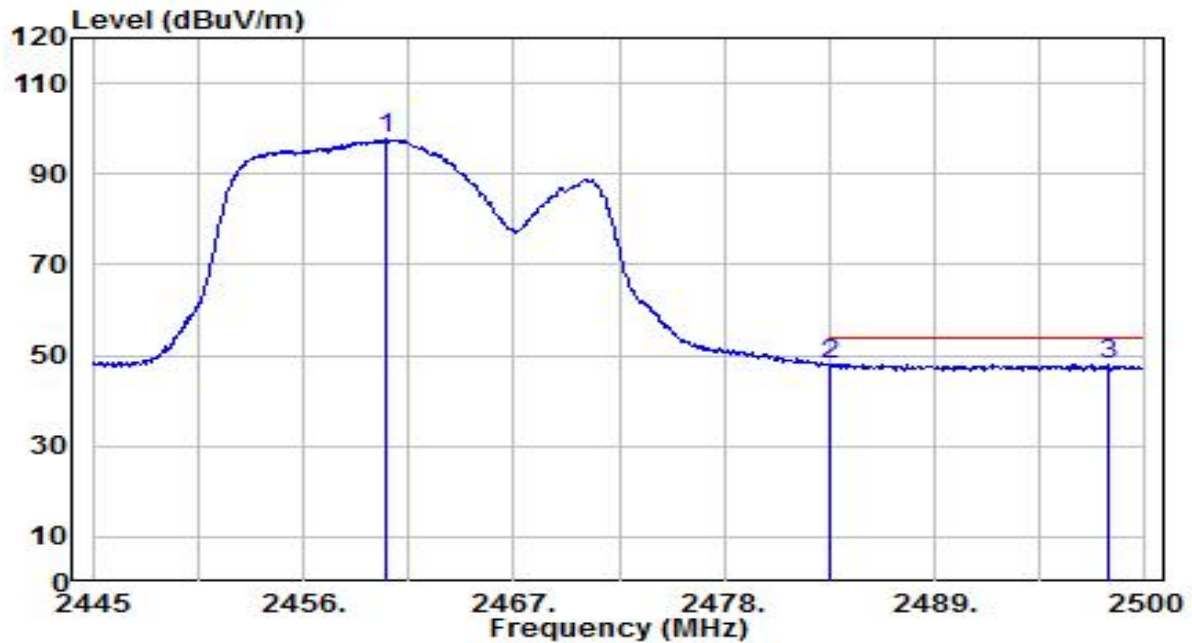


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.290	65.38	32.21	97.60	N/A	N/A	145	45	Average
2	* 2483.500	15.86	32.30	48.16	-5.84	54.00	145	45	Average
3	2498.020	15.65	32.35	48.01	-5.99	54.00	145	45	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

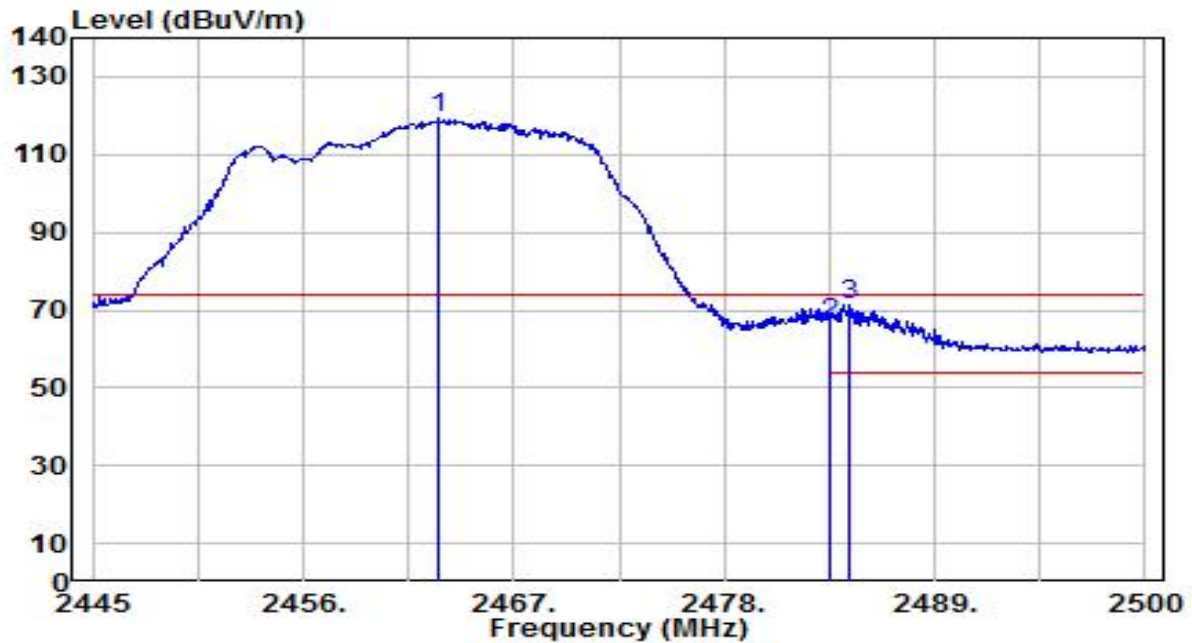

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.095	87.03	32.22	119.26	N/A	N/A	110	155	Peak
2	2483.500	34.21	32.30	66.51	-7.49	74.00	110	155	Peak
3	* 2484.545	39.10	32.30	71.41	-2.59	74.00	110	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1 with Vertical Ant	Test Voltage	By PoE




No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.095	75.66	32.22	107.88	N/A	N/A	110	155	Average
2	* 2483.500	21.46	32.30	53.76	-0.24	54.00	110	155	Average
3	2484.600	20.84	32.30	53.14	-0.86	54.00	110	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

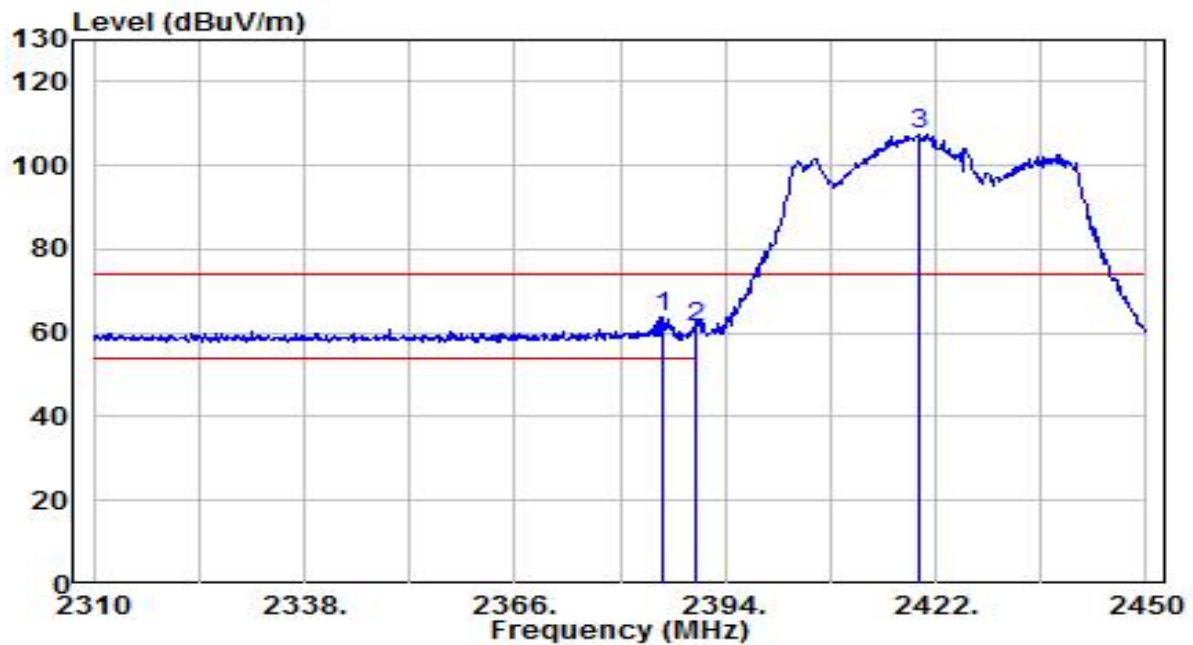


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.740	32.02	31.93	63.95	-10.05	74.00	165	310	Peak
2		2390.000	29.13	31.95	61.08	-12.92	74.00	165	310	Peak
3		2419.760	75.54	32.06	107.60	N/A	N/A	165	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

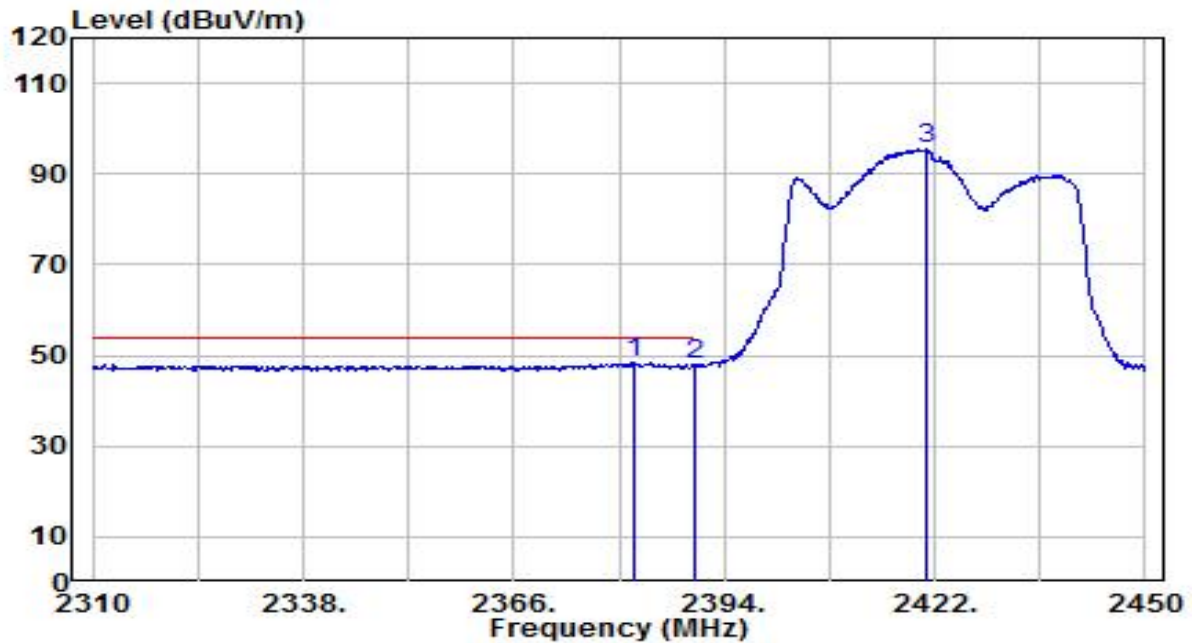


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.100	16.47	31.92	48.39	-5.61	54.00	165	310	Average
2		2390.000	16.04	31.95	47.99	-6.01	54.00	165	310	Average
3		2421.020	63.40	32.06	95.47	N/A	N/A	165	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

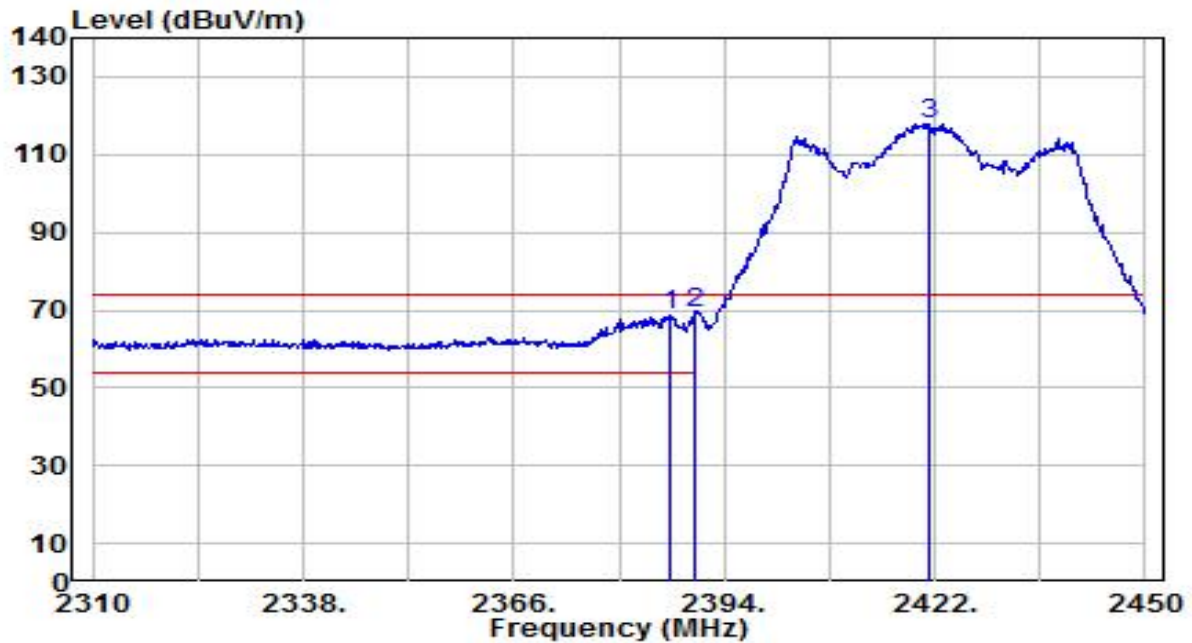


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.720	36.73	31.94	68.67	-5.33	74.00	145	165	Peak
2	*	2390.000	37.06	31.95	69.01	-4.99	74.00	145	165	Peak
3		2421.160	85.99	32.07	118.06	N/A	N/A	145	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

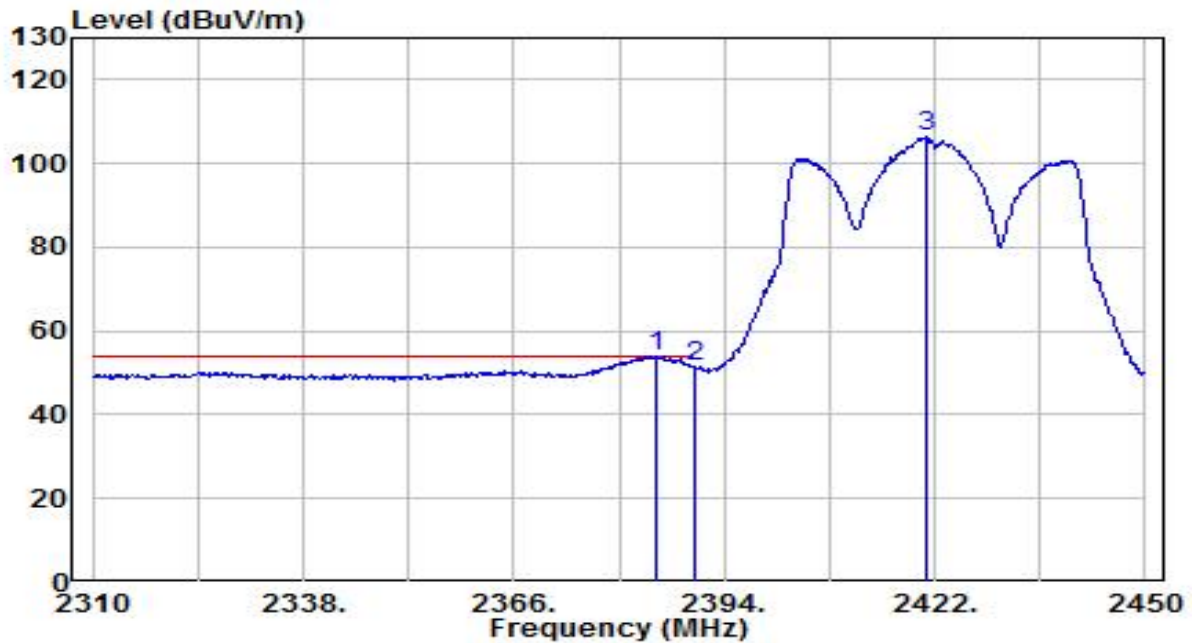


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.900	21.97	31.93	53.90	-0.10	54.00	145	165	Average
2		2390.000	19.57	31.95	51.52	-2.48	54.00	145	165	Average
3		2420.880	74.18	32.06	106.25	N/A	N/A	145	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 4_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

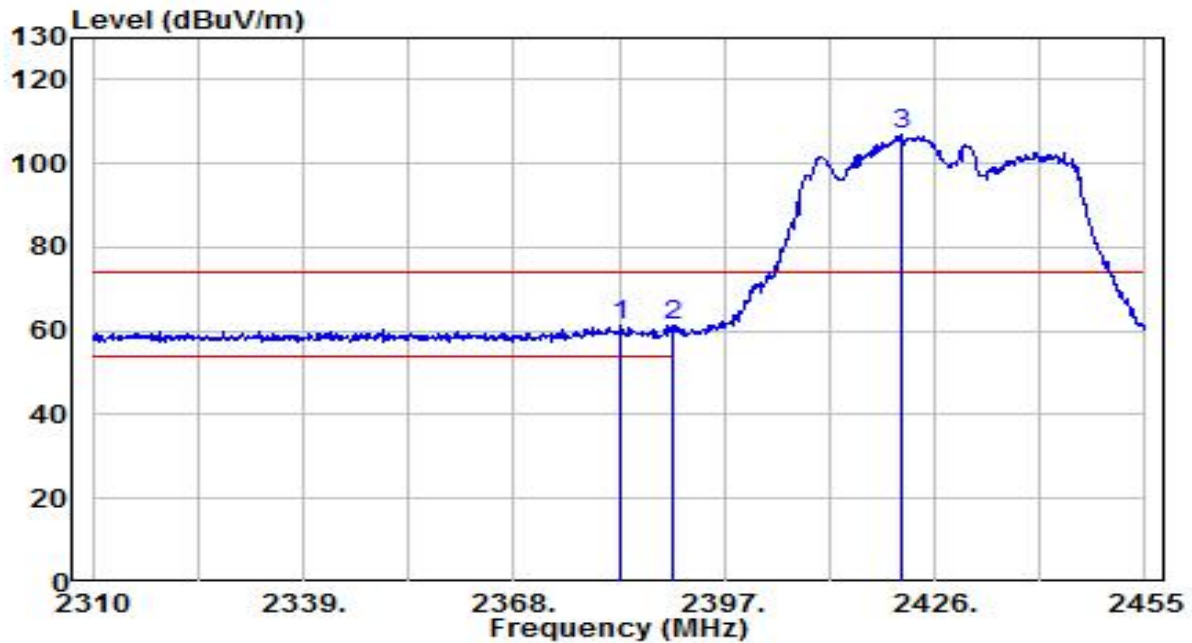


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.790	29.17	31.92	61.09	-12.91	74.00	215	35	Peak
2		2390.000	29.14	31.95	61.09	-12.91	74.00	215	35	Peak
3		2421.360	75.01	32.07	107.08	N/A	N/A	215	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 4_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

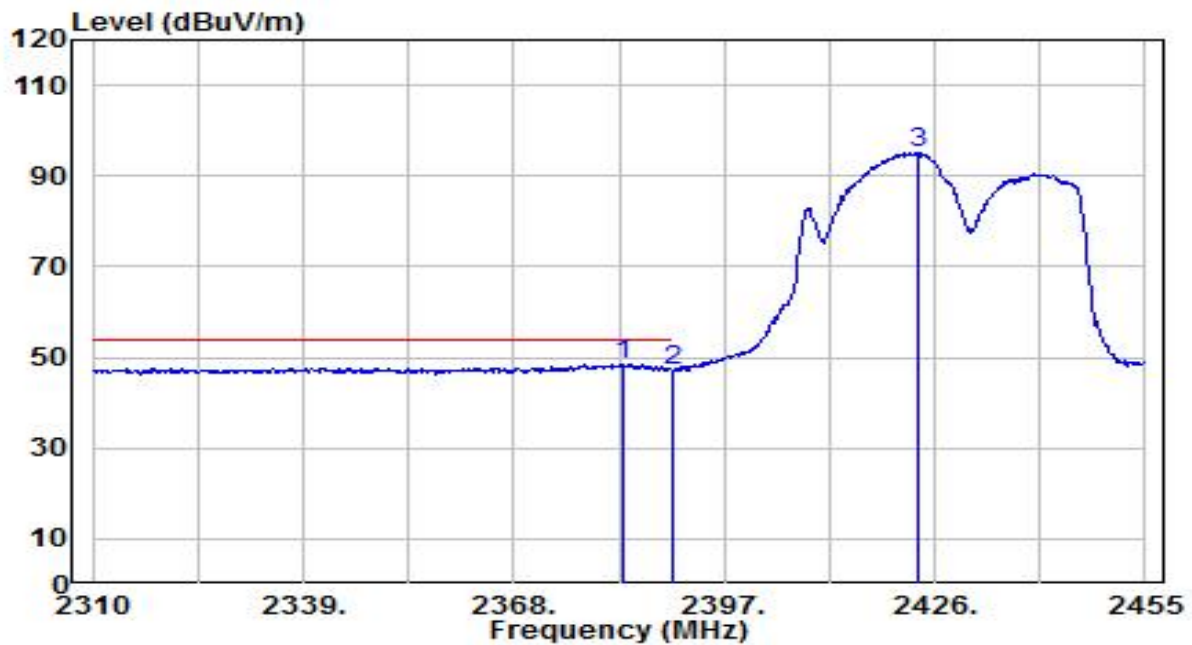


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.935	16.53	31.92	48.45	-5.55	54.00	215	35	Average
2		2390.000	15.33	31.95	47.28	-6.72	54.00	215	35	Average
3		2423.825	62.97	32.08	95.05	N/A	N/A	215	35	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 4_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

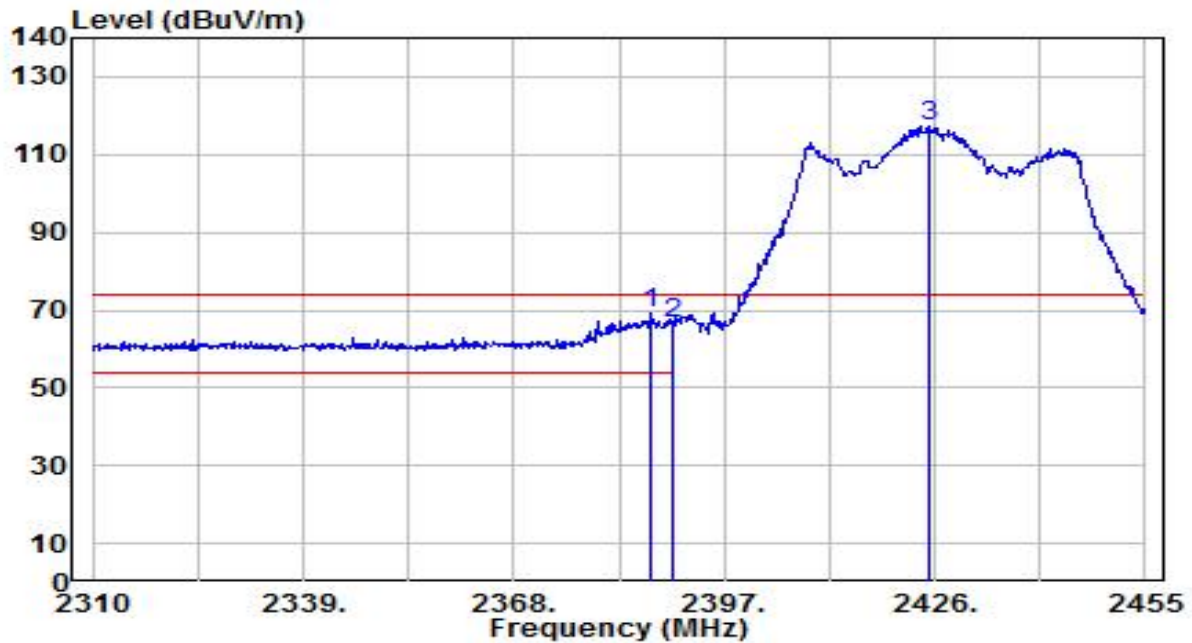


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.850	37.24	31.94	69.18	-4.82	74.00	135	325	Peak
2		2390.000	34.65	31.95	66.60	-7.40	74.00	135	325	Peak
3		2425.275	85.35	32.08	117.43	N/A	N/A	135	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 4_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

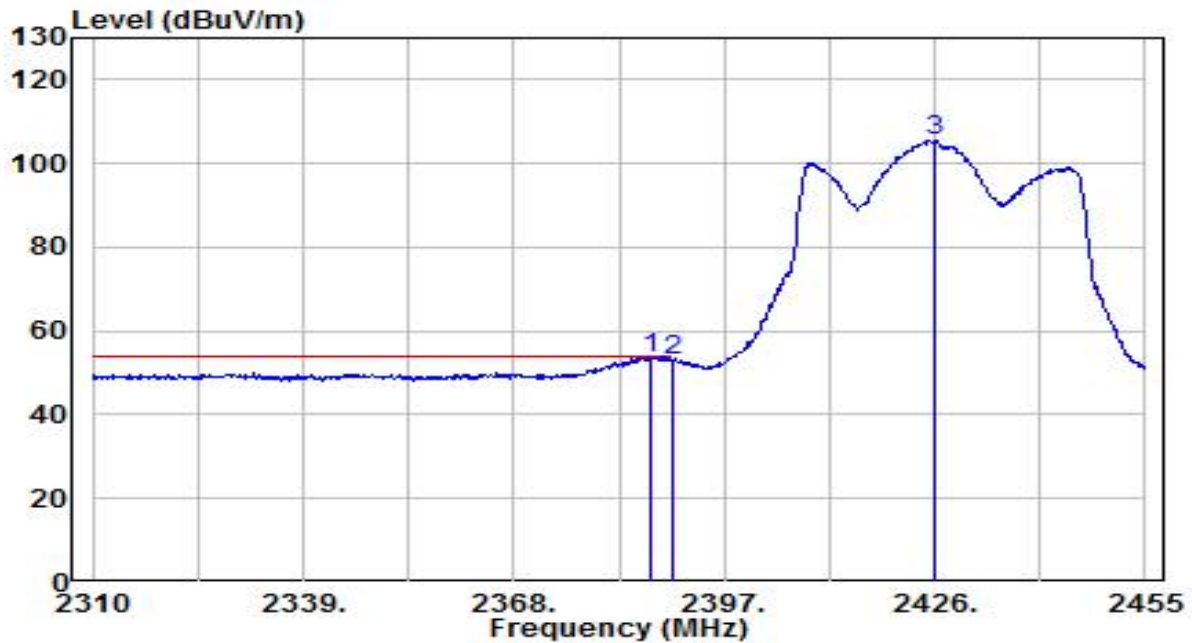


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.705	21.77	31.94	53.70	-0.30	54.00	135	325	Average
2		2390.000	21.20	31.95	53.15	-0.85	54.00	135	325	Average
3		2425.855	73.56	32.08	105.64	N/A	N/A	135	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

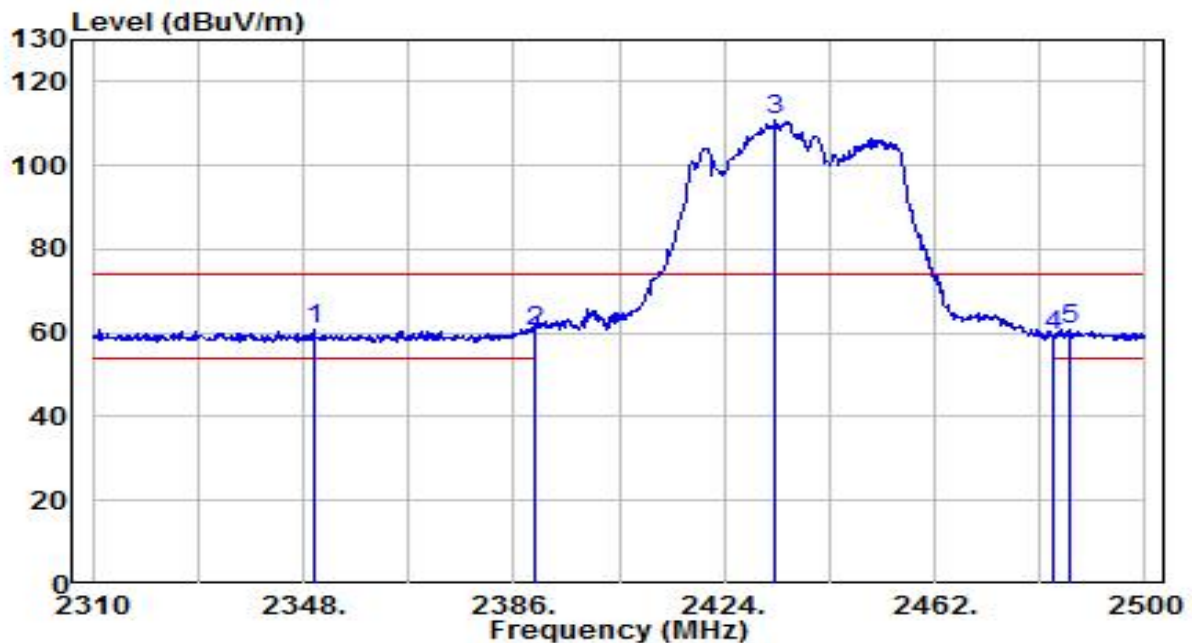


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2349.900	29.27	31.80	61.07	-12.93	74.00	150	50	Peak
2		2390.000	28.52	31.95	60.46	-13.54	74.00	150	50	Peak
3		2433.120	78.58	32.11	110.69	N/A	N/A	150	50	Peak
4		2483.500	26.97	32.30	59.27	-14.73	74.00	150	50	Peak
5		2486.320	28.40	32.31	60.70	-13.30	74.00	150	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

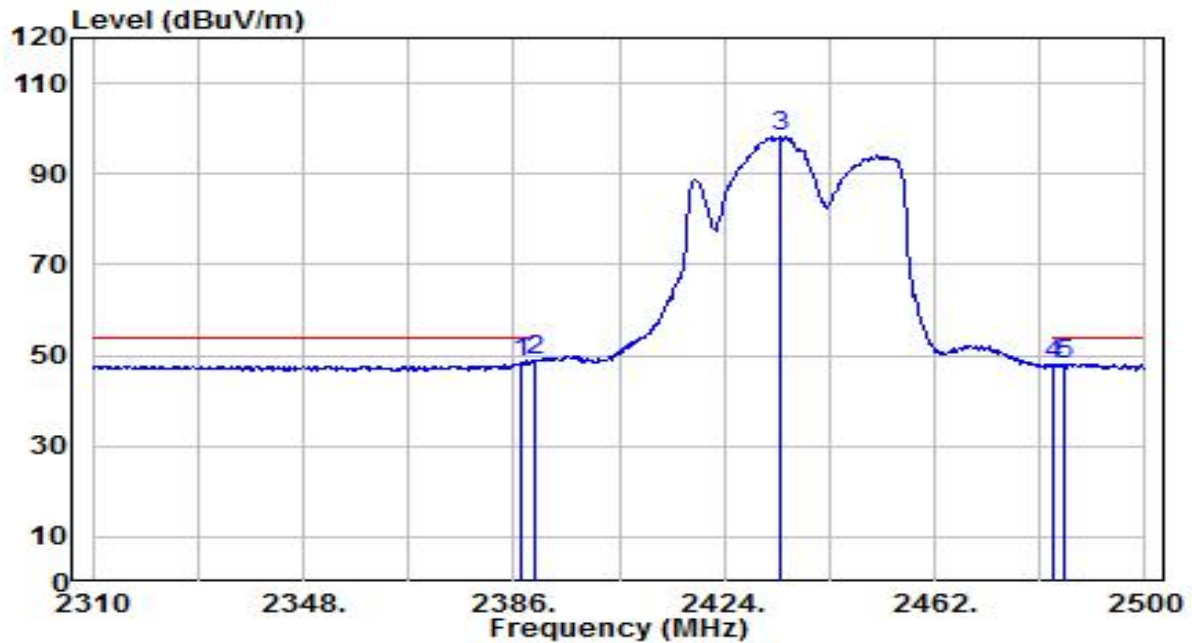


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	16.38	31.94	48.32	-5.68	54.00	150	50	Average
2	* 2390.000	16.88	31.95	48.83	-5.17	54.00	150	50	Average
3	2434.070	66.07	32.11	98.18	N/A	N/A	150	50	Average
4	2483.500	15.59	32.30	47.88	-6.12	54.00	150	50	Average
5	2485.560	15.88	32.31	48.19	-5.81	54.00	150	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

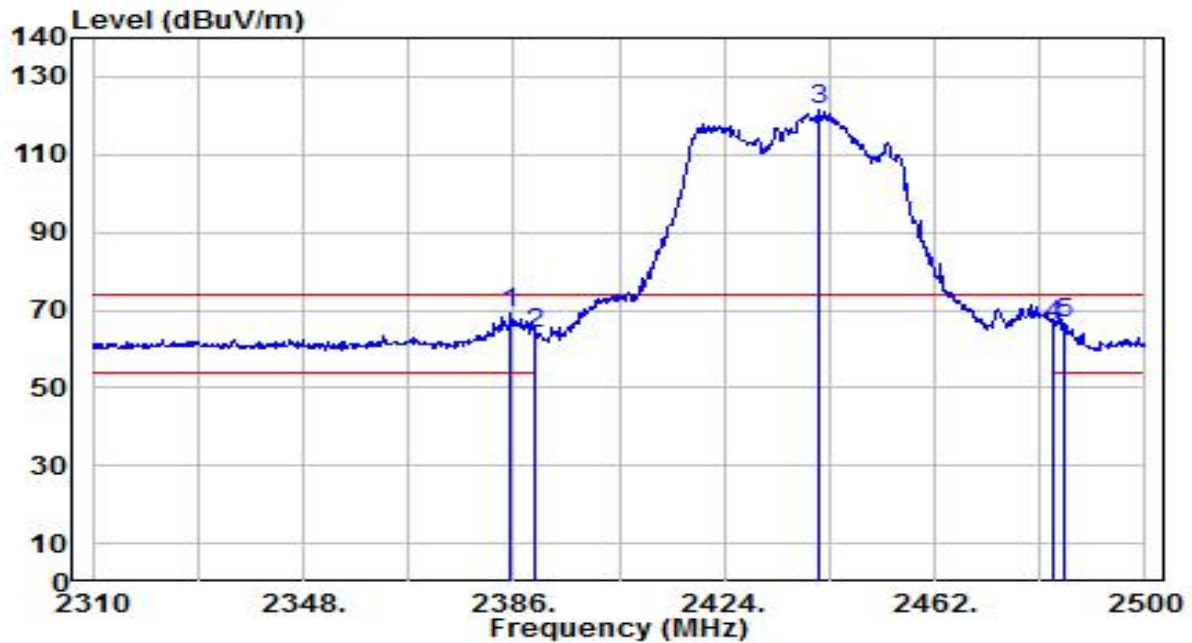


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.430	37.07	31.93	69.00	-5.00	74.00	130	155	Peak
2		2390.000	31.93	31.95	63.88	-10.12	74.00	130	155	Peak
3		2441.290	89.30	32.14	121.44	N/A	N/A	130	155	Peak
4		2483.500	33.93	32.30	66.23	-7.77	74.00	130	155	Peak
5		2485.180	34.10	32.30	66.40	-7.60	74.00	130	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

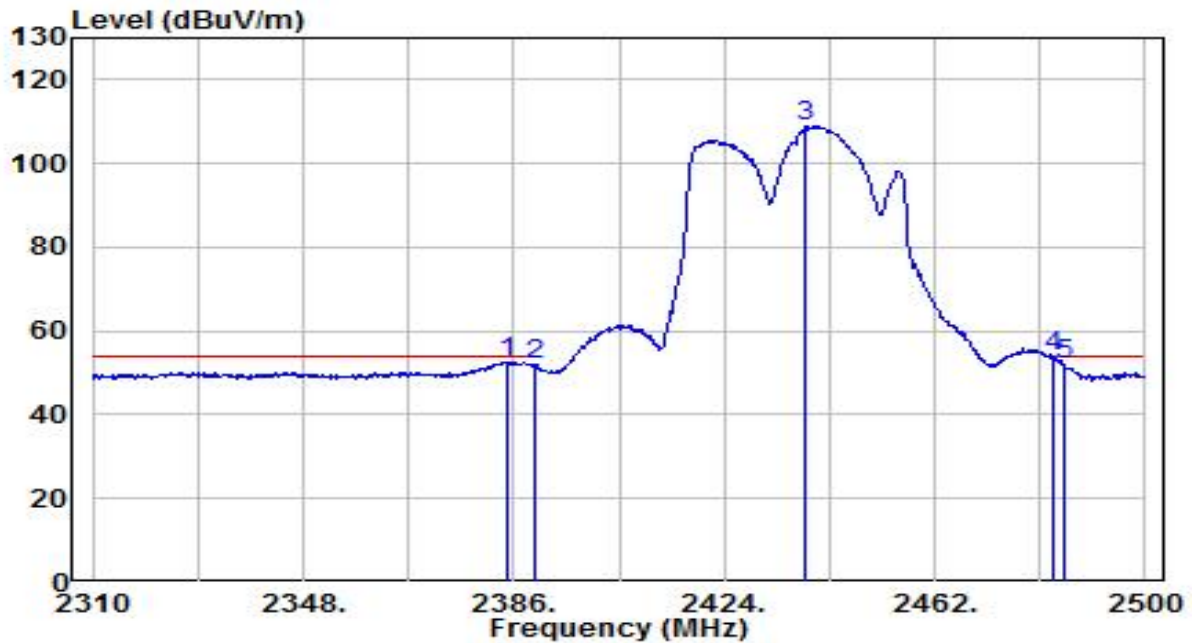


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.860	20.68	31.93	52.61	-1.39	54.00	130	155	Average
2	2390.000	19.85	31.95	51.80	-2.20	54.00	130	155	Average
3	2438.820	76.73	32.13	108.86	N/A	N/A	130	155	Average
4	* 2483.500	21.48	32.30	53.78	-0.22	54.00	130	155	Average
5	2485.180	19.92	32.30	52.22	-1.78	54.00	130	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 8_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

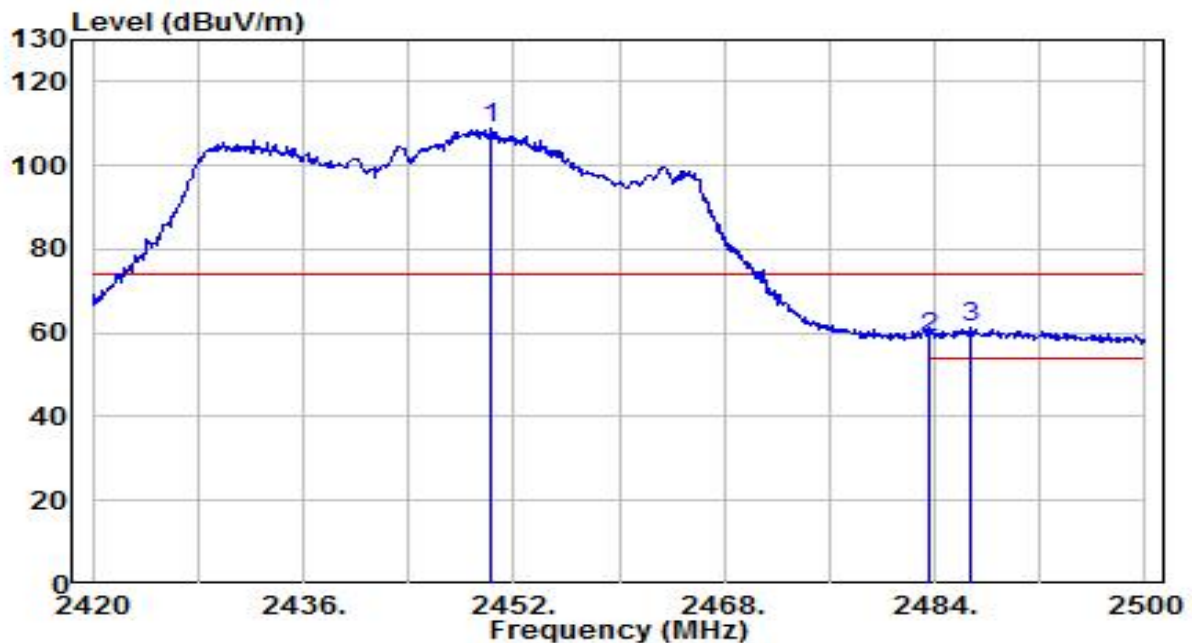


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.160	76.62	32.17	108.80	N/A	N/A	170	320	Peak
2	2483.500	26.36	32.30	58.66	-15.34	74.00	170	320	Peak
3	* 2486.640	28.94	32.31	61.25	-12.75	74.00	170	320	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 8_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

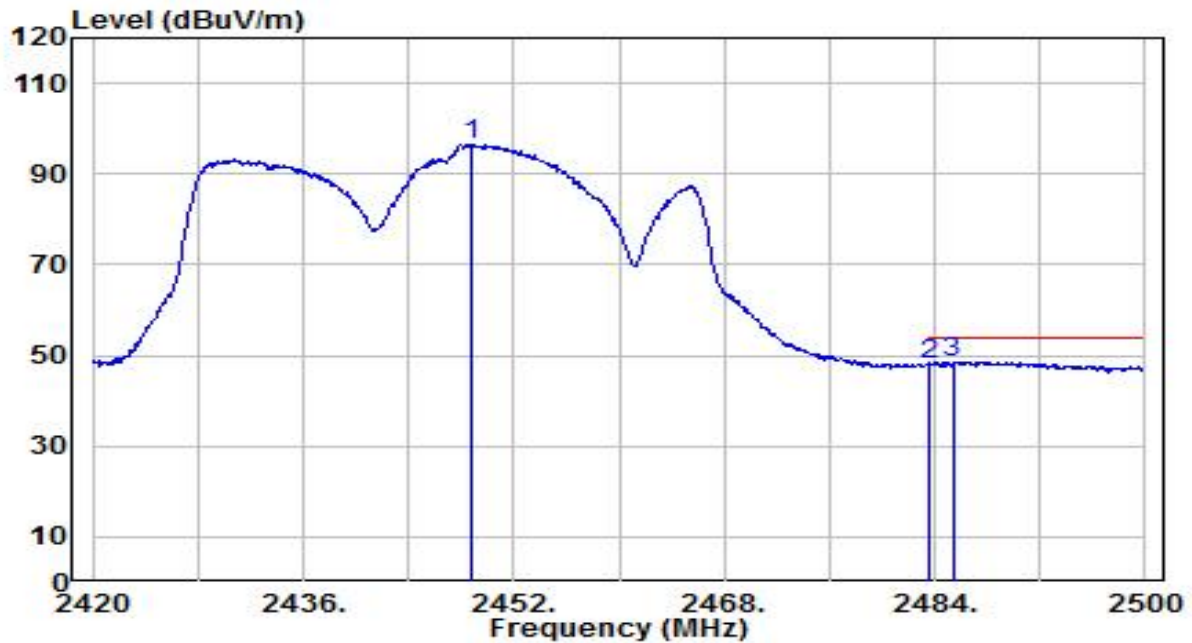


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.800	64.31	32.17	96.48	N/A	N/A	170	320	Average
2	2483.500	15.63	32.30	47.93	-6.07	54.00	170	320	Average
3	* 2485.360	16.32	32.31	48.62	-5.38	54.00	170	320	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 8_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

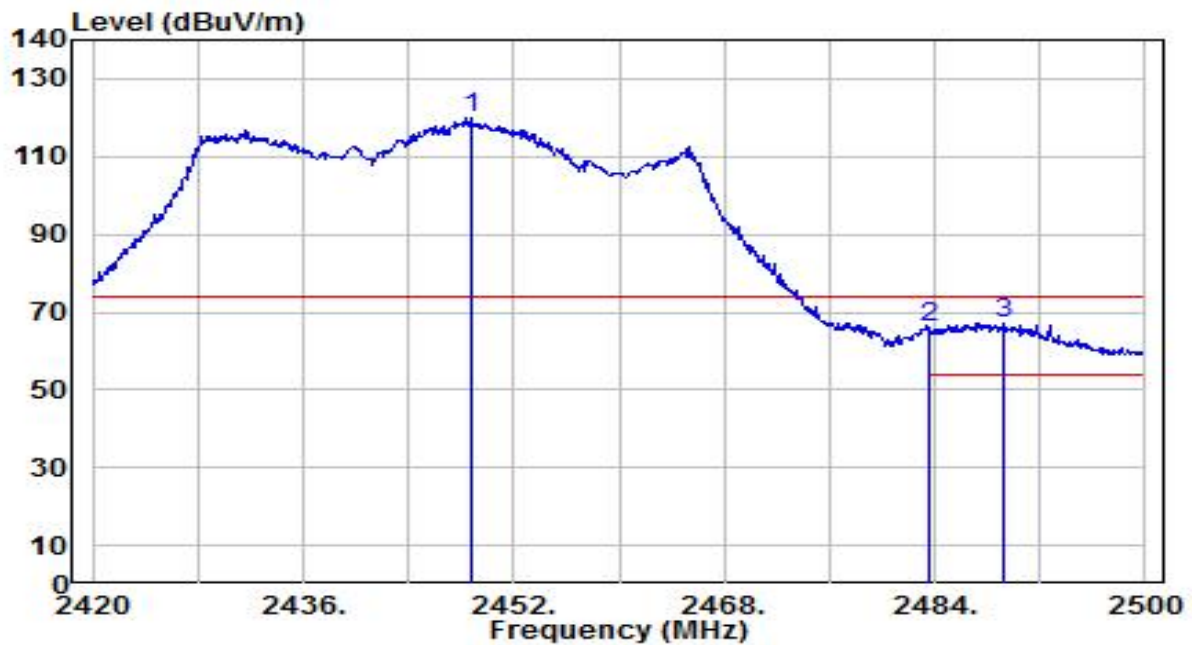


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.720	87.55	32.17	119.72	N/A	N/A	130	150	Peak
2	2483.500	33.52	32.30	65.82	-8.18	74.00	130	150	Peak
3	* 2489.280	34.95	32.32	67.27	-6.73	74.00	130	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 8_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

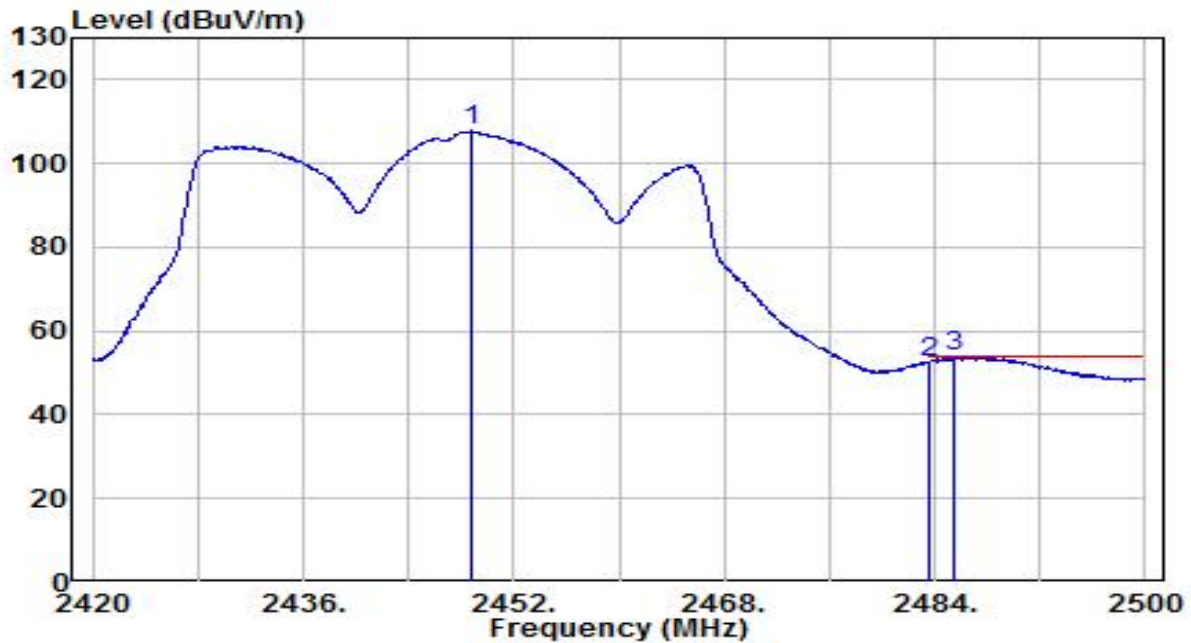


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.800	75.56	32.17	107.73	N/A	N/A	130	150	Average
2	2483.500	20.39	32.30	52.69	-1.31	54.00	130	150	Average
3	* 2485.440	21.43	32.31	53.74	-0.26	54.00	130	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

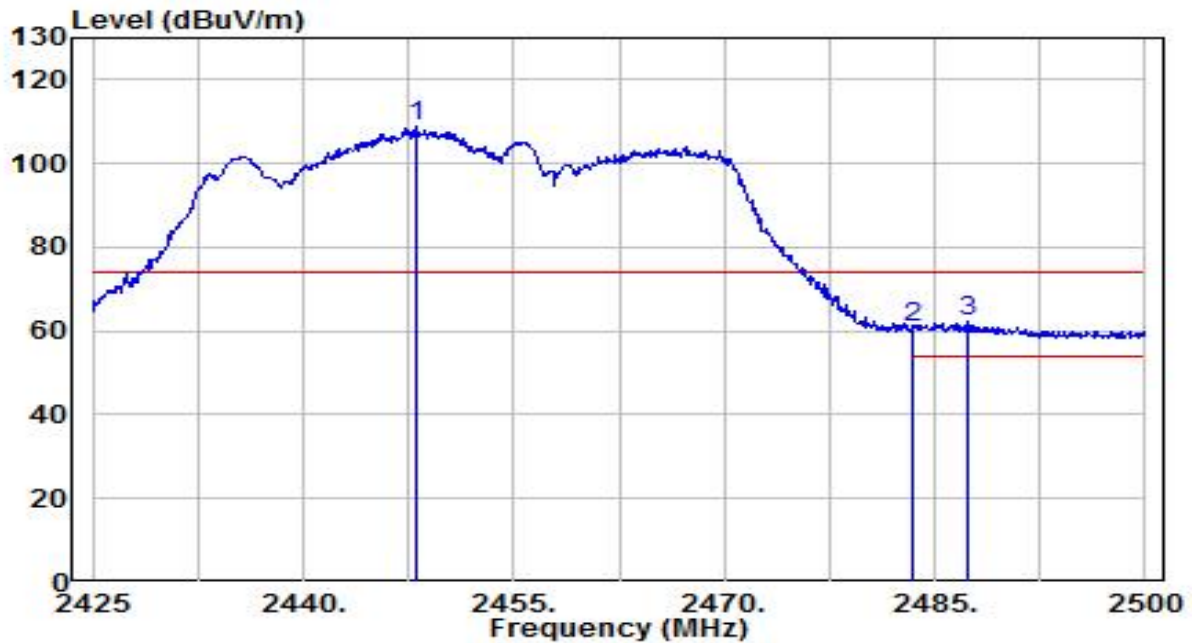


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.100	76.65	32.17	108.82	N/A	N/A	135	315	Peak
2	2483.500	28.39	32.30	60.69	-13.31	74.00	135	315	Peak
3	* 2487.325	29.82	32.31	62.13	-11.87	74.00	135	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

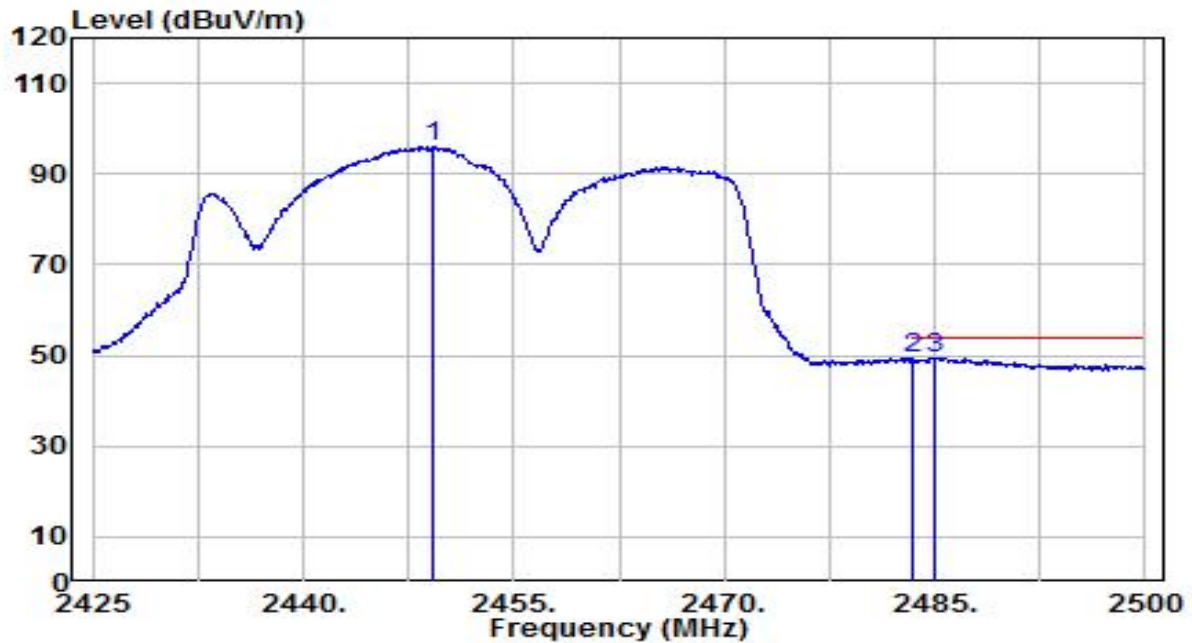


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.150	63.95	32.17	96.12	N/A	N/A	135	315	Average
2	2483.500	17.00	32.30	49.30	-4.70	54.00	135	315	Average
3	* 2484.925	17.26	32.30	49.56	-4.44	54.00	135	315	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

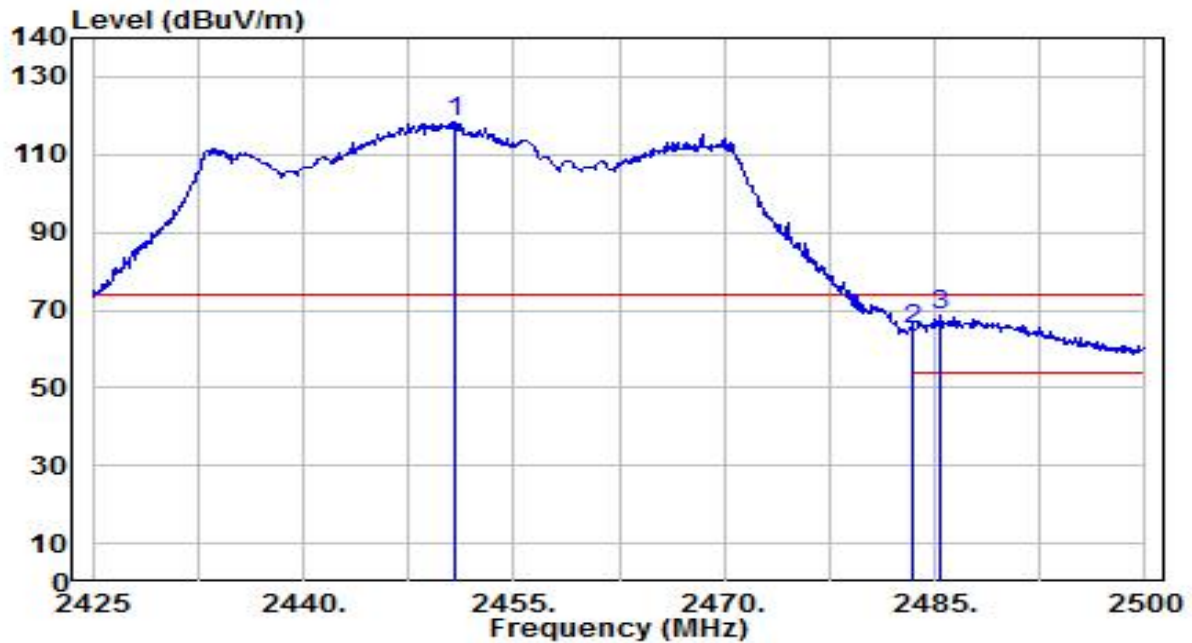


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.875	86.39	32.18	118.57	N/A	N/A	170	160	Peak
2	2483.500	32.69	32.30	64.99	-9.01	74.00	170	160	Peak
3	* 2485.450	36.39	32.31	68.70	-5.30	74.00	170	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-25
Factor	BBHA 9120D	Temp. / Humidity	26°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1 with Vertical Ant	Test Voltage	By PoE

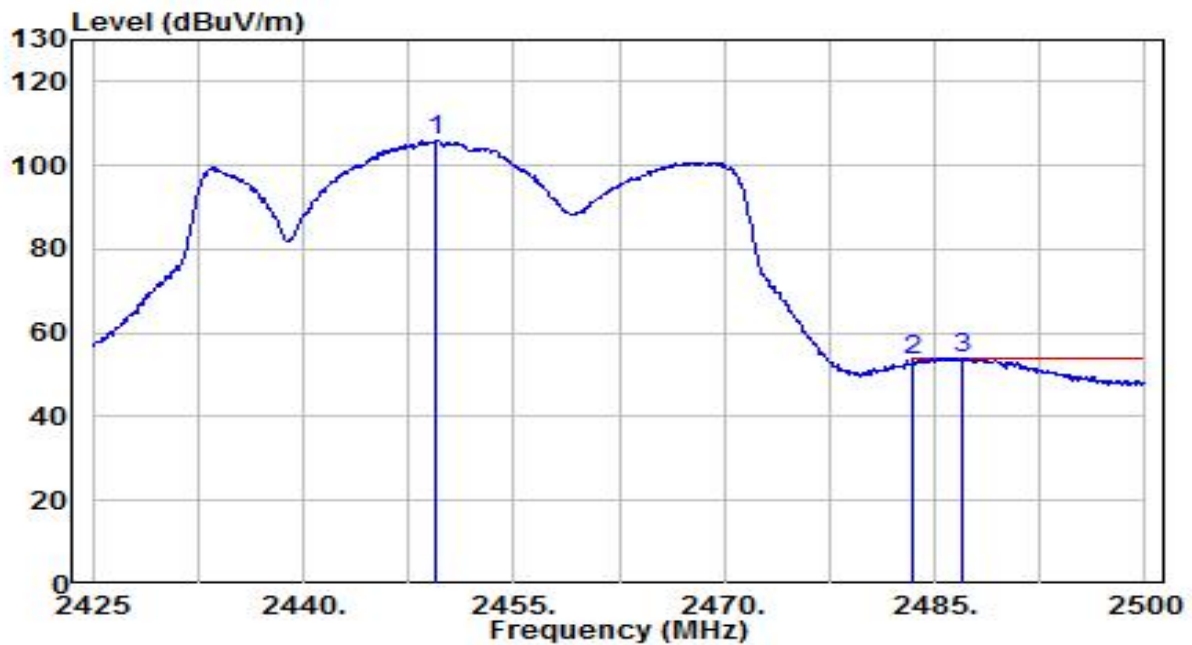

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.450	73.84	32.17	106.01	N/A	N/A	170	160	Average
2	2483.500	20.99	32.30	53.29	-0.71	54.00	170	160	Average
3	* 2486.875	21.56	32.31	53.87	-0.13	54.00	170	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

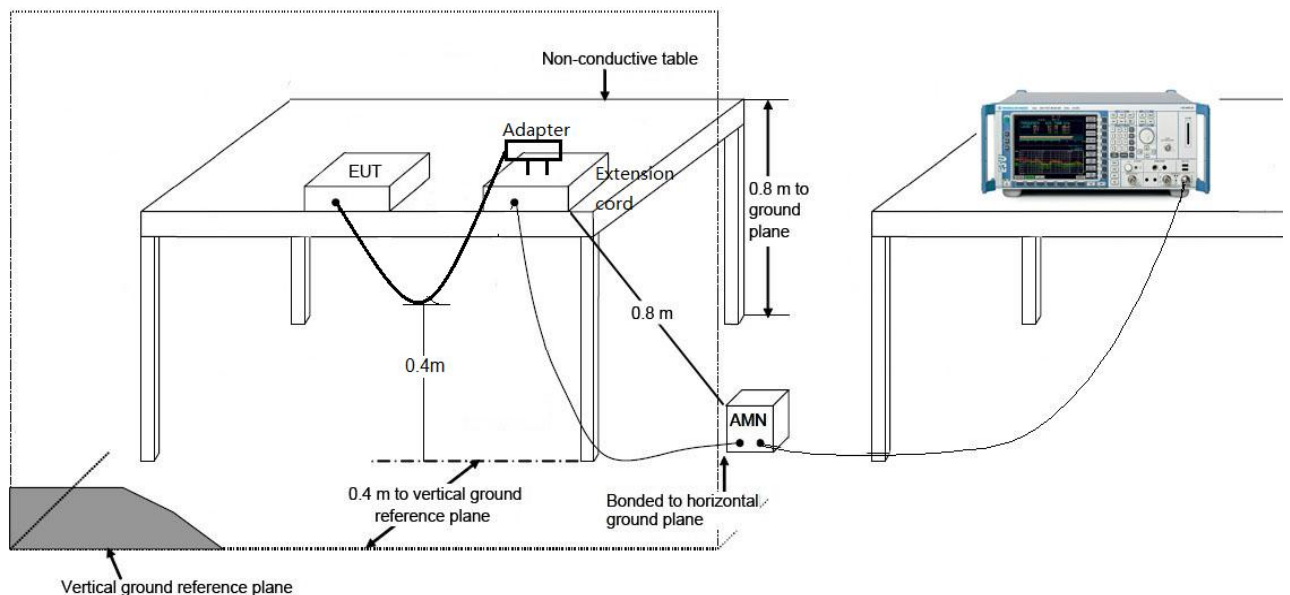

7.8.3. Test Result

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1_Ant H	Test Voltage	AC 120V/60Hz

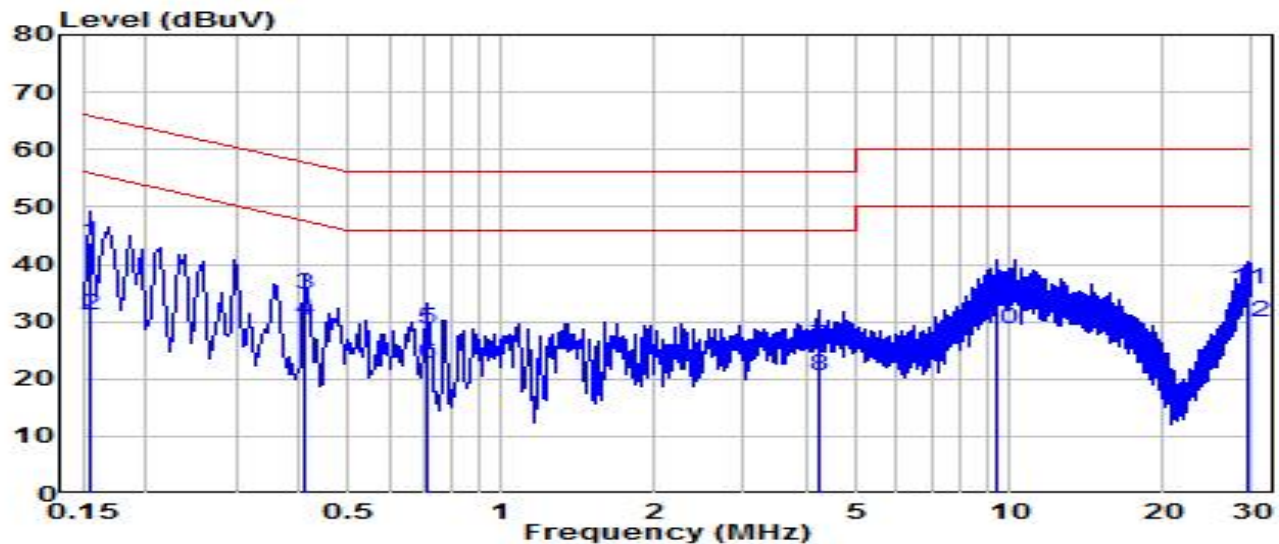


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	34.27	9.63	43.90	-21.86	65.75	QP
2	0.154	21.36	9.63	30.99	-24.76	55.75	Average
3	* 0.411	25.20	9.65	34.85	-22.78	57.63	QP
4	* 0.411	20.54	9.65	30.18	-17.44	47.63	Average
5	0.712	19.15	9.66	28.81	-27.19	56.00	QP
6	0.712	12.93	9.66	22.59	-23.41	46.00	Average
7	4.240	15.99	9.73	25.73	-30.27	56.00	QP
8	4.240	10.75	9.73	20.48	-25.52	46.00	Average
9	9.491	24.34	9.86	34.20	-25.80	60.00	QP
10	9.491	18.79	9.86	28.65	-21.35	50.00	Average
11	29.483	25.65	9.93	35.58	-24.42	60.00	QP
12	29.483	20.07	9.93	30.00	-20.00	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1_Ant H	Test Voltage	AC 120V/60Hz

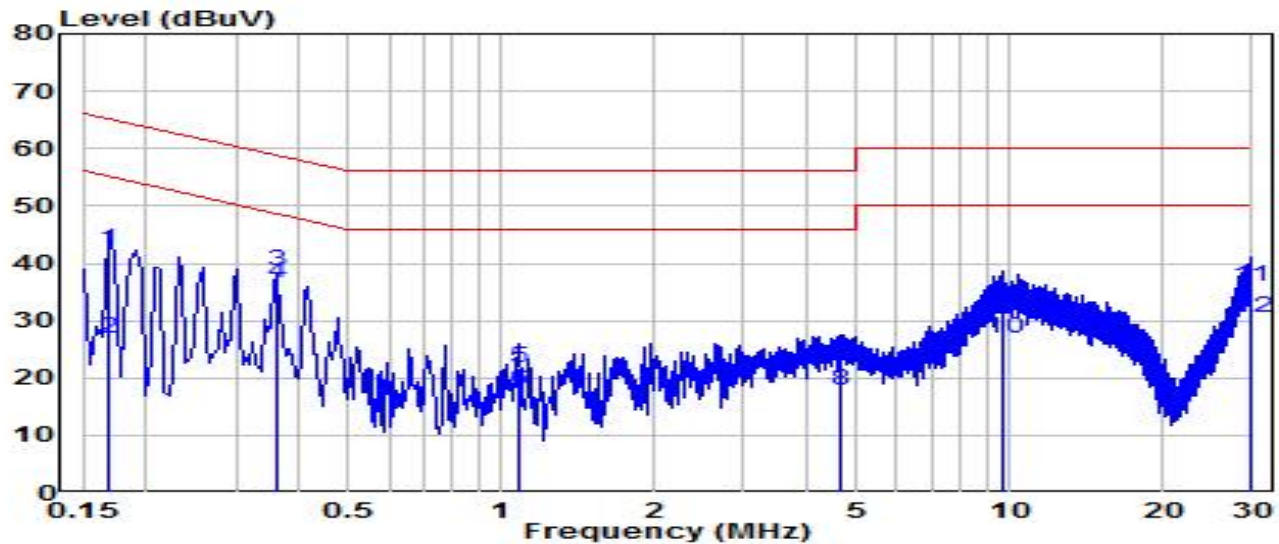


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	32.54	9.63	42.17	-22.88	65.06	QP
2	0.168	17.20	9.63	26.83	-28.23	55.06	Average
3	* 0.361	29.03	9.64	38.67	-20.02	58.69	QP
4	* 0.361	26.85	9.64	36.50	-12.20	48.69	Average
5	1.081	12.07	9.68	21.75	-34.25	56.00	QP
6	1.081	8.25	9.68	17.93	-28.07	46.00	Average
7	4.654	13.03	9.75	22.78	-33.22	56.00	QP
8	4.654	8.16	9.75	17.92	-28.08	46.00	Average
9	9.685	22.68	9.88	32.56	-27.44	60.00	QP
10	9.685	17.01	9.88	26.90	-23.10	50.00	Average
11	29.775	25.97	10.06	36.03	-23.97	60.00	QP
12	29.775	20.54	10.06	30.60	-19.40	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1_Ant H	Test Voltage	AC 240V/60Hz

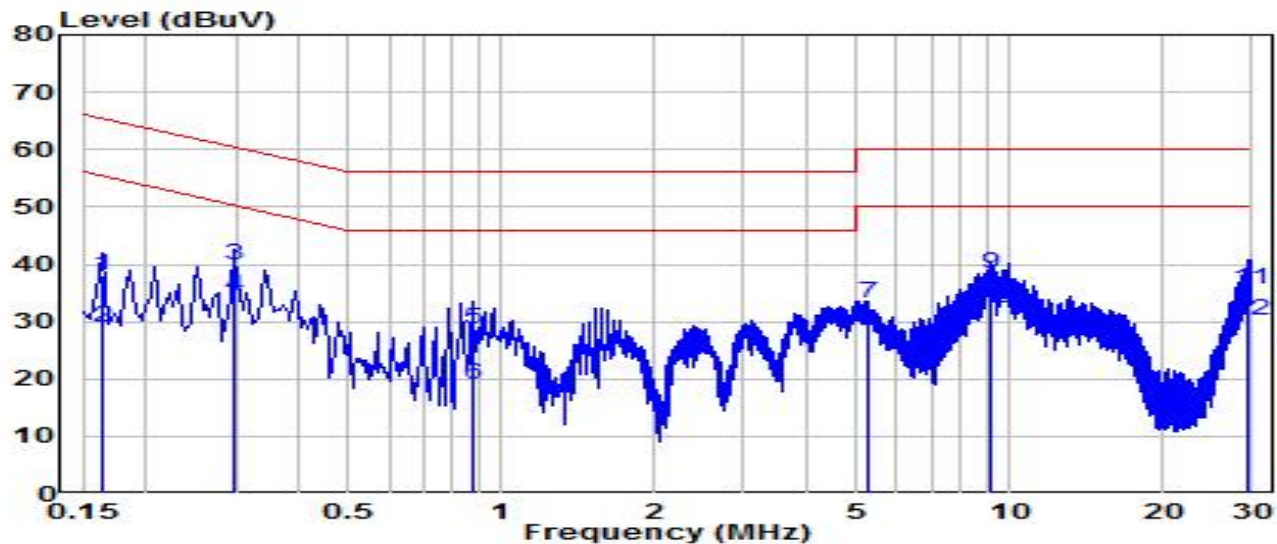


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	28.42	9.63	38.05	-27.23	65.28	QP
2	0.163	19.48	9.63	29.11	-26.18	55.28	Average
3	* 0.298	30.24	9.64	39.88	-20.40	60.28	QP
4	* 0.298	24.91	9.64	34.55	-15.73	50.28	Average
5	0.879	19.01	9.67	28.68	-27.32	56.00	QP
6	0.879	9.30	9.67	18.97	-27.03	46.00	Average
7	5.252	23.42	9.75	33.17	-26.83	60.00	QP
8	5.252	18.56	9.75	28.32	-21.68	50.00	Average
9	9.194	28.41	9.85	38.26	-21.74	60.00	QP
10	9.194	22.55	9.85	32.40	-17.60	50.00	Average
11	29.631	25.62	9.93	35.54	-24.46	60.00	QP
12	29.631	20.15	9.93	30.08	-19.92	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1_Ant H	Test Voltage	AC 240V/60Hz

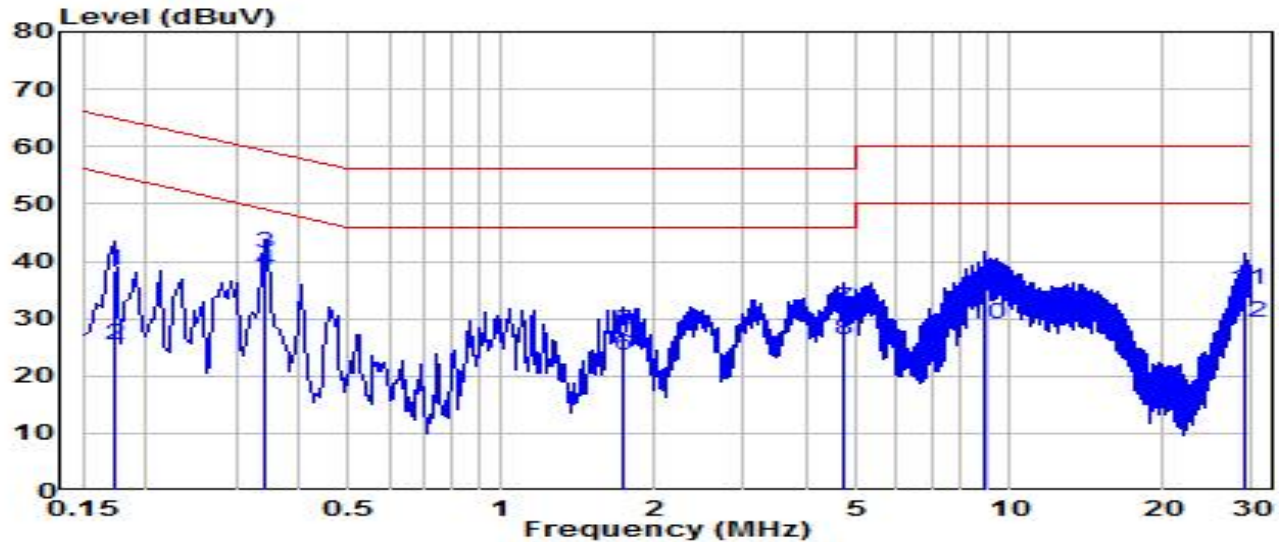


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	28.73	9.63	38.36	-26.48	64.84	QP
2	0.172	15.79	9.63	25.42	-29.41	54.84	Average
3	* 0.343	31.76	9.64	41.40	-17.71	59.12	QP
4	* 0.343	28.77	9.64	38.41	-10.71	49.12	Average
5	1.734	18.17	9.70	27.88	-28.12	56.00	QP
6	1.734	13.80	9.70	23.50	-22.50	46.00	Average
7	4.744	21.97	9.75	31.72	-24.28	56.00	QP
8	4.744	16.52	9.75	26.28	-19.72	46.00	Average
9	8.956	25.38	9.86	35.24	-24.76	60.00	QP
10	8.956	19.17	9.86	29.03	-20.97	50.00	Average
11	29.136	24.84	10.05	34.89	-25.11	60.00	QP
12	29.136	19.34	10.05	29.39	-20.61	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1_Ant V	Test Voltage	AC 120V/60Hz

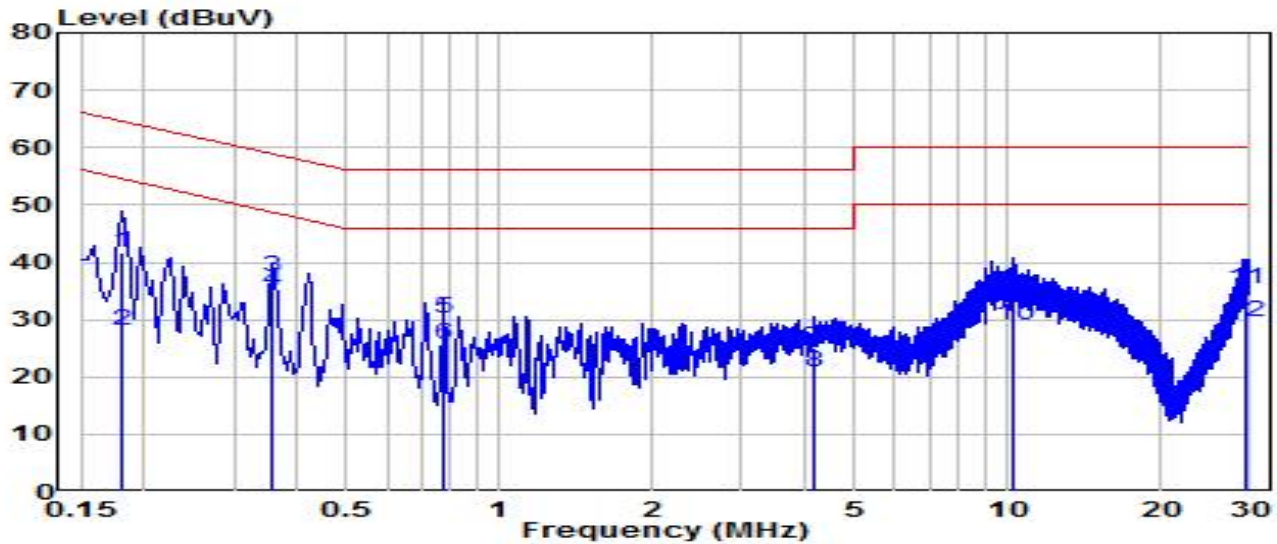


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.181	32.13	9.63	41.76	-22.66	64.42	QP
2	0.181	18.56	9.63	28.19	-26.22	54.42	Average
3	* 0.357	27.67	9.64	37.32	-21.48	58.80	QP
4	* 0.357	25.41	9.64	35.05	-13.75	48.80	Average
5	0.780	20.55	9.67	30.22	-25.78	56.00	QP
6	0.780	16.10	9.67	25.77	-20.23	46.00	Average
7	4.177	15.29	9.73	25.02	-30.98	56.00	QP
8	4.177	10.97	9.73	20.70	-25.30	46.00	Average
9	10.238	24.69	9.87	34.56	-25.44	60.00	QP
10	10.238	19.00	9.87	28.87	-21.13	50.00	Average
11	29.244	25.35	9.93	35.28	-24.72	60.00	QP
12	29.244	19.79	9.93	29.72	-20.28	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1_Ant V	Test Voltage	AC 120V/60Hz

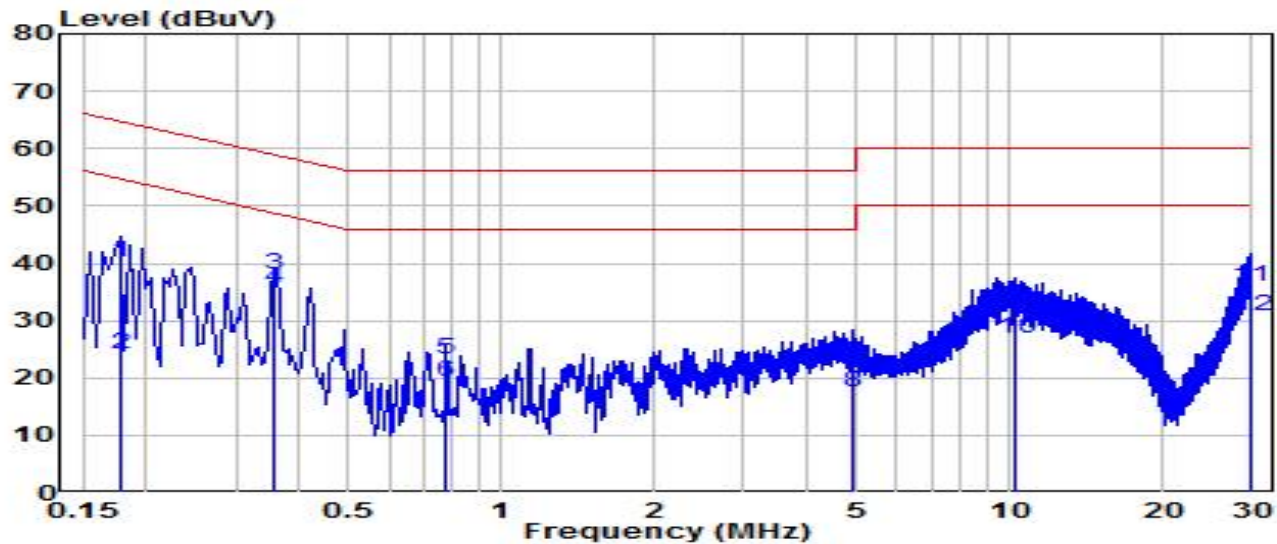


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.177	30.53	9.63	40.17	-24.46	64.63	QP
2	0.177	14.54	9.63	24.17	-30.45	54.63	Average
3	* 0.357	28.46	9.64	38.10	-20.69	58.80	QP
4	* 0.357	25.84	9.64	35.48	-13.32	48.80	Average
5	0.780	13.49	9.67	23.16	-32.84	56.00	QP
6	0.780	9.62	9.67	19.29	-26.71	46.00	Average
7	4.920	12.58	9.76	22.33	-33.67	56.00	QP
8	4.920	7.69	9.76	17.44	-28.56	46.00	Average
9	10.305	22.56	9.89	32.46	-27.54	60.00	QP
10	10.305	16.96	9.89	26.86	-23.14	50.00	Average
11	29.906	25.94	10.06	36.00	-24.00	60.00	QP
12	29.906	20.73	10.06	30.79	-19.21	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1_Ant V	Test Voltage	AC 240V/60Hz

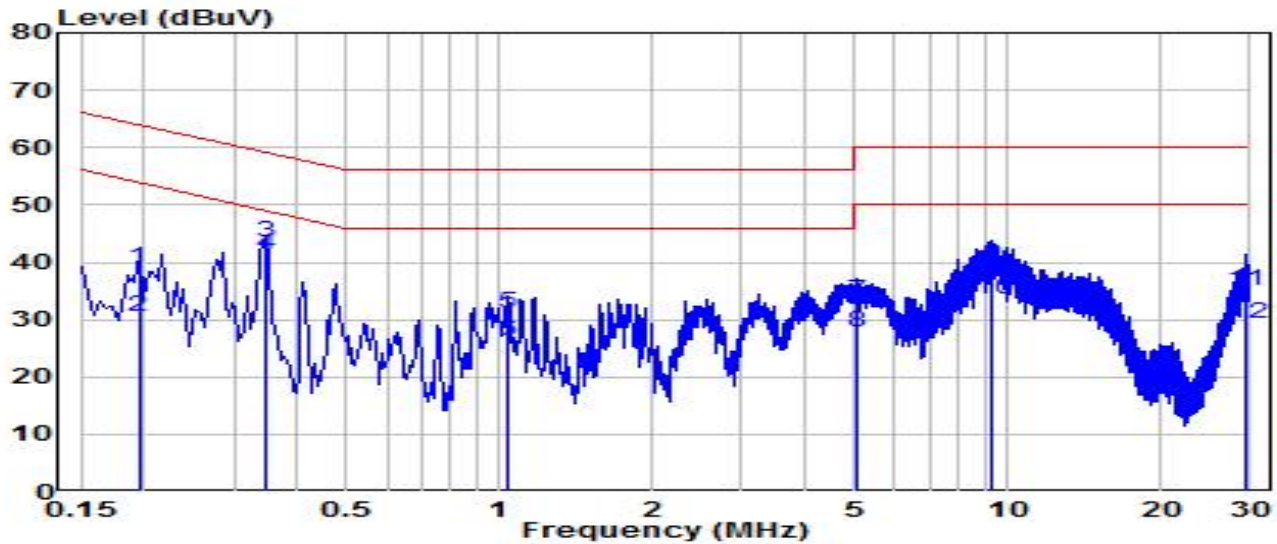


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.195	29.18	9.63	38.81	-25.01	63.82	QP
2	0.195	20.84	9.63	30.48	-23.35	53.82	Average
3	* 0.348	33.78	9.64	43.42	-15.59	59.01	QP
4	* 0.348	31.71	9.64	41.35	-7.66	49.01	Average
5	1.036	21.53	9.68	31.22	-24.78	56.00	QP
6	1.036	16.73	9.68	26.41	-19.59	46.00	Average
7	5.023	23.33	9.75	33.08	-26.92	60.00	QP
8	5.023	18.17	9.75	27.91	-22.09	50.00	Average
9	9.271	29.59	9.85	39.44	-20.56	60.00	QP
10	9.271	23.72	9.85	33.57	-16.43	50.00	Average
11	29.276	25.00	9.93	34.93	-25.07	60.00	QP
12	29.276	19.37	9.93	29.30	-20.70	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1_Ant V	Test Voltage	AC 240V/60Hz

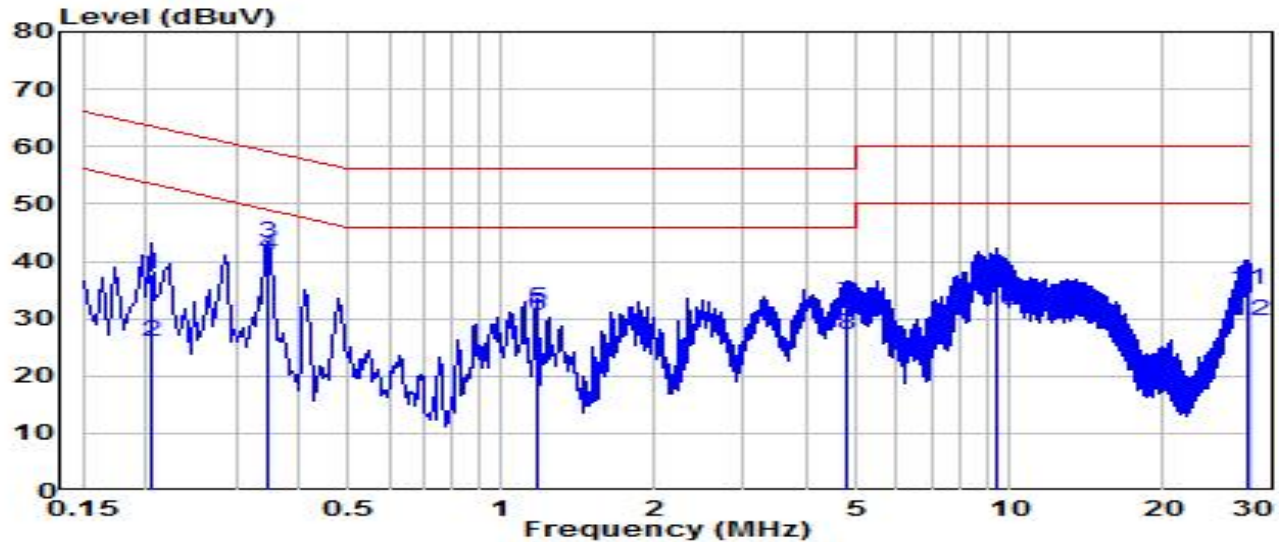

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.204	28.21	9.63	37.84	-25.61	63.45	QP
2	0.204	16.46	9.63	26.09	-27.35	53.45	Average
3	* 0.348	33.60	9.64	43.24	-15.77	59.01	QP
4	* 0.348	31.32	9.64	40.96	-8.05	49.01	Average
5	1.171	22.11	9.69	31.79	-24.21	56.00	QP
6	1.171	20.71	9.69	30.40	-15.60	46.00	Average
7	4.771	22.93	9.75	32.68	-23.32	56.00	QP
8	4.771	17.52	9.75	27.28	-18.72	46.00	Average
9	9.383	27.41	9.87	37.29	-22.71	60.00	QP
10	9.383	21.60	9.87	31.48	-18.52	50.00	Average
11	29.334	25.10	10.05	35.15	-24.85	60.00	QP
12	29.334	19.43	10.05	29.49	-20.51	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2308TW0121-UT” file.

Appendix B : External Photograph

Refer to “2308TW0121-UE” file.

Appendix C : Internal Photograph

Refer to “2308TW0121-UI” file.

_____ The End _____