


EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

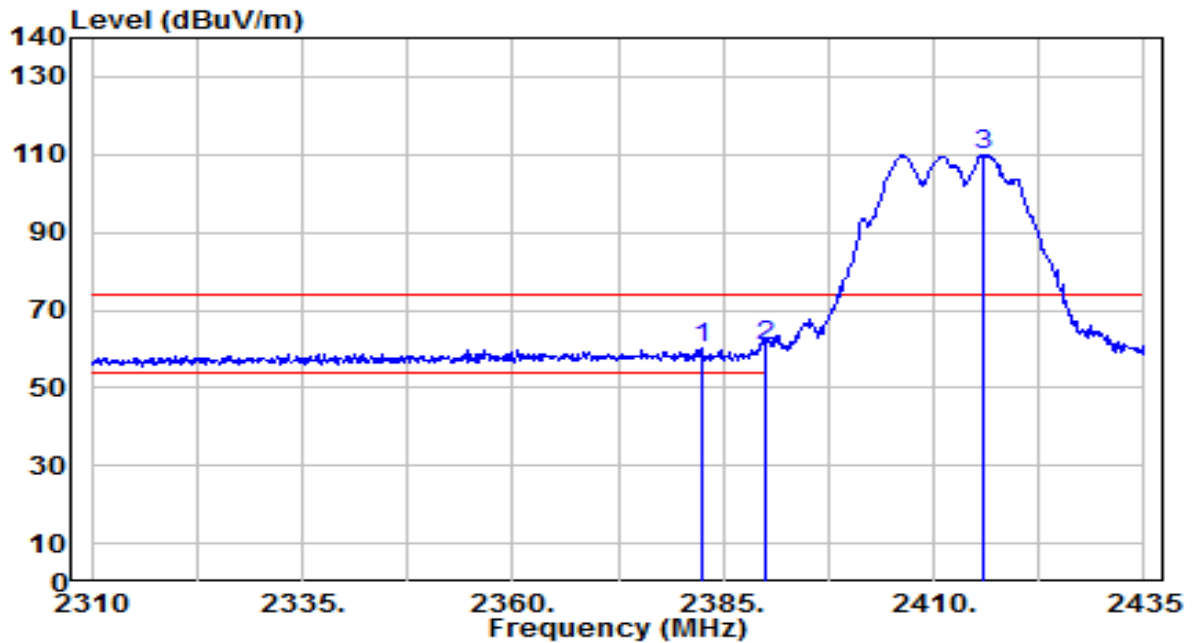


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2382.375	27.32	32.70	60.01	-13.99	74.00	115	215	Peak
2	*	2390.000	28.15	32.73	60.88	-13.12	74.00	115	215	Peak
3		2415.875	77.16	32.83	109.99	N/A	N/A	115	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

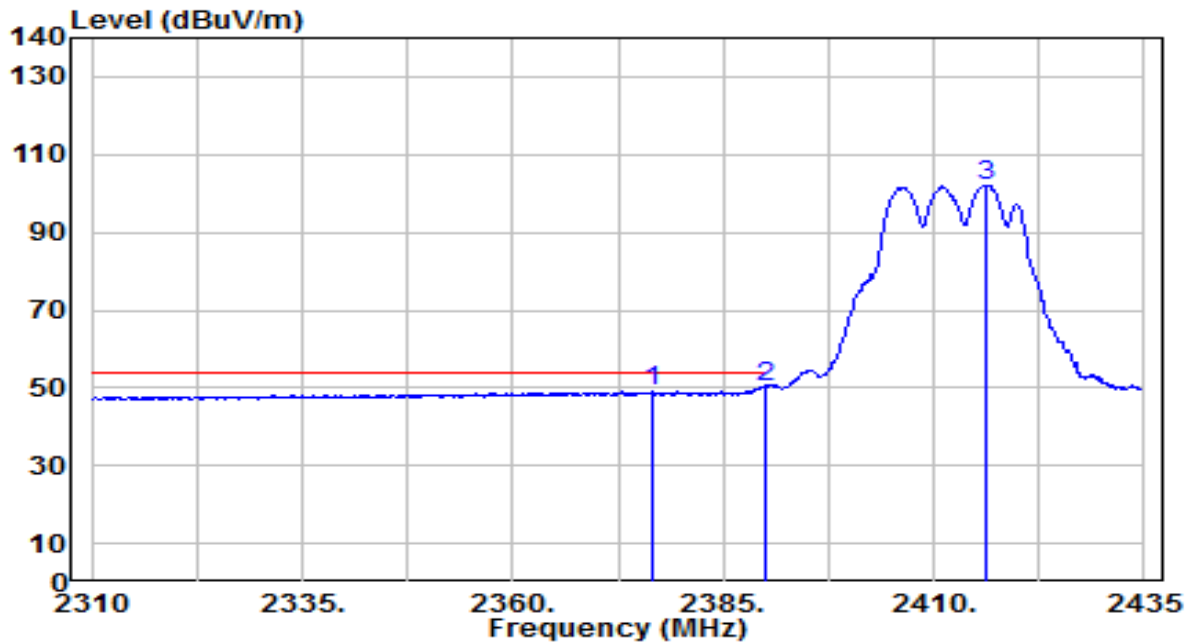


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2376.625	16.38	32.67	49.06	-4.94	54.00	115	215	Average
2	*	2390.000	17.56	32.73	50.29	-3.71	54.00	115	215	Average
3		2416.125	69.38	32.83	102.21	N/A	N/A	115	215	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

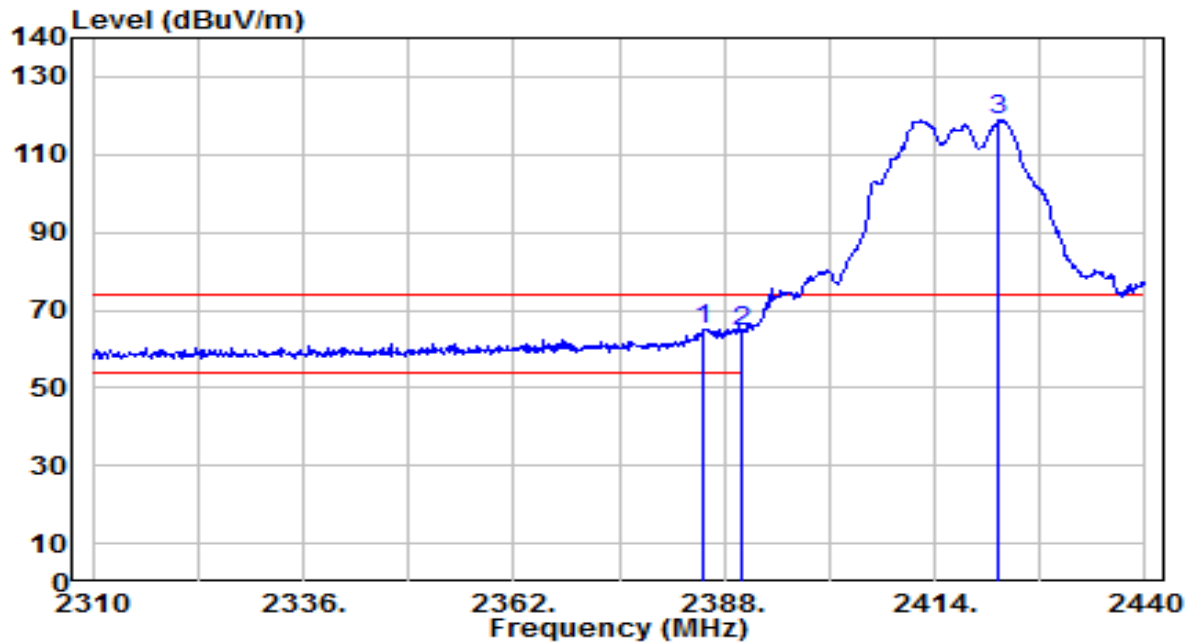


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.530	32.49	32.71	65.20	-8.80	74.00	250	240	Peak
2		2390.000	31.61	32.73	64.34	-9.66	74.00	250	240	Peak
3		2421.930	85.92	32.85	118.77	N/A	N/A	250	240	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

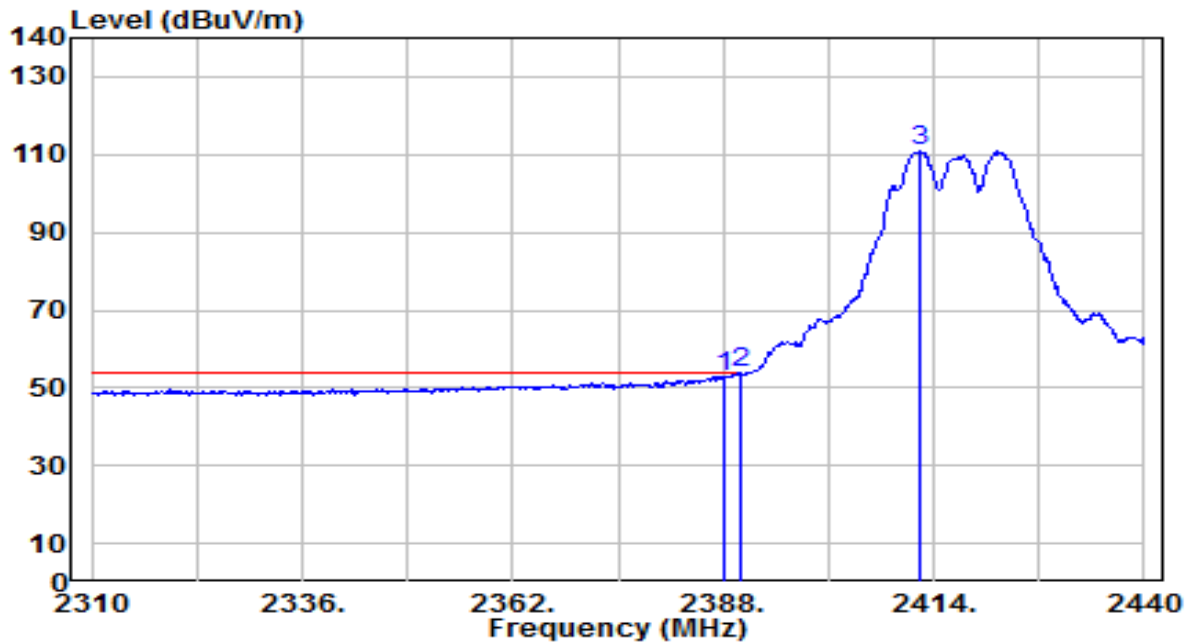


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	20.10	32.72	52.82	-1.18	54.00	250	240	Average
2	*	2390.000	20.98	32.73	53.71	-0.29	54.00	250	240	Average
3		2412.310	78.14	32.81	110.95	N/A	N/A	250	240	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

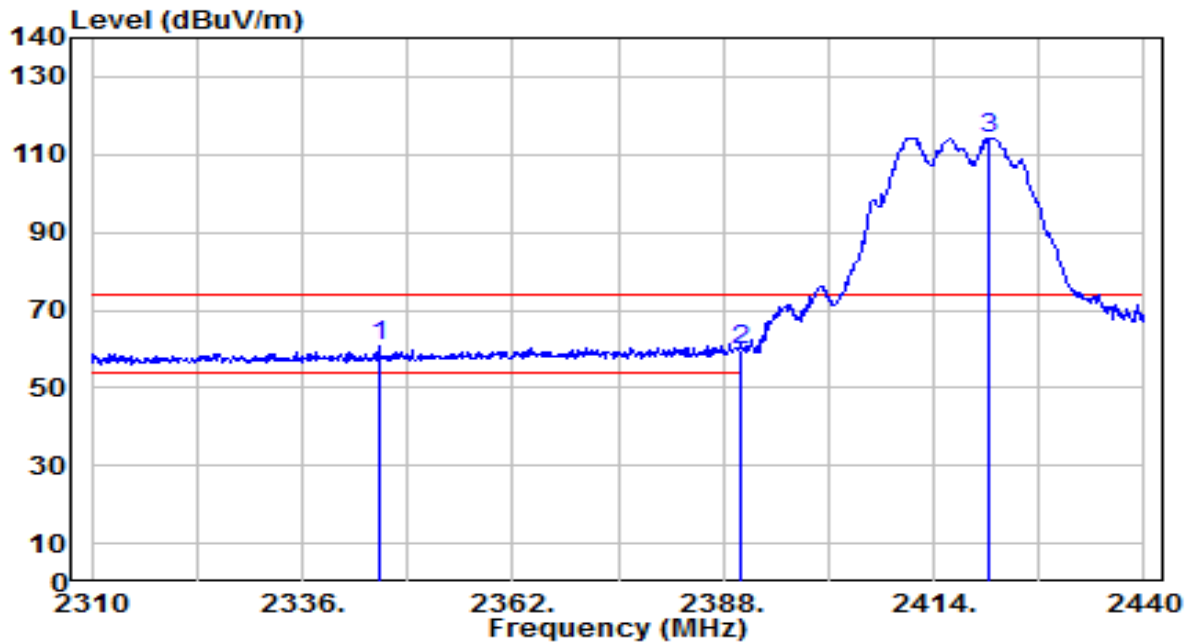


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2345.490	28.40	32.55	60.95	-13.05	74.00	115	215	Peak
2		2390.000	27.03	32.73	59.76	-14.24	74.00	115	215	Peak
3		2420.760	81.47	32.85	114.32	N/A	N/A	115	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

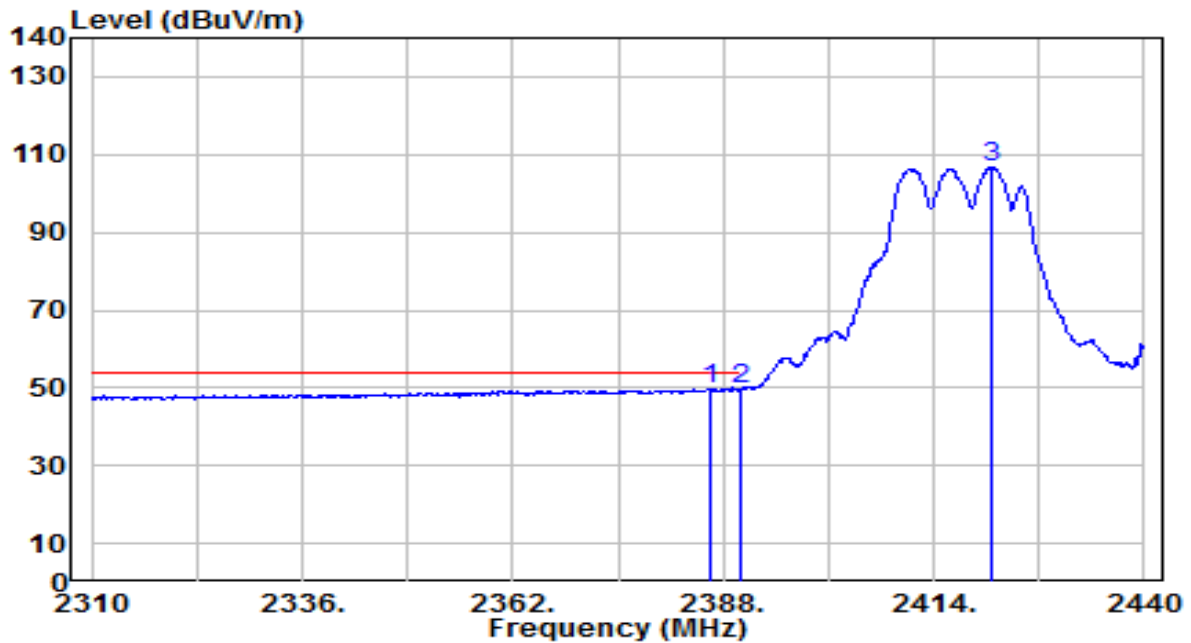


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.570	17.01	32.71	49.73	-4.27	54.00	115	215	Average
2		2390.000	16.70	32.73	49.42	-4.58	54.00	115	215	Average
3		2421.280	73.66	32.85	106.51	N/A	N/A	115	215	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

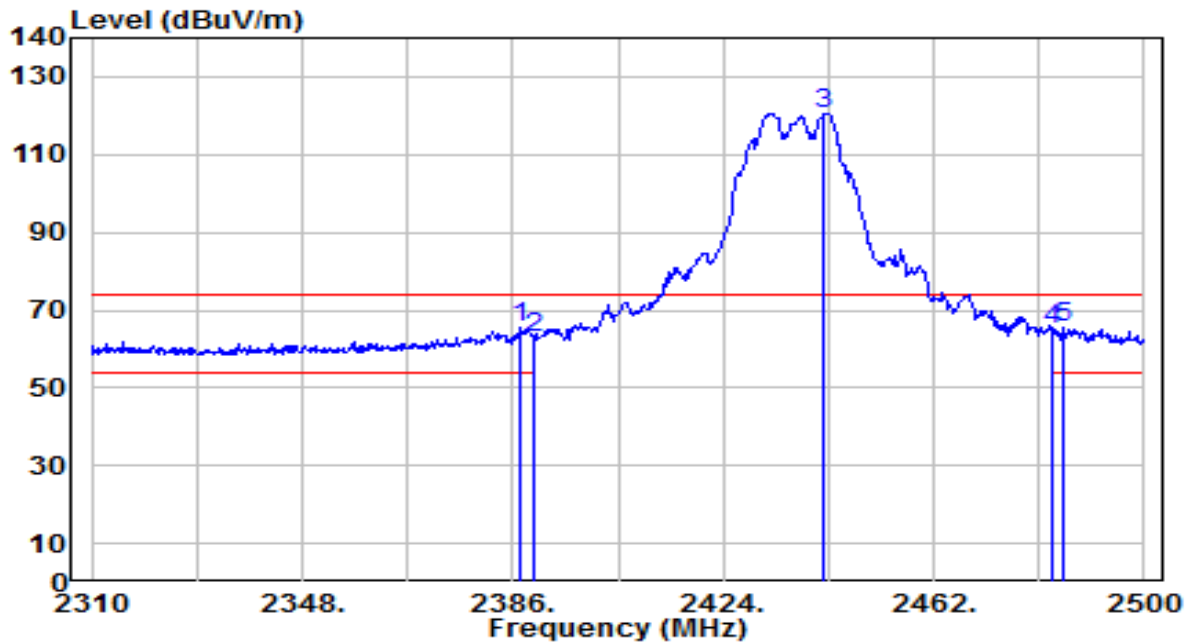


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	32.71	32.72	65.43	-8.57	74.00	220	235	Peak
2	2390.000	30.40	32.73	63.12	-10.88	74.00	220	235	Peak
3	2442.240	87.67	32.93	120.60	N/A	N/A	220	235	Peak
4	2483.500	32.12	33.09	65.21	-8.79	74.00	220	235	Peak
5	* 2485.180	32.46	33.10	65.57	-8.43	74.00	220	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

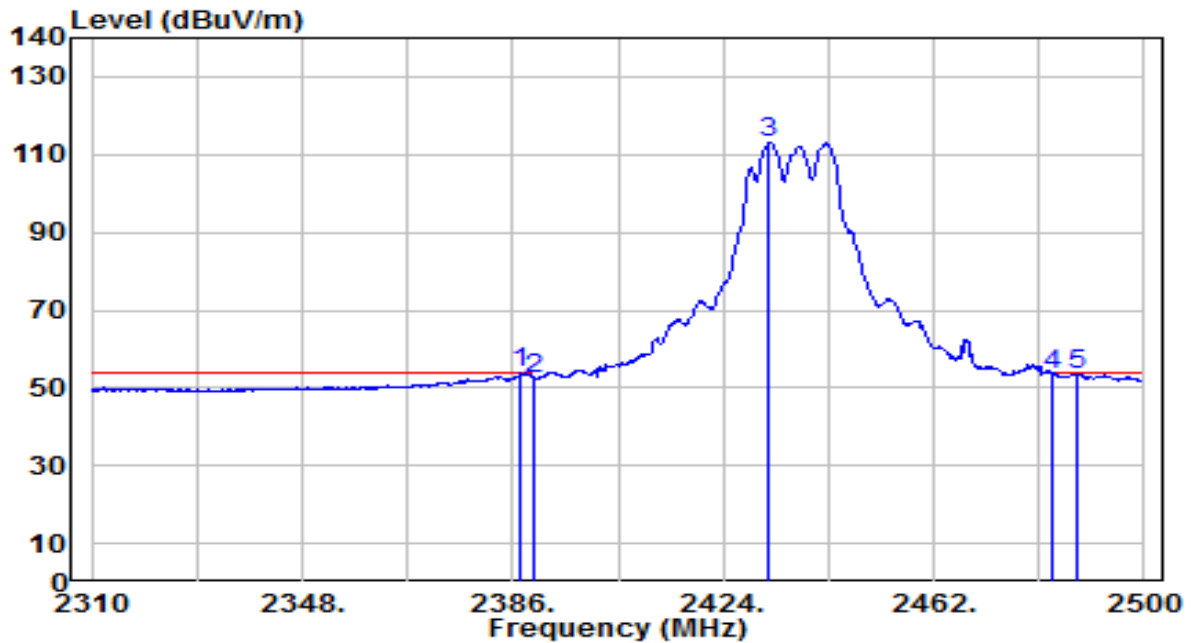


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.520	20.99	32.72	53.71	-0.29	54.00	220	235	Average
2		2390.000	19.84	32.73	52.56	-1.44	54.00	220	235	Average
3		2432.360	80.10	32.89	112.99	N/A	N/A	220	235	Average
4		2483.500	20.52	33.09	53.62	-0.38	54.00	220	235	Average
5		2487.650	20.46	33.11	53.57	-0.43	54.00	220	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

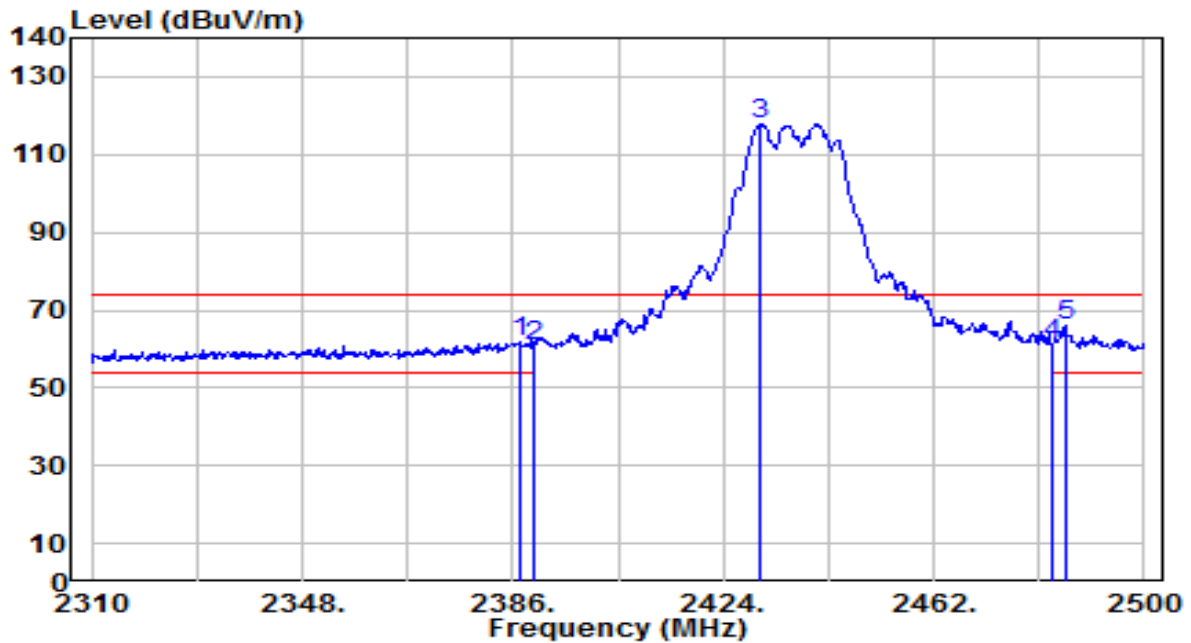


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	29.07	32.72	61.78	-12.22	74.00	240	150	Peak
2	2390.000	28.25	32.73	60.97	-13.03	74.00	240	150	Peak
3	2430.840	85.04	32.89	117.93	N/A	N/A	240	150	Peak
4	2483.500	28.37	33.09	61.47	-12.53	74.00	240	150	Peak
5	* 2485.750	32.88	33.10	65.98	-8.02	74.00	240	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

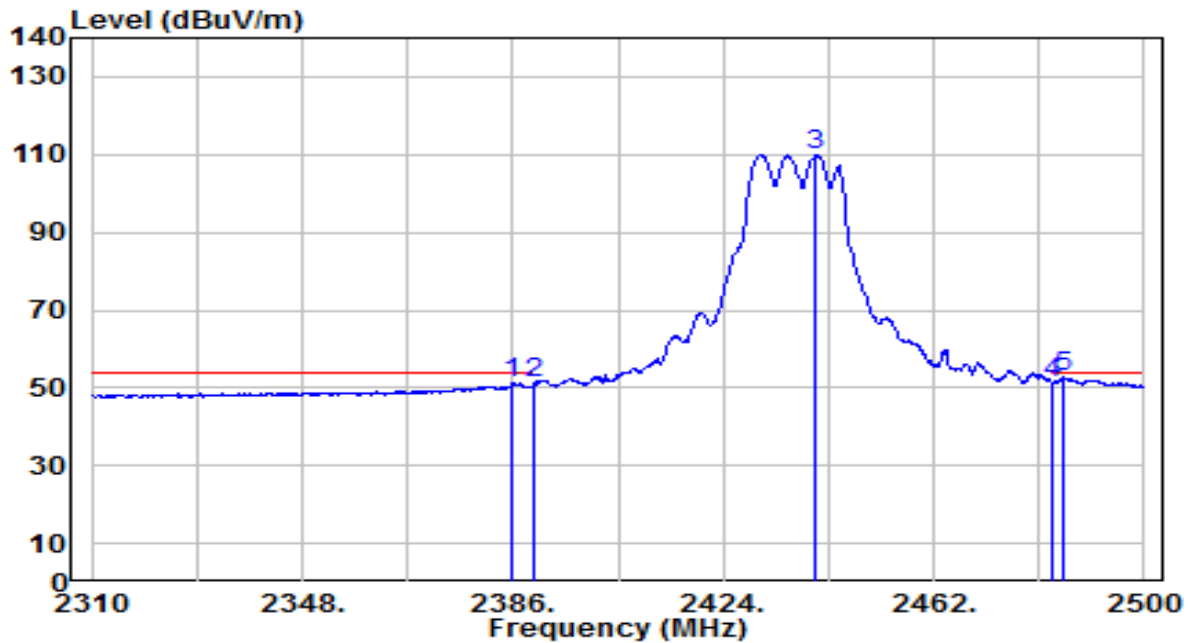


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	18.67	32.71	51.38	-2.62	54.00	240	150	Average
2	2390.000	18.28	32.73	51.01	-2.99	54.00	240	150	Average
3	2440.720	77.01	32.93	109.93	N/A	N/A	240	150	Average
4	2483.500	18.09	33.09	51.18	-2.82	54.00	240	150	Average
5	* 2485.560	19.70	33.10	52.81	-1.19	54.00	240	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

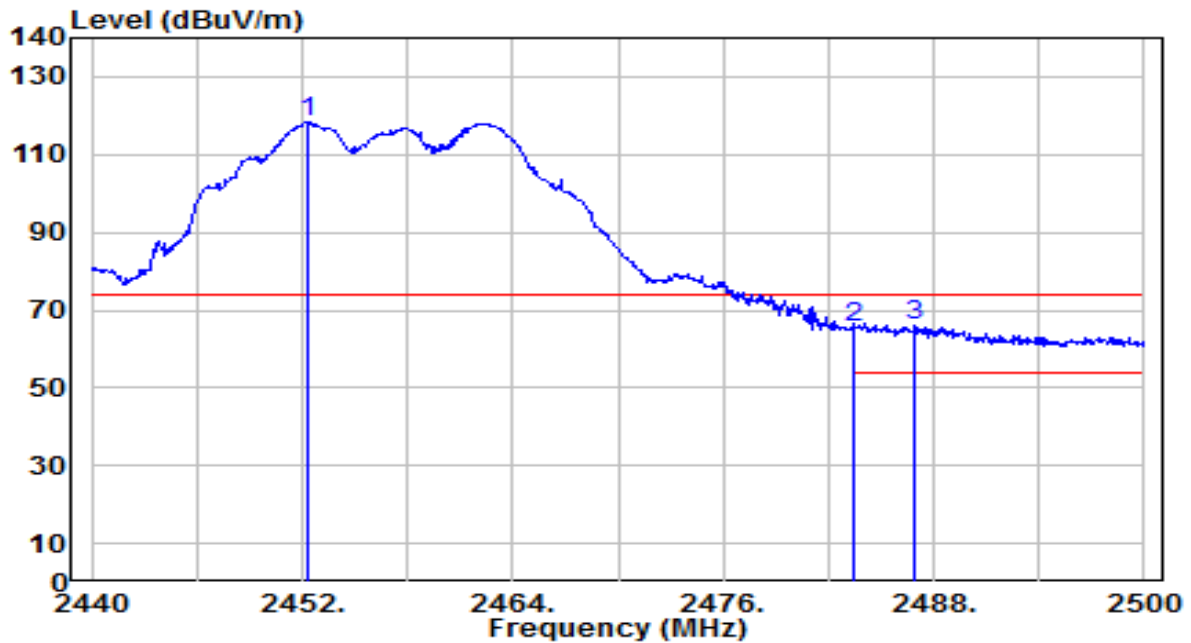


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2452.300	85.29	32.97	118.26	N/A	N/A	240	230	Peak
2	2483.500	32.63	33.09	65.73	-8.27	74.00	240	230	Peak
3	* 2486.920	32.82	33.11	65.93	-8.07	74.00	240	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

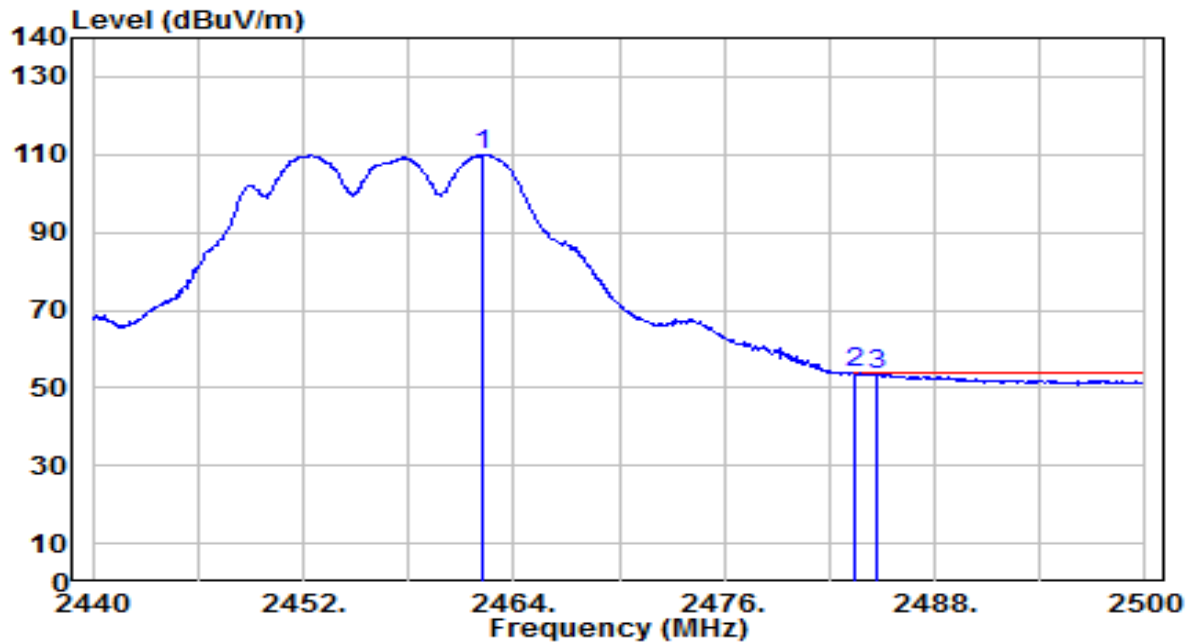


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.260	77.03	33.01	110.04	N/A	N/A	240	230	Average
2	*	2483.500	20.63	33.09	53.72	-0.28	54.00	240	230	Average
3		2484.700	20.36	33.10	53.46	-0.54	54.00	240	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

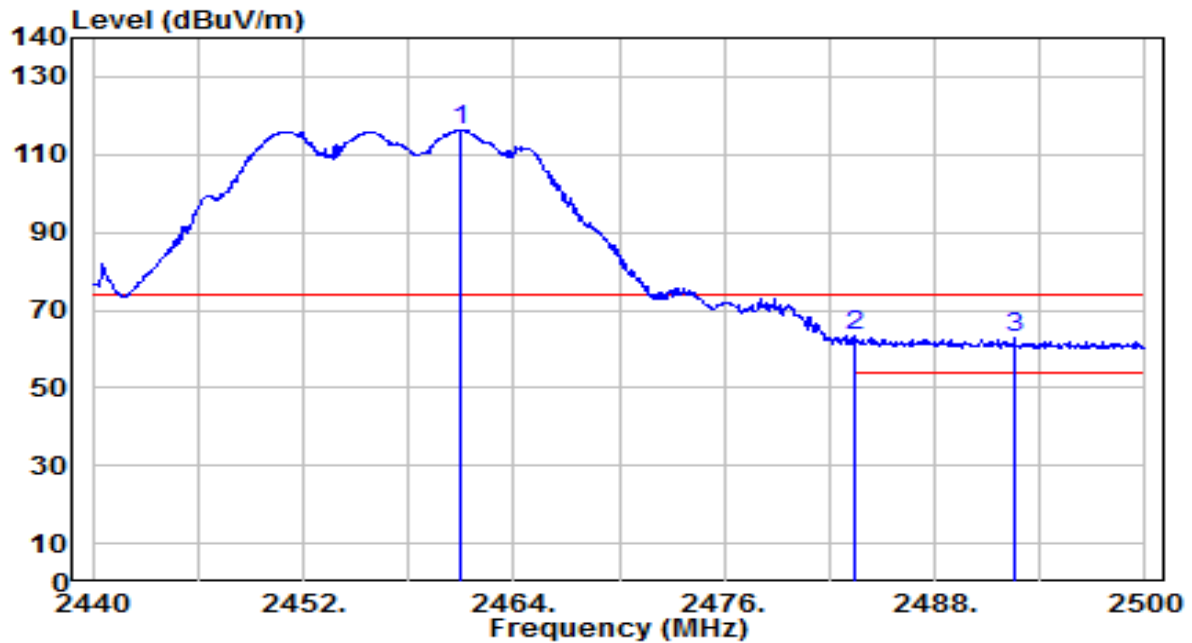


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.000	83.29	33.01	116.30	N/A	N/A	195	150	Peak
2	*	2483.500	30.20	33.09	63.30	-10.70	74.00	195	150	Peak
3		2492.560	29.73	33.13	62.86	-11.14	74.00	195	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

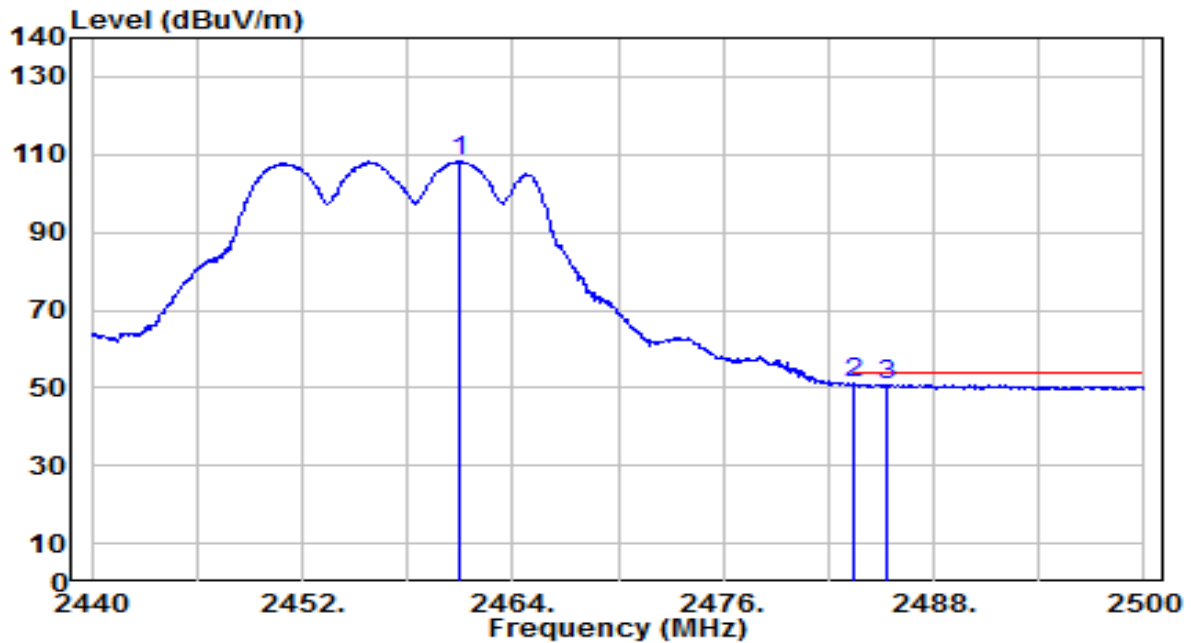


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.000	75.42	33.01	108.42	N/A	N/A	195	150	Average
2	*	2483.500	17.98	33.09	51.08	-2.92	54.00	195	150	Average
3		2485.360	17.77	33.10	50.88	-3.12	54.00	195	150	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

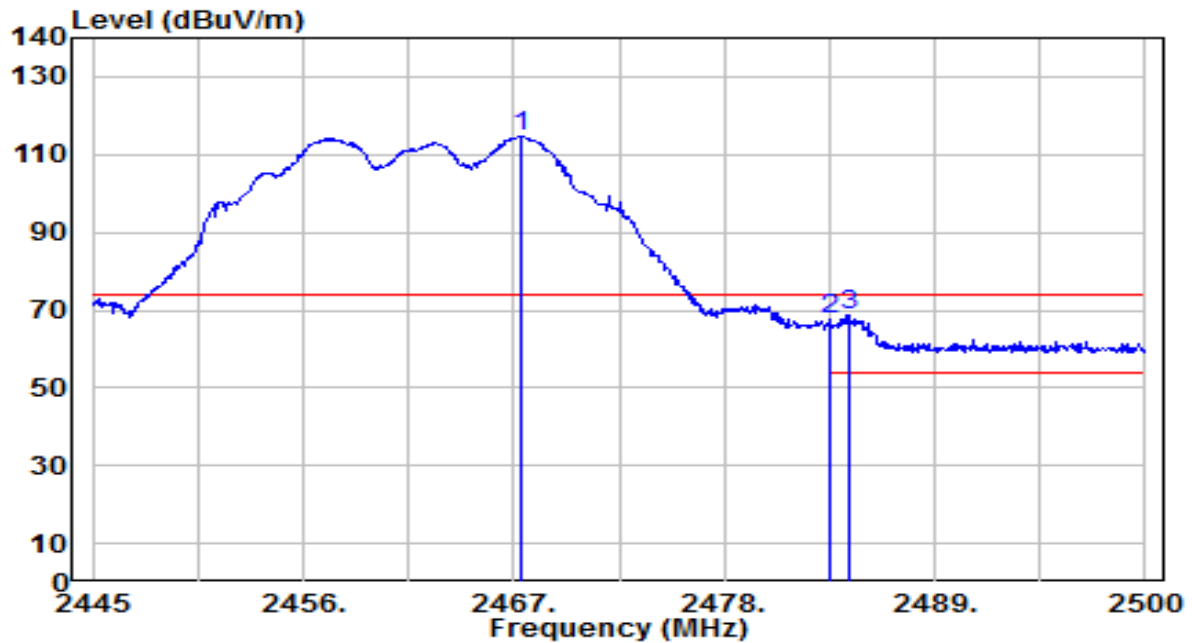


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.330	81.47	33.03	114.50	N/A	N/A	240	230	Peak
2	2483.500	34.63	33.09	67.73	-6.27	74.00	240	230	Peak
3	* 2484.490	35.51	33.10	68.61	-5.39	74.00	240	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

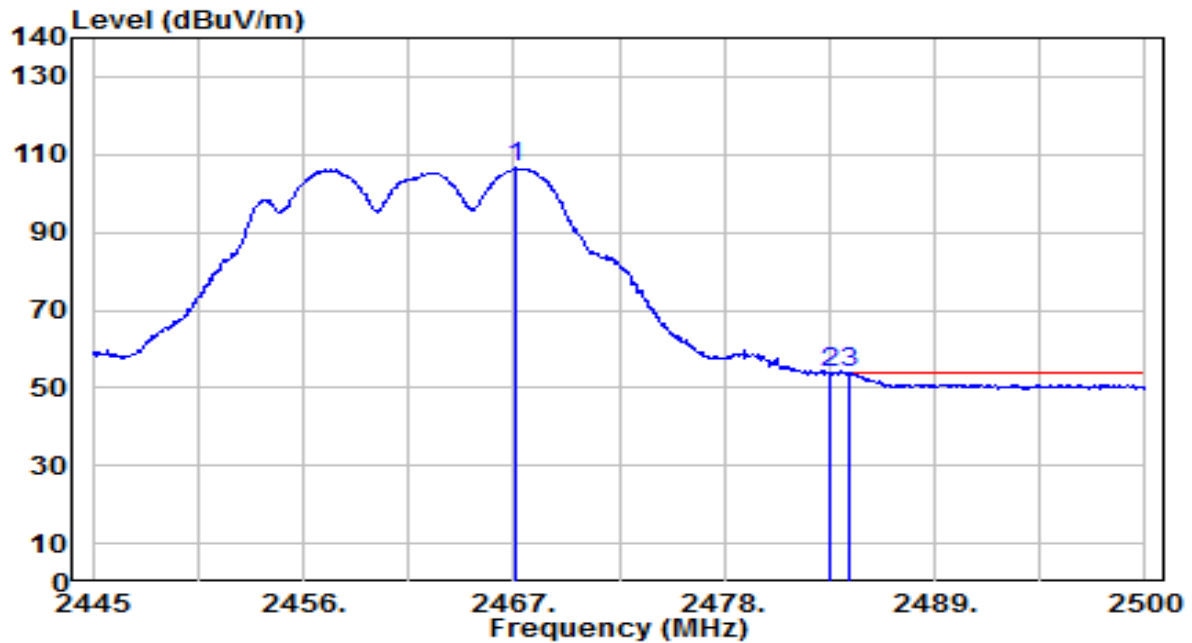


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.055	73.49	33.03	106.52	N/A	N/A	240	230	Average
2	2483.500	20.63	33.09	53.73	-0.27	54.00	240	230	Average
3	* 2484.490	20.80	33.10	53.90	-0.10	54.00	240	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

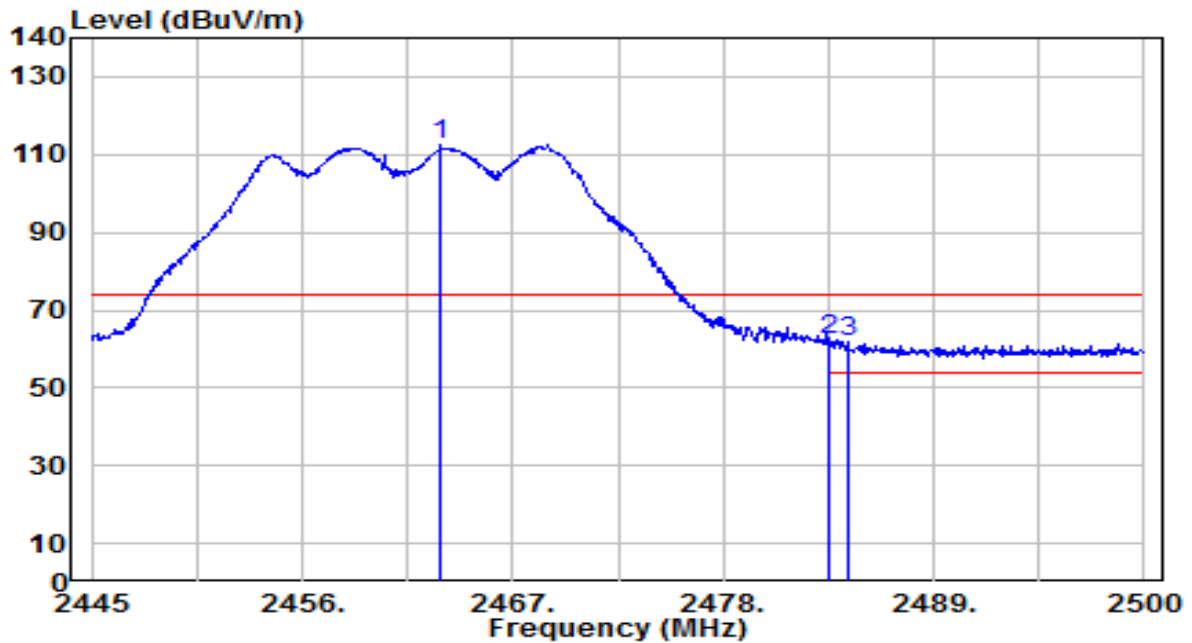


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.260	79.71	33.02	112.72	N/A	N/A	195	150	Peak
2	* 2483.500	29.31	33.09	62.41	-11.59	74.00	195	150	Peak
3	2484.545	28.48	33.10	61.57	-12.43	74.00	195	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

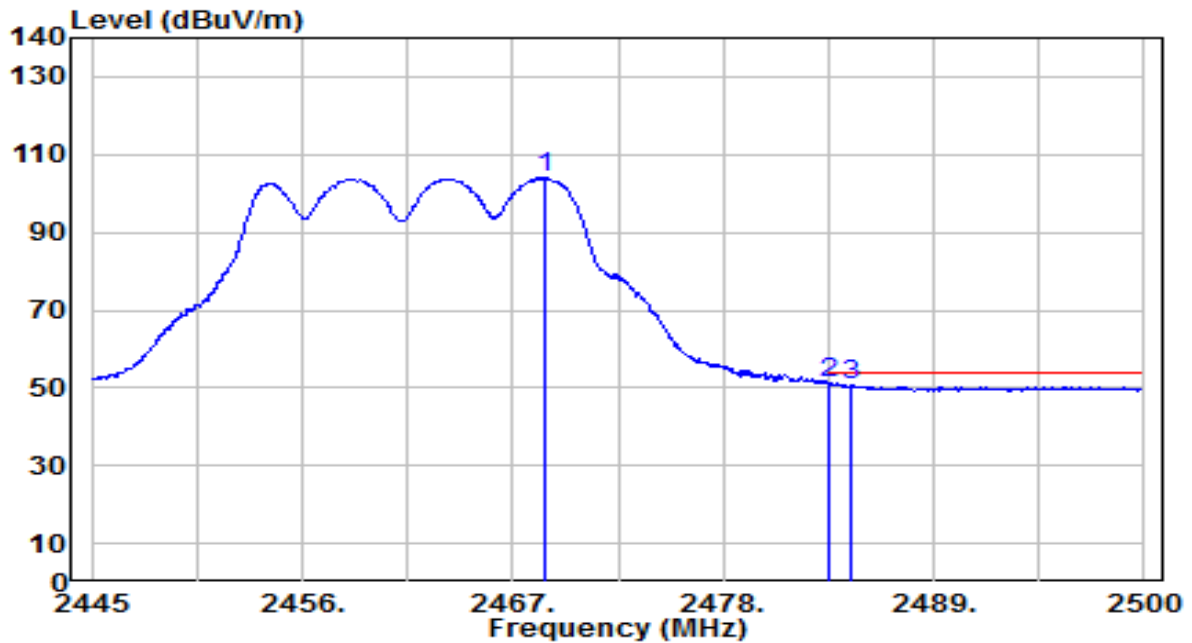


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2468.650	71.02	33.04	104.05	N/A	N/A	195	150	Average
2	*	2483.500	18.14	33.09	51.24	-2.76	54.00	195	150	Average
3		2484.655	17.39	33.10	50.49	-3.51	54.00	195	150	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

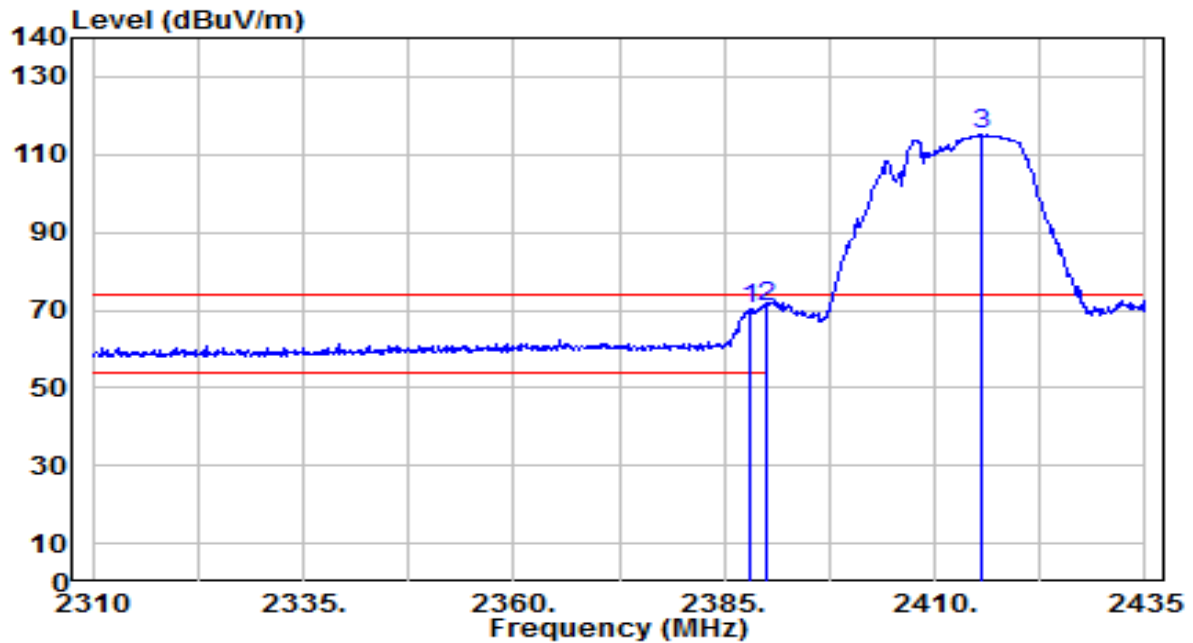


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	37.65	32.72	70.37	-3.63	74.00	190	235	Peak
2	*	2390.000	38.25	32.73	70.98	-3.02	74.00	190	235	Peak
3		2415.625	82.19	32.83	115.02	N/A	N/A	190	235	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

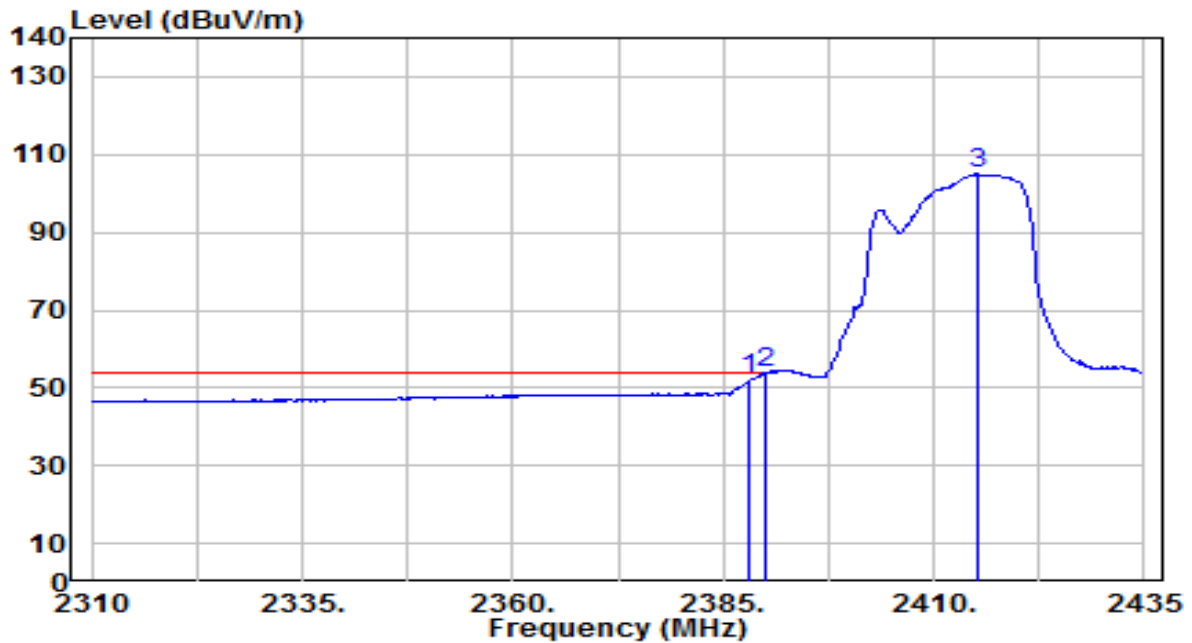


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	19.33	32.72	52.05	-1.95	54.00	190	235	Average
2	*	2390.000	21.14	32.73	53.86	-0.14	54.00	190	235	Average
3		2415.125	72.30	32.83	105.12	N/A	N/A	190	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

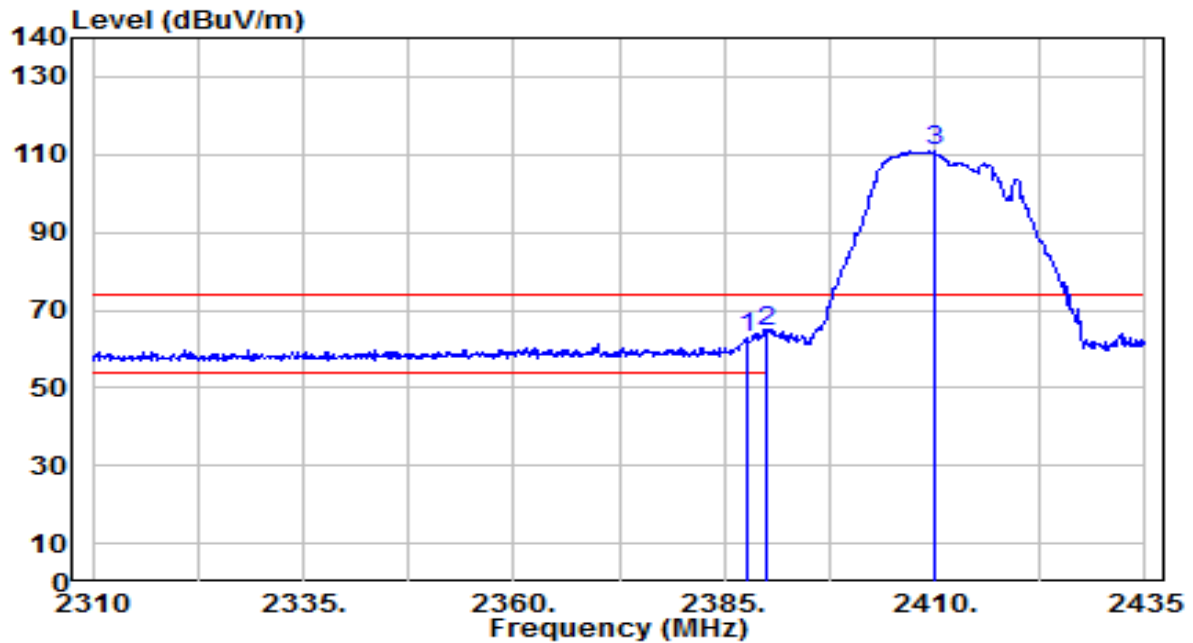


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.875	30.02	32.72	62.74	-11.26	74.00	125	230	Peak
2	*	2390.000	31.79	32.73	64.52	-9.48	74.00	125	230	Peak
3		2410.000	78.24	32.81	111.05	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

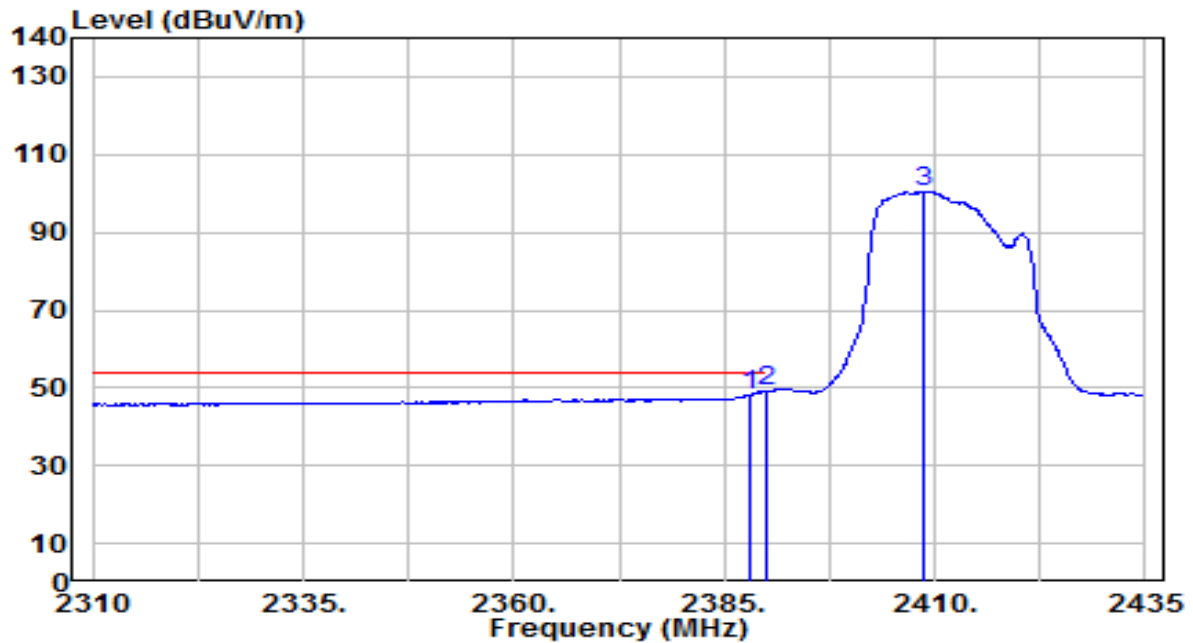


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	15.50	32.72	48.22	-5.78	54.00	125	230	Average
2	*	2390.000	16.51	32.73	49.24	-4.76	54.00	125	230	Average
3		2408.750	67.82	32.80	100.62	N/A	N/A	125	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

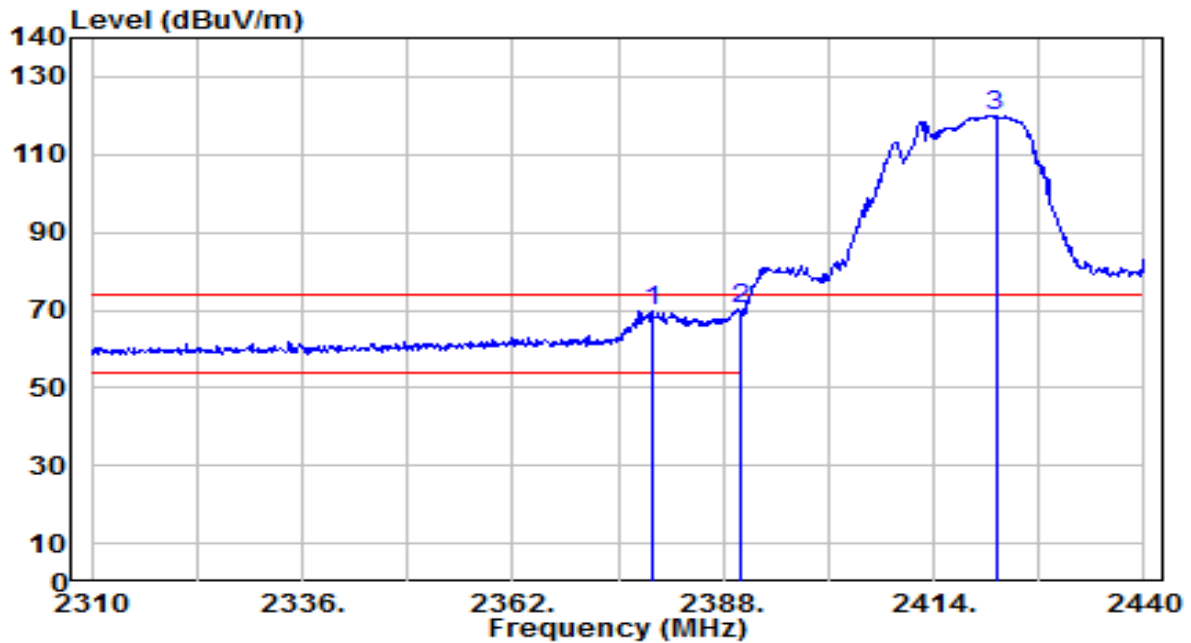


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2379.160	37.30	32.68	69.99	-4.01	74.00	190	235	Peak
2	*	2390.000	37.35	32.73	70.08	-3.92	74.00	190	235	Peak
3		2421.670	87.14	32.85	119.99	N/A	N/A	190	235	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

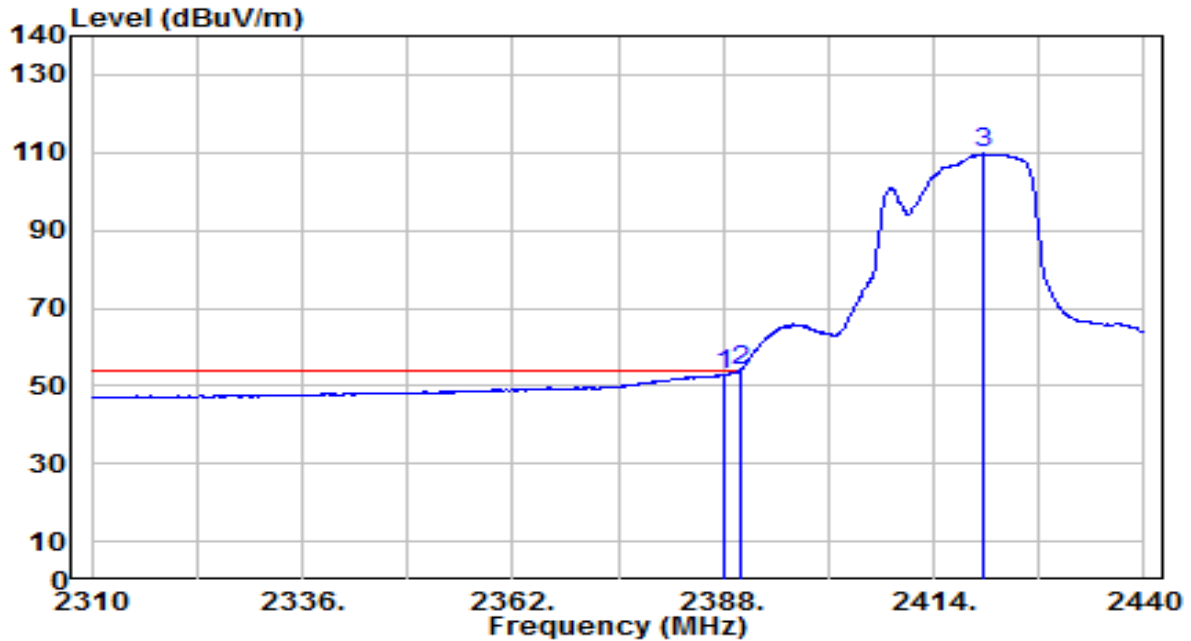


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	20.22	32.72	52.94	-1.06	54.00	190	235	Average
2	*	2390.000	21.16	32.73	53.88	-0.12	54.00	190	235	Average
3		2420.240	76.82	32.85	109.67	N/A	N/A	190	235	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

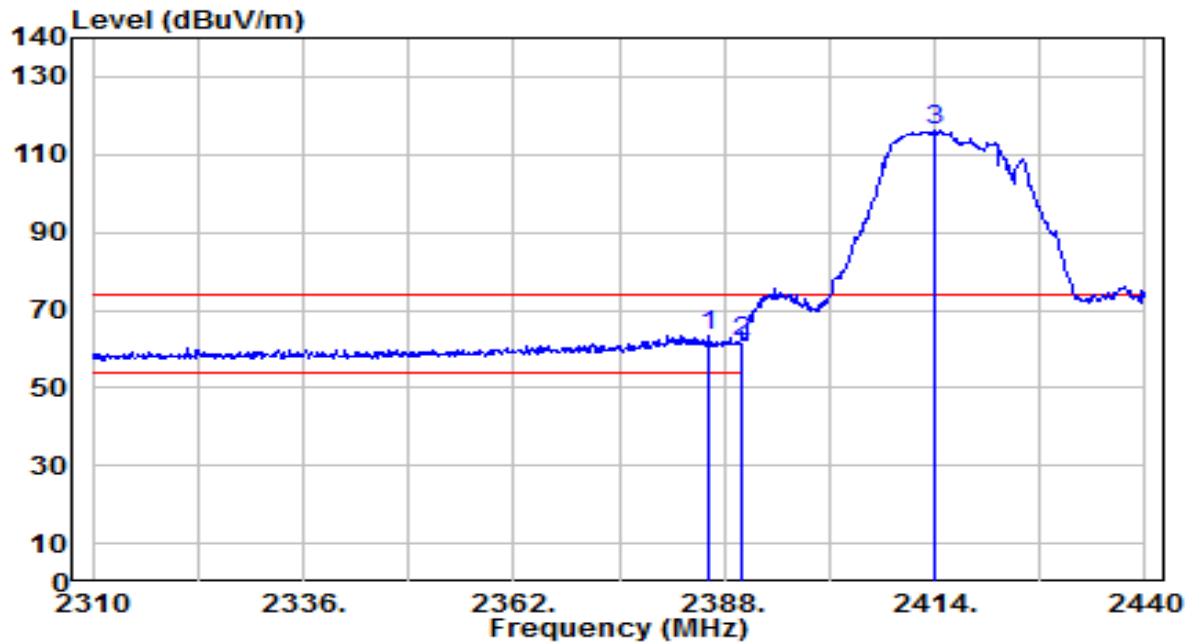


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.050	30.66	32.71	63.37	-10.63	74.00	125	230	Peak
2		2390.000	29.13	32.73	61.86	-12.14	74.00	125	230	Peak
3		2414.000	83.23	32.82	116.06	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

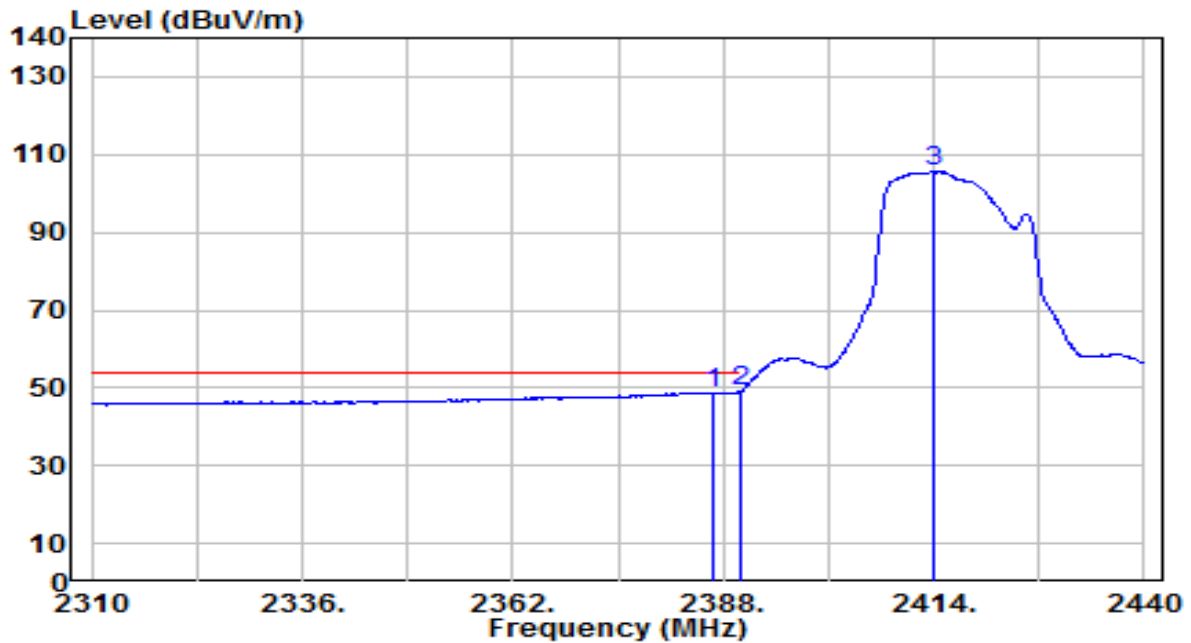


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.700	16.03	32.71	48.74	-5.26	54.00	125	230	Average
2	*	2390.000	16.27	32.73	48.99	-5.01	54.00	125	230	Average
3		2414.000	72.86	32.82	105.68	N/A	N/A	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

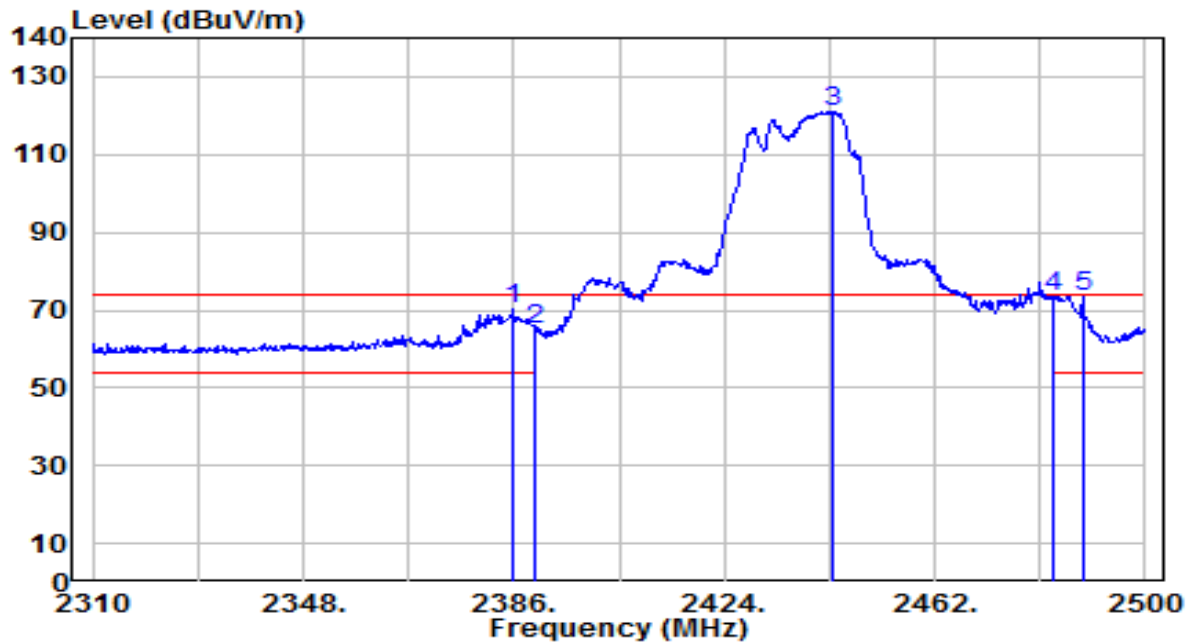


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	37.61	32.71	70.32	-3.68	74.00	155	230	Peak
2	2390.000	32.11	32.73	64.84	-9.16	74.00	155	230	Peak
3	2443.380	88.17	32.94	121.10	N/A	N/A	155	230	Peak
4	* 2483.500	40.40	33.09	73.49	-0.51	74.00	155	230	Peak
5	2488.790	40.30	33.12	73.41	-0.59	74.00	155	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

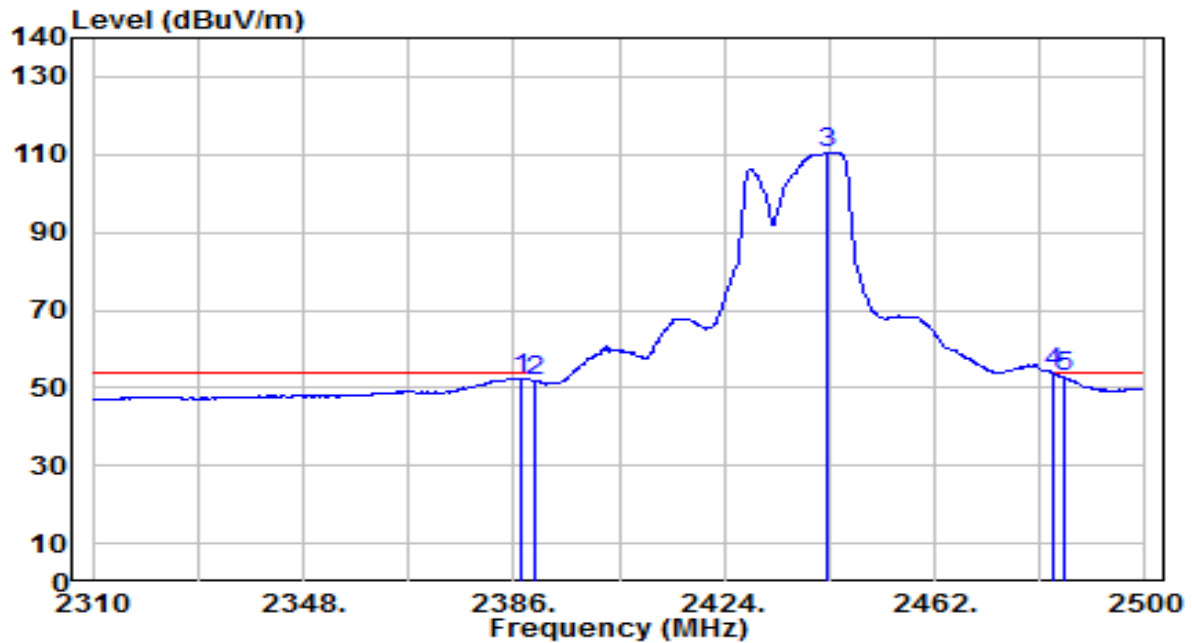


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	19.74	32.72	52.45	-1.55	54.00	155	230	Average
2	2390.000	18.99	32.73	51.72	-2.28	54.00	155	230	Average
3	2442.430	77.70	32.93	110.63	N/A	N/A	155	230	Average
4	* 2483.500	20.64	33.09	53.73	-0.27	54.00	155	230	Average
5	2485.180	19.68	33.10	52.78	-1.22	54.00	155	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

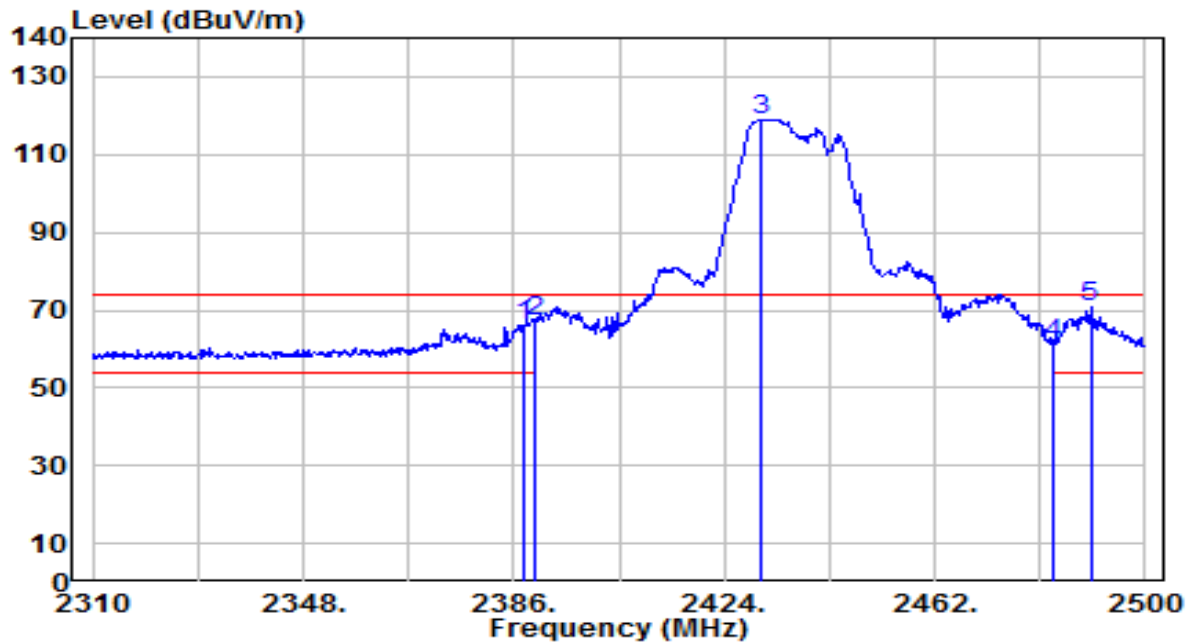


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	33.30	32.72	66.02	-7.98	74.00	265	155	Peak
2	2390.000	34.31	32.73	67.03	-6.97	74.00	265	155	Peak
3	2430.840	86.23	32.89	119.12	N/A	N/A	265	155	Peak
4	2483.500	28.04	33.09	61.14	-12.86	74.00	265	155	Peak
5	* 2490.120	37.71	33.12	70.83	-3.17	74.00	265	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

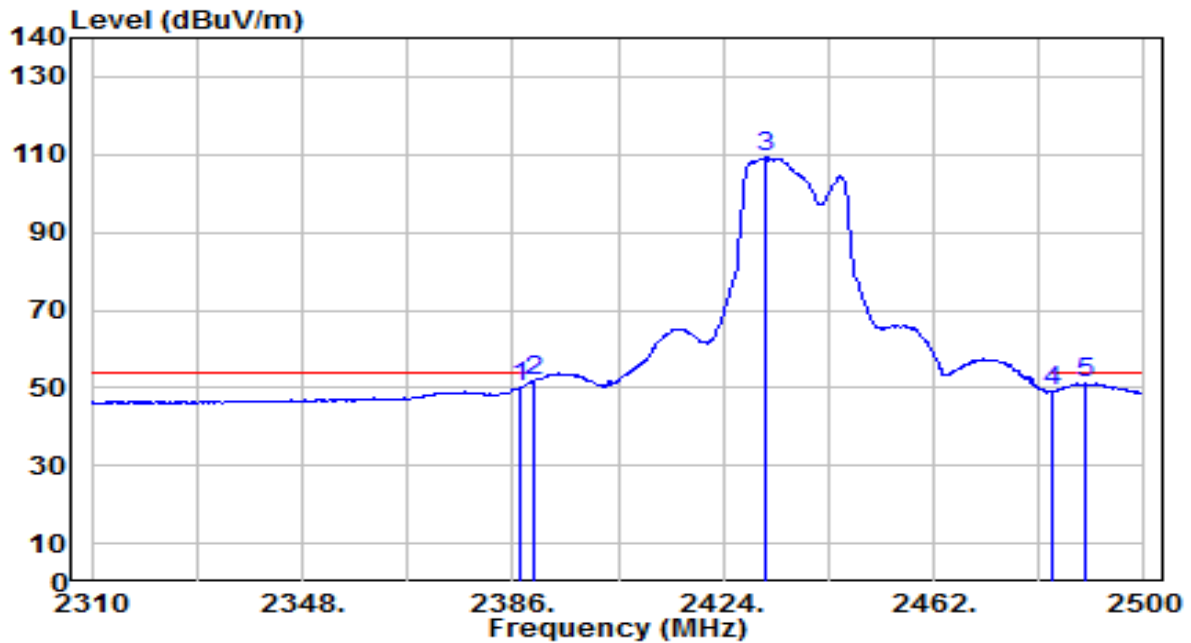


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.520	17.65	32.72	50.36	-3.64	54.00	265	155	Average
2	*	2390.000	19.27	32.73	52.00	-2.00	54.00	265	155	Average
3		2431.410	76.25	32.89	109.14	N/A	N/A	265	155	Average
4		2483.500	15.83	33.09	48.93	-5.07	54.00	265	155	Average
5		2489.360	17.91	33.12	51.03	-2.97	54.00	265	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

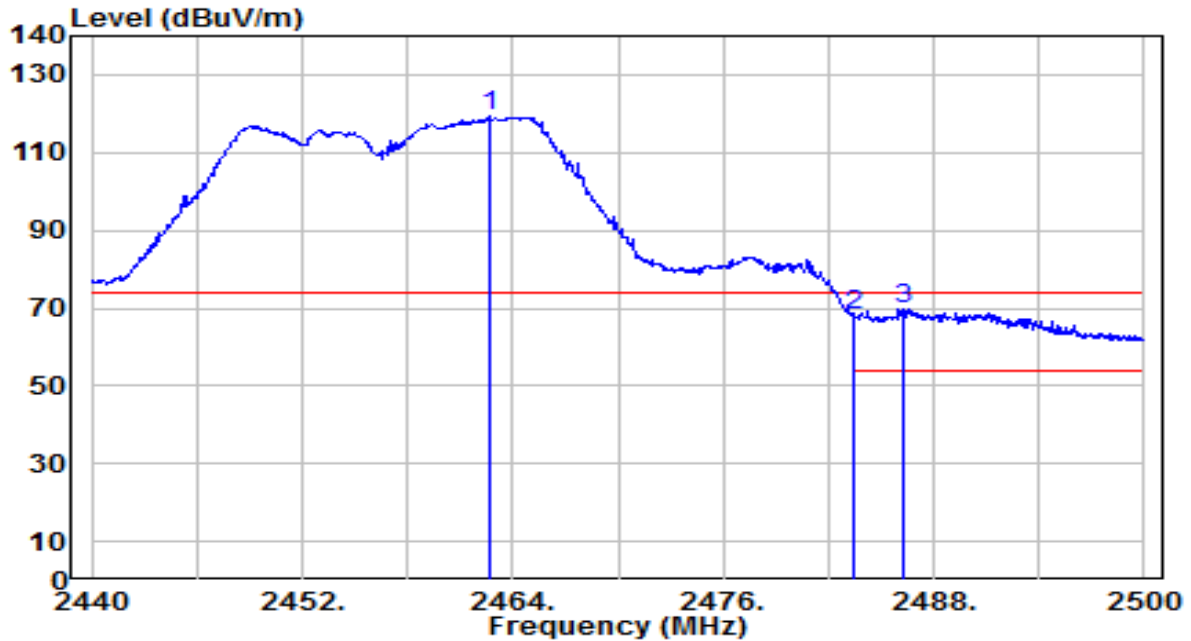


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.620	86.17	33.01	119.18	N/A	N/A	180	135	Peak
2	2483.500	35.00	33.09	68.09	-5.91	74.00	180	135	Peak
3	* 2486.200	36.88	33.11	69.98	-4.02	74.00	180	135	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

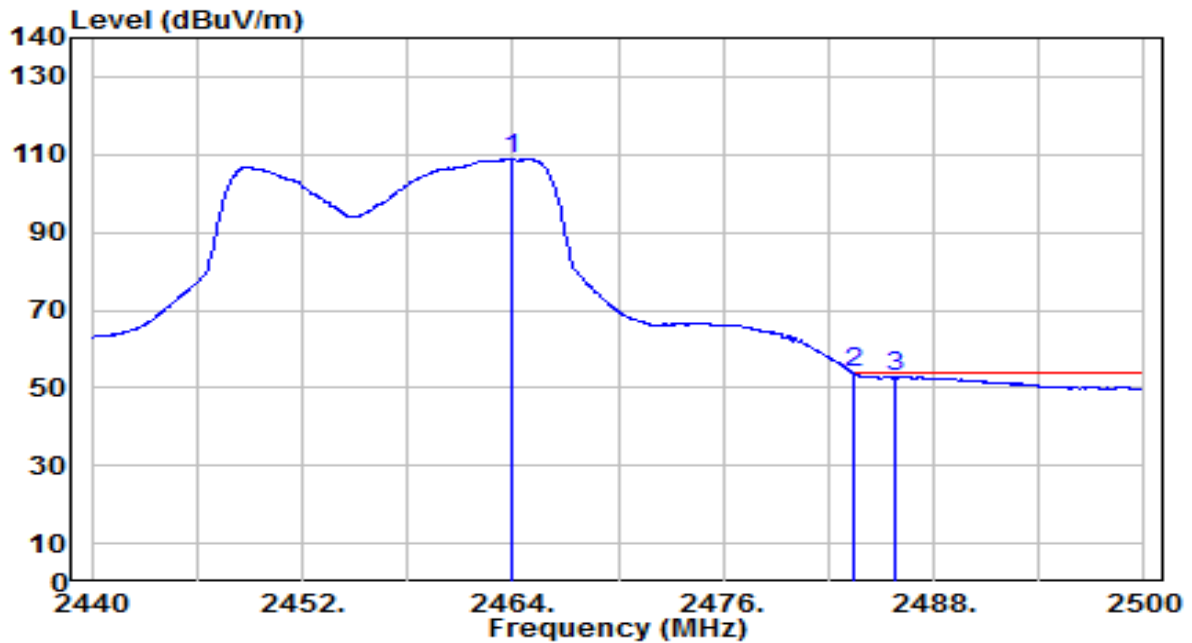


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.000	75.96	33.02	108.98	N/A	N/A	180	135	Average
2	*	2483.500	20.62	33.09	53.71	-0.29	54.00	180	135	Average
3		2485.840	19.75	33.10	52.85	-1.15	54.00	180	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

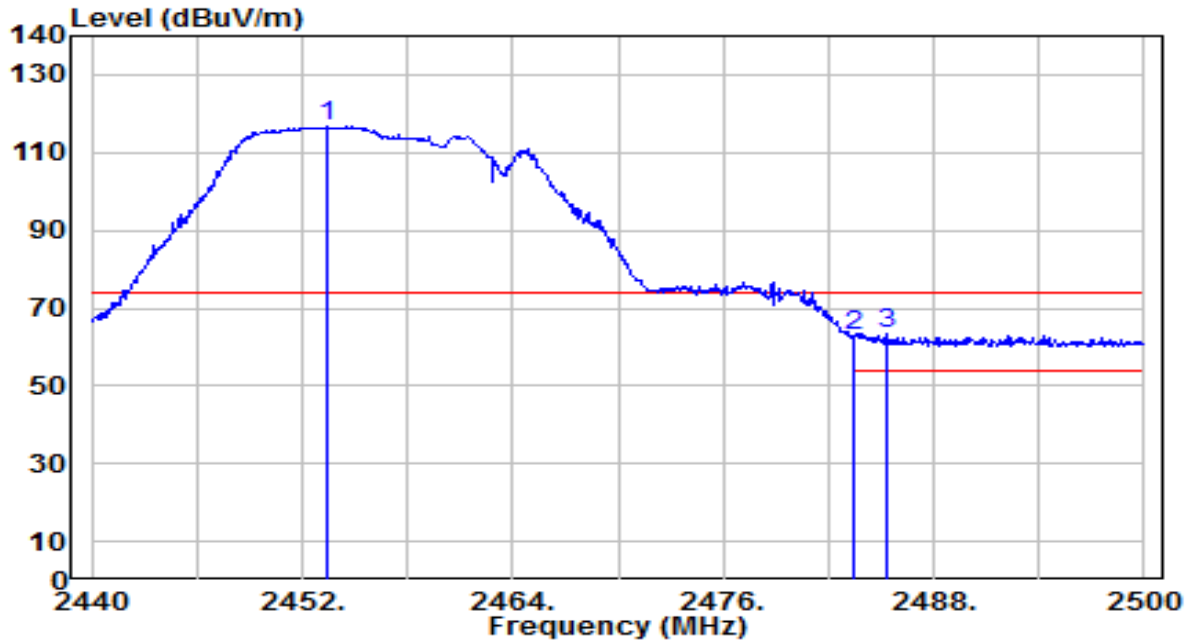


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.380	83.76	32.98	116.74	N/A	N/A	125	225	Peak
2	2483.500	29.92	33.09	63.02	-10.98	74.00	125	225	Peak
3	* 2485.360	30.53	33.10	63.64	-10.36	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

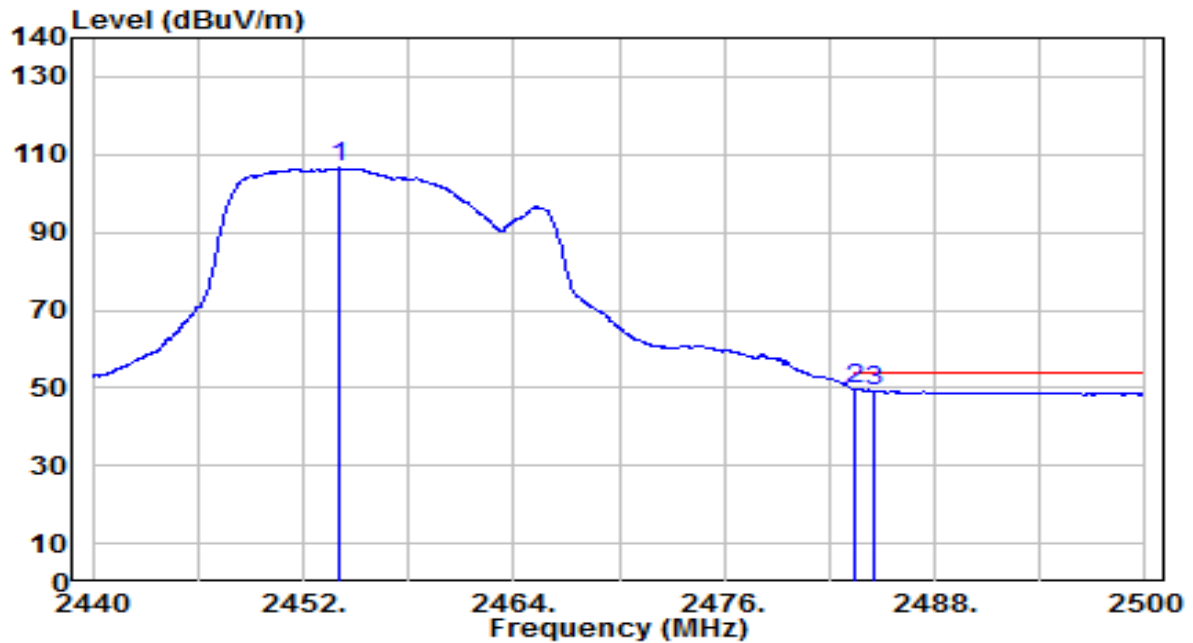


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.040	73.53	32.98	106.51	N/A	N/A	125	225	Average
2	*	2483.500	16.70	33.09	49.79	-4.21	54.00	125	225	Average
3		2484.520	16.05	33.10	49.15	-4.85	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

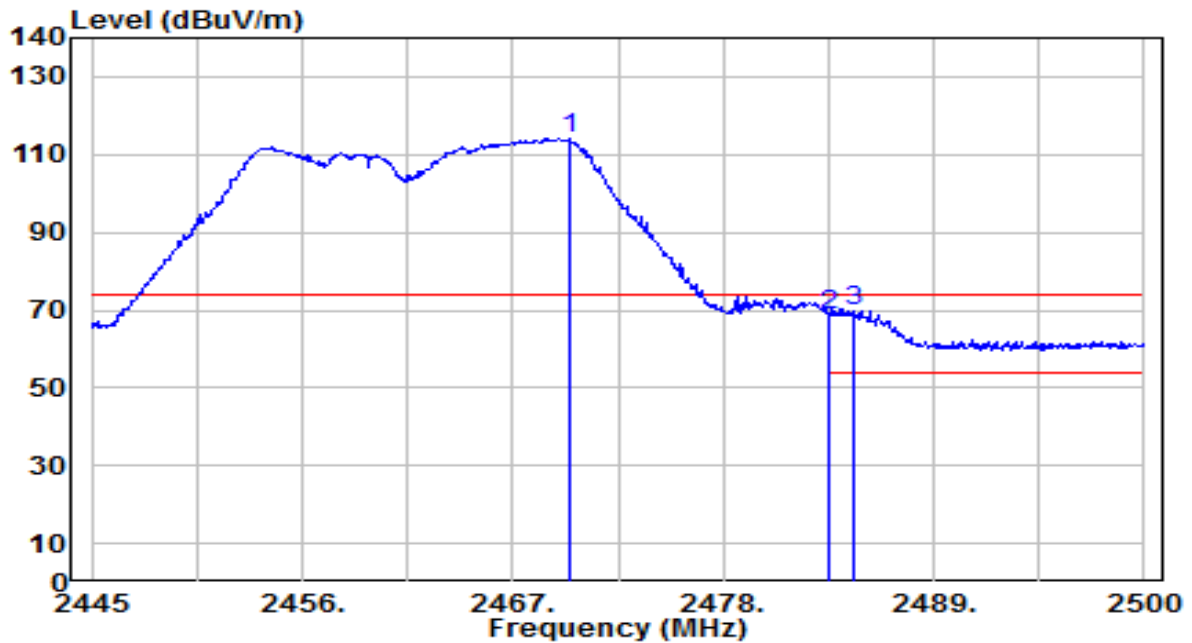


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.915	81.05	33.04	114.09	N/A	N/A	180	135	Peak
2	2483.500	35.70	33.09	68.80	-5.20	74.00	180	135	Peak
3	* 2484.875	36.78	33.10	69.88	-4.12	74.00	180	135	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

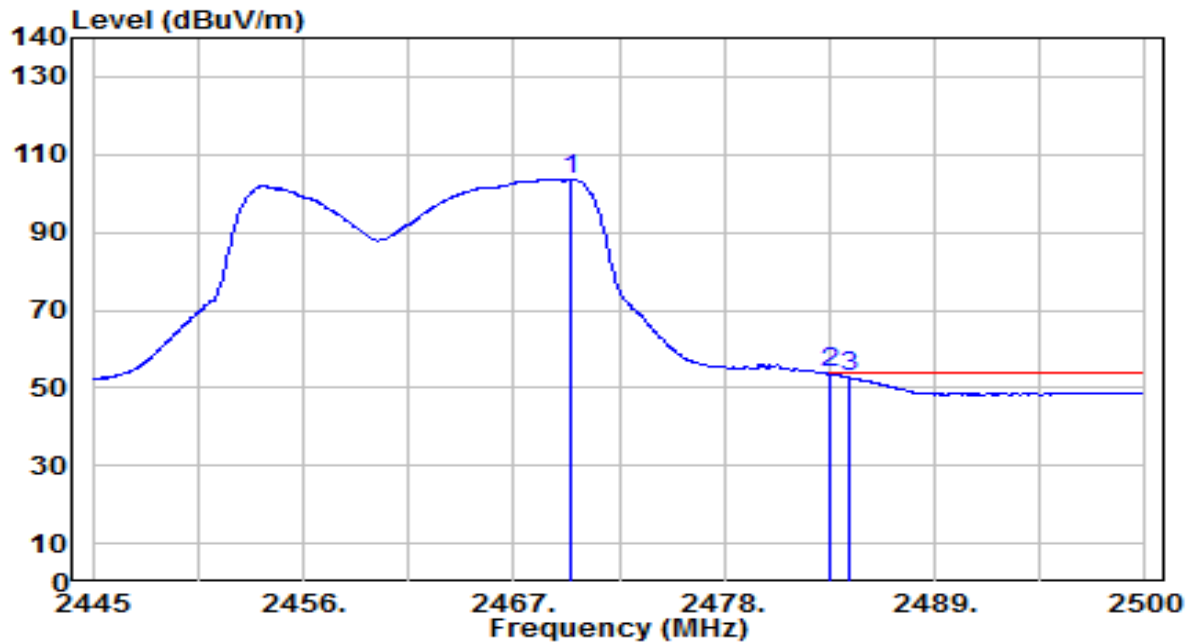


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2469.915	70.59	33.04	103.63	N/A	N/A	180	135	Average
2	*	2483.500	20.66	33.09	53.75	-0.25	54.00	180	135	Average
3		2484.490	19.65	33.10	52.75	-1.25	54.00	180	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

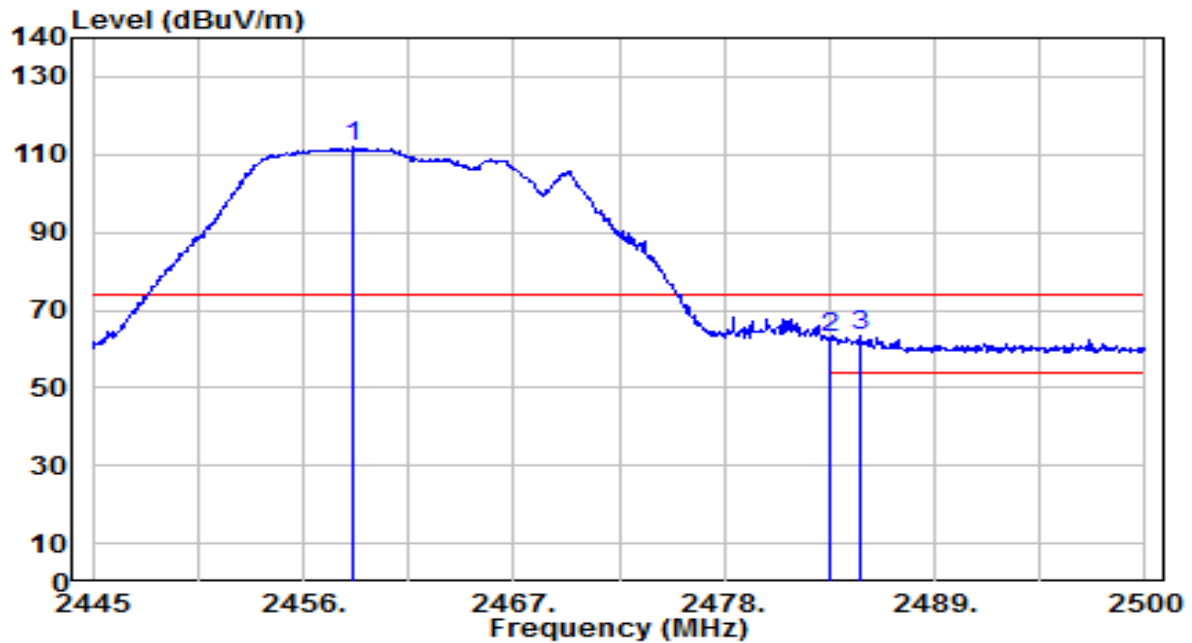


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.640	78.80	33.00	111.80	N/A	N/A	125	225	Peak
2	2483.500	29.65	33.09	62.74	-11.26	74.00	125	225	Peak
3	* 2485.095	30.43	33.10	63.53	-10.47	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

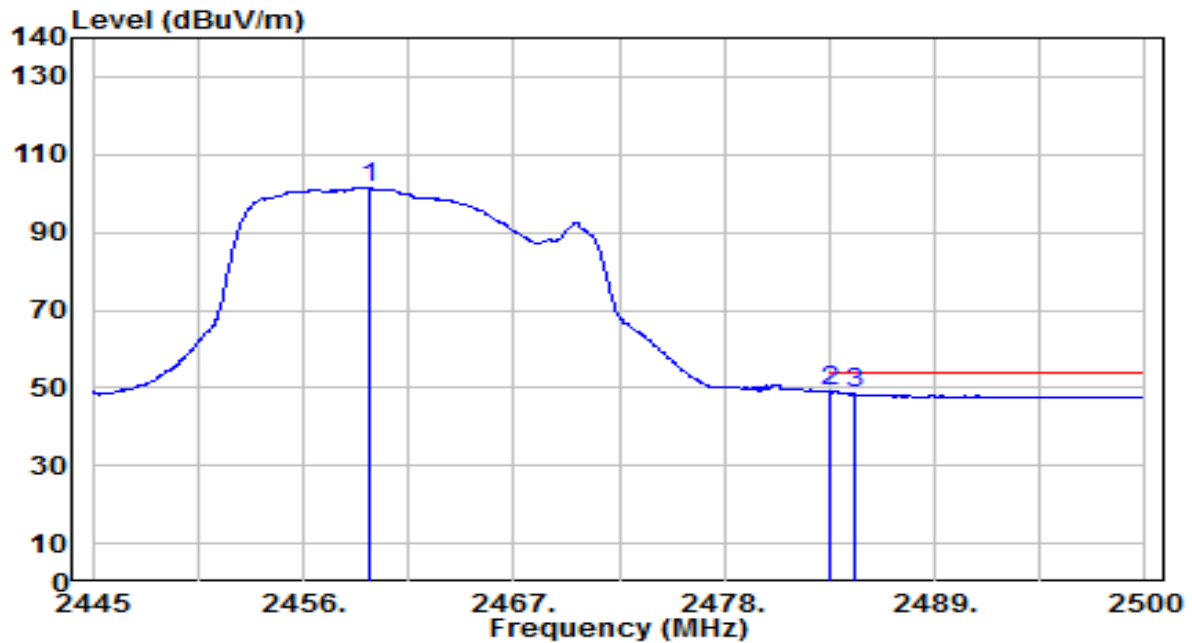


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.465	68.37	33.00	101.37	N/A	N/A	125	225	Average
2	*	2483.500	15.95	33.09	49.04	-4.96	54.00	125	225	Average
3		2484.765	15.41	33.10	48.51	-5.49	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

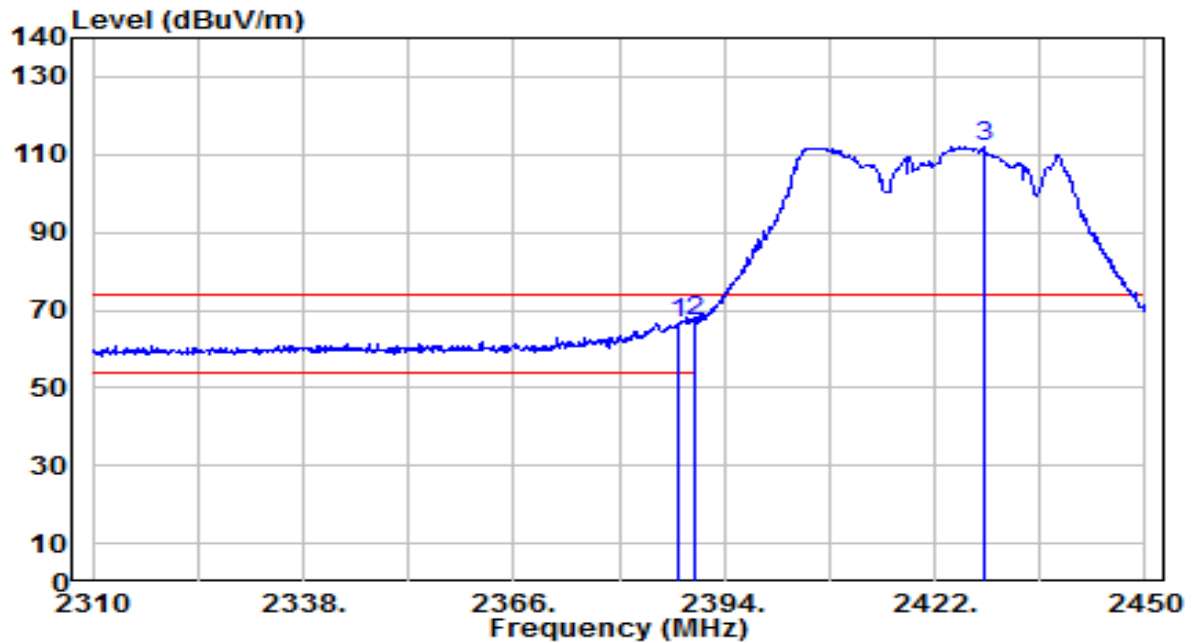


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.980	33.81	32.72	66.52	-7.48	74.00	190	235	Peak
2	*	2390.000	34.23	32.73	66.96	-7.04	74.00	190	235	Peak
3		2428.440	79.37	32.88	112.25	N/A	N/A	190	235	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

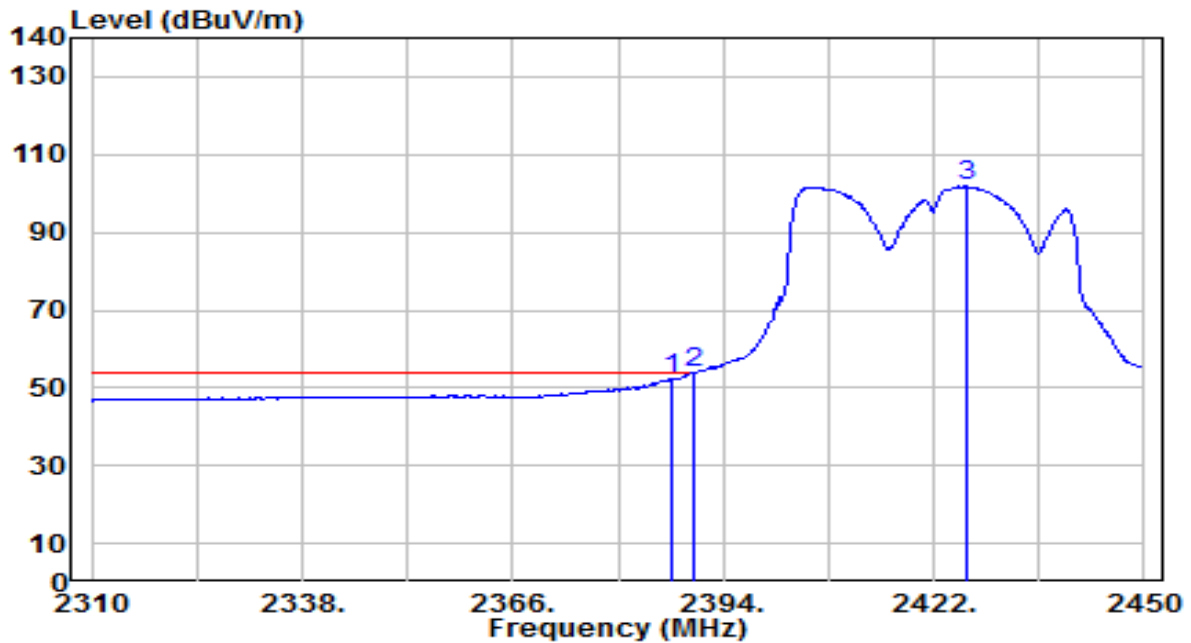


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.000	19.70	32.71	52.42	-1.58	54.00	190	235	Average
2	*	2390.000	21.02	32.73	53.75	-0.25	54.00	190	235	Average
3		2426.480	68.99	32.87	101.86	N/A	N/A	190	235	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

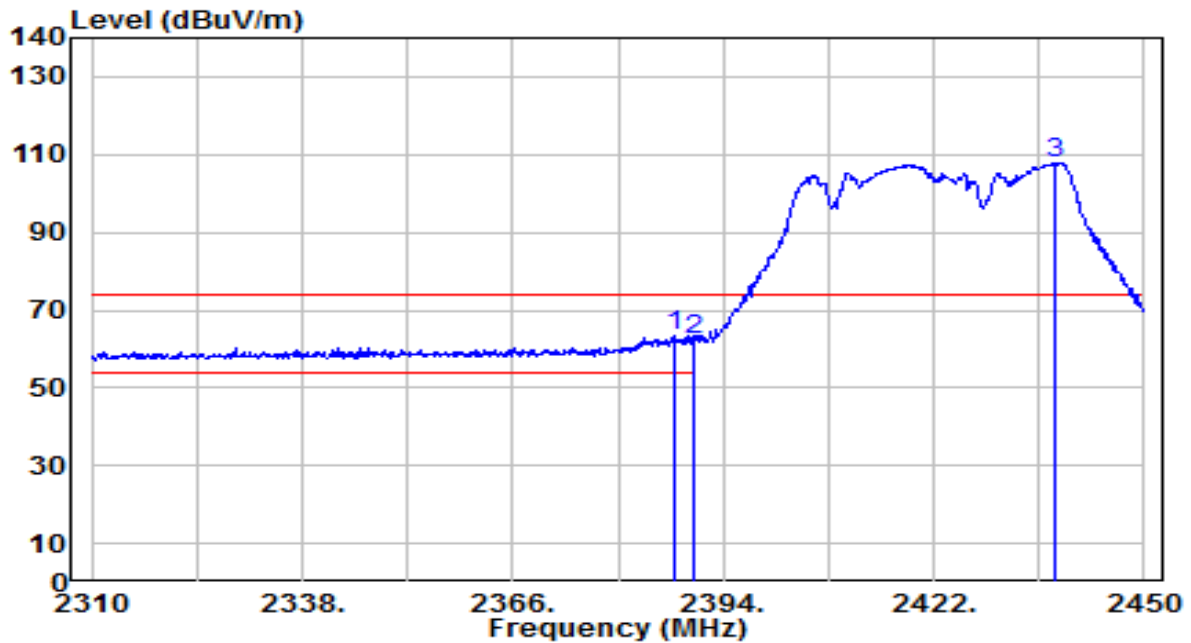


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.560	30.75	32.72	63.46	-10.54	74.00	125	230	Peak
2		2390.000	29.41	32.73	62.14	-11.86	74.00	125	230	Peak
3		2438.100	74.79	32.92	107.70	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

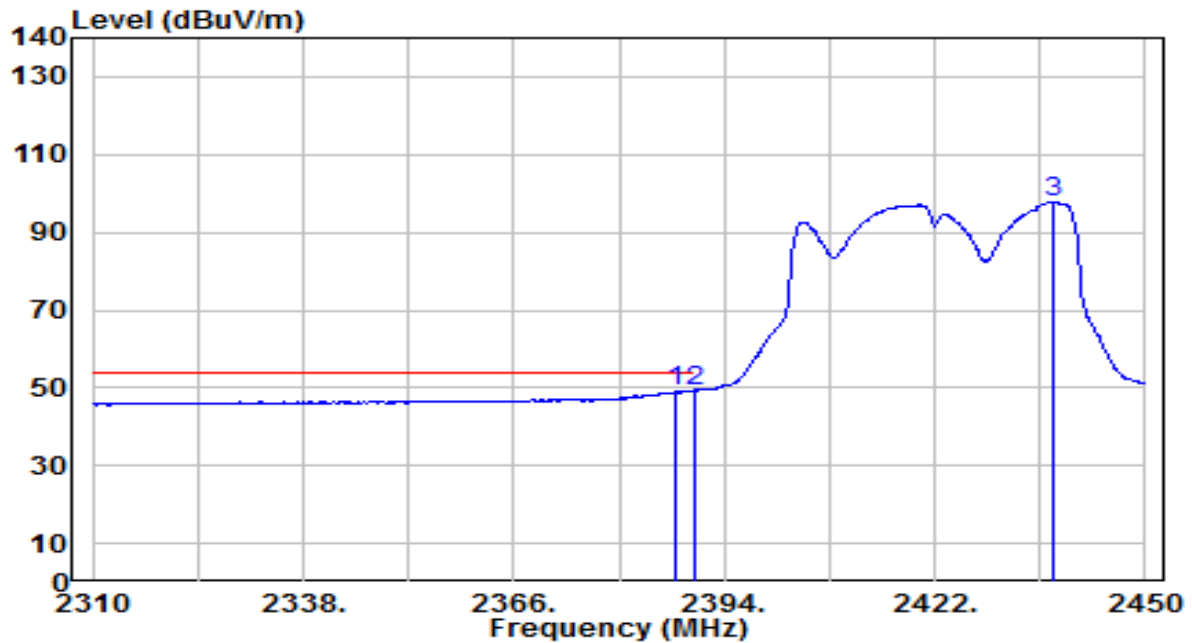


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.420	16.21	32.72	48.93	-5.07	54.00	125	230	Average
2	*	2390.000	16.58	32.73	49.30	-4.70	54.00	125	230	Average
3		2437.820	64.94	32.92	97.85	N/A	N/A	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

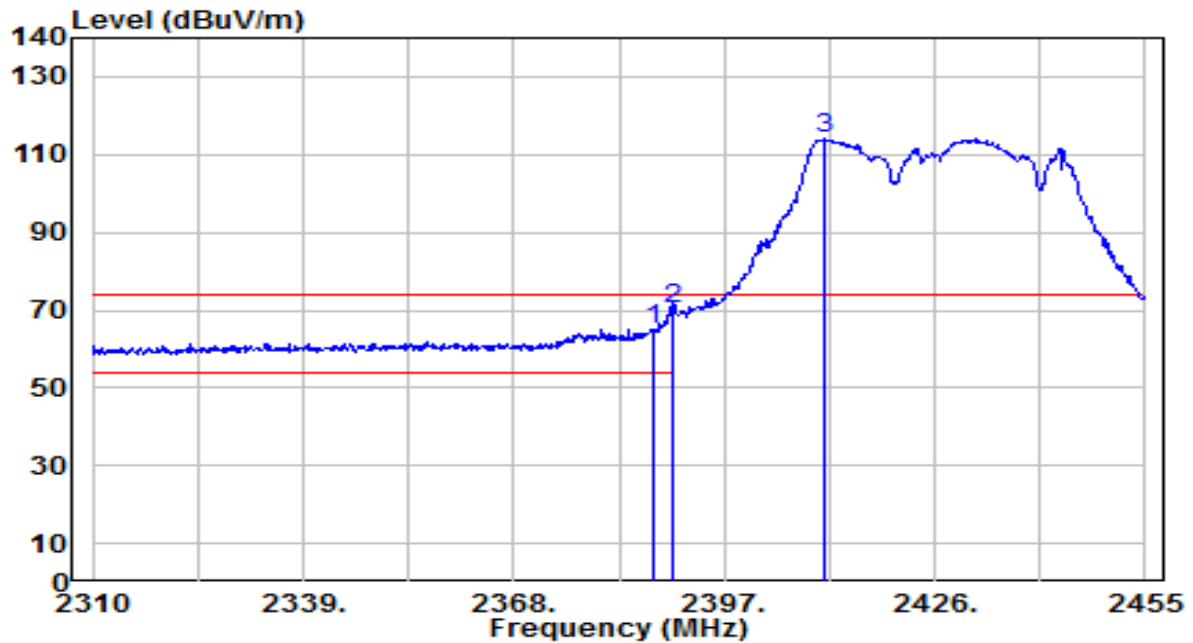


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.285	32.52	32.72	65.23	-8.77	74.00	190	235	Peak
2	*	2390.000	37.72	32.73	70.44	-3.56	74.00	190	235	Peak
3		2410.775	81.46	32.81	114.27	N/A	N/A	190	235	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

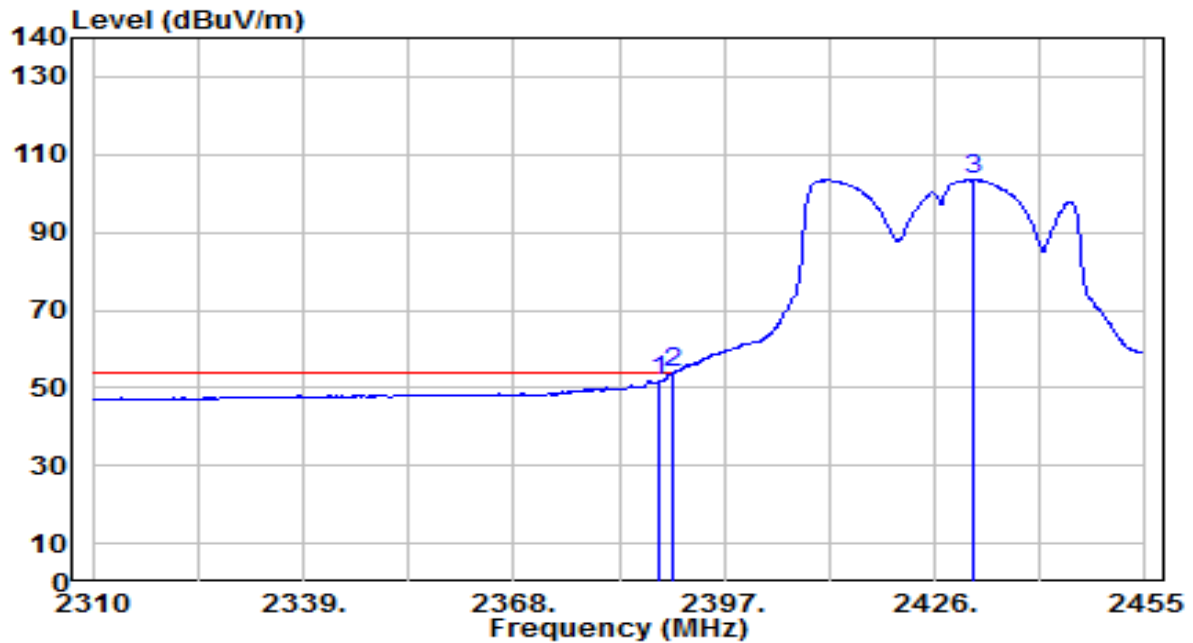


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.010	19.01	32.72	51.73	-2.27	54.00	190	235	Average
2	*	2390.000	21.16	32.73	53.89	-0.11	54.00	190	235	Average
3		2431.365	70.73	32.89	103.62	N/A	N/A	190	235	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

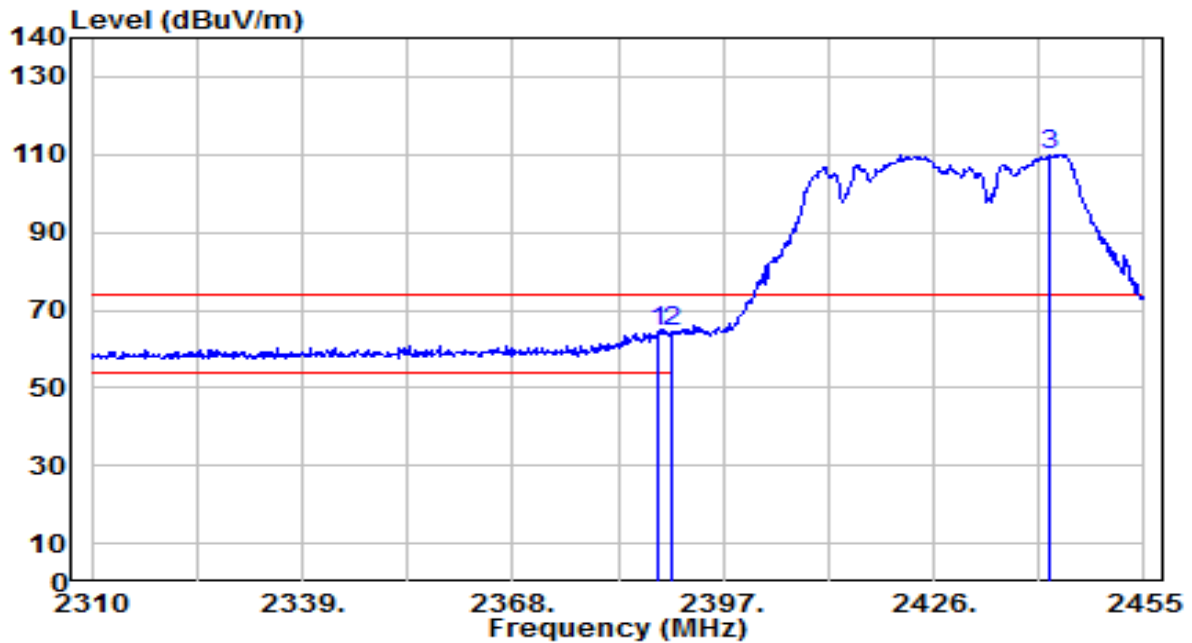


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.010	31.59	32.72	64.31	-9.69	74.00	125	230	Peak
2		2390.000	31.58	32.73	64.31	-9.69	74.00	125	230	Peak
3		2441.805	76.96	32.93	109.89	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

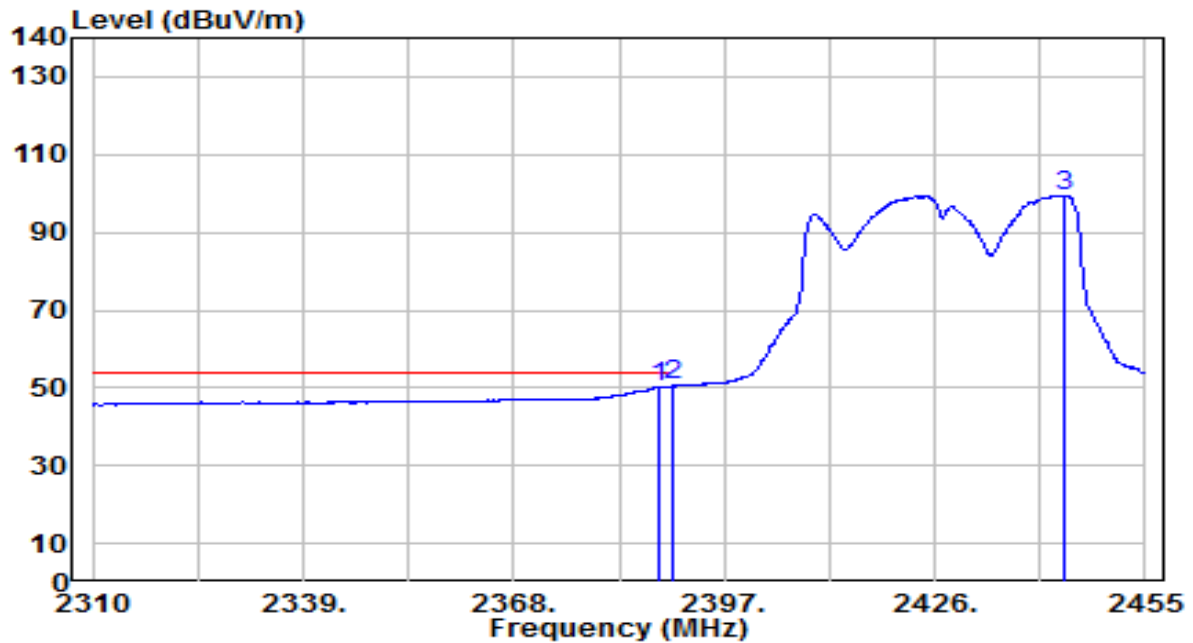


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.865	17.63	32.72	50.35	-3.65	54.00	125	230	Average
2	*	2390.000	17.90	32.73	50.63	-3.37	54.00	125	230	Average
3		2443.690	66.58	32.94	99.52	N/A	N/A	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

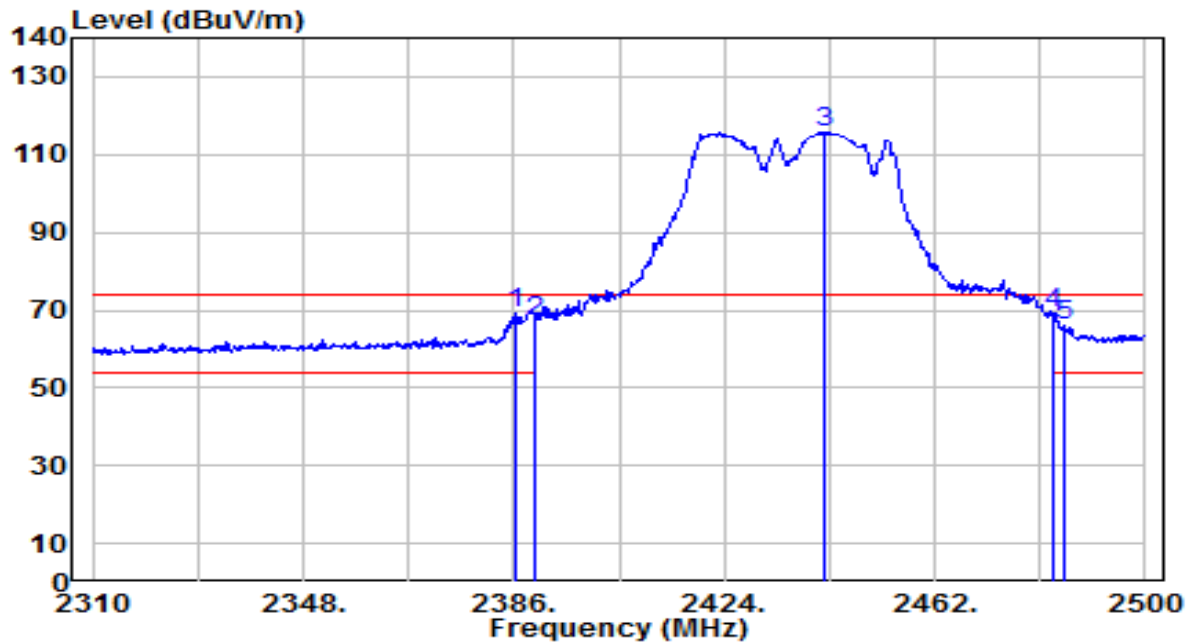


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	36.33	32.71	69.04	-4.96	74.00	155	230	Peak
2	2390.000	34.31	32.73	67.04	-6.96	74.00	155	230	Peak
3	2442.050	82.78	32.93	115.71	N/A	N/A	155	230	Peak
4	* 2483.500	36.30	33.09	69.40	-4.60	74.00	155	230	Peak
5	2485.180	32.82	33.10	65.92	-8.08	74.00	155	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

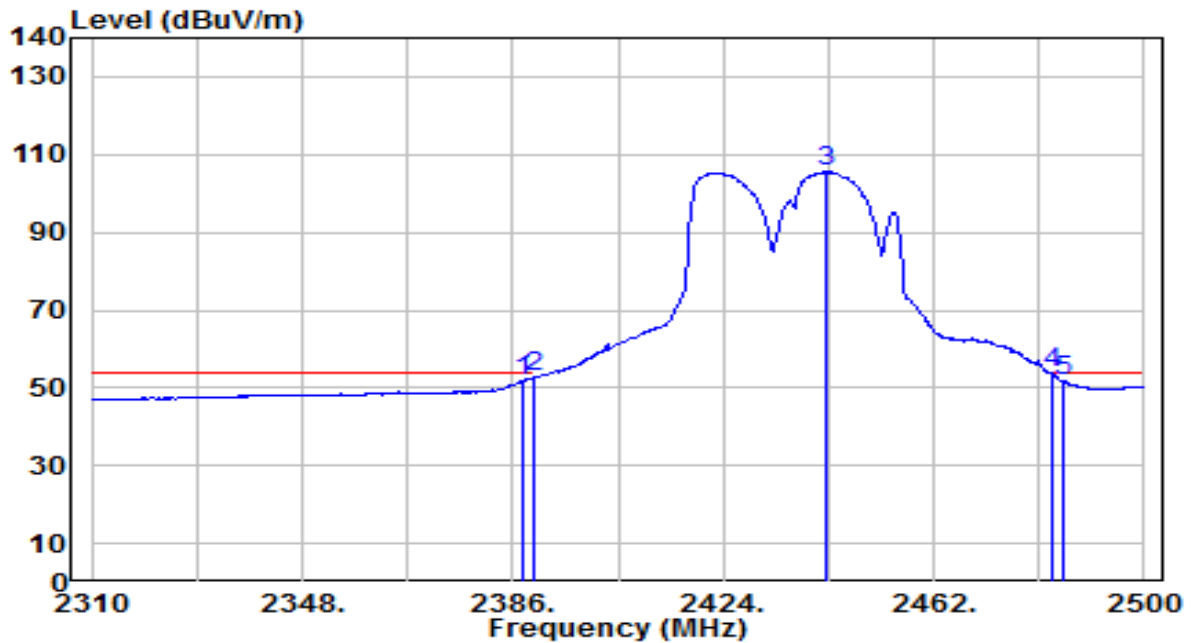


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	19.01	32.72	51.73	-2.27	54.00	155	230	Average
2	2390.000	20.13	32.73	52.86	-1.14	54.00	155	230	Average
3	2442.620	72.66	32.93	105.60	N/A	N/A	155	230	Average
4	* 2483.500	20.61	33.09	53.70	-0.30	54.00	155	230	Average
5	2485.180	18.76	33.10	51.86	-2.14	54.00	155	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

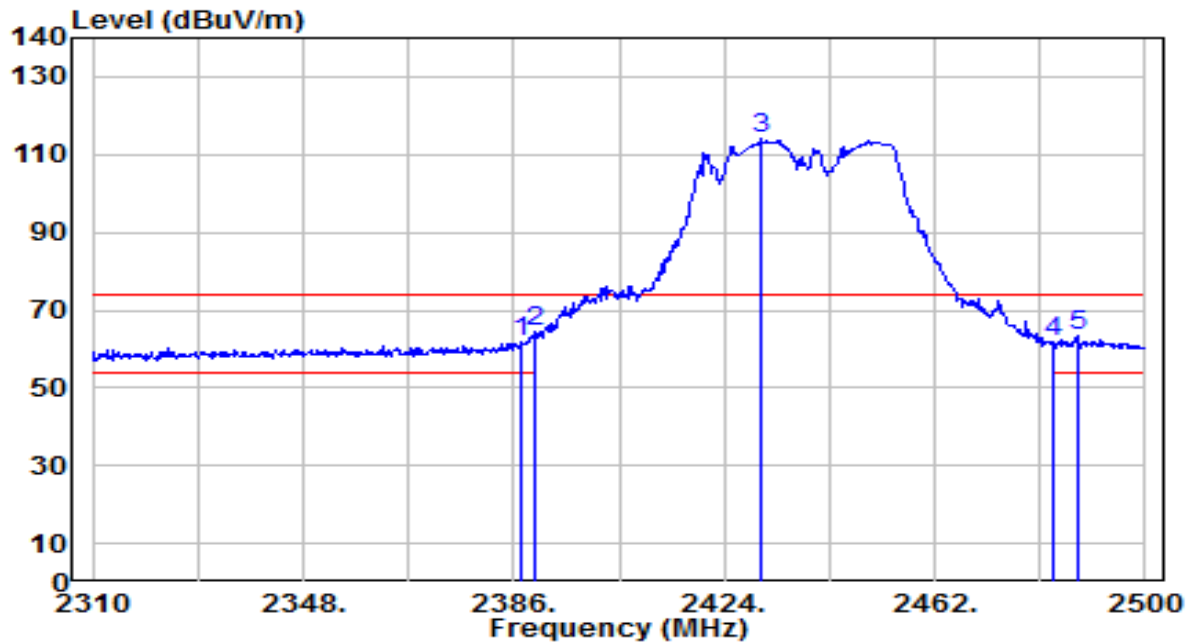


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.330	28.85	32.72	61.56	-12.44	74.00	265	155	Peak
2	*	2390.000	31.50	32.73	64.23	-9.77	74.00	265	155	Peak
3		2430.650	80.98	32.89	113.87	N/A	N/A	265	155	Peak
4		2483.500	28.46	33.09	61.55	-12.45	74.00	265	155	Peak
5		2487.650	30.02	33.11	63.13	-10.87	74.00	265	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

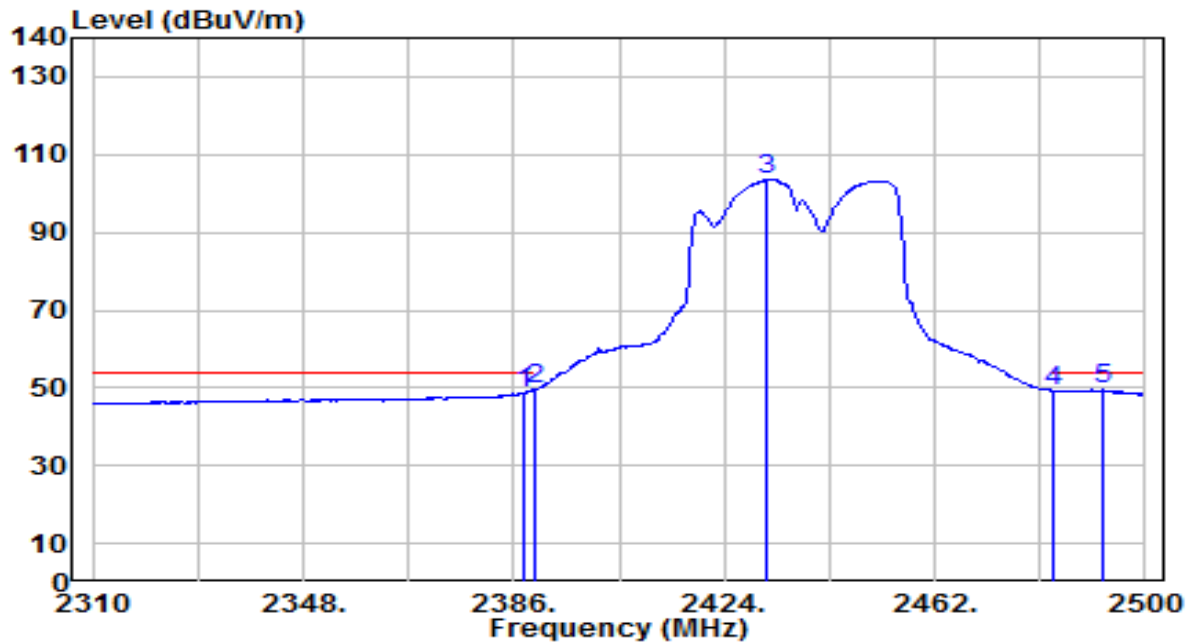


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.900	15.92	32.72	48.64	-5.36	54.00	265	155	Average
2	*	2390.000	16.88	32.73	49.61	-4.39	54.00	265	155	Average
3		2431.410	70.52	32.89	103.41	N/A	N/A	265	155	Average
4		2483.500	16.24	33.09	49.33	-4.67	54.00	265	155	Average
5		2492.400	16.44	33.13	49.57	-4.43	54.00	265	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

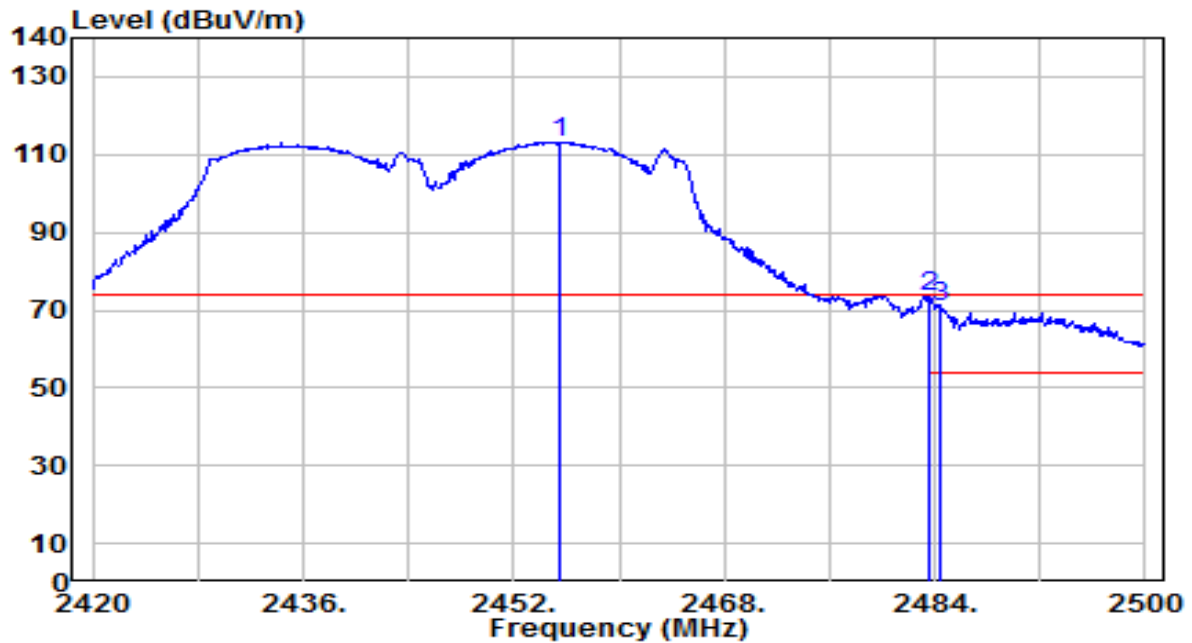


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.520	80.29	32.98	113.28	N/A	N/A	180	135	Peak
2	*	2483.500	40.35	33.09	73.44	-0.56	74.00	180	135	Peak
3		2484.480	37.81	33.10	70.91	-3.09	74.00	180	135	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

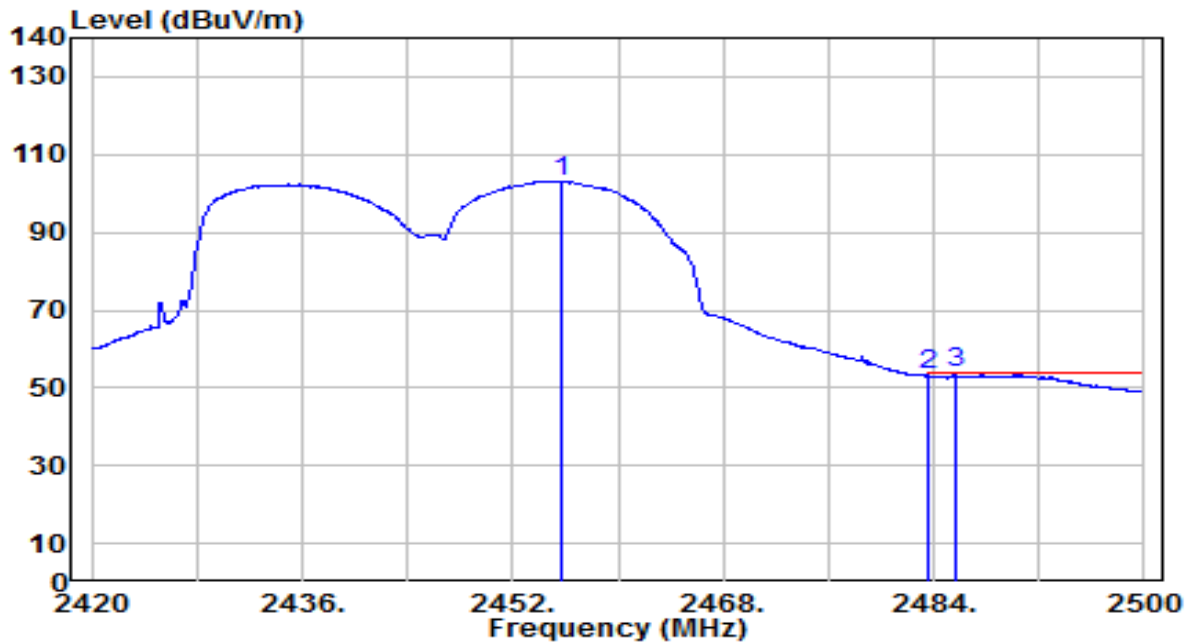


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.760	70.30	32.99	103.28	N/A	N/A	180	135	Average
2	2483.500	20.09	33.09	53.19	-0.81	54.00	180	135	Average
3	* 2485.600	20.67	33.10	53.77	-0.23	54.00	180	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

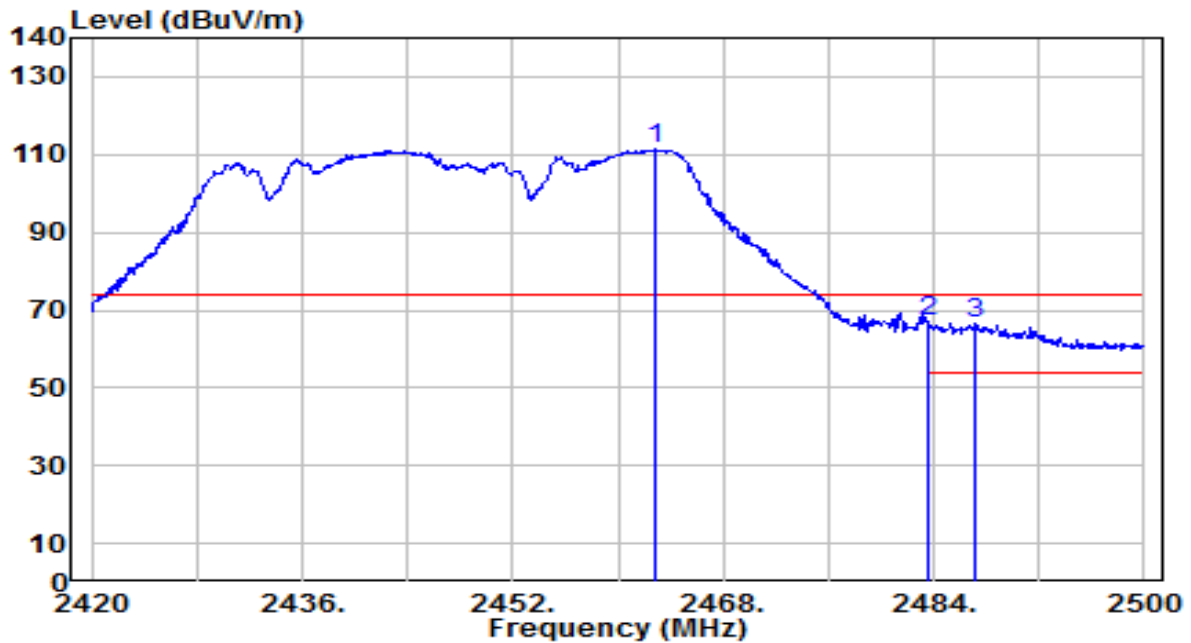


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.880	78.63	33.01	111.65	N/A	N/A	125	225	Peak
2	*	2483.500	33.87	33.09	66.97	-7.03	74.00	125	225	Peak
3		2487.200	33.24	33.11	66.35	-7.65	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

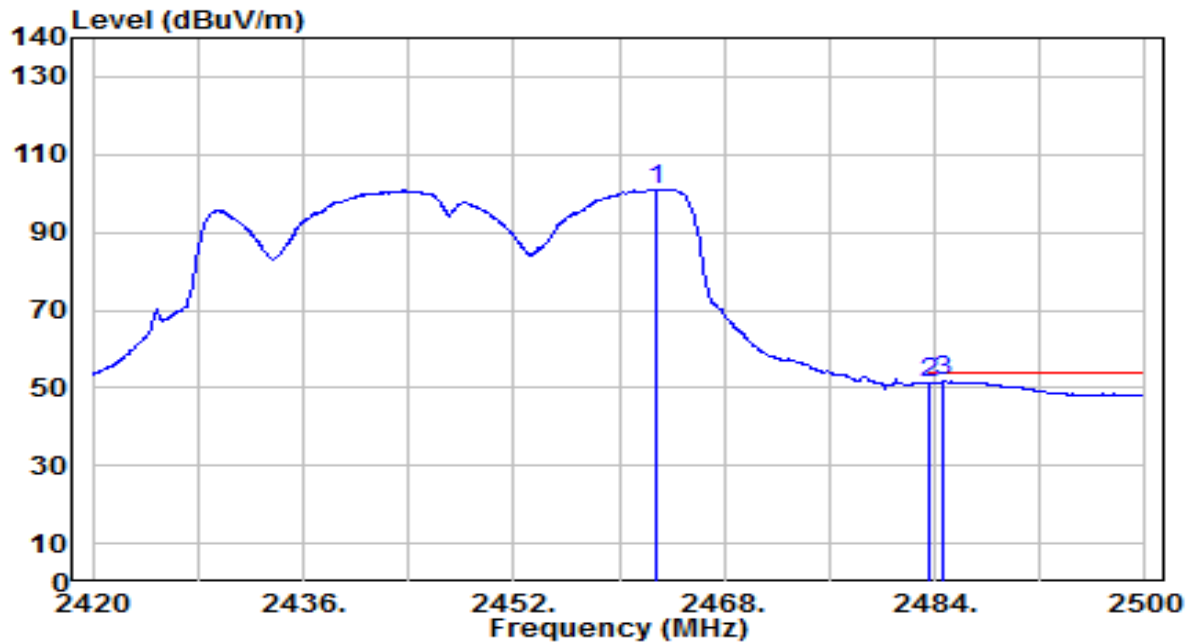


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.800	67.96	33.01	100.97	N/A	N/A	125	225	Average
2	2483.500	18.16	33.09	51.26	-2.74	54.00	125	225	Average
3	* 2484.560	18.49	33.10	51.59	-2.41	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

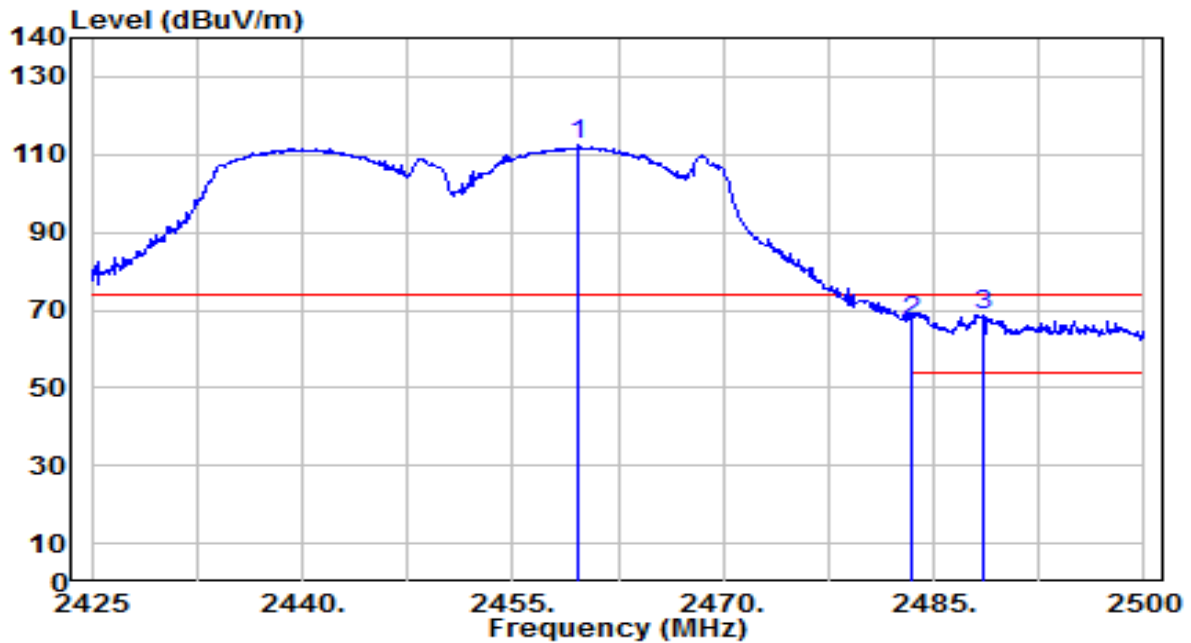


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.650	79.28	33.00	112.28	N/A	N/A	180	135	Peak
2	2483.500	34.13	33.09	67.23	-6.77	74.00	180	135	Peak
3	* 2488.450	35.62	33.11	68.73	-5.27	74.00	180	135	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

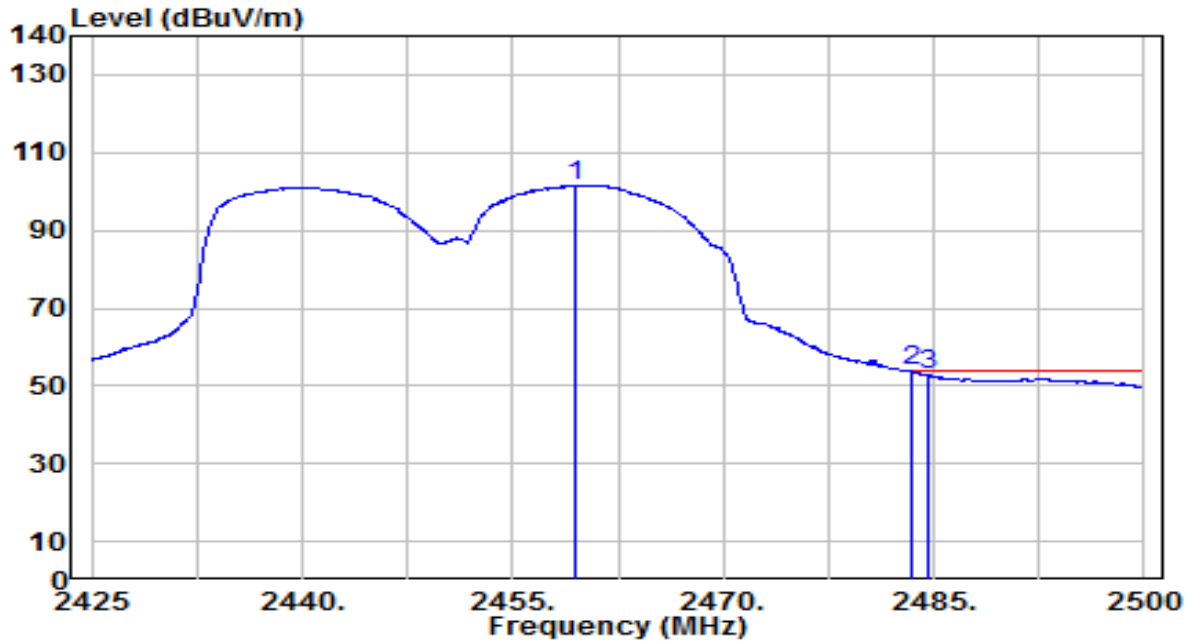


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.425	68.65	33.00	101.65	N/A	N/A	180	135	Average
2	*	2483.500	20.62	33.09	53.71	-0.29	54.00	180	135	Average
3		2484.550	19.52	33.10	52.62	-1.38	54.00	180	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

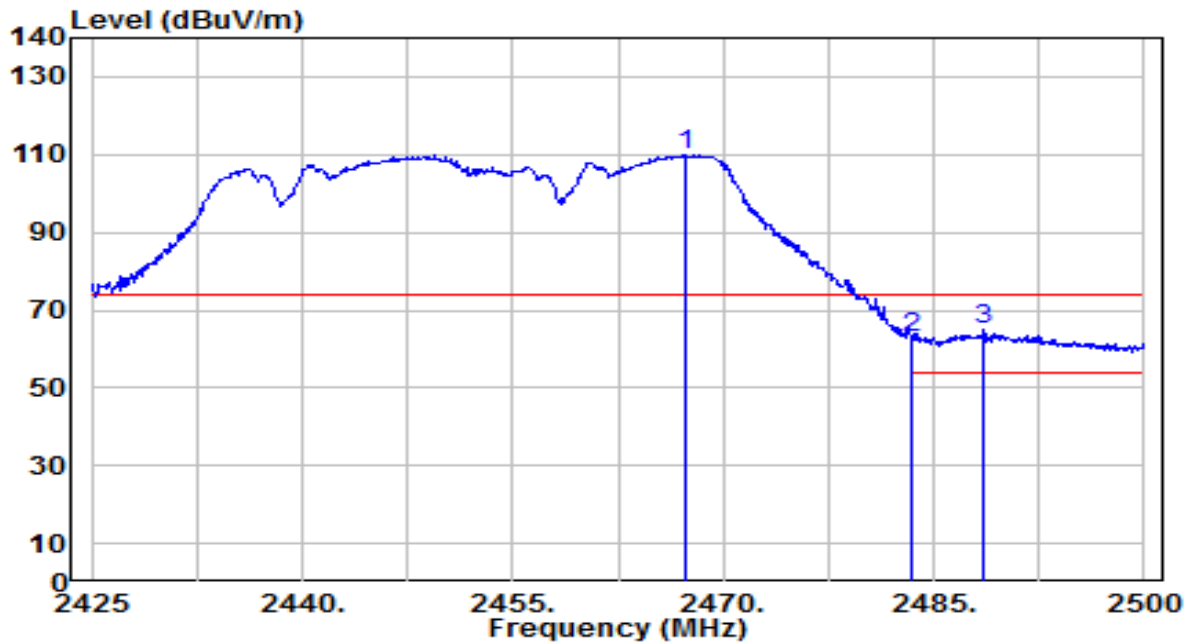


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.300	77.06	33.03	110.09	N/A	N/A	125	225	Peak
2	2483.500	29.55	33.09	62.65	-11.35	74.00	125	225	Peak
3	* 2488.600	31.65	33.12	64.76	-9.24	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

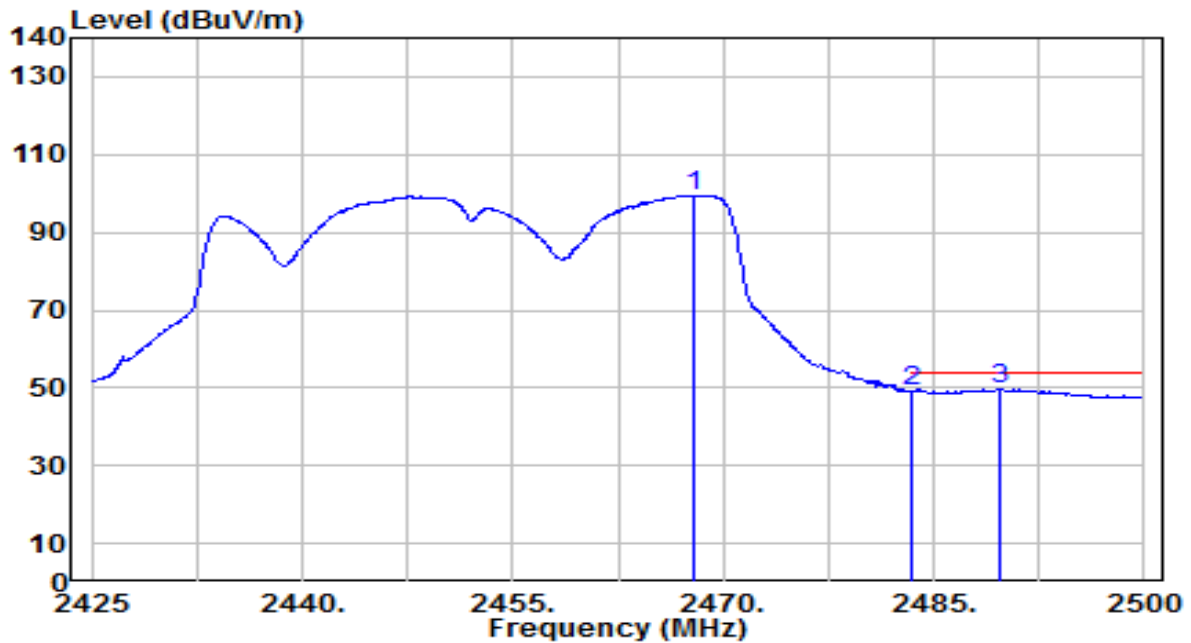


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.900	66.54	33.03	99.58	N/A	N/A	125	225	Average
2	2483.500	16.24	33.09	49.34	-4.66	54.00	125	225	Average
3	* 2489.800	16.38	33.12	49.50	-4.50	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

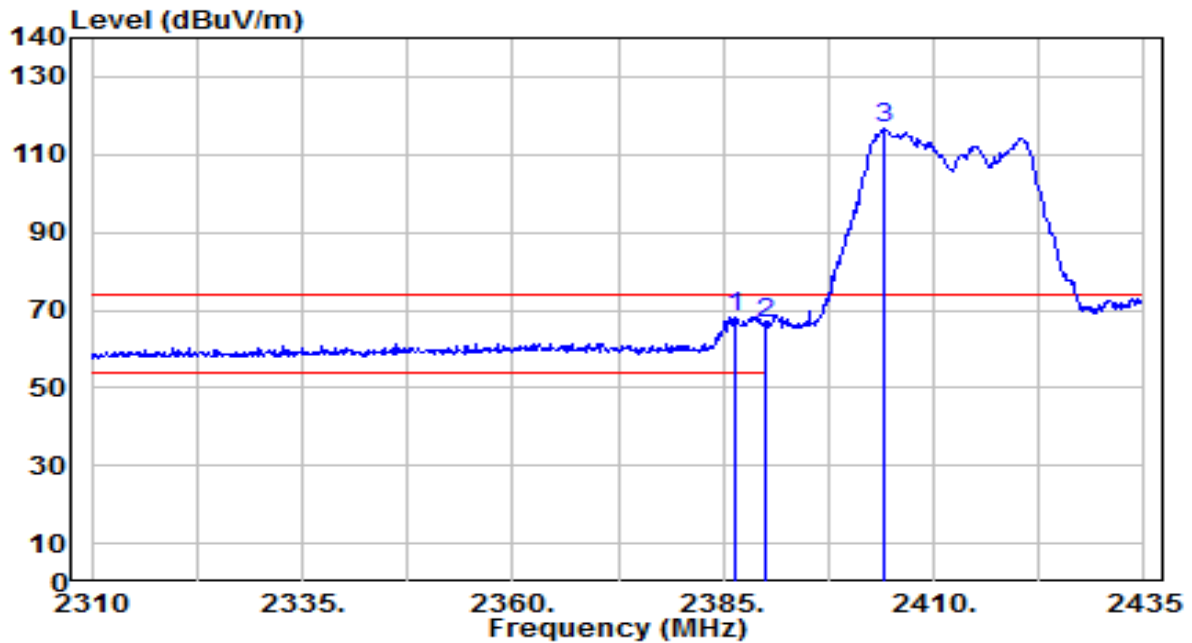


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.500	35.31	32.71	68.02	-5.98	74.00	100	135	Peak
2		2390.000	33.60	32.73	66.32	-7.68	74.00	100	135	Peak
3		2404.125	83.76	32.78	116.55	N/A	N/A	100	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

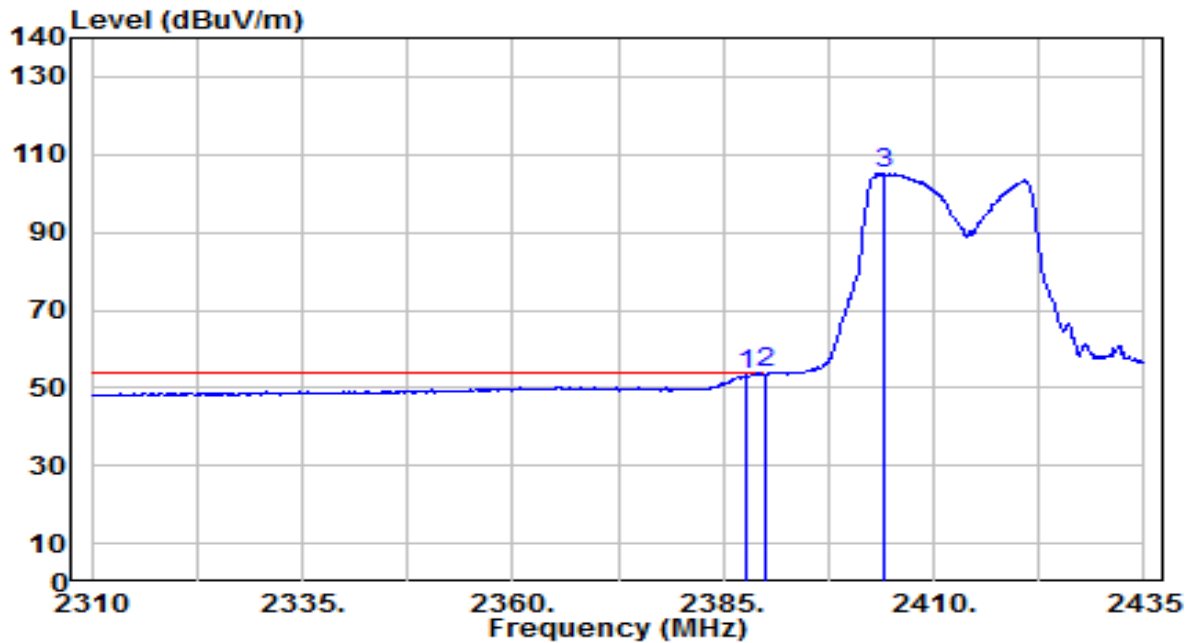


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.625	20.64	32.72	53.36	-0.64	54.00	100	135	Average
2	*	2390.000	20.99	32.73	53.71	-0.29	54.00	100	135	Average
3		2404.125	72.52	32.78	105.31	N/A	N/A	100	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

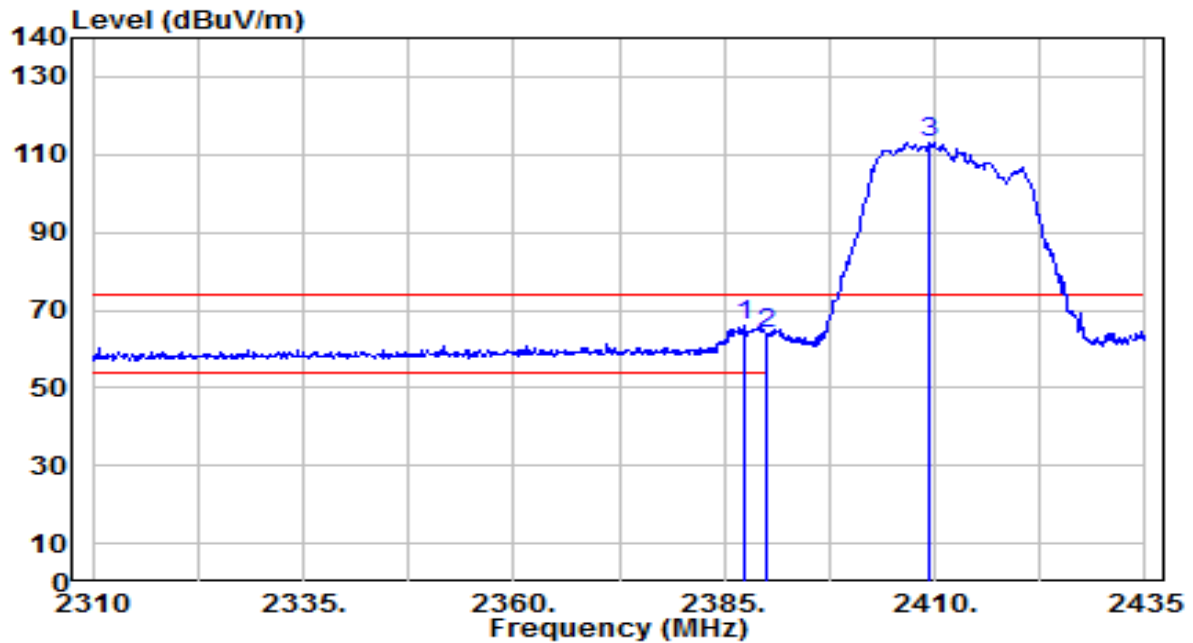


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.250	33.36	32.72	66.07	-7.93	74.00	125	230	Peak
2		2390.000	31.17	32.73	63.90	-10.10	74.00	125	230	Peak
3		2409.375	80.28	32.80	113.08	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

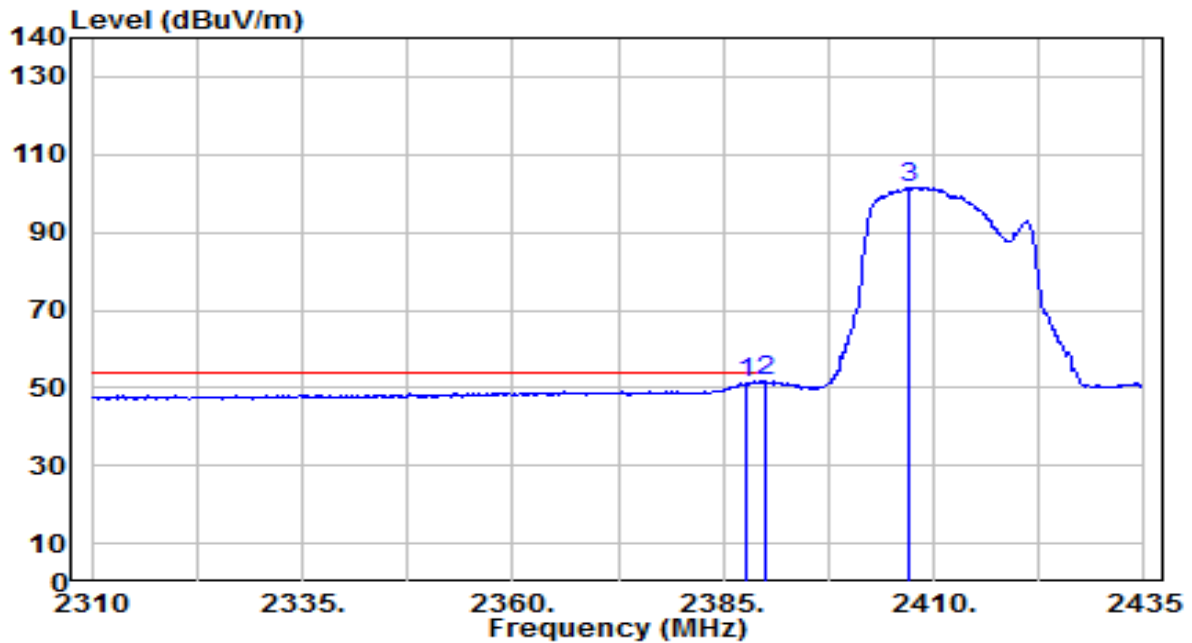


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.875	18.35	32.72	51.07	-2.93	54.00	125	230	Average
2	*	2390.000	19.01	32.73	51.74	-2.26	54.00	125	230	Average
3		2407.125	68.89	32.79	101.68	N/A	N/A	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

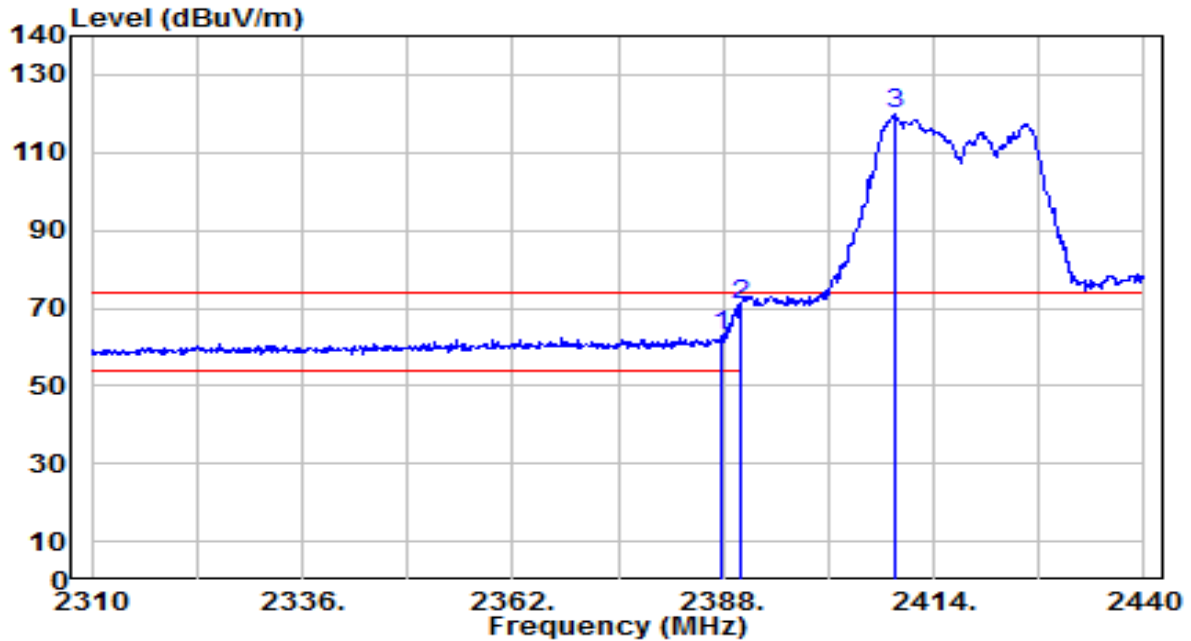


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.740	30.01	32.72	62.73	-11.27	74.00	100	135	Peak
2	*	2390.000	37.94	32.73	70.66	-3.34	74.00	100	135	Peak
3		2409.190	87.16	32.80	119.96	N/A	N/A	100	135	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

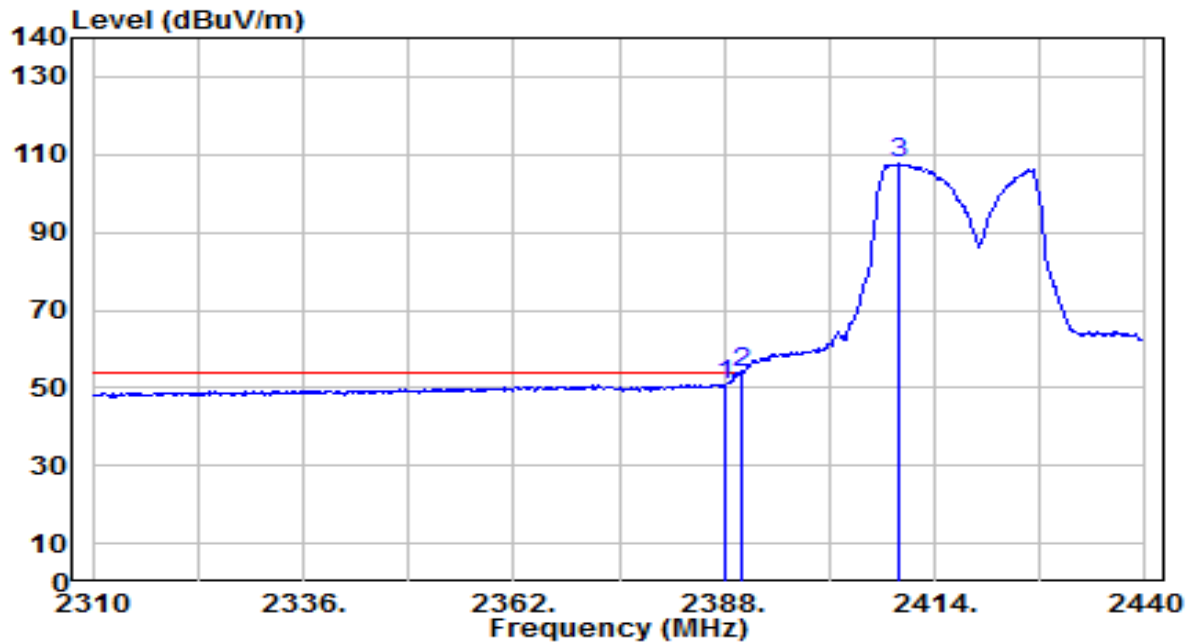


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	18.26	32.72	50.98	-3.02	54.00	100	135	Average
2	*	2390.000	21.13	32.73	53.86	-0.14	54.00	100	135	Average
3		2409.580	74.73	32.80	107.53	N/A	N/A	100	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

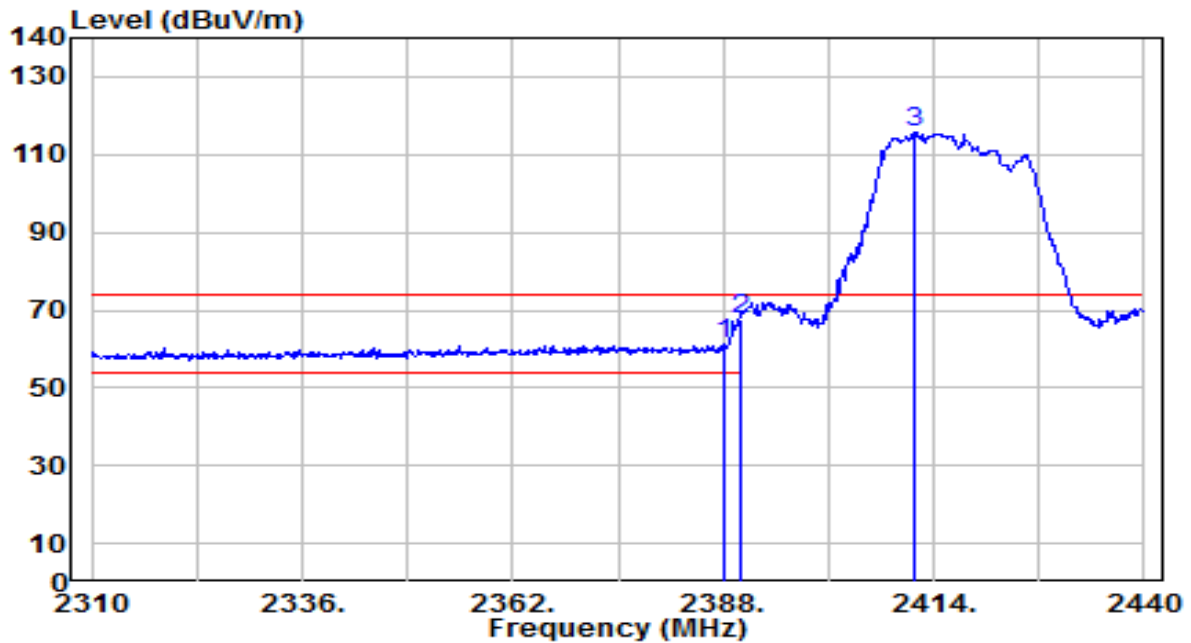


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	28.53	32.72	61.24	-12.76	74.00	125	230	Peak
2	*	2390.000	34.86	32.73	67.59	-6.41	74.00	125	230	Peak
3		2411.530	83.02	32.81	115.84	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

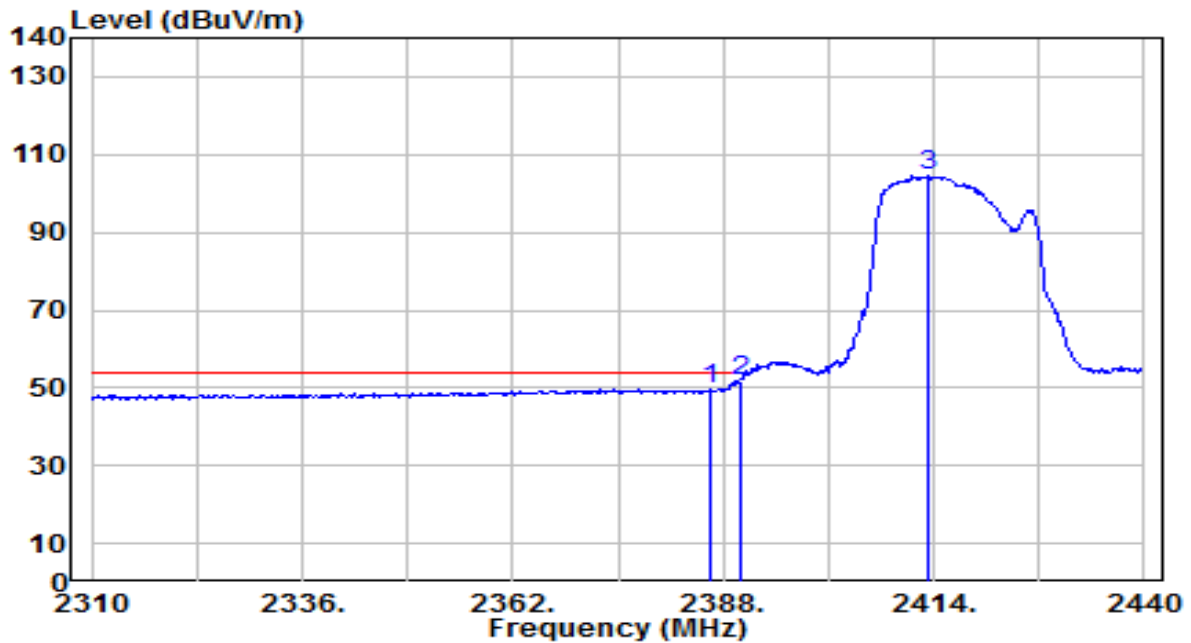


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.570	16.95	32.71	49.67	-4.33	54.00	125	230	Average
2	*	2390.000	19.26	32.73	51.99	-2.01	54.00	125	230	Average
3		2413.480	71.69	32.82	104.51	N/A	N/A	125	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

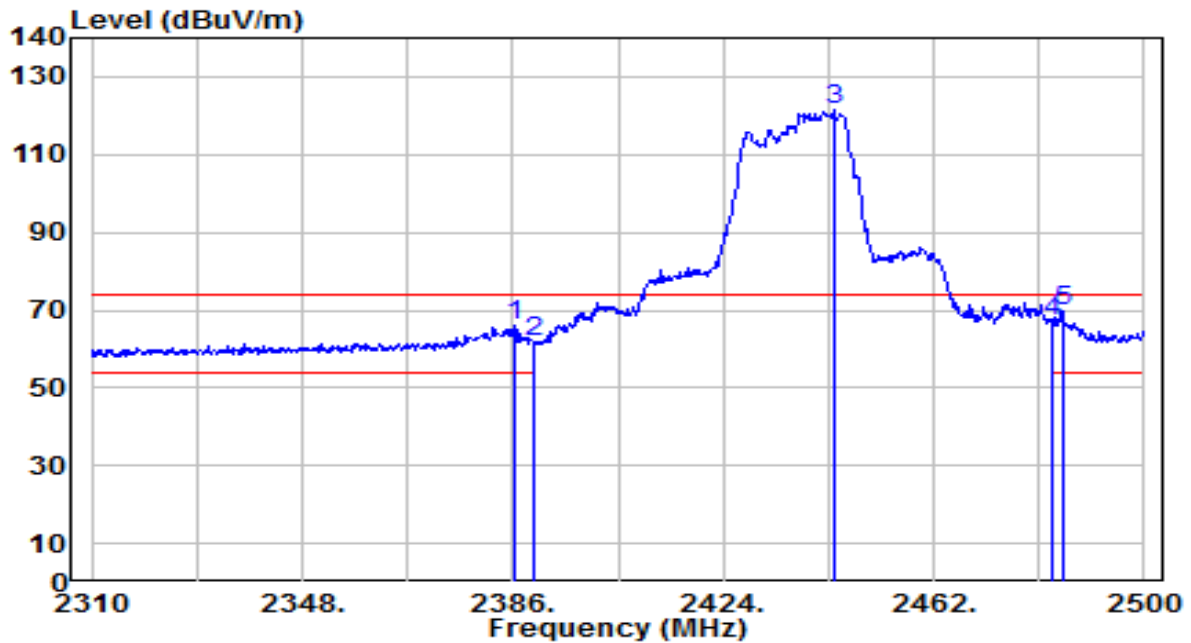


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	33.30	32.71	66.02	-7.98	74.00	225	135	Peak
2	2390.000	29.18	32.73	61.91	-12.09	74.00	225	135	Peak
3	2443.950	88.36	32.94	121.30	N/A	N/A	225	135	Peak
4	2483.500	33.91	33.09	67.00	-7.00	74.00	225	135	Peak
5	* 2485.180	36.61	33.10	69.71	-4.29	74.00	225	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

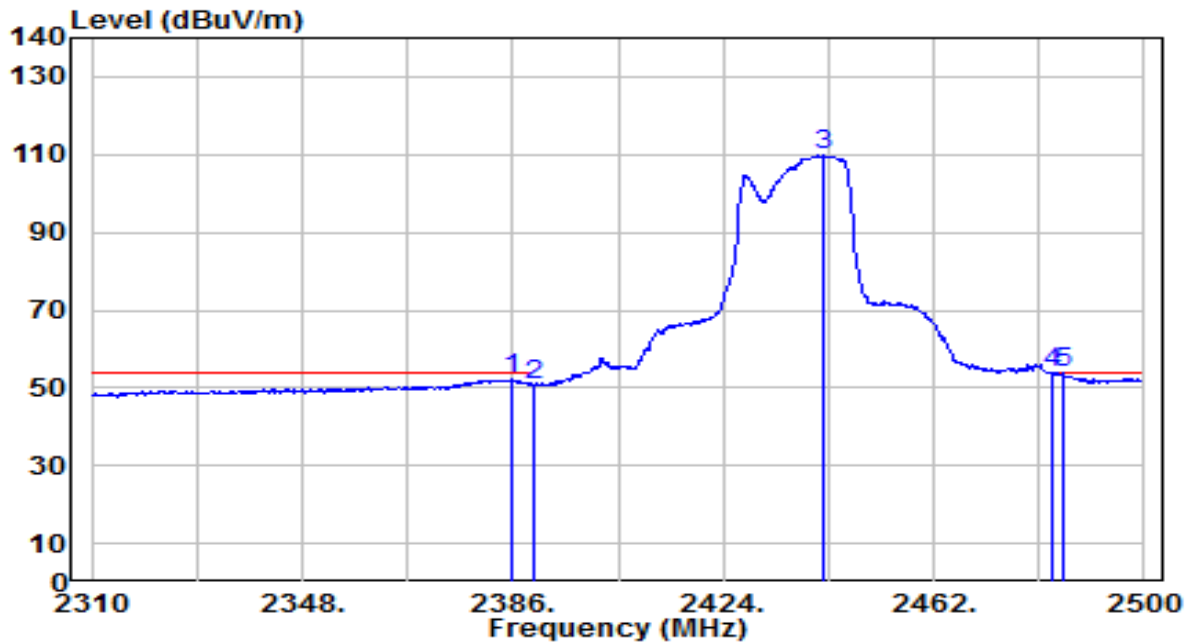


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	19.35	32.71	52.05	-1.95	54.00	225	135	Average
2	2390.000	18.15	32.73	50.87	-3.13	54.00	225	135	Average
3	2442.050	76.78	32.93	109.71	N/A	N/A	225	135	Average
4	* 2483.500	20.72	33.09	53.82	-0.18	54.00	225	135	Average
5	2485.180	20.62	33.10	53.72	-0.28	54.00	225	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

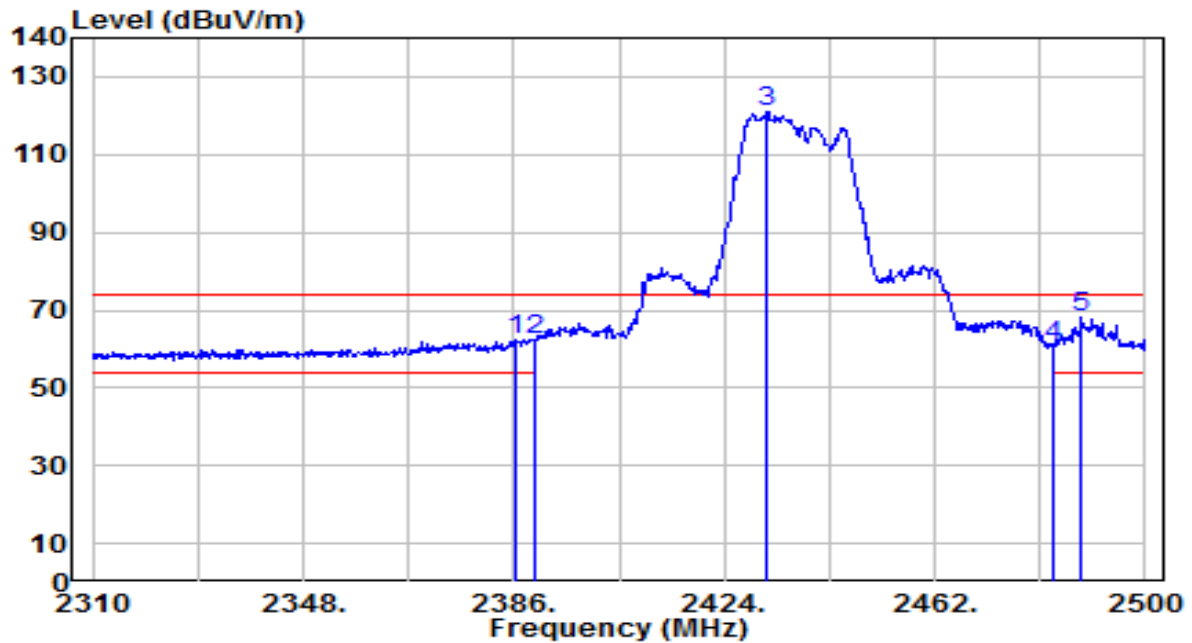


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	29.64	32.71	62.35	-11.65	74.00	265	155	Peak
2	2390.000	29.82	32.73	62.55	-11.45	74.00	265	155	Peak
3	2431.790	88.29	32.89	121.18	N/A	N/A	265	155	Peak
4	2483.500	27.58	33.09	60.68	-13.32	74.00	265	155	Peak
5	* 2488.410	35.20	33.11	68.31	-5.69	74.00	265	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

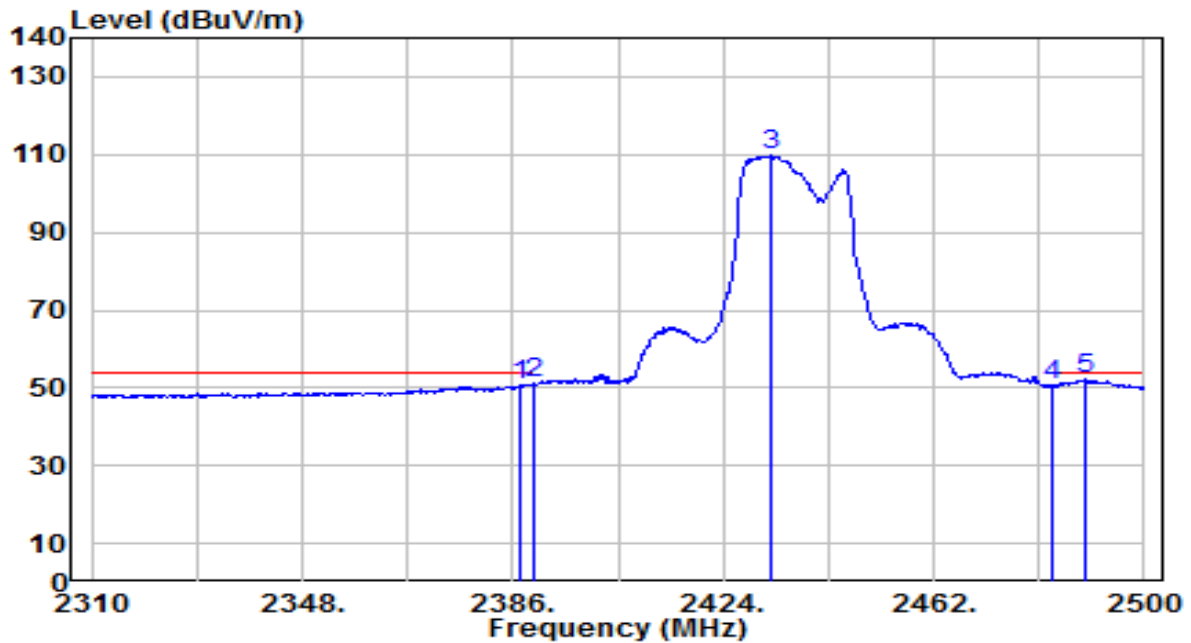


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	18.18	32.72	50.90	-3.10	54.00	265	155	Average
2	2390.000	18.34	32.73	51.06	-2.94	54.00	265	155	Average
3	2432.740	76.77	32.90	109.67	N/A	N/A	265	155	Average
4	2483.500	17.44	33.09	50.53	-3.47	54.00	265	155	Average
5	* 2489.360	18.97	33.12	52.09	-1.91	54.00	265	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

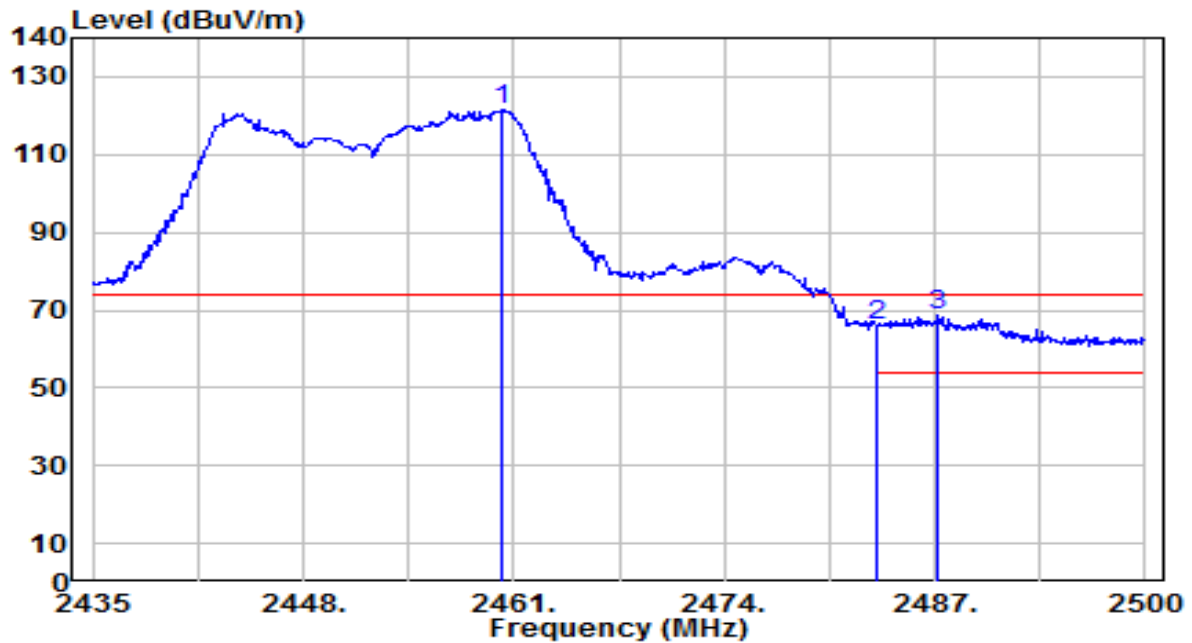


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.220	88.38	33.00	121.38	N/A	N/A	160	140	Peak
2	2483.500	32.93	33.09	66.03	-7.97	74.00	160	140	Peak
3	* 2487.195	35.54	33.11	68.65	-5.35	74.00	160	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

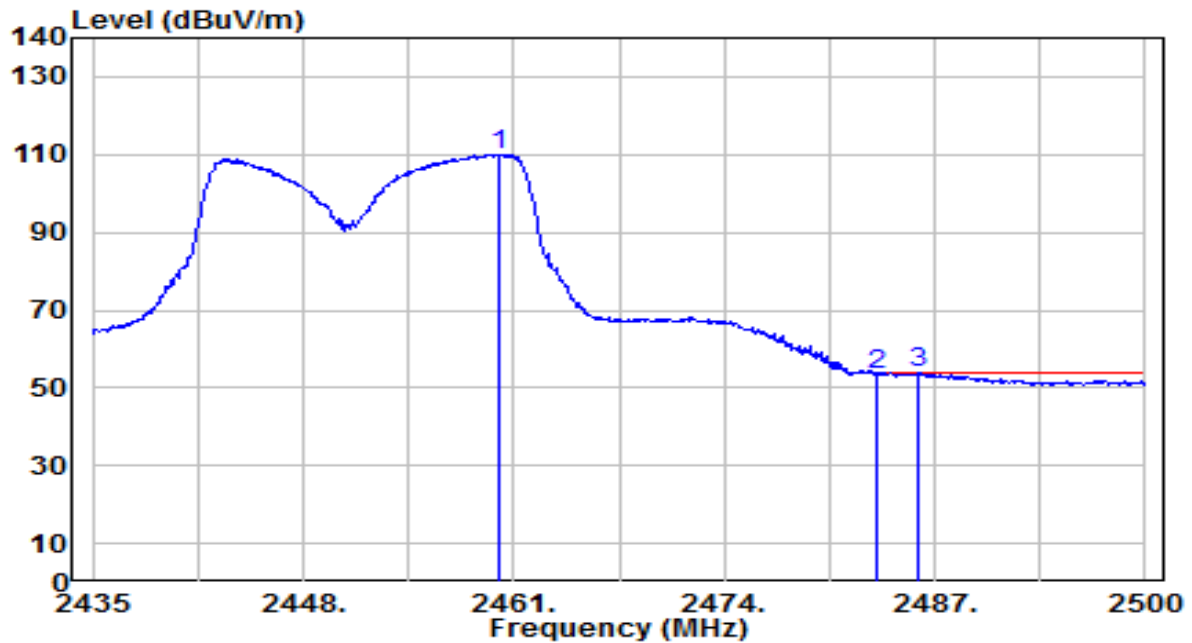


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.025	77.08	33.00	110.09	N/A	N/A	160	140	Average
2	2483.500	20.36	33.09	53.46	-0.54	54.00	160	140	Average
3	* 2486.025	20.69	33.10	53.79	-0.21	54.00	160	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

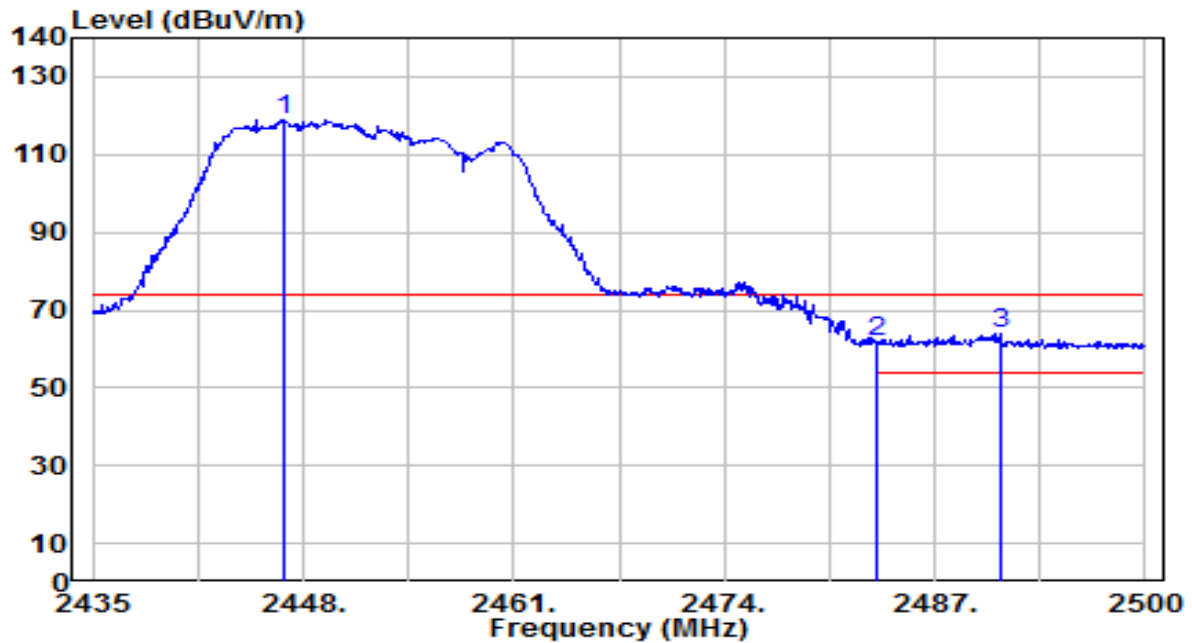


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2446.765	85.90	32.95	118.85	N/A	N/A	125	225	Peak
2	2483.500	28.73	33.09	61.82	-12.18	74.00	125	225	Peak
3	* 2491.030	30.60	33.12	63.73	-10.27	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

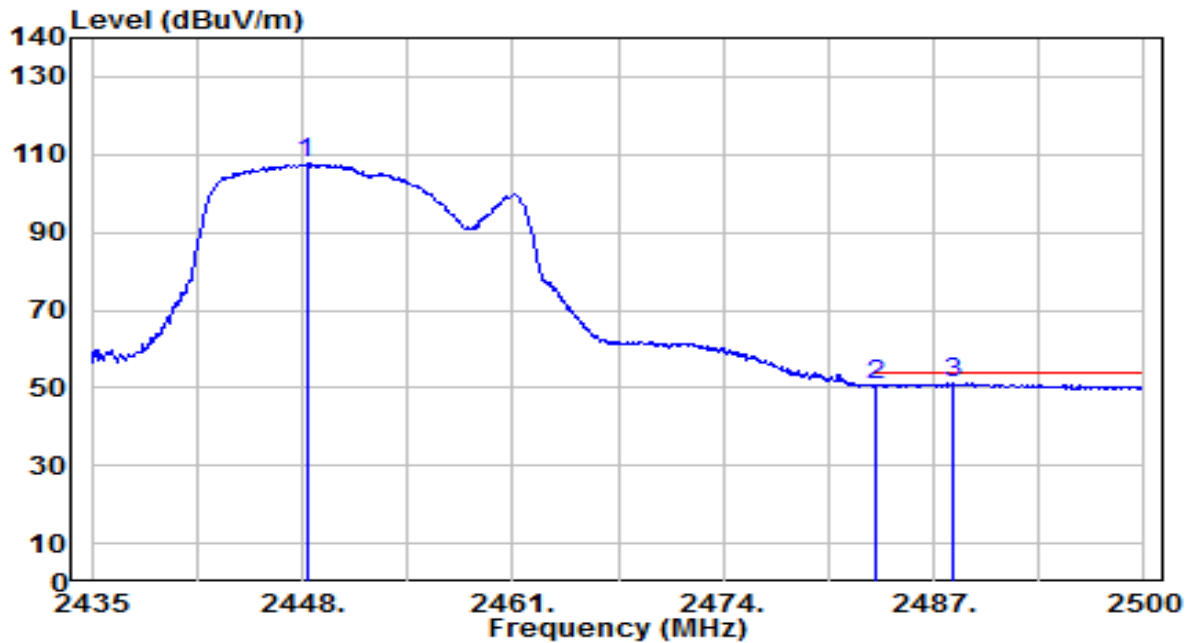


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.260	74.76	32.96	107.72	N/A	N/A	125	225	Average
2	2483.500	17.37	33.09	50.47	-3.53	54.00	125	225	Average
3	* 2488.235	18.03	33.11	51.14	-2.86	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

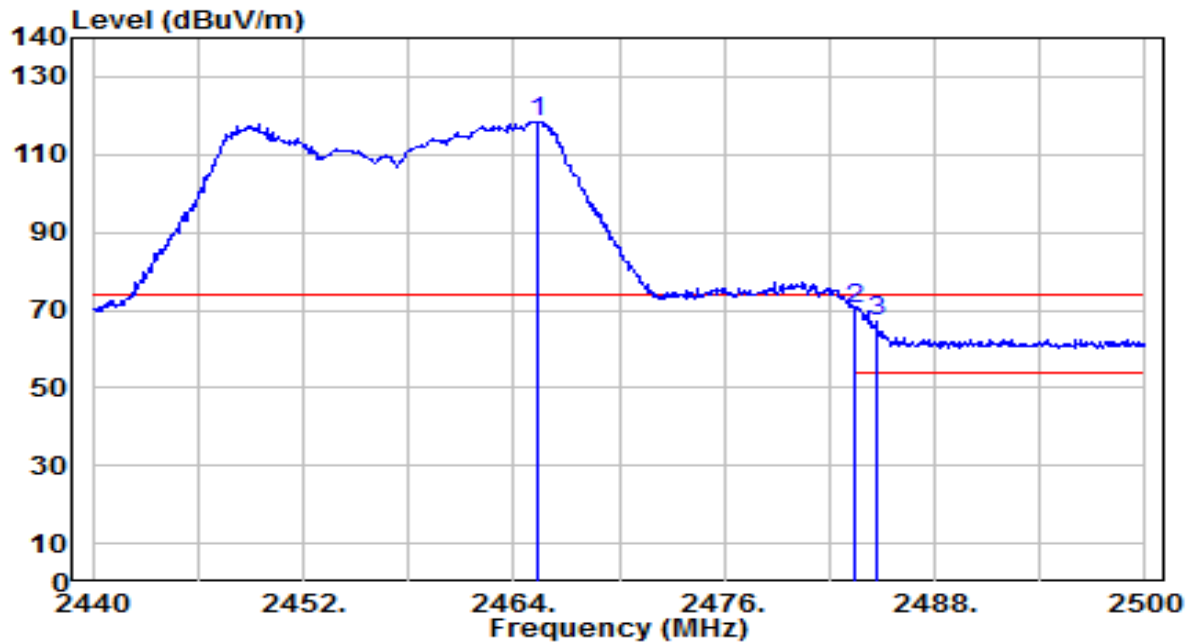


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2465.380	85.52	33.02	118.55	N/A	N/A	160	140	Peak
2	*	2483.500	37.42	33.09	70.51	-3.49	74.00	160	140	Peak
3		2484.700	34.08	33.10	67.18	-6.82	74.00	160	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

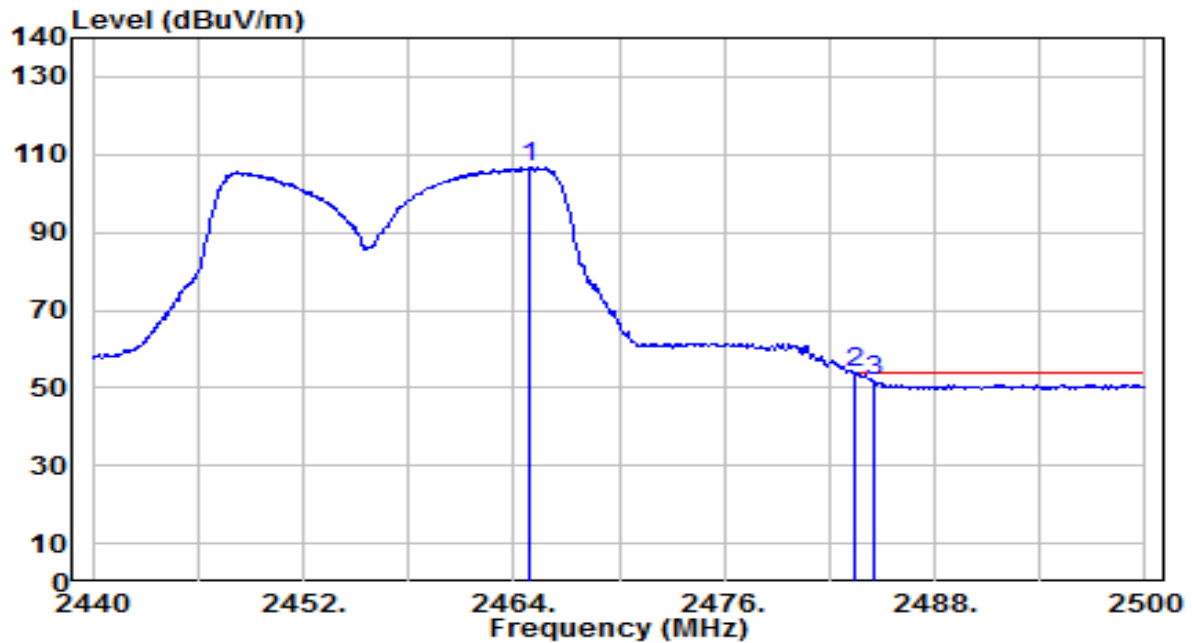


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.840	73.73	33.02	106.75	N/A	N/A	160	140	Average
2	*	2483.500	20.62	33.09	53.71	-0.29	54.00	160	140	Average
3		2484.580	18.90	33.10	52.00	-2.00	54.00	160	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

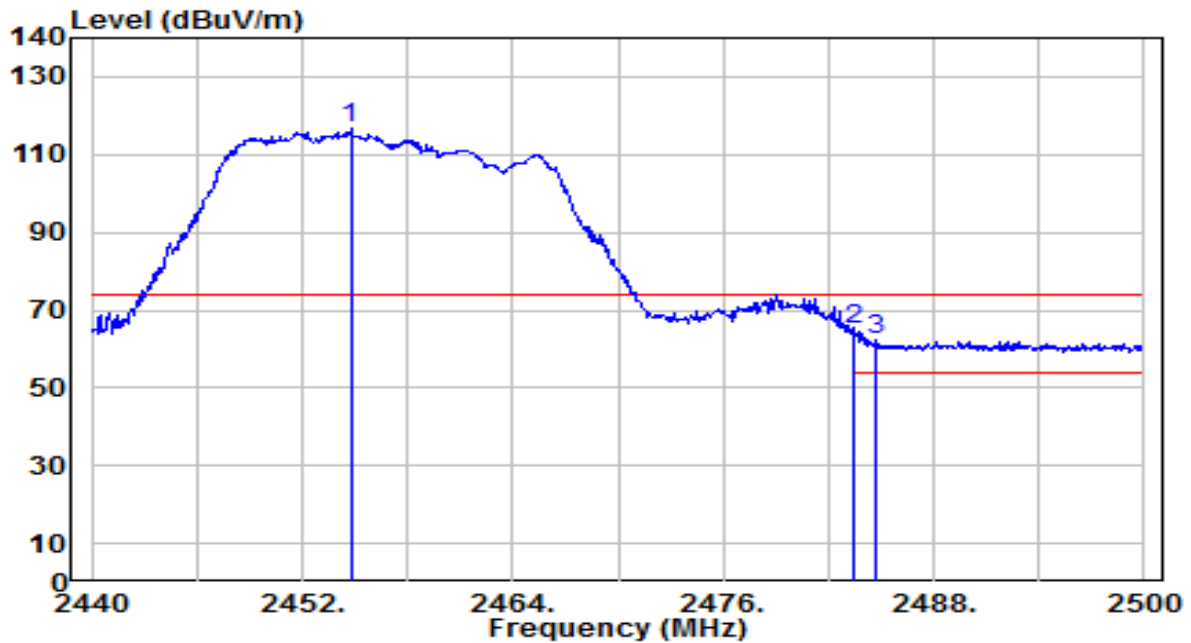


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.760	83.59	32.98	116.57	N/A	N/A	125	225	Peak
2	*	2483.500	32.15	33.09	65.24	-8.76	74.00	125	225	Peak
3		2484.700	29.03	33.10	62.13	-11.87	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

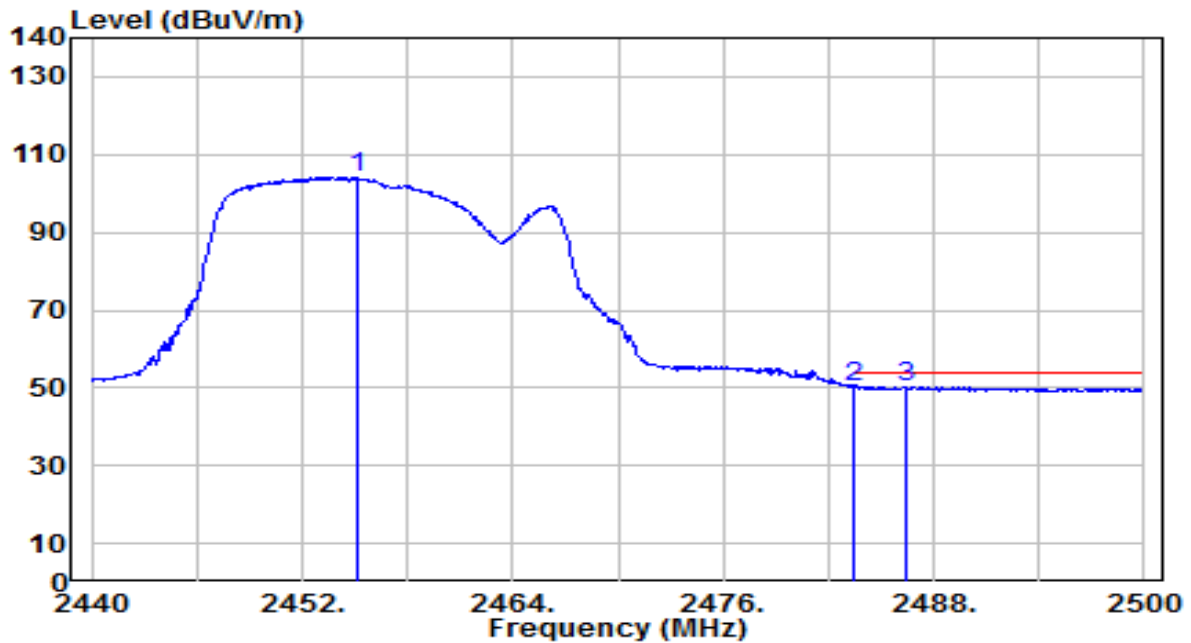


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.120	71.24	32.98	104.22	N/A	N/A	125	225	Average
2	2483.500	17.24	33.09	50.34	-3.66	54.00	125	225	Average
3	* 2486.380	17.28	33.11	50.39	-3.61	54.00	125	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

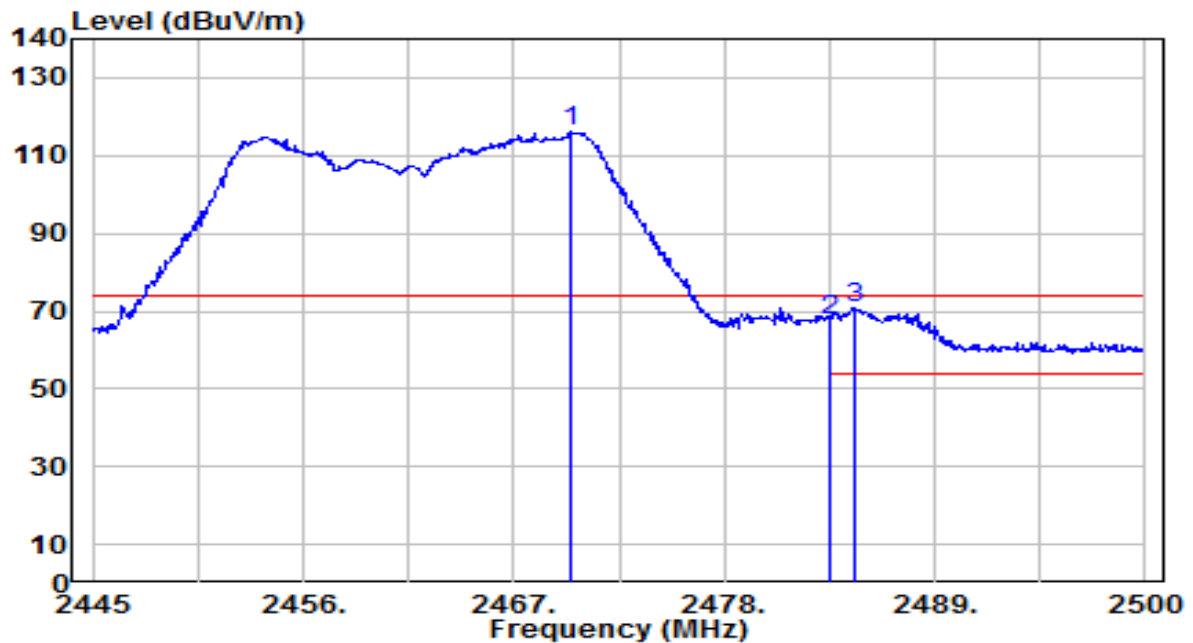


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.915	83.08	33.04	116.13	N/A	N/A	160	140	Peak
2	2483.500	34.69	33.09	67.78	-6.22	74.00	160	140	Peak
3	* 2484.820	37.49	33.10	70.59	-3.41	74.00	160	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

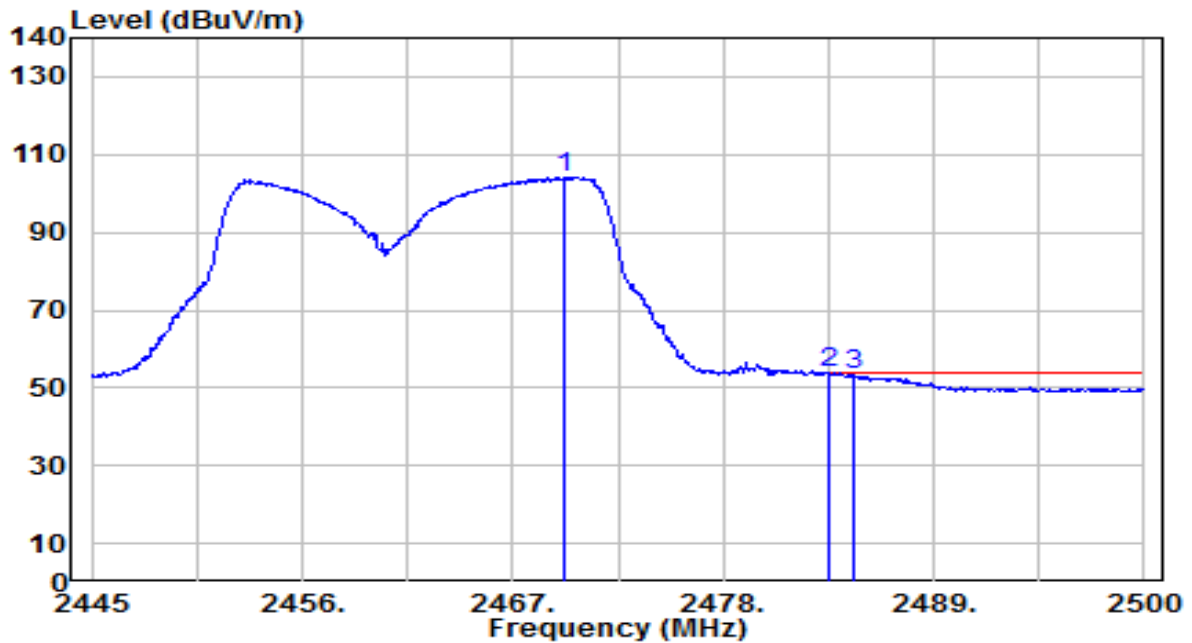


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2469.750	71.27	33.04	104.31	N/A	N/A	160	140	Average
2	*	2483.500	20.66	33.09	53.75	-0.25	54.00	160	140	Average
3		2484.820	20.44	33.10	53.54	-0.46	54.00	160	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

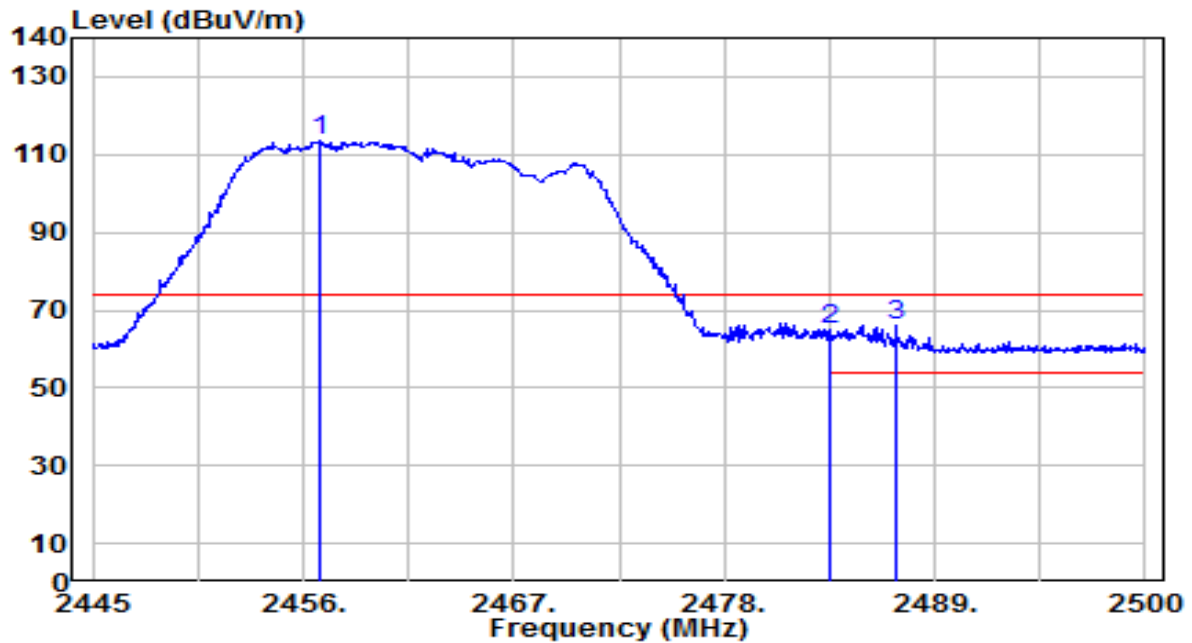


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.825	80.57	32.99	113.56	N/A	N/A	125	225	Peak
2	2483.500	32.00	33.09	65.09	-8.91	74.00	125	225	Peak
3	* 2486.965	33.09	33.11	66.20	-7.80	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

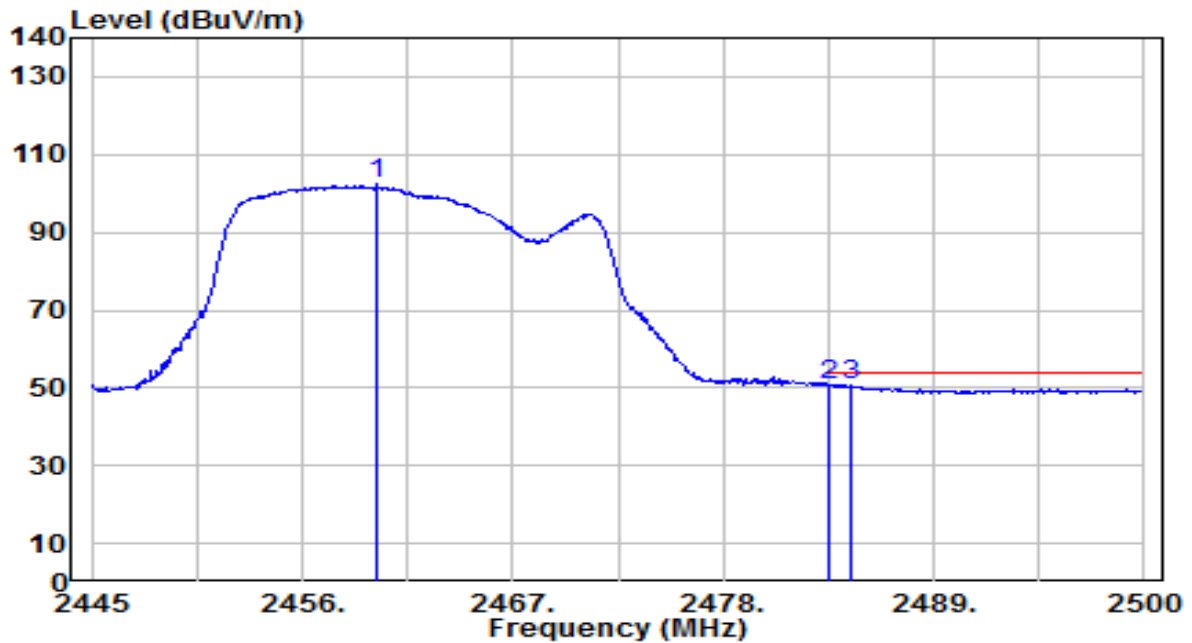


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.960	69.30	33.00	102.30	N/A	N/A	125	225	Average
2	*	2483.500	17.66	33.09	50.75	-3.25	54.00	125	225	Average
3		2484.710	17.43	33.10	50.53	-3.47	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

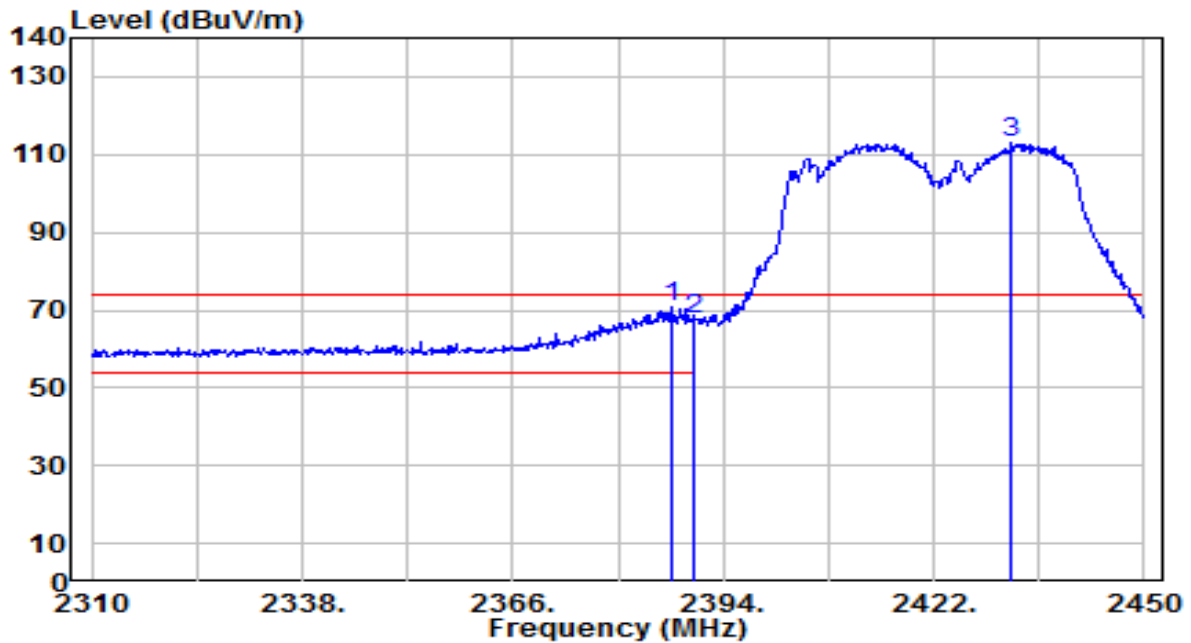


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	38.28	32.72	70.99	-3.01	74.00	100	135	Peak
2		2390.000	34.79	32.73	67.52	-6.48	74.00	100	135	Peak
3		2432.360	79.95	32.89	112.85	N/A	N/A	100	135	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

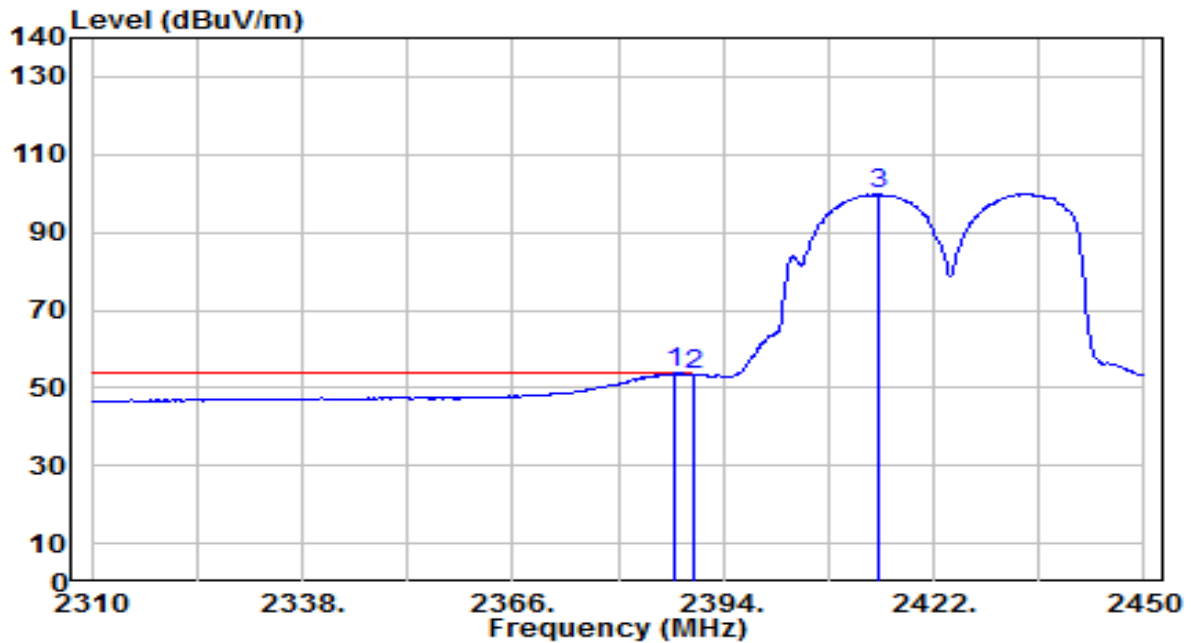


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.420	21.08	32.72	53.80	-0.20	54.00	100	135	Average
2		2390.000	20.68	32.73	53.41	-0.59	54.00	100	135	Average
3		2414.580	66.97	32.82	99.80	N/A	N/A	100	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

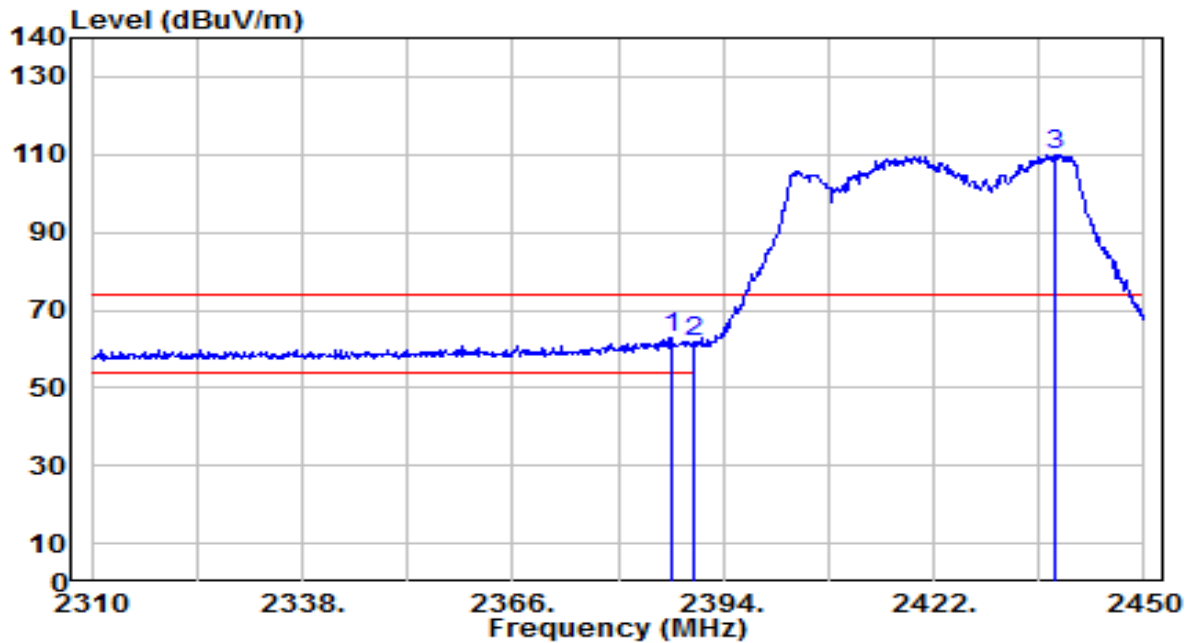


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	30.20	32.72	62.91	-11.09	74.00	125	230	Peak
2		2390.000	29.19	32.73	61.91	-12.09	74.00	125	230	Peak
3		2438.240	77.14	32.92	110.06	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

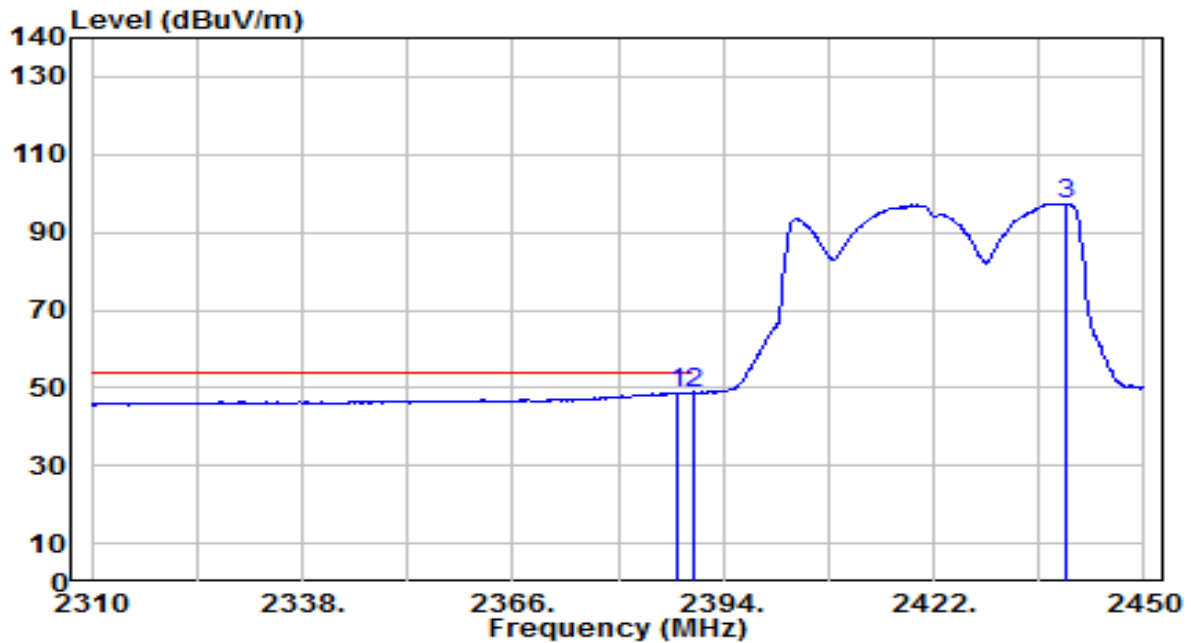


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.980	16.02	32.72	48.74	-5.26	54.00	125	230	Average
2	*	2390.000	16.12	32.73	48.85	-5.15	54.00	125	230	Average
3		2439.500	64.55	32.92	97.47	N/A	N/A	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

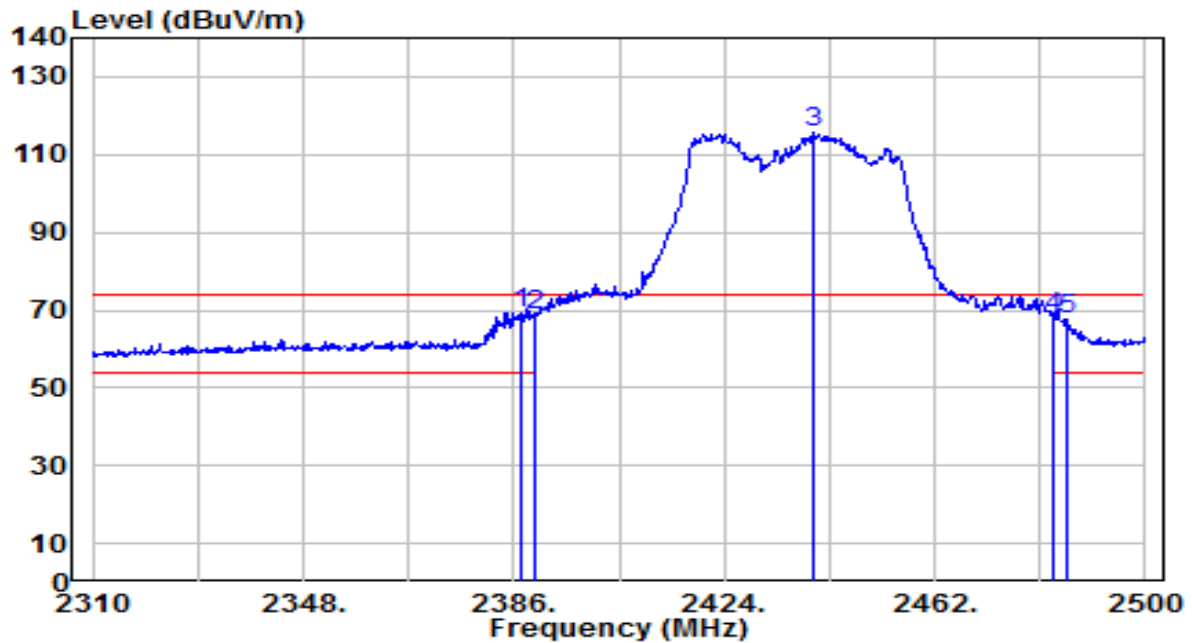


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.520	36.75	32.72	69.47	-4.53	74.00	225	135	Peak
2		2390.000	36.16	32.73	68.89	-5.11	74.00	225	135	Peak
3		2440.150	82.74	32.92	115.67	N/A	N/A	225	135	Peak
4		2483.500	35.32	33.09	68.41	-5.59	74.00	225	135	Peak
5		2485.940	34.63	33.10	67.73	-6.27	74.00	225	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

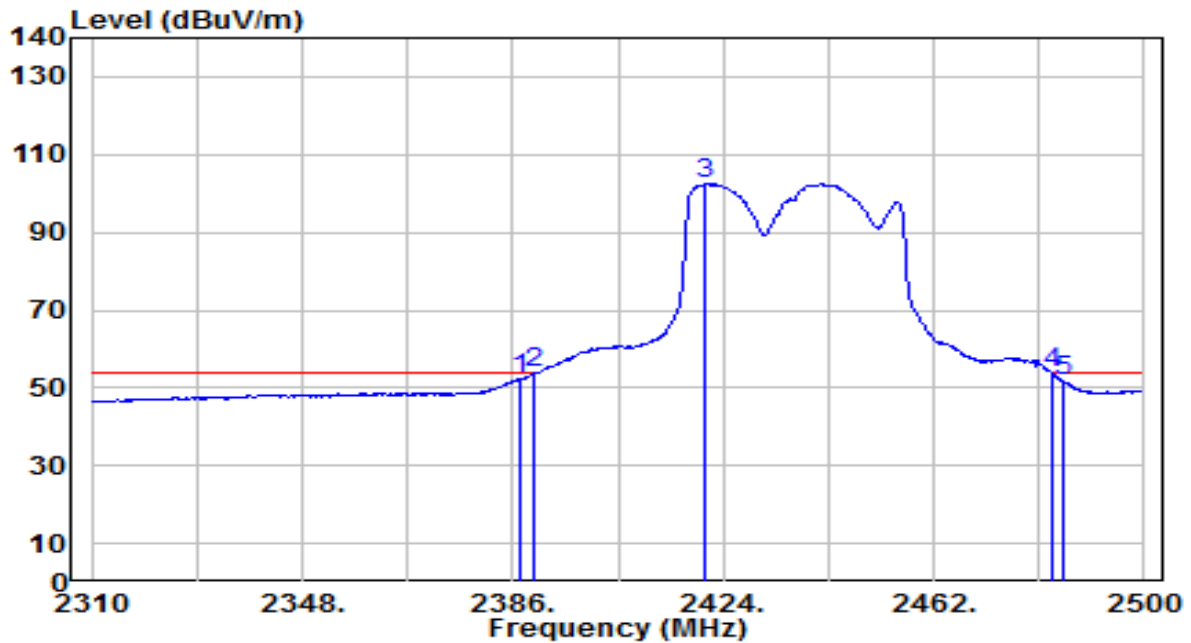


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.330	19.74	32.72	52.46	-1.54	54.00	225	135	Average
2	*	2390.000	21.17	32.73	53.90	-0.10	54.00	225	135	Average
3		2420.770	69.53	32.85	102.38	N/A	N/A	225	135	Average
4		2483.500	20.67	33.09	53.77	-0.23	54.00	225	135	Average
5		2485.180	18.68	33.10	51.78	-2.22	54.00	225	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

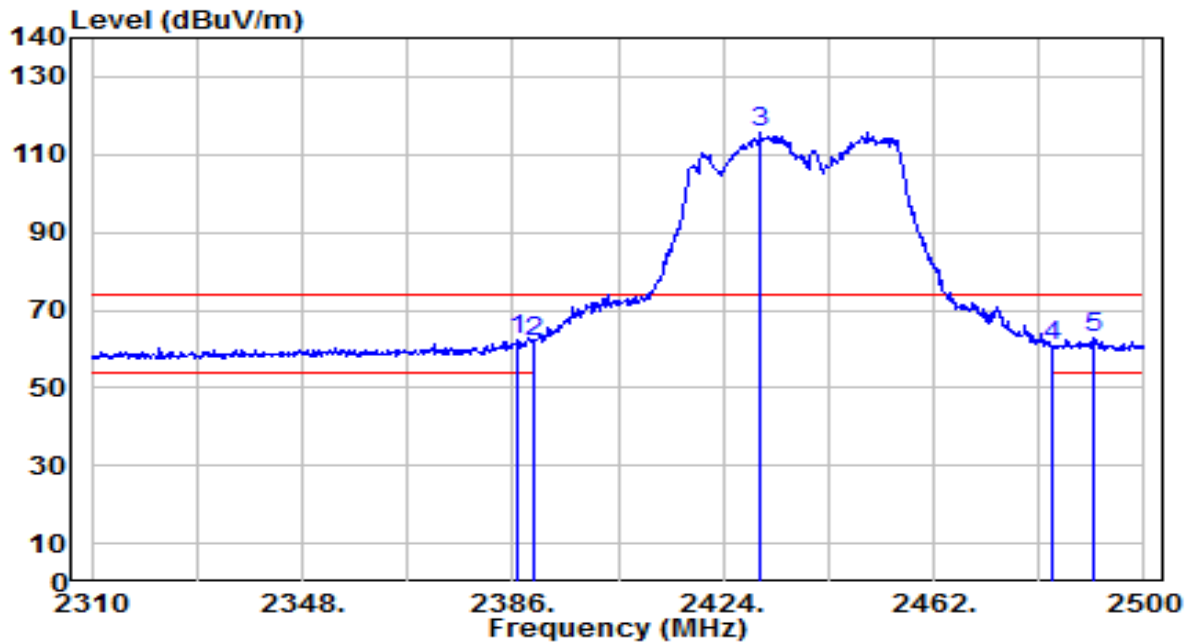


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	29.69	32.71	62.41	-11.59	74.00	265	155	Peak
2	2390.000	29.14	32.73	61.87	-12.13	74.00	265	155	Peak
3	2430.840	82.79	32.89	115.68	N/A	N/A	265	155	Peak
4	2483.500	27.81	33.09	60.90	-13.10	74.00	265	155	Peak
5	* 2490.690	29.49	33.12	62.62	-11.38	74.00	265	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

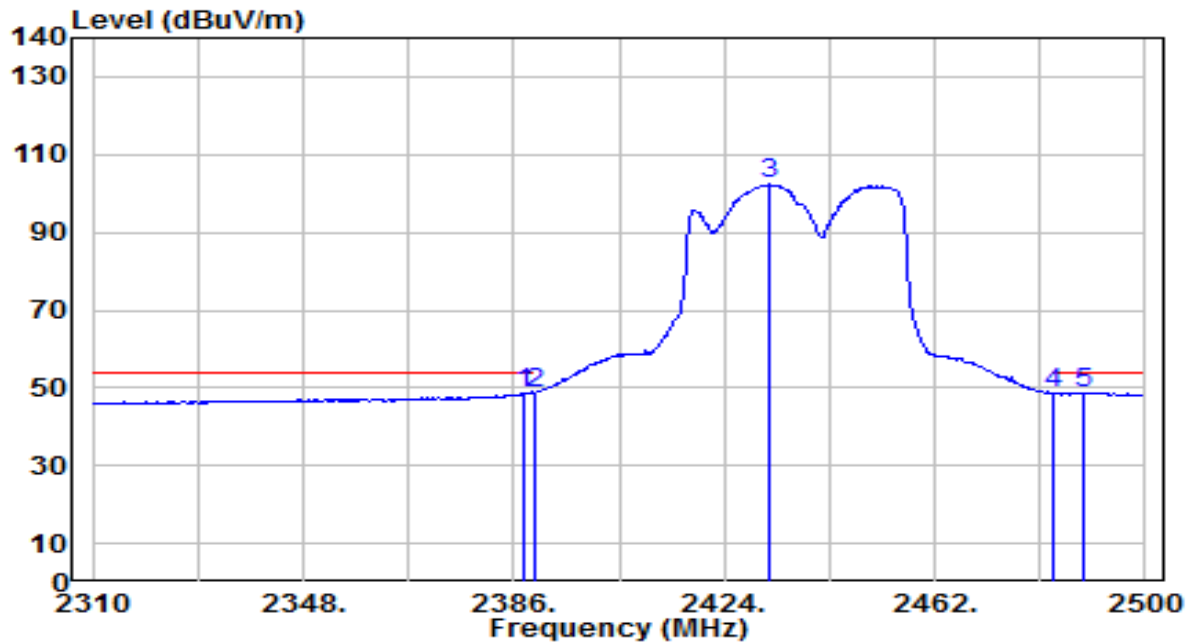


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	15.69	32.72	48.41	-5.59	54.00	265	155	Average
2	2390.000	16.00	32.73	48.73	-5.27	54.00	265	155	Average
3	2432.360	69.37	32.89	102.27	N/A	N/A	265	155	Average
4	2483.500	15.51	33.09	48.60	-5.40	54.00	265	155	Average
5	* 2488.980	15.71	33.12	48.83	-5.17	54.00	265	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

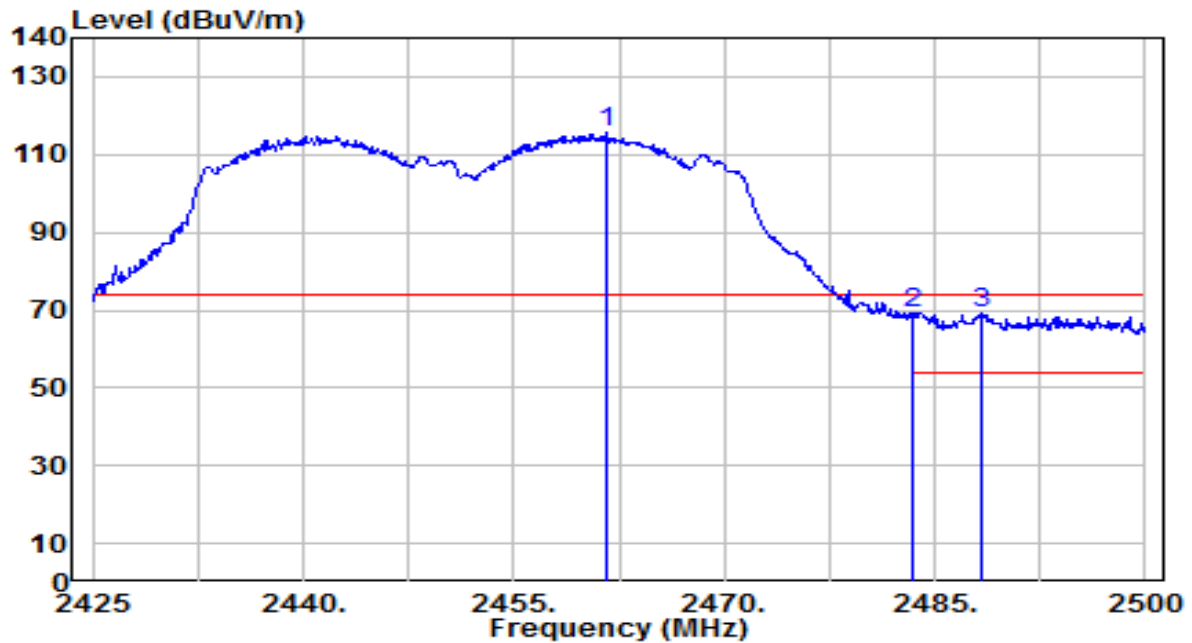


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.675	82.75	33.01	115.76	N/A	N/A	160	140	Peak
2	*	2483.500	36.08	33.09	69.18	-4.82	74.00	160	140	Peak
3		2488.300	36.06	33.11	69.17	-4.83	74.00	160	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

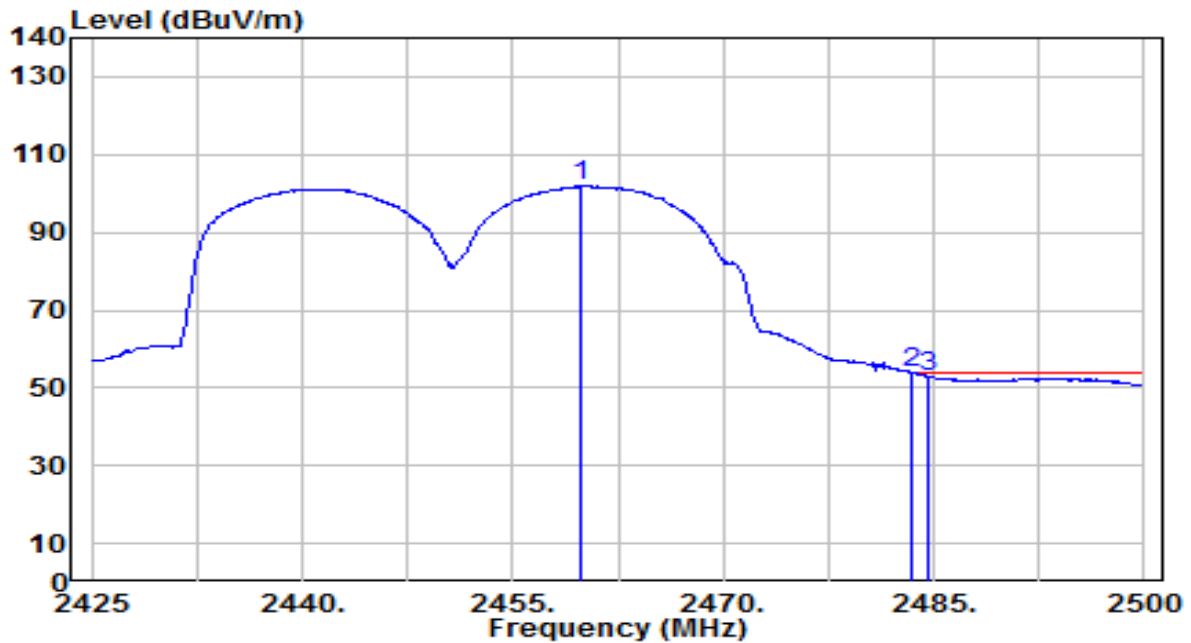


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.875	68.91	33.00	101.92	N/A	N/A	160	140	Average
2	*	2483.500	20.68	33.09	53.78	-0.22	54.00	160	140	Average
3		2484.550	19.80	33.10	52.90	-1.10	54.00	160	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

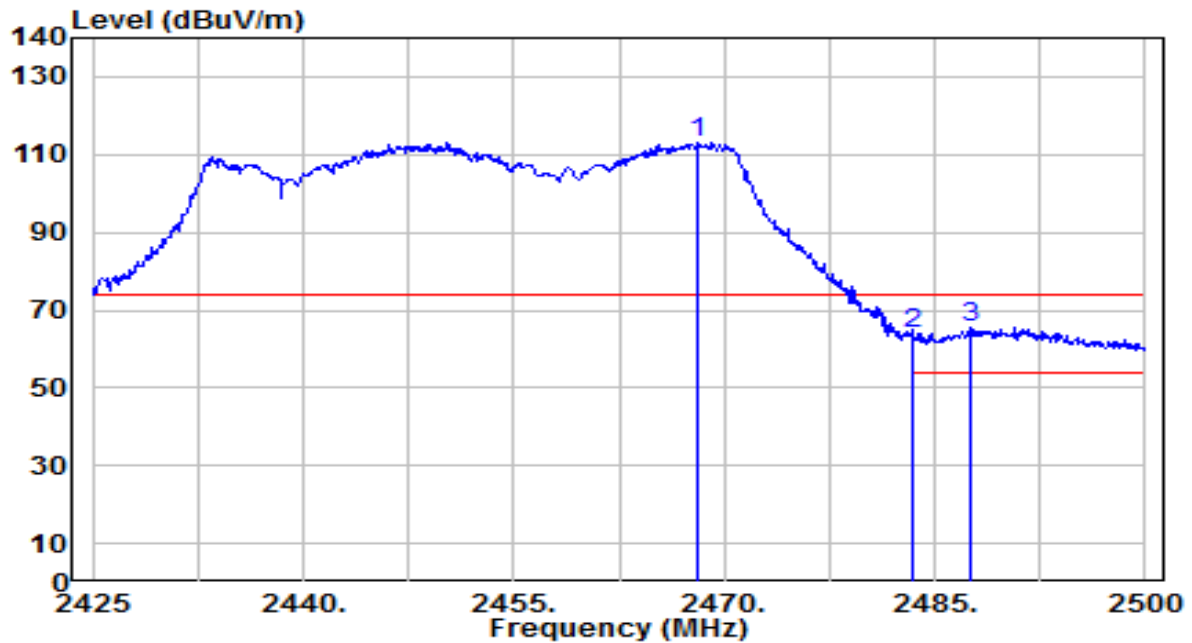


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.050	80.20	33.03	113.23	N/A	N/A	125	225	Peak
2	2483.500	30.65	33.09	63.74	-10.26	74.00	125	225	Peak
3	* 2487.475	32.43	33.11	65.54	-8.46	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

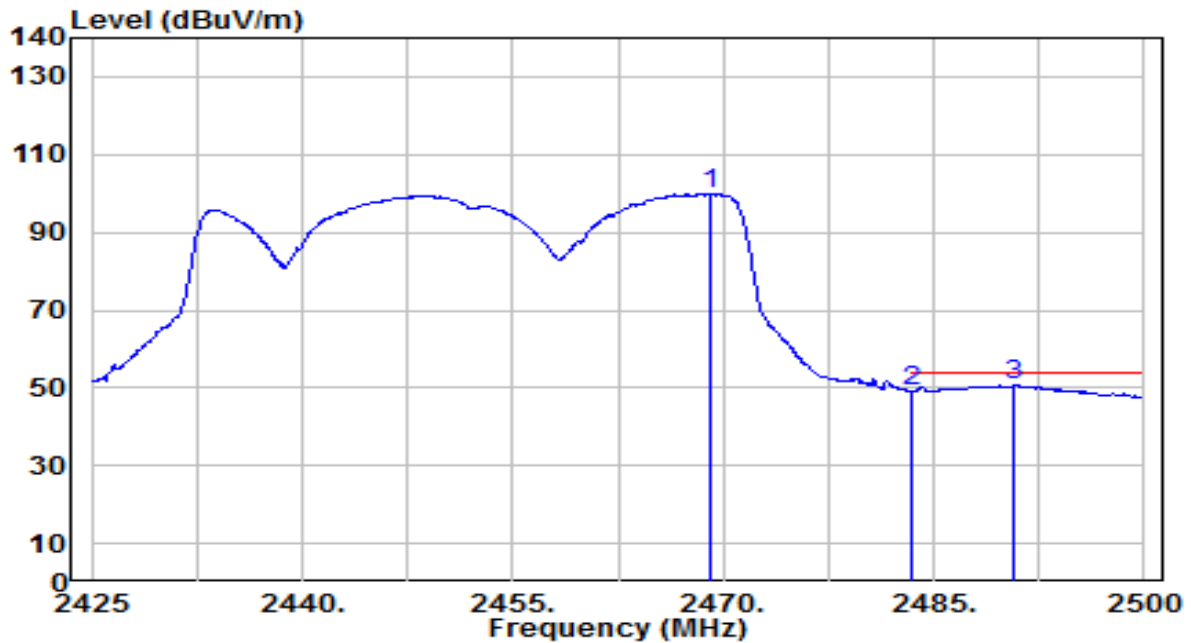


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.025	66.74	33.04	99.77	N/A	N/A	125	225	Average
2	2483.500	16.16	33.09	49.25	-4.75	54.00	125	225	Average
3	* 2490.700	17.45	33.12	50.57	-3.43	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

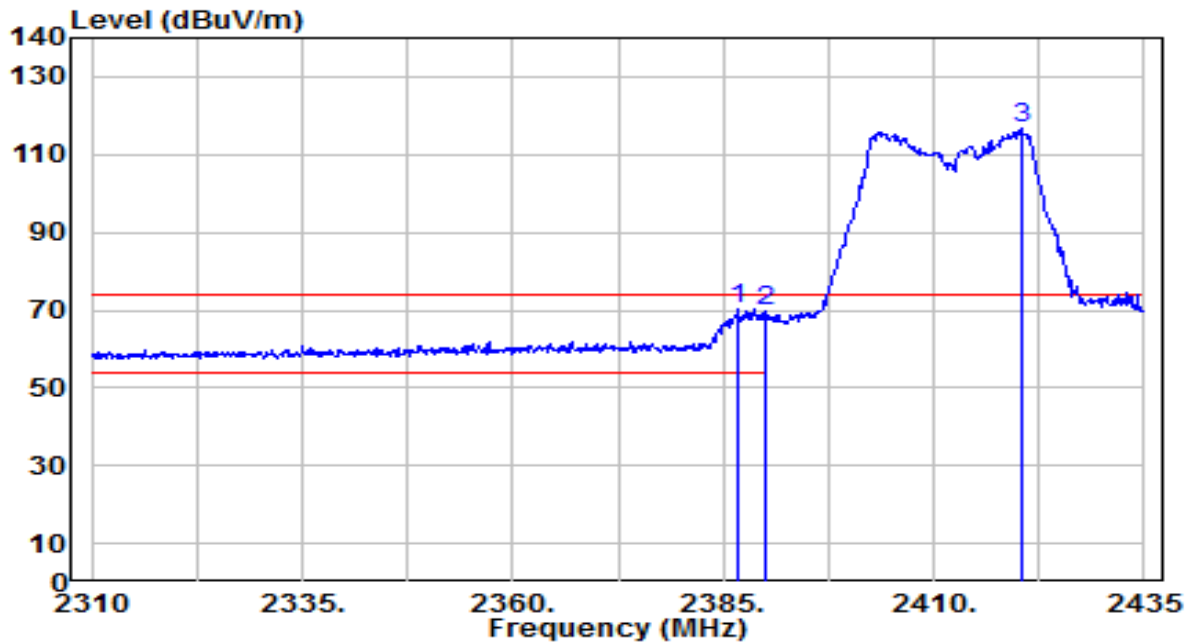


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.875	37.45	32.71	70.16	-3.84	74.00	140	140	Peak
2		2390.000	36.87	32.73	69.60	-4.40	74.00	140	140	Peak
3		2420.375	83.97	32.85	116.82	N/A	N/A	140	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

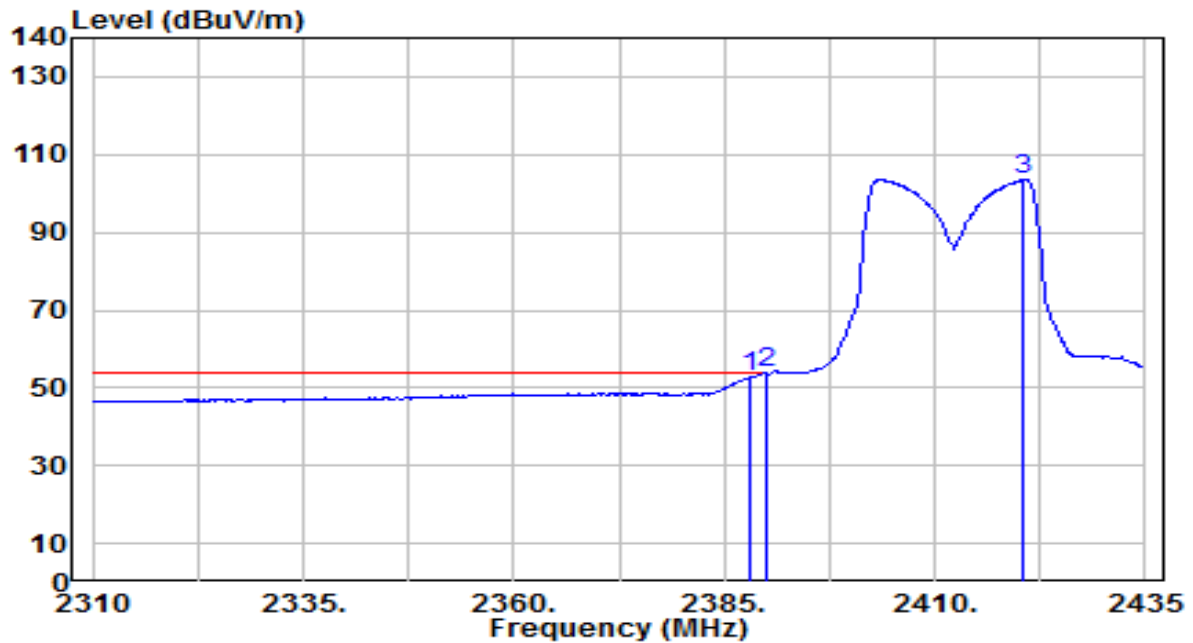


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	19.91	32.72	52.63	-1.37	54.00	140	140	Average
2	*	2390.000	21.00	32.73	53.72	-0.28	54.00	140	140	Average
3		2420.625	70.69	32.85	103.53	N/A	N/A	140	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

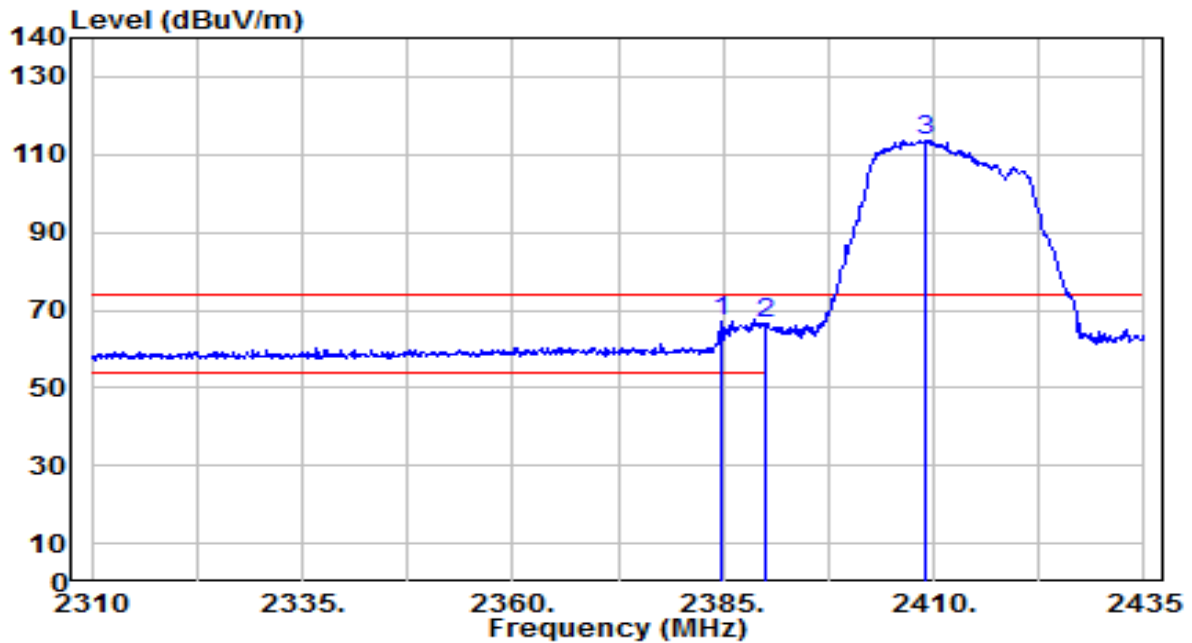


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.875	34.26	32.71	66.97	-7.03	74.00	125	230	Peak
2		2390.000	33.60	32.73	66.32	-7.68	74.00	125	230	Peak
3		2409.000	80.90	32.80	113.70	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

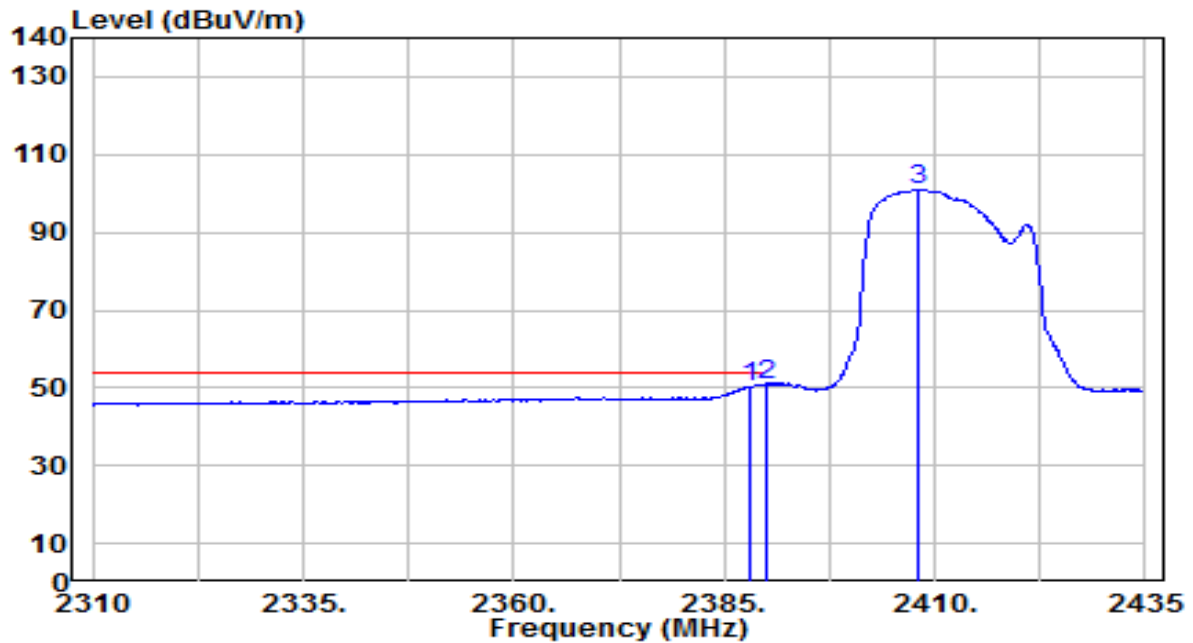


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	17.61	32.72	50.33	-3.67	54.00	125	230	Average
2	*	2390.000	18.13	32.73	50.85	-3.15	54.00	125	230	Average
3		2408.125	68.09	32.80	100.89	N/A	N/A	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

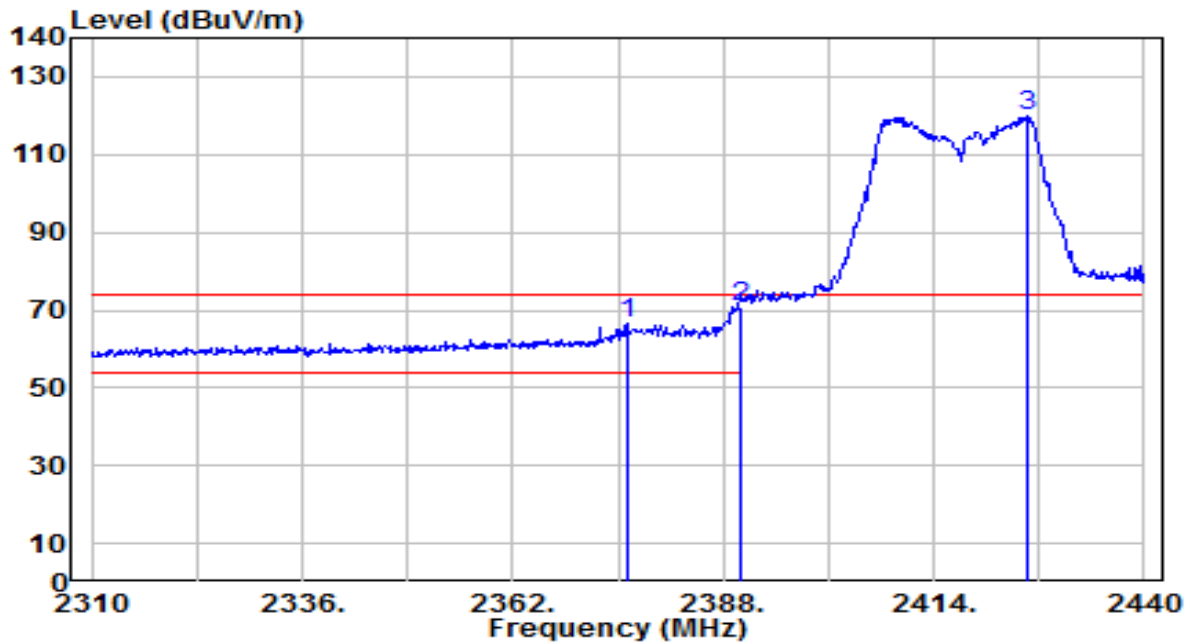


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2376.040	33.65	32.67	66.32	-7.68	74.00	140	140	Peak
2	* 2390.000	38.26	32.73	70.98	-3.02	74.00	140	140	Peak
3	2425.440	86.89	32.87	119.76	N/A	N/A	140	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

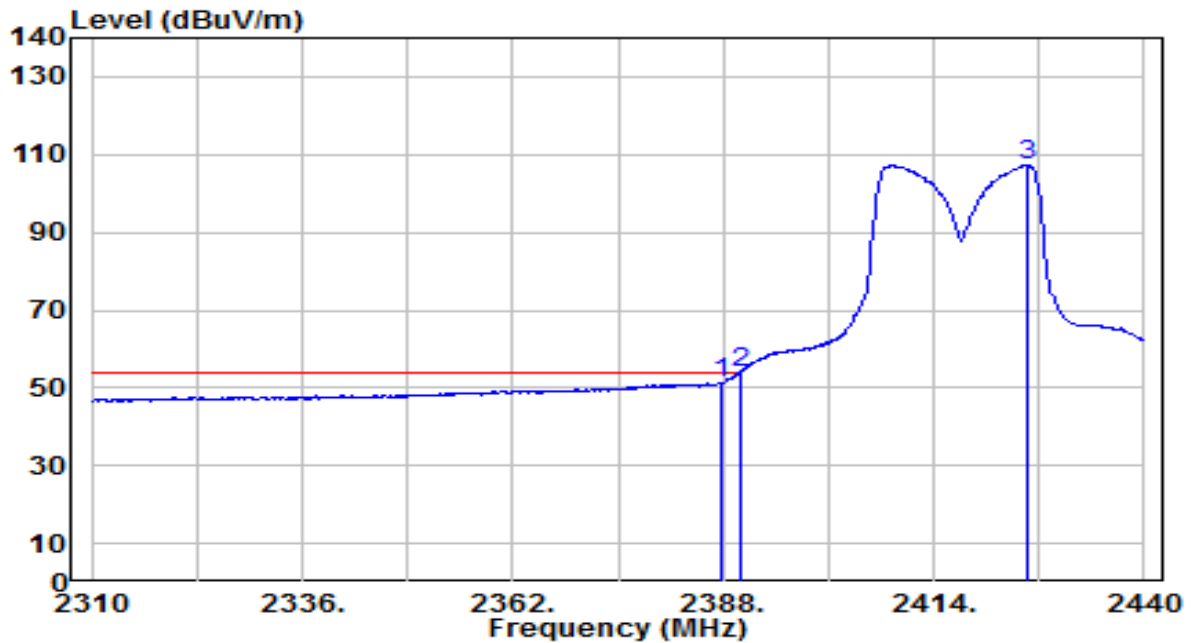


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.740	18.66	32.72	51.38	-2.62	54.00	140	140	Average
2	*	2390.000	21.00	32.73	53.72	-0.28	54.00	140	140	Average
3		2425.440	74.39	32.87	107.26	N/A	N/A	140	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

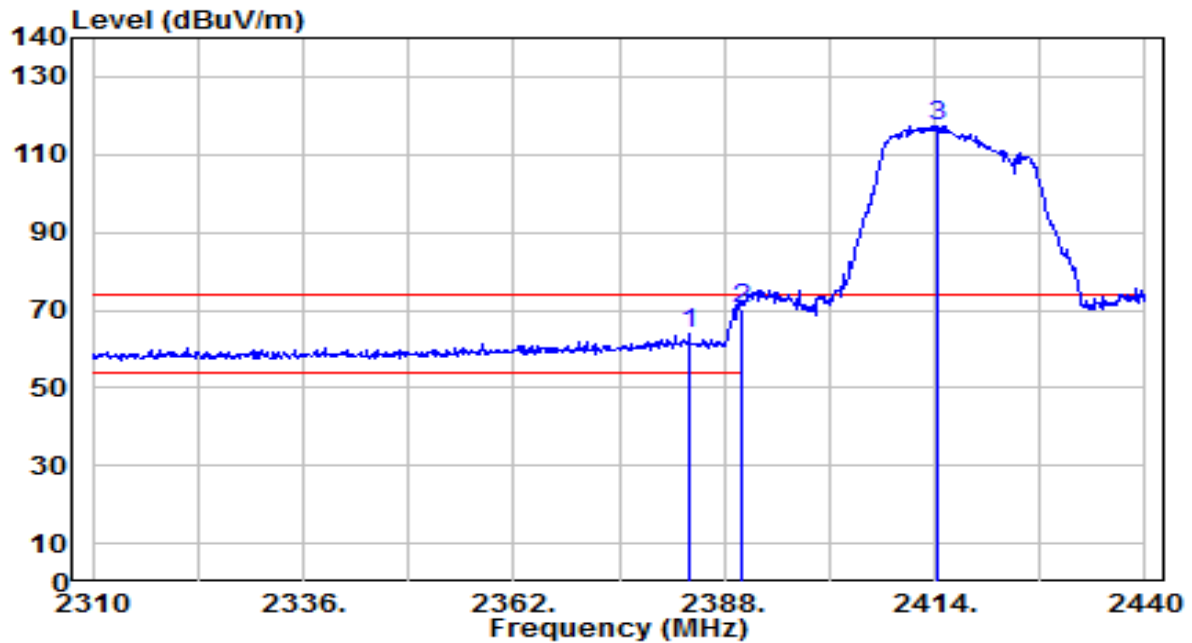


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2383.710	31.24	32.70	63.95	-10.05	74.00	125	230	Peak
2	*	2390.000	37.69	32.73	70.42	-3.58	74.00	125	230	Peak
3		2414.390	84.52	32.82	117.34	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

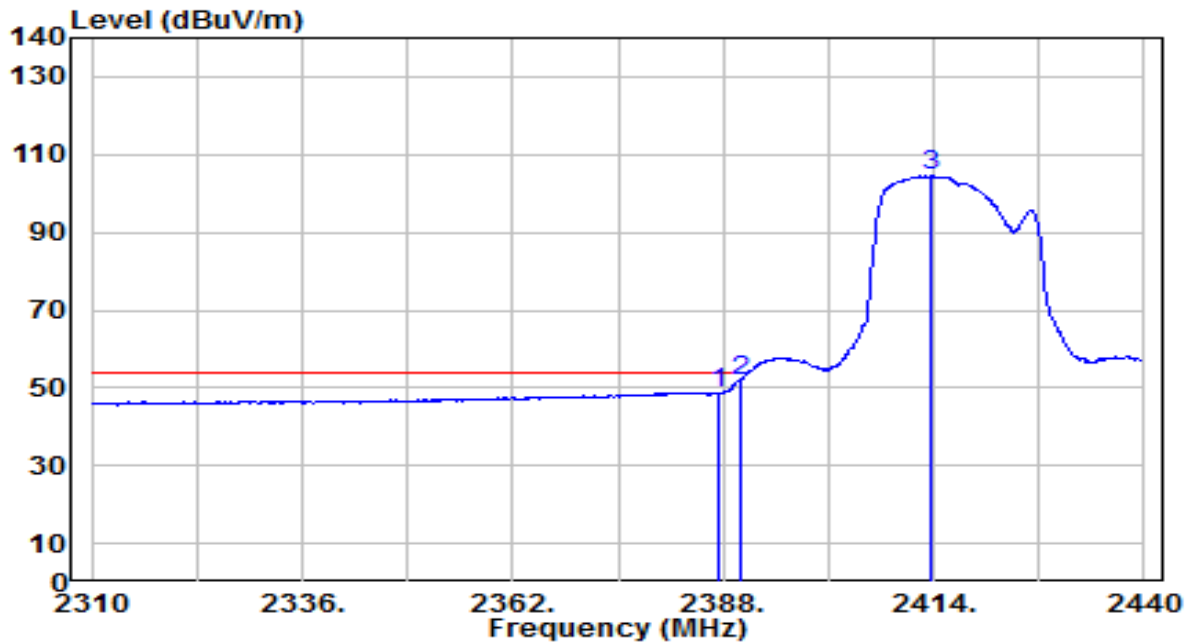


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.480	16.08	32.72	48.80	-5.20	54.00	125	230	Average
2	*	2390.000	19.01	32.73	51.74	-2.26	54.00	125	230	Average
3		2413.740	71.59	32.82	104.41	N/A	N/A	125	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

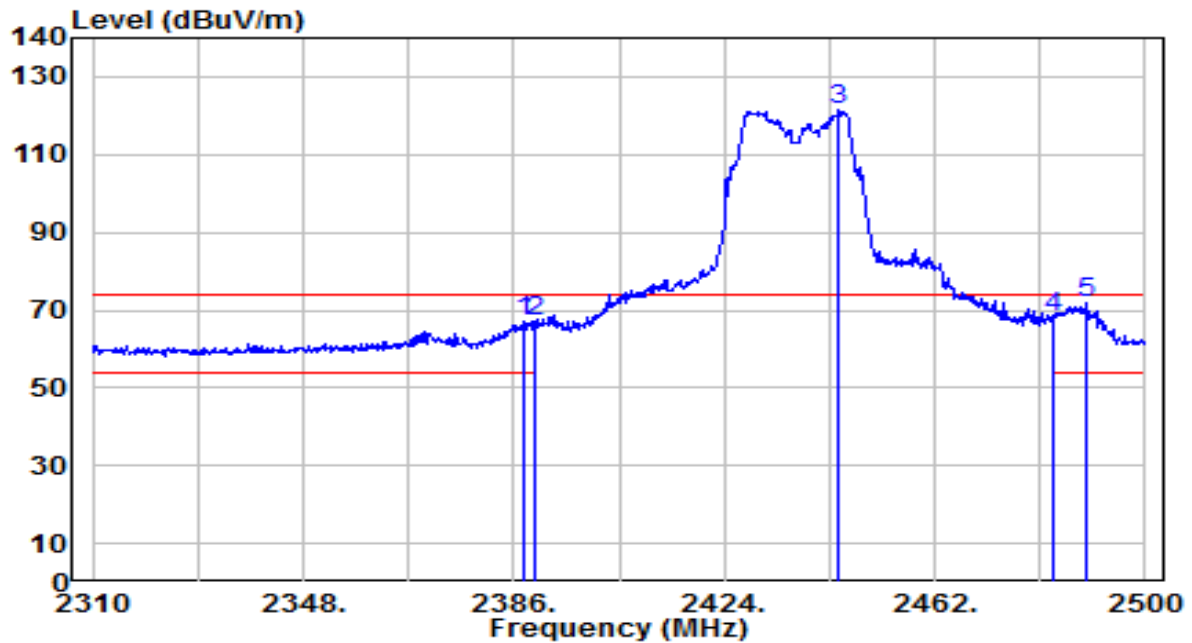


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	34.18	32.72	66.90	-7.10	74.00	120	135	Peak
2	2390.000	34.11	32.73	66.84	-7.16	74.00	120	135	Peak
3	2444.520	88.83	32.94	121.77	N/A	N/A	120	135	Peak
4	2483.500	35.24	33.09	68.33	-5.67	74.00	120	135	Peak
5	* 2489.360	38.51	33.12	71.62	-2.38	74.00	120	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

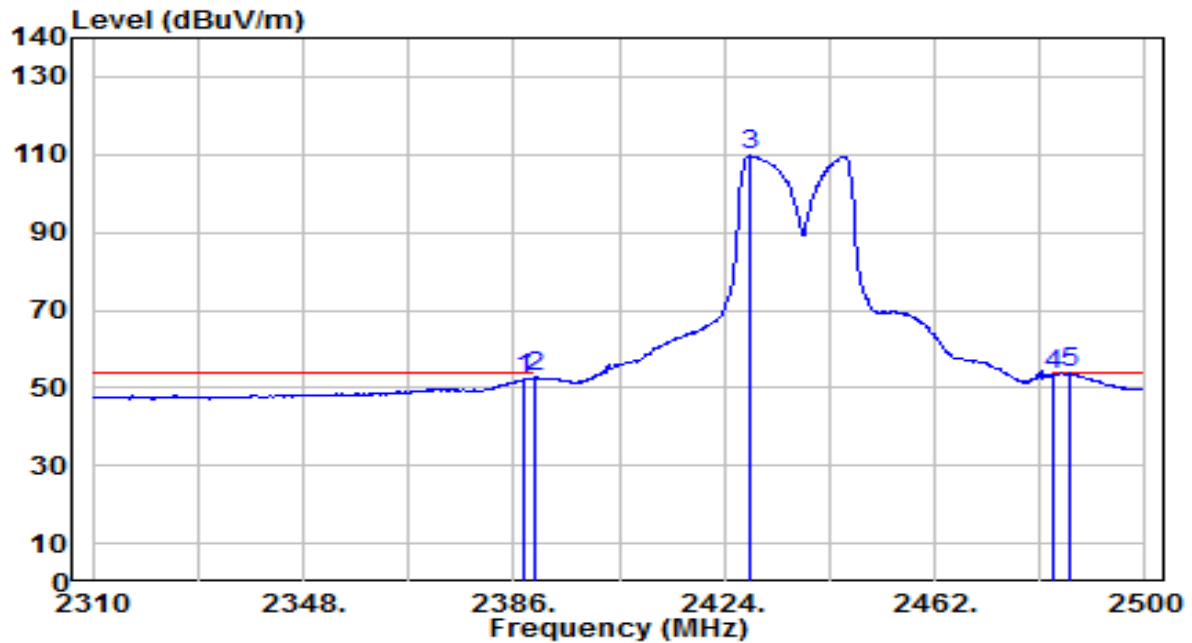


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	19.39	32.72	52.11	-1.89	54.00	120	135	Average
2	2390.000	19.95	32.73	52.68	-1.32	54.00	120	135	Average
3	2428.750	76.75	32.88	109.62	N/A	N/A	120	135	Average
4	2483.500	20.22	33.09	53.31	-0.69	54.00	120	135	Average
5	* 2486.320	20.60	33.11	53.71	-0.29	54.00	120	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

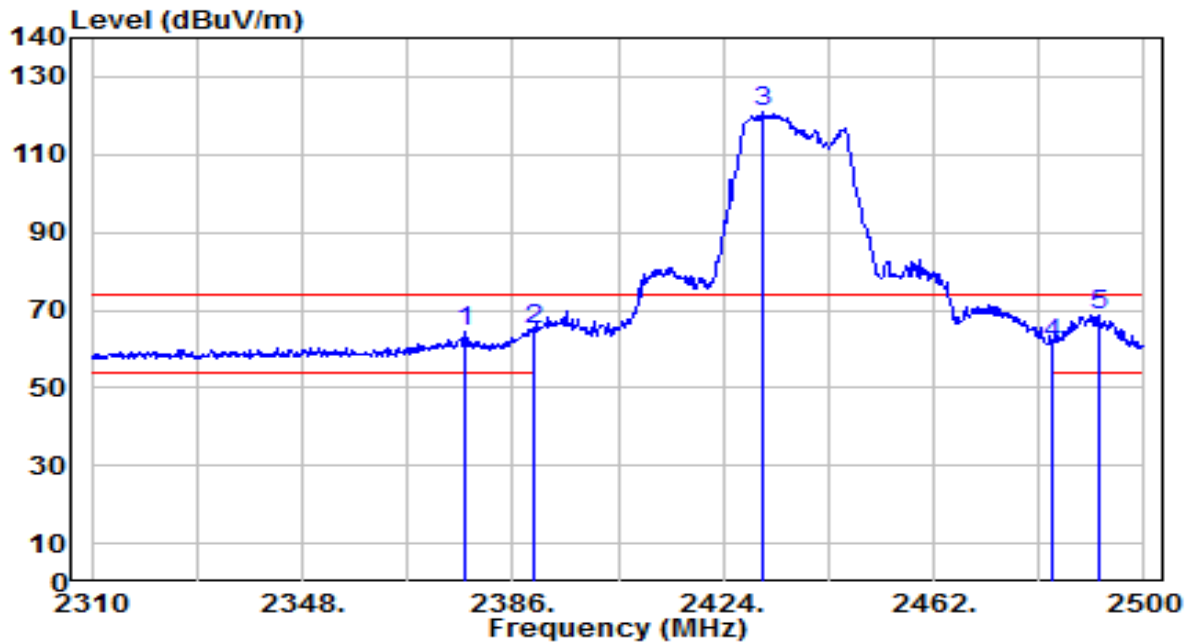


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2377.260	31.67	32.68	64.35	-9.65	74.00	265	155	Peak
2	2390.000	32.07	32.73	64.80	-9.20	74.00	265	155	Peak
3	2431.220	87.99	32.89	120.88	N/A	N/A	265	155	Peak
4	2483.500	28.42	33.09	61.51	-12.49	74.00	265	155	Peak
5	* 2491.640	35.37	33.13	68.49	-5.51	74.00	265	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

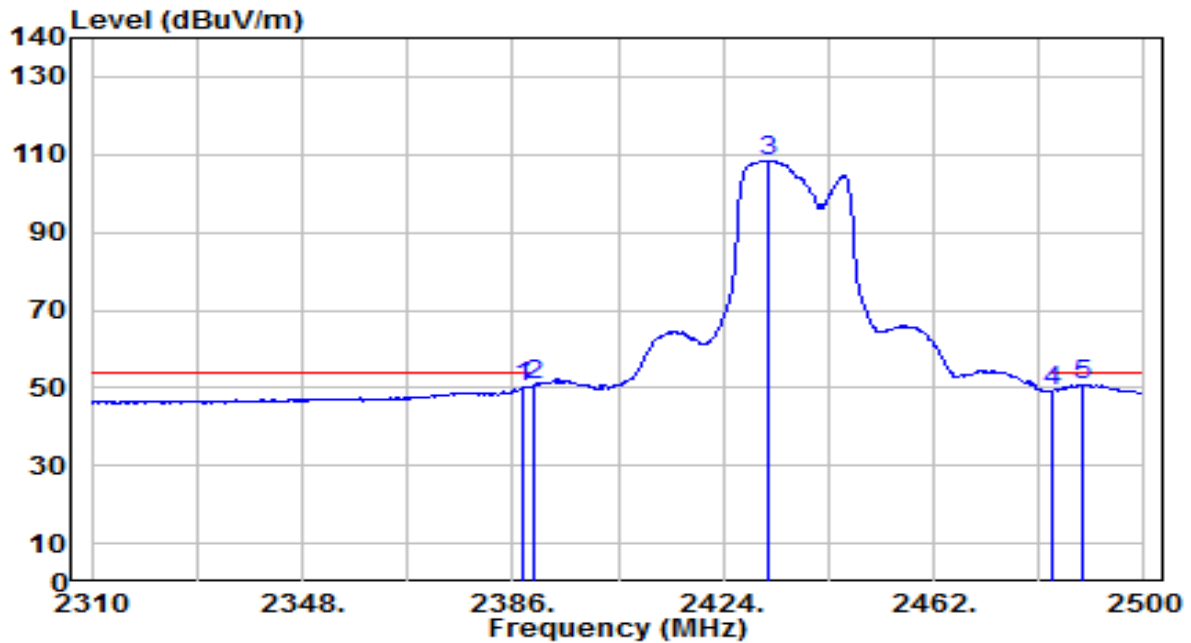


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	17.26	32.72	49.97	-4.03	54.00	265	155	Average
2	2390.000	17.87	32.73	50.60	-3.40	54.00	265	155	Average
3	2431.980	75.53	32.89	108.42	N/A	N/A	265	155	Average
4	2483.500	16.19	33.09	49.29	-4.71	54.00	265	155	Average
5	* 2488.790	17.82	33.12	50.94	-3.06	54.00	265	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

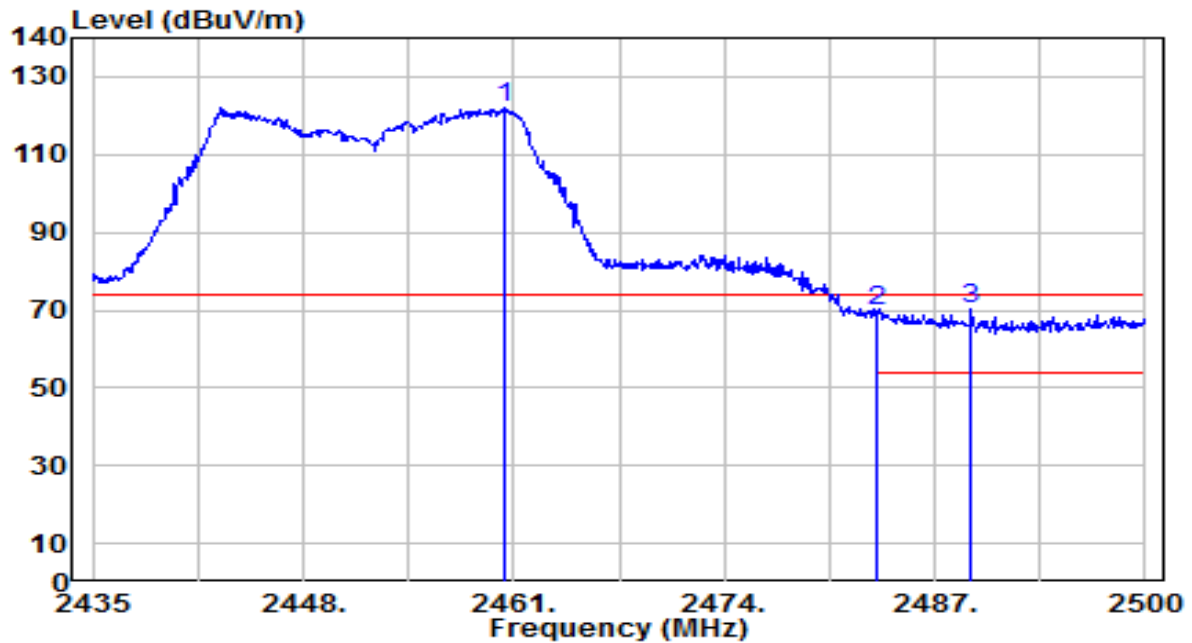


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.415	89.16	33.00	122.16	N/A	N/A	145	140	Peak
2	2483.500	36.74	33.09	69.84	-4.16	74.00	145	140	Peak
3	* 2489.275	37.39	33.12	70.51	-3.49	74.00	145	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

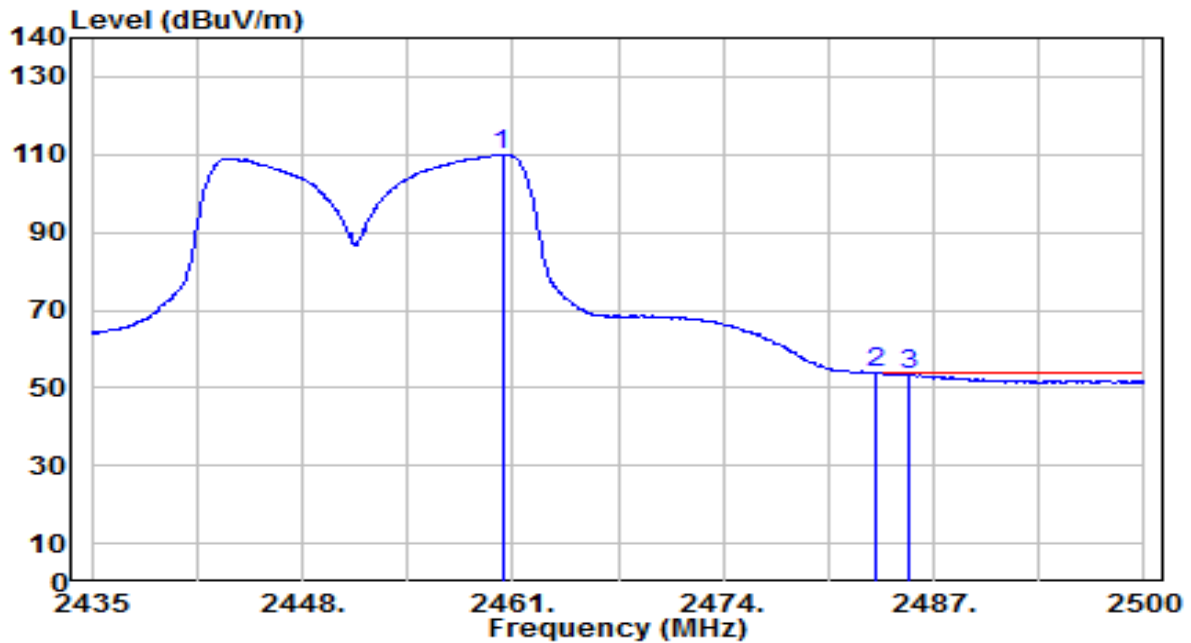


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.350	76.94	33.00	109.95	N/A	N/A	145	140	Average
2	*	2483.500	20.71	33.09	53.81	-0.19	54.00	145	140	Average
3		2485.505	20.46	33.10	53.57	-0.43	54.00	145	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

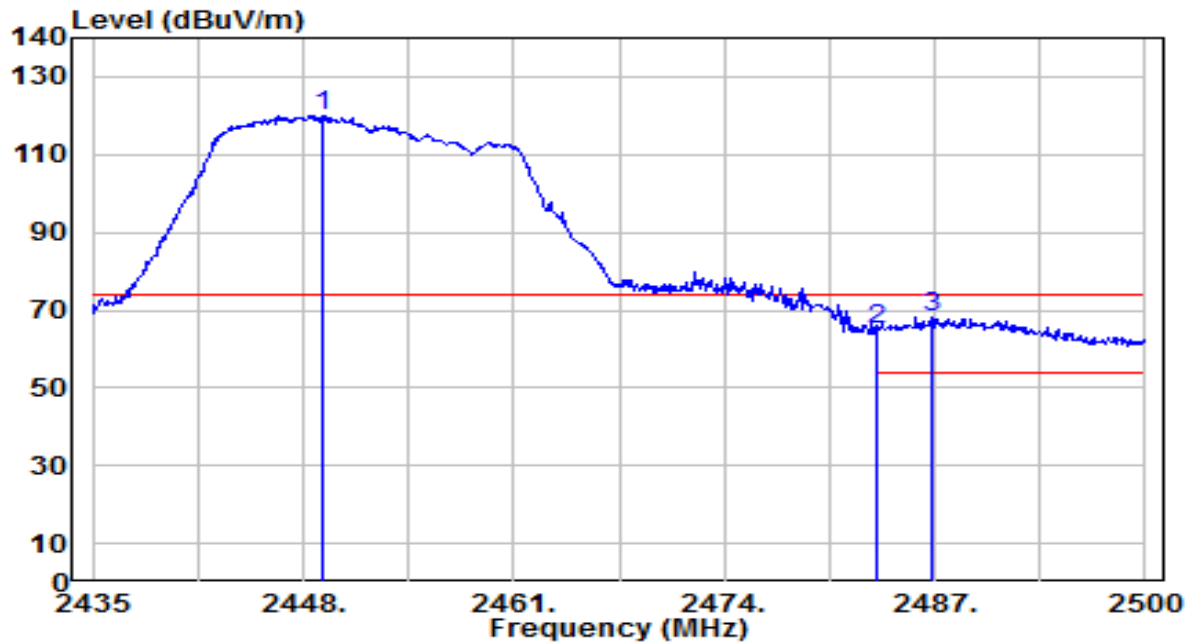


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.235	87.03	32.96	119.99	N/A	N/A	125	225	Peak
2	2483.500	31.90	33.09	65.00	-9.00	74.00	125	225	Peak
3	* 2486.805	35.26	33.11	68.37	-5.63	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

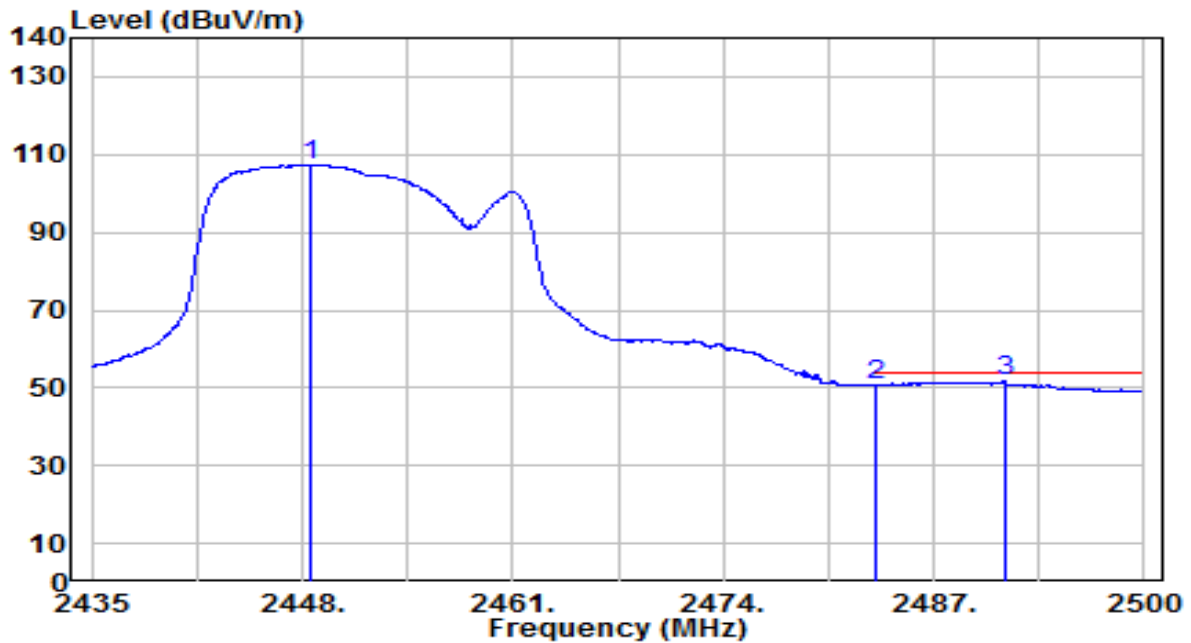


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.585	74.39	32.96	107.35	N/A	N/A	125	225	Average
2	2483.500	17.77	33.09	50.86	-3.14	54.00	125	225	Average
3	* 2491.355	18.54	33.13	51.67	-2.33	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

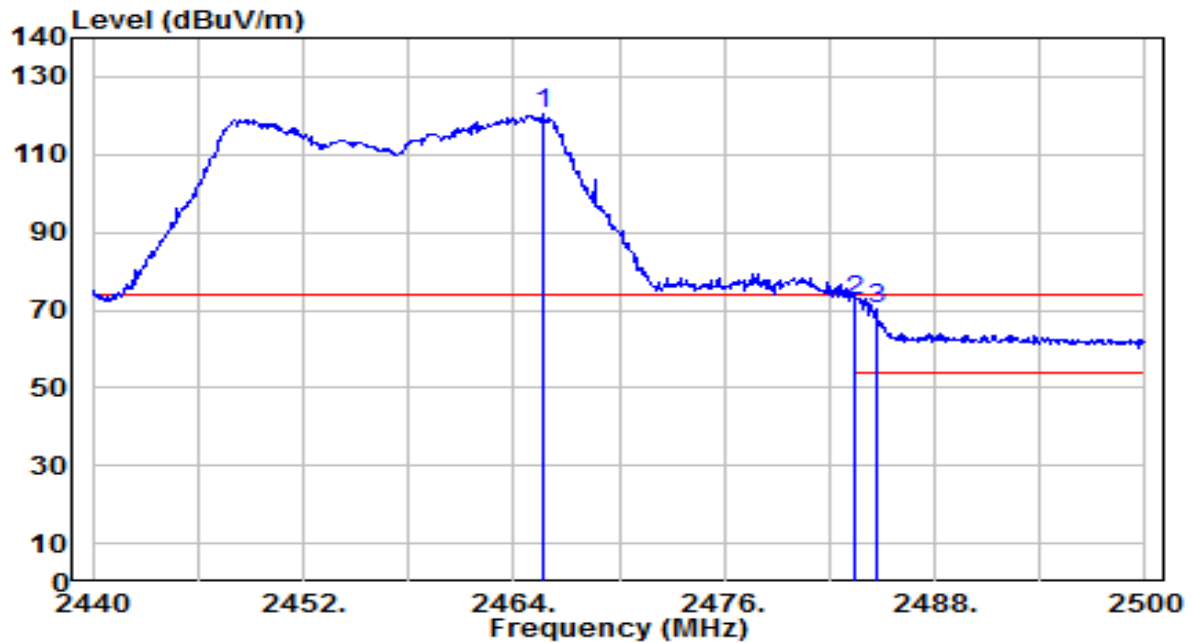


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2465.740	87.60	33.03	120.63	N/A	N/A	145	140	Peak
2	*	2483.500	39.25	33.09	72.35	-1.65	74.00	145	140	Peak
3		2484.640	37.38	33.10	70.48	-3.52	74.00	145	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

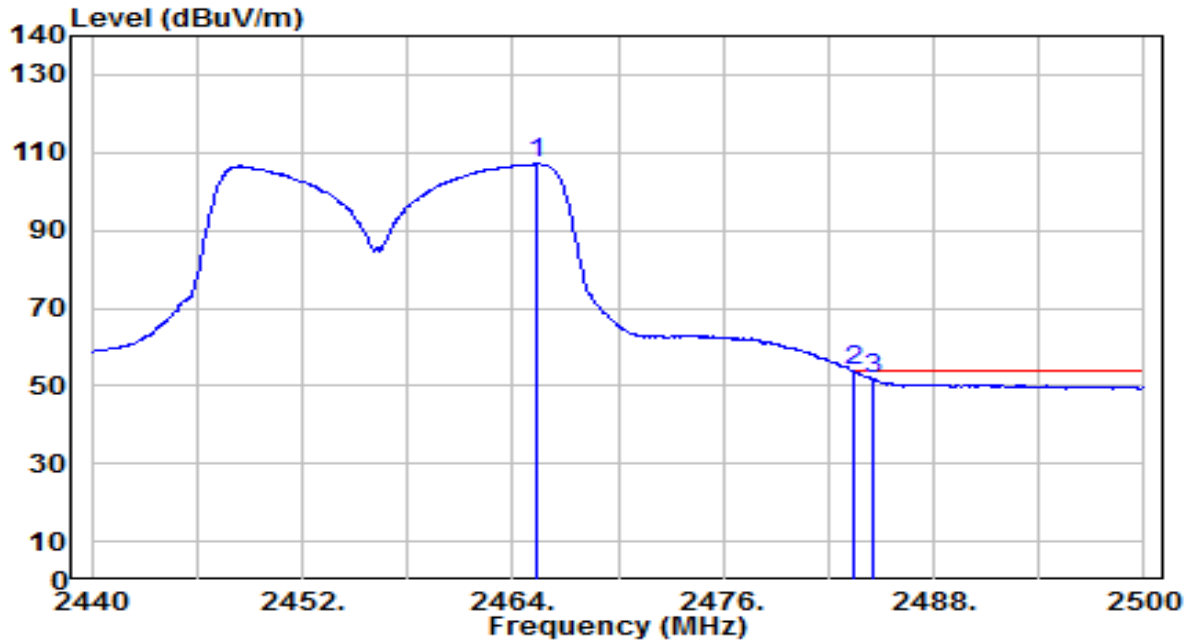


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2465.380	74.11	33.02	107.13	N/A	N/A	145	140	Average
2	*	2483.500	20.64	33.09	53.73	-0.27	54.00	145	140	Average
3		2484.520	18.56	33.10	51.66	-2.34	54.00	145	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

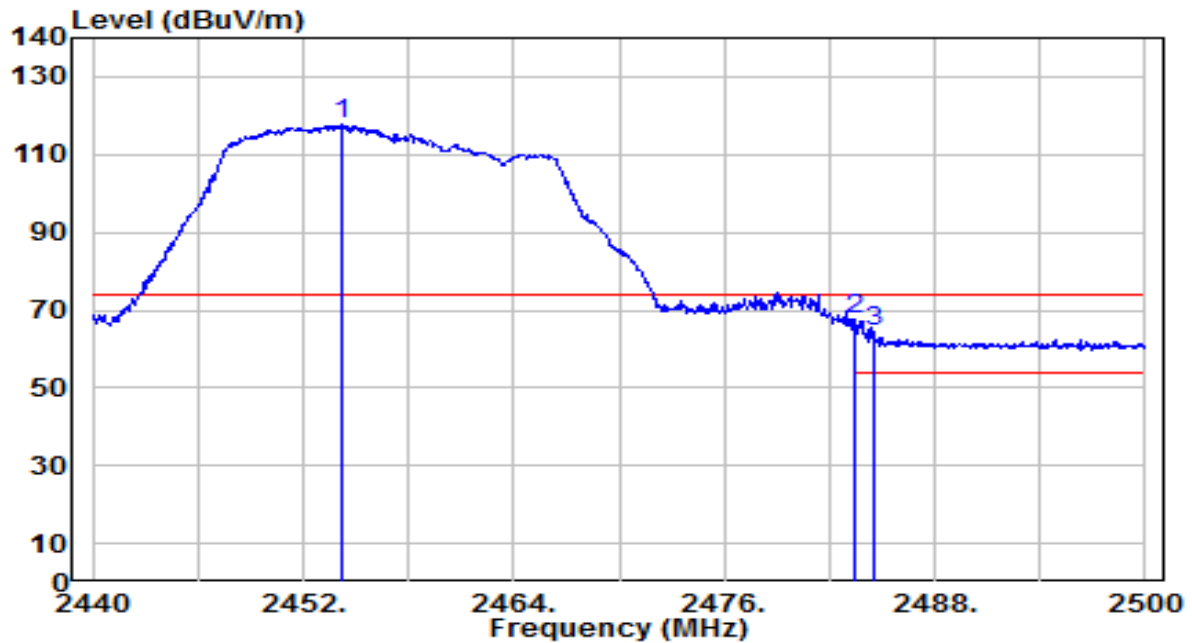


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.220	84.62	32.98	117.60	N/A	N/A	125	225	Peak
2	*	2483.500	34.41	33.09	67.50	-6.50	74.00	125	225	Peak
3		2484.520	31.13	33.10	64.23	-9.77	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

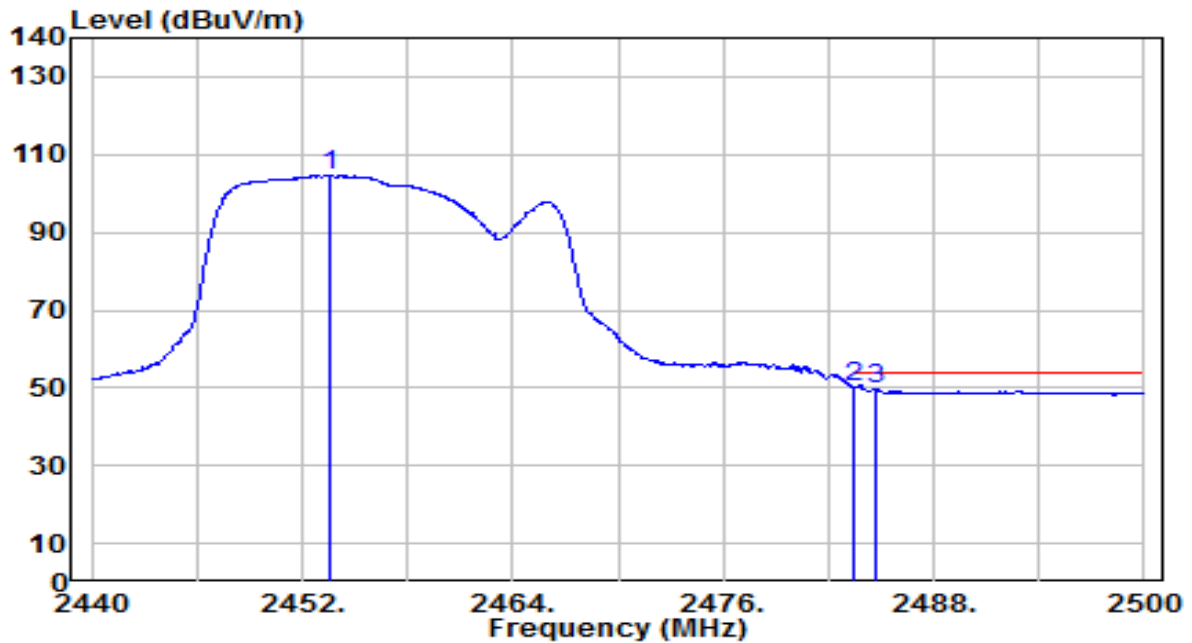


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2453.560	71.66	32.98	104.64	N/A	N/A	125	225	Average
2	*	2483.500	16.93	33.09	50.02	-3.98	54.00	125	225	Average
3		2484.700	16.82	33.10	49.92	-4.08	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

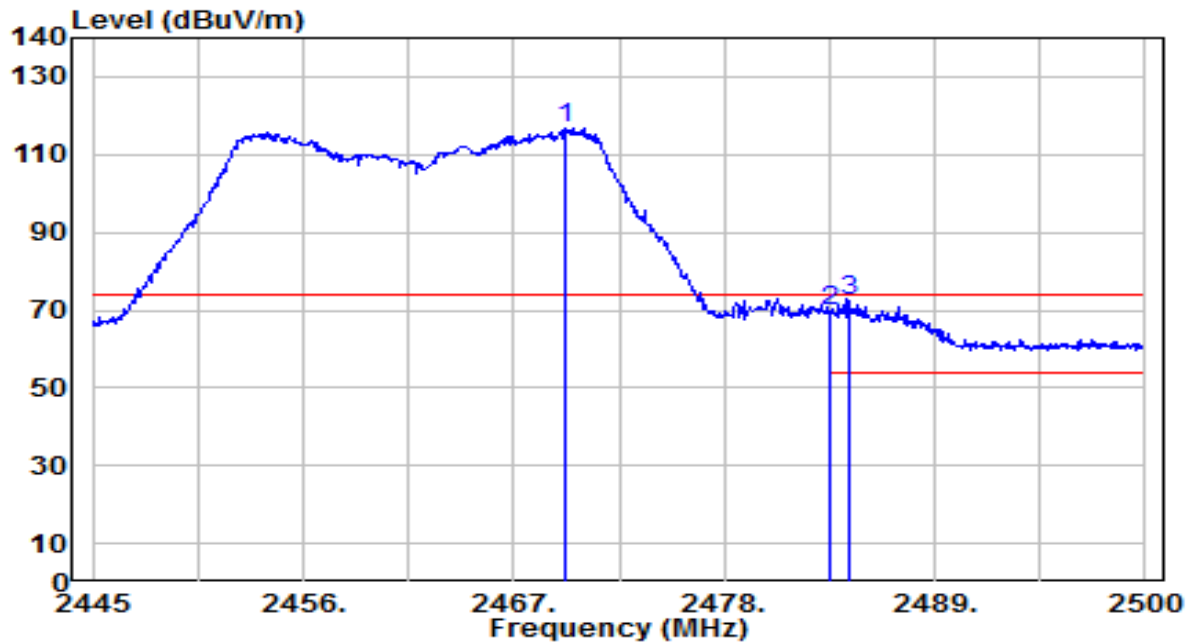


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.640	83.59	33.04	116.63	N/A	N/A	145	140	Peak
2	2483.500	36.46	33.09	69.55	-4.45	74.00	145	140	Peak
3	* 2484.490	39.50	33.10	72.59	-1.41	74.00	145	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

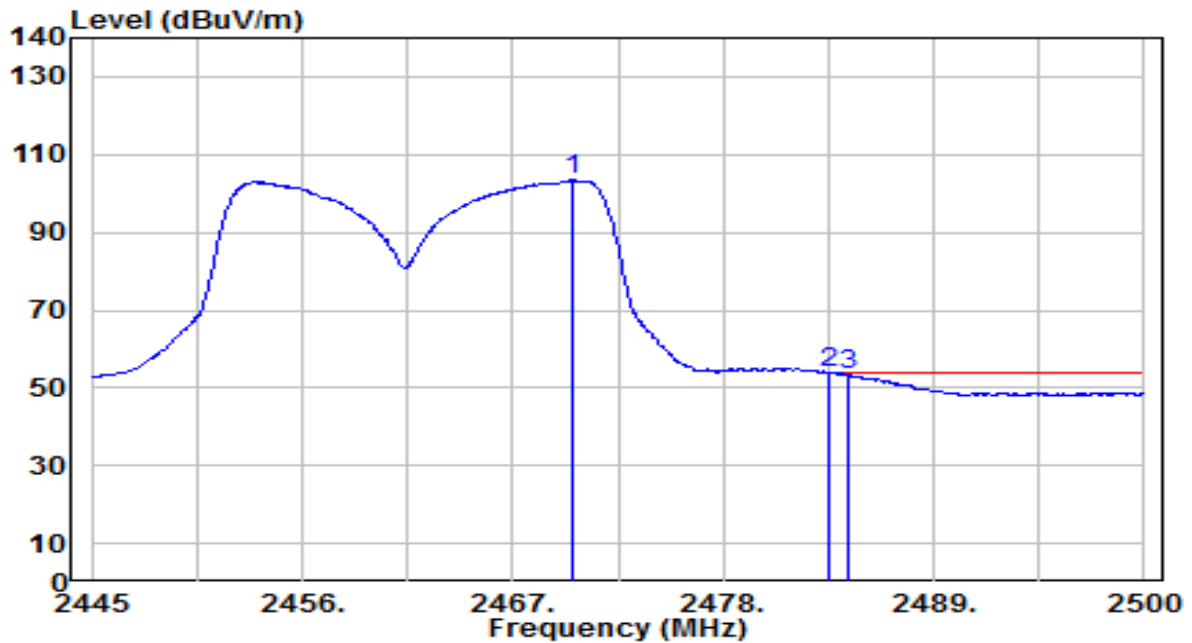


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2470.080	70.36	33.04	103.40	N/A	N/A	145	140	Average
2	*	2483.500	20.71	33.09	53.80	-0.20	54.00	145	140	Average
3		2484.490	20.41	33.10	53.51	-0.49	54.00	145	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

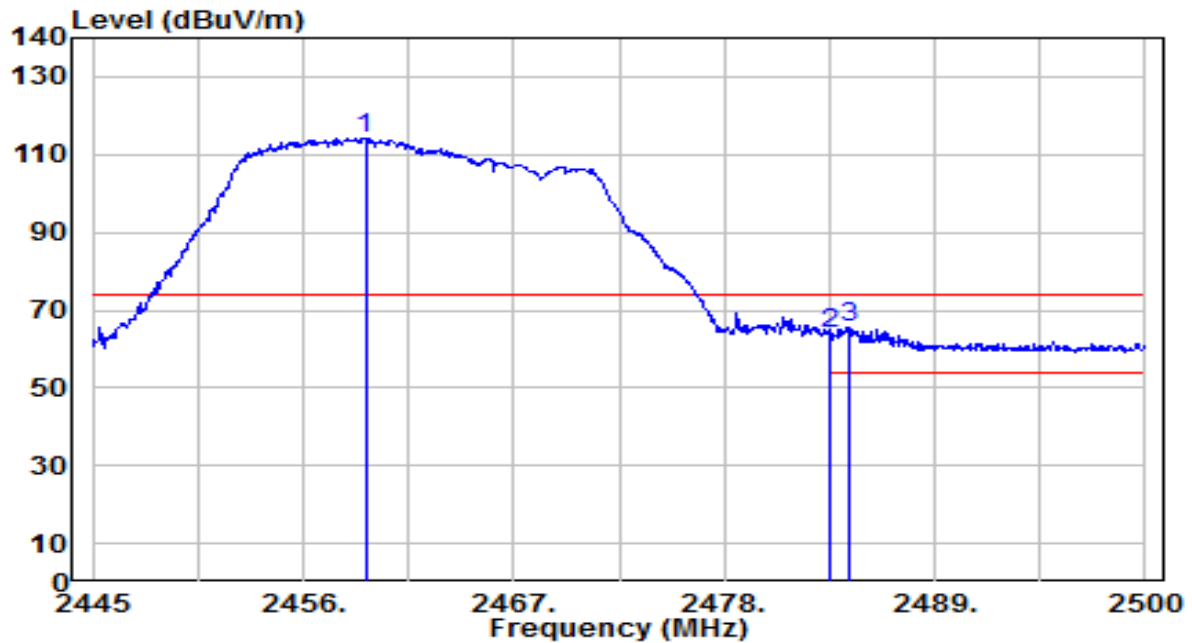


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.245	81.30	33.00	114.30	N/A	N/A	125	225	Peak
2	2483.500	30.73	33.09	63.83	-10.17	74.00	125	225	Peak
3	* 2484.600	32.51	33.10	65.61	-8.39	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

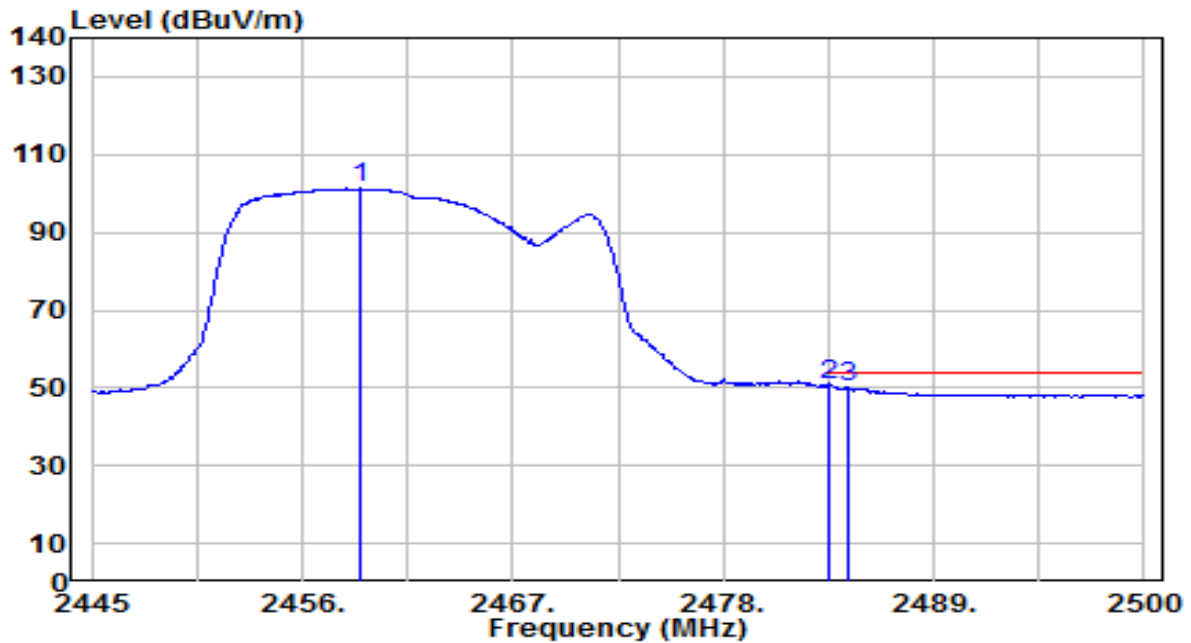


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.080	68.26	33.00	101.26	N/A	N/A	125	225	Average
2	*	2483.500	17.78	33.09	50.88	-3.12	54.00	125	225	Average
3		2484.545	17.01	33.10	50.11	-3.89	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

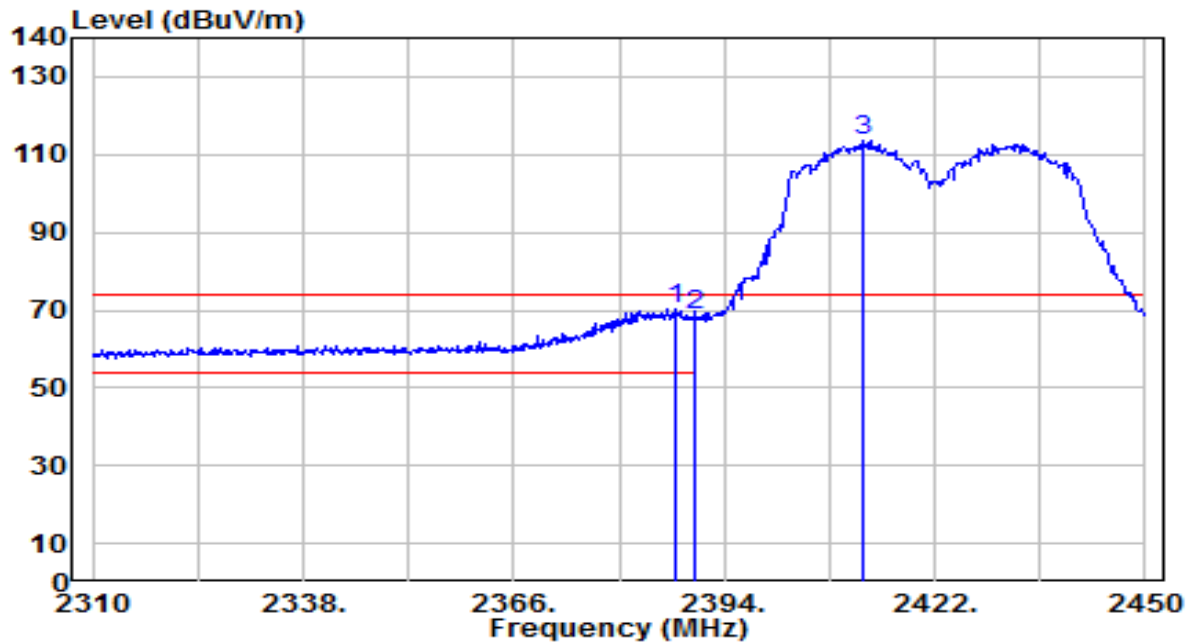


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.700	37.57	32.72	70.29	-3.71	74.00	140	140	Peak
2		2390.000	36.21	32.73	68.94	-5.06	74.00	140	140	Peak
3		2412.620	81.00	32.82	113.82	N/A	N/A	140	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

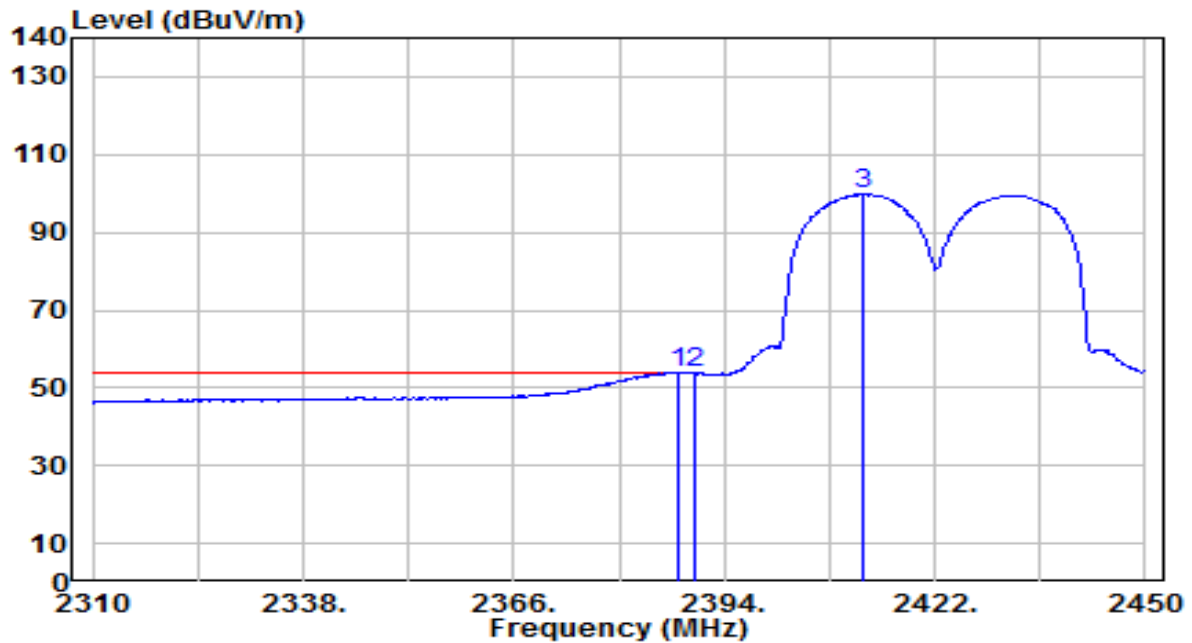


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.840	21.15	32.72	53.87	-0.13	54.00	140	140	Average
2		2390.000	20.92	32.73	53.64	-0.36	54.00	140	140	Average
3		2412.620	67.01	32.82	99.83	N/A	N/A	140	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

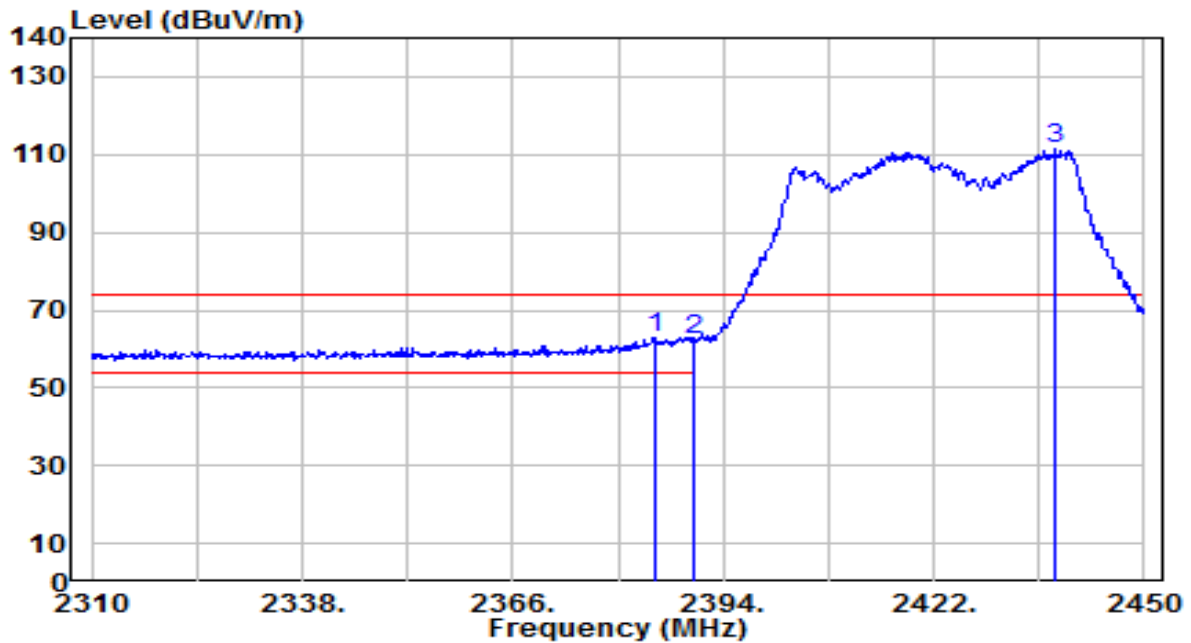


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.040	30.30	32.71	63.01	-10.99	74.00	125	230	Peak
2		2390.000	29.40	32.73	62.12	-11.88	74.00	125	230	Peak
3		2438.240	78.36	32.92	111.27	N/A	N/A	125	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

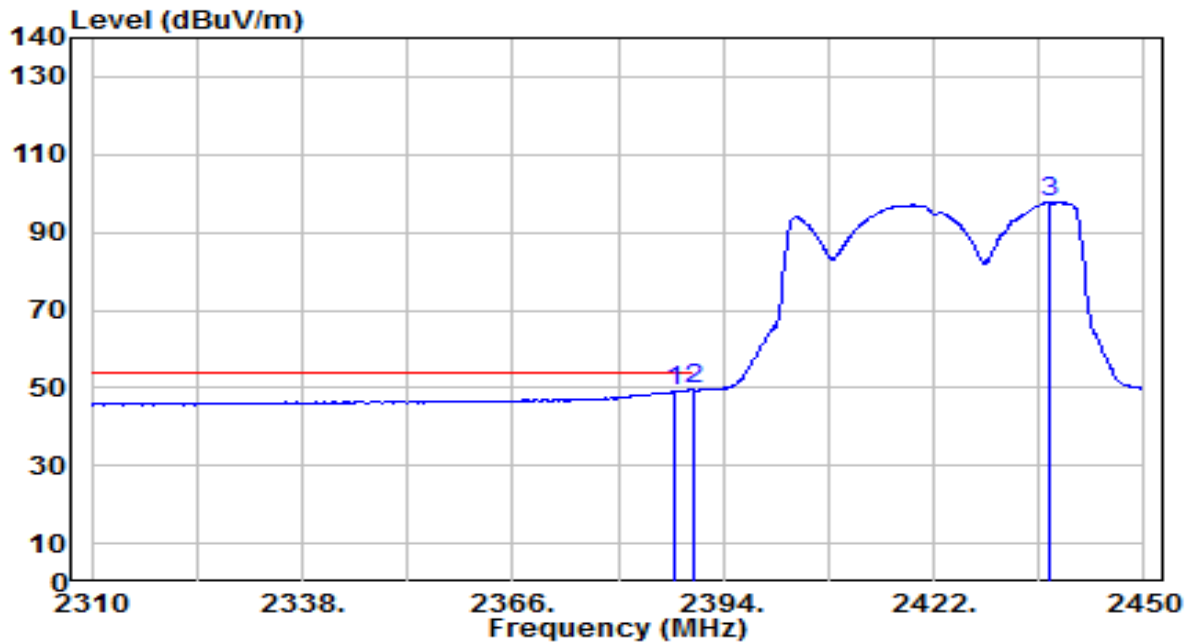


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.420	16.32	32.72	49.03	-4.97	54.00	125	230	Average
2	*	2390.000	16.80	32.73	49.52	-4.48	54.00	125	230	Average
3		2437.400	64.74	32.91	97.66	N/A	N/A	125	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

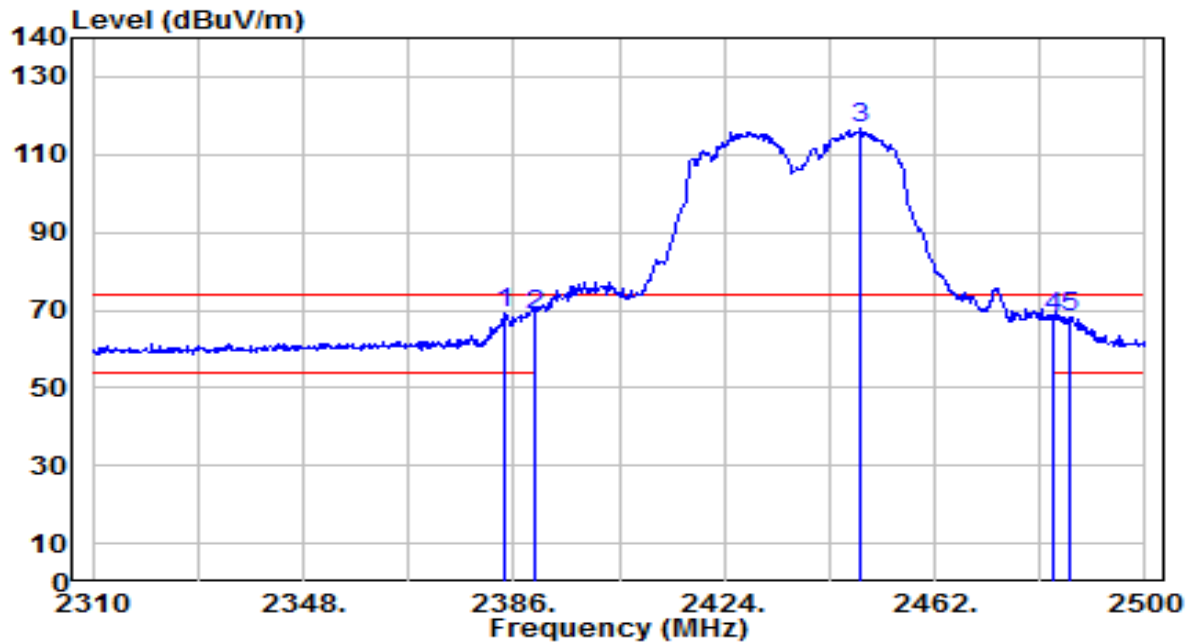


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.480	36.58	32.70	69.29	-4.71	74.00	120	135	Peak
2		2390.000	35.95	32.73	68.68	-5.32	74.00	120	135	Peak
3		2448.700	83.95	32.96	116.90	N/A	N/A	120	135	Peak
4		2483.500	35.04	33.09	68.14	-5.86	74.00	120	135	Peak
5		2486.510	35.15	33.11	68.26	-5.74	74.00	120	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

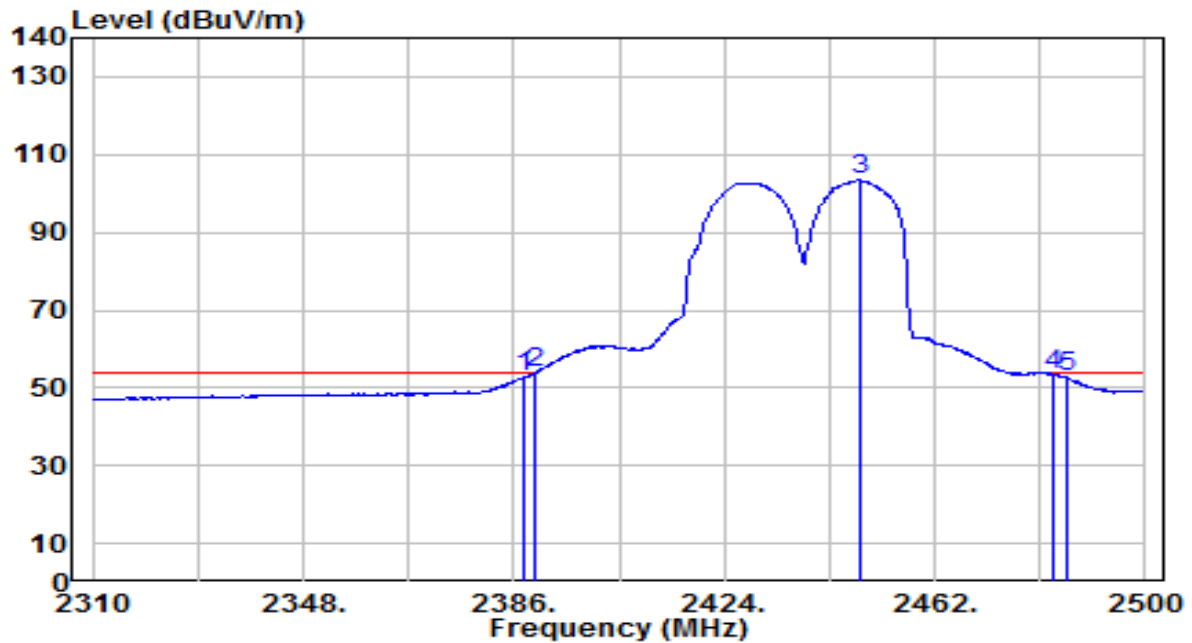


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.900	19.96	32.72	52.67	-1.33	54.00	120	135	Average
2	*	2390.000	21.13	32.73	53.85	-0.15	54.00	120	135	Average
3		2448.510	70.48	32.96	103.44	N/A	N/A	120	135	Average
4		2483.500	20.30	33.09	53.40	-0.60	54.00	120	135	Average
5		2485.750	19.62	33.10	52.72	-1.28	54.00	120	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

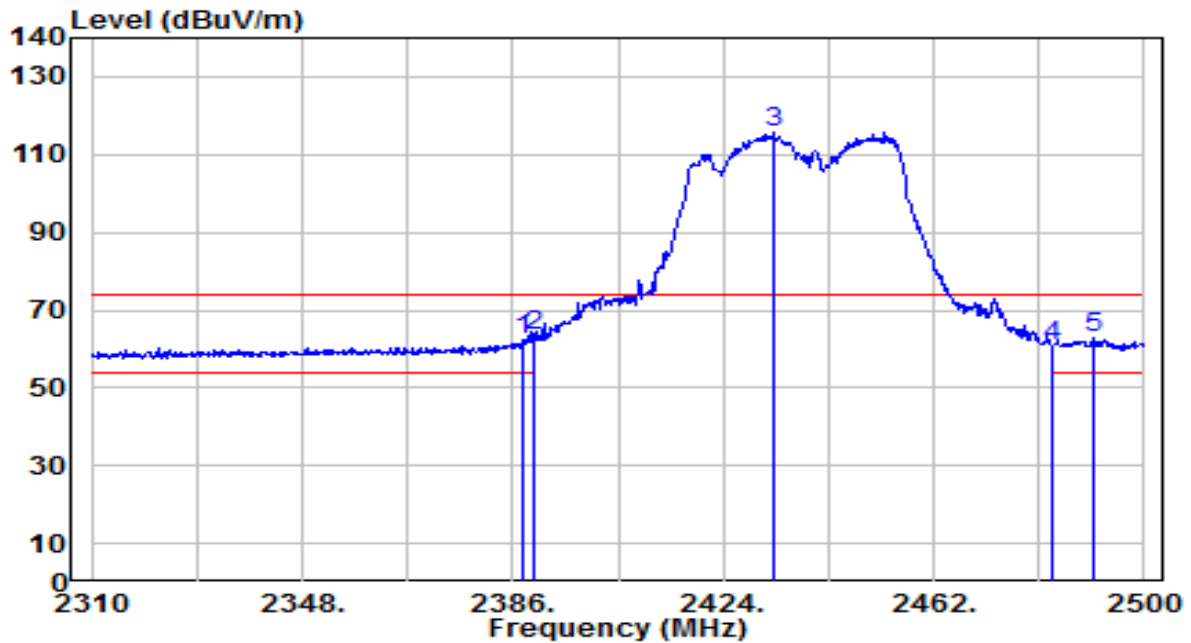


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	29.59	32.72	62.31	-11.69	74.00	265	155	Peak
2	* 2390.000	30.73	32.73	63.45	-10.55	74.00	265	155	Peak
3	2433.120	82.61	32.90	115.50	N/A	N/A	265	155	Peak
4	2483.500	27.63	33.09	60.73	-13.27	74.00	265	155	Peak
5	2491.070	29.52	33.12	62.65	-11.35	74.00	265	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

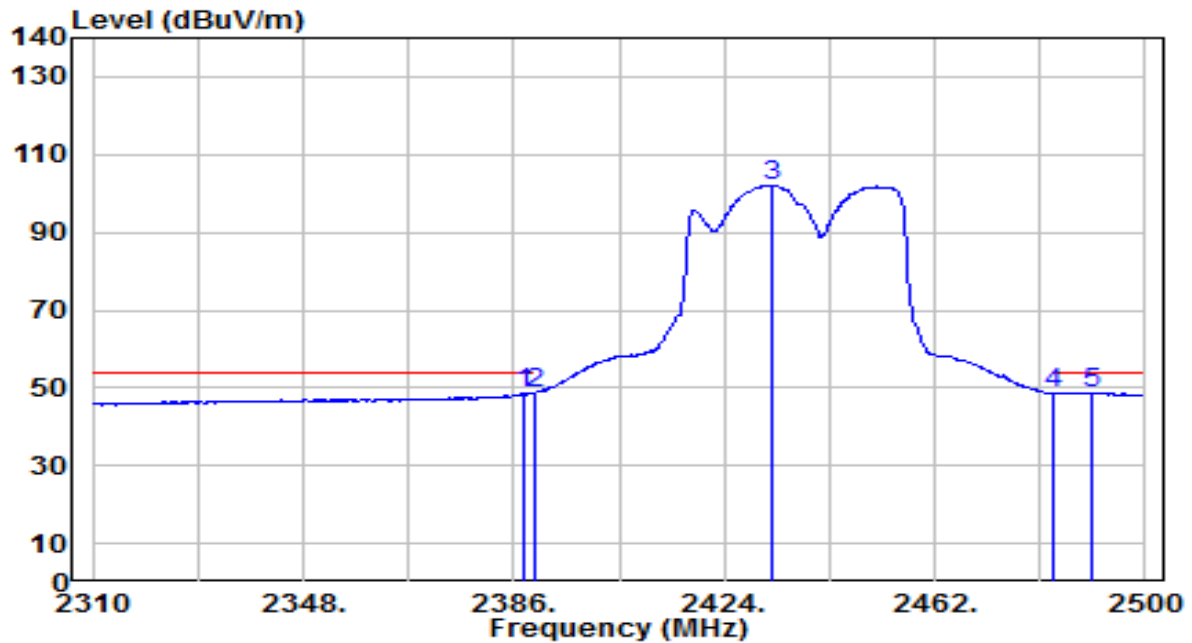


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	15.84	32.72	48.56	-5.44	54.00	265	155	Average
2	2390.000	16.11	32.73	48.84	-5.16	54.00	265	155	Average
3	2432.550	69.21	32.89	102.10	N/A	N/A	265	155	Average
4	2483.500	15.57	33.09	48.66	-5.34	54.00	265	155	Average
5	* 2490.310	15.75	33.12	48.87	-5.13	54.00	265	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

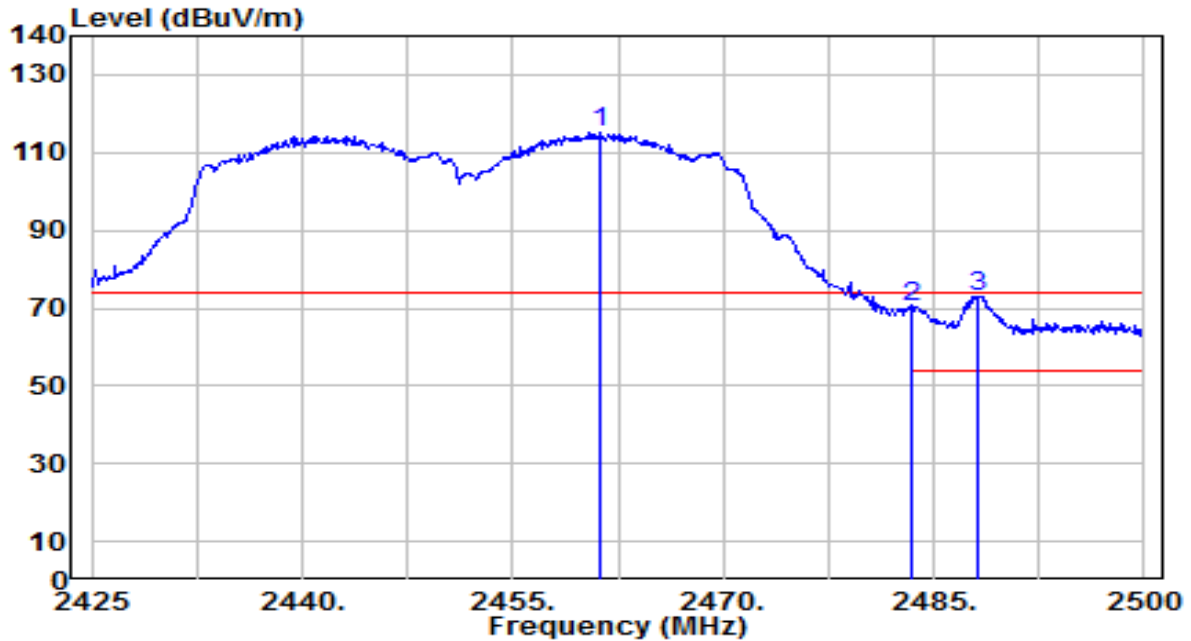


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.225	82.30	33.01	115.31	N/A	N/A	145	140	Peak
2	2483.500	37.22	33.09	70.32	-3.68	74.00	145	140	Peak
3	* 2488.150	40.04	33.11	73.15	-0.85	74.00	145	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

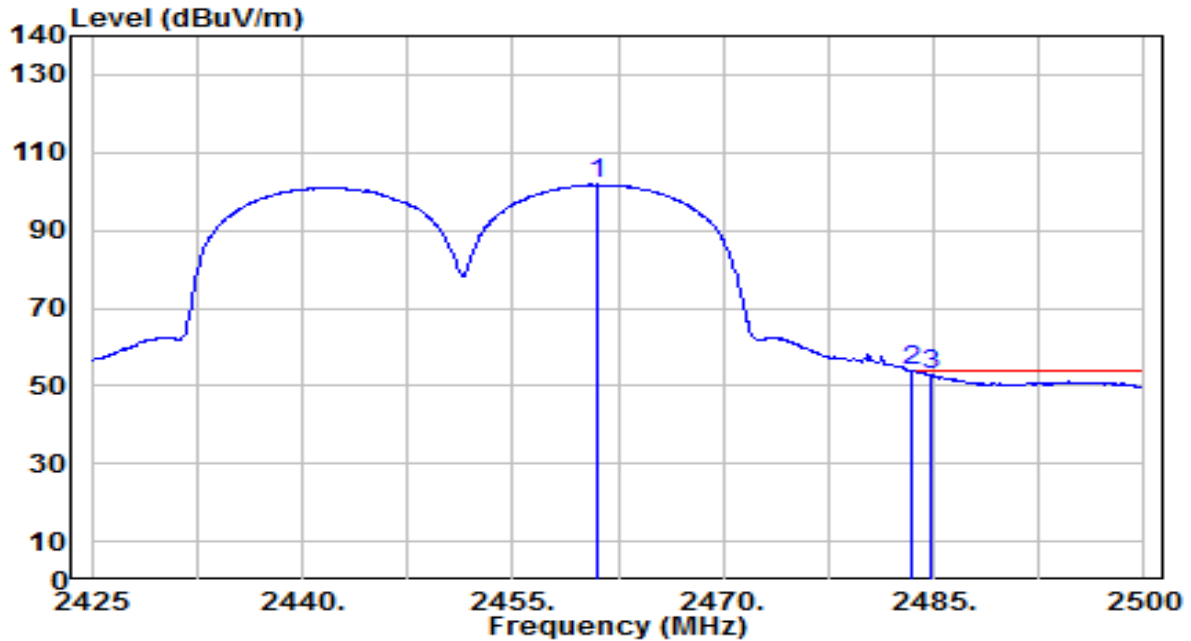


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.075	68.77	33.01	101.78	N/A	N/A	145	140	Average
2	*	2483.500	20.78	33.09	53.88	-0.12	54.00	145	140	Average
3		2484.775	19.76	33.10	52.86	-1.14	54.00	145	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

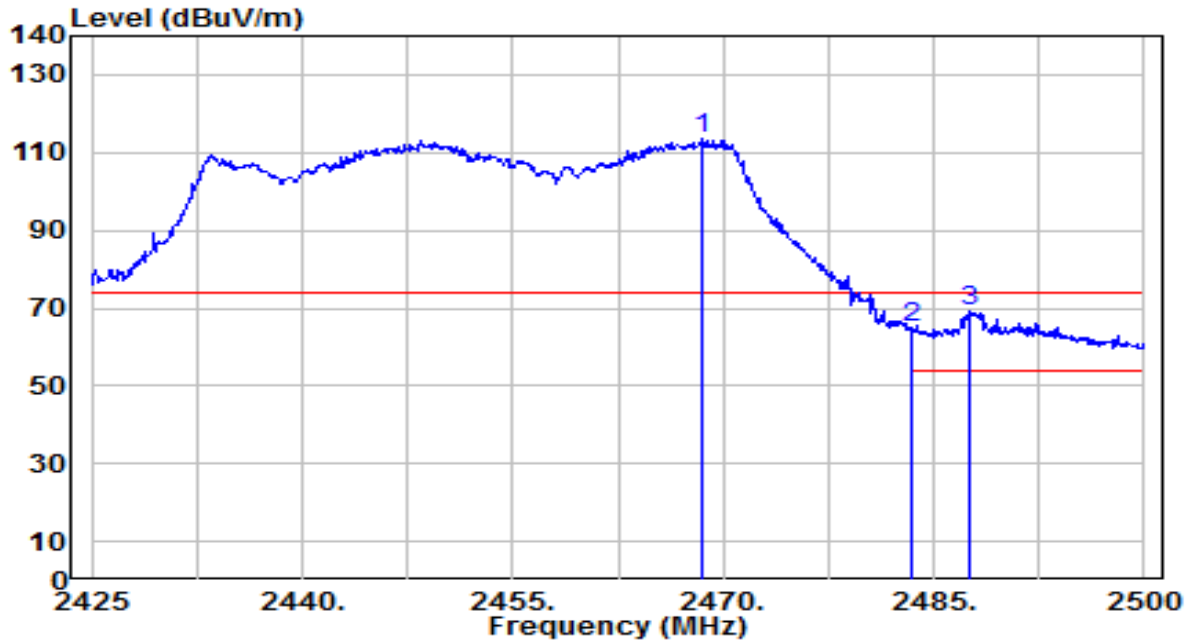


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.575	80.43	33.04	113.46	N/A	N/A	125	225	Peak
2	2483.500	31.86	33.09	64.96	-9.04	74.00	125	225	Peak
3	* 2487.550	35.91	33.11	69.02	-4.98	74.00	125	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

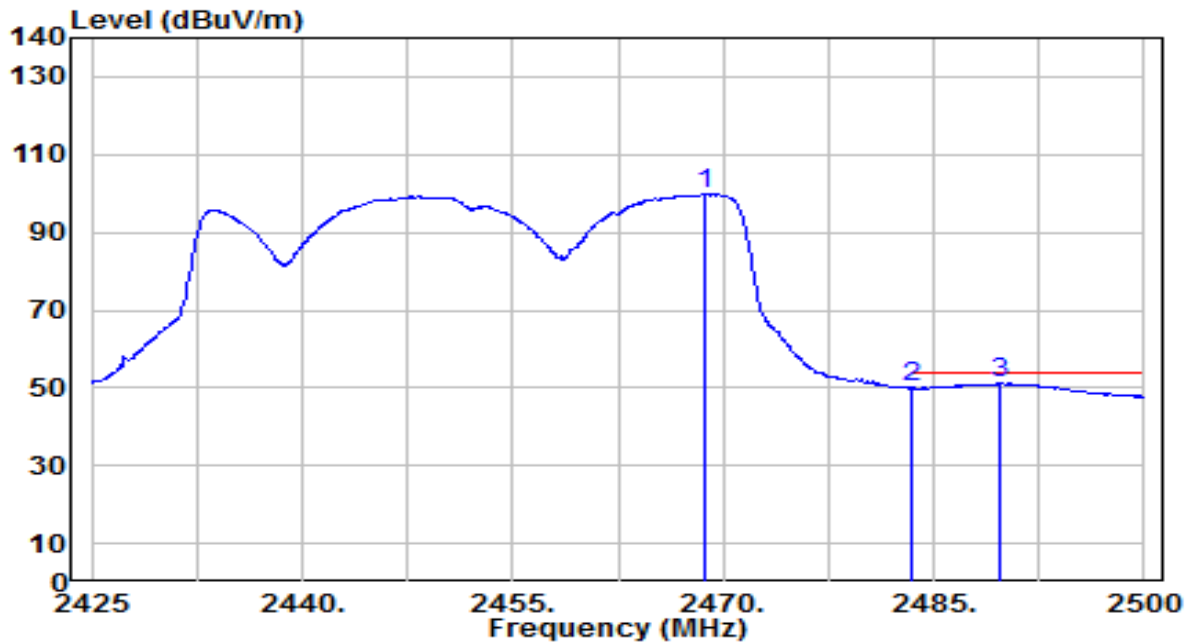

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.650	66.78	33.04	99.82	N/A	N/A	125	225	Average
2	2483.500	16.95	33.09	50.04	-3.96	54.00	125	225	Average
3	* 2489.650	17.96	33.12	51.08	-2.92	54.00	125	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

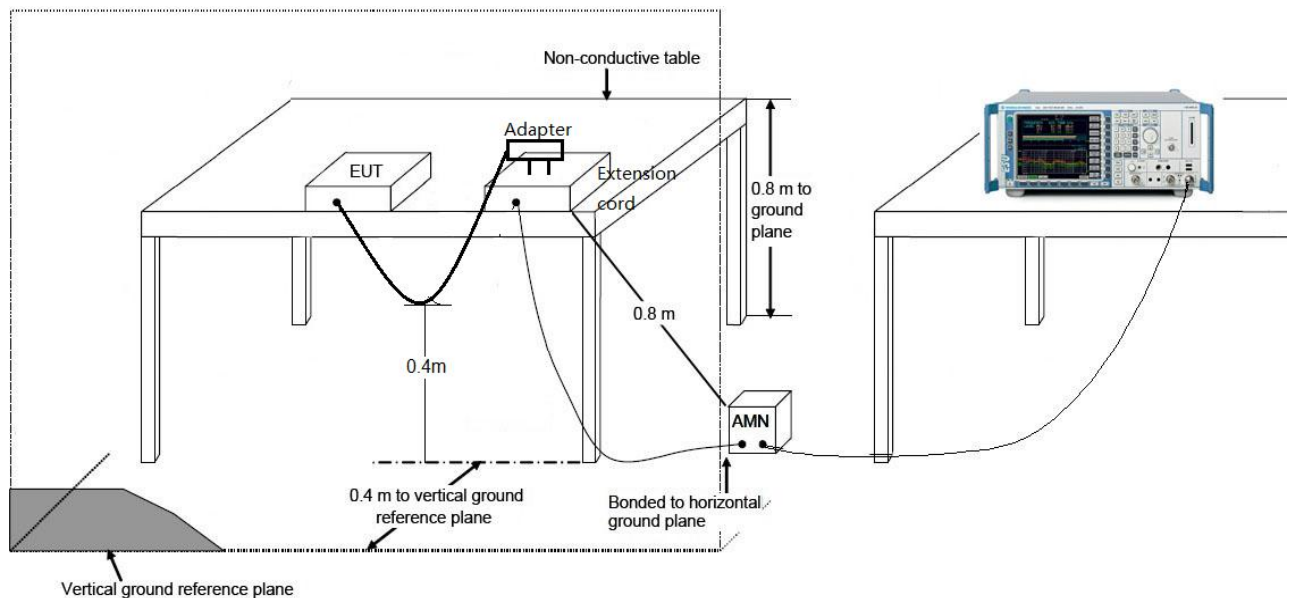

7.8.3. Test Result

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-04-30
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.0°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

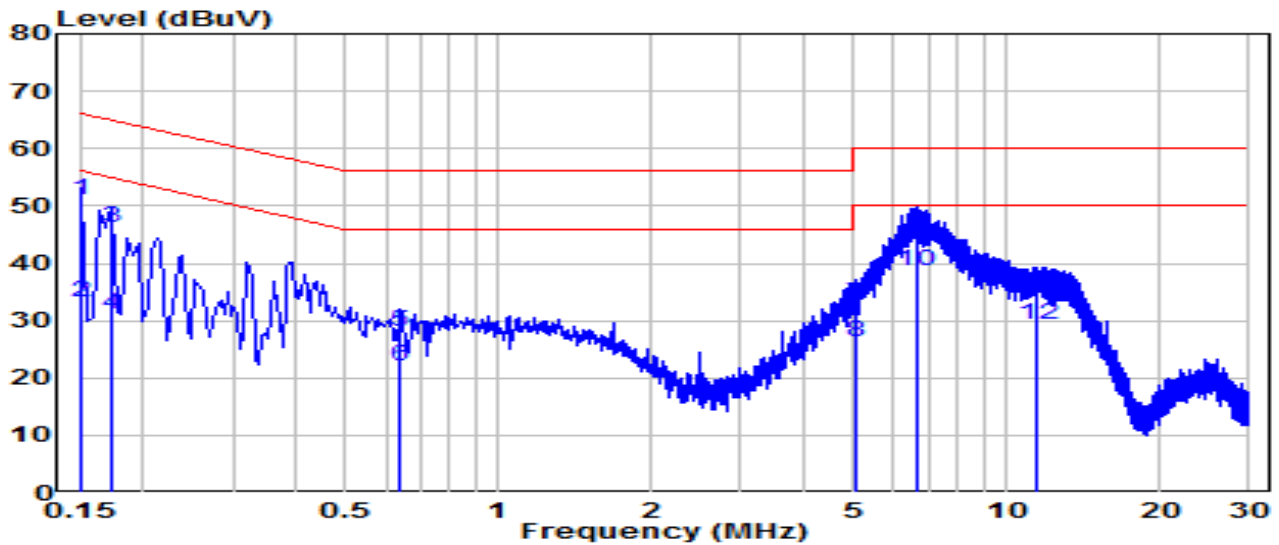


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	41.52	9.63	51.15	-14.85	66.00	QP
2	0.150	23.72	9.63	33.35	-22.65	56.00	Average
3	0.172	36.48	9.63	46.11	-18.73	64.84	QP
4	0.172	21.33	9.63	30.95	-23.89	54.84	Average
5	0.640	18.56	9.65	28.21	-27.79	56.00	QP
6	0.640	12.43	9.65	22.08	-23.92	46.00	Average
7	5.073	23.05	9.75	32.79	-27.21	60.00	QP
8	5.073	16.46	9.75	26.21	-23.79	50.00	Average
9	* 6.625	35.22	9.79	45.01	-14.99	60.00	QP
10	* 6.625	28.87	9.79	38.66	-11.34	50.00	Average
11	11.457	24.93	9.88	34.81	-25.19	60.00	QP
12	11.457	19.36	9.88	29.24	-20.76	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-04-30
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.0°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

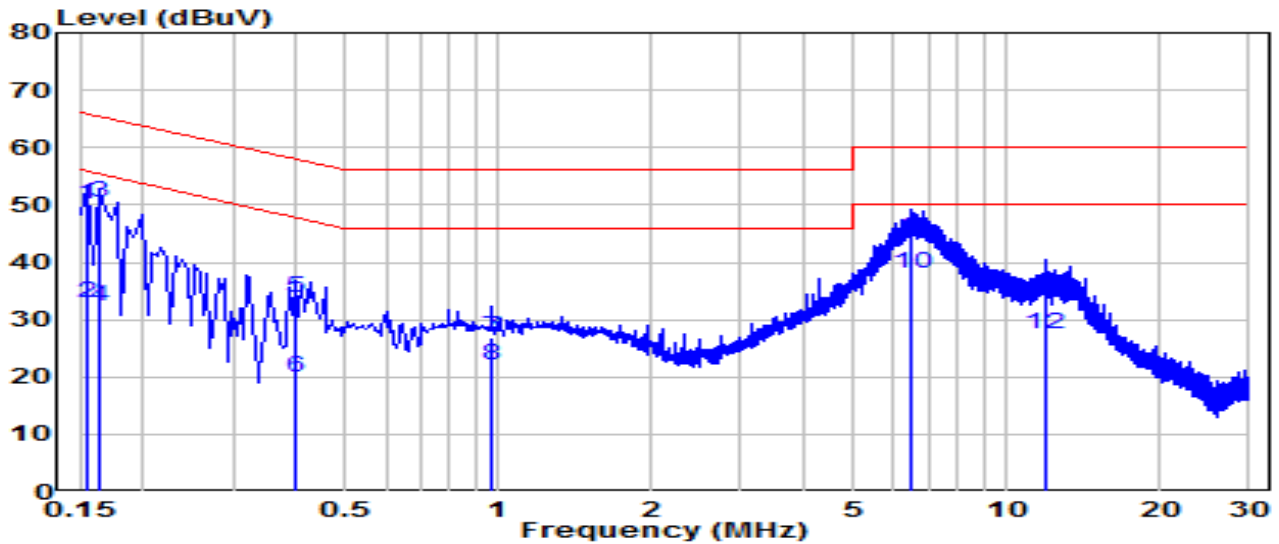

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	40.43	9.63	50.06	-15.70	65.75	QP
2	0.154	23.41	9.63	33.04	-22.72	55.75	Average
3	0.163	40.72	9.63	50.35	-14.93	65.28	QP
4	0.163	22.77	9.63	32.39	-22.89	55.28	Average
5	0.397	24.15	9.63	33.79	-24.12	57.91	QP
6	0.397	10.43	9.63	20.07	-27.84	47.91	Average
7	0.969	17.16	9.67	26.83	-29.17	56.00	QP
8	0.969	12.23	9.67	21.90	-24.10	46.00	Average
9	* 6.526	34.28	9.78	44.07	-15.93	60.00	QP
10	* 6.526	28.17	9.78	37.95	-12.05	50.00	Average
11	11.867	23.67	9.89	33.56	-26.44	60.00	QP
12	11.867	17.73	9.89	27.62	-22.38	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2504TW0121-UT” file.

Appendix B : External Photograph

Refer to “2504TW0121-UE” file.

Appendix C : Internal Photograph

Refer to “2504TW0121-UI” file.

_____ The End _____