


802.11ax-HE160 Power Spectral Density - Ant 3

Channel 50 (5250MHz)




Channel 114 (5570MHz)

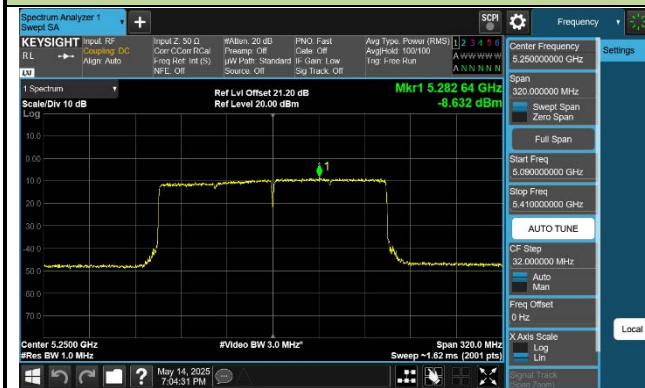


802.11be-EHT20 Power Spectral Density - Ant 3

Channel 36 (5180MHz)

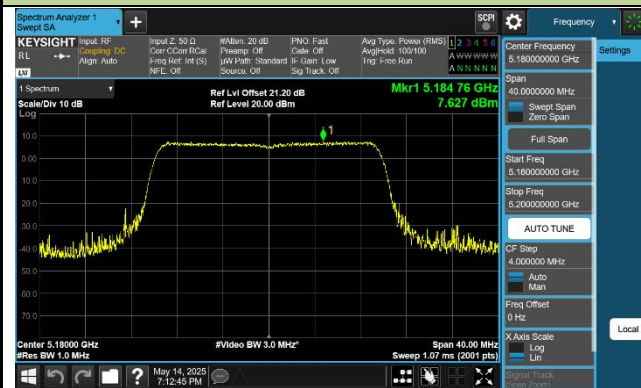

Channel 40 (5200MHz)

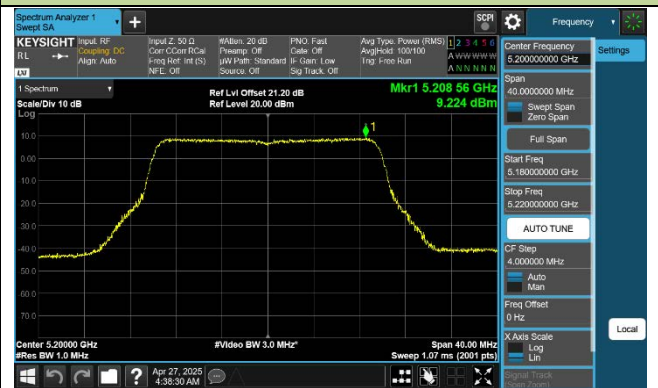

Channel 48 (5240MHz)




Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)

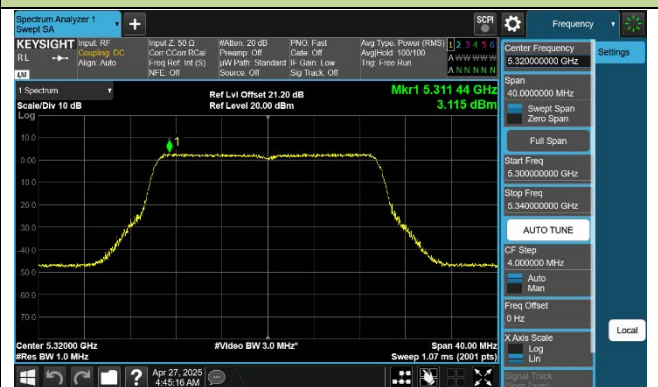


Channel 100 (5500MHz)




Channel 116 (5580MHz)



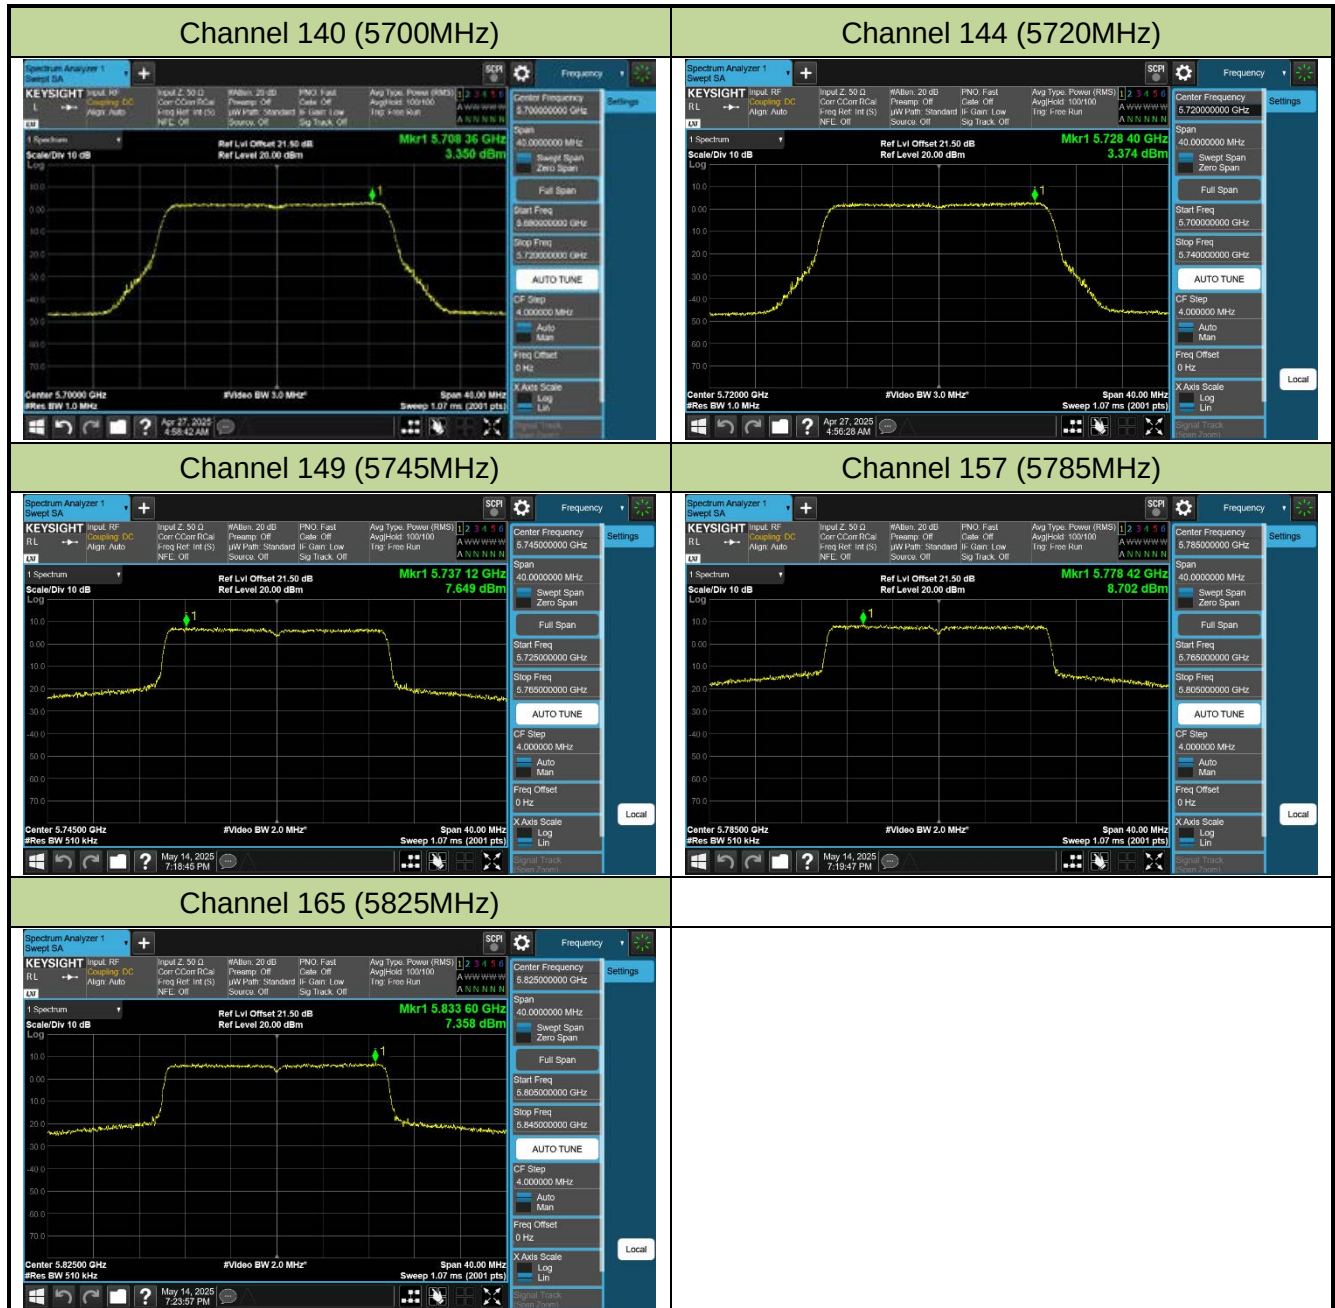


802.11be-EHT40 Power Spectral Density - Ant 3


Channel 38 (5190MHz)

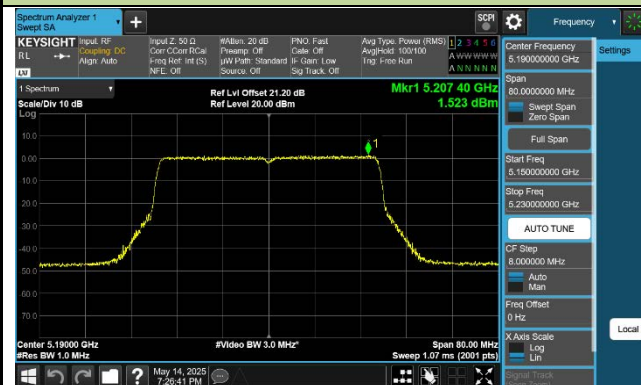

Channel 46 (5230MHz)

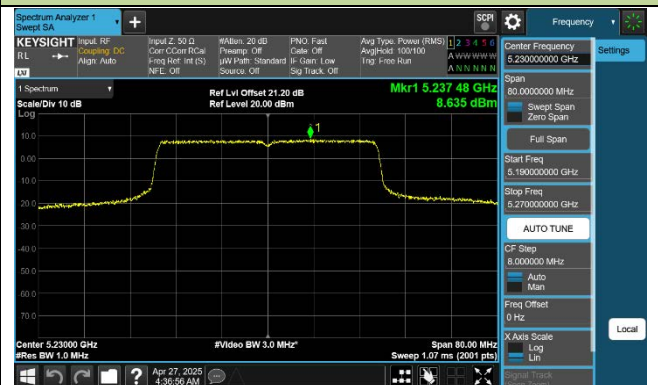

Channel 54 (5270MHz)

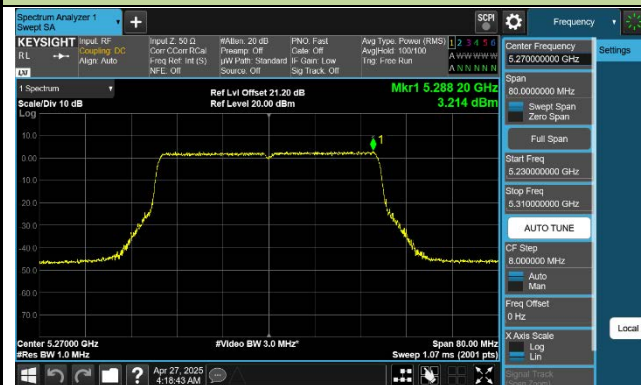

Channel 62 (5310MHz)



Channel 102 (5510MHz)




Channel 110 (5550MHz)




Channel 134 (5670MHz)



Channel 142 (5710MHz)

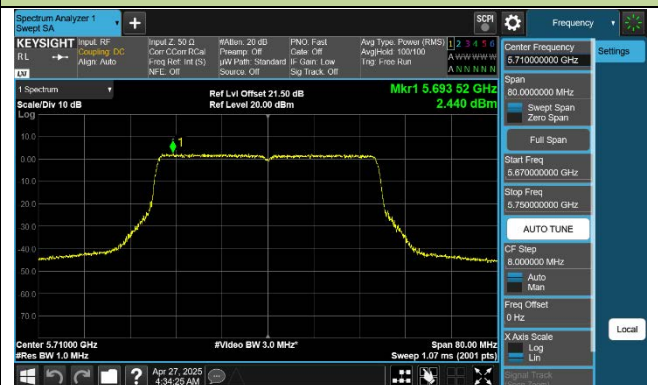

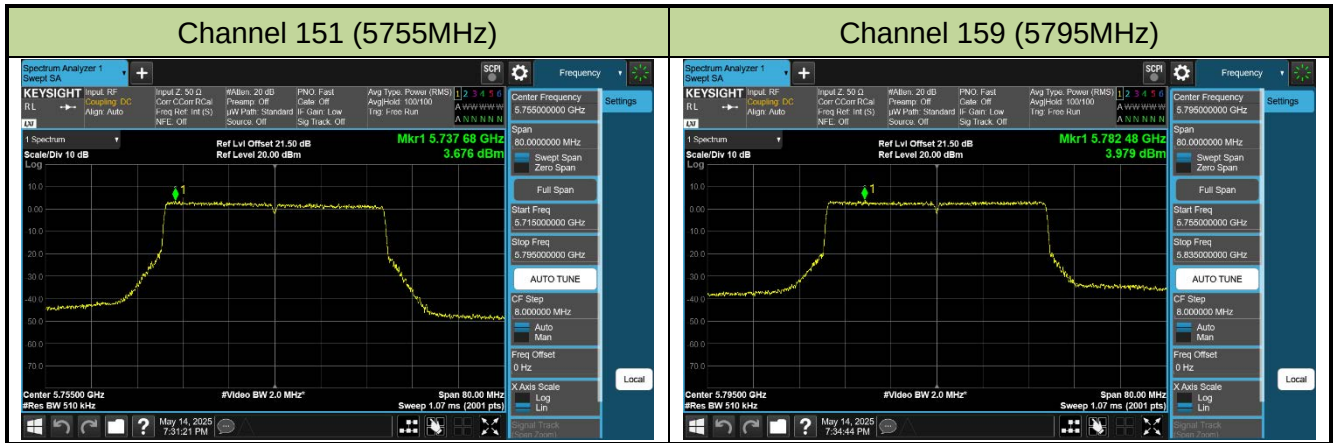

802.11be-EHT80 Power Spectral Density - Ant 3


Channel 42 (5210MHz)




Channel 58 (5290MHz)



Channel 106 (5530MHz)

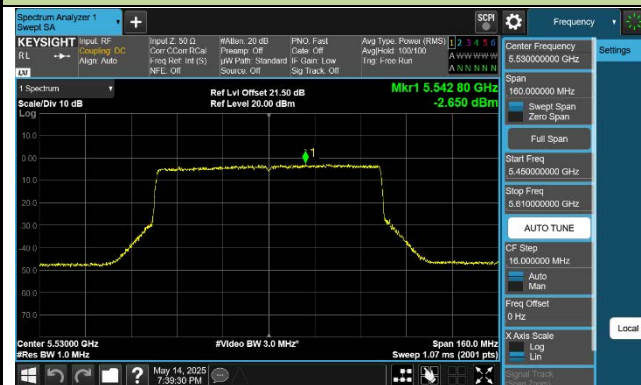

Channel 122 (5610MHz)

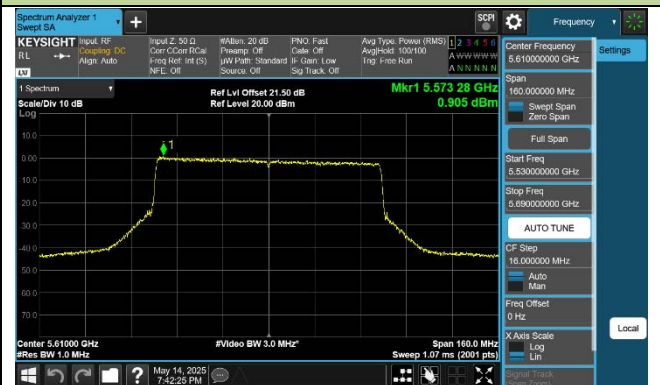

Channel 138 (5690MHz)




Channel 155 (5775MHz)



802.11be-EHT160 Power Spectral Density - Ant 3/ Ant 0 + 1 + 2 + 3

Channel 50 (5250MHz)

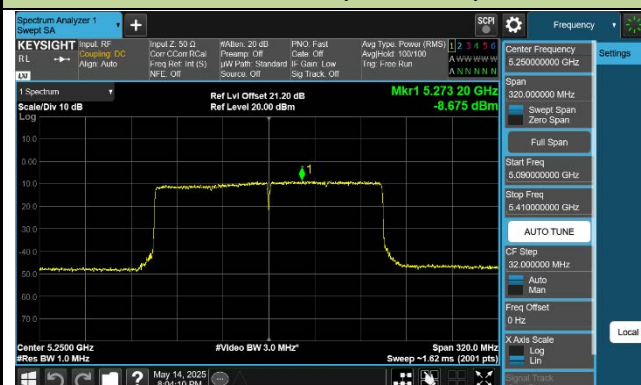

Channel 114 (5570MHz)



802.11be-EHT240 Power Spectral Density - Ant 3

Channel 130 (5650MHz)



7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

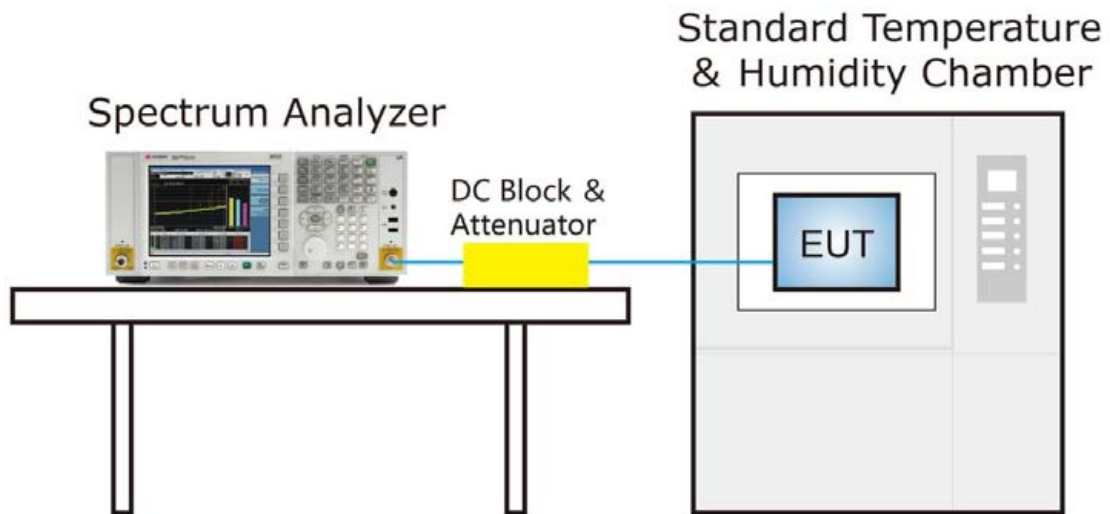

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

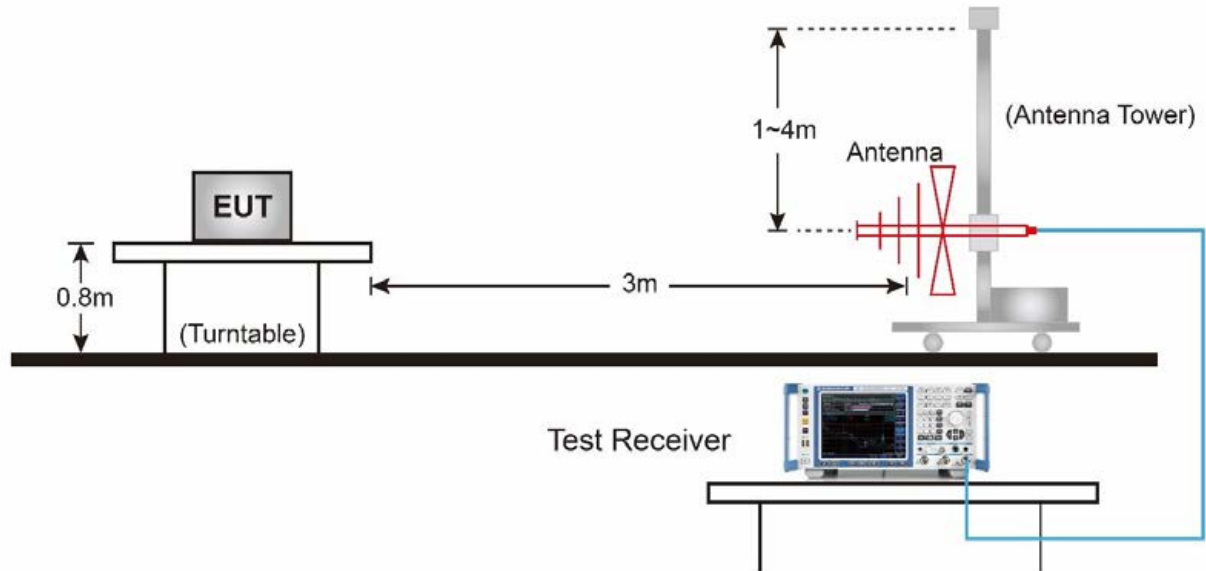


Above 1GHz Test Setup:

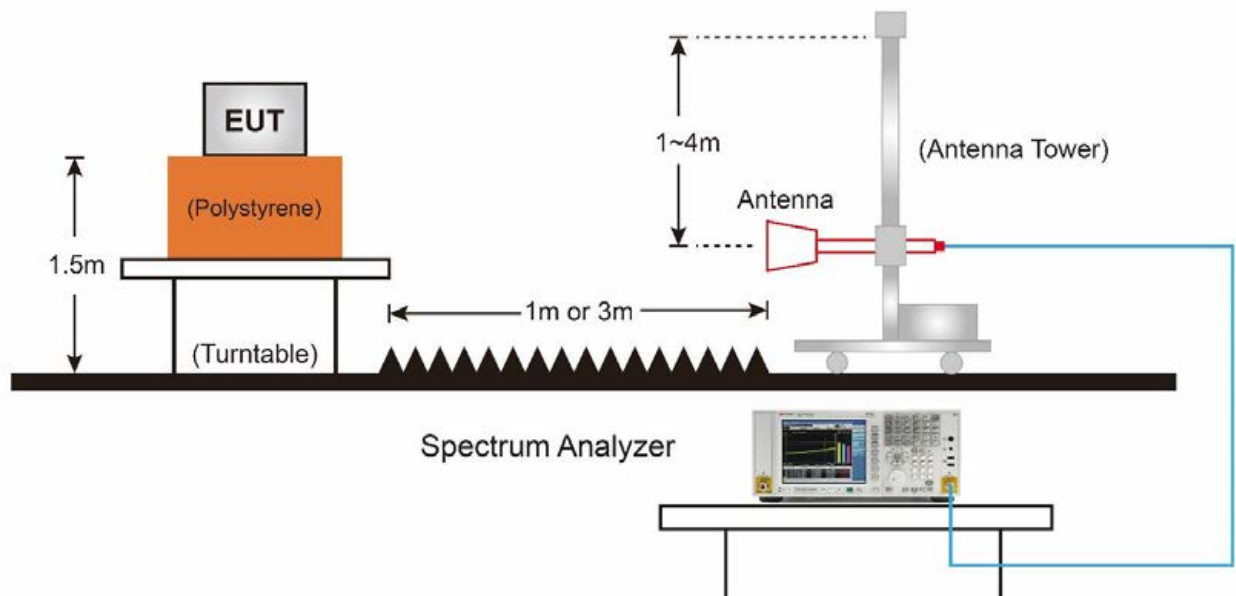

7.8.5. Test Result

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-10
Factor	VULB 9162	Temp. / Humidity	26°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

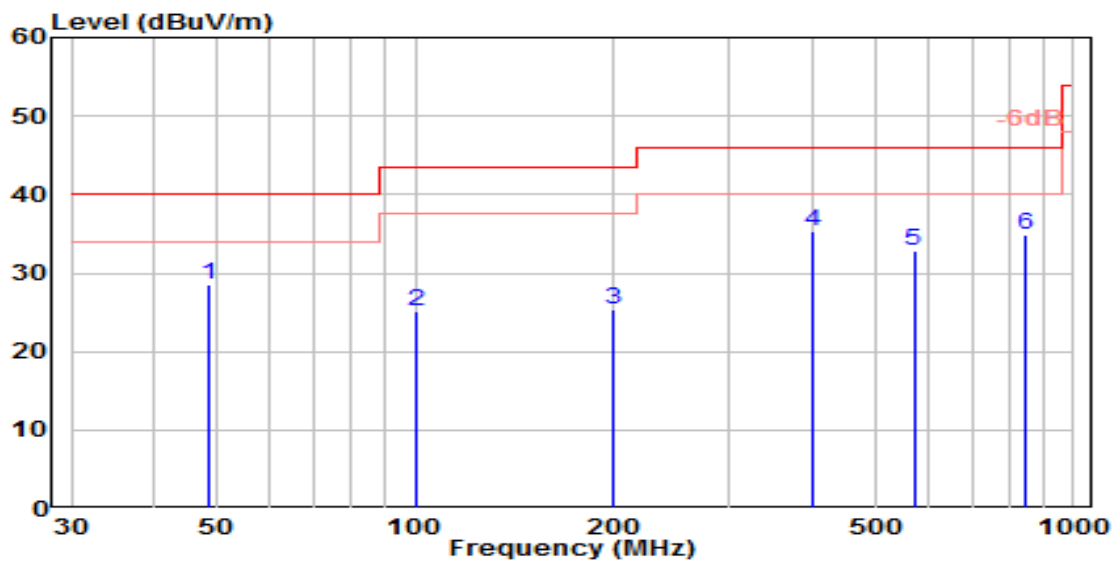


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	48.715	7.28	21.18	28.47	-11.53	40.00	100	255	QP
2	100.031	6.29	18.89	25.18	-18.32	43.50	150	270	QP
3	199.236	6.87	18.53	25.40	-18.10	43.50	150	280	QP
4	* 401.017	11.55	23.82	35.37	-10.63	46.00	100	10	QP
5	571.824	6.16	26.71	32.86	-13.14	46.00	150	55	QP
6	848.224	3.53	31.23	34.76	-11.24	46.00	150	180	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-10
Factor	VULB 9162	Temp. / Humidity	26°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

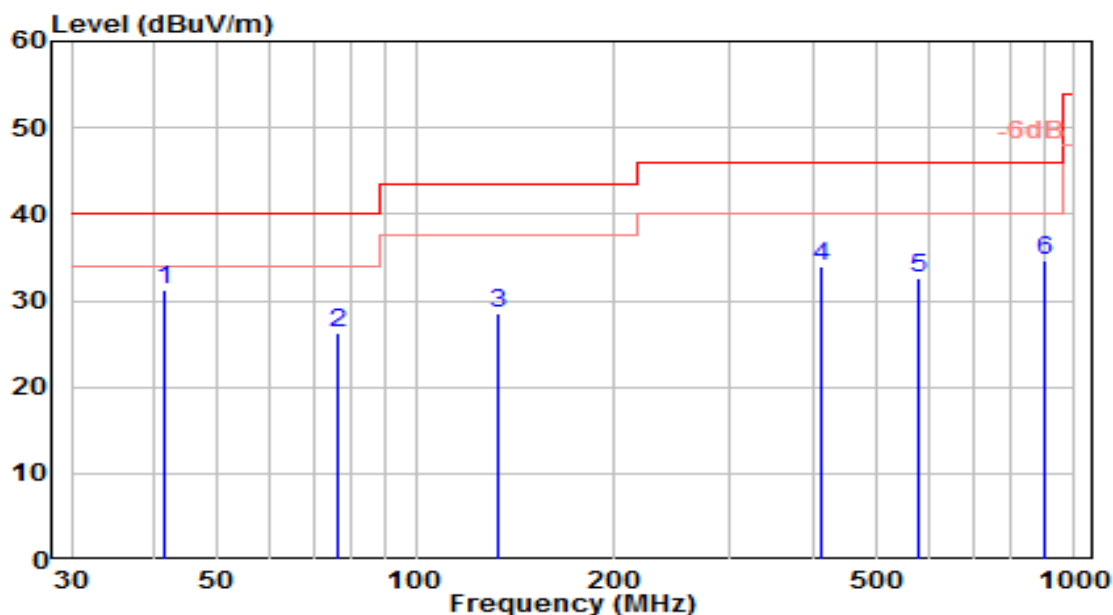


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.703	10.73	20.41	31.14	-8.86	40.00	100	140	QP
2		76.157	11.38	14.93	26.30	-13.70	40.00	150	70	QP
3		132.849	12.89	15.73	28.62	-14.88	43.50	150	295	QP
4		411.042	9.94	23.92	33.86	-12.14	46.00	100	280	QP
5		577.636	5.69	26.87	32.56	-13.44	46.00	100	220	QP
6		897.976	2.93	31.64	34.58	-11.42	46.00	100	185	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

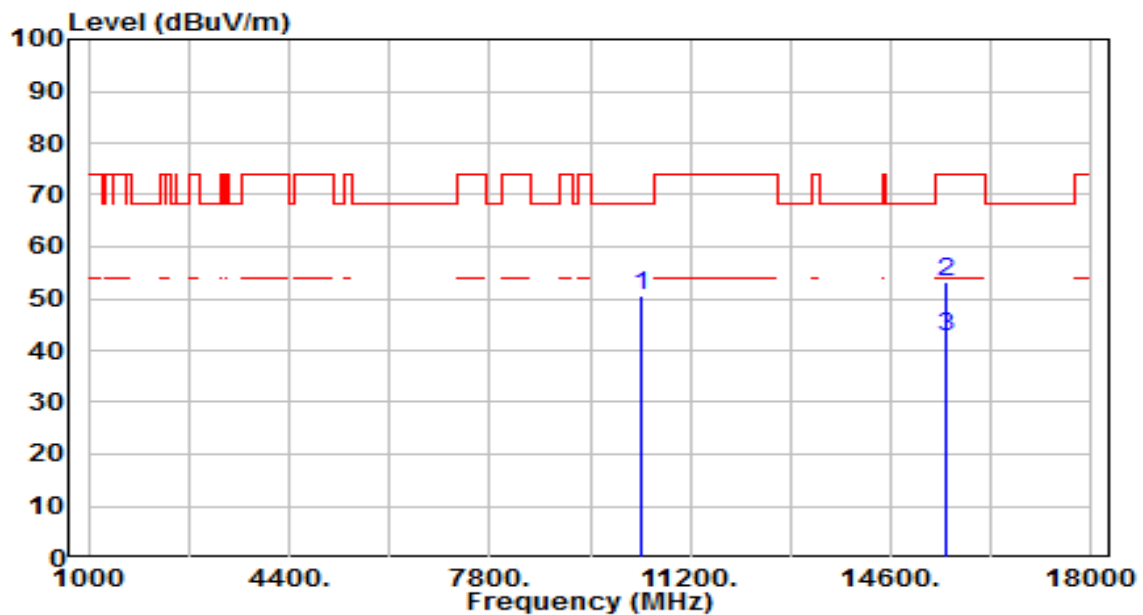


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	31.49	18.96	50.45	-17.75	68.20	100	261	Peak
2		15540.000	30.98	22.22	53.20	-20.80	74.00	100	193	Peak
3	*	15540.000	20.50	22.22	42.72	-11.28	54.00	100	193	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

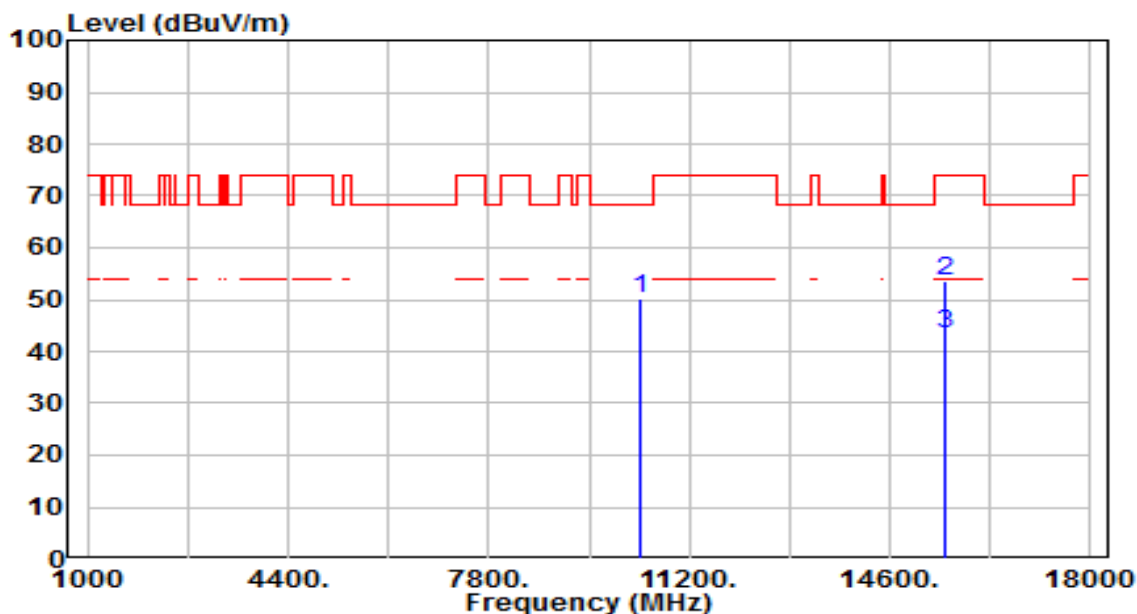


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	31.35	18.96	50.31	-17.89	68.20	100	130	Peak
2		15540.000	31.51	22.22	53.73	-20.27	74.00	100	182	Peak
3	*	15540.000	21.10	22.22	43.32	-10.68	54.00	100	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

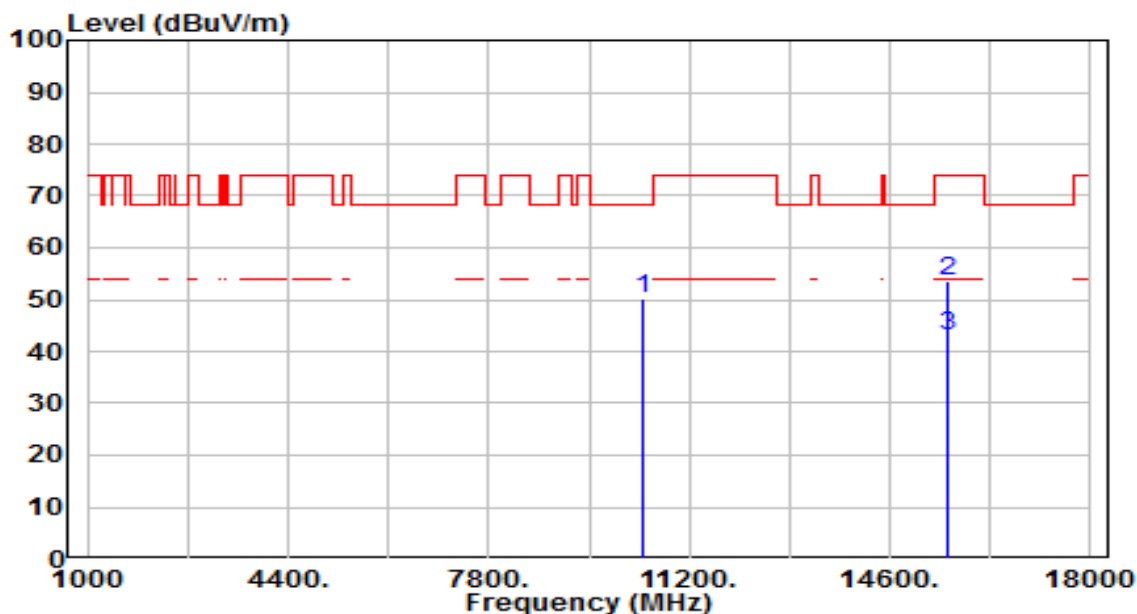


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	31.15	19.14	50.29	-17.91	68.20	100	24	Peak
2		15600.000	31.52	22.07	53.59	-20.41	74.00	100	45	Peak
3	*	15600.000	21.10	22.07	43.17	-10.83	54.00	100	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

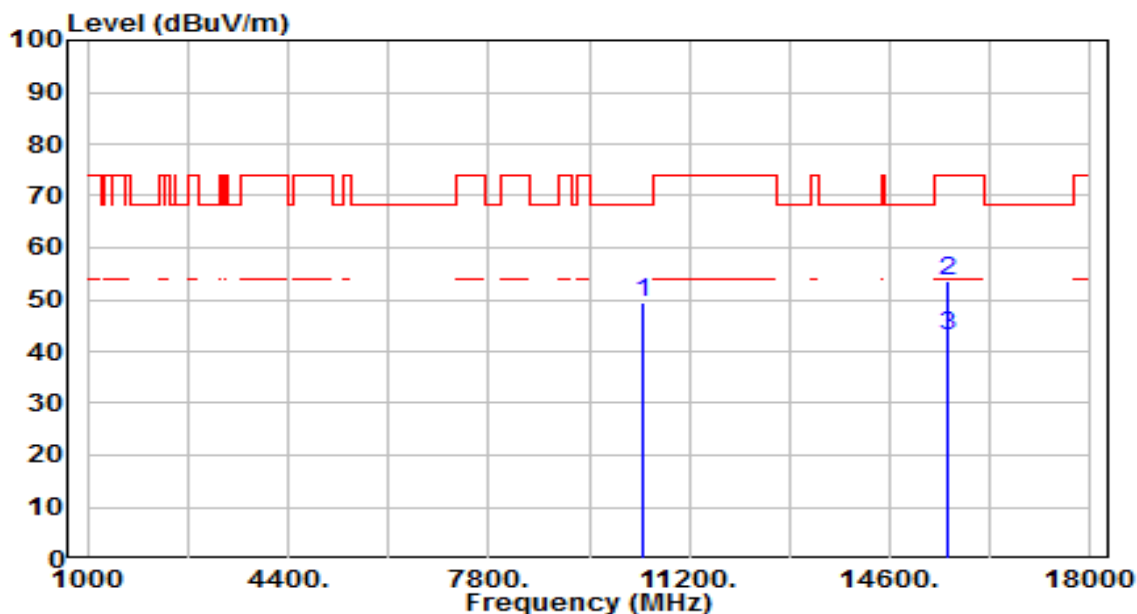


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	30.35	19.14	49.50	-18.70	68.20	100	357	Peak
2		15600.000	31.41	22.07	53.48	-20.52	74.00	100	34	Peak
3	*	15600.000	21.00	22.07	43.07	-10.93	54.00	100	34	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

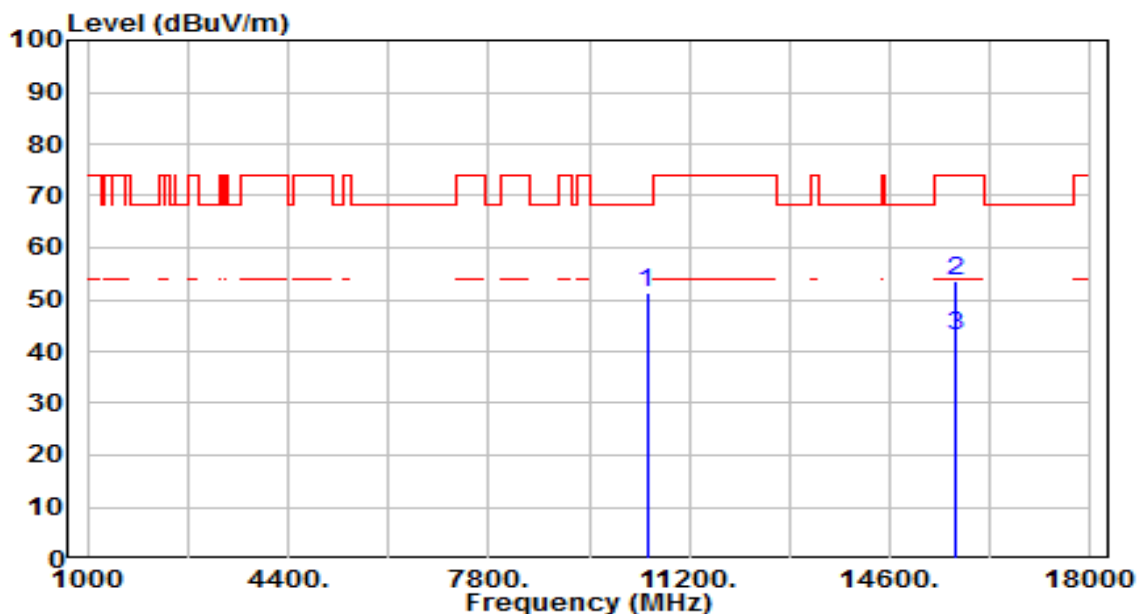


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	31.78	19.51	51.30	-16.90	68.20	100	156	Peak
2		15720.000	31.74	21.86	53.60	-20.40	74.00	100	115	Peak
3	*	15720.000	21.30	21.86	43.16	-10.84	54.00	100	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

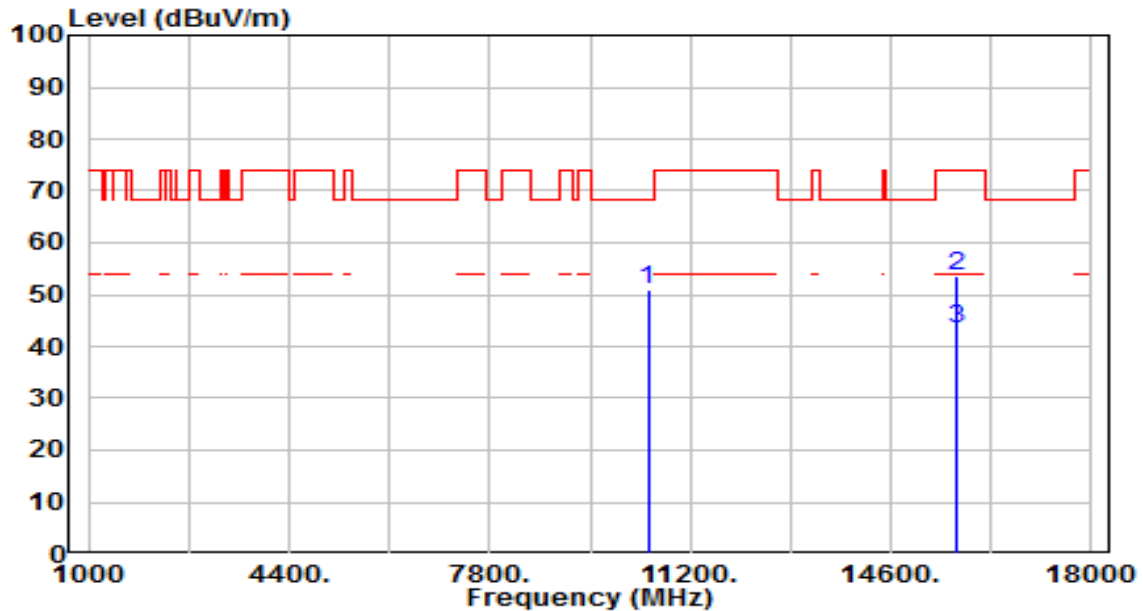


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	31.50	19.51	51.01	-17.19	68.20	100	232	Peak
2		15720.000	31.87	21.86	53.73	-20.27	74.00	100	86	Peak
3	*	15720.000	21.40	21.86	43.26	-10.74	54.00	100	86	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

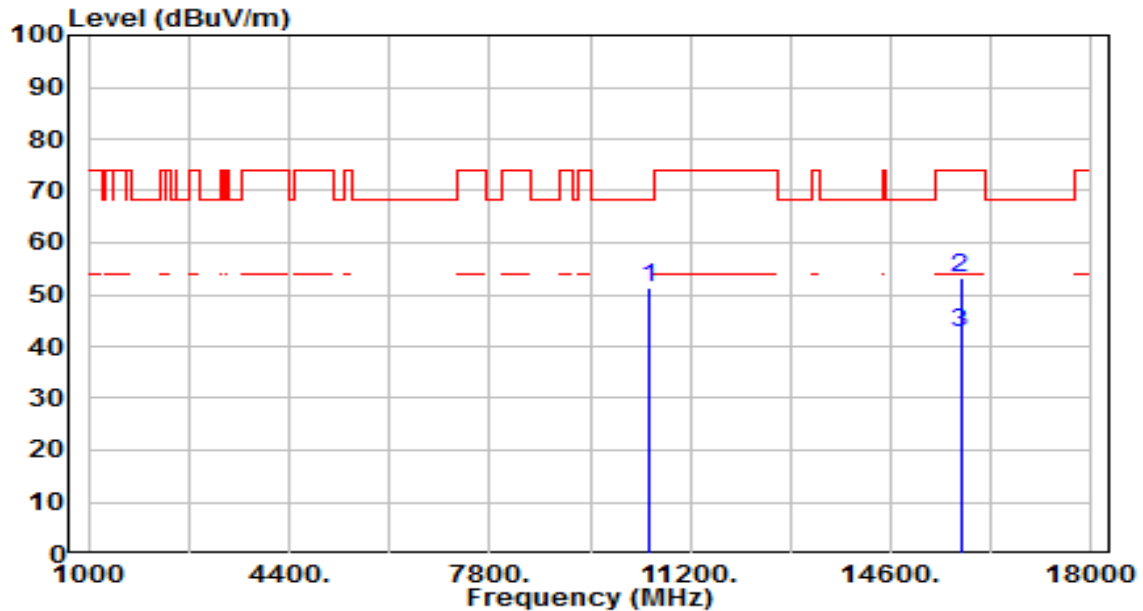


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	31.63	19.64	51.27	-16.93	68.20	100	75	Peak
2		15780.000	31.58	21.72	53.31	-20.69	74.00	100	127	Peak
3	*	15780.000	21.10	21.72	42.82	-11.18	54.00	100	127	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

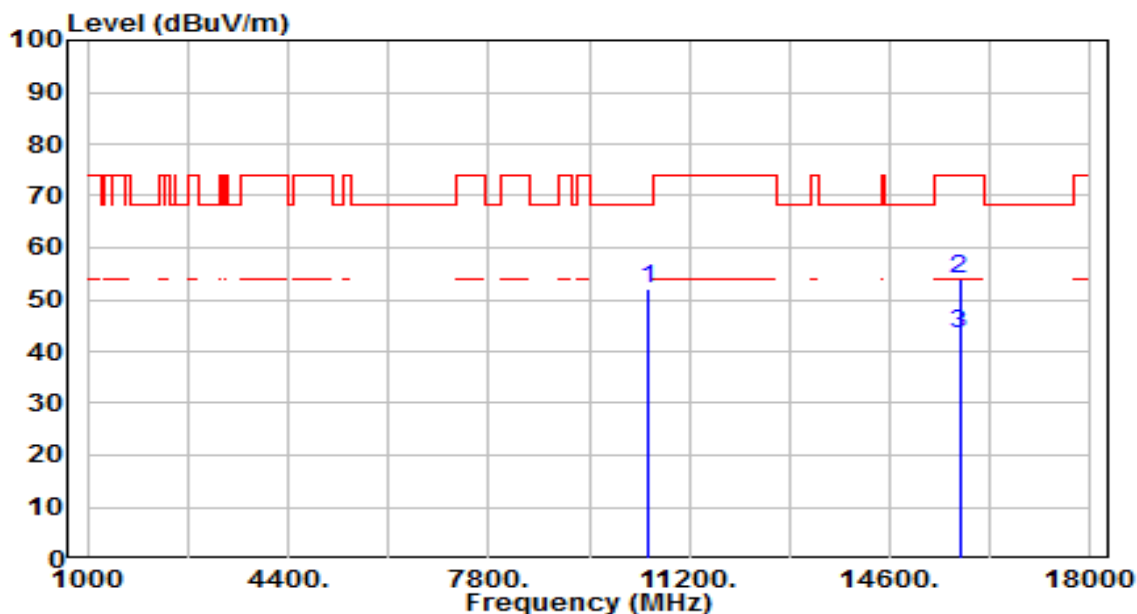


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	32.44	19.64	52.08	-16.12	68.20	100	103	Peak
2		15780.000	32.24	21.72	53.96	-20.04	74.00	100	25	Peak
3	*	15780.000	21.80	21.72	43.52	-10.48	54.00	100	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

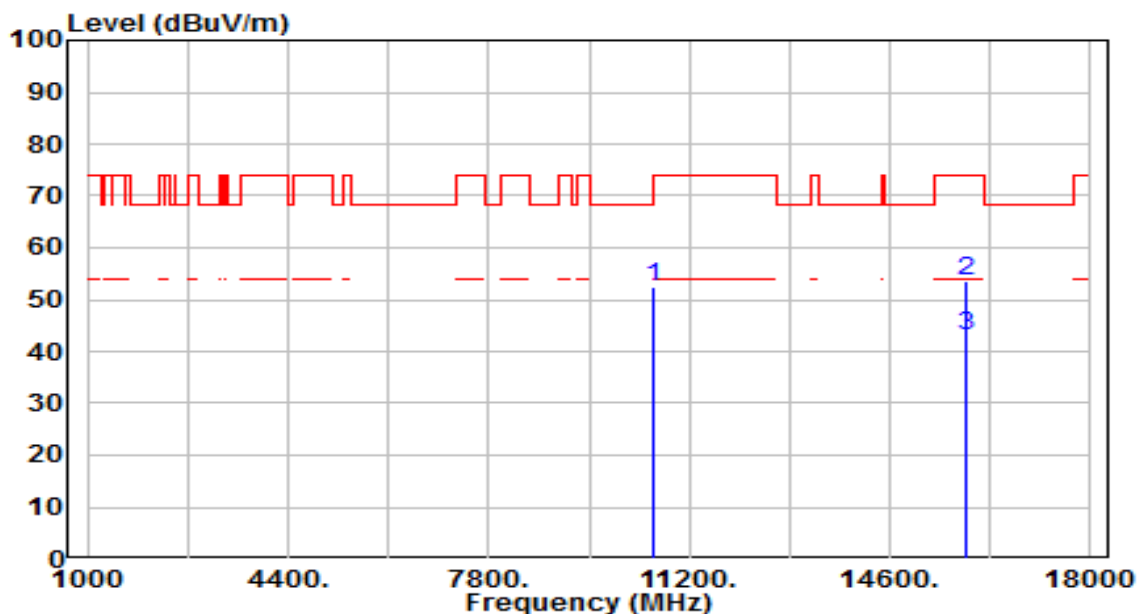


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	32.70	19.78	52.47	-15.73	68.20	100	354	Peak
2		15900.000	32.05	21.59	53.64	-20.36	74.00	100	54	Peak
3	*	15900.000	21.60	21.59	43.19	-10.81	54.00	100	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

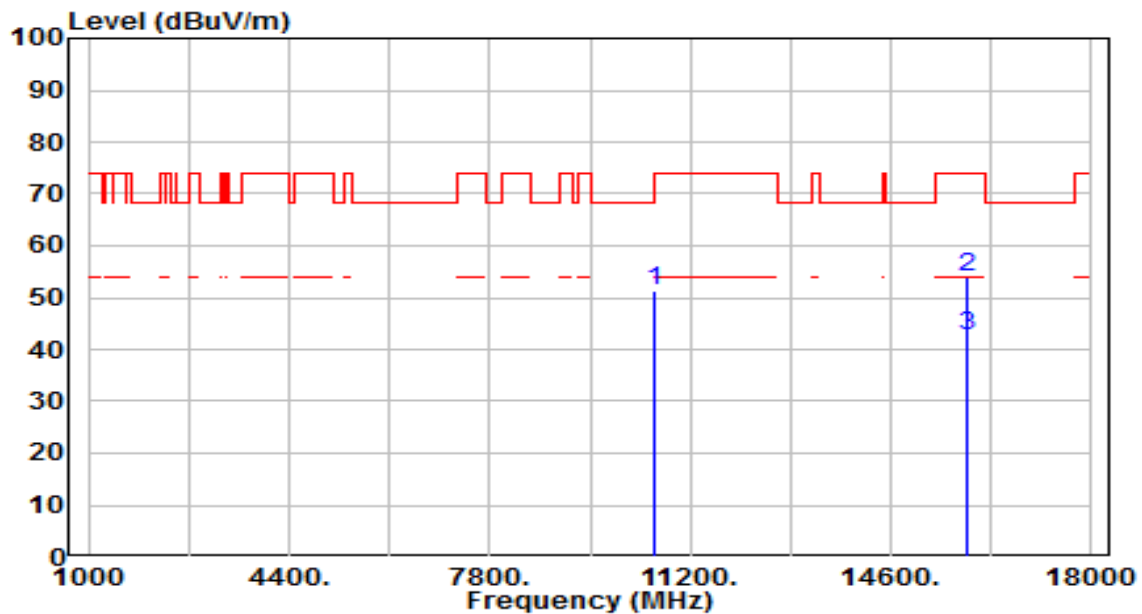


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	31.60	19.78	51.38	-16.82	68.20	100	62	Peak
2		15900.000	32.32	21.59	53.91	-20.09	74.00	100	119	Peak
3	*	15900.000	21.00	21.59	42.59	-11.41	54.00	100	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

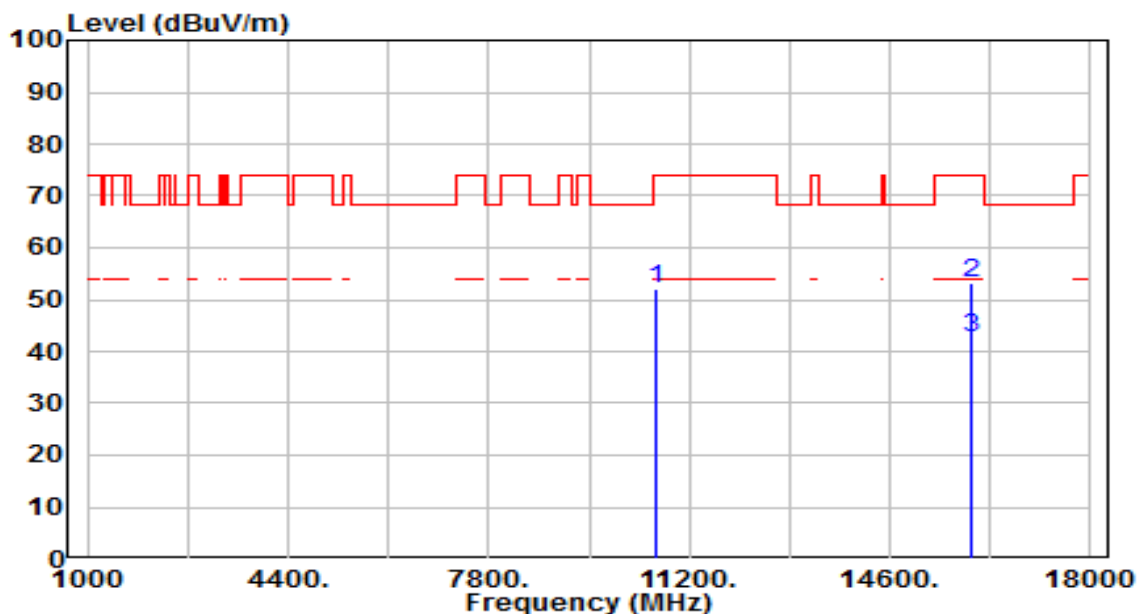


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	32.09	19.86	51.95	-22.05	74.00	100	168	Peak
2	*	15960.000	31.68	21.43	53.11	-20.89	74.00	100	64	Peak
3	*	15960.000	21.20	21.43	42.63	-11.37	54.00	100	64	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

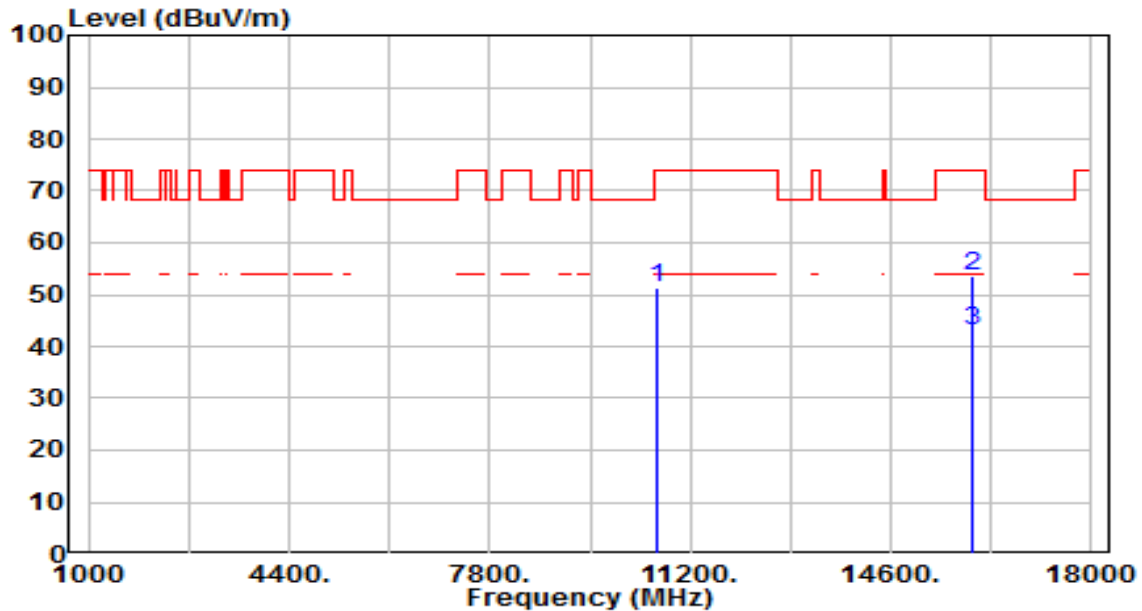


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	31.60	19.86	51.46	-22.54	74.00	100	177	Peak
2	*	15960.000	32.15	21.43	53.58	-20.42	74.00	100	322	Peak
3	*	15960.000	21.70	21.43	43.13	-10.87	54.00	100	322	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

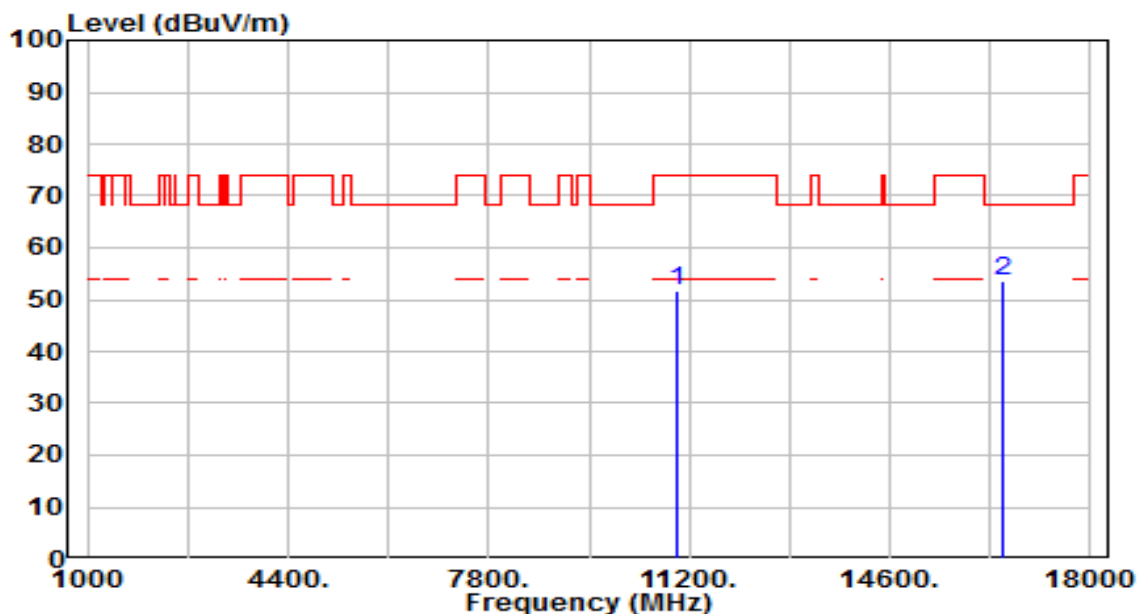


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	31.19	20.44	51.63	-22.37	74.00	100	90	Peak
2	* 16500.000	30.64	22.94	53.57	-14.63	68.20	100	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

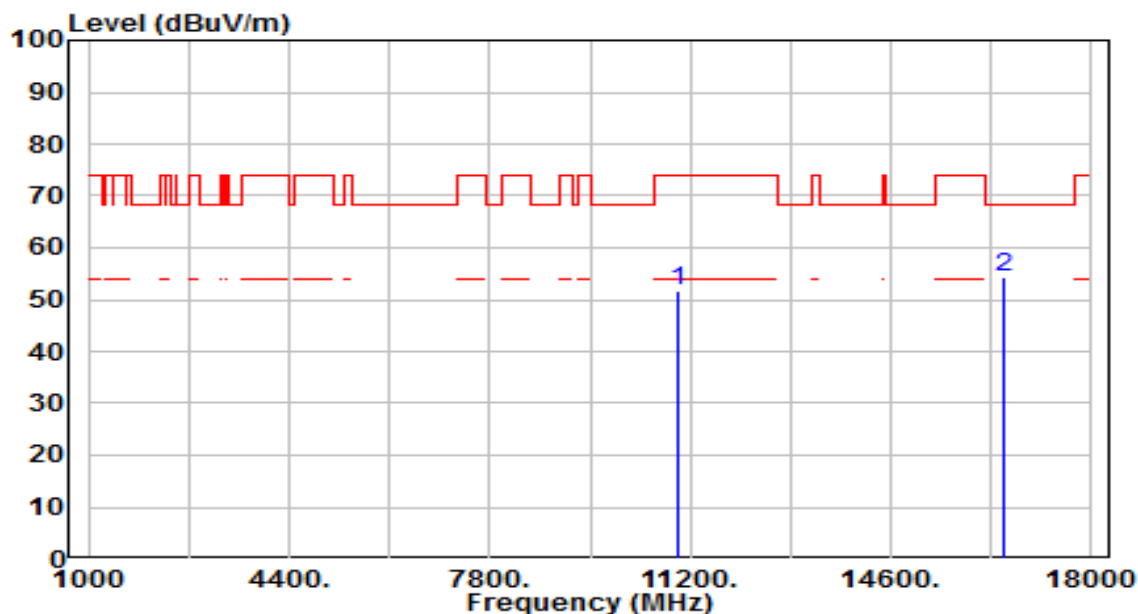


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	31.16	20.44	51.60	-22.40	74.00	100	291	Peak
2	* 16500.000	31.30	22.94	54.24	-13.96	68.20	100	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

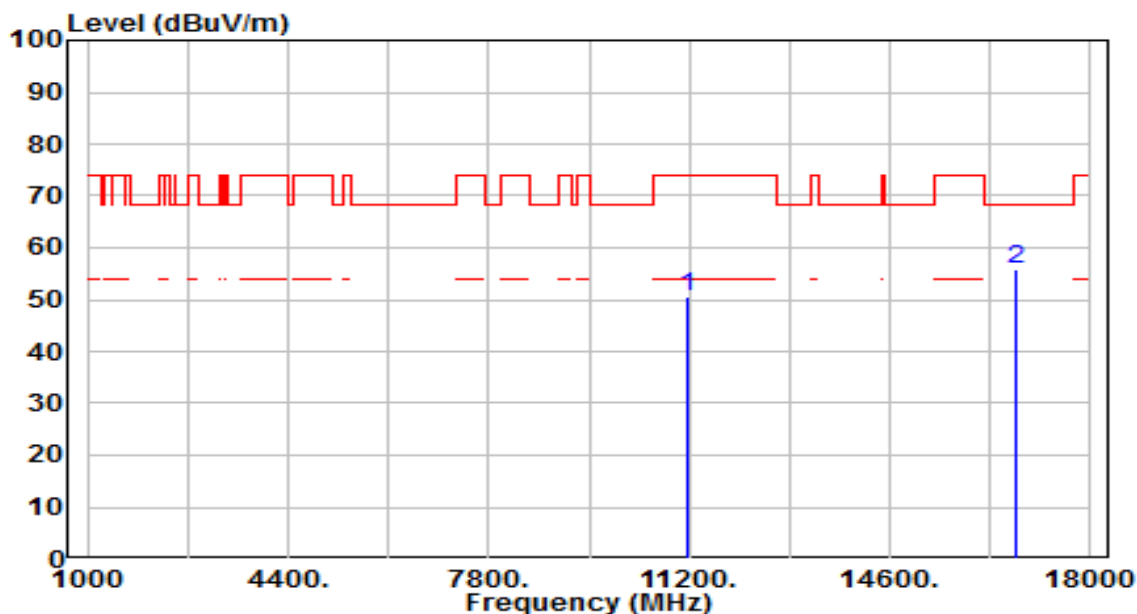


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	29.57	20.81	50.38	-23.62	74.00	100	351	Peak
2	* 16740.000	31.15	24.51	55.66	-12.54	68.20	100	284	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

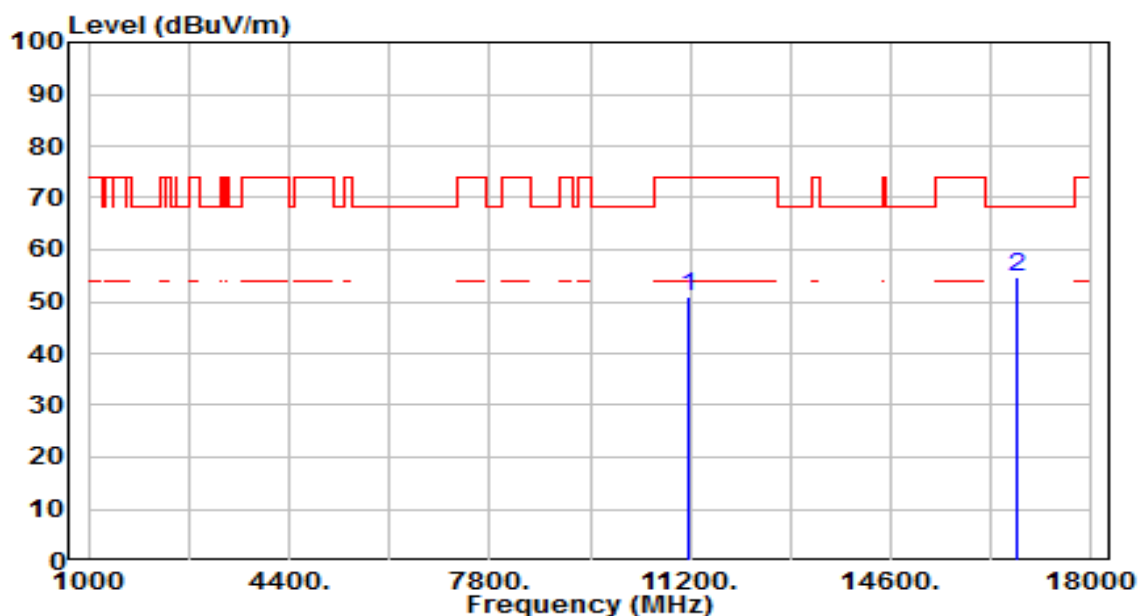


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	30.06	20.81	50.87	-23.13	74.00	100	63	Peak
2	* 16740.000	30.17	24.51	54.67	-13.53	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

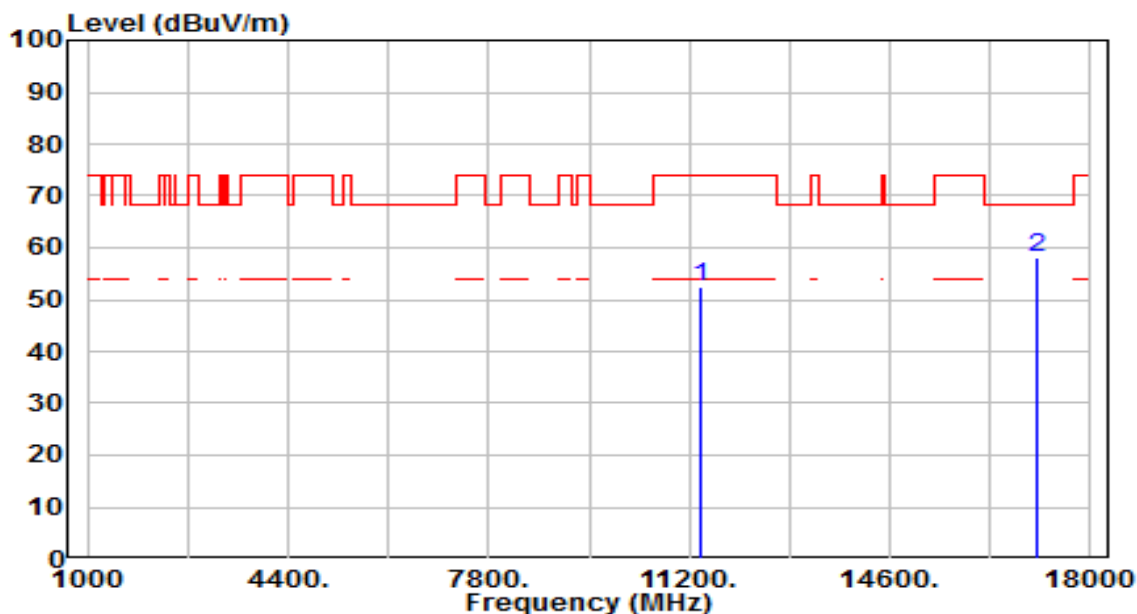


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	31.06	21.31	52.37	-21.63	74.00	100	148	Peak
2	*	17100.000	31.32	26.98	58.30	-9.90	68.20	100	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

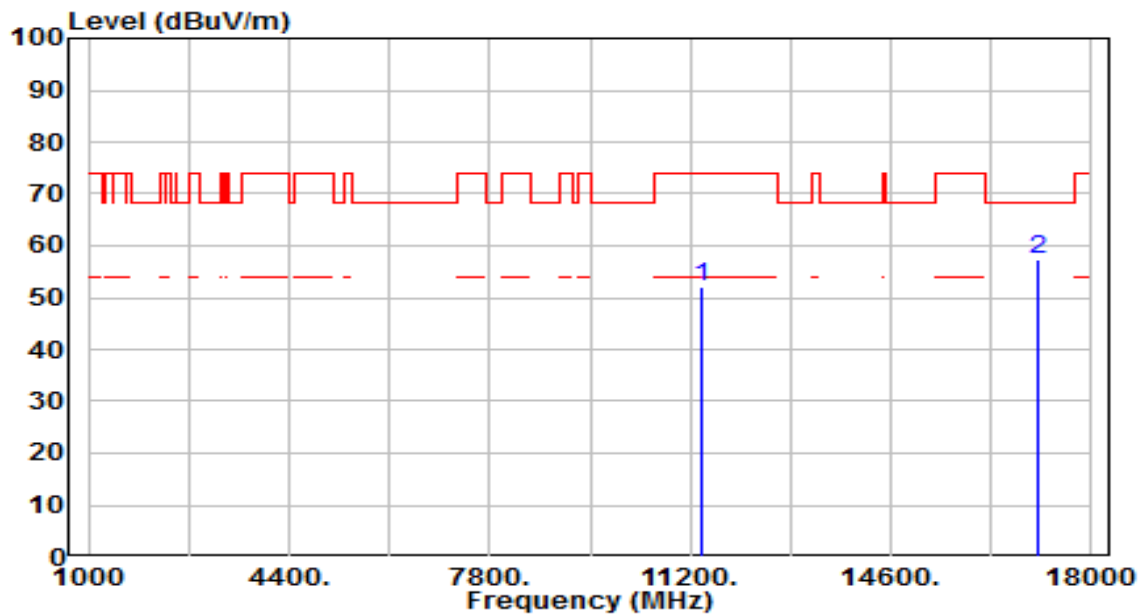


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	30.58	21.31	51.89	-22.11	74.00	100	306	Peak
2	* 17100.000	30.42	26.98	57.40	-10.80	68.20	100	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

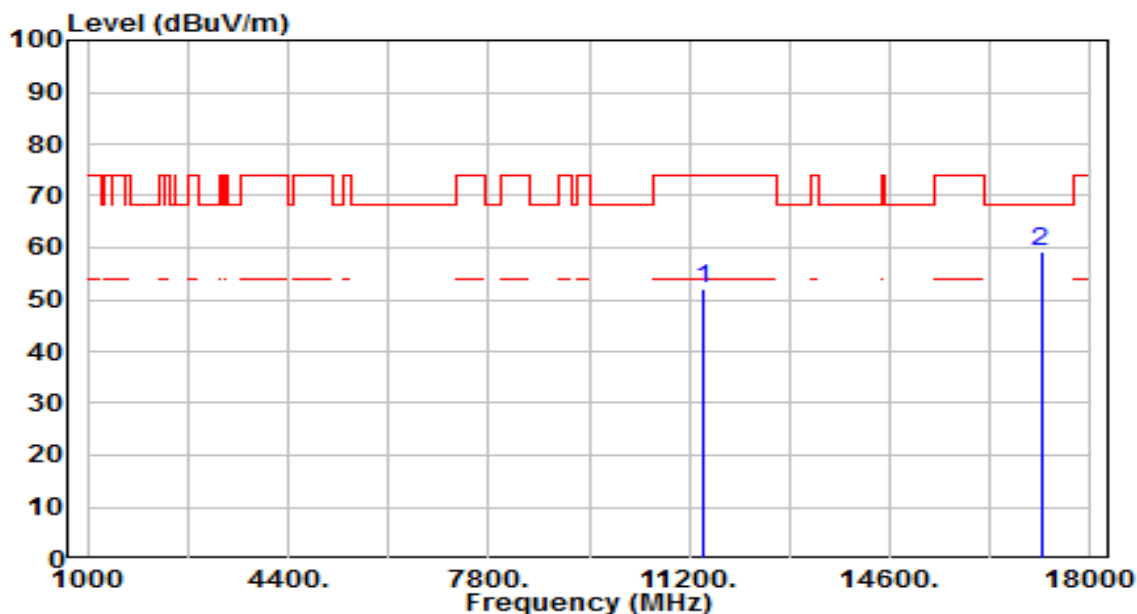


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	30.85	21.38	52.23	-21.77	74.00	100	105	Peak
2	* 17160.000	31.84	27.44	59.28	-8.92	68.20	100	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

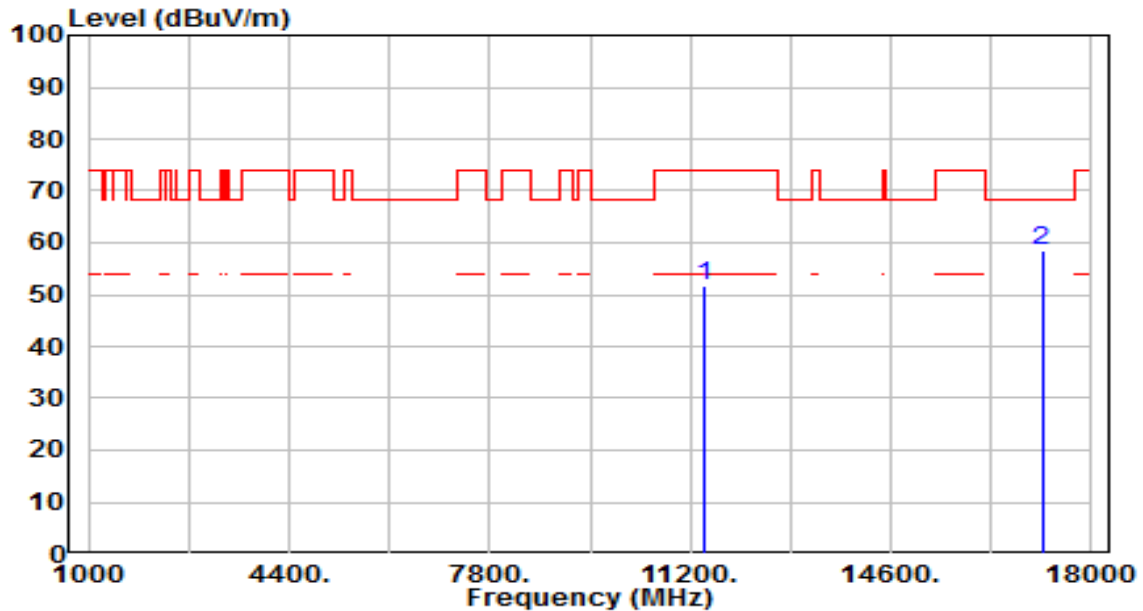


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	30.46	21.38	51.84	-22.16	74.00	100	187	Peak
2	* 17160.000	30.94	27.44	58.38	-9.82	68.20	100	77	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

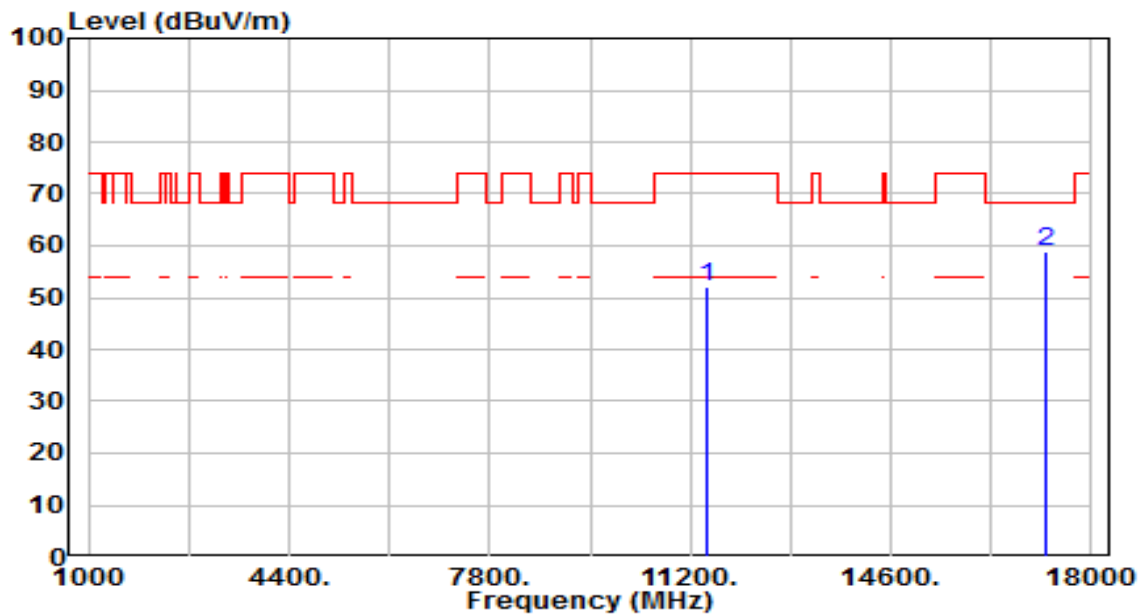


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	30.62	21.46	52.09	-21.91	74.00	100	38	Peak
2	* 17235.000	30.88	28.05	58.93	-9.27	68.20	100	298	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

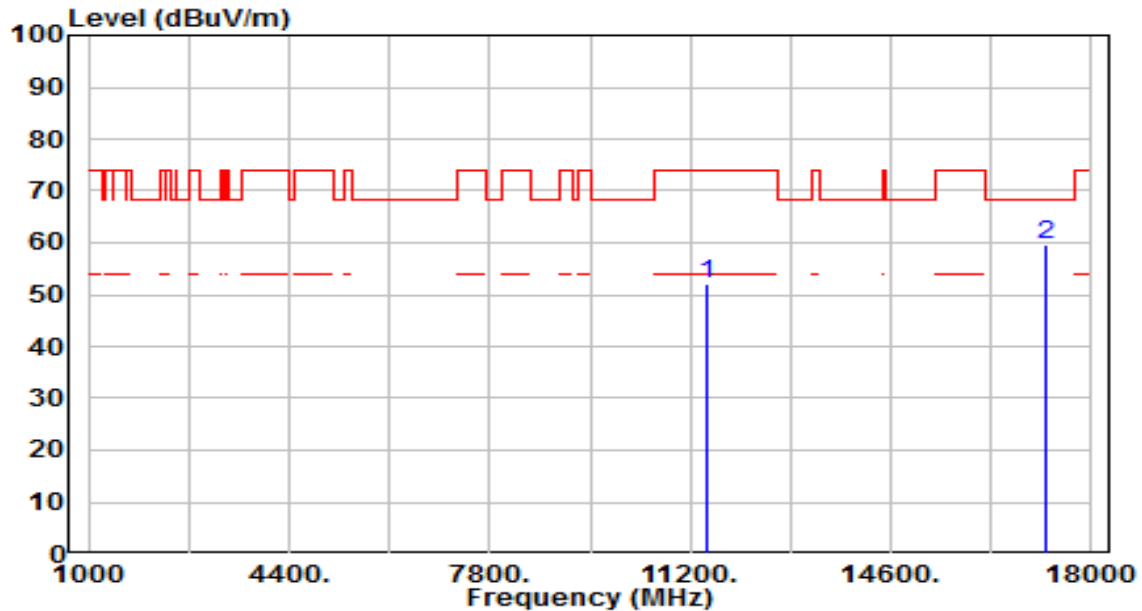


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	30.58	21.46	52.05	-21.95	74.00	100	46	Peak
2	* 17235.000	31.55	28.05	59.60	-8.60	68.20	100	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

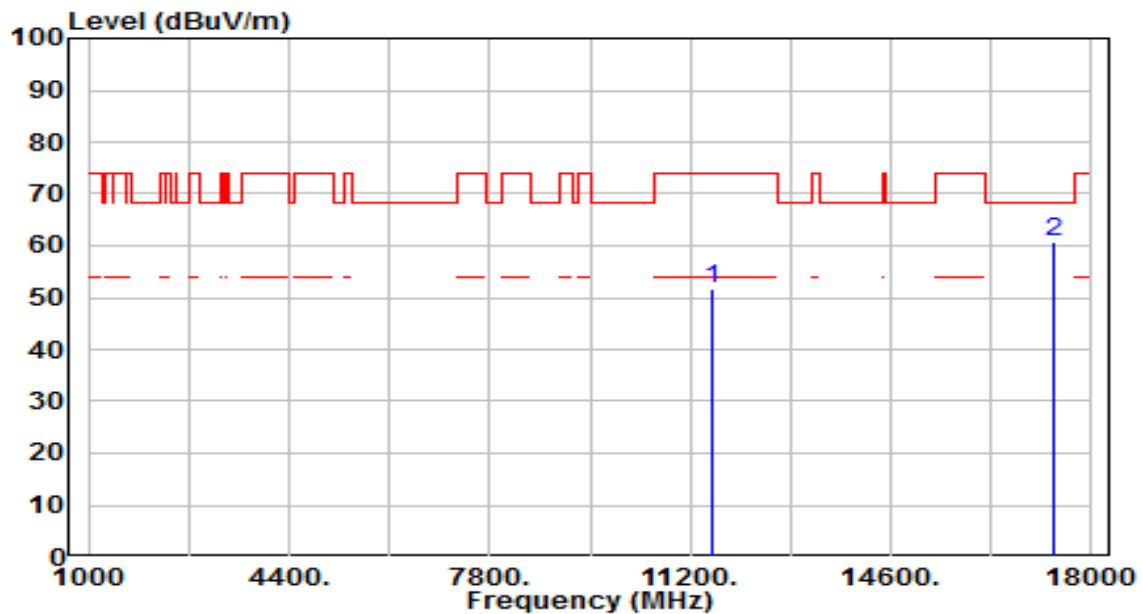


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	30.31	21.34	51.65	-22.35	74.00	100	107	Peak
2	* 17355.000	31.70	29.00	60.70	-7.50	68.20	100	221	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

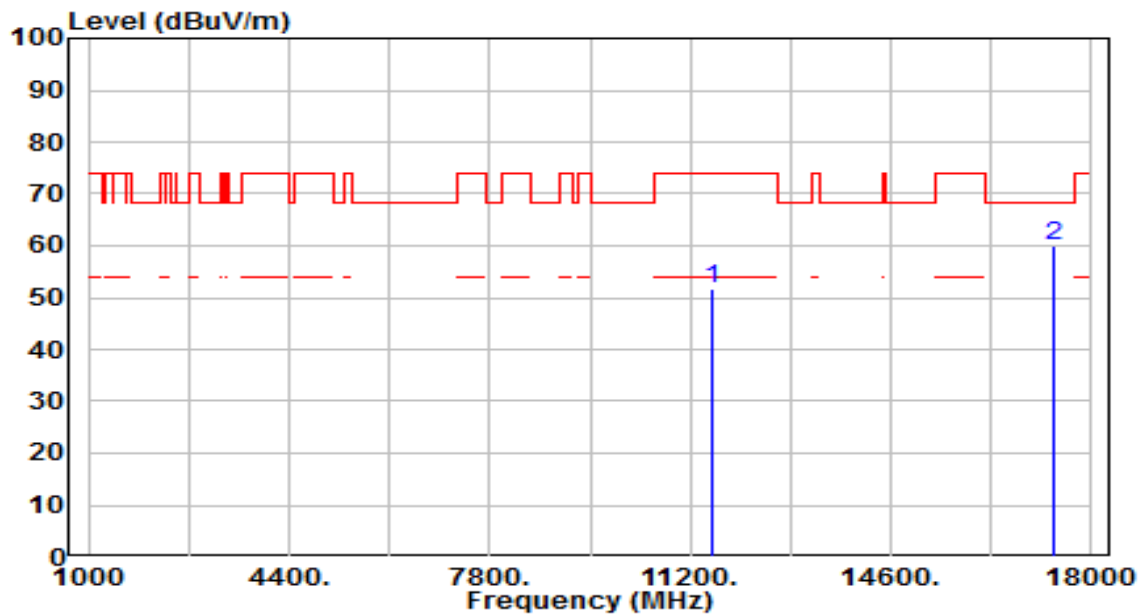


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	30.39	21.34	51.72	-22.28	74.00	100	192	Peak
2	*	17355.000	31.10	29.00	60.11	-8.09	68.20	100	87	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

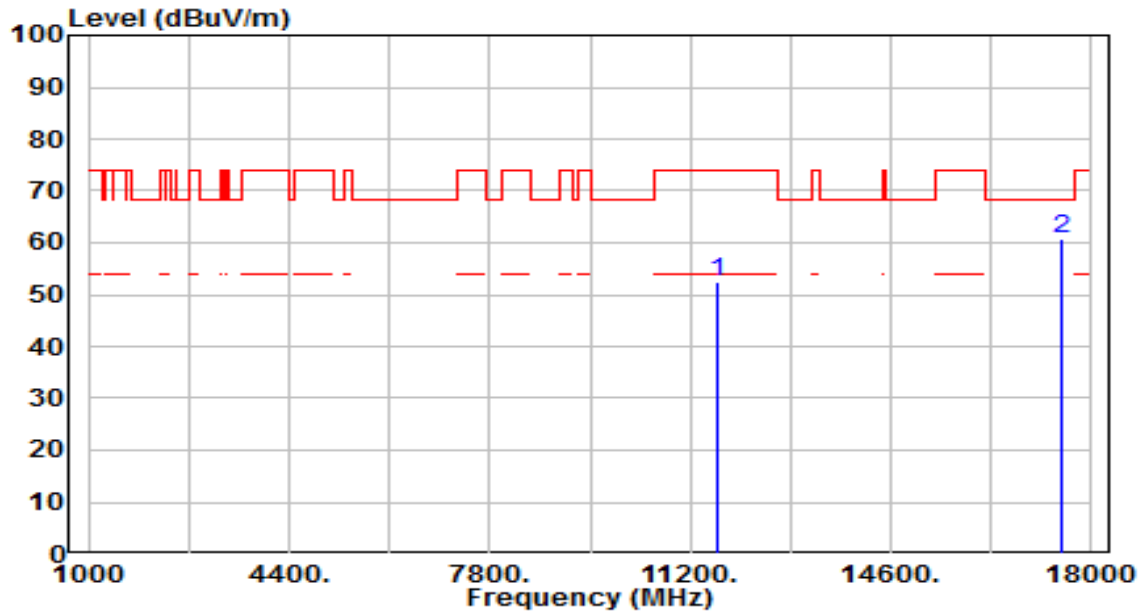


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	31.39	21.16	52.55	-21.45	74.00	100	346	Peak
2	*	17475.000	30.89	29.95	60.84	-7.36	68.20	100	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

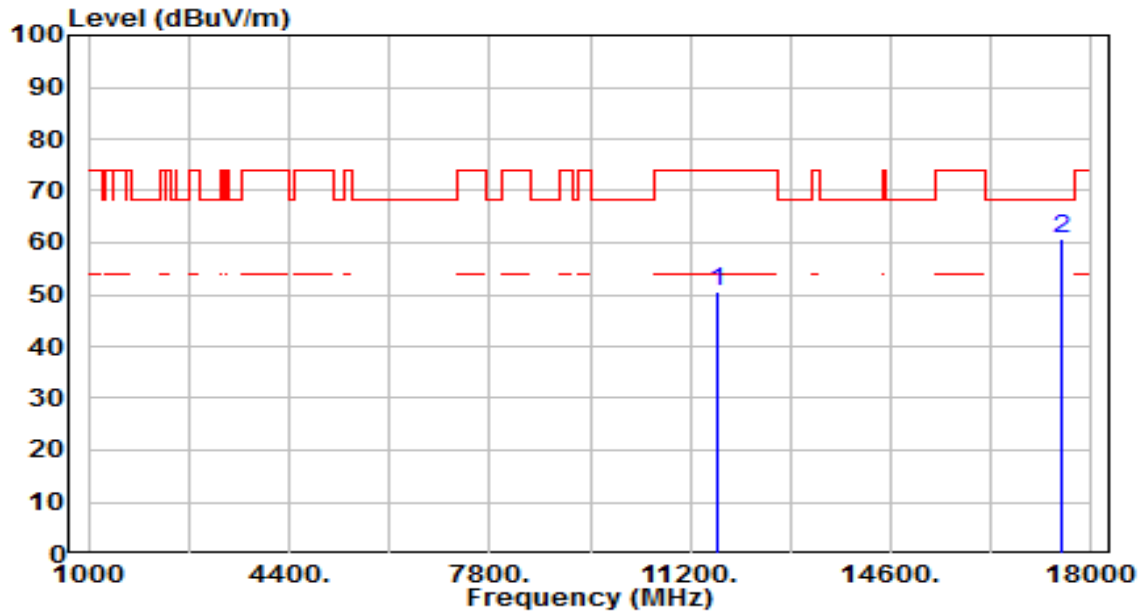


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	29.56	21.16	50.72	-23.28	74.00	100	26	Peak
2	* 17475.000	30.72	29.95	60.66	-7.54	68.20	100	198	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

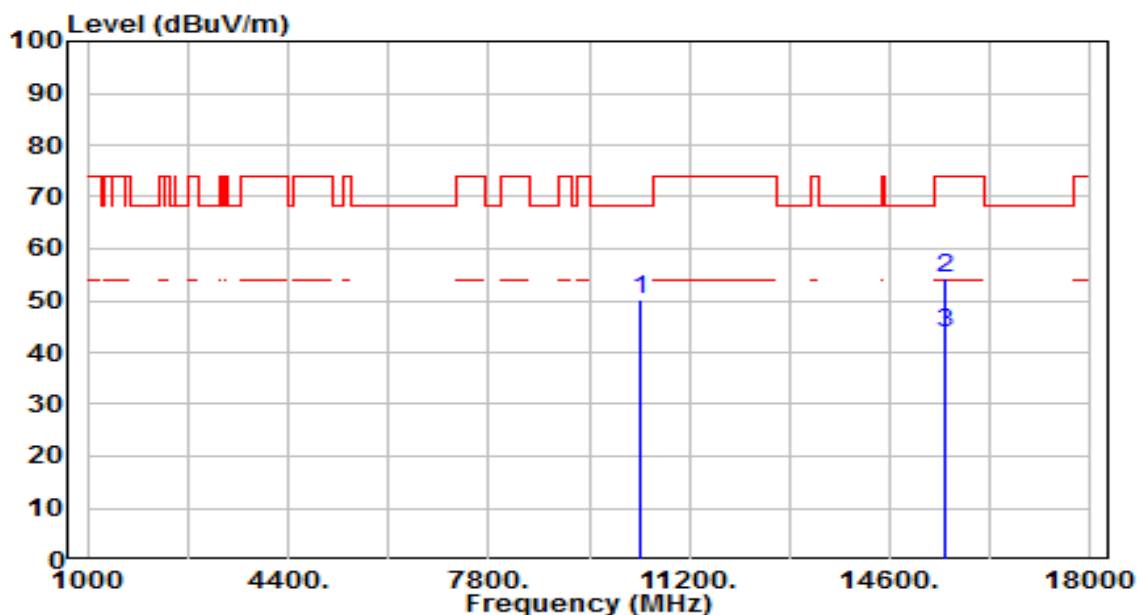


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	31.23	18.96	50.20	-18.00	68.20	100	253	Peak
2		15540.000	32.02	22.22	54.24	-19.76	74.00	100	311	Peak
3	*	15540.000	21.60	22.22	43.82	-10.18	54.00	100	311	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

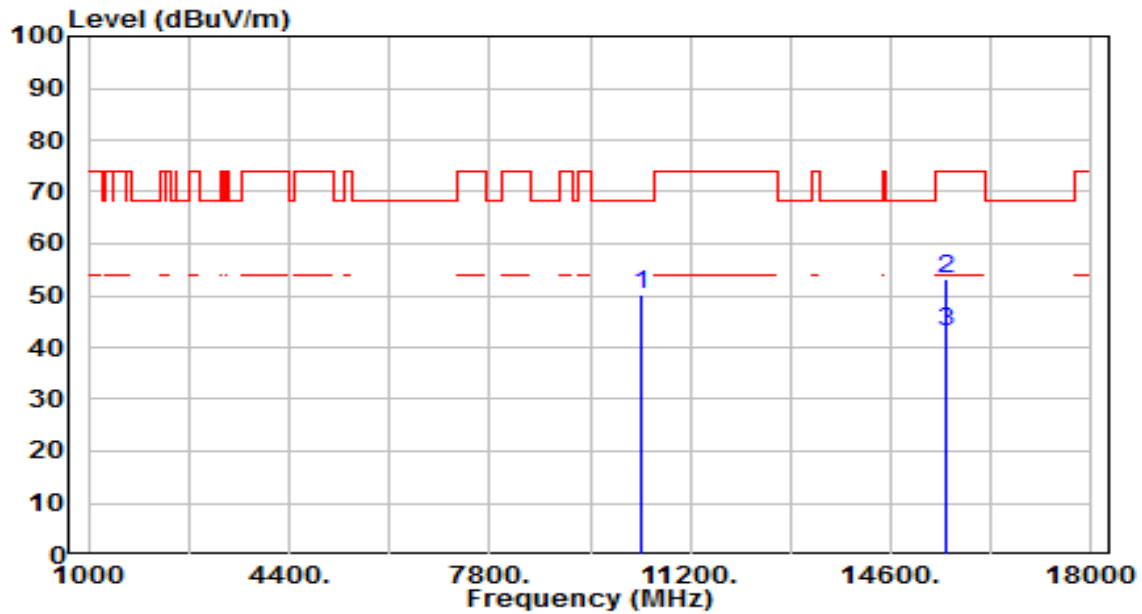


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	31.16	18.96	50.13	-18.07	68.20	100	326	Peak
2		15540.000	31.13	22.22	53.35	-20.65	74.00	100	145	Peak
3	*	15540.000	20.70	22.22	42.92	-11.08	54.00	100	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

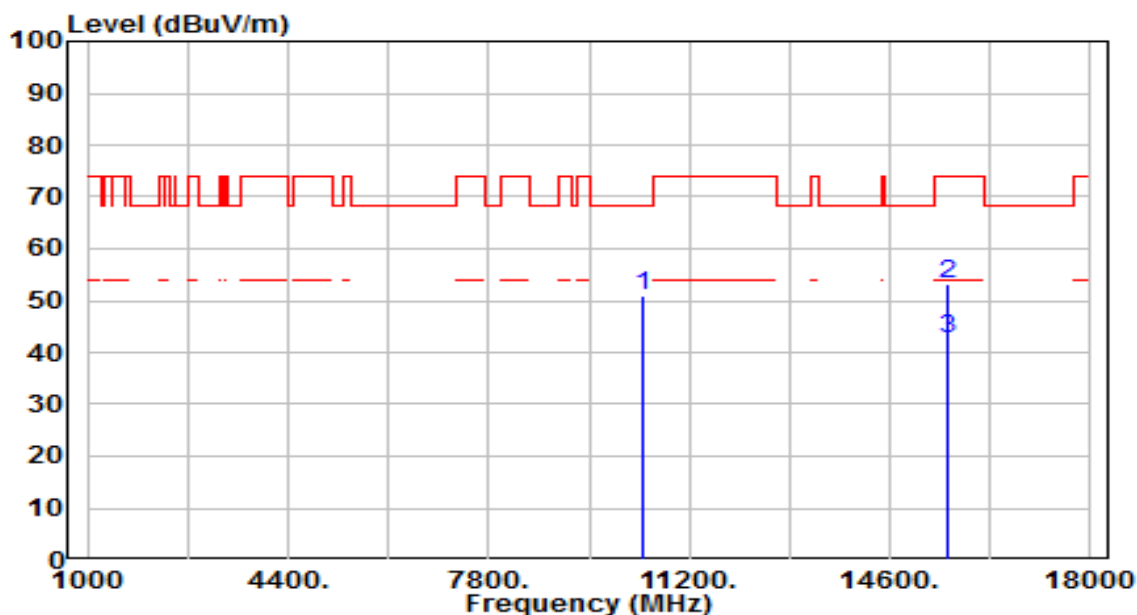


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	31.84	19.14	50.99	-17.21	68.20	100	44	Peak
2		15600.000	31.05	22.07	53.12	-20.88	74.00	100	70	Peak
3	*	15600.000	20.60	22.07	42.67	-11.33	54.00	100	70	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

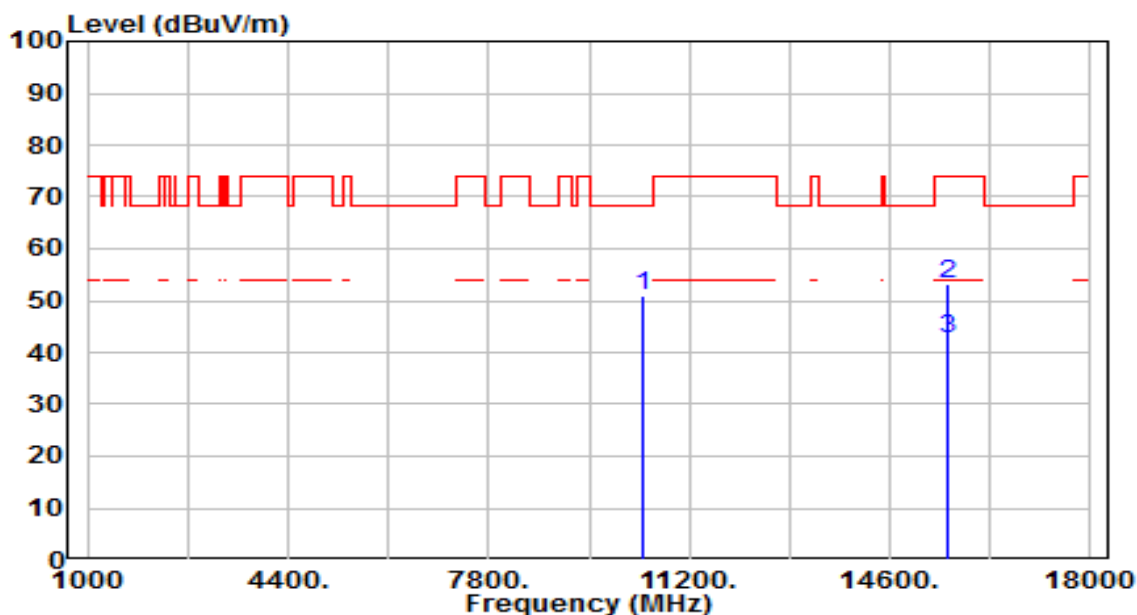


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	31.93	19.14	51.07	-17.13	68.20	100	197	Peak
2		15600.000	31.10	22.07	53.17	-20.83	74.00	100	322	Peak
3	*	15600.000	20.56	22.07	42.63	-11.37	54.00	100	322	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

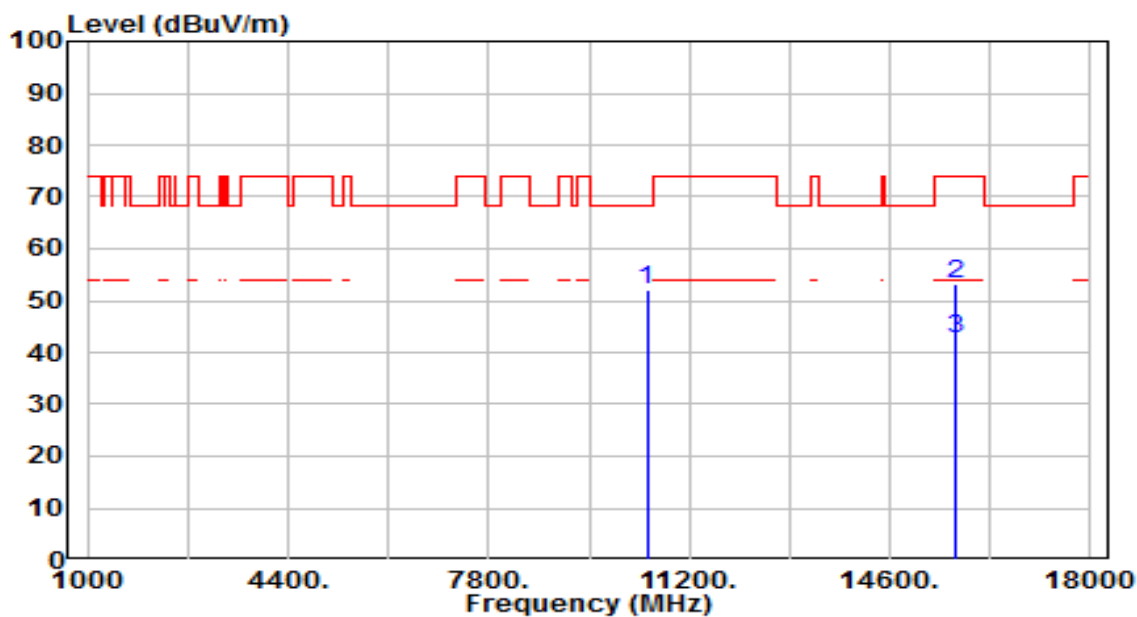


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	32.40	19.51	51.91	-16.29	68.20	100	215	Peak
2		15720.000	31.21	21.86	53.07	-20.93	74.00	100	168	Peak
3	*	15720.000	20.80	21.86	42.66	-11.34	54.00	100	168	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

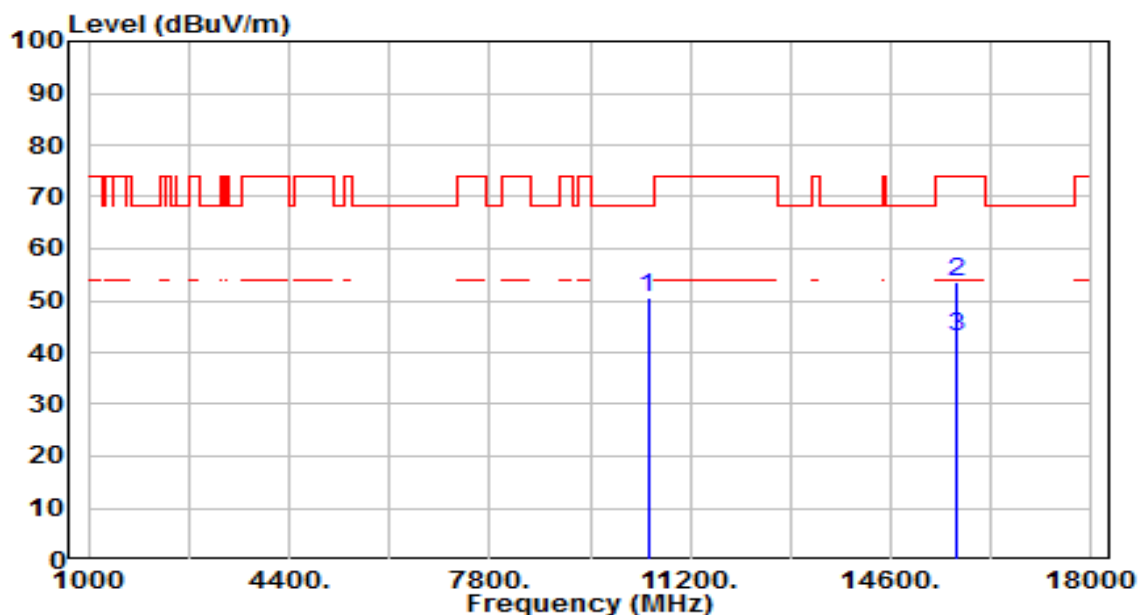


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	31.10	19.51	50.61	-17.59	68.20	100	353	Peak
2		15720.000	31.57	21.86	53.44	-20.56	74.00	100	20	Peak
3	*	15720.000	21.10	21.86	42.96	-11.04	54.00	100	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

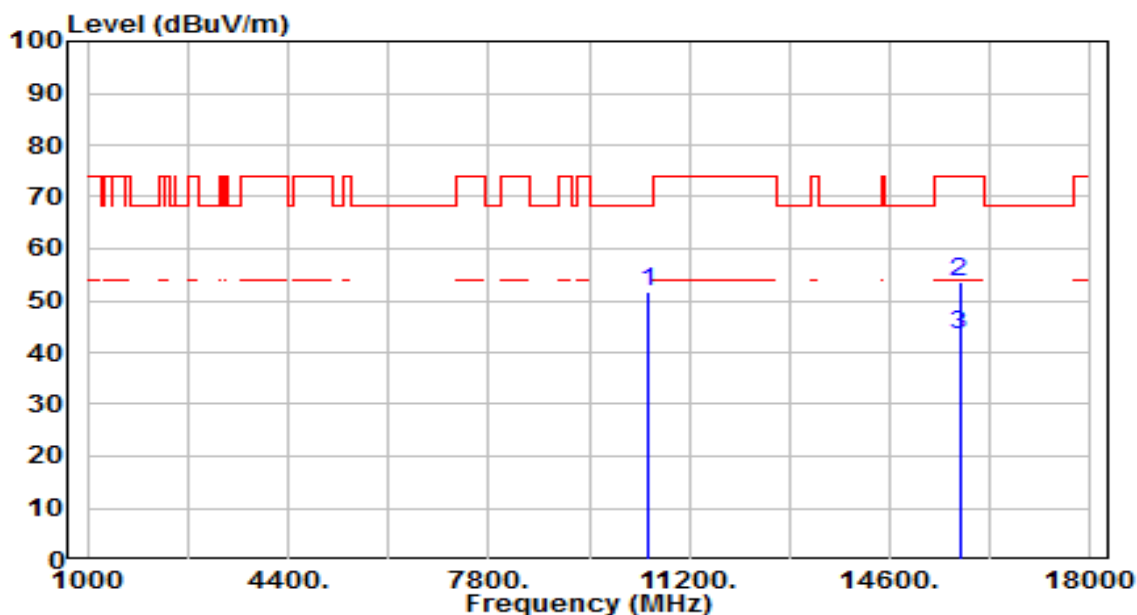


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	31.98	19.64	51.62	-16.58	68.20	100	327	Peak
2		15780.000	32.04	21.72	53.76	-20.24	74.00	100	281	Peak
3	*	15780.000	21.60	21.72	43.32	-10.68	54.00	100	281	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

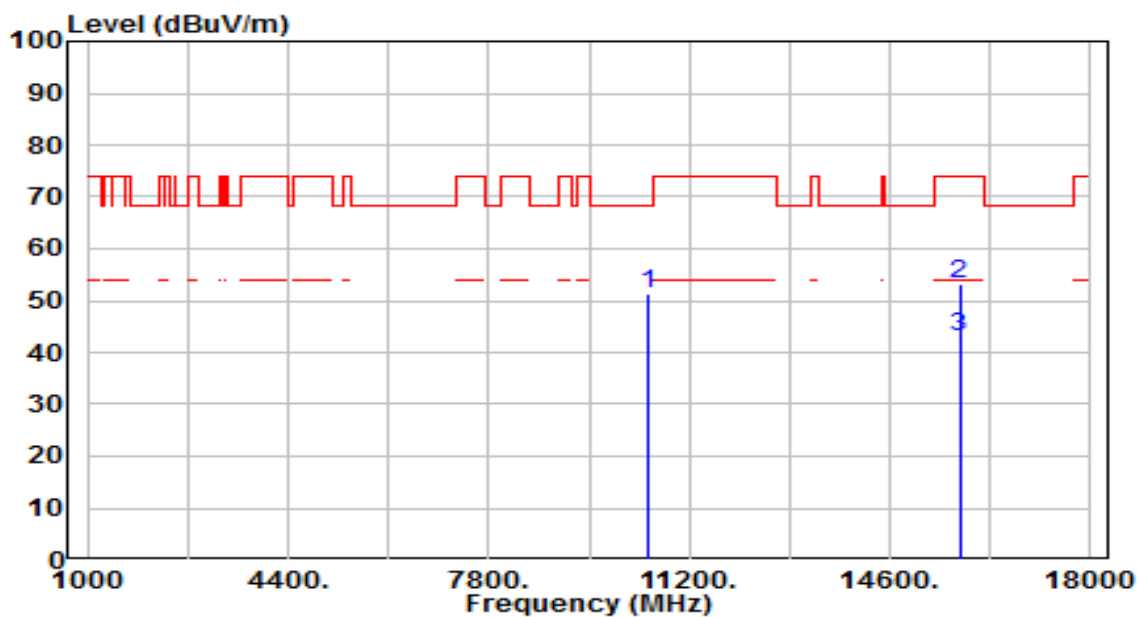


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	31.66	19.64	51.30	-16.90	68.20	100	12	Peak
2		15780.000	31.57	21.72	53.30	-20.70	74.00	100	280	Peak
3	*	15780.000	21.18	21.72	42.90	-11.10	54.00	100	280	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

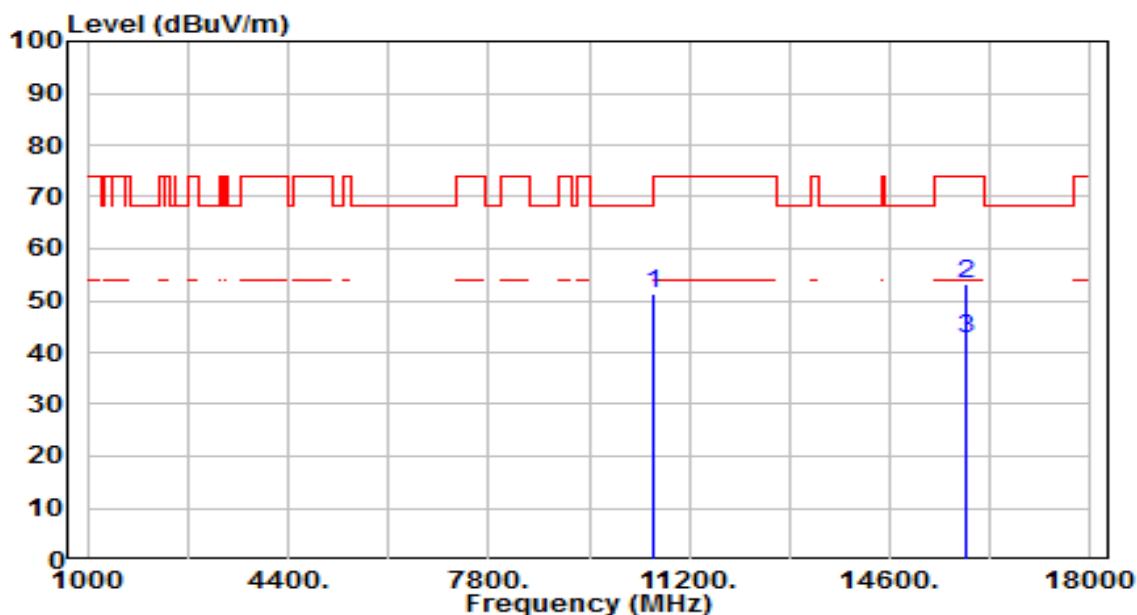


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	31.48	19.78	51.25	-16.95	68.20	100	240	Peak
2		15900.000	31.47	21.59	53.05	-20.95	74.00	100	64	Peak
3	*	15900.000	21.00	21.59	42.59	-11.41	54.00	100	64	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

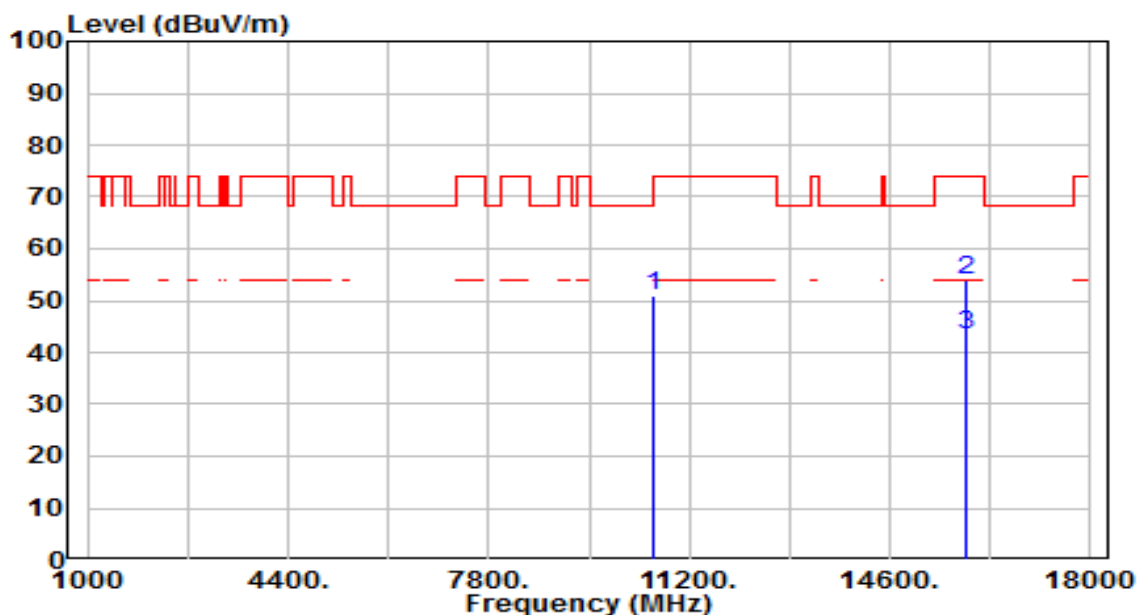


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	31.04	19.78	50.82	-17.38	68.20	100	280	Peak
2		15900.000	32.29	21.59	53.88	-20.12	74.00	100	306	Peak
3	*	15900.000	21.80	21.59	43.39	-10.61	54.00	100	306	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

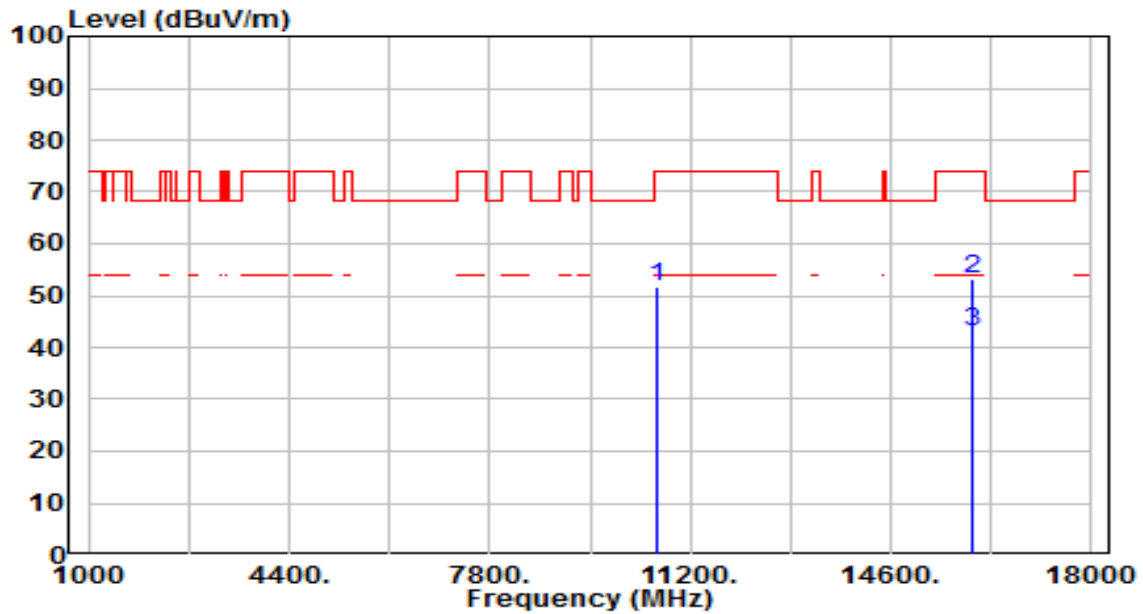


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	31.92	19.86	51.78	-22.22	74.00	100	158	Peak
2	*	15960.000	31.96	21.43	53.39	-20.61	74.00	100	303	Peak
3	*	15960.000	21.50	21.43	42.93	-11.07	54.00	100	303	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

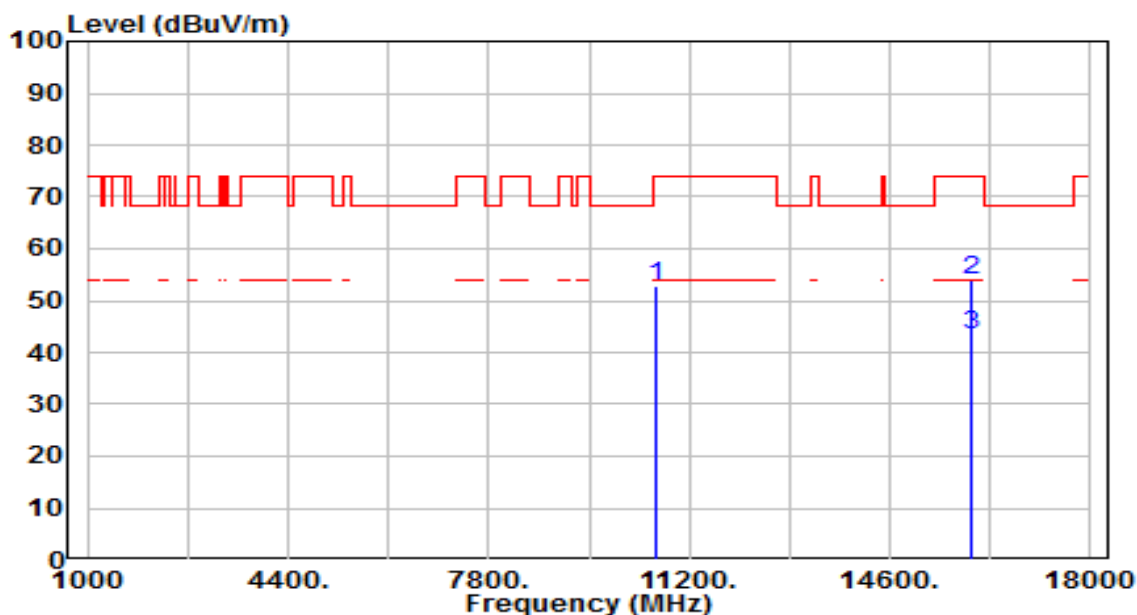


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	32.86	19.86	52.72	-21.28	74.00	100	317	Peak
2	*	15960.000	32.36	21.43	53.79	-20.21	74.00	100	103	Peak
3	*	15960.000	22.00	21.43	43.43	-10.57	54.00	100	103	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

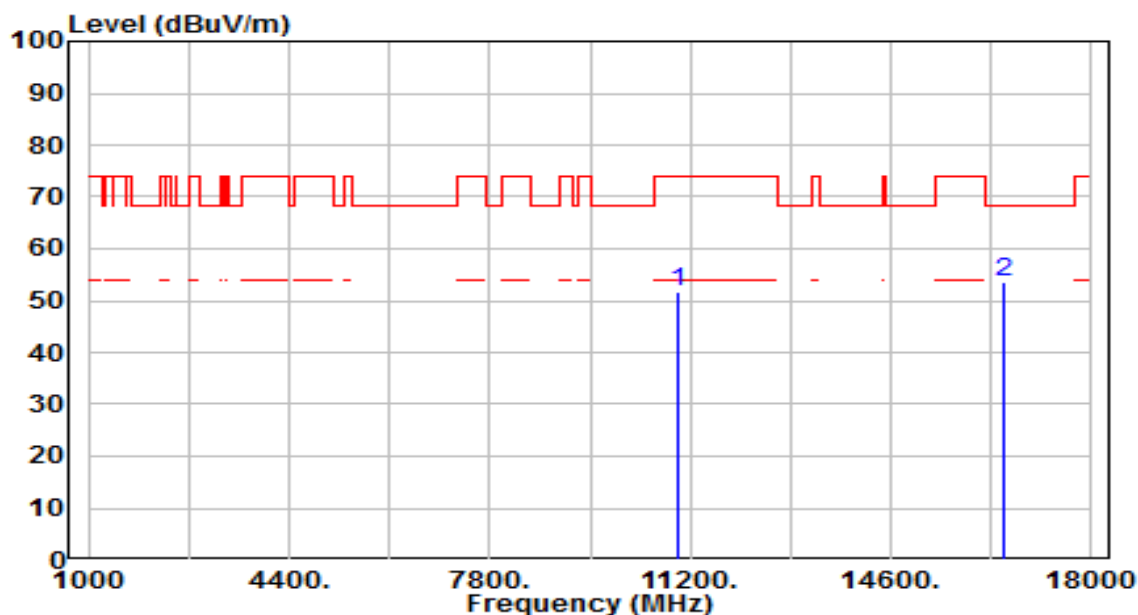


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	31.18	20.44	51.62	-22.38	74.00	100	158	Peak
2	*	16500.000	30.56	22.94	53.50	-14.70	68.20	100	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

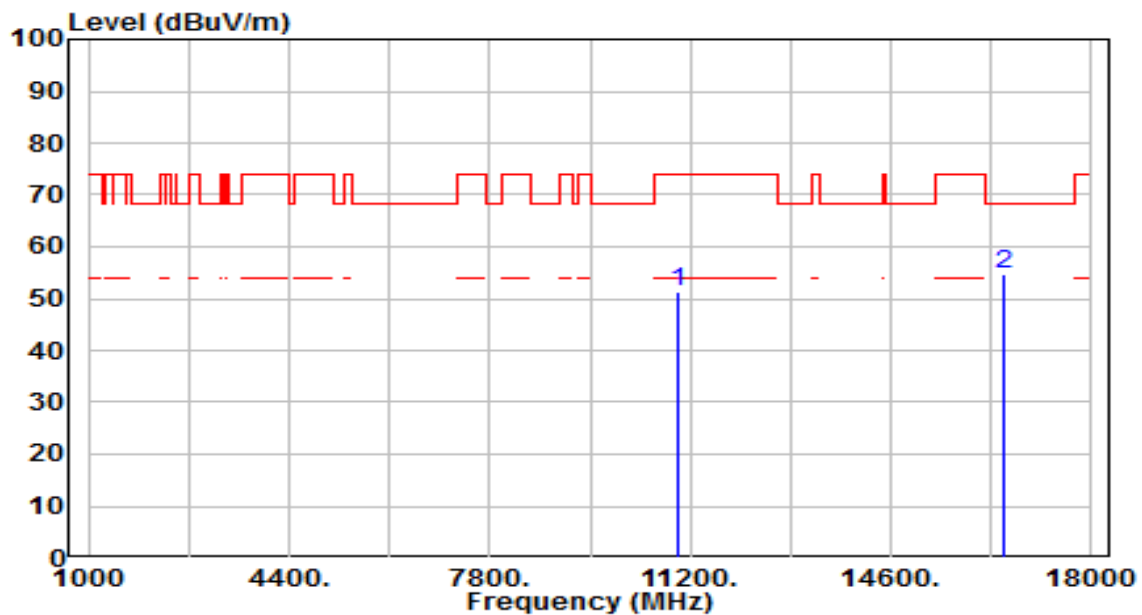


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	30.71	20.44	51.15	-22.85	74.00	100	42	Peak
2	*	16500.000	31.68	22.94	54.61	-13.59	68.20	100	26	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

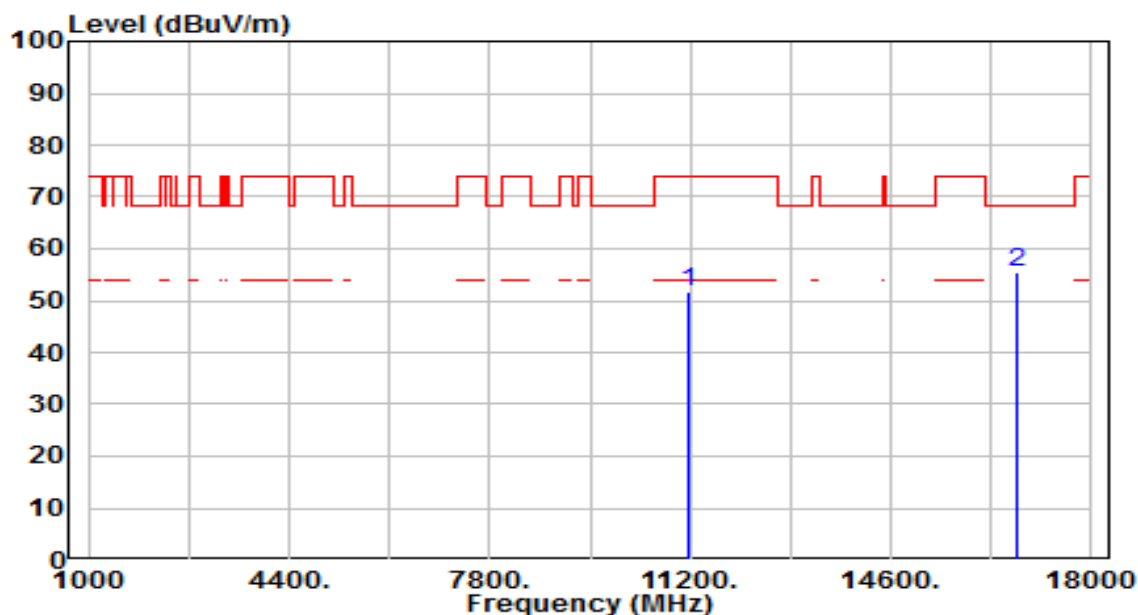


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	30.82	20.81	51.63	-22.37	74.00	100	272	Peak
2	*	16740.000	30.83	24.51	55.34	-12.86	68.20	100	163	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

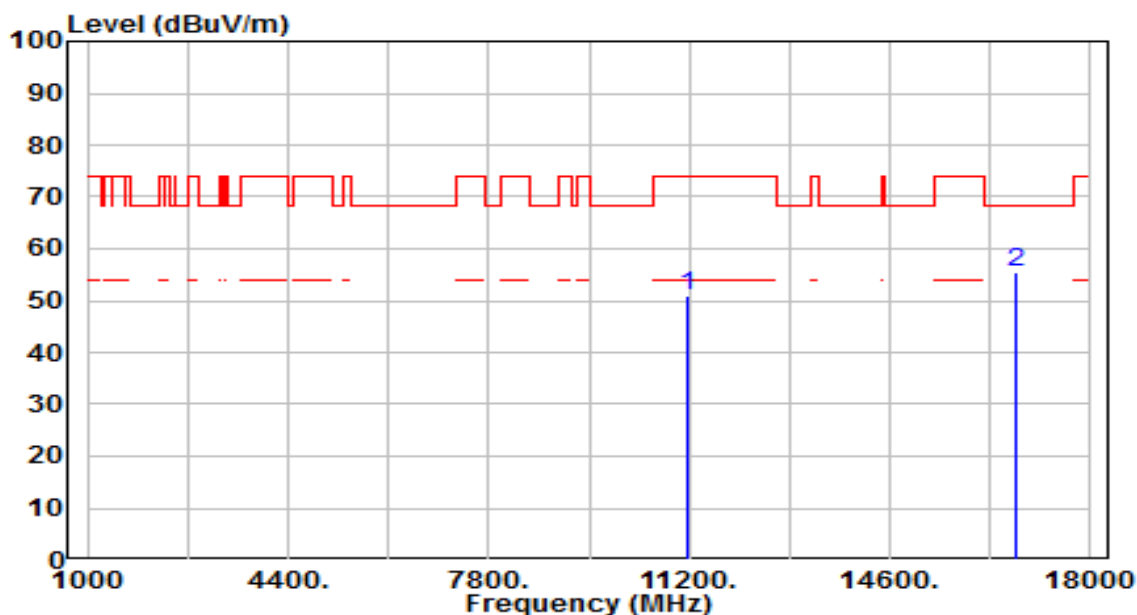


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	30.17	20.81	50.98	-23.02	74.00	100	321	Peak
2	*	16740.000	30.92	24.51	55.43	-12.77	68.20	100	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

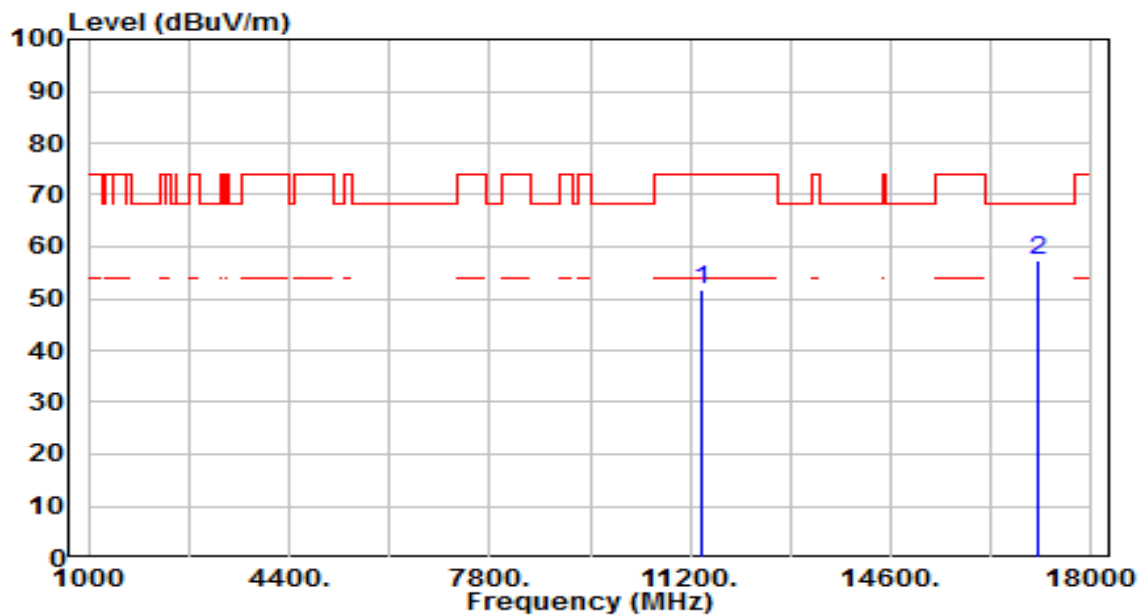


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	30.51	21.31	51.82	-22.18	74.00	100	339	Peak
2	*	17100.000	30.54	26.98	57.52	-10.68	68.20	100	101	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

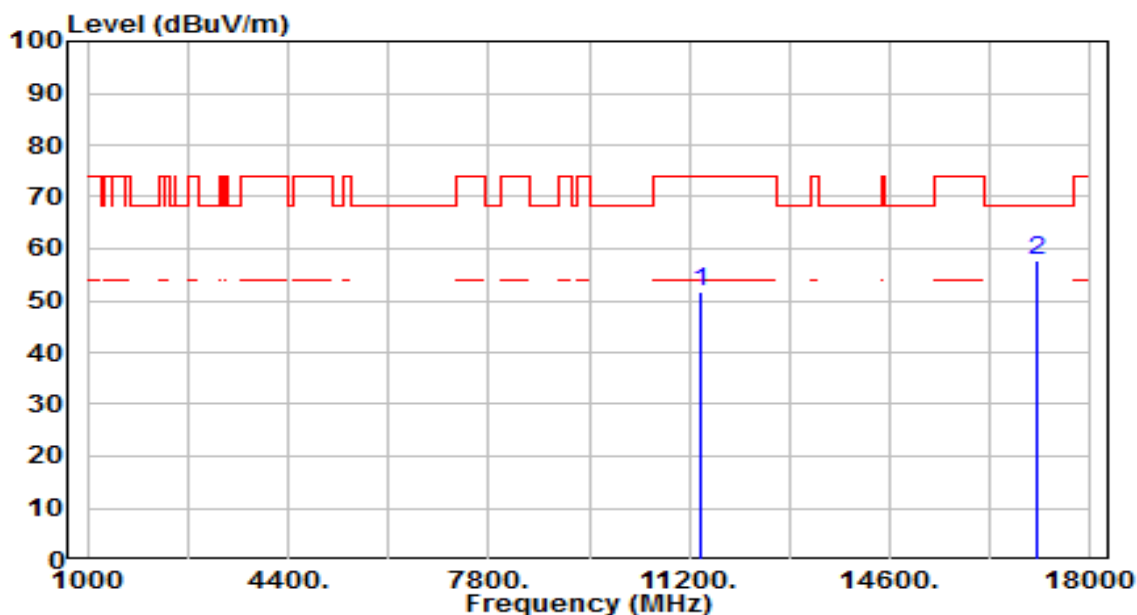


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	30.42	21.31	51.73	-22.27	74.00	100	125	Peak
2	*	17100.000	30.68	26.98	57.66	-10.54	68.20	100	301	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

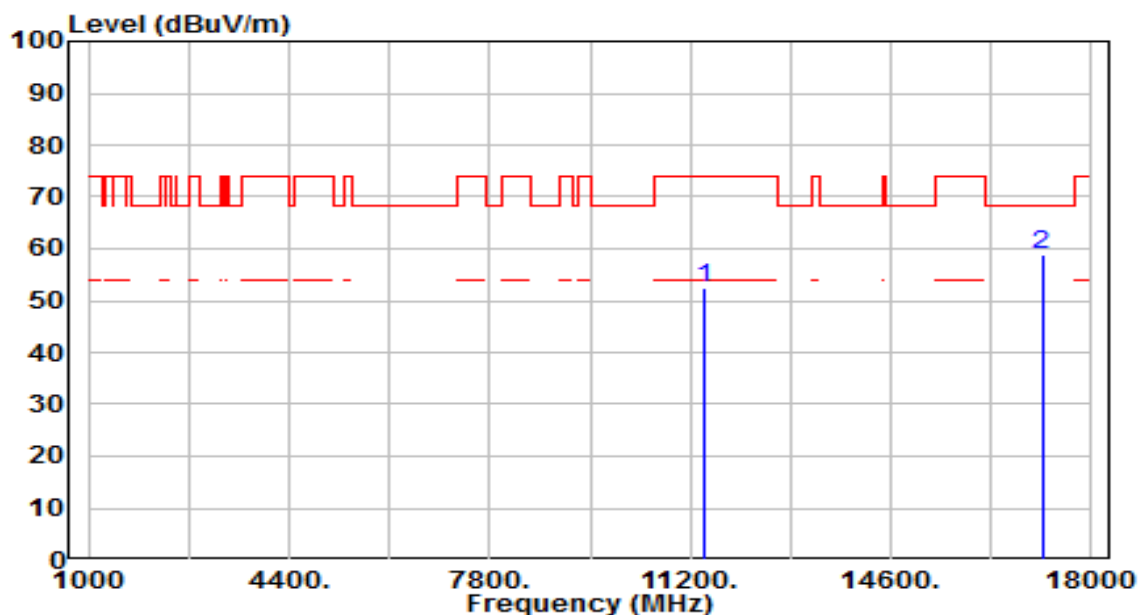


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	31.15	21.38	52.53	-21.47	74.00	100	298	Peak
2	*	17160.000	31.48	27.44	58.92	-9.28	68.20	100	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

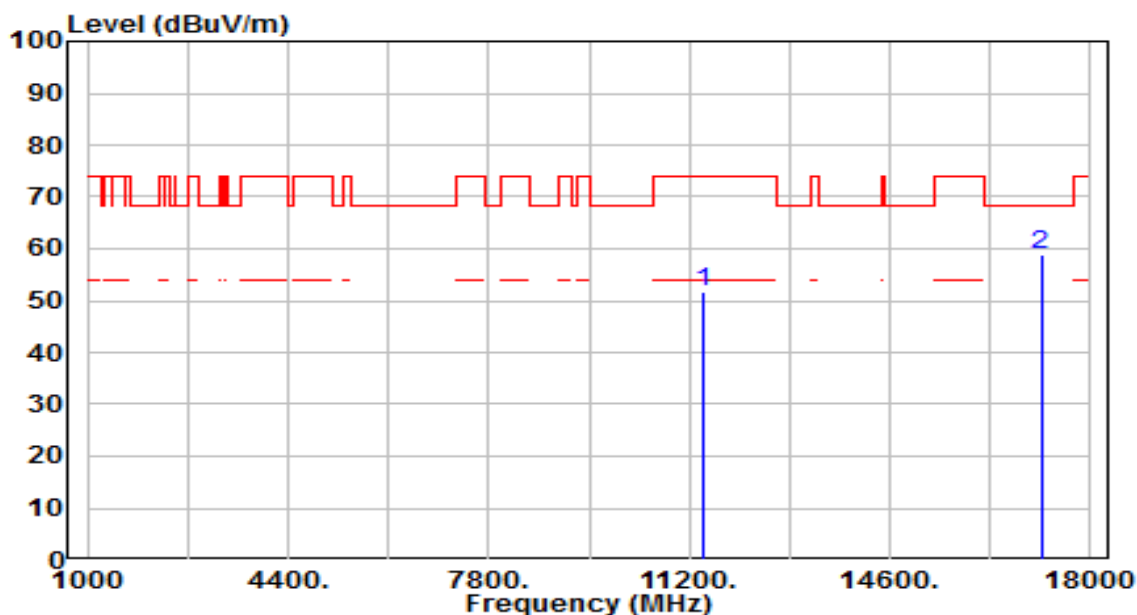


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	30.35	21.38	51.73	-22.27	74.00	100	321	Peak
2	*	17160.000	31.33	27.44	58.77	-9.43	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

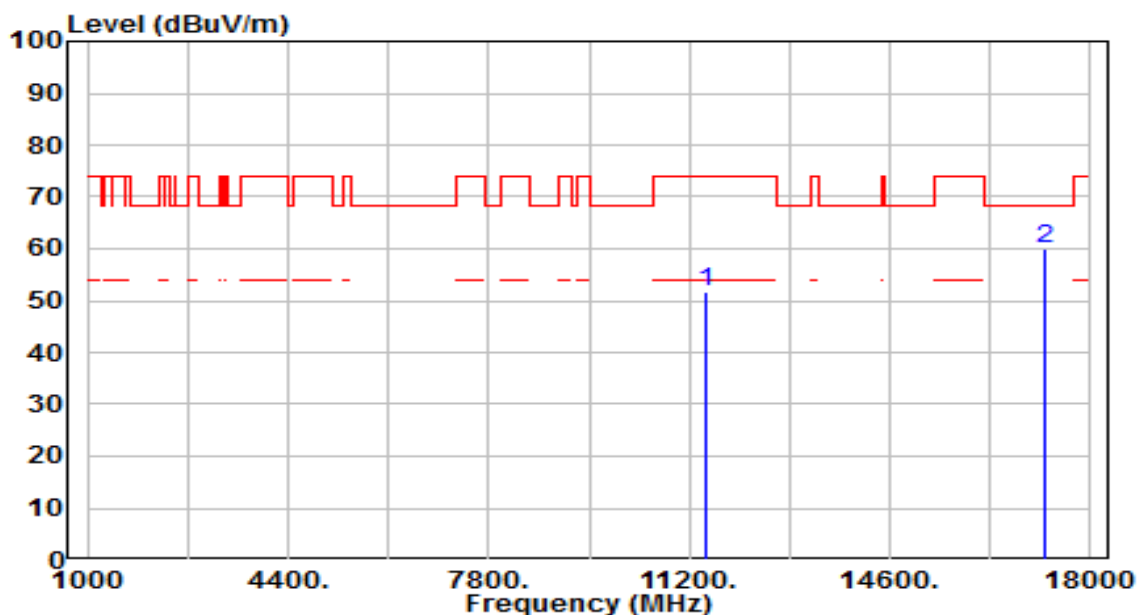


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	30.28	21.46	51.74	-22.26	74.00	100	309	Peak
2	*	17235.000	31.77	28.05	59.82	-8.38	68.20	100	314	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

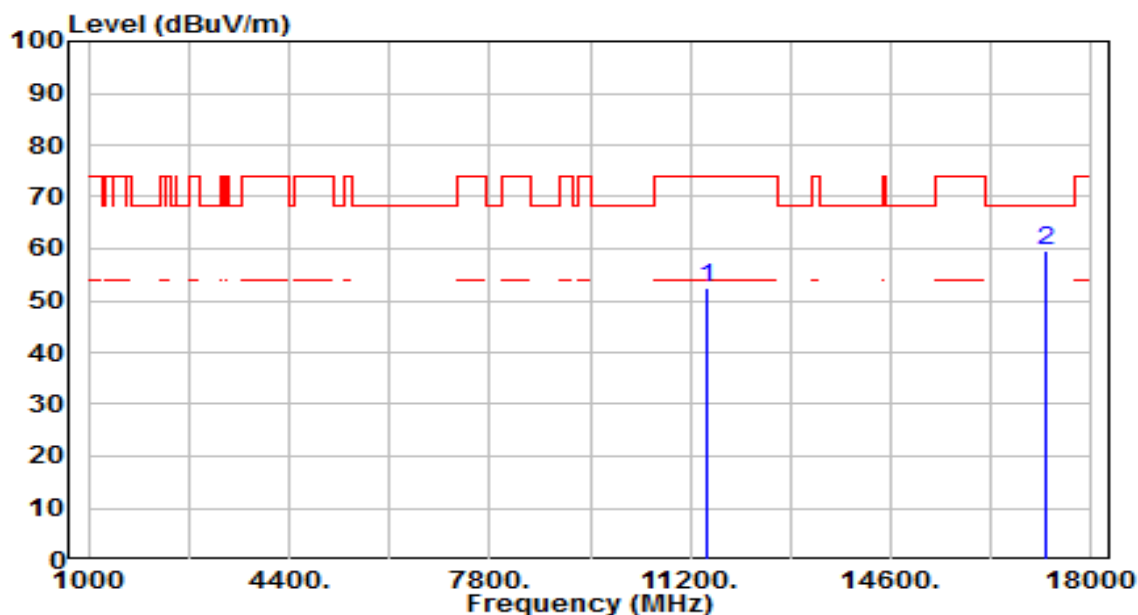


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	30.83	21.46	52.30	-21.70	74.00	100	312	Peak
2	*	17235.000	31.62	28.05	59.67	-8.53	68.20	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

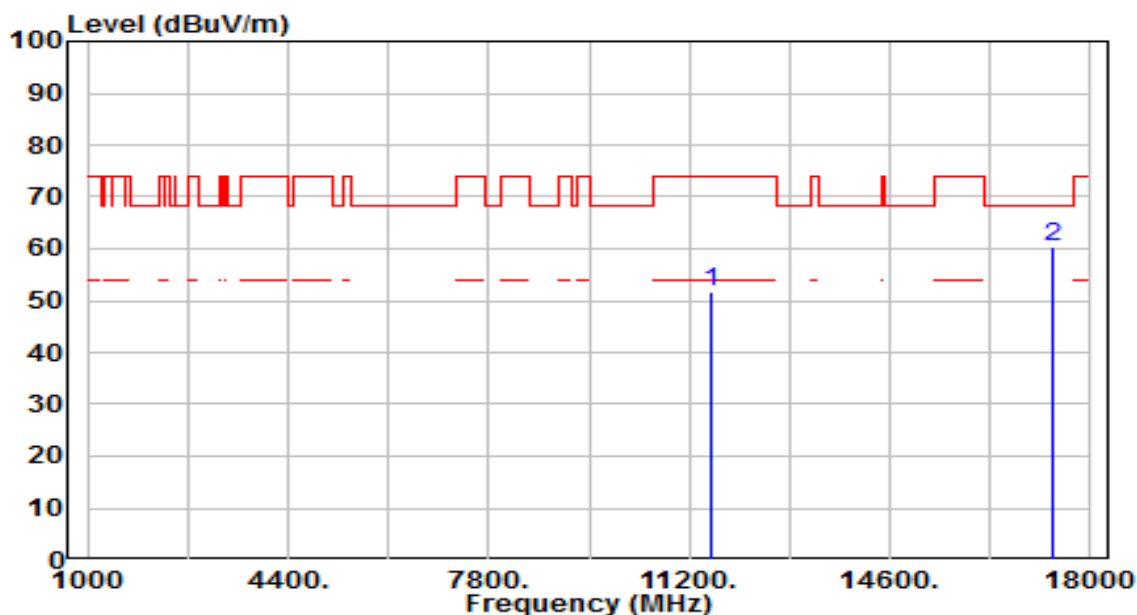


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	30.39	21.34	51.73	-22.27	74.00	100	44	Peak
2	*	17355.000	31.27	29.00	60.27	-7.93	68.20	100	344	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

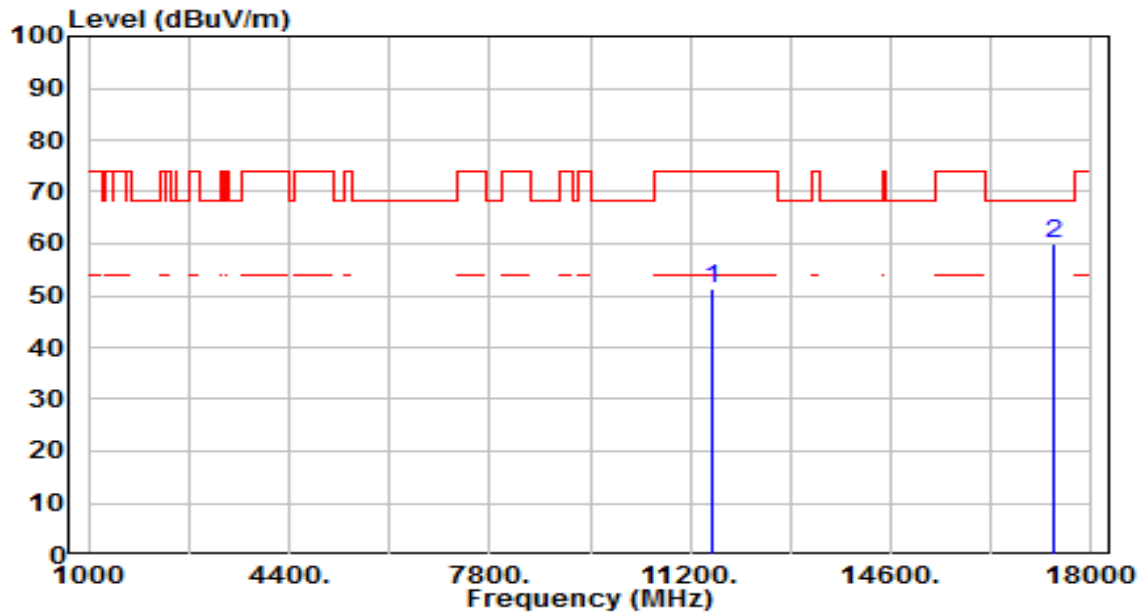


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	30.06	21.34	51.39	-22.61	74.00	100	157	Peak
2	*	17355.000	31.09	29.00	60.10	-8.10	68.20	100	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

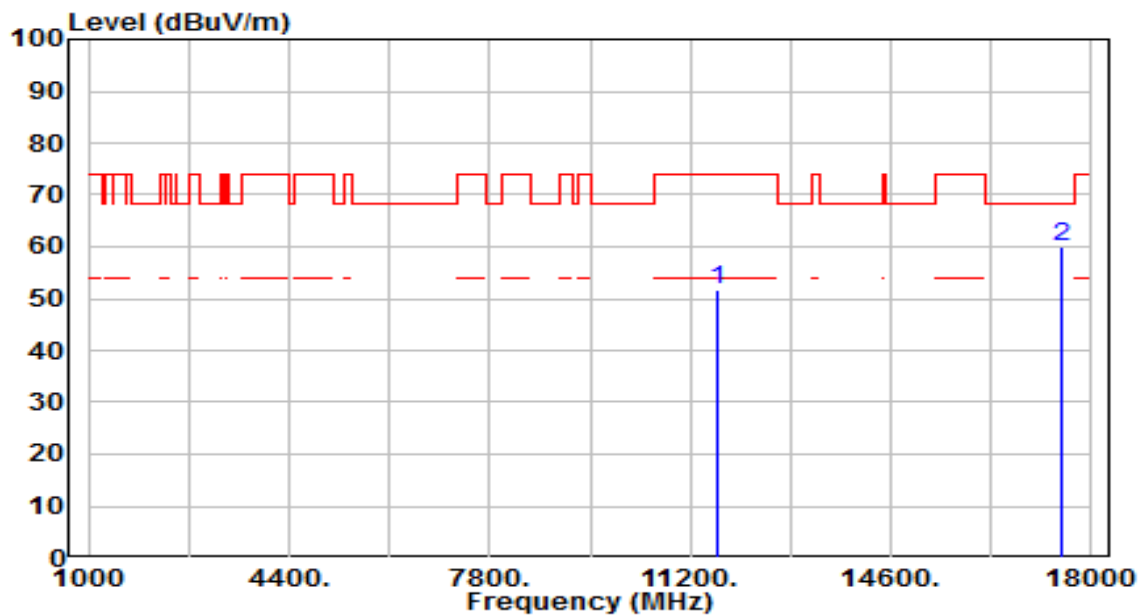


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	30.63	21.16	51.79	-22.21	74.00	100	90	Peak
2	*	17475.000	30.21	29.95	60.16	-8.04	68.20	100	261	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

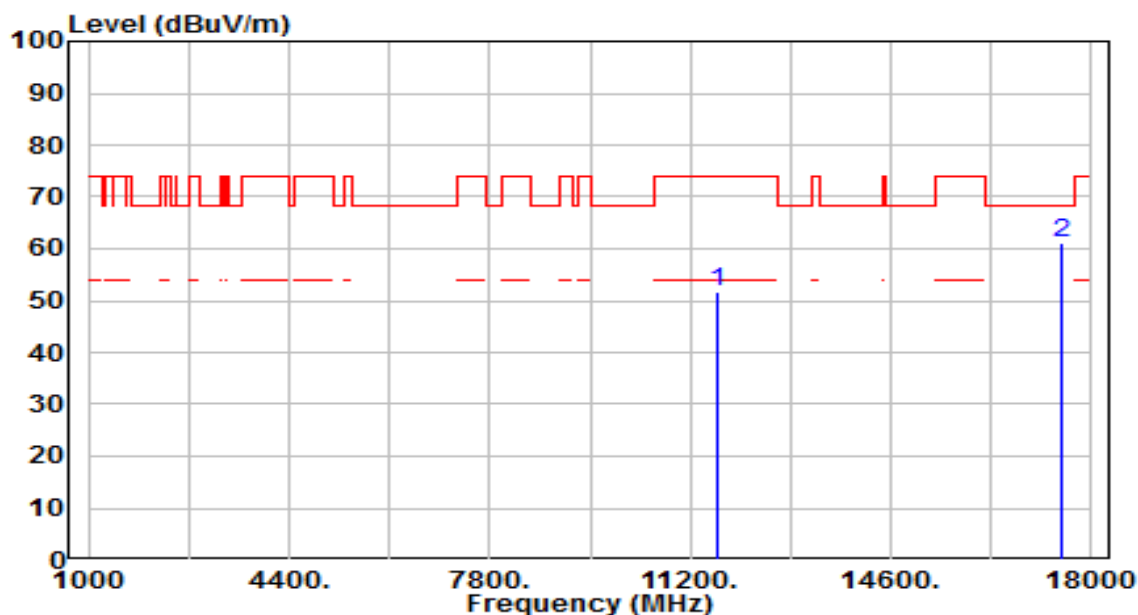


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	30.61	21.16	51.77	-22.23	74.00	100	15	Peak
2	*	17475.000	31.12	29.95	61.06	-7.14	68.20	100	286	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

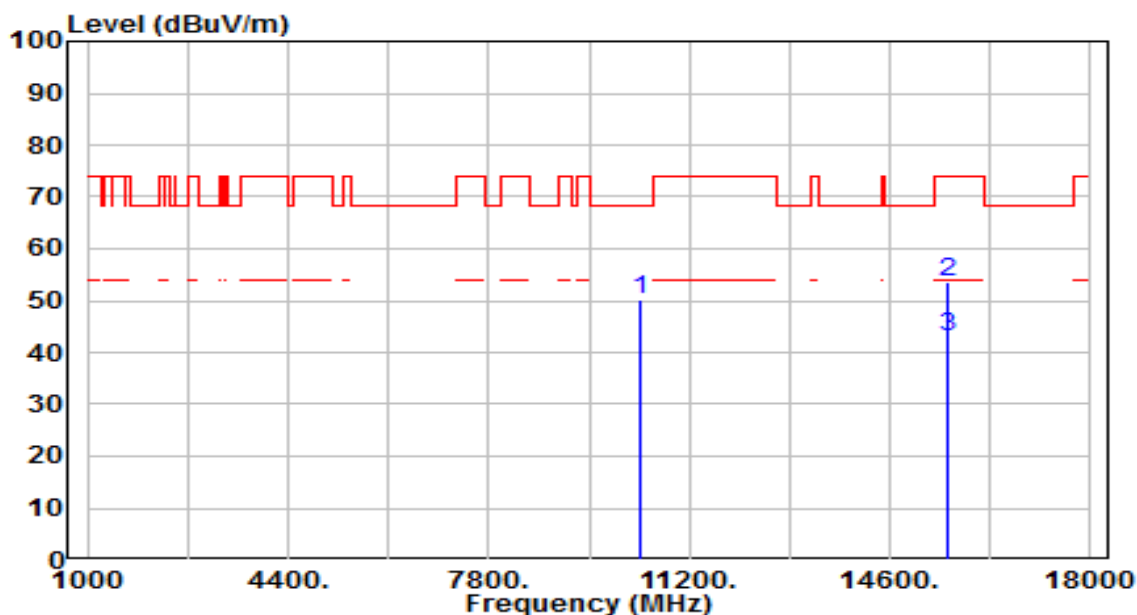


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	31.19	19.05	50.24	-17.96	68.20	100	131	Peak
2		15570.000	31.48	22.14	53.62	-20.38	74.00	100	337	Peak
3	*	15570.000	21.00	22.14	43.14	-10.86	54.00	100	337	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

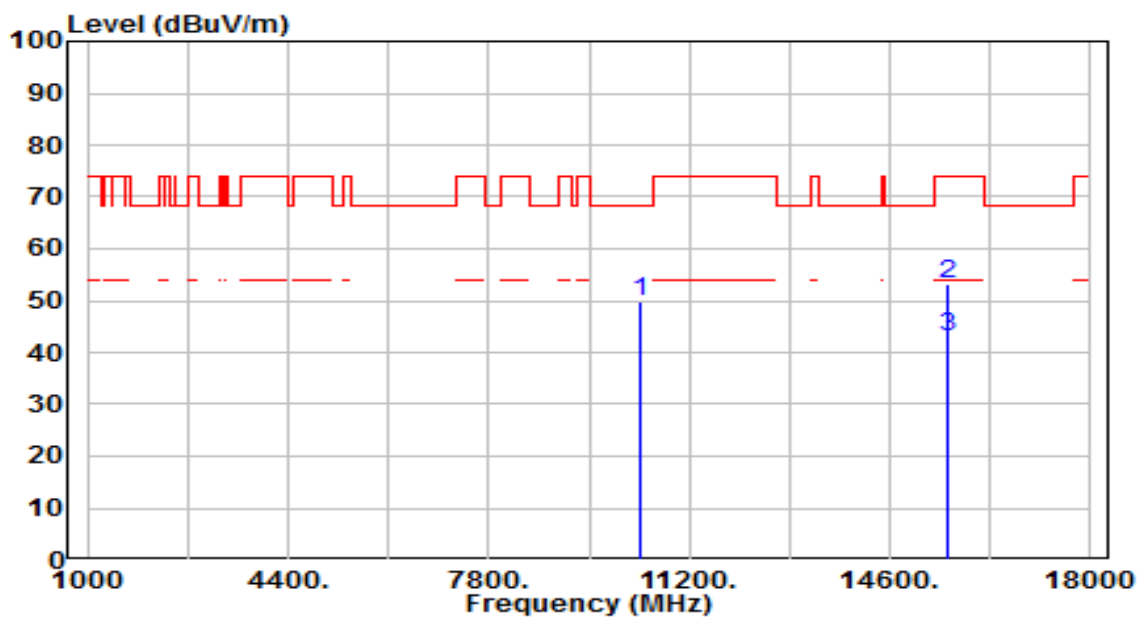


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	30.66	19.05	49.72	-18.48	68.20	100	168	Peak
2		15570.000	31.16	22.14	53.30	-20.70	74.00	100	54	Peak
3	*	15570.000	20.70	22.14	42.84	-11.16	54.00	100	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

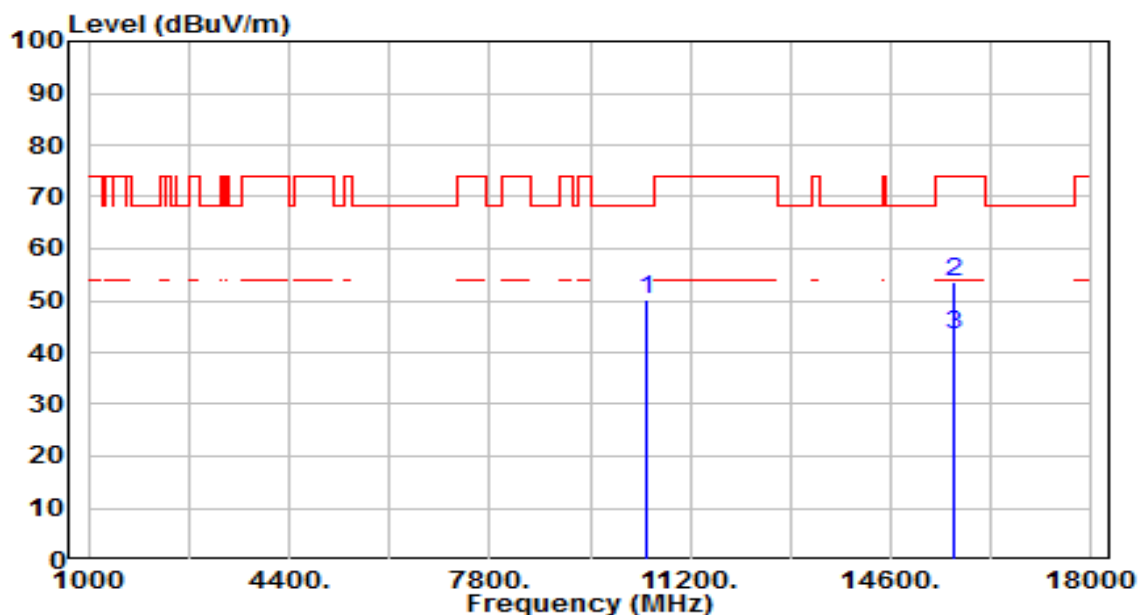


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	30.77	19.42	50.19	-18.01	68.20	100	332	Peak
2		15690.000	31.66	21.93	53.59	-20.41	74.00	100	322	Peak
3	*	15690.000	21.30	21.93	43.23	-10.77	54.00	100	322	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

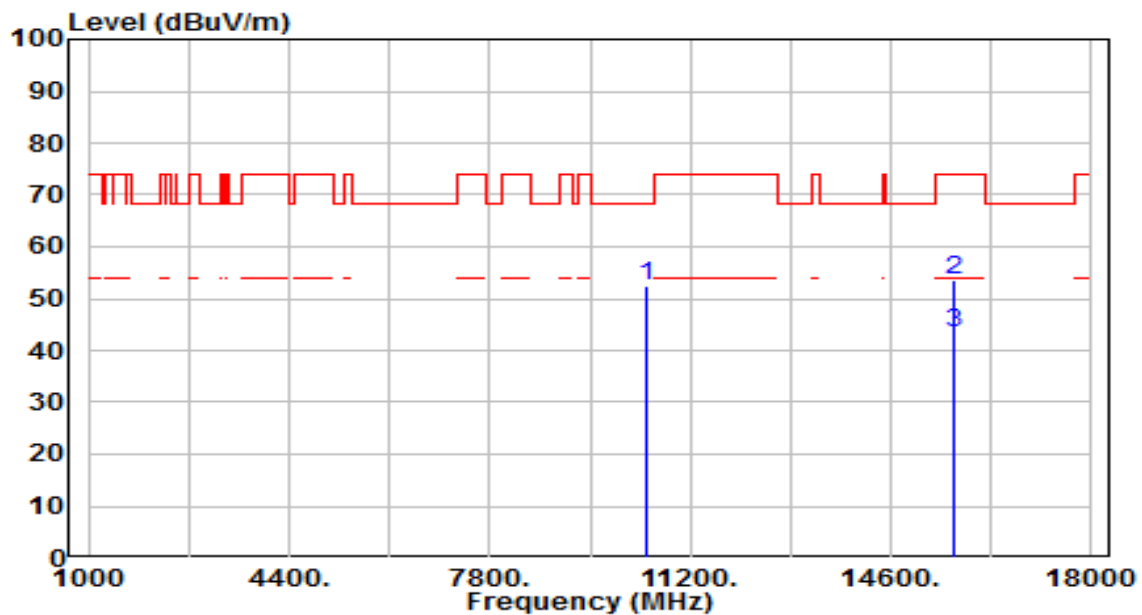


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	33.21	19.42	52.63	-15.57	68.20	100	179	Peak
2		15690.000	31.83	21.93	53.75	-20.25	74.00	100	158	Peak
3	*	15690.000	21.40	21.93	43.33	-10.67	54.00	100	158	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

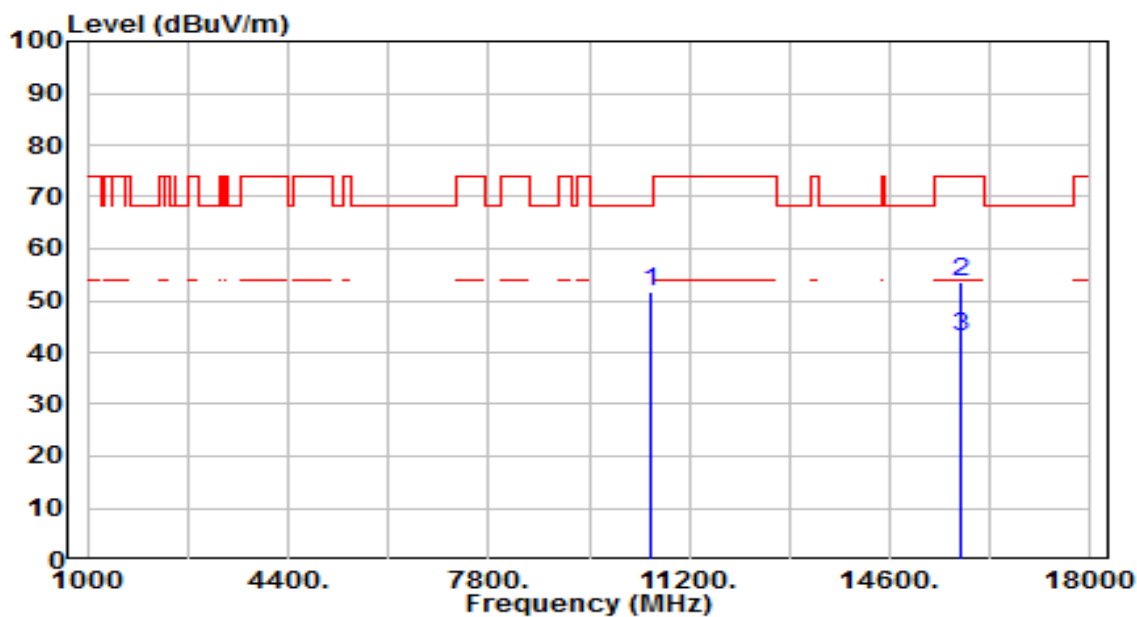


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	31.90	19.67	51.57	-16.63	68.20	100	105	Peak
2		15810.000	31.86	21.67	53.53	-20.47	74.00	100	341	Peak
3	*	15810.000	21.50	21.67	43.17	-10.83	54.00	100	341	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

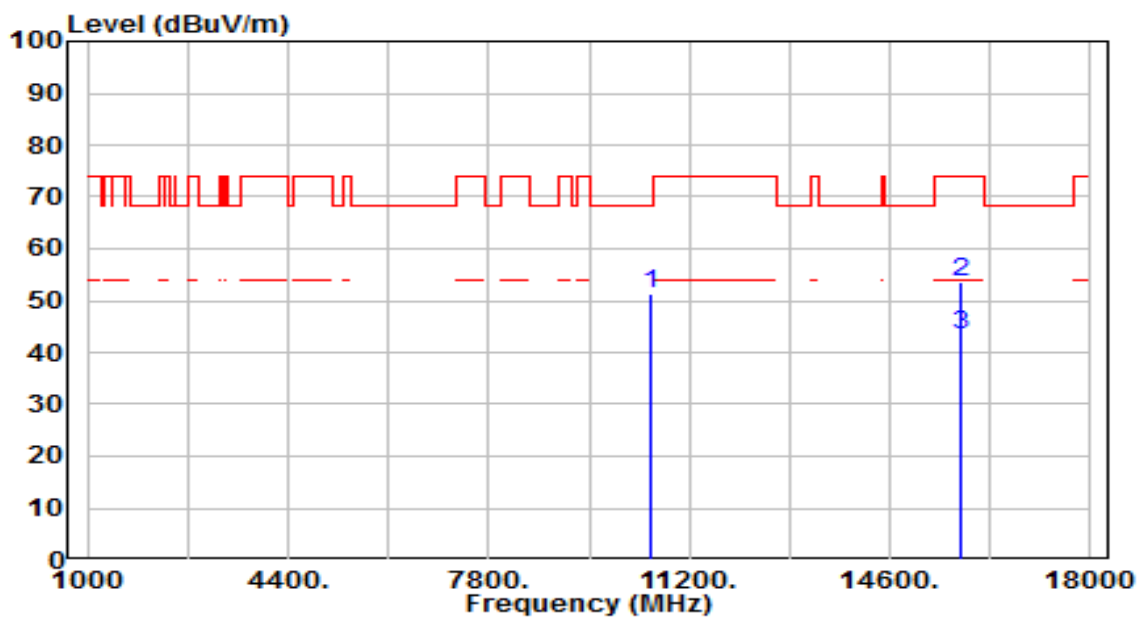


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	31.63	19.67	51.30	-16.90	68.20	100	307	Peak
2		15810.000	32.05	21.67	53.72	-20.28	74.00	100	117	Peak
3	*	15810.000	21.70	21.67	43.37	-10.63	54.00	100	117	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

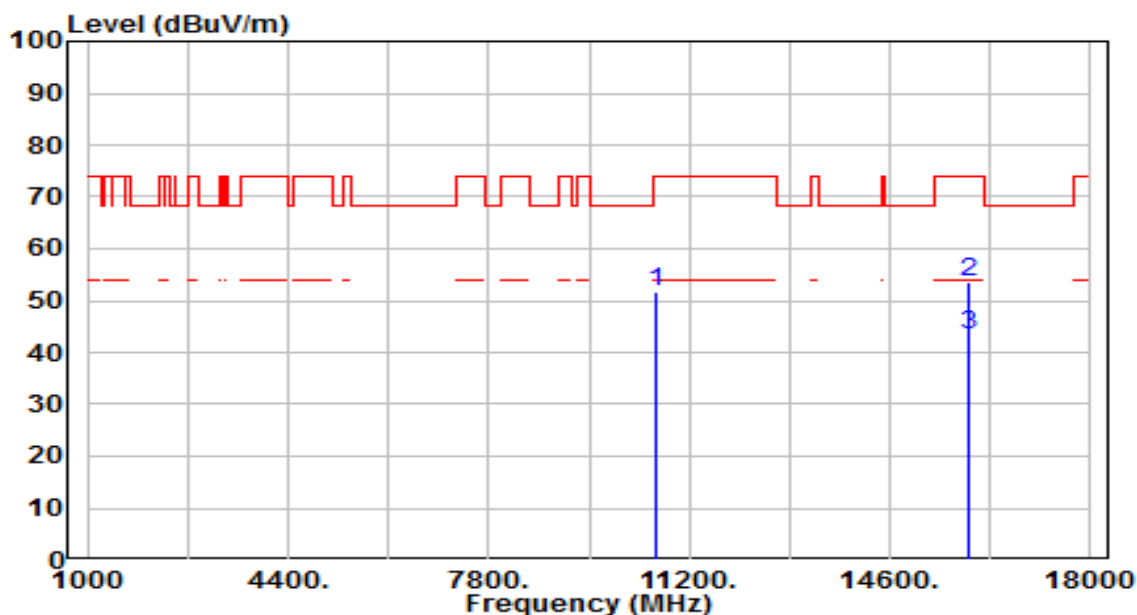


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	32.00	19.82	51.81	-22.19	74.00	100	152	Peak
2	*	15930.000	32.17	21.51	53.68	-20.32	74.00	100	261	Peak
3	*	15930.000	21.80	21.51	43.31	-10.69	54.00	100	261	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

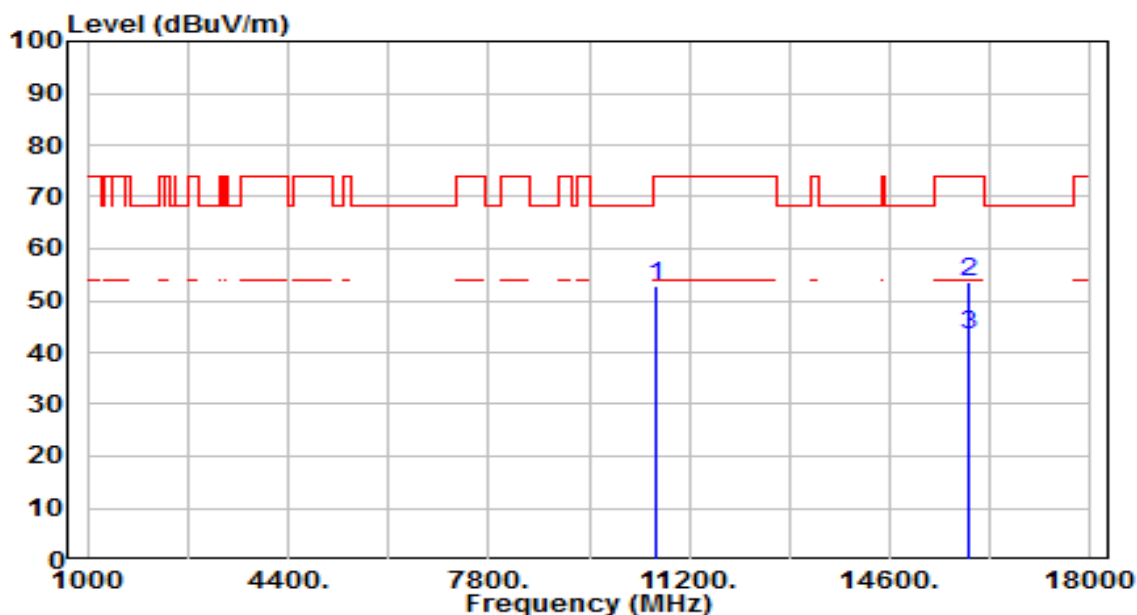


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	32.93	19.82	52.75	-21.25	74.00	100	76	Peak
2	*	15930.000	32.11	21.51	53.62	-20.38	74.00	100	225	Peak
3	*	15930.000	21.70	21.51	43.21	-10.79	54.00	100	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

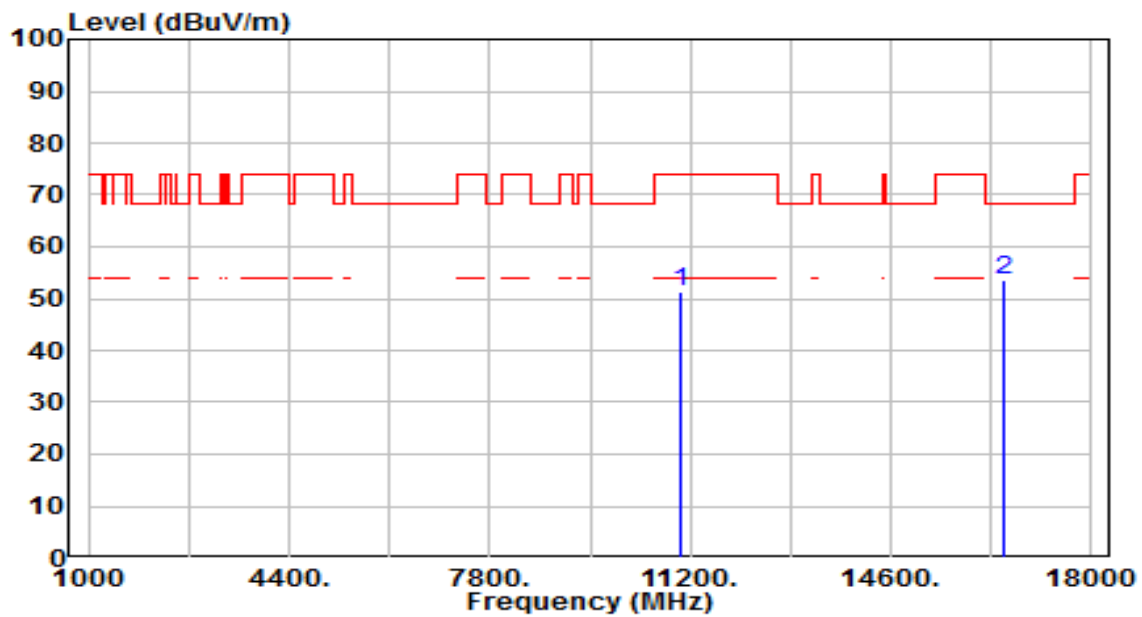


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	30.90	20.48	51.39	-22.61	74.00	100	321	Peak
2	*	16530.000	30.53	23.12	53.66	-14.54	68.20	100	233	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

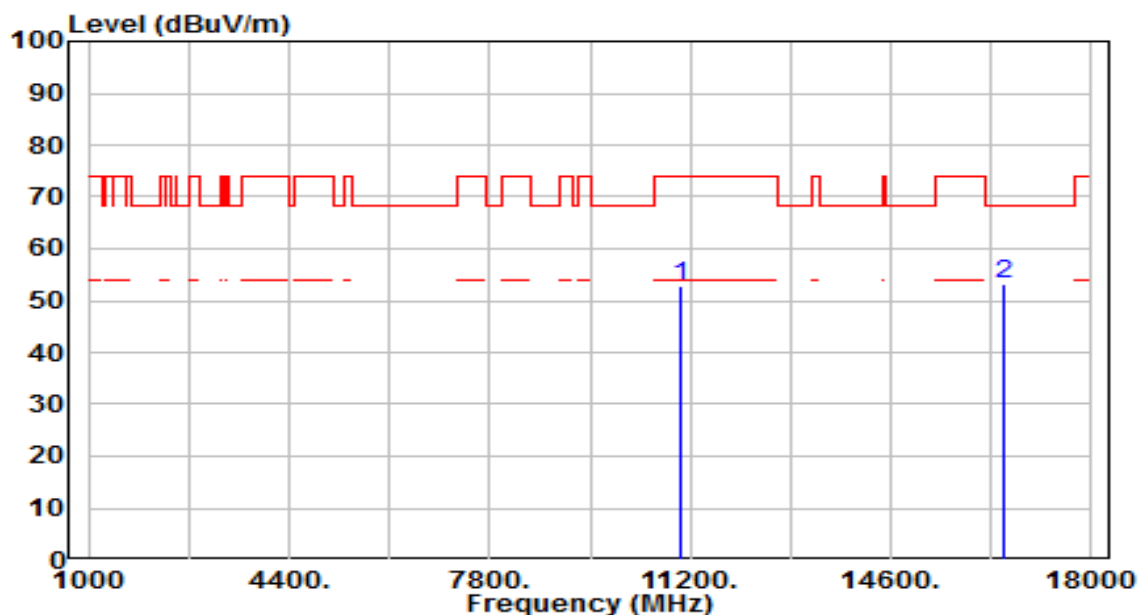


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	32.29	20.48	52.77	-21.23	74.00	100	2	Peak
2	*	16530.000	30.22	23.12	53.34	-14.86	68.20	100	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

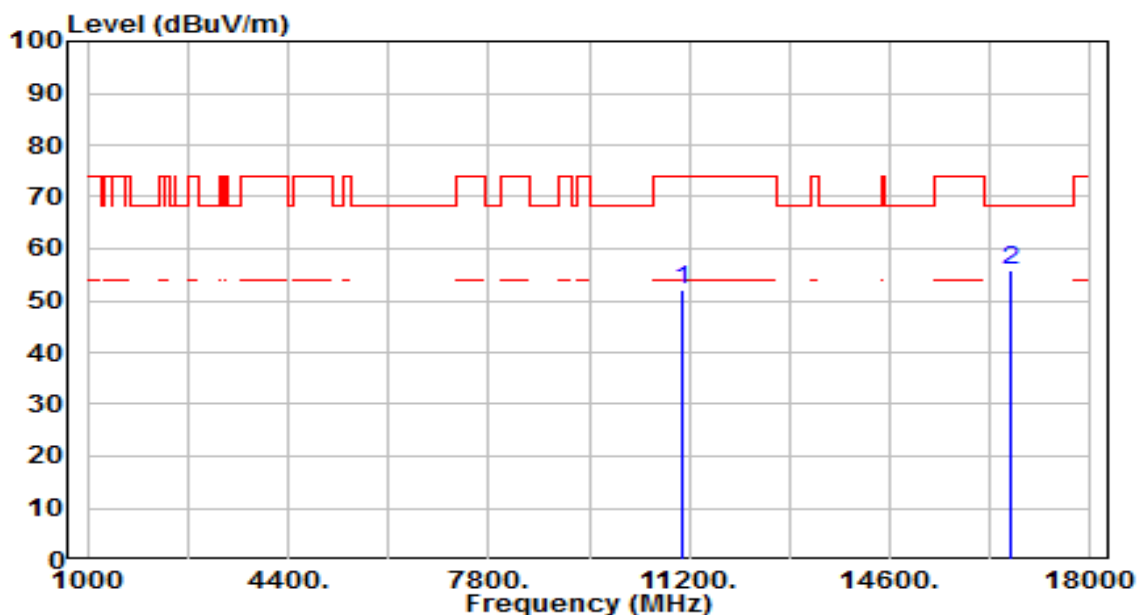


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	31.50	20.66	52.16	-21.84	74.00	100	0	Peak
2	*	16650.000	31.81	23.90	55.72	-12.48	68.20	100	326	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

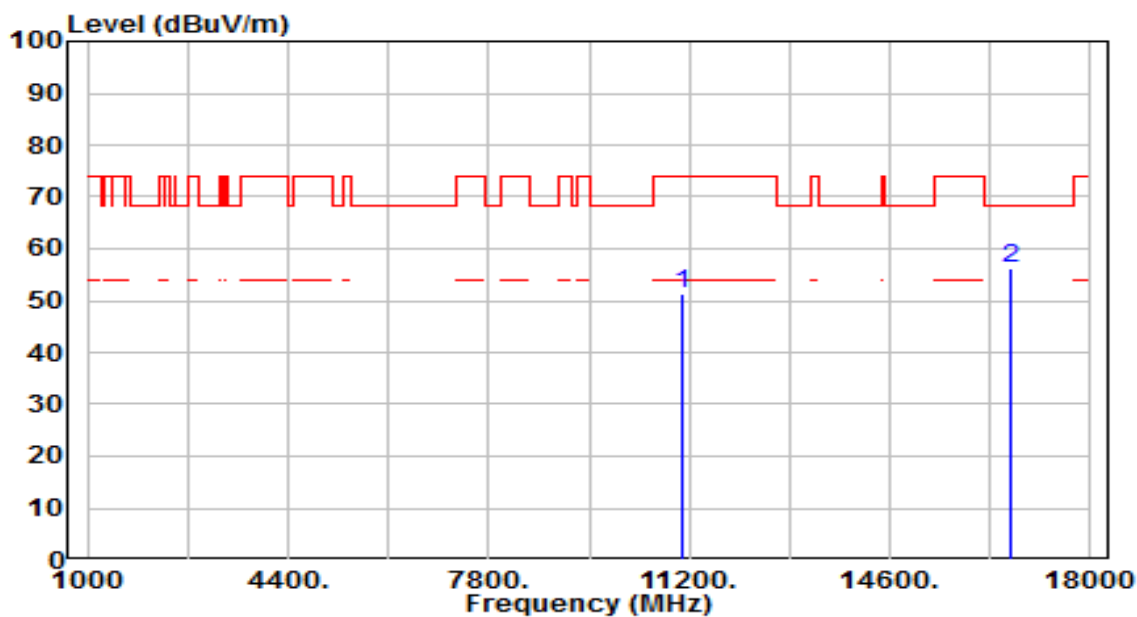


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	30.78	20.66	51.43	-22.57	74.00	100	169	Peak
2	*	16650.000	32.48	23.90	56.38	-11.82	68.20	100	87	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

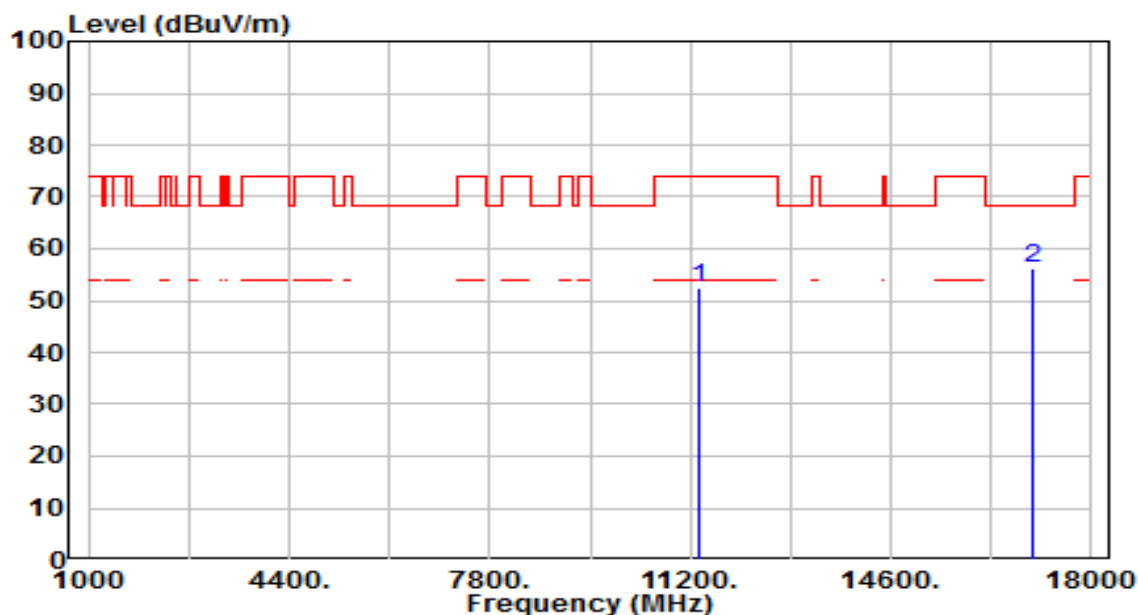


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	31.18	21.21	52.39	-21.61	74.00	100	160	Peak
2	*	17010.000	29.74	26.31	56.06	-12.14	68.20	100	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

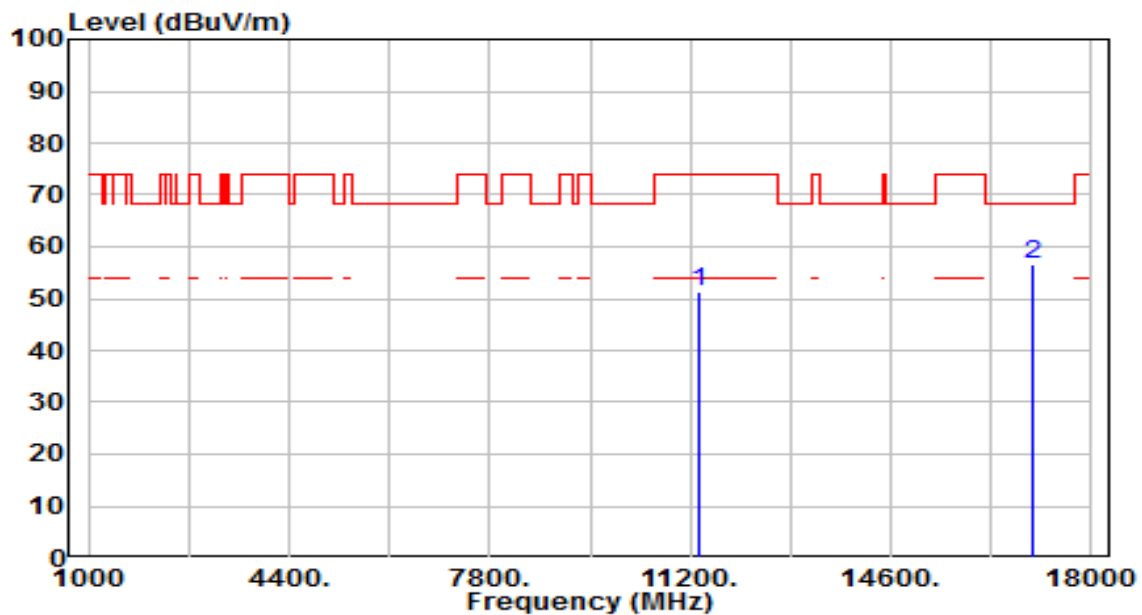


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	30.28	21.21	51.49	-22.51	74.00	100	50	Peak
2	*	17010.000	30.44	26.31	56.76	-11.44	68.20	100	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

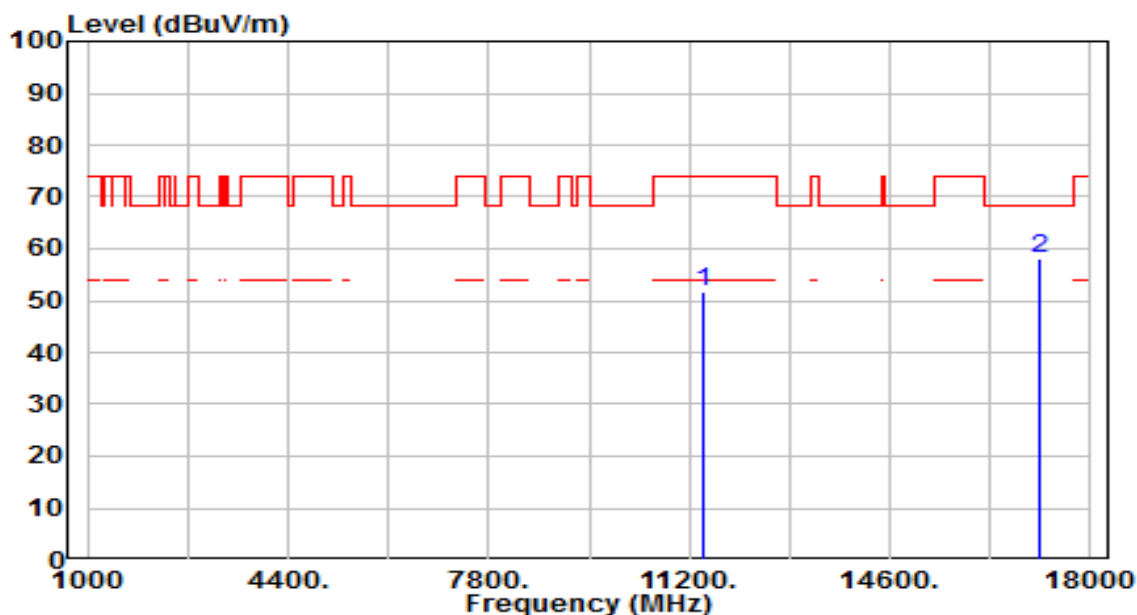


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	30.49	21.35	51.84	-22.16	74.00	100	171	Peak
2	*	17130.000	30.73	27.21	57.94	-10.26	68.20	100	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

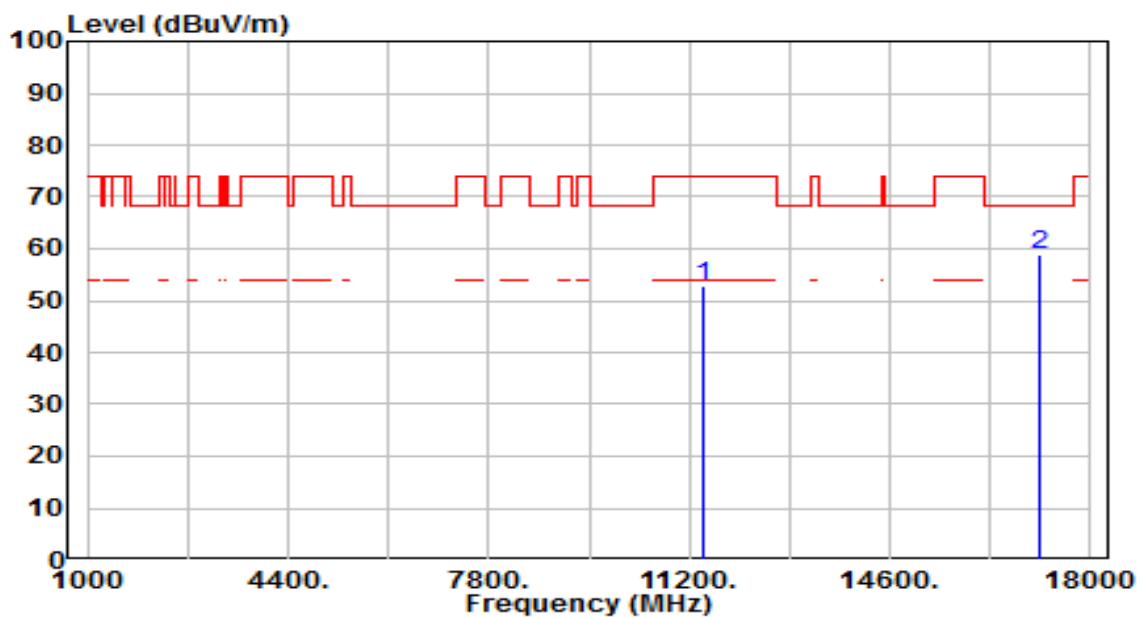


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	31.47	21.35	52.81	-21.19	74.00	100	33	Peak
2	*	17130.000	31.56	27.21	58.77	-9.43	68.20	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

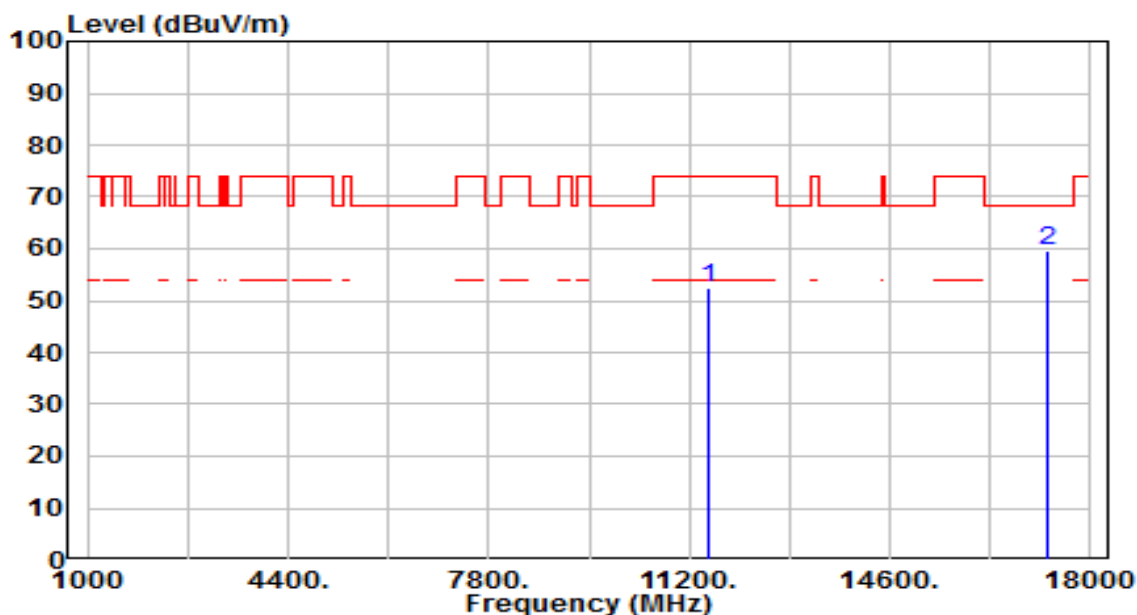


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	31.01	21.46	52.47	-21.53	74.00	100	34	Peak
2	*	17265.000	31.16	28.30	59.46	-8.74	68.20	100	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

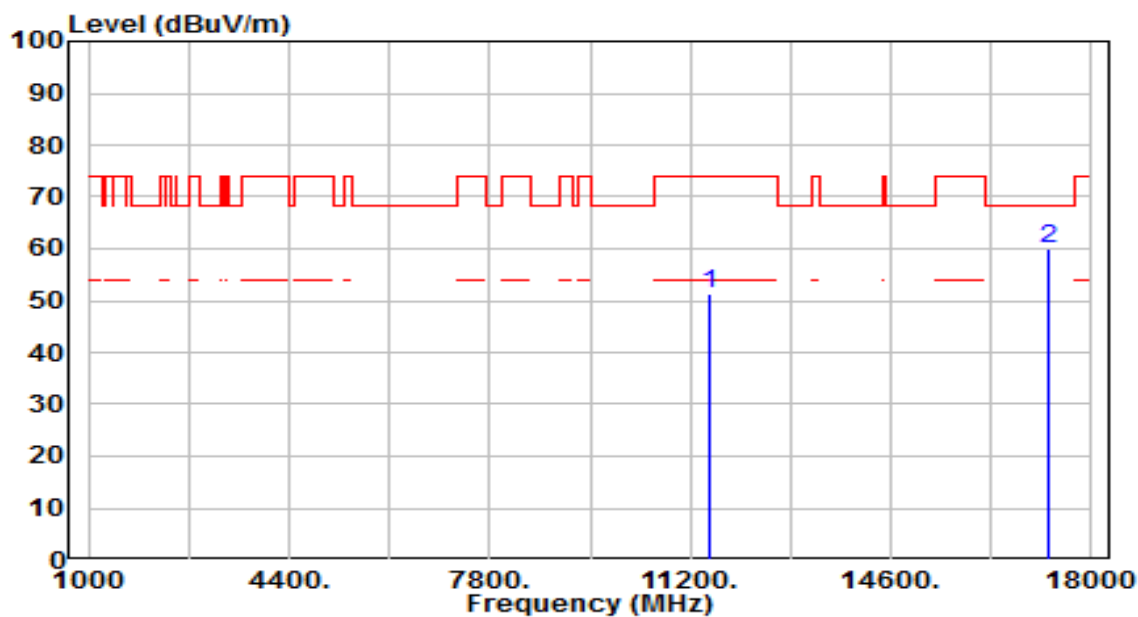


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	30.02	21.46	51.48	-22.52	74.00	100	70	Peak
2	*	17265.000	31.64	28.30	59.95	-8.25	68.20	100	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

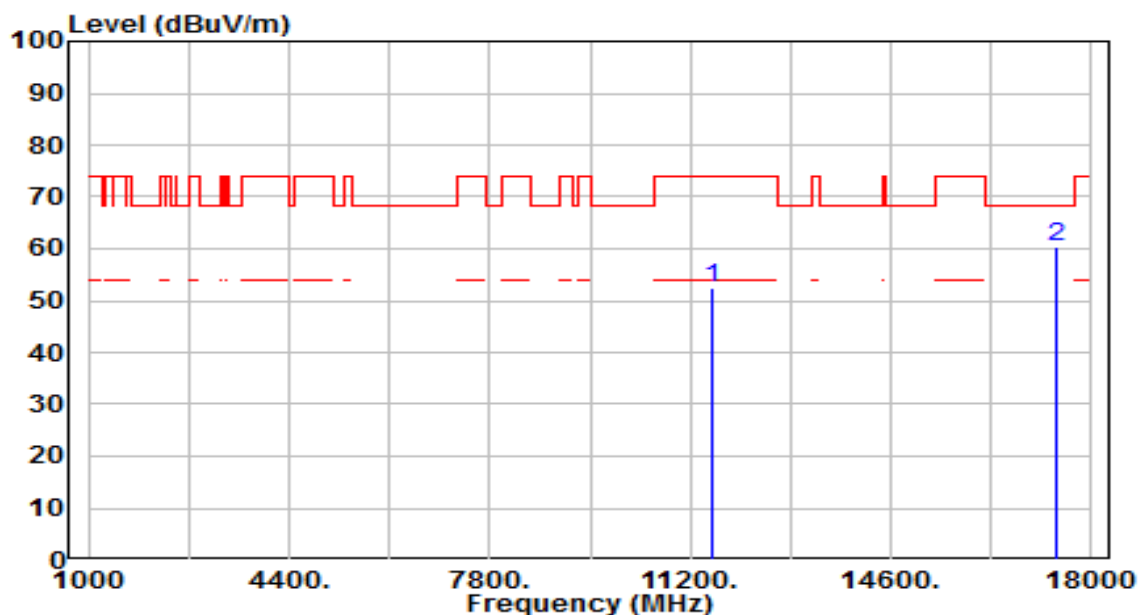


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	31.05	21.29	52.34	-21.66	74.00	100	183	Peak
2	*	17385.000	31.15	29.22	60.37	-7.83	68.20	100	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

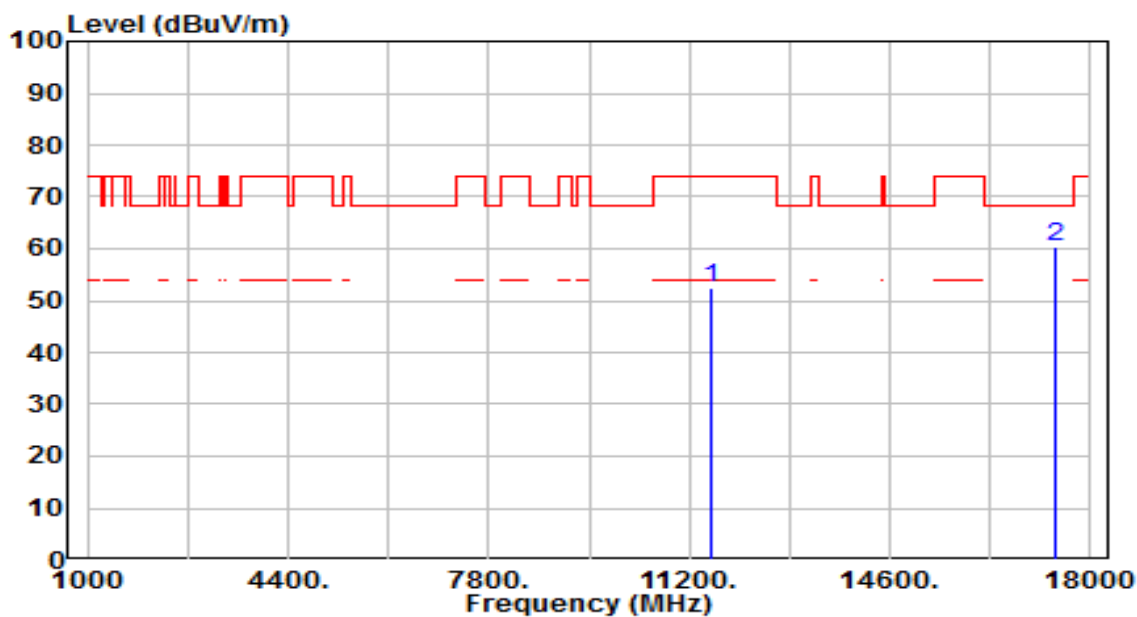


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	31.07	21.29	52.37	-21.63	74.00	100	240	Peak
2	*	17385.000	31.22	29.22	60.44	-7.76	68.20	100	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

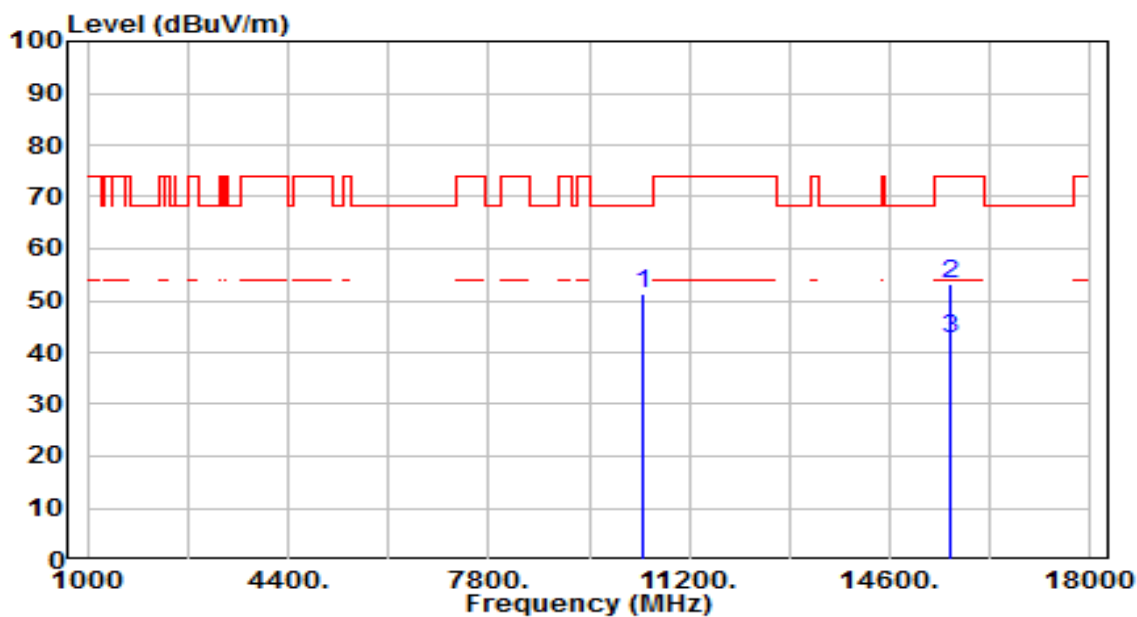


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	31.94	19.23	51.17	-17.03	68.20	100	255	Peak
2		15630.000	31.09	22.02	53.11	-20.89	74.00	100	3	Peak
3	*	15630.000	20.60	22.02	42.62	-11.38	54.00	100	3	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

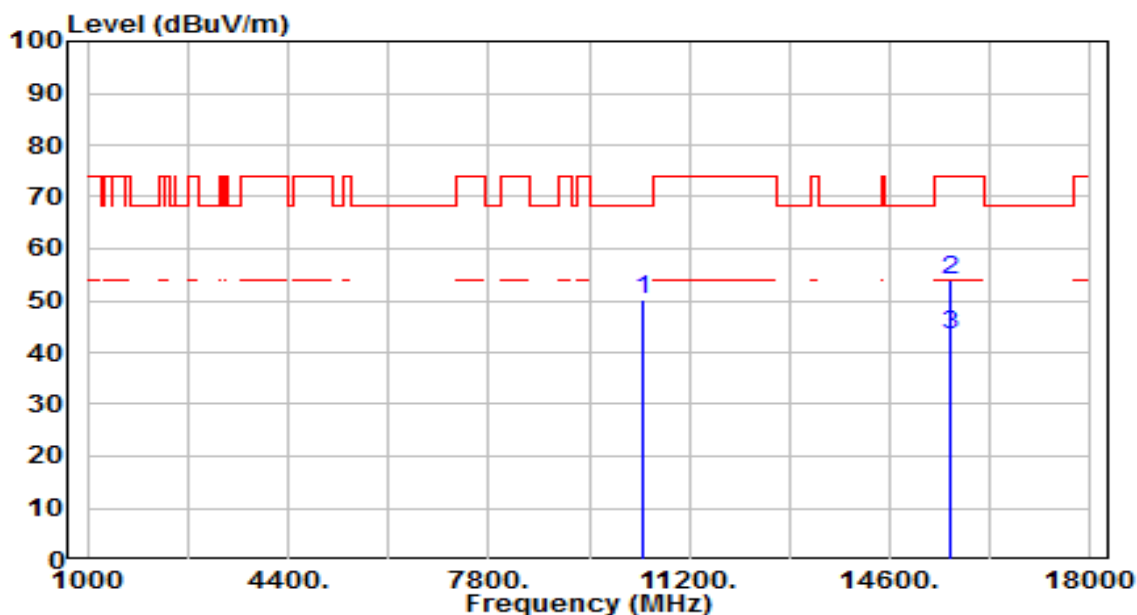


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	31.14	19.23	50.38	-17.82	68.20	100	187	Peak
2		15630.000	31.87	22.02	53.90	-20.10	74.00	100	286	Peak
3	*	15630.000	21.40	22.02	43.42	-10.58	54.00	100	286	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

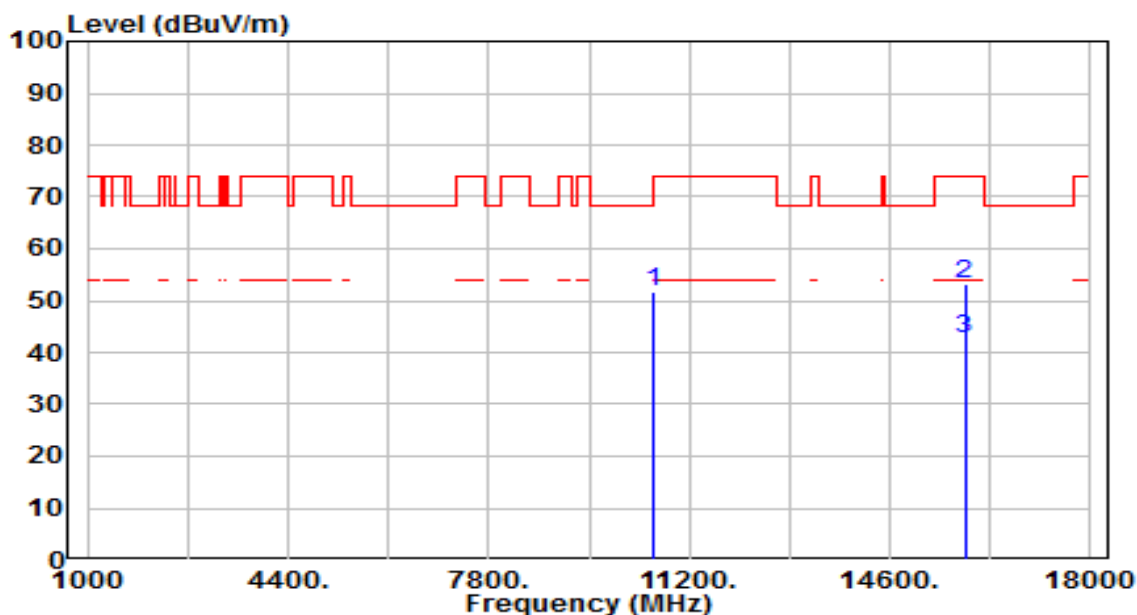


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	32.12	19.74	51.86	-16.34	68.20	100	309	Peak
2		15870.000	31.58	21.61	53.19	-20.81	74.00	100	330	Peak
3	*	15870.000	21.10	21.61	42.71	-11.29	54.00	100	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

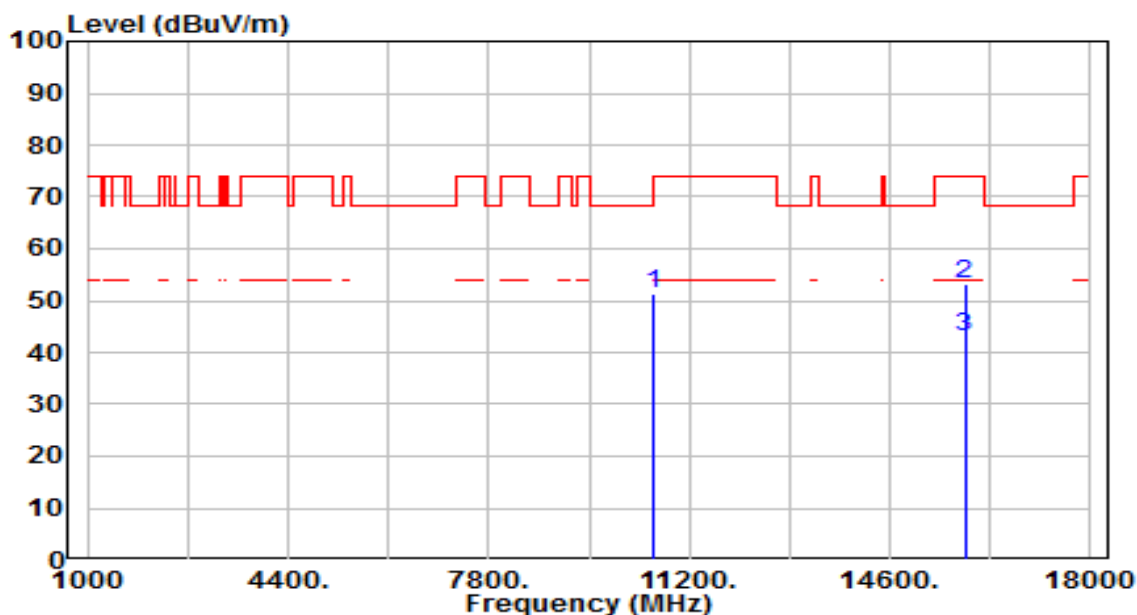


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	31.58	19.74	51.32	-16.88	68.20	100	290	Peak
2		15870.000	31.76	21.61	53.38	-20.62	74.00	100	296	Peak
3	*	15870.000	21.30	21.61	42.91	-11.09	54.00	100	296	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

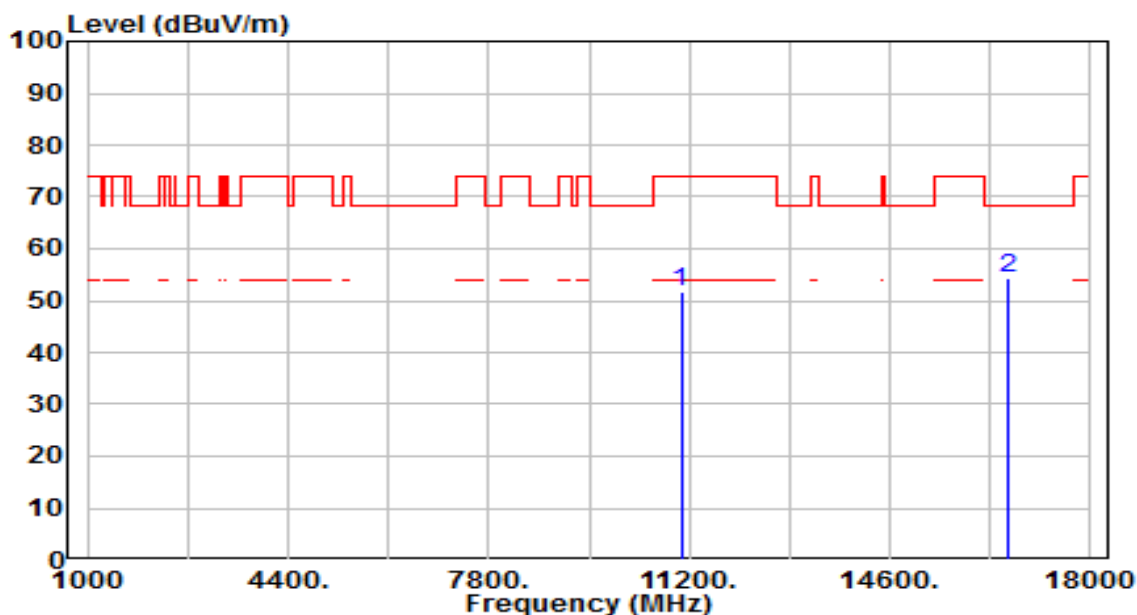


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	31.03	20.57	51.60	-22.40	74.00	100	267	Peak
2	*	16590.000	30.76	23.50	54.26	-13.94	68.20	100	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

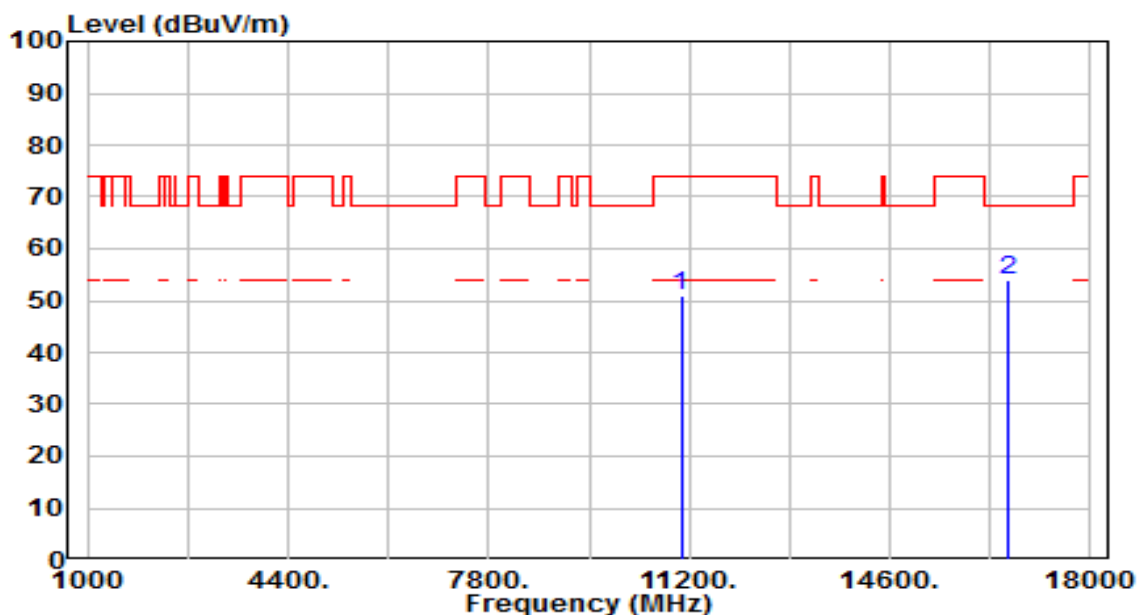


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	30.52	20.57	51.09	-22.91	74.00	100	302	Peak
2	*	16590.000	30.54	23.50	54.04	-14.16	68.20	100	234	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

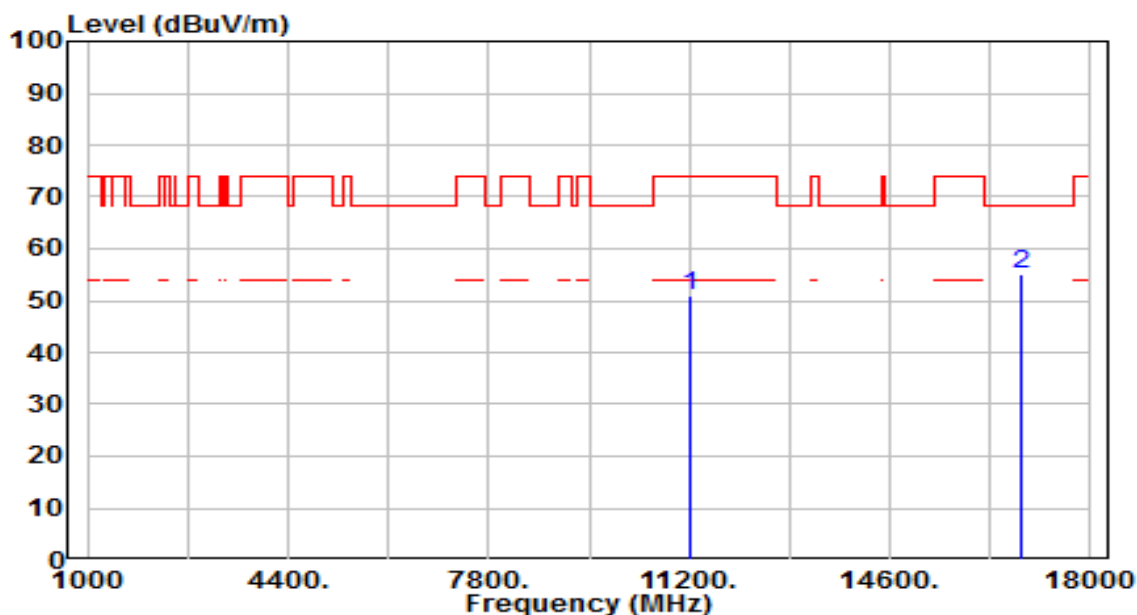


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	30.03	20.96	50.99	-23.01	74.00	100	117	Peak
2	*	16830.000	29.87	25.13	55.00	-13.20	68.20	100	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

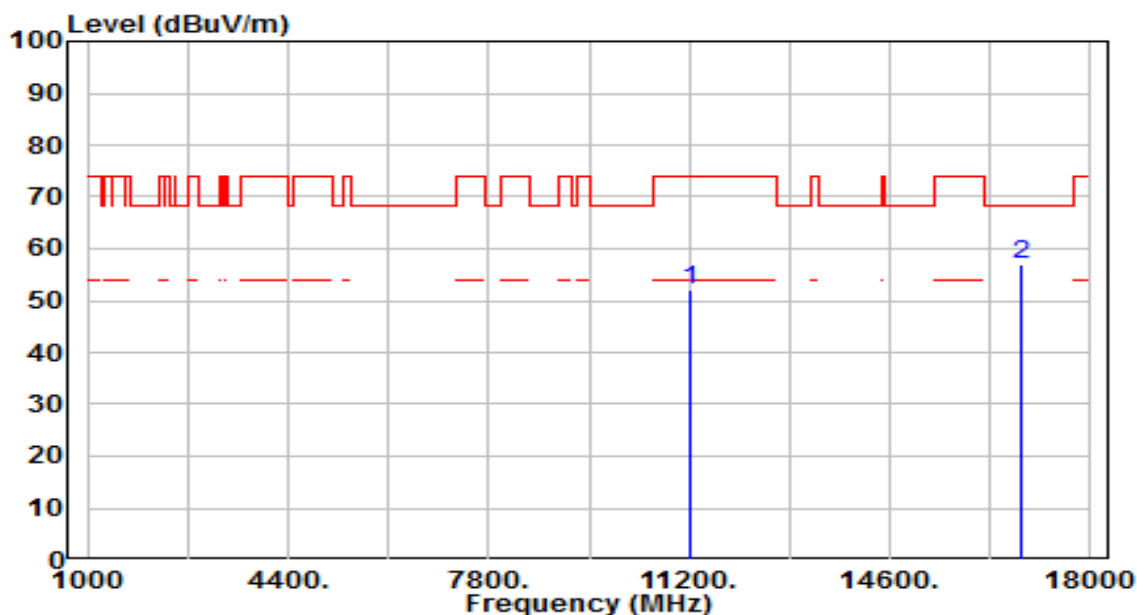


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	31.10	20.96	52.05	-21.95	74.00	100	108	Peak
2	*	16830.000	31.71	25.13	56.83	-11.37	68.20	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

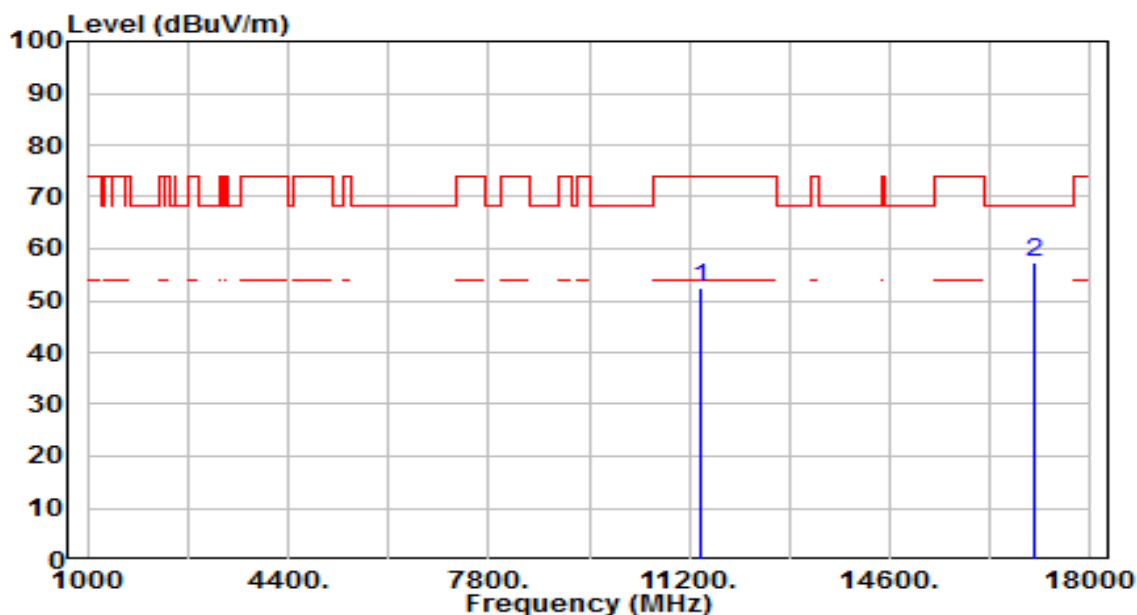


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	31.23	21.28	52.51	-21.49	74.00	100	292	Peak
2	*	17070.000	30.58	26.76	57.34	-10.86	68.20	100	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

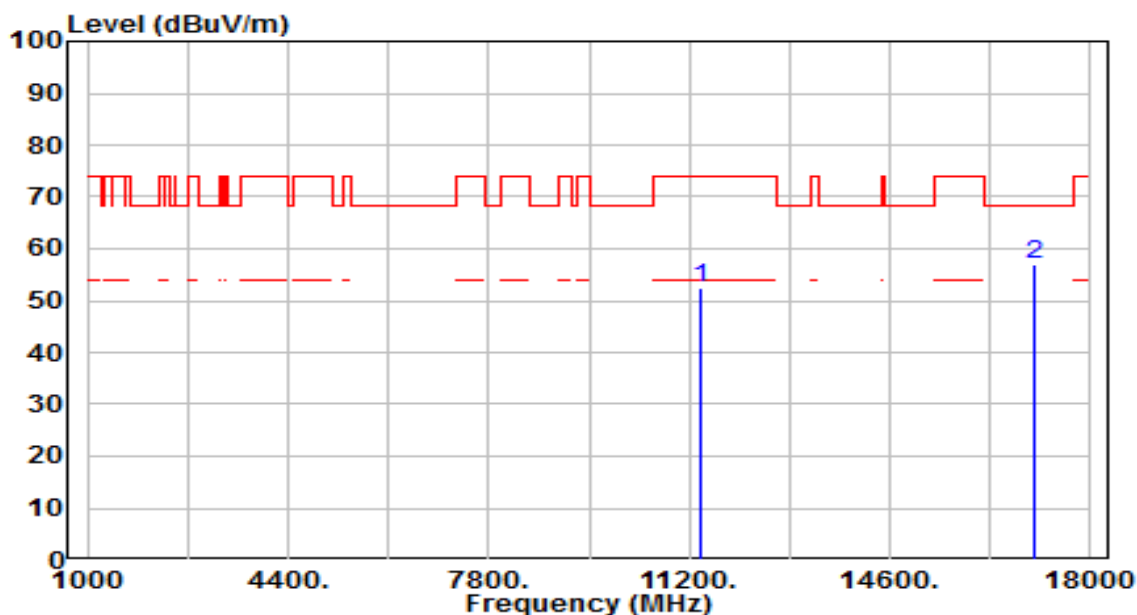


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	31.10	21.28	52.38	-21.62	74.00	100	20	Peak
2	*	17070.000	30.35	26.76	57.10	-11.10	68.20	100	109	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

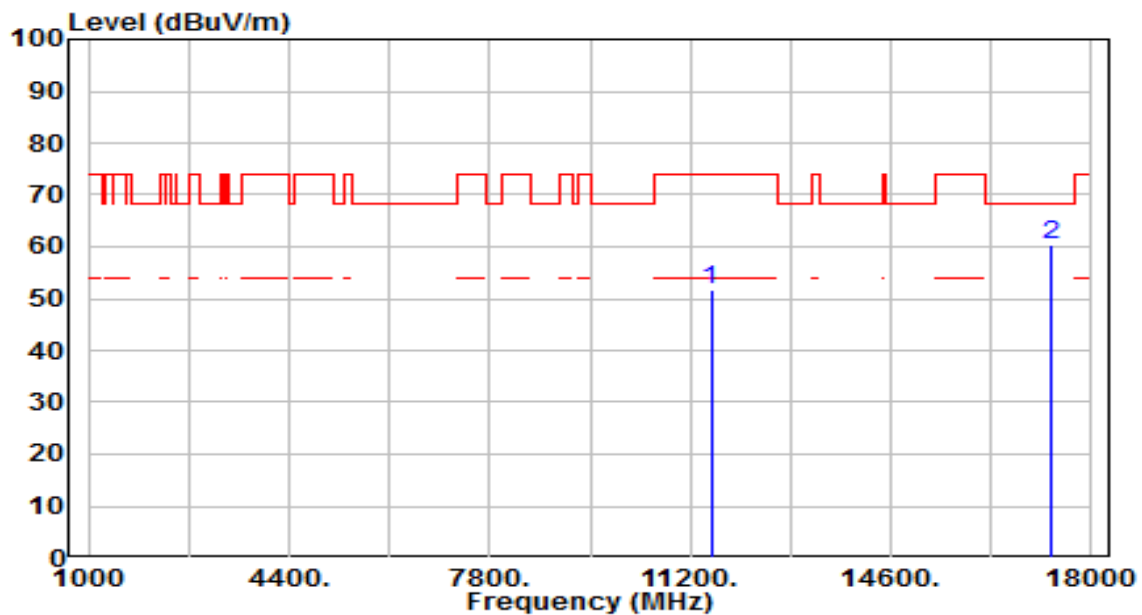


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	30.14	21.38	51.52	-22.48	74.00	100	86	Peak
2	*	17325.000	31.54	28.78	60.32	-7.88	68.20	100	44	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

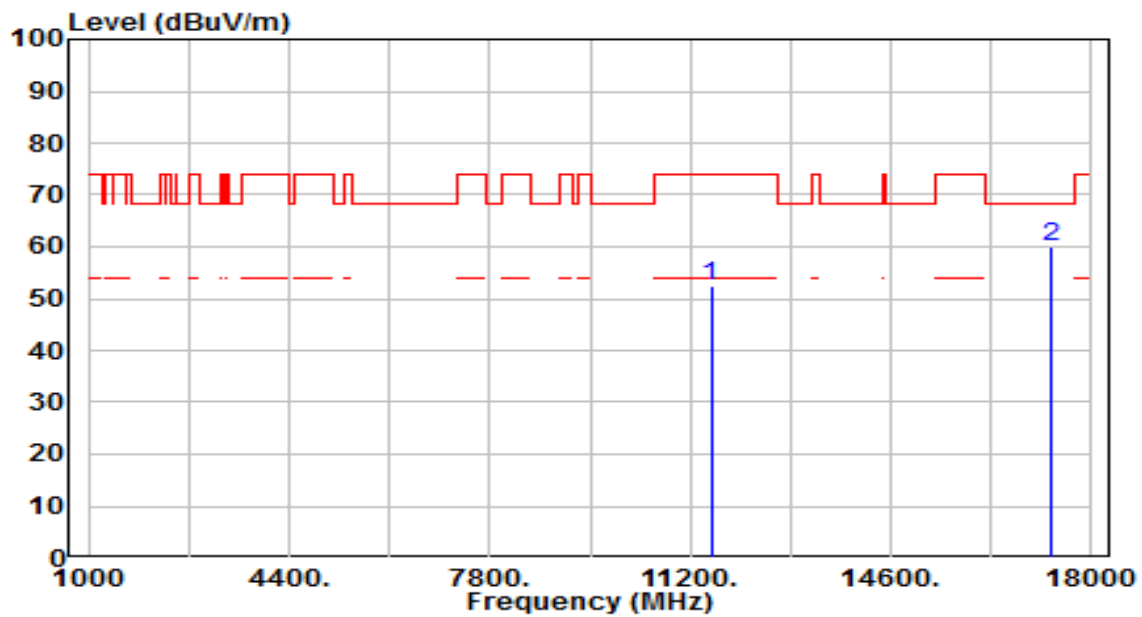


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	30.93	21.38	52.31	-21.69	74.00	100	248	Peak
2	*	17325.000	31.07	28.78	59.85	-8.35	68.20	100	301	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

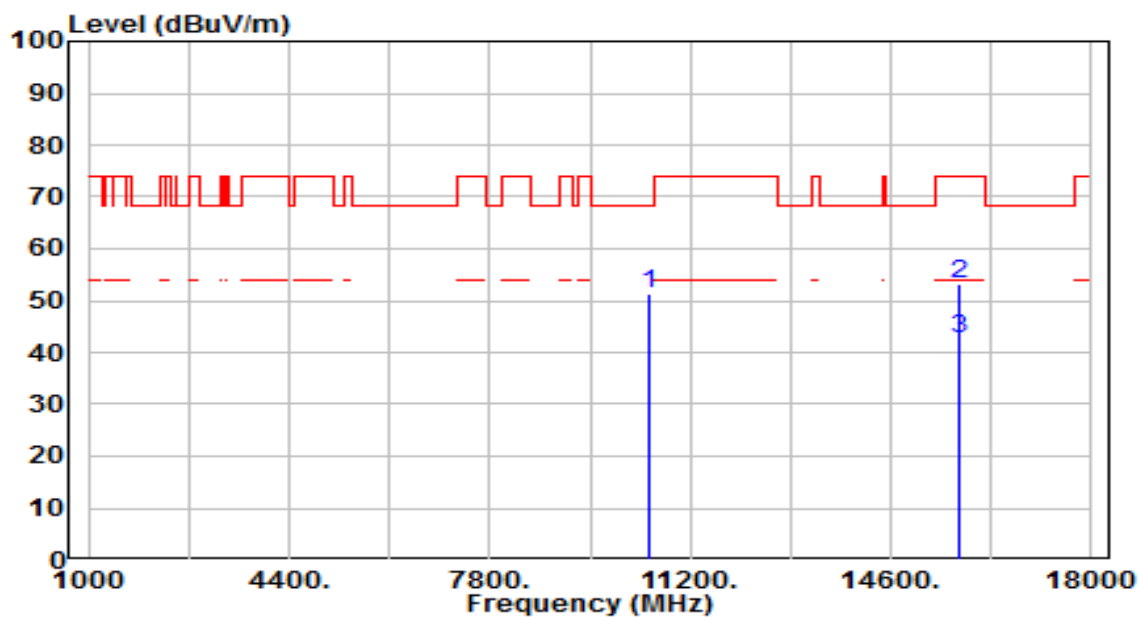


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	31.70	19.61	51.30	-16.90	68.20	100	100	Peak
2		15750.000	31.34	21.79	53.13	-20.87	74.00	100	18	Peak
3	*	15750.000	21.00	21.79	42.79	-11.21	54.00	100	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

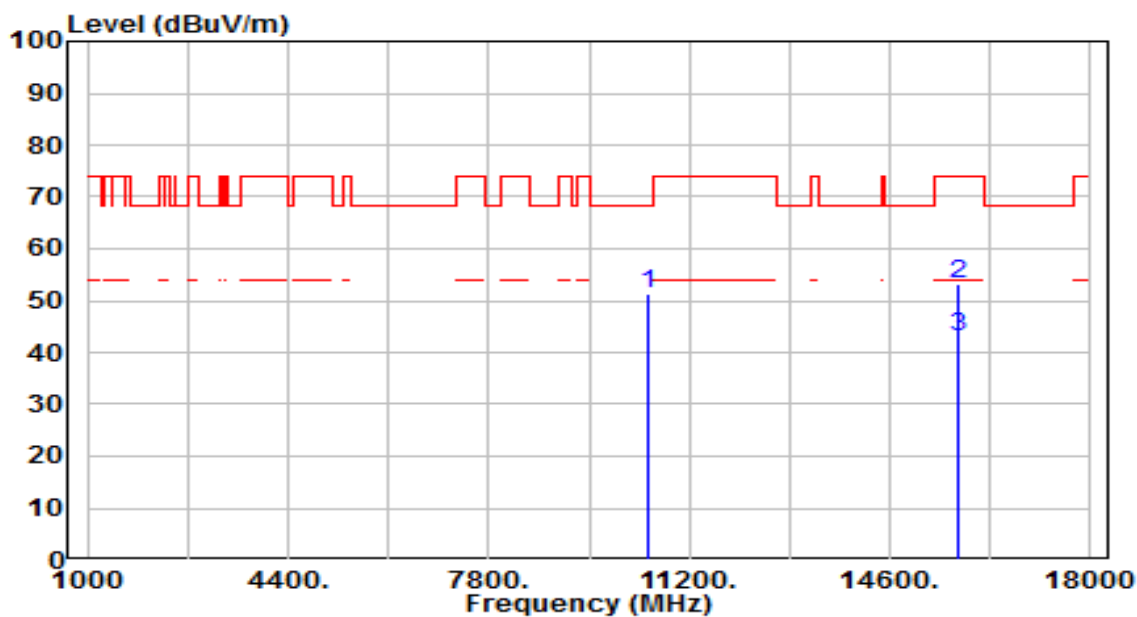


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	31.67	19.61	51.27	-16.93	68.20	100	135	Peak
2		15750.000	31.57	21.79	53.36	-20.64	74.00	100	1	Peak
3	*	15750.000	21.10	21.79	42.89	-11.11	54.00	100	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

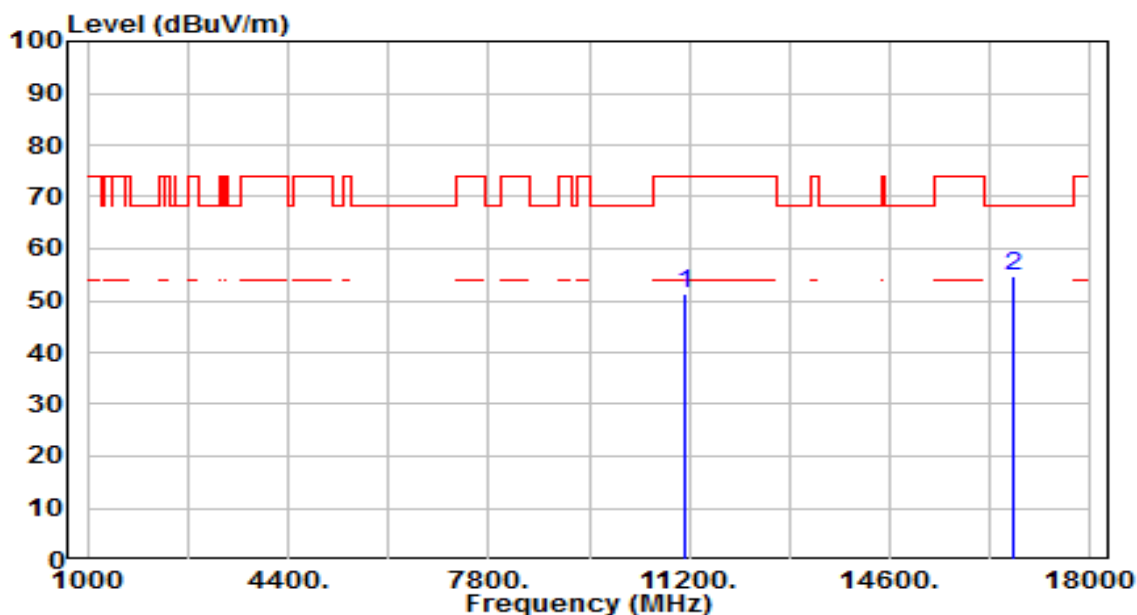


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	30.58	20.76	51.33	-22.67	74.00	100	28	Peak
2	*	16710.000	30.28	24.31	54.58	-13.62	68.20	100	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-11
Factor	BBHA 9120D	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

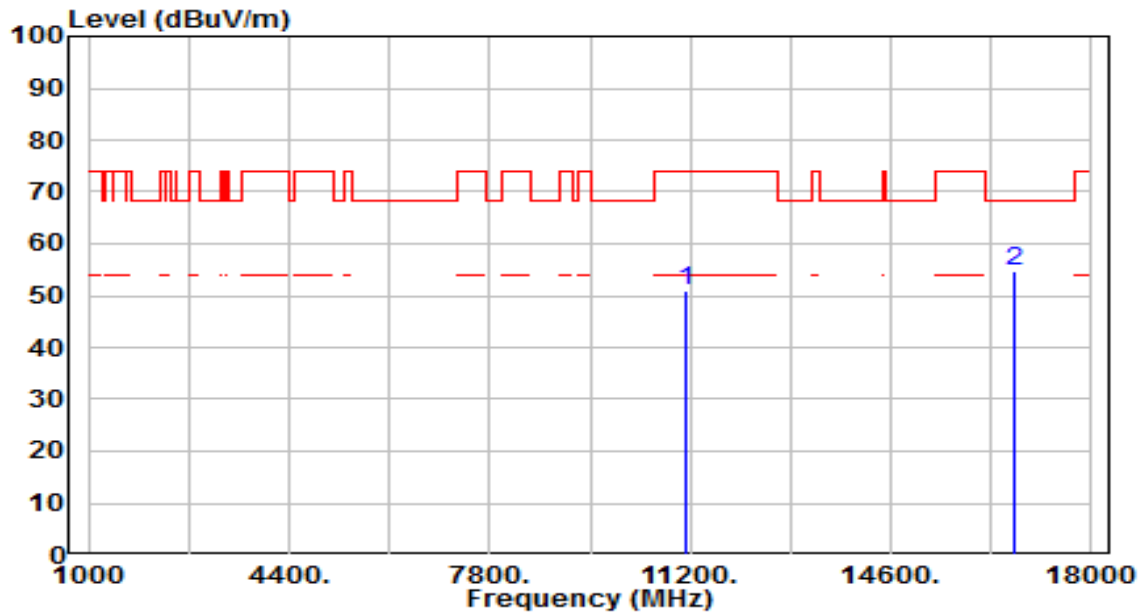

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	30.34	20.76	51.10	-22.90	74.00	100	296	Peak
2	*	16710.000	30.36	24.31	54.67	-13.53	68.20	100	358	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.