


Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

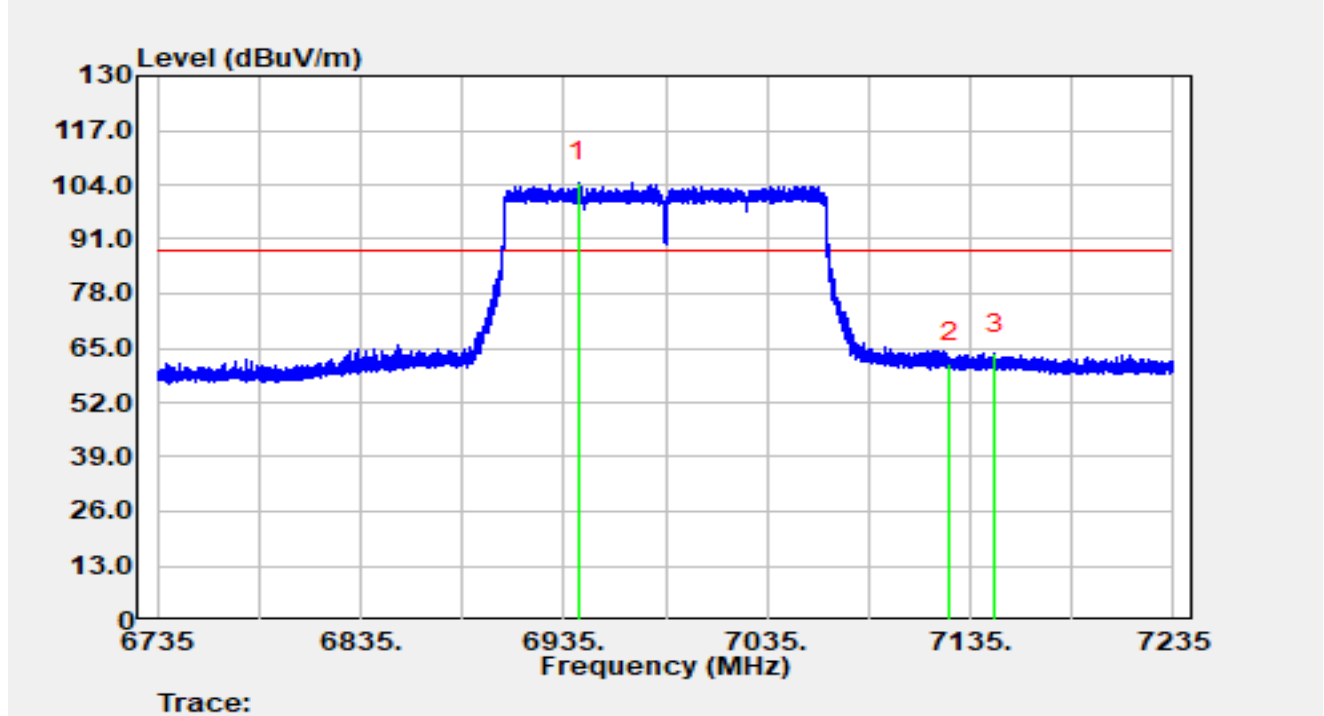


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6942.05	80.92	23.68	104.60	N/A	N/A	Peak
2		7125.00	37.06	24.48	61.54	-26.66	88.20	Peak
3	*	7147.40	39.00	24.75	63.75	-24.45	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

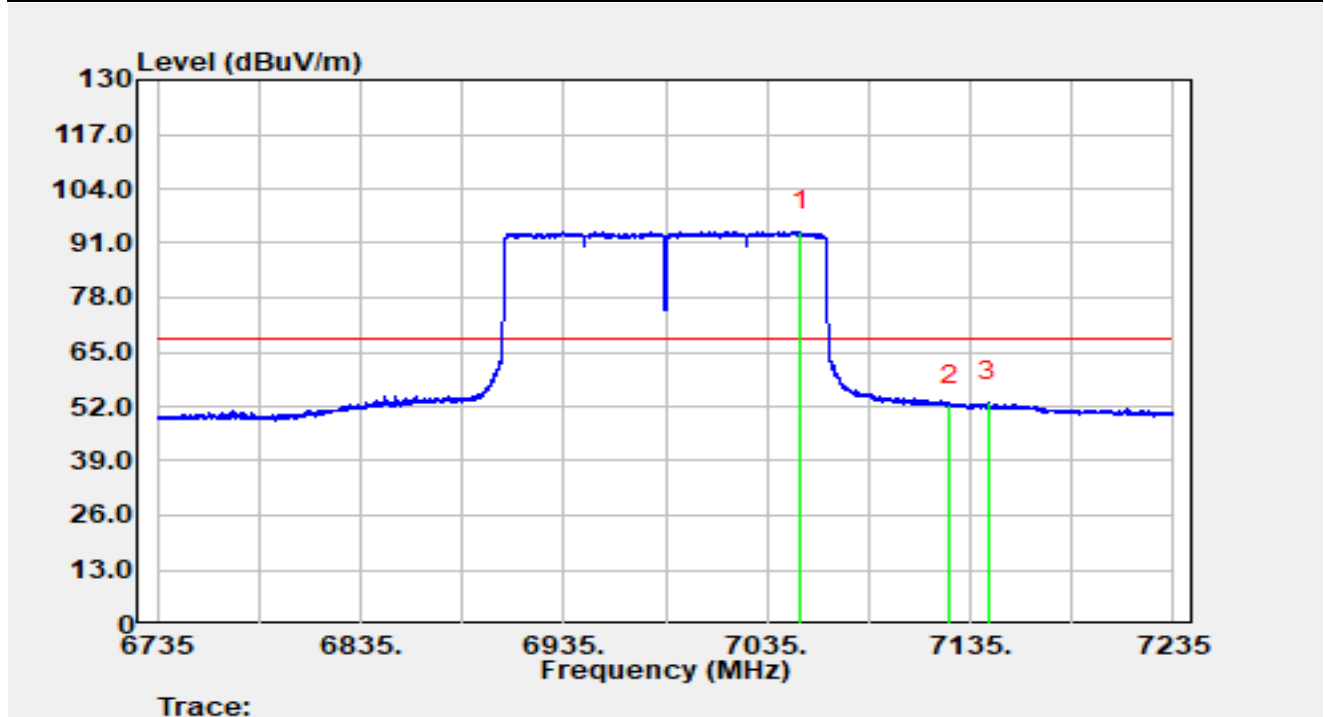


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7051.15	69.65	24.29	93.94	N/A	N/A	Average
2		7125.00	27.78	24.48	52.27	-15.93	68.20	Average
3	*	7143.75	28.31	24.71	53.02	-15.18	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

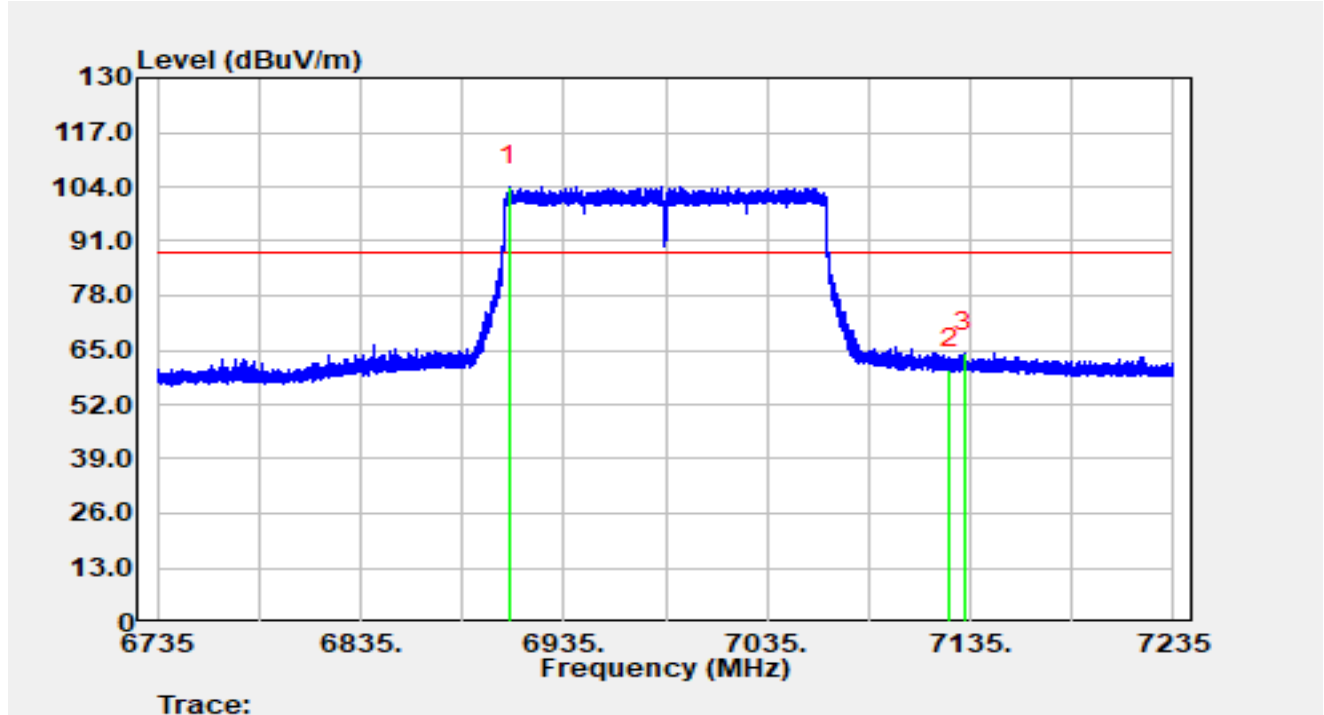


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6908.30	80.98	23.18	104.16	N/A	N/A	Peak
2		7125.00	35.97	24.48	60.45	-27.75	88.20	Peak
3	*	7132.35	39.89	24.56	64.45	-23.75	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

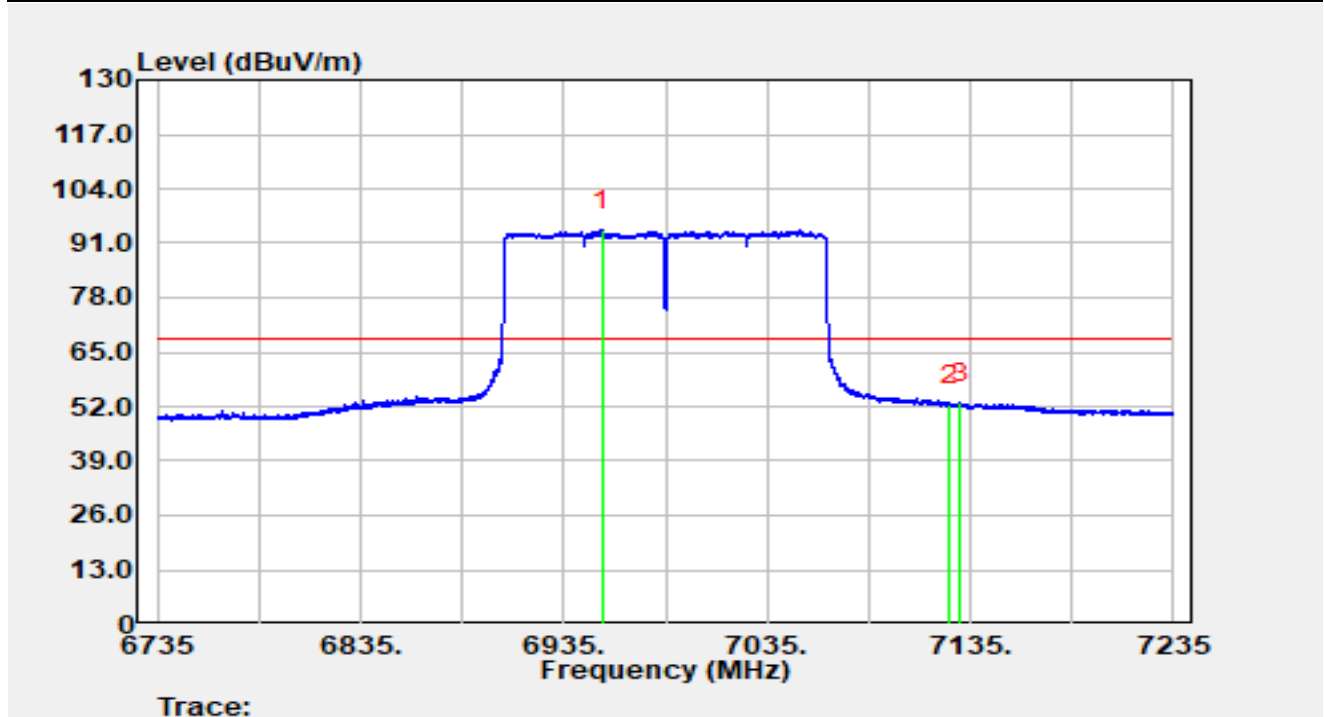


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6953.65	70.36	23.71	94.07	N/A	N/A	Average
2		7125.00	27.79	24.48	52.28	-15.92	68.20	Average
3	*	7130.00	28.37	24.52	52.89	-15.31	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz		

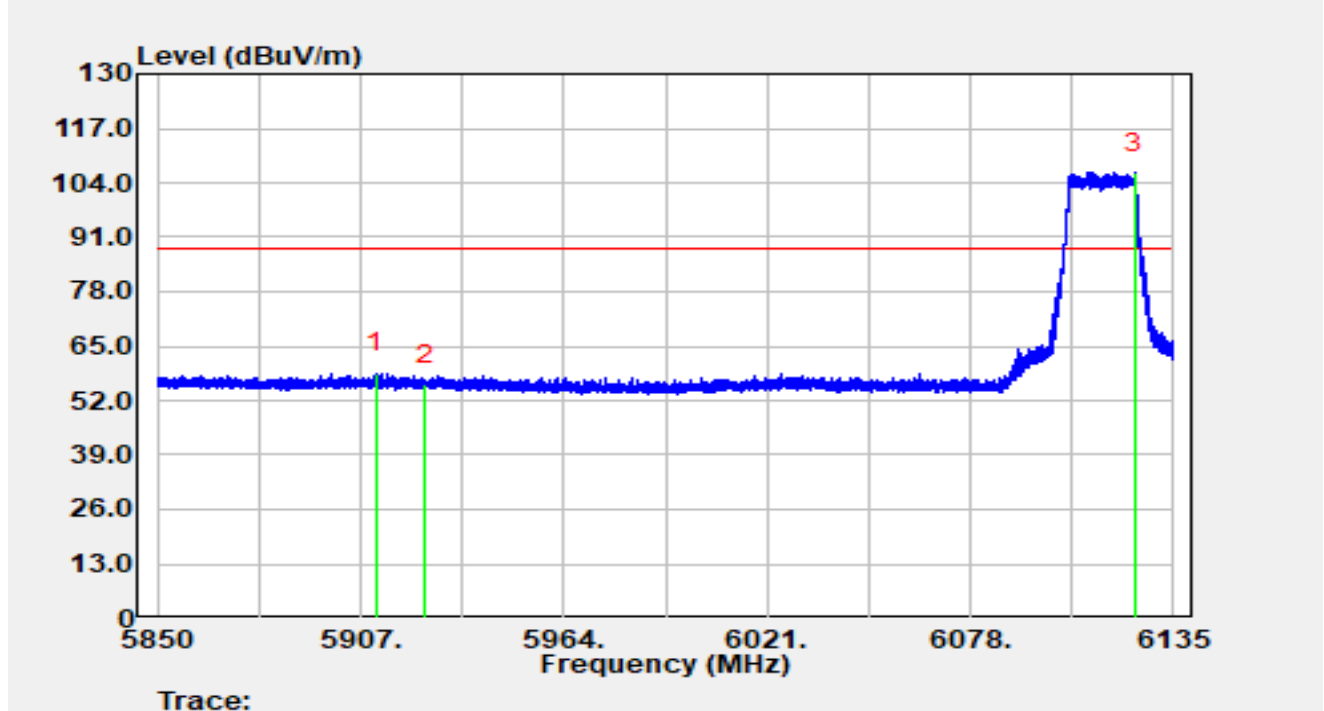


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5911.19	37.50	21.07	58.57	-29.63	88.20	Peak
2		5925.00	34.62	21.12	55.74	-32.46	88.20	Peak
3		6124.00	85.05	21.39	106.43	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz		

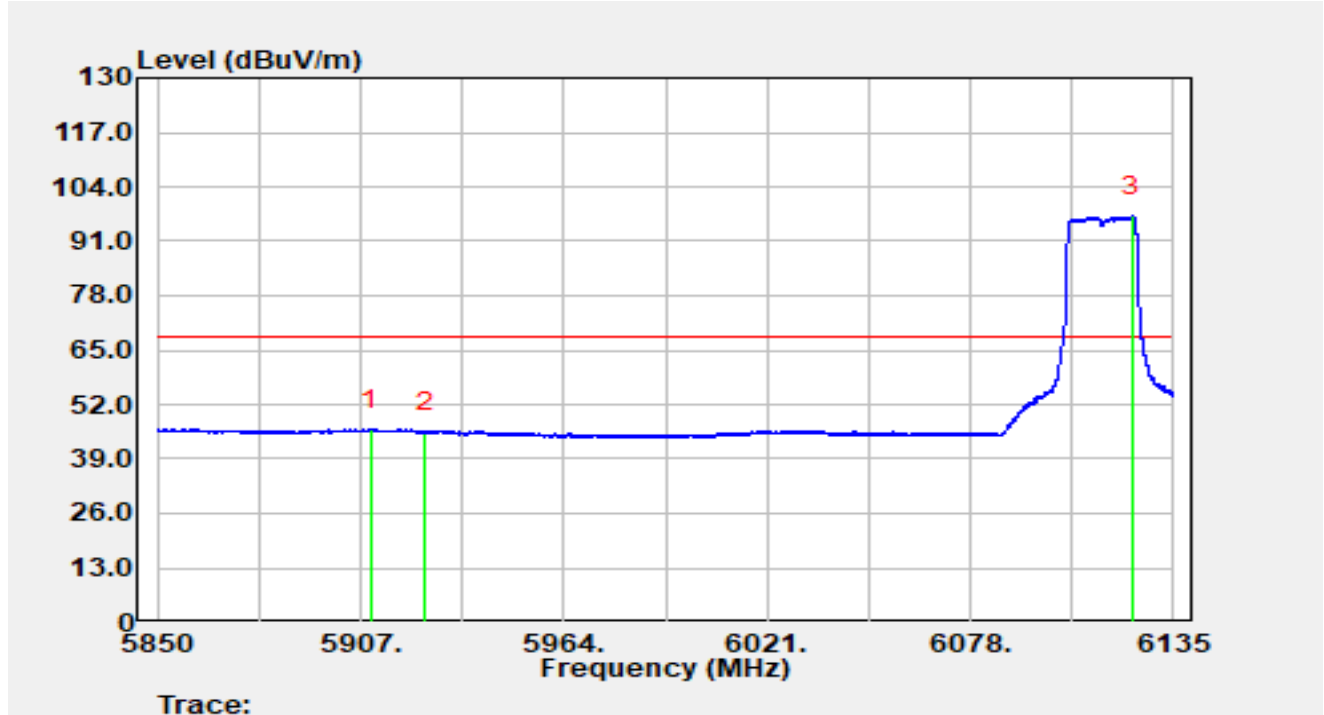


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5909.77	24.91	21.06	45.97	-22.23	68.20	Average
2		5925.00	24.25	21.12	45.37	-22.83	68.20	Average
3		6123.29	75.62	21.39	97.01	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz		

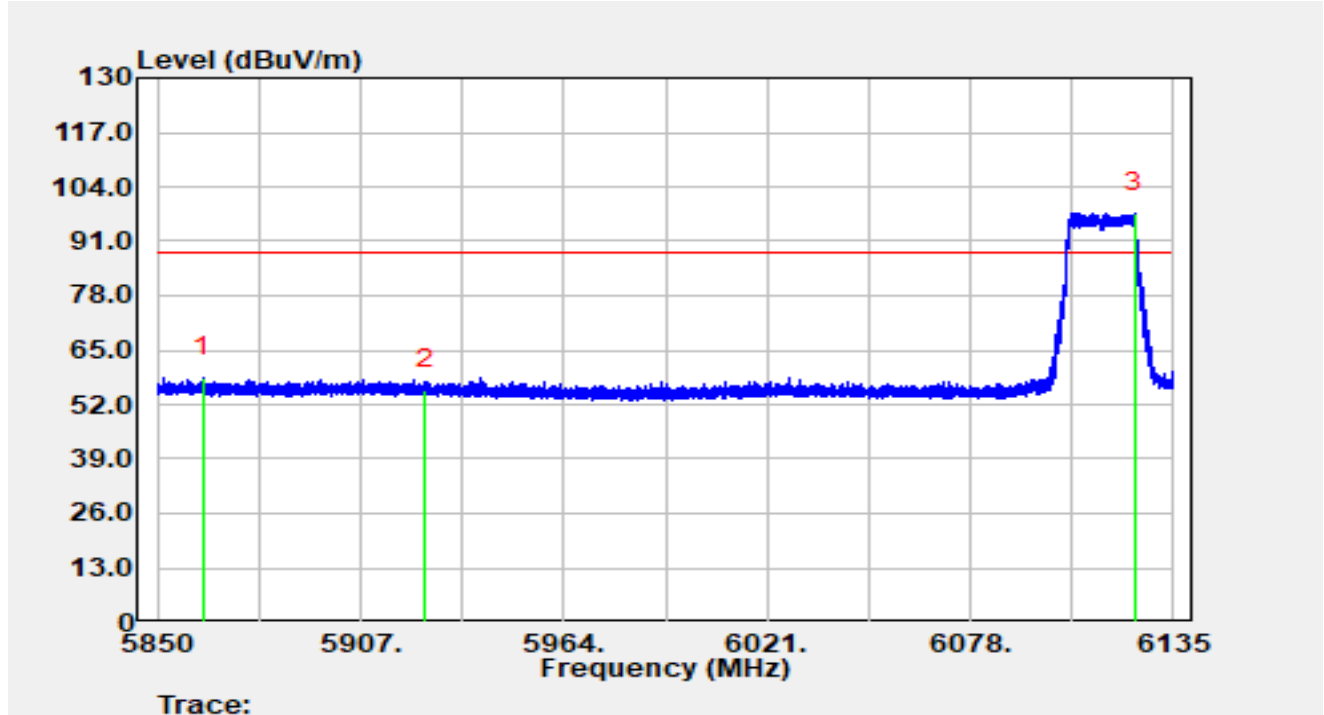


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5862.88	37.85	20.74	58.59	-29.61	88.20	Peak
2		5925.00	34.53	21.12	55.65	-32.55	88.20	Peak
3		6123.91	76.39	21.39	97.78	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz		

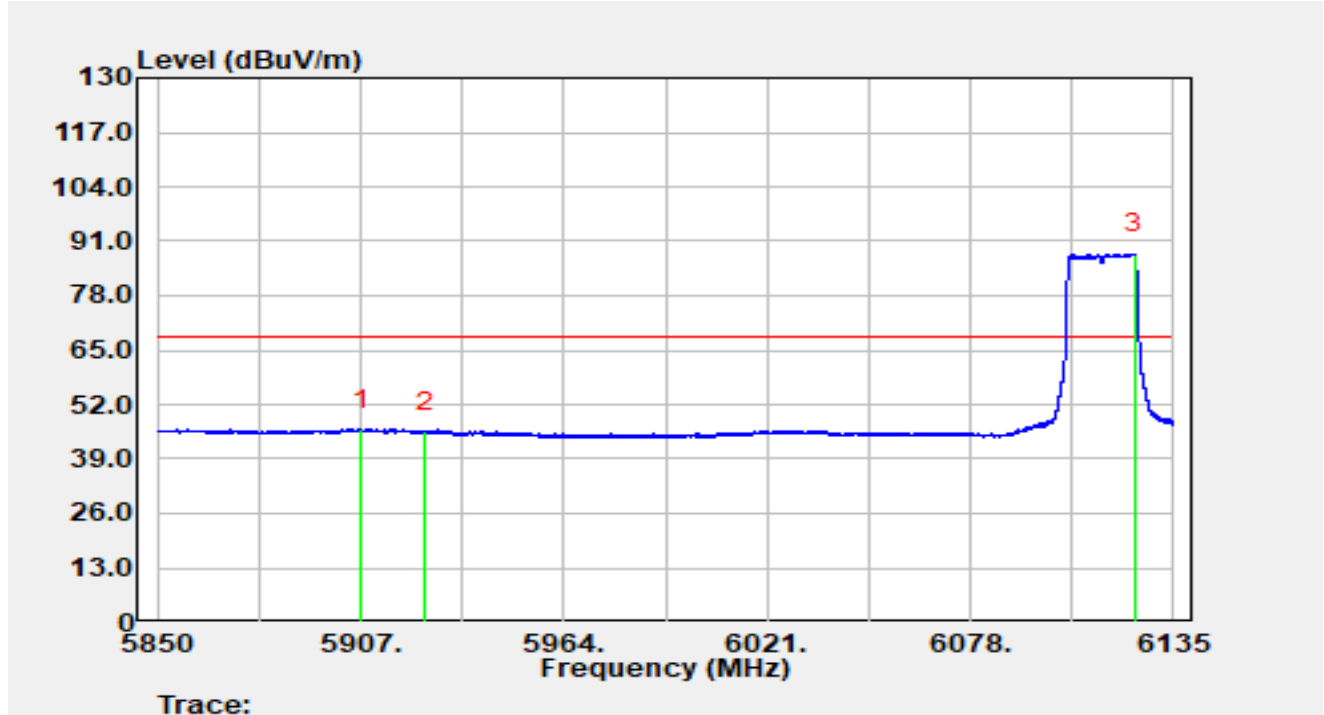


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5907.31	25.08	21.03	46.11	-22.09	68.20	Average
2		5925.00	24.43	21.12	45.55	-22.65	68.20	Average
3		6124.11	66.55	21.39	87.94	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

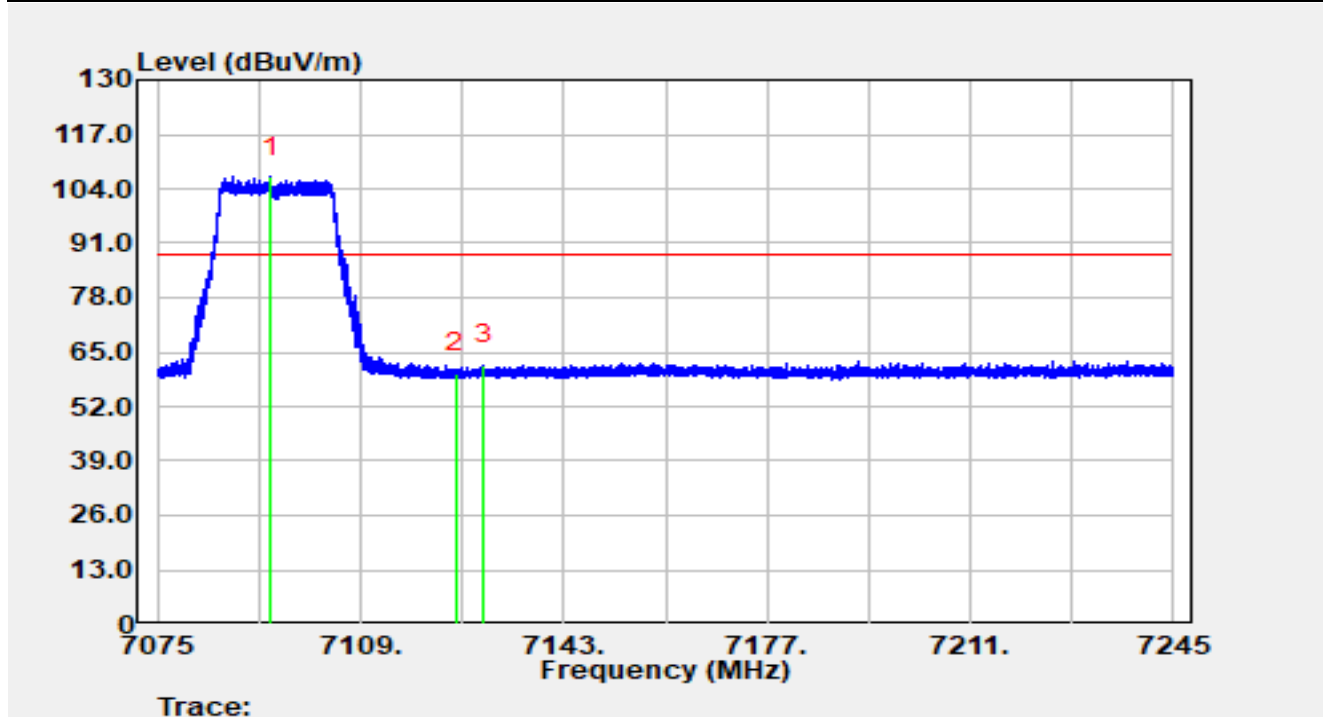


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7093.97	82.86	24.08	106.94	N/A	N/A	Peak
2		7125.00	35.59	24.48	60.07	-28.13	88.20	Peak
3	*	7129.50	37.42	24.52	61.94	-26.26	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

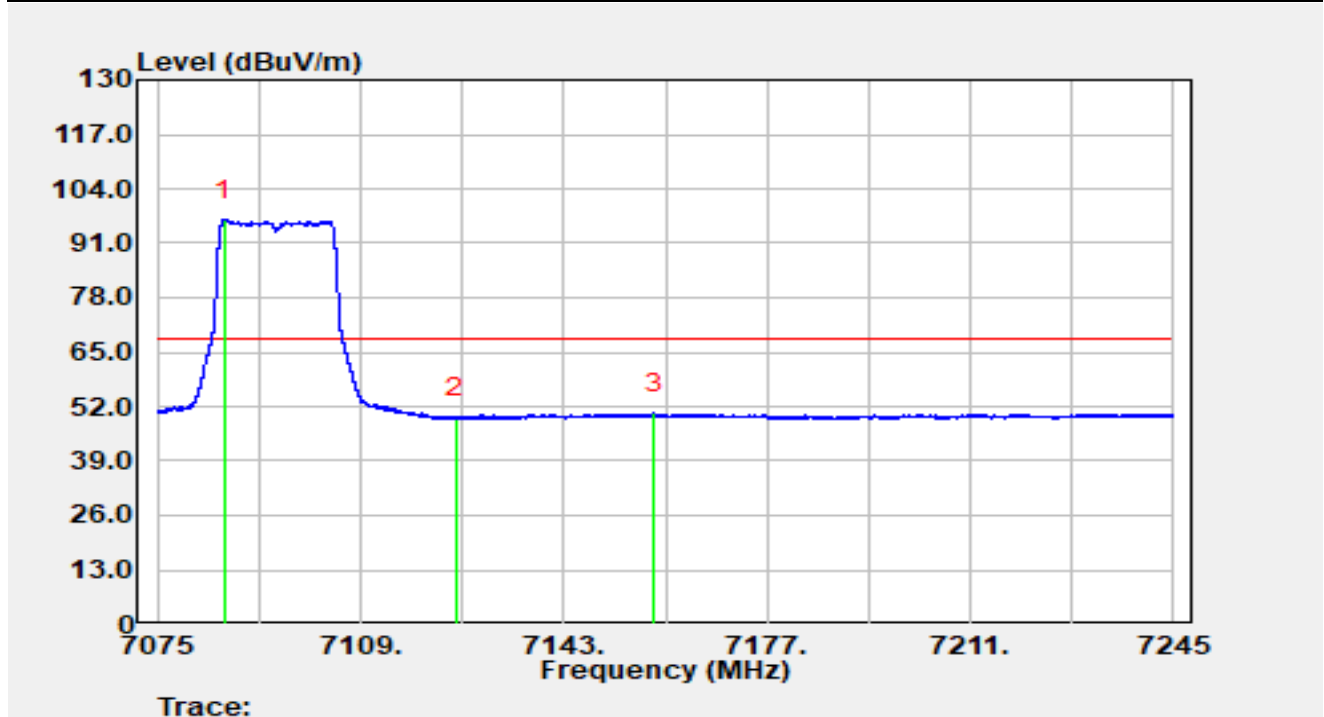


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7086.29	72.47	24.06	96.53	N/A	N/A	Average
2		7125.00	24.70	24.48	49.18	-19.02	68.20	Average
3	*	7158.06	25.58	24.75	50.33	-17.87	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

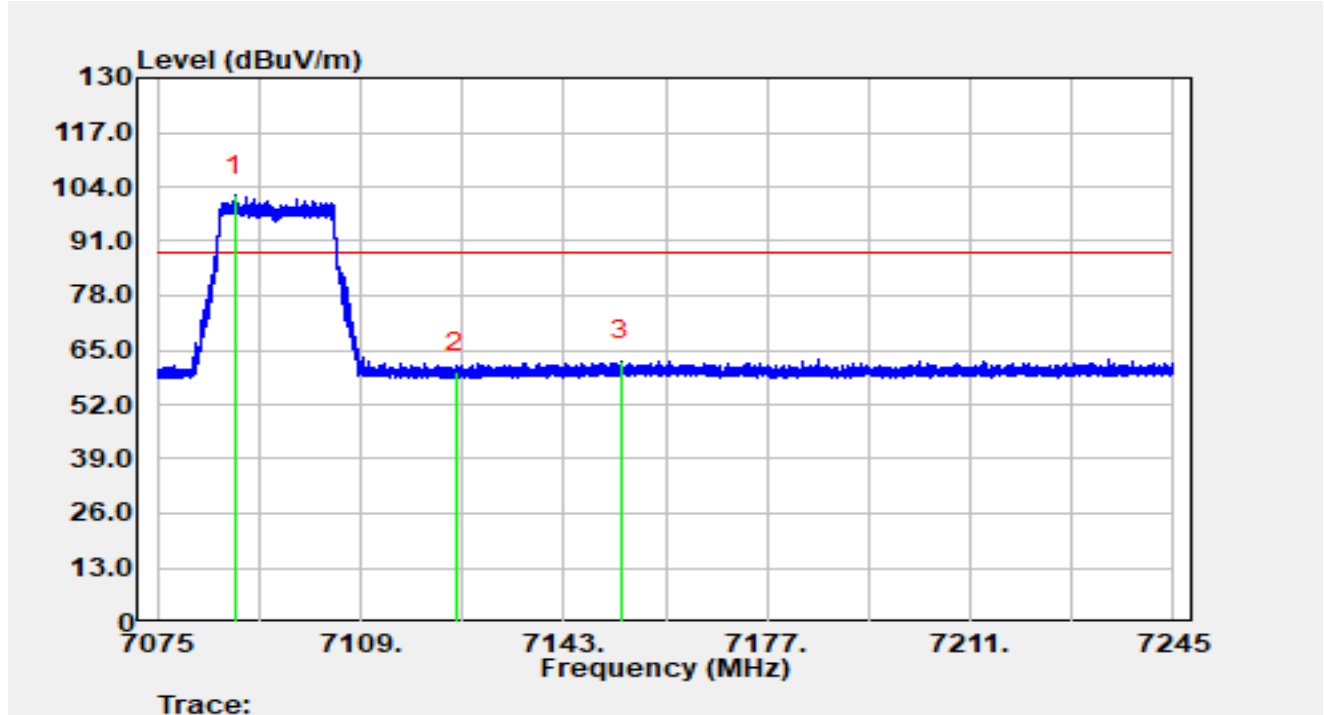


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.97	77.81	24.06	101.88	N/A	N/A	Peak
2		7125.00	35.22	24.48	59.71	-28.49	88.20	Peak
3	*	7152.62	37.62	24.79	62.41	-25.79	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

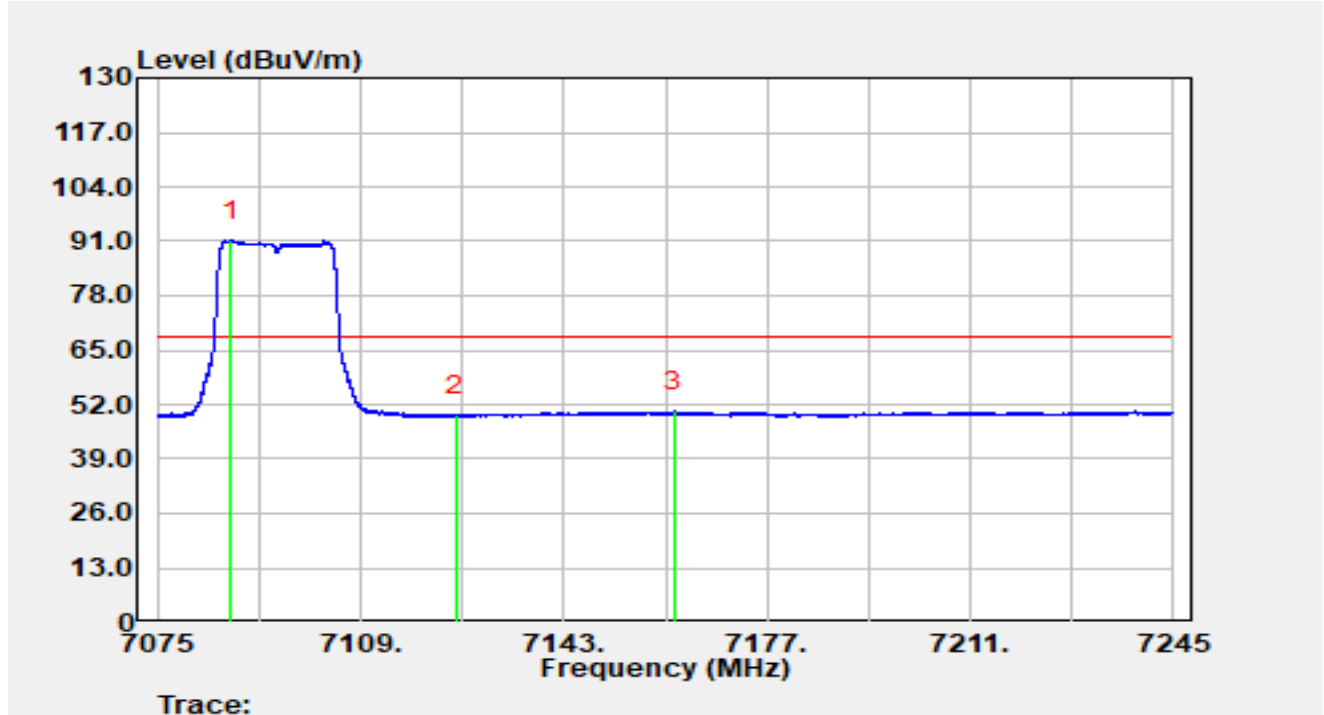


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.26	67.13	24.06	91.19	N/A	N/A	Average
2		7125.00	24.89	24.48	49.37	-18.83	68.20	Average
3	*	7161.50	25.64	24.71	50.35	-17.85	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz		

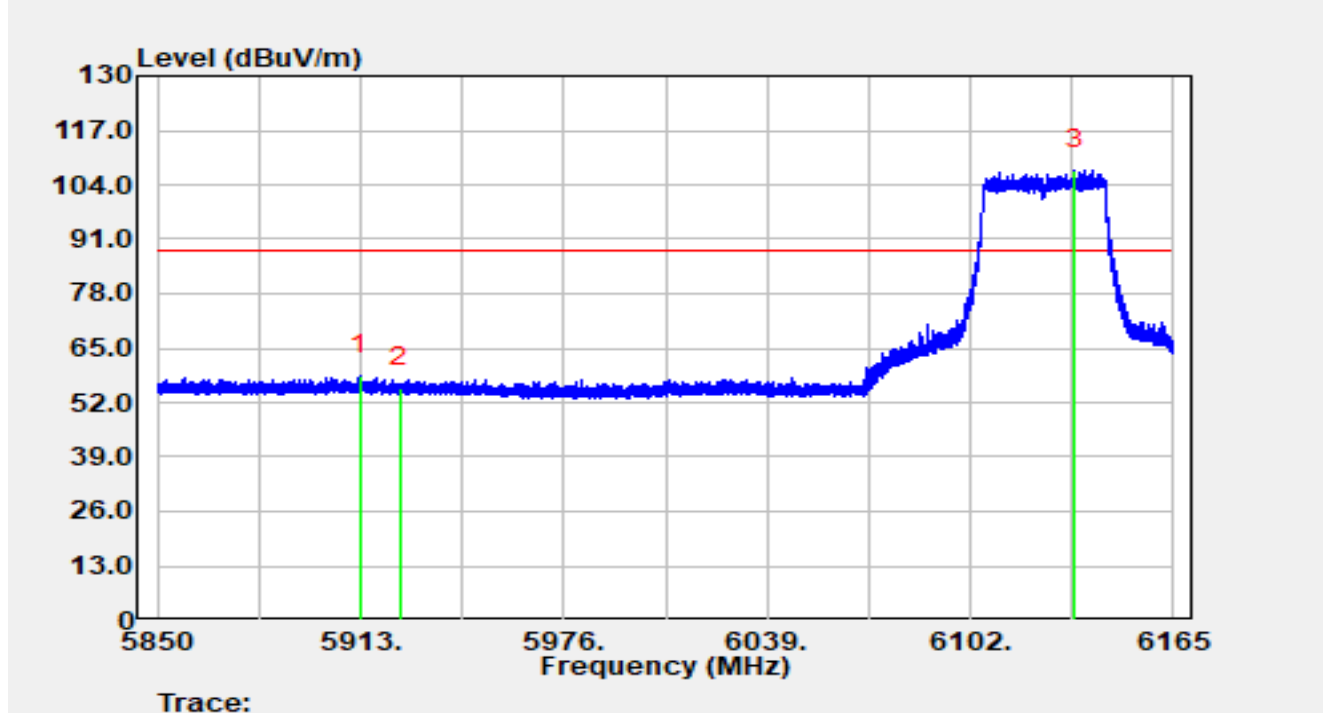


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5912.62	37.42	21.08	58.51	-29.69	88.20	Peak
2		5925.00	34.47	21.12	55.59	-32.61	88.20	Peak
3		6134.32	86.11	21.38	107.48	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz		

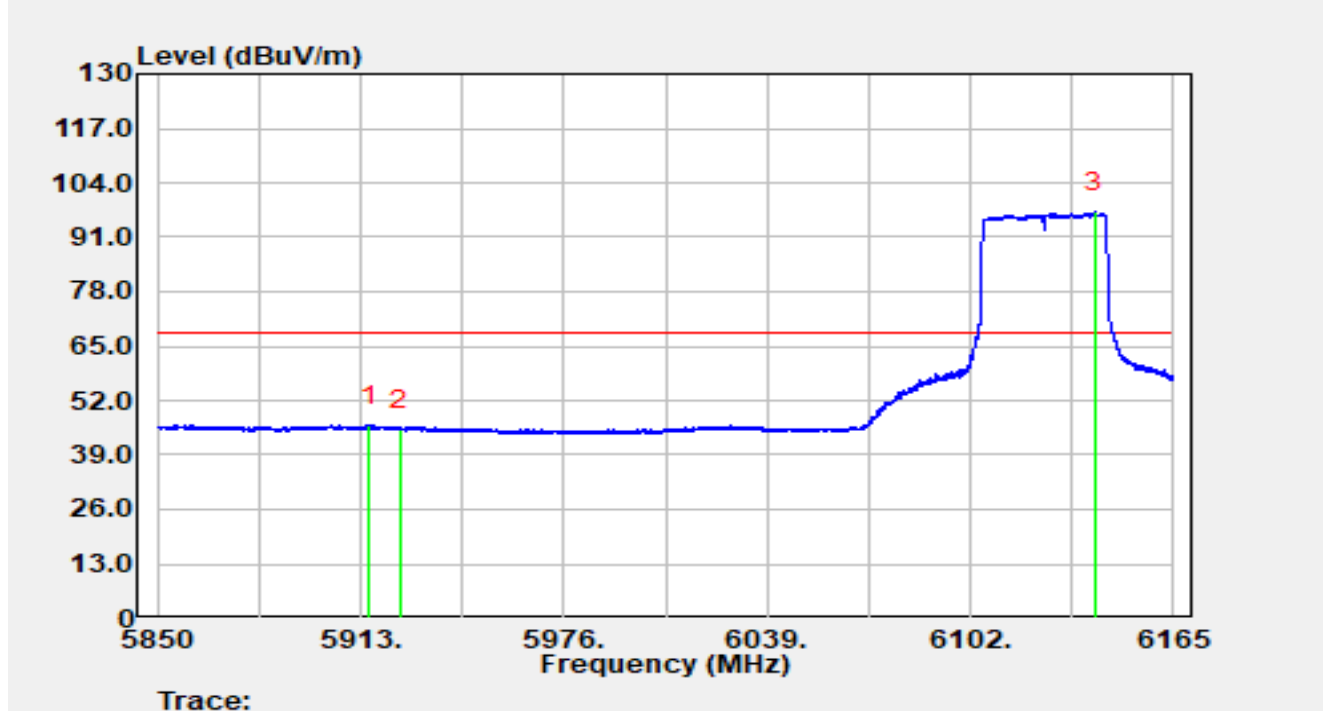


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.52	24.98	21.10	46.08	-22.12	68.20	Average
2		5925.00	23.87	21.12	44.99	-23.21	68.20	Average
3		6140.59	75.58	21.33	96.91	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz		

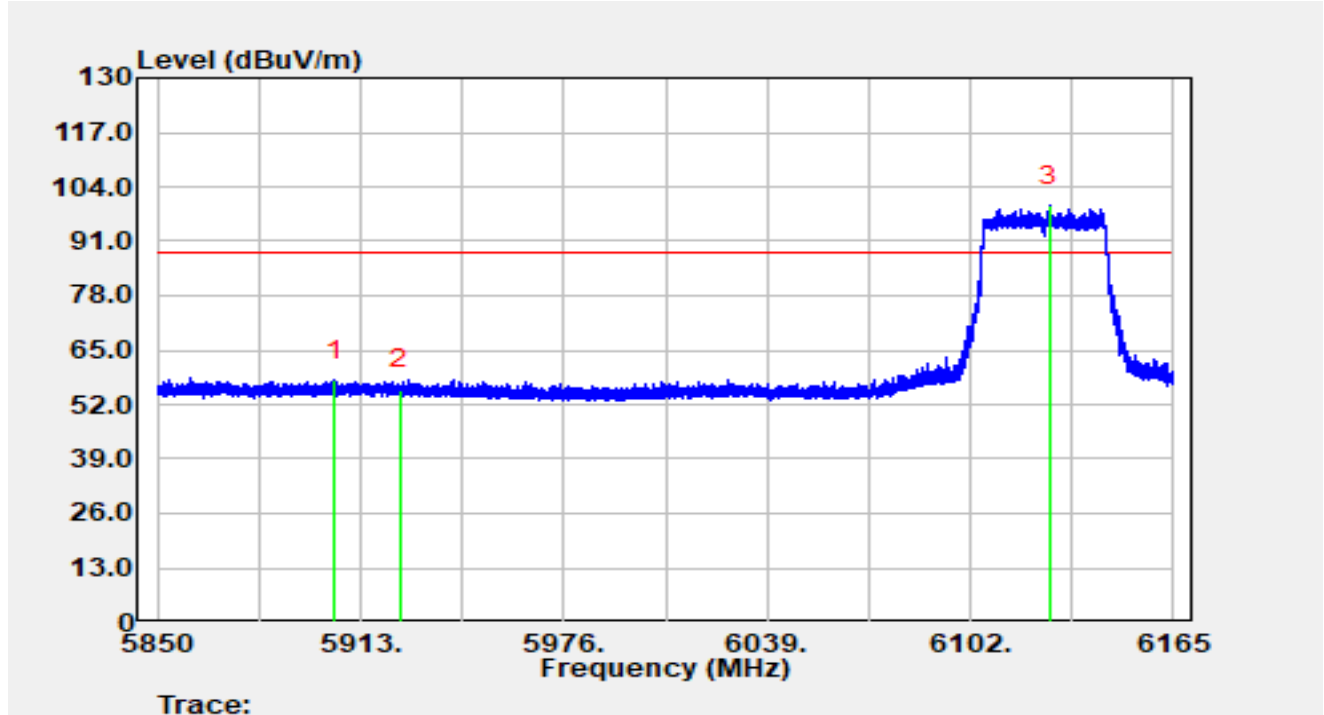


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5905.06	36.74	21.01	57.75	-30.45	88.20	Peak
2		5925.00	34.41	21.12	55.53	-32.67	88.20	Peak
3		6126.67	77.96	21.38	99.34	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz		

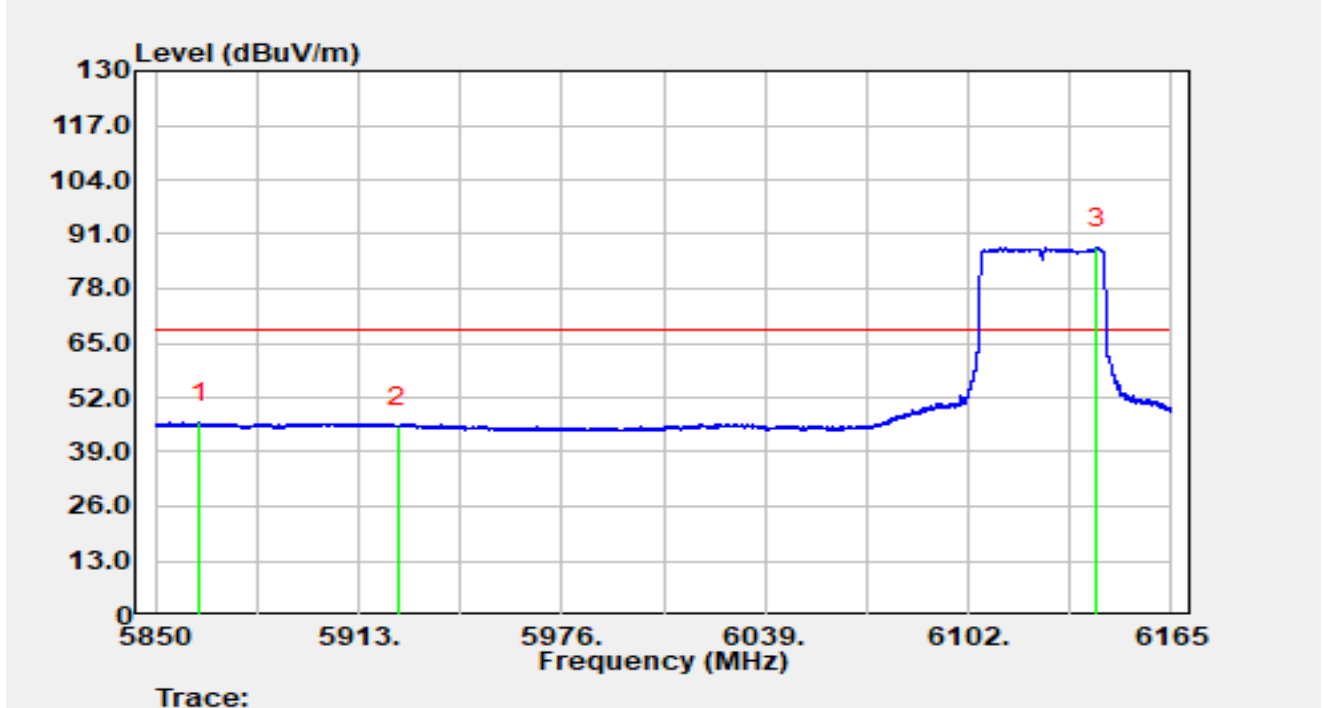


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5863.70	25.19	20.75	45.93	-22.27	68.20	Average
2		5925.00	23.88	21.12	45.00	-23.20	68.20	Average
3		6141.91	66.46	21.32	87.78	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

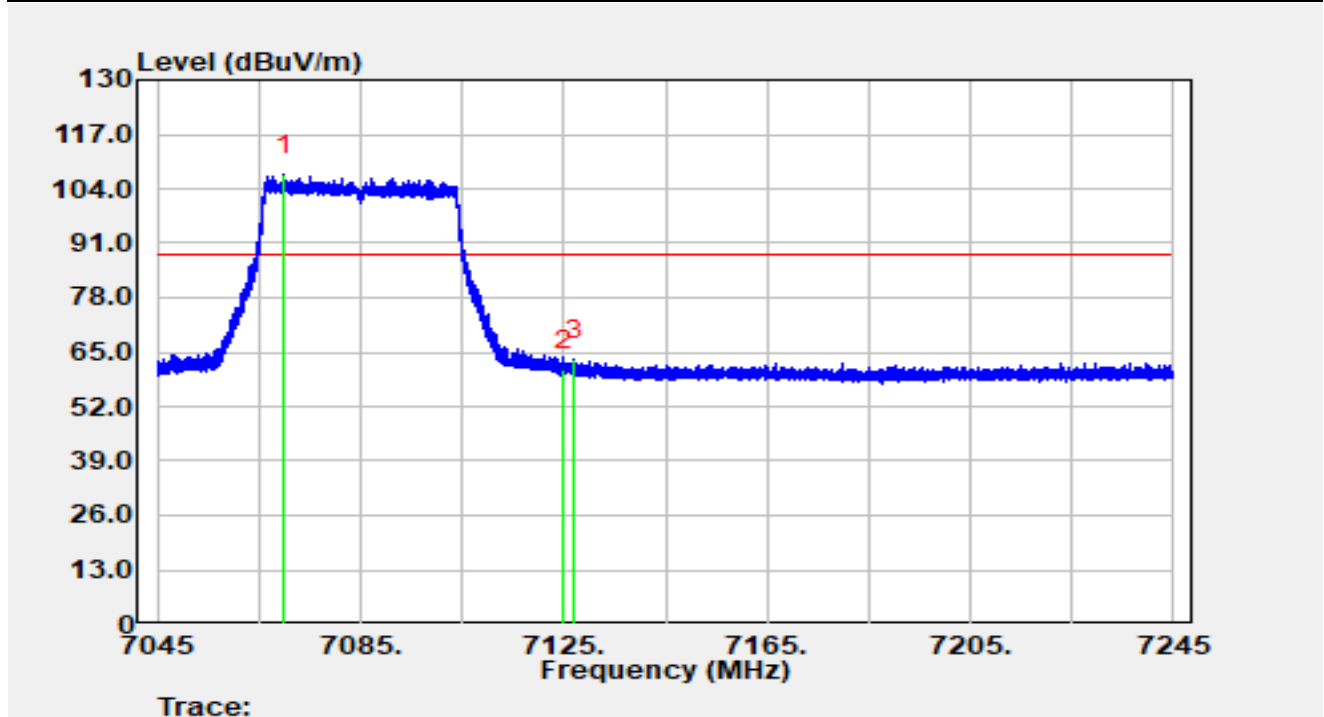


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7069.94	83.16	24.12	107.29	N/A	N/A	Peak
2		7125.00	36.10	24.48	60.59	-27.61	88.20	Peak
3	*	7127.14	38.67	24.49	63.16	-25.04	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

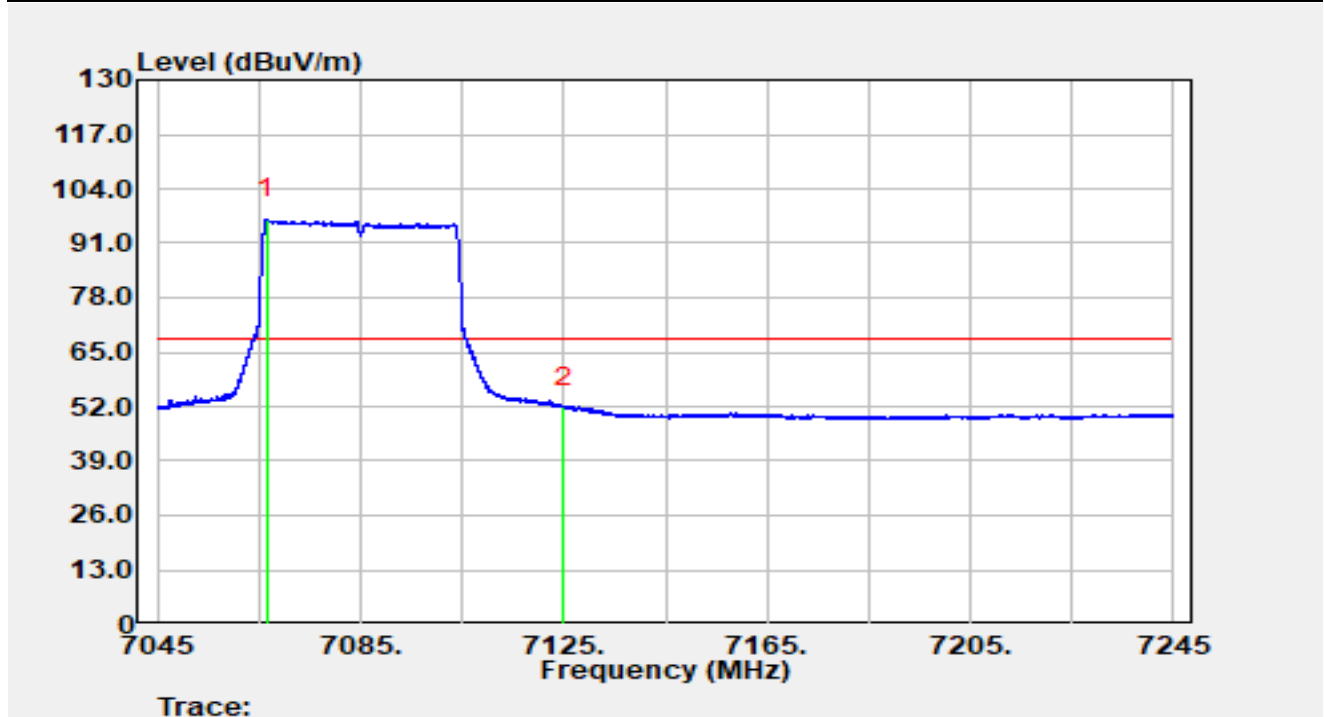


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7066.44	72.60	24.16	96.76	N/A	N/A	Average
2	*	7125.00	27.41	24.48	51.89	-16.31	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

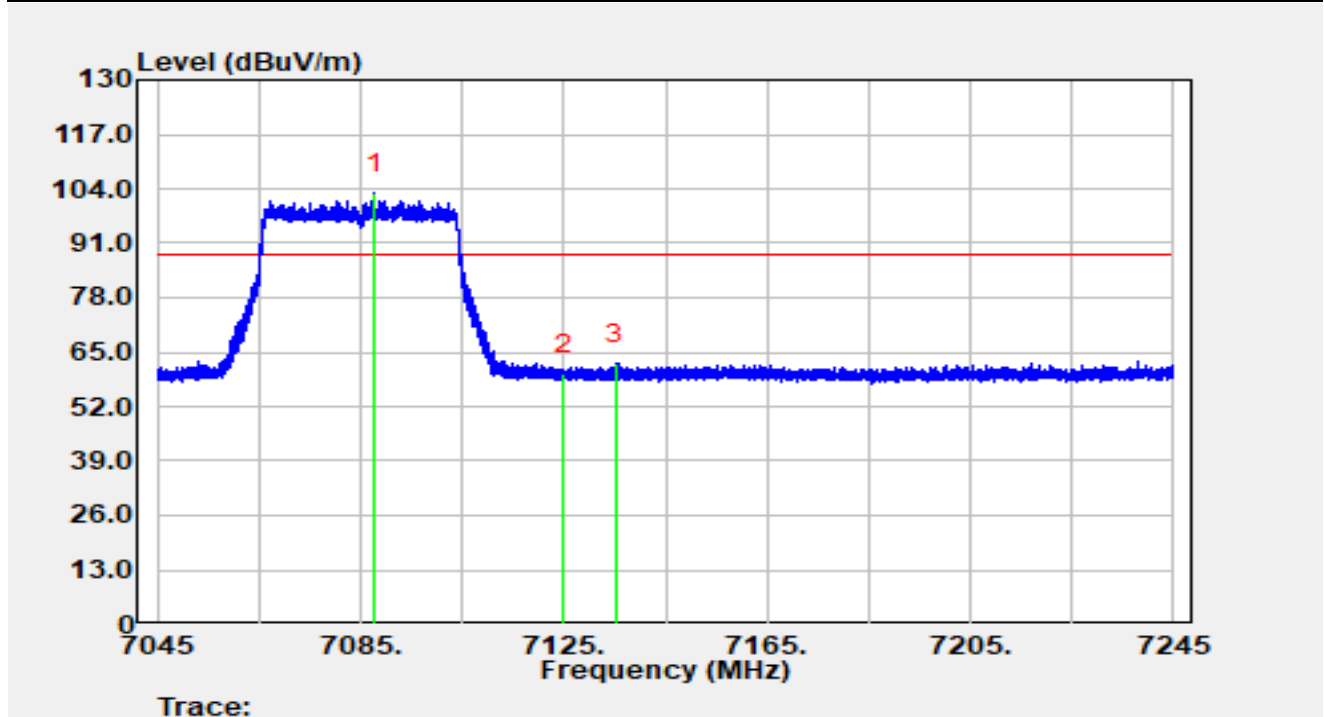


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.70	78.73	24.06	102.79	N/A	N/A	Peak
2		7125.00	35.19	24.48	59.67	-28.53	88.20	Peak
3	*	7135.18	37.54	24.60	62.14	-26.06	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

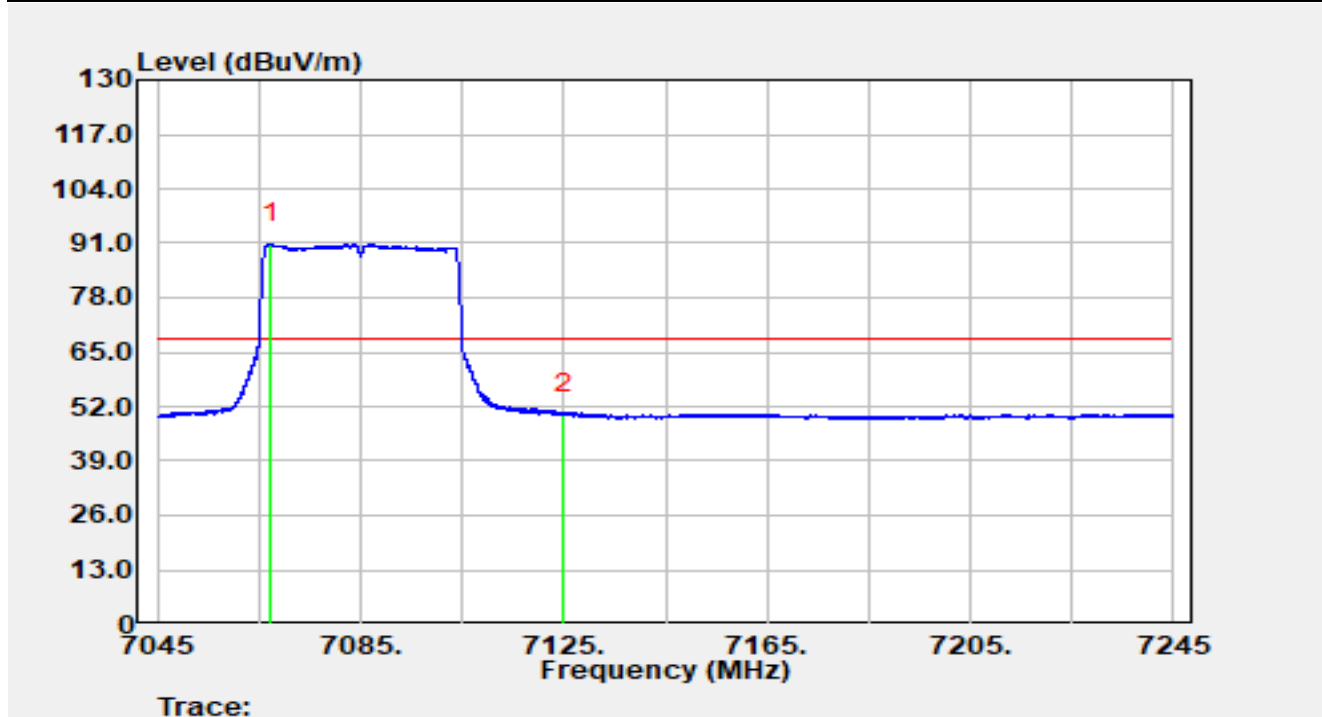


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7067.32	66.68	24.15	90.83	N/A	N/A	Average
2	*	7125.00	25.79	24.48	50.28	-17.92	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz		

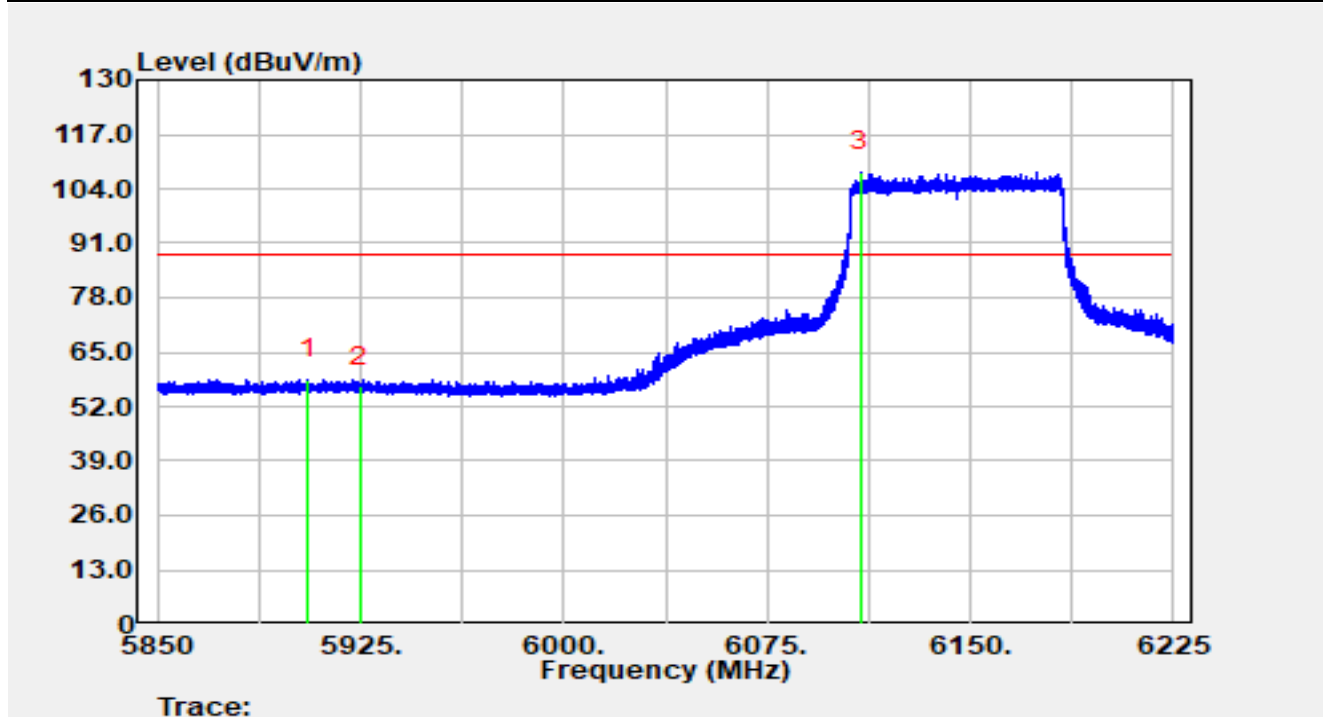


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5905.46	37.59	21.02	58.60	-29.60	88.20	Peak
2		5925.00	35.64	21.12	56.76	-31.44	88.20	Peak
3		6109.61	86.81	21.22	108.03	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz		

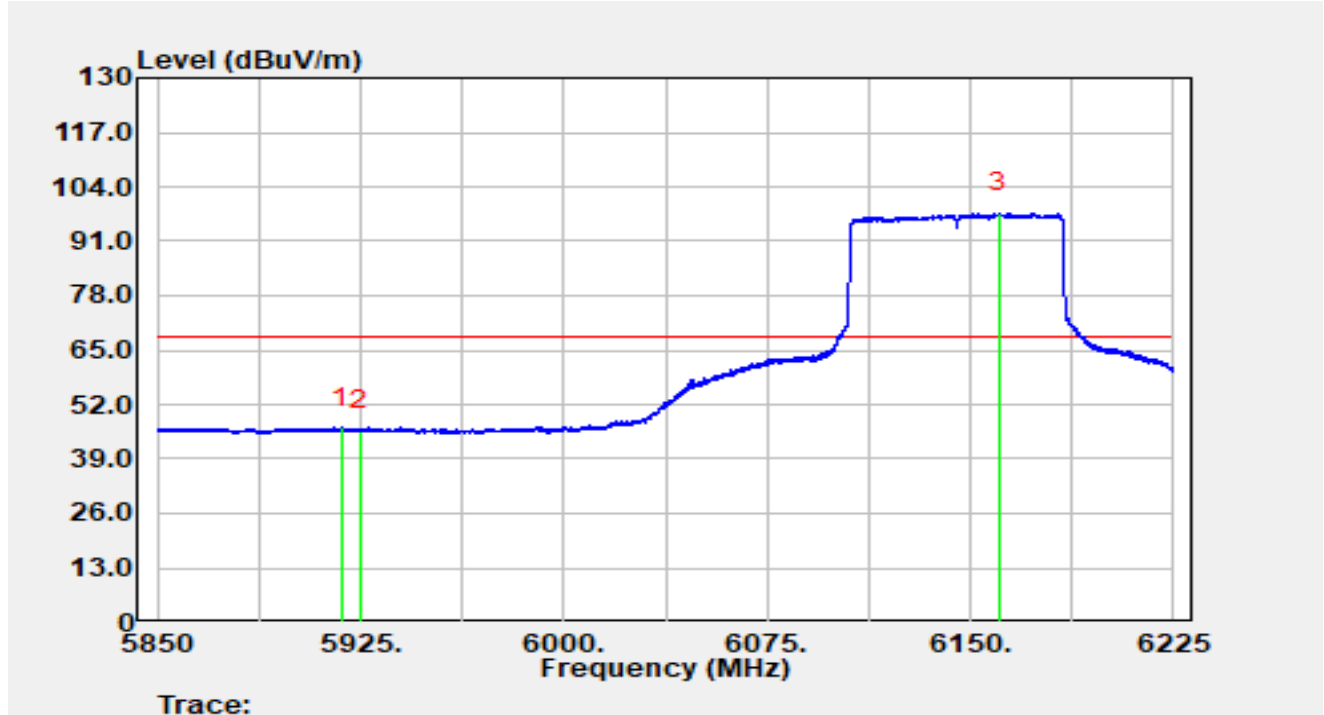


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.84	25.30	21.10	46.40	-21.80	68.20	Average
2		5925.00	24.65	21.12	45.77	-22.43	68.20	Average
3		6160.58	76.54	21.17	97.71	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz		

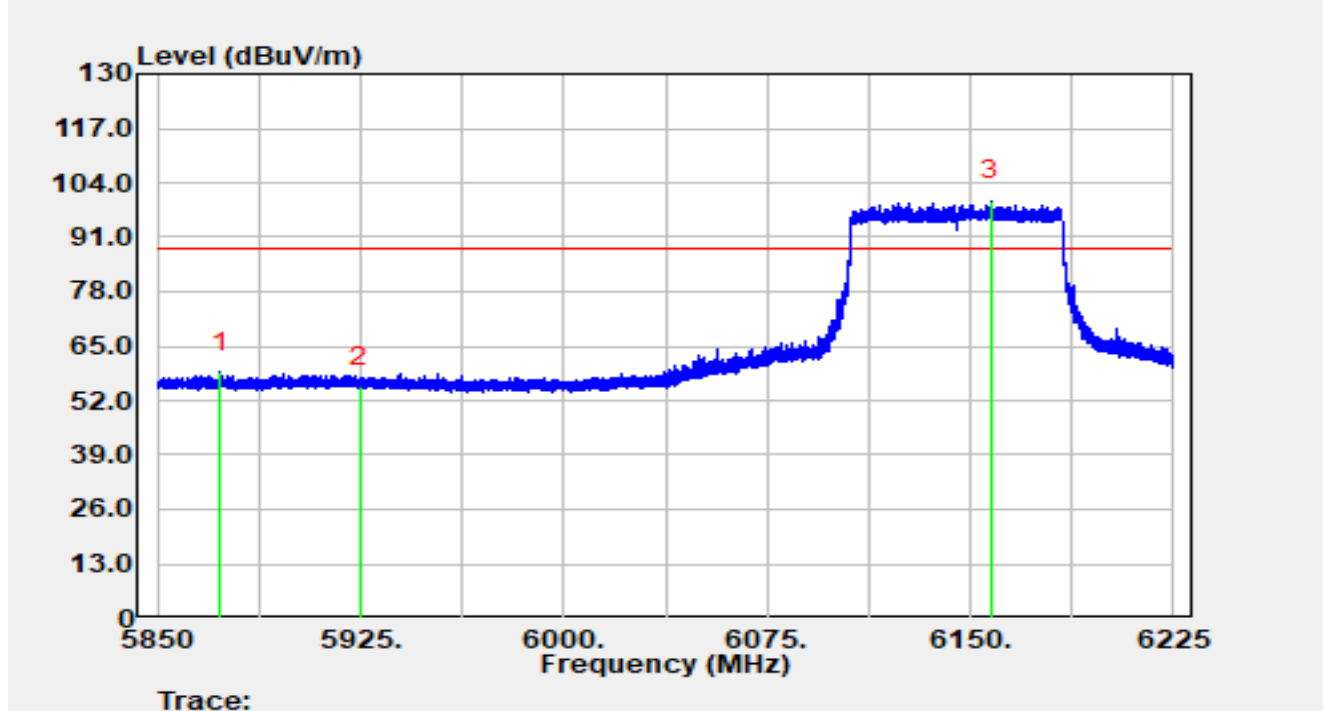


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5873.25	37.93	20.78	58.71	-29.49	88.20	Peak
2		5925.00	34.14	21.12	55.26	-32.94	88.20	Peak
3		6157.80	78.50	21.19	99.69	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz		

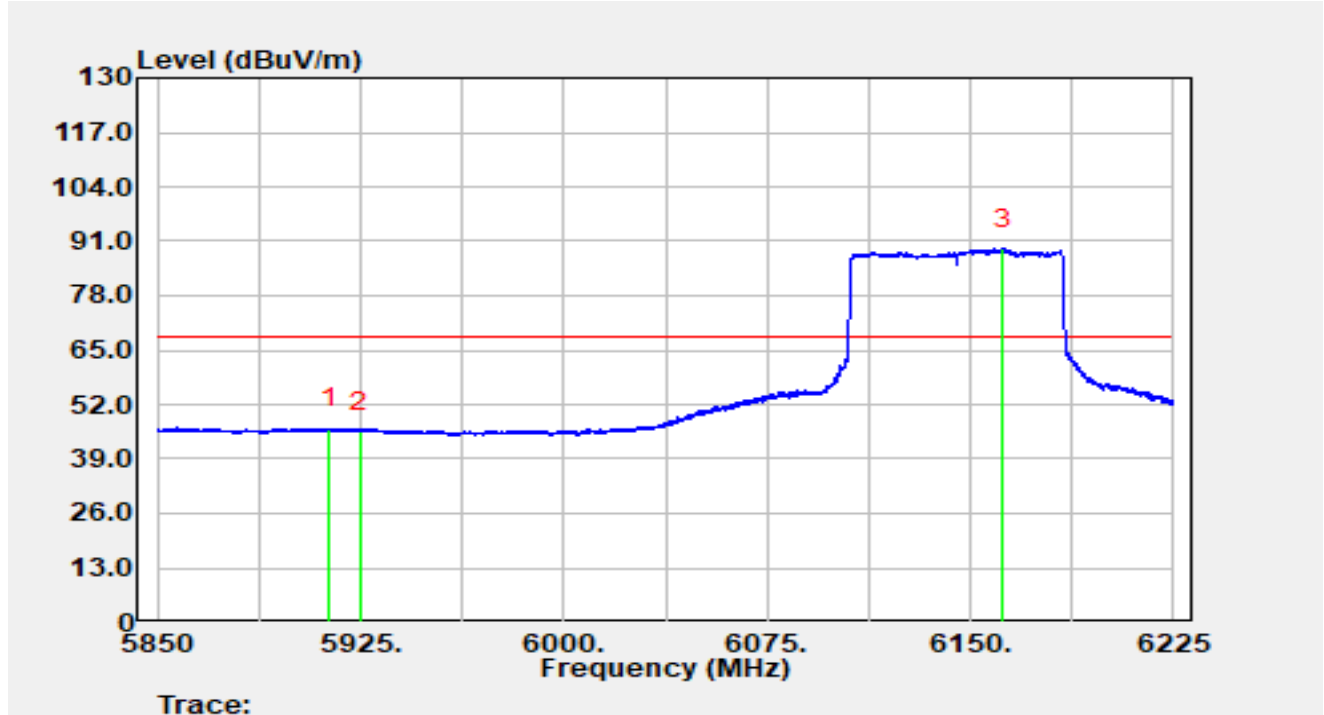


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.60	25.19	21.09	46.28	-21.92	68.20	Average
2		5925.00	24.46	21.12	45.58	-22.62	68.20	Average
3		6161.93	68.02	21.16	89.18	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

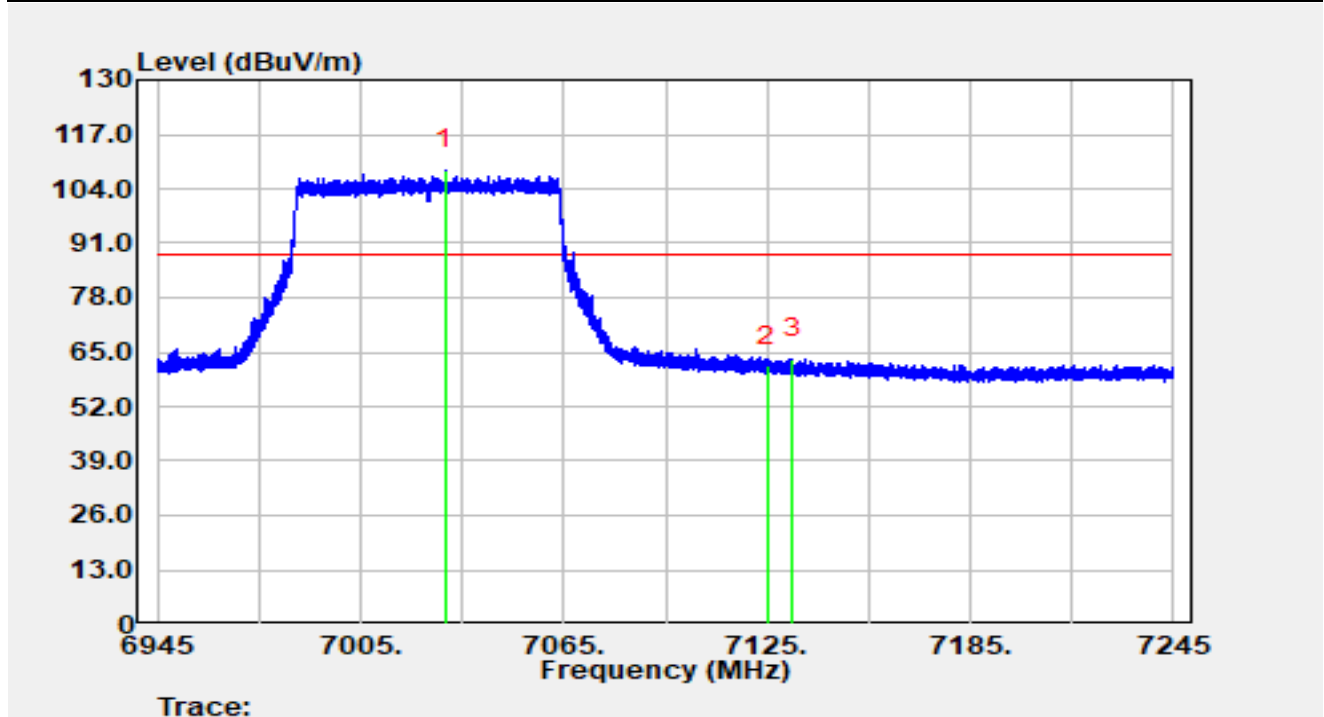


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7030.14	84.50	24.03	108.53	N/A	N/A	Peak
2		7125.00	37.22	24.48	61.70	-26.50	88.20	Peak
3	*	7132.71	38.87	24.57	63.43	-24.77	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

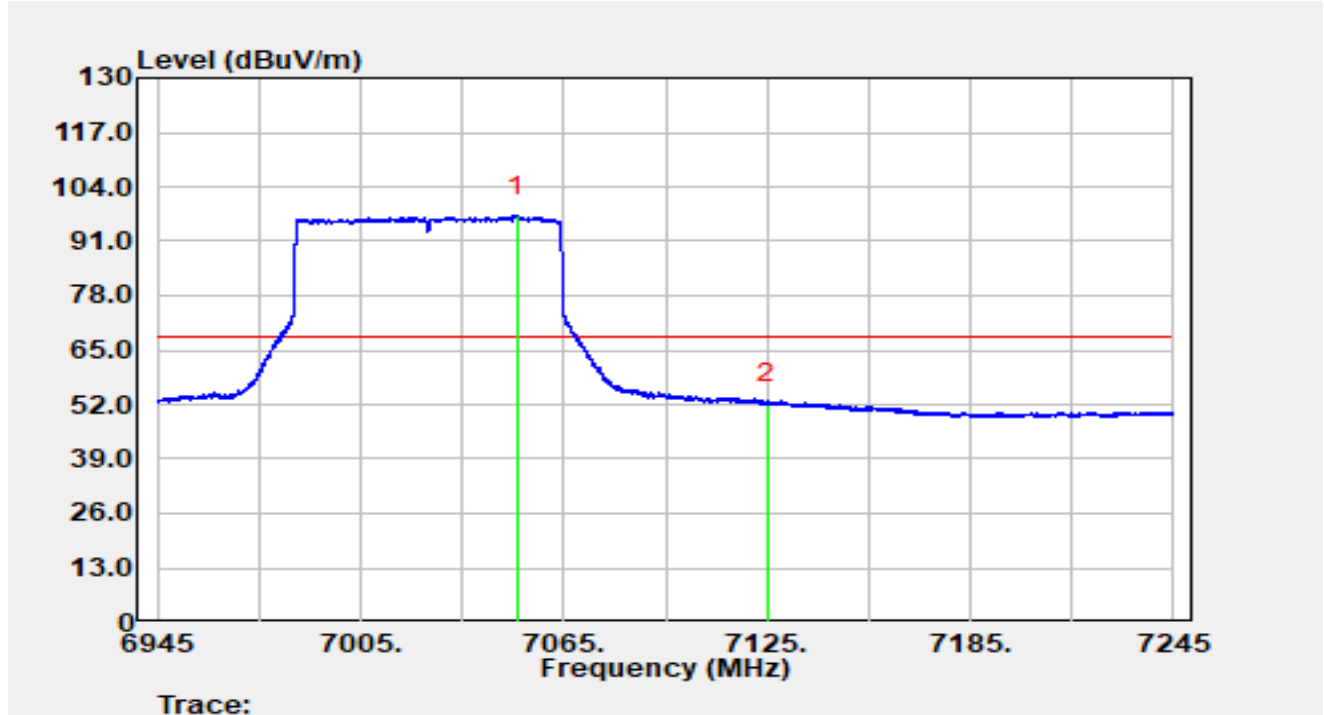


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7051.08	72.66	24.29	96.95	N/A	N/A	Average
2	*	7125.00	27.72	24.48	52.20	-16.00	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

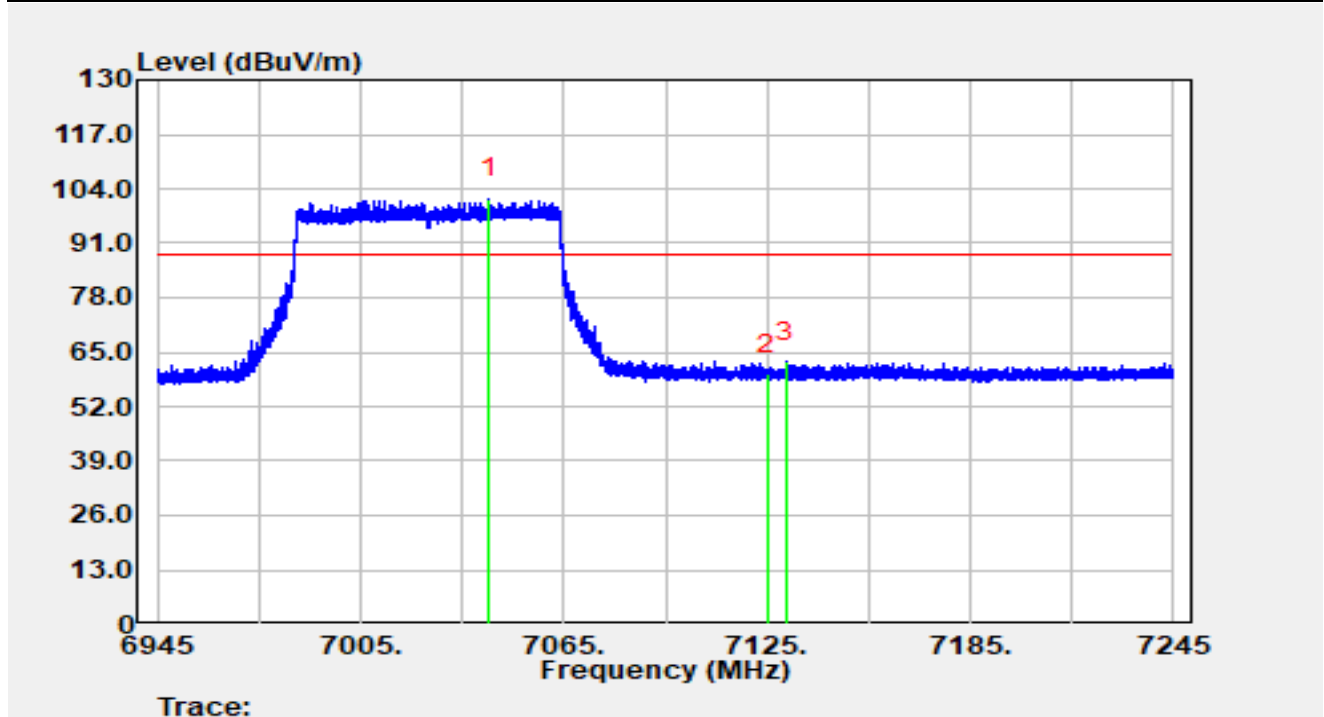


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7042.77	77.37	24.22	101.60	N/A	N/A	Peak
2		7125.00	35.25	24.48	59.73	-28.47	88.20	Peak
3	*	7130.52	38.20	24.53	62.73	-25.47	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

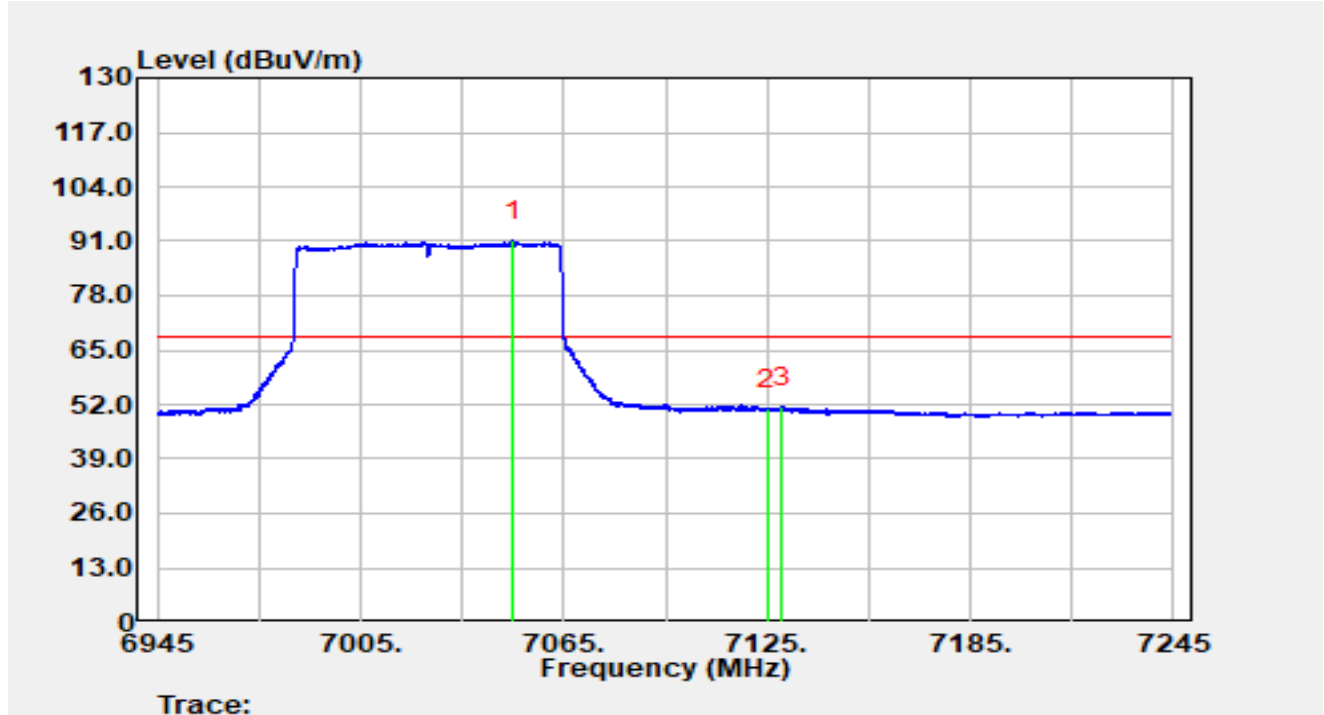


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7049.97	66.77	24.28	91.05	N/A	N/A	Average
2		7125.00	26.31	24.48	50.80	-17.40	68.20	Average
3	*	7129.41	26.79	24.51	51.31	-16.89	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz		

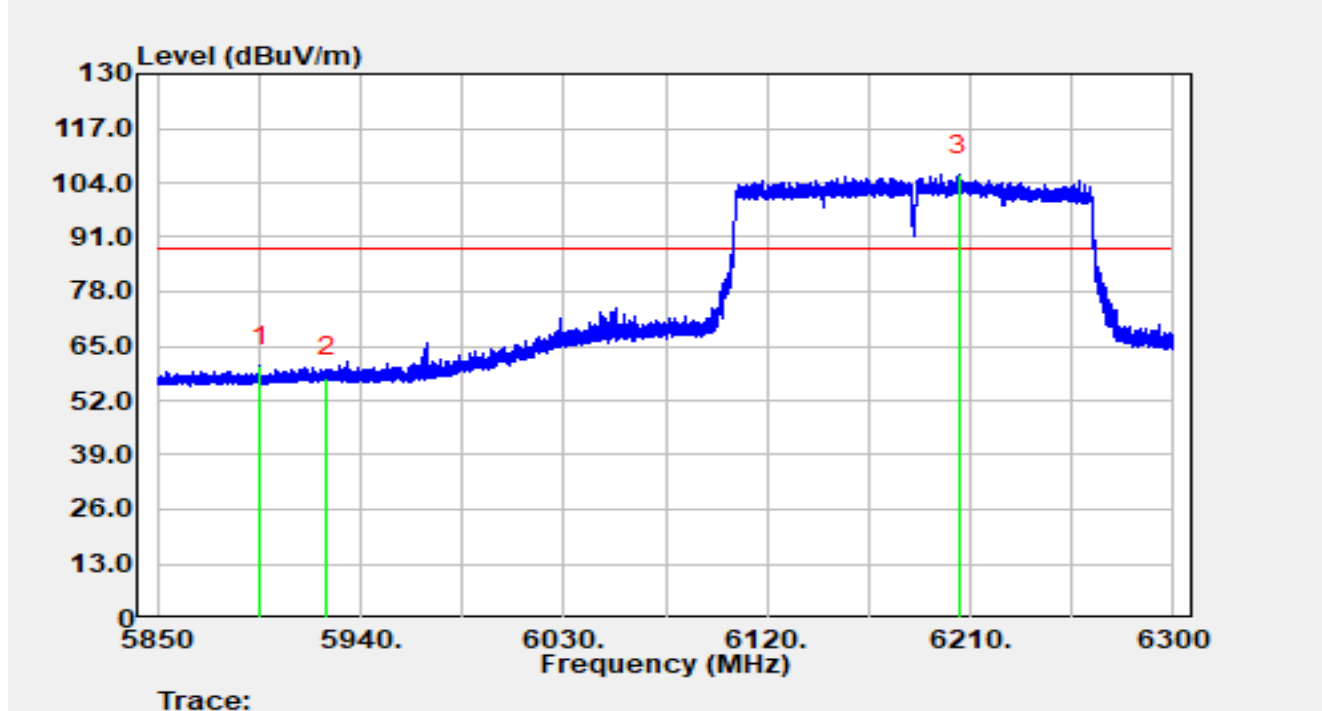


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5895.54	39.17	20.93	60.10	-28.10	88.20	Peak
2		5925.00	36.45	21.12	57.57	-30.63	88.20	Peak
3		6204.69	84.46	21.39	105.85	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz		

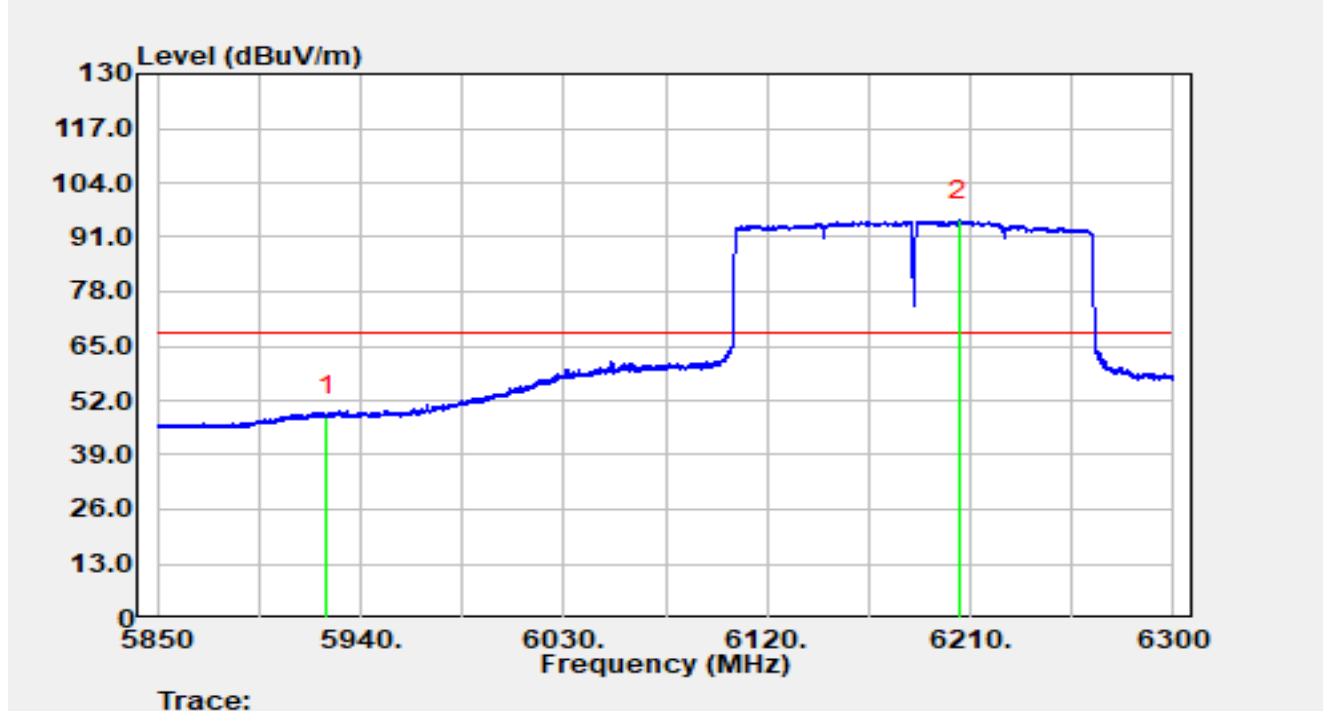


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.16	21.12	48.28	-19.92	68.20	Average
2		6205.14	73.54	21.40	94.94	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz		

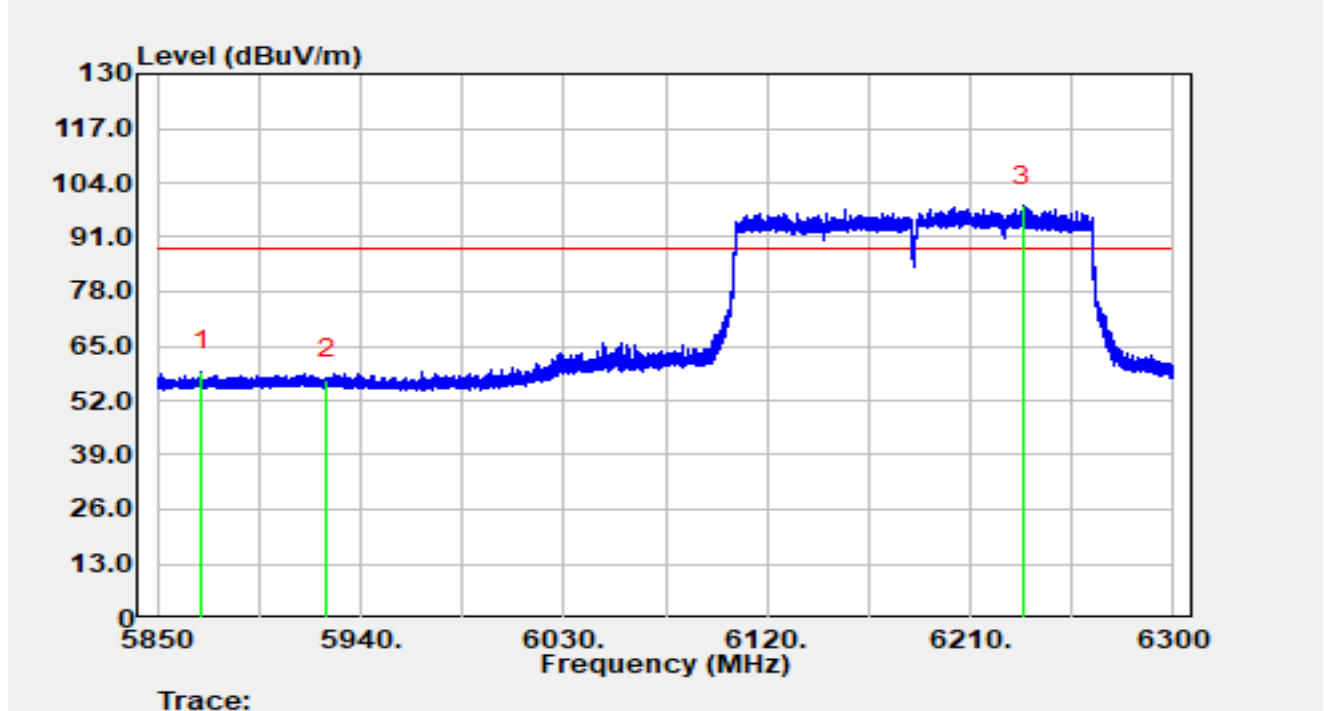


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5869.49	38.19	20.78	58.97	-29.23	88.20	Peak
2		5925.00	35.82	21.12	56.94	-31.26	88.20	Peak
3		6233.04	76.72	21.71	98.42	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz		

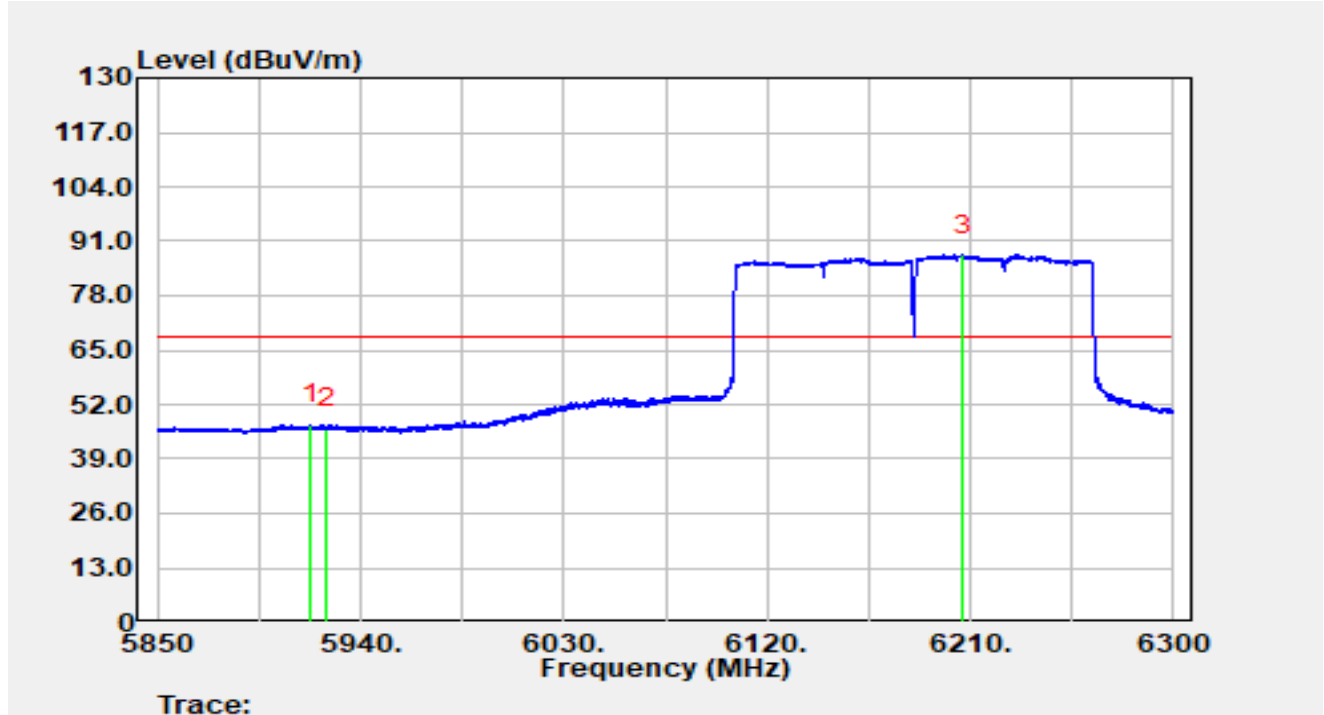


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.95	26.17	21.10	47.27	-20.93	68.20	Average
2		5925.00	25.06	21.12	46.18	-22.02	68.20	Average
3		6206.90	66.24	21.45	87.69	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

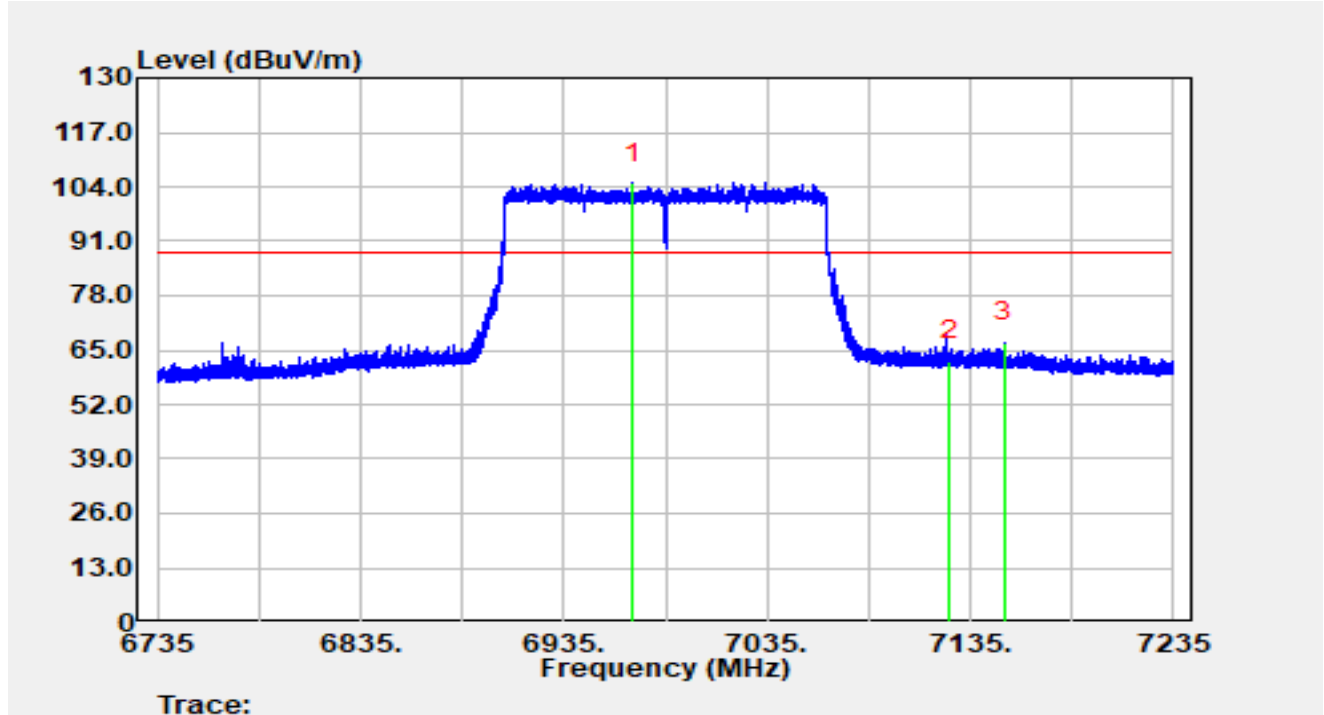


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6968.80	81.41	23.55	104.96	N/A	N/A	Peak
2		7125.00	37.98	24.48	62.47	-25.73	88.20	Peak
3	*	7151.55	41.96	24.78	66.75	-21.45	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

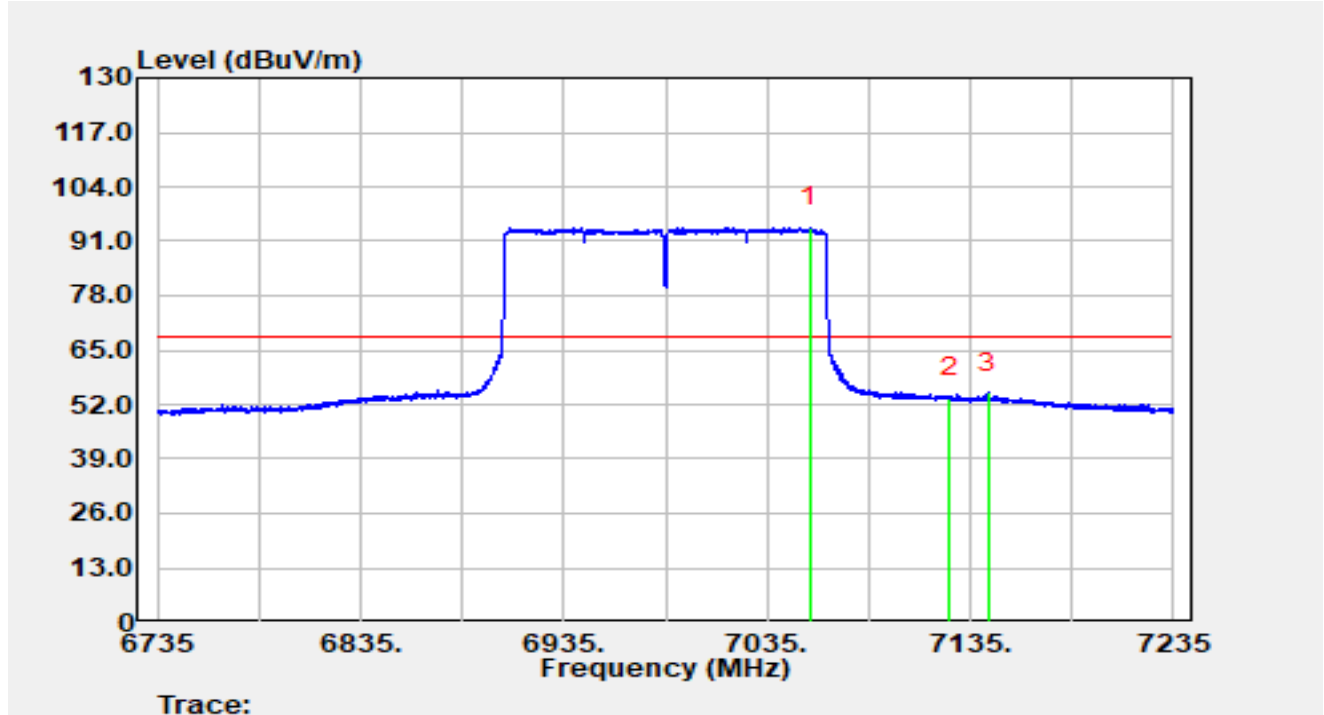


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7056.30	70.01	24.27	94.29	N/A	N/A	Average
2		7125.00	29.06	24.48	53.54	-14.66	68.20	Average
3	*	7143.65	30.23	24.71	54.94	-13.26	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

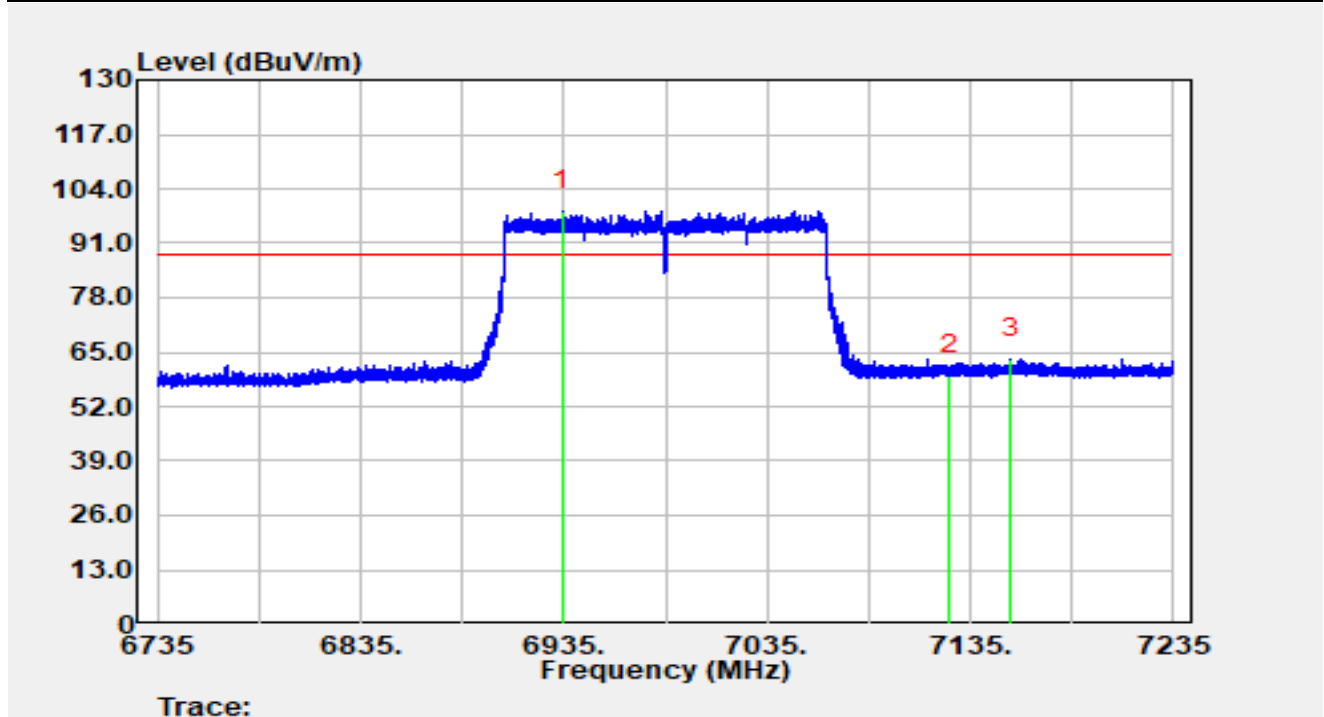


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6934.35	75.09	23.60	98.69	N/A	N/A	Peak
2		7125.00	34.91	24.48	59.40	-28.80	88.20	Peak
3	*	7154.85	38.52	24.79	63.31	-24.89	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-05
Temperature	24.9 °C	Humidity	62.5 %
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

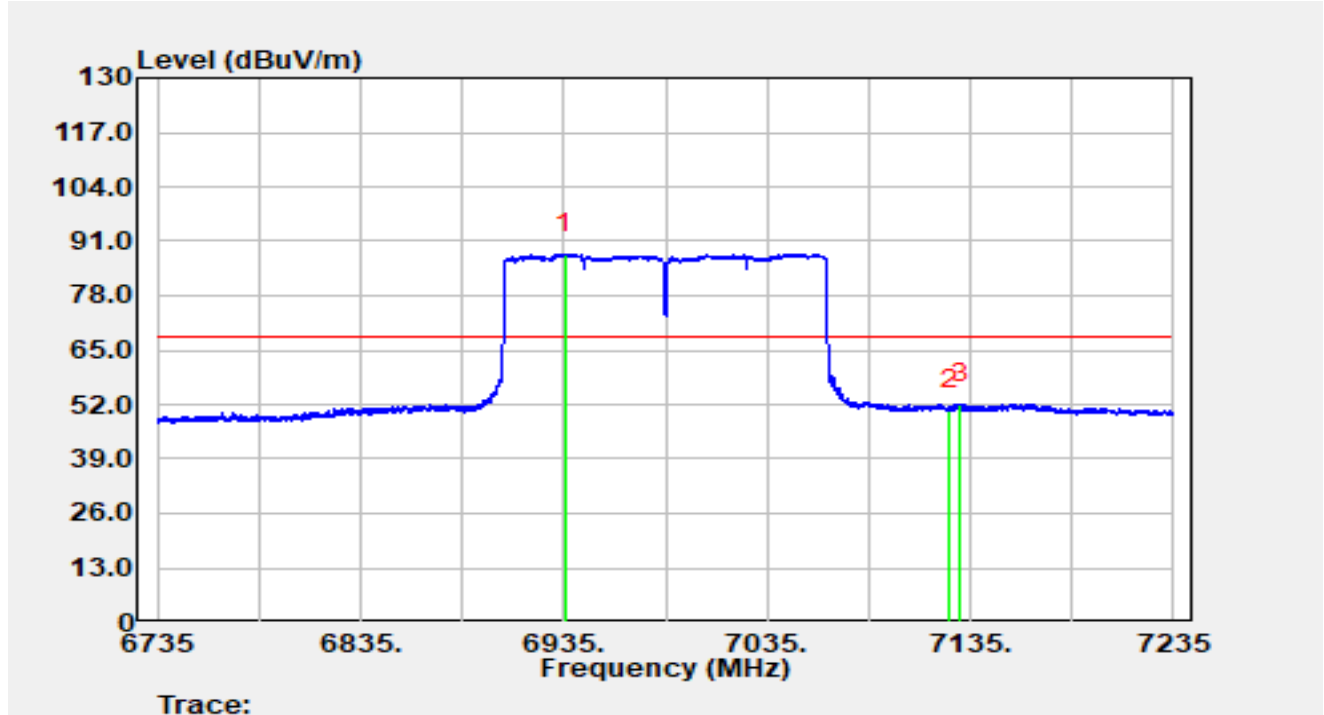


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6935.65	64.41	23.61	88.03	N/A	N/A	Average
2		7125.00	26.24	24.48	50.73	-17.47	68.20	Average
3	*	7130.05	27.58	24.52	52.10	-16.10	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-30
Temperature	25.6 °C	Humidity	45.8 %
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

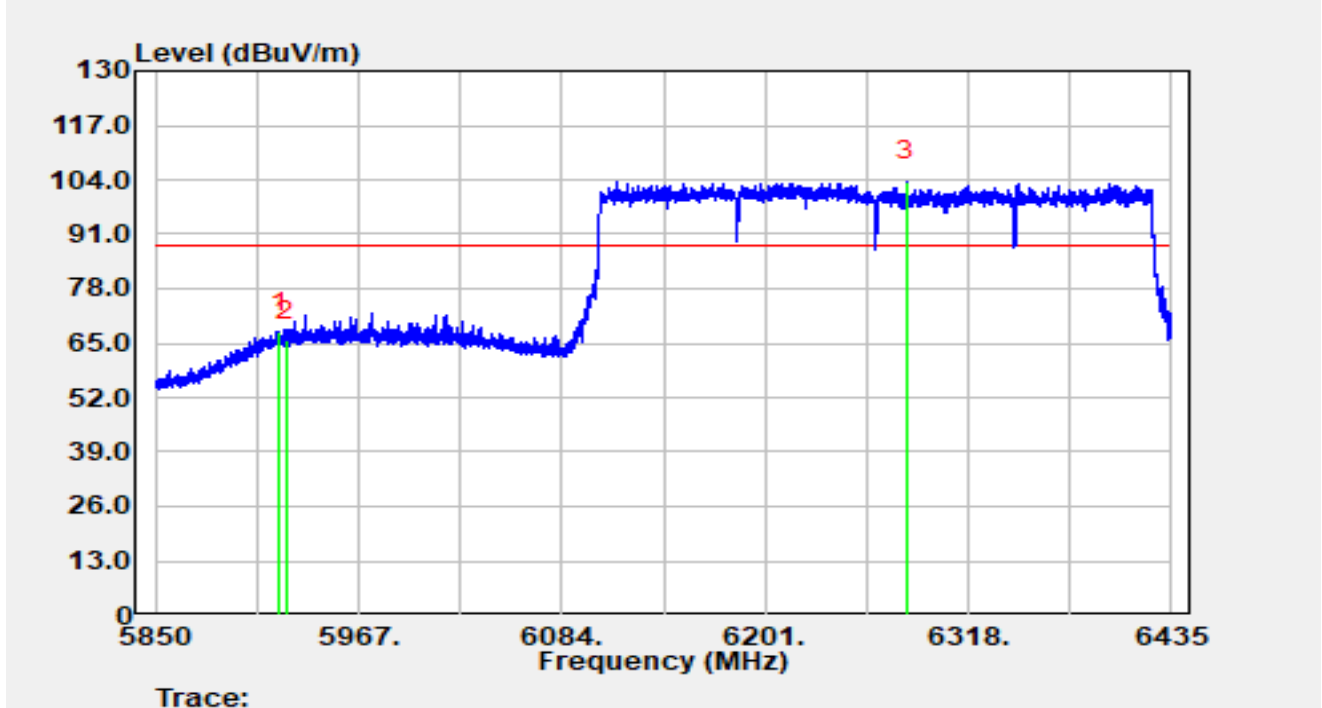


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.60	46.48	21.12	67.60	-20.60	88.20	Peak
2		5925.00	44.60	21.12	65.72	-22.48	88.20	Peak
3		6282.32	82.07	21.45	103.52	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-30
Temperature	25.6 °C	Humidity	45.8 %
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

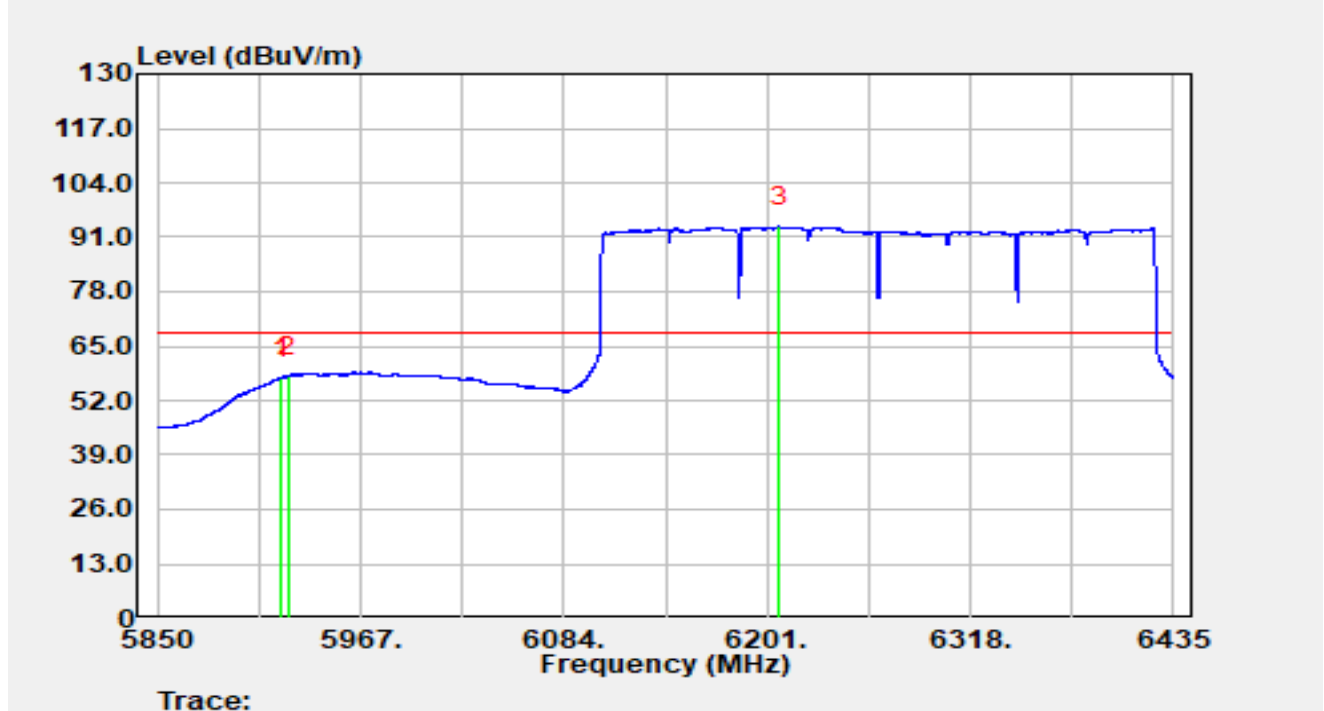


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5921.43	36.27	21.12	57.39	-10.81	68.20	Average
2	*	5925.00	36.74	21.12	57.86	-10.34	68.20	Average
3		6207.73	72.06	21.47	93.53	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-30
Temperature	25.6 °C	Humidity	45.8 %
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

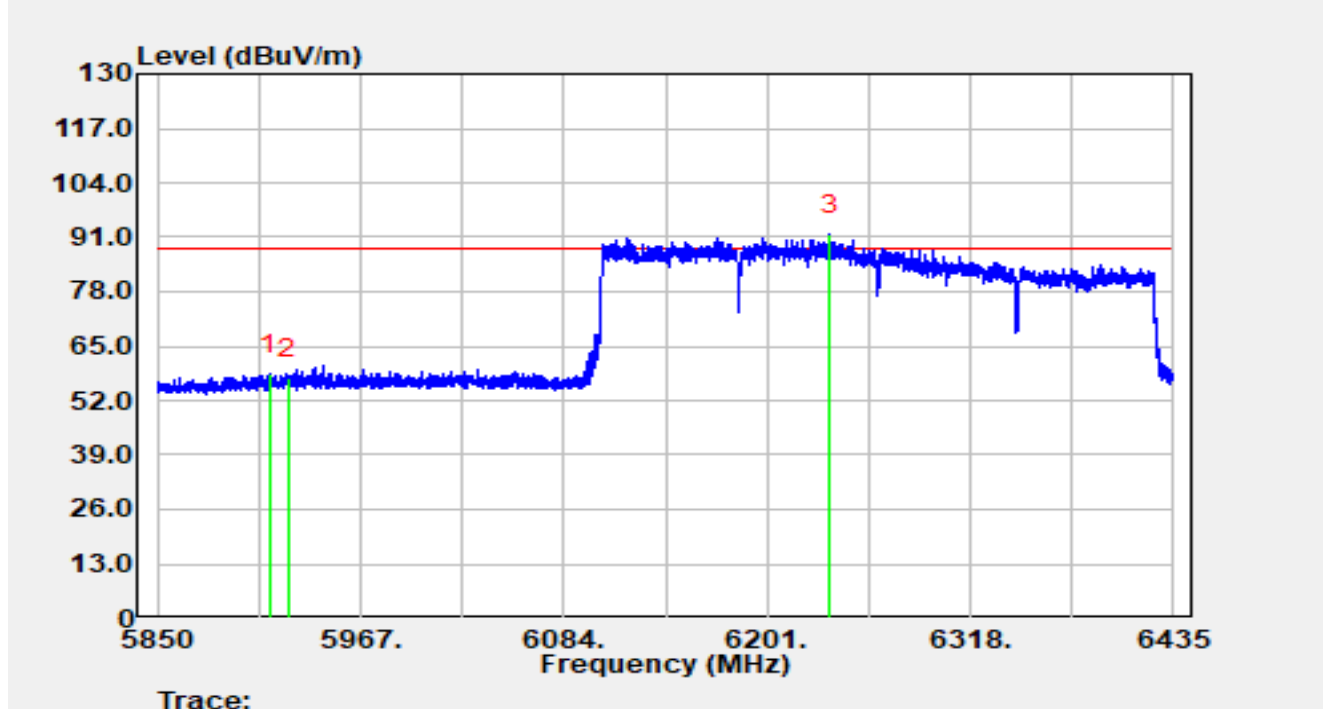


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5914.23	37.18	21.09	58.27	-29.93	88.20	Peak
2		5925.00	36.06	21.12	57.18	-31.02	88.20	Peak
3		6236.92	70.01	21.68	91.69	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-30
Temperature	25.6 °C	Humidity	45.8 %
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

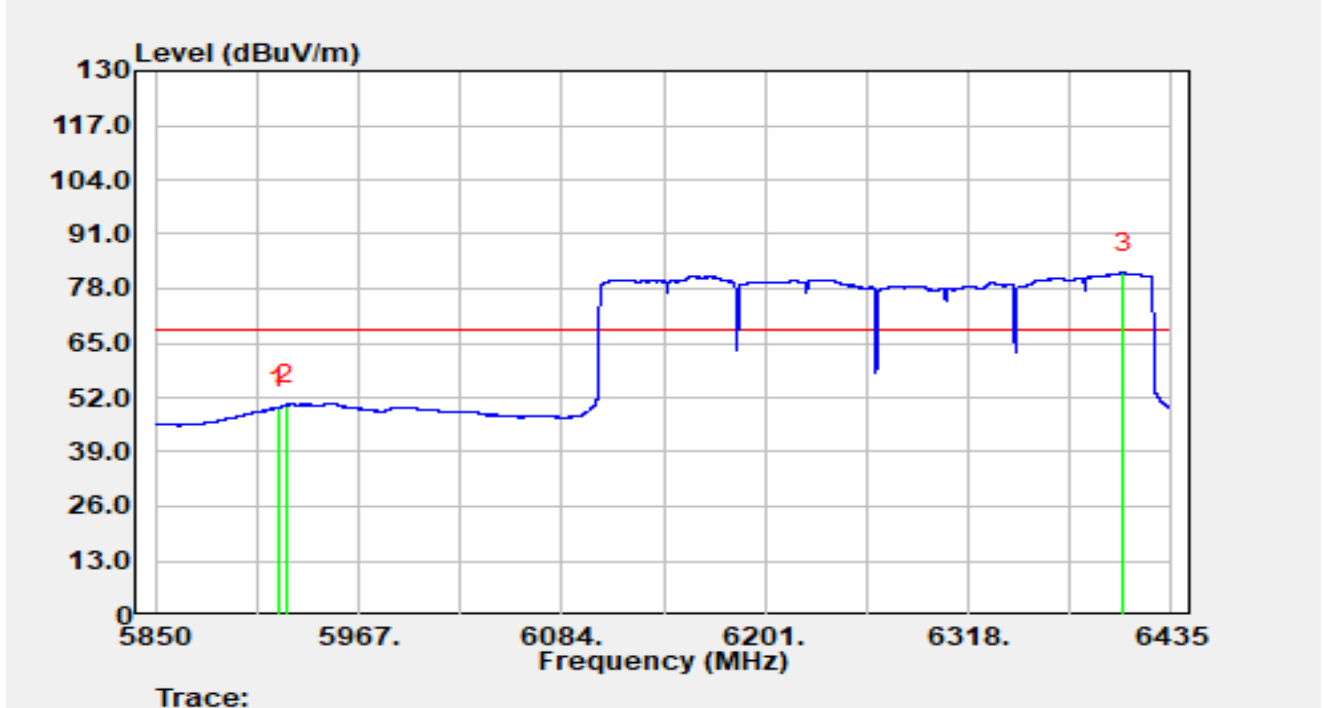


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5920.43	28.36	21.11	49.48	-18.72	68.20	Average
2	*	5925.00	28.96	21.12	50.08	-18.12	68.20	Average
3		6407.39	59.58	22.20	81.77	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-30
Temperature	25.6 °C	Humidity	45.8 %
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

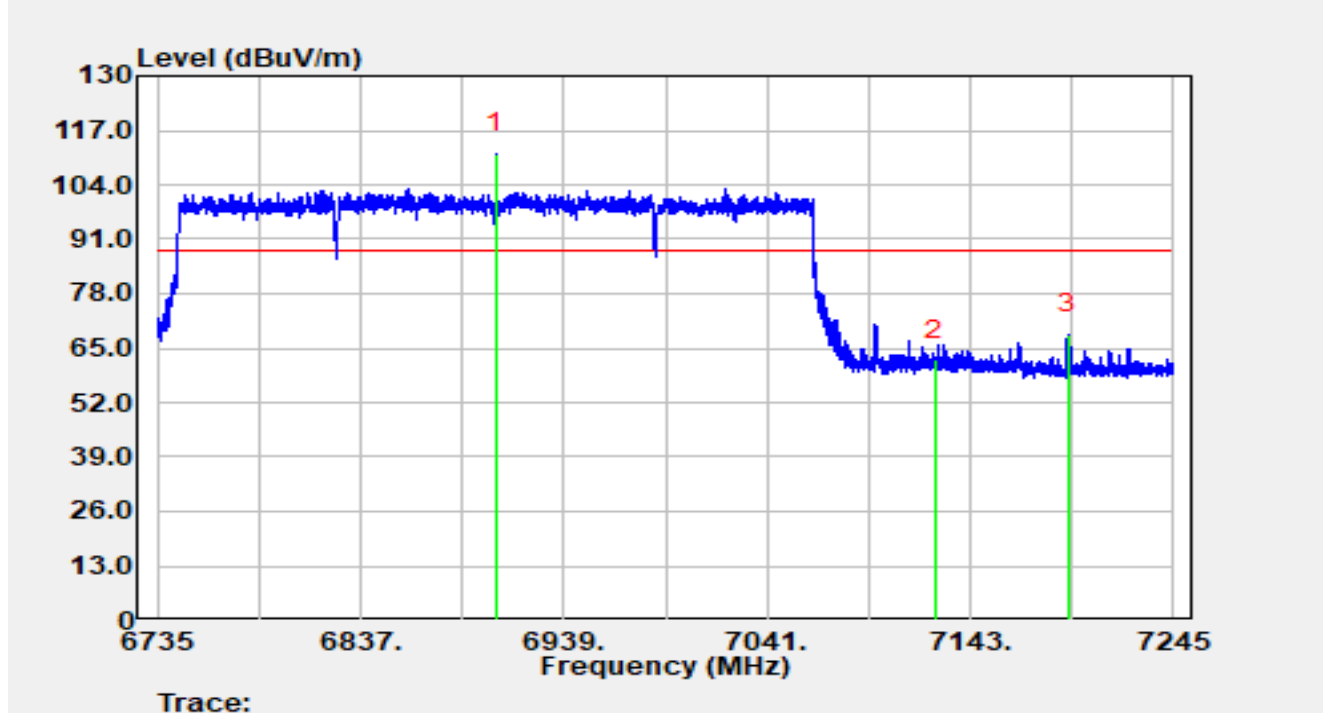


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6905.14	88.30	23.10	111.40	N/A	N/A	Peak
2		7125.00	37.65	24.48	62.14	-26.06	88.20	Peak
3	*	7191.81	43.76	24.49	68.25	-19.95	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-30
Temperature	25.6 °C	Humidity	45.8 %
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

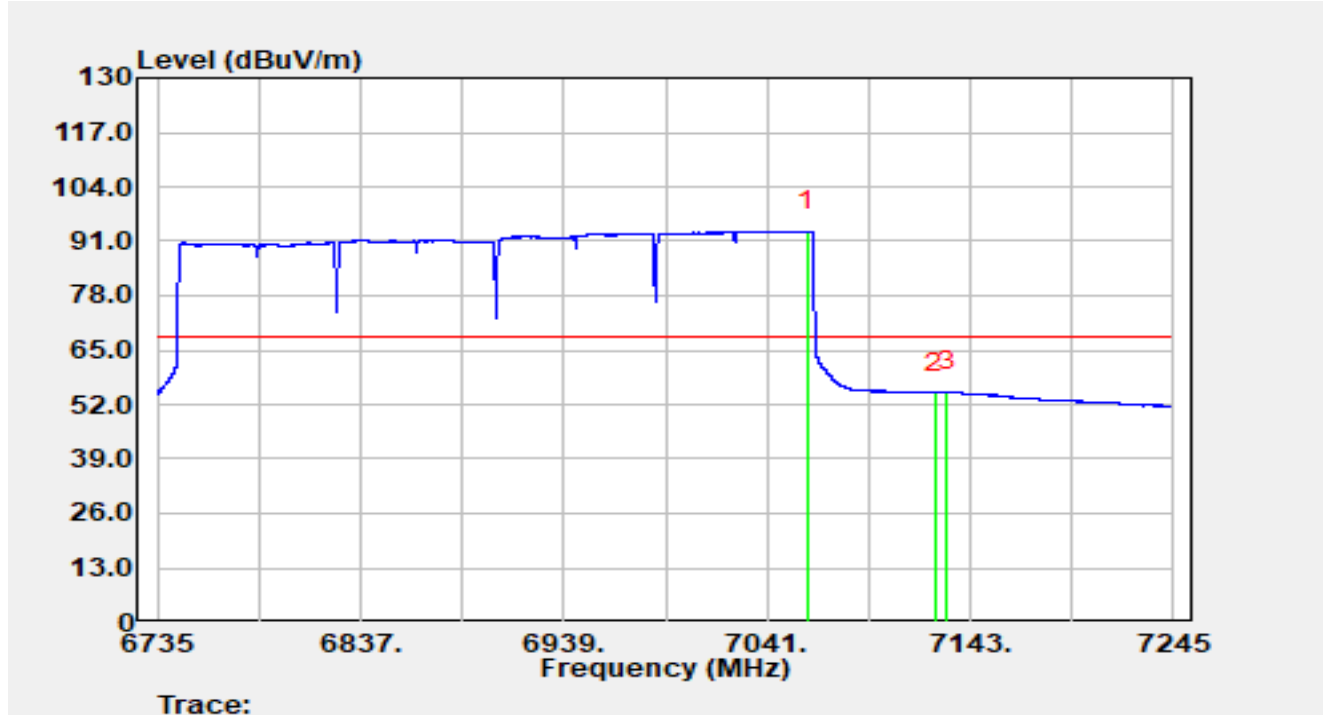


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7061.30	69.22	24.22	93.44	N/A	N/A	Average
2		7125.00	30.40	24.48	54.88	-13.32	68.20	Average
3	*	7131.12	30.64	24.54	55.18	-13.02	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-30
Temperature	25.6 °C	Humidity	45.8 %
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

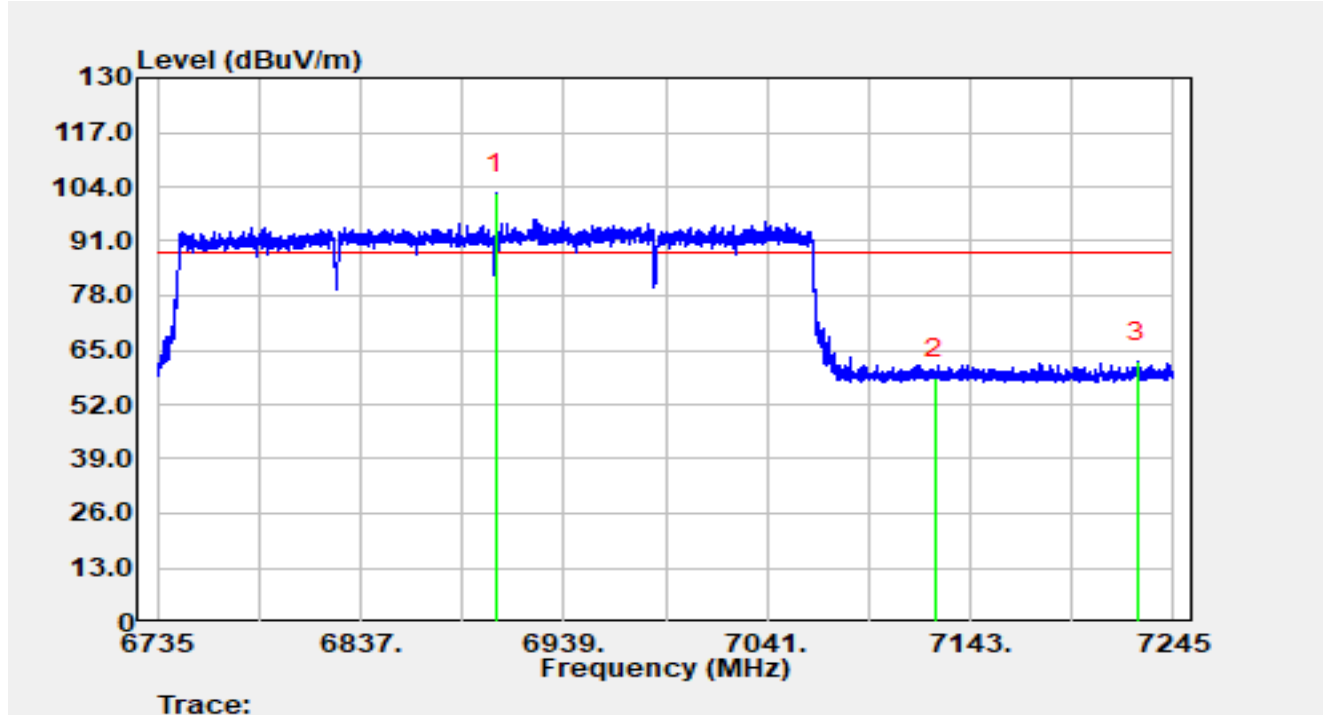


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6904.88	79.32	23.10	102.42	N/A	N/A	Peak
2		7125.00	33.77	24.48	58.26	-29.94	88.20	Peak
3	*	7226.64	37.49	24.74	62.23	-25.97	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-30
Temperature	25.6 °C	Humidity	45.8 %
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

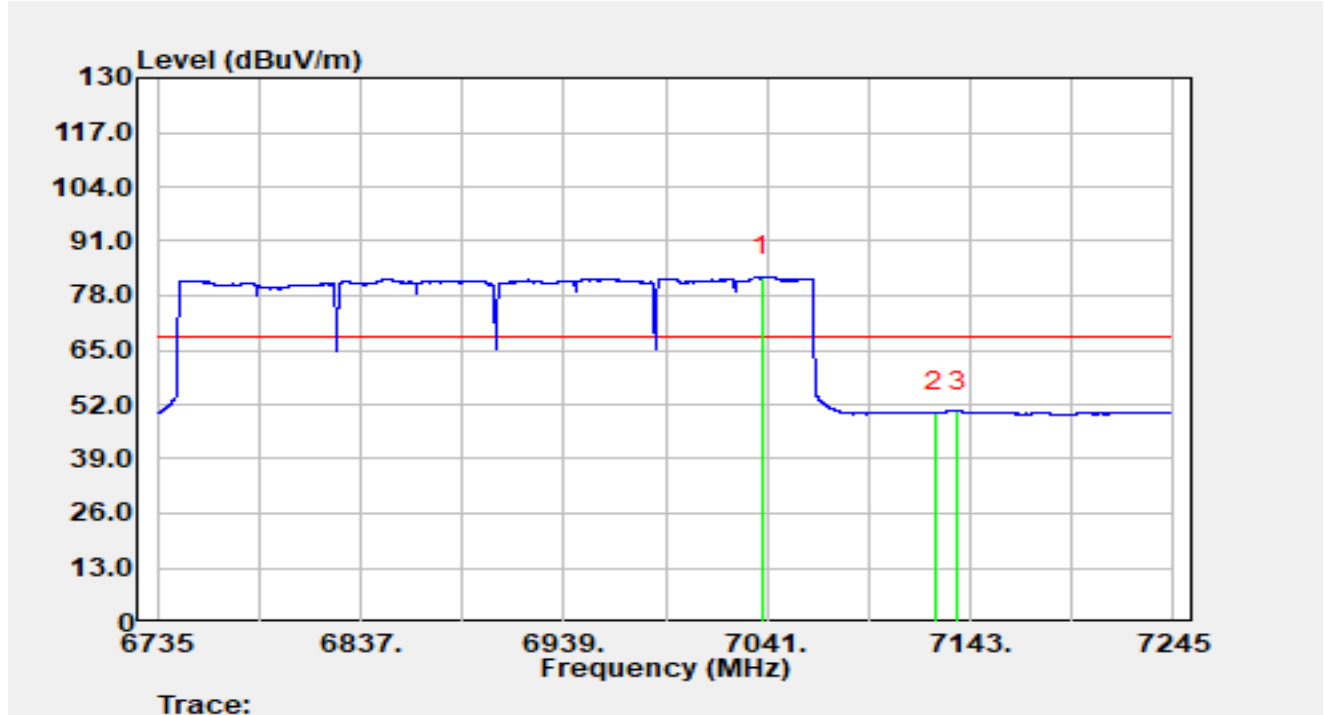


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7038.14	58.41	24.18	82.59	N/A	N/A	Average
2		7125.00	25.56	24.48	50.04	-18.16	68.20	Average
3	*	7136.68	25.81	24.63	50.43	-17.77	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-06-12
Temperature	24.0 °C	Humidity	64.9 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

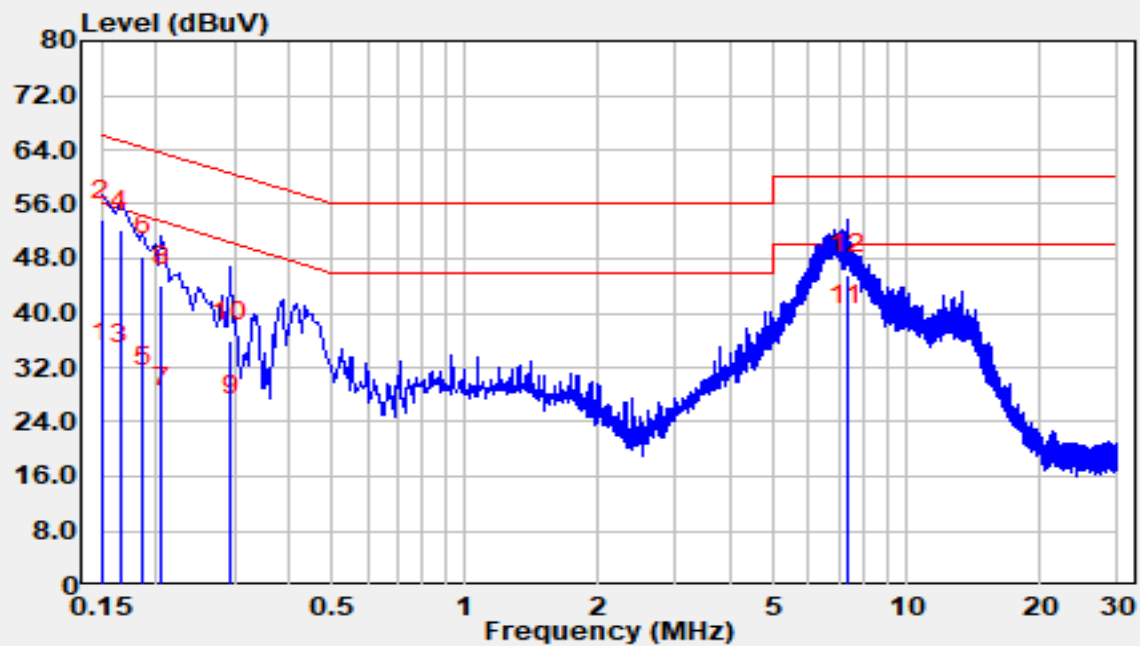


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	22.70	9.92	32.62	-23.38	56.00	Average
2		0.15	43.70	9.92	53.62	-12.38	66.00	QP
3		0.17	22.60	9.92	32.52	-22.68	55.21	Average
4		0.17	42.20	9.92	52.12	-13.08	65.21	QP
5		0.19	19.30	9.93	29.23	-24.98	54.21	Average
6		0.19	38.50	9.93	48.43	-15.78	64.21	QP
7		0.21	16.20	9.94	26.14	-27.23	53.37	Average
8		0.21	34.10	9.94	44.04	-19.33	63.37	QP
9		0.29	15.00	9.99	24.99	-25.42	50.41	Average
10		0.29	25.80	9.99	35.79	-24.62	60.41	QP
11	*	7.31	26.80	11.41	38.21	-11.79	50.00	Average

12		7.31	34.20	11.41	45.61	-14.39	60.00	QP
----	--	------	-------	-------	-------	--------	-------	----

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-06-12
Temperature	24.0 °C	Humidity	64.9 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

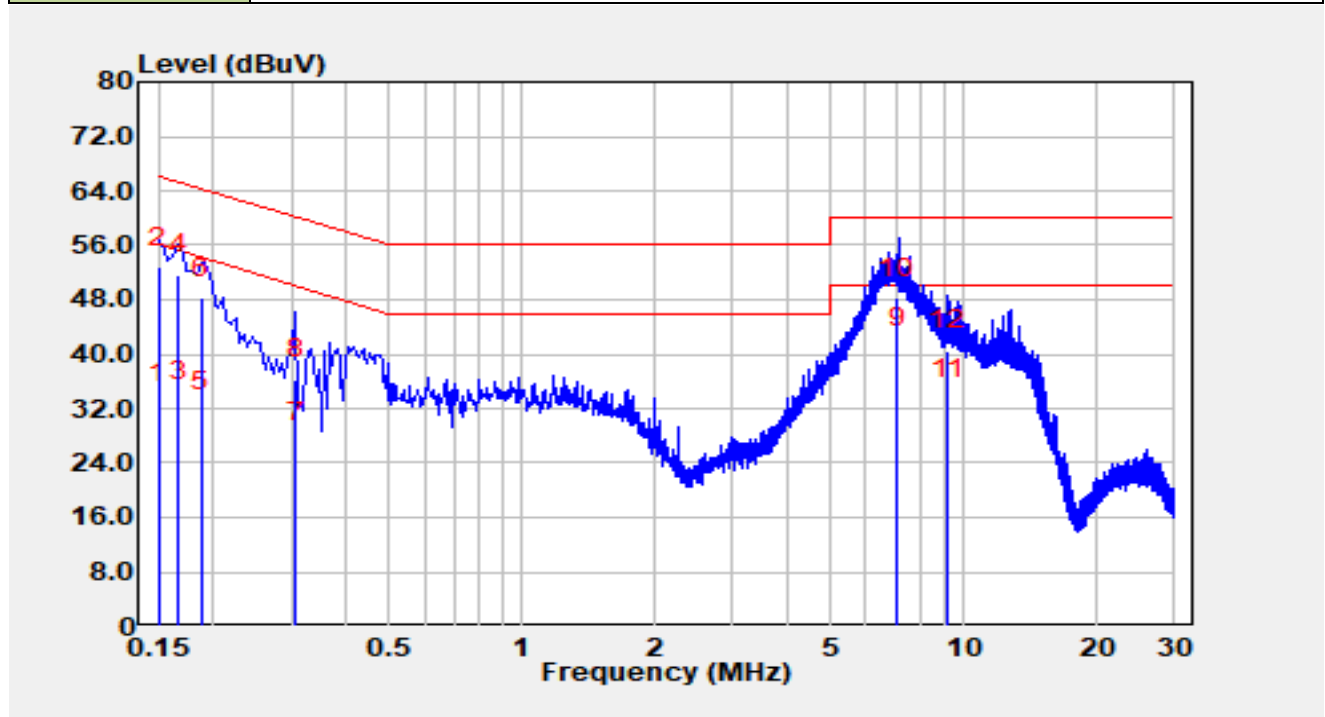

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	22.90	9.97	32.87	-23.13	56.00	Average
2		0.15	42.80	9.97	52.77	-13.23	66.00	QP
3		0.17	23.00	9.96	32.96	-22.15	55.11	Average
4		0.17	41.80	9.96	51.76	-13.35	65.11	QP
5		0.19	21.70	9.96	31.66	-22.47	54.12	Average
6		0.19	38.30	9.96	48.26	-15.87	64.12	QP
7		0.31	17.00	10.00	27.00	-23.07	50.08	Average
8		0.31	26.30	10.00	36.30	-23.77	60.08	QP
9	*	7.08	29.60	11.39	40.99	-9.01	50.00	Average
10		7.08	36.80	11.39	48.19	-11.81	60.00	QP
11		9.19	21.90	11.46	33.36	-16.64	50.00	Average
12		9.19	29.00	11.46	40.46	-19.54	60.00	QP

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1080046-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1080046-UE” file.

The End
