


EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band 3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

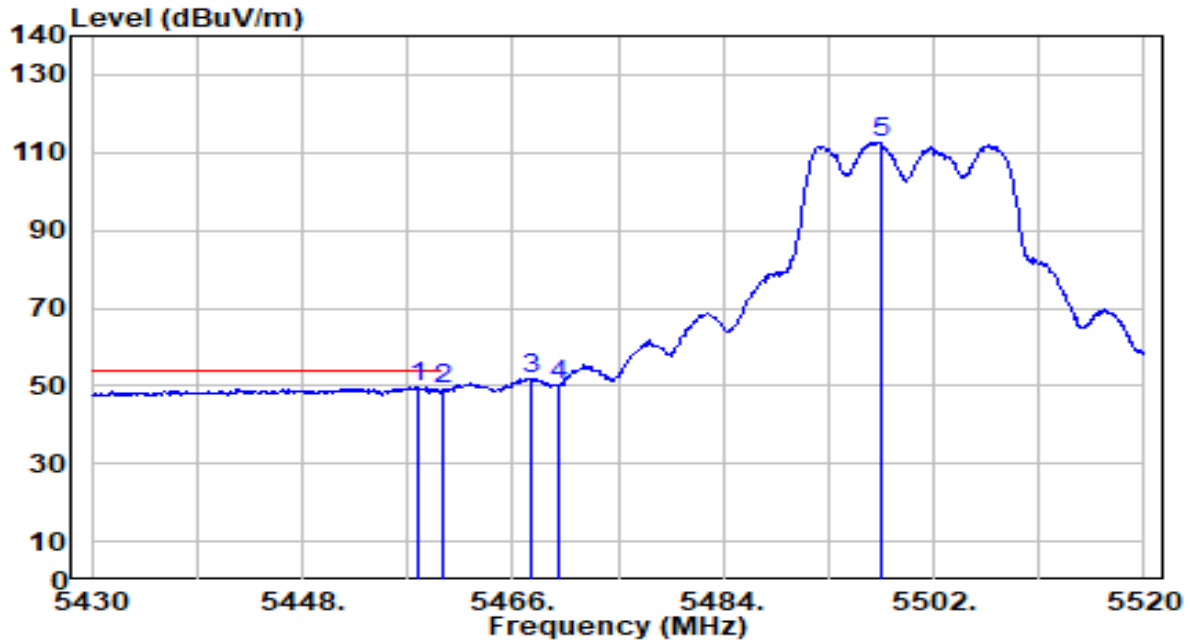


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.810	49.19	0.65	49.84	-4.16	54.00	150	166	Average
2		5460.000	48.24	0.66	48.90	-5.10	54.00	150	166	Average
3		5467.620	51.29	0.70	51.99	N/A	N/A	150	166	Average
4		5470.000	49.53	0.71	50.23	N/A	N/A	150	166	Average
5		5497.500	111.86	0.83	112.69	N/A	N/A	150	166	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band 3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

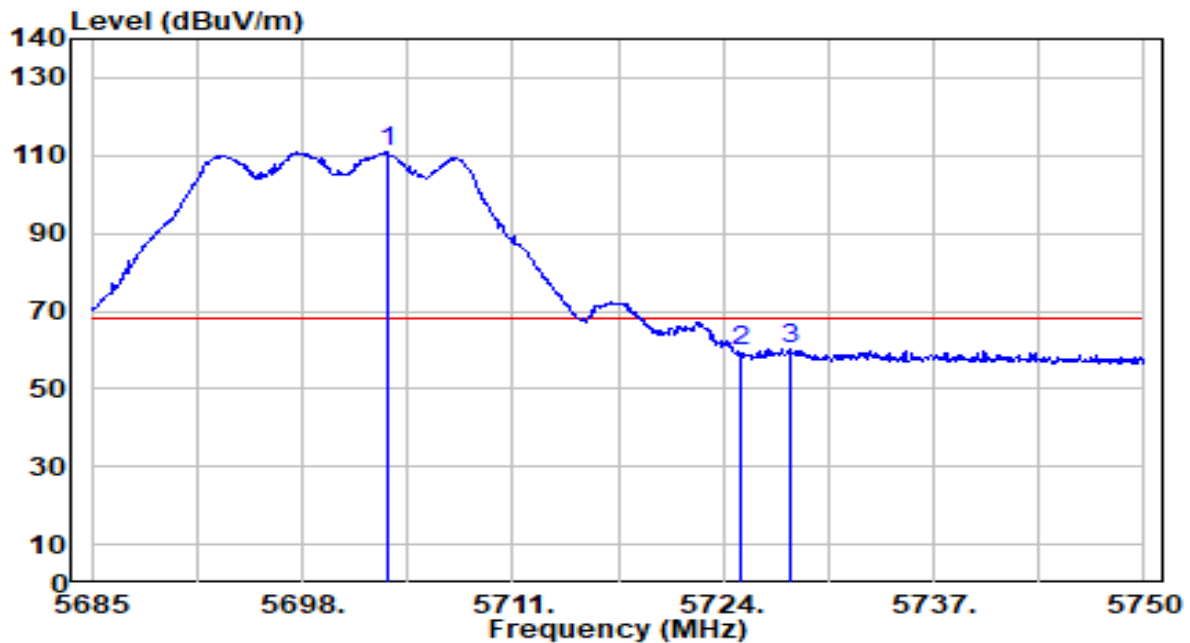


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.330	109.31	1.79	111.10	N/A	N/A	200	317	Peak
2	5725.000	58.05	1.89	59.95	-8.25	68.20	200	317	Peak
3	* 5728.225	58.44	1.91	60.35	-7.85	68.20	200	317	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band 3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

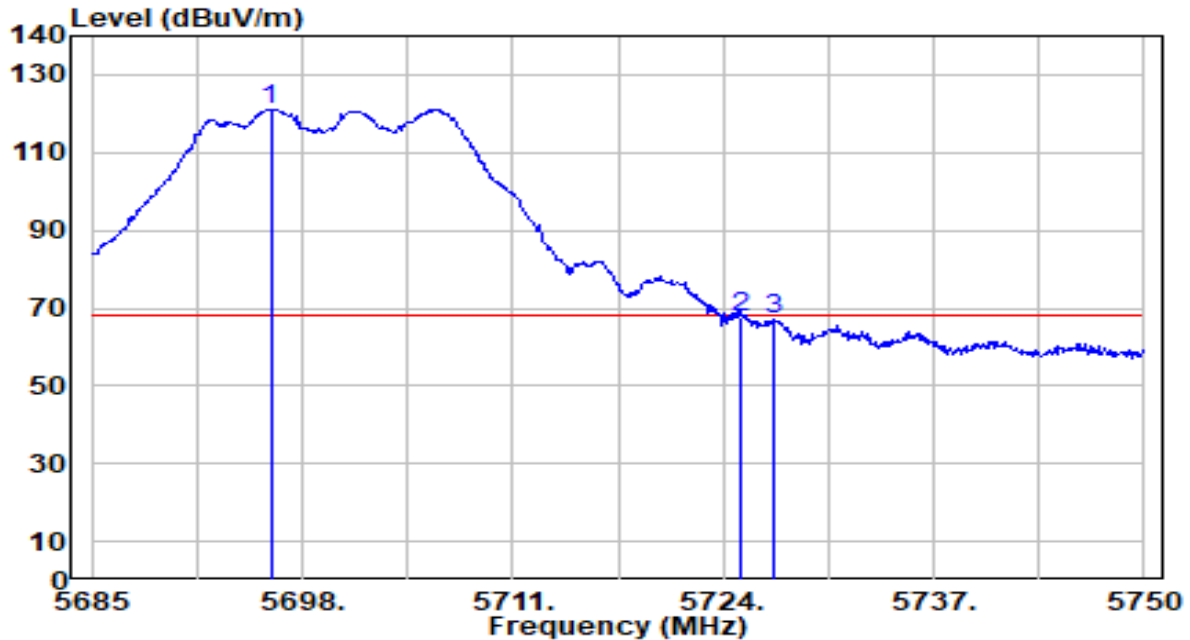


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5696.050	119.33	1.76	121.09	N/A	N/A	150	166	Peak
2	* 5725.000	65.95	1.89	67.84	-0.36	68.20	150	166	Peak
3	5727.120	65.08	1.90	66.98	-1.22	68.20	150	166	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

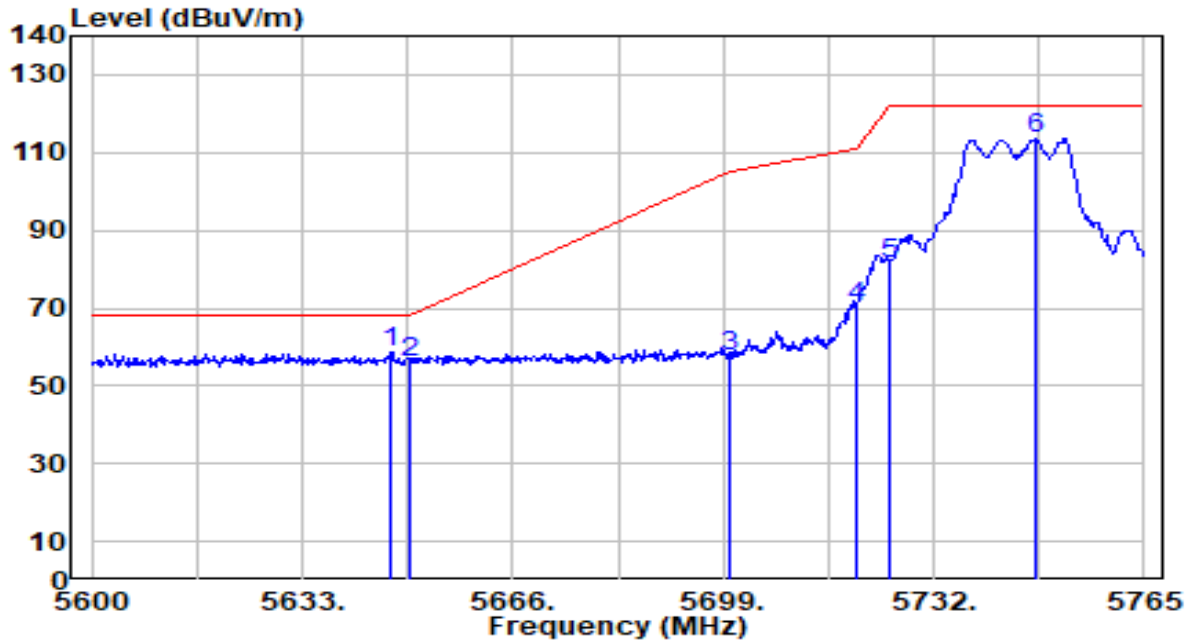


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.025	57.37	1.53	58.90	-9.30	68.20	100	174	Peak
2		5650.000	54.69	1.54	56.23	-11.97	68.20	100	174	Peak
3		5700.000	55.99	1.78	57.76	-47.44	105.20	100	174	Peak
4		5720.000	68.59	1.87	70.46	-40.34	110.80	100	174	Peak
5		5725.000	79.60	1.89	81.49	-40.71	122.20	100	174	Peak
6		5748.005	111.58	2.00	113.58	N/A	N/A	100	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

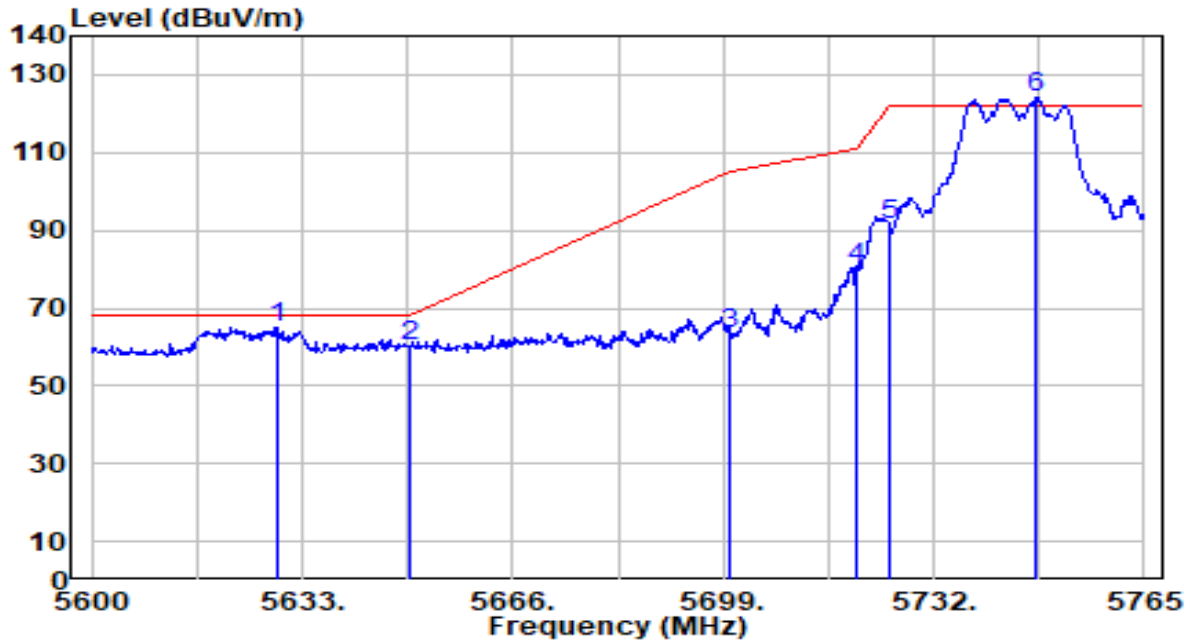


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5629.040	63.77	1.44	65.22	-2.98	68.20	100	351	Peak
2		5650.000	58.85	1.54	60.39	-7.81	68.20	100	351	Peak
3		5700.000	61.64	1.78	63.41	-41.79	105.20	100	351	Peak
4		5720.000	78.21	1.87	80.08	-30.72	110.80	100	351	Peak
5		5725.000	89.63	1.89	91.53	-30.67	122.20	100	351	Peak
6		5748.170	122.07	2.00	124.07	N/A	N/A	100	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

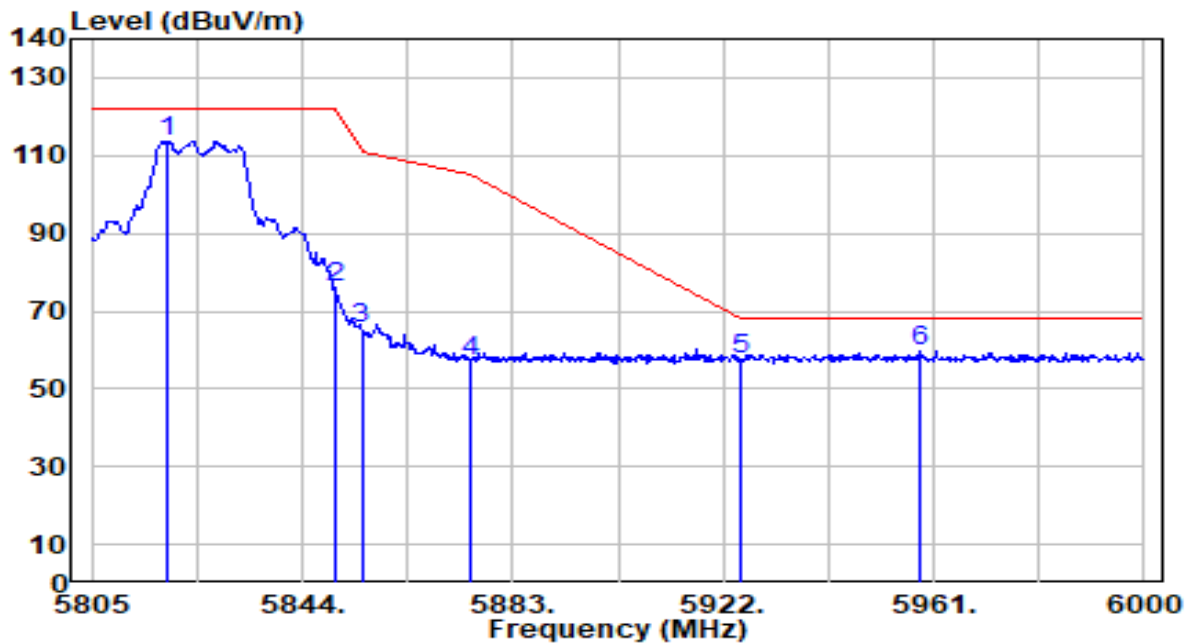


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5818.845	111.60	2.25	113.84	N/A	N/A	100	219	Peak
2	5850.000	73.71	2.25	75.96	-46.24	122.20	100	219	Peak
3	5855.000	63.28	2.25	65.53	-45.27	110.80	100	219	Peak
4	5875.000	54.81	2.26	57.07	-48.13	105.20	100	219	Peak
5	5925.000	55.21	2.27	57.48	-10.72	68.20	100	219	Peak
6	* 5958.465	57.54	2.27	59.81	-8.39	68.20	100	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

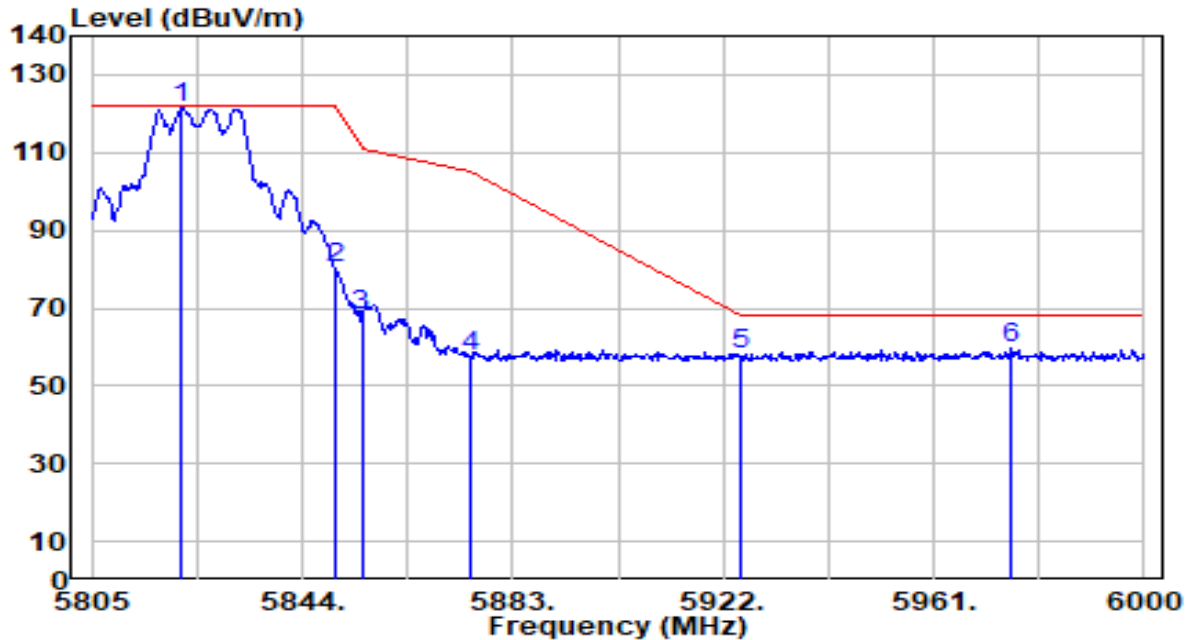


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5821.770	119.14	2.25	121.39	N/A	N/A	200	78	Peak
2	5850.000	78.23	2.25	80.48	-41.72	122.20	200	78	Peak
3	5855.000	65.77	2.25	68.02	-42.78	110.80	200	78	Peak
4	5875.000	55.40	2.26	57.66	-47.54	105.20	200	78	Peak
5	5925.000	56.00	2.27	58.27	-9.93	68.20	200	78	Peak
6	* 5975.235	57.41	2.28	59.69	-8.51	68.20	200	78	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

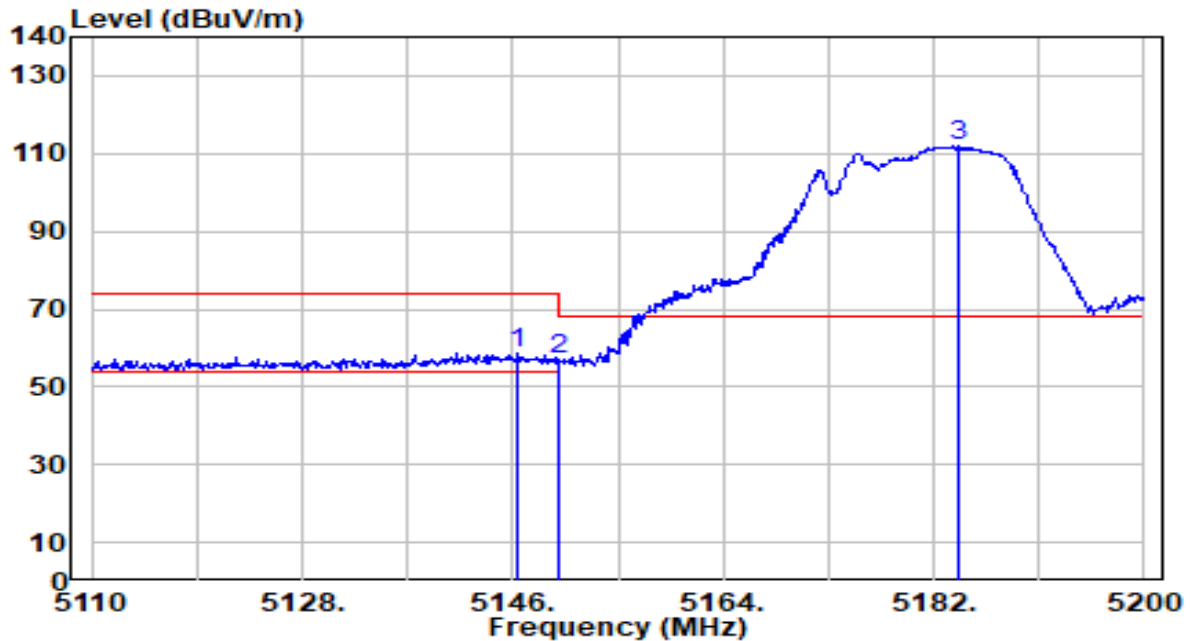


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.450	58.25	0.65	58.90	-15.10	74.00	200	16	Peak
2		5150.000	56.41	0.65	57.06	-16.94	74.00	200	16	Peak
3		5184.160	111.17	0.69	111.86	N/A	N/A	200	16	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

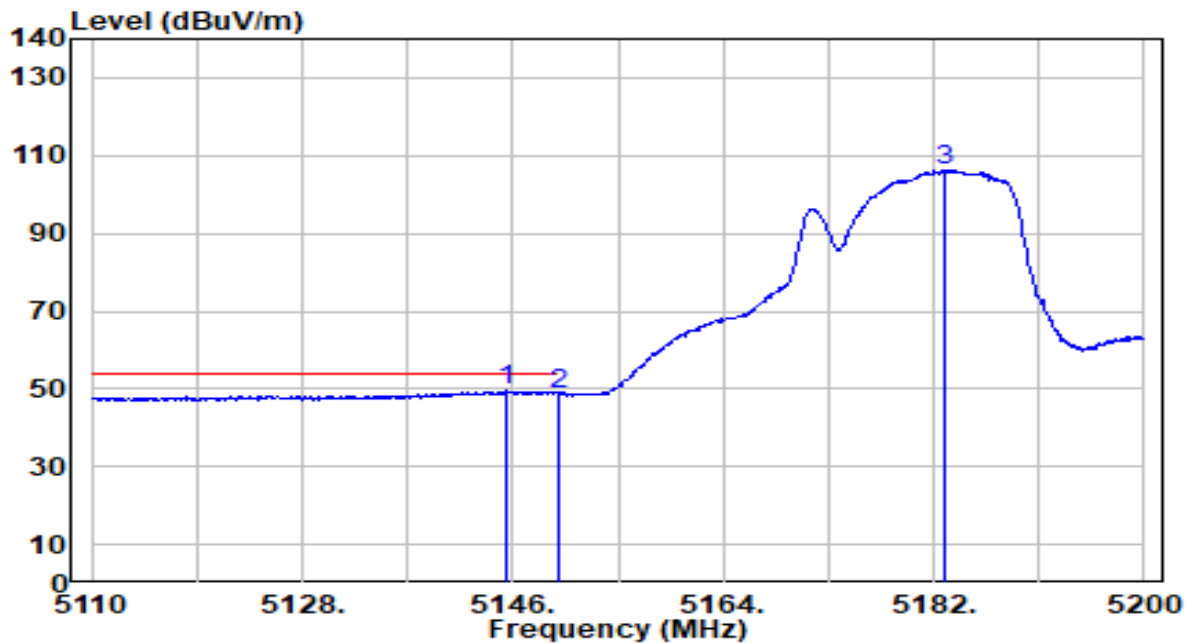


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.550	48.78	0.65	49.43	-4.57	54.00	200	16	Average
2		5150.000	48.08	0.65	48.73	-5.27	54.00	200	16	Average
3		5182.900	105.60	0.69	106.28	N/A	N/A	200	16	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

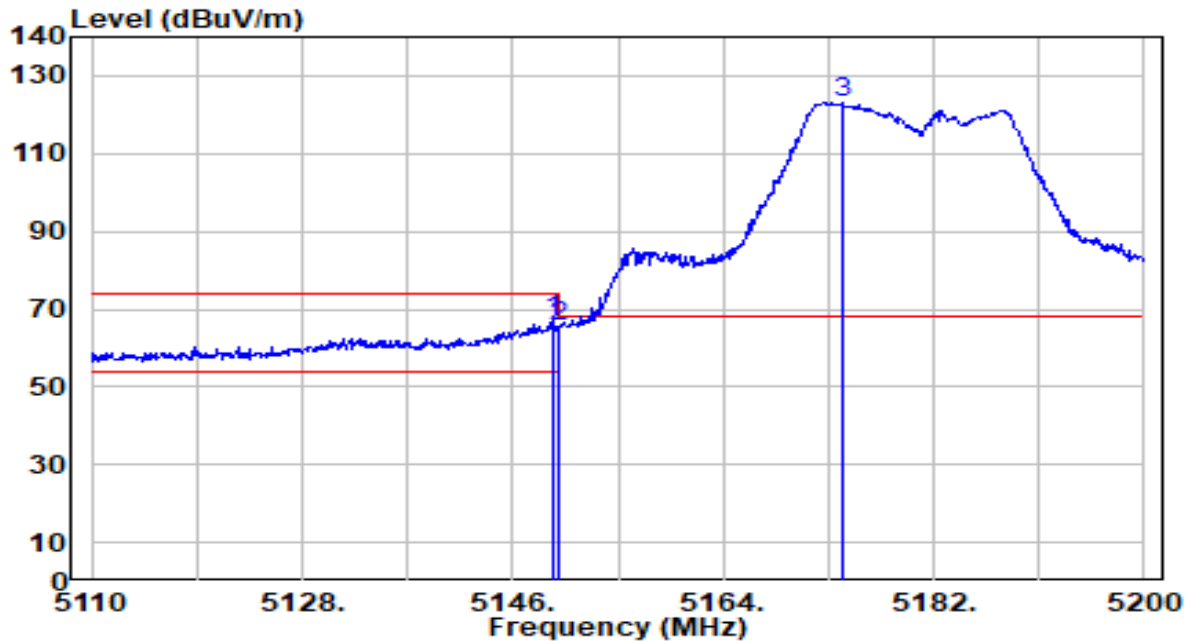


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	66.43	0.65	67.08	-6.92	74.00	150	346	Peak
2		5150.000	64.86	0.65	65.51	-8.49	74.00	150	346	Peak
3		5174.170	122.38	0.68	123.06	N/A	N/A	150	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

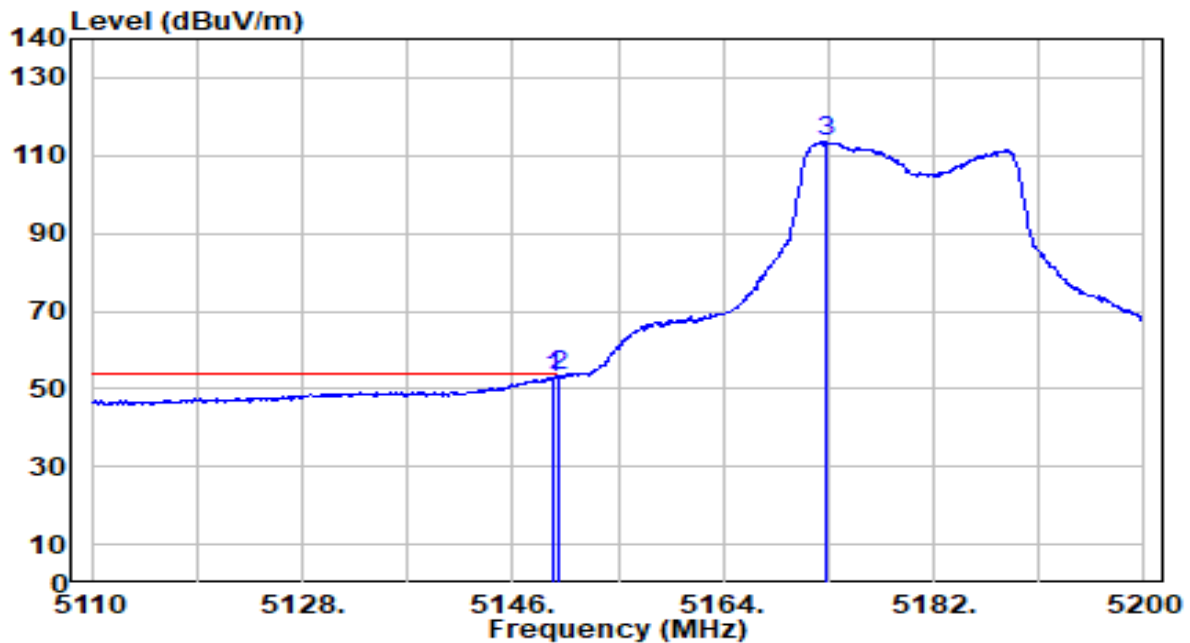


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	52.44	0.65	53.09	-0.91	54.00	150	346	Average
2	*	5150.000	52.88	0.65	53.54	-0.46	54.00	150	346	Average
3		5172.820	112.85	0.68	113.53	N/A	N/A	150	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

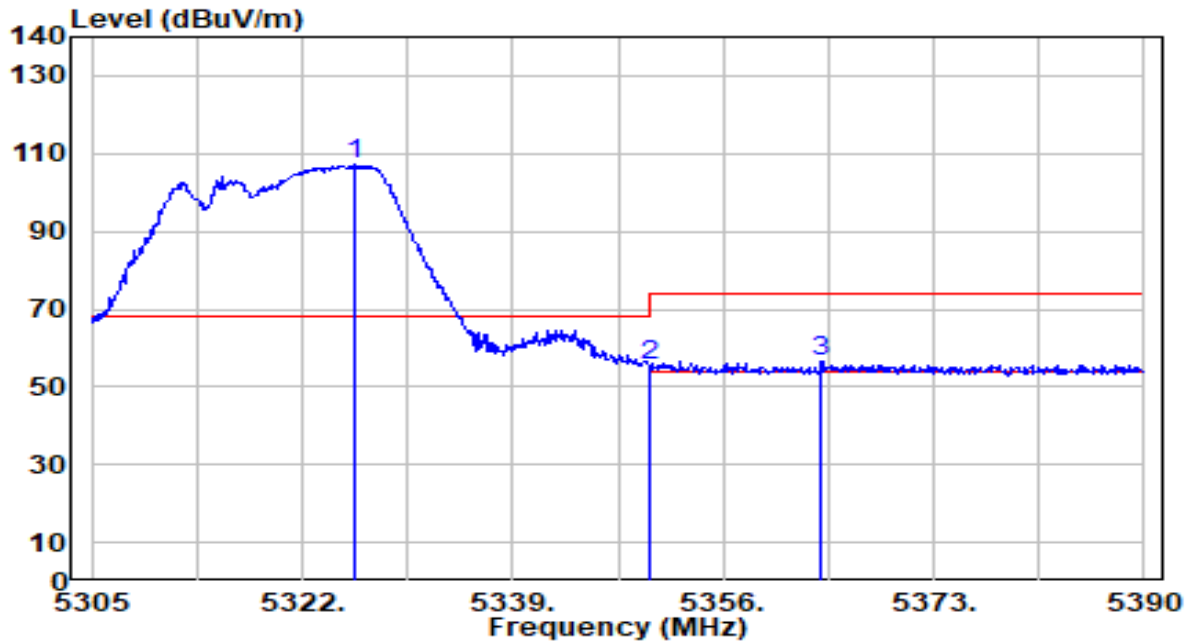


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.335	106.57	0.51	107.08	N/A	N/A	200	14	Peak
2	5350.000	55.17	0.47	55.65	-18.35	74.00	200	14	Peak
3	* 5363.905	56.32	0.45	56.77	-17.23	74.00	200	14	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

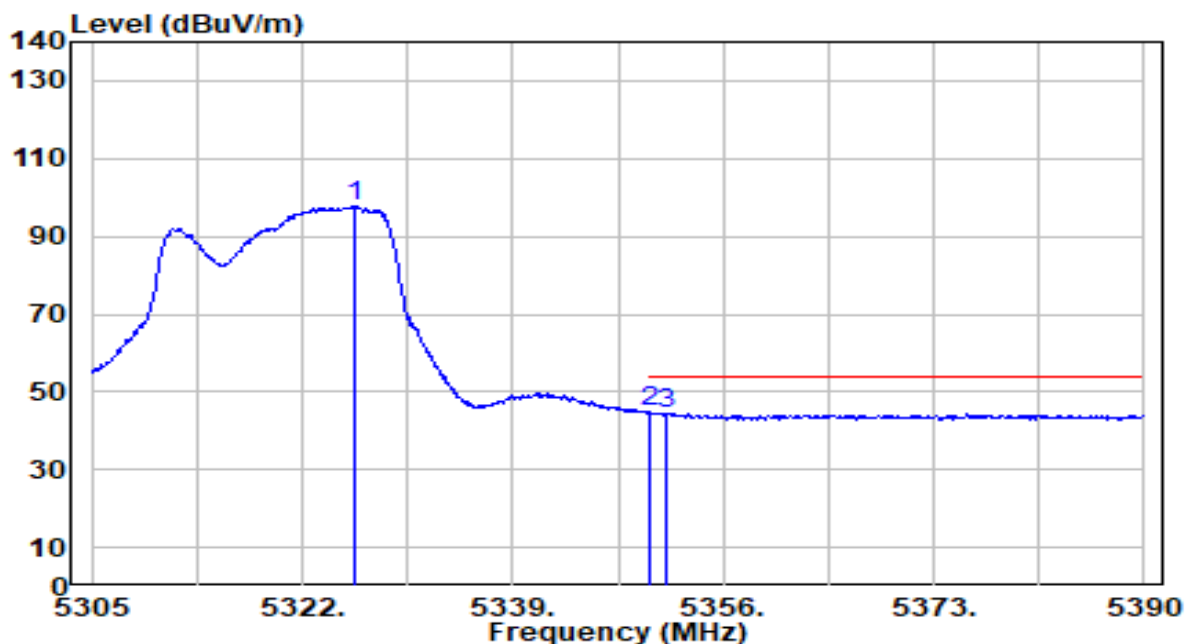


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5326.250	97.19	0.51	97.69	N/A	N/A	200	14	Average
2	*	5350.000	44.53	0.47	45.00	-9.00	54.00	200	14	Average
3		5351.325	44.05	0.47	44.51	-9.49	54.00	200	14	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

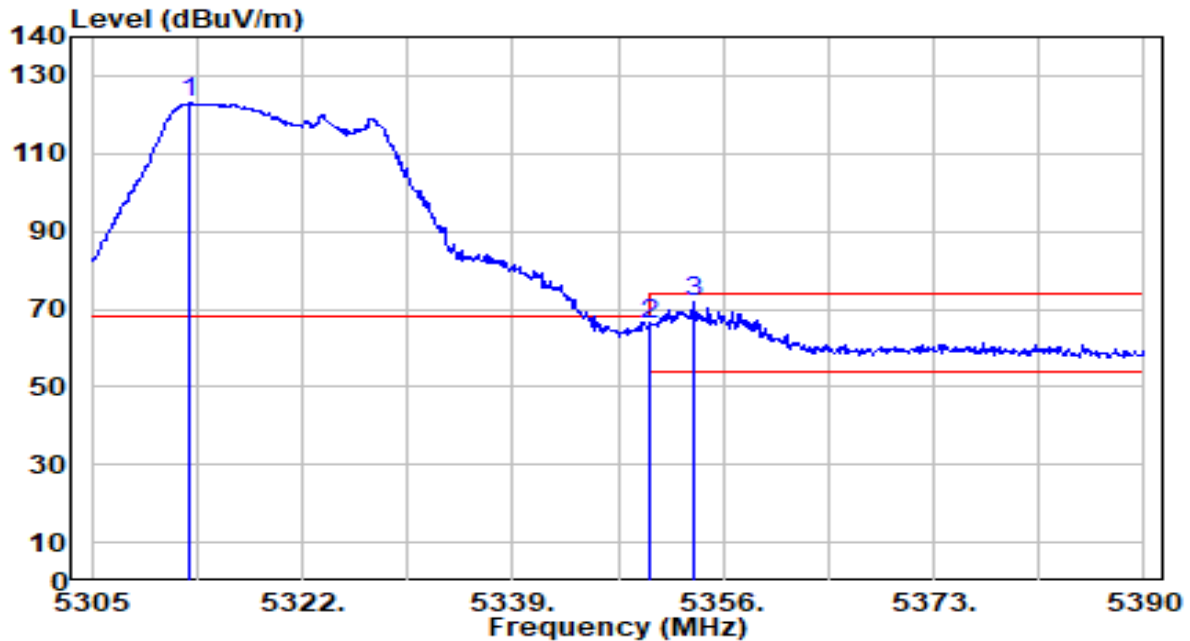


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.905	122.71	0.53	123.24	N/A	N/A	150	347	Peak
2	5350.000	65.65	0.47	66.12	-7.88	74.00	150	347	Peak
3	* 5353.535	71.21	0.47	71.68	-2.32	74.00	150	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

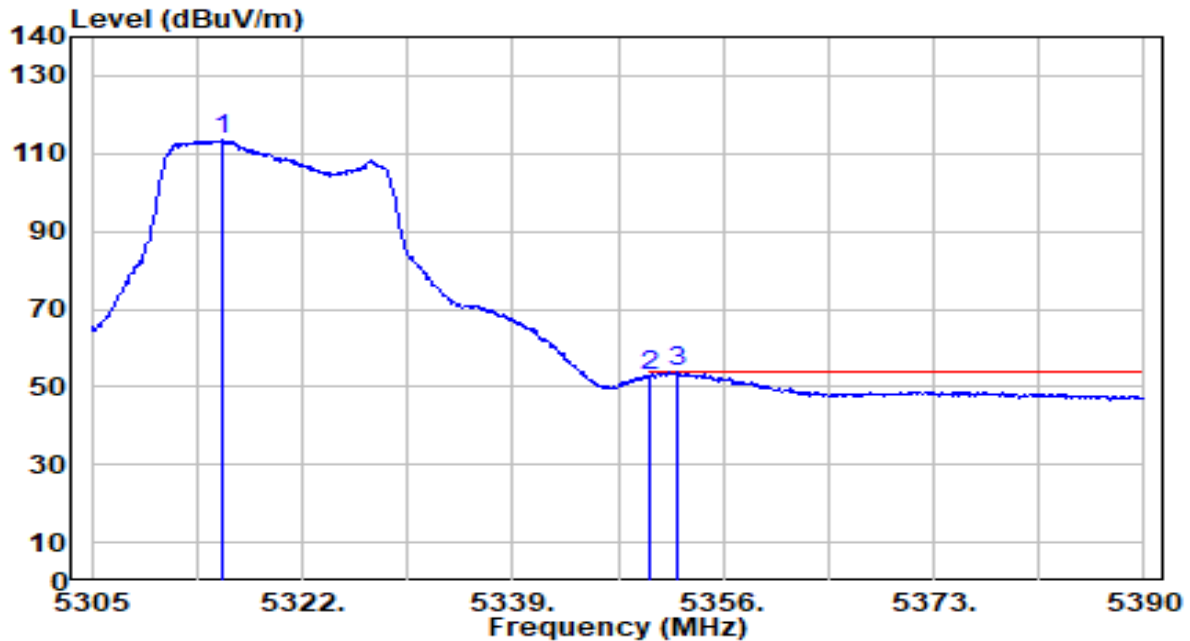


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.455	112.84	0.52	113.36	N/A	N/A	150	347	Average
2	5350.000	52.12	0.47	52.59	-1.41	54.00	150	347	Average
3	* 5352.260	53.42	0.47	53.89	-0.11	54.00	150	347	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

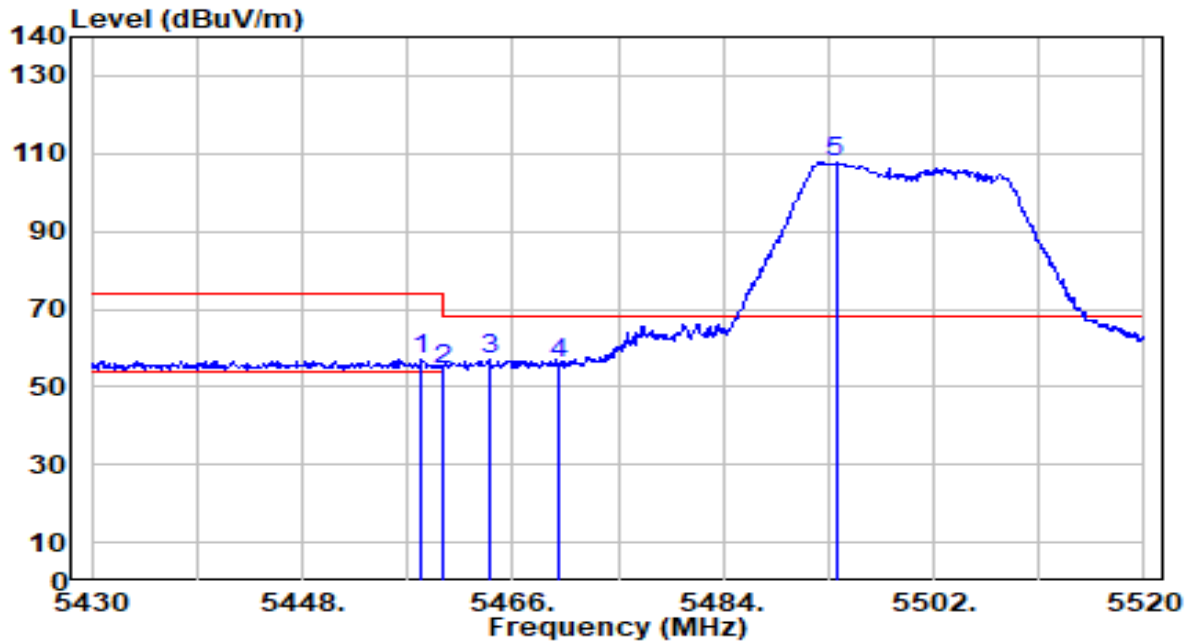


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.170	56.45	0.65	57.10	-16.90	74.00	200	316	Peak
2	5460.000	53.95	0.66	54.61	-19.39	74.00	200	316	Peak
3	* 5464.020	56.62	0.68	57.30	-10.90	68.20	200	316	Peak
4	5470.000	55.15	0.71	55.86	-12.34	68.20	200	316	Peak
5	5493.630	106.95	0.81	107.76	N/A	N/A	200	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

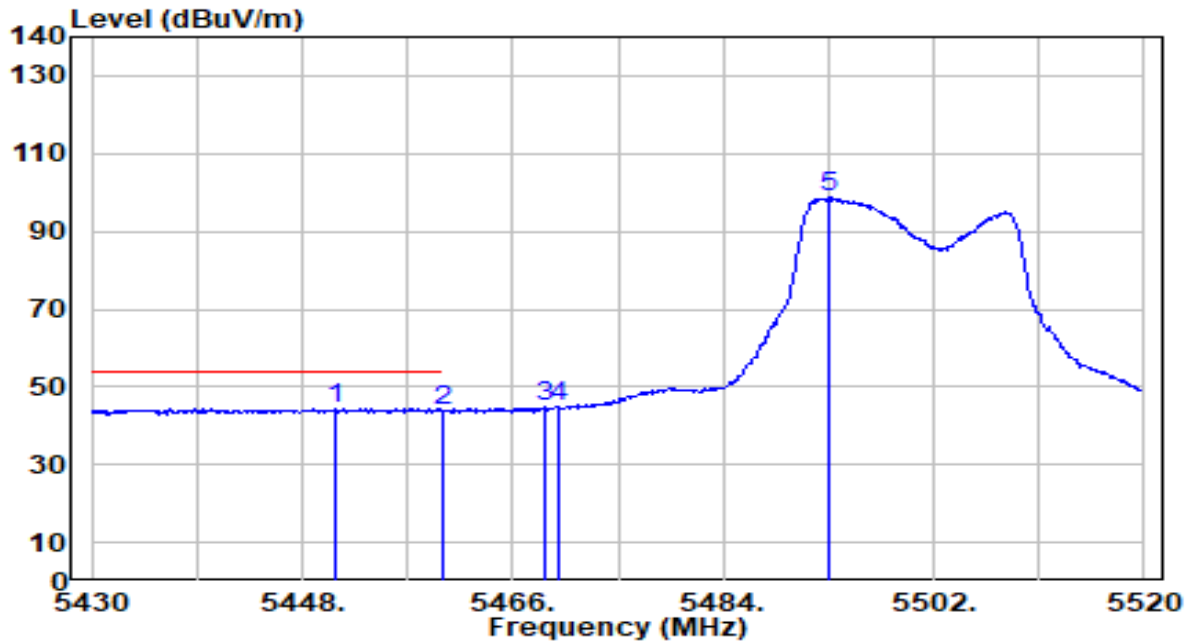


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.790	43.81	0.62	44.43	-9.57	54.00	200	316	Average
2		5460.000	43.18	0.66	43.84	-10.16	54.00	200	316	Average
3		5468.790	44.22	0.70	44.92	N/A	N/A	200	316	Average
4		5470.000	44.26	0.71	44.96	N/A	N/A	200	316	Average
5		5493.000	97.87	0.81	98.67	N/A	N/A	200	316	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

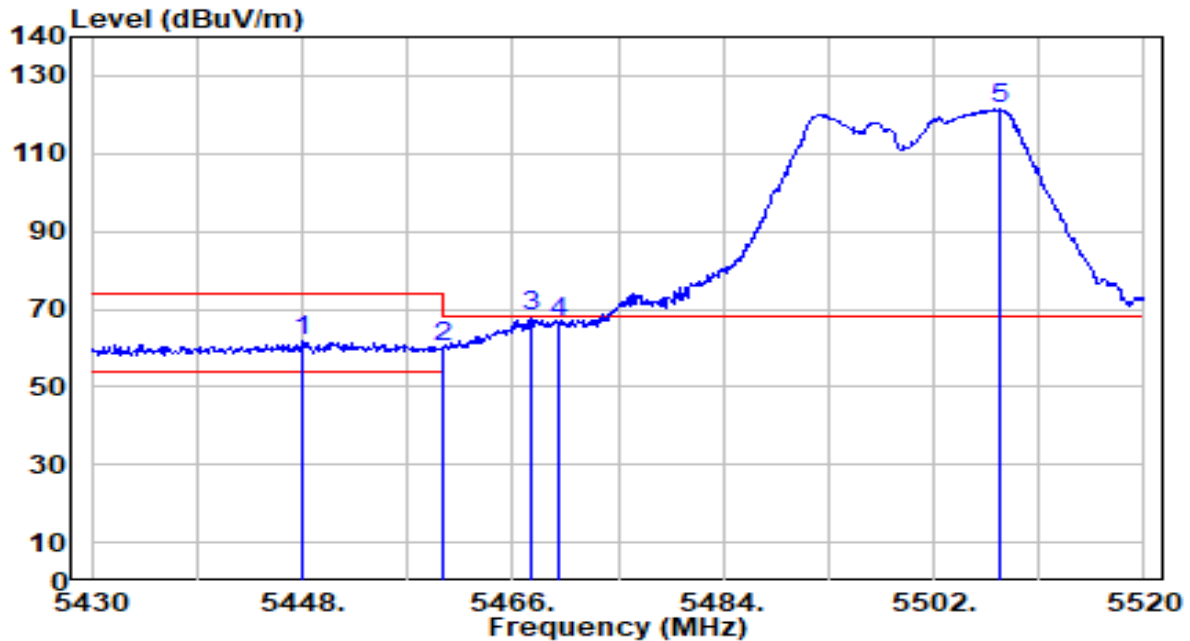


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.000	61.41	0.61	62.02	-11.98	74.00	150	166	Peak
2	5460.000	59.52	0.66	60.18	-13.82	74.00	150	166	Peak
3	* 5467.530	67.26	0.70	67.95	-0.25	68.20	150	166	Peak
4	5470.000	66.05	0.71	66.75	-1.45	68.20	150	166	Peak
5	5507.580	120.39	0.88	121.26	N/A	N/A	150	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

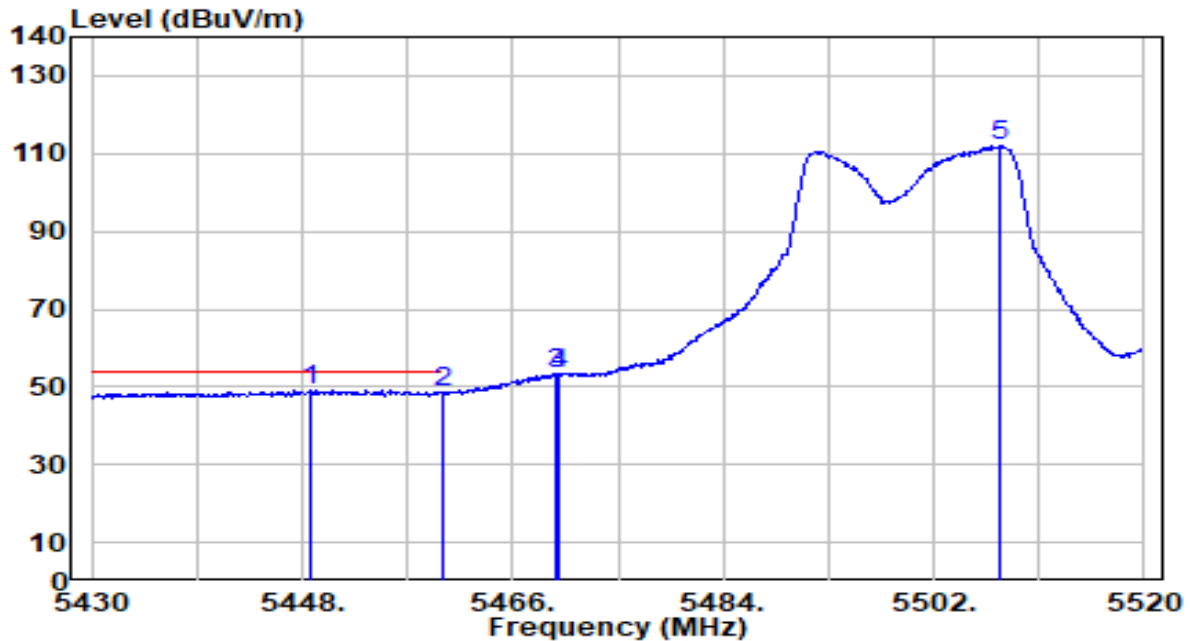


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.720	48.61	0.61	49.22	-4.78	54.00	150	166	Average
2		5460.000	47.88	0.66	48.54	-5.46	54.00	150	166	Average
3		5469.780	52.51	0.71	53.21	N/A	N/A	150	166	Peak
4		5470.000	52.39	0.71	53.10	N/A	N/A	150	166	Average
5		5507.670	111.16	0.88	112.03	N/A	N/A	150	166	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

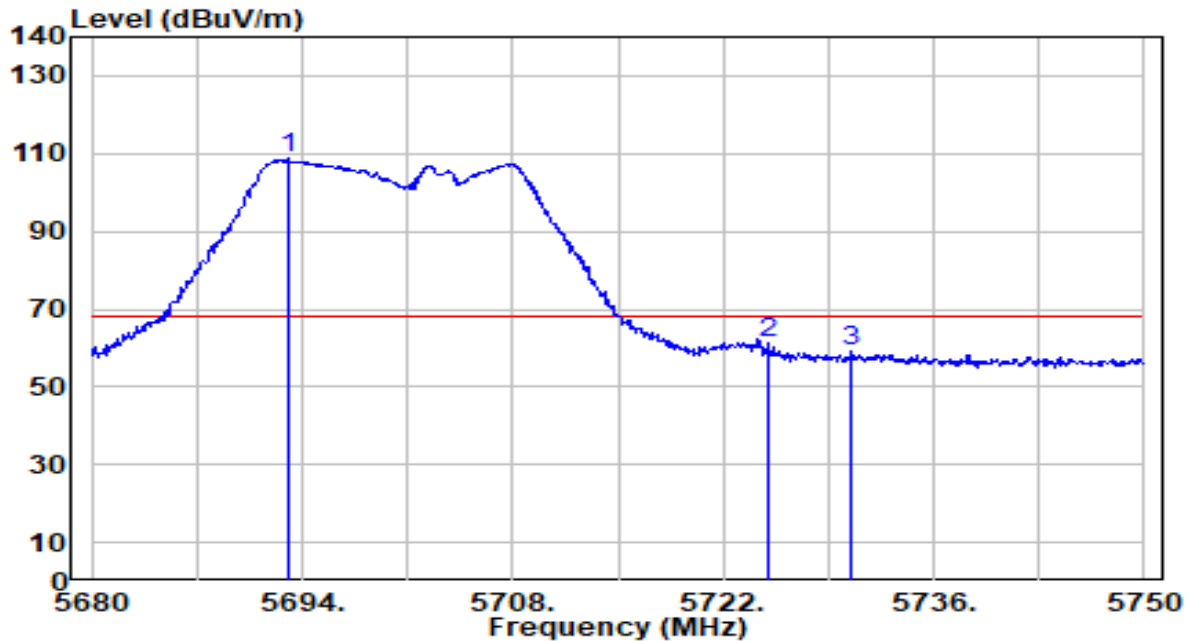


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5693.020	107.00	1.74	108.75	N/A	N/A	200	317	Peak
2	* 5725.000	59.44	1.89	61.33	-6.87	68.20	200	317	Peak
3	5730.540	57.13	1.92	59.04	-9.16	68.20	200	317	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

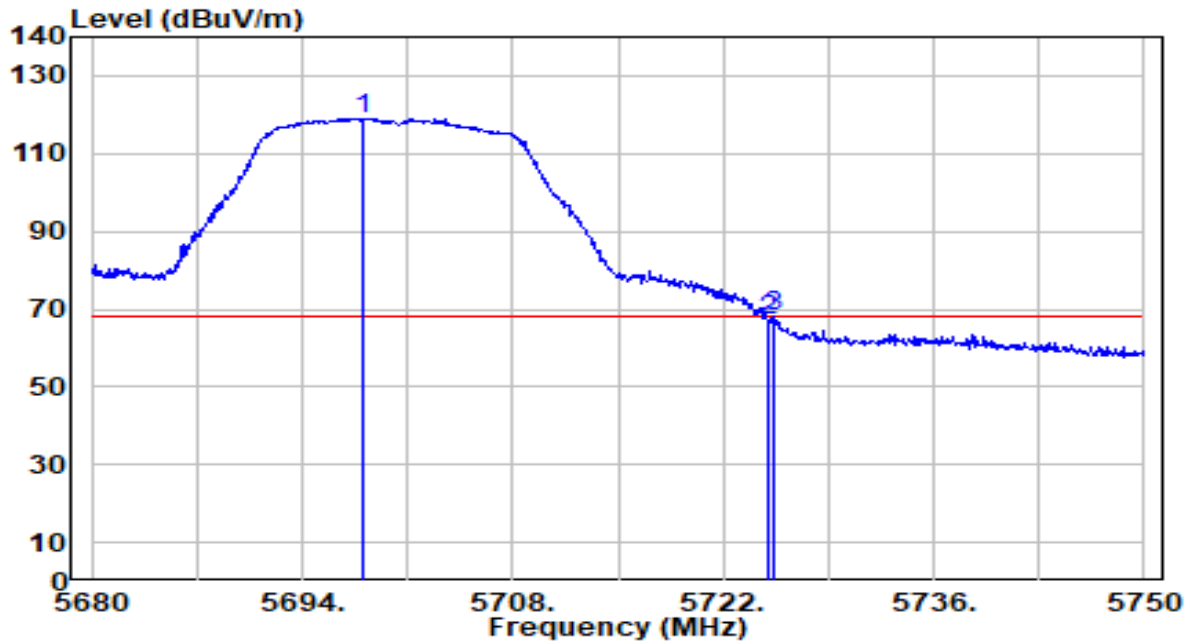


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.060	117.24	1.77	119.01	N/A	N/A	150	346	Peak
2	5725.000	65.40	1.89	67.30	-0.90	68.20	150	346	Peak
3	* 5725.360	66.13	1.89	68.02	-0.18	68.20	150	346	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

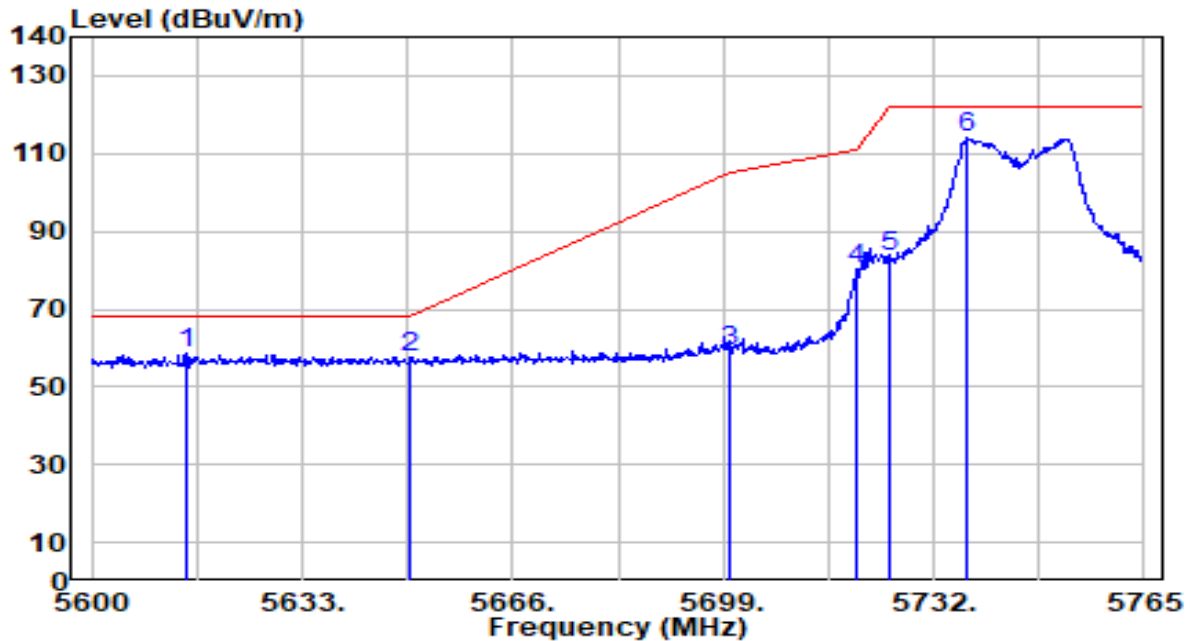


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5614.685	57.17	1.38	58.55	-9.65	68.20	100	174	Peak
2		5650.000	55.98	1.54	57.53	-10.67	68.20	100	174	Peak
3		5700.000	57.45	1.78	59.23	-45.97	105.20	100	174	Peak
4		5720.000	78.45	1.87	80.32	-30.48	110.80	100	174	Peak
5		5725.000	81.70	1.89	83.59	-38.61	122.20	100	174	Peak
6		5737.280	111.90	1.95	113.85	N/A	N/A	100	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

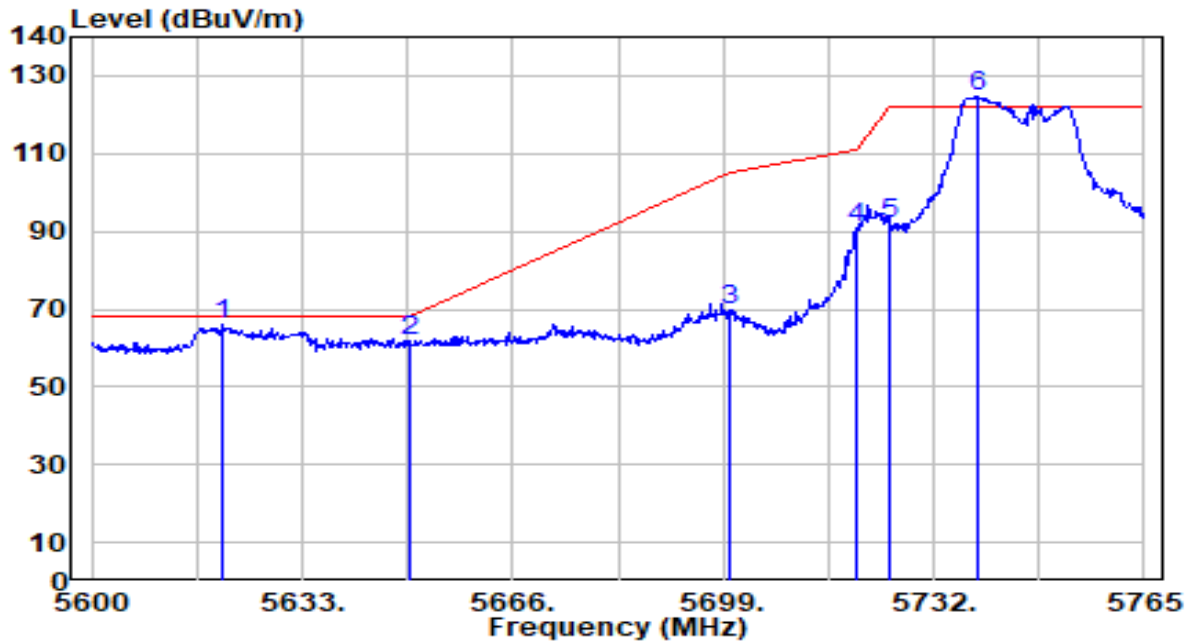


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5620.625	64.40	1.40	65.81	-2.39	68.20	100	351	Peak
2		5650.000	60.33	1.54	61.88	-6.32	68.20	100	351	Peak
3		5700.000	67.85	1.78	69.63	-35.57	105.20	100	351	Peak
4		5720.000	88.80	1.87	90.67	-20.13	110.80	100	351	Peak
5		5725.000	89.90	1.89	91.79	-30.41	122.20	100	351	Peak
6		5738.765	122.63	1.96	124.59	N/A	N/A	100	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

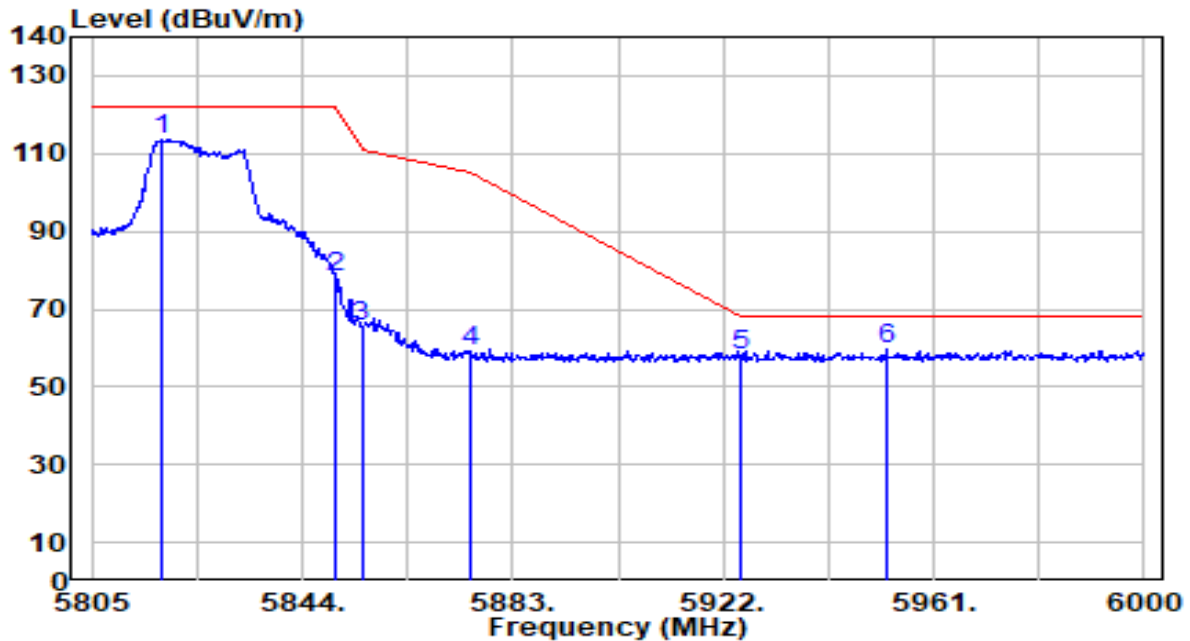


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5818.065	111.31	2.25	113.56	N/A	N/A	100	219	Peak
2	5850.000	75.76	2.25	78.01	-44.19	122.20	100	219	Peak
3	5855.000	63.46	2.25	65.71	-45.09	110.80	100	219	Peak
4	5875.000	57.04	2.26	59.30	-45.90	105.20	100	219	Peak
5	5925.000	55.68	2.27	57.95	-10.25	68.20	100	219	Peak
6	* 5952.225	57.26	2.27	59.53	-8.67	68.20	100	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

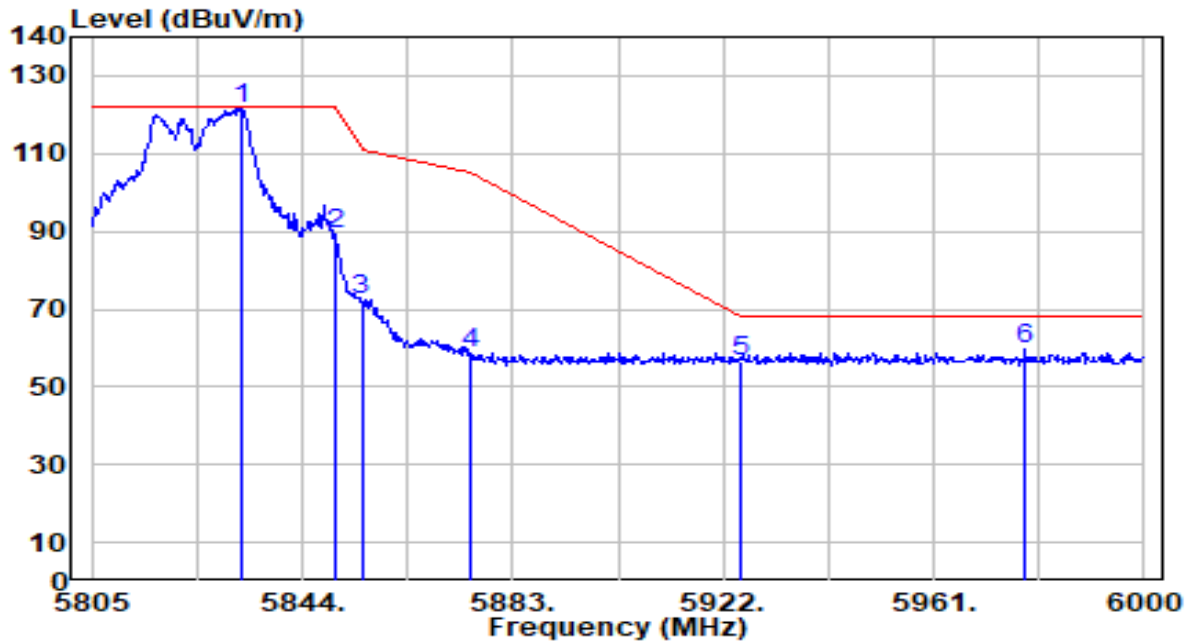


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5832.690	119.32	2.25	121.57	N/A	N/A	200	78	Peak
2	5850.000	86.80	2.25	89.05	-33.15	122.20	200	78	Peak
3	5855.000	70.14	2.25	72.39	-38.41	110.80	200	78	Peak
4	5875.000	56.63	2.26	58.89	-46.31	105.20	200	78	Peak
5	5925.000	54.36	2.27	56.62	-11.58	68.20	200	78	Peak
6	* 5977.965	57.54	2.28	59.82	-8.38	68.20	200	78	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

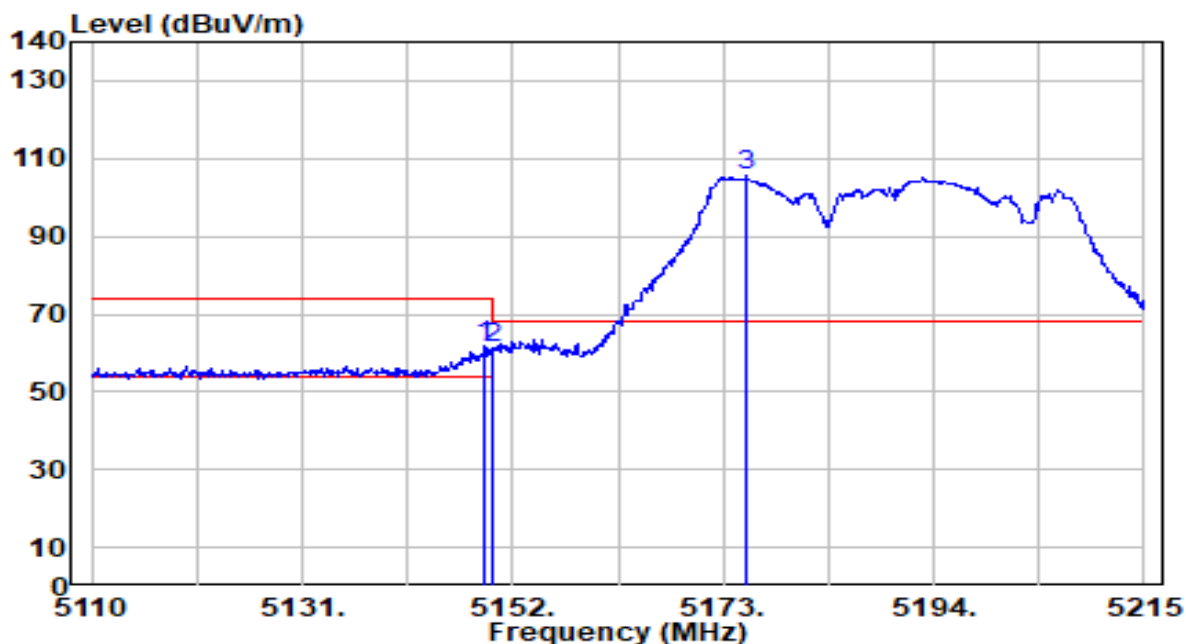


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.270	61.21	0.65	61.86	-12.14	74.00	201	18	Peak
2		5150.000	60.84	0.65	61.49	-12.51	74.00	201	18	Peak
3		5175.415	104.91	0.68	105.59	N/A	N/A	201	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

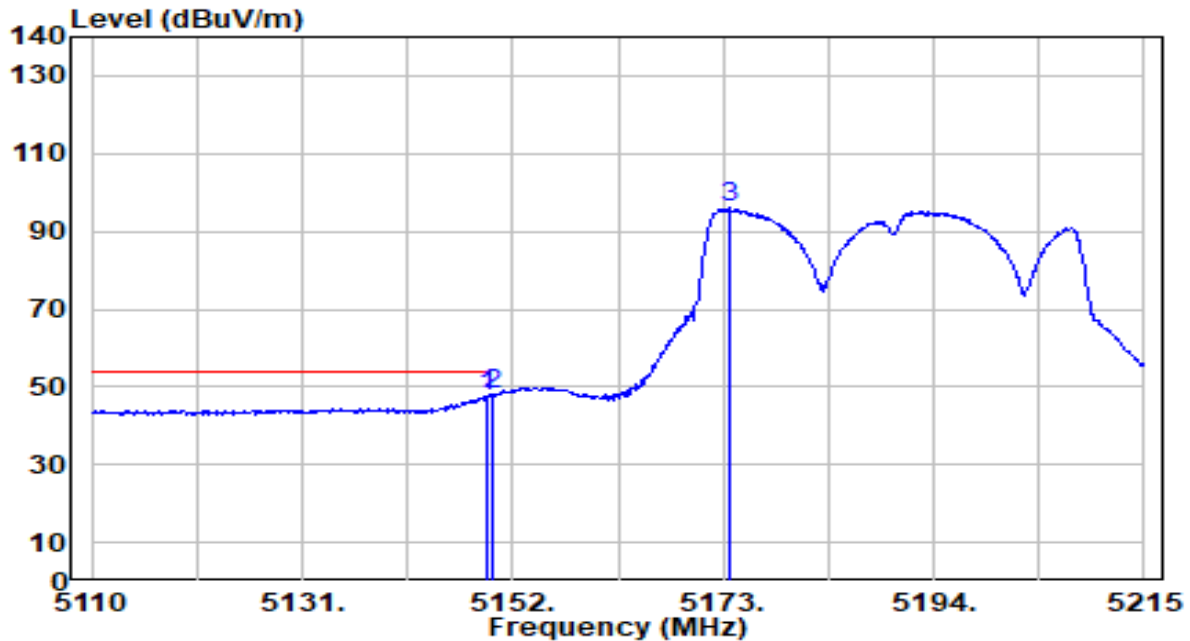


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.480	46.65	0.65	47.30	-6.70	54.00	201	18	Average
2	*	5150.000	47.32	0.65	47.97	-6.03	54.00	201	18	Average
3		5173.630	95.24	0.68	95.92	N/A	N/A	201	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

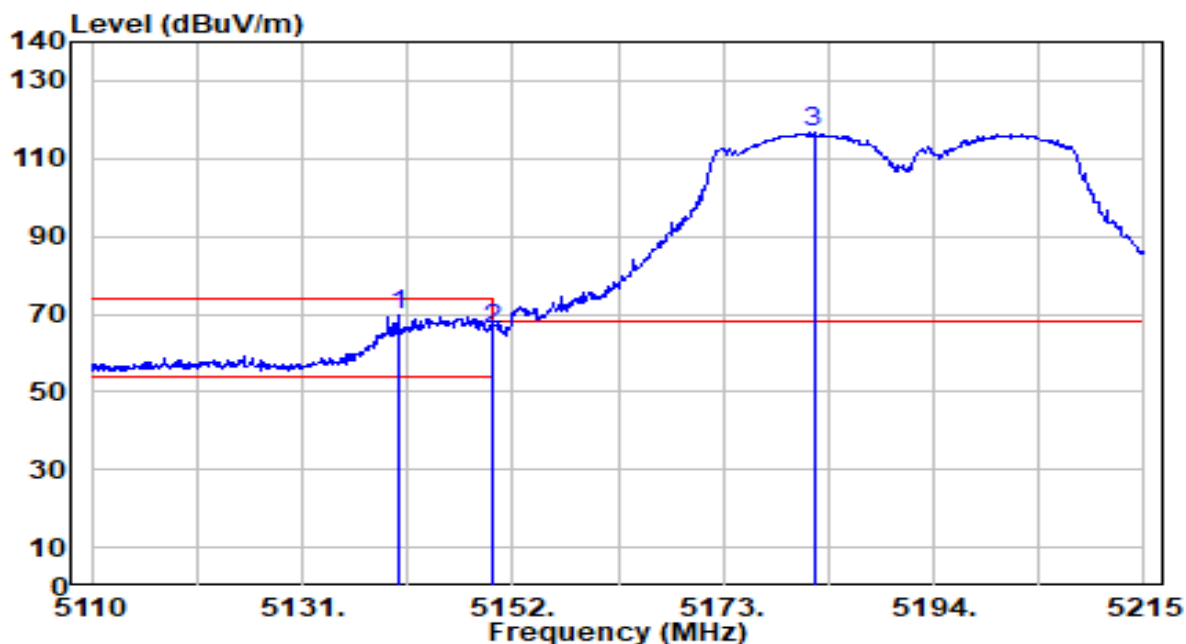


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.660	69.00	0.65	69.65	-4.35	74.00	150	348	Peak
2		5150.000	65.43	0.65	66.08	-7.92	74.00	150	348	Peak
3		5182.030	116.16	0.68	116.85	N/A	N/A	150	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

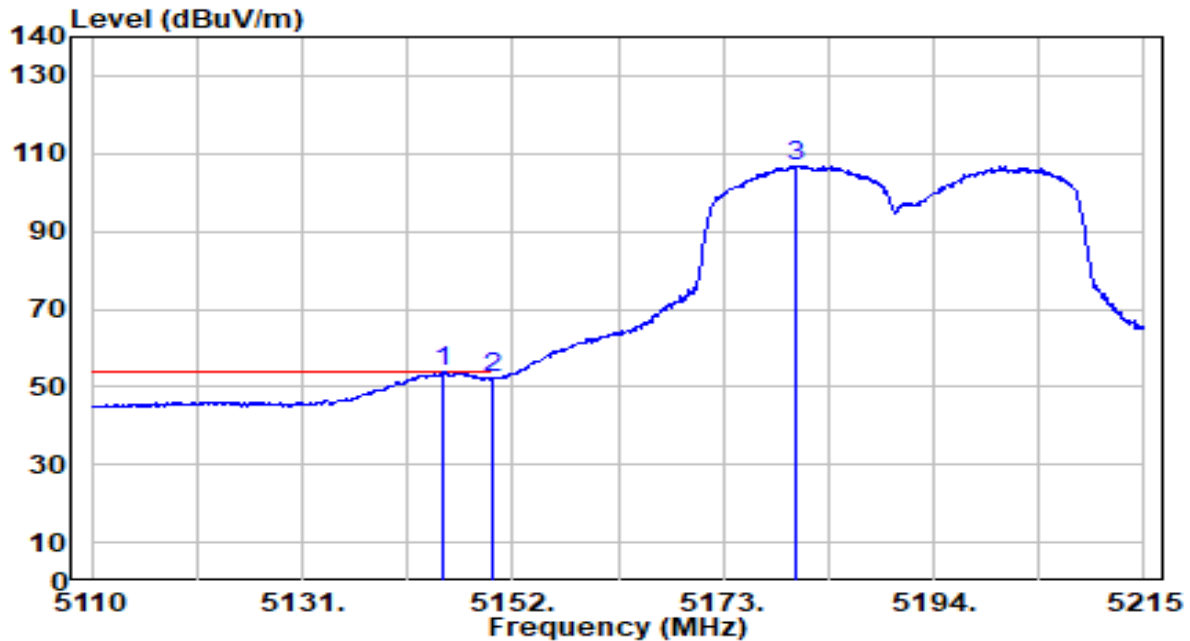


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.070	53.07	0.65	53.72	-0.28	54.00	150	348	Average
2		5150.000	51.47	0.65	52.13	-1.87	54.00	150	348	Average
3		5180.245	106.22	0.68	106.90	N/A	N/A	150	348	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

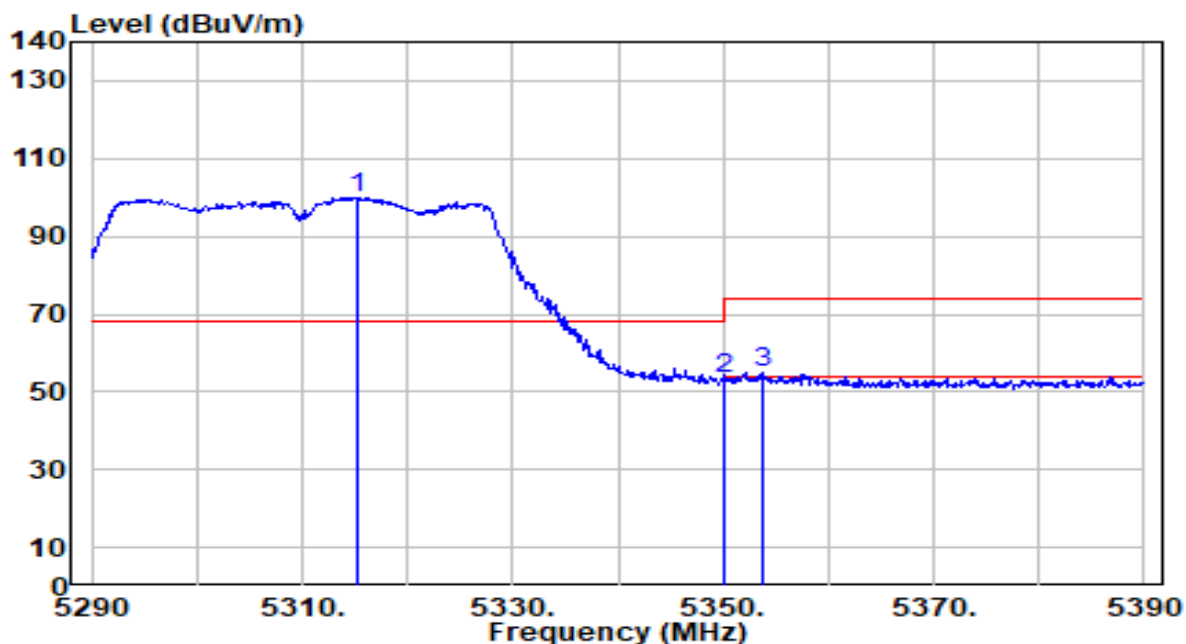


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.300	99.42	0.52	99.95	N/A	N/A	200	14	Peak
2	5350.000	52.87	0.47	53.34	-20.66	74.00	200	14	Peak
3	* 5353.700	54.57	0.47	55.04	-18.96	74.00	200	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

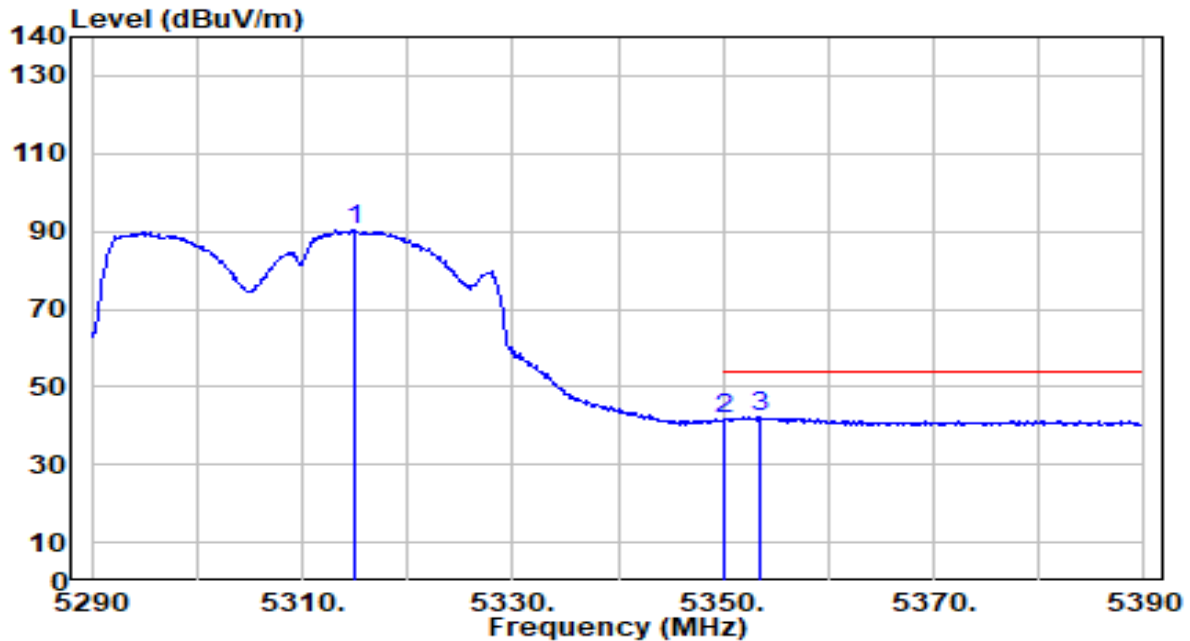


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.900	89.82	0.53	90.35	N/A	N/A	200	14	Average
2	5350.000	41.01	0.47	41.49	-12.51	54.00	200	14	Average
3	* 5353.400	41.62	0.47	42.09	-11.91	54.00	200	14	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

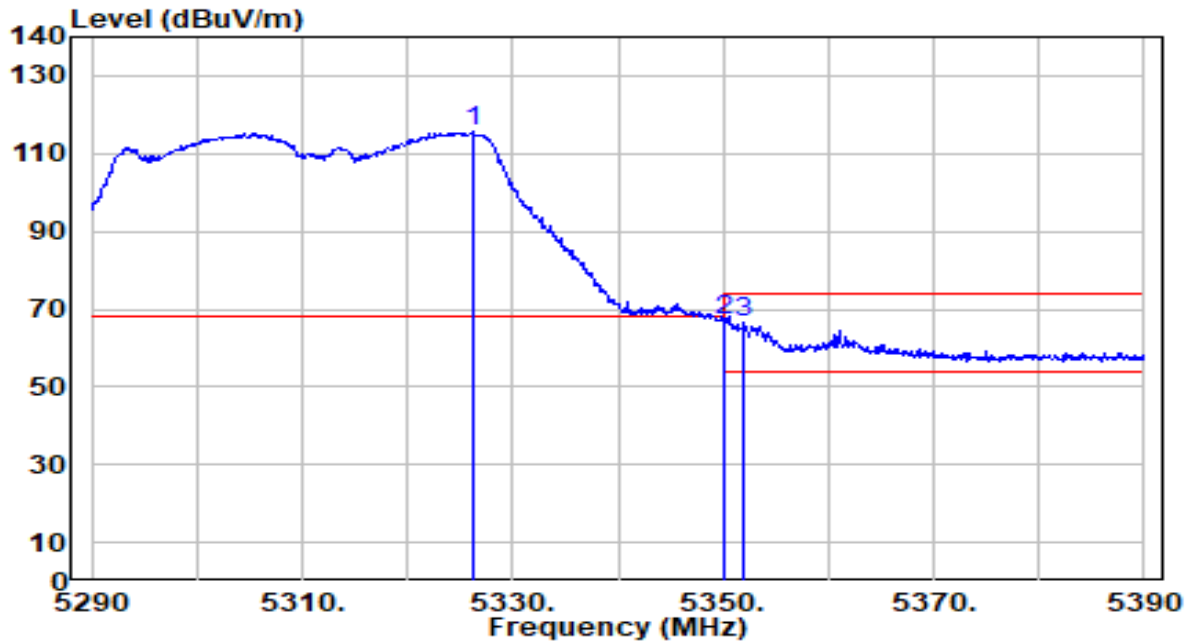


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5326.300	115.19	0.51	115.69	N/A	N/A	150	346	Peak
2	*	5350.000	66.89	0.47	67.36	-6.64	74.00	150	346	Peak
3		5351.900	66.05	0.47	66.51	-7.49	74.00	150	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

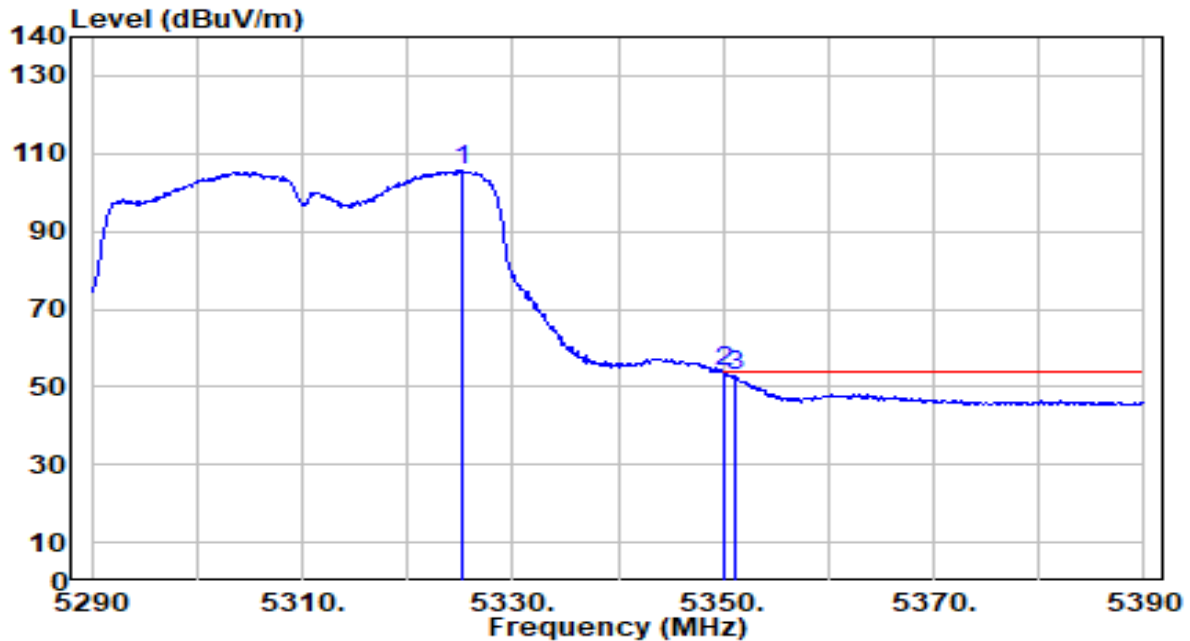


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5325.300	105.29	0.51	105.80	N/A	N/A	150	346	Average
2	*	5350.000	53.26	0.47	53.73	-0.27	54.00	150	346	Average
3		5351.200	52.30	0.47	52.77	-1.23	54.00	150	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

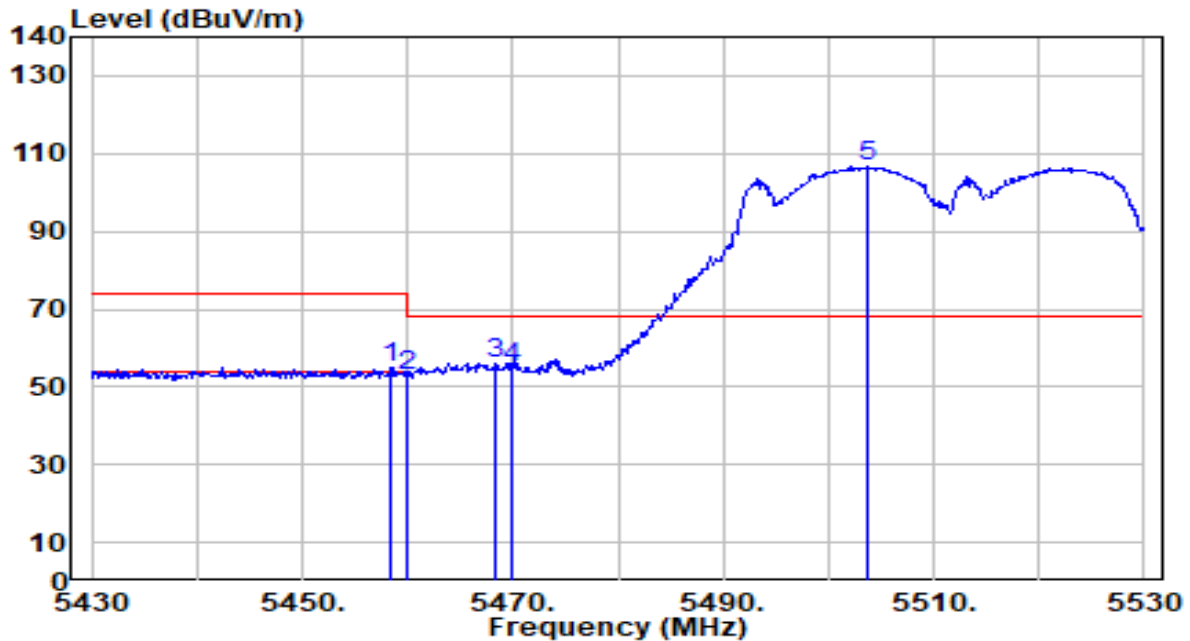


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.400	54.25	0.65	54.90	-19.10	74.00	233	152	Peak
2	5460.000	52.25	0.66	52.91	-21.09	74.00	233	152	Peak
3	* 5468.400	55.50	0.70	56.20	-12.00	68.20	233	152	Peak
4	5470.000	54.37	0.71	55.08	-13.12	68.20	233	152	Peak
5	5503.700	105.75	0.86	106.61	N/A	N/A	233	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

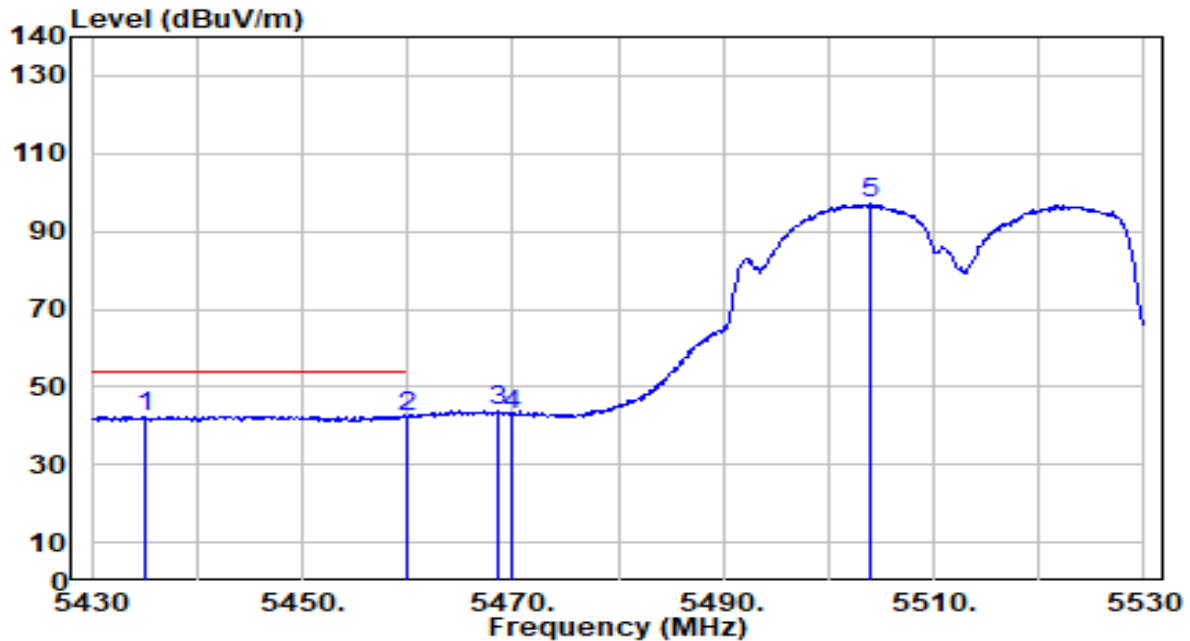


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5435.100	41.97	0.55	42.52	-11.48	54.00	233	152	Average
2		5460.000	41.77	0.66	42.43	-11.57	54.00	233	152	Average
3		5468.500	43.07	0.70	43.77	N/A	N/A	233	152	Average
4		5470.000	41.99	0.71	42.69	N/A	N/A	233	152	Average
5		5504.100	96.14	0.86	97.00	N/A	N/A	233	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

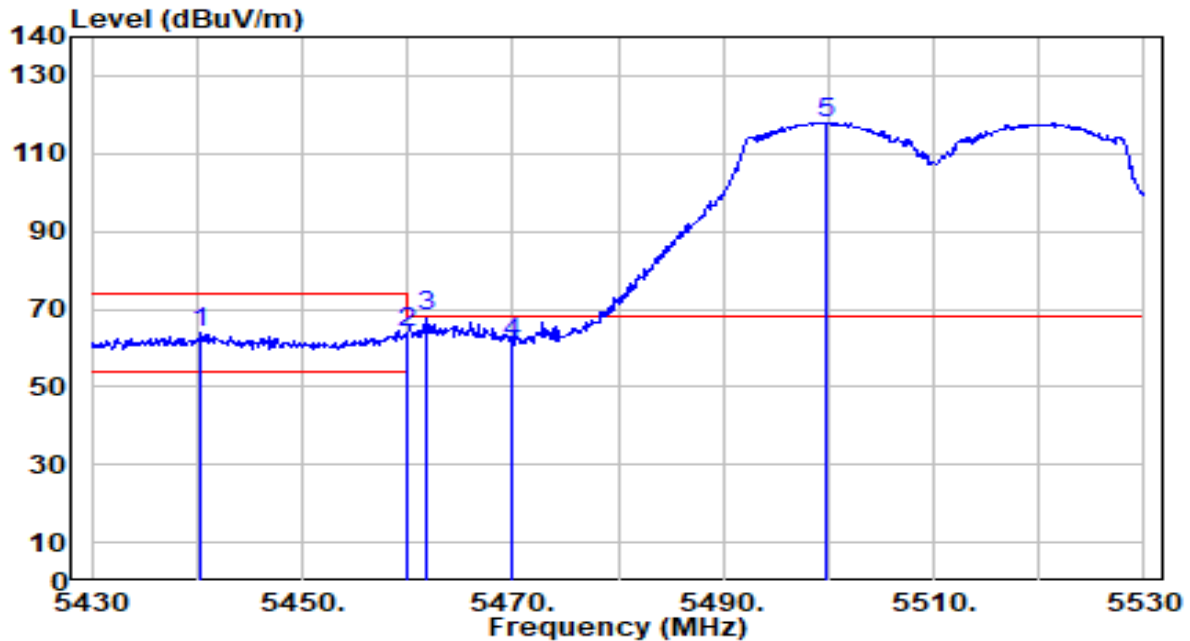


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5440.400	63.48	0.57	64.06	-9.94	74.00	113	347	Peak
2	5460.000	63.04	0.66	63.70	-10.30	74.00	113	347	Peak
3	* 5461.700	67.33	0.67	68.00	-0.20	68.20	113	347	Peak
4	5470.000	60.55	0.71	61.25	-6.95	68.20	113	347	Peak
5	5499.700	117.19	0.84	118.03	N/A	N/A	113	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

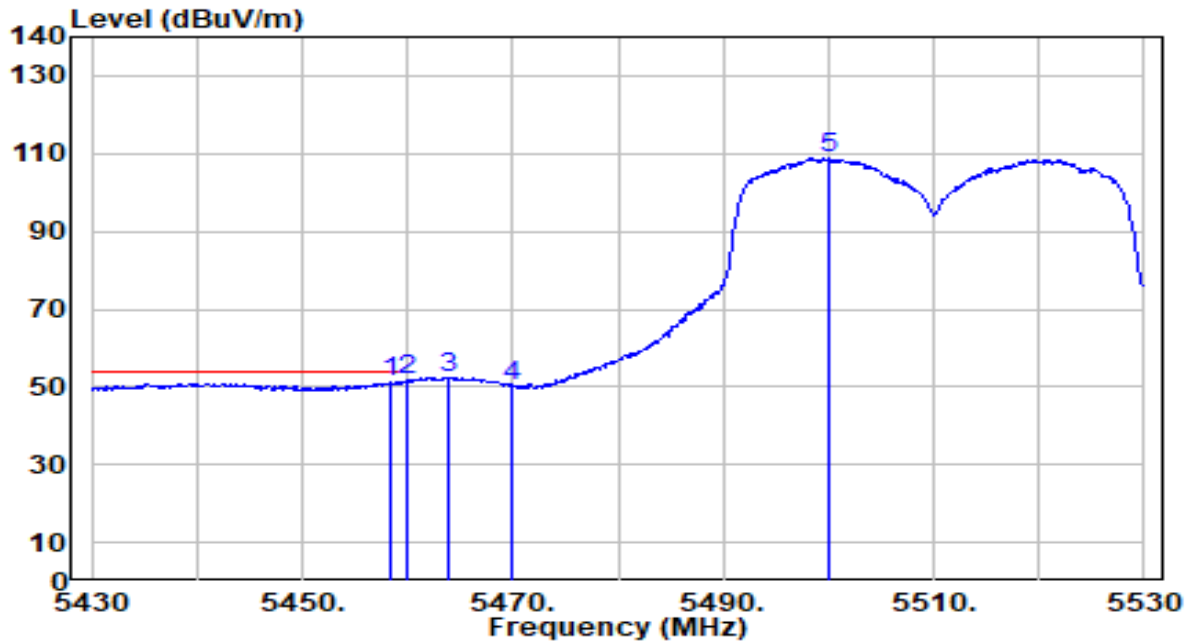


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.300	50.48	0.65	51.14	-2.86	54.00	113	347	Average
2	*	5460.000	51.03	0.66	51.69	-2.31	54.00	113	347	Average
3		5463.900	51.81	0.68	52.49	N/A	N/A	113	347	Average
4		5470.000	49.36	0.71	50.07	N/A	N/A	113	347	Average
5		5500.100	107.78	0.84	108.63	N/A	N/A	113	347	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

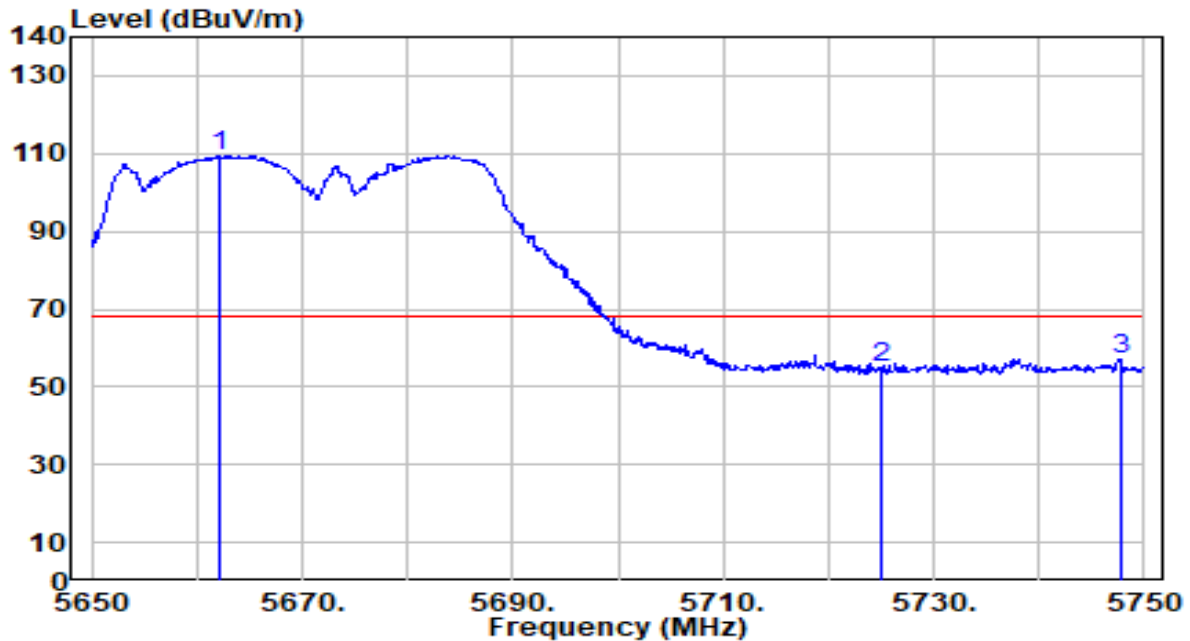


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5662.100	107.75	1.60	109.35	N/A	N/A	234	296	Peak
2	5725.000	52.96	1.89	54.85	-13.35	68.20	234	296	Peak
3	* 5747.700	55.06	2.00	57.06	-11.14	68.20	234	296	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band 3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

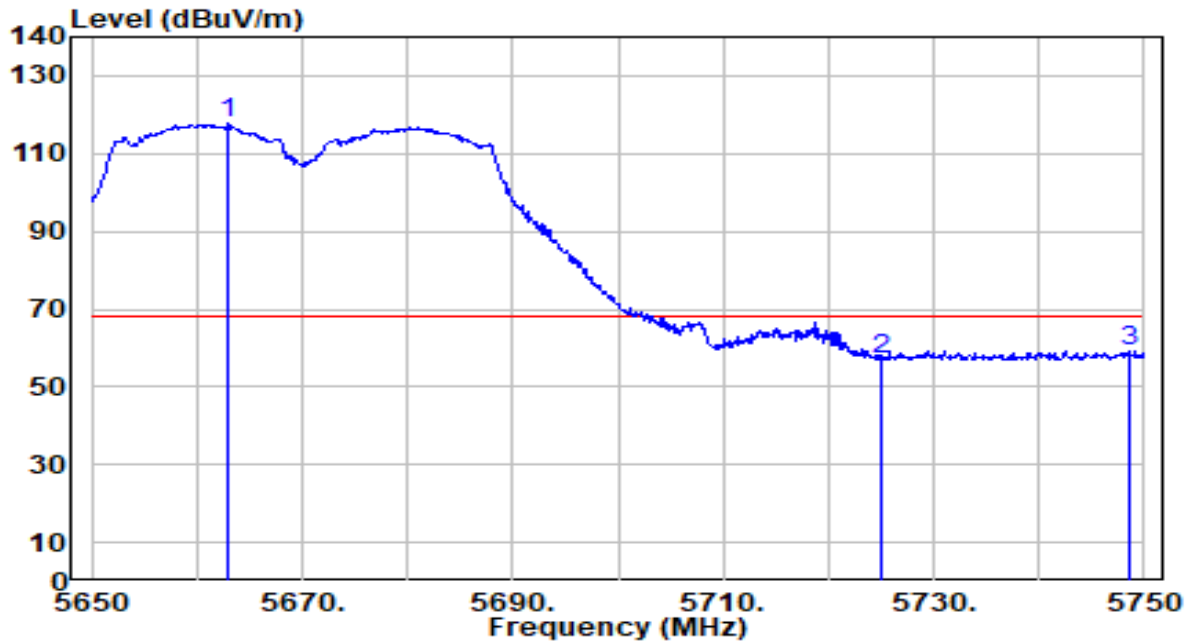


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5663.000	115.96	1.60	117.56	N/A	N/A	100	354	Peak
2	5725.000	55.31	1.89	57.20	-11.00	68.20	100	354	Peak
3	* 5748.700	57.41	2.00	59.41	-8.79	68.20	100	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

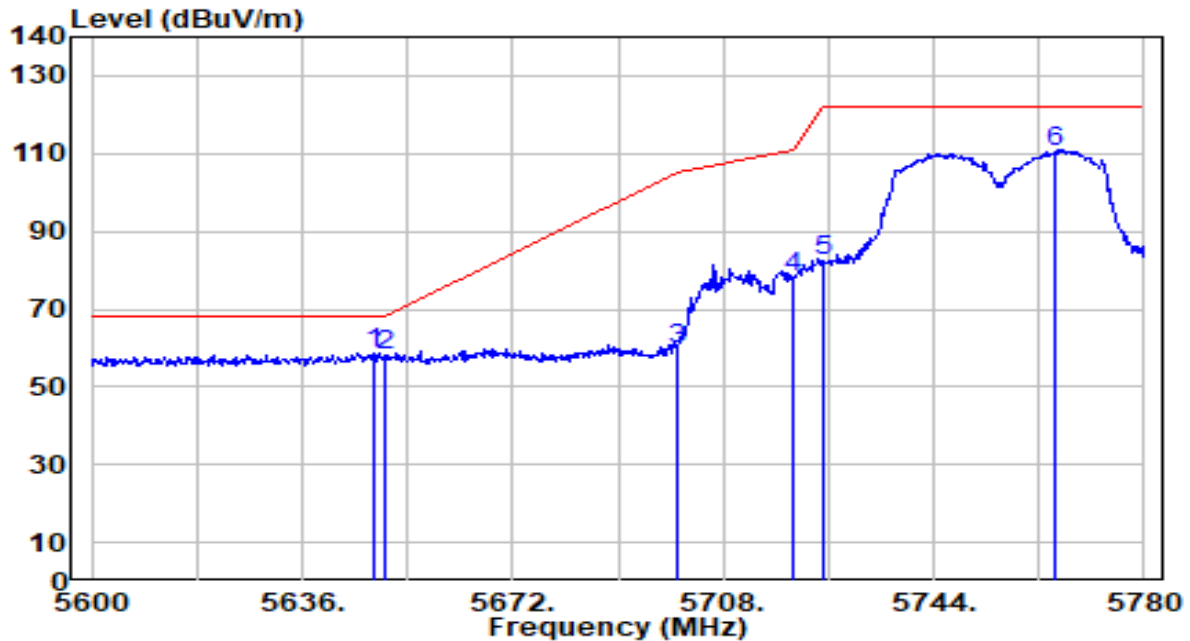


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.420	57.17	1.53	58.71	-9.49	68.20	100	174	Peak
2		5650.000	56.63	1.54	58.17	-10.03	68.20	100	174	Peak
3		5700.000	58.00	1.78	59.77	-45.43	105.20	100	174	Peak
4		5720.000	76.35	1.87	78.22	-32.58	110.80	100	174	Peak
5		5725.000	80.48	1.89	82.37	-39.83	122.20	100	174	Peak
6		5764.880	108.30	2.08	110.38	N/A	N/A	100	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

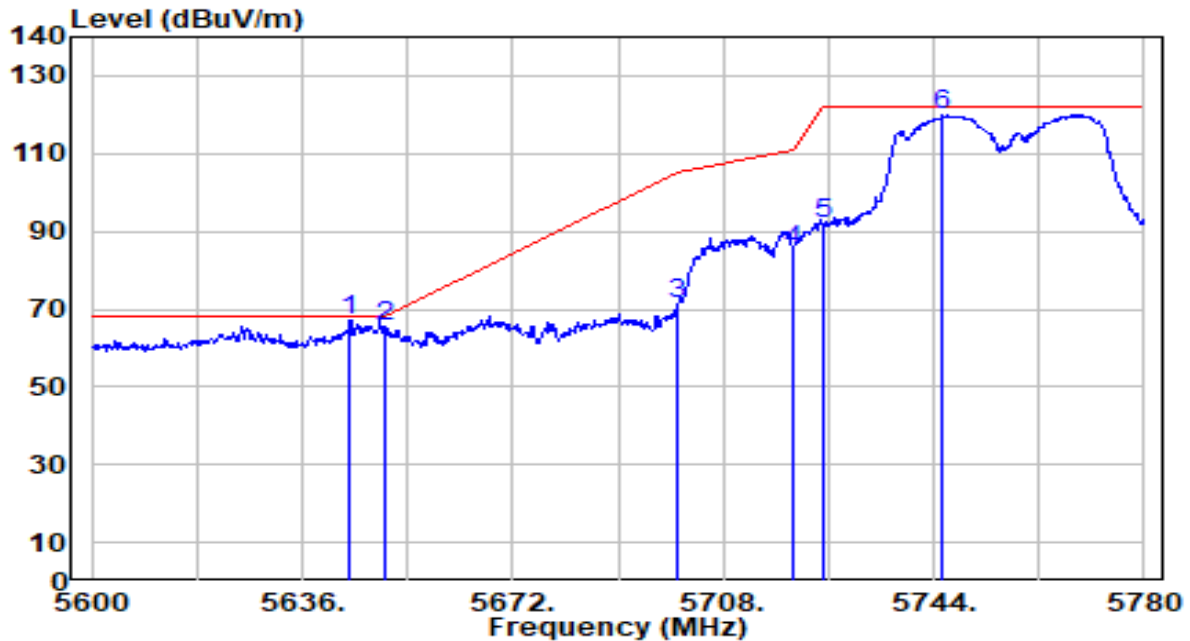


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.100	65.53	1.51	67.05	-1.15	68.20	100	351	Peak
2		5650.000	63.92	1.54	65.47	-2.73	68.20	100	351	Peak
3		5700.000	69.77	1.78	71.54	-33.66	105.20	100	351	Peak
4		5720.000	83.44	1.87	85.31	-25.49	110.80	100	351	Peak
5		5725.000	89.91	1.89	91.80	-30.40	122.20	100	351	Peak
6		5745.620	117.71	1.99	119.70	N/A	N/A	100	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

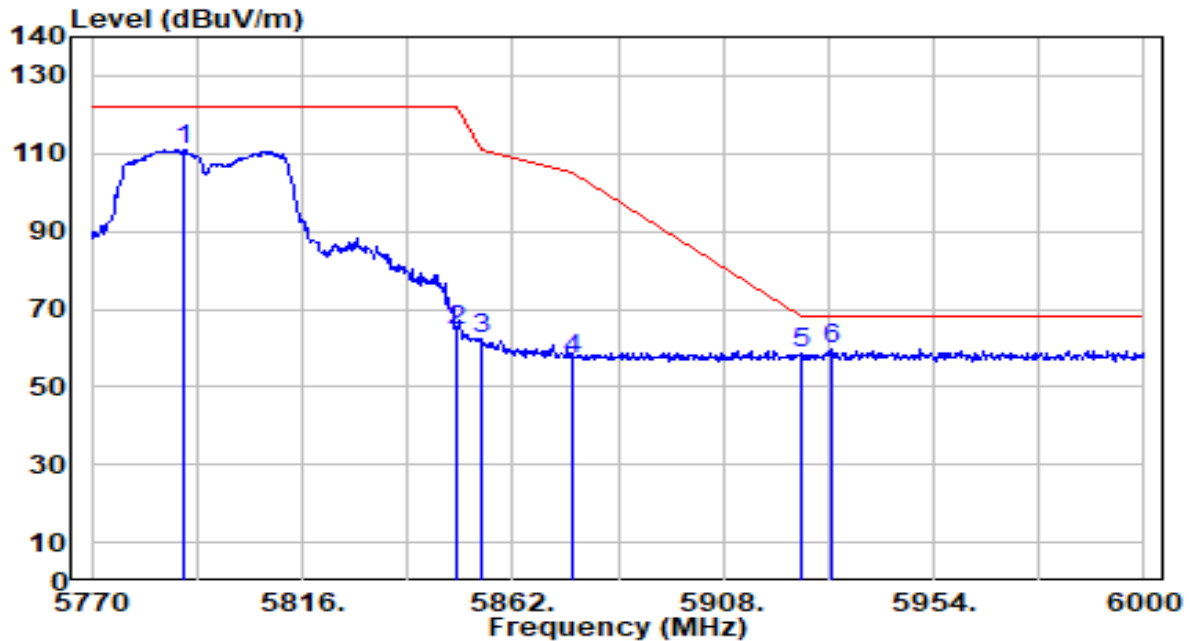


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.240	108.89	2.20	111.09	N/A	N/A	100	219	Peak
2	5850.000	62.27	2.25	64.52	-57.68	122.20	100	219	Peak
3	5855.000	59.94	2.25	62.19	-48.61	110.80	100	219	Peak
4	5875.000	54.66	2.26	56.92	-48.28	105.20	100	219	Peak
5	5925.000	56.64	2.27	58.90	-9.30	68.20	100	219	Peak
6	* 5931.920	57.34	2.27	59.61	-8.59	68.20	100	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

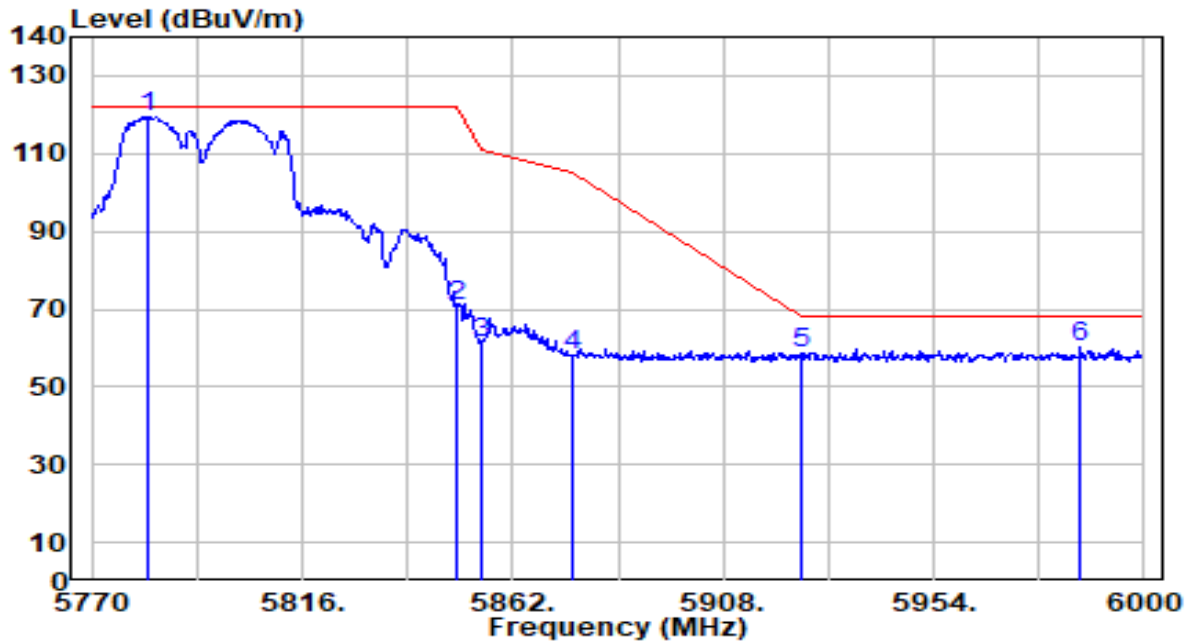


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5782.190	117.46	2.16	119.62	N/A	N/A	200	78	Peak
2	5850.000	68.65	2.25	70.90	-51.30	122.20	200	78	Peak
3	5855.000	59.21	2.25	61.46	-49.34	110.80	200	78	Peak
4	5875.000	55.77	2.26	58.03	-47.17	105.20	200	78	Peak
5	5925.000	56.14	2.27	58.40	-9.80	68.20	200	78	Peak
6	* 5986.200	57.99	2.28	60.27	-7.93	68.20	200	78	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band 1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

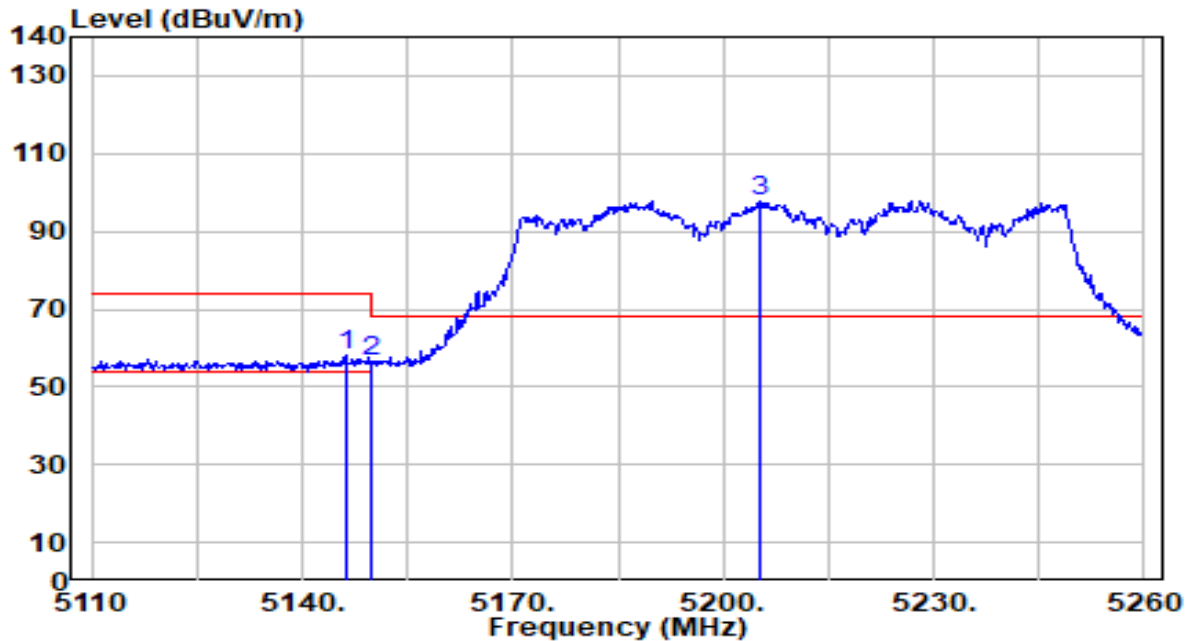


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.300	57.29	0.65	57.94	-16.06	74.00	194	38	Peak
2		5150.000	55.98	0.65	56.64	-17.36	74.00	194	38	Peak
3		5205.100	97.09	0.69	97.78	N/A	N/A	194	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band 1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

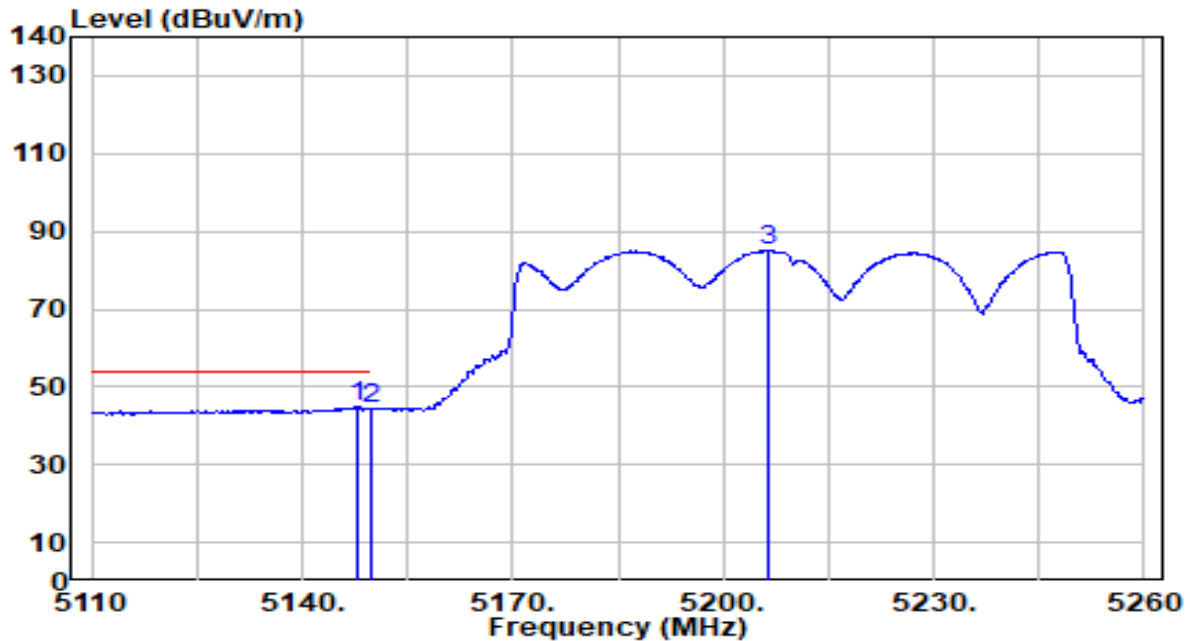


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.950	44.06	0.65	44.72	-9.28	54.00	194	38	Average
2		5150.000	43.61	0.65	44.26	-9.74	54.00	194	38	Average
3		5206.300	84.35	0.69	85.04	N/A	N/A	194	38	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band 1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

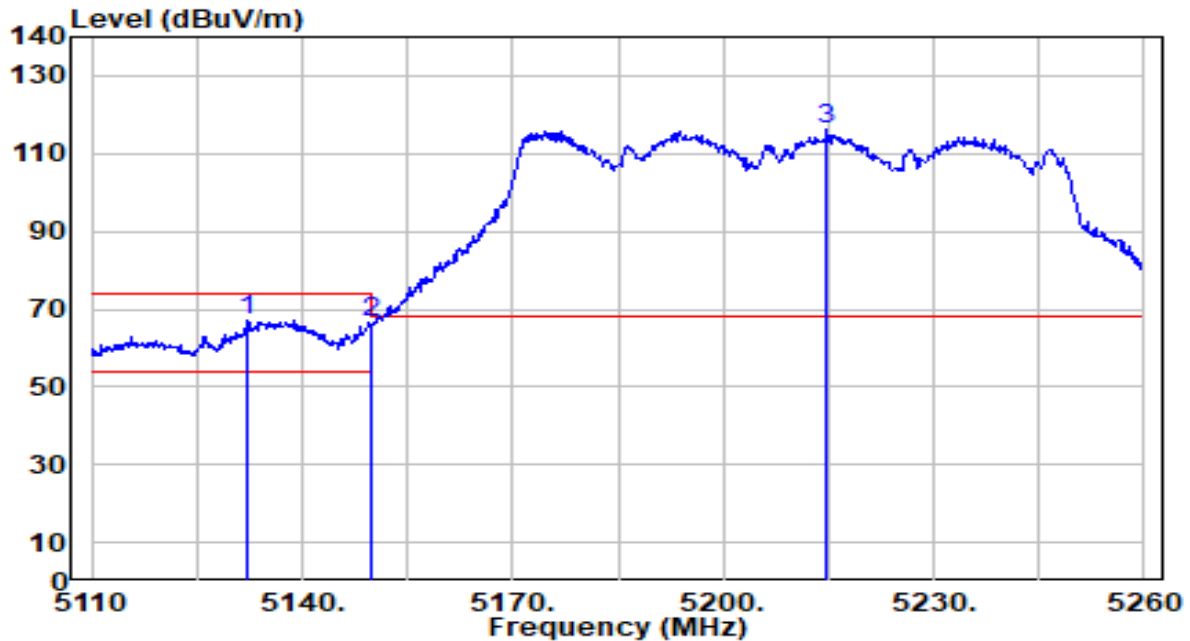


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5132.200	66.68	0.64	67.32	-6.68	74.00	150	352	Peak
2		5150.000	65.98	0.65	66.63	-7.37	74.00	150	352	Peak
3		5214.850	115.47	0.68	116.14	N/A	N/A	150	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band 1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

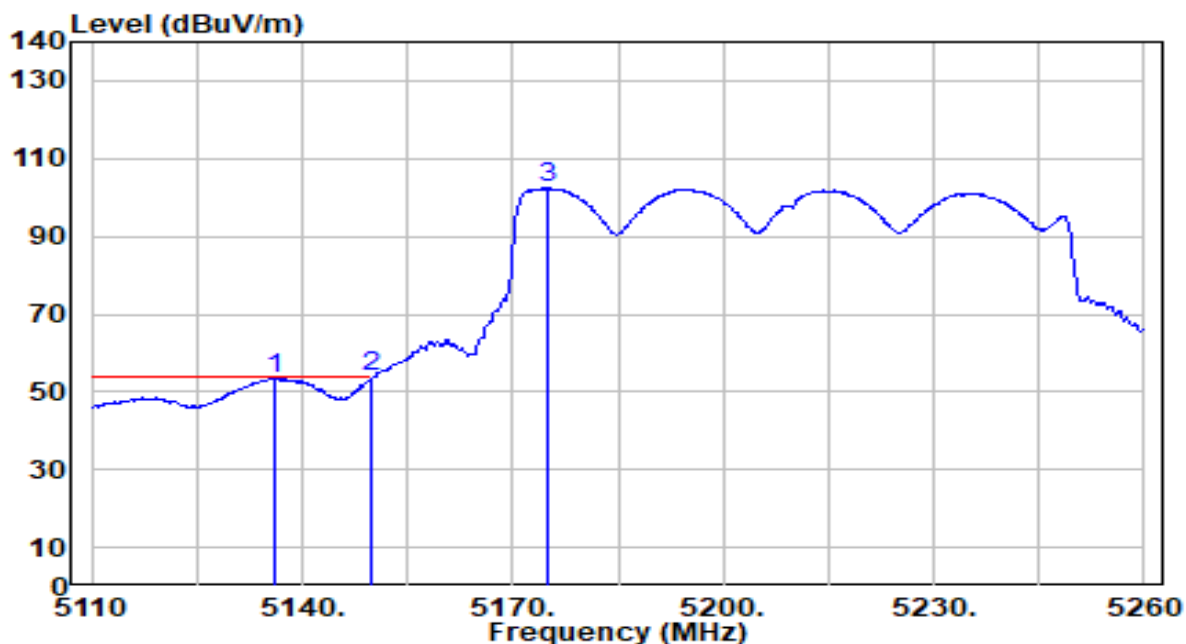


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5135.950	52.81	0.64	53.45	-0.55	54.00	150	352	Average
2	*	5150.000	53.21	0.65	53.87	-0.13	54.00	150	352	Average
3		5175.100	101.80	0.68	102.48	N/A	N/A	150	352	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band 2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

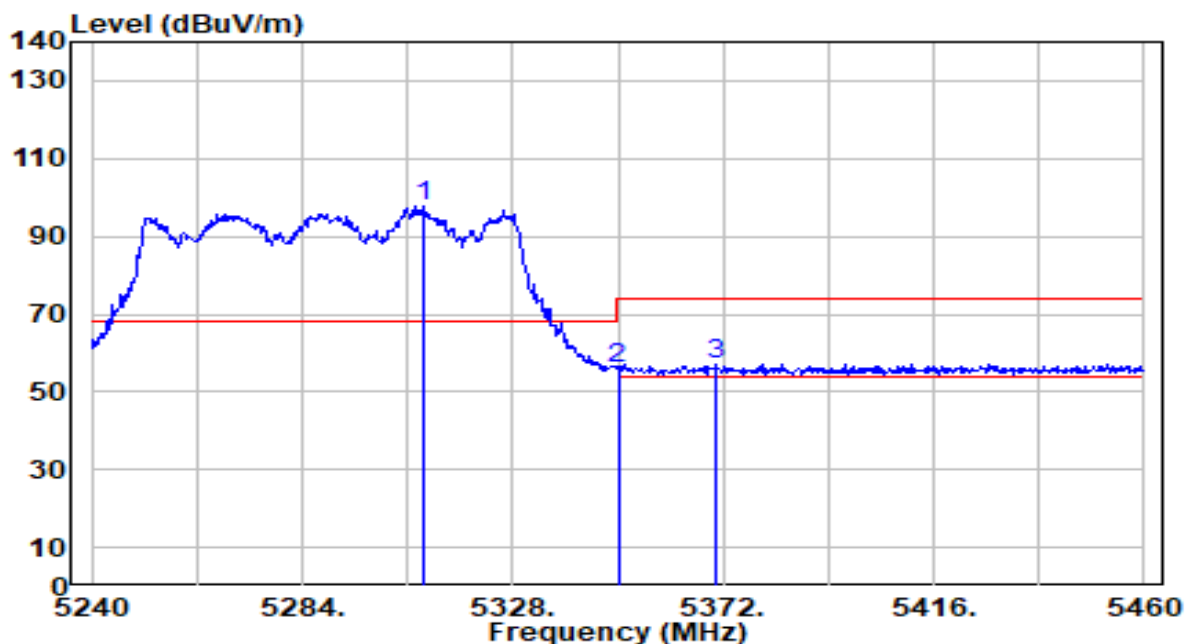


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5309.520	97.10	0.53	97.64	N/A	N/A	180	179	Peak
2	5350.000	55.50	0.47	55.97	-18.03	74.00	180	179	Peak
3	* 5370.460	56.68	0.44	57.12	-16.88	74.00	180	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band 2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

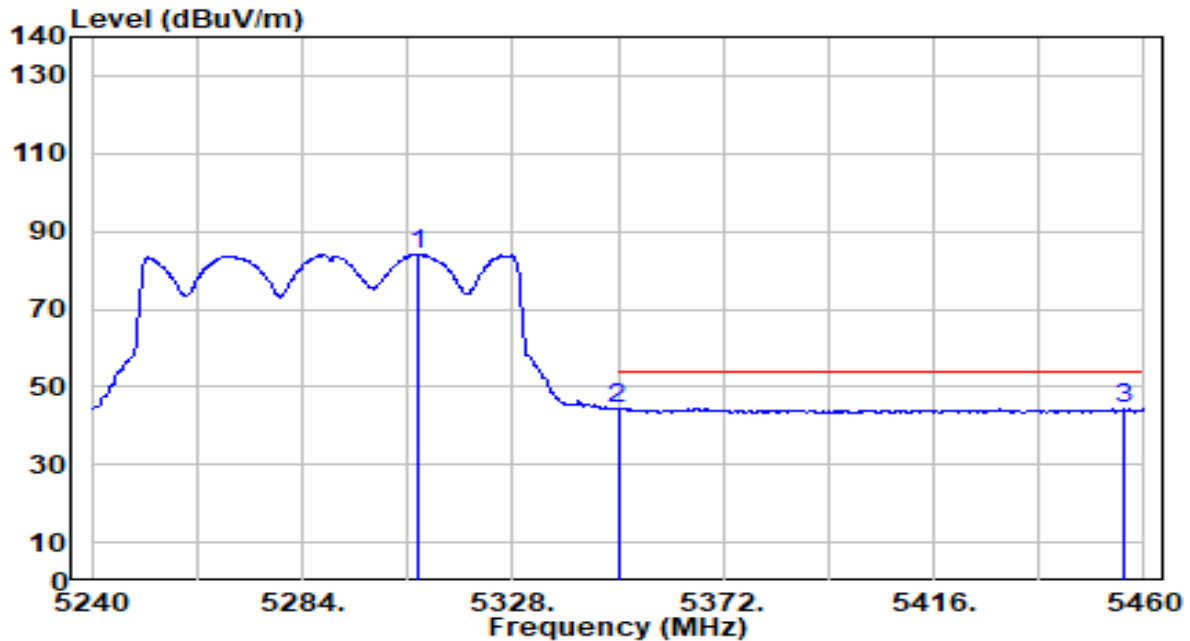


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.200	83.68	0.54	84.21	N/A	N/A	180	179	Average
2	5350.000	43.83	0.47	44.30	-9.70	54.00	180	179	Average
3	* 5456.040	43.73	0.64	44.37	-9.63	54.00	180	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band 2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

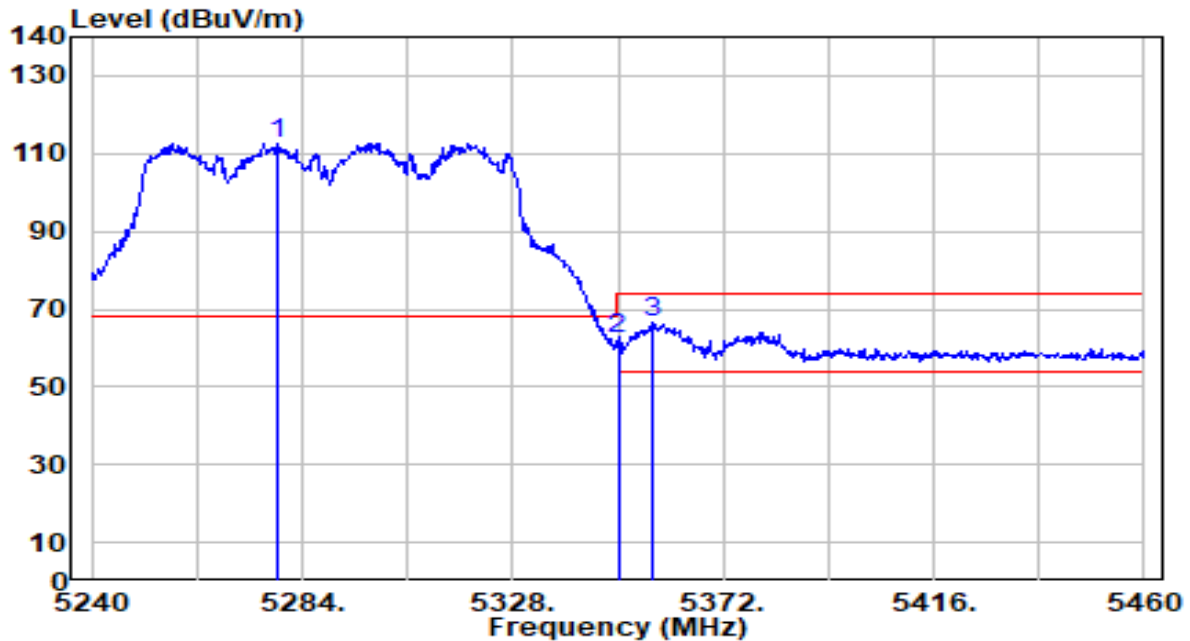


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.940	112.19	0.58	112.77	N/A	N/A	150	347	Peak
2	5350.000	61.81	0.47	62.28	-11.72	74.00	150	347	Peak
3	* 5357.480	66.20	0.46	66.66	-7.34	74.00	150	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band 2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

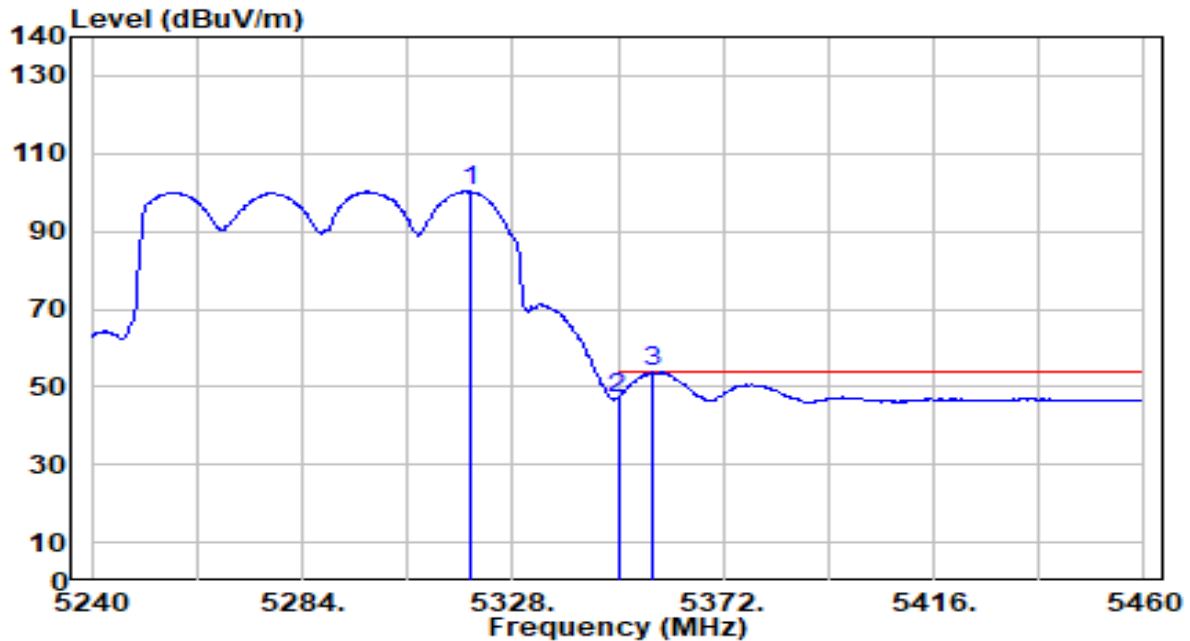


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.200	99.72	0.52	100.24	N/A	N/A	150	347	Average
2	5350.000	46.74	0.47	47.21	-6.79	54.00	150	347	Average
3	* 5357.480	53.38	0.46	53.83	-0.17	54.00	150	347	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band 3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

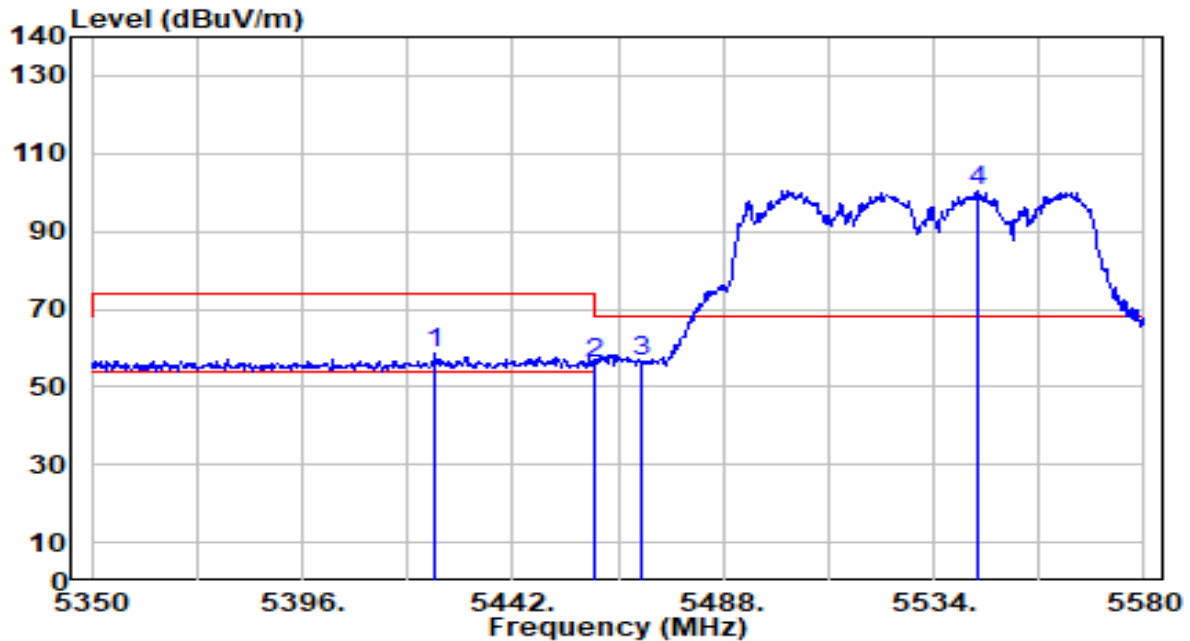


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5425.210	58.00	0.51	58.51	-15.49	74.00	232	152	Peak
2	5460.000	55.33	0.66	55.99	-18.01	74.00	232	152	Peak
3	* 5470.000	55.73	0.71	56.44	-11.76	68.20	232	152	Peak
4	5543.890	99.56	1.05	100.61	N/A	N/A	232	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band 3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

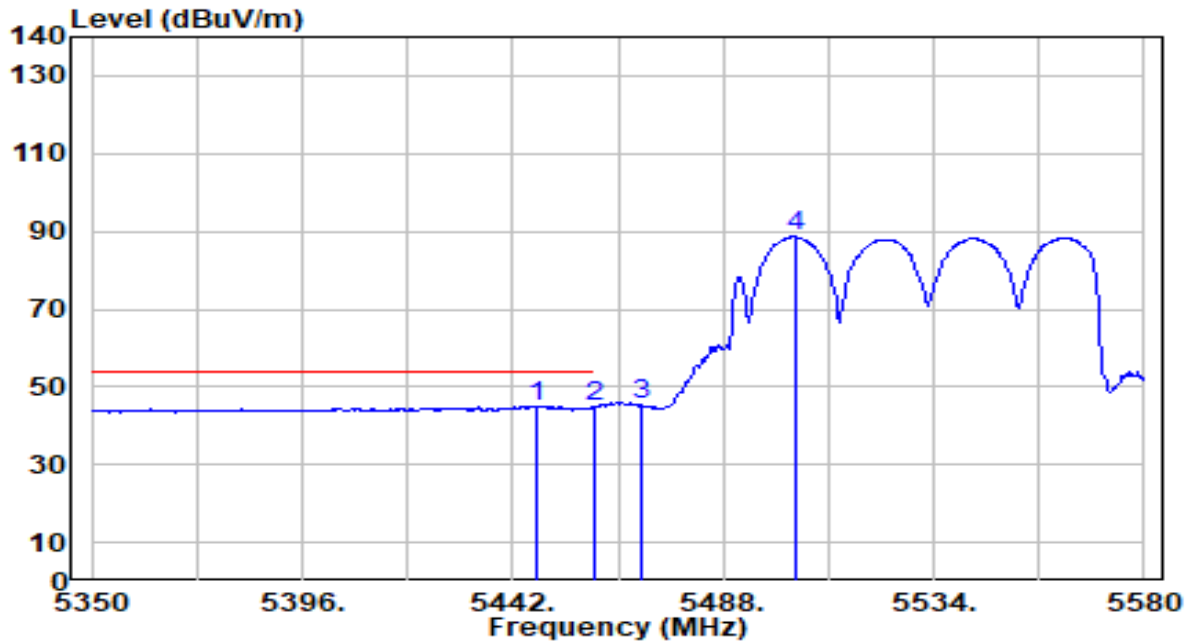


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5447.520	44.45	0.61	45.05	-8.95	54.00	232	152	Average
2		5460.000	44.02	0.66	44.68	-9.32	54.00	232	152	Average
3		5470.000	44.48	0.71	45.18	N/A	N/A	232	152	Average
4		5503.870	87.84	0.86	88.70	N/A	N/A	232	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band 3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

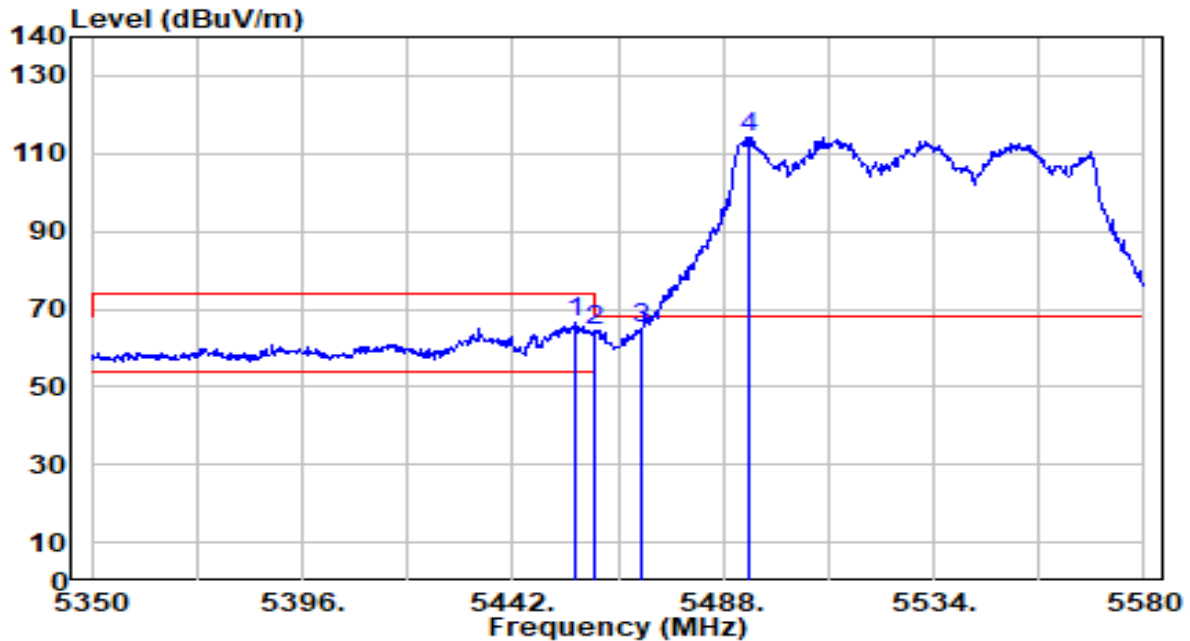


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.800	66.01	0.64	66.65	-7.35	74.00	150	172	Peak
2	5460.000	63.61	0.66	64.27	-9.73	74.00	150	172	Peak
3	* 5470.000	64.21	0.71	64.92	-3.28	68.20	150	172	Peak
4	5493.750	113.21	0.81	114.03	N/A	N/A	150	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band 3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

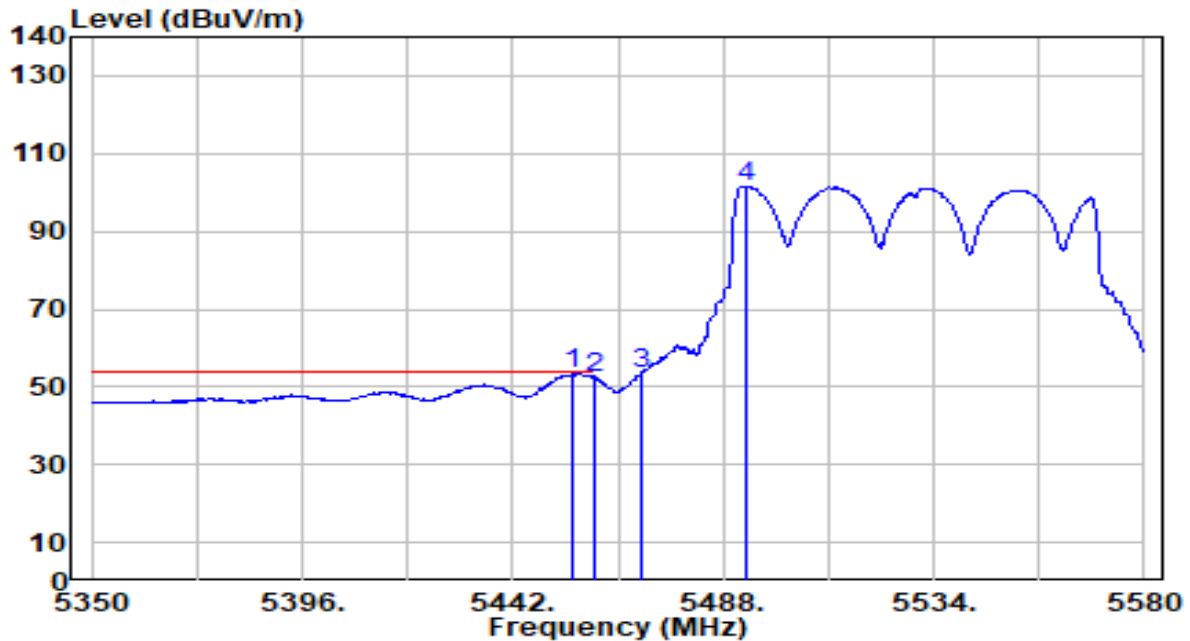


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.110	52.69	0.64	53.33	-0.67	54.00	150	172	Average
2		5460.000	51.59	0.66	52.26	-1.74	54.00	150	172	Average
3		5470.000	52.78	0.71	53.49	N/A	N/A	150	172	Average
4		5493.060	100.70	0.81	101.51	N/A	N/A	150	172	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

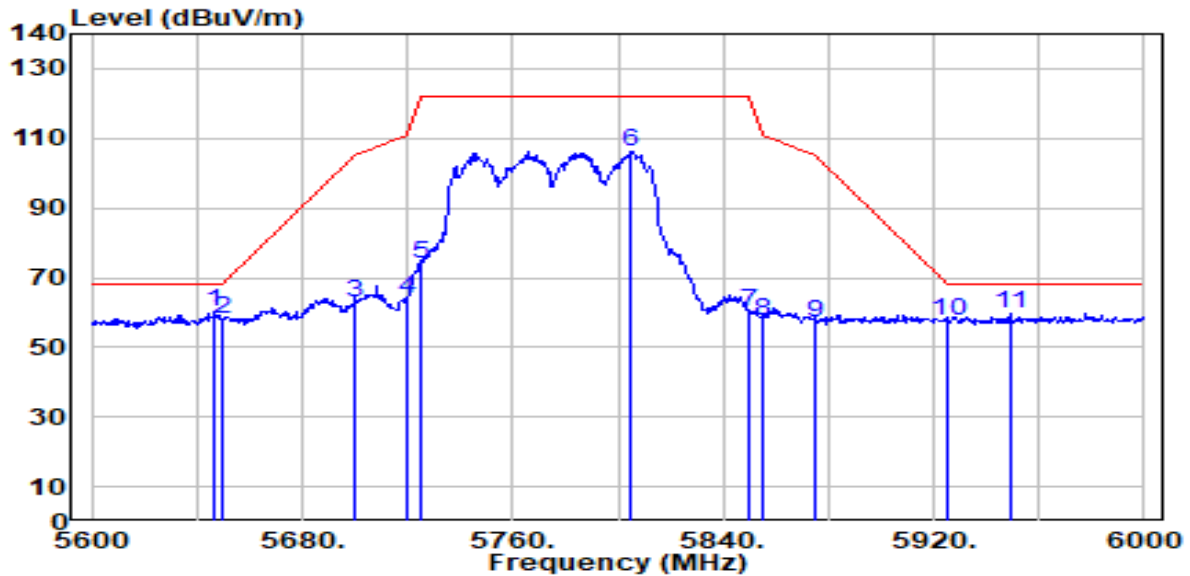


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	58.88	1.53	60.41	-7.79	68.20	100	174	Peak
2		5650.000	56.66	1.54	58.21	-9.99	68.20	100	174	Peak
3		5700.000	61.27	1.78	63.05	-42.15	105.20	100	174	Peak
4		5720.000	62.21	1.87	64.08	-46.72	110.80	100	174	Peak
5		5725.000	71.89	1.89	73.79	-48.41	122.20	100	174	Peak
6		5805.200	103.97	2.24	106.21	N/A	N/A	100	174	Peak
7		5850.000	57.96	2.25	60.22	-61.98	122.20	100	174	Peak
8		5855.000	55.59	2.25	57.84	-52.96	110.80	100	174	Peak
9		5875.000	55.04	2.26	57.30	-47.90	105.20	100	174	Peak
10		5925.000	55.37	2.27	57.64	-10.56	68.20	100	174	Peak
11		5949.200	57.39	2.27	59.67	-8.53	68.20	100	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

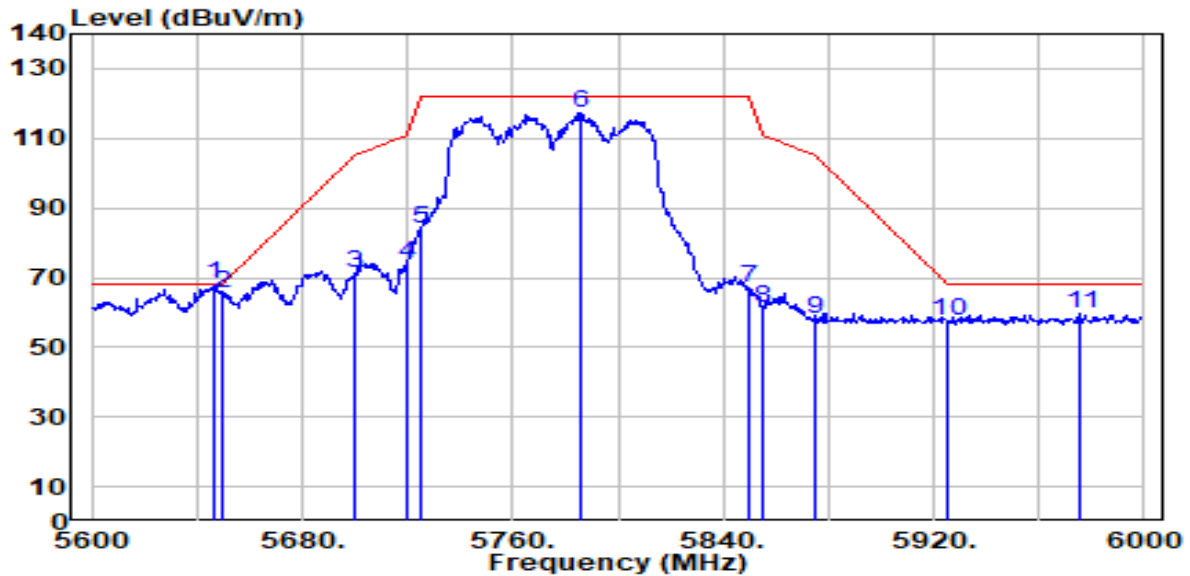


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	66.54	1.53	68.07	-0.13	68.20	100	351	Peak
2		5650.000	63.82	1.54	65.36	-2.84	68.20	100	351	Peak
3		5700.000	69.70	1.78	71.48	-33.72	105.20	100	351	Peak
4		5720.000	71.90	1.87	73.77	-37.03	110.80	100	351	Peak
5		5725.000	82.26	1.89	84.15	-38.05	122.20	100	351	Peak
6		5785.600	114.90	2.18	117.08	N/A	N/A	100	351	Peak
7		5850.000	65.01	2.25	67.27	-54.93	122.20	100	351	Peak
8		5855.000	59.04	2.25	61.29	-49.51	110.80	100	351	Peak
9		5875.000	56.06	2.26	58.31	-46.89	105.20	100	351	Peak
10		5925.000	55.41	2.27	57.68	-10.52	68.20	100	351	Peak
11		5976.000	57.43	2.28	59.70	-8.50	68.20	100	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band 1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

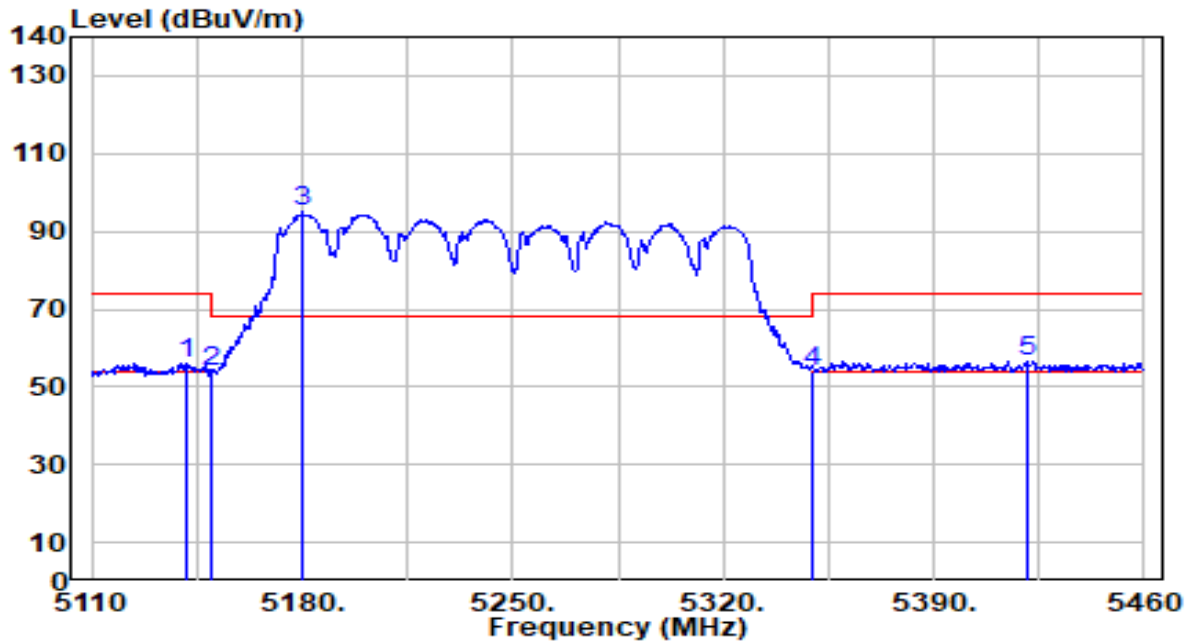


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5141.500	55.43	0.65	56.08	-17.92	74.00	175	0	Peak
2	5150.000	53.03	0.65	53.69	-20.31	74.00	175	0	Peak
3	5180.350	94.38	0.68	95.06	N/A	N/A	175	0	Peak
4	5350.000	53.49	0.47	53.96	-20.04	74.00	175	0	Peak
5	* 5421.150	56.28	0.49	56.77	-17.23	74.00	175	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band 1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

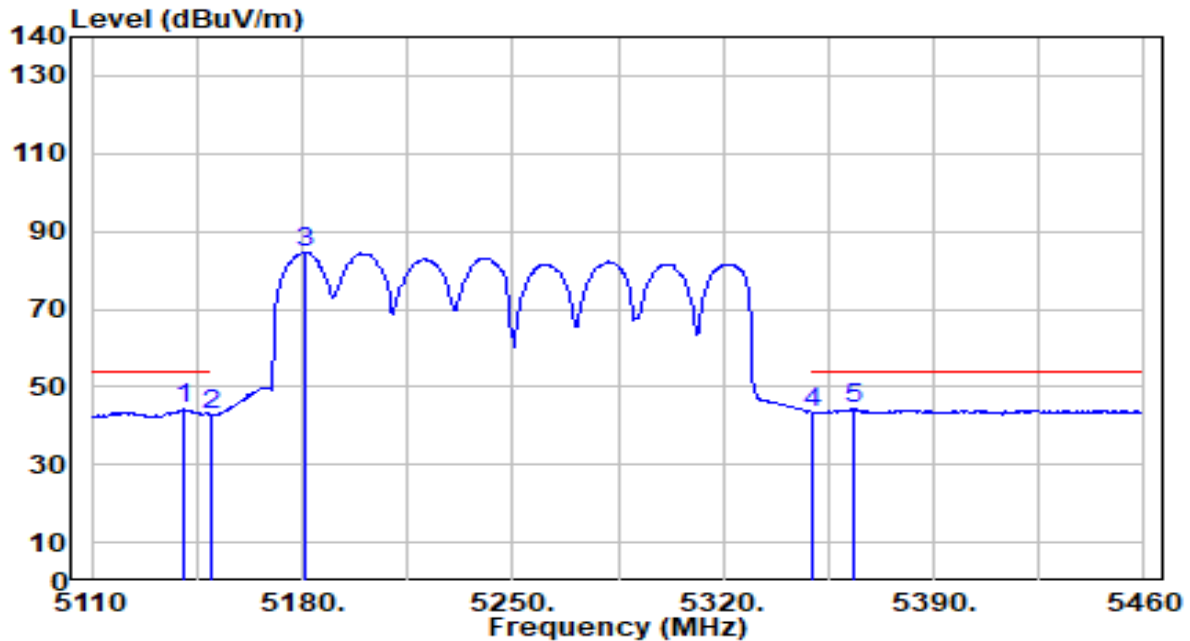


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.800	43.63	0.65	44.27	-9.73	54.00	175	0	Average
2		5150.000	41.99	0.65	42.65	-11.35	54.00	175	0	Average
3		5180.700	83.87	0.68	84.55	N/A	N/A	175	0	Average
4		5350.000	42.96	0.47	43.44	-10.56	54.00	175	0	Average
5		5363.050	43.76	0.45	44.21	-9.79	54.00	175	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band 1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

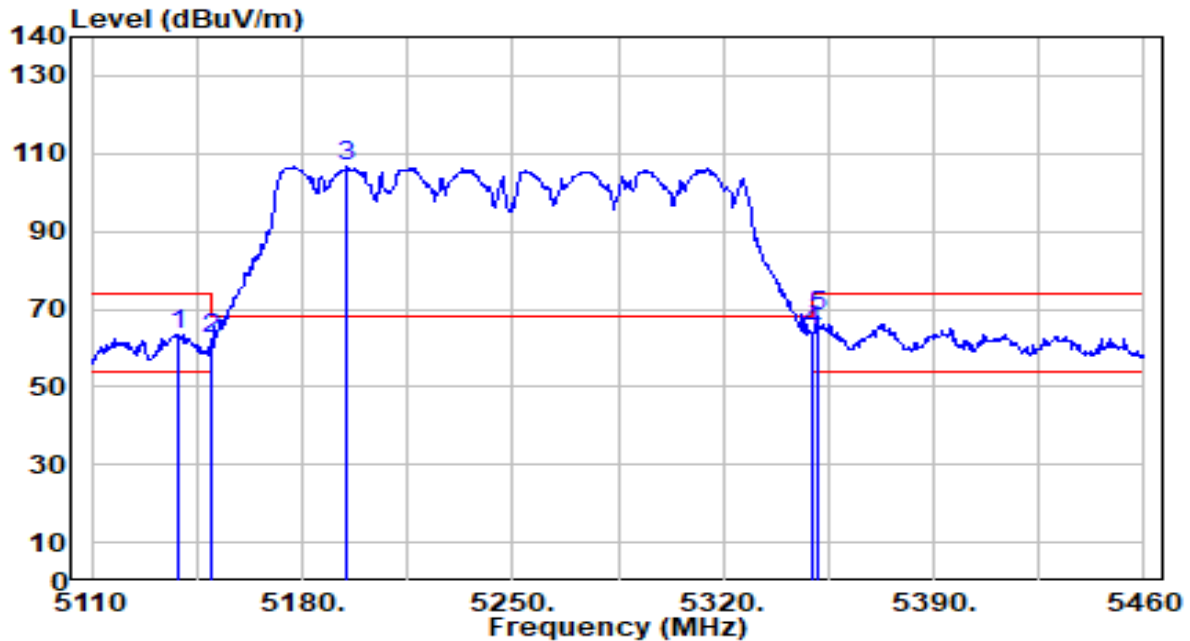


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5138.350	62.94	0.64	63.58	-10.42	74.00	160	169	Peak
2	5150.000	61.68	0.65	62.34	-11.66	74.00	160	169	Peak
3	5195.050	106.15	0.70	106.85	N/A	N/A	160	169	Peak
4	5350.000	64.11	0.47	64.58	-9.42	74.00	160	169	Peak
5	* 5351.150	67.90	0.47	68.37	-5.63	74.00	160	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band 1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

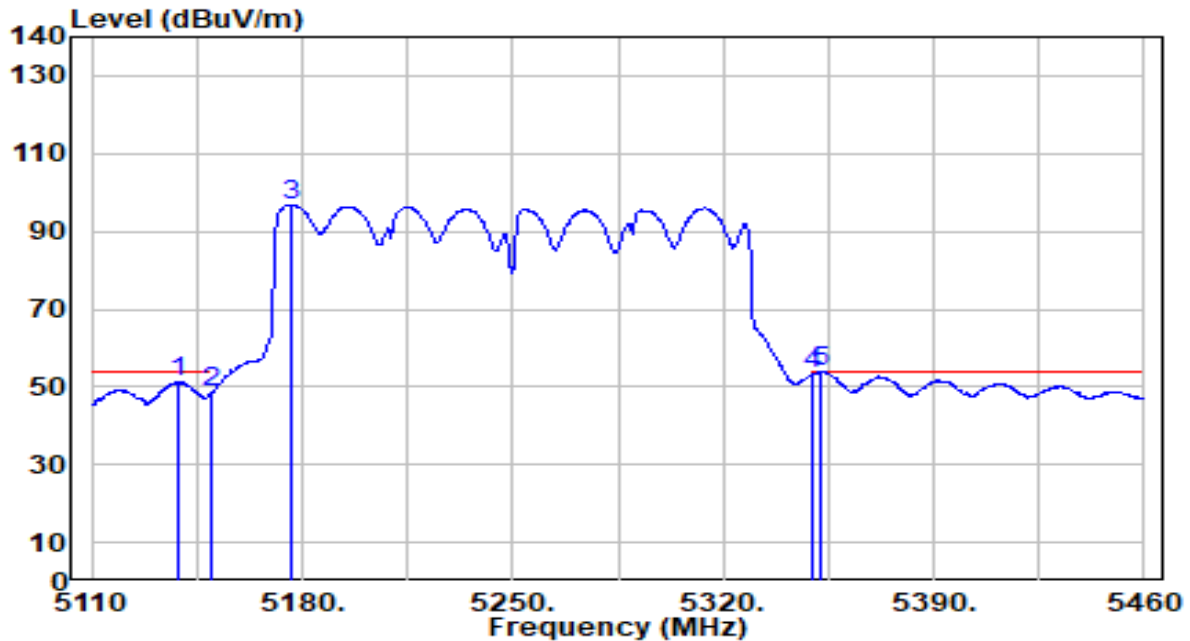


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5138.350	50.52	0.64	51.17	-2.83	54.00	160	169	Average
2	5150.000	47.84	0.65	48.50	-5.50	54.00	160	169	Average
3	5176.150	96.20	0.68	96.88	N/A	N/A	160	169	Average
4	5350.000	52.95	0.47	53.42	-0.58	54.00	160	169	Average
5	* 5352.550	53.40	0.47	53.87	-0.13	54.00	160	169	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

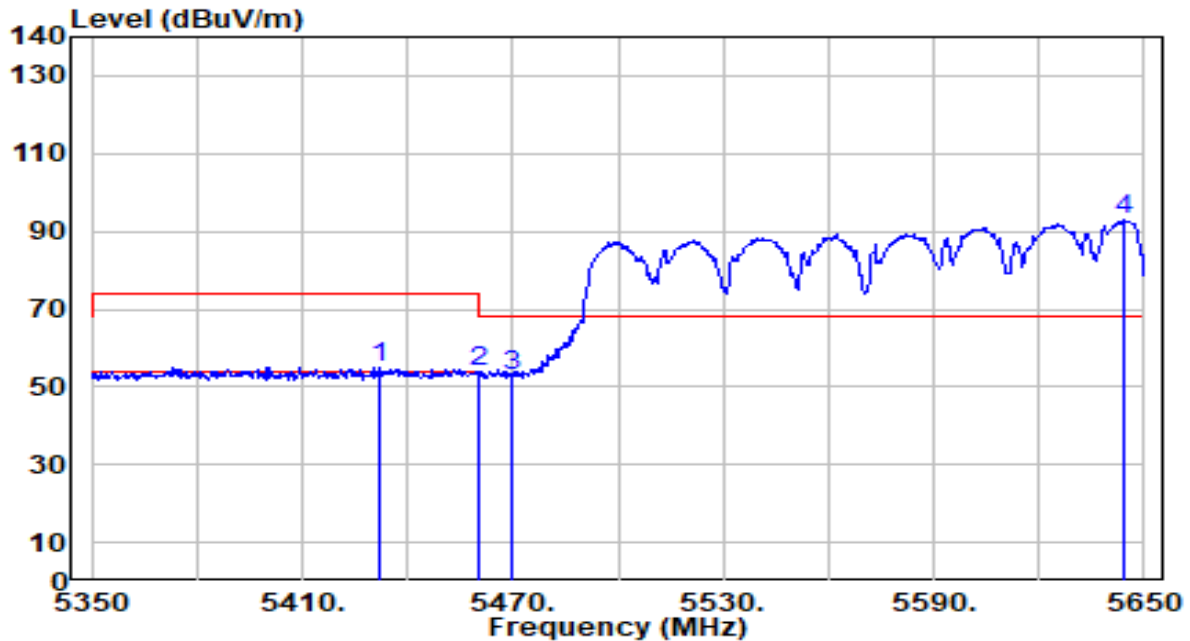


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5432.200	54.33	0.54	54.87	-19.13	74.00	200	39	Peak
2	5460.000	53.07	0.66	53.73	-20.27	74.00	200	39	Peak
3	* 5470.000	51.92	0.71	52.63	-15.57	68.20	200	39	Peak
4	5644.300	91.31	1.52	92.83	N/A	N/A	200	39	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

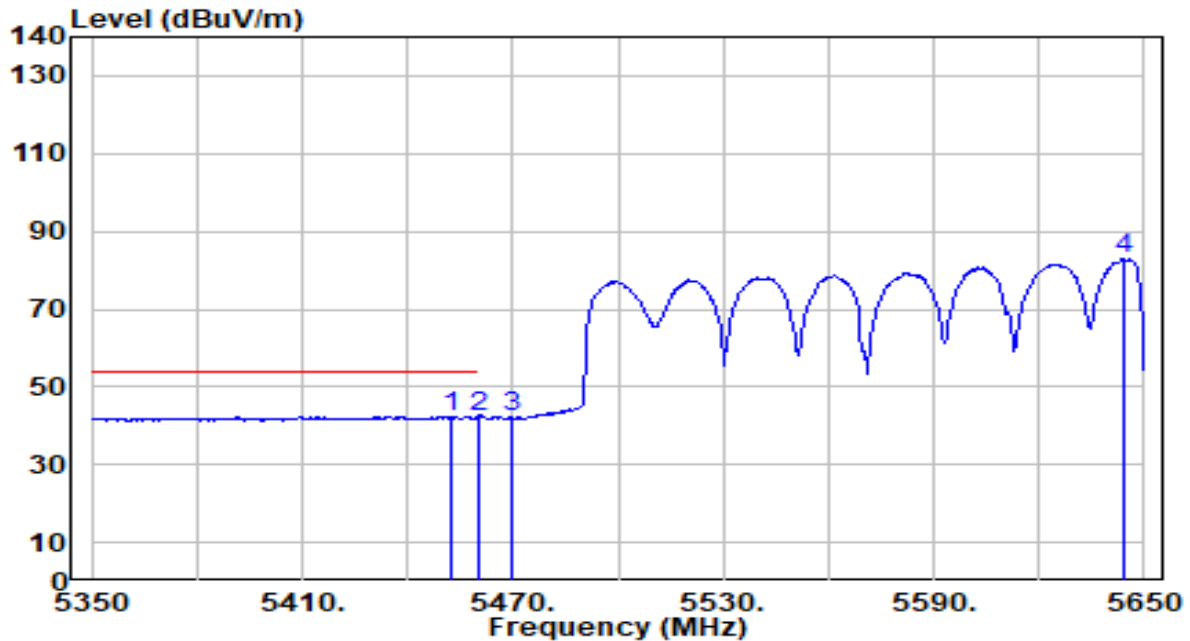


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.600	41.88	0.63	42.50	-11.50	54.00	200	39	Average
2		5460.000	41.45	0.66	42.12	-11.88	54.00	200	39	Average
3		5470.000	41.39	0.71	42.10	N/A	N/A	200	39	Average
4		5644.300	81.45	1.52	82.97	N/A	N/A	200	39	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

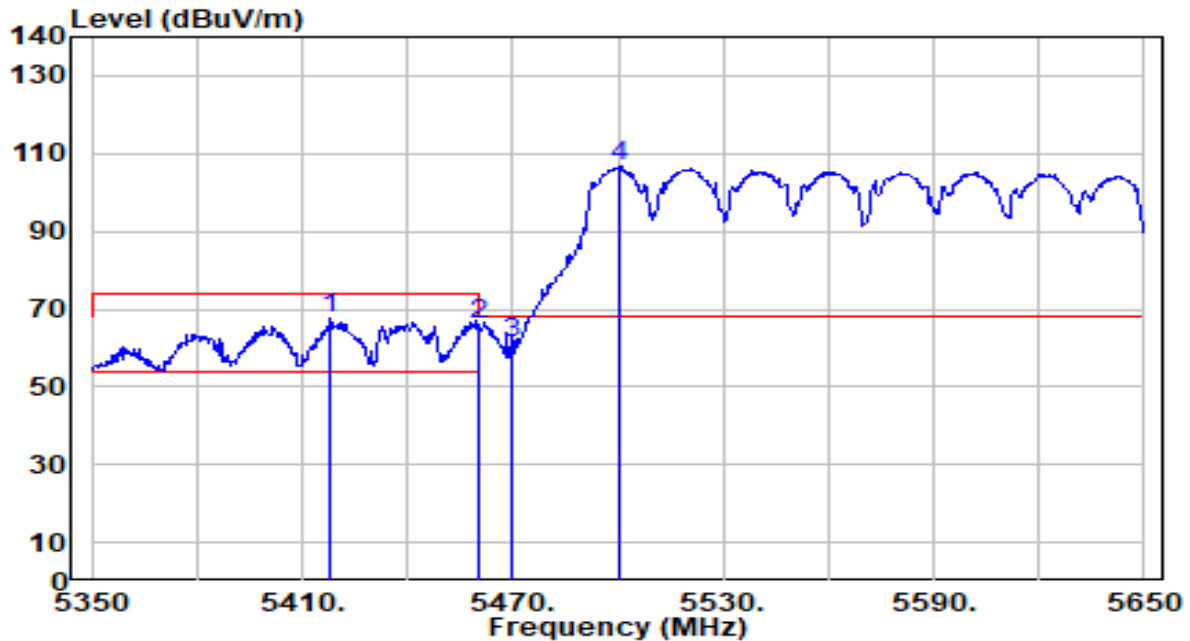


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5418.100	67.17	0.47	67.64	-6.36	74.00	171	351	Peak
2		5460.000	65.31	0.66	65.97	-8.03	74.00	171	351	Peak
3		5470.000	60.48	0.71	61.19	-7.01	68.20	171	351	Peak
4		5500.300	105.88	0.84	106.72	N/A	N/A	171	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

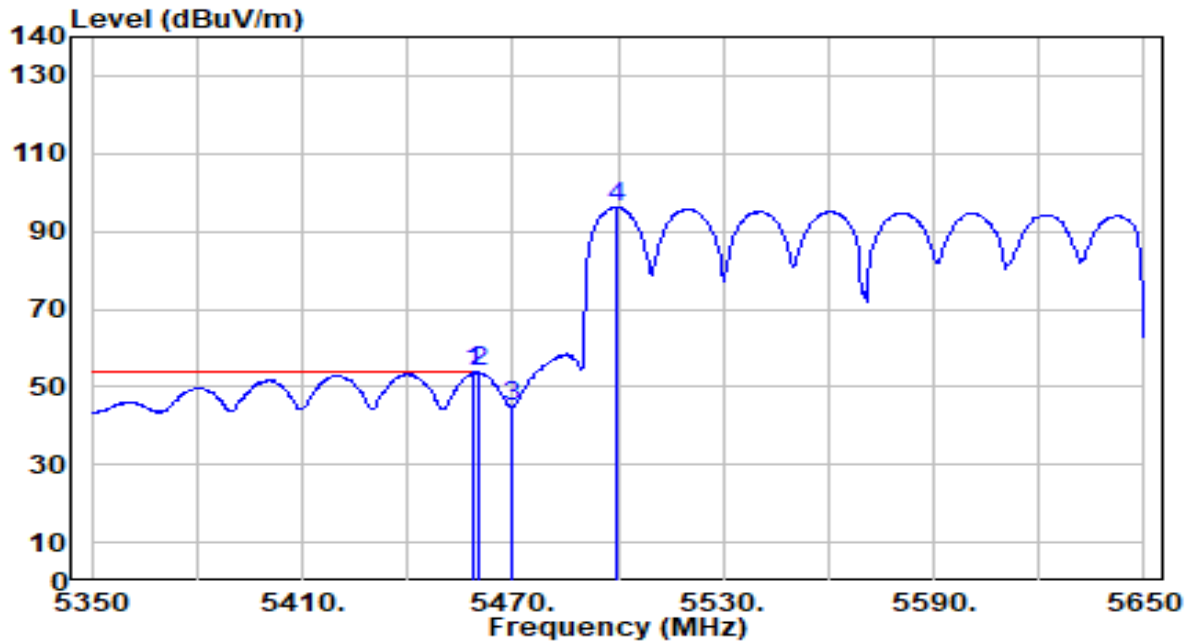


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.900	53.07	0.66	53.72	-0.28	54.00	171	351	Average
2	*	5460.000	53.14	0.66	53.80	-0.20	54.00	171	351	Average
3		5470.000	44.16	0.71	44.87	N/A	N/A	171	351	Average
4		5499.700	95.44	0.84	96.28	N/A	N/A	171	351	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

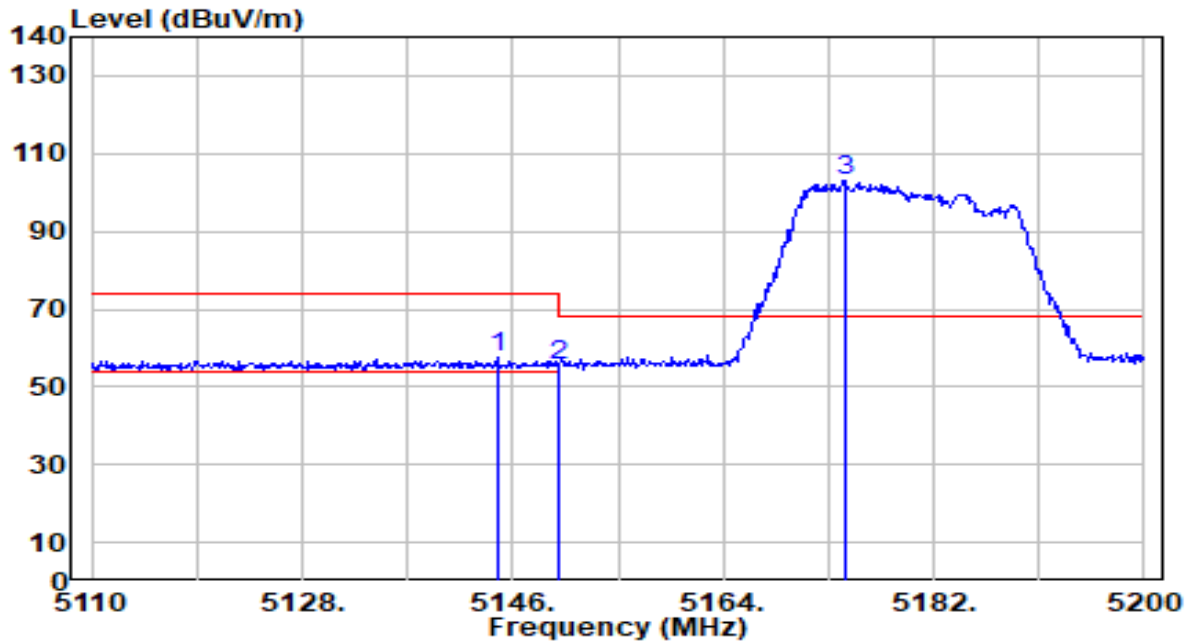


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.740	56.74	0.65	57.39	-16.61	74.00	200	16	Peak
2		5150.000	54.66	0.65	55.31	-18.69	74.00	200	16	Peak
3		5174.350	102.53	0.68	103.21	N/A	N/A	200	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

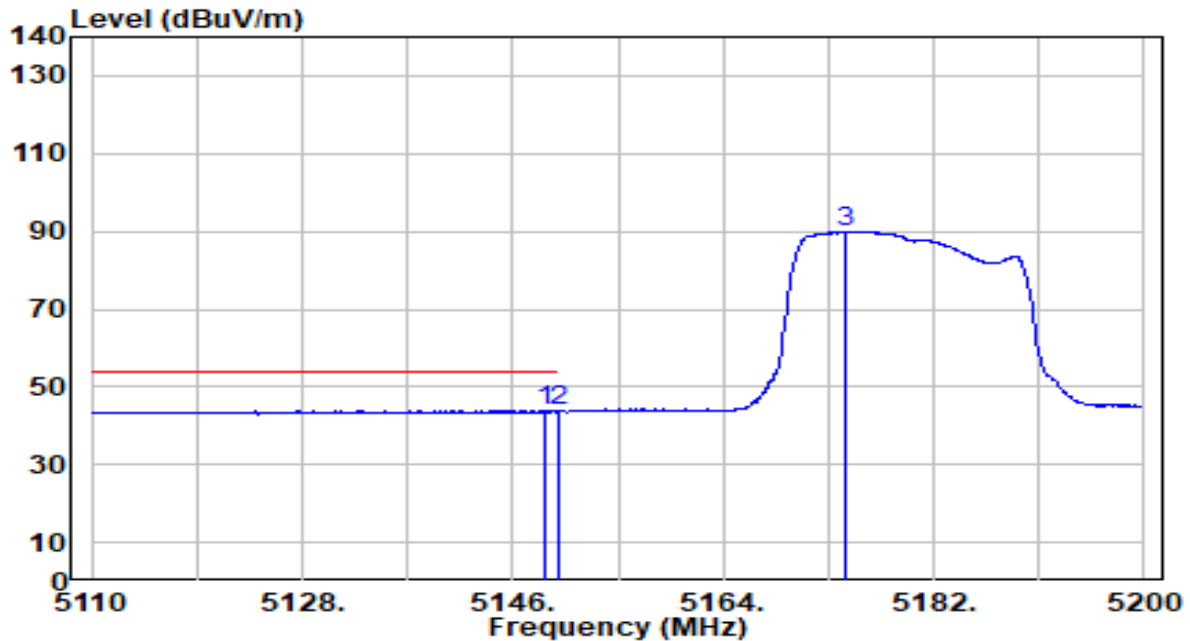


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	43.16	0.65	43.82	-10.18	54.00	200	16	Average
2		5150.000	43.01	0.65	43.66	-10.34	54.00	200	16	Average
3		5174.530	89.19	0.68	89.86	N/A	N/A	200	16	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

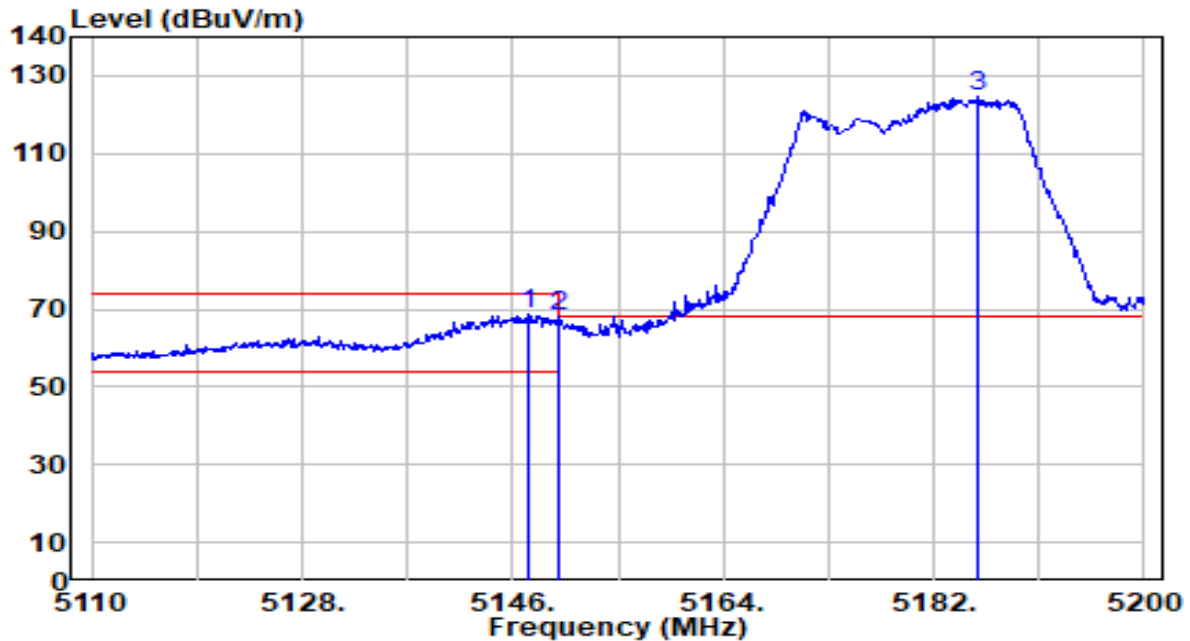


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.350	67.88	0.65	68.53	-5.47	74.00	150	350	Peak
2		5150.000	67.57	0.65	68.22	-5.78	74.00	150	350	Peak
3		5185.870	123.85	0.69	124.54	N/A	N/A	150	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

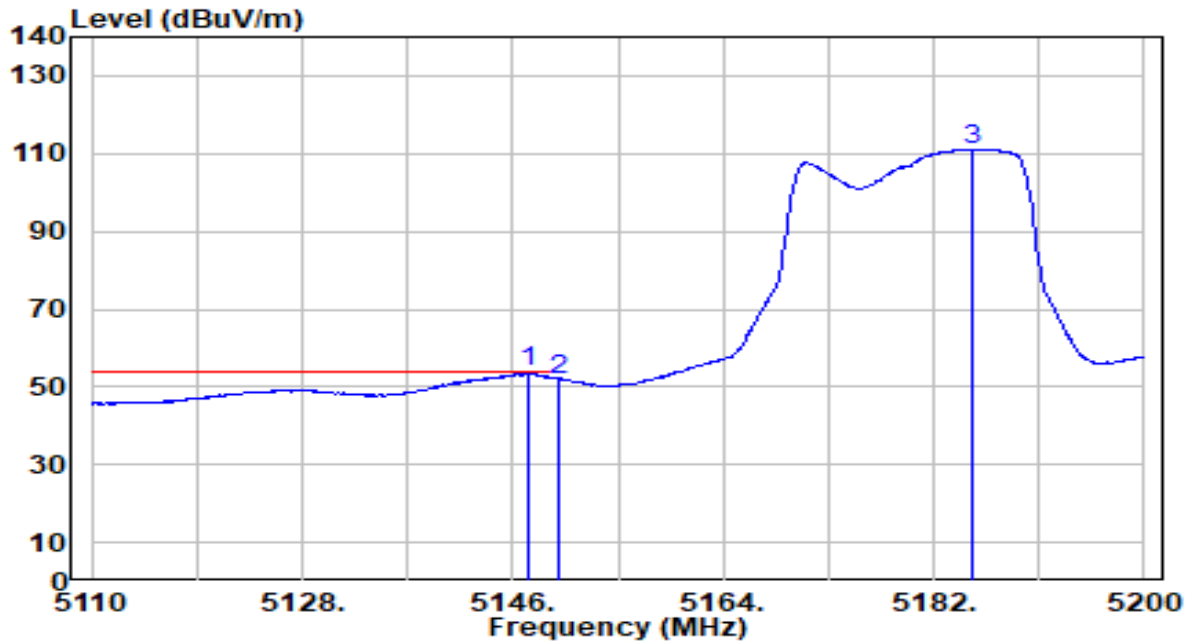


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.440	53.08	0.65	53.73	-0.27	54.00	150	350	Average
2		5150.000	51.29	0.65	51.94	-2.06	54.00	150	350	Average
3		5185.330	110.41	0.69	111.09	N/A	N/A	150	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

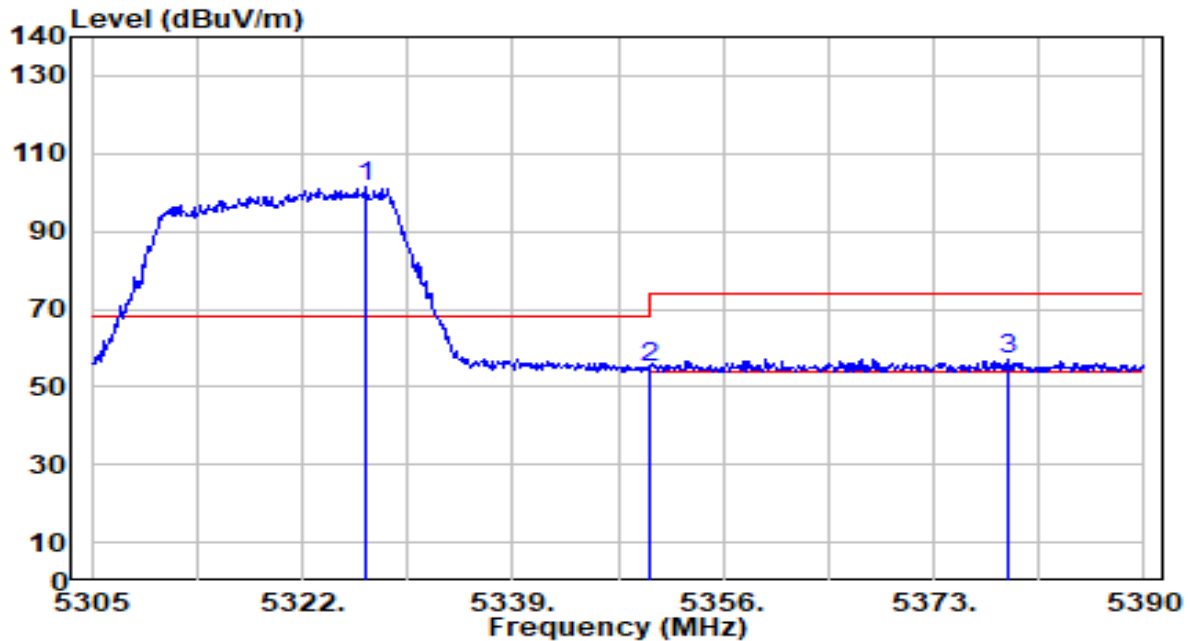


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.185	101.17	0.51	101.68	N/A	N/A	200	16	Peak
2	5350.000	54.39	0.47	54.86	-19.14	74.00	200	16	Peak
3	* 5378.950	56.78	0.43	57.20	-16.80	74.00	200	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

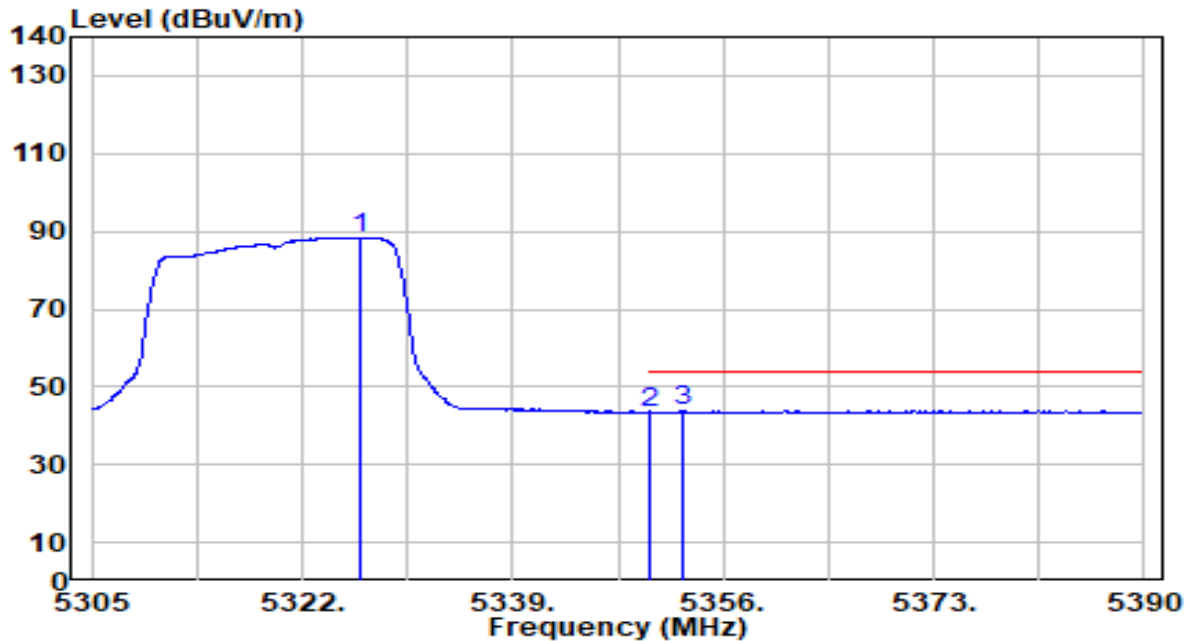


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.675	87.89	0.51	88.39	N/A	N/A	200	16	Average
2	5350.000	43.04	0.47	43.51	-10.49	54.00	200	16	Average
3	* 5352.685	43.33	0.47	43.79	-10.21	54.00	200	16	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

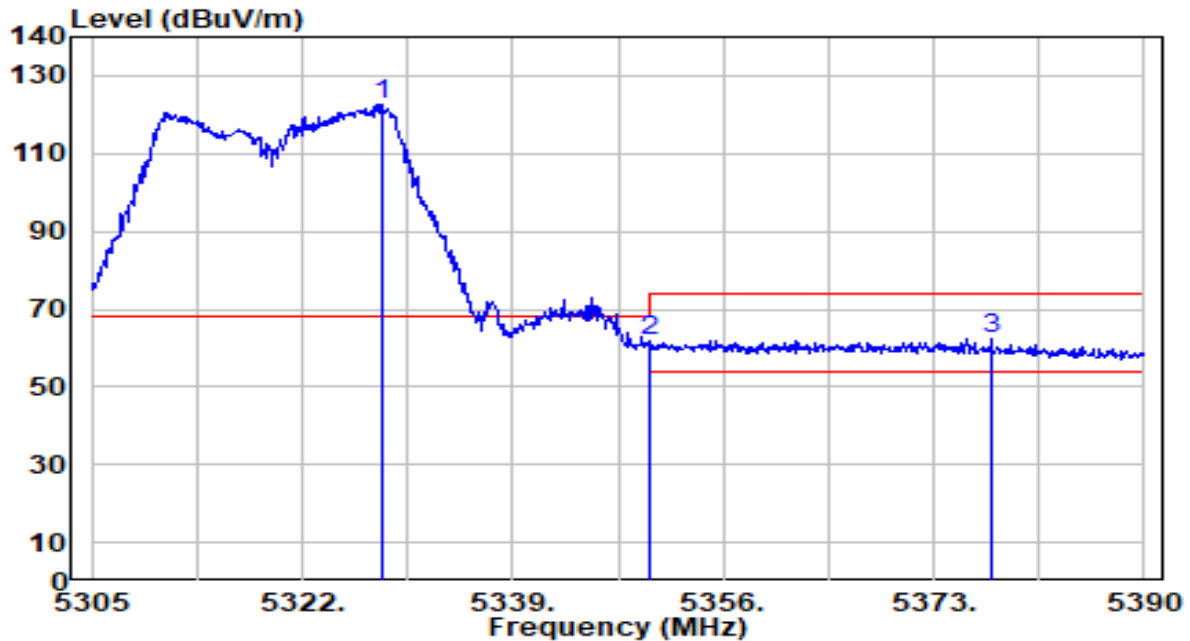


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.375	122.29	0.50	122.80	N/A	N/A	150	346	Peak
2	5350.000	61.11	0.47	61.59	-12.41	74.00	150	346	Peak
3	* 5377.675	61.99	0.43	62.42	-11.58	74.00	150	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

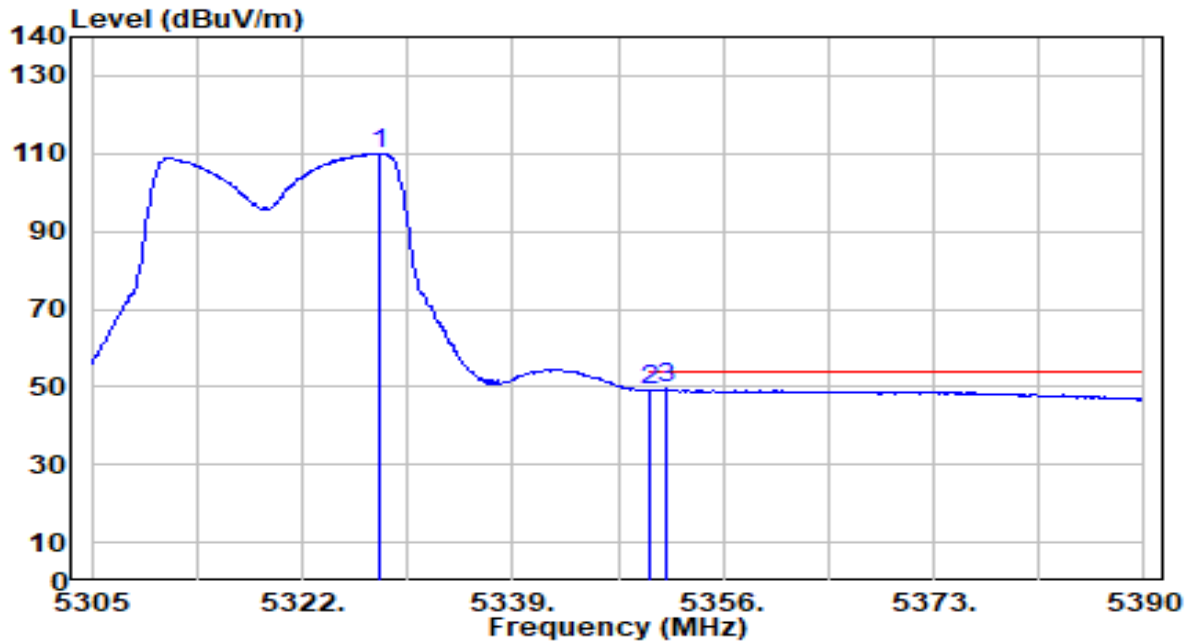


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.205	109.44	0.50	109.95	N/A	N/A	150	346	Average
2	5350.000	48.77	0.47	49.24	-4.76	54.00	150	346	Average
3	* 5351.325	49.04	0.47	49.50	-4.50	54.00	150	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

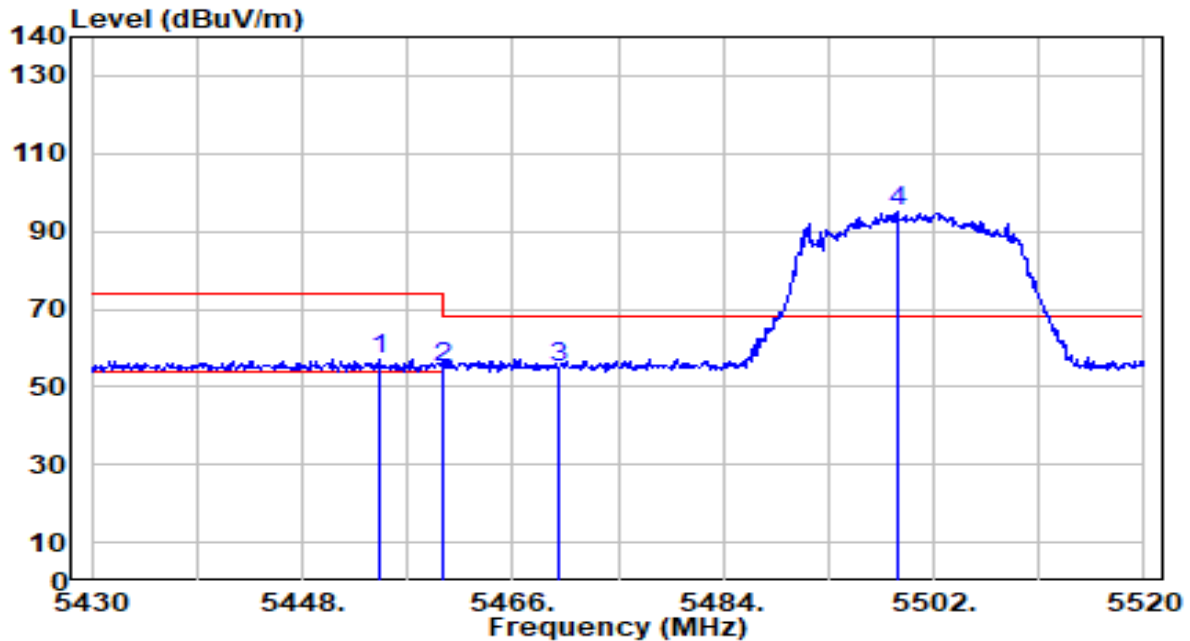


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.570	56.57	0.64	57.21	-16.79	74.00	200	316	Peak
2	5460.000	54.08	0.66	54.74	-19.26	74.00	200	316	Peak
3	* 5470.000	54.32	0.71	55.03	-13.17	68.20	200	316	Peak
4	5498.940	94.33	0.84	95.16	N/A	N/A	200	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

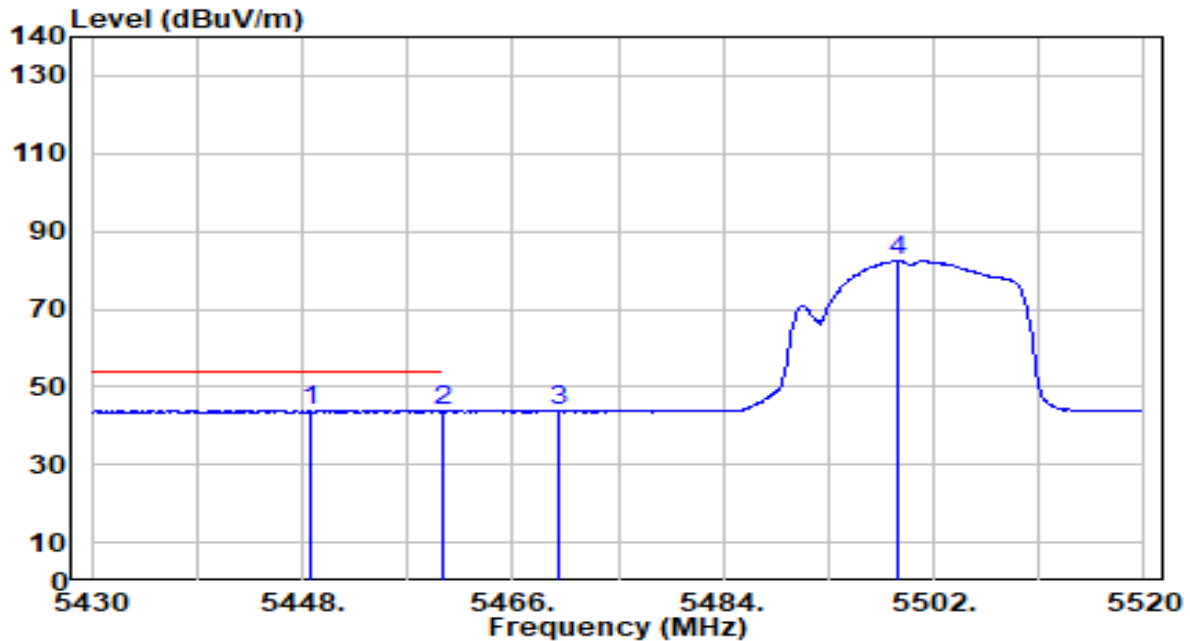


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.810	43.32	0.61	43.93	-10.07	54.00	200	316	Average
2		5460.000	43.04	0.66	43.70	-10.30	54.00	200	316	Average
3		5470.000	43.03	0.71	43.74	N/A	N/A	200	316	Average
4		5498.850	81.60	0.83	82.43	N/A	N/A	200	316	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

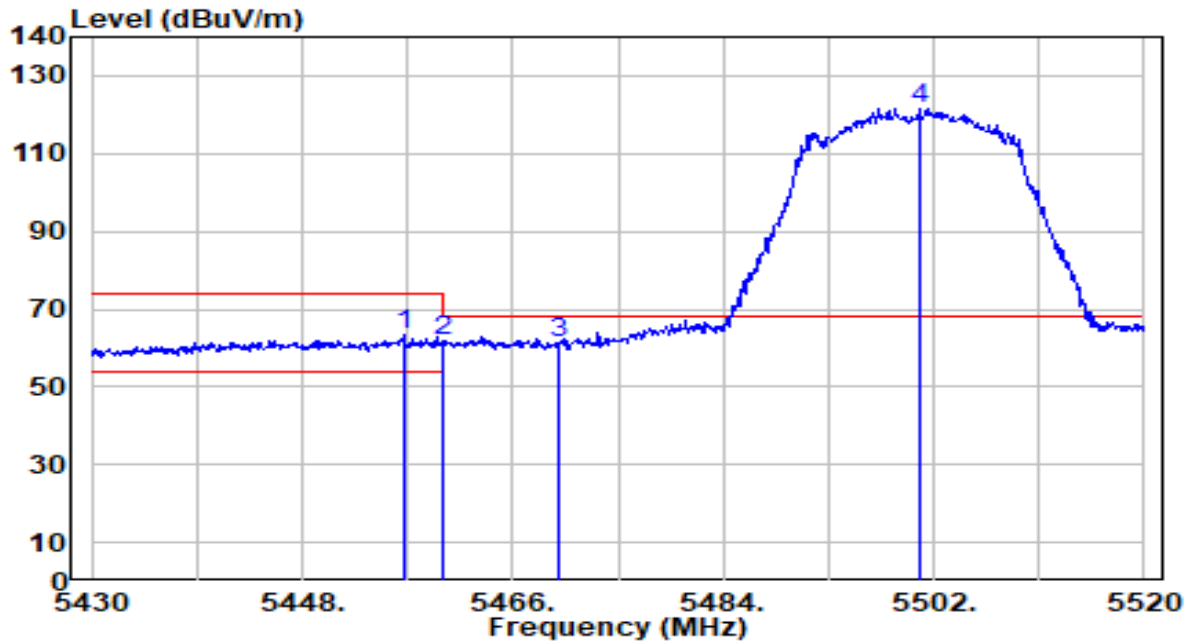


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.640	62.68	0.65	63.33	-10.67	74.00	150	166	Peak
2	5460.000	61.32	0.66	61.98	-12.02	74.00	150	166	Peak
3	* 5470.000	60.54	0.71	61.24	-6.96	68.20	150	166	Peak
4	5500.830	120.89	0.84	121.74	N/A	N/A	150	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

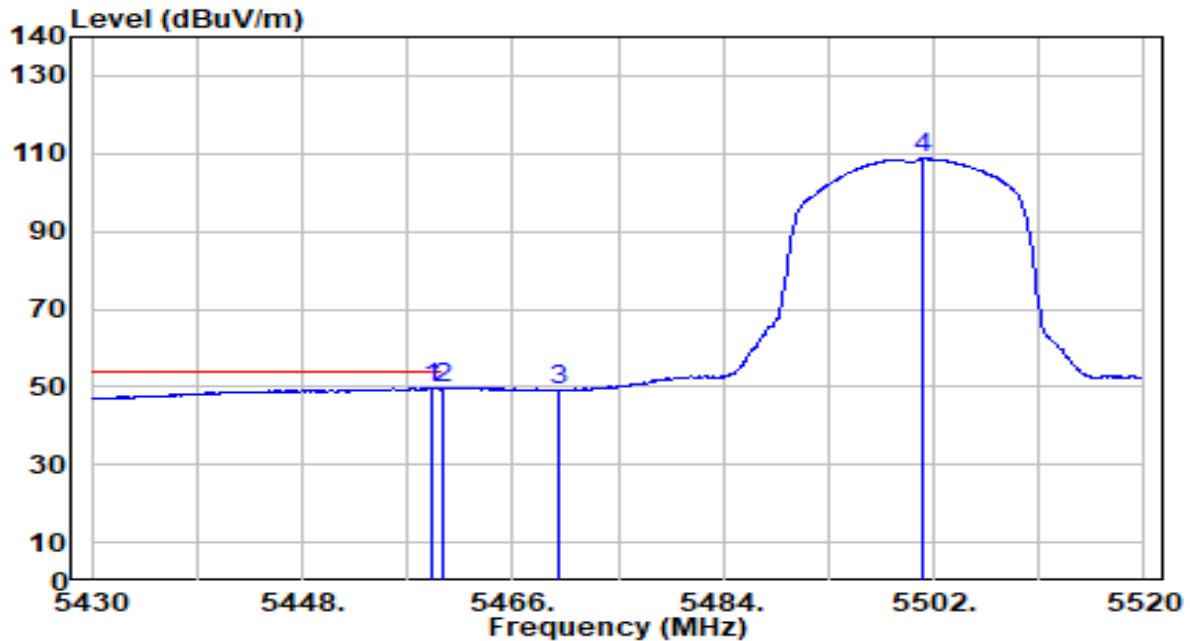


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.980	49.08	0.66	49.73	-4.27	54.00	150	166	Average
2		5460.000	48.88	0.66	49.55	-4.45	54.00	150	166	Average
3		5470.000	48.37	0.71	49.08	N/A	N/A	150	166	Average
4		5501.100	107.79	0.85	108.64	N/A	N/A	150	166	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

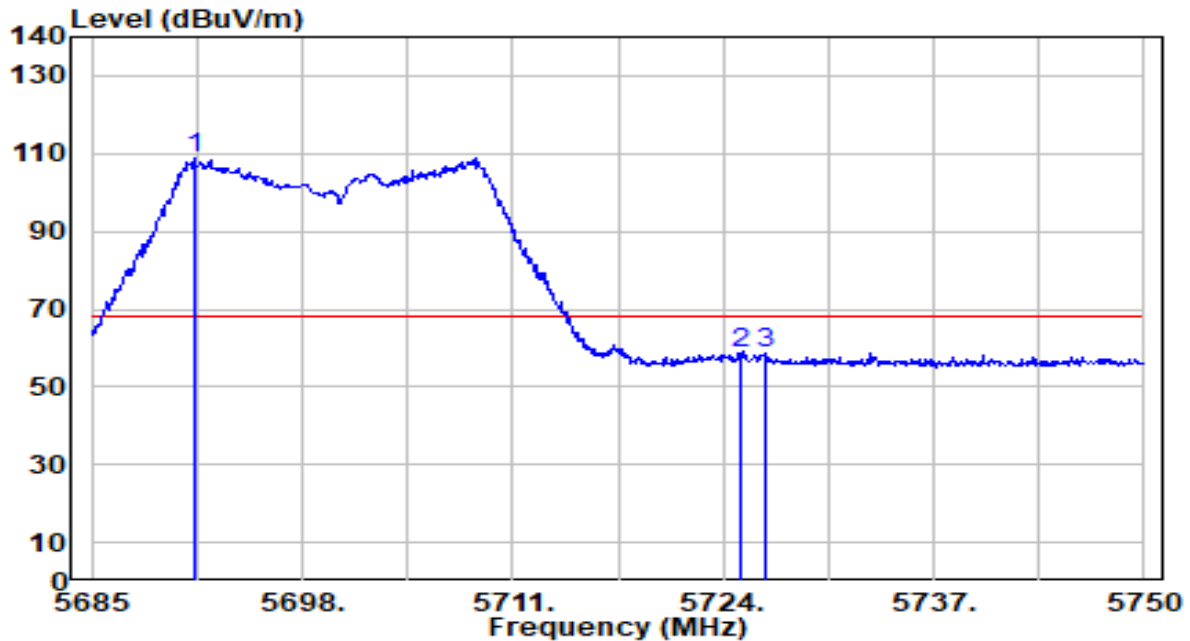


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5691.370	106.97	1.74	108.70	N/A	N/A	200	318	Peak
2	5725.000	56.50	1.89	58.39	-9.81	68.20	200	318	Peak
3	* 5726.665	56.87	1.90	58.77	-9.43	68.20	200	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band 3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

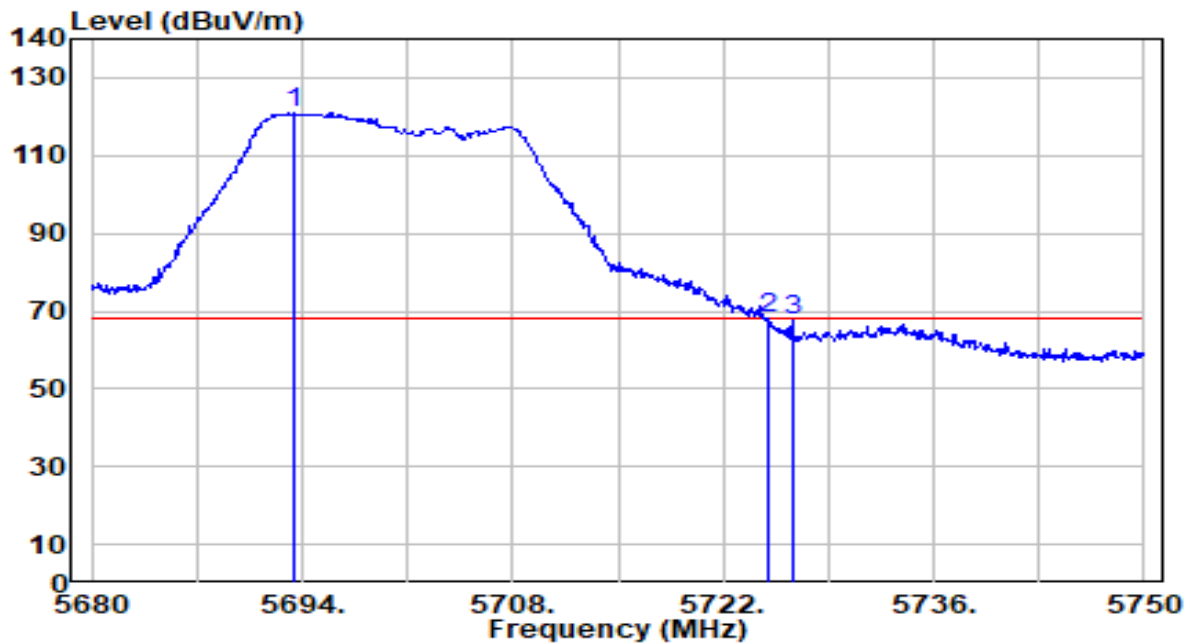


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5693.370	119.02	1.74	120.77	N/A	N/A	150	343	Peak
2	*	5725.000	66.08	1.89	67.97	-0.23	68.20	150	343	Peak
3		5726.620	65.83	1.90	67.73	-0.47	68.20	150	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

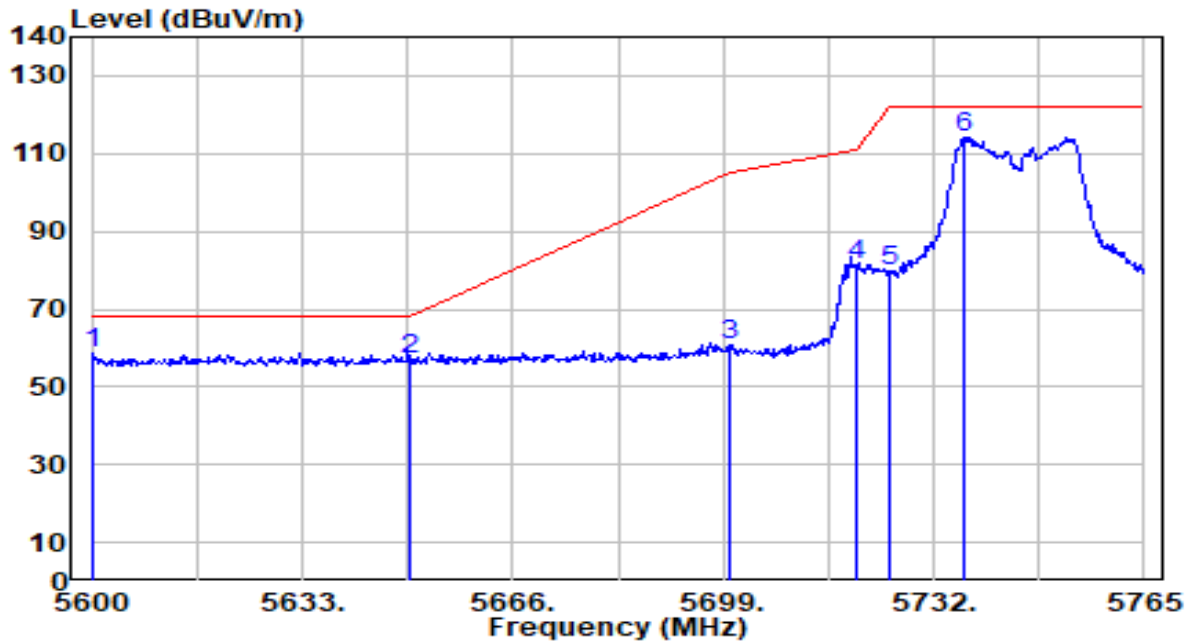


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5600.165	57.32	1.31	58.63	-9.57	68.20	100	174	Peak
2		5650.000	55.40	1.54	56.95	-11.25	68.20	100	174	Peak
3		5700.000	58.76	1.78	60.54	-44.66	105.20	100	174	Peak
4		5720.000	79.34	1.87	81.21	-29.59	110.80	100	174	Peak
5		5725.000	77.90	1.89	79.79	-42.41	122.20	100	174	Peak
6		5736.620	112.22	1.95	114.17	N/A	N/A	100	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

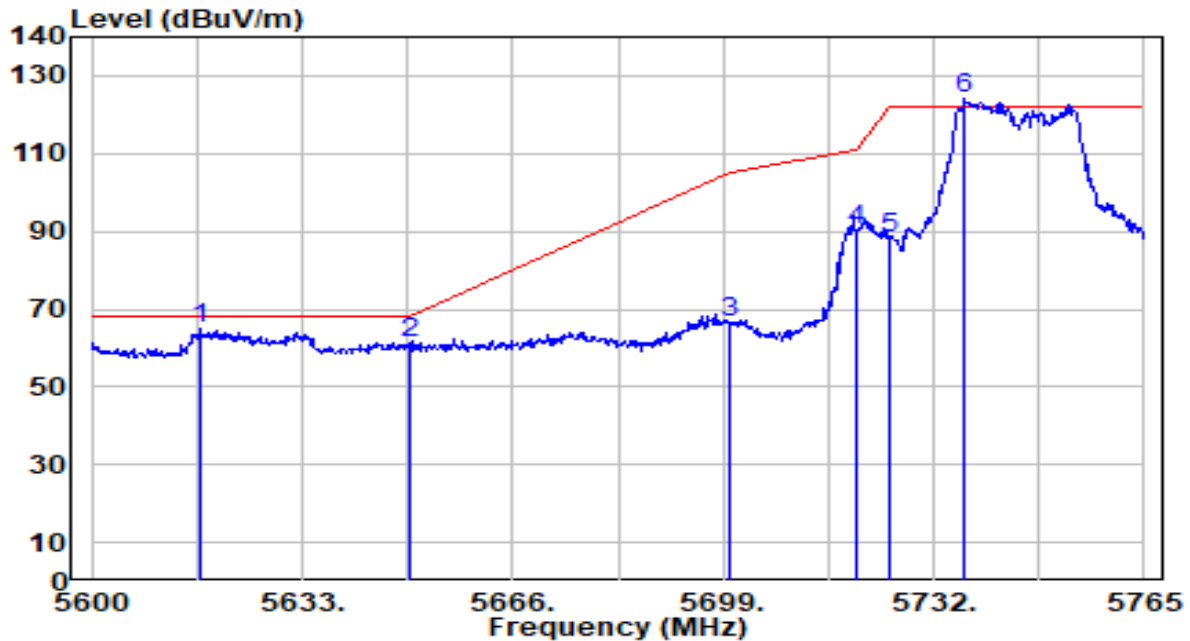


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5616.995	63.33	1.39	64.72	-3.48	68.20	100	351	Peak
2		5650.000	59.50	1.54	61.05	-7.15	68.20	100	351	Peak
3		5700.000	64.59	1.78	66.37	-38.83	105.20	100	351	Peak
4		5720.000	88.59	1.87	90.46	-20.34	110.80	100	351	Peak
5		5725.000	86.32	1.89	88.22	-33.98	122.20	100	351	Peak
6		5736.950	122.13	1.95	124.08	N/A	N/A	100	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

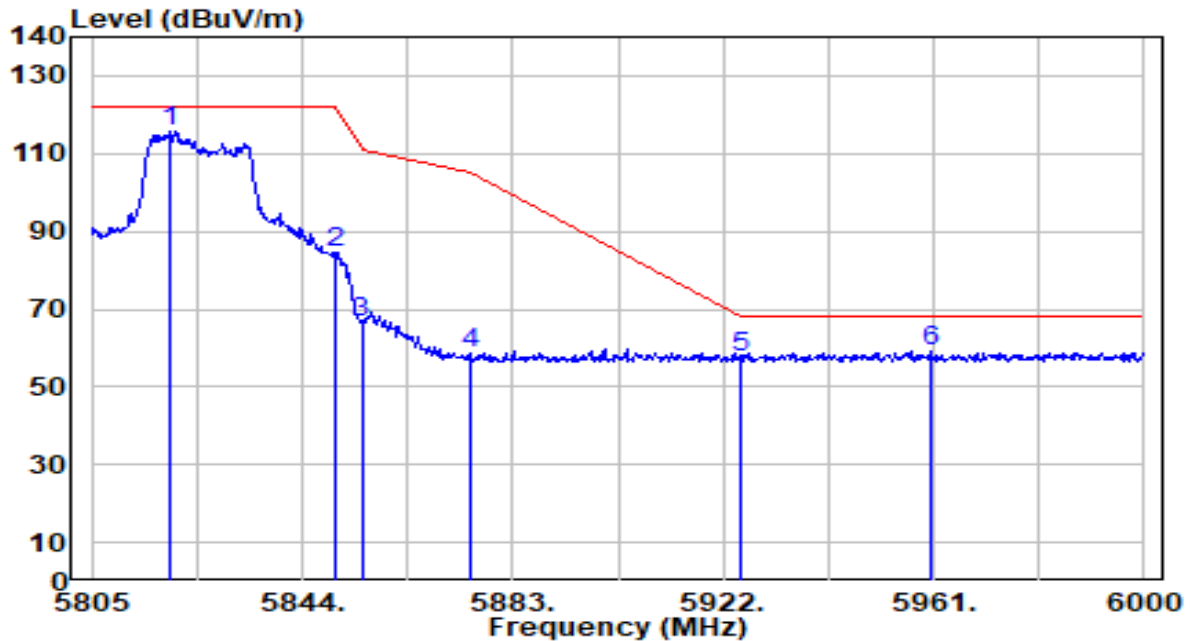


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.430	113.54	2.25	115.78	N/A	N/A	100	219	Peak
2	5850.000	82.27	2.25	84.52	-37.68	122.20	100	219	Peak
3	5855.000	64.27	2.25	66.52	-44.28	110.80	100	219	Peak
4	5875.000	56.43	2.26	58.69	-46.51	105.20	100	219	Peak
5	5925.000	55.38	2.27	57.64	-10.56	68.20	100	219	Peak
6	* 5960.415	56.75	2.27	59.03	-9.17	68.20	100	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

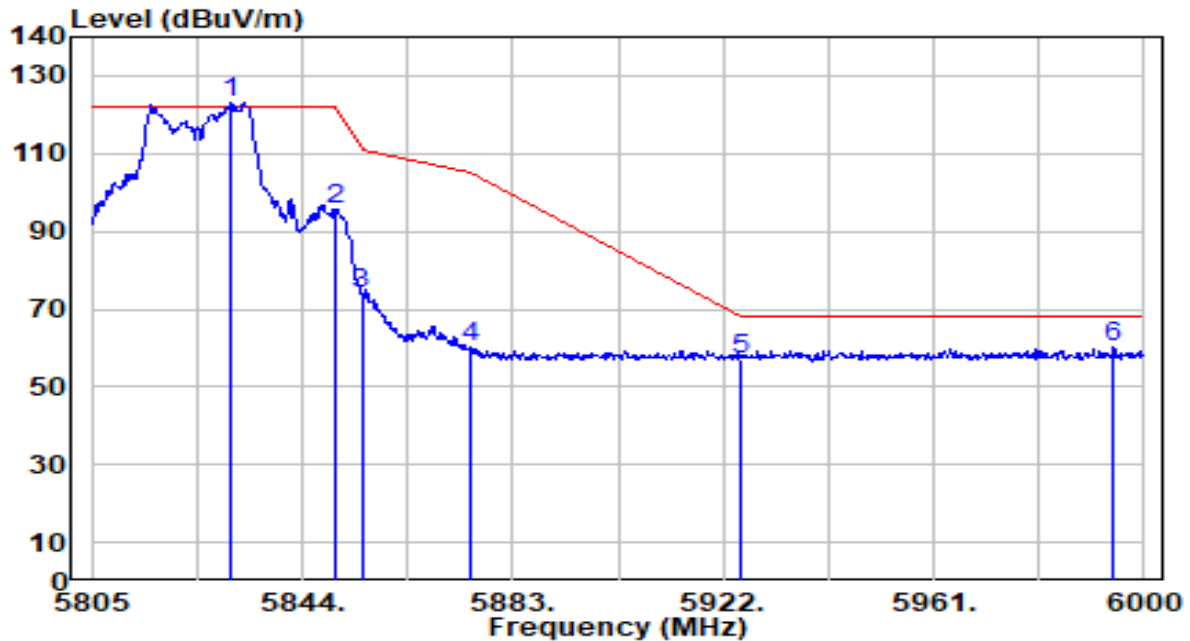


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5830.545	120.99	2.25	123.24	N/A	N/A	200	78	Peak
2	5850.000	93.56	2.25	95.81	-26.39	122.20	200	78	Peak
3	5855.000	71.72	2.25	73.98	-36.82	110.80	200	78	Peak
4	5875.000	57.84	2.26	60.10	-45.10	105.20	200	78	Peak
5	5925.000	54.76	2.27	57.02	-11.18	68.20	200	78	Peak
6	* 5994.345	57.77	2.28	60.05	-8.15	68.20	200	78	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

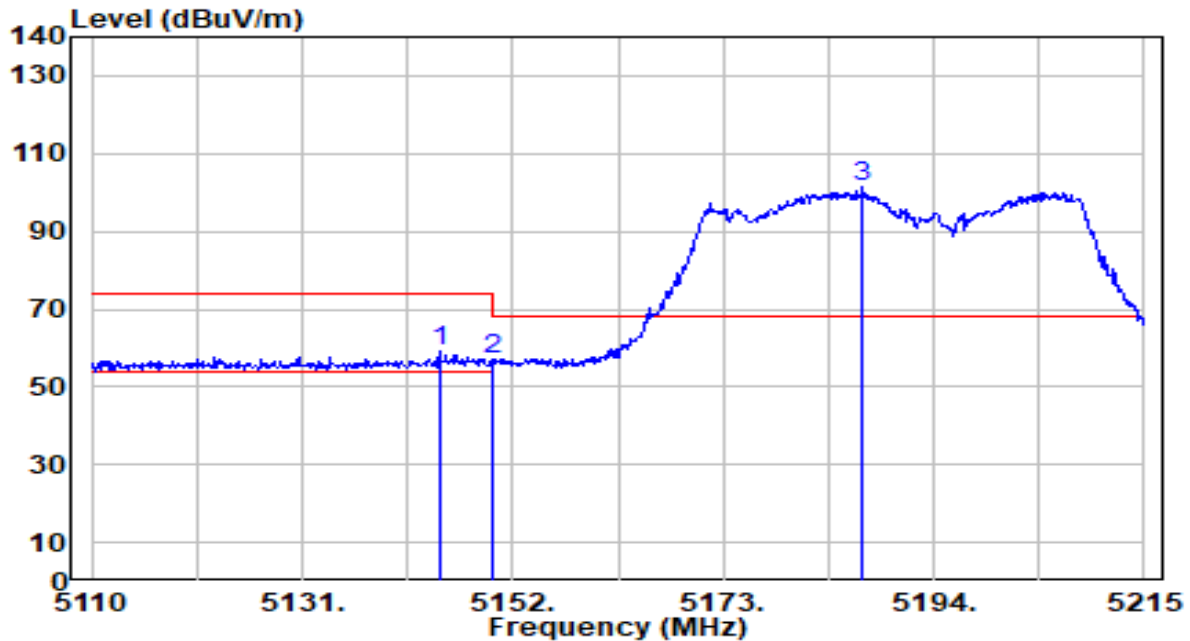


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.650	58.77	0.65	59.42	-14.58	74.00	200	16	Peak
2		5150.000	56.26	0.65	56.92	-17.08	74.00	200	16	Peak
3		5186.860	100.87	0.69	101.55	N/A	N/A	200	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

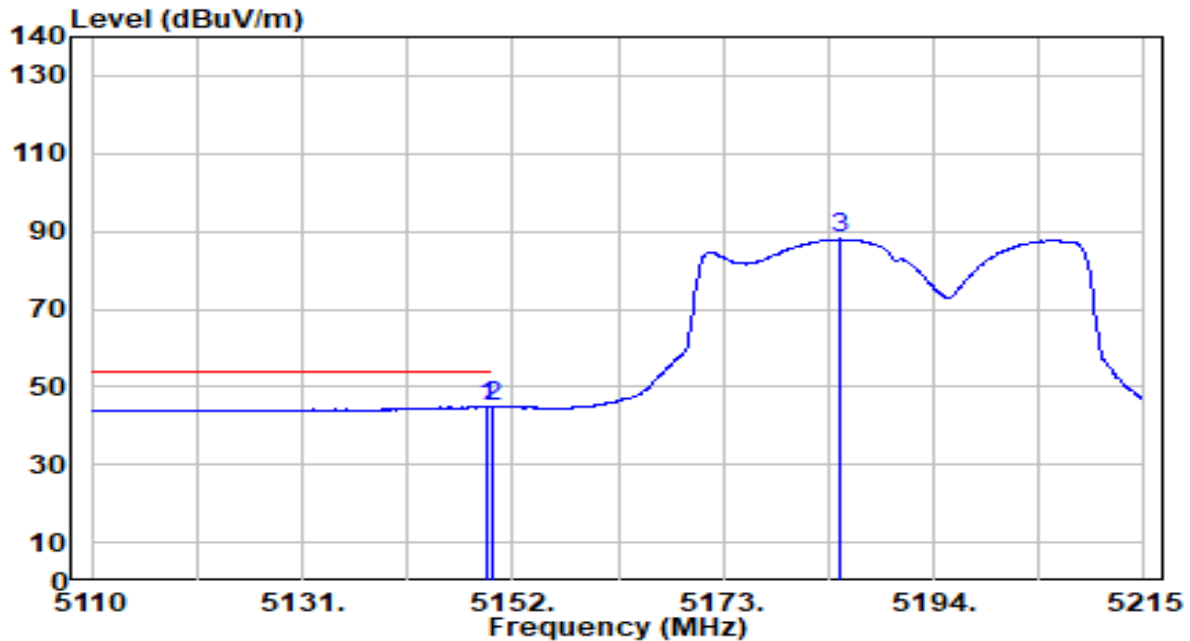


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	44.25	0.65	44.90	-9.10	54.00	200	16	Average
2		5150.000	44.10	0.65	44.75	-9.25	54.00	200	16	Average
3		5184.655	87.29	0.69	87.98	N/A	N/A	200	16	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

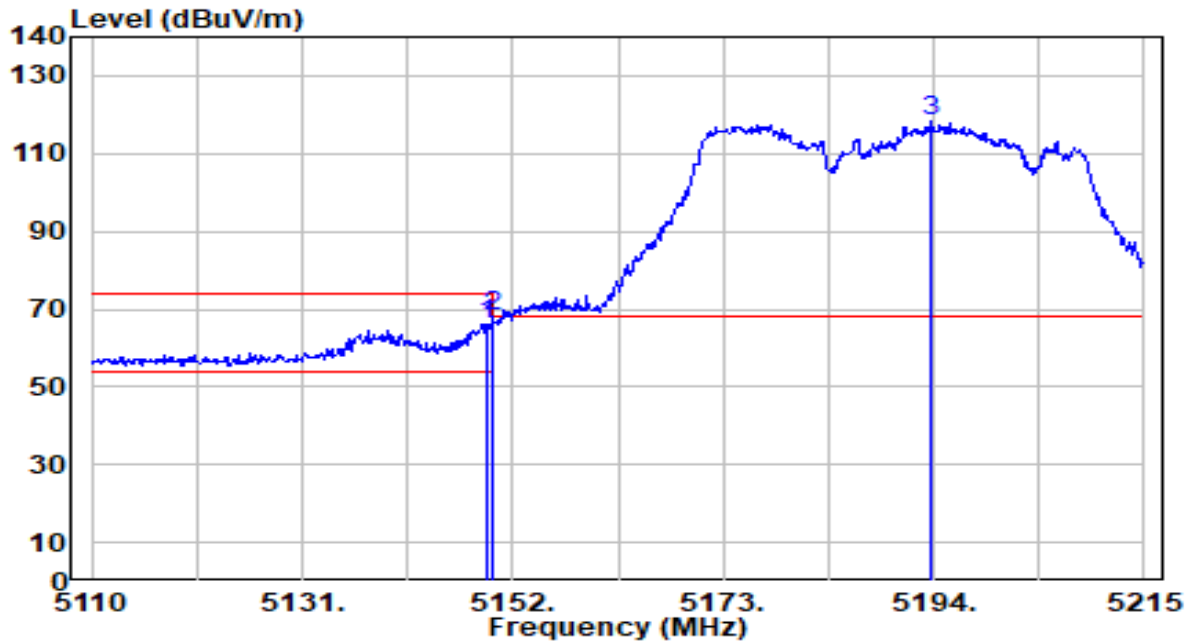


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.480	65.28	0.65	65.93	-8.07	74.00	150	350	Peak
2	* 5150.000	67.68	0.65	68.33	-5.67	74.00	150	350	Peak
3	5193.790	117.43	0.70	118.13	N/A	N/A	150	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

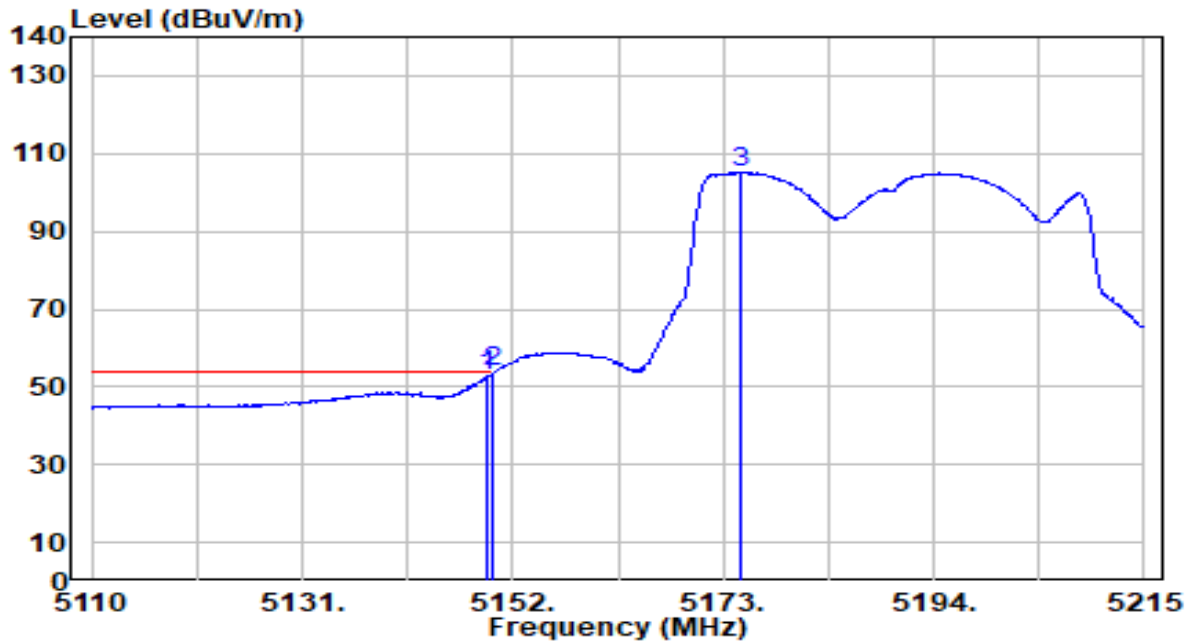


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.480	52.07	0.65	52.72	-1.28	54.00	150	350	Average
2	*	5150.000	53.07	0.65	53.72	-0.28	54.00	150	350	Average
3		5174.785	104.50	0.68	105.18	N/A	N/A	150	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

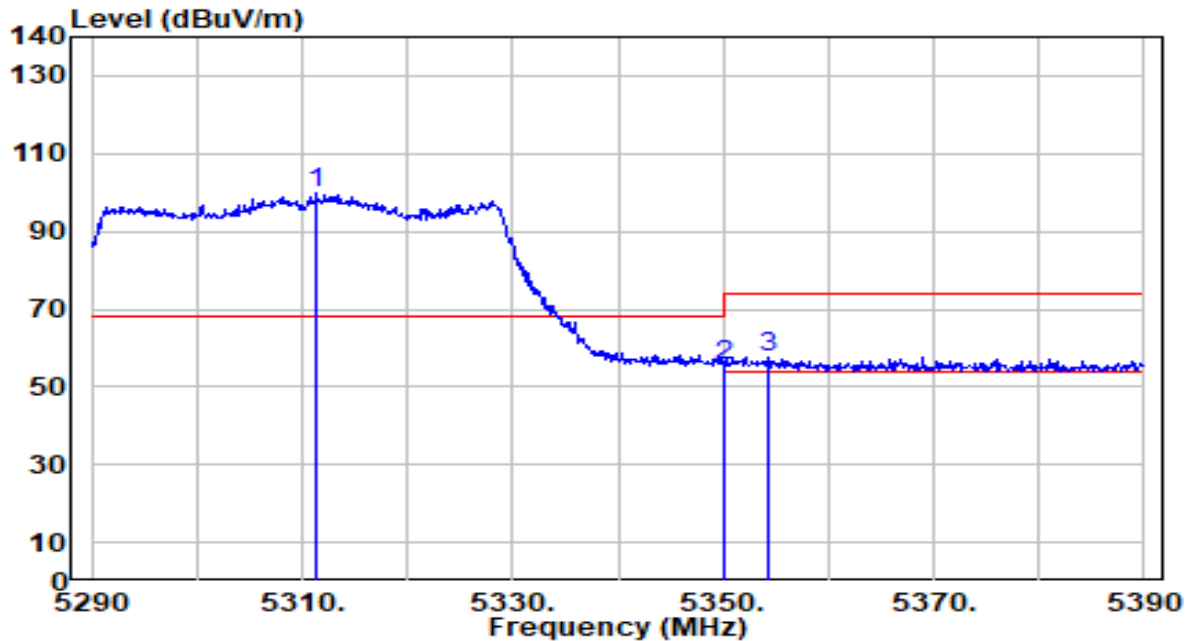


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.400	99.57	0.53	100.10	N/A	N/A	200	14	Peak
2	5350.000	54.96	0.47	55.43	-18.57	74.00	200	14	Peak
3	* 5354.400	57.19	0.46	57.66	-16.34	74.00	200	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

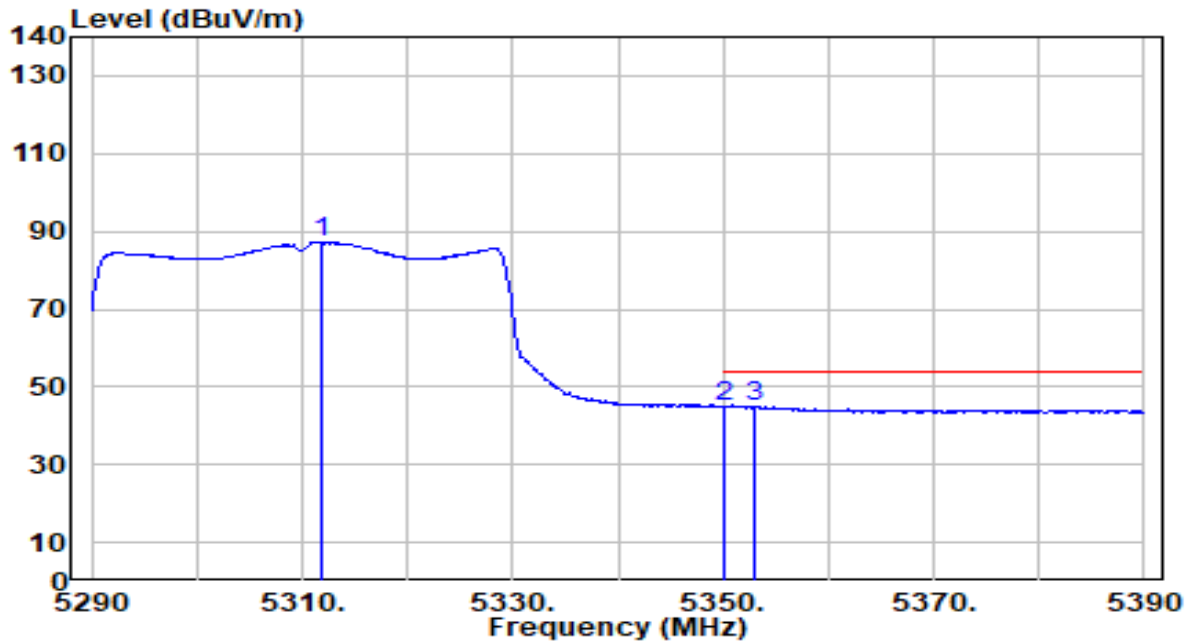


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.800	86.63	0.53	87.16	N/A	N/A	200	14	Average
2	5350.000	44.42	0.47	44.89	-9.11	54.00	200	14	Average
3	* 5352.900	44.53	0.47	45.00	-9.00	54.00	200	14	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

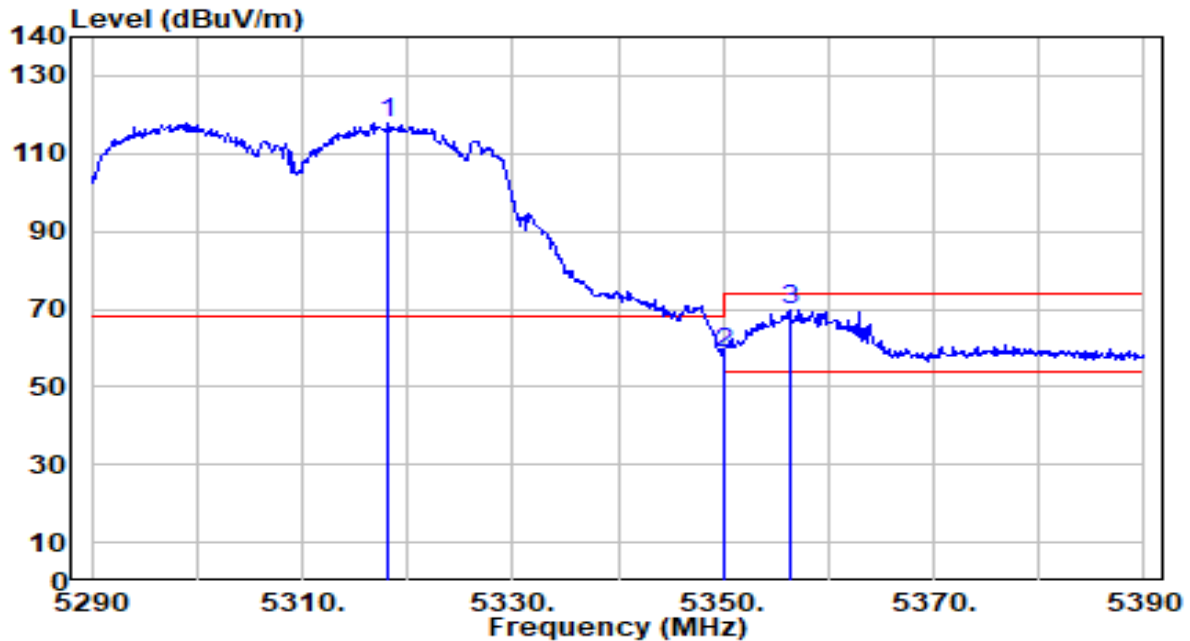


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.200	117.38	0.52	117.90	N/A	N/A	150	346	Peak
2	5350.000	58.29	0.47	58.77	-15.23	74.00	150	346	Peak
3	* 5356.400	69.25	0.46	69.71	-4.29	74.00	150	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

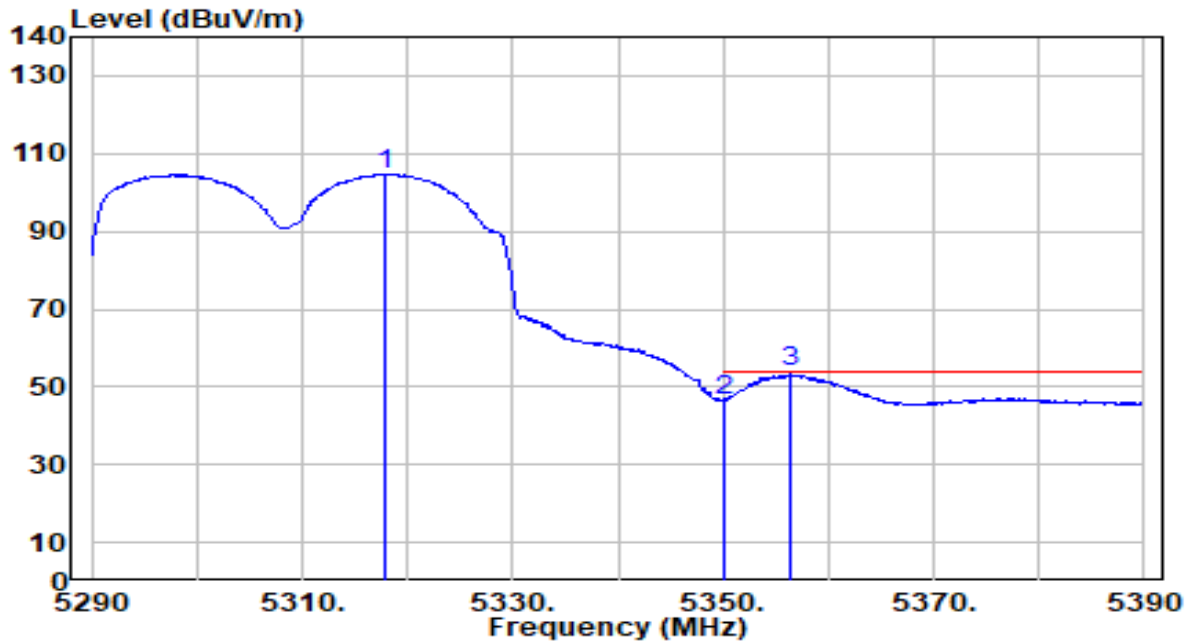


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.800	104.20	0.52	104.73	N/A	N/A	150	346	Average
2	5350.000	45.88	0.47	46.35	-7.65	54.00	150	346	Average
3	* 5356.400	53.33	0.46	53.79	-0.21	54.00	150	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

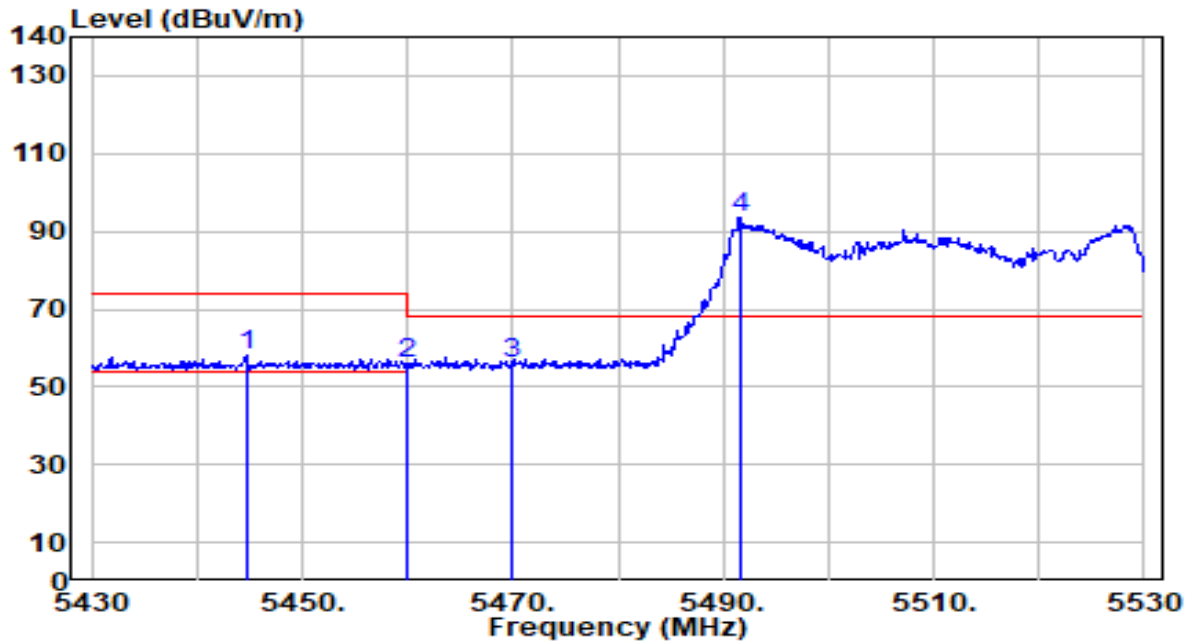


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.700	57.62	0.59	58.21	-15.79	74.00	200	316	Peak
2	5460.000	55.31	0.66	55.97	-18.03	74.00	200	316	Peak
3	* 5470.000	55.09	0.71	55.80	-12.40	68.20	200	316	Peak
4	5491.600	92.67	0.80	93.47	N/A	N/A	200	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

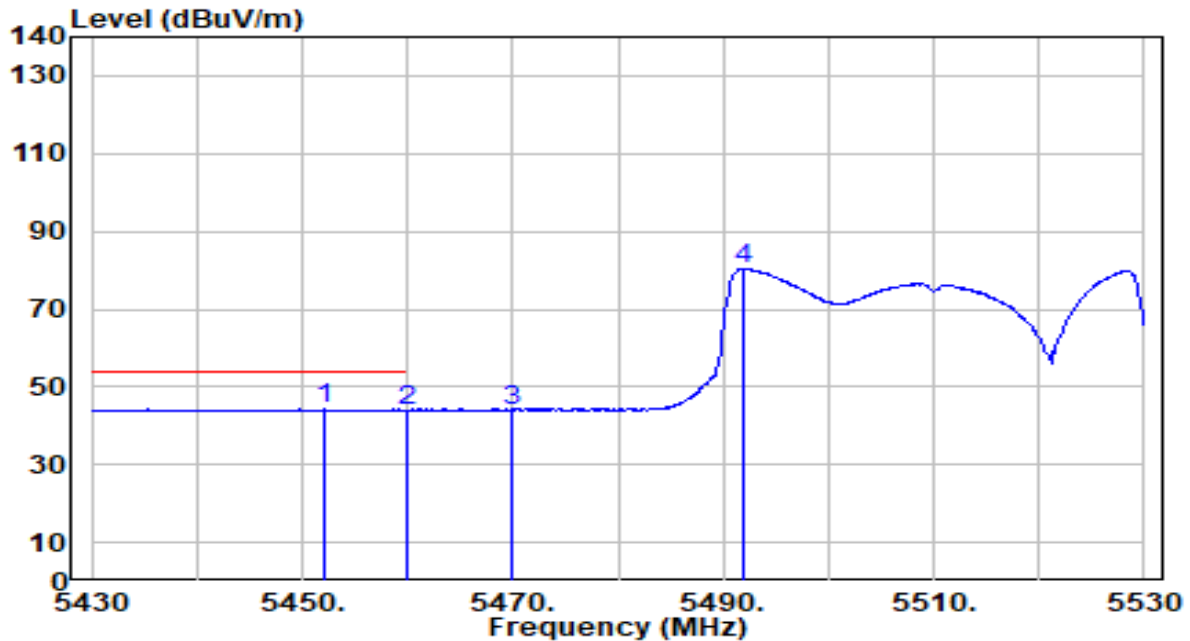


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.100	43.56	0.63	44.19	-9.81	54.00	200	316	Average
2		5460.000	43.26	0.66	43.92	-10.08	54.00	200	316	Average
3		5470.000	43.24	0.71	43.95	N/A	N/A	200	316	Average
4		5491.900	79.65	0.80	80.46	N/A	N/A	200	316	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

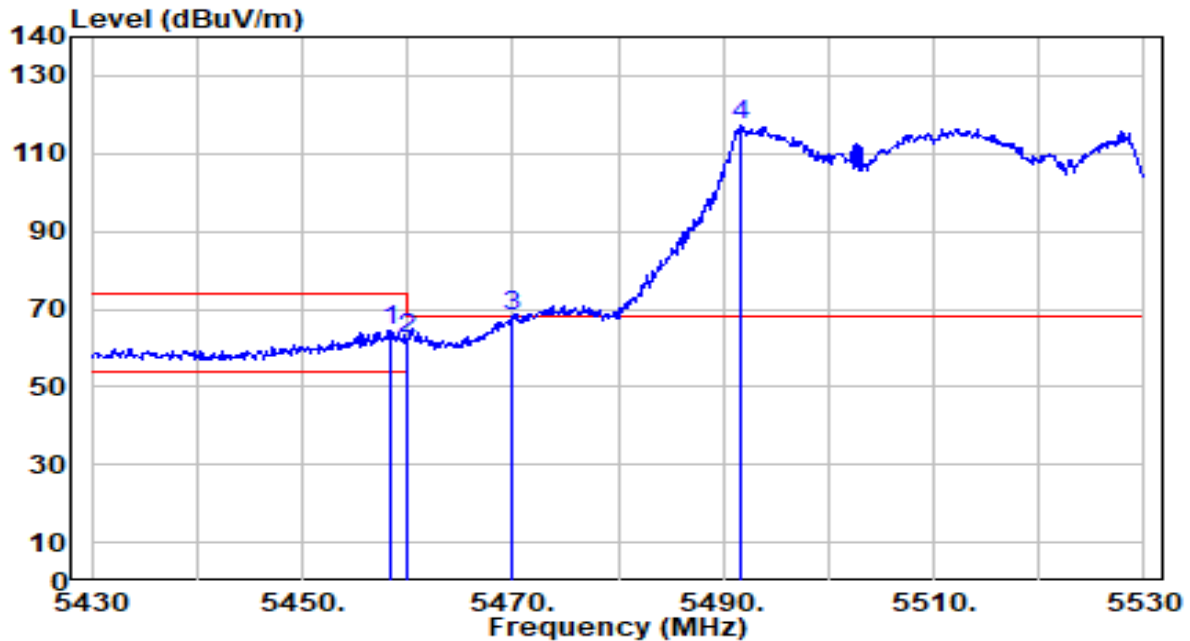


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.500	63.67	0.65	64.33	-9.67	74.00	150	166	Peak
2	5460.000	61.93	0.66	62.59	-11.41	74.00	150	166	Peak
3	* 5470.000	67.26	0.71	67.97	-0.23	68.20	150	166	Peak
4	5491.700	116.65	0.80	117.46	N/A	N/A	150	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

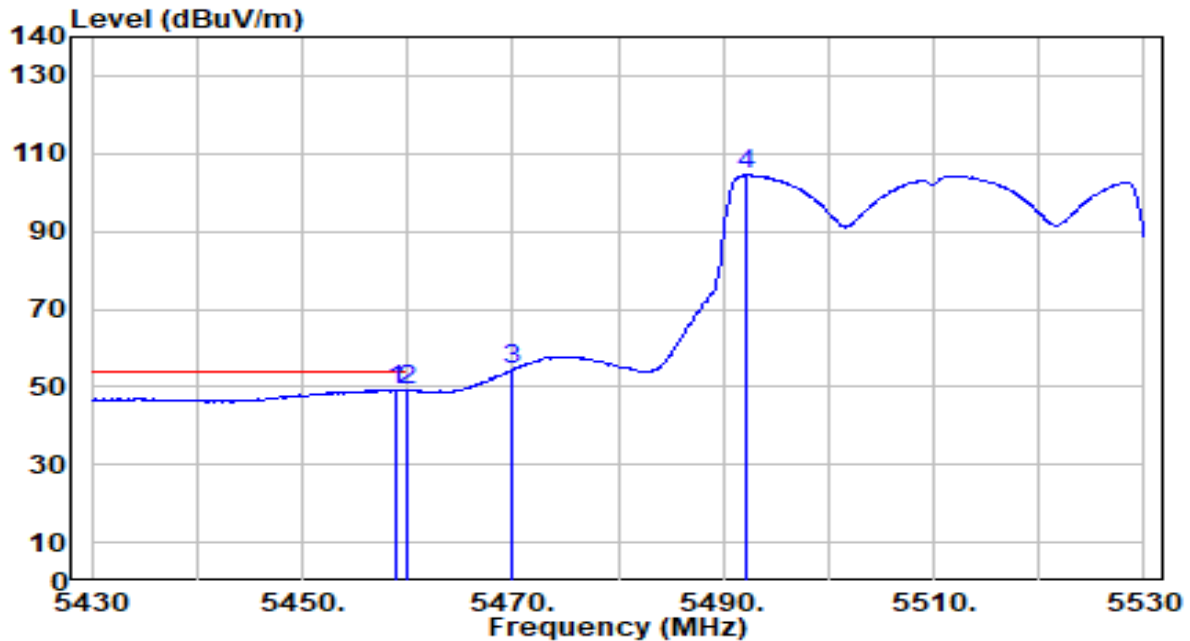


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.800	48.58	0.66	49.23	-4.77	54.00	150	166	Average
2		5460.000	48.36	0.66	49.02	-4.98	54.00	150	166	Average
3		5470.000	53.64	0.71	54.35	N/A	N/A	150	166	Average
4		5492.100	103.65	0.80	104.46	N/A	N/A	150	166	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

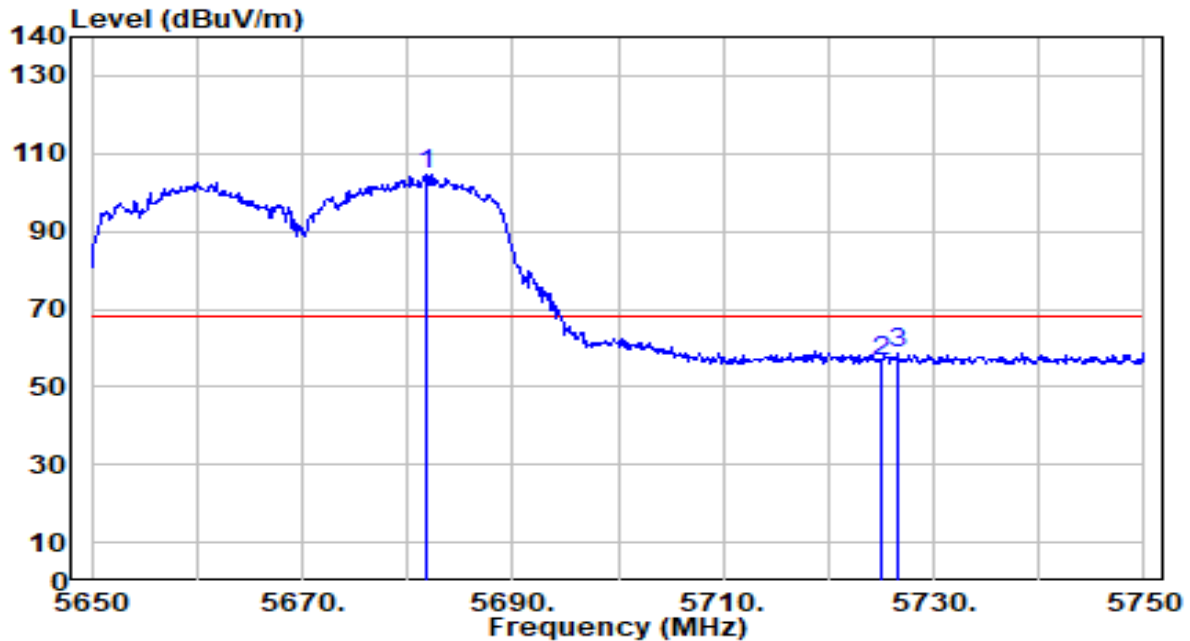


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5681.700	102.75	1.69	104.44	N/A	N/A	200	317	Peak
2	5725.000	54.89	1.89	56.79	-11.41	68.20	200	317	Peak
3	* 5726.600	56.65	1.90	58.55	-9.65	68.20	200	317	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

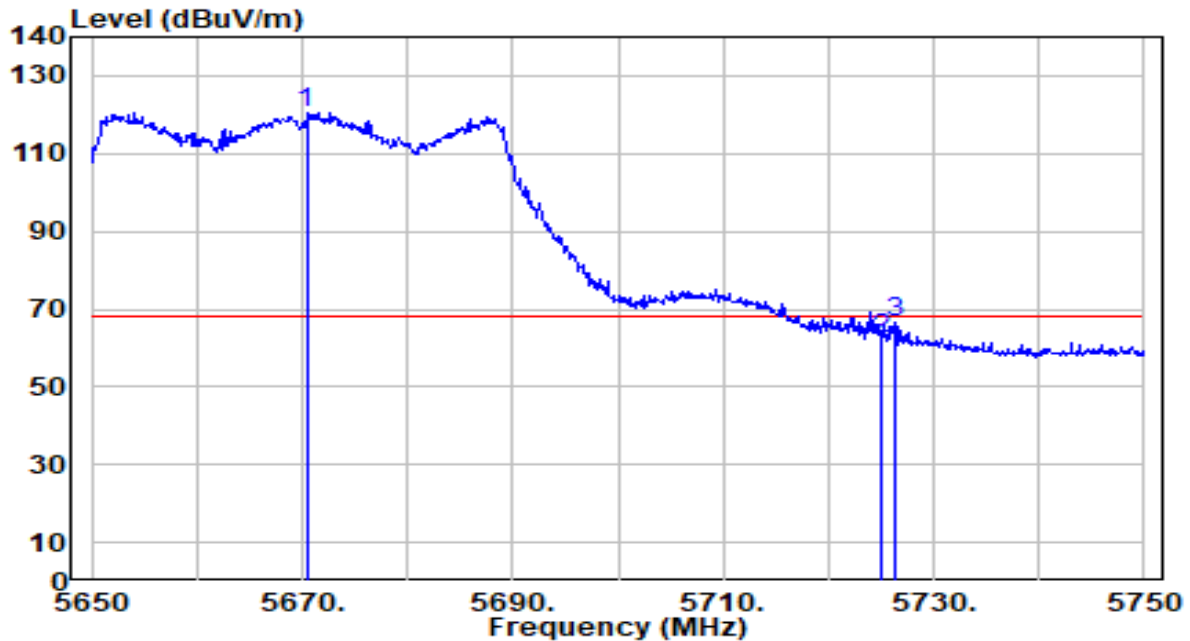


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5670.400	118.94	1.64	120.58	N/A	N/A	150	166	Peak
2	5725.000	60.69	1.89	62.58	-5.62	68.20	150	166	Peak
3	* 5726.400	64.53	1.90	66.43	-1.77	68.20	150	166	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

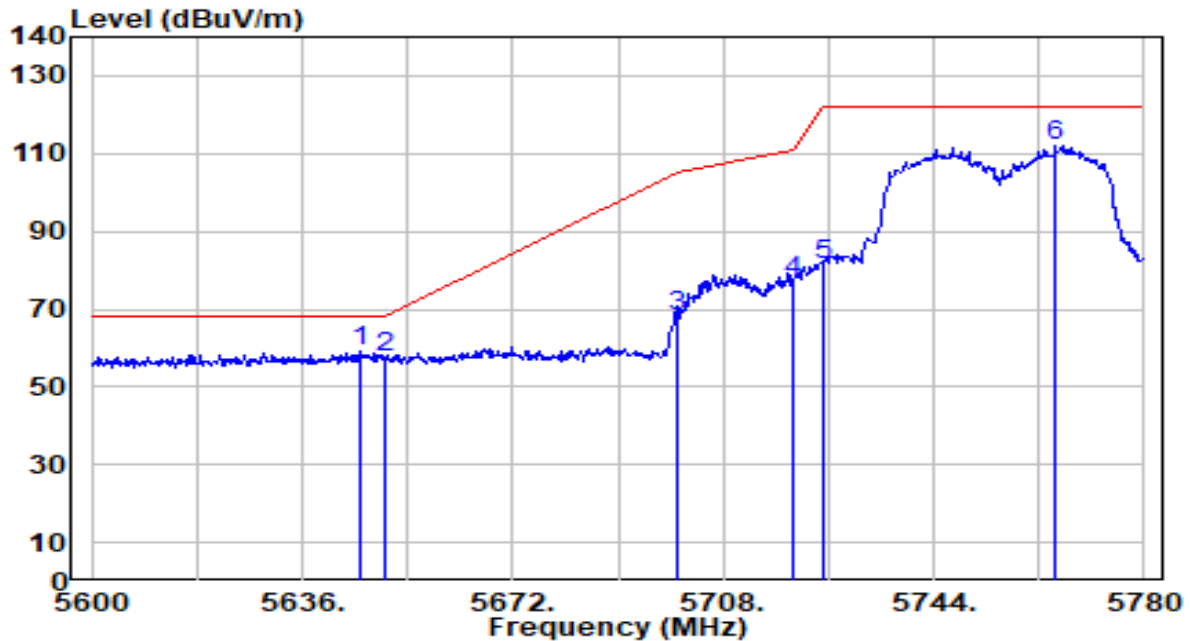


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.900	57.75	1.52	59.27	-8.93	68.20	100	174	Peak
2		5650.000	56.16	1.54	57.70	-10.50	68.20	100	174	Peak
3		5700.000	66.39	1.78	68.17	-37.03	105.20	100	174	Peak
4		5720.000	75.29	1.87	77.16	-33.64	110.80	100	174	Peak
5		5725.000	79.30	1.89	81.19	-41.01	122.20	100	174	Peak
6		5764.700	109.70	2.08	111.77	N/A	N/A	100	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

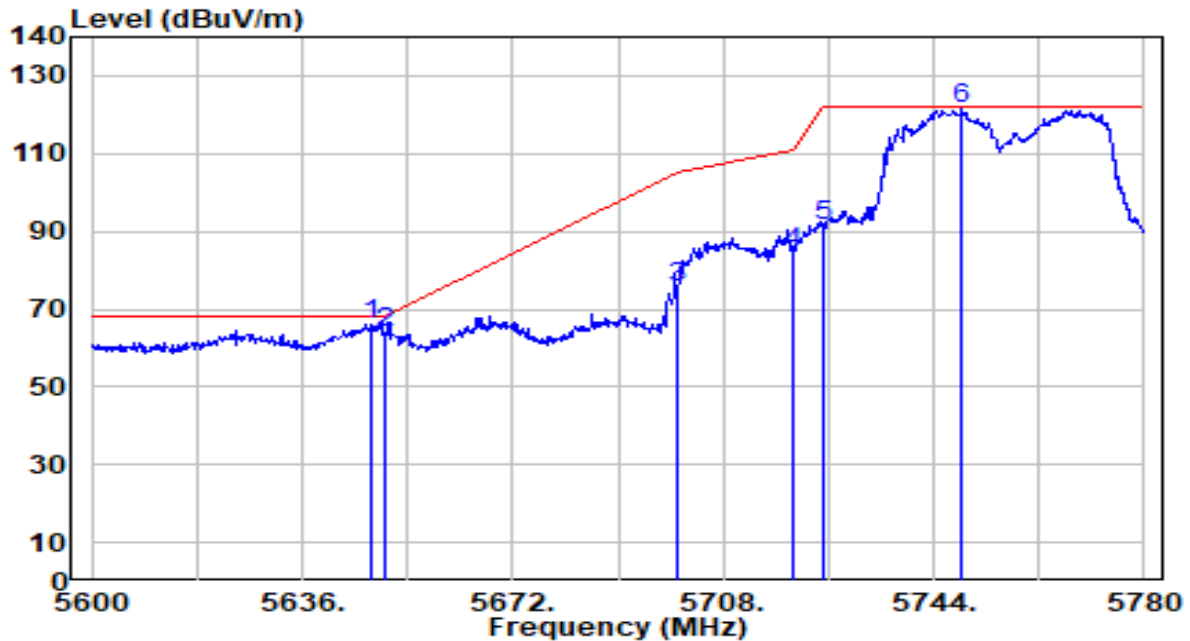


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.880	64.60	1.53	66.13	-2.07	68.20	100	351	Peak
2		5650.000	62.13	1.54	63.68	-4.52	68.20	100	351	Peak
3		5700.000	74.02	1.78	75.80	-29.40	105.20	100	351	Peak
4		5720.000	82.82	1.87	84.69	-26.11	110.80	100	351	Peak
5		5725.000	89.39	1.89	91.28	-30.92	122.20	100	351	Peak
6		5748.680	119.34	2.00	121.34	N/A	N/A	100	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-19
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

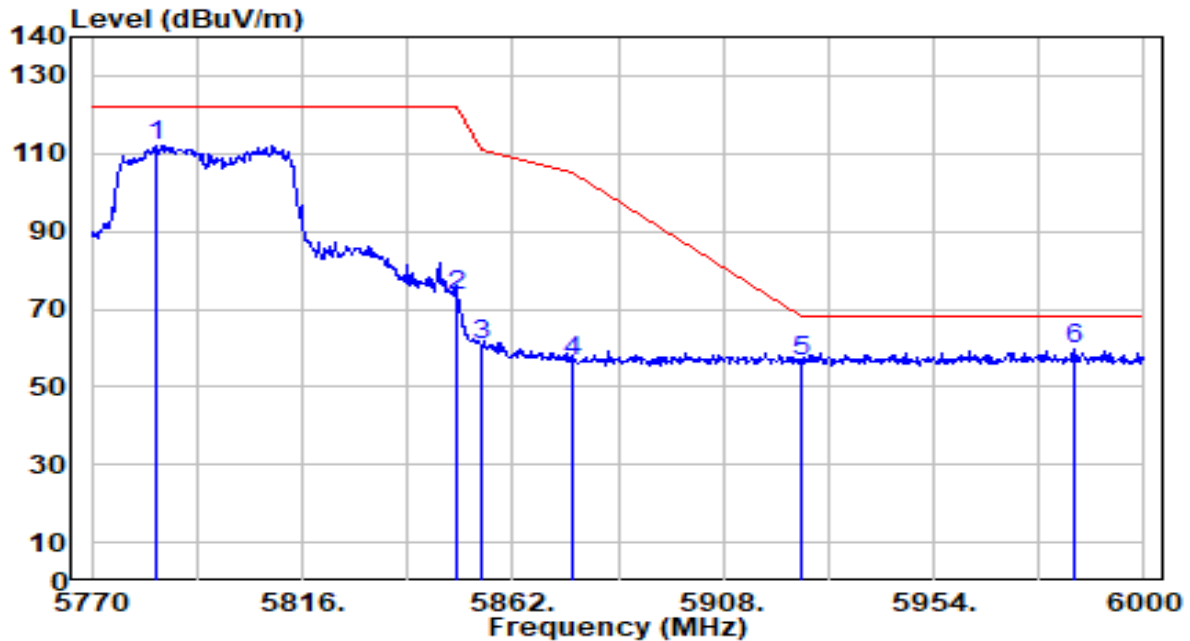

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5784.030	109.96	2.17	112.13	N/A	N/A	100	219	Peak
2	5850.000	71.07	2.25	73.32	-48.88	122.20	100	219	Peak
3	5855.000	58.27	2.25	60.53	-50.27	110.80	100	219	Peak
4	5875.000	54.44	2.26	56.70	-48.50	105.20	100	219	Peak
5	5925.000	54.45	2.27	56.72	-11.48	68.20	100	219	Peak
6	* 5984.590	57.58	2.28	59.85	-8.35	68.20	100	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.