



802.11 n20 CH01 (2412MHz)




802.11 n20 CH01 (2412MHz)

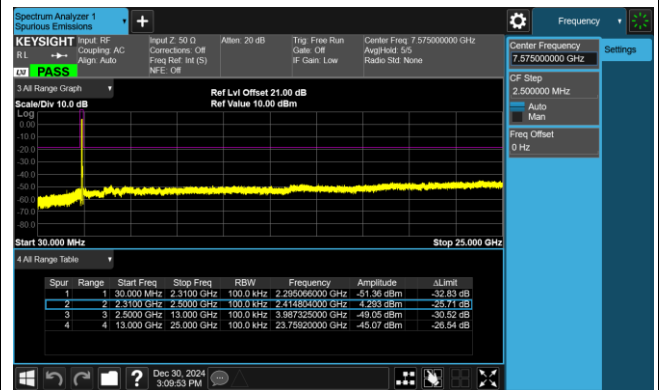


802.11 n20 CH06 (2437MHz)

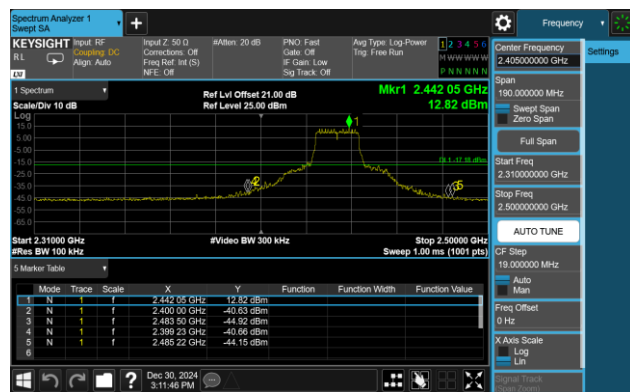


802.11 n20 CH06 (2437MHz)

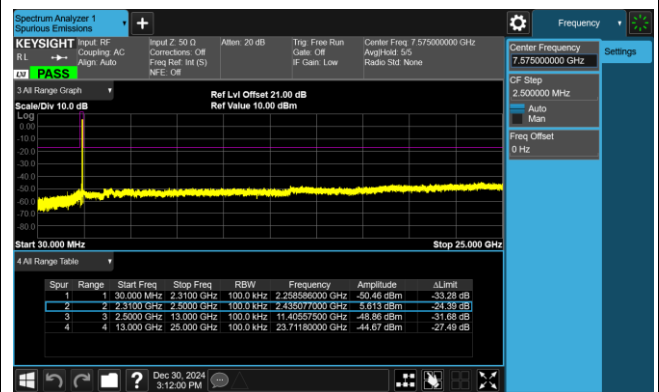

802.11 n20 CH11 (2462MHz)

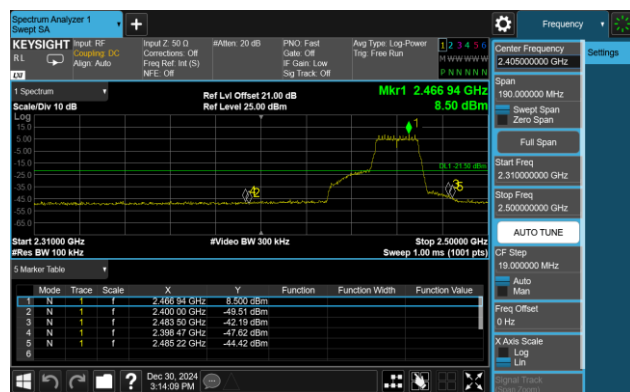


802.11 n20 CH11 (2462MHz)

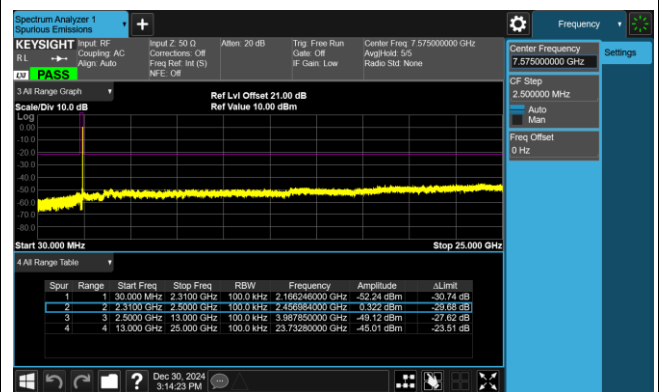


802.11 n40 CH03 (2422MHz)




802.11 n40 CH03 (2422MHz)

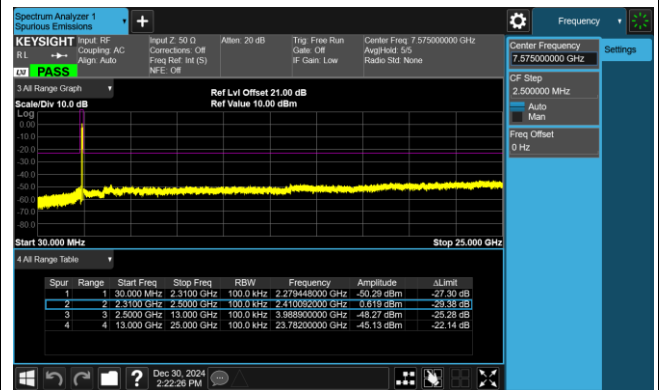

802.11 n40 CH06 (2437MHz)

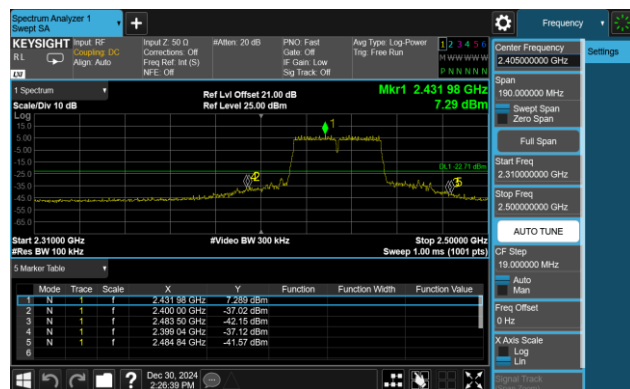


802.11 n40 CH06 (2437MHz)

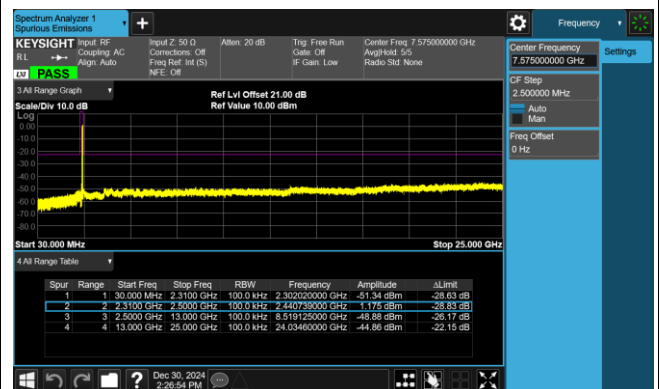

802.11 n40 CH09 (2452MHz)




802.11 n40 CH09 (2452MHz)

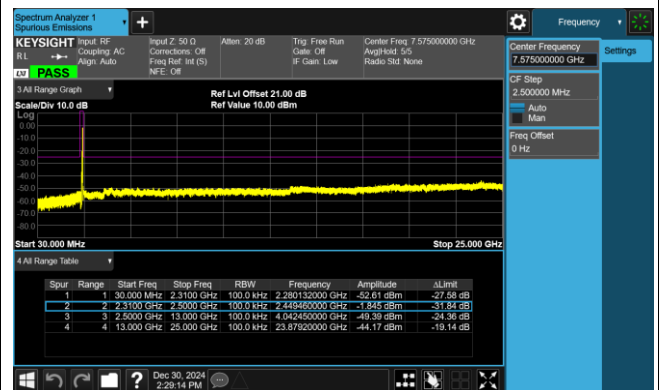


802.11 ax40 CH03 (2422MHz)




802.11 ax40 CH03 (2422MHz)

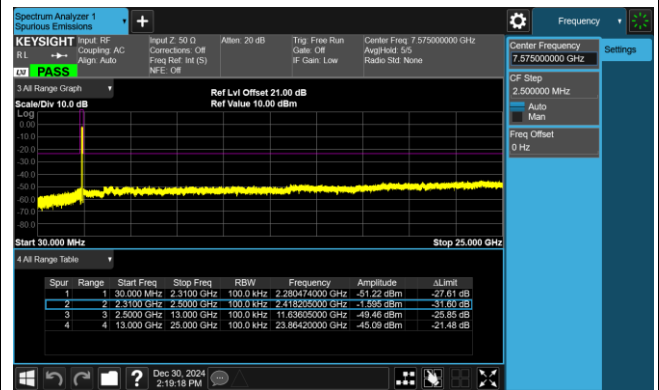

802.11 ax40 CH06 (2437MHz)

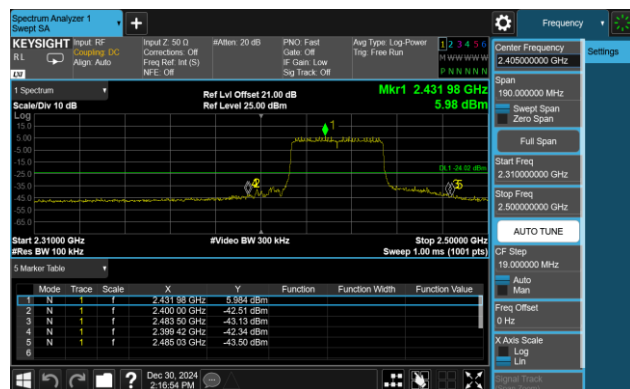


802.11 ax40 CH06 (2437MHz)

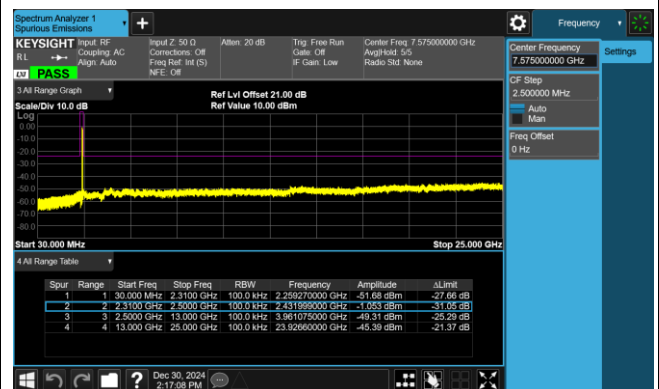

802.11 ax40 CH09 (2452MHz)




802.11 ax40 CH09 (2452MHz)

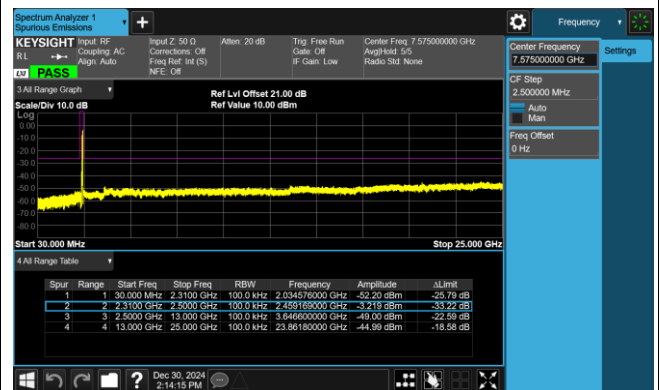


802.11be20 CH01 (2412MHz)




802.11be20 CH01 (2412MHz)

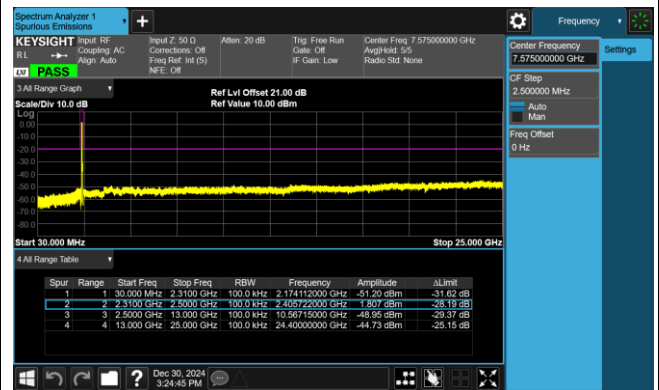

802.11be20 CH06 (2437MHz)

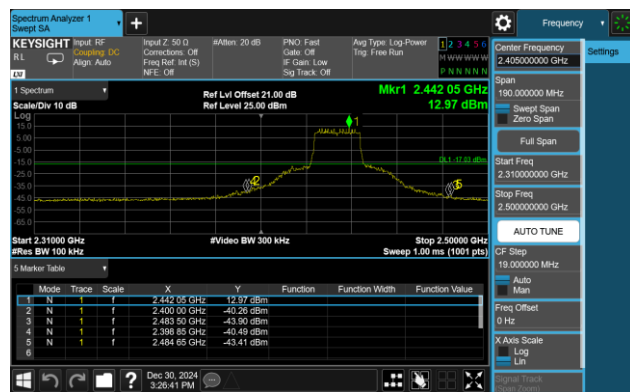


802.11be20 CH06 (2437MHz)

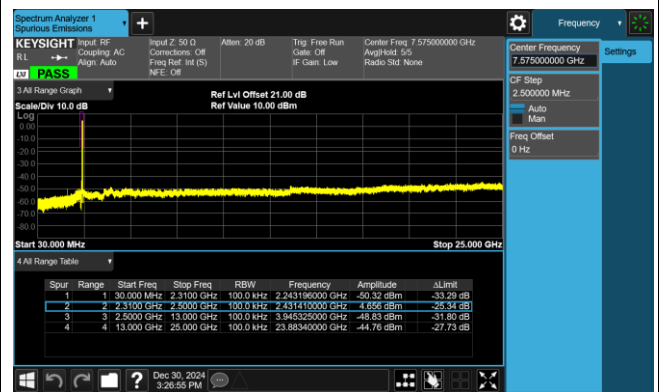

802.11be20 CH11 (2462MHz)




802.11be20 CH11 (2462MHz)

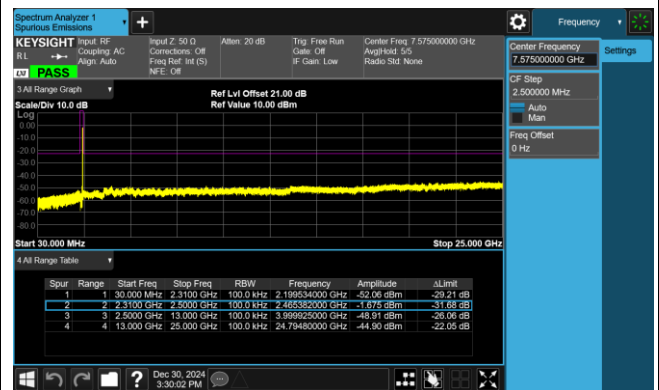

802.11be40 CH03 (2422MHz)




802.11be40 CH03 (2422MHz)

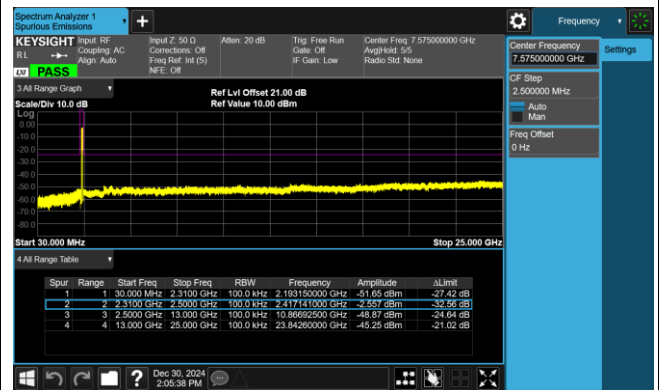

802.11be40 CH06 (2437MHz)




802.11be40 CH06 (2437MHz)

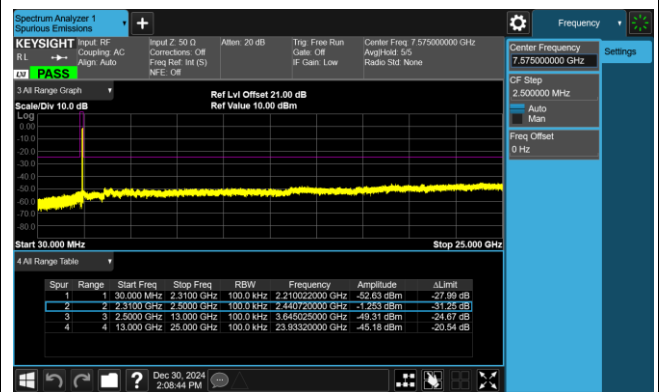

802.11be40 CH09 (2452MHz)



802.11be40 CH09 (2452MHz)

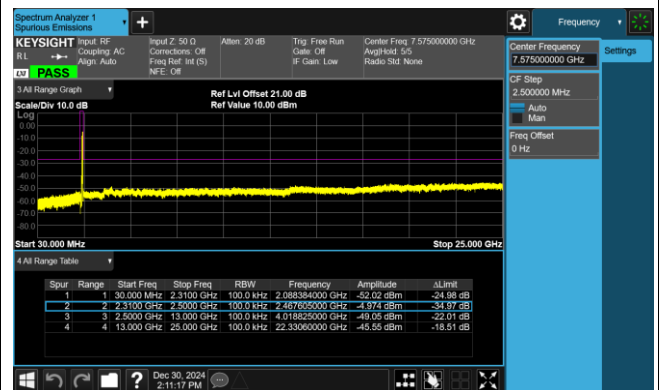

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

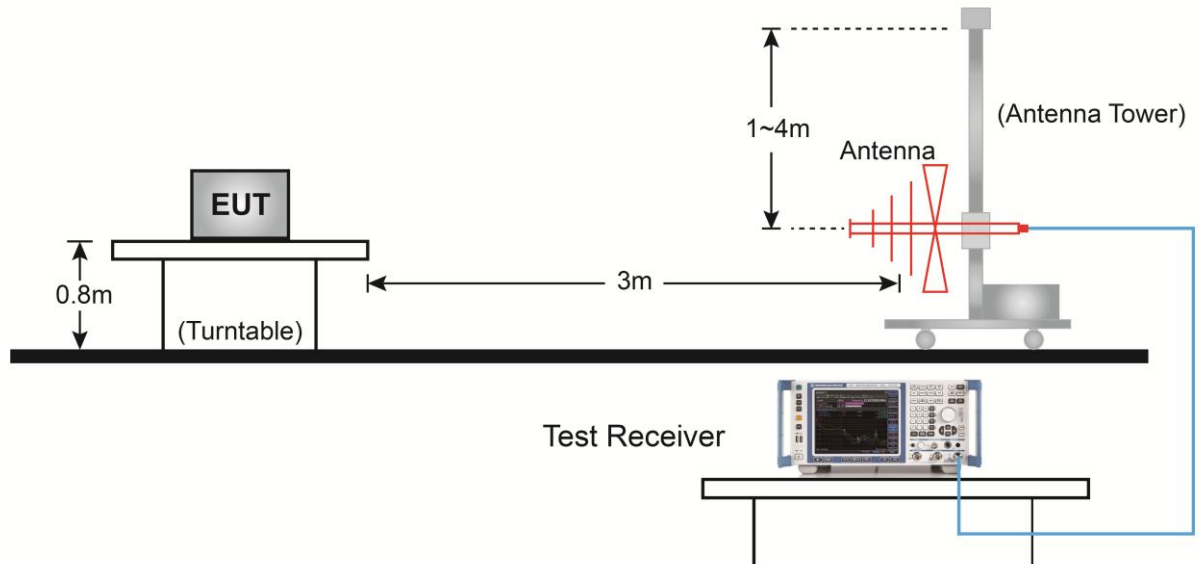


Above 1GHz Test Setup:

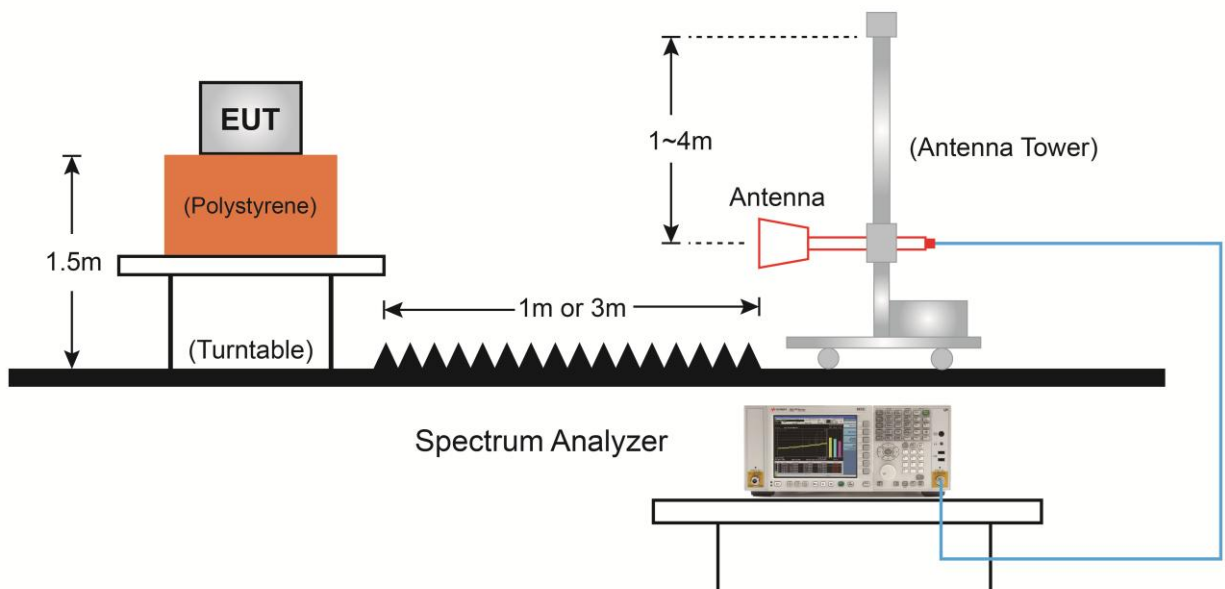

7.6.5. Test Result

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-25
Factor	VULB 9162	Temp. / Humidity	24°C /67%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

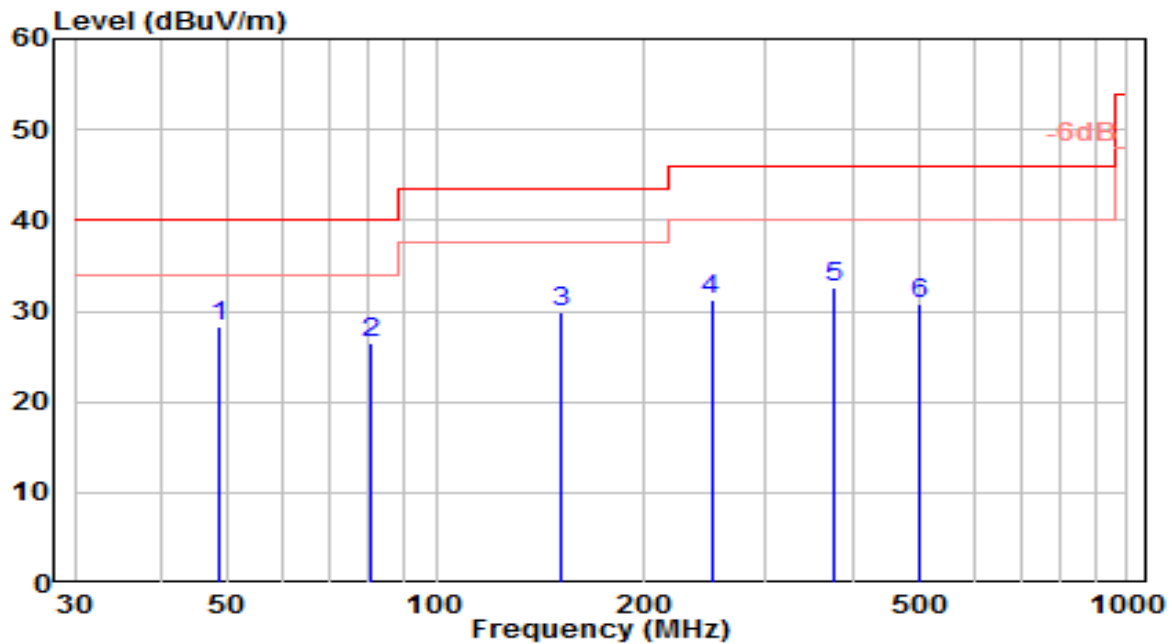


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	48.430	7.20	21.17	28.37	-11.63	40.00	150	55	QP
2		80.440	12.18	14.23	26.41	-13.59	40.00	150	190	QP
3		152.220	14.15	15.69	29.84	-13.66	43.50	150	220	QP
4		250.190	10.73	20.43	31.17	-14.83	46.00	100	215	QP
5		375.320	9.29	23.40	32.69	-13.31	46.00	100	165	QP
6		500.450	5.24	25.50	30.73	-15.27	46.00	150	245	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not

presented in the report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-25
Factor	VULB 9162	Temp. / Humidity	24°C /67%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

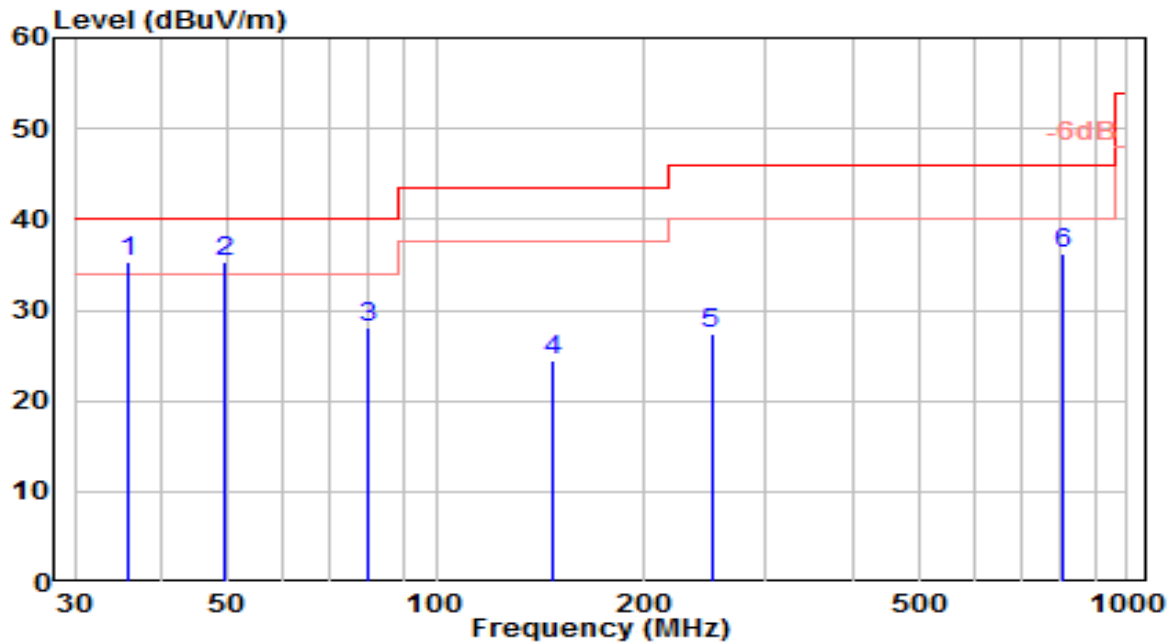


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.820	16.77	18.57	35.33	-4.67	40.00	100	210	QP
2		49.400	14.00	21.21	35.21	-4.79	40.00	100	335	QP
3		79.470	13.75	14.21	27.97	-12.03	40.00	150	315	QP
4		147.370	8.92	15.50	24.42	-19.08	43.50	150	310	QP
5		250.190	6.95	20.43	27.38	-18.62	46.00	150	250	QP
6		809.880	5.84	30.32	36.17	-9.83	46.00	150	175	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not

presented in the report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

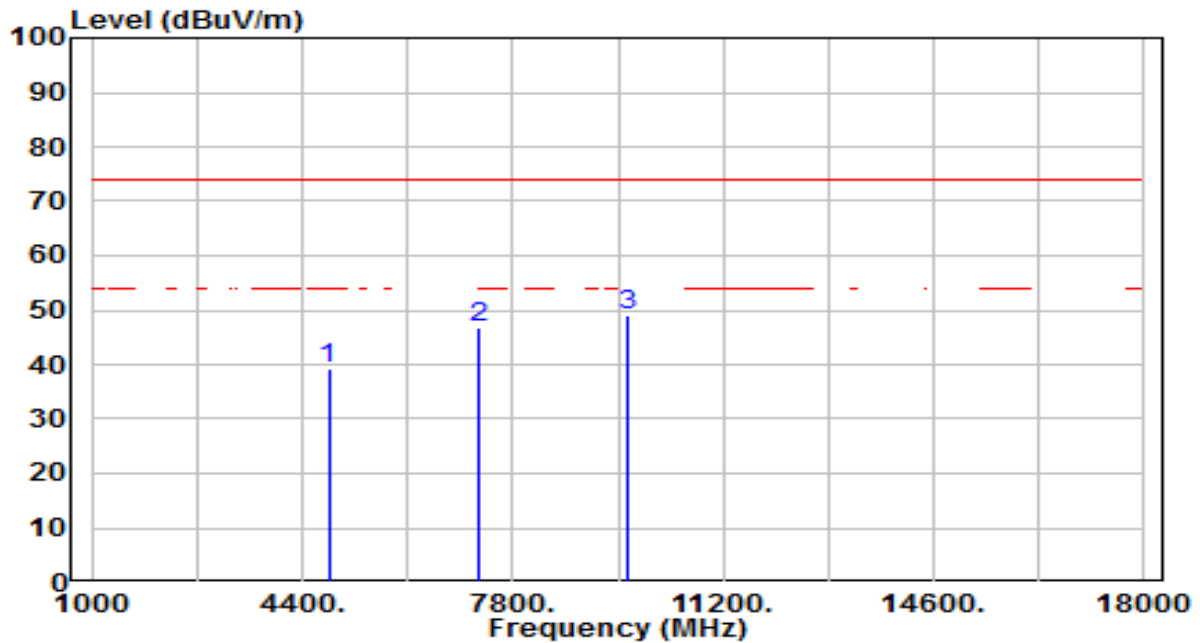


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.57	3.75	39.31	-34.69	74.00	100	321	Peak
2	7236.000	34.93	11.68	46.61	-27.39	74.00	100	136	Peak
3	* 9648.000	33.41	15.77	49.17	-24.83	74.00	100	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

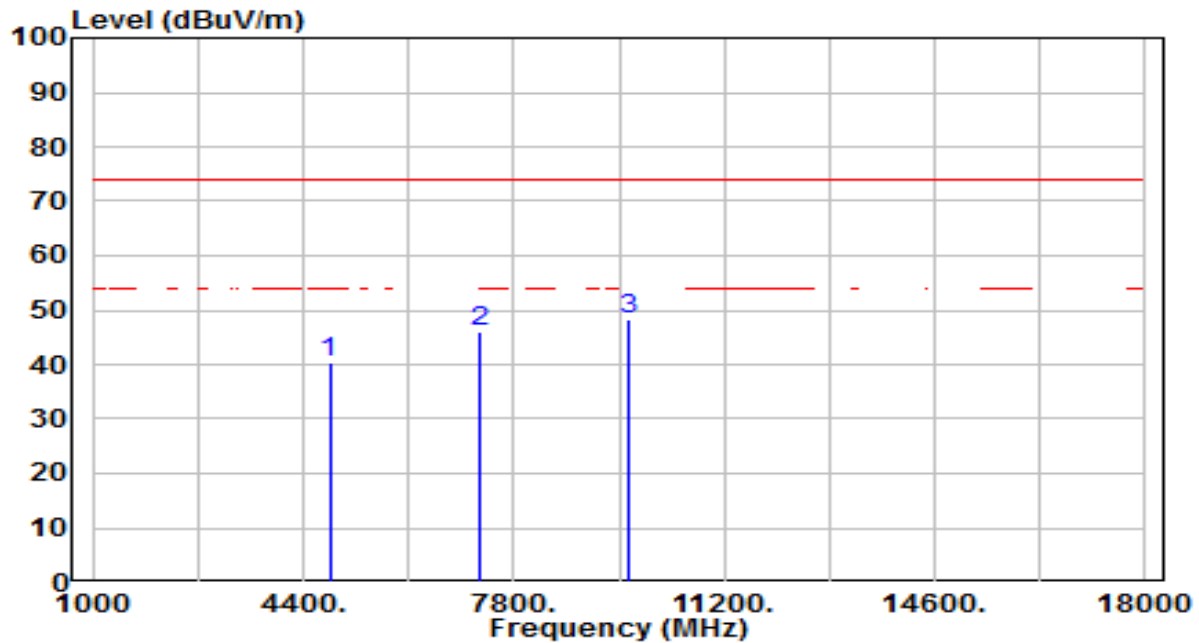


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	36.71	3.75	40.46	-33.54	74.00	100	0	Peak
2	7236.000	34.39	11.68	46.07	-27.93	74.00	100	360	Peak
3	* 9648.000	32.35	15.77	48.12	-25.88	74.00	100	59	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

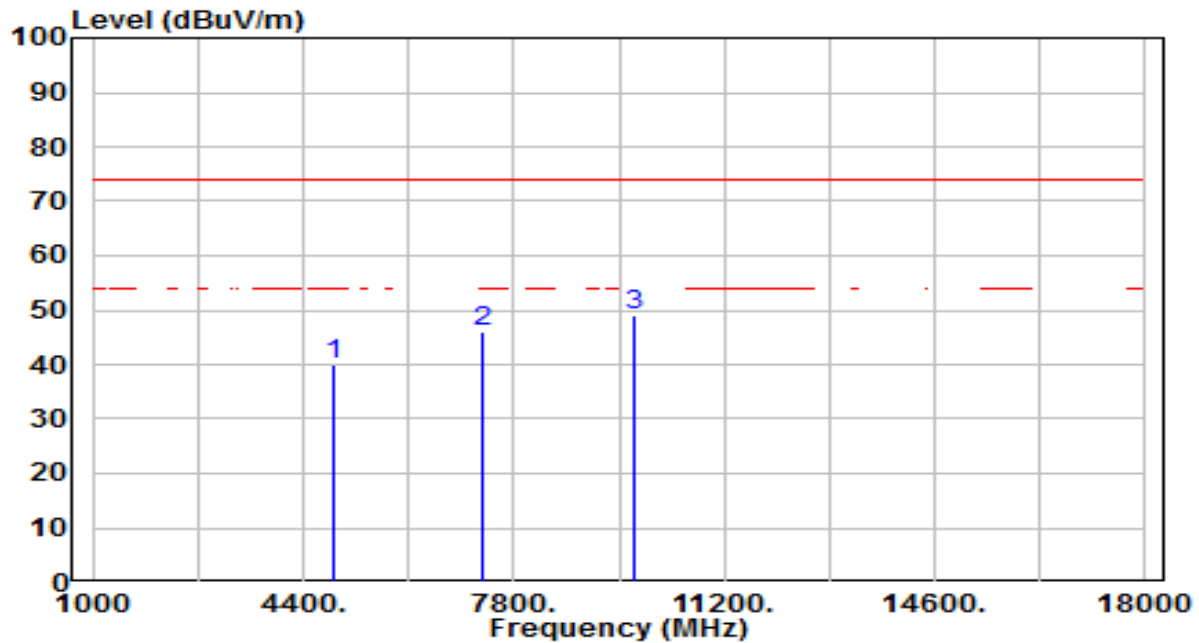


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.21	3.84	40.05	-33.95	74.00	100	196	Peak
2	7311.000	34.25	11.94	46.19	-27.81	74.00	100	360	Peak
3	* 9748.000	33.13	15.95	49.09	-24.91	74.00	100	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

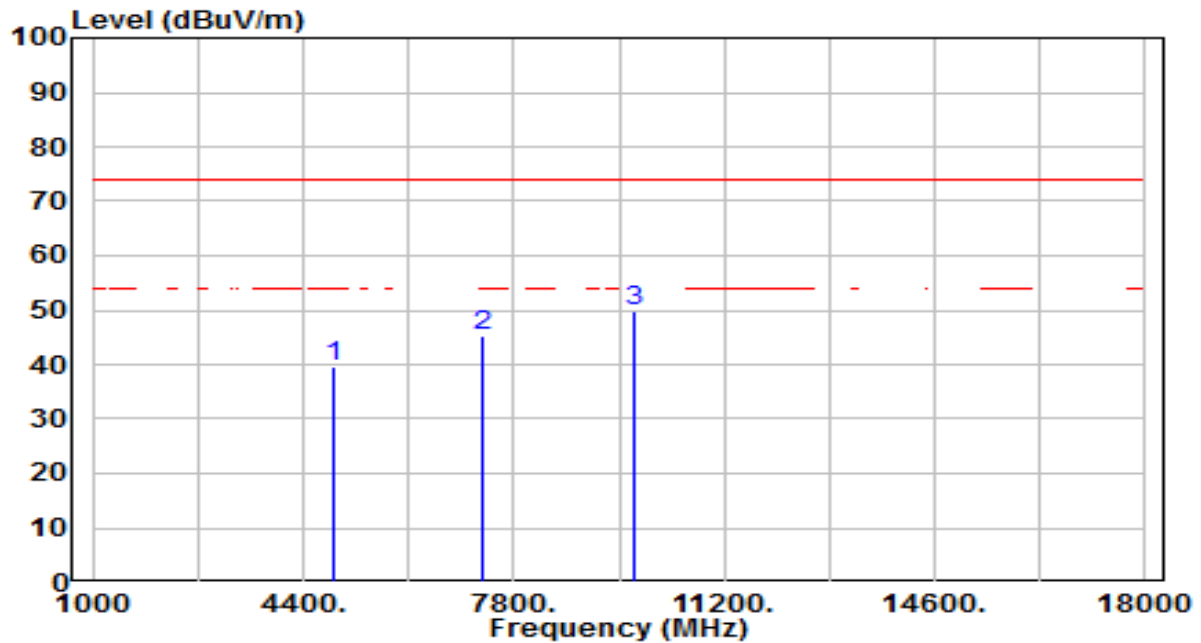


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.90	3.84	39.74	-34.26	74.00	100	48	Peak
2	7311.000	33.27	11.94	45.21	-28.79	74.00	100	241	Peak
3	* 9748.000	33.76	15.95	49.72	-24.28	74.00	100	16	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

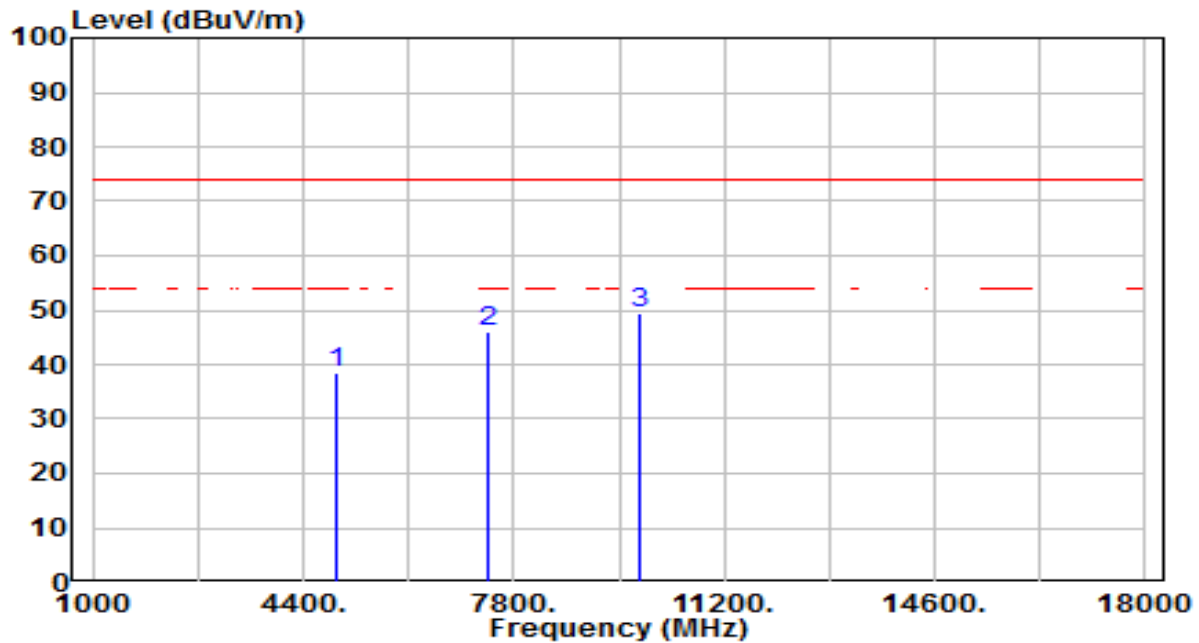


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.50	3.92	38.43	-35.57	74.00	100	9	Peak
2	7386.000	33.76	12.21	45.97	-28.03	74.00	100	218	Peak
3	* 9848.000	33.15	16.14	49.29	-24.71	74.00	100	162	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

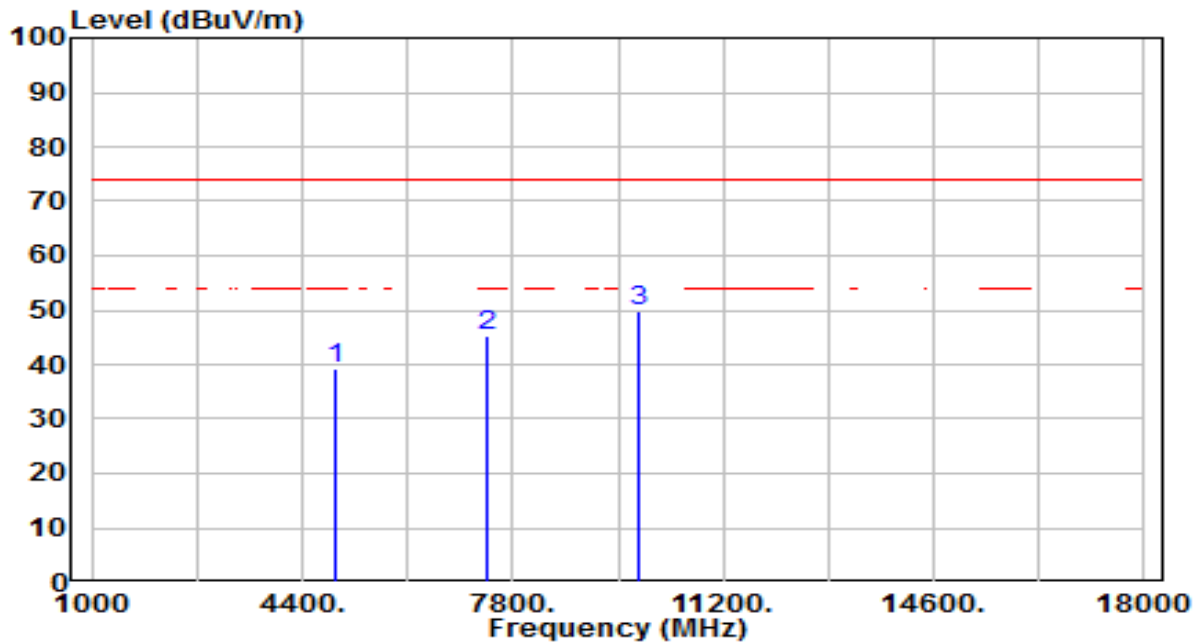


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.16	3.92	39.09	-34.91	74.00	100	158	Peak
2	7386.000	32.91	12.21	45.12	-28.88	74.00	100	25	Peak
3	* 9848.000	33.75	16.14	49.89	-24.11	74.00	100	203	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

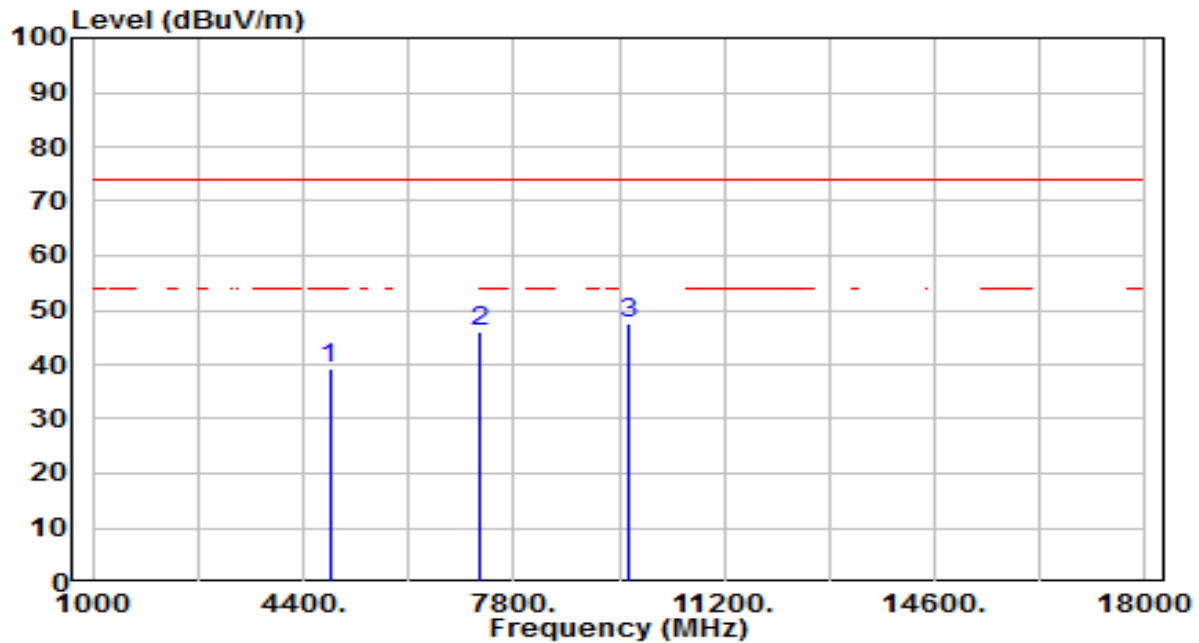


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.45	3.75	39.19	-34.81	74.00	100	0	Peak
2	7236.000	34.37	11.68	46.04	-27.96	74.00	100	168	Peak
3	* 9648.000	31.75	15.77	47.52	-26.48	74.00	100	30	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

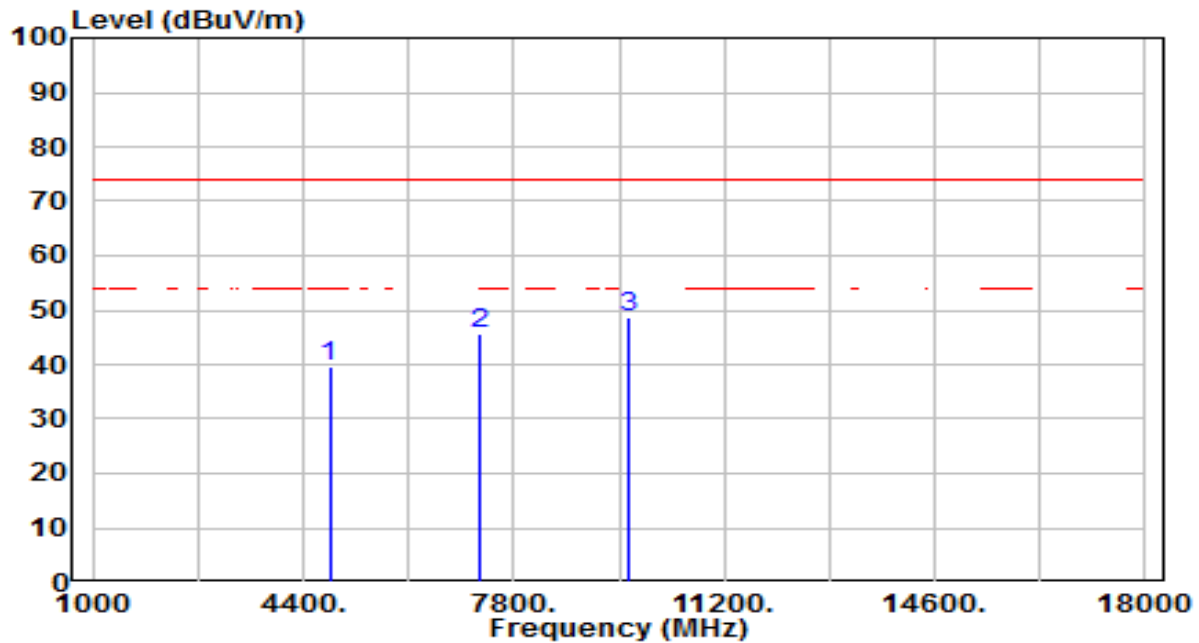


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.78	3.75	39.52	-34.48	74.00	100	354	Peak
2	7236.000	33.82	11.68	45.50	-28.50	74.00	100	336	Peak
3	* 9648.000	32.82	15.77	48.59	-25.41	74.00	100	293	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

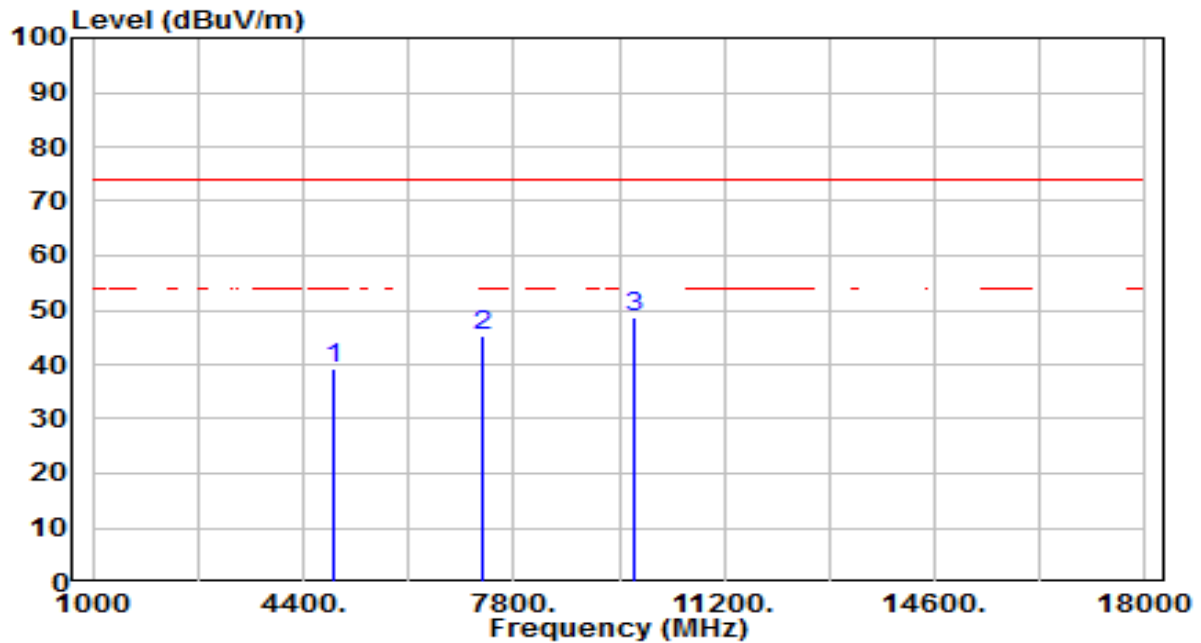


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.35	3.84	39.19	-34.81	74.00	100	0	Peak
2	7311.000	33.35	11.94	45.29	-28.71	74.00	100	256	Peak
3	* 9748.000	32.84	15.95	48.79	-25.21	74.00	100	1	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

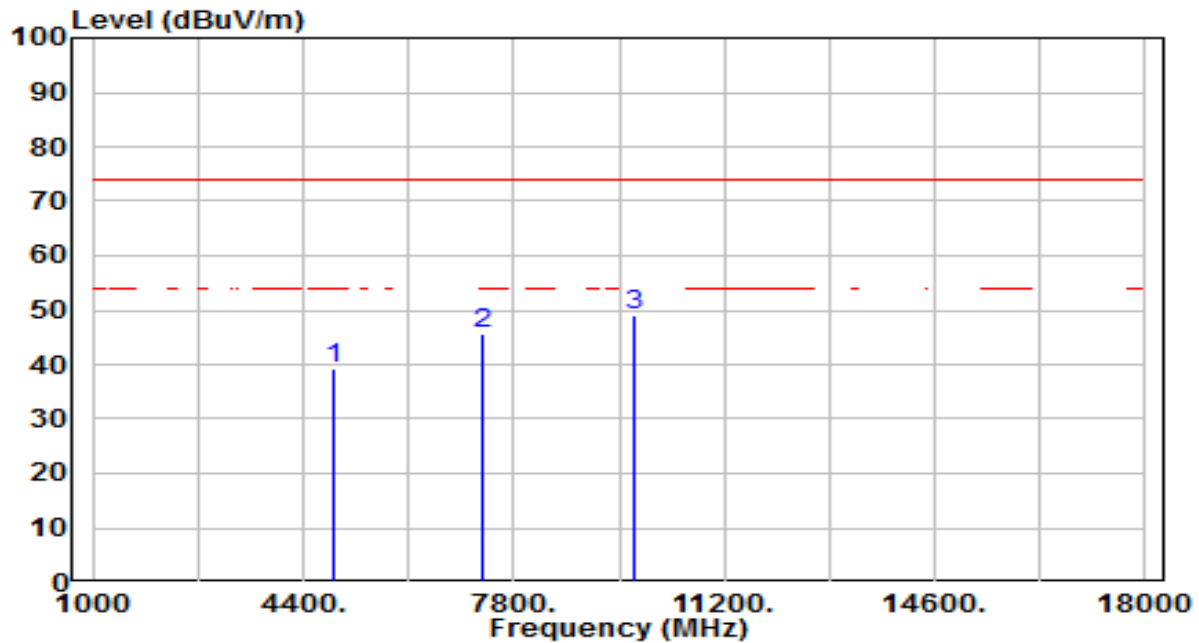


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.58	3.84	39.42	-34.58	74.00	100	303	Peak
2	7311.000	33.80	11.94	45.74	-28.26	74.00	100	208	Peak
3	* 9748.000	33.24	15.95	49.19	-24.81	74.00	100	179	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

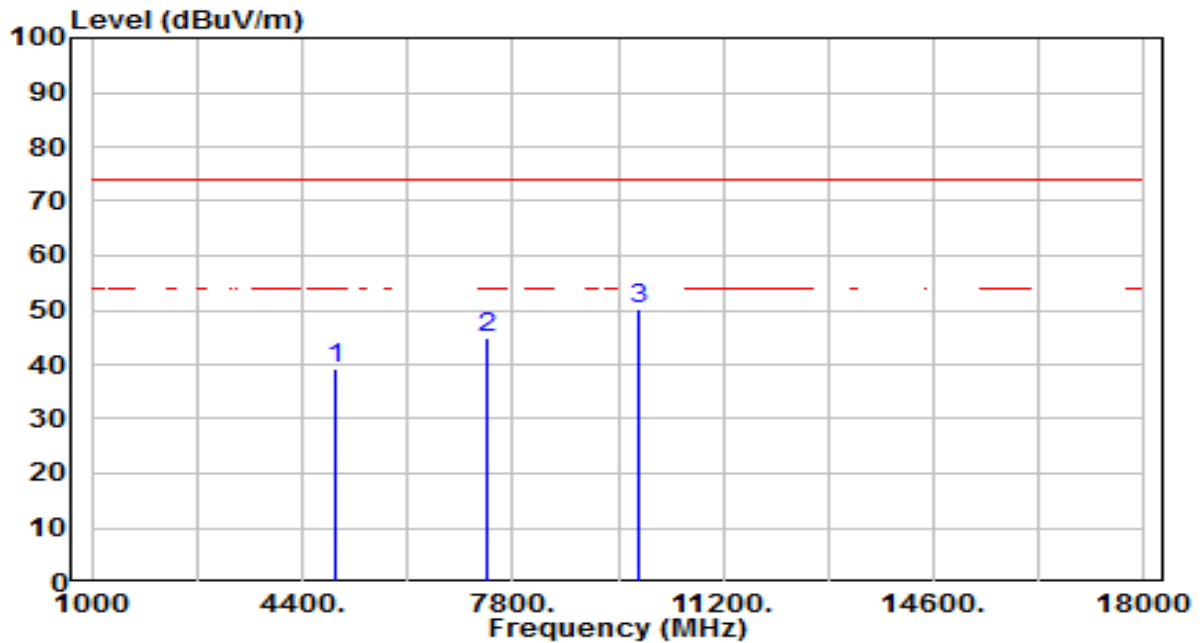


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.22	3.92	39.14	-34.86	74.00	100	258	Peak
2	7386.000	32.88	12.21	45.09	-28.91	74.00	100	71	Peak
3	* 9848.000	33.86	16.14	50.00	-24.00	74.00	100	82	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

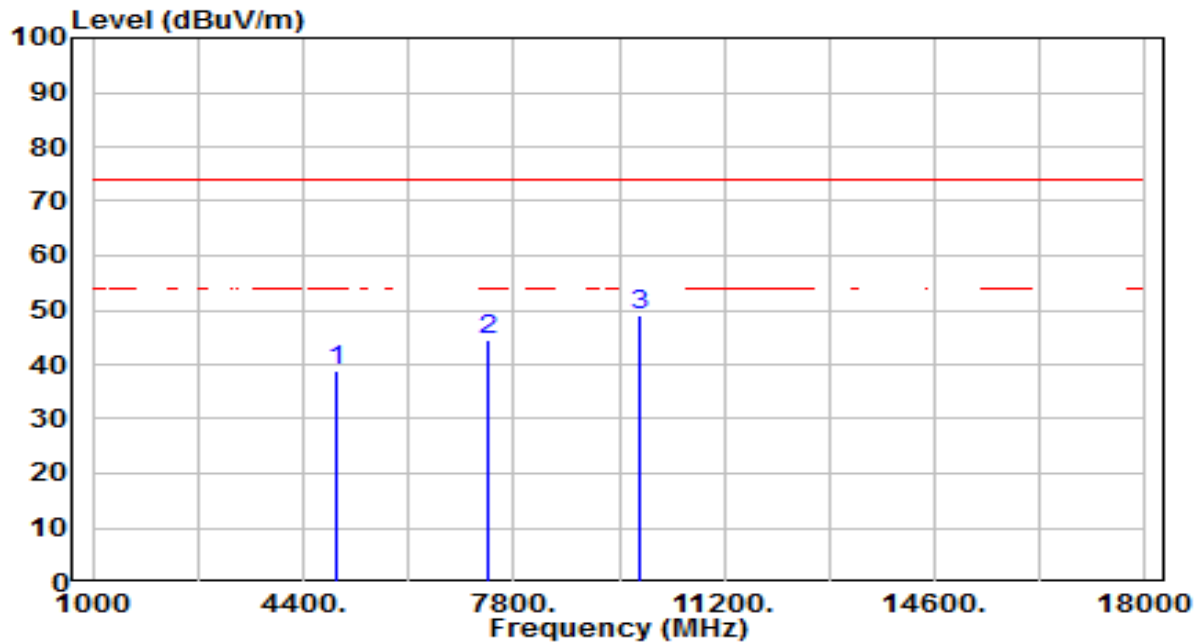


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	34.76	3.92	38.68	-35.32	74.00	100	222	Peak
2		7386.000	32.31	12.21	44.52	-29.48	74.00	100	52	Peak
3	*	9848.000	33.04	16.14	49.18	-24.82	74.00	100	113	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

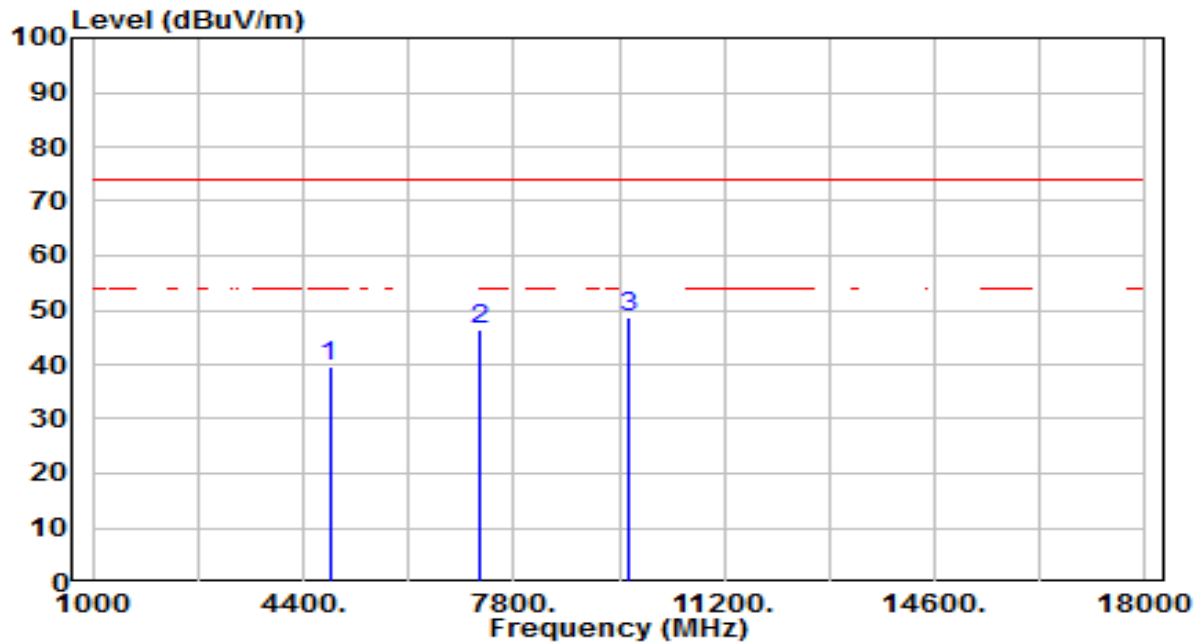


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.76	3.75	39.51	-34.49	74.00	100	185	Peak
2	7236.000	34.72	11.68	46.40	-27.60	74.00	100	315	Peak
3	* 9648.000	32.85	15.77	48.62	-25.38	74.00	100	75	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

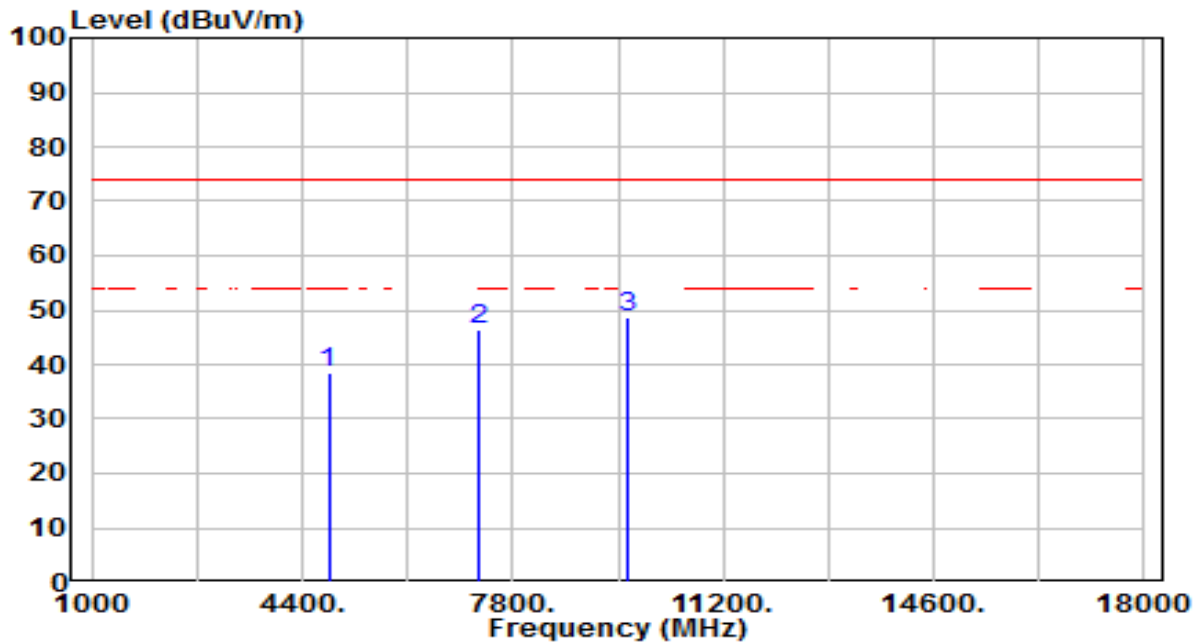


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.68	3.75	38.43	-35.57	74.00	100	54	Peak
2	7236.000	34.73	11.68	46.41	-27.59	74.00	100	76	Peak
3	* 9648.000	32.90	15.77	48.66	-25.34	74.00	100	335	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

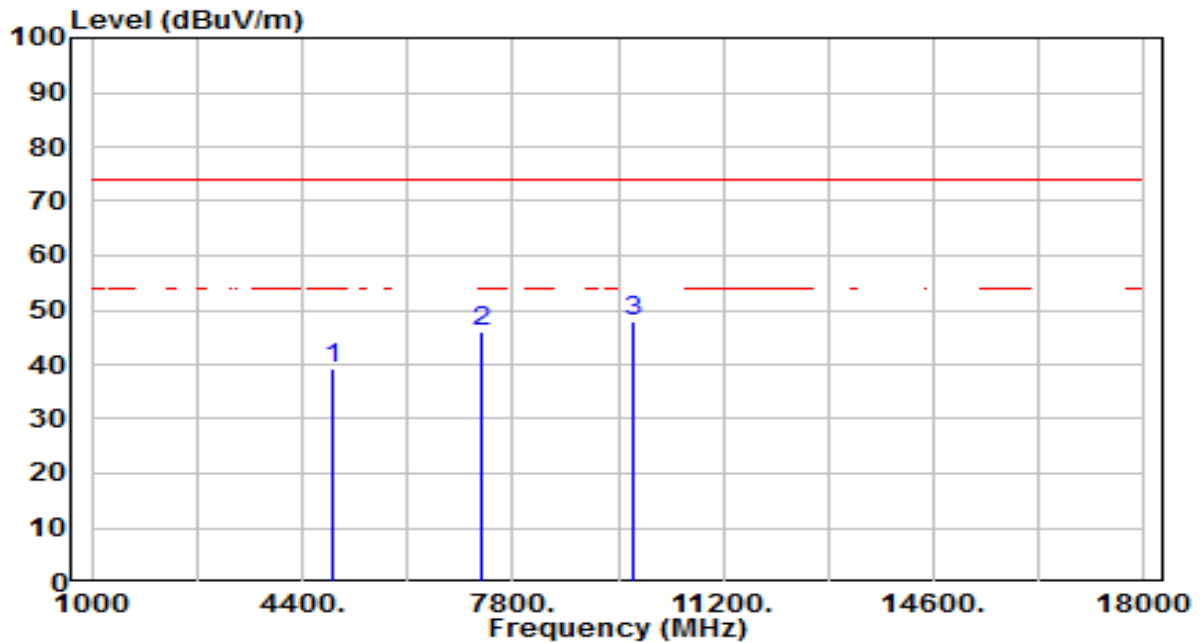


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.55	3.84	39.39	-34.61	74.00	100	262	Peak
2	7311.000	34.06	11.94	46.00	-28.00	74.00	100	167	Peak
3	* 9748.000	32.06	15.95	48.02	-25.98	74.00	100	4	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

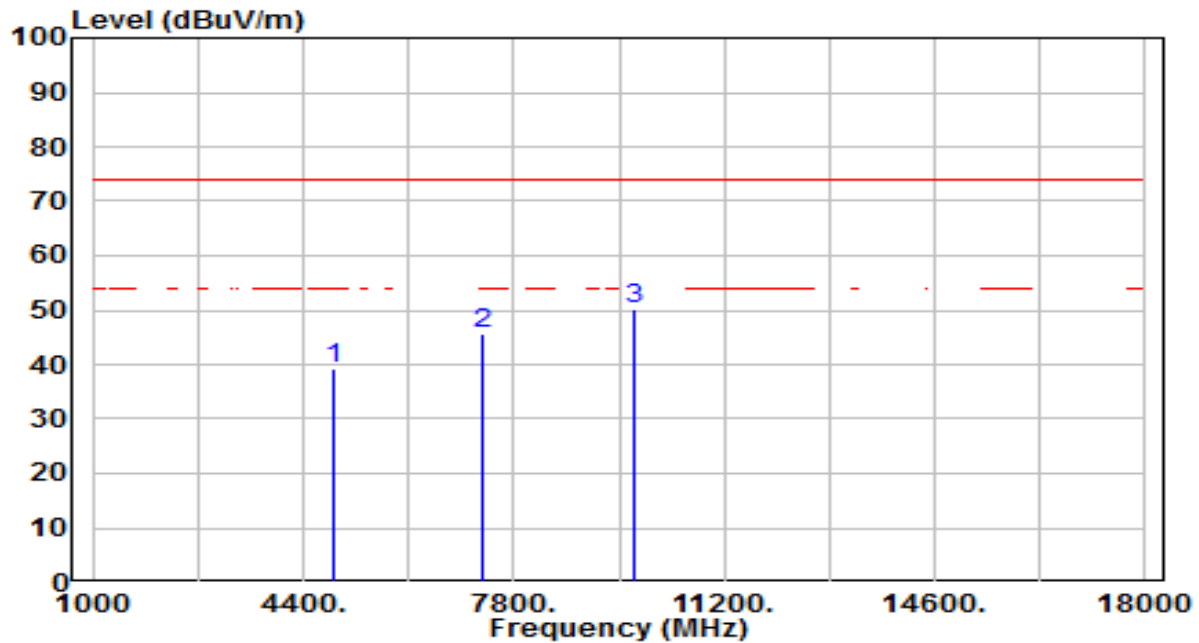


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.36	3.84	39.20	-34.80	74.00	100	45	Peak
2	7311.000	33.60	11.94	45.54	-28.46	74.00	100	209	Peak
3	* 9748.000	34.08	15.95	50.03	-23.97	74.00	100	272	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

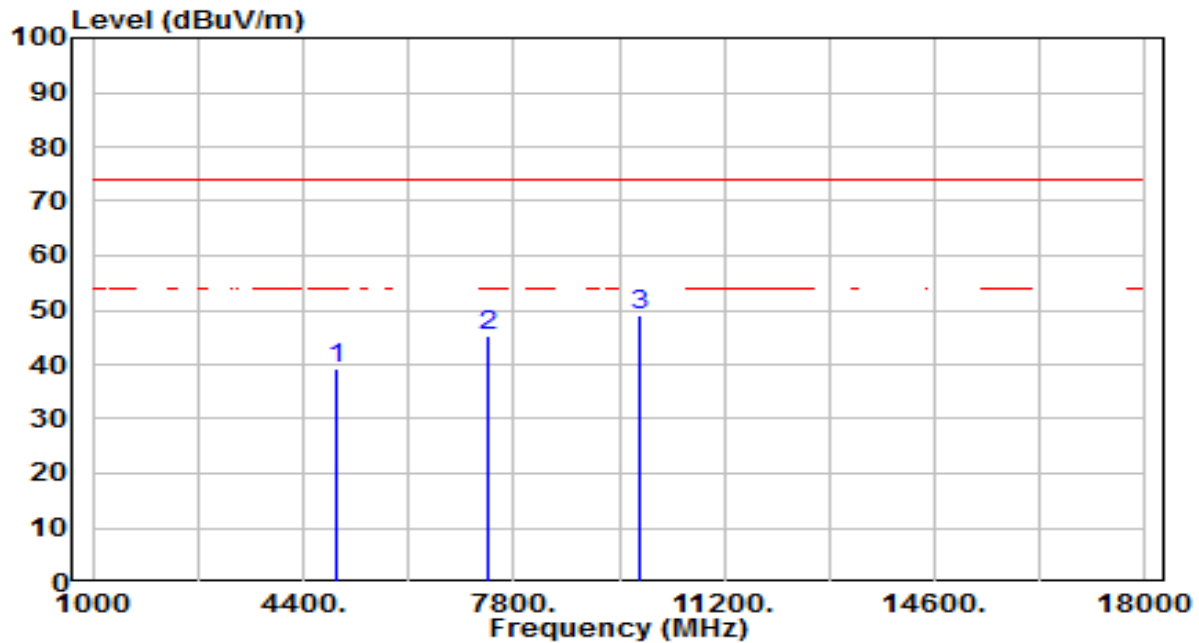


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.14	3.92	39.06	-34.94	74.00	100	244	Peak
2	7386.000	33.06	12.21	45.27	-28.73	74.00	100	220	Peak
3	* 9848.000	33.01	16.14	49.15	-24.85	74.00	100	138	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

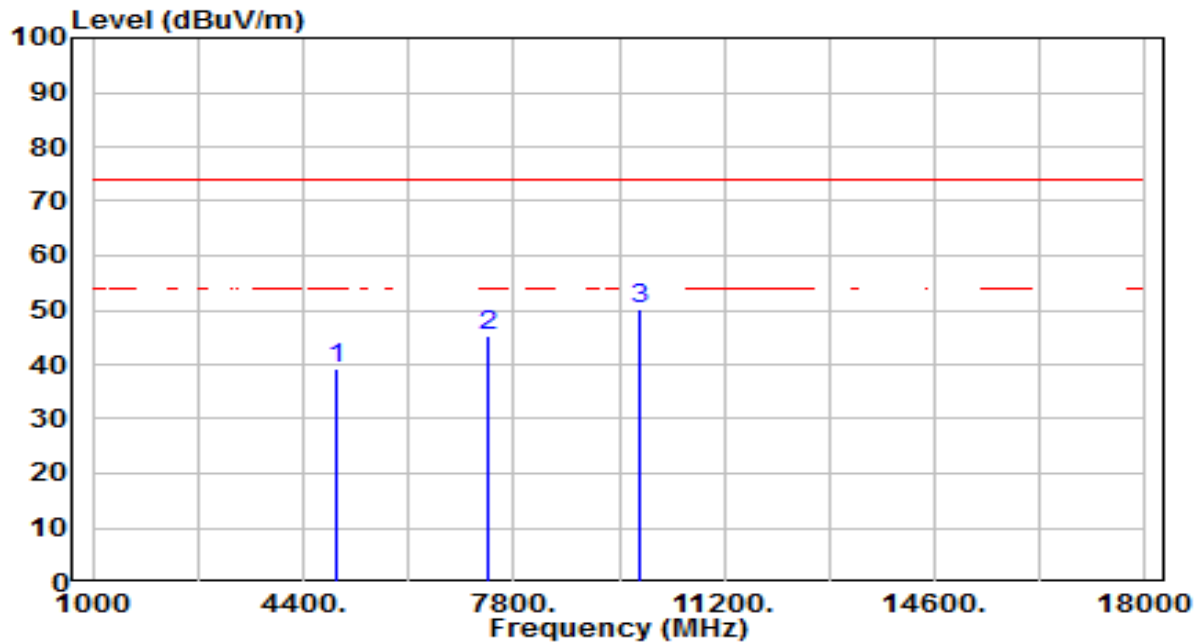


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.30	3.92	39.22	-34.78	74.00	100	44	Peak
2	7386.000	32.94	12.21	45.15	-28.85	74.00	100	199	Peak
3	* 9848.000	34.07	16.14	50.21	-23.79	74.00	100	249	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

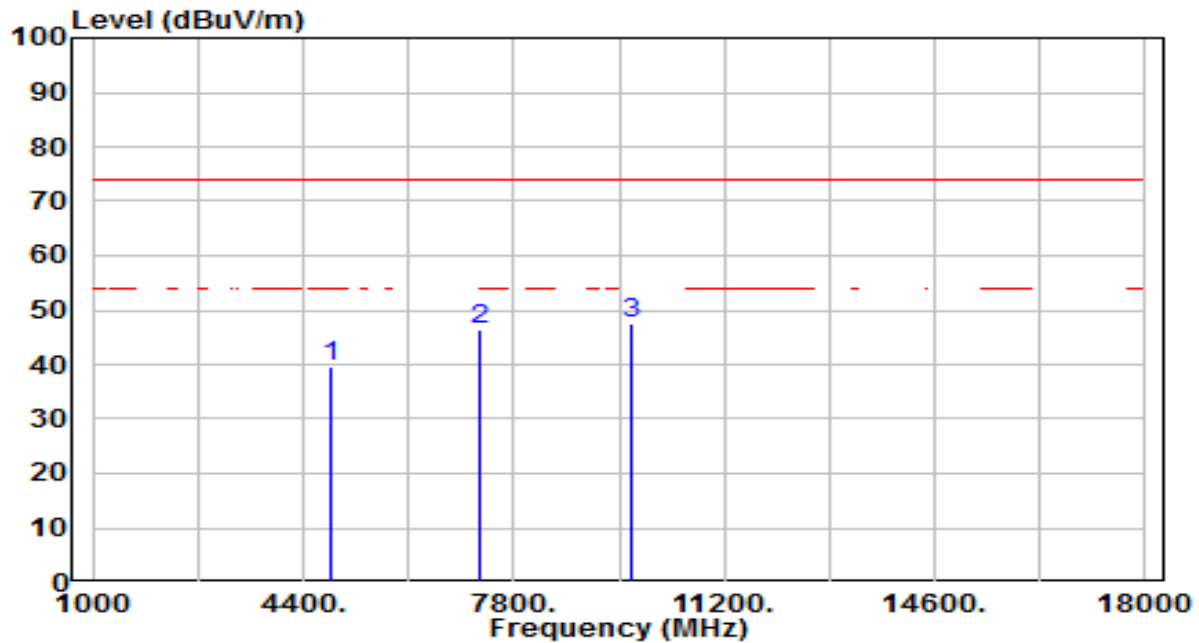


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.85	3.78	39.64	-34.36	74.00	100	0	Peak
2	7266.000	34.82	11.78	46.60	-27.40	74.00	100	43	Peak
3	* 9688.000	31.87	15.84	47.71	-26.29	74.00	100	212	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

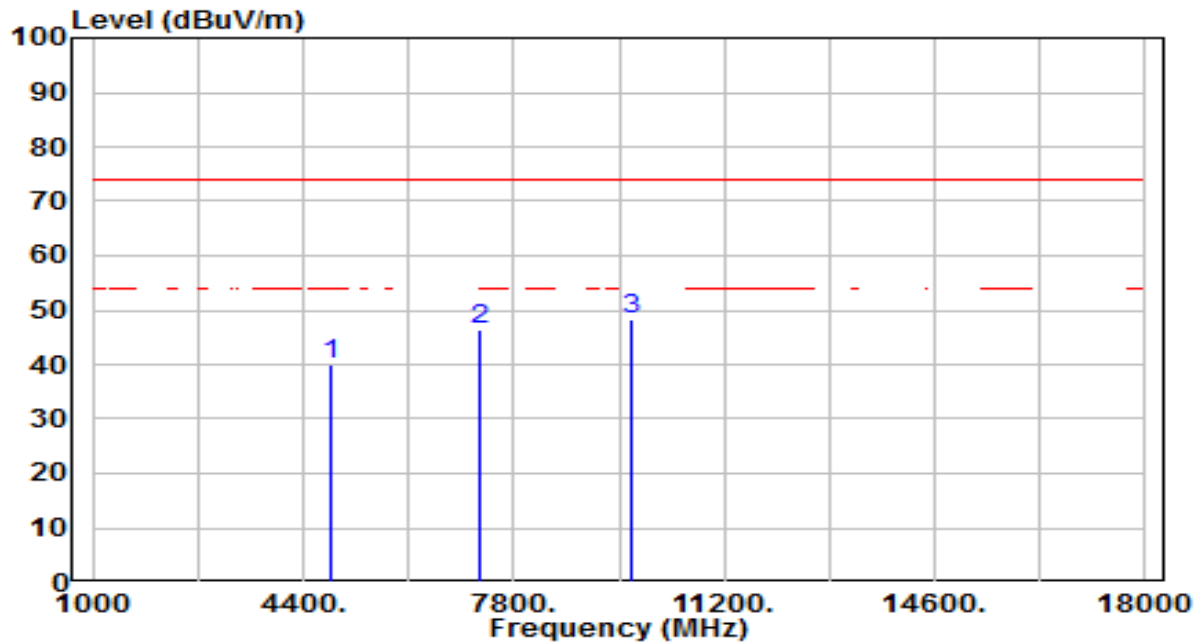


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	36.05	3.78	39.84	-34.16	74.00	100	294	Peak
2	7266.000	34.74	11.78	46.52	-27.48	74.00	100	319	Peak
3	* 9688.000	32.52	15.84	48.36	-25.64	74.00	100	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

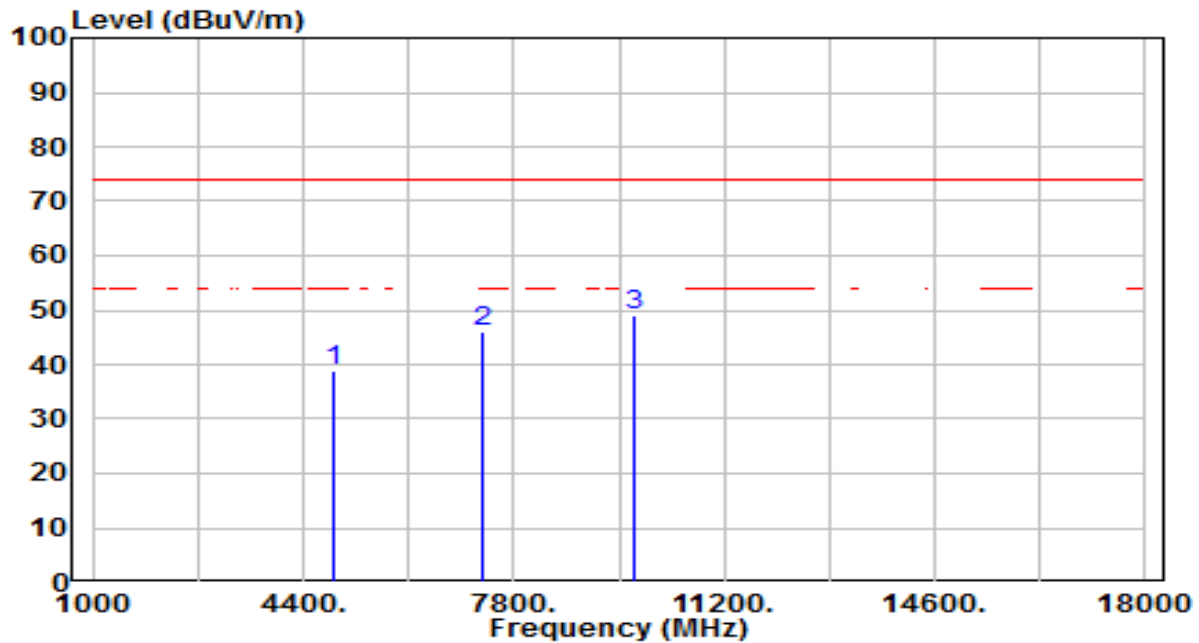


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.12	3.84	38.96	-35.04	74.00	100	120	Peak
2	7311.000	34.07	11.94	46.01	-27.99	74.00	100	50	Peak
3	* 9748.000	32.96	15.95	48.92	-25.08	74.00	100	226	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

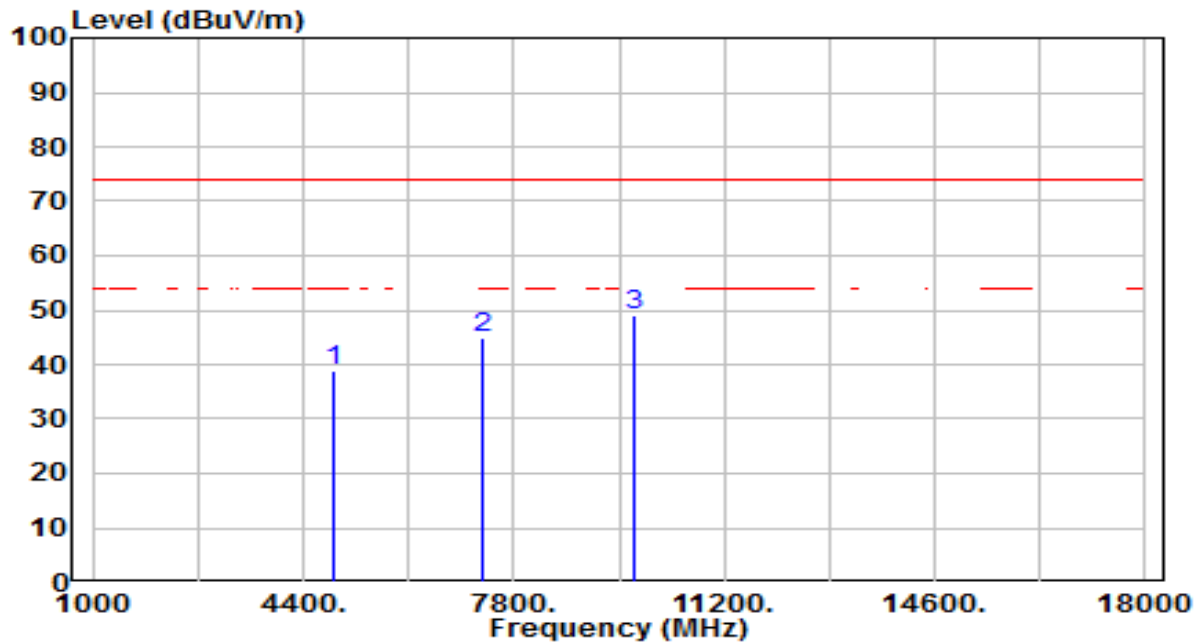


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.19	3.84	39.02	-34.98	74.00	100	230	Peak
2	7311.000	33.11	11.94	45.05	-28.95	74.00	100	105	Peak
3	* 9748.000	33.23	15.95	49.19	-24.81	74.00	100	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

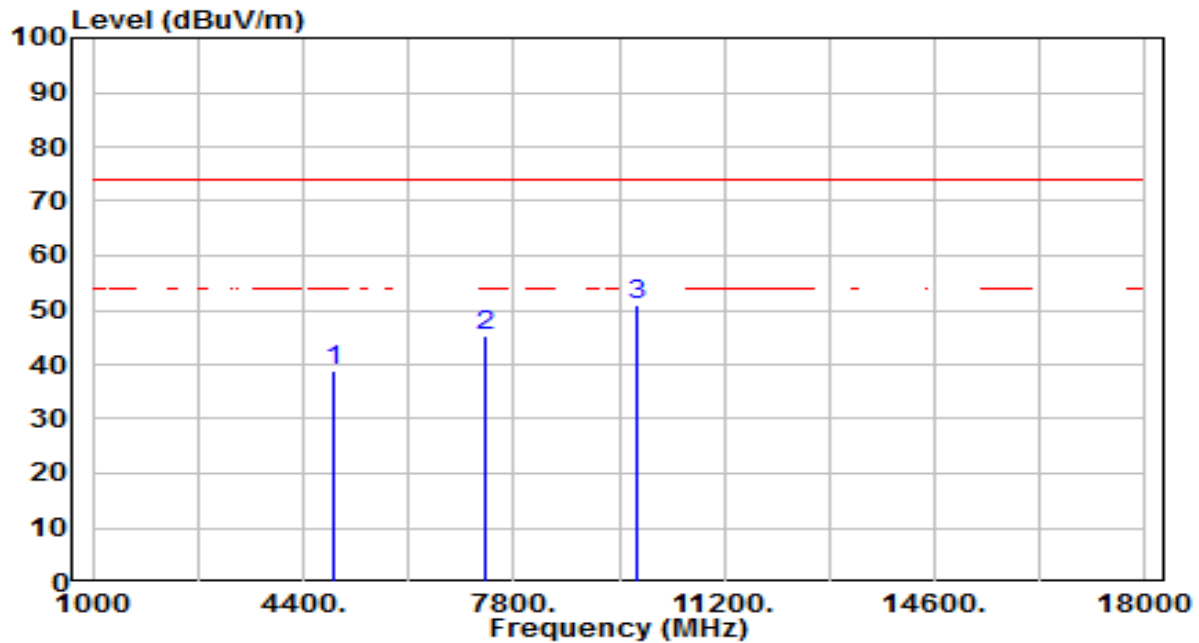


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.97	3.89	38.86	-35.14	74.00	100	37	Peak
2	7356.000	33.02	12.10	45.12	-28.88	74.00	100	126	Peak
3	* 9808.000	34.98	16.06	51.04	-22.96	74.00	100	30	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

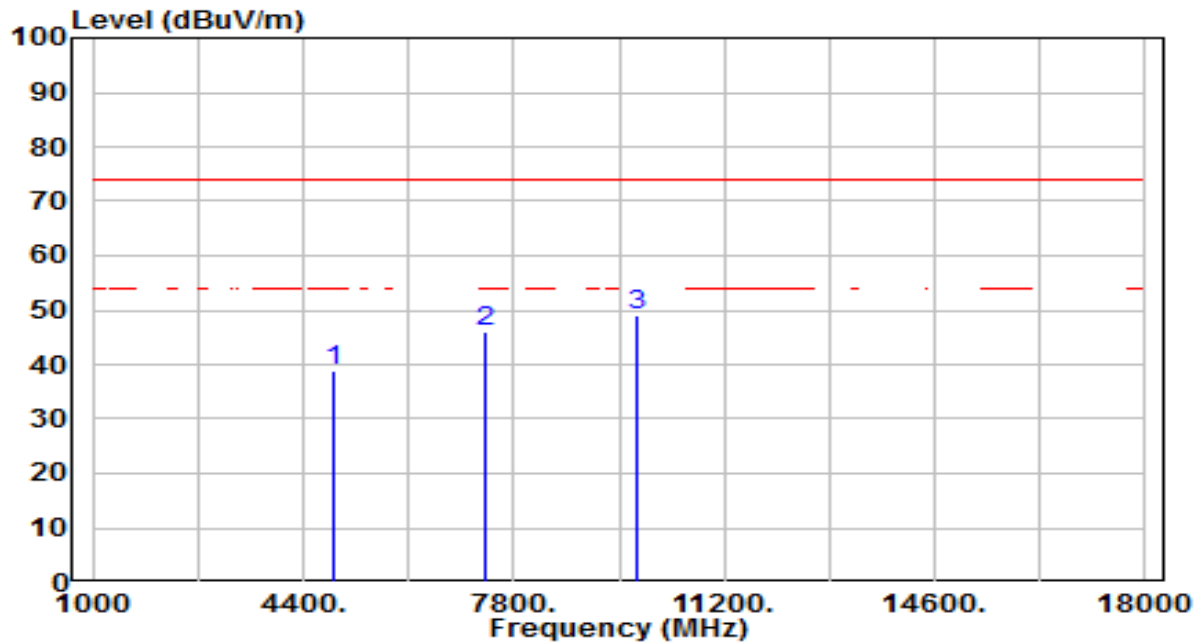


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	35.11	3.89	39.00	-35.00	74.00	100	193	Peak
2		7356.000	33.75	12.10	45.85	-28.15	74.00	100	232	Peak
3	*	9808.000	32.95	16.06	49.01	-24.99	74.00	100	246	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

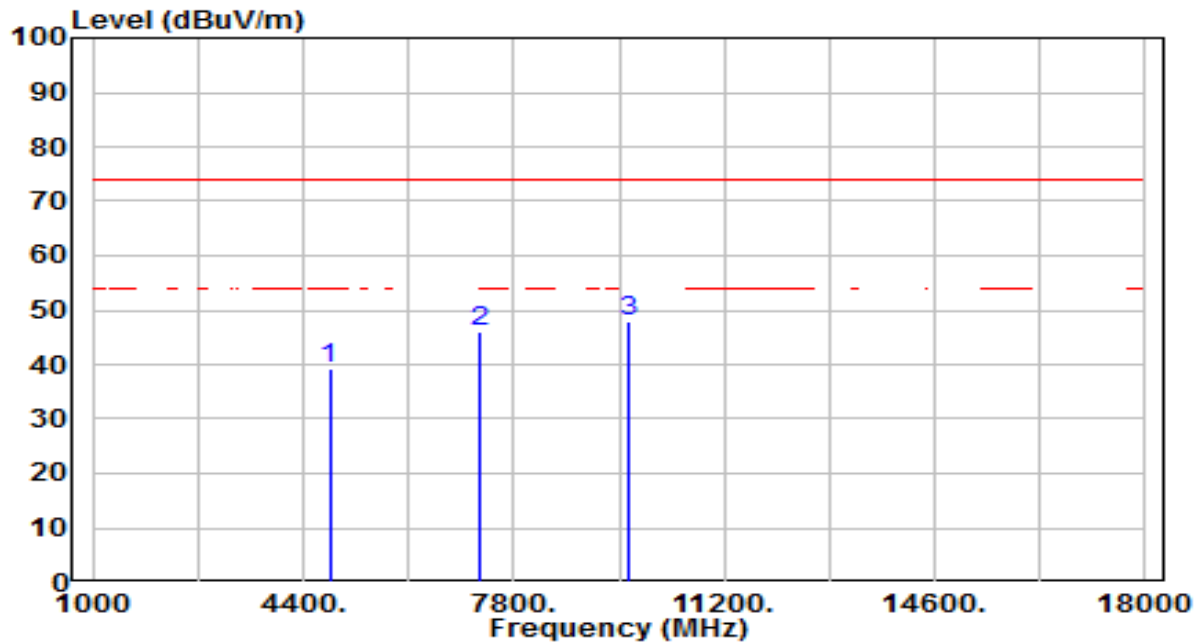


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.56	3.75	39.30	-34.70	74.00	100	304	Peak
2	7236.000	34.38	11.68	46.05	-27.95	74.00	100	104	Peak
3	* 9648.000	32.14	15.77	47.91	-26.09	74.00	100	58	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

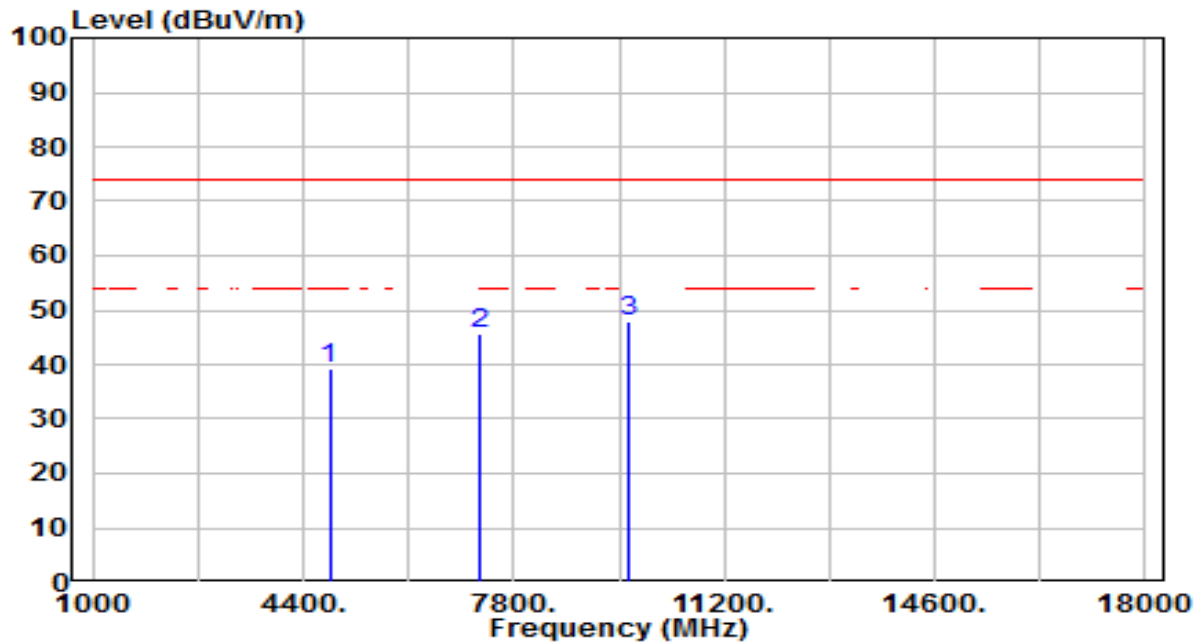


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.60	3.75	39.35	-34.65	74.00	100	232	Peak
2	7236.000	34.17	11.68	45.85	-28.15	74.00	100	141	Peak
3	* 9648.000	32.27	15.77	48.04	-25.96	74.00	100	26	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

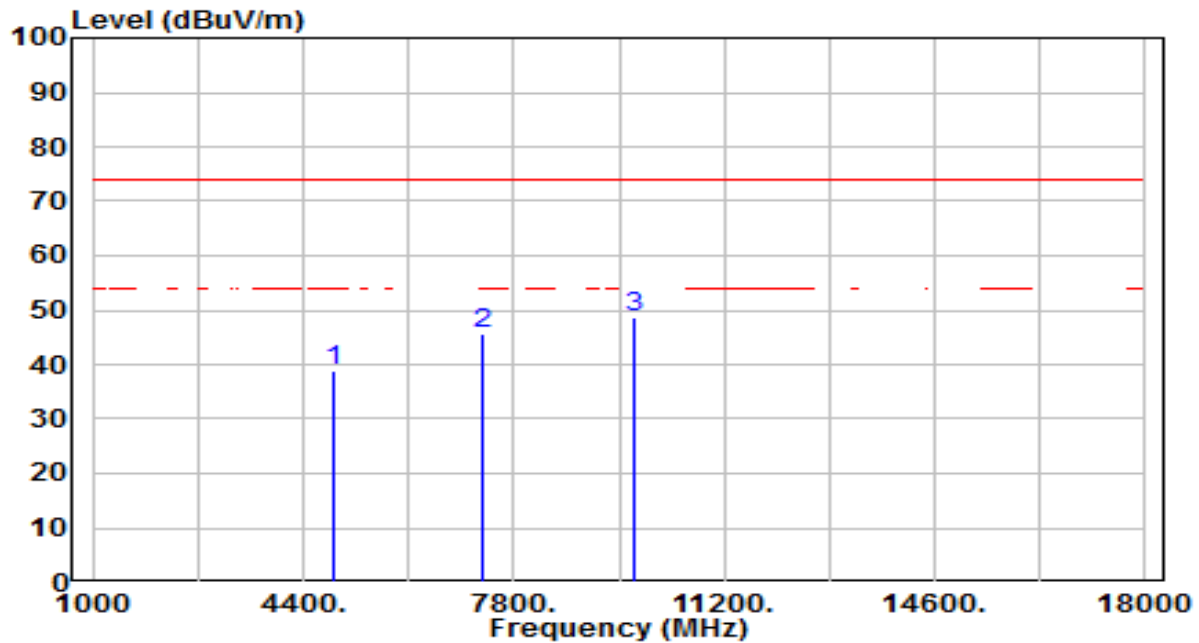


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.07	3.84	38.91	-35.09	74.00	100	293	Peak
2	7311.000	33.71	11.94	45.65	-28.35	74.00	100	63	Peak
3	* 9748.000	32.62	15.95	48.57	-25.43	74.00	100	183	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

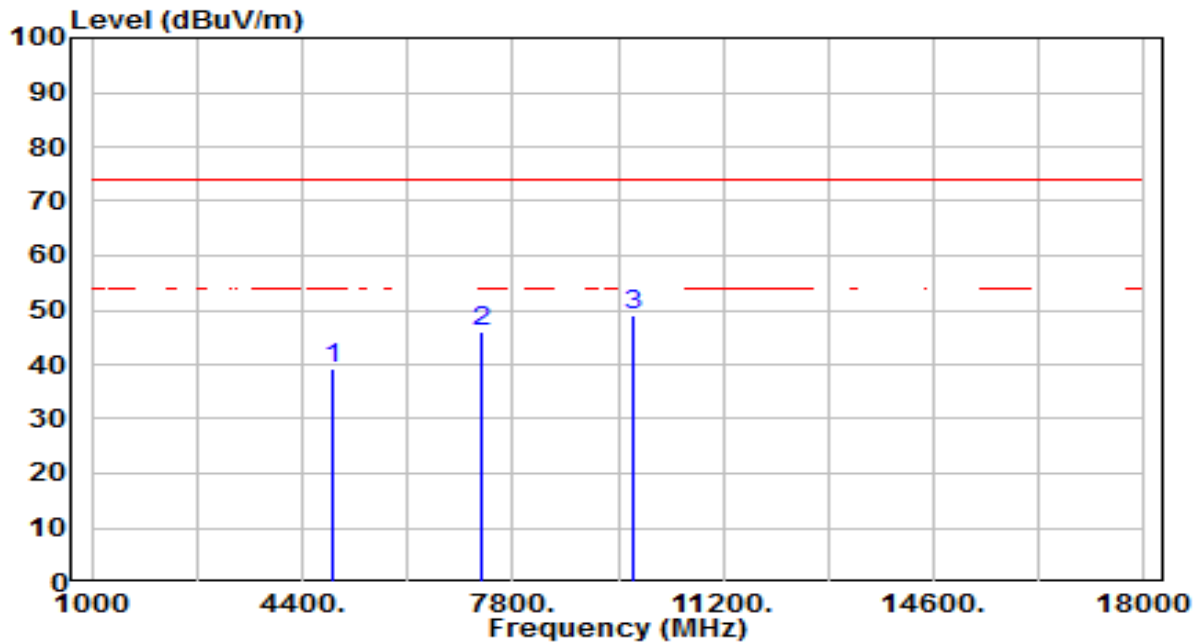


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.30	3.84	39.14	-34.86	74.00	100	327	Peak
2	7311.000	34.23	11.94	46.17	-27.83	74.00	100	26	Peak
3	* 9748.000	33.14	15.95	49.09	-24.91	74.00	100	203	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

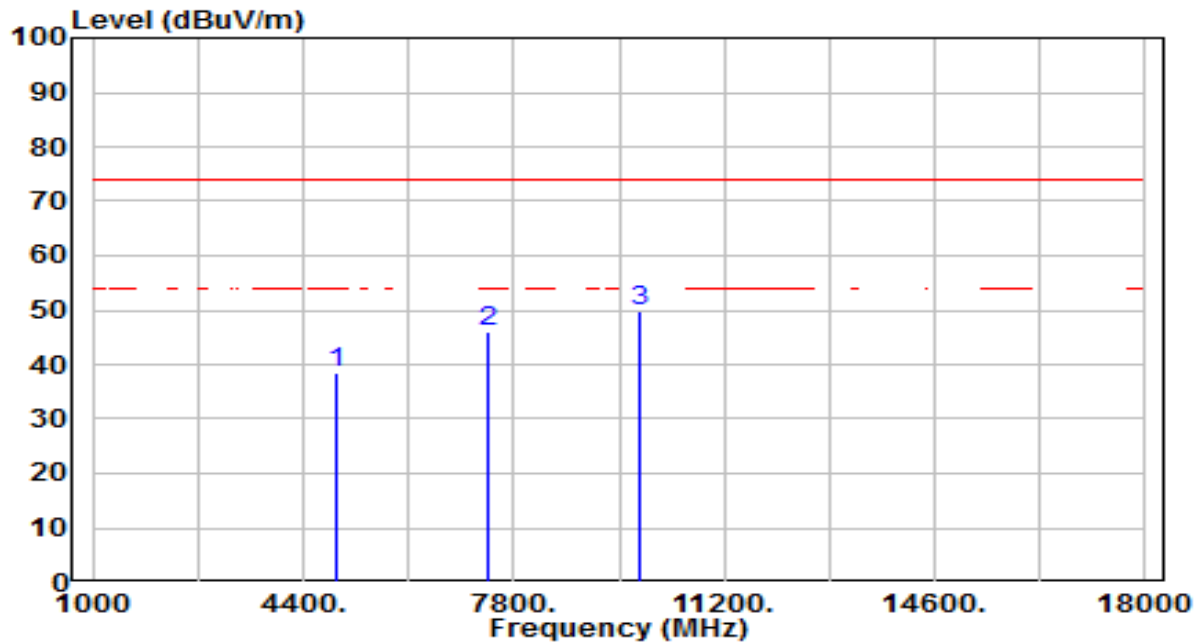


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.74	3.92	38.67	-35.33	74.00	100	4	Peak
2	7386.000	33.83	12.21	46.04	-27.96	74.00	100	283	Peak
3	* 9848.000	33.86	16.14	49.99	-24.01	74.00	100	157	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

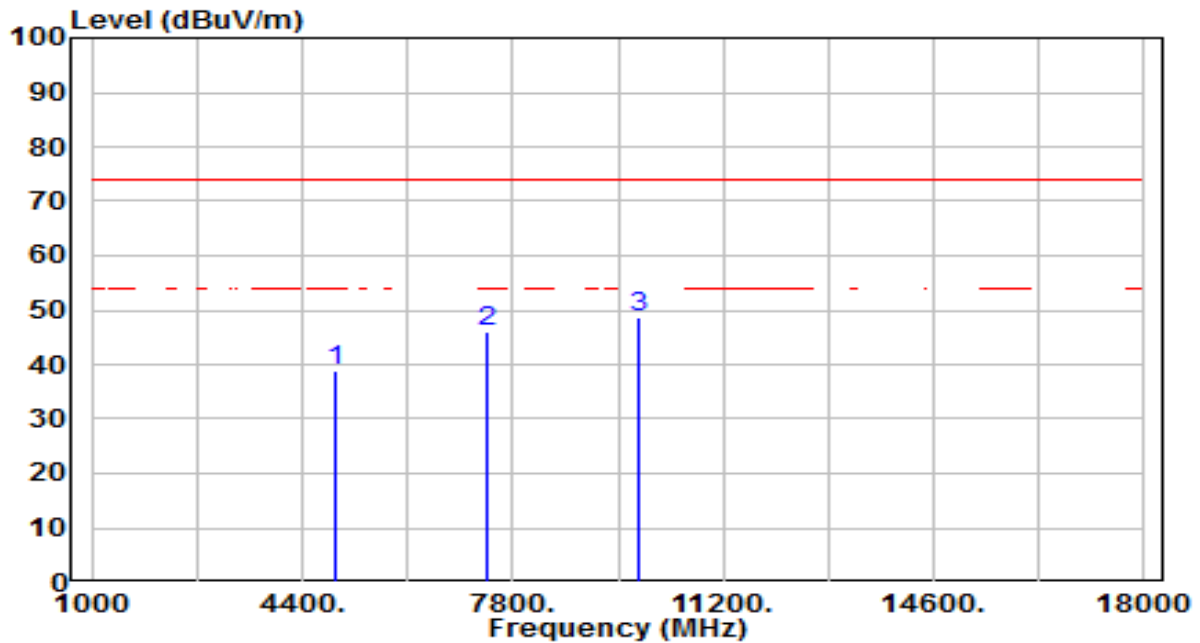


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	34.93	3.92	38.85	-35.15	74.00	100	23	Peak
2		7386.000	33.92	12.21	46.13	-27.87	74.00	100	336	Peak
3	*	9848.000	32.56	16.14	48.70	-25.30	74.00	100	237	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

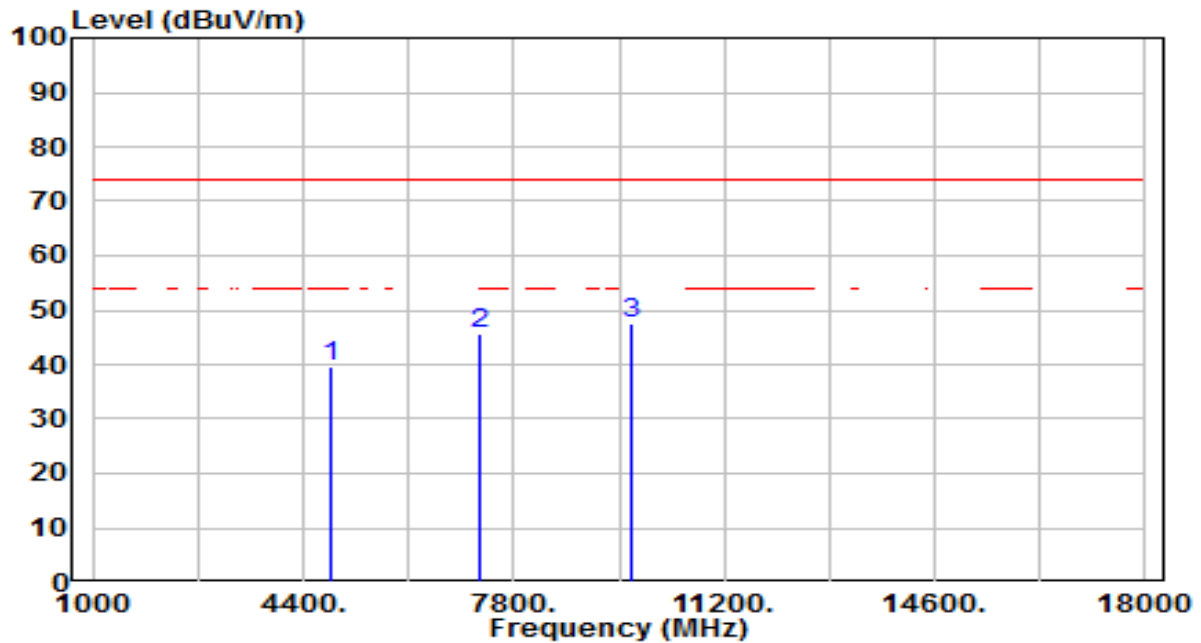


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.97	3.78	39.76	-34.24	74.00	100	24	Peak
2	7266.000	34.02	11.78	45.80	-28.20	74.00	100	351	Peak
3	* 9688.000	31.76	15.84	47.60	-26.40	74.00	100	38	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

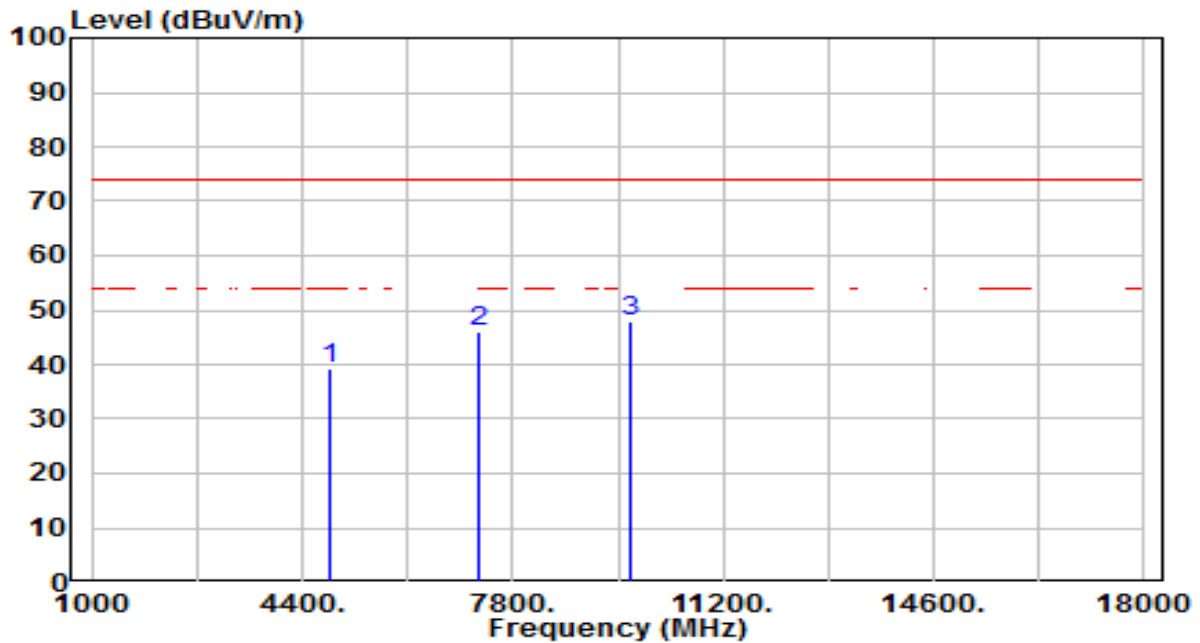


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.56	3.78	39.34	-34.66	74.00	100	230	Peak
2	7266.000	34.26	11.78	46.04	-27.96	74.00	100	212	Peak
3	* 9688.000	31.94	15.84	47.78	-26.22	74.00	100	19	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

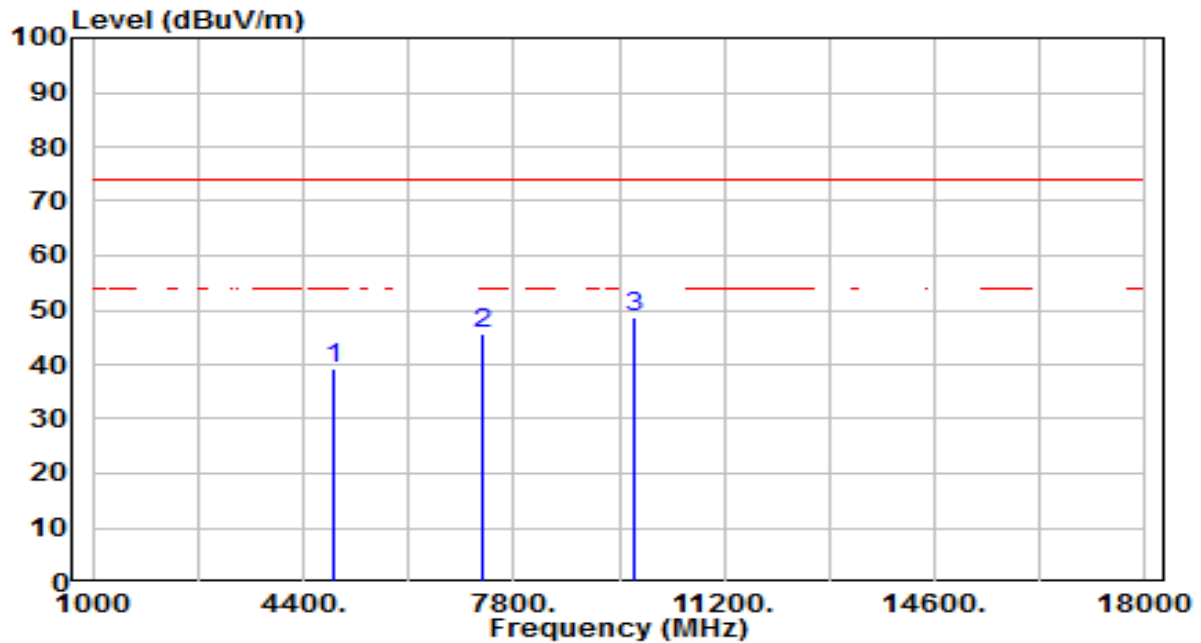


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.35	3.84	39.19	-34.81	74.00	100	145	Peak
2	7311.000	33.88	11.94	45.82	-28.18	74.00	100	152	Peak
3	* 9748.000	32.63	15.95	48.59	-25.41	74.00	100	279	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

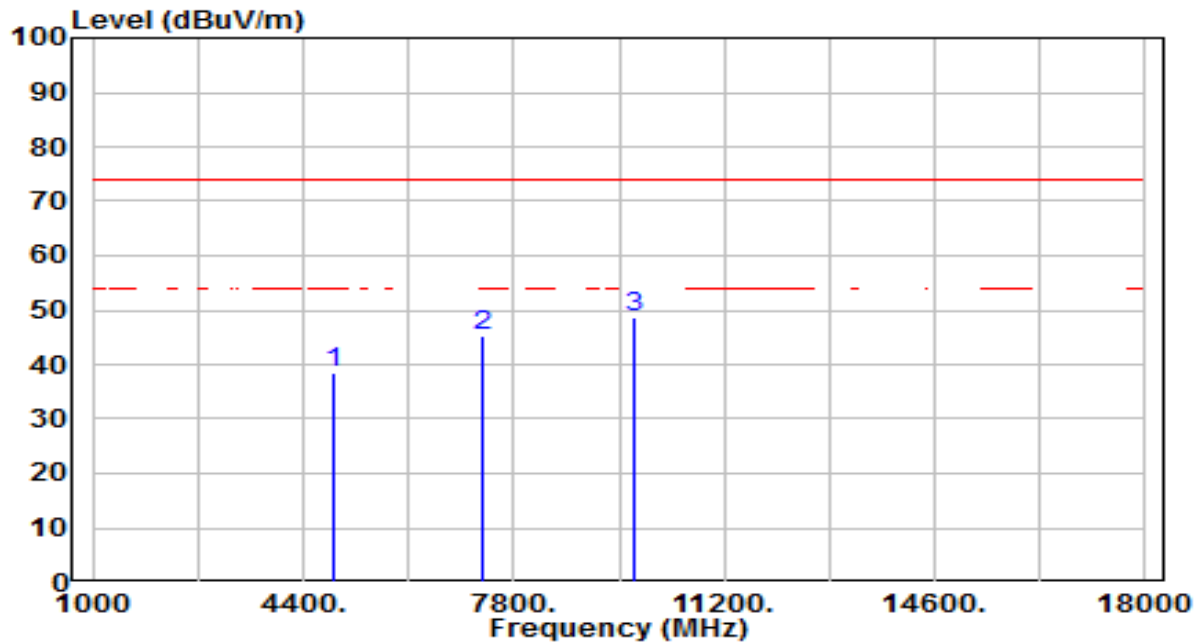


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.75	3.84	38.58	-35.42	74.00	100	263	Peak
2	7311.000	33.44	11.94	45.38	-28.62	74.00	100	10	Peak
3	* 9748.000	32.81	15.95	48.76	-25.24	74.00	100	259	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

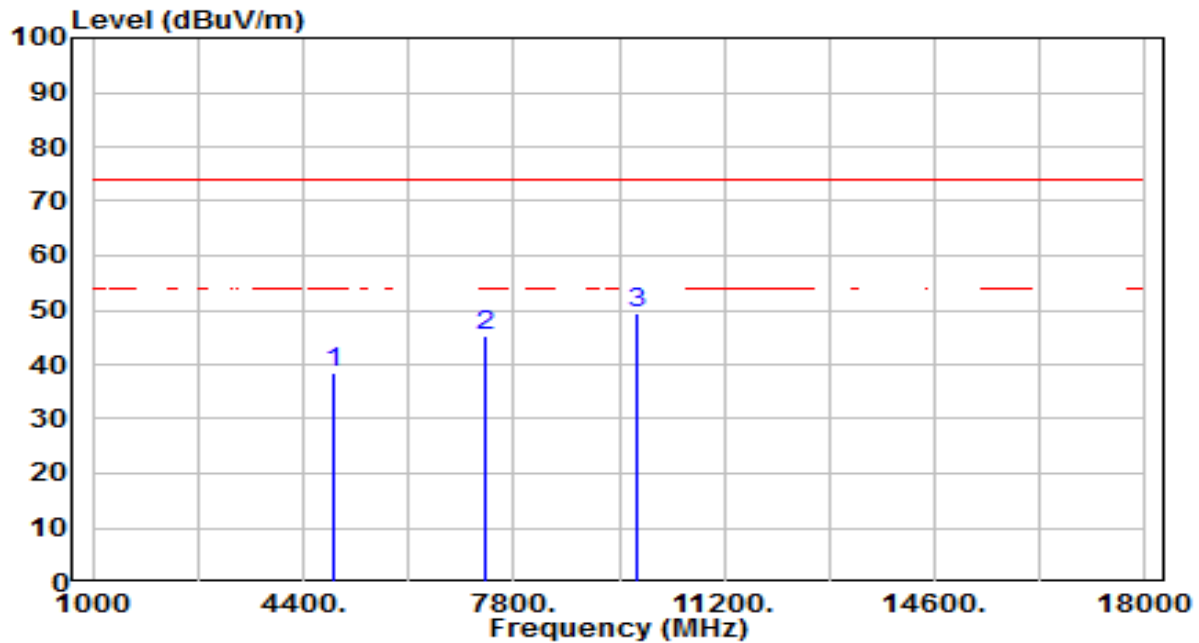


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.46	3.89	38.35	-35.65	74.00	100	290	Peak
2	7356.000	33.05	12.10	45.15	-28.85	74.00	100	276	Peak
3	* 9808.000	33.35	16.06	49.41	-24.59	74.00	100	3	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

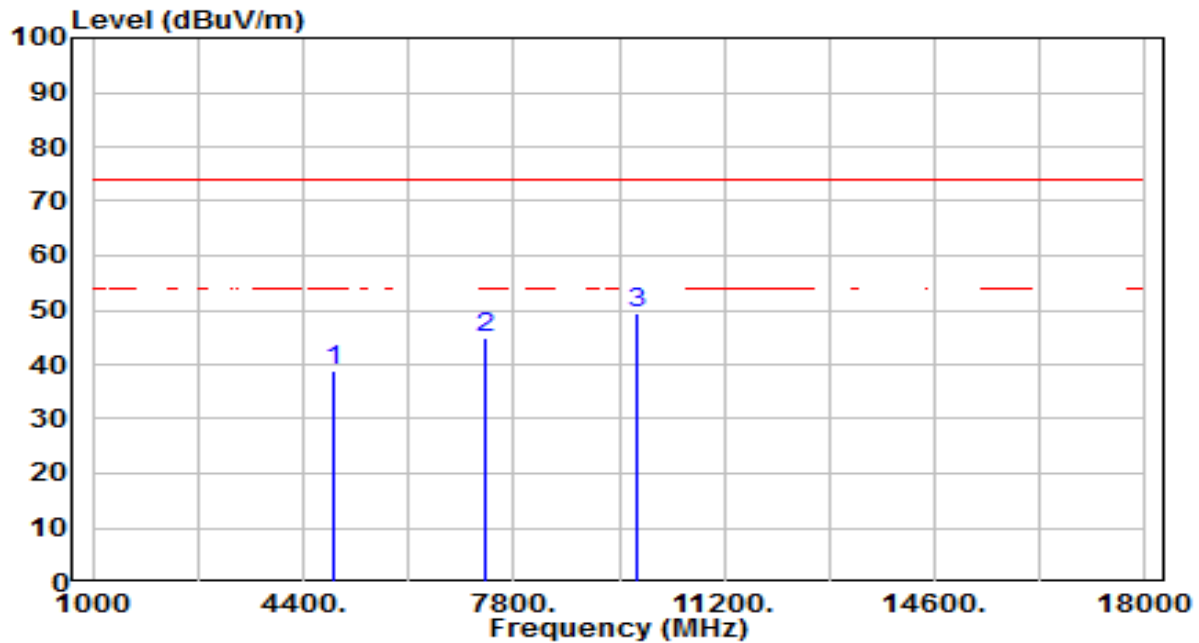


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	34.96	3.89	38.85	-35.15	74.00	100	260	Peak
2		7356.000	32.64	12.10	44.74	-29.26	74.00	100	138	Peak
3	*	9808.000	33.36	16.06	49.43	-24.57	74.00	100	179	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

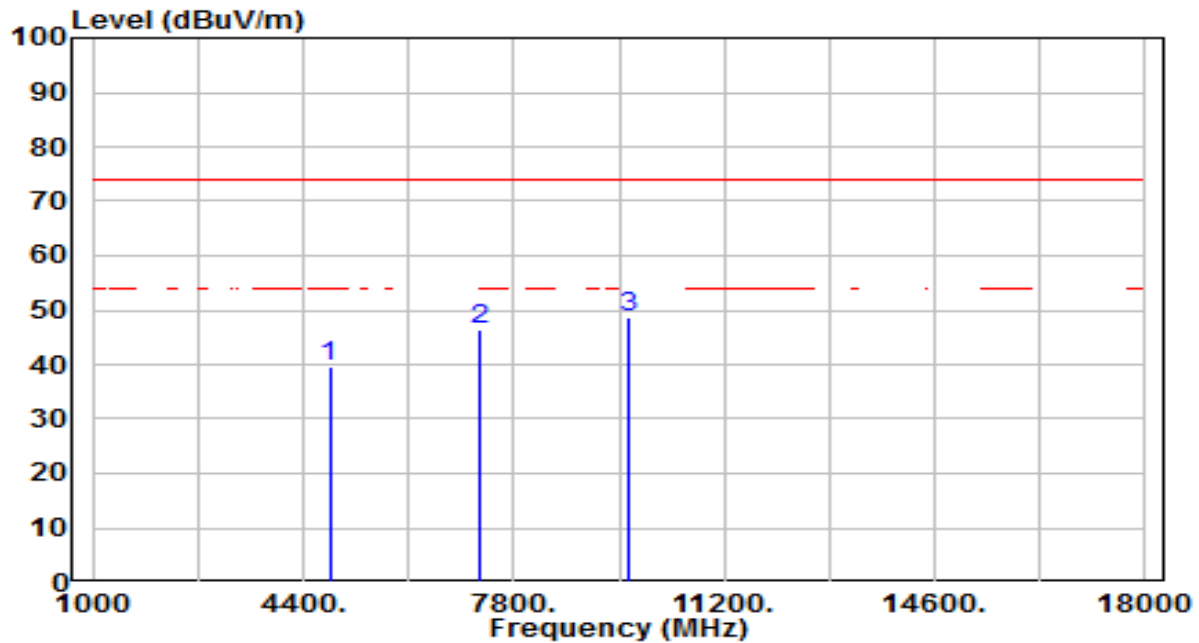


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.69	3.75	39.44	-34.56	74.00	100	82	Peak
2	7236.000	34.56	11.68	46.23	-27.77	74.00	100	100	Peak
3	* 9648.000	32.77	15.77	48.54	-25.46	74.00	100	283	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

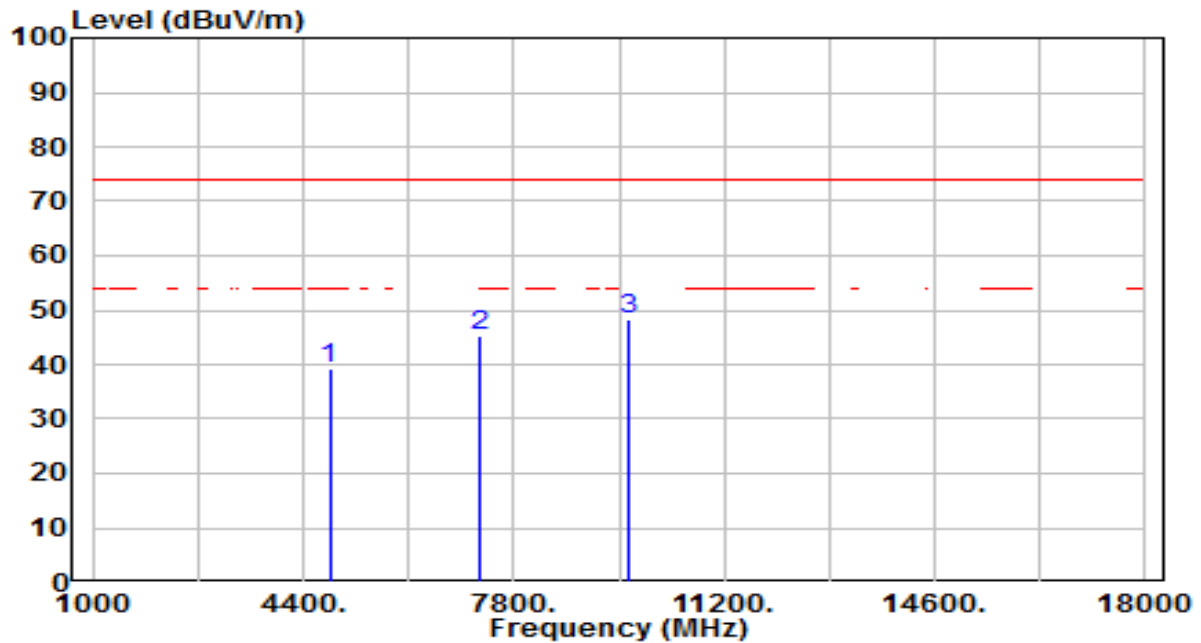


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.37	3.75	39.11	-34.89	74.00	100	94	Peak
2	7236.000	33.59	11.68	45.26	-28.74	74.00	100	300	Peak
3	* 9648.000	32.43	15.77	48.20	-25.80	74.00	100	104	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

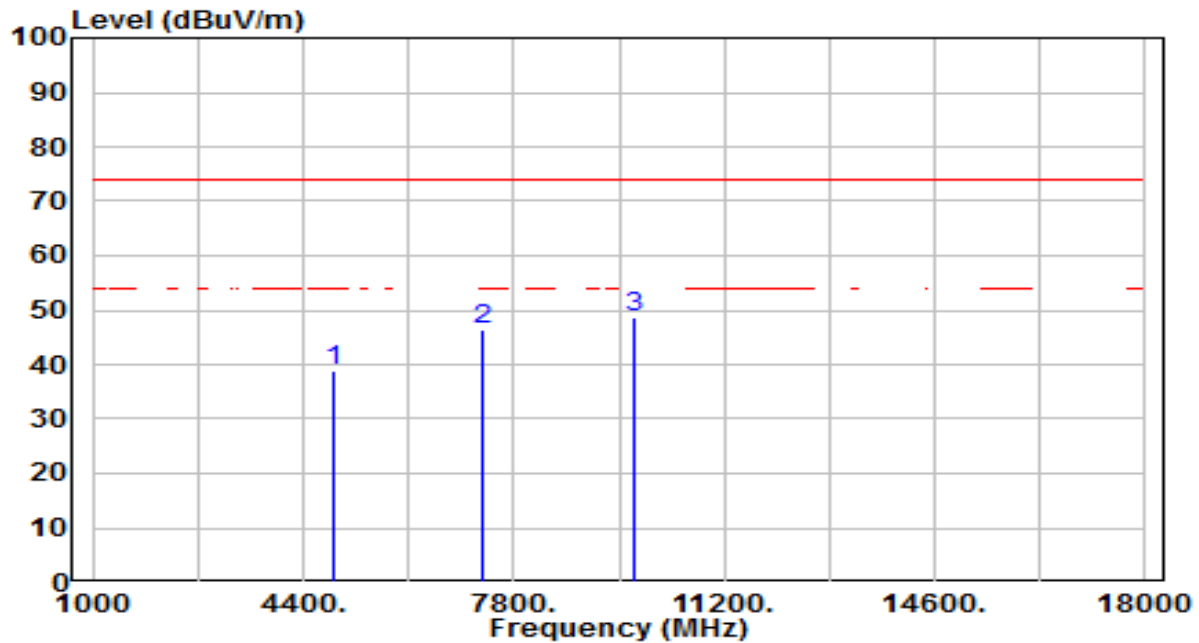


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.90	3.84	38.74	-35.26	74.00	100	39	Peak
2	7311.000	34.30	11.94	46.24	-27.76	74.00	100	209	Peak
3	* 9748.000	32.89	15.95	48.84	-25.16	74.00	100	322	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

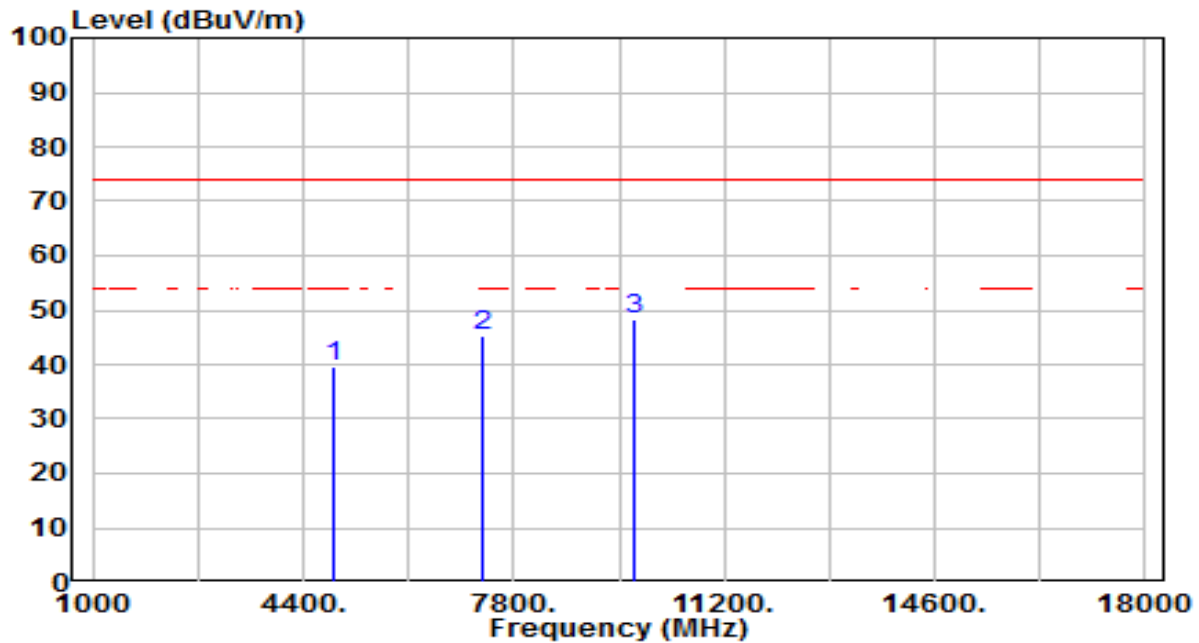


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.74	3.84	39.58	-34.42	74.00	100	38	Peak
2	7311.000	33.17	11.94	45.11	-28.89	74.00	100	347	Peak
3	* 9748.000	32.42	15.95	48.38	-25.62	74.00	100	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

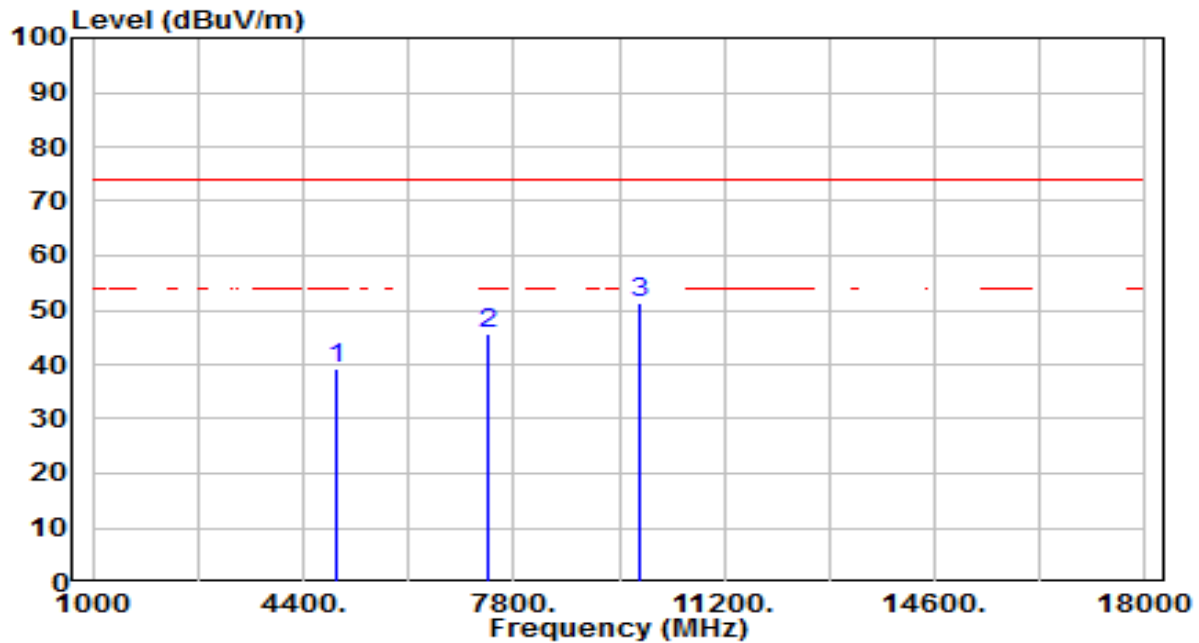


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.45	3.92	39.38	-34.62	74.00	100	155	Peak
2	7386.000	33.27	12.21	45.48	-28.52	74.00	100	297	Peak
3	* 9848.000	35.34	16.14	51.48	-22.52	74.00	100	86	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

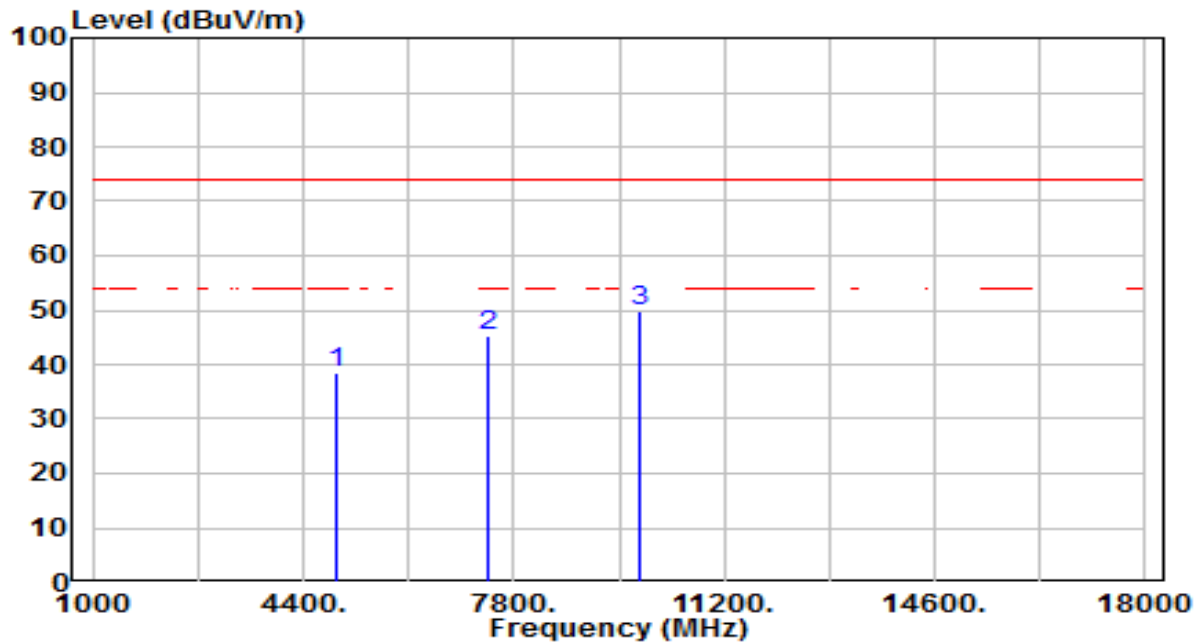


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.41	3.92	38.34	-35.66	74.00	100	296	Peak
2	7386.000	32.96	12.21	45.17	-28.83	74.00	100	43	Peak
3	* 9848.000	33.75	16.14	49.89	-24.11	74.00	100	314	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

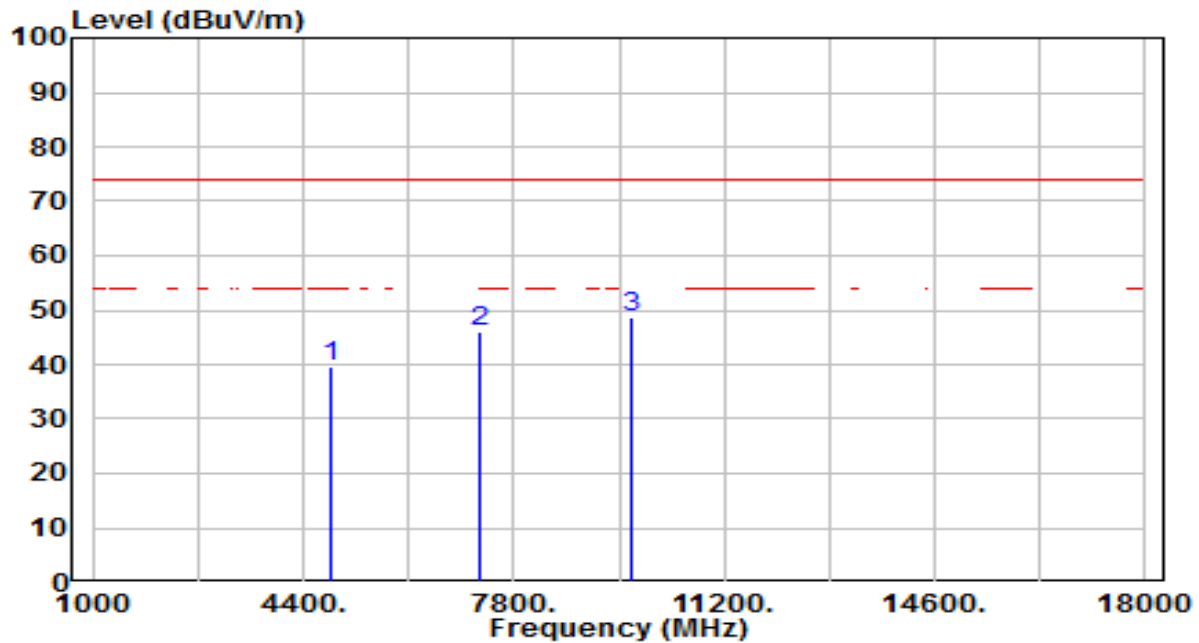


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.80	3.78	39.58	-34.42	74.00	100	219	Peak
2	7266.000	34.44	11.78	46.22	-27.78	74.00	100	290	Peak
3	* 9688.000	32.77	15.84	48.62	-25.38	74.00	100	279	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

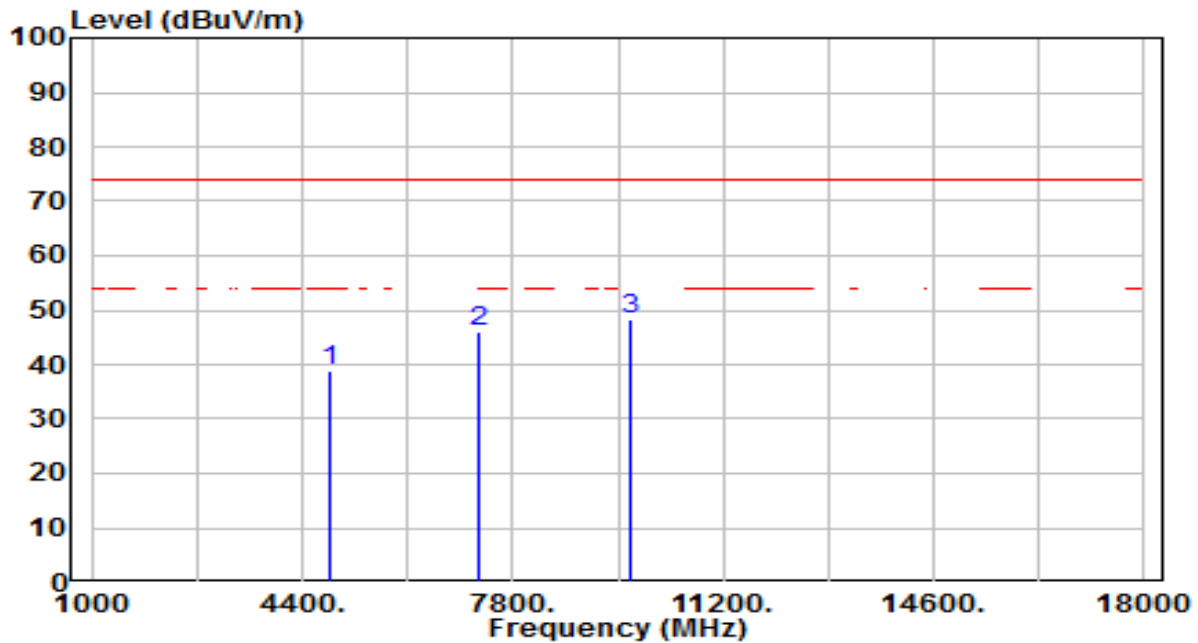


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.93	3.78	38.71	-35.29	74.00	100	89	Peak
2	7266.000	34.33	11.78	46.11	-27.89	74.00	100	194	Peak
3	* 9688.000	32.41	15.84	48.25	-25.75	74.00	100	276	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

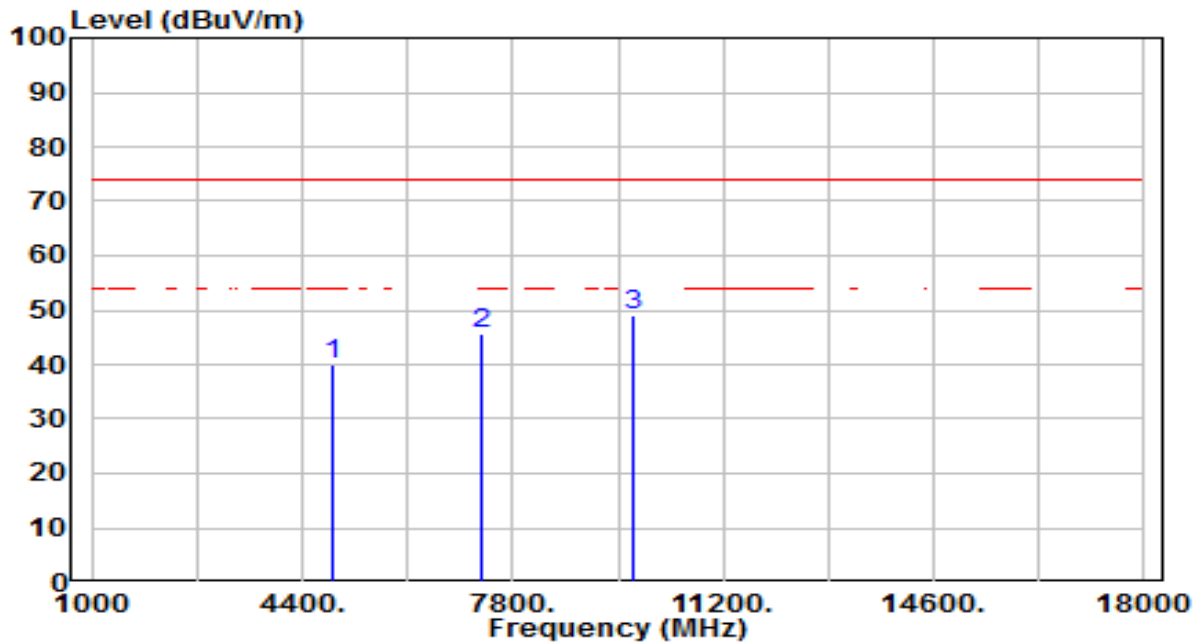


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.07	3.84	39.91	-34.09	74.00	100	117	Peak
2	7311.000	33.57	11.94	45.52	-28.48	74.00	100	251	Peak
3	* 9748.000	33.29	15.95	49.24	-24.76	74.00	100	286	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

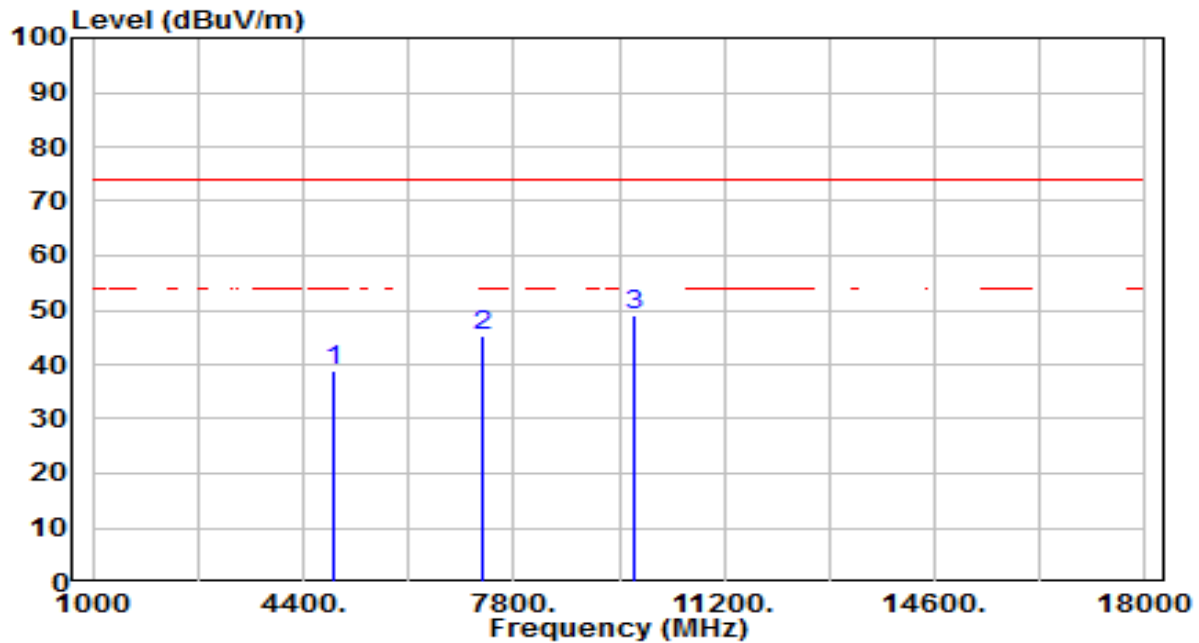


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.97	3.84	38.80	-35.20	74.00	100	224	Peak
2	7311.000	33.43	11.94	45.37	-28.63	74.00	100	260	Peak
3	* 9748.000	32.93	15.95	48.89	-25.11	74.00	100	235	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

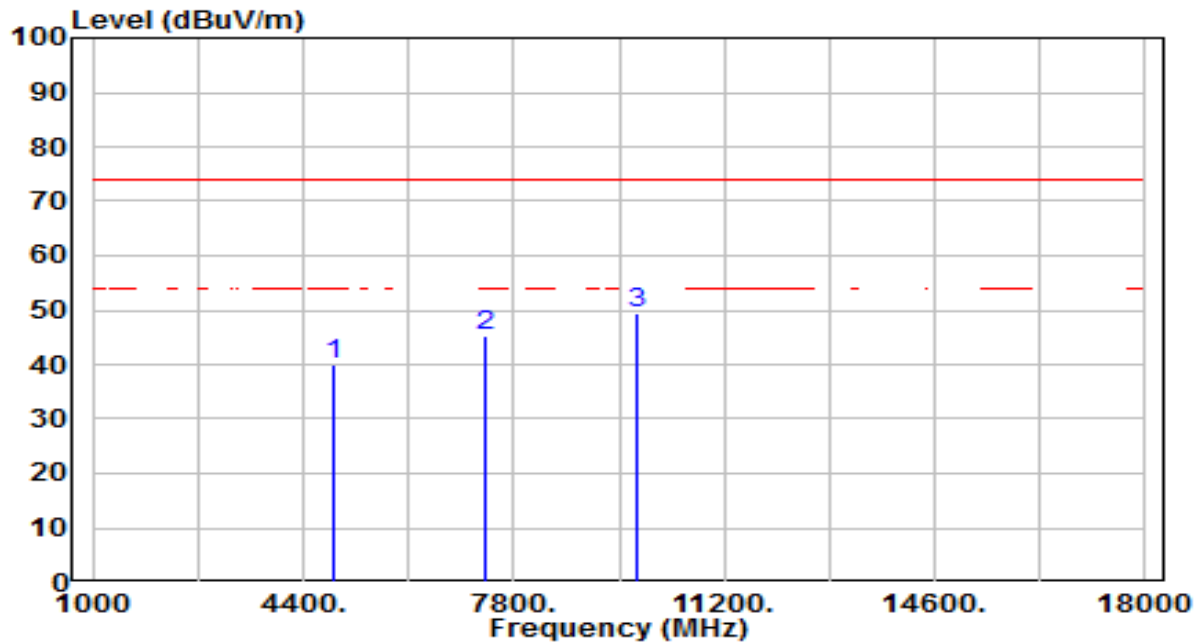


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	35.99	3.89	39.88	-34.12	74.00	100	322	Peak
2		7356.000	33.29	12.10	45.39	-28.61	74.00	100	251	Peak
3	*	9808.000	33.46	16.06	49.52	-24.48	74.00	100	293	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

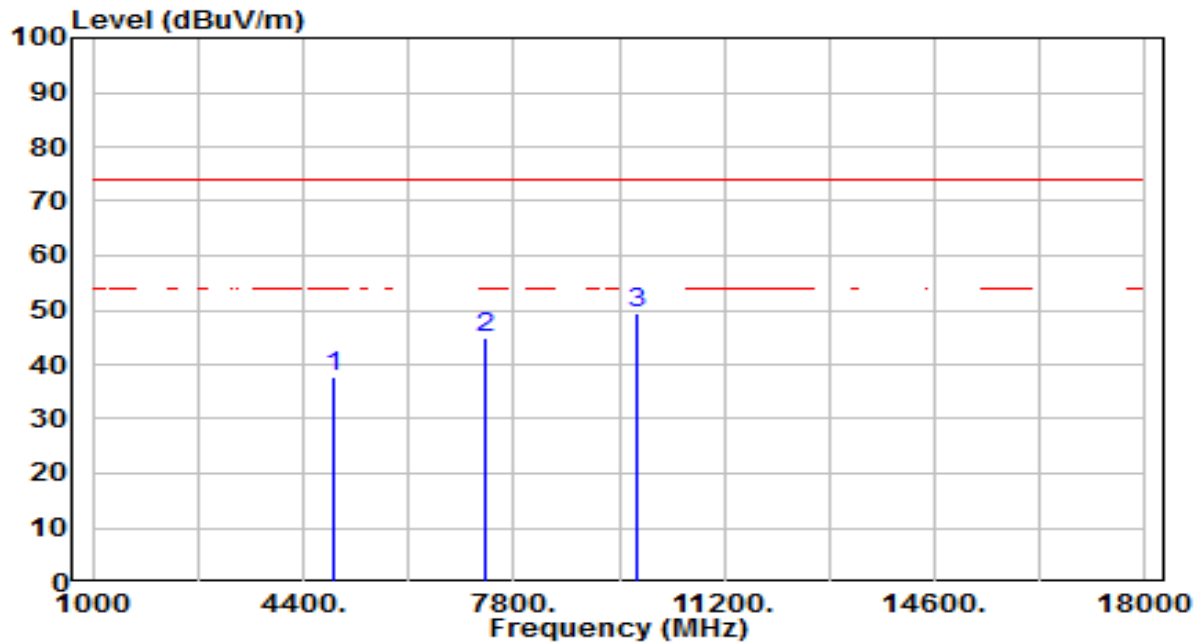


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.91	3.89	37.80	-36.20	74.00	100	355	Peak
2	7356.000	32.89	12.10	44.99	-29.01	74.00	100	9	Peak
3	* 9808.000	33.49	16.06	49.56	-24.44	74.00	100	241	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

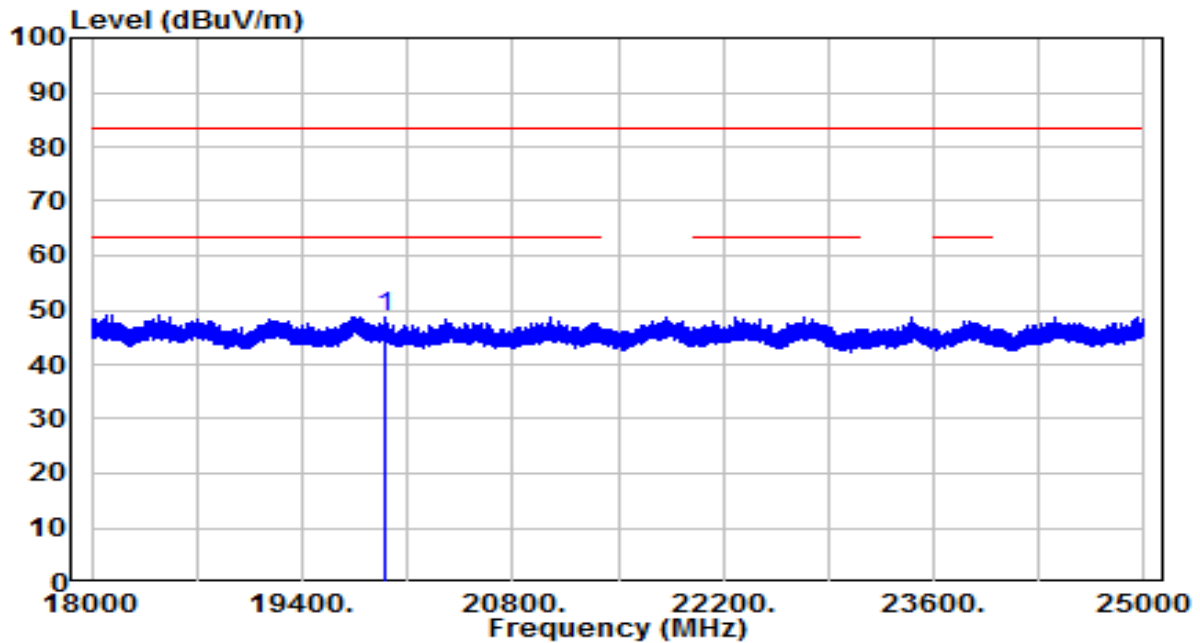


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	19959.560	37.79	10.96	48.75	-34.75	83.50	150	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

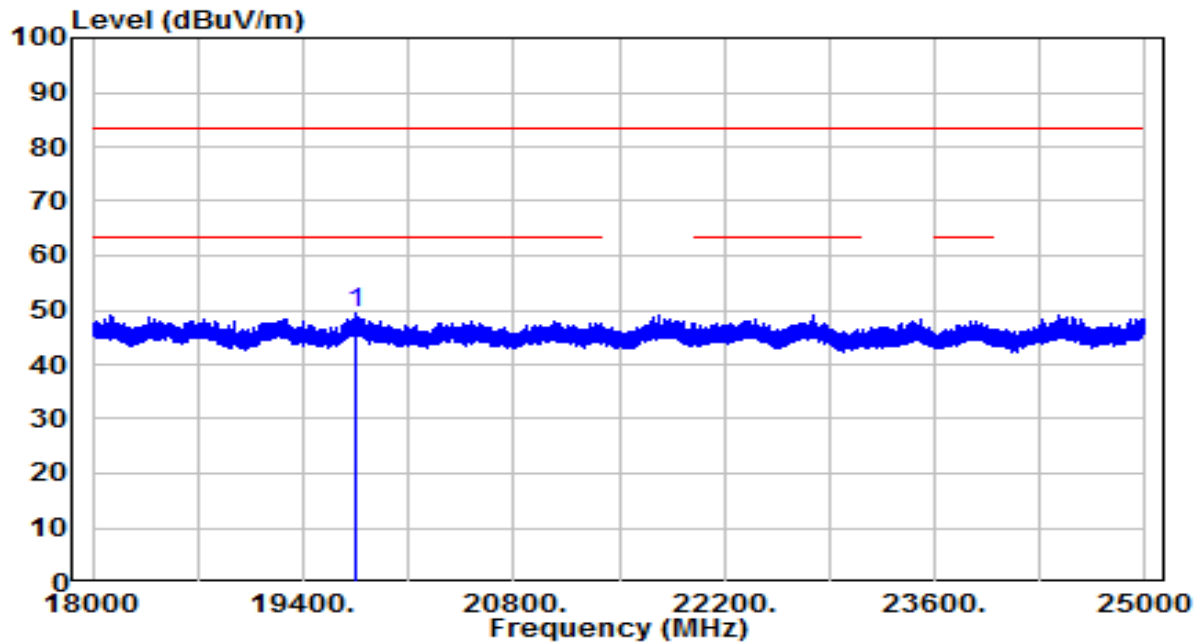

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	19757.440	38.37	10.95	49.31	-34.19	83.50	150	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

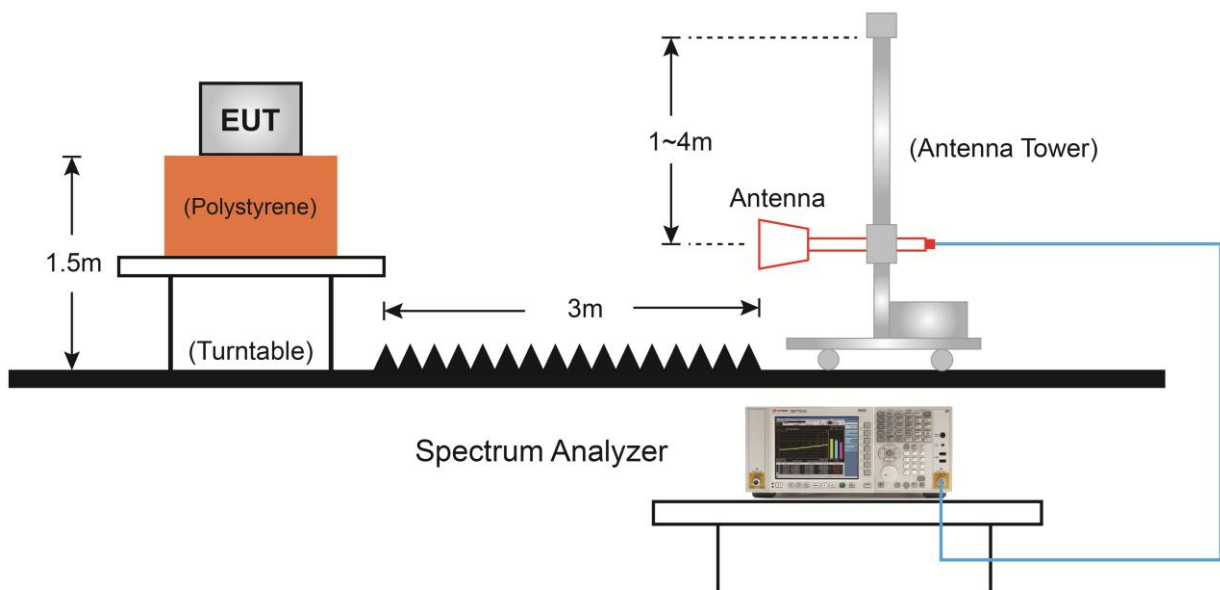7.7.4.Test Setup

7.7.5. Test Result

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

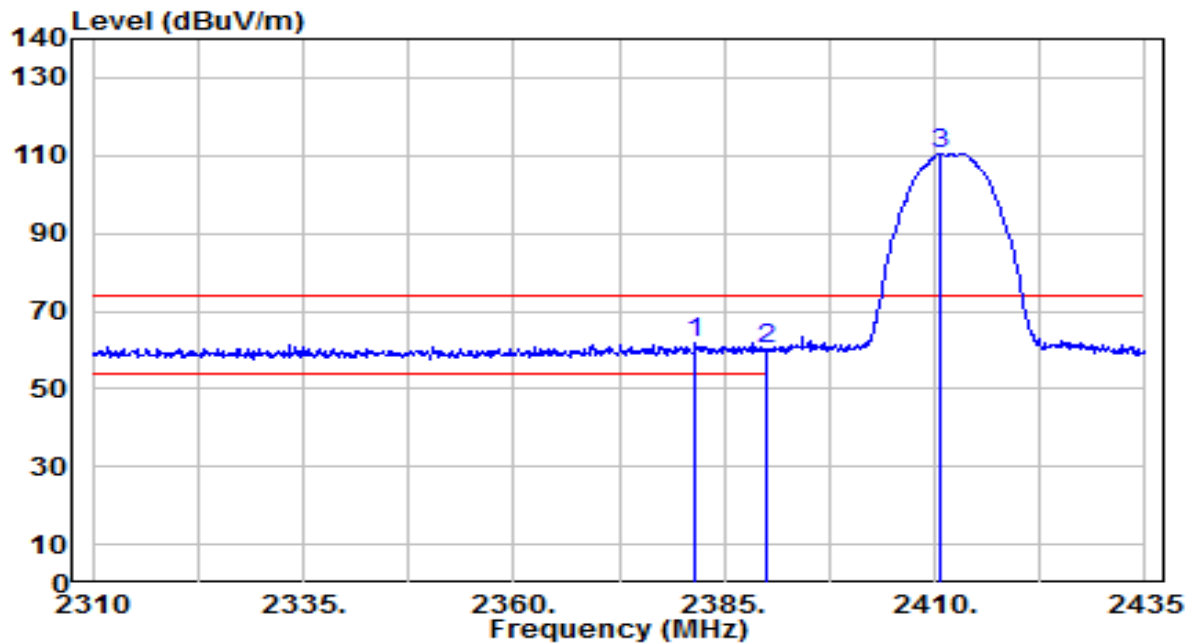


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.625	29.77	31.92	61.68	-12.32	74.00	205	270	Peak
2		2390.000	28.38	31.95	60.33	-13.67	74.00	205	270	Peak
3		2410.750	78.62	32.03	110.65	N/A	N/A	205	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

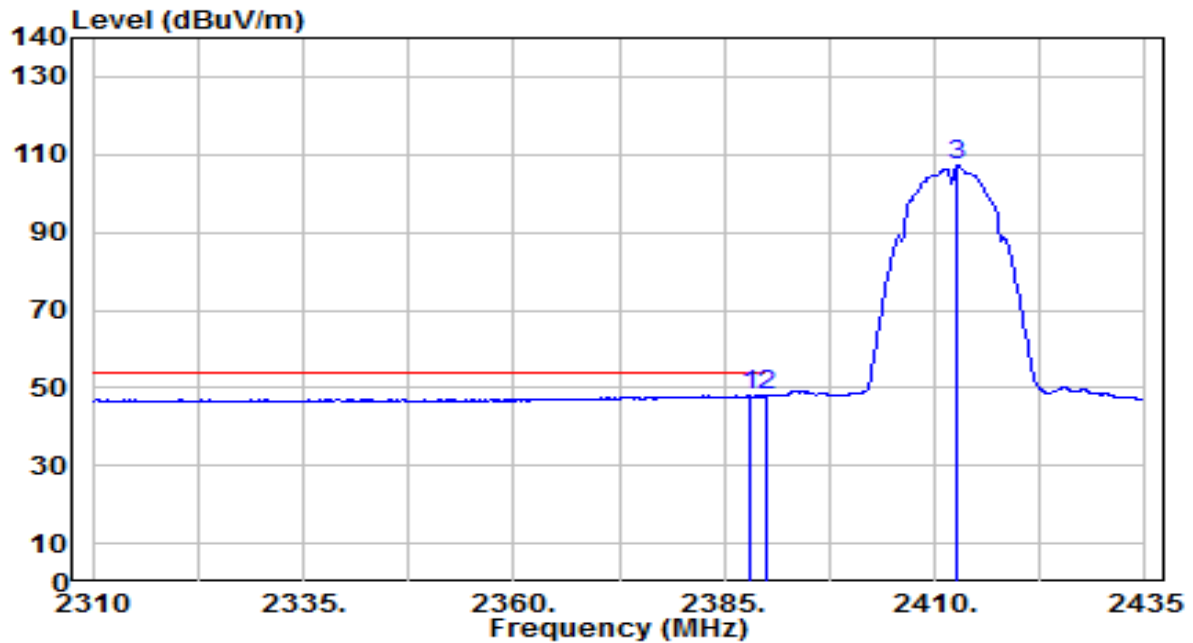


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	16.16	31.94	48.10	-5.90	54.00	205	270	Average
2		2390.000	15.98	31.95	47.93	-6.07	54.00	205	270	Average
3		2412.750	75.03	32.03	107.07	N/A	N/A	205	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

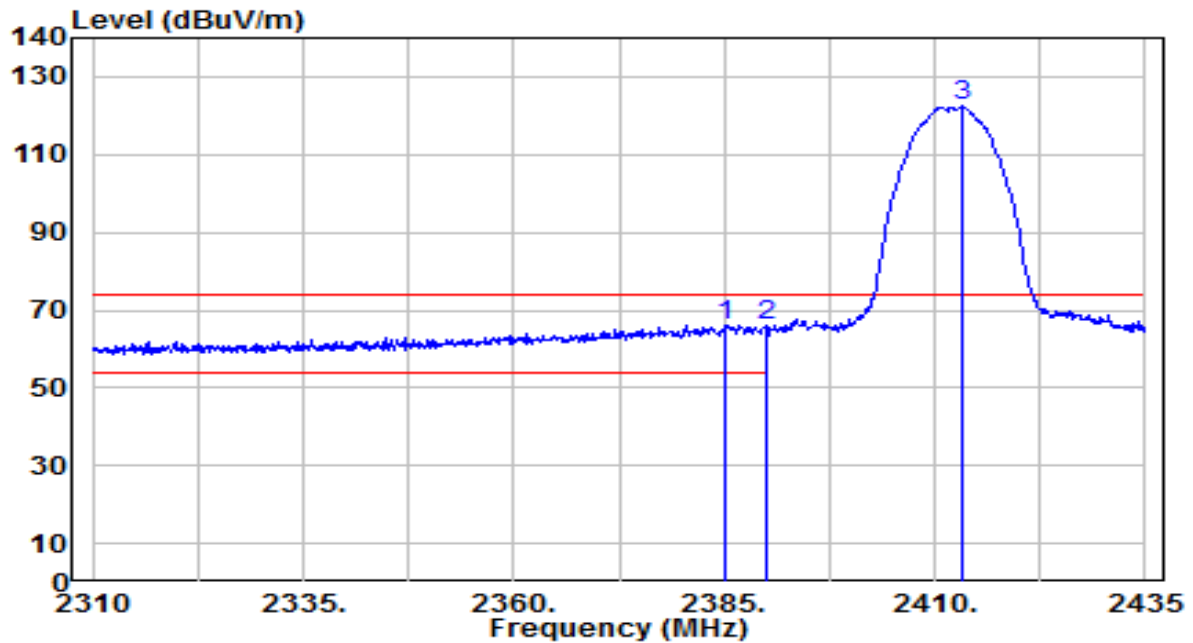


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.000	34.32	31.93	66.25	-7.75	74.00	180	345	Peak
2		2390.000	34.01	31.95	65.96	-8.04	74.00	180	345	Peak
3		2413.250	90.31	32.04	122.35	N/A	N/A	180	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

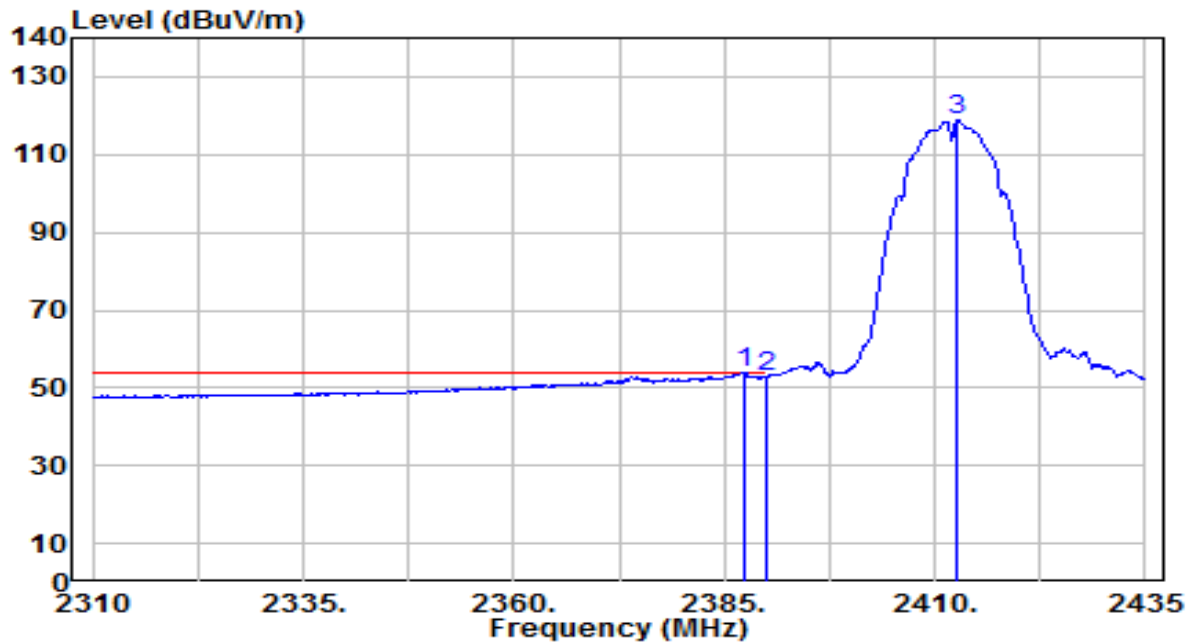


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.375	21.96	31.94	53.90	-0.10	54.00	180	345	Average
2		2390.000	21.04	31.95	52.99	-1.01	54.00	180	345	Average
3		2412.750	86.63	32.03	118.66	N/A	N/A	180	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

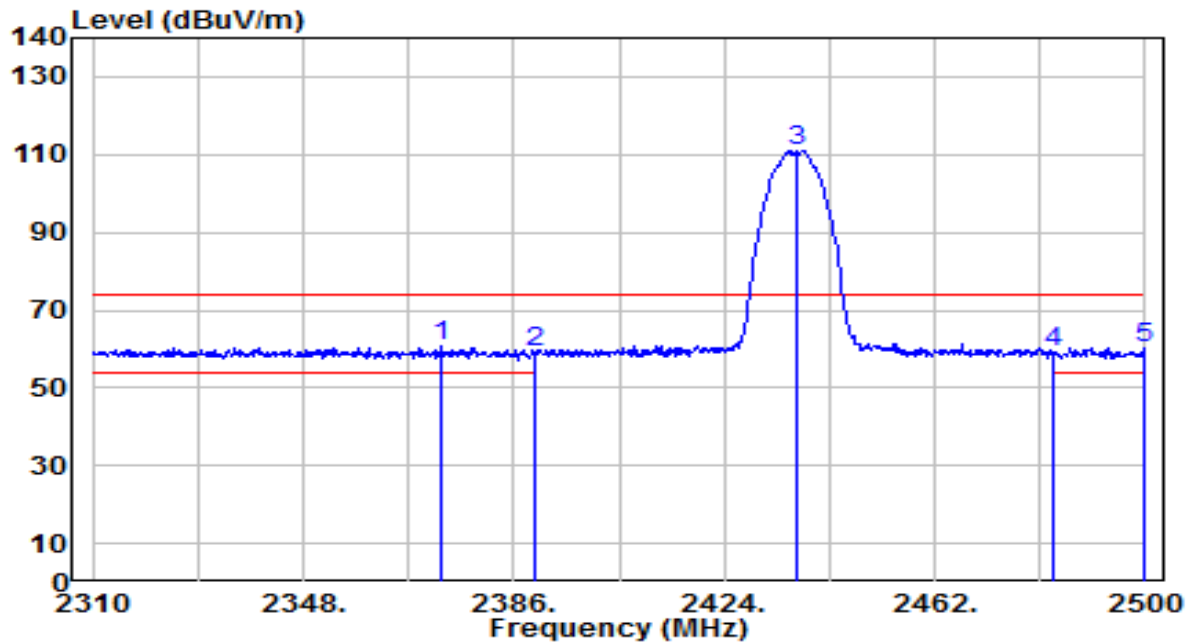


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2372.700	29.02	31.88	60.90	-13.10	74.00	200	285	Peak
2		2390.000	27.42	31.95	59.37	-14.63	74.00	200	285	Peak
3		2437.110	78.78	32.12	110.90	N/A	N/A	200	285	Peak
4		2483.500	26.97	32.30	59.27	-14.73	74.00	200	285	Peak
5		2499.620	27.97	32.36	60.33	-13.67	74.00	200	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

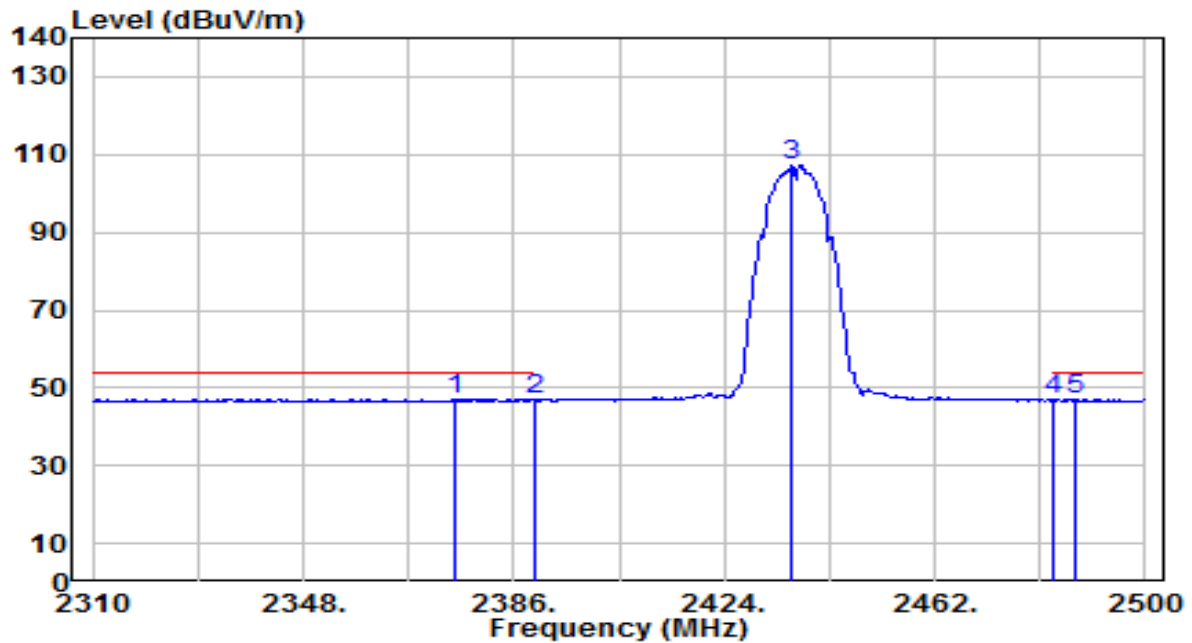


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2375.170	15.23	31.89	47.12	-6.88	54.00	200	285	Average
2		2390.000	14.88	31.95	46.83	-7.17	54.00	200	285	Average
3		2436.160	75.20	32.12	107.32	N/A	N/A	200	285	Average
4		2483.500	14.50	32.30	46.80	-7.20	54.00	200	285	Average
5		2487.270	14.68	32.31	47.00	-7.00	54.00	200	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

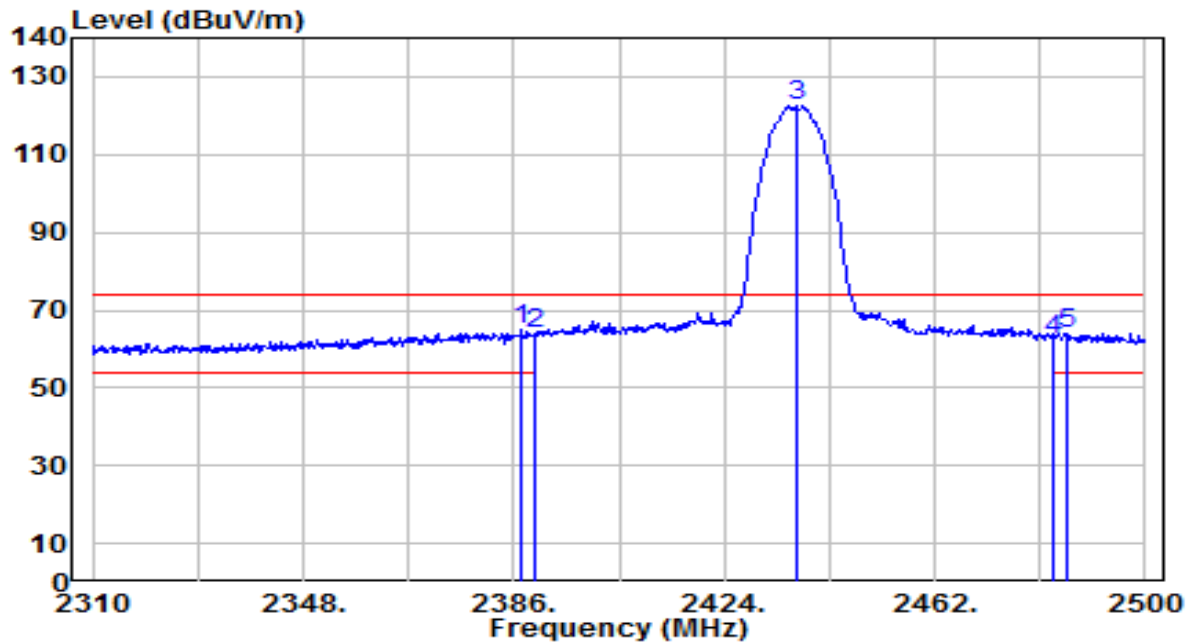


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.330	32.85	31.94	64.79	-9.21	74.00	205	345	Peak
2		2390.000	31.76	31.95	63.71	-10.29	74.00	205	345	Peak
3		2436.920	90.24	32.12	122.36	N/A	N/A	205	345	Peak
4		2483.500	30.23	32.30	62.53	-11.47	74.00	205	345	Peak
5		2485.750	31.71	32.31	64.01	-9.99	74.00	205	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

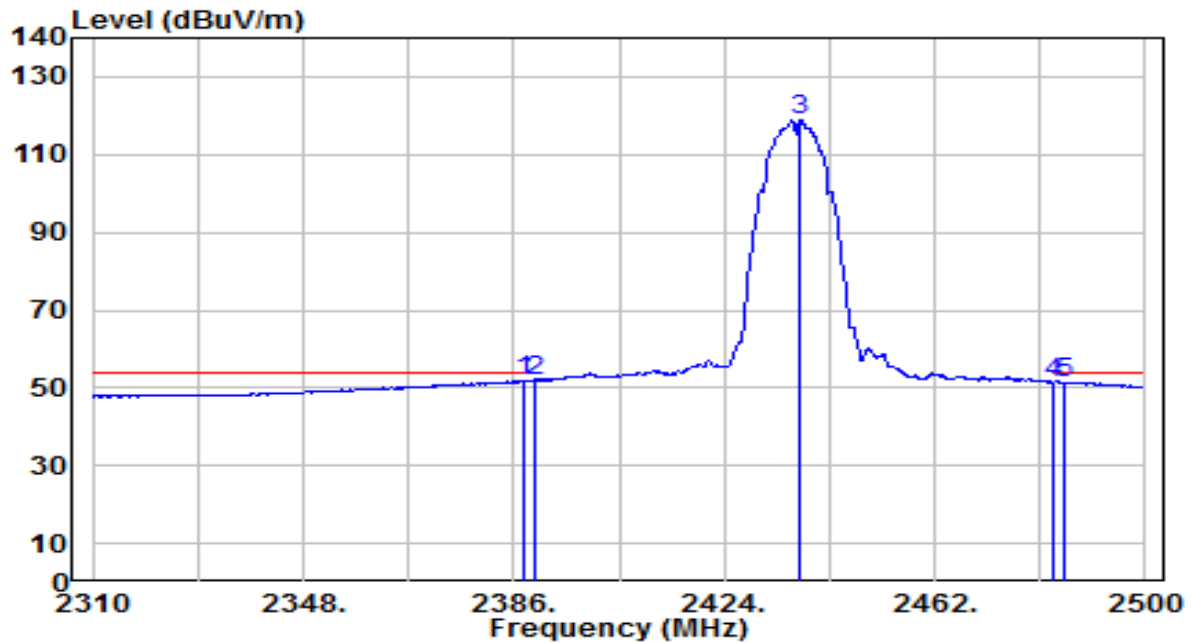


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.900	19.71	31.94	51.65	-2.35	54.00	205	345	Average
2	*	2390.000	20.02	31.95	51.97	-2.03	54.00	205	345	Average
3		2437.680	86.74	32.13	118.87	N/A	N/A	205	345	Average
4		2483.500	19.19	32.30	51.49	-2.51	54.00	205	345	Average
5		2485.180	19.16	32.30	51.47	-2.53	54.00	205	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

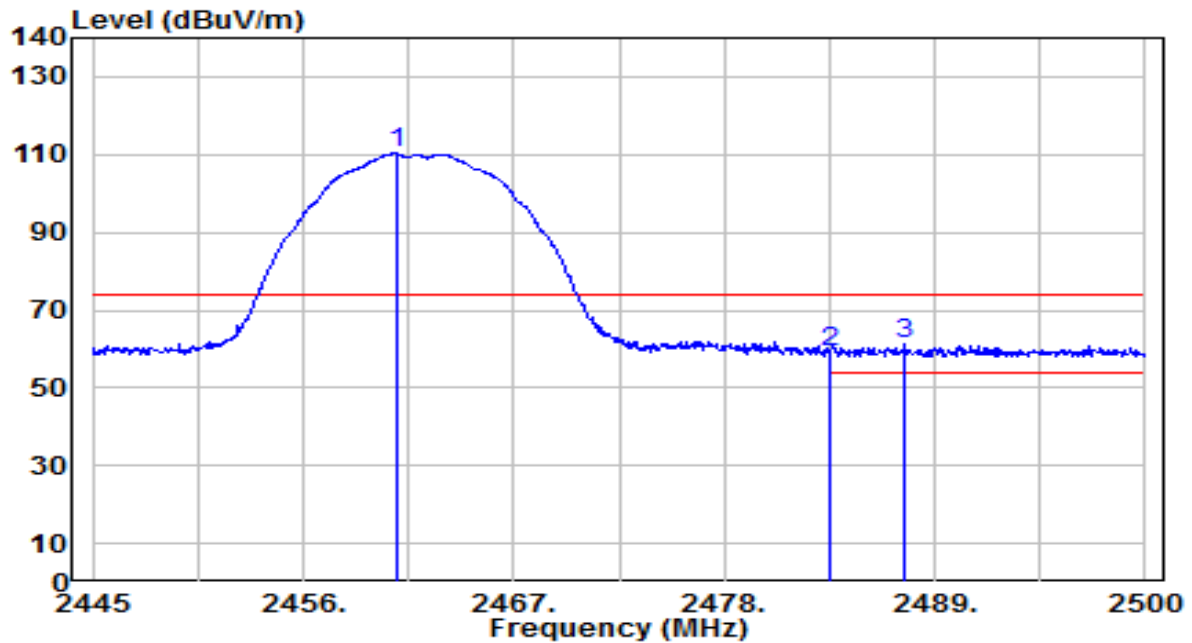


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.840	78.02	32.21	110.24	N/A	N/A	150	290	Peak
2	2483.500	26.87	32.30	59.16	-14.84	74.00	150	290	Peak
3	* 2487.460	29.11	32.31	61.43	-12.57	74.00	150	290	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

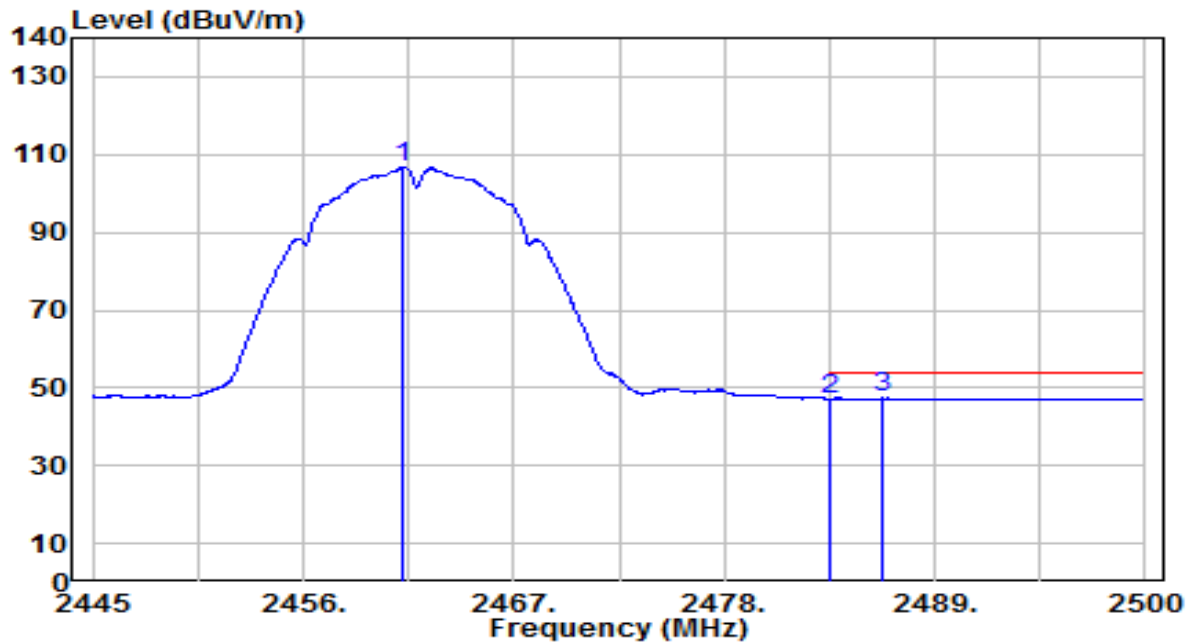


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.225	74.52	32.21	106.73	N/A	N/A	150	290	Average
2	2483.500	14.88	32.30	47.18	-6.82	54.00	150	290	Average
3	* 2486.195	15.00	32.31	47.31	-6.69	54.00	150	290	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

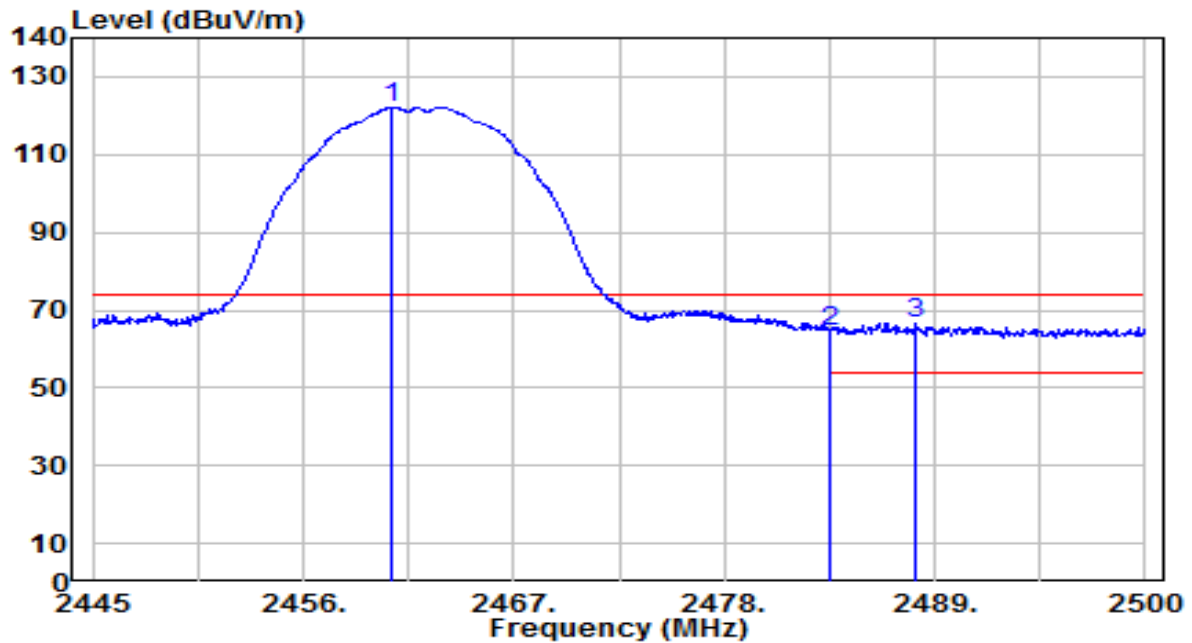


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.675	89.89	32.21	122.10	N/A	N/A	190	340	Peak
2	2483.500	31.93	32.30	64.23	-9.77	74.00	190	340	Peak
3	* 2487.955	34.26	32.31	66.57	-7.43	74.00	190	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

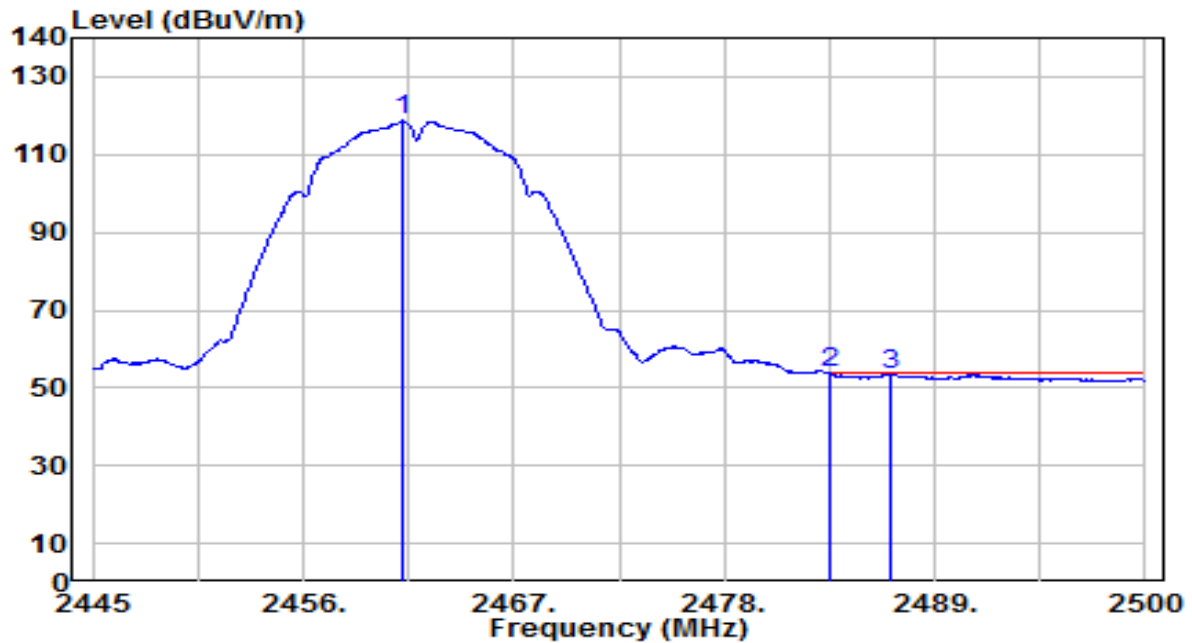


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.170	86.39	32.21	118.61	N/A	N/A	190	340	Average
2	*	2483.500	21.45	32.30	53.74	-0.26	54.00	190	340	Average
3		2486.635	21.14	32.31	53.45	-0.55	54.00	190	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

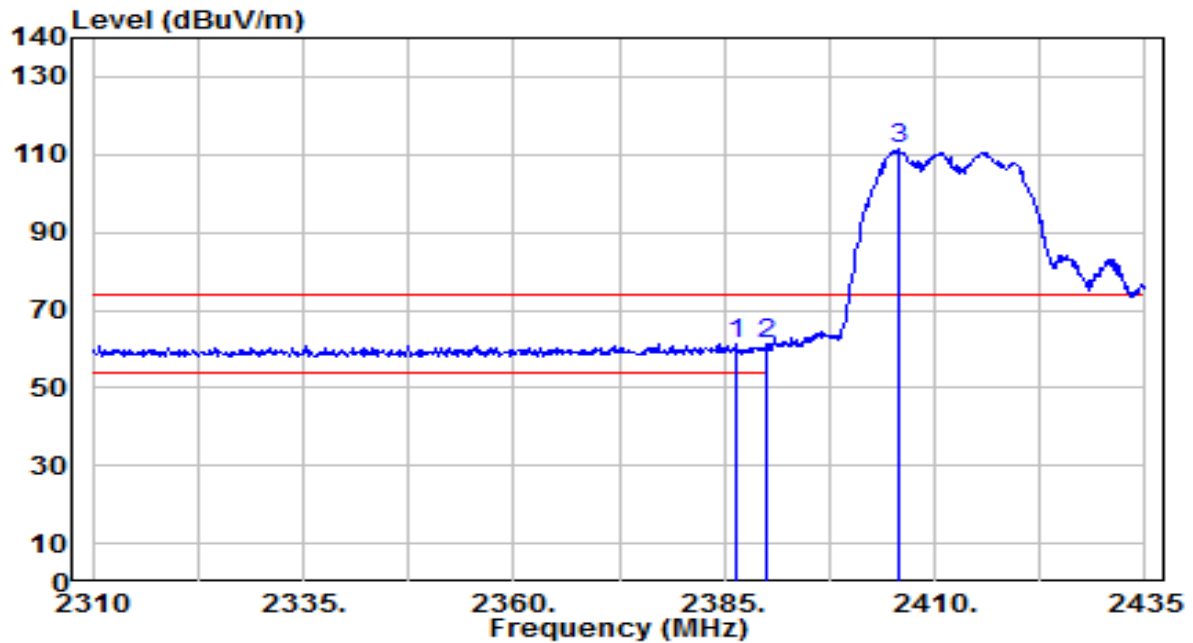


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.375	29.33	31.94	61.27	-12.73	74.00	180	30	Peak
2		2390.000	29.13	31.95	61.08	-12.92	74.00	180	30	Peak
3		2405.625	79.27	32.01	111.27	N/A	N/A	180	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

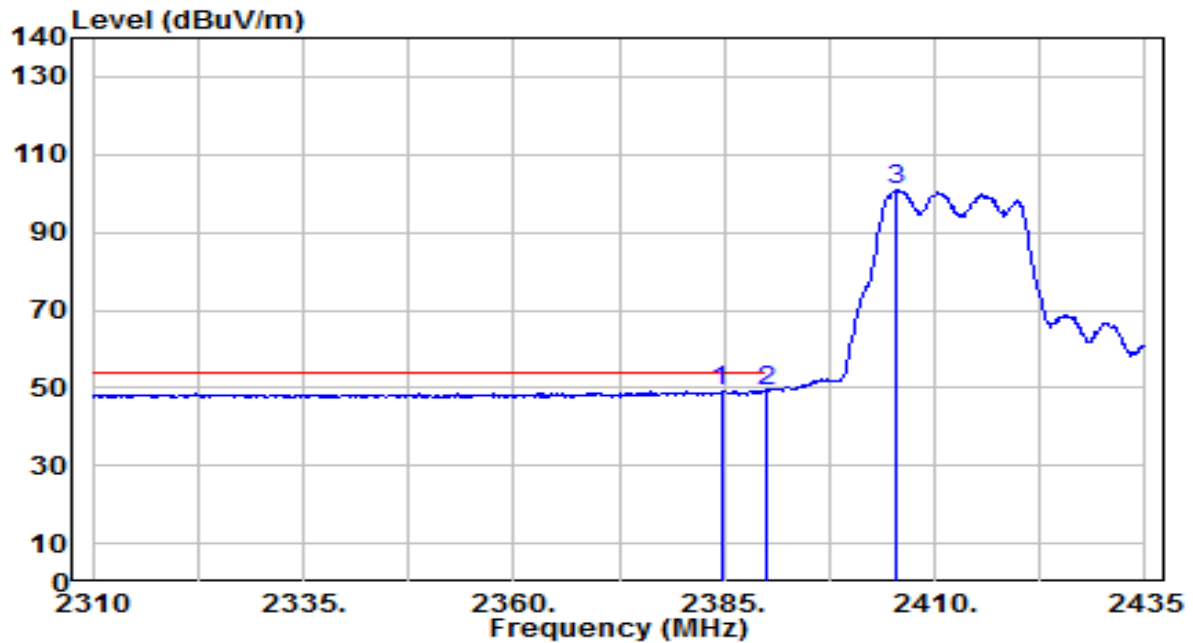


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2384.625	17.17	31.93	49.10	-4.90	54.00	180	30	Average
2	*	2390.000	17.31	31.95	49.26	-4.74	54.00	180	30	Average
3		2405.500	68.98	32.01	100.99	N/A	N/A	180	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

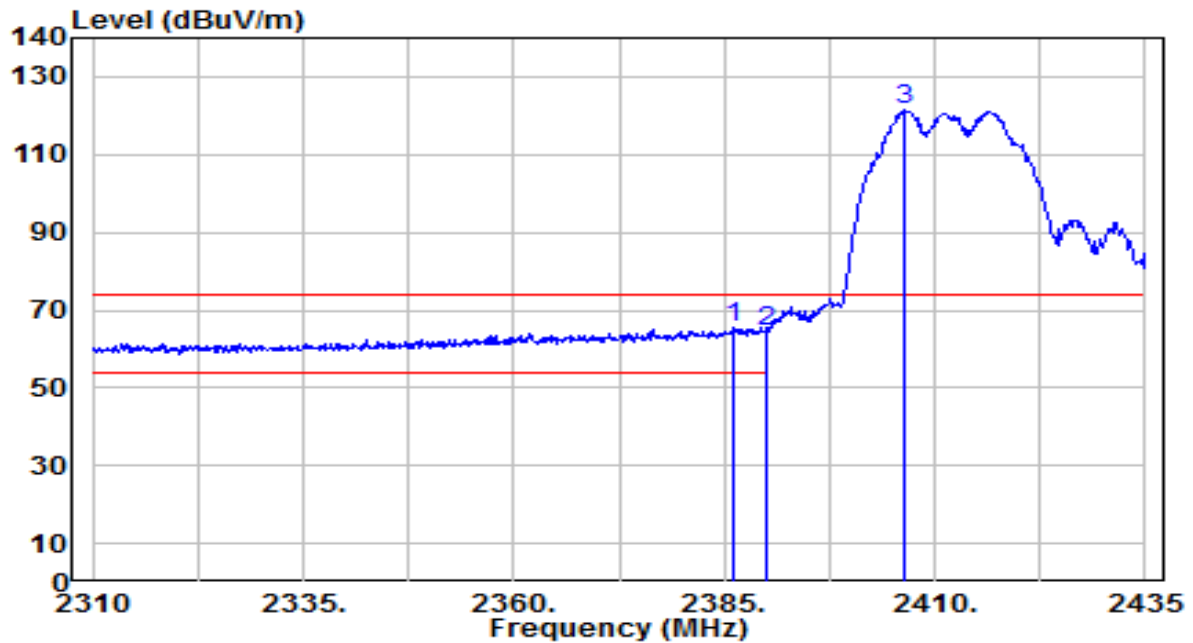


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.250	33.39	31.93	65.32	-8.68	74.00	255	345	Peak
2		2390.000	32.46	31.95	64.41	-9.59	74.00	255	345	Peak
3		2406.375	89.38	32.01	121.39	N/A	N/A	255	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

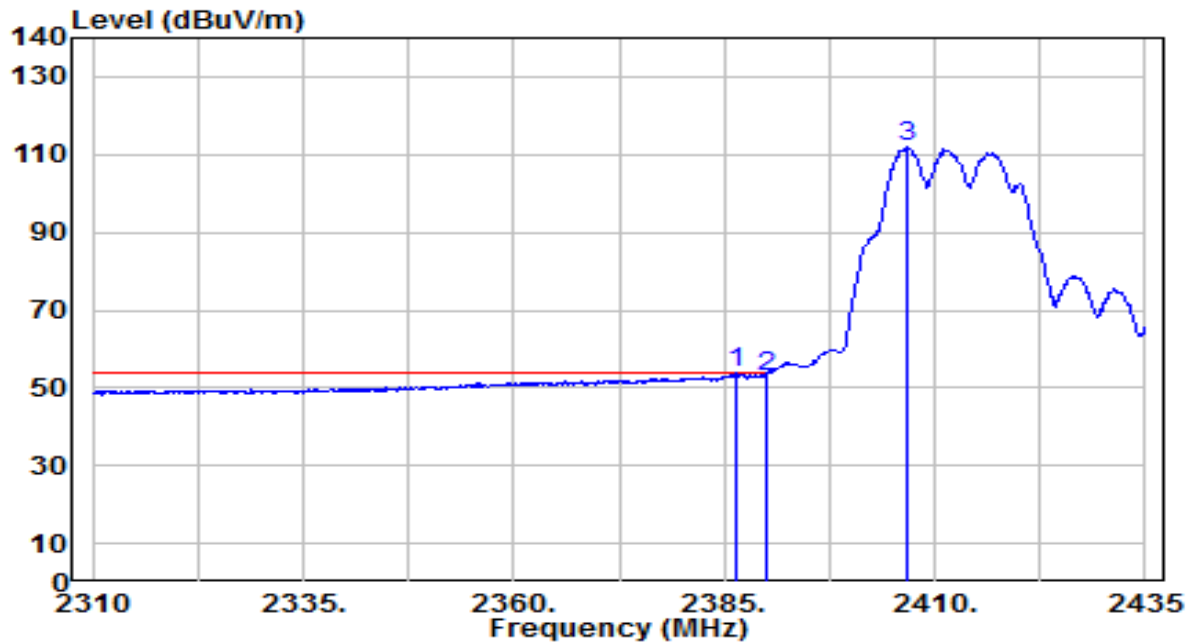


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.375	21.81	31.94	53.74	-0.26	54.00	255	345	Average
2		2390.000	21.07	31.95	53.02	-0.98	54.00	255	345	Average
3		2406.750	79.92	32.01	111.93	N/A	N/A	255	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

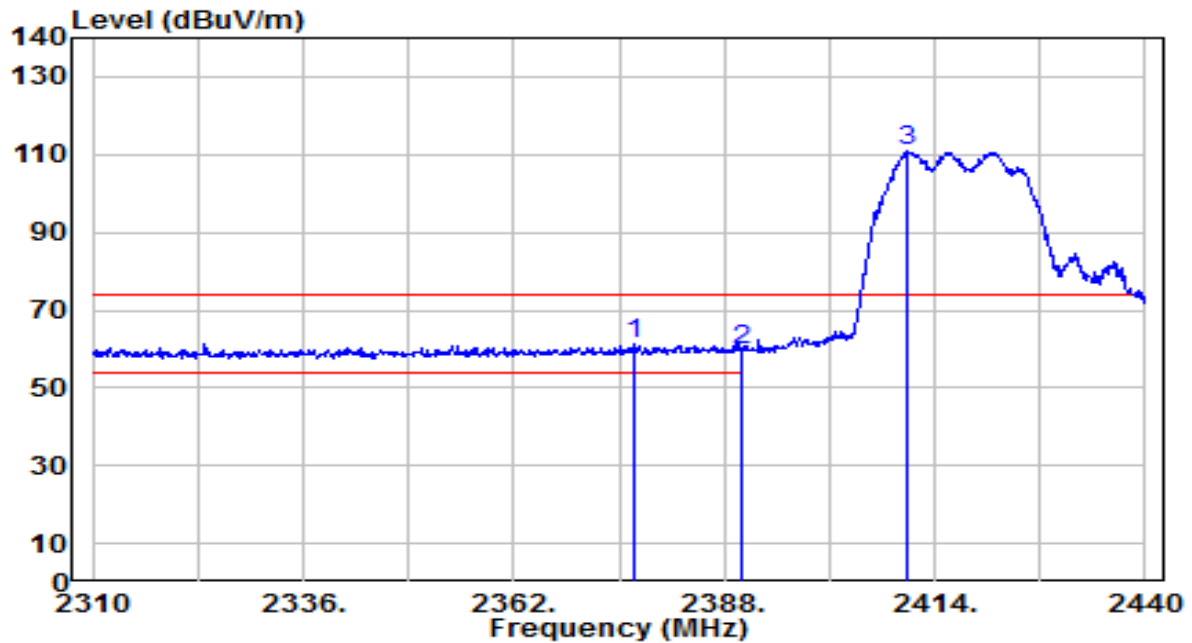


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2376.820	29.31	31.90	61.21	-12.79	74.00	150	320	Peak
2		2390.000	27.72	31.95	59.67	-14.33	74.00	150	320	Peak
3		2410.620	78.77	32.03	110.80	N/A	N/A	150	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

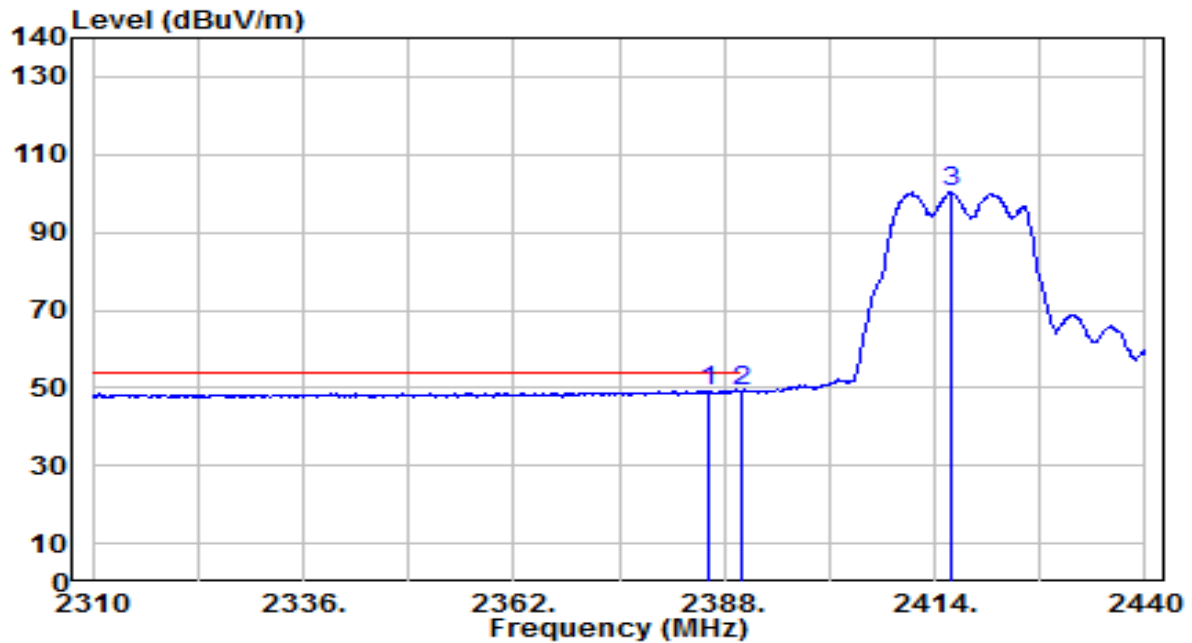


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.920	17.15	31.93	49.09	-4.91	54.00	150	320	Average
2		2390.000	16.99	31.95	48.94	-5.06	54.00	150	320	Average
3		2415.950	68.24	32.05	100.29	N/A	N/A	150	320	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

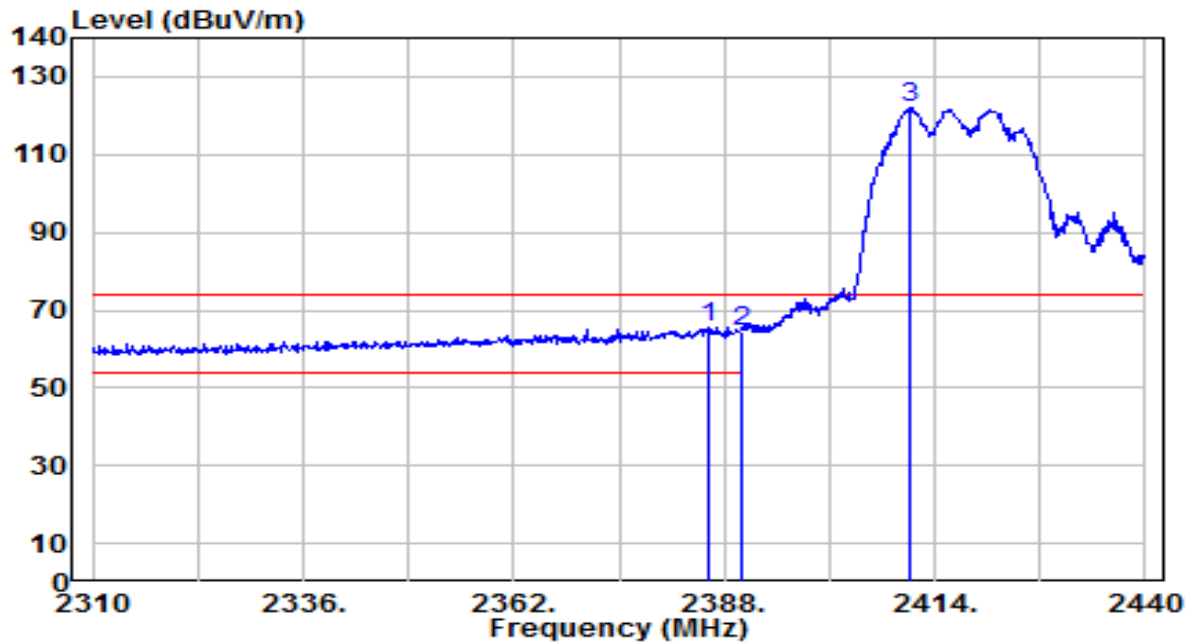


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.920	33.56	31.93	65.49	-8.51	74.00	190	360	Peak
2		2390.000	32.66	31.95	64.61	-9.39	74.00	190	360	Peak
3		2411.010	89.94	32.03	121.97	N/A	N/A	190	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

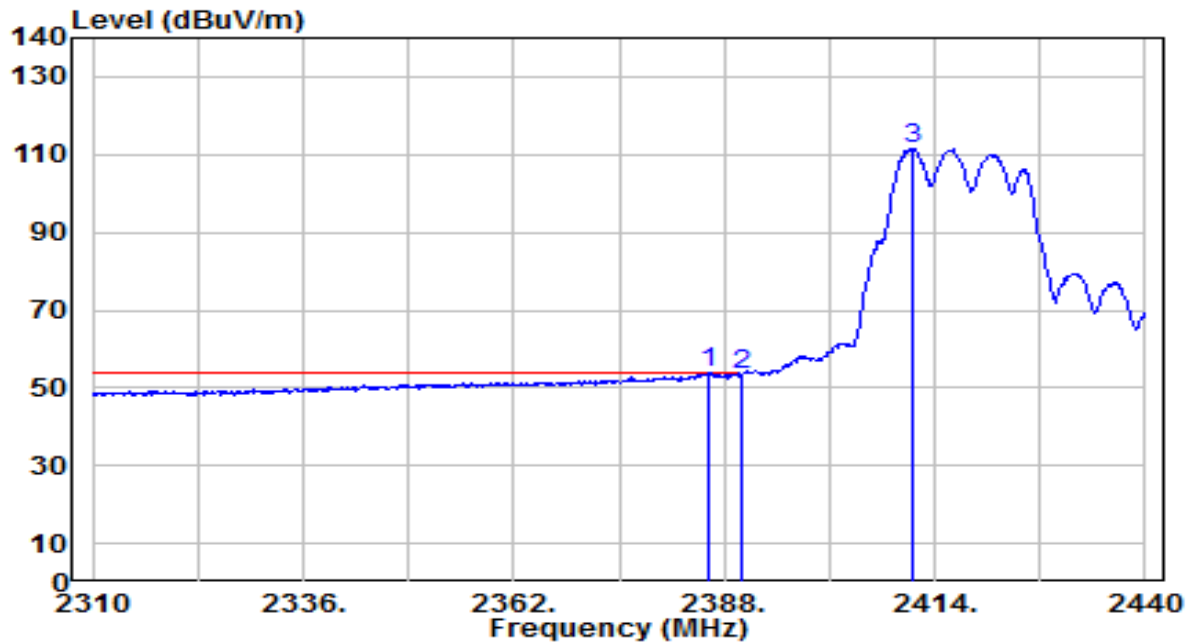


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.180	21.79	31.93	53.72	-0.28	54.00	190	360	Average
2		2390.000	21.54	31.95	53.49	-0.51	54.00	190	360	Average
3		2411.140	79.48	32.03	111.51	N/A	N/A	190	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

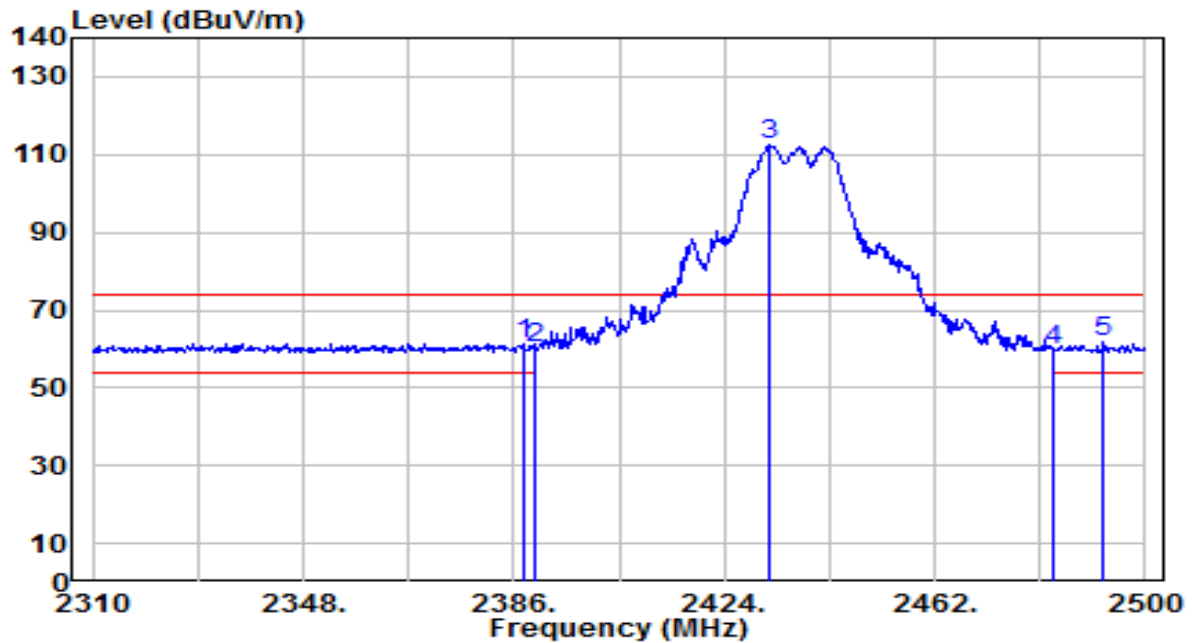


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	29.51	31.94	61.45	-12.55	74.00	200	270	Peak
2	2390.000	28.34	31.95	60.29	-13.71	74.00	200	270	Peak
3	2432.170	80.27	32.11	112.38	N/A	N/A	200	270	Peak
4	2483.500	27.38	32.30	59.68	-14.32	74.00	200	270	Peak
5	* 2492.590	29.68	32.33	62.01	-11.99	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

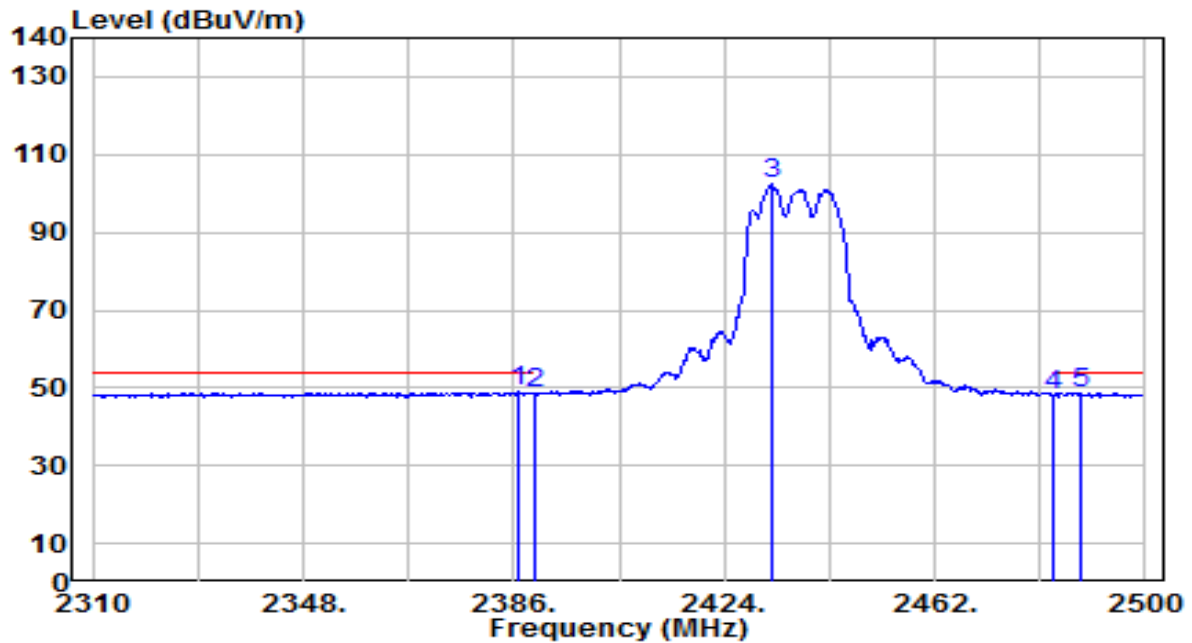


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.950	16.95	31.94	48.88	-5.12	54.00	200	270	Average
2		2390.000	16.55	31.95	48.50	-5.50	54.00	200	270	Average
3		2432.550	70.31	32.11	102.42	N/A	N/A	200	270	Average
4		2483.500	15.93	32.30	48.23	-5.77	54.00	200	270	Average
5		2488.220	16.26	32.32	48.58	-5.42	54.00	200	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

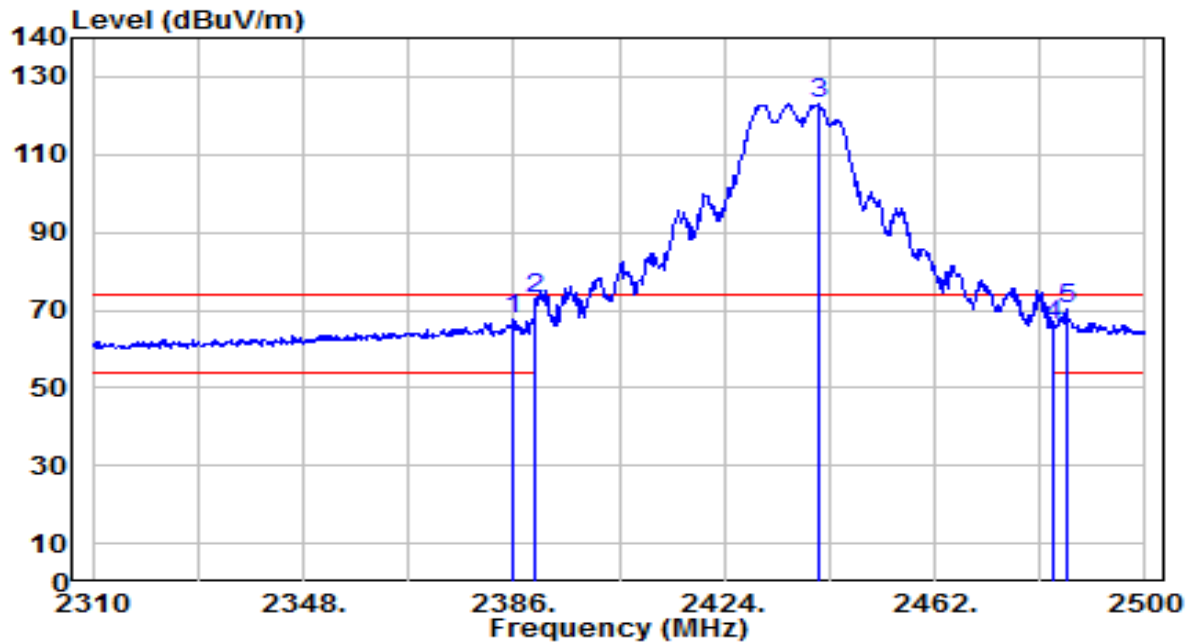


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	35.62	31.93	67.55	-6.45	74.00	165	5	Peak
2	* 2390.000	41.07	31.95	73.02	-0.98	74.00	165	5	Peak
3	2441.100	90.75	32.14	122.89	N/A	N/A	165	5	Peak
4	2483.500	33.57	32.30	65.86	-8.14	74.00	165	5	Peak
5	2485.750	38.19	32.31	70.49	-3.51	74.00	165	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

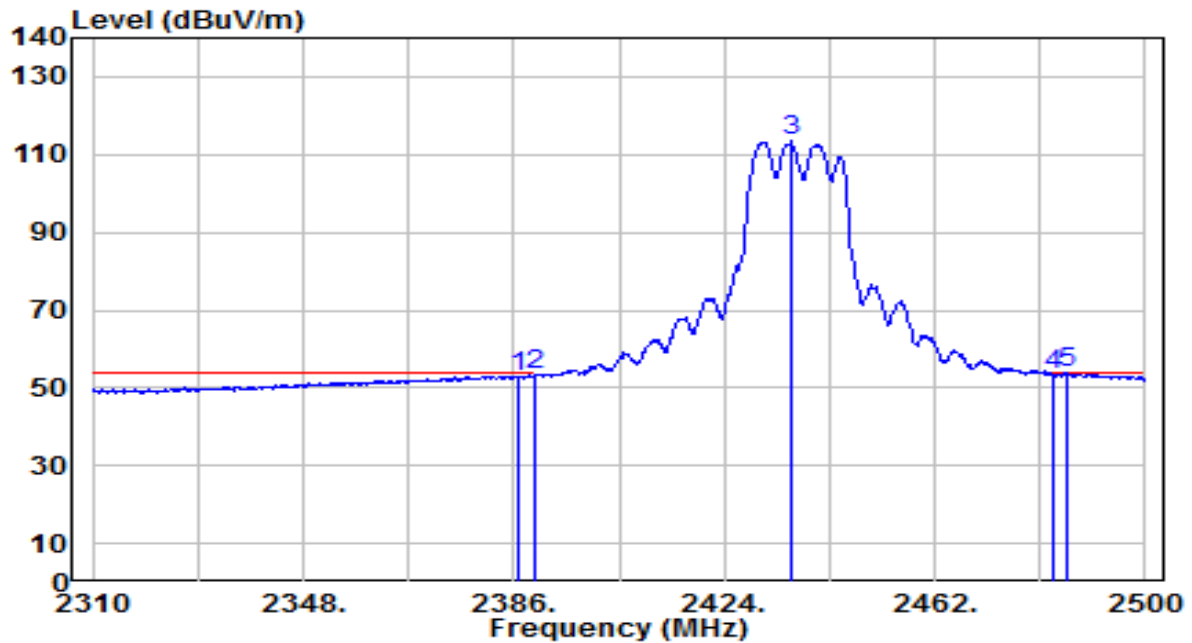


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	21.13	31.94	53.07	-0.93	54.00	165	5	Average
2	2390.000	21.18	31.95	53.13	-0.87	54.00	165	5	Average
3	2436.160	81.22	32.12	113.34	N/A	N/A	165	5	Average
4	2483.500	21.10	32.30	53.39	-0.61	54.00	165	5	Average
5	* 2486.130	21.45	32.31	53.76	-0.24	54.00	165	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

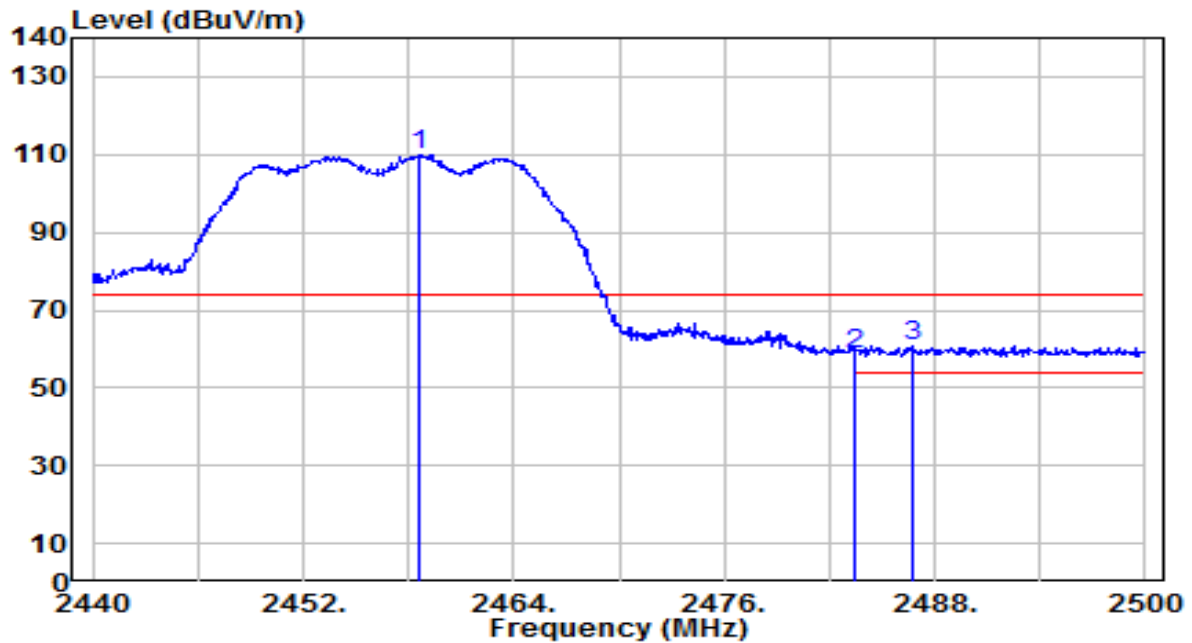


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.600	77.69	32.21	109.89	N/A	N/A	105	5	Peak
2	2483.500	26.50	32.30	58.80	-15.20	74.00	105	5	Peak
3	* 2486.680	28.36	32.31	60.67	-13.33	74.00	105	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

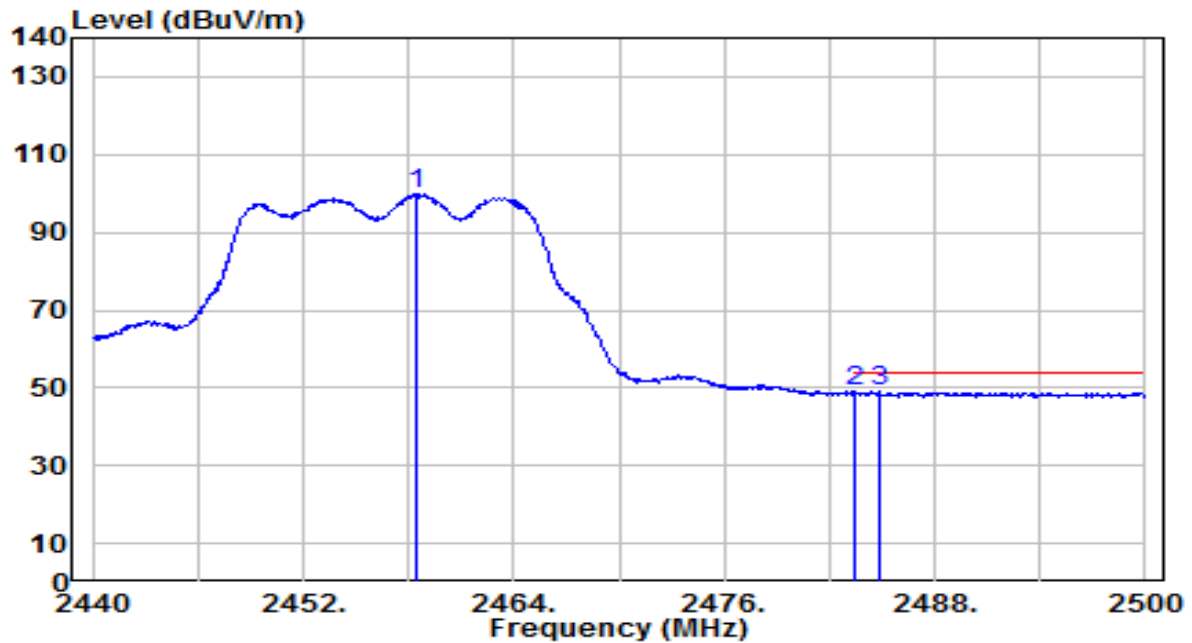


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.420	67.68	32.20	99.88	N/A	N/A	105	5	Average
2	*	2483.500	16.84	32.30	49.14	-4.86	54.00	105	5	Average
3		2484.820	16.57	32.30	48.87	-5.13	54.00	105	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

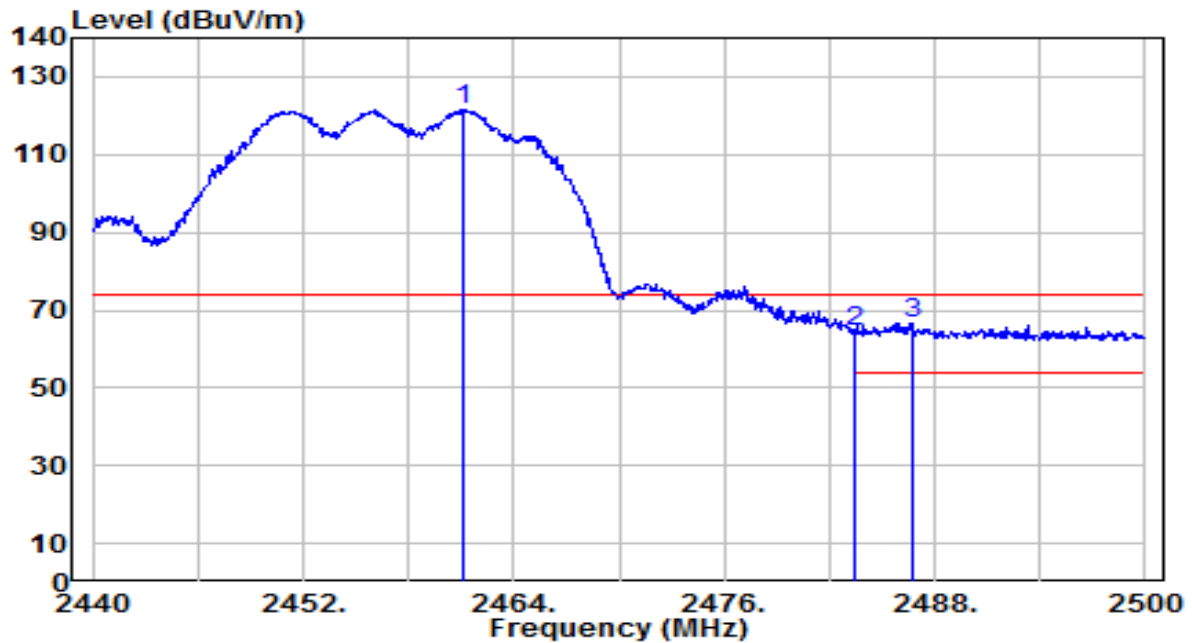


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	89.42	32.21	121.63	N/A	N/A	180	355	Peak
2	2483.500	32.28	32.30	64.58	-9.42	74.00	180	355	Peak
3	* 2486.680	34.40	32.31	66.71	-7.29	74.00	180	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

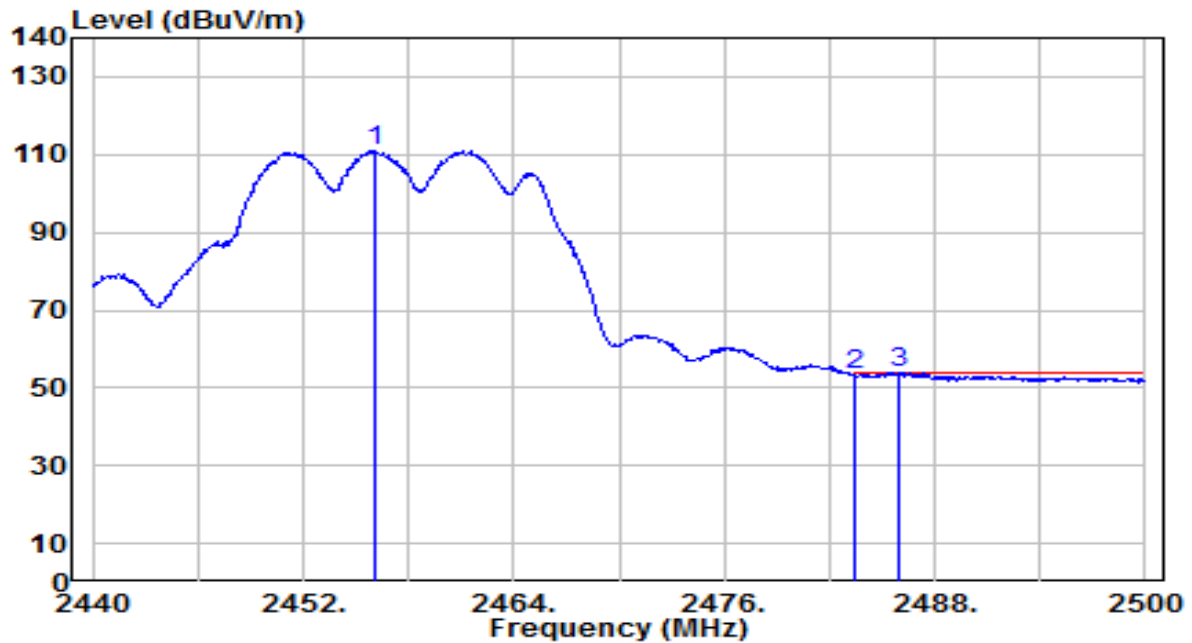


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.080	78.82	32.20	111.01	N/A	N/A	180	355	Average
2	2483.500	20.93	32.30	53.22	-0.78	54.00	180	355	Average
3	* 2486.020	21.56	32.31	53.87	-0.13	54.00	180	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

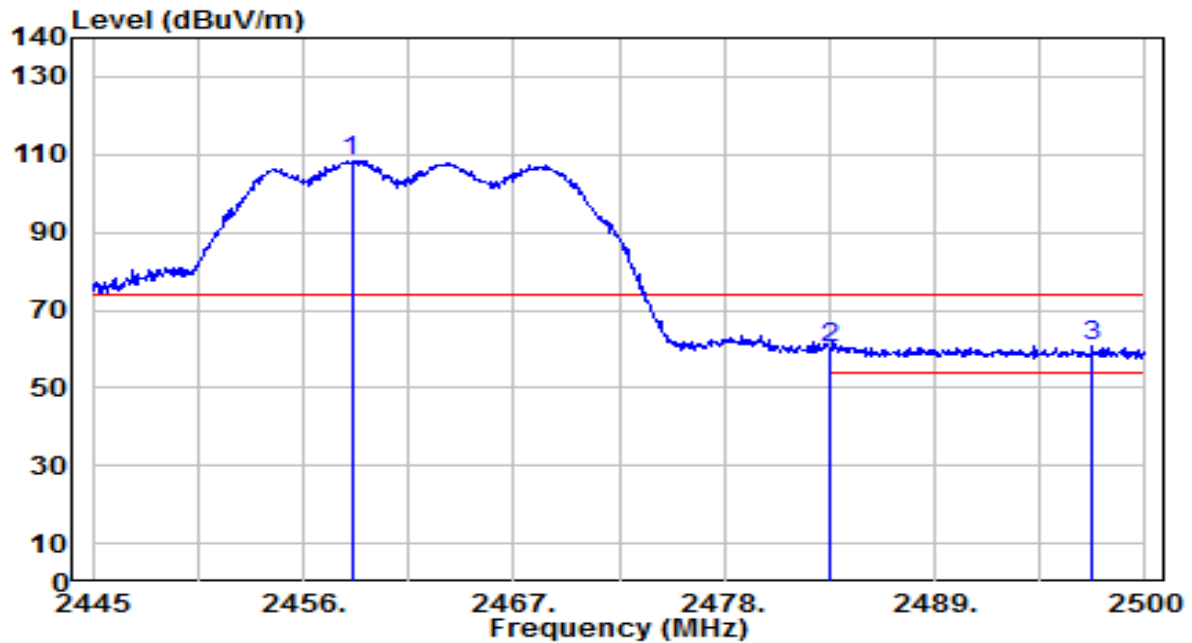


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.530	76.20	32.20	108.40	N/A	N/A	105	5	Peak
2	2483.500	27.89	32.30	60.19	-13.81	74.00	105	5	Peak
3	* 2497.195	28.26	32.35	60.61	-13.39	74.00	105	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

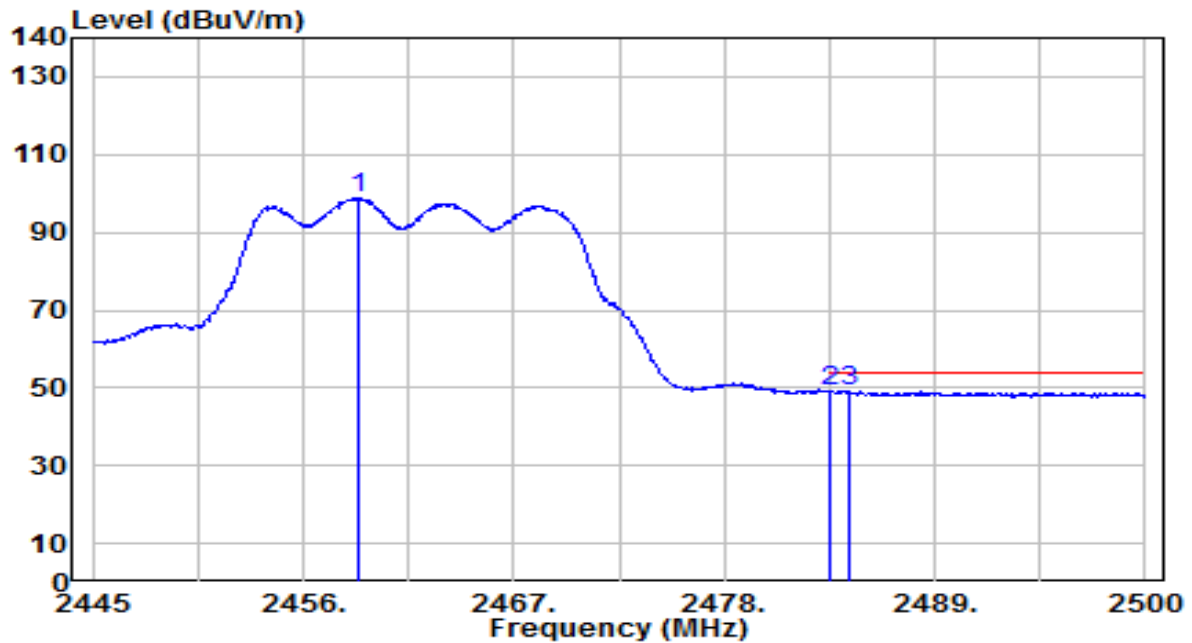


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.915	66.61	32.21	98.82	N/A	N/A	105	5	Average
2	2483.500	16.60	32.30	48.90	-5.10	54.00	105	5	Average
3	* 2484.545	16.87	32.30	49.17	-4.83	54.00	105	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

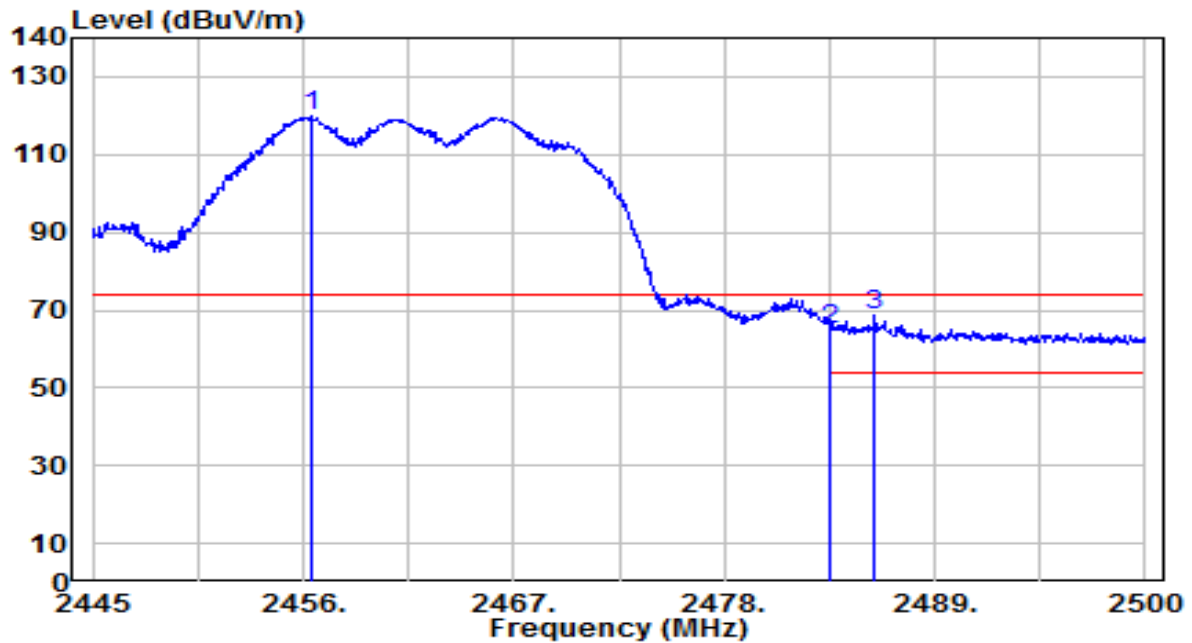


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.440	87.62	32.20	119.82	N/A	N/A	180	355	Peak
2	2483.500	32.92	32.30	65.22	-8.78	74.00	180	355	Peak
3	* 2485.865	36.28	32.31	68.59	-5.41	74.00	180	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

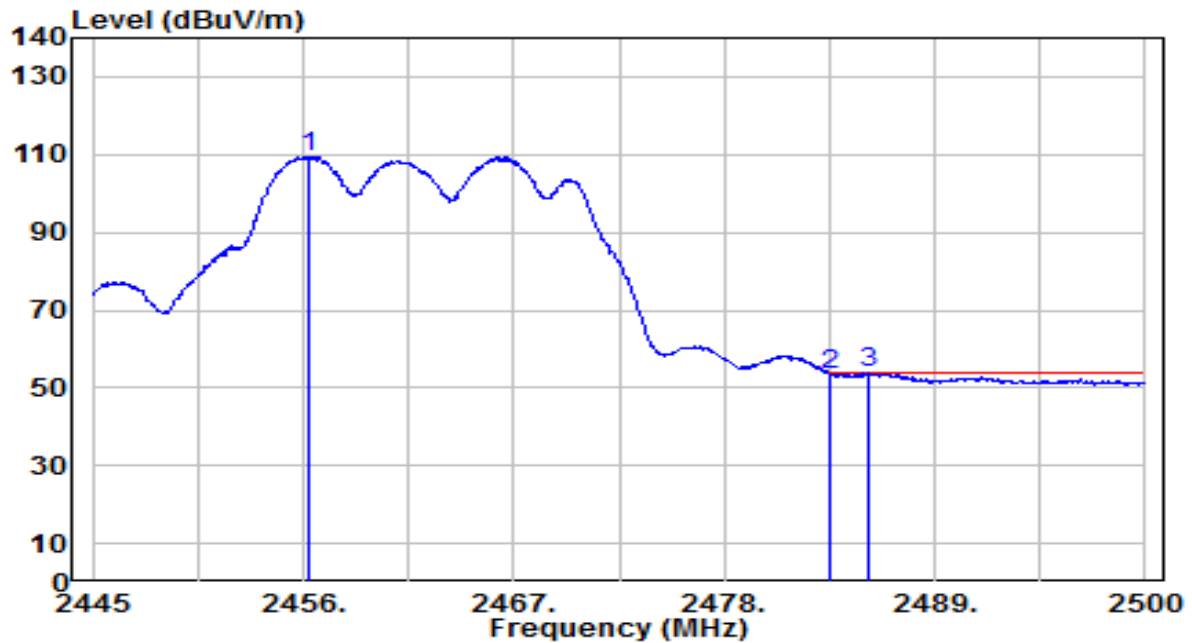


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.330	77.33	32.20	109.53	N/A	N/A	180	355	Average
2	2483.500	21.12	32.30	53.42	-0.58	54.00	180	355	Average
3	* 2485.480	21.40	32.31	53.71	-0.29	54.00	180	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

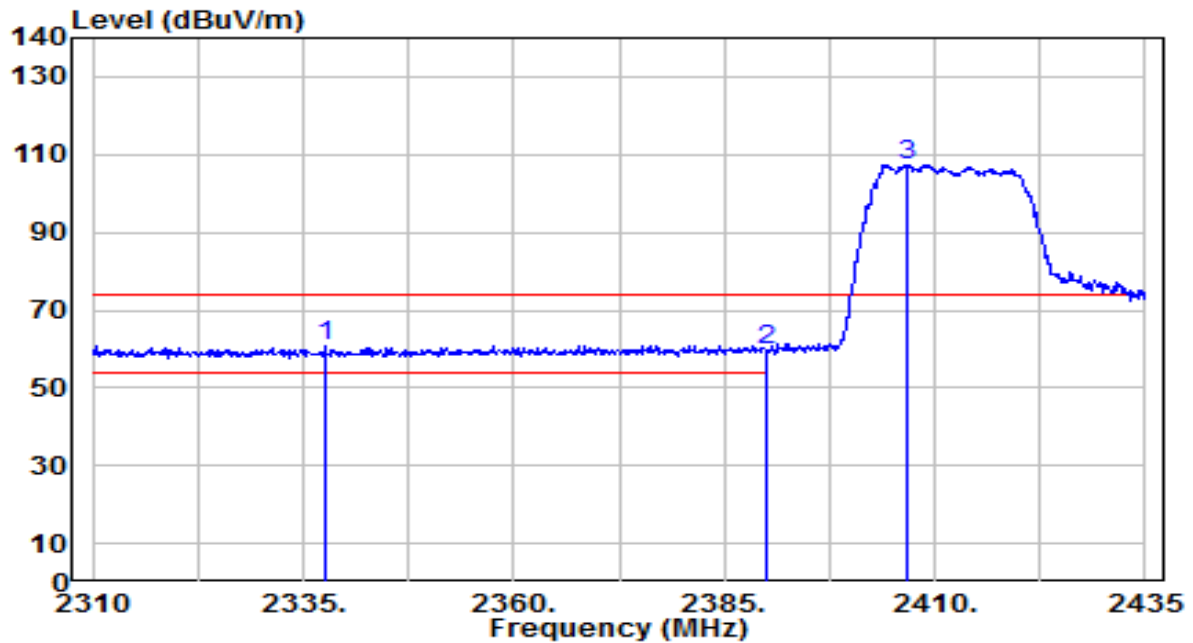


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2337.500	29.08	31.75	60.84	-13.16	74.00	180	30	Peak
2		2390.000	27.98	31.95	59.92	-14.08	74.00	180	30	Peak
3		2406.750	75.41	32.01	107.42	N/A	N/A	180	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

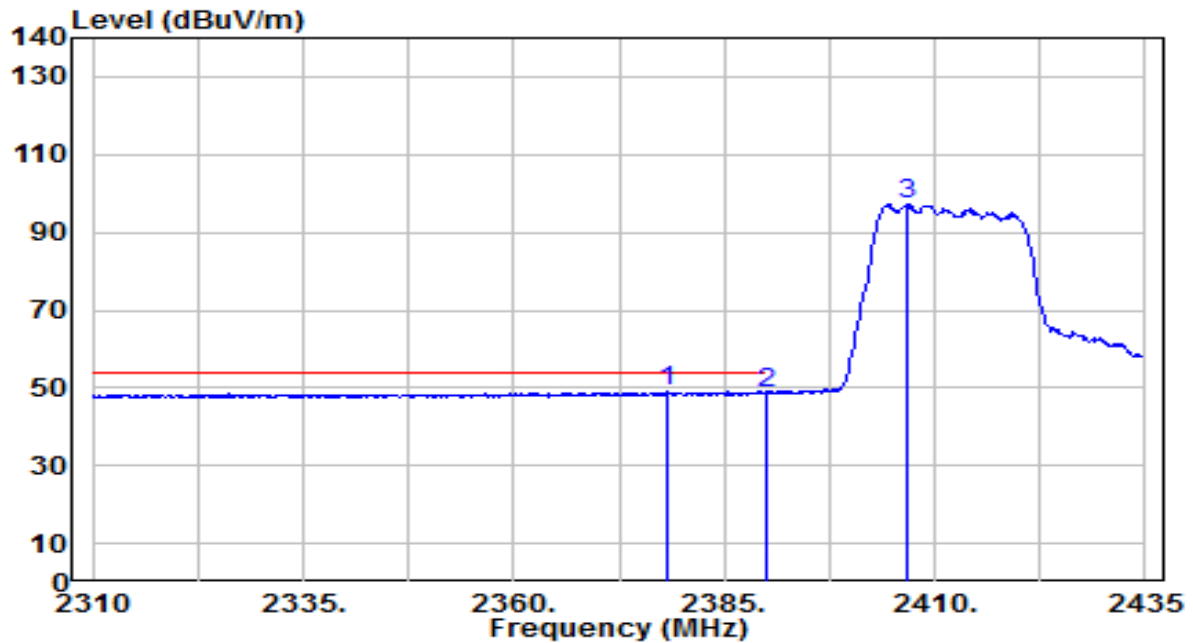


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.125	17.02	31.90	48.92	-5.08	54.00	180	30	Average
2		2390.000	16.57	31.95	48.52	-5.48	54.00	180	30	Average
3		2406.625	65.25	32.01	97.26	N/A	N/A	180	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

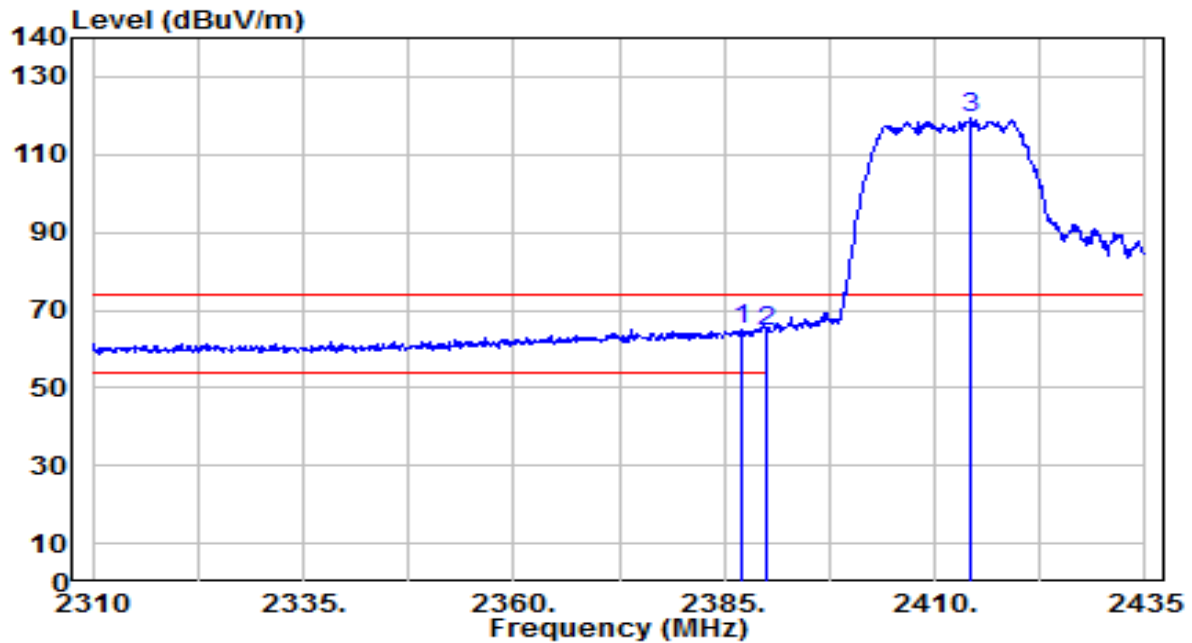


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.125	33.29	31.94	65.22	-8.78	74.00	190	355	Peak
2		2390.000	32.50	31.95	64.45	-9.55	74.00	190	355	Peak
3		2414.375	87.31	32.04	119.35	N/A	N/A	190	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

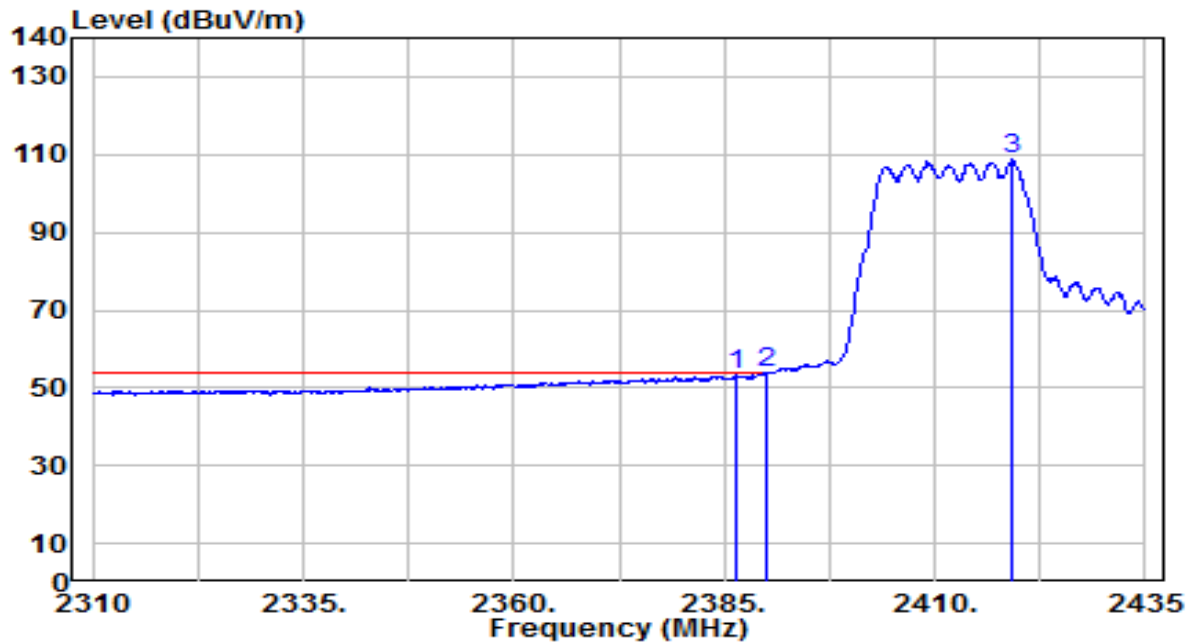


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.500	21.30	31.94	53.24	-0.76	54.00	190	355	Average
2	*	2390.000	21.79	31.95	53.74	-0.26	54.00	190	355	Average
3		2419.250	76.53	32.06	108.58	N/A	N/A	190	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

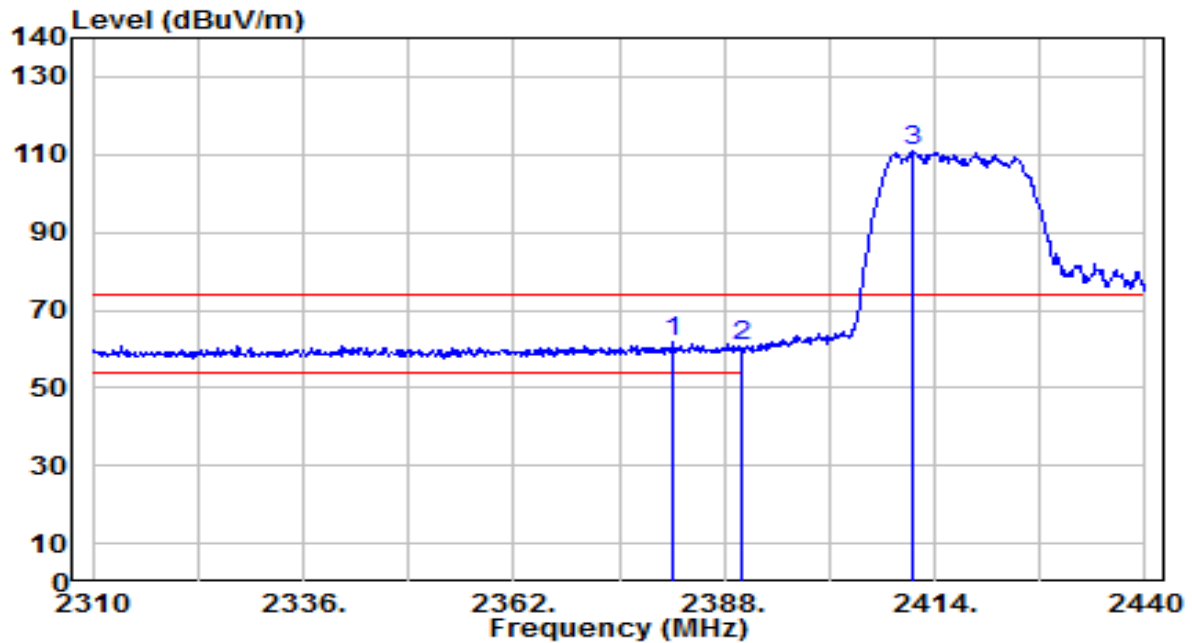


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.500	29.85	31.92	61.76	-12.24	74.00	150	320	Peak
2		2390.000	28.92	31.95	60.87	-13.13	74.00	150	320	Peak
3		2411.140	78.99	32.03	111.02	N/A	N/A	150	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

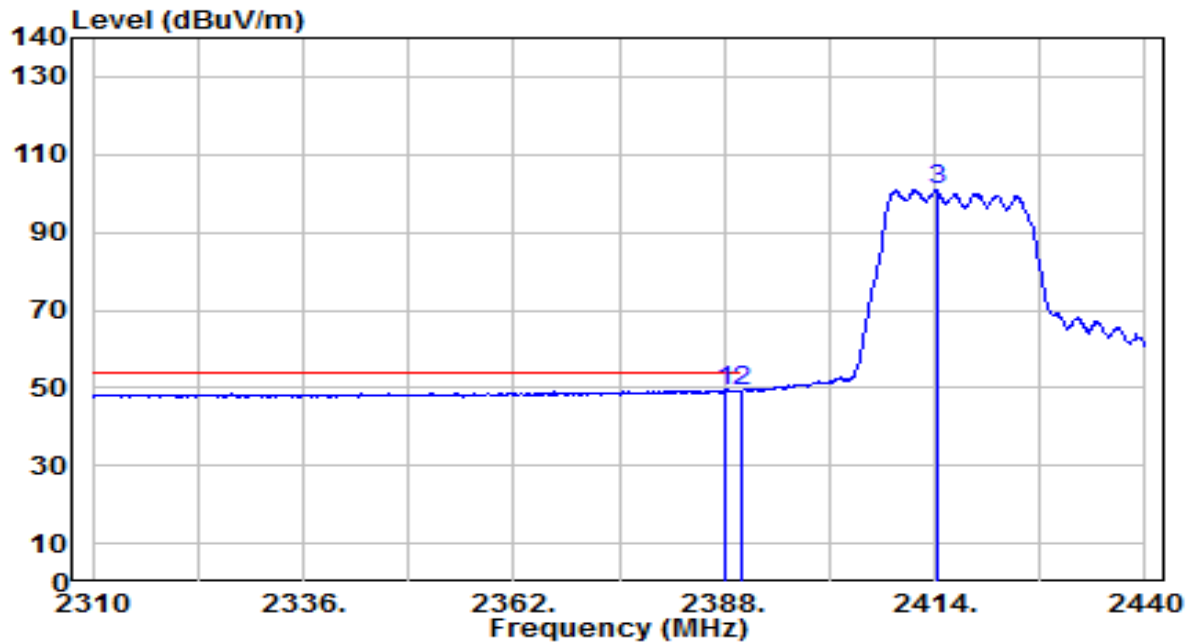


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	17.37	31.94	49.31	-4.69	54.00	150	320	Average
2		2390.000	17.13	31.95	49.08	-4.92	54.00	150	320	Average
3		2414.260	68.93	32.04	100.97	N/A	N/A	150	320	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

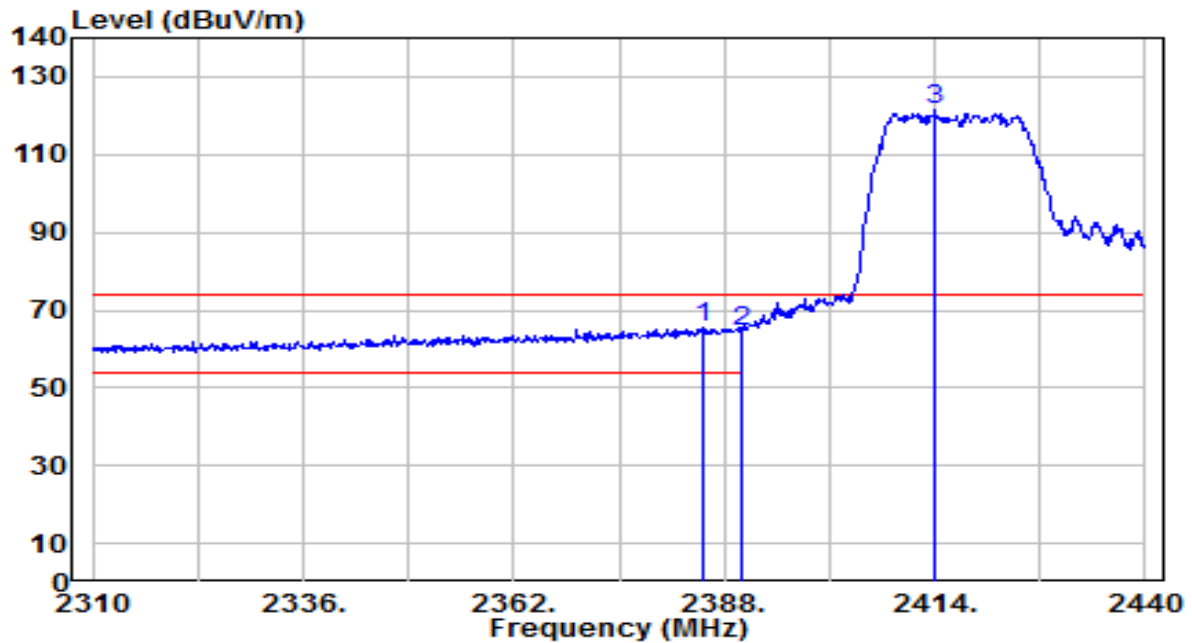


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.400	33.55	31.93	65.48	-8.52	74.00	175	360	Peak
2		2390.000	32.39	31.95	64.34	-9.66	74.00	175	360	Peak
3		2414.130	89.31	32.04	121.35	N/A	N/A	175	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

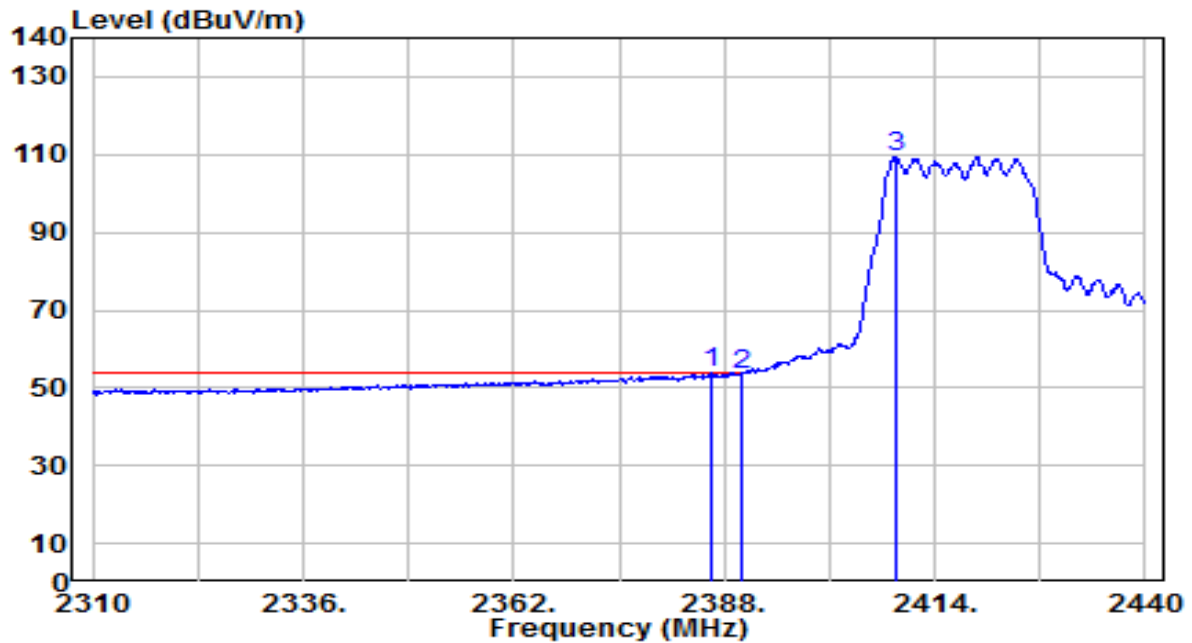


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.440	21.92	31.94	53.85	-0.15	54.00	175	360	Average
2		2390.000	21.67	31.95	53.62	-0.38	54.00	175	360	Average
3		2409.320	77.32	32.02	109.34	N/A	N/A	175	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

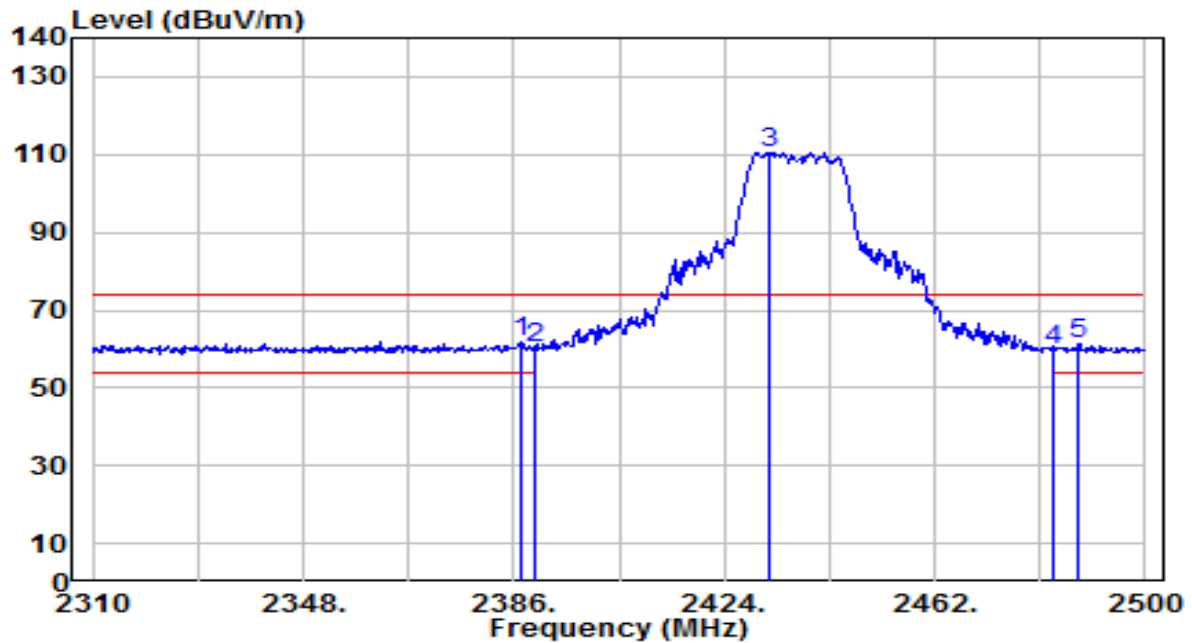


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.520	30.11	31.94	62.05	-11.95	74.00	200	270	Peak
2		2390.000	28.30	31.95	60.24	-13.76	74.00	200	270	Peak
3		2431.980	78.57	32.11	110.67	N/A	N/A	200	270	Peak
4		2483.500	27.65	32.30	59.95	-14.05	74.00	200	270	Peak
5		2487.840	28.87	32.31	61.18	-12.82	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

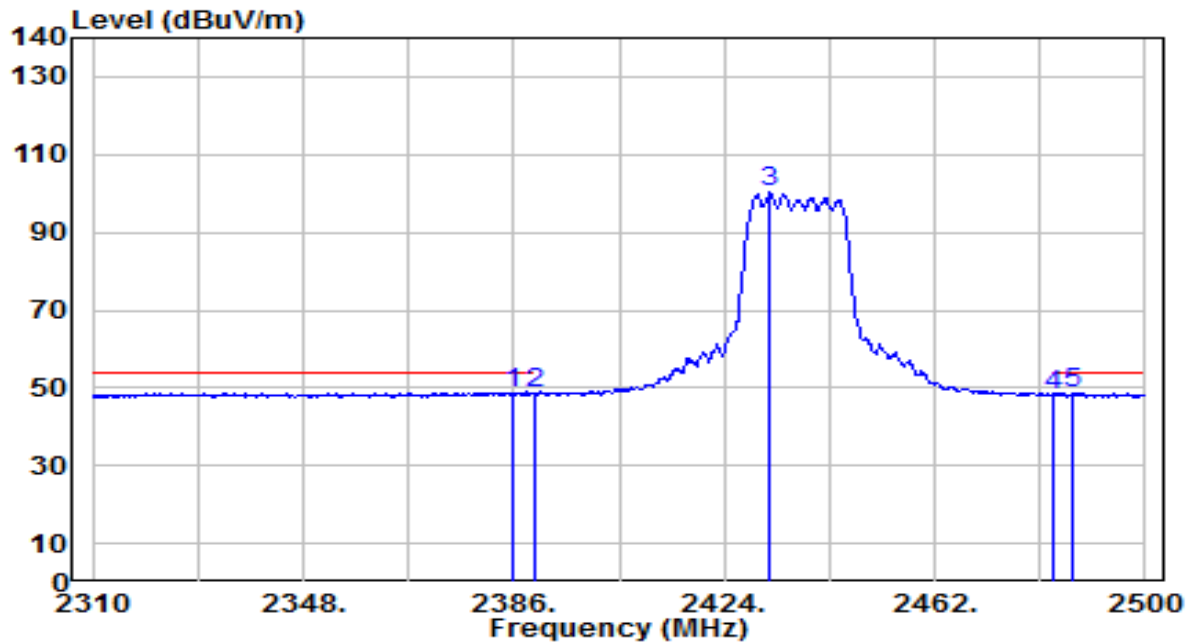


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.810	16.77	31.93	48.71	-5.29	54.00	200	270	Average
2		2390.000	16.72	31.95	48.67	-5.33	54.00	200	270	Average
3		2432.360	68.10	32.11	100.20	N/A	N/A	200	270	Average
4		2483.500	15.91	32.30	48.21	-5.79	54.00	200	270	Average
5		2487.080	16.27	32.31	48.58	-5.42	54.00	200	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

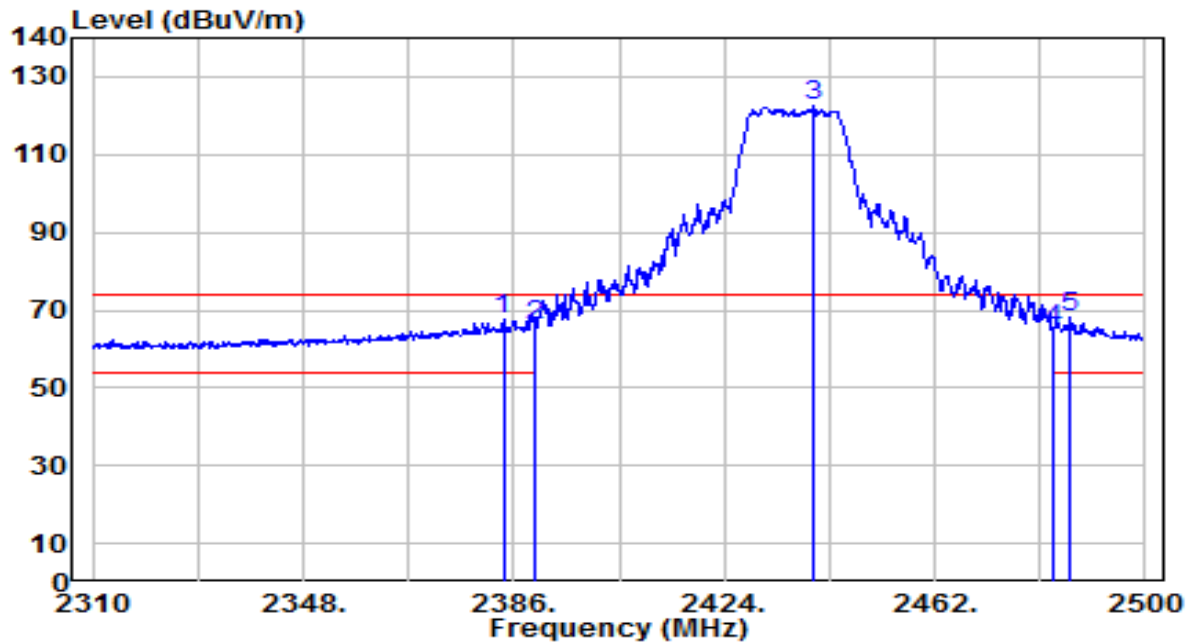


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.100	35.80	31.93	67.72	-6.28	74.00	210	360	Peak
2	2390.000	33.99	31.95	65.94	-8.06	74.00	210	360	Peak
3	2440.150	90.19	32.14	122.33	N/A	N/A	210	360	Peak
4	2483.500	32.60	32.30	64.90	-9.10	74.00	210	360	Peak
5	* 2486.510	35.85	32.31	68.16	-5.84	74.00	210	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

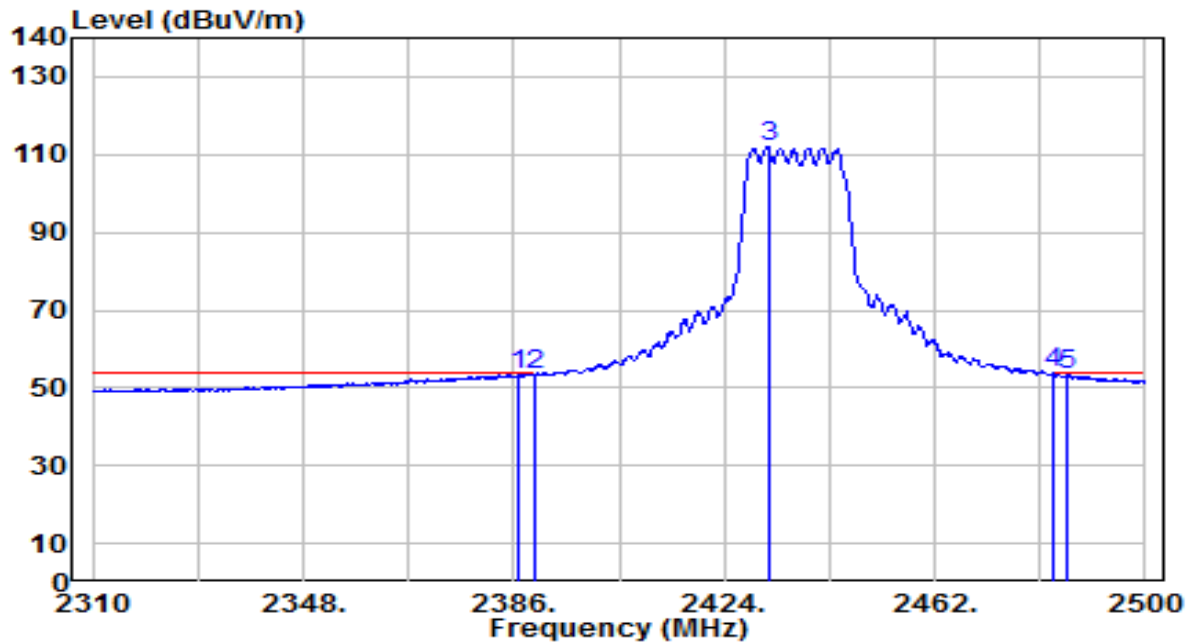


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	21.49	31.94	53.43	-0.57	54.00	210	360	Average
2	2390.000	21.19	31.95	53.14	-0.86	54.00	210	360	Average
3	2431.980	79.85	32.11	111.95	N/A	N/A	210	360	Average
4	* 2483.500	21.40	32.30	53.70	-0.30	54.00	210	360	Average
5	2486.130	20.95	32.31	53.25	-0.75	54.00	210	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

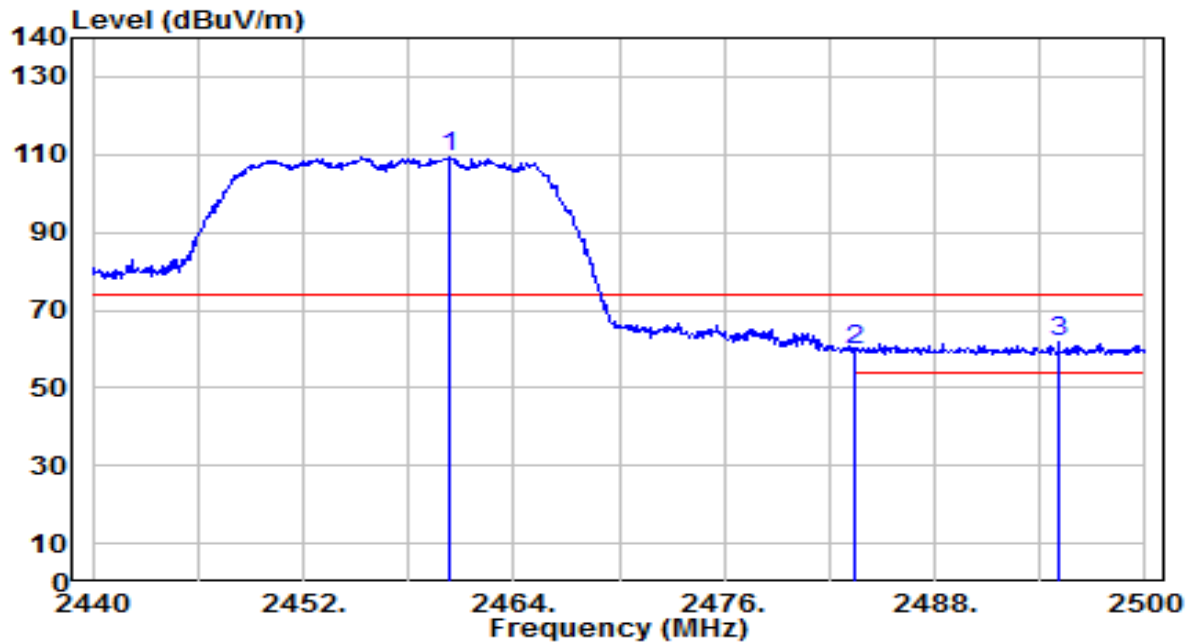


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.340	77.32	32.21	109.53	N/A	N/A	105	5	Peak
2	2483.500	27.30	32.30	59.60	-14.40	74.00	105	5	Peak
3	* 2495.080	29.27	32.34	61.61	-12.39	74.00	105	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

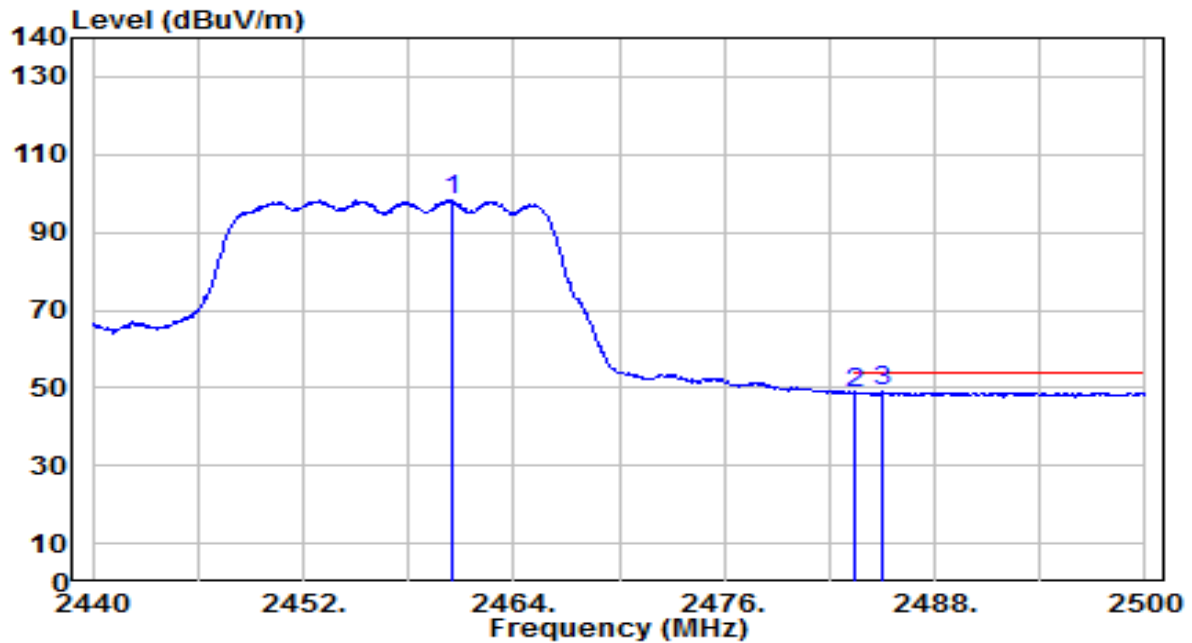


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.460	66.28	32.21	98.50	N/A	N/A	105	5	Average
2	2483.500	16.50	32.30	48.80	-5.20	54.00	105	5	Average
3	* 2485.000	16.59	32.30	48.89	-5.11	54.00	105	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

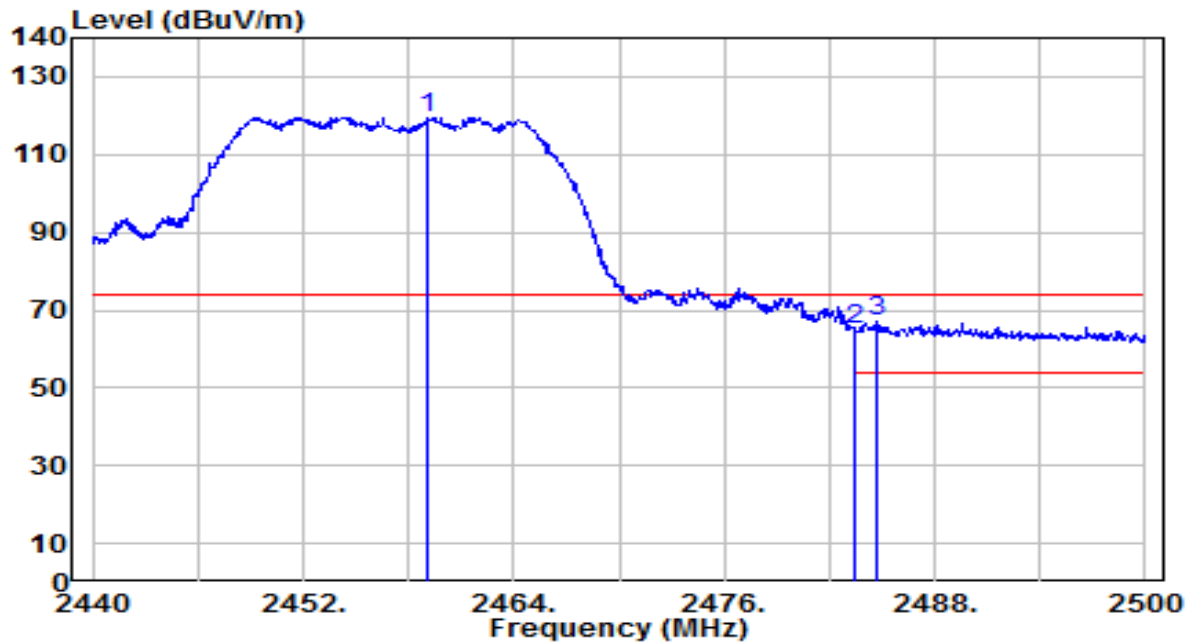


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.140	87.35	32.21	119.56	N/A	N/A	225	345	Peak
2	2483.500	32.90	32.30	65.20	-8.80	74.00	225	345	Peak
3	* 2484.640	34.63	32.30	66.94	-7.06	74.00	225	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

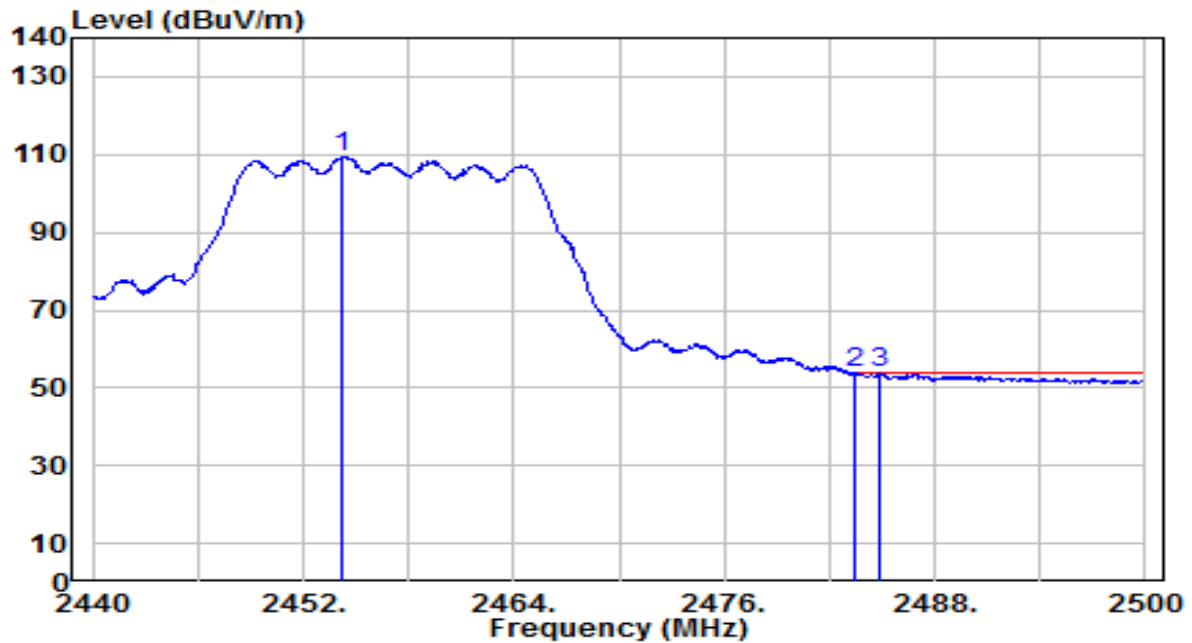


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.220	77.38	32.19	109.57	N/A	N/A	225	345	Average
2	2483.500	21.37	32.30	53.67	-0.33	54.00	225	345	Average
3	* 2484.820	21.57	32.30	53.87	-0.13	54.00	225	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

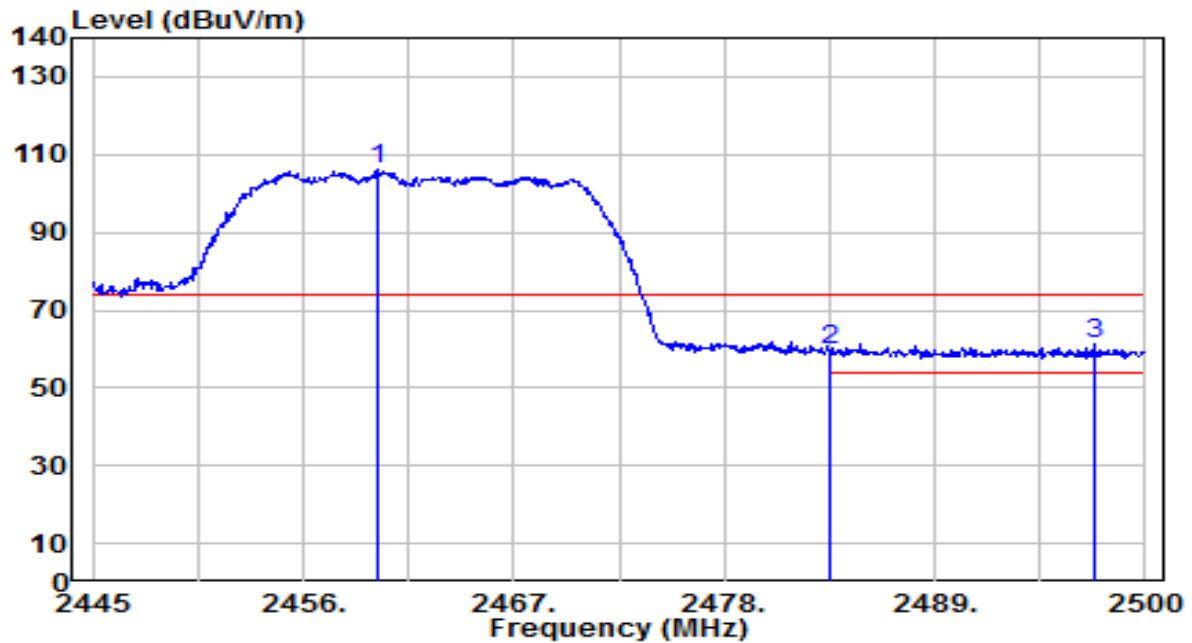


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.960	73.82	32.21	106.03	N/A	N/A	105	5	Peak
2	2483.500	27.23	32.30	59.53	-14.47	74.00	105	5	Peak
3	* 2497.305	28.90	32.35	61.25	-12.75	74.00	105	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

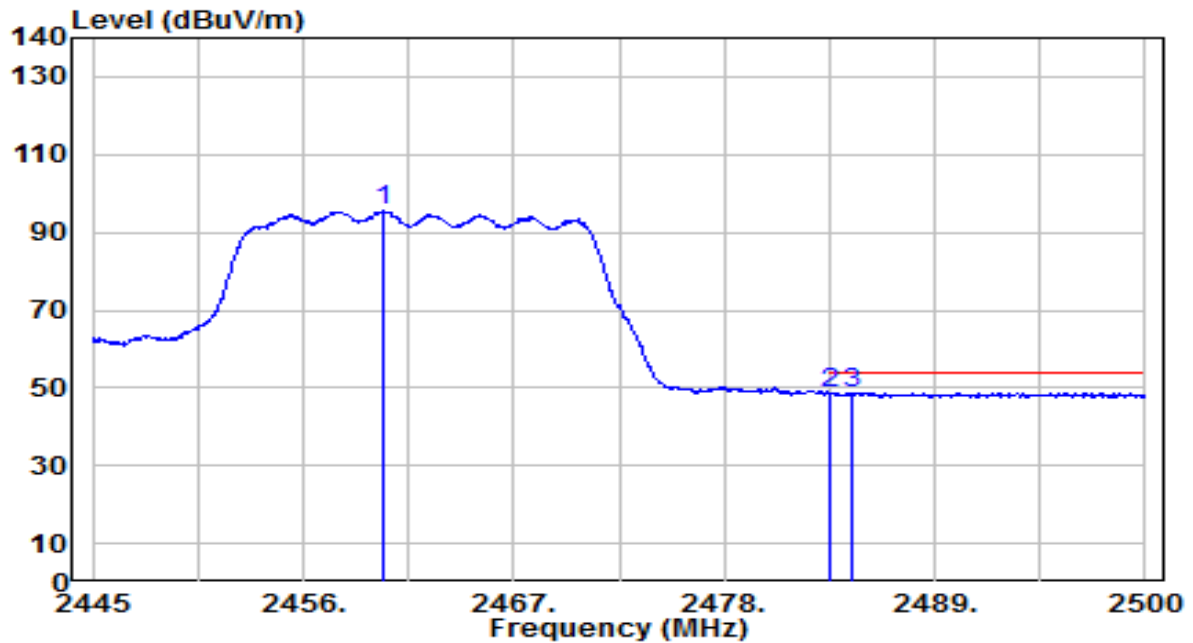


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.125	63.16	32.21	95.37	N/A	N/A	105	5	Average
2	*	2483.500	16.48	32.30	48.78	-5.22	54.00	105	5	Average
3		2484.655	16.43	32.30	48.74	-5.26	54.00	105	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

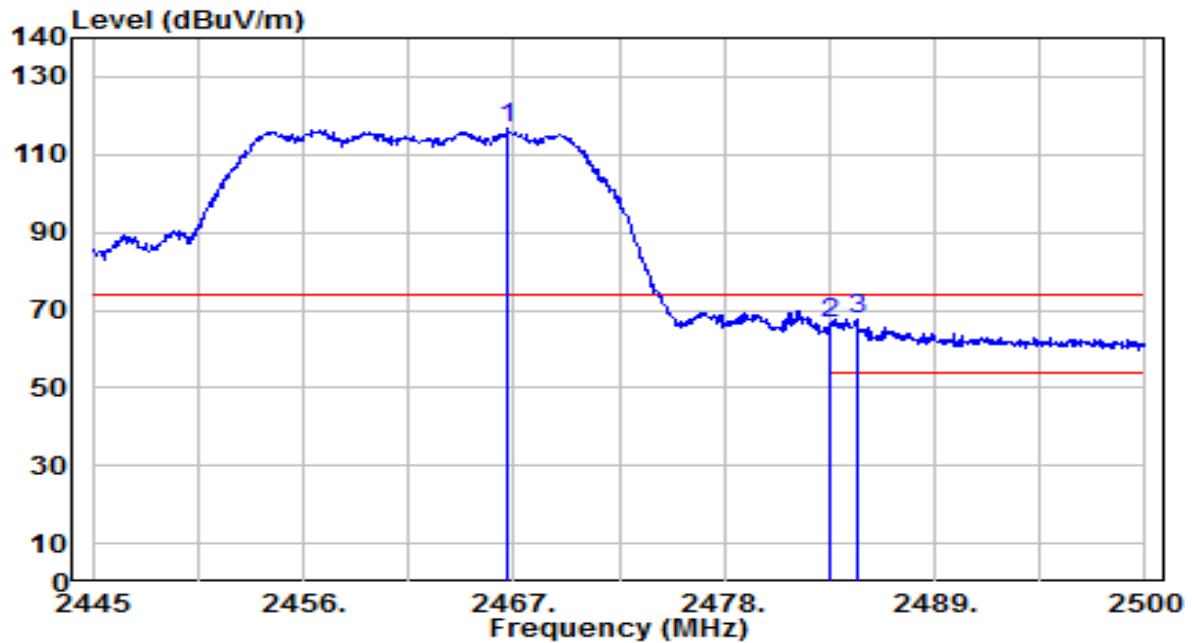


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.670	84.33	32.24	116.57	N/A	N/A	225	345	Peak
2	2483.500	34.06	32.30	66.36	-7.64	74.00	225	345	Peak
3	* 2484.930	35.10	32.30	67.40	-6.60	74.00	225	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

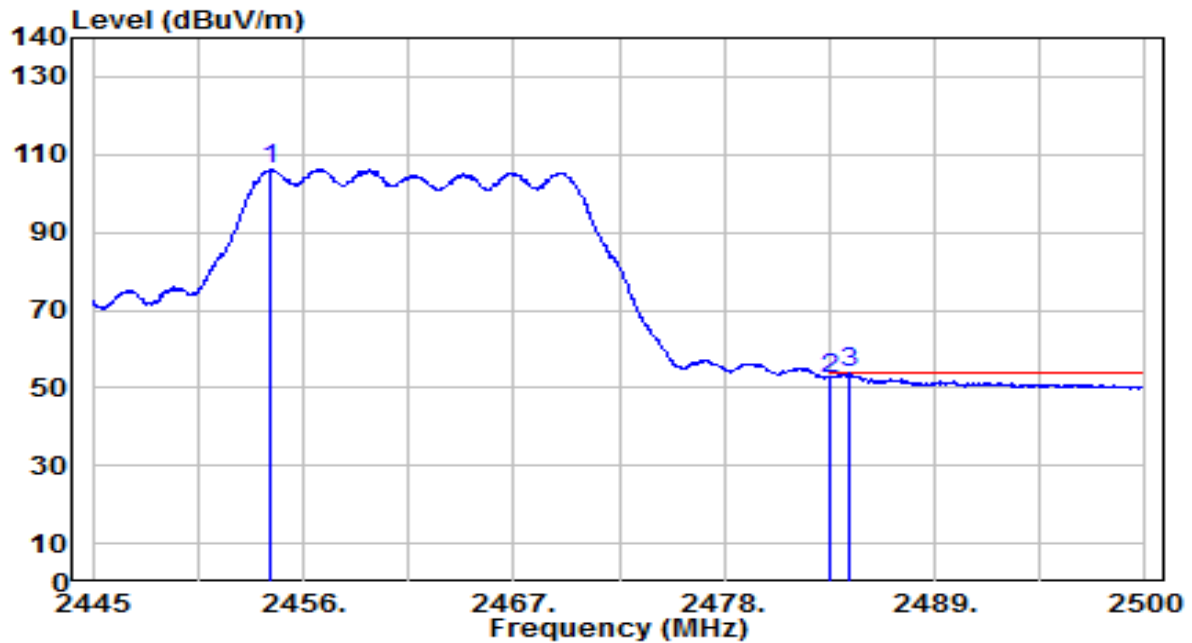


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.295	74.15	32.19	106.33	N/A	N/A	225	345	Average
2		2483.500	20.03	32.30	52.32	-1.68	54.00	225	345	Average
3	*	2484.545	21.59	32.30	53.90	-0.10	54.00	225	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

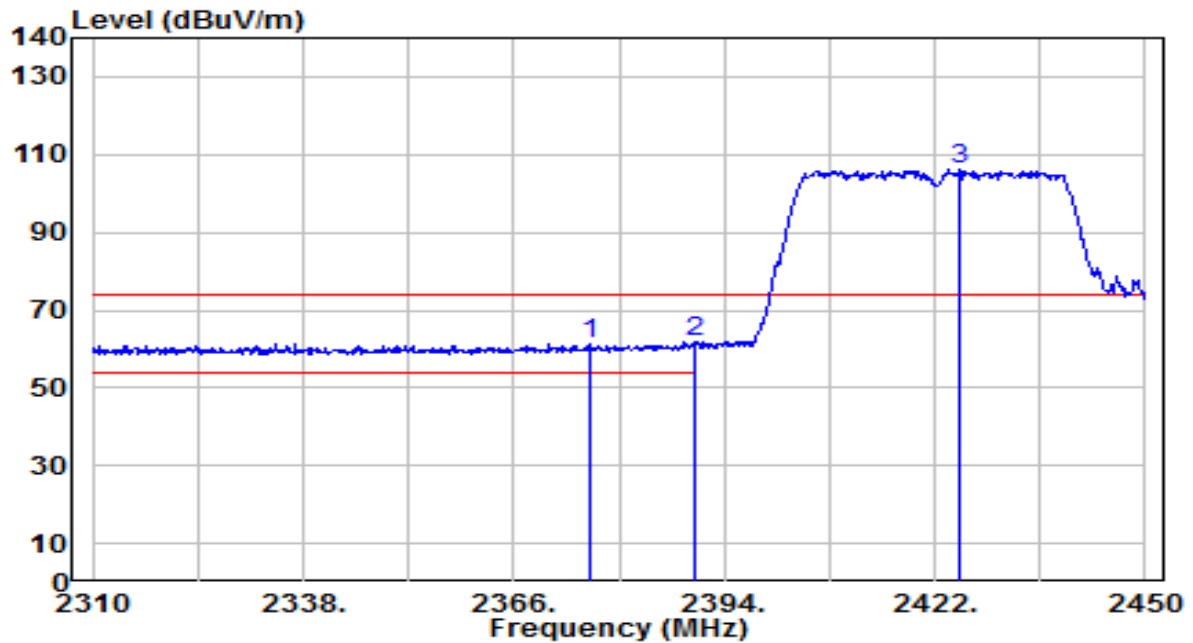


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2376.080	29.37	31.90	61.26	-12.74	74.00	180	30	Peak
2	*	2390.000	29.88	31.95	61.83	-12.17	74.00	180	30	Peak
3		2425.220	73.97	32.08	106.05	N/A	N/A	180	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

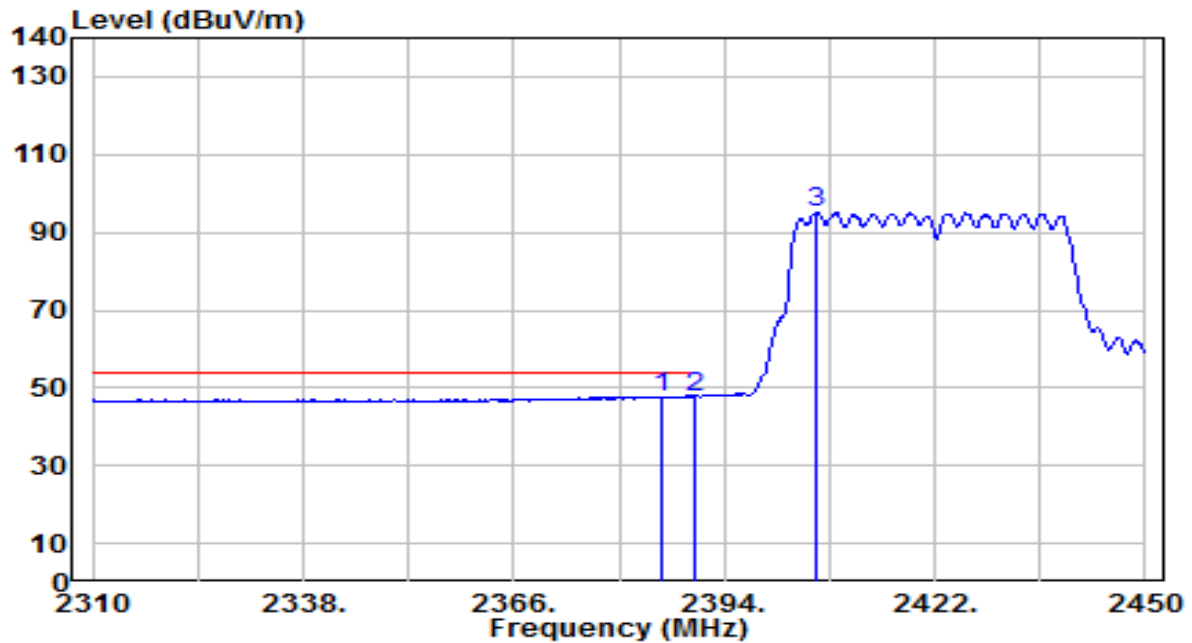


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.600	15.85	31.93	47.78	-6.22	54.00	180	30	Average
2		2390.000	15.79	31.95	47.74	-6.26	54.00	180	30	Average
3		2406.180	63.08	32.01	95.09	N/A	N/A	180	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

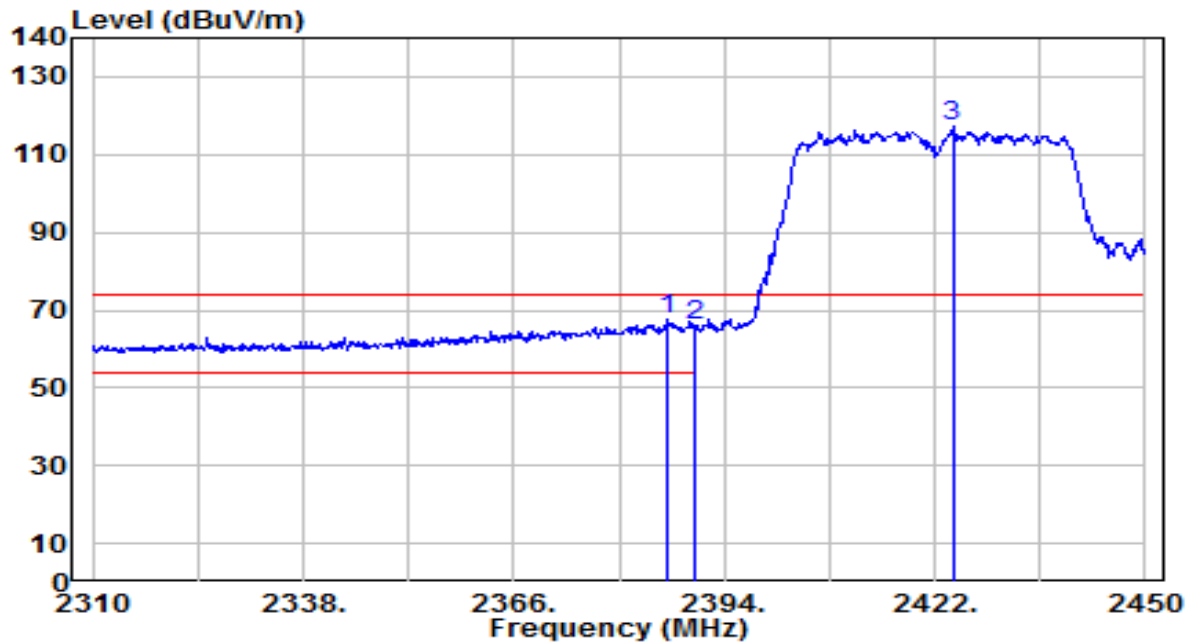


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.580	35.73	31.94	67.67	-6.33	74.00	190	355	Peak
2		2390.000	34.08	31.95	66.03	-7.97	74.00	190	355	Peak
3		2424.380	85.08	32.08	117.15	N/A	N/A	190	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

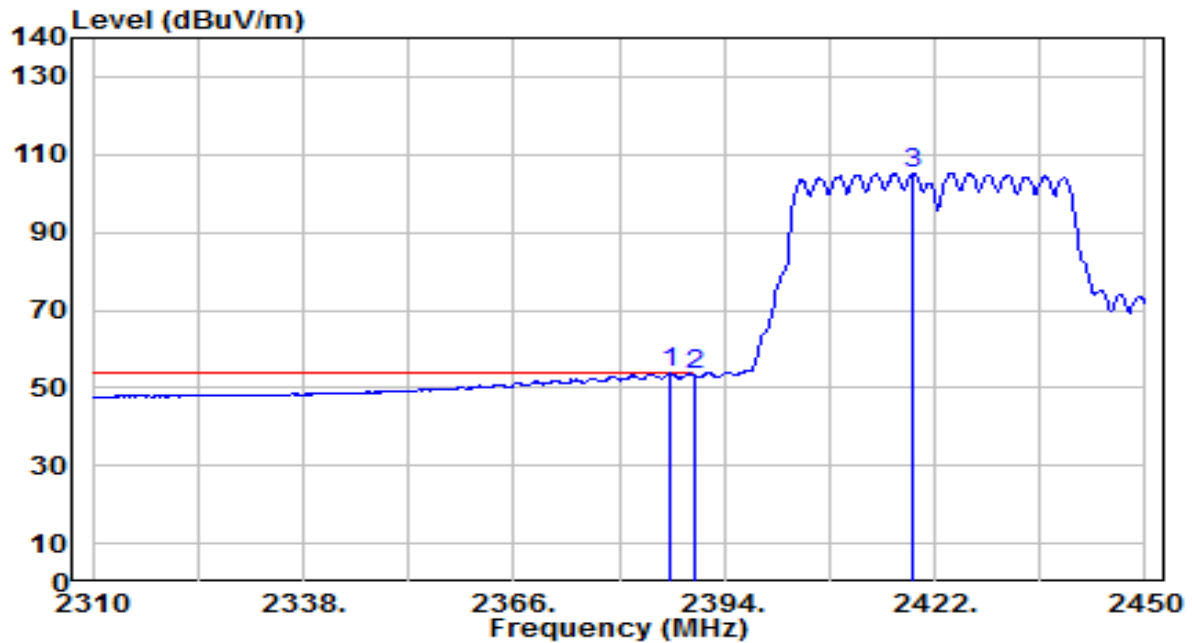


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.720	21.79	31.94	53.73	-0.27	54.00	190	355	Average
2		2390.000	21.40	31.95	53.35	-0.65	54.00	190	355	Average
3		2419.200	73.19	32.06	105.25	N/A	N/A	190	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

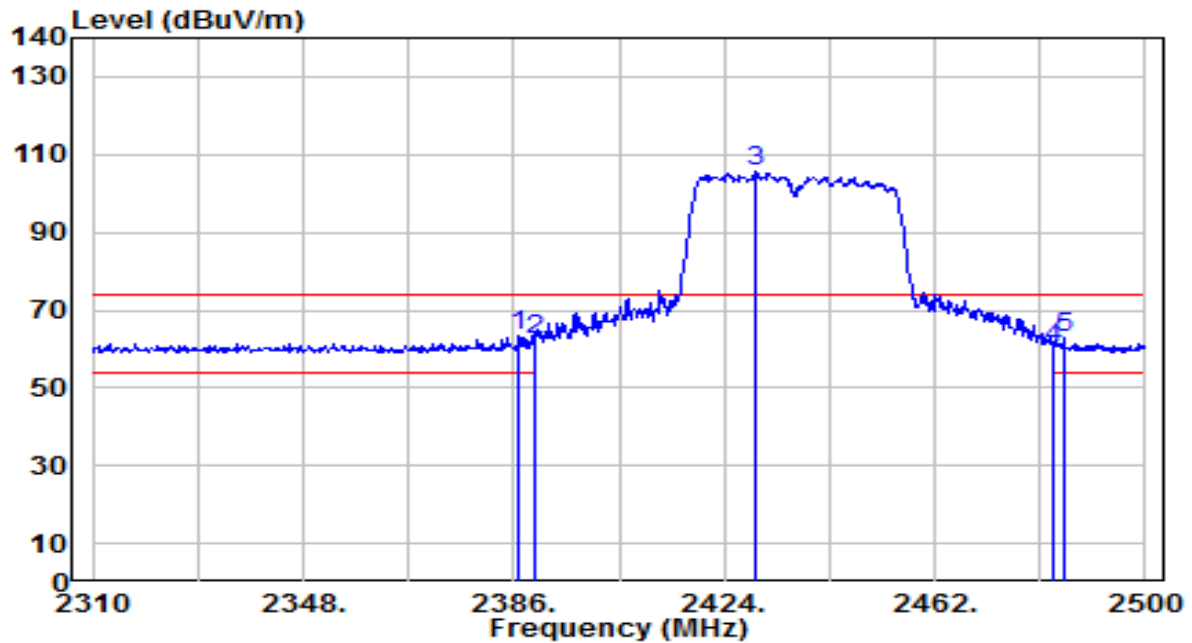


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.950	31.59	31.94	63.53	-10.47	74.00	200	270	Peak
2		2390.000	30.48	31.95	62.43	-11.57	74.00	200	270	Peak
3		2429.700	73.54	32.10	105.64	N/A	N/A	200	270	Peak
4		2483.500	28.02	32.30	60.32	-13.68	74.00	200	270	Peak
5		2485.370	30.67	32.31	62.97	-11.03	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

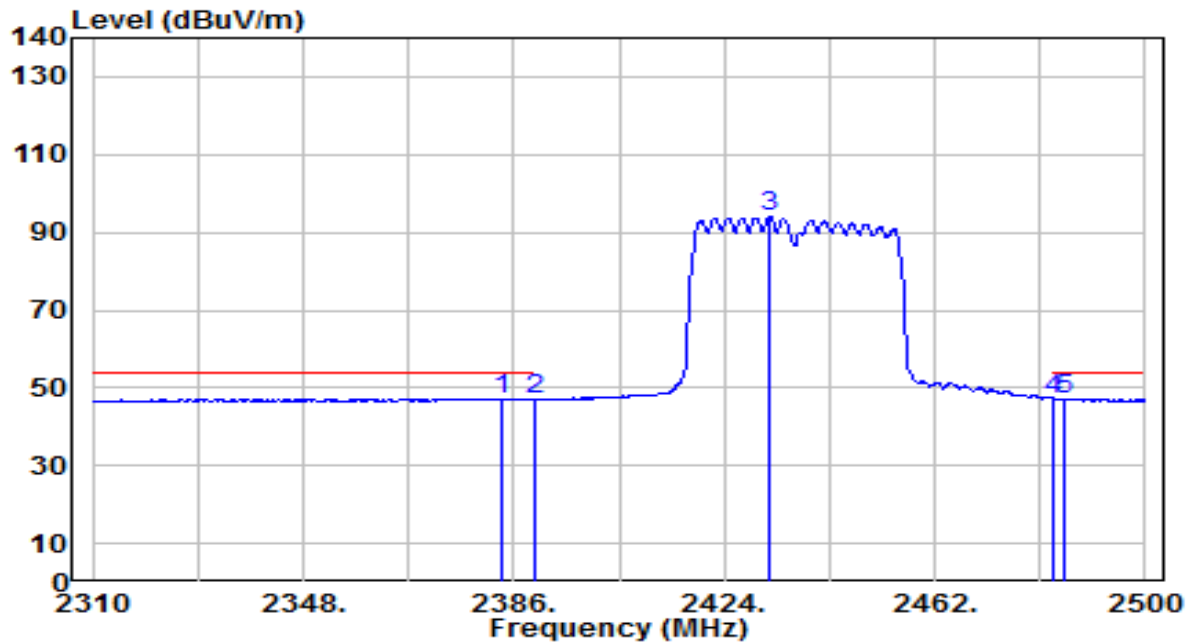


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.910	15.30	31.93	47.22	-6.78	54.00	200	270	Average
2	2390.000	15.27	31.95	47.22	-6.78	54.00	200	270	Average
3	2432.360	61.93	32.11	94.04	N/A	N/A	200	270	Average
4	2483.500	14.90	32.30	47.19	-6.81	54.00	200	270	Average
5	* 2485.180	14.96	32.30	47.26	-6.74	54.00	200	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

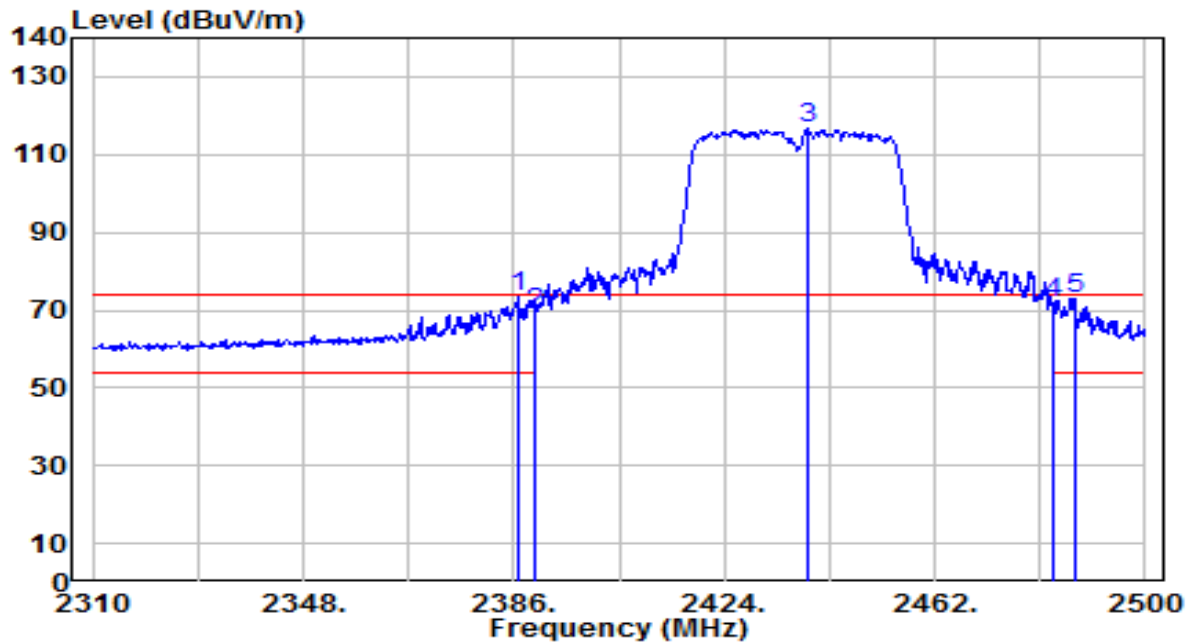


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.760	41.53	31.94	73.46	-0.54	74.00	210	360	Peak
2		2390.000	37.39	31.95	69.34	-4.66	74.00	210	360	Peak
3		2439.200	84.45	32.13	116.58	N/A	N/A	210	360	Peak
4		2483.500	39.66	32.30	71.96	-2.04	74.00	210	360	Peak
5		2487.270	40.42	32.31	72.74	-1.26	74.00	210	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

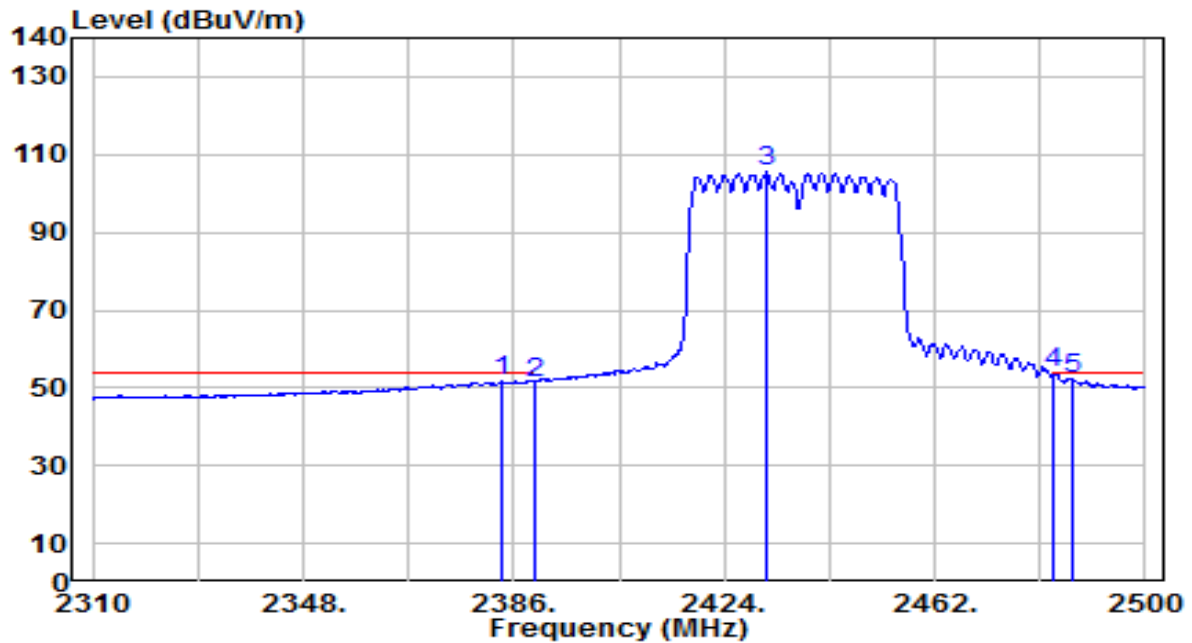


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2383.720	19.65	31.93	51.58	-2.42	54.00	210	360	Average
2		2390.000	19.44	31.95	51.39	-2.61	54.00	210	360	Average
3		2431.600	73.57	32.10	105.68	N/A	N/A	210	360	Average
4	*	2483.500	21.47	32.30	53.76	-0.24	54.00	210	360	Average
5		2486.700	20.19	32.31	52.50	-1.50	54.00	210	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

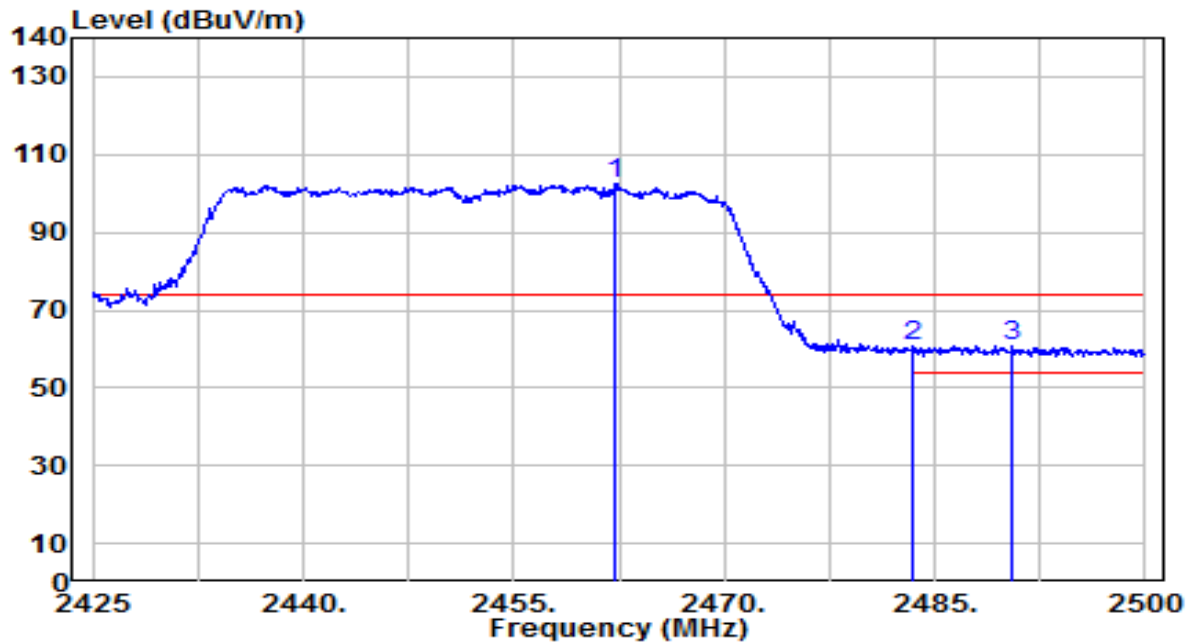


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.275	70.31	32.22	102.53	N/A	N/A	105	5	Peak
2	2483.500	28.33	32.30	60.63	-13.37	74.00	105	5	Peak
3	* 2490.550	28.54	32.32	60.86	-13.14	74.00	105	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

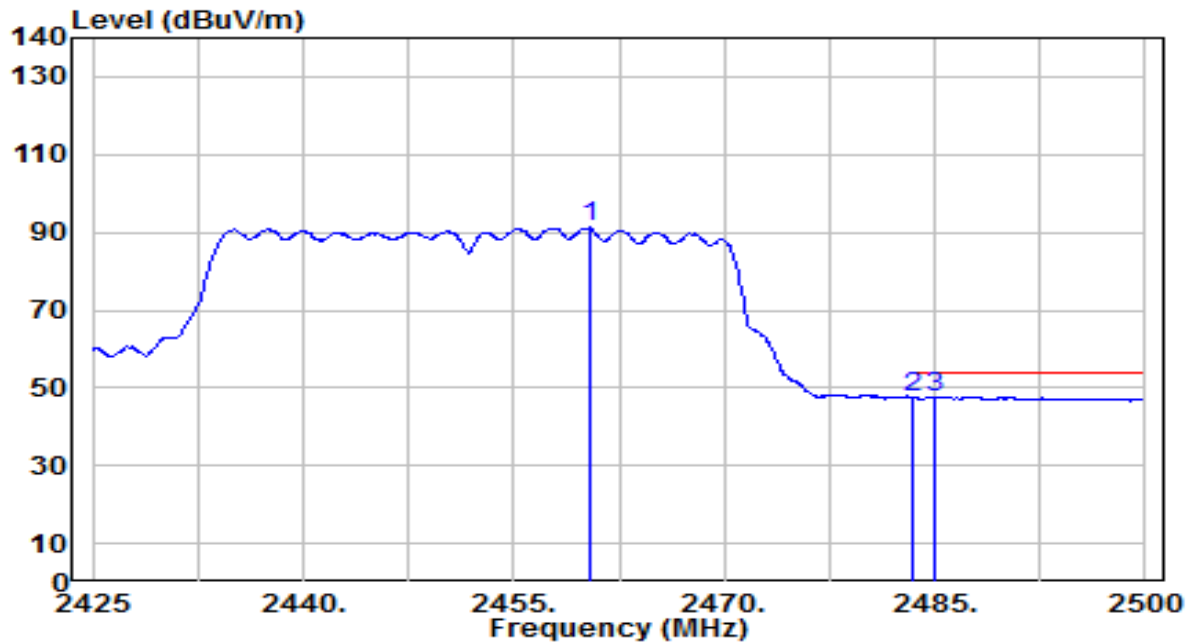


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.400	59.06	32.21	91.27	N/A	N/A	105	5	Average
2	2483.500	15.20	32.30	47.50	-6.50	54.00	105	5	Average
3	* 2485.075	15.50	32.30	47.81	-6.19	54.00	105	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

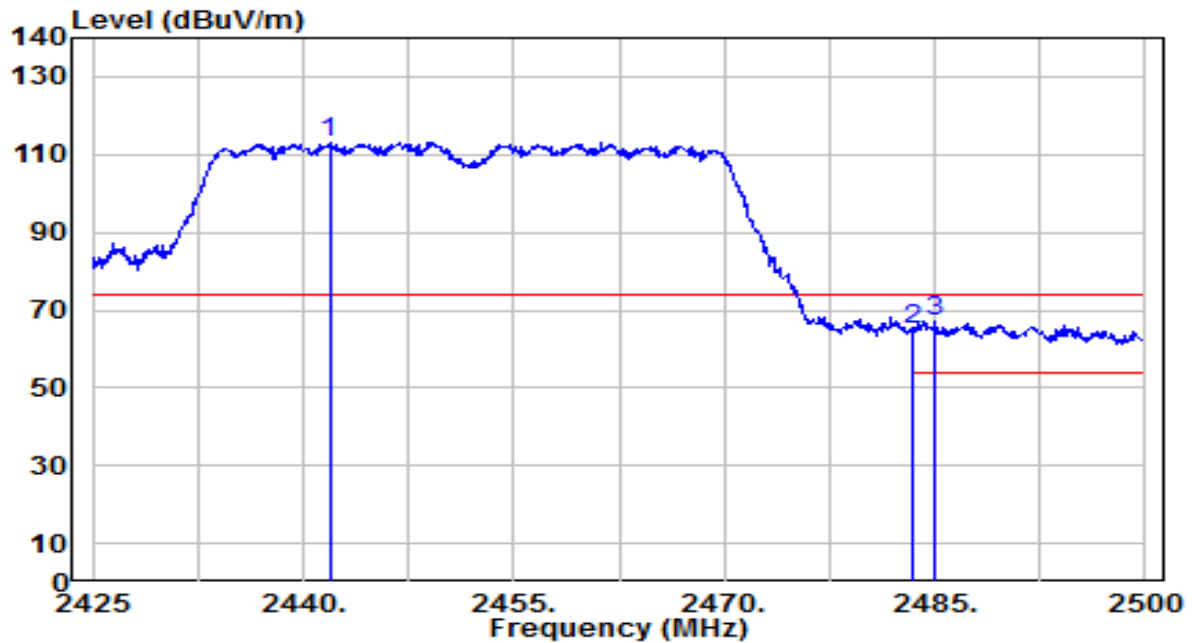


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2441.875	80.91	32.14	113.05	N/A	N/A	225	345	Peak
2	2483.500	32.69	32.30	64.99	-9.01	74.00	225	345	Peak
3	* 2485.075	34.90	32.30	67.20	-6.80	74.00	225	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

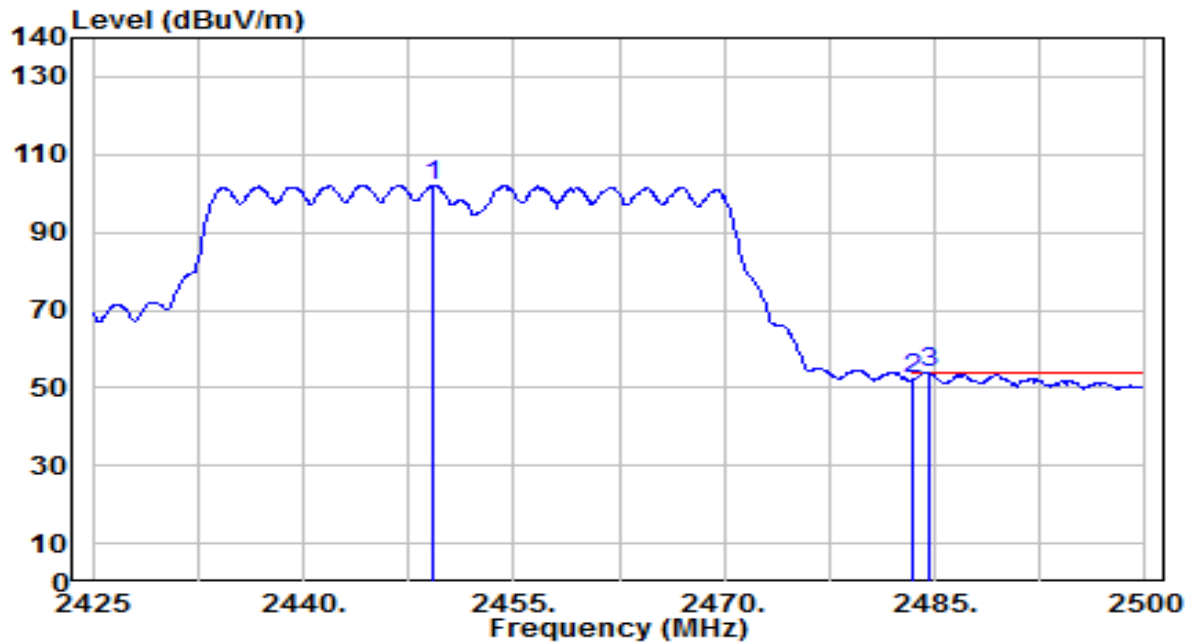


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.300	70.01	32.17	102.18	N/A	N/A	225	345	Average
2	2483.500	20.02	32.30	52.32	-1.68	54.00	225	345	Average
3	* 2484.550	21.50	32.30	53.80	-0.20	54.00	225	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

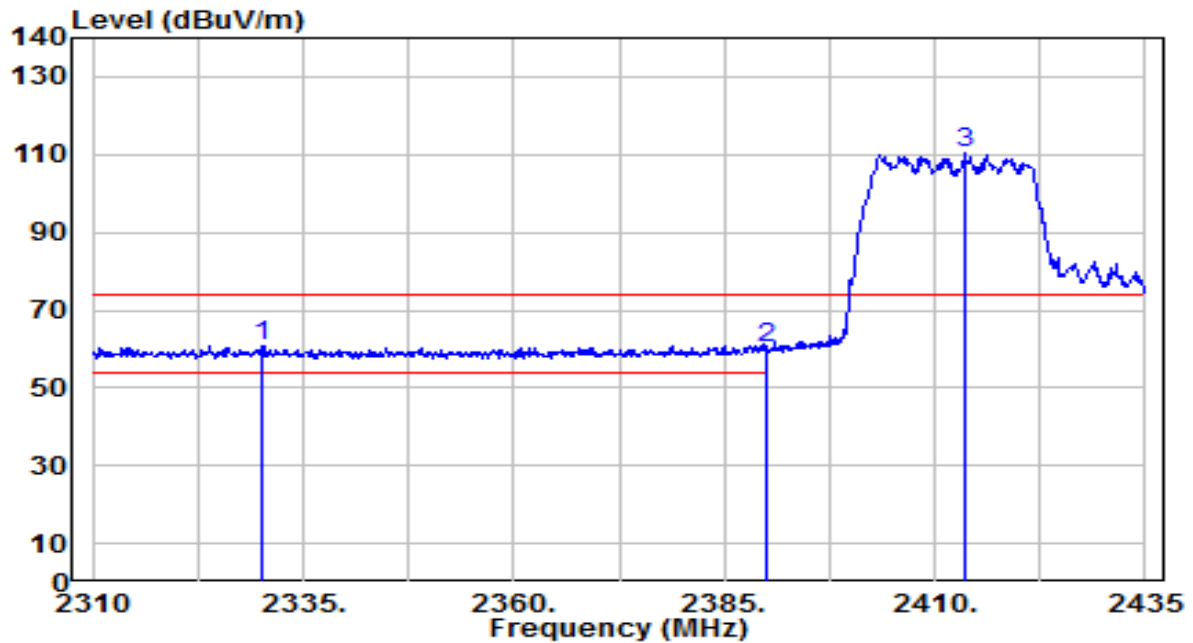


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2330.000	28.99	31.72	60.72	-13.28	74.00	180	30	Peak
2		2390.000	28.13	31.95	60.08	-13.92	74.00	180	30	Peak
3		2413.625	78.62	32.04	110.66	N/A	N/A	180	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

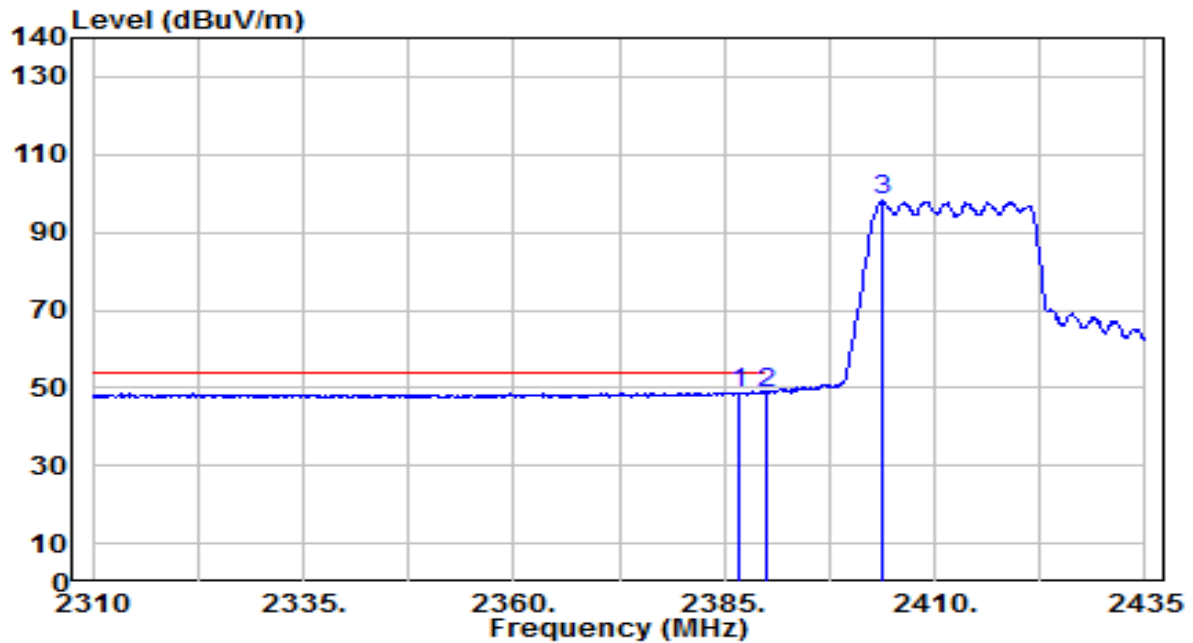


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.750	16.90	31.94	48.84	-5.16	54.00	180	30	Average
2		2390.000	16.74	31.95	48.69	-5.31	54.00	180	30	Average
3		2403.875	66.06	32.00	98.06	N/A	N/A	180	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

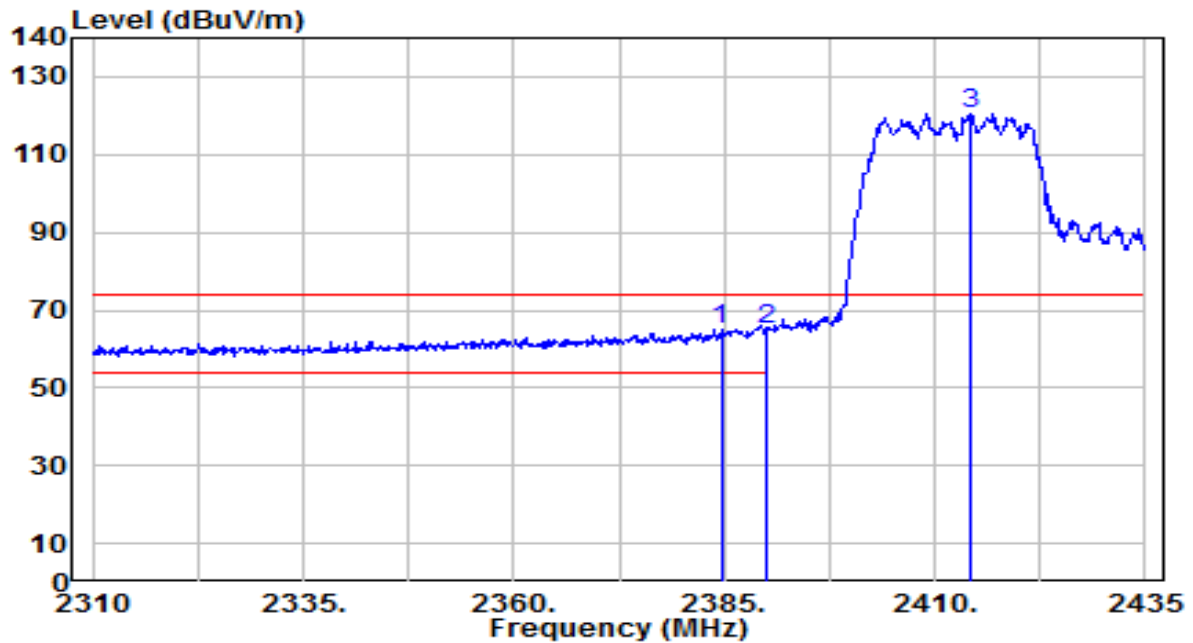


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2384.625	32.92	31.93	64.85	-9.15	74.00	165	360	Peak
2	*	2390.000	33.17	31.95	65.12	-8.88	74.00	165	360	Peak
3		2414.250	88.65	32.04	120.69	N/A	N/A	165	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

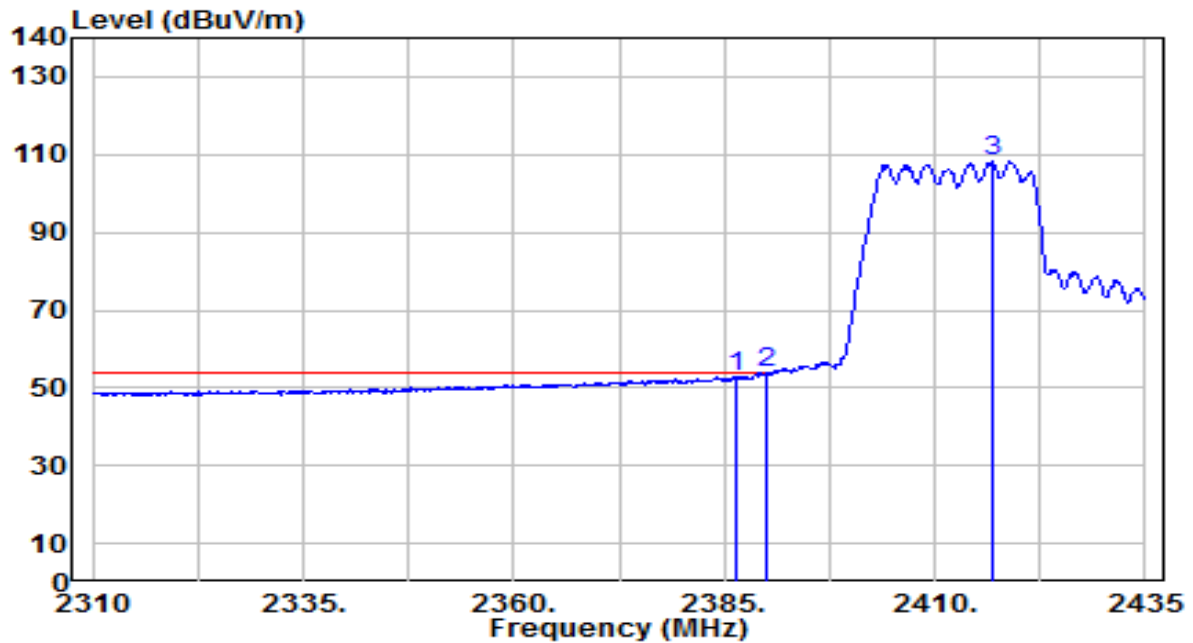


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.500	21.00	31.94	52.93	-1.07	54.00	165	360	Average
2	*	2390.000	21.76	31.95	53.71	-0.29	54.00	165	360	Average
3		2416.750	76.11	32.05	108.15	N/A	N/A	165	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

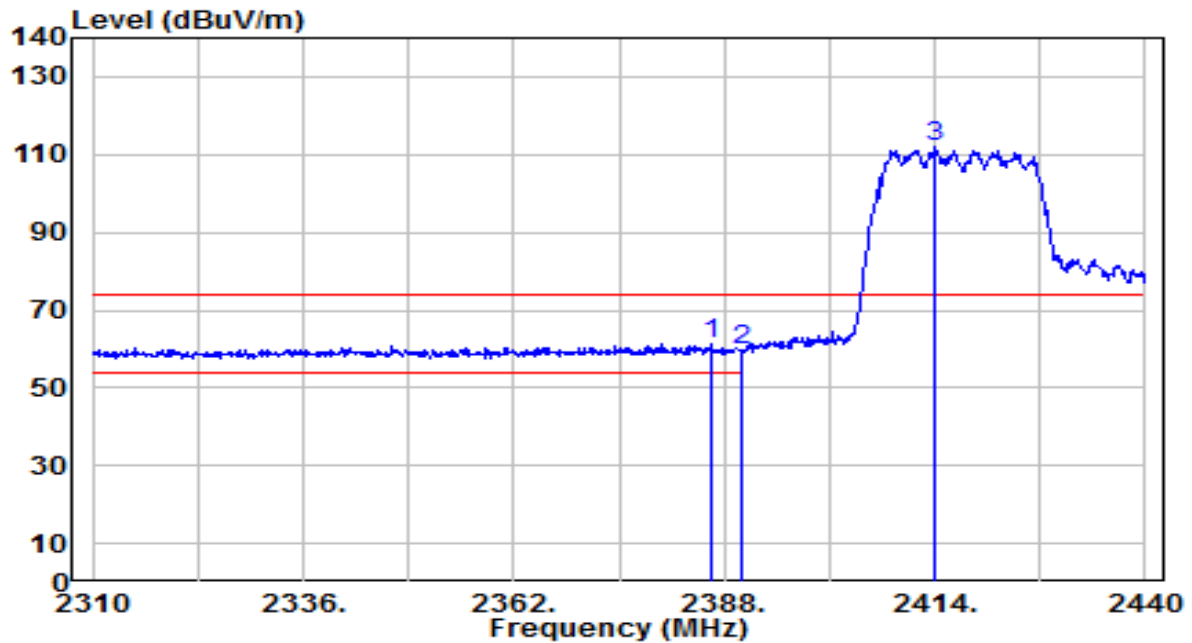


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.570	29.26	31.94	61.20	-12.80	74.00	150	320	Peak
2	2390.000	27.74	31.95	59.69	-14.31	74.00	150	320	Peak
3	* 2414.130	79.71	32.04	111.75	N/A	N/A	150	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

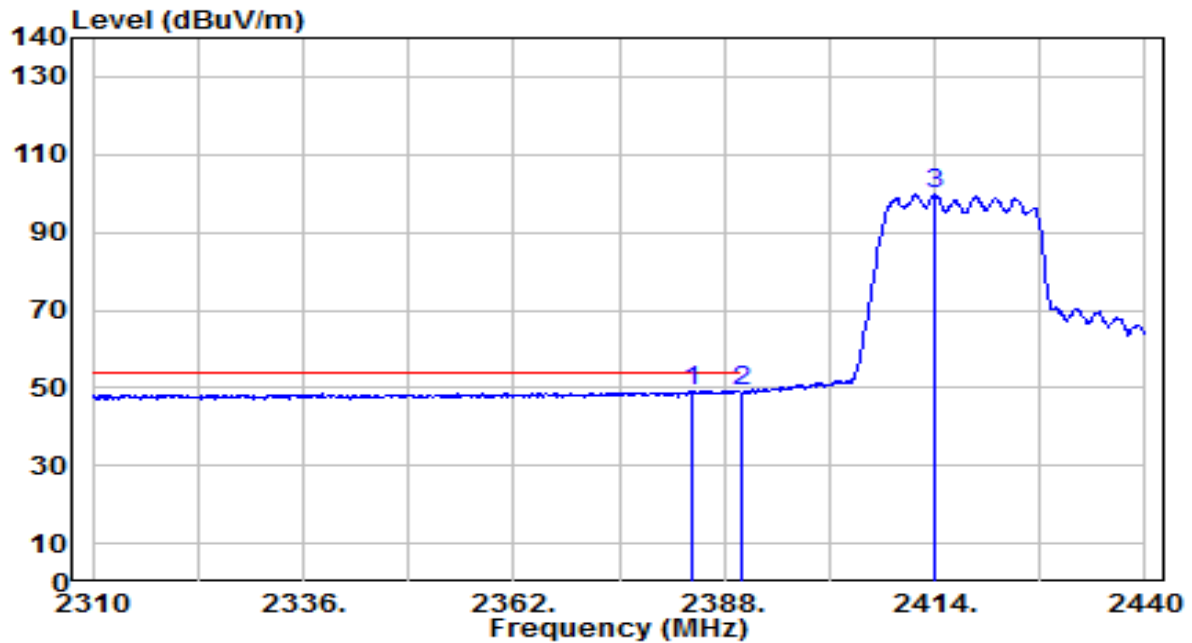


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.970	17.28	31.93	49.21	-4.79	54.00	150	320	Average
2		2390.000	16.95	31.95	48.90	-5.10	54.00	150	320	Average
3		2414.130	67.65	32.04	99.69	N/A	N/A	150	320	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

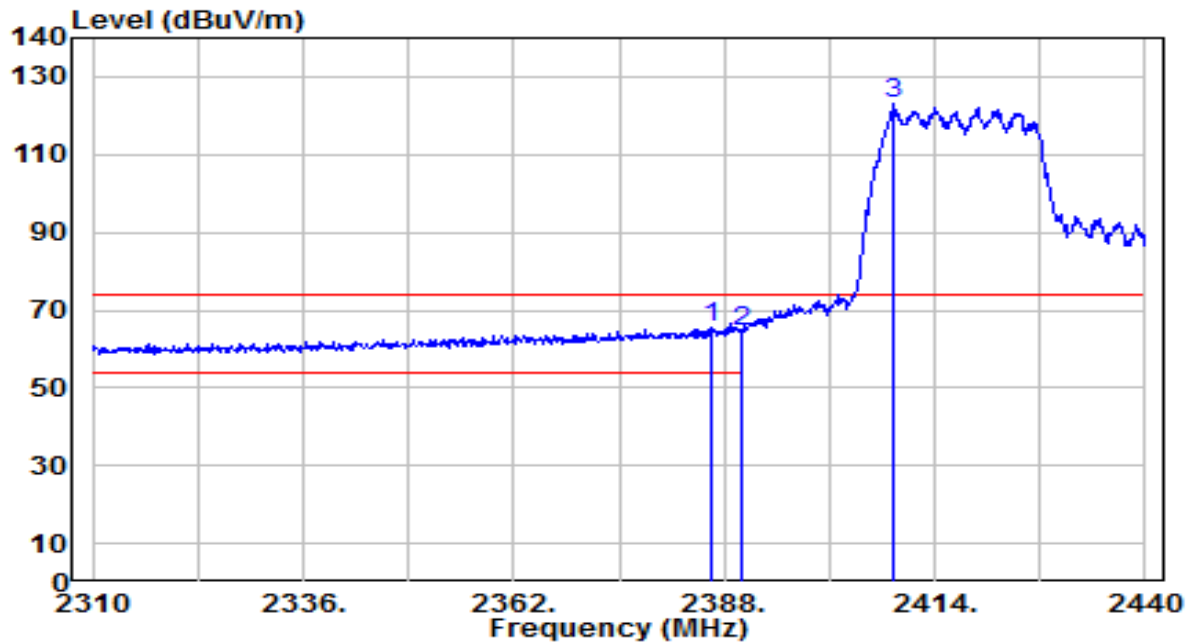


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.310	33.39	31.93	65.32	-8.68	74.00	170	355	Peak
2		2390.000	32.41	31.95	64.35	-9.65	74.00	170	355	Peak
3	*	2408.930	90.94	32.02	122.96	N/A	N/A	170	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

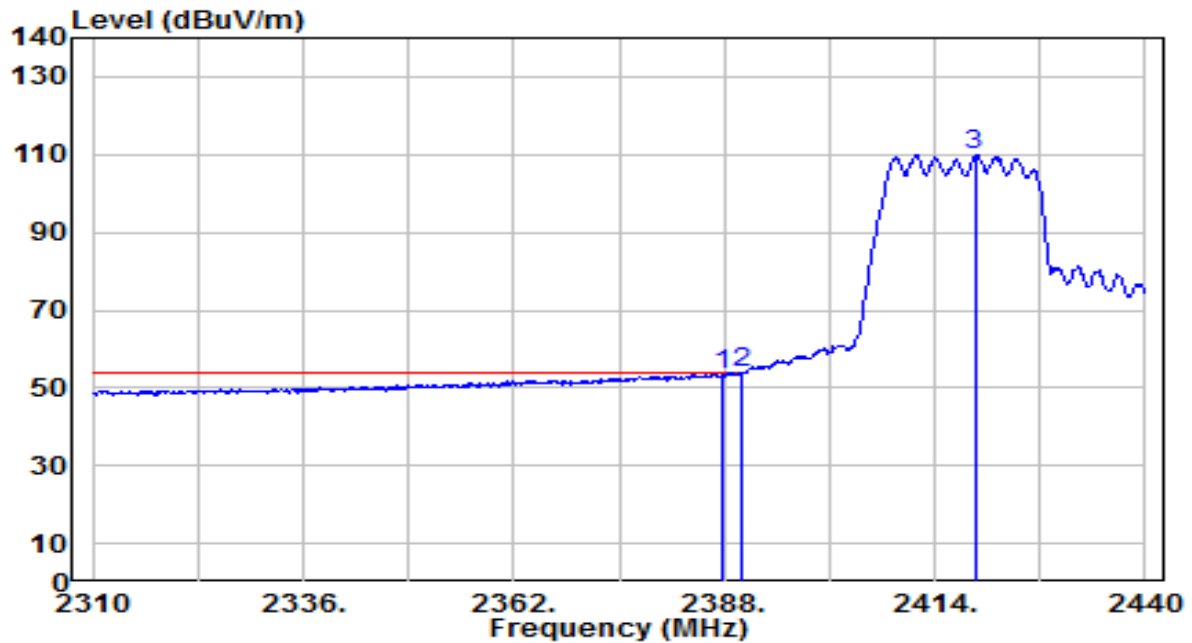


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.870	21.67	31.94	53.61	-0.39	54.00	170	355	Average
2	*	2390.000	21.77	31.95	53.72	-0.28	54.00	170	355	Average
3		2418.940	77.77	32.06	109.83	N/A	N/A	170	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

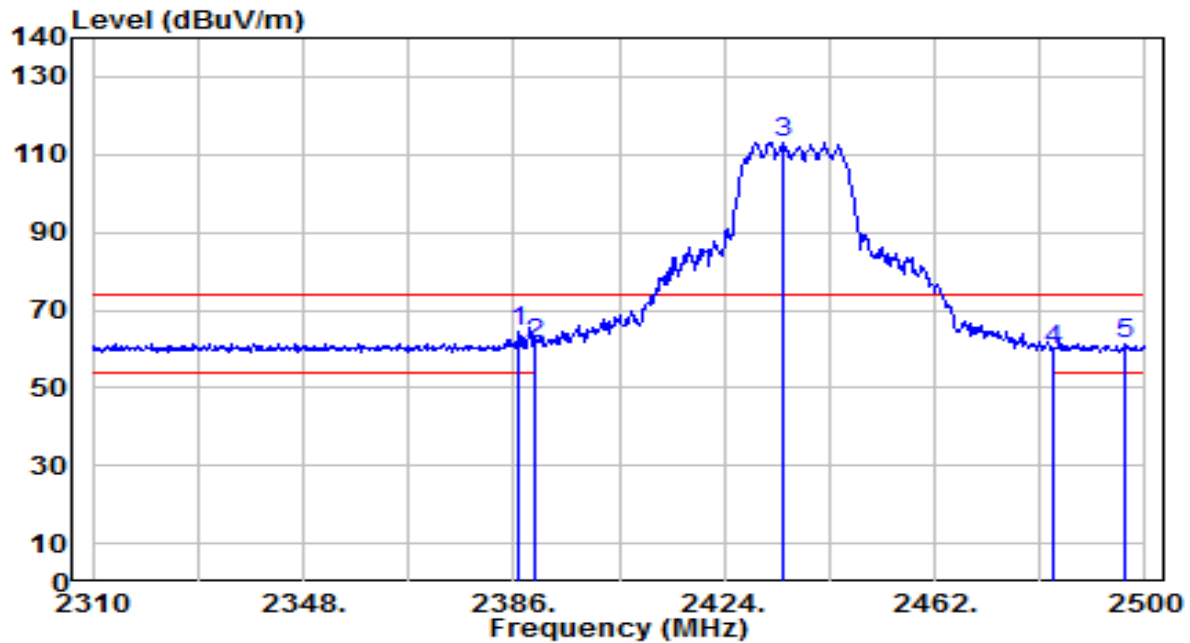


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.950	32.67	31.94	64.60	-9.40	74.00	200	270	Peak
2		2390.000	29.58	31.95	61.52	-12.48	74.00	200	270	Peak
3		2434.640	81.07	32.12	113.19	N/A	N/A	200	270	Peak
4		2483.500	27.58	32.30	59.88	-14.12	74.00	200	270	Peak
5		2496.390	28.74	32.35	61.09	-12.91	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	BBHA 9120D	Temp. / Humidity	21°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

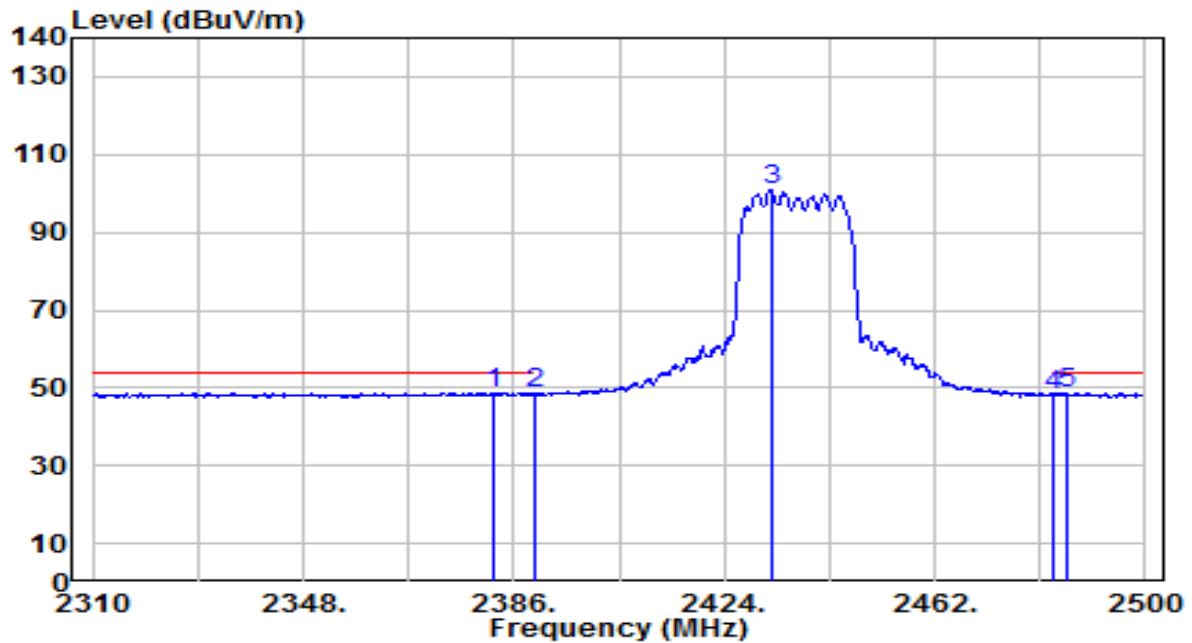

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.200	16.67	31.92	48.59	-5.41	54.00	200	270	Average
2		2390.000	16.55	31.95	48.50	-5.50	54.00	200	270	Average
3		2432.550	68.73	32.11	100.84	N/A	N/A	200	270	Average
4		2483.500	15.88	32.30	48.18	-5.82	54.00	200	270	Average
5		2486.130	16.25	32.31	48.56	-5.44	54.00	200	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.