


EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

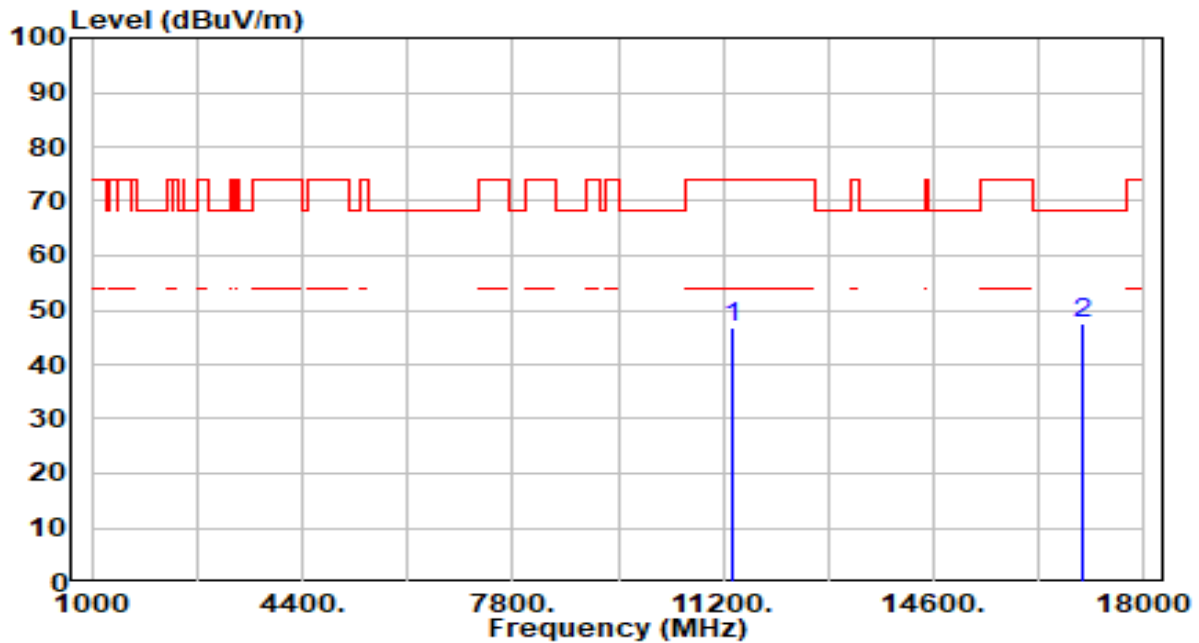


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.64	5.14	46.79	-27.21	74.00	100	166	Peak
2	*	17010.000	41.67	5.74	47.41	-20.79	68.20	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

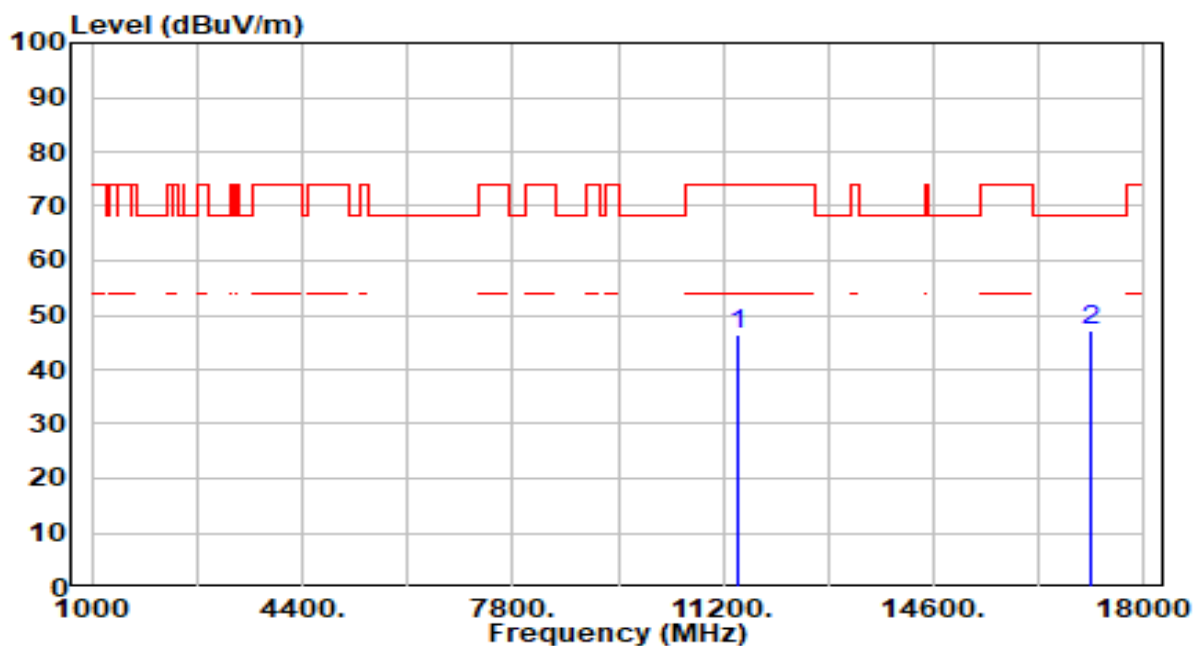


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.16	5.23	46.39	-27.61	74.00	100	264	Peak
2	*	17130.000	41.87	5.48	47.34	-20.86	68.20	100	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

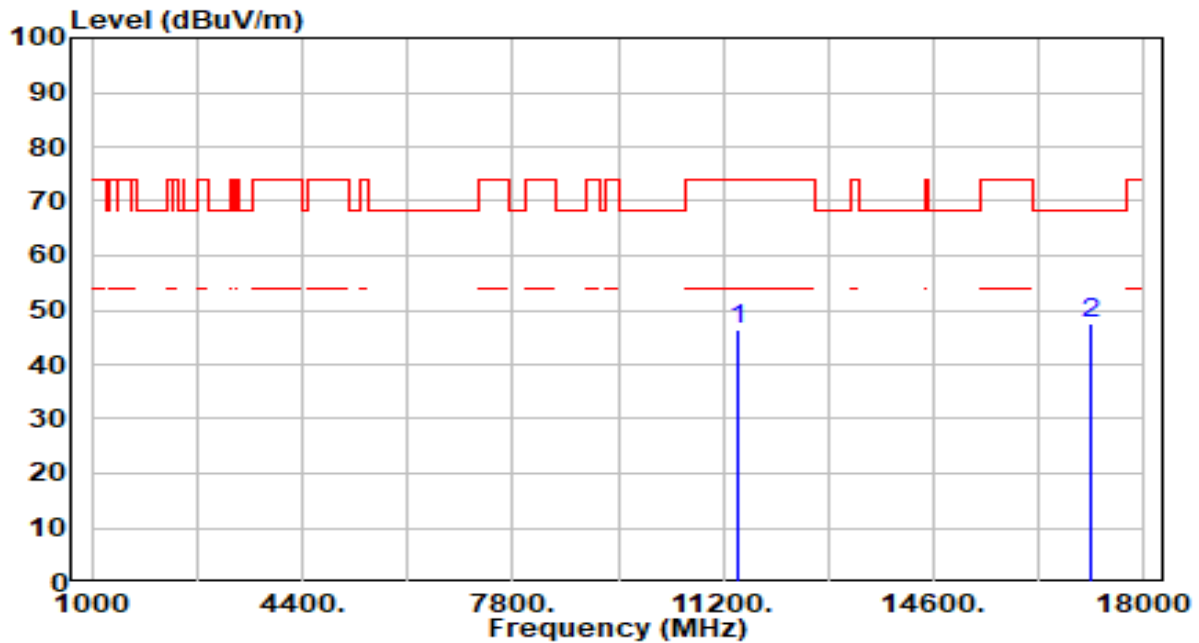


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.28	5.23	46.51	-27.49	74.00	100	103	Peak
2	*	17130.000	42.15	5.48	47.62	-20.58	68.20	100	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

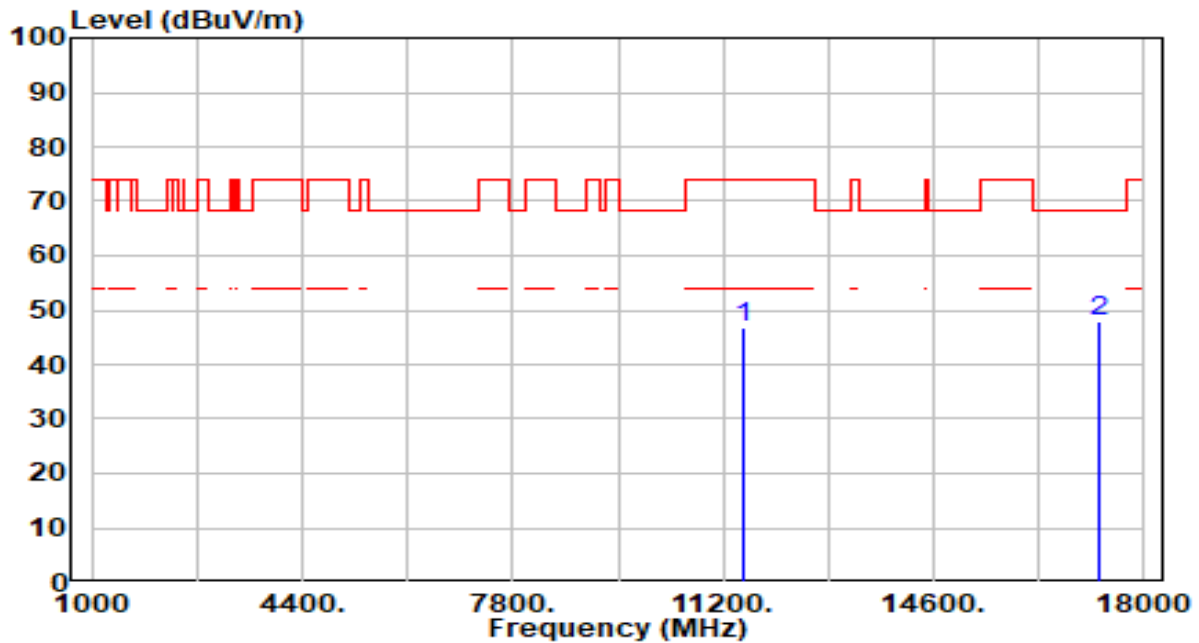


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	41.53	5.29	46.82	-27.18	74.00	100	330	Peak
2	*	17265.000	42.78	5.18	47.96	-20.24	68.20	100	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

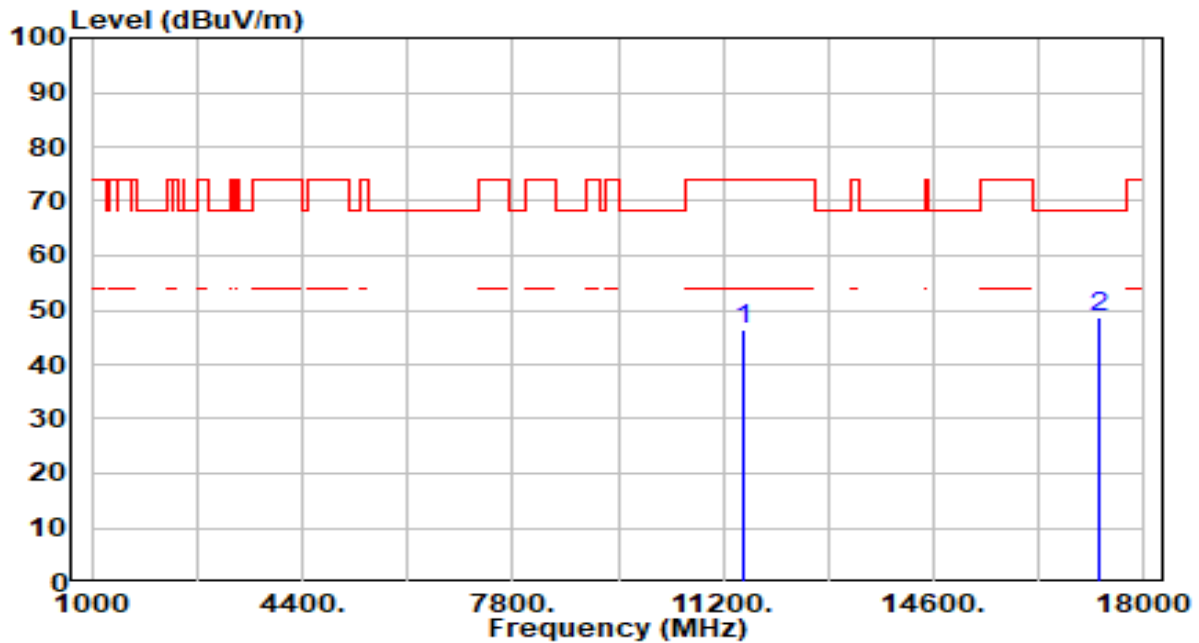


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	41.14	5.29	46.43	-27.57	74.00	100	360	Peak
2	*	17265.000	43.55	5.18	48.74	-19.46	68.20	100	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

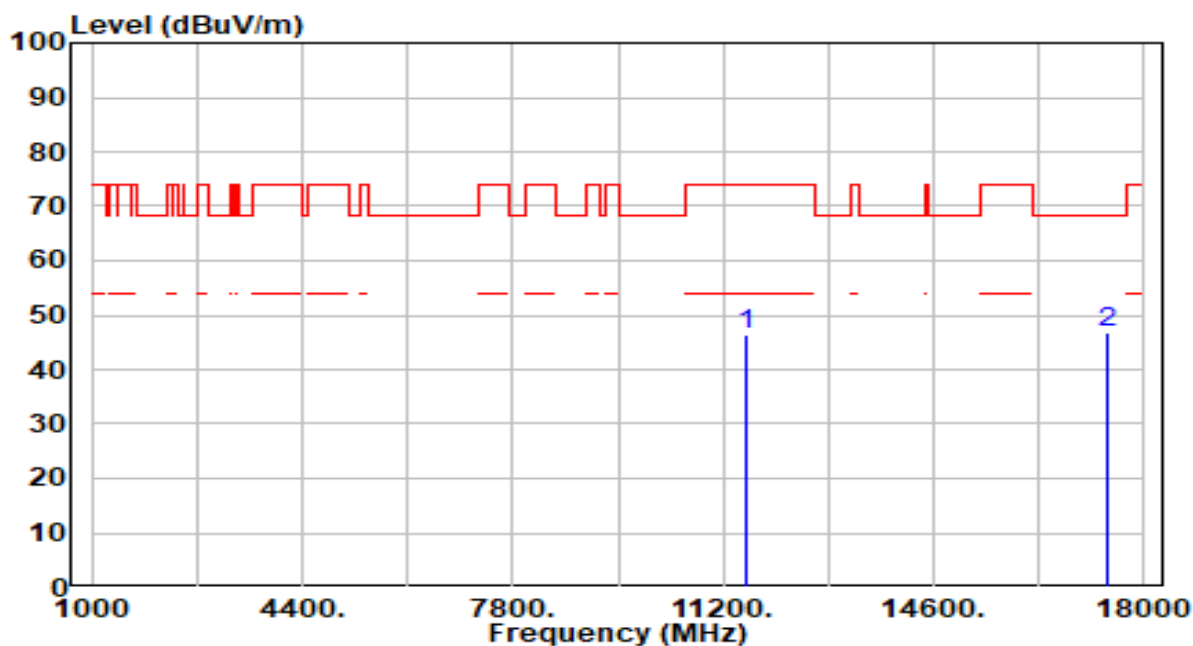


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	41.14	5.37	46.51	-27.49	74.00	100	0	Peak
2	*	17385.000	41.83	4.92	46.75	-21.45	68.20	100	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

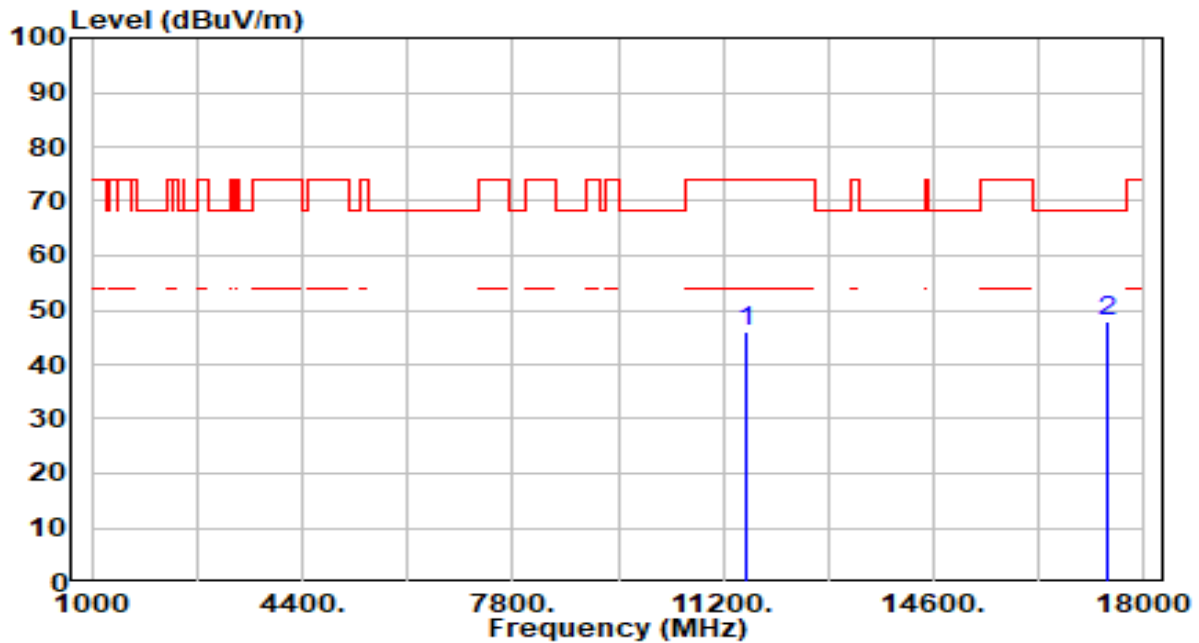


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	40.60	5.37	45.97	-28.03	74.00	100	278	Peak
2	*	17385.000	43.13	4.92	48.05	-20.15	68.20	100	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

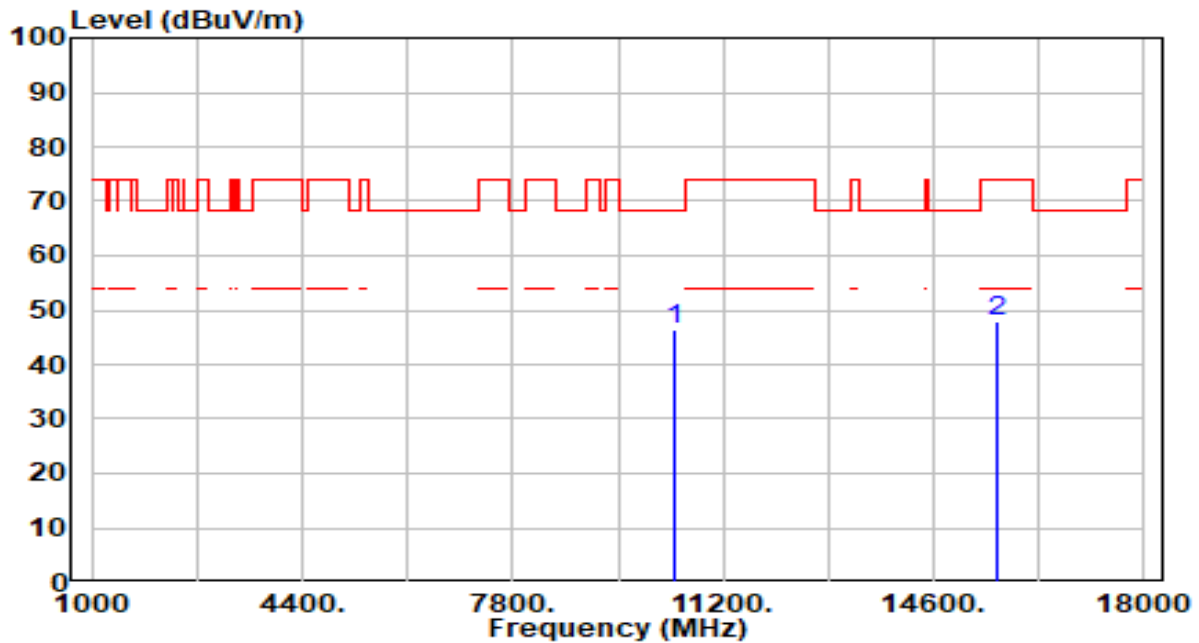


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.68	4.74	46.42	-21.78	68.20	100	206	Peak
2		15630.000	41.84	6.25	48.09	-25.91	74.00	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

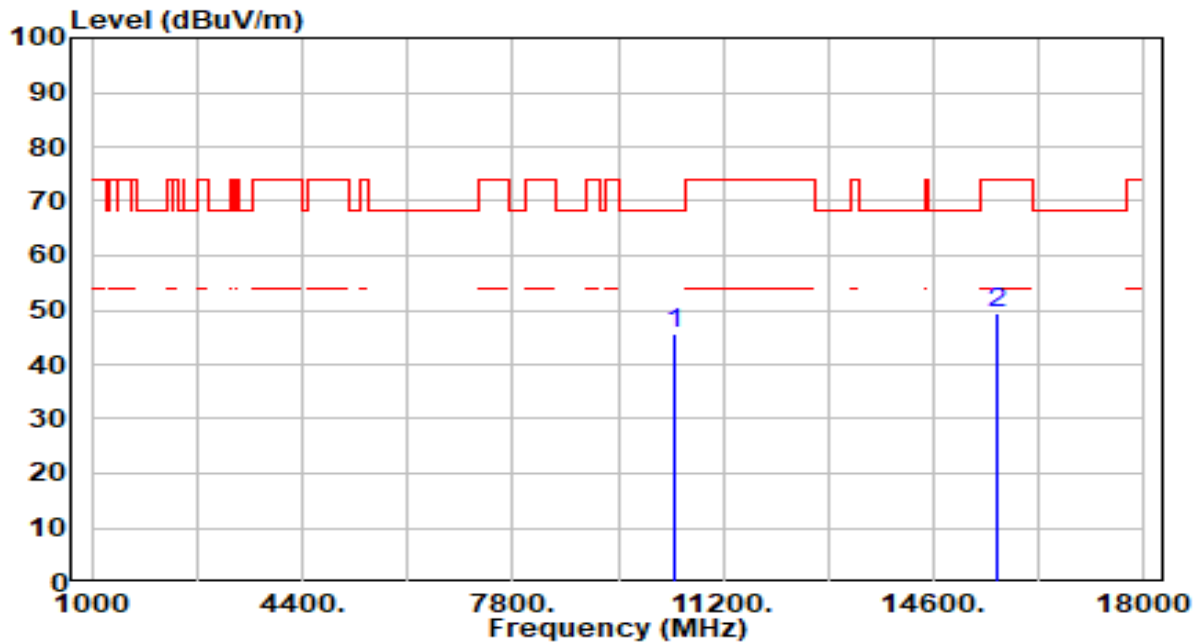


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.90	4.74	45.64	-22.56	68.20	100	323	Peak
2		15630.000	43.14	6.25	49.40	-24.60	74.00	100	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

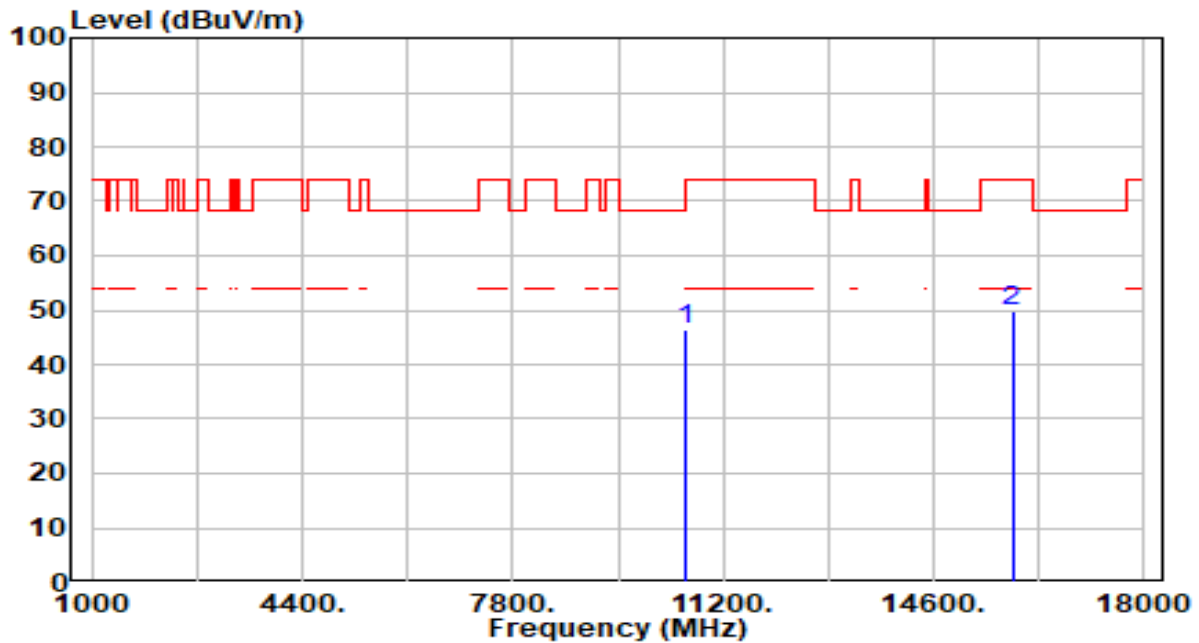


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.99	4.56	46.55	-21.65	68.20	100	178	Peak
2		15870.000	43.31	6.63	49.94	-24.06	74.00	100	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

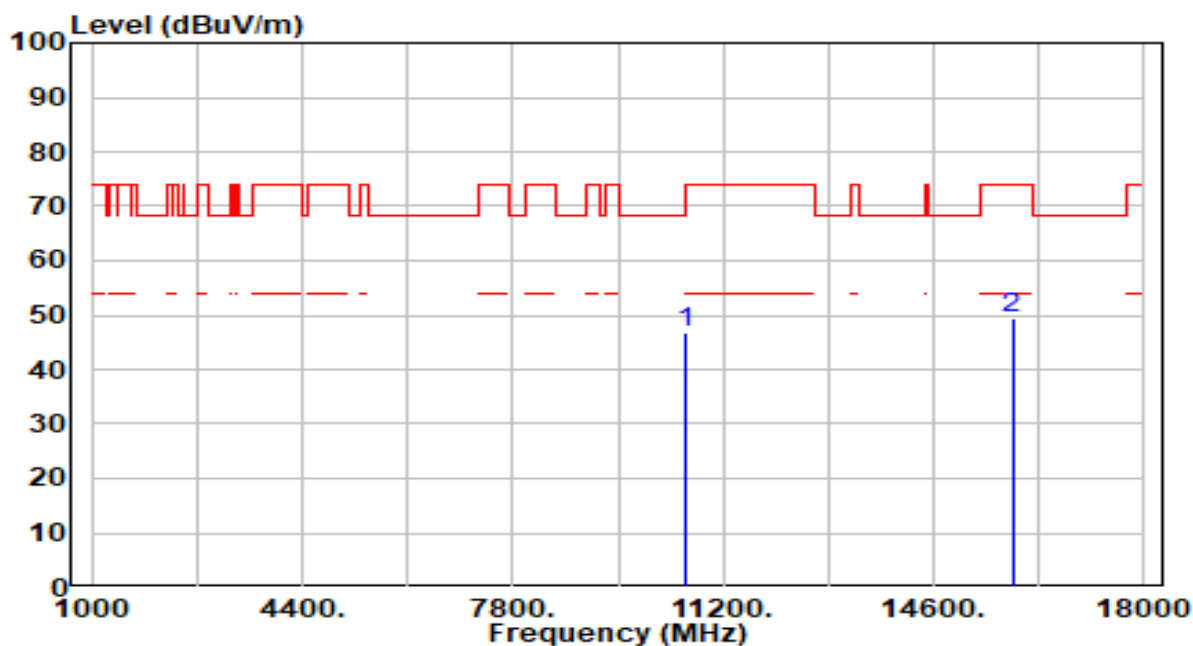


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	42.30	4.56	46.87	-21.33	68.20	100	259	Peak
2		15870.000	42.82	6.63	49.45	-24.55	74.00	100	301	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

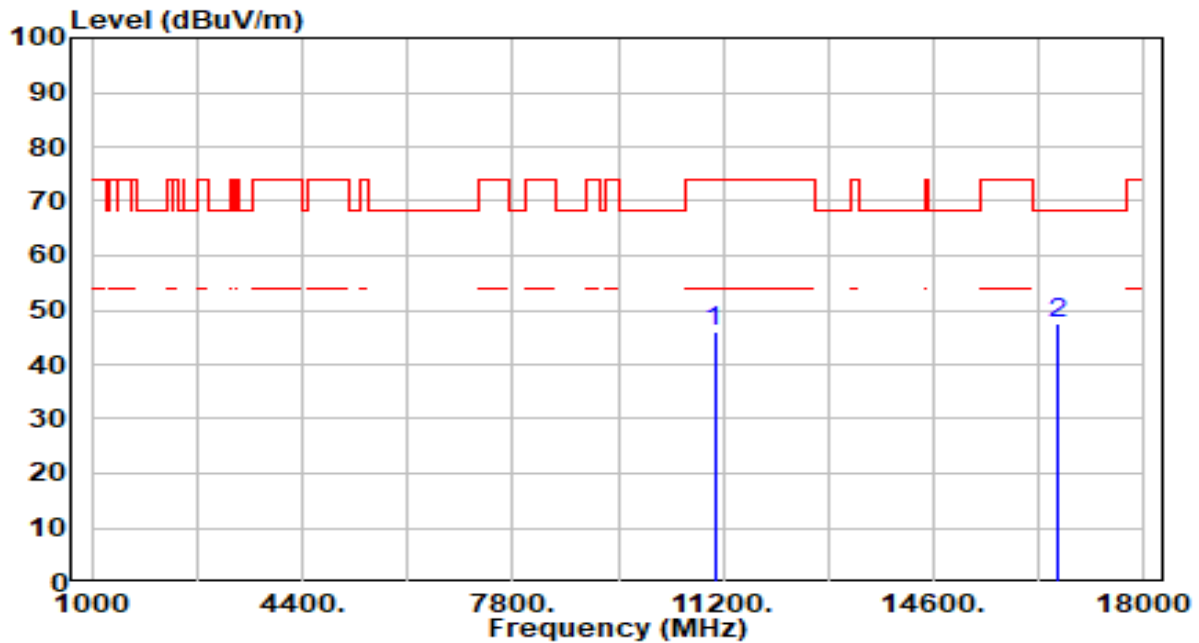


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	41.46	4.60	46.07	-27.93	74.00	100	8	Peak
2	*	16590.000	41.45	6.00	47.44	-20.76	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

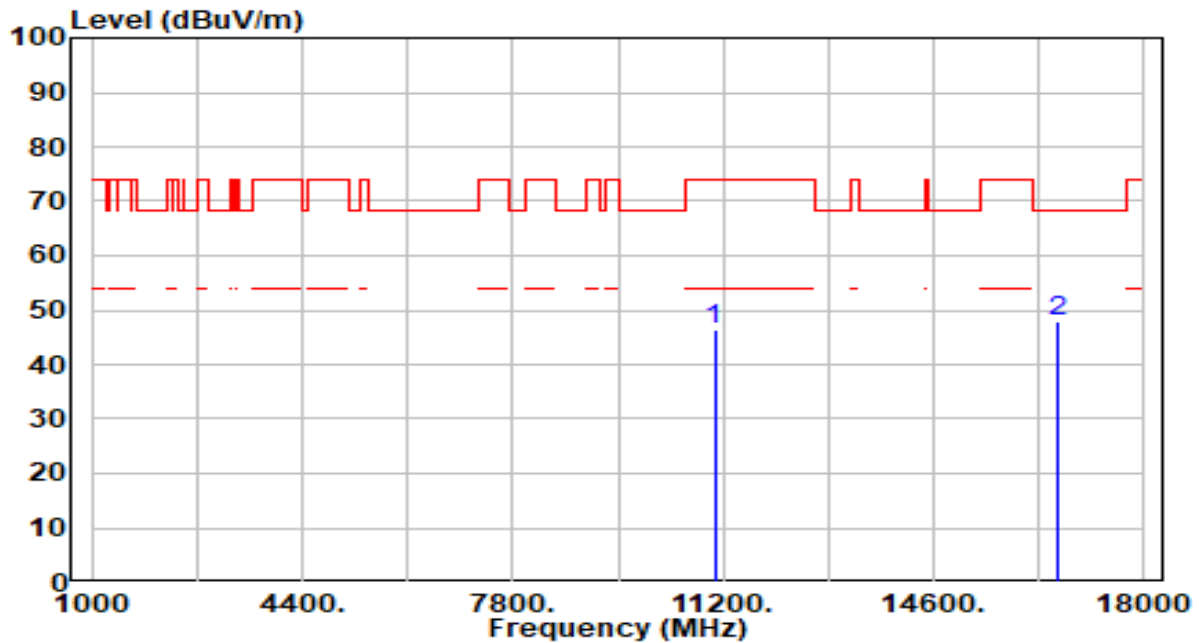


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	41.71	4.60	46.31	-27.69	74.00	100	293	Peak
2	*	16590.000	41.95	6.00	47.94	-20.26	68.20	100	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

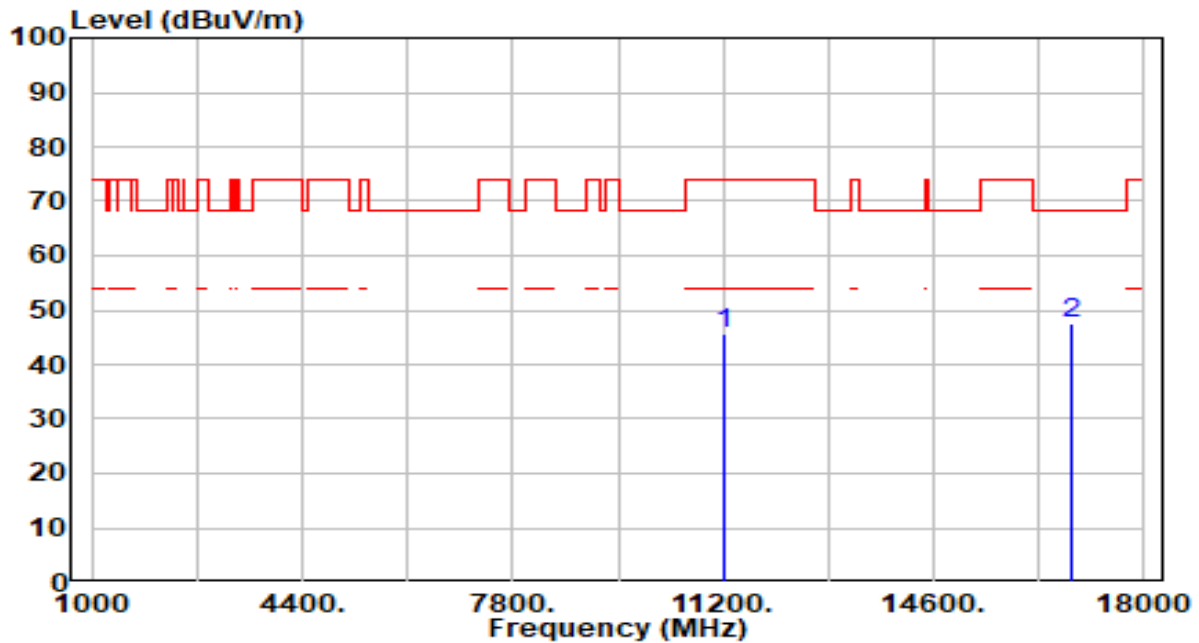


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	40.68	5.00	45.69	-28.31	74.00	100	333	Peak
2	*	16830.000	41.43	5.98	47.41	-20.79	68.20	100	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

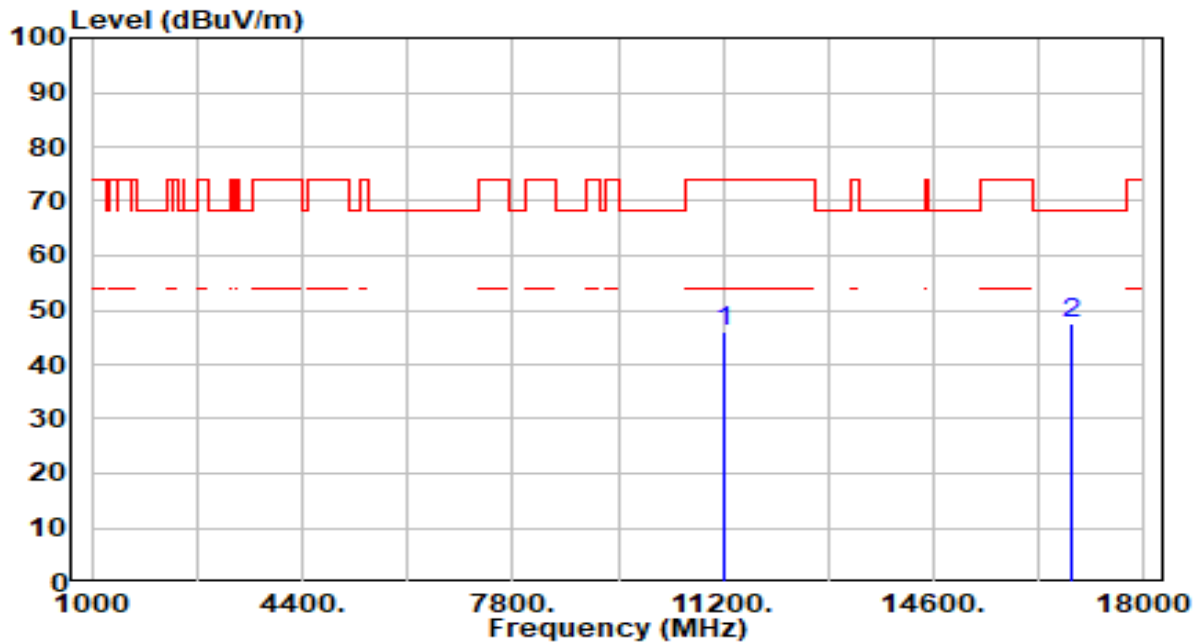


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	41.19	5.00	46.19	-27.81	74.00	100	295	Peak
2	*	16830.000	41.49	5.98	47.48	-20.72	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

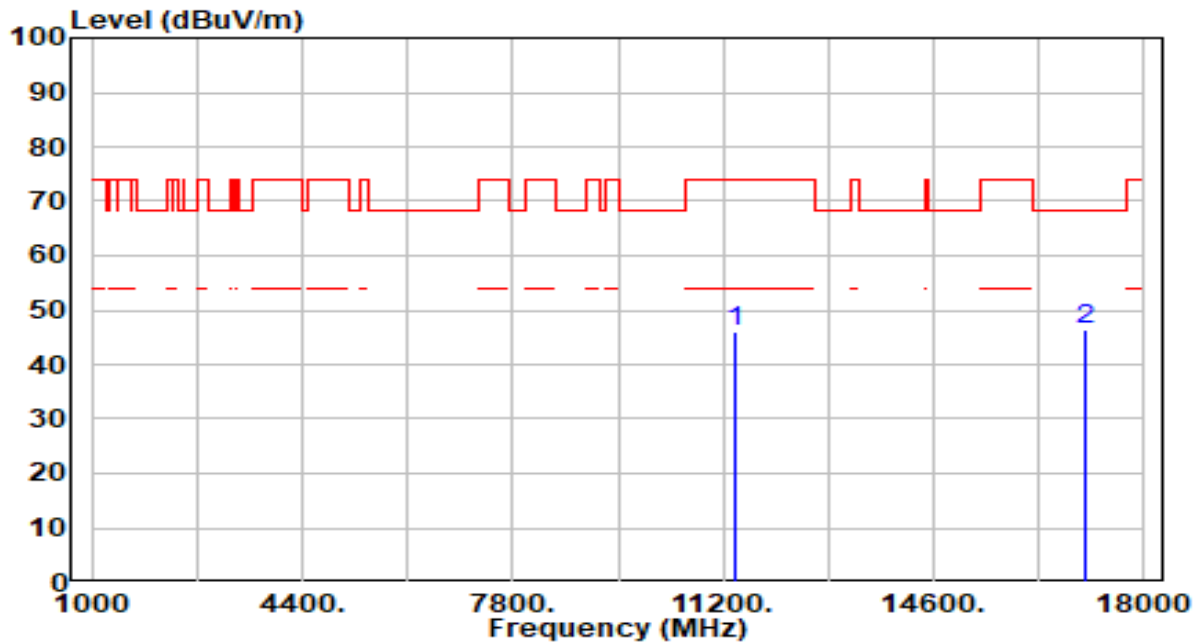


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	40.84	5.19	46.03	-27.97	74.00	100	0	Peak
2	*	17070.000	41.00	5.61	46.60	-21.60	68.20	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

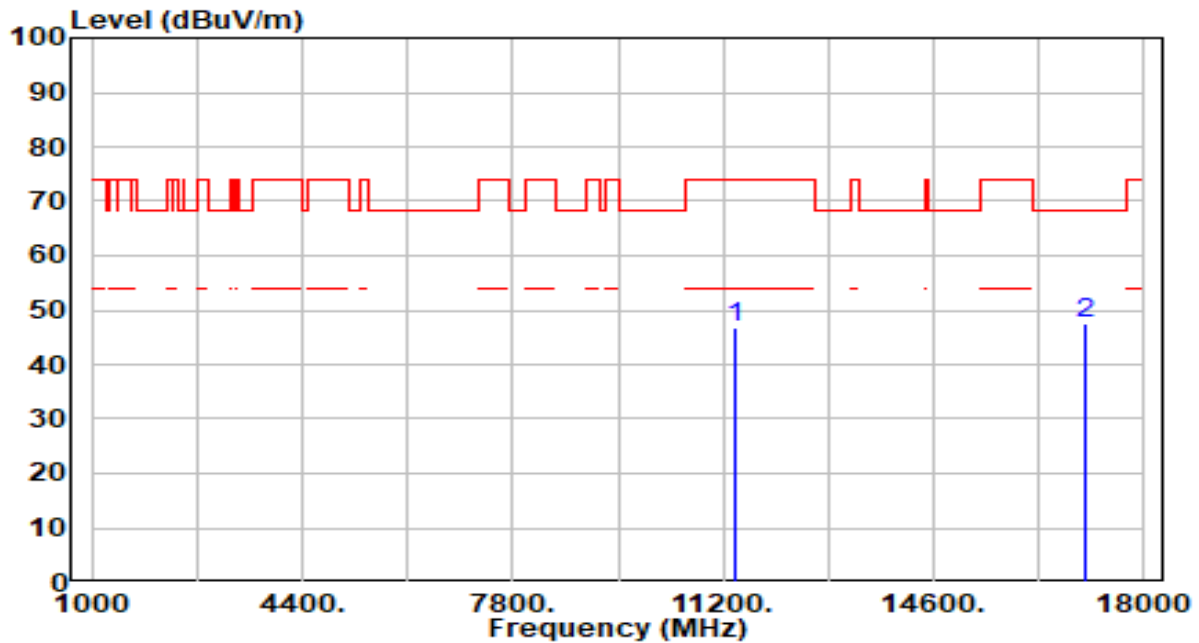


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.67	5.19	46.86	-27.14	74.00	100	219	Peak
2	*	17070.000	41.78	5.61	47.39	-20.81	68.20	100	62	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

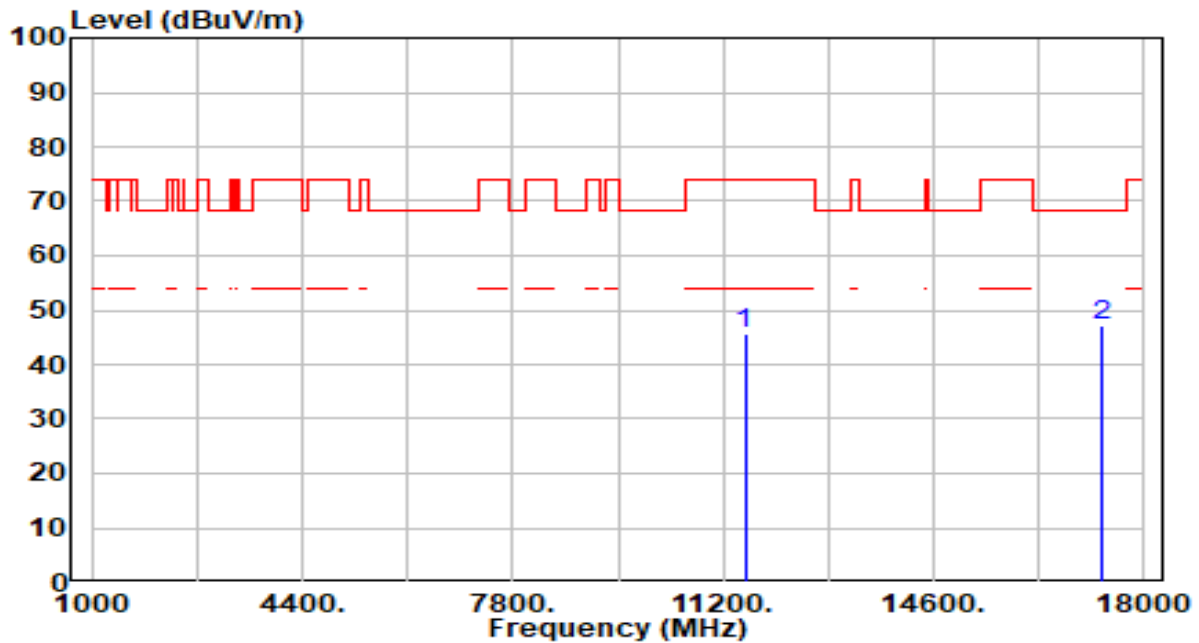


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	40.49	5.33	45.82	-28.18	74.00	100	192	Peak
2	*	17325.000	42.06	5.05	47.11	-21.09	68.20	100	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

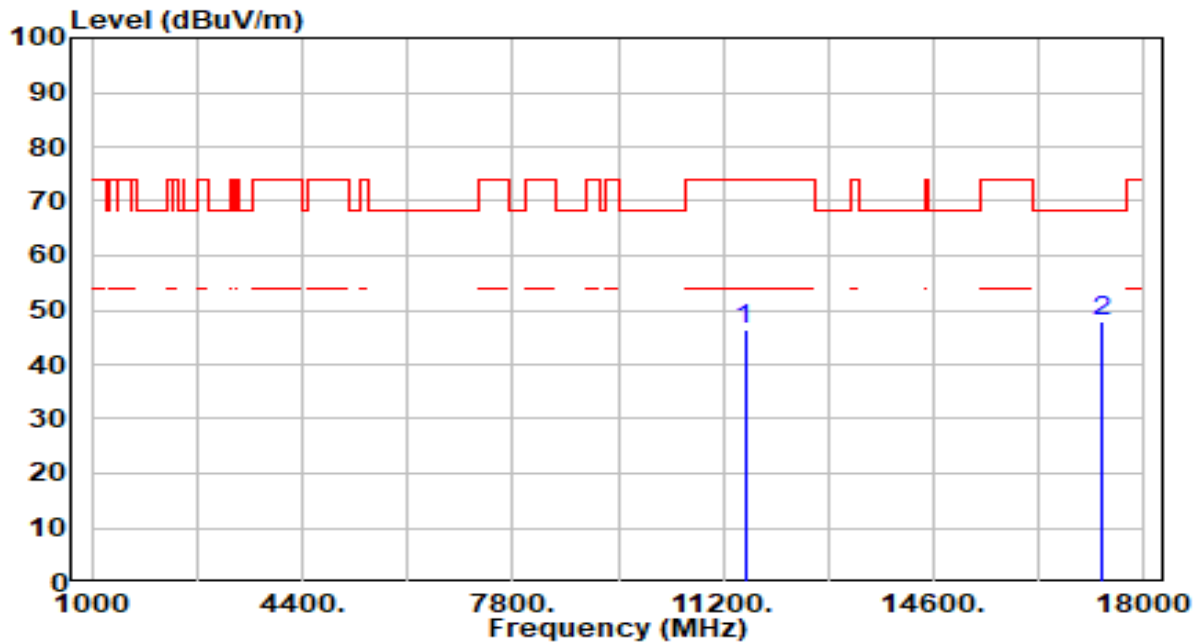


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	41.20	5.33	46.53	-27.47	74.00	100	318	Peak
2	*	17325.000	42.85	5.05	47.91	-20.29	68.20	100	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

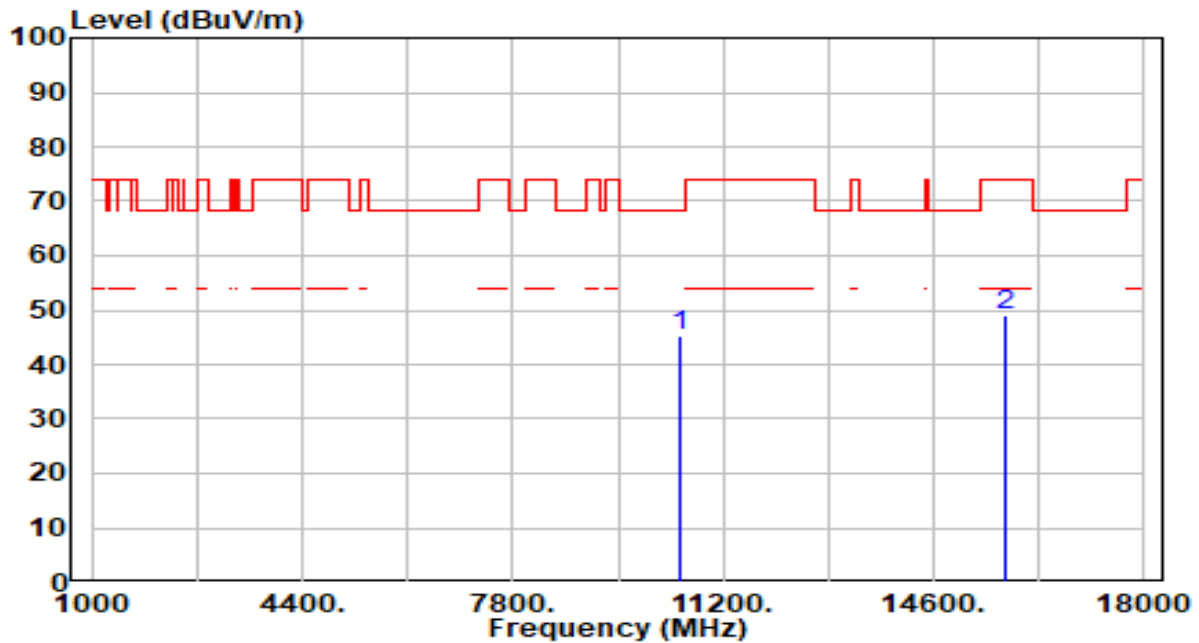


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.63	4.62	45.26	-22.94	68.20	100	181	Peak
2		15750.000	42.58	6.49	49.07	-24.93	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

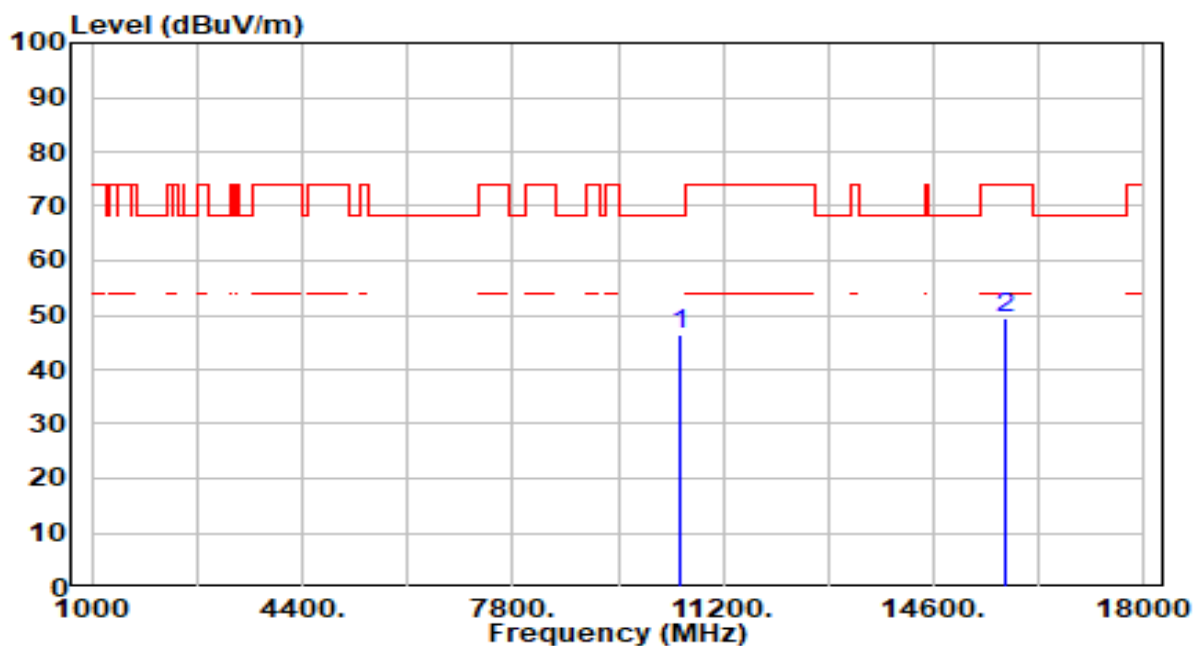


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.71	4.62	46.34	-21.86	68.20	100	28	Peak
2		15750.000	43.06	6.49	49.56	-24.44	74.00	100	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

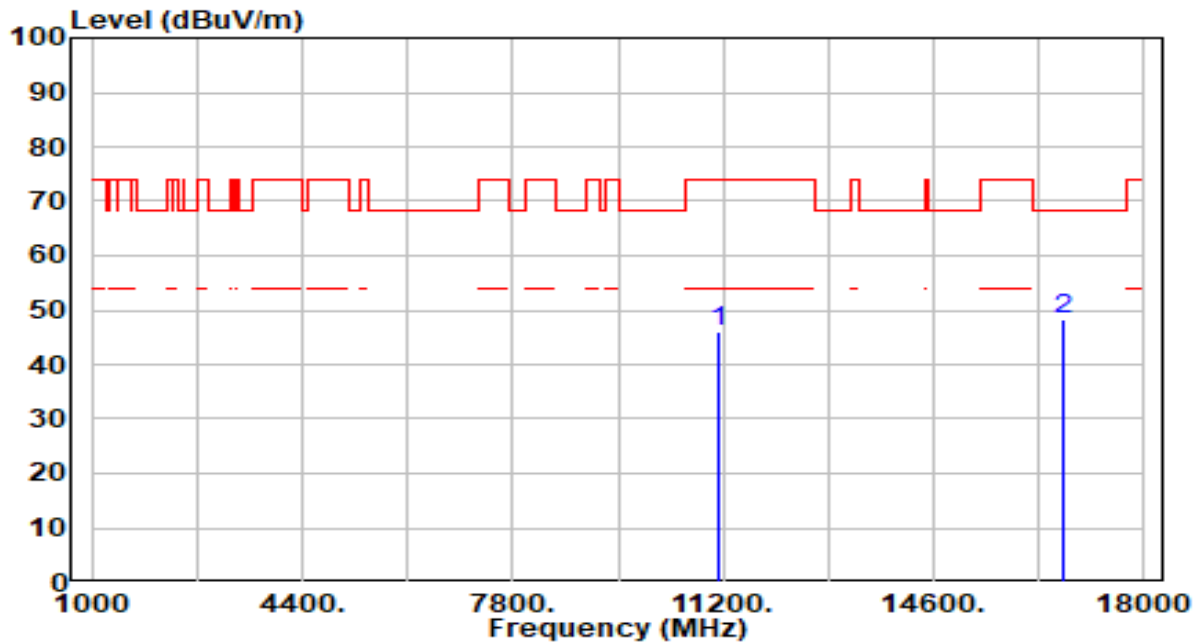


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.36	4.82	46.18	-27.82	74.00	100	142	Peak
2	*	16710.000	42.33	6.01	48.33	-19.87	68.20	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

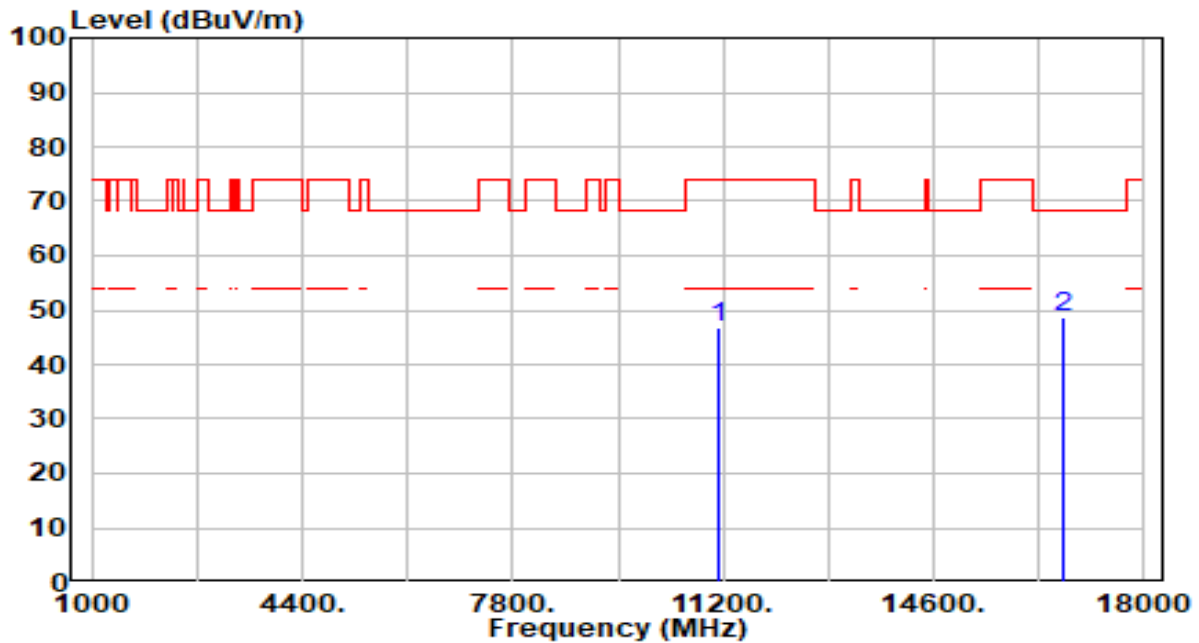


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	42.02	4.82	46.84	-27.16	74.00	100	110	Peak
2	*	16710.000	42.59	6.01	48.59	-19.61	68.20	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

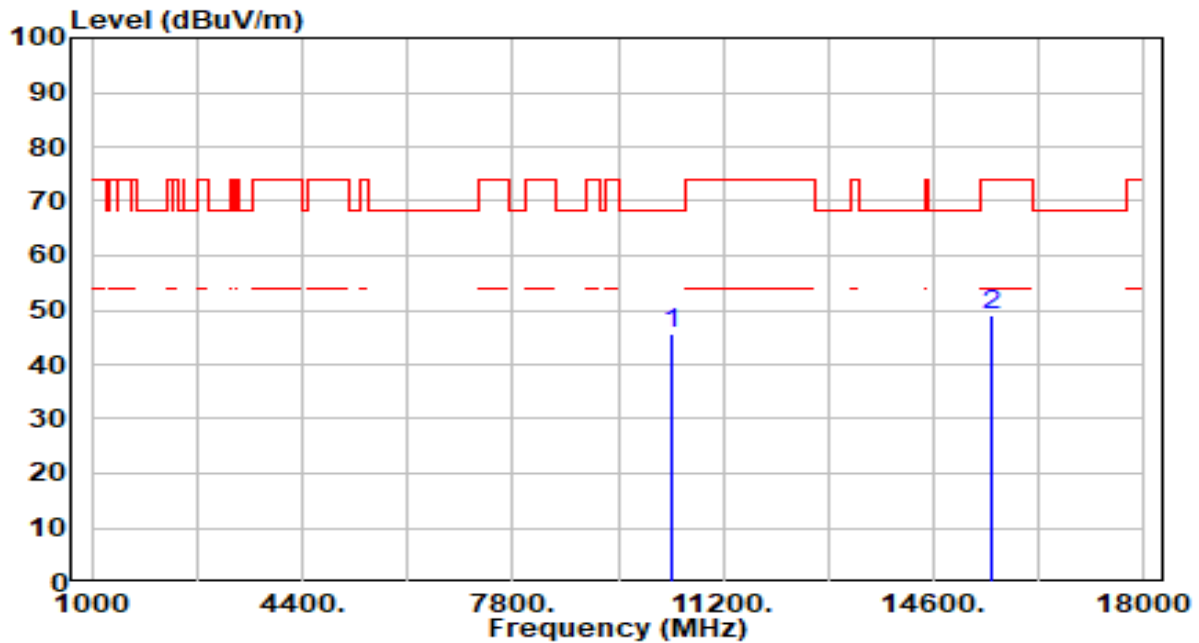


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.01	4.81	45.82	-22.38	68.20	100	147	Peak
2		15540.000	42.75	6.28	49.04	-24.96	74.00	100	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

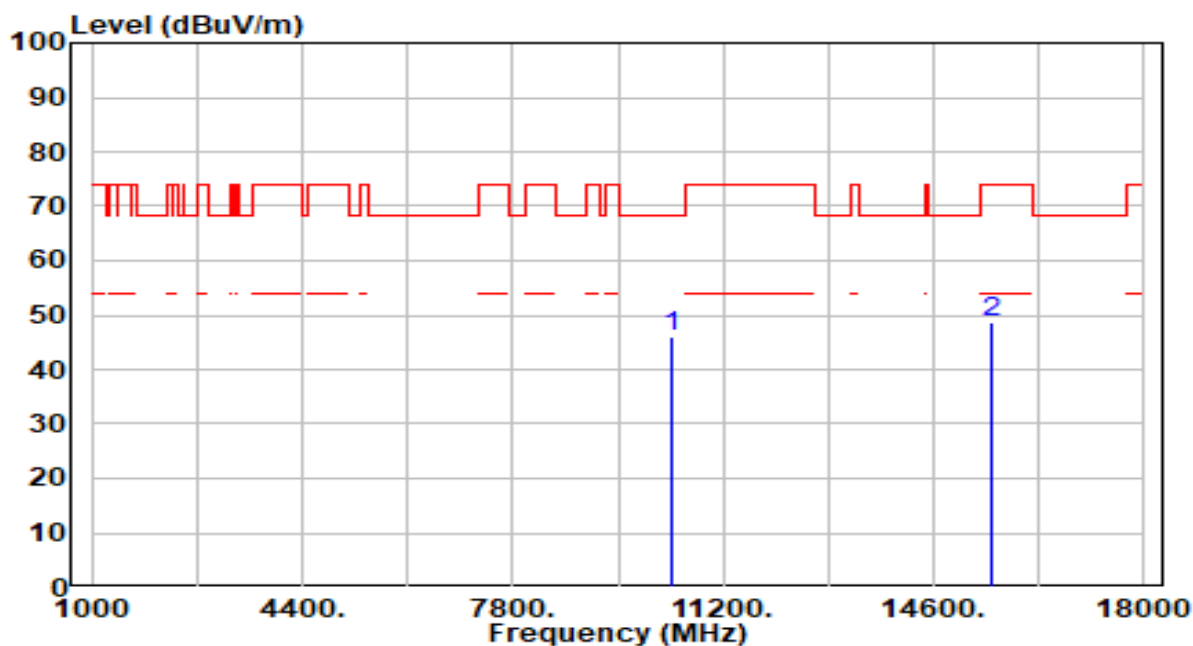


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.26	4.81	46.07	-22.13	68.20	100	346	Peak
2		15540.000	42.32	6.28	48.61	-25.39	74.00	100	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

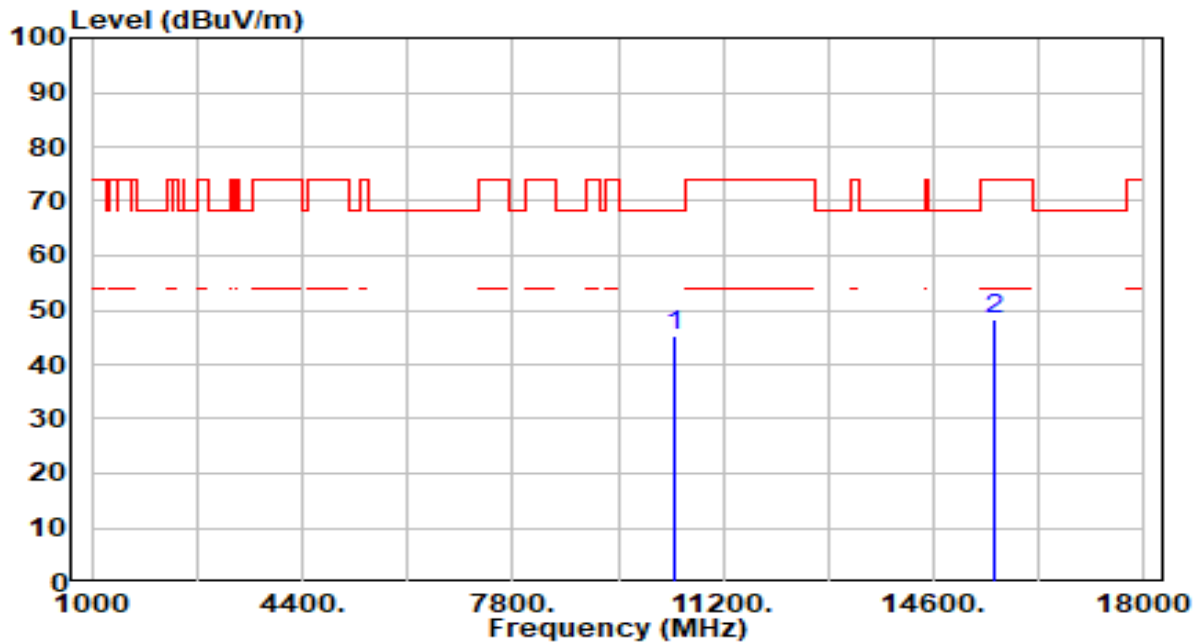


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	40.35	4.77	45.12	-23.08	68.20	100	175	Peak
2		15600.000	42.08	6.19	48.28	-25.72	74.00	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

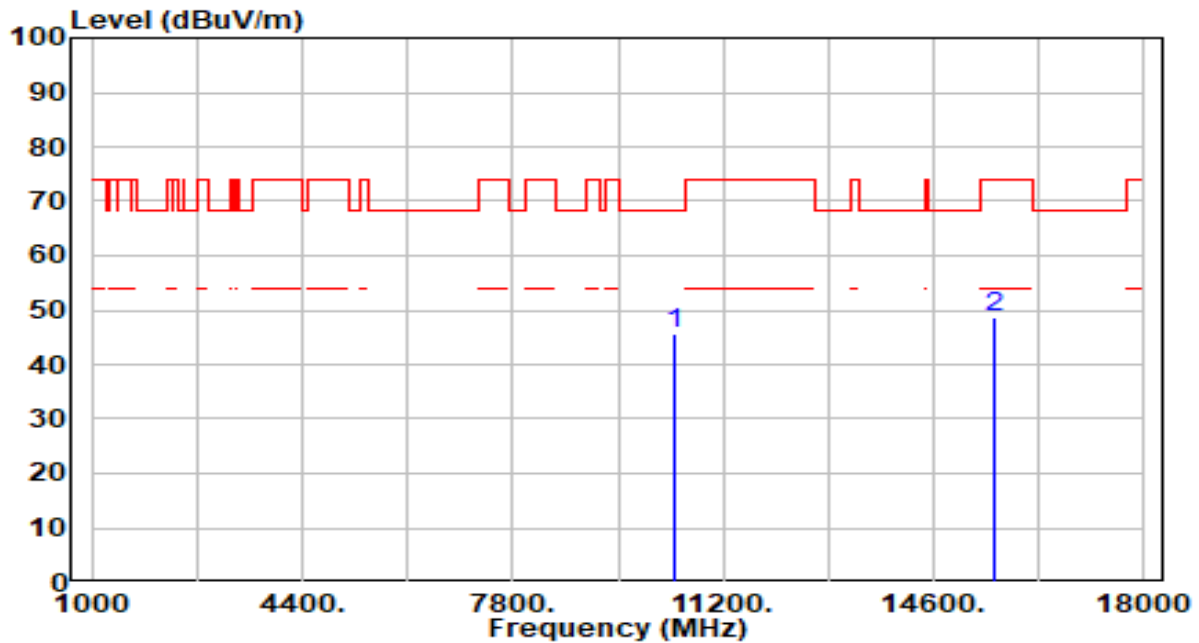


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	40.77	4.77	45.54	-22.66	68.20	100	230	Peak
2		15600.000	42.59	6.19	48.79	-25.21	74.00	100	287	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

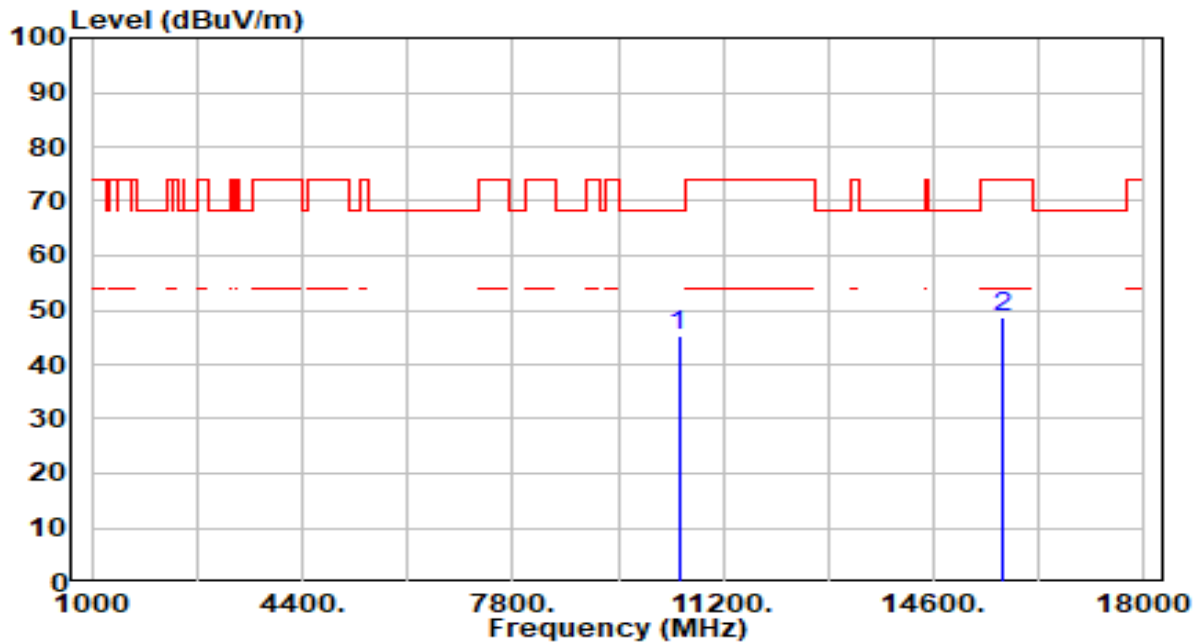


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	40.72	4.65	45.38	-22.82	68.20	100	360	Peak
2		15720.000	42.29	6.43	48.72	-25.28	74.00	100	223	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

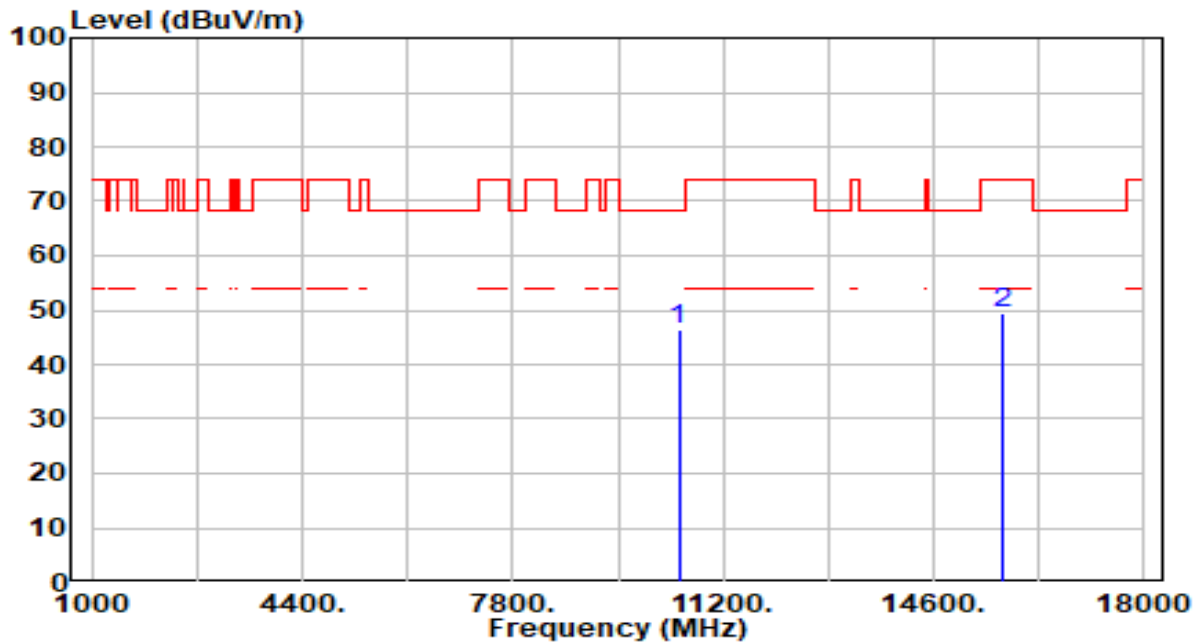


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.65	4.65	46.30	-21.90	68.20	100	359	Peak
2		15720.000	43.00	6.43	49.43	-24.57	74.00	100	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

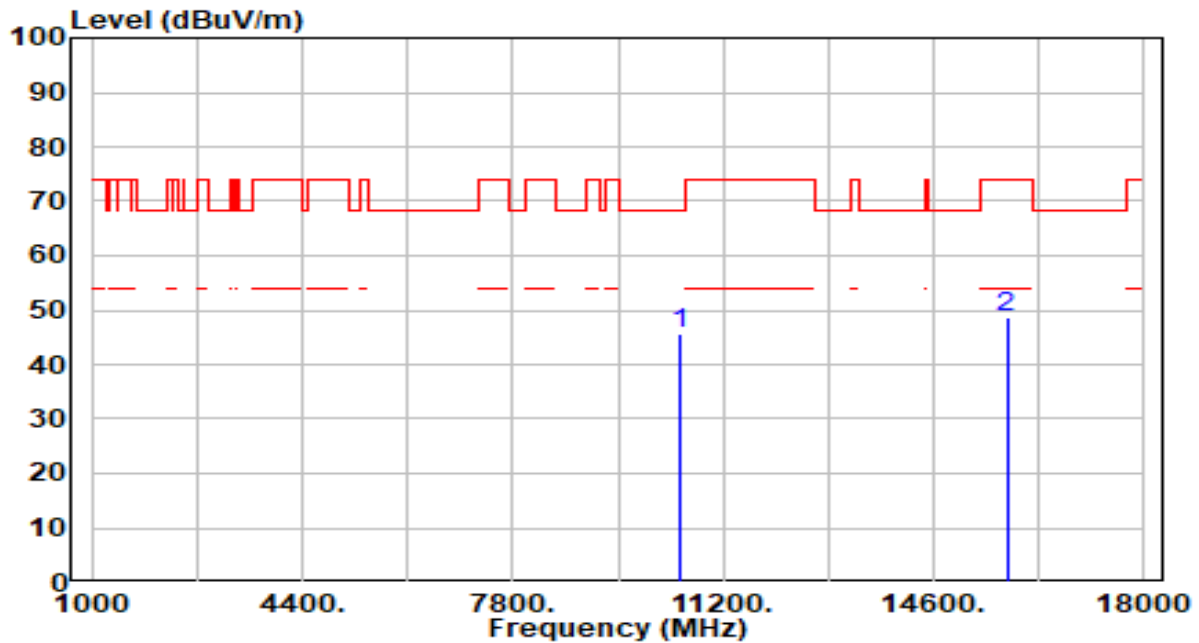


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.08	4.61	45.69	-22.51	68.20	100	11	Peak
2		15780.000	42.15	6.55	48.70	-25.30	74.00	100	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

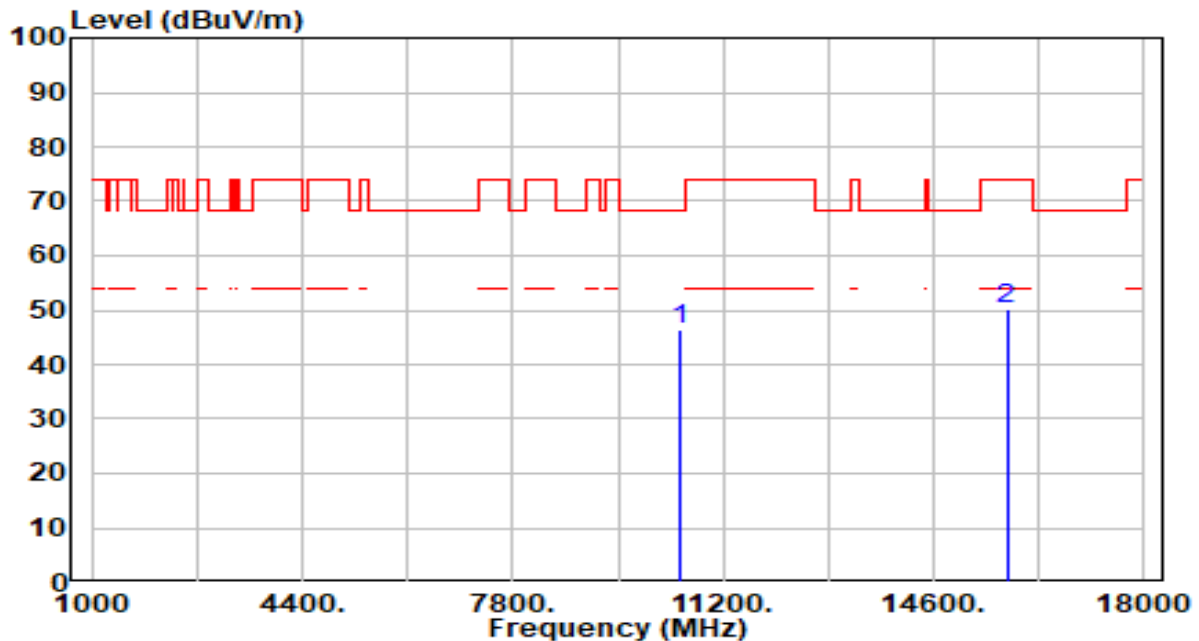


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.79	4.61	46.40	-21.80	68.20	100	2	Peak
2		15780.000	43.48	6.55	50.03	-23.97	74.00	100	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

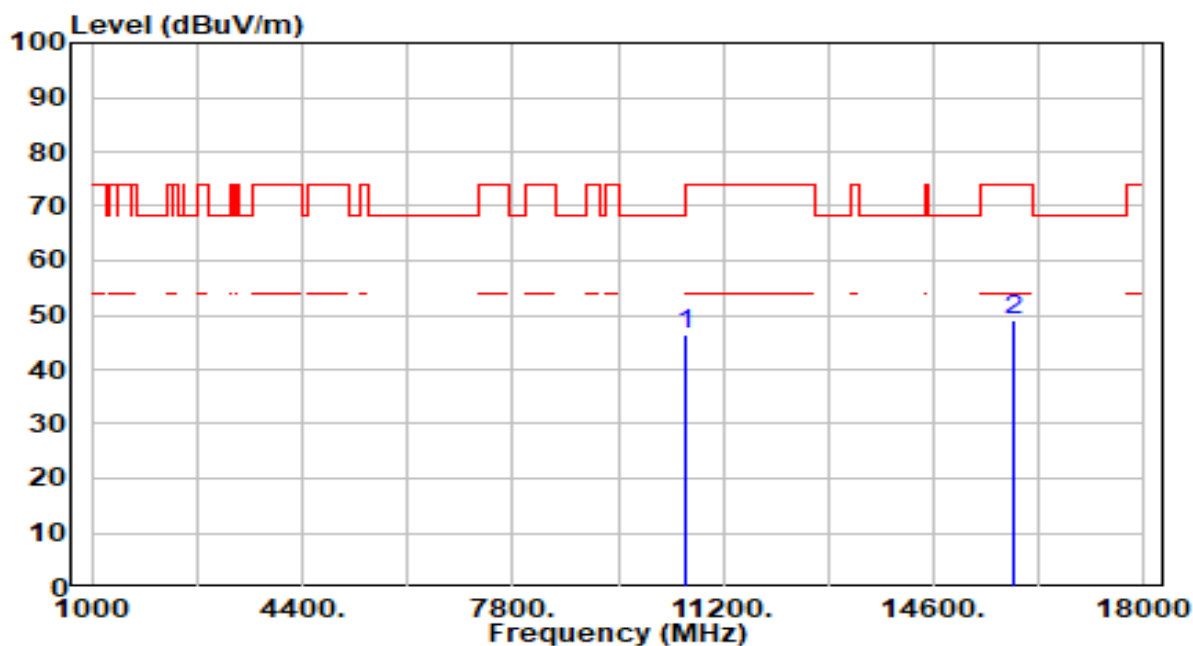


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.78	4.55	46.33	-21.87	68.20	100	220	Peak
2		15900.000	42.32	6.64	48.96	-25.04	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

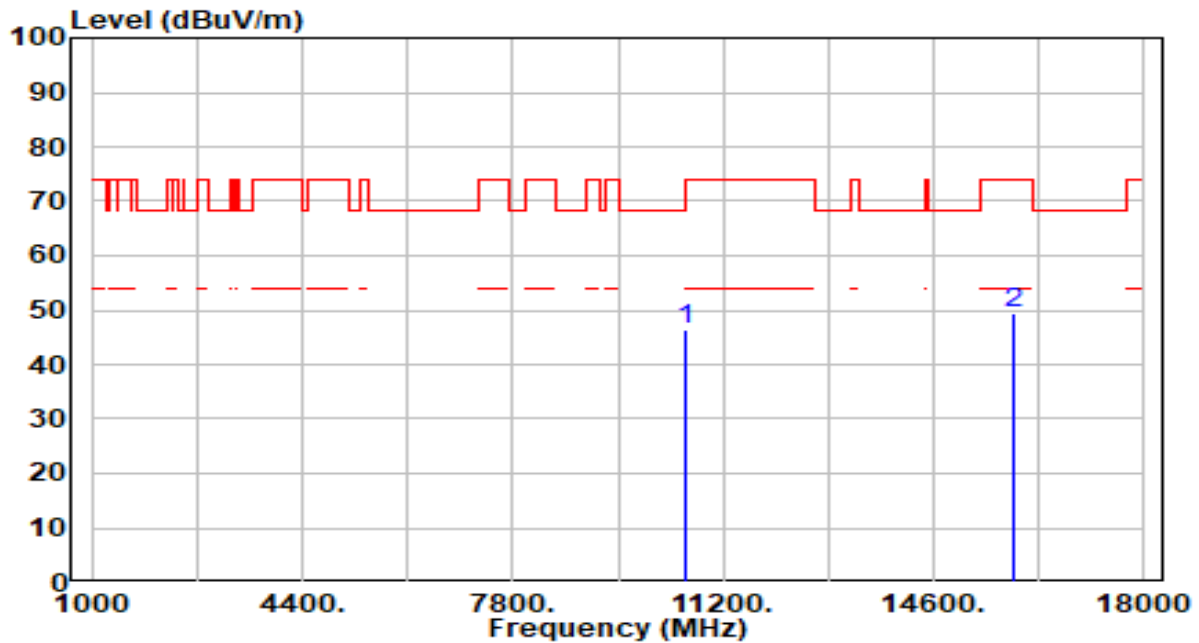


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.94	4.55	46.48	-21.72	68.20	100	37	Peak
2		15900.000	42.62	6.64	49.26	-24.74	74.00	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

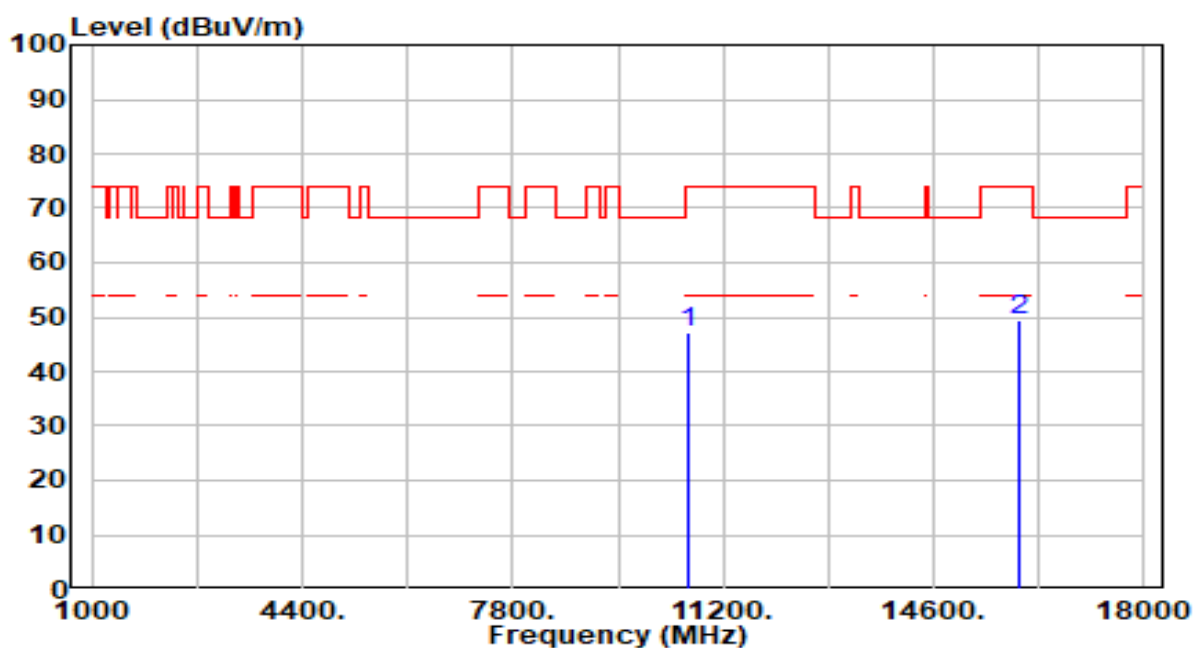


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	42.61	4.58	47.19	-26.81	74.00	100	0	Peak
2	*	15960.000	42.85	6.67	49.52	-24.48	74.00	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

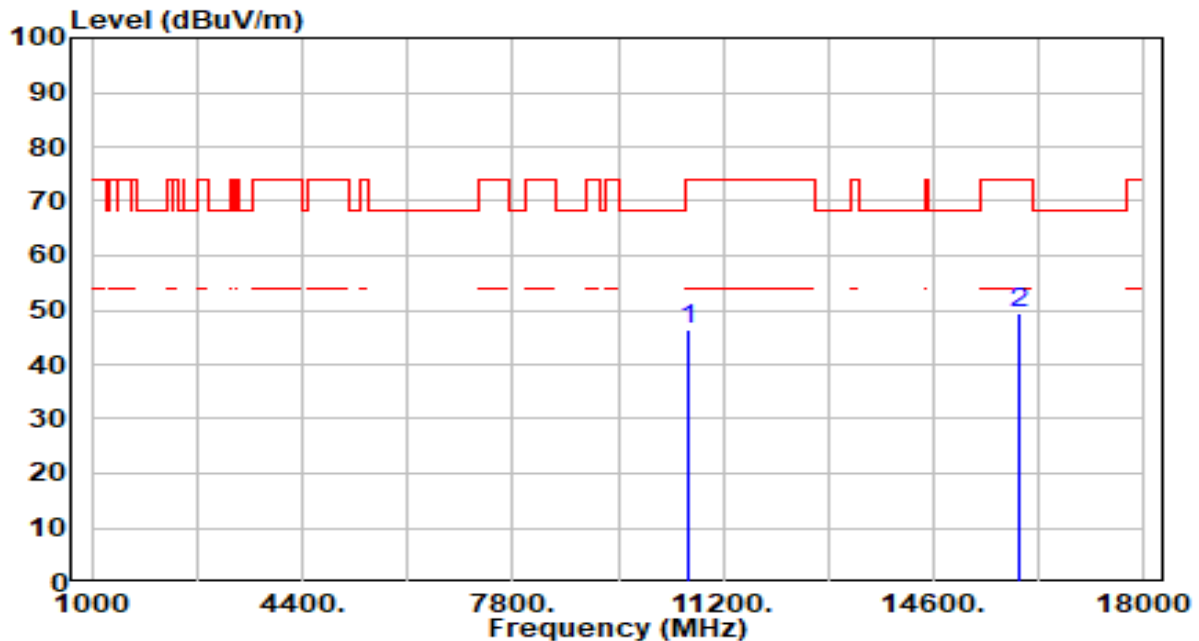


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.91	4.58	46.48	-27.52	74.00	100	37	Peak
2	*	15960.000	42.86	6.67	49.53	-24.47	74.00	100	26	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

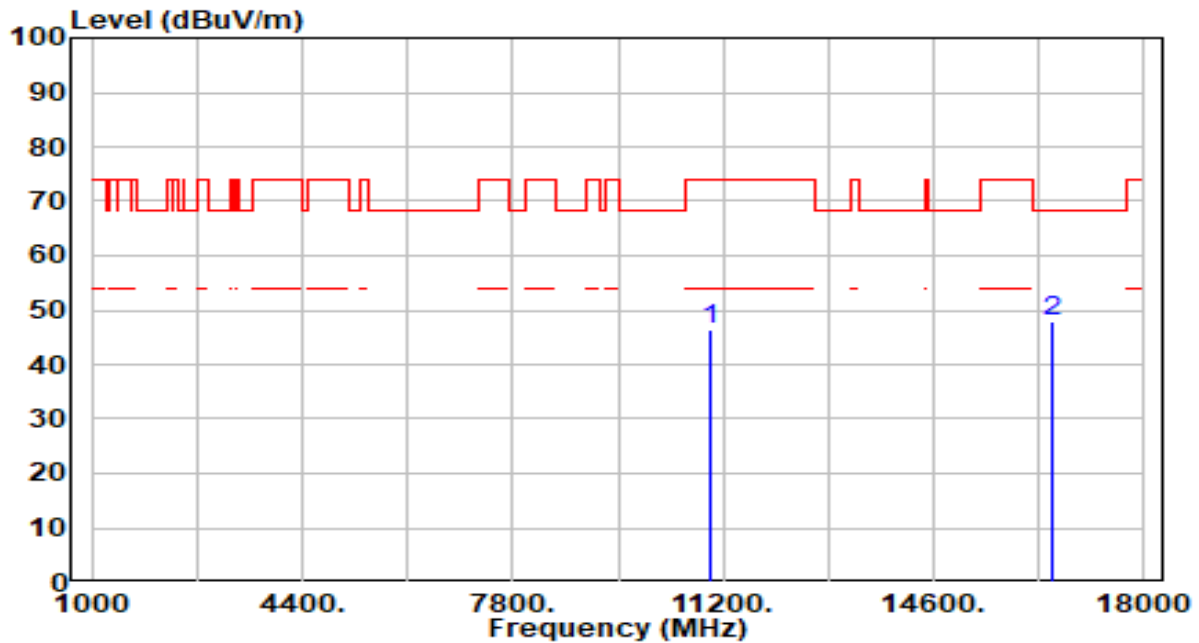


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.79	4.44	46.23	-27.77	74.00	100	269	Peak
2	*	16500.000	41.73	6.07	47.80	-20.40	68.20	100	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

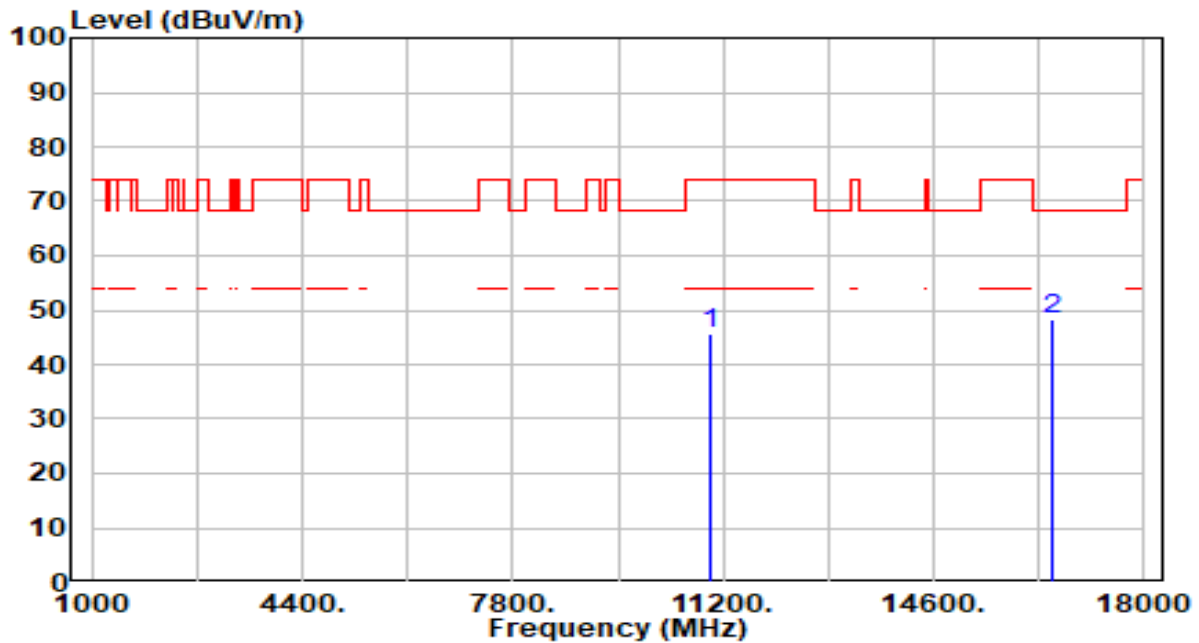


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.29	4.44	45.73	-28.27	74.00	100	103	Peak
2	*	16500.000	42.23	6.07	48.30	-19.90	68.20	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

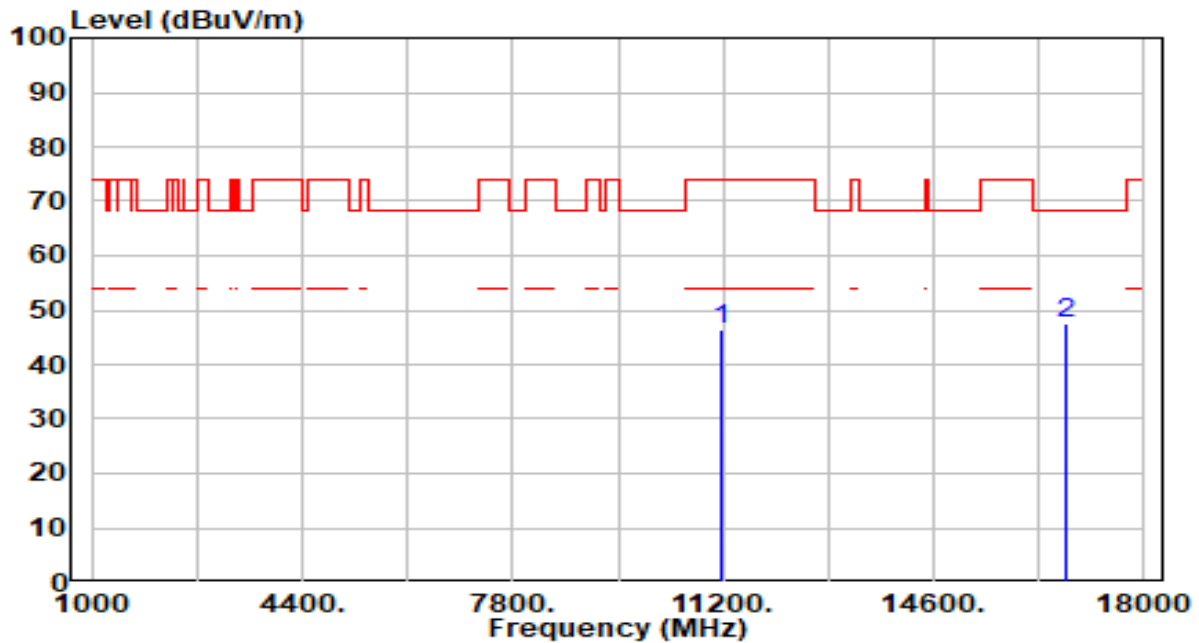


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.53	4.87	46.40	-27.60	74.00	100	320	Peak
2	*	16740.000	41.38	6.01	47.39	-20.81	68.20	100	141	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

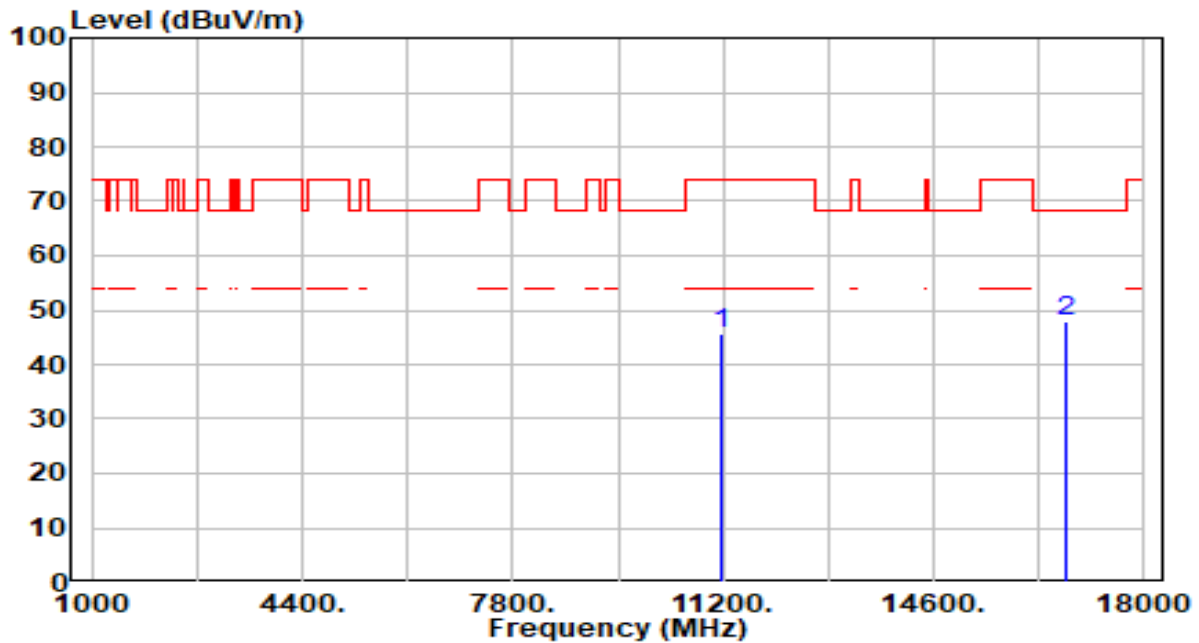


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	40.79	4.87	45.66	-28.34	74.00	100	236	Peak
2	*	16740.000	41.91	6.01	47.93	-20.27	68.20	100	69	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

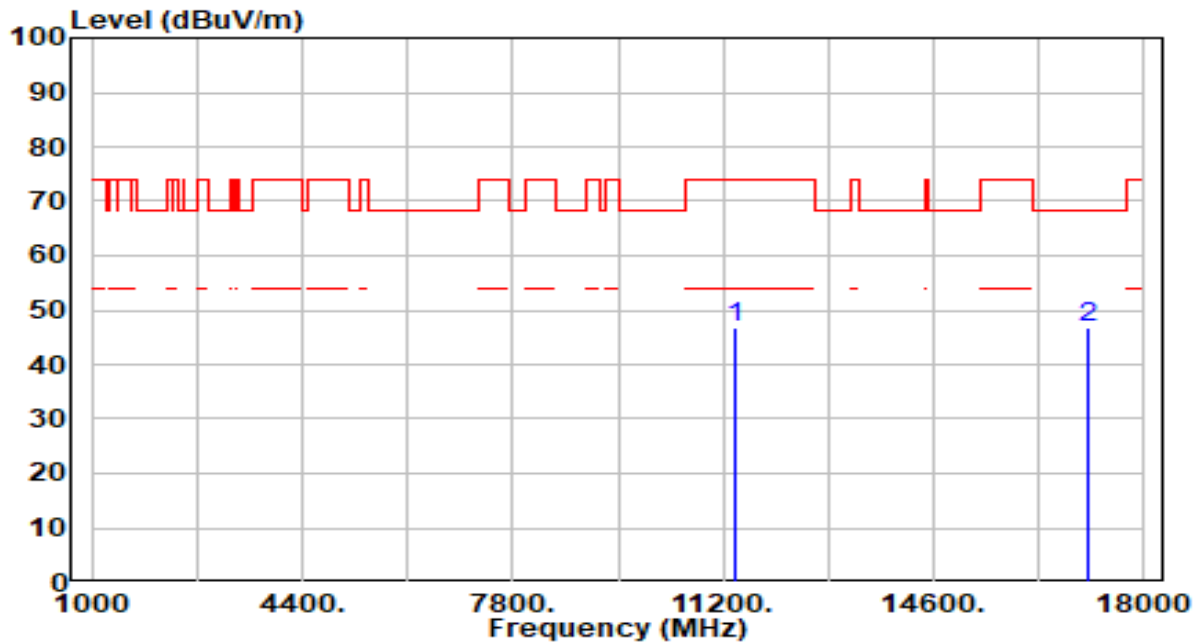


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.61	5.22	46.82	-27.18	74.00	100	169	Peak
2	*	17100.000	41.42	5.54	46.96	-21.24	68.20	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

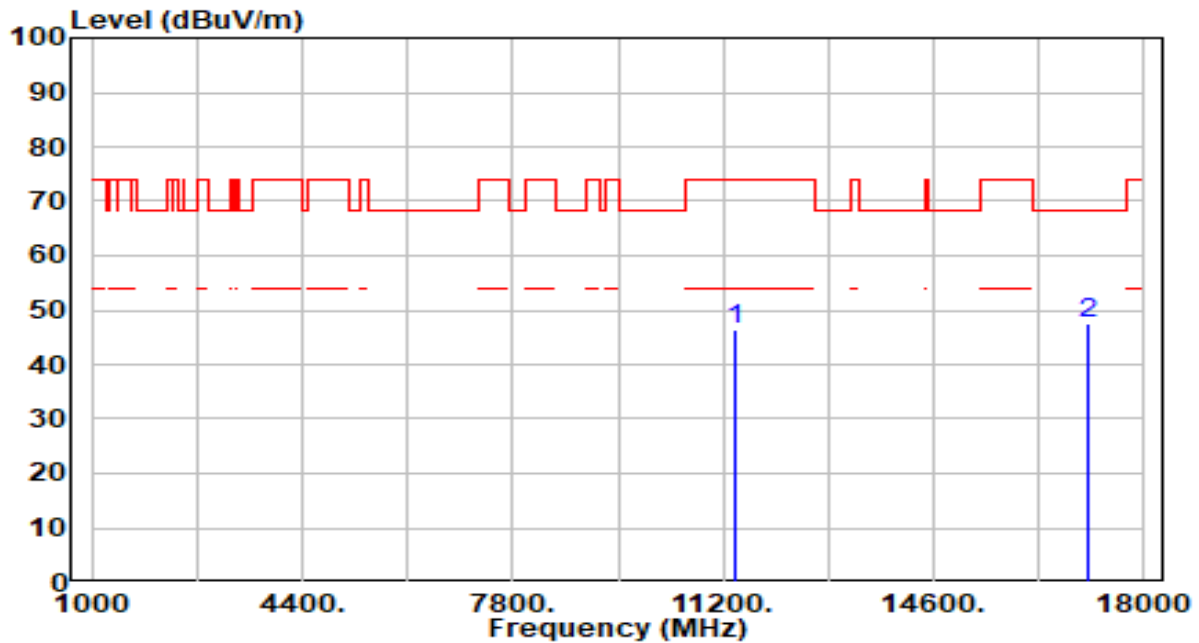


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.20	5.22	46.42	-27.58	74.00	100	106	Peak
2	*	17100.000	42.04	5.54	47.59	-20.61	68.20	100	287	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

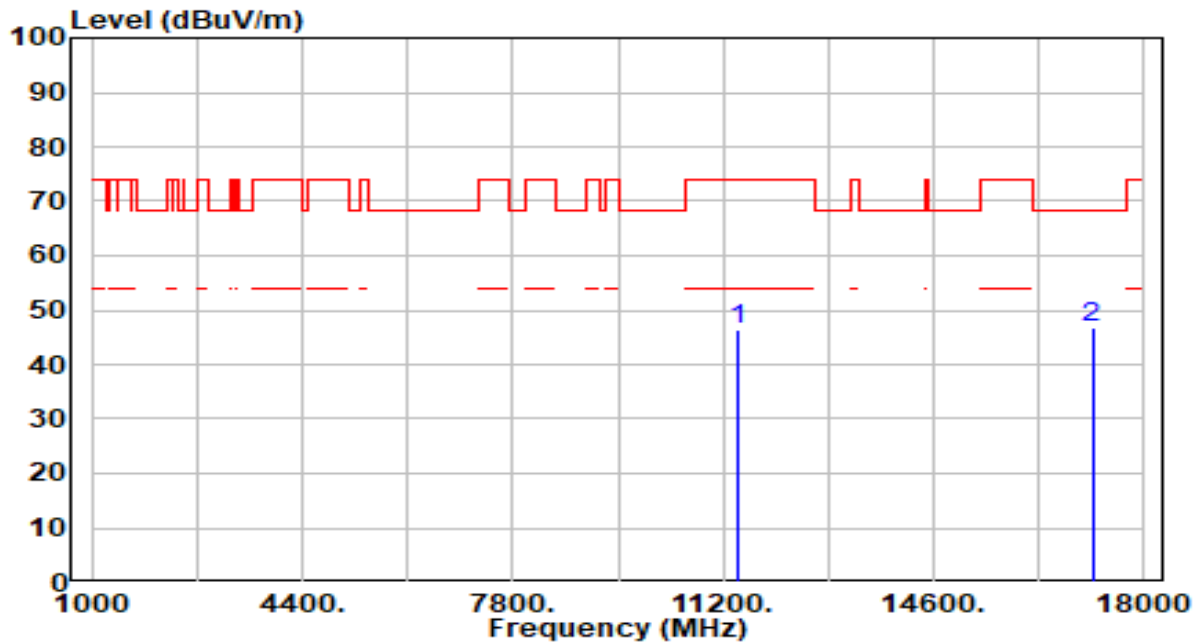


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.00	5.24	46.25	-27.75	74.00	100	345	Peak
2	*	17160.000	41.51	5.41	46.92	-21.28	68.20	100	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

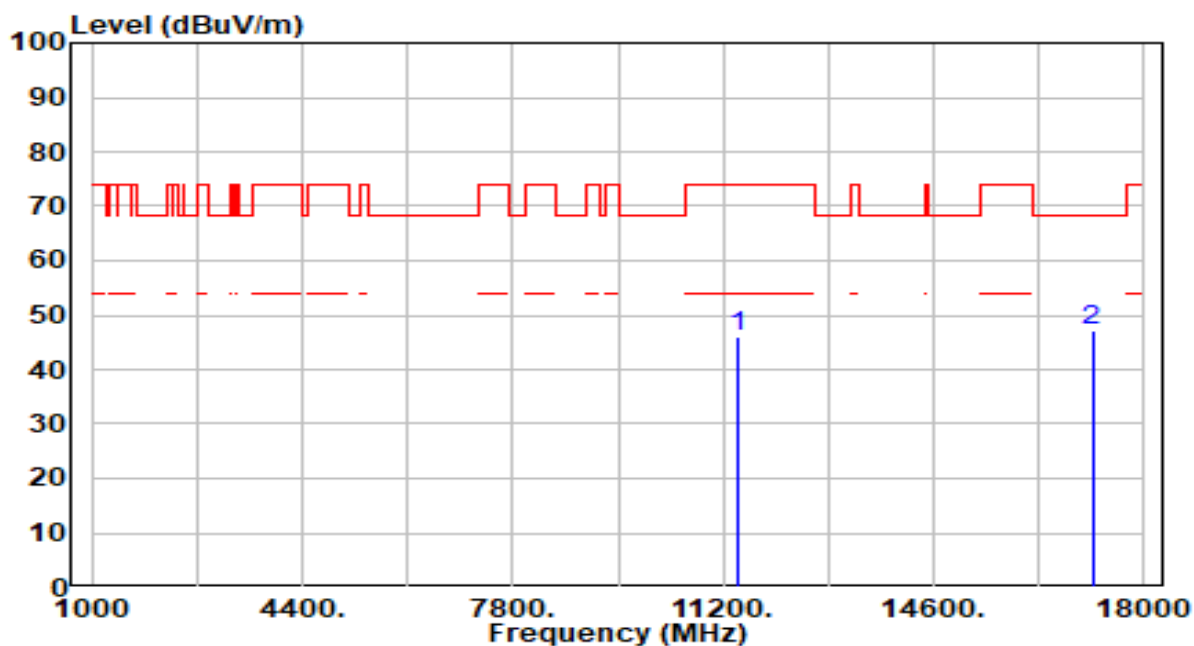


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	40.77	5.24	46.02	-27.98	74.00	100	360	Peak
2	*	17160.000	41.82	5.41	47.23	-20.97	68.20	100	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

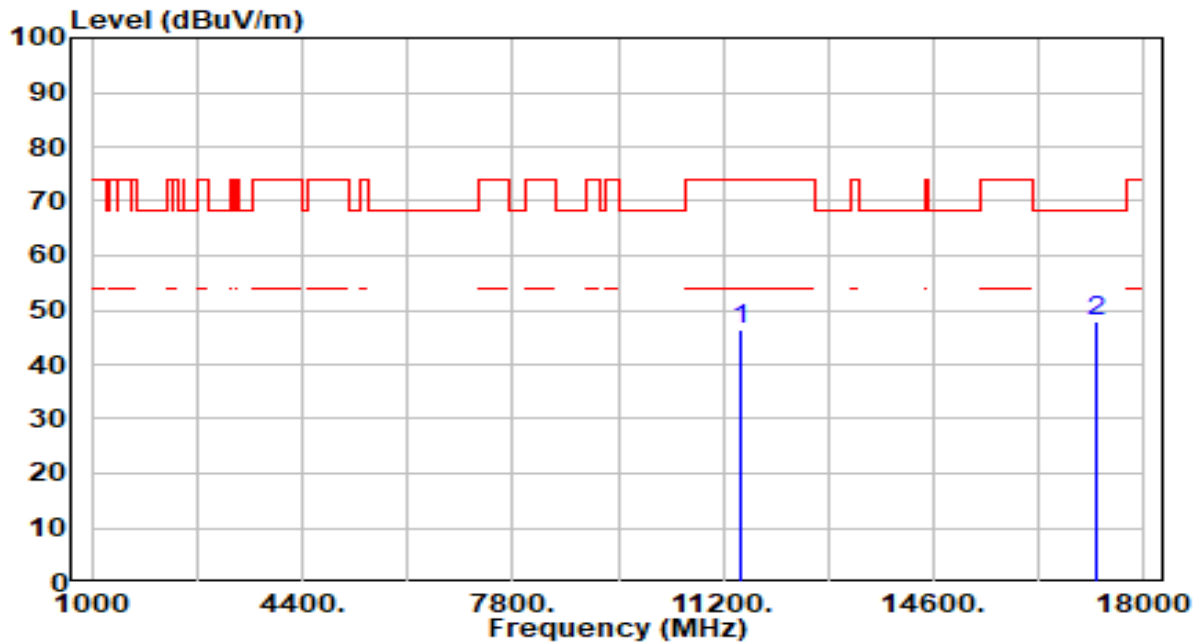


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.01	5.28	46.29	-27.71	74.00	100	172	Peak
2	*	17235.000	42.79	5.25	48.04	-20.16	68.20	100	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

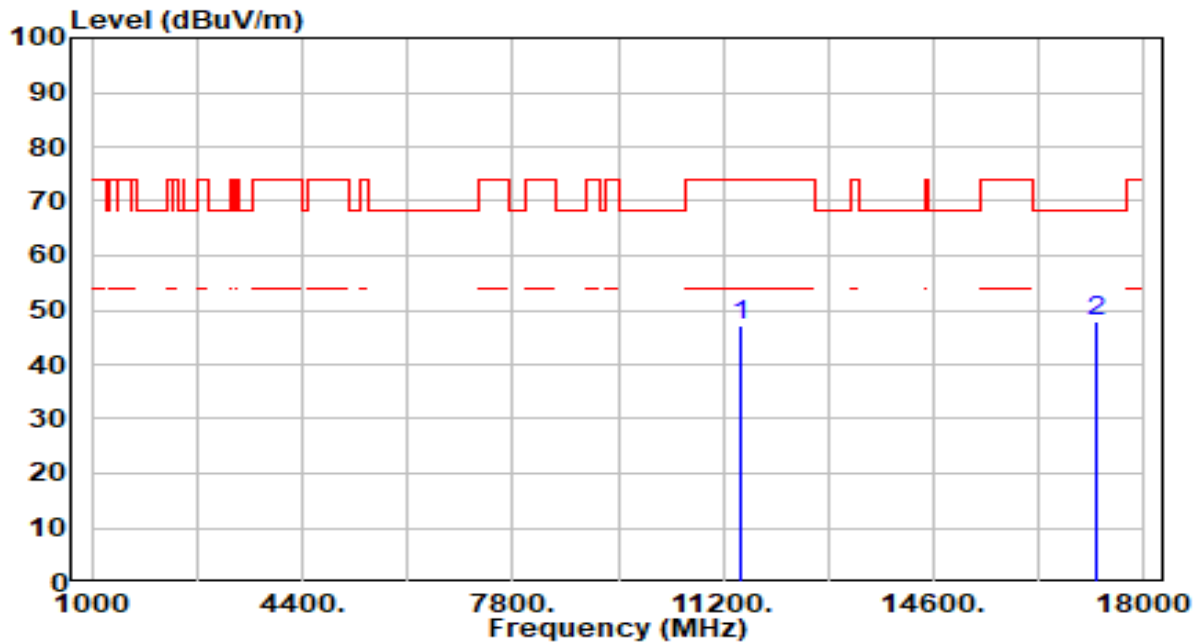


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.90	5.28	47.17	-26.83	74.00	100	12	Peak
2	*	17235.000	42.83	5.25	48.08	-20.12	68.20	100	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

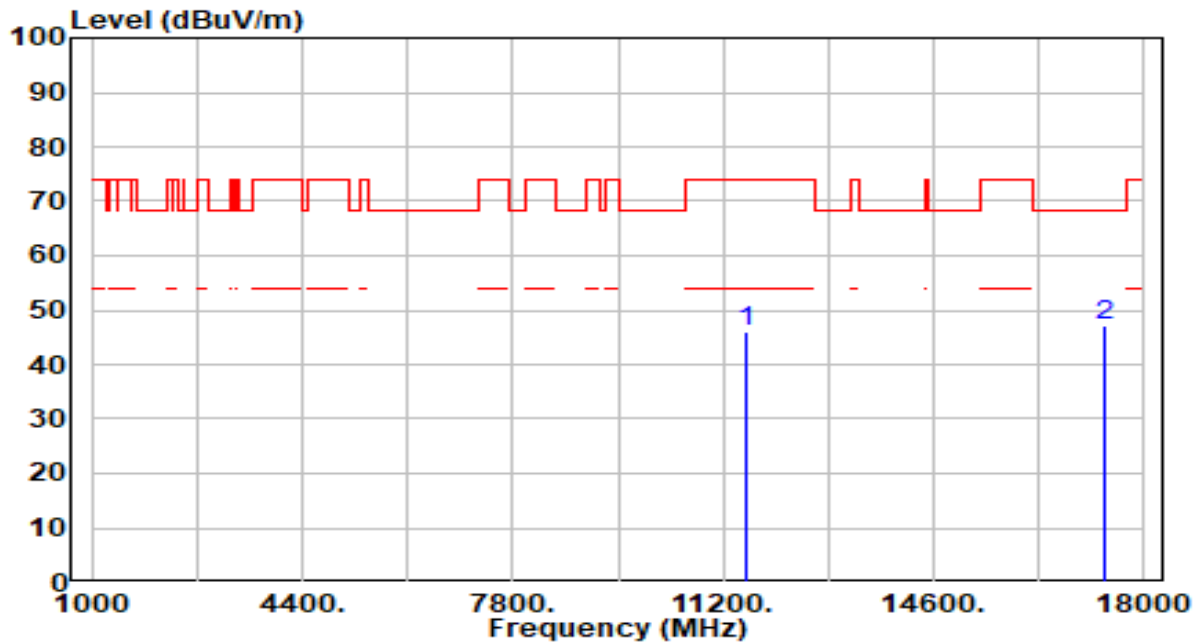


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	40.62	5.35	45.97	-28.03	74.00	100	237	Peak
2	*	17355.000	42.07	4.99	47.05	-21.15	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

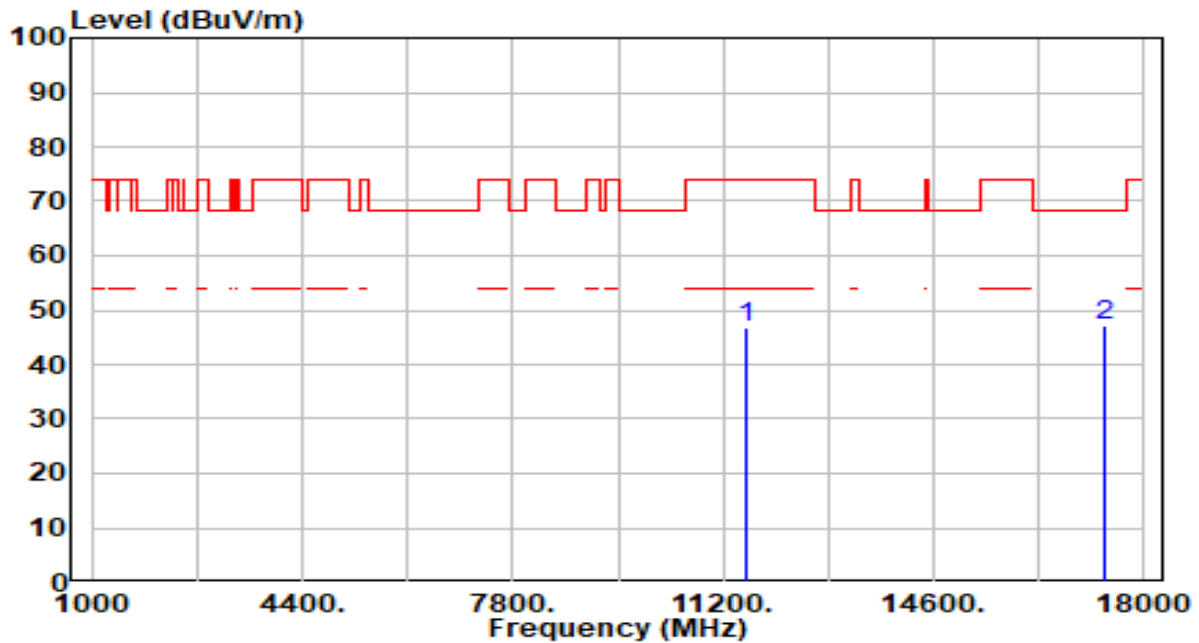


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	41.29	5.35	46.64	-27.36	74.00	100	49	Peak
2	*	17355.000	42.15	4.99	47.14	-21.06	68.20	100	278	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

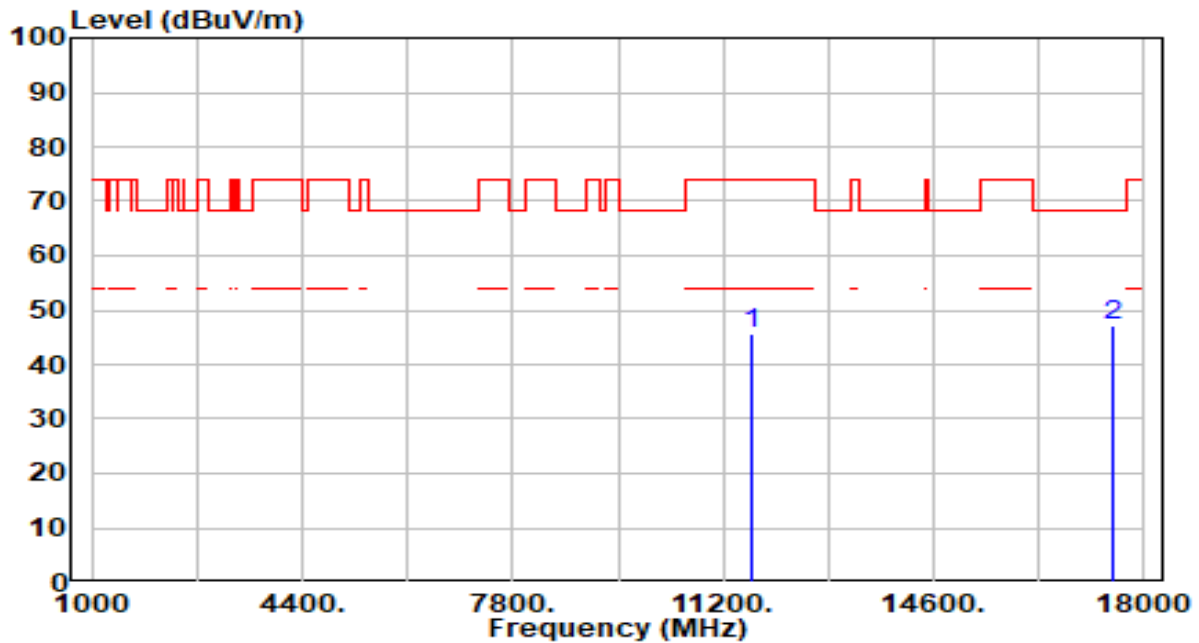


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	40.40	5.37	45.77	-28.23	74.00	100	31	Peak
2	*	17475.000	42.05	5.02	47.07	-21.13	68.20	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

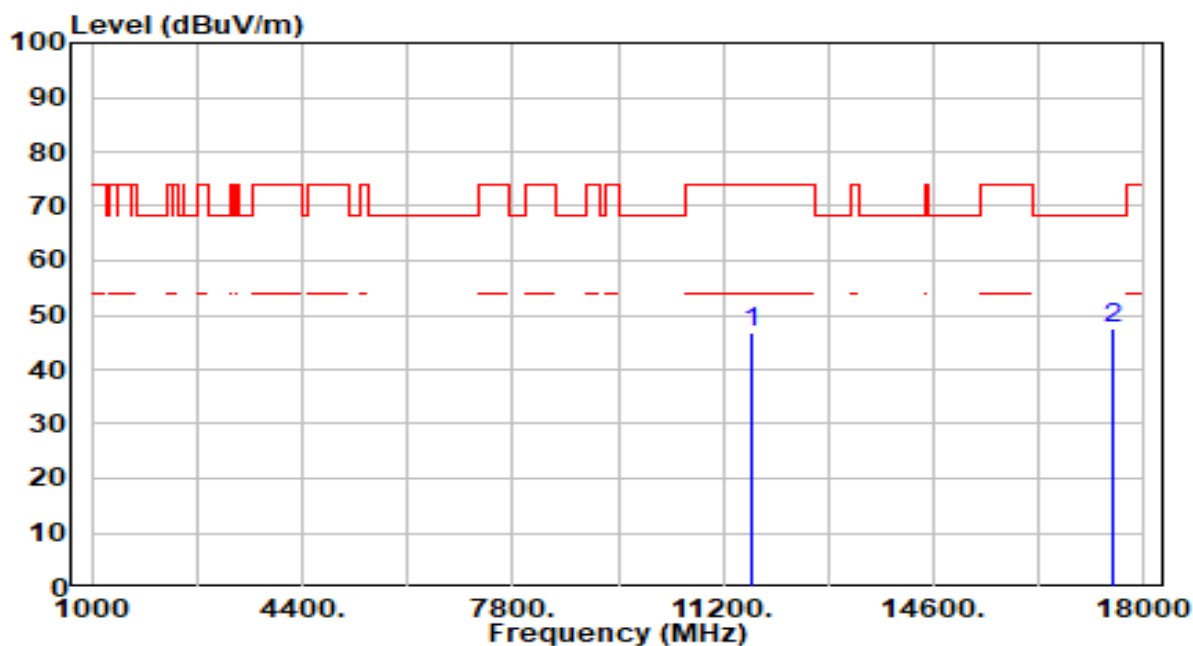


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.61	5.37	46.98	-27.02	74.00	100	255	Peak
2	*	17475.000	42.57	5.02	47.60	-20.60	68.20	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

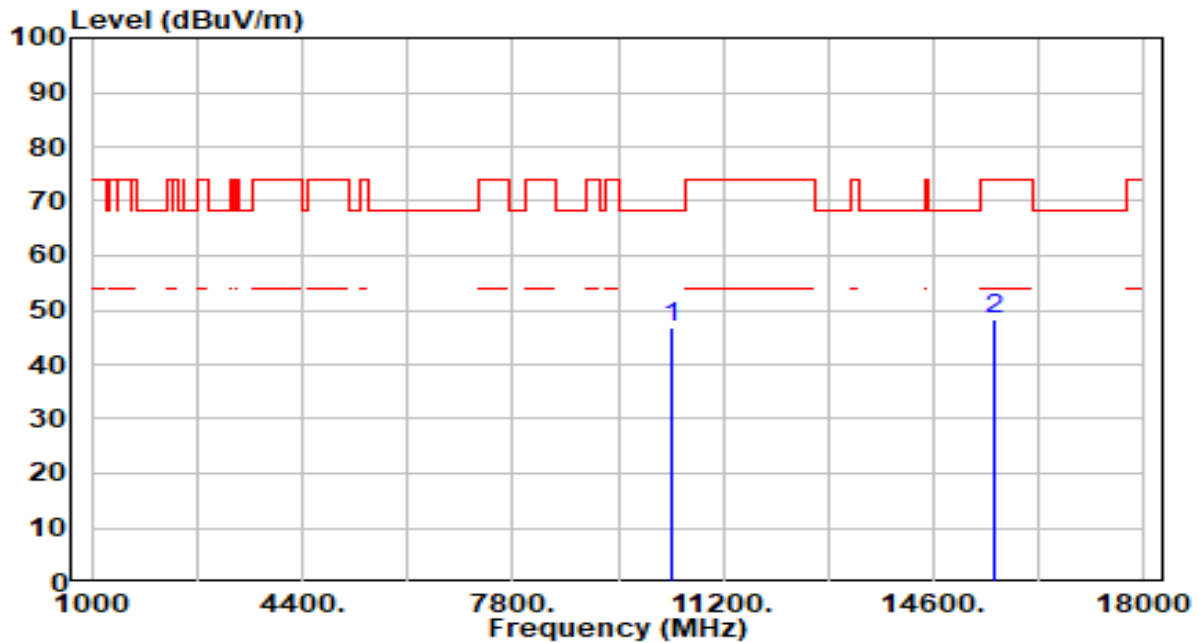


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.84	4.79	46.64	-21.56	68.20	100	360	Peak
2		15570.000	42.14	6.24	48.38	-25.62	74.00	100	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

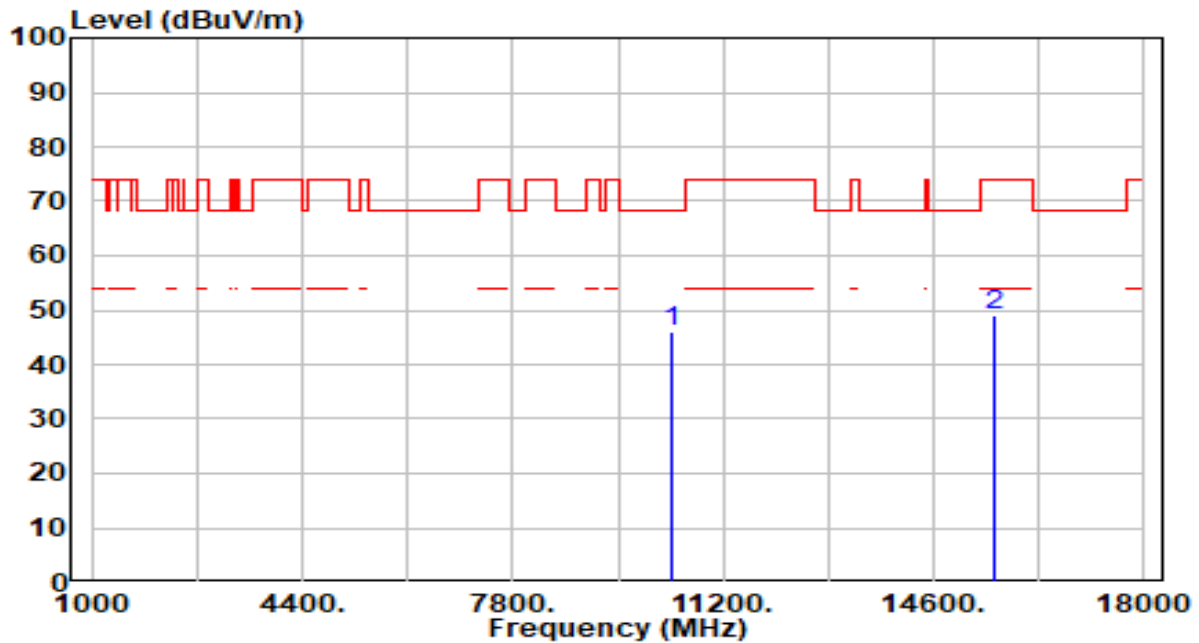


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.39	4.79	46.18	-22.02	68.20	100	57	Peak
2		15570.000	42.76	6.24	49.00	-25.00	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

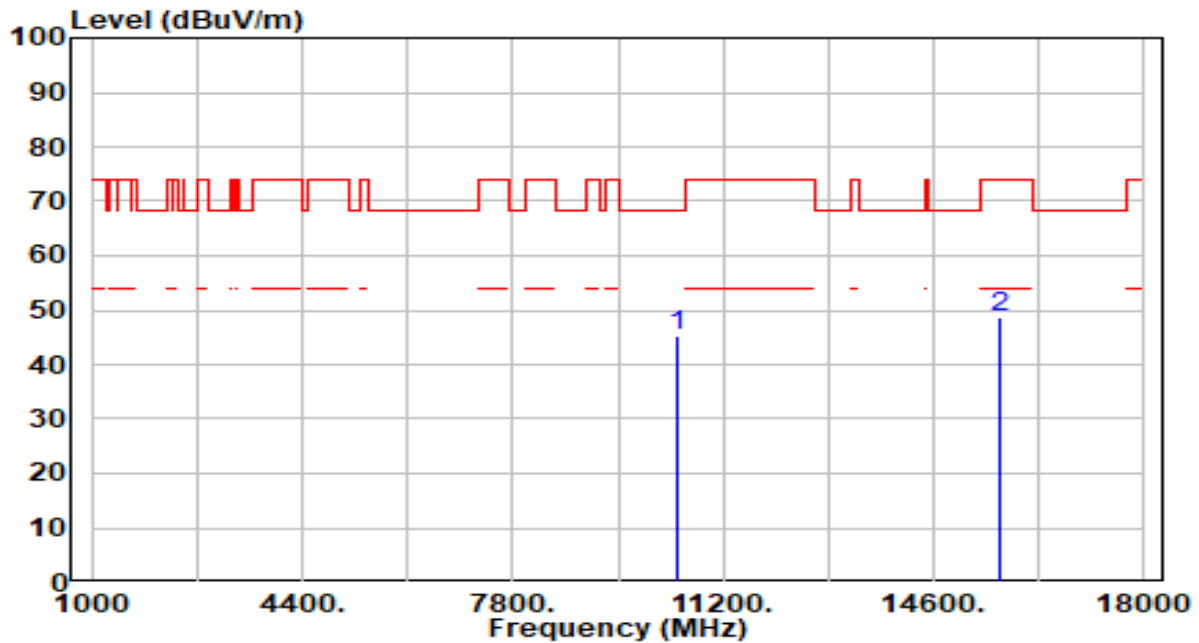


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	40.47	4.68	45.16	-23.04	68.20	100	257	Peak
2		15690.000	42.19	6.37	48.56	-25.44	74.00	100	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

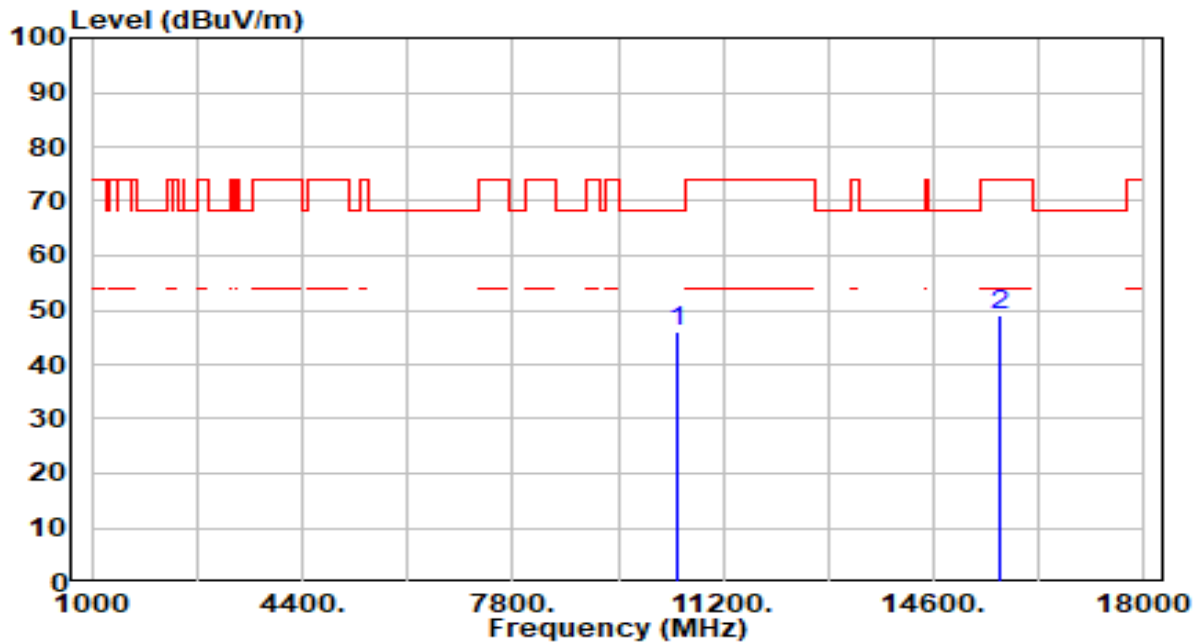


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	41.33	4.68	46.01	-22.19	68.20	100	128	Peak
2		15690.000	42.57	6.37	48.94	-25.06	74.00	100	193	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

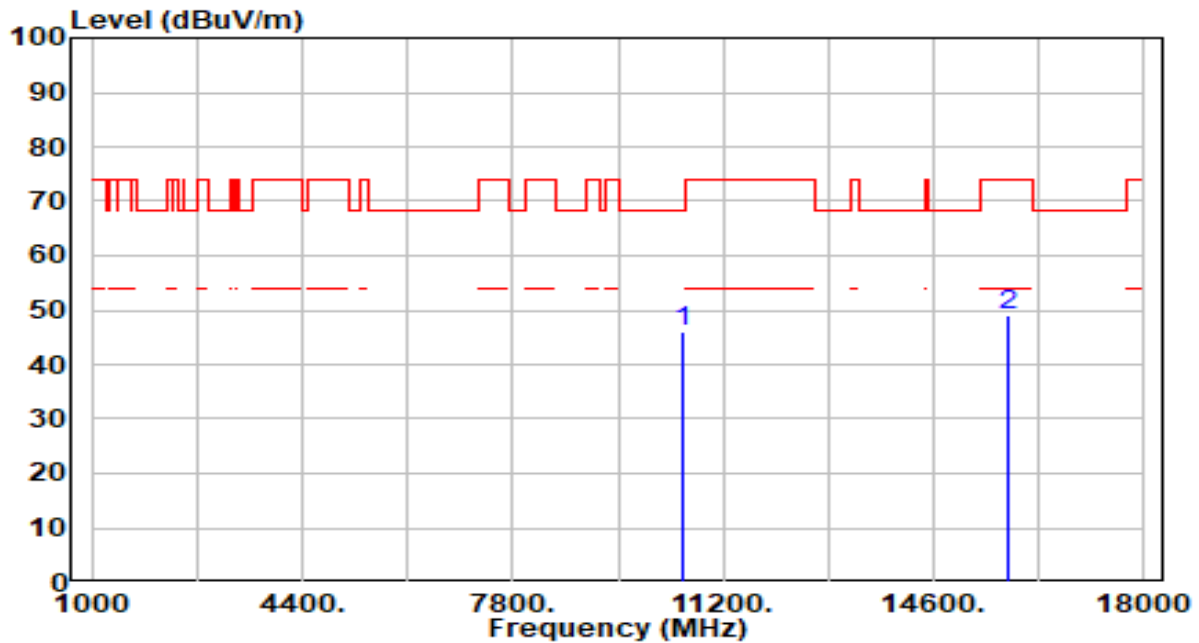


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.37	4.59	45.96	-22.24	68.20	100	172	Peak
2		15810.000	42.36	6.60	48.96	-25.04	74.00	100	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

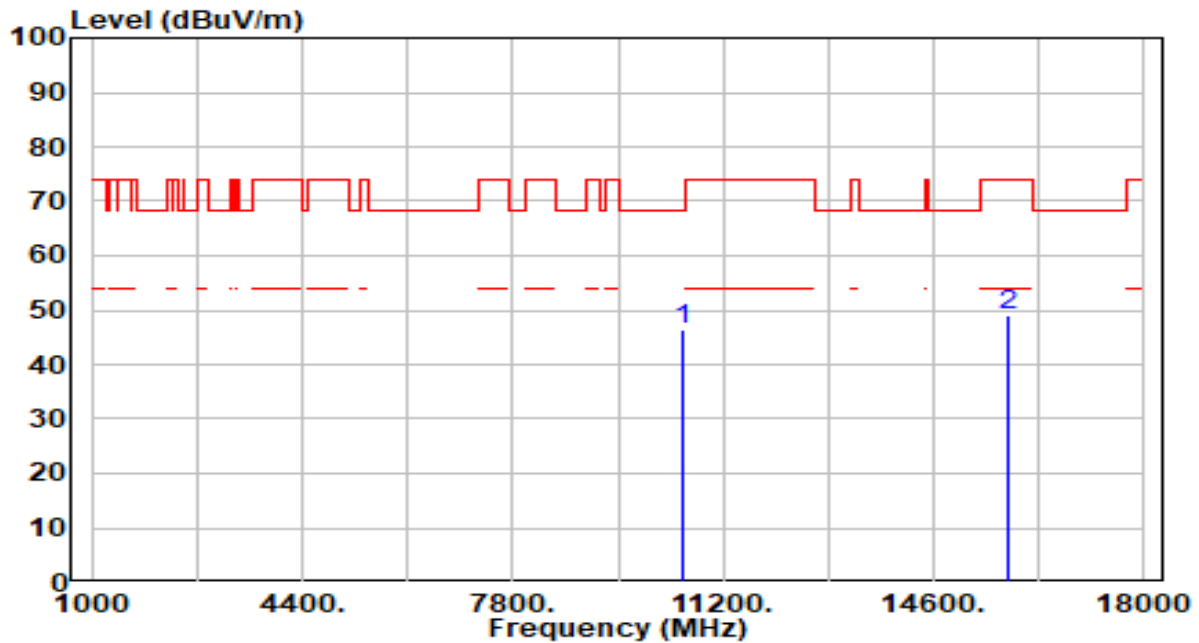


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.71	4.59	46.30	-21.90	68.20	100	168	Peak
2		15810.000	42.28	6.60	48.87	-25.13	74.00	100	24	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

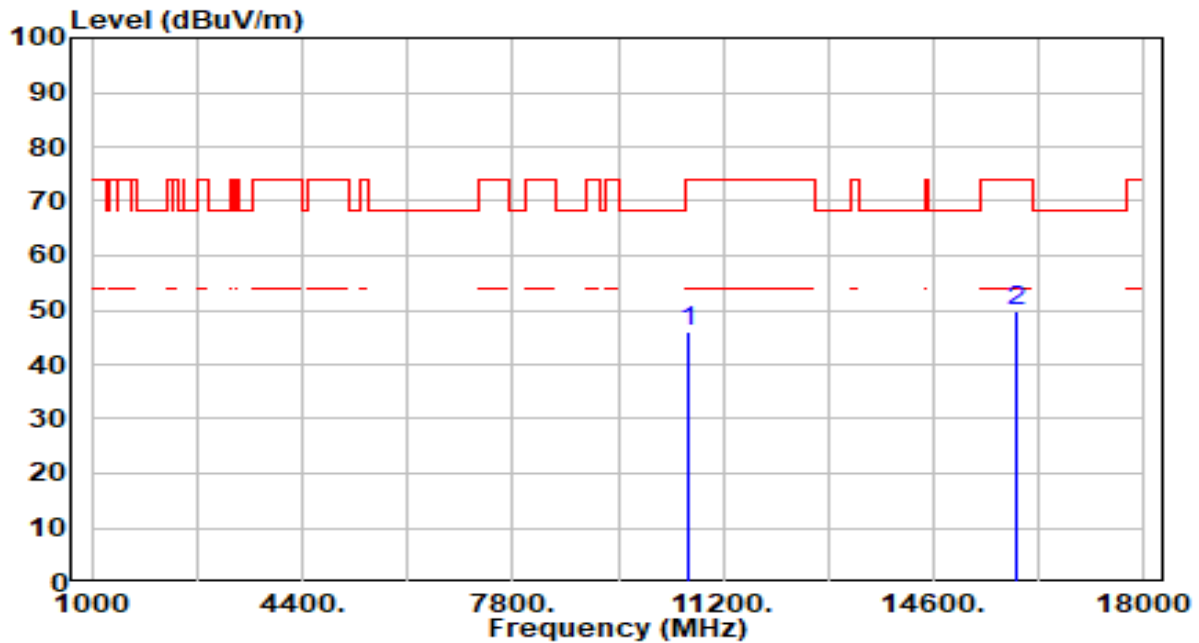


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	41.53	4.56	46.09	-27.91	74.00	100	360	Peak
2	*	15930.000	43.03	6.66	49.69	-24.31	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

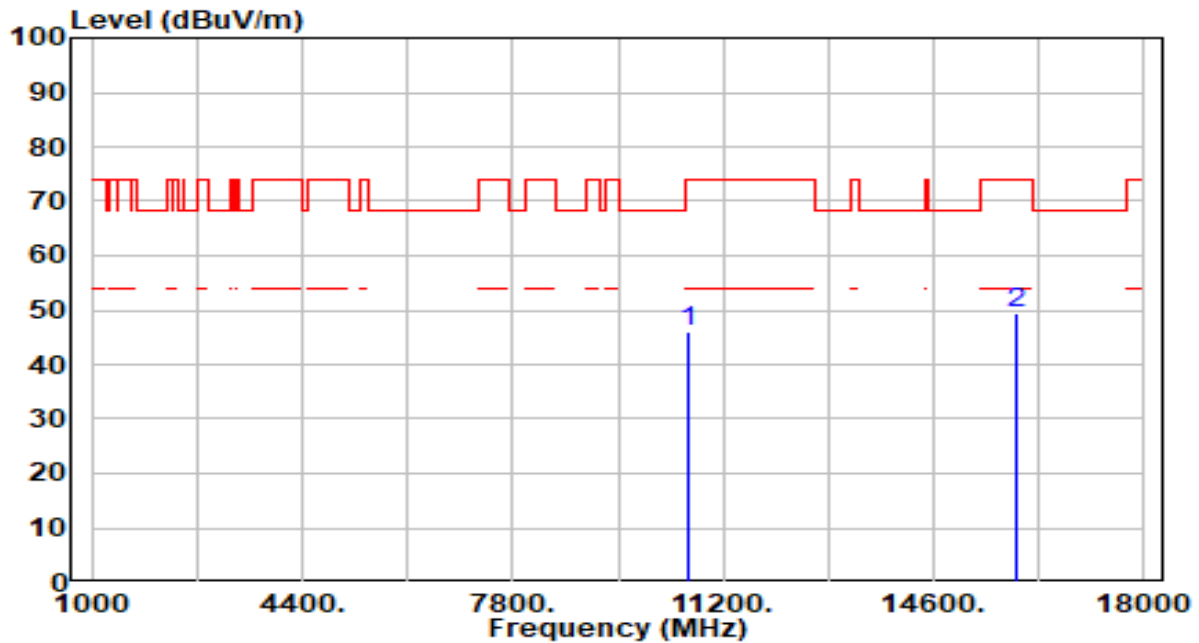


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	41.53	4.56	46.10	-27.90	74.00	100	147	Peak
2	*	15930.000	42.92	6.66	49.57	-24.43	74.00	100	117	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

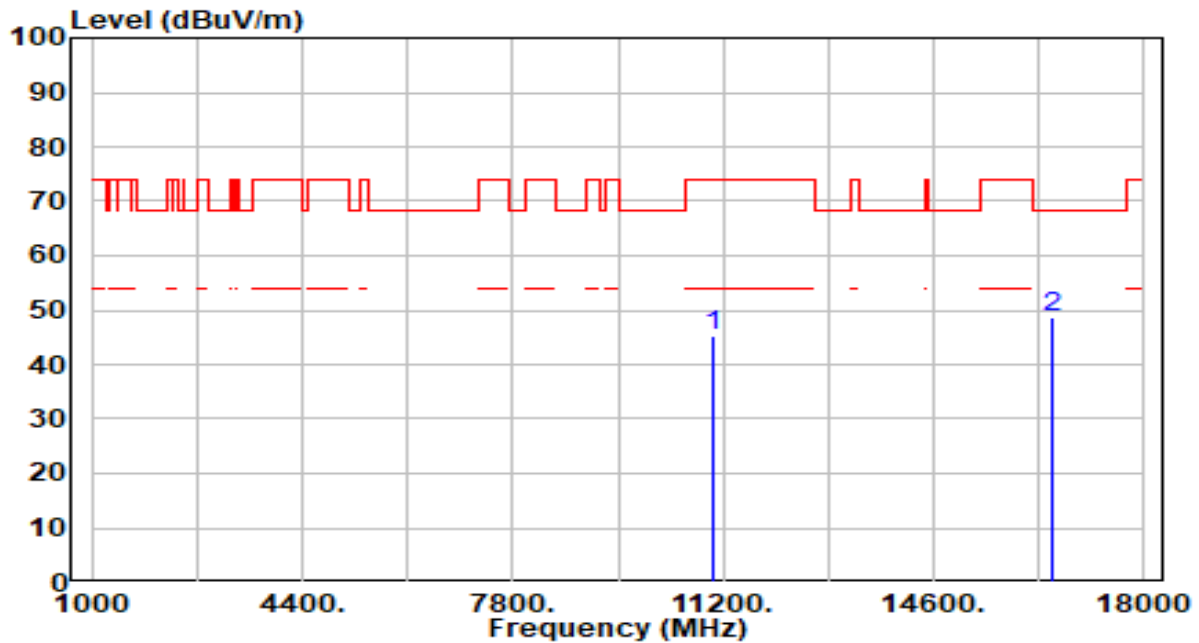


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	40.90	4.49	45.39	-28.61	74.00	100	166	Peak
2	*	16530.000	42.45	6.05	48.49	-19.71	68.20	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

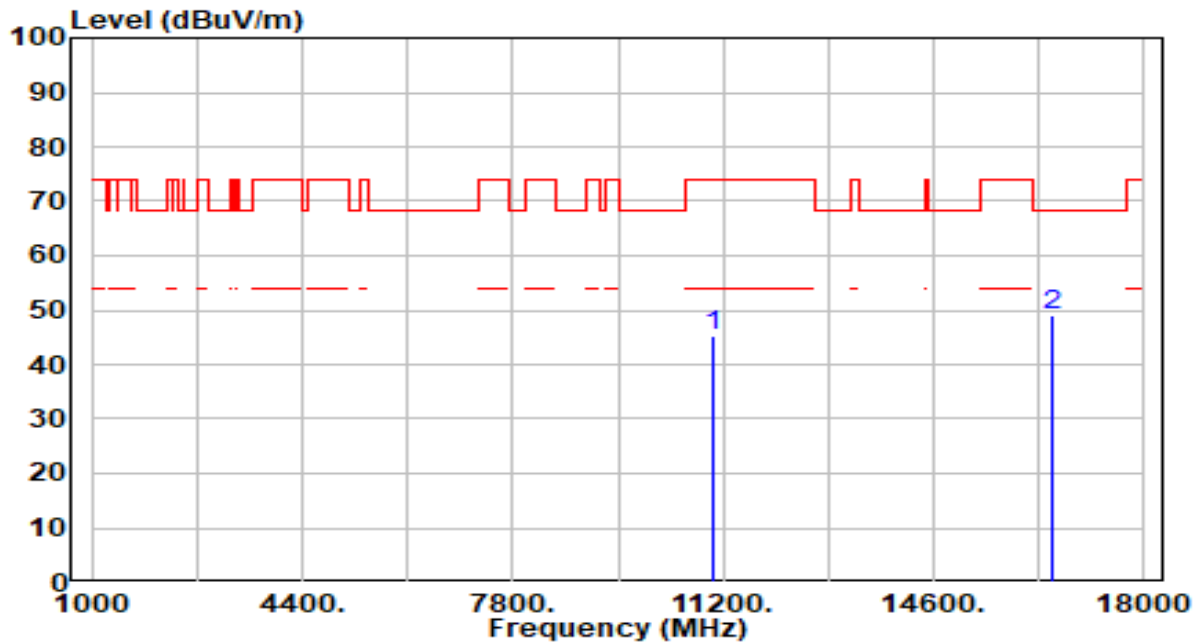


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	40.65	4.49	45.14	-28.86	74.00	100	205	Peak
2	*	16530.000	43.06	6.05	49.10	-19.10	68.20	100	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

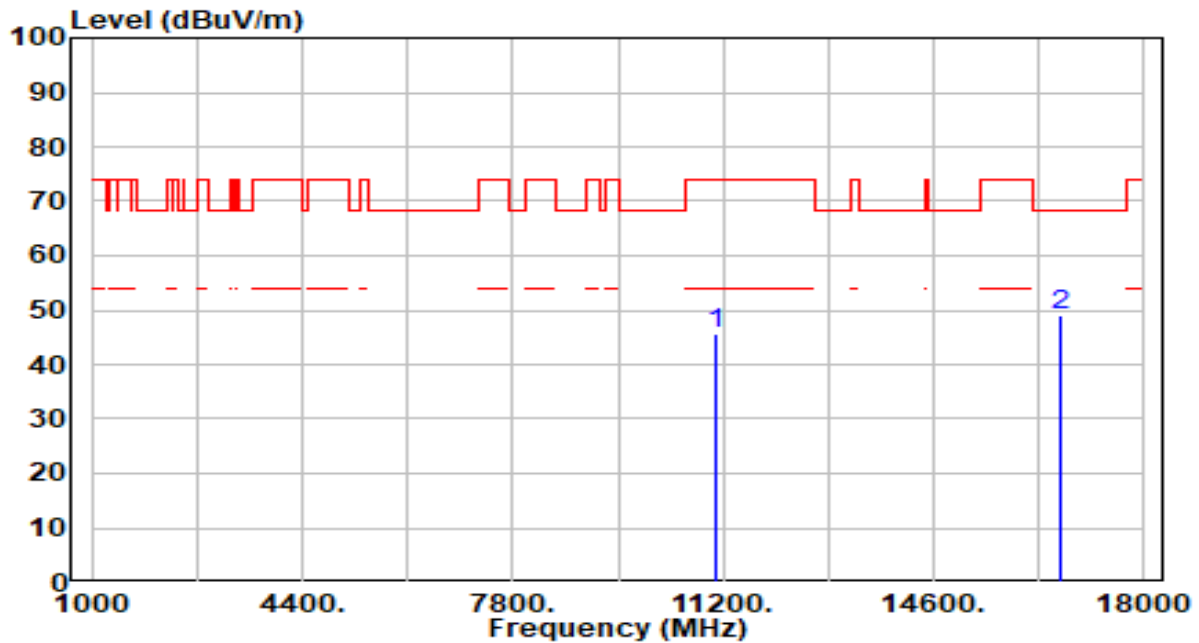


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.01	4.71	45.72	-28.28	74.00	100	234	Peak
2	*	16650.000	42.99	6.00	48.99	-19.21	68.20	100	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

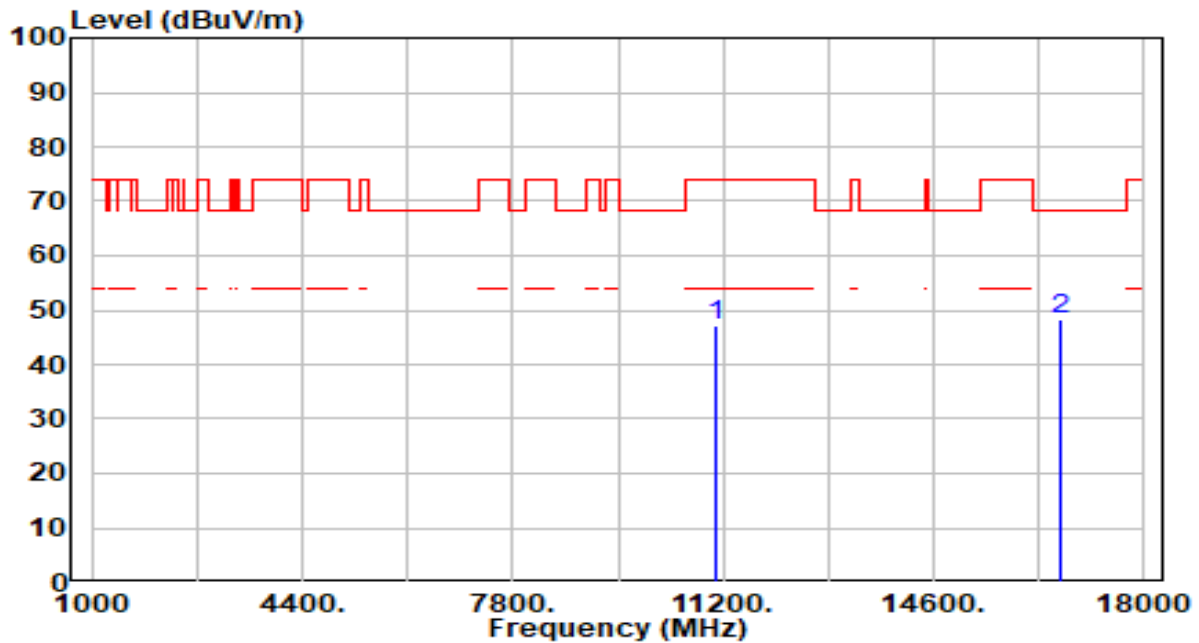


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	42.30	4.71	47.01	-26.99	74.00	100	320	Peak
2	*	16650.000	42.31	6.00	48.30	-19.90	68.20	100	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

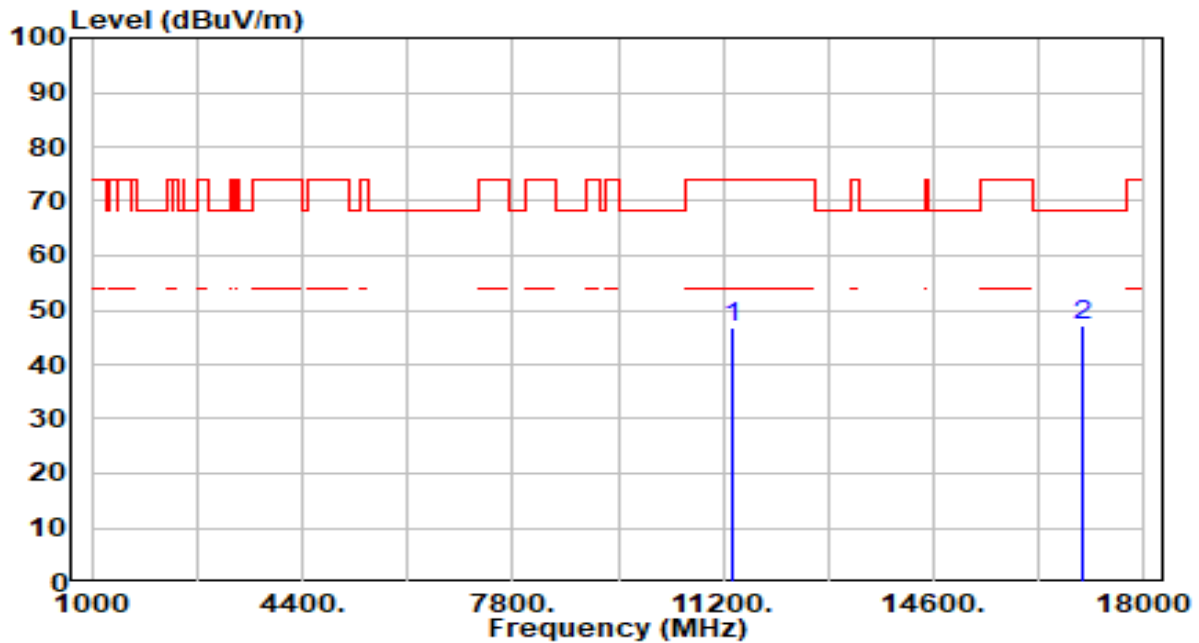


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.60	5.14	46.74	-27.26	74.00	100	248	Peak
2	*	17010.000	41.38	5.74	47.12	-21.08	68.20	100	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

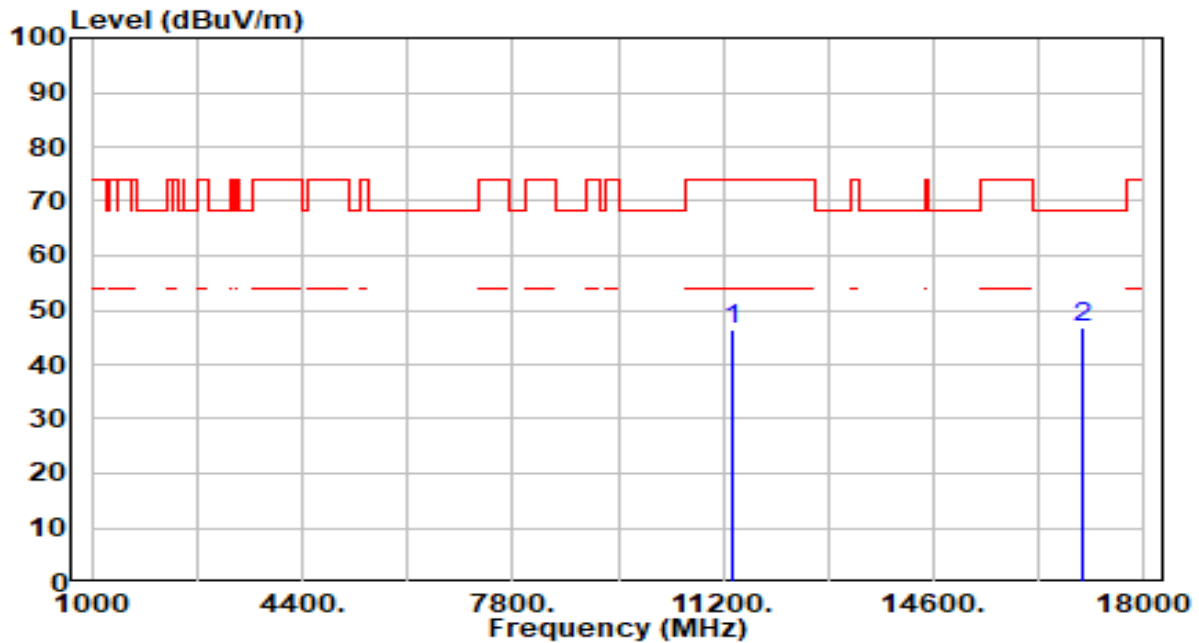


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.12	5.14	46.26	-27.74	74.00	100	185	Peak
2	*	17010.000	41.21	5.74	46.95	-21.25	68.20	100	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

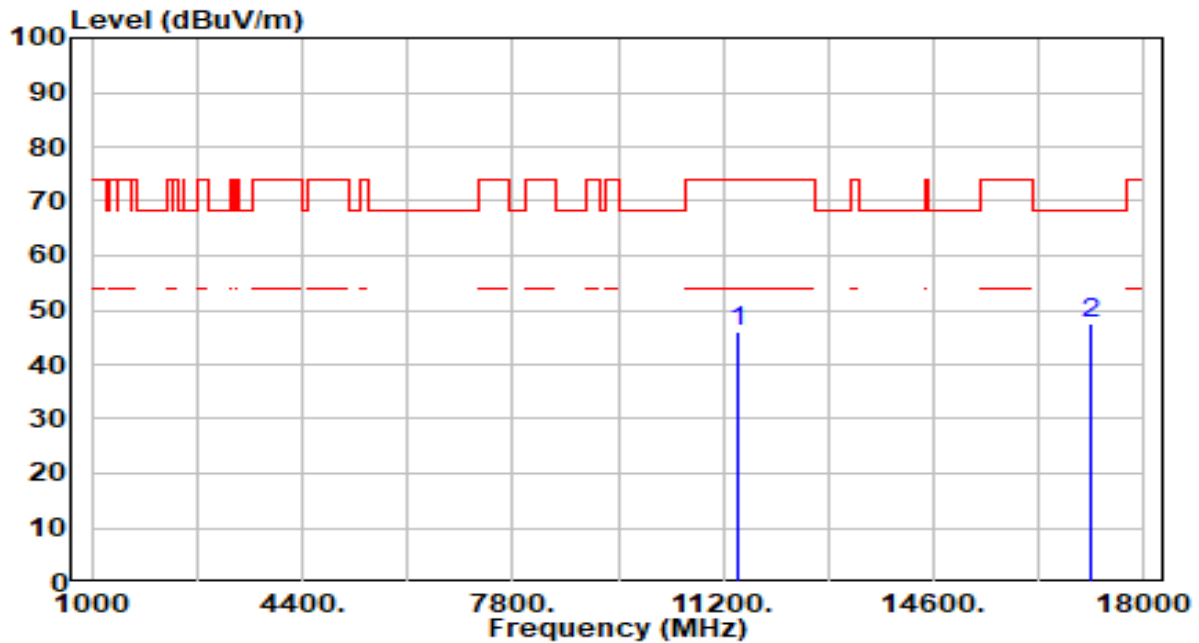


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	40.73	5.23	45.96	-28.04	74.00	100	322	Peak
2	*	17130.000	41.95	5.48	47.42	-20.78	68.20	100	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

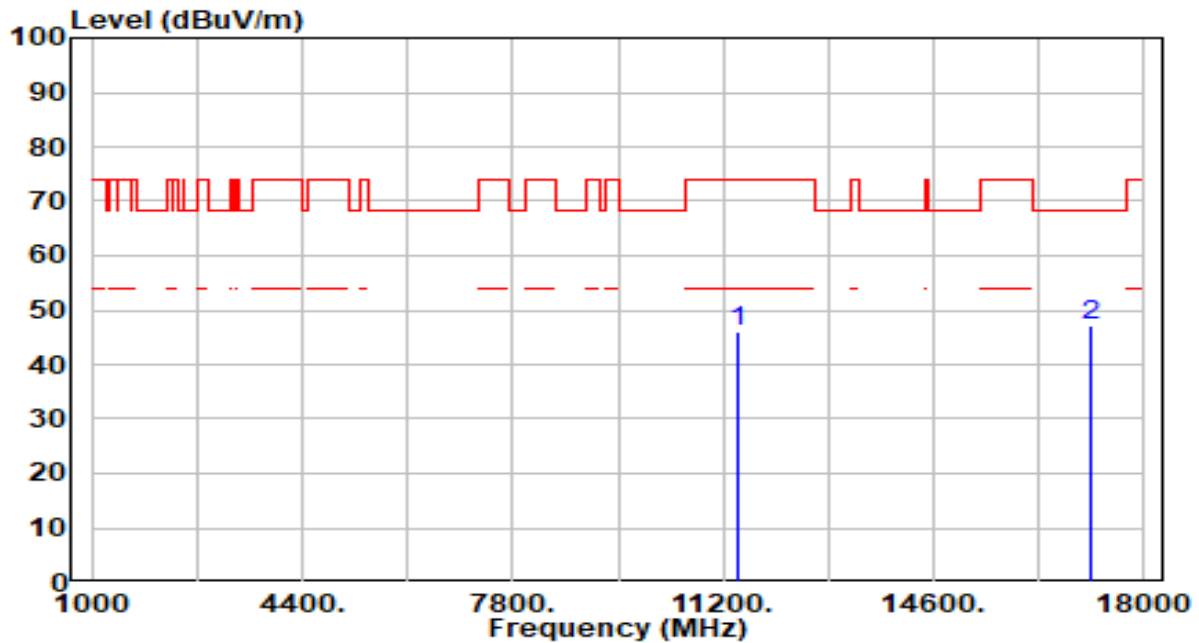


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	40.87	5.23	46.10	-27.90	74.00	100	0	Peak
2	*	17130.000	41.85	5.48	47.33	-20.87	68.20	100	29	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

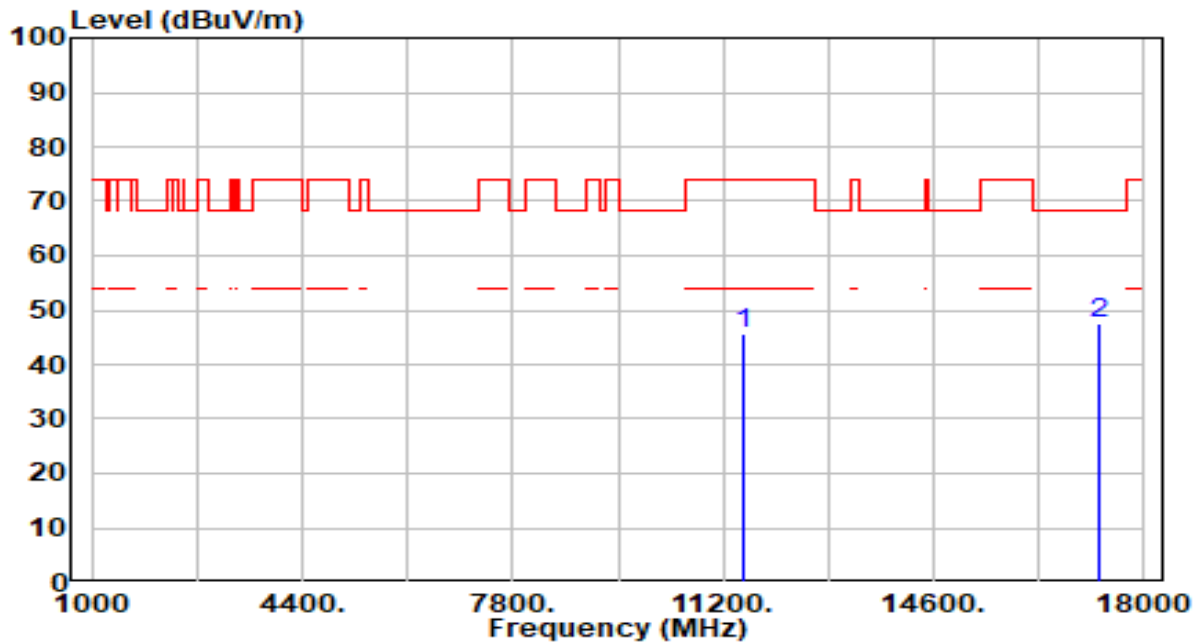


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	40.52	5.29	45.81	-28.19	74.00	100	240	Peak
2	*	17265.000	42.34	5.18	47.52	-20.68	68.20	100	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

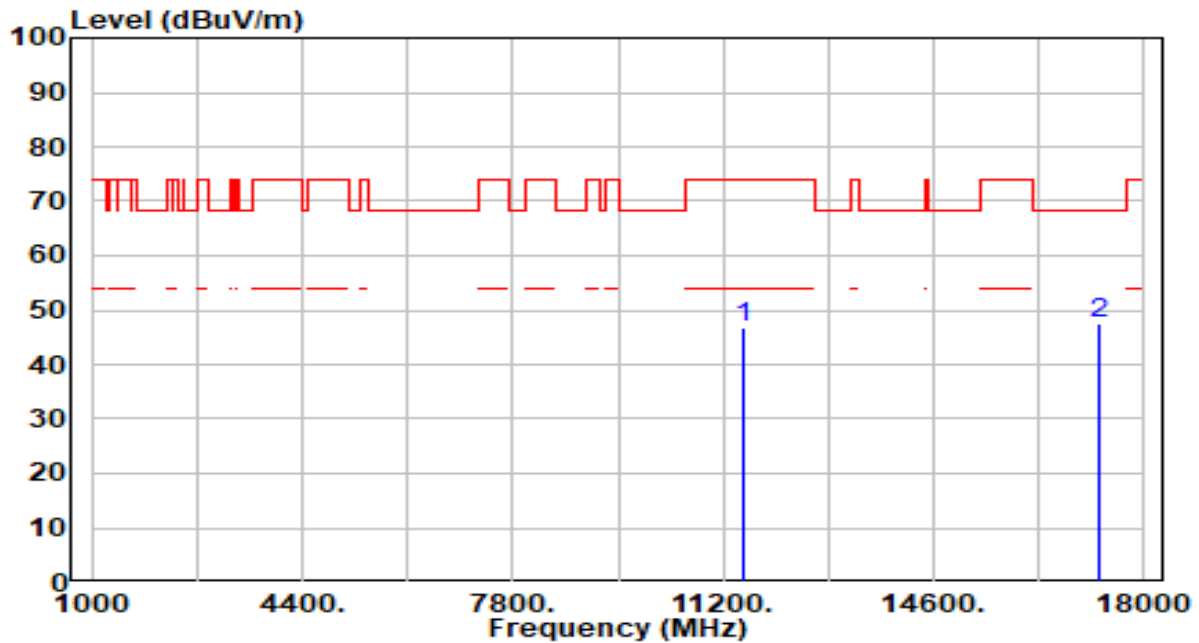


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	41.38	5.29	46.67	-27.33	74.00	100	360	Peak
2	*	17265.000	42.44	5.18	47.62	-20.58	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

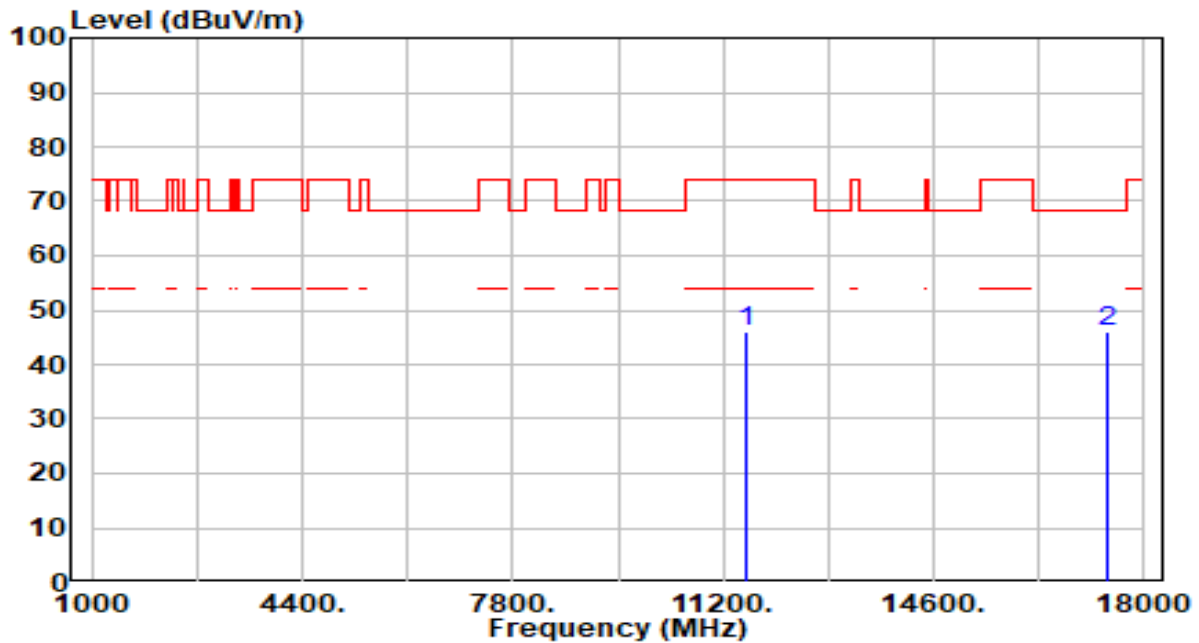


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	40.80	5.37	46.17	-27.83	74.00	100	155	Peak
2	*	17385.000	41.11	4.92	46.03	-22.17	68.20	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

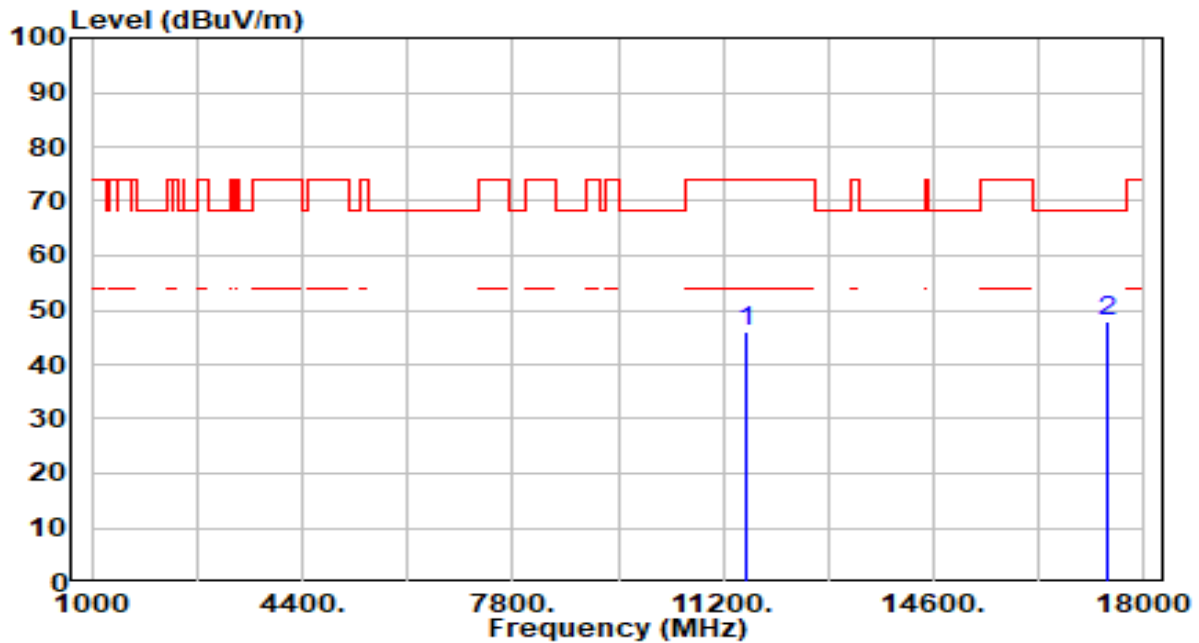


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	40.86	5.37	46.22	-27.78	74.00	100	301	Peak
2	*	17385.000	43.01	4.92	47.93	-20.27	68.20	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

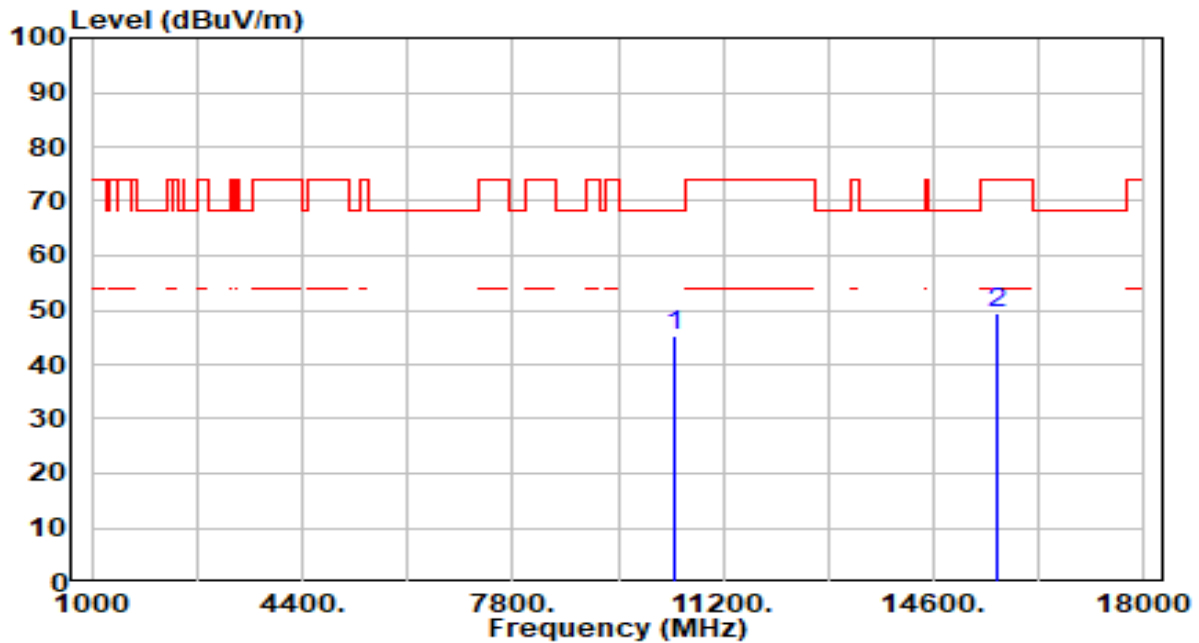


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.65	4.74	45.39	-22.81	68.20	100	266	Peak
2		15630.000	43.30	6.25	49.55	-24.45	74.00	100	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

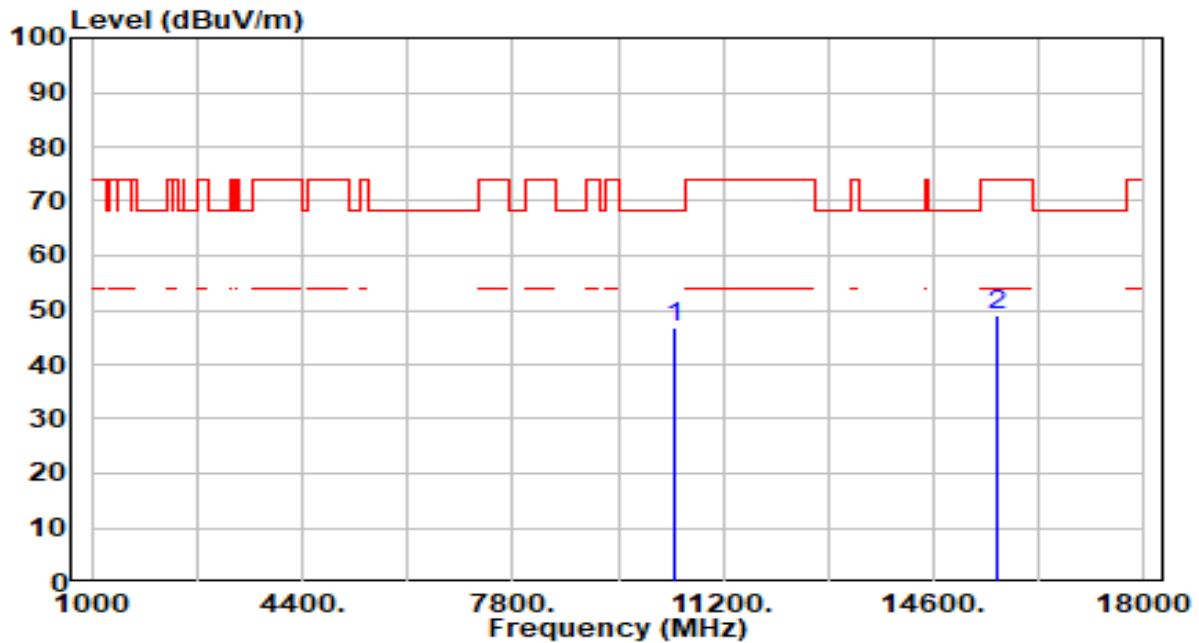


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.01	4.74	46.75	-21.45	68.20	100	259	Peak
2		15630.000	42.66	6.25	48.92	-25.08	74.00	100	307	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

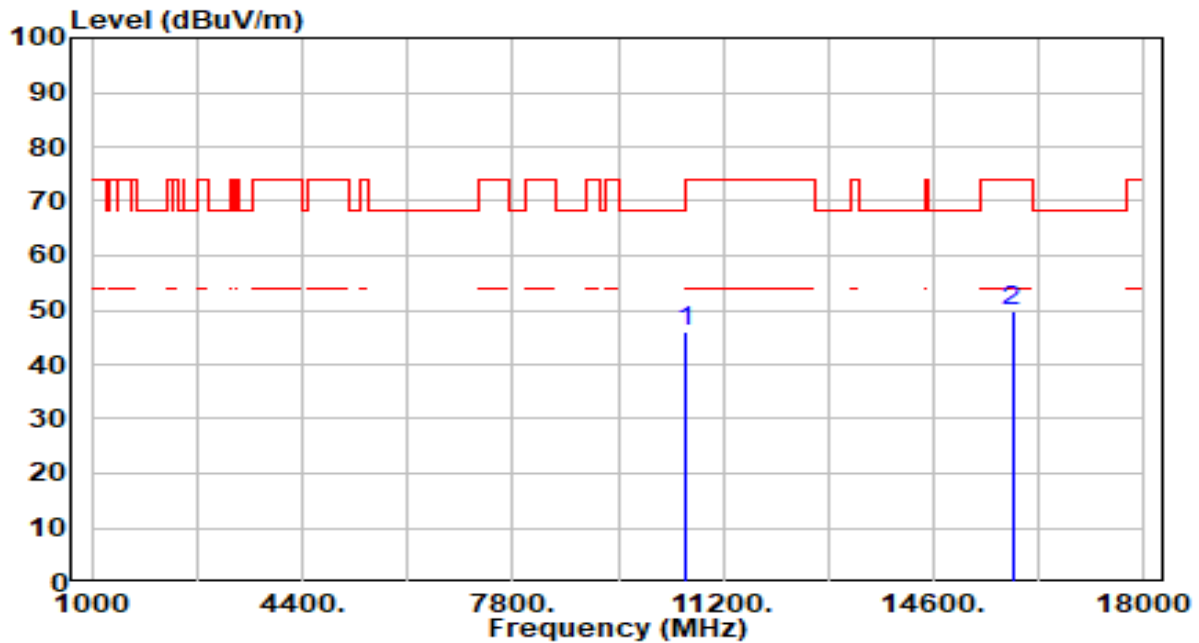


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.51	4.56	46.08	-22.12	68.20	100	0	Peak
2		15870.000	43.29	6.63	49.91	-24.09	74.00	100	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

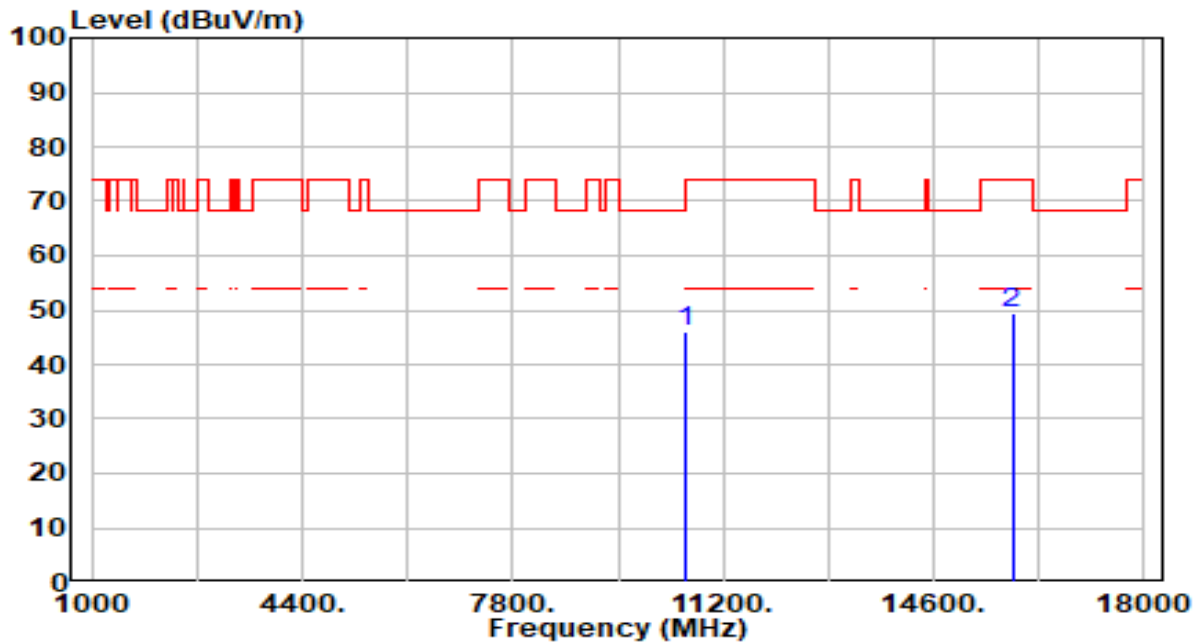


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.57	4.56	46.13	-22.07	68.20	100	100	Peak
2		15870.000	42.71	6.63	49.33	-24.67	74.00	100	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

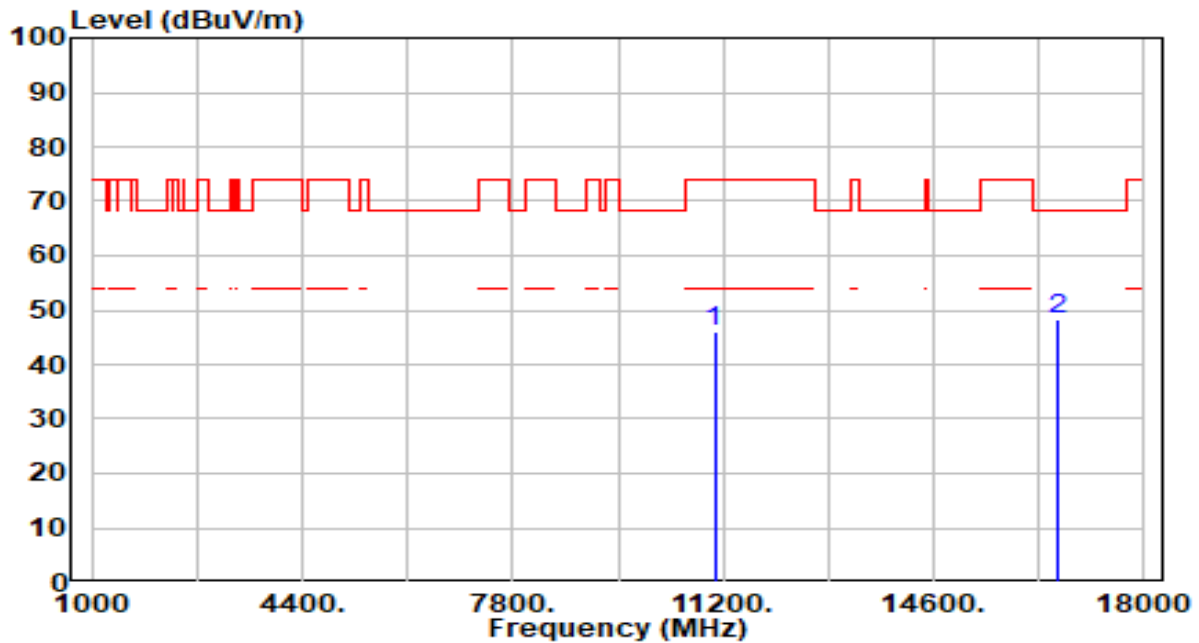


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	41.52	4.60	46.13	-27.87	74.00	100	303	Peak
2	*	16590.000	42.27	6.00	48.27	-19.93	68.20	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

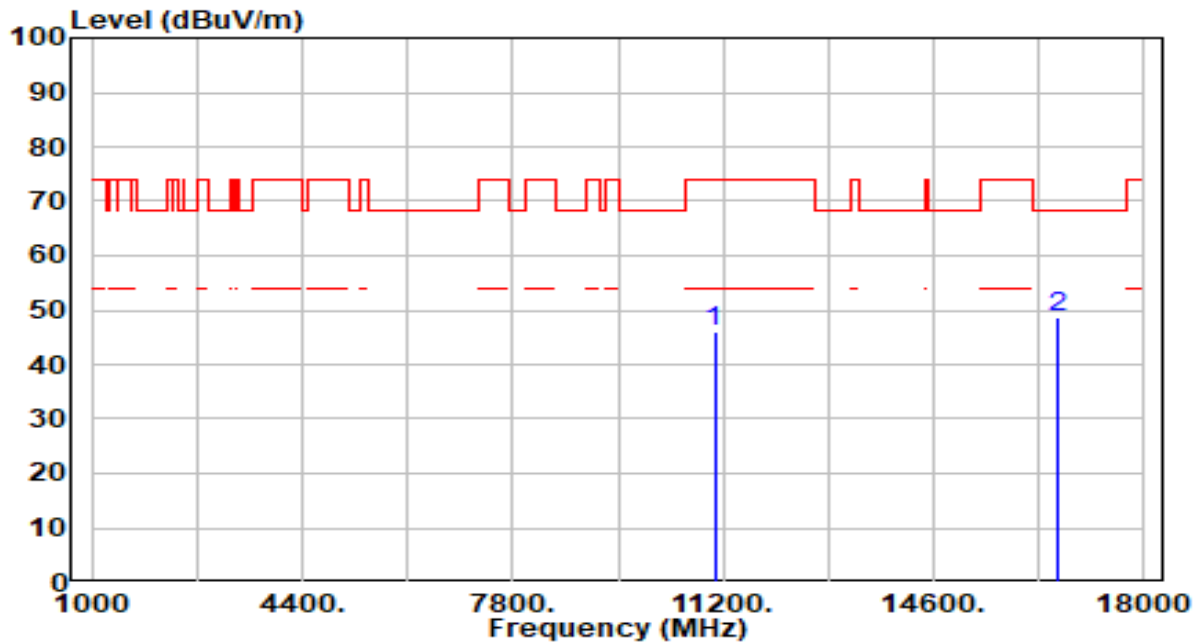


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	41.27	4.60	45.87	-28.13	74.00	100	360	Peak
2	*	16590.000	42.60	6.00	48.59	-19.61	68.20	100	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

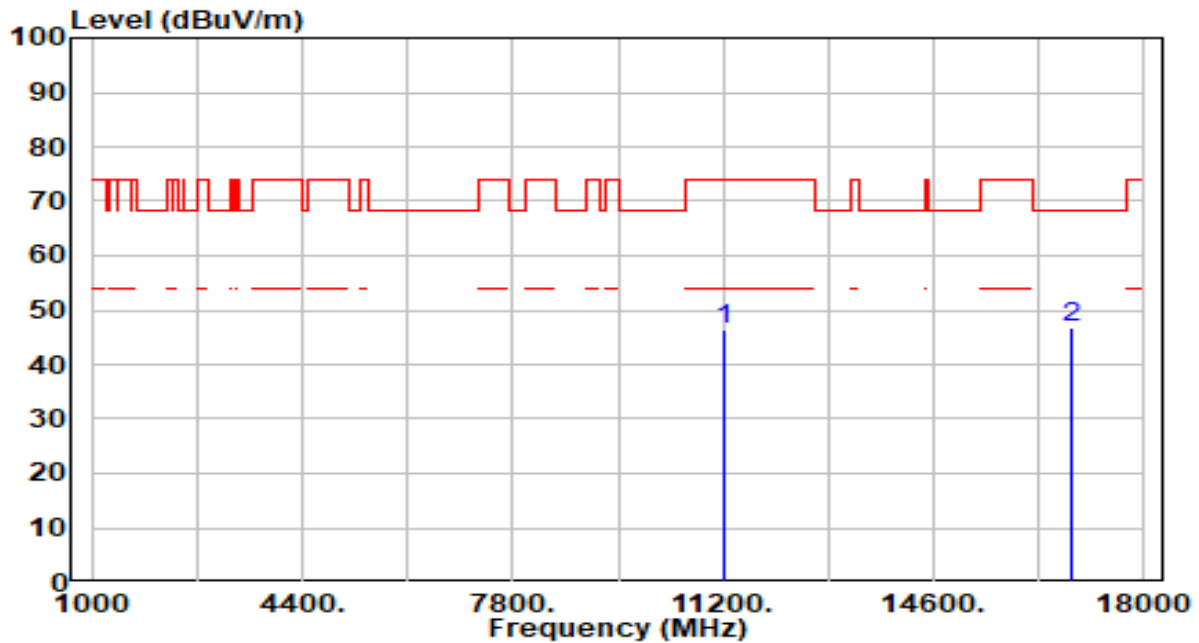


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	41.46	5.00	46.46	-27.54	74.00	100	39	Peak
2	*	16830.000	40.64	5.98	46.62	-21.58	68.20	100	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

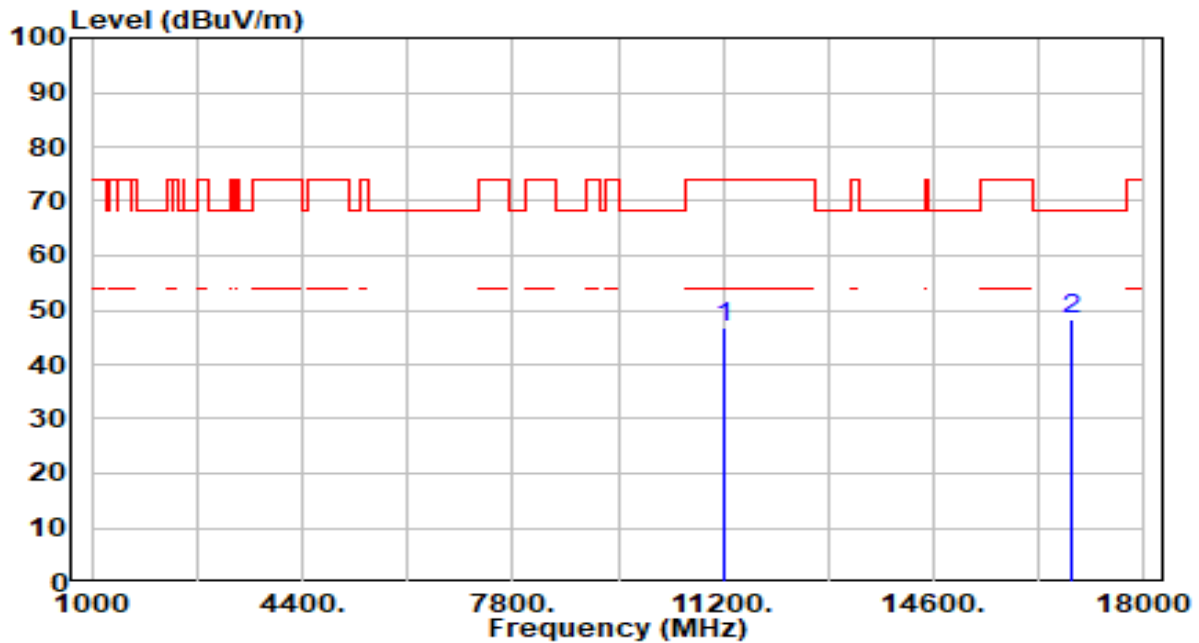


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	41.64	5.00	46.65	-27.35	74.00	100	205	Peak
2	*	16830.000	42.42	5.98	48.41	-19.79	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

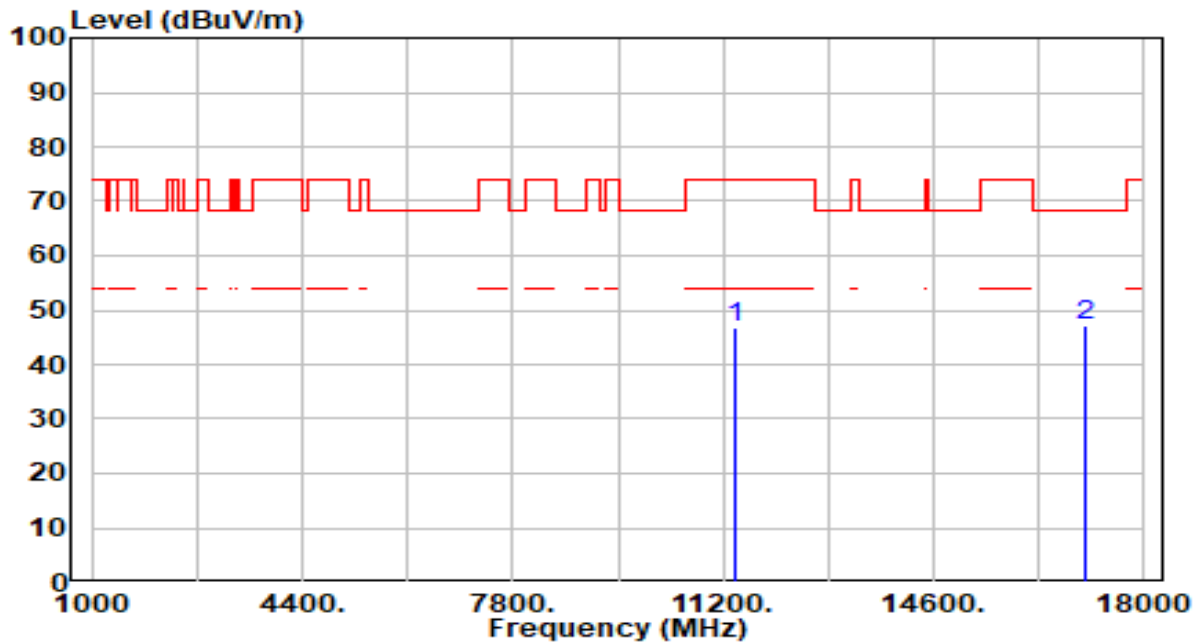


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.54	5.19	46.73	-27.27	74.00	100	226	Peak
2	*	17070.000	41.61	5.61	47.22	-20.98	68.20	100	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

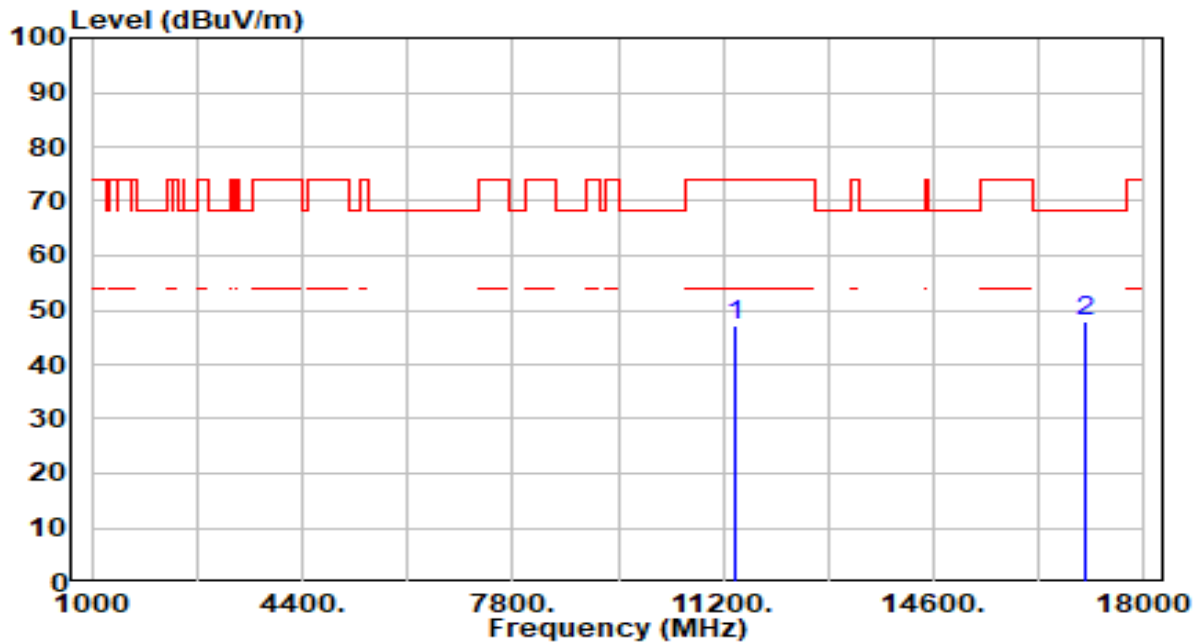


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	42.16	5.19	47.36	-26.64	74.00	100	81	Peak
2	*	17070.000	42.45	5.61	48.06	-20.14	68.20	100	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

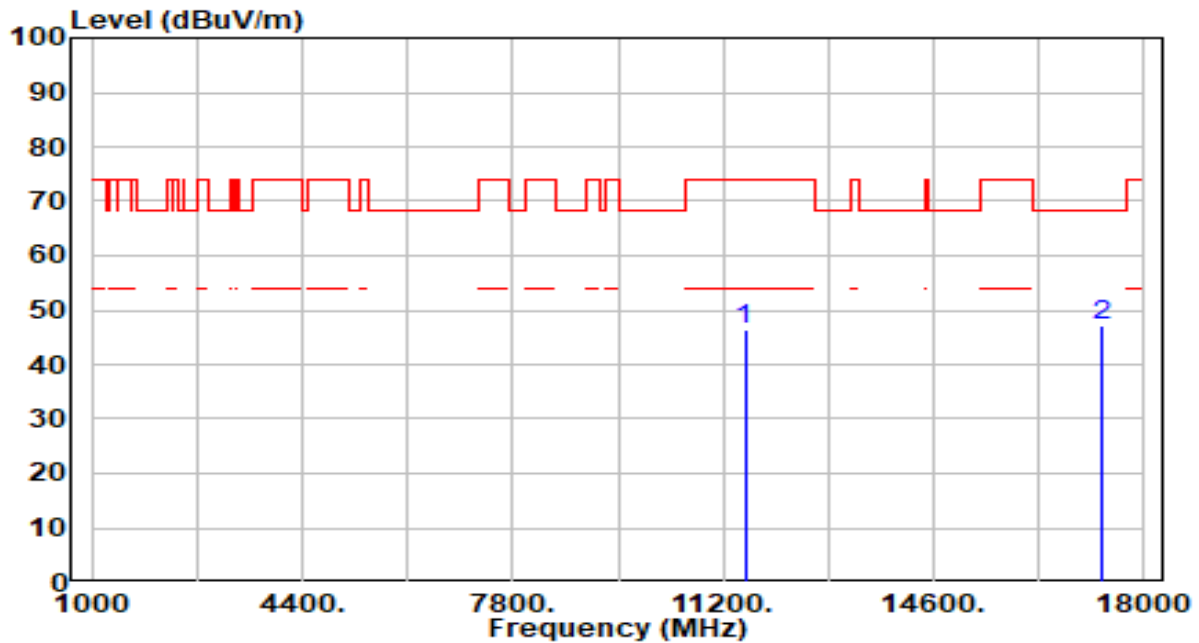


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	40.93	5.33	46.26	-27.74	74.00	100	96	Peak
2	*	17325.000	42.17	5.05	47.22	-20.98	68.20	100	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

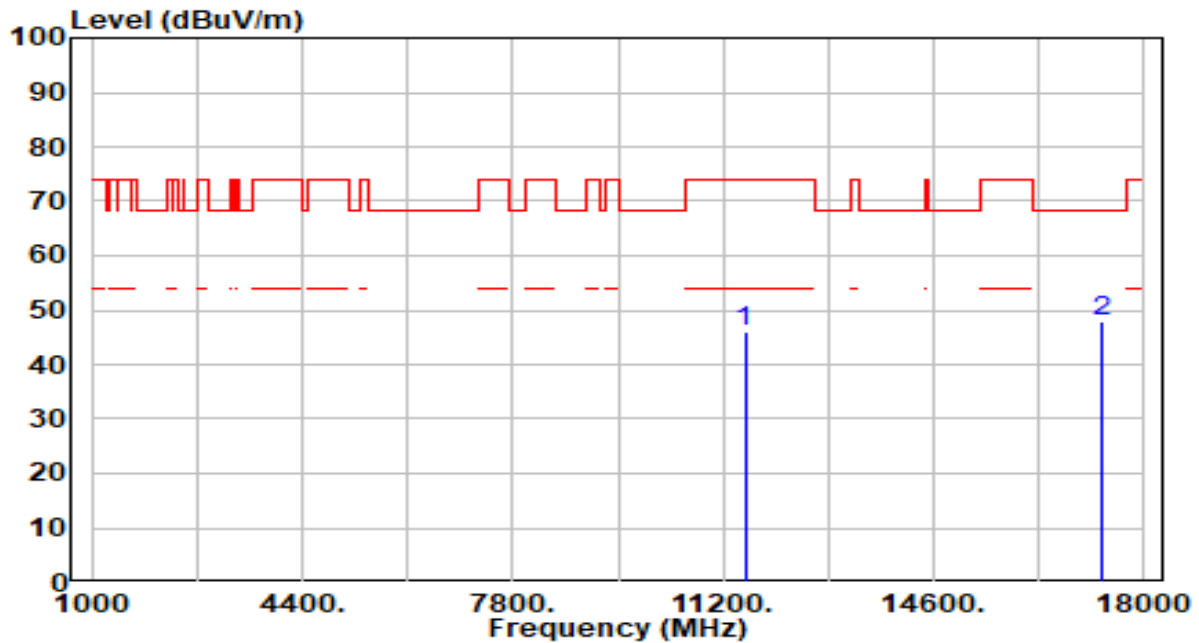


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	40.84	5.33	46.17	-27.83	74.00	100	225	Peak
2	*	17325.000	42.86	5.05	47.91	-20.29	68.20	100	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

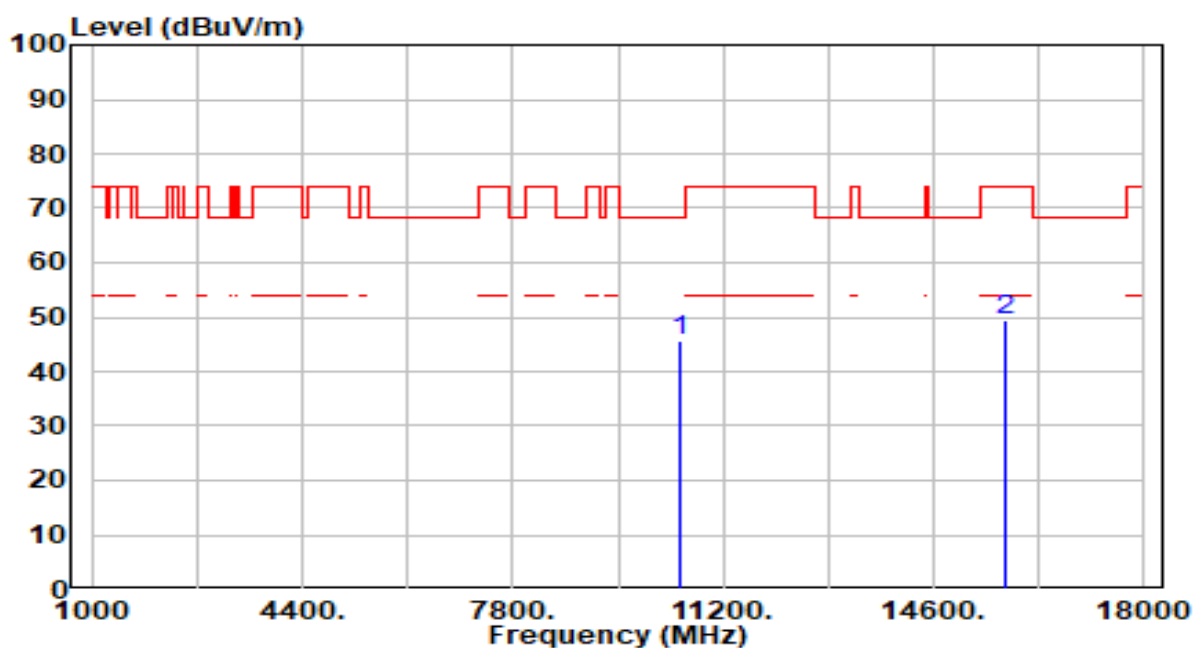


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.22	4.62	45.84	-22.36	68.20	100	356	Peak
2		15750.000	42.89	6.49	49.38	-24.62	74.00	100	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

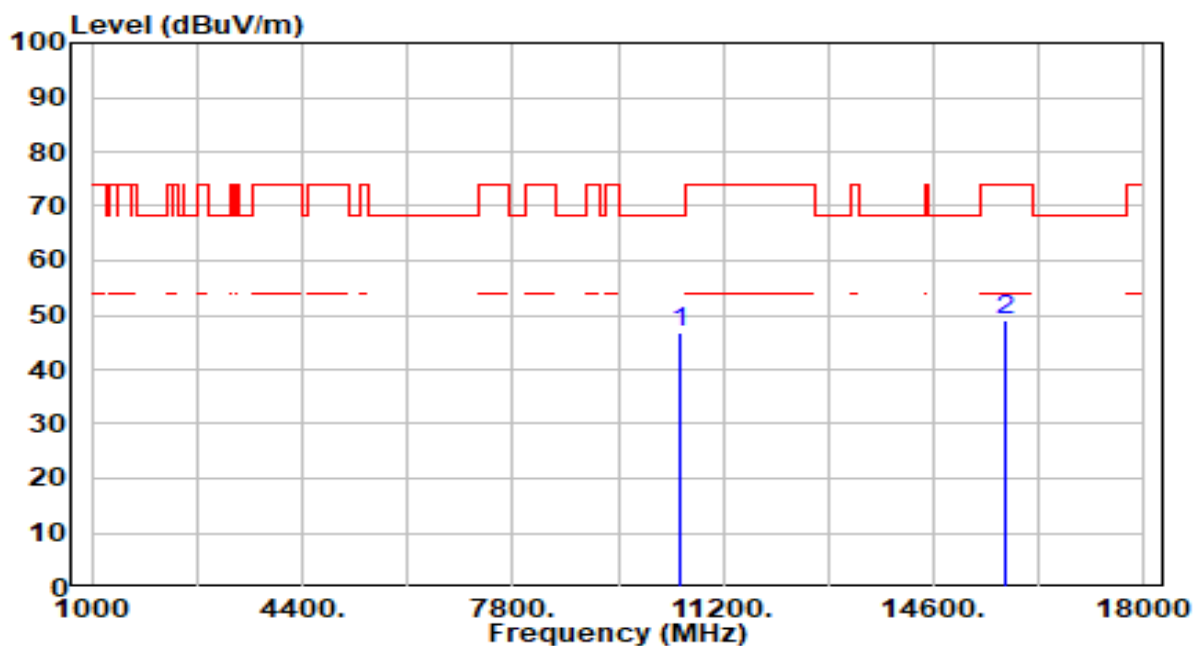


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	42.35	4.62	46.97	-21.23	68.20	100	270	Peak
2		15750.000	42.75	6.49	49.24	-24.76	74.00	100	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

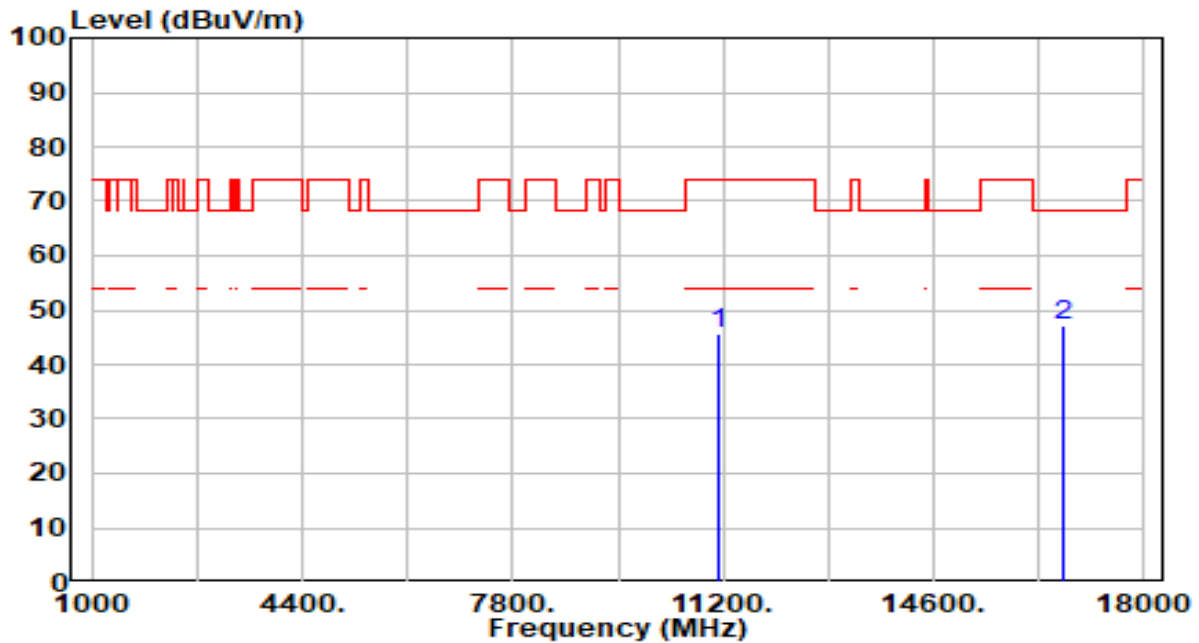


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.00	4.82	45.81	-28.19	74.00	100	19	Peak
2	*	16710.000	41.12	6.01	47.13	-21.07	68.20	100	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2025-01-02
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

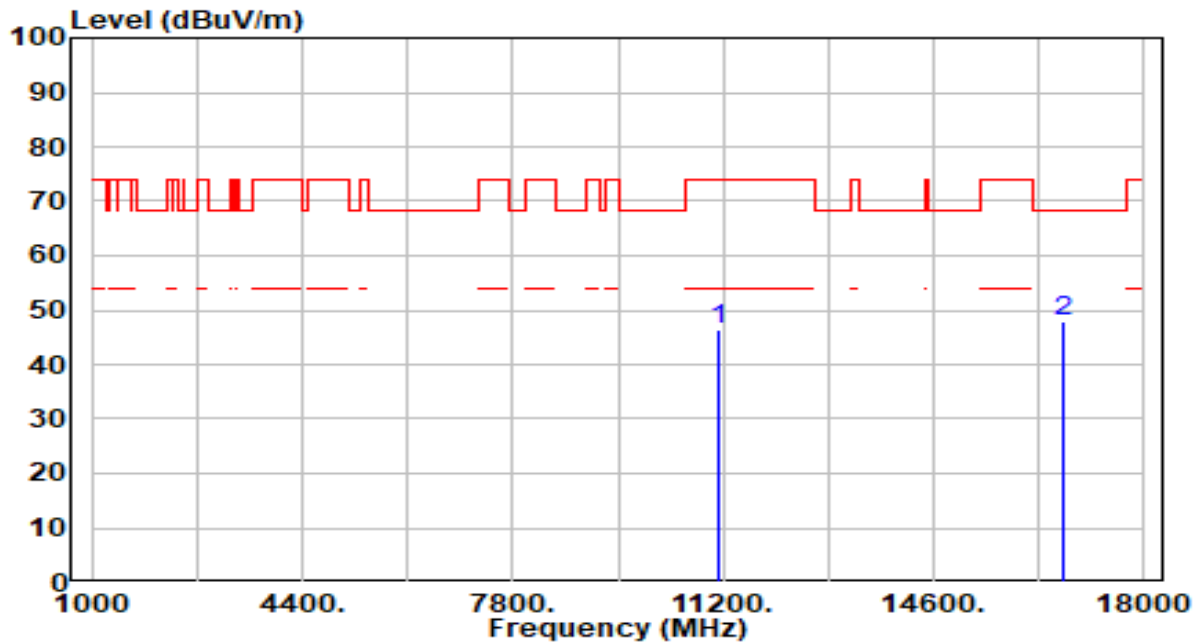


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.47	4.82	46.28	-27.72	74.00	100	111	Peak
2	*	16710.000	41.82	6.01	47.83	-20.37	68.20	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

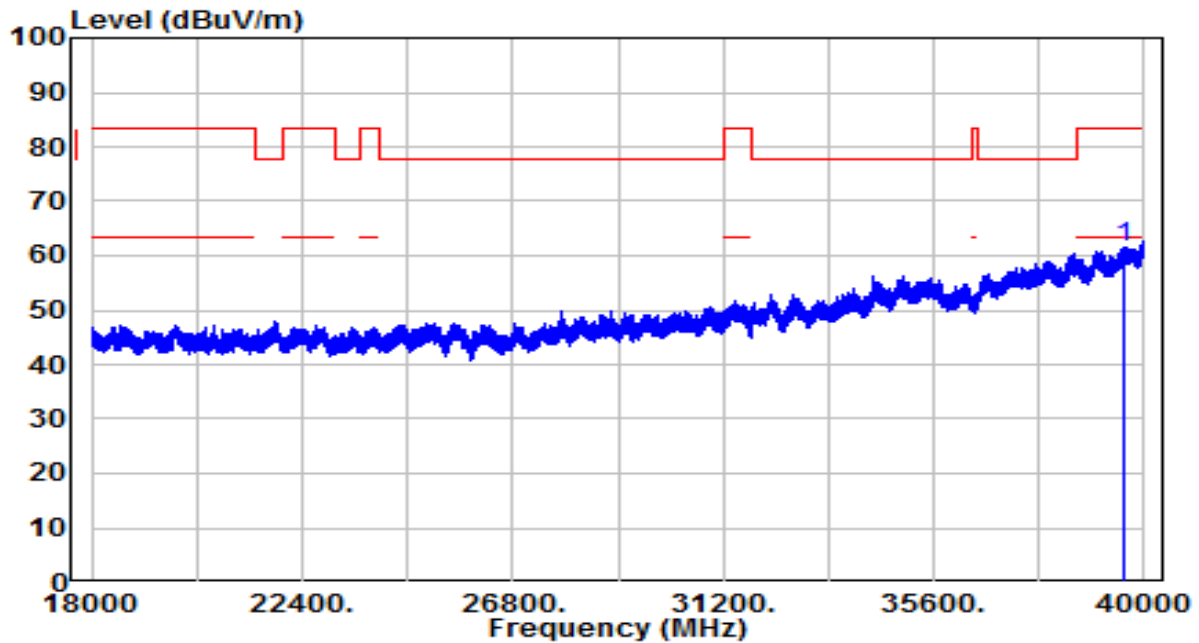


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39582.690	35.58	25.79	61.37	-22.13	83.50	150	250	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

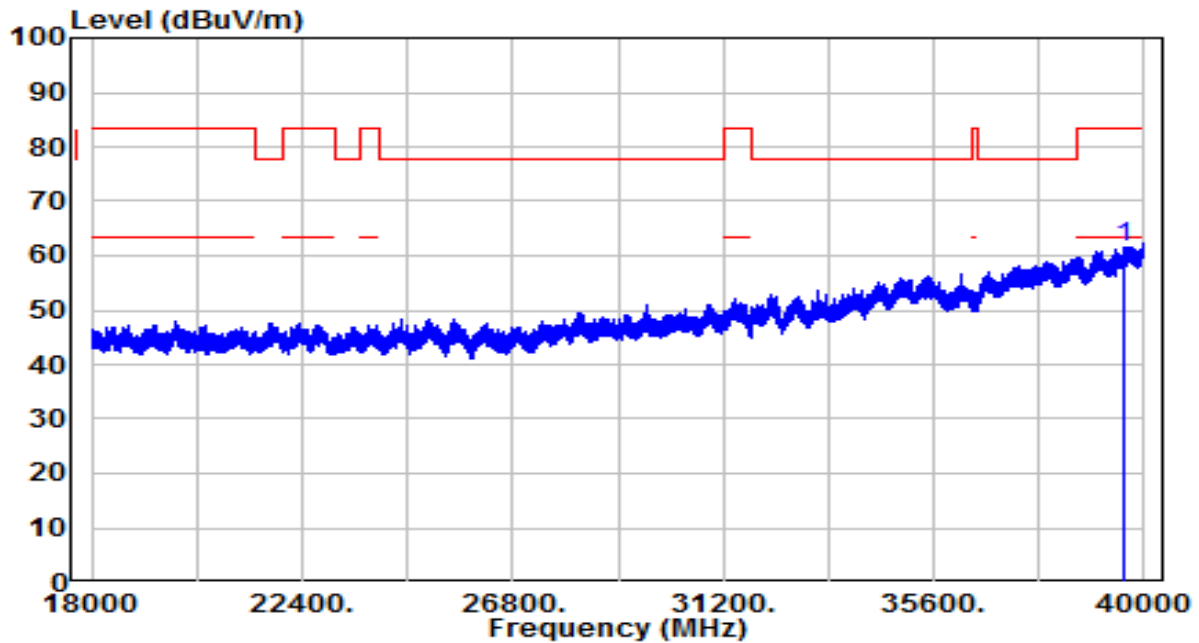

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39550.380	35.84	25.72	61.57	-21.93	83.50	150	93	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing

linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2.Test Procedure Used

KDB 789033 D02v02r01- Section G

7.9.3.Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW $\leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4.Test Setup

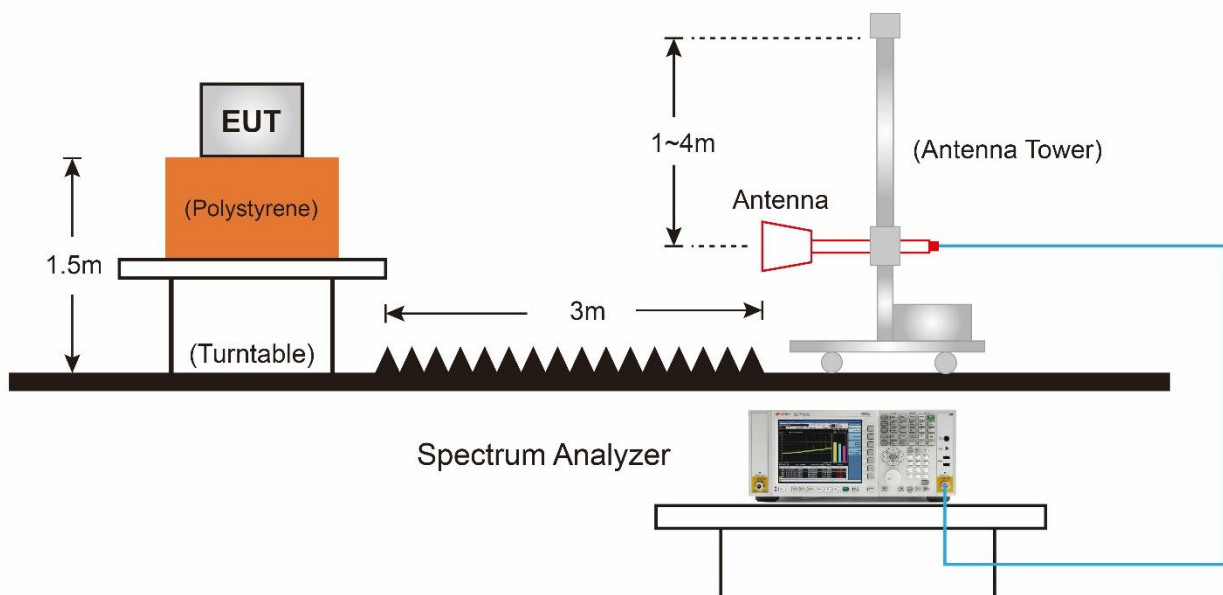

7.9.5.Test Result

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

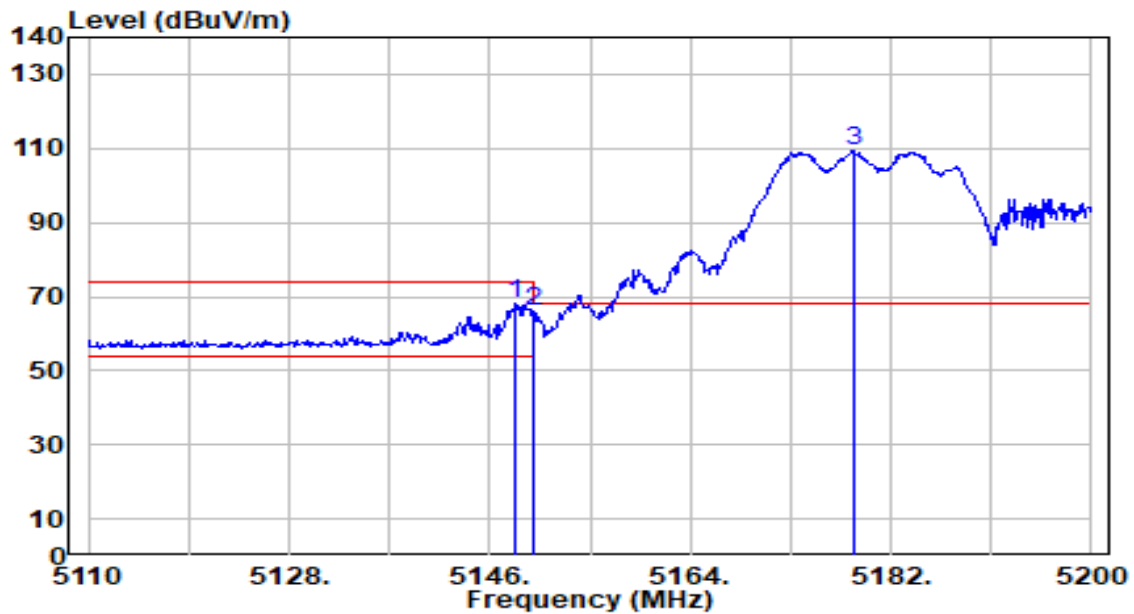


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.340	67.51	0.65	68.16	-5.84	74.00	150	10	Peak
2		5150.000	65.28	0.65	65.93	-8.07	74.00	150	10	Peak
3		5178.670	108.67	0.68	109.35	N/A	N/A	150	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

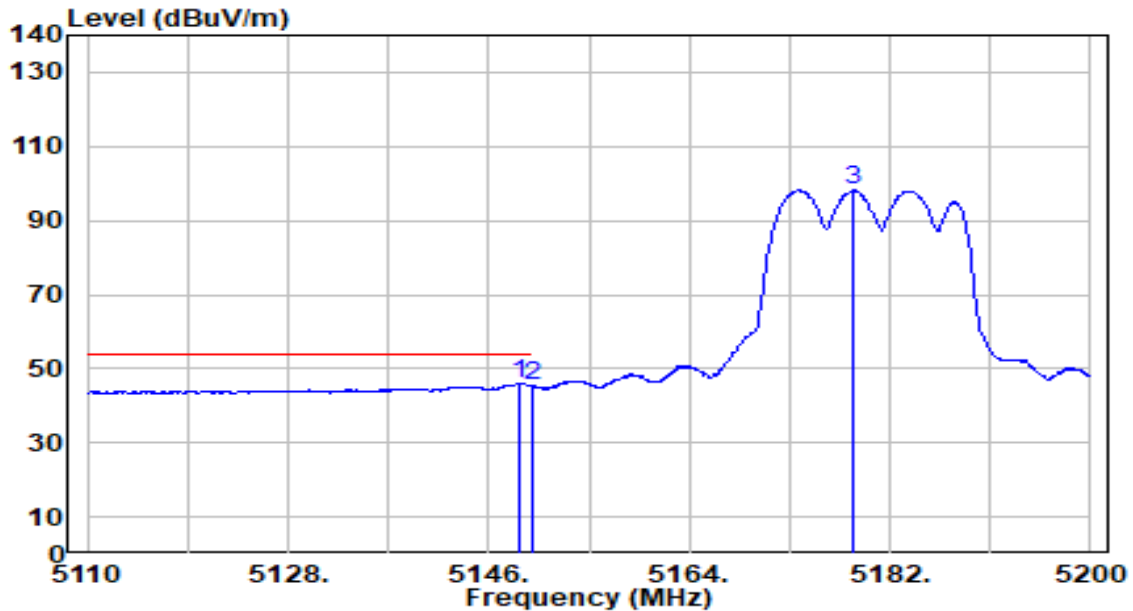


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	45.29	0.65	45.95	-8.05	54.00	150	10	Average
2		5150.000	44.61	0.65	45.26	-8.74	54.00	150	10	Average
3		5178.760	97.48	0.68	98.17	N/A	N/A	150	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

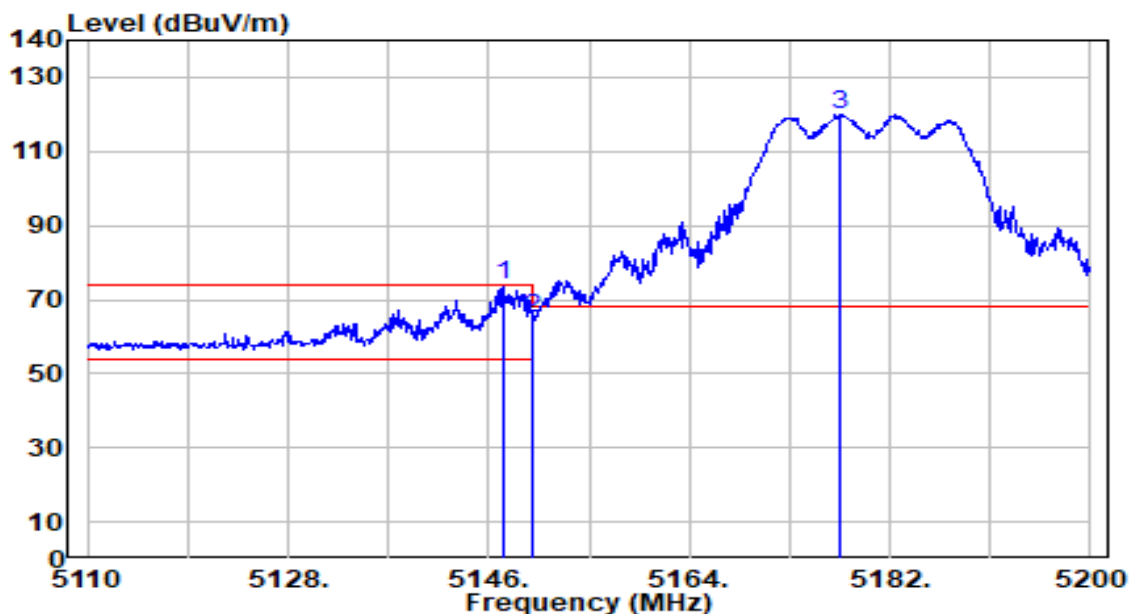


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.350	73.15	0.65	73.80	-0.20	74.00	136	358	Peak
2		5150.000	64.09	0.65	64.74	-9.26	74.00	136	358	Peak
3		5177.590	119.21	0.68	119.89	N/A	N/A	136	358	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

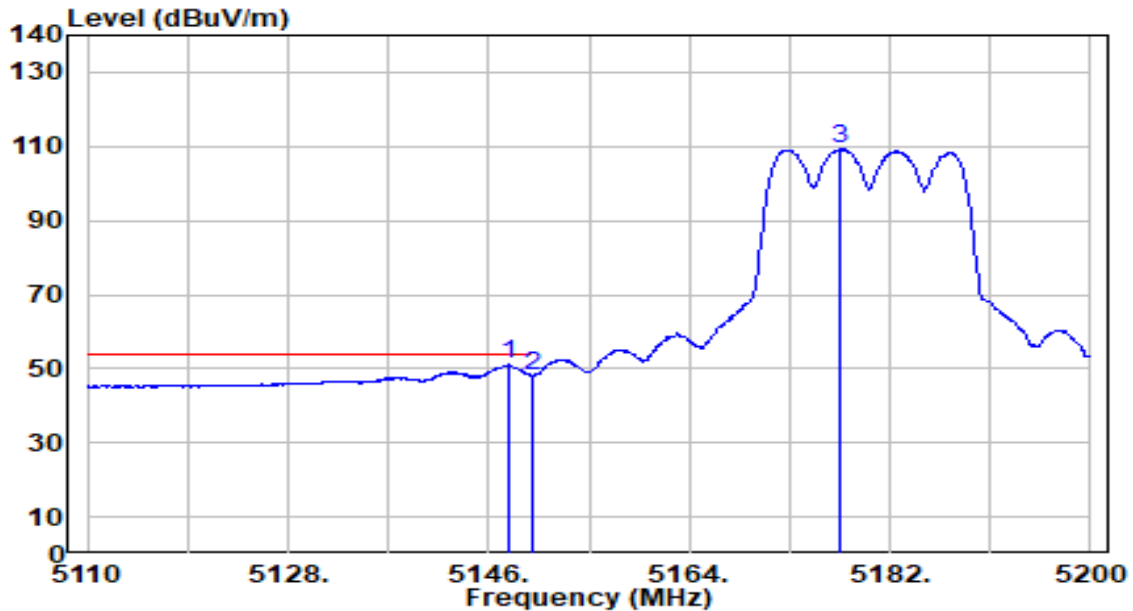


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.710	50.38	0.65	51.04	-2.96	54.00	136	358	Average
2		5150.000	47.50	0.65	48.15	-5.85	54.00	136	358	Average
3		5177.590	108.59	0.68	109.27	N/A	N/A	136	358	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

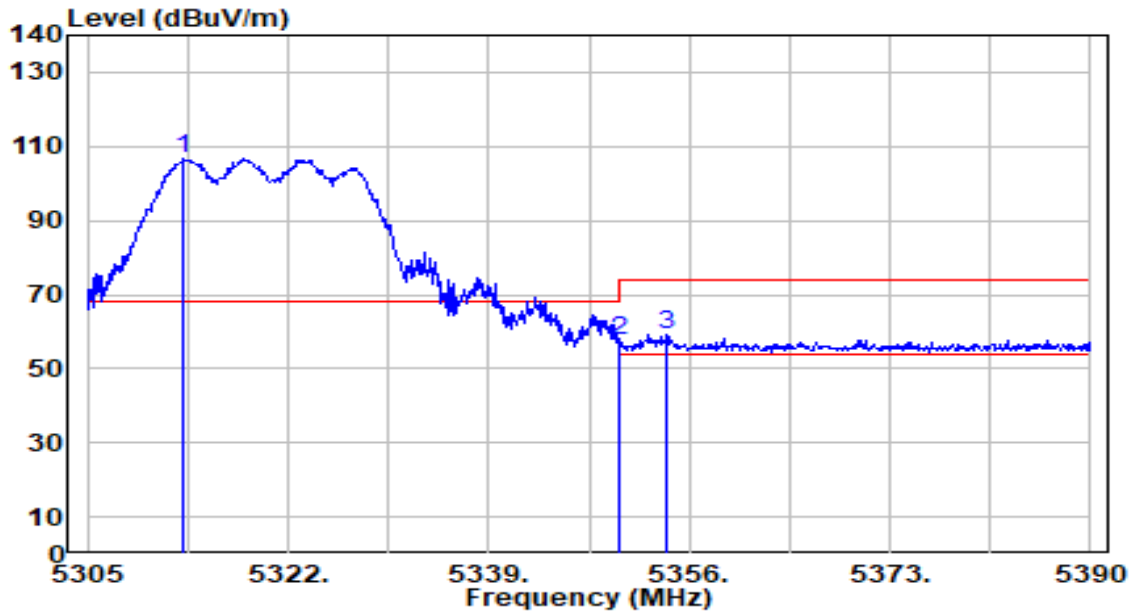


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.075	106.12	0.53	106.65	N/A	N/A	150	11	Peak
2	5350.000	57.31	0.47	57.78	-16.22	74.00	150	11	Peak
3	* 5354.045	58.69	0.46	59.15	-14.85	74.00	150	11	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

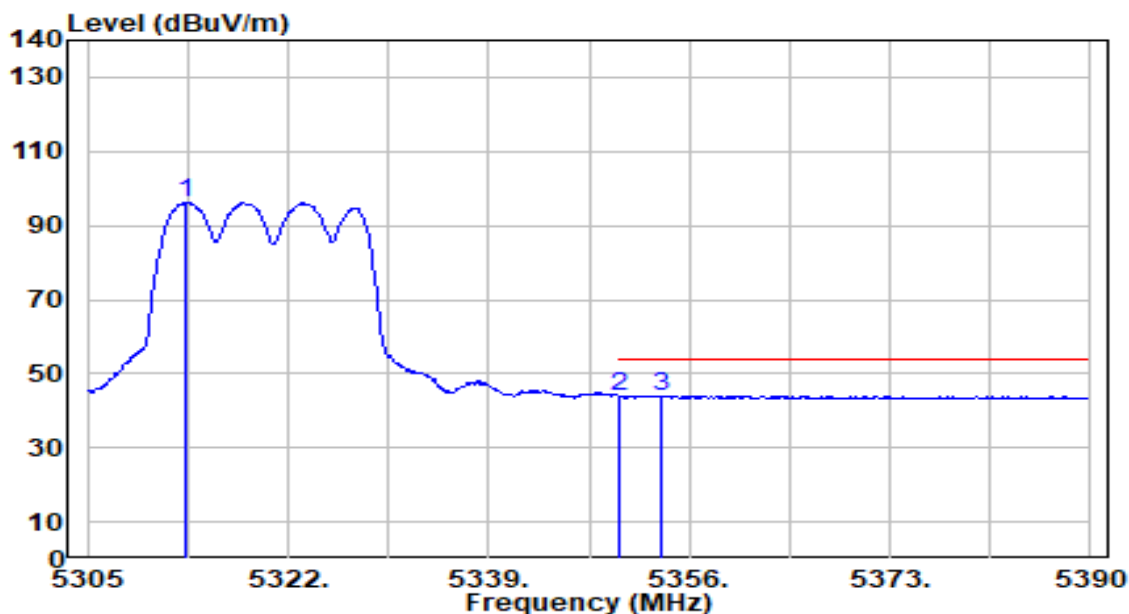


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.415	95.61	0.53	96.14	N/A	N/A	150	11	Average
2	5350.000	43.37	0.47	43.84	-10.16	54.00	150	11	Average
3	* 5353.620	43.62	0.47	44.09	-9.91	54.00	150	11	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

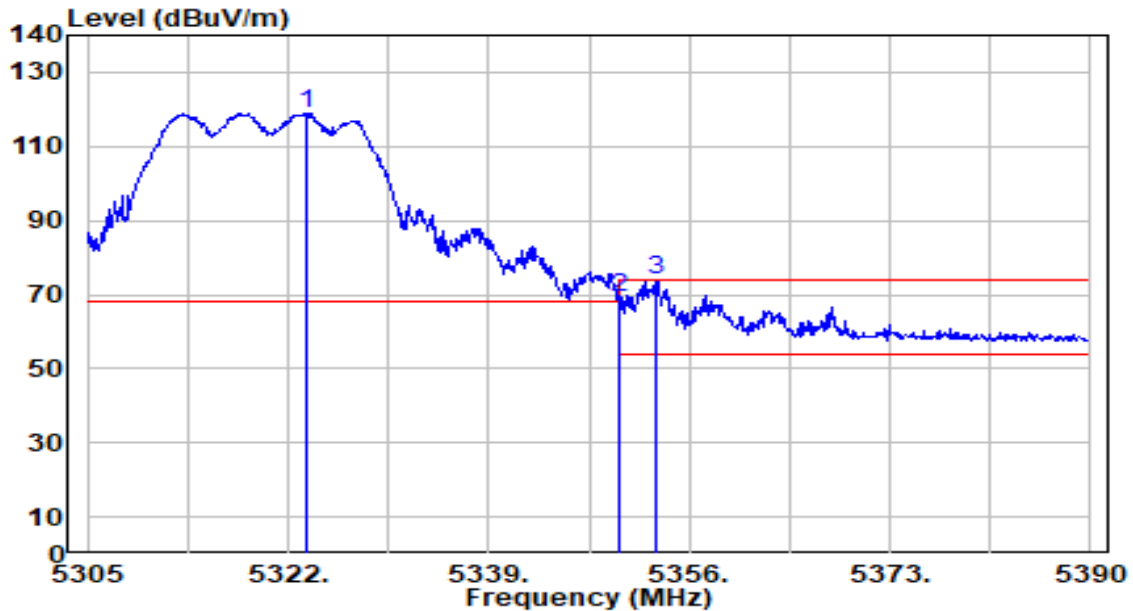


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.615	118.39	0.51	118.90	N/A	N/A	136	352	Peak
2	5350.000	68.67	0.47	69.15	-4.85	74.00	136	352	Peak
3	* 5353.195	73.32	0.47	73.79	-0.21	74.00	136	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

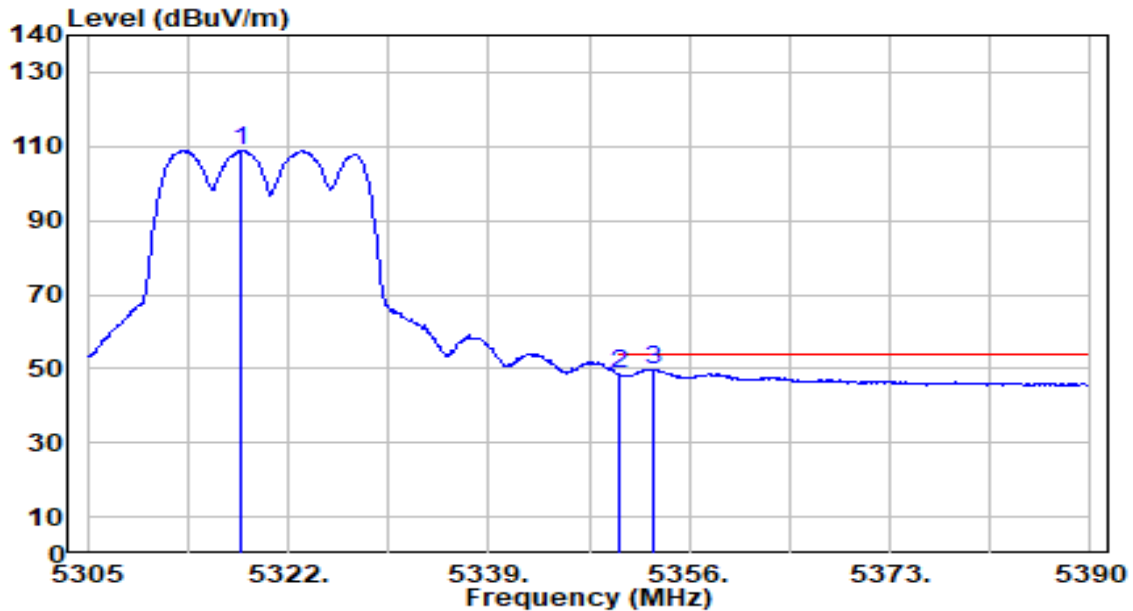


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.005	108.28	0.52	108.80	N/A	N/A	136	352	Average
2	5350.000	48.13	0.47	48.60	-5.40	54.00	136	352	Average
3	* 5353.025	49.34	0.47	49.80	-4.20	54.00	136	352	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

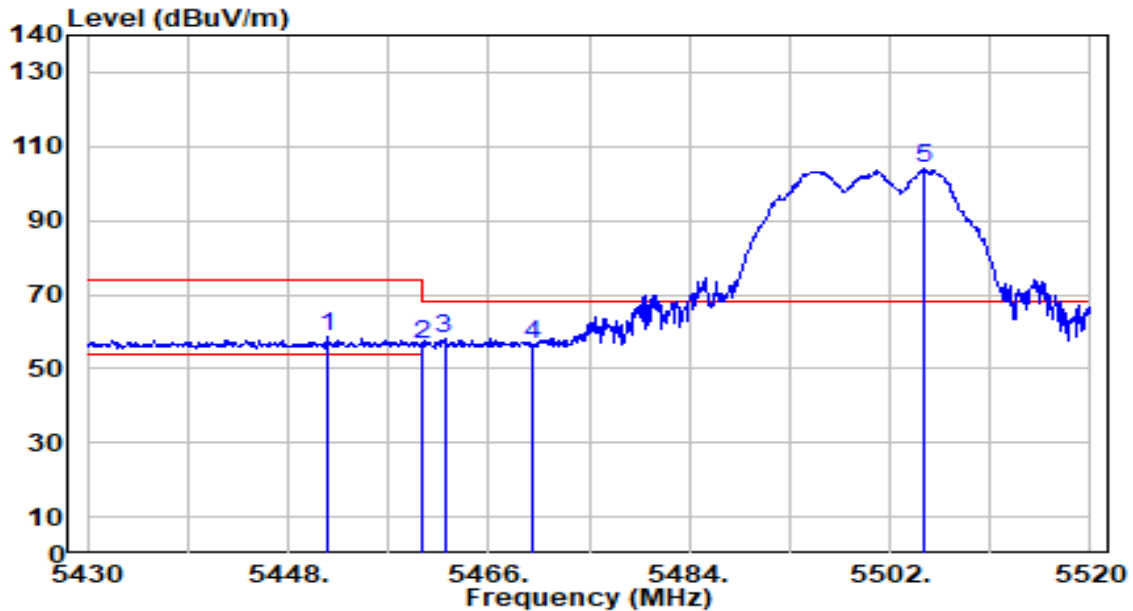


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.600	57.81	0.62	58.43	-15.57	74.00	100	354	Peak
2	5460.000	55.96	0.66	56.62	-17.38	74.00	100	354	Peak
3	* 5462.040	57.22	0.67	57.89	-10.31	68.20	100	354	Peak
4	5470.000	55.72	0.71	56.42	-11.78	68.20	100	354	Peak
5	5505.060	102.98	0.86	103.84	N/A	N/A	100	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

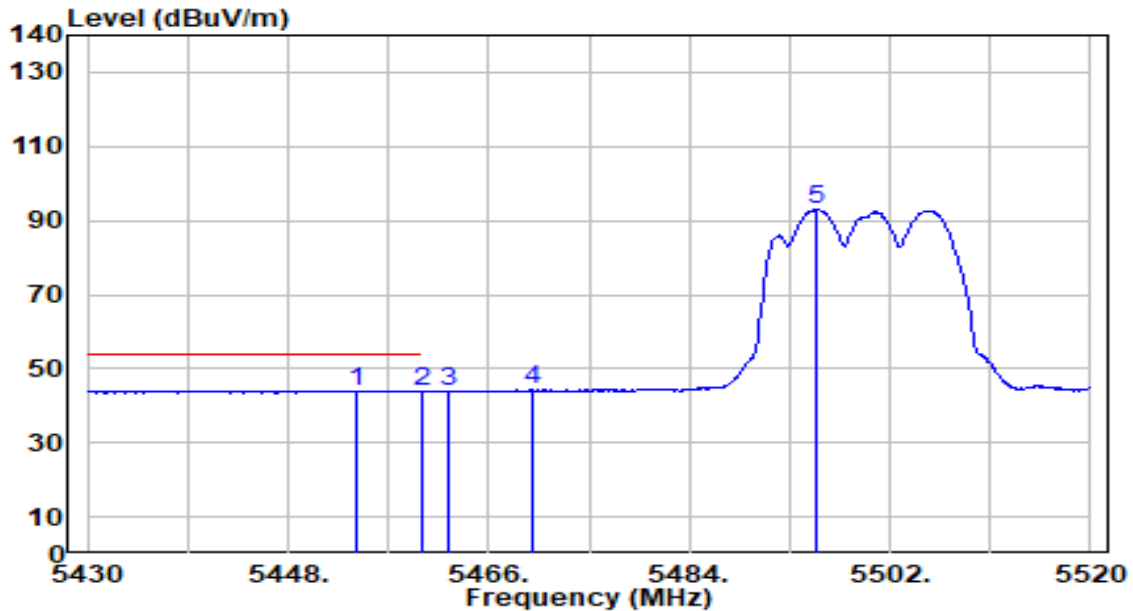


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.210	43.42	0.64	44.06	-9.94	54.00	100	354	Average
2		5460.000	43.15	0.66	43.81	-10.19	54.00	100	354	Average
3		5462.400	43.21	0.67	43.88	N/A	N/A	100	354	Average
4		5470.000	43.47	0.71	44.18	N/A	N/A	100	354	Average
5		5495.340	92.25	0.82	93.07	N/A	N/A	100	354	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

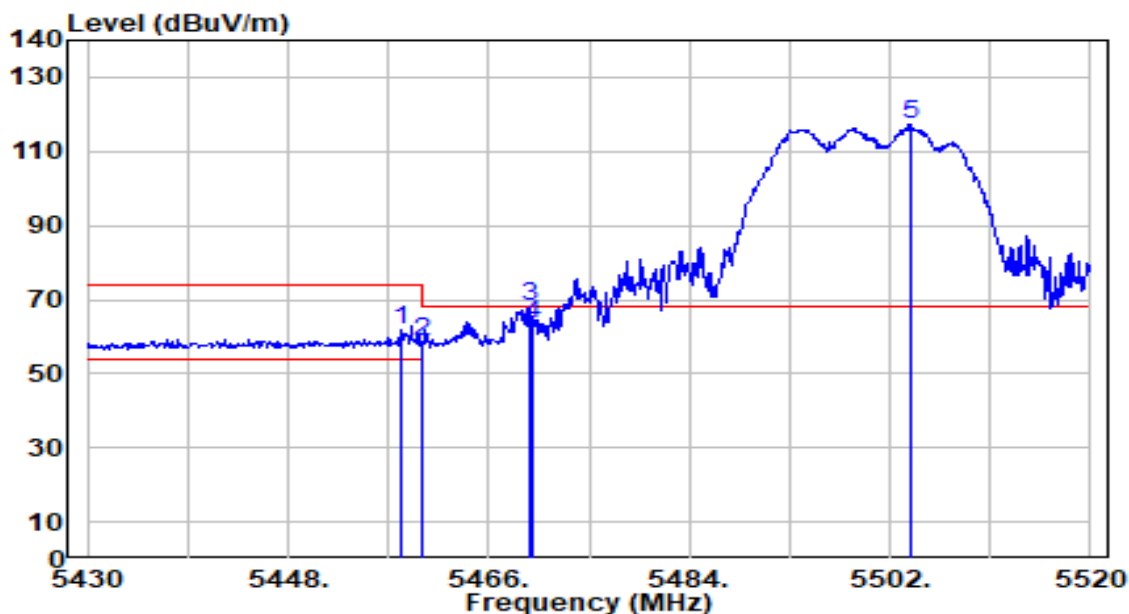


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.260	61.09	0.65	61.74	-12.26	74.00	160	346	Peak
2	5460.000	58.15	0.66	58.81	-15.19	74.00	160	346	Peak
3	* 5469.600	67.38	0.70	68.09	-0.11	68.20	160	346	Peak
4	5470.000	62.70	0.71	63.41	-4.79	68.20	160	346	Peak
5	5503.800	116.25	0.86	117.10	N/A	N/A	160	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

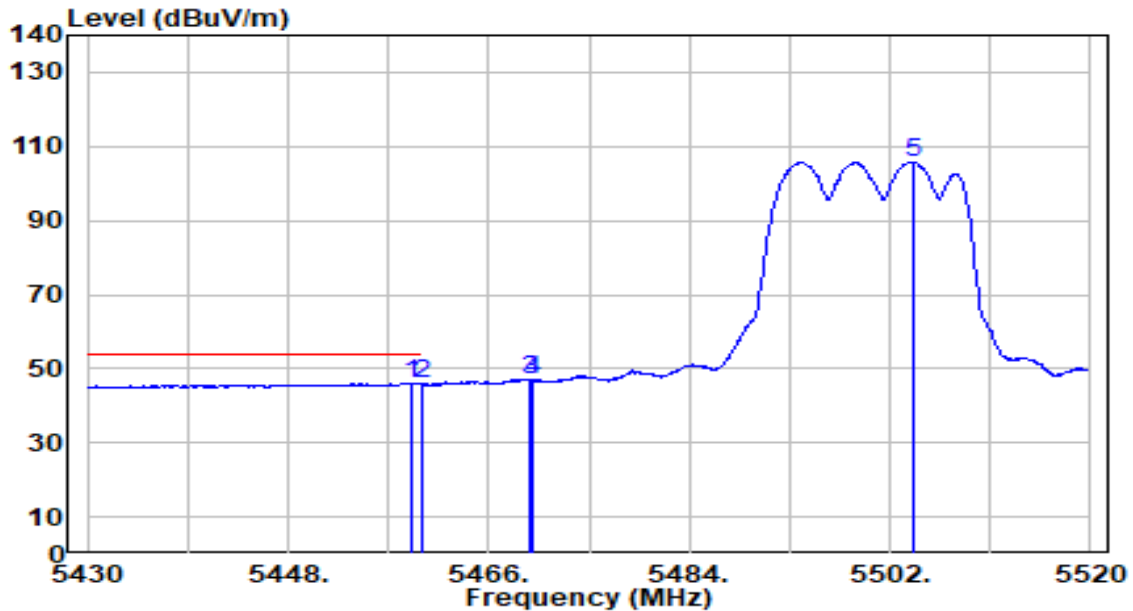


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.980	45.48	0.66	46.14	-7.86	54.00	160	346	Average
2		5460.000	45.06	0.66	45.72	-8.28	54.00	160	346	Average
3		5469.600	46.51	0.70	47.22	N/A	N/A	160	346	Average
4		5470.000	46.47	0.71	47.18	N/A	N/A	160	346	Average
5		5504.070	104.94	0.86	105.80	N/A	N/A	160	346	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

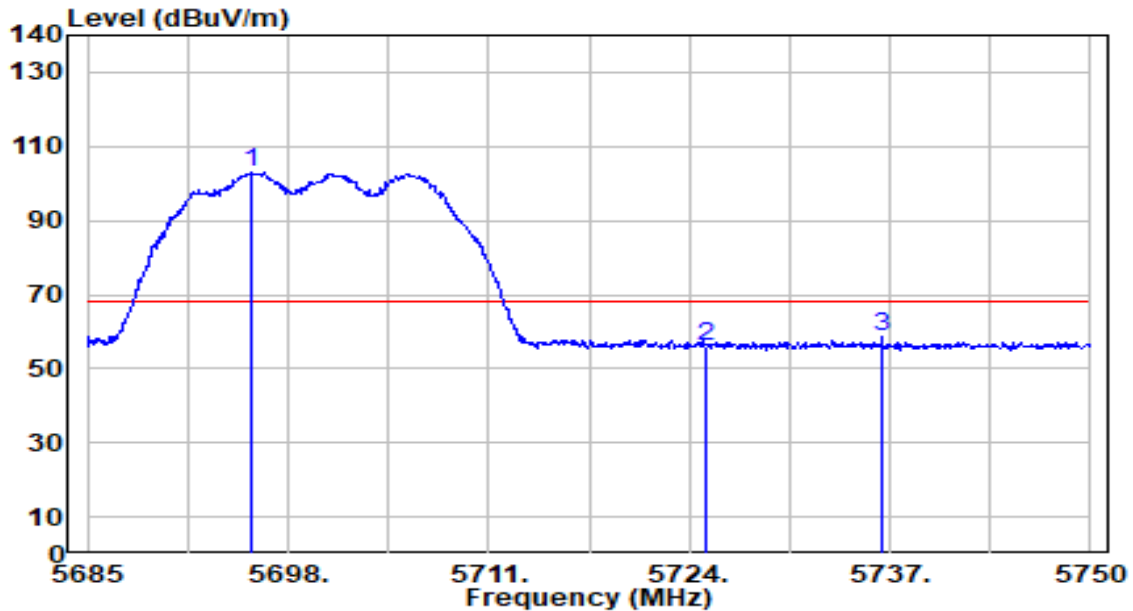


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.595	101.36	1.76	103.11	N/A	N/A	100	349	Peak
2	5725.000	54.09	1.89	55.98	-12.22	68.20	100	349	Peak
3	* 5736.480	56.87	1.95	58.82	-9.38	68.20	100	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

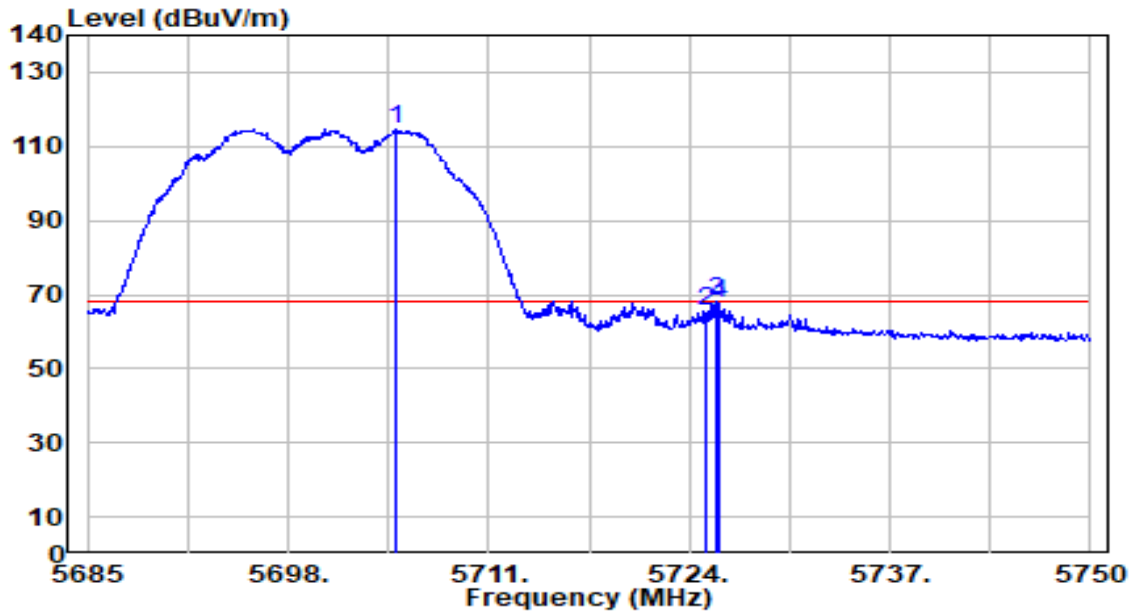


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.020	112.67	1.80	114.47	N/A	N/A	160	9	Peak
2	5725.000	63.51	1.89	65.41	-2.79	68.20	160	9	Peak
3	* 5725.755	66.18	1.90	68.08	-0.12	68.20	160	9	Peak
4	5725.950	65.67	1.90	67.57	-0.63	68.20	160	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

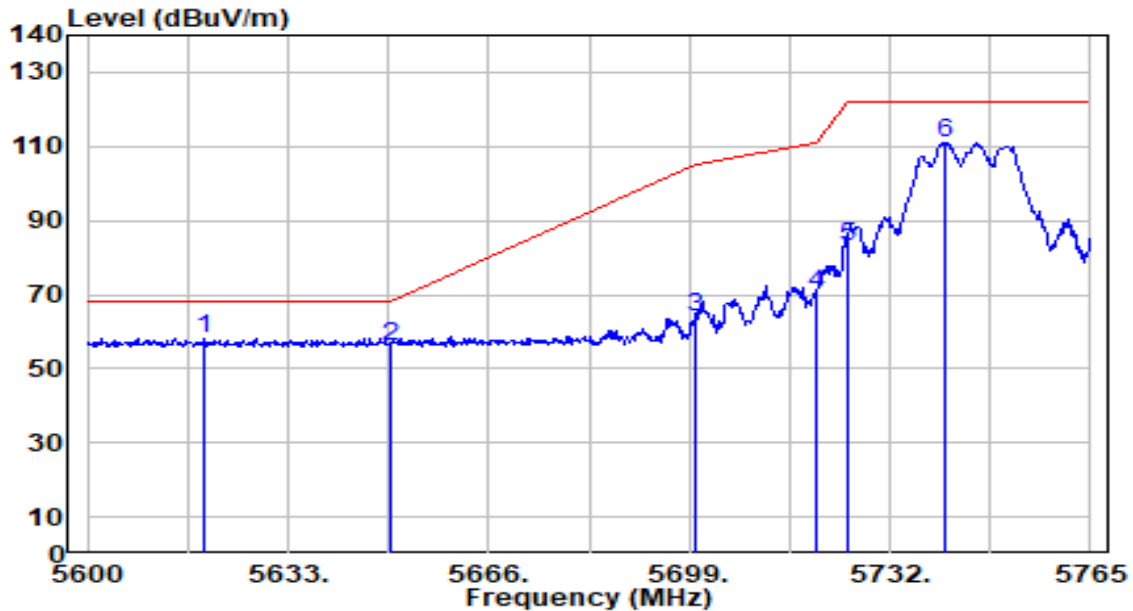


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5619.305	56.83	1.40	58.23	-9.97	68.20	130	348	Peak
2		5650.000	54.64	1.54	56.18	-12.02	68.20	130	348	Peak
3		5700.000	61.92	1.78	63.69	-41.51	105.20	130	348	Peak
4		5720.000	68.17	1.87	70.04	-40.76	110.80	130	348	Peak
5		5725.000	80.81	1.89	82.71	-39.49	122.20	130	348	Peak
6		5740.910	108.97	1.97	110.93	N/A	N/A	130	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

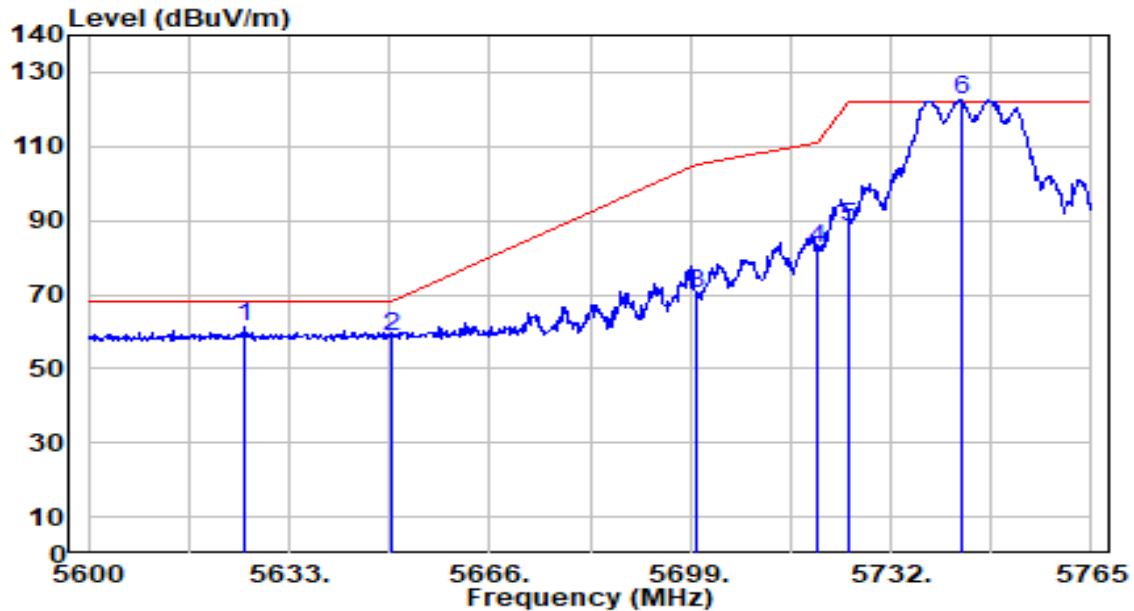


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5625.740	59.61	1.43	61.04	-7.16	68.20	200	351	Peak
2		5650.000	57.06	1.54	58.60	-9.60	68.20	200	351	Peak
3		5700.000	68.25	1.78	70.03	-35.17	105.20	200	351	Peak
4		5720.000	80.64	1.87	82.51	-28.29	110.80	200	351	Peak
5		5725.000	86.45	1.89	88.34	-33.86	122.20	200	351	Peak
6		5743.715	120.76	1.98	122.74	N/A	N/A	200	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

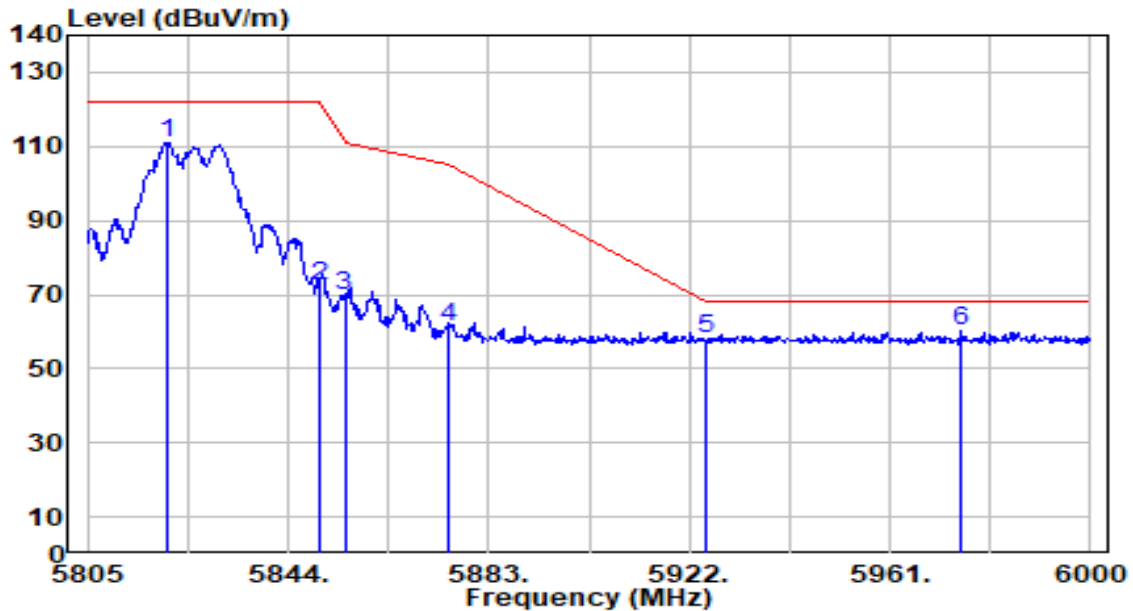


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.405	108.96	2.25	111.20	N/A	N/A	130	351	Peak
2	5850.000	70.25	2.25	72.50	-49.70	122.20	130	351	Peak
3	5855.000	67.23	2.25	69.48	-41.32	110.80	130	351	Peak
4	5875.000	58.90	2.26	61.16	-44.04	105.20	130	351	Peak
5	5925.000	55.76	2.27	58.02	-10.18	68.20	130	351	Peak
6	* 5974.650	57.82	2.28	60.10	-8.10	68.20	130	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

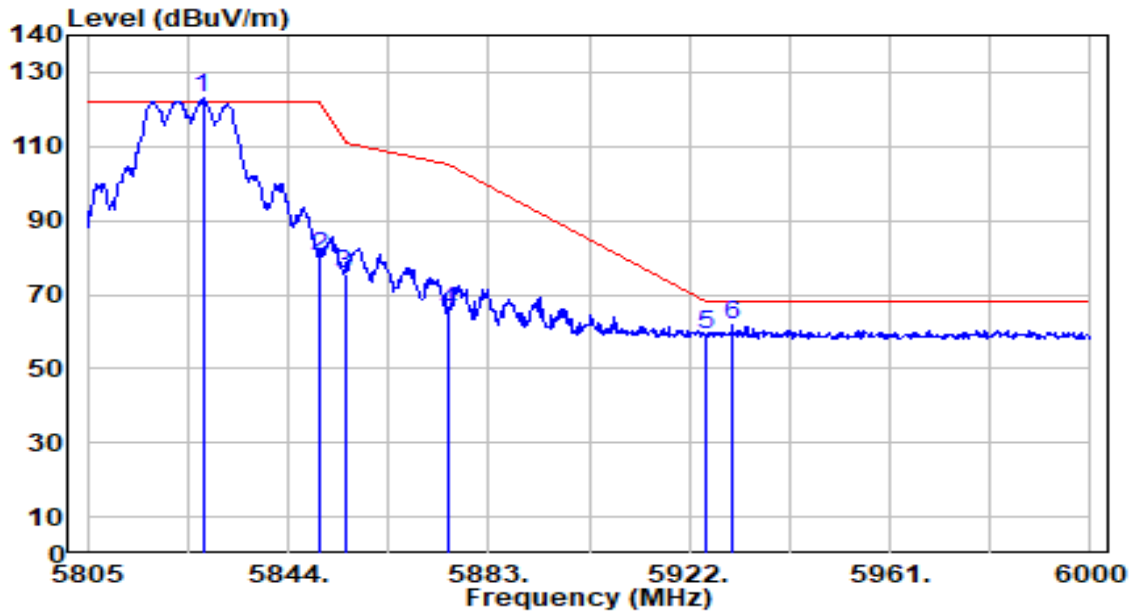


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.425	120.72	2.25	122.97	N/A	N/A	200	355	Peak
2	5850.000	78.09	2.25	80.34	-41.86	122.20	200	355	Peak
3	5855.000	73.26	2.25	75.51	-35.29	110.80	200	355	Peak
4	5875.000	63.47	2.26	65.73	-39.47	105.20	200	355	Peak
5	5925.000	57.12	2.27	59.38	-8.82	68.20	200	355	Peak
6	* 5930.385	59.46	2.27	61.73	-6.47	68.20	200	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

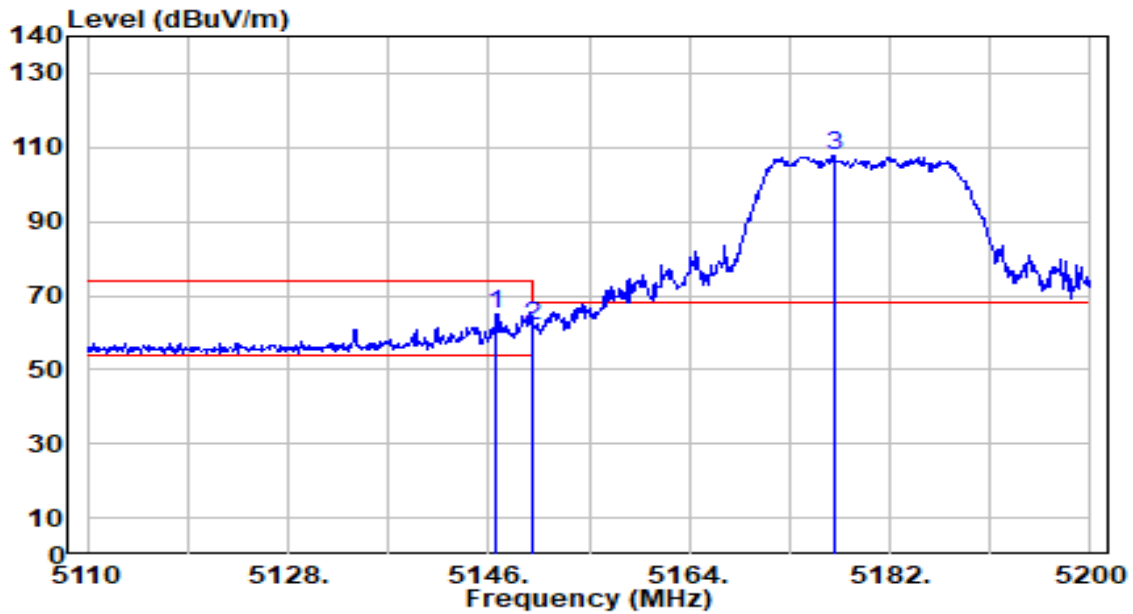


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.720	64.25	0.65	64.90	-9.10	74.00	150	9	Peak
2		5150.000	61.14	0.65	61.80	-12.20	74.00	150	9	Peak
3		5176.960	107.16	0.68	107.84	N/A	N/A	150	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

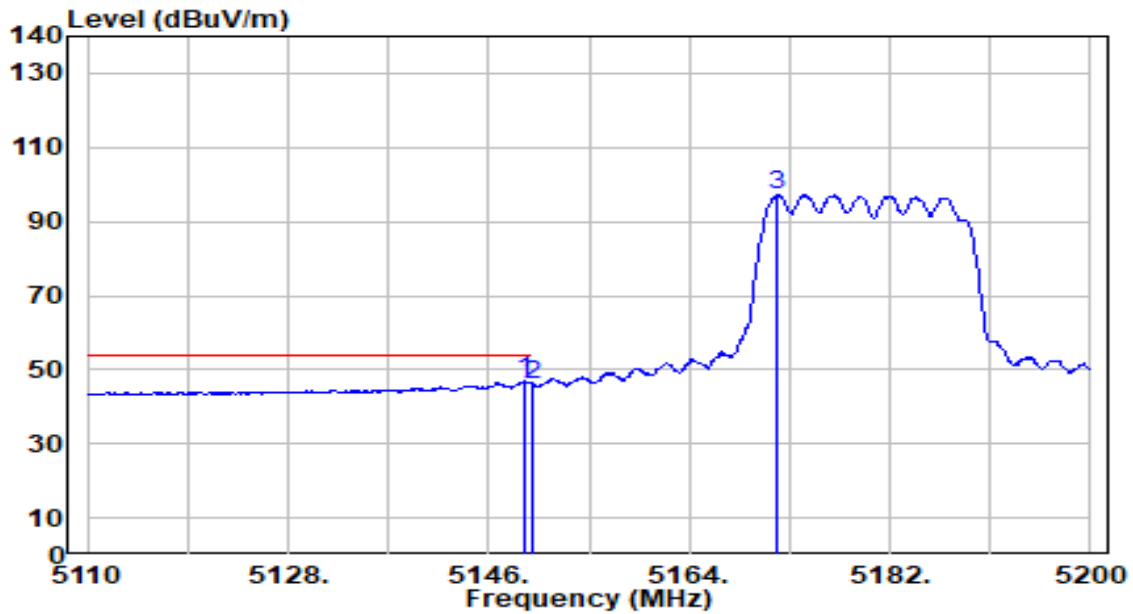


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	46.18	0.65	46.84	-7.16	54.00	150	9	Average
2		5150.000	45.46	0.65	46.11	-7.89	54.00	150	9	Average
3		5171.920	96.53	0.68	97.21	N/A	N/A	150	9	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

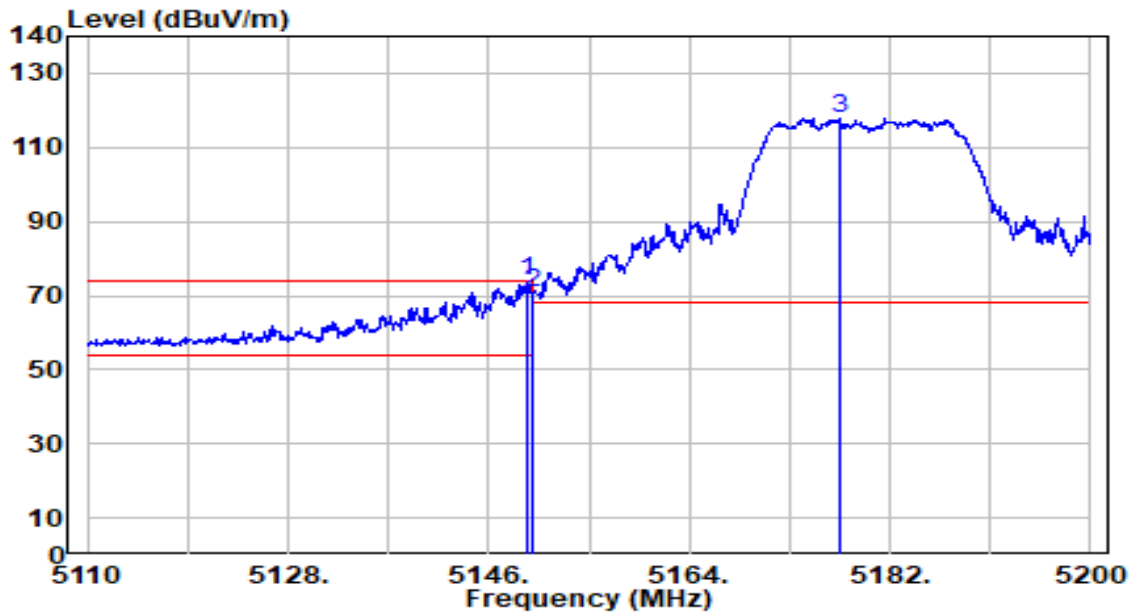


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	73.19	0.65	73.84	-0.16	74.00	136	177	Peak
2		5150.000	70.33	0.65	70.98	-3.02	74.00	136	177	Peak
3		5177.500	117.20	0.68	117.88	N/A	N/A	136	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

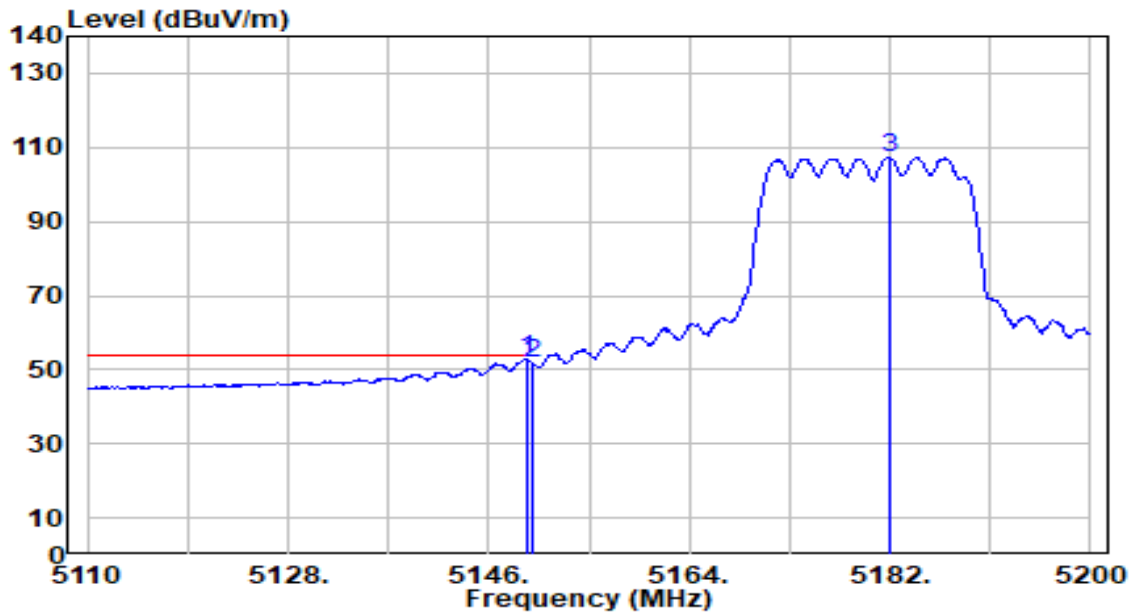


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	52.39	0.65	53.04	-0.96	54.00	136	177	Average
2		5150.000	51.15	0.65	51.81	-2.19	54.00	136	177	Average
3		5181.910	106.71	0.68	107.40	N/A	N/A	136	177	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

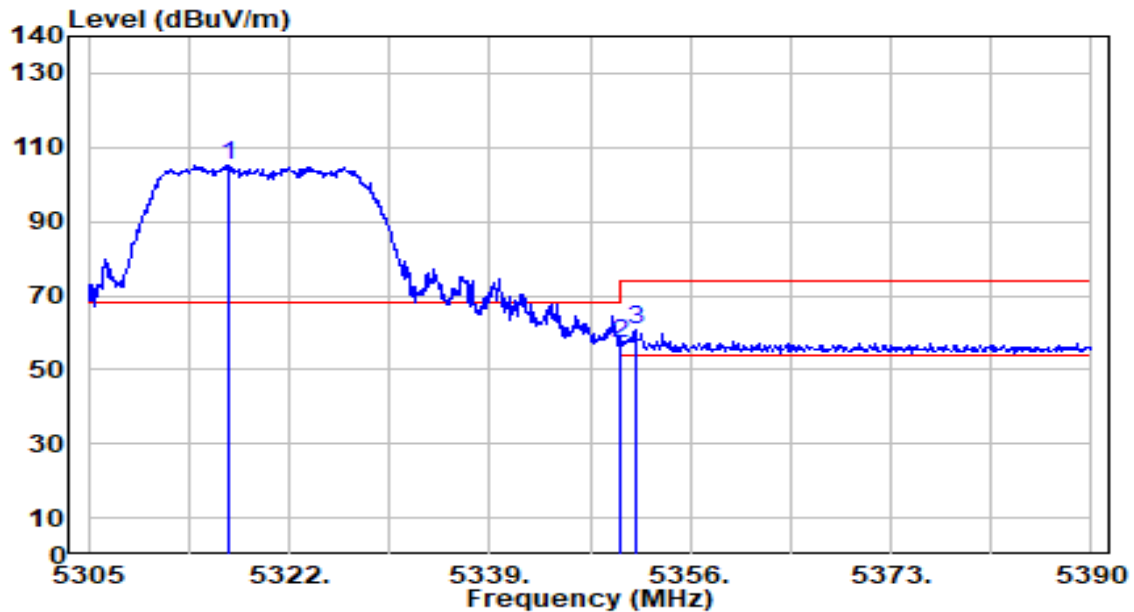


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.815	104.78	0.52	105.31	N/A	N/A	150	11	Peak
2	5350.000	56.83	0.47	57.30	-16.70	74.00	150	11	Peak
3	* 5351.325	60.28	0.47	60.75	-13.25	74.00	150	11	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

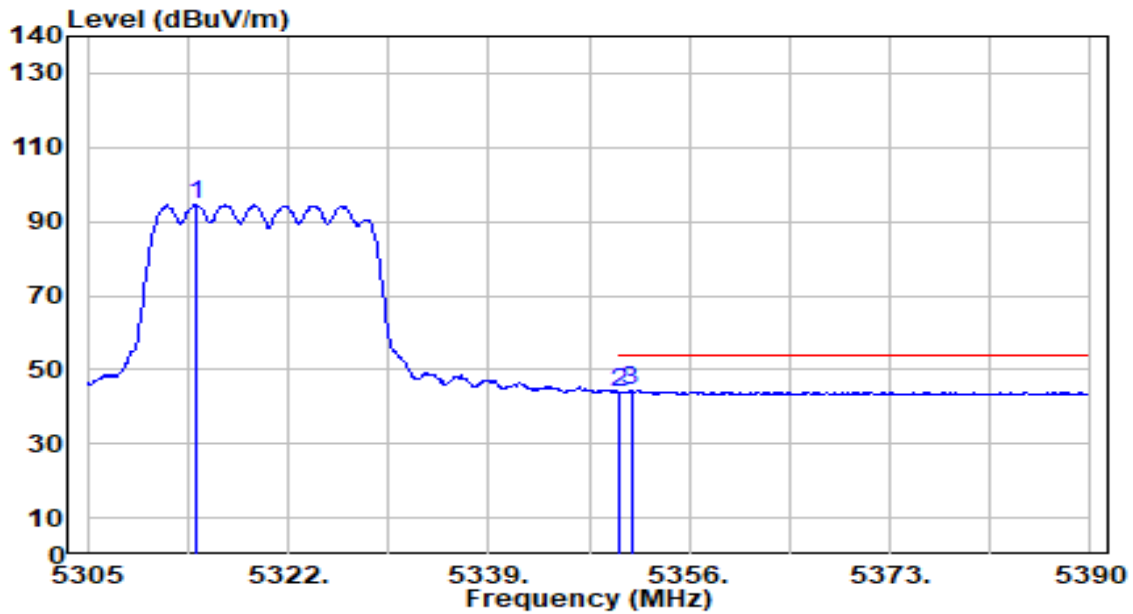


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.265	94.07	0.53	94.60	N/A	N/A	150	11	Average
2	5350.000	43.53	0.47	44.00	-10.00	54.00	150	11	Average
3	* 5351.070	44.02	0.47	44.49	-9.51	54.00	150	11	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

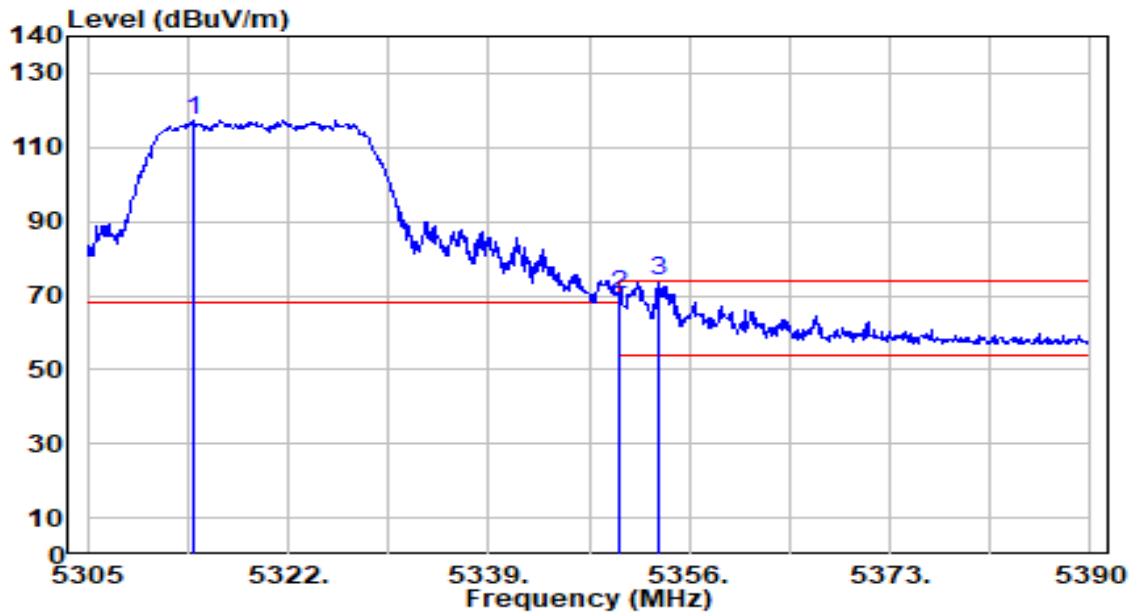


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.010	116.79	0.53	117.31	N/A	N/A	136	353	Peak
2	5350.000	69.71	0.47	70.18	-3.82	74.00	136	353	Peak
3	* 5353.450	73.33	0.47	73.79	-0.21	74.00	136	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

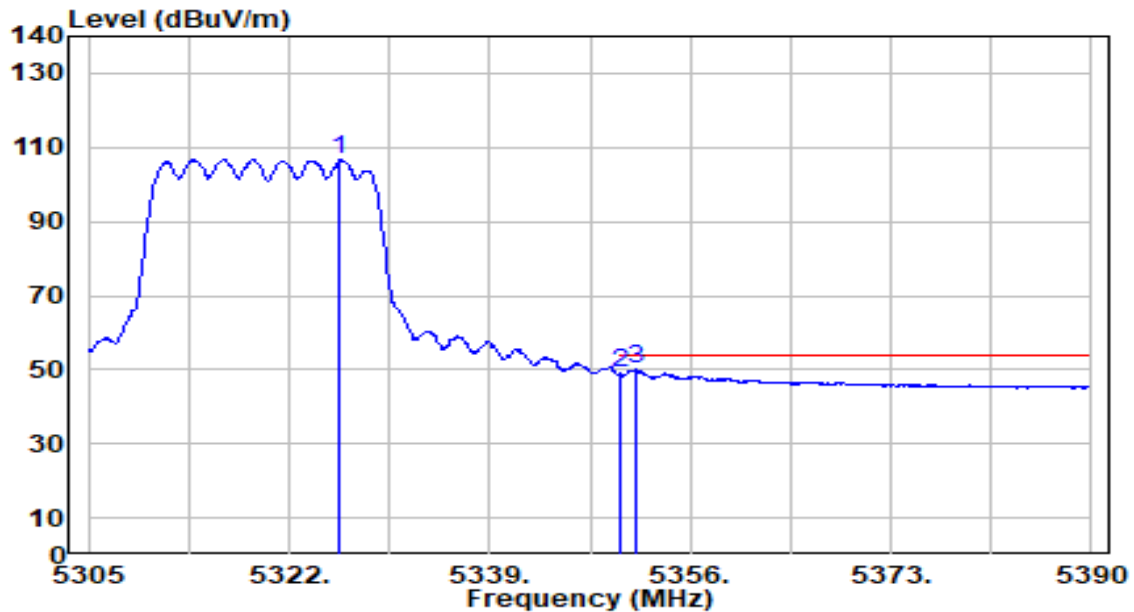


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.335	106.24	0.51	106.74	N/A	N/A	136	353	Average
2	5350.000	48.59	0.47	49.06	-4.94	54.00	136	353	Average
3	* 5351.325	49.55	0.47	50.01	-3.99	54.00	136	353	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

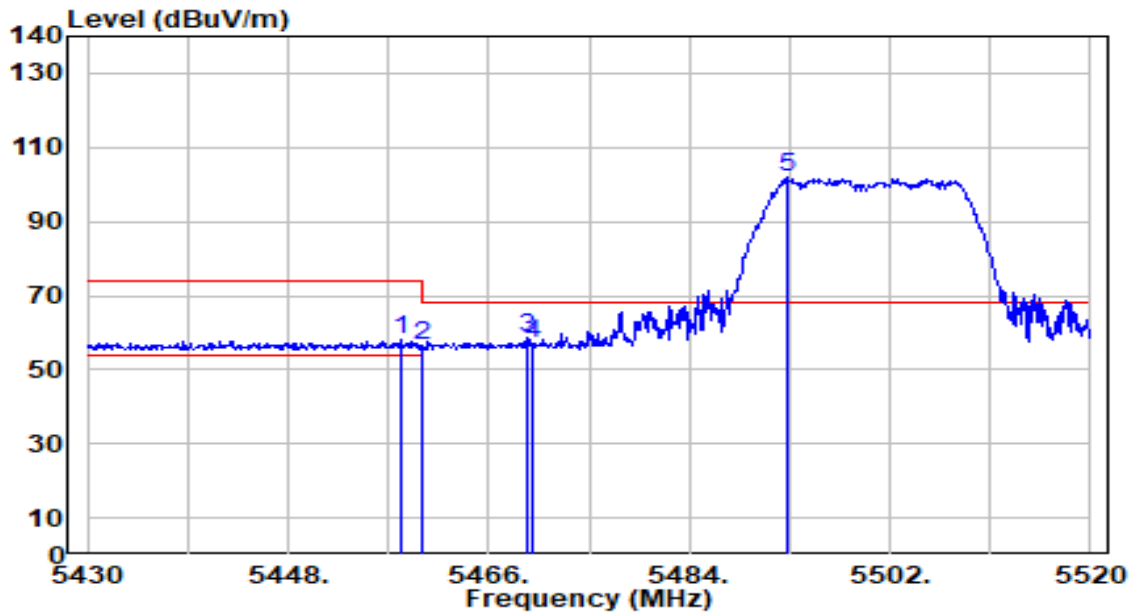


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.080	57.34	0.65	57.99	-16.01	74.00	100	354	Peak
2	5460.000	56.00	0.66	56.66	-17.34	74.00	100	354	Peak
3	* 5469.510	57.83	0.70	58.53	-9.67	68.20	100	354	Peak
4	5470.000	56.50	0.71	57.21	-10.99	68.20	100	354	Peak
5	5492.820	100.92	0.81	101.73	N/A	N/A	100	354	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

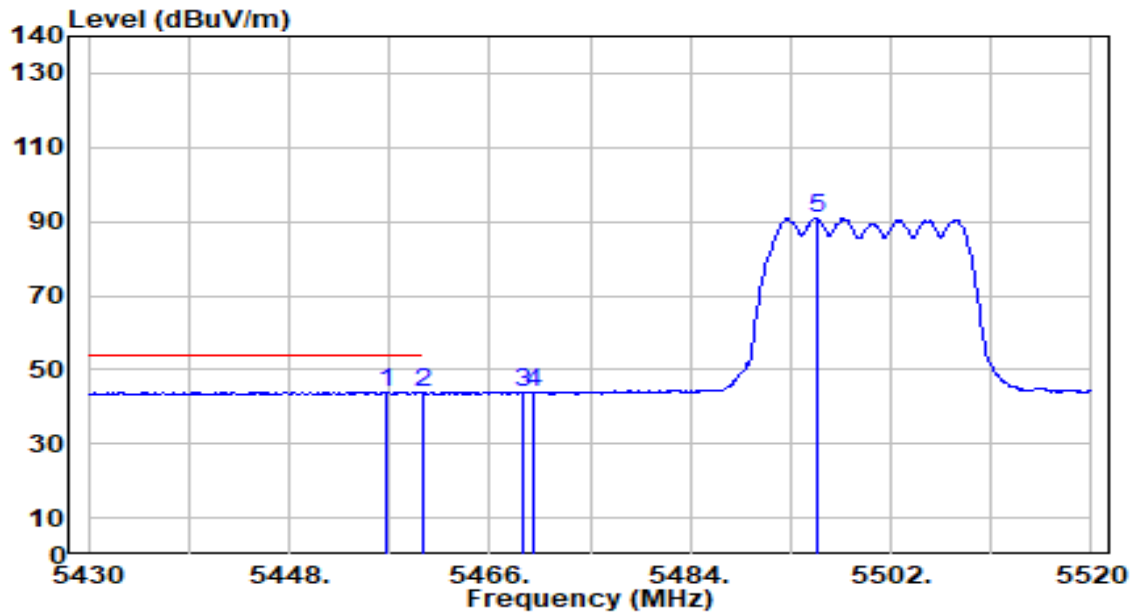


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.640	43.35	0.65	43.99	-10.01	54.00	100	354	Average
2		5460.000	43.00	0.66	43.67	-10.33	54.00	100	354	Average
3		5469.060	43.19	0.70	43.89	N/A	N/A	100	354	Average
4		5470.000	42.98	0.71	43.69	N/A	N/A	100	354	Average
5		5495.340	90.21	0.82	91.03	N/A	N/A	100	354	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

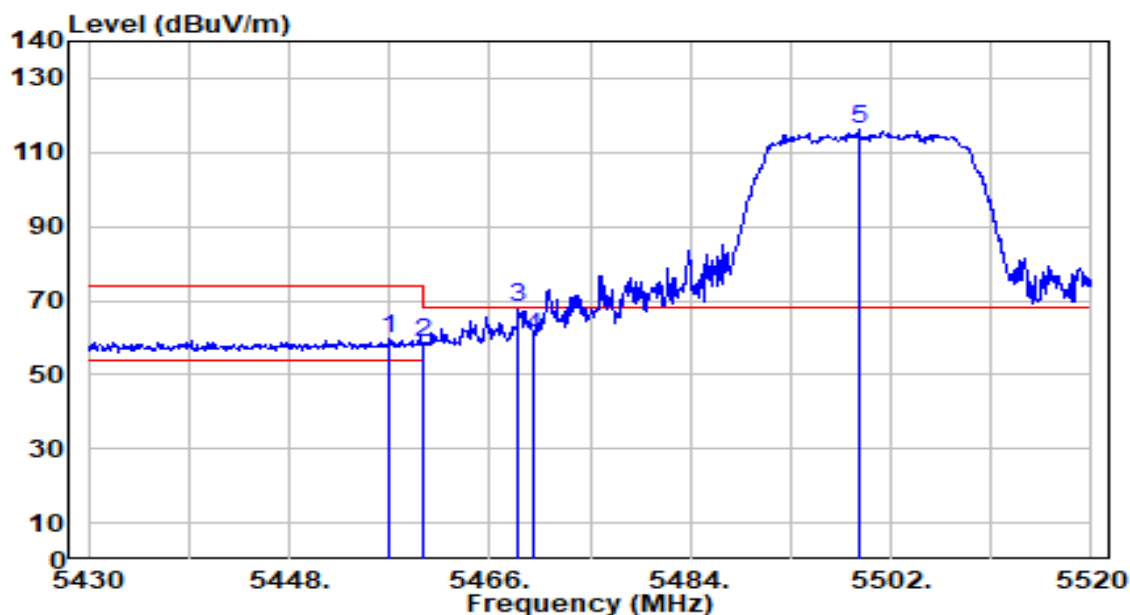


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.000	59.00	0.65	59.65	-14.35	74.00	160	356	Peak
2	5460.000	58.18	0.66	58.84	-15.16	74.00	160	356	Peak
3	* 5468.610	67.30	0.70	68.00	-0.20	68.20	160	356	Peak
4	5470.000	59.68	0.71	60.39	-7.81	68.20	160	356	Peak
5	5499.120	115.25	0.84	116.09	N/A	N/A	160	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

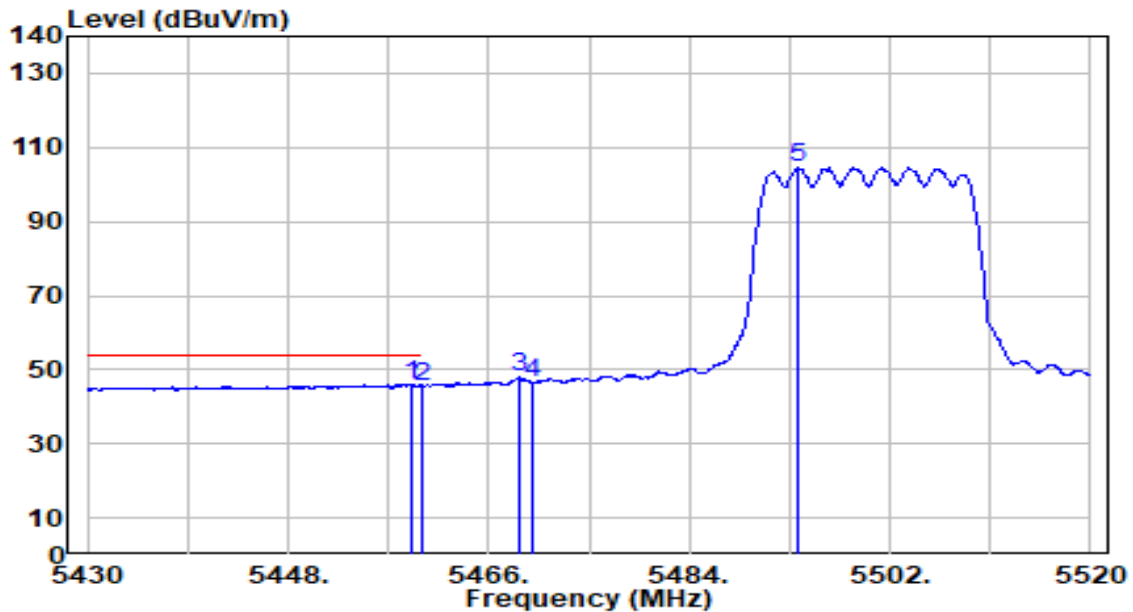


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.980	45.39	0.66	46.05	-7.95	54.00	160	356	Average
2		5460.000	44.93	0.66	45.60	-8.40	54.00	160	356	Average
3		5468.790	47.15	0.70	47.85	N/A	N/A	160	356	Average
4		5470.000	46.04	0.71	46.75	N/A	N/A	160	356	Average
5		5493.720	103.71	0.81	104.53	N/A	N/A	160	356	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

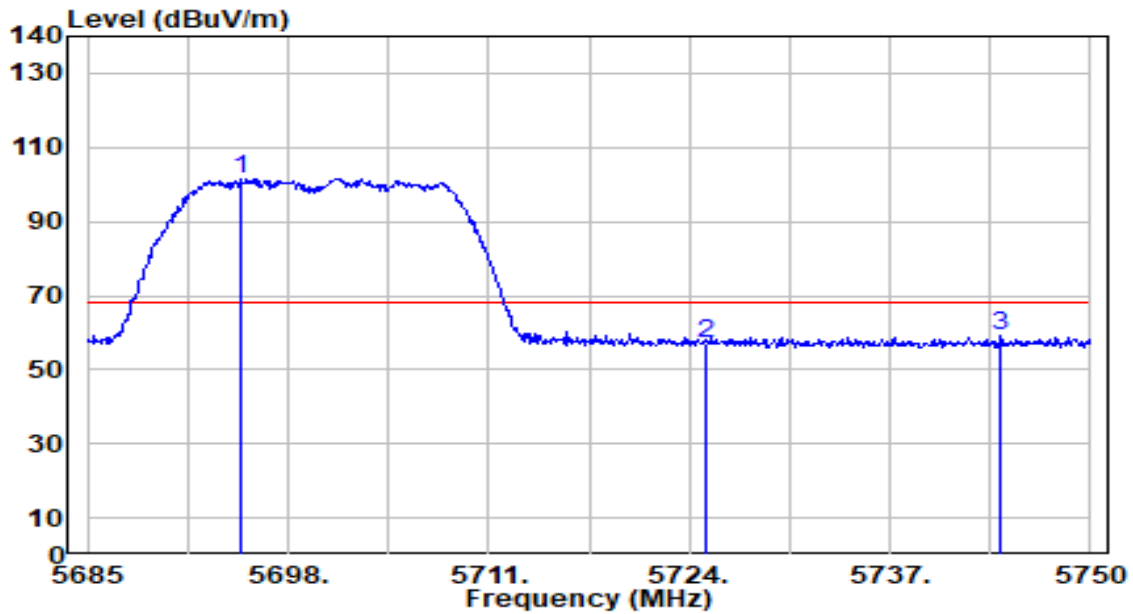


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.010	99.88	1.75	101.63	N/A	N/A	100	349	Peak
2	5725.000	55.07	1.89	56.96	-11.24	68.20	100	349	Peak
3	* 5744.215	57.07	1.98	59.05	-9.15	68.20	100	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

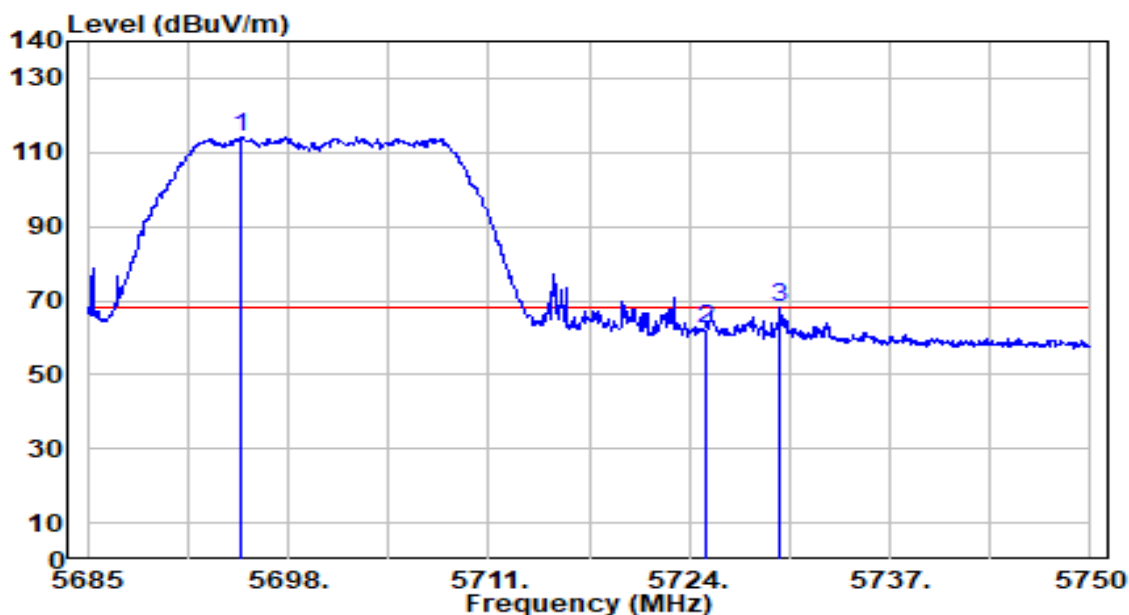


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.010	112.45	1.75	114.20	N/A	N/A	160	9	Peak
2	5725.000	60.52	1.89	62.41	-5.79	68.20	160	9	Peak
3	* 5729.915	66.11	1.92	68.03	-0.17	68.20	160	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

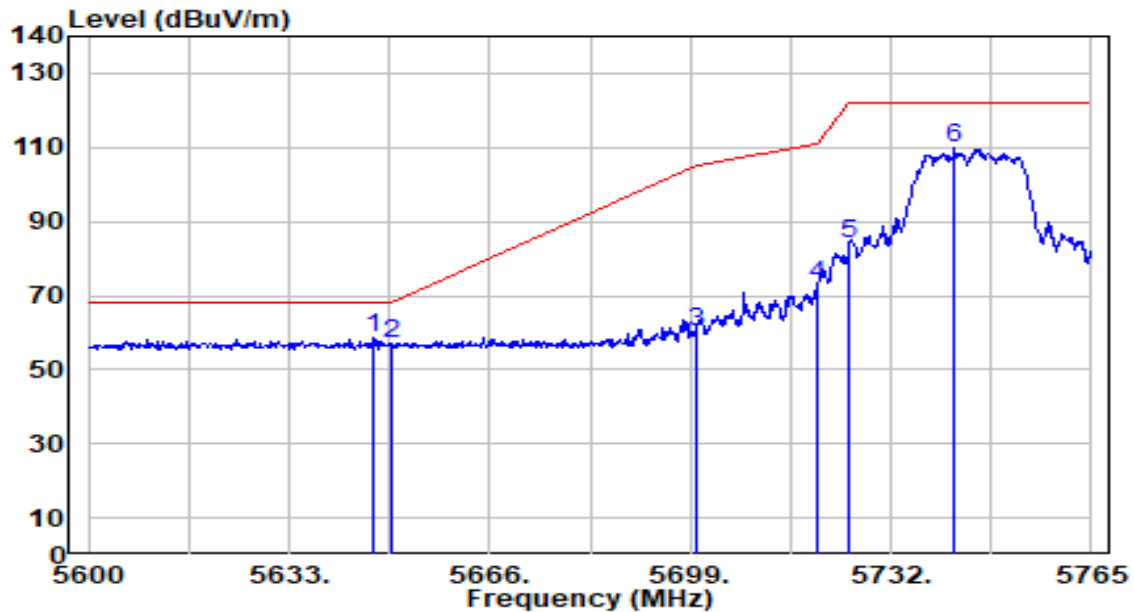


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.860	57.03	1.53	58.56	-9.64	68.20	130	348	Peak
2		5650.000	55.35	1.54	56.89	-11.31	68.20	130	348	Peak
3		5700.000	58.25	1.78	60.02	-45.18	105.20	130	348	Peak
4		5720.000	70.79	1.87	72.66	-38.14	110.80	130	348	Peak
5		5725.000	81.95	1.89	83.84	-38.36	122.20	130	348	Peak
6		5742.560	107.81	1.98	109.79	N/A	N/A	130	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

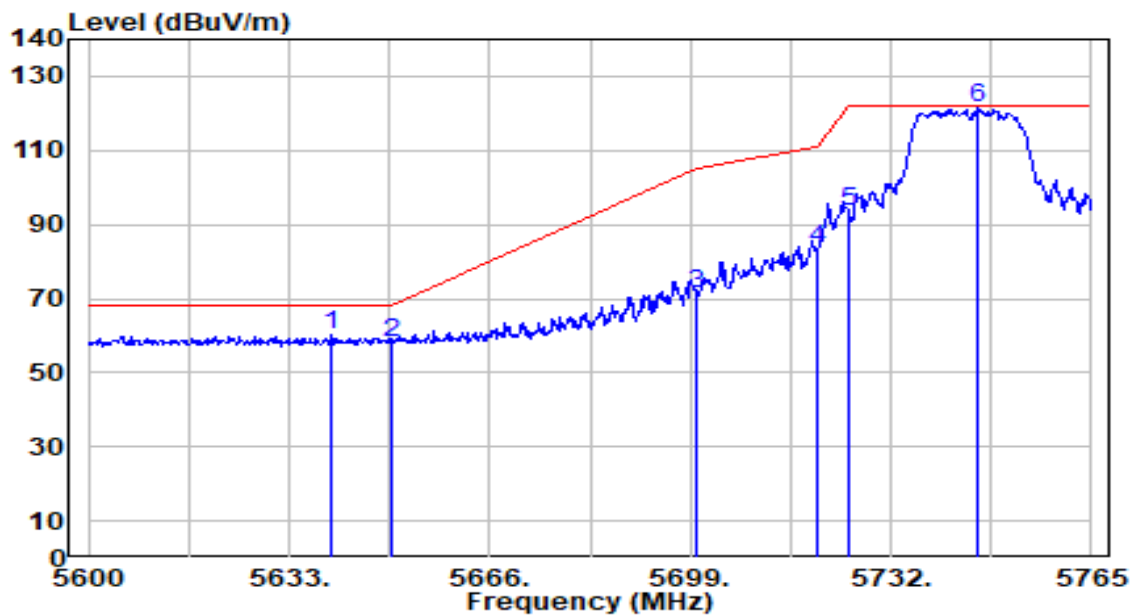


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5639.930	58.58	1.49	60.07	-8.13	68.20	200	351	Peak
2		5650.000	56.70	1.54	58.24	-9.96	68.20	200	351	Peak
3		5700.000	69.32	1.78	71.09	-34.11	105.20	200	351	Peak
4		5720.000	81.45	1.87	83.32	-27.48	110.80	200	351	Peak
5		5725.000	91.44	1.89	93.34	-28.86	122.20	200	351	Peak
6		5746.190	119.75	1.99	121.75	N/A	N/A	200	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

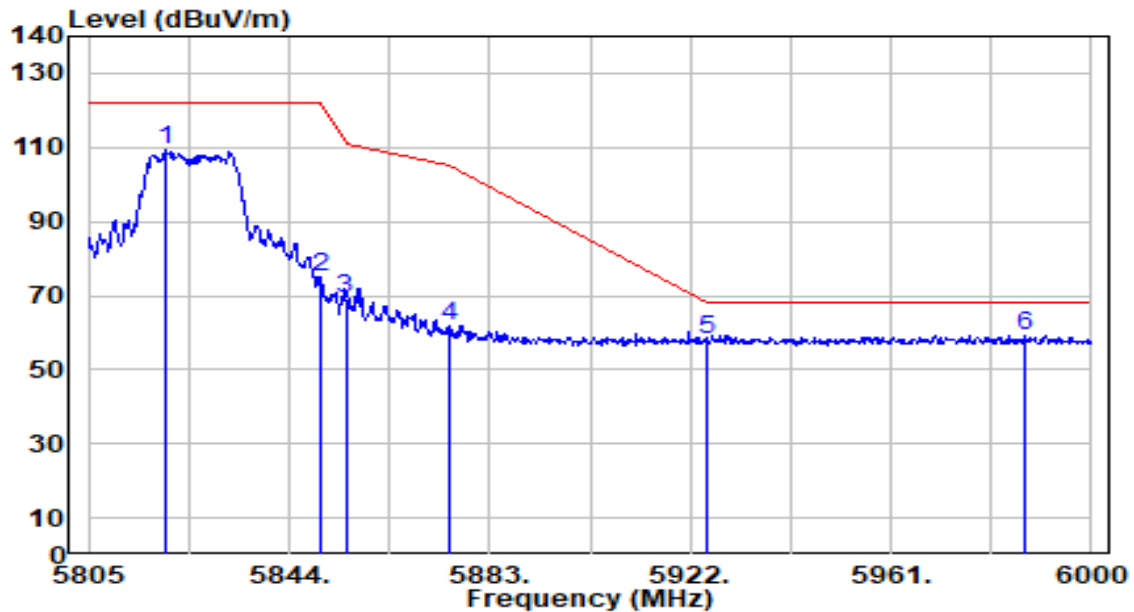


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.210	107.09	2.25	109.34	N/A	N/A	130	351	Peak
2	5850.000	72.66	2.25	74.92	-47.28	122.20	130	351	Peak
3	5855.000	66.83	2.25	69.08	-41.72	110.80	130	351	Peak
4	5875.000	59.66	2.26	61.92	-43.28	105.20	130	351	Peak
5	5925.000	55.85	2.27	58.11	-10.09	68.20	130	351	Peak
6	* 5987.130	57.10	2.28	59.38	-8.82	68.20	130	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

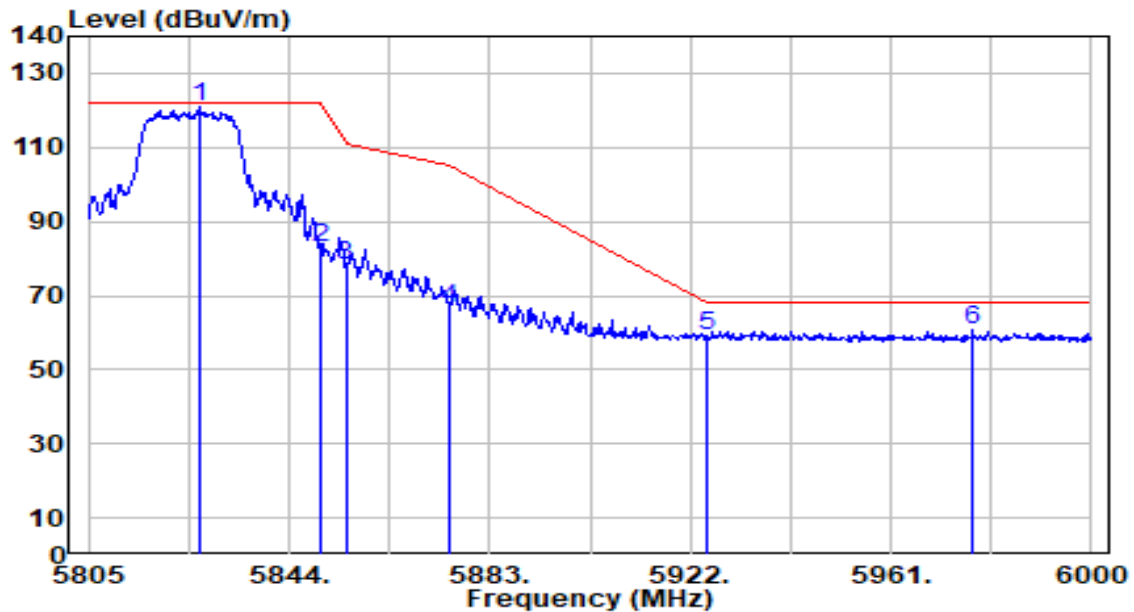


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	118.49	2.25	120.74	N/A	N/A	200	355	Peak
2	5850.000	80.45	2.25	82.70	-39.50	122.20	200	355	Peak
3	5855.000	76.01	2.25	78.27	-32.53	110.80	200	355	Peak
4	5875.000	64.19	2.26	66.45	-38.75	105.20	200	355	Peak
5	5925.000	56.78	2.27	59.05	-9.15	68.20	200	355	Peak
6	* 5976.795	58.26	2.28	60.53	-7.67	68.20	200	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

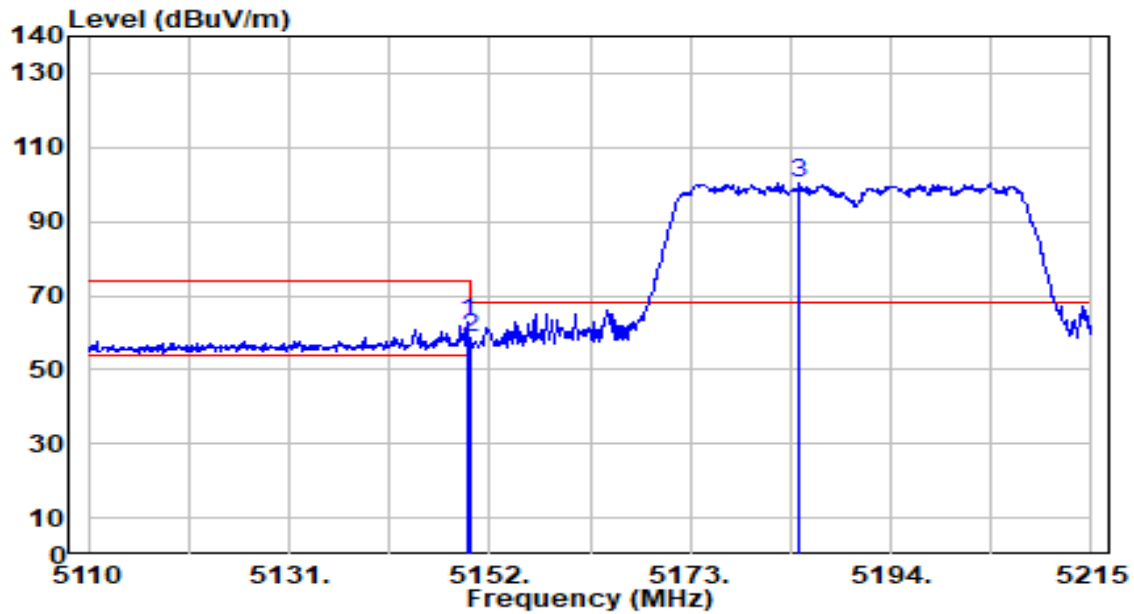


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.585	62.35	0.65	63.00	-11.00	74.00	150	10	Peak
2		5150.000	57.80	0.65	58.46	-15.54	74.00	150	10	Peak
3		5184.445	99.75	0.69	100.44	N/A	N/A	150	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

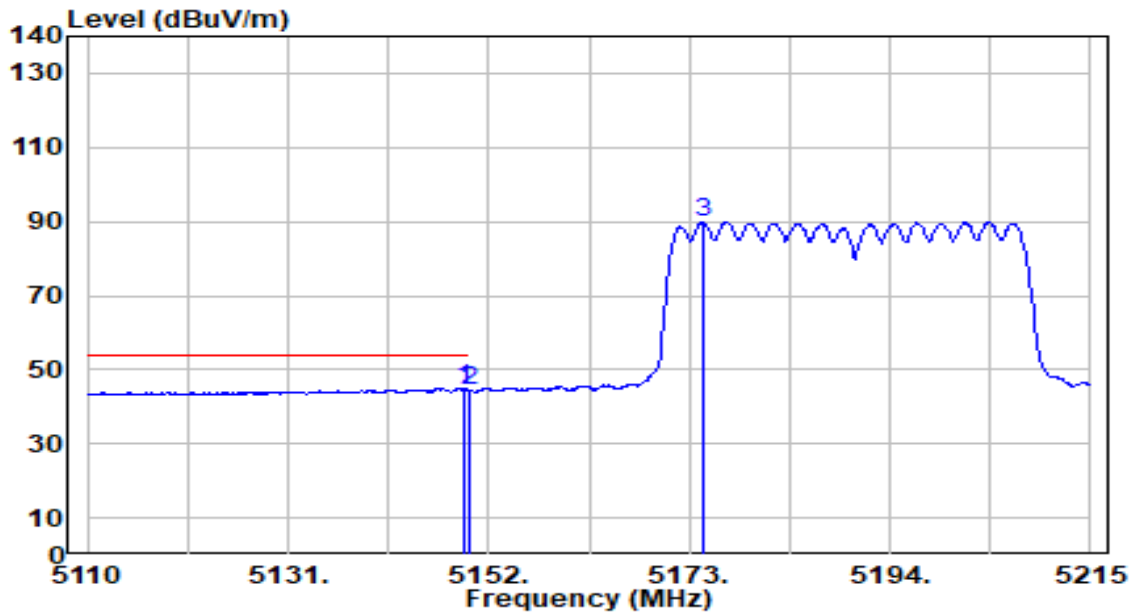


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	44.27	0.65	44.93	-9.07	54.00	150	10	Average
2		5150.000	43.71	0.65	44.36	-9.64	54.00	150	10	Average
3		5174.470	89.15	0.68	89.83	N/A	N/A	150	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

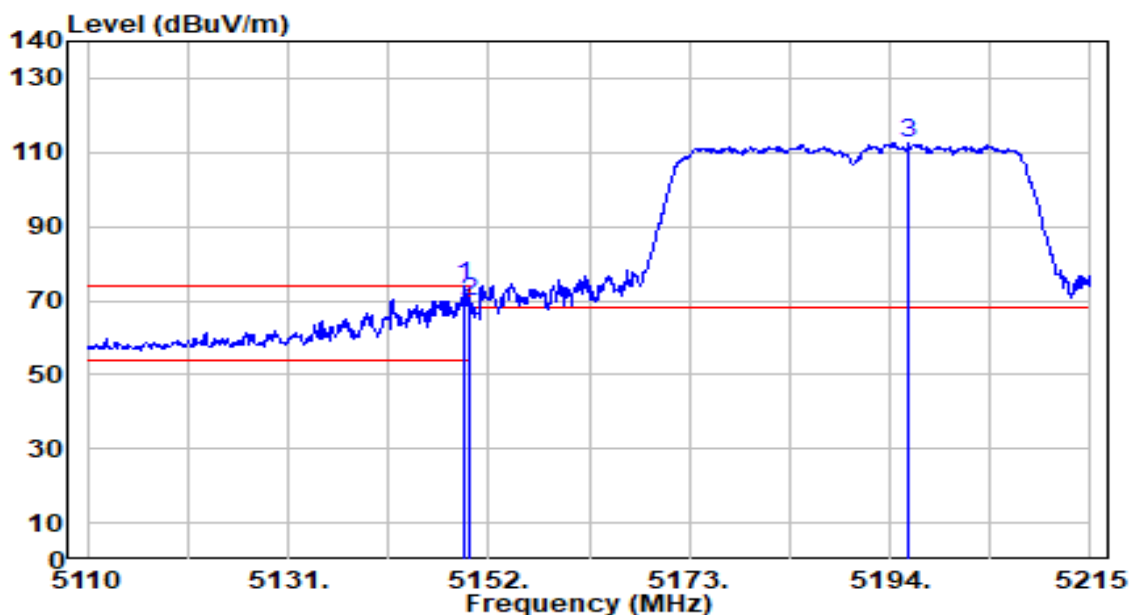


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	73.20	0.65	73.86	-0.14	74.00	136	177	Peak
2		5150.000	69.06	0.65	69.71	-4.29	74.00	136	177	Peak
3		5195.890	111.94	0.70	112.64	N/A	N/A	136	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

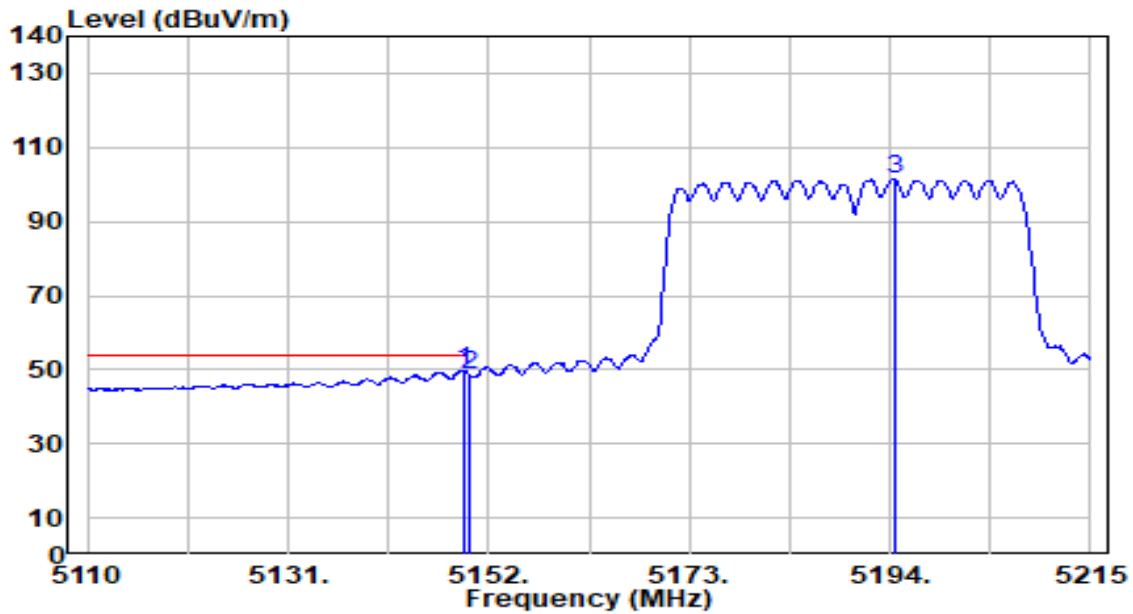


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.375	49.12	0.65	49.77	-4.23	54.00	136	177	Average
2		5150.000	48.10	0.65	48.75	-5.25	54.00	136	177	Average
3		5194.420	100.68	0.70	101.38	N/A	N/A	136	177	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

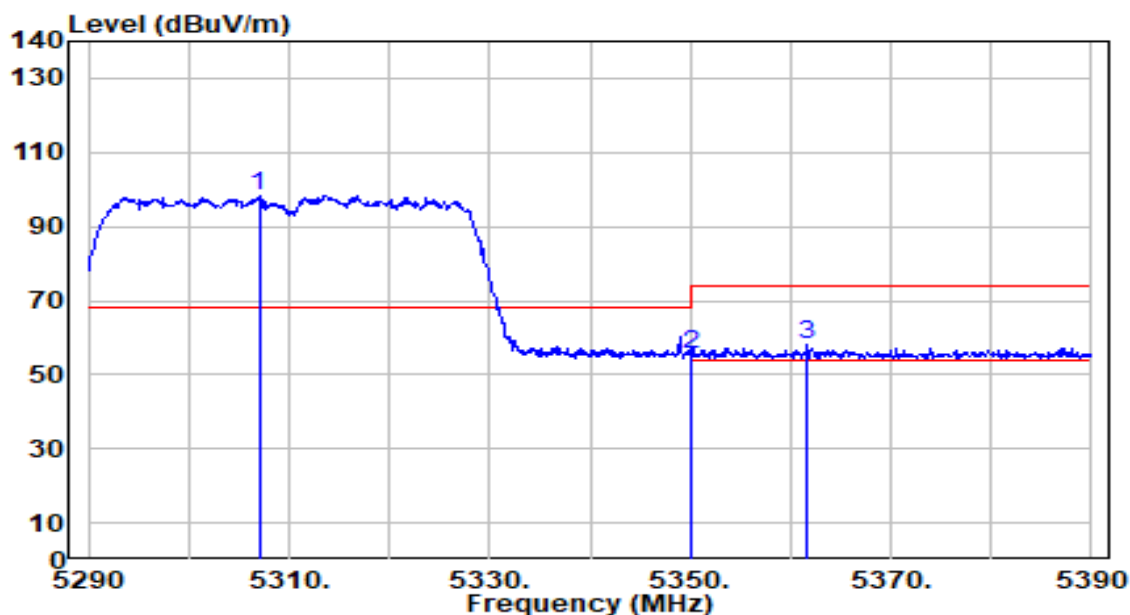


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.000	97.70	0.54	98.23	N/A	N/A	150	11	Peak
2	5350.000	54.76	0.47	55.23	-18.77	74.00	150	11	Peak
3	* 5361.600	57.74	0.45	58.19	-15.81	74.00	150	11	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

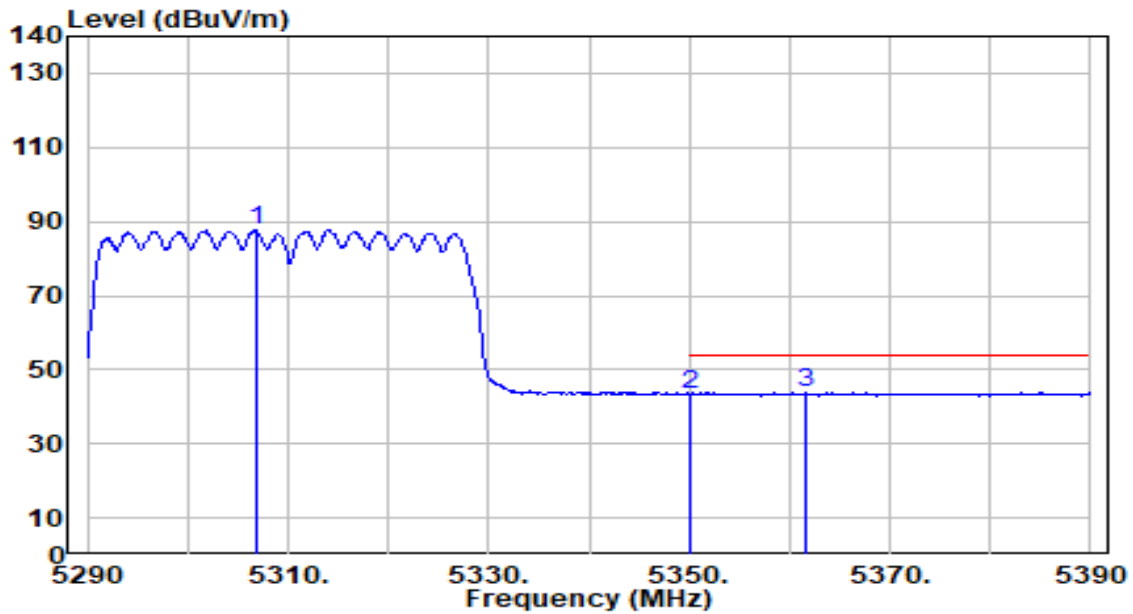


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.800	87.27	0.54	87.80	N/A	N/A	150	11	Average
2	5350.000	43.07	0.47	43.54	-10.46	54.00	150	11	Average
3	* 5361.700	43.32	0.45	43.77	-10.23	54.00	150	11	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

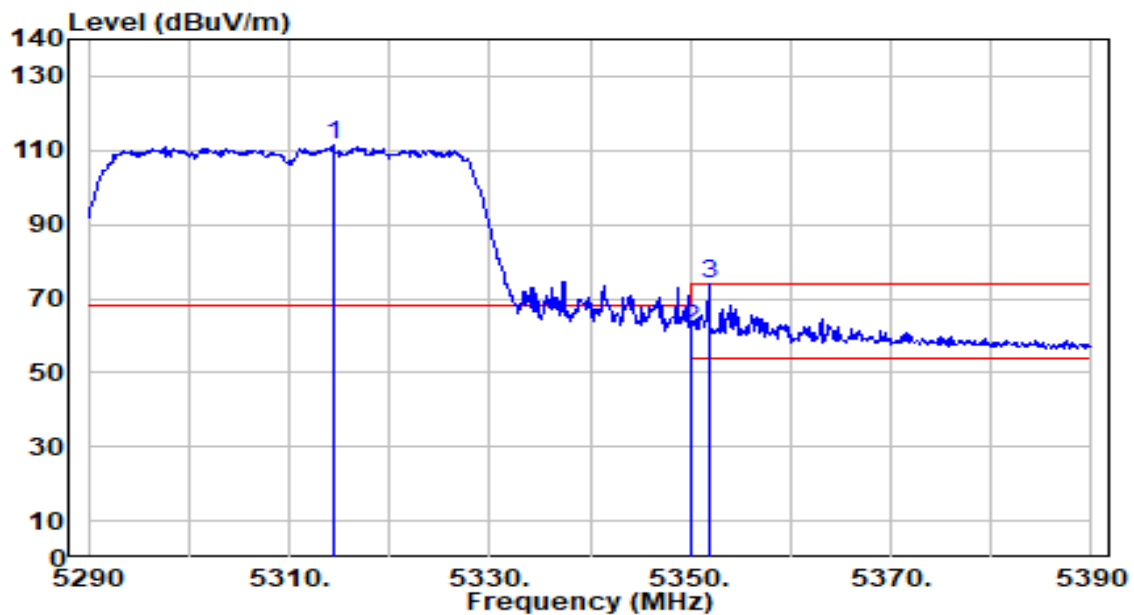


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.400	111.01	0.53	111.54	N/A	N/A	136	352	Peak
2	5350.000	61.40	0.47	61.87	-12.13	74.00	136	352	Peak
3	* 5351.800	73.34	0.47	73.81	-0.19	74.00	136	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

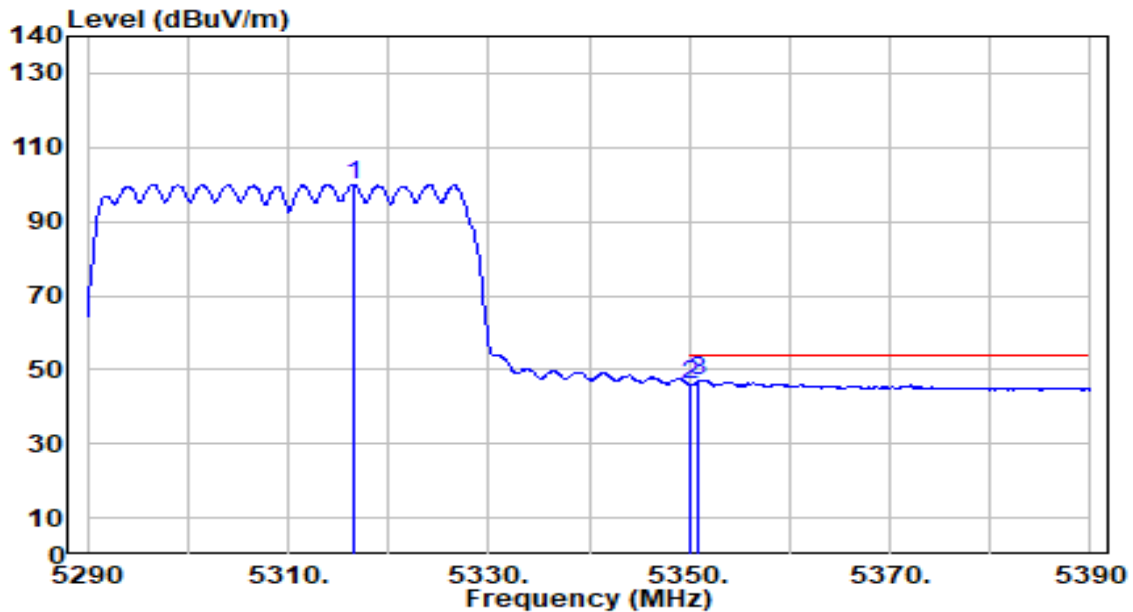


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.600	99.54	0.52	100.06	N/A	N/A	136	352	Average
2	5350.000	45.43	0.47	45.90	-8.10	54.00	136	352	Average
3	* 5351.000	46.60	0.47	47.07	-6.93	54.00	136	352	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

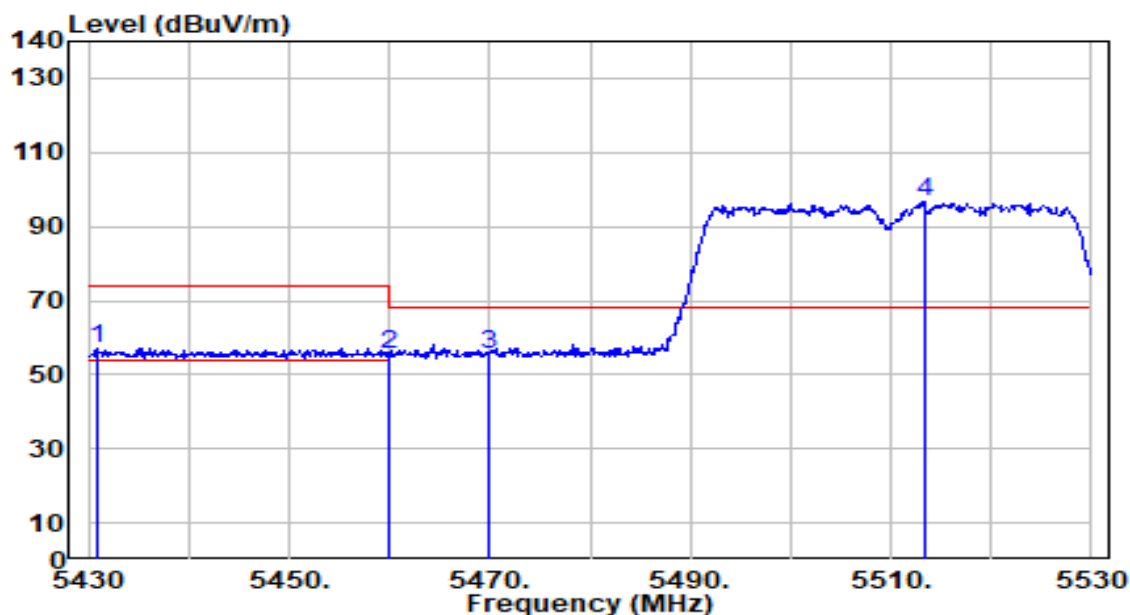


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5430.900	56.75	0.53	57.28	-16.72	74.00	100	354	Peak
2	5460.000	54.87	0.66	55.53	-18.47	74.00	100	354	Peak
3	* 5470.000	54.77	0.71	55.48	-12.72	68.20	100	354	Peak
4	5513.300	95.74	0.90	96.65	N/A	N/A	100	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

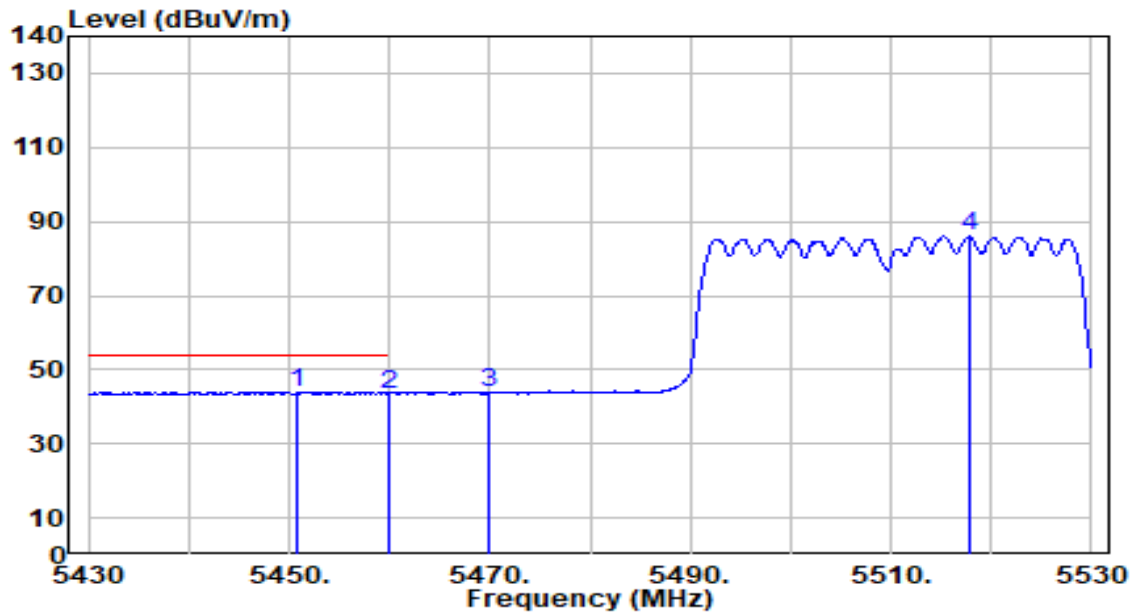


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.800	43.30	0.62	43.92	-10.08	54.00	100	354	Average
2		5460.000	42.90	0.66	43.56	-10.44	54.00	100	354	Average
3		5470.000	43.20	0.71	43.91	N/A	N/A	100	354	Average
4		5517.800	85.06	0.92	85.98	N/A	N/A	100	354	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

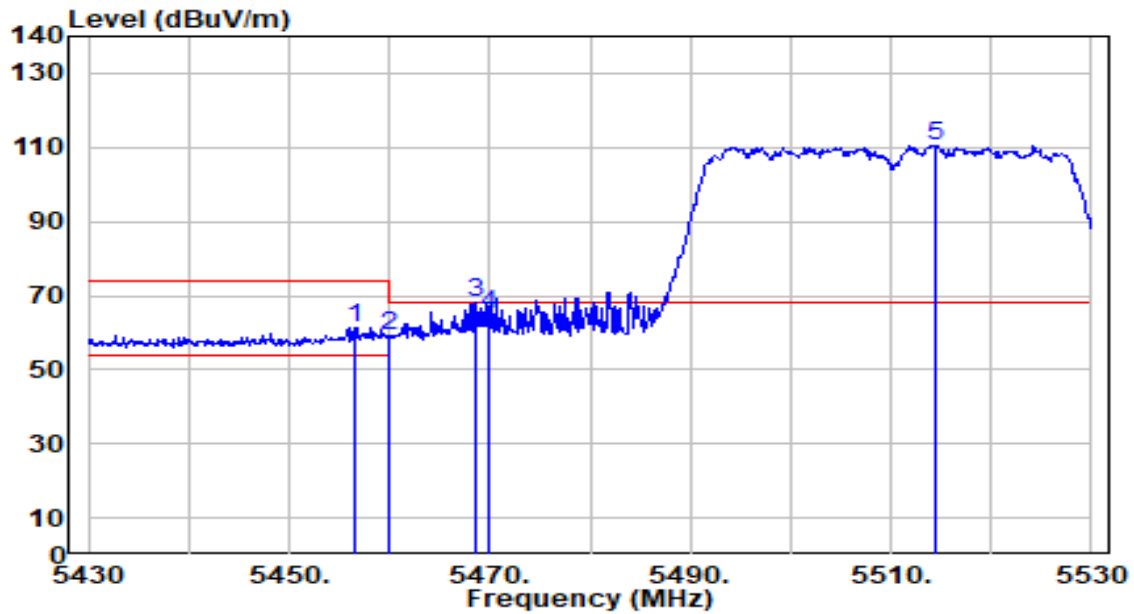


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.500	60.82	0.65	61.47	-12.53	74.00	160	346	Peak
2	5460.000	58.50	0.66	59.16	-14.84	74.00	160	346	Peak
3	* 5468.700	67.31	0.70	68.01	-0.19	68.20	160	346	Peak
4	5470.000	64.24	0.71	64.94	-3.26	68.20	160	346	Peak
5	5514.400	109.61	0.91	110.52	N/A	N/A	160	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

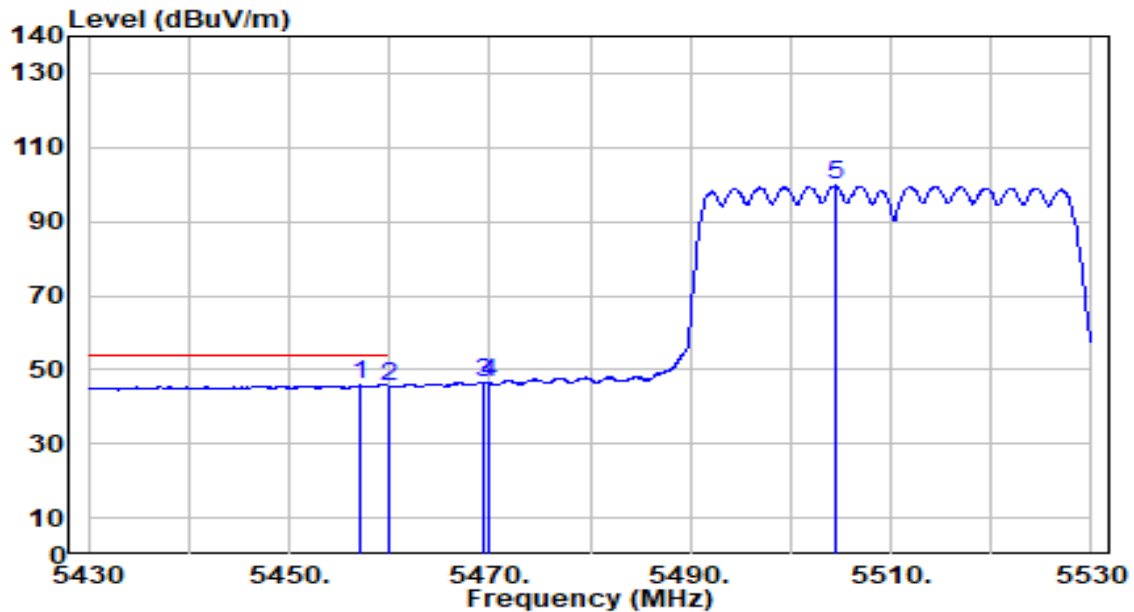


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.100	45.12	0.65	45.77	-8.23	54.00	160	346	Average
2		5460.000	44.77	0.66	45.43	-8.57	54.00	160	346	Average
3		5469.400	46.03	0.70	46.73	N/A	N/A	160	346	Average
4		5470.000	45.58	0.71	46.29	N/A	N/A	160	346	Average
5		5504.400	98.88	0.86	99.74	N/A	N/A	160	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

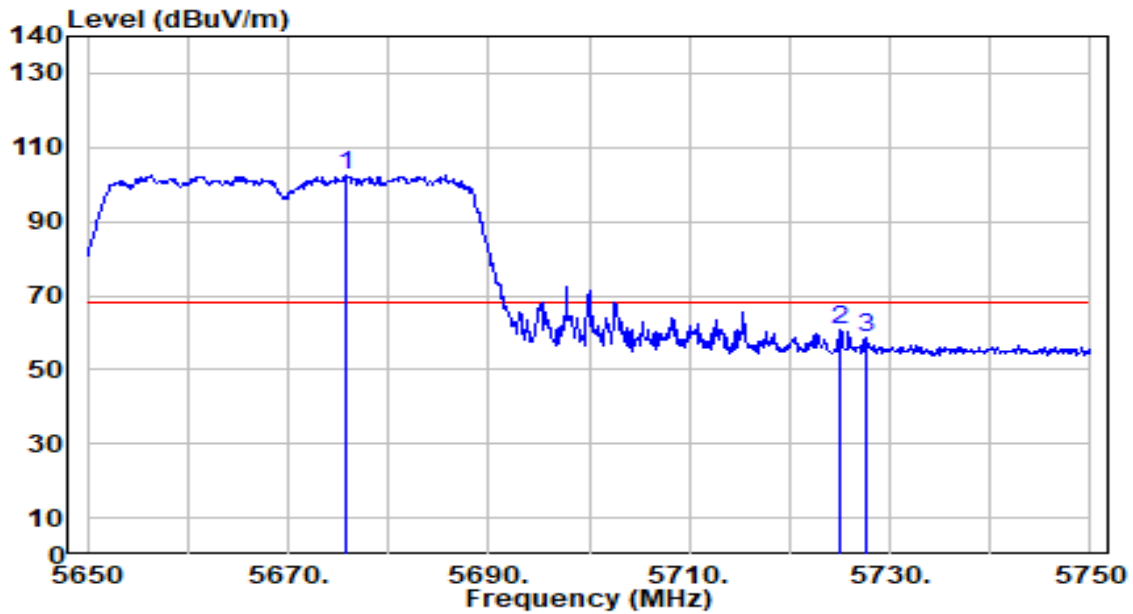


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5675.700	100.71	1.66	102.37	N/A	N/A	100	354	Peak
2	*	5725.000	58.64	1.89	60.54	-7.66	68.20	100	354	Peak
3		5727.700	56.67	1.91	58.58	-9.62	68.20	100	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

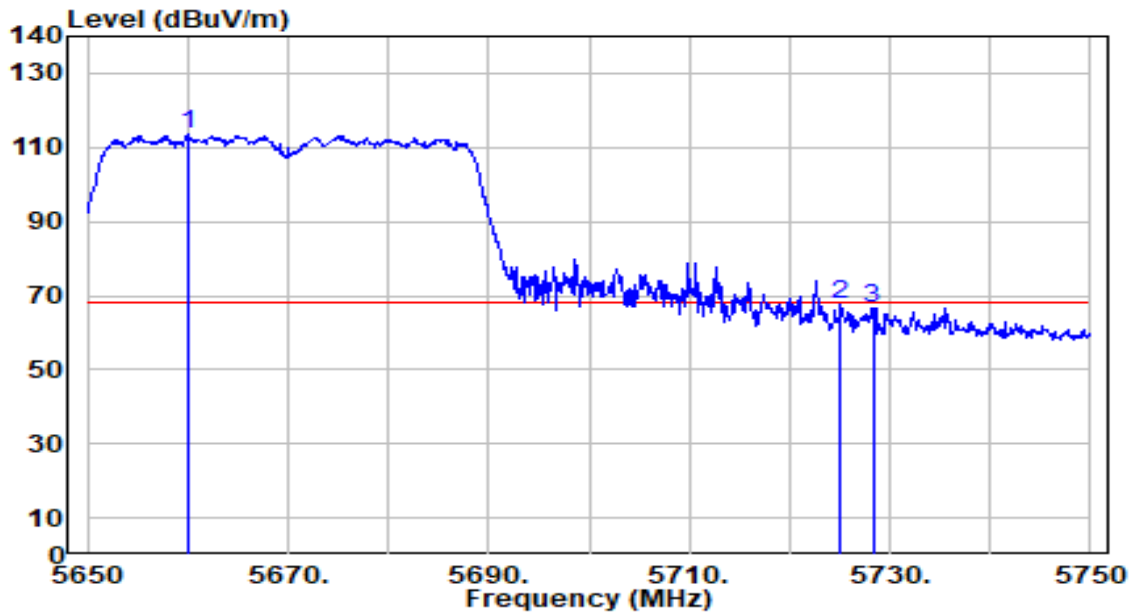


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5660.000	111.84	1.59	113.43	N/A	N/A	160	16	Peak
2	*	5725.000	65.90	1.89	67.79	-0.41	68.20	160	16	Peak
3		5728.300	64.84	1.91	66.75	-1.45	68.20	160	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

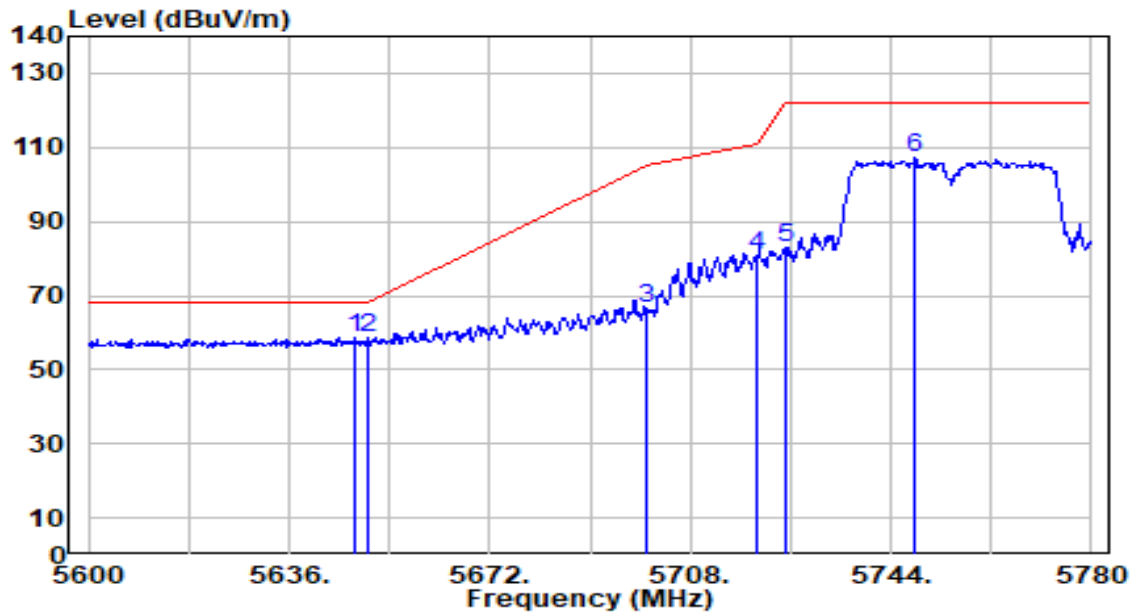


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.700	57.18	1.53	58.71	-9.49	68.20	130	357	Peak
2		5650.000	56.88	1.54	58.42	-9.78	68.20	130	357	Peak
3		5700.000	65.05	1.78	66.83	-38.37	105.20	130	357	Peak
4		5720.000	78.86	1.87	80.73	-30.07	110.80	130	357	Peak
5		5725.000	81.28	1.89	83.17	-39.03	122.20	130	357	Peak
6		5748.320	105.03	2.00	107.04	N/A	N/A	130	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

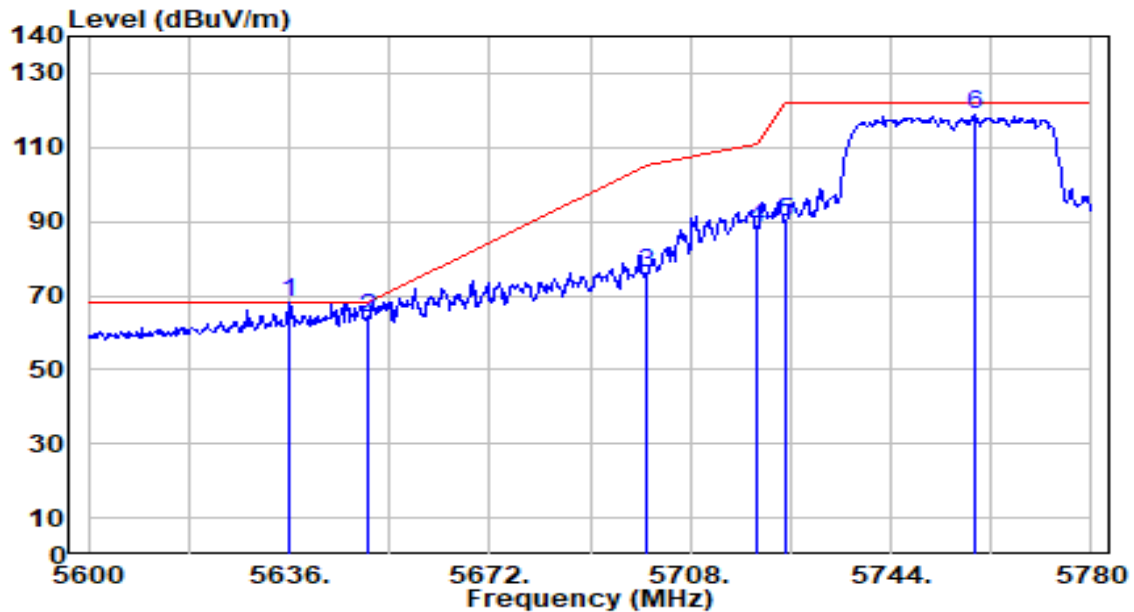


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.180	66.50	1.48	67.98	-0.22	68.20	200	0	Peak
2		5650.000	62.55	1.54	64.09	-4.11	68.20	200	0	Peak
3		5700.000	74.38	1.78	76.16	-29.04	105.20	200	0	Peak
4		5720.000	86.12	1.87	87.99	-22.81	110.80	200	0	Peak
5		5725.000	87.98	1.89	89.87	-32.33	122.20	200	0	Peak
6		5759.120	116.83	2.05	118.88	N/A	N/A	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

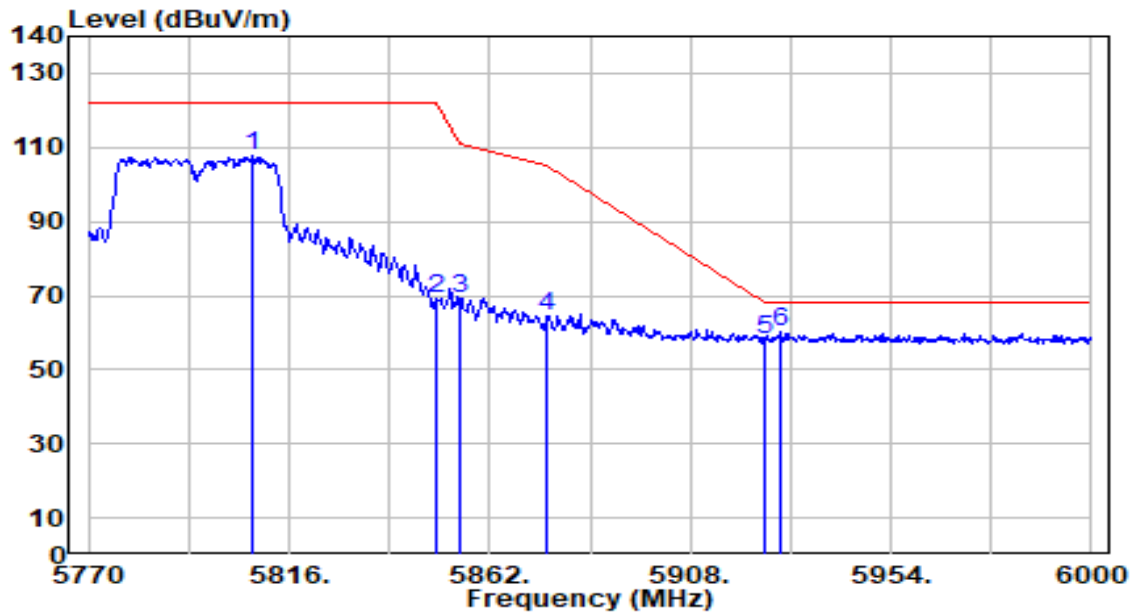


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5807.720	105.46	2.25	107.71	N/A	N/A	130	357	Peak
2	5850.000	66.95	2.25	69.21	-52.99	122.20	130	357	Peak
3	5855.000	66.91	2.25	69.16	-41.64	110.80	130	357	Peak
4	5875.000	62.31	2.26	64.57	-40.63	105.20	130	357	Peak
5	5925.000	55.84	2.27	58.11	-10.09	68.20	130	357	Peak
6	* 5928.930	58.02	2.27	60.28	-7.92	68.20	130	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

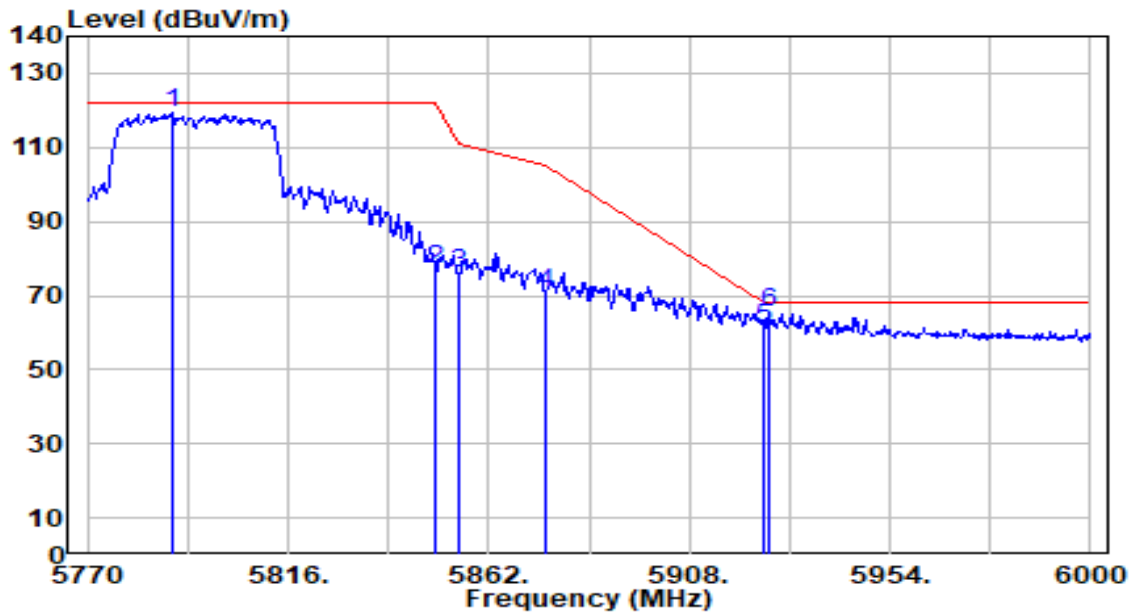


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5789.320	117.06	2.19	119.25	N/A	N/A	200	0	Peak
2	5850.000	74.78	2.25	77.03	-45.17	122.20	200	0	Peak
3	5855.000	73.62	2.25	75.87	-34.93	110.80	200	0	Peak
4	5875.000	68.57	2.26	70.83	-34.37	105.20	200	0	Peak
5	5925.000	59.27	2.27	61.54	-6.66	68.20	200	0	Peak
6	* 5926.170	63.01	2.27	65.27	-2.93	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

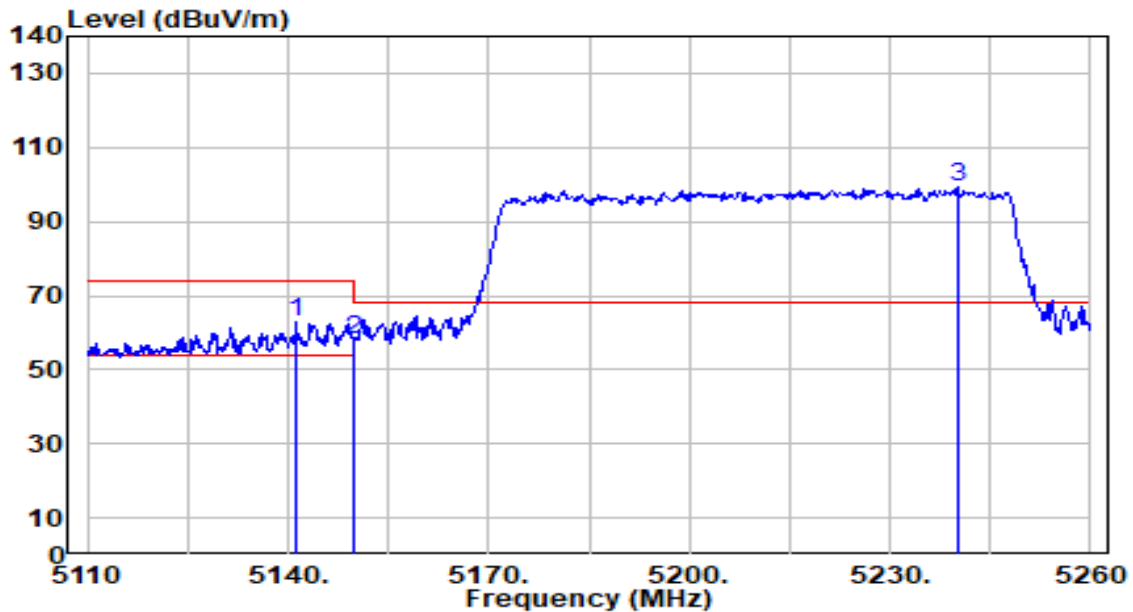


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.200	62.14	0.65	62.78	-11.22	74.00	150	343	Peak
2		5150.000	57.59	0.65	58.24	-15.76	74.00	150	343	Peak
3		5240.050	98.51	0.64	99.15	N/A	N/A	150	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

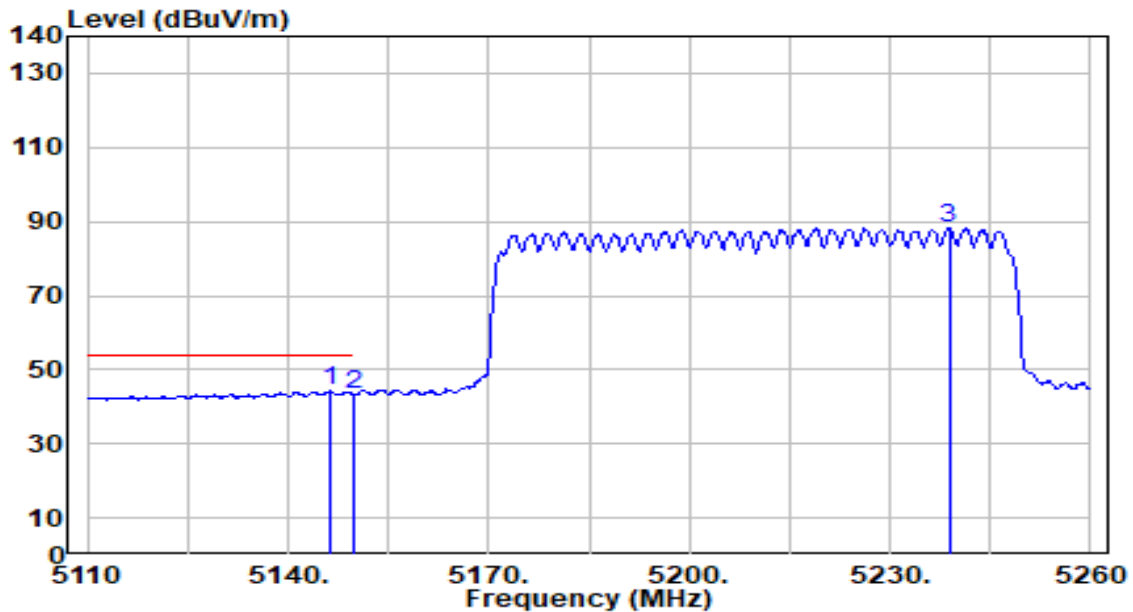


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.300	43.51	0.65	44.16	-9.84	54.00	150	343	Average
2		5150.000	42.45	0.65	43.10	-10.90	54.00	150	343	Average
3		5238.850	87.55	0.64	88.19	N/A	N/A	150	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

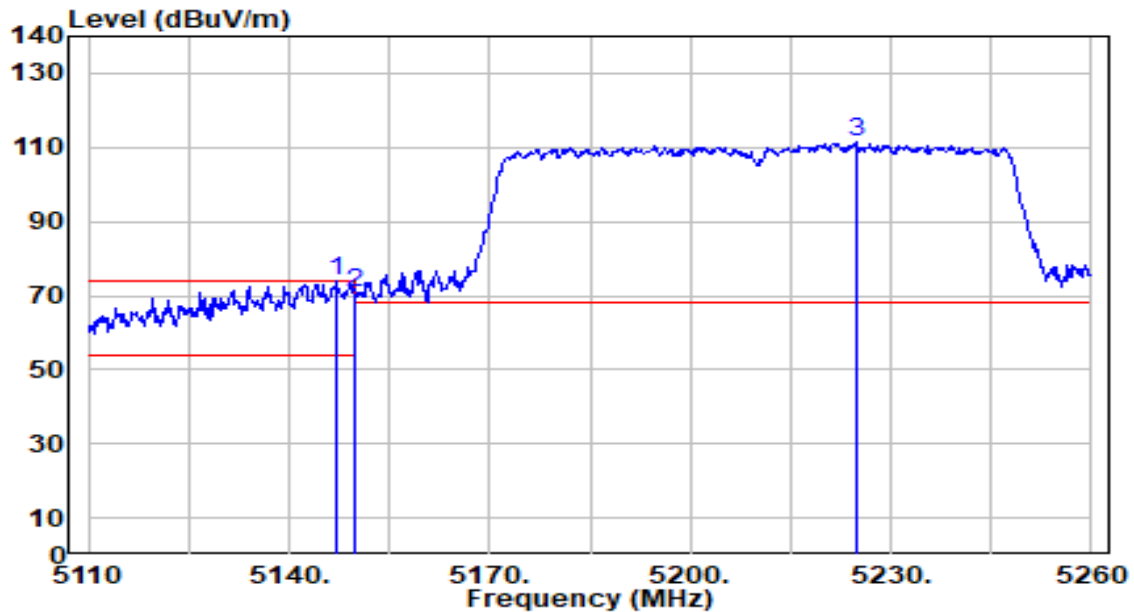


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.050	73.16	0.65	73.81	-0.19	74.00	136	32	Peak
2		5150.000	70.08	0.65	70.73	-3.27	74.00	136	32	Peak
3		5224.750	110.57	0.66	111.24	N/A	N/A	136	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

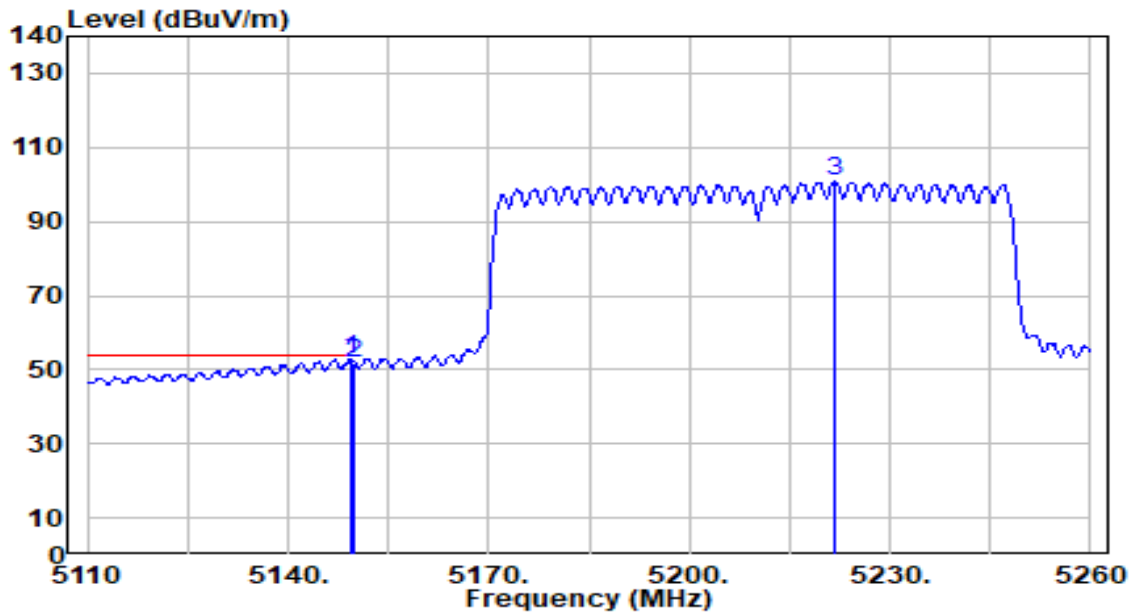


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.450	52.24	0.65	52.89	-1.11	54.00	136	32	Average
2		5150.000	50.97	0.65	51.63	-2.37	54.00	136	32	Average
3		5221.900	100.01	0.67	100.68	N/A	N/A	136	32	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

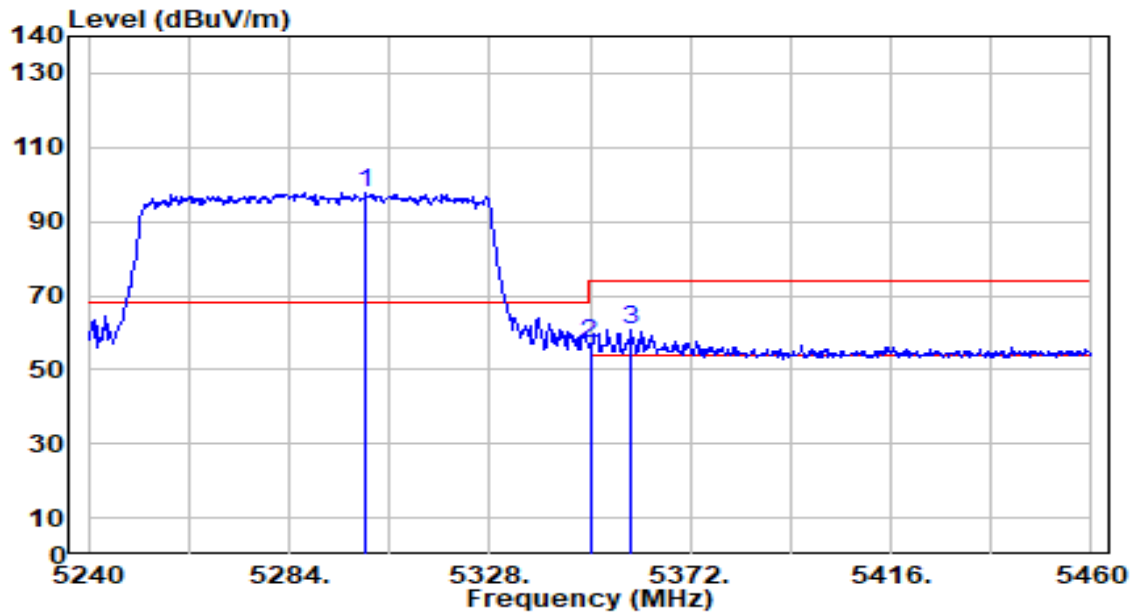


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.940	97.24	0.55	97.79	N/A	N/A	150	343	Peak
2	5350.000	56.43	0.47	56.90	-17.10	74.00	150	343	Peak
3	* 5359.020	60.29	0.46	60.75	-13.25	74.00	150	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

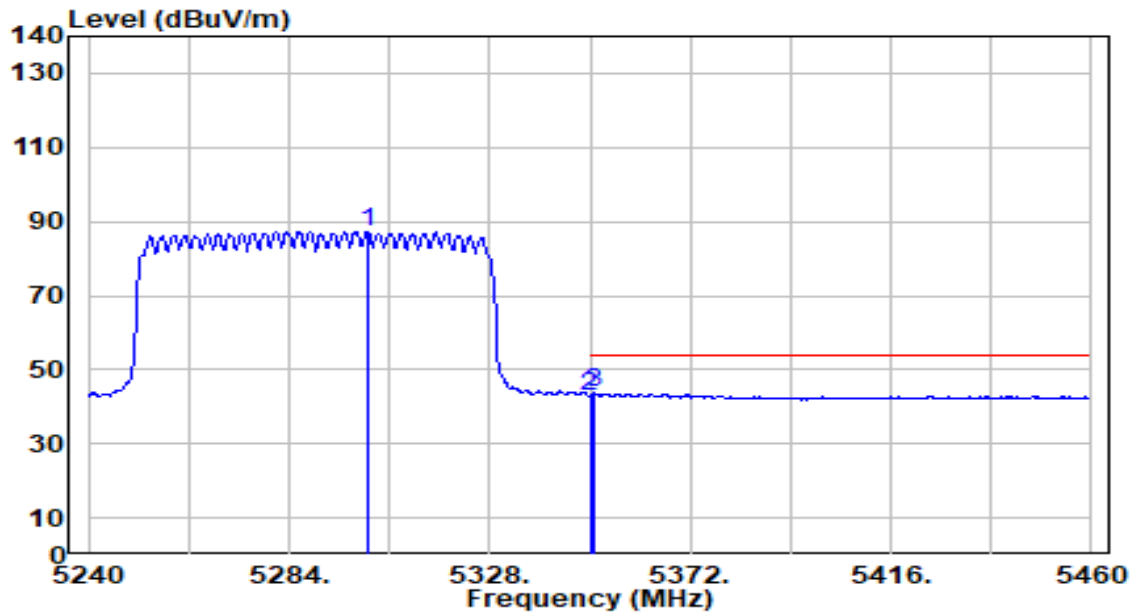


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.160	86.82	0.55	87.37	N/A	N/A	150	343	Average
2	5350.000	42.31	0.47	42.78	-11.22	54.00	150	343	Average
3	* 5351.100	43.23	0.47	43.70	-10.30	54.00	150	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

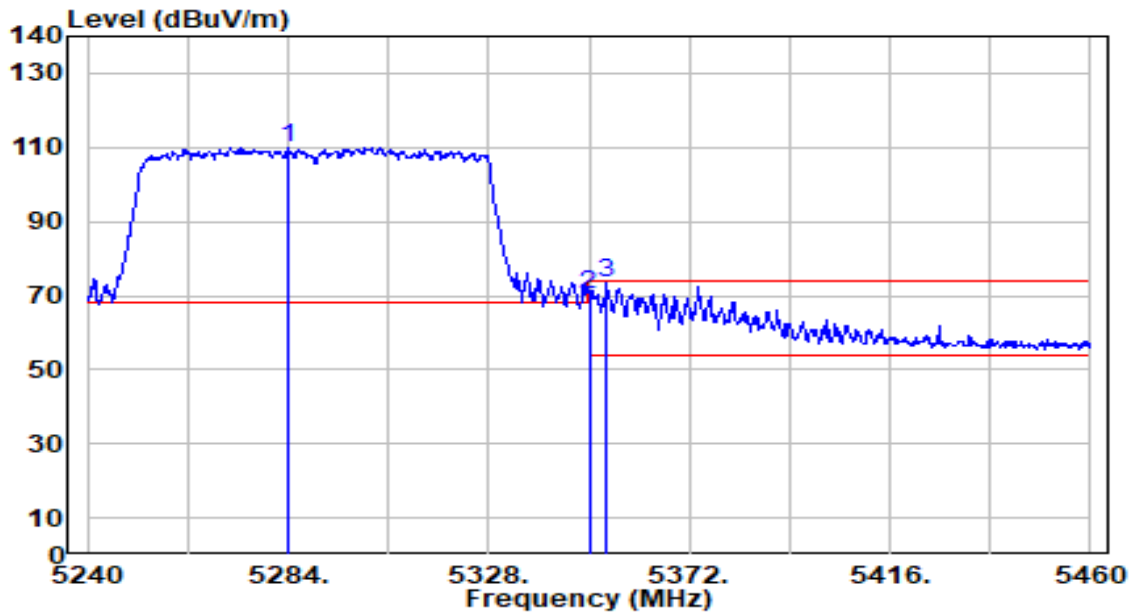


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5283.780	109.32	0.57	109.90	N/A	N/A	136	33	Peak
2	5350.000	69.94	0.47	70.41	-3.59	74.00	136	33	Peak
3	* 5353.740	72.80	0.47	73.26	-0.74	74.00	136	33	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

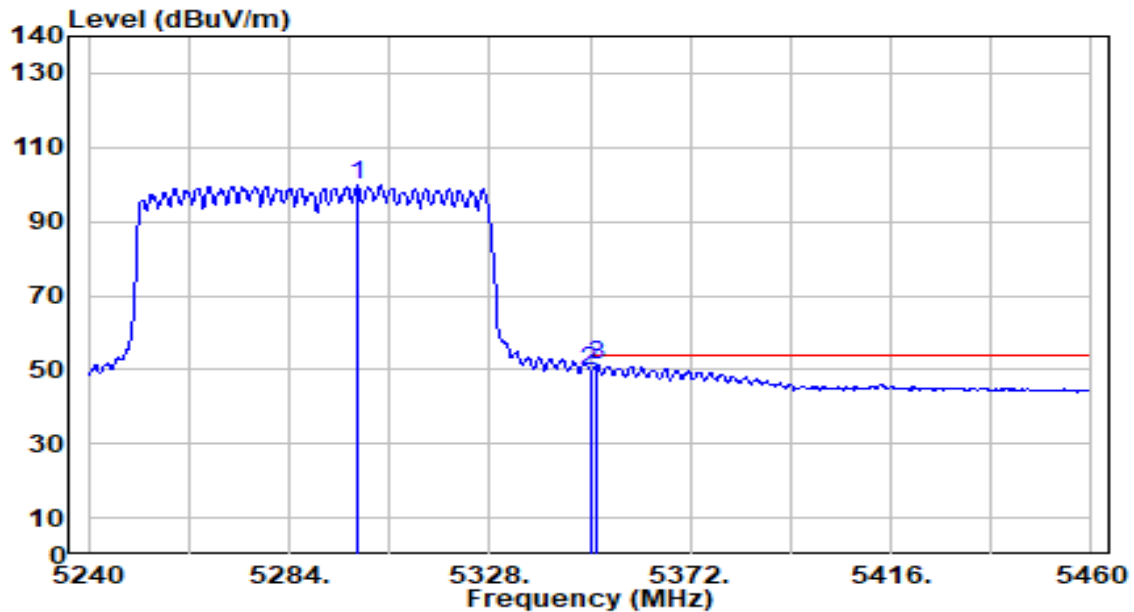


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.960	99.09	0.55	99.64	N/A	N/A	136	33	Average
2	5350.000	48.98	0.47	49.45	-4.55	54.00	136	33	Average
3	* 5351.540	50.79	0.47	51.26	-2.74	54.00	136	33	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

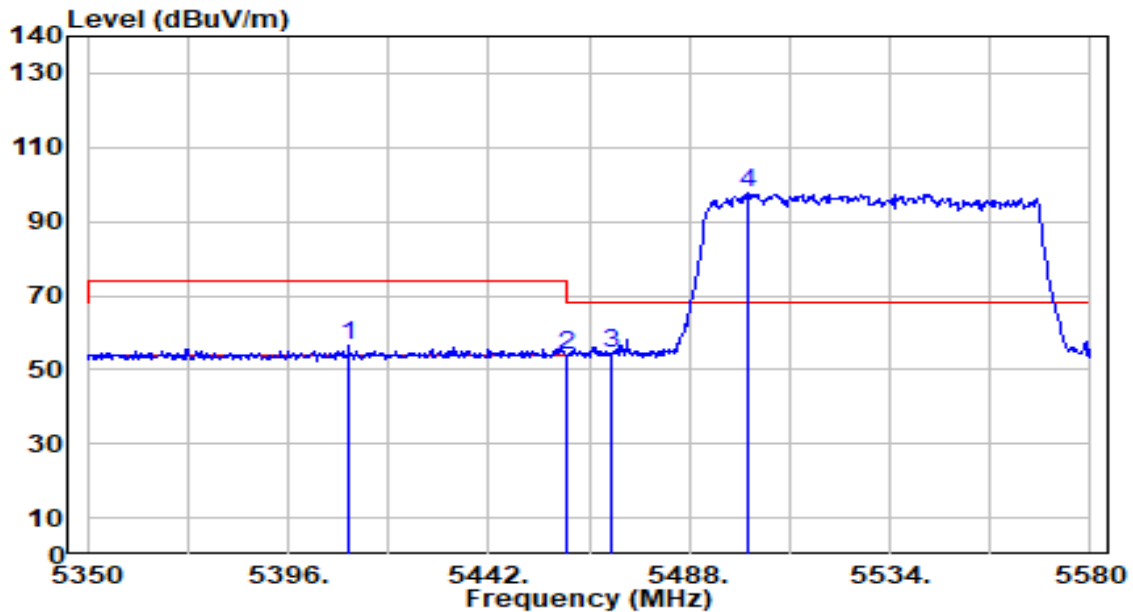


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5409.800	55.95	0.44	56.39	-17.61	74.00	160	346	Peak
2	5460.000	53.22	0.66	53.88	-20.12	74.00	160	346	Peak
3	* 5470.000	53.64	0.71	54.35	-13.85	68.20	160	346	Peak
4	5501.340	96.76	0.85	97.60	N/A	N/A	160	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

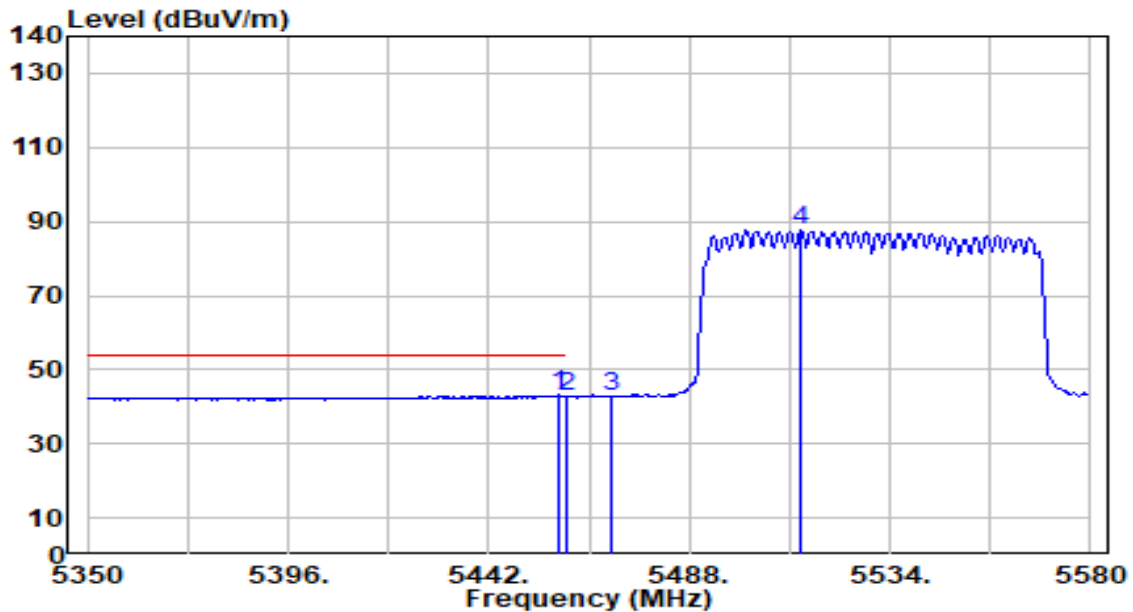


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.330	42.55	0.65	43.21	-10.79	54.00	160	346	Average
2		5460.000	41.94	0.66	42.60	-11.40	54.00	160	346	Average
3		5470.000	42.00	0.71	42.71	N/A	N/A	160	346	Average
4		5513.760	86.58	0.90	87.49	N/A	N/A	160	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

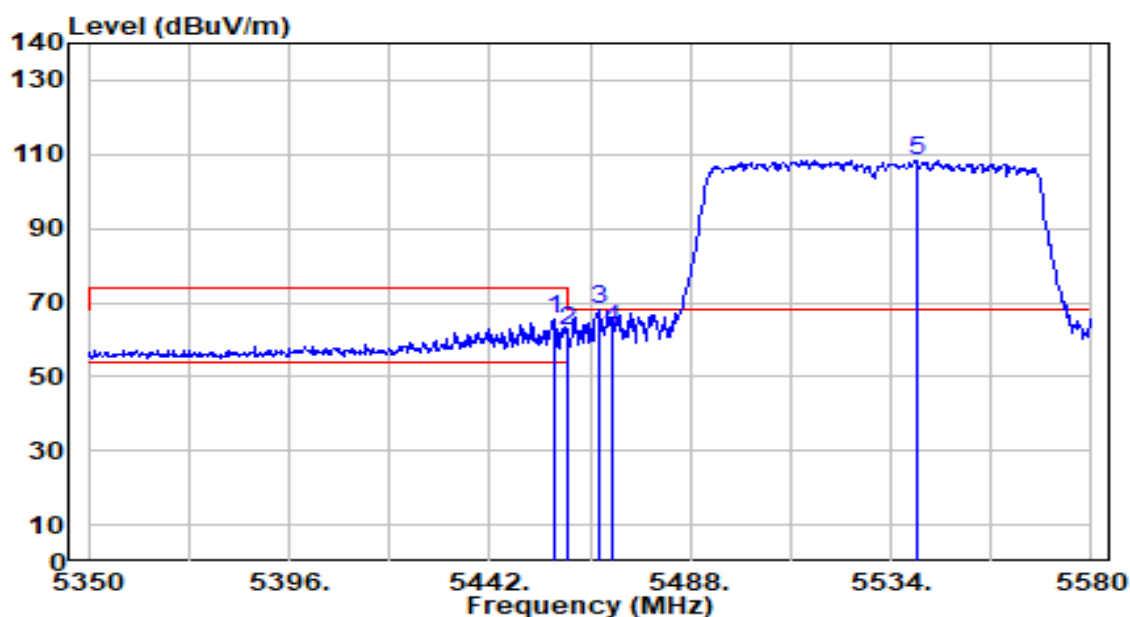


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.720	64.69	0.65	65.33	-8.67	74.00	160	354	Peak
2	5460.000	61.53	0.66	62.19	-11.81	74.00	160	354	Peak
3	* 5466.840	67.31	0.69	68.01	-0.19	68.20	160	354	Peak
4	5470.000	62.28	0.71	62.99	-5.21	68.20	160	354	Peak
5	5539.750	107.24	1.03	108.27	N/A	N/A	160	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

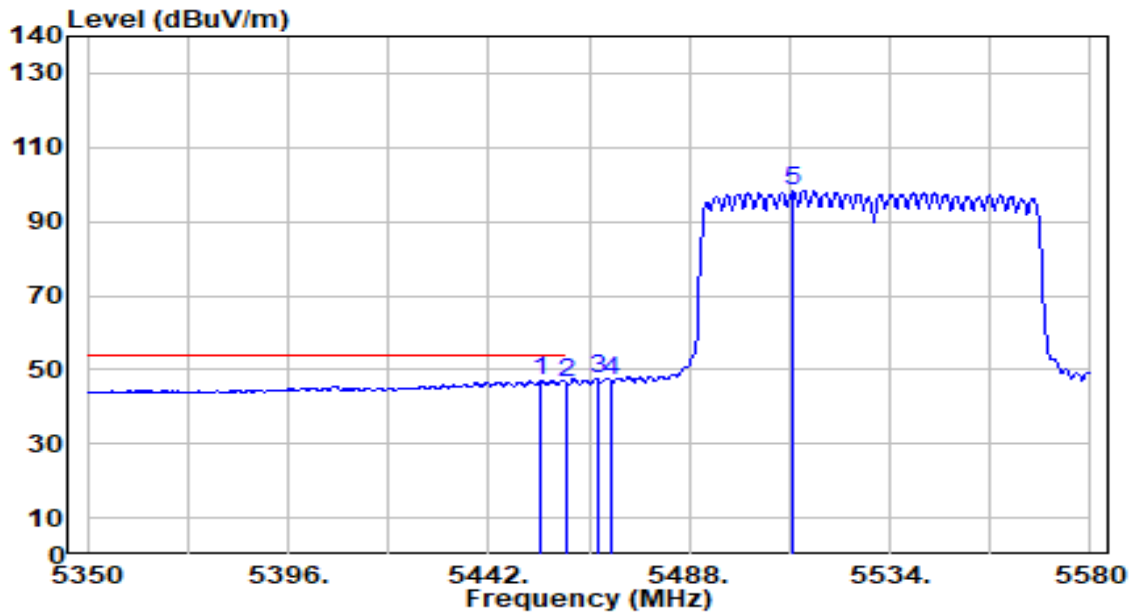


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.960	46.50	0.63	47.14	-6.86	54.00	160	354	Average
2		5460.000	45.76	0.66	46.42	-7.58	54.00	160	354	Average
3		5466.840	46.74	0.69	47.43	N/A	N/A	160	354	Average
4		5470.000	46.11	0.71	46.82	N/A	N/A	160	354	Average
5		5511.690	97.28	0.89	98.17	N/A	N/A	160	354	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

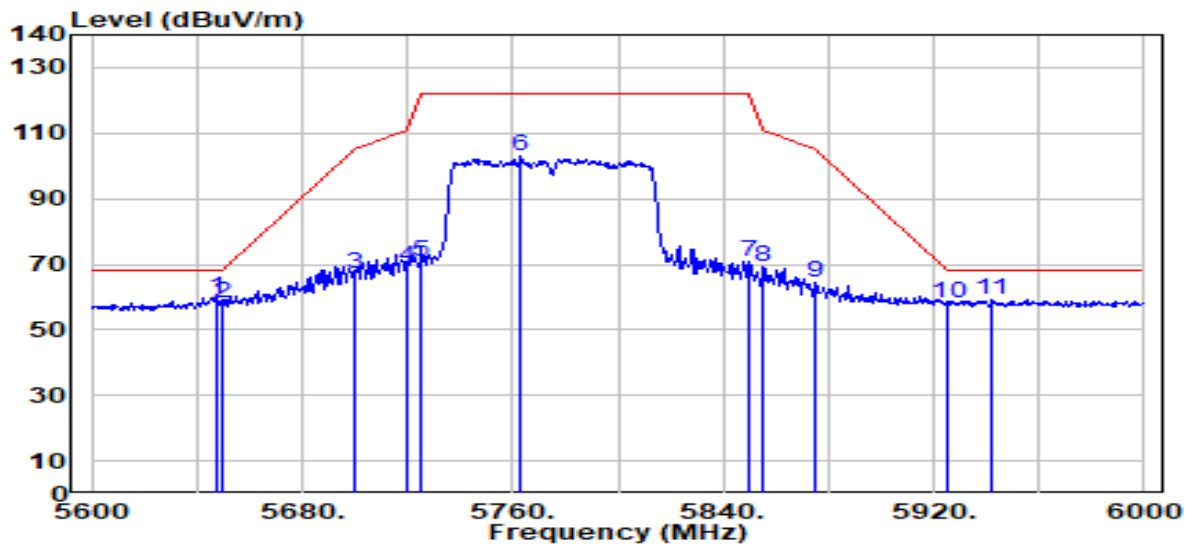


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	58.27	1.53	59.80	-8.40	68.20	130	355	Peak
2		5650.000	56.72	1.54	58.26	-9.94	68.20	130	355	Peak
3		5700.000	65.23	1.78	67.00	-38.20	105.20	130	355	Peak
4		5720.000	67.13	1.87	69.00	-41.80	110.80	130	355	Peak
5		5725.000	68.86	1.89	70.76	-51.44	122.20	130	355	Peak
6		5763.200	100.76	2.07	102.83	N/A	N/A	130	355	Peak
7		5850.000	68.43	2.25	70.68	-51.52	122.20	130	355	Peak
8		5855.000	66.99	2.25	69.24	-41.56	110.80	130	355	Peak
9		5875.000	62.07	2.26	64.33	-40.87	105.20	130	355	Peak
10		5925.000	55.98	2.27	58.25	-9.95	68.20	130	355	Peak
11		5942.000	56.69	2.27	58.96	-9.24	68.20	130	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

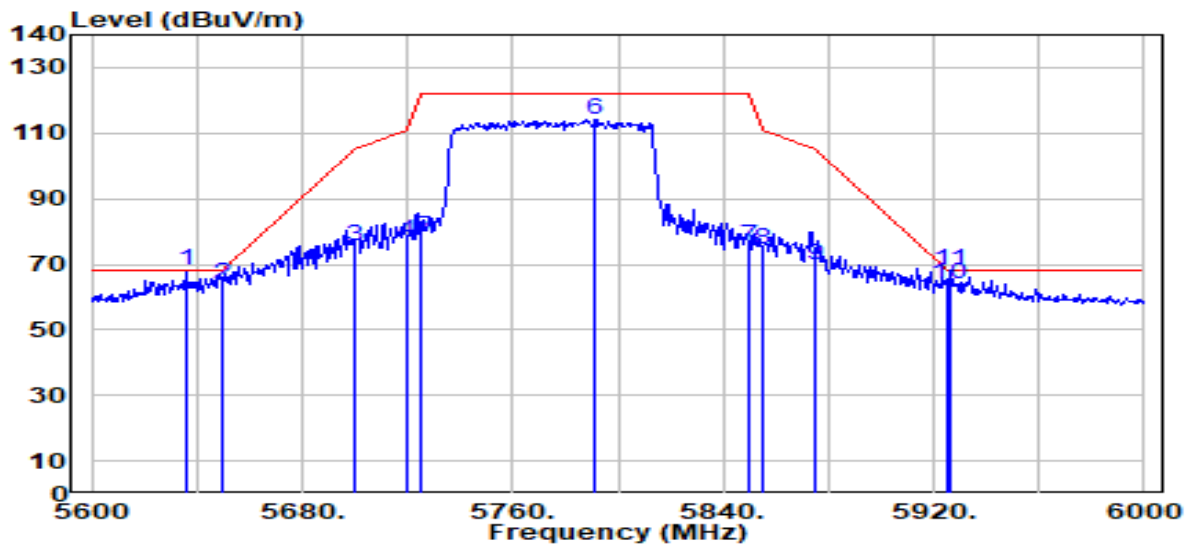


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.000	66.55	1.48	68.03	-0.17	68.20	200	1	Peak
2		5650.000	62.19	1.54	63.74	-4.46	68.20	200	1	Peak
3		5700.000	73.57	1.78	75.34	-29.86	105.20	200	1	Peak
4		5720.000	75.17	1.87	77.04	-33.76	110.80	200	1	Peak
5		5725.000	76.56	1.89	78.45	-43.75	122.20	200	1	Peak
6		5791.200	111.77	2.20	113.98	N/A	N/A	200	1	Peak
7		5850.000	73.11	2.25	75.36	-46.84	122.20	200	1	Peak
8		5855.000	72.10	2.25	74.36	-36.44	110.80	200	1	Peak
9		5875.000	67.51	2.26	69.77	-35.43	105.20	200	1	Peak
10		5925.000	61.66	2.27	63.93	-4.27	68.20	200	1	Peak
11		5926.400	65.69	2.27	67.96	-0.24	68.20	200	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

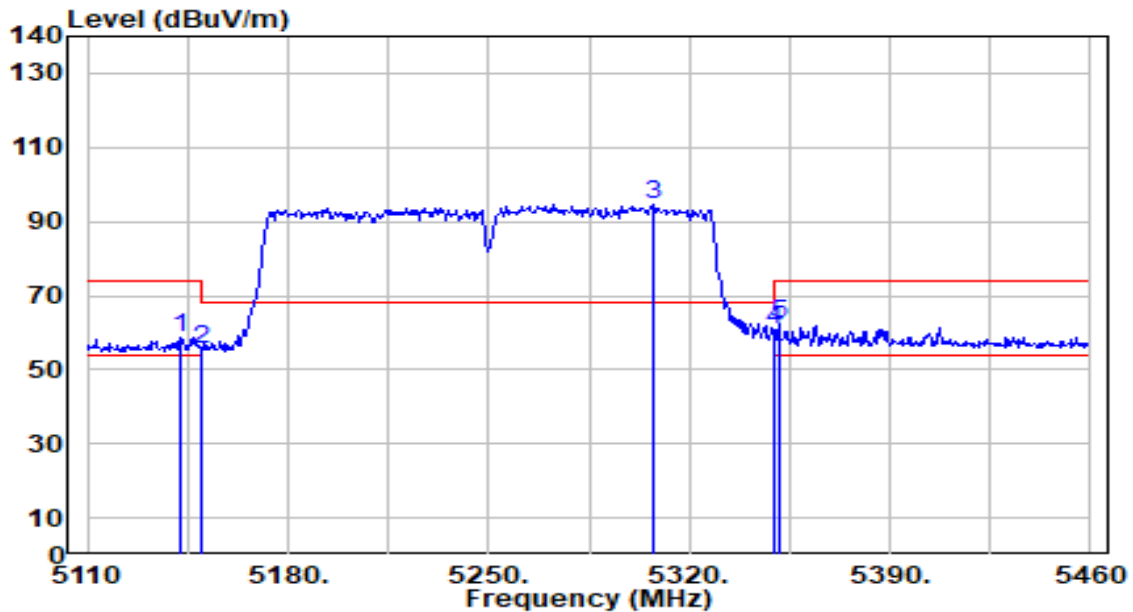


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5142.200	58.25	0.65	58.90	-15.10	74.00	150	18	Peak
2	5150.000	54.96	0.65	55.61	-18.39	74.00	150	18	Peak
3	5307.400	93.84	0.54	94.38	N/A	N/A	150	18	Peak
4	5350.000	60.51	0.47	60.98	-13.02	74.00	150	18	Peak
5	* 5351.500	61.61	0.47	62.08	-11.92	74.00	150	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

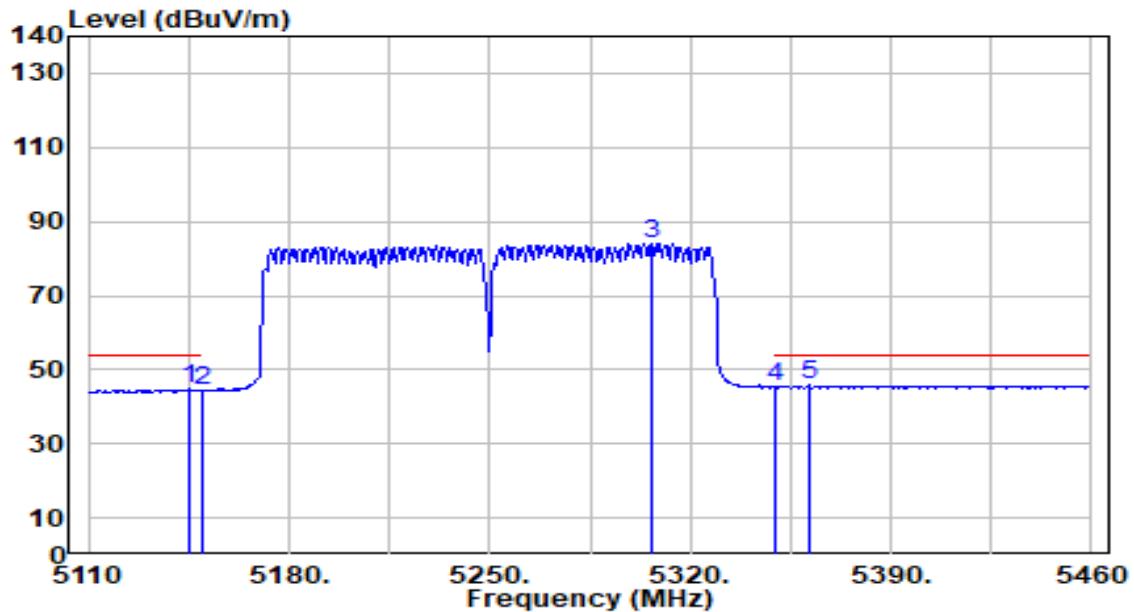


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5145.000	44.00	0.65	44.65	-9.35	54.00	150	18	Average
2	5150.000	43.50	0.65	44.16	-9.84	54.00	150	18	Average
3	5306.350	83.72	0.54	84.26	N/A	N/A	150	18	Average
4	5350.000	44.84	0.47	45.31	-8.69	54.00	150	18	Average
5	* 5361.650	45.27	0.45	45.72	-8.28	54.00	150	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

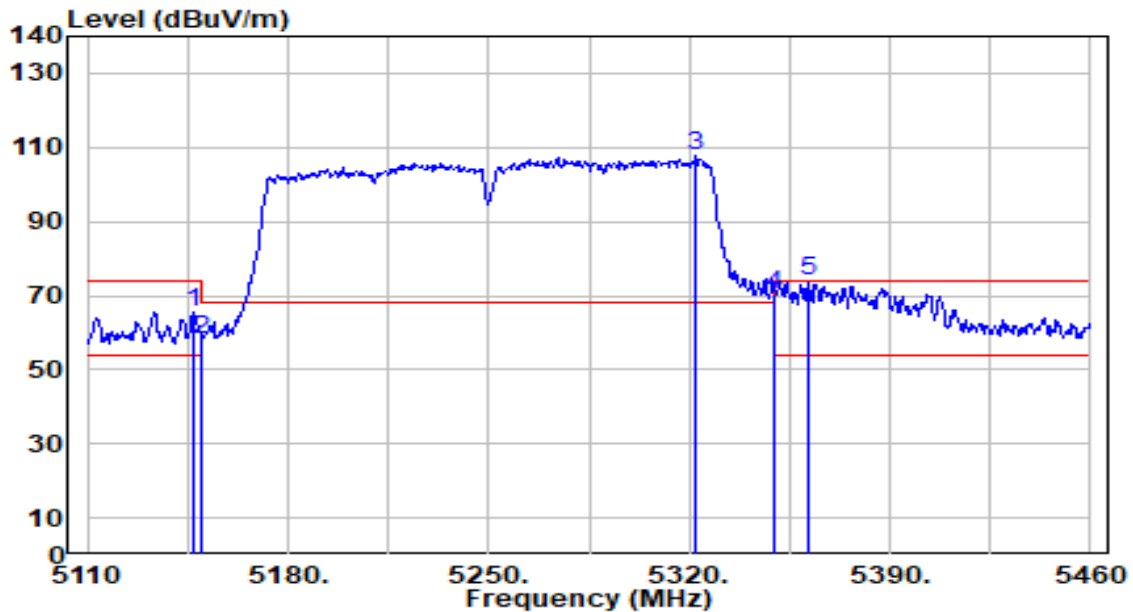


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.450	64.83	0.65	65.48	-8.52	74.00	200	357	Peak
2	5150.000	57.24	0.65	57.89	-16.11	74.00	200	357	Peak
3	5322.100	107.16	0.51	107.67	N/A	N/A	200	357	Peak
4	5350.000	69.95	0.47	70.42	-3.58	74.00	200	357	Peak
5	* 5361.650	73.36	0.45	73.81	-0.19	74.00	200	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

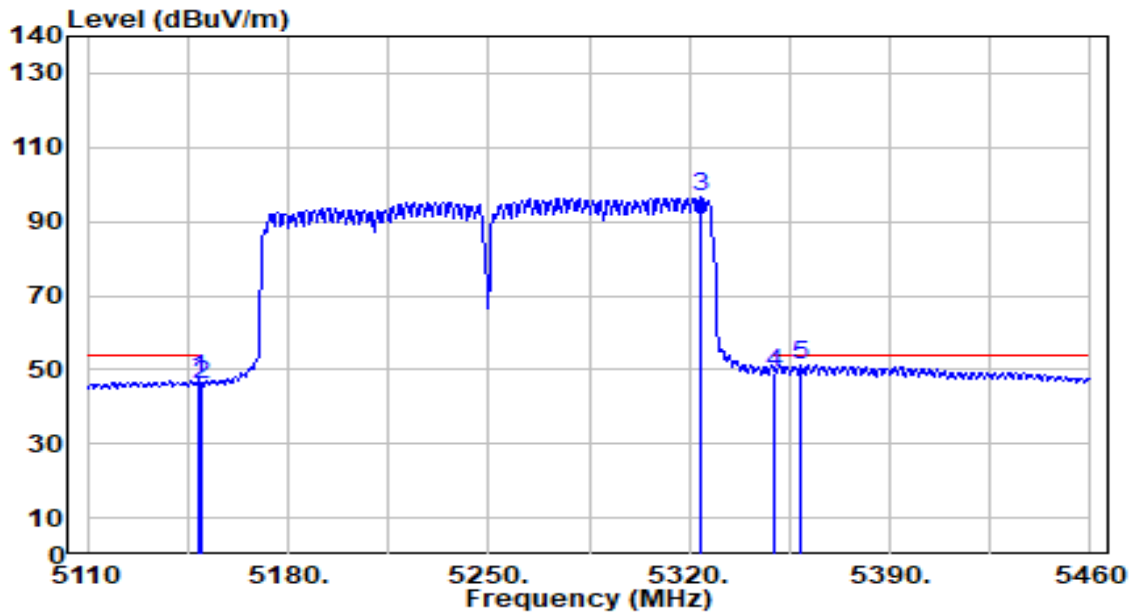


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.850	46.70	0.65	47.35	-6.65	54.00	200	357	Average
2	5150.000	45.17	0.65	45.83	-8.17	54.00	200	357	Average
3	5324.200	96.01	0.51	96.52	N/A	N/A	200	357	Average
4	5350.000	48.53	0.47	49.00	-5.00	54.00	200	357	Average
5	* 5358.850	50.87	0.46	51.33	-2.67	54.00	200	357	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

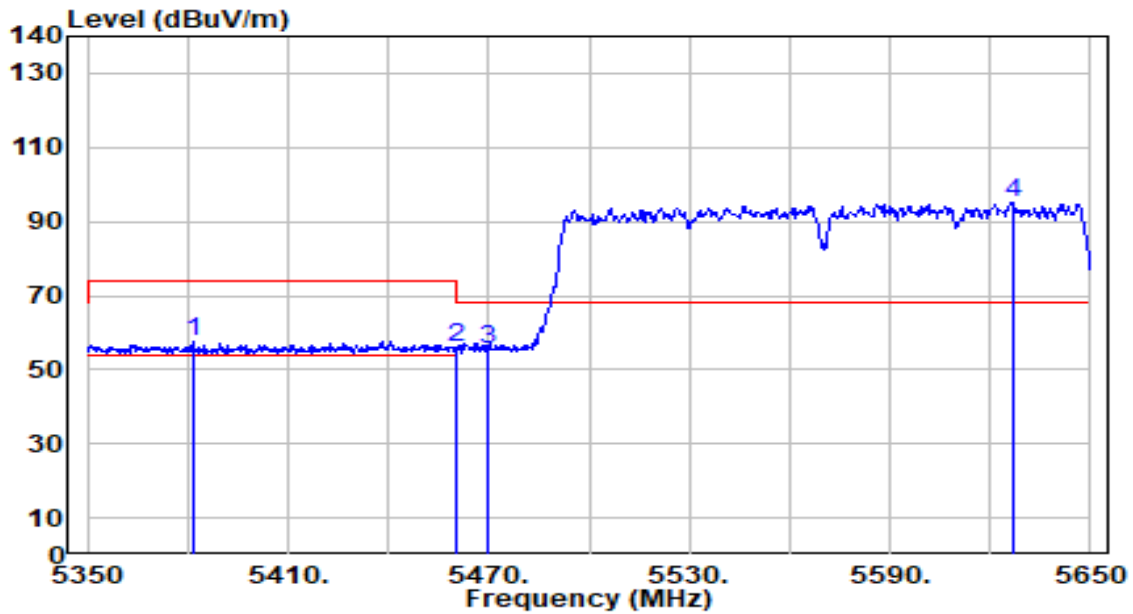


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5381.500	57.22	0.42	57.64	-16.36	74.00	100	353	Peak
2	5460.000	55.33	0.66	55.99	-18.01	74.00	100	353	Peak
3	* 5470.000	54.58	0.71	55.28	-12.92	68.20	100	353	Peak
4	5626.600	93.55	1.43	94.98	N/A	N/A	100	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

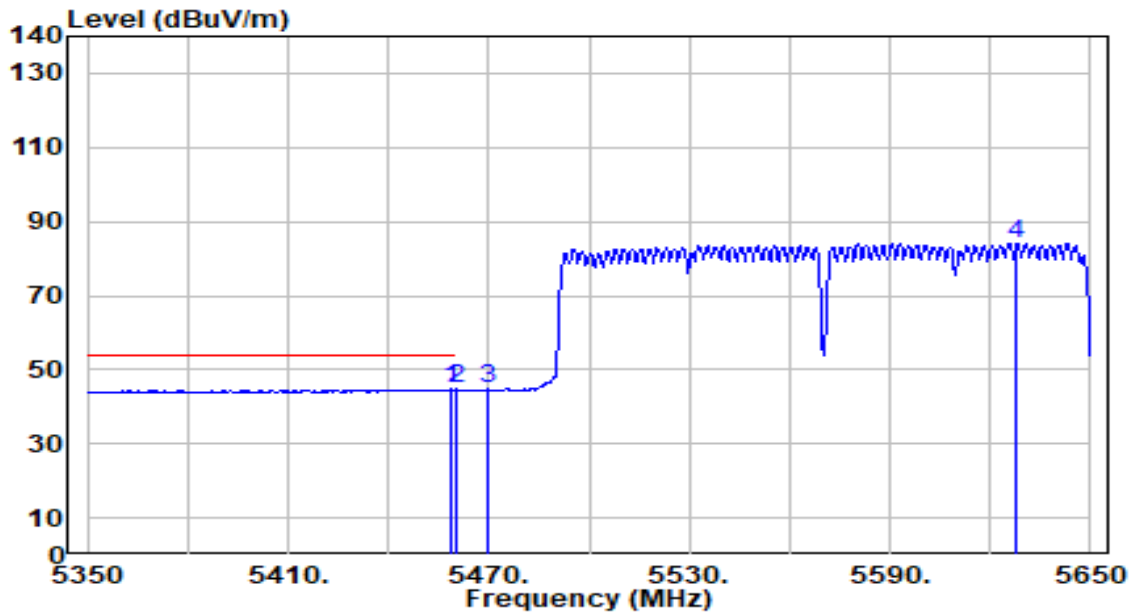


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.600	44.03	0.66	44.68	-9.32	54.00	100	353	Average
2	*	5460.000	44.10	0.66	44.76	-9.24	54.00	100	353	Average
3		5470.000	43.94	0.71	44.65	N/A	N/A	100	353	Average
4		5628.100	82.67	1.44	84.11	N/A	N/A	100	353	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

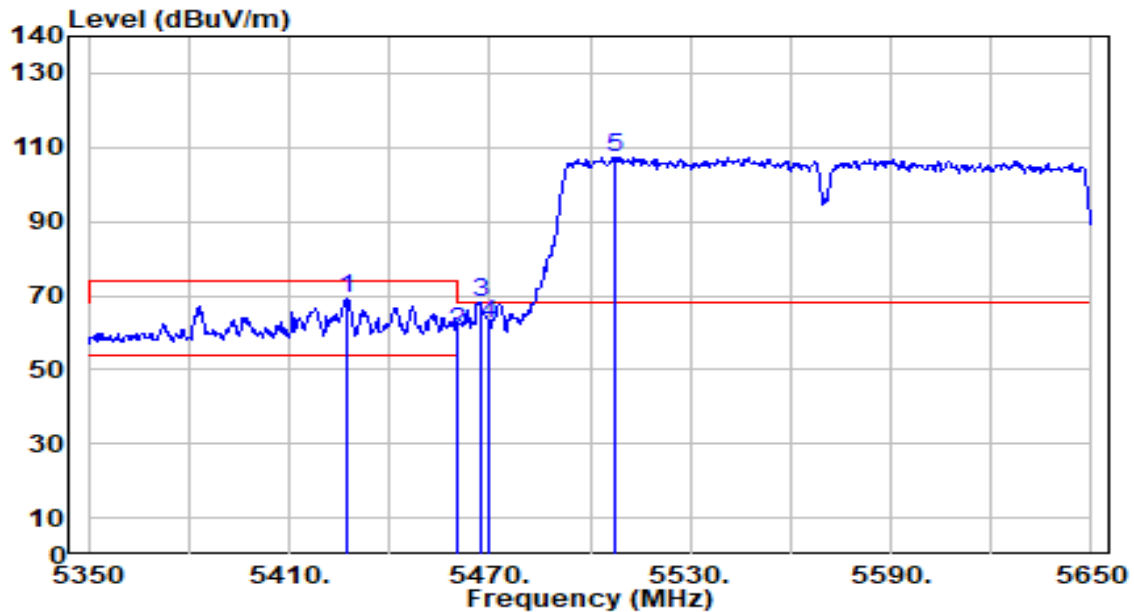


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5427.100	68.80	0.51	69.32	-4.68	74.00	160	0	Peak
2	5460.000	59.69	0.66	60.35	-13.65	74.00	160	0	Peak
3	* 5467.300	67.28	0.69	67.97	-0.23	68.20	160	0	Peak
4	5470.000	61.61	0.71	62.32	-5.88	68.20	160	0	Peak
5	5507.500	106.61	0.88	107.48	N/A	N/A	160	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

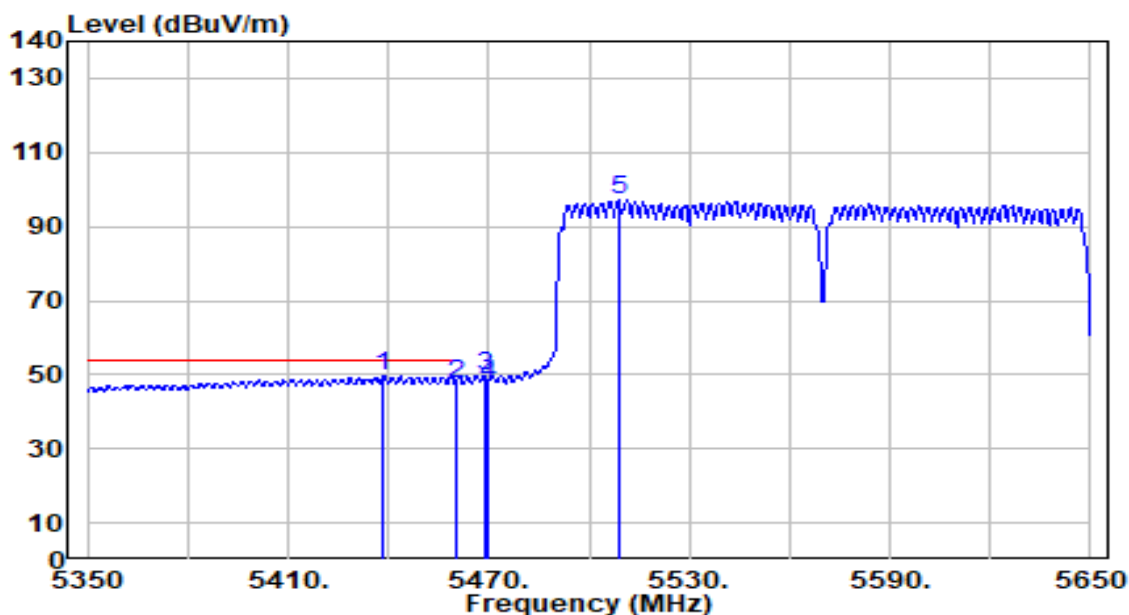


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5438.500	49.09	0.57	49.65	-4.35	54.00	160	0	Average
2		5460.000	46.95	0.66	47.61	-6.39	54.00	160	0	Average
3		5468.800	49.07	0.70	49.78	N/A	N/A	160	0	Average
4		5470.000	46.99	0.71	47.70	N/A	N/A	160	0	Average
5		5508.700	96.18	0.88	97.06	N/A	N/A	160	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

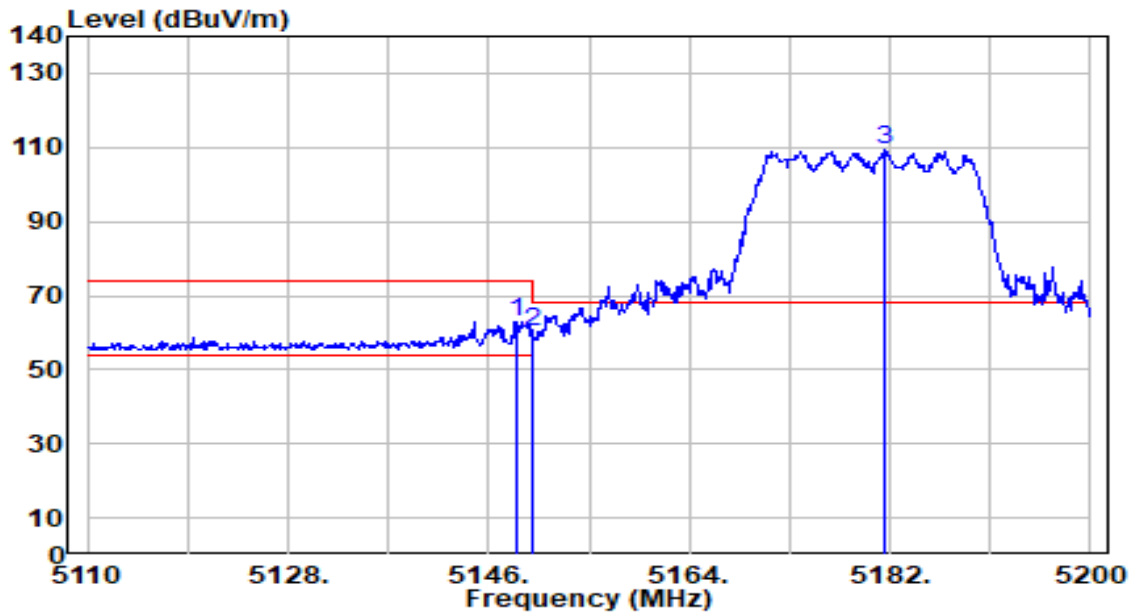


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.610	62.39	0.65	63.04	-10.96	74.00	150	18	Peak
2		5150.000	59.31	0.65	59.96	-14.04	74.00	150	18	Peak
3		5181.550	108.68	0.68	109.36	N/A	N/A	150	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

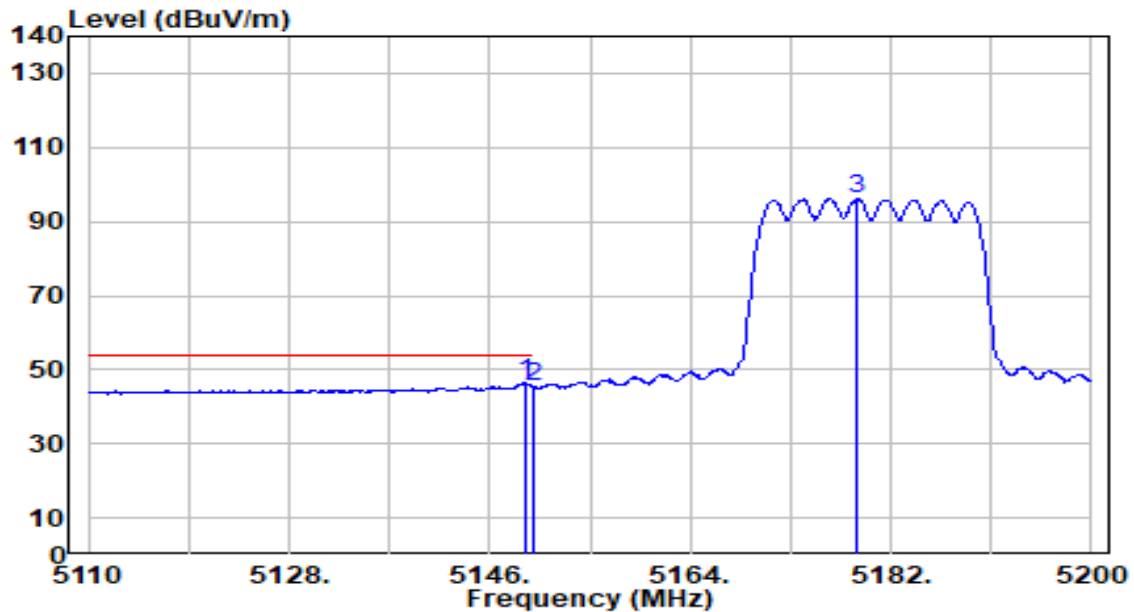


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.240	45.77	0.65	46.42	-7.58	54.00	150	18	Average
2		5150.000	44.57	0.65	45.22	-8.78	54.00	150	18	Average
3		5179.030	95.51	0.68	96.19	N/A	N/A	150	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

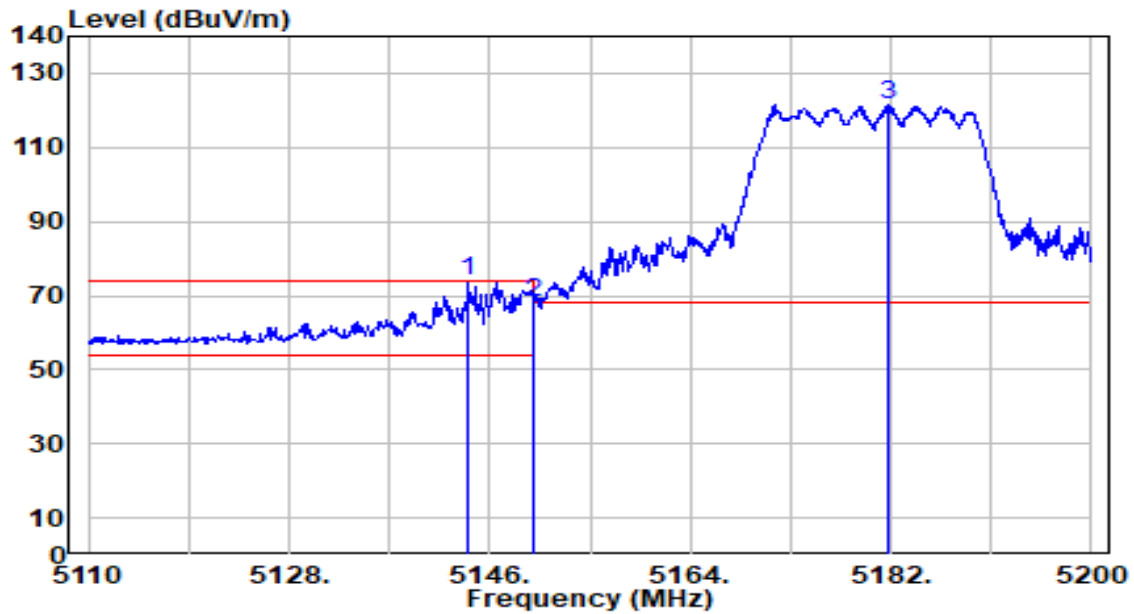


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.020	73.18	0.65	73.82	-0.18	74.00	136	35	Peak
2		5150.000	67.70	0.65	68.36	-5.64	74.00	136	35	Peak
3		5181.730	121.02	0.68	121.70	N/A	N/A	136	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

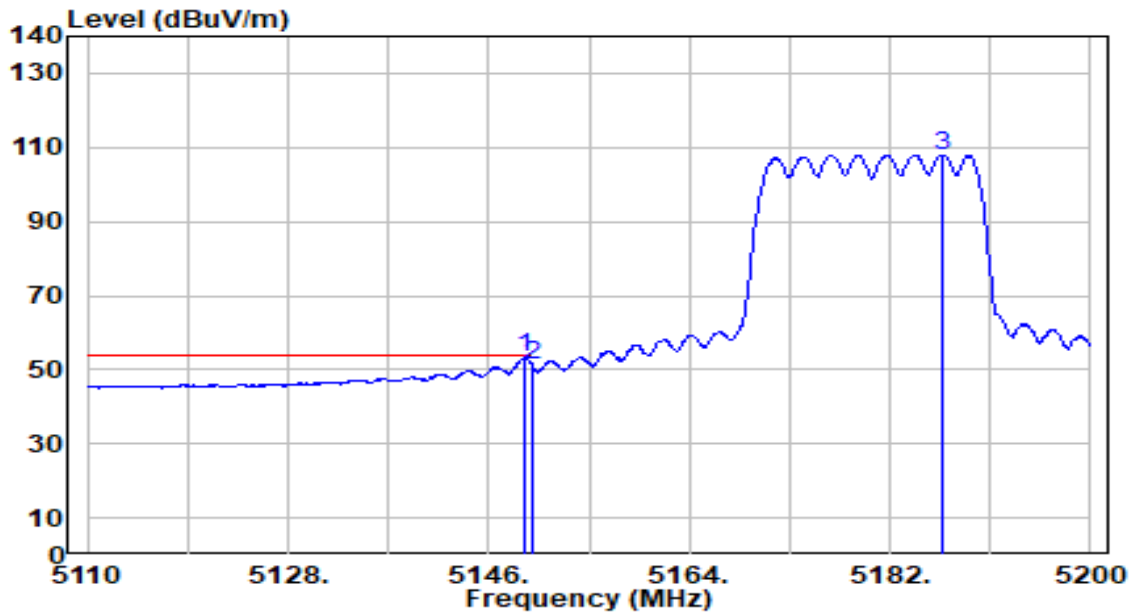


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.330	52.56	0.65	53.21	-0.79	54.00	136	35	Average
2		5150.000	50.34	0.65	51.00	-3.00	54.00	136	35	Average
3		5186.680	107.33	0.69	108.02	N/A	N/A	136	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

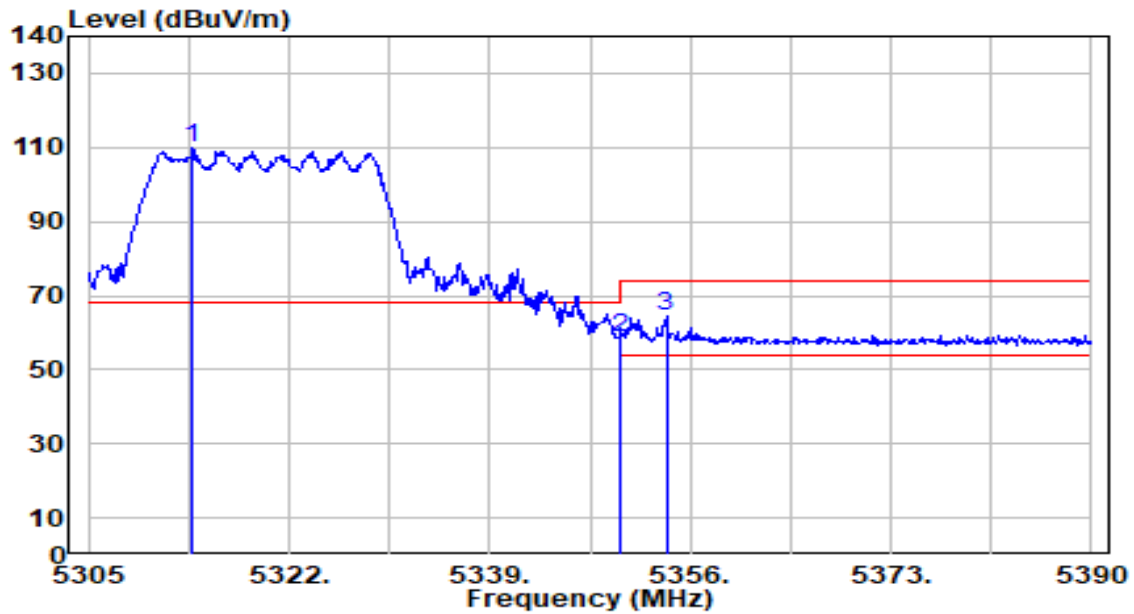


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.755	109.34	0.53	109.86	N/A	N/A	150	18	Peak
2	5350.000	58.42	0.47	58.89	-15.11	74.00	150	18	Peak
3	* 5353.960	63.93	0.46	64.39	-9.61	74.00	150	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

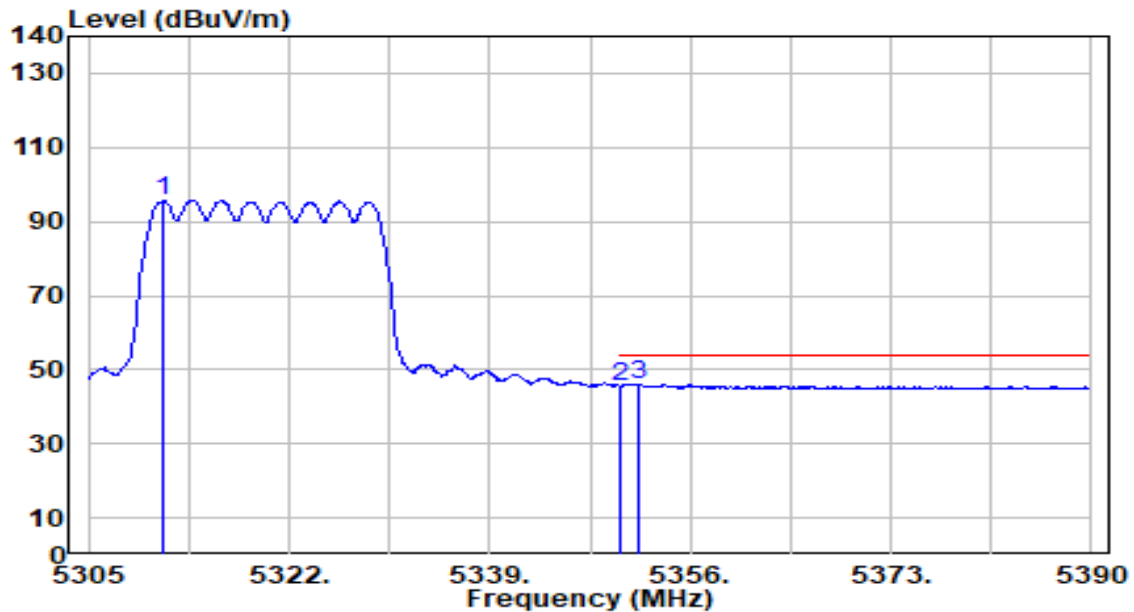


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.290	95.20	0.53	95.74	N/A	N/A	150	18	Average
2	5350.000	45.07	0.47	45.54	-8.46	54.00	150	18	Average
3	* 5351.665	45.68	0.47	46.14	-7.86	54.00	150	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

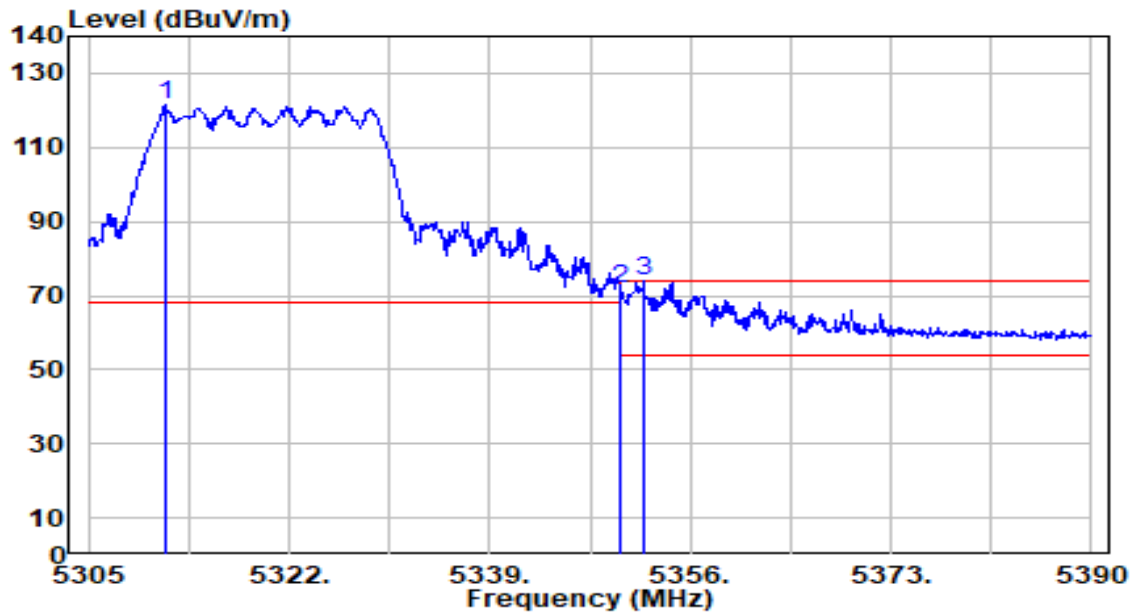


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.545	120.82	0.53	121.35	N/A	N/A	136	355	Peak
2	5350.000	71.35	0.47	71.82	-2.18	74.00	136	355	Peak
3	* 5352.090	73.29	0.47	73.76	-0.24	74.00	136	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

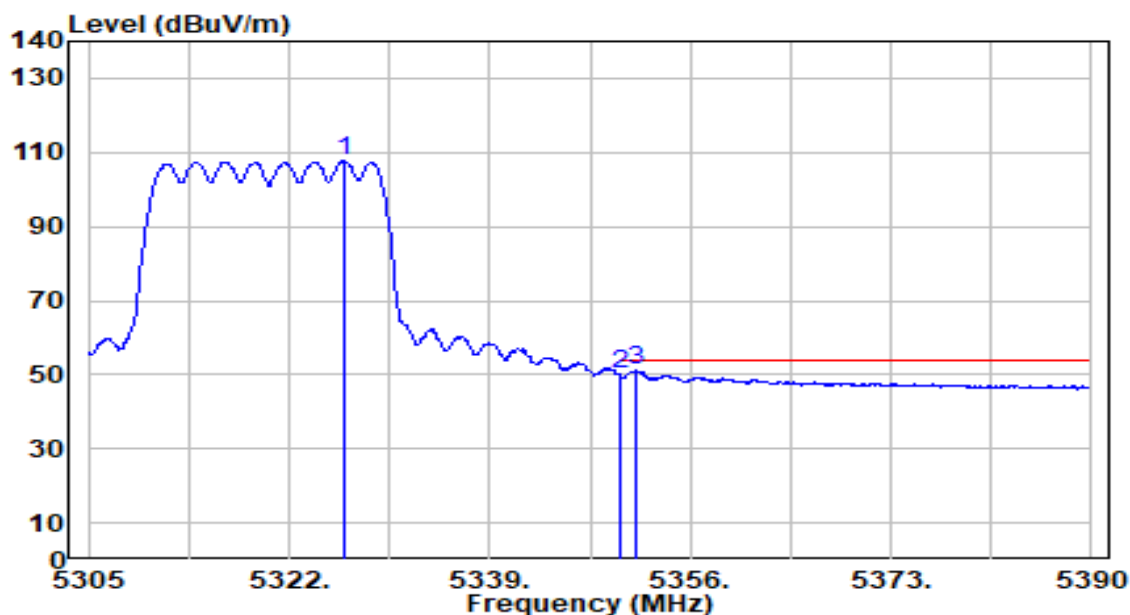


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.675	107.38	0.51	107.89	N/A	N/A	136	355	Average
2	5350.000	49.46	0.47	49.93	-4.07	54.00	136	355	Average
3	* 5351.495	50.61	0.47	51.08	-2.92	54.00	136	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

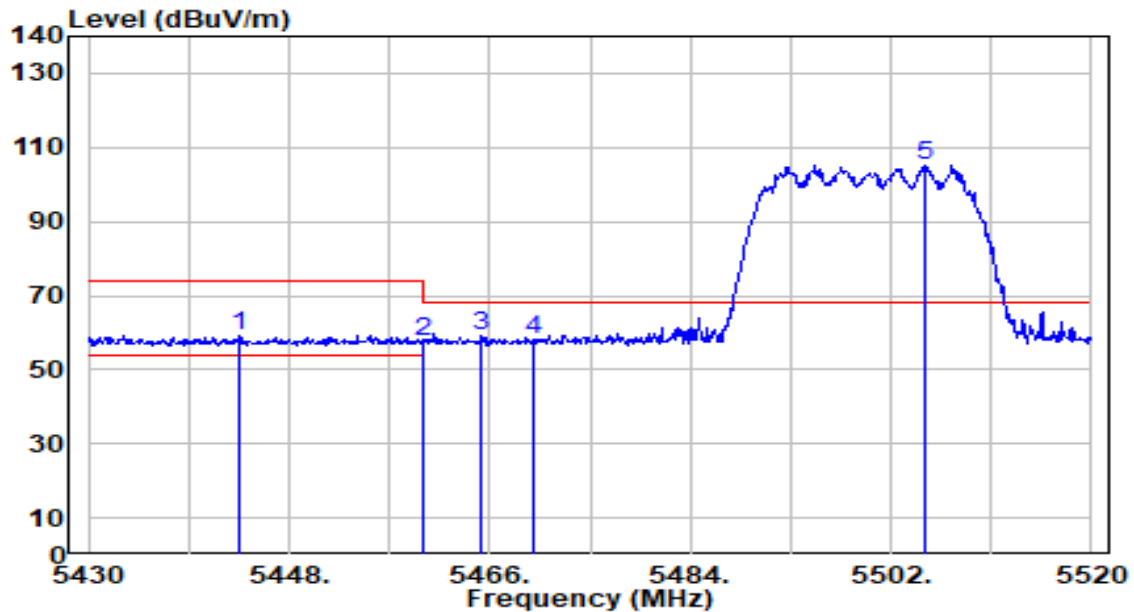


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5443.590	58.61	0.59	59.19	-14.81	74.00	100	2	Peak
2	5460.000	56.95	0.66	57.61	-16.39	74.00	100	2	Peak
3	* 5465.190	58.39	0.68	59.07	-9.13	68.20	100	2	Peak
4	5470.000	57.34	0.71	58.05	-10.15	68.20	100	2	Peak
5	5504.970	104.29	0.86	105.15	N/A	N/A	100	2	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

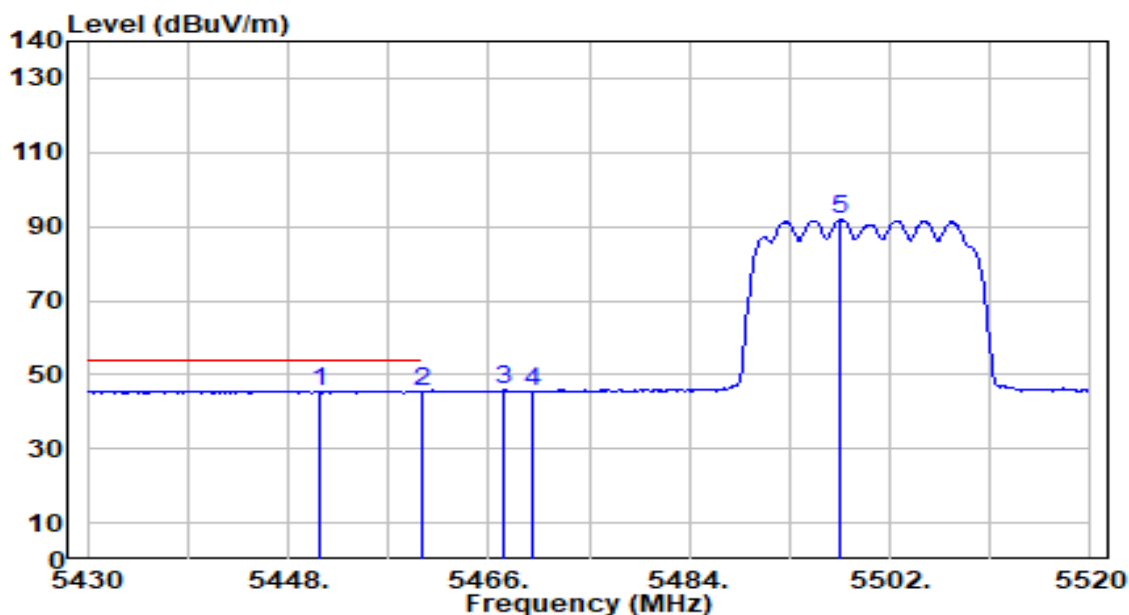


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.790	45.04	0.62	45.66	-8.34	54.00	100	2	Average
2		5460.000	44.95	0.66	45.61	-8.39	54.00	100	2	Average
3		5467.440	45.15	0.69	45.85	N/A	N/A	100	2	Average
4		5470.000	44.73	0.71	45.43	N/A	N/A	100	2	Average
5		5497.500	91.13	0.83	91.96	N/A	N/A	100	2	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

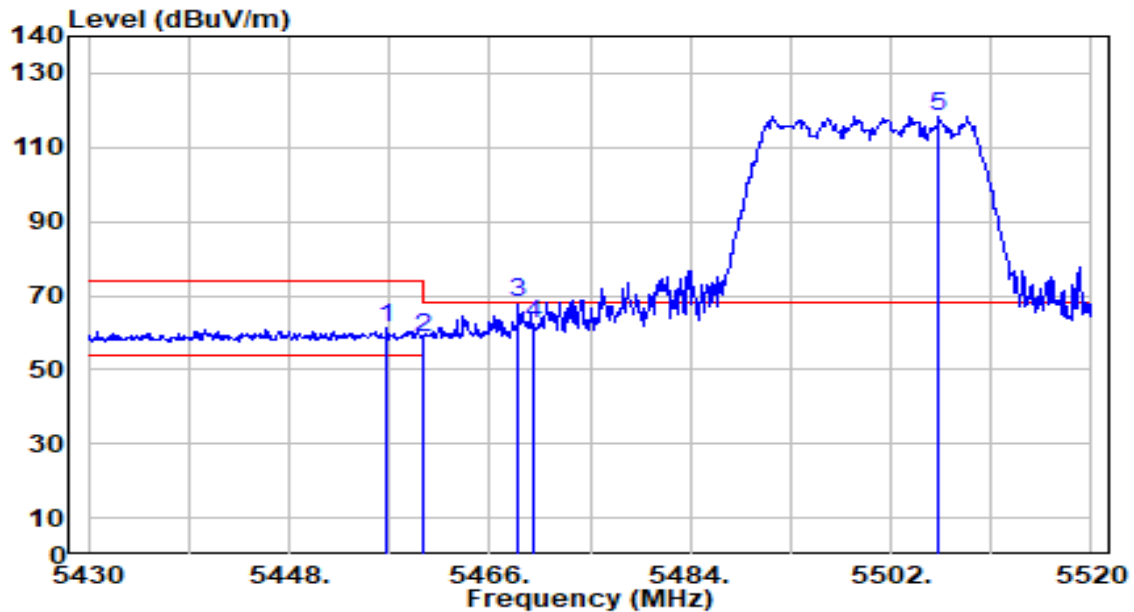


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.730	60.75	0.65	61.40	-12.60	74.00	160	360	Peak
2	5460.000	57.85	0.66	58.51	-15.49	74.00	160	360	Peak
3	* 5468.610	67.26	0.70	67.96	-0.24	68.20	160	360	Peak
4	5470.000	61.42	0.71	62.13	-6.07	68.20	160	360	Peak
5	5506.230	117.45	0.87	118.32	N/A	N/A	160	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

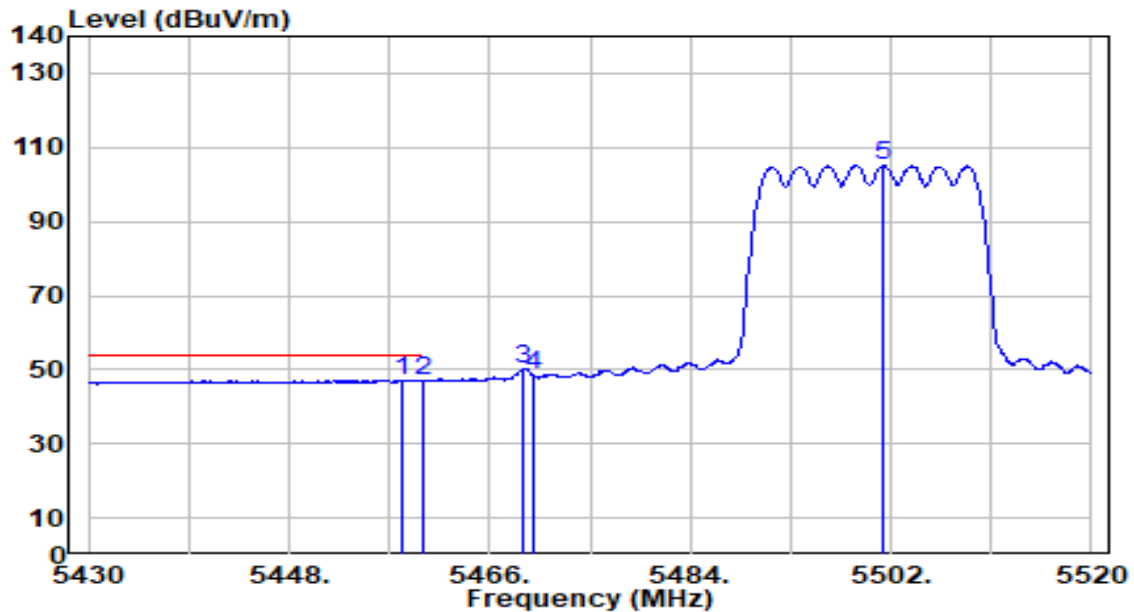


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.260	46.45	0.65	47.11	-6.89	54.00	160	360	Average
2		5460.000	46.19	0.66	46.85	-7.15	54.00	160	360	Average
3		5469.060	49.75	0.70	50.45	N/A	N/A	160	360	Average
4		5470.000	47.80	0.71	48.51	N/A	N/A	160	360	Average
5		5501.280	104.27	0.85	105.12	N/A	N/A	160	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

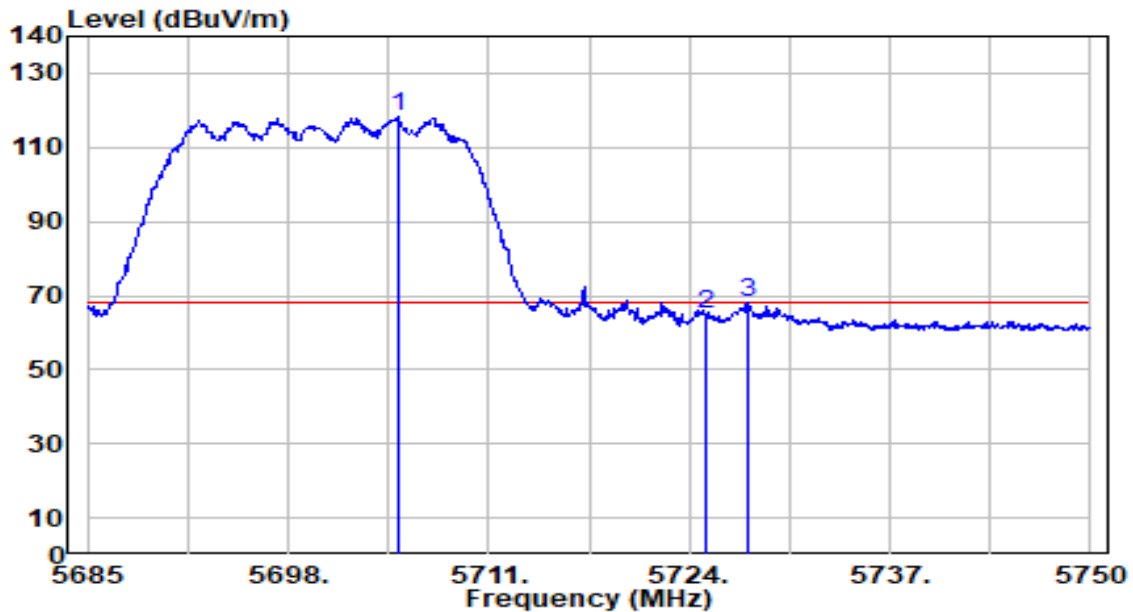


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.150	116.39	1.80	118.19	N/A	N/A	160	346	Peak
2	5725.000	63.06	1.89	64.96	-3.24	68.20	160	346	Peak
3	* 5727.770	66.10	1.91	68.00	-0.20	68.20	160	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

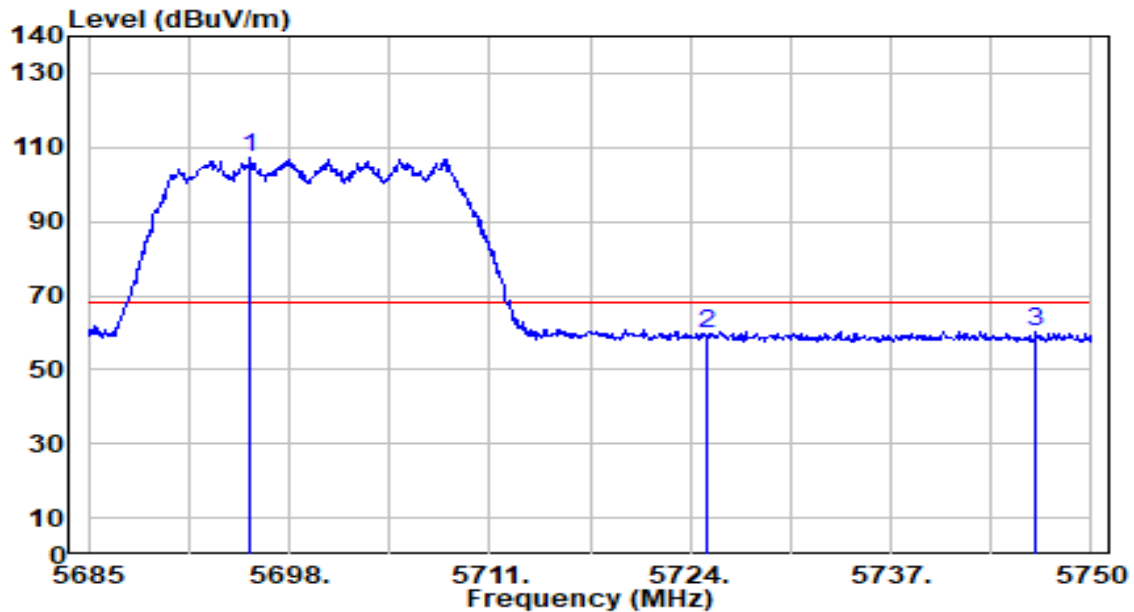


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.530	105.50	1.76	107.26	N/A	N/A	100	354	Peak
2	5725.000	57.79	1.89	59.68	-8.52	68.20	100	354	Peak
3	* 5746.425	58.42	1.99	60.42	-7.78	68.20	100	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

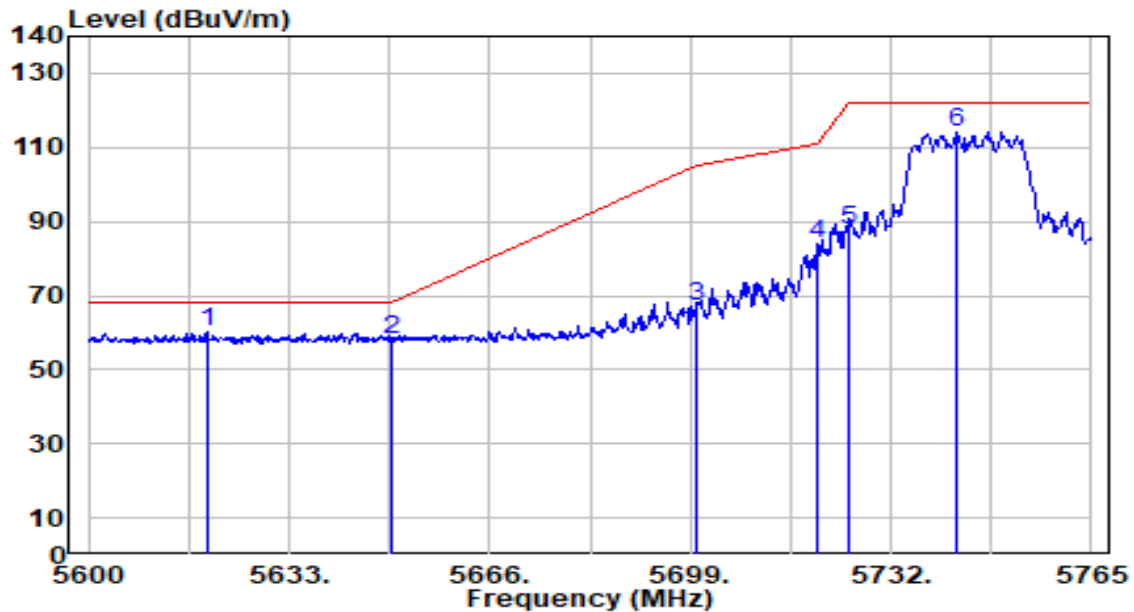


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5619.470	58.91	1.40	60.31	-7.89	68.20	130	356	Peak
2		5650.000	56.79	1.54	58.33	-9.87	68.20	130	356	Peak
3		5700.000	65.11	1.78	66.89	-38.31	105.20	130	356	Peak
4		5720.000	81.96	1.87	83.83	-26.97	110.80	130	356	Peak
5		5725.000	85.91	1.89	87.80	-34.40	122.20	130	356	Peak
6		5742.890	112.29	1.98	114.27	N/A	N/A	130	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

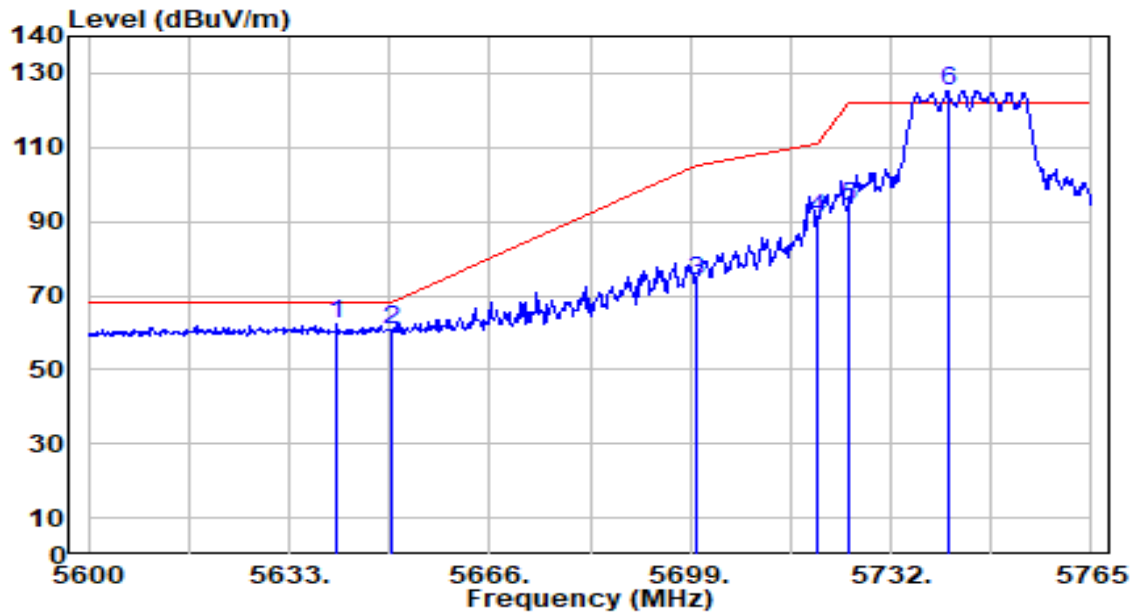


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5640.920	60.79	1.50	62.29	-5.91	68.20	200	1	Peak
2		5650.000	58.96	1.54	60.50	-7.70	68.20	200	1	Peak
3		5700.000	72.25	1.78	74.03	-31.17	105.20	200	1	Peak
4		5720.000	88.78	1.87	90.65	-20.15	110.80	200	1	Peak
5		5725.000	92.38	1.89	94.27	-27.93	122.20	200	1	Peak
6		5741.405	123.34	1.97	125.31	N/A	N/A	200	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

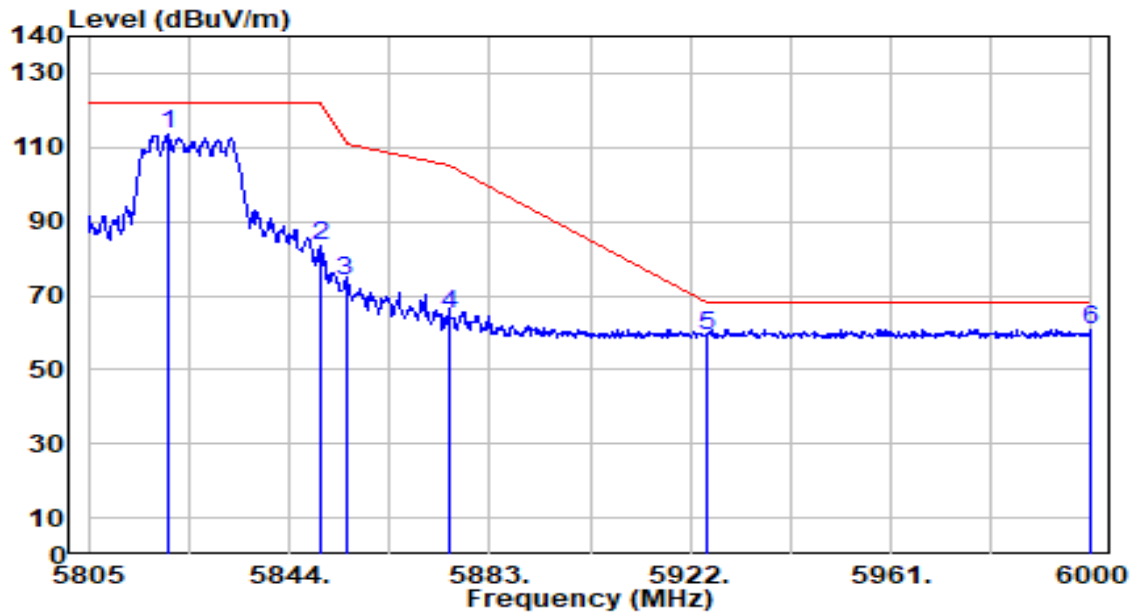


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.600	111.40	2.25	113.65	N/A	N/A	130	356	Peak
2	5850.000	80.98	2.25	83.23	-38.97	122.20	130	356	Peak
3	5855.000	71.55	2.25	73.80	-37.00	110.80	130	356	Peak
4	5875.000	62.86	2.26	65.12	-40.08	105.20	130	356	Peak
5	5925.000	56.81	2.27	59.08	-9.12	68.20	130	356	Peak
6	* 5999.610	58.69	2.28	60.97	-7.23	68.20	130	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

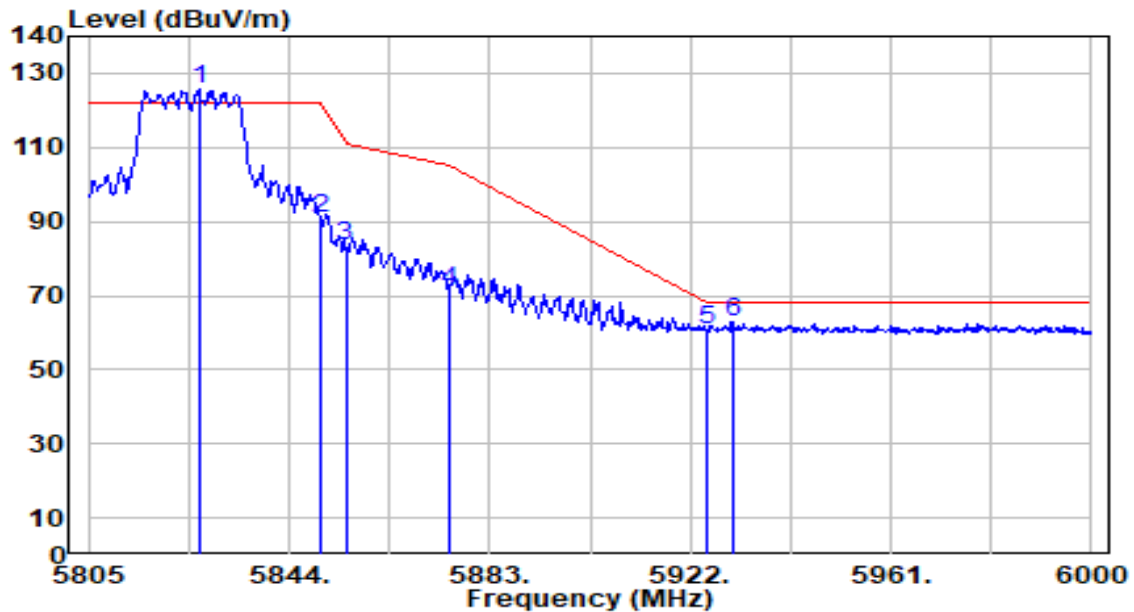


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	123.46	2.25	125.71	N/A	N/A	200	0	Peak
2	5850.000	88.71	2.25	90.96	-31.24	122.20	200	0	Peak
3	5855.000	81.19	2.25	83.44	-27.36	110.80	200	0	Peak
4	5875.000	69.07	2.26	71.33	-33.87	105.20	200	0	Peak
5	5925.000	58.34	2.27	60.61	-7.59	68.20	200	0	Peak
6	* 5930.190	60.41	2.27	62.68	-5.52	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

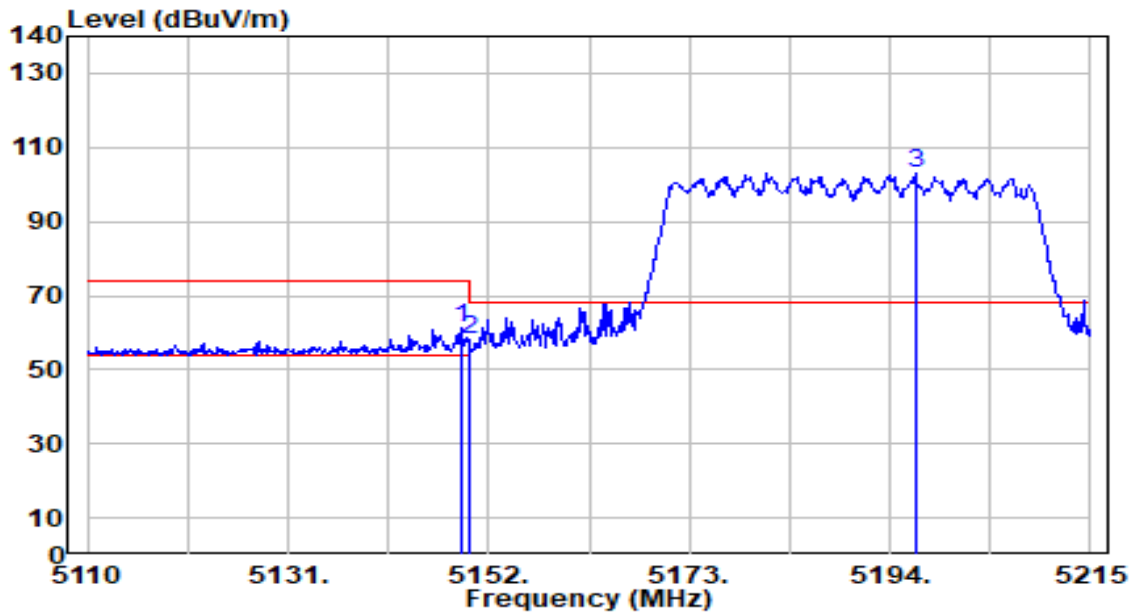


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	60.55	0.65	61.21	-12.79	74.00	150	18	Peak
2		5150.000	57.26	0.65	57.92	-16.08	74.00	150	18	Peak
3		5196.625	102.47	0.70	103.17	N/A	N/A	150	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

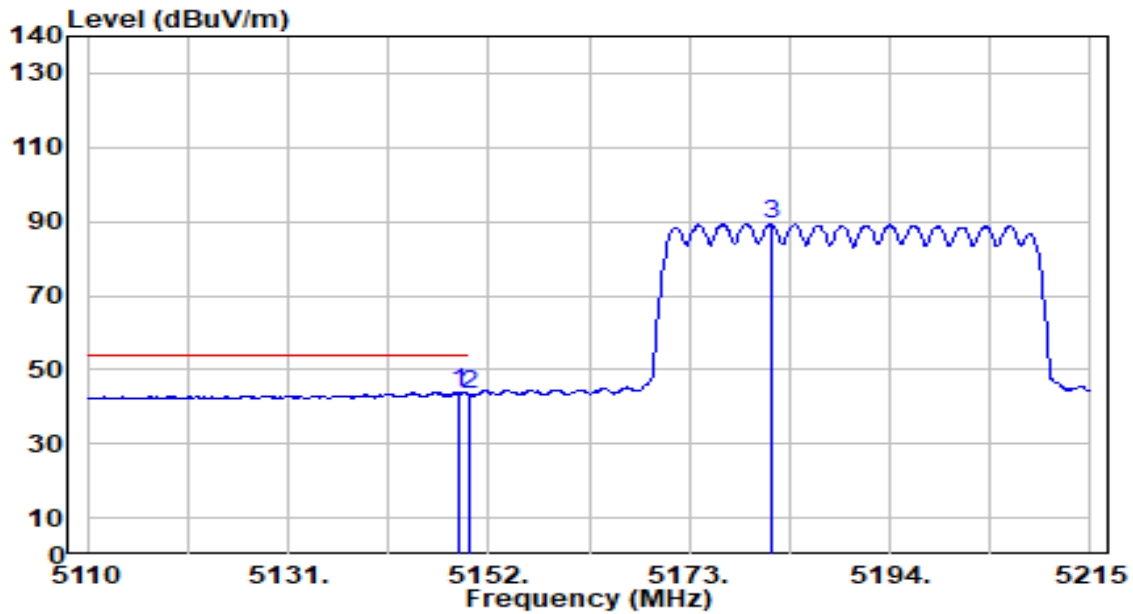


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.955	43.37	0.65	44.03	-9.97	54.00	150	18	Average
2		5150.000	42.82	0.65	43.47	-10.53	54.00	150	18	Average
3		5181.505	88.68	0.68	89.36	N/A	N/A	150	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

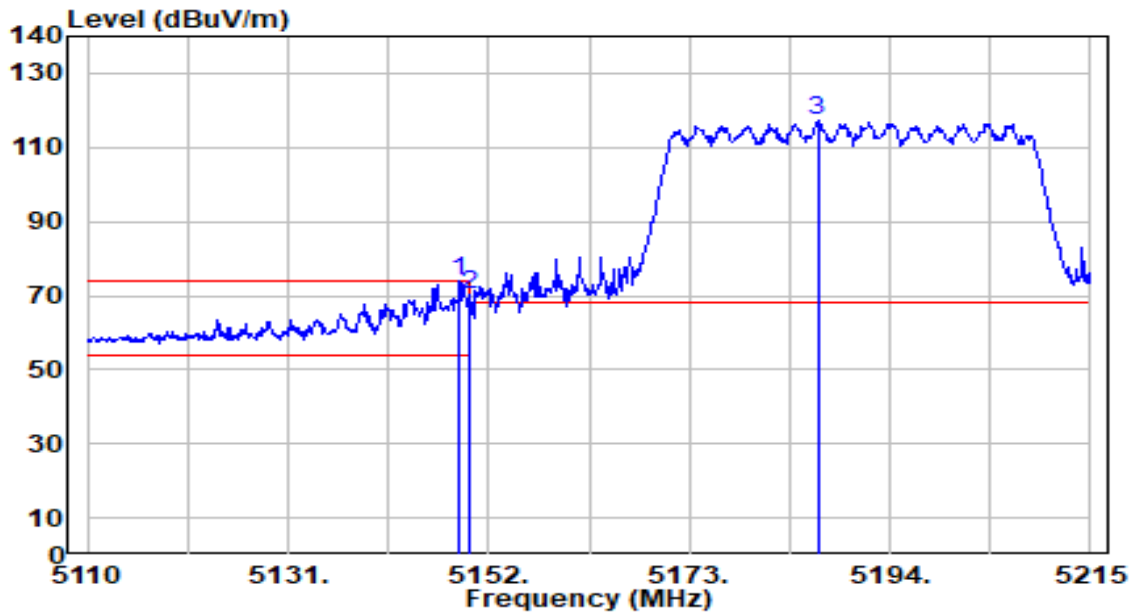


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.955	73.19	0.65	73.84	-0.16	74.00	136	359	Peak
2		5150.000	69.44	0.65	70.09	-3.91	74.00	136	359	Peak
3		5186.440	116.34	0.69	117.03	N/A	N/A	136	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

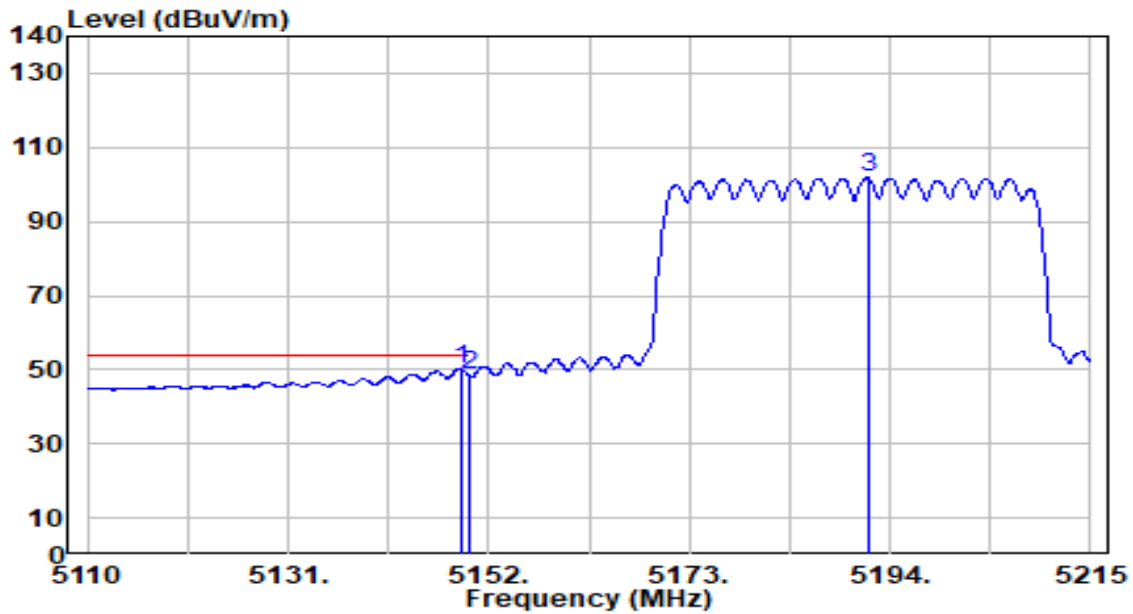


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	49.72	0.65	50.37	-3.63	54.00	136	359	Average
2		5150.000	47.69	0.65	48.34	-5.66	54.00	136	359	Average
3		5191.690	101.12	0.69	101.81	N/A	N/A	136	359	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – PreampIifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

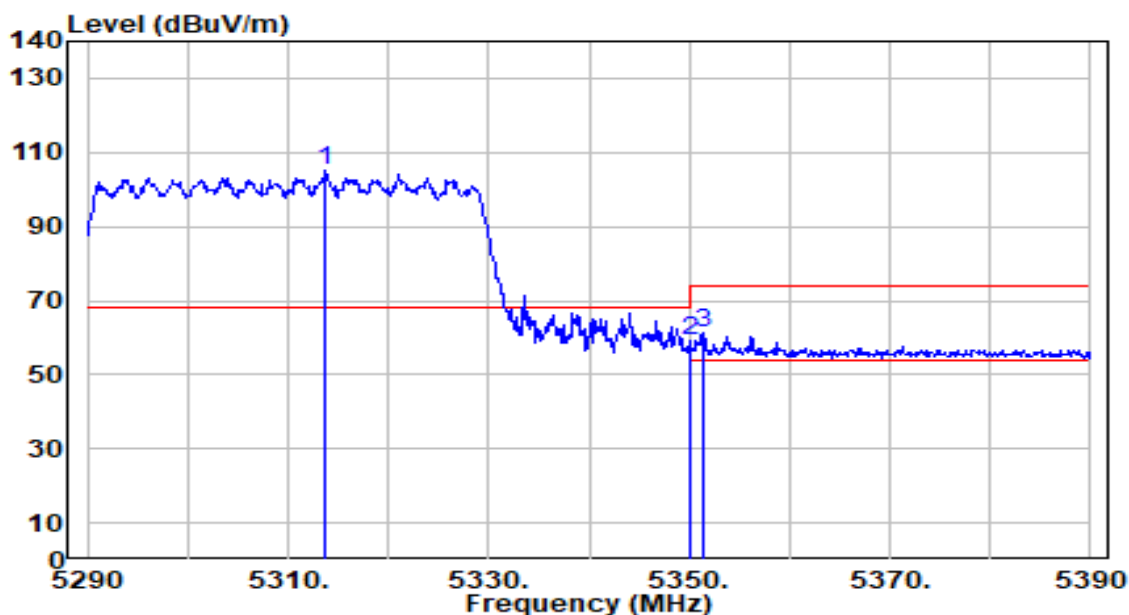


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.700	104.55	0.53	105.07	N/A	N/A	150	343	Peak
2	5350.000	58.77	0.47	59.25	-14.75	74.00	150	343	Peak
3	* 5351.300	60.67	0.47	61.14	-12.86	74.00	150	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

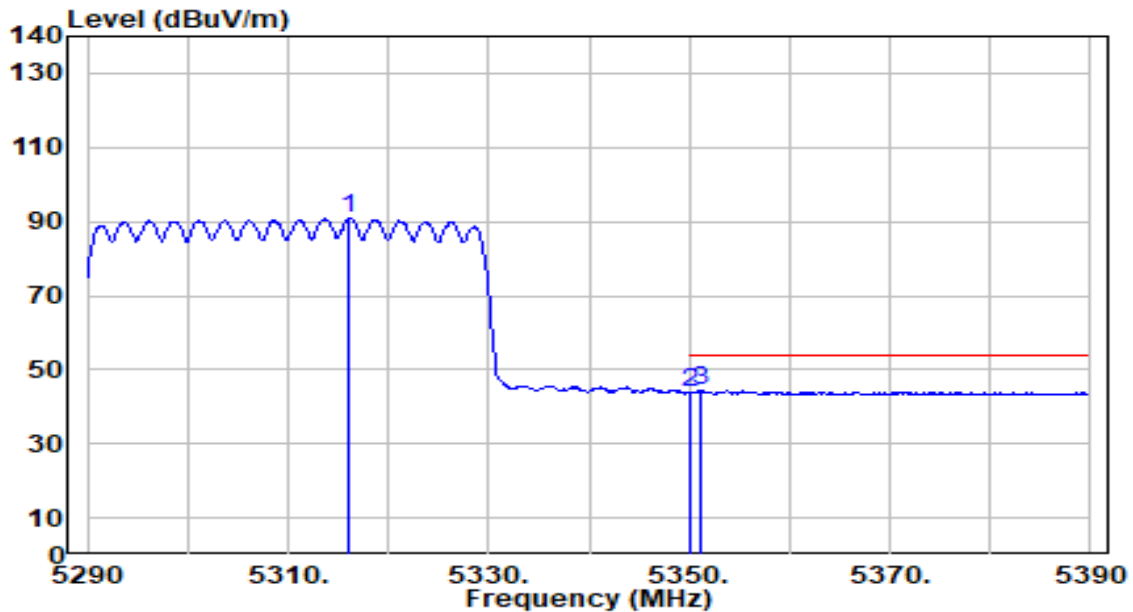


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.000	90.38	0.52	90.91	N/A	N/A	150	343	Average
2	5350.000	43.45	0.47	43.92	-10.08	54.00	150	343	Average
3	* 5351.200	43.76	0.47	44.23	-9.77	54.00	150	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

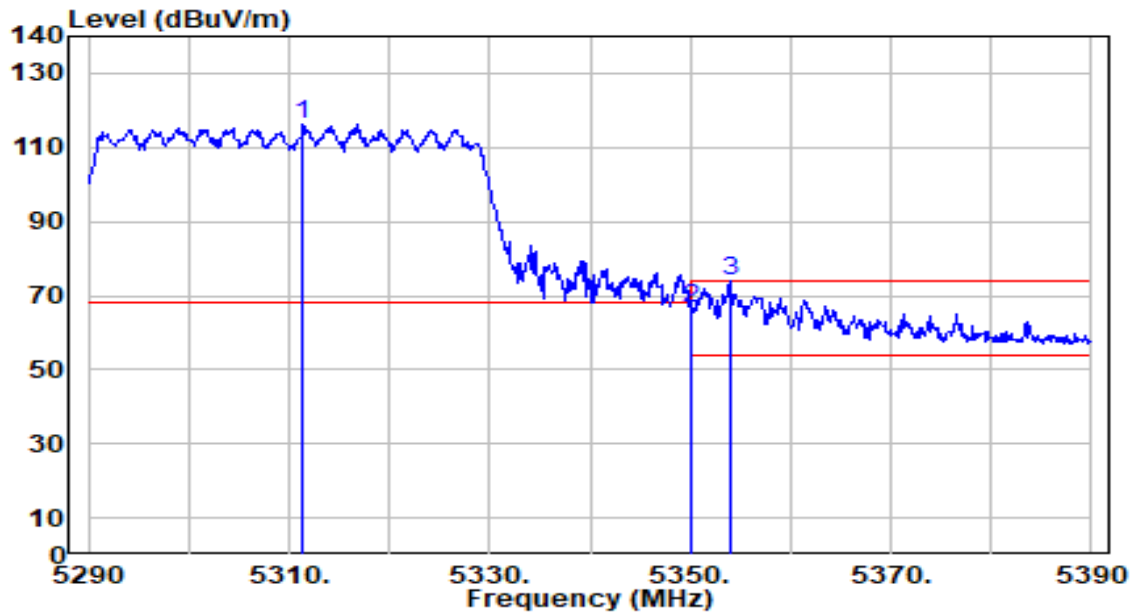


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.400	115.83	0.53	116.36	N/A	N/A	136	34	Peak
2	5350.000	66.33	0.47	66.80	-7.20	74.00	136	34	Peak
3	* 5354.000	73.41	0.46	73.88	-0.12	74.00	136	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

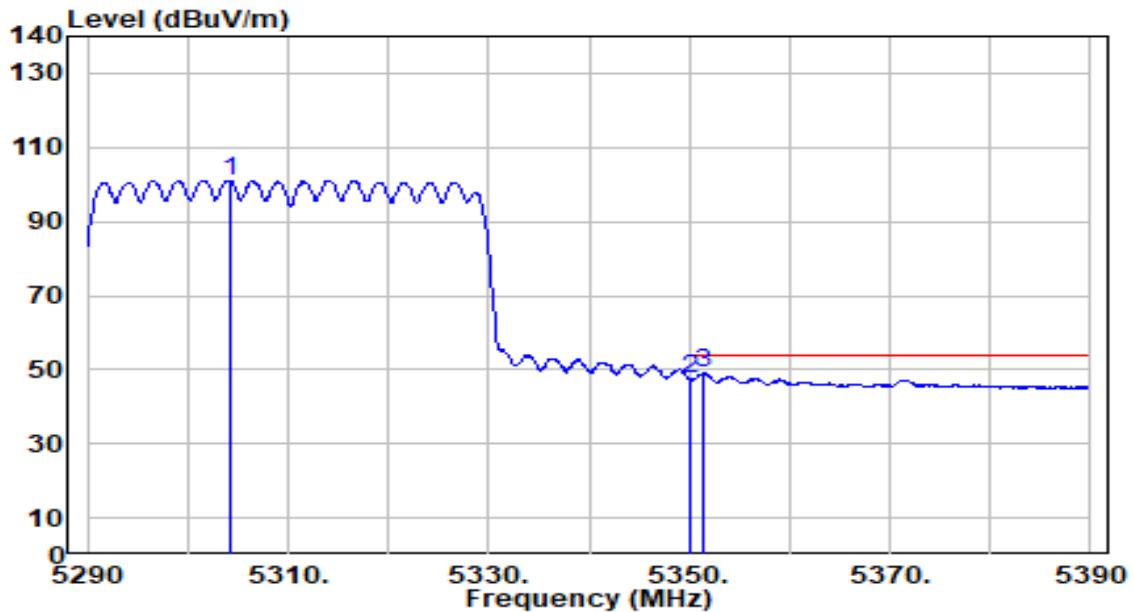


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.200	100.62	0.54	101.16	N/A	N/A	136	34	Average
2	5350.000	47.33	0.47	47.80	-6.20	54.00	136	34	Average
3	* 5351.500	48.52	0.47	48.98	-5.02	54.00	136	34	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

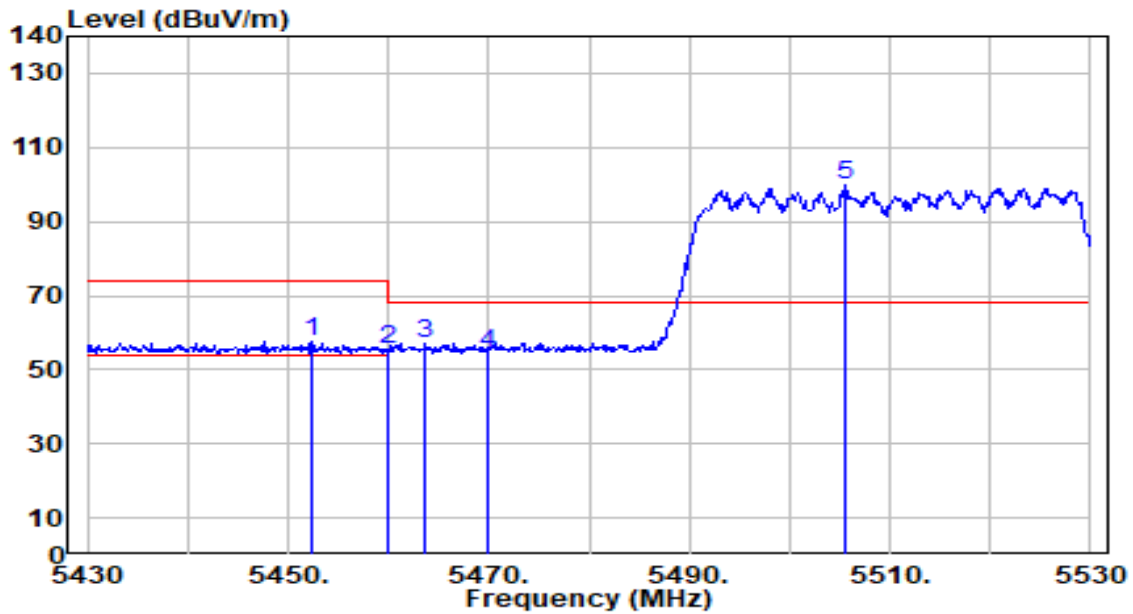


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.300	56.76	0.63	57.38	-16.62	74.00	100	352	Peak
2	5460.000	54.79	0.66	55.45	-18.55	74.00	100	352	Peak
3	* 5463.600	56.23	0.68	56.90	-11.30	68.20	100	352	Peak
4	5470.000	53.95	0.71	54.66	-13.54	68.20	100	352	Peak
5	5505.600	99.18	0.87	100.04	N/A	N/A	100	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

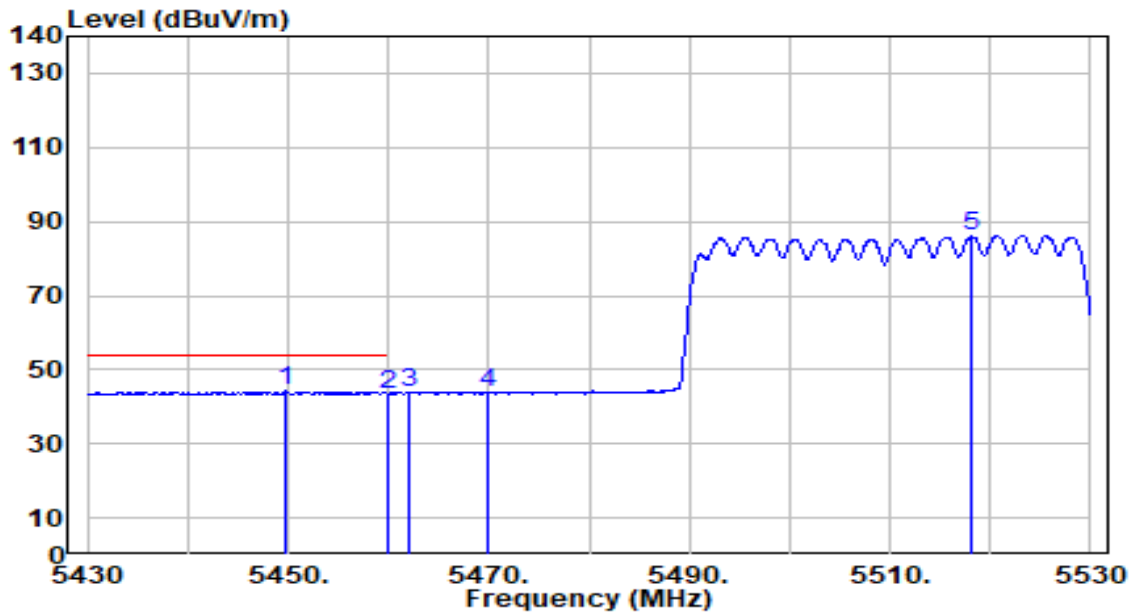


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.800	43.51	0.62	44.12	-9.88	54.00	100	352	Average
2		5460.000	42.74	0.66	43.40	-10.60	54.00	100	352	Average
3		5462.000	43.32	0.67	43.99	N/A	N/A	100	352	Average
4		5470.000	43.34	0.71	44.05	N/A	N/A	100	352	Average
5		5518.200	85.13	0.93	86.06	N/A	N/A	100	352	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

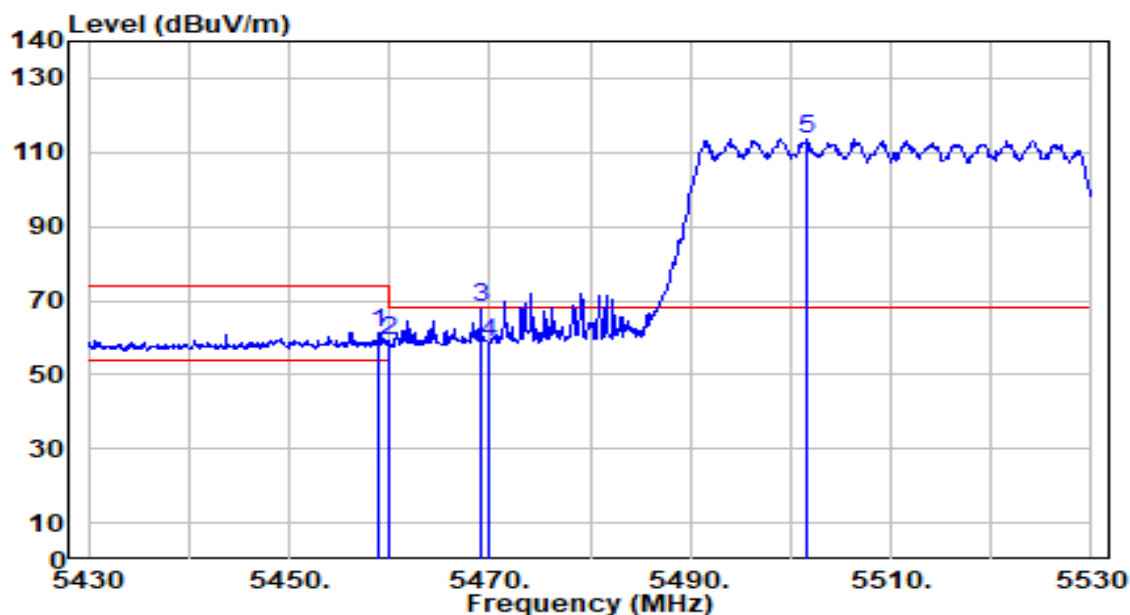


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.000	60.73	0.66	61.39	-12.61	74.00	160	35	Peak
2	5460.000	58.39	0.66	59.05	-14.95	74.00	160	35	Peak
3	* 5469.100	67.32	0.70	68.02	-0.18	68.20	160	35	Peak
4	5470.000	57.75	0.71	58.46	-9.74	68.20	160	35	Peak
5	5501.600	112.99	0.85	113.84	N/A	N/A	160	35	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

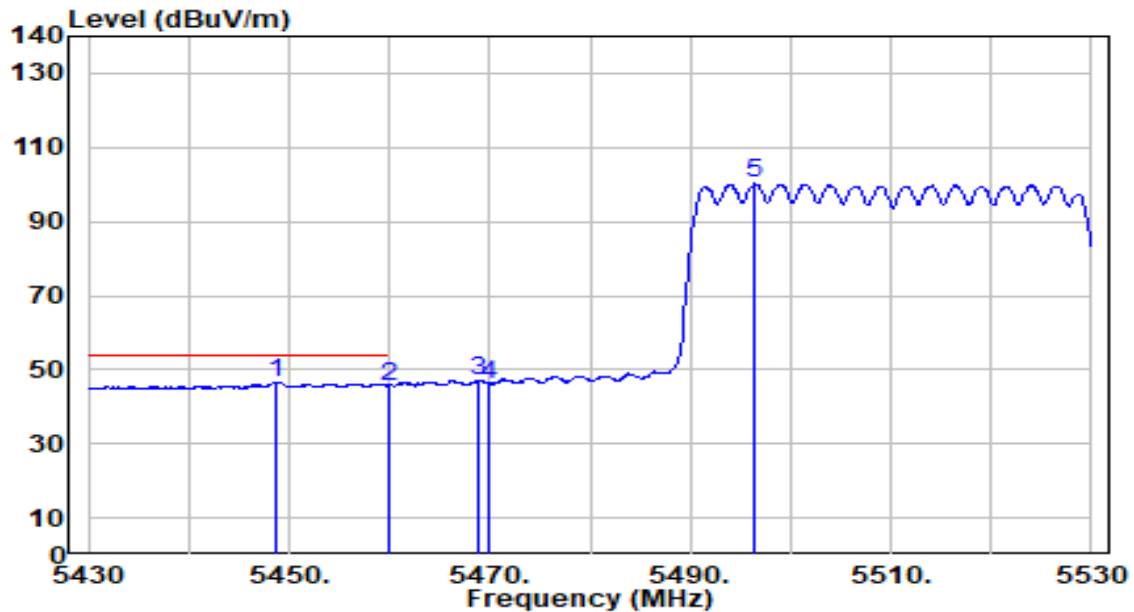


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.800	46.11	0.61	46.72	-7.28	54.00	160	35	Average
2		5460.000	45.03	0.66	45.69	-8.31	54.00	160	35	Average
3		5468.800	46.39	0.70	47.09	N/A	N/A	160	35	Average
4		5470.000	45.49	0.71	46.20	N/A	N/A	160	35	Average
5		5496.400	99.29	0.82	100.12	N/A	N/A	160	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 81_ANT 0+1	Test Voltage	AC 120V/60Hz

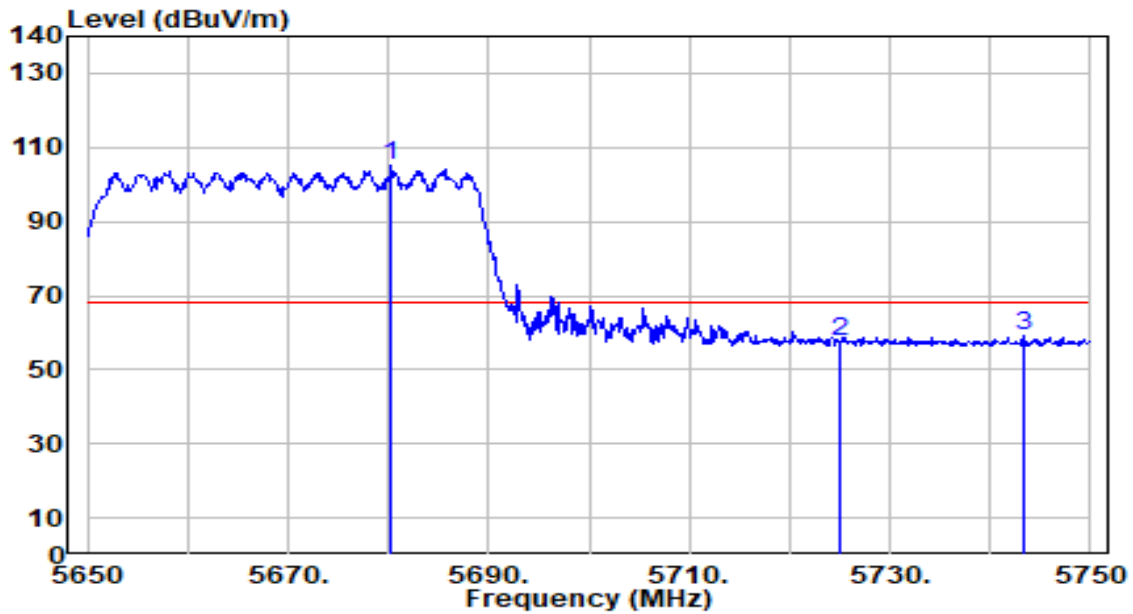


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5680.300	103.38	1.68	105.06	N/A	N/A	100	353	Peak
2	5725.000	55.94	1.89	57.84	-10.36	68.20	100	353	Peak
3	* 5743.400	57.23	1.98	59.21	-8.99	68.20	100	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 81_ANT 0+1	Test Voltage	AC 120V/60Hz

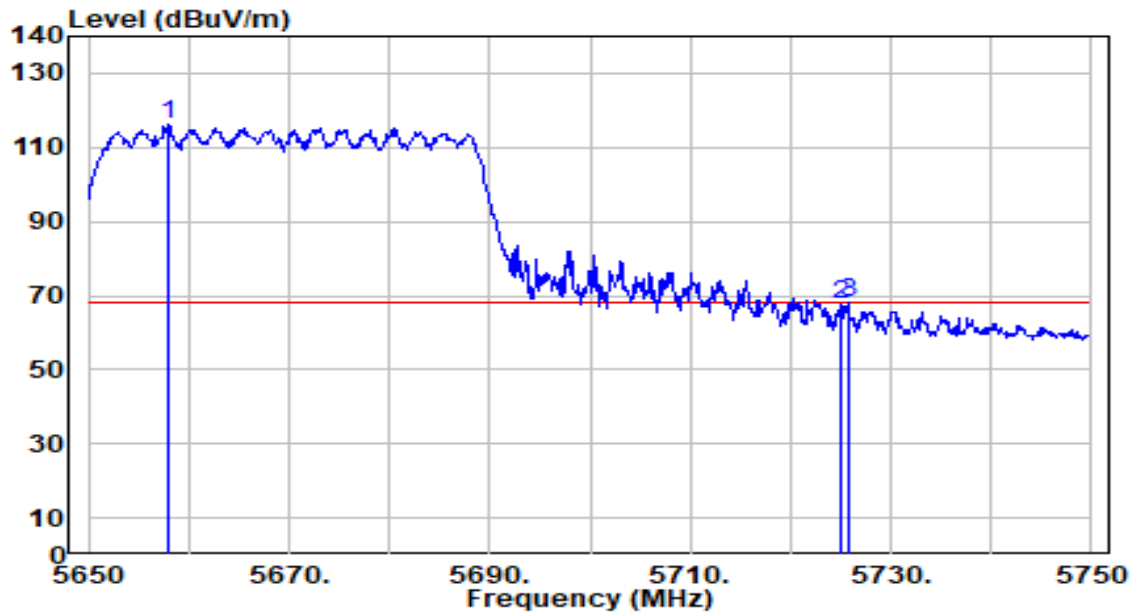


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5657.900	114.41	1.58	115.99	N/A	N/A	160	12	Peak
2	5725.000	65.77	1.89	67.67	-0.53	68.20	160	12	Peak
3	* 5725.800	66.14	1.90	68.04	-0.16	68.20	160	12	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

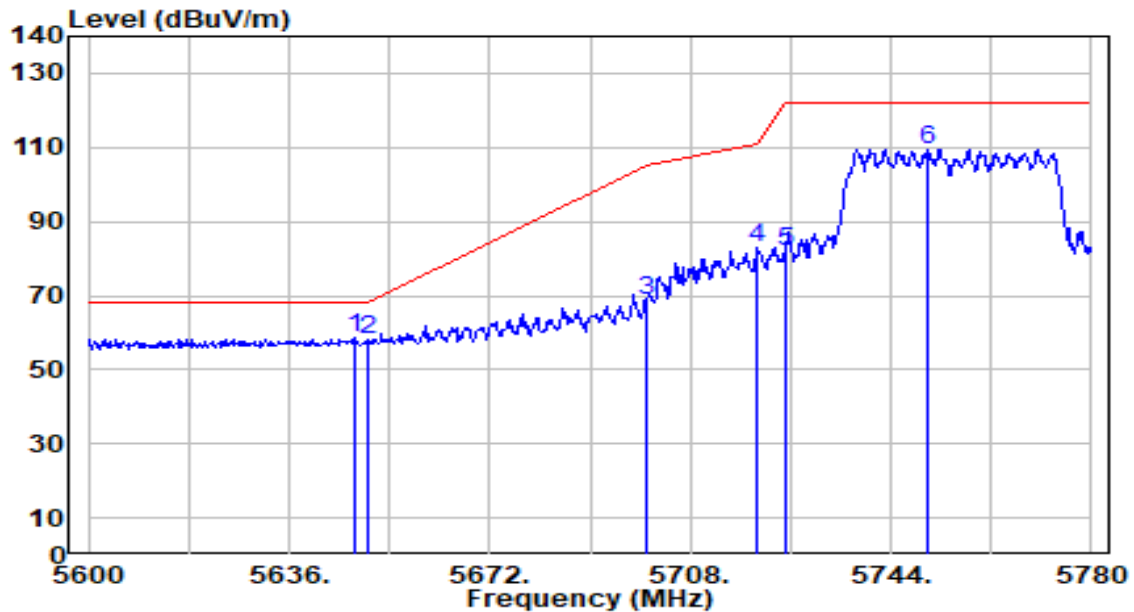


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.880	56.85	1.53	58.39	-9.81	68.20	130	356	Peak
2		5650.000	56.67	1.54	58.21	-9.99	68.20	130	356	Peak
3		5700.000	66.99	1.78	68.77	-36.43	105.20	130	356	Peak
4		5720.000	81.34	1.87	83.21	-27.59	110.80	130	356	Peak
5		5725.000	80.25	1.89	82.15	-40.05	122.20	130	356	Peak
6		5750.480	107.58	2.01	109.60	N/A	N/A	130	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

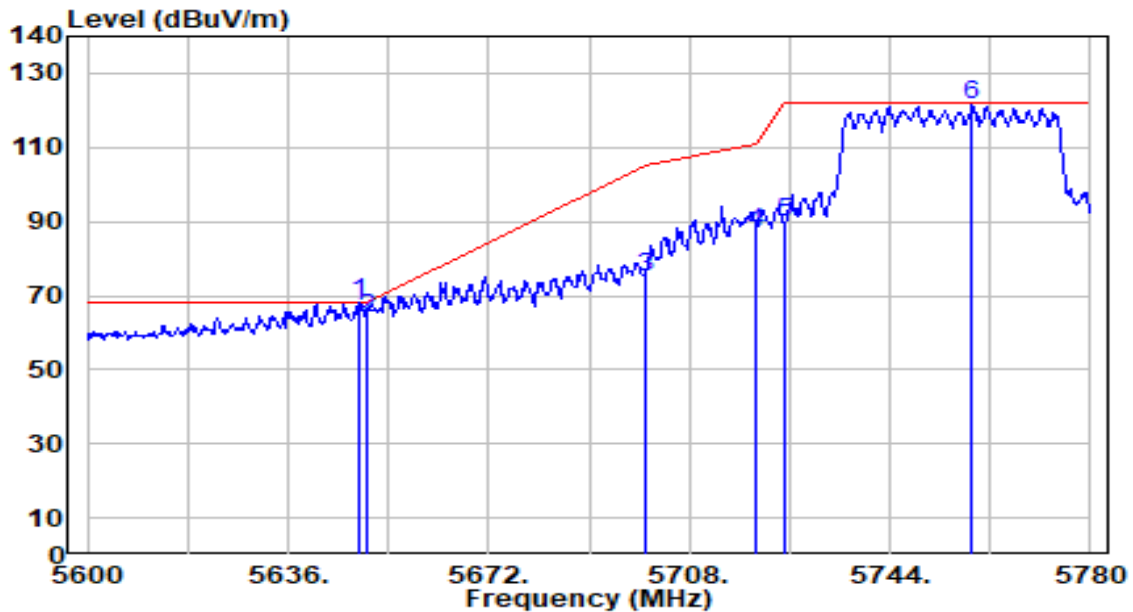


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.600	66.55	1.54	68.09	-0.11	68.20	200	360	Peak
2		5650.000	62.46	1.54	64.00	-4.20	68.20	200	360	Peak
3		5700.000	73.50	1.78	75.28	-29.92	105.20	200	360	Peak
4		5720.000	85.27	1.87	87.14	-23.66	110.80	200	360	Peak
5		5725.000	88.10	1.89	89.99	-32.21	122.20	200	360	Peak
6		5758.760	119.47	2.05	121.52	N/A	N/A	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

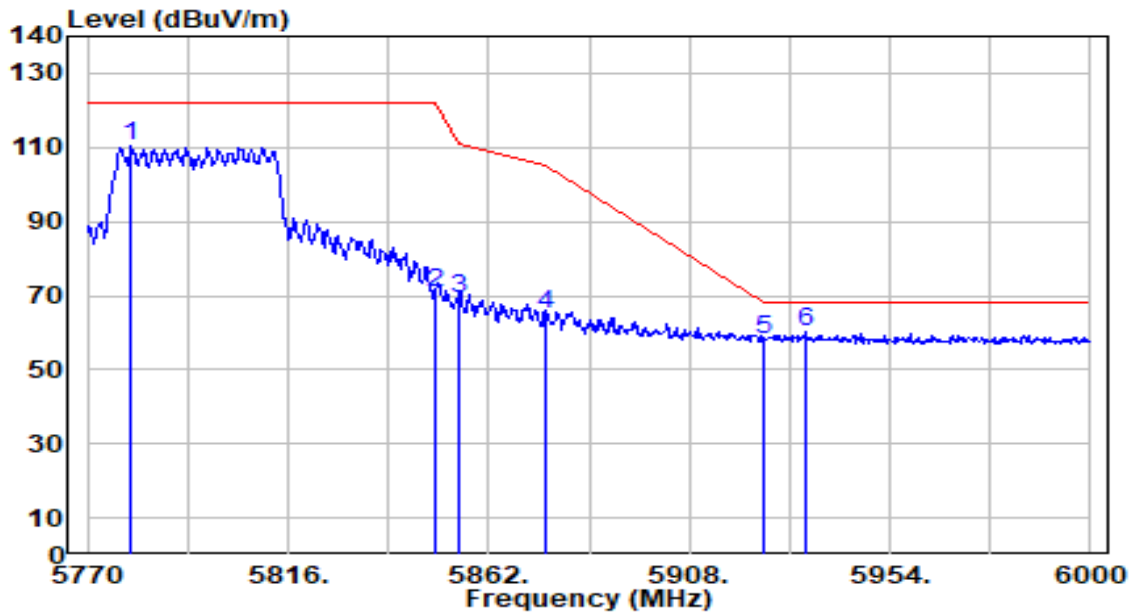


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5780.120	108.10	2.15	110.25	N/A	N/A	130	357	Peak
2	5850.000	68.34	2.25	70.59	-51.61	122.20	130	357	Peak
3	5855.000	67.16	2.25	69.42	-41.38	110.80	130	357	Peak
4	5875.000	62.67	2.26	64.93	-40.27	105.20	130	357	Peak
5	5925.000	55.90	2.27	58.17	-10.03	68.20	130	357	Peak
6	* 5934.450	57.86	2.27	60.13	-8.07	68.20	130	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

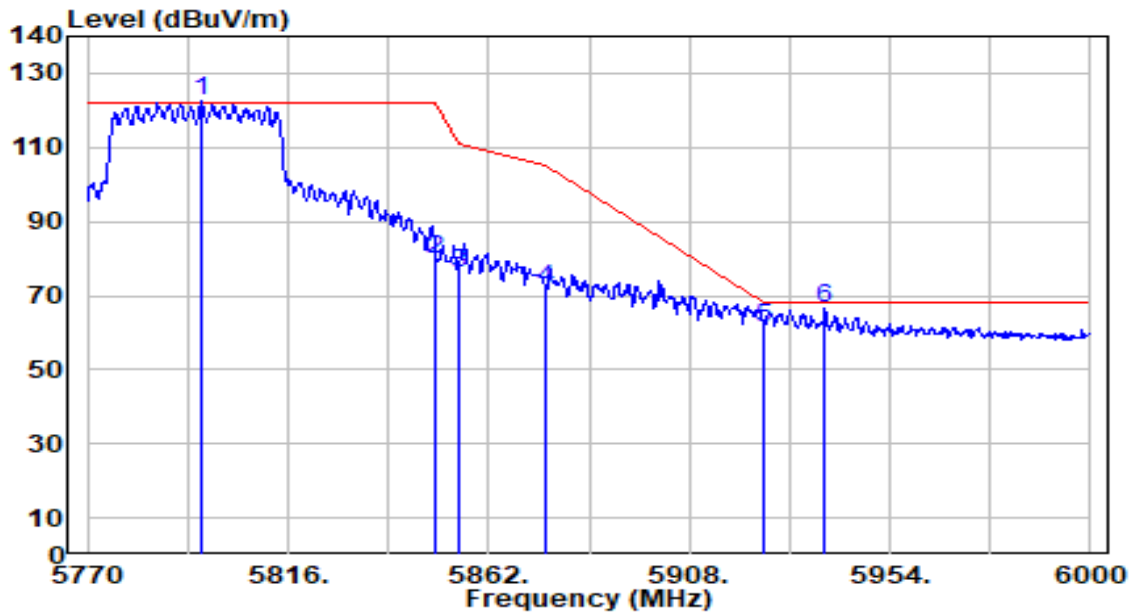


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5795.990	120.20	2.23	122.42	N/A	N/A	200	0	Peak
2	5850.000	77.41	2.25	79.67	-42.53	122.20	200	0	Peak
3	5855.000	73.96	2.25	76.22	-34.58	110.80	200	0	Peak
4	5875.000	69.35	2.26	71.61	-33.59	105.20	200	0	Peak
5	5925.000	58.92	2.27	61.19	-7.01	68.20	200	0	Peak
6	* 5939.050	64.06	2.27	66.33	-1.87	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

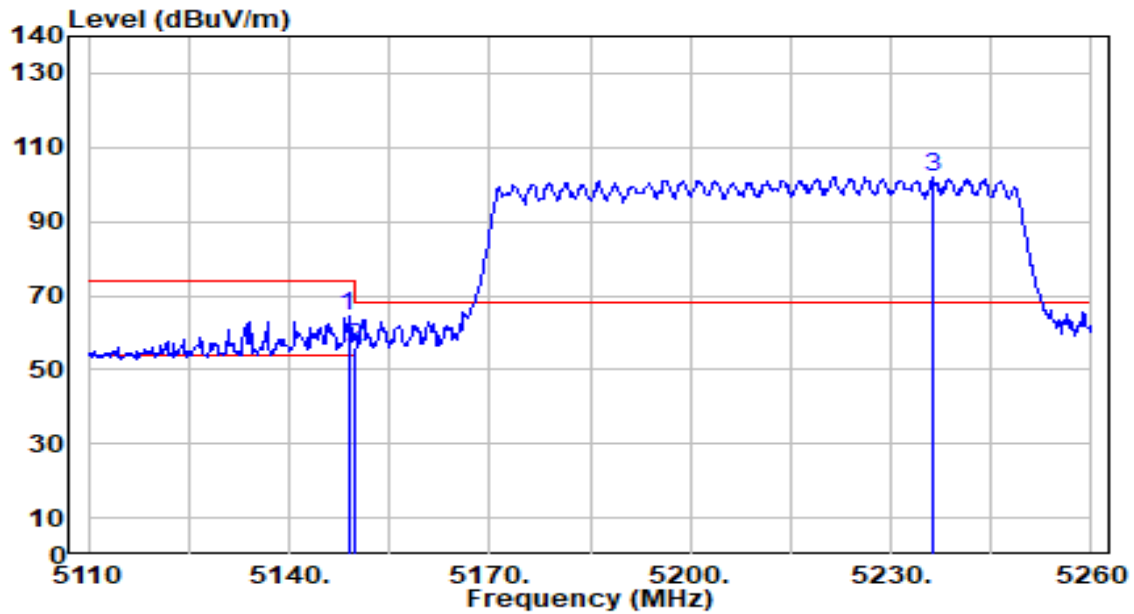


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	63.91	0.65	64.56	-9.44	74.00	150	344	Peak
2		5150.000	55.17	0.65	55.82	-18.18	74.00	150	344	Peak
3		5236.300	101.40	0.65	102.05	N/A	N/A	150	344	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

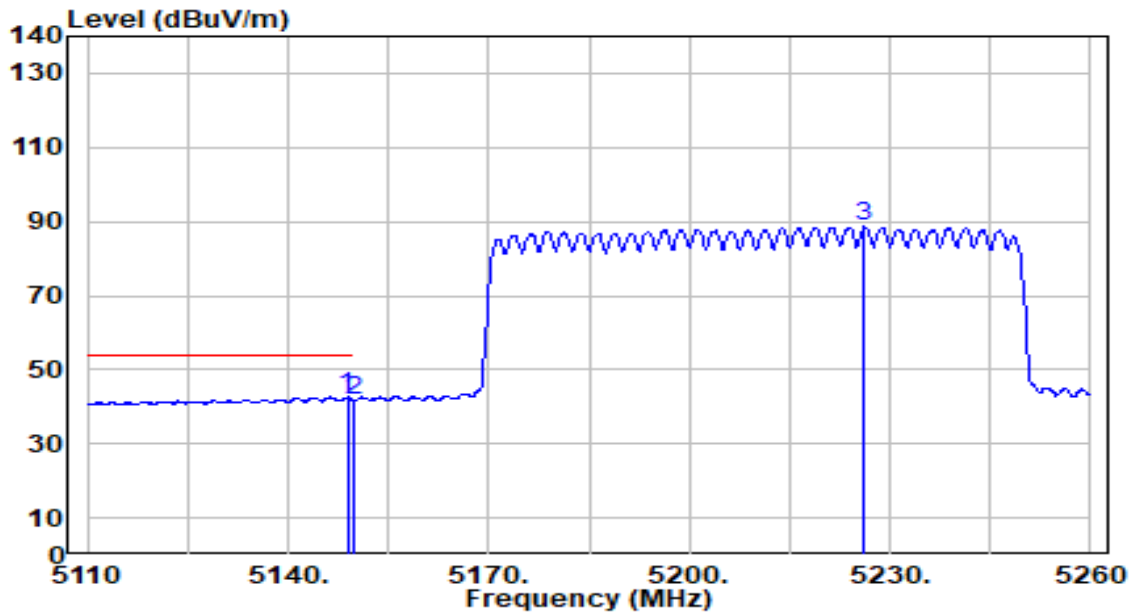


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	41.94	0.65	42.59	-11.41	54.00	150	344	Average
2		5150.000	40.86	0.65	41.51	-12.49	54.00	150	344	Average
3		5226.250	87.85	0.66	88.51	N/A	N/A	150	344	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

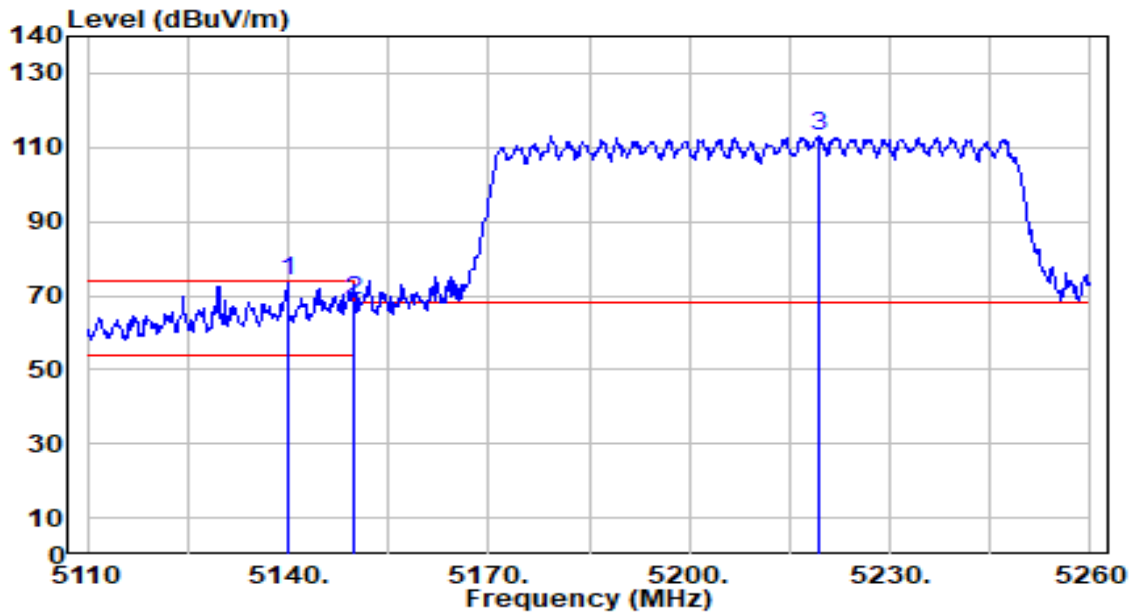


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.850	73.20	0.64	73.85	-0.15	74.00	136	32	Peak
2		5150.000	68.19	0.65	68.85	-5.15	74.00	136	32	Peak
3		5219.350	112.65	0.67	113.32	N/A	N/A	136	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

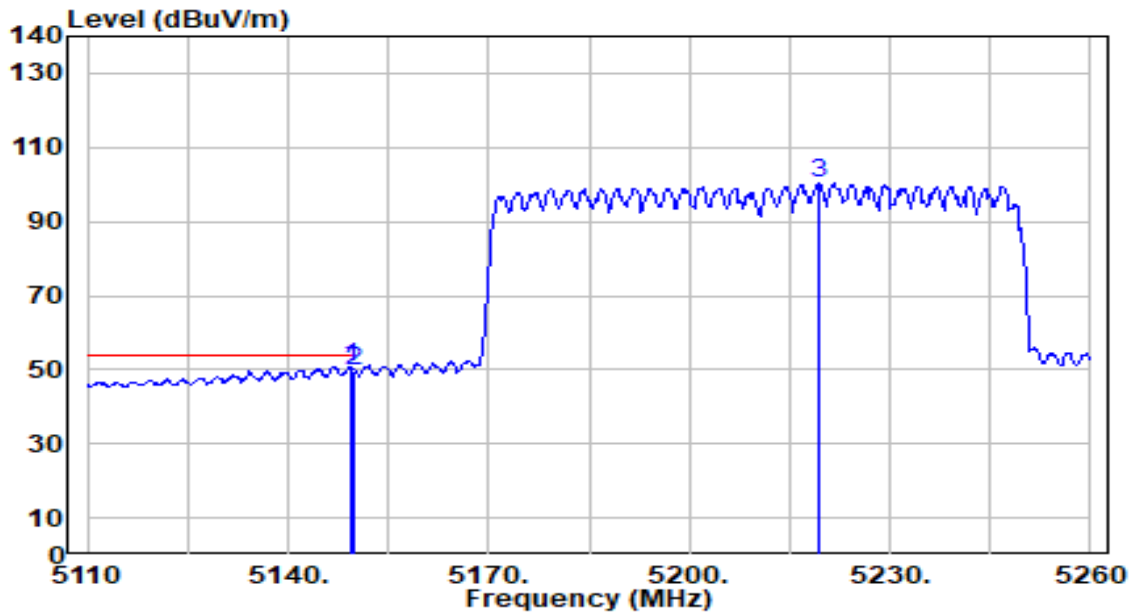


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.450	50.27	0.65	50.92	-3.08	54.00	136	32	Average
2		5150.000	49.08	0.65	49.73	-4.27	54.00	136	32	Average
3		5219.350	99.64	0.67	100.31	N/A	N/A	136	32	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

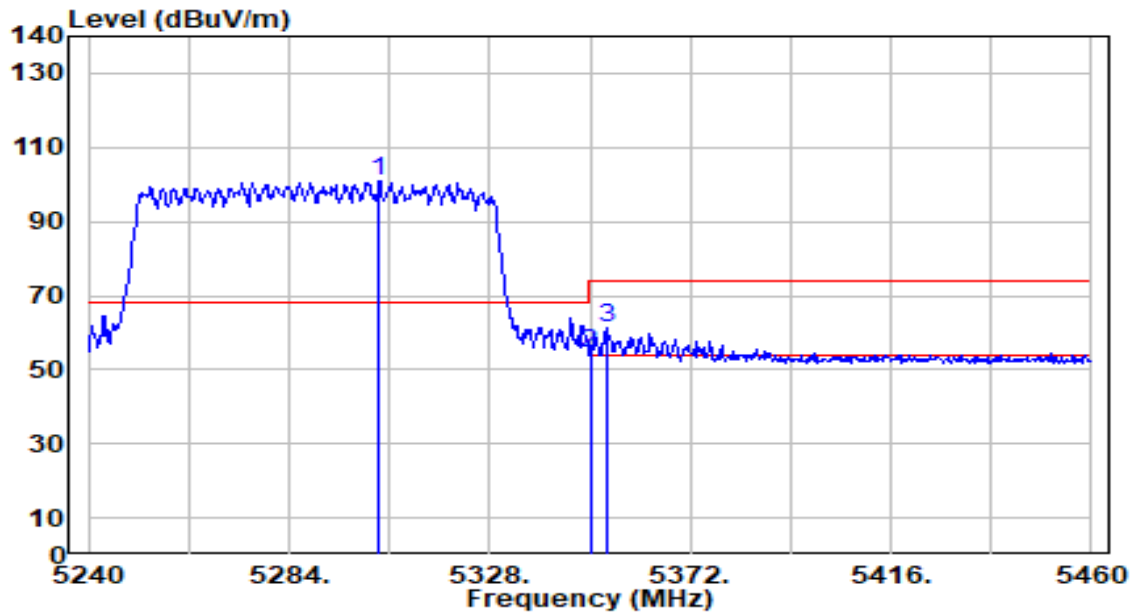


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5303.800	100.44	0.54	100.98	N/A	N/A	150	343	Peak
2	5350.000	53.90	0.47	54.37	-19.63	74.00	150	343	Peak
3	* 5353.520	60.68	0.47	61.14	-12.86	74.00	150	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

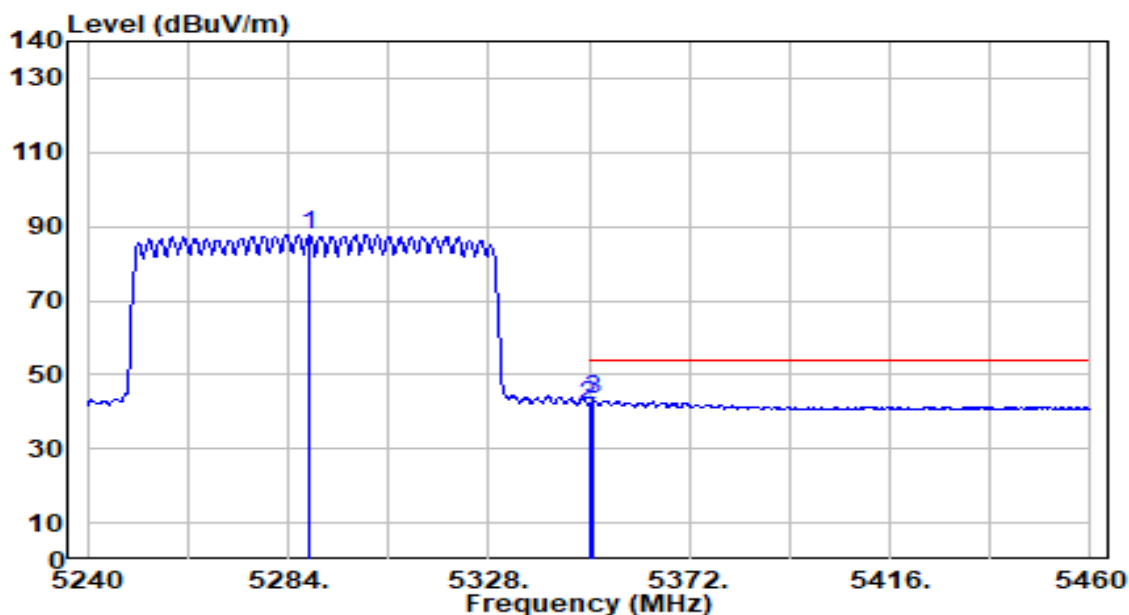


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5288.840	87.27	0.57	87.83	N/A	N/A	150	343	Average
2	5350.000	41.51	0.47	41.98	-12.02	54.00	150	343	Average
3	* 5350.880	42.82	0.47	43.29	-10.71	54.00	150	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

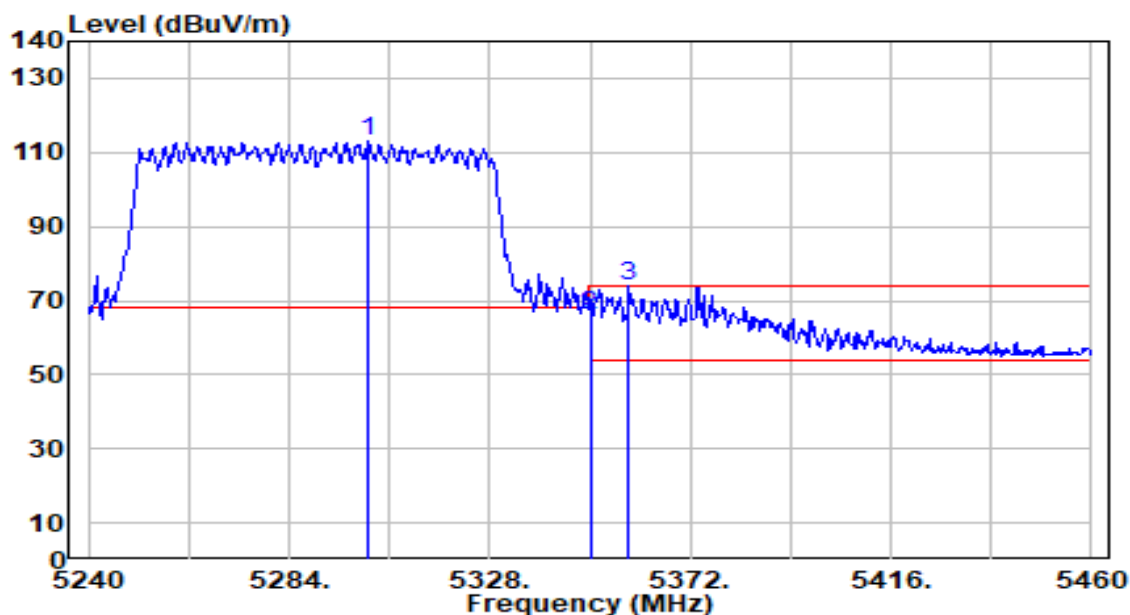


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.160	112.52	0.55	113.06	N/A	N/A	136	34	Peak
2	5350.000	65.32	0.47	65.80	-8.20	74.00	136	34	Peak
3	* 5358.580	73.41	0.46	73.86	-0.14	74.00	136	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

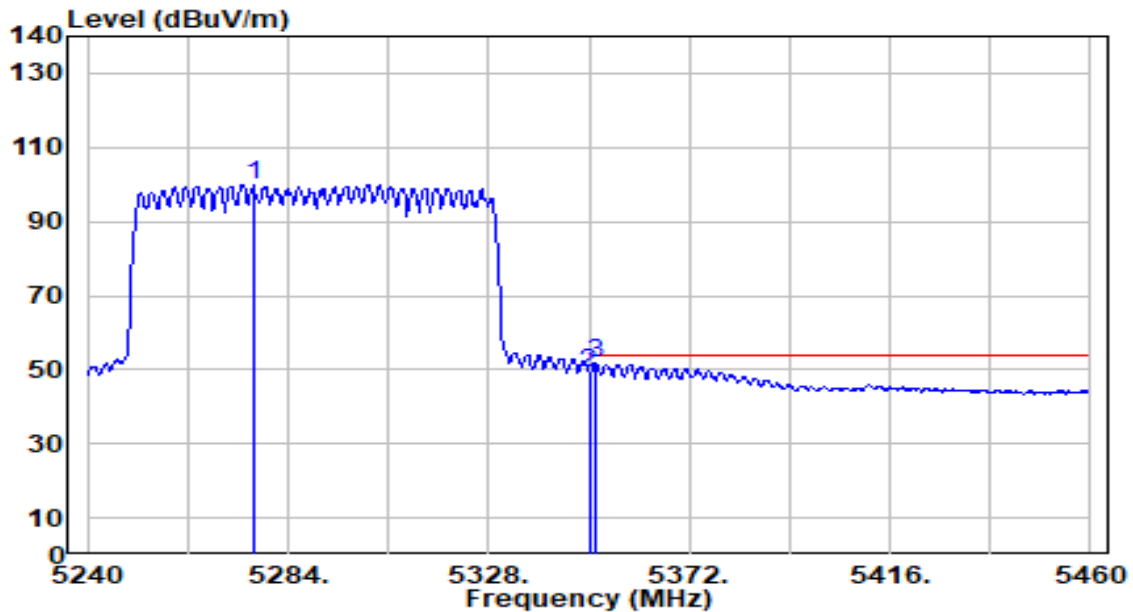


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5276.520	99.16	0.58	99.75	N/A	N/A	136	34	Average
2	5350.000	48.83	0.47	49.30	-4.70	54.00	136	34	Average
3	* 5351.540	51.38	0.47	51.85	-2.15	54.00	136	34	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

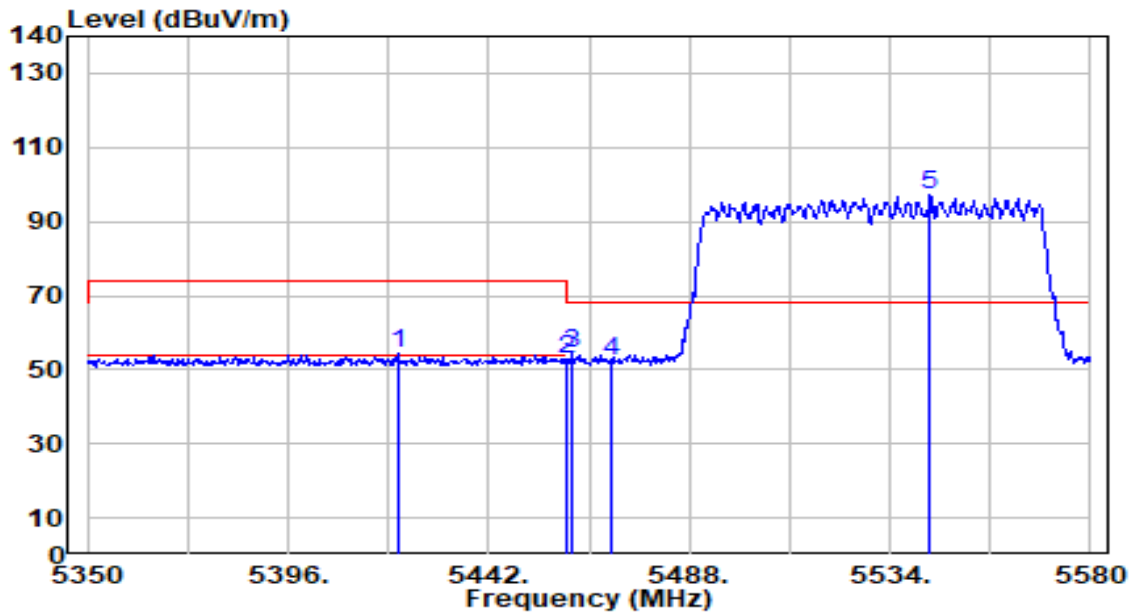


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5421.300	53.81	0.49	54.30	-19.70	74.00	100	351	Peak
2	5460.000	51.93	0.66	52.59	-21.41	74.00	100	351	Peak
3	* 5461.090	53.77	0.67	54.44	-13.76	68.20	100	351	Peak
4	5470.000	51.76	0.71	52.47	-15.73	68.20	100	351	Peak
5	5543.200	96.05	1.04	97.09	N/A	N/A	100	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

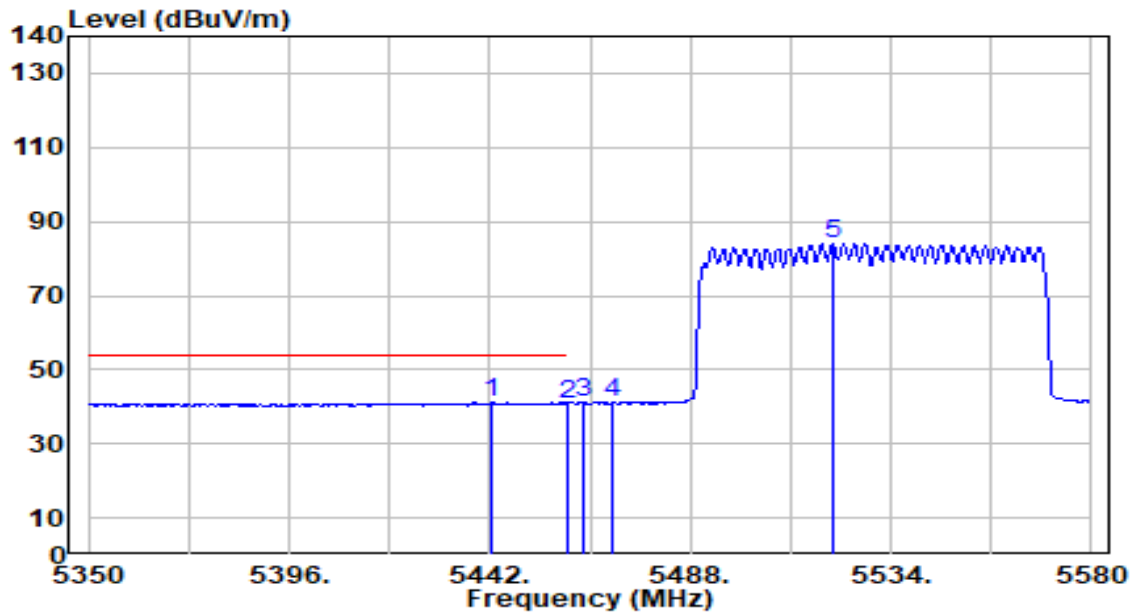


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5442.690	40.56	0.58	41.15	-12.85	54.00	100	351	Average
2		5460.000	40.25	0.66	40.92	-13.08	54.00	100	351	Average
3		5463.390	40.42	0.68	41.10	N/A	N/A	100	351	Average
4		5470.000	40.29	0.71	41.00	N/A	N/A	100	351	Average
5		5520.660	82.87	0.94	83.80	N/A	N/A	100	351	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

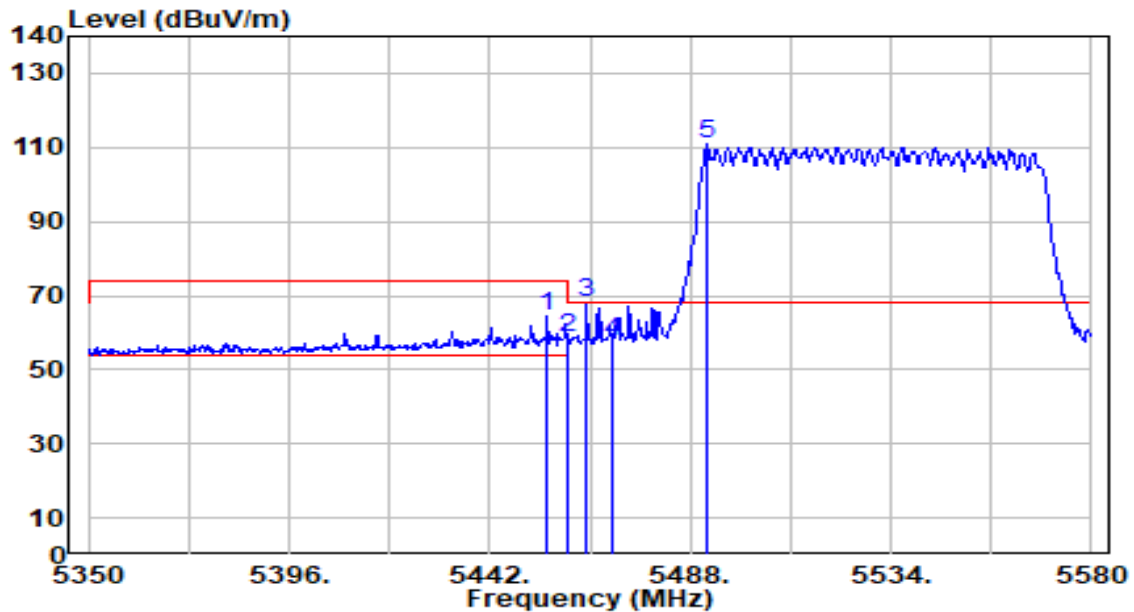


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.340	63.59	0.64	64.23	-9.77	74.00	160	31	Peak
2	5460.000	57.94	0.66	58.60	-15.40	74.00	160	31	Peak
3	* 5464.310	67.32	0.68	68.00	-0.20	68.20	160	31	Peak
4	5470.000	56.83	0.71	57.53	-10.67	68.20	160	31	Peak
5	5491.680	110.05	0.80	110.86	N/A	N/A	160	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

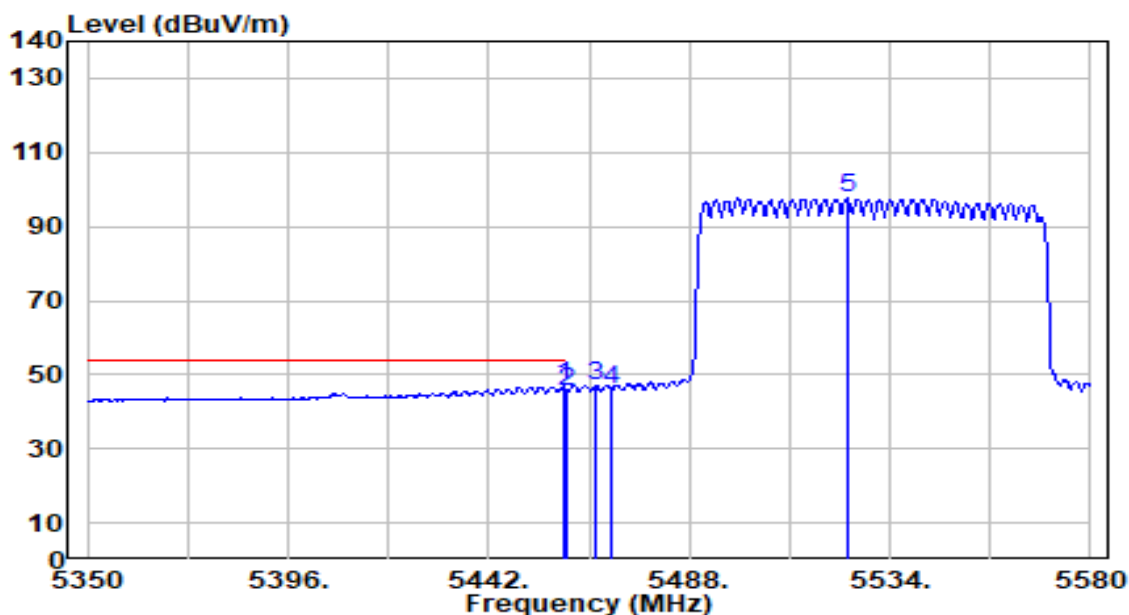


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5459.020	46.14	0.66	46.80	-7.20	54.00	160	31	Average
2		5460.000	44.94	0.66	45.60	-8.40	54.00	160	31	Average
3		5466.610	46.56	0.69	47.25	N/A	N/A	160	31	Average
4		5470.000	45.10	0.71	45.81	N/A	N/A	160	31	Average
5		5524.110	96.70	0.95	97.65	N/A	N/A	160	31	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

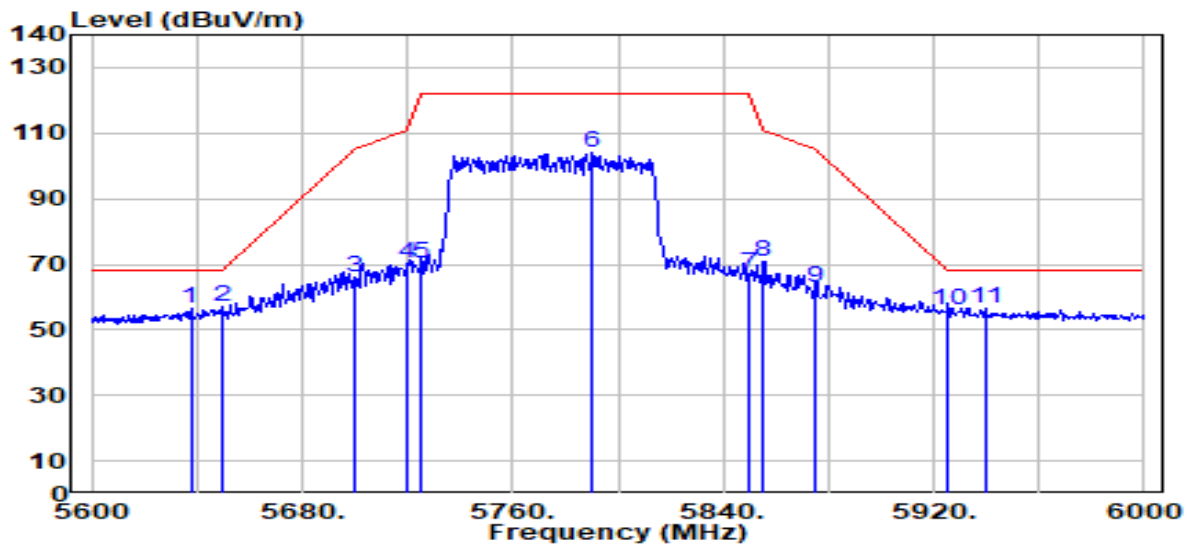


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5637.600	55.27	1.48	56.76	-11.44	68.20	130	358	Peak
2	*	5650.000	55.36	1.54	56.90	-11.30	68.20	130	358	Peak
3		5700.000	64.05	1.78	65.83	-39.37	105.20	130	358	Peak
4		5720.000	68.19	1.87	70.06	-40.74	110.80	130	358	Peak
5		5725.000	68.46	1.89	70.35	-51.85	122.20	130	358	Peak
6		5790.400	101.81	2.20	104.01	N/A	N/A	130	358	Peak
7		5850.000	64.92	2.25	67.18	-55.02	122.20	130	358	Peak
8		5855.000	68.67	2.25	70.92	-39.88	110.80	130	358	Peak
9		5875.000	60.80	2.26	63.06	-42.14	105.20	130	358	Peak
10		5925.000	53.67	2.27	55.94	-12.26	68.20	130	358	Peak
11		5939.600	54.49	2.27	56.76	-11.44	68.20	130	358	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

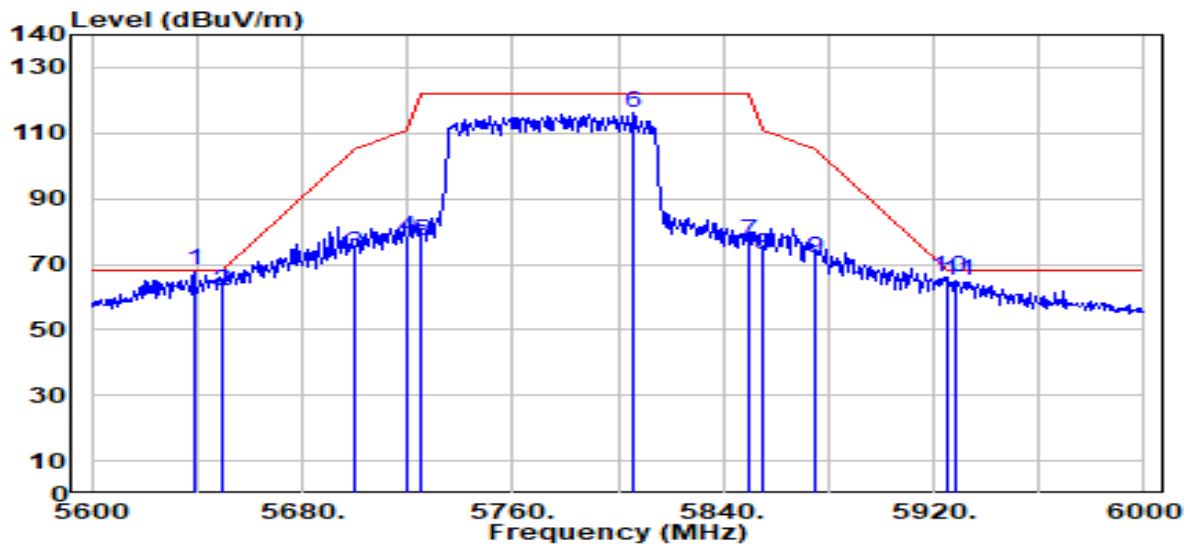


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.800	66.56	1.49	68.05	-0.15	68.20	200	0	Peak
2		5650.000	60.35	1.54	61.89	-6.31	68.20	200	0	Peak
3		5700.000	71.91	1.78	73.69	-31.51	105.20	200	0	Peak
4		5720.000	76.10	1.87	77.97	-32.83	110.80	200	0	Peak
5		5725.000	75.41	1.89	77.30	-44.90	122.20	200	0	Peak
6		5806.000	114.00	2.25	116.25	N/A	N/A	200	0	Peak
7		5850.000	74.96	2.25	77.21	-44.99	122.20	200	0	Peak
8		5855.000	70.50	2.25	72.75	-38.05	110.80	200	0	Peak
9		5875.000	69.38	2.26	71.64	-33.56	105.20	200	0	Peak
10		5925.000	63.65	2.27	65.91	-2.29	68.20	200	0	Peak
11		5928.800	62.79	2.27	65.05	-3.15	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

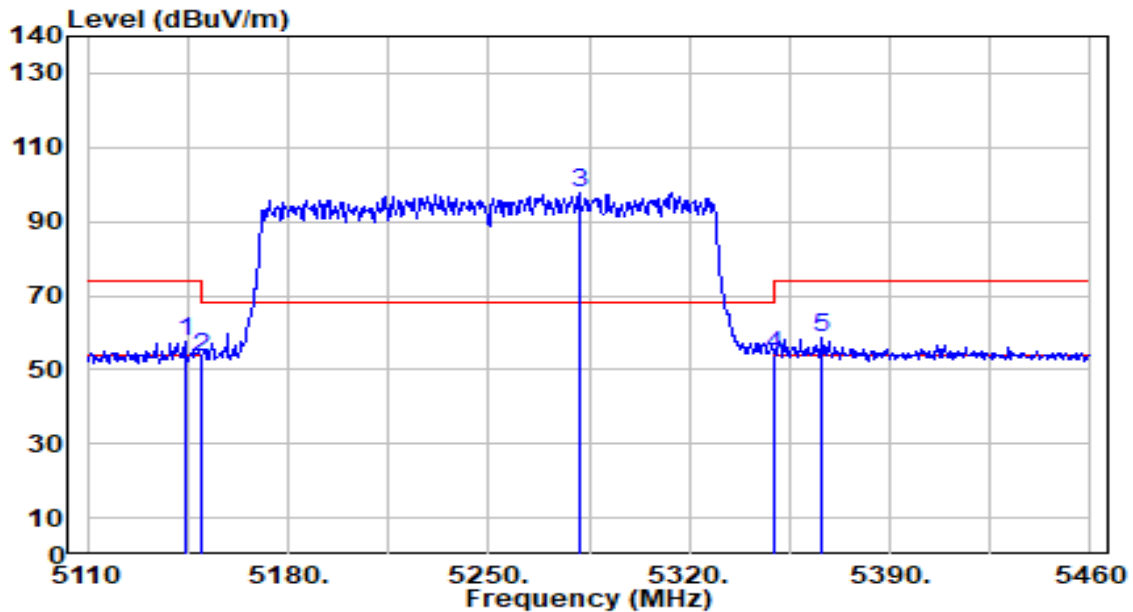


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.950	57.14	0.65	57.79	-16.21	74.00	150	343	Peak
2	5150.000	52.77	0.65	53.42	-20.58	74.00	150	343	Peak
3	5281.500	97.06	0.58	97.64	N/A	N/A	150	343	Peak
4	5350.000	53.32	0.47	53.79	-20.21	74.00	150	343	Peak
5	* 5366.550	57.98	0.45	58.42	-15.58	74.00	150	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

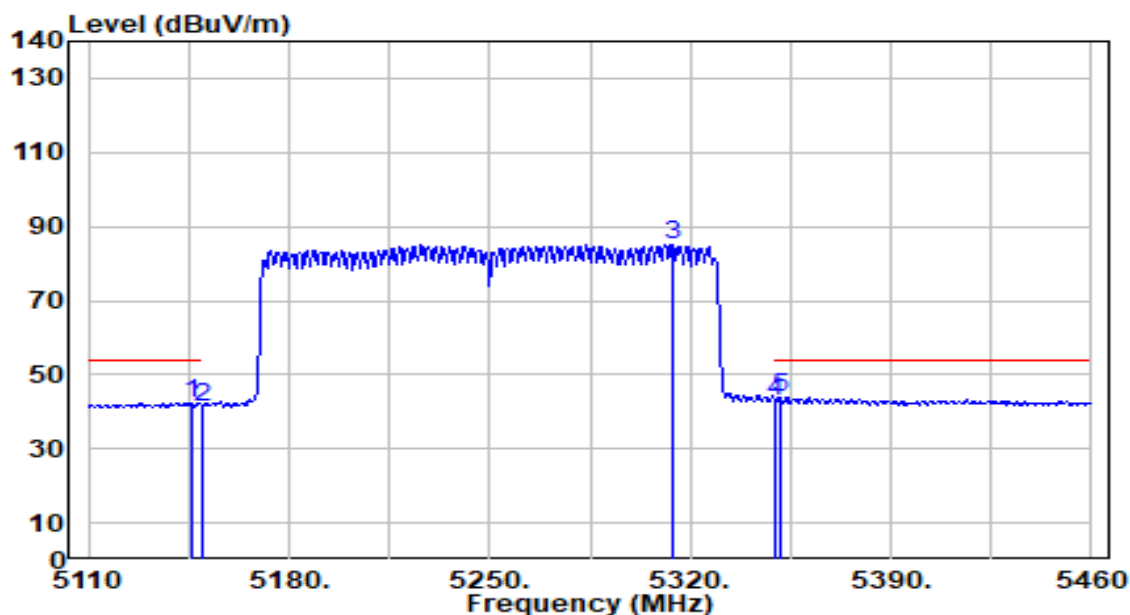


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.400	41.82	0.65	42.47	-11.53	54.00	150	343	Average
2	5150.000	40.81	0.65	41.47	-12.53	54.00	150	343	Average
3	5313.700	84.62	0.53	85.15	N/A	N/A	150	343	Average
4	5350.000	42.26	0.47	42.73	-11.27	54.00	150	343	Average
5	* 5351.500	43.44	0.47	43.91	-10.09	54.00	150	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

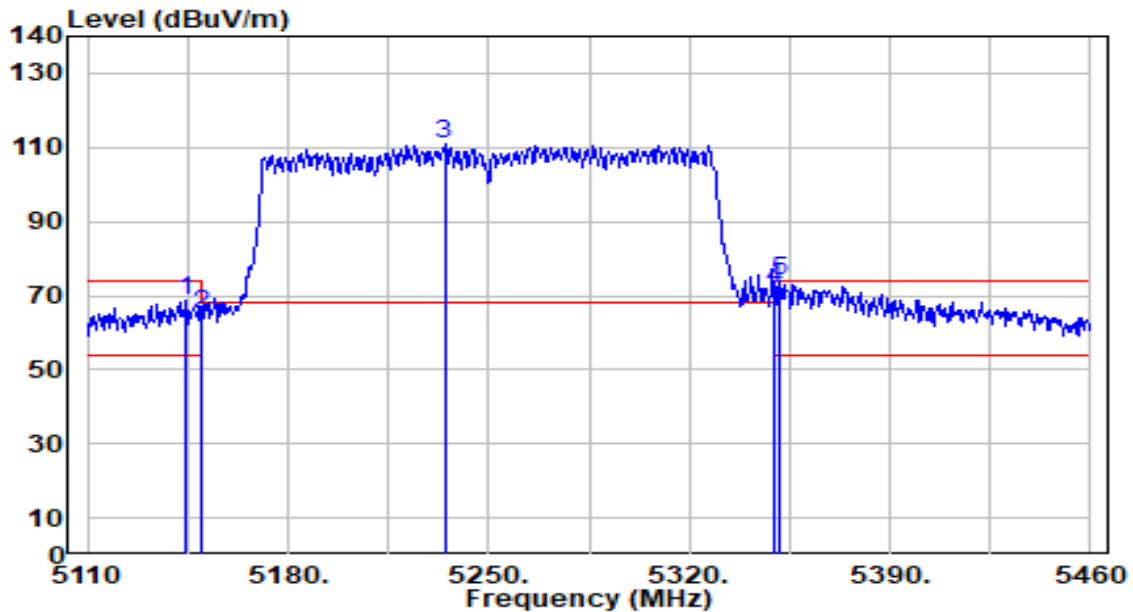


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5144.650	68.23	0.65	68.87	-5.13	74.00	136	33	Peak
2	5150.000	64.39	0.65	65.04	-8.96	74.00	136	33	Peak
3	5234.600	110.03	0.65	110.68	N/A	N/A	136	33	Peak
4	5350.000	71.24	0.47	71.72	-2.28	74.00	136	33	Peak
5	* 5351.500	73.39	0.47	73.86	-0.14	74.00	136	33	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

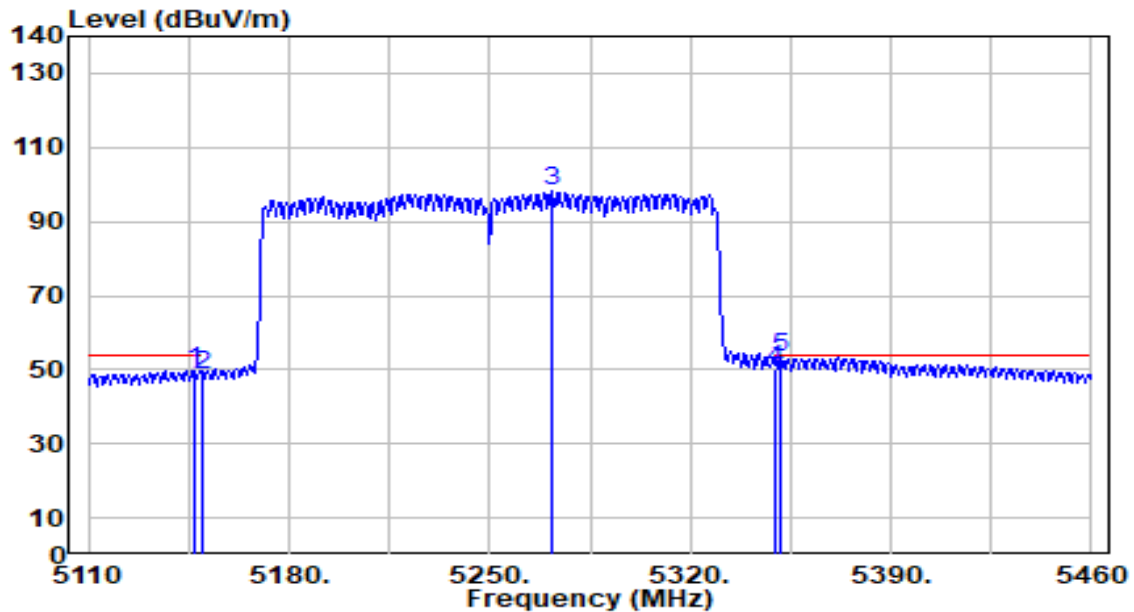


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.750	49.24	0.65	49.89	-4.11	54.00	136	33	Average
2	5150.000	48.03	0.65	48.68	-5.32	54.00	136	33	Average
3	5271.700	97.56	0.59	98.15	N/A	N/A	136	33	Average
4	5350.000	49.93	0.47	50.40	-3.60	54.00	136	33	Average
5	* 5351.500	52.72	0.47	53.19	-0.81	54.00	136	33	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

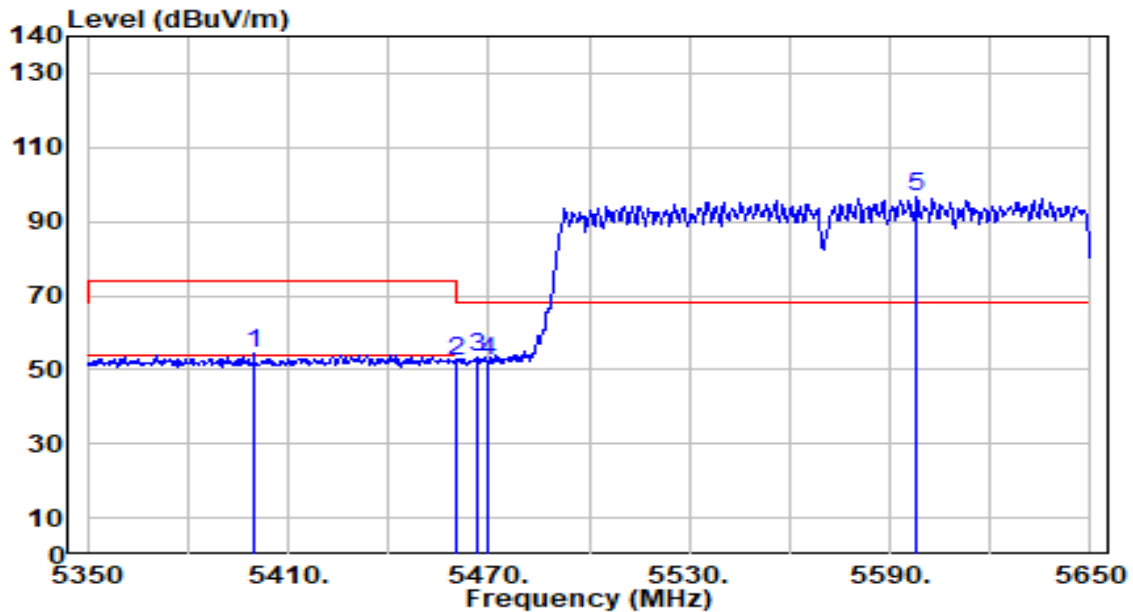


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5399.800	53.78	0.39	54.17	-19.83	74.00	0	0	Peak
2	5460.000	51.47	0.66	52.13	-21.87	74.00	0	0	Peak
3	* 5466.700	52.68	0.69	53.38	-14.82	68.20	0	0	Peak
4	5470.000	51.75	0.71	52.46	-15.74	68.20	0	0	Peak
5	5598.100	95.44	1.30	96.74	N/A	N/A	0	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

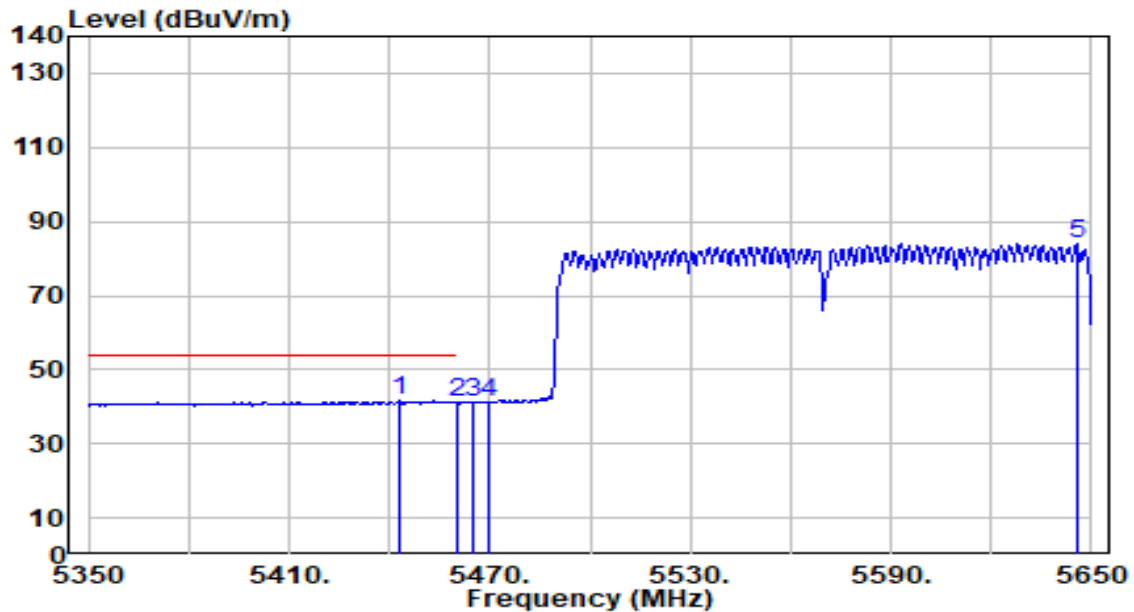


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5442.700	41.04	0.58	41.62	-12.38	54.00	100	353	Average
2		5460.000	40.54	0.66	41.20	-12.80	54.00	100	353	Average
3		5465.200	40.78	0.68	41.46	N/A	N/A	100	353	Average
4		5470.000	40.37	0.71	41.07	N/A	N/A	100	353	Average
5		5645.800	82.26	1.52	83.79	N/A	N/A	100	353	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

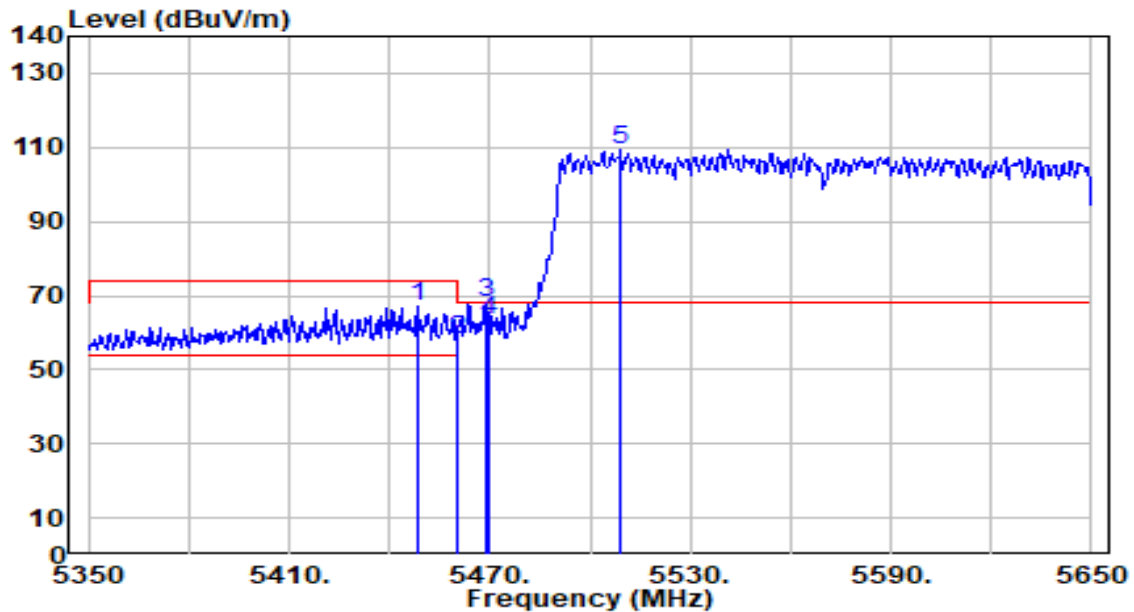


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.400	66.35	0.61	66.96	-7.04	74.00	160	0	Peak
2	5460.000	57.68	0.66	58.34	-15.66	74.00	160	0	Peak
3	* 5468.800	67.37	0.70	68.07	-0.13	68.20	160	0	Peak
4	5470.000	62.52	0.71	63.22	-4.98	68.20	160	0	Peak
5	5509.000	108.51	0.88	109.39	N/A	N/A	160	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

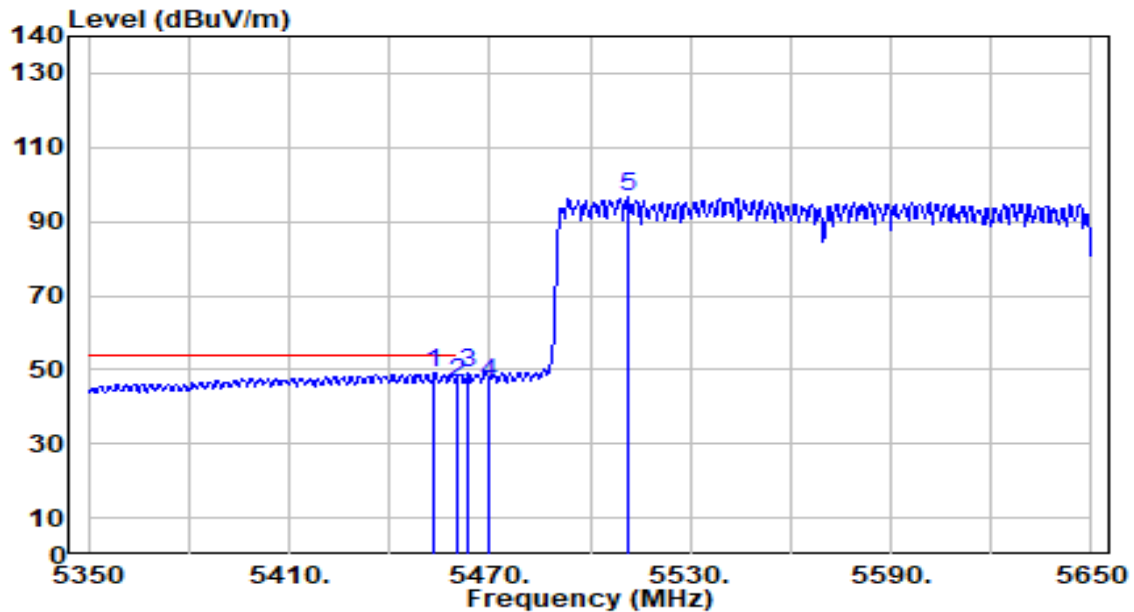


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.500	48.52	0.63	49.16	-4.84	54.00	160	0	Average
2		5460.000	45.97	0.66	46.64	-7.36	54.00	160	0	Average
3		5463.700	48.37	0.68	49.05	N/A	N/A	160	0	Average
4		5470.000	46.02	0.71	46.72	N/A	N/A	160	0	Average
5		5511.400	95.53	0.89	96.42	N/A	N/A	160	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

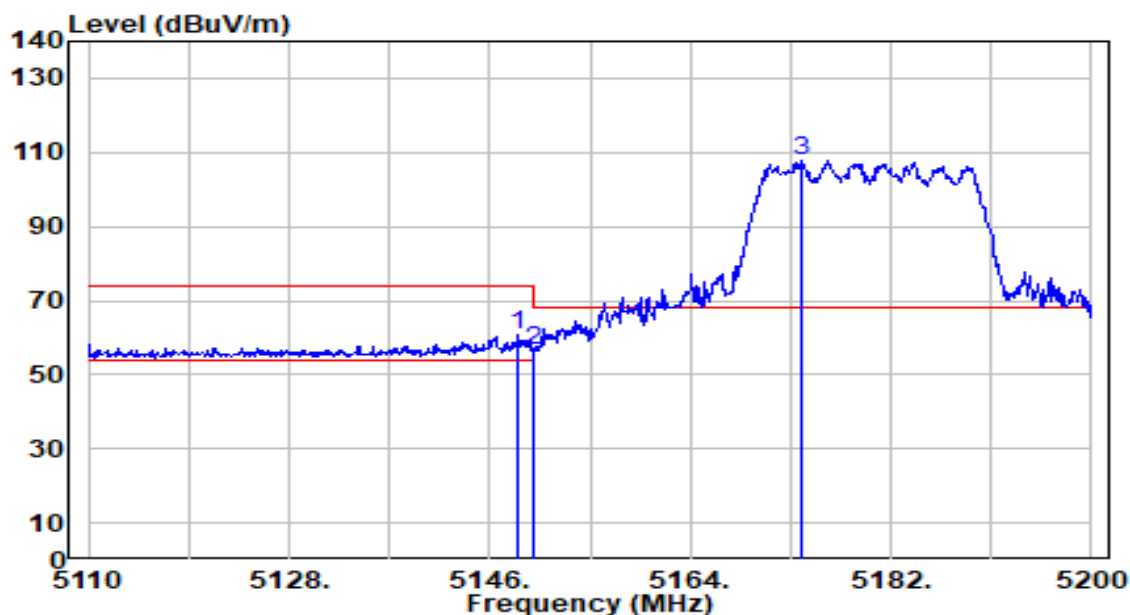


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.610	60.05	0.65	60.70	-13.30	74.00	150	340	Peak
2		5150.000	55.80	0.65	56.45	-17.55	74.00	150	340	Peak
3		5173.900	107.31	0.68	107.99	N/A	N/A	150	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

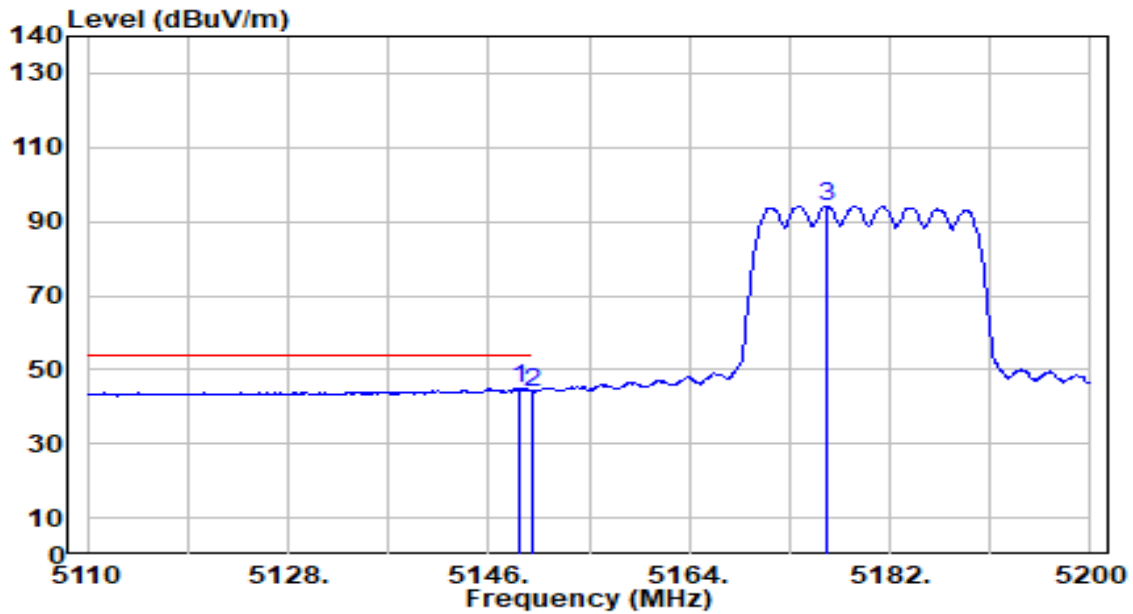


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	44.40	0.65	45.05	-8.95	54.00	150	340	Average
2		5150.000	43.41	0.65	44.07	-9.93	54.00	150	340	Average
3		5176.330	93.57	0.68	94.25	N/A	N/A	150	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

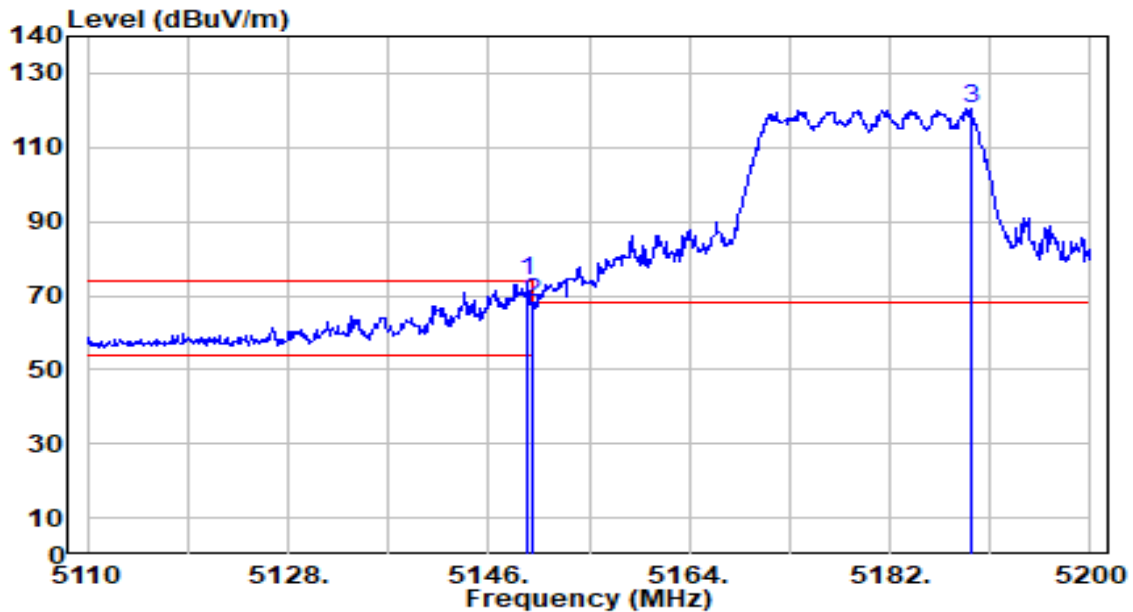


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.510	73.15	0.65	73.80	-0.20	74.00	136	358	Peak
2		5150.000	67.59	0.65	68.24	-5.76	74.00	136	358	Peak
3		5189.200	119.78	0.69	120.47	N/A	N/A	136	358	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

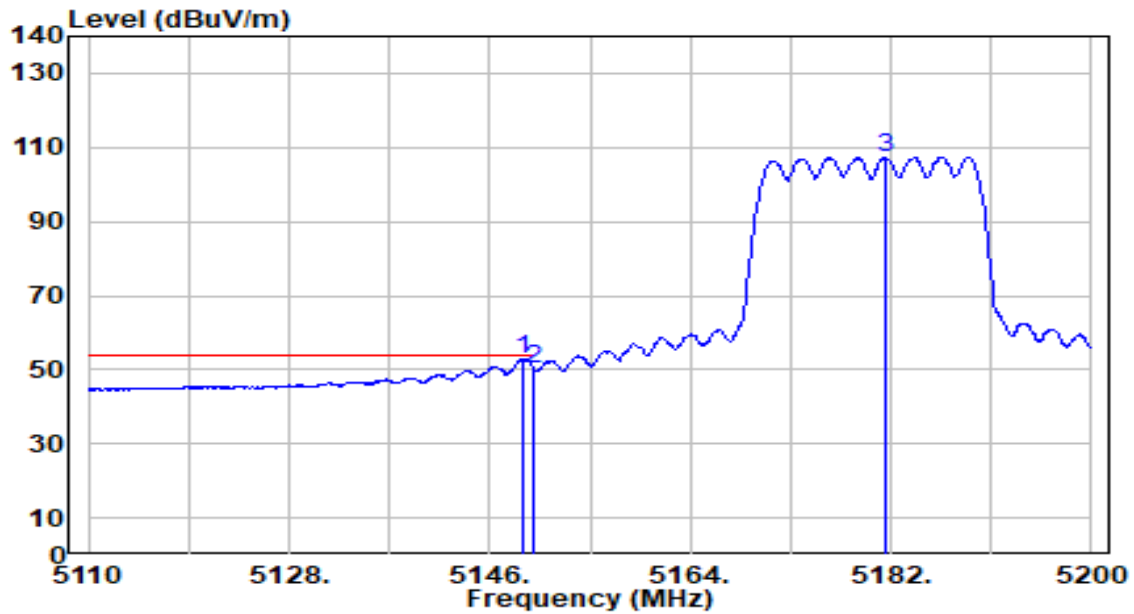


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	52.23	0.65	52.88	-1.12	54.00	136	358	Average
2		5150.000	49.48	0.65	50.14	-3.86	54.00	136	358	Average
3		5181.460	106.69	0.68	107.37	N/A	N/A	136	358	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplicifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

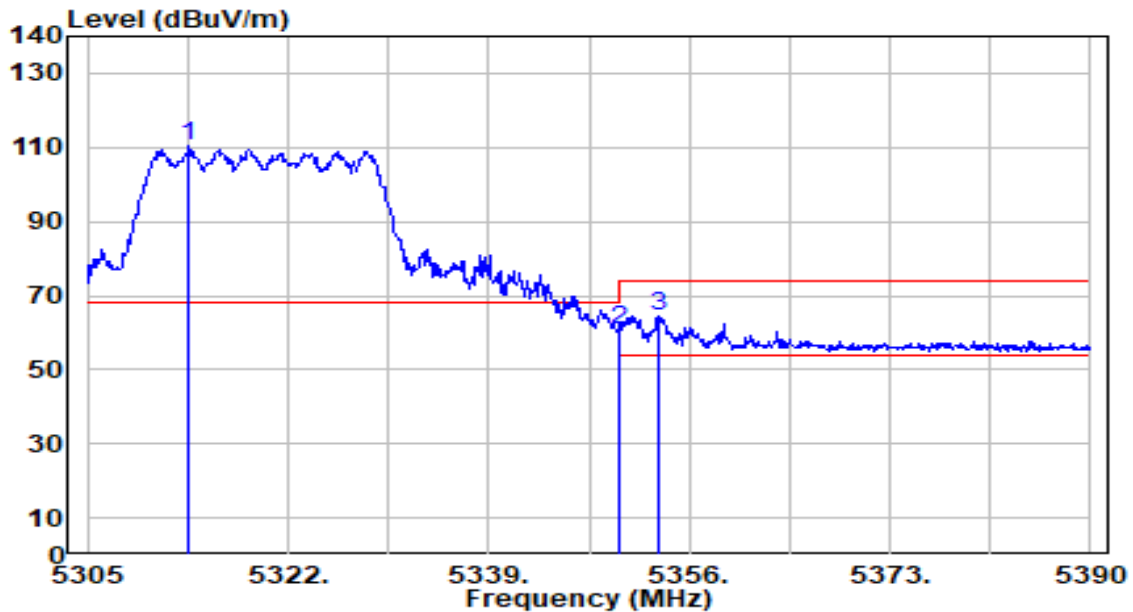


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.585	109.67	0.53	110.19	N/A	N/A	140	343	Peak
2	5350.000	60.18	0.47	60.65	-13.35	74.00	140	343	Peak
3	* 5353.365	64.06	0.47	64.52	-9.48	74.00	140	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

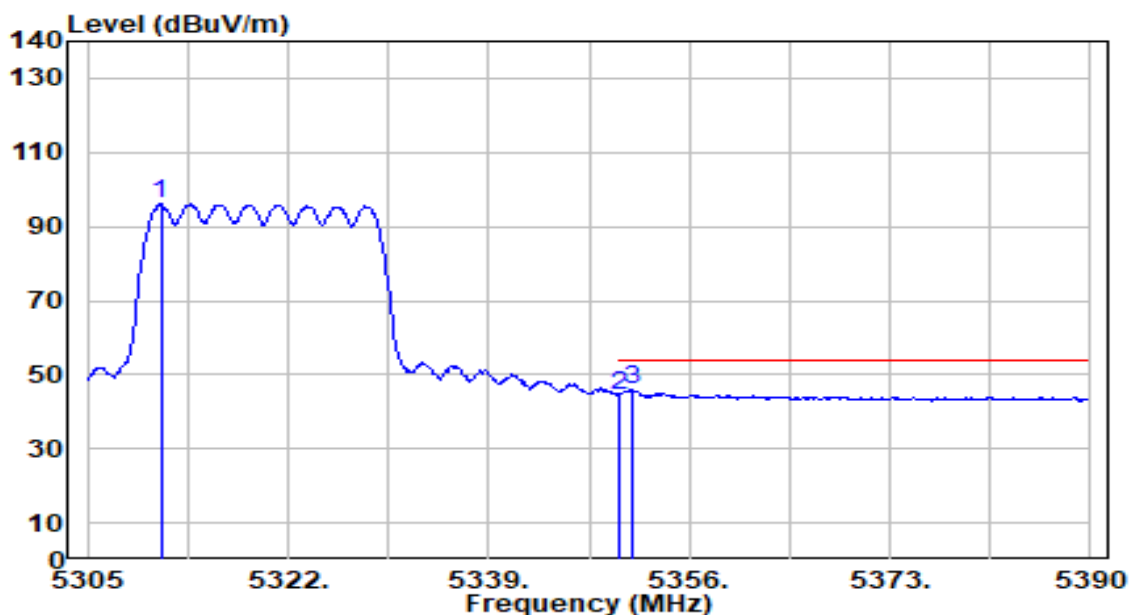


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.205	95.45	0.53	95.98	N/A	N/A	140	343	Average
2	5350.000	44.02	0.47	44.49	-9.51	54.00	140	343	Average
3	* 5351.155	45.65	0.47	46.12	-7.88	54.00	140	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

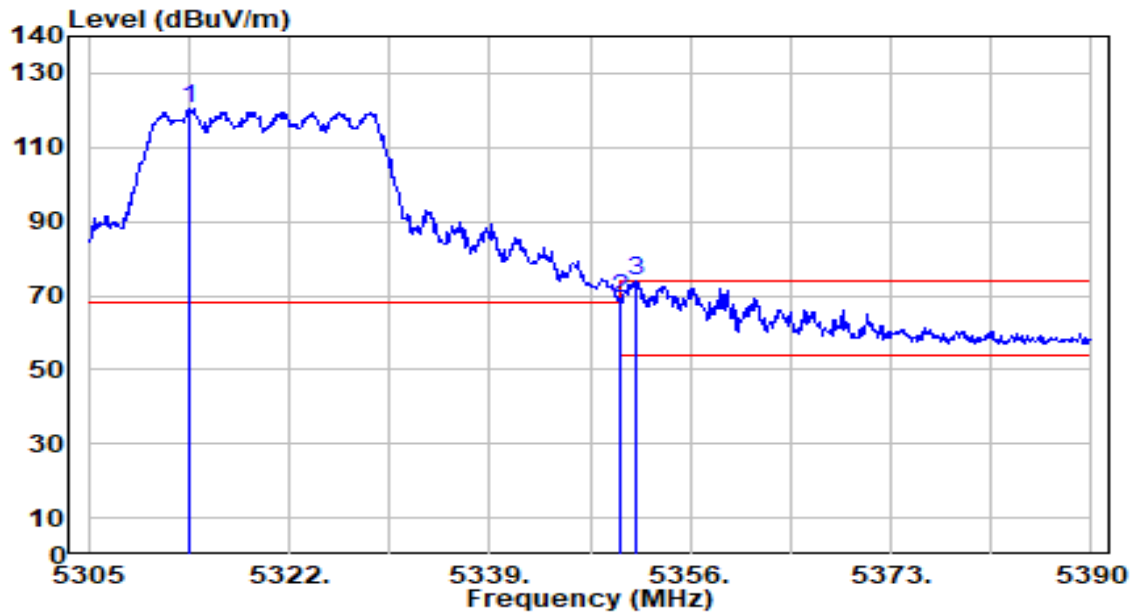


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.500	119.83	0.53	120.36	N/A	N/A	136	360	Peak
2	5350.000	68.65	0.47	69.12	-4.88	74.00	136	360	Peak
3	* 5351.325	73.32	0.47	73.79	-0.21	74.00	136	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

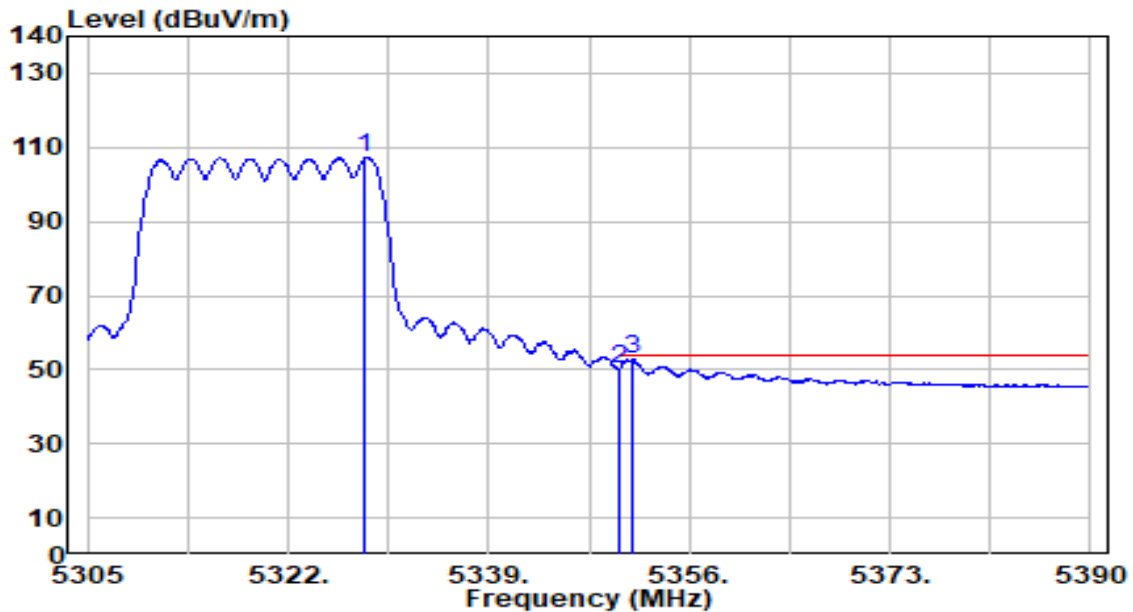


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.545	106.80	0.50	107.30	N/A	N/A	136	360	Average
2	5350.000	49.76	0.47	50.23	-3.77	54.00	136	360	Average
3	* 5351.240	52.39	0.47	52.85	-1.15	54.00	136	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

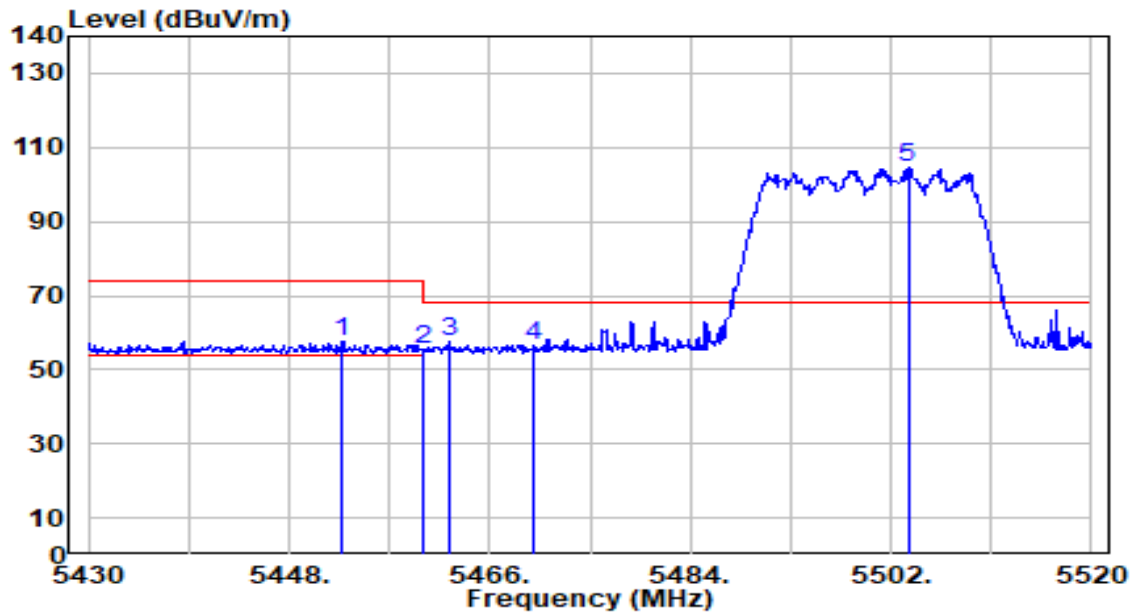


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.770	57.14	0.63	57.77	-16.23	74.00	148	345	Peak
2	5460.000	54.85	0.66	55.51	-18.49	74.00	148	345	Peak
3	* 5462.310	56.78	0.67	57.45	-10.75	68.20	148	345	Peak
4	5470.000	55.96	0.71	56.66	-11.54	68.20	148	345	Peak
5	5503.530	103.89	0.86	104.75	N/A	N/A	148	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

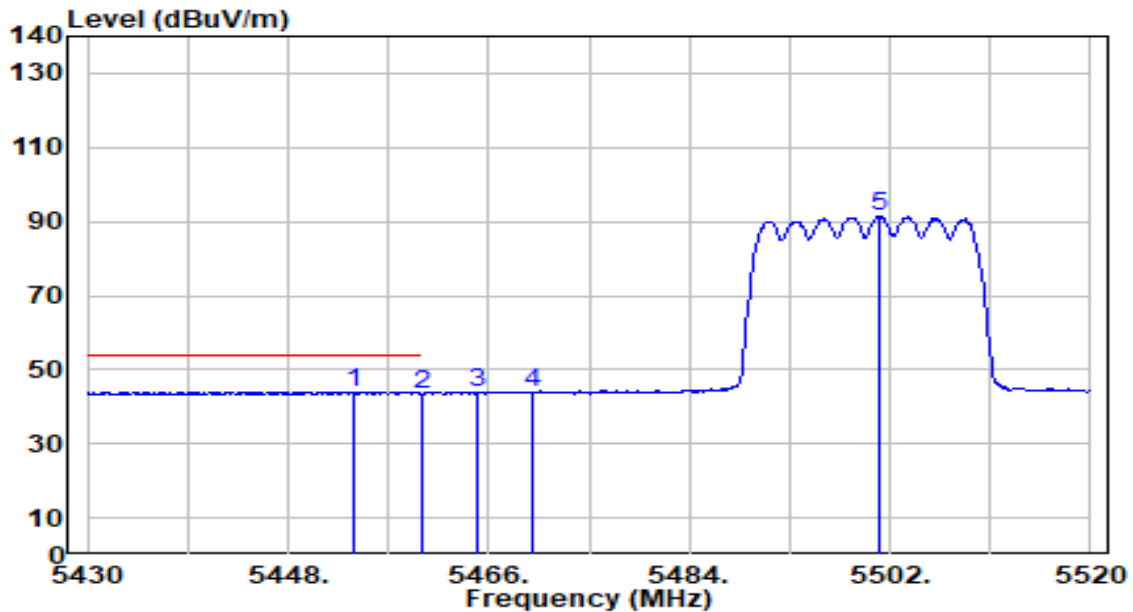


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.850	43.45	0.63	44.08	-9.92	54.00	148	345	Average
2		5460.000	42.92	0.66	43.58	-10.42	54.00	148	345	Average
3		5465.010	43.33	0.68	44.02	N/A	N/A	148	345	Average
4		5470.000	43.16	0.71	43.87	N/A	N/A	148	345	Average
5		5501.100	90.53	0.85	91.37	N/A	N/A	148	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

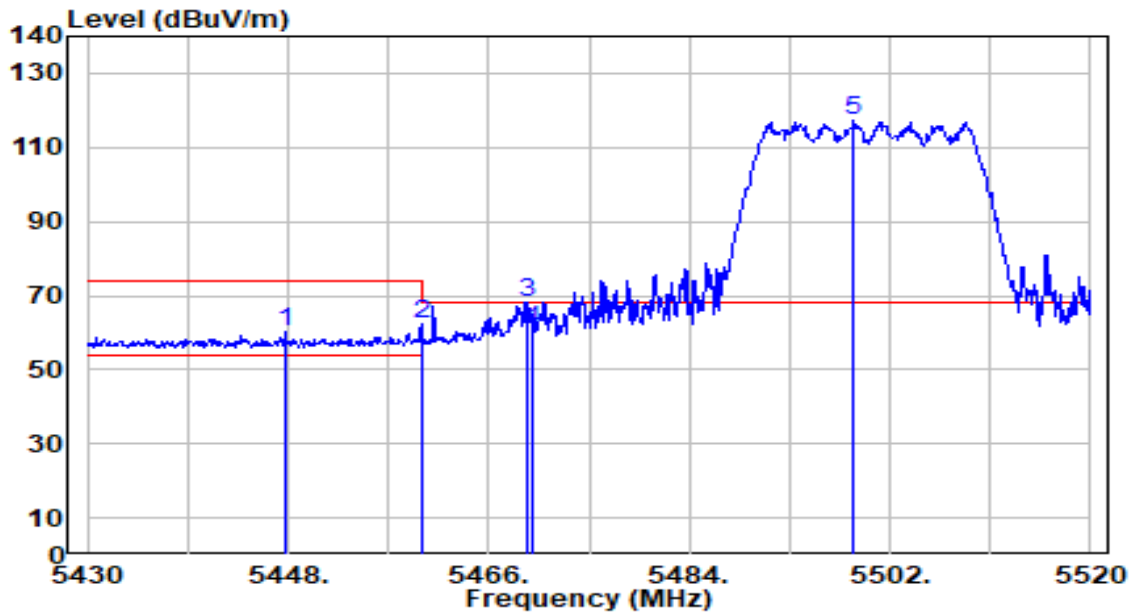


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.730	59.51	0.61	60.11	-13.89	74.00	160	0	Peak
2	5460.000	61.65	0.66	62.32	-11.68	74.00	160	0	Peak
3	* 5469.420	67.31	0.70	68.02	-0.18	68.20	160	0	Peak
4	5470.000	59.86	0.71	60.56	-7.64	68.20	160	0	Peak
5	5498.760	116.52	0.83	117.35	N/A	N/A	160	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

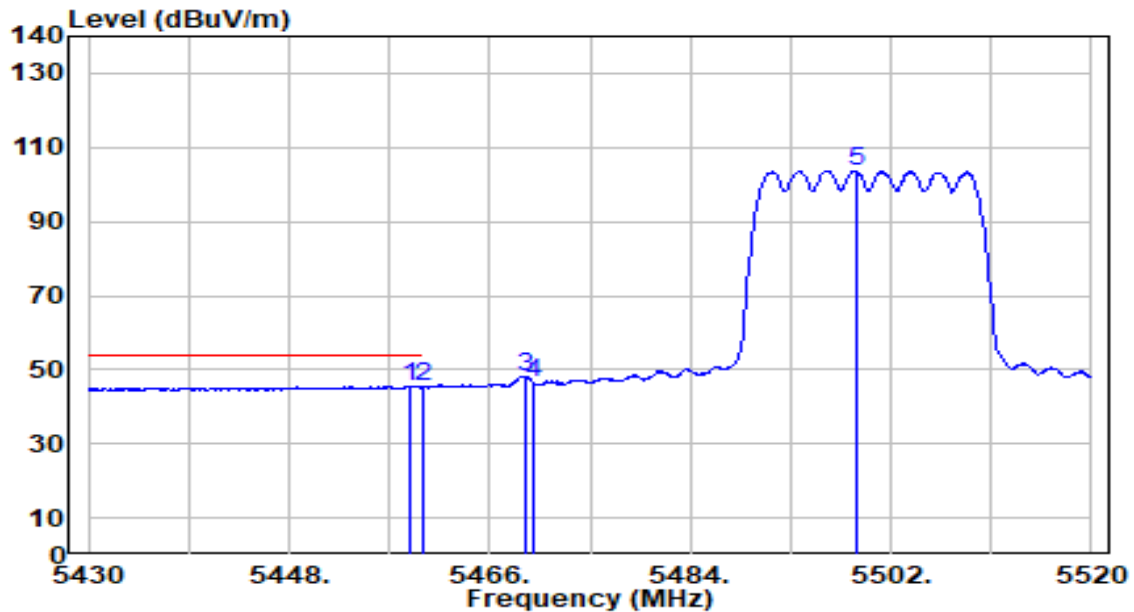


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.800	44.91	0.66	45.57	-8.43	54.00	160	0	Average
2		5460.000	44.66	0.66	45.32	-8.68	54.00	160	0	Average
3		5469.240	47.54	0.70	48.24	N/A	N/A	160	0	Average
4		5470.000	45.92	0.71	46.62	N/A	N/A	160	0	Average
5		5498.940	102.94	0.84	103.78	N/A	N/A	160	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

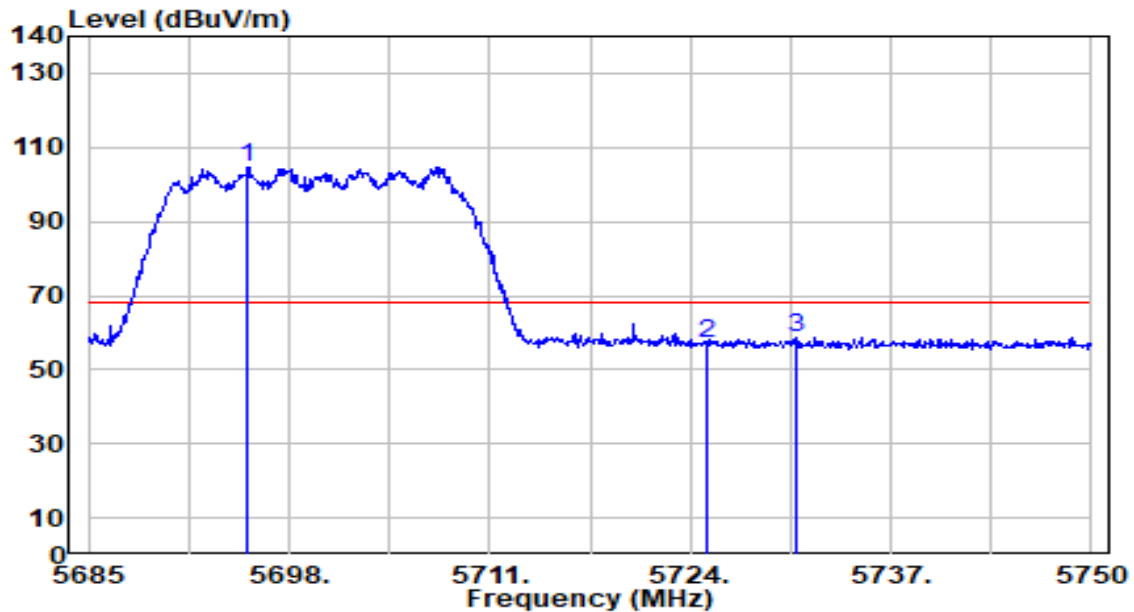


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.335	103.00	1.75	104.76	N/A	N/A	0	0	Peak
2	5725.000	55.14	1.89	57.04	-11.16	68.20	0	0	Peak
3	* 5730.825	56.79	1.92	58.71	-9.49	68.20	0	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

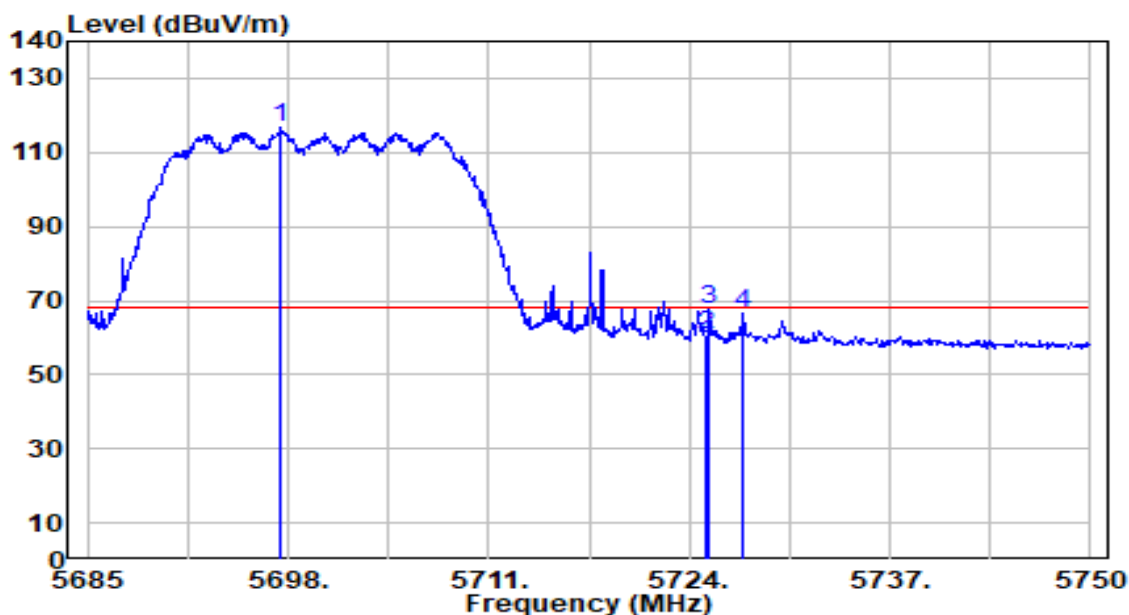


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.480	114.78	1.76	116.54	N/A	N/A	160	14	Peak
2	5725.000	58.73	1.89	60.63	-7.57	68.20	160	14	Peak
3	* 5725.300	65.79	1.89	67.68	-0.52	68.20	160	14	Peak
4	5727.510	64.51	1.90	66.42	-1.78	68.20	160	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

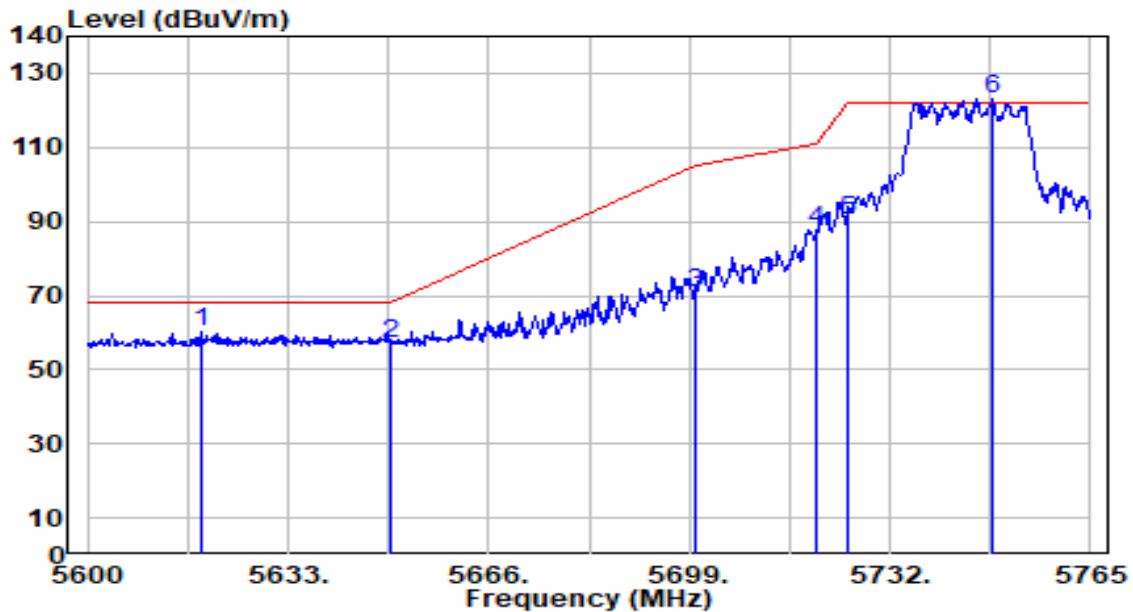


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5618.645	58.66	1.40	60.05	-8.15	68.20	0	0	Peak
2		5650.000	55.46	1.54	57.00	-11.20	68.20	0	0	Peak
3		5700.000	68.78	1.78	70.56	-34.64	105.20	0	0	Peak
4		5720.000	85.76	1.87	87.63	-23.17	110.80	0	0	Peak
5		5725.000	88.41	1.89	90.31	-31.89	122.20	0	0	Peak
6		5748.995	121.09	2.01	123.09	N/A	N/A	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

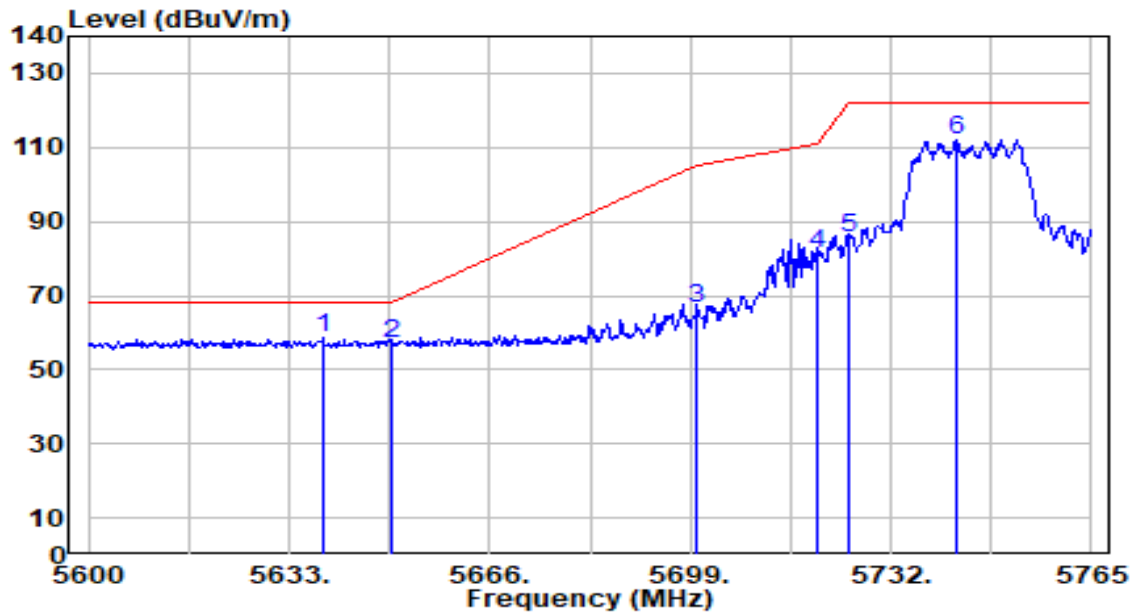


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.610	57.18	1.49	58.67	-9.53	68.20	100	360	Peak
2		5650.000	55.76	1.54	57.31	-10.89	68.20	100	360	Peak
3		5700.000	64.82	1.78	66.60	-38.60	105.20	100	360	Peak
4		5720.000	79.63	1.87	81.50	-29.30	110.80	100	360	Peak
5		5725.000	83.95	1.89	85.84	-36.36	122.20	100	360	Peak
6		5742.890	109.93	1.98	111.91	N/A	N/A	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

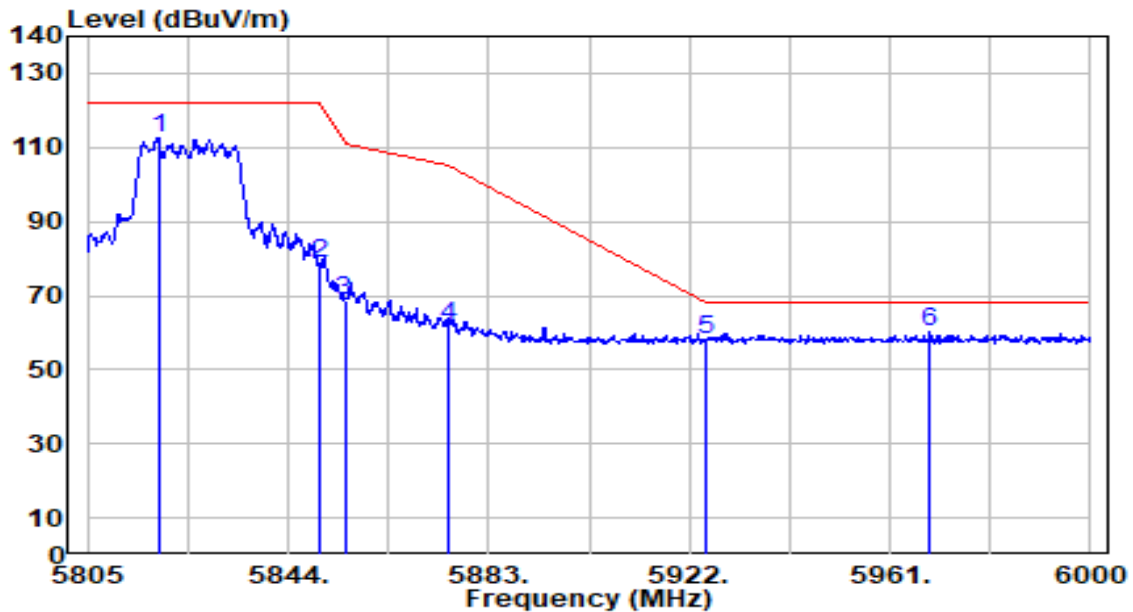


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5818.845	110.18	2.25	112.43	N/A	N/A	100	67	Peak
2	5850.000	76.61	2.25	78.86	-43.34	122.20	100	67	Peak
3	5855.000	66.63	2.25	68.89	-41.91	110.80	100	67	Peak
4	5875.000	59.46	2.26	61.72	-43.48	105.20	100	67	Peak
5	5925.000	55.79	2.27	58.06	-10.14	68.20	100	67	Peak
6	* 5968.605	57.94	2.27	60.22	-7.98	68.20	100	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

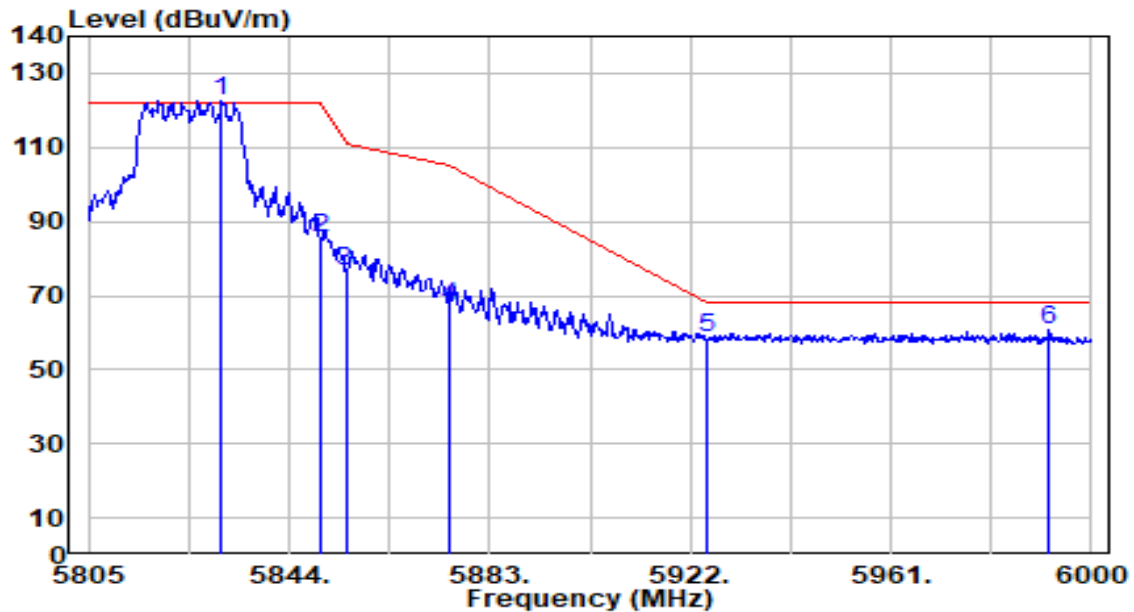


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5830.935	120.54	2.25	122.79	N/A	N/A	200	0	Peak
2	5850.000	83.36	2.25	85.61	-36.59	122.20	200	0	Peak
3	5855.000	74.58	2.25	76.83	-33.97	110.80	200	0	Peak
4	5875.000	65.05	2.26	67.31	-37.89	105.20	200	0	Peak
5	5925.000	56.32	2.27	58.59	-9.61	68.20	200	0	Peak
6	* 5991.810	58.23	2.28	60.51	-7.69	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

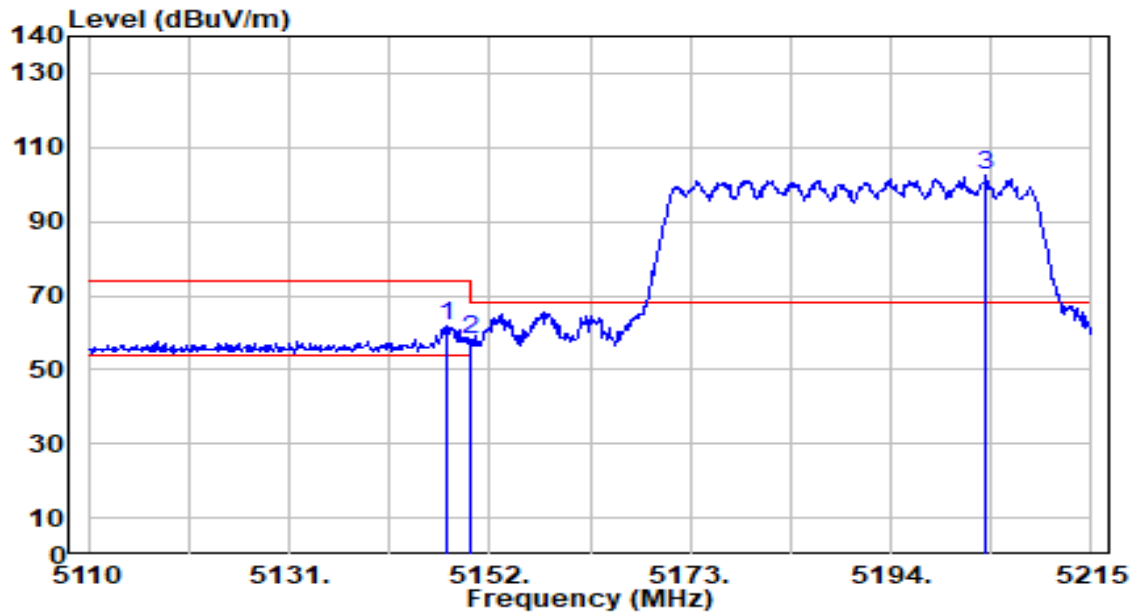


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.485	60.94	0.65	61.59	-12.41	74.00	150	341	Peak
2		5150.000	57.63	0.65	58.28	-15.72	74.00	150	341	Peak
3		5203.870	101.74	0.70	102.43	N/A	N/A	150	341	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

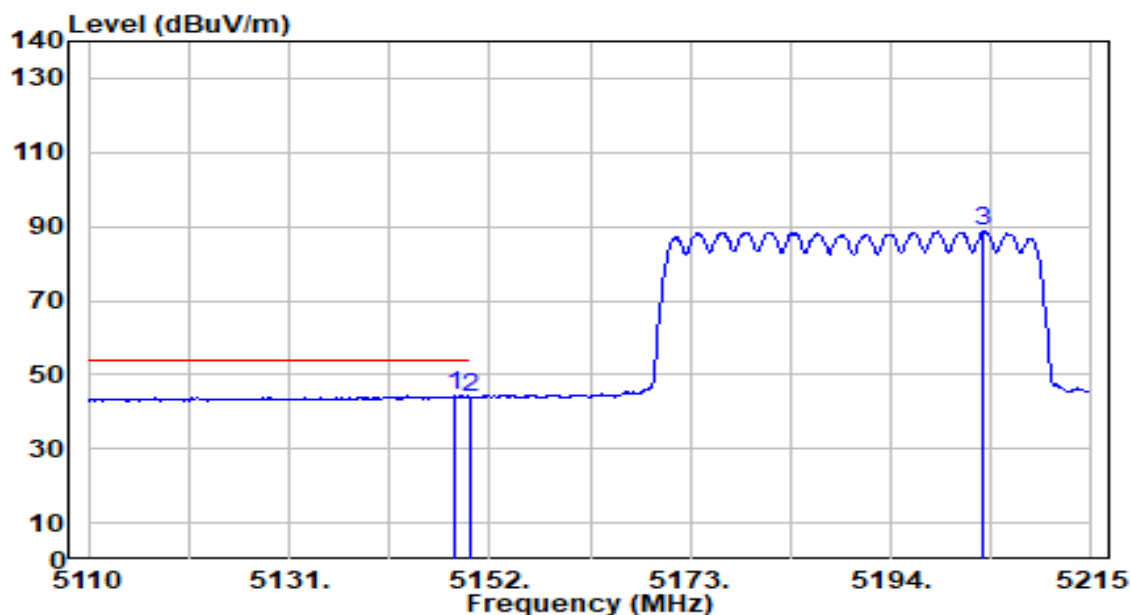


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.325	43.66	0.65	44.31	-9.69	54.00	150	341	Average
2		5150.000	43.12	0.65	43.78	-10.22	54.00	150	341	Average
3		5203.660	87.87	0.70	88.57	N/A	N/A	150	341	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

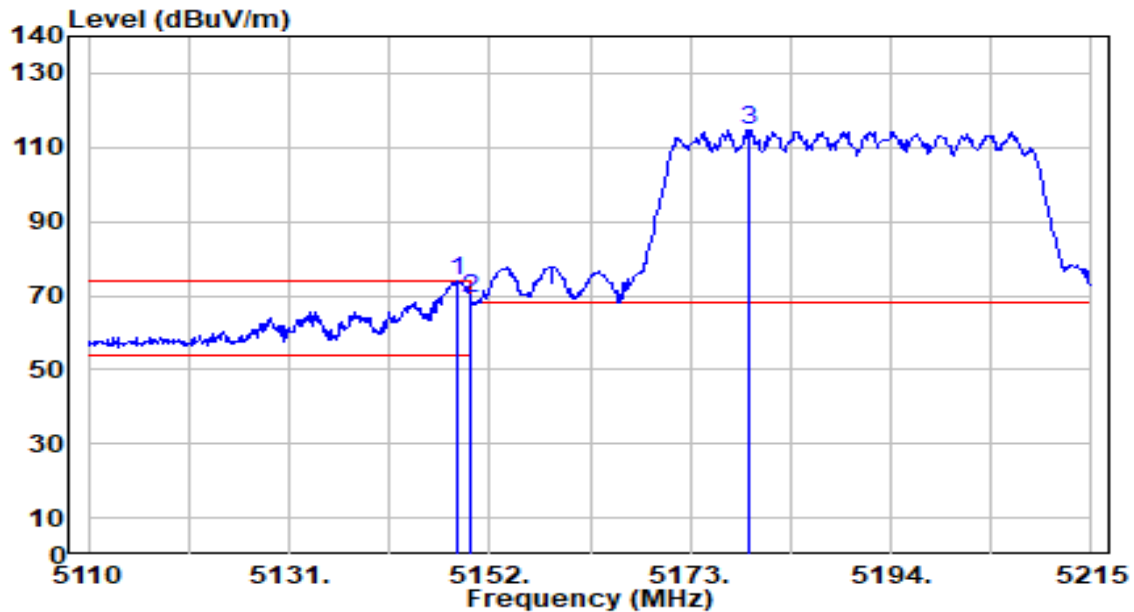


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.745	73.20	0.65	73.85	-0.15	74.00	136	356	Peak
2		5150.000	68.74	0.65	69.39	-4.61	74.00	136	356	Peak
3		5179.090	114.03	0.68	114.72	N/A	N/A	136	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

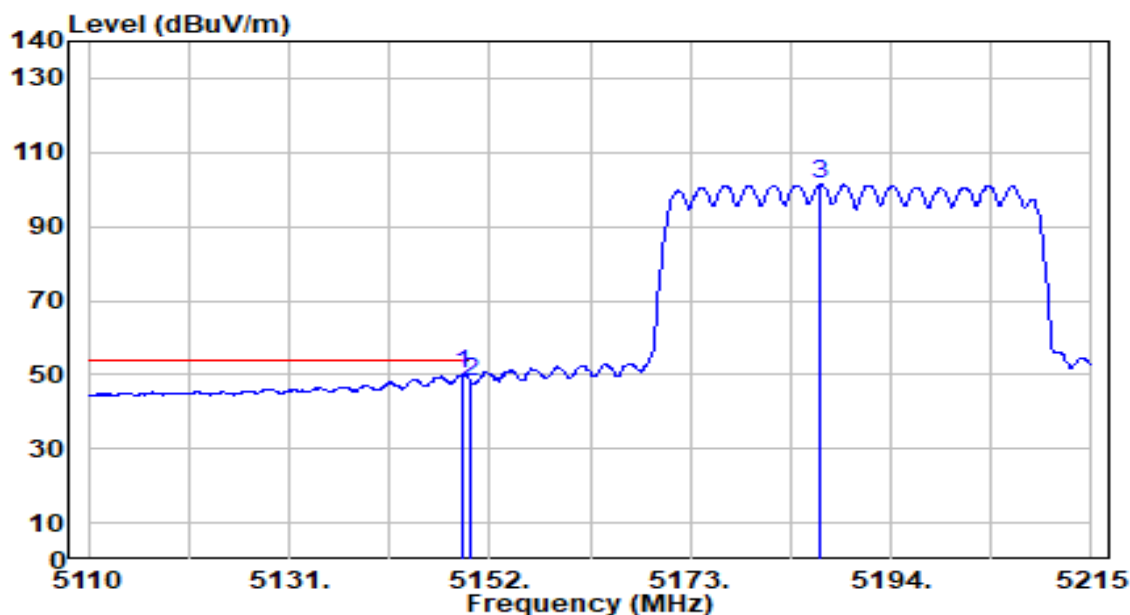


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	49.30	0.65	49.95	-4.05	54.00	136	356	Average
2		5150.000	47.63	0.65	48.29	-5.71	54.00	136	356	Average
3		5186.650	100.72	0.69	101.41	N/A	N/A	136	356	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

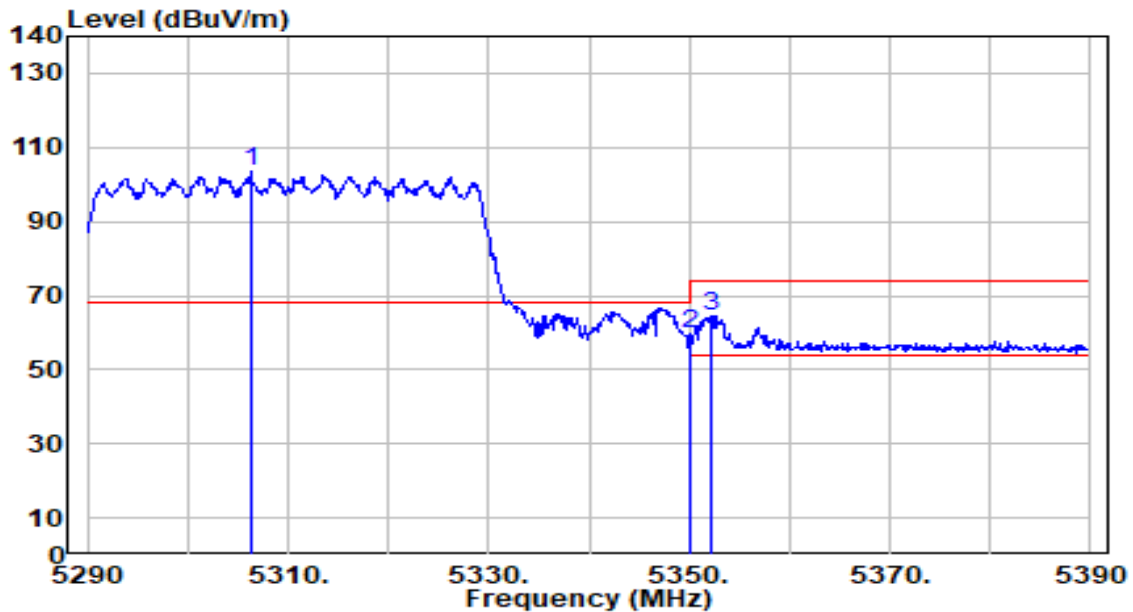


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.300	102.81	0.54	103.35	N/A	N/A	150	343	Peak
2	5350.000	59.17	0.47	59.64	-14.36	74.00	150	343	Peak
3	* 5352.100	64.13	0.47	64.59	-9.41	74.00	150	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

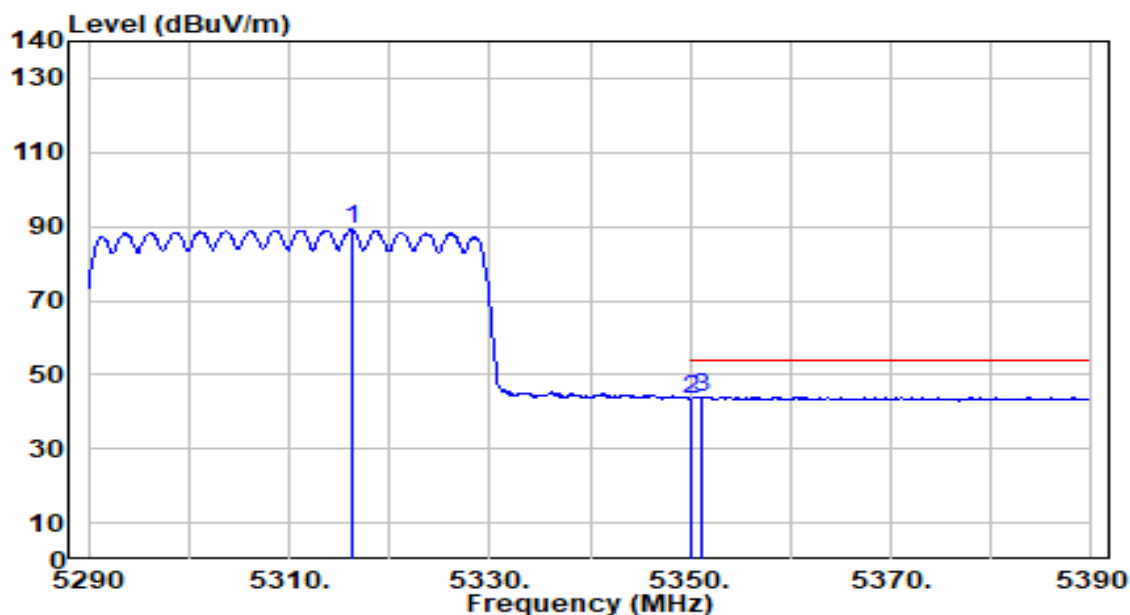


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.200	88.60	0.52	89.13	N/A	N/A	150	343	Average
2	5350.000	43.08	0.47	43.55	-10.45	54.00	150	343	Average
3	* 5351.200	43.62	0.47	44.09	-9.91	54.00	150	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

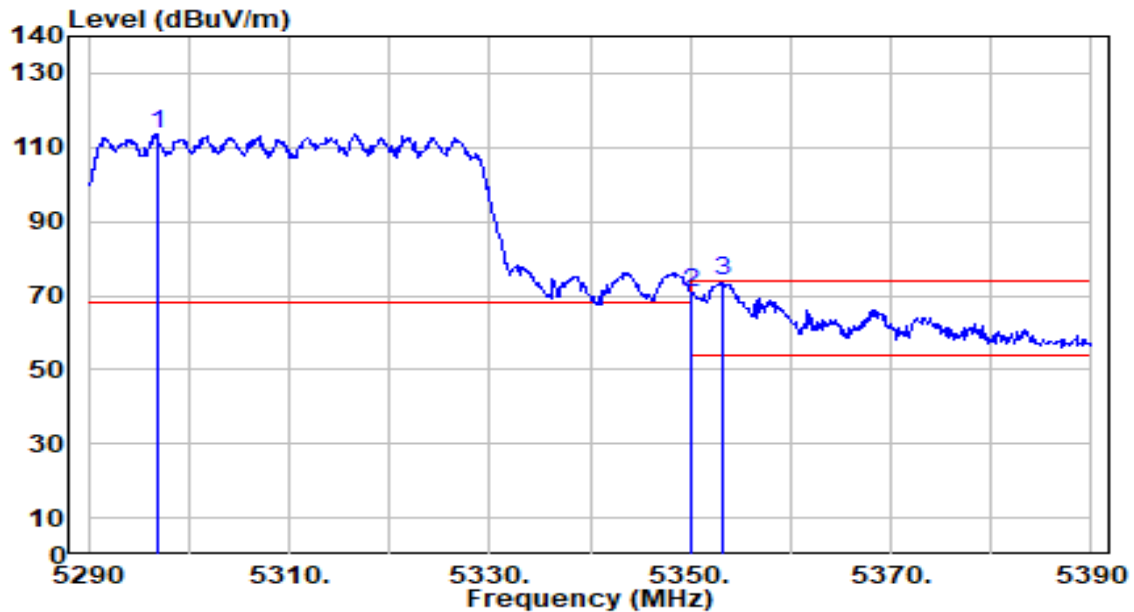


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.900	113.26	0.55	113.82	N/A	N/A	136	29	Peak
2	5350.000	70.28	0.47	70.75	-3.25	74.00	136	29	Peak
3	* 5353.200	73.33	0.47	73.80	-0.20	74.00	136	29	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

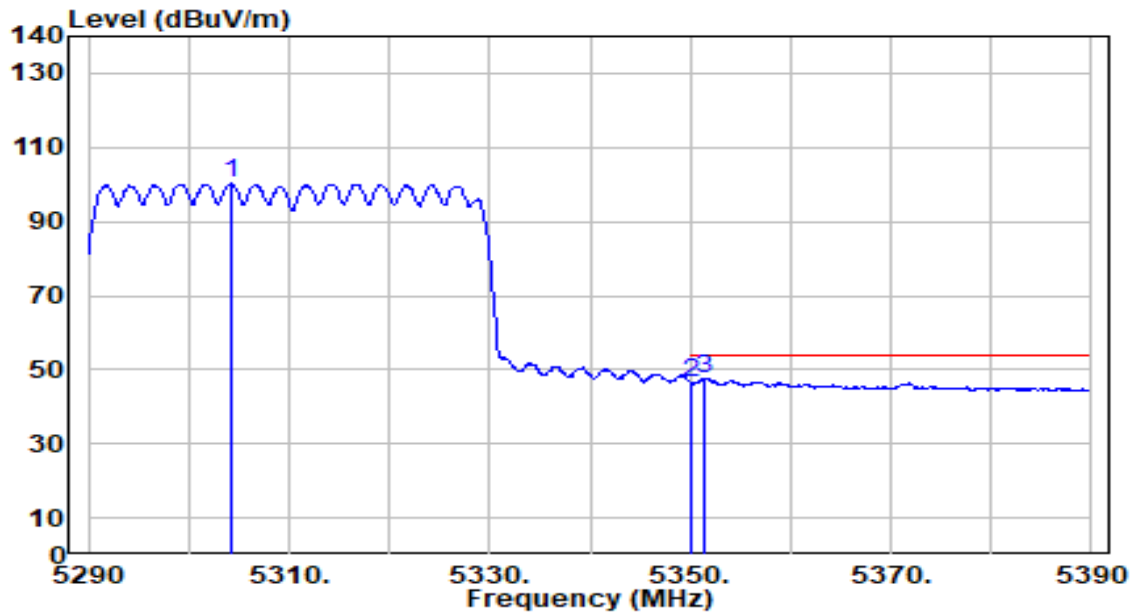


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.200	99.60	0.54	100.14	N/A	N/A	136	29	Average
2	5350.000	46.06	0.47	46.53	-7.47	54.00	136	29	Average
3	* 5351.400	47.18	0.47	47.65	-6.35	54.00	136	29	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

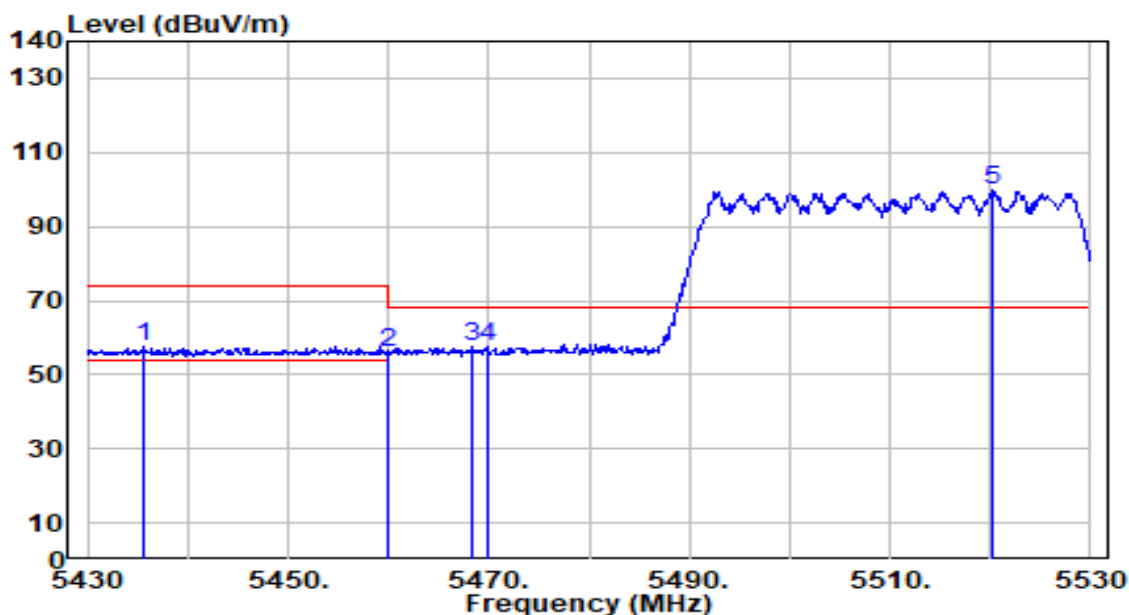


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5435.700	56.90	0.55	57.45	-16.55	74.00	100	358	Peak
2	5460.000	55.14	0.66	55.80	-18.20	74.00	100	358	Peak
3	5468.400	56.63	0.70	57.33	-10.87	68.20	100	358	Peak
4	* 5470.000	56.82	0.71	57.52	-10.68	68.20	100	358	Peak
5	5520.100	98.98	0.93	99.91	N/A	N/A	100	358	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

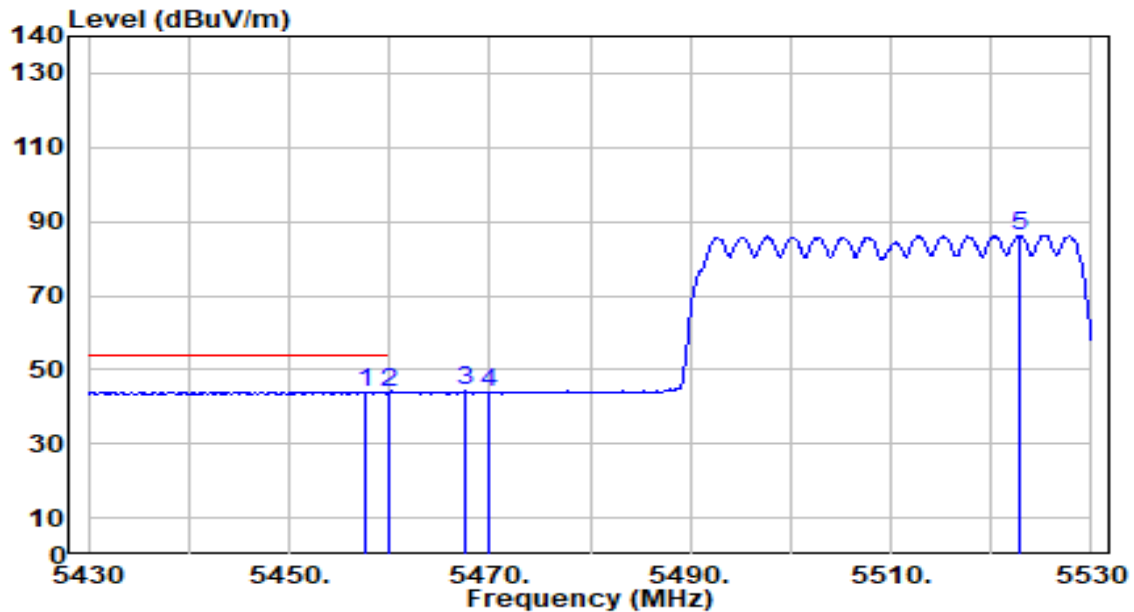


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.700	43.35	0.65	44.00	-10.00	54.00	100	358	Average
2		5460.000	43.09	0.66	43.75	-10.25	54.00	100	358	Average
3		5467.500	43.52	0.70	44.22	N/A	N/A	100	358	Average
4		5470.000	43.02	0.71	43.73	N/A	N/A	100	358	Average
5		5522.900	85.28	0.95	86.23	N/A	N/A	100	358	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

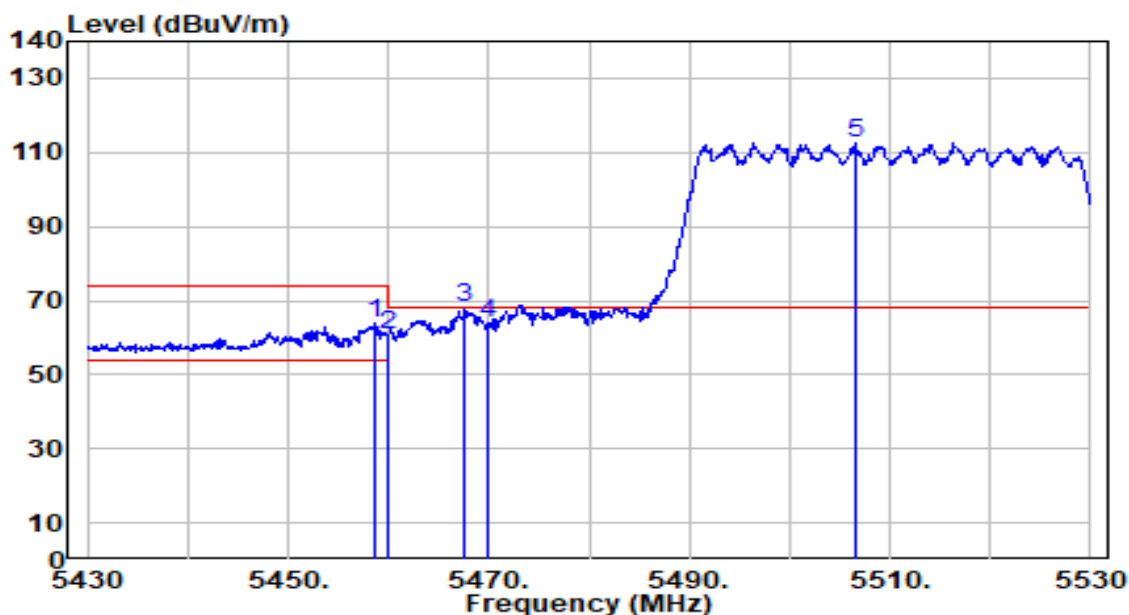


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.700	63.14	0.66	63.79	-10.21	74.00	160	32	Peak
2	5460.000	60.09	0.66	60.76	-13.24	74.00	160	32	Peak
3	* 5467.600	67.29	0.70	67.99	-0.21	68.20	160	32	Peak
4	5470.000	63.00	0.71	63.71	-4.49	68.20	160	32	Peak
5	5506.600	111.86	0.87	112.73	N/A	N/A	160	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

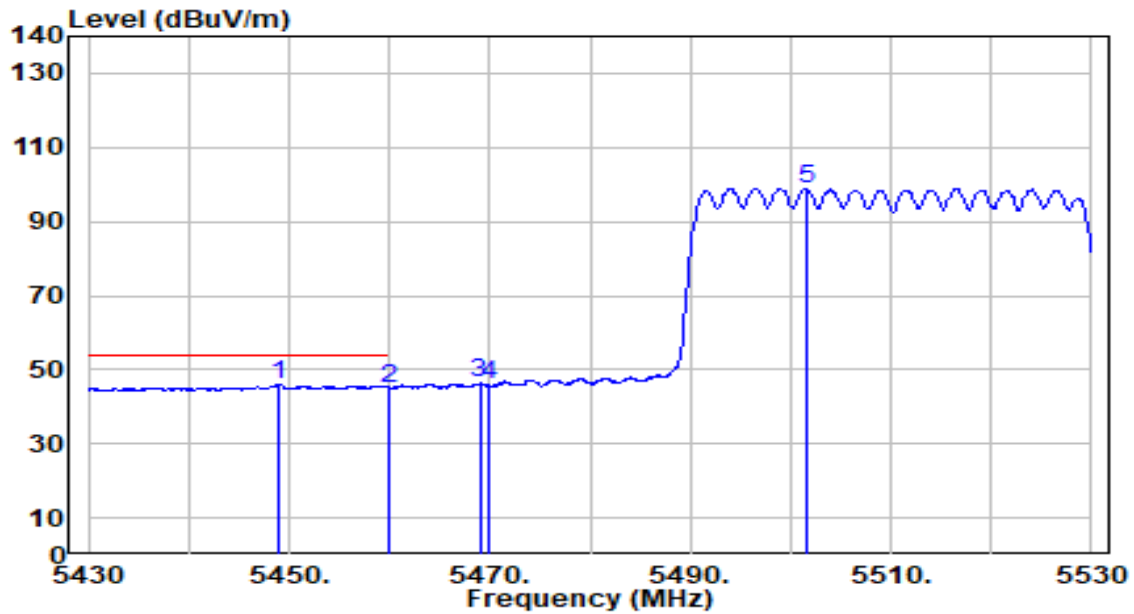


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.000	45.42	0.61	46.03	-7.97	54.00	160	32	Average
2		5460.000	44.42	0.66	45.09	-8.91	54.00	160	32	Average
3		5469.000	45.79	0.70	46.49	N/A	N/A	160	32	Average
4		5470.000	45.05	0.71	45.76	N/A	N/A	160	32	Average
5		5501.500	98.02	0.85	98.87	N/A	N/A	160	32	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

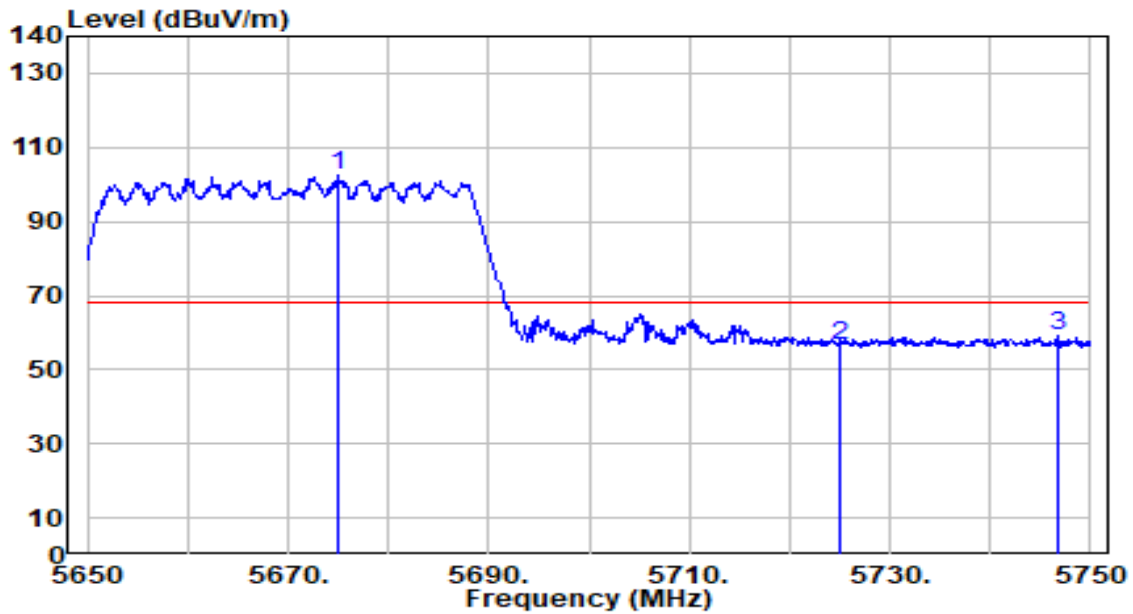


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5674.900	100.87	1.66	102.53	N/A	N/A	130	4	Peak
2	5725.000	54.48	1.89	56.37	-11.83	68.20	130	4	Peak
3	* 5746.800	56.96	2.00	58.95	-9.25	68.20	130	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

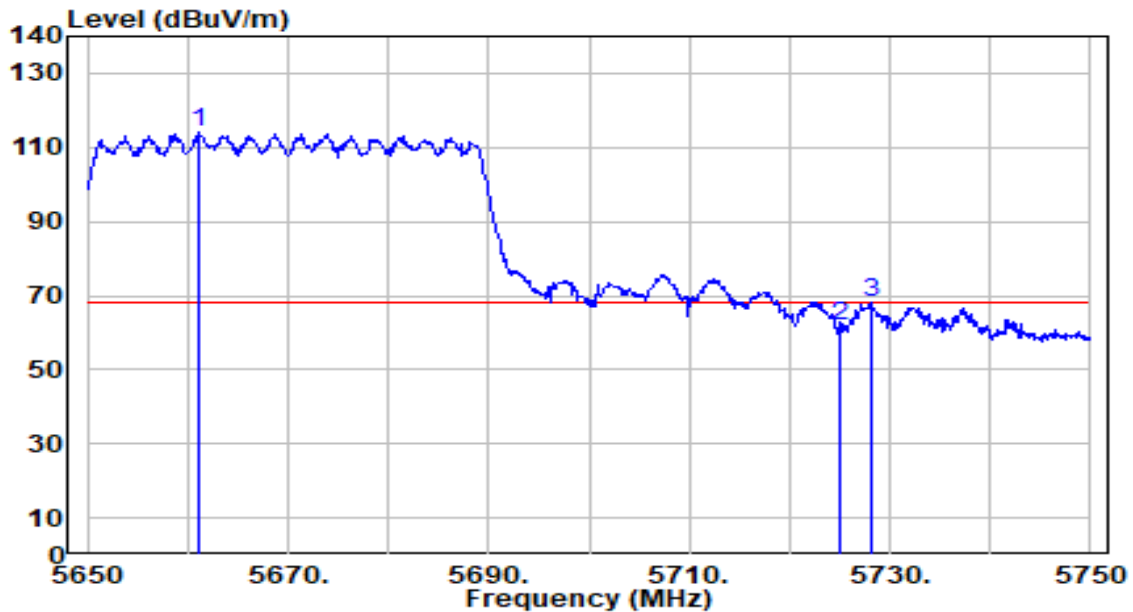


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5661.200	112.68	1.59	114.28	N/A	N/A	200	360	Peak
2	5725.000	59.95	1.89	61.84	-6.36	68.20	200	360	Peak
3	* 5728.100	66.05	1.91	67.96	-0.24	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

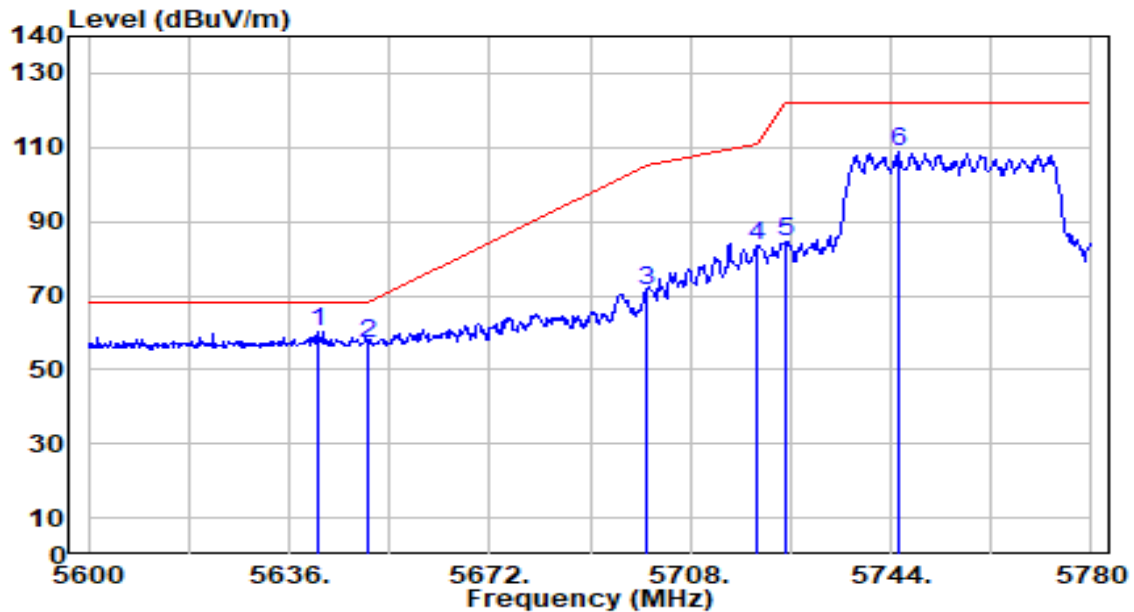


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.400	58.78	1.50	60.28	-7.92	68.20	100	360	Peak
2		5650.000	55.61	1.54	57.15	-11.05	68.20	100	360	Peak
3		5700.000	69.53	1.78	71.31	-33.89	105.20	100	360	Peak
4		5720.000	81.85	1.87	83.72	-27.08	110.80	100	360	Peak
5		5725.000	82.77	1.89	84.67	-37.53	122.20	100	360	Peak
6		5745.440	107.00	1.99	108.99	N/A	N/A	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

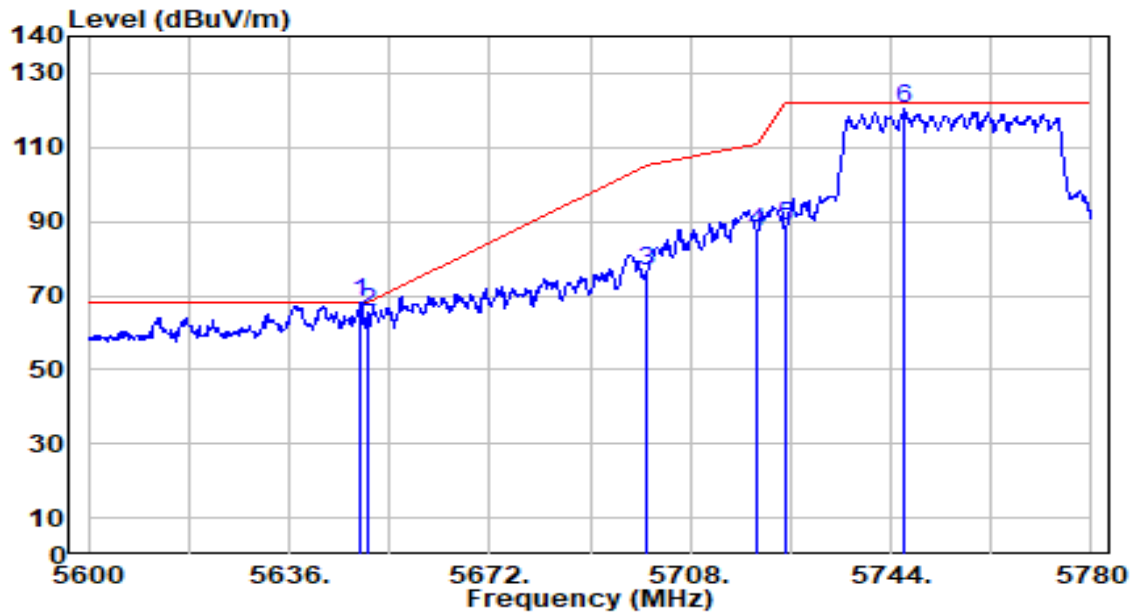


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.960	66.49	1.54	68.03	-0.17	68.20	200	0	Peak
2		5650.000	63.85	1.54	65.39	-2.81	68.20	200	0	Peak
3		5700.000	74.71	1.78	76.49	-28.71	105.20	200	0	Peak
4		5720.000	85.27	1.87	87.14	-23.66	110.80	200	0	Peak
5		5725.000	86.63	1.89	88.52	-33.68	122.20	200	0	Peak
6		5746.520	118.44	1.99	120.43	N/A	N/A	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

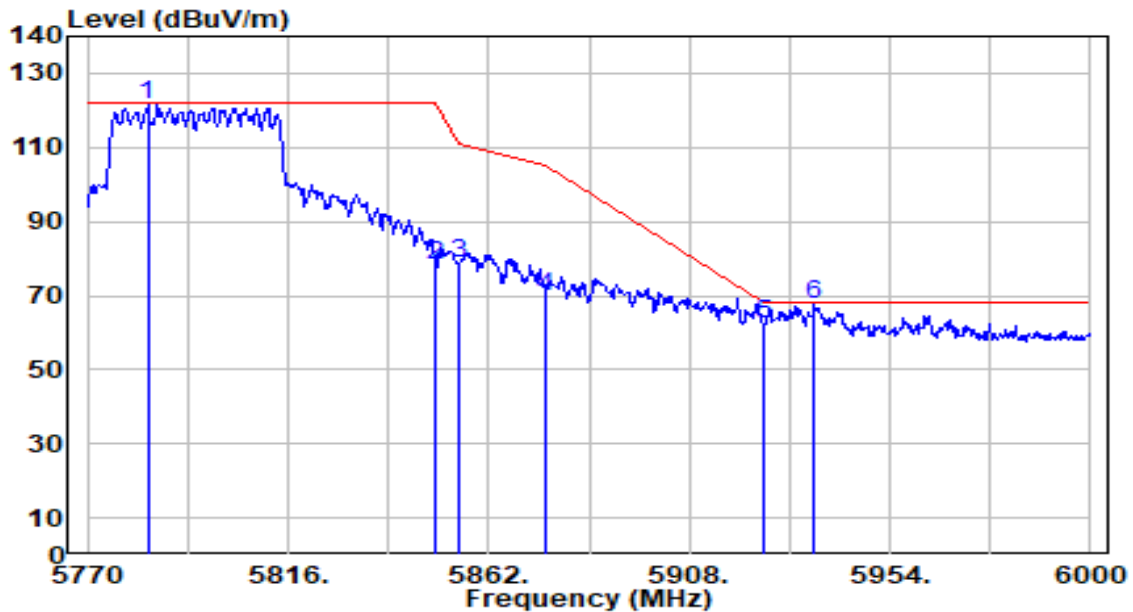


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5783.800	119.43	2.17	121.59	N/A	N/A	200	0	Peak
2	5850.000	75.86	2.25	78.11	-44.09	122.20	200	0	Peak
3	5855.000	76.45	2.25	78.70	-32.10	110.80	200	0	Peak
4	5875.000	67.62	2.26	69.87	-35.33	105.20	200	0	Peak
5	5925.000	59.97	2.27	62.23	-5.97	68.20	200	0	Peak
6	* 5936.750	65.50	2.27	67.77	-0.43	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

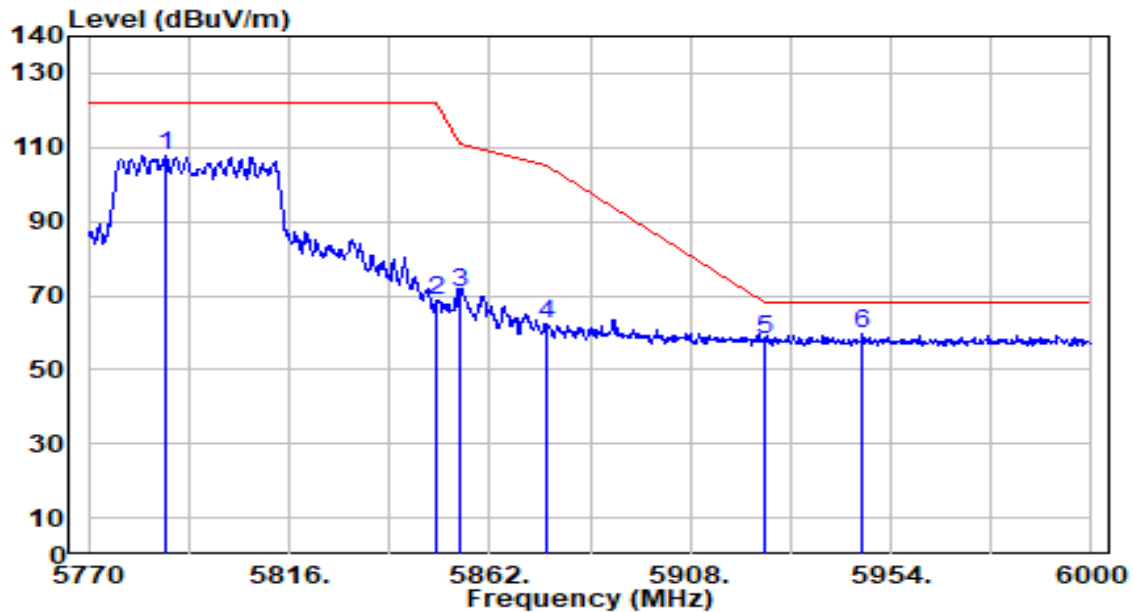


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5787.940	105.45	2.19	107.64	N/A	N/A	100	360	Peak
2	5850.000	66.48	2.25	68.74	-53.46	122.20	100	360	Peak
3	5855.000	68.33	2.25	70.58	-40.22	110.80	100	360	Peak
4	5875.000	60.28	2.26	62.54	-42.66	105.20	100	360	Peak
5	5925.000	55.66	2.27	57.92	-10.28	68.20	100	360	Peak
6	* 5947.560	57.35	2.27	59.62	-8.58	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

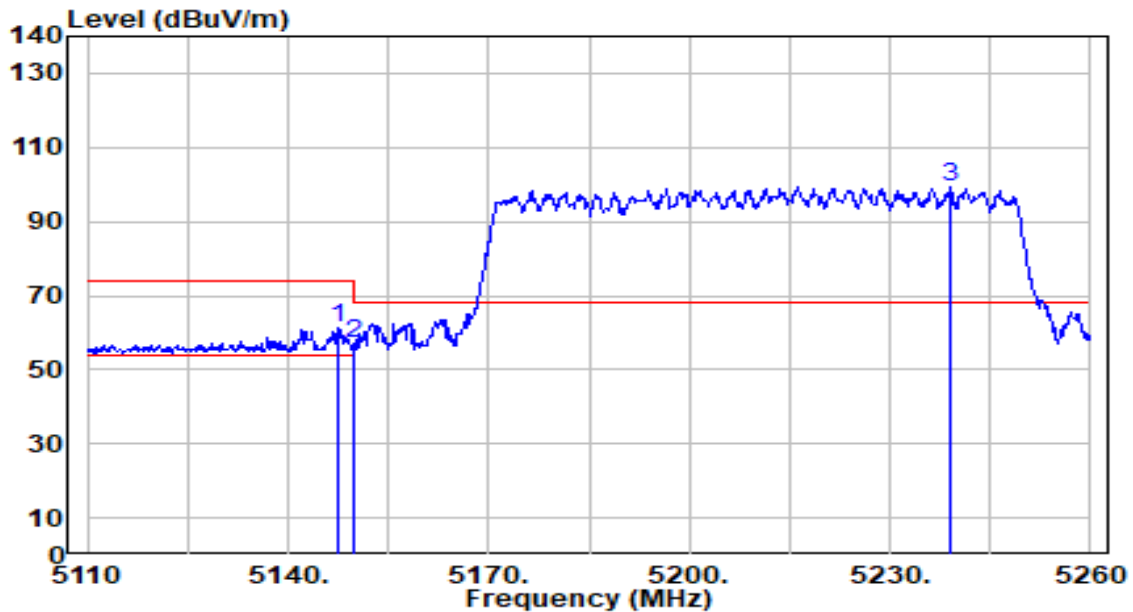


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.350	60.88	0.65	61.53	-12.47	74.00	150	344	Peak
2		5150.000	56.37	0.65	57.02	-16.98	74.00	150	344	Peak
3		5239.150	98.78	0.64	99.42	N/A	N/A	150	344	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

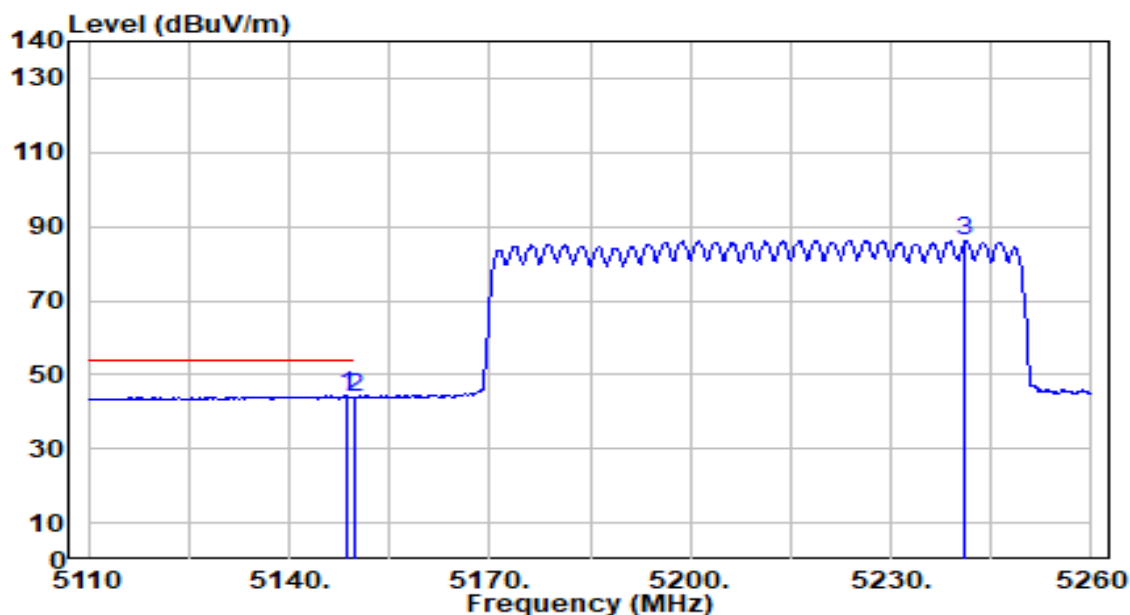


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.550	43.70	0.65	44.35	-9.65	54.00	150	344	Average
2		5150.000	43.22	0.65	43.88	-10.12	54.00	150	344	Average
3		5241.100	85.64	0.64	86.28	N/A	N/A	150	344	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

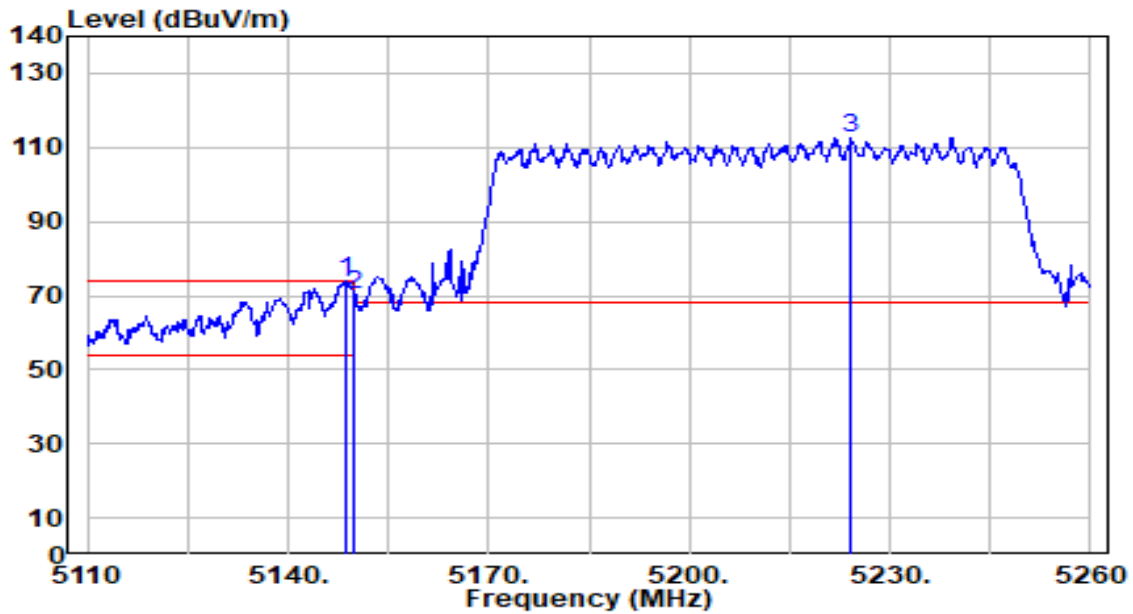


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.550	73.18	0.65	73.83	-0.17	74.00	136	32	Peak
2		5150.000	69.42	0.65	70.08	-3.92	74.00	136	32	Peak
3		5224.150	112.03	0.66	112.70	N/A	N/A	136	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

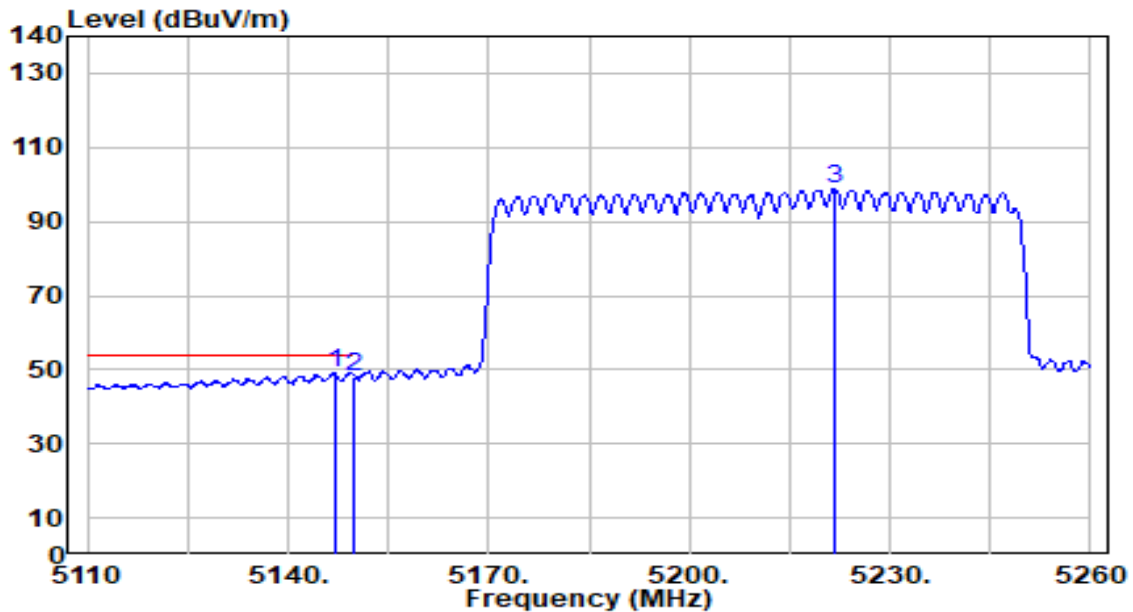


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.050	48.59	0.65	49.24	-4.76	54.00	136	32	Average
2		5150.000	47.45	0.65	48.10	-5.90	54.00	136	32	Average
3		5221.750	98.18	0.67	98.84	N/A	N/A	136	32	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

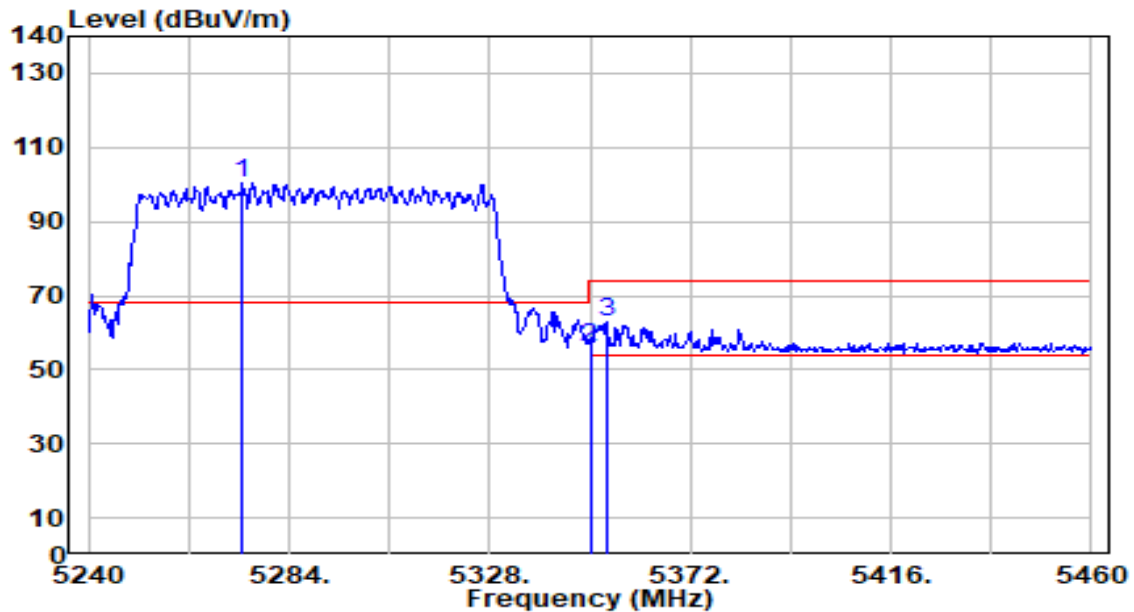


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5273.880	99.55	0.59	100.14	N/A	N/A	150	344	Peak
2	5350.000	55.61	0.47	56.08	-17.92	74.00	150	344	Peak
3	* 5353.520	62.30	0.47	62.76	-11.24	74.00	150	344	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

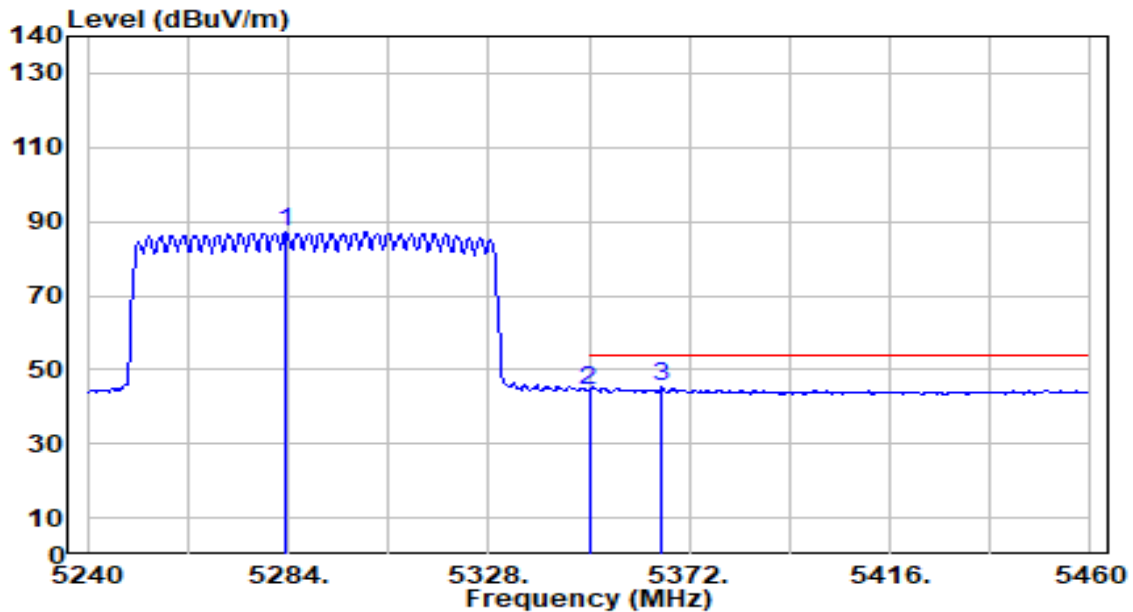


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5283.560	86.49	0.57	87.06	N/A	N/A	150	344	Average
2	5350.000	43.83	0.47	44.30	-9.70	54.00	150	344	Average
3	* 5366.060	44.73	0.45	45.18	-8.82	54.00	150	344	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

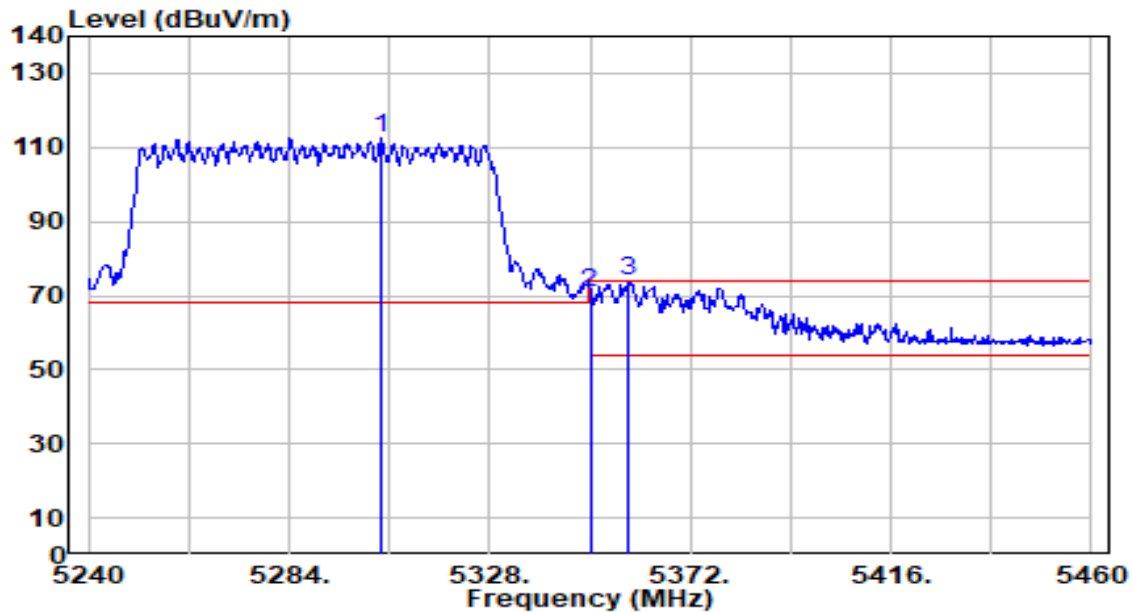


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.240	112.00	0.54	112.54	N/A	N/A	136	27	Peak
2	5350.000	70.41	0.47	70.88	-3.12	74.00	136	27	Peak
3	* 5358.580	73.35	0.46	73.81	-0.19	74.00	136	27	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

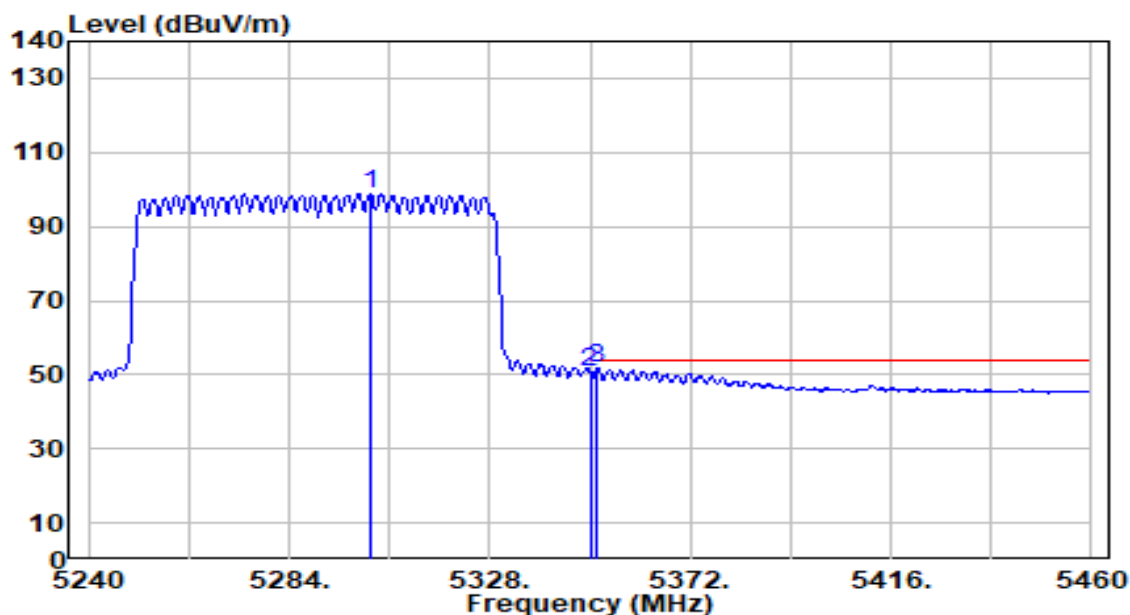


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.820	98.43	0.55	98.98	N/A	N/A	136	27	Average
2	5350.000	50.03	0.47	50.50	-3.50	54.00	136	27	Average
3	* 5351.540	51.12	0.47	51.58	-2.42	54.00	136	27	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

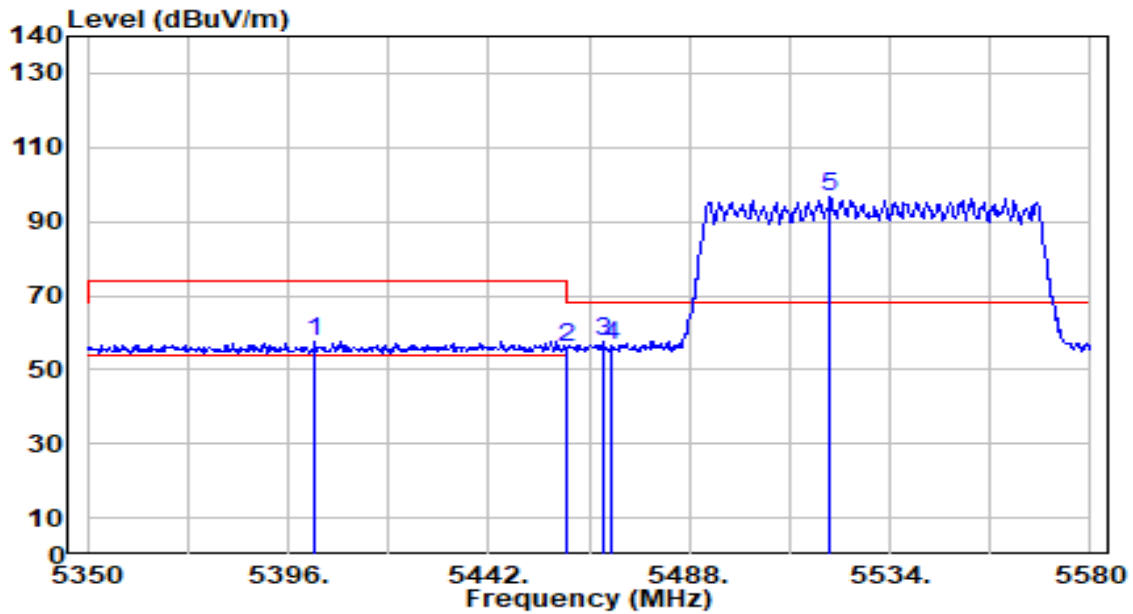


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5402.210	57.20	0.40	57.60	-16.40	74.00	100	0	Peak
2	5460.000	55.19	0.66	55.86	-18.14	74.00	100	0	Peak
3	* 5468.220	56.94	0.70	57.64	-10.56	68.20	100	0	Peak
4	5470.000	56.09	0.71	56.79	-11.41	68.20	100	0	Peak
5	5520.430	95.49	0.94	96.43	N/A	N/A	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

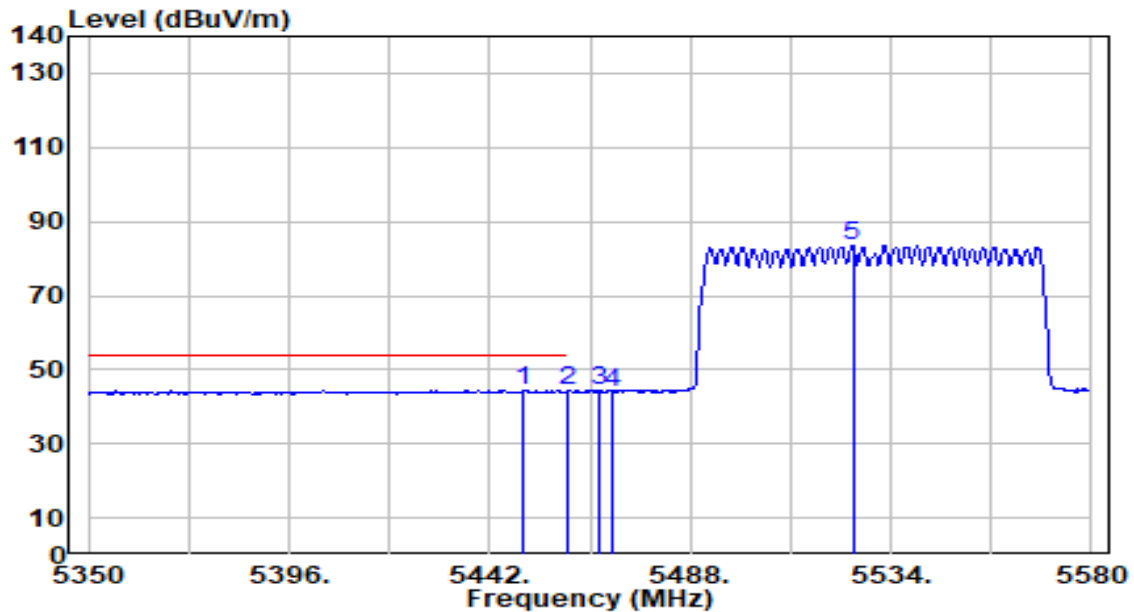


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5449.820	43.73	0.62	44.34	-9.66	54.00	100	0	Average
2	*	5460.000	43.91	0.66	44.57	-9.43	54.00	100	0	Average
3		5466.840	43.87	0.69	44.57	N/A	N/A	100	0	Average
4		5470.000	43.29	0.71	43.99	N/A	N/A	100	0	Average
5		5525.260	82.50	0.96	83.46	N/A	N/A	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

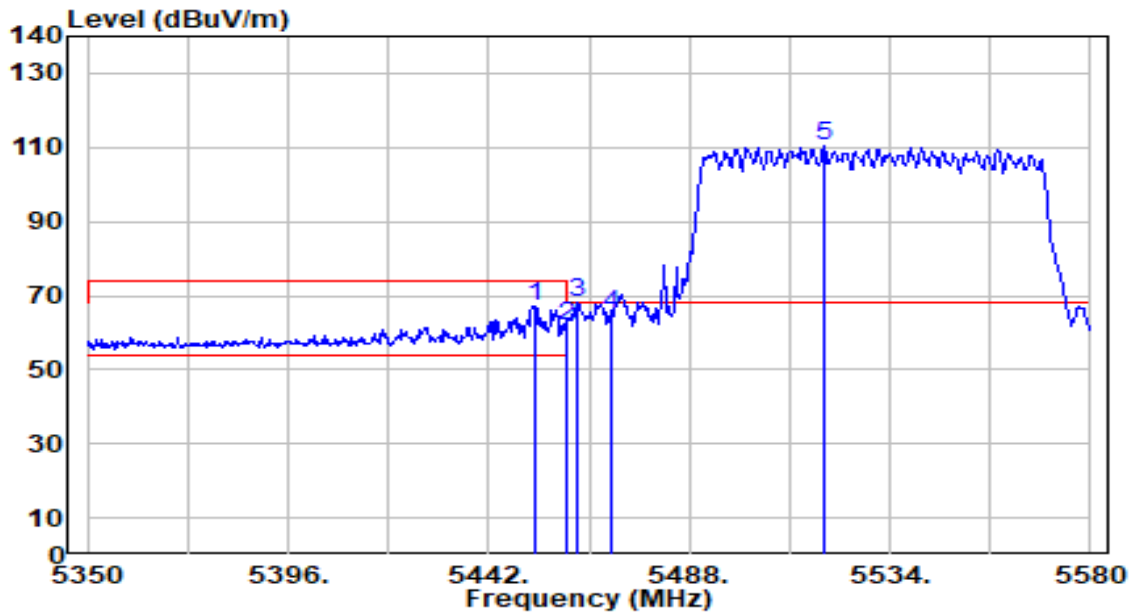


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.810	66.29	0.63	66.92	-7.08	74.00	160	360	Peak
2	5460.000	61.09	0.66	61.75	-12.25	74.00	160	360	Peak
3	* 5462.470	67.34	0.67	68.01	-0.19	68.20	160	360	Peak
4	5470.000	64.53	0.71	65.24	-2.96	68.20	160	360	Peak
5	5519.050	109.36	0.93	110.29	N/A	N/A	160	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

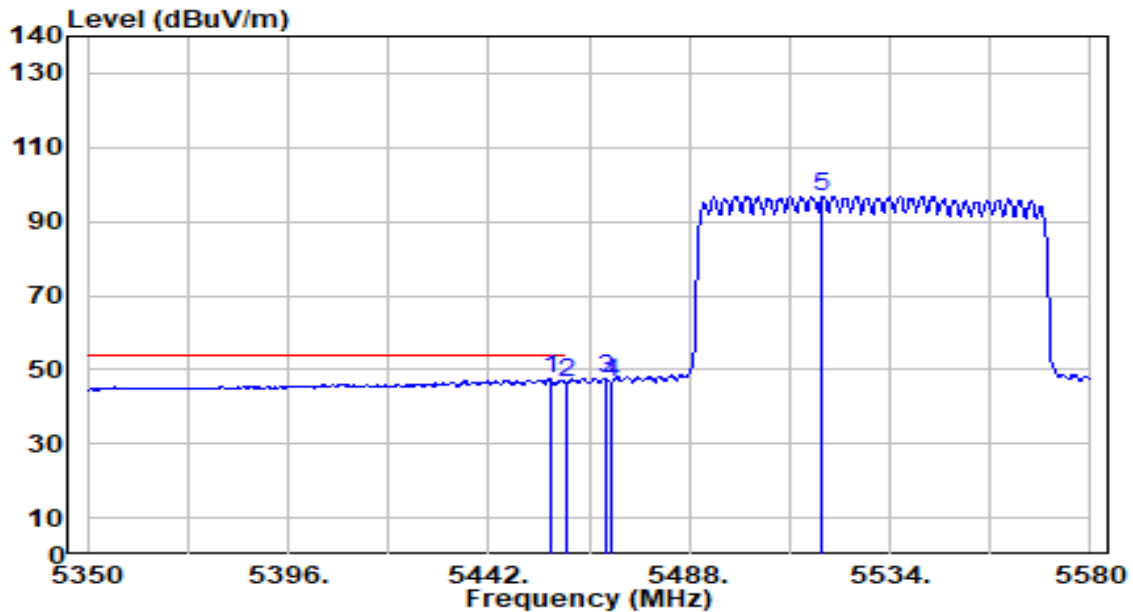


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.030	46.84	0.64	47.48	-6.52	54.00	160	360	Average
2		5460.000	45.96	0.66	46.63	-7.37	54.00	160	360	Average
3		5468.910	46.95	0.70	47.65	N/A	N/A	160	360	Average
4		5470.000	45.91	0.71	46.61	N/A	N/A	160	360	Average
5		5518.590	95.94	0.93	96.87	N/A	N/A	160	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

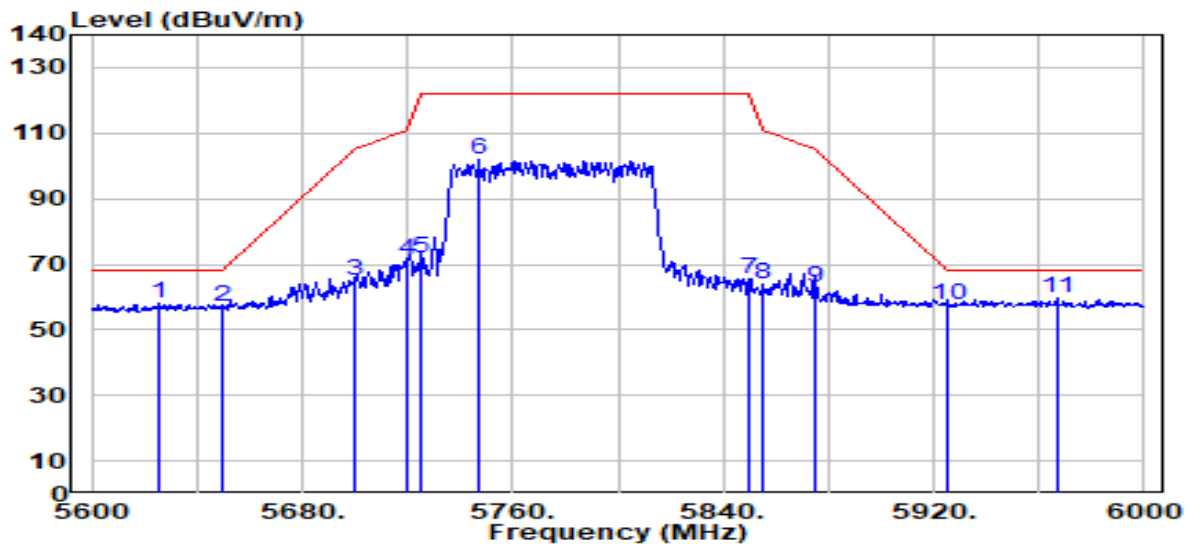


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5626.000	56.48	1.43	57.91	-10.29	68.20	130	0	Peak
2	5650.000	55.47	1.54	57.01	-11.19	68.20	130	0	Peak
3	5700.000	63.05	1.78	64.82	-40.38	105.20	130	0	Peak
4	5720.000	69.71	1.87	71.58	-39.22	110.80	130	0	Peak
5	5725.000	69.99	1.89	71.88	-50.32	122.20	130	0	Peak
6	5747.200	99.73	2.00	101.73	N/A	N/A	130	0	Peak
7	5850.000	63.08	2.25	65.33	-56.87	122.20	130	0	Peak
8	5855.000	61.41	2.25	63.67	-47.13	110.80	130	0	Peak
9	5875.000	60.48	2.26	62.74	-42.46	105.20	130	0	Peak
10	5925.000	55.45	2.27	57.71	-10.49	68.20	130	0	Peak
11	* 5966.800	57.58	2.27	59.85	-8.35	68.20	130	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-29
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

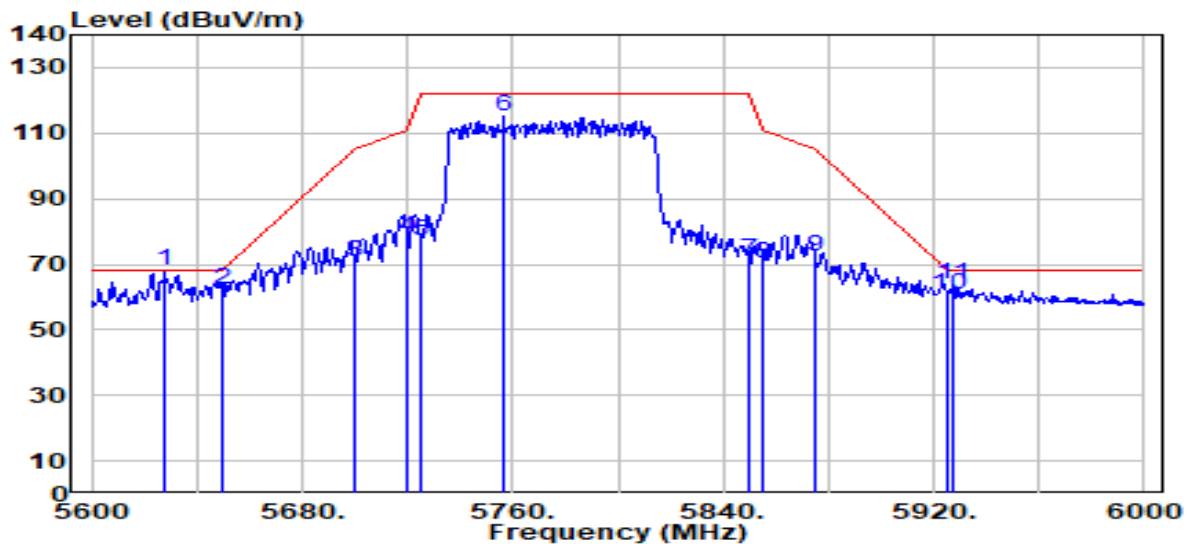


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5627.600	66.53	1.44	67.97	-0.23	68.20	200	356	Peak
2		5650.000	60.64	1.54	62.19	-6.01	68.20	200	356	Peak
3		5700.000	69.03	1.78	70.80	-34.40	105.20	200	356	Peak
4		5720.000	76.51	1.87	78.38	-32.42	110.80	200	356	Peak
5		5725.000	75.12	1.89	77.02	-45.18	122.20	200	356	Peak
6		5756.400	112.88	2.04	114.92	N/A	N/A	200	356	Peak
7		5850.000	69.12	2.25	71.38	-50.82	122.20	200	356	Peak
8		5855.000	68.19	2.25	70.44	-40.36	110.80	200	356	Peak
9		5875.000	70.23	2.26	72.49	-32.71	105.20	200	356	Peak
10		5925.000	58.47	2.27	60.74	-7.46	68.20	200	356	Peak
11		5927.200	61.82	2.27	64.09	-4.11	68.20	200	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

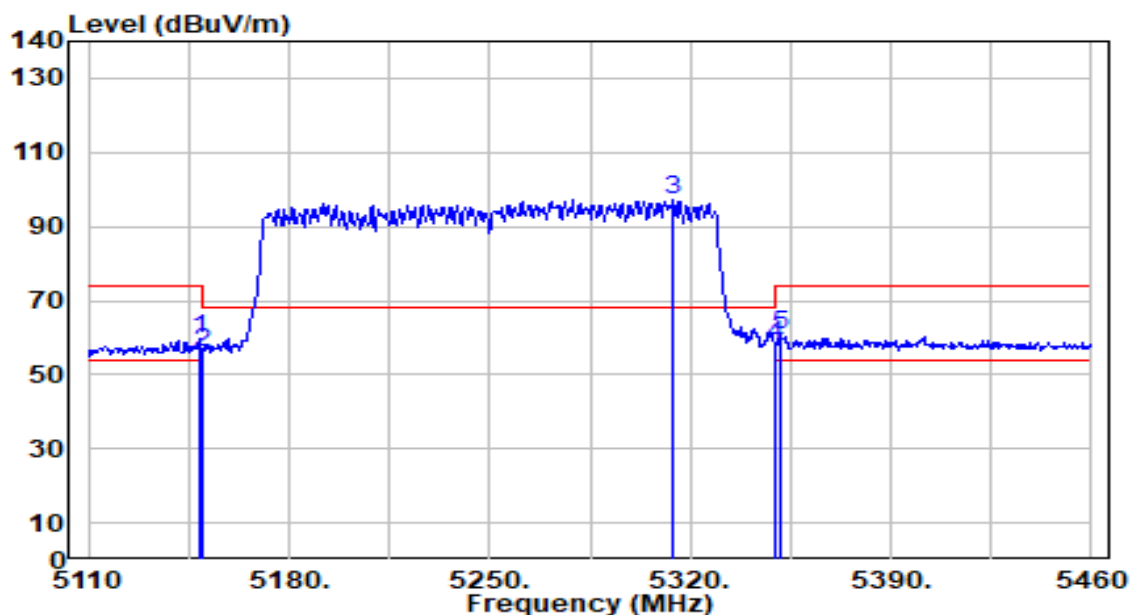


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.850	58.90	0.65	59.55	-14.45	74.00	150	20	Peak
2	5150.000	55.35	0.65	56.00	-18.00	74.00	150	20	Peak
3	5314.050	96.84	0.53	97.36	N/A	N/A	150	20	Peak
4	5350.000	57.60	0.47	58.07	-15.93	74.00	150	20	Peak
5	* 5351.500	60.04	0.47	60.51	-13.49	74.00	150	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

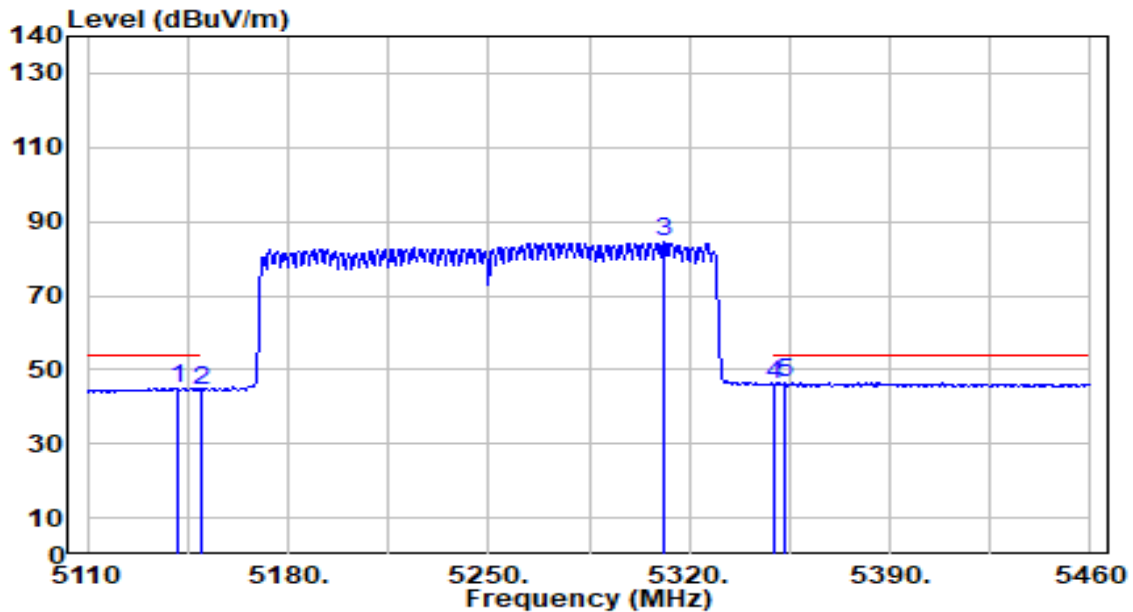


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5141.500	44.37	0.65	45.02	-8.98	54.00	150	20	Average
2	5150.000	43.64	0.65	44.29	-9.71	54.00	150	20	Average
3	5311.250	83.89	0.53	84.43	N/A	N/A	150	20	Average
4	5350.000	45.40	0.47	45.88	-8.12	54.00	150	20	Average
5	* 5353.600	46.05	0.47	46.51	-7.49	54.00	150	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

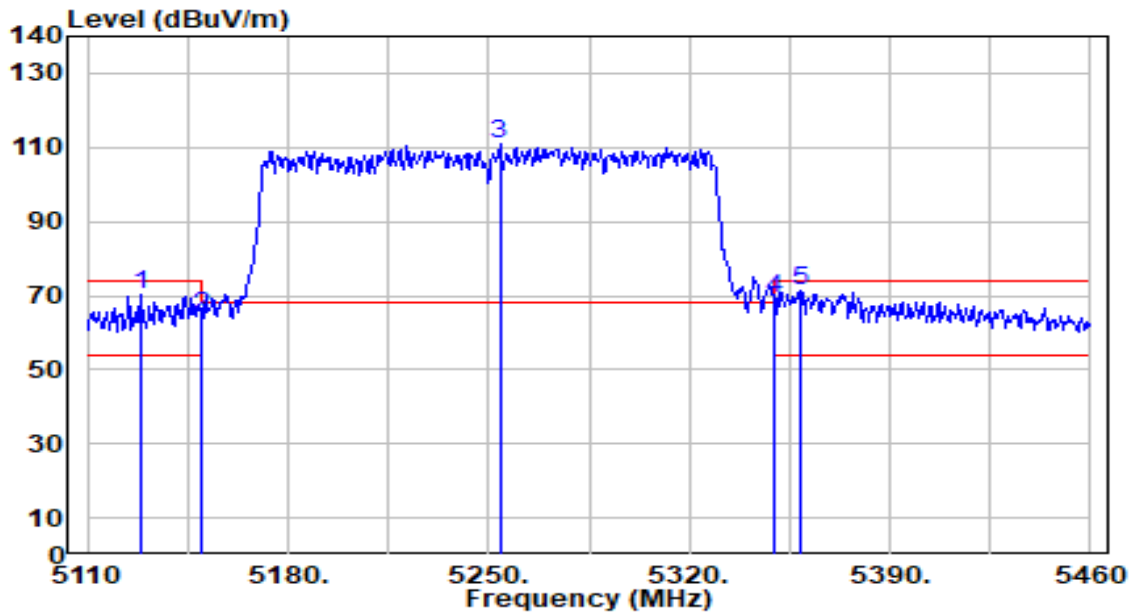


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5128.550	69.66	0.63	70.30	-3.70	74.00	136	356	Peak
2	5150.000	64.03	0.65	64.68	-9.32	74.00	136	356	Peak
3	5253.850	110.17	0.62	110.79	N/A	N/A	136	356	Peak
4	5350.000	68.57	0.47	69.04	-4.96	74.00	136	356	Peak
5	* 5358.500	70.75	0.46	71.21	-2.79	74.00	136	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

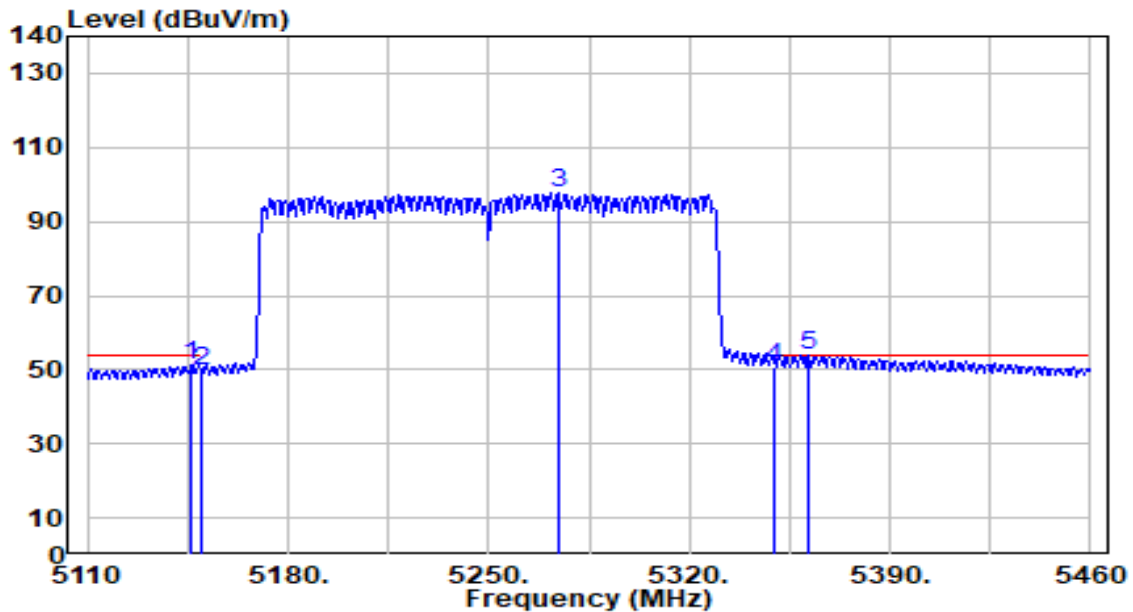


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.400	50.54	0.65	51.19	-2.81	54.00	136	356	Average
2	5150.000	48.75	0.65	49.41	-4.59	54.00	136	356	Average
3	5274.150	96.94	0.59	97.53	N/A	N/A	136	356	Average
4	5350.000	50.46	0.47	50.94	-3.06	54.00	136	356	Average
5	* 5361.650	53.39	0.45	53.85	-0.15	54.00	136	356	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

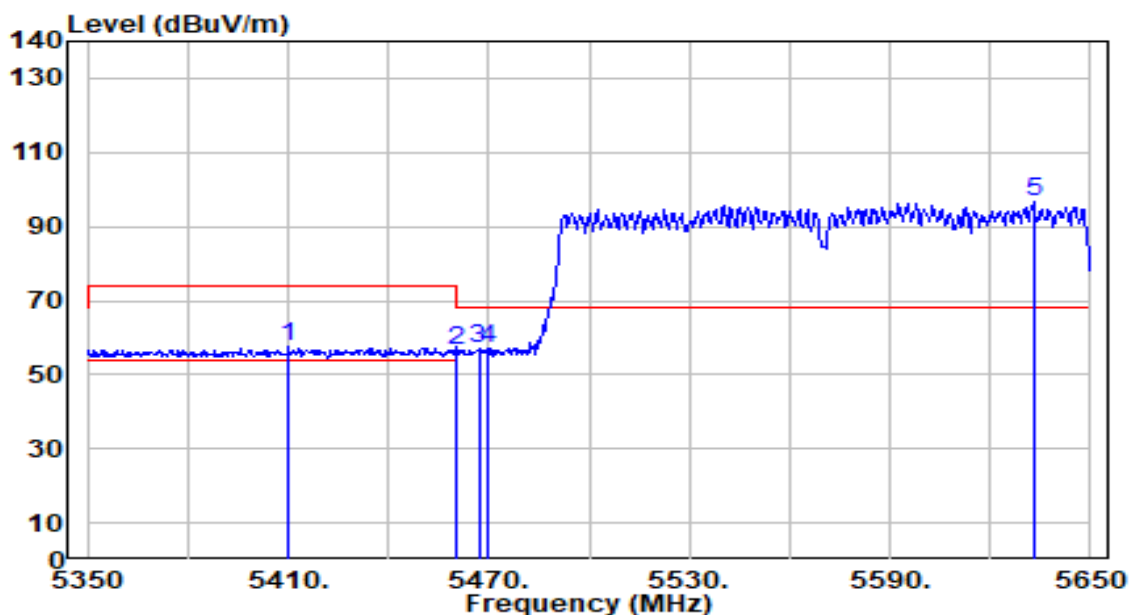


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5410.000	57.11	0.44	57.55	-16.45	74.00	100	0	Peak
2	5460.000	55.89	0.66	56.55	-17.45	74.00	100	0	Peak
3	5467.000	56.26	0.69	56.95	-11.25	68.20	100	0	Peak
4	* 5470.000	56.31	0.71	57.02	-11.18	68.20	100	0	Peak
5	5633.200	95.03	1.46	96.49	N/A	N/A	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

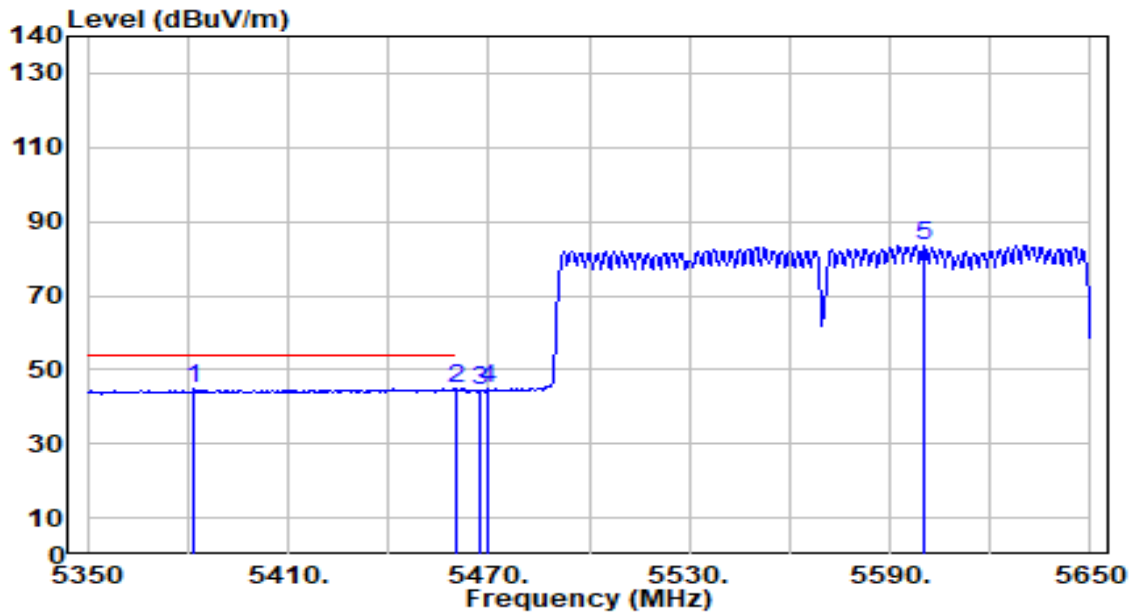


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5382.100	44.30	0.42	44.72	-9.28	54.00	100	0	Average
2	*	5460.000	44.09	0.66	44.75	-9.25	54.00	100	0	Average
3		5467.600	43.93	0.70	44.62	N/A	N/A	100	0	Average
4		5470.000	43.96	0.71	44.67	N/A	N/A	100	0	Average
5		5600.500	82.09	1.31	83.40	N/A	N/A	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

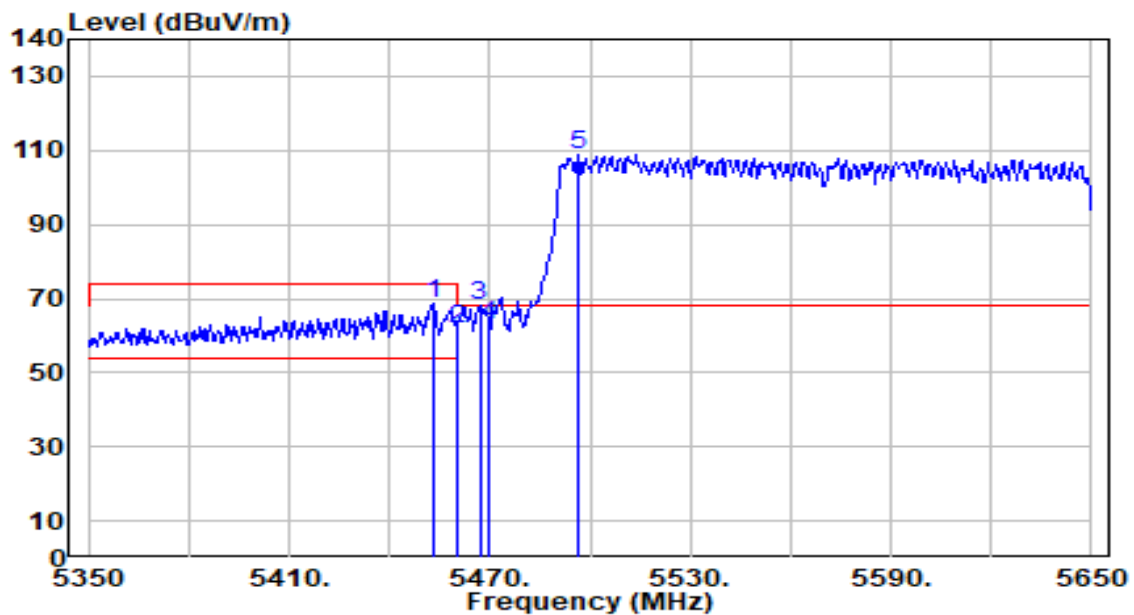


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.900	68.12	0.63	68.75	-5.25	74.00	160	357	Peak
2	5460.000	61.38	0.66	62.04	-11.96	74.00	160	357	Peak
3	* 5467.000	67.38	0.69	68.07	-0.13	68.20	160	357	Peak
4	5470.000	62.30	0.71	63.00	-5.20	68.20	160	357	Peak
5	5496.400	108.05	0.82	108.88	N/A	N/A	160	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-31
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

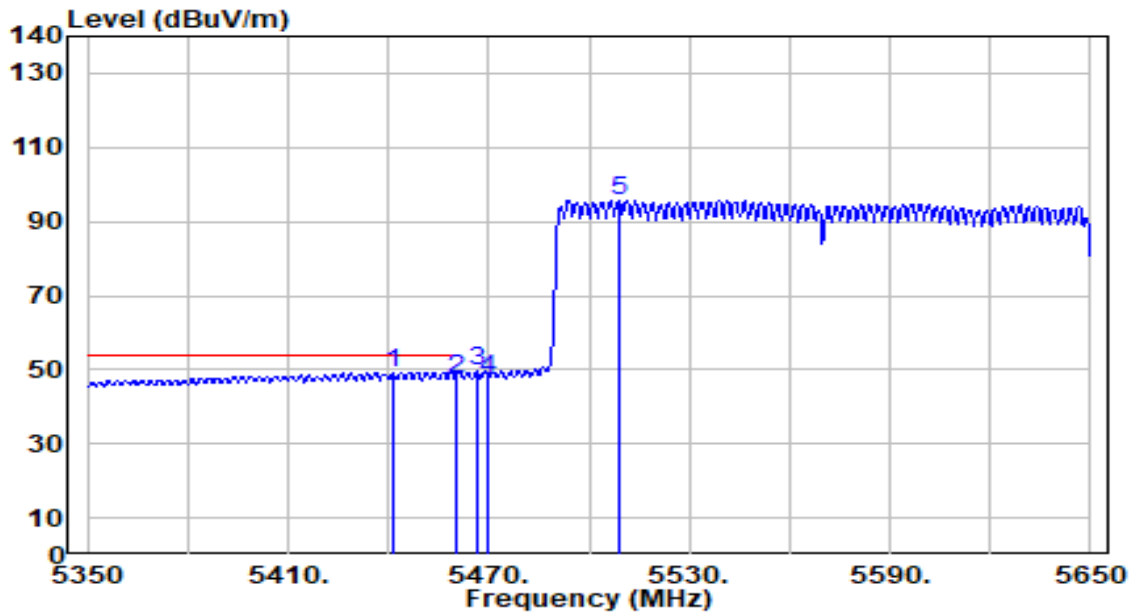

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5441.200	48.78	0.58	49.35	-4.65	54.00	160	357	Average
2		5460.000	46.80	0.66	47.46	-6.54	54.00	160	357	Average
3		5466.400	49.01	0.69	49.70	N/A	N/A	160	357	Average
4		5470.000	47.01	0.71	47.71	N/A	N/A	160	357	Average
5		5509.000	94.91	0.88	95.79	N/A	N/A	160	357	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

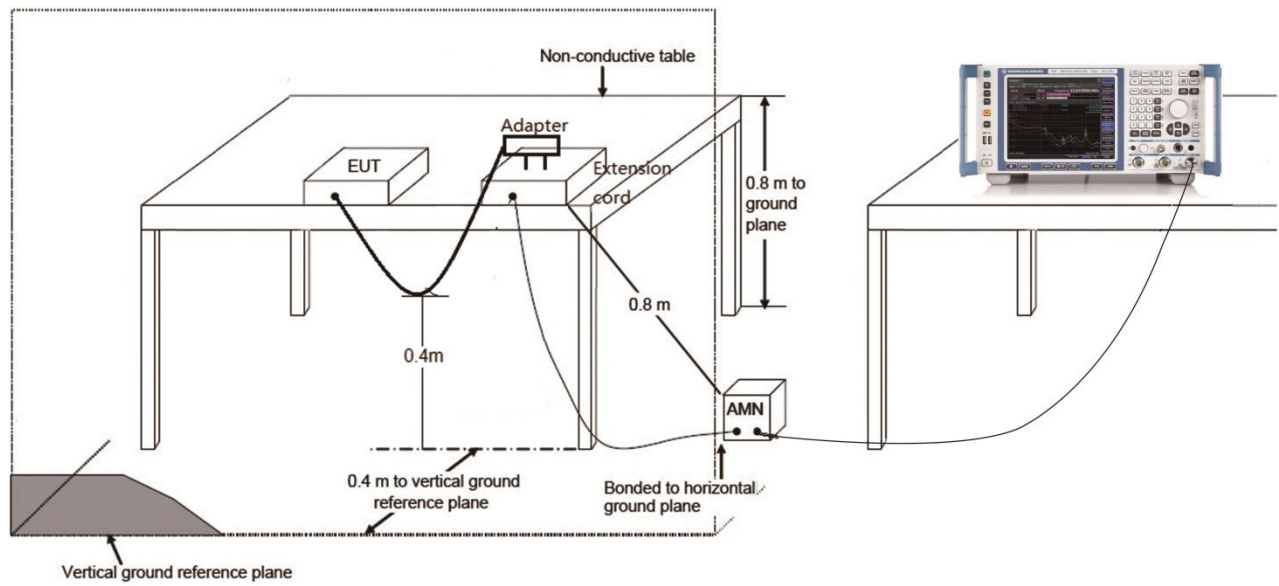

7.10.4.Test Result

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	19.6°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

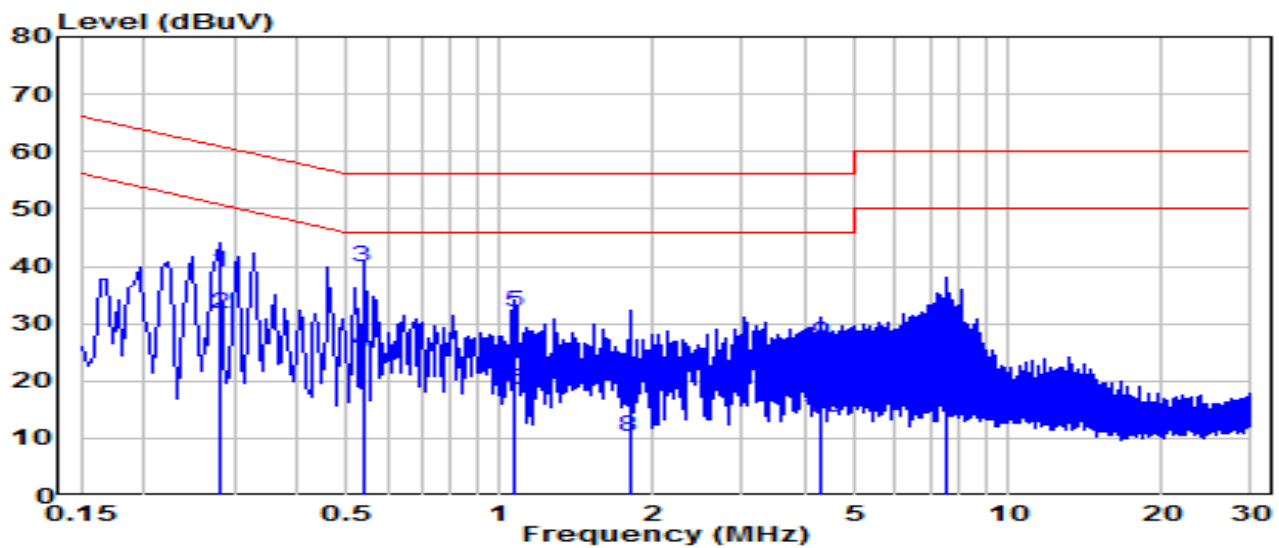


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.280	29.37	9.64	39.01	-21.80	60.80	QP
2	0.280	22.02	9.64	31.65	-19.15	50.80	Average
3	* 0.537	30.27	9.65	39.92	-16.08	56.00	QP
4	* 0.537	15.33	9.65	24.99	-21.01	46.00	Average
5	1.063	22.21	9.68	31.89	-24.11	56.00	QP
6	1.063	8.69	9.68	18.37	-27.63	46.00	Average
7	1.797	9.08	9.70	18.77	-37.23	56.00	QP
8	1.797	0.49	9.70	10.19	-35.81	46.00	Average
9	4.272	16.71	9.73	26.45	-29.55	56.00	QP
10	4.272	3.99	9.73	13.73	-32.27	46.00	Average
11	7.529	19.78	9.81	29.58	-30.42	60.00	QP
12	7.529	5.28	9.81	15.09	-34.91	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).

3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE3600 Wi-Fi 7 Range Extender, BE3200 Wi-Fi 7 Range Extender	Date of Test	2024-12-20
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	19.6°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

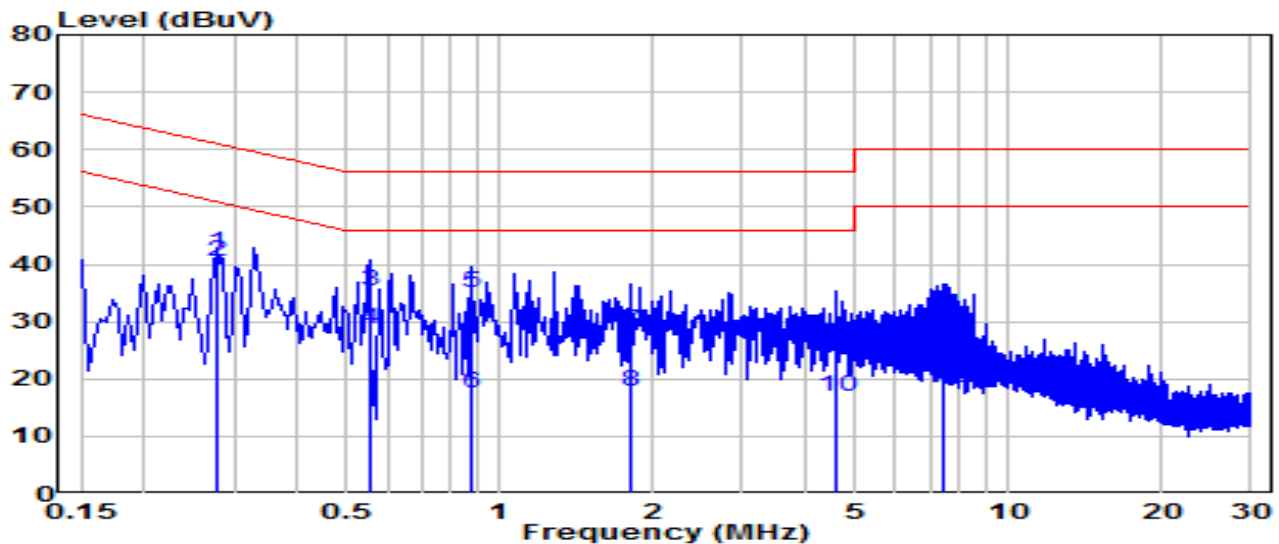

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.276	32.23	9.64	41.87	-19.07	60.94	QP
2	*	0.276	30.72	9.64	40.36	-10.58	50.94	Average
3		0.555	25.66	9.65	35.32	-20.68	56.00	QP
4		0.555	18.95	9.65	28.61	-17.39	46.00	Average
5		0.879	25.33	9.67	35.00	-21.00	56.00	QP
6		0.879	7.74	9.67	17.41	-28.59	46.00	Average
7		1.819	18.57	9.70	28.27	-27.73	56.00	QP
8		1.819	8.18	9.70	17.89	-28.11	46.00	Average
9		4.605	15.13	9.75	24.88	-31.12	56.00	QP
10		4.605	7.29	9.75	17.04	-28.96	46.00	Average
11		7.453	21.33	9.82	31.15	-28.85	60.00	QP
12		7.453	8.50	9.82	18.33	-31.67	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2412TW0110-UT” file.

Appendix B : EUT Photograph

Refer to “2412TW0110-UE” file.

Appendix C : Internal Photograph

Refer to “2412TW0110-UI” file.

_____ The End _____