


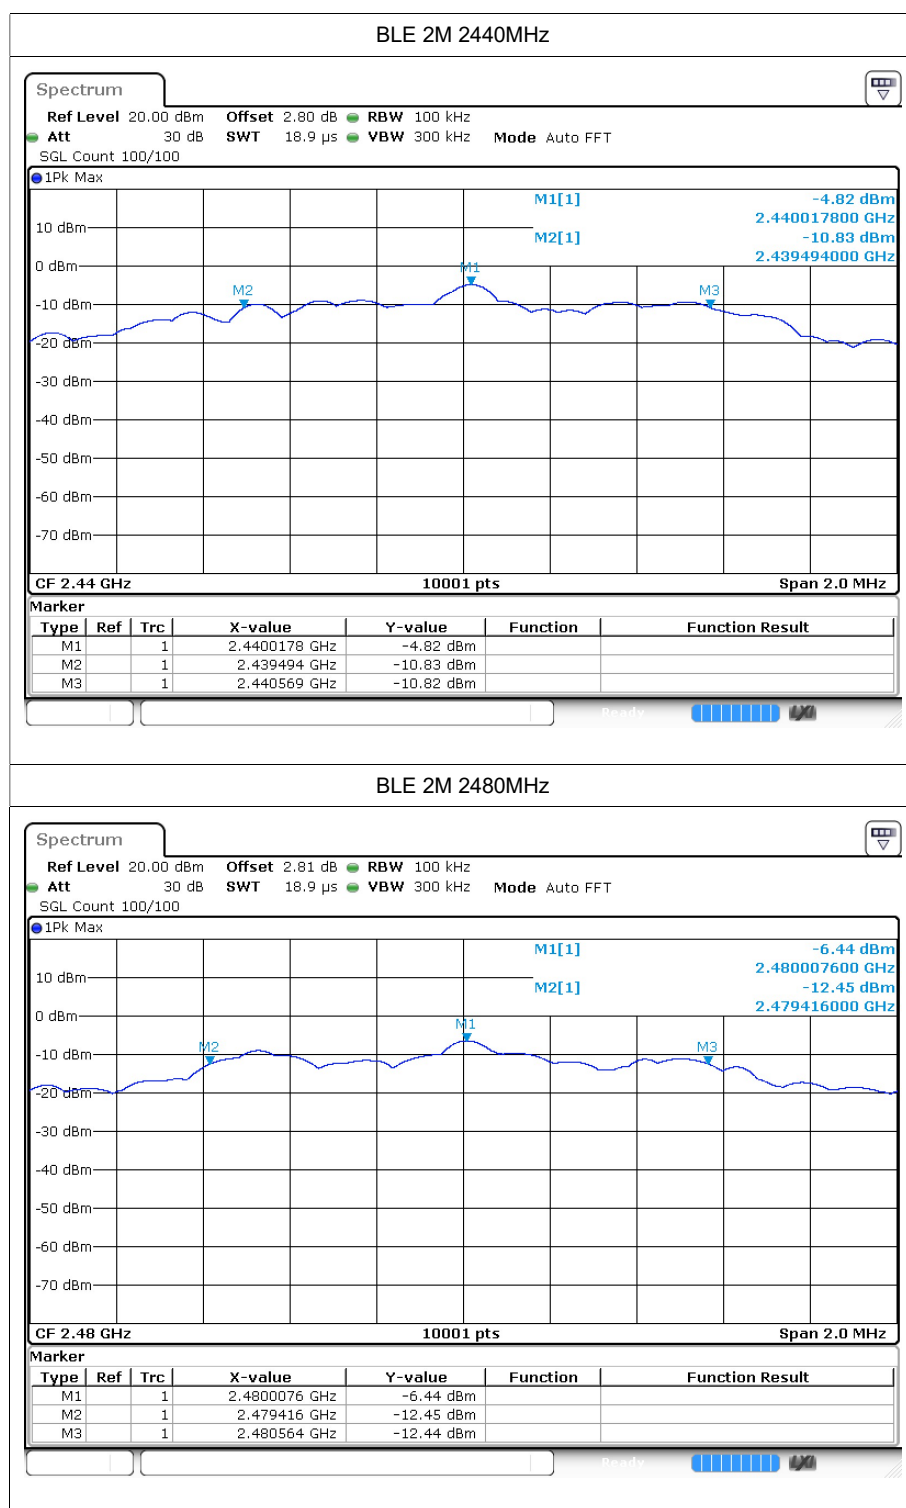



4 Maximum Power Spectral Density Level


4.1 Test Result

Mode	Frequency (MHz)	Conducted PSD (dBm/3-100kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	-19.3	≤ 8	Pass
BLE 1M	2440	-19.84	≤ 8	Pass
BLE 1M	2480	-20.48	≤ 8	Pass
BLE 2M	2402	-22.07	≤ 8	Pass
BLE 2M	2440	-22.47	≤ 8	Pass
BLE 2M	2480	-23.16	≤ 8	Pass

4.2 Test Graphs

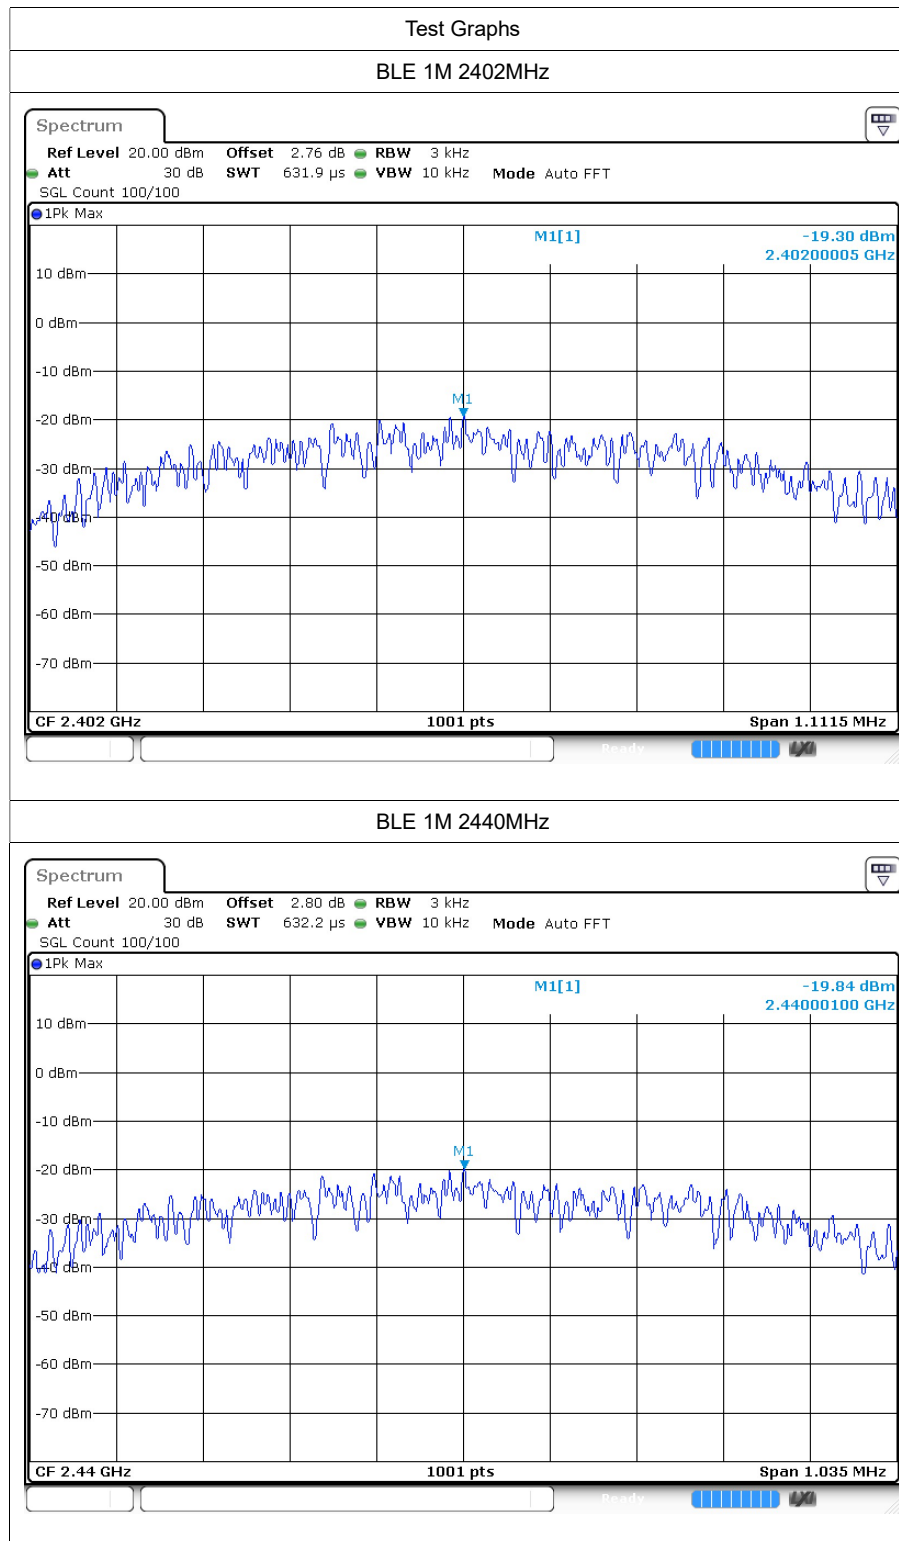

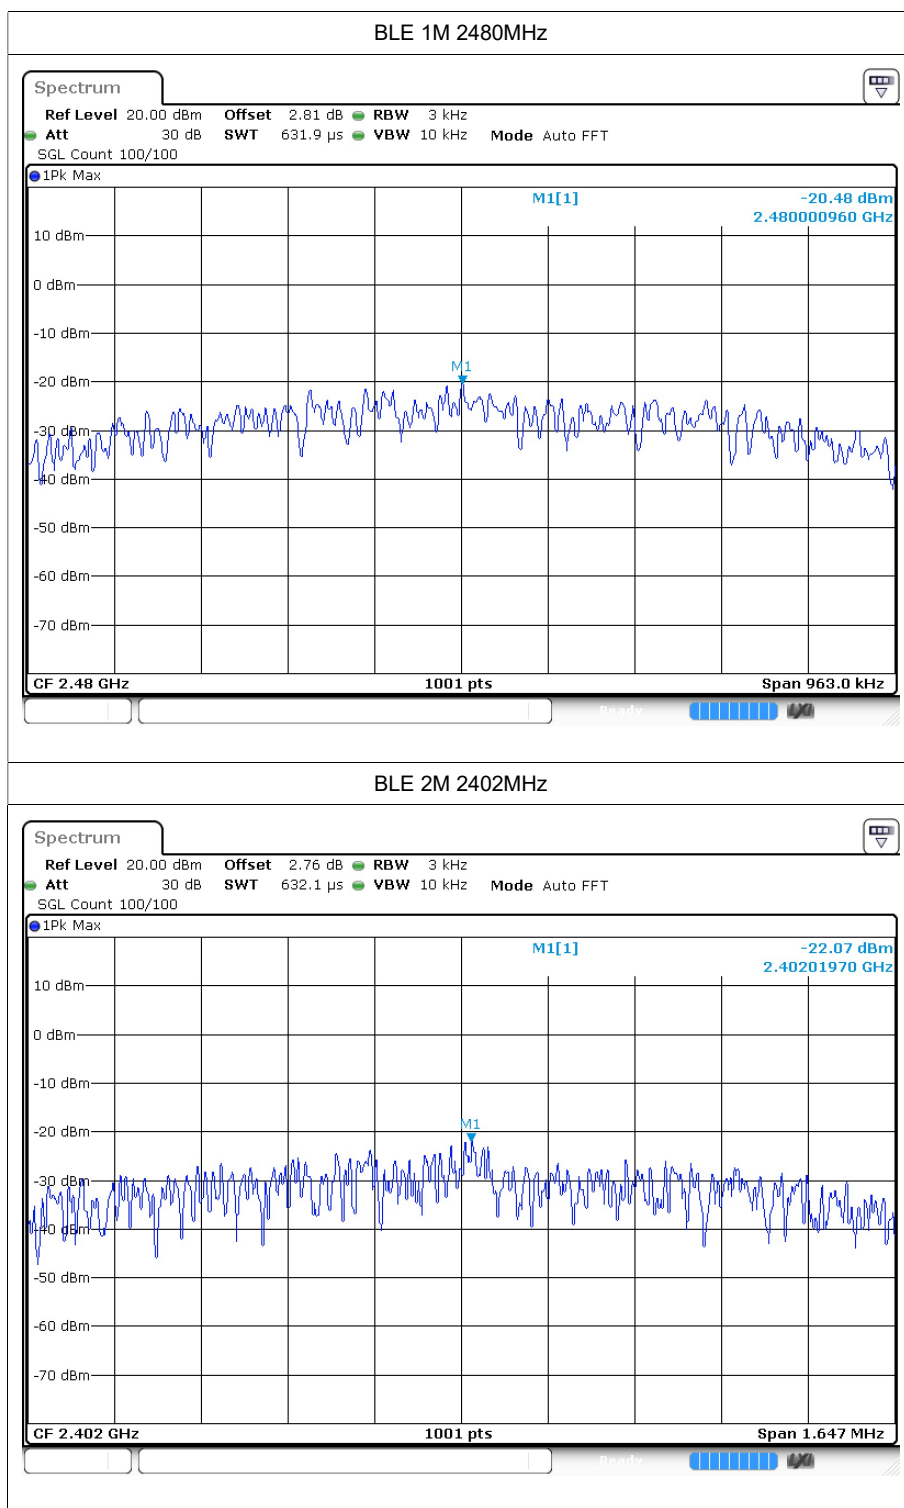

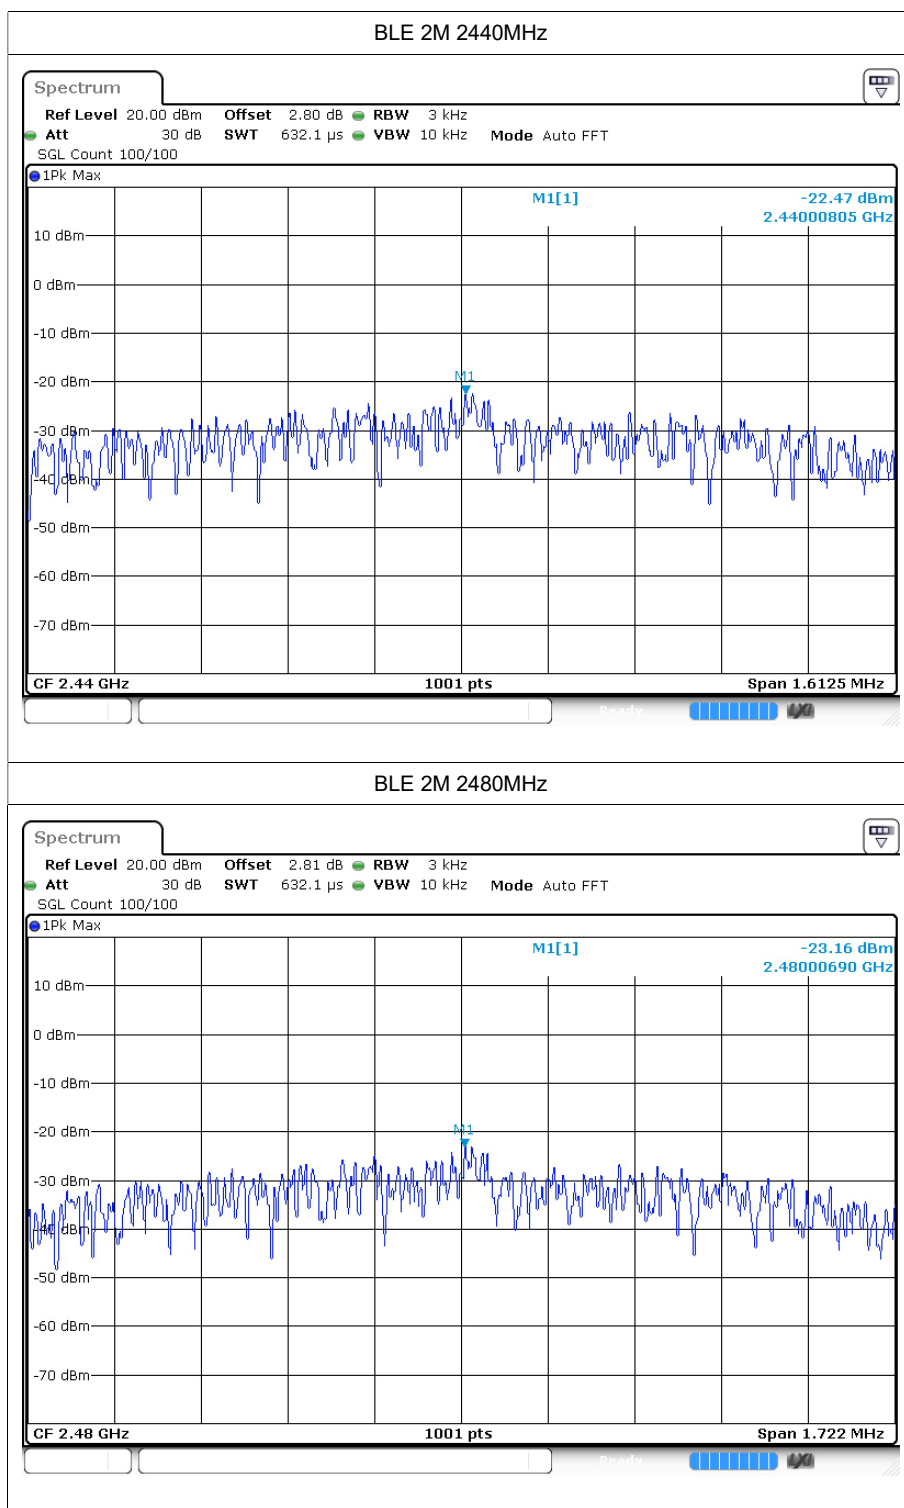





5 Band Edge


5.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-42.99	-20	Pass
BLE 1M	2480	-47.92	-20	Pass
BLE 2M	2402	-47.1	-20	Pass
BLE 2M	2480	-48.02	-20	Pass

5.2 Test Graphs

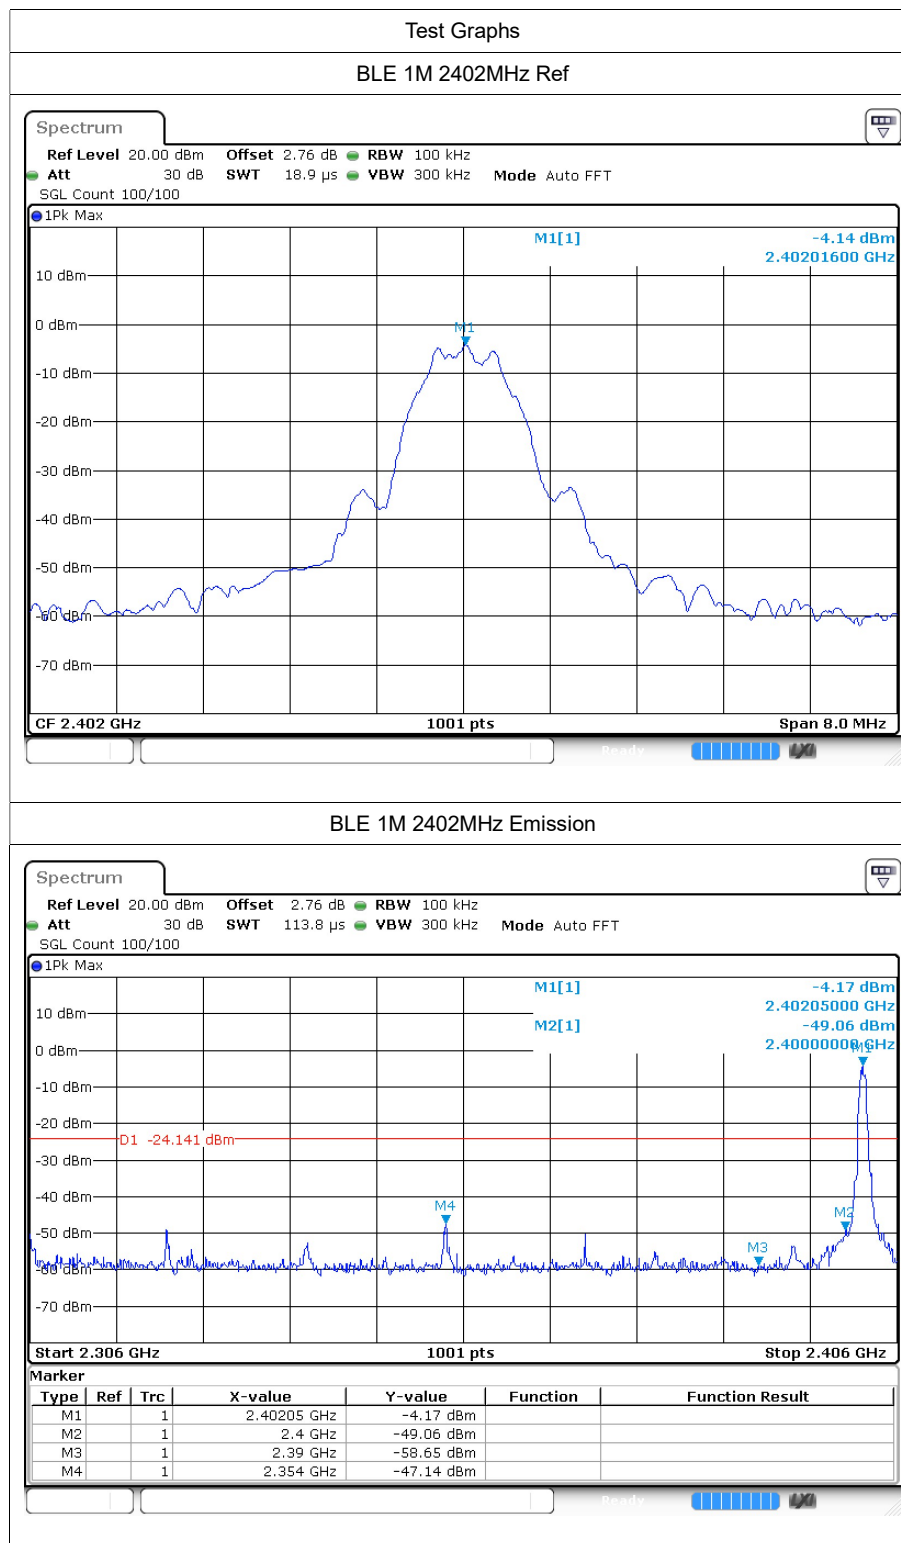

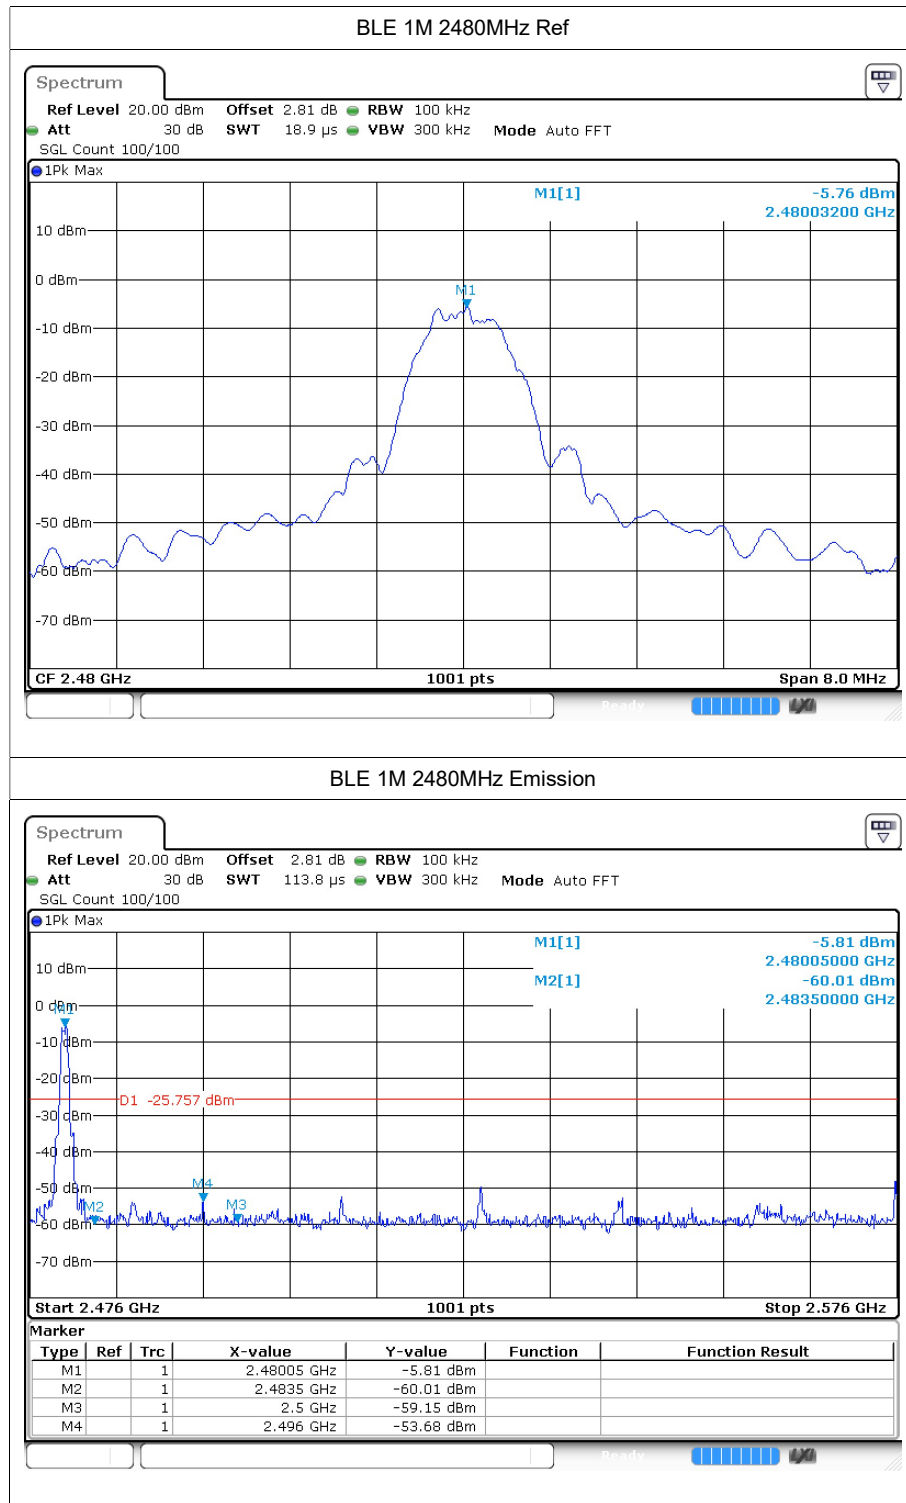

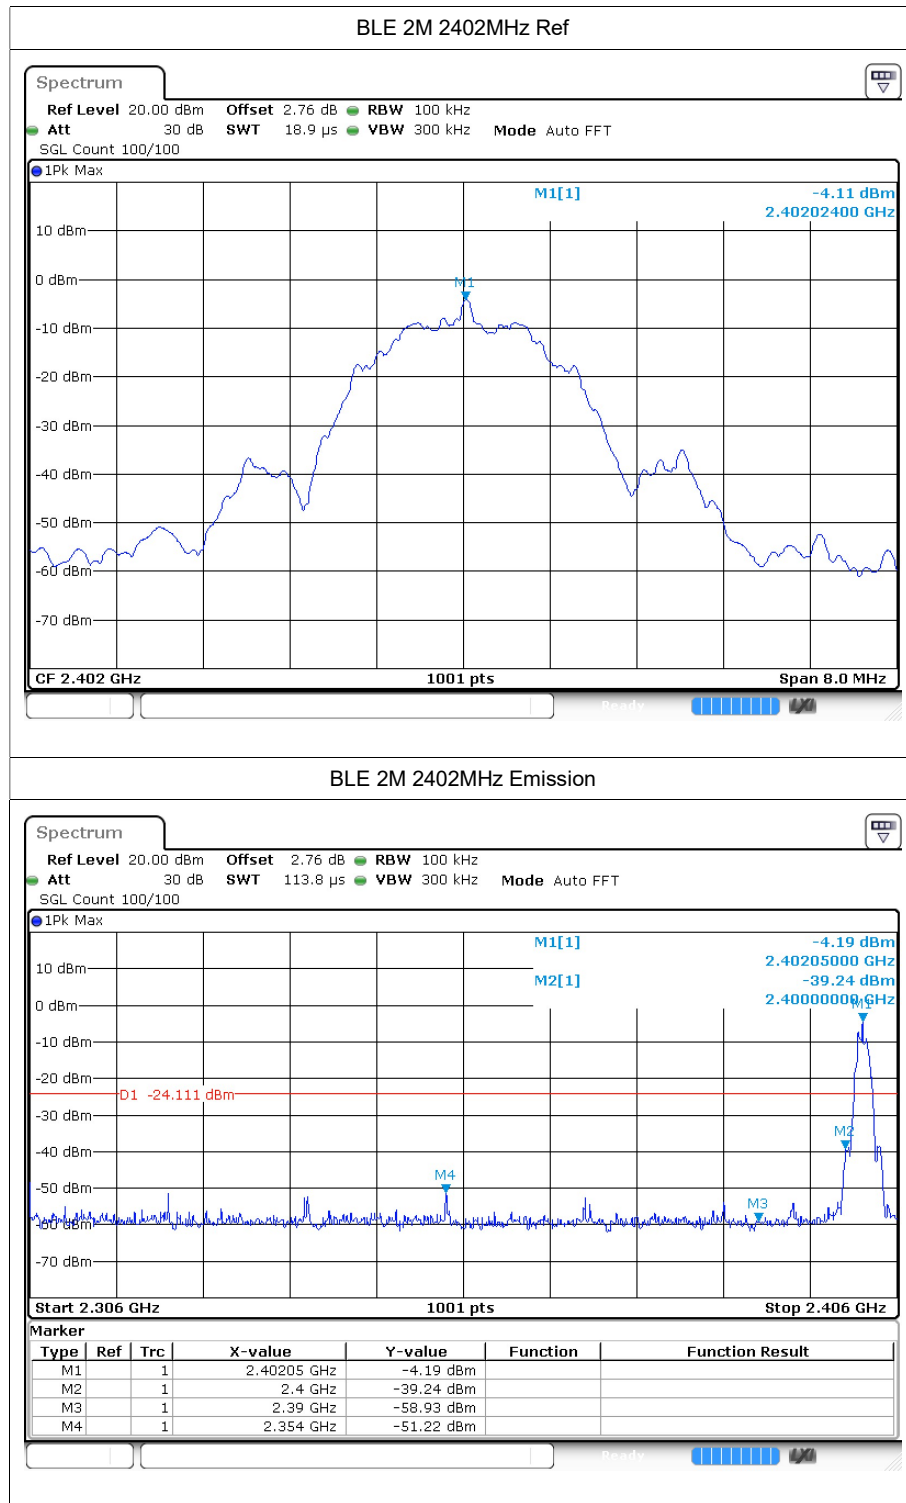

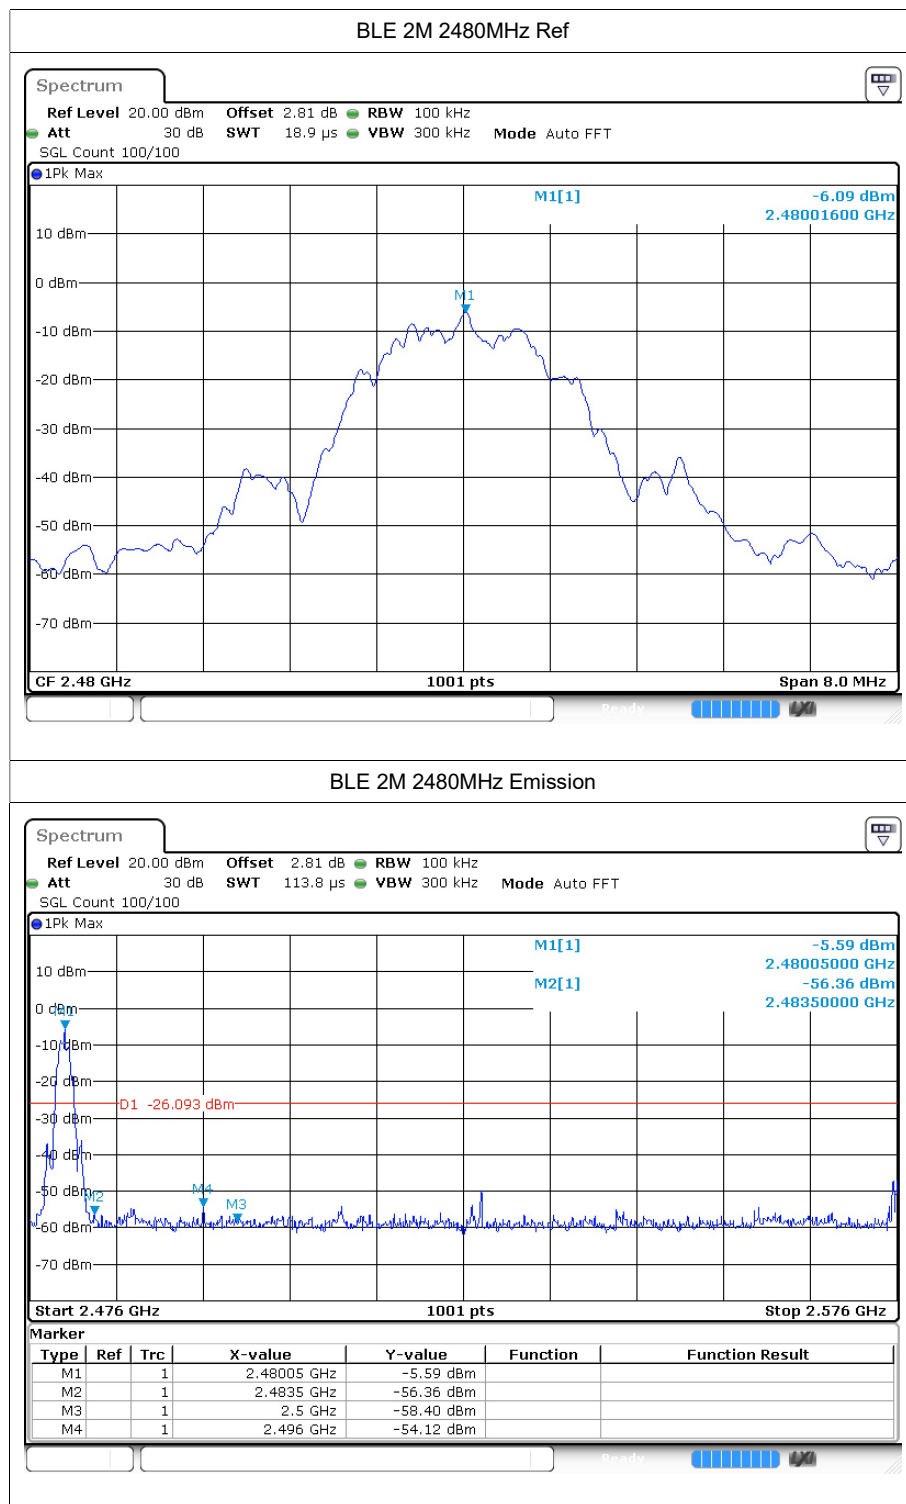



6 Conducted RF Spurious Emission

6.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-39.31	-20	Pass
BLE 1M	2440	-39.06	-20	Pass
BLE 1M	2480	-37.98	-20	Pass
BLE 2M	2402	-39.91	-20	Pass
BLE 2M	2440	-38.8	-20	Pass
BLE 2M	2480	-38.32	-20	Pass

6.2 Test Graphs

