







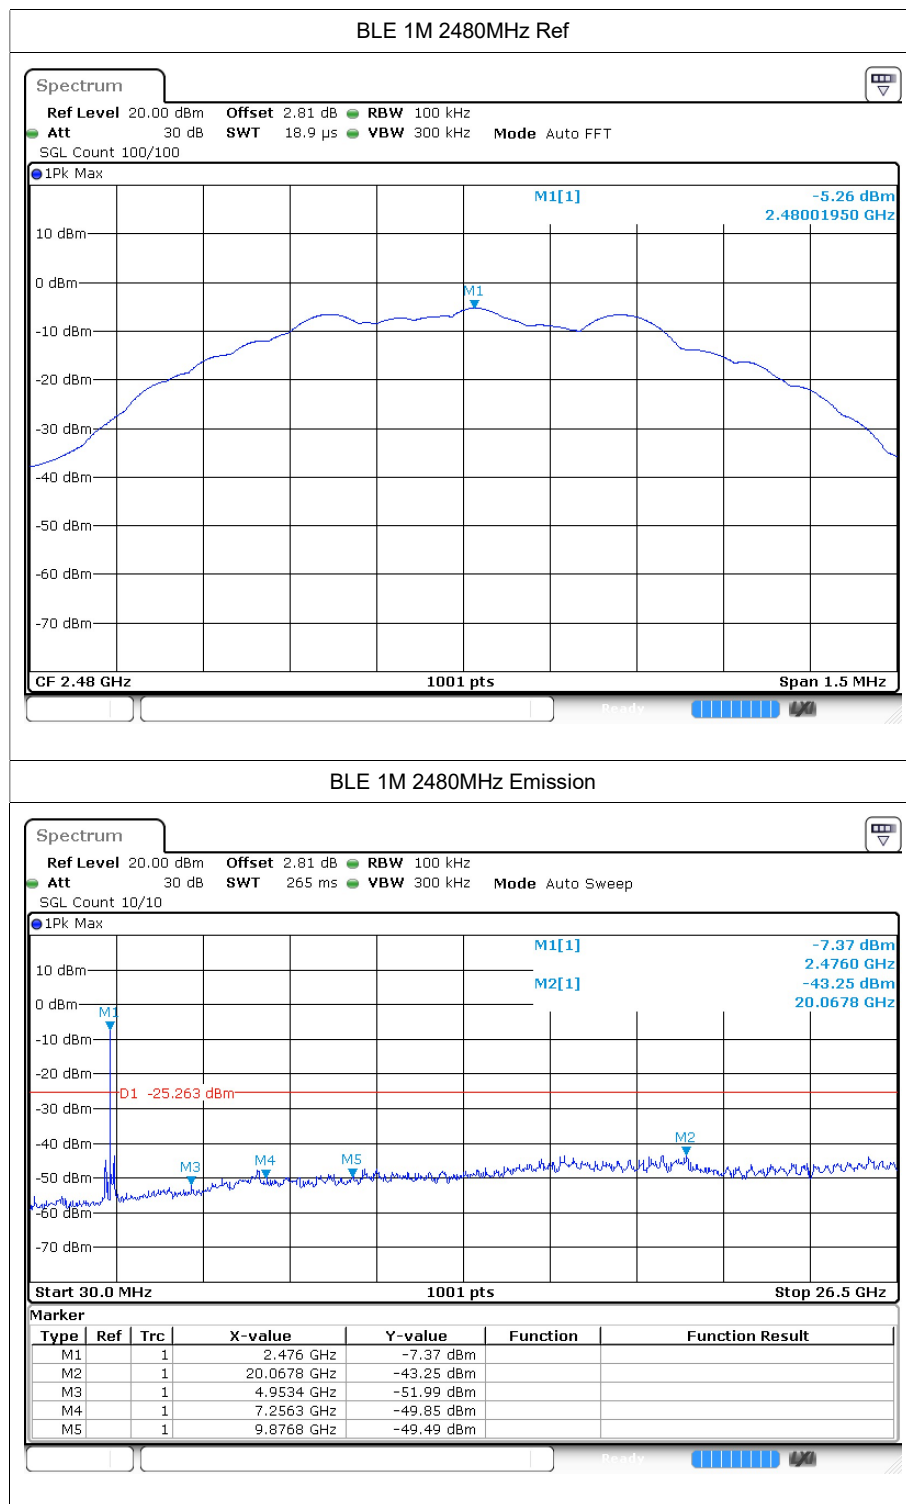

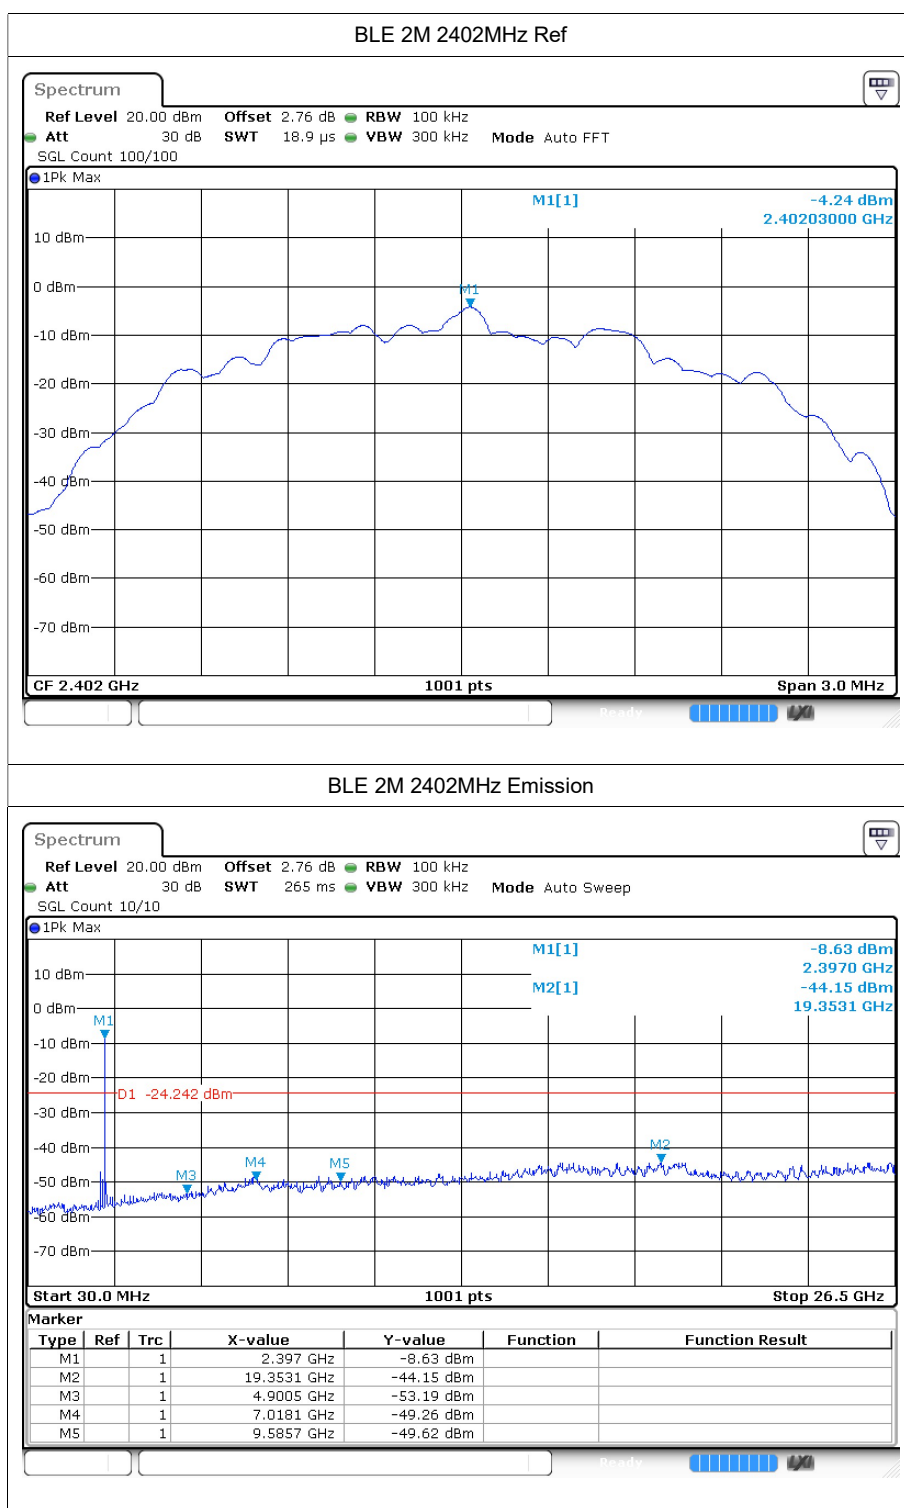

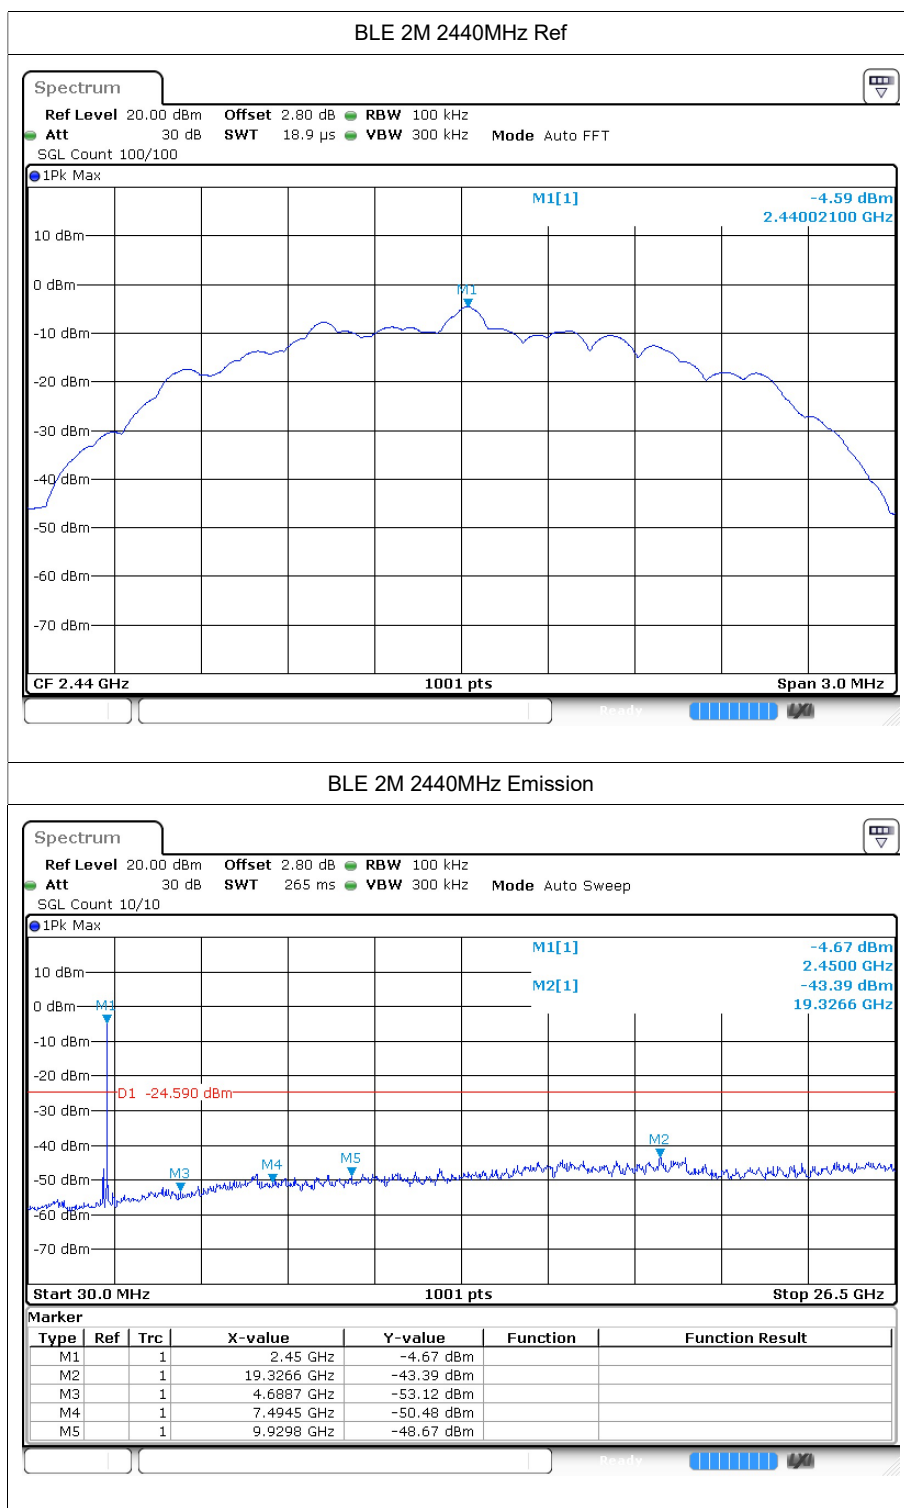

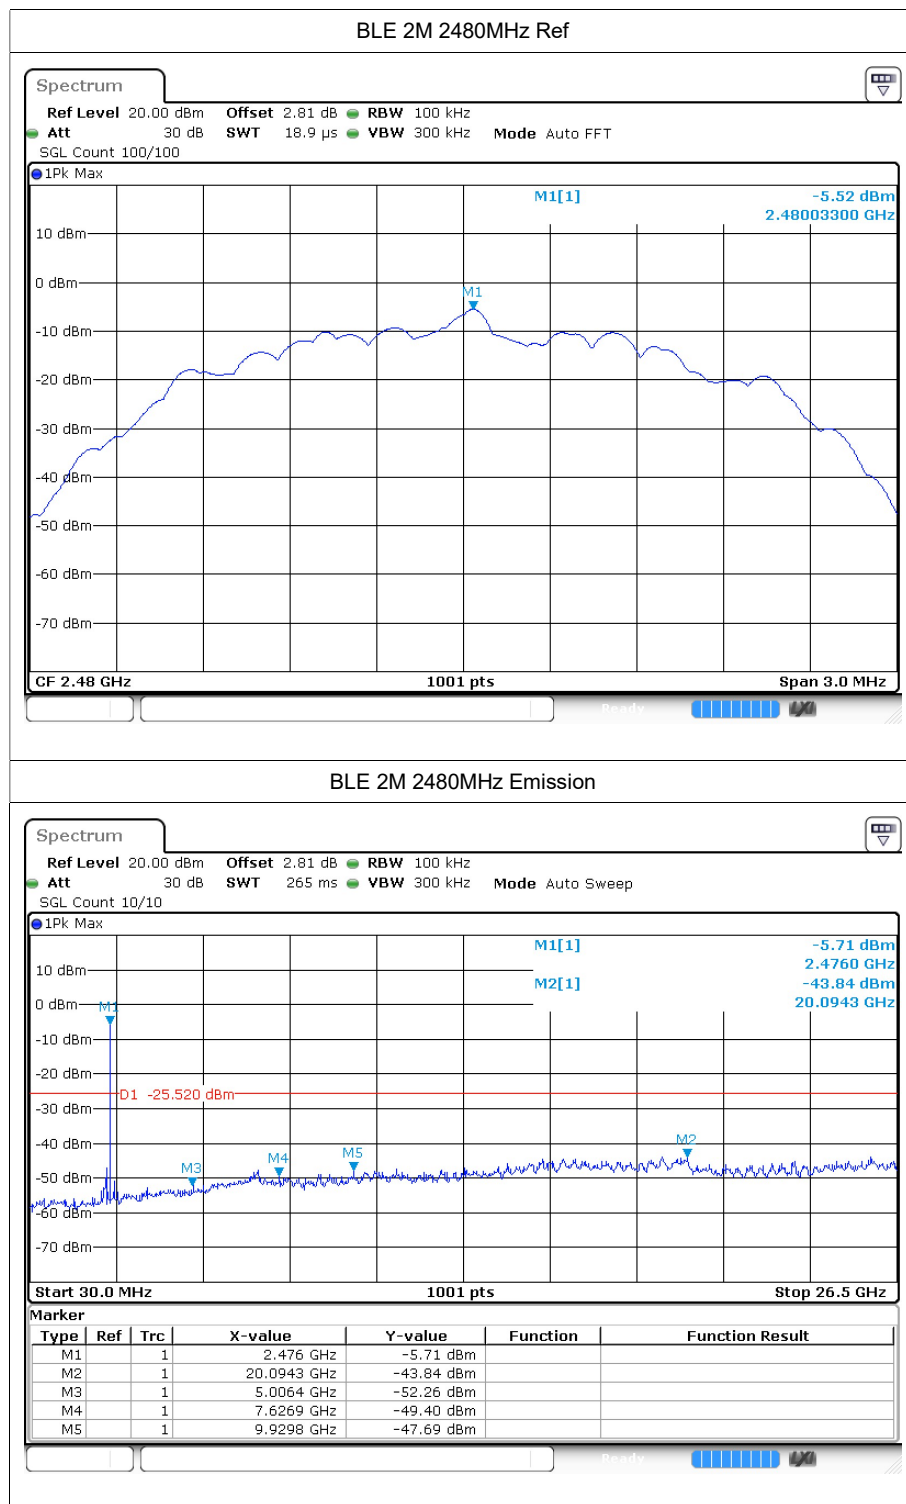



7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-48.27	2.2	-	49.16	Peak	74	Pass
BLE 1M	2402	2310	-56.03	2.2	1.88	43.28	Average	54	Pass
BLE 1M	2402	2353.776	-42.96	2.2	-	54.47	Peak	74	Pass
BLE 1M	2402	2337.936	-53.9	2.2	1.88	45.41	Average	54	Pass
BLE 1M	2402	2390	-50.67	2.2	-	46.76	Peak	74	Pass
BLE 1M	2402	2390	-56.56	2.2	1.88	42.75	Average	54	Pass
BLE 1M	2480	2483.5	-48.64	2.2	-	48.79	Peak	74	Pass
BLE 1M	2480	2483.5	-56.82	2.2	1.88	42.49	Average	54	Pass
BLE 1M	2480	2485.096	-47.37	2.2	-	50.06	Peak	74	Pass
BLE 1M	2480	2488.072	-54.16	2.2	1.88	45.15	Average	54	Pass
BLE 1M	2480	2500	-49.2	2.2	-	48.23	Peak	74	Pass
BLE 1M	2480	2500	-56.5	2.2	1.88	42.81	Average	54	Pass
BLE 2M	2402	2310	-49.46	2.2	-	47.97	Peak	74	Pass
BLE 2M	2402	2310	-56.86	2.2	4.53	45.1	Average	54	Pass
BLE 2M	2402	2353.488	-43.63	2.2	-	53.8	Peak	74	Pass
BLE 2M	2402	2339.376	-53.91	2.2	4.53	48.05	Average	54	Pass
BLE 2M	2402	2390	-49.85	2.2	-	47.58	Peak	74	Pass
BLE 2M	2402	2390	-57.04	2.2	4.53	44.92	Average	54	Pass
BLE 2M	2480	2483.5	-48.62	2.2	-	48.81	Peak	74	Pass
BLE 2M	2480	2483.5	-56.16	2.2	4.54	45.81	Average	54	Pass
BLE 2M	2480	2488.6	-47.66	2.2	-	49.77	Peak	74	Pass
BLE 2M	2480	2488.216	-55.32	2.2	4.54	46.65	Average	54	Pass
BLE 2M	2480	2500	-50.33	2.2	-	47.1	Peak	74	Pass
BLE 2M	2480	2500	-56.66	2.2	4.54	45.31	Average	54	Pass

7.2 Test Graphs

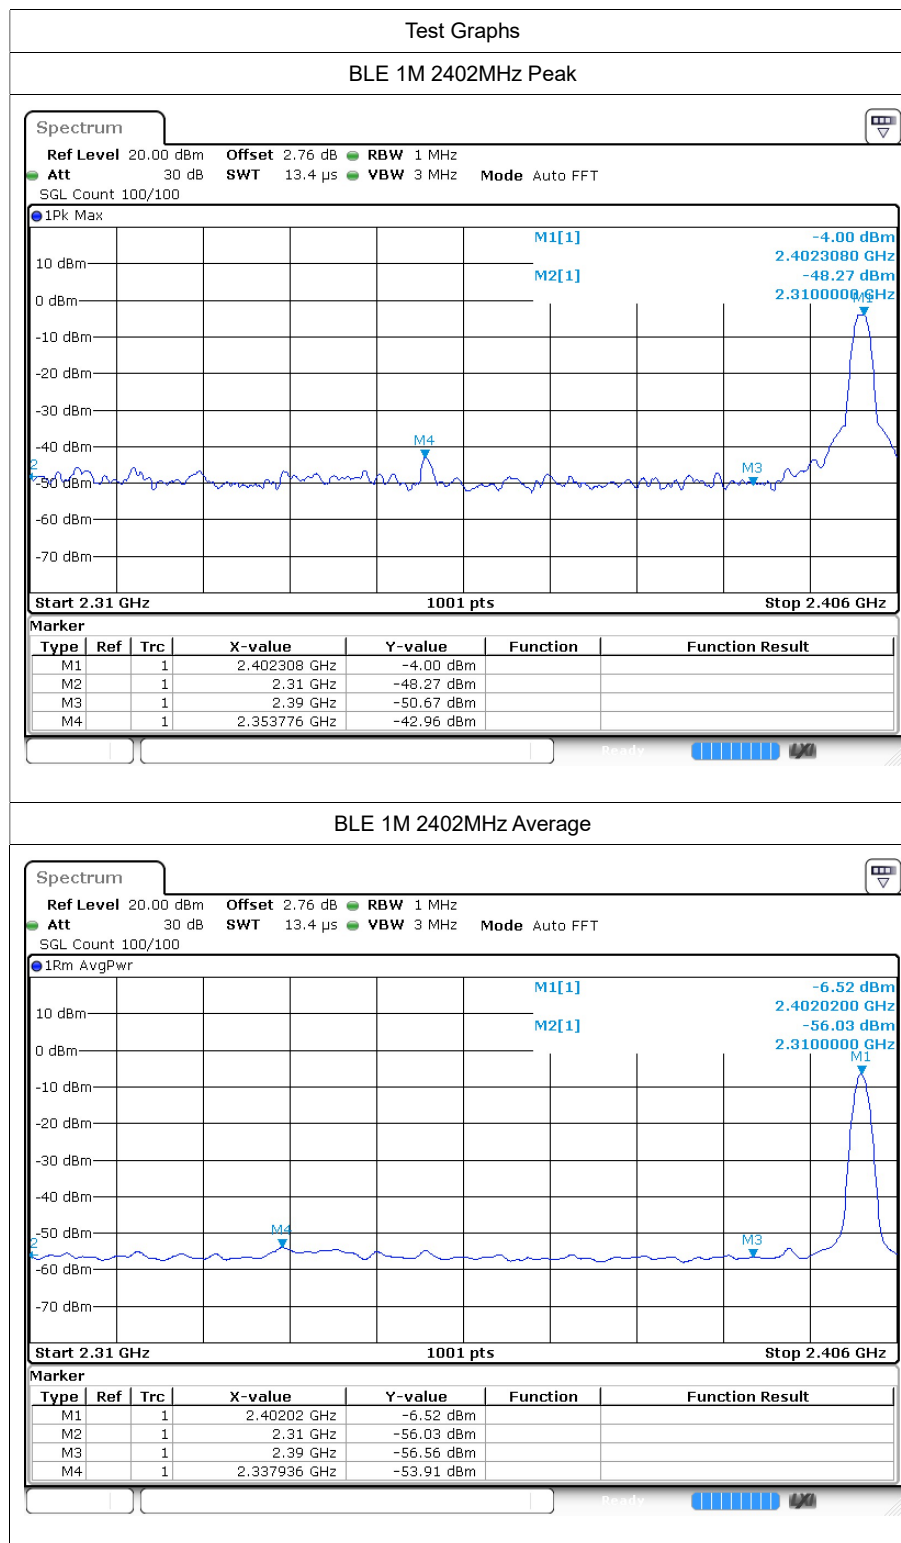

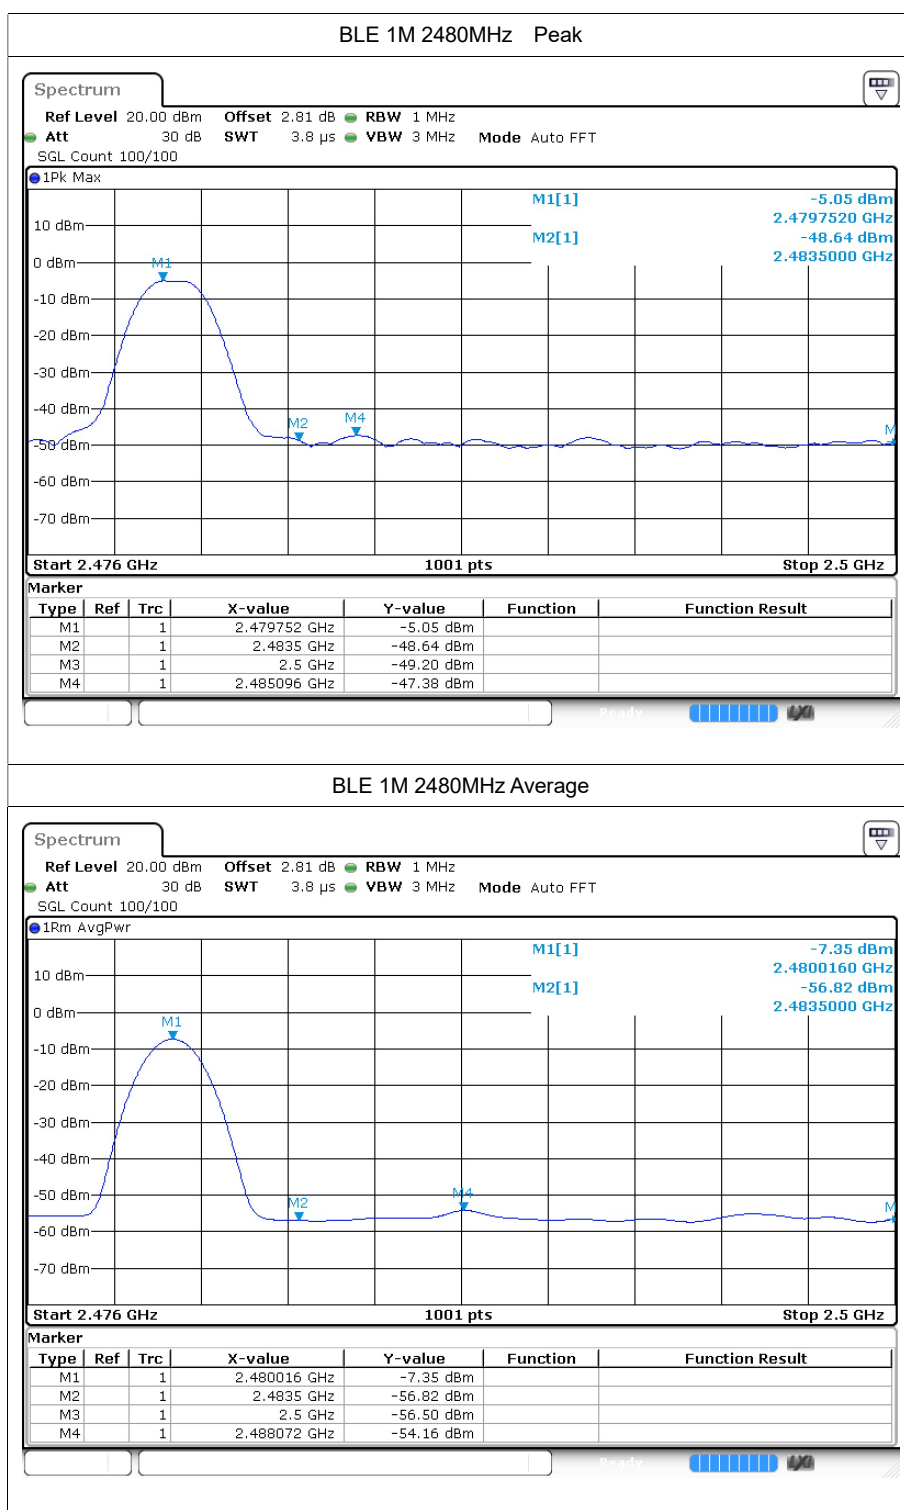

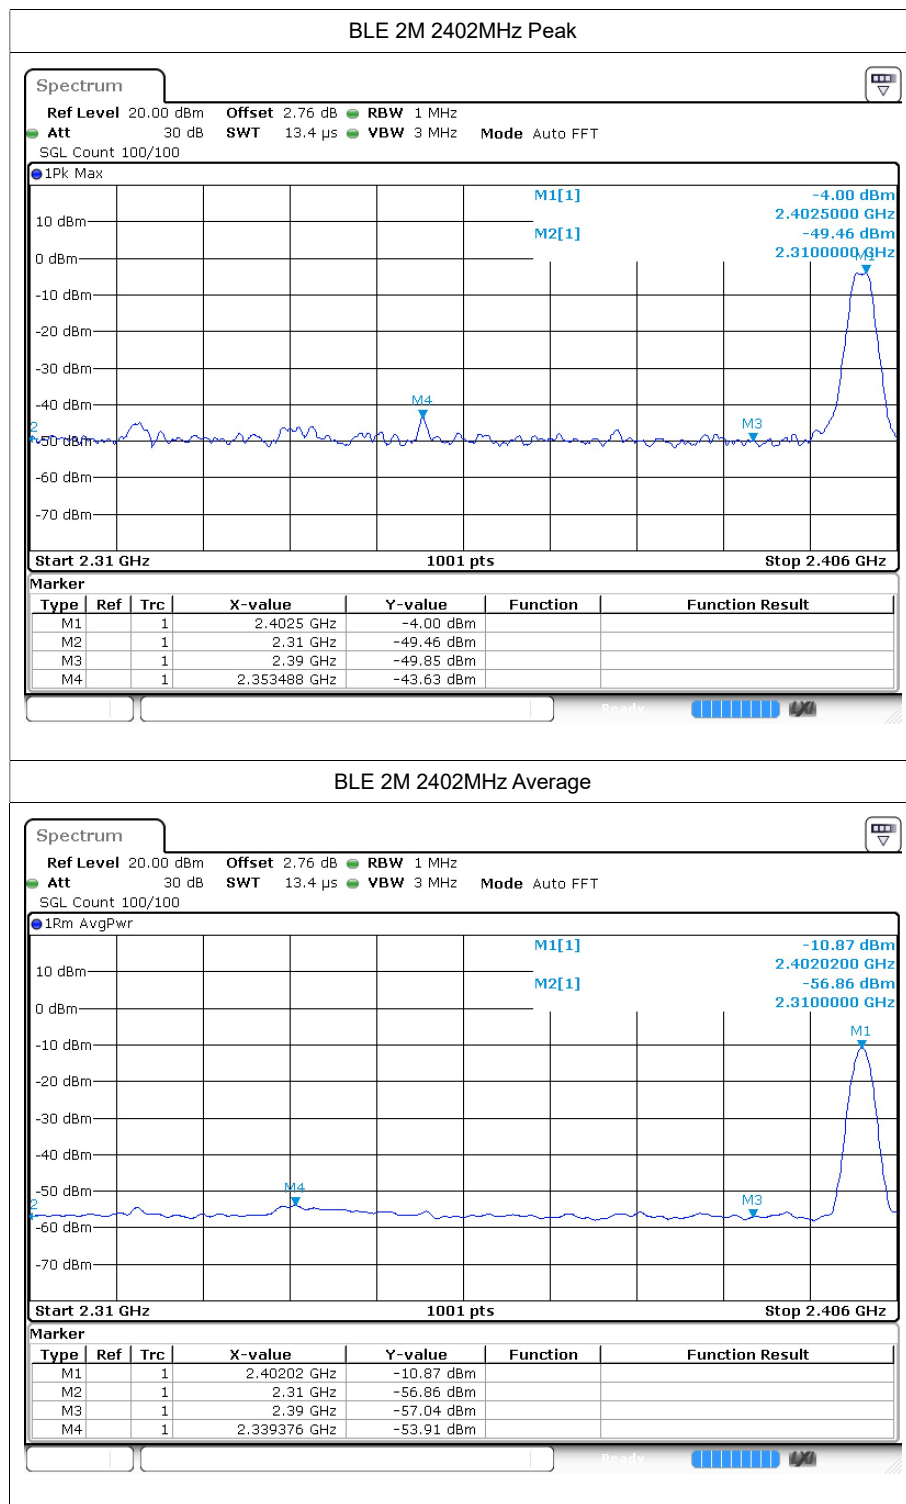

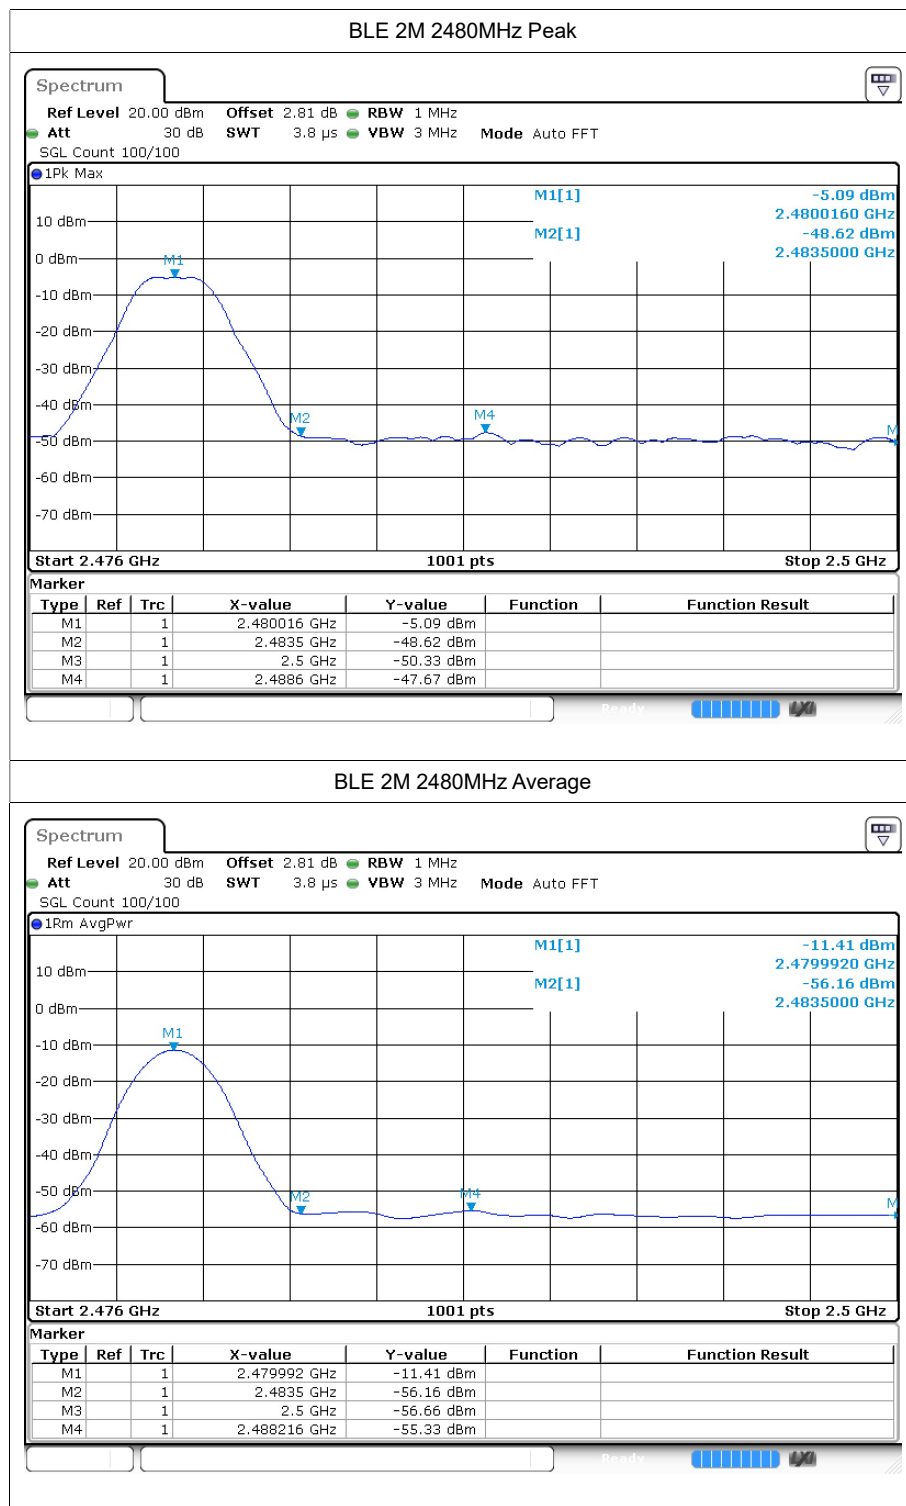

---The End---