


# TEST REPORT

|                      |                                                                                                                                              |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Report No.           | CISRR24062720402                                                                                                                             |
| Project No.          | CISR240517097                                                                                                                                |
| FCC ID               | 2BHBO-OWS31                                                                                                                                  |
| Applicant            | Shenzhen Xiaoqie Electronics Co.,LTD                                                                                                         |
| Address              | Room 506,Building,No.B11, Zongtai Digital Economy Industrial Park,Xixiang Street, Shenzhen, China                                            |
| Manufacturer         | Shenzhen Xinyihong Electronics Co.,LTD                                                                                                       |
| Address              | 501, Building B, Jianyu First Industrial Zone, Nanchang Chuangye Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, China. |
| Product Name         | Open Ear Bluetooth Headsets                                                                                                                  |
| Trade Mark           | --                                                                                                                                           |
| Model/Type reference | OWS31                                                                                                                                        |
| Listed Model(s)      | BY01, Bearfits01                                                                                                                             |
| Standard             | Part 15 Subpart C Section 15.247                                                                                                             |
| Test date            | June 27, 2024 ~ July 08, 2024                                                                                                                |
| Issue date           | July 09, 2024                                                                                                                                |
| Test result          | <b>Complied</b>                                                                                                                              |



Prepared by: Rory Huang



Approved by: Genry Long

*The test results relate only to the tested samples.*

*The test report should not be reproduced except in full without the written approval of Shenzhen Bangce Testing Technology Co., Ltd.*

## Contents

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>1. REPORT VERSION .....</b>                                | <b>3</b>  |
| <b>2. SUMMARY OF TEST RESULT .....</b>                        | <b>4</b>  |
| <b>3. SUMMARY .....</b>                                       | <b>5</b>  |
| 3.1. Product Description .....                                | 5         |
| 3.2. Radio Specification Description .....                    | 5         |
| 3.3. Modification of EUT .....                                | 6         |
| 3.4. Testing Site .....                                       | 6         |
| 3.5. Field Strength Calculation .....                         | 6         |
| 3.6. DISTURBANCE Calculation .....                            | 6         |
| <b>4. TEST CONFIGURATION .....</b>                            | <b>7</b>  |
| 4.1. Test frequency list .....                                | 7         |
| 4.2. Test mode .....                                          | 7         |
| 4.3. Support unit used in test configuration and system ..... | 7         |
| 4.4. Test sample information .....                            | 7         |
| 4.5. Testing environmental condition .....                    | 8         |
| 4.6. Statement of the measurement uncertainty .....           | 8         |
| 4.7. Equipment Used during the Test .....                     | 9         |
| <b>5. TEST CONDITIONS AND RESULTS .....</b>                   | <b>10</b> |
| 5.1. Antenna Requirement .....                                | 10        |
| 5.2. AC Conducted Emission .....                              | 11        |
| 5.3. Peak Output Power .....                                  | 14        |
| 5.4. 6 dB Bandwidth .....                                     | 15        |
| 5.5. 99% Occupied Bandwidth .....                             | 16        |
| 5.6. Power spectral density .....                             | 17        |
| 5.7. Conducted Band edge and Spurious Emission .....          | 18        |
| 5.8. Radiated Band edge Emission .....                        | 19        |
| 5.9. Radiated Spurious Emission .....                         | 21        |
| 5.10. Duty Cycle Correction Factor (DCCF) .....               | 29        |
| <b>6. TEST SETUP PHOTOS .....</b>                             | <b>30</b> |
| <b>7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>       | <b>30</b> |
| 7.1 External photos .....                                     | 30        |
| 7.2 Internal photos .....                                     | 30        |

**1. REPORT VERSION**

| Version No. | Issue date    | Description |
|-------------|---------------|-------------|
| 00          | July 09, 2024 | Original    |
|             |               |             |
|             |               |             |

## 2. SUMMARY OF TEST RESULT

| Report clause | Test Item                                 | Standard Requirement    | Result             |
|---------------|-------------------------------------------|-------------------------|--------------------|
| 5.1           | Antenna Requirement                       | 15.203/15.247 (c)       | PASS               |
| 5.2           | AC Conducted Emission                     | 15.207                  | PASS               |
| 5.3           | Peak Output Power                         | 15.247 (b)(3)           | PASS               |
| 5.4           | 6 dB Bandwidth                            | 15.247 (a)(2)           | PASS               |
| 5.5           | 99% Occupied Bandwidth                    | -                       | PASS* <sup>1</sup> |
| 5.6           | Power spectral density                    | 15.247 (e)              | PASS               |
| 5.7           | Conducted Band Edge and Spurious Emission | 15.247(d)/15.205        | PASS               |
| 5.8           | Radiated Band Edge Emission               | 15.205/15.209           | PASS               |
| 5.9           | Radiated Spurious Emission                | 15.247(d)/15.205/15.209 | PASS               |
| 5.10          | Duty Cycle Correction Factor              | -                       | PASS* <sup>1</sup> |

Note:

- The measurement uncertainty is not included in the test result.
- \*1: No requirement on standard, only report these test data.

### 3. SUMMARY

#### 3.1. Product Description

| Main unit information: |                                      |
|------------------------|--------------------------------------|
| Product Name:          | Open Ear Bluetooth Headsets          |
| Trade Mark:            | --                                   |
| Model No.:             | OWS31                                |
| Listed Model(s):       | BY01, Bearfits01                     |
| Power supply:          | Input: DC 5V<br>DC 3.7V from Battery |
| Hardware version:      | V2.0                                 |
| Software version:      | V1.0                                 |

#### 3.2. Radio Specification Description

|                      |                 |
|----------------------|-----------------|
| Technology:          | Bluetooth       |
| Modulation:          | GFSK            |
| Operation frequency: | 2402MHz~2480MHz |
| Channel number:      | 40              |
| Channel separation:  | 2MHz            |
| Antenna type:        | Ceramic Antenna |
| Antenna gain:        | 2.7dBi          |

Channel list:

BT LE: 1Mbps, GFSK.

|             |                 |             |                 |
|-------------|-----------------|-------------|-----------------|
| <b>CH00</b> | <b>2402 MHz</b> | <b>CH20</b> | <b>2442 MHz</b> |
| CH01        | 2404 MHz        | CH21        | 2444 MHz        |
| CH02        | 2406 MHz        | CH22        | 2446 MHz        |
| --          | --              | --          | --              |
| --          | --              | --          | --              |
| <b>CH19</b> | <b>2440 MHz</b> | <b>CH39</b> | <b>2480 MHz</b> |

### 3.3. Modification of EUT

No modifications are made to the EUT during all test items.

### 3.4. Testing Site

|                         |                                                                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Laboratory Name         | Shenzhen Bangce Testing Technology Co., Ltd.                                                                                 |
| Laboratory Location     | 101, building 10, Yunli Intelligent Park, Shutianpu community, Matian Street, Guangming District, Shenzhen, Guangdong, China |
| FCC registration number | 736346                                                                                                                       |

### 3.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

### 3.6. DISTURBANCE Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

|                                  |                                            |
|----------------------------------|--------------------------------------------|
| Where CD = Conducted Disturbance | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude           | PL = 10 dB Pulse Limiter Factor            |

## 4. TEST CONFIGURATION

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

### 4.1. Test frequency list

| Channel | Frequency (MHz) |
|---------|-----------------|
| CH-L    | 2402            |
| CH-M    | 2440            |
| CH-H    | 2480            |

### 4.2. Test mode

| For RF test items:                                                                                                                                                                                                                                                  |             |            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------------|
| The engineering test program was provided(FCC_assist_1.0.1.2) and enabled to make EUT continuous transmitting.Power setting Default.                                                                                                                                |             |            |
| Test Item                                                                                                                                                                                                                                                           | Test Mode   | Modulation |
| Conducted test item                                                                                                                                                                                                                                                 | TX CH-L     | GFSK-1M    |
|                                                                                                                                                                                                                                                                     | TX CH-M     | GFSK-1M    |
|                                                                                                                                                                                                                                                                     | TX CH-H     | GFSK-1M    |
|                                                                                                                                                                                                                                                                     | Normal link | --         |
| Radiated test item                                                                                                                                                                                                                                                  | TX CH-L     | GFSK-1M    |
|                                                                                                                                                                                                                                                                     | TX CH-M     | GFSK-1M    |
|                                                                                                                                                                                                                                                                     | TX CH-H     | GFSK-1M    |
|                                                                                                                                                                                                                                                                     | Normal link | --         |
| Remark:                                                                                                                                                                                                                                                             |             |            |
| <ul style="list-style-type: none"> <li>The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.All patterns have predictions, and the report only shows the worst pattern data.</li> </ul> |             |            |

### 4.3. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

| Item | Equipment name | Trade Name   | Model No.    |
|------|----------------|--------------|--------------|
| 1    | Adapter        | Huawei       | HW-05002000C |
| 2    | Phone          | China Mobile | SP100        |

### 4.4. Test sample information

| Type            | sample no.        |
|-----------------|-------------------|
| Engineer sample | CISR240627204-S01 |
| Normal sample   | CISR240627204-S02 |

#### 4.5. Testing environmental condition

| Type               | Requirement  | Actual   |
|--------------------|--------------|----------|
| Temperature:       | 15~35°C      | 25°C     |
| Relative Humidity: | 25~75%       | 50%      |
| Air Pressure:      | 860~1060mbar | 1000mbar |

#### 4.6. Statement of the measurement uncertainty

| No. | Test Items                                | Measurement Uncertainty                        |
|-----|-------------------------------------------|------------------------------------------------|
| 1   | AC Conducted Emission                     | 1.63dB                                         |
| 2   | Peak Output Power                         | 1.34dB                                         |
| 3   | Power Spectral Density                    | 1.34dB                                         |
| 4   | 6dB Bandwidth                             | 0.002%                                         |
| 5   | 99% Occupied Bandwidth                    | 0.002%                                         |
| 6   | Duty cycle                                | -                                              |
| 7   | Conducted Band Edge and Spurious Emission | 1.93dB                                         |
| 8   | Radiated Band Edge Emission               | 3.76dB for 30MHz-1GHz<br>3.80dB for above 1GHz |
| 9   | Radiated Spurious Emission                | 3.76dB for 30MHz-1GHz<br>3.80dB for above 1GHz |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .



#### 4.7. Equipment Used during the Test

| Equipment                              | Manufacture   | Model No.   | Serial No.      | Last cal.  | Cal Interval |
|----------------------------------------|---------------|-------------|-----------------|------------|--------------|
| 9*6*6 anechoic chamber                 | SKET          | 9.3*6.3*6   | N/A             | 2021.10.15 | 3Year        |
| Spectrum analyzer                      | Agilent       | N9020A      | MY50530263      | 2024.01.08 | 1Year        |
| Receiver                               | ROHDE&SCHWARZ | ESCI        | 100853          | 2024.01.08 | 1Year        |
| Spectrum analyzer                      | R&S           | FSV-40N     | /               | 2024.01.08 | 1Year        |
| Bilog Antenna                          | Schwarzbeck   | VULB 9163   | 1463            | 2023.01.09 | 2Year        |
| Horn Antenna                           | SCHWARZBECK   | BBHA 9120 D | 2487            | 2023.01.09 | 2Year        |
| Active Loop Antenna                    | SCHWARZBECK   | FMZB 1519B  | /               | 2023.01.09 | 2Year        |
| RF Cable                               | Tonscend      | Cable 1     | /               | 2024.01.08 | 1Year        |
| RF Cable                               | Tonscend      | Cable 2     | /               | 2024.01.08 | 1Year        |
| RF Cable                               | SKET          | Cable 3     | /               | 2024.01.08 | 1Year        |
| Pre-amplifier                          | Tonscend      | TAP9K3G32   | AP21G806153     | 2024.01.08 | 1Year        |
| Pre-amplifier                          | Tonscend      | TAP01018050 | AP22E806229     | 2024.01.08 | 1Year        |
| L.I.S.N.#1                             | Schwarzbeck   | NSLK8127    | /               | 2024.01.08 | 1Year        |
| L.I.S.N.#2                             | ROHDE&SCHWARZ | ENV216      | /               | 2024.01.08 | 1Year        |
| Horn Antenna                           | SCHWARZBECK   | BBHA9170    | 1130            | 2023.01.09 | 2 Year       |
| Preamplifier                           | Tonscend      | TAP18040048 | AP21C806126     | 2024.01.08 | 1Year        |
| variable-frequency power source        | Pinhong       | PH1110      | /               | 2024.01.08 | 1Year        |
| 6dB Attenuator                         | SKET          | DC-6G       | /               | N/A        | N/A          |
| Artificial power network               | Schwarzbeck   | NSLK8127    | 8127-01096      | 2024.01.08 | 1Year        |
| EMI Test Receiver                      | Rohde&schwarz | ESCI7       | 100853          | 2024.01.08 | 1Year        |
| 8-wire Impedance Stabilization Network | Schwarzbeck   | NTFM 8158   | 8158-00337      | 2024.01.08 | 1Year        |
| Artificial power network               | Schwarzbeck   | ENV216      | /               | 2024.01.08 | 1Year        |
| Antenna tower                          | SKET          | Bk-4AT-BS   | AT2021040101-V1 | N/A        | N/A          |

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna Requirement

#### Standard Applicable:

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### Description

The EUT antenna is Ceramic antenna (2.7dBi), the directional gain of the antenna less than 6dBi. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used. Antenna structure please refer to the EUT internal photographs antenna photo.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen Bangce Testing Technology Co., Ltd. does not assume any responsibility.

## 5.2. AC Conducted Emission


### Limit:

### FCC CFR Title 47 Part 15 Subpart C Section 15.207

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

### Test configuration:

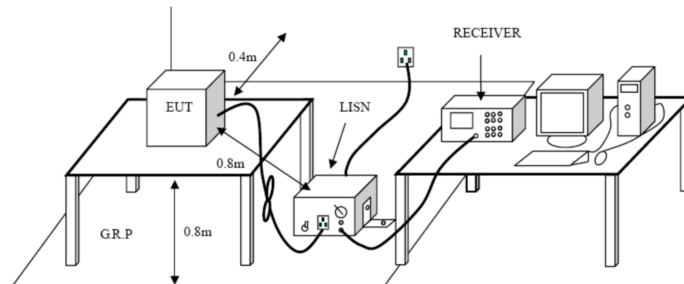

### Test procedure:

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

### Test mode:

Refer to the clause 4.2


### Result:

**Passed**

Have pre-scan all test channel, found CH00(GFSK-1M) which it was worst case, so only show the worst case's data on this report.

Test Line:


L

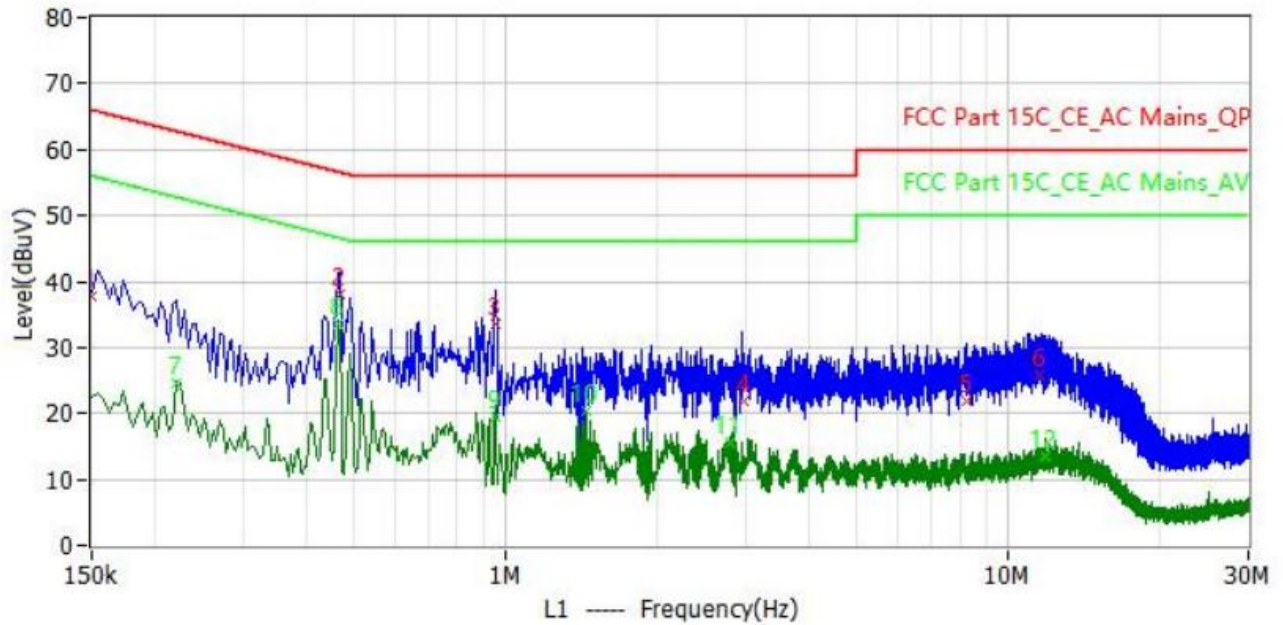

| No. | Frequency  | Limit dBuV | Level dBuV | Margin dB | Reading dBuV | Factor dB | Detector | Polar |
|-----|------------|------------|------------|-----------|--------------|-----------|----------|-------|
| 1   | 150.000kHz | 66.0       | 37.9       | -28.1     | 37.9         | 0.0       | QP       | L1    |
| 2   | 466.000kHz | 56.6       | 38.0       | -18.6     | 37.9         | 0.1       | QP       | L1    |
| 3   | 954.000kHz | 56.0       | 33.7       | -22.3     | 33.6         | 0.1       | QP       | L1    |
| 4   | 2.970MHz   | 56.0       | 21.9       | -34.1     | 21.8         | 0.1       | QP       | L1    |
| 5   | 8.242MHz   | 60.0       | 21.8       | -38.2     | 21.6         | 0.2       | QP       | L1    |
| 6   | 11.522MHz  | 60.0       | 25.9       | -34.1     | 25.6         | 0.3       | QP       | L1    |
| 7   | 222.000kHz | 52.7       | 24.7       | -28.0     | 24.7         | 0.0       | CAV      | L1    |
| 8   | 462.000kHz | 46.7       | 33.5       | -13.2     | 33.4         | 0.1       | CAV      | L1    |
| 9   | 954.000kHz | 46.0       | 19.4       | -26.6     | 19.3         | 0.1       | CAV      | L1    |
| 10  | 1.442MHz   | 46.0       | 20.3       | -25.7     | 20.2         | 0.1       | CAV      | L1    |
| 11  | 2.802MHz   | 46.0       | 15.6       | -30.4     | 15.5         | 0.1       | CAV      | L1    |
| 12  | 11.818MHz  | 50.0       | 13.5       | -36.5     | 13.2         | 0.3       | CAV      | L1    |

Test Line:

N

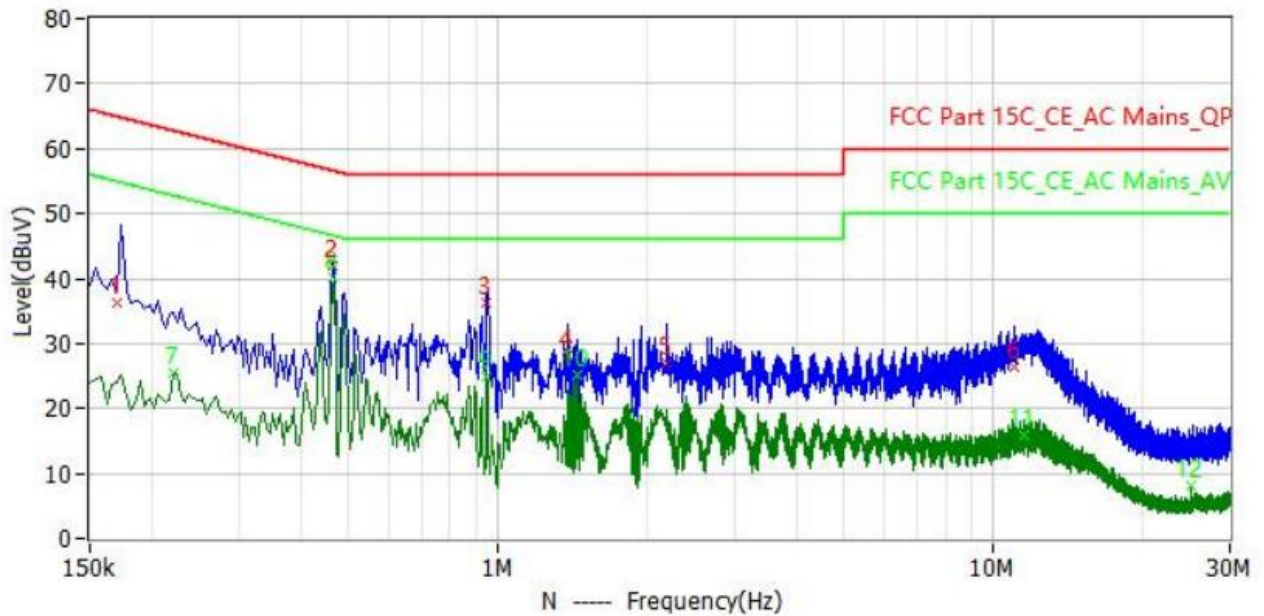

| No. | Frequency  | Limit dBuV | Level dBuV | Margin dB | Reading dBuV | Factor dB | Detector | Polar |
|-----|------------|------------|------------|-----------|--------------|-----------|----------|-------|
| 1   | 170.000kHz | 65.0       | 36.4       | -28.6     | 36.4         | 0.0       | QP       | N     |
| 2   | 462.000kHz | 56.7       | 41.8       | -14.9     | 41.7         | 0.1       | QP       | N     |
| 3   | 950.000kHz | 56.0       | 36.4       | -19.6     | 36.3         | 0.1       | QP       | N     |
| 4   | 1.382MHz   | 56.0       | 28.1       | -27.9     | 28.0         | 0.1       | QP       | N     |
| 5   | 2.198MHz   | 56.0       | 26.9       | -29.1     | 26.8         | 0.1       | QP       | N     |
| 6   | 10.982MHz  | 60.0       | 26.3       | -33.7     | 26.0         | 0.3       | QP       | N     |
| 7   | 222.000kHz | 52.7       | 25.4       | -27.3     | 25.4         | 0.0       | CAV      | N     |
| 8   | 462.000kHz | 46.7       | 40.2       | -6.5      | 40.1         | 0.1       | CAV      | N     |
| 9   | 950.000kHz | 46.0       | 25.0       | -21.0     | 24.9         | 0.1       | CAV      | N     |
| 10  | 1.442MHz   | 46.0       | 25.1       | -20.9     | 25.0         | 0.1       | CAV      | N     |
| 11  | 11.506MHz  | 50.0       | 16.0       | -34.0     | 15.7         | 0.3       | CAV      | N     |
| 12  | 25.154MHz  | 50.0       | 8.1        | -41.9     | 7.5          | 0.6       | CAV      | N     |

Note:

- Factor = LISN Factor + Cable Factor
- Level= Reading + Factor
- Margin= Level – Limit


### 5.3. Peak Output Power

Limit:

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3):**

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test configuration:

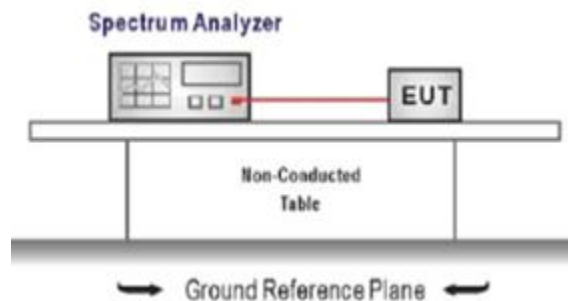

Test procedure:

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span  $\geq 1.5 \times \text{DTS Bandwidth}$   
Peak Detector:  $\text{RBW} \geq \text{DTS Bandwidth}$ ,  $\text{VBW} \geq 3 \times \text{RBW}$   
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Test mode:

Refer to the clause 4.2

Test data:

Refer to the Appendix B

Result:


**Passed**



## 5.4. 6 dB Bandwidth

Limit:

Test configuration:

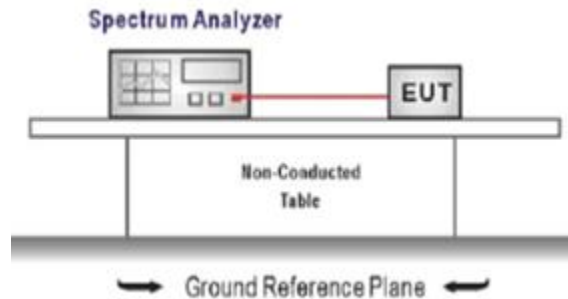

Test procedure:

1. Connect EUT RF Output port to the Spectrum Analyzer through an RF attenuator.
2. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.
3. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.
4. Spectrum Setting:  
6dB bandwidth:
  - (1) Set RBW = 100 kHz.
  - (2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.
  - (6) Allow the trace to stabilize.
  - (7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test mode:

Refer to the clause 4.2

Test data:

Refer to the Appendix B

Result:


**Passed**

## 5.5. 99% Occupied Bandwidth

Limit:

--

Test configuration:

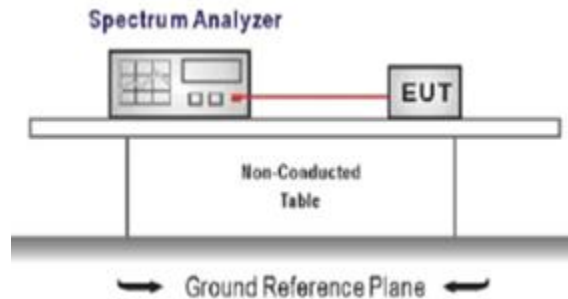

Test procedure:

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency = channel center frequency  
Span  $\geq 1.5 \times \text{OBW}$   
RBW = 1%~5%OBW, VBW  $\geq 3 \times \text{RBW}$   
Sweep time = auto couple  
Detector = Peak, Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

Test mode:

Refer to the clause 4.2

Test data:

Refer to the Appendix B

Result:

**Passed**




## 5.6. Power spectral density

### Limit:

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### Test configuration:

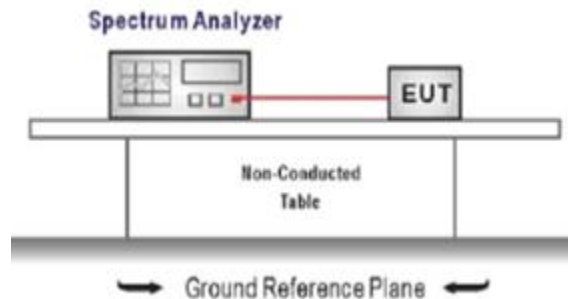

### Test procedure:

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq 3$  kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak less than 8dBm.

### Test mode:

Refer to the clause 4.2

### Test data:

Refer to the Appendix B

### Result:

**Passed**


## 5.7. Conducted Band edge and Spurious Emission

### Limit:

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### Test configuration:

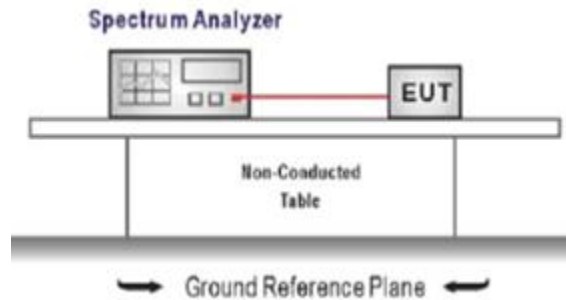

### Test procedure:

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Emission level measurement  
Set the center frequency and span to encompass frequency range to be measured  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum amplitude level.
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

### Test mode:

Refer to the clause 4.2

### Test data:

Refer to the Appendix B

### Result:

**Passed**


## 5.8. Radiated Band edge Emission

### Limit:

### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

### Test configuration:

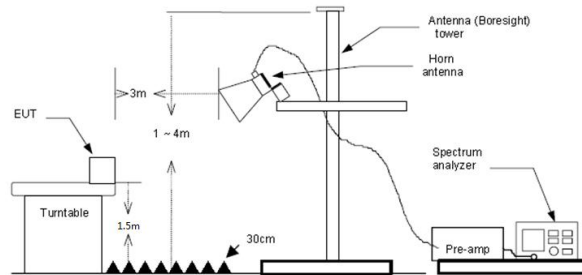

### Test procedure:

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
  - a) Span shall wide enough to fully capture the emission being measured
  - b) Set RBW=100kHz for <1GHz, VBW=3\*RBW, Sweep time=auto, Detector=peak, Trace=max hold
  - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
  - d) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=Average, Trace=RMS for Average measurement

### Test mode:

Refer to the clause 4.2

### Result:

**Passed**

### Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit - Level
- 3) Average measurement was not performed if peak level is lower than average limit
- 4) The other emission levels were very low against the limit.

Left

| Test channel:CH00(GFSK-1M) |                |                    |                   |                    |                           |              |                 |             |         |            |
|----------------------------|----------------|--------------------|-------------------|--------------------|---------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)                | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correc tion Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 2390.00                    | 70.52          | 28.62              | 4.08              | 38.62              | -5.92                     | 64.60        | 74              | 9.40        | Peak    | Horizontal |
| 2390.00                    | 51.52          | 28.62              | 4.08              | 38.62              | -5.92                     | 45.60        | 54              | 8.40        | Average | Horizontal |
| 2390.00                    | 68.81          | 28.62              | 4.08              | 38.62              | -5.92                     | 62.89        | 74              | 11.11       | Peak    | Vertical   |
| 2390.00                    | 50.63          | 28.62              | 4.08              | 38.62              | -5.92                     | 44.71        | 54              | 9.29        | Average | Vertical   |

| Test channel:CH39(GFSK-1M) |                |                    |                   |                    |                           |              |                 |             |         |            |
|----------------------------|----------------|--------------------|-------------------|--------------------|---------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)                | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correc tion Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 2483.50                    | 70.18          | 29.45              | 3.91              | 40.17              | -6.81                     | 63.37        | 74              | 10.63       | Peak    | Horizontal |
| 2483.50                    | 50.00          | 29.45              | 3.91              | 40.17              | -6.81                     | 43.19        | 54              | 10.81       | Average | Horizontal |
| 2483.50                    | 67.88          | 29.45              | 3.91              | 40.17              | -6.81                     | 61.07        | 74              | 12.93       | Peak    | Vertical   |
| 2483.50                    | 50.69          | 29.45              | 3.91              | 40.17              | -6.81                     | 43.88        | 54              | 10.12       | Average | Vertical   |

Right

| Test channel:CH00(GFSK-1M) |                |                    |                   |                    |                           |              |                 |             |         |            |
|----------------------------|----------------|--------------------|-------------------|--------------------|---------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)                | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correc tion Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 2390.00                    | 70.65          | 28.62              | 4.08              | 38.62              | -5.92                     | 64.73        | 74              | 9.27        | Peak    | Horizontal |
| 2390.00                    | 51.14          | 28.62              | 4.08              | 38.62              | -5.92                     | 45.22        | 54              | 8.78        | Average | Horizontal |
| 2390.00                    | 68.97          | 28.62              | 4.08              | 38.62              | -5.92                     | 63.05        | 74              | 10.95       | Peak    | Vertical   |
| 2390.00                    | 49.71          | 28.62              | 4.08              | 38.62              | -5.92                     | 43.79        | 54              | 10.21       | Average | Vertical   |

| Test channel:CH39(GFSK-1M) |                |                    |                   |                    |                           |              |                 |             |         |            |
|----------------------------|----------------|--------------------|-------------------|--------------------|---------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)                | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correc tion Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 2483.50                    | 69.86          | 29.45              | 3.91              | 40.17              | -6.81                     | 63.05        | 74              | 10.95       | Peak    | Horizontal |
| 2483.50                    | 50.19          | 29.45              | 3.91              | 40.17              | -6.81                     | 43.38        | 54              | 10.62       | Average | Horizontal |
| 2483.50                    | 67.87          | 29.45              | 3.91              | 40.17              | -6.81                     | 61.06        | 74              | 12.94       | Peak    | Vertical   |
| 2483.50                    | 51.05          | 29.45              | 3.91              | 40.17              | -6.81                     | 44.24        | 54              | 9.76        | Average | Vertical   |

## 5.9. Radiated Spurious Emission

### Limit:

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209

| Frequency            | Limit (dBuV/m)    | Value      |
|----------------------|-------------------|------------|
| 0.009 MHz ~0.49 MHz  | 2400/F(kHz) @300m | Quasi-peak |
| 0.49 MHz ~ 1.705 MHz | 24000/F(kHz) @30m | Quasi-peak |
| 1.705 MHz ~30 MHz    | 30 @30m           | Quasi-peak |


Limit dBuV/m @3m = Limit dBuV/m @300m + 40\*log(300/3)

Limit dBuV/m @3m = Limit dBuV/m @30m + 40\*log(30/3)


| Frequency     | Limit (dBuV/m @3m) | Value      |
|---------------|--------------------|------------|
| 30MHz~88MHz   | 40.00              | Quasi-peak |
| 88MHz~216MHz  | 43.50              | Quasi-peak |
| 216MHz~960MHz | 46.00              | Quasi-peak |
| 960MHz~1GHz   | 54.00              | Quasi-peak |
| Above 1GHz    | 54.00              | Average    |
|               | 74.00              | Peak       |

### Test configuration:


#### 9kHz~30MHz

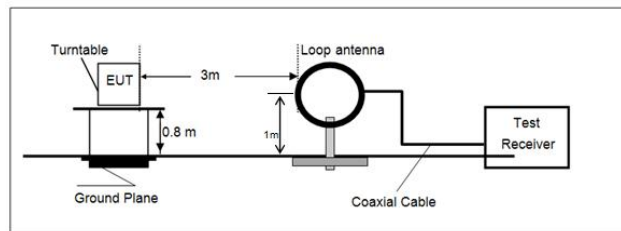

#### 30 MHz ~ 1 GHz

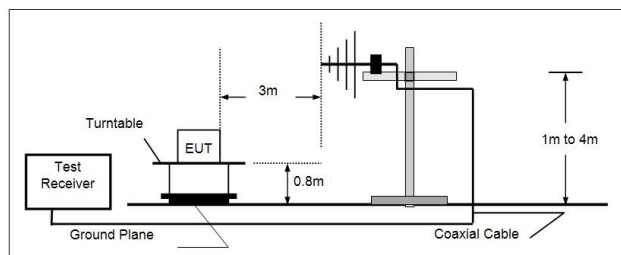

#### Above 1 GHz

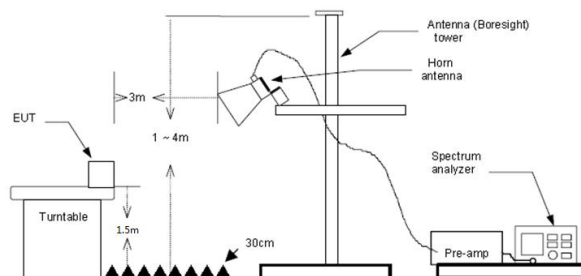

Test procedure:

1. The EUT was setup and tested according to ANSI C63.10.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - a) Span shall wide enough to fully capture the emission being measured;
  - b) Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
  - d) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=Average, Trace=RMS for Average measurement

Test mode:

Refer to the clause 4.2

Result:**Passed**

## Note:

- 1)  $\text{Level} = \text{Reading} + \text{Factor/Transd}$ ;  $\text{Factor/Transd} = \text{Antenna Factor} + \text{Cable Loss} - \text{Preamp Factor}$
- 2)  $\text{Margin} = \text{Limit} - \text{Level}$
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.
- 4) The other emission levels were very low against the limit.
- 5) This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.


**For 9 kHz ~ 30 MHz**

The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

**For 30 MHz ~ 1000 MHz**


Have pre-scan all test channel, found CH00(GFSK-1M) which it was worst case, so only show the worst case's data on this report.

Left

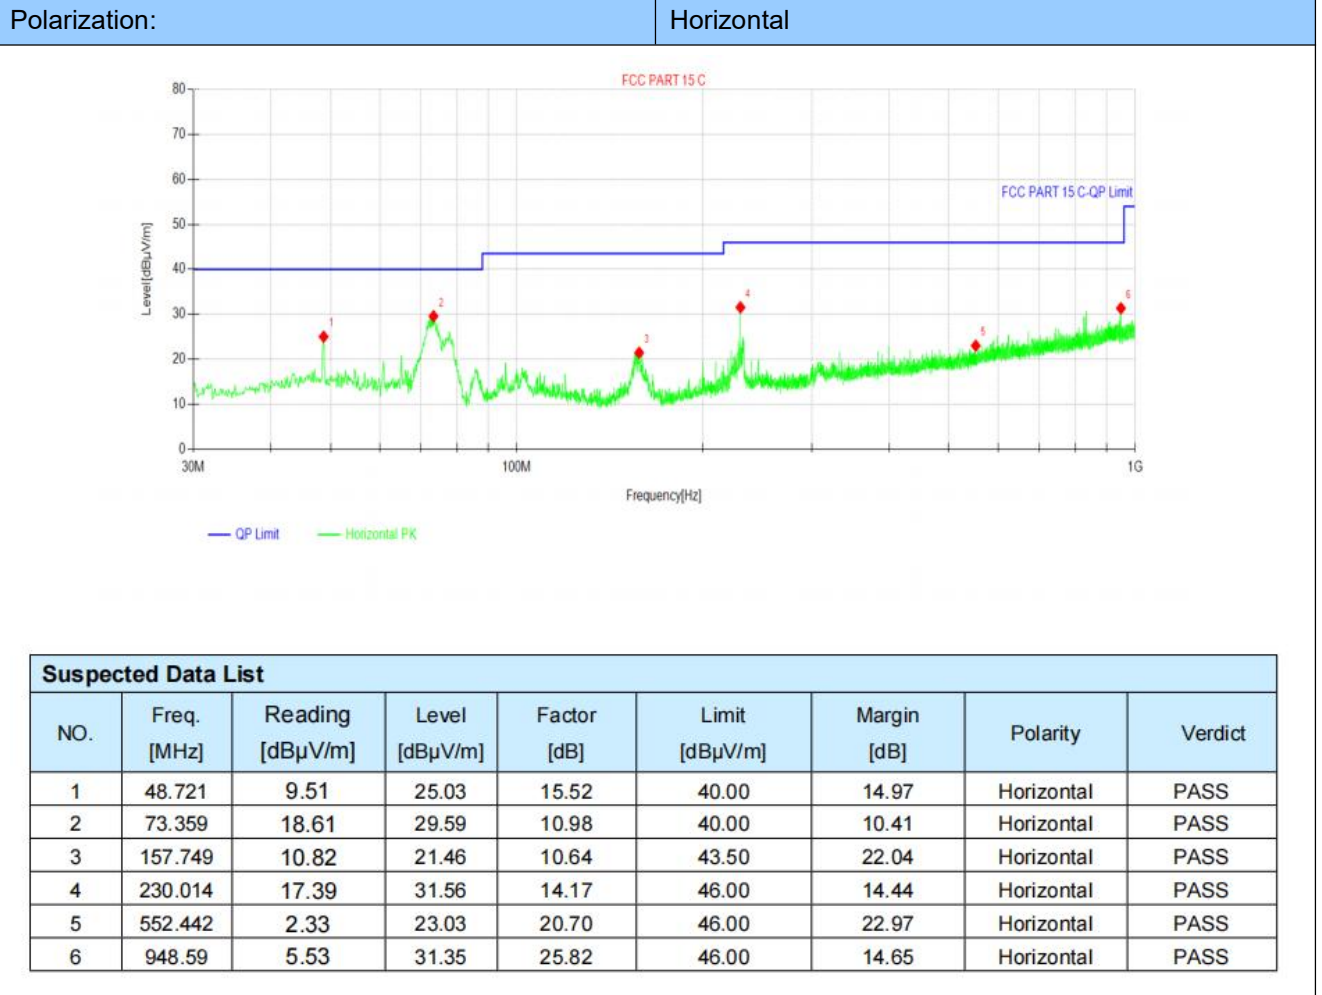

Polarization:

Vertical

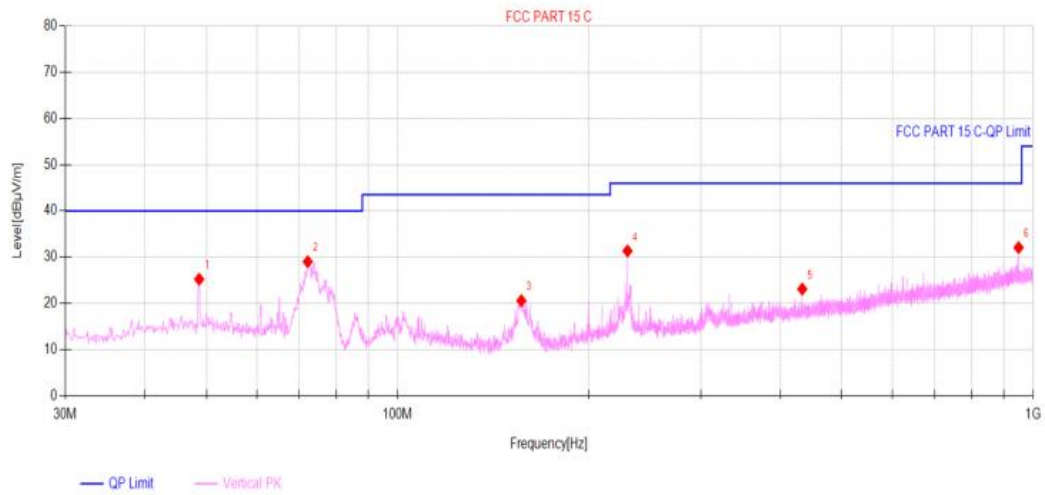

#### Suspected Data List


| NO. | Freq. [MHz] | Reading [dBμV/m] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Polarity | Verdict |
|-----|-------------|------------------|----------------|-------------|----------------|-------------|----------|---------|
| 1   | 48.721      | 9.71             | 25.23          | 15.52       | 40.00          | 14.77       | Vertical | PASS    |
| 2   | 72.195      | 17.82            | 29.03          | 11.21       | 40.00          | 10.97       | Vertical | PASS    |
| 3   | 156.585     | 9.99             | 20.61          | 10.62       | 43.50          | 22.89       | Vertical | PASS    |
| 4   | 230.014     | 17.19            | 31.36          | 14.17       | 46.00          | 14.64       | Vertical | PASS    |
| 5   | 433.229     | 4.73             | 23.12          | 18.39       | 46.00          | 22.88       | Vertical | PASS    |
| 6   | 948.784     | 6.26             | 32.08          | 25.82       | 46.00          | 13.92       | Vertical | PASS    |



Right

Polarization:

Horizontal

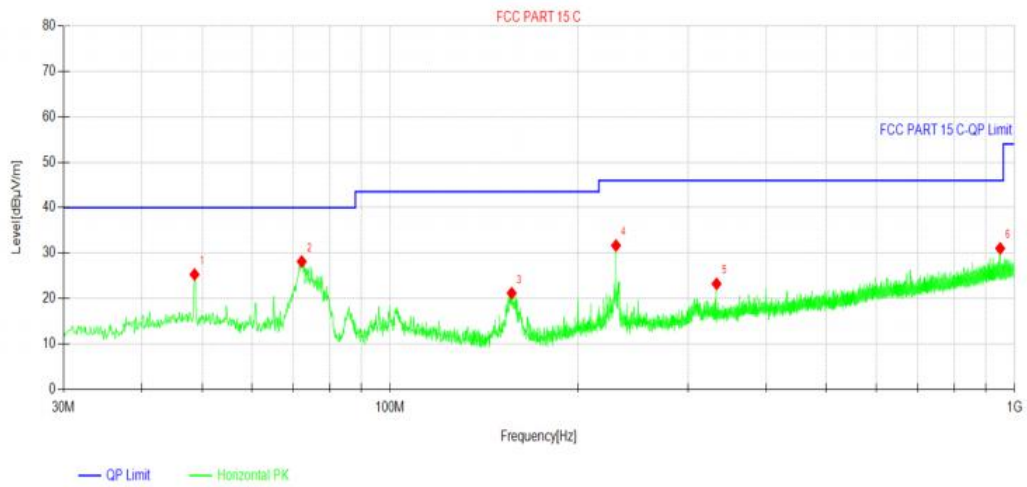


#### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV/m] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Polarity   | Verdict |
|-----|-------------|------------------|----------------|-------------|----------------|-------------|------------|---------|
| 1   | 48.624      | 9.77             | 25.29          | 15.52       | 40.00          | 14.71       | Horizontal | PASS    |
| 2   | 72.195      | 16.93            | 28.14          | 11.21       | 40.00          | 11.86       | Horizontal | PASS    |
| 3   | 156.585     | 10.56            | 21.18          | 10.62       | 43.50          | 22.32       | Horizontal | PASS    |
| 4   | 230.014     | 17.50            | 31.67          | 14.17       | 46.00          | 14.33       | Horizontal | PASS    |
| 5   | 333.319     | 6.48             | 23.23          | 16.75       | 46.00          | 22.77       | Horizontal | PASS    |
| 6   | 948.59      | 5.21             | 31.03          | 25.82       | 46.00          | 14.97       | Horizontal | PASS    |

Polarization:

Vertical

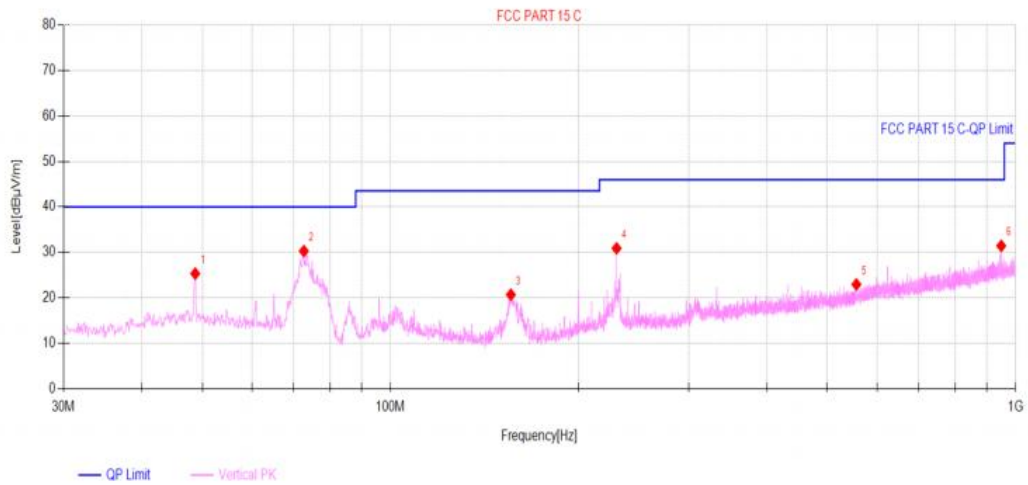

**Suspected Data List**

| NO. | Freq. [MHz] | Reading [dBμV/m] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Polarity | Verdict |
|-----|-------------|------------------|----------------|-------------|----------------|-------------|----------|---------|
| 1   | 48.721      | 9.81             | 25.33          | 15.52       | 40.00          | 14.67       | Vertical | PASS    |
| 2   | 72.68       | 19.18            | 30.29          | 11.11       | 40.00          | 9.71        | Vertical | PASS    |
| 3   | 155.809     | 10.09            | 20.69          | 10.60       | 43.50          | 22.81       | Vertical | PASS    |
| 4   | 230.014     | 16.72            | 30.89          | 14.17       | 46.00          | 15.11       | Vertical | PASS    |
| 5   | 556.419     | 2.15             | 22.95          | 20.80       | 46.00          | 23.05       | Vertical | PASS    |
| 6   | 948.687     | 5.62             | 31.44          | 25.82       | 46.00          | 14.56       | Vertical | PASS    |

# For 1 GHz ~ 25 GHz

Left

| Test channel:CH00 |                |                    |                   |                    |                          |              |                 |             |         |            |
|-------------------|----------------|--------------------|-------------------|--------------------|--------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)       | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 4804.00           | 68.70          | 31.33              | 4.23              | 38.62              | -3.06                    | 65.64        | 74              | 8.36        | Peak    | Horizontal |
| 4804.00           | 50.88          | 31.33              | 4.23              | 38.62              | -3.06                    | 47.82        | 54              | 6.49        | Average | Horizontal |
| 4804.00           | 64.58          | 31.33              | 4.23              | 38.62              | -3.06                    | 61.52        | 74              | 12.34       | Peak    | Vertical   |
| 4804.00           | 50.69          | 31.33              | 4.23              | 38.62              | -3.06                    | 47.63        | 54              | 5.92        | Average | Vertical   |

| Test channel:CH19 |                |                    |                   |                    |                          |              |                 |             |         |            |
|-------------------|----------------|--------------------|-------------------|--------------------|--------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)       | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 4880.00           | 70.04          | 30.26              | 4.09              | 38.29              | -3.94                    | 66.1         | 74              | 7.18        | Peak    | Horizontal |
| 4880.00           | 50.15          | 30.26              | 4.09              | 38.29              | -3.94                    | 46.21        | 54              | 8.18        | Average | Horizontal |
| 4880.00           | 66.75          | 30.26              | 4.09              | 38.29              | -3.94                    | 62.81        | 74              | 11.43       | Peak    | Vertical   |
| 4880.00           | 50.06          | 30.26              | 4.09              | 38.29              | -3.94                    | 46.12        | 54              | 8.87        | Average | Vertical   |

| Test channel:CH39 |                |                    |                   |                    |                          |              |                 |             |         |            |
|-------------------|----------------|--------------------|-------------------|--------------------|--------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)       | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 4960.00           | 63.88          | 31.97              | 4.11              | 38.47              | -2.39                    | 61.49        | 74              | 12.73       | Peak    | Horizontal |
| 4960.00           | 51.71          | 31.97              | 4.11              | 38.47              | -2.39                    | 49.32        | 54              | 7.25        | Average | Horizontal |
| 4960.00           | 66.95          | 31.97              | 4.11              | 38.47              | -2.39                    | 64.56        | 74              | 9.18        | Peak    | Vertical   |
| 4960.00           | 50.66          | 31.97              | 4.11              | 38.47              | -2.39                    | 48.27        | 54              | 7.23        | Average | Vertical   |

Right

| Test channel:CH00 |                |                    |                   |                    |                           |              |                 |             |         |            |
|-------------------|----------------|--------------------|-------------------|--------------------|---------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)       | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correc tion Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 4804.00           | 69.65          | 31.33              | 4.23              | 38.62              | -3.06                     | 66.59        | 74              | 7.41        | Peak    | Horizontal |
| 4804.00           | 49.64          | 31.33              | 4.23              | 38.62              | -3.06                     | 46.58        | 54              | 7.42        | Average | Horizontal |
| 4804.00           | 67.34          | 31.33              | 4.23              | 38.62              | -3.06                     | 64.28        | 74              | 9.72        | Peak    | Vertical   |
| 4804.00           | 49.12          | 31.33              | 4.23              | 38.62              | -3.06                     | 46.06        | 54              | 7.94        | Average | Vertical   |

| Test channel:CH19 |                |                    |                   |                    |                           |              |                 |             |         |            |
|-------------------|----------------|--------------------|-------------------|--------------------|---------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)       | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correc tion Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 4880.00           | 70.71          | 30.26              | 4.09              | 38.29              | -3.94                     | 66.77        | 74              | 7.23        | Peak    | Horizontal |
| 4880.00           | 50.86          | 30.26              | 4.09              | 38.29              | -3.94                     | 46.92        | 54              | 7.08        | Average | Horizontal |
| 4880.00           | 66.78          | 30.26              | 4.09              | 38.29              | -3.94                     | 62.84        | 74              | 11.16       | Peak    | Vertical   |
| 4880.00           | 50.06          | 30.26              | 4.09              | 38.29              | -3.94                     | 46.12        | 54              | 7.88        | Average | Vertical   |


| Test channel:CH39 |                |                    |                   |                    |                           |              |                 |             |         |            |
|-------------------|----------------|--------------------|-------------------|--------------------|---------------------------|--------------|-----------------|-------------|---------|------------|
| Freq. (MHz)       | Reading (dBuv) | Ant. Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correc tion Factor (dB/m) | Level (dBuv) | Limit (dBu V/m) | Margin (dB) | Remark  | Polarity   |
| 4960.00           | 66.05          | 31.97              | 4.11              | 38.47              | -2.39                     | 63.66        | 74              | 10.34       | Peak    | Horizontal |
| 4960.00           | 49.77          | 31.97              | 4.11              | 38.47              | -2.39                     | 47.38        | 54              | 6.62        | Average | Horizontal |
| 4960.00           | 67.03          | 31.97              | 4.11              | 38.47              | -2.39                     | 64.64        | 74              | 9.36        | Peak    | Vertical   |
| 4960.00           | 49.58          | 31.97              | 4.11              | 38.47              | -2.39                     | 47.19        | 54              | 6.81        | Average | Vertical   |

## 5.10. Duty Cycle Correction Factor (DCCF)

Limit:

--

Test configuration:

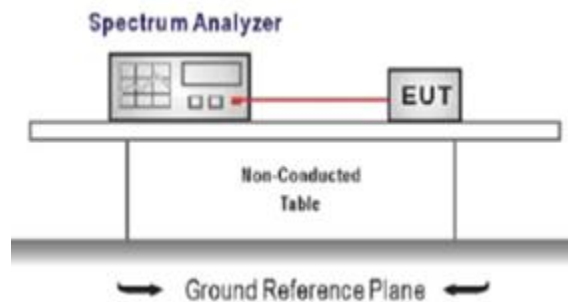

Test procedure:

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel, RBW= 10 MHz,  
VBW  $\geq$  RBW, Sweep = as necessary to capture the entire dwell time channel  
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

Test mode:

Refer to the clause 4.2

Test data:

Refer to the Appendix B

Result:

**Passed**

## **6. TEST SETUP PHOTOS**

Please refer to separated files for Test Setup Photos of the EUT.

## **7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT**

### **7.1 External photos**

Please refer to separated files for External Photos of the EUT.

### **7.2 Internal photos**

Please refer to separated files for Internal Photos of the EUT.

-----End of the report-----