

Radio Test Report

Report No.:STS2410074W02

Issued for

Sunitec Technology CO., Limited

Building C No.725, WeixiangTai Industrial Zone, FuCheng
Street, LongHua District, ShenZhen, Guangdong, China.

Product Name: 2.4GHz communication module

Brand Name: Sunitec

Model Name: SBM.0106

Series Model(s): N/A

FCC ID: 2BHC6RTX1290

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT****Applicant's Name**..... : Sunitec Technology CO., LimitedAddress : Building C No.725, WeixiangTai Industrial Zone, FuCheng Street,
LongHua District, ShenZhen, Guangdong, China.**Manufacturer's Name** : Sunitec Technology CO., LimitedAddress : Building C No.725, WeixiangTai Industrial Zone, FuCheng Street,
LongHua District, ShenZhen, Guangdong, China.**Product Description**

Product Name : 2.4GHz communication module

Brand Name : Sunitec

Model Name : SBM.0106

Series Model(s) : N/A

Test Standards : FCC Part15.247

Test Procedure : ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test..... :

Date of receipt of test item : 17 Oct. 2024

Date (s) of performance of tests..... : 17 Oct. 2024~26 Oct. 2024

Date of Issue..... : 26 Oct. 2024

Test Result..... : **Pass**

Testing Engineer :

(Aaron Bu)

Technical Manager :

(Tony Liu)

Authorized Signatory :

(Bovey Yang)





Table of Contents

1. SUMMARY OF TEST RESULTS	7
1.1 TEST FACTORY	8
1.2 MEASUREMENT UNCERTAINTY	8
2. GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF THE EUT	9
2.2 DESCRIPTION OF THE TEST MODES	11
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.6 EQUIPMENTS LIST	14
3. EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 TEST PROCEDURE	16
3.3 TEST SETUP	16
3.4 EUT OPERATING CONDITIONS	16
3.5 TEST RESULTS	17
4. RADIATED EMISSION MEASUREMENT	19
4.1 RADIATED EMISSION LIMITS	19
4.2 TEST PROCEDURE	21
4.3 TEST SETUP	22
4.4 EUT OPERATING CONDITIONS	22
4.5 FIELD STRENGTH CALCULATION	23
4.6 TEST RESULTS	24
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	37
5.1 LIMIT	37
5.2 TEST PROCEDURE	37
5.3 TEST SETUP	37
5.4 EUT OPERATION CONDITIONS	37
5.5 TEST RESULTS	37
6. POWER SPECTRAL DENSITY TEST	38
6.1 LIMIT	38
6.2 TEST PROCEDURE	38
6.3 TEST SETUP	38



Table of Contents

6.4 EUT OPERATION CONDITIONS	38
6.5 TEST RESULTS	38
7. BANDWIDTH TEST	39
7.1 LIMIT	39
7.2 TEST PROCEDURE	39
7.3 TEST SETUP	39
7.4 EUT OPERATION CONDITIONS	39
7.5 TEST RESULTS	39
8. PEAK OUTPUT POWER TEST	40
8.1 LIMIT	40
8.2 TEST PROCEDURE	40
8.3 TEST SETUP	41
8.4 EUT OPERATION CONDITIONS	41
8.5 TEST RESULTS	41
9. ANTENNA REQUIREMENT	42
9.1 STANDARD REQUIREMENT	42
9.2 EUT ANTENNA	42
APPENDIX 1-TEST DATA	43
ANT 1	43
1. DUTY CYCLE	43
2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER	46
3. MAXIMUM PEAK CONDUCTED OUTPUT POWER	49
4. -6DB BANDWIDTH	52
6. MAXIMUM POWER SPECTRAL DENSITY LEVEL	55
7. BAND EDGE	58
8. CONDUCTED RF SPURIOUS EMISSION	61
ANT 2	65
1. DUTY CYCLE	65
2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER	68
3. MAXIMUM PEAK CONDUCTED OUTPUT POWER	71



Table of Contents

4. -6DB BANDWIDTH	74
6. MAXIMUM POWER SPECTRAL DENSITY LEVEL	77
7. BAND EDGE	80
8. CONDUCTED RF SPURIOUS EMISSION	83
APPENDIX 2- EUT TEST PHOTO	87



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	26 Oct. 2024	STS2410074W02	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-20120.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	2.4GHz communication module	
Brand Name	Sunitec	
Model Name	SBM.0106	
Series Model(s)	N/A	
Model Difference	N/A	
Product Description	The EUT is a 2.4GHz communication module	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Number Of Channel:	79
	Antenna Type:	FPC
	Antenna Gain (dBi)	2.82
Channel List	Please refer to the Note 3.	
Rating	Input: DC 3.3V	
Hardware version number	V0.2	
Software version number	V00716	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.
3. Antenna Information

ANT Specific	Manufacturer	Model Name	Cable Length	Gain (c
1	Shenzhen Sixun Communication Technology Co., Ltd	MTS.0201W0001	150mm	2.82
2	Shenzhen Sixun Communication Technology Co., Ltd	MTS.0201W0001	300mm	2.82



4.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions
Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	GFSK
Mode 2	TX CH39(2441MHz)	GFSK
Mode 3	TX CH78(2480MHz)	GFSK

Note:

(1) We tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/ 60Hz is shown in the report.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4 : Keeping TX


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
SRD	2.4G(ANT1)	GFSK	2.82	Default	Sheridan1290_1tx_stereo_v0064
	2.4G(ANT2)	GFSK	2.82	Default	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

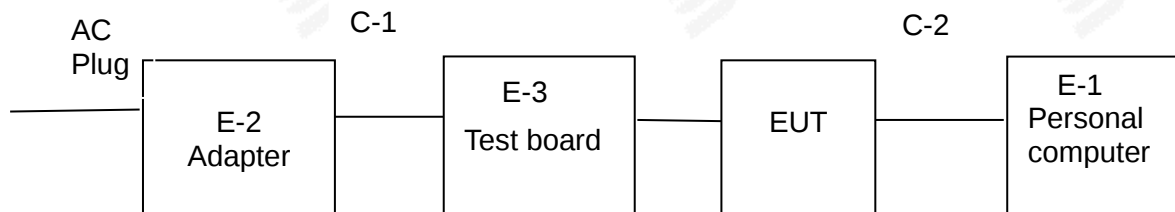

Conducted Emission Test

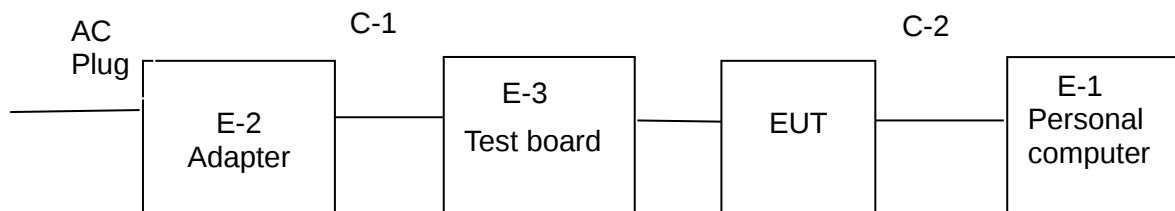

2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-1	Personal computer	DELL	Inspiron 3501	N/A	N/A
E-2	Adapter	ZTC	NB-A515A	N/A	N/A
E-3	Test board	Sunitec	SBM.0106	N/A	N/A
C-1	USB Cable	ZTC	NB-A515A	150cm	N/A
C-2	USB Serial port Cable	Sunitec	SBM.0106	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2024.02.23	2025.02.22
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2024.09.23	2025.09.22
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2024.02.23	2025.02.22
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2025.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2024.09.30	2025.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2024.09.23	2025.09.22
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2024.09.23	2025.09.22
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2024.09.24	2025.09.23
Limtter	CYBERTEK	EM5010	N/A	2024.09.24	2025.09.23
LISN	R&S	ENV216	101242	2024.09.24	2025.09.23
LISN	EMCO	3810/2NM	23625	2024.09.24	2025.09.23
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2024.02.23	2025.02.22
Power Sensor	Keysight	U2021XA	MY56120038	2024.09.23	2025.09.22
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Test SW	MW	MTS 8310_2.0.0.0			

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

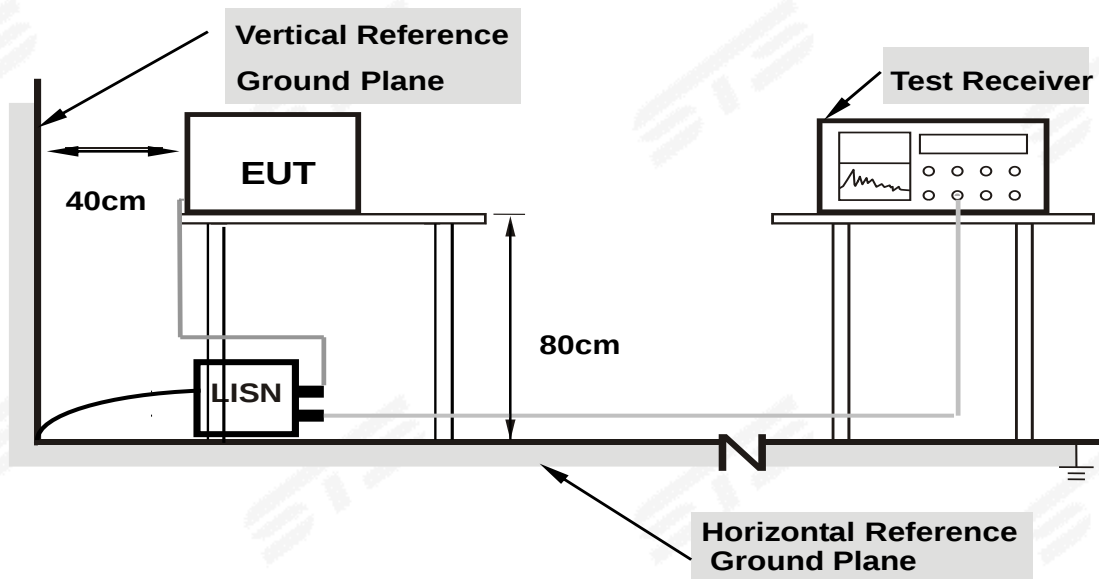

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.5 TEST RESULTS


Temperature:	25.1℃	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5460	16.66	19.97	36.63	56.00	-19.37	QP
2	0.5460	4.80	19.97	24.77	46.00	-21.23	AVG
3	1.0900	18.13	19.77	37.90	56.00	-18.10	QP
4	1.0900	10.99	19.77	30.76	46.00	-15.24	AVG
5	1.7700	13.79	19.78	33.57	56.00	-22.43	QP
6	1.7700	6.06	19.78	25.84	46.00	-20.16	AVG
7	3.6700	19.30	19.83	39.13	56.00	-16.87	QP
8	3.6700	9.94	19.83	29.77	46.00	-16.23	AVG
9	4.7580	24.01	19.83	43.84	56.00	-12.16	QP
10	4.7580	13.71	19.83	33.54	46.00	-12.46	AVG
11	18.1700	22.40	20.48	42.88	60.00	-17.12	QP
12	18.1700	5.10	20.48	25.58	50.00	-24.42	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor)–Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

100.0 dBuV

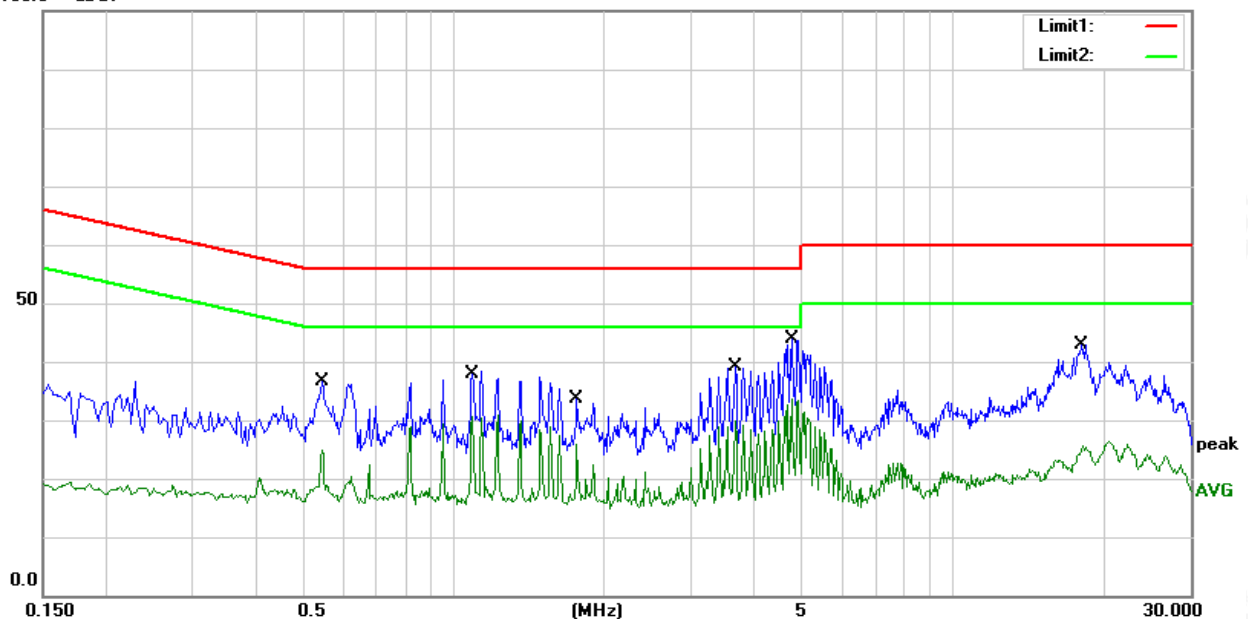




Temperature:	25.1 °C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.6180	17.51	19.89	37.40	56.00	-18.60	QP
2	0.6180	3.75	19.89	23.64	46.00	-22.36	AVG
3	0.9540	14.52	19.78	34.30	56.00	-21.70	QP
4	0.9540	3.93	19.78	23.71	46.00	-22.29	AVG
5	1.3620	14.35	19.81	34.16	56.00	-21.84	QP
6	1.3620	3.55	19.81	23.36	46.00	-22.64	AVG
7	3.5380	15.96	19.94	35.90	56.00	-20.10	QP
8	3.5380	4.04	19.94	23.98	46.00	-22.02	AVG
9	4.8980	20.24	19.90	40.14	56.00	-15.86	QP
10	4.8980	7.55	19.90	27.45	46.00	-18.55	AVG
11	17.9340	18.67	20.41	39.08	60.00	-20.92	QP
12	17.9340	1.69	20.41	22.10	50.00	-27.90	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

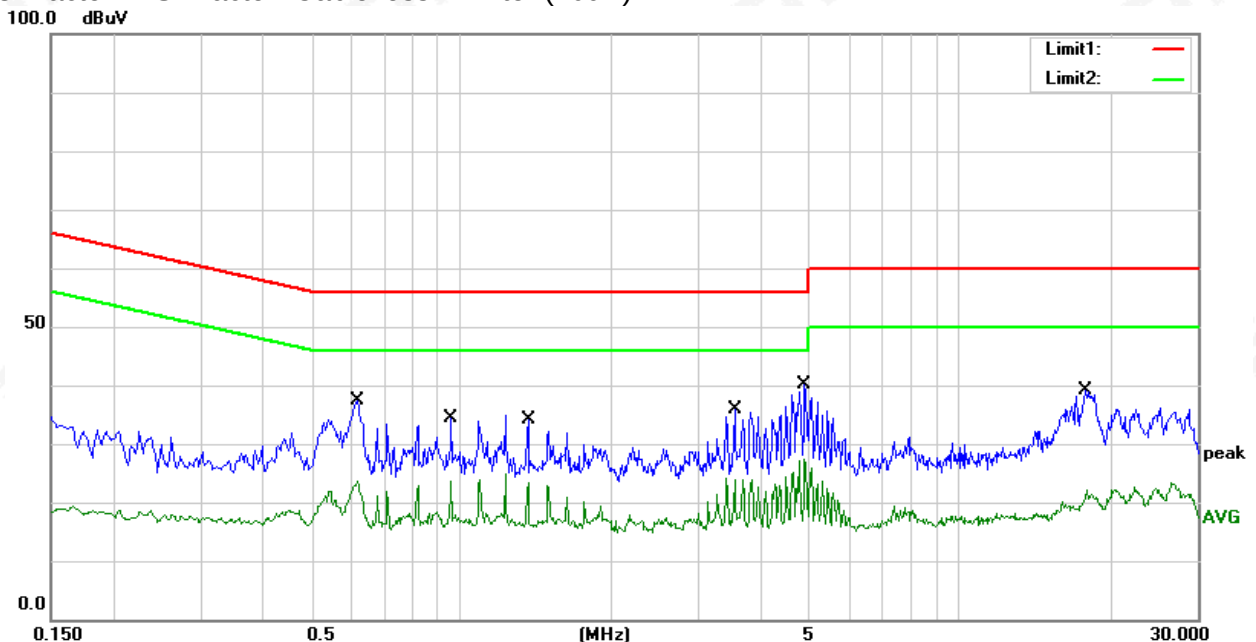



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

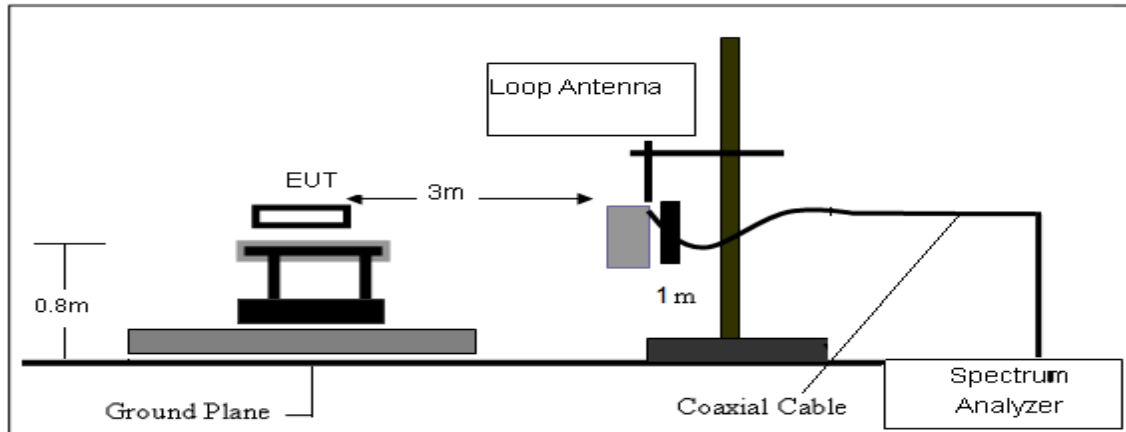

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

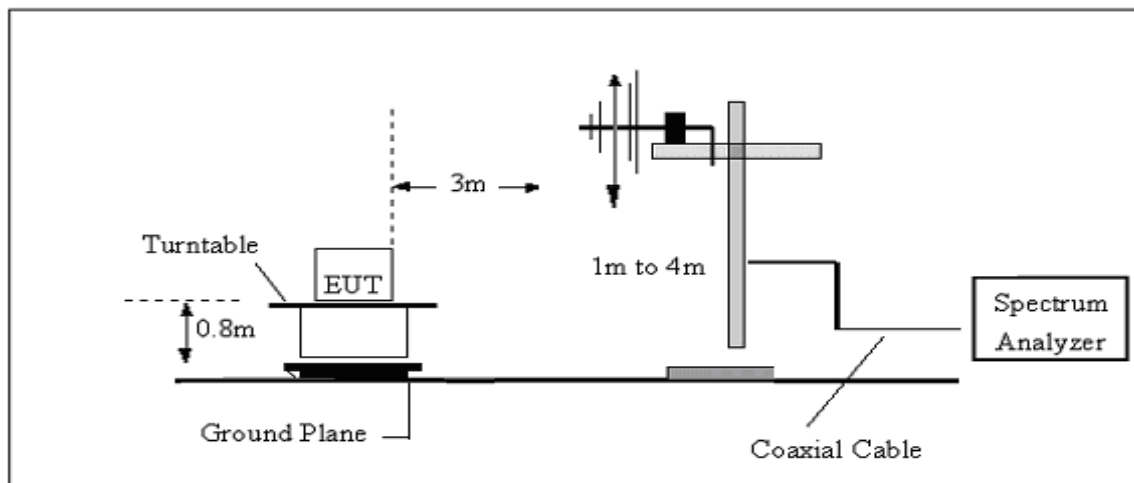

(C) Radiated Emission Test-Up Frequency Above 1GHz

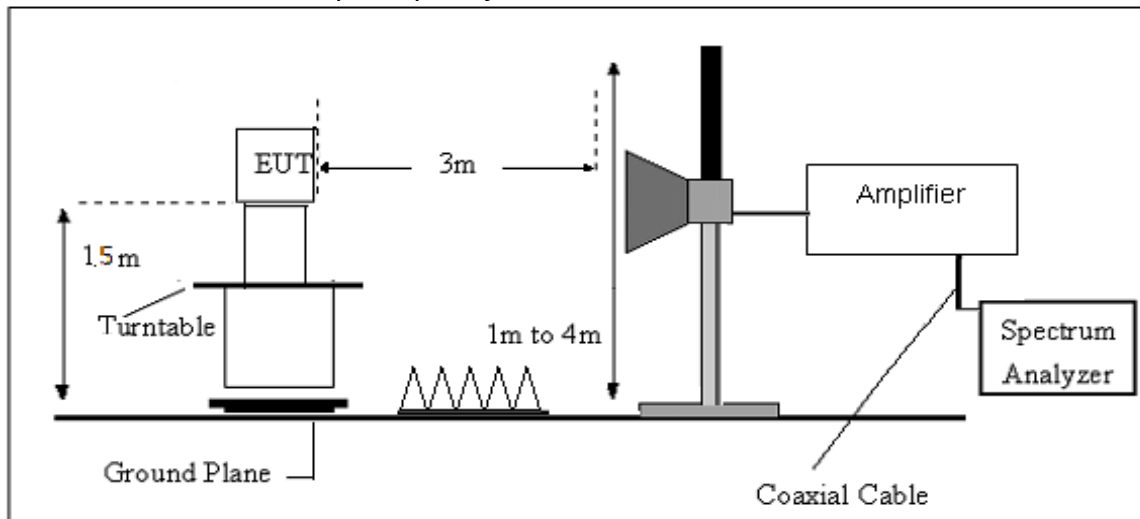

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$



4.6 TEST RESULTS

(Between 9KHz – 30 MHz)

Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Polarization:	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



(30MHz -1000MHz)

Ant1


Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 2 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	38.32	-14.33	23.99	40.00	-16.01	peak
2	198.7800	57.64	-21.12	36.52	43.50	-6.98	peak
3	257.9500	49.15	-15.02	34.13	46.00	-11.87	peak
4	374.3500	51.84	-12.39	39.45	46.00	-6.55	peak
5	579.9900	41.46	-5.76	35.70	46.00	-10.30	peak
6	749.7400	41.47	-2.16	39.31	46.00	-6.69	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

80.0 dBuV/m

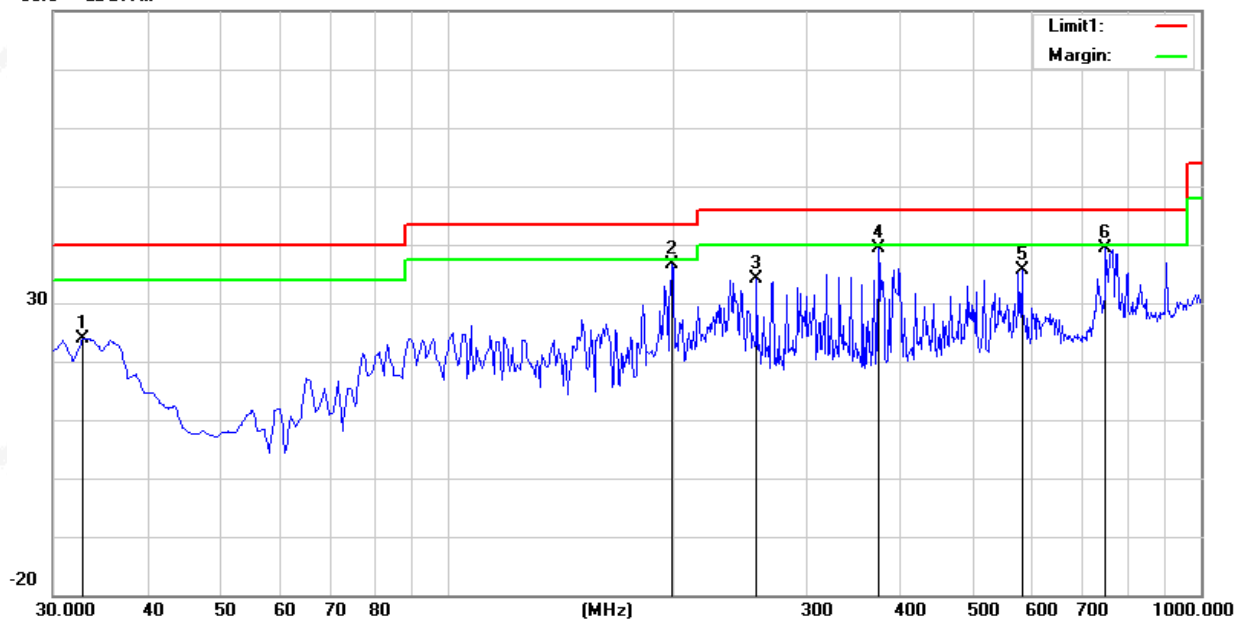




Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 2 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	49.19	-15.91	33.28	40.00	-6.72	peak
2	198.7800	57.90	-21.12	36.78	43.50	-6.72	peak
3	257.9500	46.53	-15.02	31.51	46.00	-14.49	peak
4	374.3500	48.23	-12.39	35.84	46.00	-10.16	peak
5	515.9700	40.96	-7.87	33.09	46.00	-12.91	peak
6	755.5600	41.27	-2.17	39.10	46.00	-6.90	peak

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

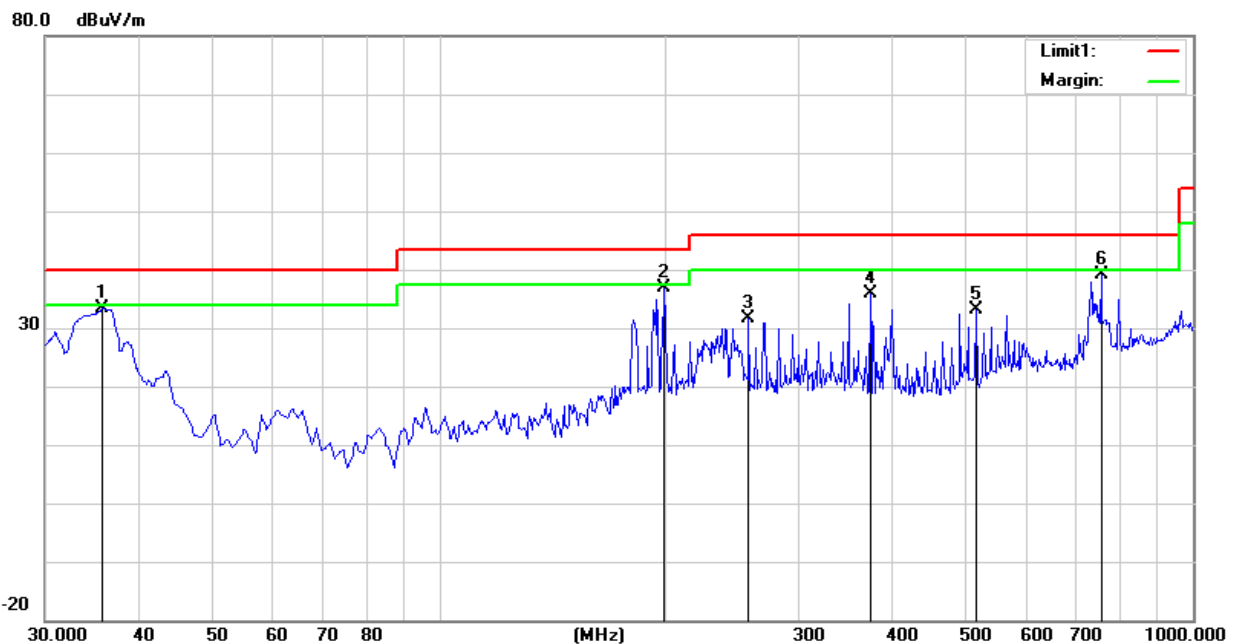



Ant 2


Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	38.39	-13.35	25.04	40.00	-14.96	peak
2	95.9600	46.31	-20.67	25.64	43.50	-17.86	peak
3	194.9000	57.76	-21.14	36.62	43.50	-6.88	peak
4	390.8400	47.29	-11.54	35.75	46.00	-10.25	peak
5	581.9300	42.90	-5.78	37.12	46.00	-8.88	peak
6	749.7400	41.23	-2.16	39.07	46.00	-6.93	peak

Remark:

- Margin = Result (Result = Reading + Factor) – Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
- All modes have been tested,only show the worst case.

80.0 dBuV/m

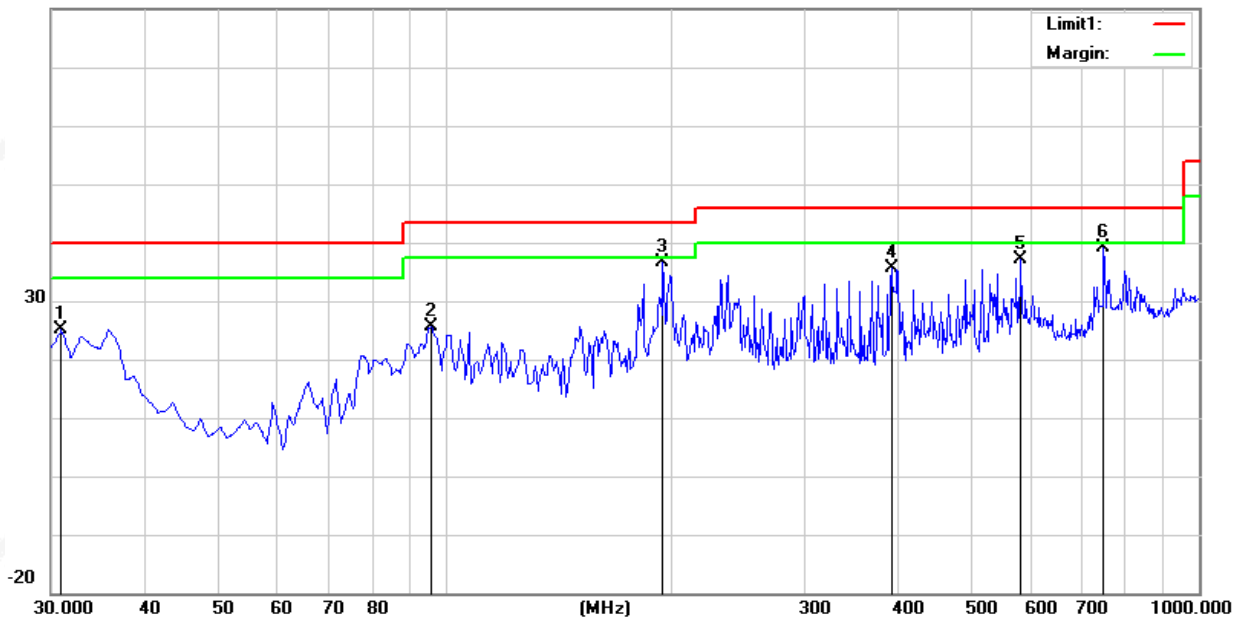




Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	48.72	-15.91	32.81	40.00	-7.19	peak
2	199.7500	57.92	-21.11	36.81	43.50	-6.69	peak
3	238.5500	52.48	-18.23	34.25	46.00	-11.75	peak
4	399.5700	44.25	-11.16	33.09	46.00	-12.91	peak
5	608.1200	36.24	-5.56	30.68	46.00	-15.32	peak
6	758.4700	41.39	-2.17	39.22	46.00	-6.78	peak

Remark:

- Margin = Result (Result = Reading + Factor) – Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain
- All modes have been tested, only show the worst case.

80.0 dBuV/m

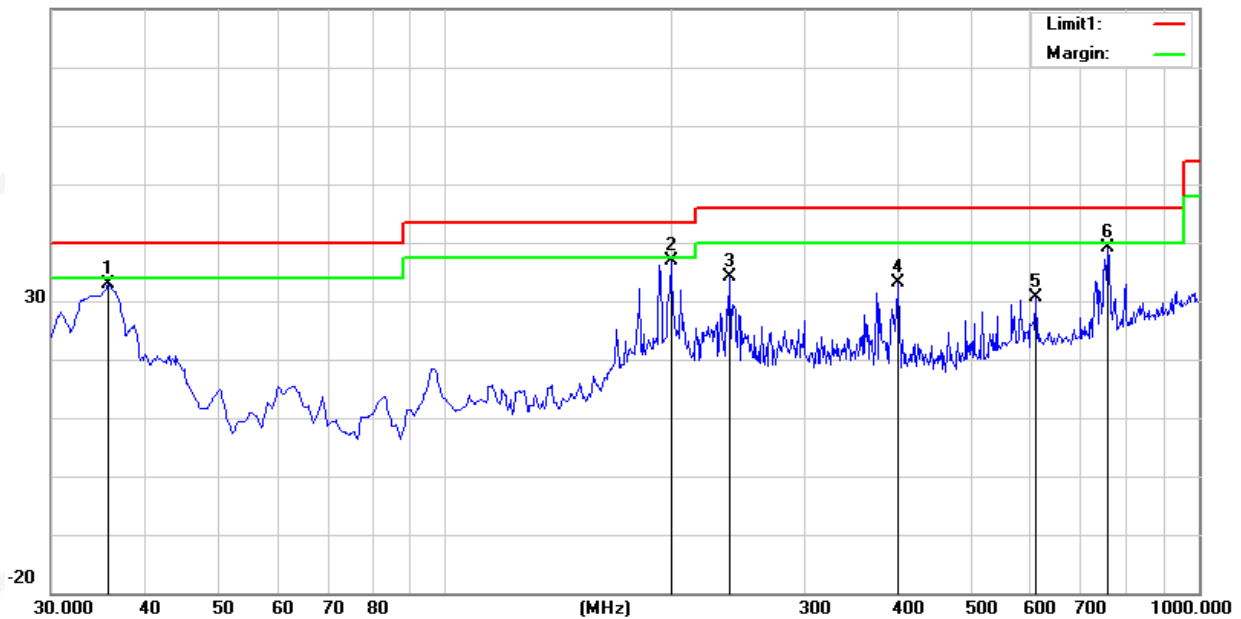



(1GHz-25GHz) Spurious emission Requirements

Ant 1

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (GFSK/2402 MHz)										
3264.69	60.92	44.70	6.70	28.20	-9.80	51.12	74.00	-22.88	PK	Vertical
3264.69	51.71	44.70	6.70	28.20	-9.80	41.91	54.00	-12.09	AV	Vertical
3264.77	61.00	44.70	6.70	28.20	-9.80	51.20	74.00	-22.80	PK	Horizontal
3264.77	50.21	44.70	6.70	28.20	-9.80	40.41	54.00	-13.59	AV	Horizontal
4804.29	58.82	44.20	9.04	31.60	-3.56	55.26	74.00	-18.74	PK	Vertical
4804.29	49.69	44.20	9.04	31.60	-3.56	46.13	54.00	-7.87	AV	Vertical
4804.60	58.49	44.20	9.04	31.60	-3.56	54.93	74.00	-19.07	PK	Horizontal
4804.60	49.44	44.20	9.04	31.60	-3.56	45.88	54.00	-8.12	AV	Horizontal
5359.85	49.12	44.20	9.86	32.00	-2.34	46.78	74.00	-27.22	PK	Vertical
5359.85	40.16	44.20	9.86	32.00	-2.34	37.82	54.00	-16.18	AV	Vertical
5359.70	47.41	44.20	9.86	32.00	-2.34	45.07	74.00	-28.93	PK	Horizontal
5359.70	38.48	44.20	9.86	32.00	-2.34	36.14	54.00	-17.86	AV	Horizontal
7205.72	53.93	43.50	11.40	35.50	3.40	57.33	74.00	-16.67	PK	Vertical
7205.72	43.65	43.50	11.40	35.50	3.40	47.05	54.00	-6.95	AV	Vertical
7205.70	54.88	43.50	11.40	35.50	3.40	58.28	74.00	-15.72	PK	Horizontal
7205.70	44.62	43.50	11.40	35.50	3.40	48.02	54.00	-5.98	AV	Horizontal
Middle Channel (GFSK/2441 MHz)										
3263.09	61.65	44.70	6.70	28.20	-9.80	51.85	74.00	-22.15	PK	Vertical
3263.09	51.28	44.70	6.70	28.20	-9.80	41.48	54.00	-12.52	AV	Vertical
3263.16	61.86	44.70	6.70	28.20	-9.80	52.06	74.00	-21.94	PK	Horizontal
3263.16	50.67	44.70	6.70	28.20	-9.80	40.87	54.00	-13.13	AV	Horizontal
4880.07	58.45	44.20	9.04	31.60	-3.56	54.89	74.00	-19.11	PK	Vertical
4880.07	50.18	44.20	9.04	31.60	-3.56	46.62	54.00	-7.38	AV	Vertical
4880.00	59.61	44.20	9.04	31.60	-3.56	56.05	74.00	-17.95	PK	Horizontal
4880.00	49.45	44.20	9.04	31.60	-3.56	45.89	54.00	-8.11	AV	Horizontal
5357.09	48.57	44.20	9.86	32.00	-2.34	46.23	74.00	-27.77	PK	Vertical
5357.09	39.36	44.20	9.86	32.00	-2.34	37.02	54.00	-16.98	AV	Vertical
5357.39	47.98	44.20	9.86	32.00	-2.34	45.64	74.00	-28.36	PK	Horizontal
5357.01	38.05	44.20	9.86	32.00	-2.34	35.71	54.00	-18.29	AV	Horizontal
7320.85	54.88	43.50	11.40	35.50	3.40	58.28	74.00	-15.72	PK	Vertical
7320.85	44.30	43.50	11.40	35.50	3.40	47.70	54.00	-6.30	AV	Vertical
7320.51	54.78	43.50	11.40	35.50	3.40	58.18	74.00	-15.82	PK	Horizontal
7320.51	43.54	43.50	11.40	35.50	3.40	46.94	54.00	-7.06	AV	Horizontal



High Channel (GFSK/2480 MHz)										
3264.86	60.96	44.70	6.70	28.20	-9.80	51.16	74.00	-22.84	PK	Vertical
3264.86	51.09	44.70	6.70	28.20	-9.80	41.29	54.00	-12.71	AV	Vertical
3264.56	61.51	44.70	6.70	28.20	-9.80	51.71	74.00	-22.29	PK	Horizontal
3264.56	50.97	44.70	6.70	28.20	-9.80	41.17	54.00	-12.83	AV	Horizontal
4960.50	59.31	44.20	9.04	31.60	-3.56	55.75	74.00	-18.25	PK	Vertical
4960.50	49.42	44.20	9.04	31.60	-3.56	45.86	54.00	-8.14	AV	Vertical
4960.41	58.31	44.20	9.04	31.60	-3.56	54.75	74.00	-19.25	PK	Horizontal
4960.41	49.65	44.20	9.04	31.60	-3.56	46.09	54.00	-7.91	AV	Horizontal
5359.74	48.38	44.20	9.86	32.00	-2.34	46.04	74.00	-27.96	PK	Vertical
5359.74	39.25	44.20	9.86	32.00	-2.34	36.91	54.00	-17.09	AV	Vertical
5359.65	47.29	44.20	9.86	32.00	-2.34	44.95	74.00	-29.05	PK	Horizontal
5359.65	39.13	44.20	9.86	32.00	-2.34	36.79	54.00	-17.21	AV	Horizontal
7439.69	54.04	43.50	11.40	35.50	3.40	57.44	74.00	-16.56	PK	Vertical
7439.69	44.95	43.50	11.40	35.50	3.40	48.35	54.00	-5.65	AV	Vertical
7439.81	54.75	43.50	11.40	35.50	3.40	58.15	74.00	-15.85	PK	Horizontal
7439.81	44.09	43.50	11.40	35.50	3.40	47.49	54.00	-6.51	AV	Horizontal

Note:

1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



Ant 2

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (GFSK/2402 MHz)										
3264.64	61.95	44.70	6.70	28.20	-9.80	52.15	74.00	-21.85	PK	Vertical
3264.64	50.01	44.70	6.70	28.20	-9.80	40.21	54.00	-13.79	AV	Vertical
3264.84	61.29	44.70	6.70	28.20	-9.80	51.49	74.00	-22.51	PK	Horizontal
3264.84	51.05	44.70	6.70	28.20	-9.80	41.25	54.00	-12.75	AV	Horizontal
4804.56	58.37	44.20	9.04	31.60	-3.56	54.81	74.00	-19.19	PK	Vertical
4804.56	49.69	44.20	9.04	31.60	-3.56	46.13	54.00	-7.87	AV	Vertical
4804.32	59.46	44.20	9.04	31.60	-3.56	55.90	74.00	-18.10	PK	Horizontal
4804.32	50.17	44.20	9.04	31.60	-3.56	46.61	54.00	-7.39	AV	Horizontal
5359.82	48.30	44.20	9.86	32.00	-2.34	45.96	74.00	-28.04	PK	Vertical
5359.82	39.49	44.20	9.86	32.00	-2.34	37.15	54.00	-16.85	AV	Vertical
5359.73	47.70	44.20	9.86	32.00	-2.34	45.36	74.00	-28.64	PK	Horizontal
5359.73	38.21	44.20	9.86	32.00	-2.34	35.87	54.00	-18.13	AV	Horizontal
7205.69	54.45	43.50	11.40	35.50	3.40	57.85	74.00	-16.15	PK	Vertical
7205.69	44.16	43.50	11.40	35.50	3.40	47.56	54.00	-6.44	AV	Vertical
7205.91	53.77	43.50	11.40	35.50	3.40	57.17	74.00	-16.83	PK	Horizontal
7205.91	44.52	43.50	11.40	35.50	3.40	47.92	54.00	-6.08	AV	Horizontal
Middle Channel (GFSK/2441 MHz)										
3263.00	60.91	44.70	6.70	28.20	-9.80	51.11	74.00	-22.89	PK	Vertical
3263.00	51.52	44.70	6.70	28.20	-9.80	41.72	54.00	-12.28	AV	Vertical
3263.06	61.75	44.70	6.70	28.20	-9.80	51.95	74.00	-22.05	PK	Horizontal
3263.06	50.77	44.70	6.70	28.20	-9.80	40.97	54.00	-13.03	AV	Horizontal
4880.13	59.14	44.20	9.04	31.60	-3.56	55.58	74.00	-18.42	PK	Vertical
4880.13	49.67	44.20	9.04	31.60	-3.56	46.11	54.00	-7.89	AV	Vertical
4880.17	58.31	44.20	9.04	31.60	-3.56	54.75	74.00	-19.25	PK	Horizontal
4880.17	49.97	44.20	9.04	31.60	-3.56	46.41	54.00	-7.59	AV	Horizontal
5357.29	49.25	44.20	9.86	32.00	-2.34	46.91	74.00	-27.09	PK	Vertical
5357.29	39.25	44.20	9.86	32.00	-2.34	36.91	54.00	-17.09	AV	Vertical
5357.39	48.46	44.20	9.86	32.00	-2.34	46.12	74.00	-27.88	PK	Horizontal
5356.96	39.44	44.20	9.86	32.00	-2.34	37.10	54.00	-16.90	AV	Horizontal
7320.85	54.53	43.50	11.40	35.50	3.40	57.93	74.00	-16.07	PK	Vertical
7320.85	44.17	43.50	11.40	35.50	3.40	47.57	54.00	-6.43	AV	Vertical
7320.43	54.13	43.50	11.40	35.50	3.40	57.53	74.00	-16.47	PK	Horizontal
7320.43	43.82	43.50	11.40	35.50	3.40	47.22	54.00	-6.78	AV	Horizontal



High Channel (GFSK/2480 MHz)										
3264.88	60.99	44.70	6.70	28.20	-9.80	51.19	74.00	-22.81	PK	Vertical
3264.88	50.27	44.70	6.70	28.20	-9.80	40.47	54.00	-13.53	AV	Vertical
3264.83	60.78	44.70	6.70	28.20	-9.80	50.98	74.00	-23.02	PK	Horizontal
3264.83	50.42	44.70	6.70	28.20	-9.80	40.62	54.00	-13.38	AV	Horizontal
4960.40	58.24	44.20	9.04	31.60	-3.56	54.68	74.00	-19.32	PK	Vertical
4960.40	49.37	44.20	9.04	31.60	-3.56	45.81	54.00	-8.19	AV	Vertical
4960.37	58.27	44.20	9.04	31.60	-3.56	54.71	74.00	-19.29	PK	Horizontal
4960.37	50.06	44.20	9.04	31.60	-3.56	46.50	54.00	-7.50	AV	Horizontal
5359.88	49.13	44.20	9.86	32.00	-2.34	46.79	74.00	-27.21	PK	Vertical
5359.88	39.88	44.20	9.86	32.00	-2.34	37.54	54.00	-16.46	AV	Vertical
5359.86	47.47	44.20	9.86	32.00	-2.34	45.13	74.00	-28.87	PK	Horizontal
5359.86	39.42	44.20	9.86	32.00	-2.34	37.08	54.00	-16.92	AV	Horizontal
7439.79	54.26	43.50	11.40	35.50	3.40	57.66	74.00	-16.34	PK	Vertical
7439.79	44.00	43.50	11.40	35.50	3.40	47.40	54.00	-6.60	AV	Vertical
7439.91	54.95	43.50	11.40	35.50	3.40	58.35	74.00	-15.65	PK	Horizontal
7439.91	44.29	43.50	11.40	35.50	3.40	47.69	54.00	-6.31	AV	Horizontal

Note:


1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.


4.6 TEST RESULTS (Restricted Bands Requirements)

Ant 1 GFSK-Low Horizontal

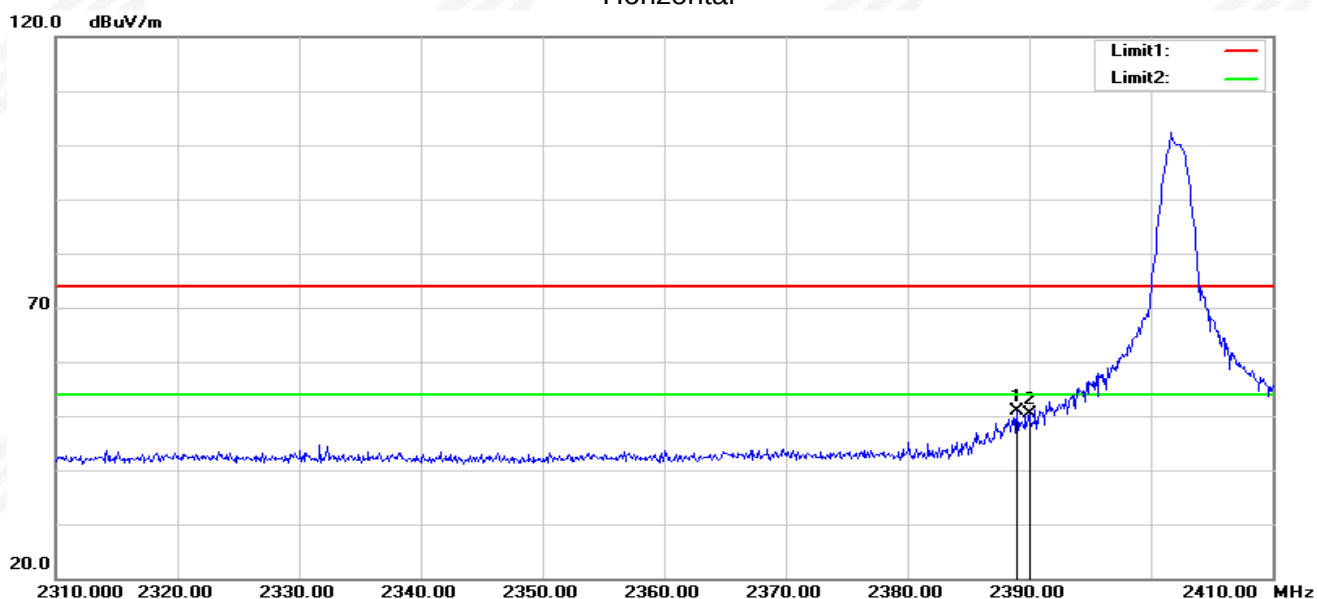


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.000	46.68	4.32	51.00	74.00	-23.00	peak
2	2390.000	46.06	4.34	50.40	74.00	-23.60	peak

Vertical

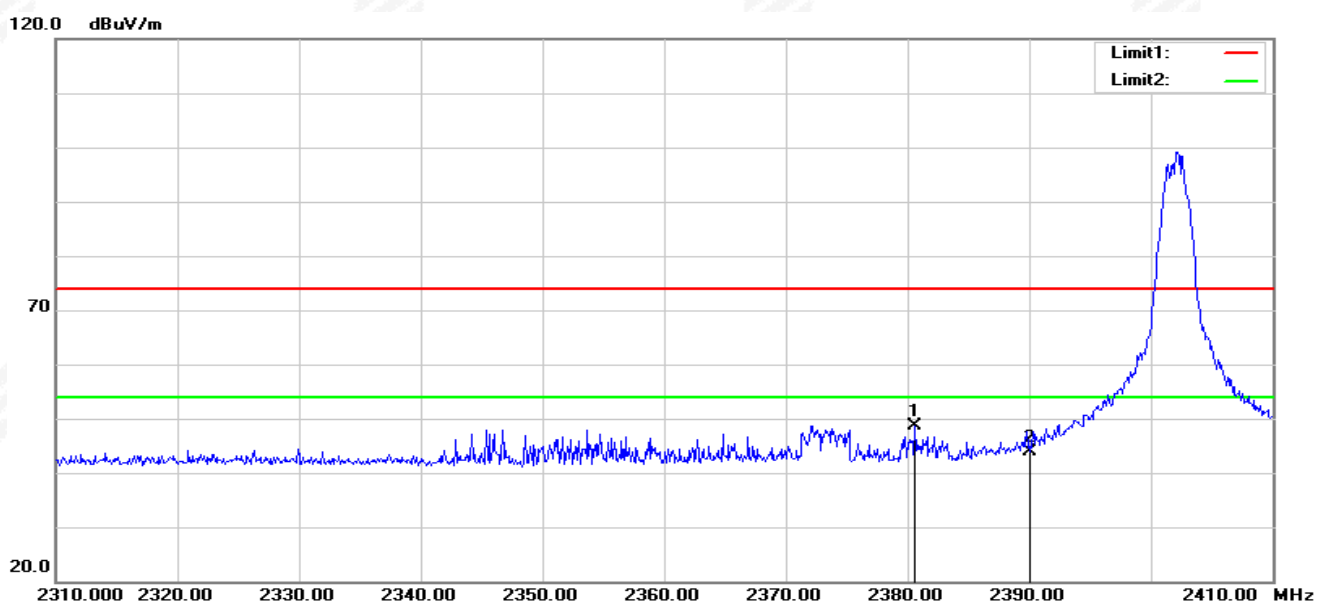


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.600	44.55	4.19	48.74	74.00	-25.26	peak
2	2390.000	39.65	4.34	43.99	74.00	-30.01	peak

GFSK-High Horizontal

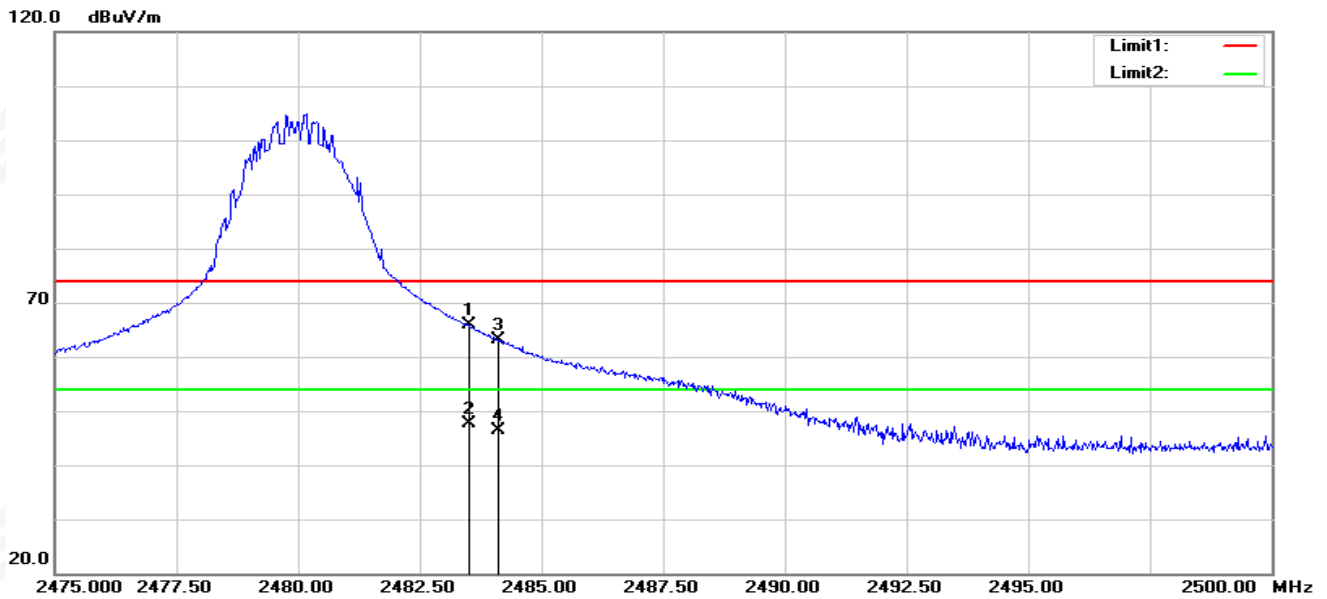


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.24	4.60	65.84	74.00	-8.16	peak
2	2483.500	42.94	4.60	47.54	54.00	-6.46	AVG
3	2484.100	58.50	4.61	63.11	74.00	-10.89	peak
4	2484.100	41.88	4.61	46.49	54.00	-7.51	AVG

Vertical

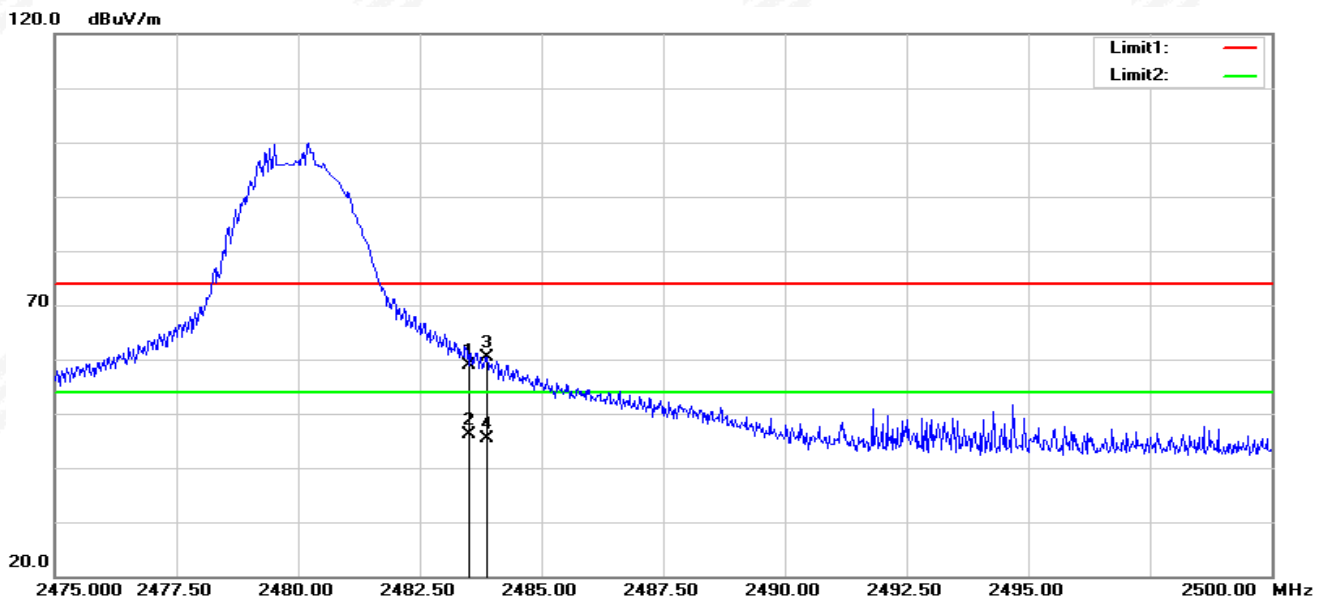


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.32	4.60	58.92	74.00	-15.08	peak
2	2483.500	41.52	4.60	46.12	54.00	-7.88	AVG
3	2483.875	55.78	4.61	60.39	74.00	-13.61	peak
4	2483.875	40.83	4.61	45.44	54.00	-8.56	AVG

Ant 2 GFSK-Low Horizontal

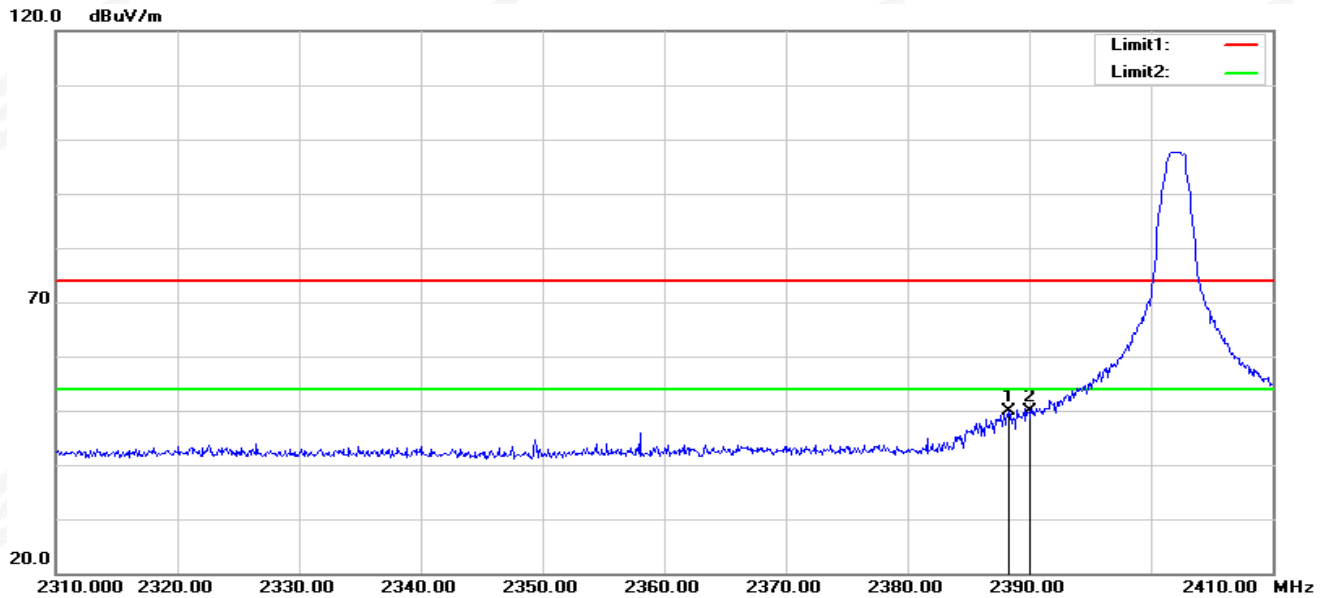


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.300	45.67	4.31	49.98	74.00	-24.02	peak
2	2390.000	45.63	4.34	49.97	74.00	-24.03	peak

Vertical

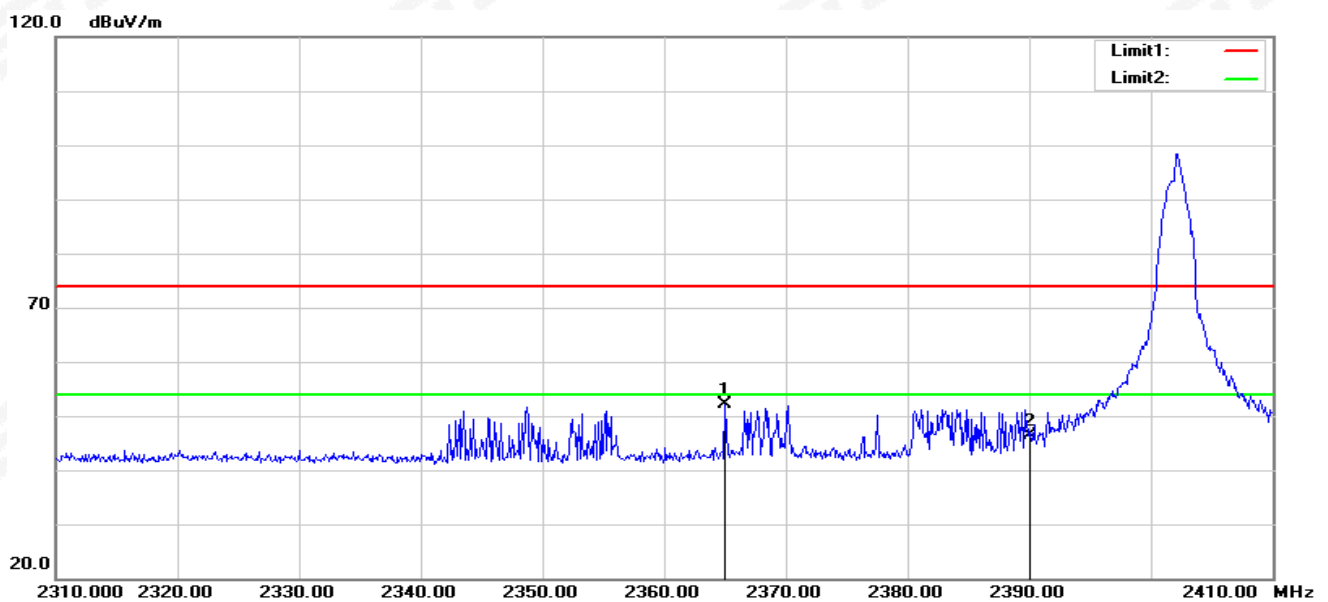


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.000	48.27	3.96	52.23	74.00	-21.77	peak
2	2390.000	42.10	4.34	46.44	74.00	-27.56	peak

GFSK-High Horizontal

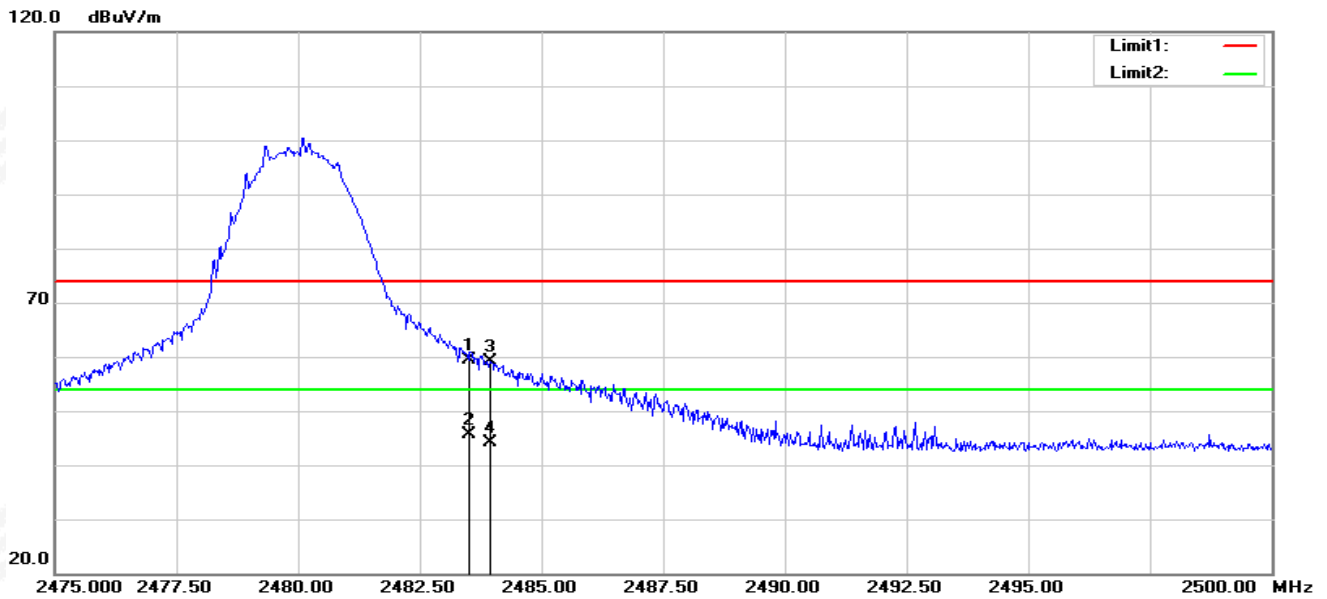

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.72	4.60	59.32	74.00	-14.68	peak
2	2483.500	41.01	4.60	45.61	54.00	-8.39	AVG
3	2483.950	54.56	4.61	59.17	74.00	-14.83	peak
4	2483.950	39.42	4.61	44.03	54.00	-9.97	AVG

Vertical

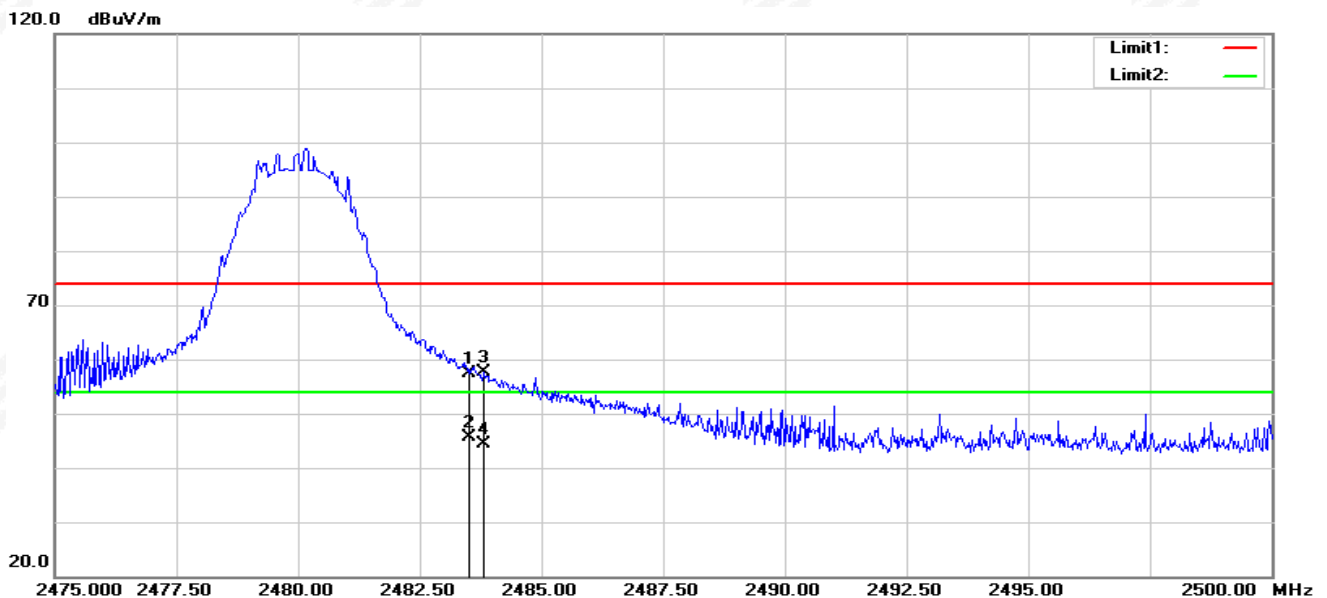

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.87	4.60	57.47	74.00	-16.53	peak
2	2483.500	41.04	4.60	45.64	54.00	-8.36	AVG
3	2483.825	53.05	4.61	57.66	74.00	-16.34	peak
4	2483.825	39.71	4.61	44.32	54.00	-9.68	AVG

5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

5.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminals is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

5.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

6. POWER SPECTRAL DENSITY TEST

6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8 \text{ dBm}$ ($\text{RBW} \geq 3 \text{ KHz}$)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

6.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

7. BANDWIDTH TEST

7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

7.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



8. PEAK OUTPUT POWER TEST

8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

One of the following procedures may be used to determine the averaging conducted output power of a DTS EUT.

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- Measure the duty cycle D of the transmitter output signal as described in 11.6.
- Set span to at least 1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- Do not use sweep triggering. Allow the sweep to "free run."
- Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

$\text{RBW} \geq \text{DTS bandwidth}$

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Set span $\geq [3 \times \text{RBW}]$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the


DTS bandwidth:

- a) Set the RBW = 1 MHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

8.3 TEST SETUP

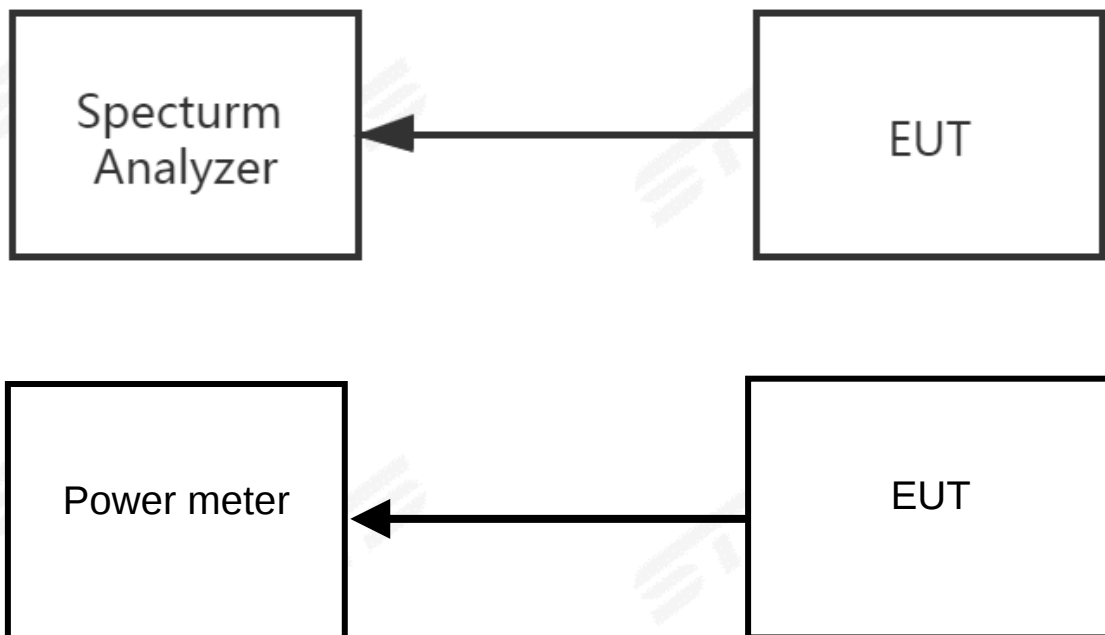

8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

8.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.




APPENDIX 1-TEST DATA


Ant 1**1. Duty Cycle**


Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	2.4G	2402	85.45	0.68	0.67
NVNT	2.4G	2441	85.59	0.68	0.67
NVNT	2.4G	2480	85.62	0.67	0.67

Test Graphs

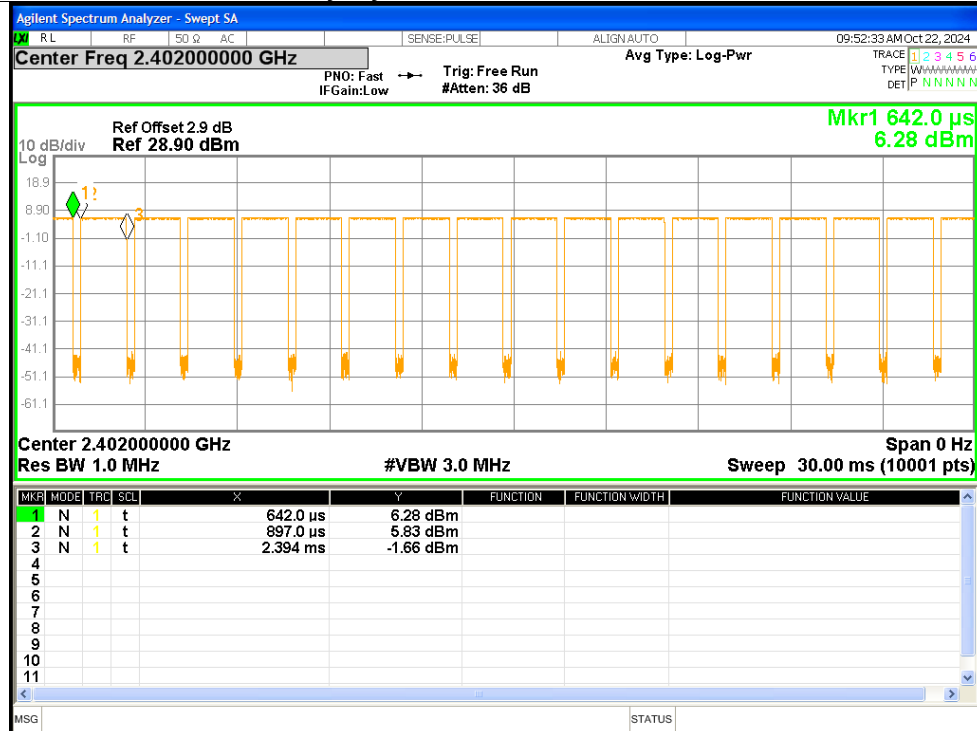

Duty Cycle NVNT 2.4G 2441MHz

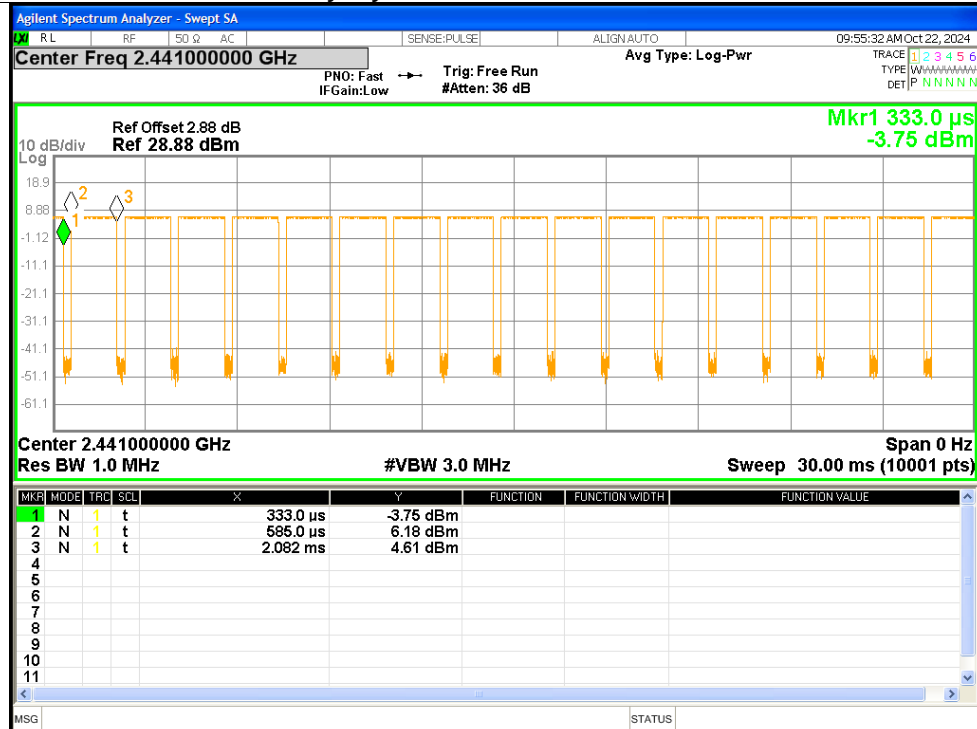

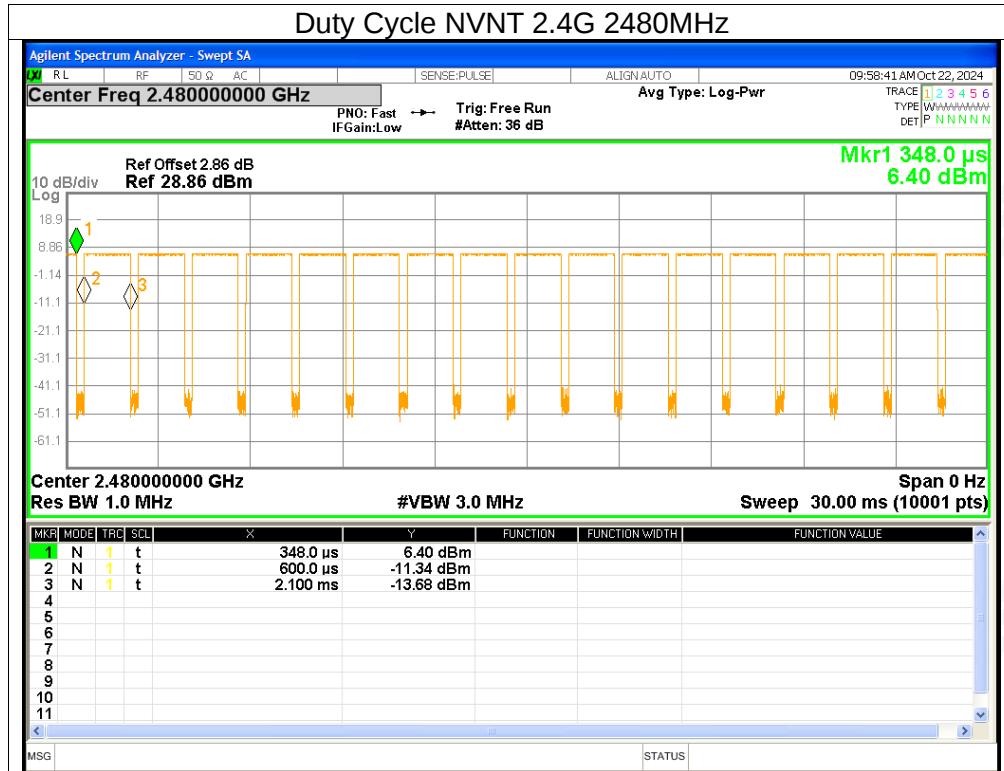




2. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2402	5.52	0.68	6.2	≤ 30	Pass
NVNT	2.4G	2441	5.92	0.68	6.6	≤ 30	Pass
NVNT	2.4G	2480	5.87	0.67	6.54	≤ 30	Pass





Test Graphs

Average Power NVNT 2.4G 2402MHz

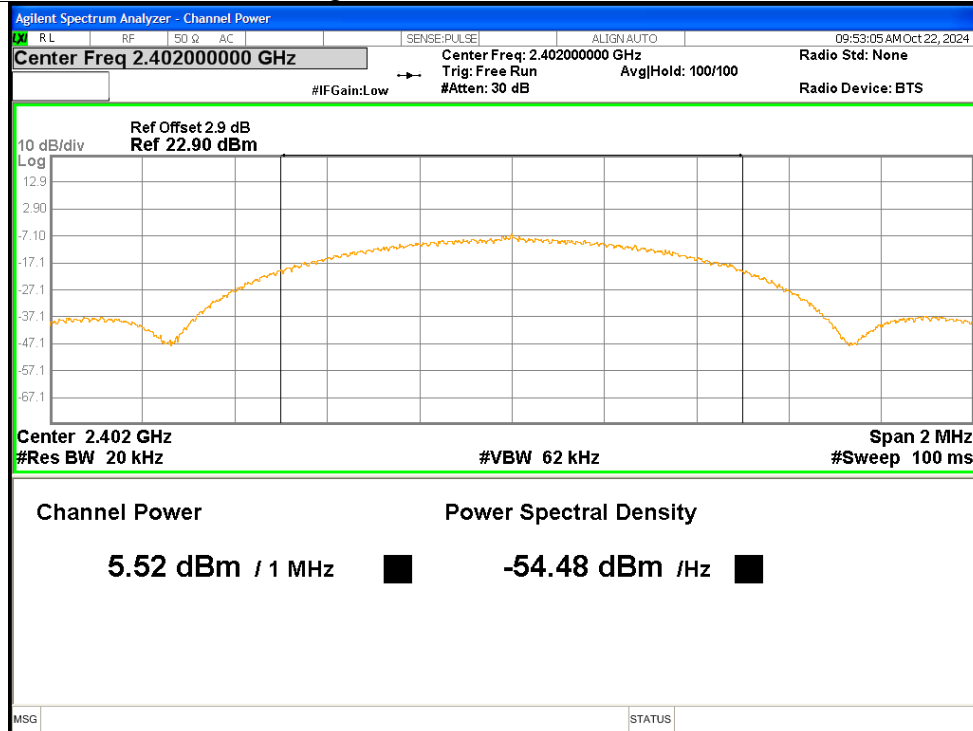

Average Power NVNT 2.4G 2441MHz

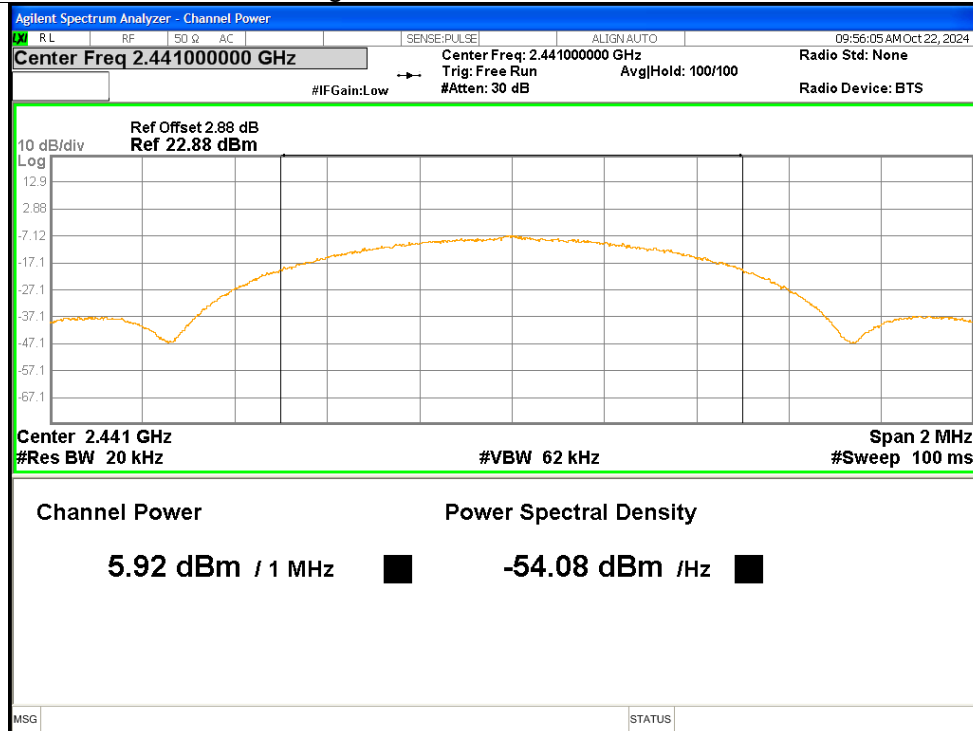

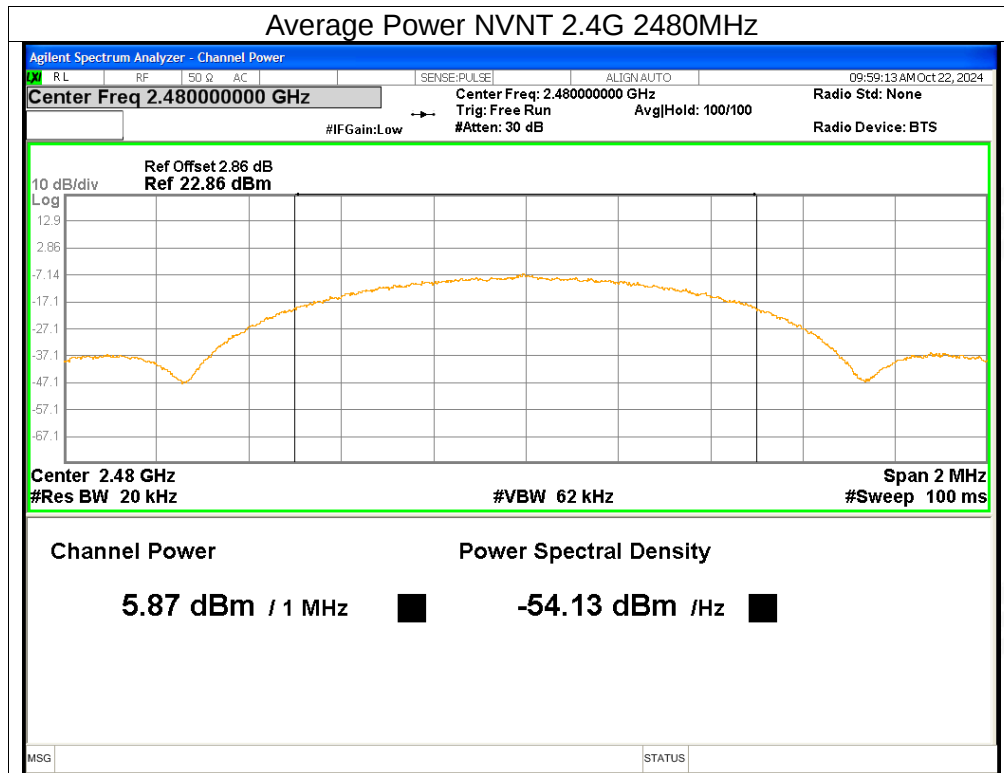




3. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2402	6.34	<=30	Pass
NVNT	2.4G	2441	6.7	<=30	Pass
NVNT	2.4G	2480	6.69	<=30	Pass





Test Graphs

Peak Power NVNT 2.4G 2402MHz

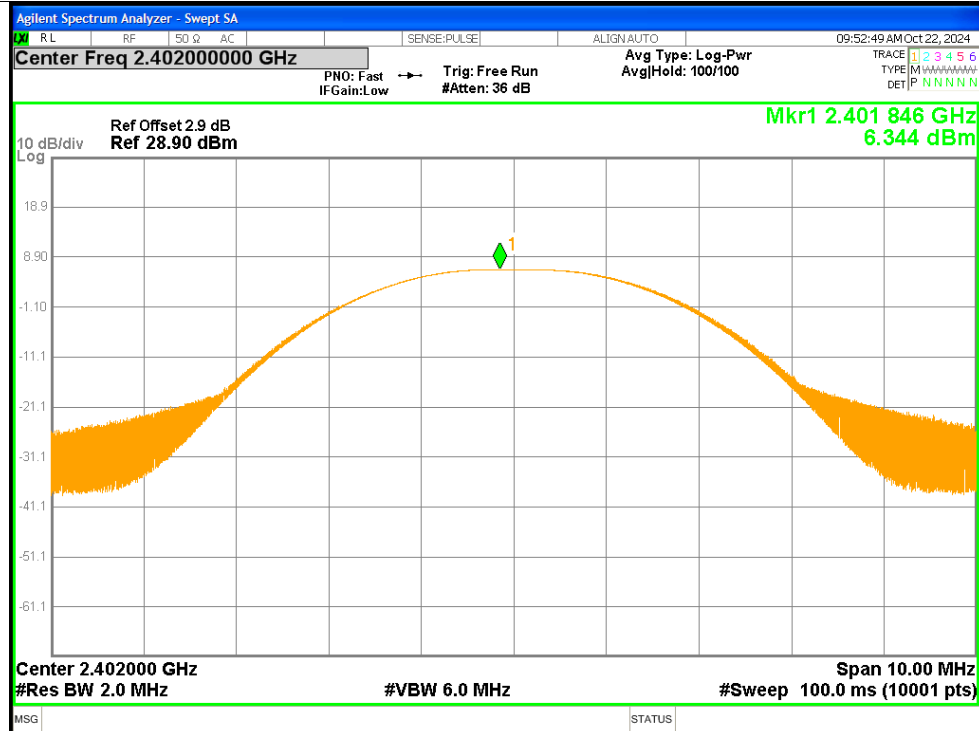

Peak Power NVNT 2.4G 2441MHz

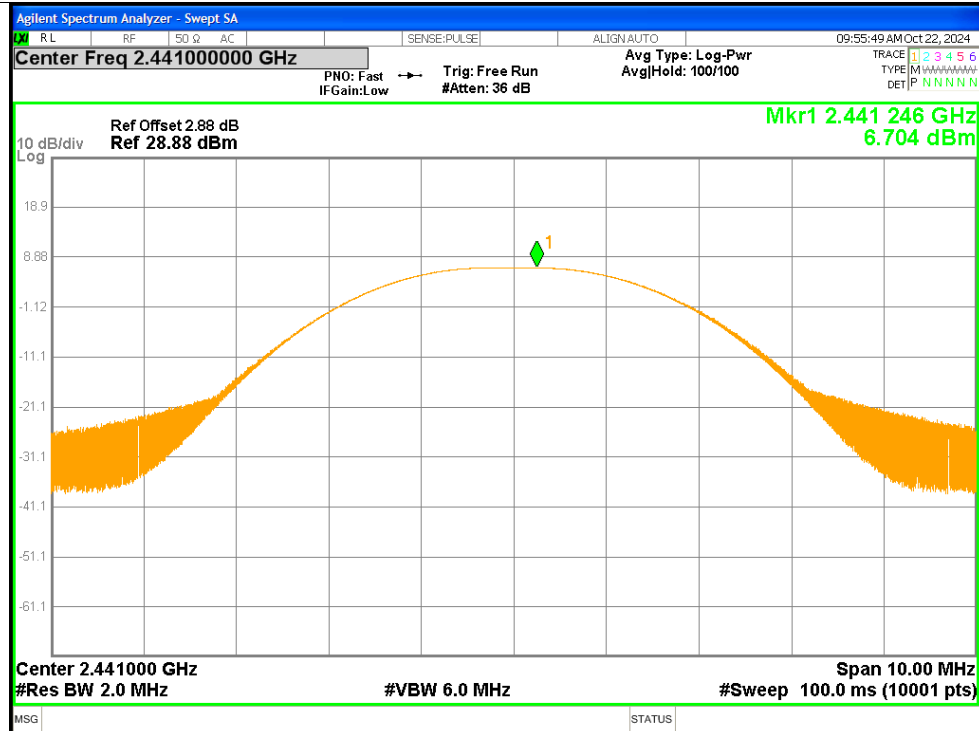

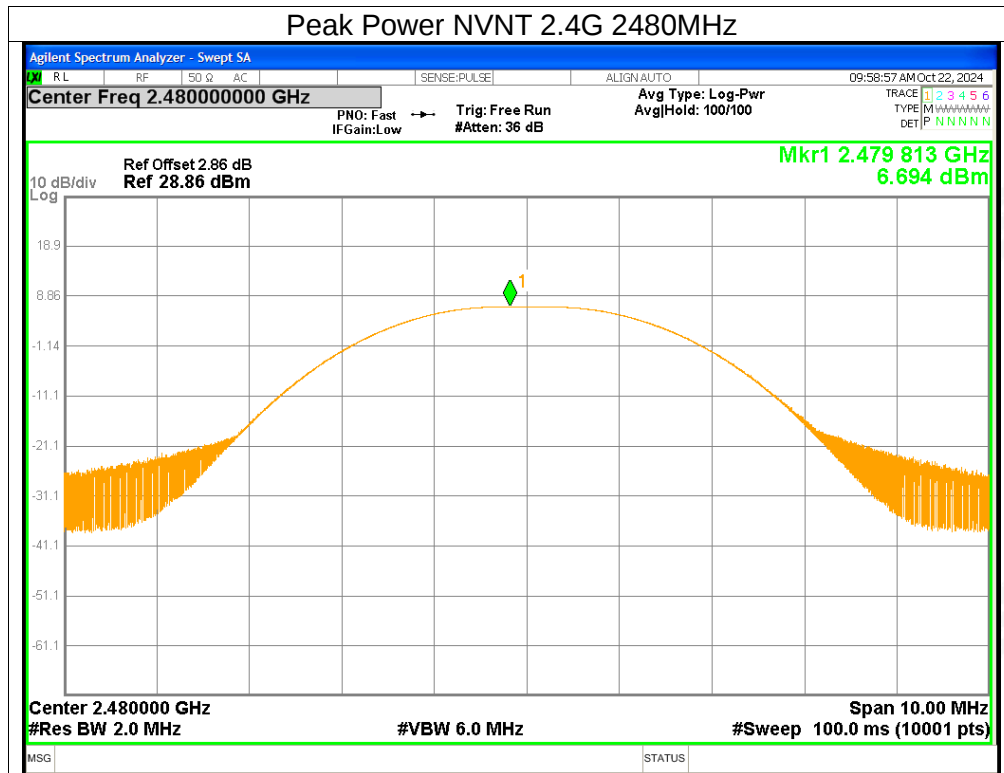




4. -6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	2.4G	2402	0.6968	≥ 0.5	Pass
NVNT	2.4G	2441	0.7129	≥ 0.5	Pass
NVNT	2.4G	2480	0.7115	≥ 0.5	Pass





Test Graphs

-6dB Bandwidth NVNT 2.4G 2402MHz

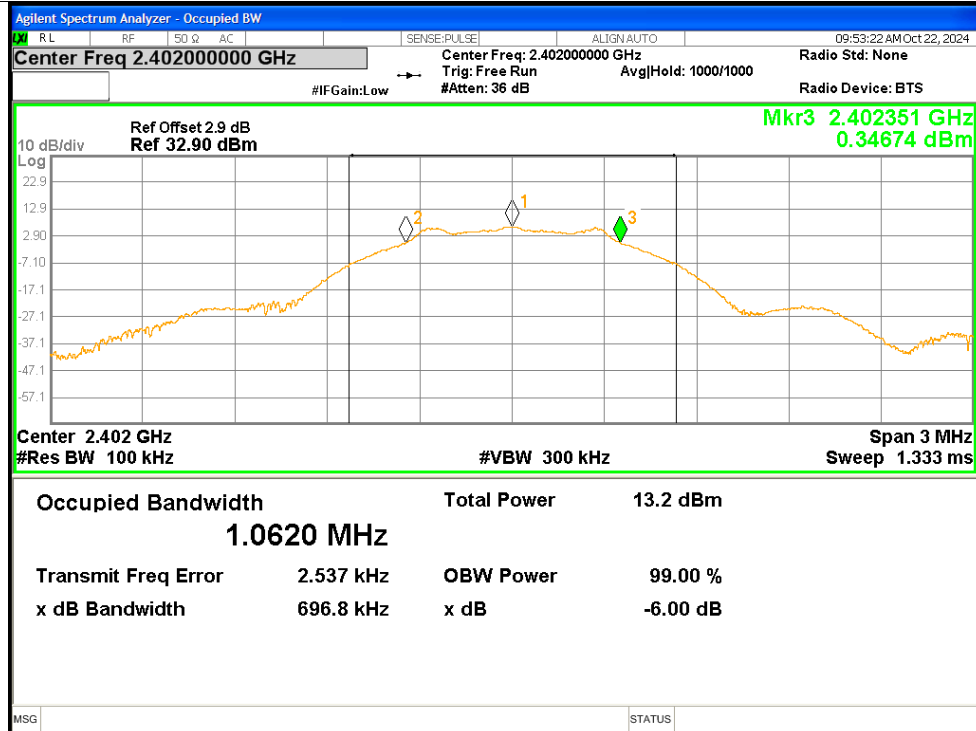

-6dB Bandwidth NVNT 2.4G 2441MHz

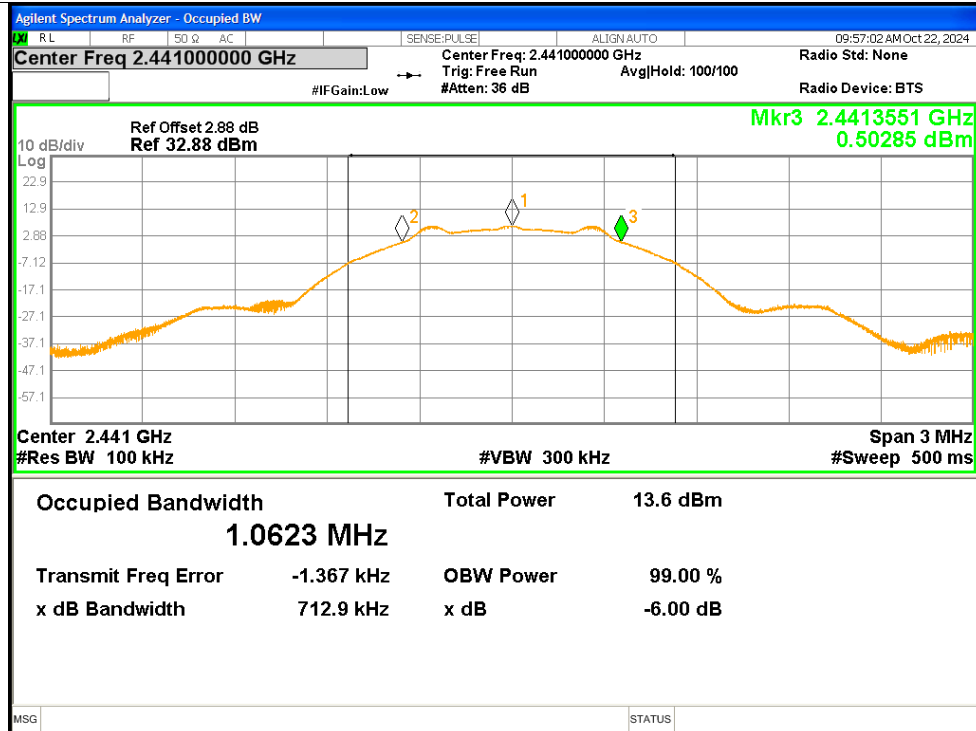

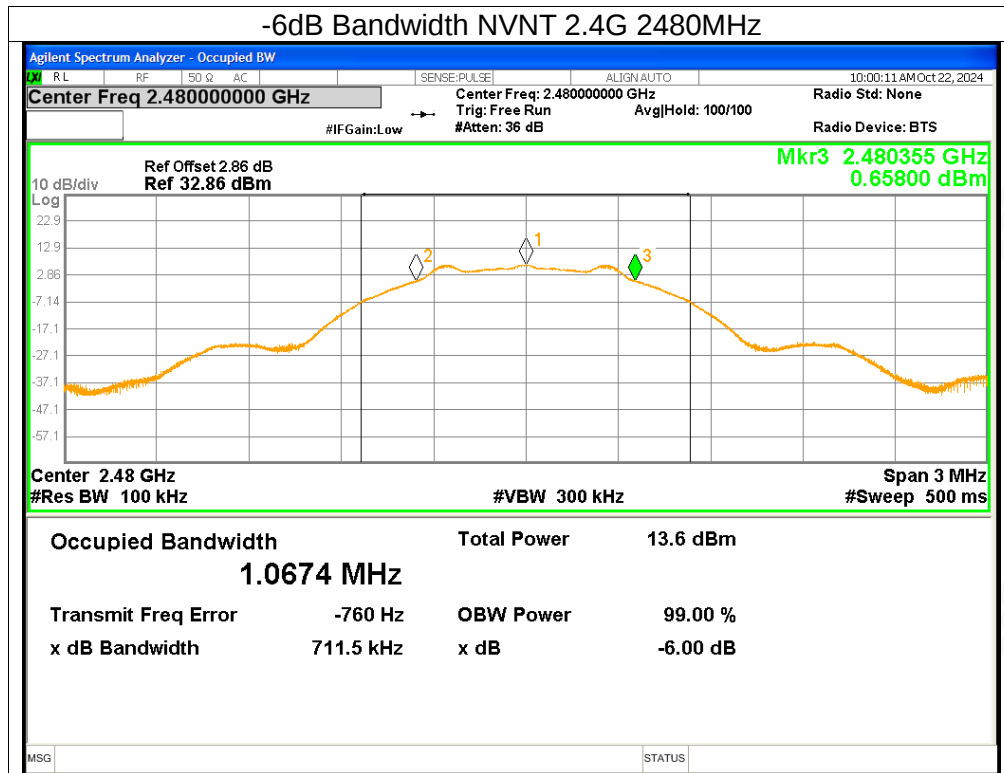




6. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	2.4G	2402	-6.5	≤ 8	Pass
NVNT	2.4G	2441	-5.68	≤ 8	Pass
NVNT	2.4G	2480	-6.23	≤ 8	Pass





Test Graphs

PSD NVNT 2.4G 2402MHz

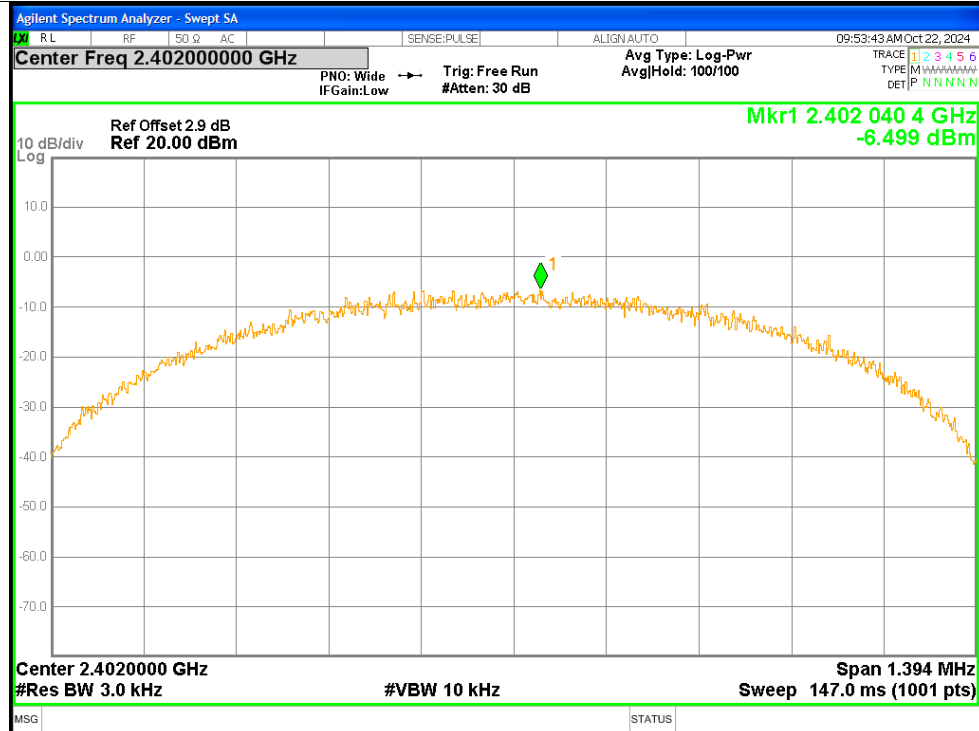

PSD NVNT 2.4G 2441MHz

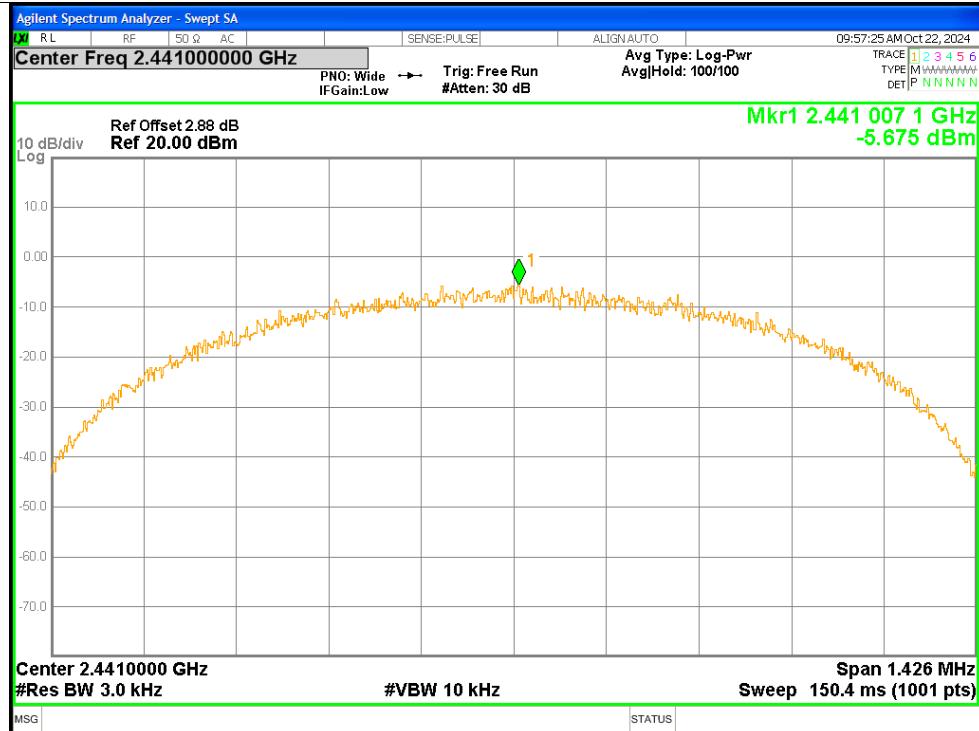

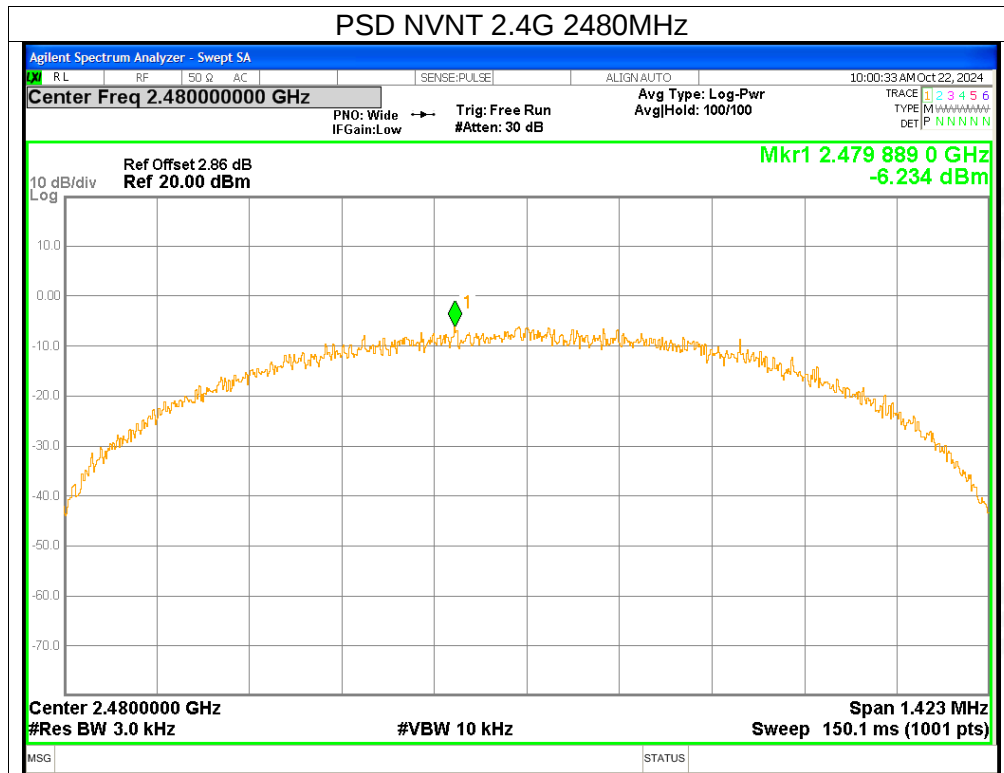





7. Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2402	-47.07	<=-20	Pass
NVNT	2.4G	2480	-52.22	<=-20	Pass


Test Graphs
Band Edge NVNT 2.4G 2402MHz Ref

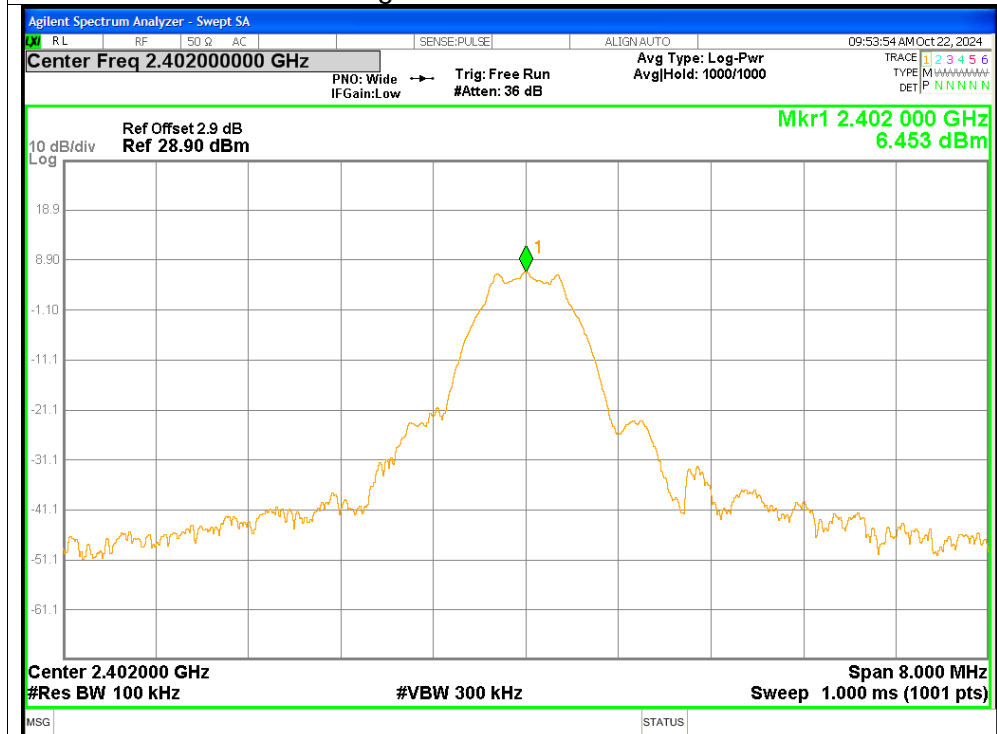


Band Edge NVNT 2.4G 2402MHz Emission

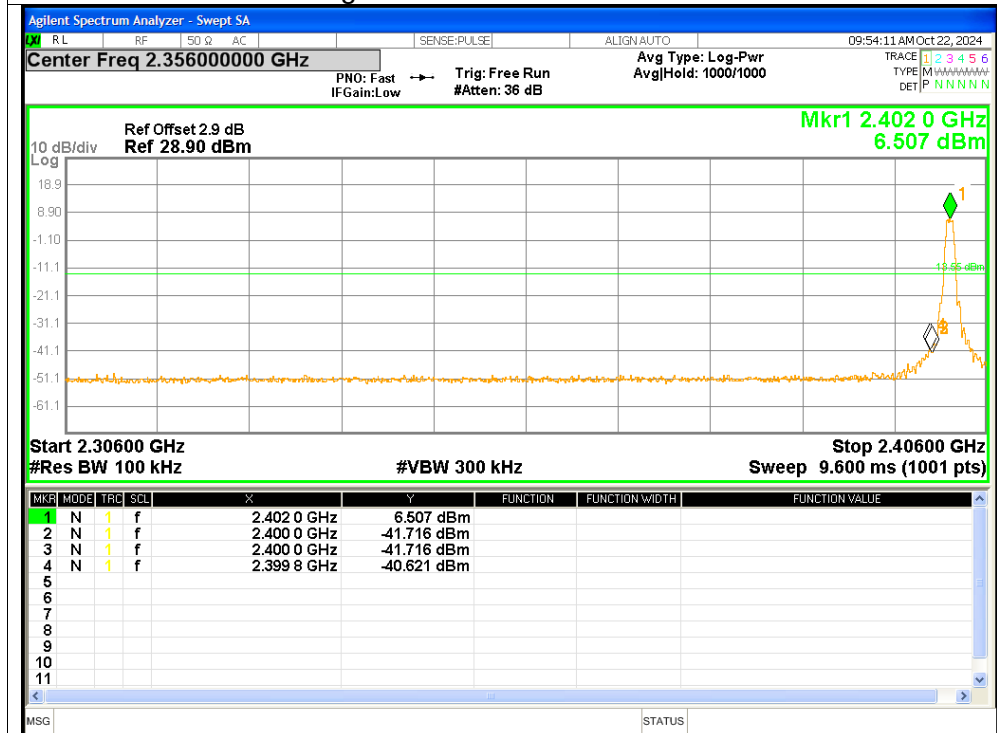

Band Edge NVNT 2.4G 2480MHz Ref

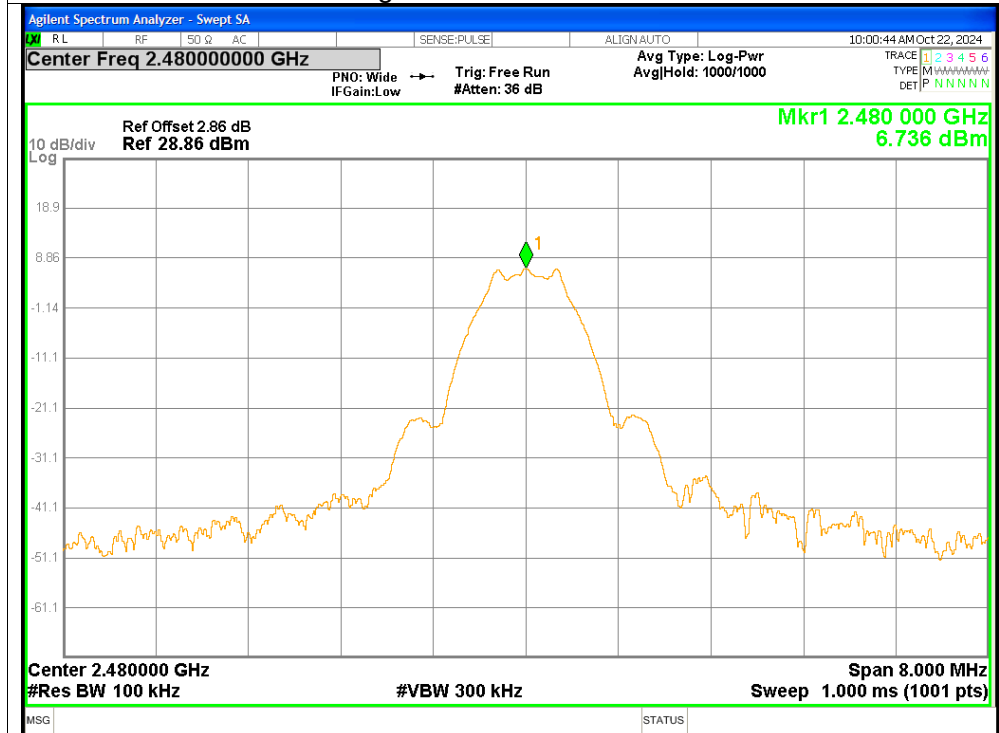

Band Edge NVNT 2.4G 2480MHz Emission

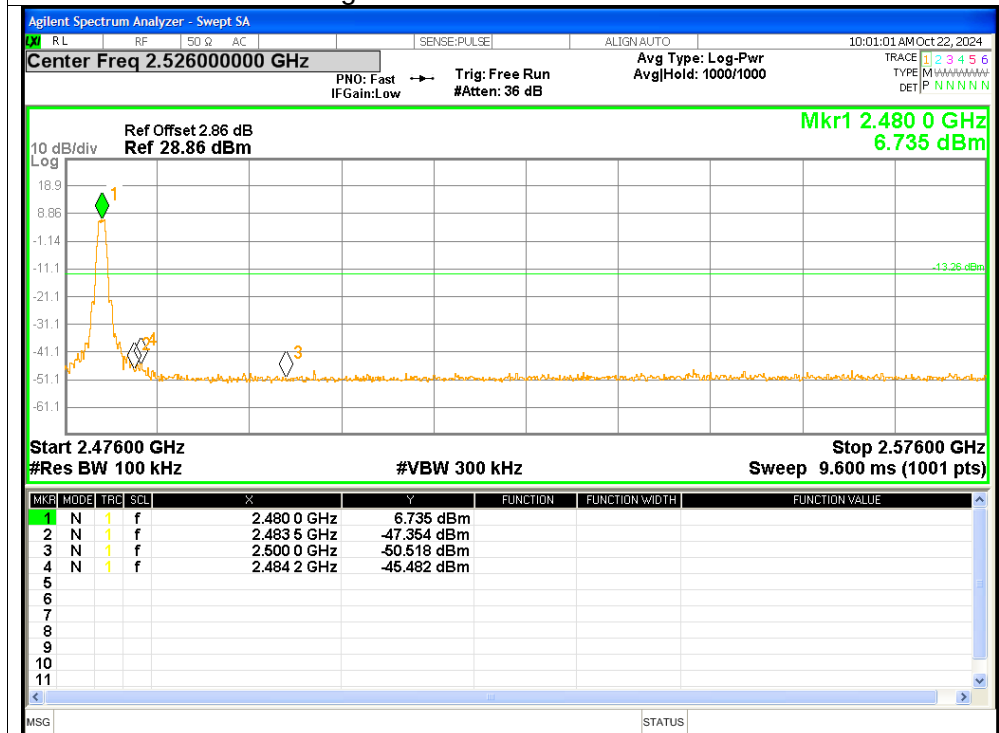





8. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2402	-44.95	≤ -20	Pass
NVNT	2.4G	2441	-44.42	≤ -20	Pass
NVNT	2.4G	2480	-44.39	≤ -20	Pass


Test Graphs	
Tx. Spurios	NVNT 2.4G 2402MHz Ref

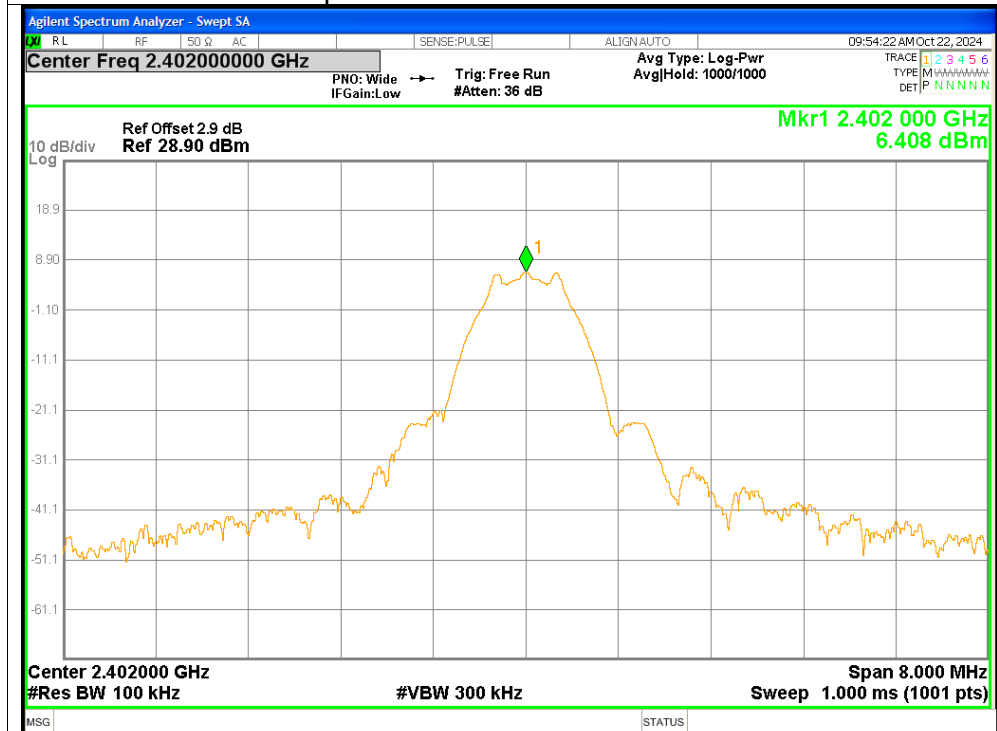


Tx. Spurious NVNT 2.4G 2402MHz Emission


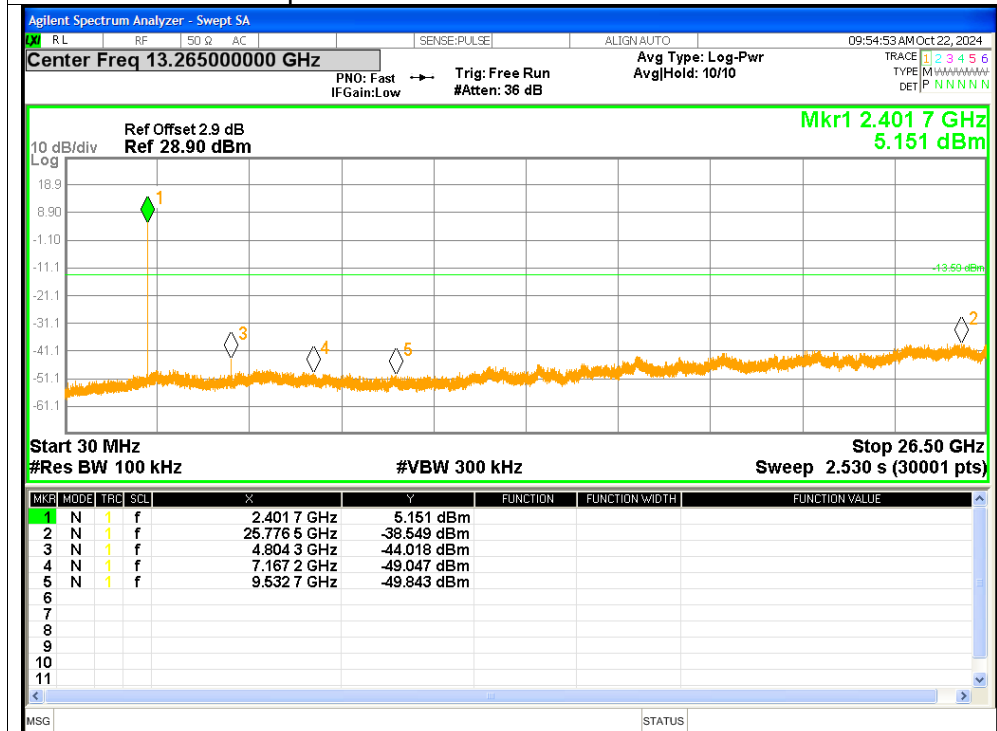


Tx. Spurious NVNT 2.4G 2441MHz Ref

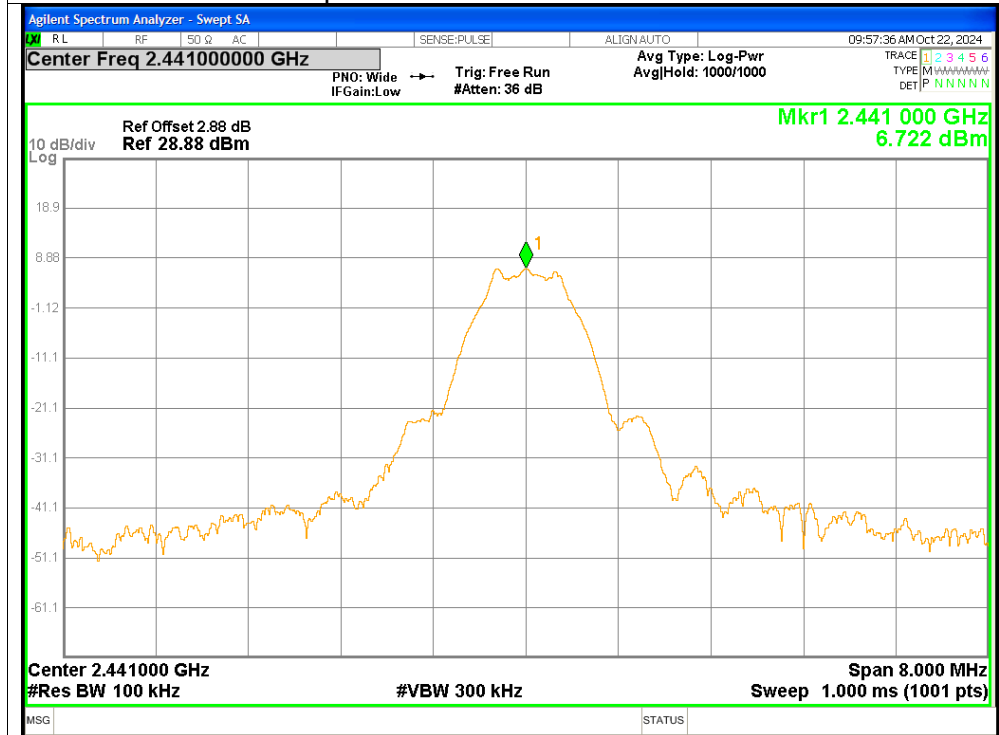

Tx. Spurious NVNT 2.4G 2441MHz Emission

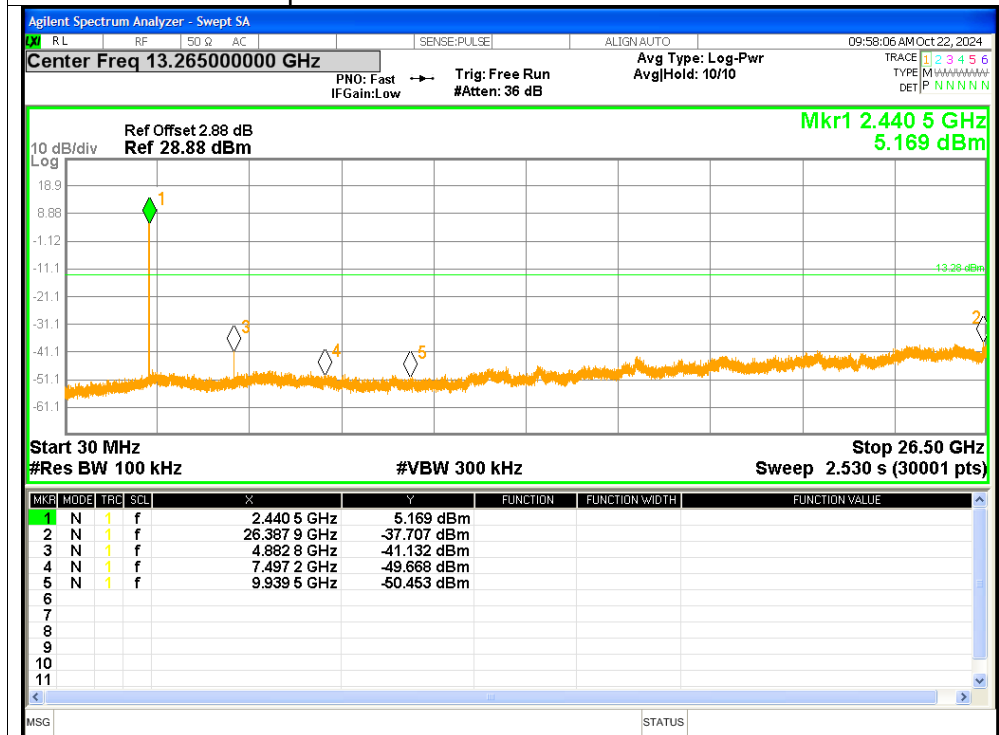


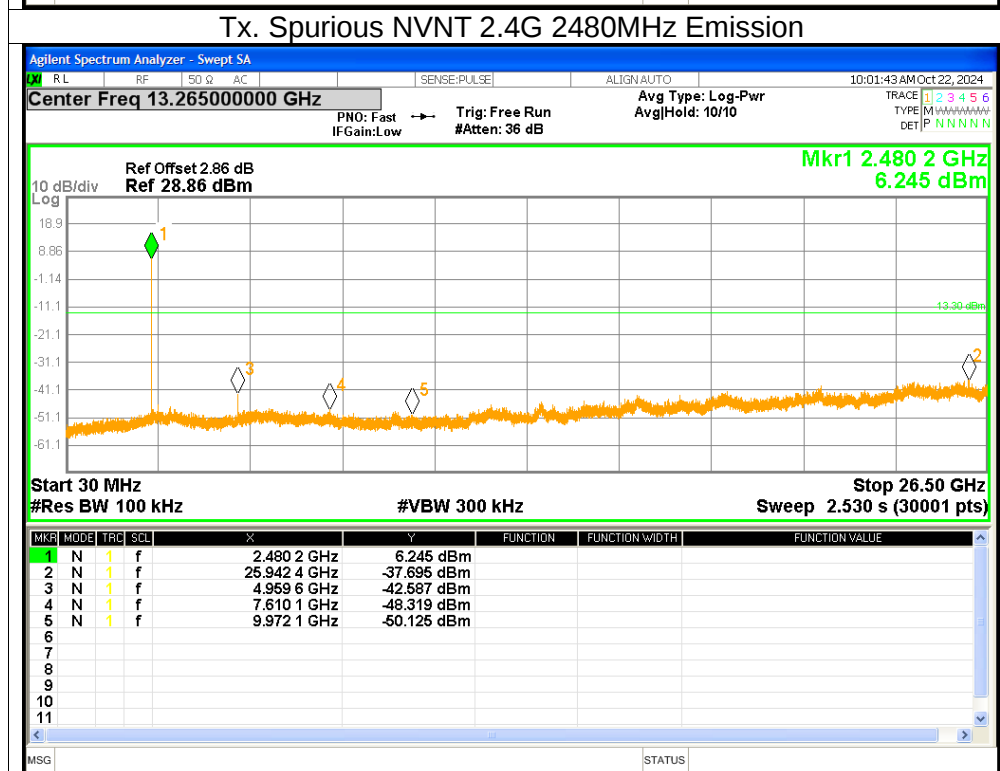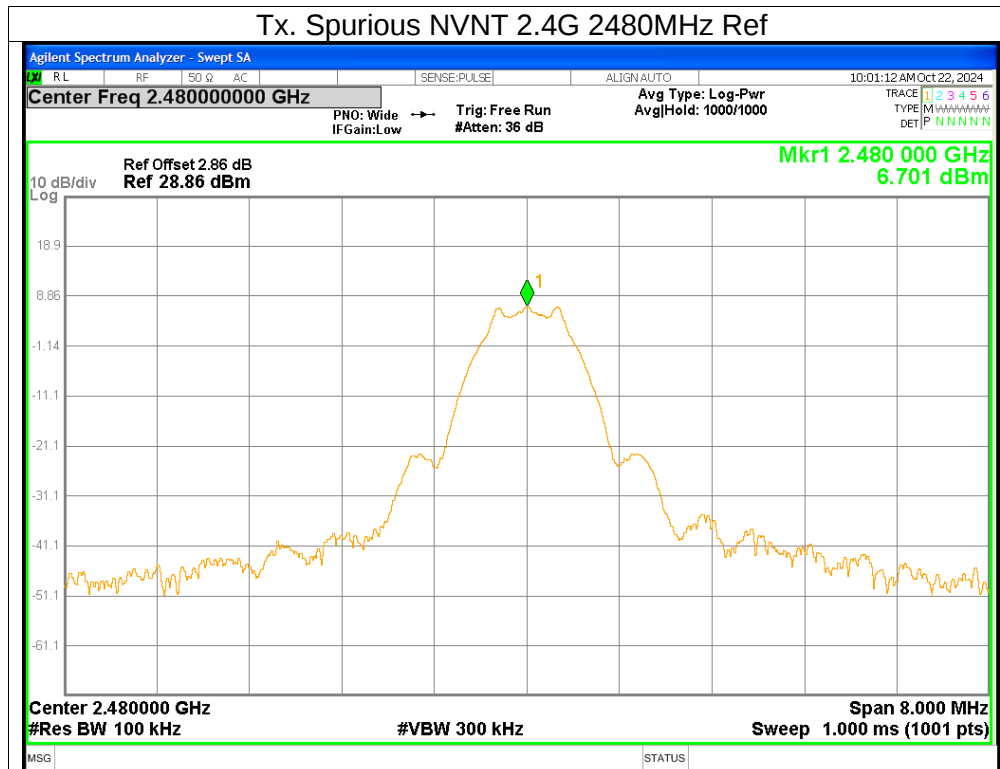


**Ant 2****1. Duty Cycle**


Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	2.4G	2402	85.59	0.68	0.67
NVNT	2.4G	2441	85.59	0.68	0.67
NVNT	2.4G	2480	85.45	0.68	0.67

Test Graphs

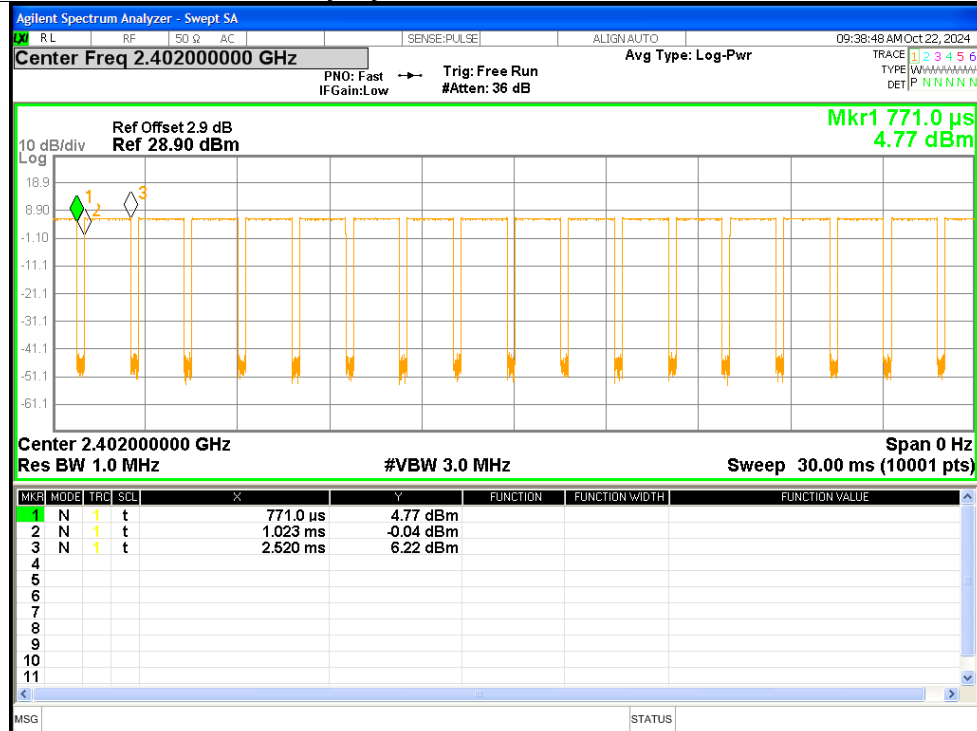

Duty Cycle NVNT 2.4G 2441MHz

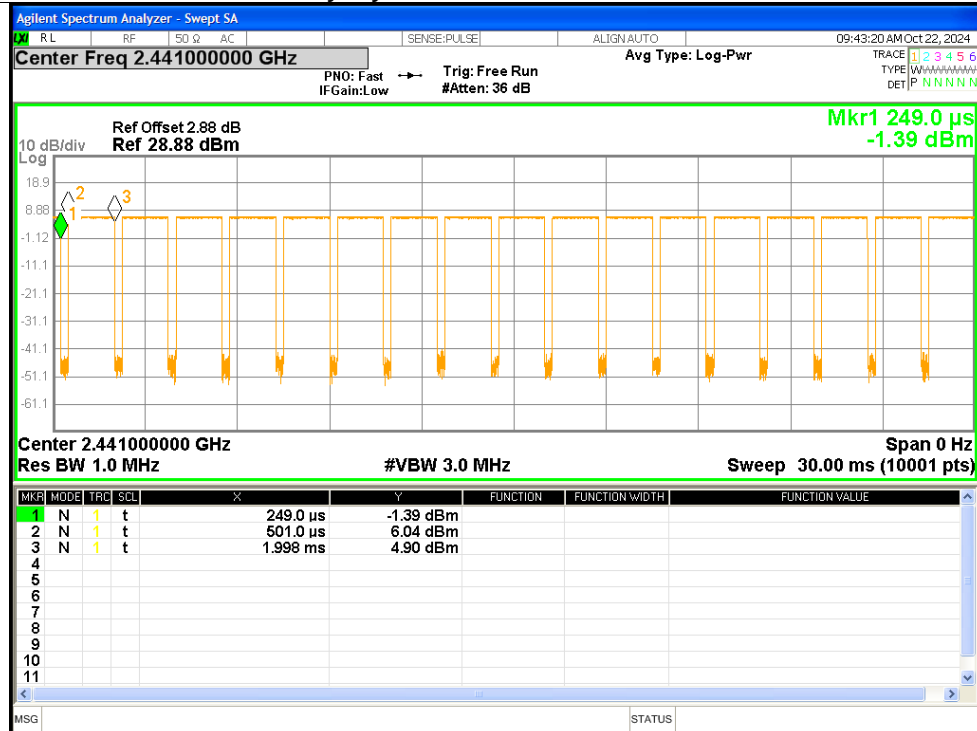

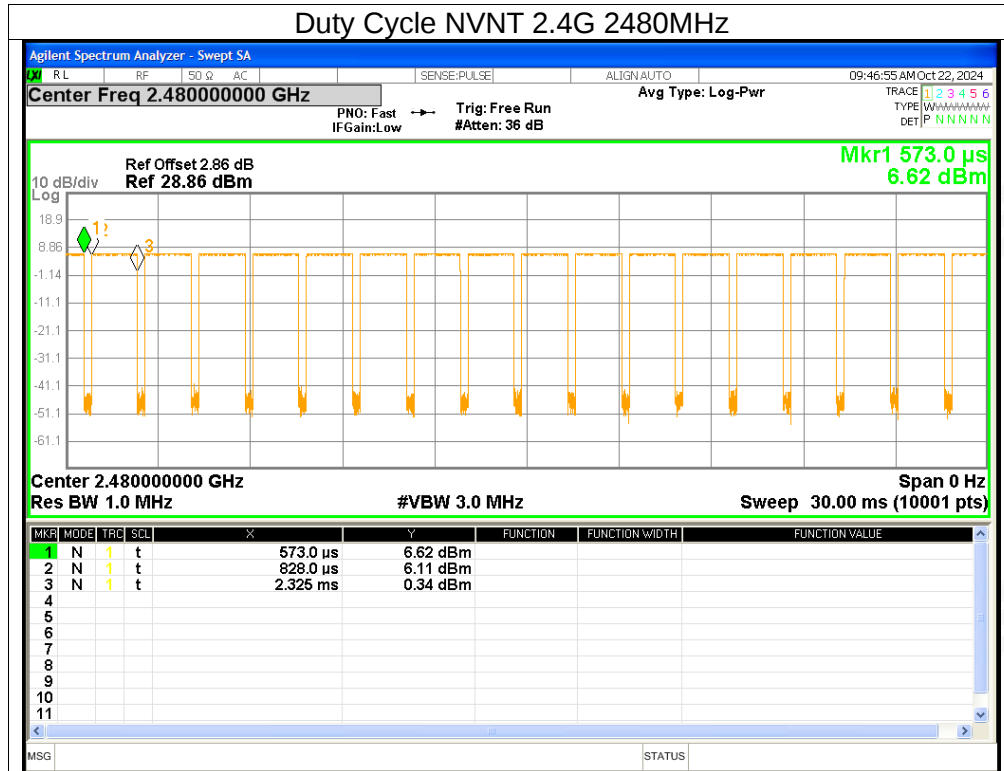




2. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2402	5.45	0.68	6.13	<=30	Pass
NVNT	2.4G	2441	5.87	0.68	6.55	<=30	Pass
NVNT	2.4G	2480	5.84	0.68	6.52	<=30	Pass





Test Graphs

Average Power NVNT 2.4G 2402MHz

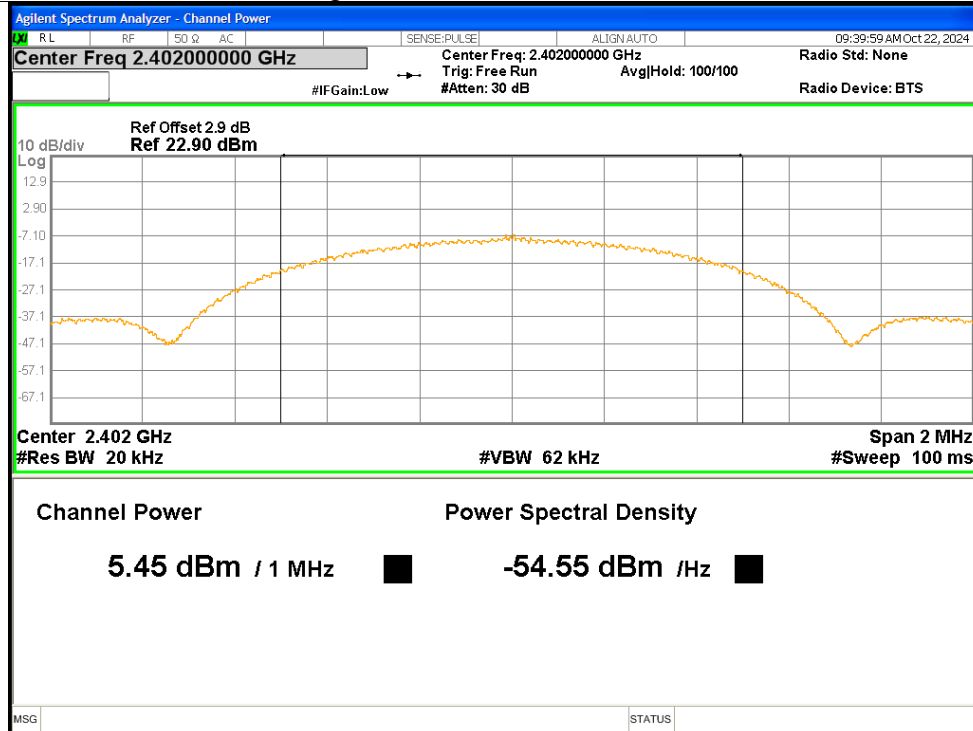

Average Power NVNT 2.4G 2441MHz

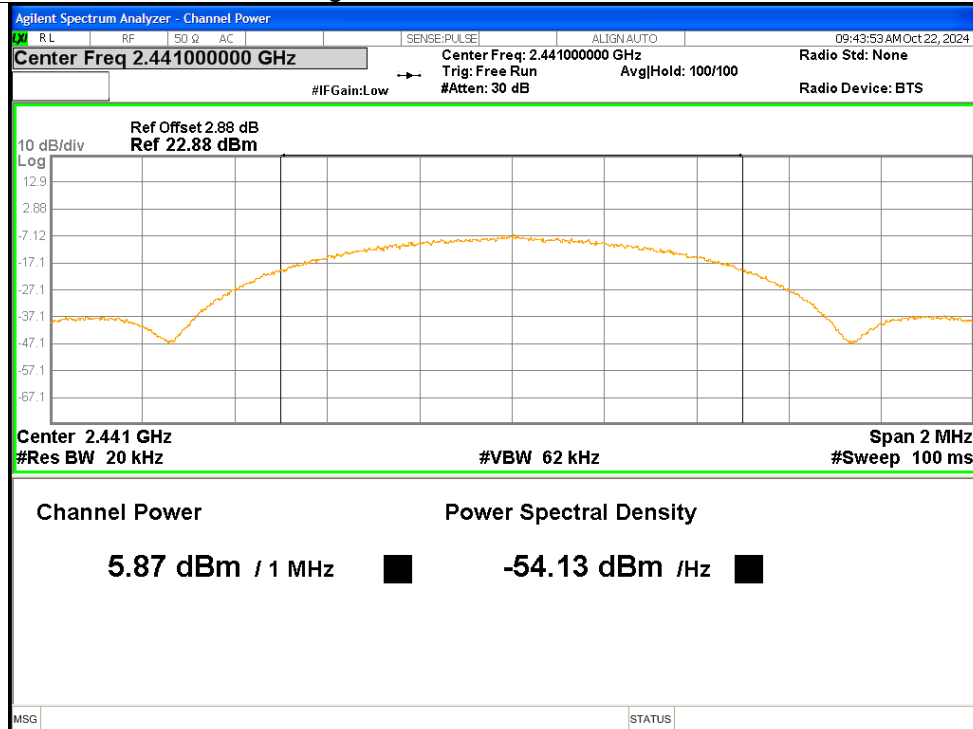

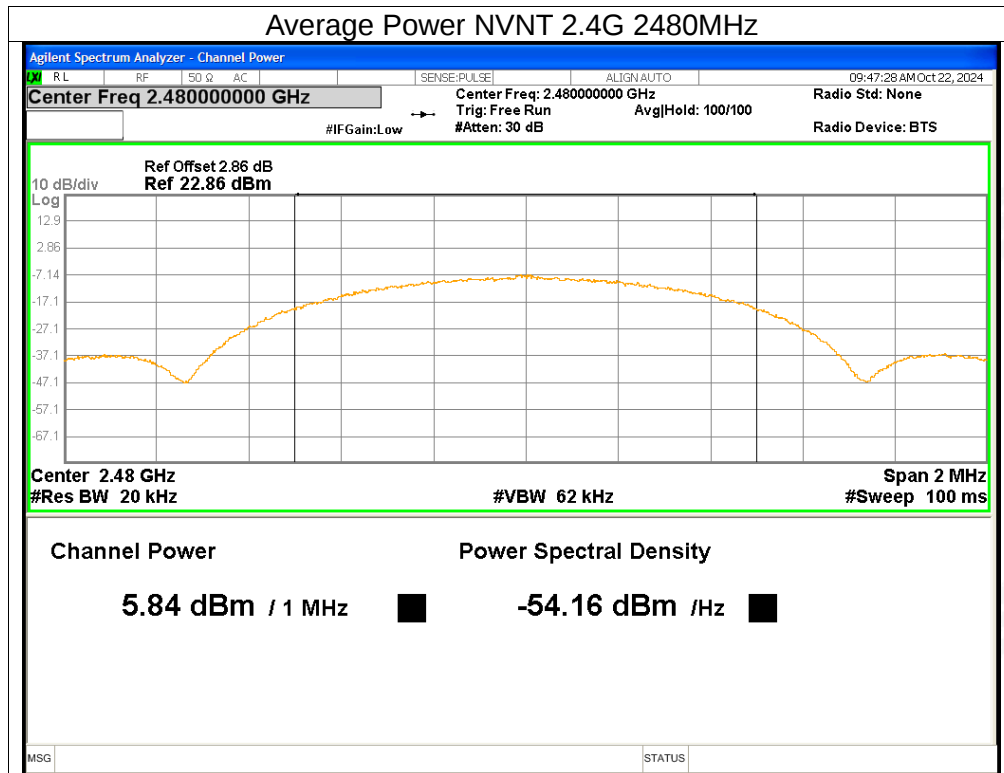




3. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2402	6.27	<=30	Pass
NVNT	2.4G	2441	6.64	<=30	Pass
NVNT	2.4G	2480	6.67	<=30	Pass





Test Graphs

Peak Power NVNT 2.4G 2402MHz

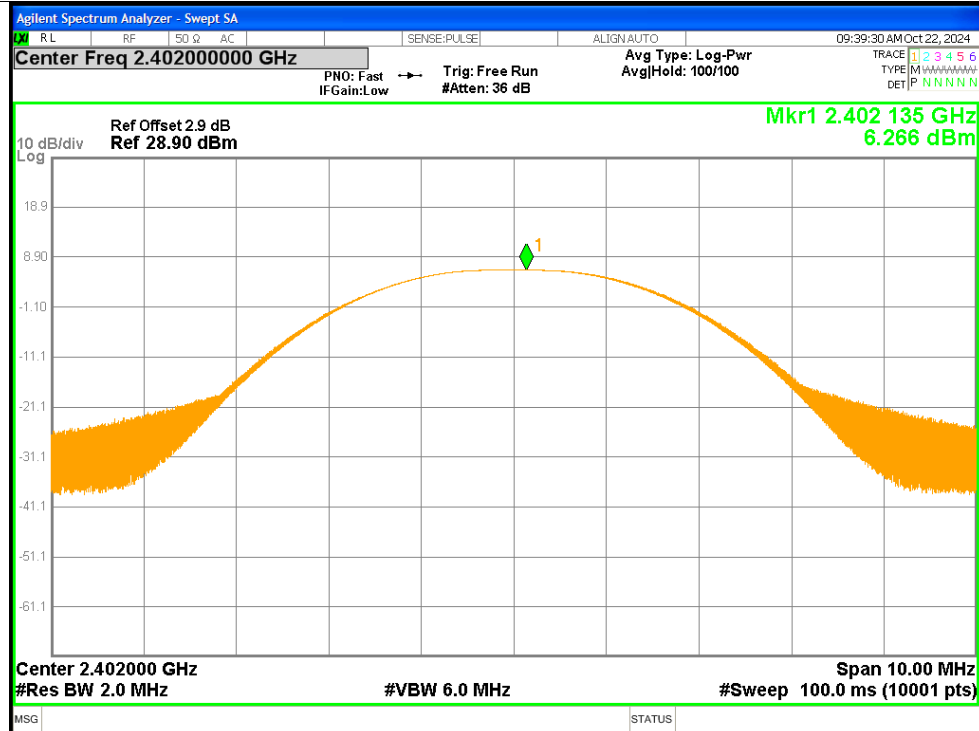

Peak Power NVNT 2.4G 2441MHz

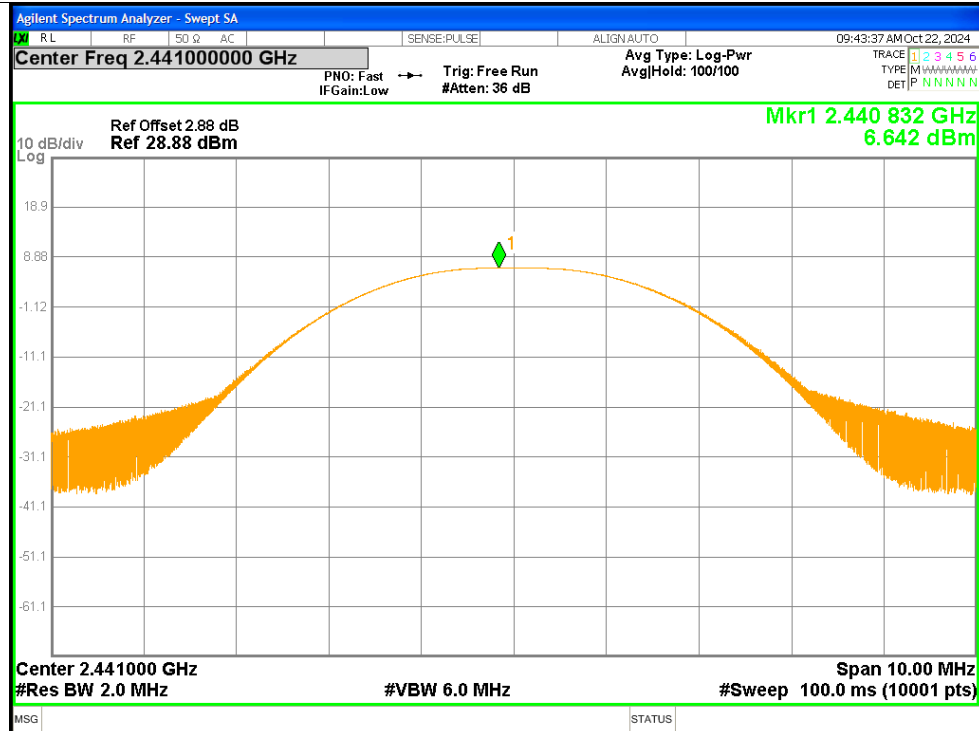

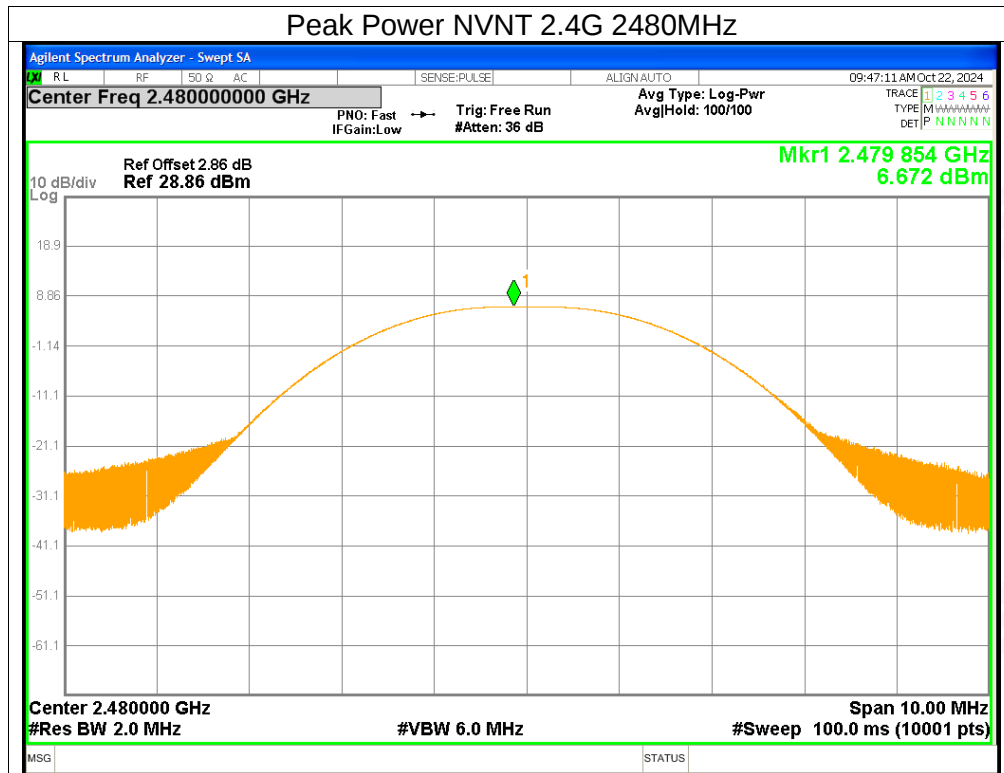




4. -6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	2.4G	2402	0.6979	≥ 0.5	Pass
NVNT	2.4G	2441	0.7171	≥ 0.5	Pass
NVNT	2.4G	2480	0.7143	≥ 0.5	Pass





Test Graphs

-6dB Bandwidth NVNT 2.4G 2402MHz

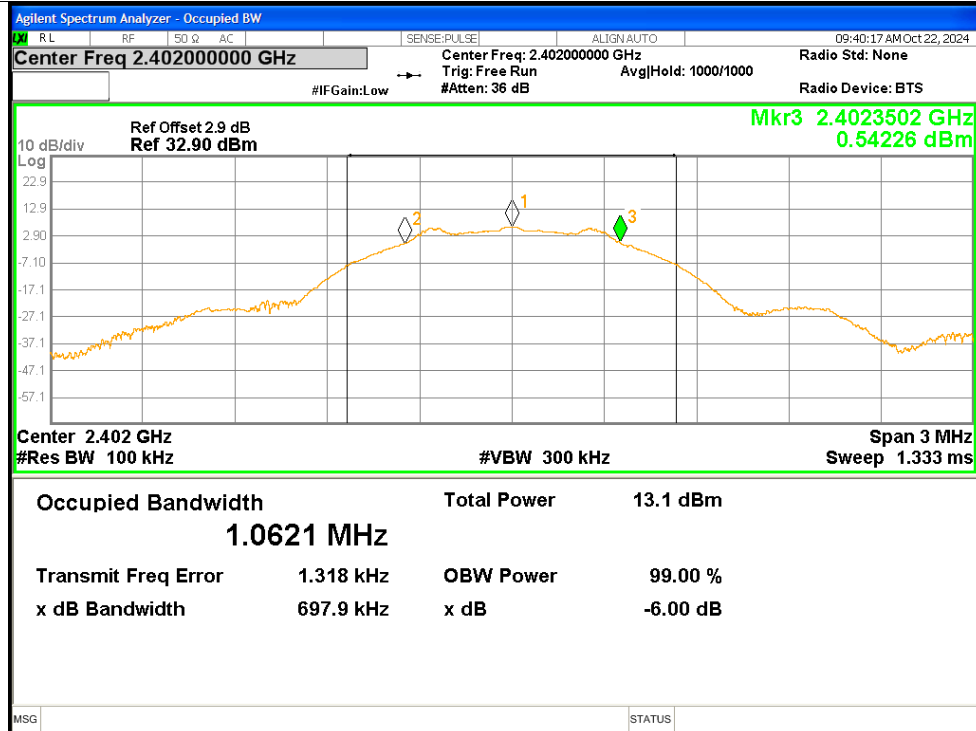

-6dB Bandwidth NVNT 2.4G 2441MHz

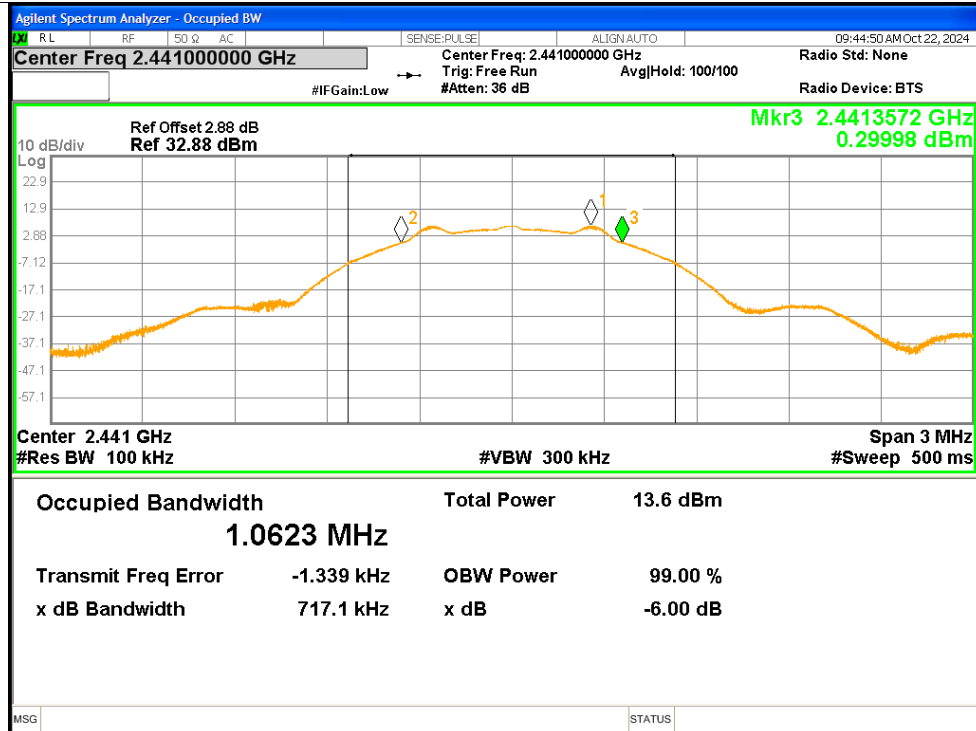

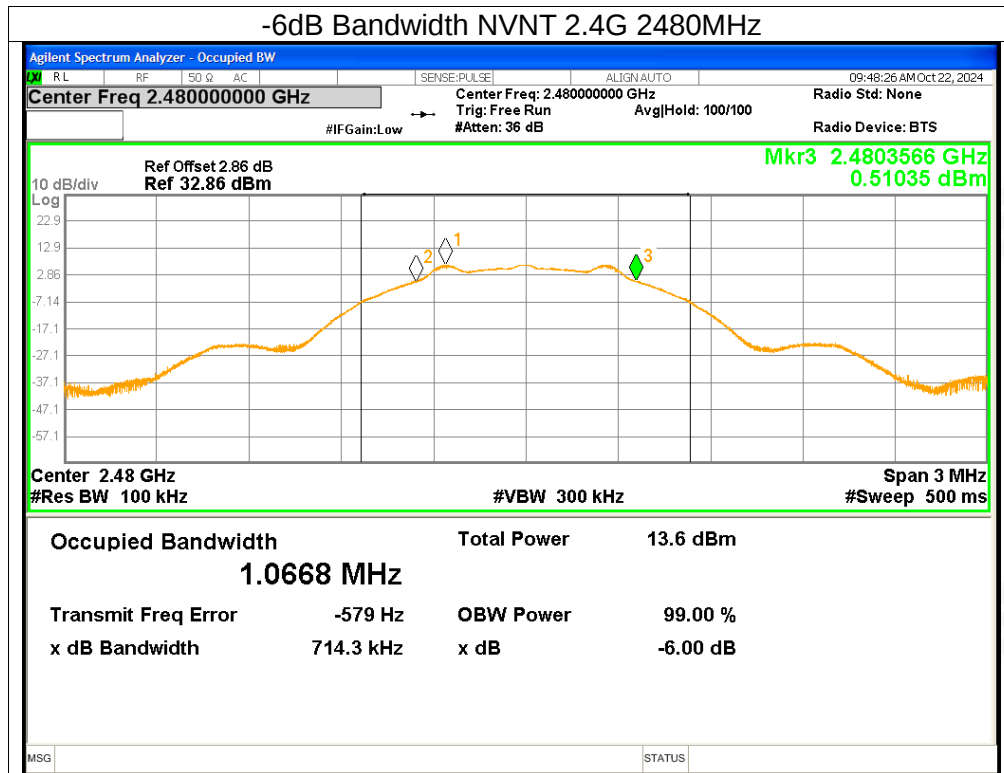




6. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	2.4G	2402	-6.35	≤ 8	Pass
NVNT	2.4G	2441	-5.34	≤ 8	Pass
NVNT	2.4G	2480	-5.53	≤ 8	Pass





Test Graphs

PSD NVNT 2.4G 2402MHz

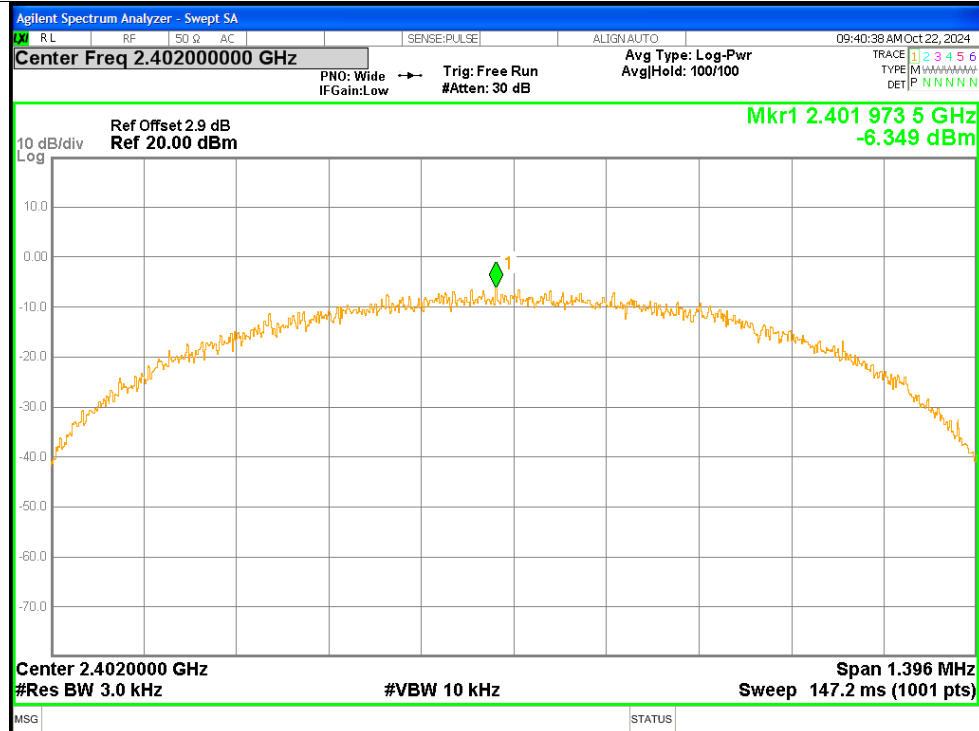

PSD NVNT 2.4G 2441MHz

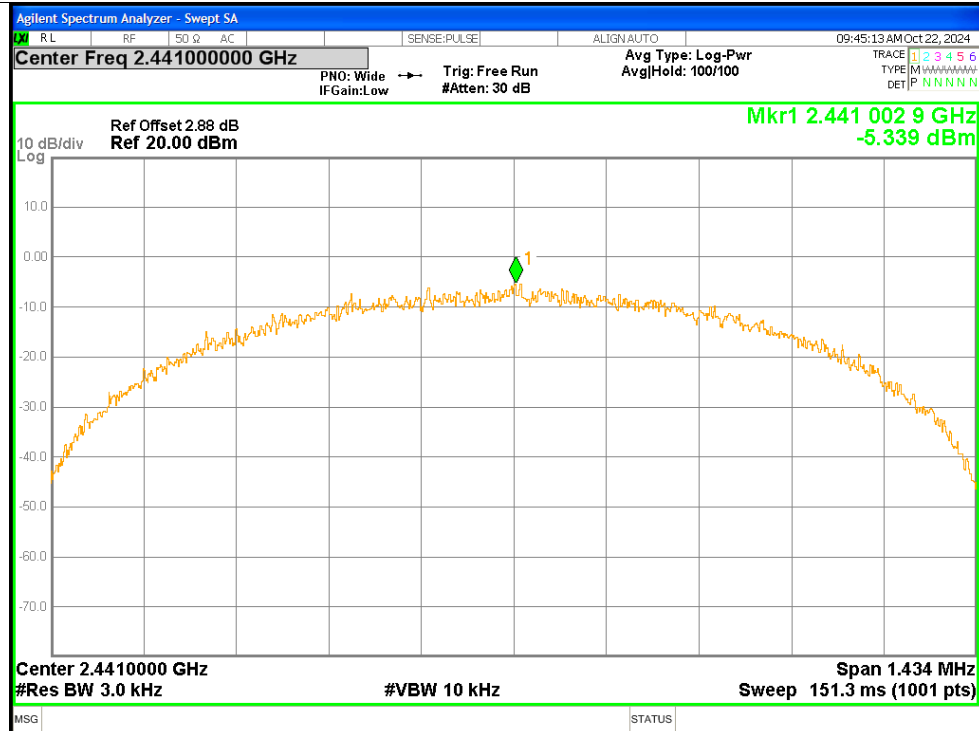

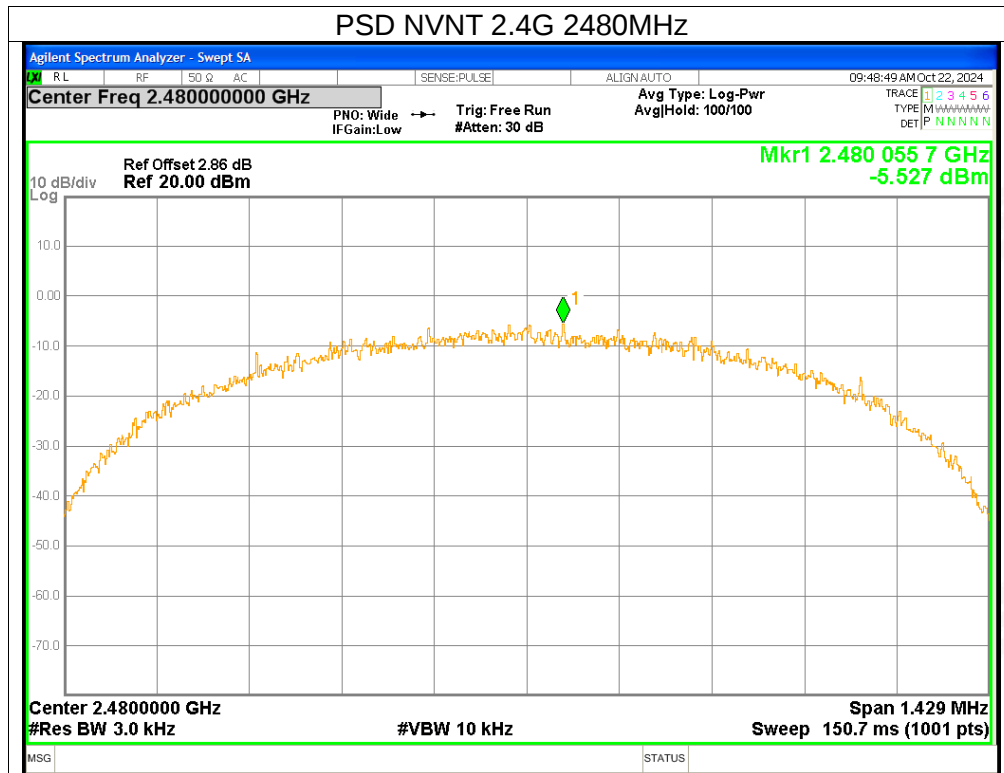




7. Band Edge


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2402	-46.44	≤ -20	Pass
NVNT	2.4G	2480	-52.19	≤ -20	Pass



Test Graphs

Band Edge NVNT 2.4G 2402MHz Ref

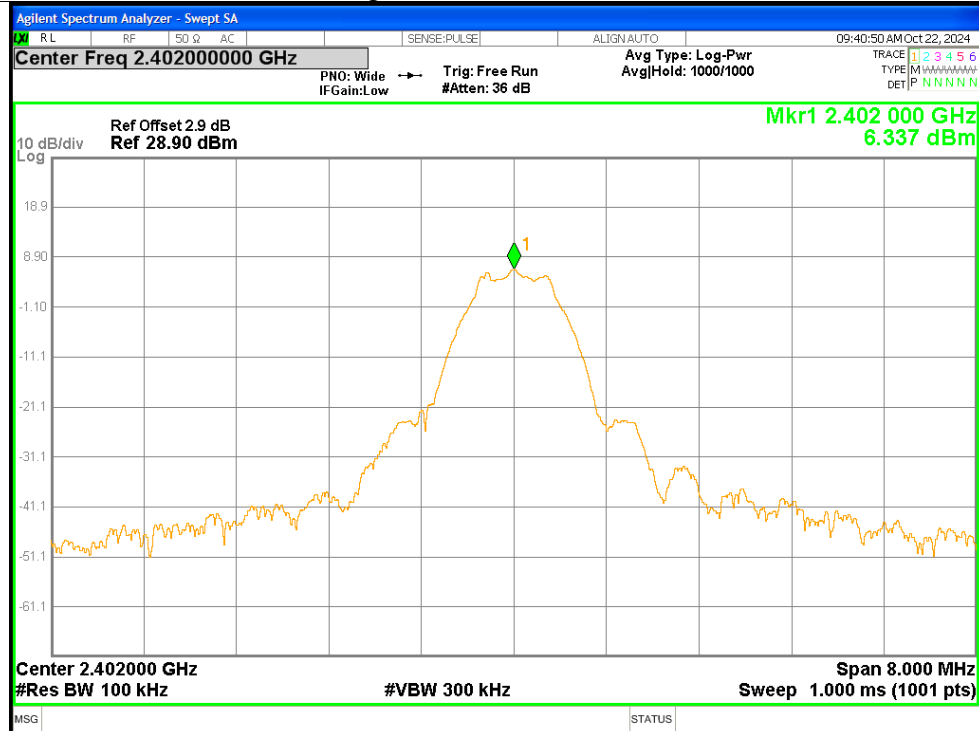

Band Edge NVNT 2.4G 2402MHz Emission

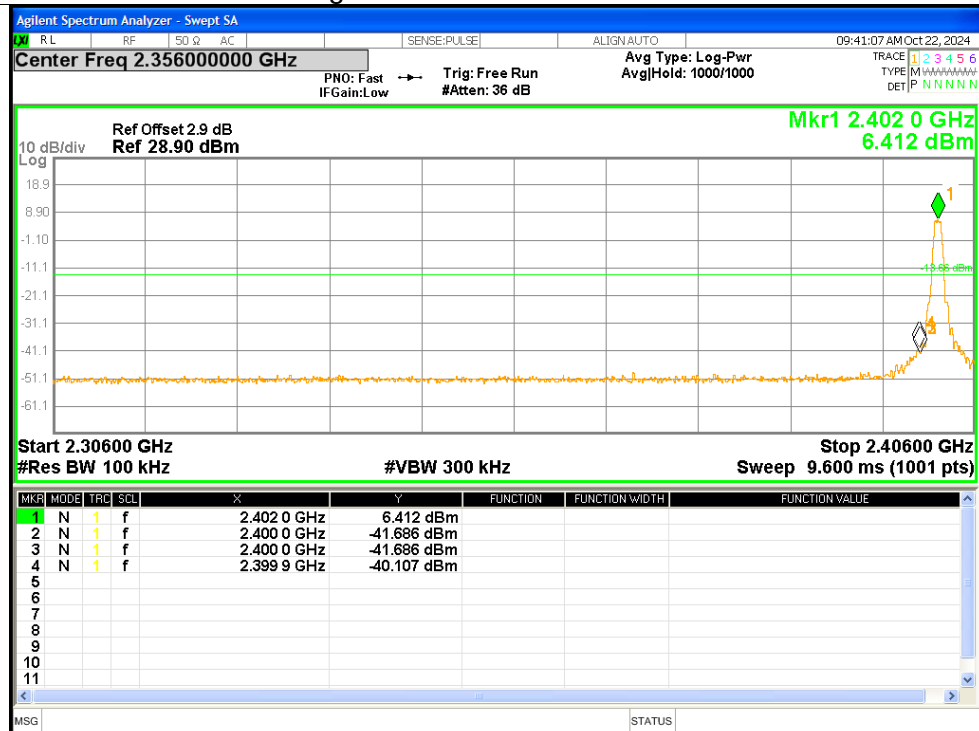

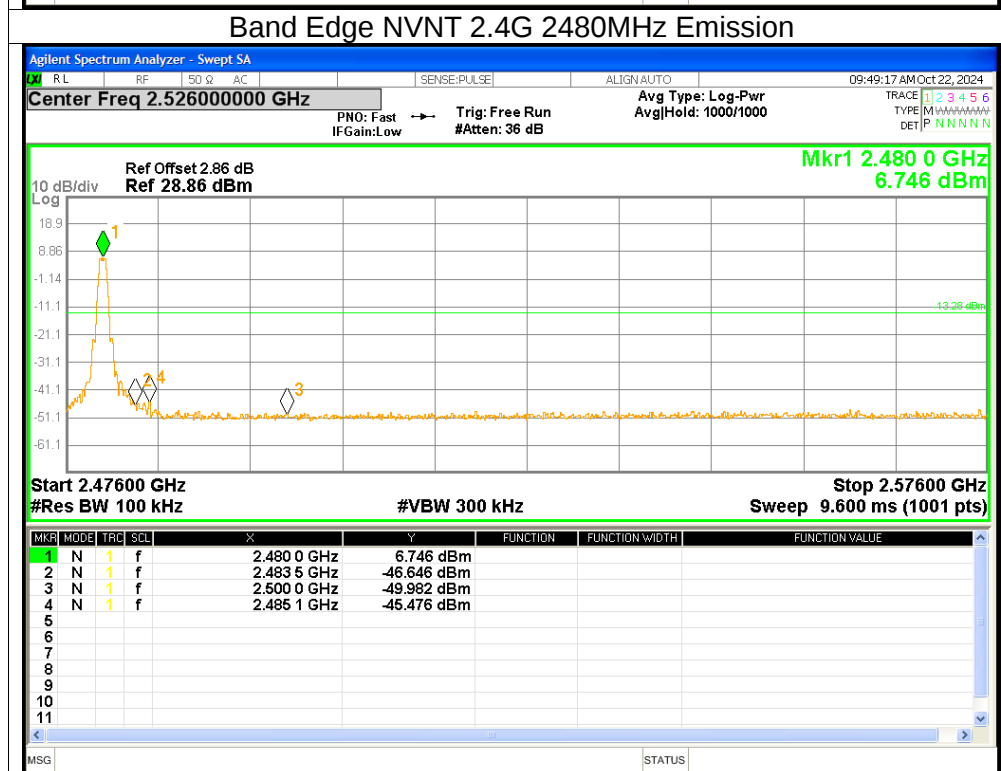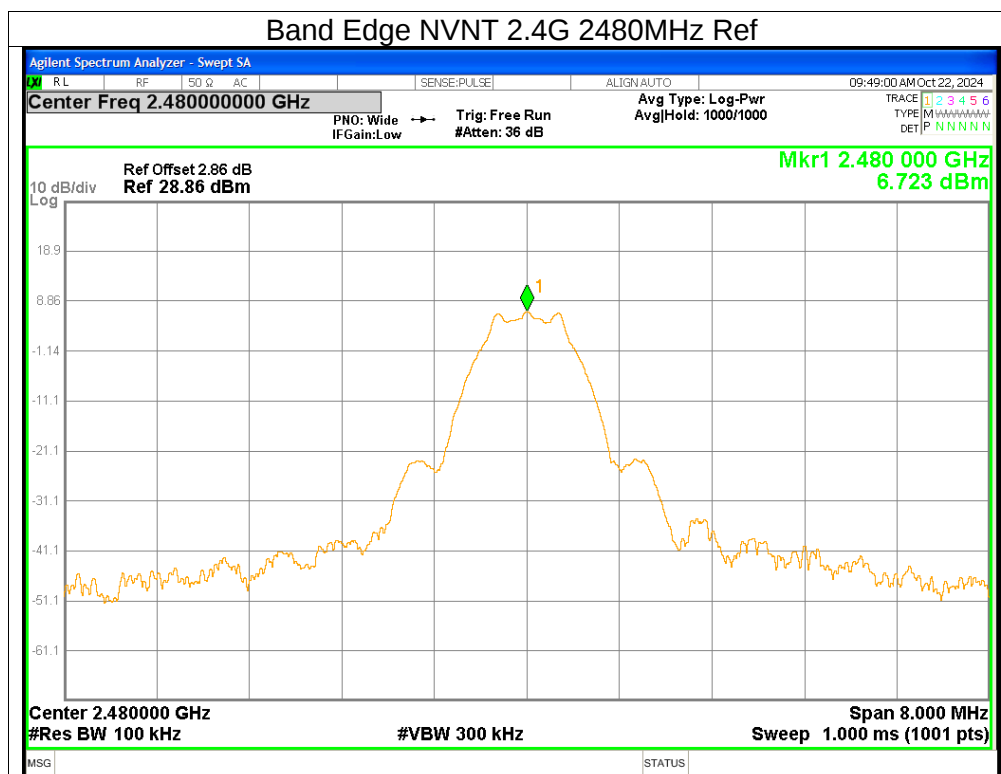





8. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2402	-44.79	≤ -20	Pass
NVNT	2.4G	2441	-44.43	≤ -20	Pass
NVNT	2.4G	2480	-44.86	≤ -20	Pass

Test Graphs	
Tx. Spurios	NVNT 2.4G 2402MHz Ref

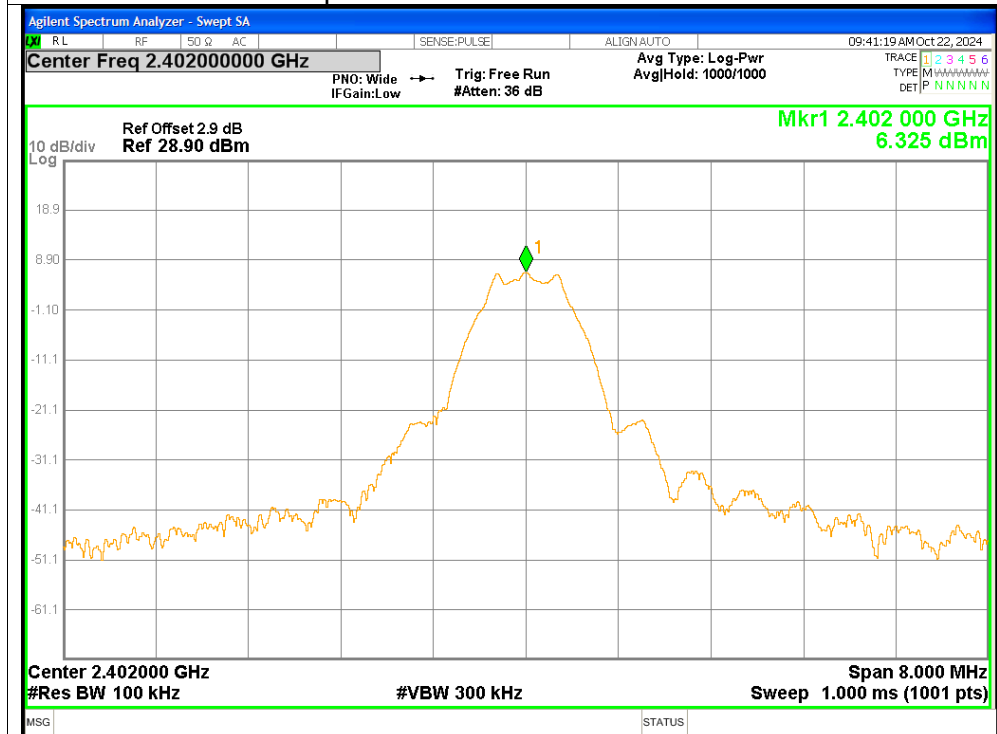


Tx. Spurious NVNT 2.4G 2402MHz Emission

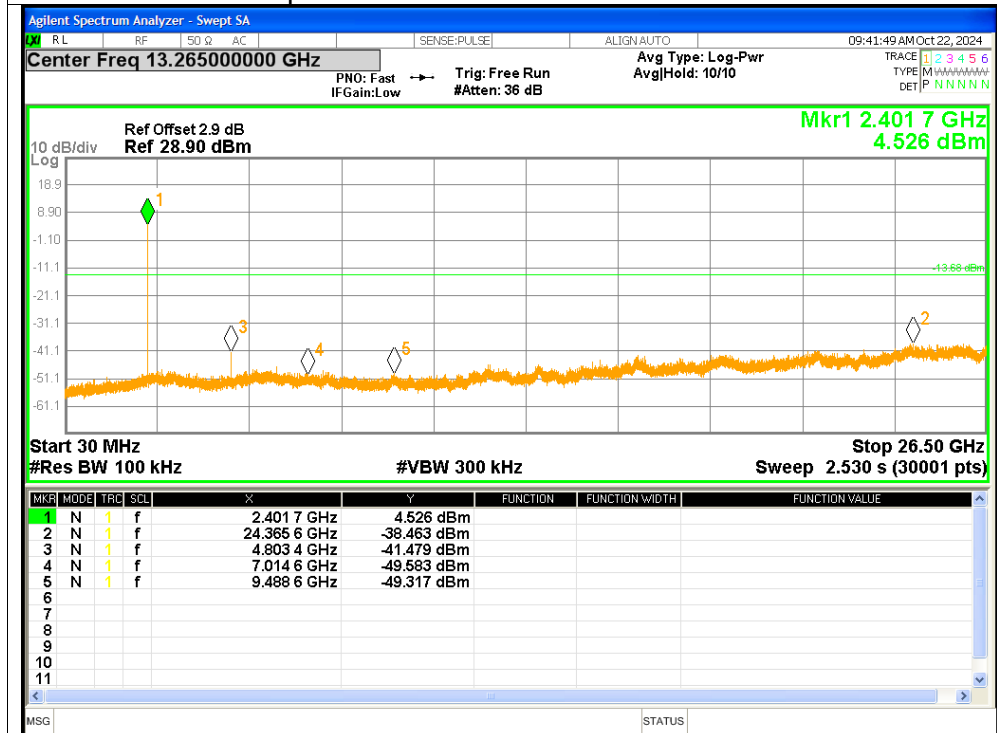




Tx. Spurious NVNT 2.4G 2441MHz Ref

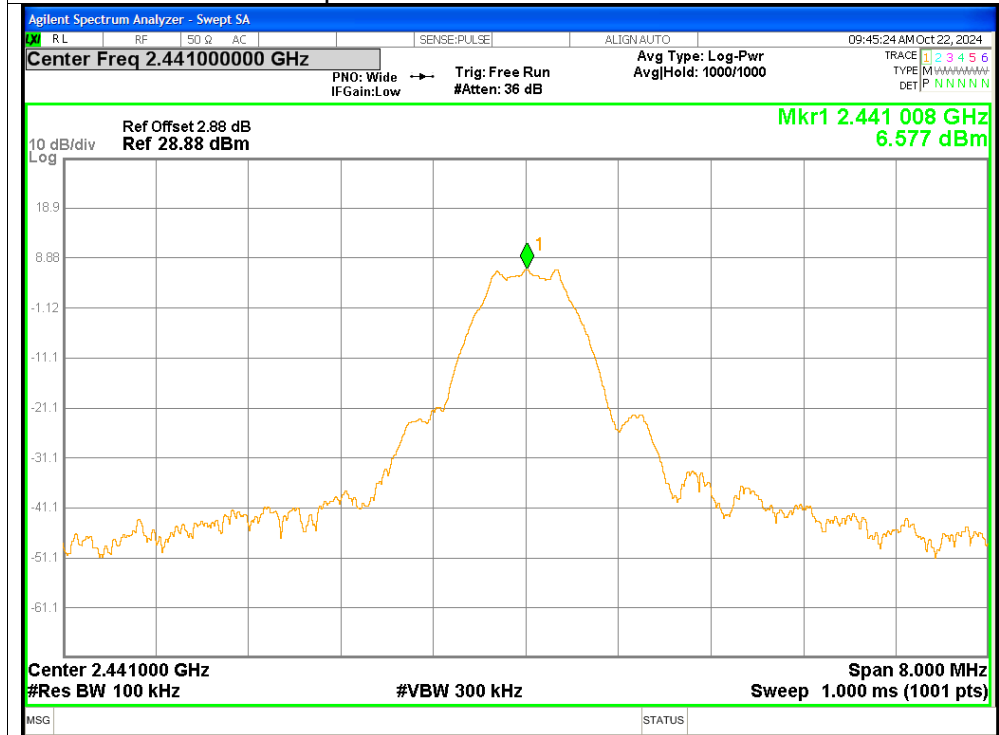

Tx. Spurious NVNT 2.4G 2441MHz Emission

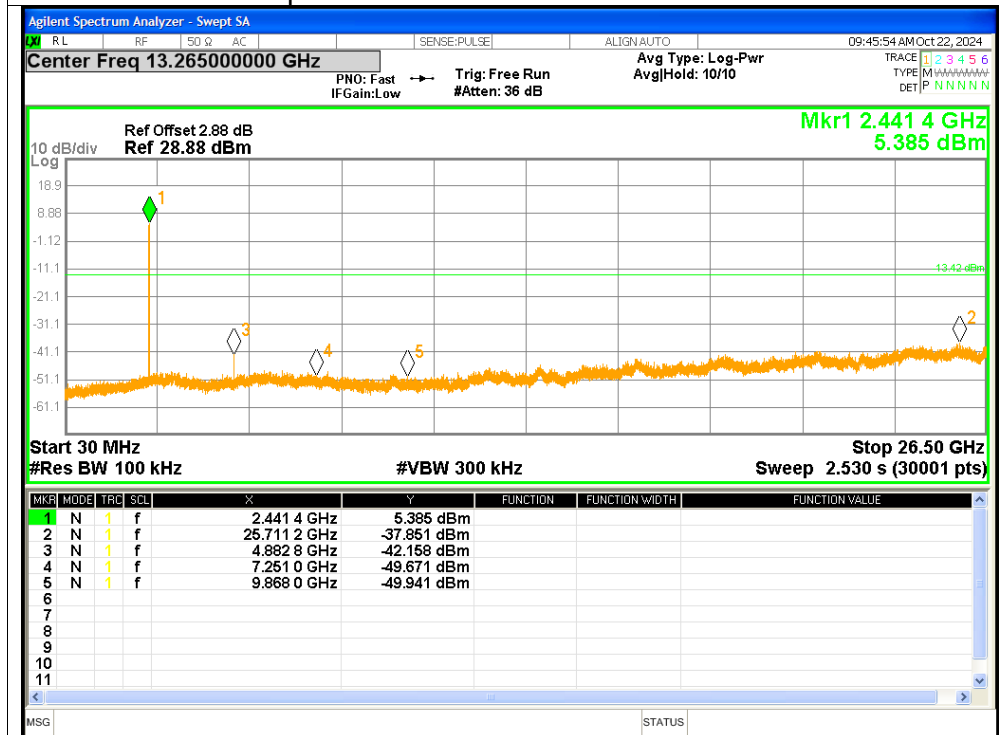




Tx. Spurious NVNT 2.4G 2480MHz Ref



Tx. Spurious NVNT 2.4G 2480MHz Emission

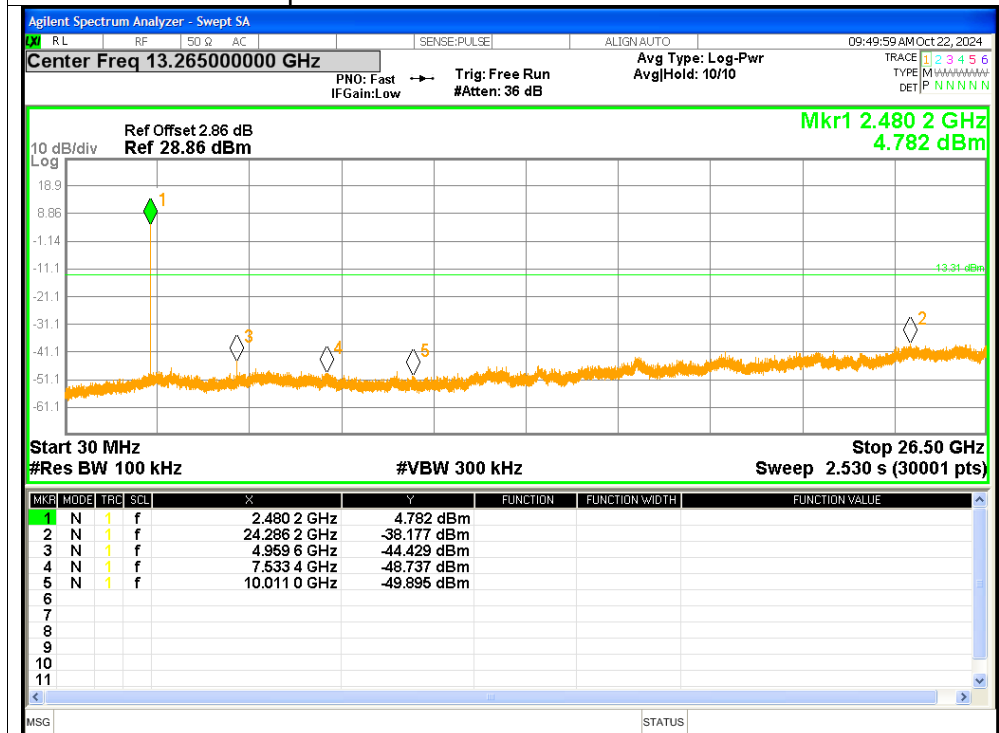



APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****