



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC Part 27C & RSS-130 & RSS-139 & RSS-199

Report Reference No. : CTL2305223051-WF04

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Tested by:
(position+printed name+signature)

Wuqiang Wu
(Test Engineer)

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)



Product Name : WH3 Wireless Hub

Model/Type reference : WH3

List Model(s)..... : N/A

Trade Mark..... : N/A

FCC ID..... : 2BHCF-WH3

IC..... : 32692-WH3

Applicant's name : Monitor Pro Ltd

Address of applicant : 27A Devon St, Mangawhai Heads, Northland 0505, NZ

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard : FCC CFR Title 47 Part 2, Part 27
RSS-130 Issue 2
RSS-139 Issue 4
RSS-199 Issue 4
EIA/TIA 603-D: 2010
KDB 971168 D01

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF..... : Dated 2011-01

Date of receipt of test item : May 15, 2024

Date of Test Date..... : May 15, 2024–July 14, 2024

Data of Issue..... : July 15, 2024

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2305223051-WF04	July 15, 2024
		Date of issue

Equipment under Test : WH3 Wireless Hub

Sample No : CTL2305223051

Model /Type : WH3

Hardware Version Id : WH3
Number(HVIN)

Listed Models : N/A

Applicant : **Monitor Pro Ltd**

Address : 27A Devon St, Mangawhai Heads, Northland 0505,
NZ

Manufacturer : **Tzone Digital Technology Co Ltd**

Address : 2nd Floor, Building L, Chengdexuan Science and
Technology Park, Second Industrial Zone, Lisonglang
Community, Gongming Street, Guangming District,
Shenzhen ,China

Test result	Pass *
--------------------	---------------

*In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

**** Modified History ****

[illegible]

Table of Contents

Page

1. SUMMARY	6
1.1. TEST STANDARDS	6
1.2. TEST DESCRIPTION	6
1.3. TEST FACILITY	7
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	9
2.1. ENVIRONMENTAL CONDITIONS	9
2.2. GENERAL DESCRIPTION OF EUT	9
2.3. DESCRIPTION OF TEST MODES	10
2.4. EQUIPMENTS USED DURING THE TEST	11
2.5. RELATED SUBMITTAL(S) / GRANT (S)	11
2.6. MODIFICATIONS	11
3. TEST CONDITIONS AND RESULTS	12
3.1. OUTPUT POWER	12
3.2. PEAK-TO-AVERAGE RATIO (PAR)	20
3.3. OCCUPIED BANDWIDTH AND EMISSION BANDWIDTH	21
3.4. BAND EDGE COMPLIANCE	22
3.5. SPURIOUS EMISSION	23
4. FREQUENCY STABILITY UNDER TEMPERATURE & VOLTAGE VARIATIONS	42
5. TEST SETUP PHOTOS OF THE EUT	44
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	46

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 27](#) : MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA/EIA 603 D June 2010](#):Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[RSS-Gen Issue 4](#): General Requirements for Compliance of Radio Apparatus

[RSS-130 Issue 2](#): Equipment Operating in the Frequency Bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz

[RSS-139 Issue 4](#): Advanced Wireless Services Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz

[RSS-199 Issue 4](#): Broadband Radio Service (BRS) Equipment Operating in the Band 2500-2690 MHz

[SRSP-518](#): Technical Requirements in the Bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz Issue 2, February 2019

[SRSP-513](#): Technical Requirements for Advanced Wireless Services in the Bands 1710–1780 MHz and 2110–2180 MHz

[SRSP-517](#): Technical Requirements for Broadband Radio Service (BRS) in the Band 2500-2690 MHz

[KDB971168 D01: v03r01](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[ANSI C63.10: 2020](#): American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2014](#): –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz Range of 9 kHz to 40GHz

1.2. Test Description

Test Item	Section in CFR 47	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(b)(10)(c)(10)(h)(2) RSS 130 4.6 RSS 139 6.5 RSS 199 4.4	Pass
Peak-to-Average Ratio	§2.1046 §27.50(d)(5) RSS 130 4.6 RSS 139 6.5 RSS 199 4.4	Pass
Modulation Characteristics	§2.1047	Pass
Bandwidth	§2.1049 RSS-GEN 6.7	Pass
Band Edges Compliance	§ 2.1051 §27.53(c)(f)(g)(m)(4) RSS 130 4.7 RSS 139 6.6	Pass
Conducted Spurious Emissions	§2.1051 §27.53(c)(f)(g)(m)(4)	Pass
Field Strength of Spurious Radiation	§2.1053 §27.53(c)(f)(g)(m)(4) RSS 130 4.7 RSS 139 6.6	Pass

Frequency stability	§2.1055 §27.54 RSS 130 4.5 RSS 139 6.4 RSS 199 4.3	Pass
---------------------	--	------

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power Radiated	±2.20 dB	(1)

Occupied Bandwidth	$\pm 0.02\text{ppm}$	(1)
Radiated Emission 30~1000MHz	$\pm 4.10\text{dB}$	(1)
Radiated Emission Above 1GHz	$\pm 4.32\text{dB}$	(1)
Conducted Disturbance 0.15~30MHz	$\pm 2.96\text{dB}$	(1)
20dB Emission Bandwidth	$\pm 1.9\%$	(1)
Carrier Frequency Separation	$\pm 1.9\%$	(1)
Maximum Power Spectral Density Level	$\pm 0.98\text{ dB}$	(1)
Number of Hopping Channel	$\pm 1.9\%$	(1)
Time of Occupancy	$\pm 0.11\%$	(1)
Max Peak Conducted Output Power	$\pm 0.98\text{ dB}$	(1)
Band-edge Spurious Emission	$\pm 1.21\text{dB}$	(1)
Conducted RF Spurious Emission	9kHz-7GHz: $\pm 1.09\text{dB}$ 7GHz-26.5GHz: $\pm 3.27\text{dB}$	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	WH3 Wireless Hub		
Model/Type reference:	WH3		
Power supply:	DC 12V from adapter		
Adapter infromation	Model : GMA25-120200-1A InputL:100-240V~50/60Hz 1.0A Output:12V---2.0A		
Hardware version:	V1.0		
Software version:	V1.0		
Test Mode(S)			
Mode:	WCDMA Band IV;LTE Band 4;LTE Band 7;LTE Band 12; LTE Band 13;LTE Band 38; LTE Band 40; LTE Band 41; LTE Band 66;		
Modulation Type:	(WCDMA)QPSK; (LTE)QPSK 16QAM		
Operating Frequency Range(S)	Band	Tx(MHz)	Rx(MHz)
	WCDMA Band IV	1710~1755	2110~2155
	LTE Band 4	1710~1755	2110~2155
	LTE Band 7	2500~2570	2620~2690
	LTE Band 12	699~716	729~746
	LTE Band 13	777~787	746~756
	LTE Band 38	2570~2620	2570~2620
	LTE Band 40	2305~2360	2305~2360
	LTE Band 41	2496~2690	2496~2690
	LTE Band 66	1710~1780	2110~2180
Release Version:	Release 9		
Category:	Cat 4		
Antenna type:	External Antenna		
Antenna gain:	WCDMA Band IV: 3.50dBi LTE Band 4: 3.50dBi LTE Band 7: 3.50dBi LTE Band 12: 3.50dBi LTE Band 13: 3.50dBi LTE Band 38: 3.50dBi LTE Band 40: 3.50dBi LTE Band 41: 3.50dBi LTE Band 66: 3.50dBi		

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2024/04/30	2025/04/29
Limitator	ROHDE & SCHWARZ	ESH3-Z2	100408	2024/04/30	2025/04/29
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2024/04/30	2025/04/29
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
EMI Test Receiver	R&S	ESCI	1166.5950.03	2024/04/30	2025/04/29
Spectrum Analyzer	Agilent	N9020A	US46220290	2024/05/02	2025/05/01
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/05/02	2025/05/01
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/12/23	2024/12/22
Active Loop Antenna	Da Ze	ZN30900A	/	2024/04/30	2025/04/29
Amplifier	Agilent	8449B	3008A02306	2024/04/30	2025/04/29
Amplifier	Brief&Smart	LNA-4018	2104197	2024/05/03	2025/05/02
Temperature/Humidity Meter	Ji Yu	MC501	/	2024/05/04	2025/05/03
Power measurement module	TSTPASS	TSPS2023R	TSCB220016	2024/05/03	2025/05/02
Power Sensor	Agilent	U2021XA	MY53340004	2024/05/04	2025/05/03
Power Sensor	Agilent	U2021XA	MY54080012	2024/05/03	2025/05/02
Spectrum Analyzer	RS	FSP	1164.4391.38	2024/05/03	2025/05/02
Test Software					
Name of Software			Version		
TST-PASS			V2.0		
EZ_EMG(Below 1GHz)			V1.1.4.2		
EZ_EMG((Above 1GHz)			V1.1.4.2		

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with of the Part 27 Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS


3.1. Output Power

LIMIT


According to §27.50 (d) (4): Fixed, mobile, and portable (hand- held) stations operating in are limited to 1 watt EIRP.

TEST CONFIGURATION

Conducted Power Measurement

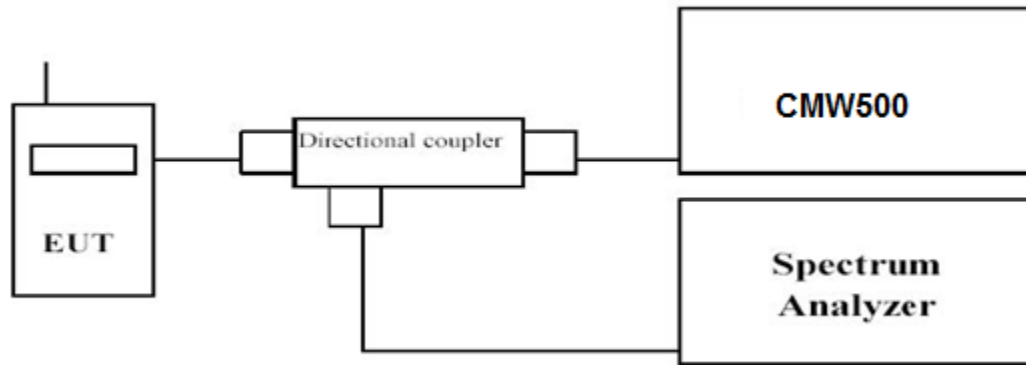

Radiated Power Measurement:

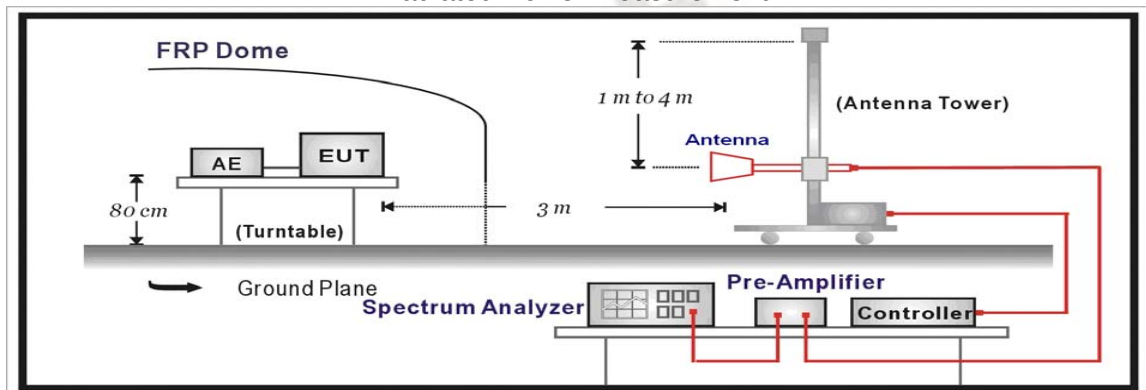

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.

- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS

Conducted Measurement :

1. please refer to Appendix for 3G_WCDMA_band_4: Section 1
2. please refer to Appendix for 4G_LTE_band_4: Section 1
3. please refer to Appendix for 4G_LTE_band_7: Section 1
4. please refer to Appendix for 4G_LTE_band_12: Section 1
5. please refer to Appendix for 4G_LTE_band_13: Section 1
6. please refer to Appendix for 4G_LTE_band_38: Section 1
7. please refer to Appendix for 4G_LTE_band_40: Section 1
8. please refer to Appendix for 4G_LTE_band_41: Section 1
9. please refer to Appendix for 4G_LTE_band_66: Section 1

Radiated Measurement:

Limits

Rule Part 27.50(b)(10) specifies that " Portable stations (hand-held devices) transmitting in the 746~757 MHz , 776MHz~788MHz, and 805~806MHz bands are limited to 3 watts ERP "

Rule Part 27.50(c)(10) specifies that " Portable stations (hand-held devices) in the 600MHz uplink band and the 698-746MHz band, and mobile stations in the 600MHz uplink band are limited to 3 watts ERP "

Rule Part 27.50(d)(4) specifies that " mobile stations (hand-held) stations operating in the 1710~1755 MHz , band and mobile and portable stations operating in the 1695MHz~1710MHz and 1755~1780MHz bands are limited to 1 watts ERP "

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of WCDMA Band IV, LTE Band 4, LTE Band 7, LTE Band 12, LTE Band 13, LTE Band 38, LTE Band 40, LTE Band 41, LTE Band 66
Recorded worst case for each Channel Bandwidth of WCDMA Band IV, LTE Band 4, LTE Band 7, LTE Band 12, LTE Band 13, LTE Band 38, LTE Band 40, LTE Band 41, LTE Band 66.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
3. $ERP = EIRP - 2.15dBi$ as EIRP by subtracting the gain of the dipole.

WCDMA Band IV

Frequency (MHz)	P _{mea}	P _{cl}	G _a	P _{ag}	ERP	Limit	Margin
1712.4	-16.40	3.93	9.05	34.96	23.68	30.00	-6.32
1732.6	-16.05	3.93	8.89	35.01	23.92	30.00	-6.08
1752.6	-16.63	3.94	8.76	35.08	23.27	30.00	-6.73

LTE FDD Band 4

Bandwidth	Frequency (MHz)	Pmea	Pcl	Ga	Pag	ERP	Limit	Margin
1.4MHz QPSK	1710.7	-17.69	3.93	9.05	34.96	22.39	30.00	-7.61
	1732.5	-18.53	3.93	8.89	35.01	21.44	30.00	-8.56
	1754.3	-18.86	3.94	8.76	35.08	21.04	30.00	-8.96
3MHz QPSK	1711.5	-17.49	3.93	9.05	34.96	22.59	30.00	-7.41
	1732.5	-18.74	3.93	8.89	35.01	21.23	30.00	-8.77
	1753.5	-18.95	3.94	8.76	35.08	20.95	30.00	-9.05
5MHz QPSK	1712.5	-17.42	3.93	9.05	34.96	22.66	30.00	-7.34
	1732.5	-18.75	3.93	8.89	35.01	21.22	30.00	-8.78
	1752.5	-19.01	3.94	8.76	35.08	20.89	30.00	-9.11
10MHz QPSK	1715	-17.65	3.93	9.05	34.96	22.43	30.00	-7.57
	1732.5	-18.84	3.93	8.89	35.01	21.13	30.00	-8.87
	1750	-19.07	3.94	8.76	35.08	20.83	30.00	-9.17
15MHz QPSK	1717.5	-17.65	3.93	9.05	34.96	22.43	30.00	-7.57
	1732.5	-18.86	3.93	8.89	35.01	21.11	30.00	-8.89
	1747.5	-19.21	3.94	8.76	35.08	20.69	30.00	-9.31
20MHz QPSK	1720.0	-17.43	3.93	9.05	34.96	22.65	30.00	-7.35
	1732.5	-18.85	3.93	8.89	35.01	21.12	30.00	-8.88
	1745.0	-18.99	3.94	8.76	35.08	20.91	30.00	-9.09
1.4MHz 16QAM	1710.7	-17.38	3.93	9.05	34.96	22.70	30.00	-7.30
	1732.5	-18.62	3.93	8.89	35.01	21.35	30.00	-8.65
	1754.3	-18.89	3.94	8.76	35.08	21.01	30.00	-8.99
3MHz 16QAM	1711.5	-17.58	3.93	9.05	34.96	22.50	30.00	-7.50
	1732.5	-18.79	3.93	8.89	35.01	21.18	30.00	-8.82
	1753.5	-18.92	3.94	8.76	35.08	20.98	30.00	-9.02
5MHz 16QAM	1712.5	-17.70	3.93	9.05	34.96	22.38	30.00	-7.62
	1732.5	-18.57	3.93	8.89	35.01	21.40	30.00	-8.60
	1752.5	-19.22	3.94	8.76	35.08	20.68	30.00	-9.32
10MHz 16QAM	1715	-17.55	3.93	9.05	34.96	22.53	30.00	-7.47
	1732.5	-18.51	3.93	8.89	35.01	21.46	30.00	-8.54
	1750	-18.89	3.94	8.76	35.08	21.01	30.00	-8.99
15MHz 16QAM	1717.5	-17.69	3.93	9.05	34.96	22.39	30.00	-7.61
	1732.5	-18.49	3.93	8.89	35.01	21.48	30.00	-8.52
	1747.5	-18.98	3.94	8.76	35.08	20.92	30.00	-9.08
20MHz 16QAM	1720.0	-17.73	3.93	9.05	34.96	22.35	30.00	-7.65
	1732.5	-18.63	3.93	8.89	35.01	21.34	30.00	-8.66
	1745.0	-18.87	3.94	8.76	35.08	21.03	30.00	-8.97

LTE FDD Band 7

Bandwidth	Frequency (MHz)	Pmea	Pcl	Ga	Pag	ERP	Limit	Margin
5MHz QPSK	2502.5	-17.73	4.03	8.38	35.51	22.13	33.01	-10.88
	2535	-18.81	4.08	8.33	35.56	21.00	33.01	-12.01
	2567.5	-19.02	4.14	8.26	35.63	20.73	33.01	-12.28
10MHz QPSK	2505	-17.57	4.03	8.38	35.51	22.29	33.01	-10.72
	2535	-18.79	4.08	8.33	35.56	21.02	33.01	-11.99
	2565	-18.89	4.14	8.26	35.63	20.86	33.01	-12.15
5MHz 16QAM	2502.5	-17.72	4.03	8.38	35.51	22.14	33.01	-10.87
	2535	-18.77	4.08	8.33	35.56	21.04	33.01	-11.97
	2567.5	-18.94	4.14	8.26	35.63	20.81	33.01	-12.20
10MHz 16QAM	2505	-17.53	4.03	8.38	35.51	22.33	33.01	-10.68
	2535	-18.84	4.08	8.33	35.56	20.97	33.01	-12.04
	2565	-18.93	4.14	8.26	35.63	20.82	33.01	-12.19

LTE FDD Band 12

Bandwidth	Frequency (MHz)	Pmea	Pcl	Ga	Pag	ERP	Limit	Margin
1.4MHz QPSK	699.7	-18.94	3.12	9.78	35.23	20.80	34.77	-13.97
	707.5	-20.68	3.16	9.45	35.45	18.91	34.77	-15.86
	715.3	-20.02	3.19	9.33	35.65	19.62	34.77	-15.15
3MHz QPSK	700.5	-19.16	3.12	9.78	35.23	20.58	34.77	-14.19
	707.5	-20.74	3.16	9.45	35.45	18.85	34.77	-15.92
	714.5	-20.06	3.19	9.33	35.65	19.58	34.77	-15.19
5MHz QPSK	701.5	-18.91	3.12	9.78	35.23	20.83	34.77	-13.94
	707.5	-20.72	3.16	9.45	35.45	18.87	34.77	-15.90
	713.5	-19.88	3.19	9.33	35.65	19.76	34.77	-15.01
10MHz QPSK	704.0	-18.88	3.12	9.78	35.23	20.86	34.77	-13.91
	707.5	-20.55	3.16	9.45	35.45	19.04	34.77	-15.73
	711.0	-20.08	3.19	9.33	35.65	19.56	34.77	-15.21
1.4MHz 16QAM	699.7	-18.95	3.12	9.78	35.23	20.79	34.77	-13.93
	707.5	-20.58	3.16	9.45	35.45	19.01	34.77	-15.97
	715.3	-19.87	3.19	9.33	35.65	19.77	34.77	-14.87
3MHz 16QAM	700.5	-19.05	3.12	9.78	35.23	20.69	34.77	-14.08
	707.5	-20.67	3.16	9.45	35.45	18.92	34.77	-15.85
	714.5	-19.89	3.19	9.33	35.65	19.75	34.77	-15.02
5MHz 16QAM	701.5	-19.04	3.12	9.78	35.23	20.70	34.77	-14.07
	707.5	-20.81	3.16	9.45	35.45	18.78	34.77	-15.99
	713.5	-19.73	3.19	9.33	35.65	19.91	34.77	-14.86
10MHz 16QAM	704.0	-19.23	3.12	9.78	35.23	20.51	34.77	-14.26
	707.5	-20.63	3.16	9.45	35.45	18.96	34.77	-15.81
	711.0	-19.84	3.19	9.33	35.65	19.80	34.77	-14.97

LTE FDD Band 13

Bandwidth	Frequency (MHz)	Pmea	Pcl	Ga	Pag	ERP	Limit	Margin
5MHz QPSK	779.5	-18.33	3.12	9.78	35.23	21.41	34.77	-13.36
	782	-17.69	3.16	9.45	35.45	21.90	34.77	-12.87
	784.5	-19.03	3.19	9.33	35.65	20.61	34.77	-14.16
10MHz QPSK	779.5	-18.48	3.12	9.78	35.23	21.26	34.77	-13.51
	782	-17.83	3.16	9.45	35.45	21.76	34.77	-13.01
	784.5	-18.82	3.19	9.33	35.65	20.82	34.77	-13.95
5MHz 16QAM	779.5	-18.50	3.12	9.78	35.23	21.24	34.77	-13.53
	782	-17.70	3.16	9.45	35.45	21.89	34.77	-12.88
	784.5	-19.03	3.19	9.33	35.65	20.61	34.77	-14.16
10MHz 16QAM	779.5	-18.50	3.12	9.78	35.23	21.24	34.77	-13.53
	782	-17.54	3.16	9.45	35.45	22.05	34.77	-12.72
	784.5	-19.00	3.19	9.33	35.65	20.64	34.77	-14.13

LTE FDD Band 38

Bandwidth	Frequency (MHz)	Pmea	Pcl	Ga	Pag	ERP	Limit	Margin
5MHz QPSK	2572.5	-17.65	4.03	8.38	35.51	22.21	33.01	-10.80
	2595	-18.53	4.08	8.33	35.56	21.28	33.01	-11.73
	2617.5	-18.98	4.14	8.26	35.63	20.77	33.01	-12.24
10MHz QPSK	2575	-17.43	4.03	8.38	35.51	22.43	33.01	-10.58
	2595	-18.79	4.08	8.33	35.56	21.02	33.01	-11.99
	2615	-19.00	4.14	8.26	35.63	20.75	33.01	-12.26
15MHz QPSK	2577.5	-17.40	4.03	8.38	35.51	22.46	33.01	-10.55
	2595	-18.58	4.08	8.33	35.56	21.23	33.01	-11.78
	2612.5	-19.21	4.14	8.26	35.63	20.54	33.01	-12.47
20MHz QPSK	2580	-17.46	4.03	8.38	35.51	22.40	33.01	-10.61
	2595	-18.71	4.08	8.33	35.56	21.10	33.01	-11.91
	2610	-19.07	4.14	8.26	35.63	20.68	33.01	-12.33
5MHz 16QAM	2572.5	-17.75	4.03	8.38	35.51	22.11	33.01	-10.90
	2595	-18.78	4.08	8.33	35.56	21.03	33.01	-11.98
	2617.5	-19.21	4.14	8.26	35.63	20.54	33.01	-12.47
10MHz 16QAM	2575	-17.72	4.03	8.38	35.51	22.14	33.01	-10.87
	2595	-18.83	4.08	8.33	35.56	20.98	33.01	-12.03
	2615	-19.13	4.14	8.26	35.63	20.62	33.01	-12.39
15MHz 16QAM	2577.5	-17.72	4.03	8.38	35.51	22.14	33.01	-10.87
	2595	-18.52	4.08	8.33	35.56	21.29	33.01	-11.72
	2612.5	-18.95	4.14	8.26	35.63	20.80	33.01	-12.21
20MHz 16QAM	2580	-17.49	4.03	8.38	35.51	22.37	33.01	-10.64
	2595	-18.57	4.08	8.33	35.56	21.24	33.01	-11.77
	2610	-19.13	4.14	8.26	35.63	20.62	33.01	-12.39

LTE FDD Band 40

Bandwidth	Frequency (MHz)	Pmea	Pcl	Ga	Pag	ERP	Limit	Margin
5MHz QPSK	2498.5	-17.40	4.03	8.38	35.51	22.46	33.01	-10.55
	2593.0	-18.60	4.08	8.33	35.56	21.21	33.01	-11.80
	2687.5	-18.99	4.14	8.26	35.63	20.76	33.01	-12.25
10MHz QPSK	2501.0	-17.55	4.03	8.38	35.51	22.31	33.01	-10.70
	2593.0	-18.73	4.08	8.33	35.56	21.08	33.01	-11.93
	2685.0	-19.17	4.14	8.26	35.63	20.58	33.01	-12.43
15MHz QPSK	2503.5	-17.72	4.03	8.38	35.51	22.14	33.01	-10.87
	2593.0	-18.62	4.08	8.33	35.56	21.19	33.01	-11.82
	2682.5	-18.93	4.14	8.26	35.63	20.82	33.01	-12.19
20MHz QPSK	2506.0	-17.36	4.03	8.38	35.51	22.50	33.01	-10.51
	2593.0	-18.81	4.08	8.33	35.56	21.00	33.01	-12.01
	2680.0	-18.96	4.14	8.26	35.63	20.79	33.01	-12.22
5MHz 16QAM	2498.5	-17.66	4.03	8.38	35.51	22.20	33.01	-10.81
	2593.0	-18.68	4.08	8.33	35.56	21.13	33.01	-11.88
	2687.5	-19.20	4.14	8.26	35.63	20.55	33.01	-12.46
10MHz 16QAM	2501.0	-17.76	4.03	8.38	35.51	22.10	33.01	-10.91
	2593.0	-18.85	4.08	8.33	35.56	20.96	33.01	-12.05
	2685.0	-19.15	4.14	8.26	35.63	20.60	33.01	-12.41
15MHz 16QAM	2503.5	-17.51	4.03	8.38	35.51	22.35	33.01	-10.66
	2593.0	-18.60	4.08	8.33	35.56	21.21	33.01	-11.80
	2682.5	-19.00	4.14	8.26	35.63	20.75	33.01	-12.26
20MHz 16QAM	2506.0	-17.64	4.03	8.38	35.51	22.22	33.01	-10.79
	2593.0	-18.87	4.08	8.33	35.56	20.94	33.01	-12.07
	2680.0	-18.90	4.14	8.26	35.63	20.85	33.01	-12.16

LTE FDD Band 41

Bandwidth	Frequency (MHz)	Pmea	Pcl	Ga	Pag	ERP	Limit	Margin
5MHz QPSK	2498.5	-15.17	4.52	8.62	36.32	25.25	34.77	-9.52
	2593	-16.87	4.61	9.03	36.11	23.66	34.77	-11.11
	2687.5	-15.87	4.78	8.95	36.07	24.37	34.77	-10.40
10MHz QPSK	2501	-15.24	4.52	8.62	36.32	25.18	34.77	-9.59
	2593	-16.66	4.61	9.03	36.11	23.87	34.77	-10.90
	2685	-16.14	4.78	8.95	36.07	24.10	34.77	-10.67
15MHz QPSK	2503.5	-15.25	4.52	8.62	36.32	25.17	34.77	-9.60
	2593	-16.75	4.61	9.03	36.11	23.78	34.77	-10.99
	2682.5	-15.98	4.78	8.95	36.07	24.26	34.77	-10.51
20MHz QPSK	2506	-15.25	4.52	8.62	36.32	25.17	34.77	-9.60
	2593	-16.75	4.61	9.03	36.11	23.78	34.77	-10.99
	2680	-16.06	4.78	8.95	36.07	24.18	34.77	-10.59
5MHz 16QAM	2498.5	-15.43	4.52	8.62	36.32	24.99	34.77	-9.78
	2593	-16.82	4.61	9.03	36.11	23.71	34.77	-11.06
	2687.5	-16.04	4.78	8.95	36.07	24.20	34.77	-10.57
10MHz 16QAM	2501	-15.40	4.52	8.62	36.32	25.02	34.77	-9.75
	2593	-16.66	4.61	9.03	36.11	23.87	34.77	-10.90
	2685	-16.18	4.78	8.95	36.07	24.06	34.77	-10.71
15MHz 16QAM	2503.5	-15.18	4.52	8.62	36.32	25.24	34.77	-9.53
	2593	-16.76	4.61	9.03	36.11	23.77	34.77	-11.00
	2682.5	-16.18	4.78	8.95	36.07	24.06	34.77	-10.71
20MHz 16QAM	2506	-15.47	4.52	8.62	36.32	24.95	34.77	-9.82
	2593	-16.83	4.61	9.03	36.11	23.70	34.77	-11.07
	2680	-16.00	4.78	8.95	36.07	24.24	34.77	-10.53

LTE FDD Band 66

Bandwidth	Frequency (MHz)	Pmea	Pcl	Ga	Pag	ERP	Limit	Margin
1.4MHz QPSK	1710.7	-17.49	3.93	9.05	34.96	22.59	30.00	-7.41
	1745.0	-18.52	3.93	8.89	35.01	21.45	30.00	-8.55
	1779.3	-18.95	3.94	8.76	35.08	20.95	30.00	-9.05
3MHz QPSK	1711.5	-17.47	3.93	9.05	34.96	22.61	30.00	-7.39
	1745.0	-18.78	3.93	8.89	35.01	21.19	30.00	-8.81
	1778.5	-18.94	3.94	8.76	35.08	20.96	30.00	-9.04
5MHz QPSK	1712.5	-17.47	3.93	9.05	34.96	22.61	30.00	-7.39
	1745.5	-18.79	3.93	8.89	35.01	21.18	30.00	-8.82
	1777.5	-19.20	3.94	8.76	35.08	20.70	30.00	-9.30
10MHz QPSK	1715.0	-17.45	3.93	9.05	34.96	22.63	30.00	-7.37
	1745.0	-18.60	3.93	8.89	35.01	21.37	30.00	-8.63
	1775.0	-19.06	3.94	8.76	35.08	20.84	30.00	-9.16
15MHz QPSK	1717.5	-17.49	3.93	9.05	34.96	22.59	30.00	-7.41
	1745.0	-18.55	3.93	8.89	35.01	21.42	30.00	-8.58
	1772.5	-19.05	3.94	8.76	35.08	20.85	30.00	-9.15
20MHz QPSK	1720.0	-17.51	3.93	9.05	34.96	22.57	30.00	-7.43
	1745.0	-18.50	3.93	8.89	35.01	21.47	30.00	-8.53
	1770.0	-19.10	3.94	8.76	35.08	20.80	30.00	-9.20
1.4MHz 16QAM	1710.7	-17.75	3.93	9.05	34.96	22.33	30.00	-7.67
	1745.0	-18.58	3.93	8.89	35.01	21.39	30.00	-8.61
	1779.3	-18.94	3.94	8.76	35.08	20.96	30.00	-9.04
3MHz 16QAM	1711.5	-17.76	3.93	9.05	34.96	22.32	30.00	-7.68
	1745.0	-18.80	3.93	8.89	35.01	21.17	30.00	-8.83
	1778.5	-19.09	3.94	8.76	35.08	20.81	30.00	-9.19
5MHz	1712.5	-17.72	3.93	9.05	34.96	22.36	30.00	-7.64


16QAM	1745.0	-18.86	3.93	8.89	35.01	21.11	30.00	-8.89
	1777.5	-19.20	3.94	8.76	35.08	20.70	30.00	-9.30
10MHz 16QAM	1715.0	-17.55	3.93	9.05	34.96	22.53	30.00	-7.47
	1745.0	-18.86	3.93	8.89	35.01	21.11	30.00	-8.89
	1775.0	-19.22	3.94	8.76	35.08	20.68	30.00	-9.32
15MHz 16QAM	1717.5	-17.38	3.93	9.05	34.96	22.70	30.00	-7.30
	1745.0	-18.60	3.93	8.89	35.01	21.37	30.00	-8.63
	1772.5	-19.00	3.94	8.76	35.08	20.90	30.00	-9.10
20MHz 16QAM	1720.0	-17.58	3.93	9.05	34.96	22.50	30.00	-7.50
	1745.0	-18.82	3.93	8.89	35.01	21.15	30.00	-8.85
	1770.0	-19.02	3.94	8.76	35.08	20.88	30.00	-9.12

3.2. Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

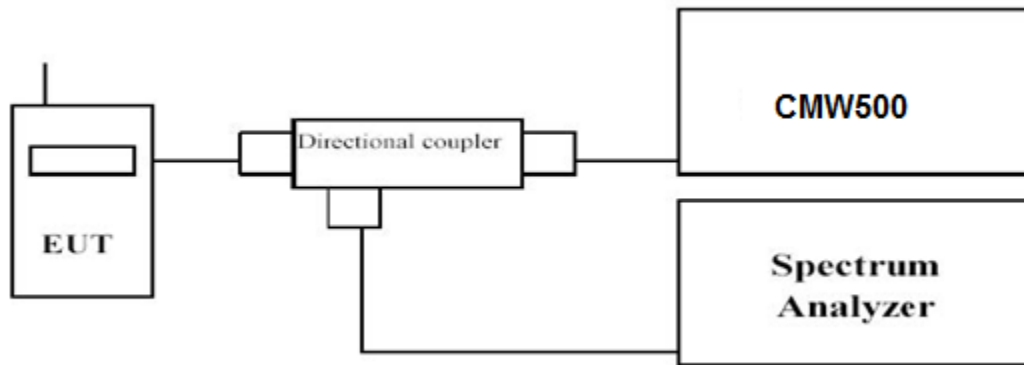

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS


1. please refer to Appendix for 3G_WCDMA_band_4: Section 4
2. please refer to Appendix for 4G_LTE_band_4: Section 4
3. please refer to Appendix for 4G_LTE_band_7: Section 4
4. please refer to Appendix for 4G_LTE_band_12: Section 4
5. please refer to Appendix for 4G_LTE_band_13: Section 4
6. please refer to Appendix for 4G_LTE_band_38: Section 4
7. please refer to Appendix for 4G_LTE_band_40: Section 4
8. please refer to Appendix for 4G_LTE_band_41: Section 4
9. please refer to Appendix for 4G_LTE_band_66: Section 4

3.3. Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

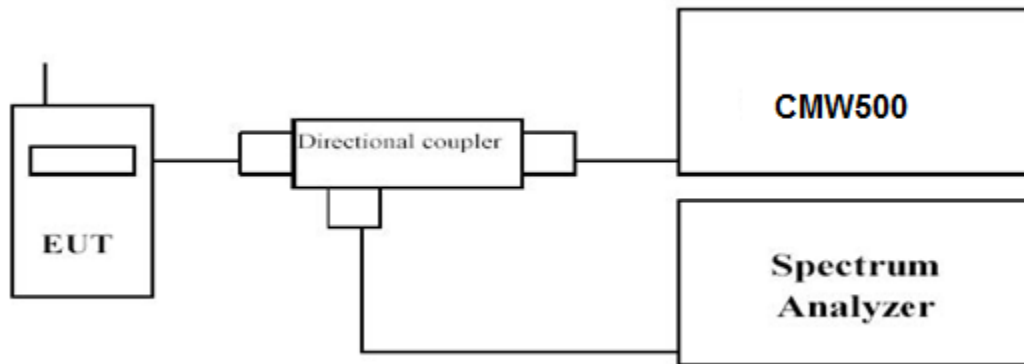

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS


1. please refer to Appendix for 3G_WCDMA_band_4: Section 3
2. please refer to Appendix for 4G_LTE_band_4: Section 3
3. please refer to Appendix for 4G_LTE_band_7: Section 3
4. please refer to Appendix for 4G_LTE_band_12: Section 3
5. please refer to Appendix for 4G_LTE_band_13: Section 3
6. please refer to Appendix for 4G_LTE_band_38: Section 3
7. please refer to Appendix for 4G_LTE_band_40: Section 3
8. please refer to Appendix for 4G_LTE_band_41: Section 3
9. please refer to Appendix for 4G_LTE_band_66: Section 3

3.4. Band Edge compliance

LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

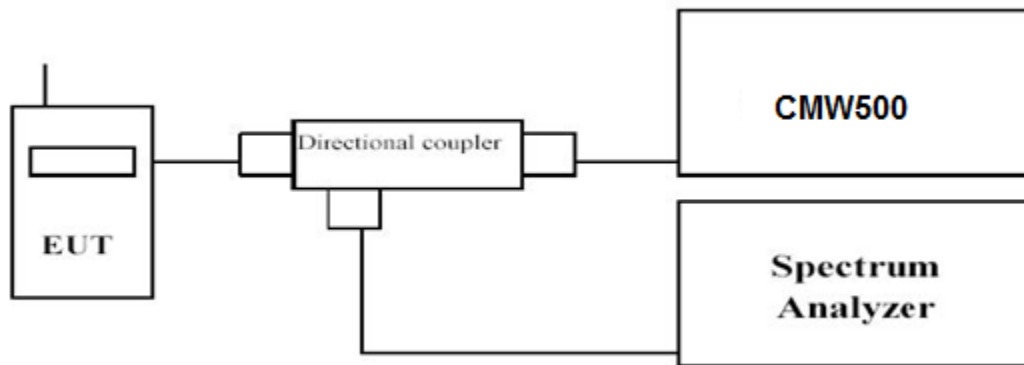

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS

1. please refer to Appendix for 3G_WCDMA_band_4: Section 5
2. please refer to Appendix for 4G_LTE_band_4: Section 5
3. please refer to Appendix for 4G_LTE_band_7: Section 5
4. please refer to Appendix for 4G_LTE_band_12: Section 5
5. please refer to Appendix for 4G_LTE_band_13: Section 5
6. please refer to Appendix for 4G_LTE_band_38: Section 5
7. please refer to Appendix for 4G_LTE_band_40: Section 5
8. please refer to Appendix for 4G_LTE_band_41: Section 5
9. please refer to Appendix for 4G_LTE_band_66: Section 5


3.5. Spurious Emission

LIMIT


According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

Conducted Spurious Measurement:

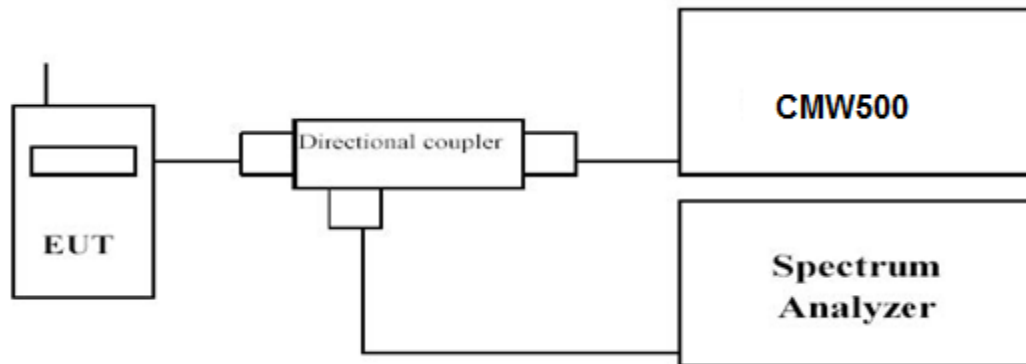

Radiated Spurious Measurement:

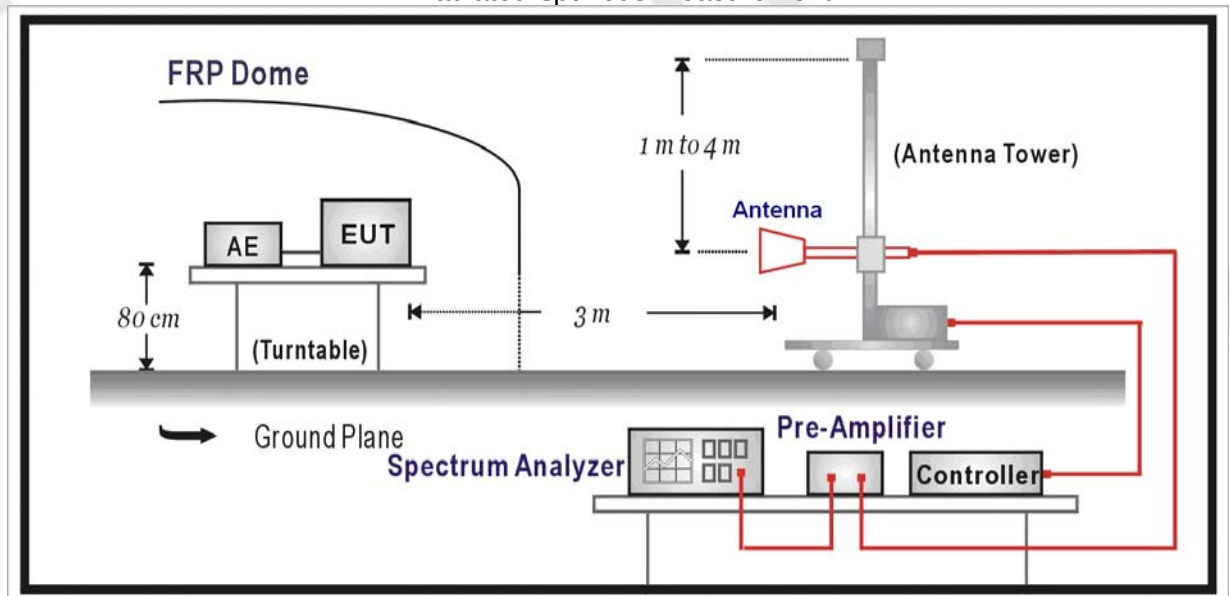

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- r. Test site anechoic chamber refer to ANSI C63.

TEST RESULTS**Conducted Measurement :**

1. please refer to Appendix for 3G_WCDMA_band_4: Section 5
2. please refer to Appendix for 4G_LTE_band_4: Section 5
3. please refer to Appendix for 4G_LTE_band_7: Section 5
4. please refer to Appendix for 4G_LTE_band_12: Section 5
5. please refer to Appendix for 4G_LTE_band_13: Section 5
6. please refer to Appendix for 4G_LTE_band_38: Section 5
7. please refer to Appendix for 4G_LTE_band_40: Section 5

8. please refer to Appendix for 4G_LTE_band_41: Section 5
 9. please refer to Appendix for 4G_LTE_band_66: Section 5

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of WCDMA Band IV, *LTE Band 4*, *LTE Band 7*, *LTE Band 12*, *LTE Band 13*, *LTE Band 38*, *LTE Band 40*, *LTE Band 41*, *LTE Band 66*;
 Recorded worst case for each Channel Bandwidth of WCDMA Band IV, *LTE Band 4*, *LTE Band 7*, *LTE Band 12*, *LTE Band 13*, *LTE Band 38*, *LTE Band 40*, *LTE Band 41*, *LTE Band 66* QPSK.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. Margin = EIRP- Limit

WCDMA Band IV _ Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3424.8	-50.12	4.62	3.00	9.81	-44.93	-13.00	-31.93	H
5137.2	-51.04	5.94	3.00	10.86	-46.12	-13.00	-33.12	H
3424.8	-52.41	4.62	3.00	9.81	-47.22	-13.00	-34.22	V
5137.2	-54.18	5.94	3.00	10.86	-49.26	-13.00	-36.26	V

WCDMA Band IV _ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.2	-49.31	4.63	3.00	9.84	-44.10	-13.00	-31.10	H
5197.8	-51.16	5.94	3.00	10.86	-46.24	-13.00	-33.24	H
3465.2	-52.91	4.63	3.00	9.84	-47.70	-13.00	-34.70	V
5197.8	-54.76	5.94	3.00	10.86	-49.84	-13.00	-36.84	V

WCDMA Band IV _ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3505.2	-51.68	4.65	3.00	9.90	-46.43	-13.00	-33.43	H
5254.1	-53.03	5.95	3.00	10.91	-48.07	-13.00	-35.07	H
3505.2	-53.93	4.65	3.00	9.90	-48.68	-13.00	-35.68	V
5254.1	-54.68	5.95	3.00	10.91	-49.72	-13.00	-36.72	V

LTE Band 4 Channel Bandwidth 1.4MHz_QPSK _ Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.4	-48.50	4.62	3.00	9.81	-43.31	-13.00	-30.31	H
5132.1	-52.17	5.94	3.00	10.86	-47.25	-13.00	-34.25	H
3421.4	-52.56	4.62	3.00	9.81	-47.37	-13.00	-34.37	V
5132.1	-54.86	5.94	3.00	10.86	-49.94	-13.00	-36.94	V

LTE Band 4 Channel Bandwidth 1.4MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-48.99	4.63	3.00	9.84	-43.78	-13.00	-30.78	H
5197.5	-52.21	5.94	3.00	10.86	-47.29	-13.00	-34.29	H
3465.0	-52.75	4.63	3.00	9.84	-47.54	-13.00	-34.54	V
5197.5	-55.37	5.94	3.00	10.86	-50.45	-13.00	-37.45	V

LTE Band 4 Channel Bandwidth 1.4MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3508.6	-52.06	4.65	3.00	9.9	-46.81	-13.00	-33.81	H
5262.9	-53.31	5.95	3.00	10.91	-48.35	-13.00	-35.35	H
3508.6	-55.02	4.65	3.00	9.9	-49.77	-13.00	-36.77	V
5262.9	-56.10	5.95	3.00	10.91	-51.14	-13.00	-38.14	V

LTE Band 4 Channel Bandwidth 3MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3423.0	-48.41	4.62	3.00	9.81	-43.22	-13.00	-30.22	H
5134.5	-52.08	5.94	3.00	10.86	-47.16	-13.00	-34.16	H
3423.0	-52.56	4.62	3.00	9.81	-47.37	-13.00	-34.37	V
5134.5	-54.86	5.94	3.00	10.86	-49.94	-13.00	-36.94	V

LTE Band 4 Channel Bandwidth 3MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-48.85	4.63	3.00	9.84	-43.64	-13.00	-30.64	H
5197.5	-52.49	5.94	3.00	10.86	-47.57	-13.00	-34.57	H
3465.0	-52.99	4.63	3.00	9.84	-47.78	-13.00	-34.78	V
5197.5	-55.46	5.94	3.00	10.86	-50.54	-13.00	-37.54	V

LTE Band 4 Channel Bandwidth 3MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3507.0	-52.22	4.65	3.00	9.9	-46.97	-13.00	-33.97	H
5260.5	-53.56	5.95	3.00	10.91	-48.60	-13.00	-35.60	H
3507.0	-55.08	4.65	3.00	9.9	-49.83	-13.00	-36.83	V
5260.5	-55.90	5.95	3.00	10.91	-50.94	-13.00	-37.94	V

LTE Band 4 Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3425.0	-48.40	4.62	3.00	9.81	-43.21	-13.00	-30.21	H
5137.5	-51.87	5.94	3.00	10.86	-46.95	-13.00	-33.95	H
3425.0	-52.40	4.62	3.00	9.81	-47.21	-13.00	-34.21	V
5137.5	-54.85	5.94	3.00	10.86	-49.93	-13.00	-36.93	V

LTE Band 4 Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-48.81	4.63	3.00	9.84	-43.60	-13.00	-30.60	H
5197.5	-52.58	5.94	3.00	10.86	-47.66	-13.00	-34.66	H
3465.0	-52.75	4.63	3.00	9.84	-47.54	-13.00	-34.54	V
5197.5	-55.44	5.94	3.00	10.86	-50.52	-13.00	-37.52	V

LTE Band 4 Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3505.0	-52.26	4.65	3.00	9.9	-47.01	-13.00	-34.01	H
5257.5	-53.47	5.95	3.00	10.91	-48.51	-13.00	-35.51	H
3505.0	-54.77	4.65	3.00	9.9	-49.52	-13.00	-36.52	V
5257.5	-56.23	5.95	3.00	10.91	-51.27	-13.00	-38.27	V

LTE Band 4 Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3430.0	-48.63	4.62	3.00	9.81	-43.44	-13.00	-30.44	H
5145.0	-52.19	5.94	3.00	10.86	-47.27	-13.00	-34.27	H
3430.0	-52.65	4.62	3.00	9.81	-47.46	-13.00	-34.46	V
5145.0	-54.78	5.94	3.00	10.86	-49.86	-13.00	-36.86	V

LTE Band 4 Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-48.85	4.63	3.00	9.84	-43.64	-13.00	-30.64	H
5197.5	-52.55	5.94	3.00	10.86	-47.63	-13.00	-34.63	H
3465.0	-52.72	4.63	3.00	9.84	-47.51	-13.00	-34.51	V
5197.5	-55.13	5.94	3.00	10.86	-50.21	-13.00	-37.21	V

LTE Band 4 Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3500.0	-52.24	4.65	3.00	9.9	-46.99	-13.00	-33.99	H
5250.0	-53.33	5.95	3.00	10.91	-48.37	-13.00	-35.37	H
3500.0	-55.16	4.65	3.00	9.9	-49.91	-13.00	-36.91	V
5250.0	-56.23	5.95	3.00	10.91	-51.27	-13.00	-38.27	V

LTE Band 4 Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3435.0	-48.52	4.62	3.00	9.81	-43.33	-13.00	-30.33	H
5152.5	-51.91	5.94	3.00	10.86	-46.99	-13.00	-33.99	H
3435.0	-52.46	4.62	3.00	9.81	-47.27	-13.00	-34.27	V
5152.5	-54.76	5.94	3.00	10.86	-49.84	-13.00	-36.84	V

LTE Band 4 Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-48.89	4.63	3.00	9.84	-43.68	-13.00	-30.68	H
5197.5	-52.33	5.94	3.00	10.86	-47.41	-13.00	-34.41	H
3465.0	-52.70	4.63	3.00	9.84	-47.49	-13.00	-34.49	V
5197.5	-55.49	5.94	3.00	10.86	-50.57	-13.00	-37.57	V

LTE Band 4 Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3495.0	-52.32	4.65	3.00	9.9	-47.07	-13.00	-34.07	H
5242.5	-53.41	5.95	3.00	10.91	-48.45	-13.00	-35.45	H
3495.0	-55.15	4.65	3.00	9.9	-49.90	-13.00	-36.90	V
5242.5	-55.91	5.95	3.00	10.91	-50.95	-13.00	-37.95	V

LTE Band 4 Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3440.0	-48.62	4.62	3.00	9.81	-43.43	-13.00	-30.43	H
5160.0	-51.94	5.94	3.00	10.86	-47.02	-13.00	-34.02	H
3440.0	-52.55	4.62	3.00	9.81	-47.36	-13.00	-34.36	V
5160.0	-54.79	5.94	3.00	10.86	-49.87	-13.00	-36.87	V

LTE Band 4 Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-48.71	4.63	3.00	9.84	-43.50	-13.00	-30.50	H
5197.5	-52.51	5.94	3.00	10.86	-47.59	-13.00	-34.59	H
3465.0	-53.02	4.63	3.00	9.84	-47.81	-13.00	-34.81	V
5197.5	-55.44	5.94	3.00	10.86	-50.52	-13.00	-37.52	V

LTE Band 4 Channel Bandwidth 20MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490.0	-52.26	4.65	3.00	9.9	-47.01	-13.00	-34.01	H
5235.0	-53.41	5.95	3.00	10.91	-48.45	-13.00	-35.45	H
3490.0	-55.10	4.65	3.00	9.9	-49.85	-13.00	-36.85	V
5235.0	-56.04	5.95	3.00	10.91	-51.08	-13.00	-38.08	V

LTE Band 7 Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5005	-45.35	5.88	3.00	10.77	-40.46	-25.00	-15.46	H
7507.5	-48.12	7.12	3.00	12.26	-42.98	-25.00	-17.98	H
5005	-49.23	5.88	3.00	10.77	-44.34	-25.00	-19.34	V
7507.5	-53.62	7.12	3.00	12.26	-48.48	-25.00	-23.48	V

LTE Band 7 Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070	-42.93	5.9	3.00	10.81	-38.02	-25.00	-13.02	H
7605	-45.71	7.19	3.00	12.32	-40.58	-25.00	-15.58	H
5070	-46.67	5.9	3.00	10.81	-41.76	-25.00	-16.76	V
7605	-49.34	7.19	3.00	12.32	-44.21	-25.00	-19.21	V

LTE Band 7 Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135	-48.76	5.94	3.00	10.86	-43.84	-25.00	-18.84	H
7702.5	-54.33	7.25	3.00	12.98	-48.60	-25.00	-23.60	H
5135	-52.70	5.94	3.00	10.86	-47.78	-25.00	-22.78	V
7702.5	-56.80	7.25	3.00	12.98	-51.07	-25.00	-26.07	V

LTE Band 7 Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010	-45.47	5.88	3.00	10.77	-40.58	-25.00	-15.58	H
7515	-48.28	7.12	3.00	12.26	-43.14	-25.00	-18.14	H
5010	-49.53	5.88	3.00	10.77	-44.64	-25.00	-19.64	V
7515	-53.79	7.12	3.00	12.26	-48.65	-25.00	-23.65	V

LTE Band 7 Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070	-43.04	5.9	3.00	10.81	-38.13	-25.00	-13.13	H
7605	-45.92	7.19	3.00	12.32	-40.79	-25.00	-15.79	H
5070	-46.82	5.9	3.00	10.81	-41.91	-25.00	-16.91	V
7605	-49.46	7.19	3.00	12.32	-44.33	-25.00	-19.33	V

LTE Band 7 Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5730	-49.00	5.94	3.00	10.86	-44.08	-25.00	-19.08	H
7695	-54.49	7.25	3.00	12.98	-48.76	-25.00	-23.76	H
5730	-52.69	5.94	3.00	10.86	-47.77	-25.00	-22.77	V
7695	-56.90	7.25	3.00	12.98	-51.17	-25.00	-26.17	V

LTE Band 7 Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5015	-45.51	5.88	3.00	10.77	-40.62	-25.00	-15.62	H
7522.5	-48.10	7.12	3.00	12.26	-42.96	-25.00	-17.96	H
5015	-49.49	5.88	3.00	10.77	-44.60	-25.00	-19.60	V
7522.5	-53.79	7.12	3.00	12.26	-48.65	-25.00	-23.65	V

LTE Band 7 Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070	-43.23	5.9	3.00	10.81	-38.32	-25.00	-13.32	H
7605	-45.66	7.19	3.00	12.32	-40.53	-25.00	-15.53	H
5070	-46.80	5.9	3.00	10.81	-41.89	-25.00	-16.89	V
7605	-49.18	7.19	3.00	12.32	-44.05	-25.00	-19.05	V

LTE Band 7 Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5125	-49.02	5.94	3.00	10.86	-44.10	-25.00	-19.10	H
7687.5	-54.65	7.25	3.00	12.98	-48.92	-25.00	-23.92	H
5125	-52.44	5.94	3.00	10.86	-47.52	-25.00	-22.52	V
7687.5	-56.91	7.25	3.00	12.98	-51.18	-25.00	-26.18	V

LTE Band 7 Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5020	-45.45	5.88	3.00	10.77	-40.56	-25.00	-15.56	H
7530	-48.24	7.12	3.00	12.26	-43.10	-25.00	-18.10	H
5020	-49.42	5.88	3.00	10.77	-44.53	-25.00	-19.53	V
7530	-53.83	7.12	3.00	12.26	-48.69	-25.00	-23.69	V

LTE Band 7 Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070	-42.98	5.9	3.00	10.81	-38.07	-25.00	-13.07	H
5705	-45.81	7.19	3.00	12.32	-40.68	-25.00	-15.68	H
5070	-46.94	5.9	3.00	10.81	-42.03	-25.00	-17.03	V
5705	-49.26	7.19	3.00	12.32	-44.13	-25.00	-19.13	V

LTE Band 7 Channel Bandwidth 20MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5120	-48.87	5.94	3.00	10.86	-43.95	-25.00	-18.95	H
7680	-54.51	7.25	3.00	12.98	-48.78	-25.00	-23.78	H
5120	-52.42	5.94	3.00	10.86	-47.50	-25.00	-22.50	V
7680	-56.88	7.25	3.00	12.98	-51.15	-25.00	-26.15	V

LTE Band 12 Channel Bandwidth 1.4MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1399.40	-41.14	4.73	3.00	10.42	-35.45	-13.00	-22.45	H
2099.10	-47.69	5.64	3.00	12.30	-41.03	-13.00	-28.03	H
1399.40	-43.80	4.73	3.00	10.42	-38.11	-13.00	-25.11	V
2099.10	-50.35	5.64	3.00	12.30	-43.69	-13.00	-30.69	V

LTE Band 12 Channel Bandwidth 1.4MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.00	-39.82	4.75	3.00	10.44	-34.13	-13.00	-21.13	H
2122.50	-44.07	5.66	3.00	12.33	-37.40	-13.00	-24.40	H
1415.00	-43.87	4.75	3.00	10.44	-38.18	-13.00	-25.18	V
2122.50	-47.88	5.66	3.00	12.33	-41.21	-13.00	-28.21	V

LTE Band 12 Channel Bandwidth 1.4MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1430.60	-39.53	4.77	3.00	10.45	-33.85	-13.00	-20.85	H
2145.90	-44.73	5.69	3.00	12.36	-38.06	-13.00	-25.06	H
1430.60	-44.59	4.77	3.00	10.45	-38.91	-13.00	-25.91	V
2145.90	-50.18	5.69	3.00	12.36	-43.51	-13.00	-30.51	V

LTE Band 12 Channel Bandwidth 3MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1401.00	-41.17	4.73	3.00	10.42	-35.48	-13.00	-22.48	H
2101.50	-47.89	5.64	3.00	12.30	-41.23	-13.00	-28.23	H
1401.00	-43.77	4.73	3.00	10.42	-38.08	-13.00	-25.08	V
2101.50	-50.18	5.64	3.00	12.30	-43.52	-13.00	-30.52	V

LTE Band 12 Channel Bandwidth 3MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.00	-39.74	4.75	3.00	10.44	-34.05	-13.00	-39.74	H
2122.50	-44.16	5.66	3.00	12.33	-37.49	-13.00	-44.16	H
1415.00	-43.95	4.75	3.00	10.44	-38.26	-13.00	-43.95	V
2122.50	-47.68	5.66	3.00	12.33	-41.01	-13.00	-47.68	V

LTE Band 12 Channel Bandwidth 3MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1429.00	-39.53	4.77	3.00	10.45	-33.85	-13.00	-20.85	H
2143.50	-44.38	5.69	3.00	12.36	-37.71	-13.00	-24.71	H
1429.00	-44.73	4.77	3.00	10.45	-39.05	-13.00	-26.05	V
2143.50	-50.01	5.69	3.00	12.36	-43.34	-13.00	-30.34	V

LTE Band 12 Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1403.00	-40.87	4.73	3.00	10.42	-35.18	-13.00	-22.18	H
2104.50	-47.64	5.64	3.00	12.30	-40.98	-13.00	-27.98	H
1403.00	-43.76	4.73	3.00	10.42	-38.07	-13.00	-25.07	V
2104.50	-50.25	5.64	3.00	12.30	-43.59	-13.00	-30.59	V

LTE Band 12 Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.00	-39.91	4.75	3.00	10.44	-34.22	-13.00	-21.22	H
2122.50	-44.08	5.66	3.00	12.33	-37.41	-13.00	-24.41	H
1415.00	-43.79	4.75	3.00	10.44	-38.10	-13.00	-25.10	V
2122.50	-47.88	5.66	3.00	12.33	-41.21	-13.00	-28.21	V

LTE Band 12 Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1427.00	-39.32	4.77	3.00	10.45	-33.64	-13.00	-20.64	H
2140.50	-44.65	5.69	3.00	12.36	-37.98	-13.00	-24.98	H
1427.00	-44.58	4.77	3.00	10.45	-38.90	-13.00	-25.90	V
2140.50	-50.21	5.69	3.00	12.36	-43.54	-13.00	-30.54	V

LTE and 12 Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1408.00	-40.89	4.73	3.00	10.42	-35.20	-13.00	-22.20	H
2112.00	-47.90	5.64	3.00	12.30	-41.24	-13.00	-28.24	H
1408.00	-44.02	4.73	3.00	10.42	-38.33	-13.00	-25.33	V
2112.00	-50.16	5.64	3.00	12.30	-43.50	-13.00	-30.50	V

LTE Band 12 Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.00	-39.81	4.75	3.00	10.44	-34.12	-13.00	-21.12	H
2122.50	-44.13	5.66	3.00	12.33	-37.46	-13.00	-24.46	H
1415.00	-44.13	4.75	3.00	10.44	-38.44	-13.00	-25.44	V
2122.50	-47.74	5.66	3.00	12.33	-41.07	-13.00	-28.07	V

LTE Band 12 Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1422.00	-39.29	4.77	3.00	10.45	-33.61	-13.00	-20.61	H
2133.00	-44.46	5.69	3.00	12.36	-37.79	-13.00	-24.79	H
1422.00	-44.75	4.77	3.00	10.45	-39.07	-13.00	-26.07	V
2133.00	-50.28	5.69	3.00	12.36	-43.61	-13.00	-30.61	V

LTE Band 13 Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1559	-40.88	6.87	3.00	9.88	-37.87	-40.00	2.13	H
2338.5	-46.59	7.66	3.00	11.36	-42.89	-13.00	-29.89	H
1559	-44.53	6.87	3.00	9.88	-41.52	-40.00	-1.52	V
2338.5	-49.56	7.66	3.00	11.36	-45.86	-13.00	-32.86	V

LTE Band 13 Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1564	-40.08	6.93	3.00	10.03	-36.98	-40.00	3.02	H
2346	-47.21	7.81	3.00	11.41	-43.61	-13.00	-30.61	H
1564	-43.20	6.93	3.00	10.03	-40.10	-40.00	-0.10	V
2346	-47.34	7.81	3.00	11.41	-43.74	-13.00	-30.74	V

LTE Band 13 Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1569	-41.09	7.03	3.00	9.62	-38.50	-40.00	1.50	H
2353.5	-47.08	7.96	3.00	11.46	-43.58	-13.00	-30.58	H
1569	-43.80	7.03	3.00	9.62	-41.21	-40.00	-1.21	V
2353.5	-49.41	7.96	3.00	11.46	-45.91	-13.00	-32.91	V

LTE Band 13 Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1564	-40.90	6.87	3.00	9.88	-37.89	-40.00	2.11	H
2346	-46.36	7.66	3.00	11.36	-42.66	-13.00	-29.66	H
1564	-44.50	6.87	3.00	9.88	-41.49	-40.00	-1.49	V
2346	-49.70	7.66	3.00	11.36	-46.00	-13.00	-33.00	V

LTE Band 13 Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1564	-40.01	6.93	3.00	10.03	-36.91	-40.00	3.09	H
2346	-46.96	7.81	3.00	11.41	-43.36	-13.00	-30.36	H
1564	-43.49	6.93	3.00	10.03	-40.39	-40.00	-0.39	V
2346	-47.50	7.81	3.00	11.41	-43.90	-13.00	-30.90	V

LTE Band 13 Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1564	-41.37	7.03	3.00	9.62	-38.78	-40.00	1.22	H
2346	-46.77	7.96	3.00	11.46	-43.27	-13.00	-30.27	H
1564	-43.79	7.03	3.00	9.62	-41.20	-40.00	-1.20	V
2346	-49.20	7.96	3.00	11.46	-45.70	-13.00	-32.70	V

LTE Band 38 Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5145	-40.24	7.15	3.00	9.88	-37.51	-25.00	-12.51	H
7717.5	-45.28	8.36	3.00	11.36	-42.28	-25.00	-17.28	H
5145	-42.38	7.15	3.00	9.88	-39.65	-25.00	-14.65	V
7717.5	-47.41	8.36	3.00	11.36	-44.41	-25.00	-19.41	V

LTE Band 38 Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190	-40.20	7.26	3.00	10.03	-37.43	-25.00	-12.43	H
7785	-44.98	8.48	3.00	11.41	-42.05	-25.00	-17.05	H
5190	-44.05	7.26	3.00	10.03	-41.28	-25.00	-16.28	V
7785	-47.71	8.48	3.00	11.41	-44.78	-25.00	-19.78	V

LTE Band 38 Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5235	-42.29	7.17	3.00	9.62	-39.84	-25.00	-14.84	H
7852.5	-45.35	8.39	3.00	11.46	-42.28	-25.00	-17.28	H
5235	-42.96	7.17	3.00	9.62	-40.51	-25.00	-15.51	V
7852.5	-47.84	8.39	3.00	11.46	-44.77	-25.00	-19.77	V

LTE Band 38 Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5150	-40.05	7.15	3.00	9.88	-37.32	-25.00	-12.32	H
7725	-45.27	8.36	3.00	11.36	-42.27	-25.00	-17.27	H
5150	-42.34	7.15	3.00	9.88	-39.61	-25.00	-14.61	V
7725	-47.47	8.36	3.00	11.36	-44.47	-25.00	-19.47	V

LTE Band 38 Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190	-40.25	7.26	3.00	10.03	-37.48	-25.00	-12.48	H
7785	-45.00	8.48	3.00	11.41	-42.07	-25.00	-17.07	H
5190	-43.77	7.26	3.00	10.03	-41.00	-25.00	-16.00	V
7785	-47.53	8.48	3.00	11.41	-44.60	-25.00	-19.60	V

LTE Band 38 Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5230	-42.02	7.17	3.00	9.62	-39.57	-25.00	-14.57	H
7845	-45.46	8.39	3.00	11.46	-42.39	-25.00	-17.39	H
5230	-43.11	7.17	3.00	9.62	-40.66	-25.00	-15.66	V
7845	-47.51	8.39	3.00	11.46	-44.44	-25.00	-19.44	V

LTE Band 38 Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5155	-40.15	7.15	3.00	9.88	-37.42	-25.00	-12.42	H
7532.5	-45.40	8.36	3.00	11.36	-42.40	-25.00	-17.40	H
5155	-42.39	7.15	3.00	9.88	-39.66	-25.00	-14.66	V
7532.5	-47.52	8.36	3.00	11.36	-44.52	-25.00	-19.52	V

LTE Band 38 Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190	-40.36	7.26	3.00	10.03	-37.59	-25.00	-12.59	H
7785	-44.97	8.48	3.00	11.41	-42.04	-25.00	-17.04	H
5190	-44.03	7.26	3.00	10.03	-41.26	-25.00	-16.26	V
7785	-47.44	8.48	3.00	11.41	-44.51	-25.00	-19.51	V

LTE Band 38 Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5225	-42.02	7.17	3.00	9.62	-39.57	-25.00	-14.57	H
7687.5	-45.45	8.39	3.00	11.46	-42.38	-25.00	-17.38	H
5225	-42.90	7.17	3.00	9.62	-40.45	-25.00	-15.45	V
7687.5	-47.61	8.39	3.00	11.46	-44.54	-25.00	-19.54	V

LTE Band 38 Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5160	-40.09	7.15	3.00	9.88	-37.36	-25.00	-12.36	H
7740	-45.26	8.36	3.00	11.36	-42.26	-25.00	-17.26	H
5160	-42.35	7.15	3.00	9.88	-39.62	-25.00	-14.62	V
7740	-47.41	8.36	3.00	11.36	-44.41	-25.00	-19.41	V

LTE Band 38 Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190	-40.22	7.26	3.00	10.03	-37.45	-25.00	-12.45	H
7785	-45.06	8.48	3.00	11.41	-42.13	-25.00	-17.13	H
5190	-44.07	7.26	3.00	10.03	-41.30	-25.00	-16.30	V
7785	-47.49	8.48	3.00	11.41	-44.56	-25.00	-19.56	V

LTE Band 38 Channel Bandwidth 20MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5220	-42.30	7.17	3.00	9.62	-39.85	-25.00	-14.85	H
7830	-45.60	8.39	3.00	11.46	-42.53	-25.00	-17.53	H
5220	-42.91	7.17	3.00	9.62	-40.46	-25.00	-15.46	V
7830	-47.87	8.39	3.00	11.46	-44.80	-25.00	-19.80	V

LTE TDD Band 40 Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
4997.0	-40.27	7.15	3.00	9.88	-37.54	-25.00	-12.54	H
7495.5	-45.47	8.36	3.00	11.36	-42.47	-25.00	-17.47	H
4997.0	-42.49	7.15	3.00	9.88	-39.76	-25.00	-14.76	V
7495.5	-47.37	8.36	3.00	11.36	-44.37	-25.00	-19.37	V

LTE TDD Band 40_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-40.16	7.26	3.00	10.03	-37.39	-25.00	-12.39	H
7779.0	-45.04	8.48	3.00	11.41	-42.11	-25.00	-17.11	H
5186.0	-44.03	7.26	3.00	10.03	-41.26	-25.00	-16.26	V
7779.0	-47.55	8.48	3.00	11.41	-44.62	-25.00	-19.62	V

LTE TDD Band 40_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5375.0	-42.13	7.17	3.00	9.62	-39.68	-25.00	-14.68	H
8062.5	-45.40	8.39	3.00	11.46	-42.33	-25.00	-17.33	H
5375.0	-43.08	7.17	3.00	9.62	-40.63	-25.00	-15.63	V
8062.5	-47.69	8.39	3.00	11.46	-44.62	-25.00	-19.62	V

LTE TDD Band 40_Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5002.0	-40.13	7.15	3.00	9.88	-37.40	-25.00	-12.40	H
7503.0	-45.41	8.36	3.00	11.36	-42.41	-25.00	-17.41	H
5002.0	-42.56	7.15	3.00	9.88	-39.83	-25.00	-14.83	V
7503.0	-47.50	8.36	3.00	11.36	-44.50	-25.00	-19.50	V

LTE TDD Band 40_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-40.27	7.26	3.00	10.03	-37.50	-25.00	-12.50	H
7779.0	-45.33	8.48	3.00	11.41	-42.40	-25.00	-17.40	H
5186.0	-43.91	7.26	3.00	10.03	-41.14	-25.00	-16.14	V
7779.0	-47.54	8.48	3.00	11.41	-44.61	-25.00	-19.61	V

LTE TDD Band 40_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370.0	-42.05	7.17	3.00	9.62	-39.60	-25.00	-14.60	H
8055.0	-45.27	8.39	3.00	11.46	-42.20	-25.00	-17.20	H
5370.0	-43.01	7.17	3.00	9.62	-40.56	-25.00	-15.56	V
8055.0	-47.62	8.39	3.00	11.46	-44.55	-25.00	-19.55	V

LTE TDD Band 40_Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.0	-40.23	7.15	3.00	9.88	-37.50	-25.00	-12.50	H
7510.5	-45.21	8.36	3.00	11.36	-42.21	-25.00	-17.21	H
5007.0	-42.48	7.15	3.00	9.88	-39.75	-25.00	-14.75	V
7510.5	-47.57	8.36	3.00	11.36	-44.57	-25.00	-19.57	V

LTE TDD Band 40 Channel Bandwidth 15MHz QPSK Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-40.48	7.26	3.00	10.03	-37.71	-25.00	-12.71	H
7779.0	-45.14	8.48	3.00	11.41	-42.21	-25.00	-17.21	H
5186.0	-43.76	7.26	3.00	10.03	-40.99	-25.00	-15.99	V
7779.0	-47.43	8.48	3.00	11.41	-44.50	-25.00	-19.50	V

LTE TDD Band 40 Channel Bandwidth 15MHz QPSK High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5365.0	-42.04	7.17	3.00	9.62	-39.59	-25.00	-14.59	H
8047.5	-45.48	8.39	3.00	11.46	-42.41	-25.00	-17.41	H
5365.0	-42.99	7.17	3.00	9.62	-40.54	-25.00	-15.54	V
8047.5	-47.75	8.39	3.00	11.46	-44.68	-25.00	-19.68	V

LTE TDD Band 40 Channel Bandwidth 20MHz QPSK Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5012.0	-39.94	7.15	3.00	9.88	-37.21	-25.00	-12.21	H
7518.0	-45.30	8.36	3.00	11.36	-42.30	-25.00	-17.30	H
5012.0	-42.55	7.15	3.00	9.88	-39.82	-25.00	-14.82	V
7518.0	-47.37	8.36	3.00	11.36	-44.37	-25.00	-19.37	V

LTE TDD Band 40 Channel Bandwidth 20MHz QPSK Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-40.13	7.26	3.00	10.03	-37.36	-25.00	-12.36	H
7779.0	-45.16	8.48	3.00	11.41	-42.23	-25.00	-17.23	H
5186.0	-43.71	7.26	3.00	10.03	-40.94	-25.00	-15.94	V
7779.0	-47.65	8.48	3.00	11.41	-44.72	-25.00	-19.72	V

LTE TDD Band 40 Channel Bandwidth 20MHz QPSK High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5360.0	-41.99	7.17	3.00	9.62	-39.54	-25.00	-14.54	H
8040.0	-45.56	8.39	3.00	11.46	-42.49	-25.00	-17.49	H
5360.0	-42.80	7.17	3.00	9.62	-40.35	-25.00	-15.35	V
8040.0	-47.60	8.39	3.00	11.46	-44.53	-25.00	-19.53	V

LTE Band 41 Channel Channel Bandwidth 5MHz QPSK Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
4997	-40.28	7.15	3.00	9.88	-37.55	-25.00	-12.55	H
7495.5	-45.42	8.36	3.00	11.36	-42.42	-25.00	-17.42	H
4997	-42.31	7.15	3.00	9.88	-39.58	-25.00	-14.58	V
7495.5	-47.37	8.36	3.00	11.36	-44.37	-25.00	-19.37	V

LTE Band 41 Channel Channel Bandwidth 5MHz QPSK Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186	-40.31	7.26	3.00	10.03	-37.54	-25.00	-12.54	H
7779	-45.34	8.48	3.00	11.41	-42.41	-25.00	-17.41	H
5186	-43.91	7.26	3.00	10.03	-41.14	-25.00	-16.14	V
7779	-47.47	8.48	3.00	11.41	-44.54	-25.00	-19.54	V

LTE Band 41 Channel Channel Bandwidth 5MHz QPSK High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5375	-42.06	7.17	3.00	9.62	-39.61	-25.00	-14.61	H
8062.5	-45.28	8.39	3.00	11.46	-42.21	-25.00	-17.21	H
5375	-42.84	7.17	3.00	9.62	-40.39	-25.00	-15.39	V
8062.5	-47.88	8.39	3.00	11.46	-44.81	-25.00	-19.81	V

LTE Band 41 Channel Channel Bandwidth 10MHz QPSK Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5002	-40.20	7.15	3.00	9.88	-37.47	-25.00	-12.47	H
7503	-45.51	8.36	3.00	11.36	-42.51	-25.00	-17.51	H
5002	-42.27	7.15	3.00	9.88	-39.54	-25.00	-14.54	V
7503	-47.54	8.36	3.00	11.36	-44.54	-25.00	-19.54	V

LTE Band 41 Channel Channel Bandwidth 10MHz QPSK Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186	-40.12	7.26	3.00	10.03	-37.35	-25.00	-12.35	H
7779	-45.02	8.48	3.00	11.41	-42.09	-25.00	-17.09	H
5186	-43.82	7.26	3.00	10.03	-41.05	-25.00	-16.05	V
7779	-47.65	8.48	3.00	11.41	-44.72	-25.00	-19.72	V

LTE Band 41 Channel Channel Bandwidth 10MHz QPSK High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370	-42.12	7.17	3.00	9.62	-39.67	-25.00	-14.67	H
8055	-45.60	8.39	3.00	11.46	-42.53	-25.00	-17.53	H
5370	-42.86	7.17	3.00	9.62	-40.41	-25.00	-15.41	V
8055	-47.50	8.39	3.00	11.46	-44.43	-25.00	-19.43	V

LTE Band 41 Channel Channel Bandwidth 15MHz QPSK Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007	-39.95	7.15	3.00	9.88	-37.22	-25.00	-12.22	H
7510.5	-45.42	8.36	3.00	11.36	-42.42	-25.00	-17.42	H
5007	-42.40	7.15	3.00	9.88	-39.67	-25.00	-14.67	V
7510.5	-47.59	8.36	3.00	11.36	-44.59	-25.00	-19.59	V

LTE Band 41 Channel Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186	-40.11	7.26	3.00	10.03	-37.34	-25.00	-12.34	H
7779	-45.17	8.48	3.00	11.41	-42.24	-25.00	-17.24	H
5186	-43.75	7.26	3.00	10.03	-40.98	-25.00	-15.98	V
7779	-47.78	8.48	3.00	11.41	-44.85	-25.00	-19.85	V

LTE Band 41Channel Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5365	-42.05	7.17	3.00	9.62	-39.60	-25.00	-14.60	H
8047.5	-45.50	8.39	3.00	11.46	-42.43	-25.00	-17.43	H
5365	-42.80	7.17	3.00	9.62	-40.35	-25.00	-15.35	V
8047.5	-47.53	8.39	3.00	11.46	-44.46	-25.00	-19.46	V

LTE Band 41 Channel Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5012	-40.29	7.15	3.00	9.88	-37.56	-25.00	-12.56	H
7518	-45.37	8.36	3.00	11.36	-42.37	-25.00	-17.37	H
5012	-42.56	7.15	3.00	9.88	-39.83	-25.00	-14.83	V
7518	-47.32	8.36	3.00	11.36	-44.32	-25.00	-19.32	V

LTE Band 41 Channel Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186	-40.26	7.26	3.00	10.03	-37.49	-25.00	-12.49	H
7779	-45.10	8.48	3.00	11.41	-42.17	-25.00	-17.17	H
5186	-44.04	7.26	3.00	10.03	-41.27	-25.00	-16.27	V
7779	-47.74	8.48	3.00	11.41	-44.81	-25.00	-19.81	V

LTE Band 41 Channel Channel Bandwidth 20MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5360	-42.06	7.17	3.00	9.62	-39.61	-25.00	-14.61	H
8040	-45.36	8.39	3.00	11.46	-42.29	-25.00	-17.29	H
5360	-42.83	7.17	3.00	9.62	-40.38	-25.00	-15.38	V
8040	-47.80	8.39	3.00	11.46	-44.73	-25.00	-19.73	V

LTE Band 66 Channel Bandwidth 1.4MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.4	-40.60	7.15	3.00	9.88	-37.87	-13.00	-24.87	H
5132.1	-45.44	8.36	3.00	11.36	-42.44	-13.00	-29.44	H
3421.4	-42.43	7.15	3.00	9.88	-39.70	-13.00	-26.70	V
5132.1	-47.65	8.36	3.00	11.36	-44.65	-13.00	-31.65	V

LTE Band 66 Channel Bandwidth 1.4MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-40.16	7.26	3.00	10.03	-37.39	-13.00	-24.39	H
5197.5	-45.65	8.48	3.00	11.41	-42.72	-13.00	-29.72	H
3465.0	-43.65	7.26	3.00	10.03	-40.88	-13.00	-27.88	V
5197.5	-46.96	8.48	3.00	11.41	-44.03	-13.00	-31.03	V

LTE Band 66 Channel Bandwidth 1.4MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3507.8	-42.69	7.17	3.00	9.62	-40.24	-13.00	-27.24	H
5261.6	-45.33	8.39	3.00	11.46	-42.26	-13.00	-29.26	H
3507.8	-42.41	7.17	3.00	9.62	-39.96	-13.00	-26.96	V
5261.6	-47.84	8.39	3.00	11.46	-44.77	-13.00	-31.77	V

LTE Band 66 Channel Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2425.0	-40.76	7.15	3.00	9.88	-38.03	-13.00	-25.03	H
5131.1	-45.29	8.36	3.00	11.36	-42.29	-13.00	-29.29	H
2425.0	-42.50	7.15	3.00	9.88	-39.77	-13.00	-26.77	V
5131.1	-47.56	8.36	3.00	11.36	-44.56	-13.00	-31.56	V

LTE Band 66 Channel Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3460.0	-40.11	7.26	3.00	10.03	-37.34	-13.00	-24.34	H
5191.5	-45.54	8.48	3.00	11.41	-42.61	-13.00	-29.61	H
3460.0	-43.49	7.26	3.00	10.03	-40.72	-13.00	-27.72	V
5191.5	-47.03	8.48	3.00	11.41	-44.10	-13.00	-31.10	V

LTE Band 66 Channel Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3500.6	-42.66	7.17	3.00	9.62	-40.21	-13.00	-27.21	H
5250.8	-45.42	8.39	3.00	11.46	-42.35	-13.00	-29.35	H
3500.6	-42.37	7.17	3.00	9.62	-39.92	-13.00	-26.92	V
5250.8	-47.64	8.39	3.00	11.46	-44.57	-13.00	-31.57	V

LTE Band 66 Channel Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3420.8	-40.81	7.15	3.00	9.88	-38.08	-13.00	-25.08	H
5131.9	-45.22	8.36	3.00	11.36	-42.22	-13.00	-29.22	H
3420.8	-42.32	7.15	3.00	9.88	-39.59	-13.00	-26.59	V
5131.9	-47.38	8.36	3.00	11.36	-44.38	-13.00	-31.38	V

LTE Band 66 Channel Channel Bandwidth 10MHz QPSK Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3456.0	-40.21	7.26	3.00	10.03	-37.44	-13.00	-24.44	H
5184.4	-45.46	8.48	3.00	11.41	-42.53	-13.00	-29.53	H
3456.0	-43.51	7.26	3.00	10.03	-40.74	-13.00	-27.74	V
5184.4	-47.11	8.48	3.00	11.41	-44.18	-13.00	-31.18	V

LTE Band 66 Channel Channel Bandwidth 10MHz QPSK High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490.9	-42.75	7.17	3.00	9.62	-40.30	-13.00	-27.30	H
5236.9	-45.53	8.39	3.00	11.46	-42.46	-13.00	-29.46	H
3490.9	-42.50	7.17	3.00	9.62	-40.05	-13.00	-27.05	V
5236.9	-47.80	8.39	3.00	11.46	-44.73	-13.00	-31.73	V

LTE Band 66 Channel Channel Bandwidth 20MHz QPSK Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.9	-40.59	7.15	3.00	9.88	-37.86	-13.00	-24.86	H
5133.0	-45.29	8.36	3.00	11.36	-42.29	-13.00	-29.29	H
3421.9	-42.25	7.15	3.00	9.88	-39.52	-13.00	-26.52	V
5133.0	-47.28	8.36	3.00	11.36	-44.28	-13.00	-31.28	V

LTE Band 66 Channel Channel Bandwidth 20MHz QPSK Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3447.0	-40.09	7.26	3.00	10.03	-37.32	-13.00	-24.32	H
5170.5	-45.67	8.48	3.00	11.41	-42.74	-13.00	-29.74	H
3447.0	-43.66	7.26	3.00	10.03	-40.89	-13.00	-27.89	V
5170.5	-47.31	8.48	3.00	11.41	-44.38	-13.00	-31.38	V

LTE Band 66 Channel Channel Bandwidth 20MHz QPSK High Channel


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3472.1	-42.69	7.17	3.00	9.62	-40.24	-13.00	-27.24	H
5208.4	-45.34	8.39	3.00	11.46	-42.27	-13.00	-29.27	H
3472.1	-42.37	7.17	3.00	9.62	-39.92	-13.00	-26.92	V
5208.4	-47.81	8.39	3.00	11.46	-44.74	-13.00	-31.74	V

4. Frequency Stability under Temperature & Voltage Variations

LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

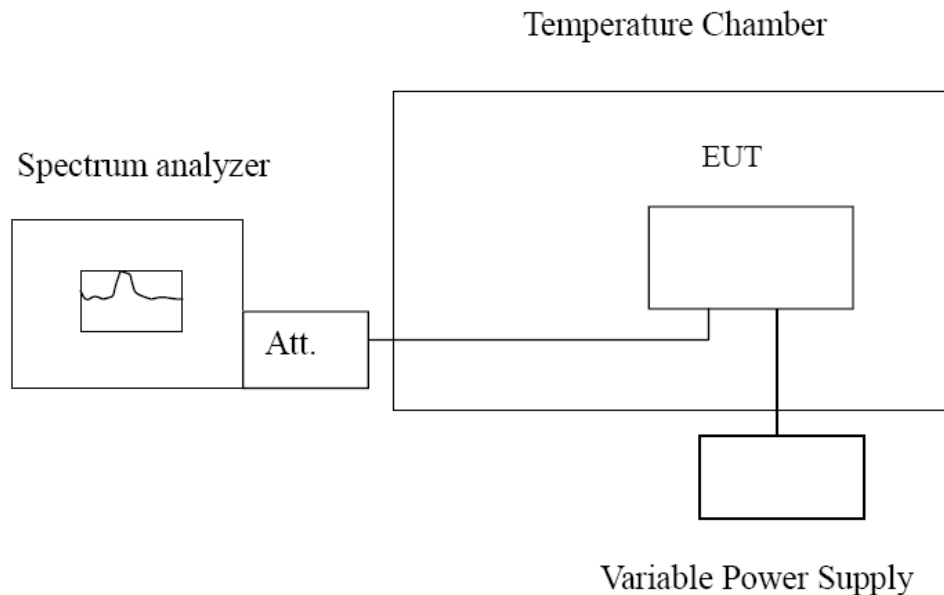

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Frequency Stability under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 4, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability under Voltage Variations:


Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.


Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

1. please refer to Appendix for 3G_WCDMA_band_4: Section 2
2. please refer to Appendix for 4G_LTE_band_4: Section 2
3. please refer to Appendix for 4G_LTE_band_7: Section 2
4. please refer to Appendix for 4G_LTE_band_12: Section 2
5. please refer to Appendix for 4G_LTE_band_13: Section 2
6. please refer to Appendix for 4G_LTE_band_38: Section 2
7. please refer to Appendix for 4G_LTE_band_40: Section 2
8. please refer to Appendix for 4G_LTE_band_41: Section 2
9. please refer to Appendix for 4G_LTE_band_66: Section 2

5. Test Setup Photos of the EUT

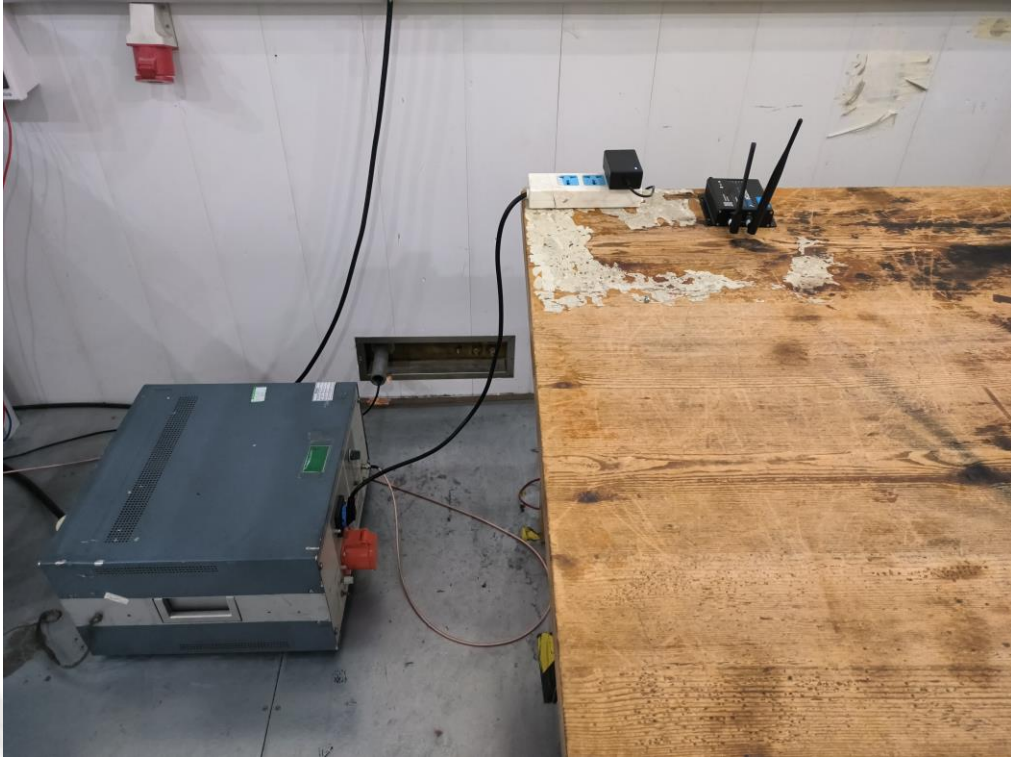

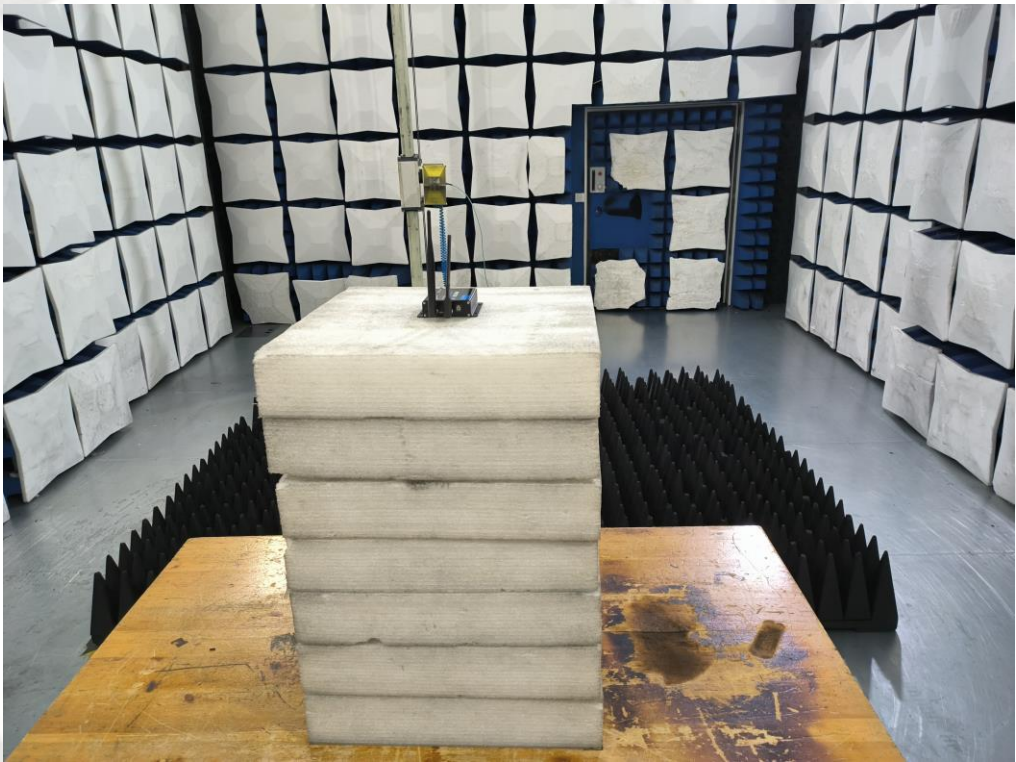

6. External and Internal Photos of the EUT

Reference to the test report No.CTL2305223051-WF01

***** End of Report *****