

**PART 90 MEASUREMENT REPORT****Applicant Name:**

Brinc Drones, Inc  
1055 N. 38th St.  
Seattle, WA 9810  
United States

**Date of Testing:**

1/20/2024 - 6/19/2024

**Test Report Issue Date:**

10/7/2024

**Test Site/Location:**

Element lab., Columbia, MD, USA

**Test Report Serial No.:**

1M2406100047-01.2BHDH

**FCC ID:****2BHDHBR00004****APPLICANT:****Brinc Drones, Inc****Application Type:**

Certification

**Model:**

LEMUR2

**EUT Type:**

Controller

**FCC Classification:**

Licensed Non-Broadcast Station Transmitter (TNB)

**FCC Rule Part:**

§90

**Test Procedure(s):**

ANSI C63.26-2015

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortiz  
Executive Vice President



FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 1 of 42

## T A B L E   O F   C O N T E N T S

---

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	Software and Firmware .....	5
2.5	EMI Suppression Device(s)/Modifications .....	5
2.6	Antenna Description .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Power and Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Conducted Output Power Data .....	11
7.3	Occupied Bandwidth .....	16
7.4	Spurious and Harmonic Emissions at Antenna Terminal .....	18
7.5	Band Edge Emissions at Antenna Terminal .....	29
7.6	Radiated Spurious Emissions Measurements .....	34
7.7	Frequency Stability / Temperature Variation .....	40
8.0	CONCLUSION.....	42

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 2 of 42

## MEASUREMENT REPORT

### FCC Part 90

---

#### MIMO

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Measurement	Max. Power [W]	Max. Power [dBm]
2.4GHz - Transmitter	7 MHz	16QAM-BPSK	2455-2479	Conducted	0.296	24.71

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		Page 3 of 42

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.**

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 4 of 42

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Brinc LEMUR 2 Controller FCC ID: 2BHDHBR00004**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitter that operates under the provisions of Part 90.

**Test Device Serial No.: L2C-2404-00019**

### 2.2 Device Capabilities

This device contains the following capabilities:

2.4GHz – Transceiver (7MHz BW only, 16QAM-BPSK modulation)

Ch.	Frequency (MHz)
Low	2455
:	:
Mid	2467
:	:
High	2479

**Table 2-1. Frequency/Channel Operations**

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version 1.6.0 installed on the EUT.

### 2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.6 Antenna Description

The manufacturer is using an antenna from Taoglas (Model: GW.20.A151) with the following properties:

Antenna Type: Dipole antenna with RP-SMA(M) connector

Impedance: 50Ω

Peak Gain: 2dBi

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 5 of 42

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the "American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services" (ANSI C63.26-2015) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....**.....**None**

### 3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E \text{ [dB}\mu\text{V/m]} = \text{Measured amplitude level [dBm]} + 107 + \text{Cable Loss [dB]} + \text{Antenna Factor [dB/m]}$$

And

$$\text{EIRP [dBm]} = E \text{ [dB}\mu\text{V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 6 of 42

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 7 of 42



## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	ETS-001	EMC Cable and Switch System	11/15/2023	Annual	11/14/2024	ETS-001
-	ETS-001	EMC Cable and Switch System	11/15/2023	Annual	11/14/2024	ETS-001
-	LTx2	Licensed Transmitter Cable Set	11/15/2023	Annual	11/15/2024	LTx2
-	LTx3	Licensed Transmitter Cable Set	11/15/2023	Annual	11/15/2024	LTx3
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	6/7/2024	Biennial	6/7/2026	00125518
Keysight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Keysight Technologies	N9030A	50GHz PXA Signal Analyzer	4/23/2024	Annual	4/23/2025	US51350301
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/11/2023	Annual	9/11/2024	100348
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	8/30/2022	Biennial	8/30/2024	A051107

**Table 5-1. Test Equipment**

**Notes:**

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		Page 8 of 42

## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### QAM Modulation

**Emission Designator = 8M45W7D**

BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission

#### **Example: Middle Channel 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80) = 50.3 dBc.

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 9 of 42

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Brinc Drones, Inc  
 FCC ID: 2BHDHBR00004  
 FCC Classification: Licensed Non-Broadcast Station Transmitter (TNB)  
 Mode(s): 2.4GHz – Transceiver

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046(a), 90.205(o)	< 5 Watts	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h), 90.209	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions	2.1051, 90.210(b)	> 25 dB for any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth  >35 dB for any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth  43 + 10 log (P) dB for any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth	PASS	Sections 7.4, 7.5
	Frequency Stability	2.1055, 90.213	Frequency stability to be specified in the station authorization	PASS	Section 7.7
RADIATED	Radiated Spurious Emissions	2.1053, 90.210(b)	> 43 + 10 log10(P[Watts]) for all spurious emissions	PASS	Section 7.6

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v2.3.0.

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 10 of 42

## 7.2 Conducted Output Power Data

### Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

### Test Procedure Used


ANSI C63.26-2015 – Section 5.2  
ANSI C63.26-2015 – Section 6.4.3.2.3

### Test Settings

1. Span = 2 x OBW to 3 x OBW
2. RBW = 1% to 5% of OBW
3. VBW  $\geq$  3 x RBW
4. Detector = RMS
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

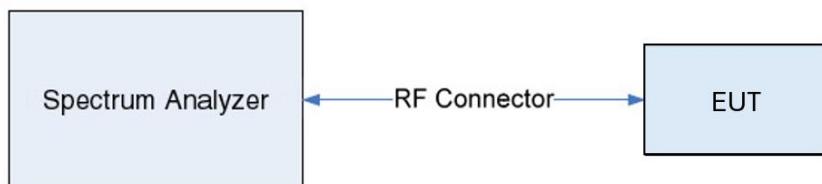


**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


1. The device was tested under 16QAM-BPSK modulation scheme and 7MHz channel bandwidth configurations.
2. Per the guidance of Section 6.4.3.2.3 of ANSI C63.26-2015, the output of each antenna is summed to determine the maximum MIMO power. This is accomplished by adding the output power of each antenna in linear terms (i.e. mW) and then determining the dBm value (e.g.  $10\log(P_{(mW)})$ ) of the summed powers.

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 11 of 42


Frequency [MHz]	BW [MHz]	Ant1 Cond. Power [dBm]	Ant2 Cond. Power [dBm]	MIMO Cond. Power [dBm]
2455	7.0	21.64	21.75	24.71
2467	7.0	21.46	21.68	24.58
2479	7.0	21.25	21.22	24.25

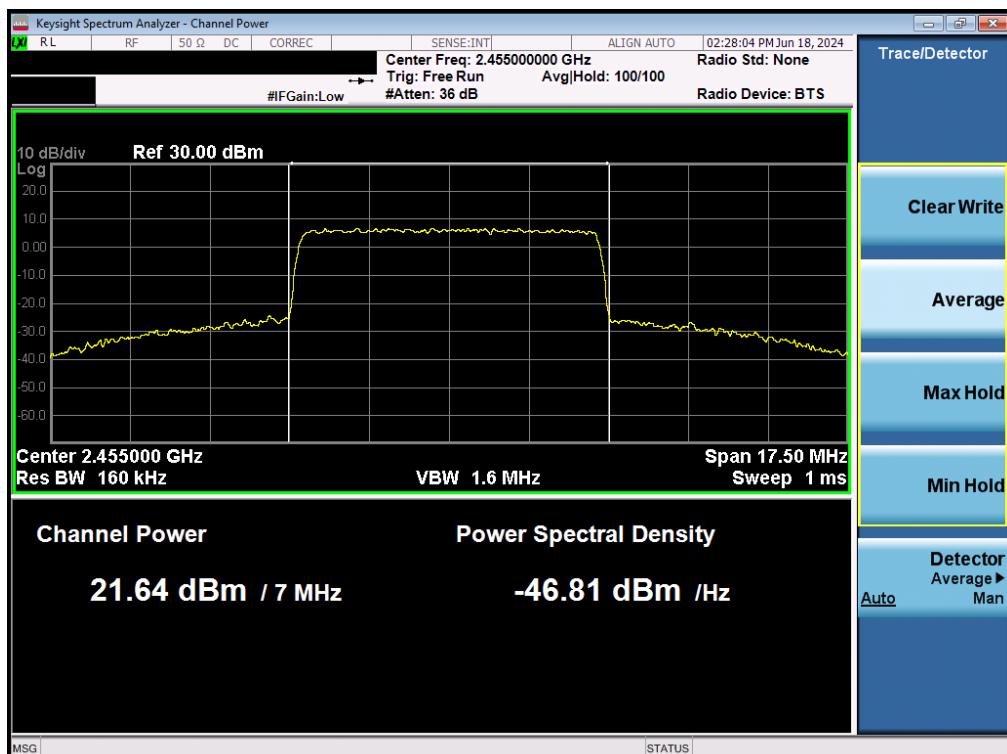**Table 7-2. Transceiver Conducted Power**

**Plot 7-1. Conducted Power Plot (2.4GHz – Low Channel - Full RB – MIMO Ant1)**

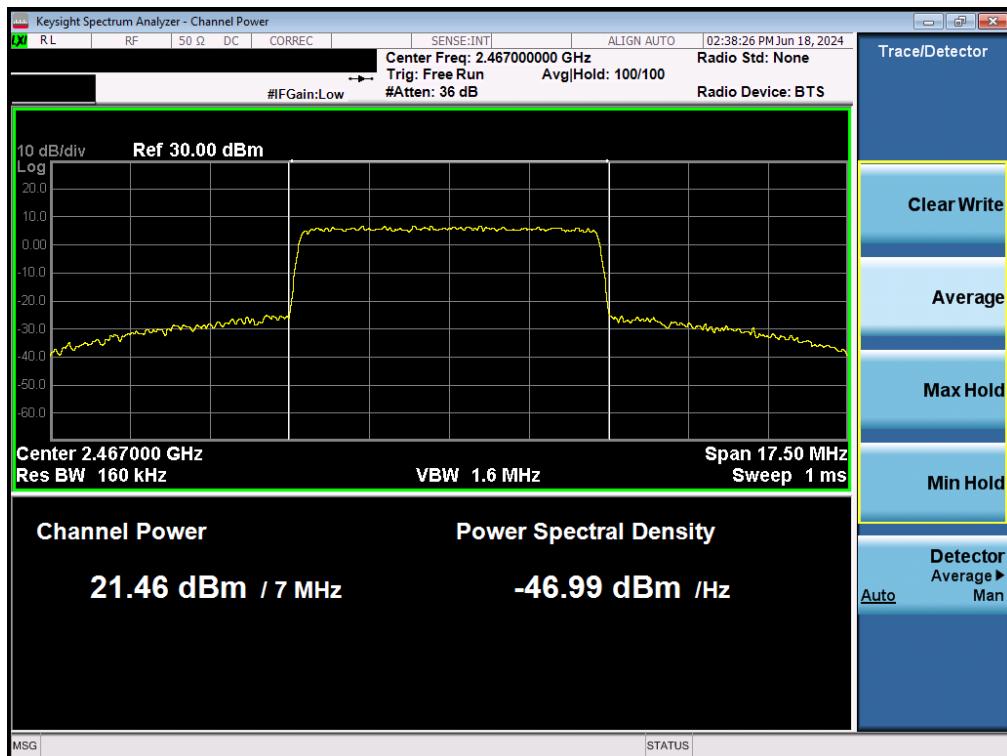FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		

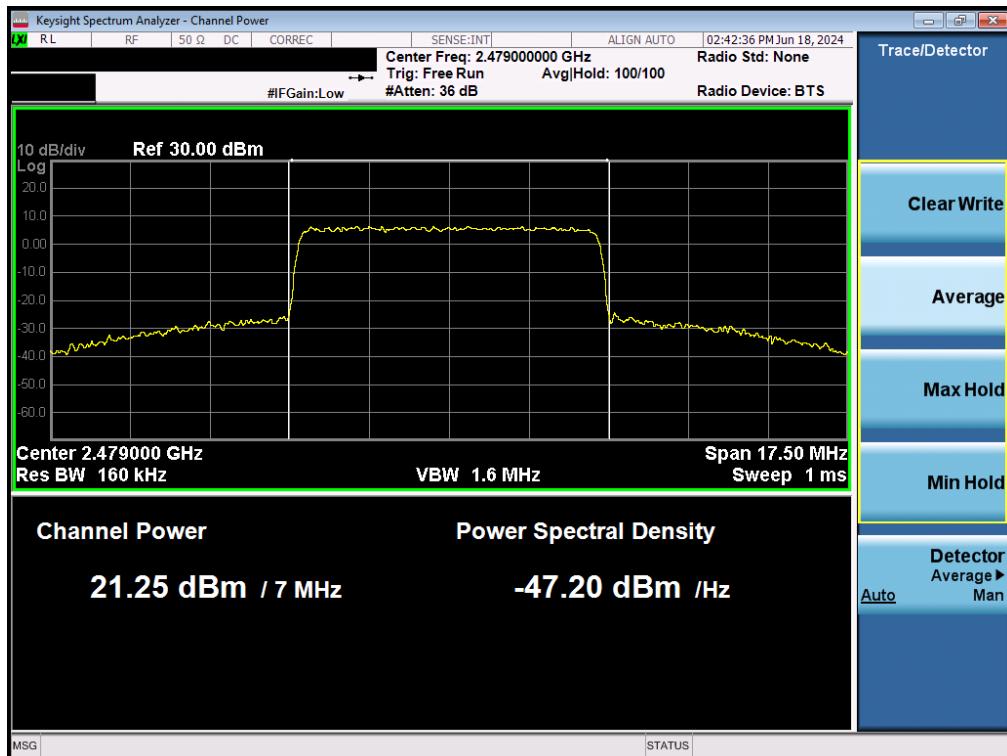


Plot 7-2. Conducted Power Plot (2.4GHz – Mid Channel - Full RB – MIMO Ant1)




Plot 7-3. Conducted Power Plot (2.4GHz – High Channel - Full RB – MIMO Ant1)

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 13 of 42

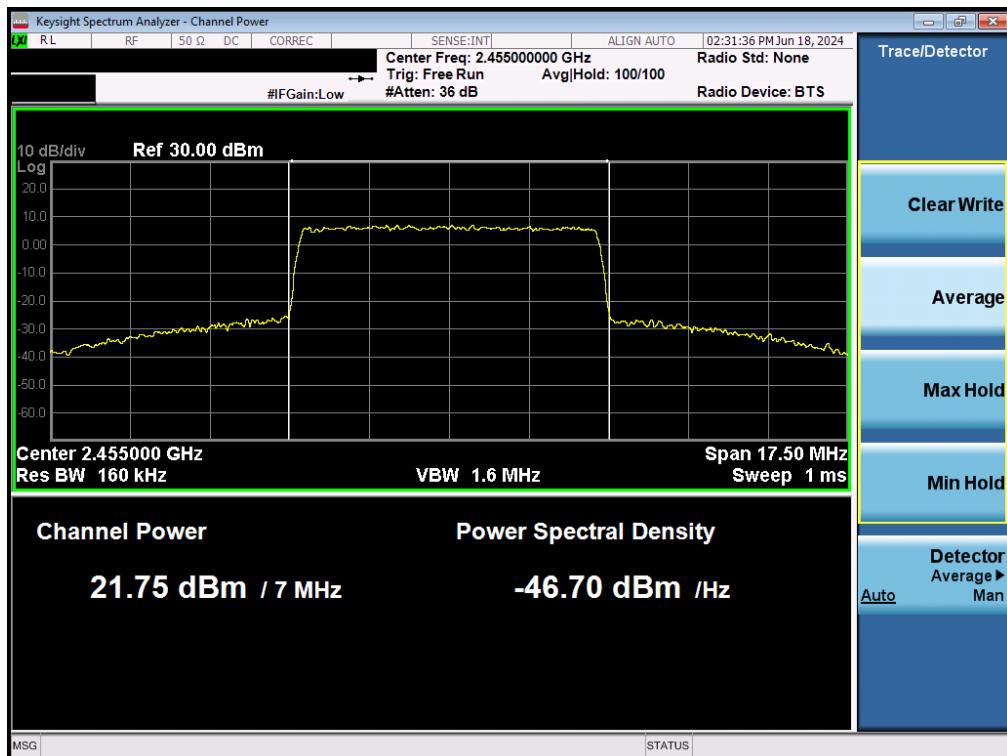


Plot 7-4. Conducted Power Plot (2.4GHz – Low Channel - Full RB – MIMO Ant2)

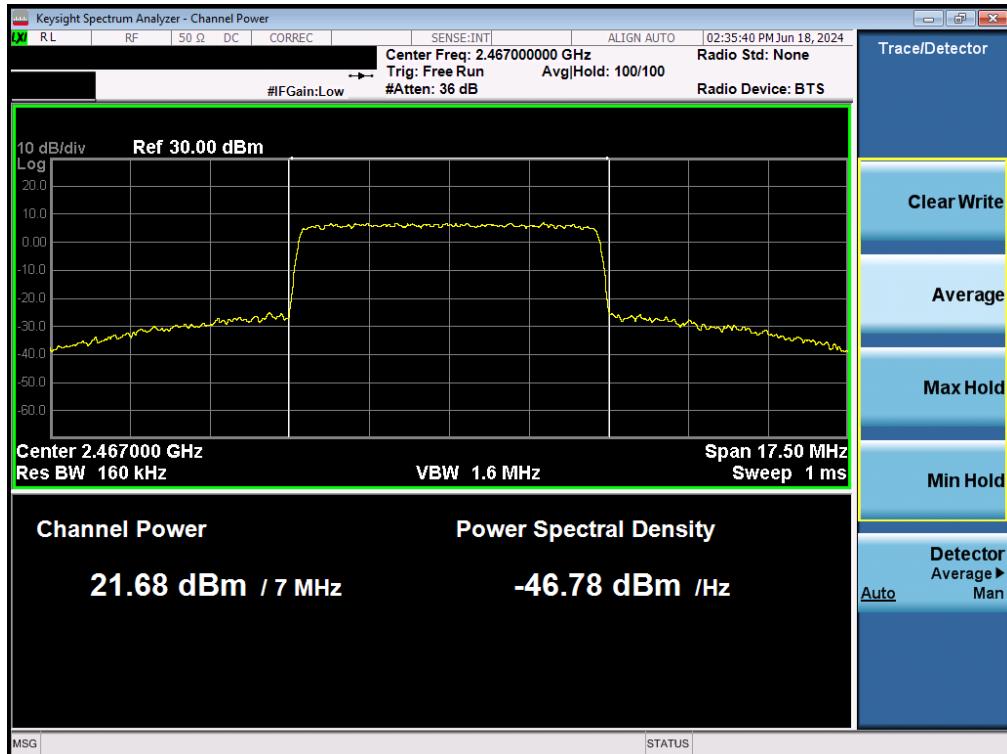

Plot 7-5. Conducted Power Plot (2.4GHz – Mid Channel - Full RB – MIMO Ant2)

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 14 of 42

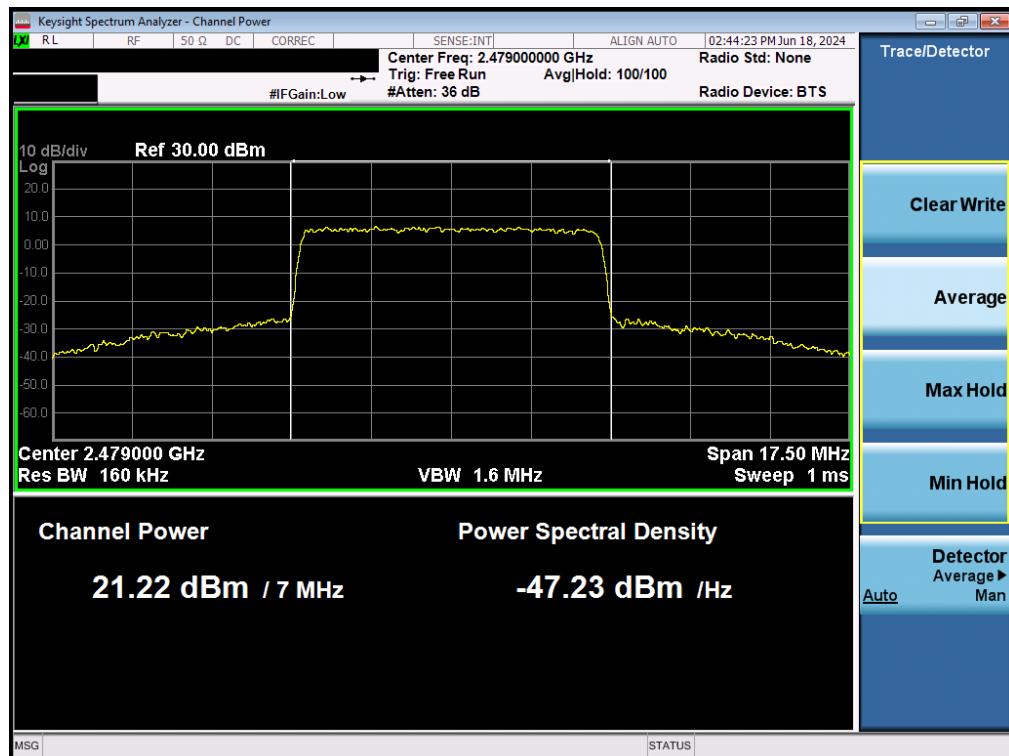

Plot 7-6. Conducted Power Plot (2.4GHz – High Channel - Full RB – MIMO Ant2)

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 15 of 42

## 7.3 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst-case configuration results are reported in this section.

### Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

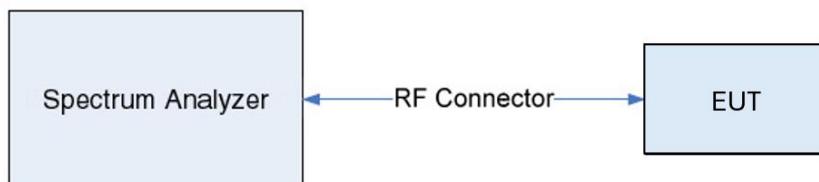


Figure 7-2. Test Instrument & Measurement Setup


### Test Notes

None

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 16 of 42



Plot 7-7. Occupied Bandwidth Plot (2.4GHz – Mid Channel - Full RB – MIMO Ant1)

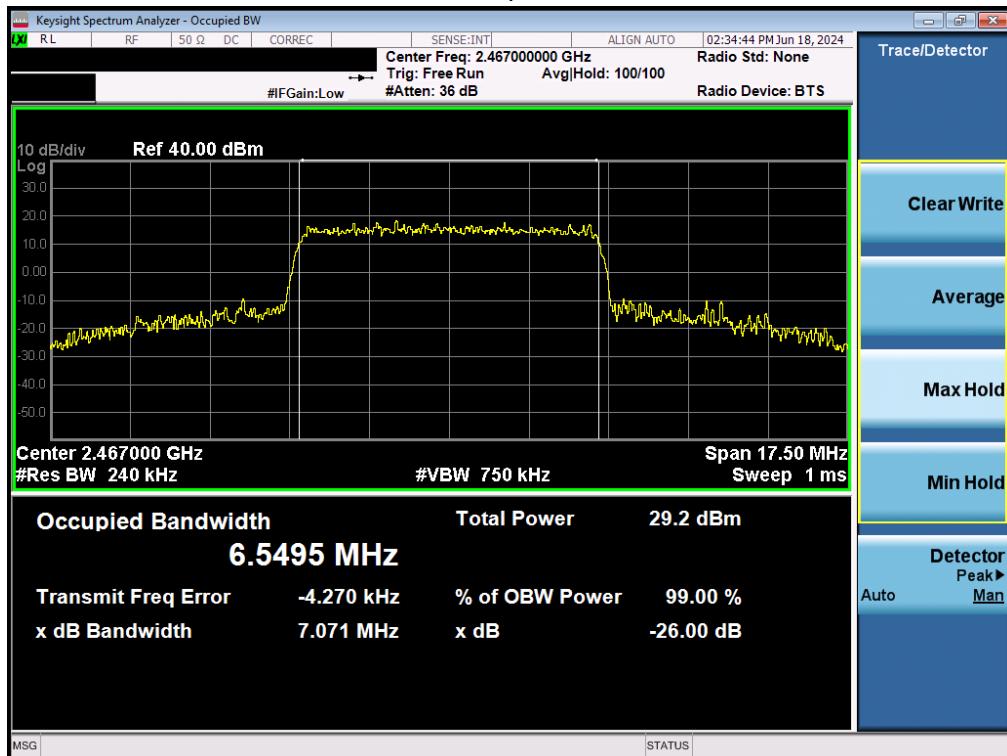

Plot 7-8. Occupied Bandwidth Plot (2.4GHz – Mid Channel - Full RB – MIMO Ant2)

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 17 of 42

## 7.4 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


ANSI C63.26-2015 – Section 5.7.4  
ANSI C63.26-2015 – Section 6.4.4.1(c)

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW  $\geq$  100kHz
3. VBW  $\geq$  3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


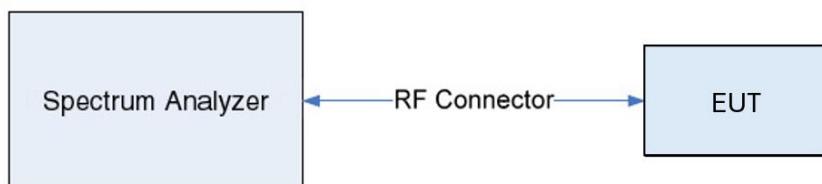


**Figure 7-3. Test Instrument & Measurement Setup**


### Test Notes

1. Per Part 90, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.
2. Per the guidance in Section 6.4.4.1(c) of ANSI C63.26, the spurious emissions levels found greater than 250% of the authorized bandwidth from the center frequency shall apply a 3dB increase to each individual antenna output to assess compliance.
3. Based on the plots provided in this section, none of the spurious emissions found when adding 3dB are over the -13dBm limit specified in this rule part.


FCC ID: 2BHDHBR00004		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		
1M2406100047-01.2BHDH	1/20/2024 - 6/19/2024	Controller	Page 18 of 42	

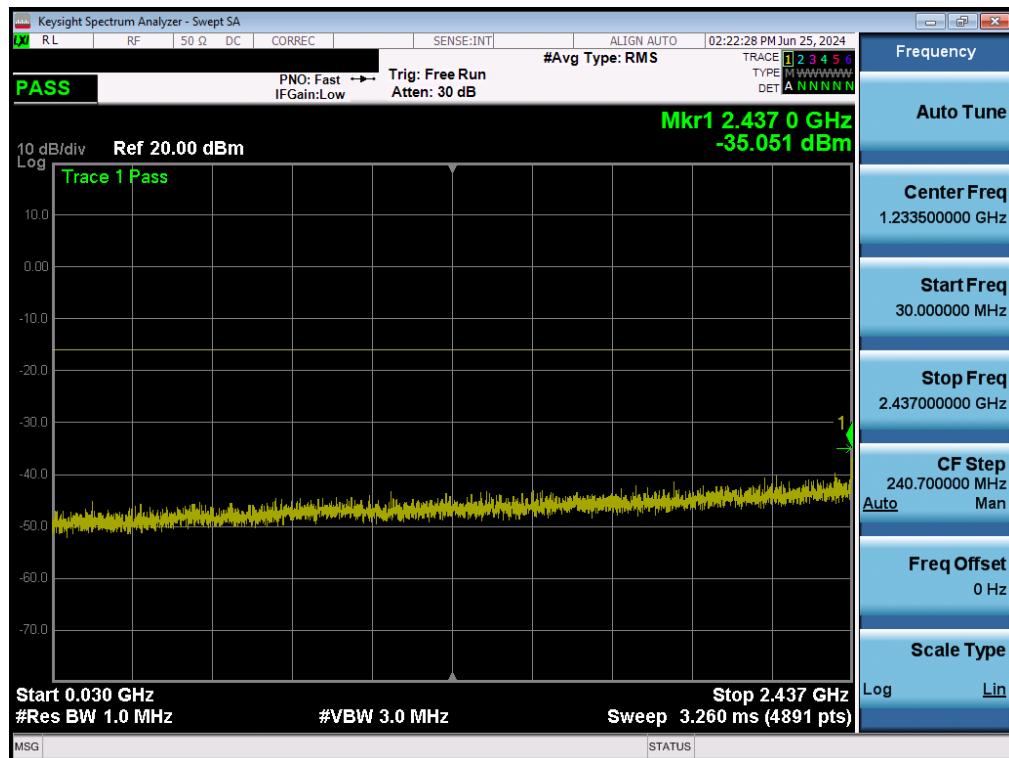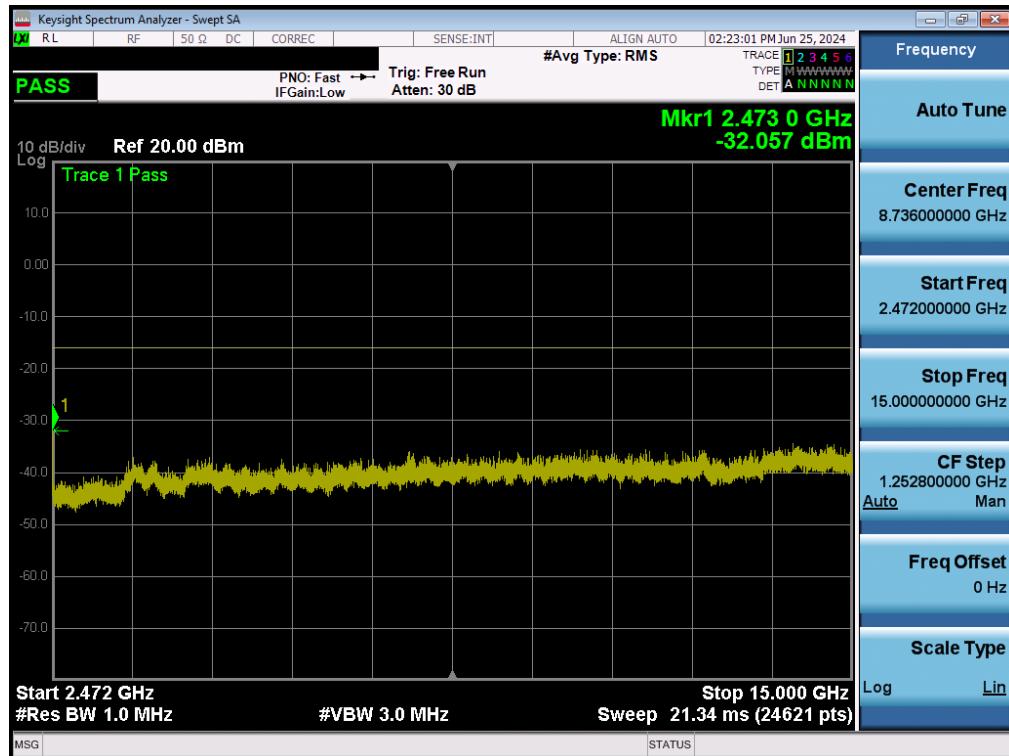**Antenna 1**

**Plot 7-9. Conducted Spurious Plot (2.4GHz – Low Channel – MIMO Ant1))**

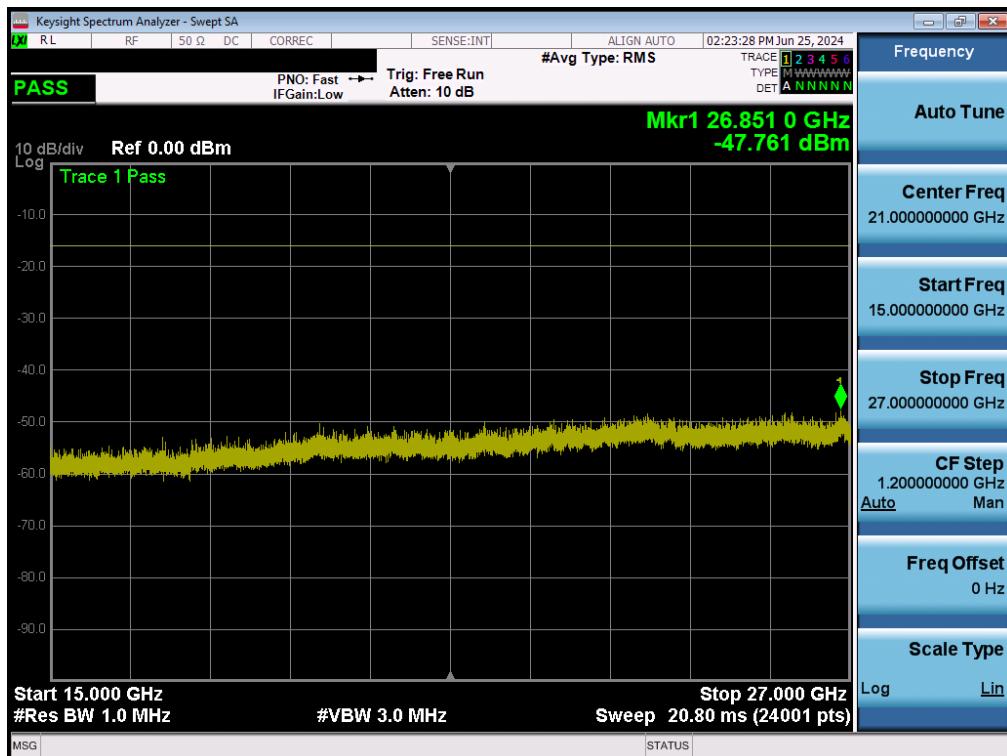**Plot 7-10. Conducted Spurious Plot (2.4GHz - Low Channel – MIMO Ant1))**

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		Page 19 of 42

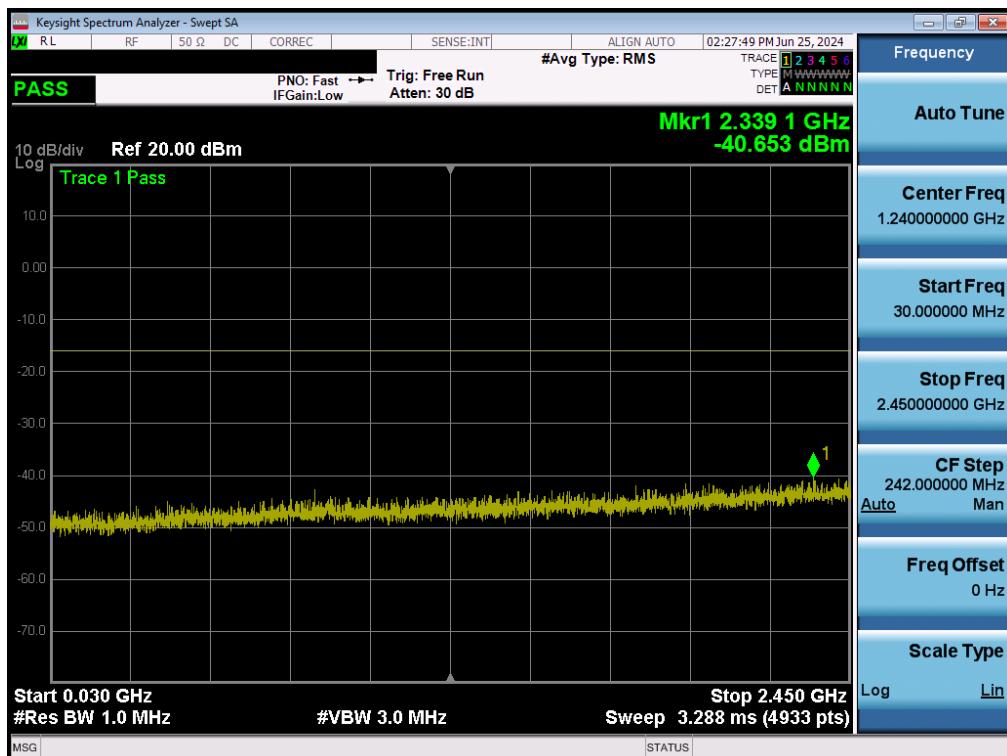


Plot 7-11. Conducted Spurious Plot (2.4GHz - Low Channel – MIMO Ant1))




Plot 7-12. Conducted Spurious Plot (2.4GHz - Mid Channel – MIMO Ant1))

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		Page 20 of 42

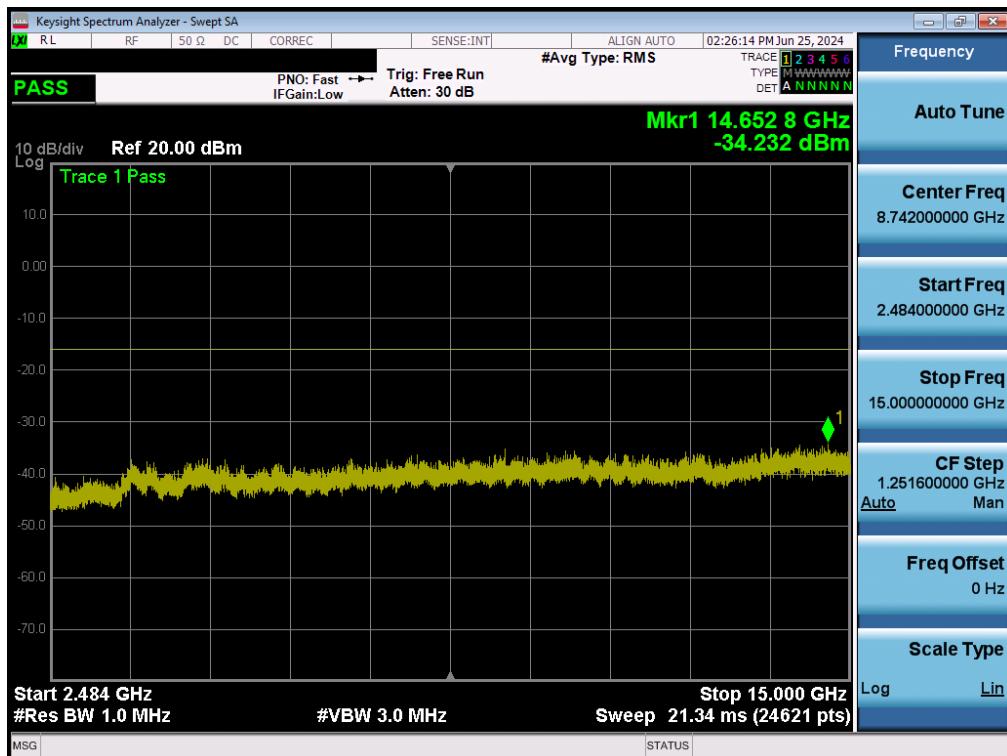


Plot 7-13. Conducted Spurious Plot (2.4GHz - Mid Channel – MIMO Ant1))

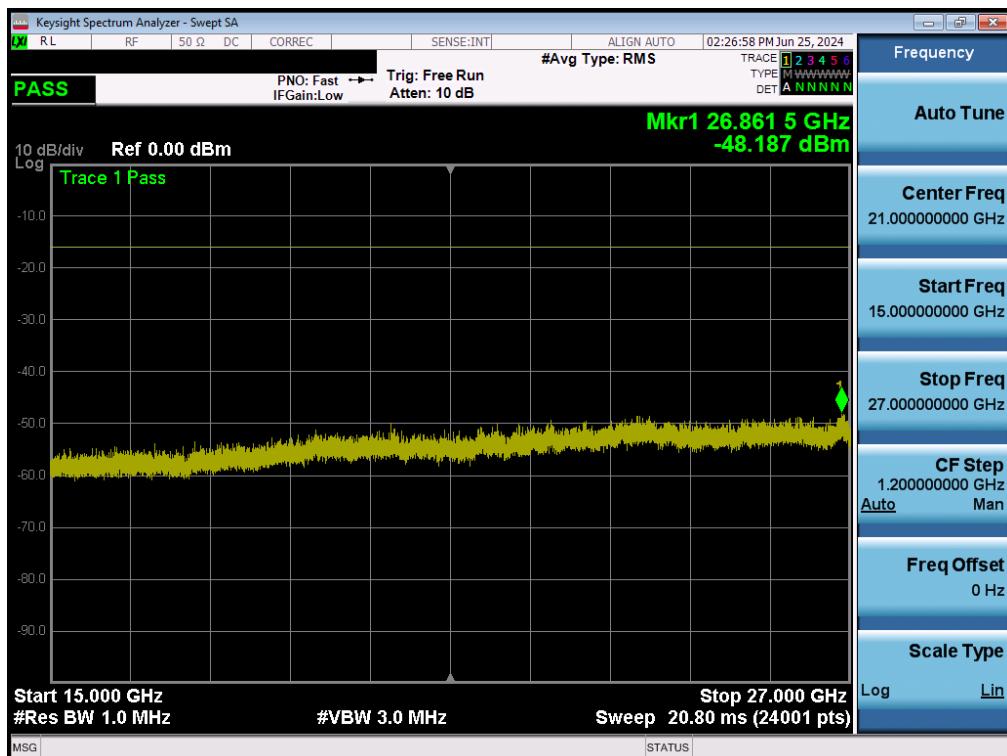


Plot 7-14. Conducted Spurious Plot (2.4GHz - Mid Channel – MIMO Ant1))

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		Page 21 of 42

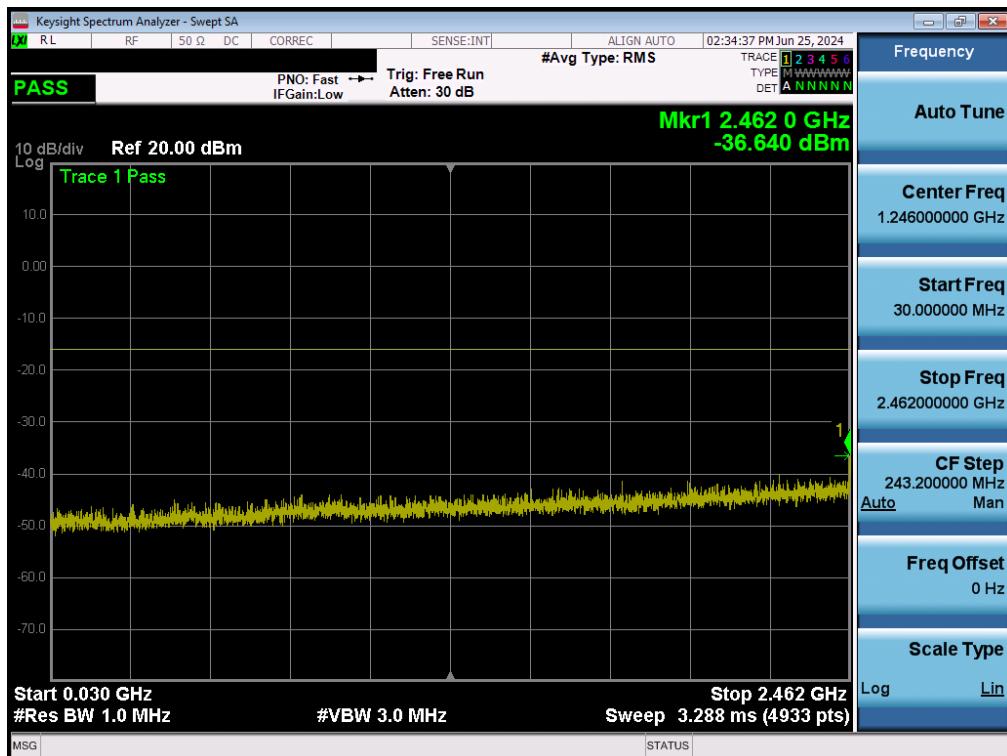


Plot 7-15. Conducted Spurious Plot (2.4GHz - High Channel – MIMO Ant1))

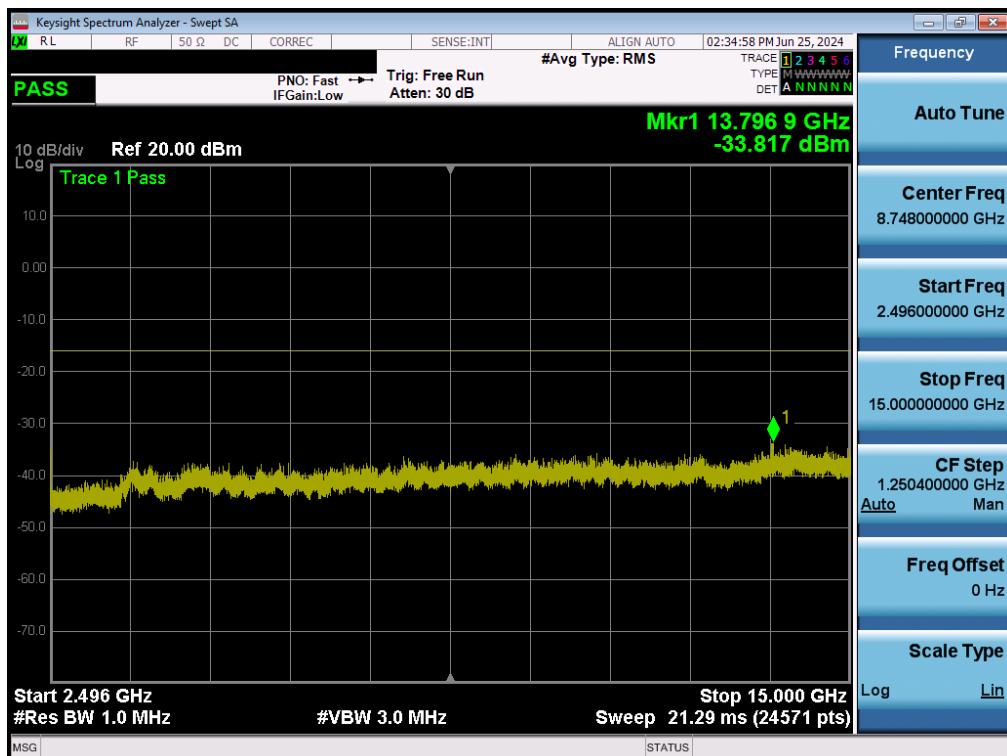



Plot 7-16. Conducted Spurious Plot (2.4GHz - High Channel – MIMO Ant1))

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 22 of 42

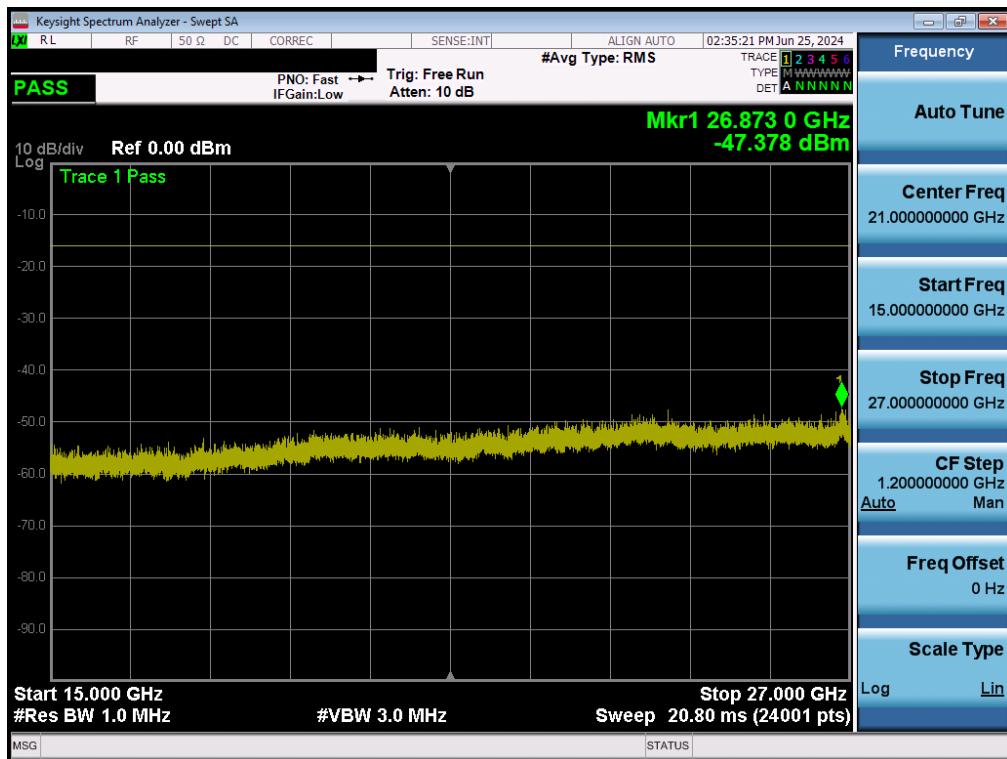


Plot 7-17. Conducted Spurious Plot (2.4GHz - High Channel – MIMO Ant1))


FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 23 of 42

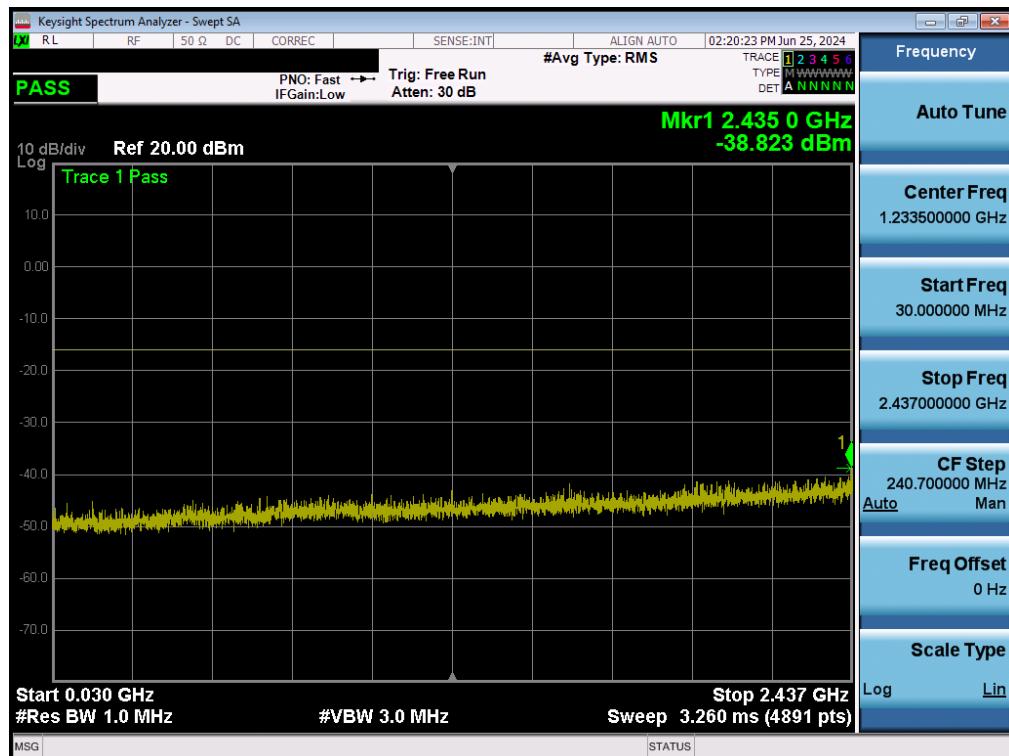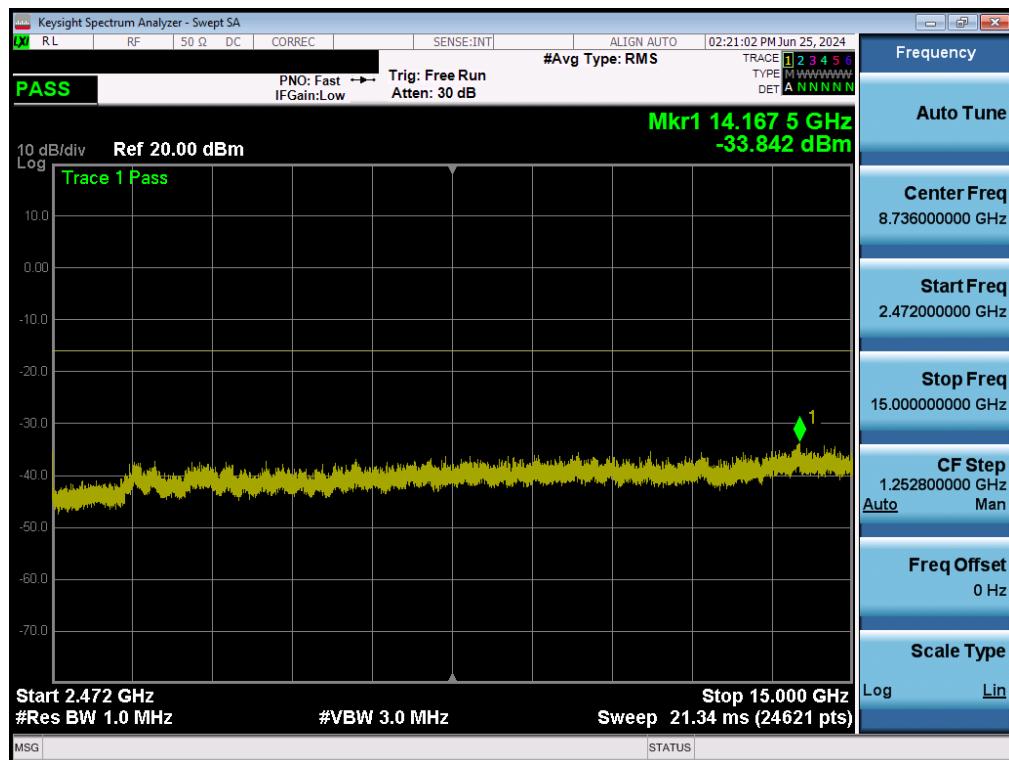**Antenna 2**

**Plot 7-18. Conducted Spurious Plot (2.4GHz - Low Channel – MIMO Ant2))**

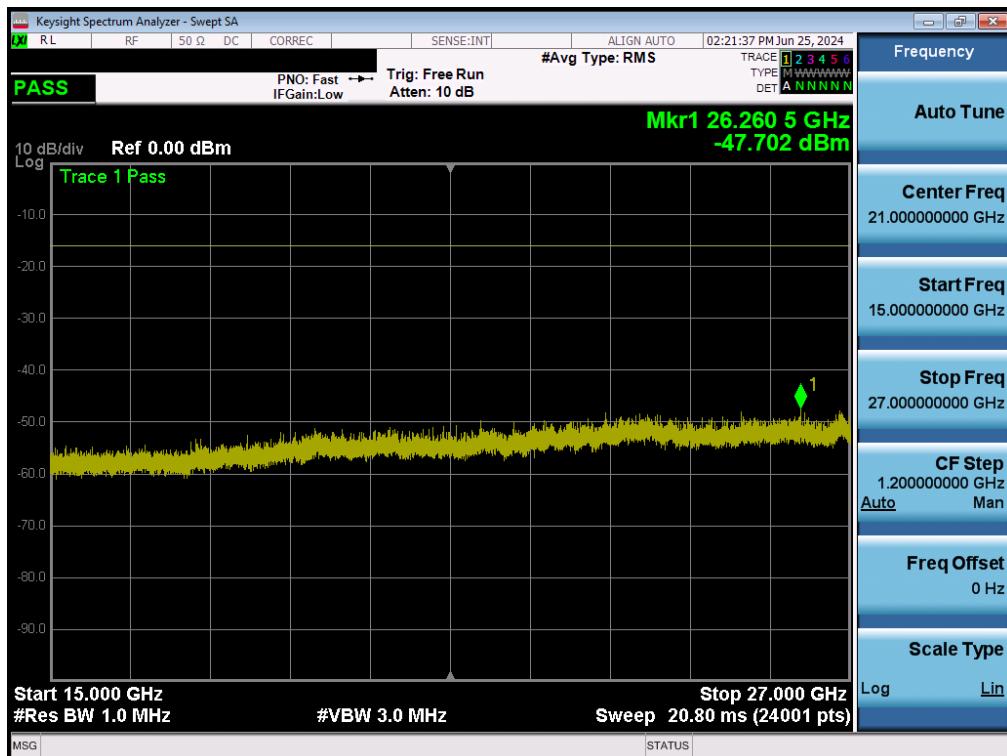**Plot 7-19. Conducted Spurious Plot (2.4GHz - Low Channel – MIMO Ant2))**

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		Page 24 of 42

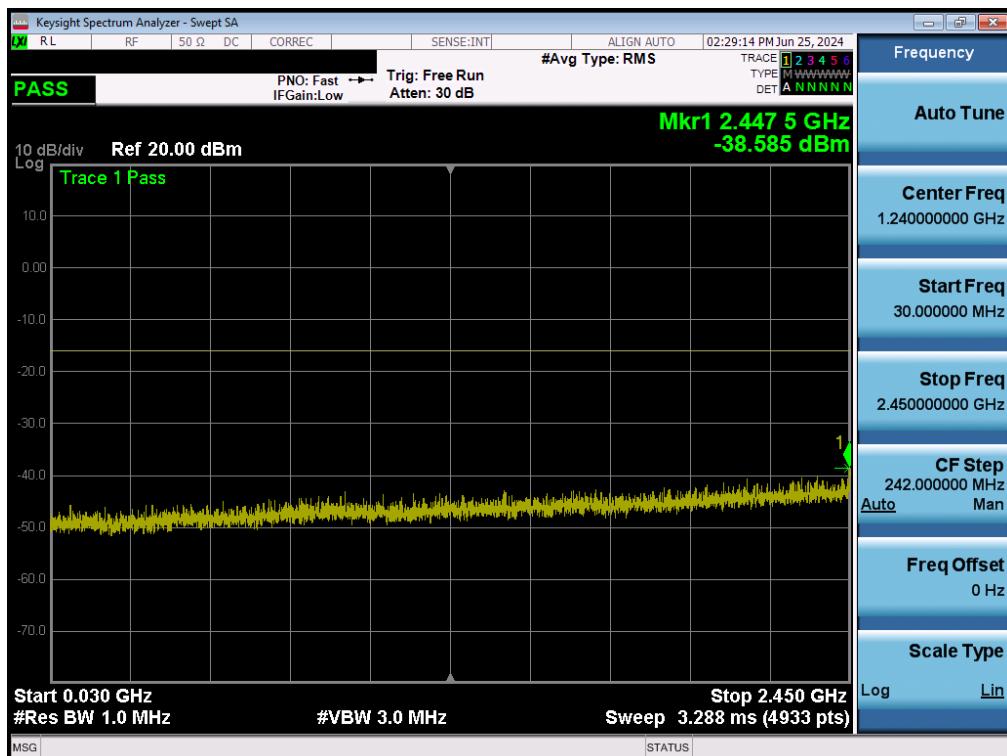


Plot 7-20. Conducted Spurious Plot (2.4GHz - Low Channel – MIMO Ant2))




Plot 7-21. Conducted Spurious Plot (2.4GHz - Mid Channel – MIMO Ant2))

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		Page 25 of 42

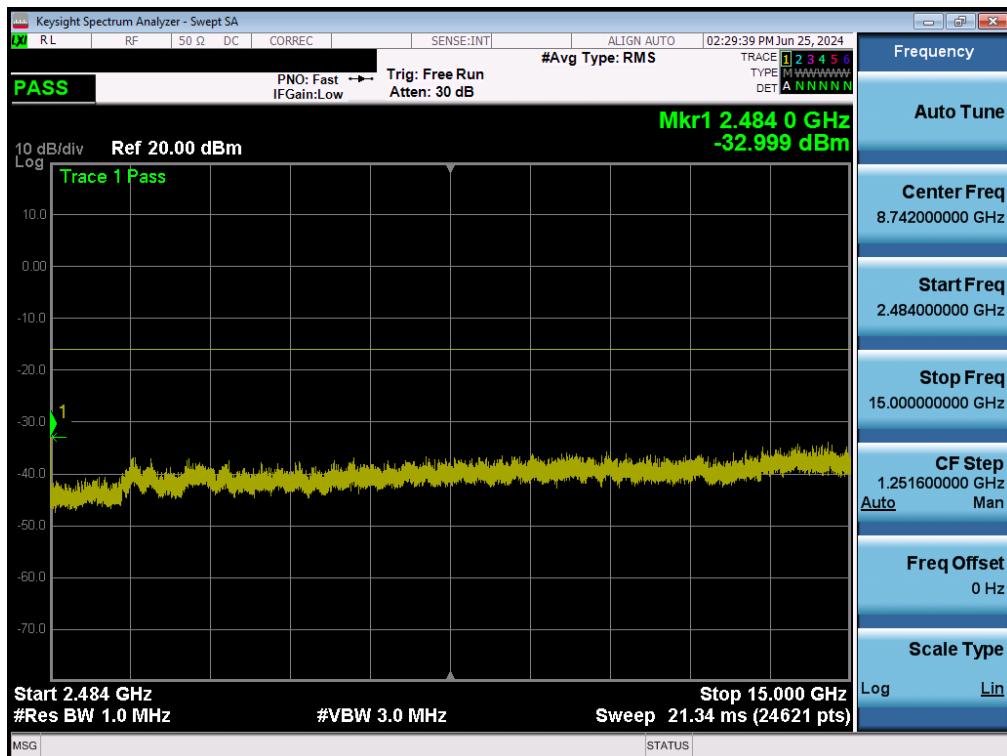


Plot 7-22. Conducted Spurious Plot (2.4GHz - Mid Channel – MIMO Ant2))

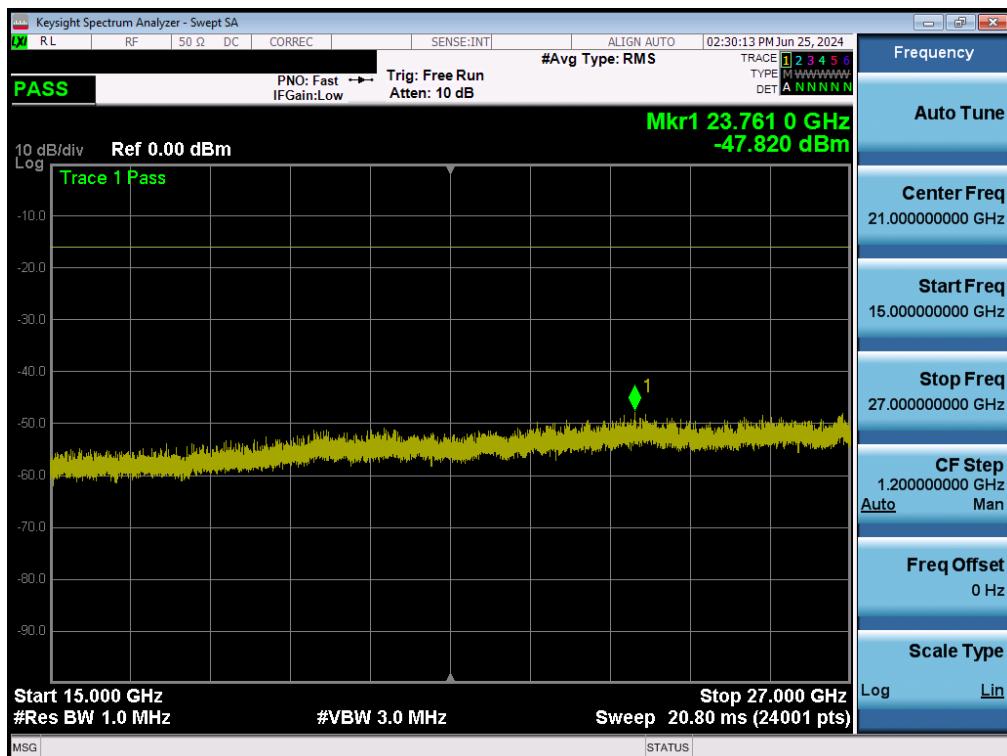


Plot 7-23. Conducted Spurious Plot (2.4GHz - Mid Channel – MIMO Ant2))

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 26 of 42

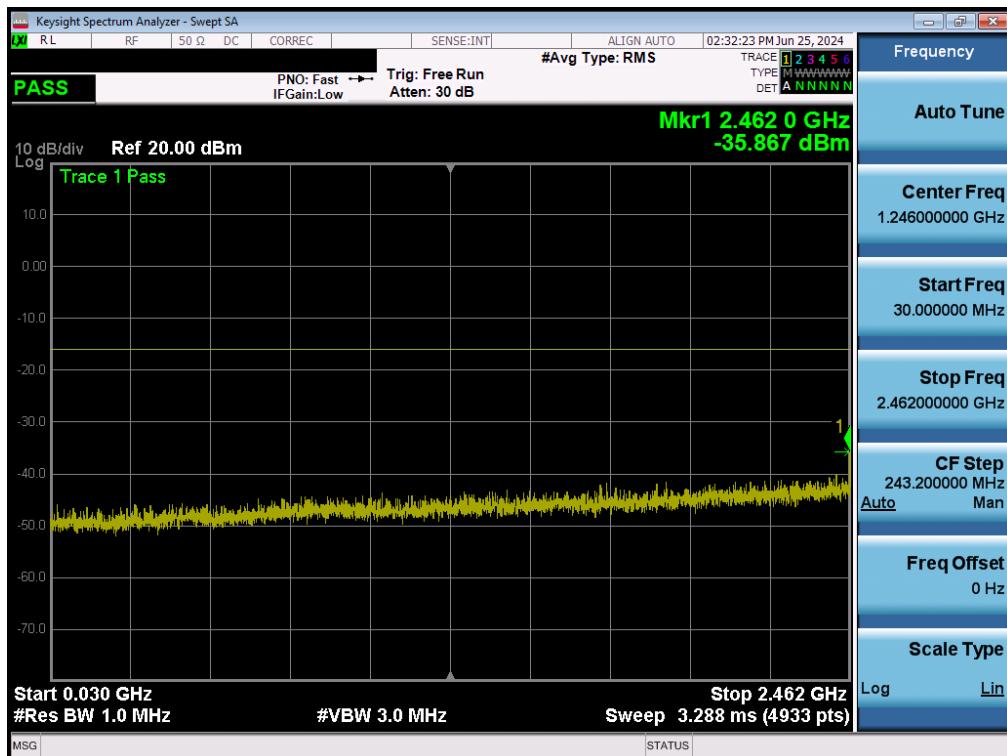


Plot 7-24. Conducted Spurious Plot (2.4GHz - High Channel – MIMO Ant2))

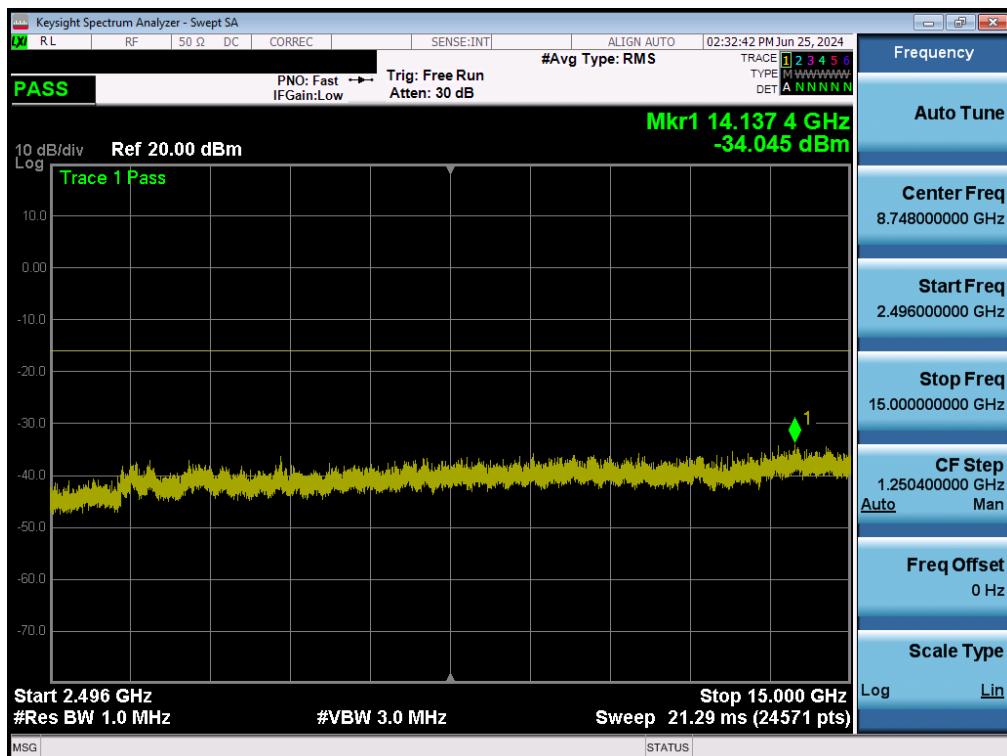

Plot 7-25. Conducted Spurious Plot (2.4GHz - High Channel – MIMO Ant2))

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 27 of 42

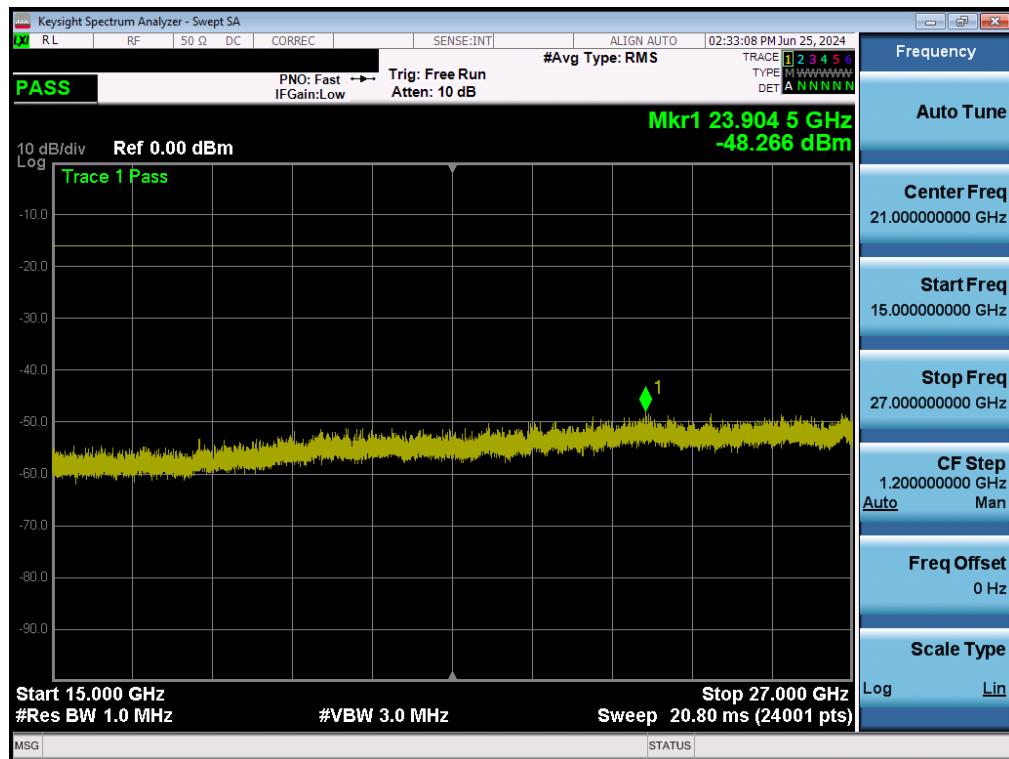

Plot 7-26. Conducted Spurious Plot (2.4GHz - High Channel – MIMO Ant2))

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 28 of 42

## 7.5 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

***The minimum permissible attenuation for this device is defined by Emission Mask B in Part 90.210(b).***

### Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

### Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 75 kHz
3. VBW = 240 kHz
4. Detector = RMS
5. Trace mode = Max Hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





**Figure 7-4. Test Instrument & Measurement Setup**


### Test Notes

For band edge emissions removed by < 250% of the authorized bandwidth from the center frequency, there are no MIMO considerations since the emission mask is treated as a relative emission limit when applied to each individual output.

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 29 of 42

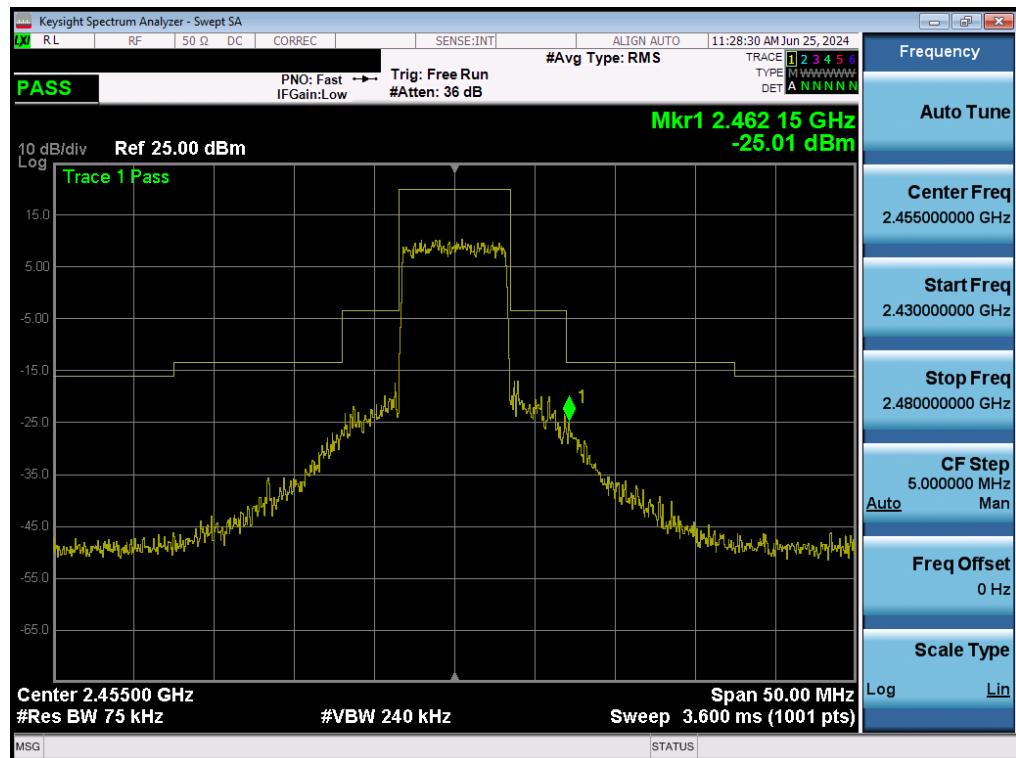
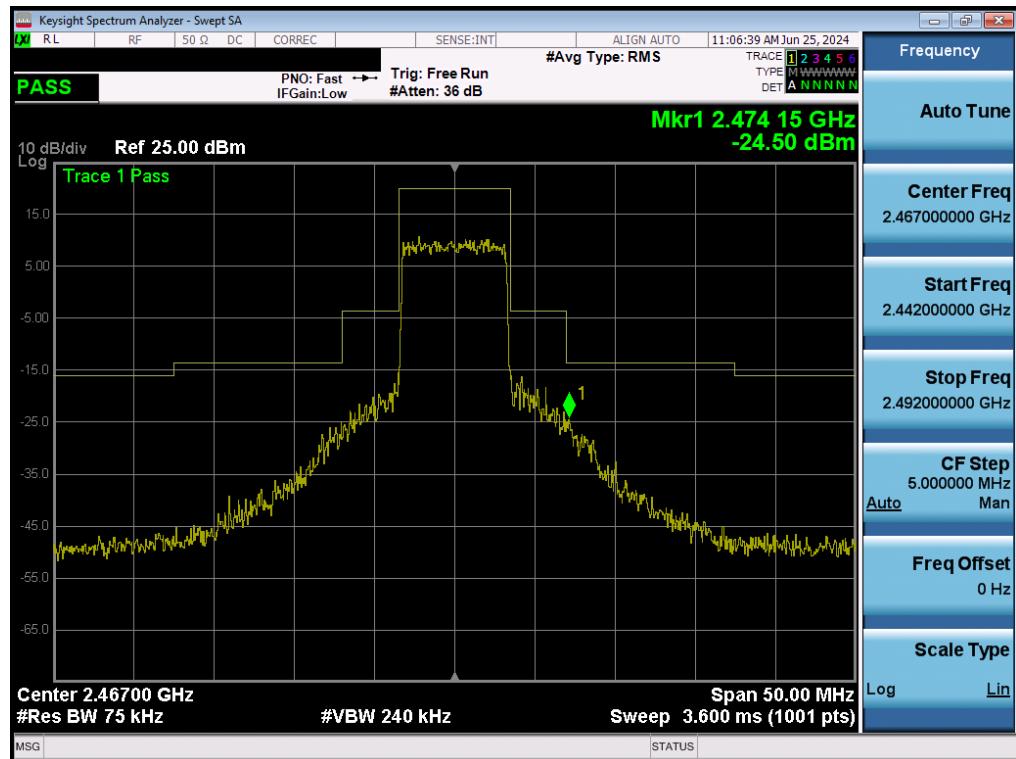
**Antenna 1**

**Plot 7-27. Transmitter Mask (2.4GHz - Low Channel – MIMO Ant1)**

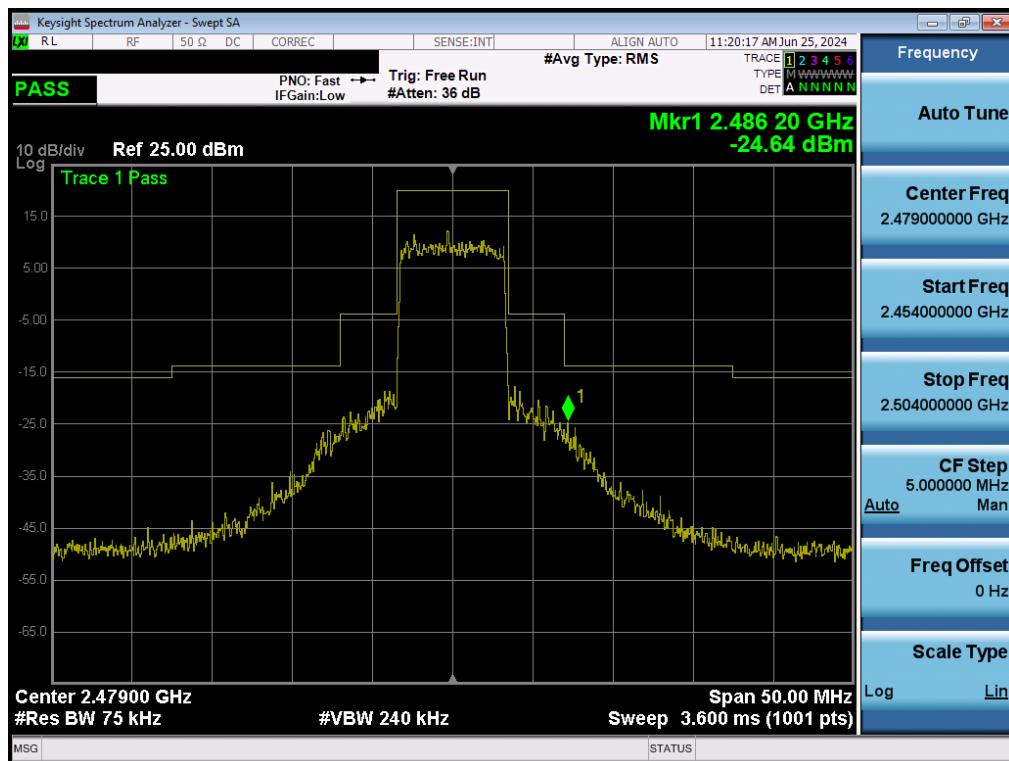**Plot 7-28. Transmitter Mask (2.4GHz - Mid Channel – MIMO Ant1)**

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		Page 30 of 42

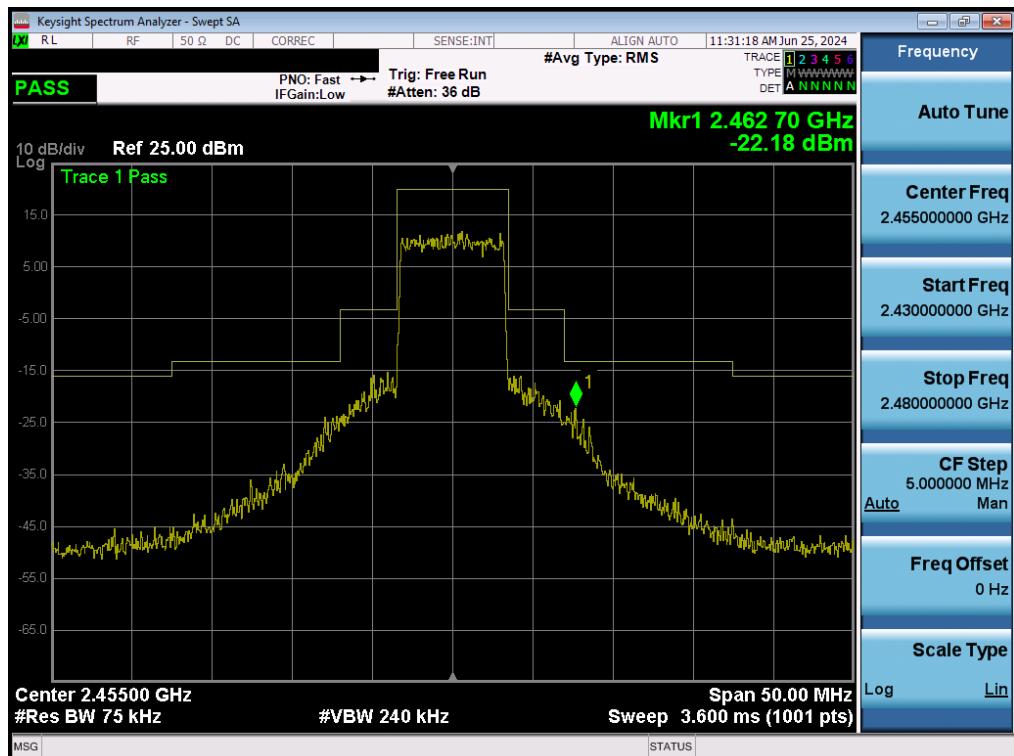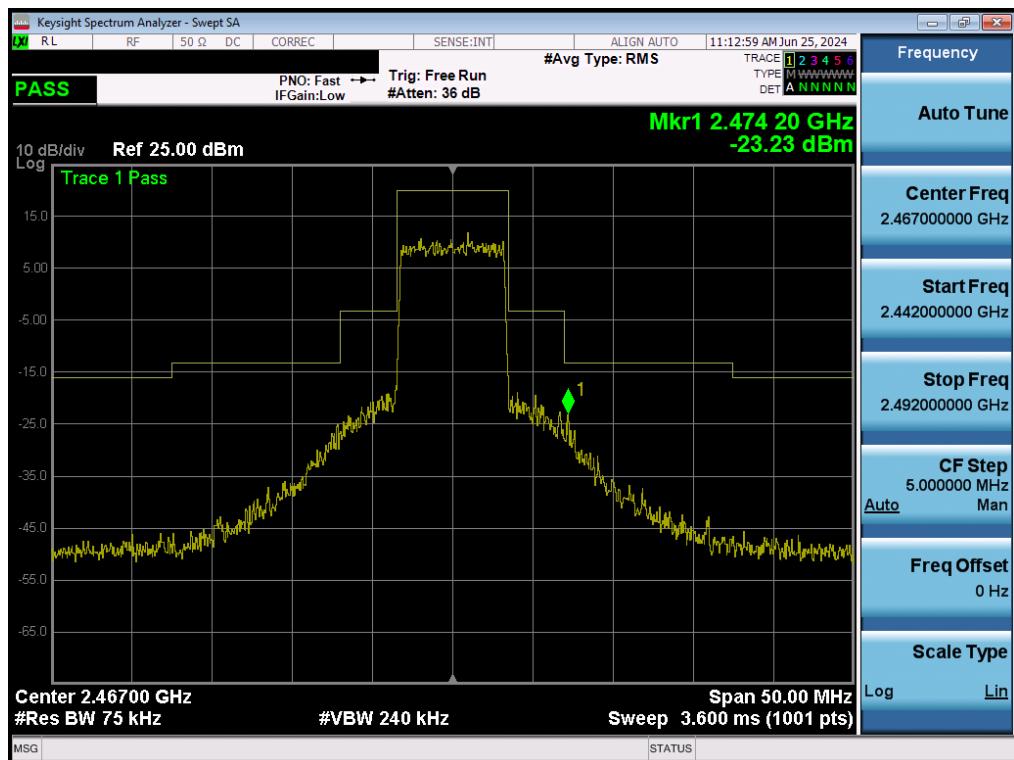


Plot 7-29. Transmitter Mask (2.4GHz - High Channel – MIMO Ant1)

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 31 of 42

**Antenna 2**

**Plot 7-30. Transmitter Mask (2.4GHz - Low Channel – MIMO Ant2)**

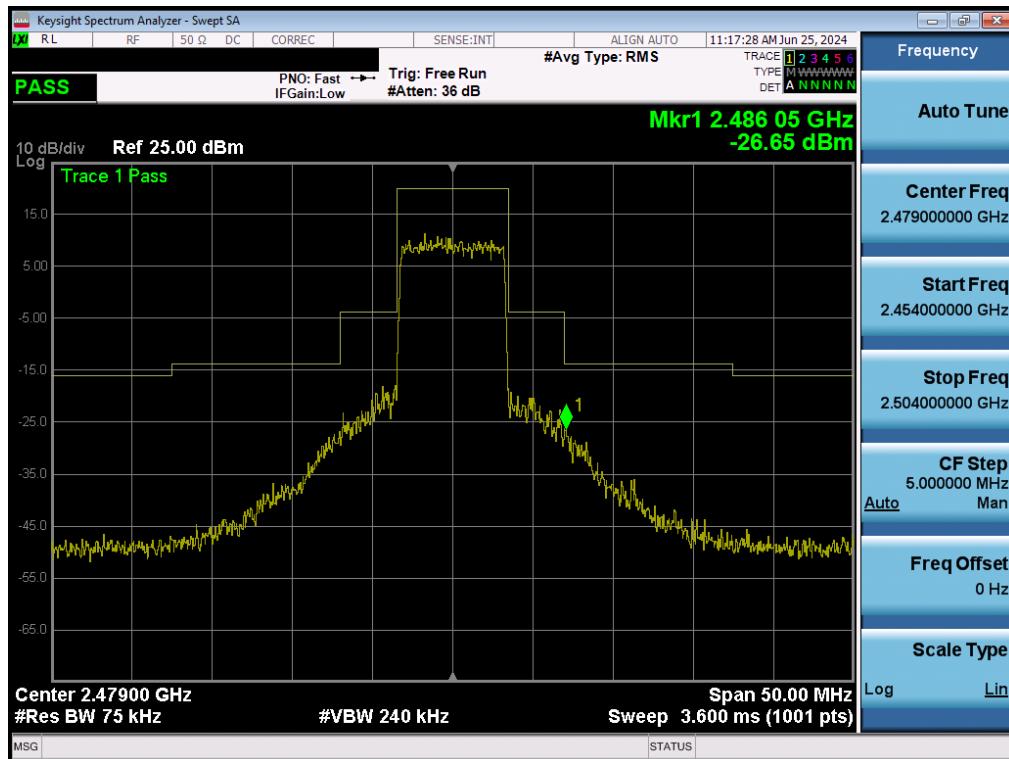**Plot 7-31. Transmitter Mask (2.4GHz - Mid Channel – MIMO Ant2)**

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		Page 32 of 42



Plot 7-32. Transmitter Mask (2.4GHz - High Channel – MIMO Ant2)

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 33 of 42

## 7.6 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an external antenna as described in Section 2.6 of this report. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4


### Test Settings

1. RBW = 1MHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 34 of 42

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

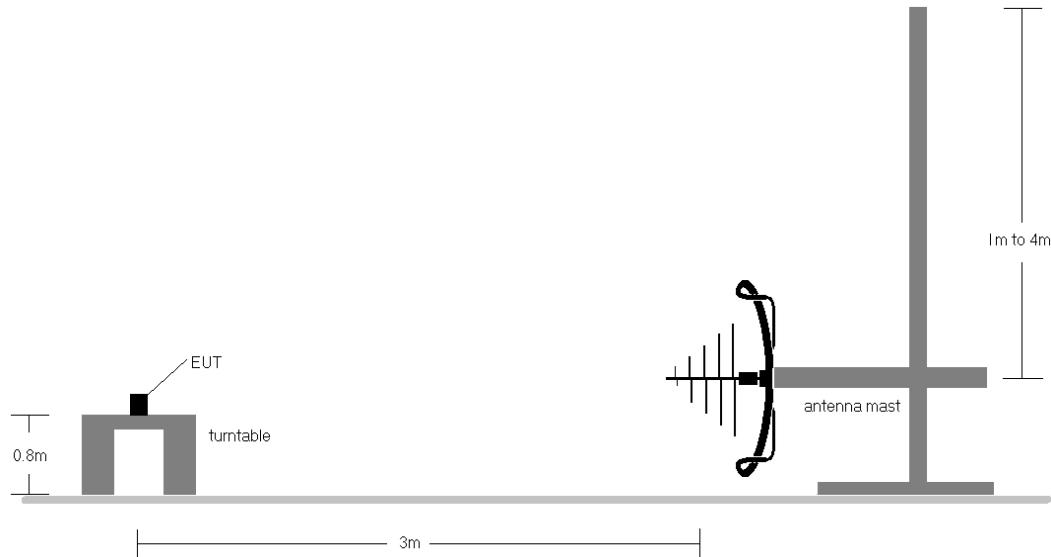

**Figure 7-5. Test Instrument & Measurement Setup < 1GHz**

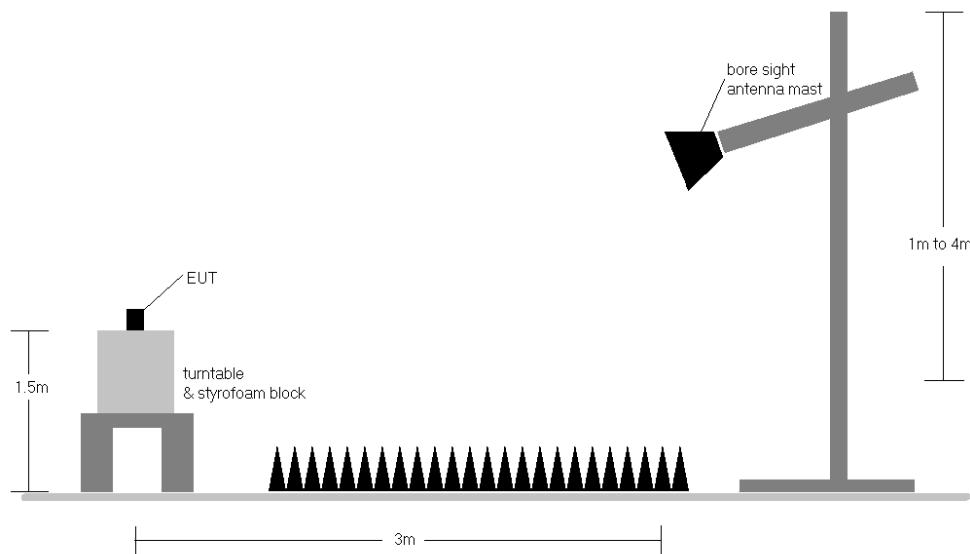

**Figure 7-6. Test Instrument & Measurement Setup >1 GHz**


FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 35 of 42

**Test Notes**

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
  - a)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 36 of 42

### Radiated Spurious Emissions (<1GHz)

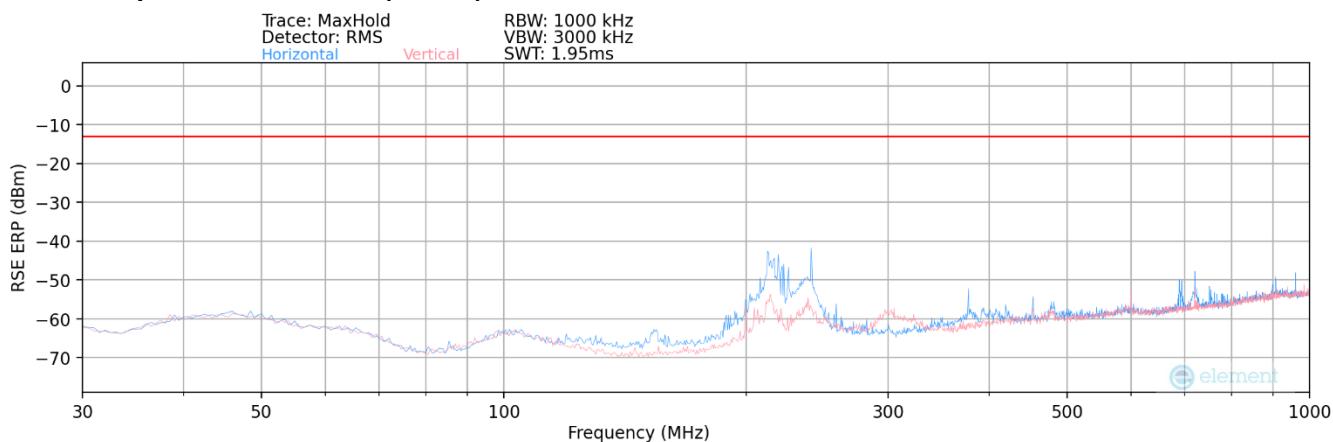

Plot 7-33. Radiated Spurious Plot Above 1GHz (2.4GHz)


Technology	COFDM
Bandwidth (MHz):	7
Frequency (MHz):	2479
Modulation Signal:	16QAM-BPSK
Detector / Trace Mode:	RMS / Max Hold
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
214.10	H	361	103	-46.75	-13.61	46.64	-50.77	-13.00	-37.77
378.09	H	157	136	-57.24	-9.11	40.65	-56.76	-13.00	-43.76
725.87	H	128	321	-58.14	-3.22	45.64	-51.77	-13.00	-38.77
893.06	H	-	-	-59.89	-0.85	46.26	-51.14	-13.00	-38.14
905.59	H	-	-	-60.12	-0.68	46.20	-51.20	-13.00	-38.20
913.24	H	-	-	-61.00	-0.52	45.48	-51.92	-13.00	-38.92


Table 7-3. Radiated Spurious Data Below 1GHz (2.4GHz – High Channel)

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller		

### Radiated Spurious Emissions (>1GHz)

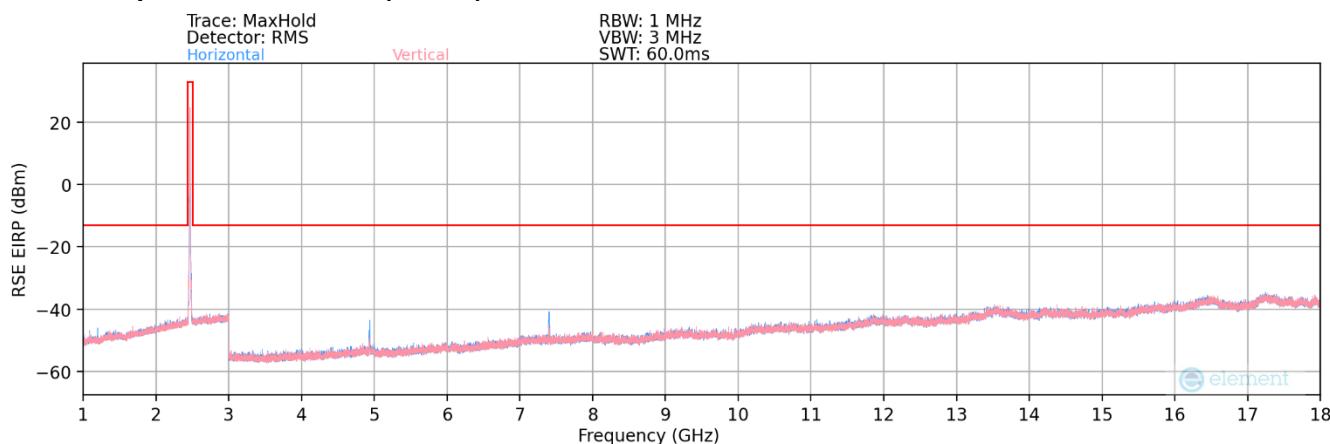

Plot 7-34. Radiated Spurious Plot Below 1GHz (2.4GHz)

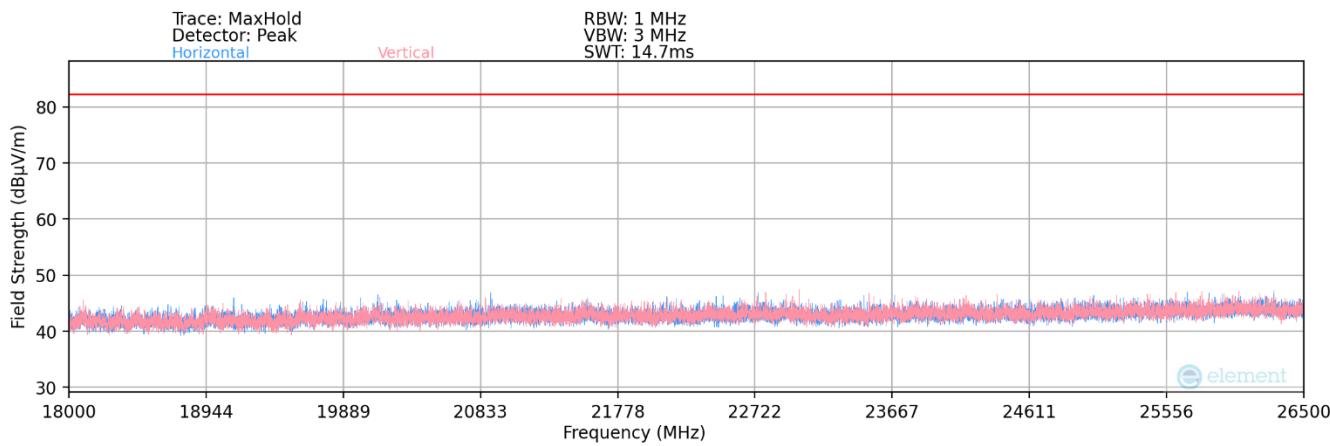

Plot 7-35. Radiated Spurious Plot Below 1GHz (2.4GHz)

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 38 of 42

Technology	COFDM
Bandwidth (MHz):	7
Frequency (MHz):	2455
Modulation Signal:	16QAM-BPSK
Detector / Trace Mode:	RMS / Max Hold
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4910.00	H	171	317	-65.29	9.42	51.13	-44.13	-13.00	-31.13
7365.00	H	192	25	-68.42	15.62	54.20	-41.06	-13.00	-28.06
9820.00	H	123	22	-74.91	18.73	50.82	-44.44	-13.00	-31.44
12275.00	H	-	-	-80.60	23.00	49.40	-45.86	-13.00	-32.86
14730.00	H	-	-	-80.00	26.71	53.71	-41.55	-13.00	-28.55
17185.00	H	-	-	-79.82	29.24	56.42	-38.84	-13.00	-25.84

**Table 7-4. Radiated Spurious Data (2.4GHz – Low Channel)**

Technology	COFDM
Bandwidth (MHz):	7
Frequency (MHz):	2467
Modulation Signal:	16QAM-BPSK
Detector / Trace Mode:	RMS / Max Hold
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4934.00	H	150	317	-62.44	9.85	54.41	-40.85	-13.00	-27.85
7401.00	H	186	78	-67.29	14.98	54.69	-40.57	-13.00	-27.57
9868.00	H	192	227	-76.02	18.26	49.24	-46.02	-13.00	-33.02
12335.00	H	-	-	-78.32	22.76	51.44	-43.82	-13.00	-30.82
14802.00	H	-	-	-78.19	26.03	54.84	-40.42	-13.00	-27.42
17269.00	H	-	-	-76.43	29.15	59.72	-35.54	-13.00	-22.54

**Table 7-5. Radiated Spurious Data (2.4GHz – Mid Channel)**

Technology	COFDM
Bandwidth (MHz):	7
Frequency (MHz):	2479
Modulation Signal:	16QAM-BPSK
Detector / Trace Mode:	RMS / Max Hold
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4958.00	H	200	312	-63.27	10.32	54.05	-41.21	-13.00	-28.21
7437.00	H	191	25	-66.03	15.28	56.25	-39.01	-13.00	-26.01
9916.00	H	129	21	-74.72	18.49	50.77	-44.49	-13.00	-31.49
12395.00	H	-	-	-75.58	22.56	53.98	-41.28	-13.00	-28.28
14874.00	H	-	-	-76.63	26.51	56.88	-38.38	-13.00	-25.38
17353.00	H	-	-	-76.10	29.90	60.80	-34.46	-13.00	-21.46

**Table 7-6. Radiated Spurious Data (2.4GHz – High Channel)**

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)						Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller					Page 39 of 42

## 7.7 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5 \text{ ppm}$ ) of the center frequency.***

### Test Procedure Used

ANSI C63.26-2015 – Section 5.6

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None


FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 40 of 42

## 2.4GHz

Operating Frequency (Hz):	2,467,000,000
Ref. Voltage (VDC):	12.6

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	12.6	- 30	2,466,985,355	-5,316	-0.0002155
		- 20	2,466,986,301	-4,370	-0.0001771
		- 10	2,466,985,348	-5,322	-0.0002157
		0	2,466,993,439	2,769	0.0001122
		+ 10	2,466,987,579	-3,091	-0.0001253
		+ 20 (Ref)	2,466,990,671	0	0.0000000
		+ 30	2,466,994,466	3,796	0.0001539
		+ 40	2,466,995,263	4,593	0.0001862
		+ 50	2,466,995,553	4,882	0.0001979
Battery Endpoint	8.4	+ 20	2,466,992,562	1,892	0.0000767

Table 7-7. Frequency Stability Data

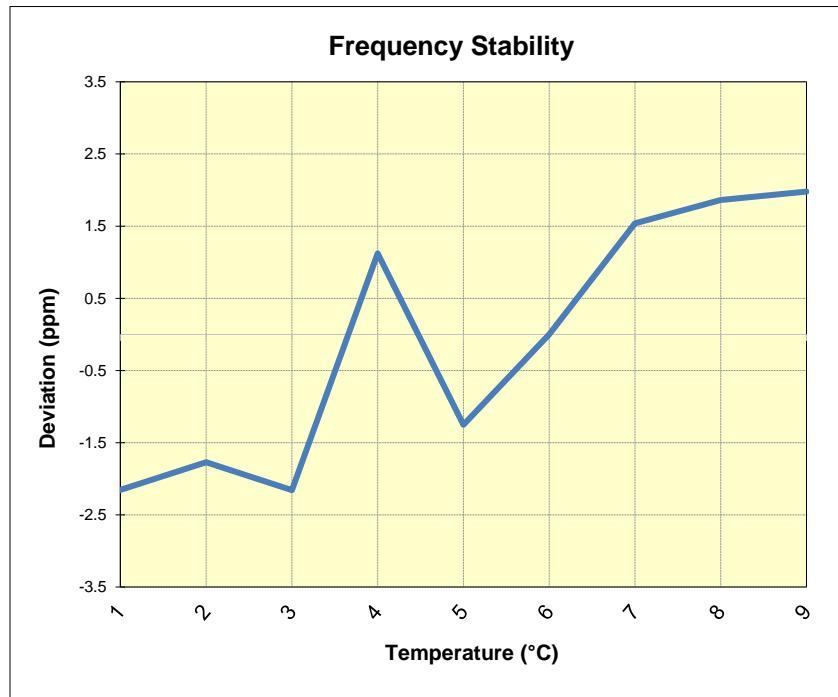

Plot 7-36. Frequency Stability Chart

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 41 of 42

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Brinc LEMUR 2 Controller** **FCC ID: 2BHDHBR00004** complies with all the requirements of Part 90 of the FCC rules.

FCC ID: 2BHDHBR00004	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2406100047-01.2BHDH	Test Dates: 1/20/2024 - 6/19/2024	EUT Type: Controller	Page 42 of 42