



FCC Radio Test Report

FCC ID: 2BHES-RMINI-M1

This report concerns: Original Grant

Project No. : 2406H005
Equipment : Remote Control Receiver
Brand Name : ZOOLION
Test Model : RMINI-M1
Series Model : N/A
Applicant : Hunan Zoomlion Intelligent Technology Co.,Ltd.
Address : No.361, Zoomlion Technology Park, South Yinpen Road, Yuelu District, Changsha City, Hunan Province 410013, P.R. China
Manufacturer : Hunan Zoomlion Intelligent Technology Co.,Ltd.
Address : No.361, Zoomlion Technology Park, South Yinpen Road, Yuelu District, Changsha City, Hunan Province 410013, P.R. China
Factory : Hunan Zoomlion Intelligent Technology Co.,Ltd.
Address : No.361, Zoomlion Technology Park, South Yinpen Road, Yuelu District, Changsha City, Hunan Province 410013, P.R. China
Date of Receipt : Jul. 03, 2024
Date of Test : Jul. 03, 2024~Aug. 13, 2024
Issued Date : Aug. 26, 2024
Report Version : R01
Test Sample : Engineering Sample No.: SH20240703185
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Shanghai)

Louis Li

Prepared by : Louis Li

Riley Wei

Approved by : Riley Wei

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China.

Tel: +86-021-61765666

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 SUPPORT UNITS	10
3.5 CUSTOMER INFORMATION DESCRIPTION	10
4 . CONDUCTED EMISSIONS TEST	11
4.1 LIMIT	11
4.2 TEST PROCEDURE	11
4.3 DEVIATION FROM TEST STANDARD	11
4.4 TEST SETUP	12
4.5 EUT OPERATION CONDITIONS	12
4.6 TEST RESULTS	12
5 . EMC EMISSION TEST	13
5.1 RADIATED EMISSION MEASUREMENT	13
5.1.1 RADIATED EMISSION LIMITS	13
5.1.2 TESTPROCEDURE	15
5.1.3 DEVIATIONFROMTESTSTANDARD	15
5.1.4 TESTSETUP	16
5.1.5 EUT OPERATING CONDITIONS	17
5.1.6 TEST RESULTS (9KHZ TO 30MHZ)	17
5.1.7 TEST RESULTS (30 TO 1000 MHZ)	17
5.1.8 TEST RESULTS(ABOVE1000 MHZ)	17
6 . BANDWIDTH TEST	18
6.1 TEST PROCEDURE	18
6.2 DEVIATION FROM STANDARD	18
6.3 TEST SETUP	18
6.4 EUT OPERATION CONDITIONS	18
6.5 TEST RESULTS	18

Table of Contents	Page
7 . MEASUREMENT INSTRUMENTS LIST	19
8 . EUT TEST PHOTO	21
APPENDIX A - CONDUCTED EMISSIONS	25
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	28
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	33
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	39
APPENDIX E - BANDWIDTH	43

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2406H005	R00	Original Report.	Aug. 22, 2024	Invalid
BTL-FCCP-2-2406H005	R01	Revised report to address TCB's comments.	Aug. 26, 2024	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207(a)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.209 15.249(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.215(c)	Bandwidth	APPENDIX E	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road,

Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

BTL's Registration Number for FCC: 964234

BTL's Designation Number for FCC: CN1374

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB02	9 KHz~30 MHz	-	2.72
	30 MHz~200 MHz	V	4.4
	30 MHz~200 MHz	H	3.16
	200 MHz~1,000 MHz	V	4.6
	200 MHz~1,000 MHz	H	4.2
	1GHz ~ 6GHz	-	4.56
	6GHz ~ 18GHz	-	5.14
	18 ~ 26.5 GHz	-	1.68
	26.5~40 GHz		1.71

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
Conducted Emission	21°C	51%	AC 120V/60Hz	Toby Xiong
Radiated Emissions-9 kHz to 30 MHz	27.5°C	50%	AC 120V/60Hz	Nicole Yan
Radiated Emissions-30 MHz to 1000 MHz	27.5°C~28°C	48%~50%	AC 120V/60Hz	Nicole Yan
Radiated Emissions-Above 1000 MHz	27.5°C	50%	AC 120V/60Hz	Nicole Yan
Bandwidth	27.5°C	50%	AC 120V/60Hz	Nicole Yan

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Remote Control Receiver
Brand Name	ZOOMLION
Test Model	RMINI-M1
Series Model	N/A
Model Difference(s)	N/A
Power Source	DC power supply.
Power Rating	DC 24V, 2A
Operation Frequency	902-928MHz
Modulation Technology	FSK
Max. Field Strength	91.86 dBuV/m(AVG) 105.09 dBuV/m(Peak)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)						
01	904.05	05	909.65	09	915.25	13	920.85
02	905.45	06	911.05	10	916.65	14	922.25
03	906.85	07	912.45	11	918.05	15	923.65
04	908.25	08	913.85	12	919.45	16	925.05

3. Table for Filed Antenna:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	 Tech & Signal	N/A	Monopole antenna	N/A	0.36

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX _904.05 MHz
Mode 2	TX _915.25 MHz
Mode 3	TX _925.05 MHz

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

Conducted emissions test	
Final Test Mode:	Description
Mode 1	TX _904.05 MHz

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 1	TX _904.05 MHz


Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX _904.05 MHz
Mode 2	TX _915.25 MHz
Mode 3	TX _925.05 MHz

Bandwidth test	
Final Test Mode	Description
Mode 1	TX _904.05 MHz
Mode 2	TX _915.25 MHz
Mode 3	TX _925.05 MHz

Note:

- (1) For Conducted emissions and Radiated Emission Below 1GHz test, the mode 1 was found to be the worst case and recorded.

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

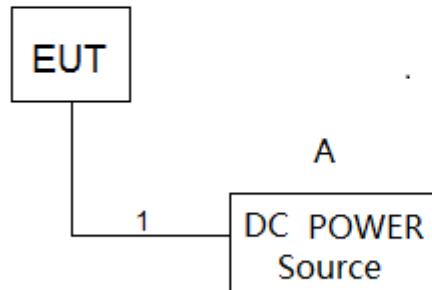

3.4 SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model No.	Series No.
A	DC Power Source	GWINSTEK	Gpc-3030DN	SH-E-152

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m

3.5 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer. Except for radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. CONDUCTED EMISSIONS TEST

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

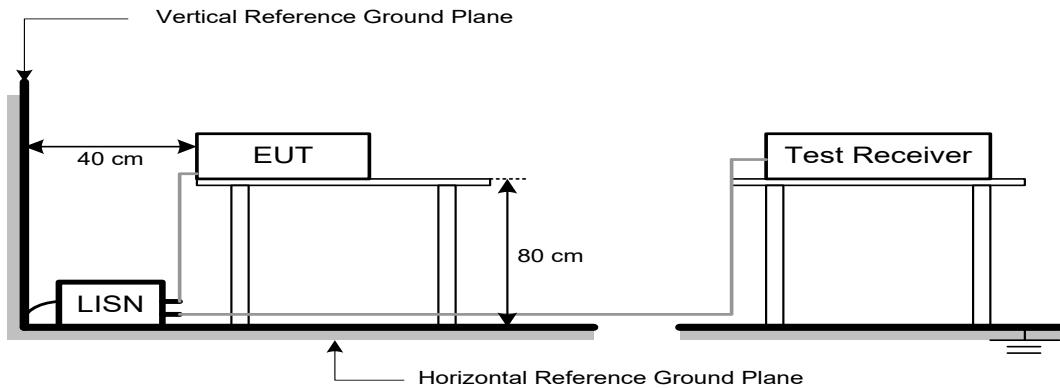

4.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. EMC EMISSION TEST

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 RADIATED EMISSION LIMITS (FCC 15.209 and 15.249)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Harmonic emissions limits comply with below 54dB_uV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Fundamental Frequency	Field Strength of Fundamental (micorvolts/meter)	Field Strength of Harmonics (micorvolts/meter)
902-928 MHz	50	500

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.209)

FREQUENCY (MHz)	(dB _u V/m) (at 3m)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:


- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB_uV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

DWELL TIME OF PERIODIC OPERATION MEASUREMENT

Duty Cycle = On Time/Total Time

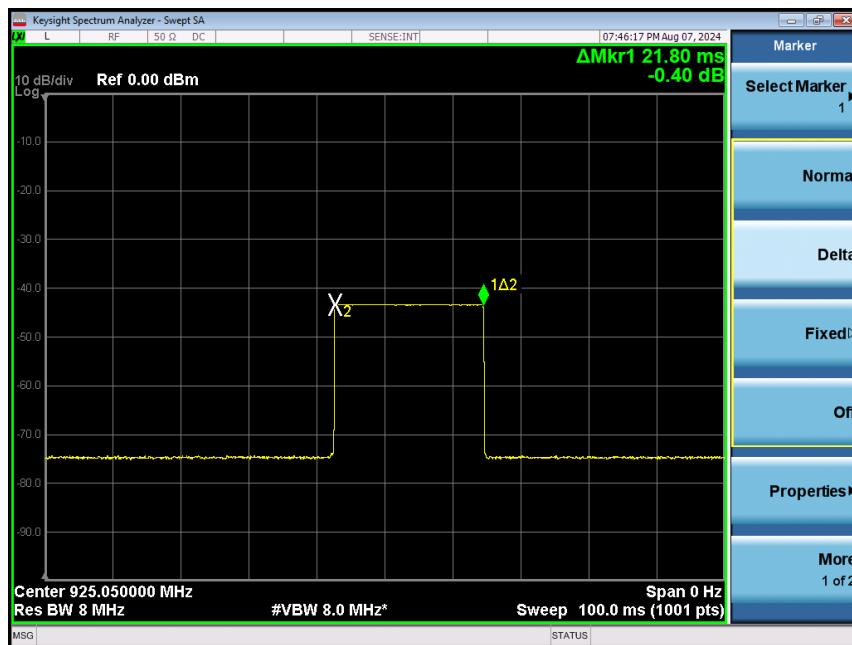 T_{ON} : 21.80ms T_{Total} : 100 msDuty cycle= $21.80/100 = 21.80\%$ Average Reading = Peak value + $20\log(\text{Duty cycle})$, AV=Peak-13.23

5.1.2 TESTPROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3 DEVIATIONFROMTESTSTANDARD


No deviation

5.1.4 TESTSETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

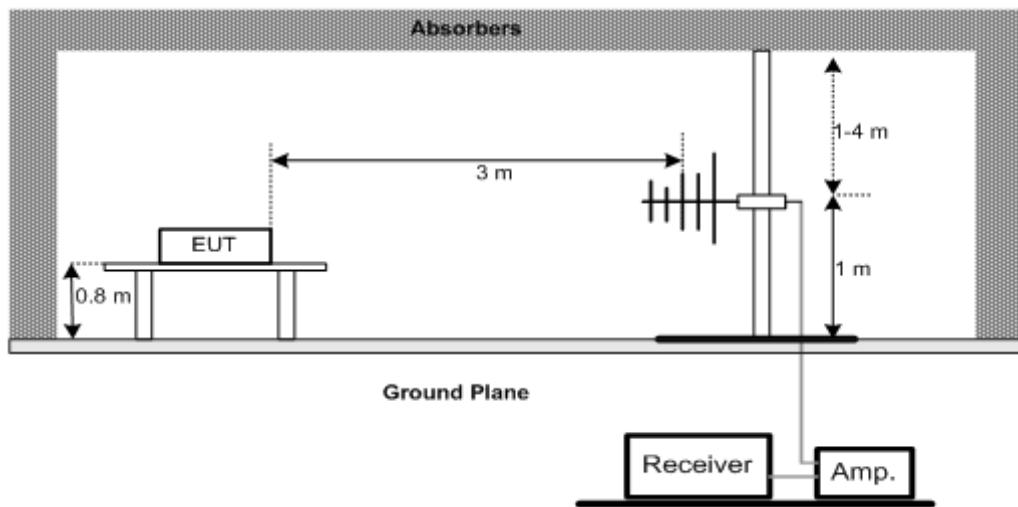

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

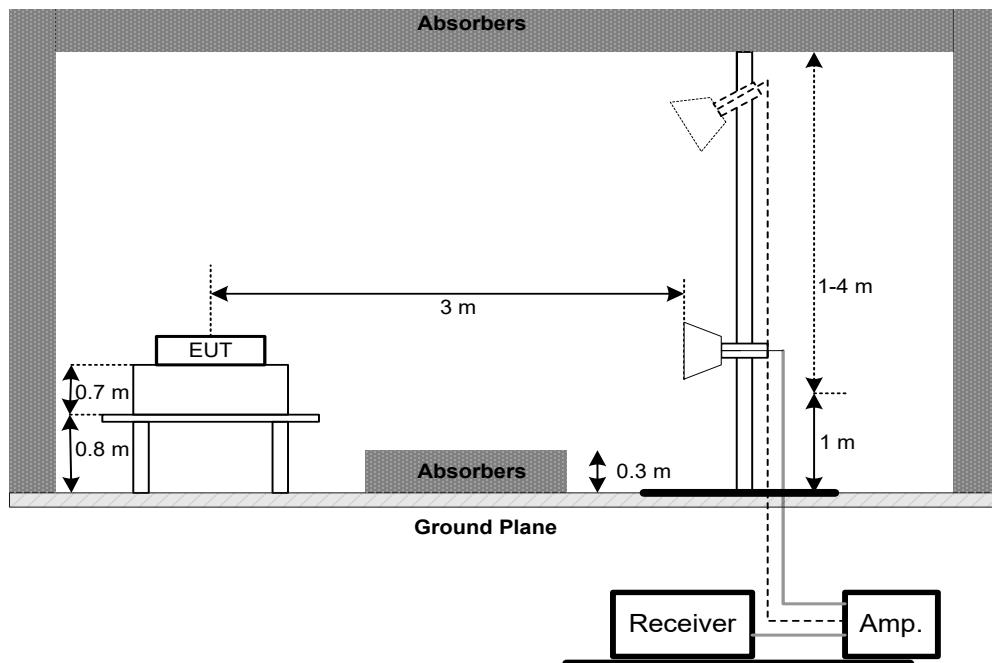

(C) For radiated emissions below 30MHz

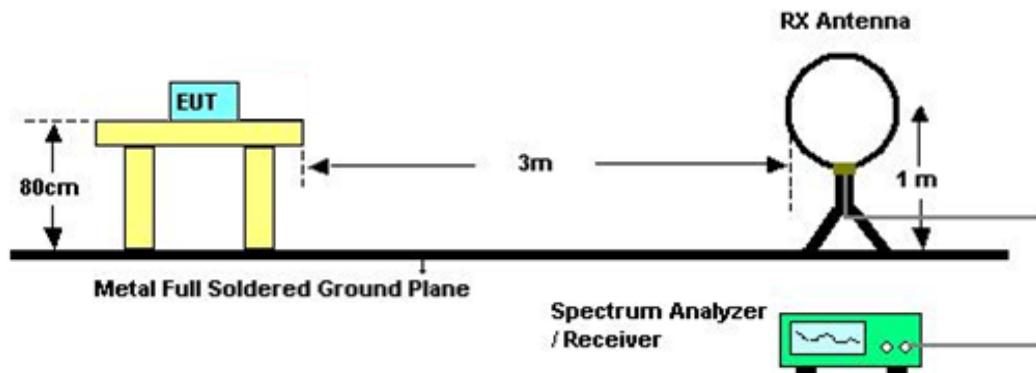

5.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.6 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B.

5.1.7 TEST RESULTS (30 TO 1000 MHZ)

Please refer to the Appendix C.

5.1.8 TEST RESULTS(ABOVE1000 MHZ)

Please refer to the Appendix D.

Remark:

- (1) EUT Orthogonal Axis:
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand □ "Z" - denotes Side Stand
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

6. BANDWIDTH TEST

6.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 3kHz, VBW=3kHz, Sweep time = Auto.

6.2 DEVIATION FROM STANDARD

No deviation.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.5 TEST RESULTS

Please refer to the Appendix E.

7. MEASUREMENT INSTRUMENTS LIST

Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Feb. 2, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Jul. 13, 2024 Jul. 12, 2025
3	Test Cable	emci	EMCRG400-BM-N M-10000	N/A	Mar. 09, 2025
4	EMI Test Receiver	R&S	ESR3	100082	Dec.22, 2024
5	50Ω Terminator	SHX	TF2-1G-A	17051601	Feb. 2, 2025
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Feb. 2, 2025
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 12, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400088	Feb. 2, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1	N/A	N/A
4	Wideband Radio Communication Test	R&S	CMW500	129246	Jul. 13, 2024 Jul. 12, 2025
5	Pre-Amplifier	emci	EMC9135	980401	Feb. 2, 2025


Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	emci	VULB 9168	1467	Mar. 12, 2025
2	Pre-Amplifier	emci	EMC9135	980401	Feb. 2, 2025
3	MXE EMI Receiver	Keysight	N9038A	MY56400088	Feb. 2, 2025
4	Test Cable	emci	EMC104-SM-SM-7000	181020	May 20, 2025
5	Test Cable	emci	RWP50-4.6A-SMS M-1M	20200928 002	May 20, 2025
6	Test Cable	emci	EMC104-SM-SM-2500	170618	May 20, 2025
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1	N/A	N/A
8	Wideband Radio Communication Test	R&S	CMW500	129246	Jul. 13, 2024 Jul. 12, 2025


Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	BBHA 9120D	9120D-1817	Mar.12, 2025
2	Pre-Amplifier	emci	EMC051845SE	980725	Jul. 13, 2024 Jul. 12, 2025
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Feb. 2, 2025
4	Test Cable	emci	EMC104-SM-SM-7000	181020	May 20, 2025
5	Test Cable	emci	RWP50-4.6A-SMS M-1M	20200928 002	May 20, 2025
6	Test Cable	emci	EMC104-SM-SM-2500	170618	May 20, 2025
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1	N/A	N/A
8	Wideband Radio Communication Test	R&S	CMW500	129246	Jul. 13, 2024 Jul. 12, 2025
9	Antenna	Schwarzbeck	BBHA9170	9170-651	Mar. 15, 2025
10	Pre-Amplifier	EMC INSTRUMENT	EMC184045B	980265	Feb. 2, 2025
11	Test Cable	emci	100% S-Parameter Recorded	F02-150819-039	Oct. 21, 2024
12	Test Cable	emci	EMC104-SM-SM-2500	170616	Oct. 21, 2024
13	Test Cable	emci	EMC104-SM-SM-2500	170652	Oct. 21, 2024
14	EXA Spectrum Analyzer	Keysight	N9010A	MY56480559	Feb. 2, 2025

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Jul. 13, 2024 Jul. 12, 2025
2	BTL Conducted Test	BTL	20231123	N/A	N/A



Remark "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

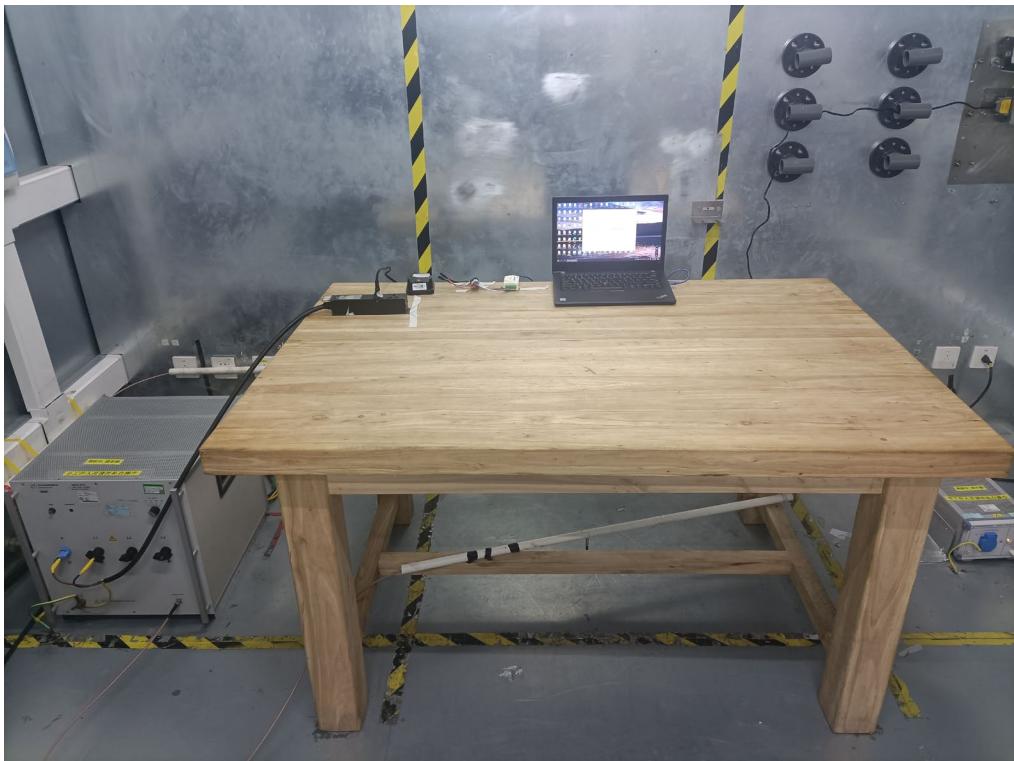8. EUT TEST PHOTO**Conducted Emissions Test Photos**

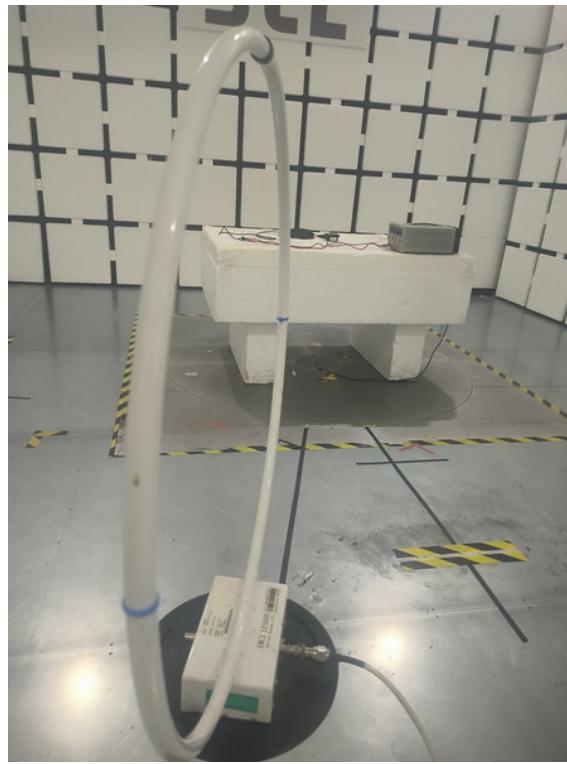
Radiated Emissions Test Photos**9 kHz to 30 MHz**

Radiated Emissions Test Photos**30 MHz to 1000 MHz**

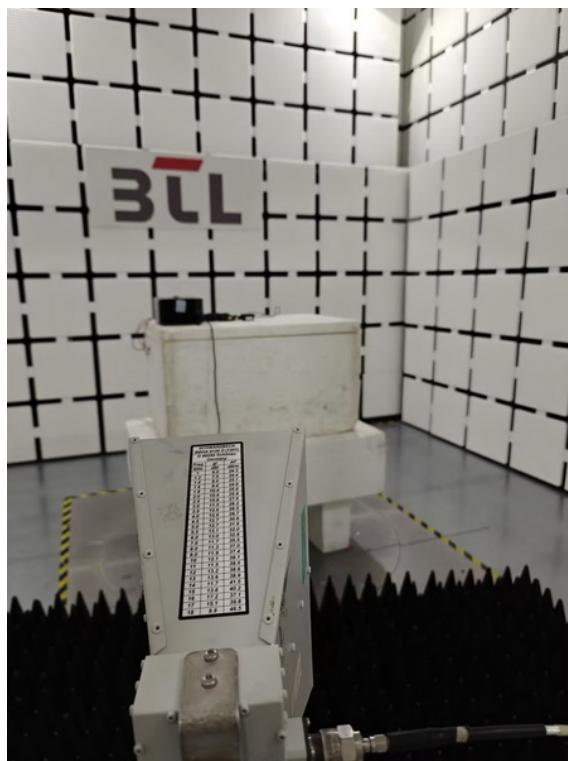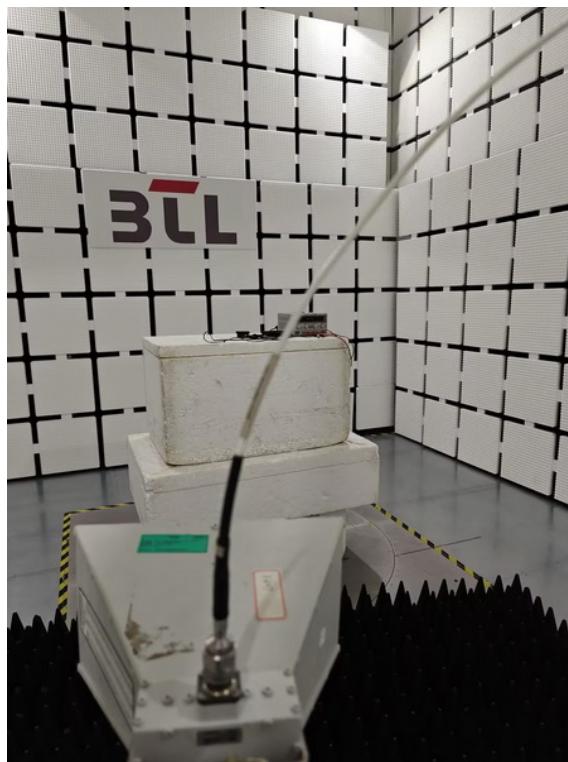Radiated Emissions Test Photos**Above 1 GHz**


APPENDIX A - CONDUCTED EMISSIONS

Test Mode: TX_904.05MHz

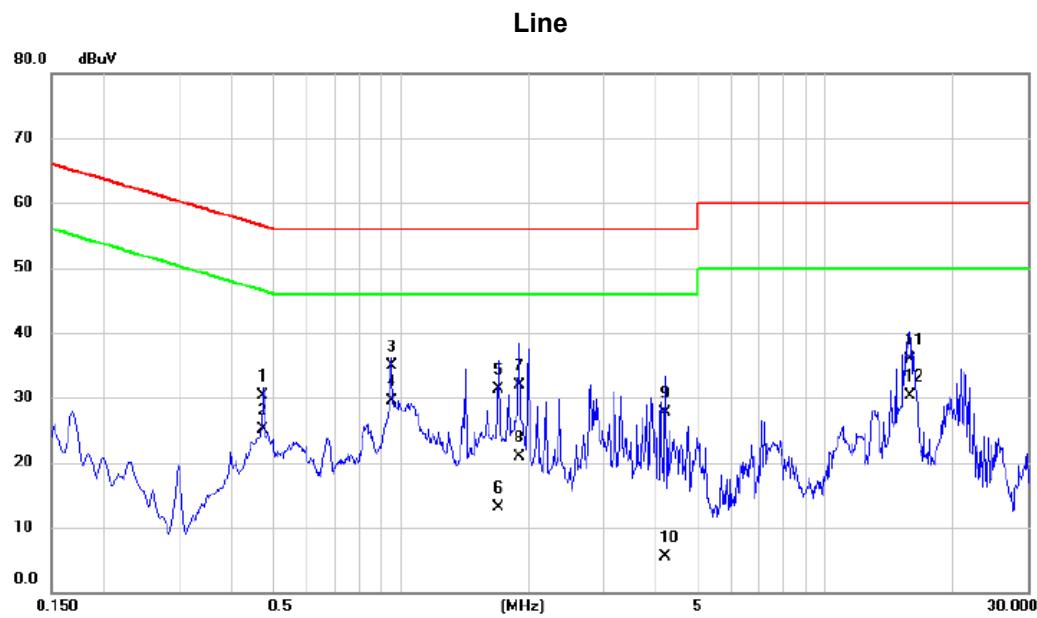

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4740	29.90	0.32	30.22	56.44	-26.22	QP	
2		0.4740	24.70	0.32	25.02	46.44	-21.42	AVG	
3		0.9487	34.50	0.33	34.83	56.00	-21.17	QP	
4	*	0.9487	29.20	0.33	29.53	46.00	-16.47	AVG	
5		1.6980	30.80	0.41	31.21	56.00	-24.79	QP	
6		1.6980	12.60	0.41	13.01	46.00	-32.99	AVG	
7		1.8960	31.40	0.43	31.83	56.00	-24.17	QP	
8		1.8960	20.40	0.43	20.83	46.00	-25.17	AVG	
9		4.1910	27.10	0.52	27.62	56.00	-28.38	QP	
10		4.1910	4.90	0.52	5.42	46.00	-40.58	AVG	
11		15.8595	34.80	1.09	35.89	60.00	-24.11	QP	
12		15.8595	29.30	1.09	30.39	50.00	-19.61	AVG	


Test Mode: TX_904.05MHz

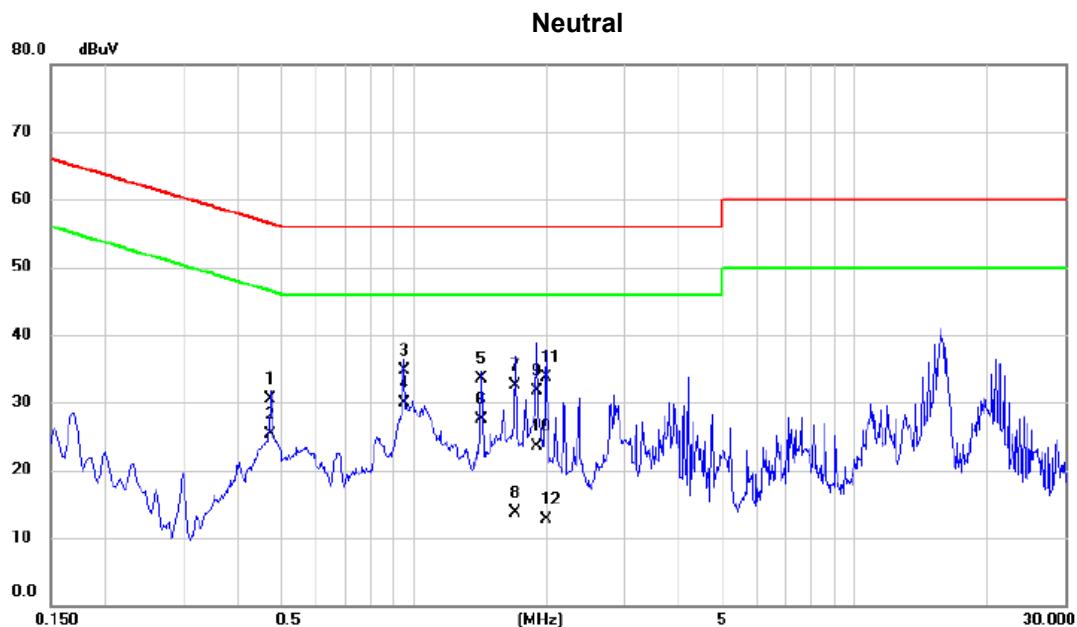

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4740	30.20	0.27	30.47	56.44	-25.97	QP	
2		0.4740	25.10	0.27	25.37	46.44	-21.07	AVG	
3		0.9510	34.40	0.32	34.72	56.00	-21.28	QP	
4 *		0.9510	29.50	0.32	29.82	46.00	-16.18	AVG	
5		1.4258	33.20	0.37	33.57	56.00	-22.43	QP	
6		1.4258	27.10	0.37	27.47	46.00	-18.53	AVG	
7		1.6980	32.20	0.39	32.59	56.00	-23.41	QP	
8		1.6980	13.30	0.39	13.69	46.00	-32.31	AVG	
9		1.8983	31.30	0.42	31.72	56.00	-24.28	QP	
10		1.8983	23.10	0.42	23.52	46.00	-22.48	AVG	
11		1.9973	33.30	0.43	33.73	56.00	-22.27	QP	
12		1.9973	12.30	0.43	12.73	46.00	-33.27	AVG	

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX _904.05MHz	Polarization	Ant 0°
-----------	---------------	--------------	--------

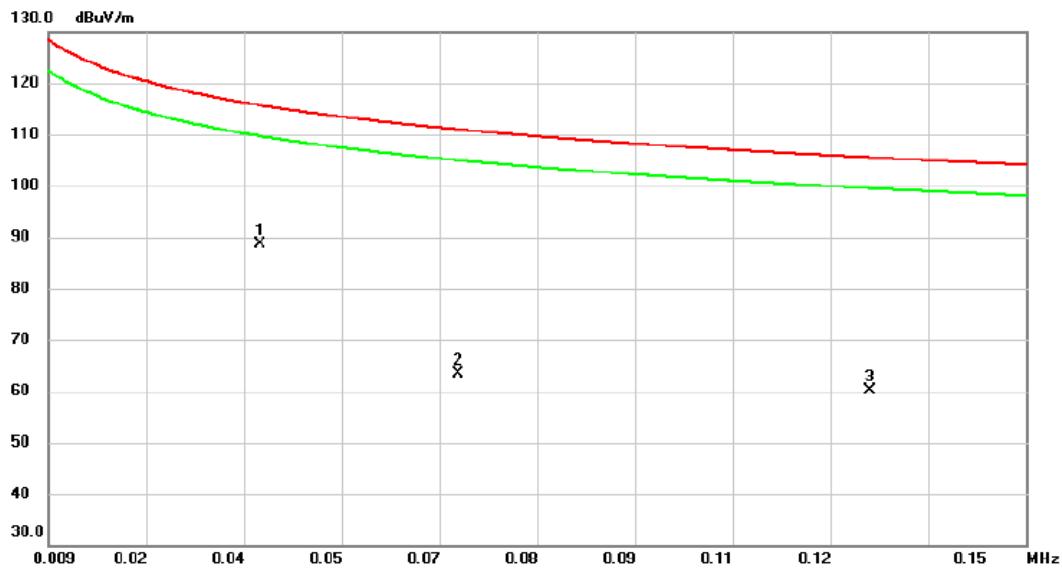

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table			
			Level	Factor	ment							
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	0.0396	23.32	65.23	88.55	115.65	-27.10	peak				
2		0.0682	2.72	60.58	63.30	110.93	-47.63	peak				
3		0.1275	4.14	55.90	60.04	105.50	-45.46	peak				

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX _904.05MHz	Polarization	Ant 0°
-----------	---------------	--------------	--------




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
			Level	Factor	ment			Height	Degree
<hr/>									
1	*	0.6276	9.47	43.19	52.66	71.65	-18.99	peak	
2		14.9556	1.46	35.65	37.11	69.54	-32.43	peak	
3		29.1941	3.30	33.54	36.84	69.54	-32.70	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX _904.05MHz	Polarization	Ant 90°
-----------	---------------	--------------	---------

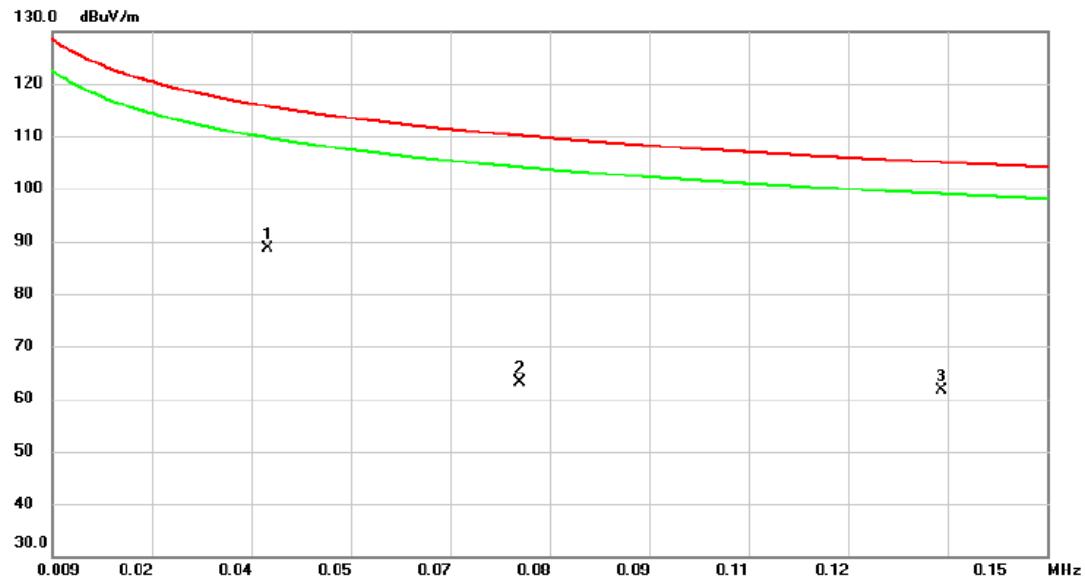


No.	Mk.	Freq.	Reading	Correct	Measure-	Antenna	Table				
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	0.0396	23.47	65.23	88.70	115.65	-26.95	peak			
2		0.0752	3.44	59.67	63.11	110.08	-46.97	peak			
3		0.1350	6.13	55.56	61.69	105.00	-43.31	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX _904.05MHz	Polarization	Ant 90°
-----------	---------------	--------------	---------

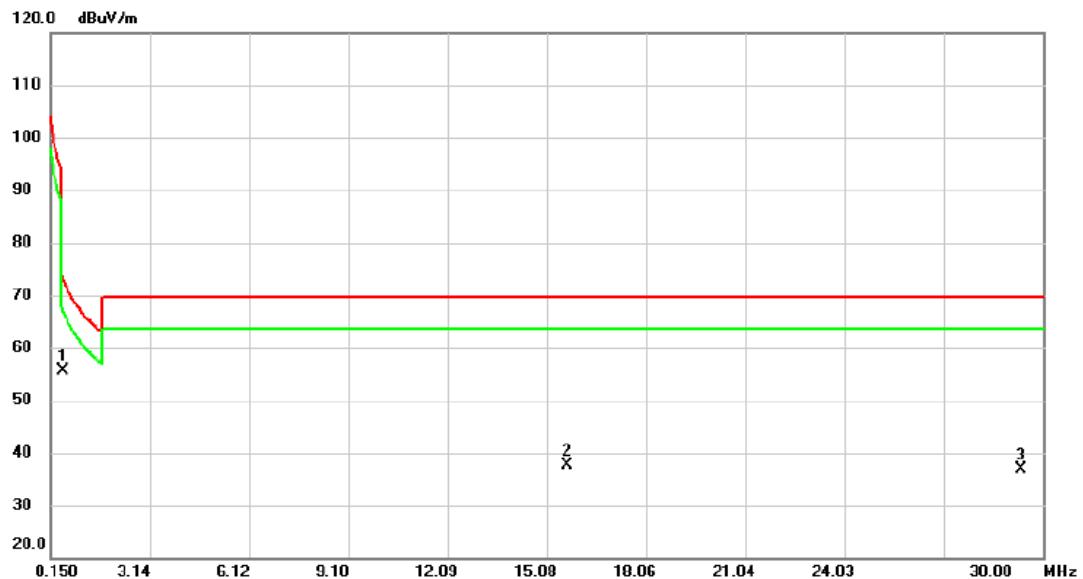


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	0.5380	11.64	44.01	55.65	72.99	-17.34	peak			
2		15.7018	2.25	35.46	37.71	69.54	-31.83	peak			
3		29.3582	2.95	33.82	36.77	69.54	-32.77	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX _904.05MHz	Polarization	Vertical
-----------	---------------	--------------	----------

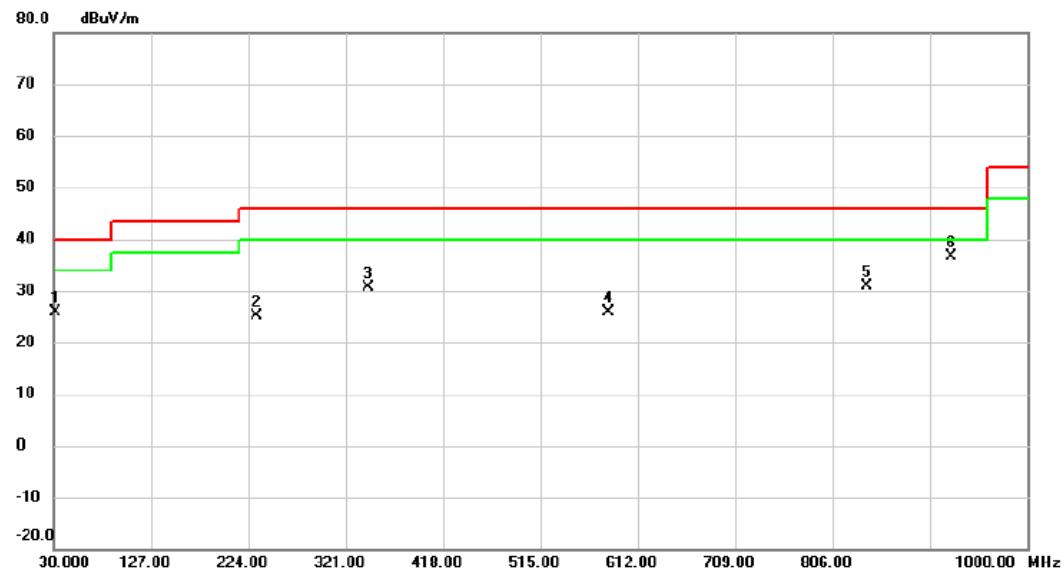


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		31.9400	43.10	-17.22	25.88	40.00	-14.12	peak
2		231.7600	42.07	-16.99	25.08	46.00	-20.92	peak
3		343.7950	43.94	-13.29	30.65	46.00	-15.35	peak
4		583.3850	33.94	-7.96	25.98	46.00	-20.02	peak
5		839.9500	35.64	-4.75	30.89	46.00	-15.11	peak
6	*	924.8250	40.40	-3.88	36.52	46.00	-9.48	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX _904.05MHz	Polarization	Horizontal
-----------	---------------	--------------	------------

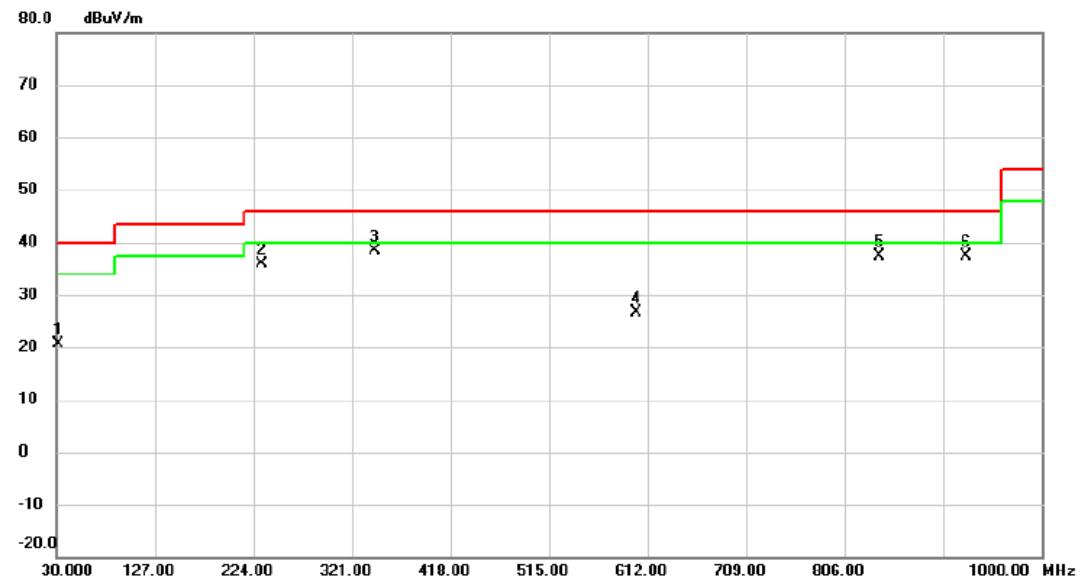


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		31.4550	37.86	-17.30	20.56	40.00	-19.44	peak	
2		232.2450	52.84	-16.95	35.89	46.00	-10.11	peak	
3	*	343.7950	51.58	-13.29	38.29	46.00	-7.71	peak	
4		600.8450	33.93	-7.39	26.54	46.00	-19.46	peak	
5		839.9500	42.05	-4.75	37.30	46.00	-8.70	peak	
6		925.3100	41.18	-3.88	37.30	46.00	-8.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode TX_904.05MHz Polarization Horizontal

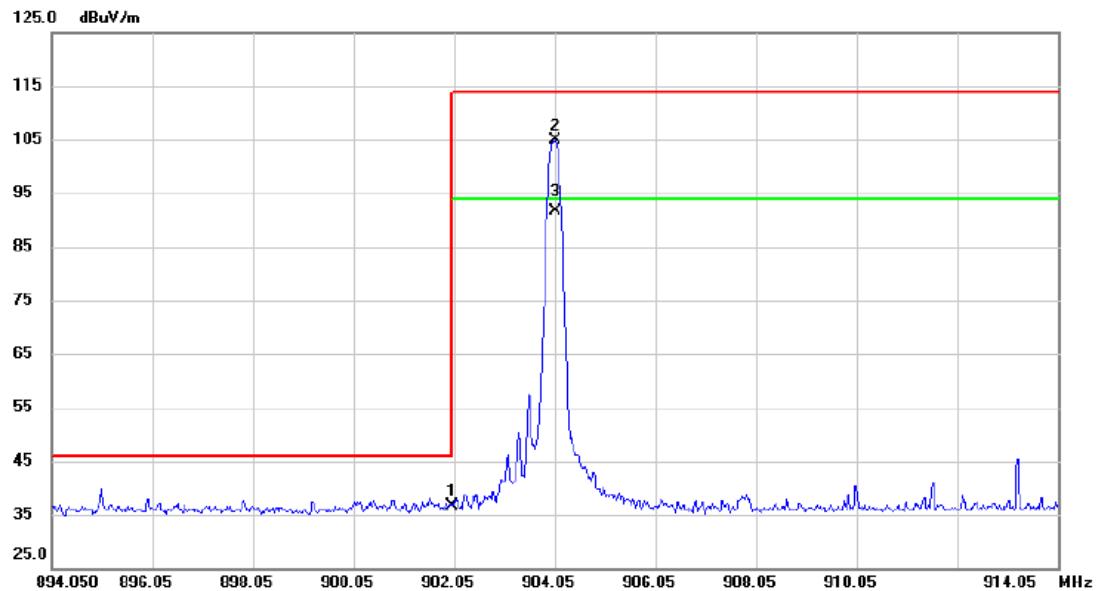


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment		Limit	Margin			
					MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		902.0000	3.59	33.16	36.75	46.00	-9.25	peak			
2		904.0700	71.56	33.20	104.76	114.00	-9.24	peak			
3	*	904.0700	58.33	33.20	91.53	94.00	-2.47	AVG			

Remark:

(1) The average value of fundamental frequency is:
Average Reading = Peak value + $20\log(\text{Duty cycle})$, AV = Peak-13.23

Test Mode	TX _915.25 MHz	Polarization	Horizontal
-----------	----------------	--------------	------------

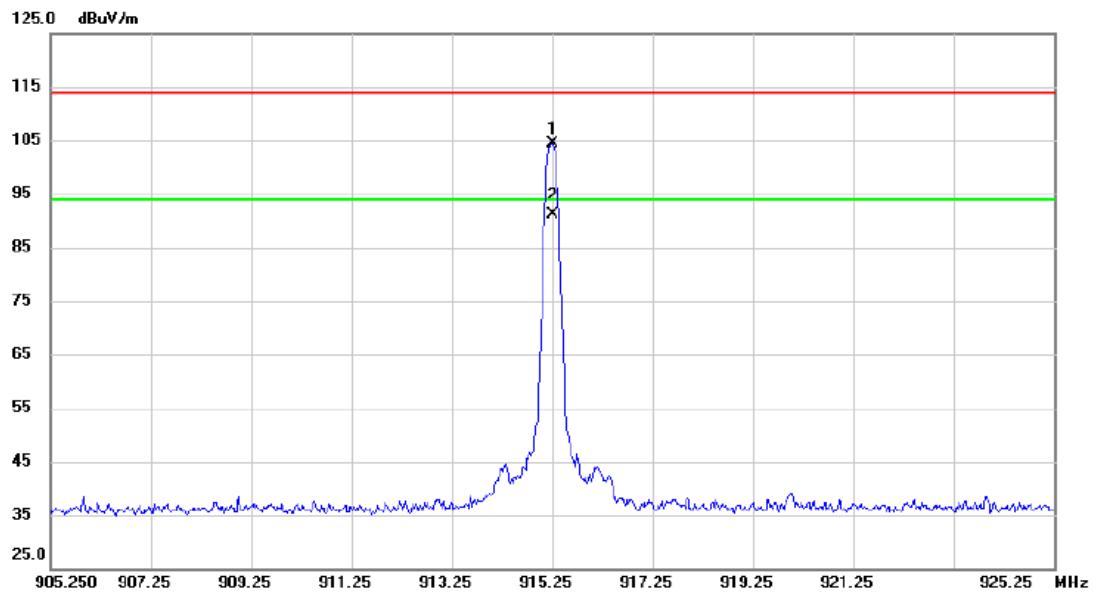


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		915.2600	70.88	33.43	104.31	114.00	-9.69	peak
2	*	915.2600	57.65	33.43	91.08	94.00	-2.92	AVG

Remark:

(1) The average value of fundamental frequency is:
Average Reading = Peak value + 20log(Duty cycle) , AV =Peak-13.23

Test Mode	TX _925.05 MHz	Polarization	Horizontal
-----------	----------------	--------------	------------

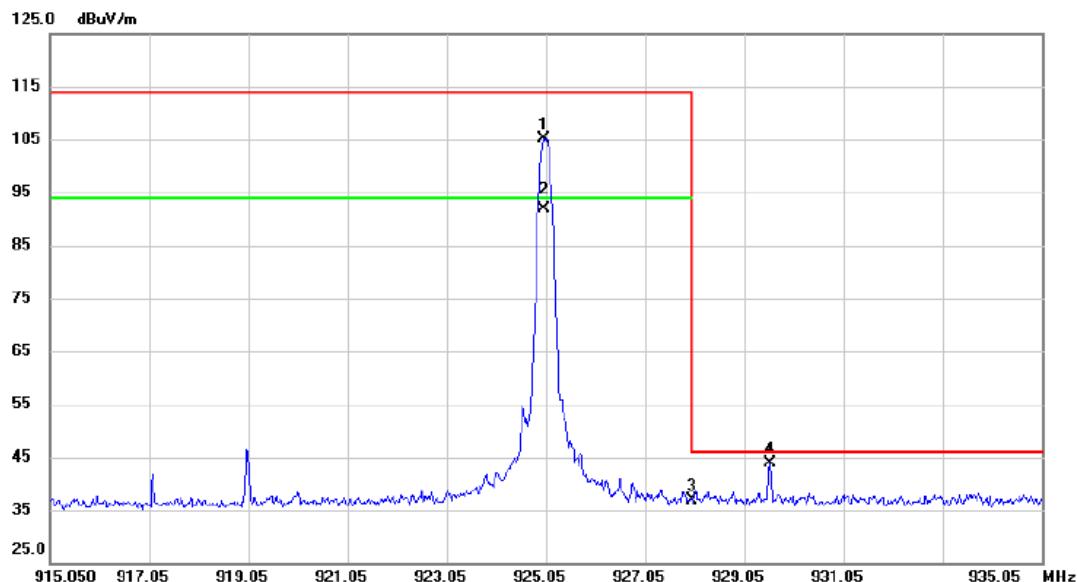


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		925.0200	71.47	33.62	105.09	114.00	-8.91	peak	
2		925.0200	58.24	33.62	91.86	94.00	-2.14	AVG	
3		928.0000	3.08	33.68	36.76	46.00	-9.24	peak	
4	*	929.5600	10.26	33.71	43.97	46.00	-2.03	peak	

Remark:

(1) The average value of fundamental frequency is:
Average Reading = Peak value + 20log(Duty cycle) , AV =Peak-13.23

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX _904.05MHz	Polarization	Vertical
-----------	---------------	--------------	----------

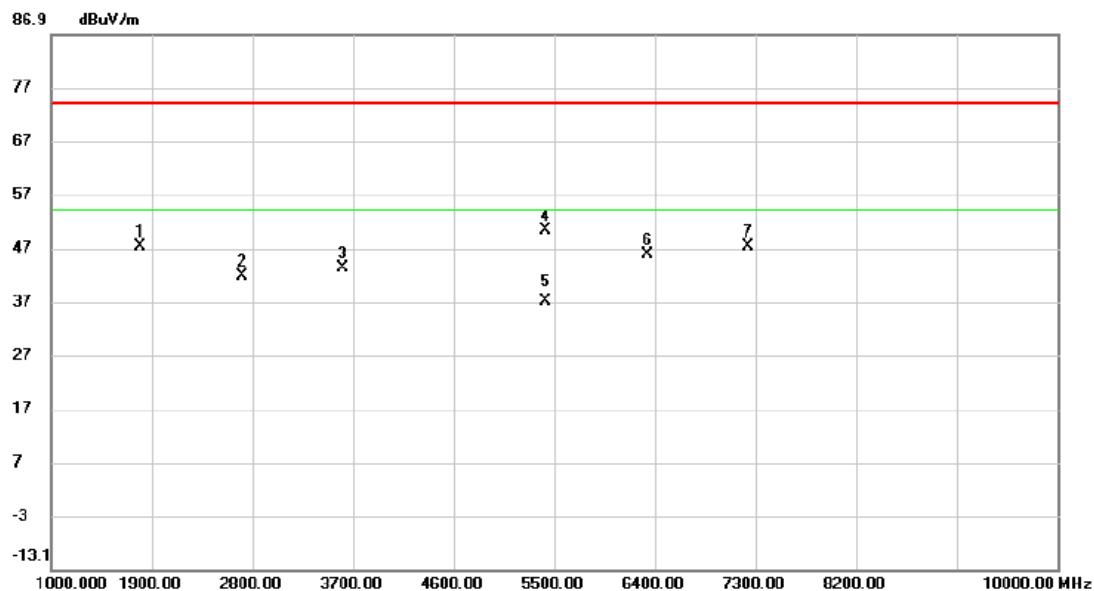


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1801.000	71.15	-23.87	47.28	74.00	-26.72	peak	
2		2710.000	62.29	-20.56	41.73	74.00	-32.27	peak	
3		3610.000	61.29	-18.04	43.25	74.00	-30.75	peak	
4		5419.000	58.86	-8.68	50.18	74.00	-23.82	peak	
5	*	5419.000	45.63	-8.68	36.95	54.00	-17.05	AVG	
6		6328.000	58.14	-12.26	45.88	74.00	-28.12	peak	
7		7228.000	58.63	-11.45	47.18	74.00	-26.82	peak	

Remark:

(1) The average value of fundamental frequency is:
Average Reading = Peak value + 20log(Duty cycle) , AV =Peak-13.23

Test Mode	TX _915.25 MHz	Polarization	Vertical
-----------	----------------	--------------	----------

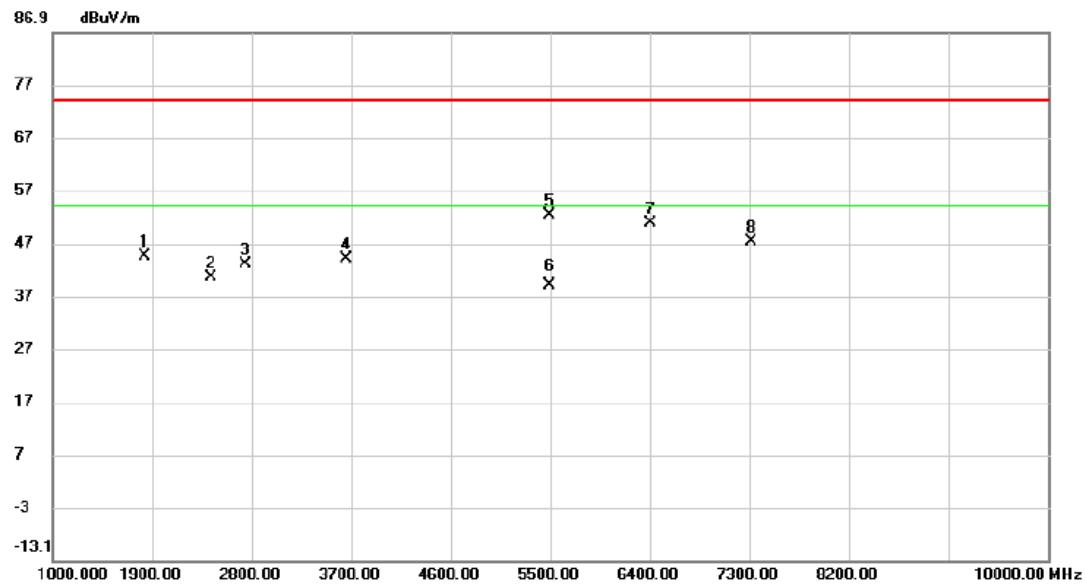


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1828.000	68.42	-23.81	44.61	74.00	-29.39	peak	
2		2431.000	62.27	-21.73	40.54	74.00	-33.46	peak	
3		2746.000	63.48	-20.41	43.07	74.00	-30.93	peak	
4		3655.000	61.93	-17.84	44.09	74.00	-29.91	peak	
5		5491.000	60.78	-8.40	52.38	74.00	-21.62	peak	
6	*	5491.000	47.55	-8.40	39.15	54.00	-14.85	AVG	
7		6400.000	63.19	-12.34	50.85	74.00	-23.15	peak	
8		7322.500	58.50	-11.25	47.25	74.00	-26.75	peak	

Remark:

(1) The average value of fundamental frequency is:
Average Reading = Peak value + 20log(Duty cycle) , AV =Peak-13.23

Test Mode	TX _925.05 MHz	Polarization	Vertical
-----------	----------------	--------------	----------

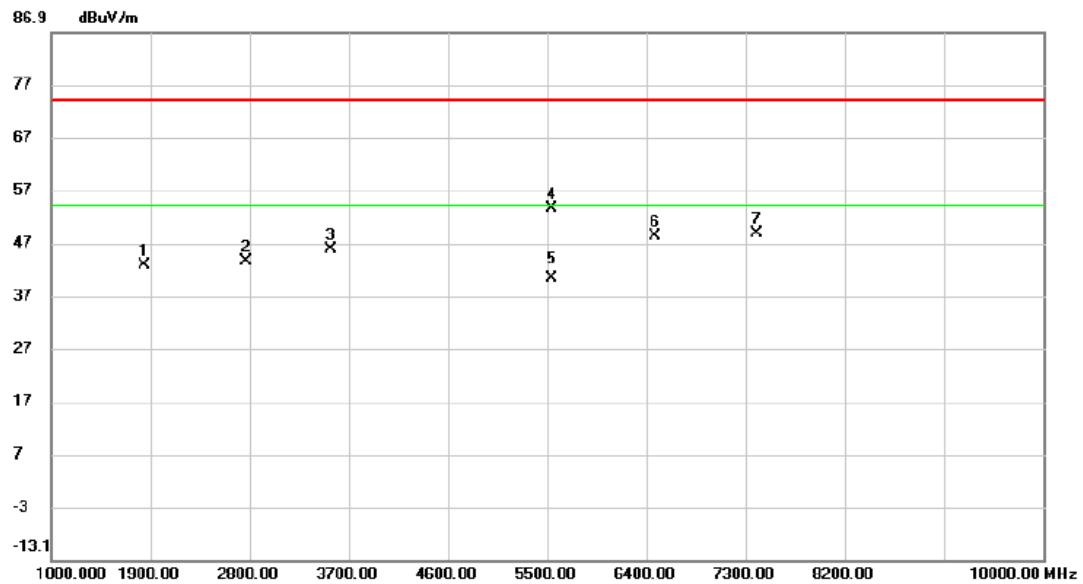

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin Detector	Comment
1		1846.000	66.42	-23.76	42.66	74.00	-31.34	peak
2		2773.000	63.86	-20.29	43.57	74.00	-30.43	peak
3		3538.000	64.01	-18.35	45.66	74.00	-28.34	peak
4		5545.000	62.23	-8.69	53.54	74.00	-20.46	peak
5	*	5545.000	49.00	-8.69	40.31	54.00	-13.69	AVG
6		6472.000	60.71	-12.43	48.28	74.00	-25.72	peak
7		7399.000	59.82	-11.11	48.71	74.00	-25.29	peak


Remark:

(1) The average value of fundamental frequency is:
Average Reading = Peak value + 20log(Duty cycle) , AV =Peak-13.23

APPENDIX E - BANDWIDTH

Test Mode	TX Mode
-----------	---------

Frequency (MHz)	20 dB Bandwidth (MHz)
904.05	0.3104
915.25	0.3079
925.05	0.3080

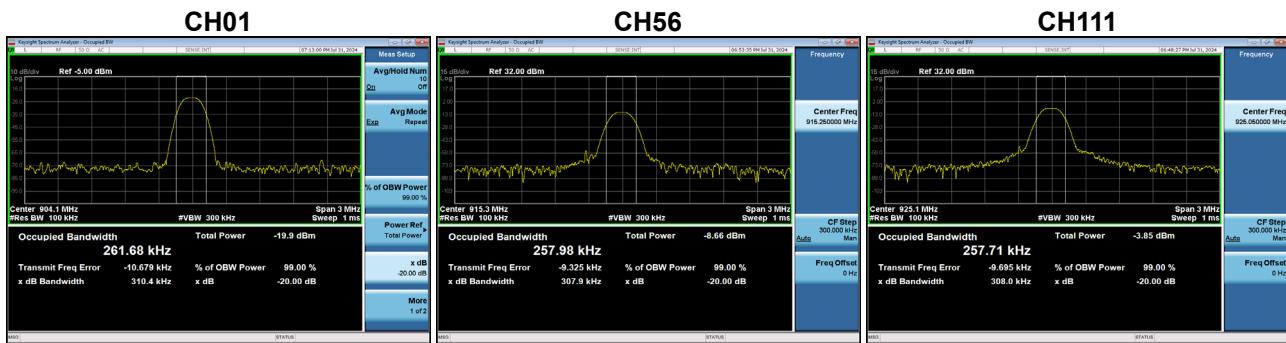

End of Test Report