

Manufacturer:Caddx Technology (Shenzhen) Co., Ltd.

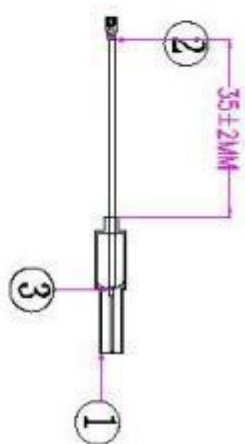
Address:13/F, Minrray Building, No.5 Ganli Sixth Road, Jihua Street, Longgang District, Shenzhen City, Guangdong Province, China

ShenZhen XinErSheng Technology Co.,Ltd

Main technical specifications

Main technical specifications	
Frequency Range(GHZ)	5.15-5.85
Impedance(Ω)	50 ± 10
Gain(dBi)	2.5 ± 0.5
ReTurnLoss(dB)	≤ -8
VSWR	≤ 2
Polarization	Linear Vertical
Connector Type	Weld
Physical Properties	
Antenna Base	copper
Operating Temp	-20℃-+60℃
Storage Temp	-20℃-+70℃

Picture



Specification:

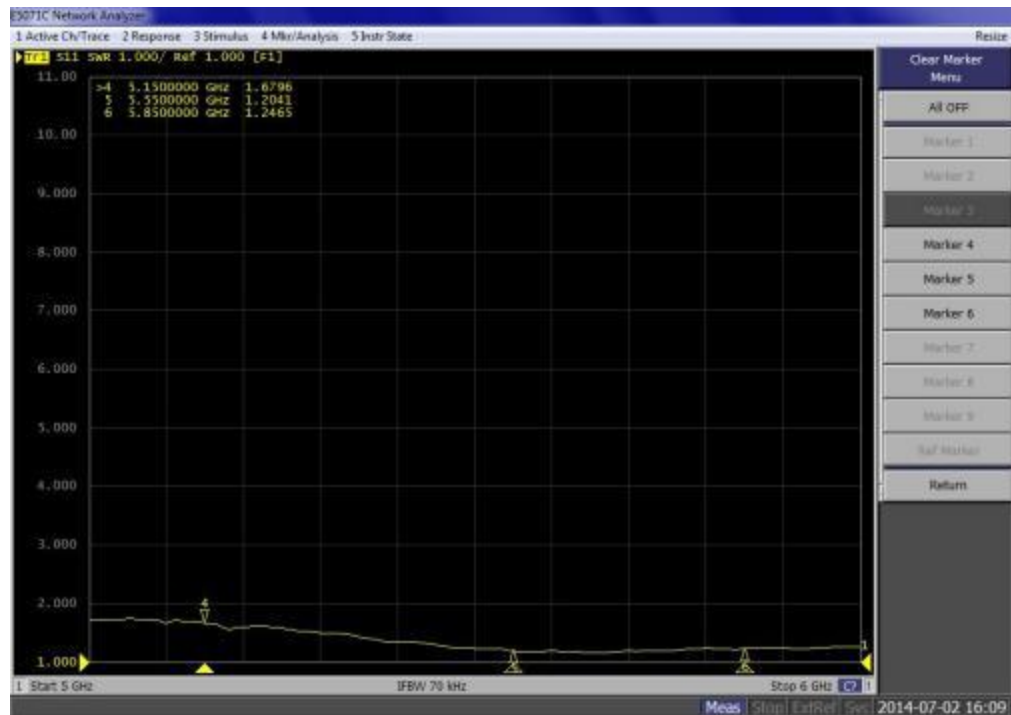
Frequency Rang: 5150-5850MHZ

Return loss:-8DB or less

VSWR: 2.0 Max

Gain: 2.5 dbi










Network
AnalyzerTest Report:
standing-wave
ratio:



relative gain:



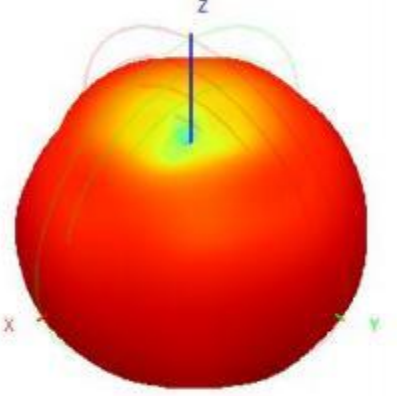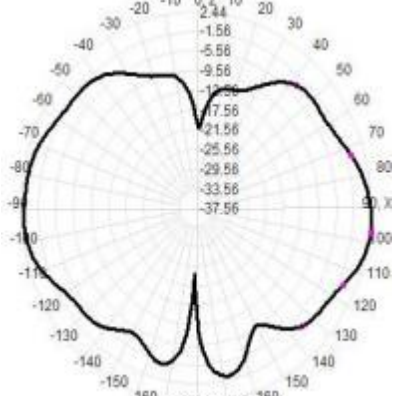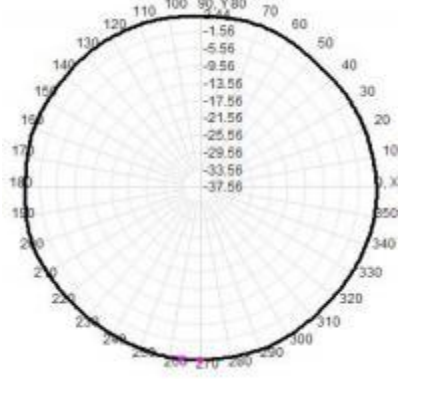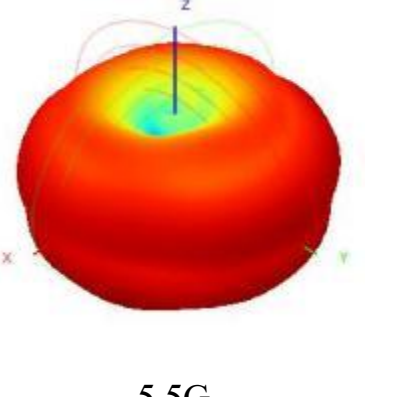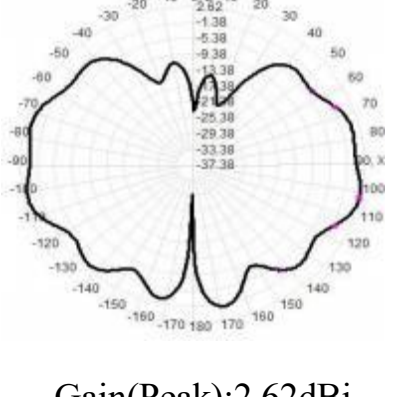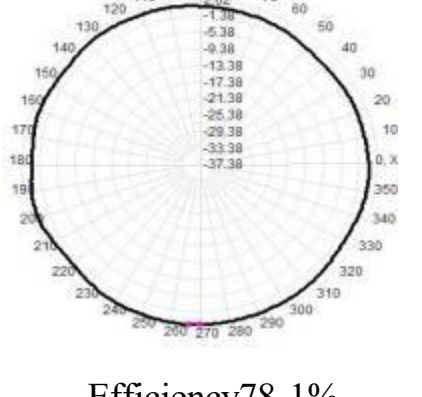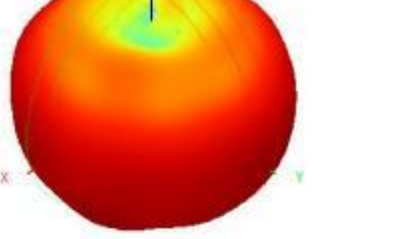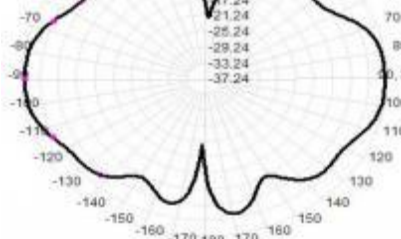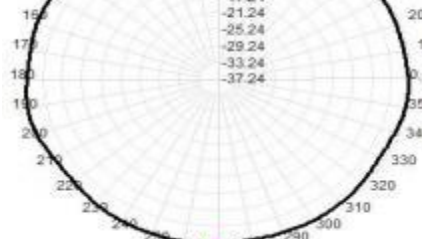2D、3DRaditation Pattern

		
5.15G	Gain(Peak):2.44dBi	Efficiency:71.5%
		
5.5G	Gain(Peak):2.62dBi	Efficiency78.1%
		
5.85G	Gain(Peak):2.76dBi	Efficiency:77.8%