


Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Vertical	PASS

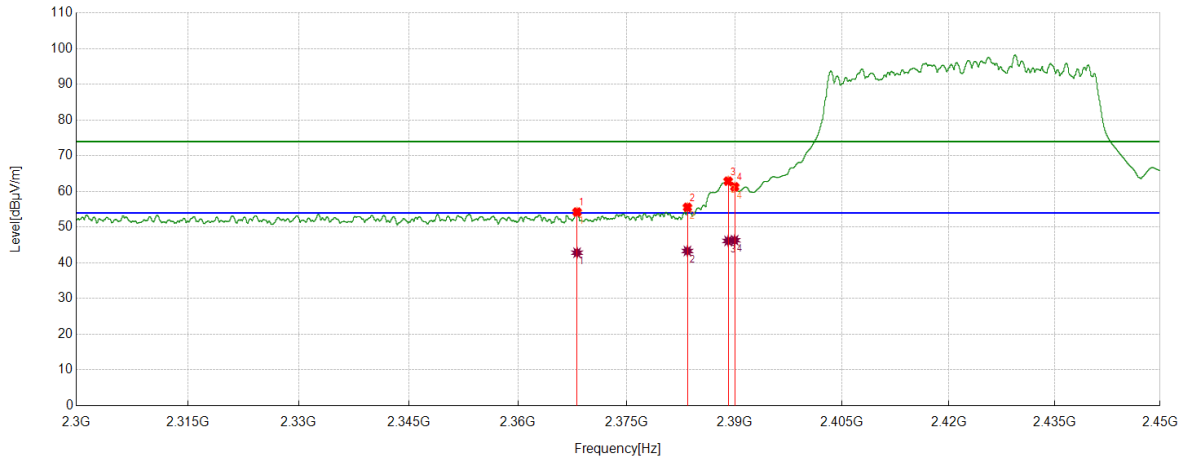

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2368.1460	40.71	13.53	54.24	74.00	-19.76	Vertical
2	2383.4292	42.00	13.56	55.56	74.00	-18.44	Vertical
3	2389.0924	49.40	13.49	62.89	74.00	-11.11	Vertical
4	2390.0000	47.82	13.48	61.30	74.00	-12.70	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2368.1460	29.31	13.53	42.84	54.00	-11.16	Vertical
2	2383.4292	29.77	13.56	43.33	54.00	-10.67	Vertical
3	2389.0924	32.66	13.49	46.15	54.00	-7.85	Vertical
4	2390.0000	32.86	13.48	46.34	54.00	-7.66	Vertical


Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.

2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).

3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Horizontal	PASS

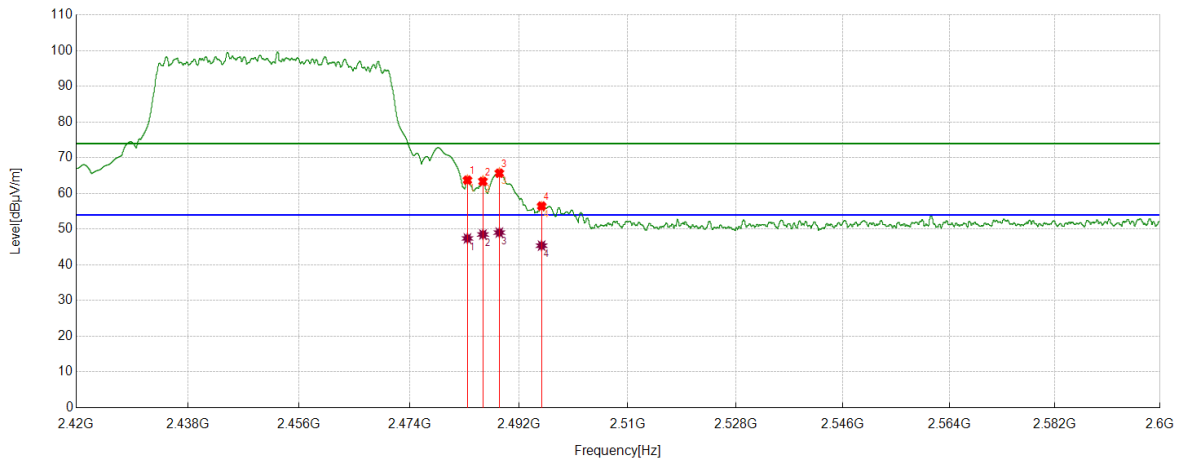

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	49.49	14.25	63.74	74.00	-10.26	Horizontal
2	2486.0458	49.06	14.30	63.36	74.00	-10.64	Horizontal
3	2488.7461	51.33	14.34	65.67	74.00	-8.33	Horizontal
4	2495.7220	42.16	14.31	56.47	74.00	-17.53	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	33.16	14.25	47.41	54.00	-6.59	Horizontal
2	2486.0458	34.22	14.30	48.52	54.00	-5.48	Horizontal
3	2488.7461	34.71	14.34	49.05	54.00	-4.95	Horizontal
4	2495.7220	31.08	14.31	45.39	54.00	-8.61	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Vertical	PASS

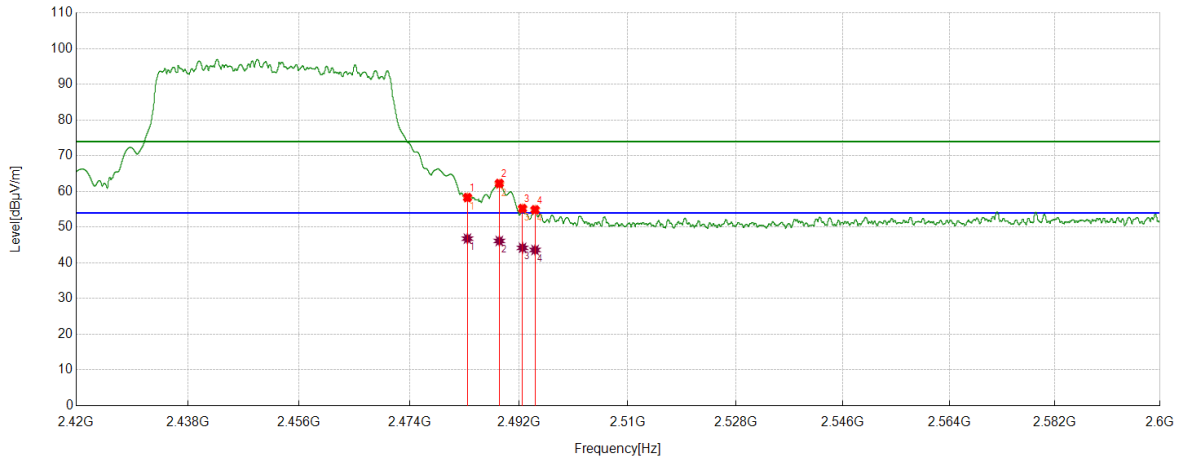

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	44.06	14.25	58.31	74.00	-15.69	Vertical
2	2488.7461	47.92	14.34	62.26	74.00	-11.74	Vertical
3	2492.5716	40.88	14.35	55.23	74.00	-18.77	Vertical
4	2494.6418	40.54	14.33	54.87	74.00	-19.13	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	32.54	14.25	46.79	54.00	-7.21	Vertical
2	2488.7461	31.80	14.34	46.14	54.00	-7.86	Vertical
3	2492.5716	29.86	14.35	44.21	54.00	-9.79	Vertical
4	2494.6418	29.28	14.33	43.61	54.00	-10.39	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.4. SPURIOUS EMISSIONS

TEST RESULTS TABLE

1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AX HE20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AX HE40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

2) For 9kHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS


Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

Part 1: 1GHz~6.5GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

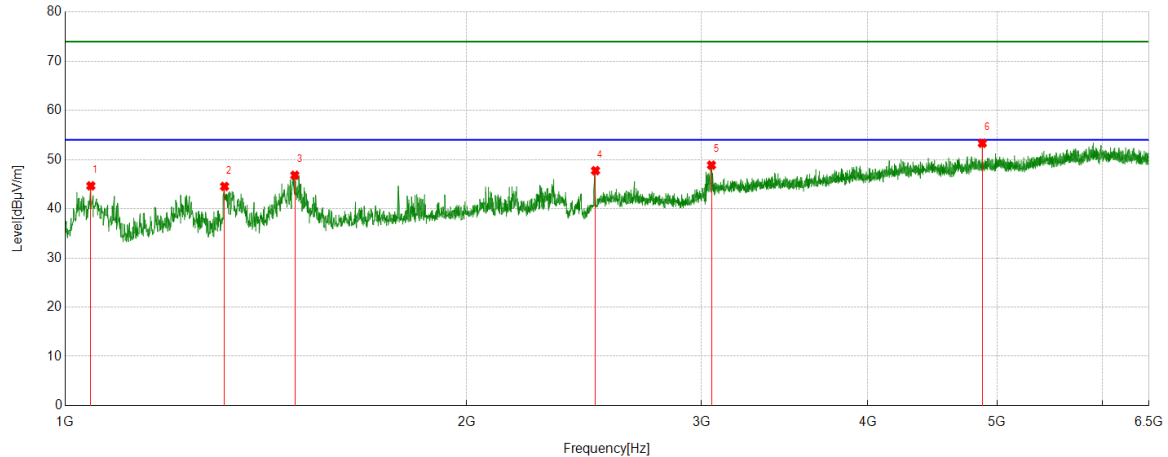


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1045.3807	46.14	-1.48	44.66	74.00	-29.34	Horizontal
2	1316.9771	45.82	-1.28	44.54	74.00	-29.46	Horizontal
3	1486.8109	47.09	-0.28	46.81	74.00	-27.19	Horizontal
4	2498.9374	41.88	5.87	47.75	74.00	-26.25	Horizontal
5	3053.1316	40.10	8.77	48.87	74.00	-25.13	Horizontal
6	4873.8592	38.25	15.08	53.33	74.00	-20.67	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

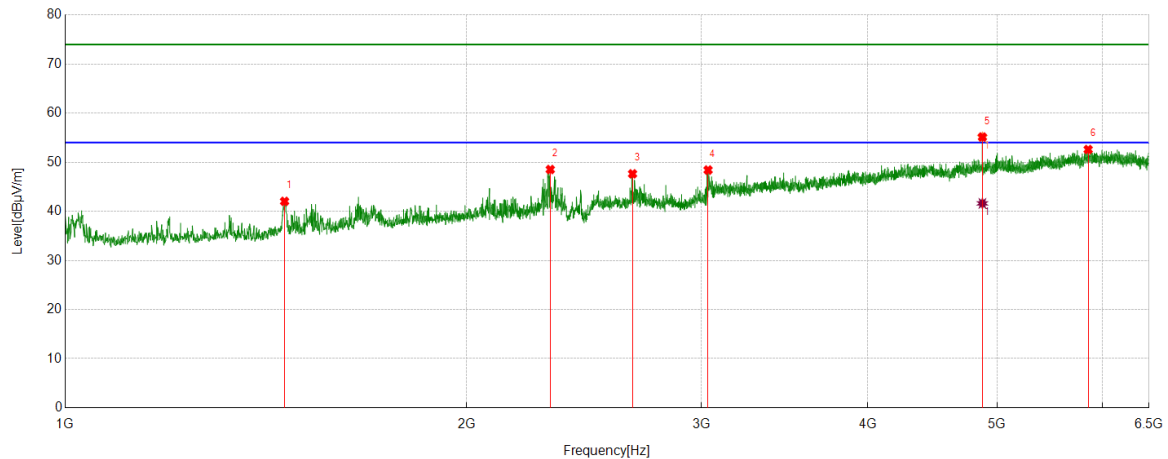

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1460.6826	41.96	0.07	42.03	74.00	-31.97	Vertical
2	2311.2264	44.18	4.34	48.52	74.00	-25.48	Vertical
3	2663.9580	41.53	6.11	47.64	74.00	-26.36	Vertical
4	3035.2544	40.01	8.41	48.42	74.00	-25.58	Vertical
5	4874.5468	40.04	15.10	55.14	74.00	-18.86	Vertical
6	5851.6065	34.59	18.00	52.59	74.00	-21.41	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4874.5468	26.52	15.10	41.62	54.00	-12.38	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

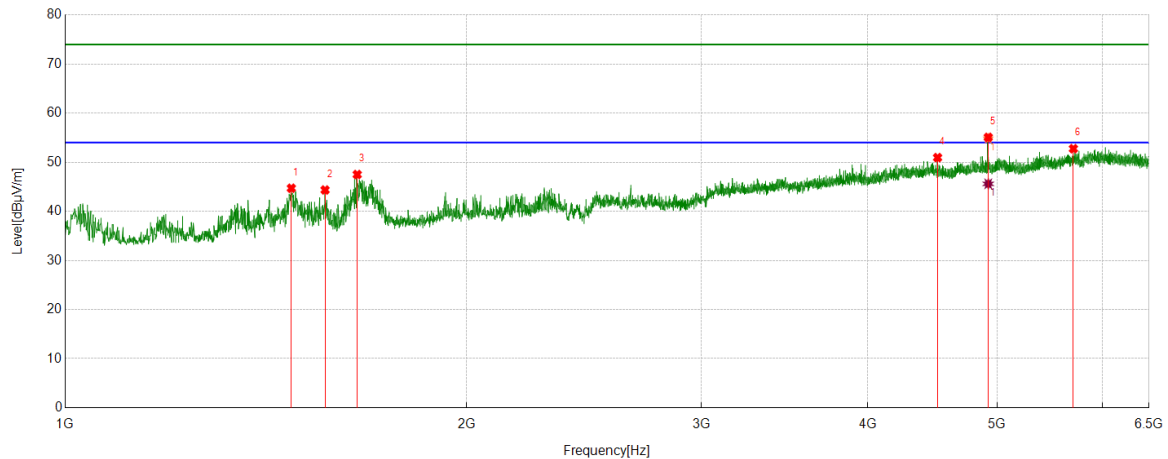

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1477.8722	44.84	-0.13	44.71	74.00	-29.29	Horizontal
2	1566.5708	44.31	0.04	44.35	74.00	-29.65	Horizontal
3	1655.9570	46.51	0.99	47.50	74.00	-26.50	Horizontal
4	4511.5014	37.14	13.81	50.95	74.00	-23.05	Horizontal
5	4924.0530	39.74	15.34	55.08	74.00	-18.92	Horizontal
6	5703.7755	35.30	17.46	52.76	74.00	-21.24	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4924.0530	30.26	15.34	45.60	54.00	-8.40	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

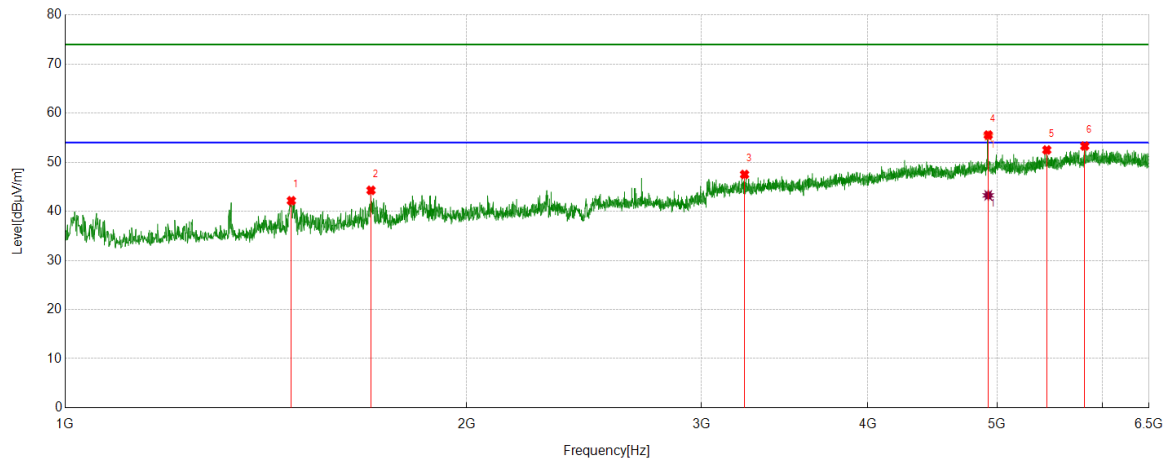

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1477.8722	42.29	-0.13	42.16	74.00	-31.84	Vertical
2	1695.8370	43.05	1.23	44.28	74.00	-29.72	Vertical
3	3232.5916	38.44	9.07	47.51	74.00	-26.49	Vertical
4	4924.0530	40.21	15.34	55.55	74.00	-18.45	Vertical
5	5447.9935	34.93	17.57	52.50	74.00	-21.50	Vertical
6	5817.2272	34.80	18.50	53.30	74.00	-20.70	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4924.0530	27.91	15.34	43.25	54.00	-10.75	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

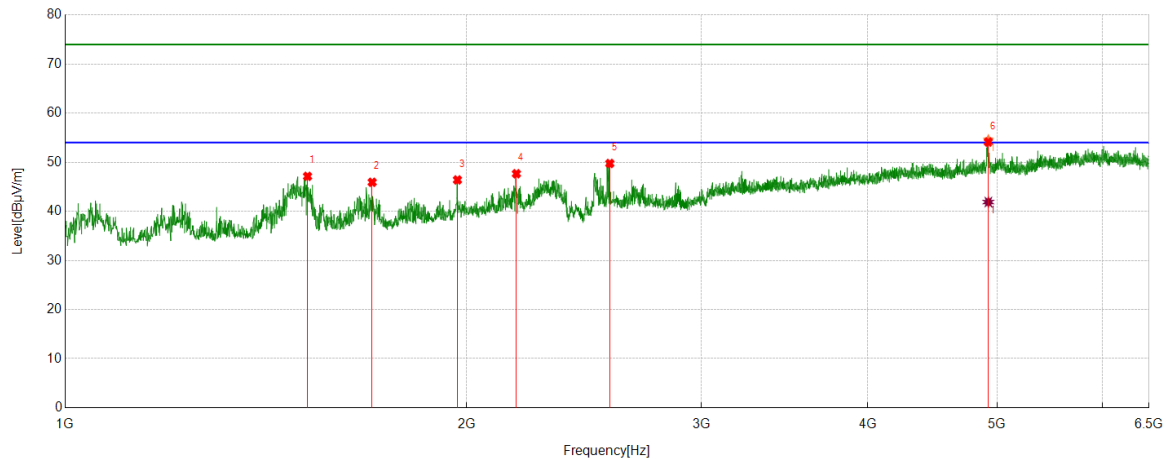

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1519.8150	47.67	-0.54	47.13	74.00	-26.87	Horizontal
2	1699.2749	44.84	1.08	45.92	74.00	-28.08	Horizontal
3	1968.8086	43.42	2.98	46.40	74.00	-27.60	Horizontal
4	2179.8975	43.21	4.45	47.66	74.00	-26.34	Horizontal
5	2561.5077	44.18	5.57	49.75	74.00	-24.25	Horizontal
6	4924.7406	38.78	15.34	54.12	74.00	-19.88	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4924.7406	26.55	15.34	41.89	54.00	-12.11	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

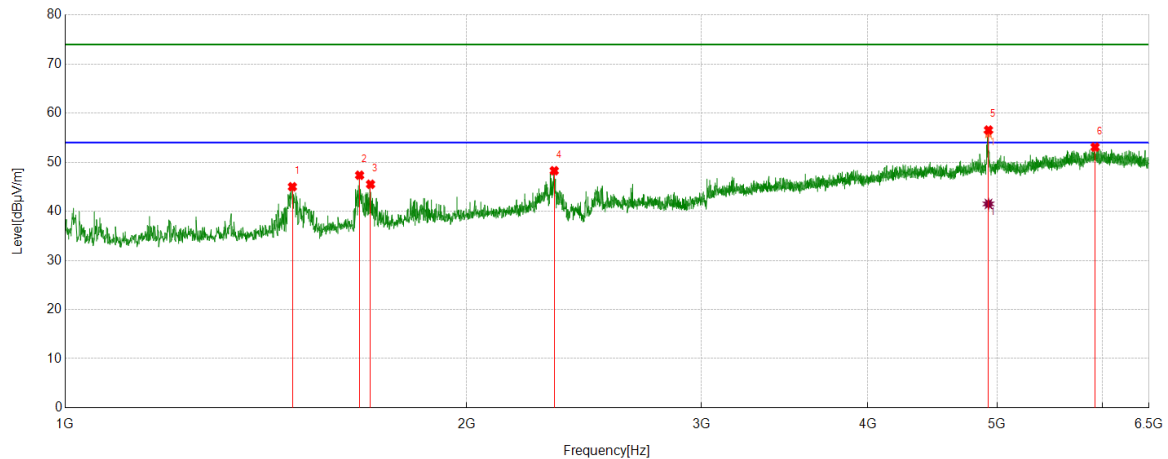

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1480.6226	45.10	-0.10	45.00	74.00	-29.00	Vertical
2	1662.8329	46.22	1.13	47.35	74.00	-26.65	Vertical
3	1694.4618	44.22	1.29	45.51	74.00	-28.49	Vertical
4	2327.0409	43.30	4.97	48.27	74.00	-25.73	Vertical
5	4926.1158	41.22	15.33	56.55	74.00	-17.45	Vertical
6	5921.7402	34.35	18.73	53.08	74.00	-20.92	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4926.1158	26.18	15.33	41.51	54.00	-12.49	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

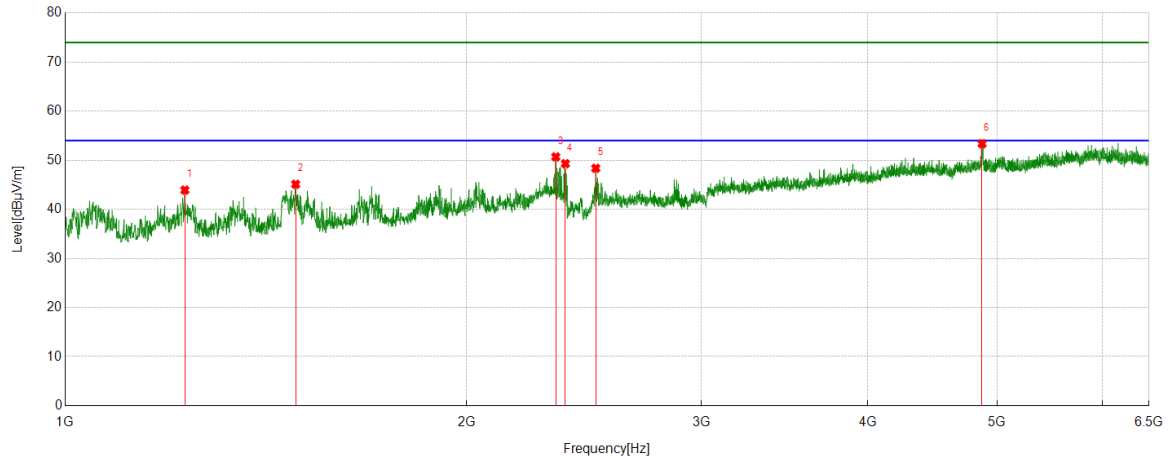


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1229.6537	45.84	-1.92	43.92	74.00	-30.08	Horizontal
2	1488.8736	45.45	-0.34	45.11	74.00	-28.89	Horizontal
3	2333.2292	45.66	5.03	50.69	74.00	-23.31	Horizontal
4	2372.4216	44.48	4.82	49.30	74.00	-24.70	Horizontal
5	2500.3125	42.48	5.88	48.36	74.00	-25.64	Horizontal
6	4871.7965	38.33	15.04	53.37	74.00	-20.63	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

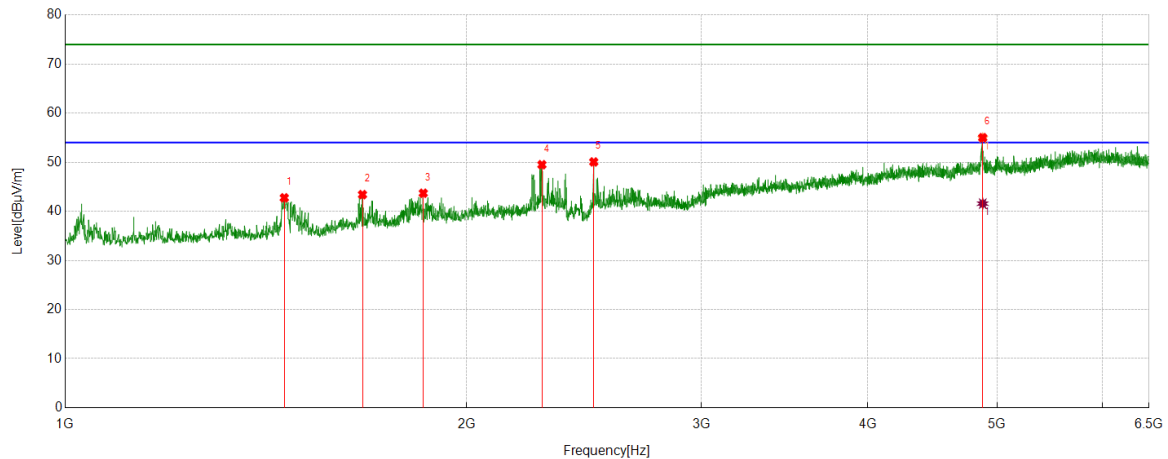

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1459.9950	42.65	0.10	42.75	74.00	-31.25	Vertical
2	1671.0839	42.03	1.38	43.41	74.00	-30.59	Vertical
3	1856.0445	41.73	1.96	43.69	74.00	-30.31	Vertical
4	2278.2223	45.45	4.05	49.50	74.00	-24.50	Vertical
5	2491.3739	44.24	5.82	50.06	74.00	-23.94	Vertical
6	4877.2972	39.85	15.15	55.00	74.00	-19.00	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4877.2972	26.42	15.15	41.57	54.00	-12.43	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

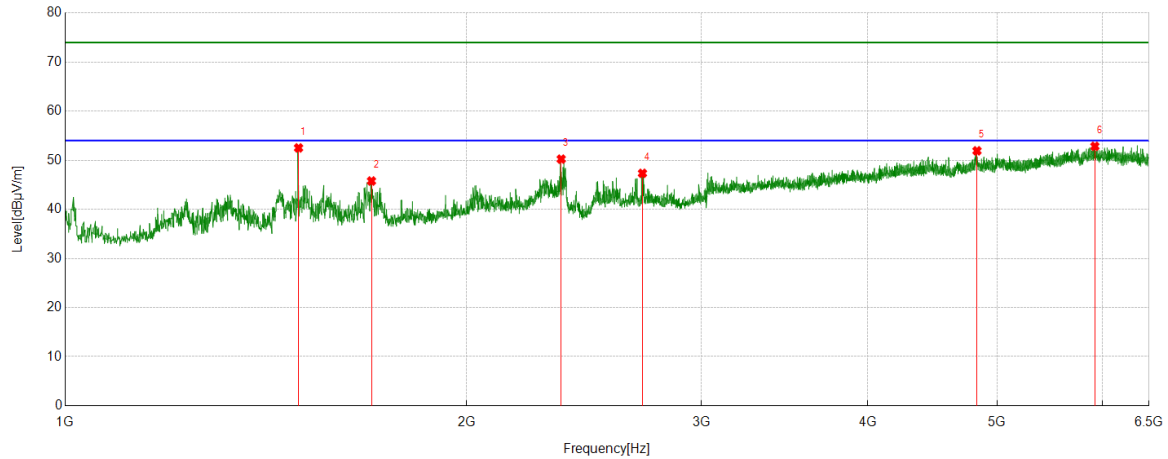


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1496.4371	52.85	-0.34	52.51	74.00	-21.49	Horizontal
2	1697.2122	44.60	1.17	45.77	74.00	-28.23	Horizontal
3	2355.2319	45.45	4.78	50.23	74.00	-23.77	Horizontal
4	2710.0263	40.81	6.53	47.34	74.00	-26.66	Horizontal
5	4829.1661	36.55	15.37	51.92	74.00	-22.08	Horizontal
6	5919.6775	34.17	18.67	52.84	74.00	-21.16	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

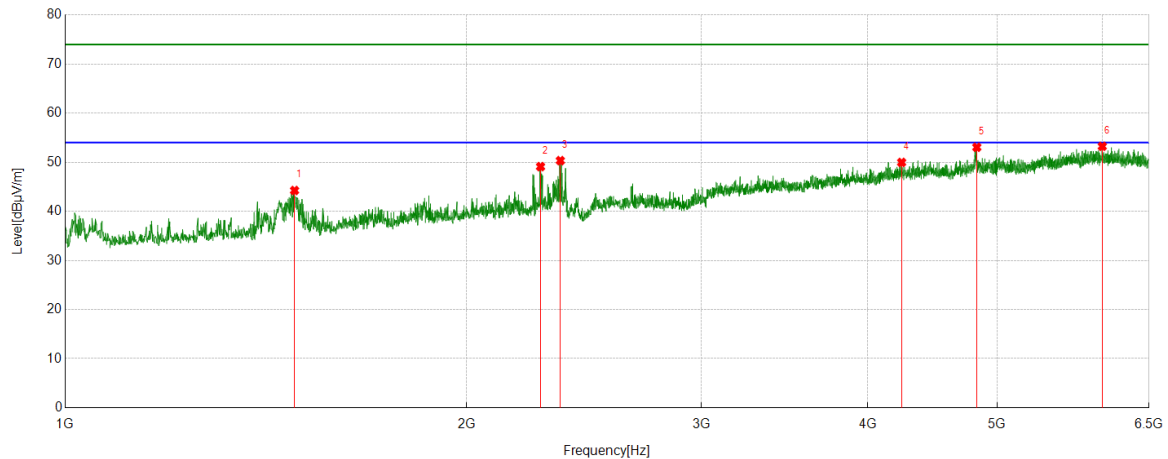


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1486.1233	44.51	-0.26	44.25	74.00	-29.75	Vertical
2	2272.7216	44.90	4.21	49.11	74.00	-24.89	Vertical
3	2351.7940	45.55	4.78	50.33	74.00	-23.67	Vertical
4	4239.9050	36.02	13.95	49.97	74.00	-24.03	Vertical
5	4827.7910	37.59	15.46	53.05	74.00	-20.95	Vertical
6	5995.9995	34.97	18.27	53.24	74.00	-20.76	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

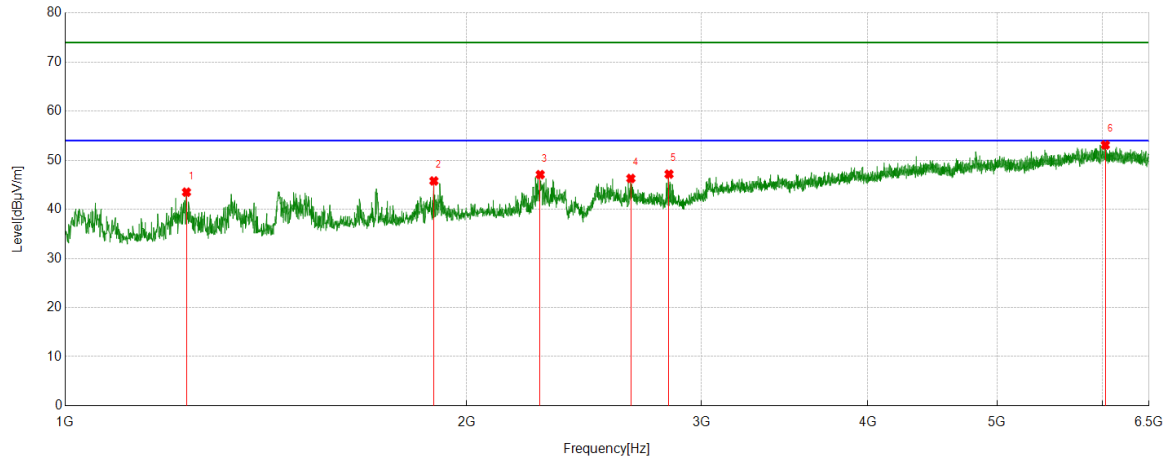


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1233.0916	45.41	-1.91	43.50	74.00	-30.50	Horizontal
2	1890.4238	43.23	2.55	45.78	74.00	-28.22	Horizontal
3	2271.3464	42.83	4.24	47.07	74.00	-26.93	Horizontal
4	2656.3945	40.10	6.19	46.29	74.00	-27.71	Horizontal
5	2837.2297	40.56	6.61	47.17	74.00	-26.83	Horizontal
6	6027.6285	35.17	17.94	53.11	74.00	-20.89	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

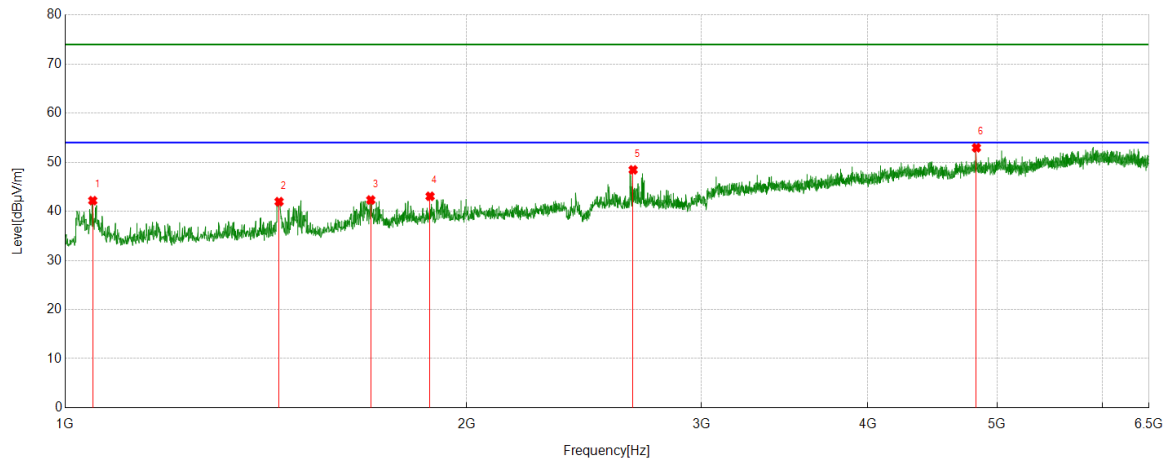


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1048.8186	43.67	-1.49	42.18	74.00	-31.82	Vertical
2	1446.9309	42.31	-0.34	41.97	74.00	-32.03	Vertical
3	1695.1494	41.05	1.26	42.31	74.00	-31.69	Vertical
4	1878.0473	40.96	2.10	43.06	74.00	-30.94	Vertical
5	2666.7083	42.29	6.16	48.45	74.00	-25.55	Vertical
6	4824.3530	37.28	15.67	52.95	74.00	-21.05	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

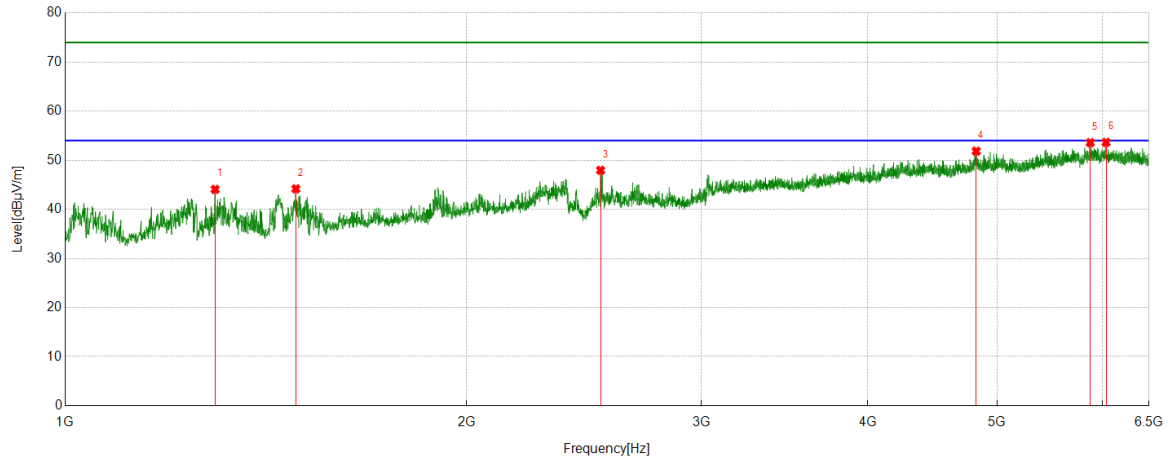


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1295.6620	45.37	-1.31	44.06	74.00	-29.94	Horizontal
2	1489.5612	44.54	-0.36	44.18	74.00	-29.82	Horizontal
3	2520.9401	42.27	5.68	47.95	74.00	-26.05	Horizontal
4	4822.9779	36.08	15.76	51.84	74.00	-22.16	Horizontal
5	5872.9216	35.73	17.85	53.58	74.00	-20.42	Horizontal
6	6035.1919	35.73	17.91	53.64	74.00	-20.36	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

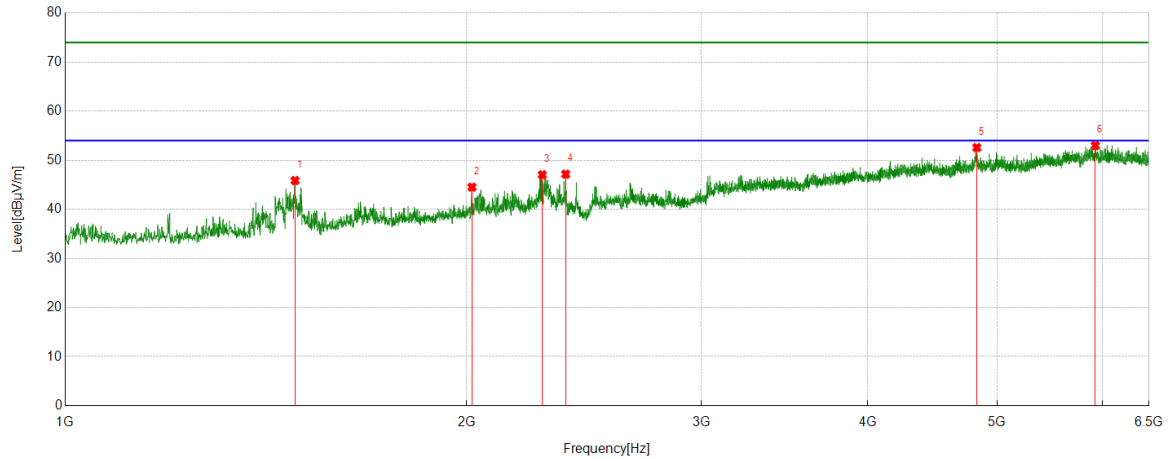


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1487.4984	46.16	-0.30	45.86	74.00	-28.14	Vertical
2	2019.0024	40.70	3.81	44.51	74.00	-29.49	Vertical
3	2279.5975	43.03	4.01	47.04	74.00	-26.96	Vertical
4	2373.7967	42.34	4.82	47.16	74.00	-26.84	Vertical
5	4827.7910	37.12	15.46	52.58	74.00	-21.42	Vertical
6	5924.4906	34.20	18.79	52.99	74.00	-21.01	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

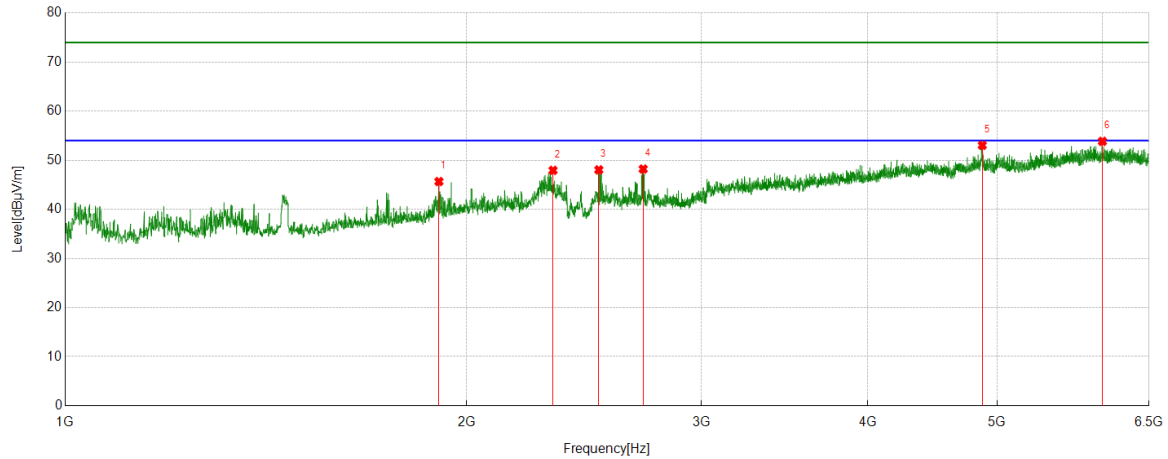


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1906.9259	42.60	3.06	45.66	74.00	-28.34	Horizontal
2	2322.2278	43.08	4.86	47.94	74.00	-26.06	Horizontal
3	2513.3767	42.20	5.84	48.04	74.00	-25.96	Horizontal
4	2713.4642	41.57	6.64	48.21	74.00	-25.79	Horizontal
5	4873.8592	37.96	15.08	53.04	74.00	-20.96	Horizontal
6	5997.3747	35.59	18.26	53.85	74.00	-20.15	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

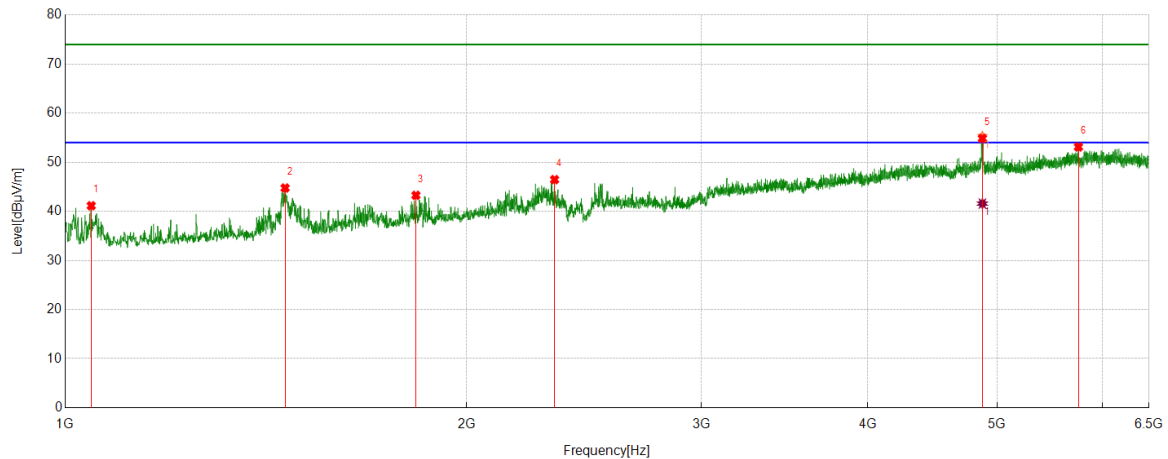

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1046.0683	42.62	-1.48	41.14	74.00	-32.86	Vertical
2	1462.0578	44.74	0.01	44.75	74.00	-29.25	Vertical
3	1832.6666	41.41	1.85	43.26	74.00	-30.74	Vertical
4	2328.4161	41.45	5.01	46.46	74.00	-27.54	Vertical
5	4874.5468	39.75	15.10	54.85	74.00	-19.15	Vertical
6	5753.9692	35.32	17.80	53.12	74.00	-20.88	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4874.5468	26.48	15.10	41.58	54.00	-12.42	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

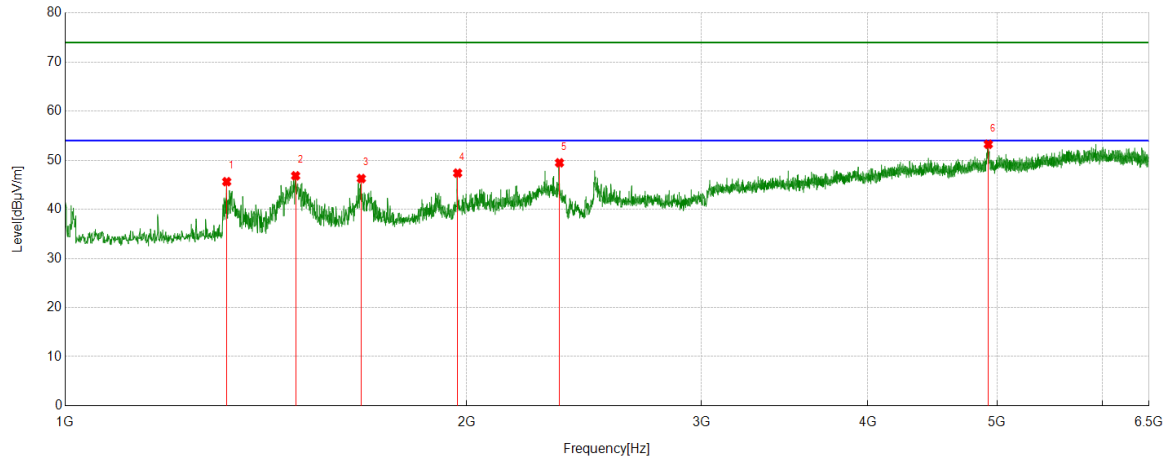


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1321.7902	46.86	-1.23	45.63	74.00	-28.37	Horizontal
2	1488.8736	47.17	-0.34	46.83	74.00	-27.17	Horizontal
3	1667.6460	44.96	1.31	46.27	74.00	-27.73	Horizontal
4	1969.4962	44.41	2.97	47.38	74.00	-26.62	Horizontal
5	2348.3560	44.67	4.81	49.48	74.00	-24.52	Horizontal
6	4924.7406	37.91	15.34	53.25	74.00	-20.75	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

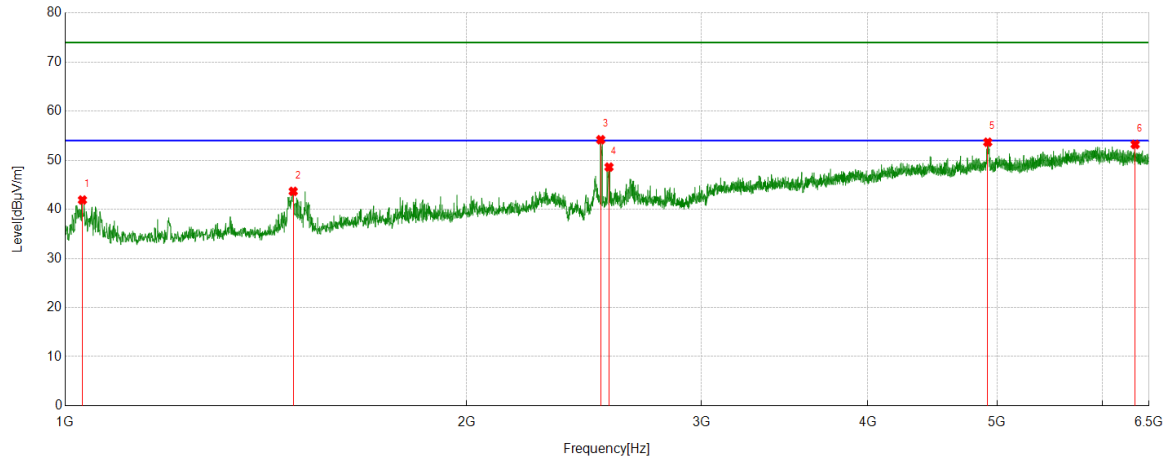


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1030.2538	43.44	-1.54	41.90	74.00	-32.10	Vertical
2	1482.6853	43.82	-0.16	43.66	74.00	-30.34	Vertical
3	2521.6277	48.51	5.67	54.18	74.00	-19.82	Vertical
4	2558.0698	42.99	5.61	48.60	74.00	-25.40	Vertical
5	4919.9275	38.31	15.36	53.67	74.00	-20.33	Vertical
6	6345.9807	34.15	19.07	53.22	74.00	-20.78	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

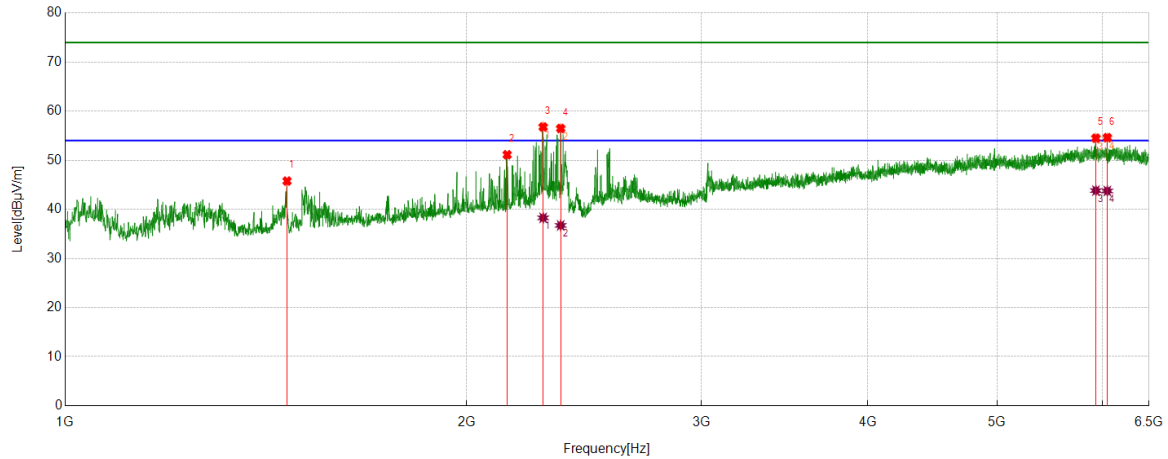

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1466.8709	45.95	-0.19	45.76	74.00	-28.24	Horizontal
2	2145.5182	47.31	3.81	51.12	74.00	-22.88	Horizontal
3	2283.0354	52.65	4.13	56.78	74.00	-17.22	Horizontal
4	2353.1691	51.71	4.77	56.48	74.00	-17.52	Horizontal
5	5929.9912	35.58	18.92	54.50	74.00	-19.50	Horizontal
6	6048.2560	36.55	18.06	54.61	74.00	-19.39	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2283.0354	34.13	4.13	38.26	54.00	-15.74	Horizontal
2	2353.1691	31.95	4.77	36.72	54.00	-17.28	Horizontal
3	5929.9912	24.90	18.92	43.82	54.00	-10.18	Horizontal
4	6048.2560	25.68	18.06	43.74	54.00	-10.26	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

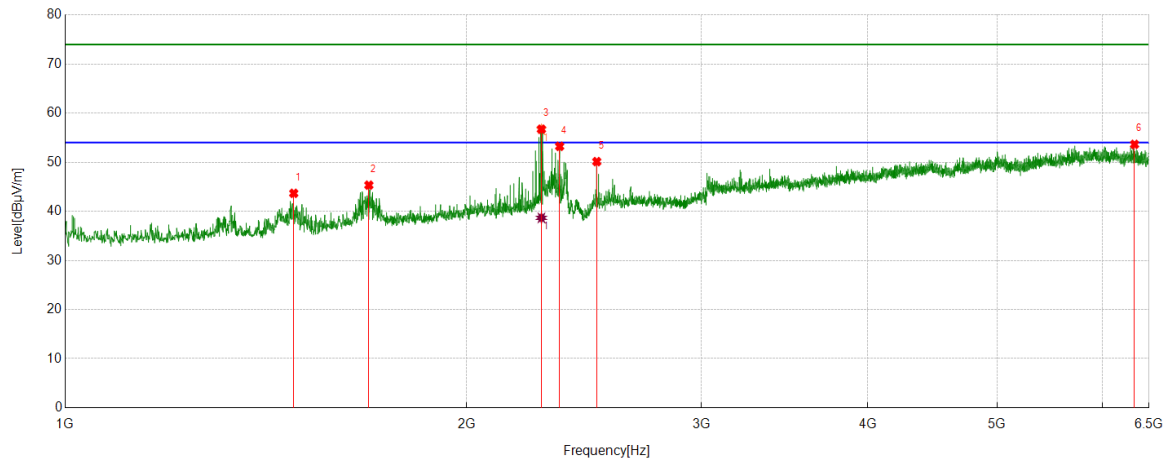

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1484.0605	43.87	-0.20	43.67	74.00	-30.33	Vertical
2	1689.6487	43.85	1.48	45.33	74.00	-28.67	Vertical
3	2276.1595	52.62	4.11	56.73	74.00	-17.27	Vertical
4	2349.0436	48.45	4.79	53.24	74.00	-20.76	Vertical
5	2504.4381	44.24	5.89	50.13	74.00	-23.87	Vertical
6	6339.1049	34.78	18.86	53.64	74.00	-20.36	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2276.1595	34.56	4.11	38.67	54.00	-15.33	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

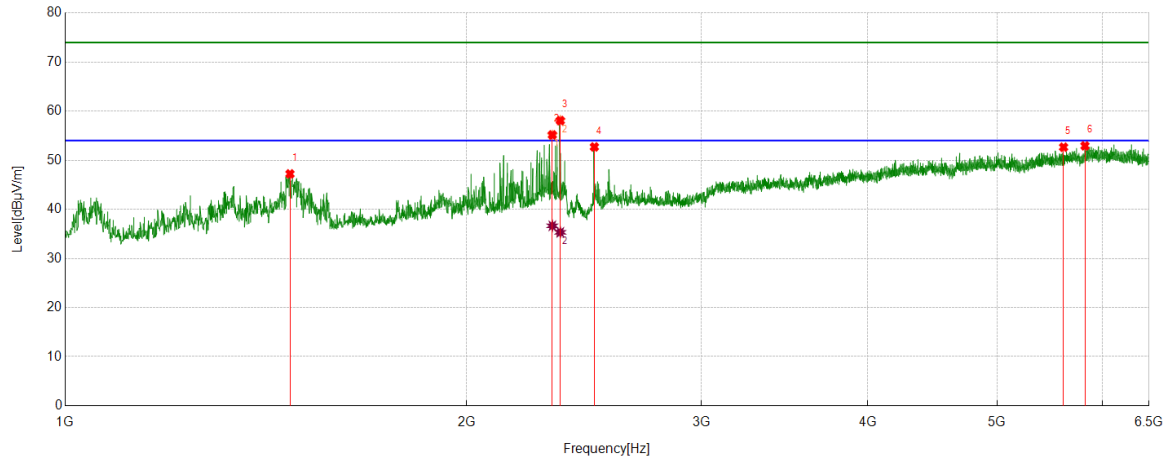

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1474.4343	47.43	-0.21	47.22	74.00	-26.78	Horizontal
2	2319.4774	50.37	4.79	55.16	74.00	-18.84	Horizontal
3	2351.7940	53.30	4.78	58.08	74.00	-15.92	Horizontal
4	2494.1243	46.88	5.83	52.71	74.00	-21.29	Horizontal
5	5608.2010	35.17	17.49	52.66	74.00	-21.34	Horizontal
6	5819.2899	34.31	18.62	52.93	74.00	-21.07	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2319.4774	31.85	4.79	36.64	54.00	-17.36	Horizontal
2	2351.7940	30.54	4.78	35.32	54.00	-18.68	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

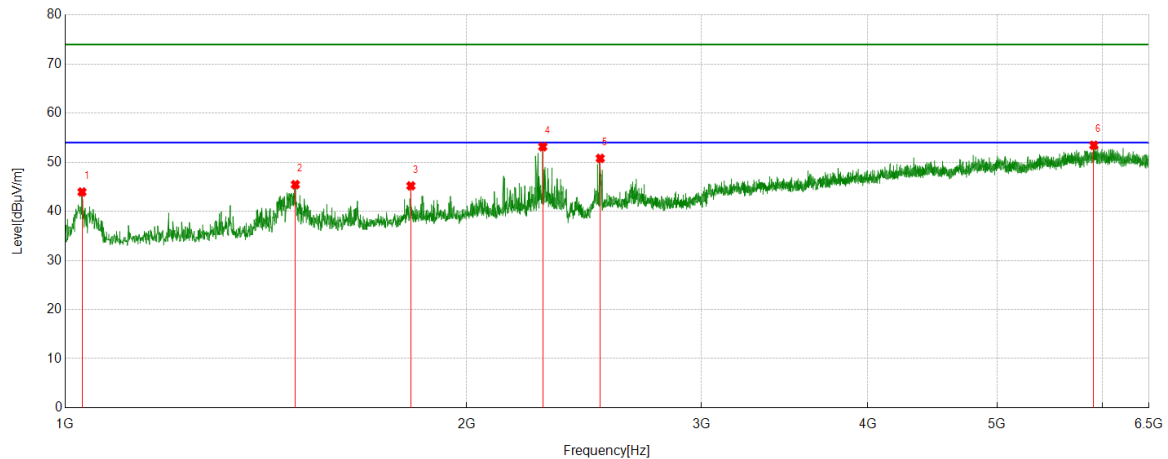


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1029.5662	45.49	-1.55	43.94	74.00	-30.06	Vertical
2	1488.1860	45.76	-0.32	45.44	74.00	-28.56	Vertical
3	1816.8521	43.08	2.11	45.19	74.00	-28.81	Vertical
4	2281.6602	49.10	4.06	53.16	74.00	-20.84	Vertical
5	2519.5649	45.08	5.71	50.79	74.00	-23.21	Vertical
6	5908.6761	35.30	18.15	53.45	74.00	-20.55	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

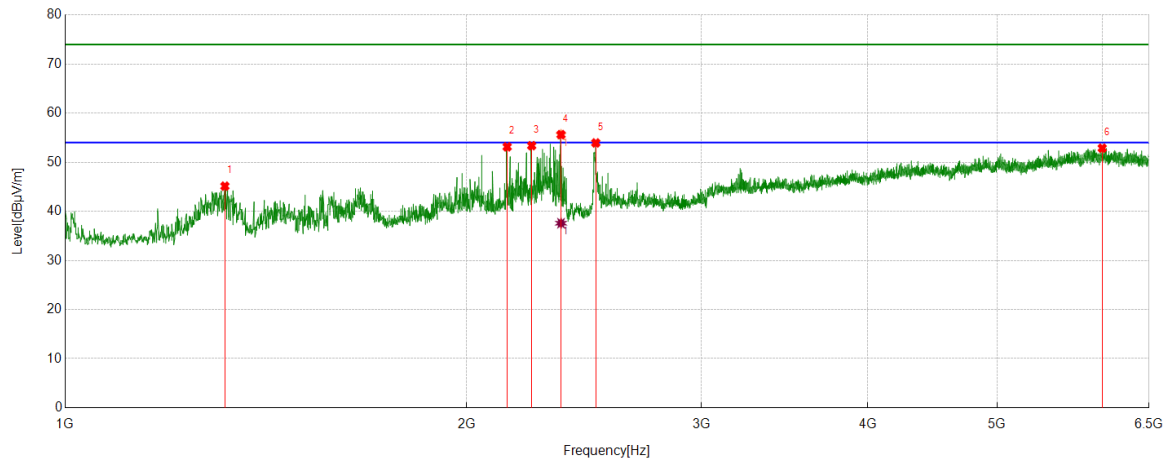

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1317.6647	46.40	-1.27	45.13	74.00	-28.87	Horizontal
2	2145.5182	49.33	3.81	53.14	74.00	-20.86	Horizontal
3	2238.3423	49.11	4.27	53.38	74.00	-20.62	Horizontal
4	2354.5443	50.85	4.77	55.62	74.00	-18.38	Horizontal
5	2500.3125	48.06	5.88	53.94	74.00	-20.06	Horizontal
6	5995.3119	34.59	18.28	52.87	74.00	-21.13	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2354.5443	32.81	4.77	37.58	54.00	-16.42	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

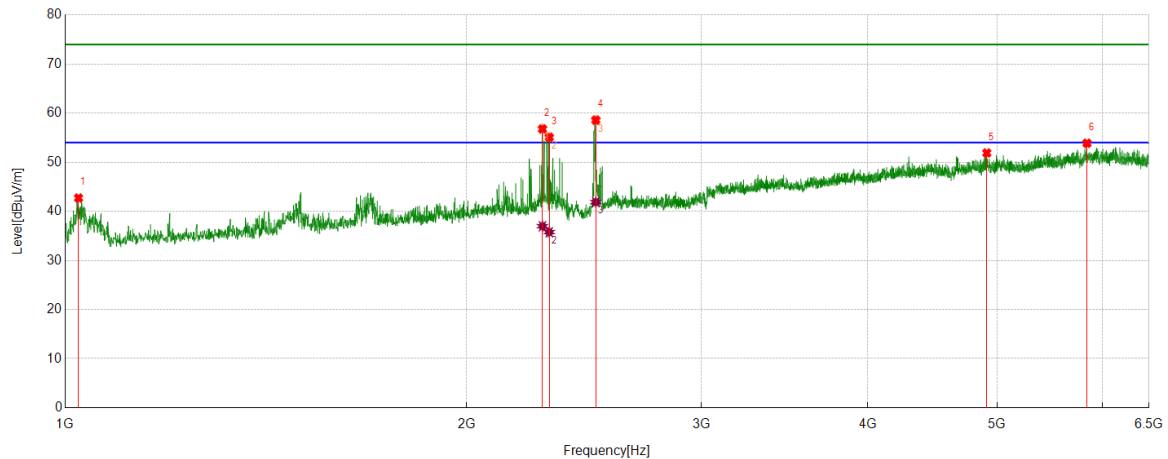

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1023.3779	44.38	-1.67	42.71	74.00	-31.29	Vertical
2	2280.2850	52.78	4.01	56.79	74.00	-17.21	Vertical
3	2307.1009	50.88	4.22	55.10	74.00	-18.90	Vertical
4	2500.3125	52.71	5.88	58.59	74.00	-15.41	Vertical
5	4911.6765	36.59	15.30	51.89	74.00	-22.11	Vertical
6	5839.2299	35.77	18.11	53.88	74.00	-20.12	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2280.2850	32.96	4.01	36.97	54.00	-17.03	Vertical
2	2307.1009	31.55	4.22	35.77	54.00	-18.23	Vertical
3	2500.3125	36.00	5.88	41.88	54.00	-12.12	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Horizontal	PASS

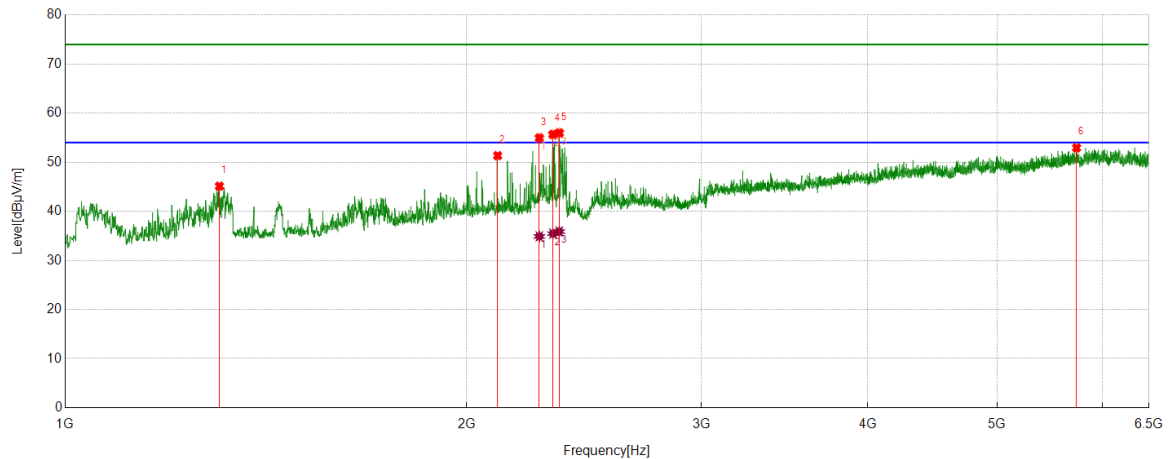

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1305.2882	46.46	-1.33	45.13	74.00	-28.87	Horizontal
2	2110.4513	47.89	3.46	51.35	74.00	-22.65	Horizontal
3	2267.9085	50.73	4.23	54.96	74.00	-19.04	Horizontal
4	2321.5402	50.82	4.85	55.67	74.00	-18.33	Horizontal
5	2347.6685	51.15	4.83	55.98	74.00	-18.02	Horizontal
6	5735.4044	35.32	17.61	52.93	74.00	-21.07	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2267.9085	30.66	4.23	34.89	54.00	-19.11	Horizontal
2	2321.5402	30.61	4.85	35.46	54.00	-18.54	Horizontal
3	2347.6685	31.05	4.83	35.88	54.00	-18.12	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Vertical	PASS

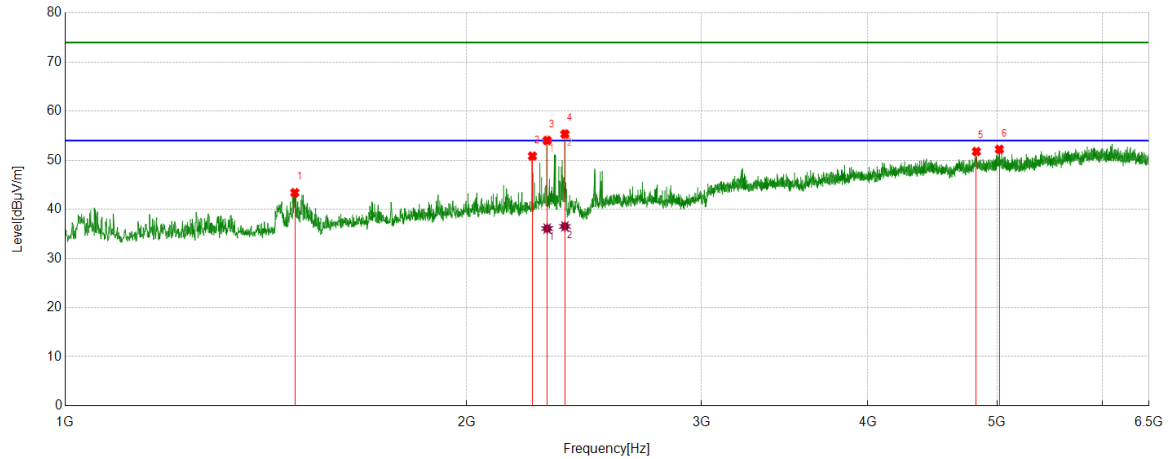

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1486.8109	43.67	-0.28	43.39	74.00	-30.61	Vertical
2	2241.0926	46.59	4.26	50.85	74.00	-23.15	Vertical
3	2298.8499	49.90	4.13	54.03	74.00	-19.97	Vertical
4	2370.3588	50.53	4.81	55.34	74.00	-18.66	Vertical
5	4824.3530	36.11	15.67	51.78	74.00	-22.22	Vertical
6	5019.6275	36.72	15.50	52.22	74.00	-21.78	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2298.8499	31.95	4.13	36.08	54.00	-17.92	Vertical
2	2370.3588	31.71	4.81	36.52	54.00	-17.48	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Horizontal	PASS

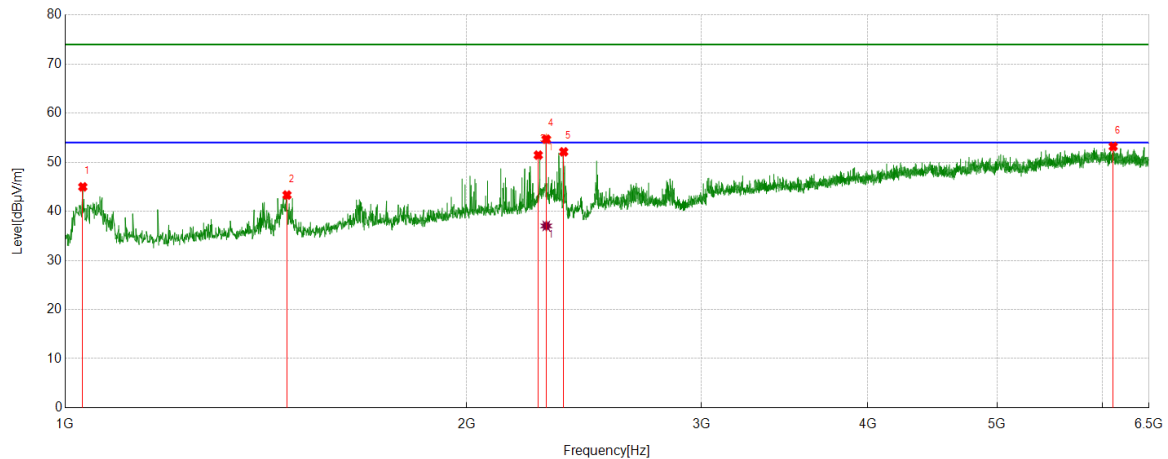

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1030.9414	46.51	-1.53	44.98	74.00	-29.02	Horizontal
2	1466.8709	43.51	-0.19	43.32	74.00	-30.68	Horizontal
3	2263.7830	47.32	4.13	51.45	74.00	-22.55	Horizontal
4	2295.4119	50.46	4.24	54.70	74.00	-19.30	Horizontal
5	2365.5457	47.32	4.80	52.12	74.00	-21.88	Horizontal
6	6110.1388	35.25	17.95	53.20	74.00	-20.80	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2295.4119	32.79	4.24	37.03	54.00	-16.97	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Vertical	PASS

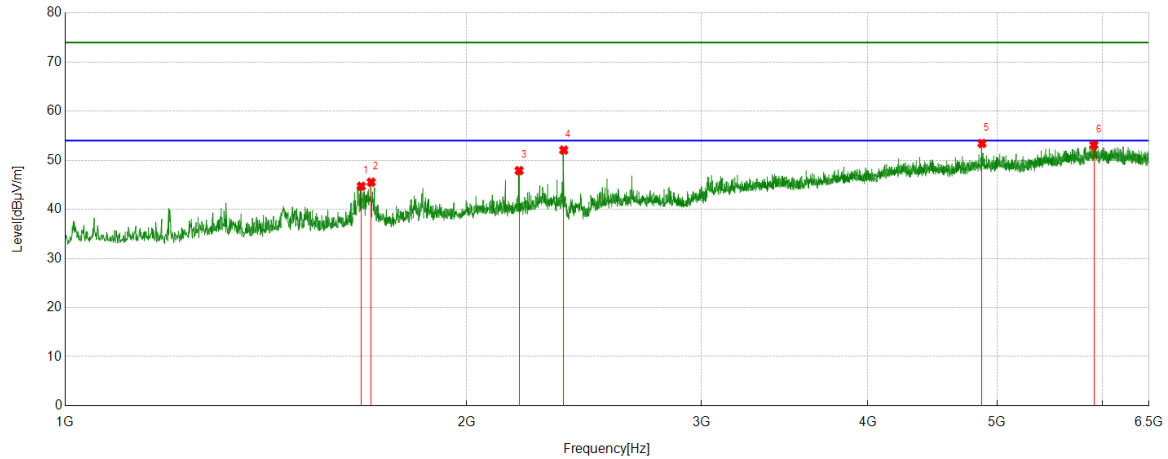


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1667.6460	43.39	1.31	44.70	74.00	-29.30	Vertical
2	1696.5246	44.34	1.20	45.54	74.00	-28.46	Vertical
3	2190.2113	43.86	4.02	47.88	74.00	-26.12	Vertical
4	2365.5457	47.27	4.80	52.07	74.00	-21.93	Vertical
5	4871.1089	38.39	15.03	53.42	74.00	-20.58	Vertical
6	5909.3637	34.93	18.17	53.10	74.00	-20.90	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Horizontal	PASS

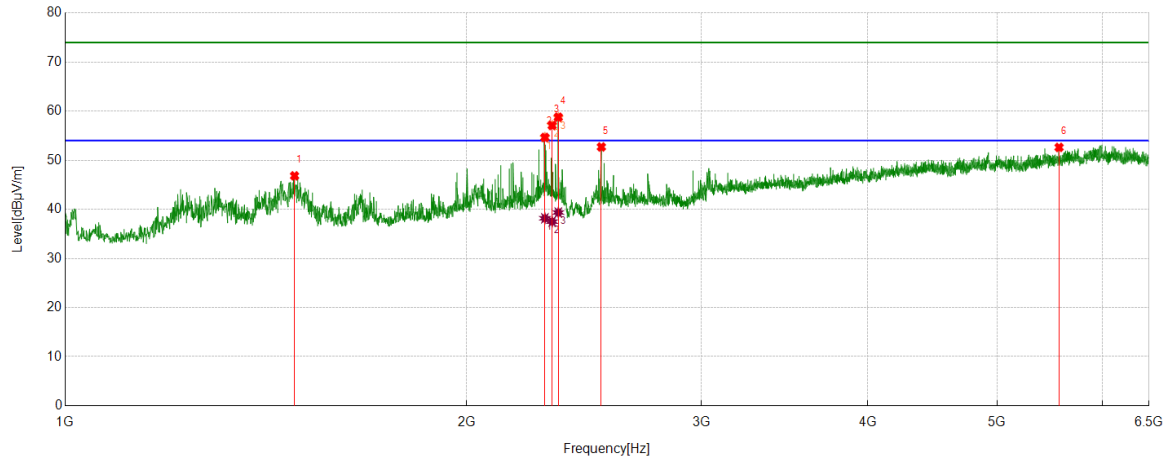

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1486.1233	47.08	-0.26	46.82	74.00	-27.18	Horizontal
2	2289.9112	50.24	4.41	54.65	74.00	-19.35	Horizontal
3	2318.7898	52.32	4.76	57.08	74.00	-16.92	Horizontal
4	2343.5429	53.86	4.91	58.77	74.00	-15.23	Horizontal
5	2524.3780	47.09	5.62	52.71	74.00	-21.29	Horizontal
6	5564.8831	35.49	17.13	52.62	74.00	-21.38	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2289.9112	33.76	4.41	38.17	54.00	-15.83	Horizontal
2	2318.7898	32.74	4.76	37.50	54.00	-16.50	Horizontal
3	2343.5429	34.44	4.91	39.35	54.00	-14.65	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Vertical	PASS

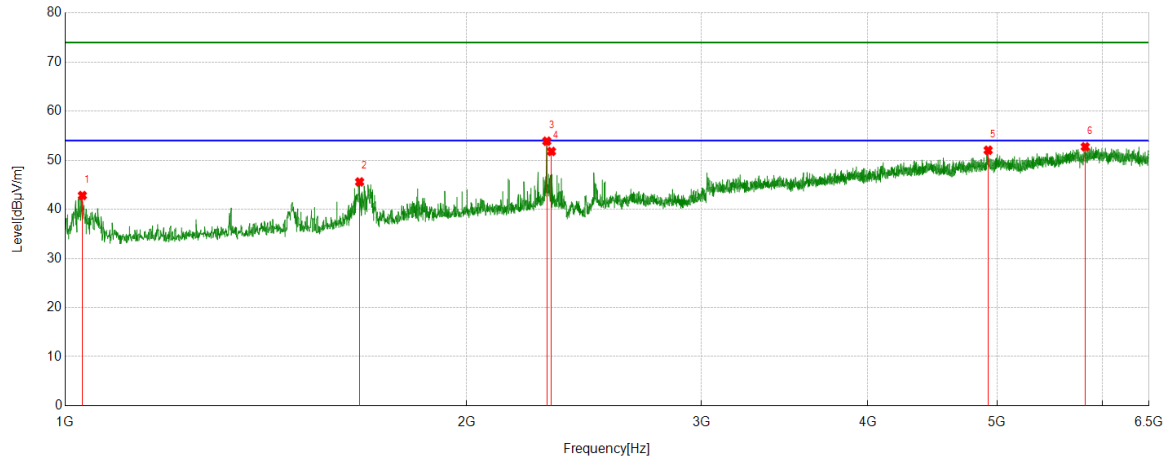


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1030.2538	44.35	-1.54	42.81	74.00	-31.19	Vertical
2	1662.8329	44.45	1.13	45.58	74.00	-28.42	Vertical
3	2297.4747	49.71	4.17	53.88	74.00	-20.12	Vertical
4	2316.0395	47.19	4.60	51.79	74.00	-22.21	Vertical
5	4923.3654	36.70	15.34	52.04	74.00	-21.96	Vertical
6	5822.0403	34.08	18.66	52.74	74.00	-21.26	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Horizontal	PASS

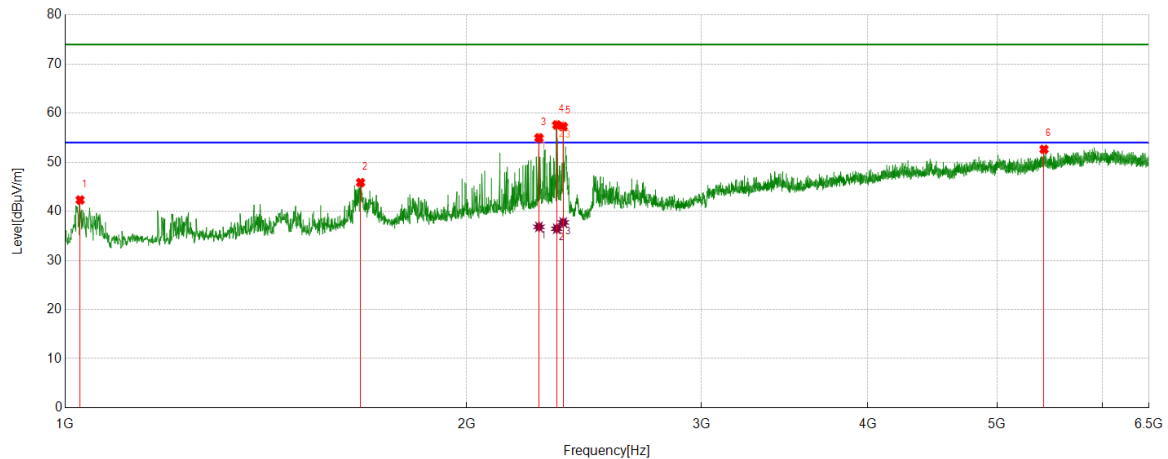

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1026.1283	43.93	-1.61	42.32	74.00	-31.68	Horizontal
2	1665.5832	44.62	1.24	45.86	74.00	-28.14	Horizontal
3	2266.5333	50.77	4.19	54.96	74.00	-19.04	Horizontal
4	2337.3547	52.60	5.00	57.60	74.00	-16.40	Horizontal
5	2363.4829	52.48	4.79	57.27	74.00	-16.73	Horizontal
6	5421.8652	35.43	17.20	52.63	74.00	-21.37	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2266.5333	32.65	4.19	36.84	54.00	-17.16	Horizontal
2	2337.3547	31.45	5.00	36.45	54.00	-17.55	Horizontal
3	2363.4829	32.95	4.79	37.74	54.00	-16.26	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Vertical	PASS

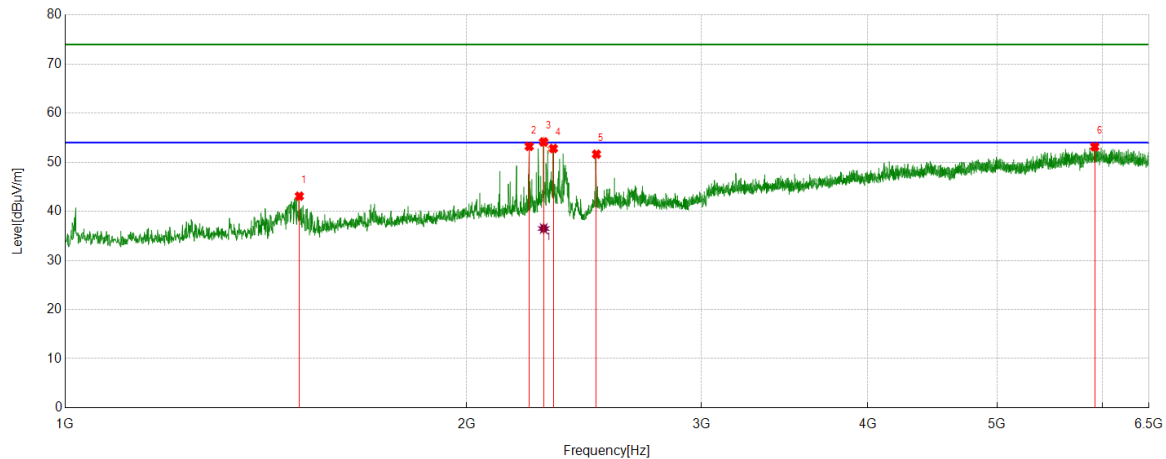

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1498.4998	43.42	-0.33	43.09	74.00	-30.91	Vertical
2	2228.7161	48.96	4.27	53.23	74.00	-20.77	Vertical
3	2285.0981	49.93	4.21	54.14	74.00	-19.86	Vertical
4	2323.6030	47.90	4.90	52.80	74.00	-21.20	Vertical
5	2503.0629	45.75	5.89	51.64	74.00	-22.36	Vertical
6	5918.3023	34.55	18.61	53.16	74.00	-20.84	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2285.0981	32.29	4.21	36.50	54.00	-17.50	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Horizontal	PASS

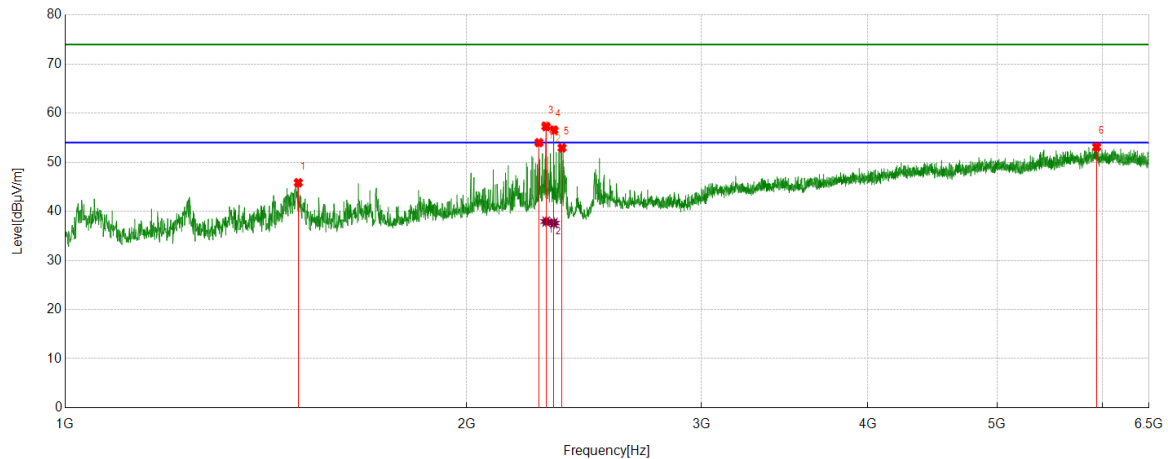

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1495.7495	46.17	-0.34	45.83	74.00	-28.17	Horizontal
2	2266.5333	49.80	4.19	53.99	74.00	-20.01	Horizontal
3	2294.7243	53.03	4.26	57.29	74.00	-16.71	Horizontal
4	2325.6657	51.60	4.94	56.54	74.00	-17.46	Horizontal
5	2358.6698	48.15	4.78	52.93	74.00	-21.07	Horizontal
6	5937.5547	34.57	18.55	53.12	74.00	-20.88	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2294.7243	33.66	4.26	37.92	54.00	-16.08	Horizontal
2	2325.6657	32.68	4.94	37.62	54.00	-16.38	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Vertical	PASS

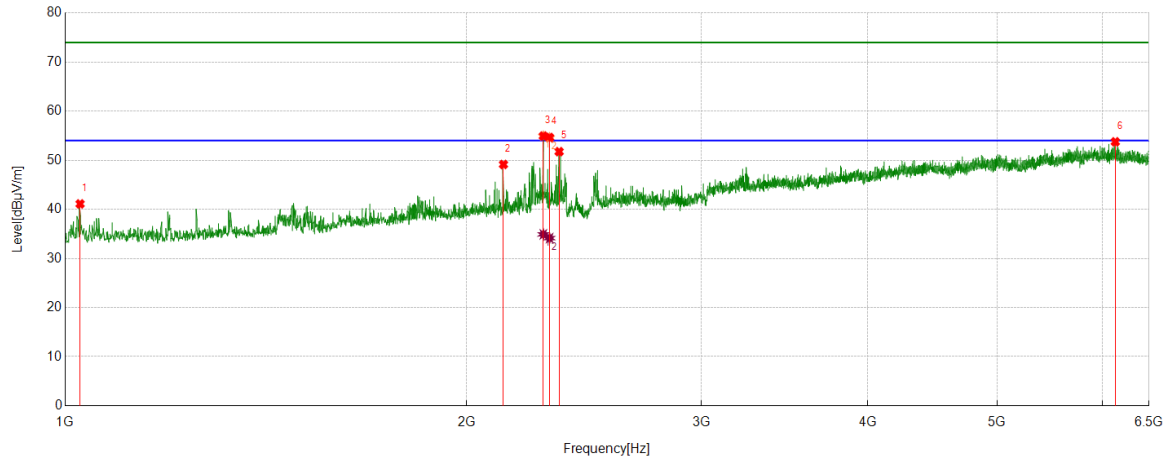

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1026.1283	42.72	-1.61	41.11	74.00	-32.89	Vertical
2	2131.7665	45.51	3.63	49.14	74.00	-24.86	Vertical
3	2283.7230	50.78	4.16	54.94	74.00	-19.06	Vertical
4	2308.4761	50.39	4.25	54.64	74.00	-19.36	Vertical
5	2346.9809	46.92	4.83	51.75	74.00	-22.25	Vertical
6	6132.1415	35.49	18.27	53.76	74.00	-20.24	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2283.7230	30.74	4.16	34.90	54.00	-19.10	Vertical
2	2308.4761	29.89	4.25	34.14	54.00	-19.86	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Horizontal	PASS

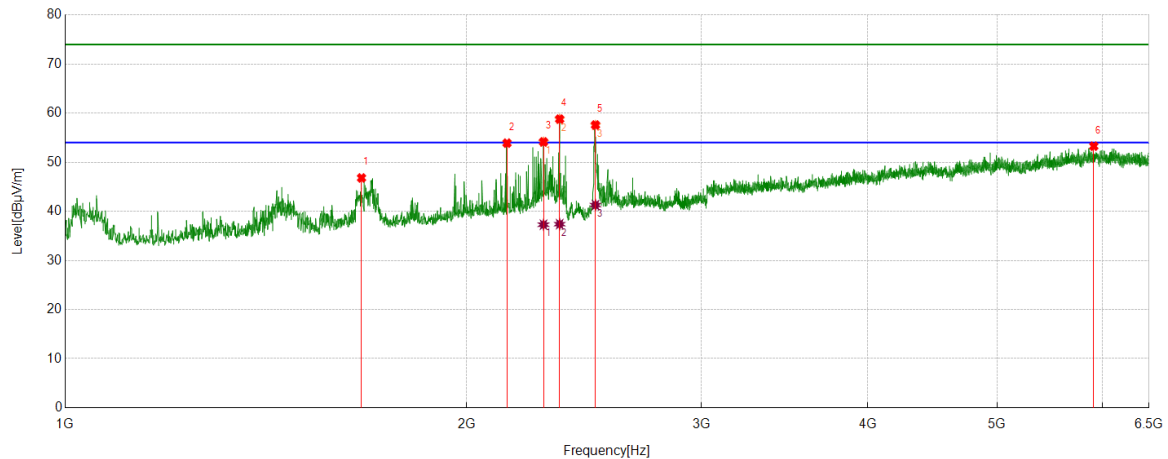

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1668.3335	45.46	1.34	46.80	74.00	-27.20	Horizontal
2	2144.8306	50.08	3.82	53.90	74.00	-20.10	Horizontal
3	2284.4106	49.97	4.18	54.15	74.00	-19.85	Horizontal
4	2349.0436	54.00	4.79	58.79	74.00	-15.21	Horizontal
5	2498.9374	51.72	5.87	57.59	74.00	-16.41	Horizontal
6	5908.6761	35.12	18.15	53.27	74.00	-20.73	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2284.4106	33.10	4.18	37.28	54.00	-16.72	Horizontal
2	2349.0436	32.60	4.79	37.39	54.00	-16.61	Horizontal
3	2498.9374	35.41	5.87	41.28	54.00	-12.72	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Vertical	PASS

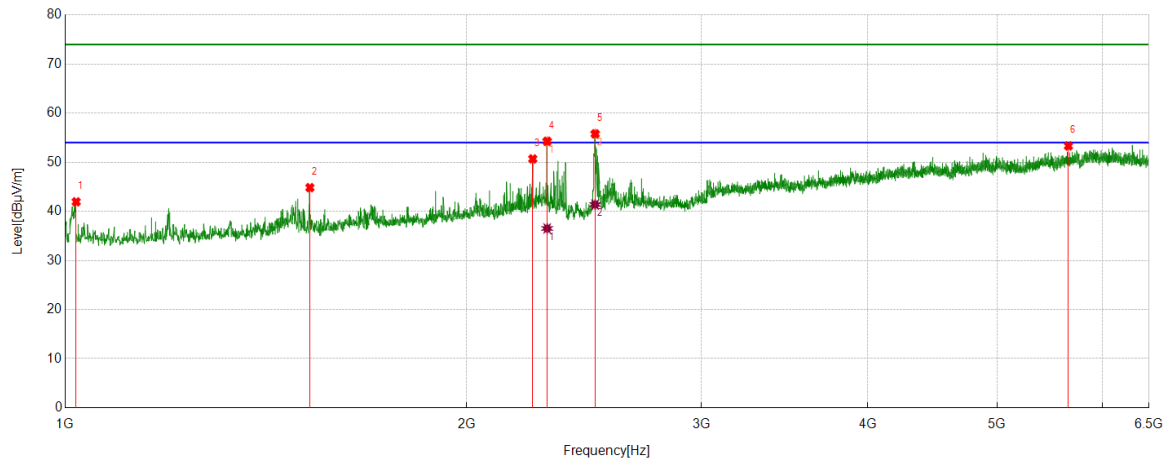

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1019.2524	43.66	-1.72	41.94	74.00	-32.06	Vertical
2	1526.0032	45.36	-0.53	44.83	74.00	-29.17	Vertical
3	2242.4678	46.42	4.26	50.68	74.00	-23.32	Vertical
4	2298.8499	50.14	4.13	54.27	74.00	-19.73	Vertical
5	2497.5622	49.92	5.87	55.79	74.00	-18.21	Vertical
6	5655.6445	35.82	17.50	53.32	74.00	-20.68	Vertical

AV Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2298.8499	32.38	4.13	36.51	54.00	-17.49	Vertical
2	2497.5622	35.51	5.87	41.38	54.00	-12.62	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 2: 6.5GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

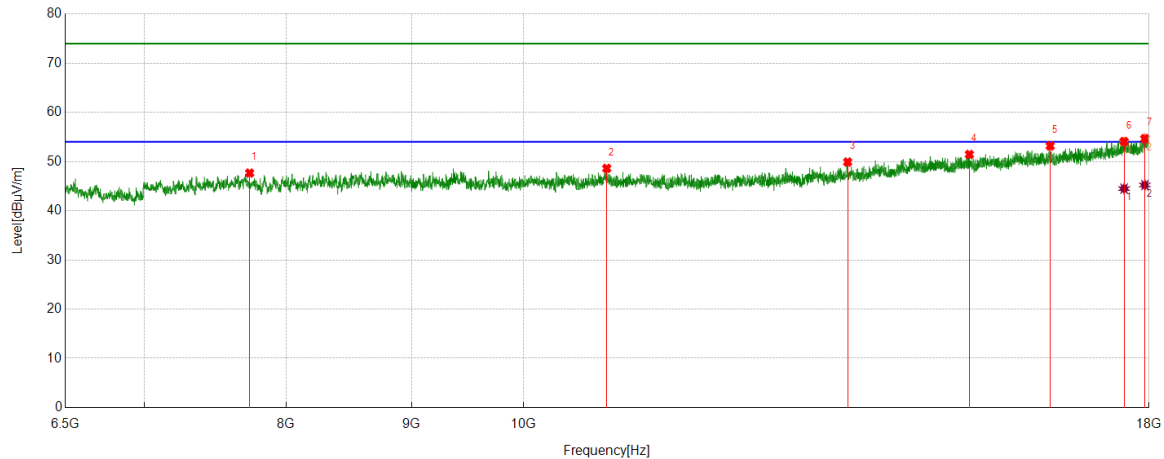

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7730.6538	42.19	5.48	47.67	74.00	-26.33	Horizontal
2	10813.0391	41.73	6.89	48.62	74.00	-25.38	Horizontal
3	13560.4451	39.00	10.91	49.91	74.00	-24.09	Horizontal
4	15203.7130	38.02	13.43	51.45	74.00	-22.55	Horizontal
5	16402.7378	38.16	15.04	53.20	74.00	-20.80	Horizontal
6	17583.0729	36.09	17.98	54.07	74.00	-19.93	Horizontal
7	17929.5537	35.30	19.37	54.67	74.00	-19.33	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17583.0729	26.52	17.98	44.50	54.00	-9.50	Horizontal
2	17929.5537	25.86	19.37	45.23	54.00	-8.77	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

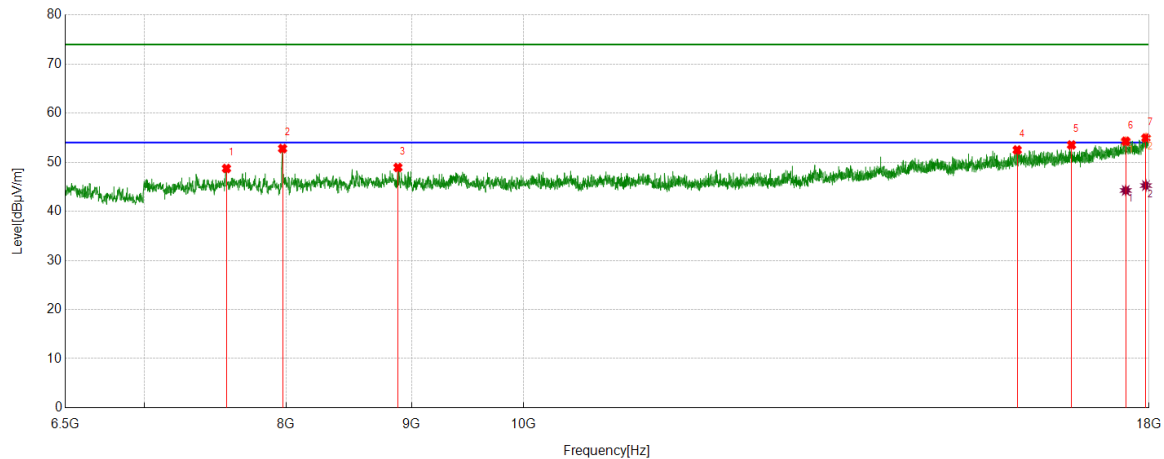

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7563.8830	44.08	4.65	48.73	74.00	-25.27	Vertical
2	7973.6217	47.40	5.39	52.79	74.00	-21.21	Vertical
3	8886.5483	42.72	6.21	48.93	74.00	-25.07	Vertical
4	15902.4253	37.87	14.63	52.50	74.00	-21.50	Vertical
5	16734.8419	37.49	16.03	53.52	74.00	-20.48	Vertical
6	17610.3888	36.22	18.06	54.28	74.00	-19.72	Vertical
7	17948.2435	35.46	19.48	54.94	74.00	-19.06	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17610.3888	26.20	18.06	44.26	54.00	-9.74	Vertical
2	17948.2435	25.77	19.48	45.25	54.00	-8.75	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

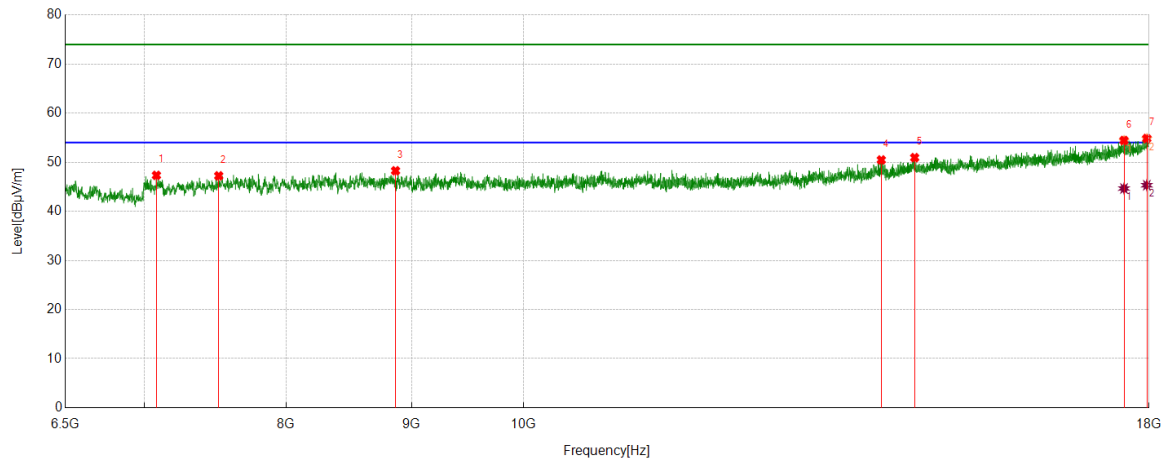

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7082.2603	43.53	3.80	47.33	74.00	-26.67	Horizontal
2	7509.2512	42.82	4.41	47.23	74.00	-26.77	Horizontal
3	8866.4208	41.98	6.28	48.26	74.00	-25.74	Horizontal
4	13996.0620	38.77	11.70	50.47	74.00	-23.53	Horizontal
5	14441.7427	38.06	12.88	50.94	74.00	-23.06	Horizontal
6	17581.6352	36.48	17.96	54.44	74.00	-19.56	Horizontal
7	17962.6203	35.21	19.63	54.84	74.00	-19.16	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17581.6352	26.69	17.96	44.65	54.00	-9.35	Horizontal
2	17962.6203	25.69	19.63	45.32	54.00	-8.68	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

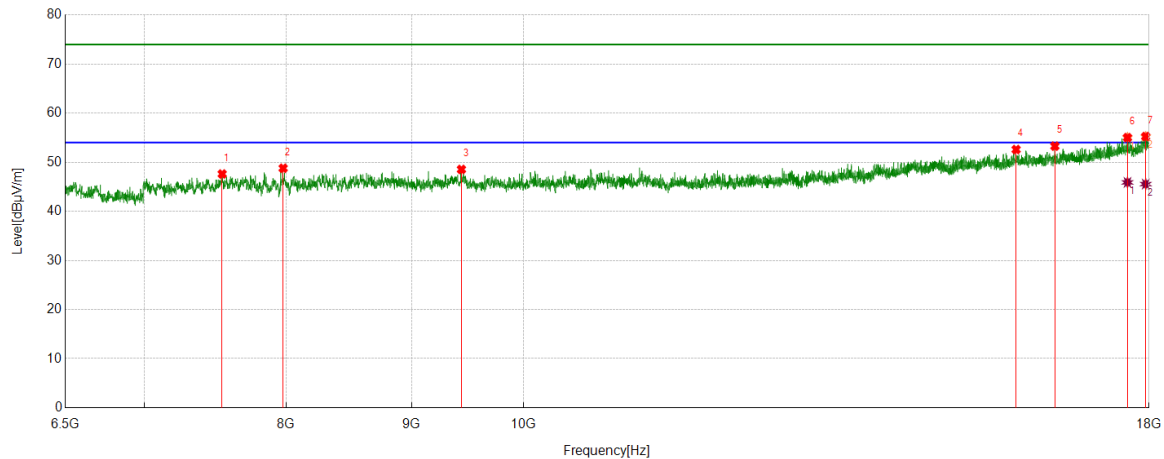

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7533.6917	43.17	4.44	47.61	74.00	-26.39	Vertical
2	7977.9347	43.41	5.37	48.78	74.00	-25.22	Vertical
3	9432.8666	41.94	6.60	48.54	74.00	-25.46	Vertical
4	15886.6108	37.98	14.61	52.59	74.00	-21.41	Vertical
5	16476.0595	37.49	15.79	53.28	74.00	-20.72	Vertical
6	17639.1424	37.01	18.01	55.02	74.00	-18.98	Vertical
7	17943.9305	35.79	19.46	55.25	74.00	-18.75	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17639.1424	27.88	18.01	45.89	54.00	-8.11	Vertical
2	17943.9305	26.09	19.46	45.55	54.00	-8.45	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

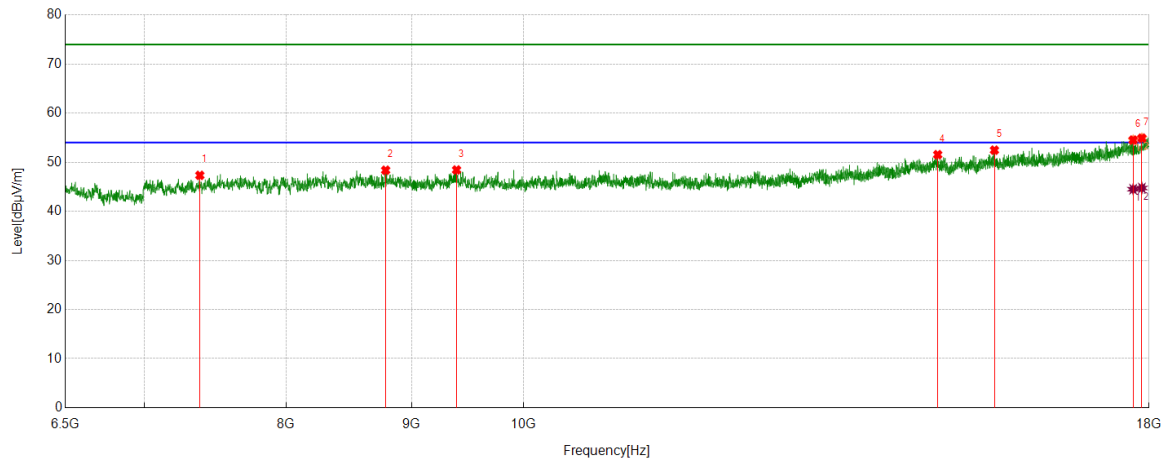

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7376.9846	43.10	4.23	47.33	74.00	-26.67	Horizontal
2	8784.4731	42.18	6.19	48.37	74.00	-25.63	Horizontal
3	9389.7362	41.88	6.55	48.43	74.00	-25.57	Horizontal
4	14758.0323	38.61	12.94	51.55	74.00	-22.45	Horizontal
5	15566.0083	38.81	13.65	52.46	74.00	-21.54	Horizontal
6	17732.5916	35.98	18.54	54.52	74.00	-19.48	Horizontal
7	17879.2349	35.73	19.18	54.91	74.00	-19.09	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17732.5916	25.96	18.54	44.50	54.00	-9.50	Horizontal
2	17879.2349	25.57	19.18	44.75	54.00	-9.25	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

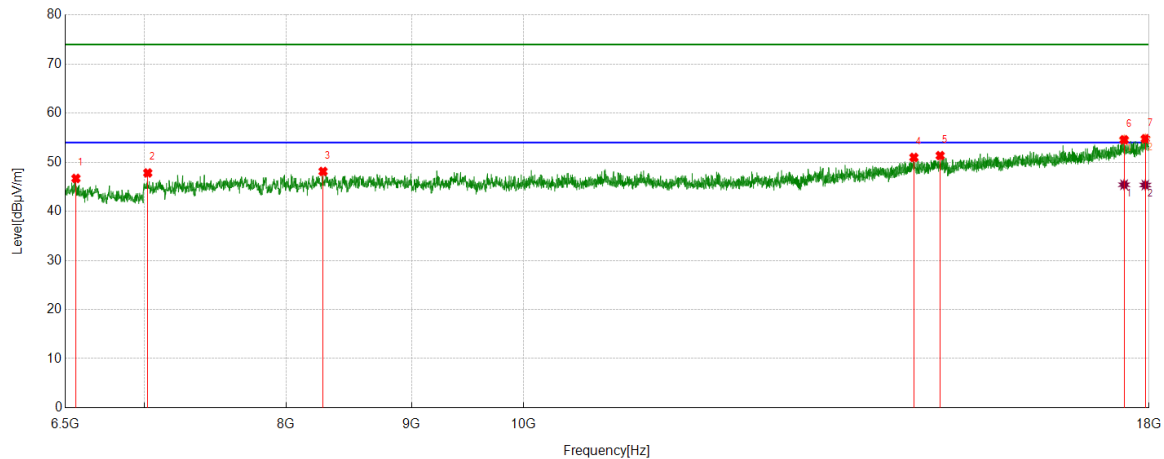

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6566.1333	43.32	3.38	46.70	74.00	-27.30	Vertical
2	7024.7531	44.12	3.70	47.82	74.00	-26.18	Vertical
3	8282.7228	41.78	6.34	48.12	74.00	-25.88	Vertical
4	14431.6790	38.11	12.87	50.98	74.00	-23.02	Vertical
5	14792.5366	38.49	12.86	51.35	74.00	-22.65	Vertical
6	17583.0729	36.60	17.98	54.58	74.00	-19.42	Vertical
7	17938.1798	35.36	19.43	54.79	74.00	-19.21	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17583.0729	27.44	17.98	45.42	54.00	-8.58	Vertical
2	17938.1798	25.93	19.43	45.36	54.00	-8.64	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

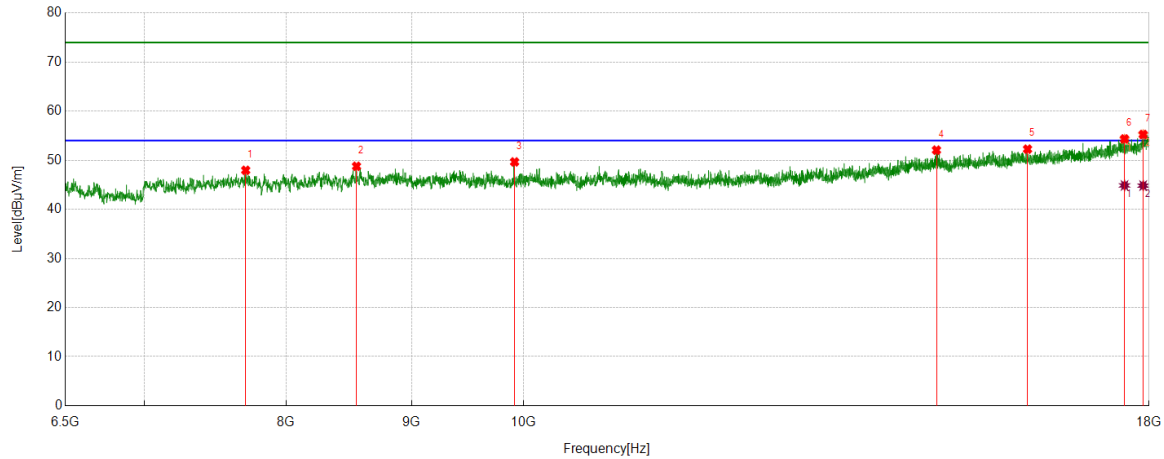

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7701.9002	42.41	5.54	47.95	74.00	-26.05	Horizontal
2	8547.2559	42.37	6.40	48.77	74.00	-25.23	Horizontal
3	9915.9270	43.07	6.59	49.66	74.00	-24.34	Horizontal
4	14740.7801	39.16	12.90	52.06	74.00	-21.94	Horizontal
5	16057.6947	37.74	14.52	52.26	74.00	-21.74	Horizontal
6	17590.2613	36.30	18.04	54.34	74.00	-19.66	Horizontal
7	17900.8001	36.07	19.18	55.25	74.00	-18.75	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17590.2613	26.83	18.04	44.87	54.00	-9.13	Horizontal
2	17900.8001	25.65	19.18	44.83	54.00	-9.17	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

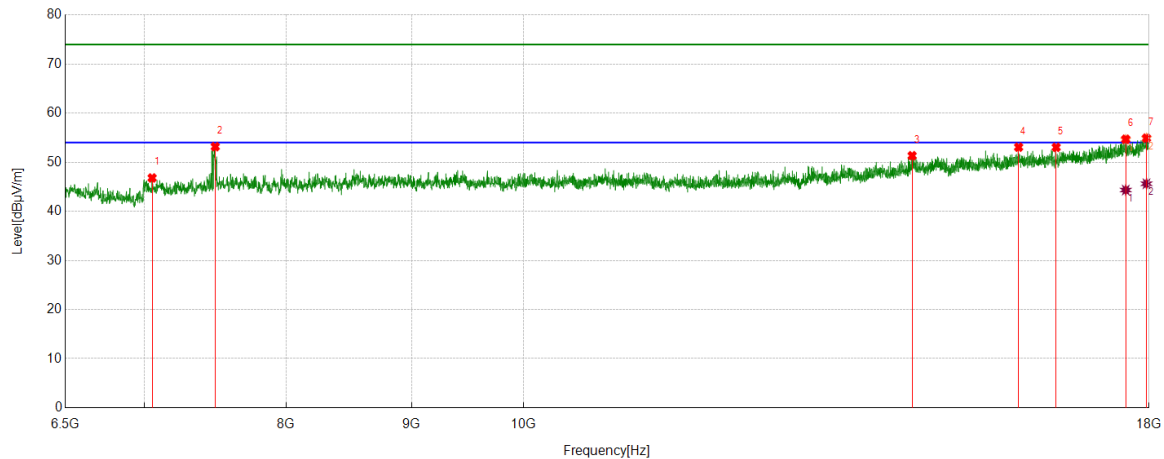

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7053.5067	43.01	3.79	46.80	74.00	-27.20	Vertical
2	7484.8106	48.69	4.48	53.17	74.00	-20.83	Vertical
3	14407.2384	38.48	12.85	51.33	74.00	-22.67	Vertical
4	15923.9905	38.55	14.52	53.07	74.00	-20.93	Vertical
5	16496.1870	37.25	15.79	53.04	74.00	-20.96	Vertical
6	17610.3888	36.62	18.06	54.68	74.00	-19.32	Vertical
7	17956.8696	35.32	19.59	54.91	74.00	-19.09	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17610.3888	26.27	18.06	44.33	54.00	-9.67	Vertical
2	17956.8696	26.03	19.59	45.62	54.00	-8.38	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

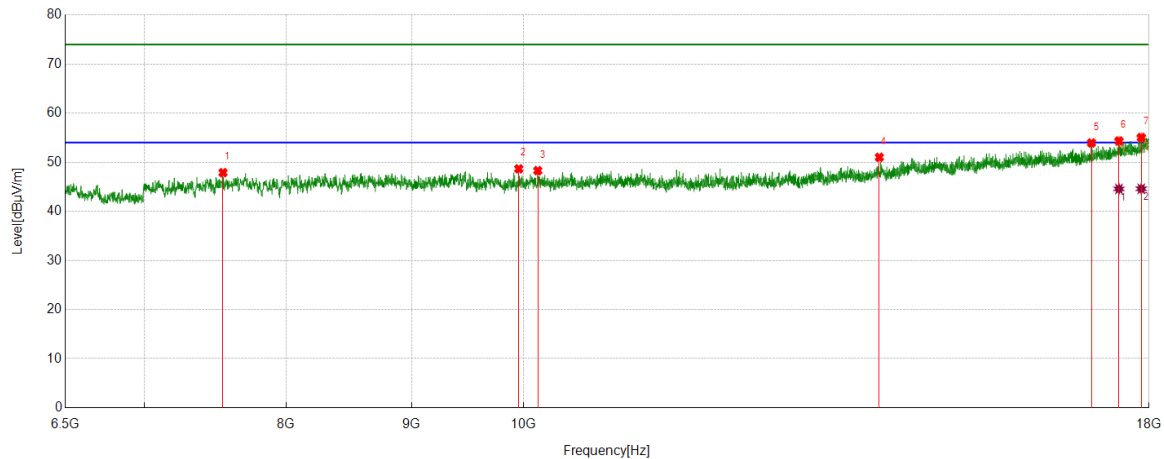

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7539.4424	43.31	4.57	47.88	74.00	-26.12	Horizontal
2	9954.7443	42.03	6.63	48.66	74.00	-25.34	Horizontal
3	10134.4543	41.66	6.63	48.29	74.00	-25.71	Horizontal
4	13970.1838	39.51	11.50	51.01	74.00	-22.99	Horizontal
5	17052.5691	37.70	16.24	53.94	74.00	-20.06	Horizontal
6	17498.2498	36.70	17.63	54.33	74.00	-19.67	Horizontal
7	17869.1711	35.83	19.21	55.04	74.00	-18.96	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17498.2498	26.94	17.63	44.57	54.00	-9.43	Horizontal
2	17869.1711	25.38	19.21	44.59	54.00	-9.41	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

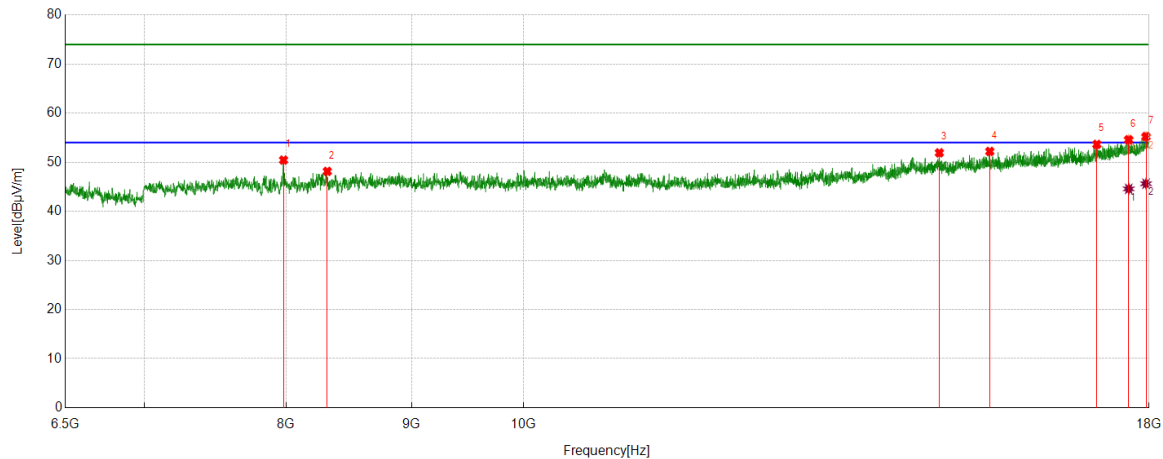

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7980.8101	45.06	5.38	50.44	74.00	-23.56	Vertical
2	8315.7895	42.06	6.08	48.14	74.00	-25.86	Vertical
3	14781.0351	39.08	12.84	51.92	74.00	-22.08	Vertical
4	15498.4373	38.27	13.93	52.20	74.00	-21.80	Vertical
5	17138.8299	37.23	16.41	53.64	74.00	-20.36	Vertical
6	17659.2699	36.52	18.07	54.59	74.00	-19.41	Vertical
7	17949.6812	35.74	19.49	55.23	74.00	-18.77	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17659.2699	26.51	18.07	44.58	54.00	-9.42	Vertical
2	17949.6812	26.14	19.49	45.63	54.00	-8.37	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

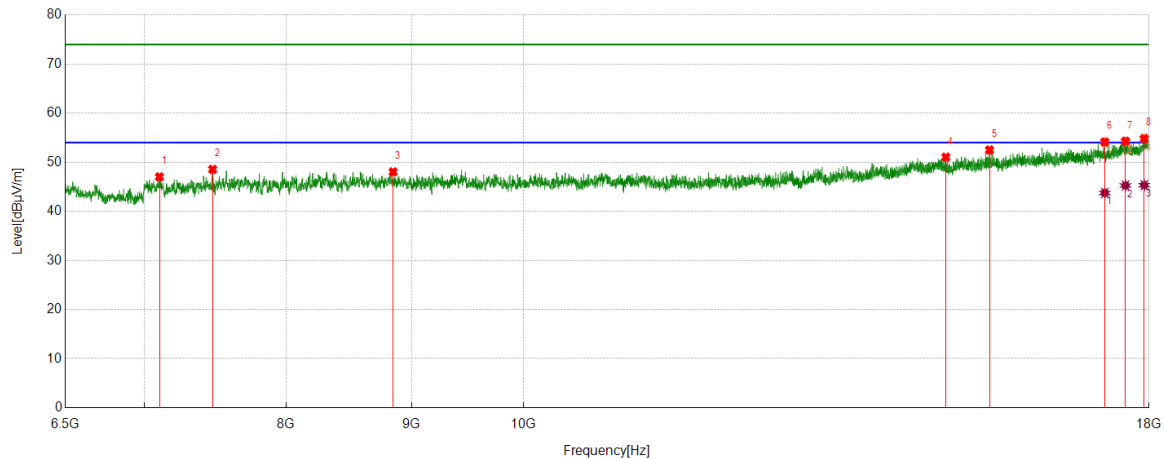

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7102.3878	43.12	3.90	47.02	74.00	-26.98	Horizontal
2	7466.1208	44.20	4.34	48.54	74.00	-25.46	Horizontal
3	8846.2933	41.78	6.25	48.03	74.00	-25.97	Horizontal
4	14871.6090	38.20	12.83	51.03	74.00	-22.97	Horizontal
5	15494.1243	38.54	13.96	52.50	74.00	-21.50	Horizontal
6	17266.7833	37.26	16.87	54.13	74.00	-19.87	Horizontal
7	17606.0758	36.22	18.05	54.27	74.00	-19.73	Horizontal
8	17919.4899	35.46	19.36	54.82	74.00	-19.18	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17266.7833	26.87	16.87	43.74	54.00	-10.26	Horizontal
2	17606.0758	27.21	18.05	45.26	54.00	-8.74	Horizontal
3	17919.4899	25.97	19.36	45.33	54.00	-8.67	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

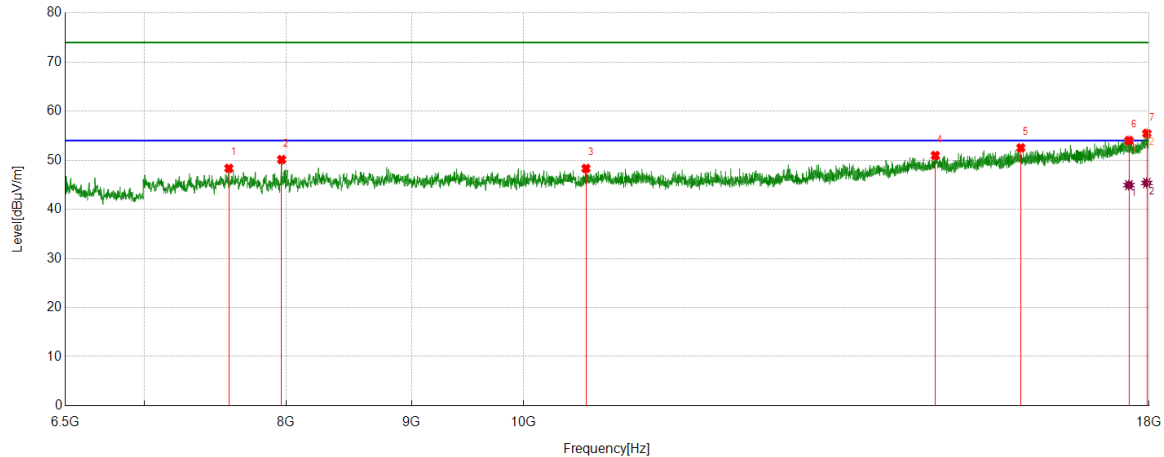

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7581.1351	43.57	4.78	48.35	74.00	-25.65	Vertical
2	7966.4333	44.54	5.59	50.13	74.00	-23.87	Vertical
3	10604.5756	41.28	7.04	48.32	74.00	-25.68	Vertical
4	14724.9656	38.16	12.81	50.97	74.00	-23.03	Vertical
5	15957.0571	38.00	14.53	52.53	74.00	-21.47	Vertical
6	17663.5829	35.94	18.07	54.01	74.00	-19.99	Vertical
7	17962.6203	35.82	19.63	55.45	74.00	-18.55	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17663.5829	26.86	18.07	44.93	54.00	-9.07	Vertical
2	17962.6203	25.75	19.63	45.38	54.00	-8.62	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

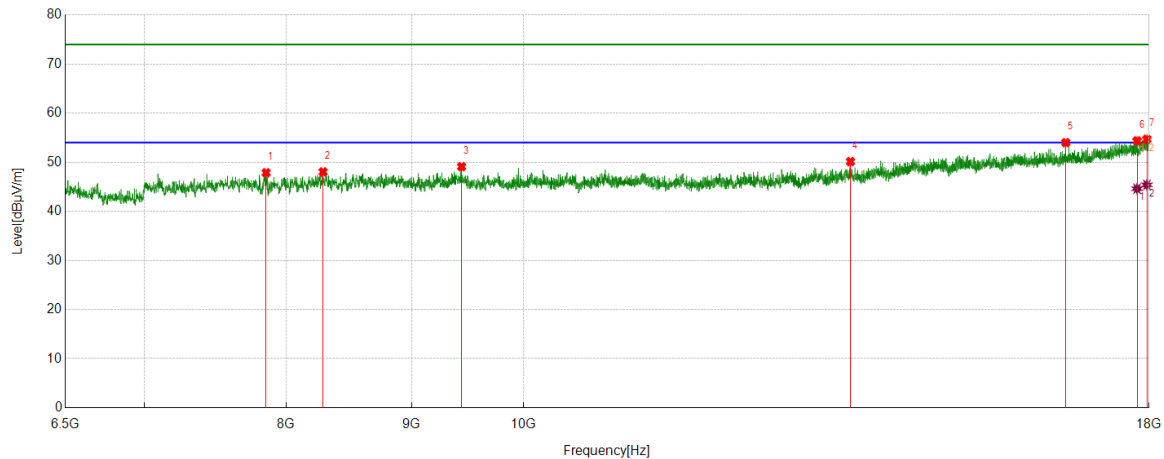

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7851.4189	42.46	5.40	47.86	74.00	-26.14	Horizontal
2	8282.7228	41.69	6.34	48.03	74.00	-25.97	Horizontal
3	9434.3043	42.50	6.60	49.10	74.00	-24.90	Horizontal
4	13596.3870	39.48	10.65	50.13	74.00	-23.87	Horizontal
5	16645.7057	38.22	15.78	54.00	74.00	-20.00	Horizontal
6	17798.7248	35.52	18.82	54.34	74.00	-19.66	Horizontal
7	17964.0580	35.06	19.63	54.69	74.00	-19.31	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17798.7248	25.79	18.82	44.61	54.00	-9.39	Horizontal
2	17964.0580	25.76	19.63	45.39	54.00	-8.61	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

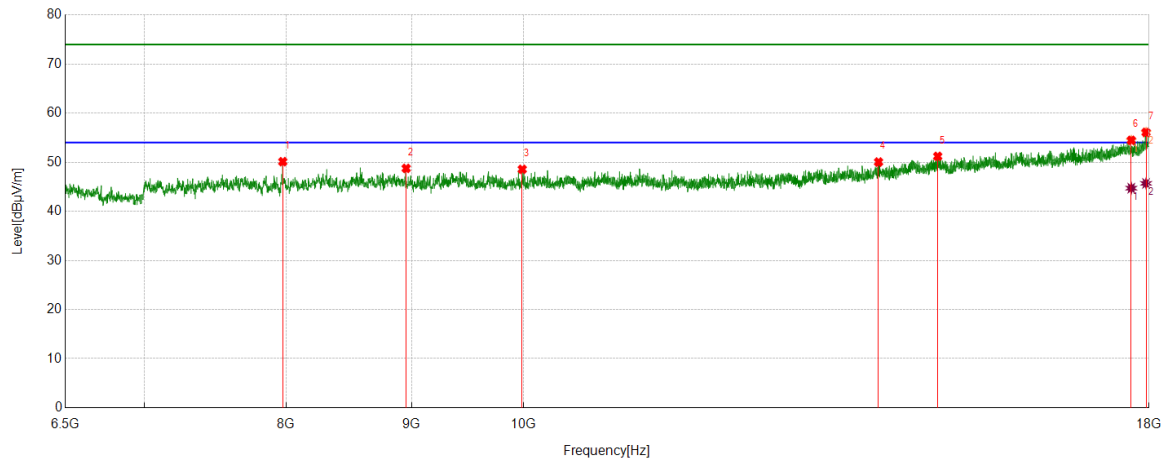

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7975.0594	44.74	5.38	50.12	74.00	-23.88	Vertical
2	8955.5569	42.54	6.21	48.75	74.00	-25.25	Vertical
3	9987.8110	41.94	6.62	48.56	74.00	-25.44	Vertical
4	13960.1200	38.55	11.49	50.04	74.00	-23.96	Vertical
5	14758.0323	38.27	12.94	51.21	74.00	-22.79	Vertical
6	17702.4003	36.18	18.29	54.47	74.00	-19.53	Vertical
7	17949.6812	36.60	19.49	56.09	74.00	-17.91	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17702.4003	26.43	18.29	44.72	54.00	-9.28	Vertical
2	17949.6812	26.20	19.49	45.69	54.00	-8.31	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

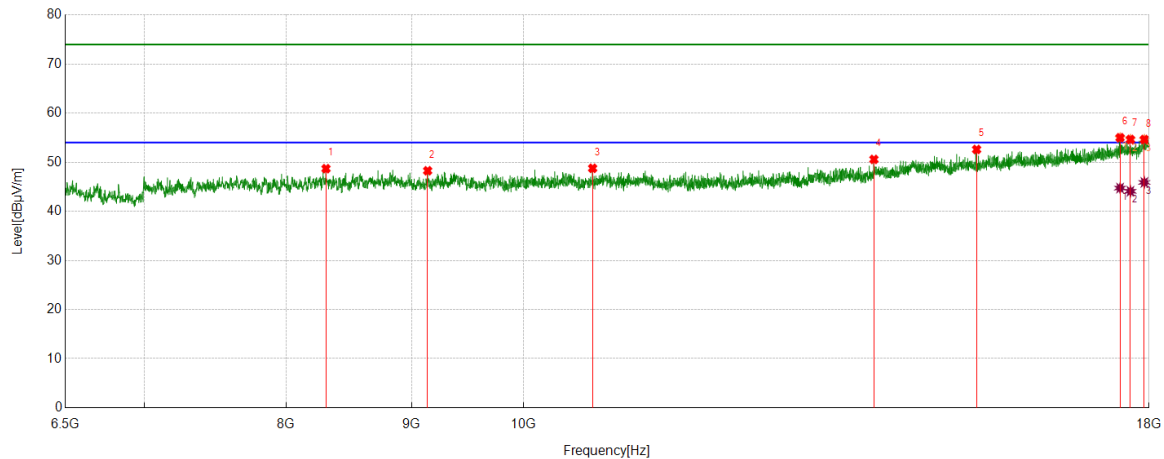

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8305.7257	42.37	6.32	48.69	74.00	-25.31	Horizontal
2	9138.1423	42.44	5.83	48.27	74.00	-25.73	Horizontal
3	10670.7088	41.94	6.83	48.77	74.00	-25.23	Horizontal
4	13899.7375	39.08	11.50	50.58	74.00	-23.42	Horizontal
5	15307.2259	39.13	13.47	52.60	74.00	-21.40	Horizontal
6	17516.9396	37.38	17.62	55.00	74.00	-19.00	Horizontal
7	17688.0235	36.47	18.17	54.64	74.00	-19.36	Horizontal
8	17920.9276	35.27	19.36	54.63	74.00	-19.37	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17516.9396	27.12	17.62	44.74	54.00	-9.26	Horizontal
2	17688.0235	25.92	18.17	44.09	54.00	-9.91	Horizontal
3	17920.9276	26.53	19.36	45.89	54.00	-8.11	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

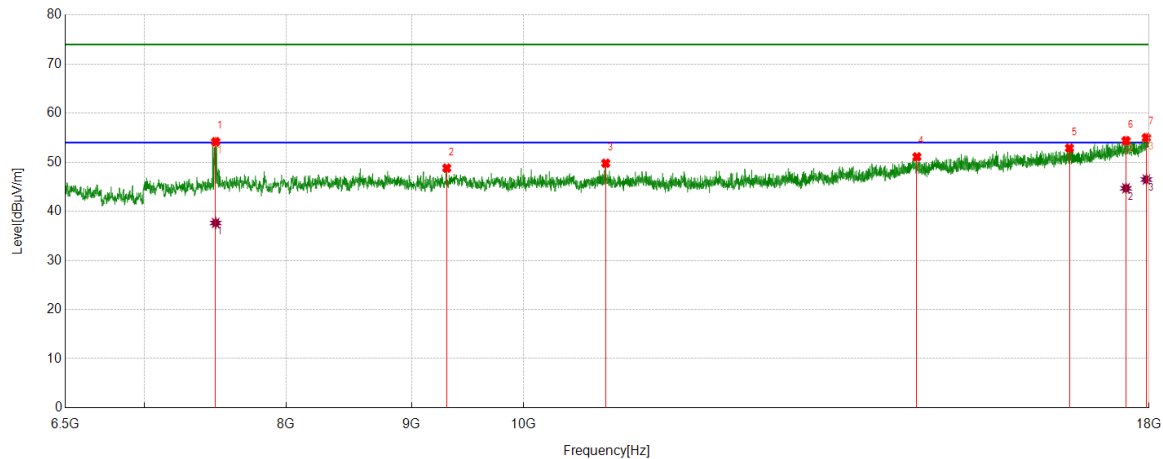

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7487.6860	49.66	4.53	54.19	74.00	-19.81	Vertical
2	9303.4754	42.62	6.18	48.80	74.00	-25.20	Vertical
3	10802.9754	42.81	6.99	49.80	74.00	-24.20	Vertical
4	14471.9340	38.24	12.86	51.10	74.00	-22.90	Vertical
5	16703.2129	36.92	15.96	52.88	74.00	-21.12	Vertical
6	17614.7018	36.32	18.06	54.38	74.00	-19.62	Vertical
7	17955.4319	35.43	19.57	55.00	74.00	-19.00	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7487.6860	33.10	4.53	37.63	54.00	-16.37	Vertical
2	17614.7018	26.63	18.06	44.69	54.00	-9.31	Vertical
3	17955.4319	26.91	19.57	46.48	54.00	-7.52	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

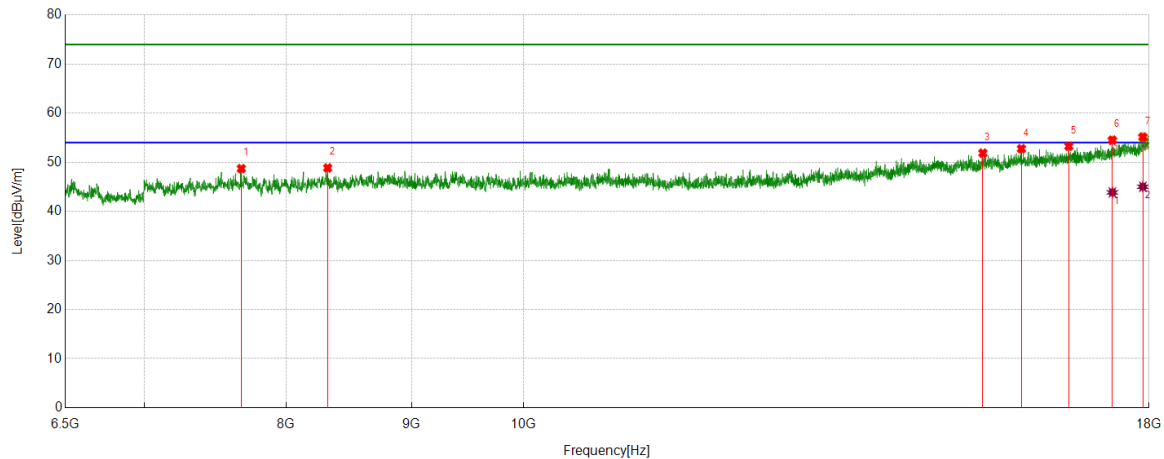

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7670.2713	43.49	5.21	48.70	74.00	-25.30	Horizontal
2	8318.6648	42.89	5.95	48.84	74.00	-25.16	Horizontal
3	15397.7997	38.21	13.65	51.86	74.00	-22.14	Horizontal
4	15965.6832	38.24	14.51	52.75	74.00	-21.25	Horizontal
5	16693.1491	37.43	15.83	53.26	74.00	-20.74	Horizontal
6	17390.4238	37.16	17.34	54.50	74.00	-19.50	Horizontal
7	17896.4871	35.91	19.23	55.14	74.00	-18.86	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17390.4238	26.51	17.34	43.85	54.00	-10.15	Horizontal
2	17896.4871	25.78	19.23	45.01	54.00	-8.99	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.