


Test Mode	Channel	Polarization	Verdict
11a	5200	Vertical	PASS

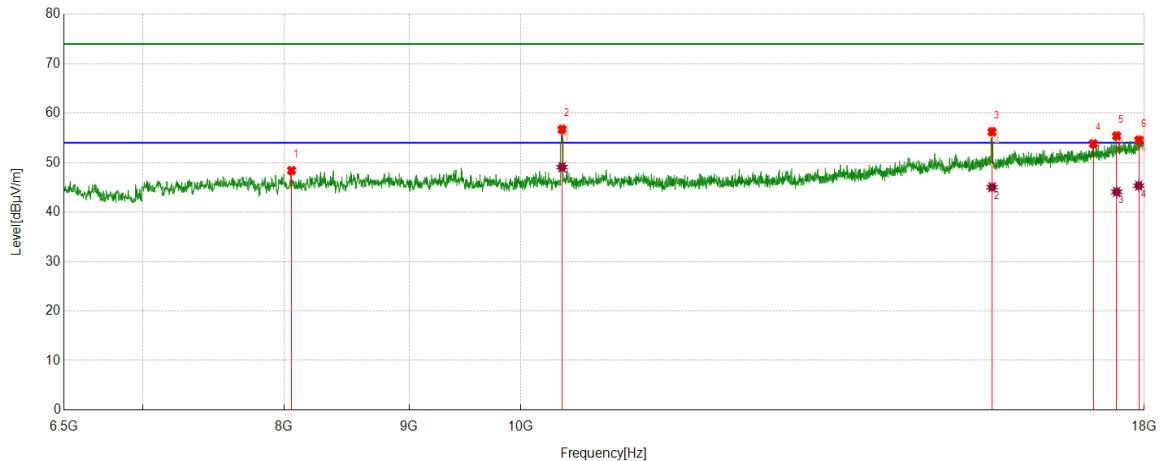

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8056.5928	42.95	5.47	48.42	74.00	-25.58	Vertical
2	10397.2329	50.03	6.70	56.73	74.00	-17.27	Vertical
3	15594.1824	42.59	13.65	56.24	74.00	-17.76	Vertical
4	17156.5261	37.36	16.46	53.82	74.00	-20.18	Vertical
5	17538.0063	37.73	17.67	55.40	74.00	-18.60	Vertical
6	17907.9847	35.31	19.23	54.54	74.00	-19.46	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10397.2329	42.38	6.70	49.08	54.00	-4.92	Vertical
2	15594.1824	31.39	13.65	45.04	54.00	-8.96	Vertical
3	17538.0063	26.41	17.67	44.08	54.00	-9.92	Vertical
4	17907.9847	26.11	19.23	45.34	54.00	-8.66	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5240	Horizontal	PASS

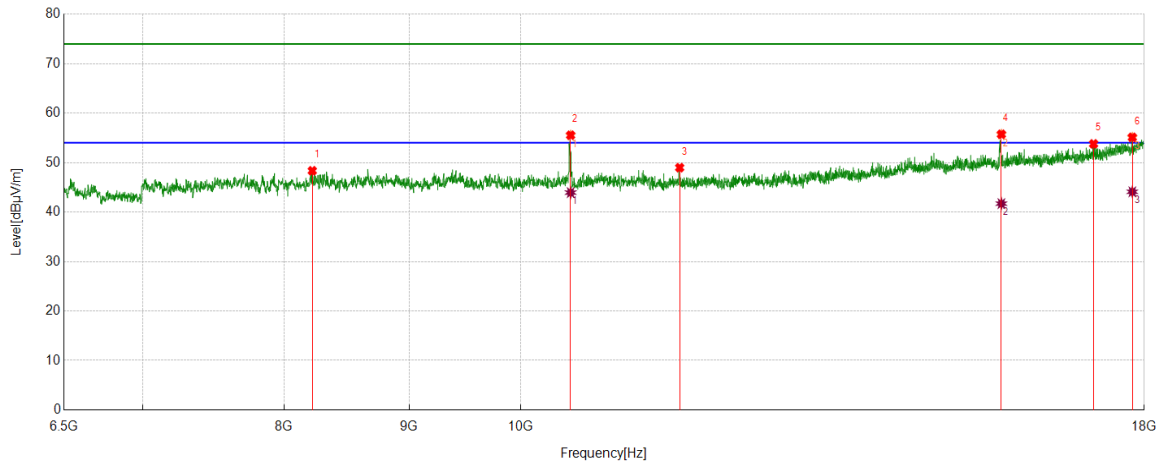

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8215.7026	42.33	6.02	48.35	74.00	-25.65	Horizontal
2	10481.5803	48.73	6.81	55.54	74.00	-18.46	Horizontal
3	11616.4361	41.42	7.56	48.98	74.00	-25.02	Horizontal
4	15732.2054	41.57	14.16	55.73	74.00	-18.27	Horizontal
5	17160.3601	37.32	16.47	53.79	74.00	-20.21	Horizontal
6	17798.7165	36.29	18.82	55.11	74.00	-18.89	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10481.5803	37.13	6.81	43.94	54.00	-10.06	Horizontal
2	15732.2054	27.55	14.16	41.71	54.00	-12.29	Horizontal
3	17798.7165	25.28	18.82	44.10	54.00	-9.90	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5240	Vertical	PASS

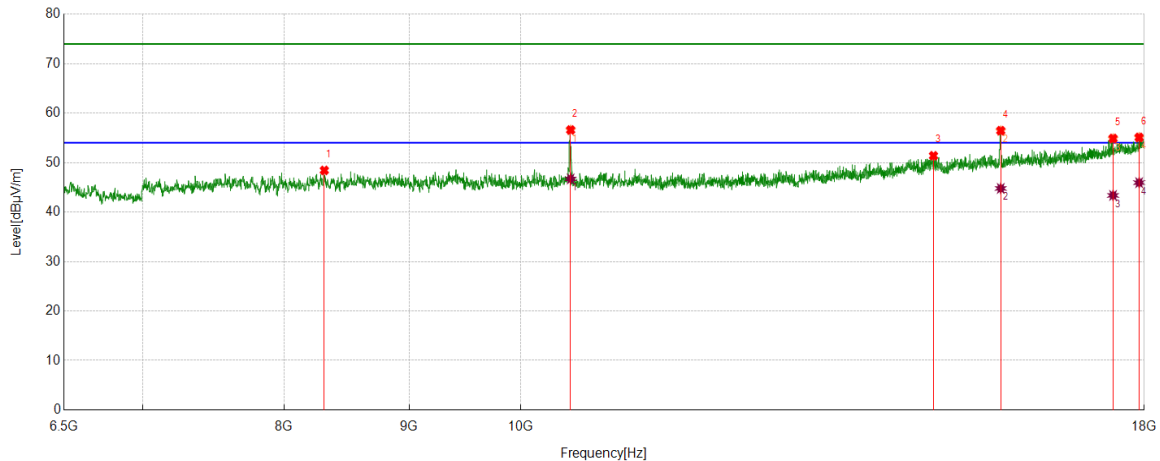

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8309.6349	42.09	6.34	48.43	74.00	-25.57	Vertical
2	10481.5803	49.79	6.81	56.60	74.00	-17.40	Vertical
3	14756.4594	38.47	12.92	51.39	74.00	-22.61	Vertical
4	15722.6204	42.40	14.06	56.46	74.00	-17.54	Vertical
5	17478.5798	37.24	17.65	54.89	74.00	-19.11	Vertical
6	17913.7356	35.81	19.29	55.10	74.00	-18.90	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10481.5803	39.90	6.81	46.71	54.00	-7.29	Vertical
2	15722.6204	30.72	14.06	44.78	54.00	-9.22	Vertical
3	17478.5798	25.72	17.65	43.37	54.00	-10.63	Vertical
4	17913.7356	26.66	19.29	45.95	54.00	-8.05	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5260	Horizontal	PASS

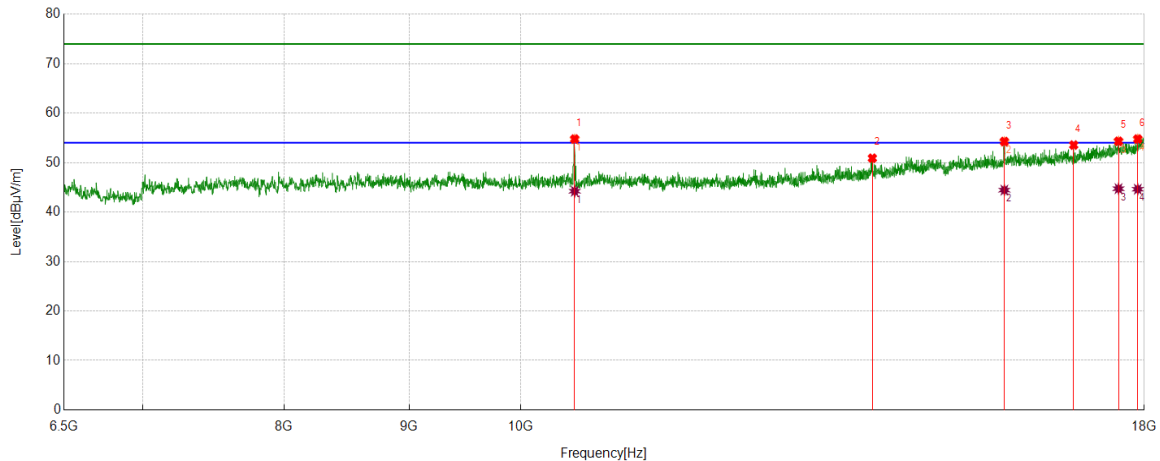

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10521.8370	47.87	6.90	54.77	74.00	-19.23	Horizontal
2	13930.2384	39.51	11.38	50.89	74.00	-23.11	Horizontal
3	15776.2960	40.07	14.20	54.27	74.00	-19.73	Horizontal
4	16842.1404	37.30	16.25	53.55	74.00	-20.45	Horizontal
5	17568.6781	36.42	17.89	54.31	74.00	-19.69	Horizontal
6	17890.7318	35.47	19.30	54.77	74.00	-19.23	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10521.8370	37.32	6.90	44.22	54.00	-9.78	Horizontal
2	15776.2960	30.24	14.20	44.44	54.00	-9.56	Horizontal
3	17568.6781	26.84	17.89	44.73	54.00	-9.27	Horizontal
4	17890.7318	25.32	19.30	44.62	54.00	-9.38	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5260	Vertical	PASS

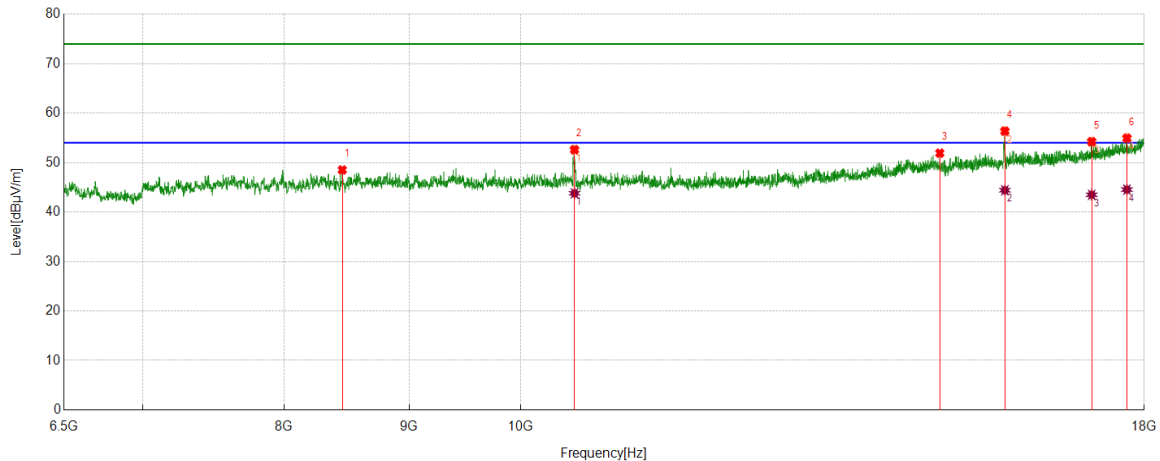

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8451.4919	42.74	5.78	48.52	74.00	-25.48	Vertical
2	10519.9200	45.68	6.94	52.62	74.00	-21.38	Vertical
3	14844.6408	39.06	12.86	51.92	74.00	-22.08	Vertical
4	15783.9640	42.13	14.24	56.37	74.00	-17.63	Vertical
5	17129.6883	37.61	16.63	54.24	74.00	-19.76	Vertical
6	17708.6181	36.60	18.35	54.95	74.00	-19.05	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10519.9200	36.86	6.94	43.80	54.00	-10.20	Vertical
2	15783.9640	30.18	14.24	44.42	54.00	-9.58	Vertical
3	17129.6883	26.86	16.63	43.49	54.00	-10.51	Vertical
4	17708.6181	26.20	18.35	44.55	54.00	-9.45	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5280	Horizontal	PASS

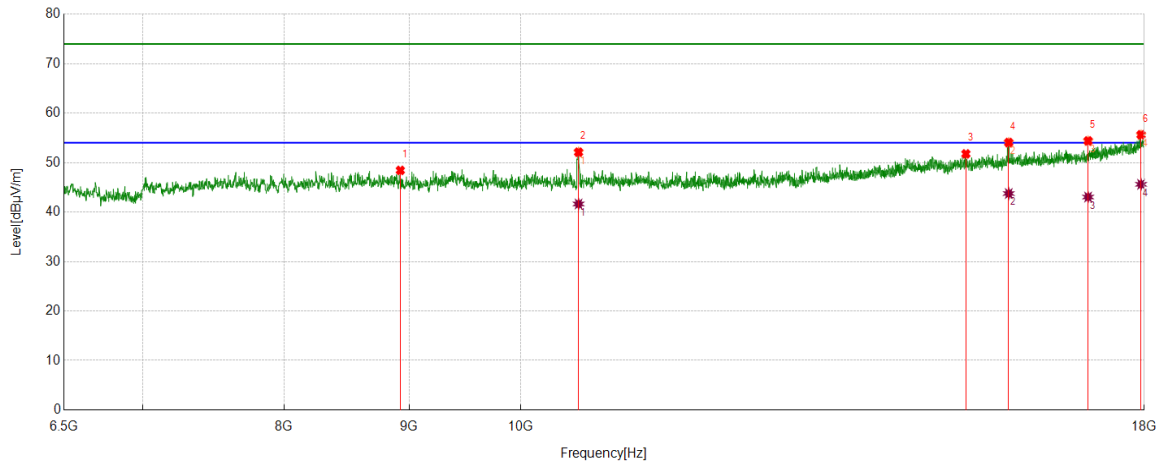

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8926.9045	42.29	6.14	48.43	74.00	-25.57	Horizontal
2	10560.1767	45.31	6.80	52.11	74.00	-21.89	Horizontal
3	15214.6191	38.34	13.43	51.77	74.00	-22.23	Horizontal
4	15841.4736	39.49	14.57	54.06	74.00	-19.94	Horizontal
5	17072.1787	38.05	16.34	54.39	74.00	-19.61	Horizontal
6	17946.3244	36.15	19.48	55.63	74.00	-18.37	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10560.1767	34.84	6.80	41.64	54.00	-12.36	Horizontal
2	15841.4736	29.18	14.57	43.75	54.00	-10.25	Horizontal
3	17072.1787	26.70	16.34	43.04	54.00	-10.96	Horizontal
4	17946.3244	26.13	19.48	45.61	54.00	-8.39	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5280	Vertical	PASS

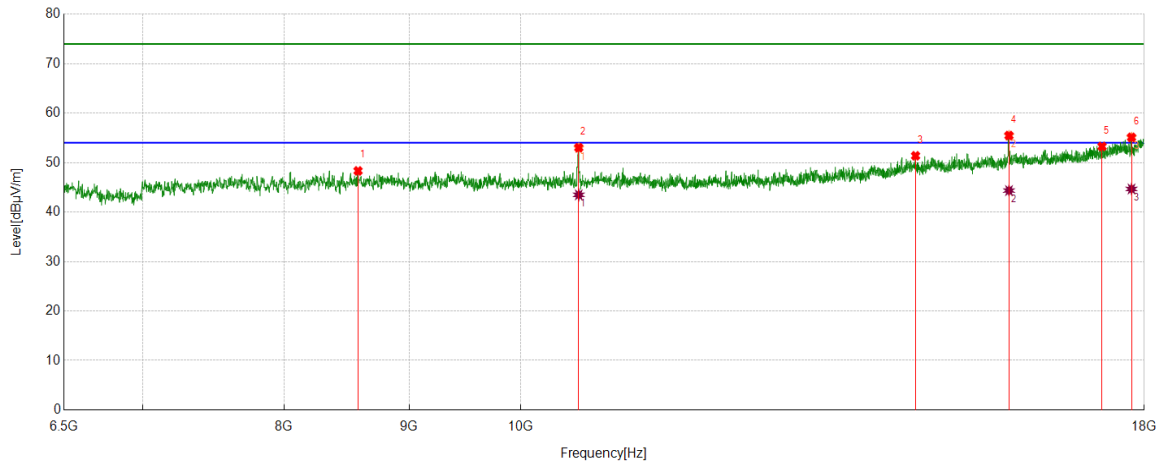

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8578.0130	41.93	6.40	48.33	74.00	-25.67	Vertical
2	10562.0937	46.17	6.85	53.02	74.00	-20.98	Vertical
3	14509.1682	38.65	12.73	51.38	74.00	-22.62	Vertical
4	15845.3076	40.78	14.69	55.47	74.00	-18.53	Vertical
5	17298.3831	36.20	17.07	53.27	74.00	-19.73	Vertical
6	17785.2976	36.37	18.74	55.11	74.00	-18.89	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10562.0937	36.63	6.85	43.48	54.00	-10.52	Vertical
2	15845.3076	29.66	14.69	44.35	54.00	-9.65	Vertical
3	17785.2976	25.93	18.74	44.67	54.00	-9.33	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5320	Horizontal	PASS

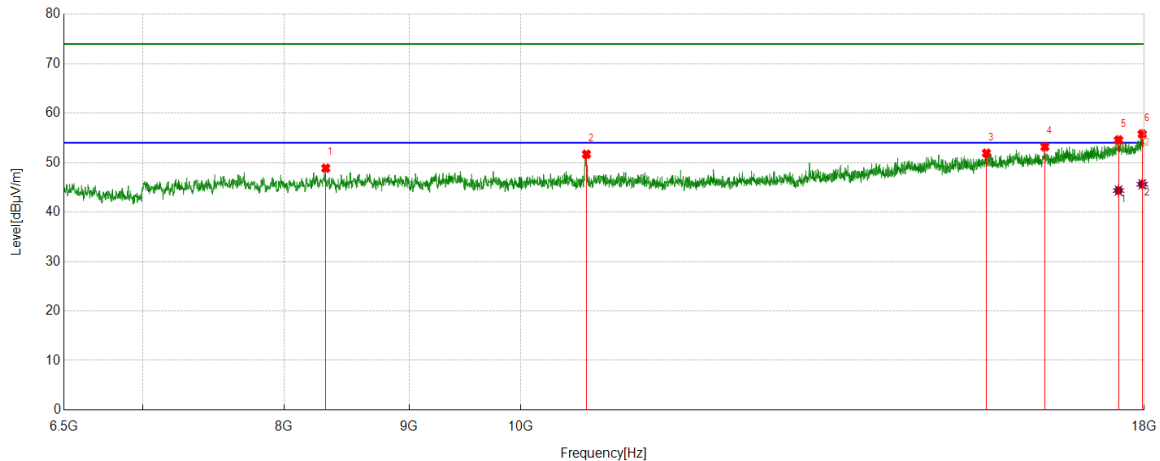

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8321.1369	42.96	5.91	48.87	74.00	-25.13	Horizontal
2	10638.7731	44.82	6.87	51.69	74.00	-22.31	Horizontal
3	15511.7520	38.06	13.84	51.90	74.00	-22.10	Horizontal
4	16389.7316	38.23	14.98	53.21	74.00	-20.79	Horizontal
5	17568.6781	36.68	17.89	54.57	74.00	-19.43	Horizontal
6	17965.4942	36.15	19.63	55.78	74.00	-18.22	Horizontal


#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17568.6781	26.47	17.89	44.36	54.00	-9.64	Horizontal
2	17965.4942	26.00	19.63	45.63	54.00	-8.37	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11a	5320	Vertical	PASS

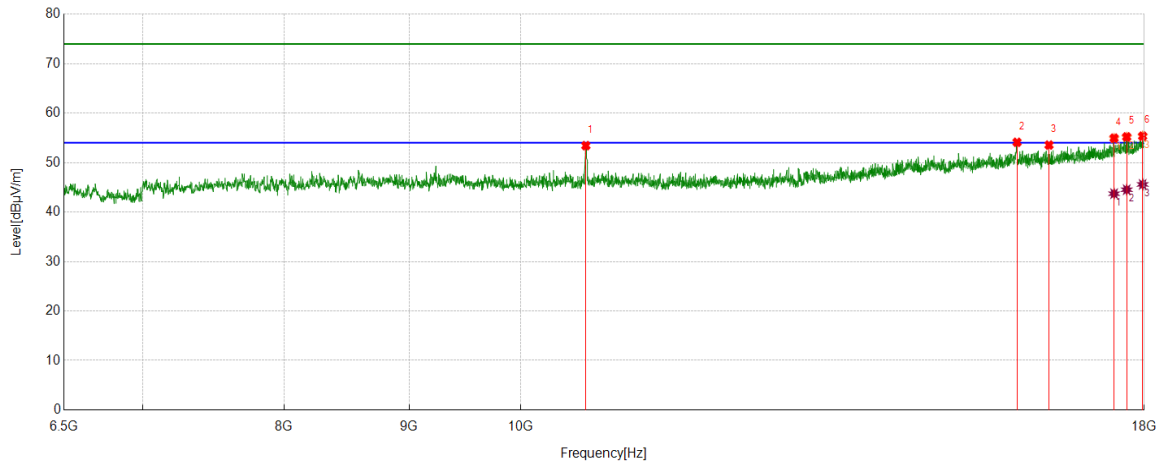

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10633.0222	46.46	6.97	53.43	74.00	-20.57	Vertical
2	15966.0777	39.61	14.50	54.11	74.00	-19.89	Vertical
3	16454.9092	37.89	15.66	53.55	74.00	-19.95	Vertical
4	17495.8326	37.31	17.64	54.95	74.00	-19.05	Vertical
5	17704.7841	36.89	18.31	55.20	74.00	-18.80	Vertical
6	17973.1622	35.66	19.69	55.35	74.00	-18.65	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17495.8326	26.08	17.64	43.72	54.00	-10.28	Vertical
2	17704.7841	26.21	18.31	44.52	54.00	-9.48	Vertical
3	17973.1622	25.90	19.69	45.59	54.00	-8.41	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5500	Horizontal	PASS

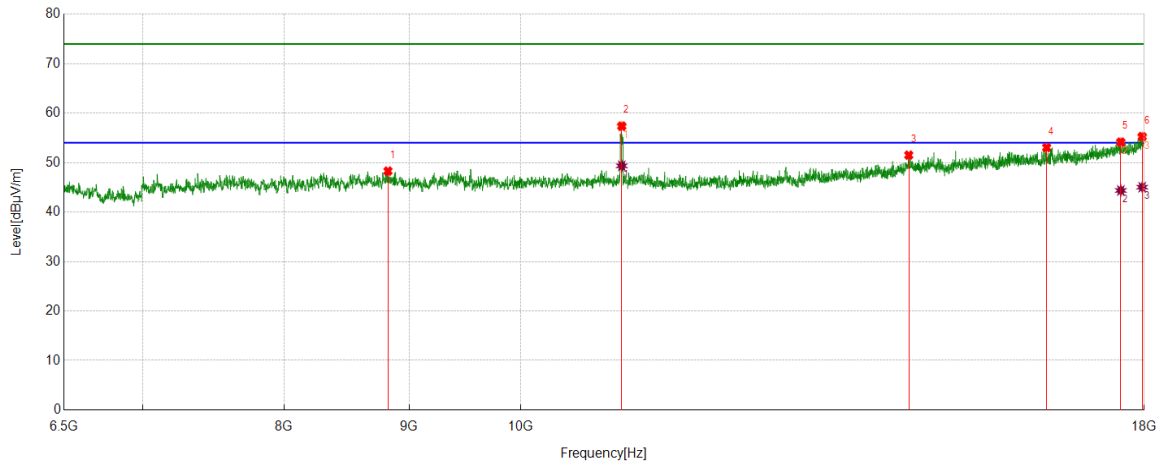

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8823.3872	42.04	6.25	48.29	74.00	-25.71	Horizontal
2	10999.1665	50.10	7.28	57.38	74.00	-16.62	Horizontal
3	14417.1529	38.60	12.91	51.51	74.00	-22.49	Horizontal
4	16418.4864	37.88	15.16	53.04	74.00	-20.96	Horizontal
5	17607.0178	36.09	18.05	54.14	74.00	-19.86	Horizontal
6	17965.4942	35.64	19.63	55.27	74.00	-18.73	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10999.1665	42.07	7.28	49.35	54.00	-4.65	Horizontal
2	17607.0178	26.32	18.05	44.37	54.00	-9.63	Horizontal
3	17965.4942	25.41	19.63	45.04	54.00	-8.96	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5500	Vertical	PASS

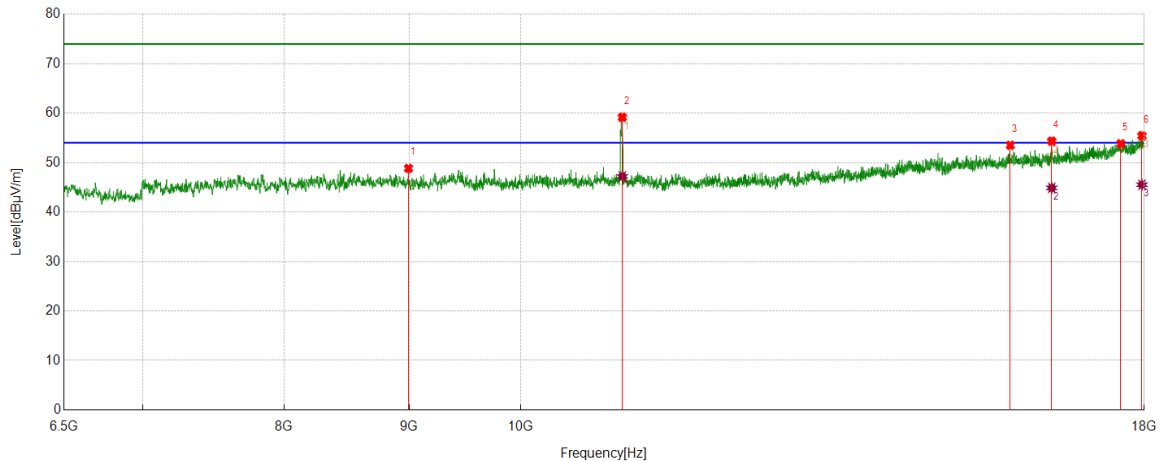

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8995.9160	42.80	6.03	48.83	74.00	-25.17	Vertical
2	11004.9175	51.90	7.28	59.18	74.00	-14.82	Vertical
3	15864.4774	38.85	14.66	53.51	74.00	-19.99	Vertical
4	16497.0828	38.57	15.77	54.34	74.00	-19.66	Vertical
5	17607.0178	35.77	18.05	53.82	74.00	-20.18	Vertical
6	17961.6603	35.81	19.63	55.44	74.00	-18.56	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11004.9175	39.95	7.28	47.23	54.00	-6.77	Vertical
2	16497.0828	29.12	15.77	44.89	54.00	-9.11	Vertical
3	17961.6603	25.90	19.63	45.53	54.00	-8.47	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5580	Horizontal	PASS

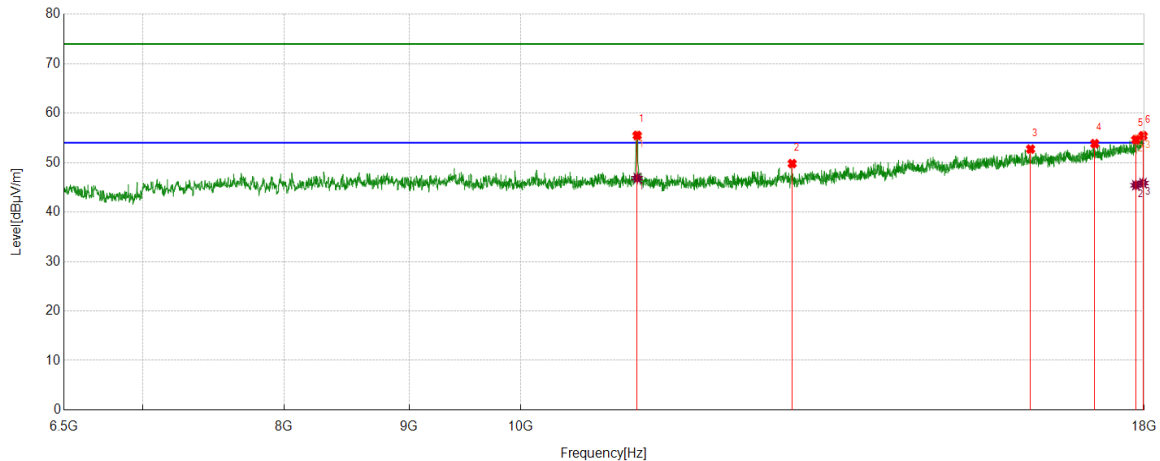

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11160.1934	48.29	7.21	55.50	74.00	-18.50	Horizontal
2	12916.1527	40.41	9.39	49.80	74.00	-24.20	Horizontal
3	16171.1952	37.54	15.19	52.73	74.00	-21.27	Horizontal
4	17179.5299	37.26	16.58	53.84	74.00	-20.16	Horizontal
5	17858.1430	35.40	19.24	54.64	74.00	-19.36	Horizontal
6	17978.9132	35.64	19.79	55.43	74.00	-18.57	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11160.1934	39.66	7.21	46.87	54.00	-7.13	Horizontal
2	17858.1430	26.19	19.24	45.43	54.00	-8.57	Horizontal
3	17978.9132	26.07	19.79	45.86	54.00	-8.14	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5580	Vertical	PASS

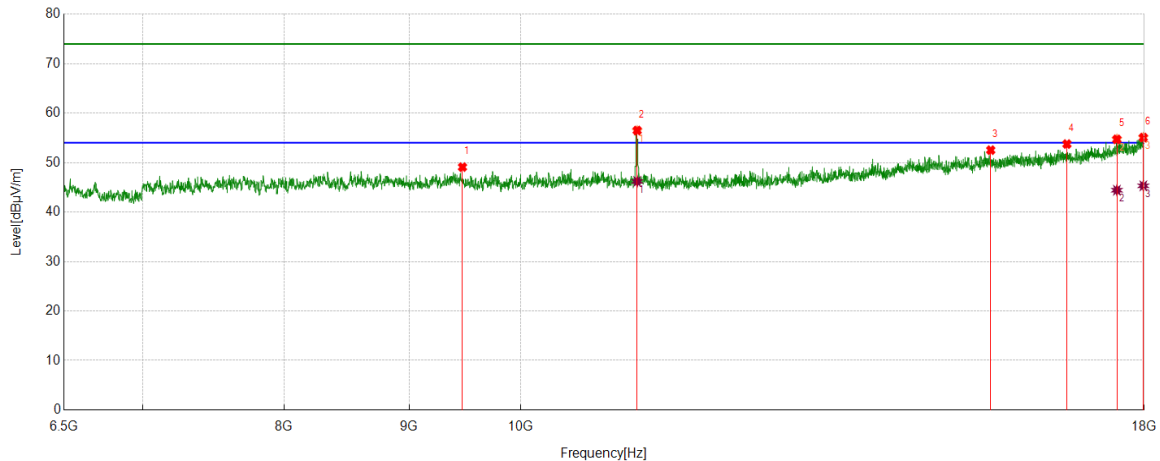

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9465.5776	42.59	6.50	49.09	74.00	-24.91	Vertical
2	11160.1934	49.29	7.21	56.50	74.00	-17.50	Vertical
3	15575.0125	38.86	13.66	52.52	74.00	-21.48	Vertical
4	16734.7891	37.71	16.04	53.75	74.00	-20.25	Vertical
5	17541.8403	37.00	17.71	54.71	74.00	-19.29	Vertical
6	17984.6641	35.27	19.80	55.07	74.00	-18.93	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11160.1934	38.99	7.21	46.20	54.00	-7.80	Vertical
2	17541.8403	26.71	17.71	44.42	54.00	-9.58	Vertical
3	17984.6641	25.51	19.80	45.31	54.00	-8.69	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5700	Horizontal	PASS

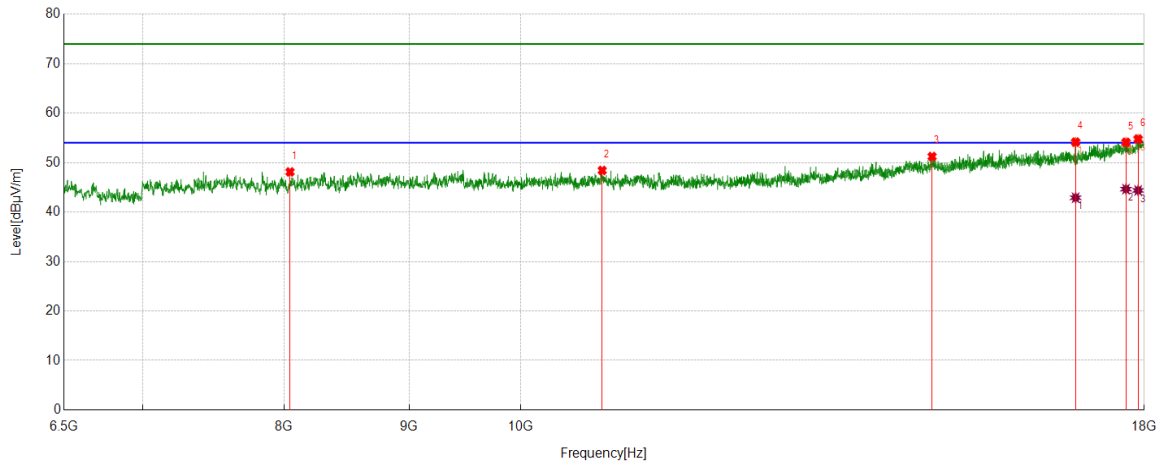

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8045.0908	42.48	5.64	48.12	74.00	-25.88	Horizontal
2	10797.8830	41.41	7.01	48.42	74.00	-25.58	Horizontal
3	14737.2895	38.36	12.87	51.23	74.00	-22.77	Horizontal
4	16872.8121	38.07	16.08	54.15	74.00	-19.85	Horizontal
5	17693.2822	35.90	18.21	54.11	74.00	-19.89	Horizontal
6	17896.4827	35.55	19.23	54.78	74.00	-19.22	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16872.8121	26.82	16.08	42.90	54.00	-11.10	Horizontal
2	17693.2822	26.43	18.21	44.64	54.00	-9.36	Horizontal
3	17896.4827	25.15	19.23	44.38	54.00	-9.62	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5700	Vertical	PASS

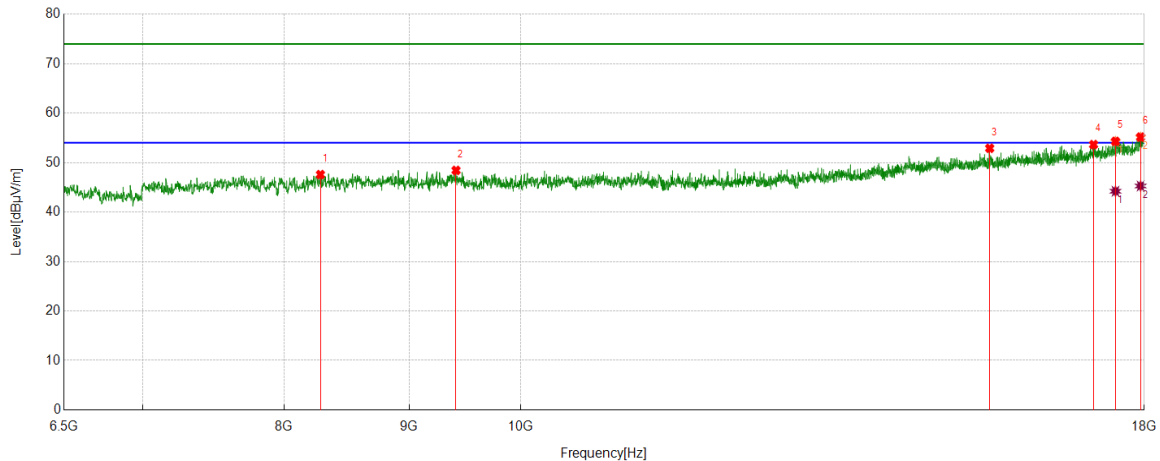

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8278.9632	41.18	6.40	47.58	74.00	-26.42	Vertical
2	9408.0680	41.90	6.53	48.43	74.00	-25.57	Vertical
3	15559.6766	39.23	13.67	52.90	74.00	-21.10	Vertical
4	17160.3601	37.17	16.47	53.64	74.00	-20.36	Vertical
5	17518.8365	36.68	17.62	54.30	74.00	-19.70	Vertical
6	17938.6564	35.72	19.44	55.16	74.00	-18.84	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17518.8365	26.59	17.62	44.21	54.00	-9.79	Vertical
2	17938.6564	25.83	19.44	45.27	54.00	-8.73	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5720	Horizontal	PASS

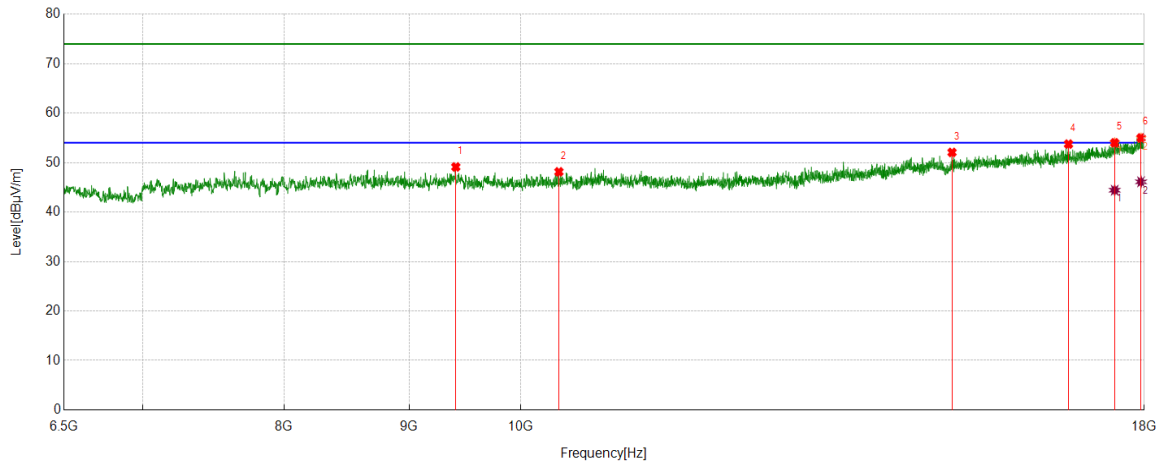

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9406.1510	42.57	6.55	49.12	74.00	-24.88	Horizontal
2	10366.5611	41.46	6.68	48.14	74.00	-25.86	Horizontal
3	15017.1695	39.12	12.94	52.06	74.00	-21.94	Horizontal
4	16759.7100	37.67	16.08	53.75	74.00	-20.25	Horizontal
5	17505.4176	36.38	17.62	54.00	74.00	-20.00	Horizontal
6	17946.3244	35.51	19.48	54.99	74.00	-19.01	Horizontal


#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17505.4176	26.80	17.62	44.42	54.00	-9.58	Horizontal
2	17946.3244	26.64	19.48	46.12	54.00	-7.88	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11a	5720	Vertical	PASS

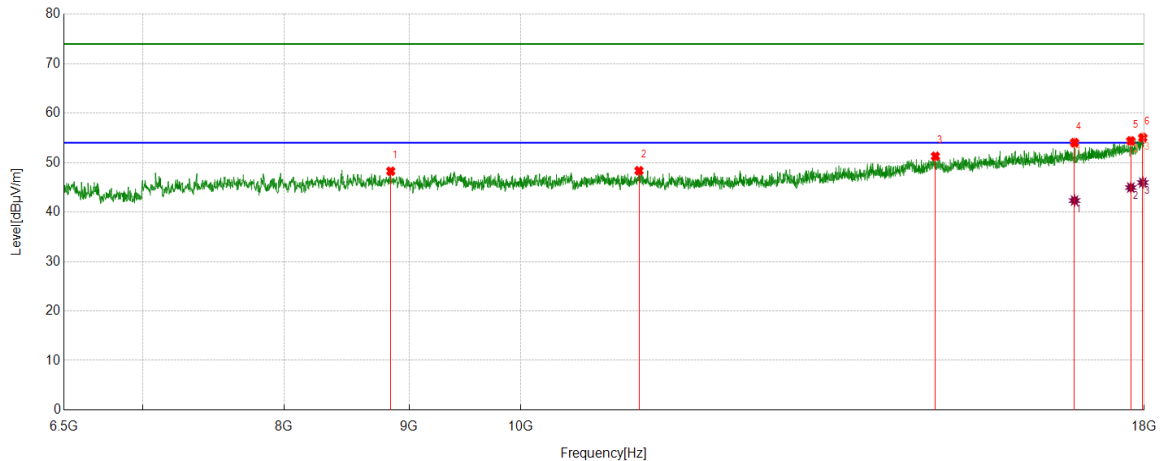

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8846.3911	42.01	6.25	48.26	74.00	-25.74	Vertical
2	11179.3632	40.98	7.38	48.36	74.00	-25.64	Vertical
3	14783.2972	38.43	12.85	51.28	74.00	-22.72	Vertical
4	16855.5593	37.78	16.25	54.03	74.00	-19.97	Vertical
5	17773.7956	35.68	18.71	54.39	74.00	-19.61	Vertical
6	17975.0792	35.32	19.73	55.05	74.00	-18.95	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16855.5593	26.08	16.25	42.33	54.00	-11.67	Vertical
2	17773.7956	26.25	18.71	44.96	54.00	-9.04	Vertical
3	17975.0792	26.23	19.73	45.96	54.00	-8.04	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS

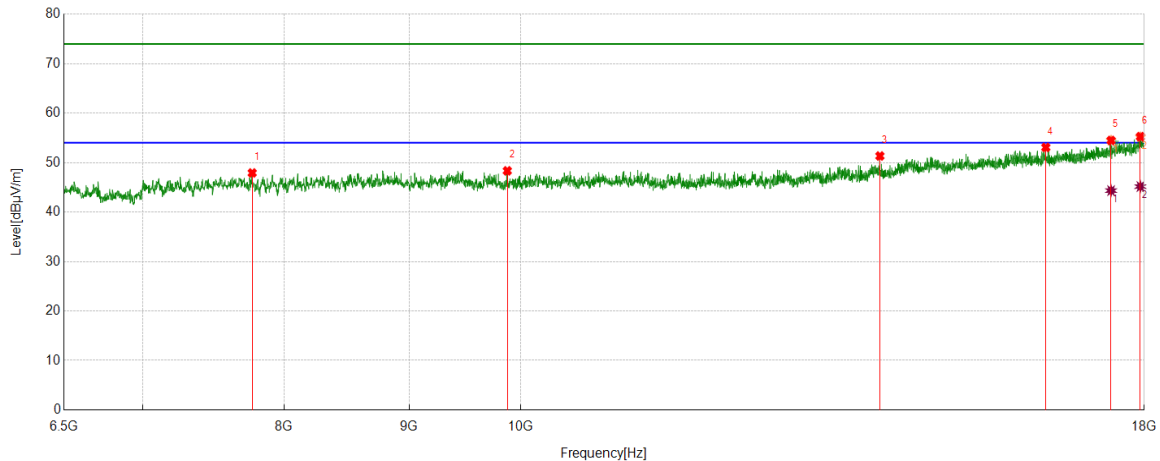

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7763.2939	42.76	5.15	47.91	74.00	-26.09	Horizontal
2	9873.8956	41.77	6.57	48.34	74.00	-25.66	Horizontal
3	14029.9217	39.38	11.96	51.34	74.00	-22.66	Horizontal
4	16405.0675	38.01	15.06	53.07	74.00	-20.93	Horizontal
5	17445.9910	36.91	17.57	54.48	74.00	-19.52	Horizontal
6	17934.8225	35.85	19.40	55.25	74.00	-18.75	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17445.9910	26.77	17.57	44.34	54.00	-9.66	Horizontal
2	17934.8225	25.76	19.40	45.16	54.00	-8.84	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5745	Vertical	PASS

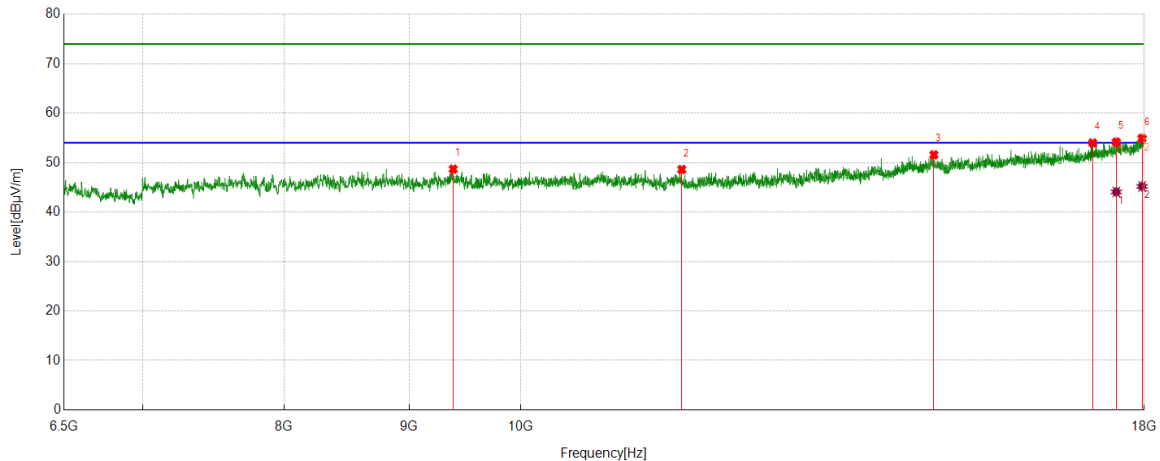

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9383.1472	42.19	6.49	48.68	74.00	-25.32	Vertical
2	11639.4399	41.02	7.59	48.61	74.00	-25.39	Vertical
3	14762.2104	38.63	12.95	51.58	74.00	-22.42	Vertical
4	17146.9412	37.55	16.43	53.98	74.00	-20.02	Vertical
5	17532.2554	36.53	17.60	54.13	74.00	-19.87	Vertical
6	17963.5773	35.29	19.63	54.92	74.00	-19.08	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17532.2554	26.47	17.60	44.07	54.00	-9.93	Vertical
2	17963.5773	25.56	19.63	45.19	54.00	-8.81	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5785	Horizontal	PASS

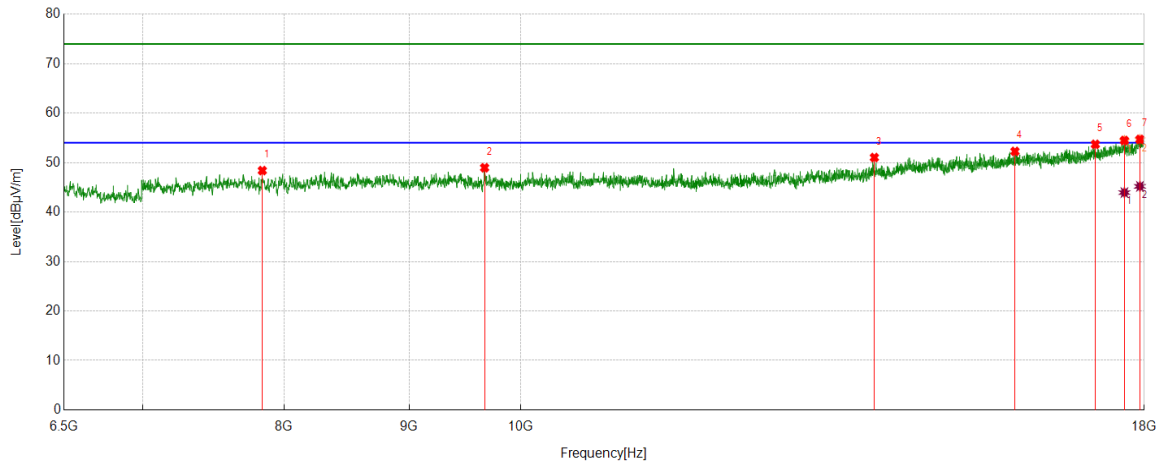

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7838.0563	43.09	5.30	48.39	74.00	-25.61	Horizontal
2	9664.9442	42.52	6.44	48.96	74.00	-25.04	Horizontal
3	13957.0762	39.57	11.46	51.03	74.00	-22.97	Horizontal
4	15935.4059	37.69	14.58	52.27	74.00	-21.73	Horizontal
5	17189.1149	37.10	16.60	53.70	74.00	-20.30	Horizontal
6	17666.4444	36.41	18.07	54.48	74.00	-19.52	Horizontal
7	17927.1545	35.32	19.37	54.69	74.00	-17.31	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17666.4444	25.87	18.07	43.94	54.00	-10.06	Horizontal
2	17927.1545	25.83	19.37	45.20	54.00	-8.80	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5785	Vertical	PASS

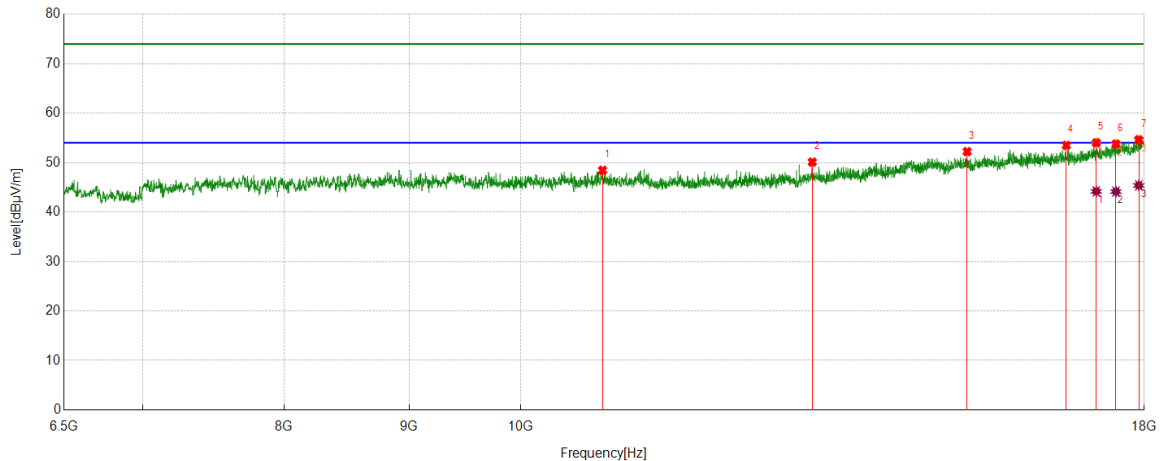

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10801.7170	41.45	7.00	48.45	74.00	-25.55	Vertical
2	13163.4439	40.30	9.81	50.11	74.00	-23.89	Vertical
3	15231.8720	38.83	13.40	52.23	74.00	-21.77	Vertical
4	16725.2042	37.24	16.24	53.48	74.00	-20.52	Vertical
5	17204.4507	37.33	16.67	54.00	74.00	-20.00	Vertical
6	17526.5044	36.16	17.59	53.75	74.00	-20.25	Vertical
7	17907.9847	35.39	19.23	54.62	74.00	-19.38	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17204.4507	27.52	16.67	44.19	54.00	-9.81	Vertical
2	17526.5044	26.55	17.59	44.14	54.00	-9.86	Vertical
3	17907.9847	26.16	19.23	45.39	54.00	-8.61	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5825	Horizontal	PASS

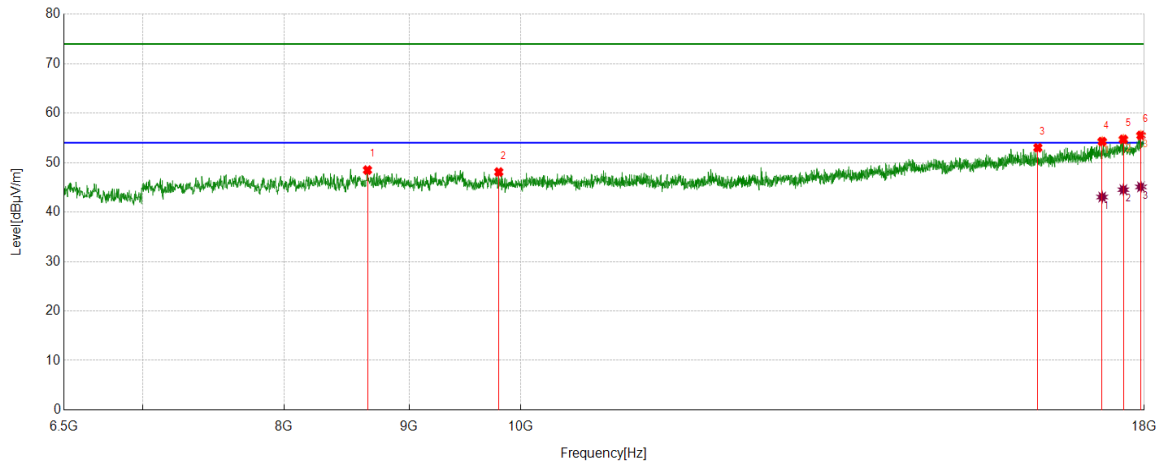

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8654.6924	42.22	6.27	48.49	74.00	-25.51	Horizontal
2	9795.2992	41.70	6.40	48.10	74.00	-25.90	Horizontal
3	16282.3804	37.86	15.15	53.01	74.00	-20.99	Horizontal
4	17300.3001	37.19	17.07	54.26	74.00	-19.74	Horizontal
5	17649.1915	36.68	18.03	54.71	74.00	-19.29	Horizontal
6	17944.4074	36.05	19.46	55.51	74.00	-18.49	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17300.3001	25.97	17.07	43.04	54.00	-10.96	Horizontal
2	17649.1915	26.50	18.03	44.53	54.00	-9.47	Horizontal
3	17944.4074	25.63	19.46	45.09	54.00	-8.91	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5825	Vertical	PASS

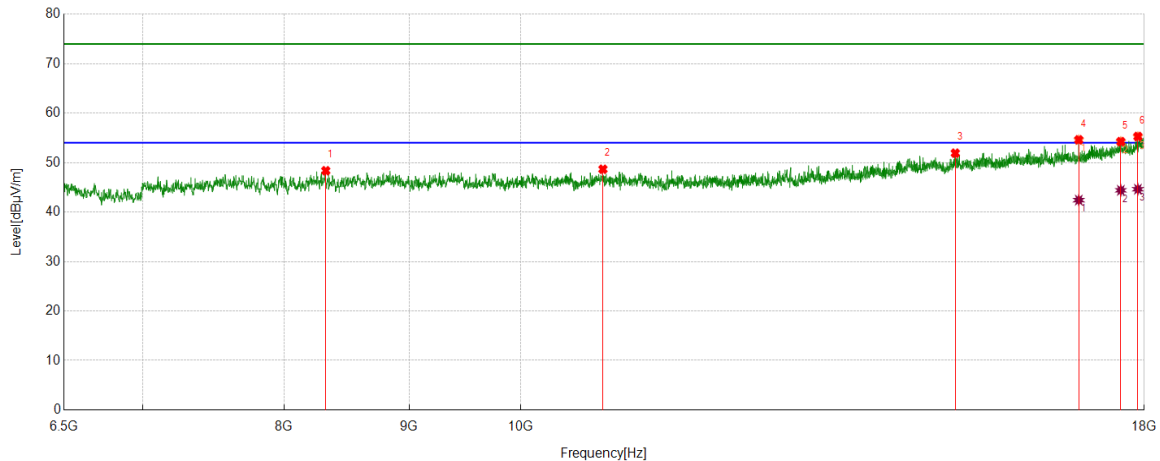

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8321.1369	42.45	5.91	48.36	74.00	-25.64	Vertical
2	10805.5509	41.70	6.96	48.66	74.00	-25.34	Vertical
3	15063.1772	38.84	13.07	51.91	74.00	-22.09	Vertical
4	16922.6538	38.51	16.10	54.61	74.00	-19.39	Vertical
5	17607.0178	36.20	18.05	54.25	74.00	-19.75	Vertical
6	17892.6488	36.00	19.28	55.28	74.00	-18.72	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16922.6538	26.32	16.10	42.42	54.00	-11.58	Vertical
2	17607.0178	26.35	18.05	44.40	54.00	-9.60	Vertical
3	17892.6488	25.34	19.28	44.62	54.00	-9.38	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5180	Horizontal	PASS

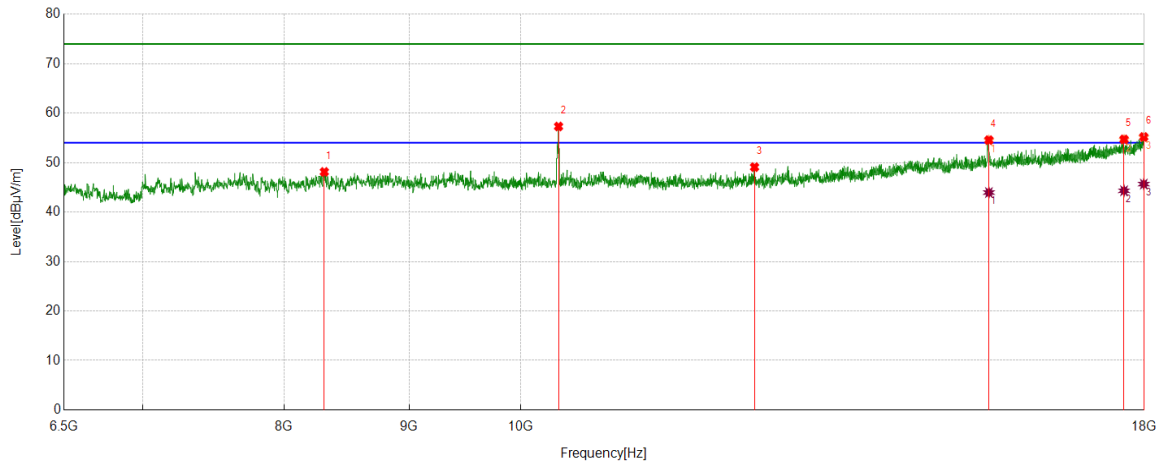

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8309.6349	41.79	6.34	48.13	74.00	-25.87	Horizontal
2	10362.7271	50.63	6.68	57.31	74.00	-16.69	Horizontal
3	12465.6609	40.56	8.53	49.09	74.00	-24.91	Horizontal
4	15548.1747	40.79	13.76	54.55	74.00	-19.45	Horizontal
5	17660.6934	36.63	18.07	54.70	74.00	-19.30	Horizontal
6	17992.3321	35.40	19.79	55.19	74.00	-18.81	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15548.1747	30.19	13.76	43.95	54.00	-10.05	Horizontal
2	17660.6934	26.24	18.07	44.31	54.00	-9.69	Horizontal
3	17992.3321	25.87	19.79	45.66	54.00	-8.34	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ac VHT20	5180	Vertical	PASS

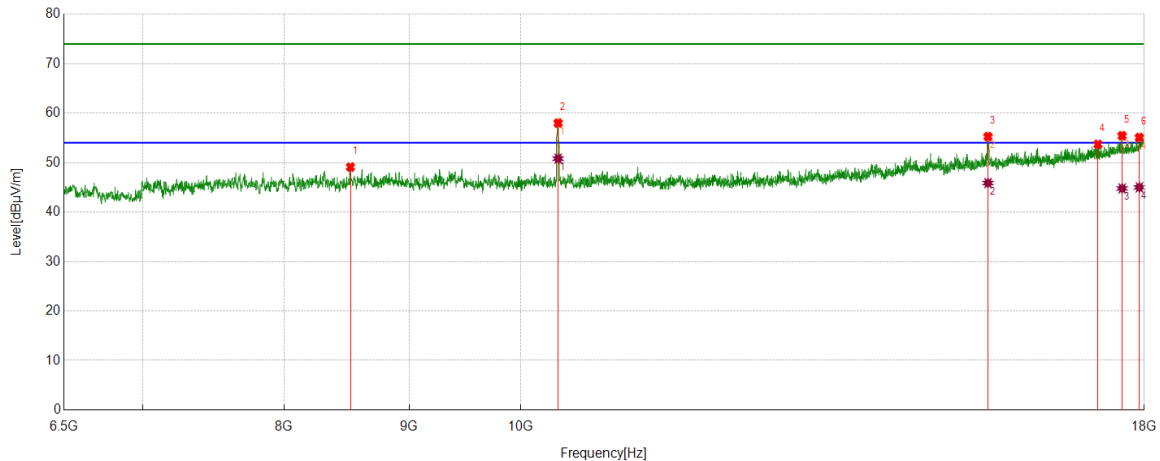

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8516.6694	42.81	6.30	49.11	74.00	-24.89	Vertical
2	10358.8931	51.30	6.70	58.00	74.00	-16.00	Vertical
3	15534.7558	41.47	13.79	55.26	74.00	-18.74	Vertical
4	17231.2885	36.98	16.72	53.70	74.00	-20.30	Vertical
5	17628.1047	37.38	18.06	55.44	74.00	-18.56	Vertical
6	17917.5696	35.76	19.33	55.09	74.00	-18.91	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10358.8931	44.10	6.70	50.80	54.00	-3.20	Vertical
2	15534.7558	32.08	13.79	45.87	54.00	-8.13	Vertical
3	17628.1047	26.72	18.06	44.78	54.00	-9.22	Vertical
4	17917.5696	25.66	19.33	44.99	54.00	-9.01	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5200	Horizontal	PASS

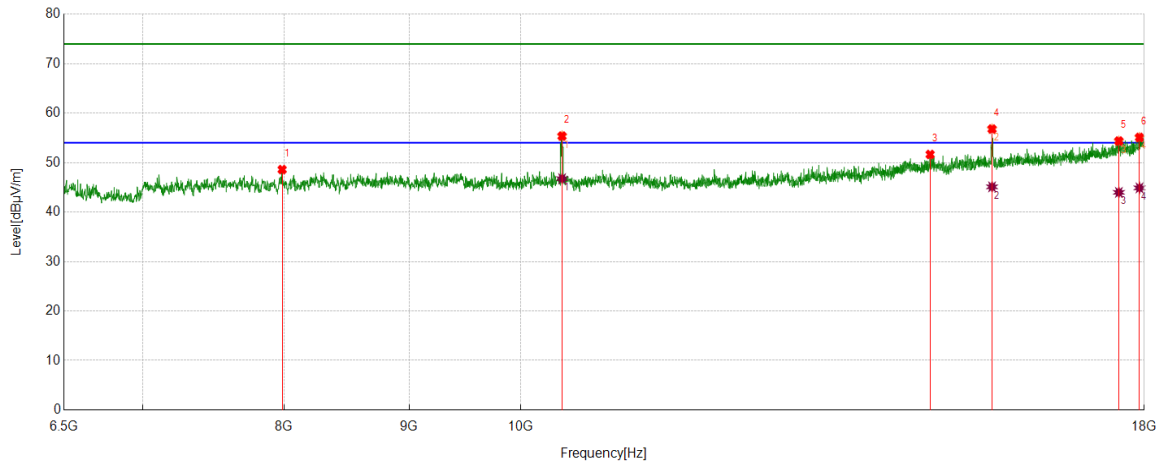

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7985.6643	43.09	5.50	48.59	74.00	-25.41	Horizontal
2	10397.2329	48.66	6.70	55.36	74.00	-18.64	Horizontal
3	14710.4517	38.88	12.77	51.65	74.00	-22.35	Horizontal
4	15594.1824	43.14	13.65	56.79	74.00	-17.21	Horizontal
5	17574.4291	36.44	17.92	54.36	74.00	-19.64	Horizontal
6	17919.4866	35.73	19.36	55.09	74.00	-18.91	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10397.2329	40.06	6.70	46.76	54.00	-7.24	Horizontal
2	15594.1824	31.45	13.65	45.10	54.00	-8.90	Horizontal
3	17574.4291	26.06	17.92	43.98	54.00	-10.02	Horizontal
4	17919.4866	25.53	19.36	44.89	54.00	-9.11	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5200	Vertical	PASS

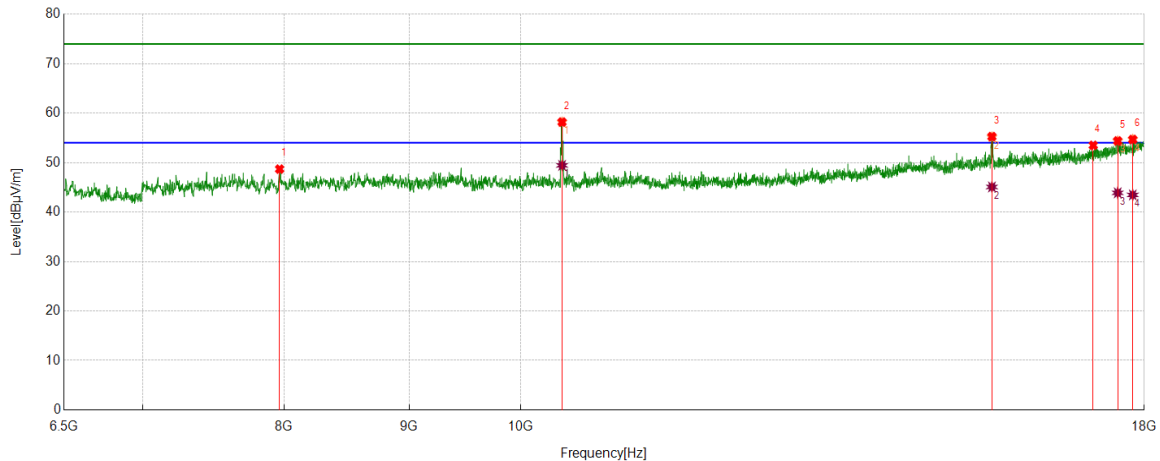

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7966.4944	43.10	5.59	48.69	74.00	-25.31	Vertical
2	10397.2329	51.50	6.70	58.20	74.00	-15.80	Vertical
3	15592.2654	41.61	13.65	55.26	74.00	-18.74	Vertical
4	17154.6091	37.02	16.47	53.49	74.00	-20.51	Vertical
5	17555.2592	36.61	17.77	54.38	74.00	-19.62	Vertical
6	17806.3844	35.78	18.90	54.68	74.00	-19.32	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10397.2329	42.74	6.70	49.44	54.00	-4.56	Vertical
2	15592.2654	31.43	13.65	45.08	54.00	-8.92	Vertical
3	17555.2592	26.12	17.77	43.89	54.00	-10.11	Vertical
4	17806.3844	24.57	18.90	43.47	54.00	-10.53	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5240	Horizontal	PASS

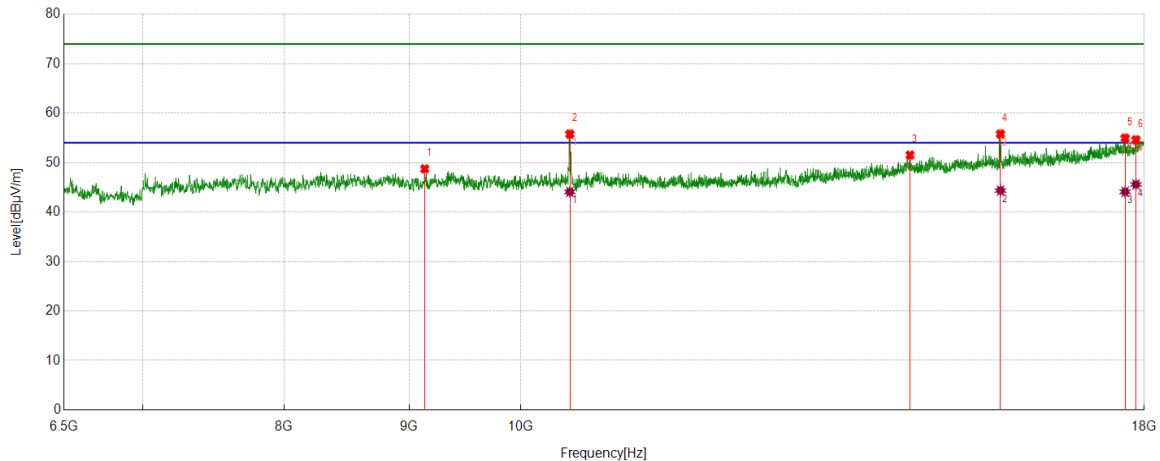

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9133.9390	42.84	5.89	48.73	74.00	-25.27	Horizontal
2	10473.9123	49.09	6.69	55.78	74.00	-18.22	Horizontal
3	14434.4057	38.67	12.87	51.54	74.00	-22.46	Horizontal
4	15718.7865	41.75	14.04	55.79	74.00	-18.21	Horizontal
5	17677.9463	36.84	18.10	54.94	74.00	-19.06	Horizontal
6	17860.0600	35.33	19.27	54.60	74.00	-19.40	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10473.9123	37.39	6.69	44.08	54.00	-9.92	Horizontal
2	15718.7865	30.32	14.04	44.36	54.00	-9.64	Horizontal
3	17677.9463	25.99	18.10	44.09	54.00	-9.91	Horizontal
4	17860.0600	26.32	19.27	45.59	54.00	-8.41	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5240	Vertical	PASS

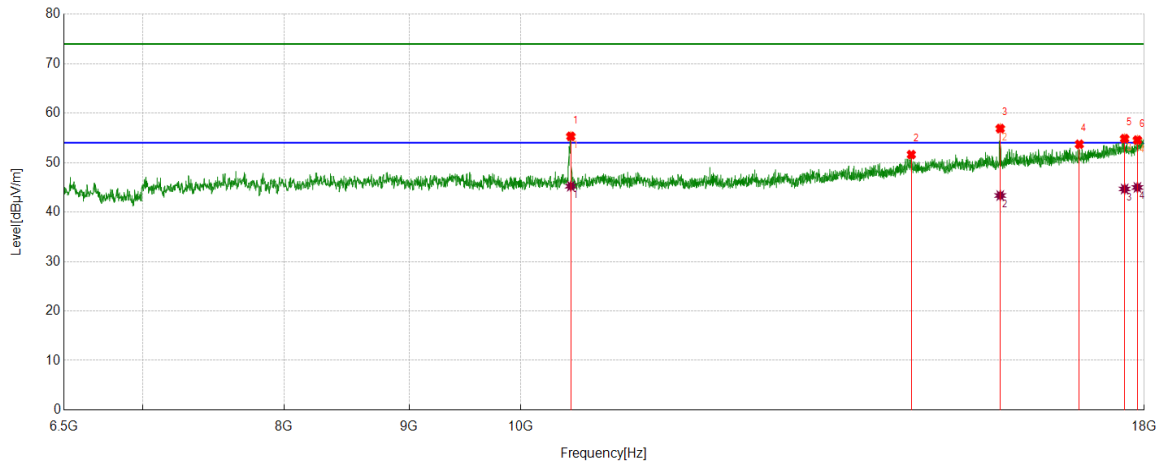

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10483.4972	48.47	6.84	55.31	74.00	-18.69	Vertical
2	14451.6586	38.71	12.91	51.62	74.00	-22.38	Vertical
3	15714.9525	42.84	14.05	56.89	74.00	-17.11	Vertical
4	16932.2387	37.66	16.05	53.71	74.00	-20.29	Vertical
5	17670.2784	36.78	18.07	54.85	74.00	-19.15	Vertical
6	17884.9808	35.32	19.24	54.56	74.00	-19.44	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10483.4972	38.40	6.84	45.24	54.00	-8.76	Vertical
2	15714.9525	29.30	14.05	43.35	54.00	-10.65	Vertical
3	17670.2784	26.60	18.07	44.67	54.00	-9.33	Vertical
4	17884.9808	25.74	19.24	44.98	54.00	-9.02	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5260	Horizontal	PASS

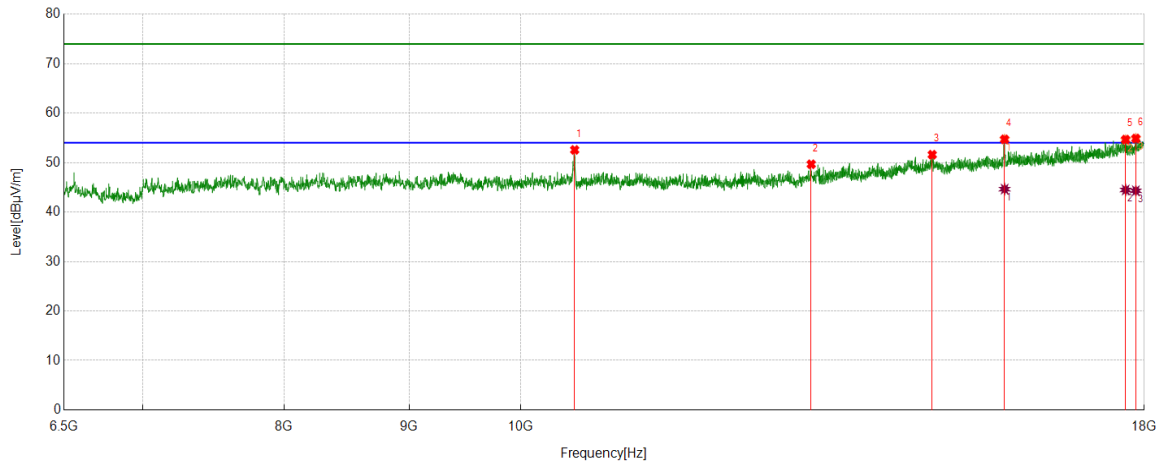

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10521.8370	45.67	6.90	52.57	74.00	-21.43	Horizontal
2	13150.0250	39.86	9.81	49.67	74.00	-24.33	Horizontal
3	14739.2065	38.71	12.89	51.60	74.00	-22.40	Horizontal
4	15780.1300	40.55	14.16	54.71	74.00	-19.29	Horizontal
5	17687.5313	36.49	18.17	54.66	74.00	-19.34	Horizontal
6	17858.1430	35.64	19.24	54.88	74.00	-19.12	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15780.1300	30.48	14.16	44.64	54.00	-9.36	Horizontal
2	17687.5313	26.30	18.17	44.47	54.00	-9.53	Horizontal
3	17858.1430	25.07	19.24	44.31	54.00	-9.69	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5260	Vertical	PASS

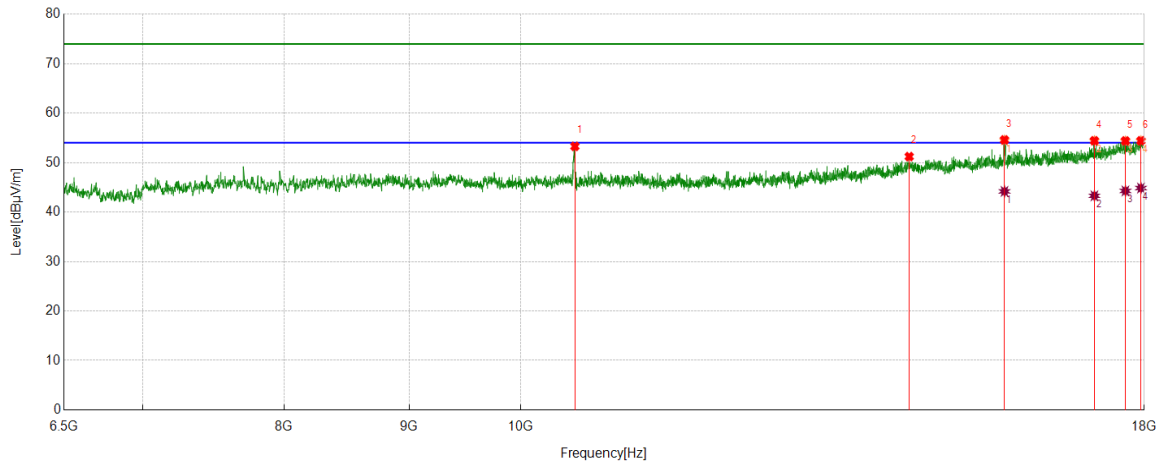

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10523.7540	46.43	6.86	53.29	74.00	-20.71	Vertical
2	14422.9038	38.32	12.90	51.22	74.00	-22.78	Vertical
3	15778.2130	40.41	14.18	54.59	74.00	-19.41	Vertical
4	17173.7790	37.91	16.51	54.42	74.00	-19.58	Vertical
5	17683.6973	36.26	18.13	54.39	74.00	-19.61	Vertical
6	17944.4074	34.96	19.46	54.42	74.00	-19.58	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15778.2130	30.00	14.18	44.18	54.00	-9.82	Vertical
2	17173.7790	26.78	16.51	43.29	54.00	-10.71	Vertical
3	17683.6973	26.15	18.13	44.28	54.00	-9.72	Vertical
4	17944.4074	25.40	19.46	44.86	54.00	-9.14	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5280	Horizontal	PASS

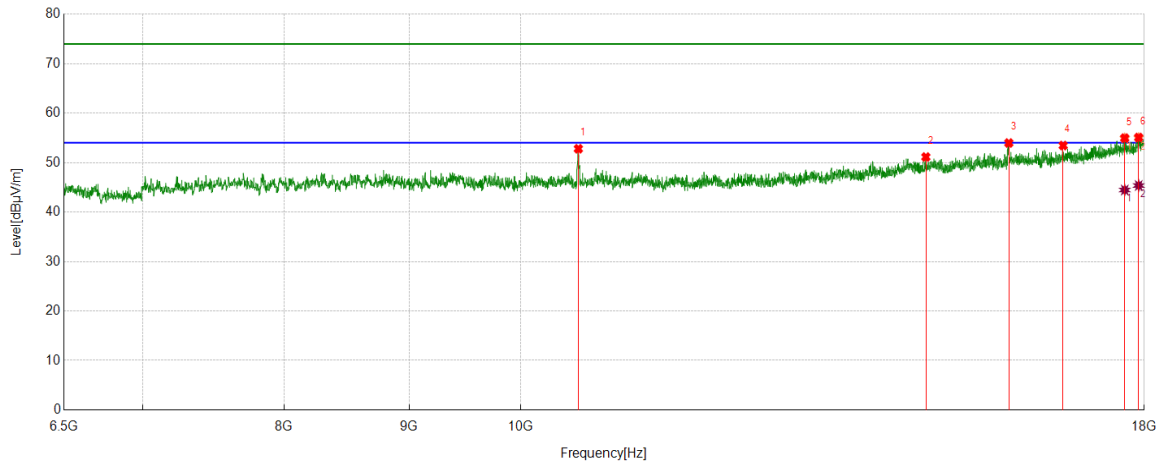

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10558.2597	45.98	6.82	52.80	74.00	-21.20	Horizontal
2	14651.0252	38.37	12.77	51.14	74.00	-22.86	Horizontal
3	15843.3906	39.33	14.64	53.97	74.00	-20.03	Horizontal
4	16675.3626	37.73	15.72	53.45	74.00	-20.55	Horizontal
5	17672.1954	36.88	18.08	54.96	74.00	-19.04	Horizontal
6	17906.0677	35.86	19.22	55.08	74.00	-18.92	Horizontal


#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17672.1954	26.38	18.08	44.46	54.00	-9.54	Horizontal
2	17906.0677	26.15	19.22	45.37	54.00	-8.63	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ac VHT20	5280	Vertical	PASS

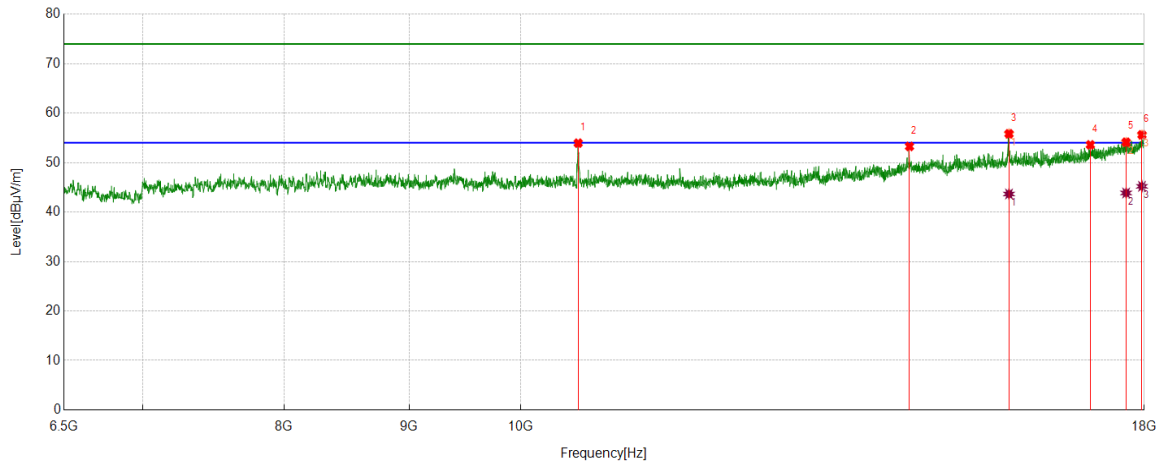

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10556.3427	47.09	6.85	53.94	74.00	-20.06	Vertical
2	14426.7378	40.38	12.89	53.27	74.00	-20.73	Vertical
3	15845.3076	41.14	14.69	55.83	74.00	-18.17	Vertical
4	17108.6014	37.23	16.36	53.59	74.00	-20.41	Vertical
5	17695.1992	35.90	18.23	54.13	74.00	-19.87	Vertical
6	17961.6603	35.99	19.63	55.62	74.00	-18.38	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15845.3076	28.97	14.69	43.66	54.00	-10.34	Vertical
2	17695.1992	25.63	18.23	43.86	54.00	-10.14	Vertical
3	17961.6603	25.58	19.63	45.21	54.00	-8.79	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5320	Horizontal	PASS

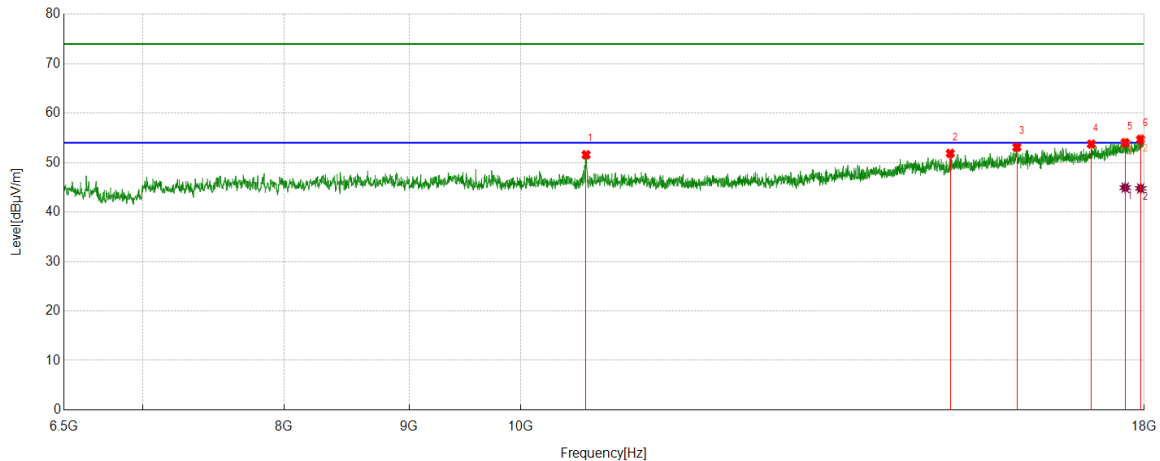

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10634.9392	44.64	6.94	51.58	74.00	-22.42	Horizontal
2	14992.2487	38.99	12.87	51.86	74.00	-22.14	Horizontal
3	15964.1607	38.59	14.52	53.11	74.00	-20.89	Horizontal
4	17123.9373	37.22	16.52	53.74	74.00	-20.26	Horizontal
5	17679.8633	35.90	18.11	54.01	74.00	-19.99	Horizontal
6	17940.5734	35.25	19.45	54.70	74.00	-19.30	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17679.8633	26.83	18.11	44.94	54.00	-9.06	Horizontal
2	17940.5734	25.34	19.45	44.79	54.00	-9.21	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5320	Vertical	PASS

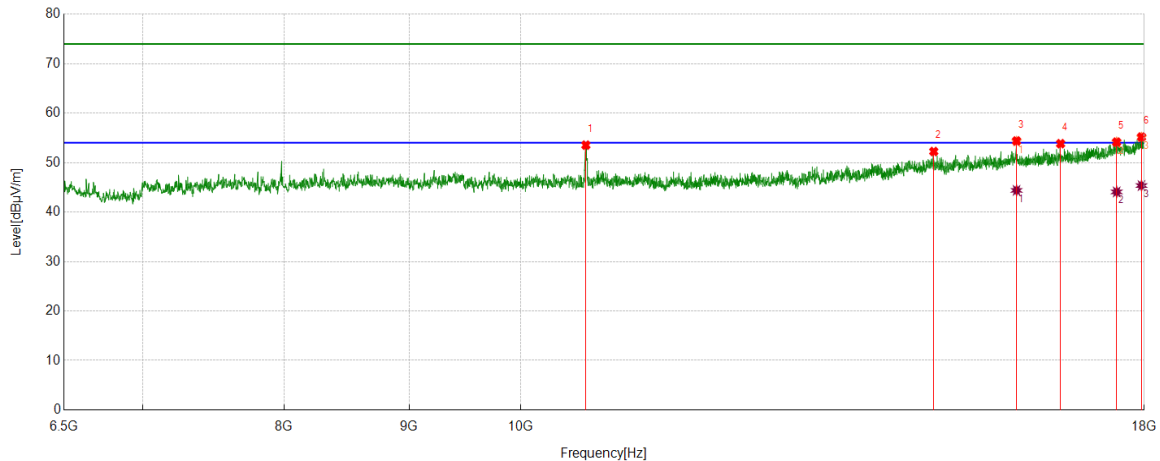

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10633.0222	46.56	6.97	53.53	74.00	-20.47	Vertical
2	14760.2934	39.29	12.96	52.25	74.00	-21.75	Vertical
3	15958.4097	39.83	14.55	54.38	74.00	-19.62	Vertical
4	16635.1059	37.99	15.84	53.83	74.00	-20.17	Vertical
5	17538.0063	36.47	17.67	54.14	74.00	-19.86	Vertical
6	17953.9923	35.64	19.54	55.18	74.00	-18.82	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15958.4097	29.84	14.55	44.39	54.00	-9.61	Vertical
2	17538.0063	26.41	17.67	44.08	54.00	-9.92	Vertical
3	17953.9923	25.82	19.54	45.36	54.00	-8.64	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5500	Horizontal	PASS

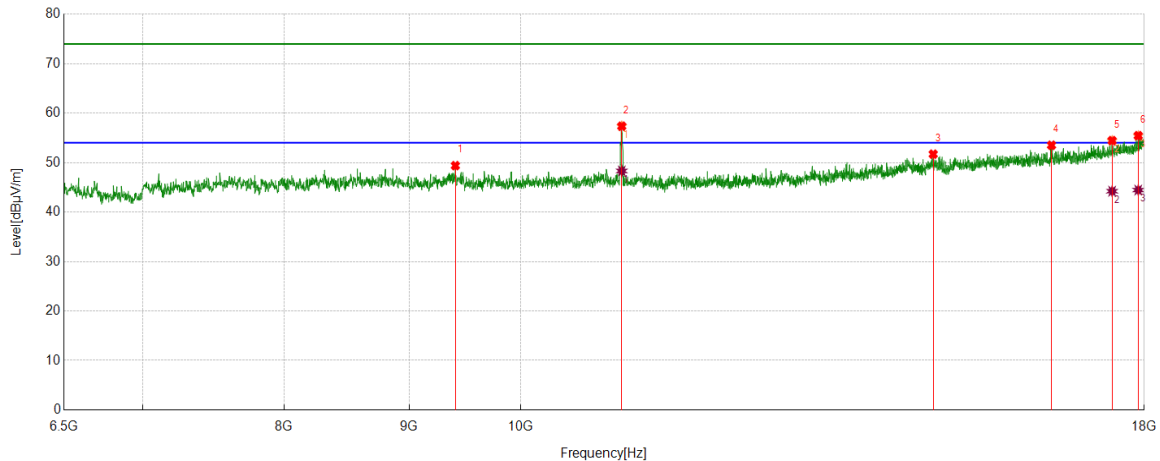

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9402.3171	42.80	6.59	49.39	74.00	-24.61	Horizontal
2	10999.1665	50.08	7.28	57.36	74.00	-16.64	Horizontal
3	14752.6254	38.82	12.89	51.71	74.00	-22.29	Horizontal
4	16493.2489	37.66	15.85	53.51	74.00	-20.49	Horizontal
5	17463.2439	36.83	17.62	54.45	74.00	-19.55	Horizontal
6	17898.3997	36.24	19.21	55.45	74.00	-18.55	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10999.1665	41.03	7.28	48.31	54.00	-5.69	Horizontal
2	17463.2439	26.60	17.62	44.22	54.00	-9.78	Horizontal
3	17898.3997	25.24	19.21	44.45	54.00	-9.55	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5500	Vertical	PASS

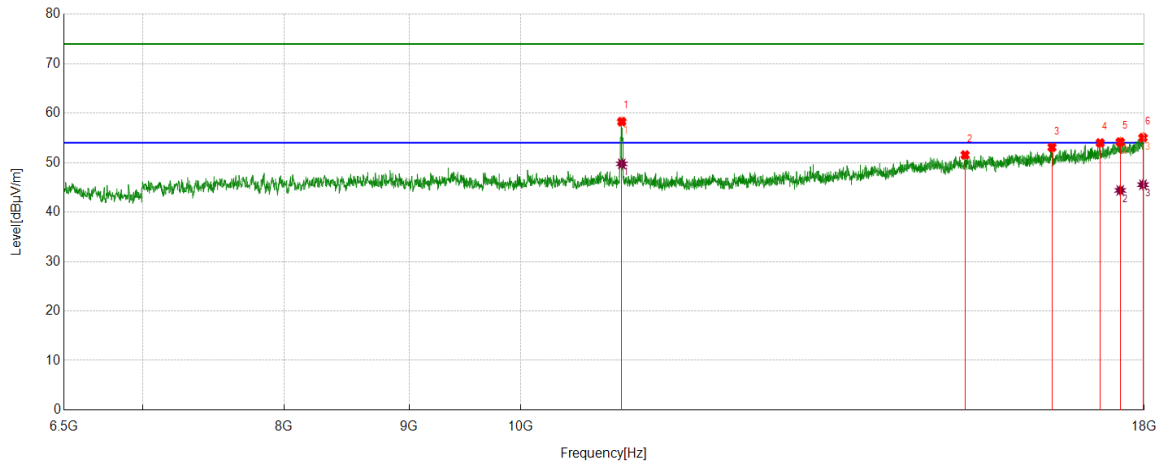

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10999.1665	51.01	7.28	58.29	74.00	-15.71	Vertical
2	15203.1172	38.12	13.43	51.55	74.00	-22.45	Vertical
3	16500.9168	37.35	15.73	53.08	74.00	-20.92	Vertical
4	17267.7113	37.11	16.88	53.99	74.00	-20.01	Vertical
5	17597.4329	36.14	18.03	54.17	74.00	-19.83	Vertical
6	17978.9132	35.25	19.79	55.04	74.00	-18.96	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10999.1665	42.47	7.28	49.75	54.00	-4.25	Vertical
2	17597.4329	26.36	18.03	44.39	54.00	-9.61	Vertical
3	17978.9132	25.74	19.79	45.53	54.00	-8.47	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5580	Horizontal	PASS

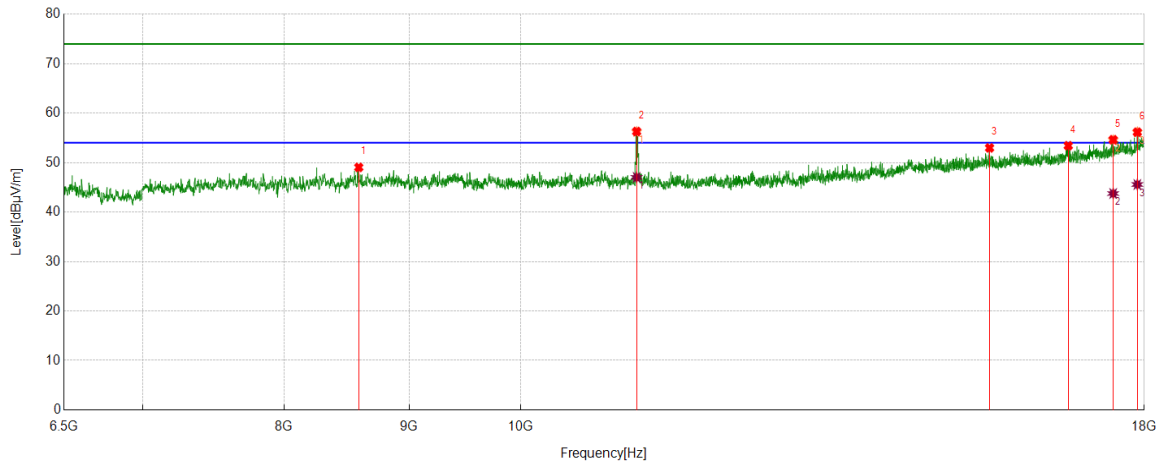

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8583.7640	42.80	6.24	49.04	74.00	-24.96	Horizontal
2	11154.4424	48.98	7.31	56.29	74.00	-17.71	Horizontal
3	15557.7596	39.28	13.69	52.97	74.00	-21.03	Horizontal
4	16755.8760	37.22	16.20	53.42	74.00	-20.58	Horizontal
5	17480.4967	36.98	17.65	54.63	74.00	-19.37	Horizontal
6	17883.0638	36.94	19.22	56.16	74.00	-17.84	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11154.4424	39.71	7.31	47.02	54.00	-6.98	Horizontal
2	17480.4967	26.10	17.65	43.75	54.00	-10.25	Horizontal
3	17883.0638	26.35	19.22	45.57	54.00	-8.43	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5580	Vertical	PASS

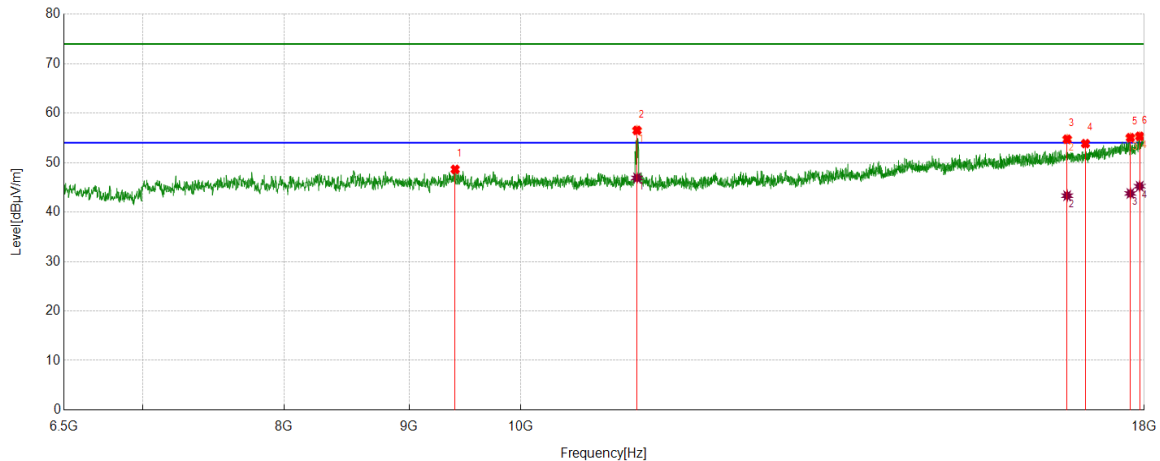

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9400.4001	42.02	6.61	48.63	74.00	-25.37	Vertical
2	11158.2764	49.28	7.24	56.52	74.00	-17.48	Vertical
3	16738.6231	38.79	15.94	54.73	74.00	-19.27	Vertical
4	17030.0050	37.71	16.13	53.84	74.00	-20.16	Vertical
5	17766.1277	36.45	18.59	55.04	74.00	-18.96	Vertical
6	17923.3206	35.96	19.36	55.32	74.00	-18.68	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11158.2764	39.67	7.24	46.91	54.00	-7.09	Vertical
2	16738.6231	27.37	15.94	43.31	54.00	-10.69	Vertical
3	17766.1277	25.18	18.59	43.77	54.00	-10.23	Vertical
4	17923.3206	25.86	19.36	45.22	54.00	-8.78	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5700	Horizontal	PASS

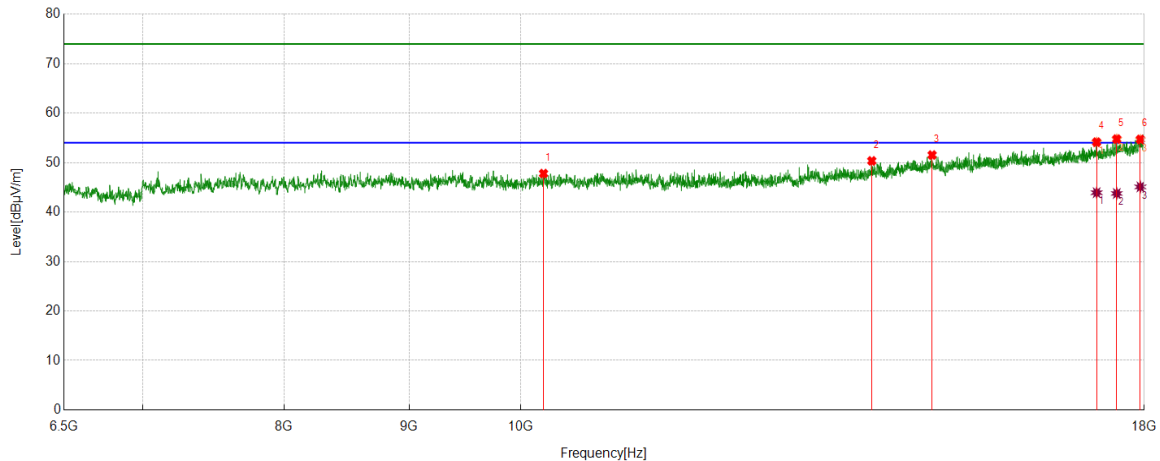

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10217.0362	41.08	6.71	47.79	74.00	-26.21	Horizontal
2	13922.5704	38.96	11.39	50.35	74.00	-23.65	Horizontal
3	14737.2895	38.67	12.87	51.54	74.00	-22.46	Horizontal
4	17210.2017	37.36	16.78	54.14	74.00	-19.86	Horizontal
5	17539.9233	37.06	17.70	54.76	74.00	-19.24	Horizontal
6	17934.8225	35.30	19.40	54.70	74.00	-19.30	Horizontal


#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17210.2017	27.14	16.78	43.92	54.00	-10.08	Horizontal
2	17539.9233	26.06	17.70	43.76	54.00	-10.24	Horizontal
3	17934.8225	25.69	19.40	45.09	54.00	-8.91	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ac VHT20	5700	Vertical	PASS

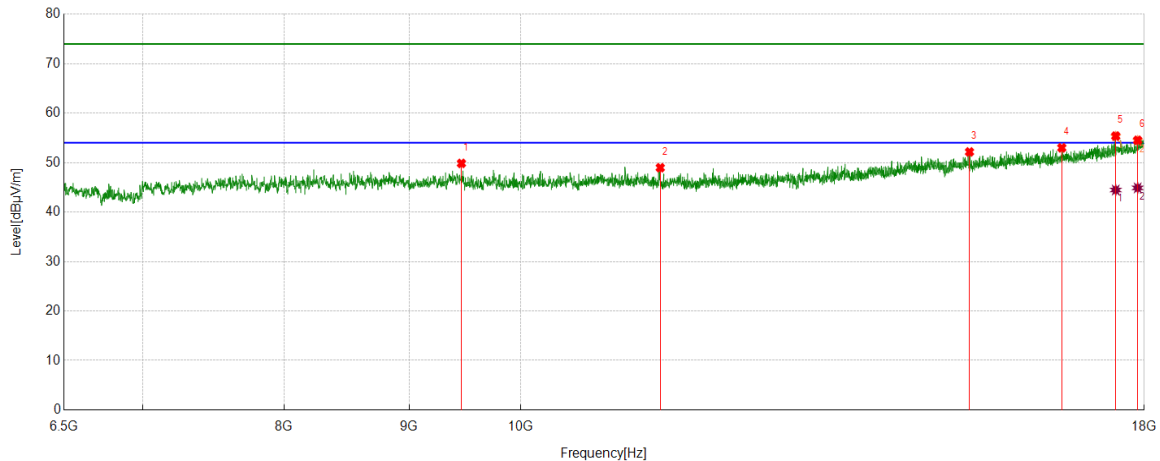

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9455.9927	43.28	6.57	49.85	74.00	-24.15	Vertical
2	11405.5676	41.53	7.44	48.97	74.00	-25.03	Vertical
3	15266.3777	38.72	13.44	52.16	74.00	-21.84	Vertical
4	16654.2757	37.33	15.66	52.99	74.00	-21.01	Vertical
5	17522.6704	37.76	17.61	55.37	74.00	-18.63	Vertical
6	17888.8148	35.21	19.30	54.51	74.00	-19.49	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17522.6704	26.85	17.61	44.46	54.00	-9.54	Vertical
2	17888.8148	25.59	19.30	44.89	54.00	-9.11	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5720	Horizontal	PASS

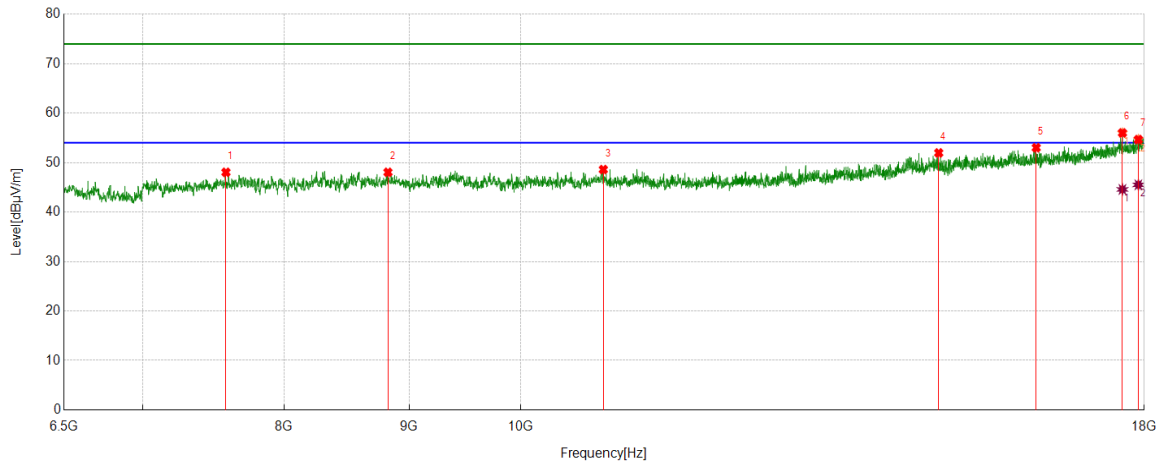

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7573.5123	43.21	4.83	48.04	74.00	-25.96	Horizontal
2	8823.3872	41.79	6.25	48.04	74.00	-25.96	Horizontal
3	10809.3849	41.70	6.90	48.60	74.00	-25.40	Horizontal
4	14829.3049	39.08	12.88	51.96	74.00	-22.04	Horizontal
5	16257.4596	37.84	15.17	53.01	74.00	-20.99	Horizontal
6	17633.8556	37.98	18.03	56.01	74.00	-17.99	Horizontal
7	17900.3167	35.48	19.18	54.66	74.00	-19.34	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17633.8556	26.55	18.03	44.58	54.00	-9.42	Horizontal
2	17900.3167	26.33	19.18	45.51	54.00	-8.49	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5720	Vertical	PASS

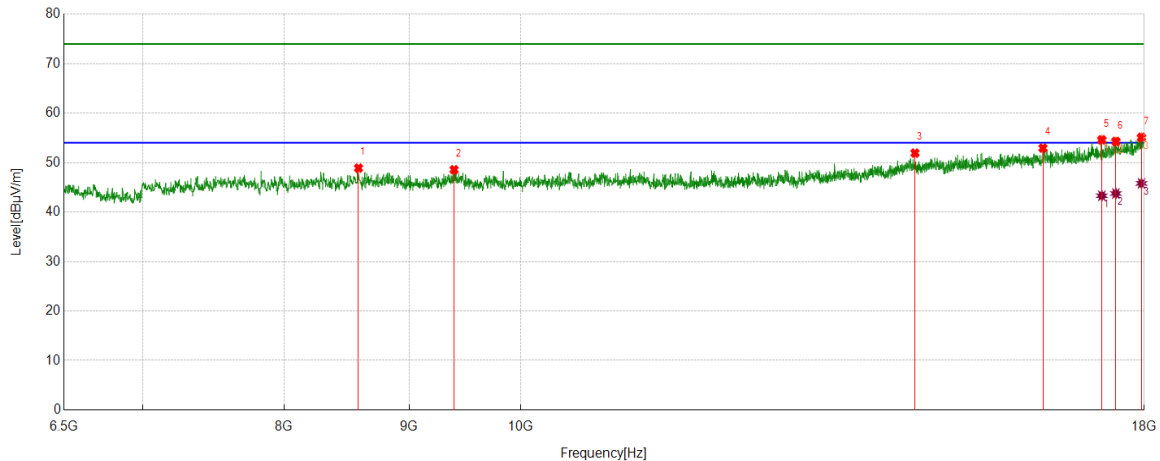

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8581.8470	42.54	6.35	48.89	74.00	-25.11	Vertical
2	9390.8151	42.01	6.55	48.56	74.00	-25.44	Vertical
3	14501.5002	39.12	12.80	51.92	74.00	-22.08	Vertical
4	16360.9768	37.91	15.02	52.93	74.00	-21.07	Vertical
5	17294.5491	37.58	17.03	54.61	74.00	-19.39	Vertical
6	17524.5874	36.69	17.59	54.28	74.00	-19.72	Vertical
7	17953.9923	35.57	19.54	55.11	74.00	-18.89	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17294.5491	26.27	17.03	43.30	54.00	-10.70	Vertical
2	17524.5874	26.16	17.59	43.75	54.00	-10.25	Vertical
3	17953.9923	26.26	19.54	45.80	54.00	-8.20	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5745	Horizontal	PASS

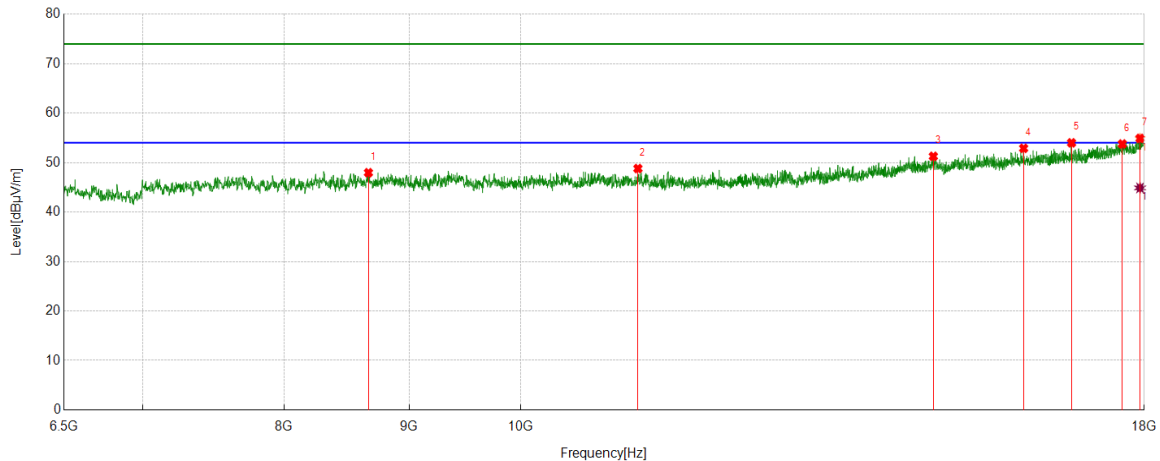

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8662.3604	41.60	6.36	47.96	74.00	-26.04	Horizontal
2	11167.8613	41.54	7.26	48.80	74.00	-25.20	Horizontal
3	14754.5424	38.36	12.91	51.27	74.00	-22.73	Horizontal
4	16065.7610	38.34	14.55	52.89	74.00	-21.11	Horizontal
5	16807.6346	37.70	16.30	54.00	74.00	-20.00	Horizontal
6	17631.9387	35.73	18.04	53.77	74.00	-20.23	Horizontal
7	17929.0715	35.53	19.37	54.90	74.00	-19.10	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17929.0715	25.52	19.37	44.89	54.00	-9.11	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5745	Vertical	PASS

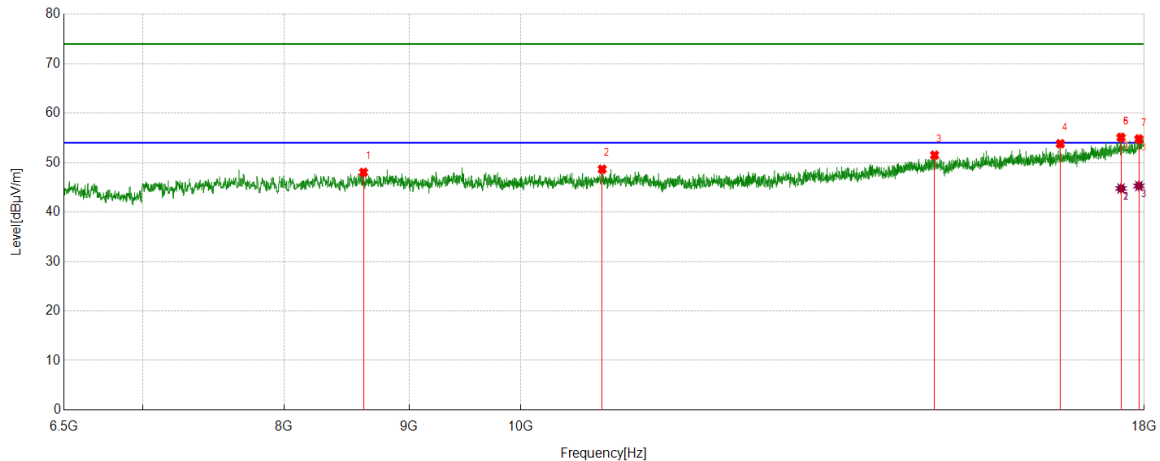

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8622.1037	41.91	6.12	48.03	74.00	-25.97	Vertical
2	10797.8830	41.65	7.01	48.66	74.00	-25.34	Vertical
3	14771.7953	38.60	12.91	51.51	74.00	-22.49	Vertical
4	16631.2719	38.01	15.81	53.82	74.00	-20.18	Vertical
5	17610.8518	37.04	18.06	55.10	74.00	-18.90	Vertical
6	17610.8518	37.04	18.06	55.10	74.00	-18.90	Vertical
7	17909.9016	35.51	19.25	54.76	74.00	-19.24	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17610.8518	26.71	18.06	44.77	54.00	-9.23	Vertical
2	17610.8518	26.72	18.06	44.78	54.00	-9.22	Vertical
3	17909.9016	26.03	19.25	45.28	54.00	-8.72	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5785	Horizontal	PASS

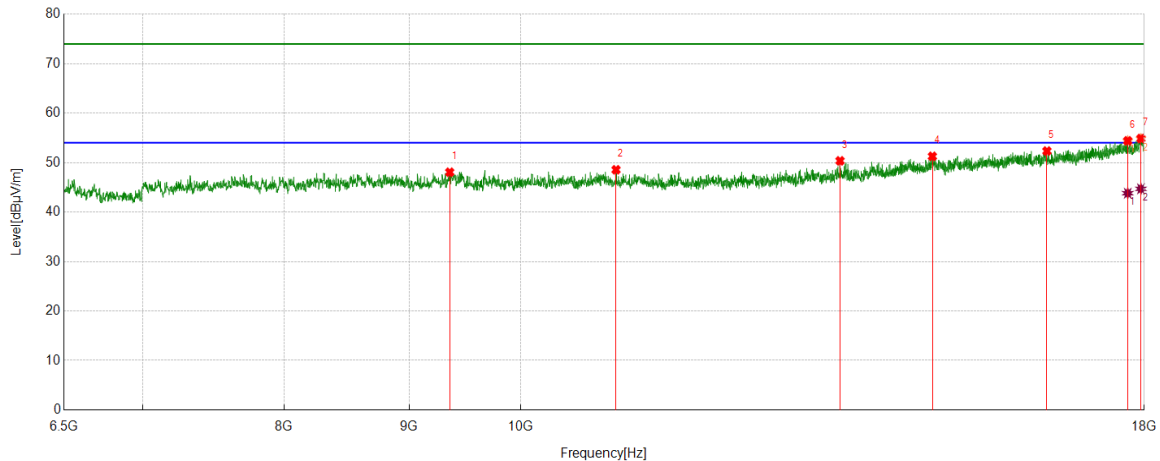

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9352.4754	41.61	6.45	48.06	74.00	-25.94	Horizontal
2	10939.7400	41.28	7.27	48.55	74.00	-25.45	Horizontal
3	13512.3354	39.57	10.79	50.36	74.00	-23.64	Horizontal
4	14741.1235	38.37	12.90	51.27	74.00	-22.73	Horizontal
5	16422.3204	37.11	15.23	52.34	74.00	-21.66	Horizontal
6	17722.0370	35.92	18.49	54.41	74.00	-19.59	Horizontal
7	17944.4074	35.42	19.46	54.88	74.00	-19.12	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17722.0370	25.32	18.49	43.81	54.00	-10.19	Horizontal
2	17944.4074	25.24	19.46	44.70	54.00	-9.30	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5785	Vertical	PASS

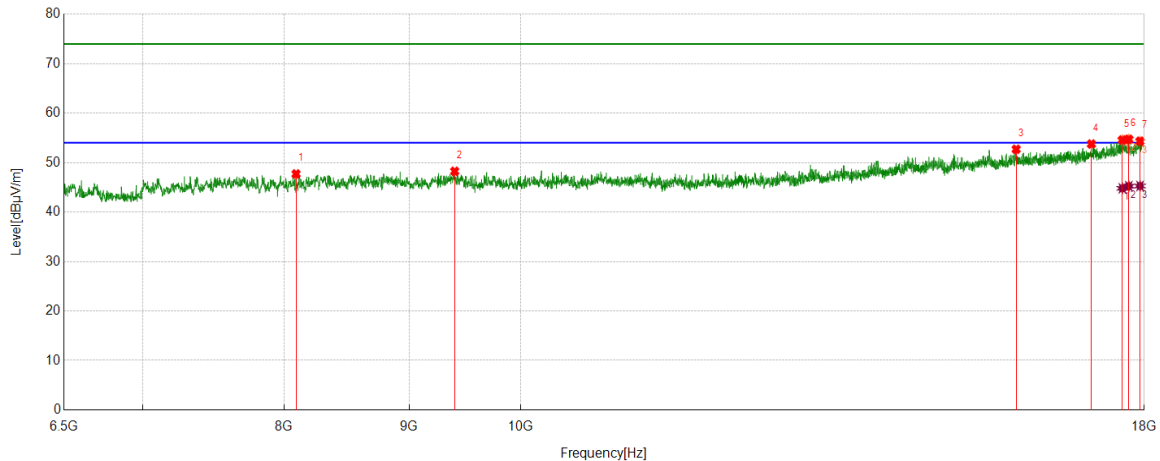

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8091.0985	42.32	5.39	47.71	74.00	-26.29	Vertical
2	9396.5661	41.66	6.59	48.25	74.00	-25.75	Vertical
3	15952.6588	38.23	14.47	52.70	74.00	-21.30	Vertical
4	17125.8543	37.21	16.55	53.76	74.00	-20.24	Vertical
5	17631.9387	36.54	18.04	54.58	74.00	-19.42	Vertical
6	17739.2899	36.19	18.54	54.73	74.00	-19.27	Vertical
7	17929.0715	34.96	19.37	54.33	74.00	-19.67	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17631.9387	26.76	18.04	44.80	54.00	-9.20	Vertical
2	17739.2899	26.70	18.54	45.24	54.00	-8.76	Vertical
3	17929.0715	25.90	19.37	45.27	54.00	-8.73	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5825	Horizontal	PASS

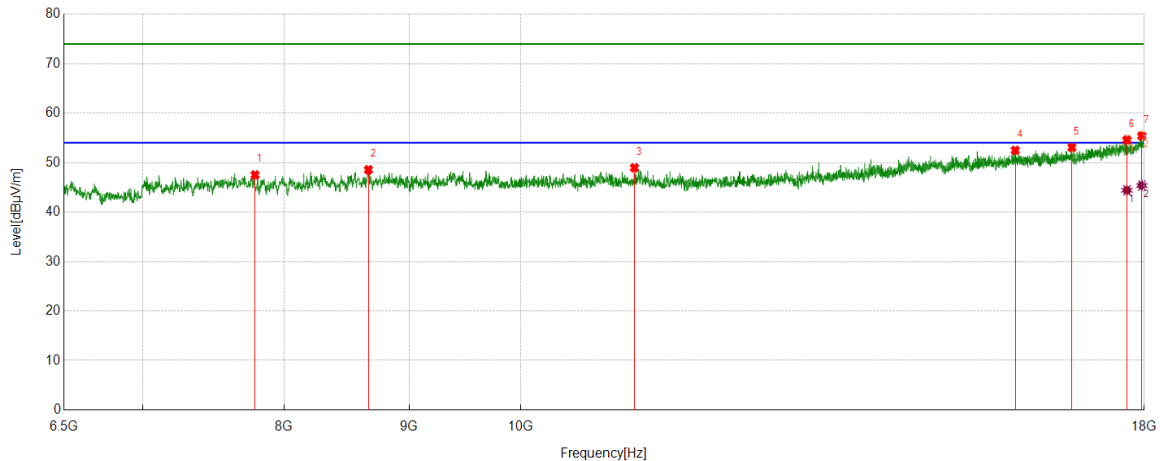

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7784.3807	42.34	5.17	47.51	74.00	-26.49	Horizontal
2	8662.3604	42.20	6.36	48.56	74.00	-25.44	Horizontal
3	11131.4386	41.68	7.27	48.95	74.00	-25.05	Horizontal
4	15939.2399	37.95	14.53	52.48	74.00	-21.52	Horizontal
5	16813.3856	36.81	16.26	53.07	74.00	-20.93	Horizontal
6	17708.6181	36.23	18.35	54.58	74.00	-19.42	Horizontal
7	17959.7433	35.78	19.63	55.41	74.00	-18.59	Horizontal


#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17708.6181	26.06	18.35	44.41	54.00	-9.59	Horizontal
2	17959.7433	25.75	19.63	45.38	54.00	-8.62	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ac VHT20	5825	Vertical	PASS

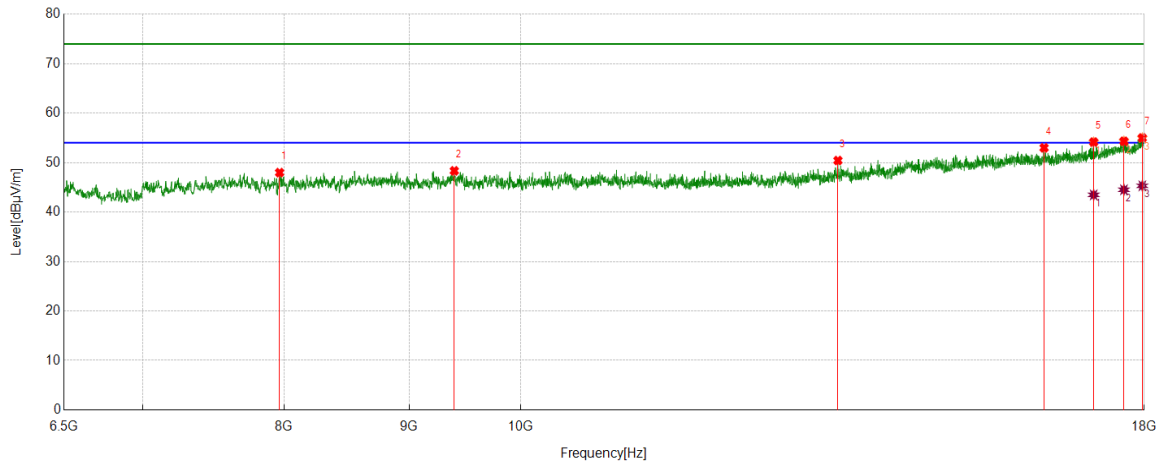

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7966.4944	42.39	5.59	47.98	74.00	-26.02	Vertical
2	9392.7321	41.77	6.57	48.34	74.00	-25.66	Vertical
3	13485.4976	39.81	10.62	50.43	74.00	-23.57	Vertical
4	16378.2297	37.92	15.07	52.99	74.00	-21.01	Vertical
5	17162.2770	37.70	16.46	54.16	74.00	-19.84	Vertical
6	17658.7765	36.25	18.07	54.32	74.00	-19.68	Vertical
7	17967.4112	35.36	19.63	54.99	74.00	-19.01	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17162.2770	27.02	16.46	43.48	54.00	-10.52	Vertical
2	17658.7765	26.44	18.07	44.51	54.00	-9.49	Vertical
3	17967.4112	25.68	19.63	45.31	54.00	-8.69	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Horizontal	PASS

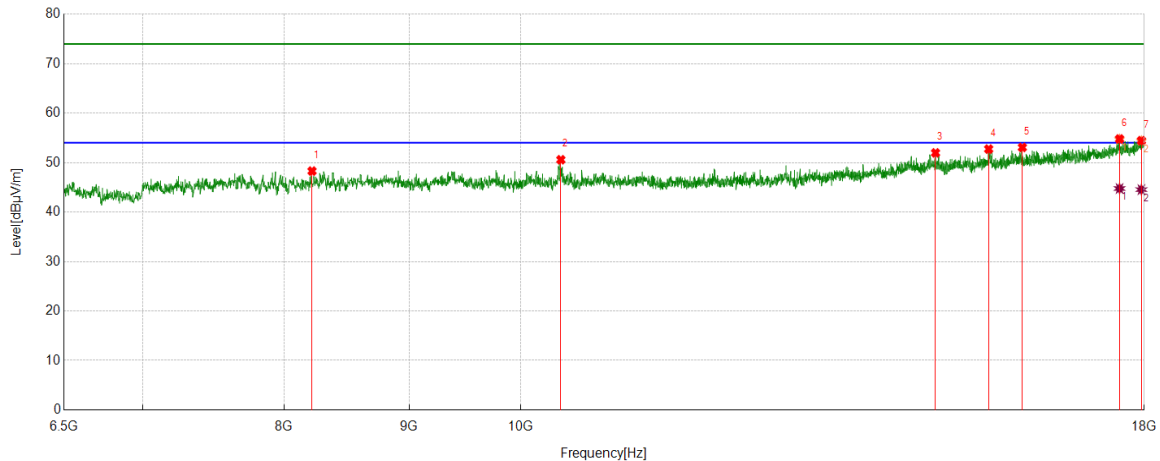

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8213.7856	42.32	5.97	48.29	74.00	-25.71	Horizontal
2	10385.7310	43.98	6.60	50.58	74.00	-23.42	Horizontal
3	14785.2142	39.11	12.86	51.97	74.00	-22.03	Horizontal
4	15544.3407	38.95	13.79	52.74	74.00	-21.26	Horizontal
5	16046.5911	38.61	14.46	53.07	74.00	-20.93	Horizontal
6	17585.9310	36.77	18.01	54.78	74.00	-19.22	Horizontal
7	17952.0753	34.92	19.52	54.44	74.00	-19.56	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17585.9310	26.75	18.01	44.76	54.00	-9.24	Horizontal
2	17952.0753	25.02	19.52	44.54	54.00	-9.46	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Vertical	PASS

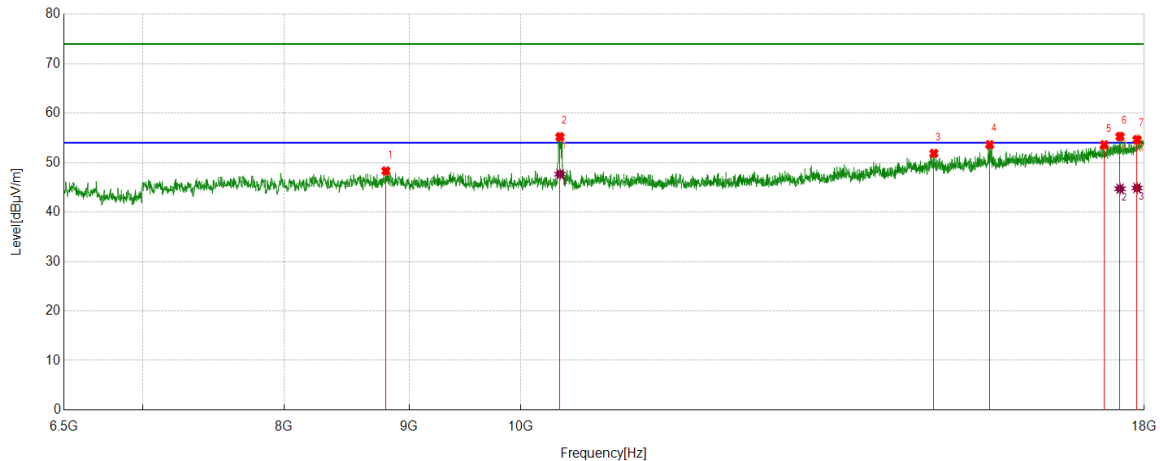

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8806.1344	42.04	6.27	48.31	74.00	-25.69	Vertical
2	10376.1460	48.58	6.62	55.20	74.00	-18.80	Vertical
3	14762.2104	38.91	12.95	51.86	74.00	-22.14	Vertical
4	15559.6766	39.95	13.67	53.62	74.00	-20.38	Vertical
5	17334.8058	36.45	17.15	53.60	74.00	-20.40	Vertical
6	17593.5989	37.24	18.04	55.28	74.00	-18.72	Vertical
7	17879.2299	35.46	19.18	54.64	74.00	-19.36	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10376.1460	41.05	6.62	47.67	54.00	-6.33	Vertical
2	17593.5989	26.68	18.04	44.72	54.00	-9.28	Vertical
3	17879.2299	25.69	19.18	44.87	54.00	-9.13	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Horizontal	PASS

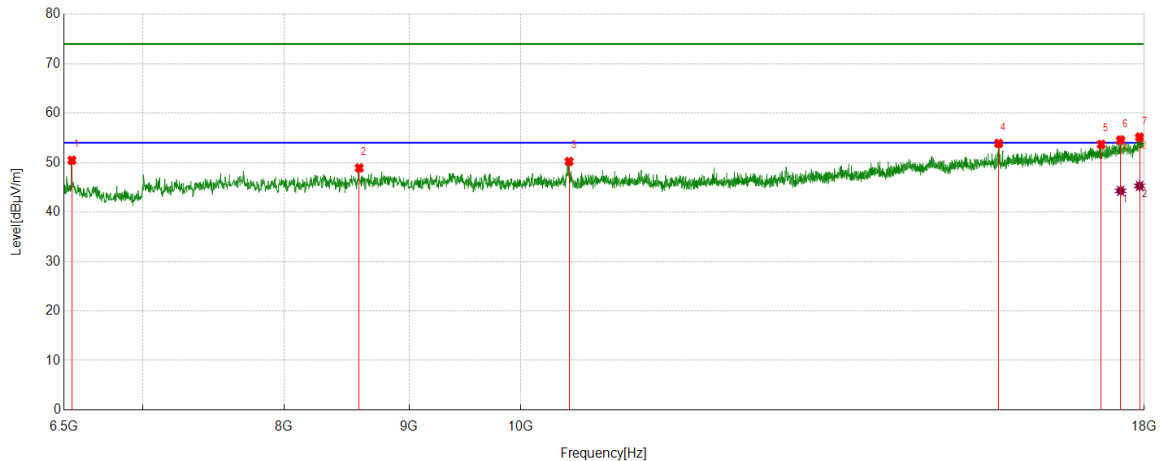

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6549.8416	47.22	3.26	50.48	74.00	-23.52	Horizontal
2	8587.5979	42.89	6.03	48.92	74.00	-25.08	Horizontal
3	10466.2444	43.56	6.67	50.23	74.00	-23.77	Horizontal
4	15691.9487	40.03	13.86	53.89	74.00	-20.11	Horizontal
5	17284.9642	36.74	16.95	53.69	74.00	-20.31	Horizontal
6	17603.1839	36.52	18.04	54.56	74.00	-19.44	Horizontal
7	17921.4036	35.78	19.36	55.14	74.00	-18.86	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17603.1839	26.25	18.04	44.29	54.00	-9.71	Horizontal
2	17921.4036	25.92	19.36	45.28	54.00	-8.72	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Vertical	PASS

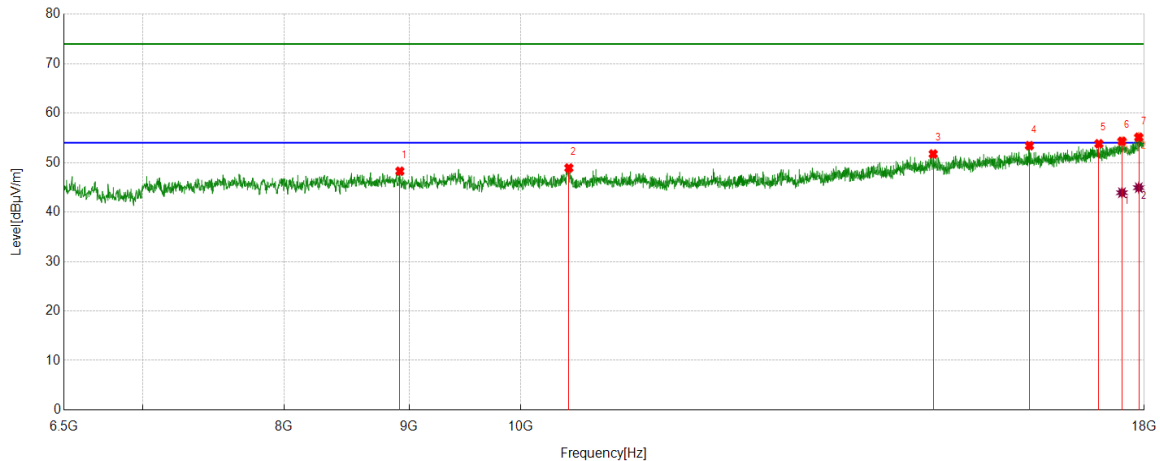

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8923.0705	42.06	6.20	48.26	74.00	-25.74	Vertical
2	10464.3274	42.23	6.68	48.91	74.00	-25.09	Vertical
3	14752.6254	38.85	12.89	51.74	74.00	-22.26	Vertical
4	16153.9423	38.52	14.90	53.42	74.00	-20.58	Vertical
5	17246.6244	37.04	16.77	53.81	74.00	-20.19	Vertical
6	17626.1877	36.26	18.06	54.32	74.00	-19.68	Vertical
7	17907.9847	35.90	19.23	55.13	74.00	-18.87	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17626.1877	25.86	18.06	43.92	54.00	-10.08	Vertical
2	17907.9847	25.70	19.23	44.93	54.00	-9.07	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Horizontal	PASS

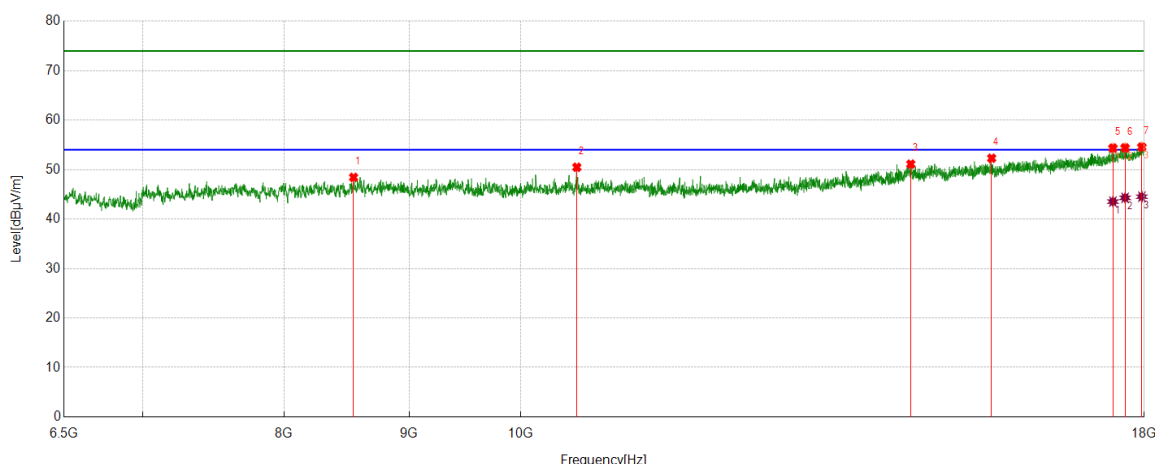

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8541.5903	42.27	6.16	48.43	74.00	-25.57	Horizontal
2	10542.9238	43.61	6.87	50.48	74.00	-23.52	Horizontal
3	14443.9907	38.22	12.89	51.11	74.00	-22.89	Horizontal
4	15588.4314	38.65	13.65	52.30	74.00	-21.70	Horizontal
5	17476.6628	36.71	17.65	54.36	74.00	-19.64	Horizontal
6	17677.9463	36.30	18.10	54.40	74.00	-19.60	Horizontal
7	17959.7433	34.95	19.63	54.58	74.00	-19.42	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17476.6628	25.88	17.65	43.53	54.00	-10.47	Horizontal
2	17677.9463	26.20	18.10	44.30	54.00	-9.70	Horizontal
3	17959.7433	24.89	19.63	44.52	54.00	-9.48	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Vertical	PASS

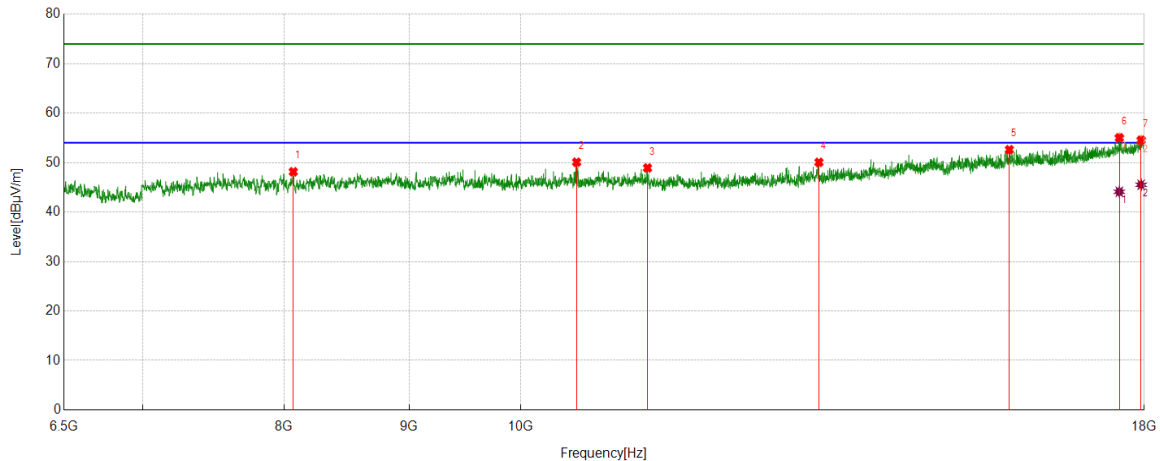

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8070.0117	42.45	5.70	48.15	74.00	-25.85	Vertical
2	10541.0068	43.24	6.85	50.09	74.00	-23.91	Vertical
3	11269.4616	41.70	7.22	48.92	74.00	-25.08	Vertical
4	13245.8743	39.94	10.12	50.06	74.00	-23.94	Vertical
5	15851.0585	37.79	14.83	52.62	74.00	-21.38	Vertical
6	17582.0970	37.05	17.97	55.02	74.00	-18.98	Vertical
7	17948.2414	35.07	19.48	54.55	74.00	-19.45	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17582.0970	26.13	17.97	44.10	54.00	-9.90	Vertical
2	17948.2414	26.04	19.48	45.52	54.00	-8.48	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Horizontal	PASS

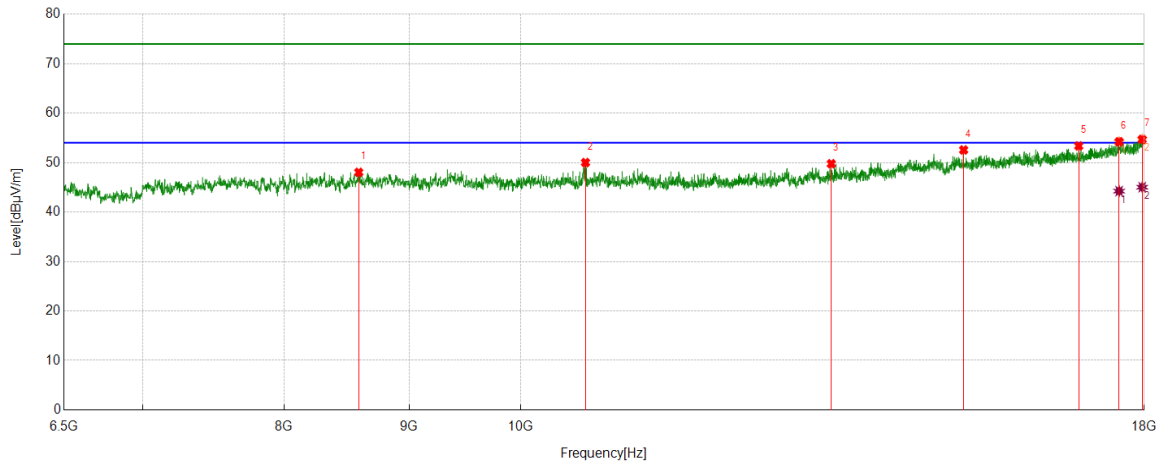

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8583.7640	41.79	6.24	48.03	74.00	-25.97	Horizontal
2	10629.1882	43.00	7.01	50.01	74.00	-23.99	Horizontal
3	13401.1502	39.64	10.13	49.77	74.00	-24.23	Horizontal
4	15182.0303	39.22	13.34	52.56	74.00	-21.44	Horizontal
5	16922.6538	37.27	16.10	53.37	74.00	-20.63	Horizontal
6	17578.2630	36.28	17.94	54.22	74.00	-19.78	Horizontal
7	17965.4942	35.07	19.63	54.70	74.00	-19.30	Horizontal


#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17578.2630	26.30	17.94	44.24	54.00	-9.76	Horizontal
2	17965.4942	25.40	19.63	45.03	54.00	-8.97	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Vertical	PASS

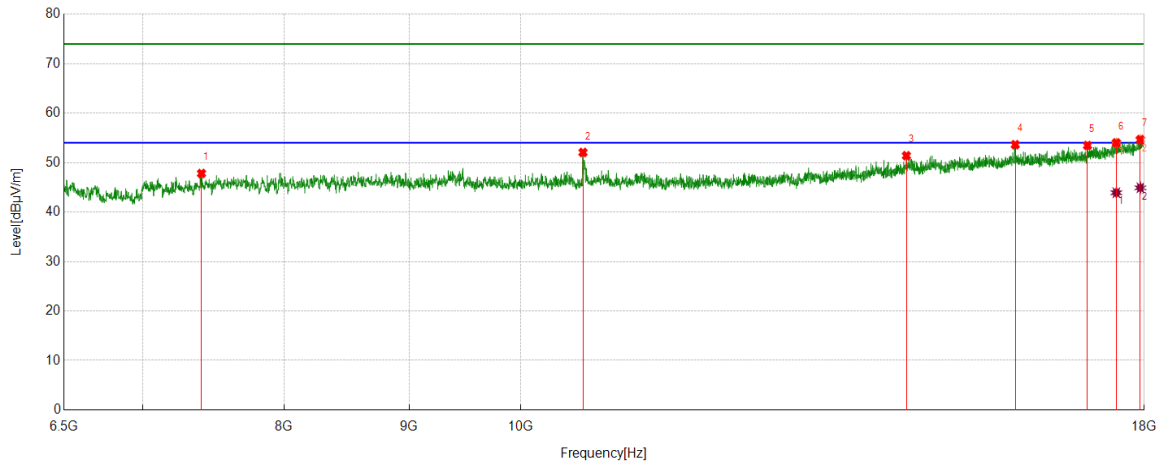

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7400.9835	43.55	4.26	47.81	74.00	-26.19	Vertical
2	10604.2674	45.02	7.04	52.06	74.00	-21.94	Vertical
3	14384.5641	38.65	12.75	51.40	74.00	-22.60	Vertical
4	15939.2399	39.10	14.53	53.63	74.00	-20.37	Vertical
5	17062.5938	37.20	16.26	53.46	74.00	-20.54	Vertical
6	17532.2554	36.39	17.60	53.99	74.00	-20.01	Vertical
7	17934.8225	35.25	19.40	54.65	74.00	-19.35	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17532.2554	26.31	17.60	43.91	54.00	-10.09	Vertical
2	17934.8225	25.51	19.40	44.91	54.00	-9.09	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Horizontal	PASS

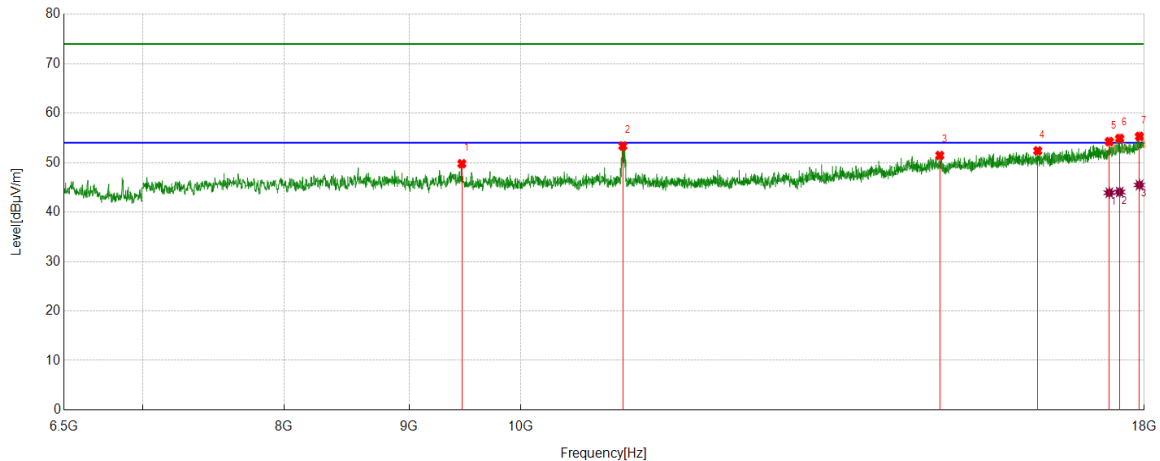

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9459.8266	43.23	6.55	49.78	74.00	-24.22	Horizontal
2	11010.6684	46.10	7.26	53.36	74.00	-20.64	Horizontal
3	14844.6408	38.60	12.86	51.46	74.00	-22.54	Horizontal
4	16280.4634	37.16	15.22	52.38	74.00	-21.62	Horizontal
5	17417.2362	36.87	17.38	54.25	74.00	-19.75	Horizontal
6	17587.8480	36.88	18.02	54.90	74.00	-19.10	Horizontal
7	17919.4866	35.94	19.36	55.30	74.00	-18.70	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17417.2362	26.52	17.38	43.90	54.00	-10.10	Horizontal
2	17587.8480	26.03	18.02	44.05	54.00	-9.95	Horizontal
3	17919.4866	26.11	19.36	45.47	54.00	-8.53	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Vertical	PASS

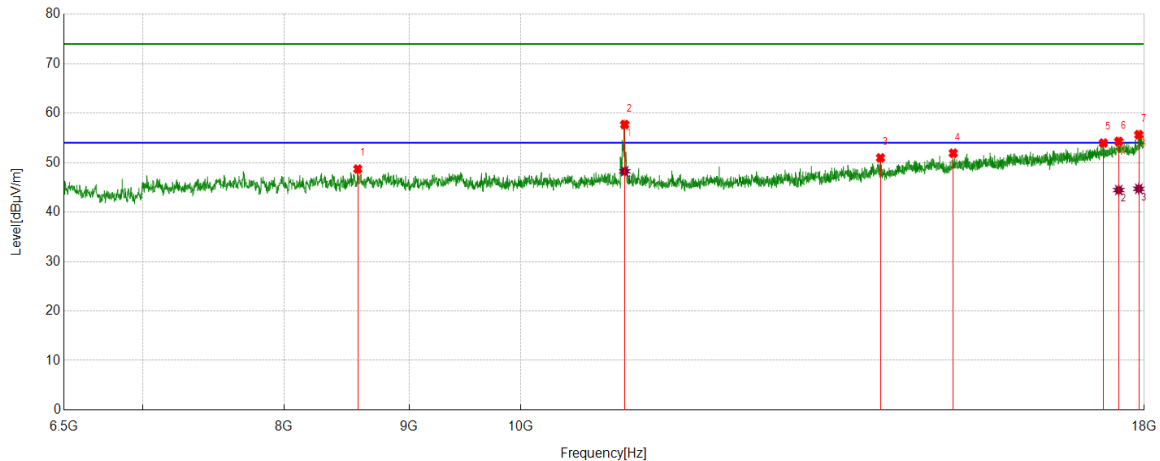

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8576.0960	42.34	6.36	48.70	74.00	-25.30	Vertical
2	11029.8383	50.43	7.28	57.71	74.00	-16.29	Vertical
3	14037.5896	39.05	11.91	50.96	74.00	-23.04	Vertical
4	15034.4224	38.90	13.00	51.90	74.00	-22.10	Vertical
5	17319.4699	36.89	17.07	53.96	74.00	-20.04	Vertical
6	17572.5121	36.36	17.92	54.28	74.00	-19.72	Vertical
7	17907.9847	36.42	19.23	55.65	74.00	-18.35	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11029.8383	40.96	7.28	48.24	54.00	-5.76	Vertical
2	17572.5121	26.53	17.92	44.45	54.00	-9.55	Vertical
3	17907.9847	25.48	19.23	44.71	54.00	-9.29	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. AVG: VBW refer to section 6.2.  
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.  
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.