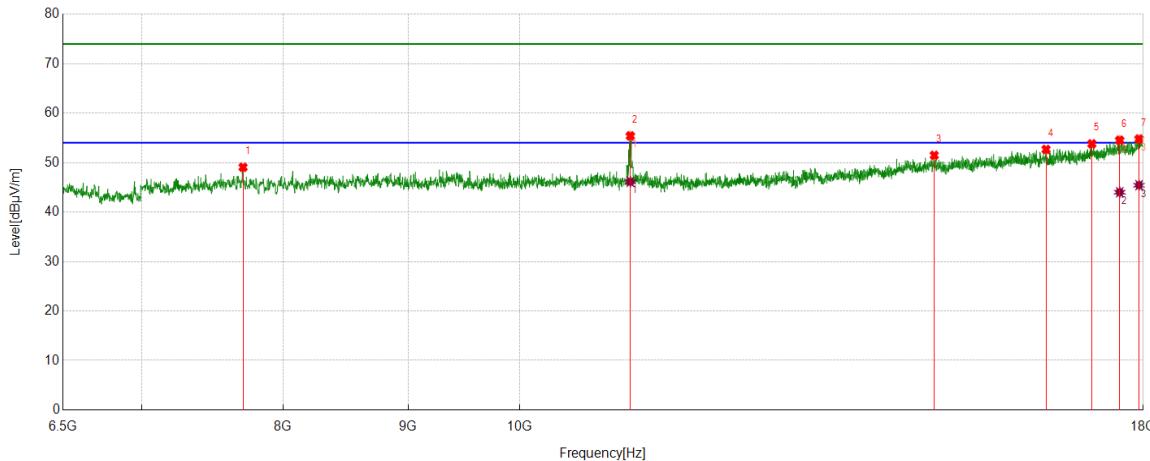


Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7703.8673	43.62	5.44	49.06	74.00	-24.94	Horizontal
2	11098.8498	48.06	7.35	55.41	74.00	-18.59	Horizontal
3	14781.3802	38.64	12.84	51.48	74.00	-22.52	Horizontal
4	16424.2374	37.39	15.28	52.67	74.00	-21.33	Horizontal
5	17148.8581	37.35	16.45	53.80	74.00	-20.20	Horizontal
6	17605.1008	36.48	18.05	54.53	74.00	-19.47	Horizontal
7	17929.0715	35.40	19.37	54.77	74.00	-19.23	Horizontal

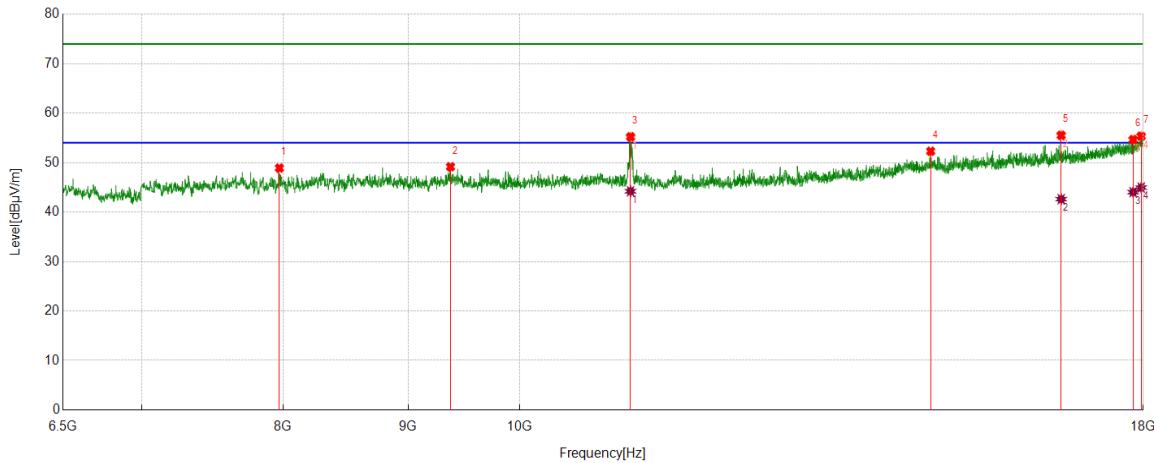
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11098.8498	38.78	7.35	46.13	54.00	-7.87	Horizontal
2	17605.1008	25.96	18.05	44.01	54.00	-9.99	Horizontal
3	17929.0715	26.06	19.37	45.43	54.00	-8.57	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Vertical	PASS


PK Result:

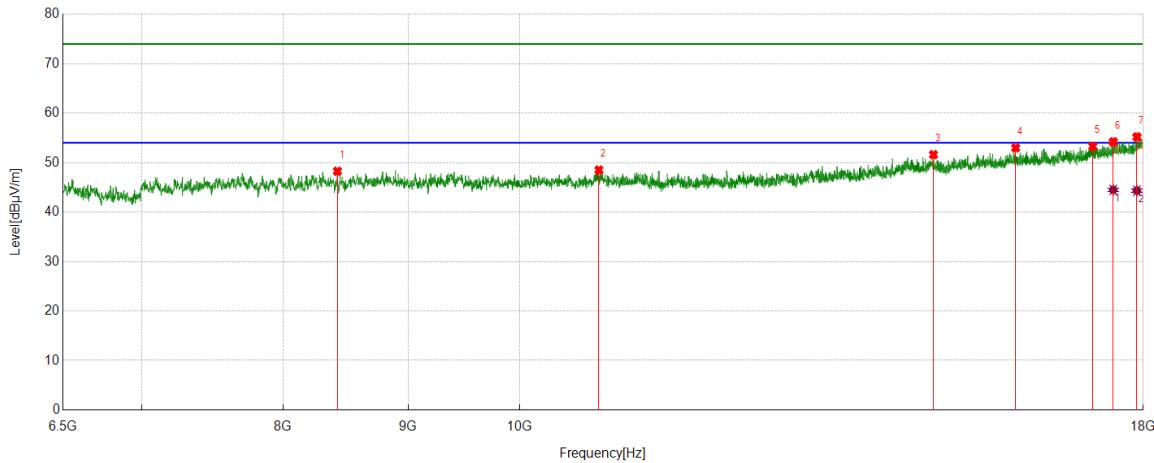
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7972.2454	43.51	5.39	48.90	74.00	-25.10	Vertical
2	9367.8113	42.67	6.49	49.16	74.00	-24.84	Vertical
3	11100.7668	47.87	7.35	55.22	74.00	-18.78	Vertical
4	14731.5386	39.49	12.81	52.30	74.00	-21.70	Vertical
5	16660.0267	39.91	15.61	55.52	74.00	-18.48	Vertical
6	17829.3882	35.54	19.11	54.65	74.00	-19.35	Vertical
7	17965.4942	35.72	19.63	55.35	74.00	-18.65	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11100.7668	36.86	7.35	44.21	54.00	-9.79	Vertical
2	16660.0267	27.00	15.61	42.61	54.00	-11.39	Vertical
3	17829.3882	24.92	19.11	44.03	54.00	-9.97	Vertical
4	17965.4942	25.32	19.63	44.95	54.00	-9.05	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8420.8201	42.38	5.88	48.26	74.00	-25.74	Horizontal
2	10774.8791	41.48	7.03	48.51	74.00	-25.49	Horizontal
3	14769.8783	38.68	12.93	51.61	74.00	-22.39	Horizontal
4	15960.3267	38.41	14.57	52.98	74.00	-21.02	Horizontal
5	17164.1940	36.81	16.47	53.28	74.00	-20.72	Horizontal
6	17497.7496	36.57	17.63	54.20	74.00	-19.80	Horizontal
7	17892.6488	35.92	19.28	55.20	74.00	-18.80	Horizontal

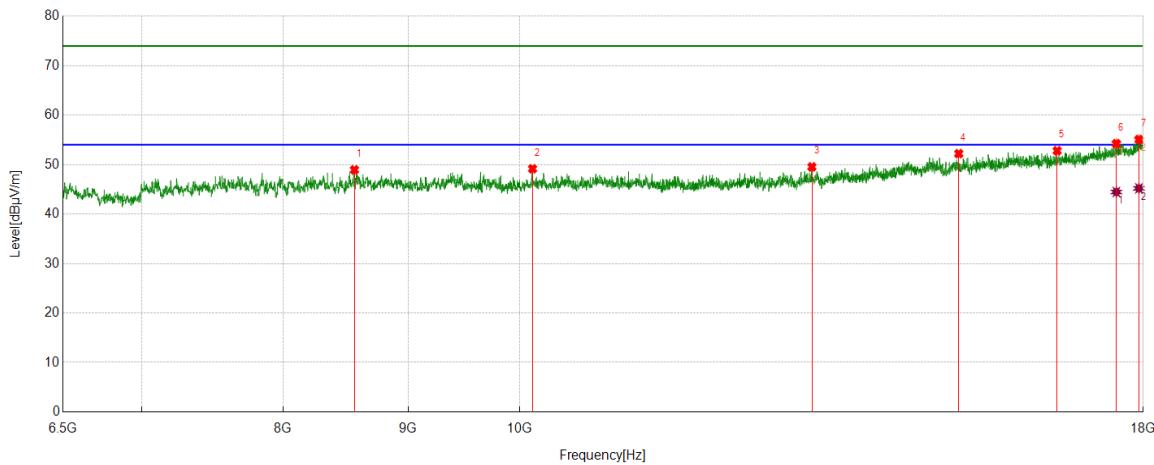
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17497.7496	26.86	17.63	44.49	54.00	-9.51	Horizontal
2	17892.6488	25.05	19.28	44.33	54.00	-9.67	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8556.9262	42.85	6.10	48.95	74.00	-25.05	Vertical
2	10121.1869	42.61	6.55	49.16	74.00	-24.84	Vertical
3	13171.1119	39.75	9.79	49.54	74.00	-24.46	Vertical
4	15126.4377	39.00	13.22	52.22	74.00	-21.78	Vertical
5	16596.7661	36.83	15.97	52.80	74.00	-21.20	Vertical
6	17549.5083	36.50	17.74	54.24	74.00	-19.76	Vertical
7	17927.1545	35.71	19.37	55.08	74.00	-18.92	Vertical

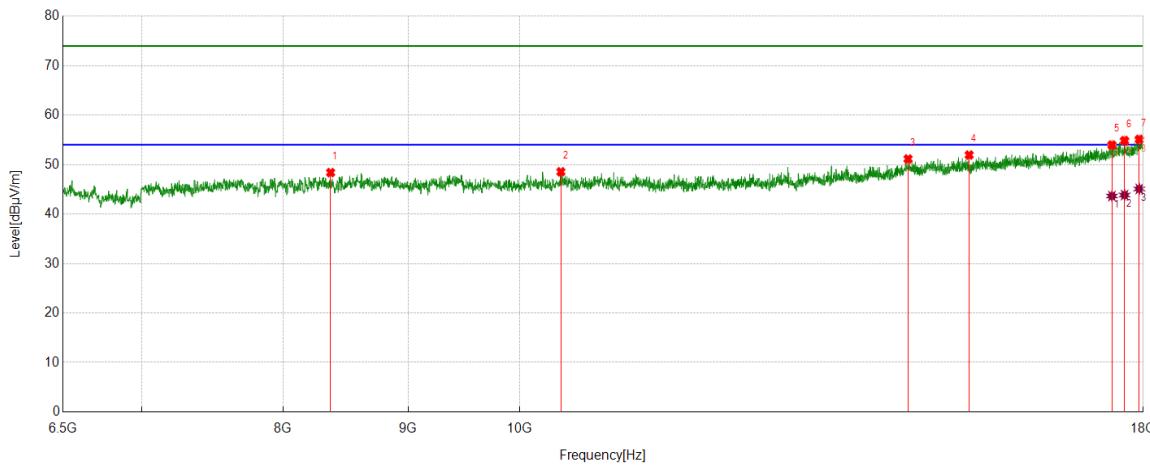
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17549.5083	26.73	17.74	44.47	54.00	-9.53	Vertical
2	17927.1545	25.83	19.37	45.20	54.00	-8.80	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8367.1445	42.61	5.78	48.39	74.00	-25.61	Horizontal
2	10395.3159	41.88	6.67	48.55	74.00	-25.45	Horizontal
3	14420.9868	38.24	12.91	51.15	74.00	-22.85	Horizontal
4	15275.9627	38.53	13.41	51.94	74.00	-22.06	Horizontal
5	17476.6628	36.31	17.65	53.96	74.00	-20.04	Horizontal
6	17685.6143	36.70	18.15	54.85	74.00	-19.15	Horizontal
7	17932.9055	35.72	19.39	55.11	74.00	-18.89	Horizontal

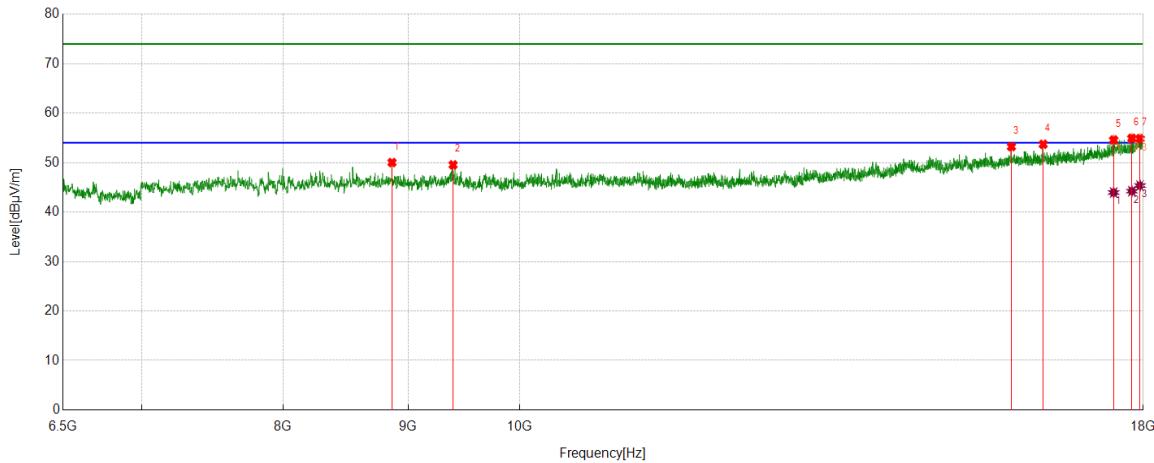
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17476.6628	26.00	17.65	43.65	54.00	-10.35	Horizontal
2	17685.6143	25.70	18.15	43.85	54.00	-10.15	Horizontal
3	17932.9055	25.69	19.39	45.08	54.00	-8.92	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8865.5609	43.76	6.26	50.02	74.00	-23.98	Vertical
2	9390.8151	43.00	6.55	49.55	74.00	-24.45	Vertical
3	15897.0662	38.63	14.60	53.23	74.00	-20.77	Vertical
4	16380.1467	38.62	15.09	53.71	74.00	-20.29	Vertical
5	17505.4176	36.96	17.62	54.58	74.00	-19.42	Vertical
6	17808.3014	36.00	18.92	54.92	74.00	-19.08	Vertical
7	17946.3244	35.36	19.48	54.84	74.00	-19.16	Vertical

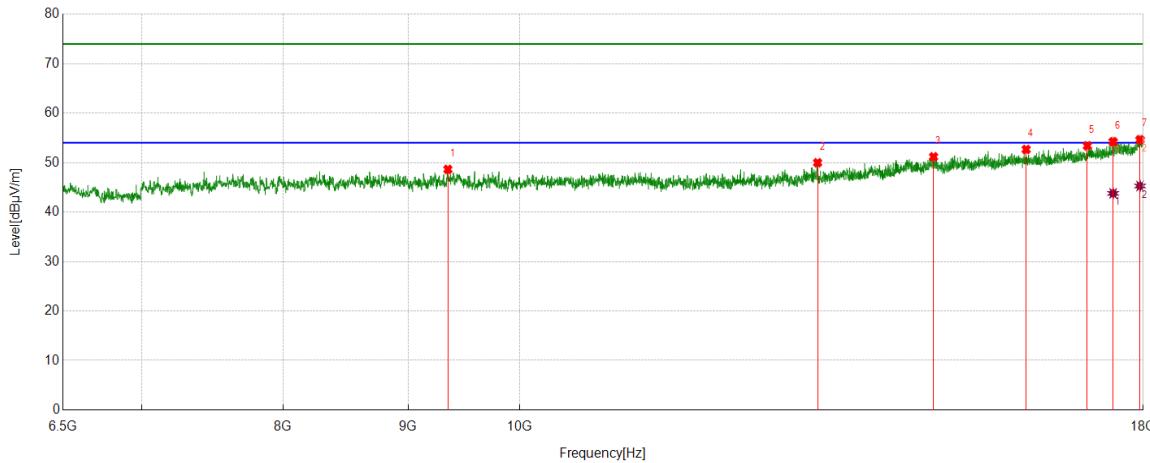
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17505.4176	26.33	17.62	43.95	54.00	-10.05	Vertical
2	17808.3014	25.31	18.92	44.23	54.00	-9.77	Vertical
3	17946.3244	25.88	19.48	45.36	54.00	-8.64	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9344.8075	42.23	6.40	48.63	74.00	-25.37	Horizontal
2	13242.0403	39.77	10.21	49.98	74.00	-24.02	Horizontal
3	14771.7953	38.27	12.91	51.18	74.00	-22.82	Horizontal
4	16119.4366	37.78	14.88	52.66	74.00	-21.34	Horizontal
5	17076.0127	37.05	16.35	53.40	74.00	-20.60	Horizontal
6	17495.8326	36.58	17.64	54.22	74.00	-19.78	Horizontal
7	17946.3244	35.16	19.48	54.64	74.00	-19.36	Horizontal

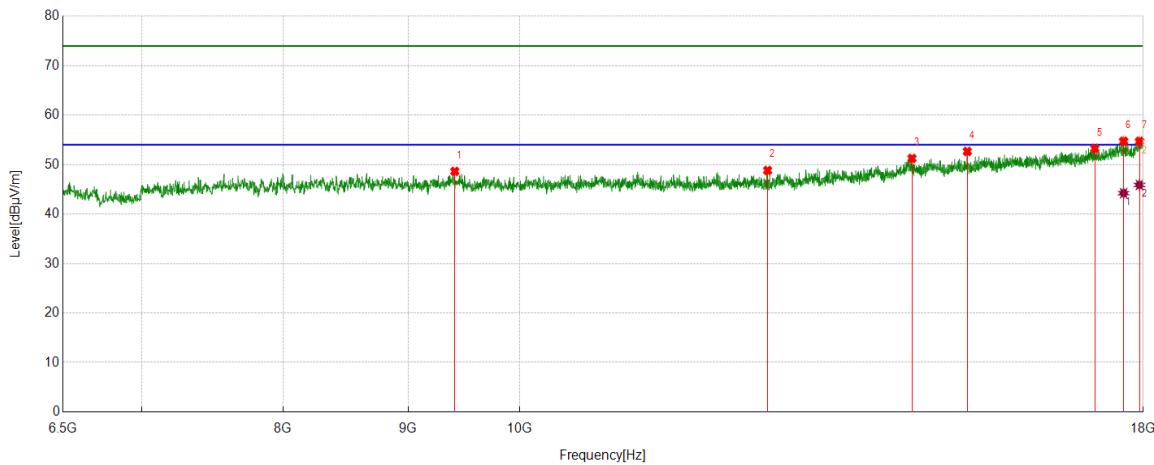
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17495.8326	26.14	17.64	43.78	54.00	-10.22	Horizontal
2	17946.3244	25.79	19.48	45.27	54.00	-8.73	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9406.1510	42.08	6.55	48.63	74.00	-25.37	Vertical
2	12632.4387	39.92	8.91	48.83	74.00	-25.17	Vertical
3	14474.6624	38.39	12.86	51.25	74.00	-22.75	Vertical
4	15249.1249	39.24	13.43	52.67	74.00	-21.33	Vertical
5	17196.7828	36.68	16.59	53.27	74.00	-20.73	Vertical
6	17670.2784	36.67	18.07	54.74	74.00	-19.26	Vertical
7	17936.7395	35.29	19.42	54.71	74.00	-19.29	Vertical

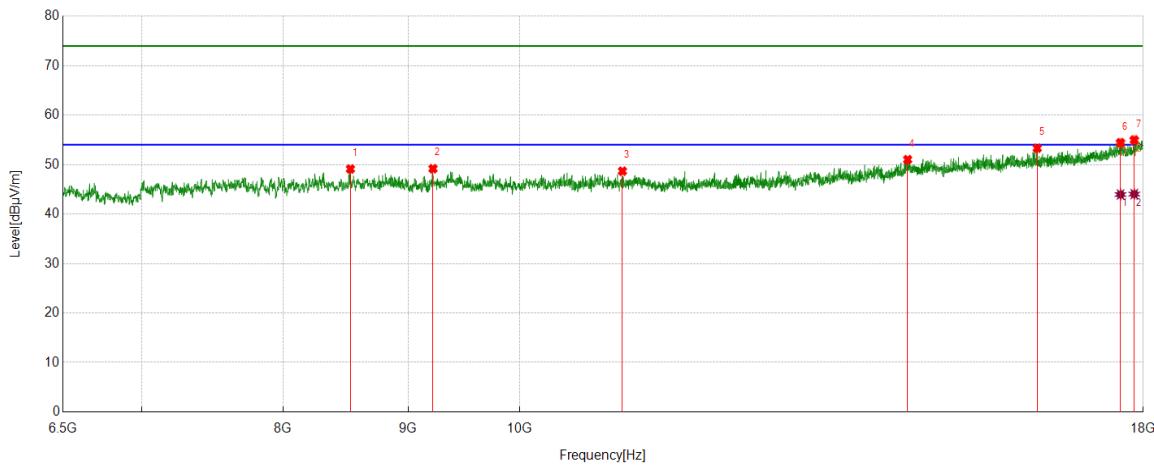
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17670.2784	26.16	18.07	44.23	54.00	-9.77	Vertical
2	17936.7395	26.47	19.42	45.89	54.00	-8.11	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8524.3374	42.80	6.32	49.12	74.00	-24.88	Horizontal
2	9214.4524	43.17	6.01	49.18	74.00	-24.82	Horizontal
3	11016.4194	41.46	7.22	48.68	74.00	-25.32	Horizontal
4	14415.2359	38.11	12.91	51.02	74.00	-22.98	Horizontal
5	16288.1314	38.34	14.98	53.32	74.00	-20.68	Horizontal
6	17618.5198	36.37	18.07	54.44	74.00	-19.56	Horizontal
7	17848.5581	35.84	19.14	54.98	74.00	-19.02	Horizontal

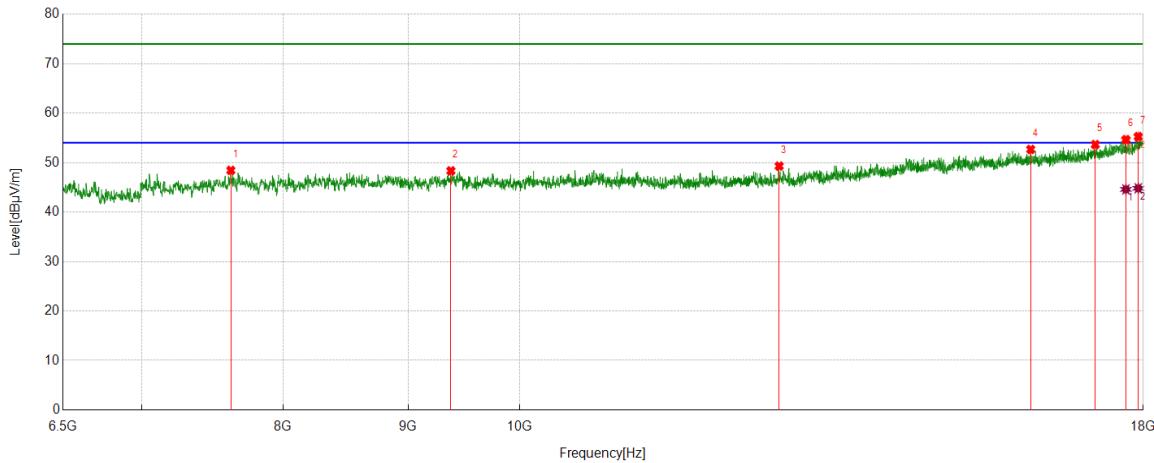
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17618.5198	25.89	18.07	43.96	54.00	-10.04	Horizontal
2	17848.5581	24.90	19.14	44.04	54.00	-9.96	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7615.6859	43.37	5.06	48.43	74.00	-25.57	Vertical
2	9371.6453	41.85	6.49	48.34	74.00	-25.66	Vertical
3	12770.4617	40.36	8.94	49.30	74.00	-24.70	Vertical
4	16188.4481	37.41	15.26	52.67	74.00	-21.33	Vertical
5	17204.4507	36.98	16.67	53.65	74.00	-20.35	Vertical
6	17708.6181	36.29	18.35	54.64	74.00	-19.36	Vertical
7	17915.6526	35.94	19.32	55.26	74.00	-18.74	Vertical

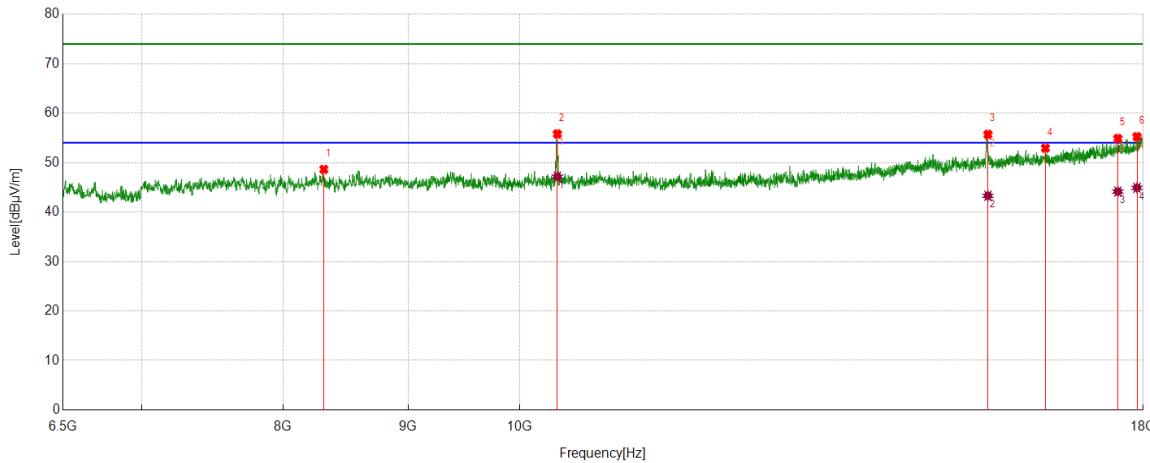
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17708.6181	26.24	18.35	44.59	54.00	-9.41	Vertical
2	17915.6526	25.49	19.32	44.81	54.00	-9.19	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8313.4689	42.44	6.19	48.63	74.00	-25.37	Horizontal
2	10360.8101	49.10	6.70	55.80	74.00	-18.20	Horizontal
3	15548.1747	41.95	13.76	55.71	74.00	-18.29	Horizontal
4	16414.6524	37.81	15.11	52.92	74.00	-21.08	Horizontal
5	17574.4291	36.96	17.92	54.88	74.00	-19.12	Horizontal
6	17894.5658	35.99	19.25	55.24	74.00	-18.76	Horizontal

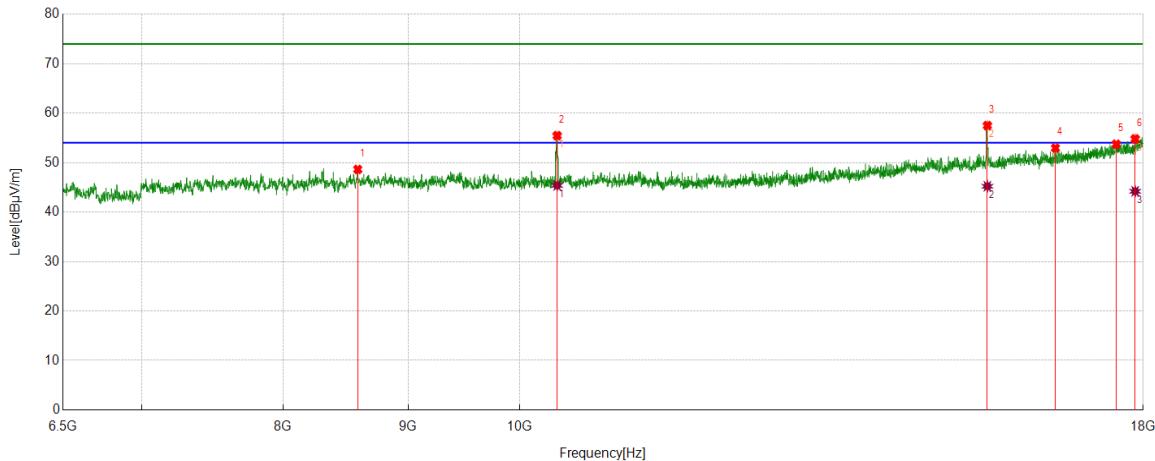
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10360.8101	40.45	6.70	47.15	54.00	-6.85	Horizontal
2	15548.1747	29.53	13.76	43.29	54.00	-10.71	Horizontal
3	17574.4291	26.23	17.92	44.15	54.00	-9.85	Horizontal
4	17894.5658	25.66	19.25	44.91	54.00	-9.09	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Vertical	PASS



PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8583.7640	42.39	6.24	48.63	74.00	-25.37	Vertical
2	10358.8931	48.76	6.70	55.46	74.00	-18.54	Vertical
3	15540.5068	43.68	13.82	57.50	74.00	-16.50	Vertical
4	16569.9283	37.03	15.91	52.94	74.00	-21.06	Vertical
5	17547.5913	36.00	17.73	53.73	74.00	-20.27	Vertical
6	17863.8940	35.57	19.24	54.81	74.00	-19.19	Vertical

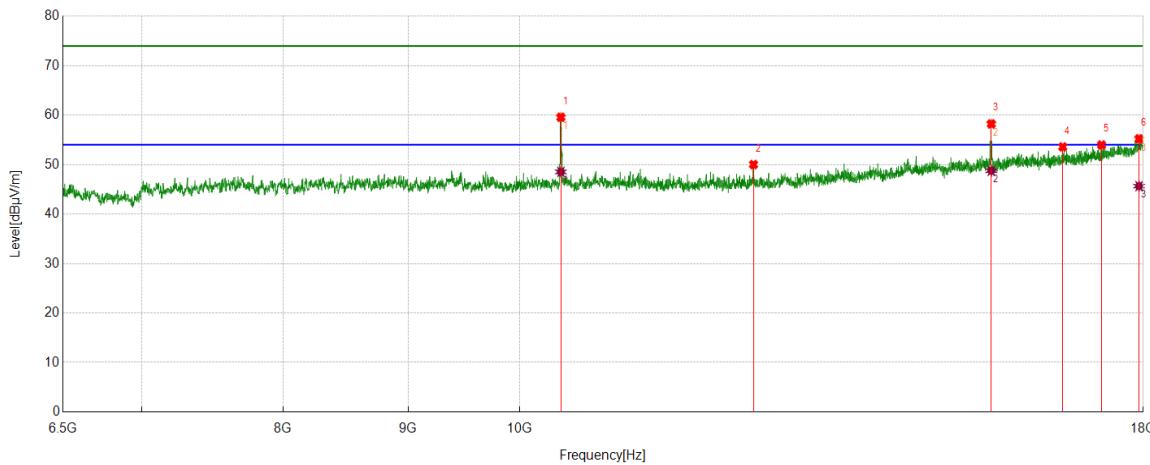
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10358.8931	38.69	6.70	45.39	54.00	-8.61	Vertical
2	15540.5068	31.40	13.82	45.22	54.00	-8.78	Vertical
3	17863.8940	24.96	19.24	44.20	54.00	-9.80	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10395.3159	52.91	6.67	59.58	74.00	-14.42	Horizontal
2	12465.6609	41.49	8.53	50.02	74.00	-23.98	Horizontal
3	15598.0163	44.57	13.67	58.24	74.00	-15.76	Horizontal
4	16684.9475	37.91	15.68	53.59	74.00	-20.41	Horizontal
5	17306.0510	36.97	17.01	53.98	74.00	-20.02	Horizontal
6	17929.0715	35.85	19.37	55.22	74.00	-18.78	Horizontal

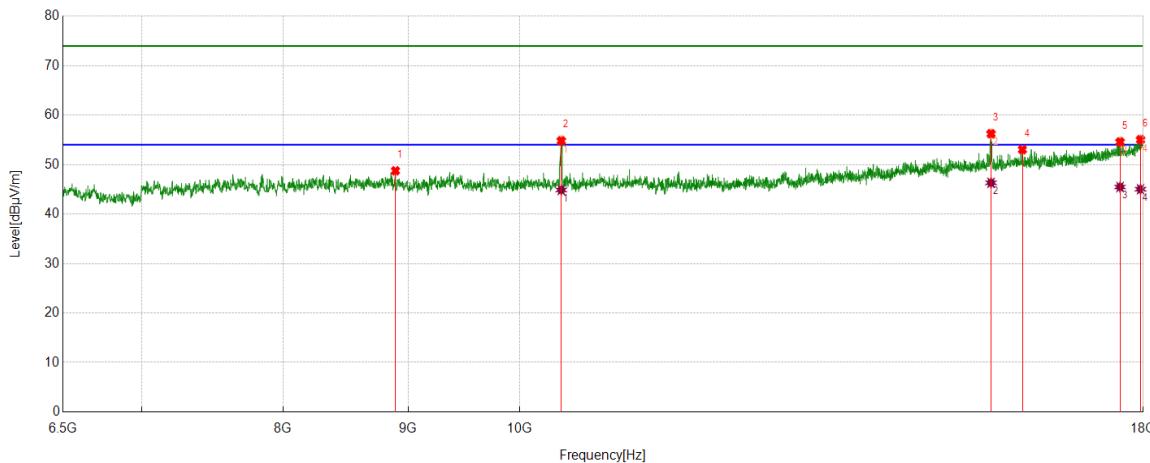
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10395.3159	41.86	6.67	48.53	54.00	-5.47	Horizontal
2	15598.0163	35.09	13.67	48.76	54.00	-5.24	Horizontal
3	17929.0715	26.28	19.37	45.65	54.00	-8.35	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8894.3157	42.52	6.23	48.75	74.00	-25.25	Vertical
2	10399.1499	48.10	6.72	54.82	74.00	-19.18	Vertical
3	15594.1824	42.60	13.65	56.25	74.00	-17.75	Vertical
4	16061.9270	38.48	14.55	53.03	74.00	-20.97	Vertical
5	17610.8518	36.53	18.06	54.59	74.00	-19.41	Vertical
6	17953.9923	35.51	19.54	55.05	74.00	-18.95	Vertical

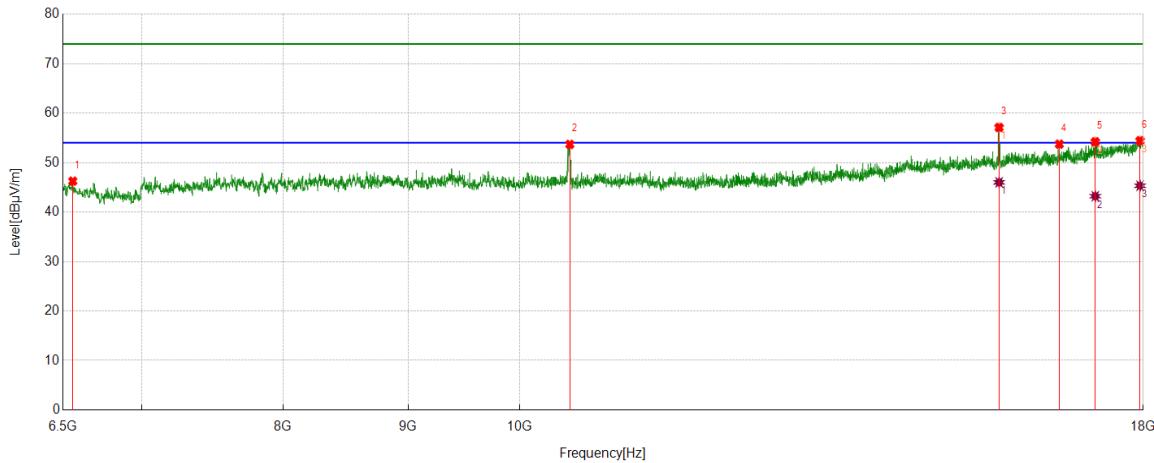
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10399.1499	38.16	6.72	44.88	54.00	-9.12	Vertical
2	15594.1824	32.67	13.65	46.32	54.00	-7.68	Vertical
3	17610.8518	27.41	18.06	45.47	54.00	-8.53	Vertical
4	17953.9923	25.49	19.54	45.03	54.00	-8.97	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6561.3436	42.89	3.36	46.25	74.00	-27.75	Horizontal
2	10483.4972	46.85	6.84	53.69	74.00	-20.31	Horizontal
3	15713.0355	43.05	14.06	57.11	74.00	-16.89	Horizontal
4	16631.2719	37.92	15.81	53.73	74.00	-20.27	Horizontal
5	17204.4507	37.54	16.67	54.21	74.00	-19.79	Horizontal
6	17946.3244	34.95	19.48	54.43	74.00	-19.57	Horizontal

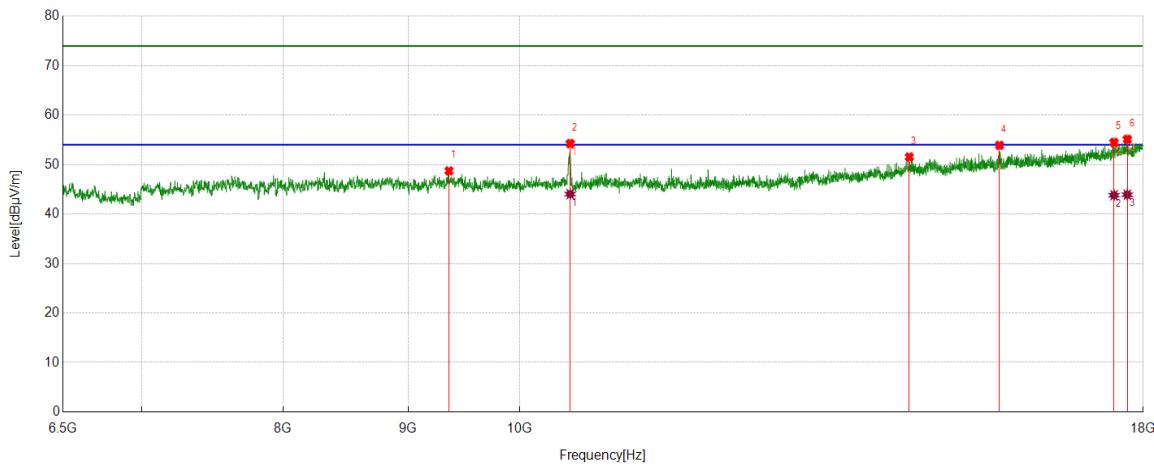
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15713.0355	31.95	14.06	46.01	54.00	-7.99	Horizontal
2	17204.4507	26.54	16.67	43.21	54.00	-10.79	Horizontal
3	17946.3244	25.85	19.48	45.33	54.00	-8.67	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9354.3924	42.28	6.45	48.73	74.00	-25.27	Vertical
2	10487.3312	47.35	6.90	54.25	74.00	-19.75	Vertical
3	14438.2397	38.68	12.87	51.55	74.00	-22.45	Vertical
4	15718.7865	39.86	14.04	53.90	74.00	-20.10	Vertical
5	17511.1685	36.87	17.62	54.49	74.00	-19.51	Vertical
6	17731.6219	36.59	18.53	55.12	74.00	-18.88	Vertical

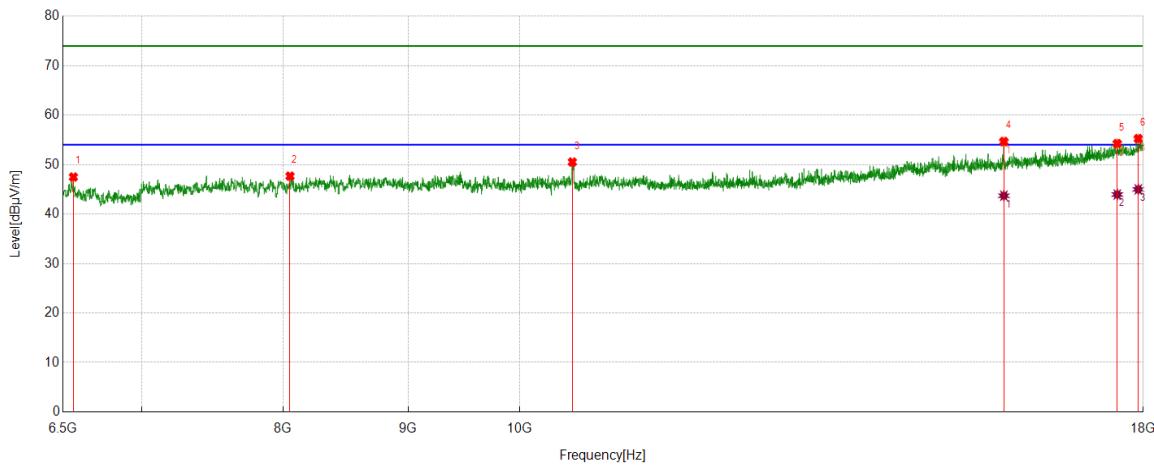
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10487.3312	37.14	6.90	44.04	54.00	-9.96	Vertical
2	17511.1685	26.19	17.62	43.81	54.00	-10.19	Vertical
3	17731.6219	25.39	18.53	43.92	54.00	-10.08	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6565.1775	44.11	3.38	47.49	74.00	-26.51	Horizontal
2	8052.7588	42.09	5.58	47.67	74.00	-26.33	Horizontal
3	10508.4181	43.66	6.86	50.52	74.00	-23.48	Horizontal
4	15783.9640	40.43	14.24	54.67	74.00	-19.33	Horizontal
5	17564.8441	36.42	17.83	54.25	74.00	-19.75	Horizontal
6	17915.6526	35.94	19.32	55.26	74.00	-18.74	Horizontal

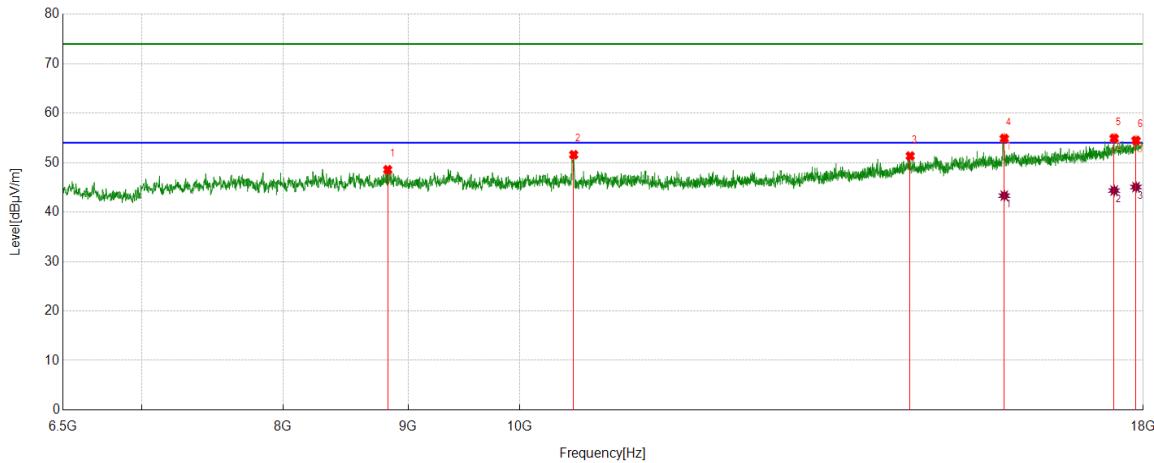
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15783.9640	29.47	14.24	43.71	54.00	-10.29	Horizontal
2	17564.8441	26.13	17.83	43.96	54.00	-10.04	Horizontal
3	17915.6526	25.67	19.32	44.99	54.00	-9.01	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8829.1382	42.30	6.26	48.56	74.00	-25.44	Vertical
2	10521.8370	44.70	6.90	51.60	74.00	-22.40	Vertical
3	14449.7416	38.41	12.93	51.34	74.00	-22.66	Vertical
4	15789.7150	40.54	14.35	54.89	74.00	-19.11	Vertical
5	17513.0855	37.30	17.62	54.92	74.00	-19.08	Vertical
6	17877.3129	35.30	19.18	54.48	74.00	-19.52	Vertical

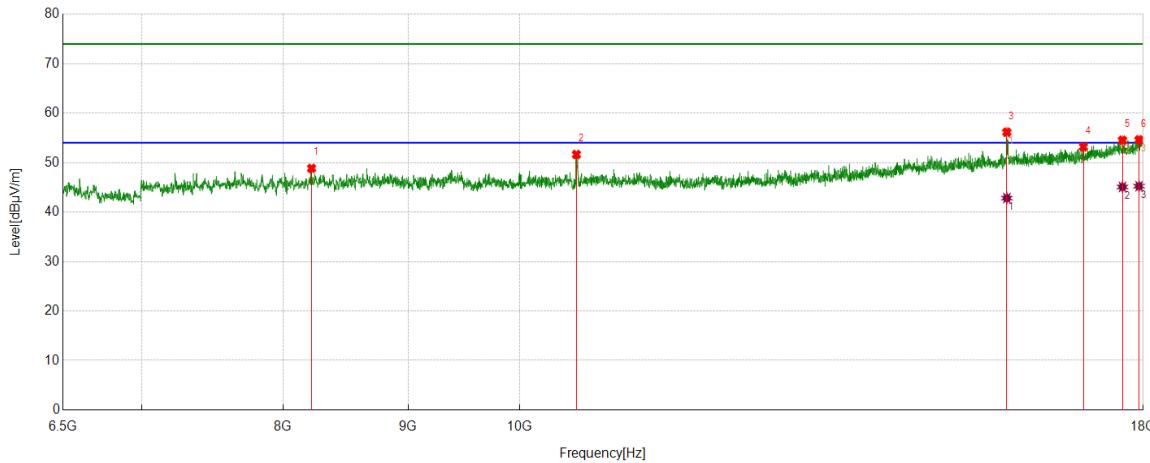
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15789.7150	28.97	14.35	43.32	54.00	-10.68	Vertical
2	17513.0855	26.73	17.62	44.35	54.00	-9.65	Vertical
3	17877.3129	25.88	19.18	45.06	54.00	-8.94	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8217.6196	42.76	6.08	48.84	74.00	-25.16	Horizontal
2	10548.6748	44.72	6.93	51.65	74.00	-22.35	Horizontal
3	15828.0547	41.68	14.48	56.16	74.00	-17.84	Horizontal
4	17012.7521	37.00	16.18	53.18	74.00	-20.82	Horizontal
5	17651.1085	36.49	18.03	54.52	74.00	-19.48	Horizontal
6	17929.0715	35.24	19.37	54.61	74.00	-19.39	Horizontal

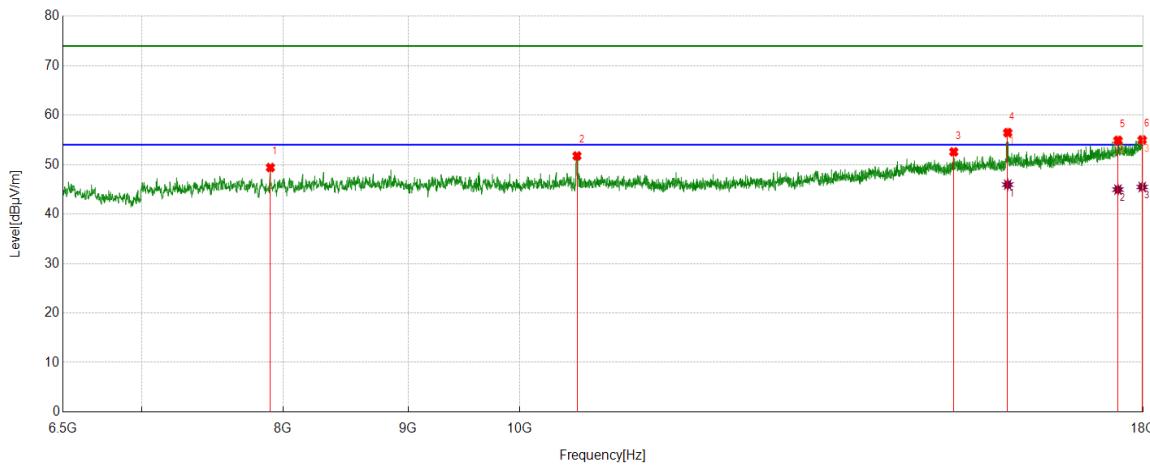
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15828.0547	28.34	14.48	42.82	54.00	-11.18	Horizontal
2	17651.1085	27.05	18.03	45.08	54.00	-8.92	Horizontal
3	17929.0715	25.86	19.37	45.23	54.00	-8.77	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7905.1509	43.83	5.58	49.41	74.00	-24.59	Vertical
2	10554.4257	44.89	6.87	51.76	74.00	-22.24	Vertical
3	15055.5093	39.54	13.04	52.58	74.00	-21.42	Vertical
4	15841.4736	41.89	14.57	56.46	74.00	-17.54	Vertical
5	17576.3461	36.97	17.93	54.90	74.00	-19.10	Vertical
6	17982.7471	35.18	19.81	54.99	74.00	-19.01	Vertical

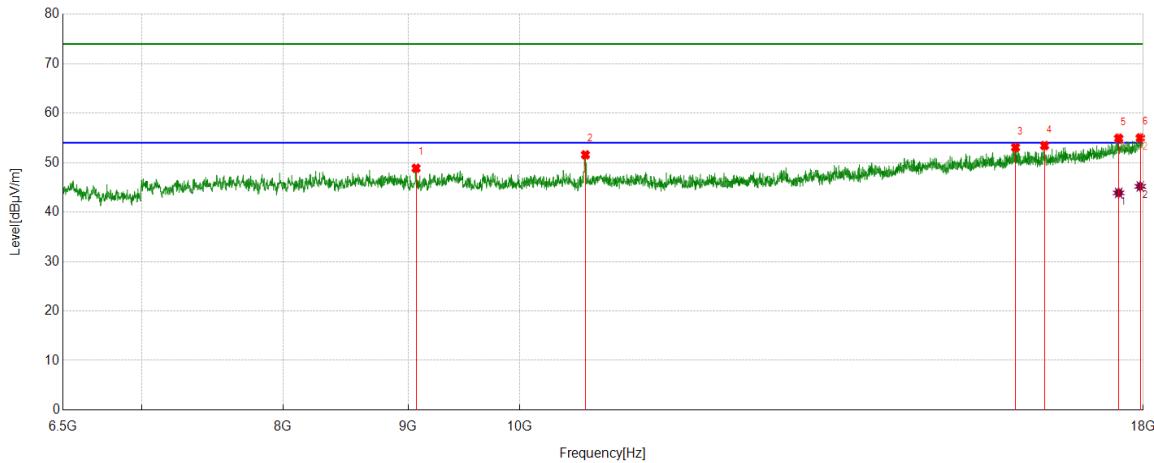
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15841.4736	31.38	14.57	45.95	54.00	-8.05	Vertical
2	17576.3461	27.02	17.93	44.95	54.00	-9.05	Vertical
3	17982.7471	25.66	19.81	45.47	54.00	-8.53	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9068.7615	42.75	6.11	48.86	74.00	-25.14	Horizontal
2	10638.7731	44.71	6.87	51.58	74.00	-22.42	Horizontal
3	15958.4097	38.53	14.55	53.08	74.00	-20.92	Horizontal
4	16401.2335	38.41	15.03	53.44	74.00	-20.56	Horizontal
5	17587.8480	36.90	18.02	54.92	74.00	-19.08	Horizontal
6	17950.1584	35.50	19.49	54.99	74.00	-19.01	Horizontal

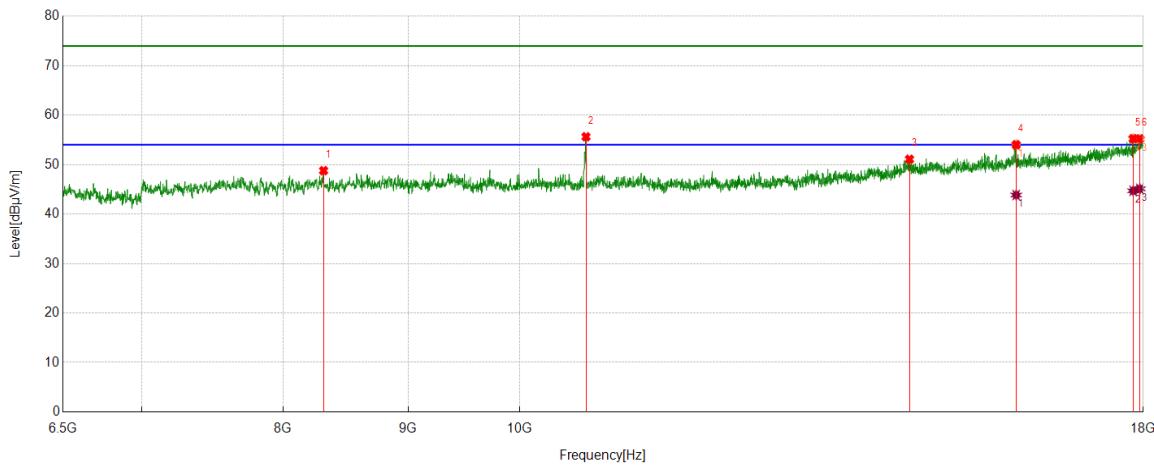
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17587.8480	25.86	18.02	43.88	54.00	-10.12	Horizontal
2	17950.1584	25.70	19.49	45.19	54.00	-8.81	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8311.5519	42.51	6.27	48.78	74.00	-25.22	Vertical
2	10644.5241	48.76	6.87	55.63	74.00	-18.37	Vertical
3	14440.1567	38.21	12.87	51.08	74.00	-22.92	Vertical
4	15967.9947	39.54	14.48	54.02	74.00	-19.98	Vertical
5	17829.3882	36.13	19.11	55.24	74.00	-18.76	Vertical
6	17942.4904	35.75	19.46	55.21	74.00	-18.79	Vertical

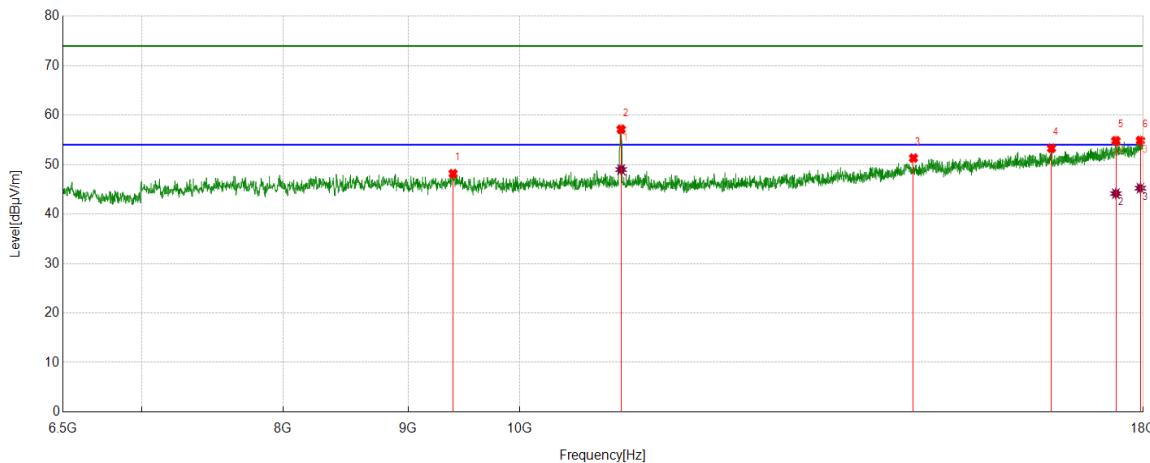
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15967.9947	29.37	14.48	43.85	54.00	-10.15	Vertical
2	17829.3882	25.60	19.11	44.71	54.00	-9.29	Vertical
3	17942.4904	25.64	19.46	45.10	54.00	-8.90	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9390.8151	41.63	6.55	48.18	74.00	-25.82	Horizontal
2	11003.0005	49.86	7.28	57.14	74.00	-16.86	Horizontal
3	14493.8323	38.50	12.82	51.32	74.00	-22.68	Horizontal
4	16508.5848	37.37	15.93	53.30	74.00	-20.70	Horizontal
5	17541.8403	37.12	17.71	54.83	74.00	-19.17	Horizontal
6	17952.0753	35.35	19.52	54.87	74.00	-19.13	Horizontal

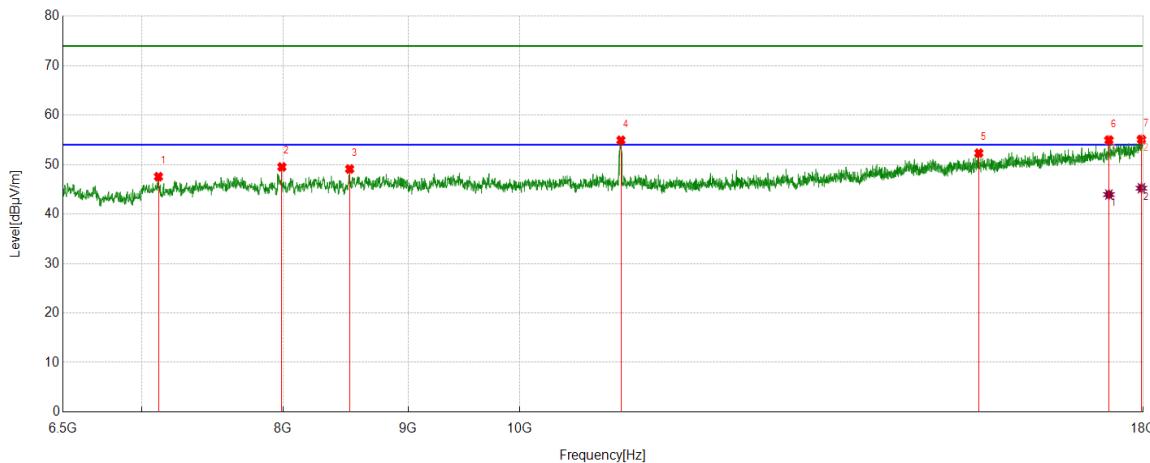
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11003.0005	41.72	7.28	49.00	54.00	-5.00	Horizontal
2	17541.8403	26.43	17.71	44.14	54.00	-9.86	Horizontal
3	17952.0753	25.72	19.52	45.24	54.00	-8.76	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7113.4356	43.64	3.92	47.56	74.00	-26.44	Vertical
2	7991.4152	43.97	5.56	49.53	74.00	-24.47	Vertical
3	8518.5864	42.67	6.44	49.11	74.00	-24.89	Vertical
4	11001.0835	47.65	7.29	54.94	74.00	-19.06	Vertical
5	15415.9026	38.62	13.71	52.33	74.00	-21.67	Vertical
6	17426.8211	37.46	17.51	54.97	74.00	-19.03	Vertical
7	17969.3282	35.47	19.63	55.10	74.00	-18.90	Vertical

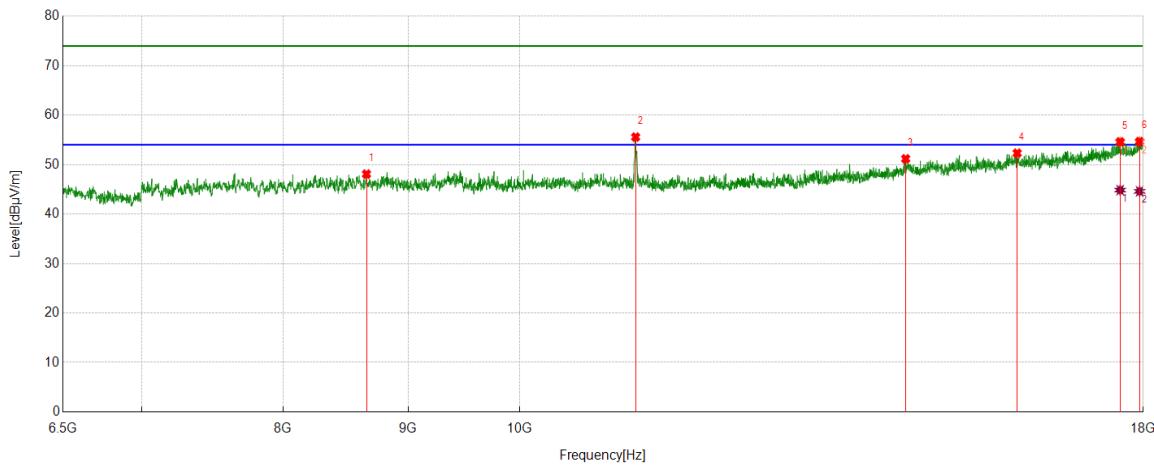
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17426.8211	26.44	17.51	43.95	54.00	-10.05	Vertical
2	17969.3282	25.60	19.63	45.23	54.00	-8.77	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8654.6924	41.82	6.27	48.09	74.00	-25.91	Horizontal
2	11154.4424	48.26	7.31	55.57	74.00	-18.43	Horizontal
3	14388.3981	38.40	12.78	51.18	74.00	-22.82	Horizontal
4	15983.3306	37.77	14.55	52.32	74.00	-21.68	Horizontal
5	17612.7688	36.54	18.06	54.60	74.00	-19.40	Horizontal
6	17938.6564	35.22	19.44	54.66	74.00	-19.34	Horizontal

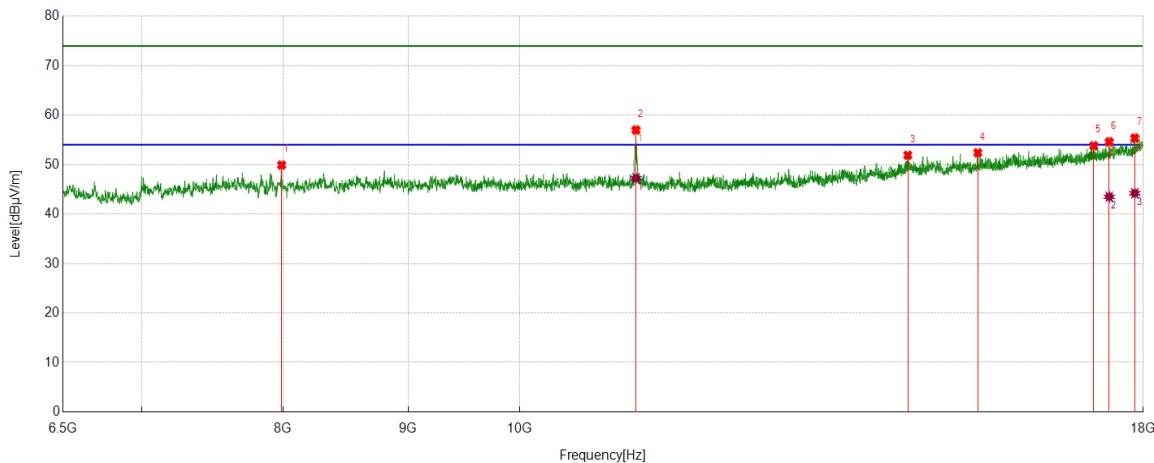
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17612.7688	26.79	18.06	44.85	54.00	-9.15	Horizontal
2	17938.6564	25.16	19.44	44.60	54.00	-9.40	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7989.4982	44.31	5.60	49.91	74.00	-24.09	Vertical
2	11158.2764	49.76	7.24	57.00	74.00	-17.00	Vertical
3	14417.1529	38.98	12.91	51.89	74.00	-22.11	Vertical
4	15400.5668	38.73	13.67	52.40	74.00	-21.60	Vertical
5	17179.5299	37.24	16.58	53.82	74.00	-20.18	Vertical
6	17432.5721	37.05	17.56	54.61	74.00	-19.39	Vertical
7	17858.1430	36.12	19.24	55.36	74.00	-18.64	Vertical

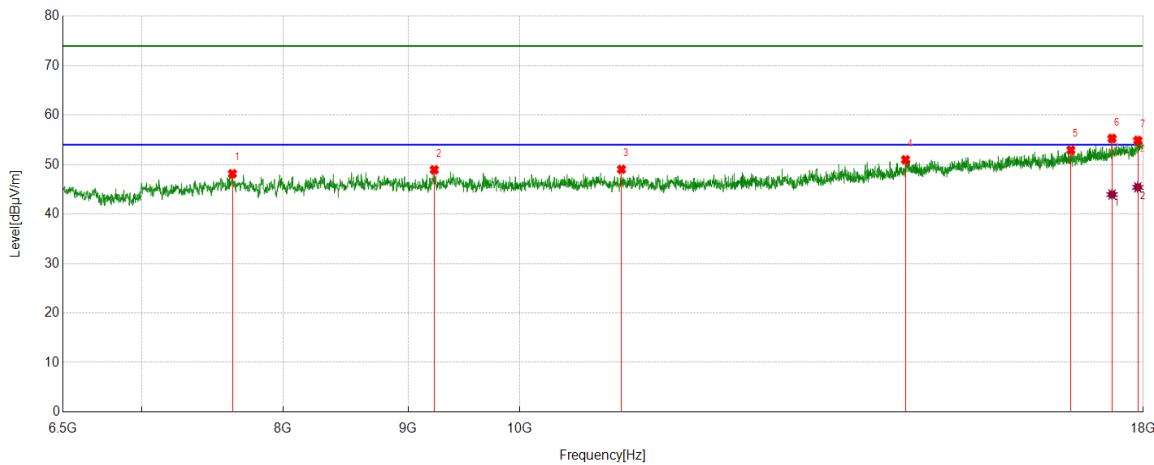
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11158.2764	40.00	7.24	47.24	54.00	-6.76	Vertical
2	17432.5721	25.94	17.56	43.50	54.00	-10.50	Vertical
3	17858.1430	24.97	19.24	44.21	54.00	-9.79	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7627.1879	42.98	5.18	48.16	74.00	-25.84	Horizontal
2	9225.9543	42.94	6.01	48.95	74.00	-25.05	Horizontal
3	11006.8345	41.77	7.28	49.05	74.00	-24.95	Horizontal
4	14386.4811	38.22	12.76	50.98	74.00	-23.02	Horizontal
5	16813.3856	36.68	16.26	52.94	74.00	-21.06	Horizontal
6	17478.5798	37.64	17.65	55.29	74.00	-18.71	Horizontal
7	17907.9847	35.66	19.23	54.89	74.00	-19.11	Horizontal

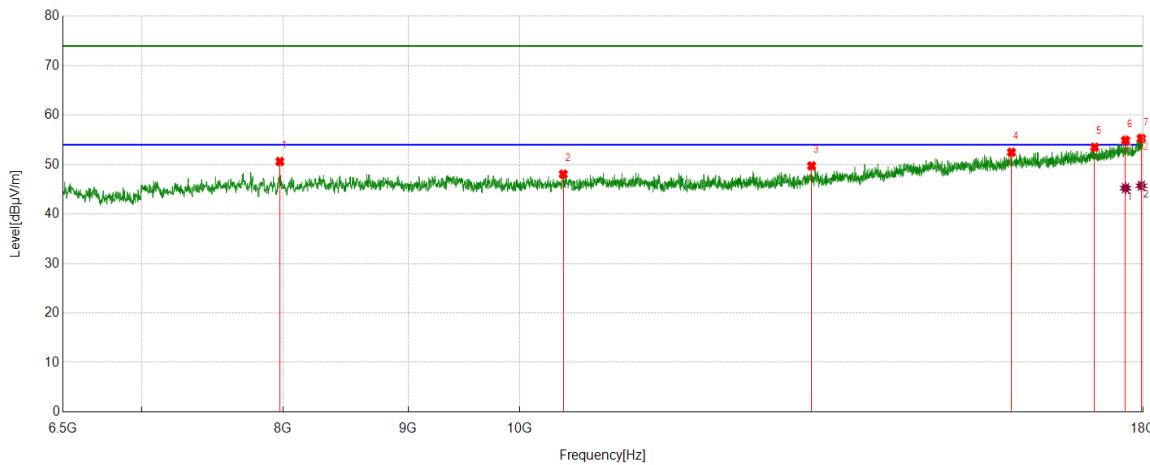
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17478.5798	26.31	17.65	43.96	54.00	-10.04	Horizontal
2	17907.9847	26.18	19.23	45.41	54.00	-8.59	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7976.0793	45.25	5.38	50.63	74.00	-23.37	Vertical
2	10418.3197	41.43	6.64	48.07	74.00	-25.93	Vertical
3	13167.2779	39.96	9.78	49.74	74.00	-24.26	Vertical
4	15897.0662	37.89	14.60	52.49	74.00	-21.51	Vertical
5	17194.8658	36.91	16.60	53.51	74.00	-20.49	Vertical
6	17702.8671	36.61	18.30	54.91	74.00	-19.09	Vertical
7	17967.4112	35.68	19.63	55.31	74.00	-18.69	Vertical

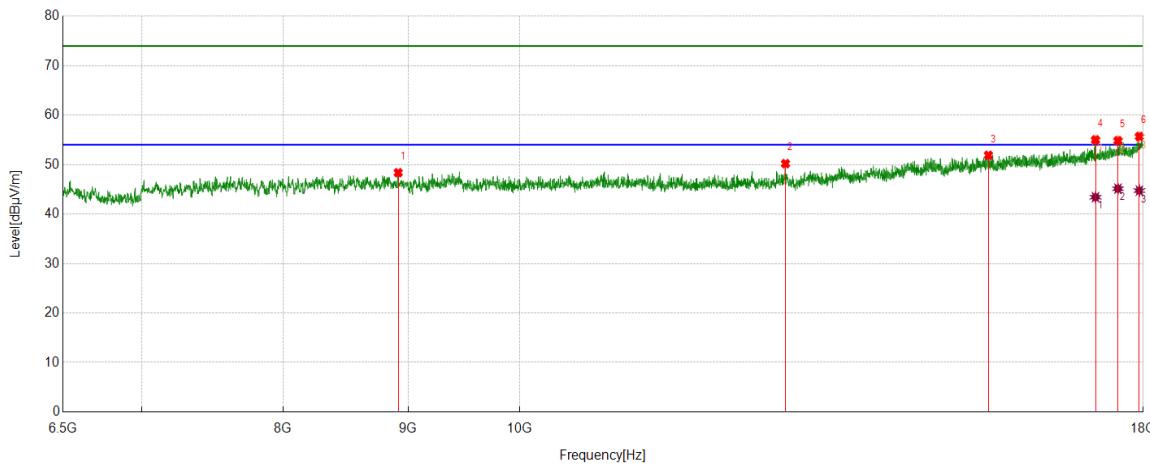
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17702.8671	26.94	18.30	45.24	54.00	-8.76	Vertical
2	17967.4112	26.09	19.63	45.72	54.00	-8.28	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8917.3196	42.18	6.19	48.37	74.00	-25.63	Horizontal
2	12847.1412	40.90	9.30	50.20	74.00	-23.80	Horizontal
3	15555.8426	38.18	13.71	51.89	74.00	-22.11	Horizontal
4	17208.2847	38.26	16.74	55.00	74.00	-19.00	Horizontal
5	17576.3461	36.90	17.93	54.83	74.00	-19.17	Horizontal
6	17934.8225	36.29	19.40	55.69	74.00	-18.31	Horizontal

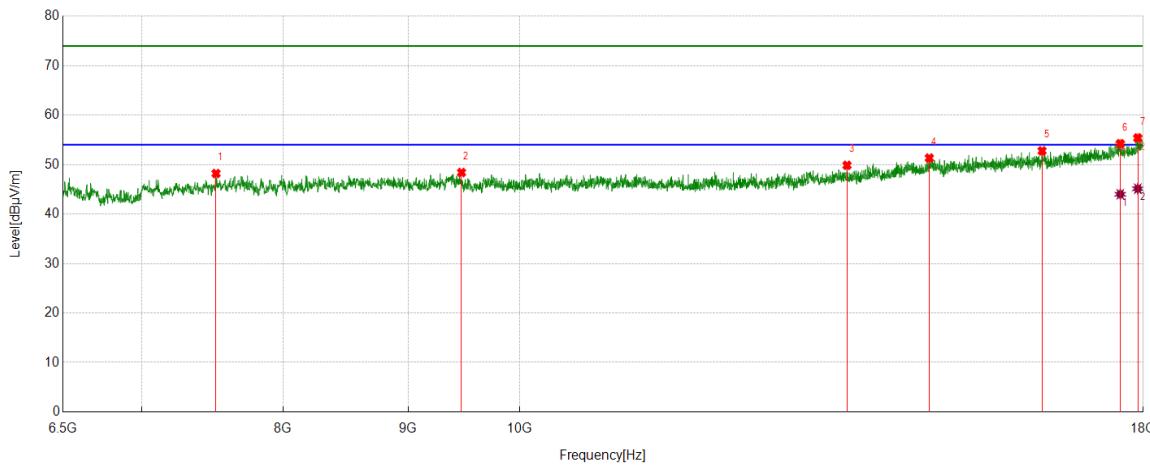
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17208.2847	26.67	16.74	43.41	54.00	-10.59	Horizontal
2	17576.3461	27.20	17.93	45.13	54.00	-8.87	Horizontal
3	17934.8225	25.35	19.40	44.75	54.00	-9.25	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7510.2517	43.78	4.42	48.20	74.00	-25.80	Vertical
2	9465.5776	41.90	6.50	48.40	74.00	-25.60	Vertical
3	13613.9357	39.14	10.72	49.86	74.00	-24.14	Vertical
4	14712.3687	38.55	12.78	51.33	74.00	-22.67	Vertical
5	16362.8938	37.76	15.02	52.78	74.00	-21.22	Vertical
6	17614.6858	36.16	18.06	54.22	74.00	-19.78	Vertical
7	17907.9847	36.17	19.23	55.40	74.00	-18.60	Vertical

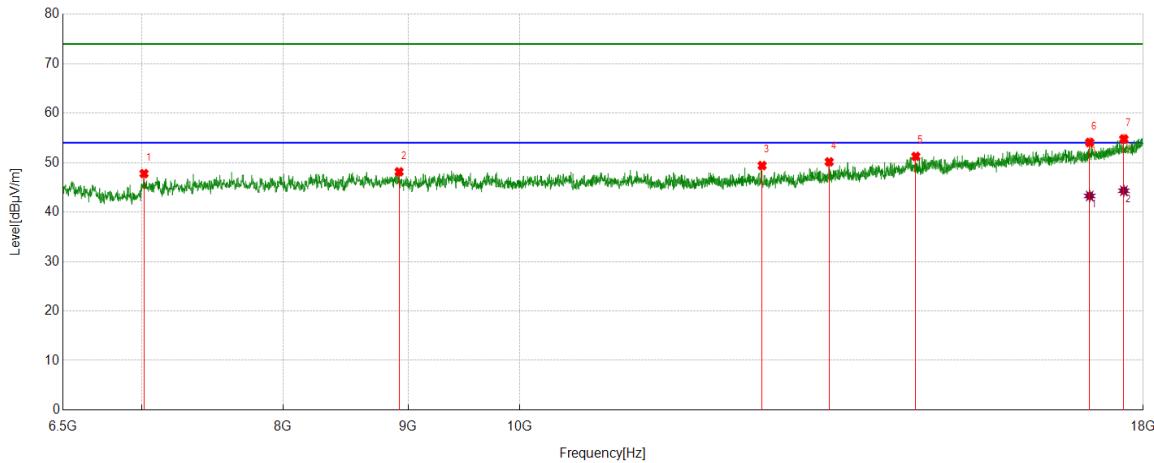
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17614.6858	25.95	18.06	44.01	54.00	-9.99	Vertical
2	17907.9847	25.89	19.23	45.12	54.00	-8.88	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7017.5863	44.06	3.72	47.78	74.00	-26.22	Horizontal
2	8924.9875	41.97	6.17	48.14	74.00	-25.86	Horizontal
3	12567.2612	40.67	8.73	49.40	74.00	-24.60	Horizontal
4	13387.7313	40.02	10.13	50.15	74.00	-23.85	Horizontal
5	14526.4211	38.54	12.71	51.25	74.00	-22.75	Horizontal
6	17114.3524	37.69	16.38	54.07	74.00	-19.93	Horizontal
7	17674.1124	36.71	18.08	54.79	74.00	-19.21	Horizontal

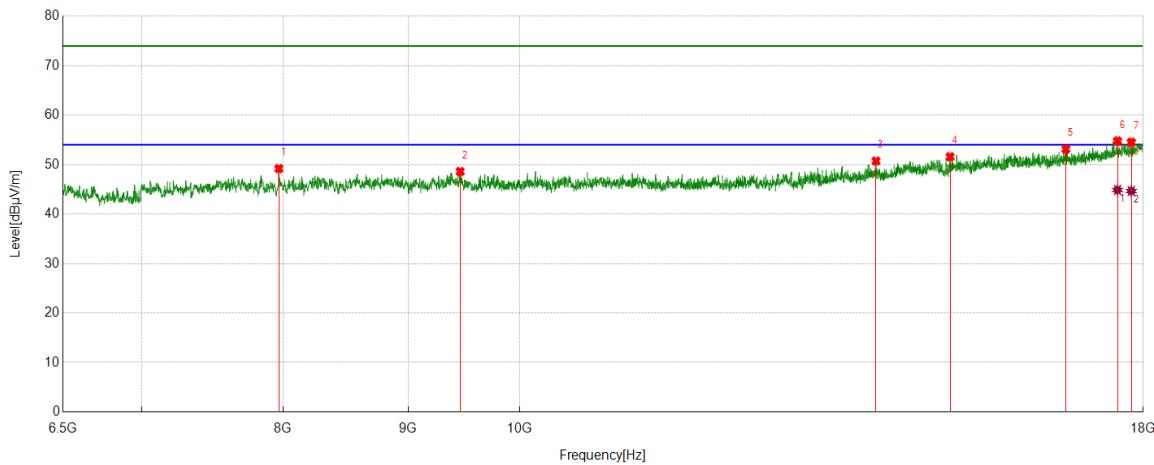
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17114.3524	26.88	16.38	43.26	54.00	-10.74	Horizontal
2	17674.1124	26.23	18.08	44.31	54.00	-9.69	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7968.4114	43.72	5.48	49.20	74.00	-24.80	Vertical
2	9454.0757	42.02	6.58	48.60	74.00	-25.40	Vertical
3	13991.5819	39.09	11.64	50.73	74.00	-23.27	Vertical
4	15003.7506	38.64	12.95	51.59	74.00	-22.41	Vertical
5	16734.7891	37.10	16.04	53.14	74.00	-20.86	Vertical
6	17568.6781	36.89	17.89	54.78	74.00	-19.22	Vertical
7	17798.7165	35.70	18.82	54.52	74.00	-19.48	Vertical

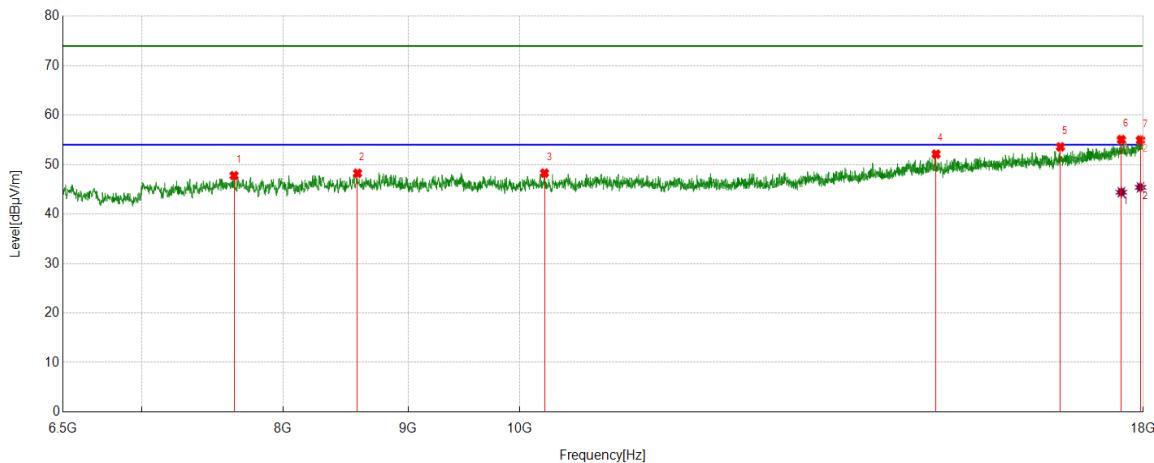
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17568.6781	26.98	17.89	44.87	54.00	-9.13	Vertical
2	17798.7165	25.84	18.82	44.66	54.00	-9.34	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7638.6898	42.61	5.17	47.78	74.00	-26.22	Horizontal
2	8581.8470	41.91	6.35	48.26	74.00	-25.74	Horizontal
3	10236.2060	41.57	6.71	48.28	74.00	-25.72	Horizontal
4	14806.3010	39.28	12.84	52.12	74.00	-21.88	Horizontal
5	16648.5248	37.86	15.73	53.59	74.00	-20.41	Horizontal
6	17631.9387	37.02	18.04	55.06	74.00	-18.94	Horizontal
7	17953.9923	35.43	19.54	54.97	74.00	-19.03	Horizontal

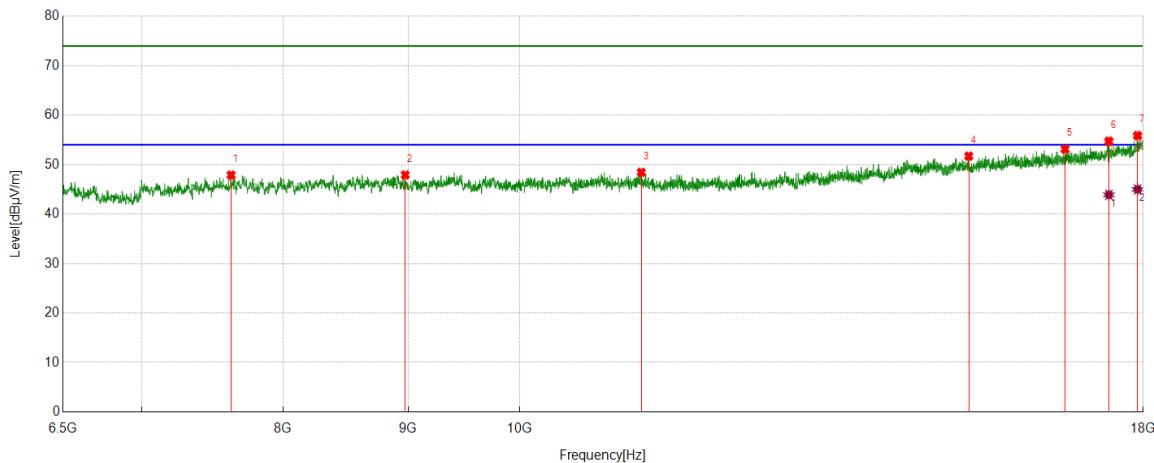
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17631.9387	26.37	18.04	44.41	54.00	-9.59	Horizontal
2	17953.9923	25.86	19.54	45.40	54.00	-8.60	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7617.6029	42.76	5.12	47.88	74.00	-26.12	Vertical
2	8976.7461	41.66	6.25	47.91	74.00	-26.09	Vertical
3	11213.8690	41.12	7.32	48.44	74.00	-25.56	Vertical
4	15270.2117	38.28	13.44	51.72	74.00	-22.28	Vertical
5	16721.3702	36.82	16.31	53.13	74.00	-20.87	Vertical
6	17426.8211	37.23	17.51	54.74	74.00	-19.26	Vertical
7	17904.1507	36.67	19.21	55.88	74.00	-18.12	Vertical

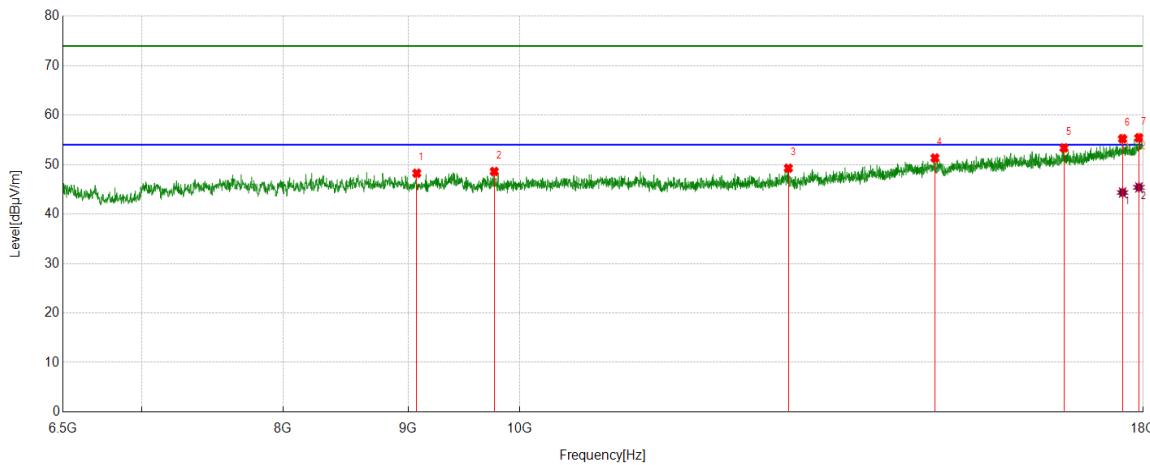
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17426.8211	26.39	17.51	43.90	54.00	-10.10	Vertical
2	17904.1507	25.78	19.21	44.99	54.00	-9.01	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9074.5124	42.15	6.11	48.26	74.00	-25.74	Horizontal
2	9762.7105	42.11	6.50	48.61	74.00	-25.39	Horizontal
3	12881.6469	39.91	9.37	49.28	74.00	-24.72	Horizontal
4	14790.9652	38.47	12.87	51.34	74.00	-22.66	Horizontal
5	16704.1174	37.45	15.93	53.38	74.00	-20.62	Horizontal
6	17653.0255	37.19	18.04	55.23	74.00	-18.77	Horizontal
7	17927.1545	36.05	19.37	55.42	74.00	-18.58	Horizontal

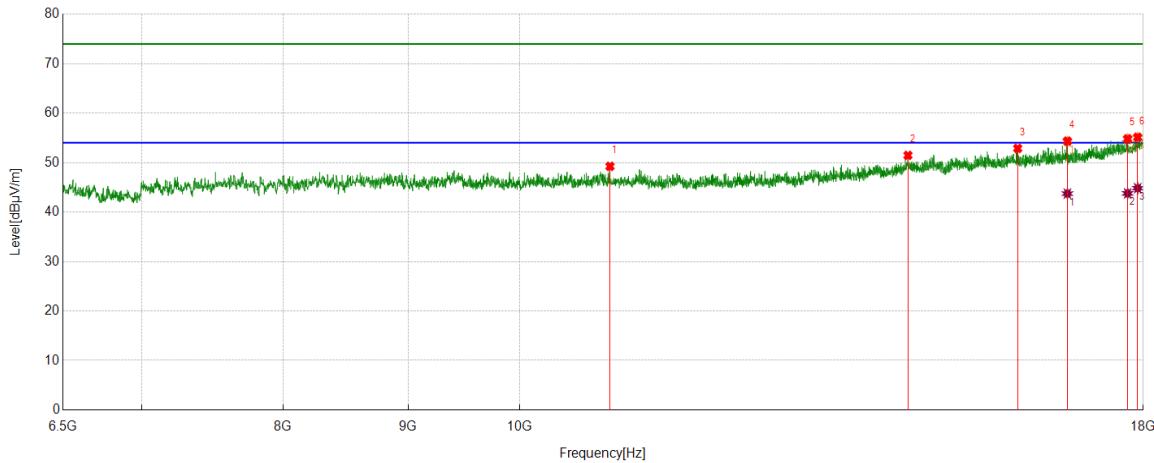
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17653.0255	26.32	18.04	44.36	54.00	-9.64	Horizontal
2	17927.1545	26.03	19.37	45.40	54.00	-8.60	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10887.9813	42.08	7.17	49.25	74.00	-24.75	Vertical
2	14419.0698	38.55	12.92	51.47	74.00	-22.53	Vertical
3	15990.9985	38.34	14.54	52.88	74.00	-21.12	Vertical
4	16757.7930	38.20	16.14	54.34	74.00	-19.66	Vertical
5	17737.3729	36.29	18.53	54.82	74.00	-19.18	Vertical
6	17906.0677	35.90	19.22	55.12	74.00	-18.88	Vertical

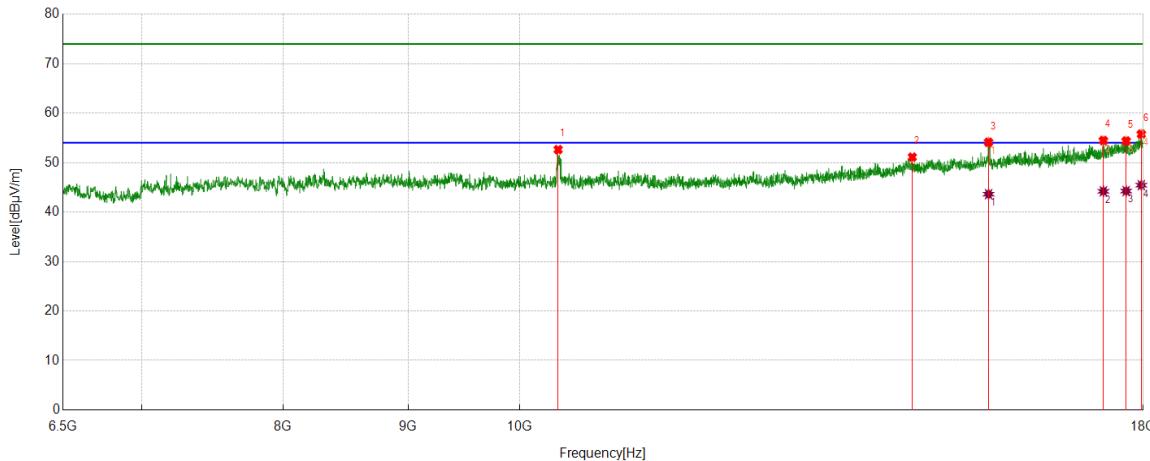
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16757.7930	27.59	16.14	43.73	54.00	-10.27	Vertical
2	17737.3729	25.25	18.53	43.78	54.00	-10.22	Vertical
3	17906.0677	25.61	19.22	44.83	54.00	-9.17	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10368.4781	45.97	6.66	52.63	74.00	-21.37	Horizontal
2	14478.4964	38.25	12.86	51.11	74.00	-22.89	Horizontal
3	15557.7596	40.43	13.69	54.12	74.00	-19.88	Horizontal
4	17336.7228	37.32	17.16	54.48	74.00	-19.52	Horizontal
5	17712.4521	35.99	18.38	54.37	74.00	-19.63	Horizontal
6	17967.4112	36.13	19.63	55.76	74.00	-18.24	Horizontal

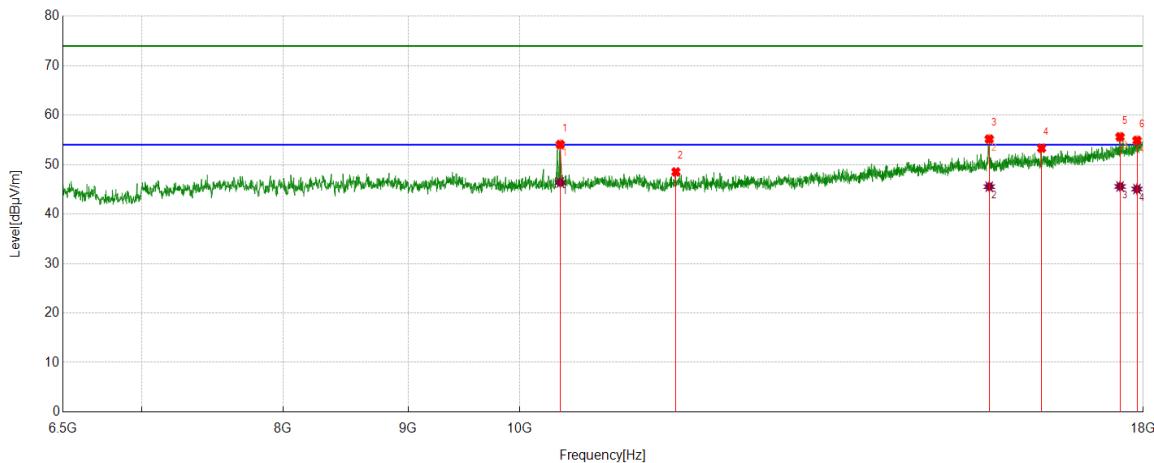
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15557.7596	29.93	13.69	43.62	54.00	-10.38	Horizontal
2	17336.7228	27.04	17.16	44.20	54.00	-9.80	Horizontal
3	17712.4521	25.87	18.38	44.25	54.00	-9.75	Horizontal
4	17967.4112	25.81	19.63	45.44	54.00	-8.56	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10389.5649	47.45	6.61	54.06	74.00	-19.94	Vertical
2	11585.7643	40.85	7.68	48.53	74.00	-25.47	Vertical
3	15567.3446	41.53	13.64	55.17	74.00	-18.83	Vertical
4	16355.2259	38.30	15.02	53.32	74.00	-20.68	Vertical
5	17610.8518	37.56	18.06	55.62	74.00	-18.38	Vertical
6	17894.5658	35.65	19.25	54.90	74.00	-19.10	Vertical

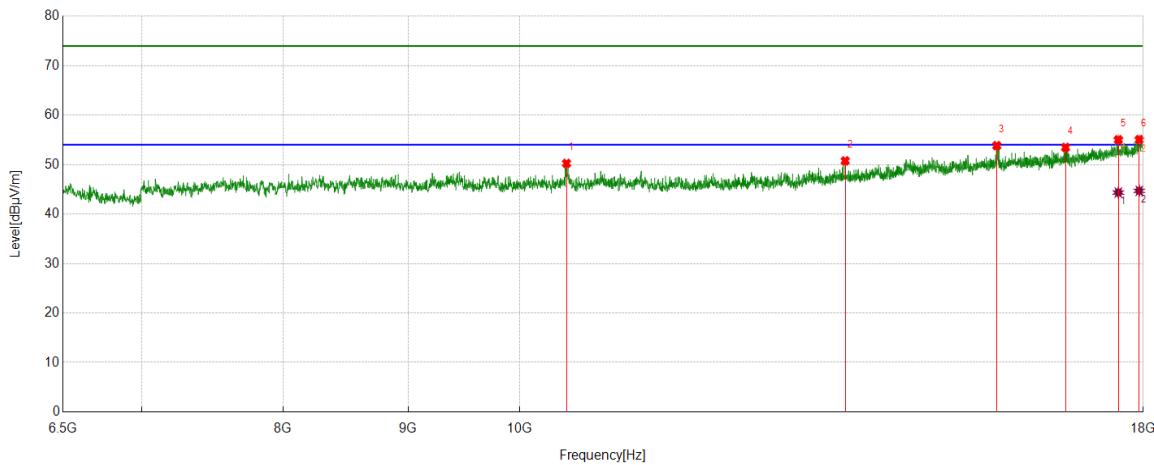
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10389.5649	39.78	6.61	46.39	54.00	-7.61	Vertical
2	15567.3446	31.90	13.64	45.54	54.00	-8.46	Vertical
3	17610.8518	27.52	18.06	45.58	54.00	-8.42	Vertical
4	17894.5658	25.81	19.25	45.06	54.00	-8.94	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10450.9085	43.61	6.64	50.25	74.00	-23.75	Horizontal
2	13590.9318	40.03	10.73	50.76	74.00	-23.24	Horizontal
3	15678.5298	40.02	13.81	53.83	74.00	-20.17	Horizontal
4	16729.0382	37.30	16.17	53.47	74.00	-20.53	Horizontal
5	17582.0970	37.05	17.97	55.02	74.00	-18.98	Horizontal
6	17932.9055	35.67	19.39	55.06	74.00	-18.94	Horizontal

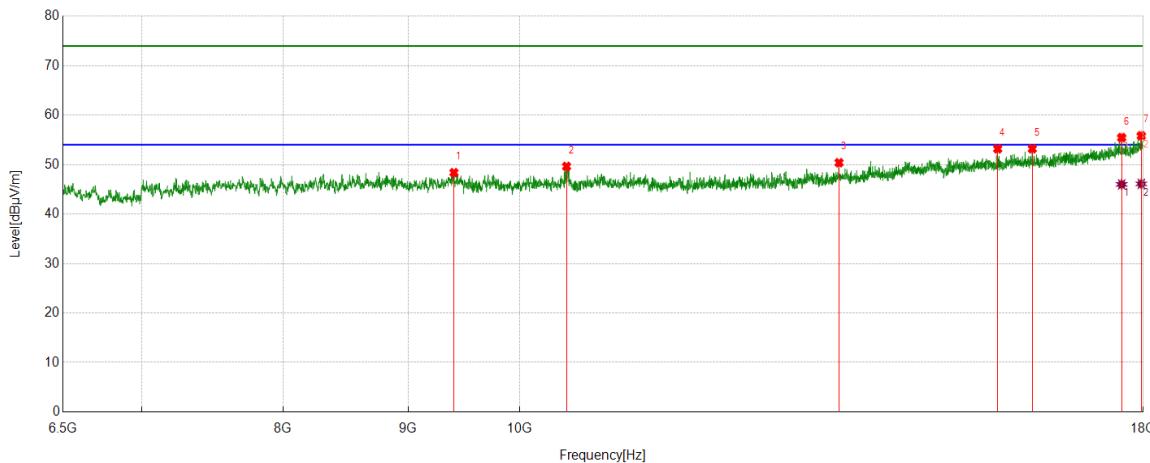
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17582.0970	26.38	17.97	44.35	54.00	-9.65	Horizontal
2	17932.9055	25.31	19.39	44.70	54.00	-9.30	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9398.4831	41.78	6.60	48.38	74.00	-25.62	Vertical
2	10450.9085	43.00	6.64	49.64	74.00	-24.36	Vertical
3	13512.3354	39.60	10.79	50.39	74.00	-23.61	Vertical
4	15691.9487	39.33	13.86	53.19	74.00	-20.81	Vertical
5	16213.3689	38.03	15.17	53.20	74.00	-20.80	Vertical
6	17637.6896	37.45	18.01	55.46	74.00	-18.54	Vertical
7	17967.4112	36.21	19.63	55.84	74.00	-18.16	Vertical

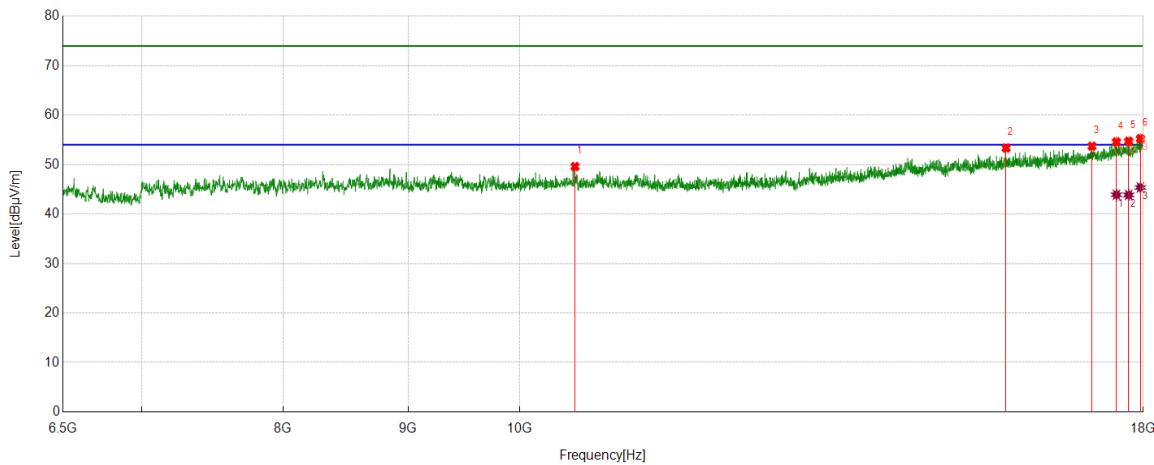
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17637.6896	27.99	18.01	46.00	54.00	-8.00	Vertical
2	17967.4112	26.48	19.63	46.11	54.00	-7.89	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10535.2559	42.81	6.80	49.61	74.00	-24.39	Horizontal
2	15816.5528	38.90	14.45	53.35	74.00	-20.65	Horizontal
3	17150.7751	37.27	16.46	53.73	74.00	-20.27	Horizontal
4	17551.4252	36.85	17.74	54.59	74.00	-19.41	Horizontal
5	17754.6258	36.17	18.56	54.73	74.00	-19.27	Horizontal
6	17952.0753	35.74	19.52	55.26	74.00	-18.74	Horizontal

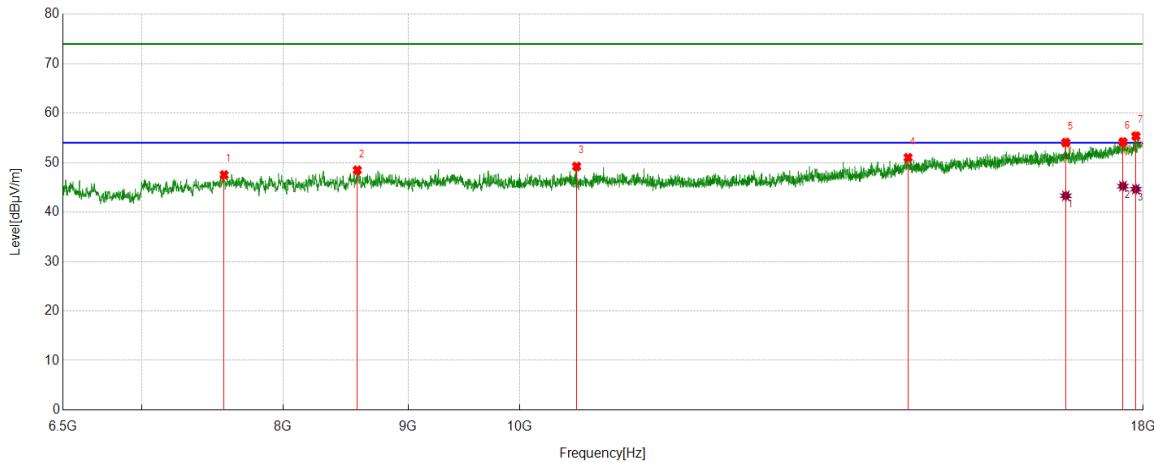
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17551.4252	26.16	17.74	43.90	54.00	-10.10	Horizontal
2	17754.6258	25.30	18.56	43.86	54.00	-10.14	Horizontal
3	17952.0753	25.86	19.52	45.38	54.00	-8.62	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7567.7613	42.73	4.79	47.52	74.00	-26.48	Vertical
2	8579.9300	42.03	6.45	48.48	74.00	-25.52	Vertical
3	10550.5918	42.30	6.93	49.23	74.00	-24.77	Vertical
4	14420.9868	38.11	12.91	51.02	74.00	-22.98	Vertical
5	16732.8721	37.97	16.08	54.05	74.00	-19.95	Vertical
6	17658.7765	36.10	18.07	54.17	74.00	-19.83	Vertical
7	17875.3959	36.18	19.19	55.37	74.00	-18.63	Vertical

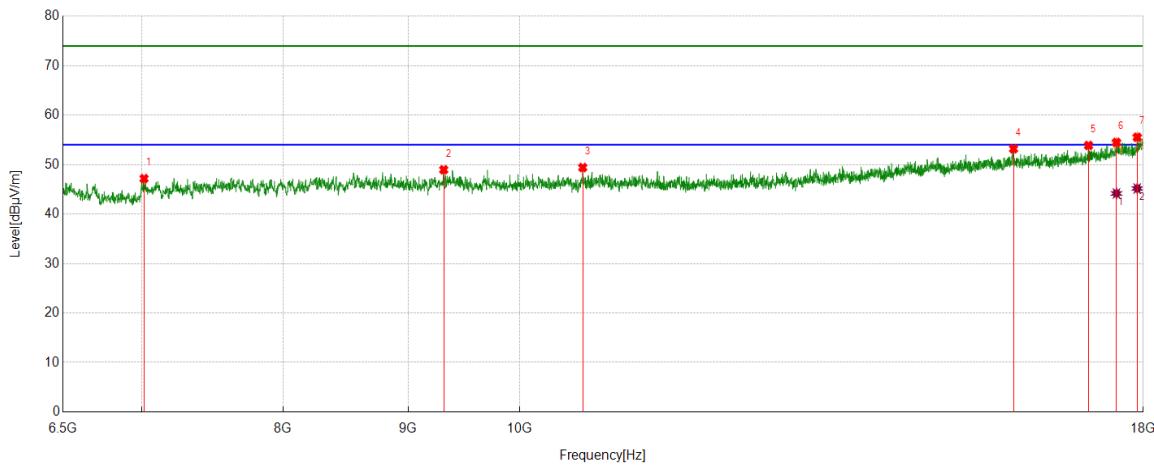
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16732.8721	27.22	16.08	43.30	54.00	-10.70	Vertical
2	17658.7765	27.17	18.07	45.24	54.00	-8.76	Vertical
3	17875.3959	25.43	19.19	44.62	54.00	-9.38	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7017.5863	43.46	3.72	47.18	74.00	-26.82	Horizontal
2	9308.3847	42.72	6.24	48.96	74.00	-25.04	Horizontal
3	10611.9353	42.49	6.92	49.41	74.00	-24.59	Horizontal
4	15927.7380	38.60	14.60	53.20	74.00	-20.80	Horizontal
5	17095.1825	37.42	16.46	53.88	74.00	-20.12	Horizontal
6	17551.4252	36.75	17.74	54.49	74.00	-19.51	Horizontal
7	17898.3997	36.33	19.21	55.54	74.00	-18.46	Horizontal

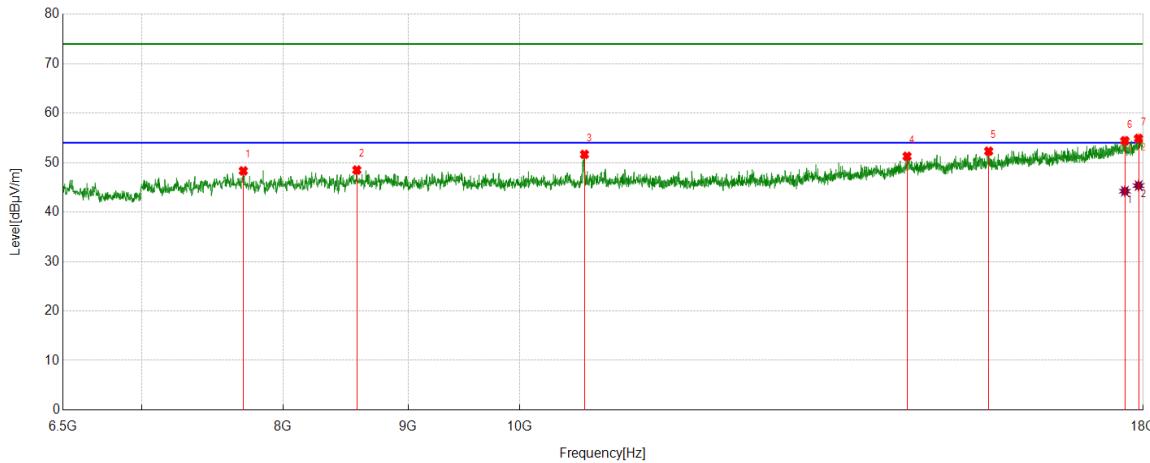
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17551.4252	26.43	17.74	44.17	54.00	-9.83	Horizontal
2	17898.3997	25.96	19.21	45.17	54.00	-8.83	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7705.7843	42.97	5.36	48.33	74.00	-25.67	Vertical
2	8576.0960	42.14	6.36	48.50	74.00	-25.50	Vertical
3	10629.1882	44.66	7.01	51.67	74.00	-22.33	Vertical
4	14407.5679	38.42	12.85	51.27	74.00	-22.73	Vertical
5	15559.6766	38.64	13.67	52.31	74.00	-21.69	Vertical
6	17691.3652	36.23	18.19	54.42	74.00	-19.58	Vertical
7	17921.4036	35.53	19.36	54.89	74.00	-19.11	Vertical

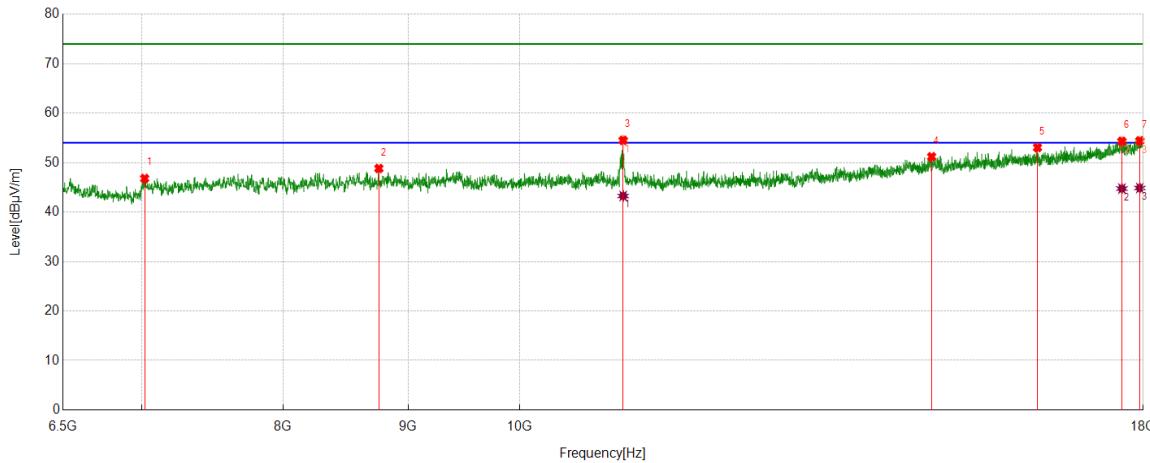
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17691.3652	26.03	18.19	44.22	54.00	-9.78	Vertical
2	17921.4036	25.99	19.36	45.35	54.00	-8.65	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7021.4202	43.03	3.76	46.79	74.00	-27.21	Horizontal
2	8756.2927	42.56	6.26	48.82	74.00	-25.18	Horizontal
3	11024.0873	47.29	7.22	54.51	74.00	-19.49	Horizontal
4	14744.9575	38.31	12.88	51.19	74.00	-22.81	Horizontal
5	16291.9653	38.10	14.95	53.05	74.00	-20.95	Horizontal
6	17641.5236	36.31	18.00	54.31	74.00	-19.69	Horizontal
7	17942.4904	34.95	19.46	54.41	74.00	-19.59	Horizontal

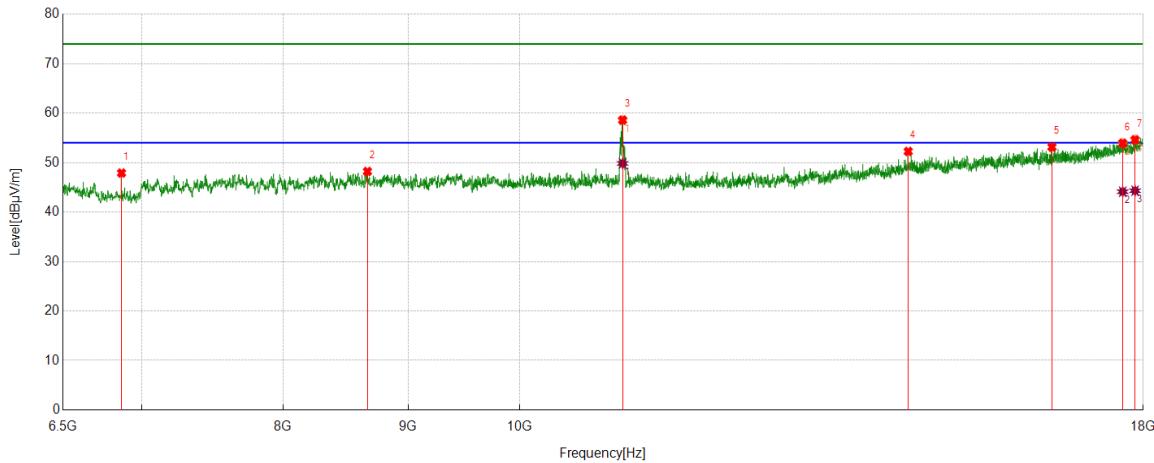
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11024.0873	36.03	7.22	43.25	54.00	-10.75	Horizontal
2	17641.5236	26.75	18.00	44.75	54.00	-9.25	Horizontal
3	17942.4904	25.41	19.46	44.87	54.00	-9.13	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6869.9783	44.63	3.26	47.89	74.00	-26.11	Vertical
2	8662.3604	41.85	6.36	48.21	74.00	-25.79	Vertical
3	11018.3364	51.40	7.20	58.60	74.00	-15.40	Vertical
4	14422.9038	39.36	12.90	52.26	74.00	-21.74	Vertical
5	16516.2527	37.24	15.91	53.15	74.00	-20.85	Vertical
6	17654.9425	35.88	18.04	53.92	74.00	-20.08	Vertical
7	17861.9770	35.36	19.26	54.62	74.00	-19.38	Vertical

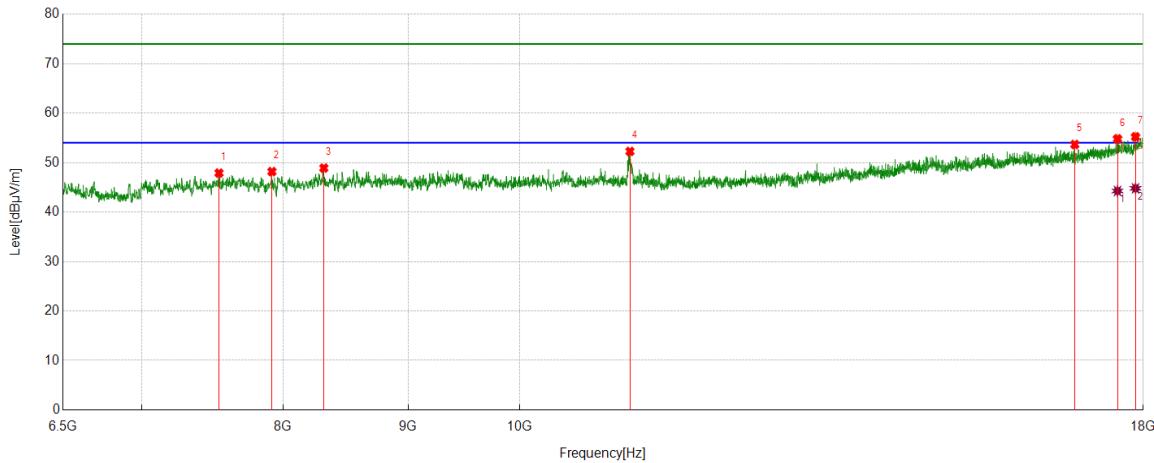
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11018.3364	42.64	7.20	49.84	54.00	-4.16	Vertical
2	17654.9425	26.08	18.04	44.12	54.00	-9.88	Vertical
3	17861.9770	25.06	19.26	44.32	54.00	-9.68	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7531.3386	43.51	4.38	47.89	74.00	-26.11	Horizontal
2	7916.6528	42.72	5.46	48.18	74.00	-25.82	Horizontal
3	8313.4689	42.71	6.19	48.90	74.00	-25.10	Horizontal
4	11095.0158	44.91	7.36	52.27	74.00	-21.73	Horizontal
5	16874.7291	37.59	16.08	53.67	74.00	-20.33	Horizontal
6	17568.6781	36.92	17.89	54.81	74.00	-19.19	Horizontal
7	17869.6449	36.02	19.20	55.22	74.00	-18.78	Horizontal

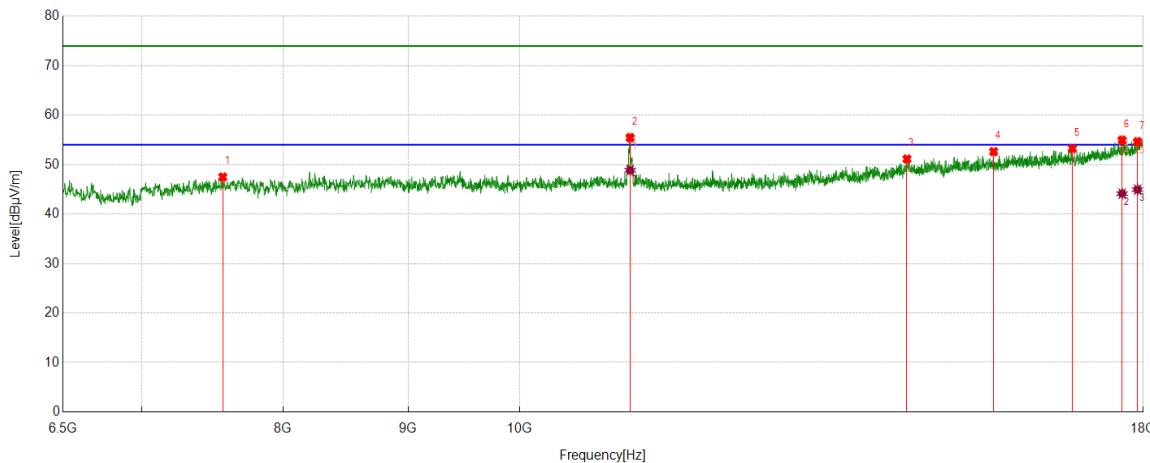
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17568.6781	26.38	17.89	44.27	54.00	-9.73	Horizontal
2	17869.6449	25.60	19.20	44.80	54.00	-9.20	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7558.1764	42.99	4.51	47.50	74.00	-26.50	Vertical
2	11096.9328	48.09	7.36	55.45	74.00	-18.55	Vertical
3	14405.6509	38.32	12.82	51.14	74.00	-22.86	Vertical
4	15632.5221	38.96	13.67	52.63	74.00	-21.37	Vertical
5	16838.3064	36.94	16.32	53.26	74.00	-20.74	Vertical
6	17645.3576	36.92	18.02	54.94	74.00	-19.06	Vertical
7	17904.1507	35.42	19.21	54.63	74.00	-19.37	Vertical

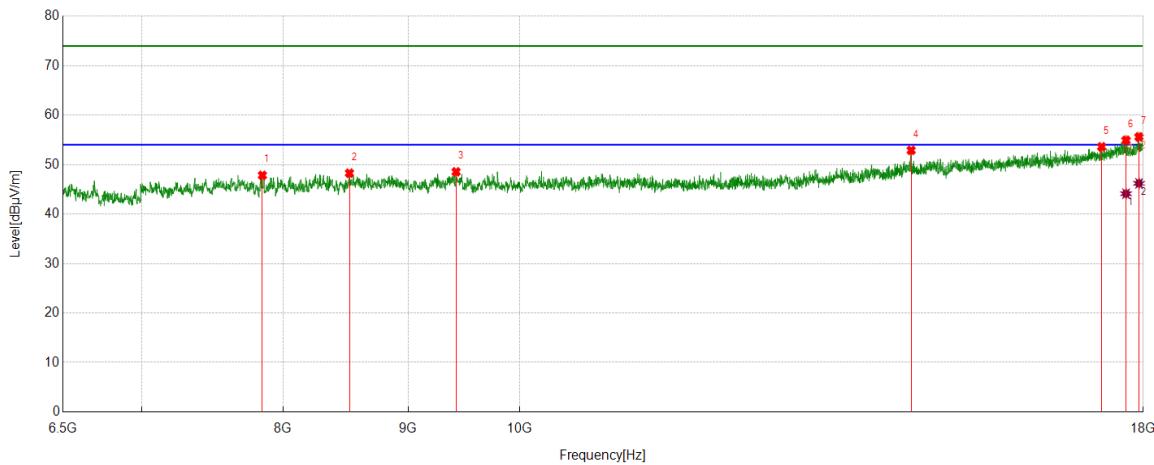
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	11096.9328	41.50	7.36	48.86	54.00	-5.14	Vertical
2	17645.3576	26.12	18.02	44.14	54.00	-9.86	Vertical
3	17904.1507	25.74	19.21	44.95	54.00	-9.05	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5670	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7845.7243	42.43	5.40	47.83	74.00	-26.17	Horizontal
2	8516.6694	41.98	6.30	48.28	74.00	-25.72	Horizontal
3	9417.6529	41.89	6.65	48.54	74.00	-25.46	Horizontal
4	14463.1605	40.06	12.83	52.89	74.00	-21.11	Horizontal
5	17307.9680	36.61	16.99	53.60	74.00	-20.40	Horizontal
6	17710.5351	36.56	18.37	54.93	74.00	-19.07	Horizontal
7	17929.0715	36.24	19.37	55.61	74.00	-18.39	Horizontal

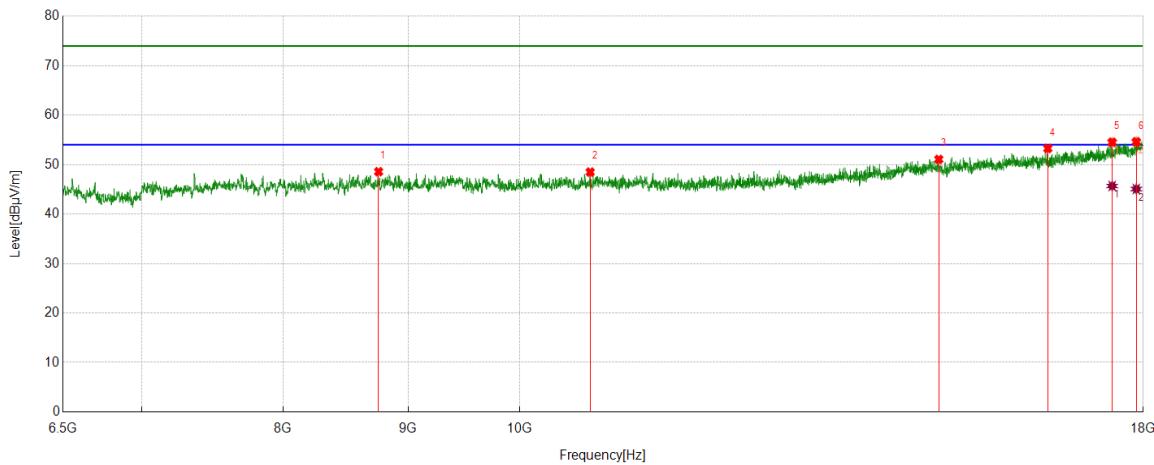
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17710.5351	25.75	18.37	44.12	54.00	-9.88	Horizontal
2	17929.0715	26.84	19.37	46.21	54.00	-7.79	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5670	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8754.3757	42.29	6.28	48.57	74.00	-25.43	Vertical
2	10686.6978	41.48	7.01	48.49	74.00	-25.51	Vertical
3	14844.6408	38.20	12.86	51.06	74.00	-22.94	Vertical
4	16451.0752	37.74	15.53	53.27	74.00	-20.73	Vertical
5	17480.4967	36.87	17.65	54.52	74.00	-19.48	Vertical
6	17883.0638	35.41	19.22	54.63	74.00	-19.37	Vertical

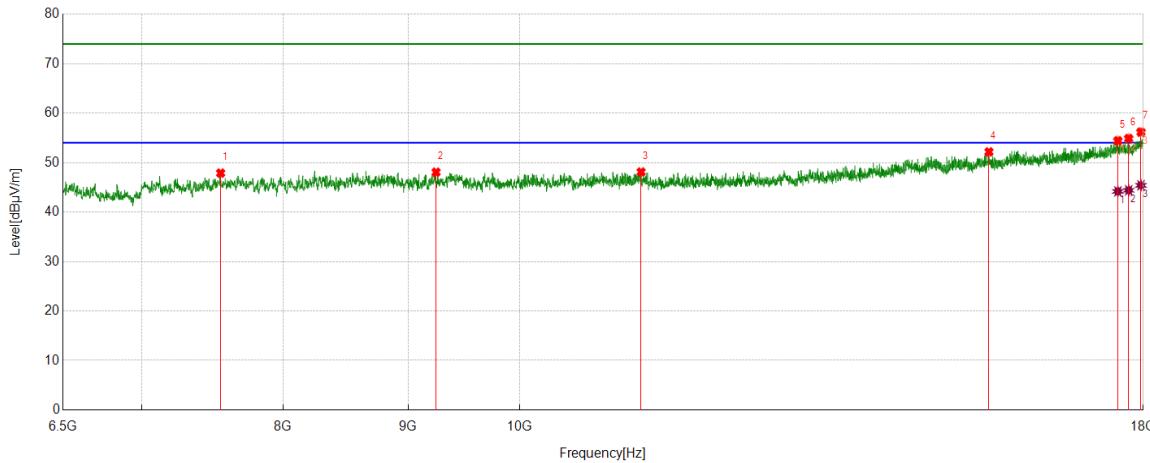
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17480.4967	28.03	17.65	45.68	54.00	-8.32	Vertical
2	17883.0638	25.85	19.22	45.07	54.00	-8.93	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5710	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7542.8405	43.32	4.56	47.88	74.00	-26.12	Horizontal
2	9241.2902	41.93	6.14	48.07	74.00	-25.93	Horizontal
3	11211.9520	40.74	7.36	48.10	74.00	-25.90	Horizontal
4	15563.5106	38.52	13.65	52.17	74.00	-21.83	Horizontal
5	17574.4291	36.50	17.92	54.42	74.00	-19.58	Horizontal
6	17754.6258	36.33	18.56	54.89	74.00	-19.11	Horizontal
7	17961.6603	36.55	19.63	56.18	74.00	-17.82	Horizontal

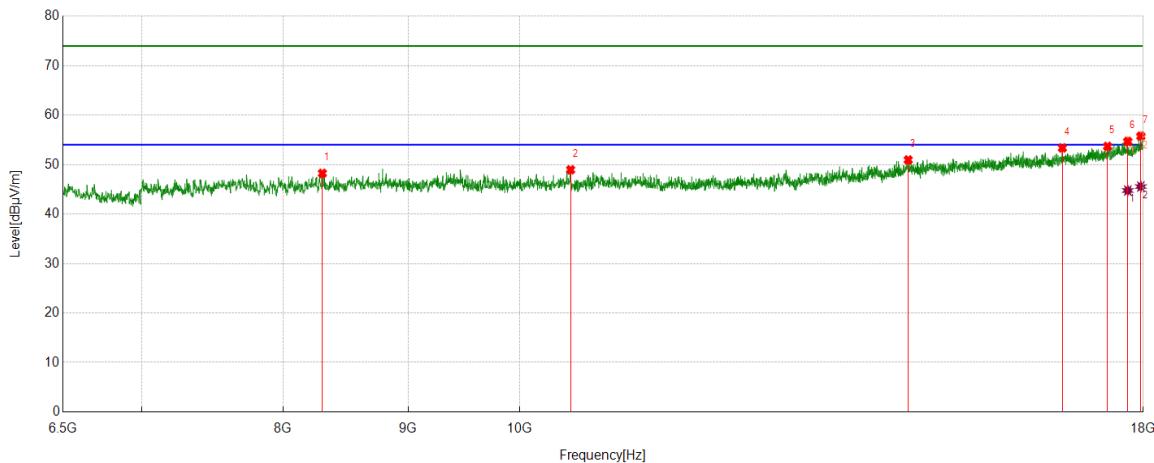
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17574.4291	26.26	17.92	44.18	54.00	-9.82	Horizontal
2	17754.6258	25.84	18.56	44.40	54.00	-9.60	Horizontal
3	17961.6603	25.78	19.63	45.41	54.00	-8.59	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5710	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8301.9670	41.94	6.30	48.24	74.00	-25.76	Vertical
2	10491.1652	42.05	6.91	48.96	74.00	-25.04	Vertical
3	14422.9038	38.05	12.90	50.95	74.00	-23.05	Vertical
4	16679.1965	37.71	15.66	53.37	74.00	-20.63	Vertical
5	17403.8173	36.31	17.37	53.68	74.00	-20.32	Vertical
6	17739.2899	36.15	18.54	54.69	74.00	-19.31	Vertical
7	17959.7433	36.13	19.63	55.76	74.00	-18.24	Vertical

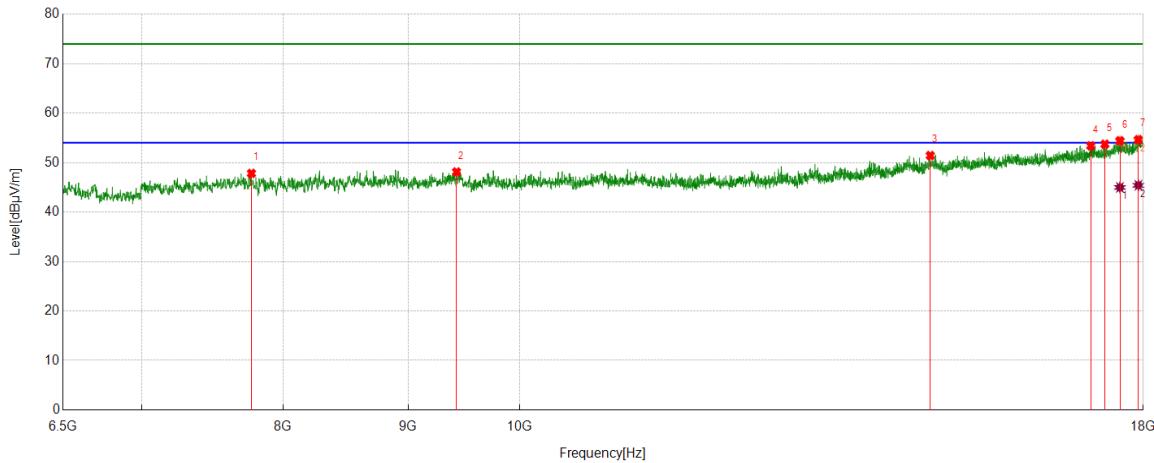
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17739.2899	26.22	18.54	44.76	54.00	-9.24	Vertical
2	17959.7433	25.93	19.63	45.56	54.00	-8.44	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5755	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7765.2109	42.74	5.08	47.82	74.00	-26.18	Horizontal
2	9421.4869	41.43	6.68	48.11	74.00	-25.89	Horizontal
3	14725.7876	38.63	12.80	51.43	74.00	-22.57	Horizontal
4	17131.6053	36.80	16.59	53.39	74.00	-20.61	Horizontal
5	17361.6436	36.43	17.29	53.72	74.00	-20.28	Horizontal
6	17608.9348	36.35	18.06	54.41	74.00	-19.59	Horizontal
7	17917.5696	35.31	19.33	54.64	74.00	-19.36	Horizontal

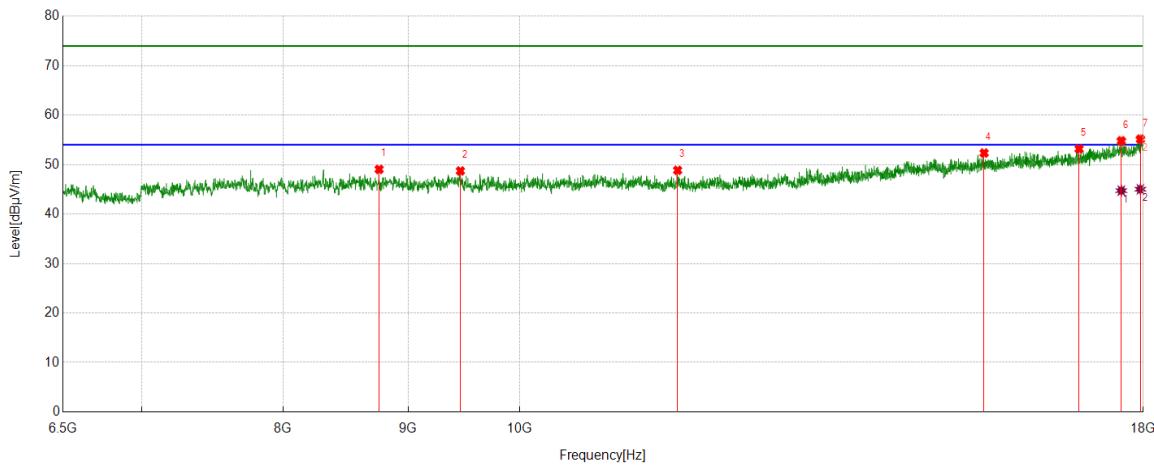
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17608.9348	26.92	18.06	44.98	54.00	-9.02	Horizontal
2	17917.5696	26.08	19.33	45.41	54.00	-8.59	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5755	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8758.2097	42.79	6.25	49.04	74.00	-24.96	Vertical
2	9455.9927	42.15	6.57	48.72	74.00	-25.28	Vertical
3	11604.9342	41.28	7.57	48.85	74.00	-25.15	Vertical
4	15492.5821	38.38	13.96	52.34	74.00	-21.66	Vertical
5	16943.7406	37.11	16.06	53.17	74.00	-20.83	Vertical
6	17631.9387	36.76	18.04	54.80	74.00	-19.20	Vertical
7	17952.0753	35.62	19.52	55.14	74.00	-18.86	Vertical

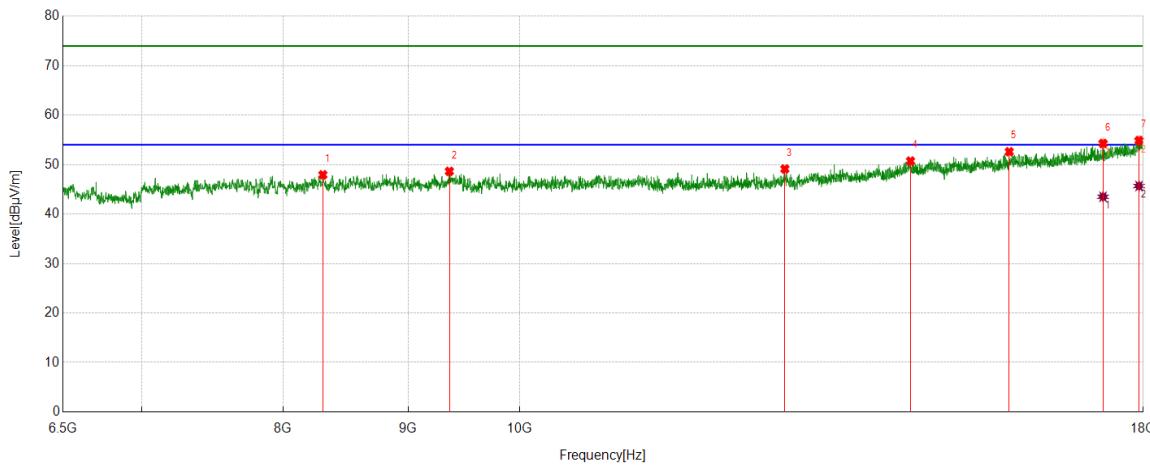
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17631.9387	26.70	18.04	44.74	54.00	-9.26	Vertical
2	17952.0753	25.50	19.52	45.02	54.00	-8.98	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5795	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8305.8010	41.62	6.32	47.94	74.00	-26.06	Horizontal
2	9358.2264	42.19	6.45	48.64	74.00	-25.36	Horizontal
3	12839.4732	40.00	9.12	49.12	74.00	-24.88	Horizontal
4	14453.5756	37.83	12.89	50.72	74.00	-23.28	Horizontal
5	15864.4774	37.95	14.66	52.61	74.00	-21.39	Horizontal
6	17330.9718	37.17	17.11	54.28	74.00	-19.72	Horizontal
7	17929.0715	35.50	19.37	54.87	74.00	-19.13	Horizontal

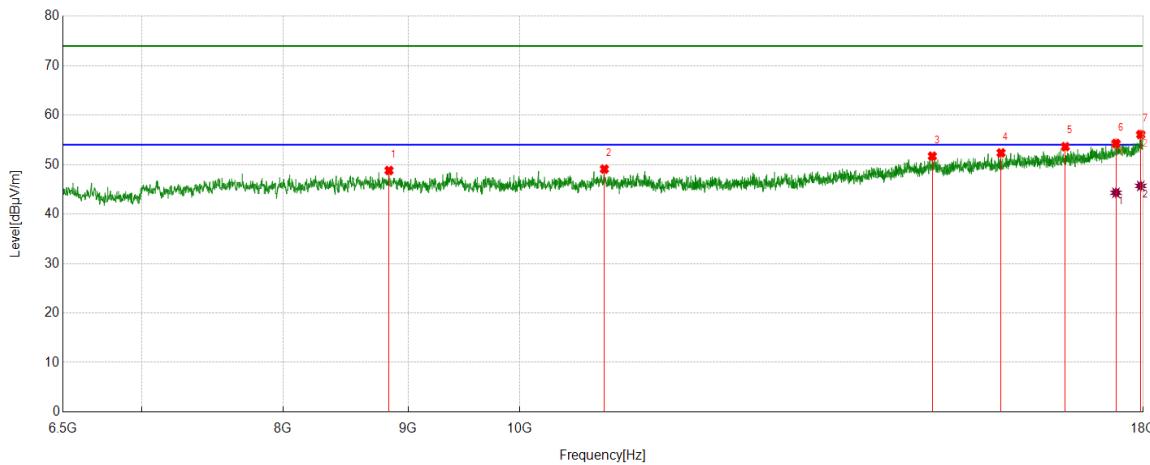
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17330.9718	26.39	17.11	43.50	54.00	-10.50	Horizontal
2	17929.0715	26.31	19.37	45.68	54.00	-8.32	Horizontal

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5795	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8840.6401	42.44	6.37	48.81	74.00	-25.19	Vertical
2	10830.4717	42.02	7.08	49.10	74.00	-24.90	Vertical
3	14754.5424	38.80	12.91	51.71	74.00	-22.29	Vertical
4	15741.7903	38.20	14.18	52.38	74.00	-21.62	Vertical
5	16725.2042	37.38	16.24	53.62	74.00	-20.38	Vertical
6	17543.7573	36.57	17.71	54.28	74.00	-19.72	Vertical
7	17957.8263	36.49	19.60	56.09	74.00	-17.91	Vertical

AV Result:

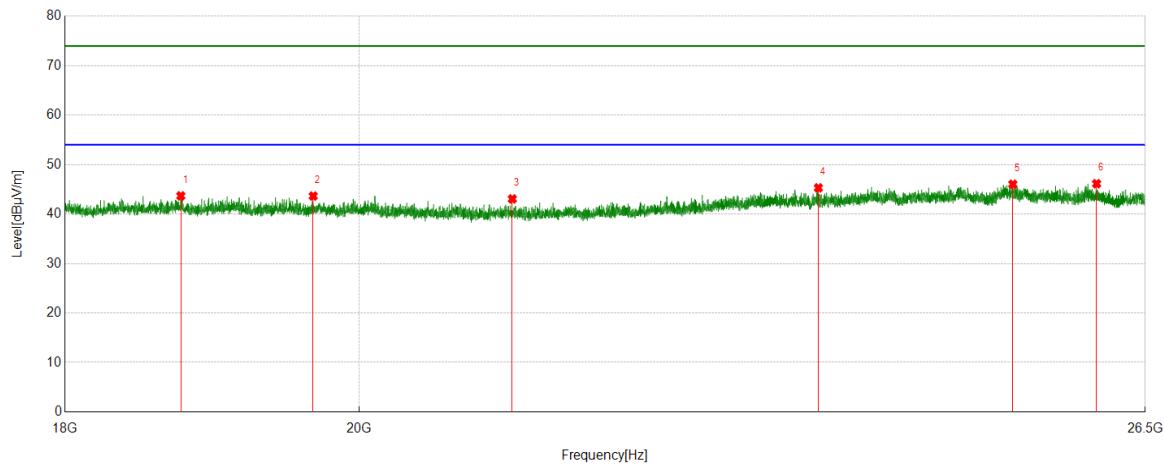
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17543.7573	26.60	17.71	44.31	54.00	-9.69	Vertical
2	17957.8263	26.09	19.60	45.69	54.00	-8.31	Vertical

Remark:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 3: 18GHz~26.5GHz
SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

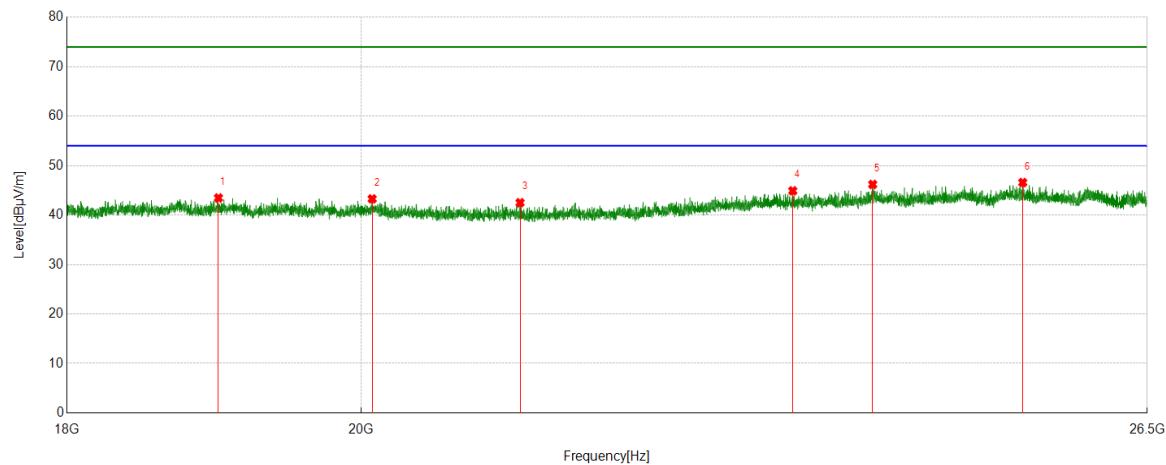
Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	18763.3763	49.89	-6.21	43.68	74.00	-30.32	Horizontal
2	19673.8174	49.05	-5.41	43.64	74.00	-30.36	Horizontal
3	21127.4627	49.03	-5.97	43.06	74.00	-30.94	Horizontal
4	23574.0074	48.41	-3.11	45.30	74.00	-28.70	Horizontal
5	25273.3273	49.37	-3.34	46.03	74.00	-27.97	Horizontal
6	26042.6543	48.77	-2.63	46.14	74.00	-27.86	Horizontal

Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.

Test Mode	Channel	Polarization	Verdict
11a	5745	Vertical	PASS

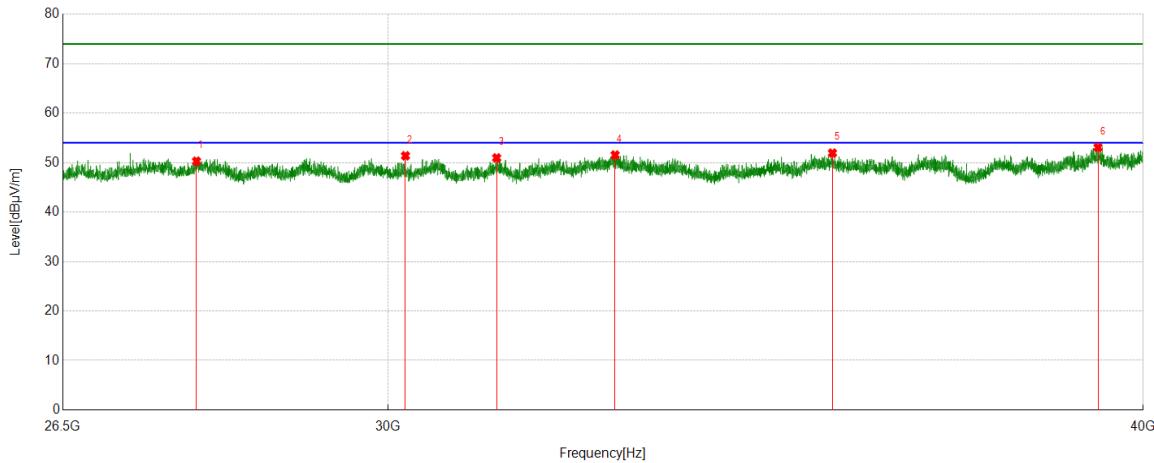

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	19003.9504	49.54	-6.08	43.46	74.00	-30.54	Vertical
2	20079.3079	48.40	-5.13	43.27	74.00	-30.73	Vertical
3	21170.8171	48.46	-5.96	42.50	74.00	-31.50	Vertical
4	23341.9342	48.17	-3.27	44.90	74.00	-29.10	Vertical
5	24019.4519	48.83	-2.63	46.20	74.00	-27.80	Vertical
6	25344.7345	49.87	-3.29	46.58	74.00	-27.42	Vertical

Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.

Part 4: 26.5GHz~40GHz
SPURIOUS EMISSIONS 26.5GHz TO 40GHz (WORST-CASE CONFIGURATION)

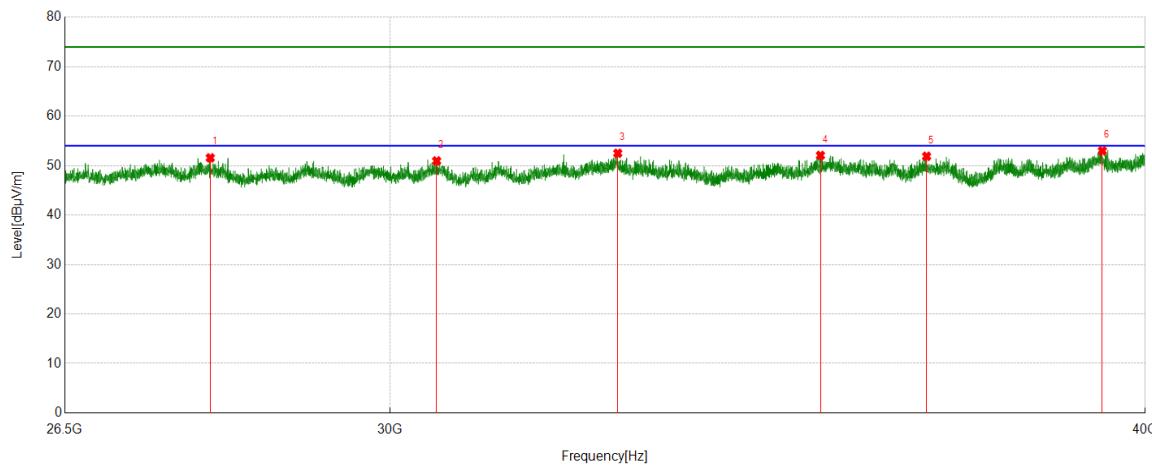
Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	27885.2385	57.17	-6.89	50.28	74.00	-23.72	Horizontal
2	30196.6697	58.13	-6.75	51.38	74.00	-22.62	Horizontal
3	31264.6265	58.77	-7.82	50.95	74.00	-23.05	Horizontal
4	32707.9208	57.34	-5.80	51.54	74.00	-22.46	Horizontal
5	35532.4032	54.72	-2.79	51.93	74.00	-22.07	Horizontal
6	39316.8317	50.06	3.00	53.06	74.00	-20.94	Horizontal

Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.

Test Mode	Channel	Polarization	Verdict
11a	5745	Vertical	PASS

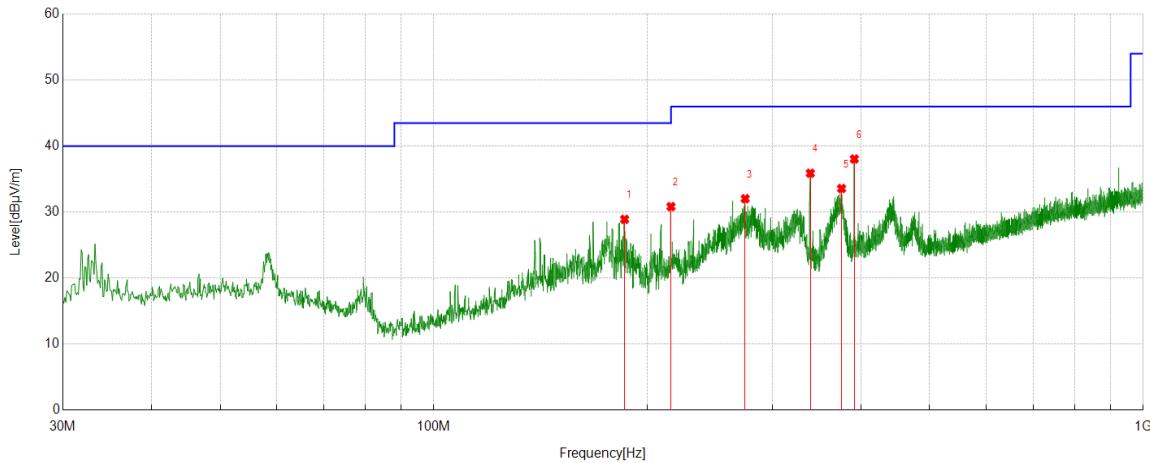

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	28010.8011	58.40	-6.83	51.57	74.00	-22.43	Vertical
2	30534.2034	57.96	-7.01	50.95	74.00	-23.05	Vertical
3	32716.0216	58.30	-5.80	52.50	74.00	-21.50	Vertical
4	35343.3843	55.39	-3.33	52.06	74.00	-21.94	Vertical
5	36802.8803	52.51	-0.63	51.88	74.00	-22.12	Vertical
6	39351.9352	49.92	3.06	52.98	74.00	-21.02	Vertical

Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.

Part 5: 30MHz~1GHz
SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS



No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	[dBuV]	[dB/m]	(dBuV/m)	(dBuV/m)	(dB)	
1	185.7976	10.81	18.09	28.90	43.50	-14.60	peak
2	215.9676	13.53	17.30	30.83	43.50	-12.67	peak
3	274.7555	11.75	20.28	32.03	46.00	-13.97	peak
4	339.4609	13.78	22.11	35.89	46.00	-10.11	peak
5	375.6456	10.55	23.02	33.57	46.00	-12.43	peak
6	391.5552	14.54	23.51	38.05	46.00	-7.95	peak

Remark: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.