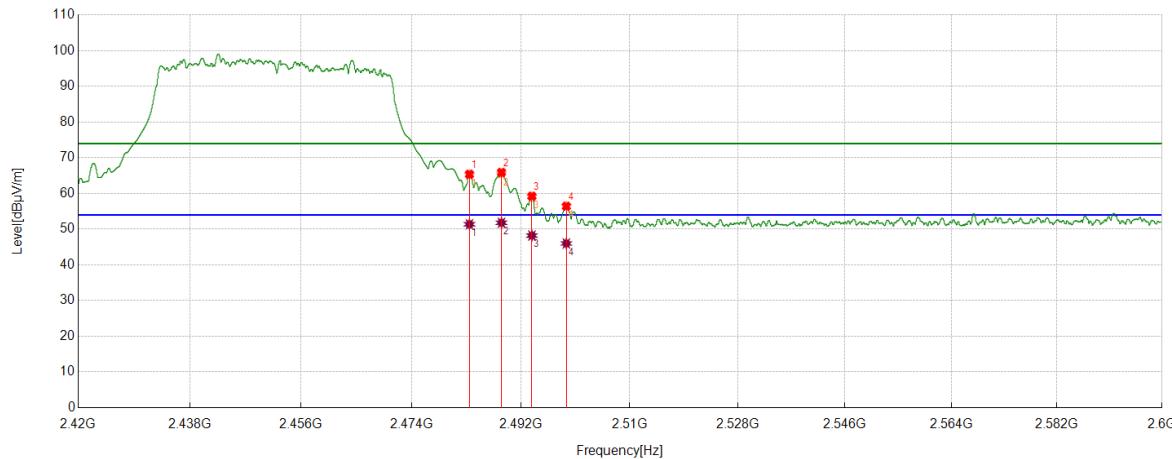


Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	51.26	14.12	65.38	74.00	-8.62	Horizontal
2	2488.7686	51.67	14.23	65.90	74.00	-8.10	Horizontal
3	2493.7867	45.00	14.22	59.22	74.00	-14.78	Horizontal
4	2499.4799	42.23	14.19	56.42	74.00	-17.58	Horizontal

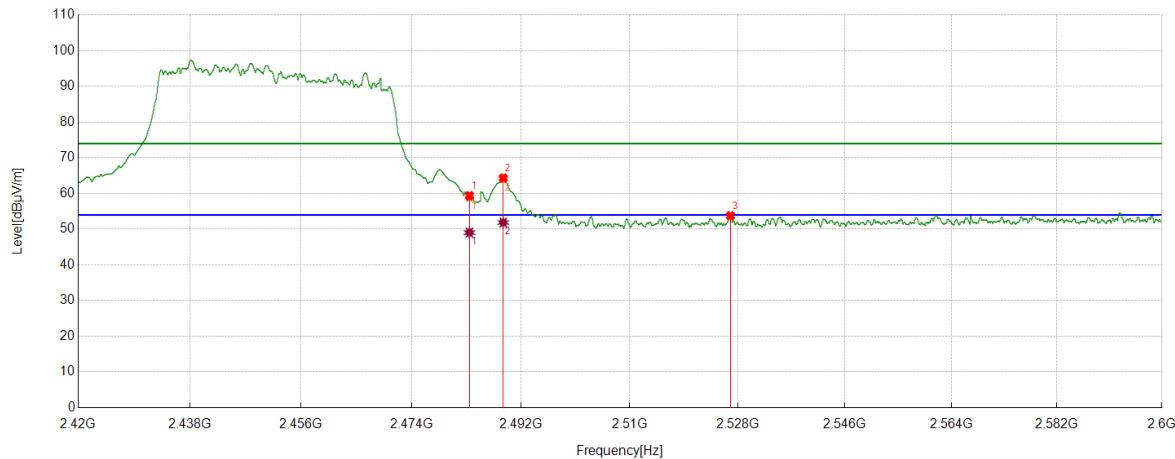
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	37.26	14.12	51.38	54.00	-2.62	Horizontal
2	2488.7686	37.57	14.23	51.80	54.00	-2.20	Horizontal
3	2493.7867	33.99	14.22	48.21	54.00	-5.79	Horizontal
4	2499.4799	31.81	14.19	46.00	54.00	-8.00	Horizontal

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	2483.5000	45.26	14.12	59.38	74.00	-14.62	Vertical
2	2489.0611	50.09	14.23	64.32	74.00	-9.68	Vertical
3	2526.7758	39.29	14.49	53.78	74.00	-20.22	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	2483.5000	34.92	14.12	49.04	54.00	-4.96	Vertical
2	2489.0611	37.64	14.23	51.87	54.00	-2.13	Vertical

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.4. SPURIOUS EMISSIONS

TEST RESULTS TABLE

1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AX HE20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AX HE40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

2) For 9kHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:

- 1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:

- 1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz

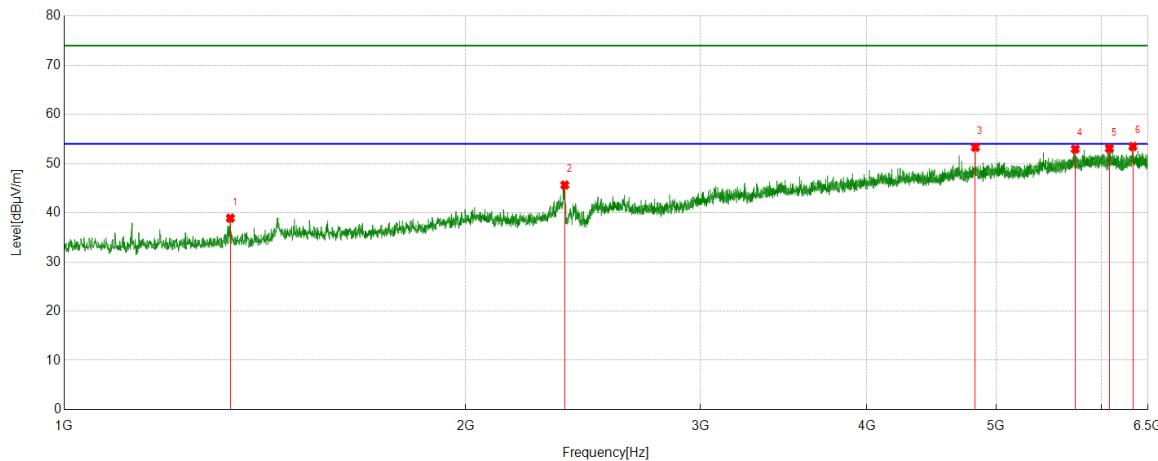
Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:

- 1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

Part 1: 1GHz~6.5GHz
HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

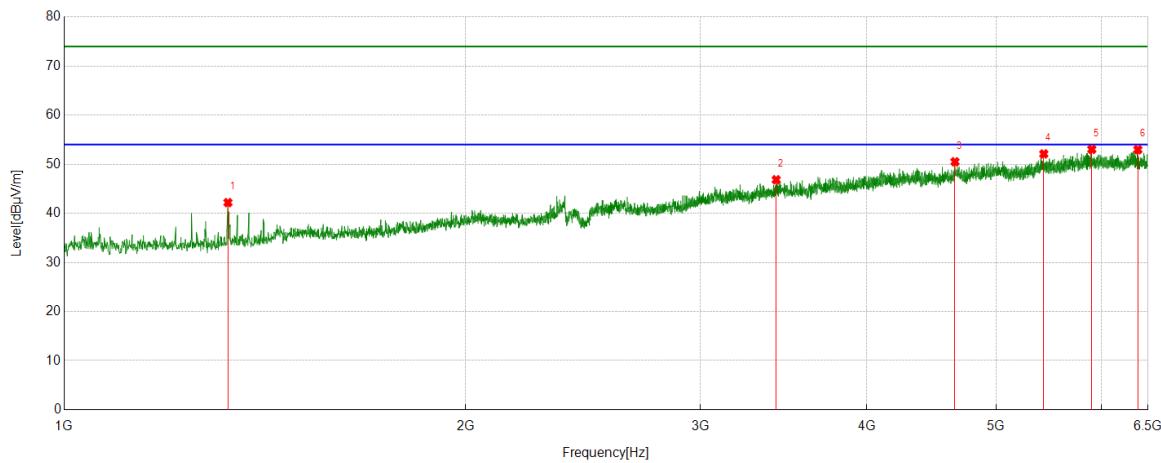

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1332.4814	40.25	-1.35	38.90	74.00	-35.10	Horizontal
2	2373.9304	40.67	4.97	45.64	74.00	-28.36	Horizontal
3	4824.1471	37.89	15.43	53.32	74.00	-20.68	Horizontal
4	5732.3592	35.30	17.65	52.95	74.00	-21.05	Horizontal
5	6080.7312	34.80	18.30	53.10	74.00	-20.90	Horizontal
6	6332.5369	34.10	19.38	53.48	74.00	-20.52	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

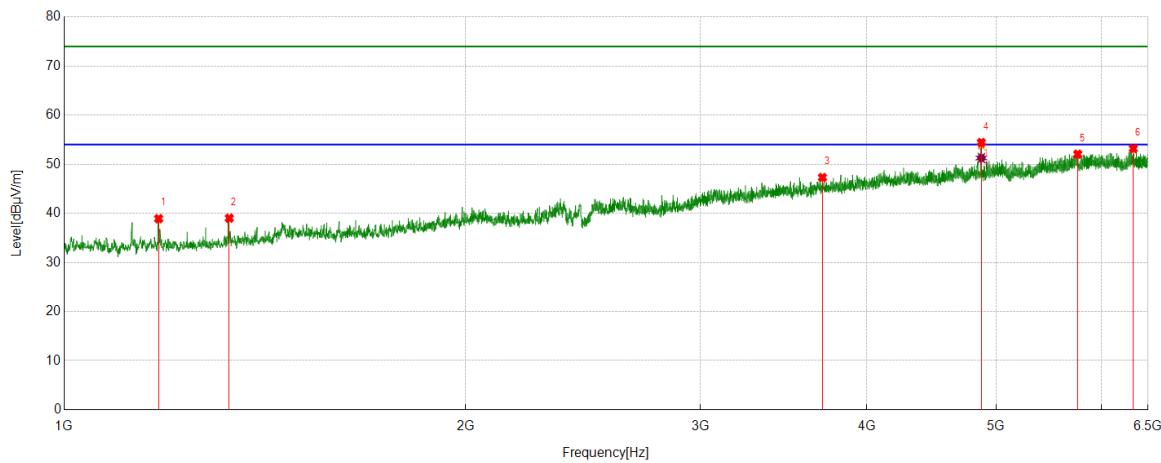

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1326.9808	43.60	-1.41	42.19	74.00	-31.81	Vertical
2	3420.2689	36.05	10.79	46.84	74.00	-27.16	Vertical
3	4657.2953	35.81	14.69	50.50	74.00	-23.50	Vertical
4	5429.2144	34.55	17.55	52.10	74.00	-21.90	Vertical
5	5898.5998	35.18	17.85	53.03	74.00	-20.97	Vertical
6	6386.9319	33.62	19.35	52.97	74.00	-21.03	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.2419	40.76	-1.84	38.92	74.00	-35.08	Horizontal
2	1330.0367	40.35	-1.33	39.02	74.00	-34.98	Horizontal
3	3704.4672	35.42	11.88	47.30	74.00	-26.70	Horizontal
4	4874.2638	39.63	14.79	54.42	74.00	-19.58	Horizontal
5	5756.8063	33.92	18.13	52.05	74.00	-21.95	Horizontal
6	6336.2040	33.92	19.28	53.20	74.00	-20.80	Horizontal

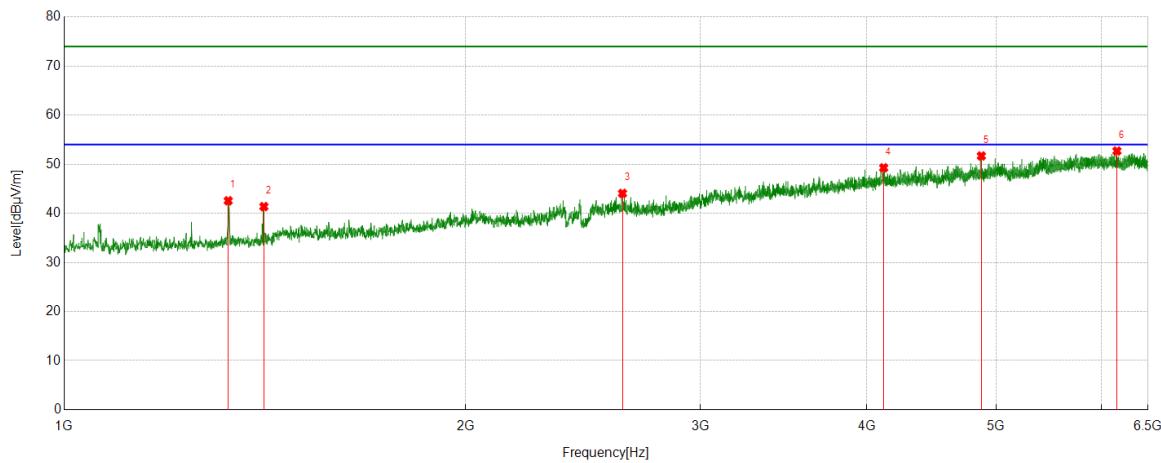
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4874.2638	36.48	14.79	51.27	54.00	-2.73	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

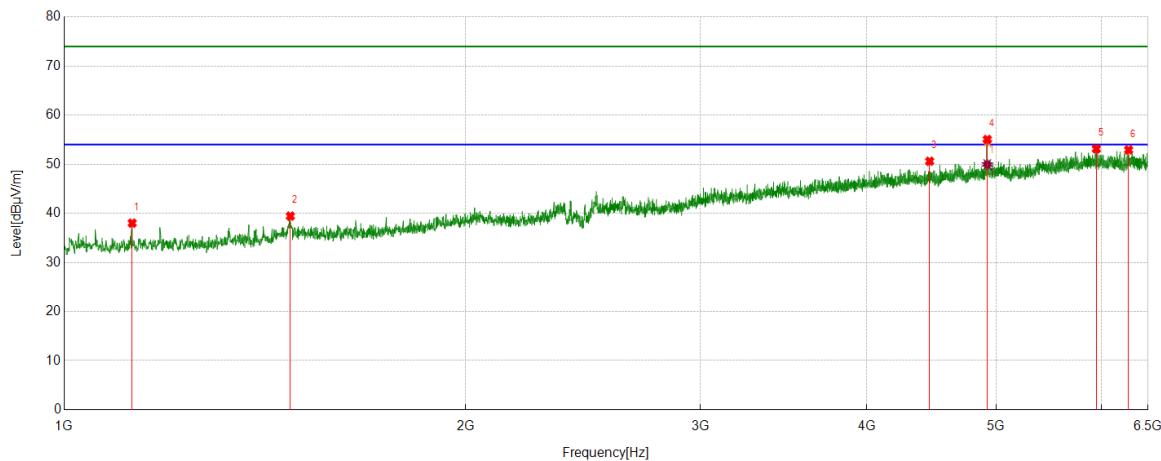

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1327.5920	43.95	-1.39	42.56	74.00	-31.44	Vertical
2	1411.9347	42.76	-1.38	41.38	74.00	-32.62	Vertical
3	2622.6803	37.47	6.59	44.06	74.00	-29.94	Vertical
4	4117.6242	35.44	13.83	49.27	74.00	-24.73	Vertical
5	4874.2638	36.90	14.79	51.69	74.00	-22.31	Vertical
6	6160.1845	33.89	18.81	52.70	74.00	-21.30	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1124.6805	40.08	-2.07	38.01	74.00	-35.99	Horizontal
2	1477.9420	39.33	0.11	39.44	74.00	-34.56	Horizontal
3	4458.0509	36.36	14.25	50.61	74.00	-23.39	Horizontal
4	4924.3805	39.80	15.24	55.04	74.00	-18.96	Horizontal
5	5945.0495	34.69	18.44	53.13	74.00	-20.87	Horizontal
6	6286.0873	34.17	18.75	52.92	74.00	-21.08	Horizontal

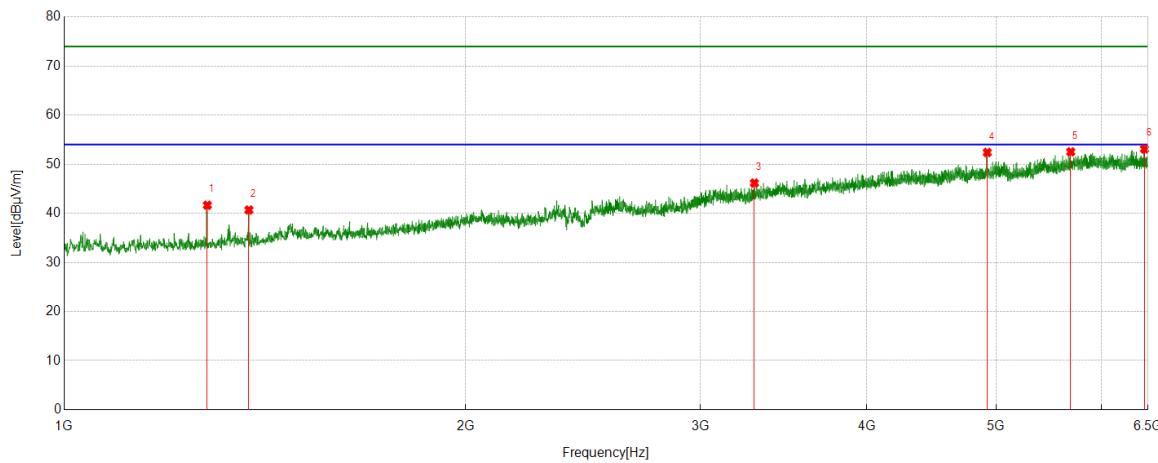
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4924.3805	34.72	15.24	49.96	54.00	-4.04	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

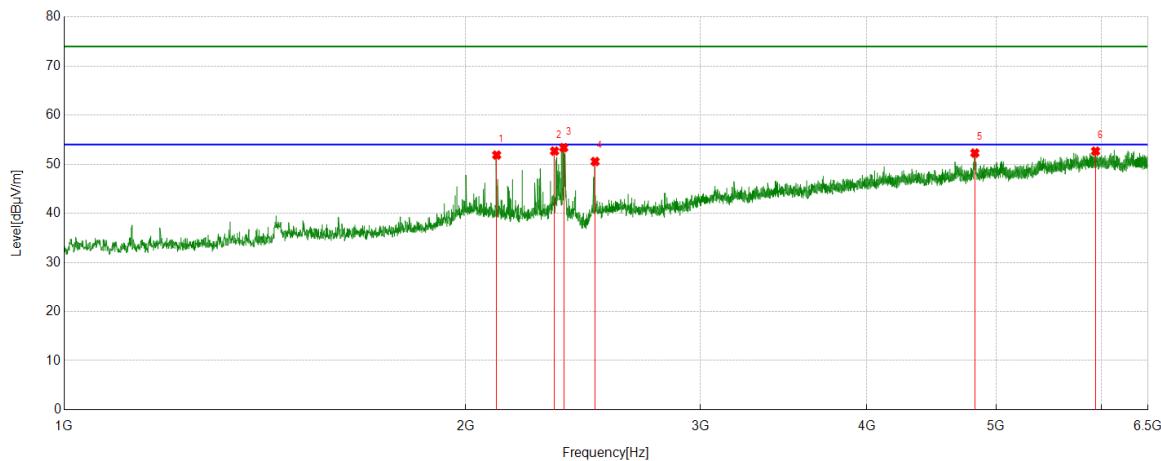

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1280.5312	43.52	-1.87	41.65	74.00	-32.35	Vertical
2	1375.8751	42.11	-1.43	40.68	74.00	-33.32	Vertical
3	3293.7549	36.41	9.75	46.16	74.00	-27.84	Vertical
4	4924.3805	37.16	15.24	52.40	74.00	-21.60	Vertical
5	5687.7431	35.00	17.52	52.52	74.00	-21.48	Vertical
6	6460.2734	34.04	19.07	53.11	74.00	-20.89	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

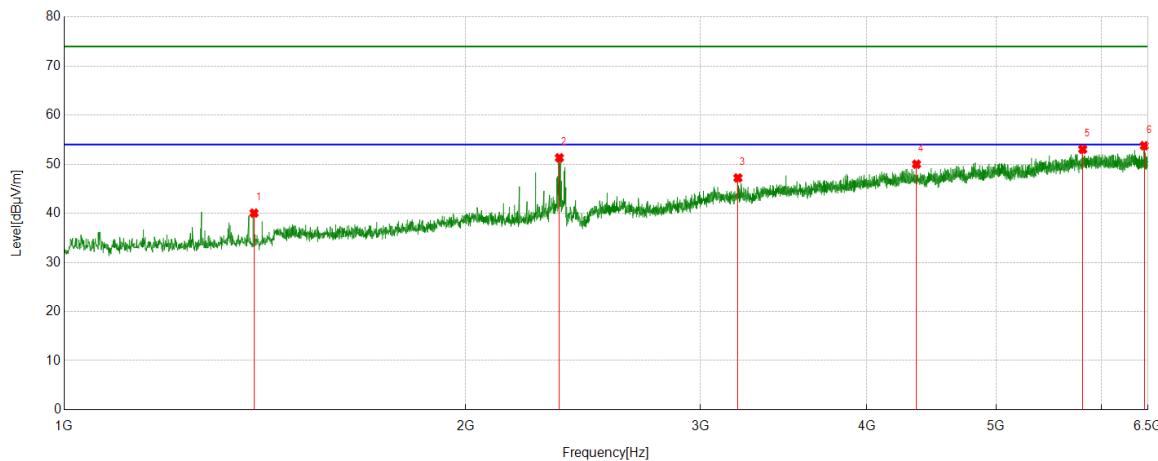

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2110.5123	48.35	3.52	51.87	74.00	-22.13	Horizontal
2	2332.3703	47.73	4.95	52.68	74.00	-21.32	Horizontal
3	2369.6522	48.45	4.93	53.38	74.00	-20.62	Horizontal
4	2501.6669	44.77	5.79	50.56	74.00	-23.44	Horizontal
5	4819.8689	36.59	15.69	52.28	74.00	-21.72	Horizontal
6	5937.1041	34.11	18.55	52.66	74.00	-21.34	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

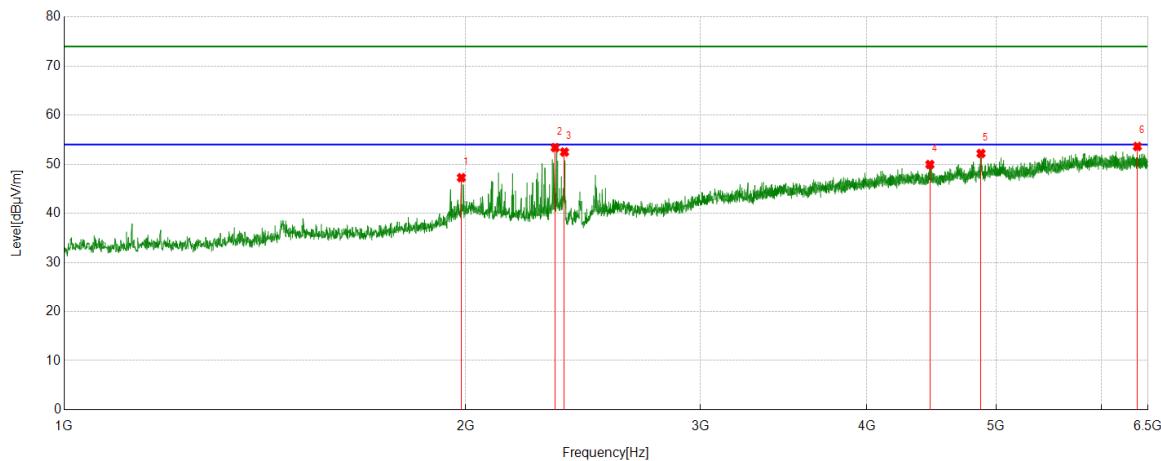

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1388.0987	41.46	-1.41	40.05	74.00	-33.95	Vertical
2	2351.9280	46.53	4.79	51.32	74.00	-22.68	Vertical
3	3201.4668	37.80	9.41	47.21	74.00	-26.79	Vertical
4	4357.8175	36.45	13.55	50.00	74.00	-24.00	Vertical
5	5806.3118	34.73	18.32	53.05	74.00	-20.95	Vertical
6	6457.8286	34.69	19.08	53.77	74.00	-20.23	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

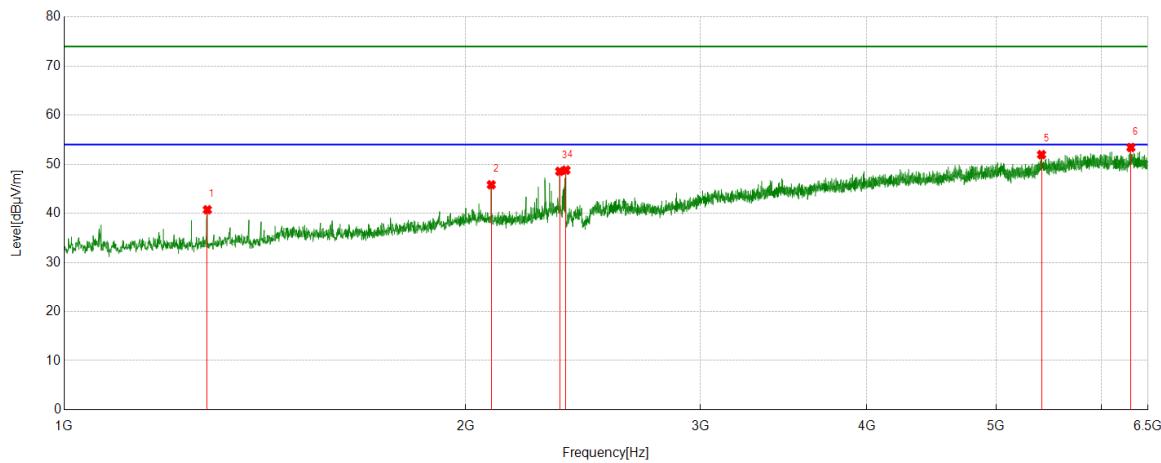

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1985.8318	43.94	3.32	47.26	74.00	-26.74	Horizontal
2	2334.8150	48.43	4.96	53.39	74.00	-20.61	Horizontal
3	2372.7081	47.53	4.95	52.48	74.00	-21.52	Horizontal
4	4459.8844	35.56	14.39	49.95	74.00	-24.05	Horizontal
5	4871.2079	37.46	14.73	52.19	74.00	-21.81	Horizontal
6	6381.4313	34.21	19.41	53.62	74.00	-20.38	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

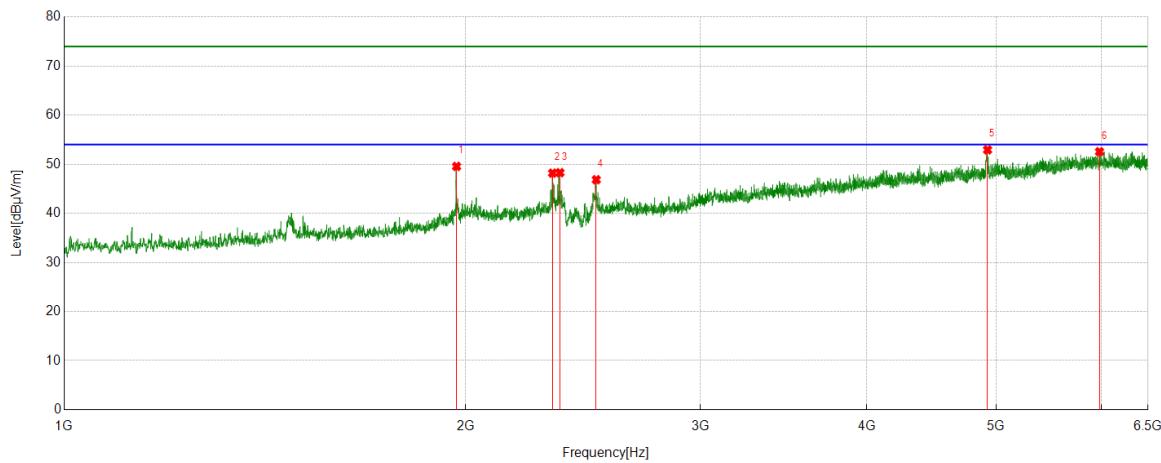

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1280.5312	42.60	-1.87	40.73	74.00	-33.27	Vertical
2	2090.9546	41.92	3.90	45.82	74.00	-28.18	Vertical
3	2353.1504	43.77	4.79	48.56	74.00	-25.44	Vertical
4	2378.8199	43.79	5.01	48.80	74.00	-25.20	Vertical
5	5407.8231	35.01	16.95	51.96	74.00	-22.04	Vertical
6	6310.5345	34.39	19.03	53.42	74.00	-20.58	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

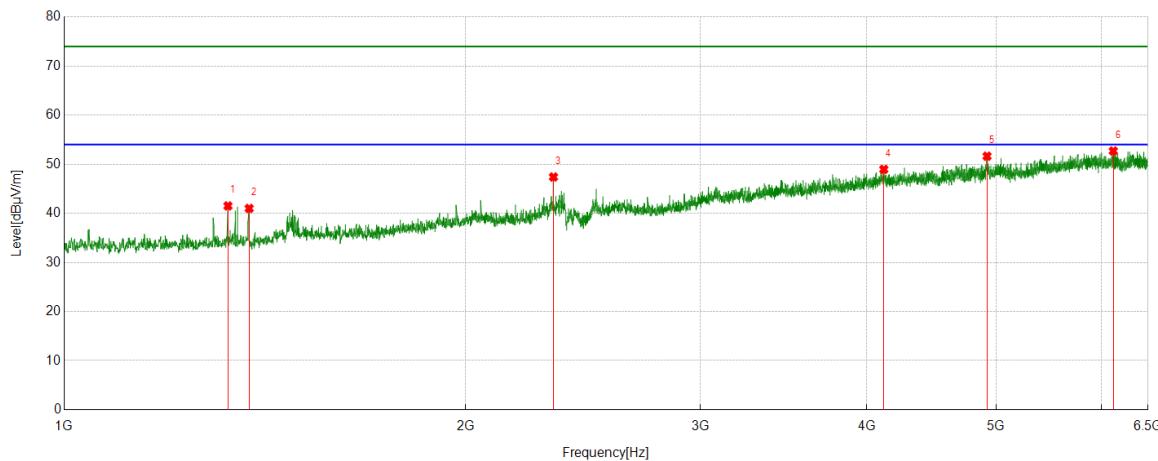
Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1969.3299	46.25	3.31	49.56	74.00	-24.44	Horizontal
2	2324.4249	43.37	4.82	48.19	74.00	-25.81	Horizontal
3	2354.3727	43.48	4.80	48.28	74.00	-25.72	Horizontal
4	2506.5563	41.02	5.83	46.85	74.00	-27.15	Horizontal
5	4926.8252	37.69	15.24	52.93	74.00	-21.07	Horizontal
6	5977.4419	34.18	18.38	52.56	74.00	-21.44	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

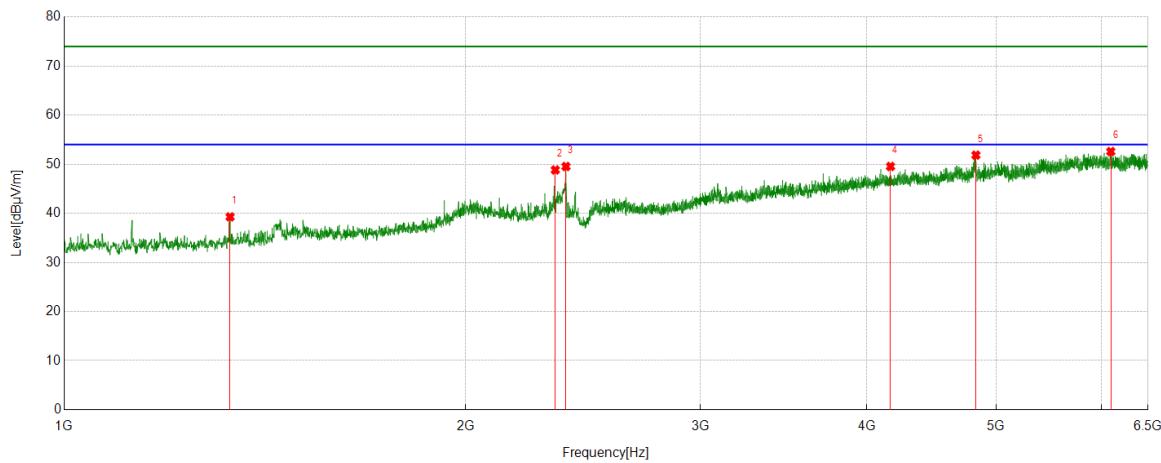

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1326.9808	42.92	-1.41	41.51	74.00	-32.49	Vertical
2	1376.4863	42.43	-1.43	41.00	74.00	-33.00	Vertical
3	2328.0920	42.49	4.91	47.40	74.00	-26.60	Vertical
4	4118.8465	35.02	13.93	48.95	74.00	-25.05	Vertical
5	4922.5470	36.41	15.23	51.64	74.00	-22.36	Vertical
6	6121.6802	34.25	18.45	52.70	74.00	-21.30	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

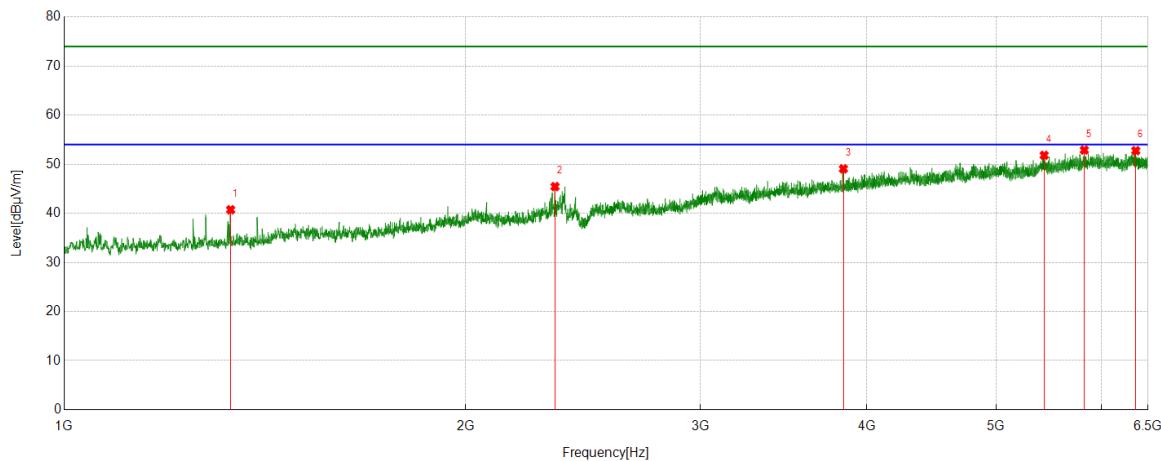
Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV} /m]	[dB _{BuV} /m]	[dB]	
1	1331.8702	40.62	-1.34	39.28	74.00	-34.72	Horizontal
2	2335.4262	43.89	4.95	48.84	74.00	-25.16	Horizontal
3	2378.8199	44.53	5.01	49.54	74.00	-24.46	Horizontal
4	4166.5185	36.46	13.09	49.55	74.00	-24.45	Horizontal
5	4828.4254	36.70	15.16	51.86	74.00	-22.14	Horizontal
6	6094.7883	34.22	18.37	52.59	74.00	-21.41	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

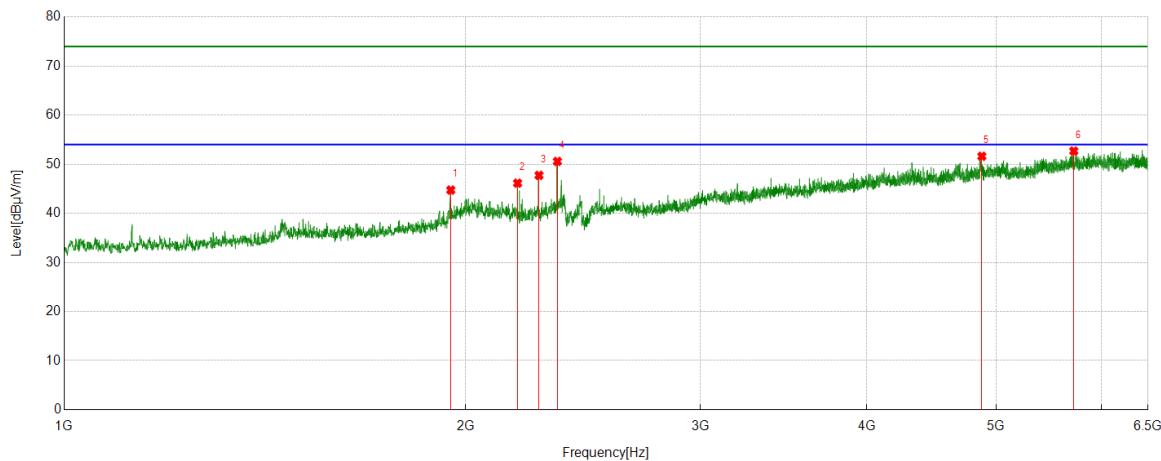

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1333.0926	42.08	-1.35	40.73	74.00	-33.27	Vertical
2	2334.2038	40.49	4.96	45.45	74.00	-28.55	Vertical
3	3840.7601	37.28	11.79	49.07	74.00	-24.93	Vertical
4	5432.8814	34.32	17.50	51.82	74.00	-22.18	Vertical
5	5822.8136	33.91	18.98	52.89	74.00	-21.11	Vertical
6	6363.7071	33.35	19.41	52.76	74.00	-21.24	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

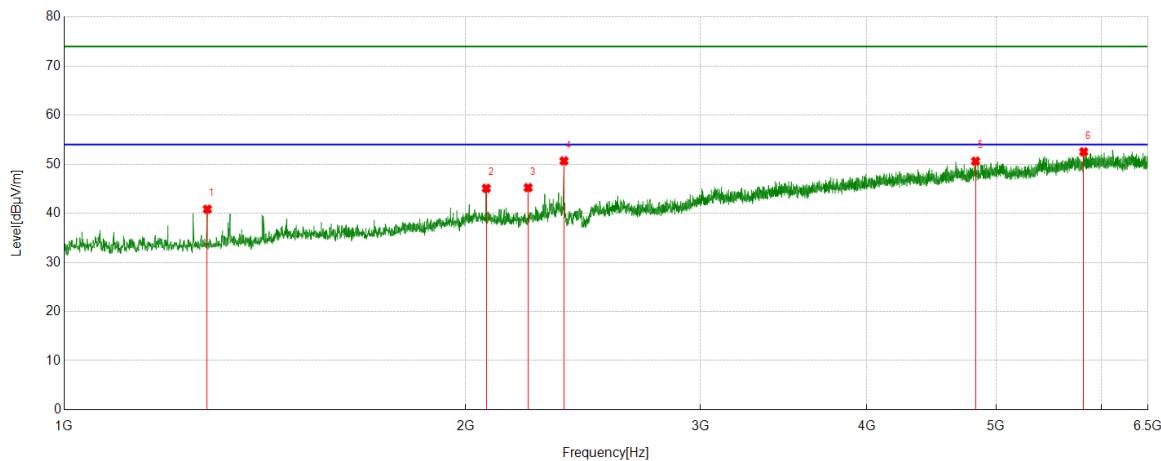
Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1949.7722	41.55	3.19	44.74	74.00	-29.26	Horizontal
2	2188.1320	42.31	3.84	46.15	74.00	-27.85	Horizontal
3	2270.6412	43.80	3.94	47.74	74.00	-26.26	Horizontal
4	2343.9827	45.71	4.87	50.58	74.00	-23.42	Horizontal
5	4878.5421	36.75	14.87	51.62	74.00	-22.38	Horizontal
6	5717.6909	34.87	17.82	52.69	74.00	-21.31	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

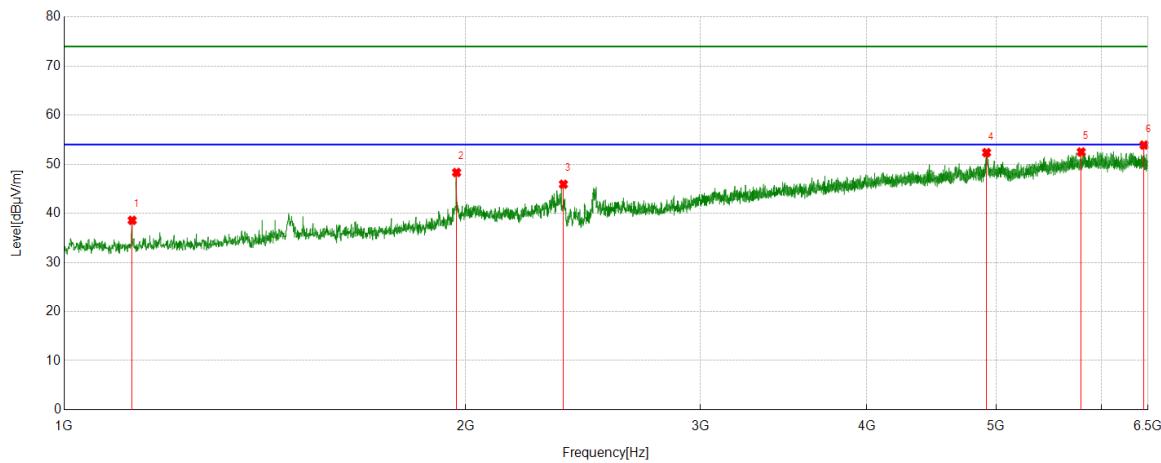
Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV} /m]	[dB _{BuV} /m]	[dB]	
1	1280.5312	42.71	-1.87	40.84	74.00	-33.16	Vertical
2	2073.2304	40.95	4.14	45.09	74.00	-28.91	Vertical
3	2228.4698	41.31	3.92	45.23	74.00	-28.77	Vertical
4	2370.8745	45.75	4.93	50.68	74.00	-23.32	Vertical
5	4825.9807	35.30	15.32	50.62	74.00	-23.38	Vertical
6	5816.7019	33.73	18.80	52.53	74.00	-21.47	Vertical

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

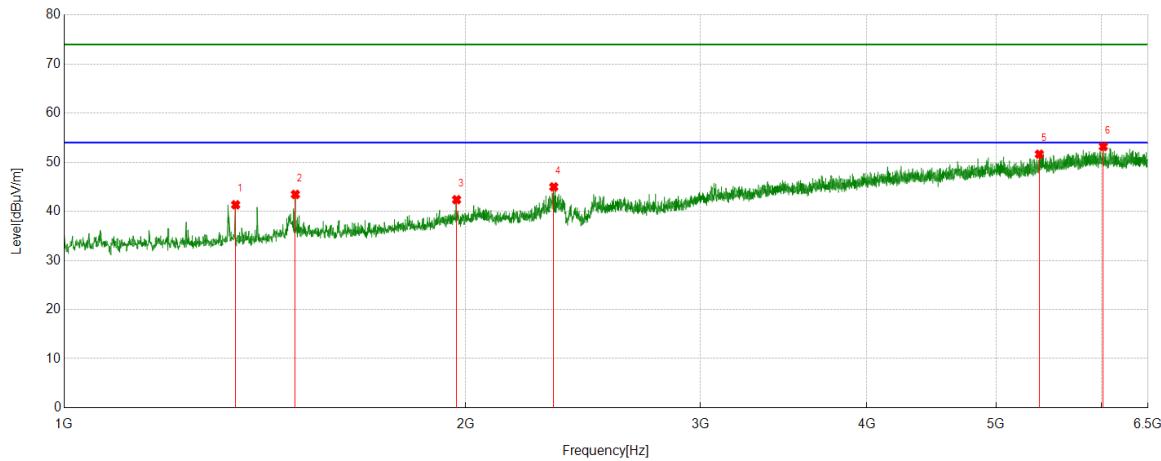
Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	1124.6805	40.64	-2.07	38.57	74.00	-35.43	Horizontal
2	1969.3299	45.01	3.31	48.32	74.00	-25.68	Horizontal
3	2368.4298	41.01	4.91	45.92	74.00	-28.08	Horizontal
4	4918.2687	37.18	15.19	52.37	74.00	-21.63	Horizontal
5	5791.6435	34.29	18.21	52.50	74.00	-21.50	Horizontal
6	6454.7728	34.82	19.08	53.90	74.00	-20.10	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

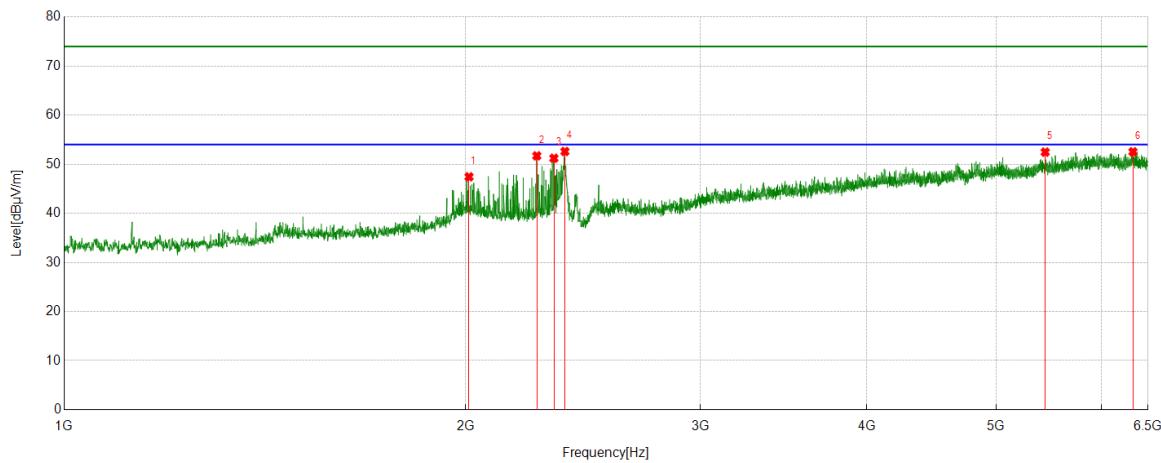

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1344.7050	42.59	-1.26	41.33	74.00	-32.67	Vertical
2	1490.7768	43.43	0.02	43.45	74.00	-30.55	Vertical
3	1969.3299	39.06	3.31	42.37	74.00	-31.63	Vertical
4	2329.3144	40.03	4.95	44.98	74.00	-29.02	Vertical
5	5387.6542	35.08	16.56	51.64	74.00	-22.36	Vertical
6	6017.1686	35.02	18.18	53.20	74.00	-20.80	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

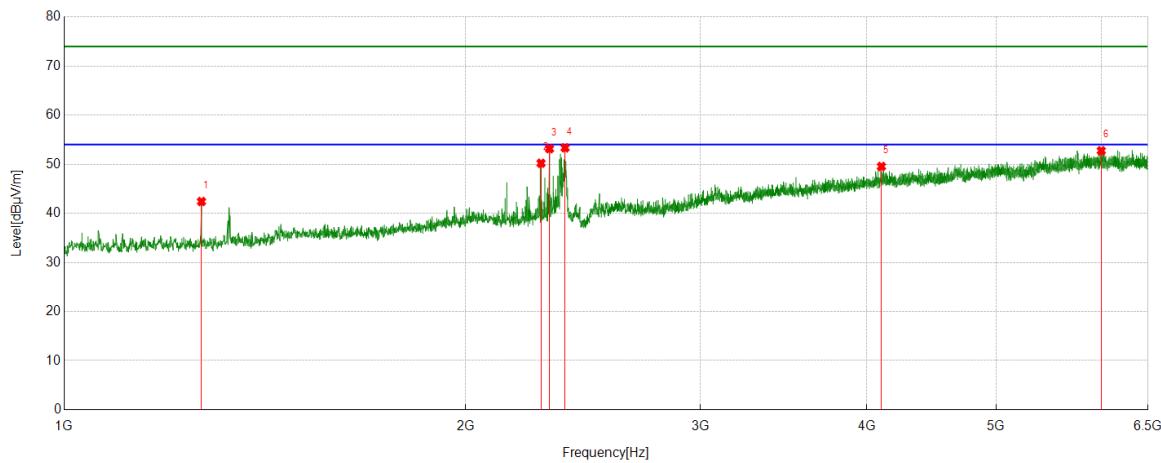

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2012.1125	43.44	4.00	47.44	74.00	-26.56	Horizontal
2	2262.0847	47.97	3.74	51.71	74.00	-22.29	Horizontal
3	2329.9255	46.26	4.96	51.22	74.00	-22.78	Horizontal
4	2374.5416	47.63	4.97	52.60	74.00	-21.40	Horizontal
5	5442.6603	35.09	17.38	52.47	74.00	-21.53	Horizontal
6	6333.1481	33.18	19.36	52.54	74.00	-21.46	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

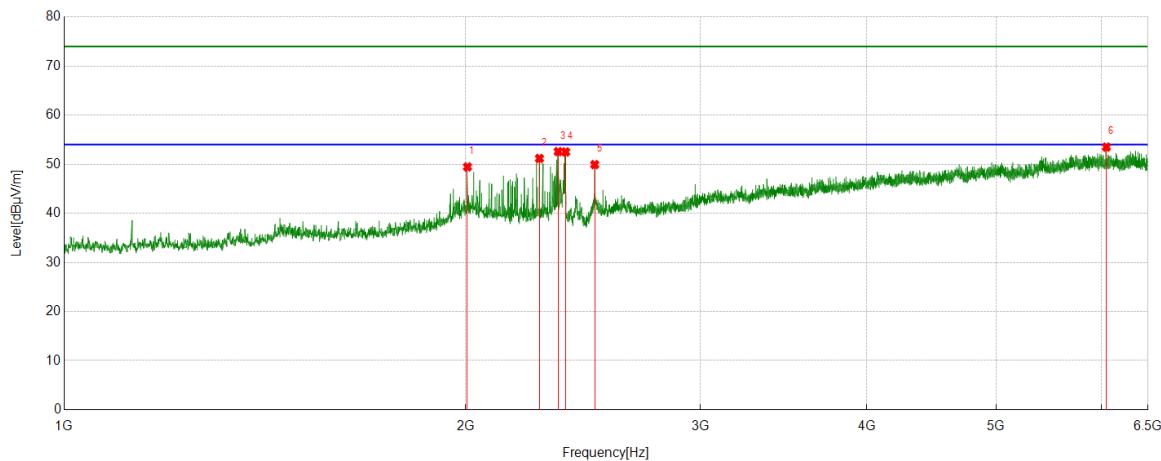

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1267.6964	44.23	-1.82	42.41	74.00	-31.59	Vertical
2	2278.5865	46.46	3.75	50.21	74.00	-23.79	Vertical
3	2312.2014	48.92	4.24	53.16	74.00	-20.84	Vertical
4	2375.1528	48.36	4.98	53.34	74.00	-20.66	Vertical
5	4101.7335	35.64	13.91	49.55	74.00	-24.45	Vertical
6	5995.7773	34.40	18.36	52.76	74.00	-21.24	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

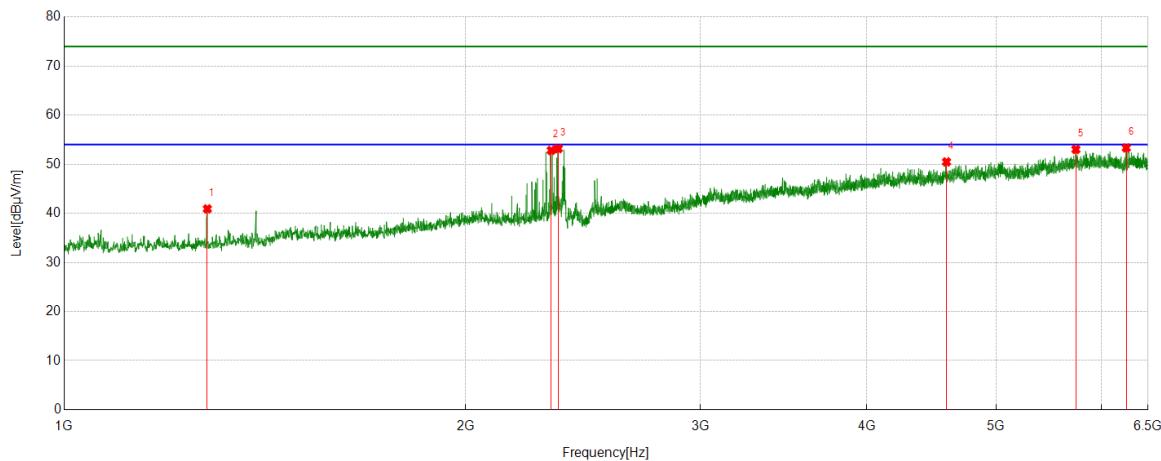

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2006.6118	45.67	3.79	49.46	74.00	-24.54	Horizontal
2	2272.4747	47.28	3.90	51.18	74.00	-22.82	Horizontal
3	2347.0386	47.76	4.82	52.58	74.00	-21.42	Horizontal
4	2377.5975	47.51	5.00	52.51	74.00	-21.49	Horizontal
5	2499.8333	44.15	5.78	49.93	74.00	-24.07	Horizontal
6	6048.9499	35.12	18.37	53.49	74.00	-20.51	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

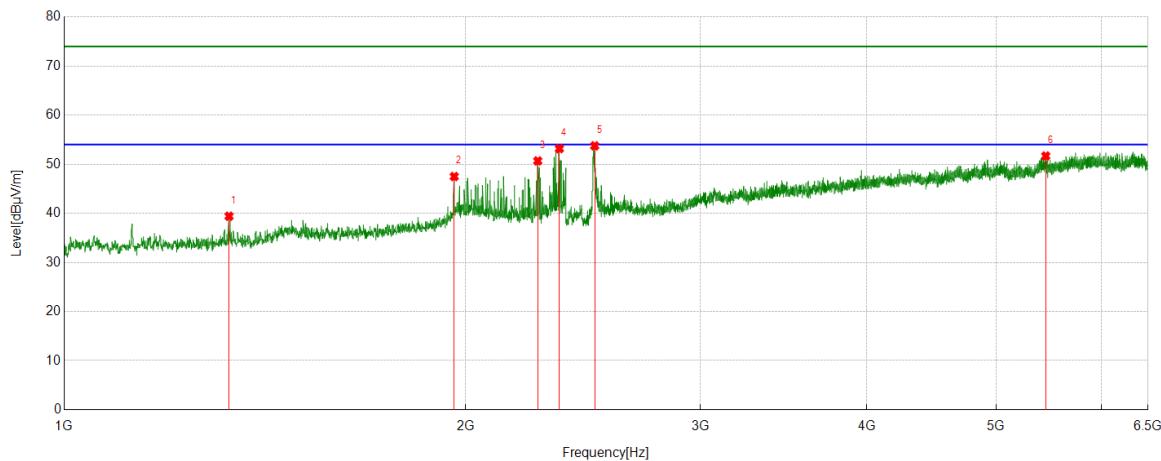

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1280.5312	42.78	-1.87	40.91	74.00	-33.09	Vertical
2	2318.9243	48.19	4.63	52.82	74.00	-21.18	Vertical
3	2347.6497	48.37	4.82	53.19	74.00	-20.81	Vertical
4	4589.4544	36.35	14.13	50.48	74.00	-23.52	Vertical
5	5738.4709	35.05	17.97	53.02	74.00	-20.98	Vertical
6	6260.4178	34.80	18.53	53.33	74.00	-20.67	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

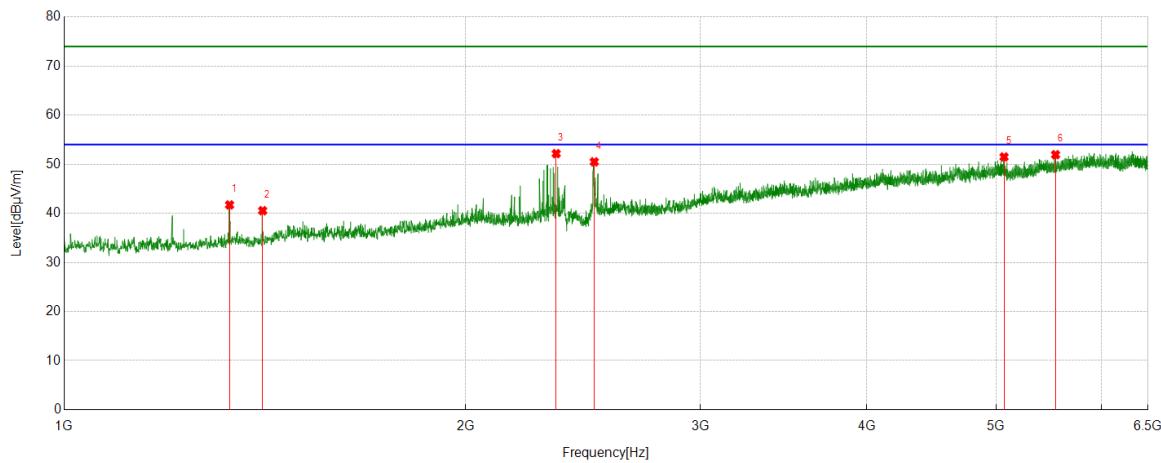
Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1329.4255	40.76	-1.35	39.41	74.00	-34.59	Horizontal
2	1961.3846	44.17	3.33	47.50	74.00	-26.50	Horizontal
3	2265.7518	46.84	3.84	50.68	74.00	-23.32	Horizontal
4	2351.9280	48.40	4.79	53.19	74.00	-20.81	Horizontal
5	2499.8333	47.97	5.78	53.75	74.00	-20.25	Horizontal
6	5447.5497	34.13	17.55	51.68	74.00	-22.32	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

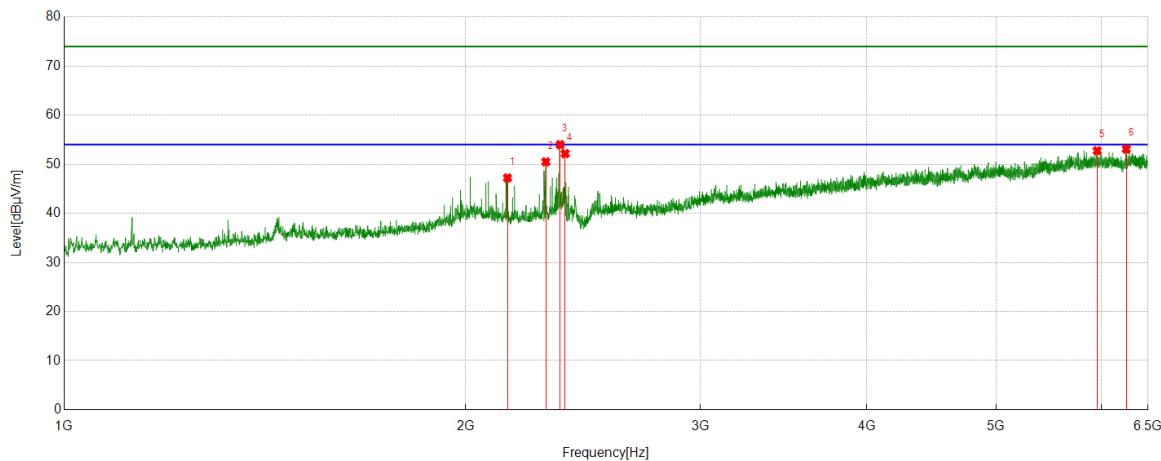

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1330.6478	43.05	-1.33	41.72	74.00	-32.28	Vertical
2	1408.8788	41.96	-1.42	40.54	74.00	-33.46	Vertical
3	2339.0932	47.21	4.95	52.16	74.00	-21.84	Vertical
4	2497.9998	44.73	5.76	50.49	74.00	-23.51	Vertical
5	5069.2299	35.28	16.21	51.49	74.00	-22.51	Vertical
6	5540.4489	35.18	16.77	51.95	74.00	-22.05	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

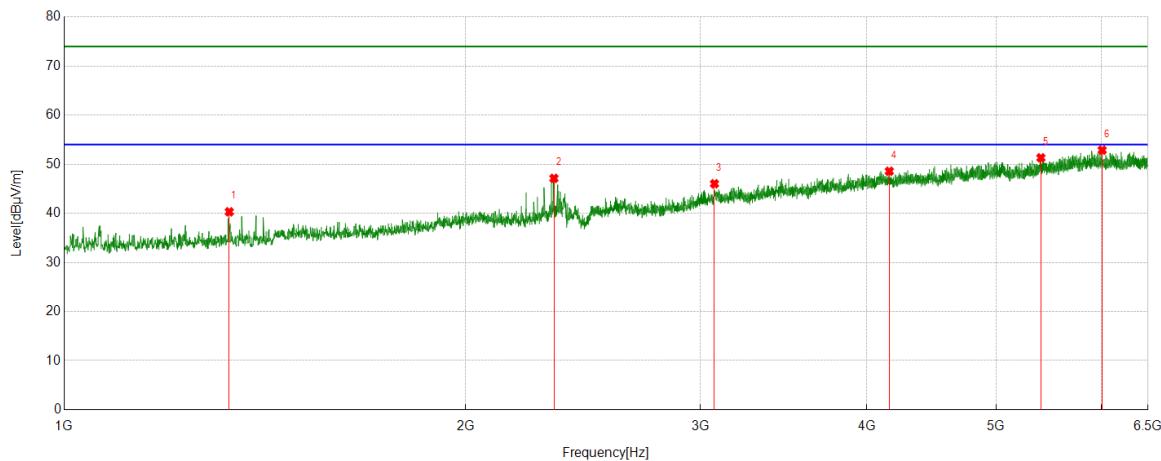
Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2150.2389	43.50	3.71	47.21	74.00	-26.79	Horizontal
2	2297.5331	46.53	3.96	50.49	74.00	-23.51	Horizontal
3	2354.9839	49.19	4.80	53.99	74.00	-20.01	Horizontal
4	2375.7640	47.18	4.98	52.16	74.00	-21.84	Horizontal
5	5952.9948	34.26	18.50	52.76	74.00	-21.24	Horizontal
6	6260.4178	34.58	18.53	53.11	74.00	-20.89	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Vertical	PASS

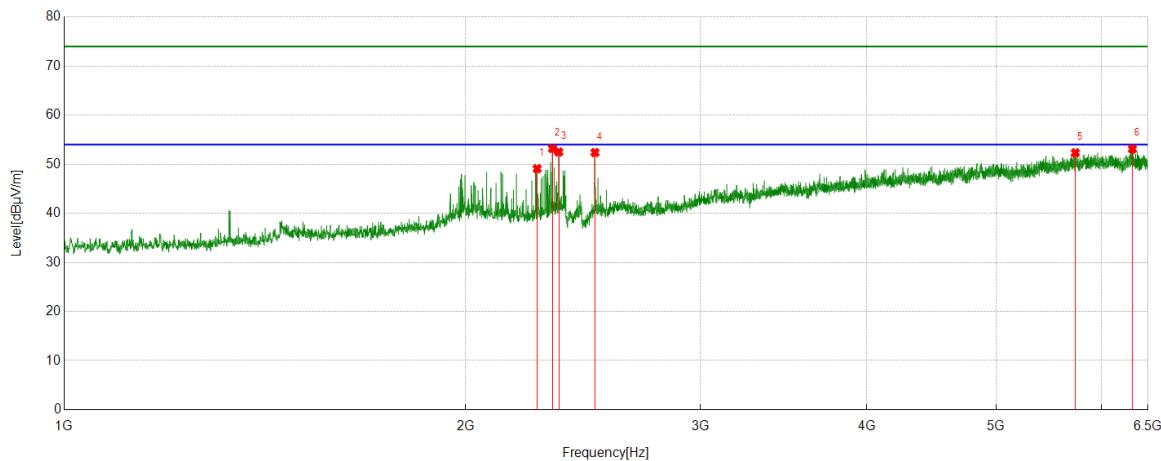

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1330.0367	41.64	-1.33	40.31	74.00	-33.69	Vertical
2	2329.9255	42.17	4.96	47.13	74.00	-26.87	Vertical
3	3074.3416	36.56	9.47	46.03	74.00	-27.97	Vertical
4	4157.9620	35.28	13.30	48.58	74.00	-25.42	Vertical
5	5402.3225	34.40	16.91	51.31	74.00	-22.69	Vertical
6	6004.9450	34.55	18.32	52.87	74.00	-21.13	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

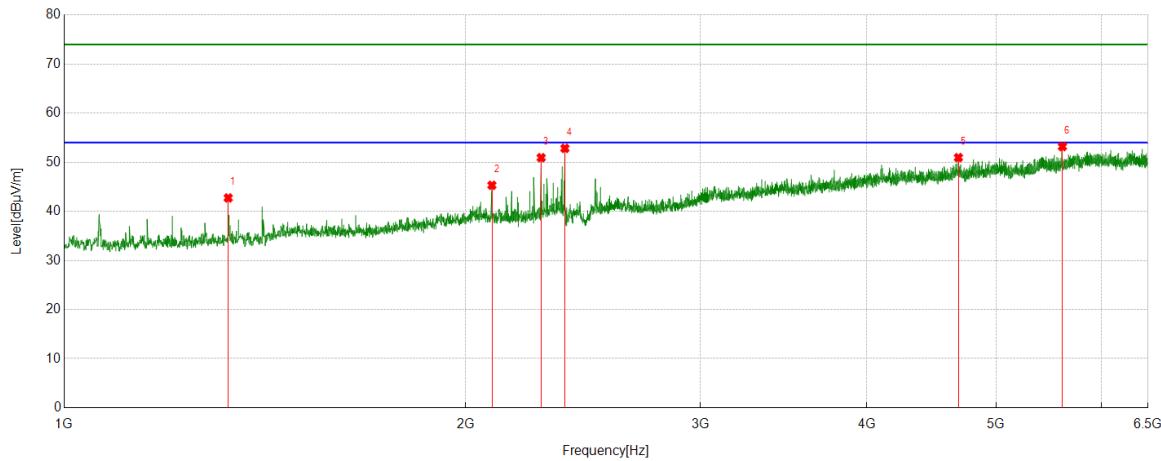
Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV} /m]	[dB _{BuV} /m]	[dB]	
1	2263.3070	45.32	3.77	49.09	74.00	-24.91	Horizontal
2	2323.8138	48.40	4.80	53.20	74.00	-20.80	Horizontal
3	2349.4833	47.72	4.78	52.50	74.00	-21.50	Horizontal
4	2501.0557	46.59	5.79	52.38	74.00	-21.62	Horizontal
5	5733.5815	34.62	17.71	52.33	74.00	-21.67	Horizontal
6	6327.0363	33.77	19.34	53.11	74.00	-20.89	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Vertical	PASS

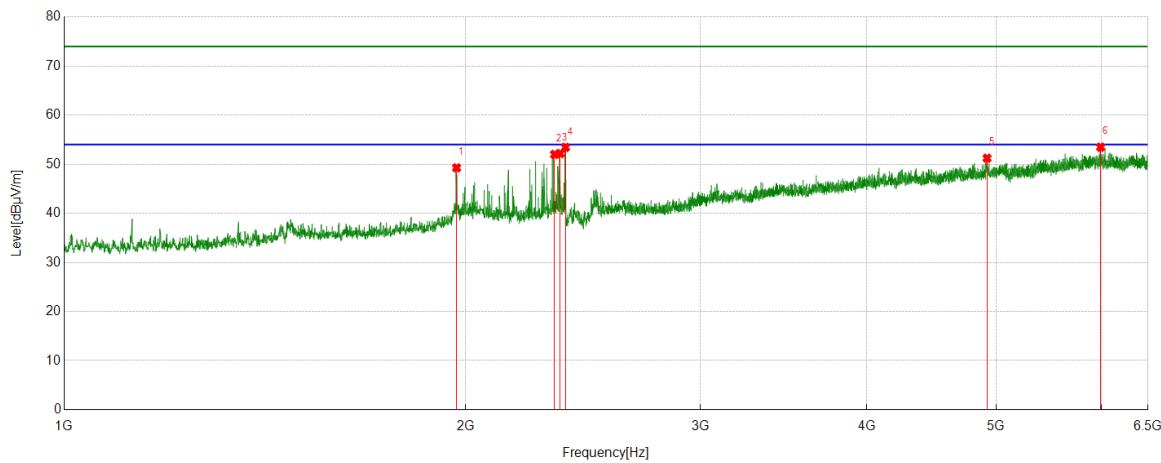

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	1327.5920	44.12	-1.39	42.73	74.00	-31.27	Vertical
2	2093.3993	41.50	3.81	45.31	74.00	-28.69	Vertical
3	2279.1977	47.19	3.74	50.93	74.00	-23.07	Vertical
4	2374.5416	47.86	4.97	52.83	74.00	-21.17	Vertical
5	4684.7983	35.42	15.53	50.95	74.00	-23.05	Vertical
6	5606.4563	35.90	17.30	53.20	74.00	-20.80	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Horizontal	PASS

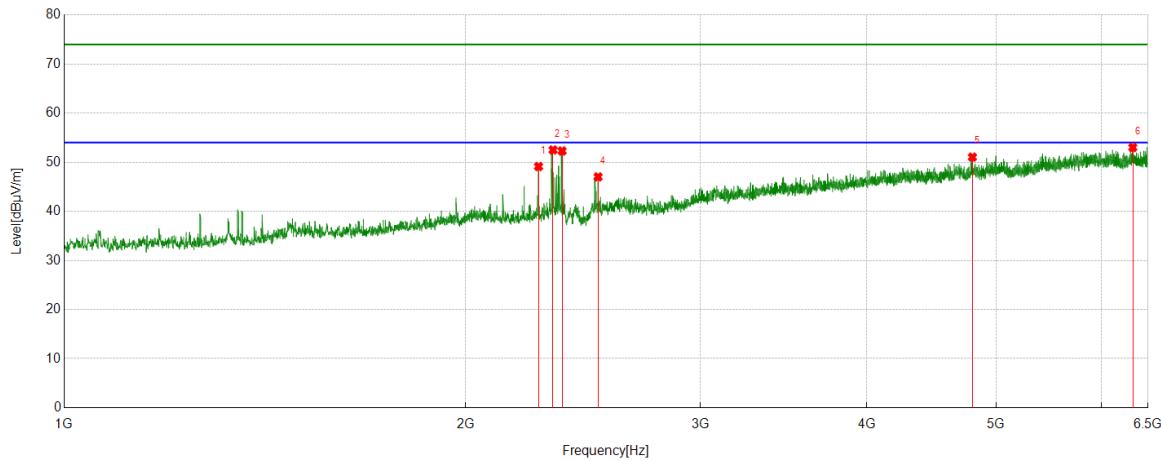

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	1969.3299	45.96	3.31	49.27	74.00	-24.73	Horizontal
2	2332.3703	47.06	4.95	52.01	74.00	-21.99	Horizontal
3	2355.5951	47.38	4.81	52.19	74.00	-21.81	Horizontal
4	2376.9863	48.45	4.99	53.44	74.00	-20.56	Horizontal
5	4922.5470	36.00	15.23	51.23	74.00	-22.77	Horizontal
6	5989.0543	35.07	18.41	53.48	74.00	-20.52	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Vertical	PASS

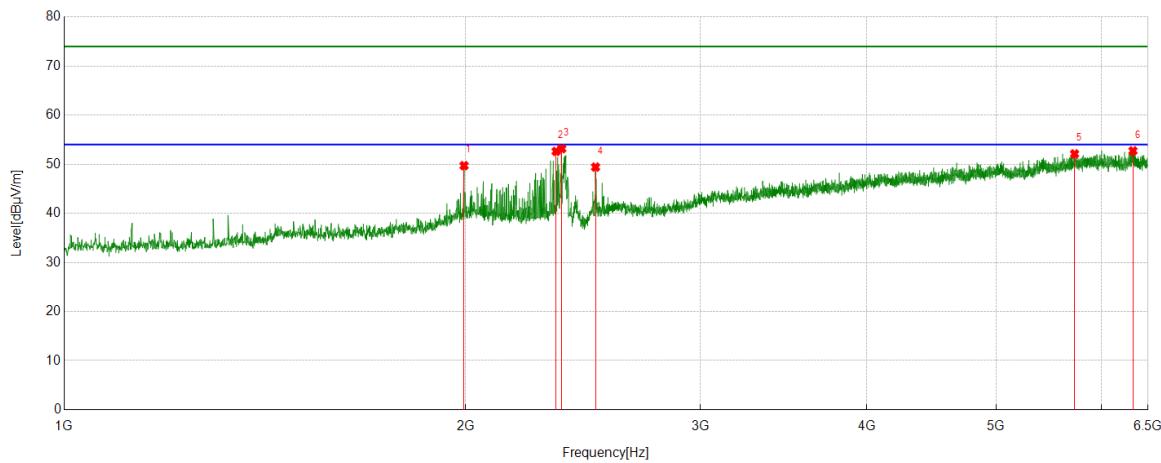

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2268.8076	45.21	3.92	49.13	74.00	-24.87	Vertical
2	2326.2585	47.63	4.87	52.50	74.00	-21.50	Vertical
3	2362.9292	47.44	4.86	52.30	74.00	-21.70	Vertical
4	2514.5016	41.24	5.78	47.02	74.00	-26.98	Vertical
5	4799.7000	35.64	15.41	51.05	74.00	-22.95	Vertical
6	6331.3146	33.61	19.40	53.01	74.00	-20.99	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

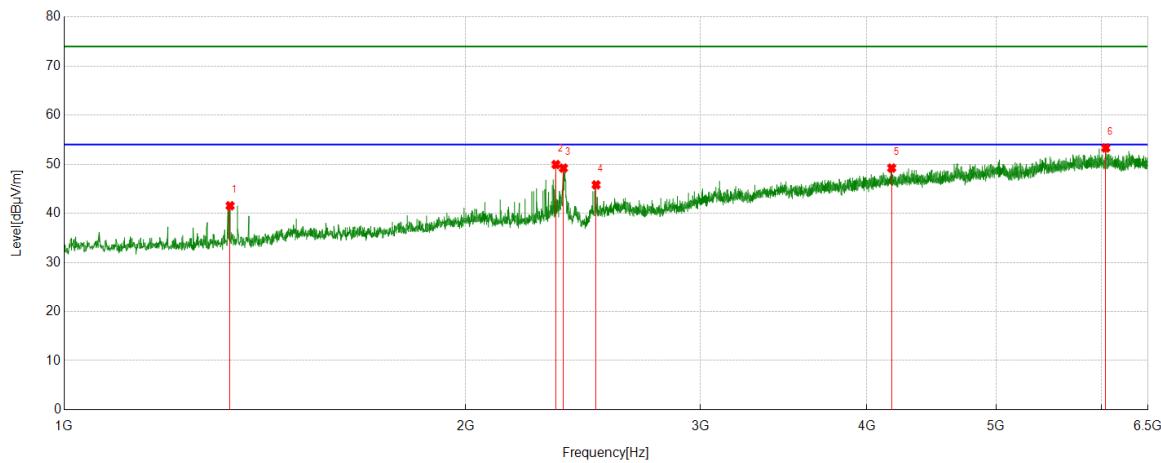
Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1994.9994	46.32	3.39	49.71	74.00	-24.29	Horizontal
2	2338.4821	47.67	4.95	52.62	74.00	-21.38	Horizontal
3	2361.7069	48.31	4.86	53.17	74.00	-20.83	Horizontal
4	2503.5004	43.62	5.80	49.42	74.00	-24.58	Horizontal
5	5725.6362	34.44	17.67	52.11	74.00	-21.89	Horizontal
6	6333.1481	33.37	19.36	52.73	74.00	-21.27	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Vertical	PASS

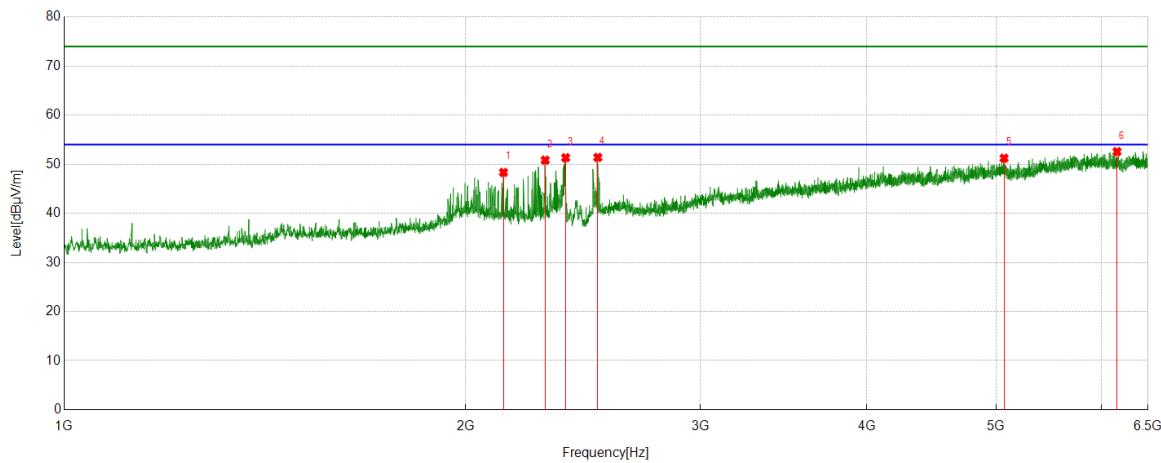

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	1331.8702	42.88	-1.34	41.54	74.00	-32.46	Vertical
2	2337.8709	44.99	4.95	49.94	74.00	-24.06	Vertical
3	2368.4298	44.30	4.91	49.21	74.00	-24.79	Vertical
4	2505.9451	39.97	5.83	45.80	74.00	-28.20	Vertical
5	4175.0750	36.30	12.93	49.23	74.00	-24.77	Vertical
6	6042.8381	35.10	18.22	53.32	74.00	-20.68	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Horizontal	PASS

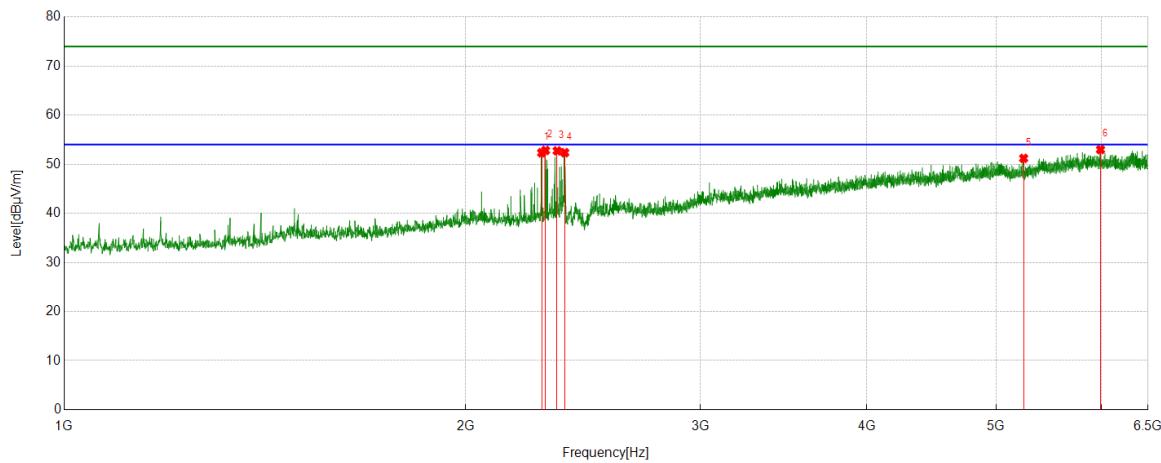

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2135.5706	44.65	3.68	48.33	74.00	-25.67	Horizontal
2	2295.0883	46.80	4.03	50.83	74.00	-23.17	Horizontal
3	2377.5975	46.33	5.00	51.33	74.00	-22.67	Horizontal
4	2513.2793	45.60	5.79	51.39	74.00	-22.61	Horizontal
5	5069.2299	35.02	16.21	51.23	74.00	-22.77	Horizontal
6	6161.4068	33.76	18.81	52.57	74.00	-21.43	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Vertical	PASS

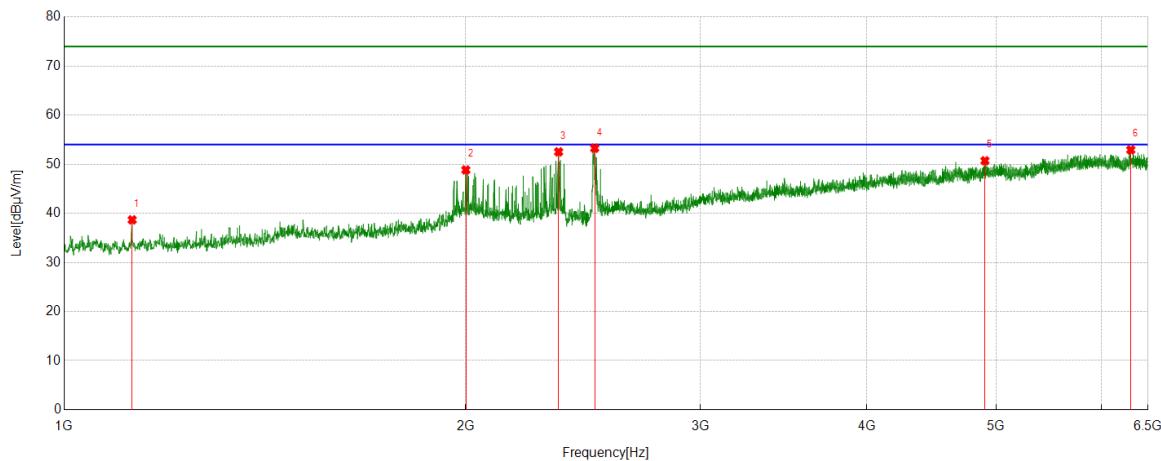

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2281.0312	48.57	3.77	52.34	74.00	-21.66	Vertical
2	2296.3107	48.82	4.00	52.82	74.00	-21.18	Vertical
3	2342.7603	47.83	4.90	52.73	74.00	-21.27	Vertical
4	2373.9304	47.39	4.97	52.36	74.00	-21.64	Vertical
5	5243.4159	35.54	15.67	51.21	74.00	-22.79	Vertical
6	5987.8320	34.56	18.42	52.98	74.00	-21.02	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Horizontal	PASS

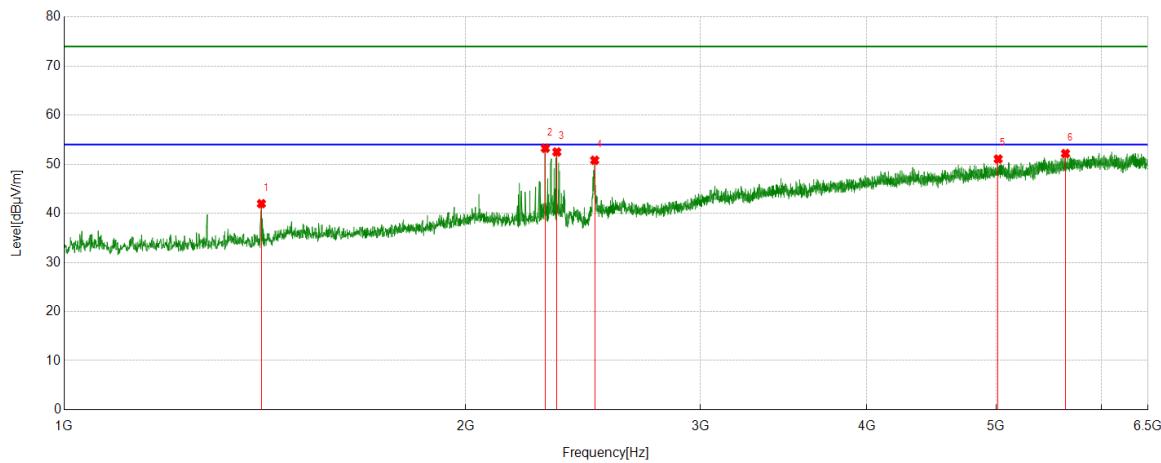

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1124.6805	40.74	-2.07	38.67	74.00	-35.33	Horizontal
2	2001.1112	45.33	3.51	48.84	74.00	-25.16	Horizontal
3	2348.8721	47.73	4.79	52.52	74.00	-21.48	Horizontal
4	2499.8333	47.49	5.78	53.27	74.00	-20.73	Horizontal
5	4904.8228	35.67	15.04	50.71	74.00	-23.29	Horizontal
6	6309.3121	33.90	19.03	52.93	74.00	-21.07	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Vertical	PASS


PK Result:

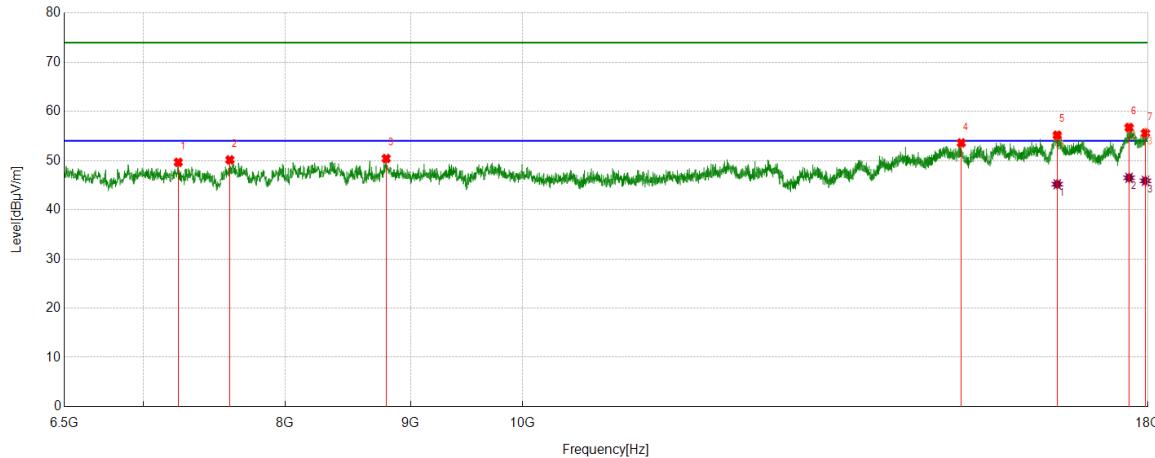
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1405.8229	43.42	-1.45	41.97	74.00	-32.03	Vertical
2	2295.6995	49.25	4.01	53.26	74.00	-20.74	Vertical
3	2341.5379	47.58	4.92	52.50	74.00	-21.50	Vertical
4	2499.8333	45.03	5.78	50.81	74.00	-23.19	Vertical
5	5017.8909	35.49	15.57	51.06	74.00	-22.94	Vertical
6	5636.4040	34.70	17.48	52.18	74.00	-21.82	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 2: 6.5GHz~18GHz
HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS


PK Result:

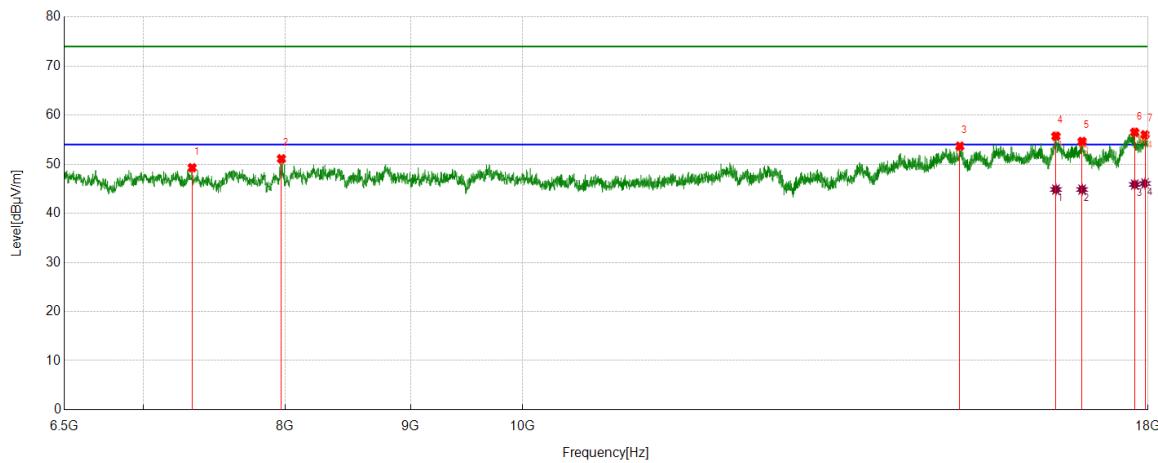
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7236.0920	45.51	4.14	49.65	74.00	-24.35	Horizontal
2	7595.5119	45.07	5.08	50.15	74.00	-23.85	Horizontal
3	8797.4122	44.11	6.31	50.42	74.00	-23.58	Horizontal
4	15103.0754	40.43	13.17	53.60	74.00	-20.40	Horizontal
5	16527.8160	38.72	16.45	55.17	74.00	-18.83	Horizontal
6	17682.2728	37.70	19.03	56.73	74.00	-17.27	Horizontal
7	17956.8696	35.07	20.52	55.59	74.00	-18.41	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16527.8160	28.74	16.45	45.19	54.00	-8.81	Horizontal
2	17682.2728	27.47	19.03	46.50	54.00	-7.50	Horizontal
3	17956.8696	25.36	20.52	45.88	54.00	-8.12	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7330.9789	45.29	4.00	49.29	74.00	-24.71	Vertical
2	7972.1840	45.69	5.42	51.11	74.00	-22.89	Vertical
3	15082.9479	40.55	13.13	53.68	74.00	-20.32	Vertical
4	16507.6885	39.03	16.69	55.72	74.00	-18.28	Vertical
5	16918.8649	37.86	16.78	54.64	74.00	-19.36	Vertical
6	17775.7220	36.89	19.63	56.52	74.00	-17.48	Vertical
7	17949.6812	35.57	20.44	56.01	74.00	-17.99	Vertical

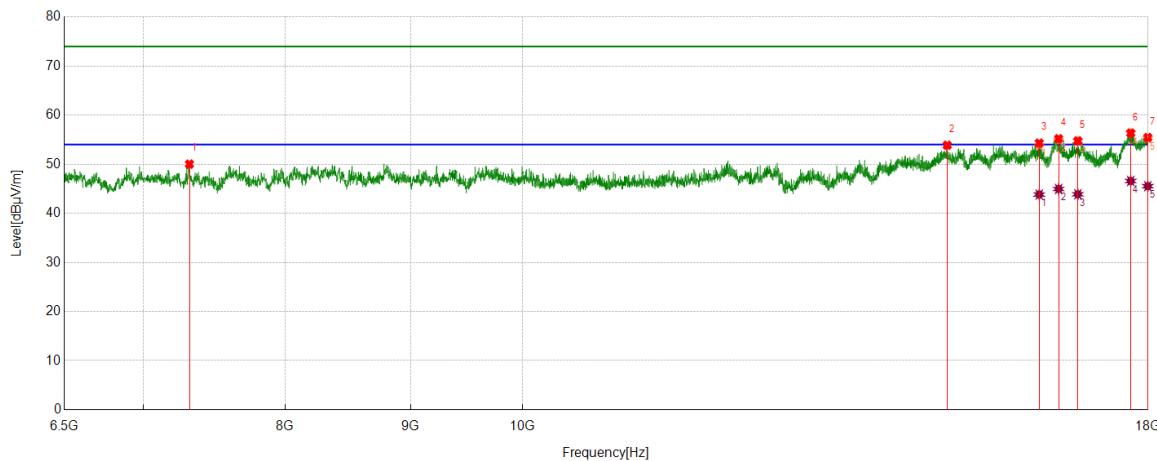
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16507.6885	28.16	16.69	44.85	54.00	-9.15	Vertical
2	16918.8649	28.07	16.78	44.85	54.00	-9.15	Vertical
3	17775.7220	26.24	19.63	45.87	54.00	-8.13	Vertical
4	17949.6812	25.64	20.44	46.08	54.00	-7.92	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS


PK Result:

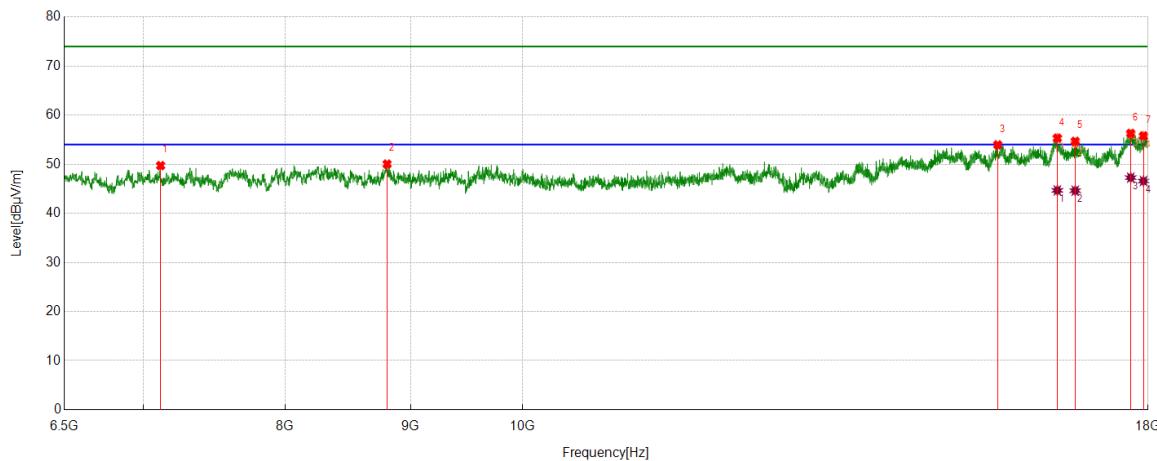
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7312.2890	46.01	4.02	50.03	74.00	-23.97	Horizontal
2	14904.6756	41.15	12.73	53.88	74.00	-20.12	Horizontal
3	16250.3438	38.43	15.88	54.31	74.00	-19.69	Horizontal
4	16549.3812	38.65	16.55	55.20	74.00	-18.80	Horizontal
5	16851.2939	37.93	16.83	54.76	74.00	-19.24	Horizontal
6	17709.5887	36.99	19.36	56.35	74.00	-17.65	Horizontal
7	17995.6870	34.86	20.58	55.44	74.00	-18.56	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16250.3438	27.95	15.88	43.83	54.00	-10.17	Horizontal
2	16549.3812	28.41	16.55	44.96	54.00	-9.04	Horizontal
3	16851.2939	27.05	16.83	43.88	54.00	-10.12	Horizontal
4	17709.5887	27.23	19.36	46.59	54.00	-7.41	Horizontal
5	17995.6870	24.95	20.58	45.53	54.00	-8.47	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7116.7646	45.64	4.08	49.72	74.00	-24.28	Vertical
2	8804.6006	43.69	6.34	50.03	74.00	-23.97	Vertical
3	15629.2662	40.28	13.67	53.95	74.00	-20.05	Vertical
4	16529.2537	38.91	16.41	55.32	74.00	-18.68	Vertical
5	16809.6012	37.69	16.97	54.66	74.00	-19.34	Vertical
6	17709.5887	36.92	19.36	56.28	74.00	-17.72	Vertical
7	17923.8030	35.64	20.13	55.77	74.00	-18.23	Vertical

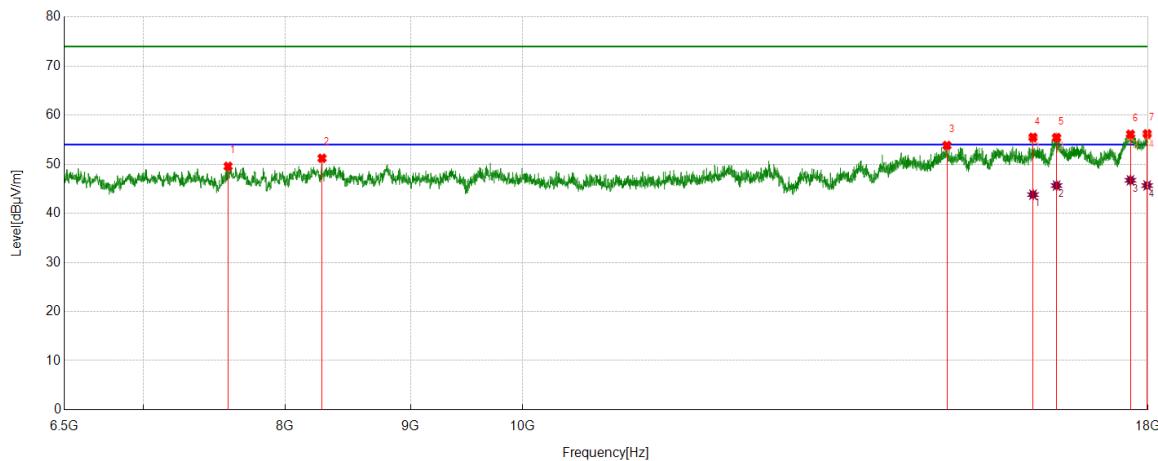
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16529.2537	28.26	16.41	44.67	54.00	-9.33	Vertical
2	16809.6012	27.64	16.97	44.61	54.00	-9.39	Vertical
3	17709.5887	27.91	19.36	47.27	54.00	-6.73	Vertical
4	17923.8030	26.45	20.13	46.58	54.00	-7.42	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7582.5728	44.62	4.95	49.57	74.00	-24.43	Horizontal
2	8282.7228	44.95	6.27	51.22	74.00	-22.78	Horizontal
3	14900.3625	41.10	12.73	53.83	74.00	-20.17	Horizontal
4	16155.4569	40.10	15.39	55.49	74.00	-18.51	Horizontal
5	16517.7522	38.77	16.67	55.44	74.00	-18.56	Horizontal
6	17705.2757	36.79	19.32	56.11	74.00	-17.89	Horizontal
7	17985.6232	35.54	20.65	56.19	74.00	-17.81	Horizontal

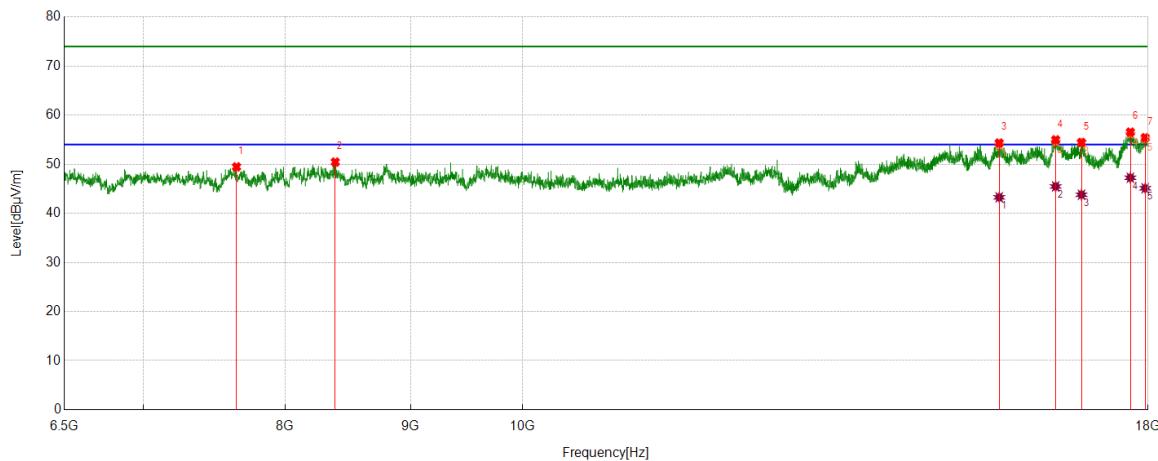
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16155.4569	28.42	15.39	43.81	54.00	-10.19	Horizontal
2	16517.7522	28.99	16.67	45.66	54.00	-8.34	Horizontal
3	17705.2757	27.41	19.32	46.73	54.00	-7.27	Horizontal
4	17985.6232	25.02	20.65	45.67	54.00	-8.33	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7642.9554	44.13	5.34	49.47	74.00	-24.53	Vertical
2	8386.2358	44.18	6.27	50.45	74.00	-23.55	Vertical
3	15650.8314	40.51	13.81	54.32	74.00	-19.68	Vertical
4	16503.3754	38.38	16.59	54.97	74.00	-19.03	Vertical
5	16908.8011	37.83	16.60	54.43	74.00	-19.57	Vertical
6	17703.8380	37.23	19.31	56.54	74.00	-17.46	Vertical
7	17952.5566	34.94	20.47	55.41	74.00	-18.59	Vertical

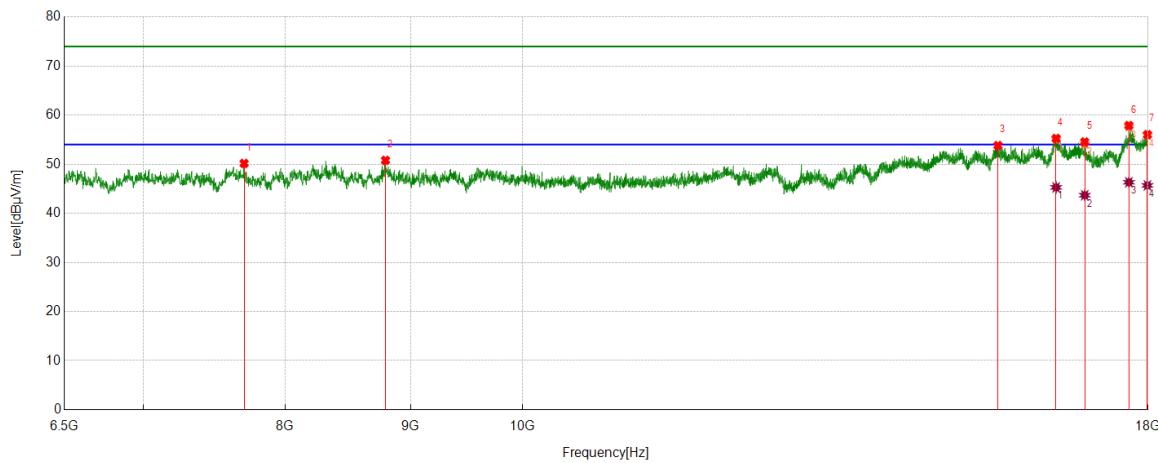
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15650.8314	29.45	13.81	43.26	54.00	-10.74	Vertical
2	16503.3754	28.89	16.59	45.48	54.00	-8.52	Vertical
3	16908.8011	27.19	16.60	43.79	54.00	-10.21	Vertical
4	17703.8380	27.94	19.31	47.25	54.00	-6.75	Vertical
5	17952.5566	24.64	20.47	45.11	54.00	-8.89	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7697.5872	44.57	5.60	50.17	74.00	-23.83	Horizontal
2	8791.6615	44.47	6.32	50.79	74.00	-23.21	Horizontal
3	15632.1415	40.15	13.66	53.81	74.00	-20.19	Horizontal
4	16510.5638	38.52	16.73	55.25	74.00	-18.75	Horizontal
5	16960.5576	37.65	16.89	54.54	74.00	-19.46	Horizontal
6	17679.3974	38.87	19.01	57.88	74.00	-16.12	Horizontal
7	17989.9362	35.39	20.63	56.02	74.00	-17.98	Horizontal

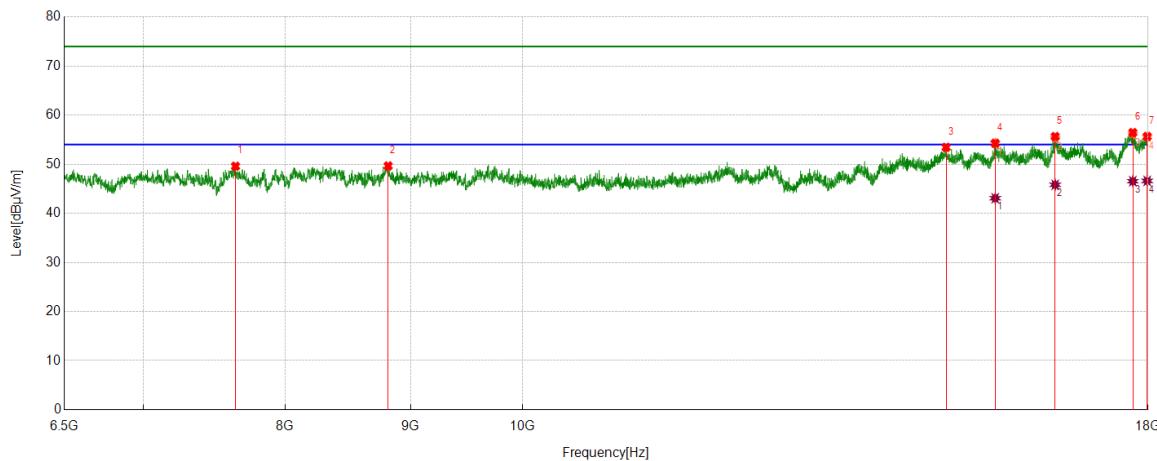
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16510.5638	28.55	16.73	45.28	54.00	-8.72	Horizontal
2	16960.5576	26.80	16.89	43.69	54.00	-10.31	Horizontal
3	17679.3974	27.32	19.01	46.33	54.00	-7.67	Horizontal
4	17989.9362	25.06	20.63	45.69	54.00	-8.31	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7635.7670	44.32	5.27	49.59	74.00	-24.41	Vertical
2	8813.2267	43.29	6.36	49.65	74.00	-24.35	Vertical
3	14888.8611	40.67	12.77	53.44	74.00	-20.56	Vertical
4	15591.8865	40.80	13.48	54.28	74.00	-19.72	Vertical
5	16496.1870	39.07	16.57	55.64	74.00	-18.36	Vertical
6	17744.0930	36.87	19.57	56.44	74.00	-17.56	Vertical
7	17985.6232	35.00	20.65	55.65	74.00	-18.35	Vertical

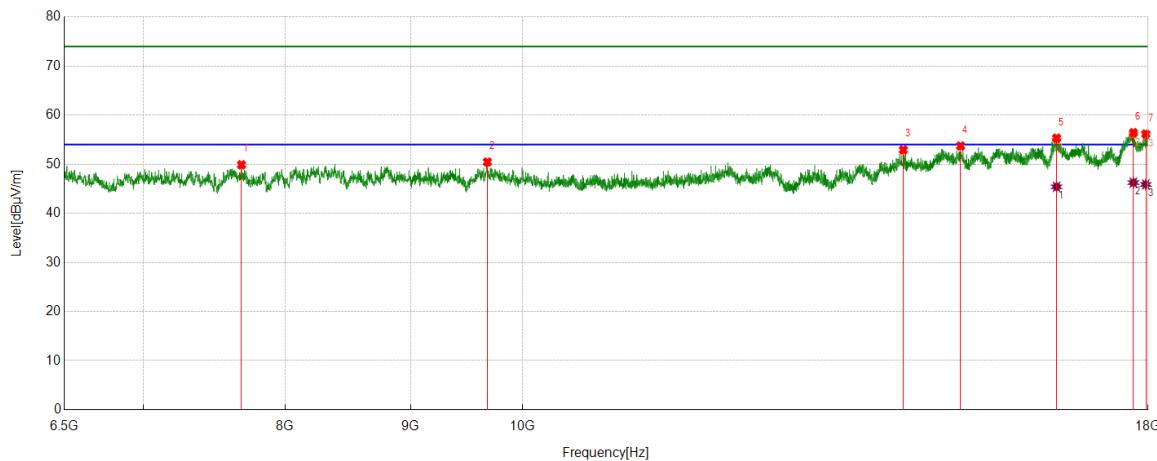
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15591.8865	29.60	13.48	43.08	54.00	-10.92	Vertical
2	16496.1870	29.25	16.57	45.82	54.00	-8.18	Vertical
3	17744.0930	26.97	19.57	46.54	54.00	-7.46	Vertical
4	17985.6232	25.96	20.65	46.61	54.00	-7.39	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS


PK Result:

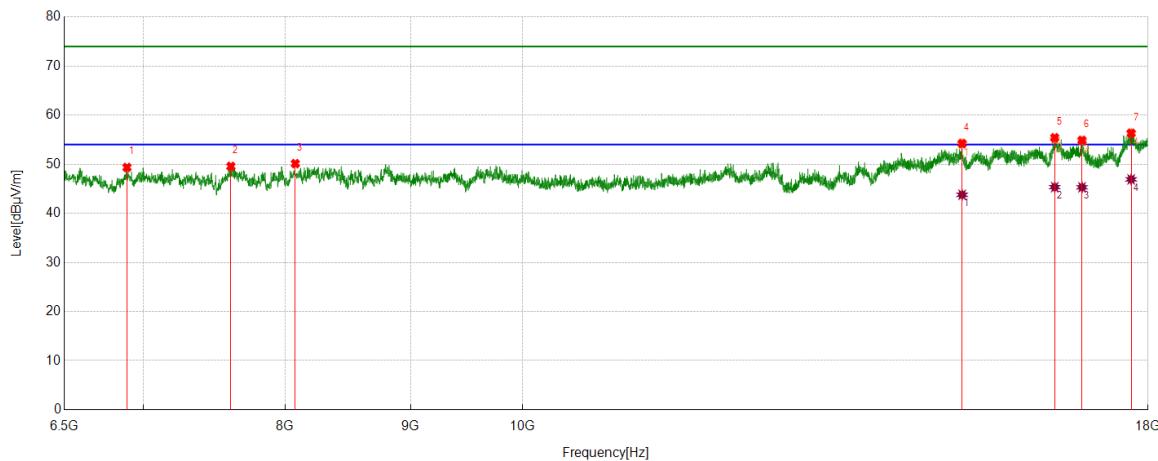
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7678.8974	44.46	5.43	49.89	74.00	-24.11	Horizontal
2	9674.3968	44.01	6.44	50.45	74.00	-23.55	Horizontal
3	14302.2878	40.74	12.19	52.93	74.00	-21.07	Horizontal
4	15093.0116	40.51	13.21	53.72	74.00	-20.28	Horizontal
5	16517.7522	38.64	16.67	55.31	74.00	-18.69	Horizontal
6	17754.1568	36.88	19.54	56.42	74.00	-17.58	Horizontal
7	17962.6203	35.62	20.54	56.16	74.00	-17.84	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16517.7522	28.74	16.67	45.41	54.00	-8.59	Horizontal
2	17754.1568	26.72	19.54	46.26	54.00	-7.74	Horizontal
3	17962.6203	25.34	20.54	45.88	54.00	-8.12	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6895.3619	45.69	3.67	49.36	74.00	-24.64	Vertical
2	7602.7003	44.54	5.03	49.57	74.00	-24.43	Vertical
3	8077.1346	44.33	5.80	50.13	74.00	-23.87	Vertical
4	15114.5768	41.03	13.19	54.22	74.00	-19.78	Vertical
5	16488.9986	38.72	16.68	55.40	74.00	-18.60	Vertical
6	16917.4272	38.12	16.75	54.87	74.00	-19.13	Vertical
7	17716.7771	36.89	19.44	56.33	74.00	-17.67	Vertical

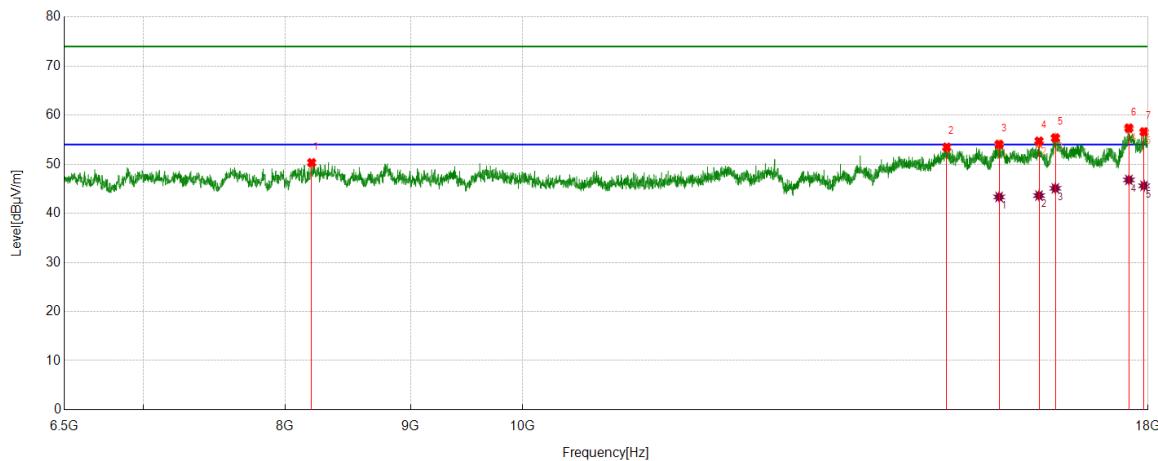
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15114.5768	30.59	13.19	43.78	54.00	-10.22	Vertical
2	16488.9986	28.66	16.68	45.34	54.00	-8.66	Vertical
3	16917.4272	28.55	16.75	45.30	54.00	-8.70	Vertical
4	17716.7771	27.48	19.44	46.92	54.00	-7.08	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS


PK Result:

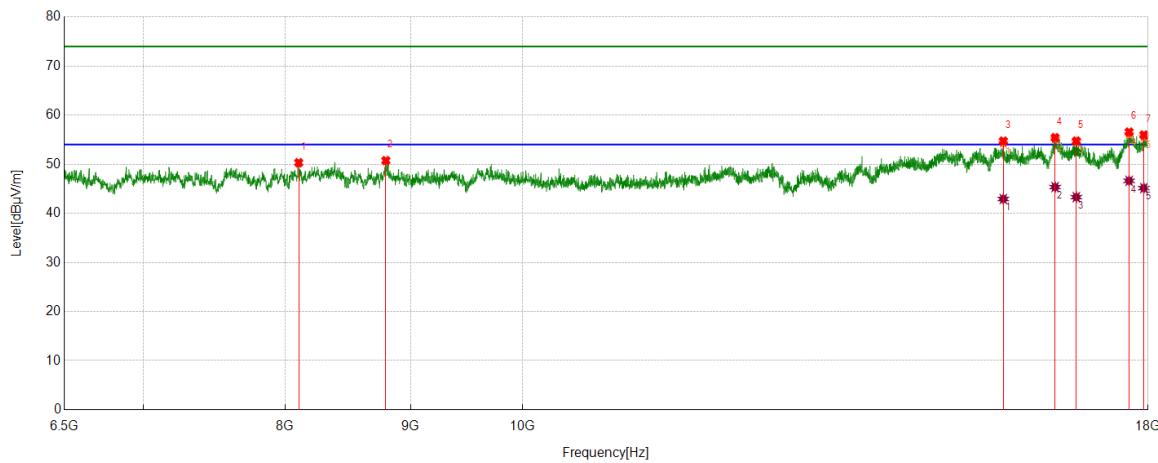
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8202.2128	44.21	6.10	50.31	74.00	-23.69	Horizontal
2	14897.4872	40.73	12.74	53.47	74.00	-20.53	Horizontal
3	15649.3937	40.24	13.81	54.05	74.00	-19.95	Horizontal
4	16247.4684	38.90	15.81	54.71	74.00	-19.29	Horizontal
5	16499.0624	38.84	16.53	55.37	74.00	-18.63	Horizontal
6	17679.3974	38.36	19.01	57.37	74.00	-16.63	Horizontal
7	17933.8667	36.36	20.24	56.60	74.00	-17.40	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15649.3937	29.53	13.81	43.34	54.00	-10.66	Horizontal
2	16247.4684	27.81	15.81	43.62	54.00	-10.38	Horizontal
3	16499.0624	28.56	16.53	45.09	54.00	-8.91	Horizontal
4	17679.3974	27.80	19.01	46.81	54.00	-7.19	Horizontal
5	17933.8667	25.37	20.24	45.61	54.00	-8.39	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8103.0129	44.51	5.80	50.31	74.00	-23.69	Vertical
2	8794.5368	44.43	6.31	50.74	74.00	-23.26	Vertical
3	15711.2139	40.44	14.28	54.72	74.00	-19.28	Vertical
4	16494.7493	38.80	16.61	55.41	74.00	-18.59	Vertical
5	16826.8534	37.74	16.98	54.72	74.00	-19.28	Vertical
6	17682.2728	37.53	19.03	56.56	74.00	-17.44	Vertical
7	17929.5537	35.78	20.18	55.96	74.00	-18.04	Vertical

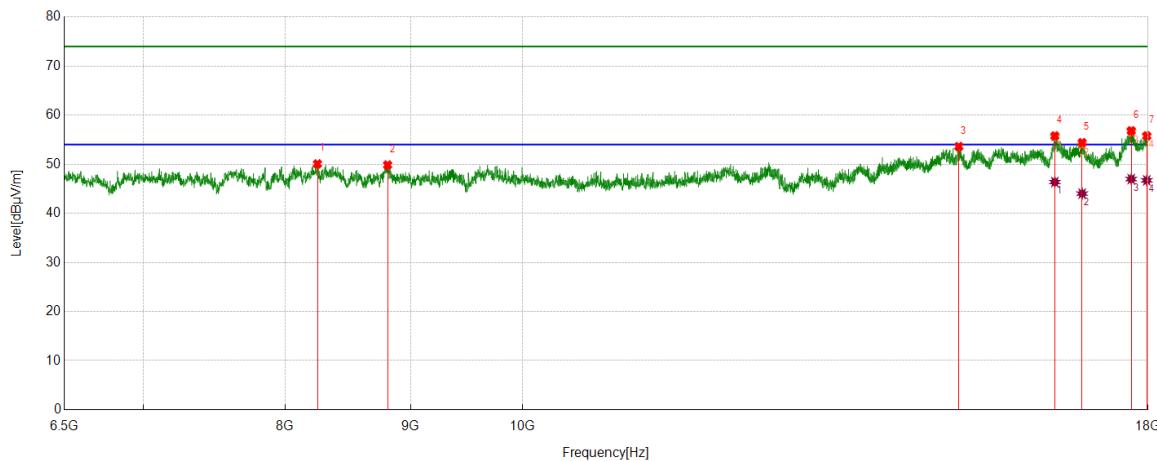
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15711.2139	28.64	14.28	42.92	54.00	-11.08	Vertical
2	16494.7493	28.74	16.61	45.35	54.00	-8.65	Vertical
3	16826.8534	26.32	16.98	43.30	54.00	-10.70	Vertical
4	17682.2728	27.59	19.03	46.62	54.00	-7.38	Vertical
5	17929.5537	24.96	20.18	45.14	54.00	-8.86	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8246.7808	43.90	6.17	50.07	74.00	-23.93	Horizontal
2	8808.9136	43.47	6.38	49.85	74.00	-24.15	Horizontal
3	15067.1334	40.54	13.06	53.60	74.00	-20.40	Horizontal
4	16490.4363	39.08	16.68	55.76	74.00	-18.24	Horizontal
5	16918.8649	37.61	16.78	54.39	74.00	-19.61	Horizontal
6	17718.2148	37.35	19.46	56.81	74.00	-17.19	Horizontal
7	17978.4348	35.12	20.65	55.77	74.00	-18.23	Horizontal

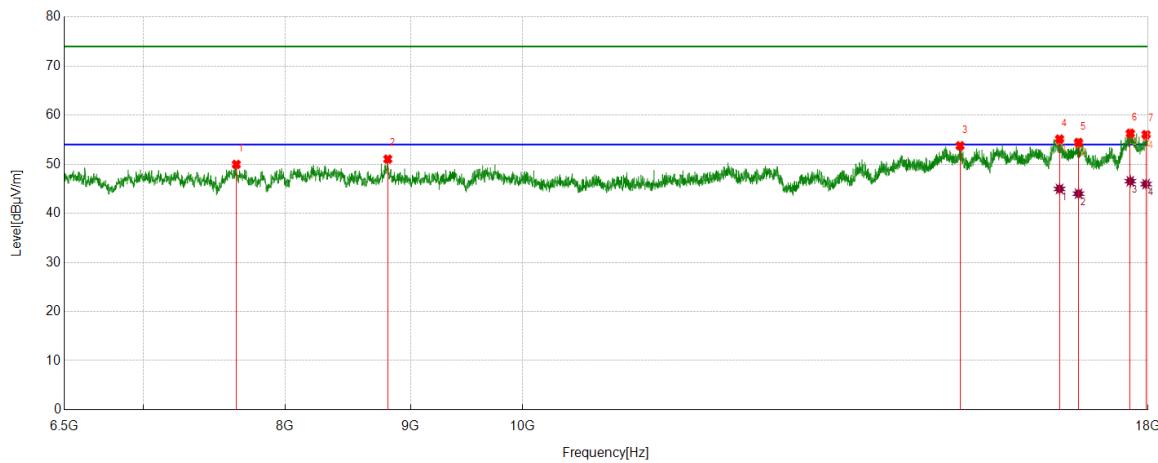
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16490.4363	29.69	16.68	46.37	54.00	-7.63	Horizontal
2	16918.8649	27.24	16.78	44.02	54.00	-9.98	Horizontal
3	17718.2148	27.52	19.46	46.98	54.00	-7.02	Horizontal
4	17978.4348	26.07	20.65	46.72	54.00	-7.28	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7641.5177	44.65	5.32	49.97	74.00	-24.03	Vertical
2	8810.3513	44.66	6.39	51.05	74.00	-22.95	Vertical
3	15085.8232	40.60	13.16	53.76	74.00	-20.24	Vertical
4	16563.7580	38.54	16.59	55.13	74.00	-18.87	Vertical
5	16861.3577	37.42	17.02	54.44	74.00	-19.56	Vertical
6	17702.4003	37.01	19.29	56.30	74.00	-17.70	Vertical
7	17966.9334	35.51	20.53	56.04	74.00	-17.96	Vertical

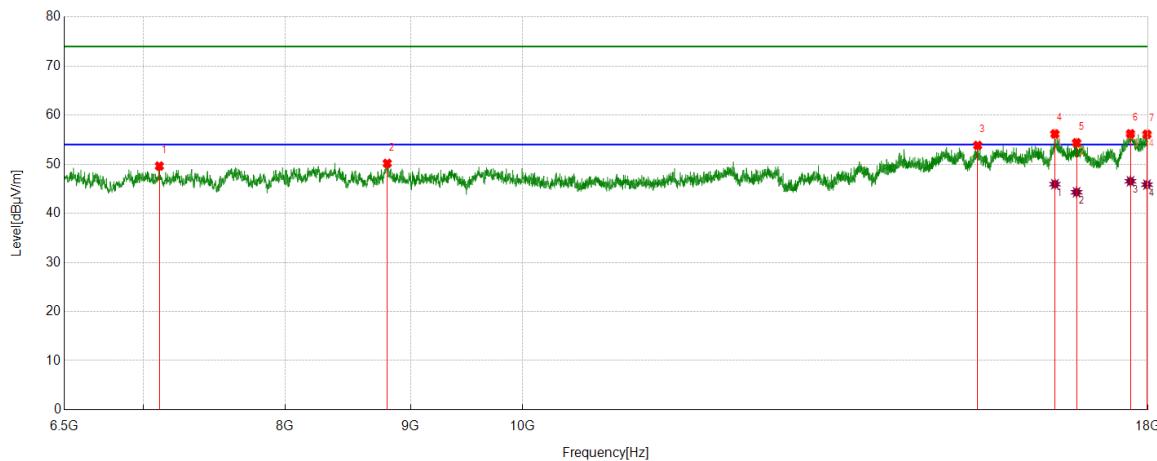
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16563.7580	28.38	16.59	44.97	54.00	-9.03	Vertical
2	16861.3577	26.98	17.02	44.00	54.00	-10.00	Vertical
3	17702.4003	27.26	19.29	46.55	54.00	-7.45	Vertical
4	17966.9334	25.43	20.53	45.96	54.00	-8.04	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7108.1385	45.62	4.01	49.63	74.00	-24.37	Horizontal
2	8806.0383	43.82	6.36	50.18	74.00	-23.82	Horizontal
3	15337.4172	40.43	13.41	53.84	74.00	-20.16	Horizontal
4	16491.8740	39.52	16.66	56.18	74.00	-17.82	Horizontal
5	16831.1664	37.29	17.09	54.38	74.00	-19.62	Horizontal
6	17705.2757	36.89	19.32	56.21	74.00	-17.79	Horizontal
7	17982.7478	35.44	20.66	56.10	74.00	-17.90	Horizontal

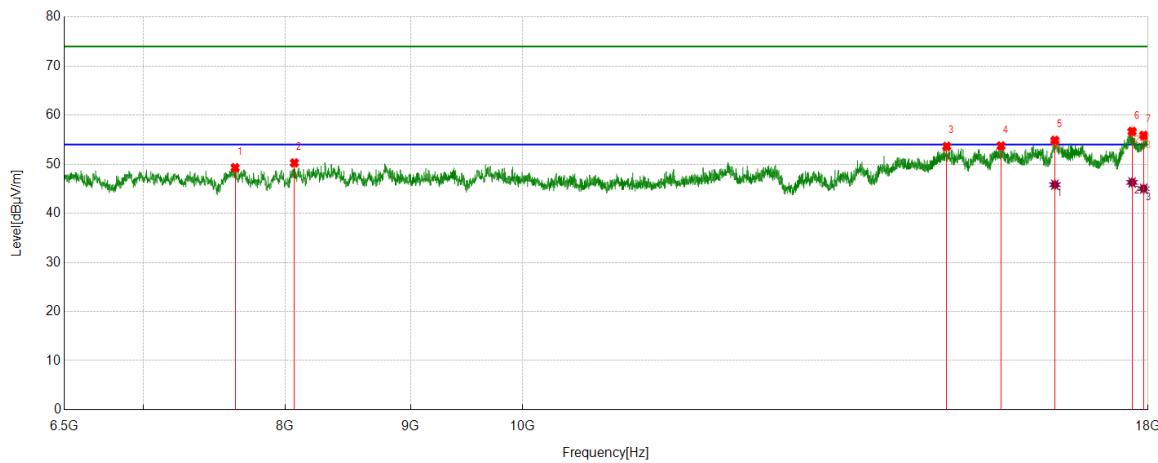
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16491.8740	29.28	16.66	45.94	54.00	-8.06	Horizontal
2	16831.1664	27.21	17.09	44.30	54.00	-9.70	Horizontal
3	17705.2757	27.21	19.32	46.53	54.00	-7.47	Horizontal
4	17982.7478	25.19	20.66	45.85	54.00	-8.15	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS


PK Result:

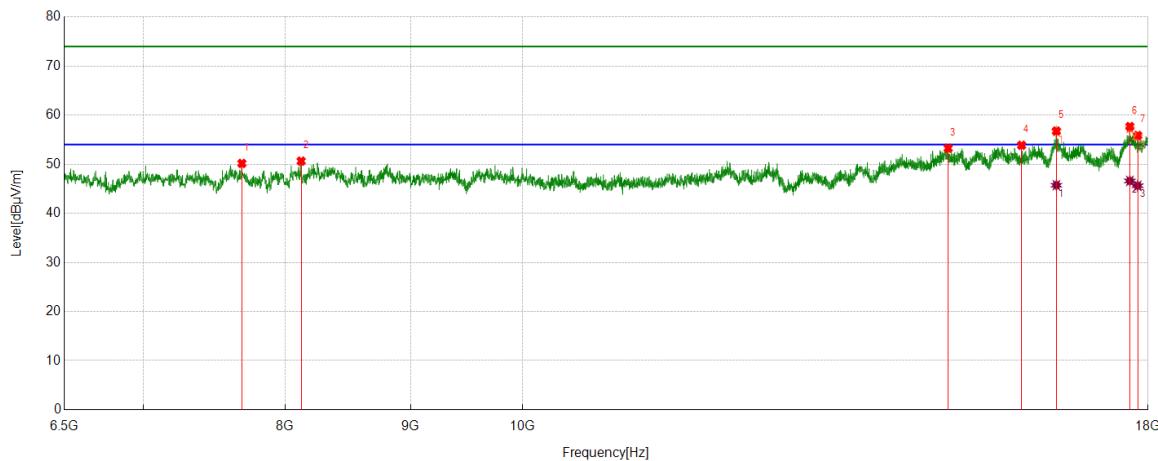
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7632.8916	44.03	5.27	49.30	74.00	-24.70	Vertical
2	8069.9462	44.34	5.94	50.28	74.00	-23.72	Vertical
3	14897.4872	40.89	12.74	53.63	74.00	-20.37	Vertical
4	15676.7096	39.78	13.95	53.73	74.00	-20.27	Vertical
5	16491.8740	38.19	16.66	54.85	74.00	-19.15	Vertical
6	17732.5916	37.15	19.54	56.69	74.00	-17.31	Vertical
7	17926.6783	35.73	20.16	55.89	74.00	-18.11	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16491.8740	29.17	16.66	45.83	54.00	-8.17	Vertical
2	17732.5916	26.76	19.54	46.30	54.00	-7.70	Vertical
3	17926.6783	24.87	20.16	45.03	54.00	-8.97	Vertical

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS


PK Result:

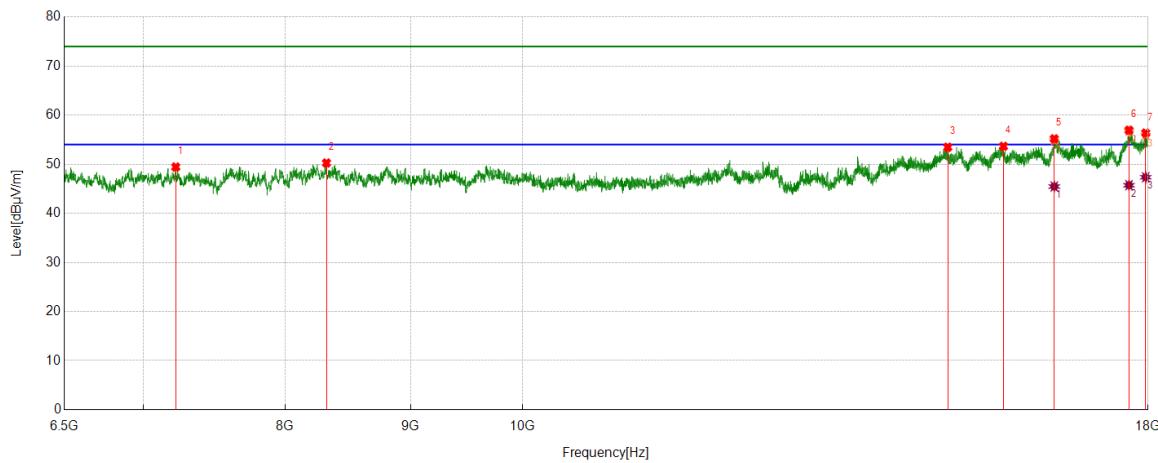
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7681.7727	44.77	5.40	50.17	74.00	-23.83	Horizontal
2	8121.7027	44.94	5.70	50.64	74.00	-23.36	Horizontal
3	14917.6147	40.51	12.75	53.26	74.00	-20.74	Horizontal
4	15982.9354	38.99	14.87	53.86	74.00	-20.14	Horizontal
5	16514.8769	40.06	16.70	56.76	74.00	-17.24	Horizontal
6	17695.2119	38.48	19.20	57.68	74.00	-16.32	Horizontal
7	17826.0408	36.10	19.76	55.86	74.00	-18.14	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16514.8769	29.03	16.70	45.73	54.00	-8.27	Horizontal
2	17695.2119	27.40	19.20	46.60	54.00	-7.40	Horizontal
3	17826.0408	25.86	19.76	45.62	54.00	-8.38	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS


PK Result:

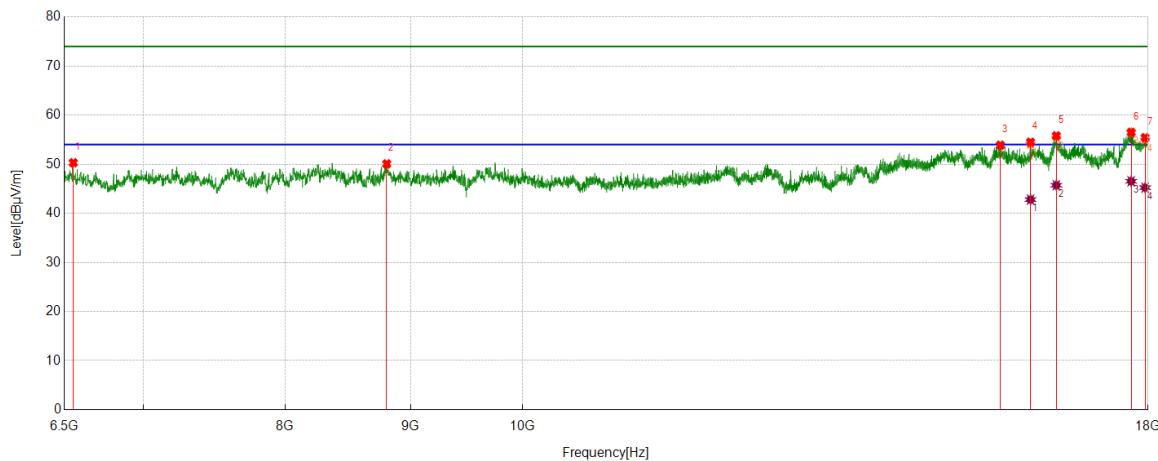
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7218.8399	45.36	4.08	49.44	74.00	-24.56	Vertical
2	8317.2272	44.21	6.05	50.26	74.00	-23.74	Vertical
3	14911.8640	40.73	12.73	53.46	74.00	-20.54	Vertical
4	15712.6516	39.37	14.28	53.65	74.00	-20.35	Vertical
5	16481.8102	38.57	16.61	55.18	74.00	-18.82	Vertical
6	17680.8351	37.90	19.03	56.93	74.00	-17.07	Vertical
7	17961.1826	35.80	20.55	56.35	74.00	-17.65	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16481.8102	28.85	16.61	45.46	54.00	-8.54	Vertical
2	17680.8351	26.70	19.03	45.73	54.00	-8.27	Vertical
3	17961.1826	26.80	20.55	47.35	54.00	-6.65	Vertical

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6556.0695	46.89	3.41	50.30	74.00	-23.70	Horizontal
2	8801.7252	43.75	6.32	50.07	74.00	-23.93	Horizontal
3	15668.0835	39.98	13.91	53.89	74.00	-20.11	Horizontal
4	16118.0773	39.10	15.38	54.48	74.00	-19.52	Horizontal
5	16513.4392	39.08	16.71	55.79	74.00	-18.21	Horizontal
6	17716.7771	37.06	19.44	56.50	74.00	-17.50	Horizontal
7	17951.1189	34.96	20.45	55.41	74.00	-18.59	Horizontal

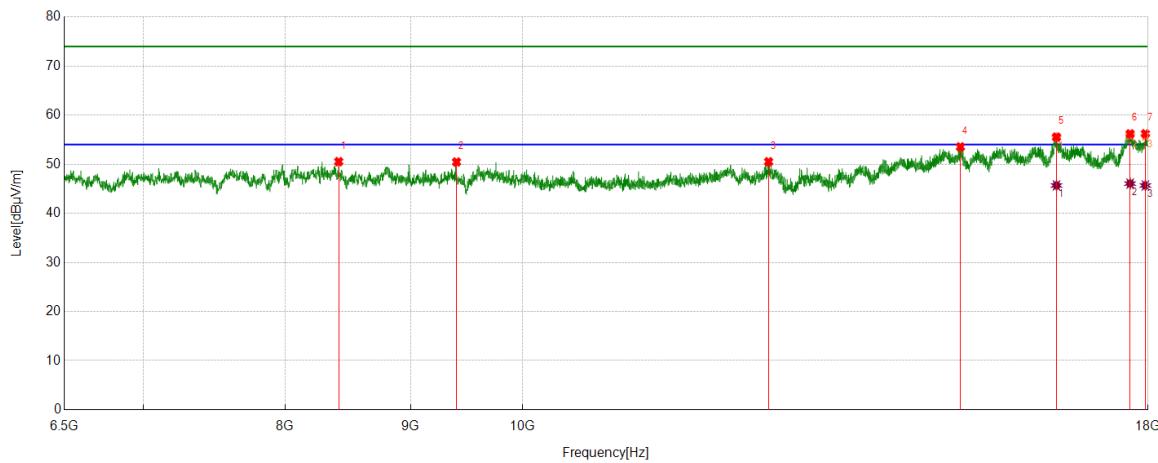
AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16118.0773	27.42	15.38	42.80	54.00	-11.20	Horizontal
2	16513.4392	29.01	16.71	45.72	54.00	-8.28	Horizontal
3	17716.7771	27.09	19.44	46.53	54.00	-7.47	Horizontal
4	17951.1189	24.78	20.45	45.23	54.00	-8.77	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8413.5517	44.11	6.42	50.53	74.00	-23.47	Vertical
2	9398.3623	44.06	6.40	50.46	74.00	-23.54	Vertical
3	12601.5127	41.78	8.73	50.51	74.00	-23.49	Vertical
4	15090.1363	40.32	13.22	53.54	74.00	-20.46	Vertical
5	16516.3145	38.86	16.68	55.54	74.00	-18.46	Vertical
6	17699.5249	36.92	19.27	56.19	74.00	-17.81	Vertical
7	17955.4319	35.71	20.50	56.21	74.00	-17.79	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16516.3145	29.00	16.68	45.68	54.00	-8.32	Vertical
2	17699.5249	26.79	19.27	46.06	54.00	-7.94	Vertical
3	17955.4319	25.18	20.50	45.68	54.00	-8.32	Vertical

Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.