


Test Mode	Channel	Polarization	Verdict
11ac VHT20	5825	Vertical	PASS

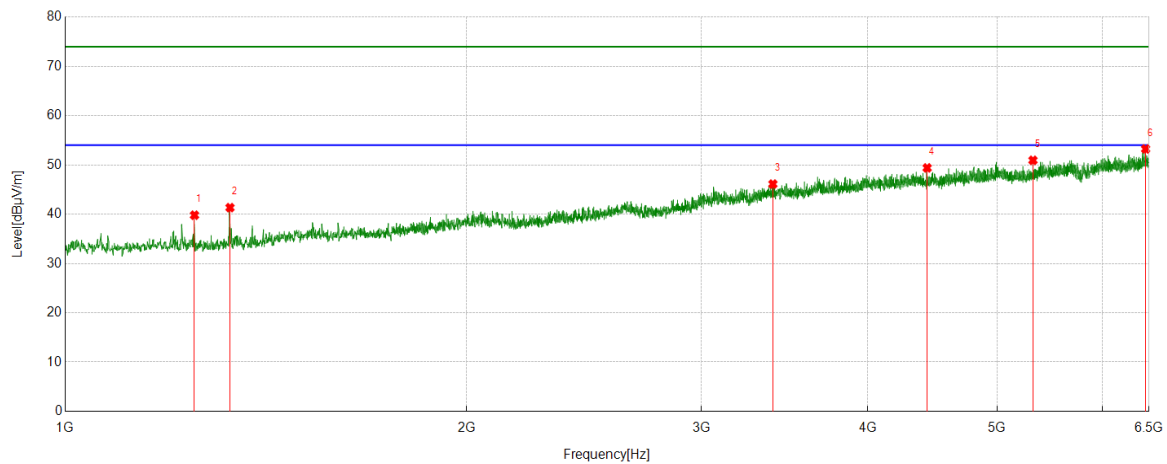


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1250.2813	41.81	-2.01	39.80	74.00	-34.20	Vertical
2	1329.3537	43.05	-1.72	41.33	74.00	-32.67	Vertical
3	3394.8619	36.06	10.06	46.12	74.00	-27.88	Vertical
4	4431.0539	36.04	13.36	49.40	74.00	-24.60	Vertical
5	5319.4149	35.57	15.37	50.94	74.00	-23.06	Vertical
6	6462.1828	33.32	19.92	53.24	74.00	-20.76	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Horizontal	PASS

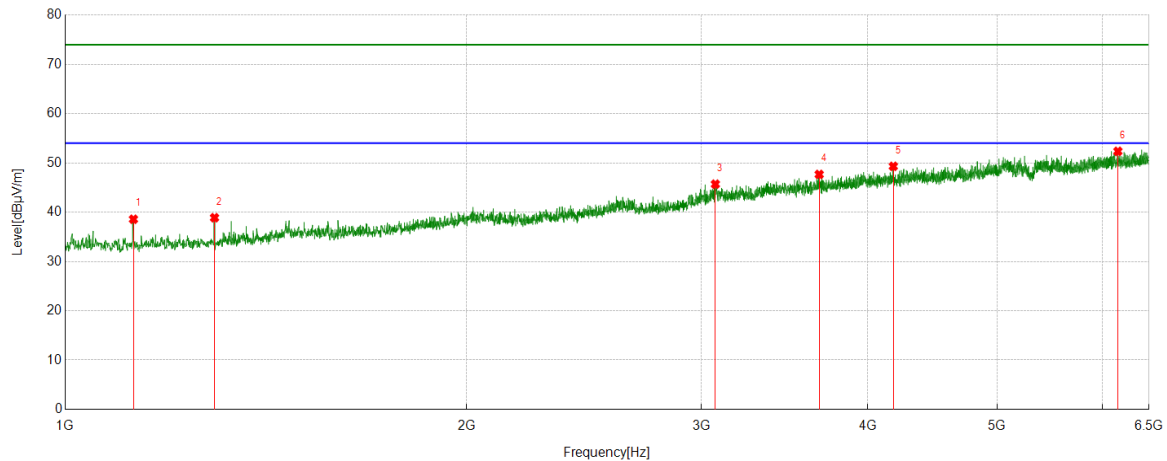


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1125.1406	40.82	-2.25	38.57	74.00	-35.43	Horizontal
2	1294.2868	40.76	-1.88	38.88	74.00	-35.12	Horizontal
3	3073.7592	36.36	9.33	45.69	74.00	-28.31	Horizontal
4	3677.4597	35.39	12.28	47.67	74.00	-26.33	Horizontal
5	4179.3974	36.23	13.08	49.31	74.00	-24.69	Horizontal
6	6159.6450	33.97	18.39	52.36	74.00	-21.64	Horizontal

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Vertical	PASS

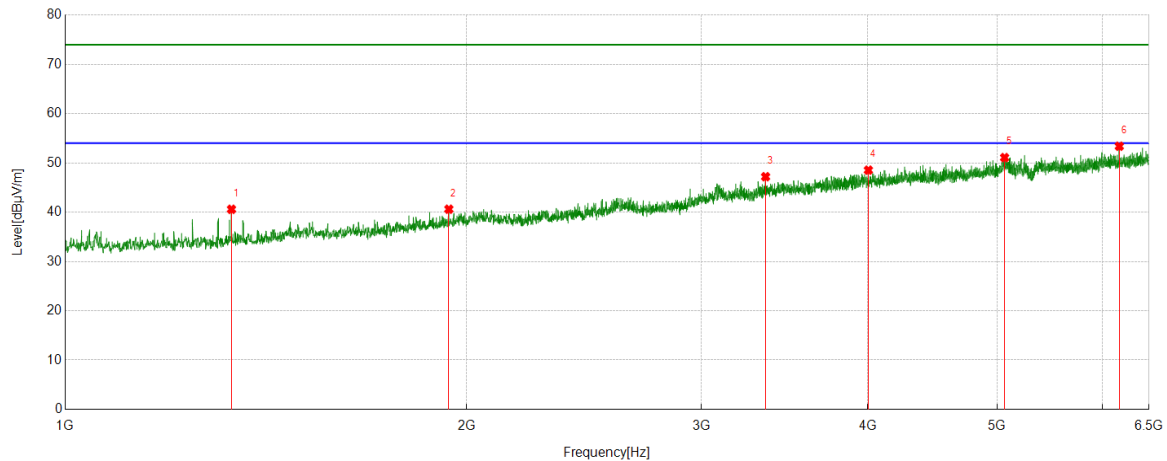


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1332.7916	42.38	-1.79	40.59	74.00	-33.41	Vertical
2	1939.9300	37.65	2.96	40.61	74.00	-33.39	Vertical
3	3352.2315	36.64	10.56	47.20	74.00	-26.80	Vertical
4	4003.3754	35.57	12.96	48.53	74.00	-25.47	Vertical
5	5065.0081	34.70	16.38	51.08	74.00	-22.92	Vertical
6	6174.7718	35.07	18.32	53.39	74.00	-20.61	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Horizontal	PASS

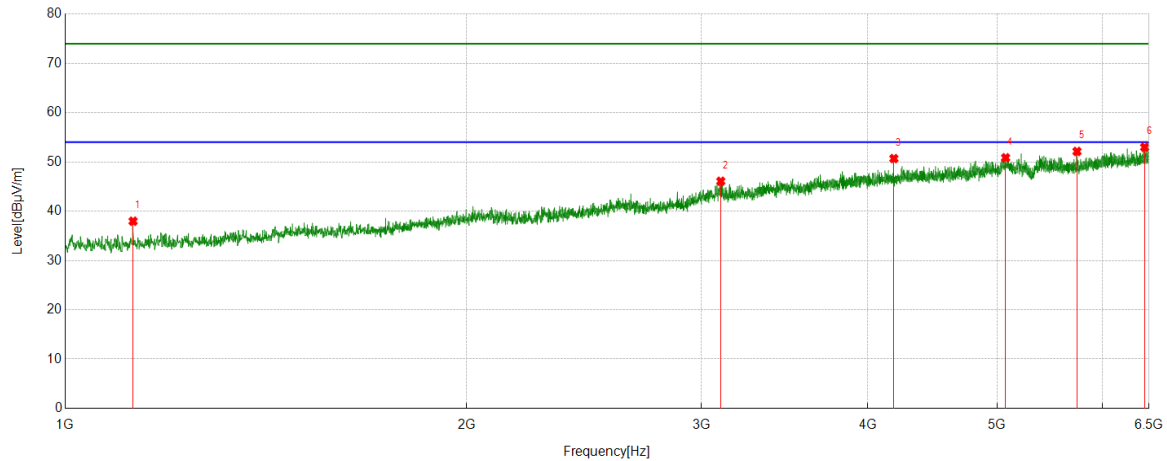

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	40.20	-2.23	37.97	74.00	-36.03	Horizontal
2	3102.6378	35.92	10.16	46.08	74.00	-27.92	Horizontal
3	4183.5229	37.52	13.16	50.68	74.00	-23.32	Horizontal
4	5073.9467	34.47	16.37	50.84	74.00	-23.16	Horizontal
5	5739.5299	35.27	16.86	52.13	74.00	-21.87	Horizontal
6	6451.1814	33.37	19.61	52.98	74.00	-21.02	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Vertical	PASS

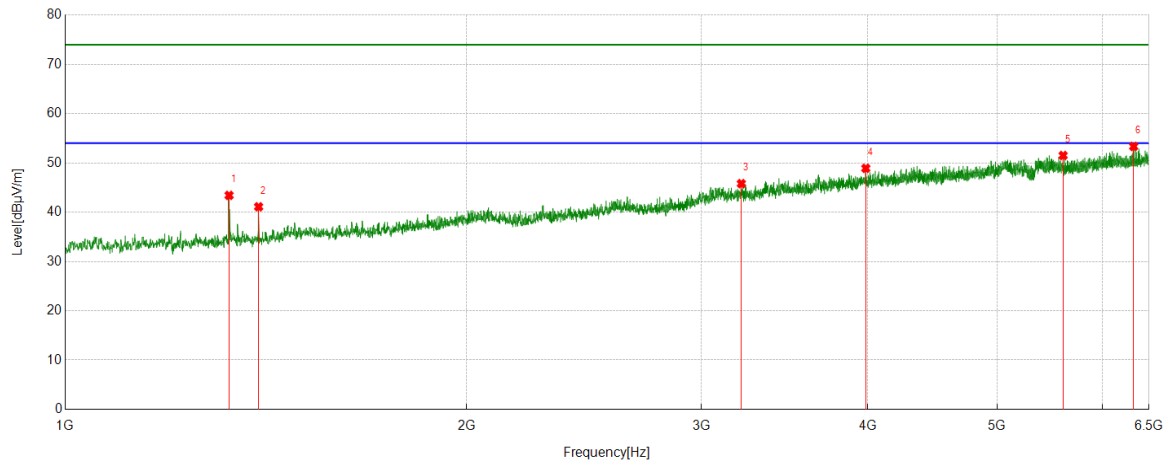


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1327.2909	45.35	-1.93	43.42	74.00	-30.58	Vertical
2	1396.7371	42.23	-1.13	41.10	74.00	-32.90	Vertical
3	3214.7143	36.71	9.09	45.80	74.00	-28.20	Vertical
4	3985.4982	35.79	13.12	48.91	74.00	-25.09	Vertical
5	5604.0755	34.89	16.62	51.51	74.00	-22.49	Vertical
6	6330.1663	34.46	18.89	53.35	74.00	-20.65	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Horizontal	PASS

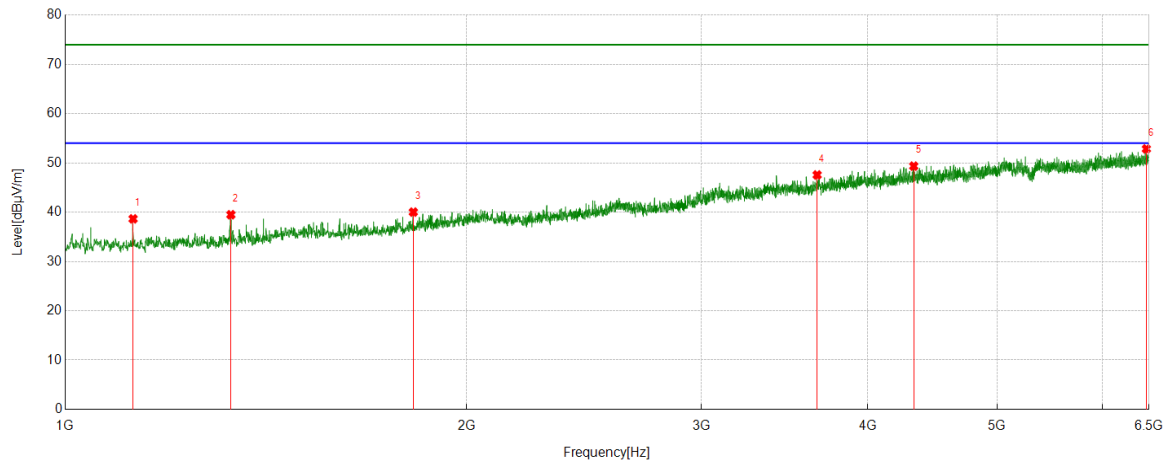


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1124.4531	40.88	-2.23	38.65	74.00	-35.35	Horizontal
2	1331.4164	41.33	-1.84	39.49	74.00	-34.51	Horizontal
3	1824.4156	38.10	1.92	40.02	74.00	-33.98	Horizontal
4	3664.3955	35.96	11.60	47.56	74.00	-26.44	Horizontal
5	4329.2912	35.76	13.59	49.35	74.00	-24.65	Horizontal
6	6470.4338	33.16	19.69	52.85	74.00	-21.15	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Vertical	PASS

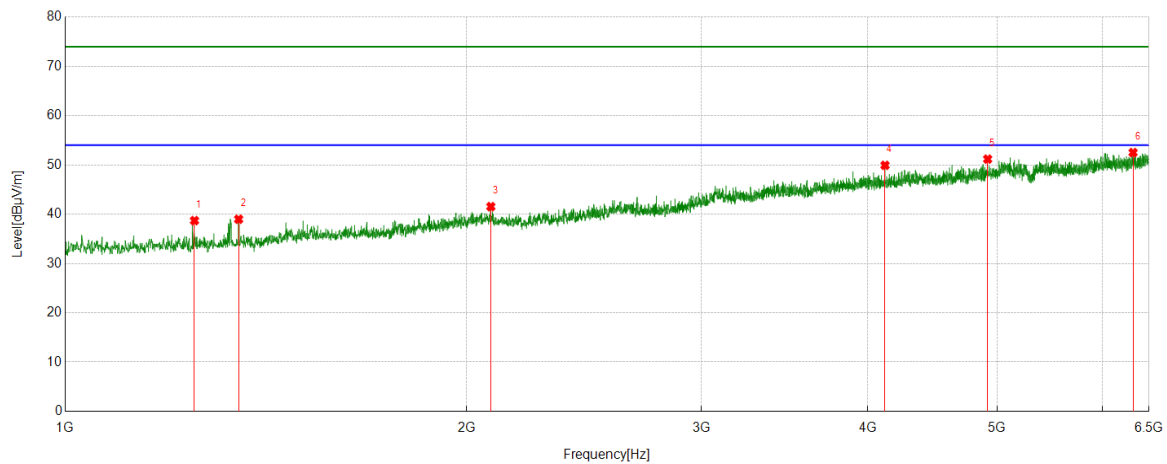


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1250.2813	40.18	-1.48	38.70	74.00	-35.30	Vertical
2	1349.2937	40.24	-1.26	38.98	74.00	-35.02	Vertical
3	2085.6982	37.27	4.27	41.54	74.00	-32.46	Vertical
4	4120.2650	36.79	13.13	49.92	74.00	-24.08	Vertical
5	4919.2399	35.89	15.29	51.18	74.00	-22.82	Vertical
6	6323.2904	33.55	18.96	52.51	74.00	-21.49	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Horizontal	PASS

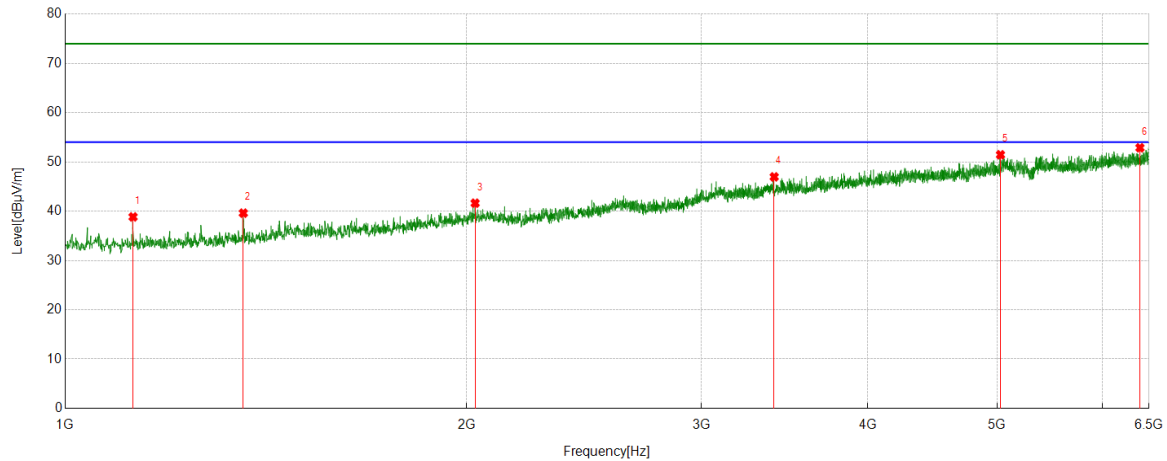


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	41.07	-2.23	38.84	74.00	-35.16	Horizontal
2	1360.2950	40.84	-1.23	39.61	74.00	-34.39	Horizontal
3	2030.0038	37.77	3.86	41.63	74.00	-32.37	Horizontal
4	3402.4253	36.31	10.66	46.97	74.00	-27.03	Horizontal
5	5029.2537	35.86	15.59	51.45	74.00	-22.55	Horizontal
6	6398.9249	33.60	19.27	52.87	74.00	-21.13	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Vertical	PASS

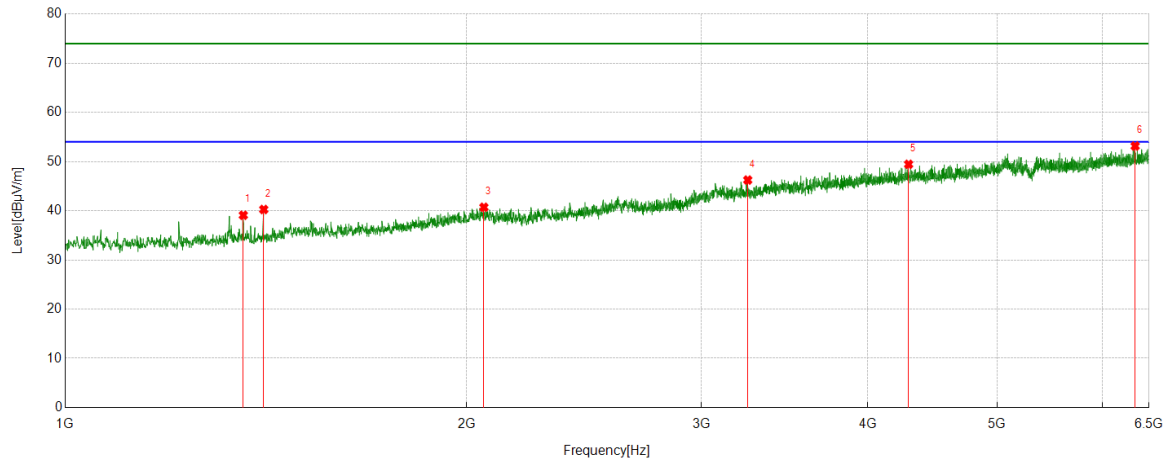

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1360.2950	40.32	-1.23	39.09	74.00	-34.91	Vertical
2	1409.1136	41.24	-0.98	40.26	74.00	-33.74	Vertical
3	2060.9451	36.27	4.44	40.71	74.00	-33.29	Vertical
4	3250.4688	36.45	9.80	46.25	74.00	-27.75	Vertical
5	4291.4739	35.99	13.46	49.45	74.00	-24.55	Vertical
6	6345.9807	34.22	18.94	53.16	74.00	-20.84	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Horizontal	PASS

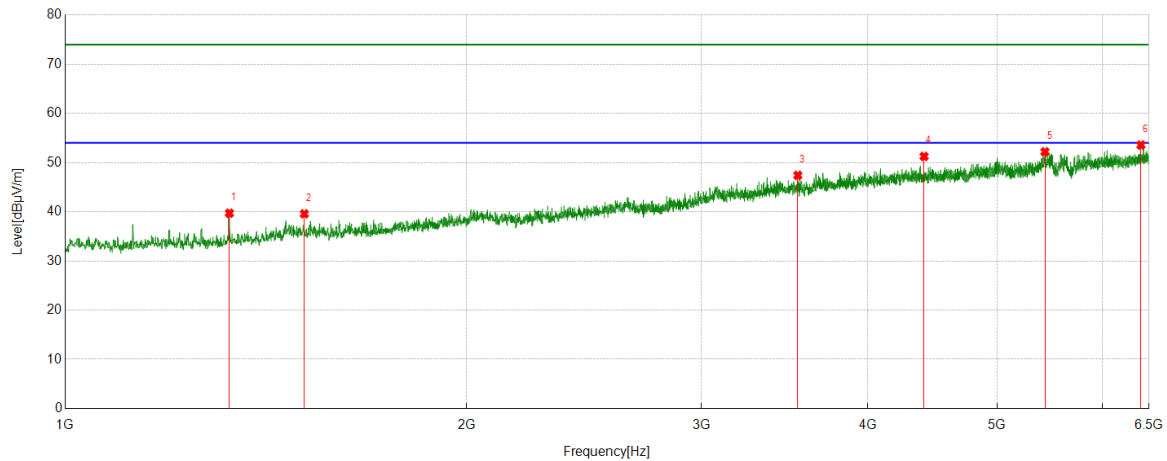


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1327.9785	41.56	-1.85	39.71	74.00	-34.29	Horizontal
2	1511.5639	39.57	0.01	39.58	74.00	-34.42	Horizontal
3	3544.0680	36.07	11.34	47.41	74.00	-26.59	Horizontal
4	4407.6760	37.27	13.98	51.25	74.00	-22.75	Horizontal
5	5430.8038	34.29	17.91	52.20	74.00	-21.80	Horizontal
6	6409.9262	34.17	19.40	53.57	74.00	-20.43	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Vertical	PASS

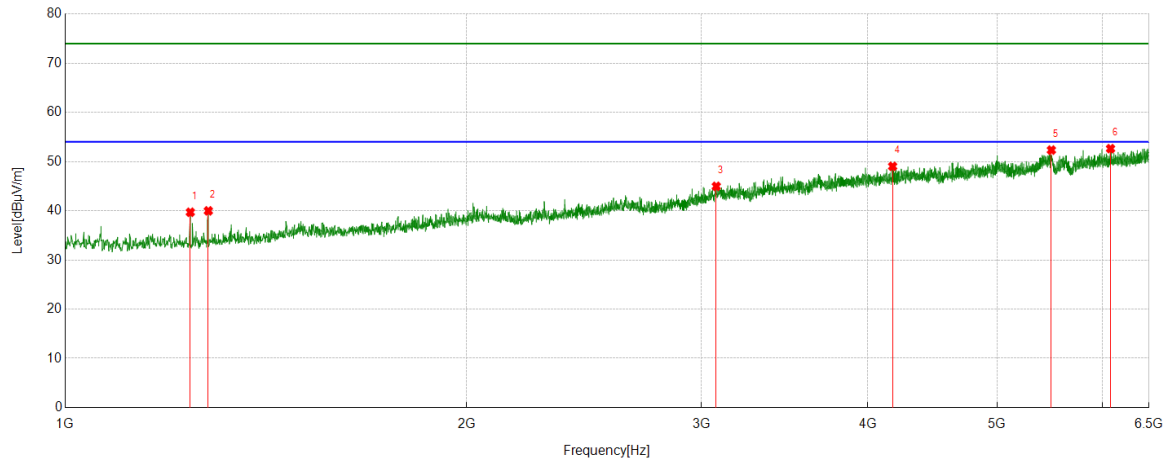

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1241.3427	41.57	-1.87	39.70	74.00	-34.30	Vertical
2	1280.5351	41.88	-1.90	39.98	74.00	-34.02	Vertical
3	3078.5723	35.32	9.65	44.97	74.00	-29.03	Vertical
4	4174.5843	35.77	13.26	49.03	74.00	-24.97	Vertical
5	5491.3114	34.51	17.83	52.34	74.00	-21.66	Vertical
6	6081.9477	34.37	18.26	52.63	74.00	-21.37	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Horizontal	PASS

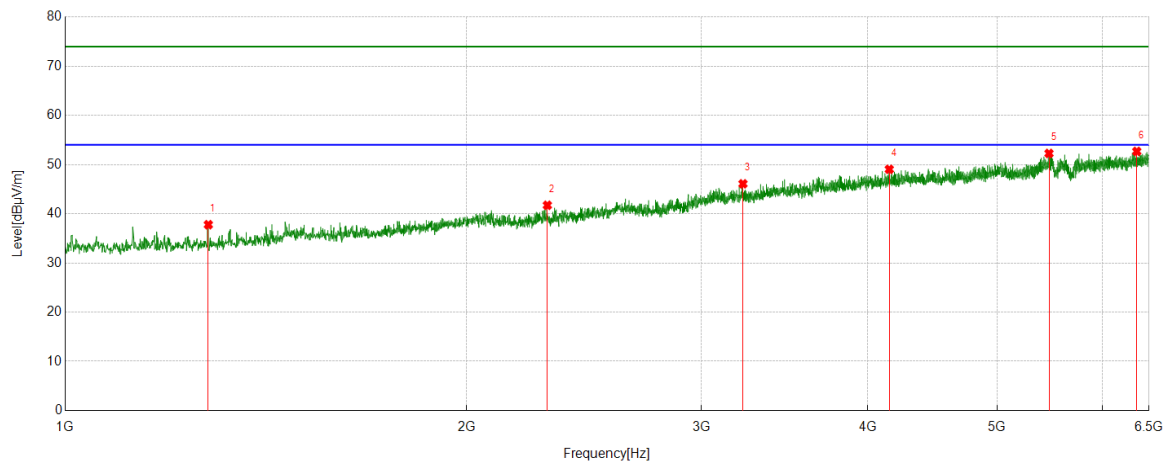

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1280.5351	39.68	-1.90	37.78	74.00	-36.22	Horizontal
2	2299.5374	37.30	4.43	41.73	74.00	-32.27	Horizontal
3	3223.6530	37.08	9.01	46.09	74.00	-27.91	Horizontal
4	4150.5188	35.70	13.34	49.04	74.00	-24.96	Horizontal
5	5469.3087	34.41	17.86	52.27	74.00	-21.73	Horizontal
6	6363.8580	33.35	19.33	52.68	74.00	-21.32	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Vertical	PASS

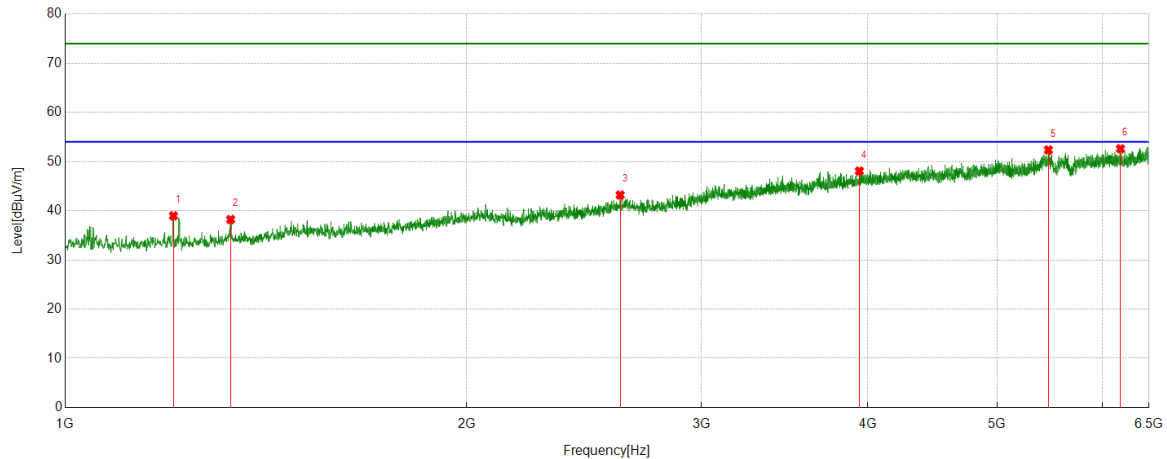

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1205.5882	40.89	-1.92	38.97	74.00	-35.03	Vertical
2	1330.7288	40.03	-1.80	38.23	74.00	-35.77	Vertical
3	2607.5759	36.94	6.26	43.20	74.00	-30.80	Vertical
4	3941.4927	35.47	12.60	48.07	74.00	-25.93	Vertical
5	5463.1204	34.49	17.87	52.36	74.00	-21.64	Vertical
6	6187.1484	34.13	18.48	52.61	74.00	-21.39	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Horizontal	PASS

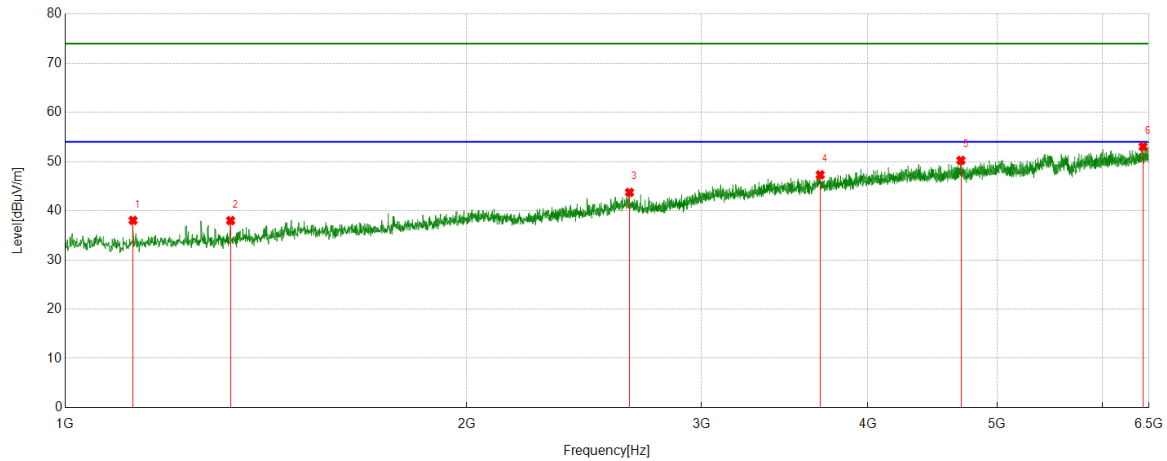


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	40.35	-2.31	38.04	74.00	-35.96	Horizontal
2	1330.7288	39.80	-1.80	38.00	74.00	-36.00	Horizontal
3	2650.2063	37.02	6.71	43.73	74.00	-30.27	Horizontal
4	3683.6480	34.91	12.40	47.31	74.00	-26.69	Horizontal
5	4697.1496	35.39	14.85	50.24	74.00	-23.76	Horizontal
6	6433.9917	33.50	19.54	53.04	74.00	-20.96	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Vertical	PASS

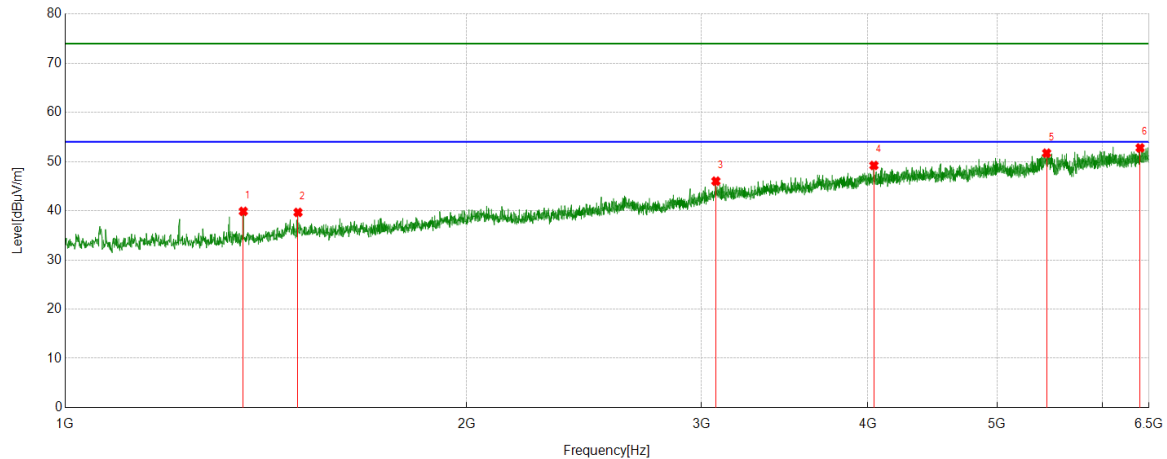

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1360.2950	41.28	-1.40	39.88	74.00	-34.12	Vertical
2	1495.0619	39.49	0.18	39.67	74.00	-34.33	Vertical
3	3076.5096	36.48	9.54	46.02	74.00	-27.98	Vertical
4	4041.8802	36.08	13.13	49.21	74.00	-24.79	Vertical
5	5446.6183	33.84	17.88	51.72	74.00	-22.28	Vertical
6	6400.3000	33.22	19.56	52.78	74.00	-21.22	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Horizontal	PASS

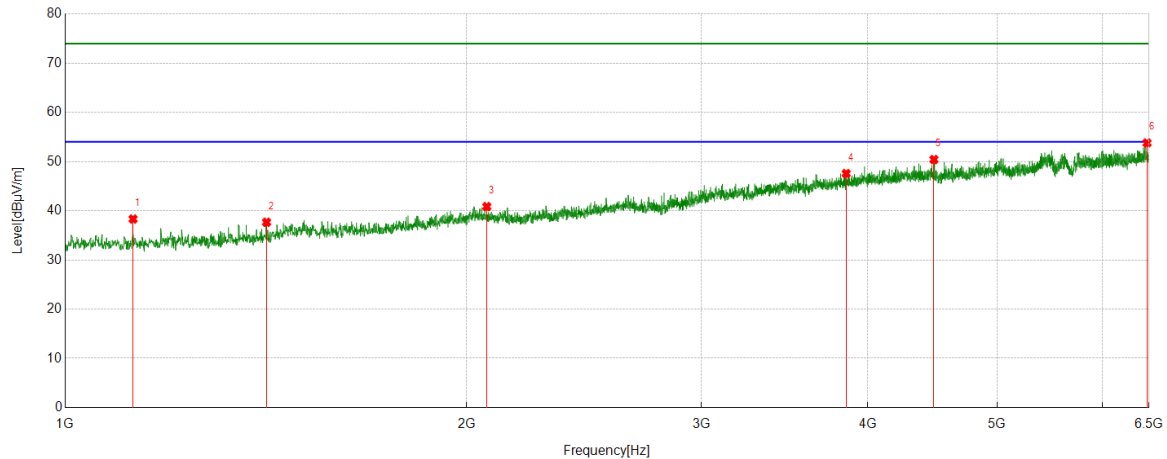


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	40.63	-2.31	38.32	74.00	-35.68	Horizontal
2	1415.9895	38.75	-1.09	37.66	74.00	-36.34	Horizontal
3	2071.2589	36.50	4.35	40.85	74.00	-33.15	Horizontal
4	3852.7941	35.28	12.29	47.57	74.00	-26.43	Horizontal
5	4483.3104	36.35	14.07	50.42	74.00	-23.58	Horizontal
6	6477.9972	33.87	19.92	53.79	74.00	-20.21	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Vertical	PASS

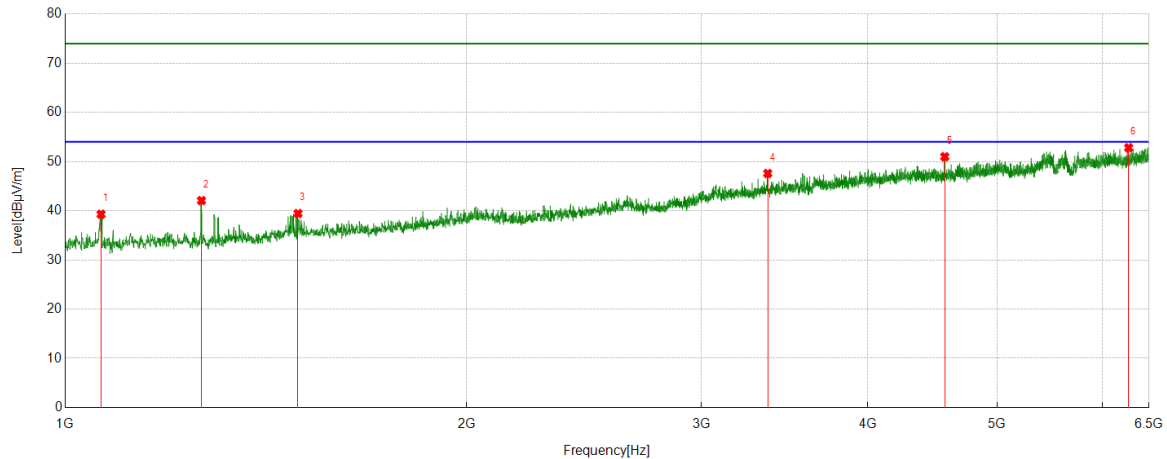

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1063.9455	41.24	-1.95	39.29	74.00	-34.71	Vertical
2	1265.4082	43.89	-1.82	42.07	74.00	-31.93	Vertical
3	1495.0619	39.26	0.18	39.44	74.00	-34.56	Vertical
4	3364.6081	37.22	10.37	47.59	74.00	-26.41	Vertical
5	4567.8835	36.91	14.08	50.99	74.00	-23.01	Vertical
6	6275.1594	34.15	18.67	52.82	74.00	-21.18	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Horizontal	PASS

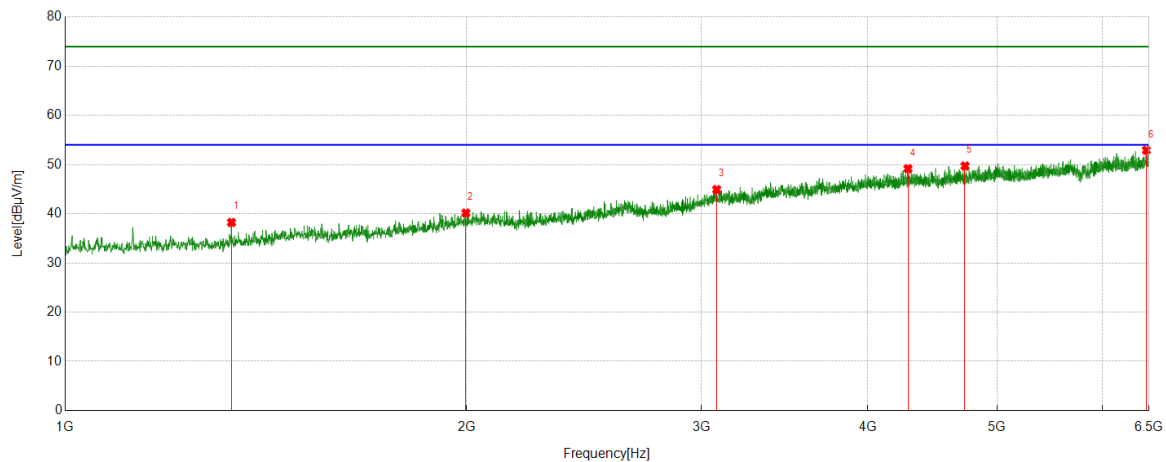

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1332.7916	39.93	-1.69	38.24	74.00	-35.76	Horizontal
2	1997.6872	36.50	3.64	40.14	74.00	-33.86	Horizontal
3	3080.6351	36.08	8.83	44.91	74.00	-29.09	Horizontal
4	4286.6608	36.19	12.97	49.16	74.00	-24.84	Horizontal
5	4730.1538	35.79	13.92	49.71	74.00	-24.29	Horizontal
6	6470.4338	33.01	19.91	52.92	74.00	-21.08	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Vertical	PASS

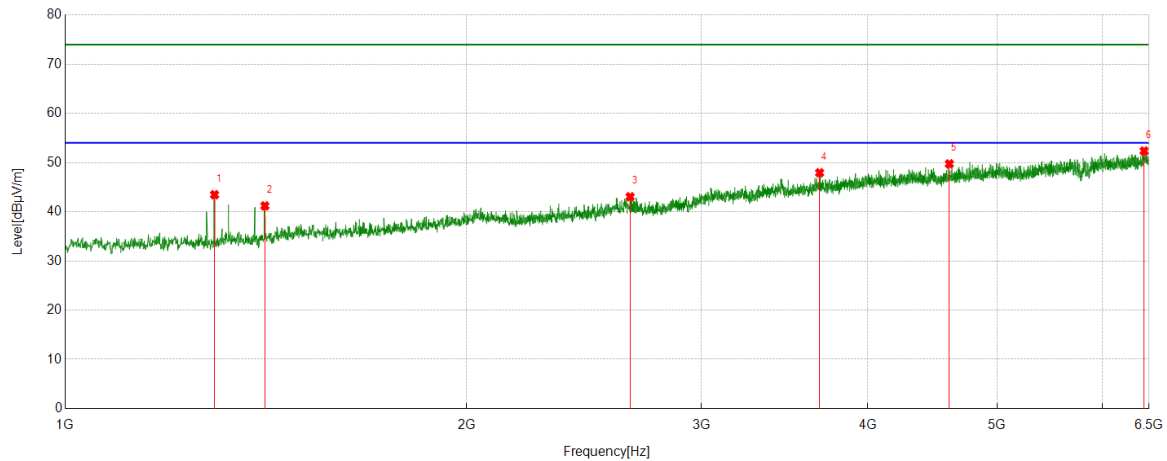


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1294.2868	45.50	-2.03	43.47	74.00	-30.53	Vertical
2	1411.8640	42.18	-0.98	41.20	74.00	-32.80	Vertical
3	2652.9566	36.06	6.99	43.05	74.00	-30.95	Vertical
4	3680.2100	35.22	12.71	47.93	74.00	-26.07	Vertical
5	4604.3255	35.72	14.02	49.74	74.00	-24.26	Vertical
6	6444.9931	32.85	19.51	52.36	74.00	-21.64	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Horizontal	PASS

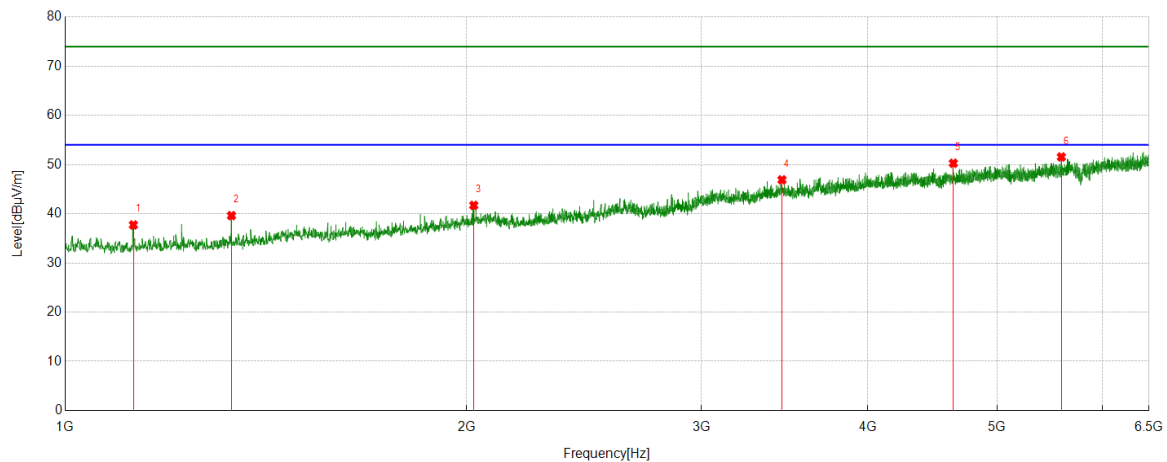

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1125.1406	40.15	-2.42	37.73	74.00	-36.27	Horizontal
2	1332.7916	41.31	-1.69	39.62	74.00	-34.38	Horizontal
3	2025.1906	37.86	3.85	41.71	74.00	-32.29	Horizontal
4	3448.4936	35.39	11.51	46.90	74.00	-27.10	Horizontal
5	4635.9545	36.11	14.16	50.27	74.00	-23.73	Horizontal
6	5586.8859	35.06	16.49	51.55	74.00	-22.45	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Vertical	PASS

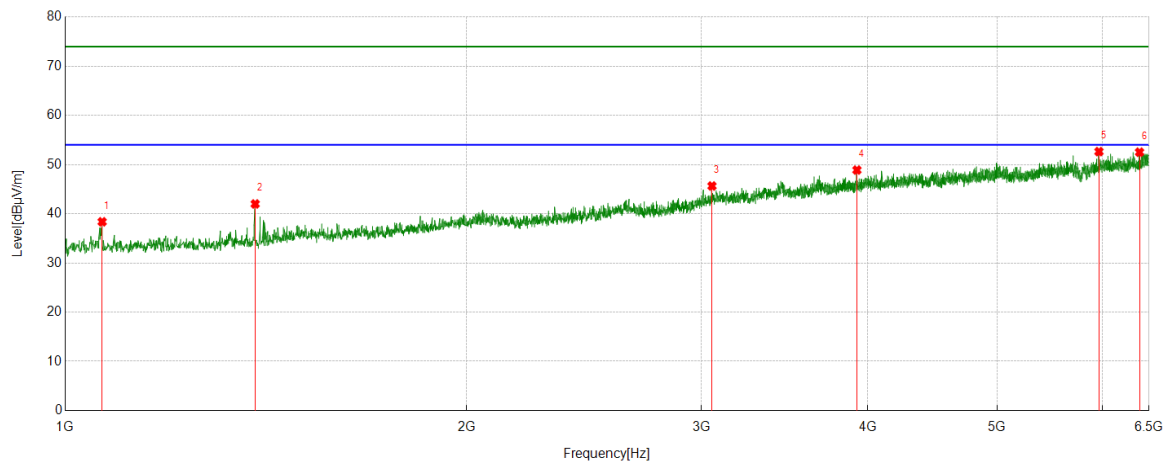


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1066.0083	40.09	-1.72	38.37	74.00	-35.63	Vertical
2	1388.4861	43.37	-1.37	42.00	74.00	-32.00	Vertical
3	3055.8820	37.02	8.63	45.65	74.00	-28.35	Vertical
4	3924.9906	36.98	11.91	48.89	74.00	-25.11	Vertical
5	5961.6202	35.42	17.22	52.64	74.00	-21.36	Vertical
6	6394.1118	33.87	18.65	52.52	74.00	-21.48	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Horizontal	PASS

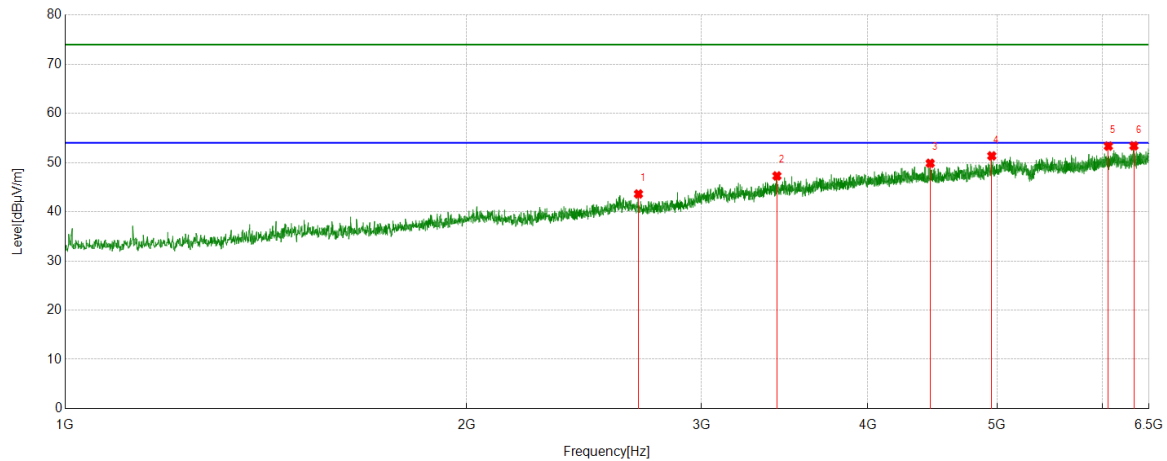


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2691.4614	37.32	6.30	43.62	74.00	-30.38	Horizontal
2	3418.2398	36.81	10.48	47.29	74.00	-26.71	Horizontal
3	4454.4318	36.08	13.78	49.86	74.00	-24.14	Horizontal
4	4954.3068	35.74	15.62	51.36	74.00	-22.64	Horizontal
5	6059.2574	35.31	18.04	53.35	74.00	-20.65	Horizontal
6	6332.2290	34.54	18.86	53.40	74.00	-20.60	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Vertical	PASS

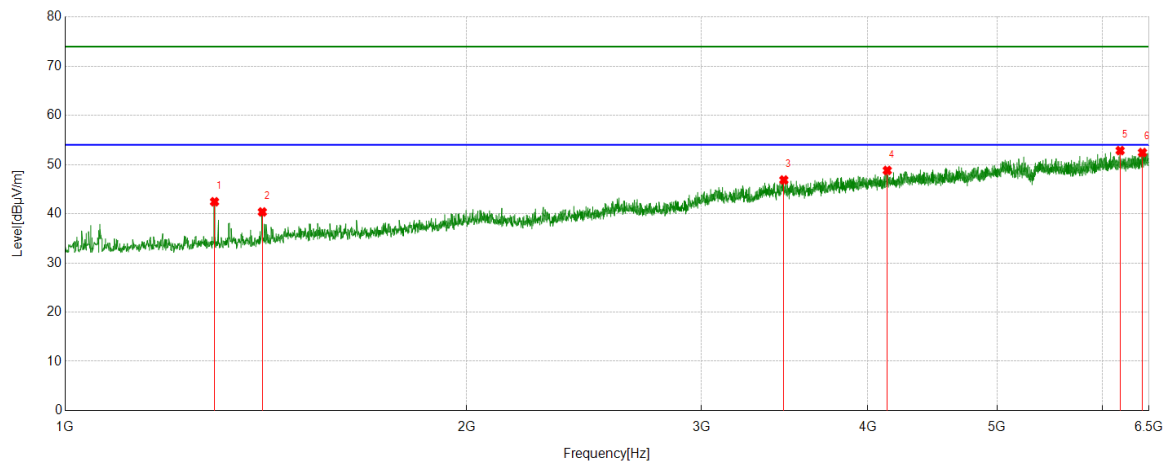


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1294.2868	44.32	-1.88	42.44	74.00	-31.56	Vertical
2	1405.6757	41.44	-1.07	40.37	74.00	-33.63	Vertical
3	3459.4949	36.01	10.86	46.87	74.00	-27.13	Vertical
4	4136.0795	35.79	13.02	48.81	74.00	-25.19	Vertical
5	6183.7105	34.53	18.32	52.85	74.00	-21.15	Vertical
6	6426.4283	33.06	19.38	52.44	74.00	-21.56	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Horizontal	PASS

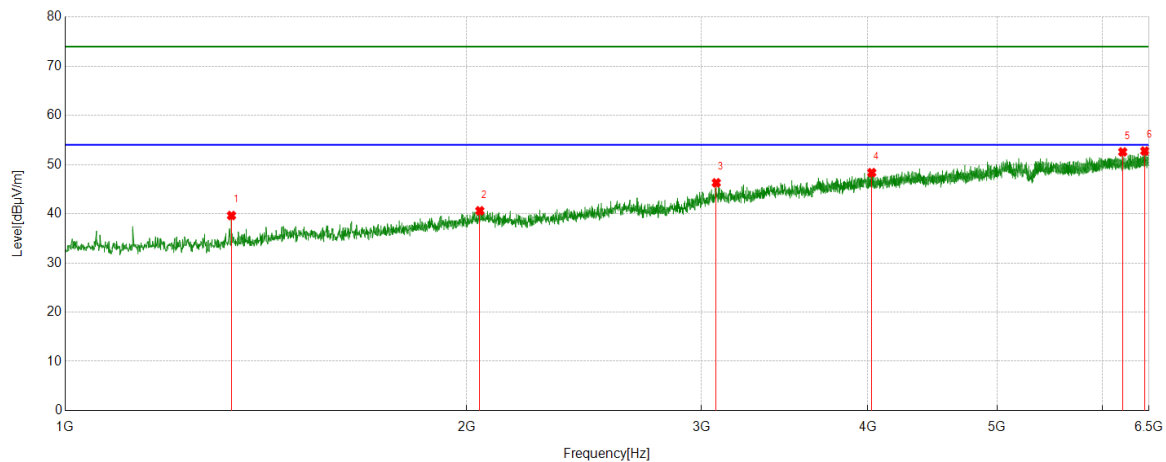


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1332.7916	41.43	-1.79	39.64	74.00	-34.36	Horizontal
2	2046.5058	36.42	4.18	40.60	74.00	-33.40	Horizontal
3	3078.5723	36.38	9.92	46.30	74.00	-27.70	Horizontal
4	4026.7533	35.52	12.84	48.36	74.00	-25.64	Horizontal
5	6211.2139	34.02	18.55	52.57	74.00	-21.43	Horizontal
6	6452.5566	33.13	19.63	52.76	74.00	-21.24	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Vertical	PASS

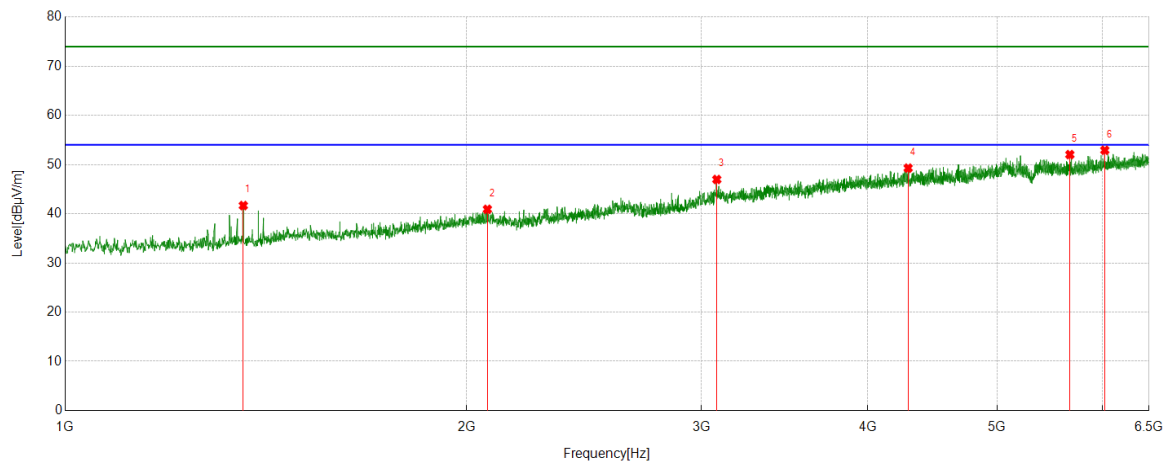


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1360.2950	42.90	-1.23	41.67	74.00	-32.33	Vertical
2	2073.3217	36.45	4.46	40.91	74.00	-33.09	Vertical
3	3081.3227	36.90	10.07	46.97	74.00	-27.03	Vertical
4	4288.0360	35.83	13.46	49.29	74.00	-24.71	Vertical
5	5669.3962	35.49	16.54	52.03	74.00	-21.97	Vertical
6	6022.1278	35.16	17.76	52.92	74.00	-21.08	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Horizontal	PASS

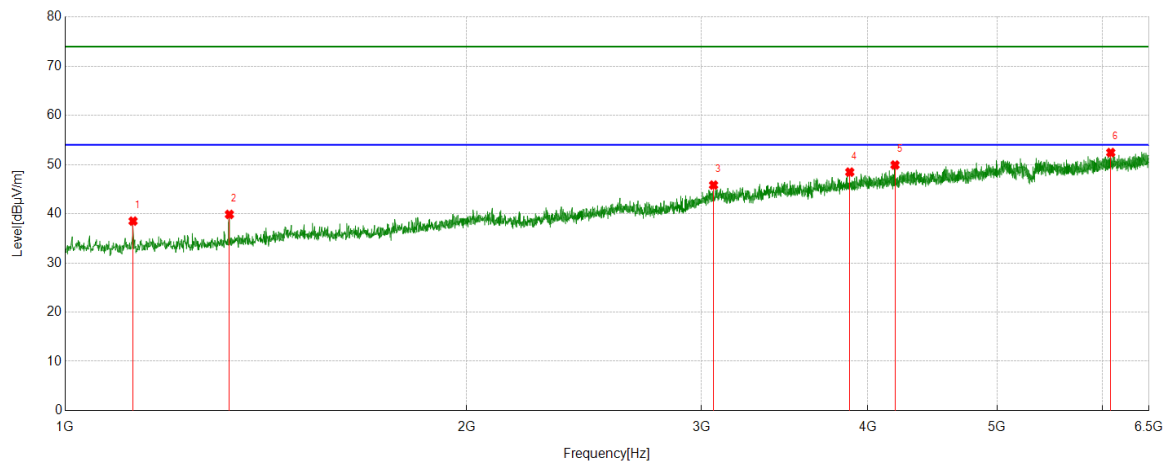


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	40.74	-2.23	38.51	74.00	-35.49	Horizontal
2	1327.9785	41.78	-1.91	39.87	74.00	-34.13	Horizontal
3	3064.1330	37.09	8.74	45.83	74.00	-28.17	Horizontal
4	3876.8596	36.18	12.29	48.47	74.00	-25.53	Horizontal
5	4191.7740	36.65	13.27	49.92	74.00	-24.08	Horizontal
6	6084.0105	34.22	18.22	52.44	74.00	-21.56	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Vertical	PASS

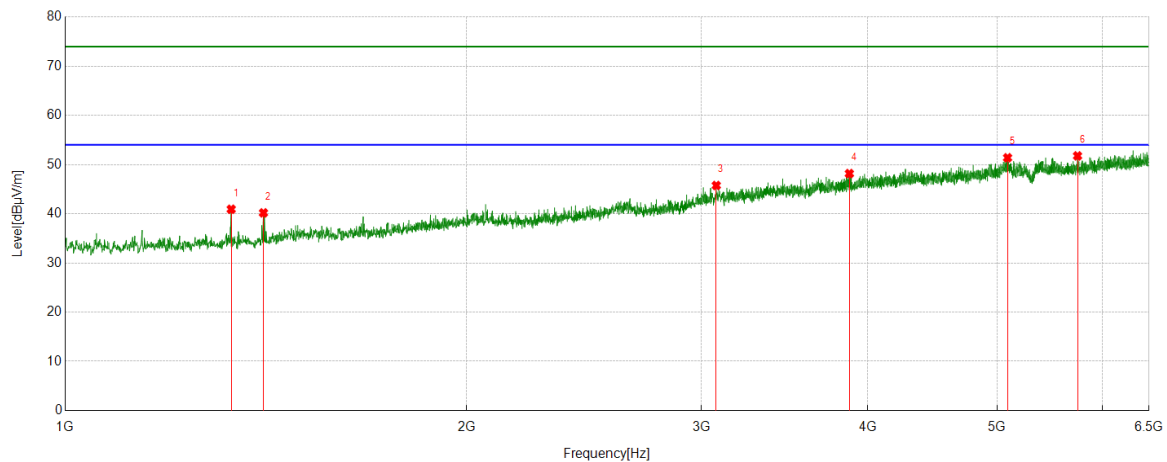


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1332.1040	42.74	-1.82	40.92	74.00	-33.08	Vertical
2	1408.4261	41.18	-1.00	40.18	74.00	-33.82	Vertical
3	3078.5723	35.83	9.92	45.75	74.00	-28.25	Vertical
4	3874.1093	36.02	12.15	48.17	74.00	-25.83	Vertical
5	5091.1364	34.88	16.51	51.39	74.00	-22.61	Vertical
6	5745.0306	34.82	16.95	51.77	74.00	-22.23	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Horizontal	PASS

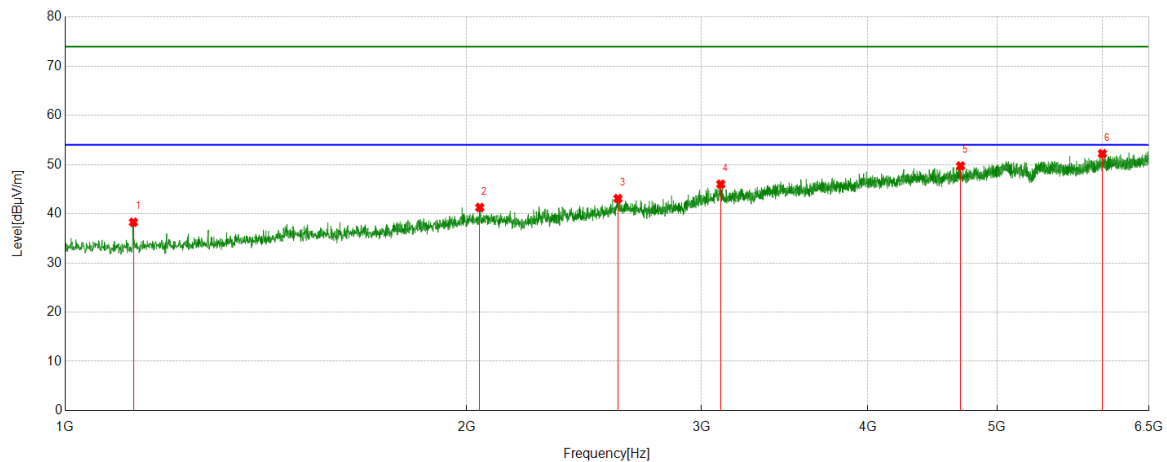

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1125.1406	40.52	-2.25	38.27	74.00	-35.73	Horizontal
2	2046.5058	37.10	4.18	41.28	74.00	-32.72	Horizontal
3	2597.9497	36.28	6.81	43.09	74.00	-30.91	Horizontal
4	3102.6378	35.85	10.16	46.01	74.00	-27.99	Horizontal
5	4694.3993	35.06	14.65	49.71	74.00	-24.29	Horizontal
6	5997.3747	34.40	17.83	52.23	74.00	-21.77	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Vertical	PASS

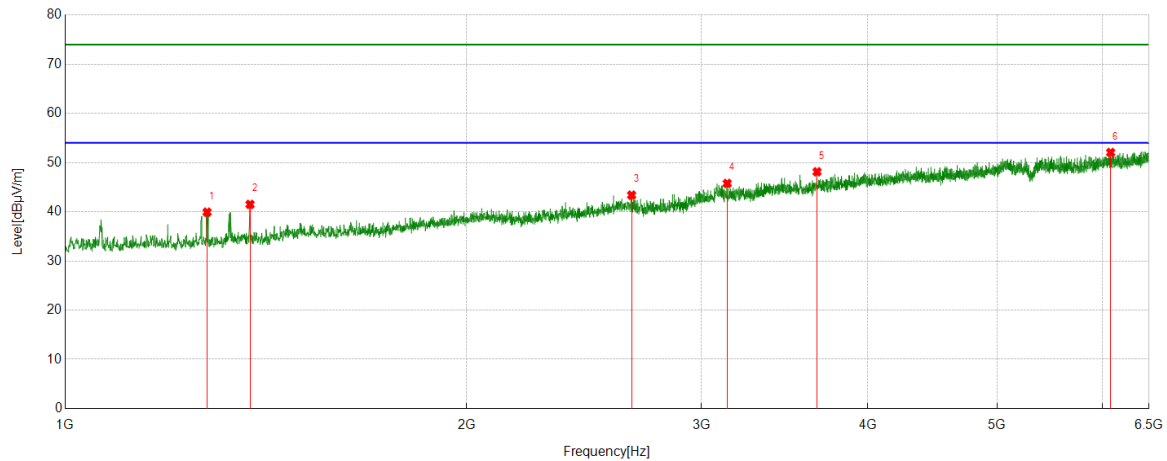


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1277.7847	41.53	-1.61	39.92	74.00	-34.08	Vertical
2	1376.1095	42.63	-1.13	41.50	74.00	-32.50	Vertical
3	2659.8325	36.28	7.10	43.38	74.00	-30.62	Vertical
4	3137.0171	36.36	9.40	45.76	74.00	-28.24	Vertical
5	3663.7080	36.53	11.60	48.13	74.00	-25.87	Vertical
6	6083.3229	33.86	18.19	52.05	74.00	-21.95	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Horizontal	PASS

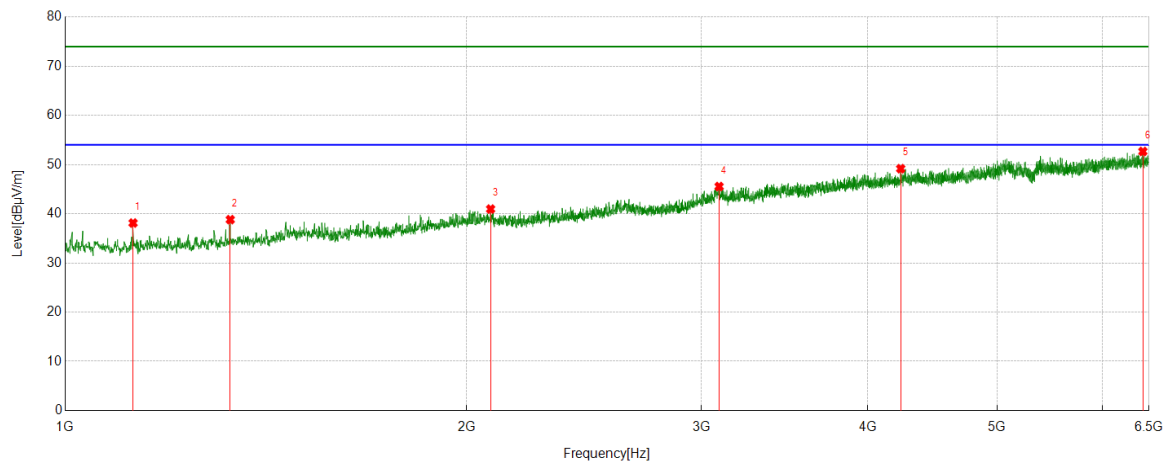


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	40.35	-2.23	38.12	74.00	-35.88	Horizontal
2	1330.0413	40.70	-1.89	38.81	74.00	-35.19	Horizontal
3	2085.0106	36.70	4.26	40.96	74.00	-33.04	Horizontal
4	3093.6992	35.63	9.91	45.54	74.00	-28.46	Horizontal
5	4233.0291	35.79	13.38	49.17	74.00	-24.83	Horizontal
6	6431.2414	33.21	19.46	52.67	74.00	-21.33	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Vertical	PASS

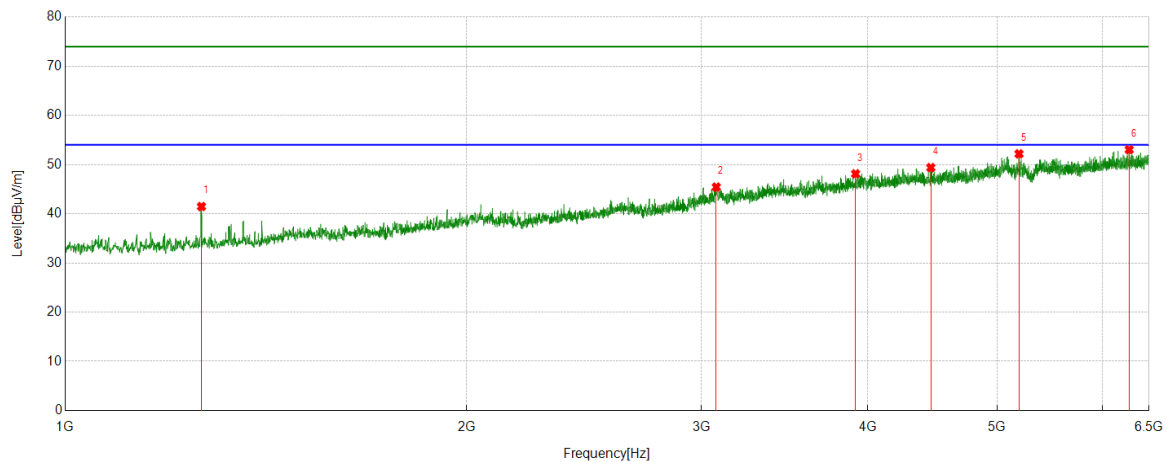


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1265.4082	42.96	-1.49	41.47	74.00	-32.53	Vertical
2	3078.5723	35.50	9.92	45.42	74.00	-28.58	Vertical
3	3916.0520	36.01	12.11	48.12	74.00	-25.88	Vertical
4	4459.2449	35.69	13.70	49.39	74.00	-24.61	Vertical
5	5192.8991	35.89	16.29	52.18	74.00	-21.82	Vertical
6	6281.3477	34.27	18.76	53.03	74.00	-20.97	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Horizontal	PASS

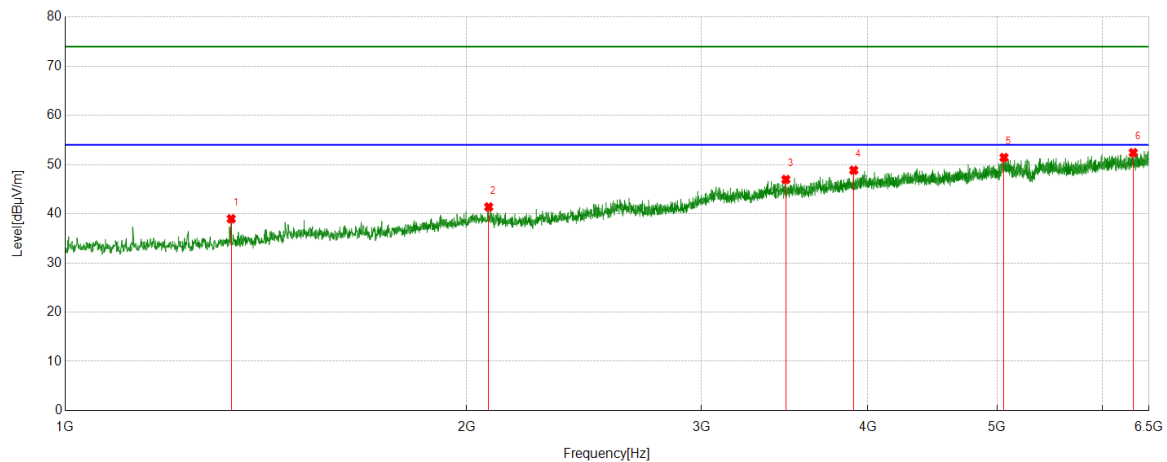


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1332.1040	40.79	-1.82	38.97	74.00	-35.03	Horizontal
2	2078.1348	37.11	4.28	41.39	74.00	-32.61	Horizontal
3	3471.8715	36.05	10.92	46.97	74.00	-27.03	Horizontal
4	3903.6755	36.75	12.10	48.85	74.00	-25.15	Horizontal
5	5060.1950	35.13	16.30	51.43	74.00	-22.57	Horizontal
6	6324.6656	33.48	18.94	52.42	74.00	-21.58	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Vertical	PASS

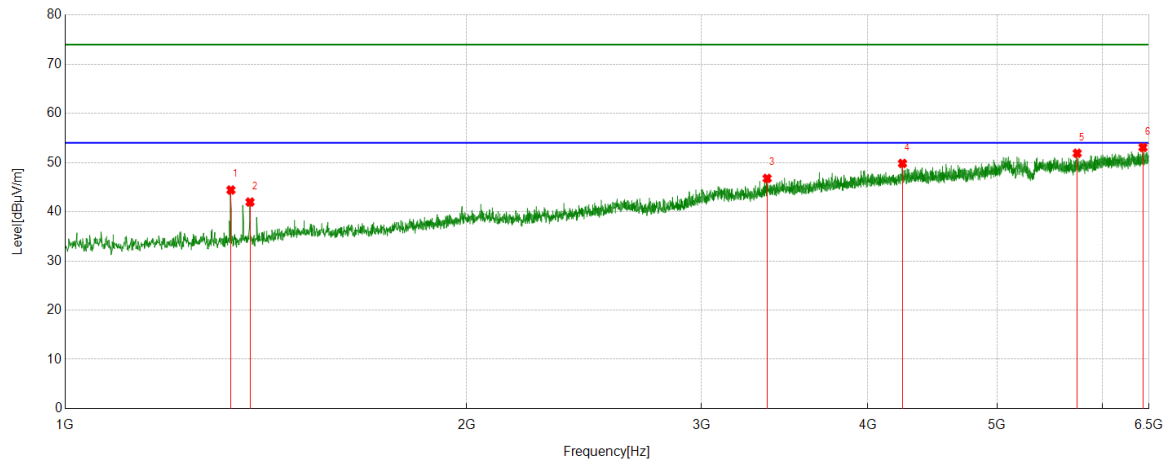


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1331.4164	46.26	-1.84	44.42	74.00	-29.58	Vertical
2	1376.1095	43.10	-1.13	41.97	74.00	-32.03	Vertical
3	3361.1701	36.39	10.39	46.78	74.00	-27.22	Vertical
4	4246.0933	36.14	13.69	49.83	74.00	-24.17	Vertical
5	5741.5927	35.02	16.88	51.90	74.00	-22.10	Vertical
6	6432.6166	33.62	19.47	53.09	74.00	-20.91	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Horizontal	PASS

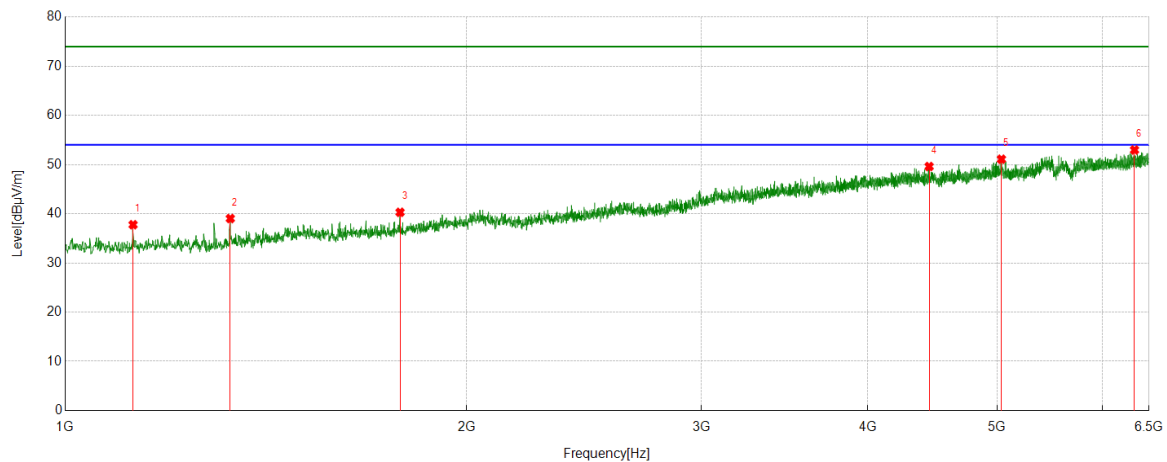


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	40.08	-2.31	37.77	74.00	-36.23	Horizontal
2	1330.0413	40.85	-1.82	39.03	74.00	-34.97	Horizontal
3	1783.1604	38.60	1.70	40.30	74.00	-33.70	Horizontal
4	4446.1808	35.34	14.27	49.61	74.00	-24.39	Horizontal
5	5037.5047	34.88	16.21	51.09	74.00	-22.91	Horizontal
6	6339.1049	33.97	19.00	52.97	74.00	-21.03	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Vertical	PASS

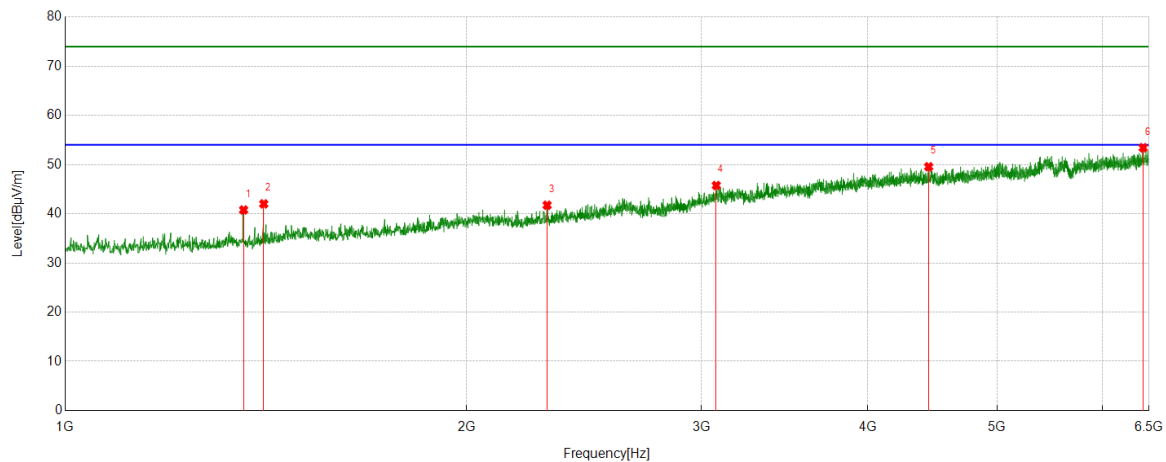


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1360.9826	42.16	-1.38	40.78	74.00	-33.22	Vertical
2	1409.1136	43.12	-1.11	42.01	74.00	-31.99	Vertical
3	2298.8499	37.26	4.48	41.74	74.00	-32.26	Vertical
4	3078.5723	36.10	9.65	45.75	74.00	-28.25	Vertical
5	4442.7428	35.44	14.12	49.56	74.00	-24.44	Vertical
6	6434.6793	33.89	19.53	53.42	74.00	-20.58	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Horizontal	PASS

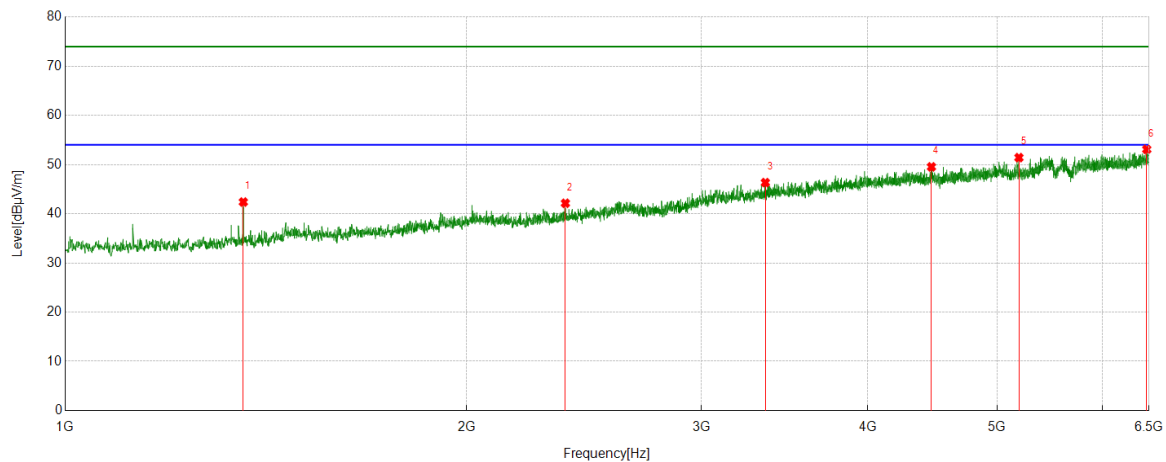

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1360.2950	43.79	-1.40	42.39	74.00	-31.61	Horizontal
2	2372.4216	37.34	4.80	42.14	74.00	-31.86	Horizontal
3	3350.8564	36.07	10.27	46.34	74.00	-27.66	Horizontal
4	4464.0580	35.24	14.30	49.54	74.00	-24.46	Horizontal
5	5192.2115	36.21	15.21	51.42	74.00	-22.58	Horizontal
6	6474.5593	33.19	19.90	53.09	74.00	-20.91	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Vertical	PASS

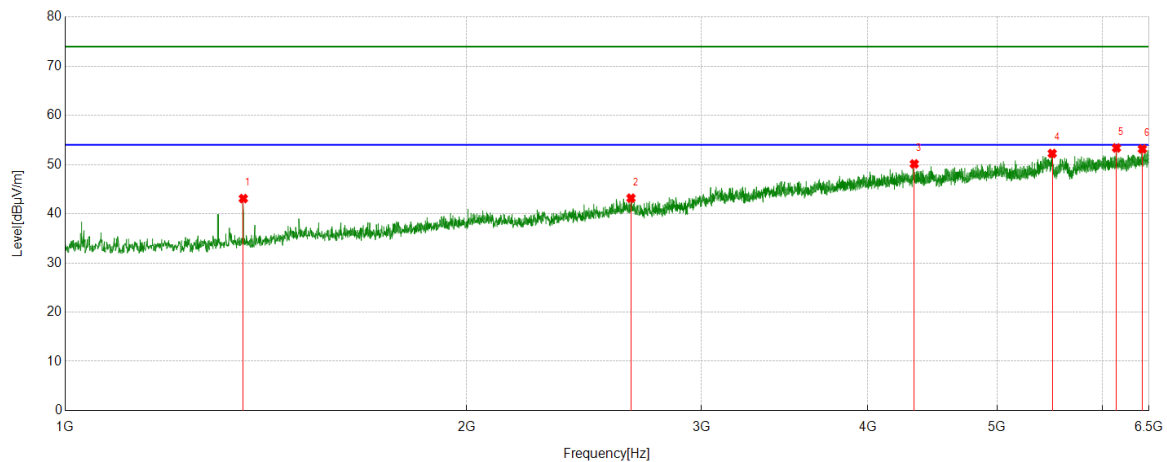


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1360.2950	44.49	-1.40	43.09	74.00	-30.91	Vertical
2	2657.0821	36.01	7.16	43.17	74.00	-30.83	Vertical
3	4333.4167	36.59	13.55	50.14	74.00	-23.86	Vertical
4	5499.5624	34.44	17.82	52.26	74.00	-21.74	Vertical
5	6144.5181	34.90	18.48	53.38	74.00	-20.62	Vertical
6	6425.7407	33.69	19.48	53.17	74.00	-20.83	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Horizontal	PASS

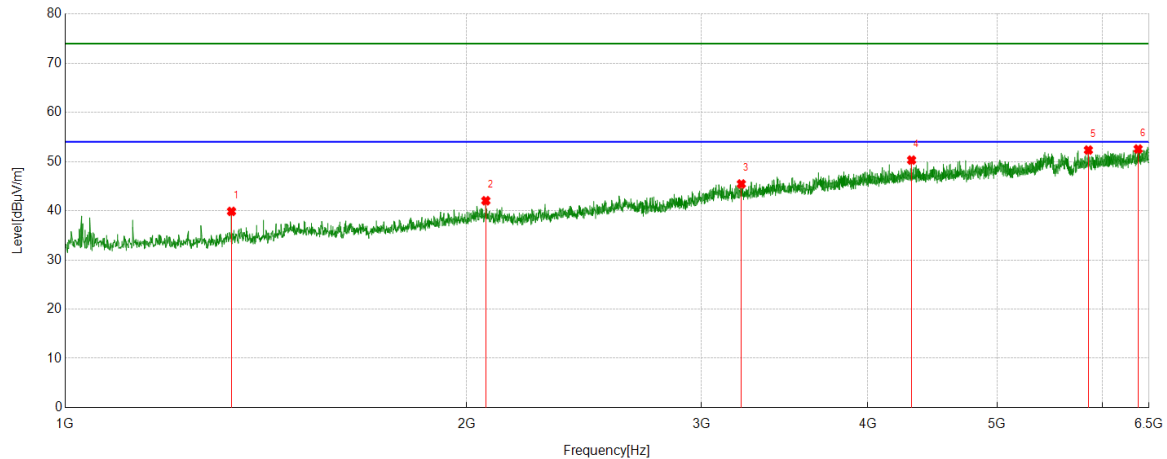


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1332.7916	41.63	-1.76	39.87	74.00	-34.13	Horizontal
2	2067.8210	37.65	4.39	42.04	74.00	-31.96	Horizontal
3	3214.7143	36.35	9.10	45.45	74.00	-28.55	Horizontal
4	4313.4767	36.92	13.38	50.30	74.00	-23.70	Horizontal
5	5853.6692	34.23	18.11	52.34	74.00	-21.66	Horizontal
6	6378.9849	32.96	19.60	52.56	74.00	-21.44	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Vertical	PASS

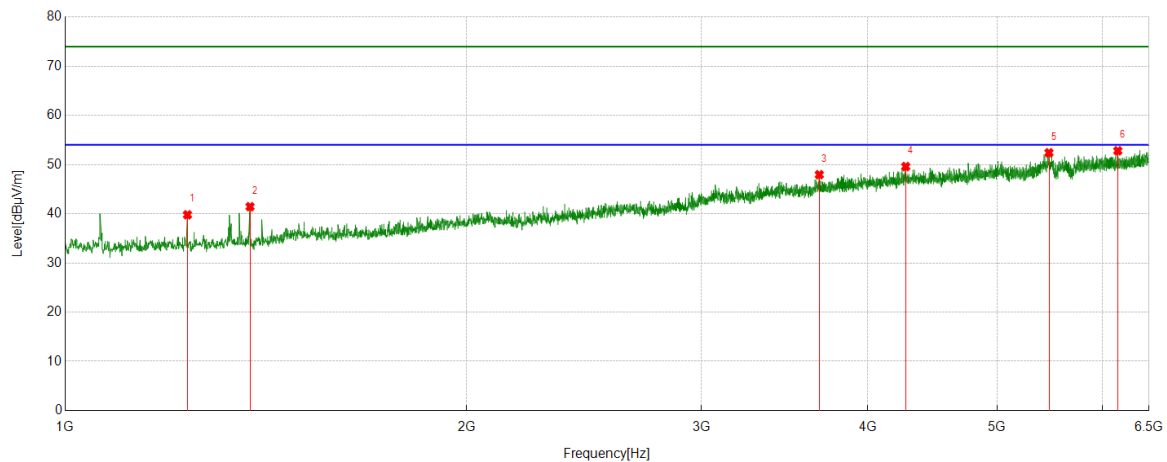


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1235.1544	41.68	-1.89	39.79	74.00	-34.21	Vertical
2	1376.1095	42.75	-1.31	41.44	74.00	-32.56	Vertical
3	3678.1473	35.30	12.65	47.95	74.00	-26.05	Vertical
4	4270.1588	35.26	14.34	49.60	74.00	-24.40	Vertical
5	5468.6211	34.55	17.86	52.41	74.00	-21.59	Vertical
6	6158.9574	34.34	18.46	52.80	74.00	-21.20	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Horizontal	PASS

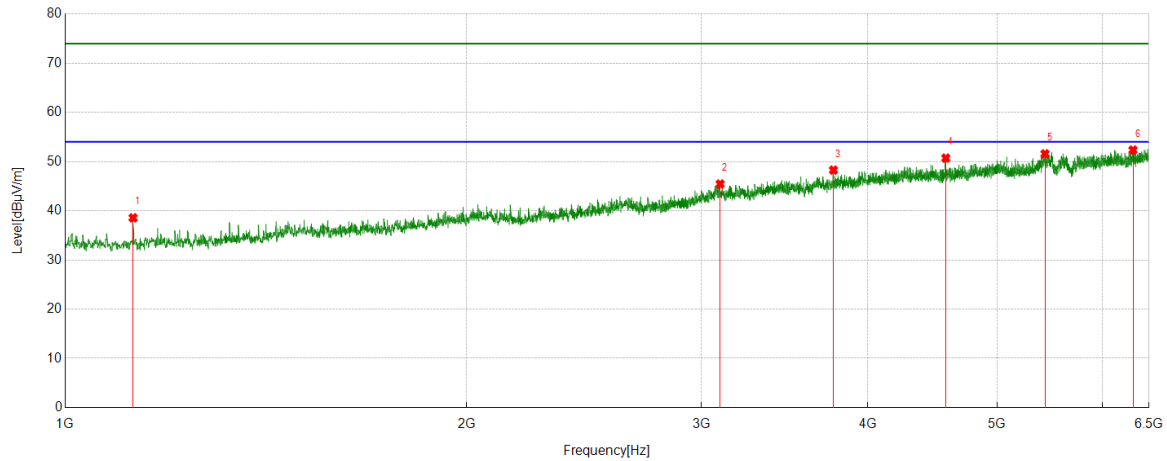


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1124.4531	40.88	-2.31	38.57	74.00	-35.43	Horizontal
2	3099.1999	36.03	9.41	45.44	74.00	-28.56	Horizontal
3	3768.9086	36.36	11.91	48.27	74.00	-25.73	Horizontal
4	4576.1345	36.59	14.12	50.71	74.00	-23.29	Horizontal
5	5430.8038	33.67	17.91	51.58	74.00	-22.42	Horizontal
6	6322.6028	33.13	19.22	52.35	74.00	-21.65	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Vertical	PASS

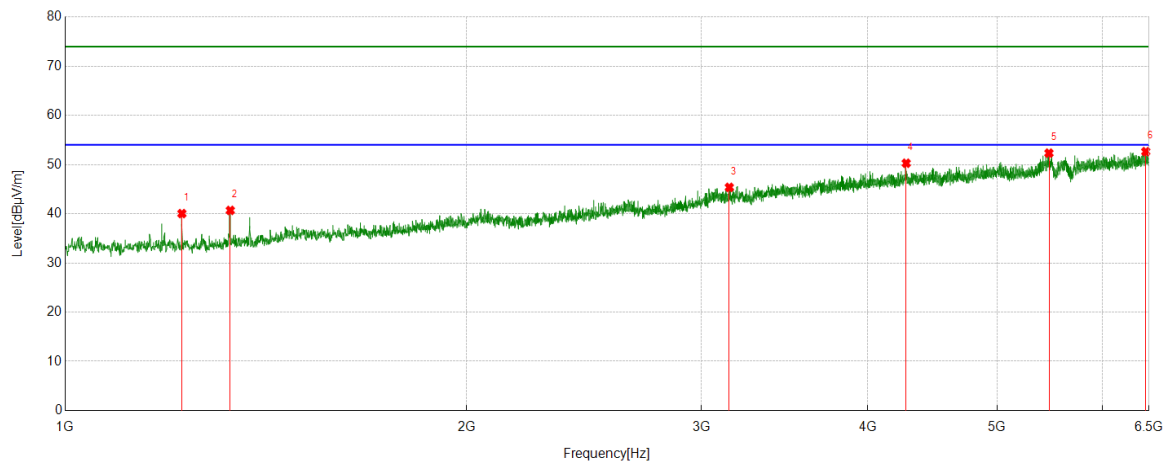


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1223.4654	41.93	-1.89	40.04	74.00	-33.96	Vertical
2	1330.0413	42.51	-1.82	40.69	74.00	-33.31	Vertical
3	3148.7061	36.11	9.26	45.37	74.00	-28.63	Vertical
4	4273.5967	36.19	14.09	50.28	74.00	-23.72	Vertical
5	5468.6211	34.47	17.86	52.33	74.00	-21.67	Vertical
6	6463.5579	32.82	19.82	52.64	74.00	-21.36	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Horizontal	PASS

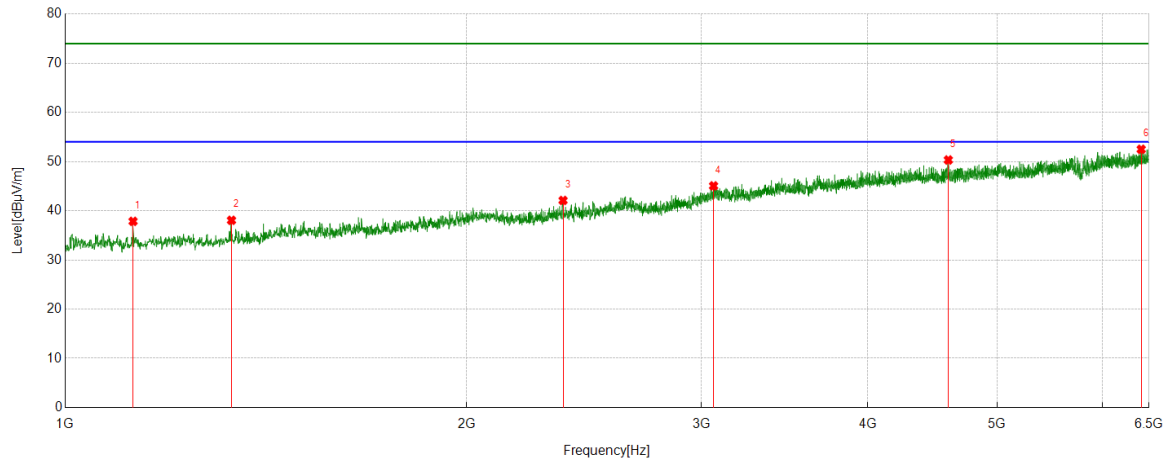

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1124.4531	40.28	-2.43	37.85	74.00	-36.15	Horizontal
2	1332.7916	39.75	-1.69	38.06	74.00	-35.94	Horizontal
3	2362.7953	37.81	4.29	42.10	74.00	-31.90	Horizontal
4	3064.1330	36.51	8.55	45.06	74.00	-28.94	Horizontal
5	4596.0745	36.36	13.97	50.33	74.00	-23.67	Horizontal
6	6412.6766	33.72	18.78	52.50	74.00	-21.50	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Vertical	PASS

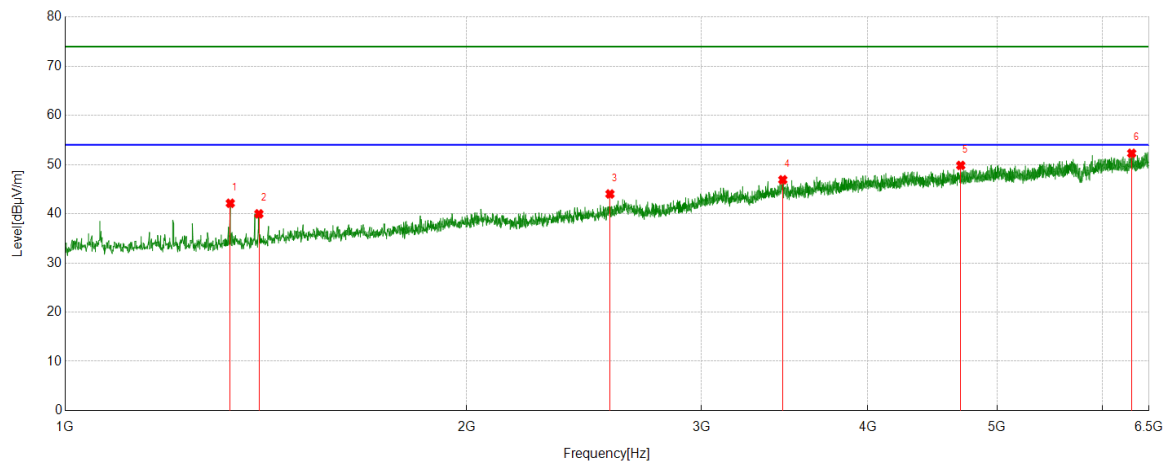


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1330.0413	43.84	-1.71	42.13	74.00	-31.87	Vertical
2	1397.4247	41.16	-1.18	39.98	74.00	-34.02	Vertical
3	2562.1953	38.35	5.67	44.02	74.00	-29.98	Vertical
4	3453.3067	35.56	11.35	46.91	74.00	-27.09	Vertical
5	4695.7745	35.59	14.24	49.83	74.00	-24.17	Vertical
6	6308.1635	33.30	18.99	52.29	74.00	-21.71	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Horizontal	PASS

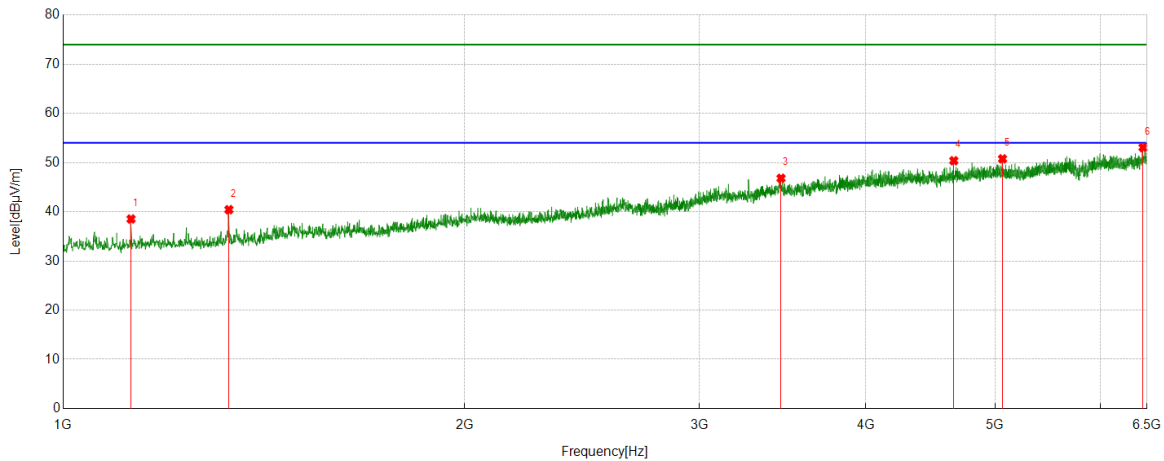


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	40.96	-2.43	38.53	74.00	-35.47	Horizontal
2	1331.4164	42.13	-1.70	40.43	74.00	-33.57	Horizontal
3	3454.6818	35.61	11.20	46.81	74.00	-27.19	Horizontal
4	4655.8945	36.23	14.15	50.38	74.00	-23.62	Horizontal
5	5064.3205	35.78	14.98	50.76	74.00	-23.24	Horizontal
6	6455.3069	33.33	19.74	53.07	74.00	-20.93	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Vertical	PASS

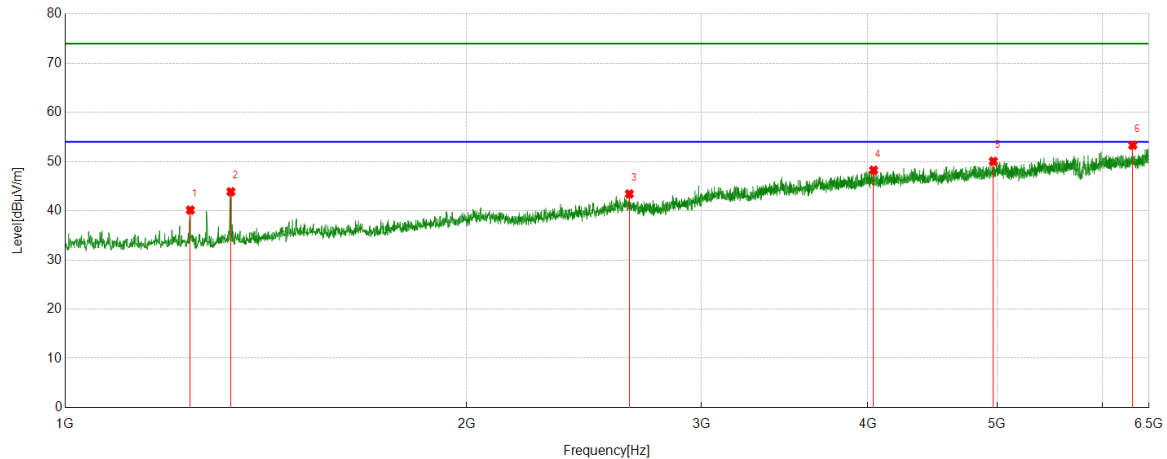


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1241.3427	42.04	-1.90	40.14	74.00	-33.86	Vertical
2	1331.4164	45.57	-1.70	43.87	74.00	-30.13	Vertical
3	2649.5187	36.56	6.87	43.43	74.00	-30.57	Vertical
4	4039.8175	35.27	12.98	48.25	74.00	-25.75	Vertical
5	4967.3709	35.24	14.82	50.06	74.00	-23.94	Vertical
6	6319.8525	34.17	19.16	53.33	74.00	-20.67	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Horizontal	PASS

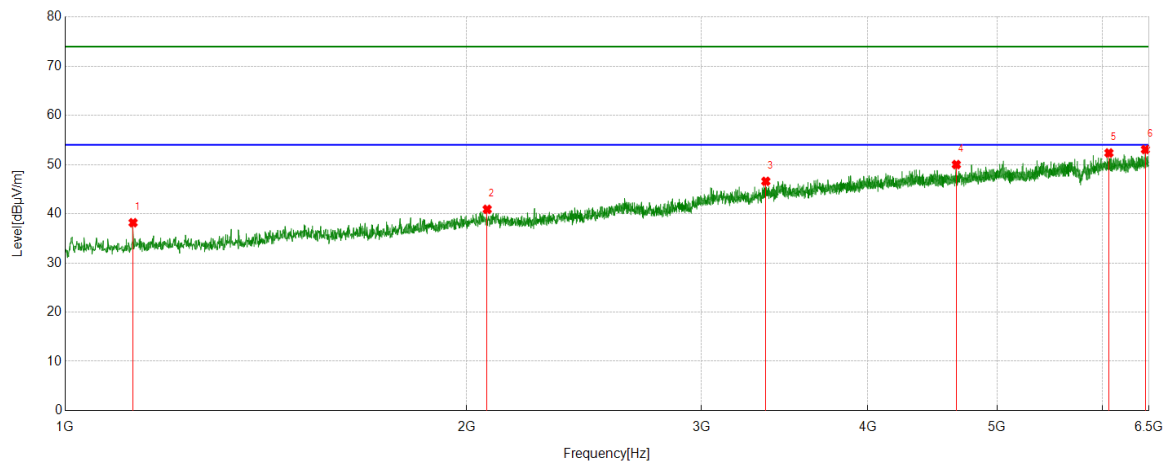


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1124.4531	40.61	-2.43	38.18	74.00	-35.82	Horizontal
2	2072.6341	36.77	4.13	40.90	74.00	-33.10	Horizontal
3	3353.6067	36.30	10.30	46.60	74.00	-27.40	Horizontal
4	4660.0200	35.72	14.28	50.00	74.00	-24.00	Horizontal
5	6065.4457	34.28	18.08	52.36	74.00	-21.64	Horizontal
6	6459.4324	33.16	19.91	53.07	74.00	-20.93	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Vertical	PASS

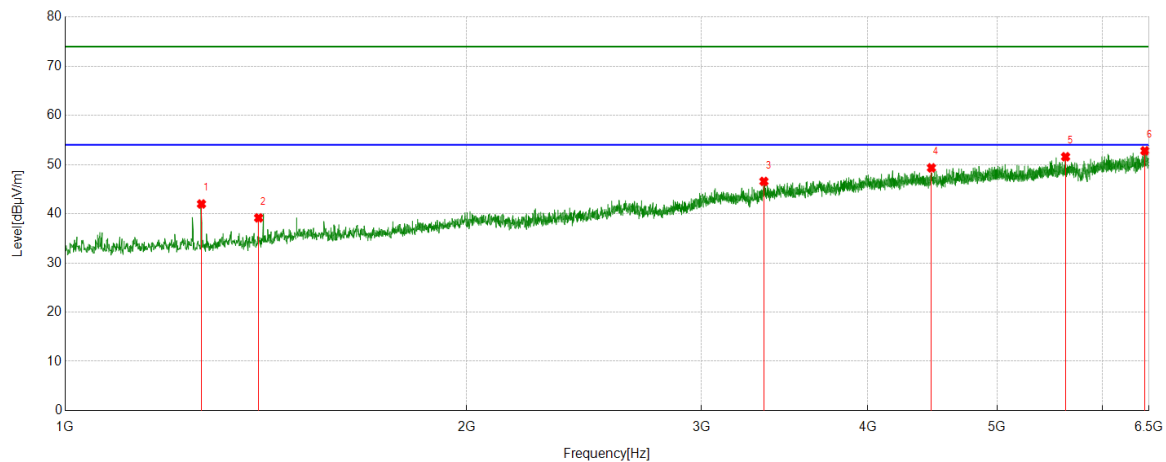

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1265.4082	44.07	-2.08	41.99	74.00	-32.01	Vertical
2	1396.7371	40.36	-1.20	39.16	74.00	-34.84	Vertical
3	3342.6053	36.28	10.30	46.58	74.00	-27.42	Vertical
4	4464.0580	35.52	13.82	49.34	74.00	-24.66	Vertical
5	5627.4534	35.28	16.31	51.59	74.00	-22.41	Vertical
6	6453.2442	33.14	19.66	52.80	74.00	-21.20	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Horizontal	PASS

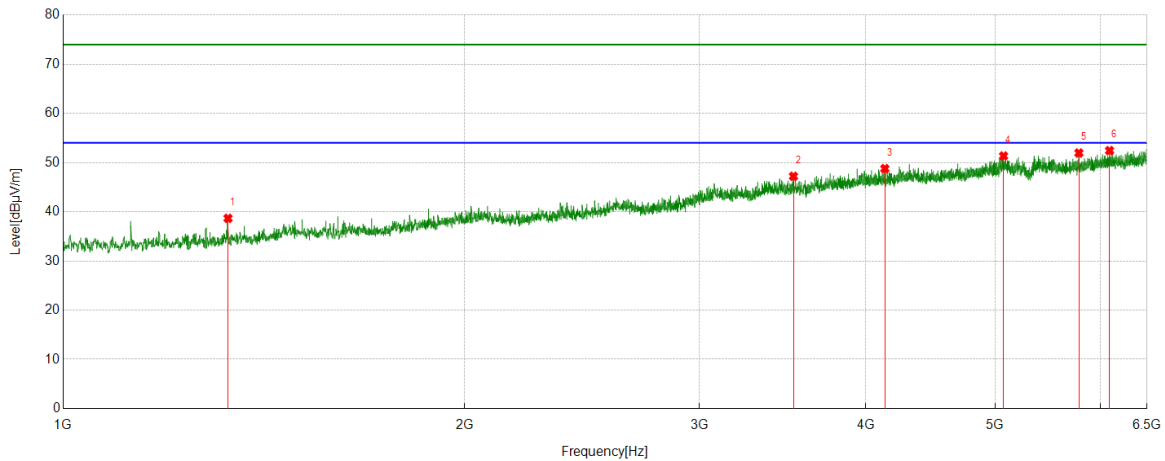


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1329.3537	40.57	-1.90	38.67	74.00	-35.33	Horizontal
2	3529.6287	36.07	11.14	47.21	74.00	-26.79	Horizontal
3	4133.3292	35.68	13.09	48.77	74.00	-25.23	Horizontal
4	5073.2592	34.96	16.38	51.34	74.00	-22.66	Horizontal
5	5778.7223	35.11	16.84	51.95	74.00	-22.05	Horizontal
6	6092.2615	34.02	18.41	52.43	74.00	-21.57	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Vertical	PASS

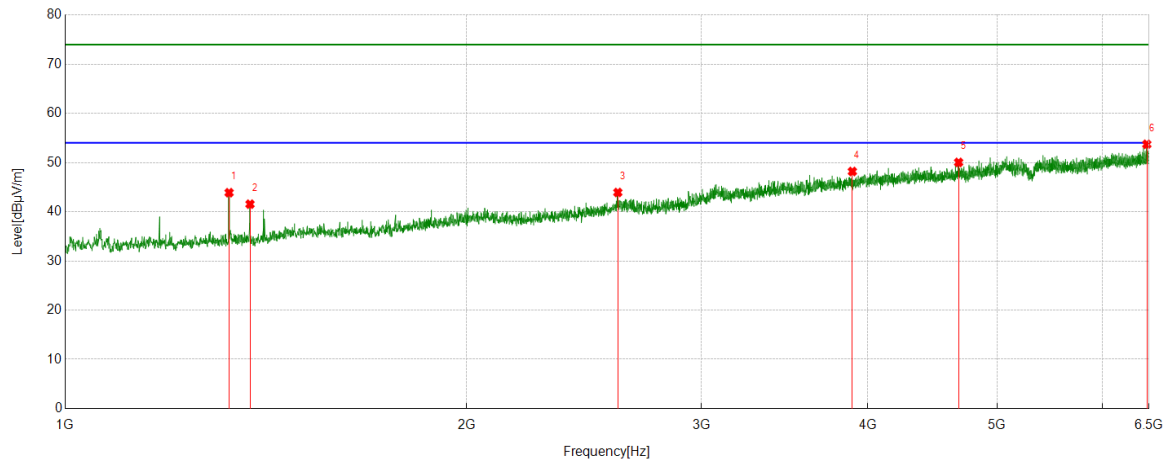


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1327.2909	45.81	-1.93	43.88	74.00	-30.12	Vertical
2	1376.1095	42.68	-1.13	41.55	74.00	-32.45	Vertical
3	2597.2622	37.14	6.79	43.93	74.00	-30.07	Vertical
4	3894.0493	36.12	12.07	48.19	74.00	-25.81	Vertical
5	4678.5848	35.66	14.38	50.04	74.00	-23.96	Vertical
6	6475.2469	34.06	19.66	53.72	74.00	-20.28	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Horizontal	PASS

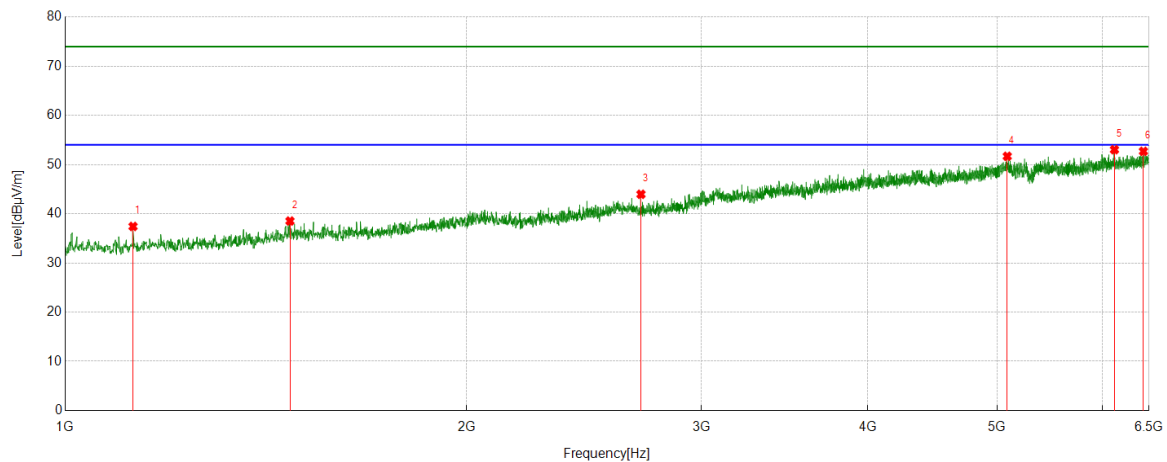

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	39.65	-2.23	37.42	74.00	-36.58	Horizontal
2	1474.4343	38.51	0.01	38.52	74.00	-35.48	Horizontal
3	2703.1504	37.70	6.26	43.96	74.00	-30.04	Horizontal
4	5088.3860	35.22	16.47	51.69	74.00	-22.31	Horizontal
5	6123.2029	34.46	18.57	53.03	74.00	-20.97	Horizontal
6	6437.4297	33.19	19.51	52.70	74.00	-21.30	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.


6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Vertical	PASS

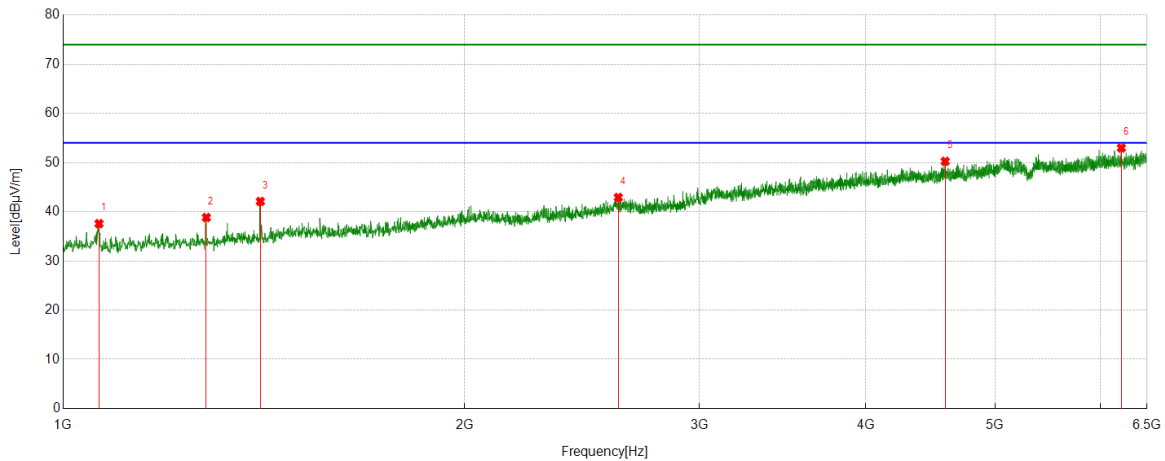


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1063.9455	39.42	-1.83	37.59	74.00	-36.41	Vertical
2	1280.5351	40.51	-1.68	38.83	74.00	-35.17	Vertical
3	1405.6757	43.17	-1.07	42.10	74.00	-31.90	Vertical
4	2608.2635	36.42	6.50	42.92	74.00	-31.08	Vertical
5	4587.1359	35.98	14.27	50.25	74.00	-23.75	Vertical
6	6218.0898	34.55	18.42	52.97	74.00	-21.03	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Horizontal	PASS

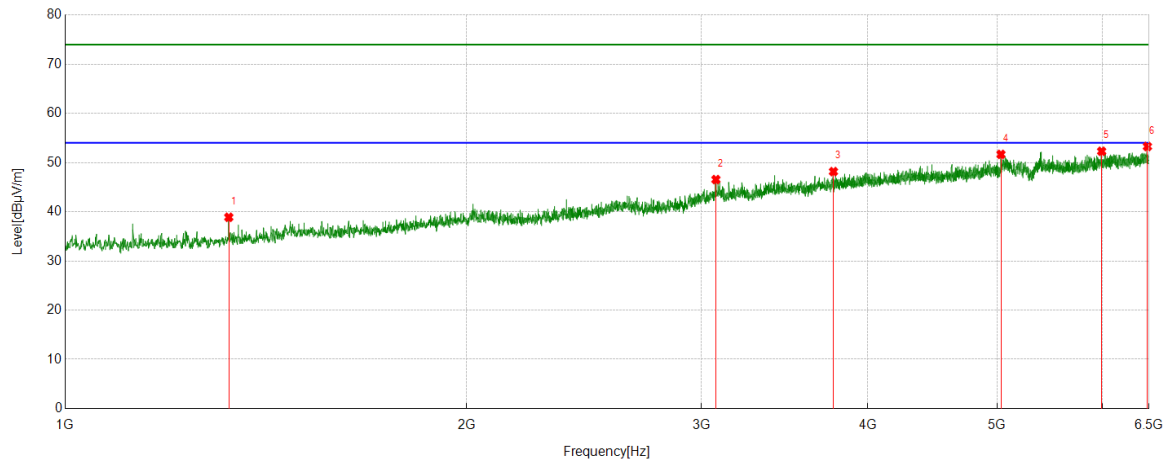


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1326.6033	40.81	-1.93	38.88	74.00	-35.12	Horizontal
2	3076.5096	36.88	9.67	46.55	74.00	-27.45	Horizontal
3	3768.9086	36.18	11.99	48.17	74.00	-25.83	Horizontal
4	5033.3792	35.97	15.70	51.67	74.00	-22.33	Horizontal
5	5989.1236	34.43	17.87	52.30	74.00	-21.70	Horizontal
6	6482.1228	33.62	19.65	53.27	74.00	-20.73	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Vertical	PASS

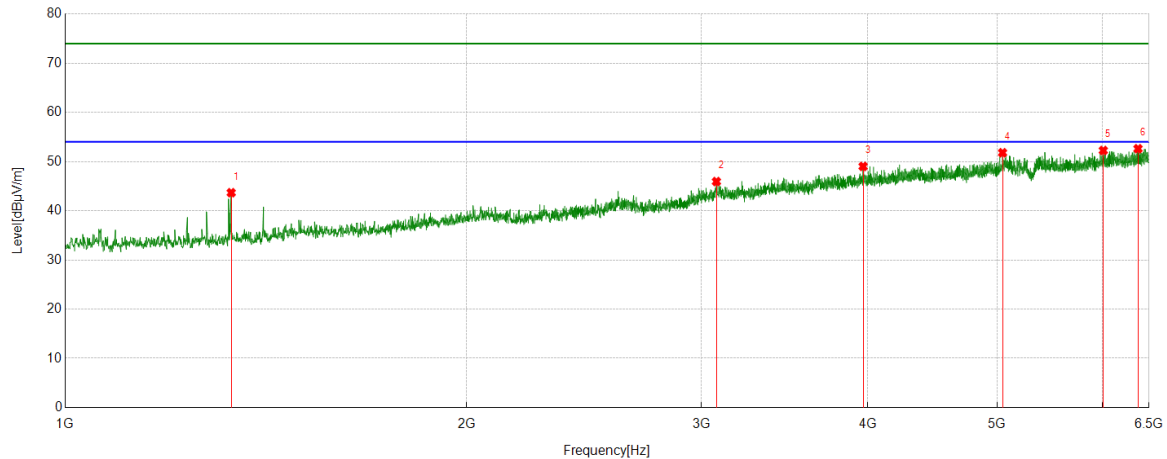


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1332.1040	45.49	-1.82	43.67	74.00	-30.33	Vertical
2	3079.2599	35.93	10.01	45.94	74.00	-28.06	Vertical
3	3966.9334	36.12	12.90	49.02	74.00	-24.98	Vertical
4	5047.1309	35.68	16.12	51.80	74.00	-22.20	Vertical
5	6006.3133	34.43	17.83	52.26	74.00	-21.74	Vertical
6	6377.6097	33.35	19.27	52.62	74.00	-21.38	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Horizontal	PASS

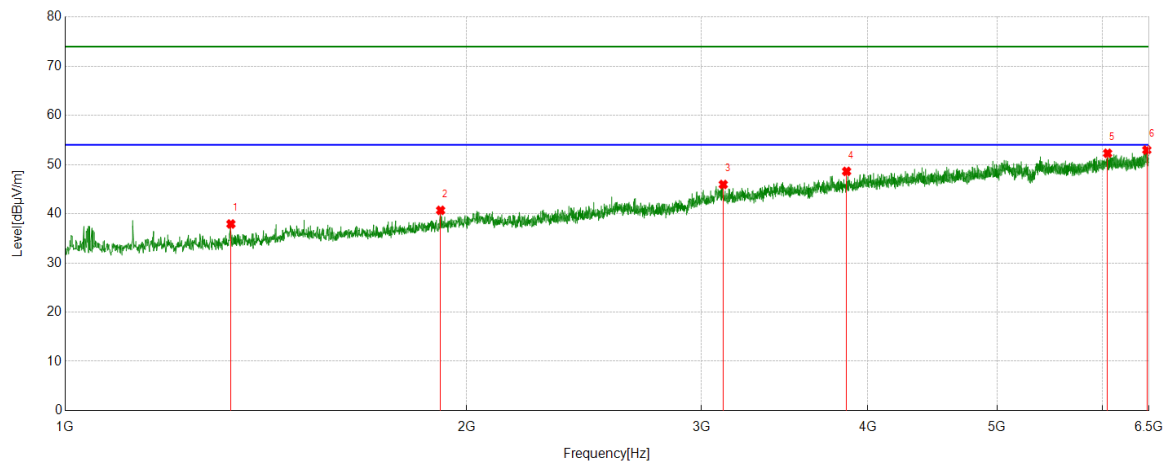


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1331.4164	39.76	-1.84	37.92	74.00	-36.08	Horizontal
2	1912.4266	38.25	2.45	40.70	74.00	-33.30	Horizontal
3	3115.7020	36.03	9.92	45.95	74.00	-28.05	Horizontal
4	3855.5444	36.30	12.32	48.62	74.00	-25.38	Horizontal
5	6051.0064	34.21	18.09	52.30	74.00	-21.70	Horizontal
6	6475.2469	33.30	19.66	52.96	74.00	-21.04	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Vertical	PASS

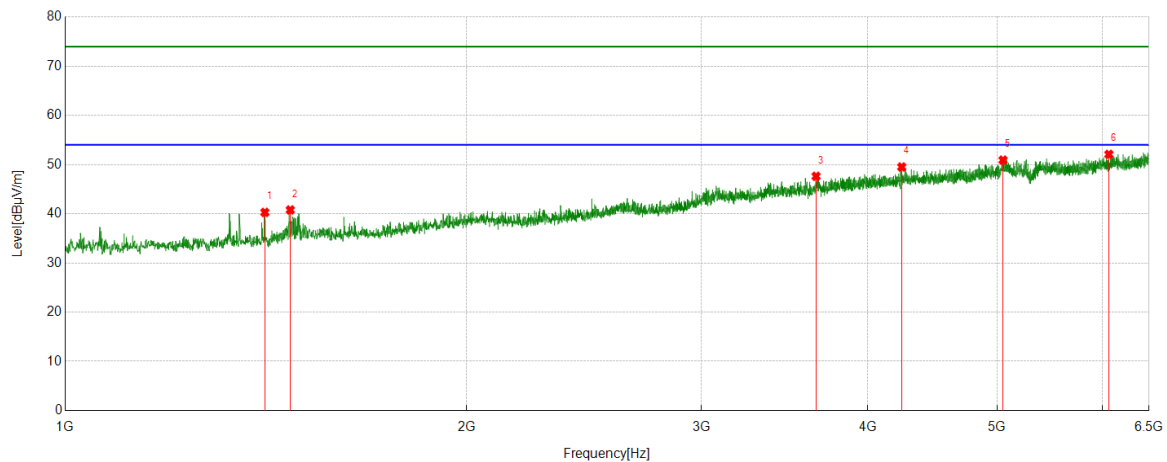


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1411.8640	41.24	-0.96	40.28	74.00	-33.72	Vertical
2	1475.1219	40.79	-0.01	40.78	74.00	-33.22	Vertical
3	3657.5197	36.04	11.58	47.62	74.00	-26.38	Vertical
4	4240.5926	35.76	13.76	49.52	74.00	-24.48	Vertical
5	5051.2564	34.70	16.21	50.91	74.00	-23.09	Vertical
6	6064.7581	33.95	18.13	52.08	74.00	-21.92	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Horizontal	PASS

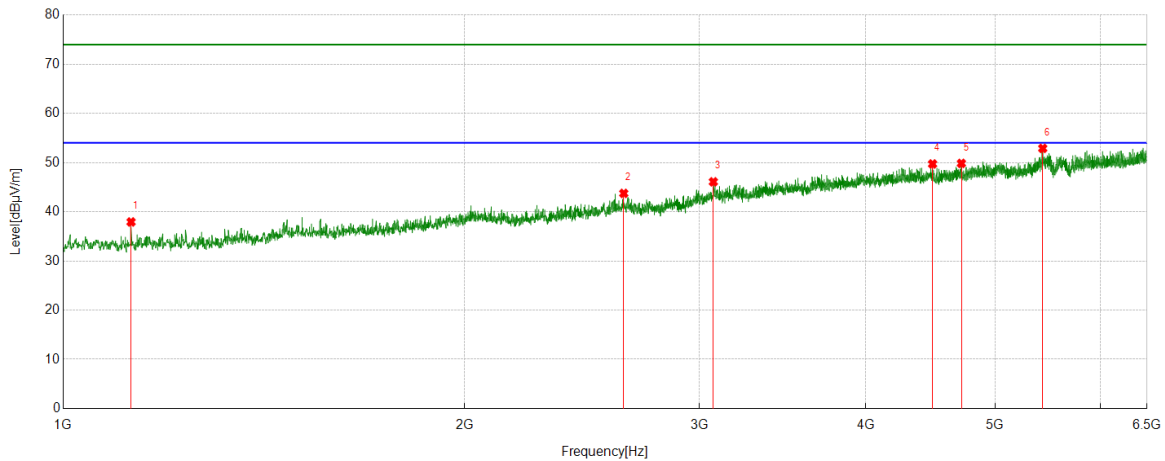


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	40.24	-2.31	37.93	74.00	-36.07	Horizontal
2	2633.0166	37.10	6.64	43.74	74.00	-30.26	Horizontal
3	3073.7592	36.70	9.39	46.09	74.00	-27.91	Horizontal
4	4488.1235	35.68	14.04	49.72	74.00	-24.28	Horizontal
5	4717.0896	35.24	14.60	49.84	74.00	-24.16	Horizontal
6	5428.7411	35.06	17.83	52.89	74.00	-21.11	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Vertical	PASS

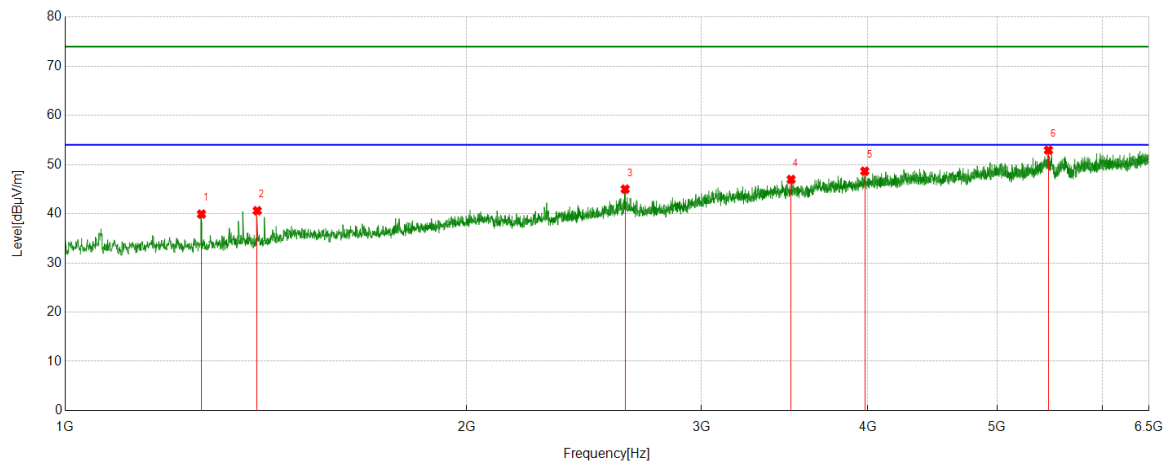


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1265.4082	41.75	-1.82	39.93	74.00	-34.07	Vertical
2	1393.2992	41.83	-1.21	40.62	74.00	-33.38	Vertical
3	2630.2663	38.37	6.64	45.01	74.00	-28.99	Vertical
4	3503.5004	36.05	10.93	46.98	74.00	-27.02	Vertical
5	3978.6223	35.45	13.21	48.66	74.00	-25.34	Vertical
6	5463.1204	35.06	17.87	52.93	74.00	-21.07	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Horizontal	PASS

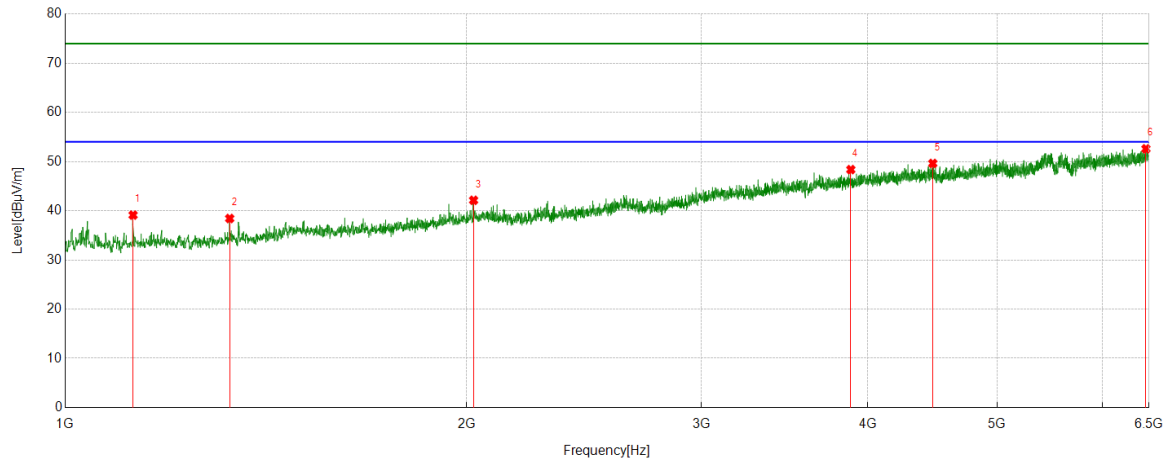


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1124.4531	41.43	-2.31	39.12	74.00	-34.88	Horizontal
2	1328.6661	40.27	-1.84	38.43	74.00	-35.57	Horizontal
3	2024.5031	38.10	4.03	42.13	74.00	-31.87	Horizontal
4	3883.7355	36.11	12.26	48.37	74.00	-25.63	Horizontal
5	4474.3718	35.17	14.46	49.63	74.00	-24.37	Horizontal
6	6465.6207	32.77	19.83	52.60	74.00	-21.40	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Vertical	PASS

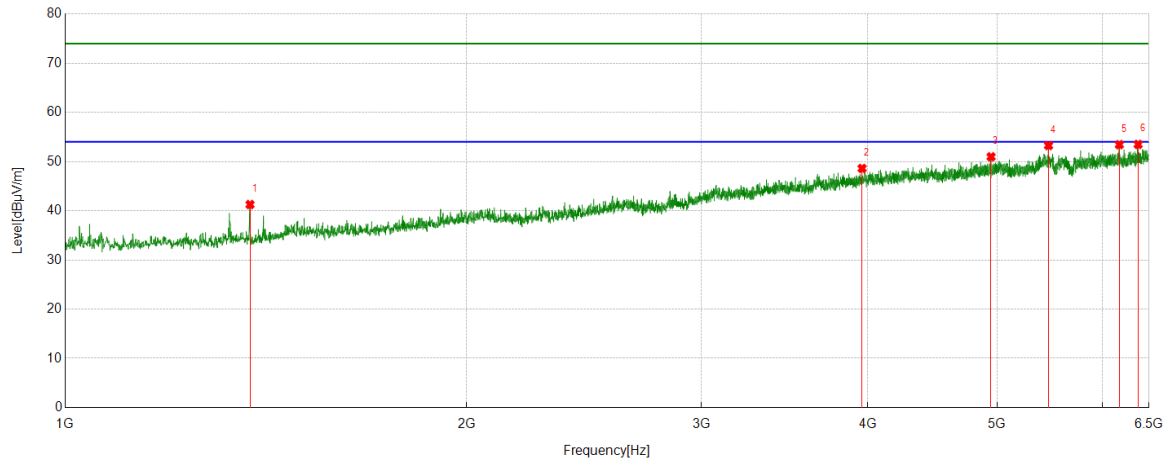


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1376.1095	42.58	-1.31	41.27	74.00	-32.73	Vertical
2	3960.0575	35.45	13.16	48.61	74.00	-25.39	Vertical
3	4948.1185	35.87	15.10	50.97	74.00	-23.03	Vertical
4	5464.4956	35.40	17.87	53.27	74.00	-20.73	Vertical
5	6175.4594	34.91	18.53	53.44	74.00	-20.56	Vertical
6	6378.9849	33.90	19.60	53.50	74.00	-20.50	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5670	Horizontal	PASS

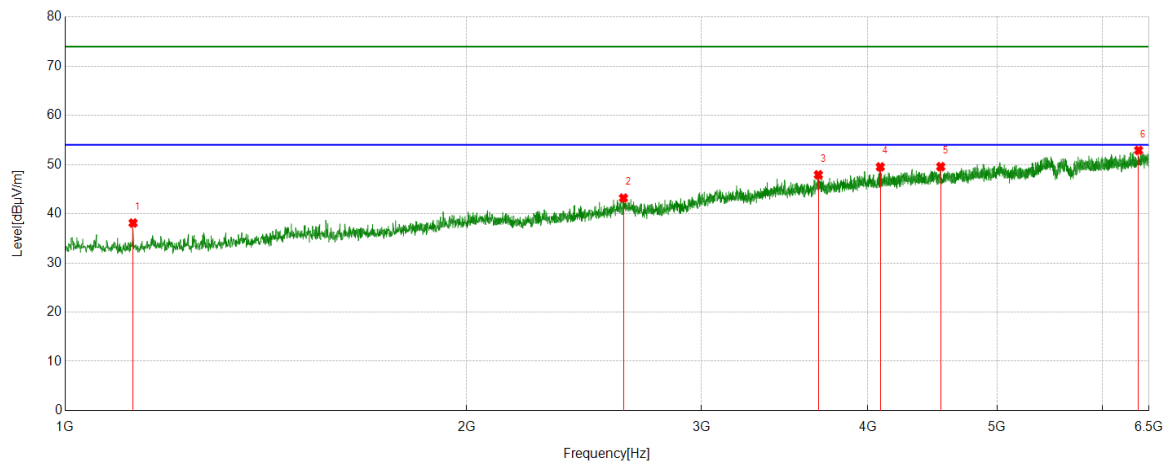

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1124.4531	40.43	-2.31	38.12	74.00	-35.88	Horizontal
2	2622.7028	36.89	6.30	43.19	74.00	-30.81	Horizontal
3	3671.9590	35.84	12.09	47.93	74.00	-26.07	Horizontal
4	4086.5733	36.97	12.56	49.53	74.00	-24.47	Horizontal
5	4536.2545	35.96	13.61	49.57	74.00	-24.43	Horizontal
6	6384.4856	33.32	19.57	52.89	74.00	-21.11	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.