



2.4G bluetooth ant #1 TEST DATA

Picture

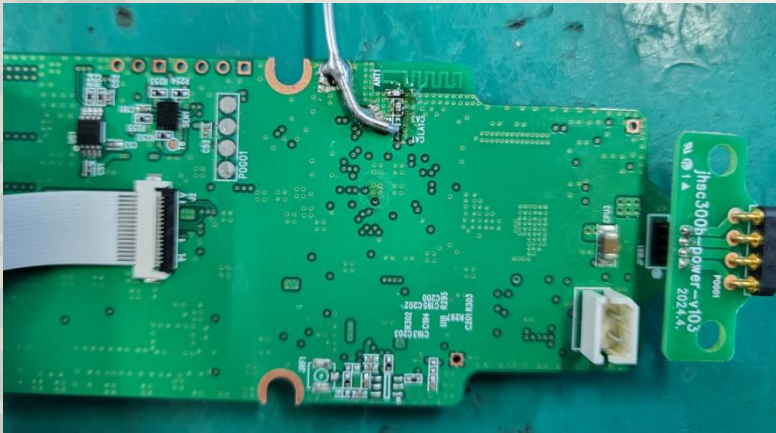

VSWR





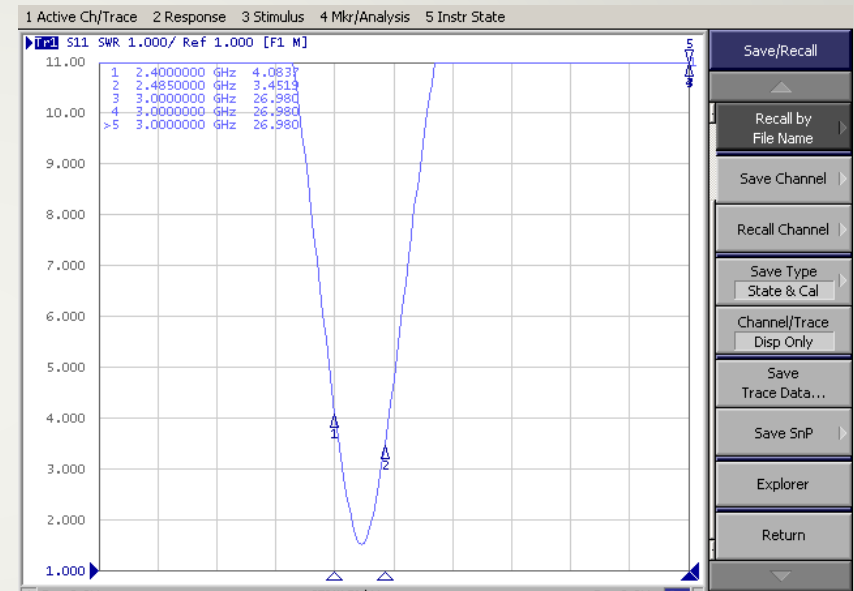


3D gain



	1	2	3	4	5
Frequency [MHz]	2400	2420	2440	2460	2485
Efficiency [dBi]	-11.14	-9.79	-8.72	-8.61	-9.86
Efficiency [%]	7.7	10.5	13.4	13.8	10.3
Peak Gain [dBi]	-6.26	-4.73	-3.71	-3.45	-4.90
Directivity [dBi]	4.88	5.07	5.01	5.16	4.96
Minimum Gain [dBi]	-18.85	-17.29	-16.46	-16.78	-18.38

2.4G ANT DATA – 3D Radiation Pattern

3D Radiation Pattern

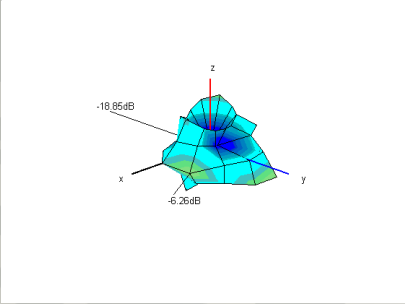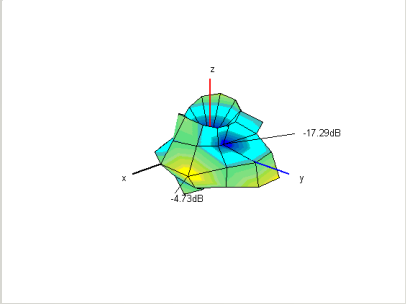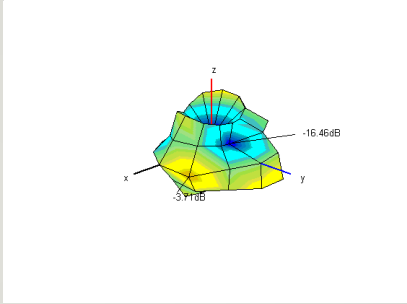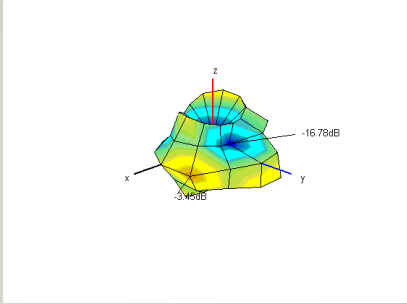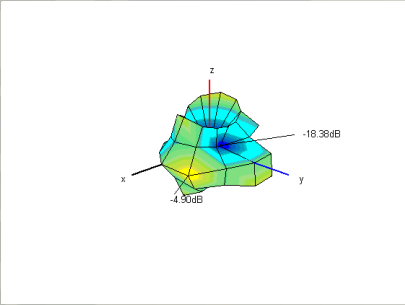2400	2420	2440	2460
			
2485			
			

Measurement Procedure

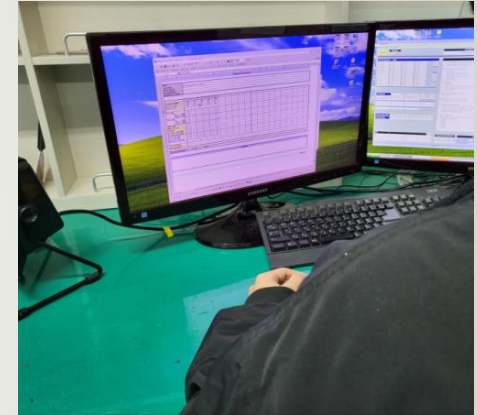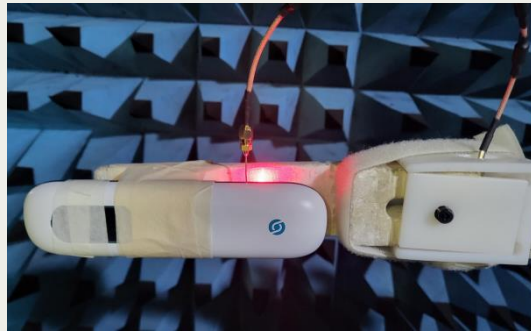

Network Analyzer을
이용하여 VSWR 측정

3D Chamber에 Set 거치


Program을 이용하여
Gain 측정

Measurement Equipment

Network Analyzer



E5071B (Agilent)

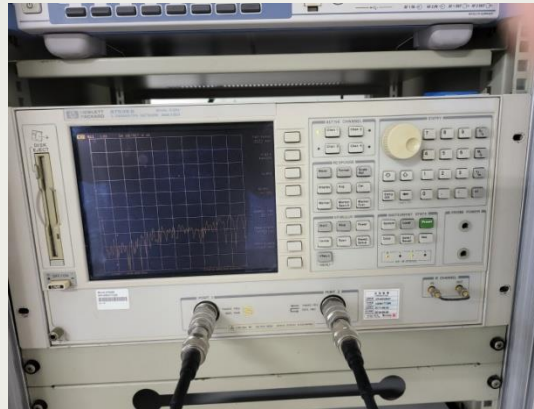

8753ES (Agilent)



**CTIA 3D OTA
Chamber(A+Tech)**