


Case No. : <u>CTA24052001101</u>	
Ambient Condition: <u>23</u> °C, <u>53</u> %RH	
According Standard: ■Part15C	
Test Date: <u>2024.5.16</u>	Test Engineer: <u>Evan ouyang</u>

Appendix A.1: DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.696	2401.788	2402.484	0.5	PASS
		2440	0.764	2439.772	2440.536	0.5	PASS
		2480	0.716	2479.780	2480.496	0.5	PASS

Test Graphs

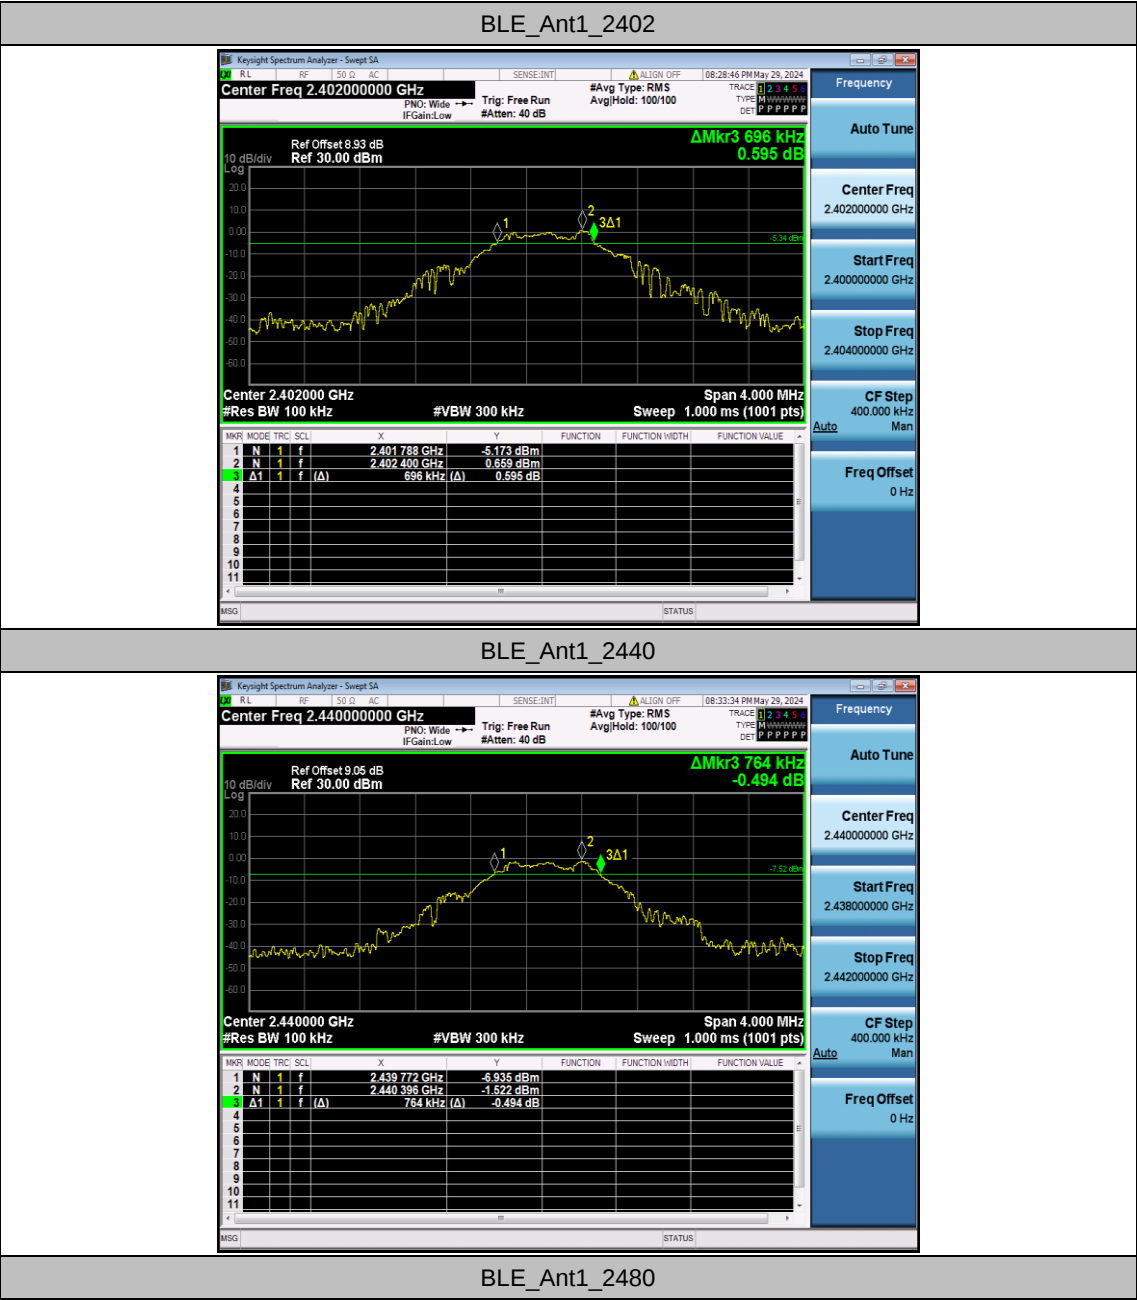

BLE_Ant1_2440

Frequency
Auto Tune
Center Freq 2.440000000 GHz
Start Freq 2.438000000 GHz
Stop Freq 2.442000000 GHz
CF Step 400.000 kHz
Auto Man
Freq Offset 0 Hz


BLE_Ant1_2480

Appendix A.2: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
BLE	Ant1	2402	1.2197	2401.5680	2402.7877
		2440	1.1808	2439.5298	2440.7106
		2480	1.1120	2479.5887	2480.7007

Test Graphs

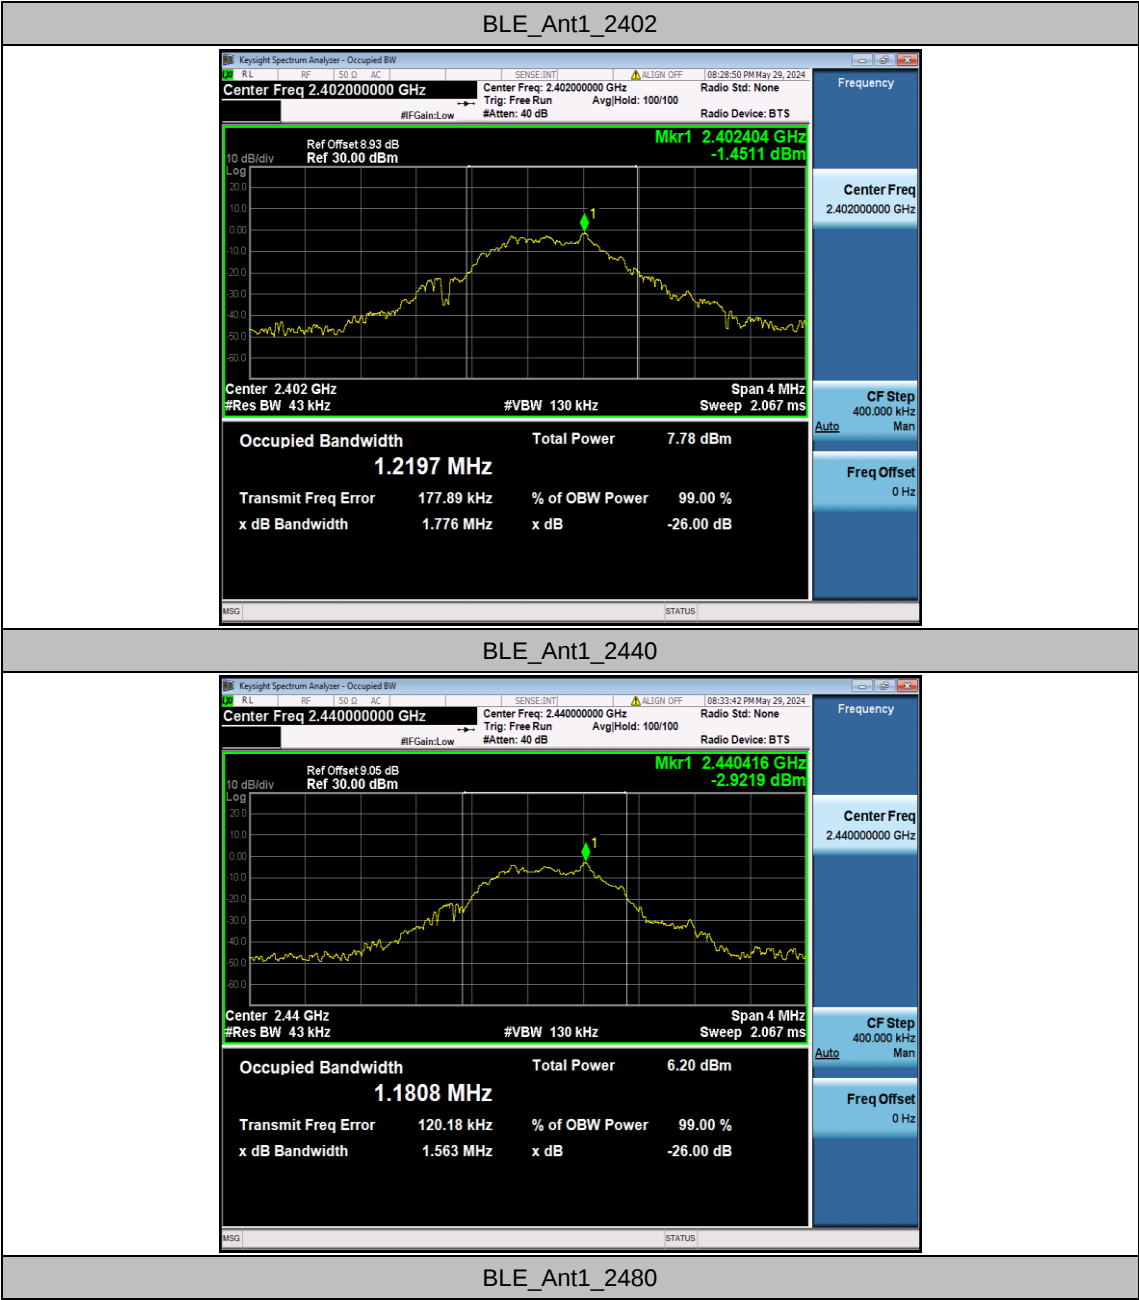

Appendix A.3: Maximum conducted output power

Test Result Peak

TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE	Ant1	2402	1.16	≤30	PASS
		2440	-0.35	≤30	PASS
		2480	-0.49	≤30	PASS

Appendix A.4: Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-14.21	≤8.00	PASS
		2440	-15.75	≤8.00	PASS
		2480	-15.70	≤8.00	PASS

Note:

1. The Duty Cycle Factor and RBW Factor is compensated in the graph.

Test Graphs

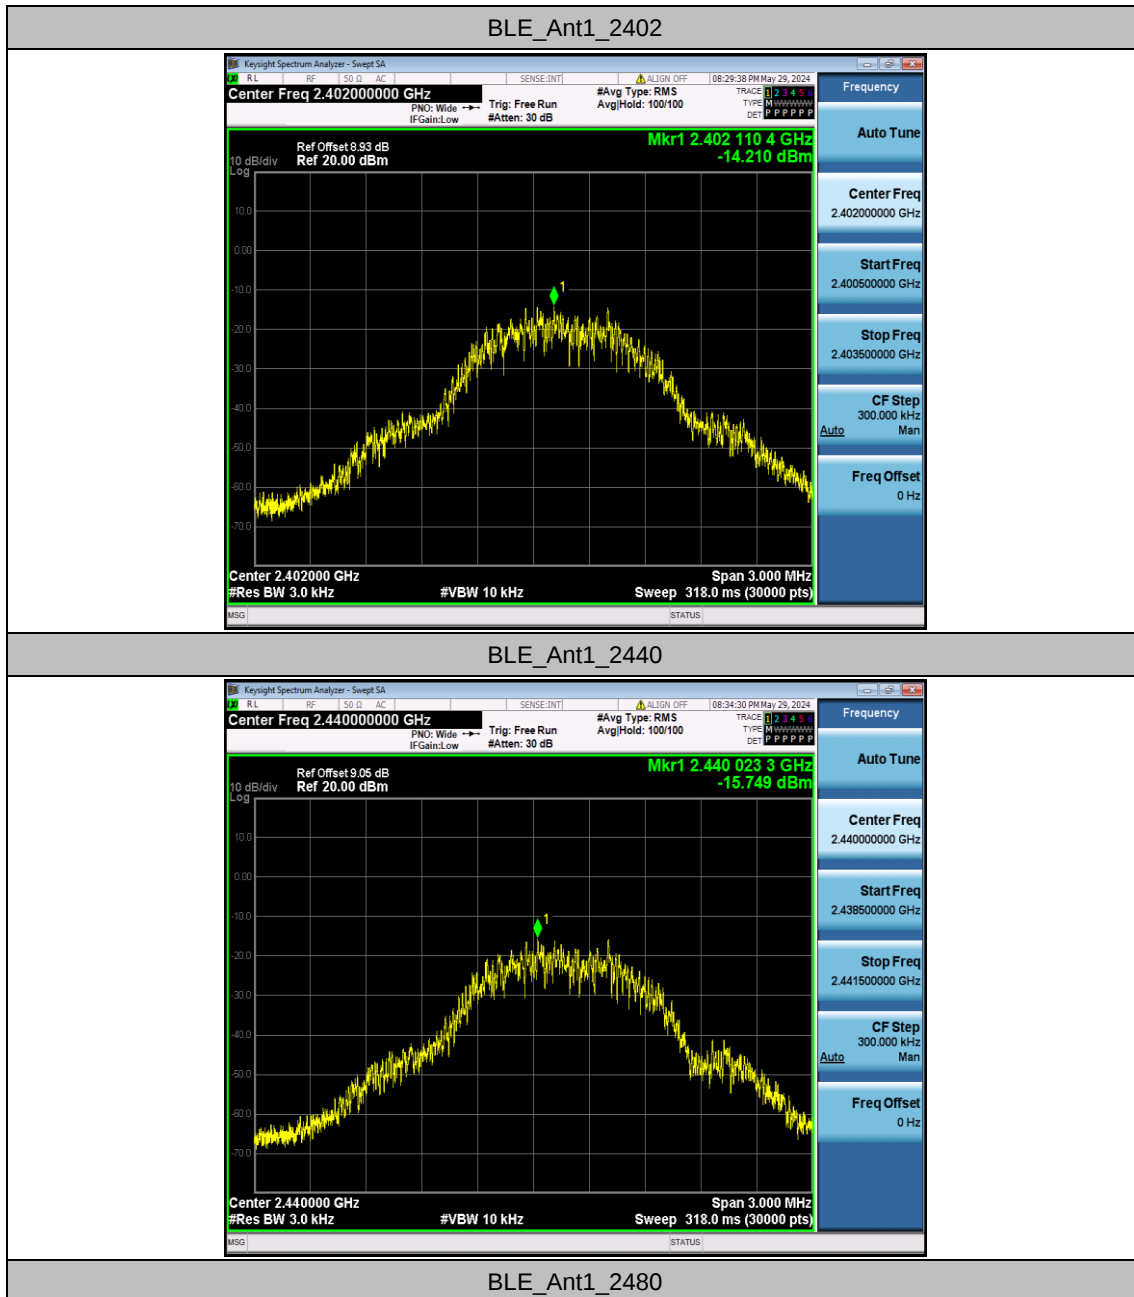

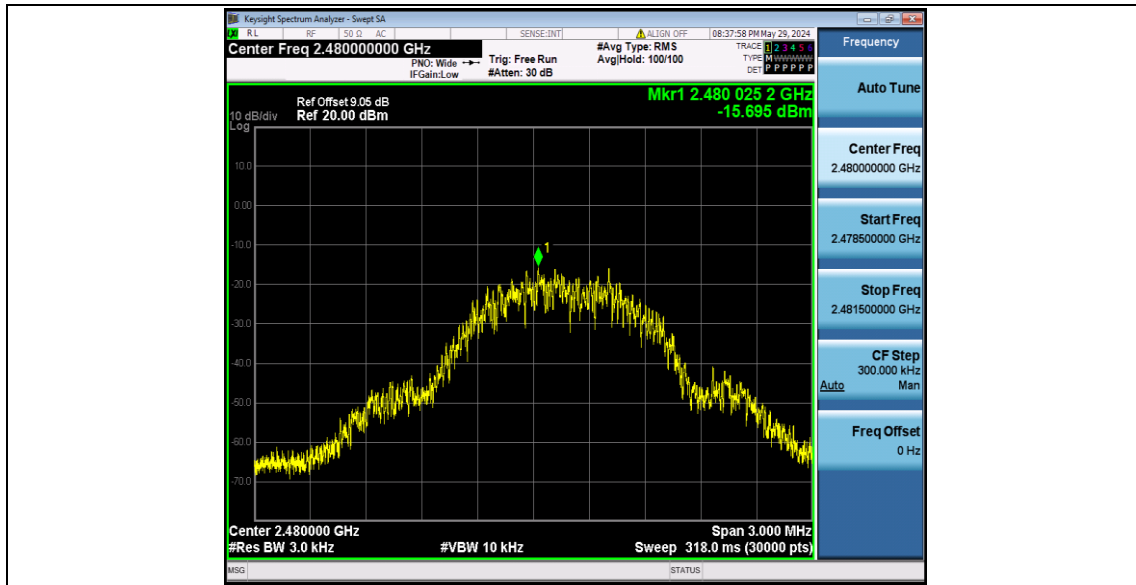


Appendix A.5: Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	Low	2402	0.99	-38.98	≤-19.01	PASS
		High	2480	-0.60	-43.47	≤-20.6	PASS

Test Graphs

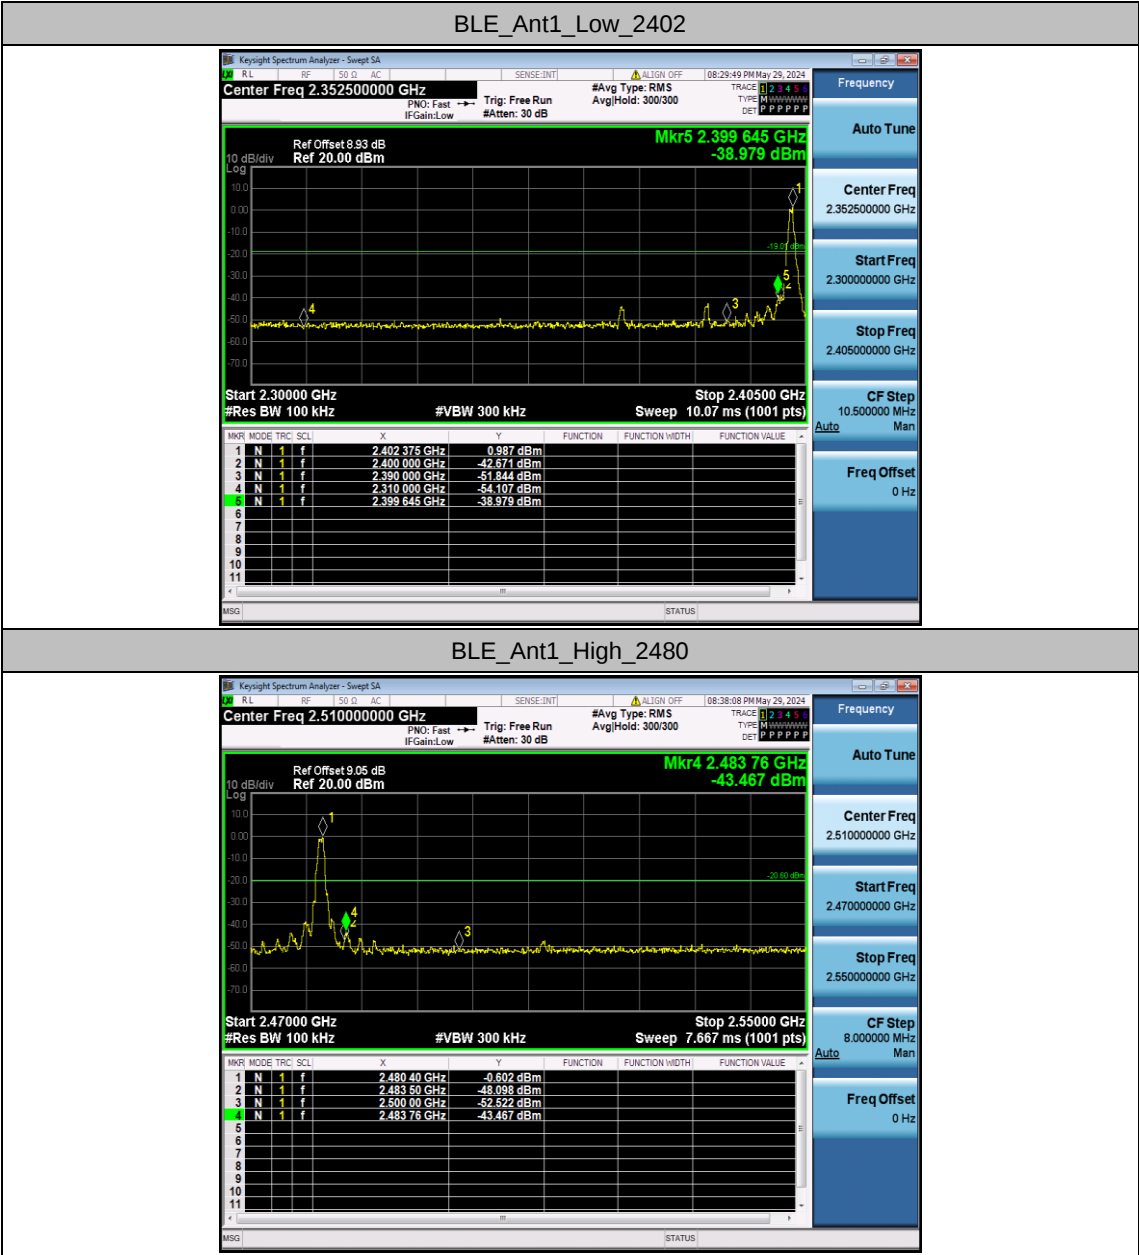



Appendix A.6: Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	Reference	0.75	0.75	---	PASS
			30~1000	0.75	-60.61	≤ -19.25	PASS
			1000~26500	0.75	-47.56	≤ -19.25	PASS
		2440	Reference	-1.57	-1.57	---	PASS
			30~1000	-1.57	-61.06	≤ -21.57	PASS
			1000~26500	-1.57	-47.18	≤ -21.57	PASS
		2480	Reference	-0.83	-0.83	---	PASS
			30~1000	-0.83	-59.81	≤ -20.83	PASS
			1000~26500	-0.83	-47.82	≤ -20.83	PASS

Test Graphs

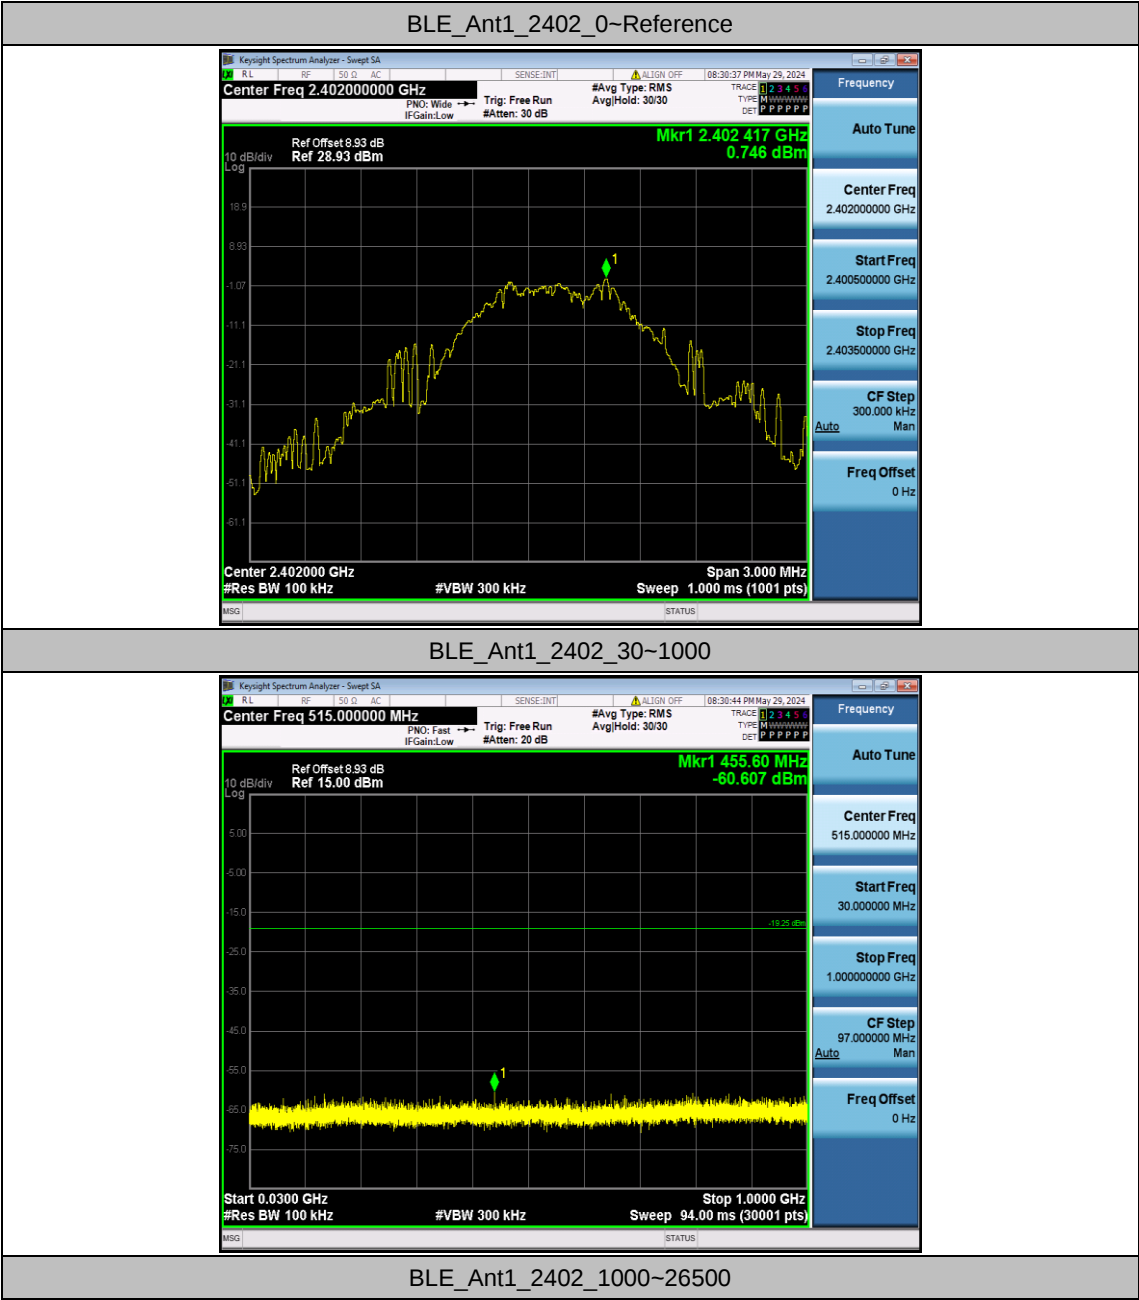


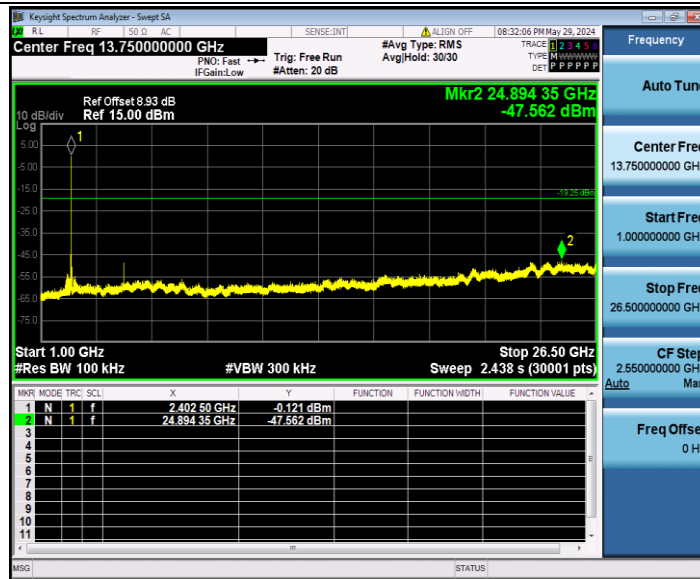


BLE_Ant1_2440_0~Reference



BLE_Ant1_2440_30~1000

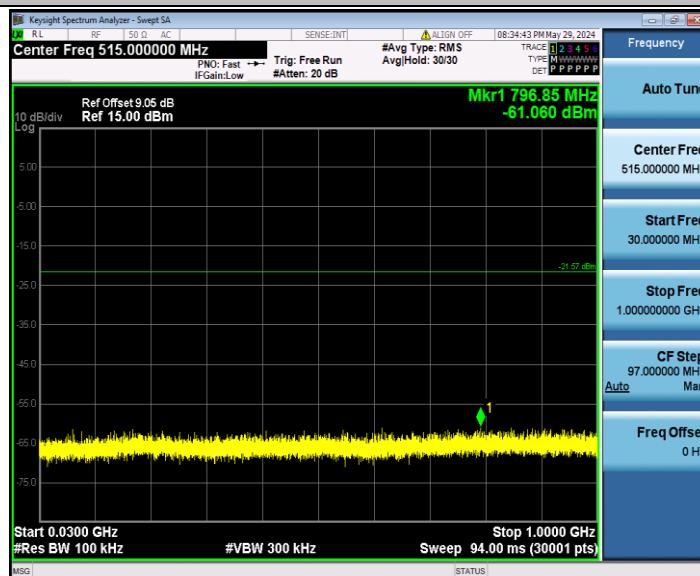


BLE_Ant1_2440_1000~26500

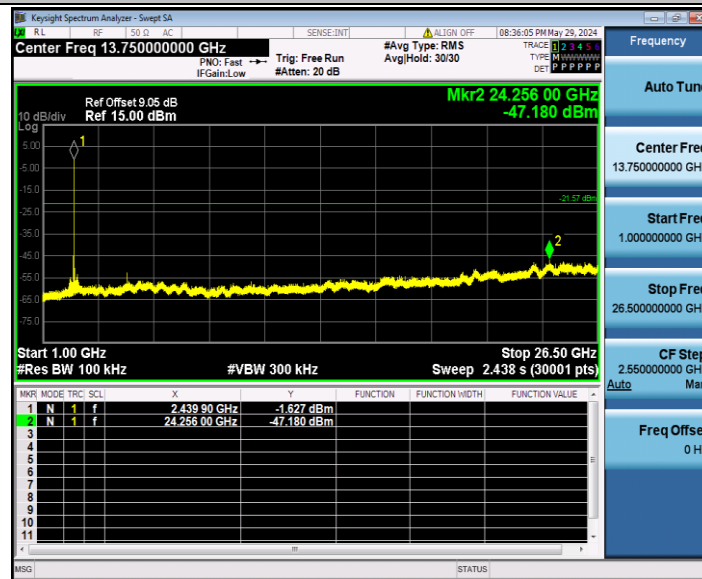

BLE_Ant1_2480_0~Reference



BLE_Ant1_2480_30~1000

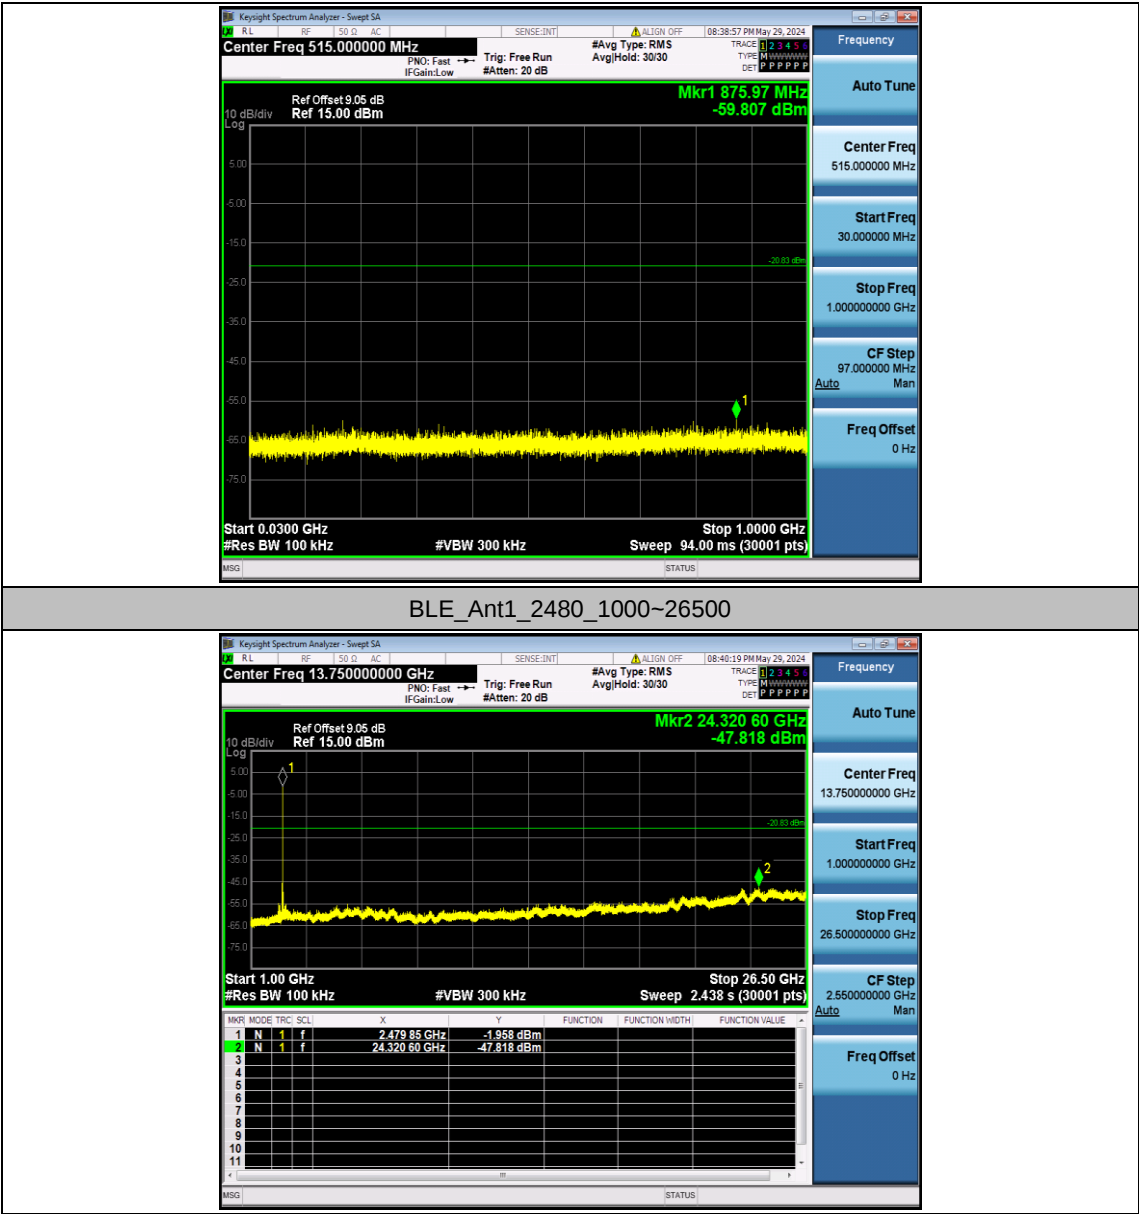

Appendix A.7: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE	Ant1	Low	2402	AV	2310.000	-49.22	≤-41.20	45.98	≤54	PASS
				AV	2385.995	-42.51	≤-41.20	52.69	≤54	PASS
				AV	2390.000	-48.84	≤-41.20	46.36	≤54	PASS
				Peak	2310.000	-42.12	≤-21.20	53.08	≤74	PASS
				Peak	2385.995	-36.23	≤-21.20	58.97	≤74	PASS
				Peak	2390.000	-42.41	≤-21.20	52.79	≤74	PASS
		High	2480	AV	2483.500	-46.3	≤-41.20	48.90	≤54	PASS
				AV	2483.520	-46.3	≤-41.20	48.90	≤54	PASS
				AV	2500.000	-48.55	≤-41.20	46.65	≤54	PASS
				Peak	2483.500	-35.64	≤-21.20	59.56	≤74	PASS
				Peak	2483.920	-33.21	≤-21.20	61.99	≤74	PASS
				Peak	2500.000	-41.75	≤-21.20	53.45	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

