

TEST REPORT

Bureau Veritas CPS Korea Tech Limited
(Annyeong-dong) 26, 28, 30, Seja-ro
406beon-gil, Hwaseong-si, Gyeonggi-do,
Republic of Korea
Tel:031-222-4251, Fax: -

Report No.: KST-FCR-250006



1. Applicant

- Name : Ettifos Co.
- Address : 405, 41, Beolmal-ro 50beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea

2. Test Item

- Product Name: THEUS C-V2X RSU
- Model Name: ETF-PRO-RC02
- Brand: None
- FCC ID: 2BHJL-ETF-PRO-RC02

3. Manufacturer

- Name : Ettifos Co.
- Address : 405, 41, Beolmal-ro 50beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea

4. Date of Test : 2025. 05. 02.

FCC CFR 47, Part 15. Subpart E-15.407

5. Test Method Used : 789033 D02 15.407 Meas Guidance v01r04

ANSI C 63.10-2013

6. Test Result : Compliance

7. Note: None

Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C 63.26-2015.

We attest to the accuracy of data and all measurements reported herein were performed by Bureau Veritas CPS Korea Tech Limited and were made under Chief Engineer's supervision. We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by Name : Jung, Ho-Cheol (Signature)	Technical Manager Name : Lee, Mi-Young (Signature)
-------------	--	---

2025. 05. 07.

Bureau Veritas CPS Korea Tech Limited

Table of Contents

1. GENERAL INFORMATION	3
1.1 Test Facility	3
1.2 Location	3
1.3 Revision History of test report	4
2. EQUIPMENT DESCRIPTION	5
3. SYSTEM CONFIGURATION FOR TEST	6
3.1 Characteristics of equipment	6
3.2 Used peripherals list	6
3.3 Product Modification	6
3.4 Operating Mode	6
3.5 Test Setup of EUT	6
3.6 Parameters of Test Software Setting	7
3.7 Table for Carrier Frequencies	8
3.9 Used Test Equipment List	9
4. SUMMARY TEST RESULTS	11
5. MEASUREMENT RESULTS	12
5.1 Spurious RF Radiated emissions	12
5.2 Antenna requirement	36

1. GENERAL INFORMATION

1.1 Test Facility


Test laboratory and address

Bureau Veritas CPS Korea Tech Limited
(Annyeong-dong) 26, 28, 30, Seja-ro 406beon-gil, Hwaseong-si, Gyeonggi-do, Republic of Korea
Telephone Number: 82-31-222-4251
Facsimile Number: -

Registration information

KOLAS No.: KT232
RRA (National Radio Research Agency): KR0041
FCC Designation No.: KR0041
IC Designation No.: KR0041
VCCI Membership No.: 2005

1.2 Location

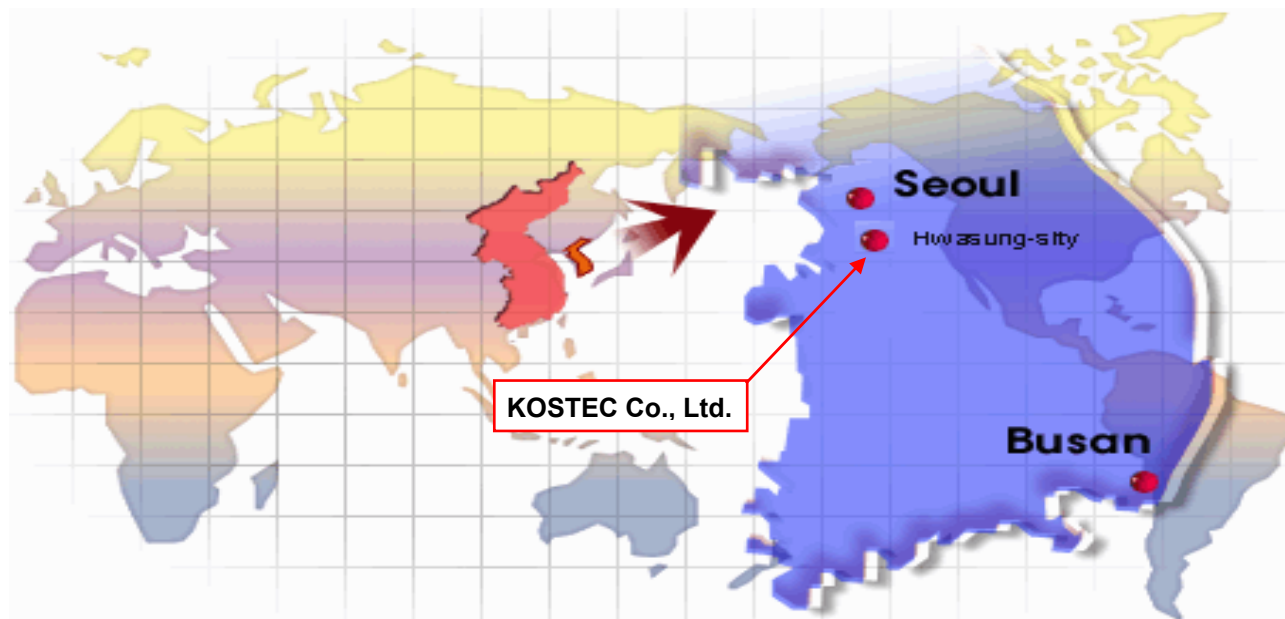

1.3 Revision History of test report

Rev.	Revisions	Effect page	Reviewed	Date
-	Initial issue	All	Mi-Young, Lee	2025. 05. 07.

2. EQUIPMENT DESCRIPTION

The product specification described herein was declared by manufacturer. And refer to user's manual for the details.

Equipment Name	THEUS C-V2X RSU
Model No	ETF-PRO-RC02
Usage	THEUS C-V2X RSU
Serial Number	Proto type
Modulation type	OFDM
Emission Type	D2D
Maximum output power	19.80 dBm
Operated Frequency	Band 1: 802.11a/n(HT20)/ac(VHT20): 5 180 MHz ~ 5 240 MHz 802.11n(HT40)/ac(VHT40): 5 190 MHz ~ 5 230 MHz 802.11ac(VHT80): 5 210 MHz Band 4: 802.11a/n(HT20)/ac(VHT20): 5 745 MHz ~ 5 825 MHz 802.11n(HT40)/ac(VHT40): 5 755 MHz ~ 5 795 MHz 802.11ac(VHT80): 5 775 MHz
Channel Number	Band 1: 802.11a/n(HT20)/ac(VHT20): 4 802.11n(HT40)/ac(VHT40): 2 802.11ac(VHT80): 1 Band 4: 802.11a/n(HT20)/ac(VHT20): 5 802.11n(HT40)/ac(VHT40): 2 802.11ac(VHT80): 1
Operation temperature	-10 °C ~ 50 °C
Power Source	DC 48 V(PoE)
Antenna Description	External Dipole antenna, gain : 3.5 dBi
Remark	1. The device was operating at its maximum output power for all measurements. 2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case (Y) is shown in the report. 3. The above DUT's information was declared by manufacturer. Please refer to the specifications or user manual for more detailed description. 4. This product is equipped with a certified module, and the details are as follows - Applicant: FN-LINK TECHNOLOGY LIMITED - FCC ID: 2AATL-8223A-SR - Model: 8223A-SR
FCC ID	2BHJL-ETF-PRO-RC02

3. SYSTEM CONFIGURATION FOR TEST

3.1 Characteristics of equipment

The Equipment Under Test (EUT) contains the following capabilities: This equipment is C-V2X RSU. The detailed explanation is refer as user manual.

3.2 Used peripherals list

Description	Model No.	Serial No.	Manufacture	Remark
Notebook	80QQ	PF0E1J1Z	Lenovo PC HK Limited	-

3.3 Product Modification


N/A

3.4 Operating Mode

Constantly transmitting with a modulated carrier at maximum power on the low, middle and high channels.

3.5 Test Setup of EUT

The measurements were taken in continuous transmit mode using the test mode which controlled by Teraterm. The test command and the test Jig and cables were provided by the applicant.

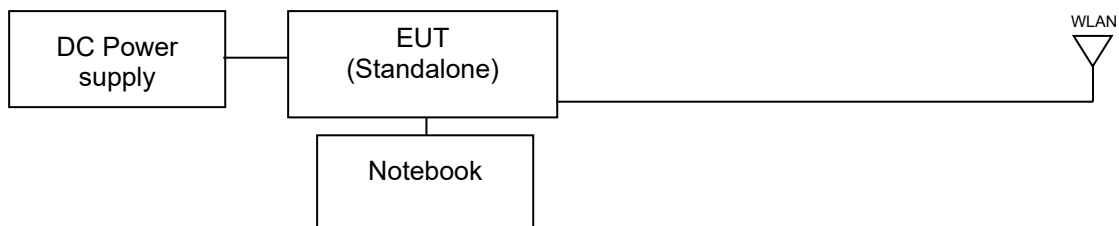


3.6 Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

■ TX Power setting value during test

Mode	Rate	TX Power setting value		
		Low CH	Middle CH	High CH
802.11a	6 Mbps	default	default	default
802.11n(HT20)	MCS0	default	default	default
802.11n(HT40)	MCS0	default	default	default
802.11ac(VHT20)	MCS0	default	default	default
802.11ac(VHT40)	MCS0	default	default	default
802.11ac(VHT80)	MCS0	default	default	default

■ Test Program : TeraTerm

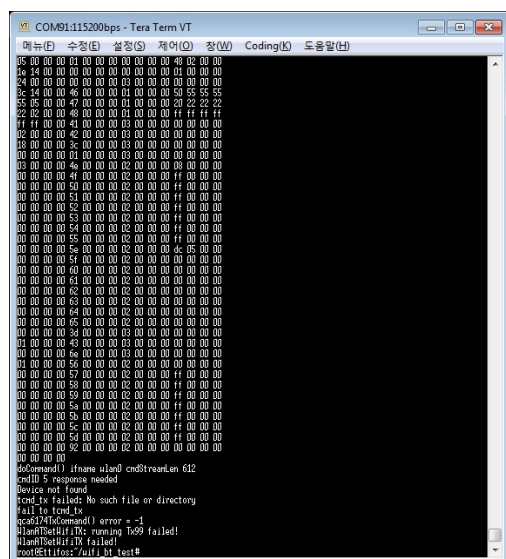

3.7 Table for Carrier Frequencies

- 20 MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5 180	149	5 745
40	5 200	153	5 765
44	5 220	157	5 785
48	5 240	161	5 805
		165	5 825

- 40 MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5 190	151	5 755
46	5 230	159	5 790

- 80 MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5 210	155	5 775

3.9 Used Test Equipment List

No.	Instrument	Model	S/N	Manufacturer	Next Cal Date	Cal interval	used
1	T & H Chamber	PL-3J	15003623	ESPEC CORP	2025.08.13	1 year	☐
2	T & H Chamber	SH-662	93000067	ESPEC CORP	2025.08.13	1 year	☐
3	T & H Chamber	SH-642	93011406	ESPEC CORP	2025.08.13	1 year	☐
4	Spectrum Analyzer	8563EC	3046A00527	Agilent Technology	2026.01.08	1 year	☐
5	Spectrum Analyzer	FSV30	104029	Rohde & Schwarz	2025.08.12	1 year	☐
6	Spectrum Analyzer	FSV30	20-353063	Rohde & Schwarz	2026.01.08	1 year	☐
7	Spectrum Analyzer	FSV40	101727	Rohde & Schwarz	2025.08.12	1 year	☐
8	Signal Analyzer	FSW43	101294	Rohde & Schwarz	2026.01.08	1 year	☐
9	Signal Analyzer	FSW85	101602	Rohde & Schwarz	2025.07.03	1 year	☐
10	EMI Test Receiver	ESCI7	100823	Rohde & Schwarz	2026.01.07	1 year	☐
11	EMI Test Receiver	ESPI	100488	Rohde & Schwarz	2026.01.06	1 year	☐
12	EMI Test Receiver	ESI	837514/004	Rohde & Schwarz	2025.08.12	1 year	☒
13	Vector Signal Analyzer	89441A	3416A02620	Agilent Technology	2026.01.09	1 year	☐
14	Network Analyzer	8753ES	US39170869	AGILENT	2025.08.13	1 year	☐
15	EPM Series Power meter	E4418B	GB39512547	Agilent Technology	2026.01.08	1 year	☐
16	RF Power Sensor	E9300A	MY41496631	Agilent Technology	2026.01.08	1 year	☐
17	Microwave Frequency Counter	5352B	2908A00480	Agilent Technology	2026.01.06	1 year	☐
18	Audio Analyzer	8903B	3514A16919	Agilent Technology	2026.01.06	1 year	☐
19	Audio Telephone Analyzer	DD-5601CID	520010281	CREDIX	2026.01.06	1 year	☐
20	Modulation Analyzer	8901A	3041A05716	H.P	2026.01.08	1 year	☐
21	Digital storage Oscilloscope	TDS3052	B015962	Tektronix	2025.08.13	1 year	☐
22	ESG-D Series Signal Generator	E4436B	US39260458	Agilent Technology	2026.01.09	1 year	☐
23	Vector Signal Generator	SMBV100A	257557	Rohde & Schwarz	2026.01.09	1 year	☐
24	GNSS Signal Generator	TC-2800A	2800A000494	TESCOM CO., LTD.	2026.01.09	1 year	☐
25	Signal Generator	SMB100A	179628	Rohde & Schwarz	2026.01.09	1 year	☐
26	Signal Generator	N5173B	MY57280148	KEYSIGHT	2026.03.27	1 year	☐
27	SLIDAC	None	0207-4	Myoung sung Ele.	2026.01.06	1 year	☐
28	DC Power supply	DDPS-3K	U03-109	Digitech Power	2026.01.07	1 year	☒
29	DC Power supply	E3610A	KR24104505	Agilent Technology	2026.01.06	1 year	☐
30	DC Power supply	UP-3005T	68	Unicon Co.,Ltd	2026.01.06	1 year	☐
31	DC Power Supply	SM 3400-D	114701000117	DELTAELEKTRONIKA	2026.01.06	1 year	☐
32	DC Power supply	6632B	MY43004005	Agilent Technology	2026.01.06	1 year	☐
33	DC Power Supply	6632B	MY43004137	Agilent Technology	2026.01.06	1 year	☐
34	Termination	1433-3	LM718	WEINSCHEL	2026.01.08	1 year	☐
35	Termination	1432-3	QR946	AEROFLEX/WEINSCHEL	2026.01.08	1 year	☐
36	Attenuator	8498A	3318A09485	HP	2026.01.08	1 year	☐
37	Step Attenuator	8494B	3308A32809	HP	2026.01.08	1 year	☐
38	RF Step Attenuator	RSP	100091	Rohde & Schwarz	2026.01.09	1 year	☐
39	Attenuator	18B50W-20F	64671	INMET	2026.01.09	1 year	☐
40	Attenuator	10 dB	1	Rohde & Schwarz	2026.01.08	1 year	☐
41	Attenuator	54A-10	74564	WEINSCHEL	2025.08.19	1 year	☐
42	Attenuator	56-10	66920	WEINSCHEL	2026.01.08	1 year	☐
43	Attenuator	SA18N100-20	001	FAIRVIEW MICROWAVE	2025.08.12	1 year	☐
44	Attenuator	SA26B-10	33464/2134	FAIRVIEW MICROWAVE	2025.08.19	1 year	☐
45	Attenuator	SA4018-10	DC 2126	FAIRVIEW MICROWAVE	2025.08.19	1 year	☐
46	Power divider	11636B	51212	HP	2026.01.08	1 year	☐
47	3Way Power divider	KPDSU3W	00070365	KMW	2025.08.12	1 year	☐
48	4Way Power divider	70052651	173834	KRYTAR	2026.01.08	1 year	☐
49	3Way Power divider	1580	SQ361	WEINSCHEL	2026.01.08	1 year	☐
50	OSP	OSP120	101577	Rohde & Schwarz	2026.01.09	1 year	☐
51	White noise audio filter	ST31EQ	101902	SoundTech	2025.08.13	1 year	☐

No.	Instrument	Model	S/N	Manufacturer	Next Cal Date	Cal interval	used
52	Dual directional coupler	778D	17693	HEWLETT PACKARD	2026.01.09	1 year	☐
53	Dual directional coupler	772D	2839A00924	HEWLETT PACKARD	2026.01.09	1 year	☐
54	Band rejection filter	3TNF-0006	26	DOVER Tech	2026.01.09	1 year	☐
55	Band rejection filter	3TNF-0007	311	DOVER Tech	2026.01.09	1 year	☐
56	Band rejection filter	WTR-BRF2442-84NN	09020001	WAVE TECH Co.,LTD	2026.01.09	1 year	☐
57	Band rejection filter	WRCJV12-5695-5725-5825-5855-50SS	1	Wainwright Instruments GmbH	2026.01.09	1 year	☐
58	Band rejection filter	WRCJV12-5120-5150-5350-5380-40SS	4	Wainwright Instruments GmbH	2026.01.09	1 year	☐
59	Band rejection filter	WRCGV10-2360-2400-2500-2540-50SS	2	Wainwright Instruments GmbH	2026.01.09	1 year	☐
60	Band rejection filter	CTF-155M-S1	001	RF One Electronics	2025.08.12	1 year	☐
61	Band rejection filter	CTF-435M-S1	001	RF One Electronics	2025.08.12	1 year	☐
62	Band rejection filter	CTF-5890M-70MS1	1	RF One Electronics	2026.01.09	1 year	☐
63	Highpass Filter	WHJS1100-10EF	1	WAINWRIGHT	2026.01.08	1 year	☐
64	Highpass Filter	WHJS3000-10EF	1	WAINWRIGHT	2026.01.08	1 year	☐
65	Highpass Filter	WHNX6-5530-7000-26500-40CC	2	Wainwright Instruments GmbH	2026.01.13	1 year	☐
66	Highpass Filter	WHNX6-2370-3000-26500-40CC	4	Wainwright Instruments GmbH	2026.01.13	1 year	☐
67	WideBand Radio Communication Tester	CMW500	102276	Rohde & Schwarz	2026.01.09	1 year	☐
68	WideBand Radio Communication Tester	CMW500	117235	Rohde & Schwarz	2026.01.15	1 year	☐
69	WideBand Radio Communication Tester	MT8000A	6261987920	Anritsu	2026.01.08	1 year	☐
70	WideBand Radio Communication Tester	MT8821C	6262287695	Anritsu	2026.01.08	1 year	☐
71	Bluetooth Tester	TC-3000B	3000B6A0166	TESCOM CO., LTD.	2026.01.10	1 year	☐
72	Loop Antenna	6502	9203-0493	EMCO	2025.05.23	2 year	☐
73	Loop Antenna	FMZB1513	#374	Schwarzbeck	2027.02.11	2 year	☒
74	BiconiLog Antenna _(R)	3142C	35880	ETS-LINDGREN	2026.10.17	2 year	☒
75	Trilog-Broadband Antenna _(R)	VULB 9168	9168-606	SCHWARZBECK	2026.09.03	2 year	☐
76	Biconical Antenna _(T)	VUBA9117	9117-342	Schwarz beck	2026.01.16	2 year	☐
77	Horn Antenna	3115	9605-4834	EMCO	2026.02.21	1 year	☐
78	Horn Antenna	QMS-00208	21909	STEATITE ANTENNA	2026.03.31	1 year	☐
79	Horn Antenna _(R)	3117	00135191	ETS-LINDGREN	2026.03.24	1 year	☒
80	Horn Antenna _(T)	3115	2996	EMCO	2026.01.07	1 year	☐
81	Horn Antenna _(R)	BBHA 9170	9170-722	SCHWARZBECK	2026.01.13	1 year	☒
82	Horn Antenna _(T)	BBHA 9170	743	SCHWARZBECK	2026.01.07	1 year	☐
83	AMPLIFIER(A 10)	TK-PA01S	220109-L	TESTEK	2026.01.07	1 year	☐
84	AMPLIFIER(C 3)	TK-PA01S	200141-L	TESTEK	2025.08.12	1 year	☒
85	PREAMPLIFIER(C 3)	8449B	3008A02577	Agilent	2026.01.06	1 year	☐
86	RF PRE AMPLIFIER	SCU08F2	100762	Rohde & Schwarz	2025.08.22	1 year	☐
87	AMPLIFIER	TK-PA18	150003	TESTEK	2026.01.07	1 year	☒
88	AMPLIFIER	TK-PA1840H	160010-L	TESTEK	2026.01.06	1 year	☒

4. SUMMARY TEST RESULTS

Description of Test	FCC Rule	Reference Clause	Used	Test Result
Transmit Power	§ 15.407(a)	-	☐	N/P ¹⁾
Peak power spectral density	§ 15.407(a)	-	☐	N/P ¹⁾
Emission Bandwidth	§ 15.407(e)	-	☐	N/P ¹⁾
Frequency Stability	§ 15.407(g)	-	☐	N/P ¹⁾
Spurious RF radiated emissions	15.407(b), 15.209(a)	Clause 5.1	☒	Compliance
Antenna requirement	15.203	Clause 5.2	☒	Compliance
AC Power Conducted emissions	15.207	-	☐	N/A ¹⁾
Compliance/pass : The EUT complies with the essential requirements in the standard. Not Compliance : The EUT does not comply with the essential requirements in the standard. N/A : The test was not applicable in the standard. 1) This product uses DC power and is therefore exempt from testing. N/P: Not Performed 1) Leveraged from module certification report under FCC ID: 2AATL-8223A-SR(Report No.: NTC1712035FV00, NTC1712033FV00)				

Procedure Reference

FCC CFR 47, Part 15. Subpart E-15.407

789033 D02 15.407 Meas Guidance v01r04

ANSI C 63.10-2013

5. MEASUREMENT RESULTS

5.1 Spurious RF Radiated emissions

5.1.1 Standard Applicable [FCC §15.407(b)]

FCC

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

§15.209 and RSS-Gen limits for radiated emissions measurements (distance at 3 m)

Frequency Band [MHz]	DISTANCE [Meters]	Limit [$\mu\text{W}/\text{m}$]	Limit [$\text{dB } \mu\text{W}/\text{m}$]	Detector
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)	Peak
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)	Peak
1.705 ~ 30.0	30	30	29.54	Peak
30 - 88	3	100 **	40.00	Quasi peak
88 - 216	3	150 **	43.52	Quasi peak
216 - 960	3	200 **	46.02	Quasi peak
Above 960	3	500	54.00	Average
Above 1000	3	74.0 dB $\mu\text{W}/\text{m}$ (Peak), 54.0 dB $\mu\text{W}/\text{m}$ (Average)		

** fundamental emissions from intentional radiators operation under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, or 470-806 MHz. However, operation within these Frequency bands is permitted under other sections of this Part Section 15.231 and 15.241

§15.205. Restrict Band of Operation for FCC

[MHz]	[MHz]	[MHz]	[GHz]
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505**	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.
4.177 25 - 4.177 75	37.5 -38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.38 6 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	Above 38.6
13.36 - 13.41			

** Until February 1, 1999, this restricted band shall be 0.490-0.510

5.1.2 Test Environment conditions

- Ambient temperature : (20 ~ 21) °C • Relative Humidity : (42 ~ 46) % R.H.

5.1.3 Measurement Procedure

The measurements procedure of the transmitter radiated E-field is as following describe method.

The test is performed in a Shield chamber to determine the accurate frequencies, after maximum emissions level will be checked on a test chamber and measuring distance is 3 m from EUT to test antenna. (The chamber is ensured that comply with at least 6 dB above the ambient noise level)

- ① The EUT was powered ON with continuously operating mode and placed on a 0.8 meter high non-conductive table on the reference ground plane.
 - ② The test antenna was used on Horn antenna for above 1 GHz, and if the below 1 GHz, broad-band antenna and Loop antenna were used for below 30 MHz and it's antenna positioned in both the horizontal and vertical plane was location at EUT during the test for maximized the emission measurement.
 - ③ The output of the test antenna will be connected to a measuring receiver, and it is set to tuned over the frequency range according to required standard
 - ④ The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure(according ANSI C63.10:2009 clause 4.2.3.2.3 procedure for average measure). Both PK and AV level test, PK detector is used.
 - ⑤ The fundamental frequency at which a relevant radiated signal component is detected, the test antenna will be raised and lowered through the specified range of heights in horizontal and vertical polarized orientation, until an maximum signal level is detected on the measuring receiver.
 - ⑥ The transmitter is position x,y,z axis on rotating through 360 degrees, until the maximum signal level is detected by the measuring receiver.
 - ⑦ The receiver is scanned from requested measuring frequency band and then the maximum meter reading is recorded. The radiated emissions were measured with required standard.
- The measurement results are obtained as described below:
$$\text{Result(dB } \mu\text{V/m)} = \text{Reading(dB } \mu\text{V)} + \text{Antenna factor(dB/m)} + \text{CL(dB)} + \text{other applicable factor (dB)}$$
 - According to §15.33 (a)(1), Frequency range of radiated measurement is performed the tenth harmonic.

For the transmitter unwanted emissions shall be measured using following options below:

Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.

Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.

For the transmitter bandedge emissions shall be measured using following options below:

Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.

5.1.4 Measurement Uncertainty


The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the UCISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Radiated Emission measurement: Below 1 GHz: 5.06 dB (CL: Approx 95 %, $k=2$)


Above 1 GHz: 5.00 dB (CL: Approx 95 %, $k=2$)

5.1.5 Test Configuration


Radiated emission setup, below 30 MHz

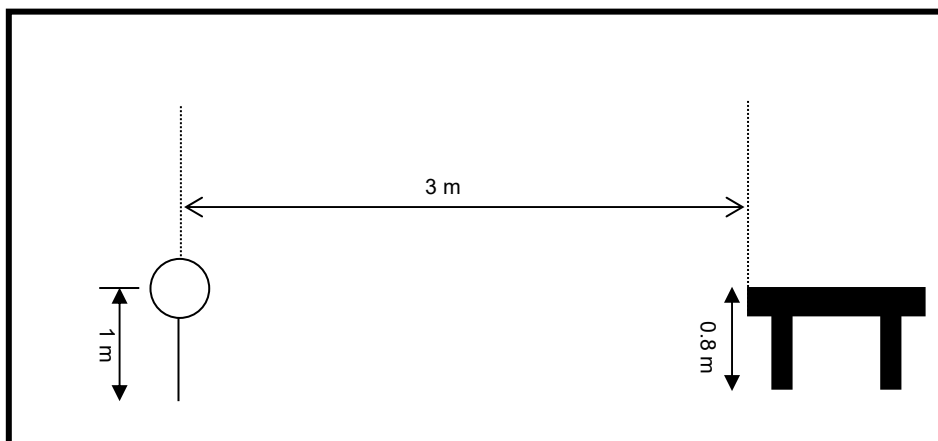

Radiated emission setup, below 1 000 MHz

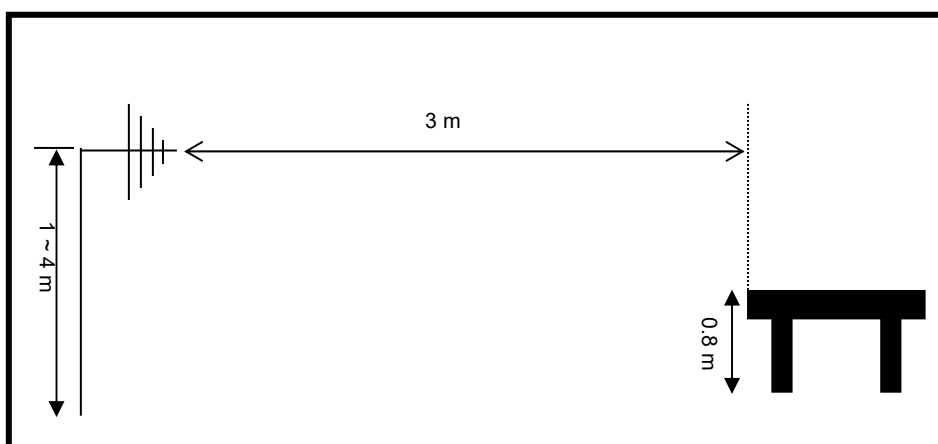

Radiated emission setup, above 1 GHz

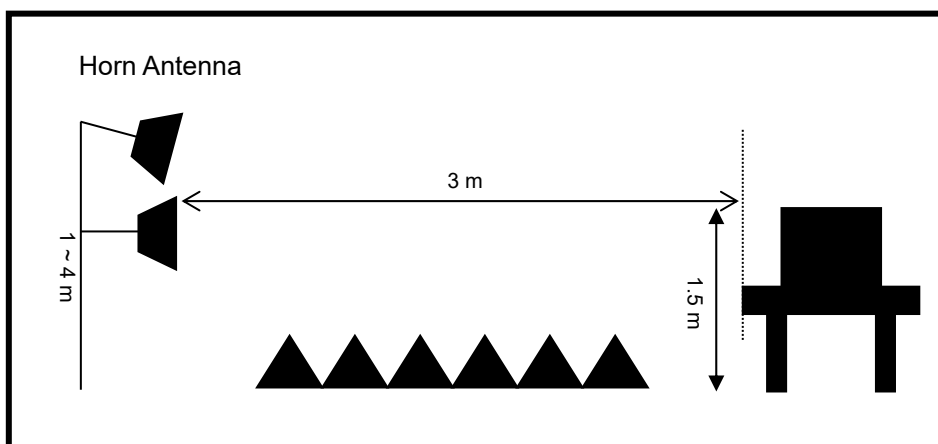

5.1.6 Measurement Result

■ Above 1 GHz

5 GHz Band1

802.11a (5 180 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.148*	44.72	-	1.5	V	34.30	10.22	45.25	44.72	-	74.00	54.00	29.28	-	Compliance

* Restrict band & Band-edge emissions.

802.11a (5 200 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compliance

802.11a (5 240 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.350*	38.26	-	1.5	V	34.60	10.44	45.36	38.26	-	74.00	54.00	35.74	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11n(HT20) (5 180 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.148*	45.16	-	1.5	V	34.30	10.22	45.25	45.16	-	74.00	54.00	28.84	-	Compliance

* Restrict band & Band-edge emissions.

802.11n(HT20) (5 200 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compliance

802.11n(HT20) (5 240 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.350*	38.66	-	1.5	V	34.60	10.44	45.36	38.66	-	74.00	54.00	35.34	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11n(HT40) (5 190 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.149	46.02	-	1.5	V	34.30	10.22	45.25	46.02	-	74.00	54.00	27.98	-	Compliance

* Restrict band & Band-edge emissions.

802.11n(HT40) (5 230 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.350	38.34	-	1.5	H	34.60	10.44	45.36	38.34	-	74.00	54.00	35.66	-	Compliance

* Restrict band & Band-edge emissions.

***Note**

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11ac(VHT20) (5 180 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.148*	45.88	-	1.5	V	34.30	10.22	45.25	45.88	-	74.00	54.00	28.12	-	Compliance

* Restrict band & Band-edge emissions.

802.11ac(VHT20) (5 200 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compliance

802.11ac(VHT20) (5 240 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.350*	38.34	-	1.5	H	34.60	10.44	45.36	38.34	-	74.00	54.00	35.66	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11ac(VHT40) (5 190 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.149*	48.14	-	1.5	V	34.30	10.22	45.25	48.14	-	74.00	54.00	25.86	-	Compliance

* Restrict band & Band-edge emissions.

802.11ac(VHT40) (5 230 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.350*	33.62	-	1.5	H	34.60	10.44	45.36	33.62	-	74.00	54.00	40.38	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11ac(VHT80) (5 210 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.149*	42.25	-	1.5	V	34.30	10.22	45.25	42.25	-	74.00	54.00	31.75	-	Compliance
5.350*	34.31	-	1.5	H	34.60	10.44	45.36	34.31	-	74.00	54.00	39.69	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

5 GHz Band4
802.11a (5 745 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.587*	46.84	-	1.5	V	34.51	11.13	45.37	46.84	-	74.00	54.00	27.16	-	Compliance

* Restrict band & Band-edge emissions.

802.11a (5 785 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compliance

802.11a (5 825 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.954*	46.00	-	1.5	H	35.32	11.52	45.14	46.00	-	74.00	54.00	28.00	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11n(HT20) (5 745 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.597*	46.59	-	1.5	V	34.50	11.12	45.36	46.59	-	74.00	54.00	27.41	-	Compliance

* Restrict band & Band-edge emissions.

802.11n(HT20) (5 785 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compliance

802.11n(HT20) (5 825 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.954*	46.62	-	1.5	V	35.32	11.52	45.14	46.62	-	74.00	54.00	27.38	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11n(HT40) (5 755 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.601*	47.62	-	1.5	H	34.50	11.11	45.36	47.62	-	74.00	54.00	26.38	-	Compliance

* Restrict band & Band-edge emissions.

802.11n(HT40) (5 795 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.954*	46.62	-	1.5	V	35.32	11.52	45.14	46.62	-	74.00	54.00	27.38	-	Compliance

* Restrict band & Band-edge emissions.

***Note**

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11ac(VHT20) (5 745 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.594*	46.85	-	1.5	V	34.5	11.12	45.36	46.85	-	74.00	54.00	27.15	-	Compliance

* Restrict band & Band-edge emissions.

802.11ac(VHT20) (5 785 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compliance

802.11ac(VHT20) (5 825 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.954*	46.00	-	1.5	H	35.32	11.52	45.14	46.00	-	74.00	54.00	28.00	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11ac(VHT40) (5 755 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.599*	46.60	-	1.5	H	34.50	11.11	45.36	46.60	-	74.00	54.00	27.40	-	Compliance

* Restrict band & Band-edge emissions.

802.11ac(VHT40) (5 795 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.954*	47.75	-	1.5	V	35.32	11.52	45.14	47.75	-	74.00	54.00	26.25	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11ac(VHT80) (5 775 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
5.603*	46.33	-	1.5	V	34.50	11.10	45.36	46.33	-	74.00	54.00	27.67	-	Compliance
5.952*	48.00	-	1.5	H	35.31	11.51	45.14	48.00	-	74.00	54.00	26.00	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

■ Below 1 GHz

5 GHz Band1

-802.11a (Worst case)

Freq. (MHz)	Reading (dB μ V/m)	Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
		Height (m)	Pol. (H/V)	Fctr. (dB/m)						
39.18	23.66	3.7	H	17.93	0.88	46.42	23.66	40.00	16.34	Compliance
44.77	33.41	1.0	V	15.59	0.95	46.48	33.41	40.00	6.59	Compliance
51.90	33.16	1.0	V	13.88	1.01	46.53	33.16	40.00	6.84	Compliance
156.43	25.47	3.0	H	14.39	1.74	46.46	25.47	43.50	18.03	Compliance
527.57	31.91	2.9	V	24.49	3.21	46.30	31.91	46.00	14.09	Compliance
875.01	34.65	3.3	V	28.70	4.24	45.89	34.65	46.00	11.35	Compliance

Freq.(MHz): Measurement frequency, Antenna(Height, Pol, Fctr): Antenna Height, Polarization and Factor, CL(dB): Cable loss, AMP(dB): Preamplifier gain(dB), Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB): FCC Limit (dB μ V/m) - Meas Result(dB μ V/m), Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

5 GHz Band4

-802.11a (Worst case)

Freq. (MHz)	Reading (dB μ V/m)	Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
		Height (m)	Pol. (H/V)	Fctr. (dB/m)						
44.78	32.45	1.0	V	15.58	0.95	46.48	32.45	40.00	7.55	Compliance
50.46	34.62	1.0	V	14.04	1.00	46.53	34.62	40.00	5.38	Compliance
87.30	27.66	1.1	V	12.79	1.36	46.53	27.66	40.00	12.34	Compliance
169.00	28.84	3.1	H	14.74	1.82	46.47	28.84	43.50	14.66	Compliance
527.57	34.22	2.4	H	24.49	3.21	46.30	34.22	46.00	11.78	Compliance
881.18	36.81	3.3	V	28.73	4.26	45.88	36.81	46.00	9.19	Compliance

Freq.(MHz): Measurement frequency, Antenna(Height, Pol, Fctr): Antenna Height, Polarization and Factor, CL(dB): Cable loss, AMP(dB): Preamplifier gain(dB), Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB): FCC Limit (dB μ V/m) - Meas Result(dB μ V/m), Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)


5.1.7 Plots

5 GHz Band1


802.11a (The worst case only)

- Below 1 GHz

Horizontal
30 MHz ~ 1 GHz

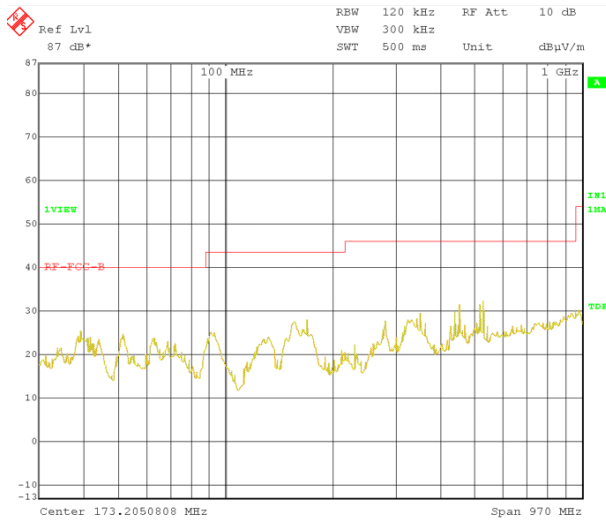


Vertical
30 MHz ~ 1 GHz

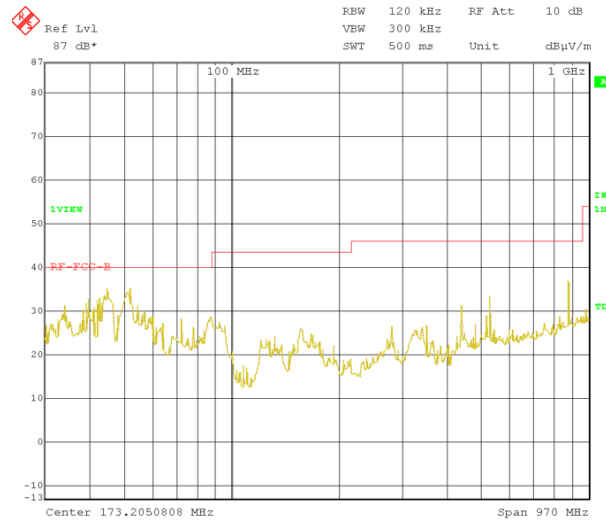


- Above 1 GHz


1 GHz ~ 3 GHz

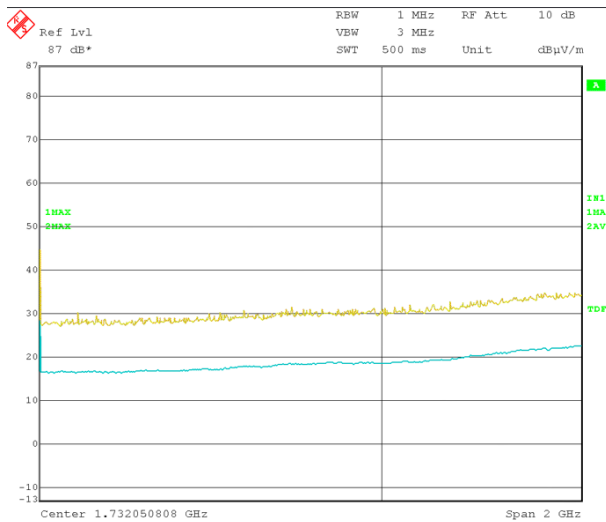


3 GHz ~ 7 GHz

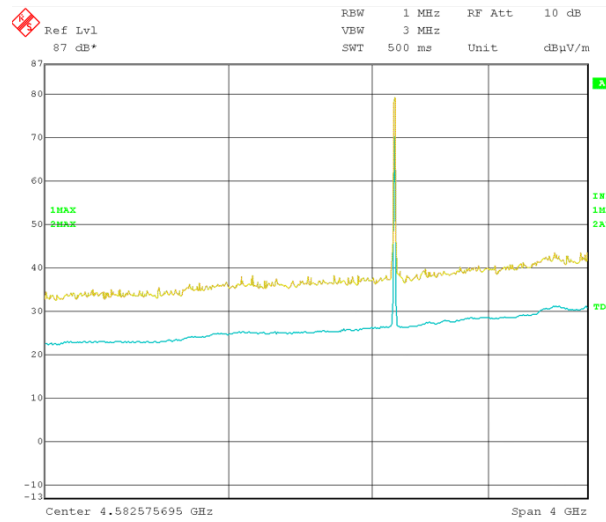


7 GHz ~ 18 GHz

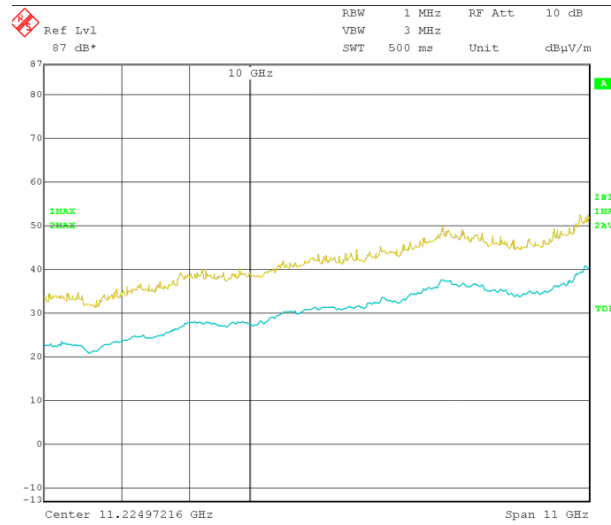

18 GHz ~ 26 GHz

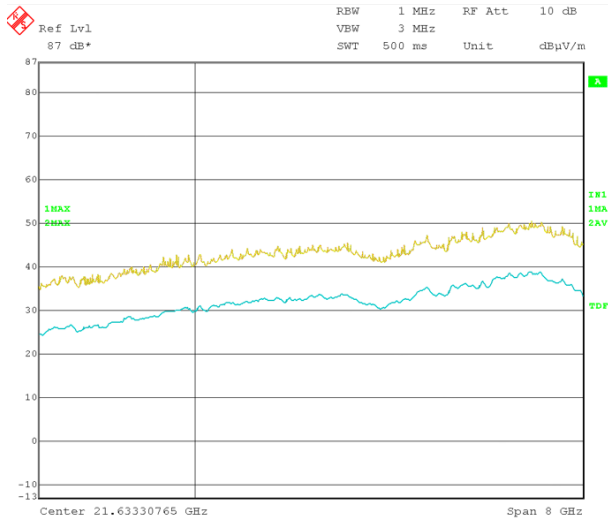


26 GHz ~ 40 GHz

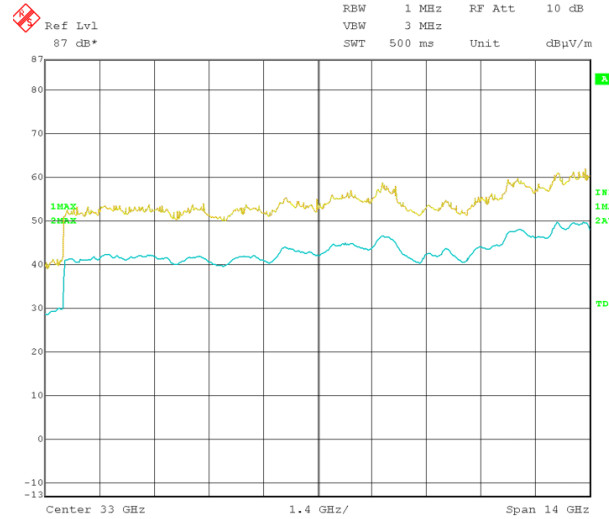


5 GHz Band4
Radiated Out of Band Emission (OOBE) Measurement
802.11a

CH Low(5 745 MHz)

Horizontal

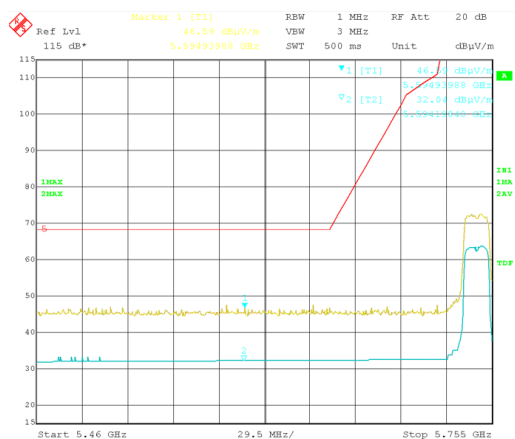


Vertical

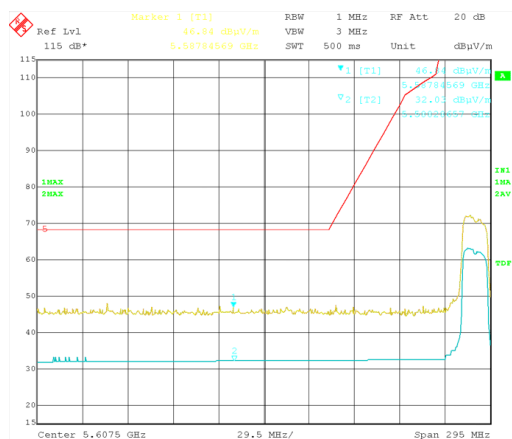


CH High(5 825 MHz)

Horizontal

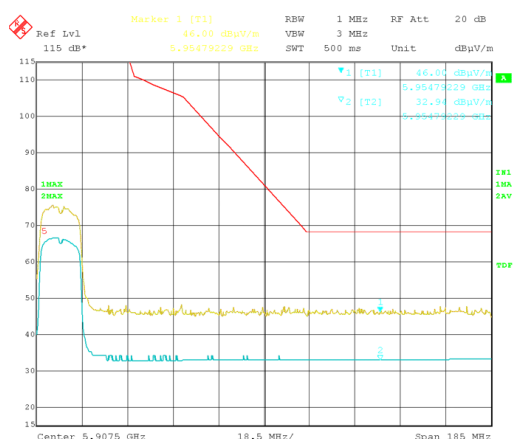


Vertical

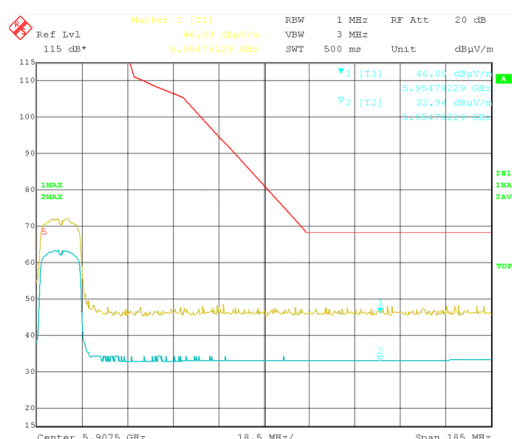


802.11n(HT20)

CH Low(5 745 MHz)

Horizontal

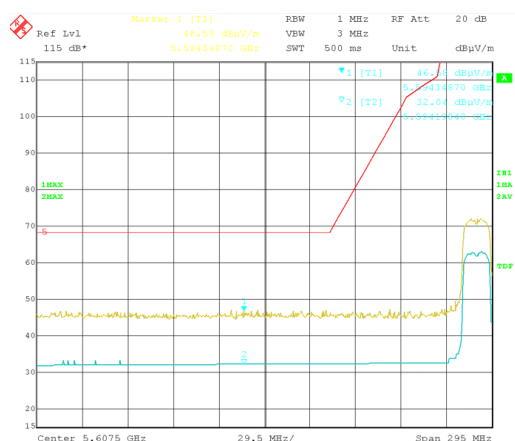


Vertical

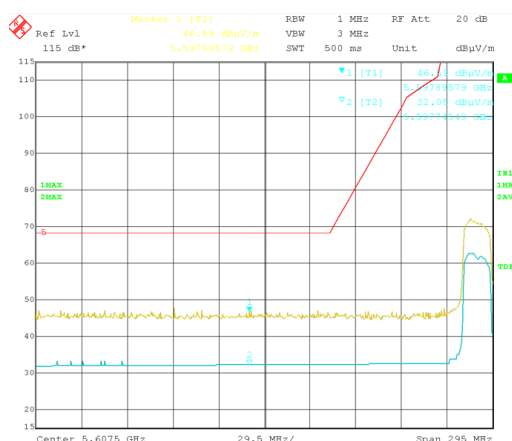


CH High(5 825 MHz)

Horizontal

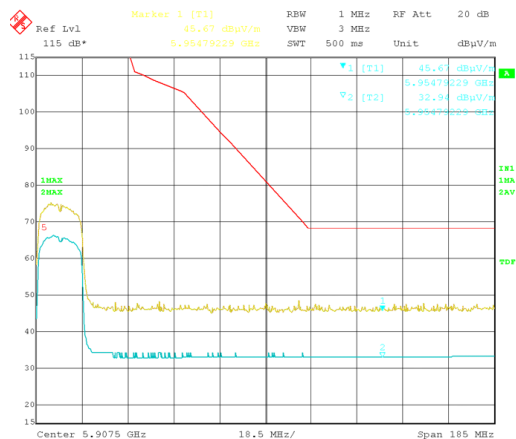


Vertical

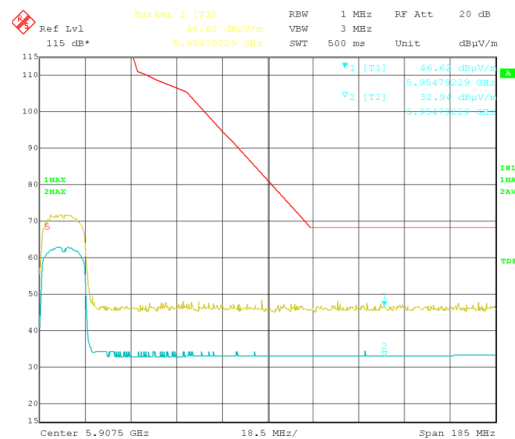


802.11n(HT40)

CH Low(5 755 MHz)

Horizontal

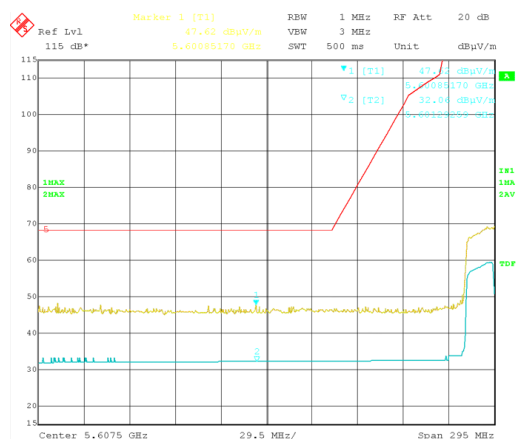


Vertical

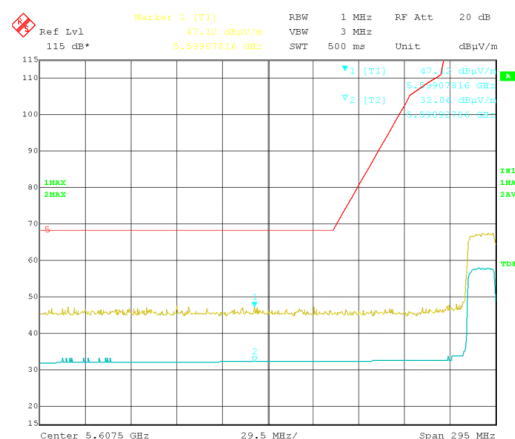


CH High(5 795 MHz)

Horizontal

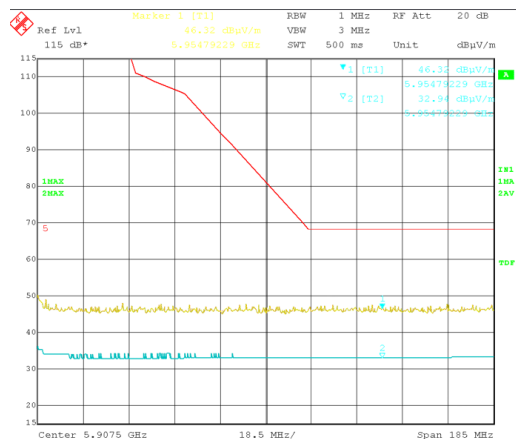


Vertical

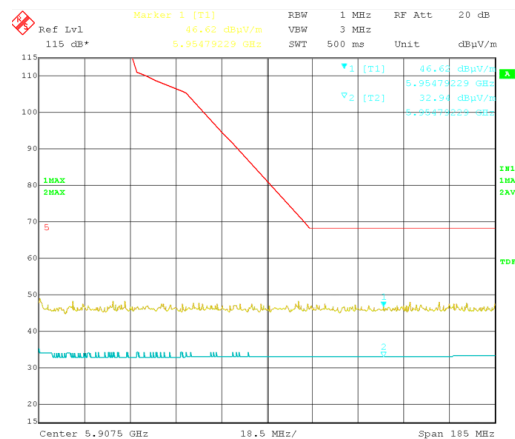


802.11ac(VHT20)

CH Low(5 745 MHz)

Horizontal

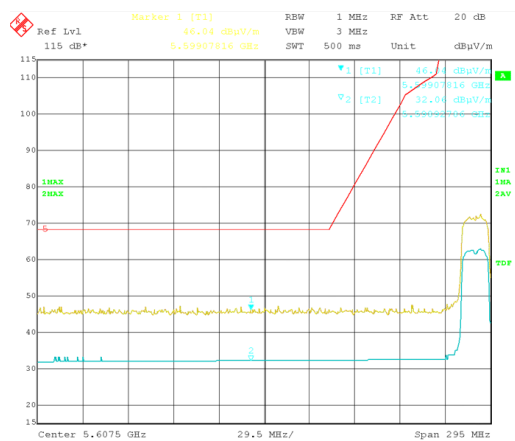


Vertical

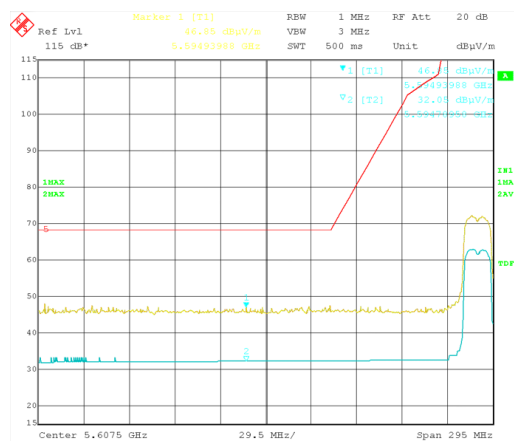


CH High(5 825 MHz)

Horizontal

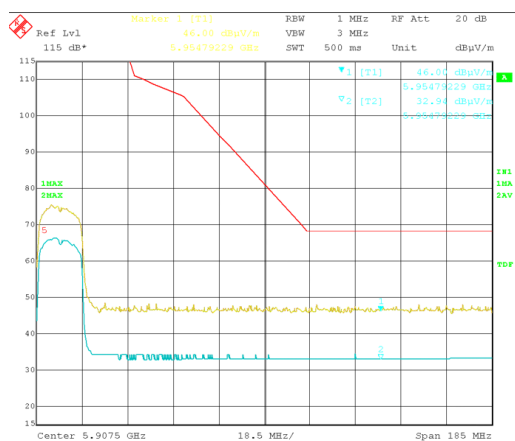


Vertical

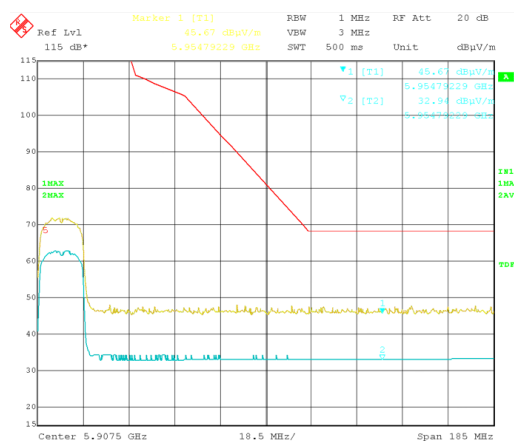


802.11ac(VHT40)

CH Low(5 755 MHz)

Horizontal

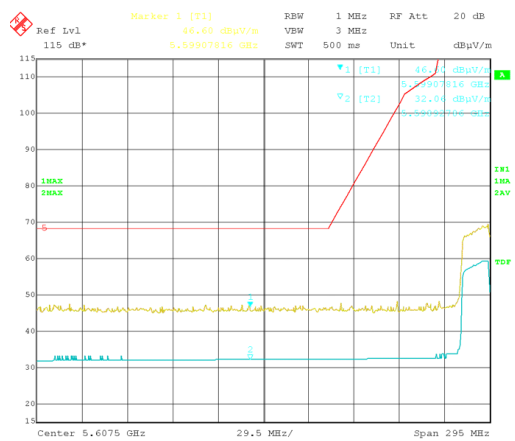


Vertical

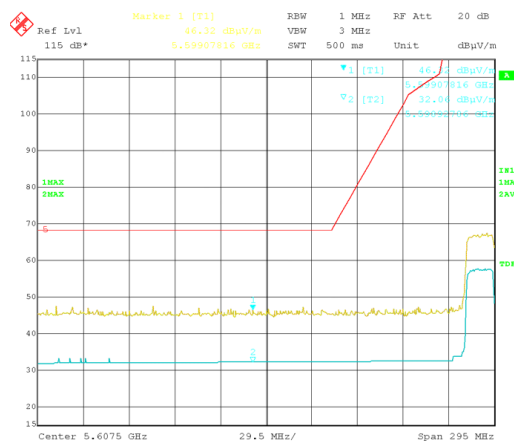


CH High(5 795 MHz)

Horizontal

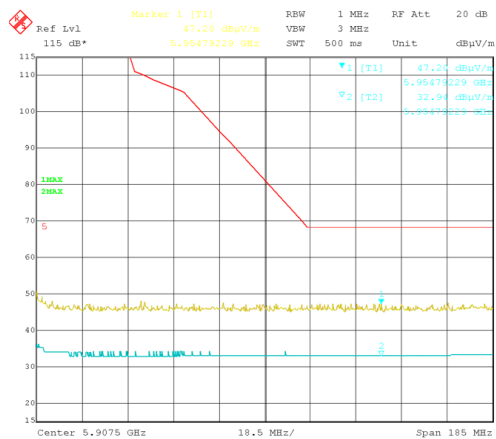


Vertical

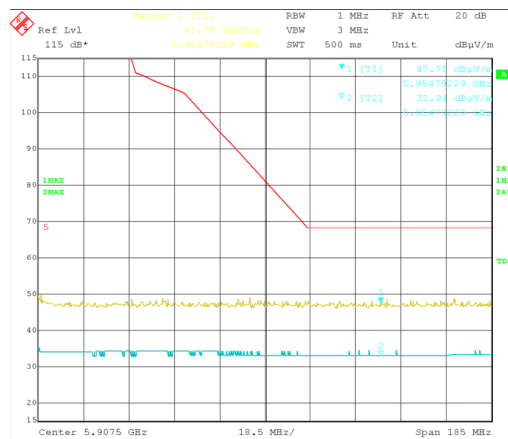


802.11ac(VHT80)

CH Middle(5 775 MHz)

Horizontal

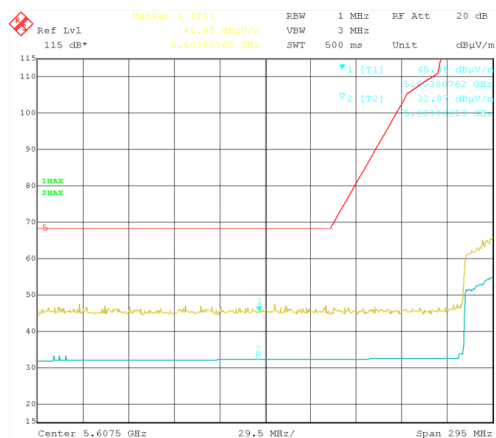


Vertical

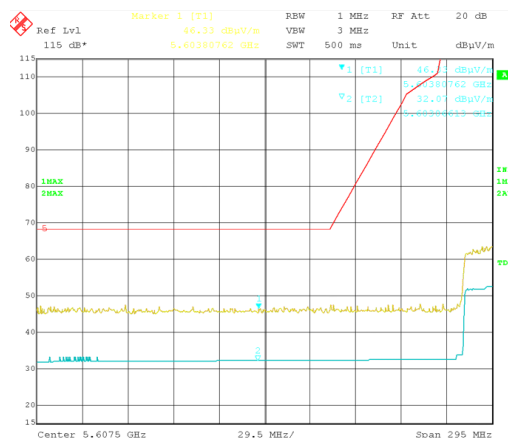


CH Middle(5 775 MHz)

Horizontal

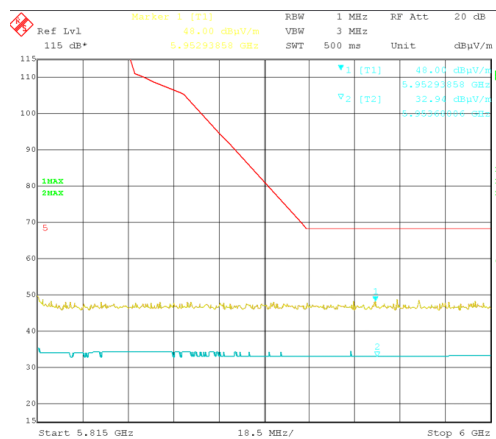


Vertical

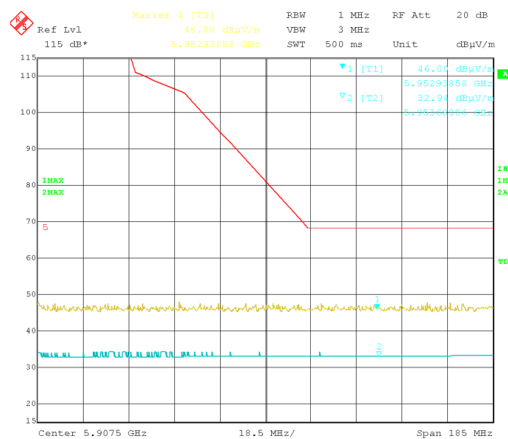


802.11a (The worst case only)

- Below 1 GHz




Horizontal

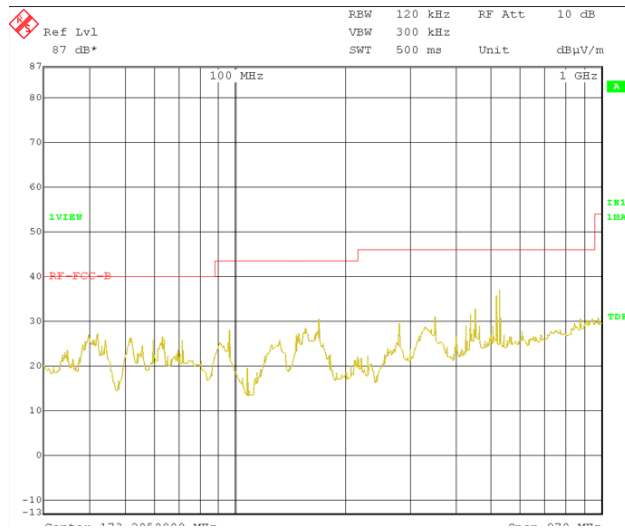


Vertical

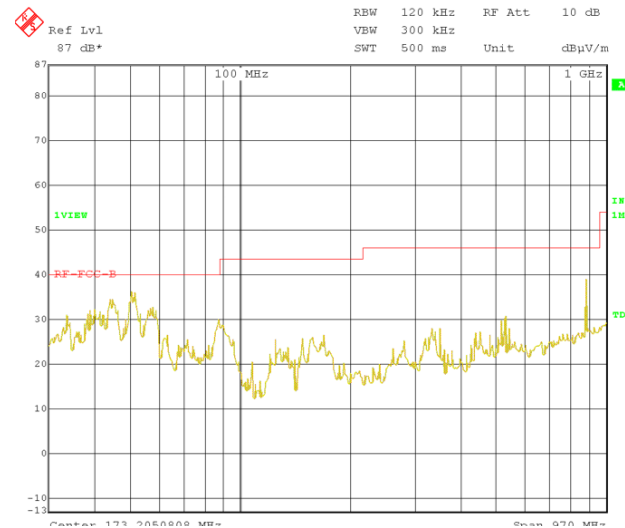

- Above 1 GHz

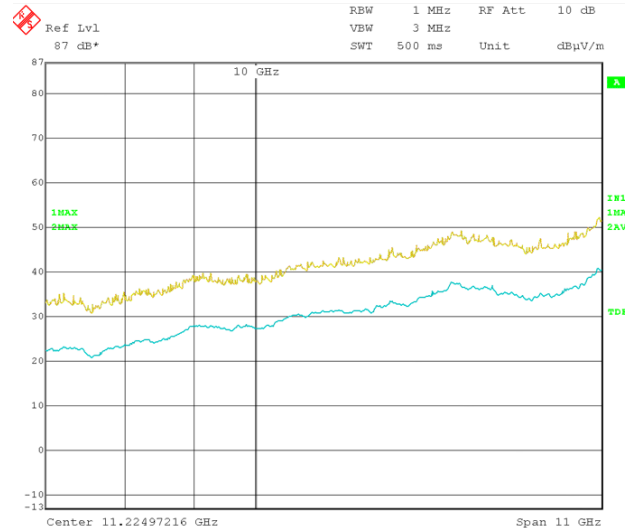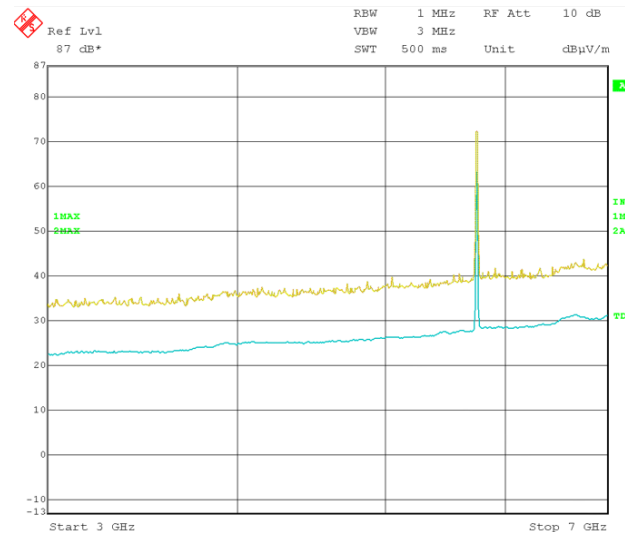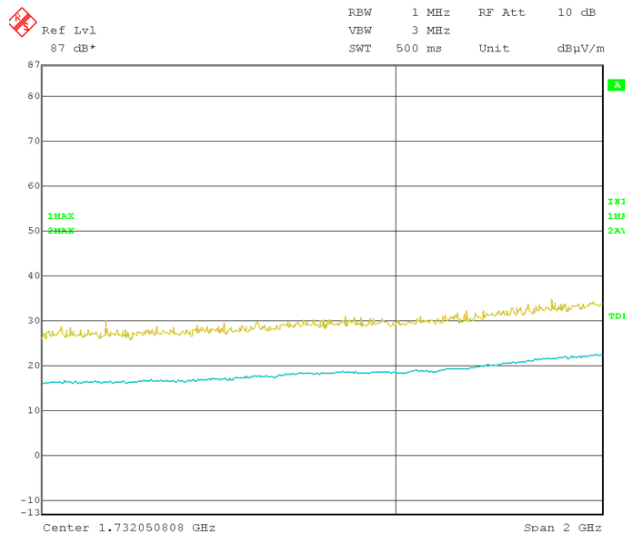

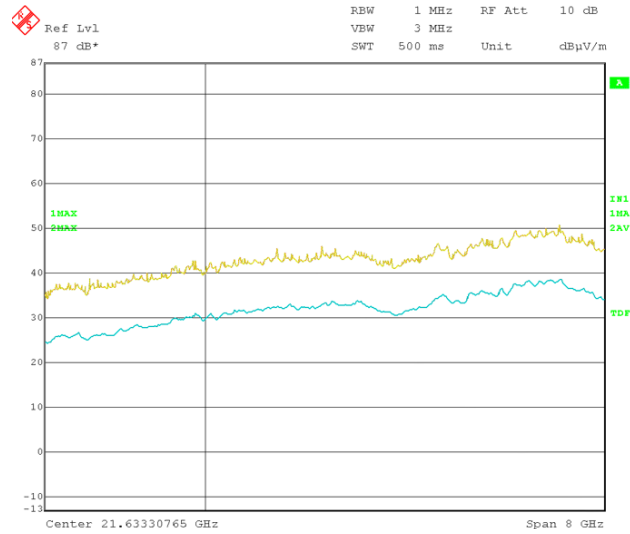

5.2 Antenna requirement

5.2.1 Standard applicable [FCC §15.203]

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that user a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The manufacturer may design the unit so that broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2.2 Antenna details

Frequency Band	Antenna Type	Gain [dBi]	Results
5 GHz	External Dipole antenna	3.5 dBi	Compliance