




IEEE 802.11n_20MHz_Channel 48

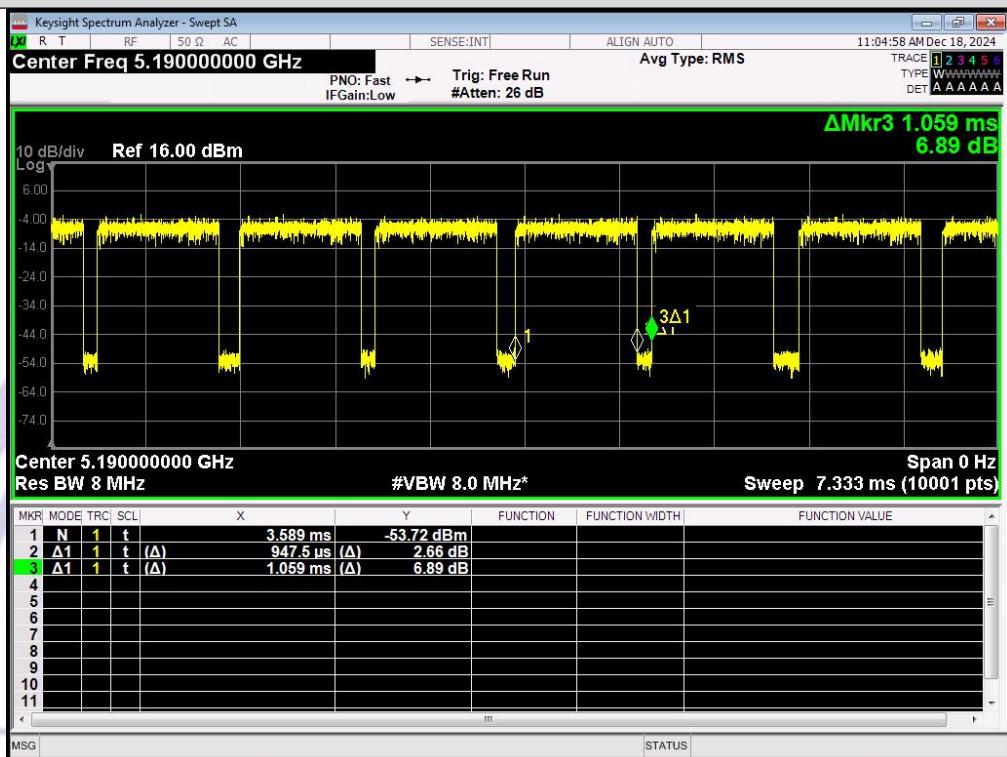


IEEE 802.11n_40MHz_Channel 38

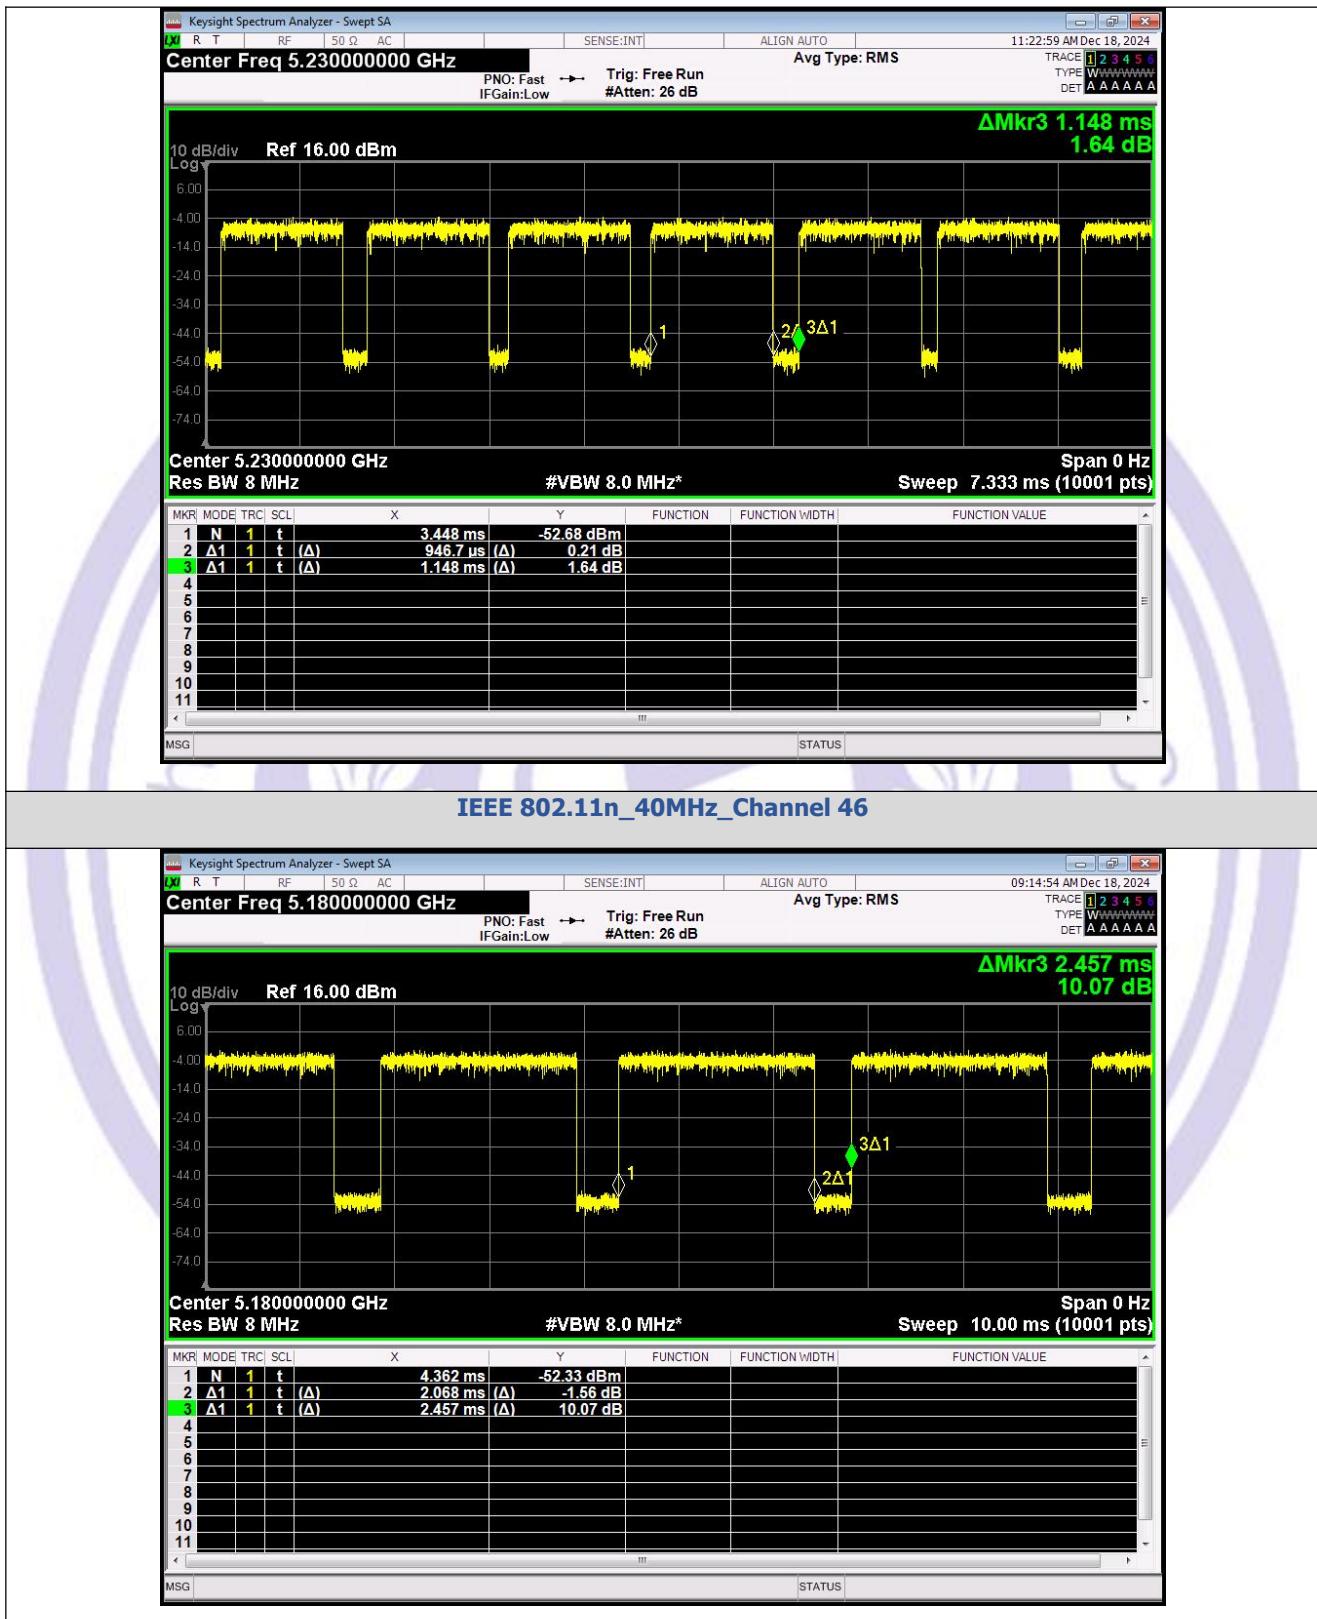


IEEE 802.11ac_20MHz_Channel 36

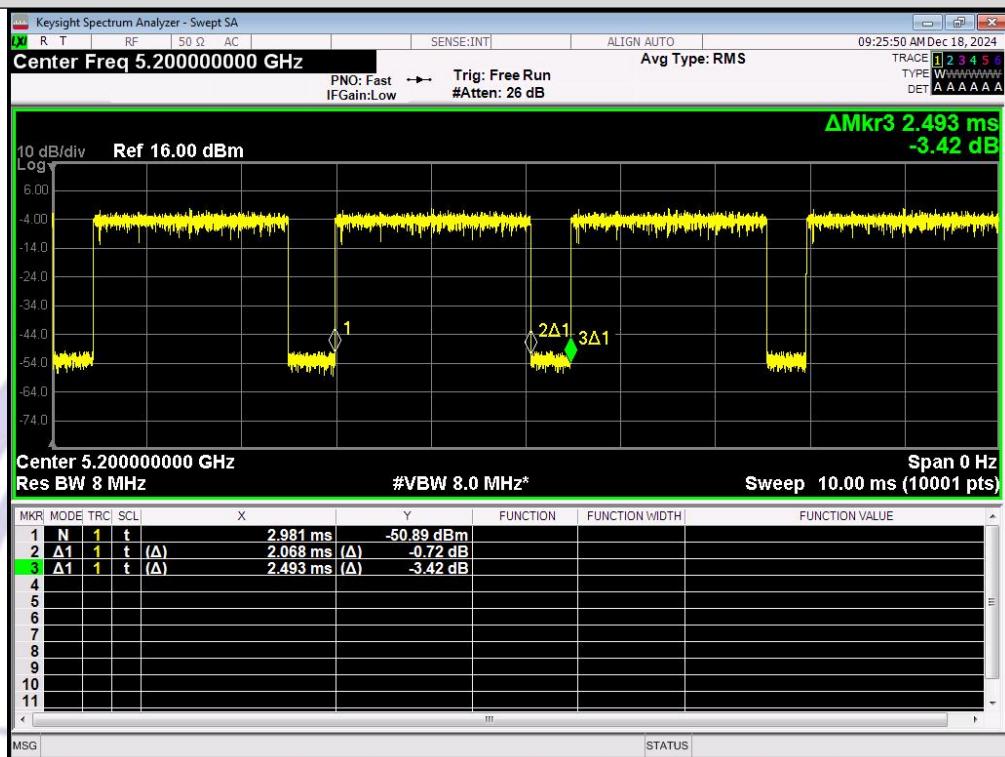


IEEE 802.11ac_20MHz_Channel 40

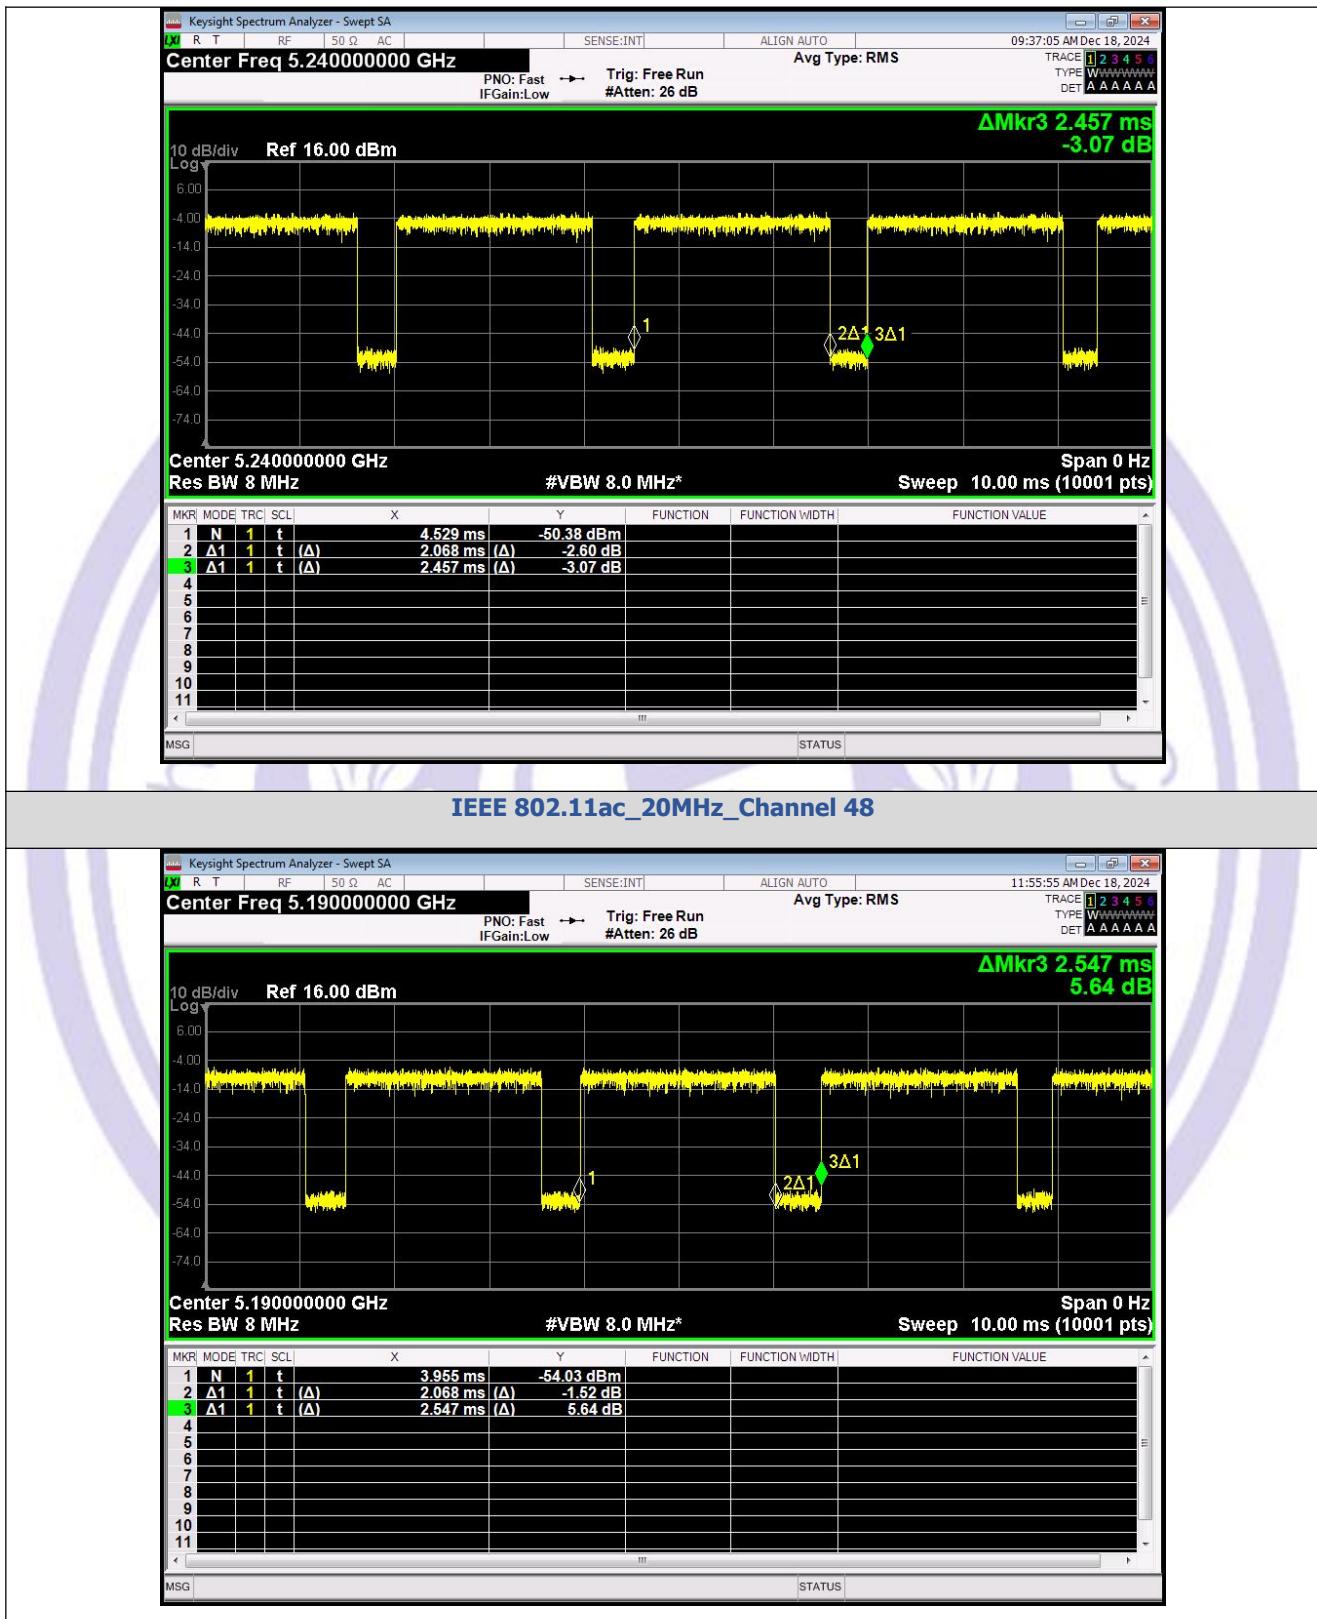


IEEE 802.11ac_40MHz_Channel 38

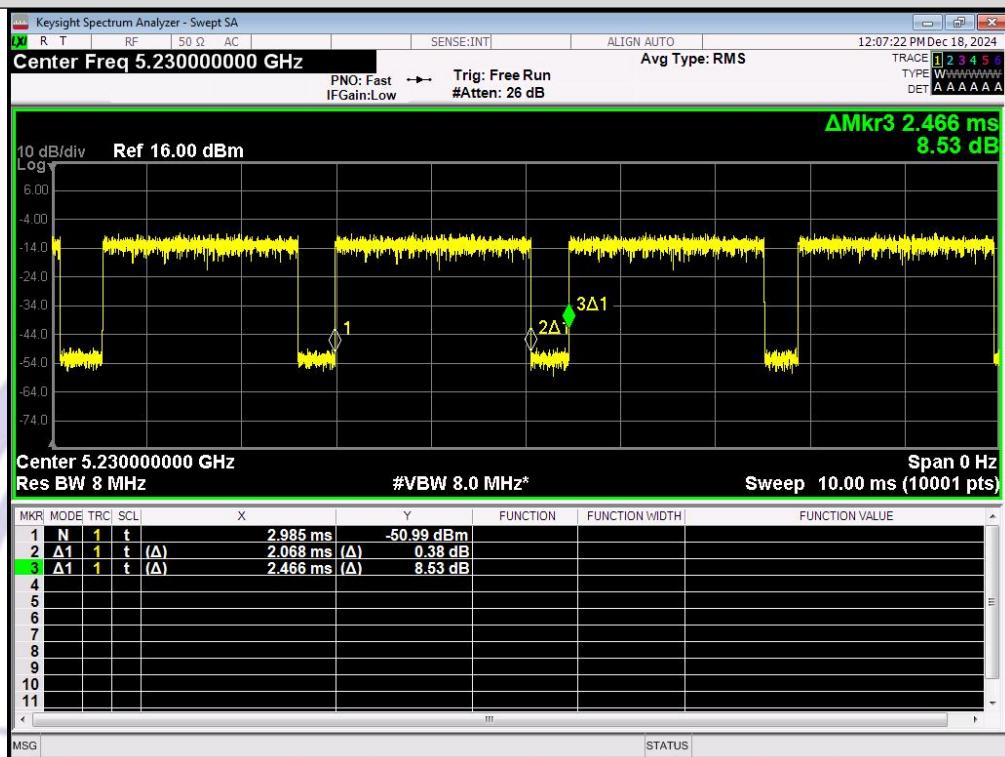


IEEE 802.11ac_40MHz_Channel 46

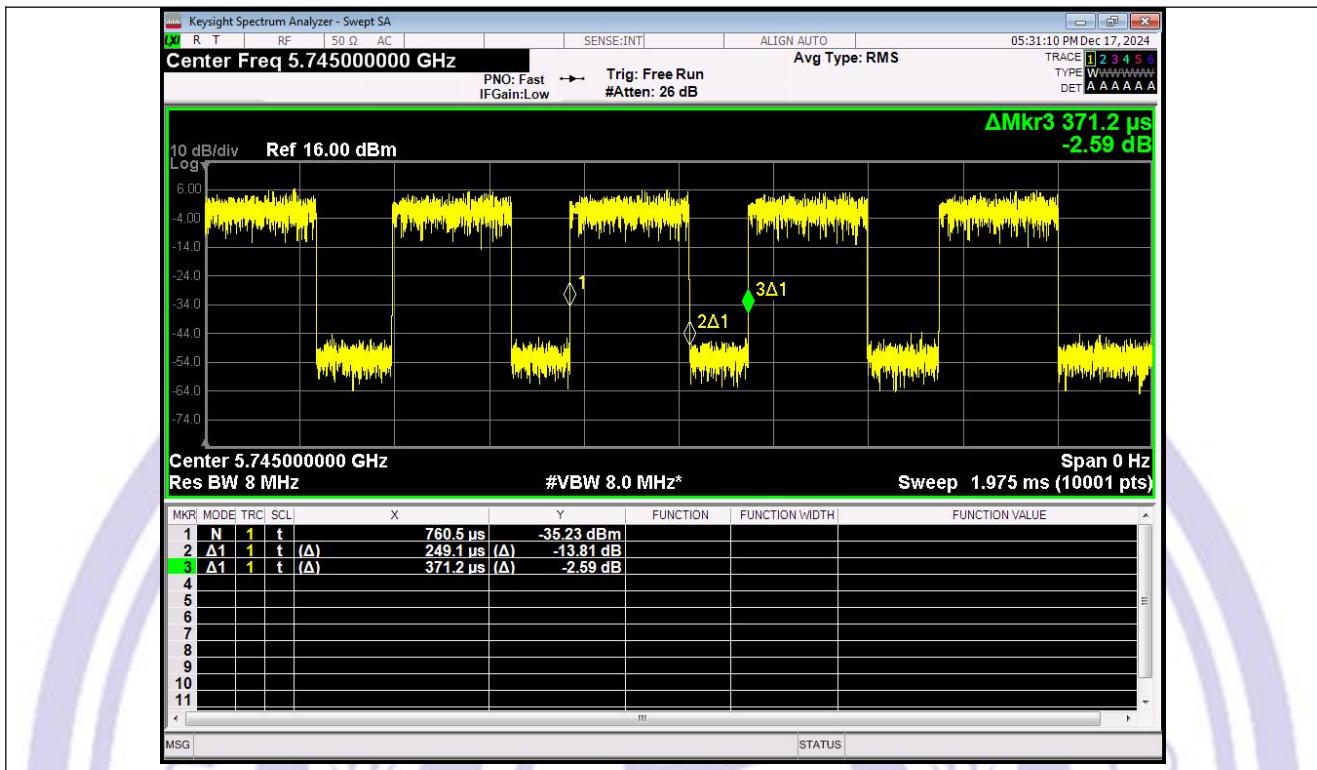


IEEE 802.11a_20MHz_Channel 149

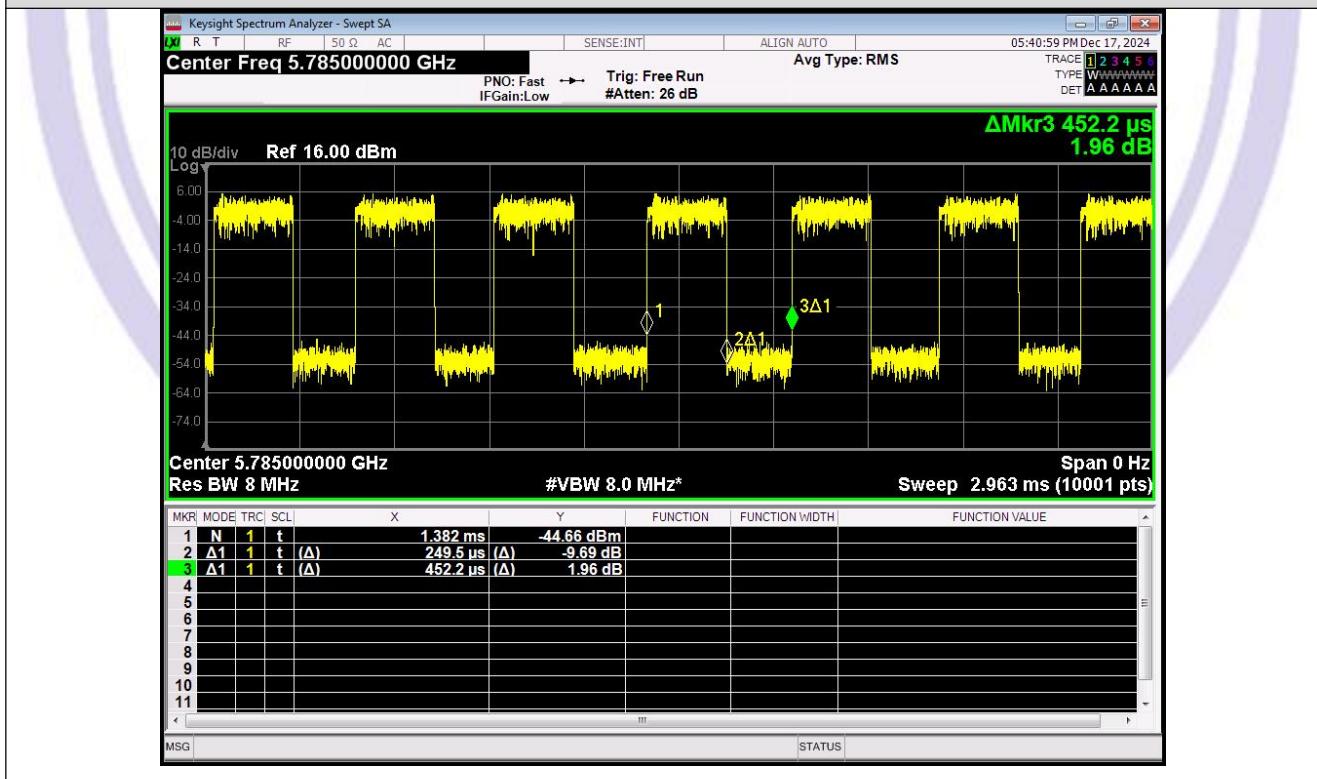


IEEE 802.11a_20MHz_Channel 157

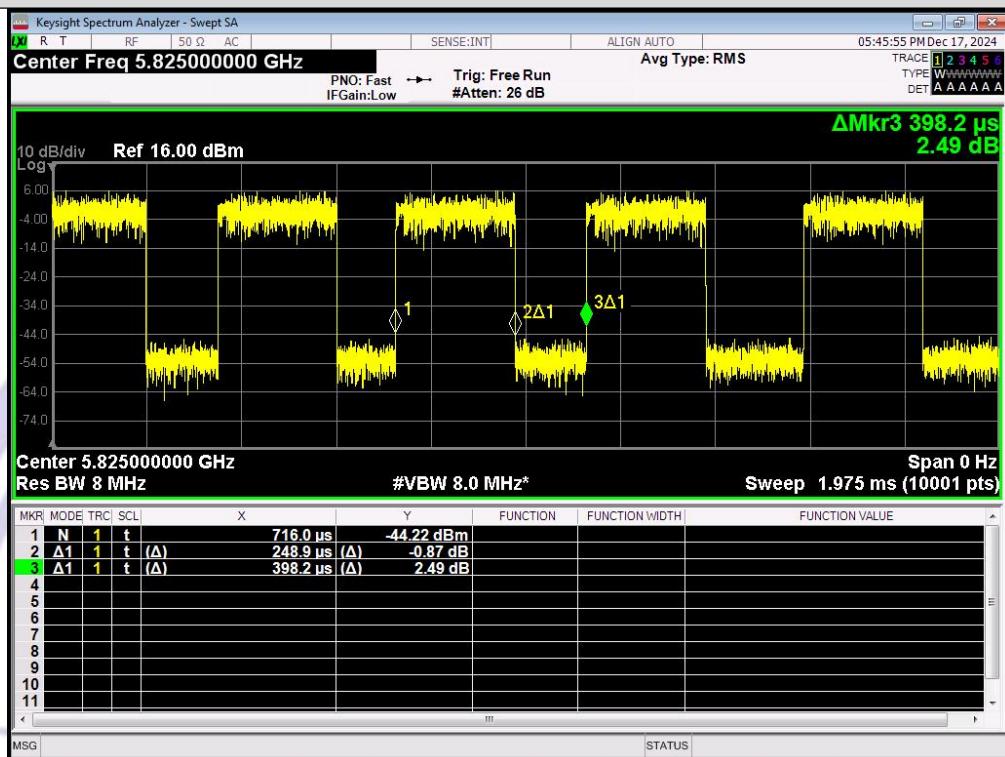


IEEE 802.11a_20MHz_Channel 165

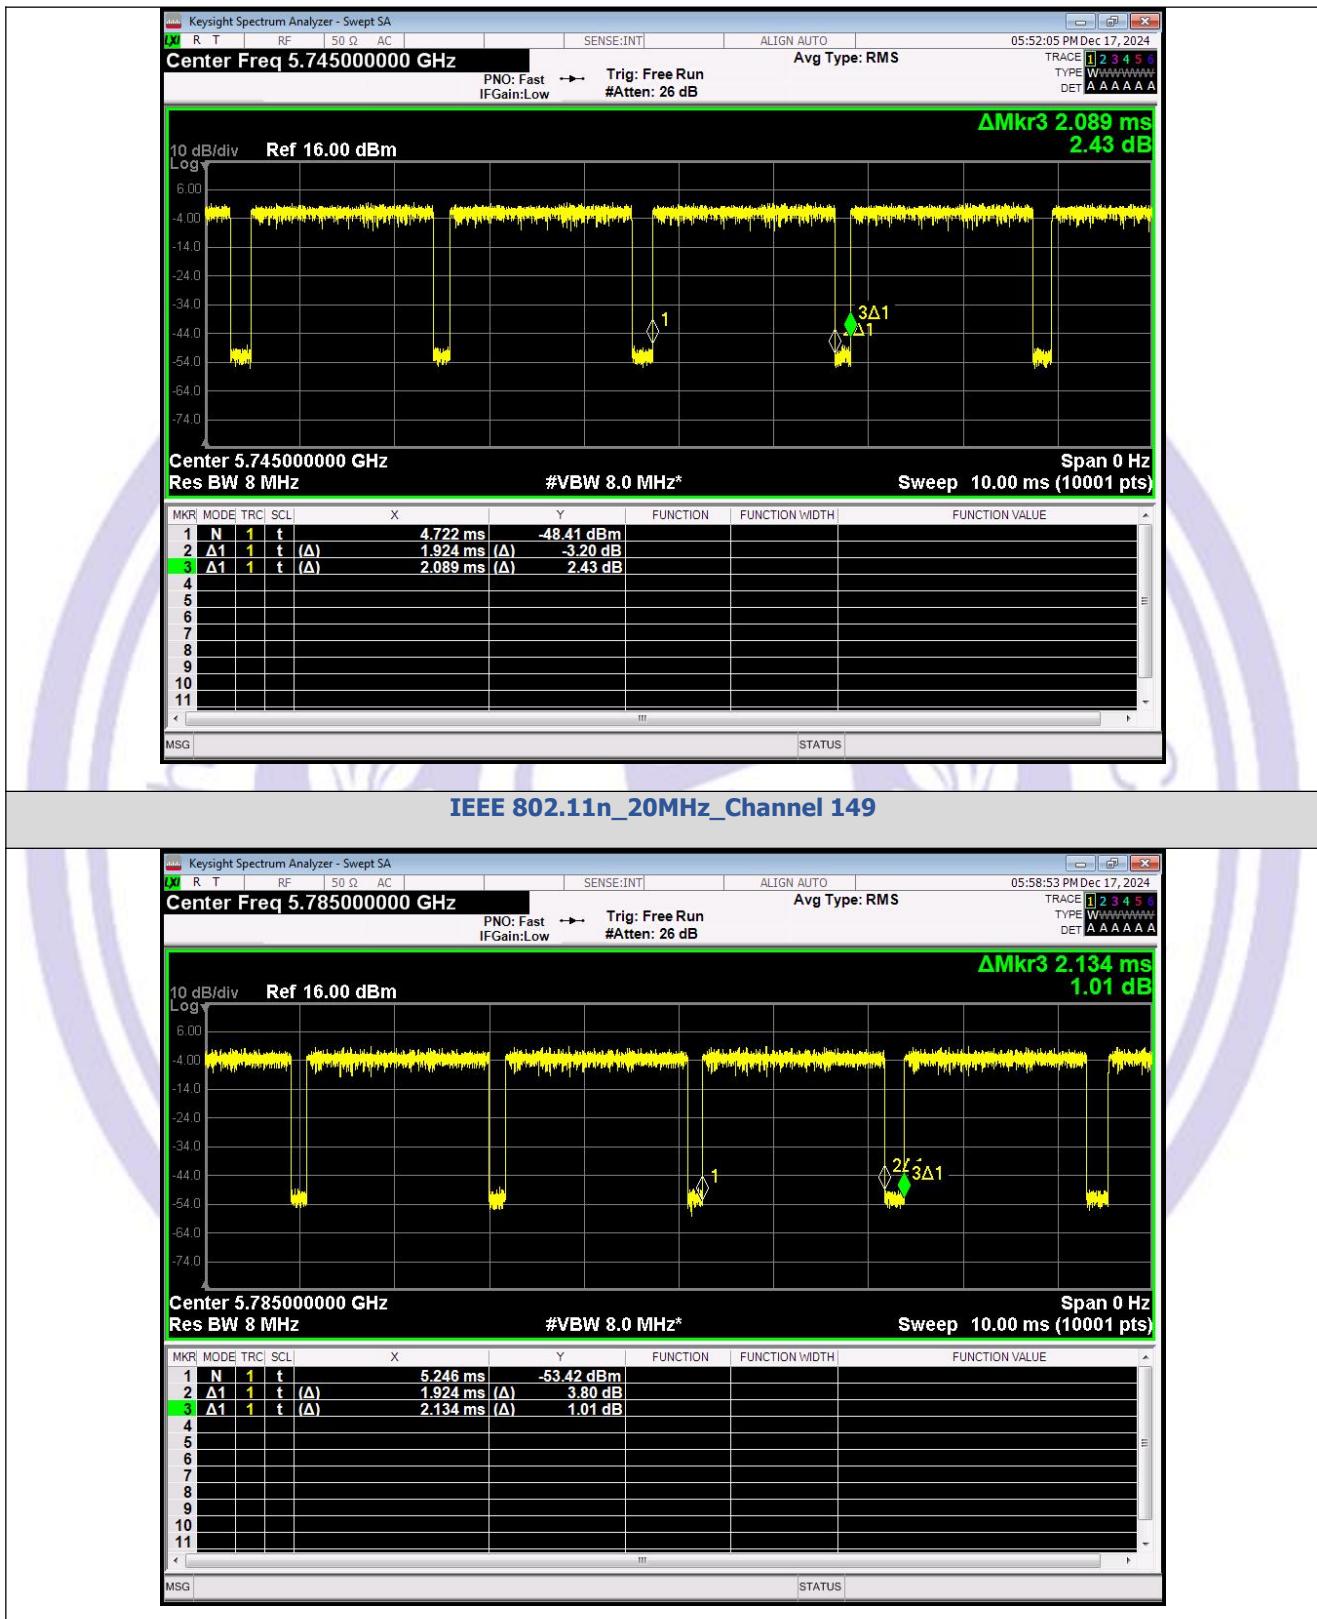


IEEE 802.11n_20MHz_Channel 157

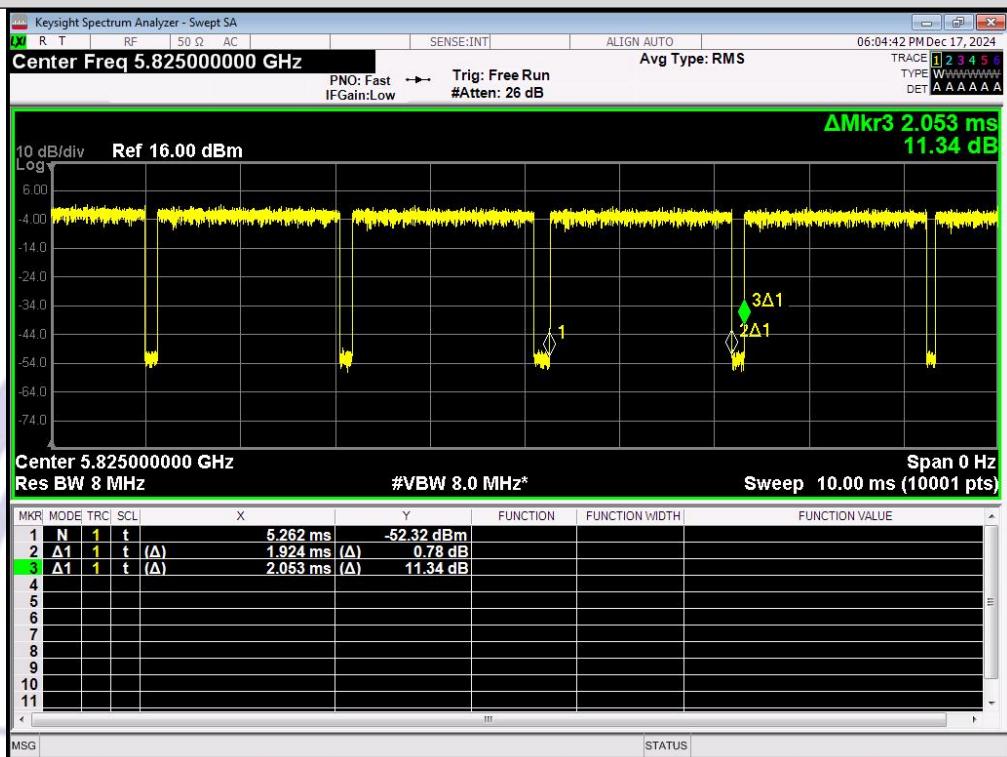


IEEE 802.11n_20MHz_Channel 165

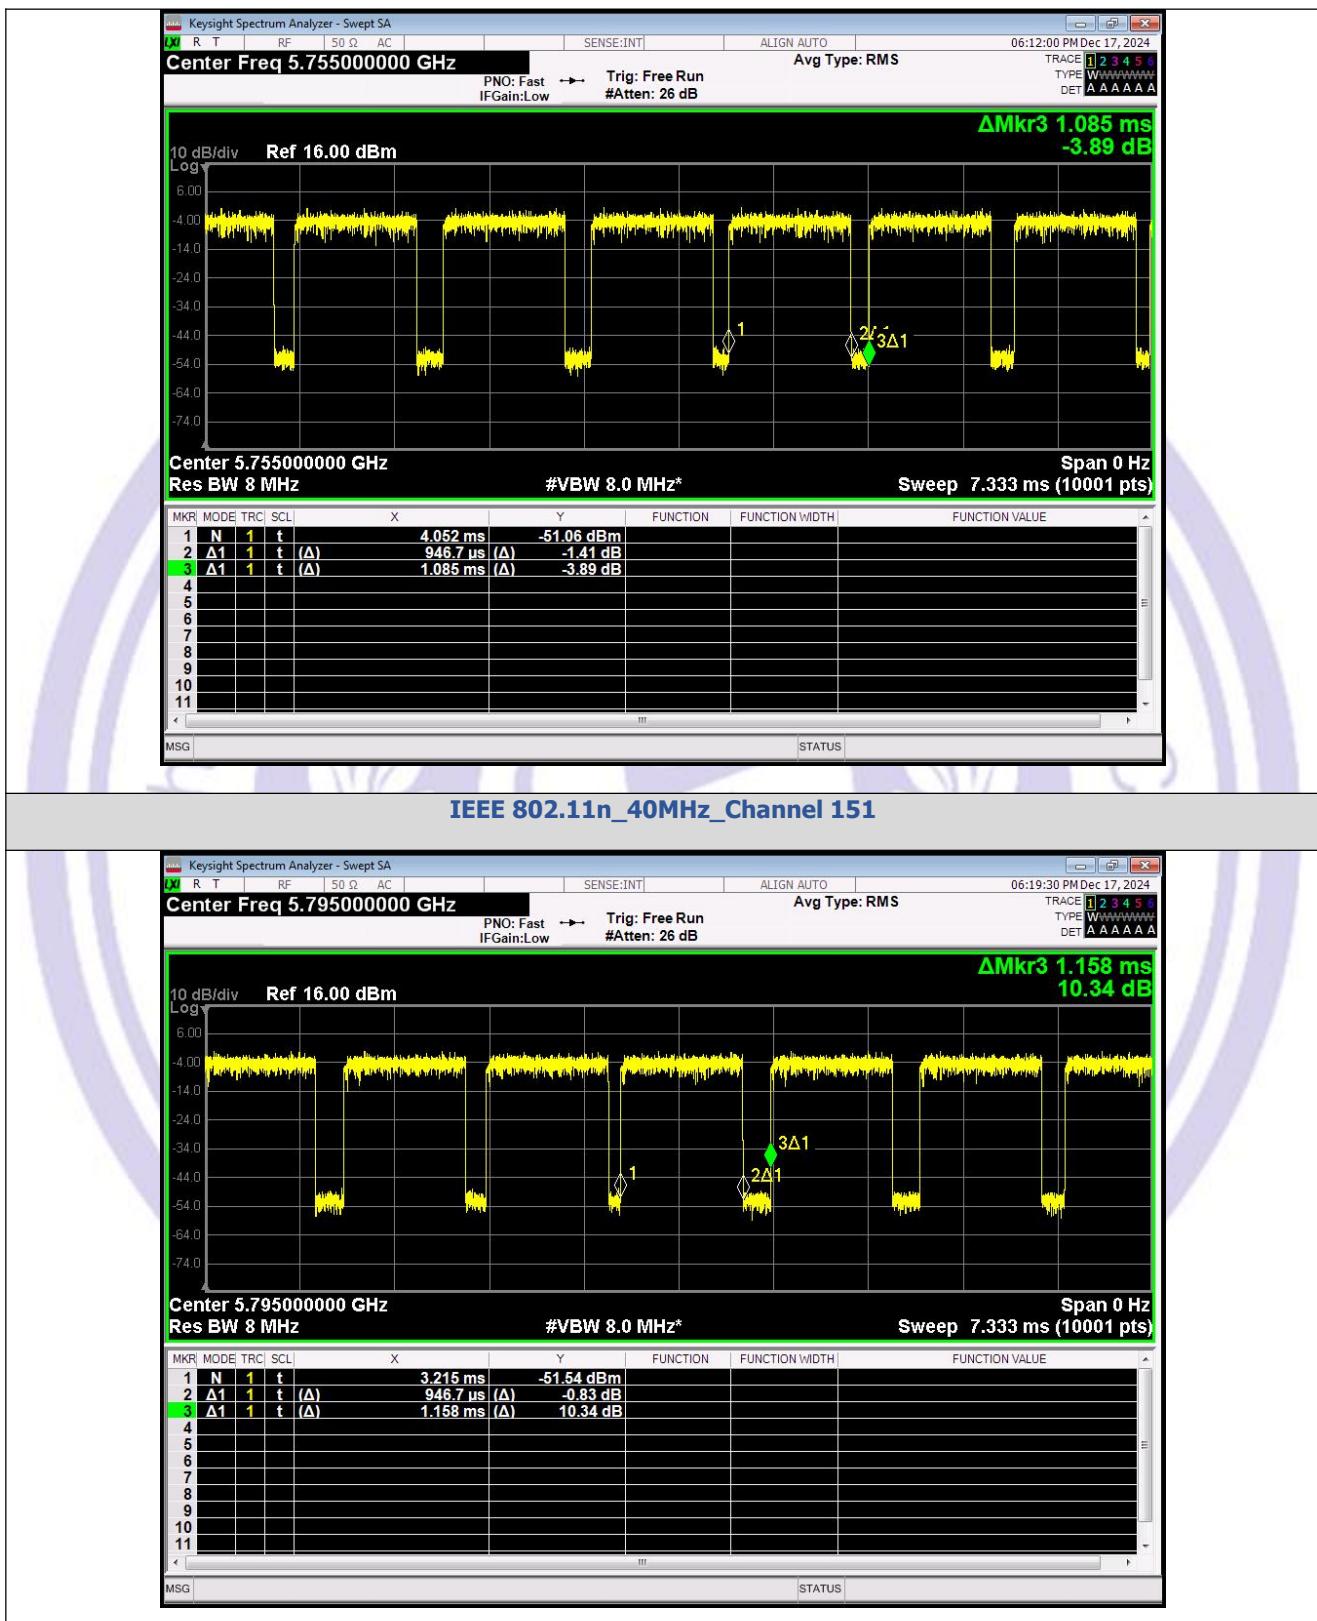


IEEE 802.11n_40MHz_Channel 159

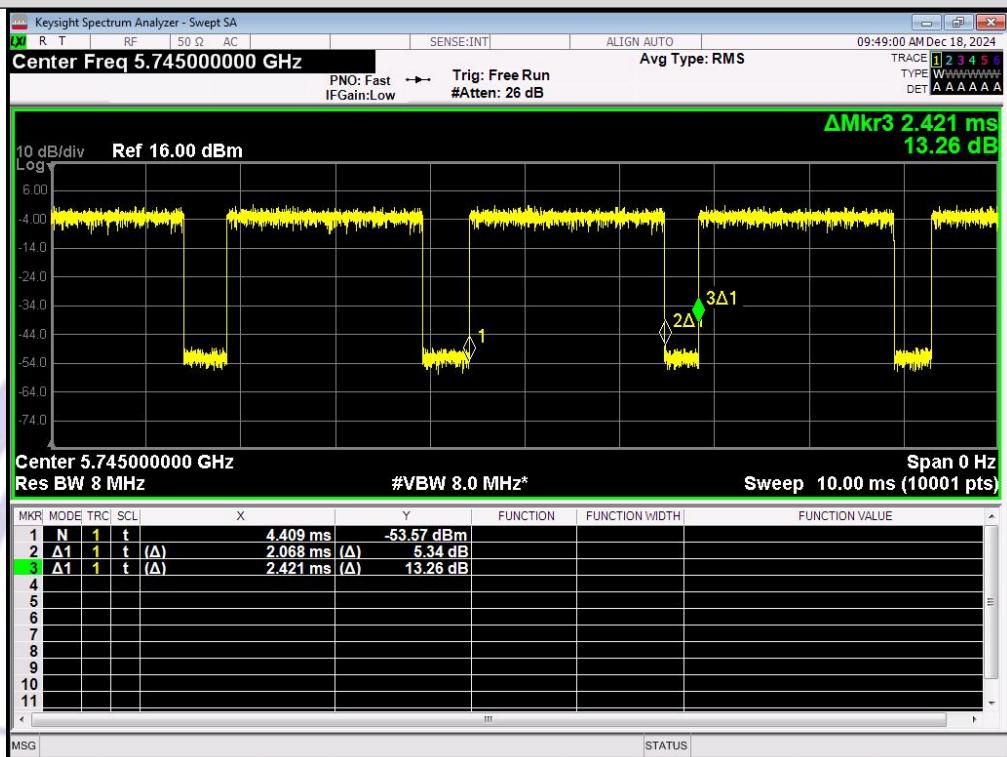


IEEE 802.11ac_20MHz_Channel 149

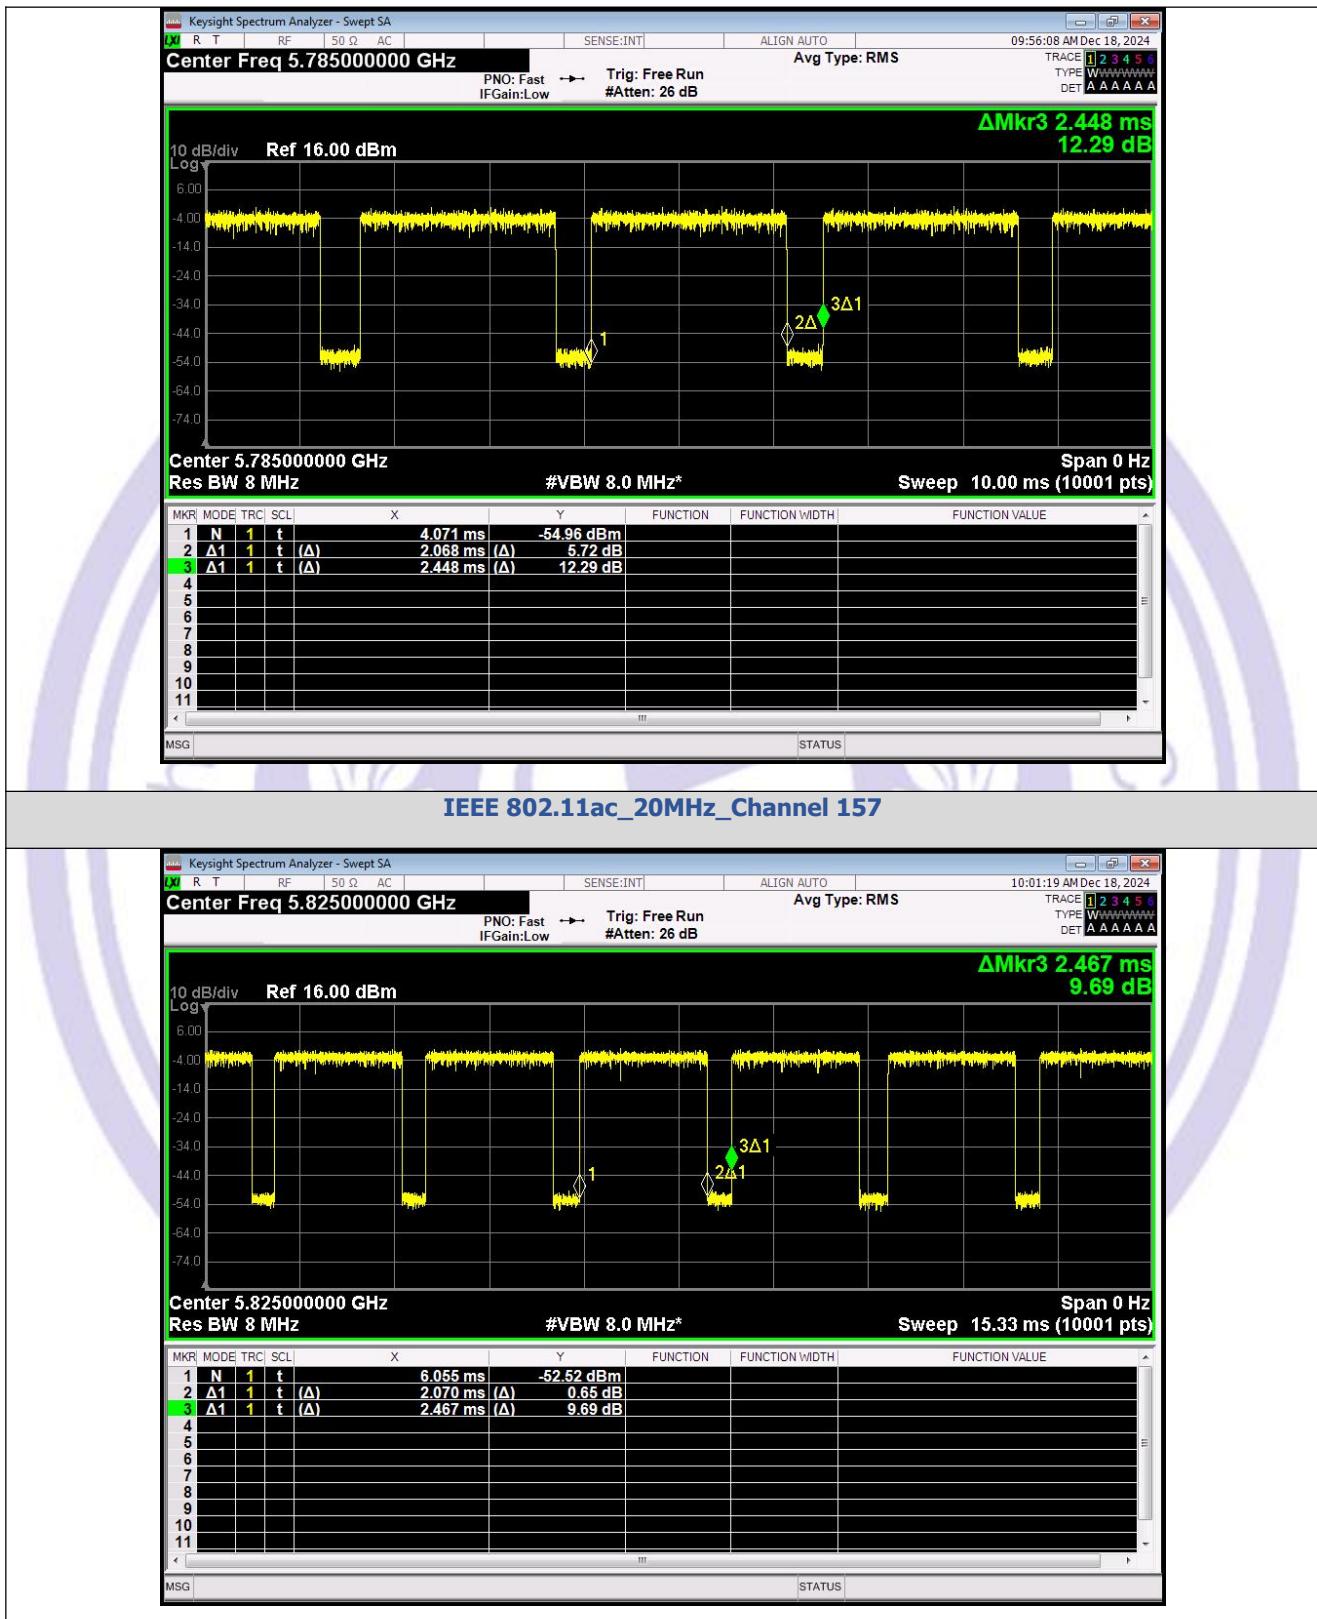

IEEE 802.11ac_20MHz_Channel 165

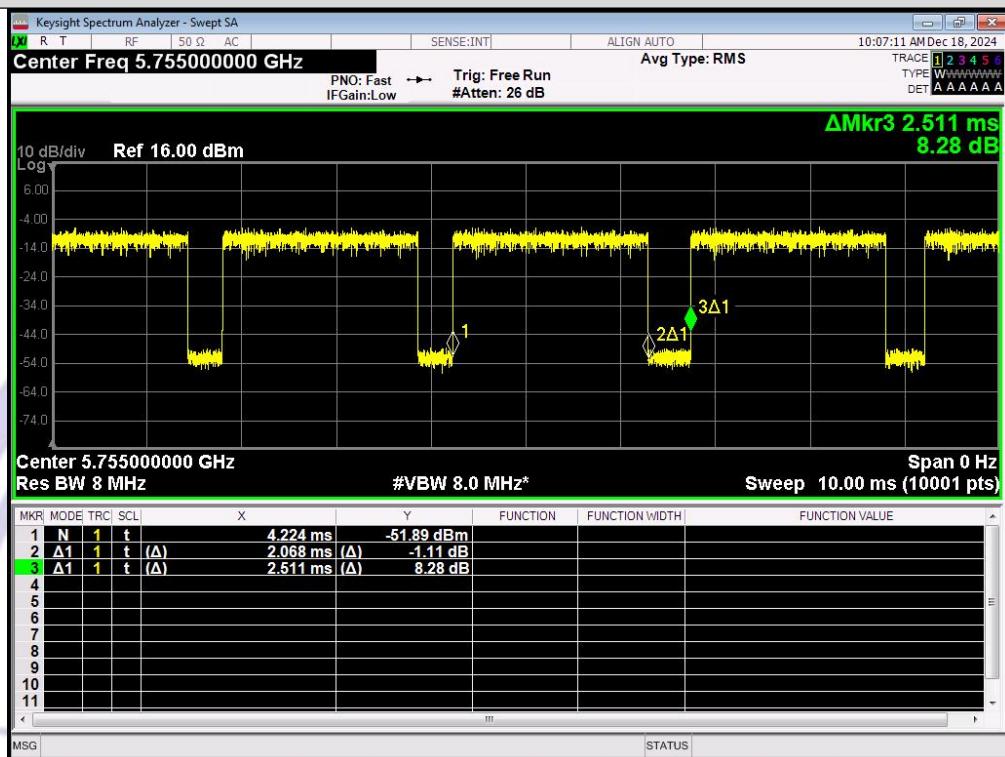

IEEE 802.11ac_40MHz_Channel 151

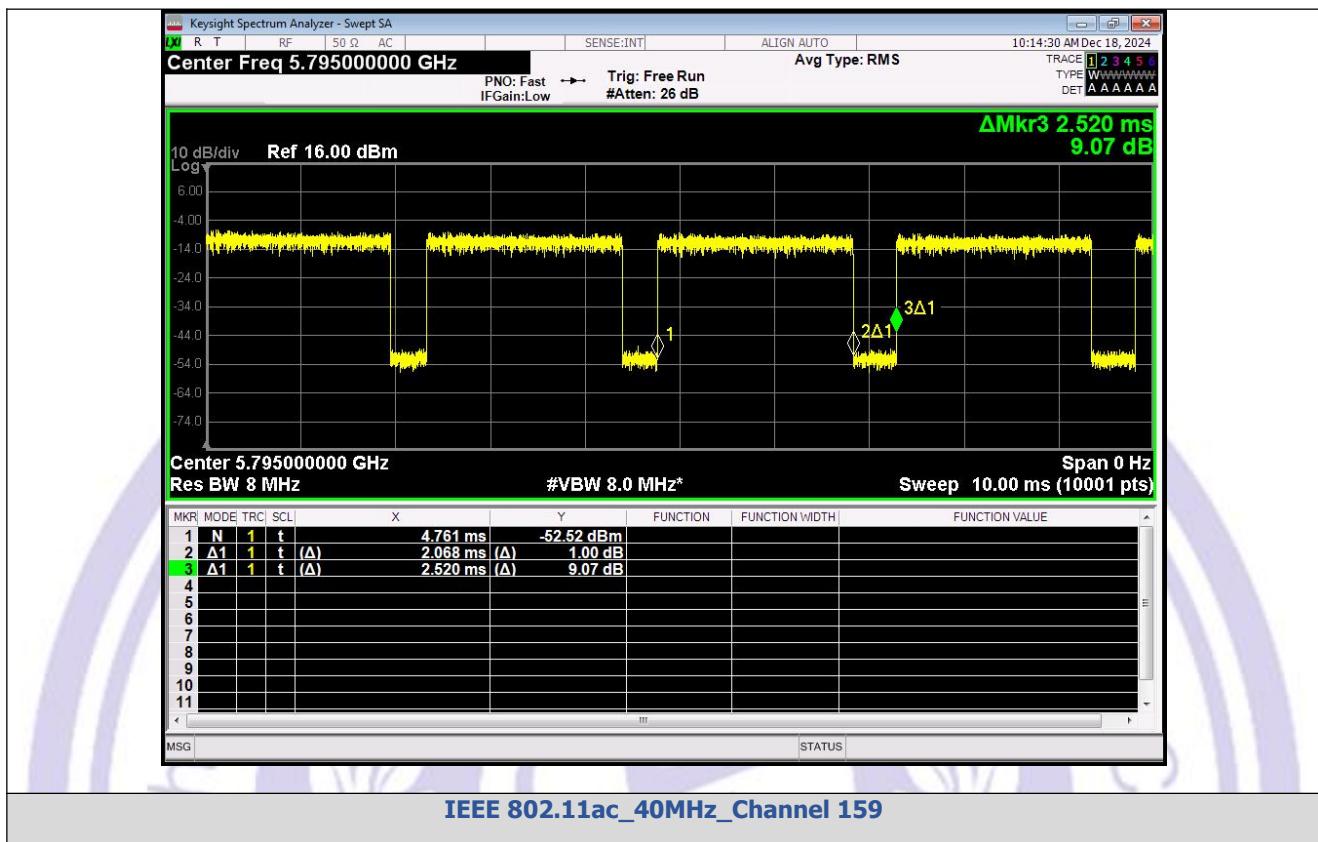

14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	<p>1) 15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>According to RSS-GEN section 6.8</p> <p>The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.</p> <p>For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).</p> <p>When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.</p> <p>The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.</p>

14.2 Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is -3.00 dBi(WIFI 5.2G); -2.20 dBi(WIFI5.8G). It complies with the standard requirement.

15 TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

