

FCC Part 15C TEST REPORT

FCC ID: 2BHJP-CXZ5AB

Product : carplay
CXZ506, CXZ503, CXZ505, CXZ507,
CXZ508, CXZ509, CXZ510, CXZ511,
CXZ512, CXZ513, CXZ515, CXZ516,
CXZ517, CXZ518, CXZ519, CXZ520,
Model Name : CXZ521, CXZ522, CXZ523, CXZ525,
CXZ526, CXZ527, CXZ528, CXZ529,
CXZ530, CXZ531, CXZ532, CXZ533,
CXZ535, CXZ536, CXZ537, CXZ538,
CXZ539
Brand : N/A
Report No. : NCT24029552-2

Prepared for
Dongguan Chenxin Zheng hardware plastic technology Co., LTD
No. 78, Qinglin Road, Qingxi Town, Dongguan City, China

Prepared by
Shenzhen NCT Testing Technology Co., Ltd.
A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street,
Baoan District, Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Dongguan Chenxin Zheng hardware plastic technology Co., LTD
Address : No. 78, Qinglin Road, Qingxi Town, Dongguan City, China
Manufacture's name : Dongguan Chenxin Zheng hardware plastic technology Co., LTD
Address : No. 78, Qinglin Road, Qingxi Town, Dongguan City, China
Product name : carplay
Model name : CXZ506
Additional model : CXZ503, CXZ505, CXZ507, CXZ508, CXZ509, CXZ510, CXZ511, CXZ512, CXZ513, CXZ515, CXZ516, CXZ517, CXZ518, CXZ519, CXZ520, CXZ521, CXZ522, CXZ523, CXZ525, CXZ526, CXZ527, CXZ528, CXZ529, CXZ530, CXZ531, CXZ532, CXZ533, CXZ535, CXZ536, CXZ537, CXZ538, CXZ539
Additional model : Only the model name and color are different, PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013
Date of test : Jun. 25 ~ Aug. 07, 2024
Date of Issue : Aug. 07, 2024
Test Result : Pass

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

Hugh Zhang
Hugh Zhang / Engineer

Technical Manager:

Henry Wang
Henry Wang / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
2.1 TEST SITE	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF E.U.T.	7
3.2 CHANNEL LIST	8
3.3 TEST SETUP CONFIGURATION	9
3.4 TEST MODE	9
4 EQUIPMENT DURING TEST	10
4.1 EQUIPMENTS LIST	10
4.2 MEASUREMENT UNCERTAINTY	12
4.3 DESCRIPTION OF SUPPORT UNITS	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION	14
5.7 CONDUCTED EMISSION TEST RESULT	14
6 RADIATED SPURIOUS EMISSIONS	17
6.1 EUT OPERATION	17
6.2 TEST SETUP	17
6.3 SPECTRUM ANALYZER SETUP	19
6.4 TEST PROCEDURE	20
6.5 SUMMARY OF TEST RESULTS	21
7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	30
7.1 TEST PROCEDURE	30
7.2 TEST RESULT	31

8 6DB BANDWIDTH MEASUREMENT & 99% OCB TEST	33
8.1 TEST PROCEDURE	33
8.2 TEST RESULT	33
9 MAXIMUM PEAK OUTPUT POWER	35
9.1 TEST PROCEDURE	35
9.2 TEST RESULT	36
10 POWER SPECTRAL DENSITY	36
10.1 TEST PROCEDURE	37
10.2 TEST RESULT	37
11 ANTENNA APPLICATION	39
11.1 ANTENNA REQUIREMENT	39
11.2 RESULT	39
12 TEST SETUP	39
13 EUT PHOTOS	41

2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth & 99% OCB	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203 15.247 (c)	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

2.1 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

3 General Information

3.1 General Description of E.U.T.

Product Name	:	carplay
Model Name	:	CXZ506
Sample ID	:	N/A
Sample(s) Status	:	Engineer sample
Additional model	:	CXZ503, CXZ505, CXZ507, CXZ508, CXZ509, CXZ510, CXZ511, CXZ512, CXZ513, CXZ515, CXZ516, CXZ517, CXZ518, CXZ519, CXZ520, CXZ521, CXZ522, CXZ523, CXZ525, CXZ526, CXZ527, CXZ528, CXZ529, CXZ530, CXZ531, CXZ532, CXZ533, CXZ535, CXZ536, CXZ537, CXZ538, CXZ539
Model Different	:	Only the model name and color are different, PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Operating frequency	:	2402-2480MHz
Number of Channels	:	40 channels
Type of Modulation	:	GFSK
Antenna installation	:	PCB Antenna
Antenna Gain	:	-2.23dBi@2.4GHz
Power supply	:	DC 5V From Type-C Port
Hardware Version	:	N/A
Software Version	:	N/A
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant. 5G Wifi & BT share one antenna and cannot be transmitted at the same time.		

3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		


Note:

1. Test of channel was included the lowest, middle and highest frequency in highest data rate and to perform the test, then record on this report.

Channel	Frequency(MHz)
0	2402
19	2440
39	2480

3.3 Test Setup Configuration

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	insmod /mnt/system/ko/8733bs.ko
Power level setup	≤5dBm

4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	VN1-13S	004023	CRANAGE	2024/6/17	2025/6/16
Cable	RG223-1500MM	NA	RG	2024/6/17	2025/6/16

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2024/6/17	2025/6/16
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2024/6/17	2025/6/16
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	00042	SCHNWARZBECK	2024/6/17	2025/6/16
Spectrum Analyze (1GHz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/17	2025/6/16
Preamplifier (15GHz-40GHz)	BBV 9718D	0024	SCHNWARZBECK	2024/6/17	2025/6/16
Broadband Antenna (15GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNWARZBECK	2024/6/20	2025/6/19

Amplifier (9KHz-30MHz)	CVP 9222 C	00109	CHNWARZBECK	2024/6/18	2025/6/17
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2024/6/17	2025/6/16
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2024/6/17	2025/6/16
Power Sensor	TR1029-2	512364	Techoy	2024/6/17	2025/6/16
RF Swith	TR1029-1	512364	Techoy	2024/6/17	2025/6/16
Cable	DA800- 4000MM	NA	DA	2024/6/17	2025/6/16
Cable	DA800- 11000MM	NA	DA	2024/6/17	2025/6/16

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	carplay	N/A	CXZ506	N/A	EUT
E-2	Notebook	Lenovo	LN-A0403A3C	36001672	AE

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10: 2013
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :

Temperature:	: 23.2°C
Humidity:	: 51 % RH
Atmospheric Pressure:	: 101.12 kPa
Test Voltage	: AC 120V/60Hz

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

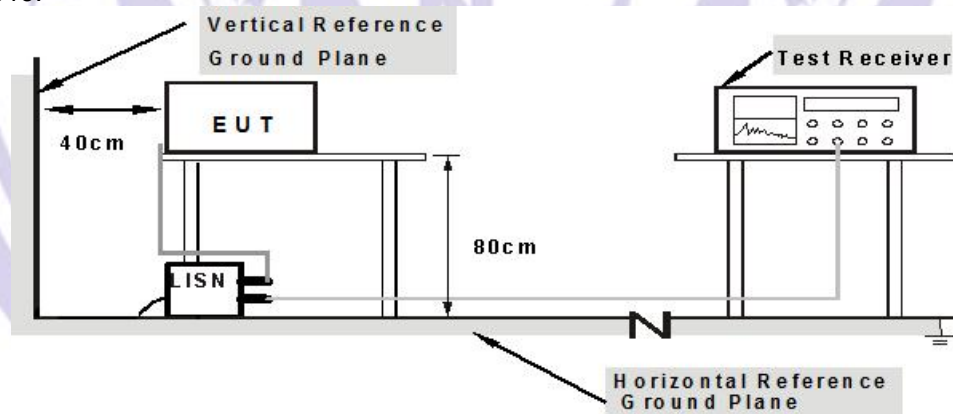

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.3 Test SET-UP (Block Diagram of Configuration)



5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

Pass


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	Middle	Phase :	L
----------	--------	---------	---

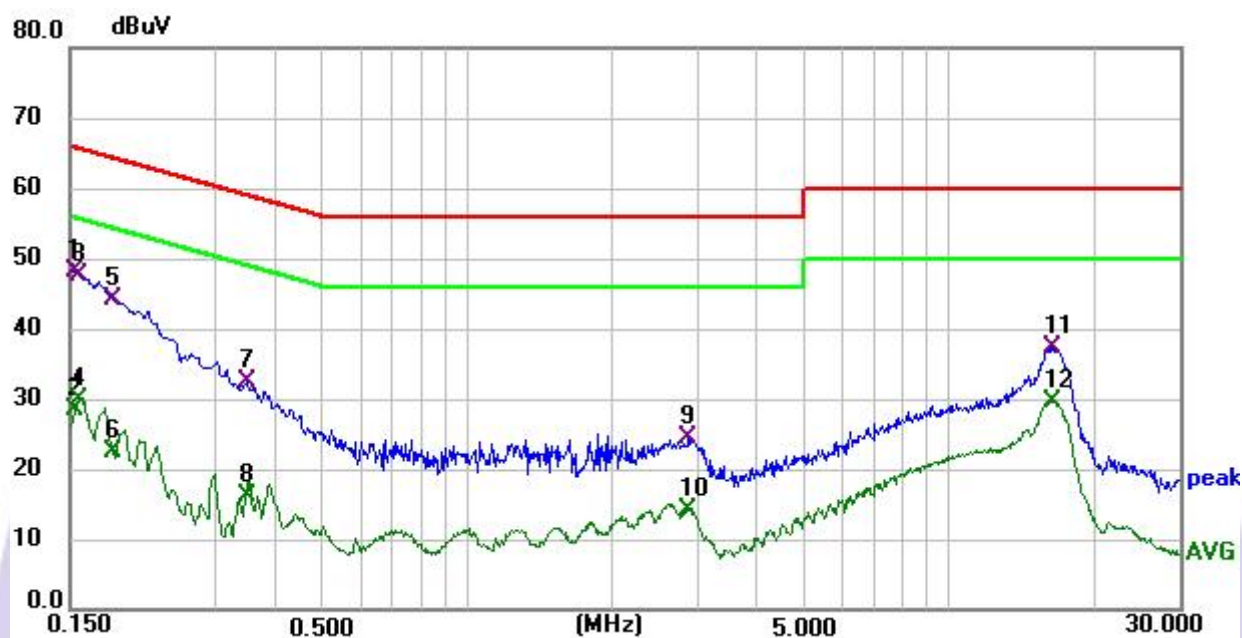

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.154	38.44	9.83	48.27	65.79	-17.52	QP	P	
2	0.154	18.69	9.83	28.52	55.79	-27.27	AVG	P	
3	0.157	37.73	9.85	47.58	65.62	-18.04	QP	P	
4	0.157	19.89	9.85	29.74	55.62	-25.88	AVG	P	
5	0.184	34.09	9.98	44.07	64.30	-20.23	QP	P	
6	0.184	12.52	9.98	22.50	54.30	-31.80	AVG	P	
7	0.348	22.82	9.62	32.44	59.01	-26.57	QP	P	
8	0.348	6.48	9.62	16.10	49.01	-32.91	AVG	P	
9	2.881	14.57	9.76	24.33	56.00	-31.67	QP	P	
10	2.881	4.34	9.76	14.10	46.00	-31.90	AVG	P	
11	16.375	27.05	10.33	37.38	60.00	-22.62	QP	P	
12	16.375	19.36	10.33	29.69	50.00	-20.31	AVG	P	

Channel:	Middle	Phase :	N
----------	--------	---------	---

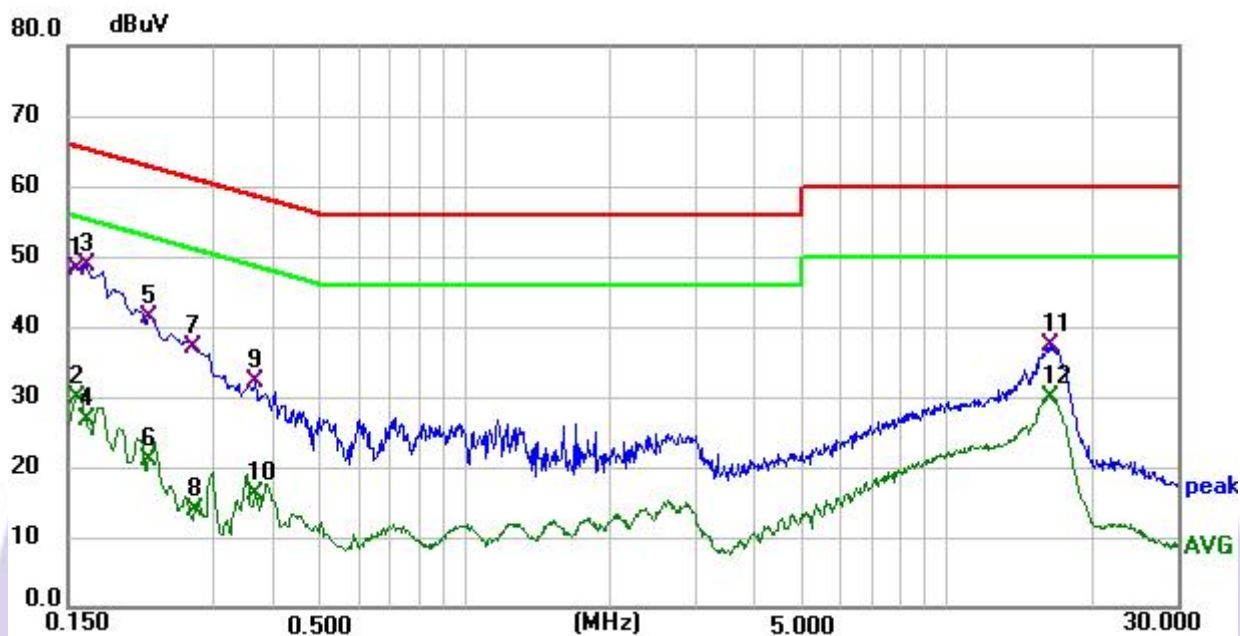

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.157	38.39	9.81	48.20	65.62	-17.42	QP	P	
2	0.157	20.16	9.81	29.97	55.62	-25.65	AVG	P	
3 *	0.164	38.90	9.80	48.70	65.26	-16.56	QP	P	
4	0.164	17.04	9.80	26.84	55.26	-28.42	AVG	P	
5	0.222	31.61	9.80	41.41	62.74	-21.33	QP	P	
6	0.222	11.25	9.80	21.05	52.74	-31.69	AVG	P	
7	0.273	27.29	9.80	37.09	61.03	-23.94	QP	P	
8	0.276	4.15	9.80	13.95	50.94	-36.99	AVG	P	
9	0.366	22.21	9.81	32.02	58.59	-26.57	QP	P	
10	0.366	6.22	9.81	16.03	48.59	-32.56	AVG	P	
11	16.350	27.29	9.97	37.26	60.00	-22.74	QP	P	
12	16.350	19.75	9.97	29.72	50.00	-20.28	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
Test Method : ANSI C63.10:2013
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
Humidity : 55.5% RH
Atmospheric Pressure : 101.3kPa
Test Voltage : AC 120V60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

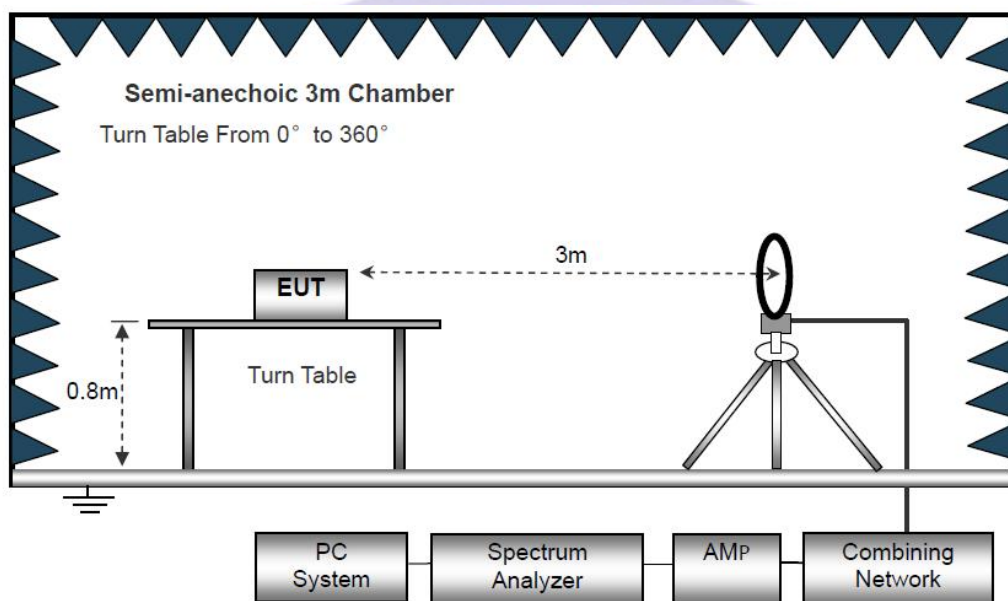

The test setup for emission measurement from 30 MHz to 1 GHz.

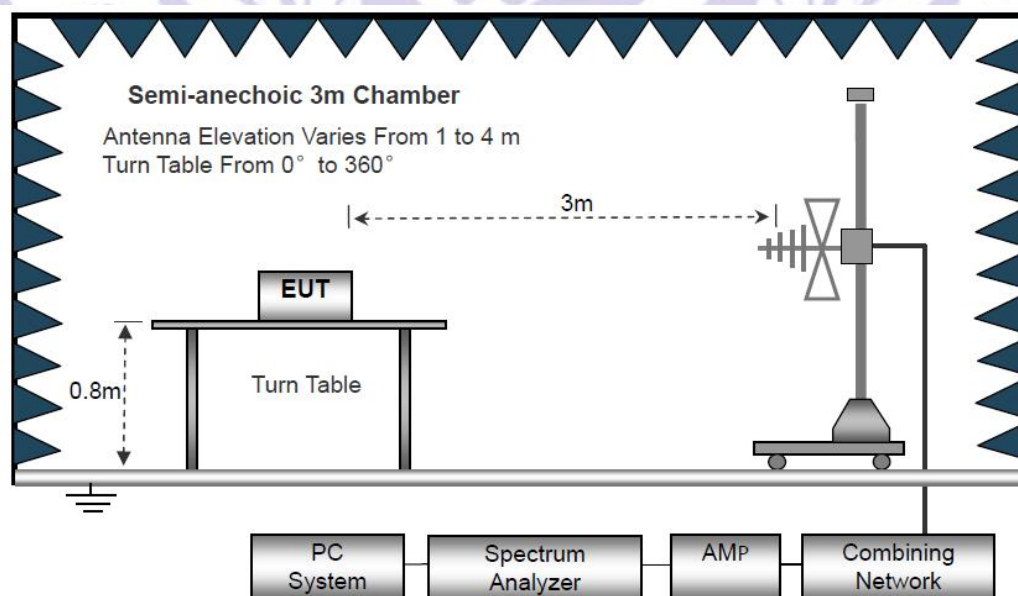

The test setup for emission measurement above 1 GHz

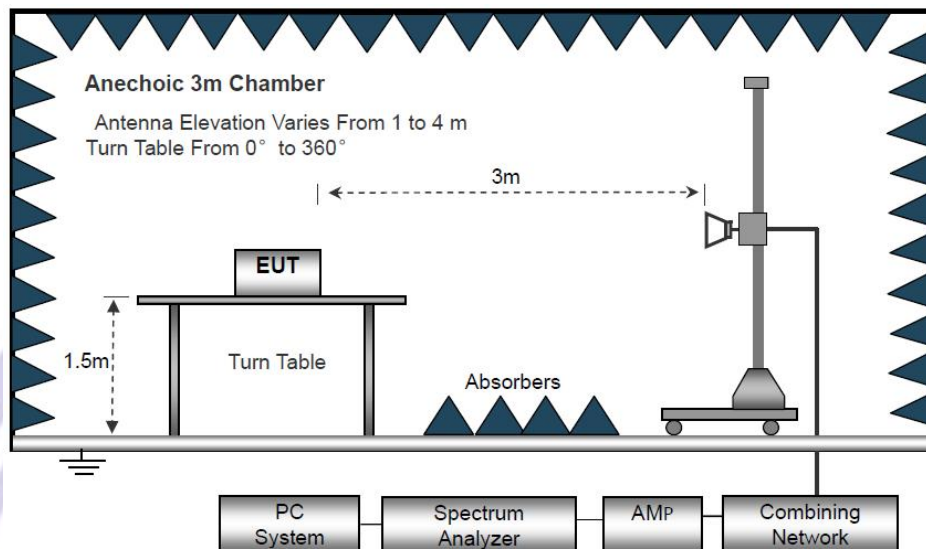

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value

6.4 Test Procedure


1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

For Average Measurement:

VBW=10Hz, when duty cycle is no less than 98 percent.

VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Mode	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
BLE 1M	0	0.394	0.625	63.07	0.6307	2.0018
	19	0.394	0.625	63.07	0.6307	2.0052
	39	0.394	0.625	63.04	0.6304	2.0018

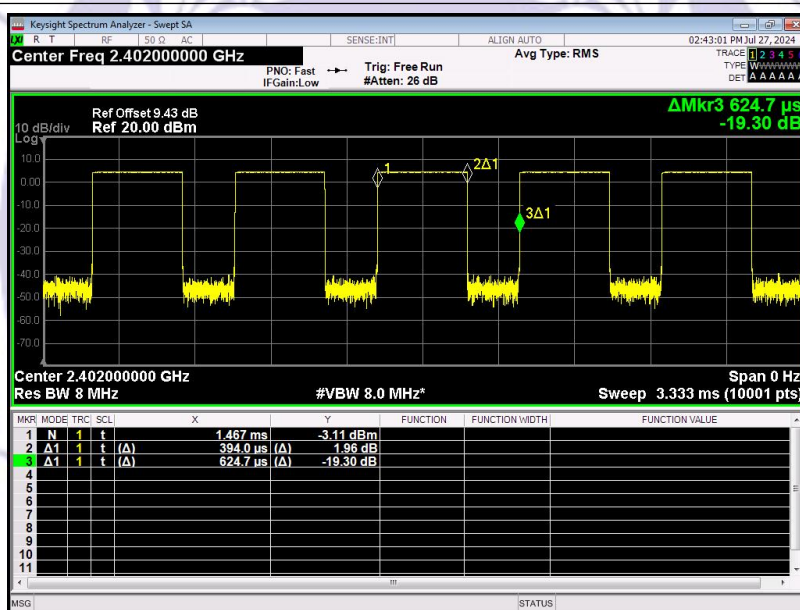

BLE 1M_Channel 0



BLE 1M_Channel 19

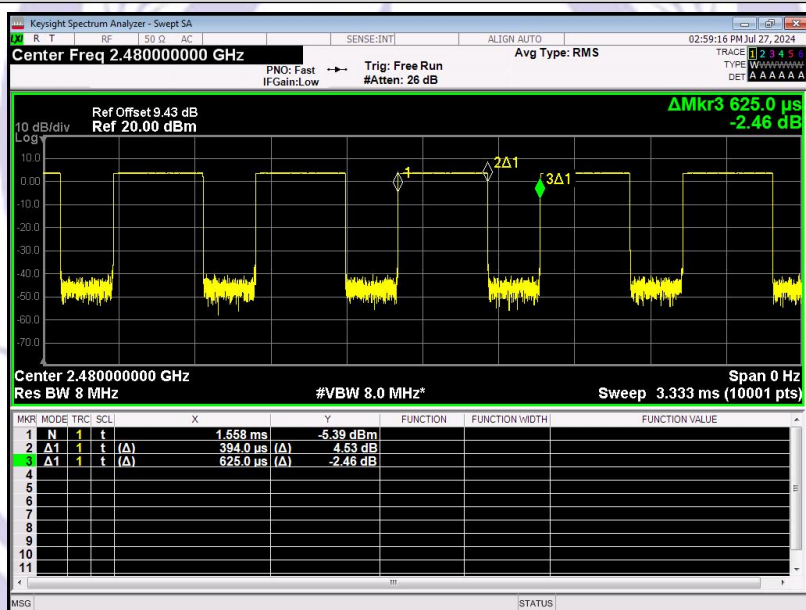

BLE 1M_Channel 39

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);


Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Pass.

Please refer to the following test plots for the worst test mode (GFSK (CH00: 2402MHz)).

Test plot for Horizontal

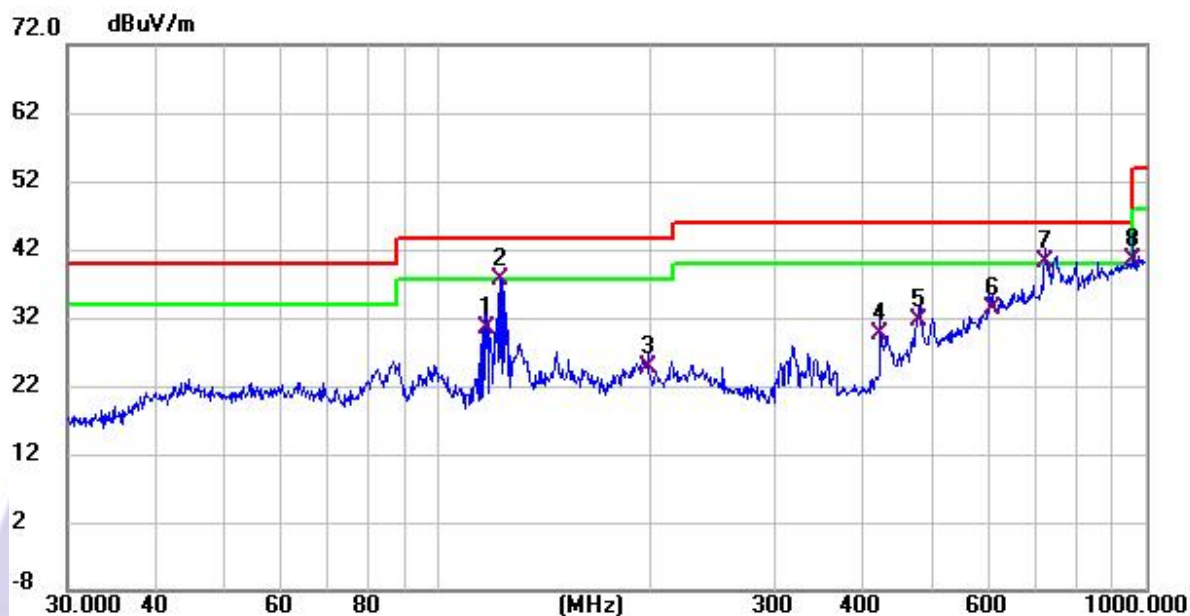


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	117.360	14.23	16.28	30.51	43.50	-12.99	QP			P	
2 !	122.574	20.81	16.85	37.66	43.50	-5.84	QP			P	
3	197.893	6.60	18.10	24.70	43.50	-18.80	QP			P	
4	422.058	11.10	18.49	29.59	46.00	-16.41	QP			P	
5	477.169	7.76	23.80	31.56	46.00	-14.44	QP			P	
6	607.787	4.87	28.47	33.34	46.00	-12.66	QP			P	
7 *	721.726	9.07	31.16	40.23	46.00	-5.77	QP			P	
8	962.162	5.56	34.85	40.41	53.90	-13.49	QP			P	

Remark:

Emission Level=Reading+Factor

Factor=Cable Loss+ANT Factor-Preamplifier Factor

Test plot for Vertical

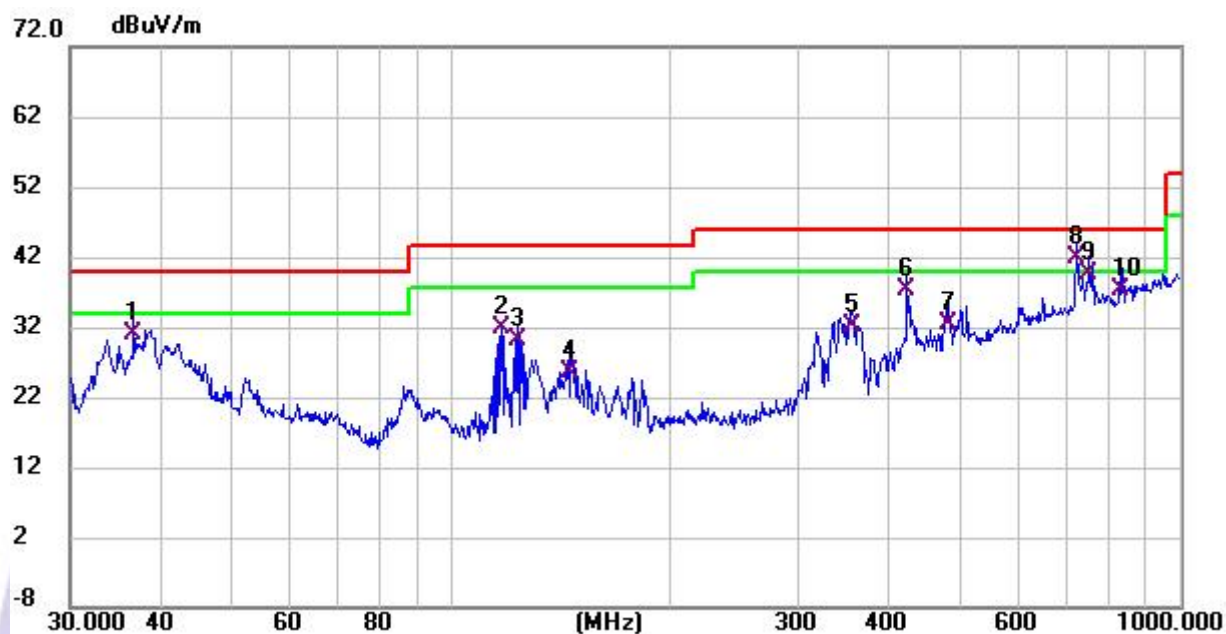

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	36.637	12.91	18.09	31.00	40.00	-9.00	QP			P	
2	117.360	18.41	13.50	31.91	43.50	-11.59	QP			P	
3	123.265	16.15	14.11	30.26	43.50	-13.24	QP			P	
4	145.861	9.08	16.58	25.66	43.50	-17.84	QP			P	
5	355.427	13.65	18.57	32.22	46.00	-13.78	QP			P	
6	422.058	14.83	22.49	37.32	46.00	-8.68	QP			P	
7	480.528	7.45	25.08	32.53	46.00	-13.47	QP			P	
8 *	721.726	11.69	30.16	41.85	46.00	-4.15	QP			P	
9	750.108	8.72	30.97	39.69	46.00	-6.31	QP			P	
10	827.493	5.56	31.71	37.27	46.00	-8.73	QP			P	

Remark:

Emission Level=Reading+Factor

Factor=Cable Loss+ANT Factor-Preamp Factor

Test Frequency 1GHz-25GHz:

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804	55.47	30.55	5.77	24.66	55.35	74	-18.65	Pk
V	4804	45.07	30.55	5.77	24.66	44.95	54	-9.05	AV
V	7206	53.80	30.33	6.32	24.55	54.34	74	-19.66	Pk
V	7206	44.43	30.33	6.32	24.55	44.97	54	-9.03	AV
V	9608	51.38	30.85	7.45	24.69	52.67	74	-21.33	Pk
V	9608	40.77	30.85	7.45	24.69	42.06	54	-11.94	AV
V	12010	50.68	31.02	8.99	25.57	54.22	74	-19.78	Pk
V	12010	40.76	31.02	8.99	25.57	44.30	54	-9.70	AV
H	4804	54.93	30.55	5.77	24.66	54.81	74	-19.19	Pk
H	4804	45.98	30.55	5.77	24.66	45.86	54	-8.14	AV
H	7206	53.58	30.33	6.32	24.55	54.12	74	-19.88	Pk
H	7206	42.64	30.33	6.32	24.55	43.18	54	-10.82	AV
H	9608	51.20	30.85	7.45	24.69	52.49	74	-21.51	Pk
H	9608	41.21	30.85	7.45	24.69	42.50	54	-11.50	AV
H	12010	49.79	31.02	8.99	25.57	53.33	74	-20.67	Pk
H	12010	41.53	31.02	8.99	25.57	45.07	54	-8.93	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2440MHz									
V	4880	54.93	30.55	5.77	24.66	54.81	74	-19.19	Pk
V	4880	46.87	30.55	5.77	24.66	46.75	54	-7.25	AV
V	7320	51.99	30.33	6.32	24.55	52.53	74	-21.47	Pk
V	7320	44.49	30.33	6.32	24.55	45.03	54	-8.97	AV
V	9760	50.03	30.85	7.45	24.69	51.32	74	-22.68	Pk
V	9760	43.89	30.85	7.45	24.69	45.18	54	-8.82	AV
V	12200	48.87	31.02	8.99	25.57	52.41	74	-21.59	Pk
V	12200	39.51	31.02	8.99	25.57	43.05	54	-10.95	AV
H	4880	54.93	30.55	5.77	24.66	54.81	74	-19.19	Pk
H	4880	44.21	30.55	5.77	24.66	44.09	54	-9.91	AV
H	7320	53.35	30.33	6.32	24.55	53.89	74	-20.11	Pk
H	7320	44.64	30.33	6.32	24.55	45.18	54	-8.82	AV
H	9760	52.50	30.85	7.45	24.69	53.79	74	-20.21	Pk
H	9760	44.19	30.85	7.45	24.69	45.48	54	-8.52	AV
H	12200	49.89	31.02	8.99	25.57	53.43	74	-20.57	Pk
H	12200	40.75	31.02	8.99	25.57	44.29	54	-9.71	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960	54.88	30.55	5.77	24.66	54.76	74	-19.24	Pk
V	4960	44.43	30.55	5.77	24.66	44.31	54	-9.69	AV
V	7440	53.09	30.33	6.32	24.55	53.63	74	-20.37	Pk
V	7440	45.03	30.33	6.32	24.55	45.57	54	-8.43	AV
V	9920	50.72	30.85	7.45	24.69	52.01	74	-21.99	Pk
V	9920	39.34	30.85	7.45	24.69	40.63	54	-13.37	AV
V	12400	48.97	31.02	8.99	25.57	52.51	74	-21.49	Pk
V	12400	40.25	31.02	8.99	25.57	43.79	54	-10.21	AV
H	4960	53.66	30.55	5.77	24.66	53.54	74	-20.46	Pk
H	4960	45.94	30.55	5.77	24.66	45.82	54	-8.18	AV
H	7440	51.90	30.33	6.32	24.55	52.44	74	-21.56	Pk
H	7440	42.90	30.33	6.32	24.55	43.44	54	-10.56	AV
H	9920	52.37	30.85	7.45	24.69	53.66	74	-20.34	Pk
H	9920	41.70	30.85	7.45	24.69	42.99	54	-11.01	AV
H	12400	48.50	31.02	8.99	25.57	52.04	74	-21.96	Pk
H	12400	39.24	31.02	8.99	25.57	42.78	54	-11.22	AV

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390	56.99	30.22	4.85	23.98	55.60	74	PK	PASS
	H	2390	45.94	30.22	4.85	23.98	44.55	54	AV	PASS
	H	2400	56.14	30.22	4.85	23.98	54.75	74	PK	PASS
	H	2400	46.28	30.22	4.85	23.98	44.89	54	AV	PASS
	V	2390	56.42	30.22	4.85	23.98	55.03	74	PK	PASS
	V	2390	45.50	30.22	4.85	23.98	44.11	54	AV	PASS
	V	2400	55.81	30.22	4.85	23.98	54.42	74	PK	PASS
	V	2400	46.85	30.22	4.85	23.98	45.46	54	AV	PASS
	High Channel: 2480MHz									
	H	2483.5	56.66	35.11	3.56	27.75	52.86	74	PK	PASS
	H	2483.5	45.81	35.11	3.56	27.75	42.01	54	AV	PASS
	H	2500	55.28	35.1	3.57	27.8	51.55	74	PK	PASS
	H	2500	47.61	35.1	3.57	27.8	43.88	54	AV	PASS
	V	2483.5	57.92	35.11	3.56	27.75	54.12	74	PK	PASS
	V	2483.5	56.96	35.11	3.56	27.75	53.16	54	AV	PASS
	V	2500	58.44	35.1	3.57	27.8	54.71	74	PK	PASS
	V	2500	47.30	35.1	3.57	27.8	43.57	54	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

7 Conduct Band Edge And Spurious Emissions Measurement


Test Requirement	: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). RSS-247 5.5
Test Method	: ANSI C63.10:2013 and RSS-Gen
Test Limit	: Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Result


Mode	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
BLE 1M	0	2400.00	-52.476	-15.86	-36.616	PASS
		21208.8	-53.127	-15.86	-37.267	PASS
	19	21177.0	-53.518	-16.38	-37.138	PASS
	39	2483.50	-55.185	-16.59	-38.595	PASS
		21587.8	-52.517	-16.59	-35.927	PASS
BLE 2M	0	2400.00	-52.570	-15.88	-36.690	PASS
		21596.5	-52.590	-15.88	-36.710	PASS
		21591.5	-53.699	-16.29	-37.409	PASS
	19	2483.50	-53.642	-16.59	-37.052	PASS
	39	21136.4	-52.792	-16.59	-36.202	PASS
		2400.00	-52.476	-15.86	-36.616	PASS

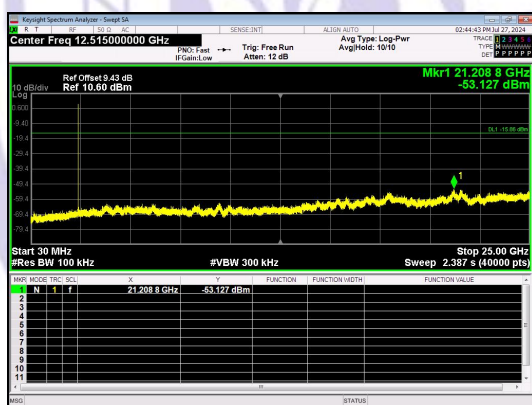


30.0 MHz - 25000.0 MHz
BLE 1M_Channel 0




In-Band Reference Level
BLE 1M_Channel 0

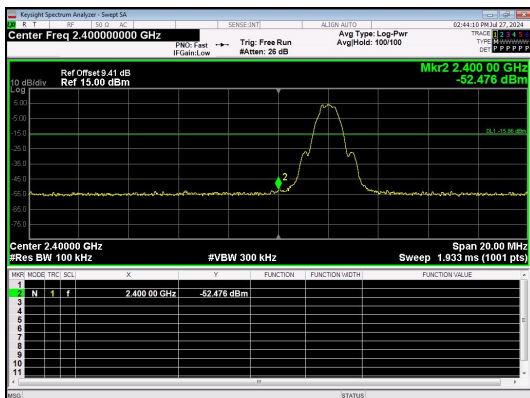


Out Of Band Emission
BLE 1M_Channel 0

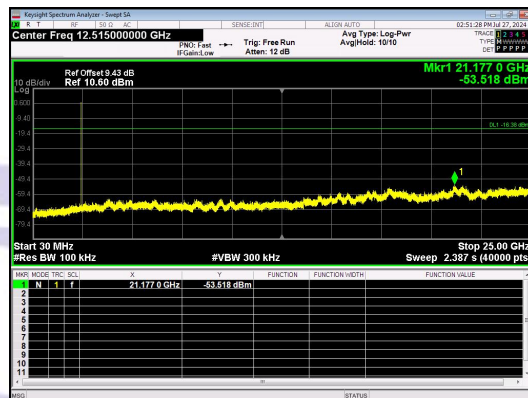


30.0 MHz - 25000.0 MHz
BLE 1M_Channel 19

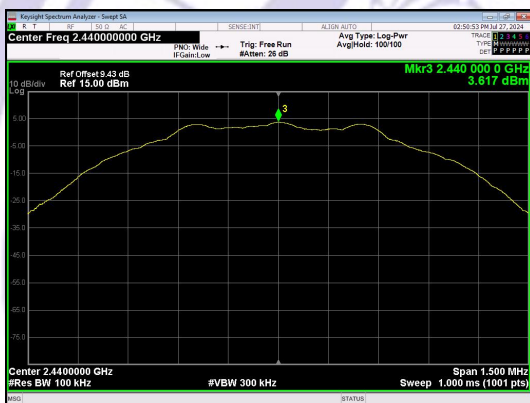


In-Band Reference Level
BLE 1M_Channel 19

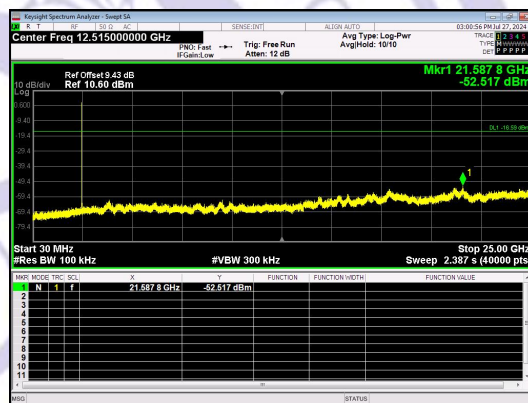

30.0 MHz - 25000.0 MHz
BLE 1M_Channel 39

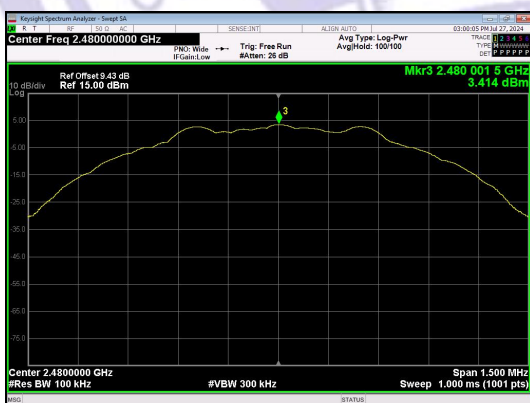

In-Band Reference Level
BLE 1M_Channel 39

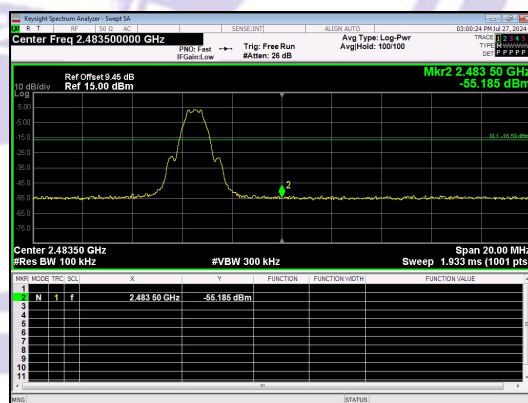

Out Of Band Emission
BLE 1M_Channel 39

8 6dB Bandwidth Measurement & 99% OCB Test

Test Requirement : FCC CFR47 Part 15 Section 15.247 (a)(2)

Test Method : ANSI C63.10:2013


Test Limit
Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz(For 6dB bandwidth)
3. Set the spectrum analyzer: RBW = 20kHz, VBW = 62kHz(For LE 99% bandwidth)

8.2 Test Result


Mode	Channel number	Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB BW Required Limit (KHz)	Result
BLE 1M	00	2402	0.6570	1.0398	>500	Pass
	19	2440	0.6600	1.0275	>500	
	39	2480	0.6573	1.0359	>500	

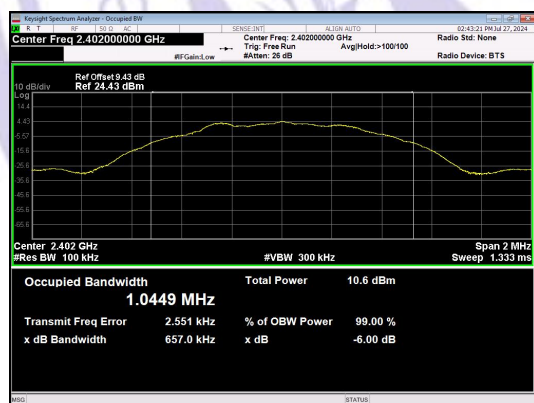


BLE 1M_Channel 0

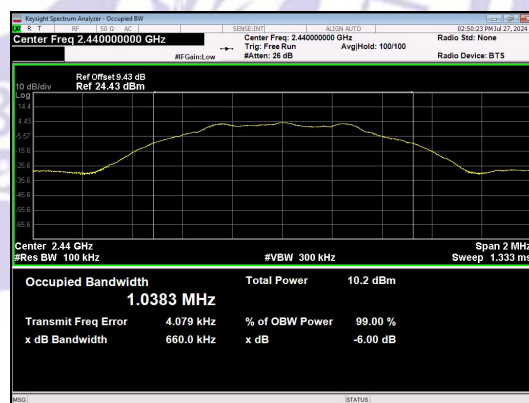


BLE 1M_Channel 19

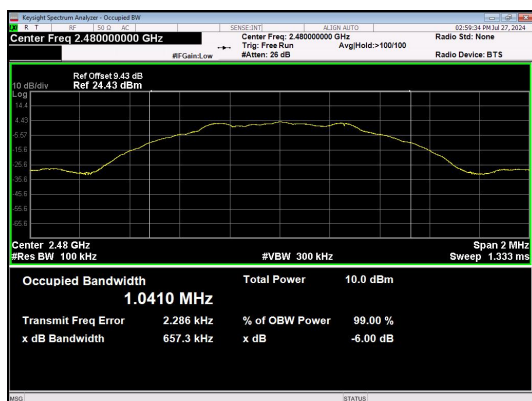


BLE 1M_Channel 39

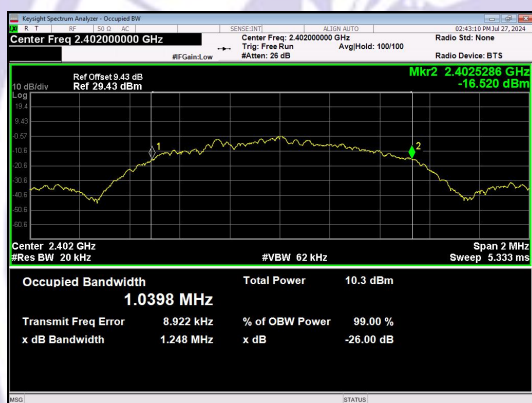

BLE 1M_Channel 0

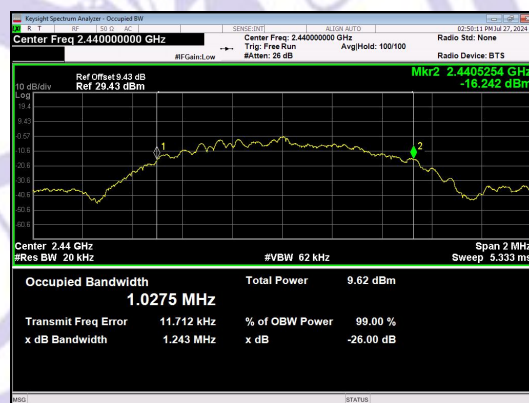

BLE 1M_Channel 19

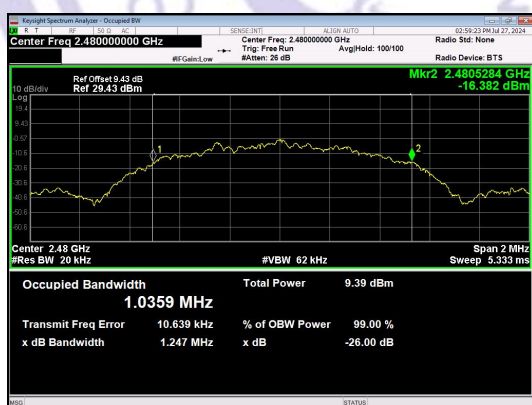

BLE 1M_Channel 39

9 Maximum Peak Output Power


Test Requirement	:	FCC CFR47 Part 15 Section 15.247 (b)(3)
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

9.1 Test Procedure


1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.
4. This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.
 - a) Set the RBW $\geq$ DTS bandwidth.
 - b) Set VBW $\geq 3 \times$ RBW.
 - c) Set span $\geq 3 \times$ RBW
 - d) Sweep time = auto couple.
 - e) Detector = peak.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use peak marker function to determine the peak amplitude level.

9.2 Test Result


Mode	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
BLE 1M	0	4.400	2.75	None	30	PASS
	19	3.878	2.44	None	30	PASS
	39	3.638	2.31	None	30	PASS

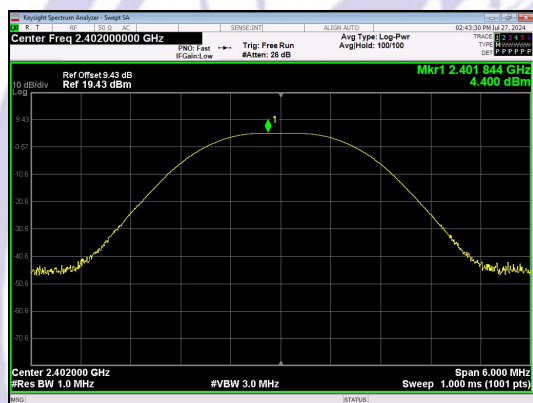

Peak Output Power
BLE 1M_Channel 0

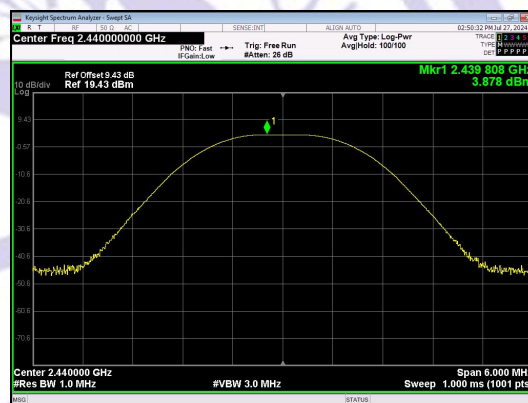

Peak Output Power
BLE 1M_Channel 19

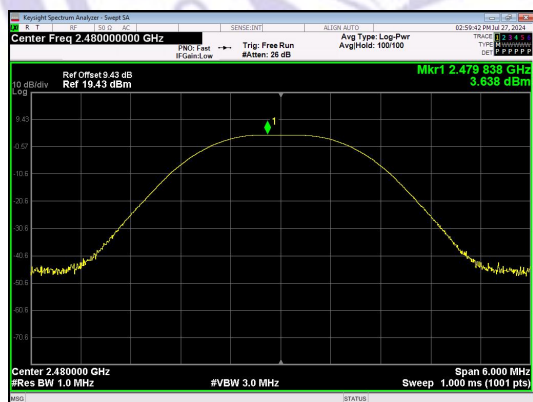

Peak Output Power
BLE 1M_Channel 39

10 Power Spectral density

Test Requirement : FCC CFR47 Part 15 Section 15.247 (e)

Test Method : ANSI C63.10:2013


Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 9.1kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

10.2 Test Result


Mode	Channel	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
BLE 1M	0	-10.604	≤8	PASS
BLE 1M	19	-11.627	≤8	PASS
BLE 1M	39	-11.301	≤8	PASS

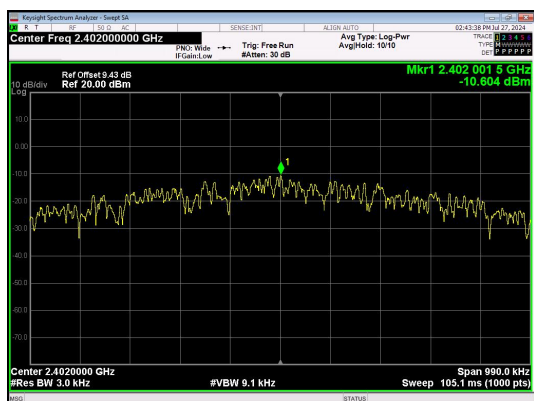

BLE 1M_Channel 0

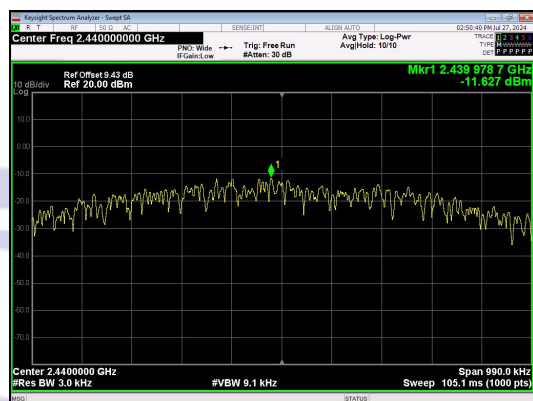

BLE 1M_Channel 19

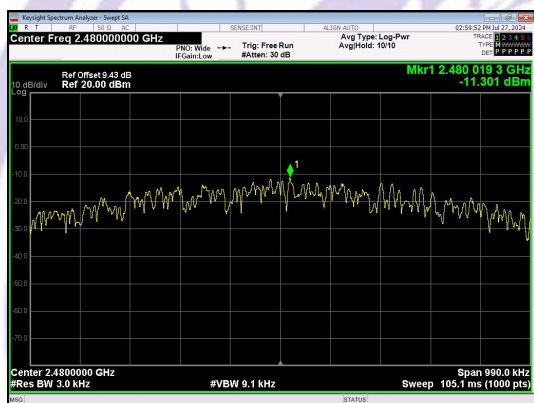

BLE 1M_Channel 39

11 Antenna Application

11.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2 Result

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is -2.23dBi. It complies with the standard requirement.

12 Test Setup

Please see the attachment for details.



13 EUT Photos

Please see the attachment for details.

*****THE END REPORT*****

