


8 Maximum Peak Output Power Test

8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	125mW

8.2 Test Setup



8.3 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.1.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.



8.4 Test Data

Test Item : Max. peak output power
Test Voltage : 3.7V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24.5°C
Humidity : 55%RH

L:

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	5.28	≤20.97	PASS
DH5	Ant1	2441	5.04	≤20.97	PASS
DH5	Ant1	2480	5.45	≤20.97	PASS
2DH5	Ant1	2402	3.28	≤20.97	PASS
2DH5	Ant1	2441	3.41	≤20.97	PASS
2DH5	Ant1	2480	4.00	≤20.97	PASS
3DH5	Ant1	2402	3.76	≤20.97	PASS
3DH5	Ant1	2441	3.91	≤20.97	PASS
3DH5	Ant1	2480	3.96	≤20.97	PASS

R:

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	4.83	≤20.97	PASS
DH5	Ant1	2441	5.65	≤20.97	PASS
DH5	Ant1	2480	5.99	≤20.97	PASS
2DH5	Ant1	2402	3.12	≤20.97	PASS
2DH5	Ant1	2441	3.89	≤20.97	PASS
2DH5	Ant1	2480	4.58	≤20.97	PASS
3DH5	Ant1	2402	4.14	≤20.97	PASS
3DH5	Ant1	2441	4.56	≤20.97	PASS
3DH5	Ant1	2480	5.18	≤20.97	PASS




Test Graphs:

L:

DH5-Ant1-2402-PASS



DH5-Ant1-2441-PASS

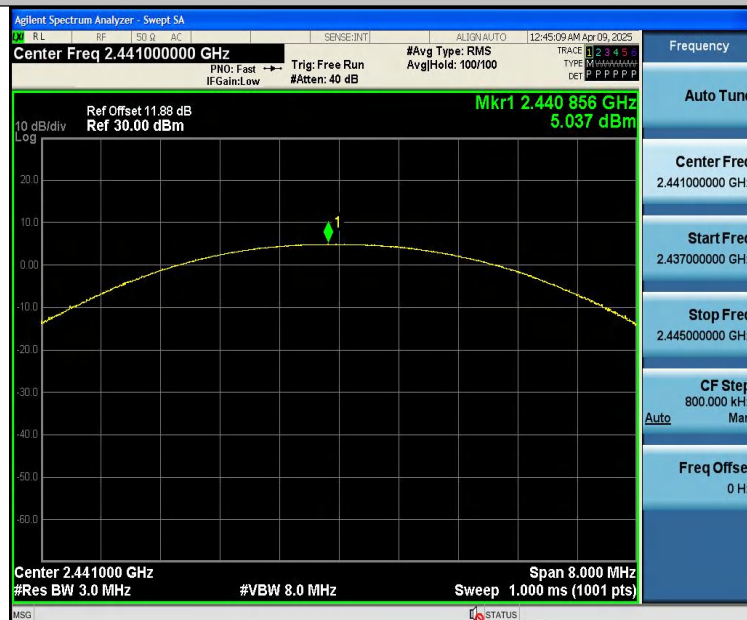



DH5-Ant1-2480-PASS



2DH5-Ant1-2402-PASS



2DH5-Ant1-2441-PASS



2DH5-Ant1-2480-PASS



3DH5-Ant1-2402-PASS



3DH5-Ant1-2441-PASS



3DH5-Ant1-2480-PASS



Report No.: PTC25033115801E-FC01



R:

DH5-Ant1-2402-PASS



DH5-Ant1-2441-PASS



DH5-Ant1-2480-PASS



2DH5-Ant1-2402-PASS



2DH5-Ant1-2441-PASS



2DH5-Ant1-2480-PASS



3DH5-Ant1-2402-PASS



3DH5-Ant1-2441-PASS



3DH5-Ant1-2480-PASS






9 20DB Occupy Bandwidth Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

9.2 Test Setup



9.3 Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4 Test Data

Test Item	:	20dB BW	Test Mode	:	CH Low ~ CH High
Test Voltage	:	3.7V	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH



L:

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.963	2401.541	2402.504	---	---
DH5	Ant1	2441	0.963	2440.538	2441.501	---	---
DH5	Ant1	2480	0.960	2479.541	2480.501	---	---
2DH5	Ant1	2402	1.323	2401.343	2402.666	---	---
2DH5	Ant1	2441	1.278	2440.376	2441.654	---	---
2DH5	Ant1	2480	1.287	2479.373	2480.660	---	---
3DH5	Ant1	2402	1.299	2401.358	2402.657	---	---
3DH5	Ant1	2441	1.290	2440.358	2441.648	---	---
3DH5	Ant1	2480	1.287	2479.358	2480.645	---	---

R:

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.960	2401.538	2402.498	---	---
DH5	Ant1	2441	0.960	2440.541	2441.501	---	---
DH5	Ant1	2480	0.957	2479.538	2480.495	---	---
2DH5	Ant1	2402	1.284	2401.373	2402.657	---	---
2DH5	Ant1	2441	1.287	2440.373	2441.660	---	---
2DH5	Ant1	2480	1.272	2479.376	2480.648	---	---
3DH5	Ant1	2402	1.284	2401.361	2402.645	---	---
3DH5	Ant1	2441	1.296	2440.358	2441.654	---	---
3DH5	Ant1	2480	1.290	2479.361	2480.651	---	---



Test Graphs:

L:

DH5-Ant1-2402



DH5-Ant1-2441



DH5-Ant1-2480



2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480



R:

DH5-Ant1-2402





DH5-Ant1-2441



DH5-Ant1-2480



2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480






10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup



10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 300 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data

Test Item	:	Frequency Separation	Test Mode	:	CH Low ~ CH High
Test Voltage	:	3.7V	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH



L:

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.004	≥ 0.642	PASS
2DH5	Ant1	Hop	1.004	≥ 0.882	PASS
3DH5	Ant1	Hop	0.994	≥ 0.866	PASS

R:

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.85	≥ 0.640	PASS
2DH5	Ant1	Hop	1.316	≥ 0.858	PASS
3DH5	Ant1	Hop	0.974	≥ 0.864	PASS

Test Graphs:

L:





3DH5-Ant1-Hop-PASS



R:

DH5-Ant1-Hop-PASS



2DH5-Ant1-Hop-PASS



3DH5-Ant1-Hop-PASS



Report No.: PTC25033115801E-FC01






11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup



11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 300kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



11.4 Test Data

Test Item	: Number of Hopping Frequency	Test Mode	: CH Low ~ CH High
Test Voltage	: 3.7V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

L:


TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

R:

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS


Test Graphs:

L:

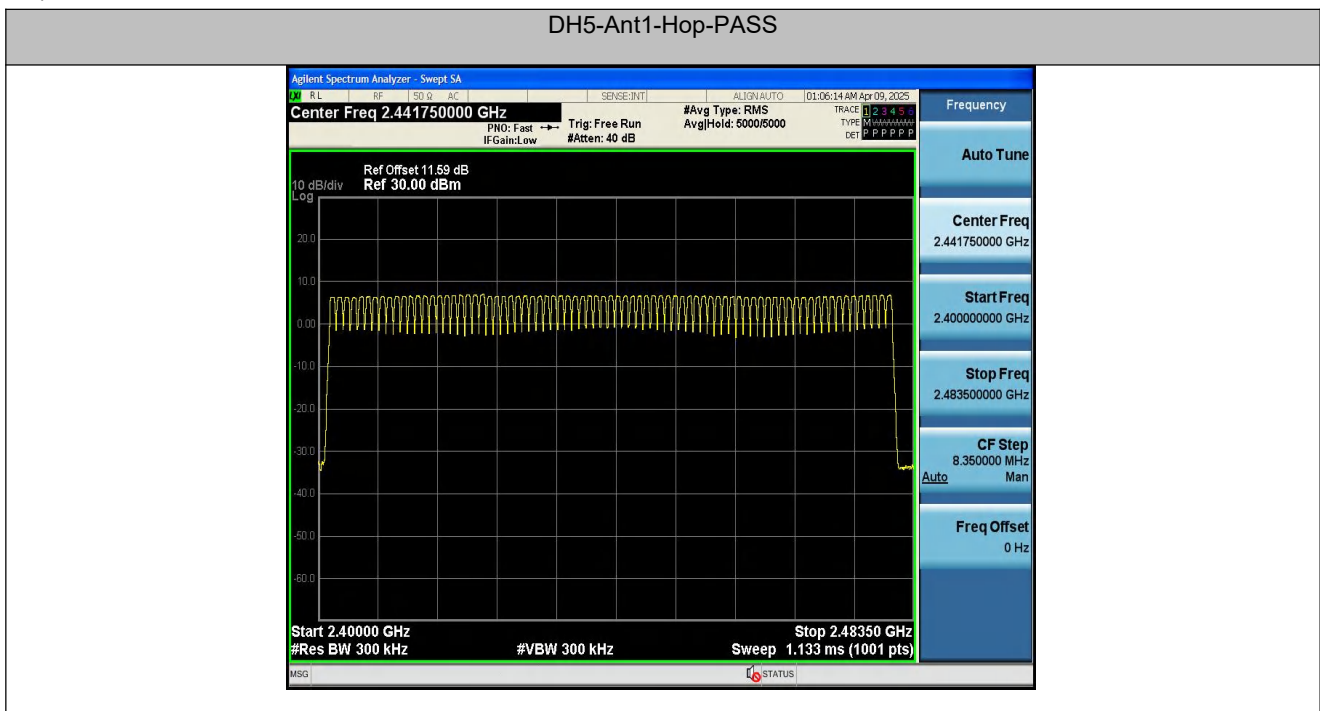




2DH5-Ant1-Hop-PASS

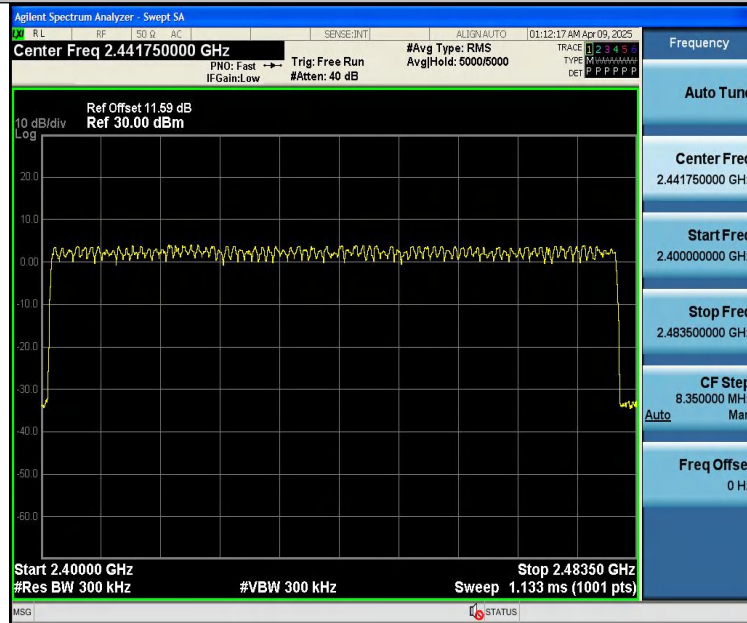

3DH5-Ant1-Hop-PASS

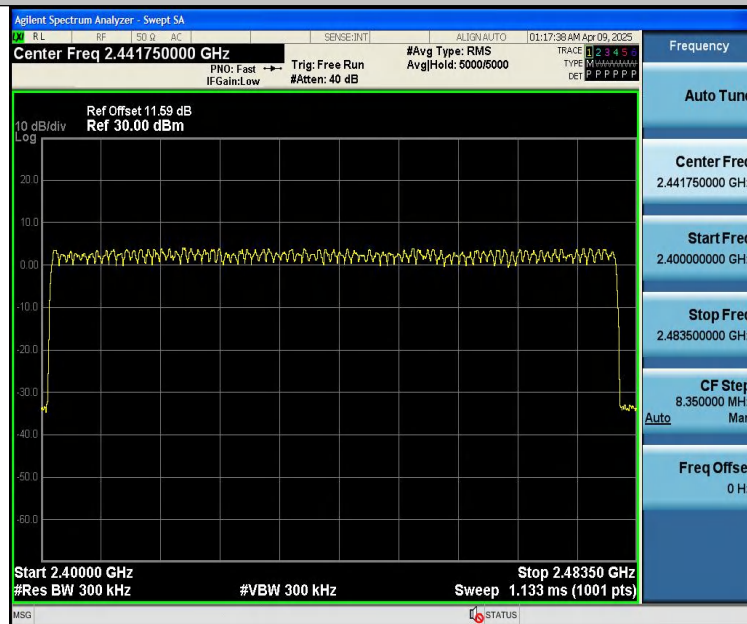




R:


DH5-Ant1-Hop-PASS



2DH5-Ant1-Hop-PASS

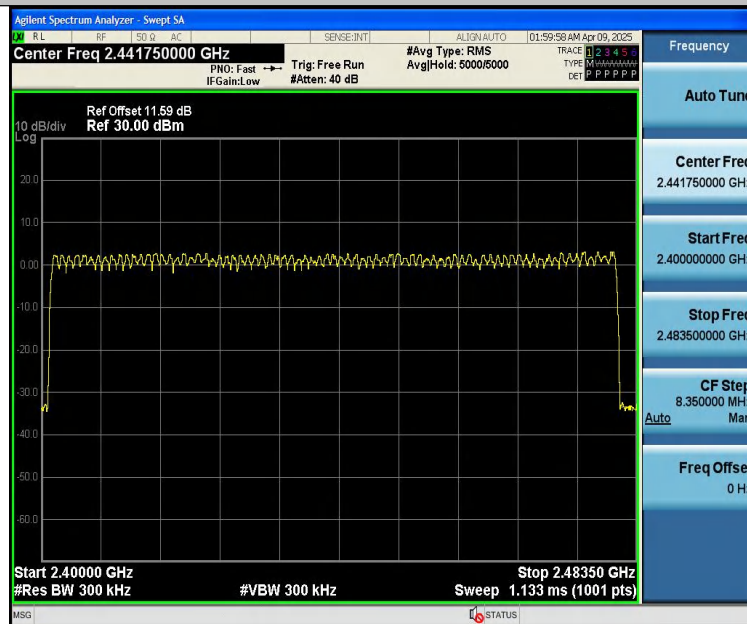

3DH5-Ant1-Hop-PASS

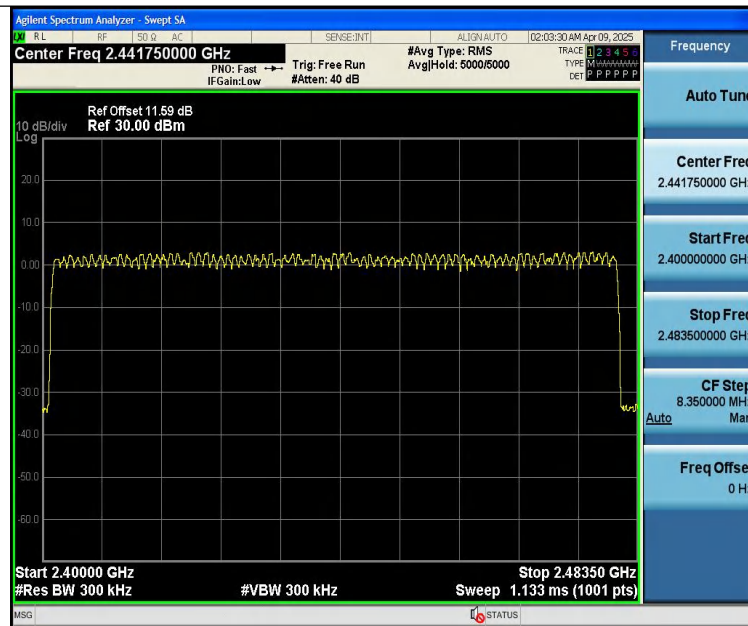




12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = clear write.
7. Allow trace to fully stabilize.



12.4 Test Data

Test Item : Time of Occupancy
Test Voltage : 3.7V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24.5°C
Humidity : 55%RH

L:

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.884	106.67	0.308	≤0.4	PASS
2DH5	Ant1	Hop	2.889	106.67	0.308	≤0.4	PASS
3DH5	Ant1	Hop	2.892	106.67	0.308	≤0.4	PASS
DH1	Ant1	Hop	0.381	320	0.122	≤0.4	PASS
2DH1	Ant1	Hop	0.390	320	0.125	≤0.4	PASS
3DH1	Ant1	Hop	0.390	320	0.125	≤0.4	PASS
DH3	Ant1	Hop	1.638	160	0.262	≤0.4	PASS
2DH3	Ant1	Hop	1.643	160	0.263	≤0.4	PASS
3DH3	Ant1	Hop	1.640	160	0.262	≤0.4	PASS

R:

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.885	106.67	0.308	≤0.4	PASS
2DH5	Ant1	Hop	2.891	106.67	0.308	≤0.4	PASS
3DH5	Ant1	Hop	2.890	106.67	0.308	≤0.4	PASS
DH1	Ant1	Hop	0.381	320	0.122	≤0.4	PASS
2DH1	Ant1	Hop	0.390	320	0.125	≤0.4	PASS
3DH1	Ant1	Hop	0.389	320	0.124	≤0.4	PASS
DH3	Ant1	Hop	1.638	160	0.262	≤0.4	PASS
2DH3	Ant1	Hop	1.643	160	0.263	≤0.4	PASS
3DH3	Ant1	Hop	1.640	160	0.262	≤0.4	PASS

Note:


- 1.DH1/2DH1/3DH1 Dwell Time: Reading * (1600/2)*31.6/(channel number).
- 2.DH3/2DH3/3DH3 Dwell Time: Reading * (1600/4)*31.6/(channel number).
- 3.DH5/2DH5/3DH5 Dwell Time: Reading * (1600/6)*31.6/(channel number).




Test Graphs:

L:


DH5-Ant1-Hop-PASS

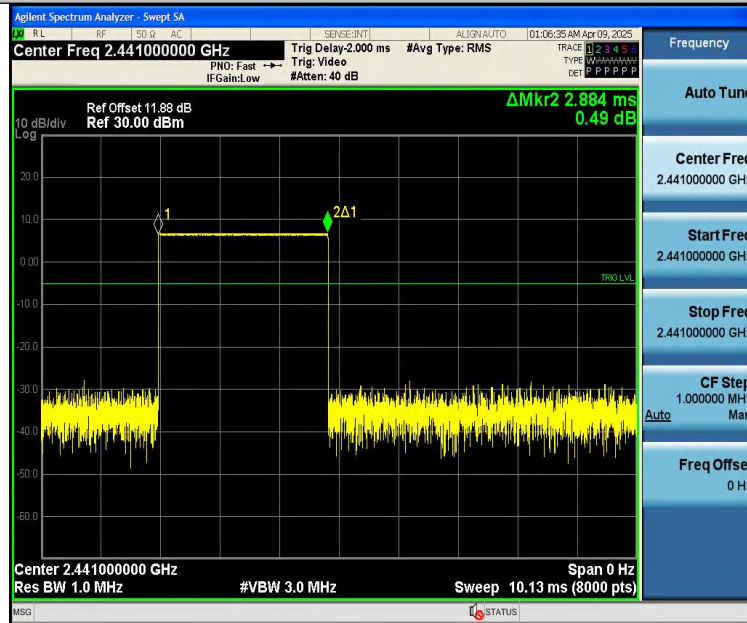


2DH5-Ant1-Hop-PASS

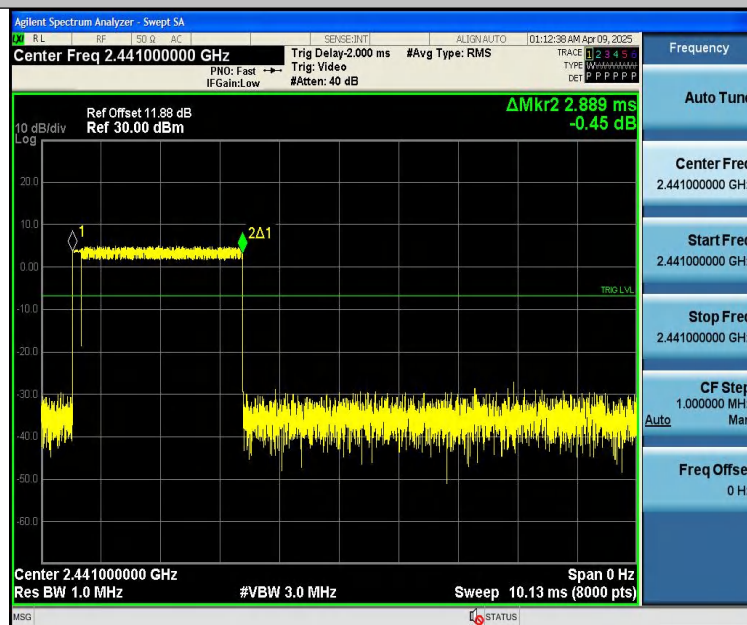

3DH5-Ant1-Hop-PASS

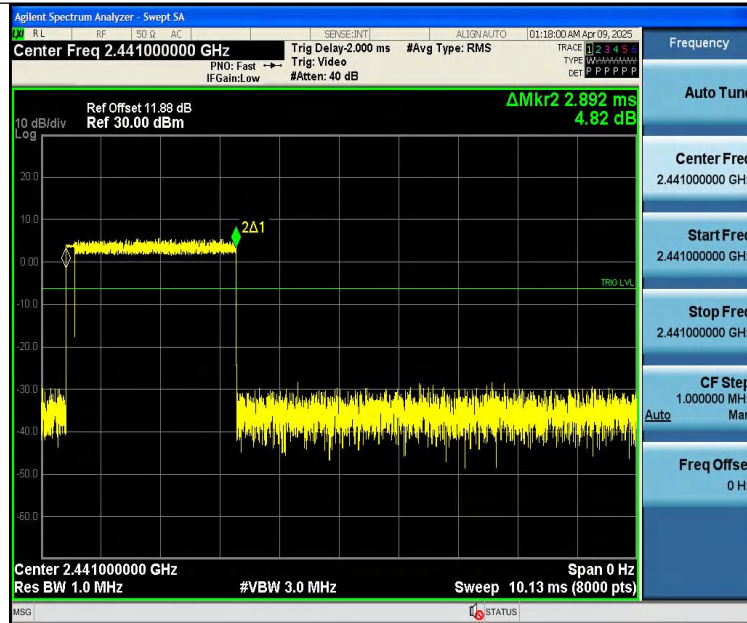

DH1-Ant1-Hop-PASS

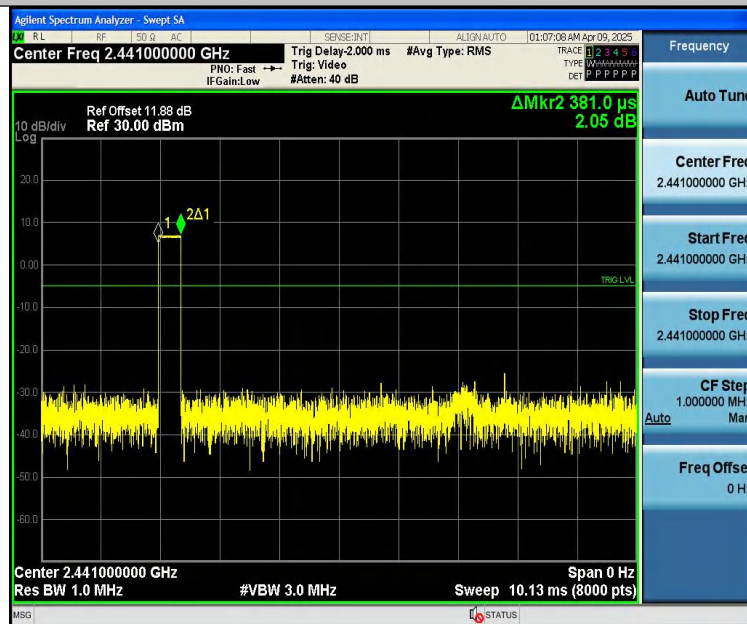

2DH1-Ant1-Hop-PASS