



L:

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.936	2401.529	2402.465	---	---
DH5	Ant1	2441	0.951	2440.532	2441.483	---	---
DH5	Ant1	2480	0.960	2479.529	2480.489	---	---
2DH5	Ant1	2402	1.281	2401.364	2402.645	---	---
2DH5	Ant1	2441	1.344	2440.322	2441.666	---	---
2DH5	Ant1	2480	1.332	2479.325	2480.657	---	---
3DH5	Ant1	2402	1.290	2401.343	2402.633	---	---
3DH5	Ant1	2441	1.254	2440.373	2441.627	---	---
3DH5	Ant1	2480	1.350	2479.322	2480.672	---	---

R:

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.960	2401.529	2402.489	---	---
DH5	Ant1	2441	0.954	2440.526	2441.480	---	---
DH5	Ant1	2480	0.960	2479.529	2480.489	---	---
2DH5	Ant1	2402	1.284	2401.364	2402.648	---	---
2DH5	Ant1	2441	1.323	2440.331	2441.654	---	---
2DH5	Ant1	2480	1.284	2479.364	2480.648	---	---
3DH5	Ant1	2402	1.245	2401.379	2402.624	---	---
3DH5	Ant1	2441	1.293	2440.349	2441.642	---	---
3DH5	Ant1	2480	1.329	2479.328	2480.657	---	---



Test Graphs:

L:

DH5-Ant1-2402



DH5-Ant1-2441



DH5-Ant1-2480



2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480



R:

DH5-Ant1-2402





DH5-Ant1-2441



DH5-Ant1-2480



2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480






10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup



10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 300 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data

Test Item	:	Frequency Separation	Test Mode	:	CH Low ~ CH High
Test Voltage	:	3.7V	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH



L:


TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.010	≥ 0.640	PASS
2DH5	Ant1	Hop	1.142	≥ 0.896	PASS
3DH5	Ant1	Hop	1.352	≥ 0.900	PASS

R:

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.016	≥ 0.640	PASS
2DH5	Ant1	Hop	1.008	≥ 0.882	PASS
3DH5	Ant1	Hop	1.020	≥ 0.886	PASS

Test Graphs:

L:

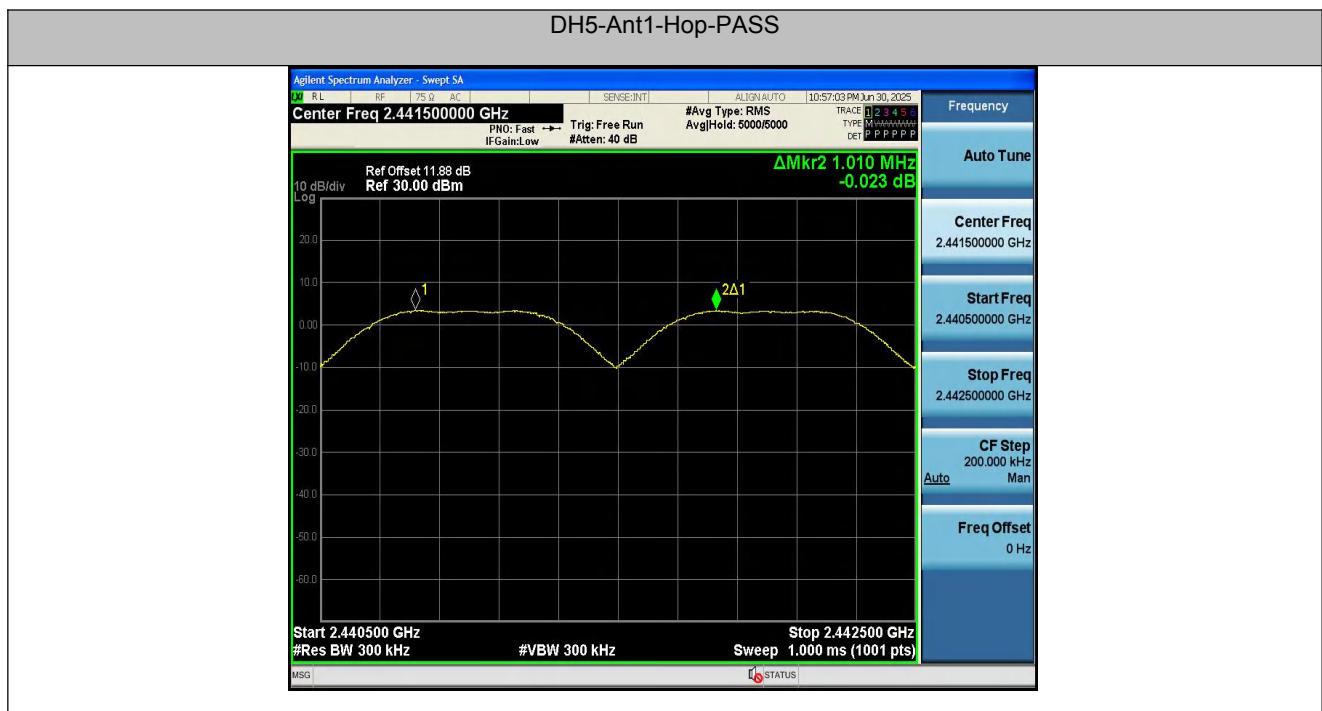



2DH5-Ant1-Hop-PASS



3DH5-Ant1-Hop-PASS





R:

DH5-Ant1-Hop-PASS



2DH5-Ant1-Hop-PASS



3DH5-Ant1-Hop-PASS



Report No.: PTC25062510801E-FC01




11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup



11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 300kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



11.4 Test Data

Test Item	: Number of Hopping Frequency	Test Mode	: CH Low ~ CH High
Test Voltage	: 3.7V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

L:


TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

R:

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS


Test Graphs:

L:

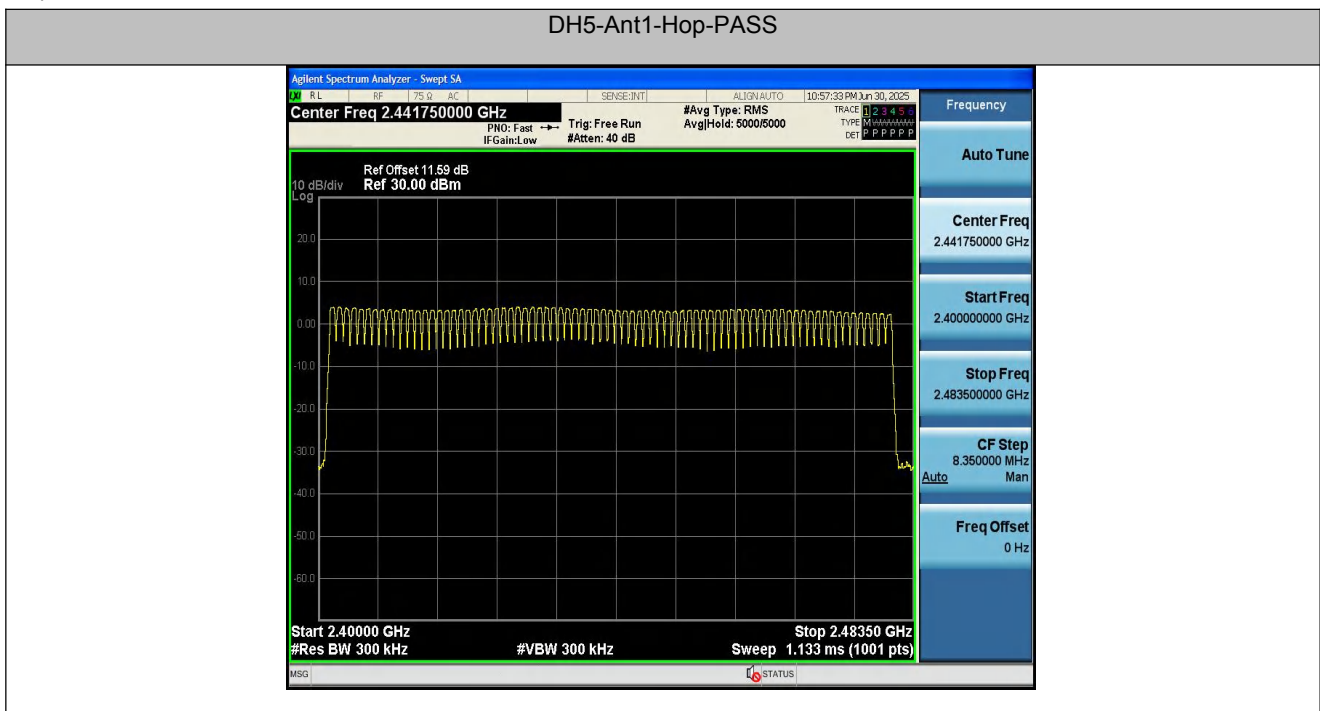




2DH5-Ant1-Hop-PASS

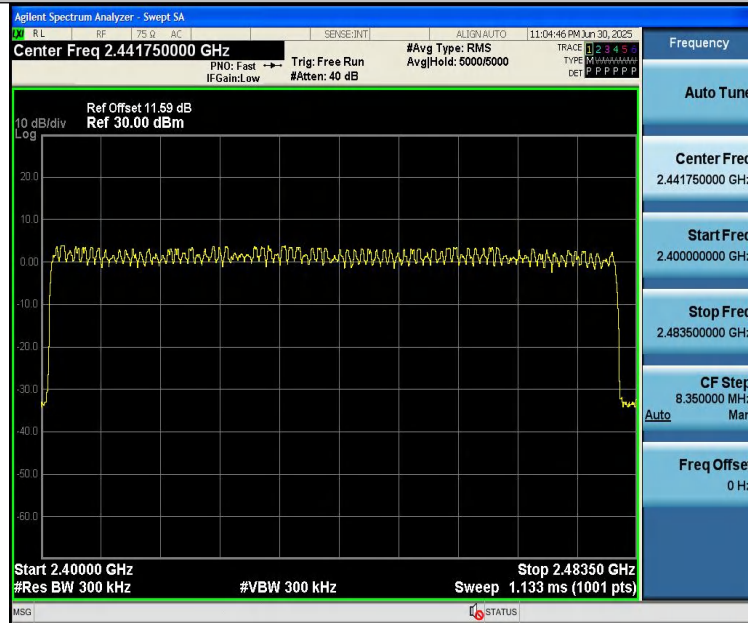

3DH5-Ant1-Hop-PASS

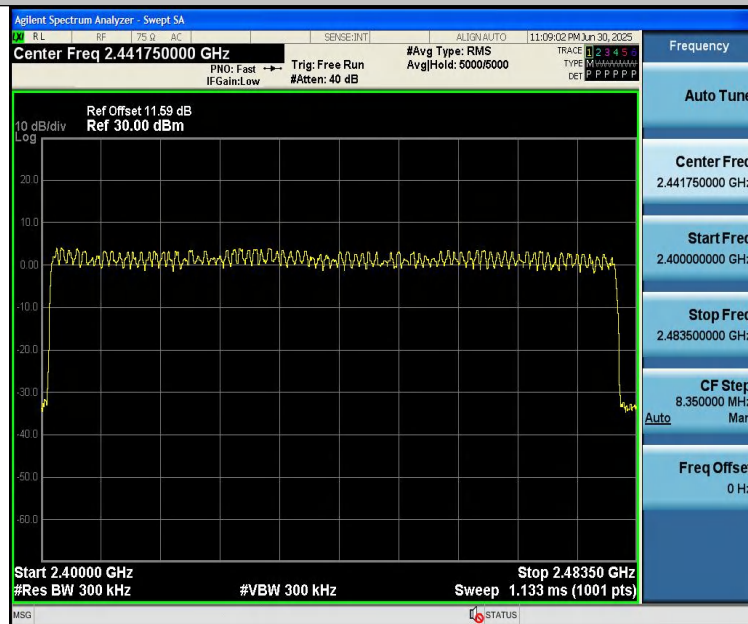




R:


DH5-Ant1-Hop-PASS



2DH5-Ant1-Hop-PASS

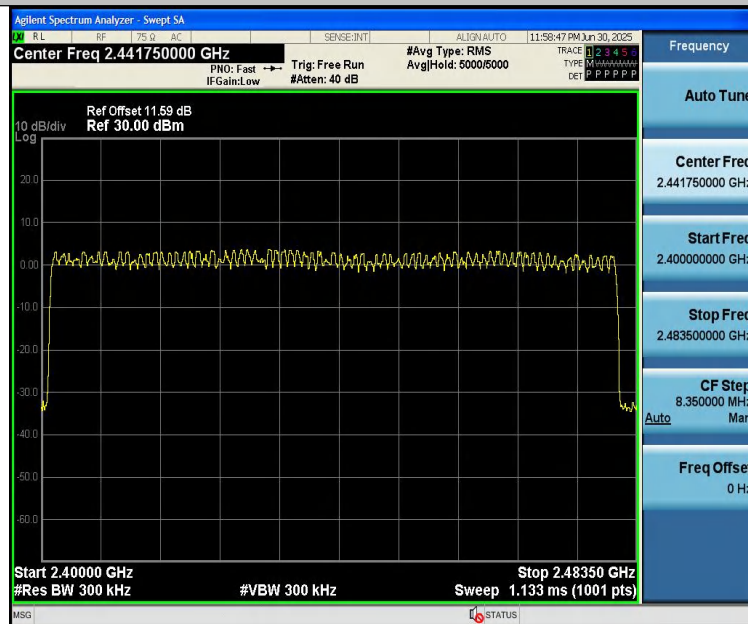

3DH5-Ant1-Hop-PASS

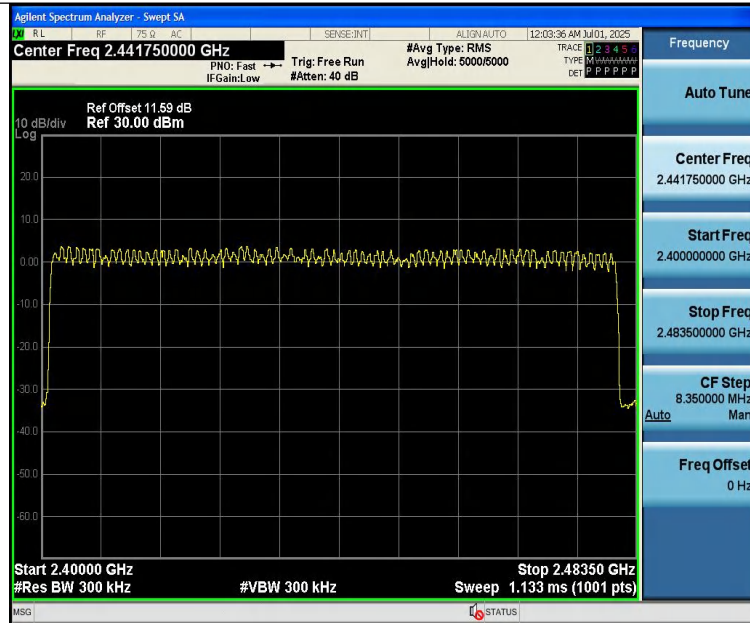




12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = clear write.
7. Allow trace to fully stabilize.



12.4 Test Data

Test Item : Time of Occupancy
Test Voltage : 3.7V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24.5°C
Humidity : 55%RH

L:

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.910	106.67	0.31	≤0.4	PASS
2DH5	Ant1	Hop	2.916	106.67	0.311	≤0.4	PASS
3DH5	Ant1	Hop	2.917	106.67	0.311	≤0.4	PASS
DH1	Ant1	Hop	0.405	320	0.13	≤0.4	PASS
2DH1	Ant1	Hop	0.414	320	0.132	≤0.4	PASS
3DH1	Ant1	Hop	0.417	320	0.133	≤0.4	PASS
DH3	Ant1	Hop	1.662	160	0.266	≤0.4	PASS
2DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS
3DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS

R:

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.908	106.67	0.31	≤0.4	PASS
2DH5	Ant1	Hop	2.915	106.67	0.311	≤0.4	PASS
3DH5	Ant1	Hop	2.918	106.67	0.311	≤0.4	PASS
DH1	Ant1	Hop	0.404	320	0.129	≤0.4	PASS
2DH1	Ant1	Hop	0.414	320	0.132	≤0.4	PASS
3DH1	Ant1	Hop	0.418	320	0.134	≤0.4	PASS
DH3	Ant1	Hop	1.661	160	0.266	≤0.4	PASS
2DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS
3DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS

Note:

- 1.DH1/2DH1/3DH1 Dwell Time: Reading * (1600/2)*31.6/(channel number).
- 2.DH3/2DH3/3DH3 Dwell Time: Reading * (1600/4)*31.6/(channel number).
- 3.DH5/2DH5/3DH5 Dwell Time: Reading * (1600/6)*31.6/(channel number).



Test Graphs:

L:

DH5-Ant1-Hop-PASS




2DH5-Ant1-Hop-PASS




3DH5-Ant1-Hop-PASS




DH1-Ant1-Hop-PASS

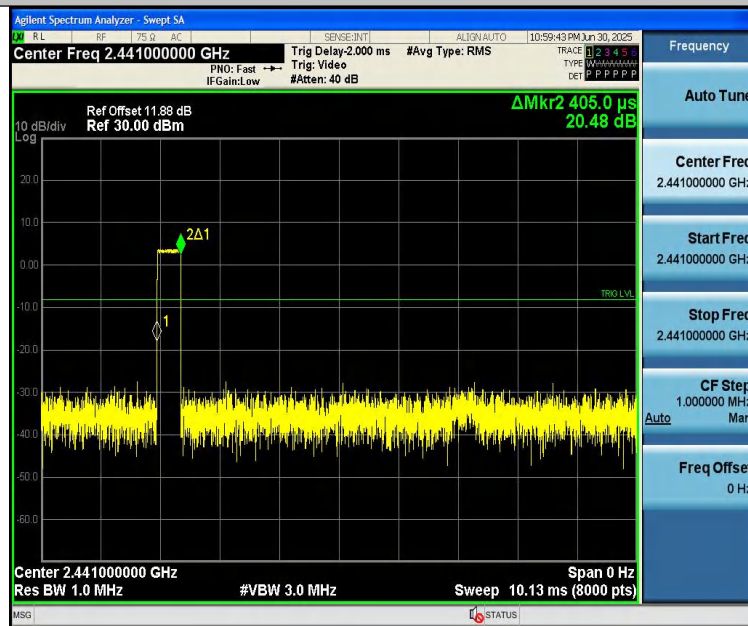

2DH1-Ant1-Hop-PASS

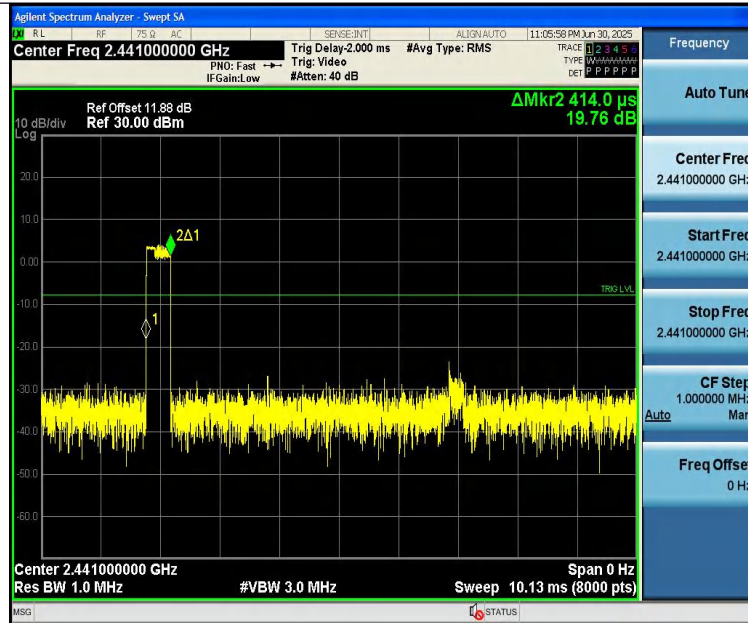

3DH1-Ant1-Hop-PASS

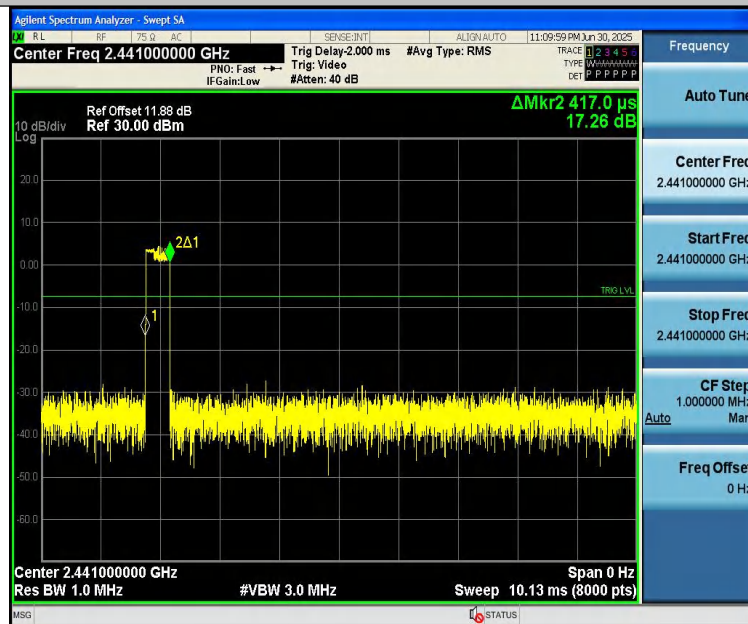

DH3-Ant1-Hop-PASS