


TEST REPORT

Application No.: BTEK240715010AE
Applicant: SHAREUAV Ltd
Address of Applicant: 7 Floor,A2 Building,Chuangzhiyuncheng,Liuxian Avenue,Nanshan District, Shenzhen, China
Manufacturer: SHAREUAV Ltd
Address of Manufacturer: 7 Floor,A2 Building,Chuangzhiyuncheng,Liuxian Avenue,Nanshan District, Shenzhen, China
Equipment Under Test (EUT):
EUT Name: SHARE Real-Scene 3D LiDAR Scanner
Test Model.: SHARE SLAM S10
Adding Model(s): /
Trade Mark: SHARE
FCC ID: 2BHL2-SLAM S10
Standard(s) : 47 CFR Part 15, Subpart C 15.247
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013
Date of Receipt: 2024-07-15
Date of Test: 2024-07-16 to 2024-08-07
Date of Issue: 2024-08-28

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Lion Cai/ Approved & Authorized
EMC Laboratory Manager



Revision Record				
Version	Chapter	Date	Modifier	Remark
V0		2024-08-08		Original
V1		2024-08-28		1.Updated page 26 and BTEK240715010AE001_2.4G WIFI Appendix

Authorized for issue by:				
		Zora . Huang		
		Zora Huang/Project Engineer		
		June Li		
		June Li/Reviewer		

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



2 Test Summary

Radio Spectrum Technical Requirement				
Standard	Item	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
47 CFR Part 15, Subpart C 15.247	Conducted Emissions at AC Power Line (150kHz-30MHz)	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
	Conducted Peak Output Power	ANSI C63.10 (2013) Section 11.9.1.3	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
	Minimum 6dB Bandwidth	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
	Power Spectrum Density	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
	Conducted Band Edges Measurement	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
	Conducted Spurious Emissions	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
	Radiated Emissions which fall in the restricted bands	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
	Radiated Spurious Emissions	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



3 Contents

	Page
1 Cover Page.....	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.	5
4.2 EUT Test Mode and Test Condition	5
4.3 Measurement Uncertainty	6
4.4 Test Location	7
4.5 Deviation from Standards	7
4.6 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement	10
6.1 Antenna Requirement	10
6.1.1 Test Requirement:	10
6.1.2 Conclusion	10
7 Radio Spectrum Matter Test Results	11
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	11
7.1.1 Test Setup Diagram	11
7.1.2 Measurement Procedure and Data	11
7.2 Conducted Peak Output Power	14
7.2.1 Test Setup Diagram	14
7.2.2 Measurement Procedure and Data	14
7.3 Minimum 6dB Bandwidth	15
7.3.1 Test Setup Diagram	15
7.3.2 Measurement Procedure and Data	15
7.4 Power Spectrum Density	16
7.4.1 Test Setup Diagram	16
7.4.2 Measurement Procedure and Data	16
7.5 Conducted Band Edges Measurement	17
7.5.1 Test Setup Diagram	17
7.5.2 Measurement Procedure and Data	17
7.6 Conducted Spurious Emissions	18
7.6.1 Test Setup Diagram	18
7.6.2 Measurement Procedure and Data	18
7.7 Radiated Emissions which fall in the restricted bands	19
7.7.1 Test Setup Diagram	19
7.7.2 Measurement Procedure and Data	20
7.8 Radiated Spurious Emissions	23
7.8.1 Test Setup Diagram	23
7.8.2 Measurement Procedure and Data	24
8 Test Setup Photo	30
9 EUT Constructional Details (EUT Photos)	30



4 General Information

4.1 Details of E.U.T.

Power supply:	Adapter: GaN 65W Fast Charger (2C1A) Model: CD296 Adapter Input: AC 100-240V/1.8Amax USB-C1/C2 Output: 5.0V= 3.0A/9.0V= 3.0A/12.0V= 3.0A 15.0V= 3.0A/20.0V= 3.25A/3.3-21.0V= 3.0A 65.0W Max USB-A Output: 4.5V= 5.0A/5.0V= 4.5A/5.0V= 3.0A/9.0V= 2.0A 12.0V= 1.5A 22.5W Max Total Output Power: 65.0W Max Hand shank input: Rechargeable Li-ion Battery Model: C1405A1 Nominal Voltage: 14.4V= Rated Capacity: 3150mAh Nominal Energy: 45.36Wh Limited Charging Voltage: 16.8V USB Port Input: 5V= 2A/PD30W
Support Standards:	802.11b, 802.11g, 802.11n-HT20, 802.11n-HT40
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20/HT40)
Type of Modulation:	802.11b: DSSS; 802.11g/n: OFDM
Quantity of Channels	11 for 802.11b/g/n(HT20) 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	FPC Antenna
Antenna Gain	ANT1: 1.64dBi ANT2: 1.64dBi
Sample No.:	BTEK240715008AE-01
Remark: The information in this section is provided by the applicant or manufacturer, BANTEK is not liable to the accuracy, suitability, reliability or/and integrity of the information.	

4.2 EUT Test Mode and Test Condition

Test Mode	Description	Remark
1	802.11b	2412MHz, 2437MHz, 2462MHz
2	802.11g	2412MHz, 2437MHz, 2462MHz
3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

Test Conditions	
Temperature:	23.5 °C
Relative Humidity:	46.3 %
ATM Pressure:	1010 mbar



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.12\text{dB}$
Conducted Peak Output Power	$\pm 0.75\text{dB}$
Minimum 6dB Bandwidth	$\pm 3\%$
Power Spectrum Density	$\pm 2.84\text{dB}$
Conducted Band Edges Measurement	$\pm 0.75\text{dB}$
Conducted Spurious Emissions	$\pm 0.75\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 5.08\text{dB}$ (1GHz-6GHz); $\pm 5.14\text{dB}$ (above 6GHz)
Radiated Spurious Emissions (Below 1GHz)	$\pm 5.06\text{dB}$ (3m); $\pm 4.46\text{dB}$ (10m)
Radiated Spurious Emissions (Above 1GHz)	$\pm 5.08\text{dB}$ (1GHz-6GHz); $\pm 5.14\text{dB}$ (above 6GHz)



4.4 Test Location

All tests were performed at:

Shenzhen BANTEK Testing Co., Ltd.

A5&A6, Building B1&B2, No.45 Gangtou Road, Bogang Community, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Tel: +86 0755-2334 4200 Fax: +86 0755-2334 4200

FCC Registration Number: 264293

Designation Number: CN1356

No tests were sub-contracted.

4.5 Deviation from Standards

None

4.6 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Shielding Room	YIHENG ENELECTRONIC	9*5*3.3	YH-BT-220304-04	2022-03-03	2025-03-02
EMI Test Receiver	Rohde&Schwarz	ESCI	101021	2024-06-11	2025-06-10
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	N/A	N/A
LISN	Rohde&Schwarz	ENV216	101472	2024-06-11	2025-06-10
LISN	Schwarzbeck	NSLK 8128	05127	2024-06-11	2025-06-10

RF Conducted					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
Shielding Room	YIHENG ENELECTRONIC	5.5*3.1*3	YH-BT-220304-03	2022-03-03	2025-03-02
EXA Signal Analyzer	KEYSIGHT	N9020A	MY54230486	2024-06-11	2025-06-10
DC Power Supply	E3632A	E3642A	KR75304416	2024-06-11	2025-06-10
Attenuator	RswTech	SMA-JK-6dB	N/A	2024-06-11	2025-06-10
Attenuator	RswTech	SMA-JK-3dB	N/A	2024-06-11	2025-06-10
RF Control Unit	Techy	TR1029-1	N/A	2024-06-11	2025-06-10
RF Sensor Unit	Techy	TR1029-2	N/A	2024-06-11	2025-06-10
WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	141258	2024-06-11	2025-06-10
MXG Vector Signal Generator	Agilent	N5182A	US46240522	2024-06-11	2025-06-10
Programmable Temperature&Humidity Chamber	GRT	GR-HWX1000	GR22051001	2024-06-11	2025-06-10
Measurement Software	TACHOY	RF TestSoft	N/A	N/A	N/A

RSE					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	YIHENG ENELECTRONIC	966	YH-BT-220304-01	2022-05-06	2025-05-05
EMI Test Receiver	Rohde&Schwarz	ESCI	100694	2024-06-11	2025-06-10
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	01324	2024-06-16	2025-06-15
Pre-Amplifier	Schwarzbeck	BBV 9745	#180	2024-06-11	2025-06-10
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	2024-06-11	2025-06-10
EXA Signal Analyzer	Keysight	N9020A	MY54440290	2024-06-11	2025-06-10
Horn Antenna	Schwarzbeck	BBHA 9120D	02695	2024-06-15	2025-06-14
Pre-Amplifier	Tonscend	TAP0118045	AP20K806109	2024-06-11	2025-06-10
Horn Antenna	SCHWARZBECK	BBHA9170	1157	2024-06-15	2025-06-14
Low Noise Pre-amplifier	SKET	LNPA-1840G-50	SK2022032902	2024-06-11	2025-06-10
Signal analyzer	ROHDE&SCHWARZ	FSQ40	100010	2024-06-11	2025-06-10
Loop Antenna	ETS	6502	00201177	2024-06-15	2025-06-14



General used equipment					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
Humidity/Temperature/B arometric Pressure Indicator	KUMAR	F132	N/A	2024-06-11	2025-06-10
Humidity/Temperature/B arometric Pressure Indicator	KUMAR	F132	N/A	2024-06-11	2025-06-10



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

This product has an Integral antenna, fulfill the requirement of this section.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2


Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

7.1.1 Test Setup Diagram

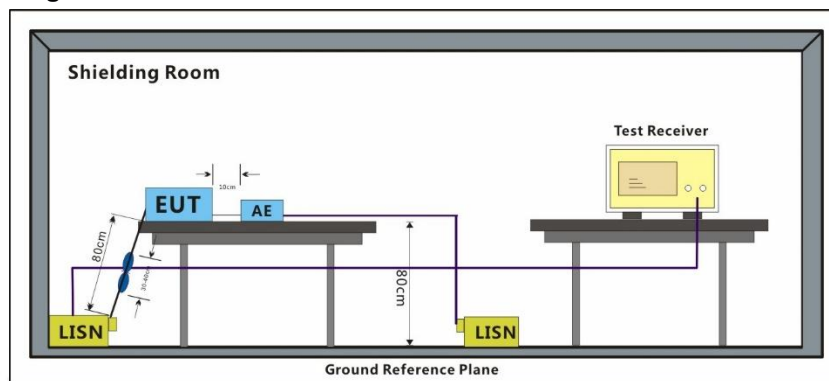


7.1.2 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor




Test Mode	Communication-TX	Polarity:	Neutral
-----------	------------------	-----------	---------

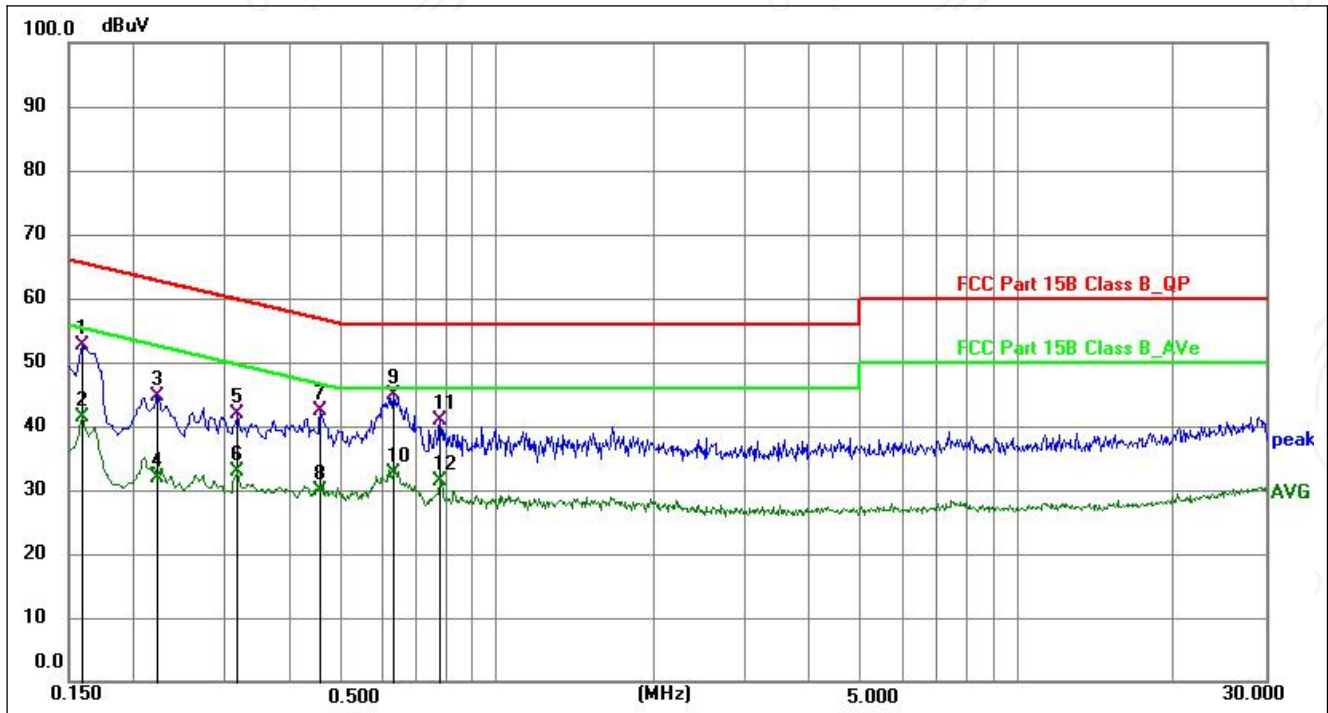

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	32.83	19.77	52.60	65.52	-12.92	QP	P	
2	0.1590	21.62	19.77	41.39	55.52	-14.13	AVG	P	
3	0.2220	24.93	19.82	44.75	62.74	-17.99	QP	P	
4	0.2220	12.12	19.82	31.94	52.74	-20.80	AVG	P	
5	0.3165	22.07	19.83	41.90	59.80	-17.90	QP	P	
6	0.3165	13.13	19.83	32.96	49.80	-16.84	AVG	P	
7	0.4560	22.47	19.84	42.31	56.77	-14.46	QP	P	
8	0.4560	10.09	19.84	29.93	46.77	-16.84	AVG	P	
9 *	0.6315	24.93	19.90	44.83	56.00	-11.17	QP	P	
10	0.6315	12.84	19.90	32.74	46.00	-13.26	AVG	P	
11	0.7755	20.94	19.94	40.88	56.00	-15.12	QP	P	
12	0.7755	11.40	19.94	31.34	46.00	-14.66	AVG	P	



Test Mode	Communication-TX	Polarity:	Line
-----------	------------------	-----------	------

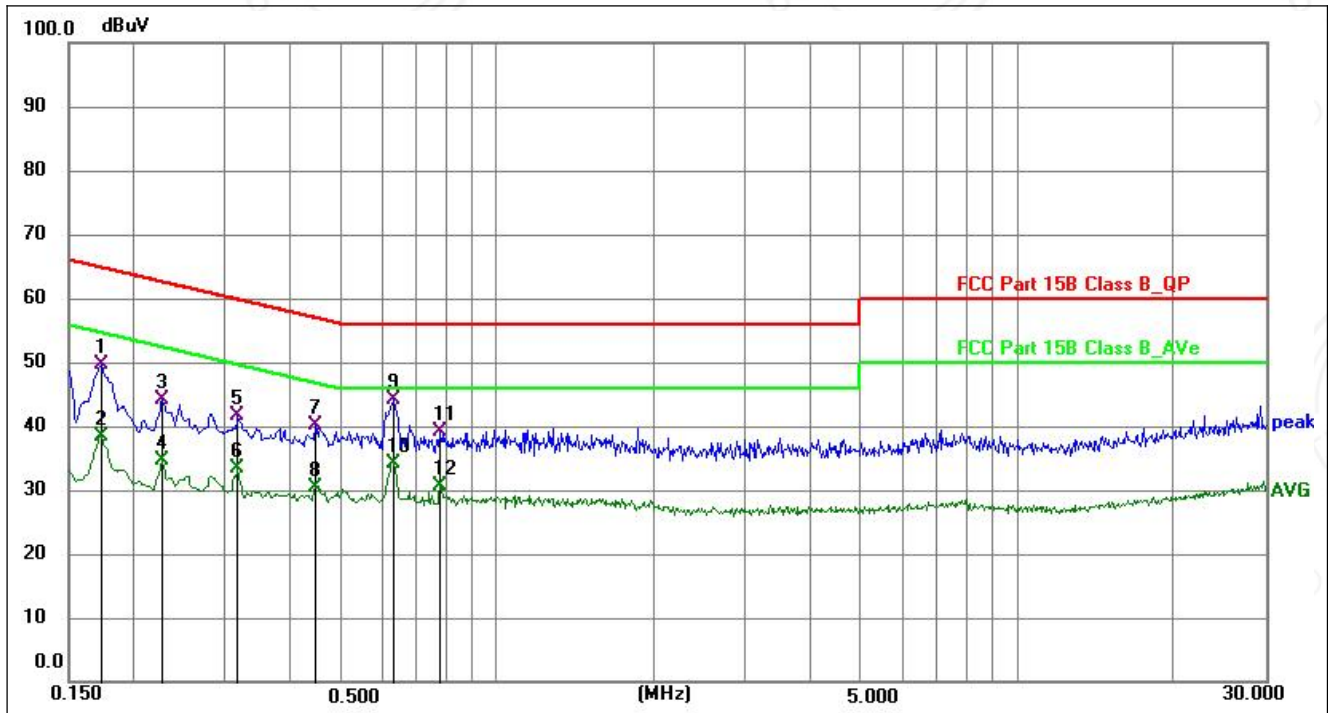

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1725	29.86	19.78	49.64	64.84	-15.20	QP	P	
2	0.1725	18.70	19.78	38.48	54.84	-16.36	AVG	P	
3	0.2265	24.38	19.81	44.19	62.58	-18.39	QP	P	
4	0.2265	14.72	19.81	34.53	52.58	-18.05	AVG	P	
5	0.3165	21.73	19.82	41.55	59.80	-18.25	QP	P	
6	0.3165	13.49	19.82	33.31	49.80	-16.49	AVG	P	
7	0.4470	20.27	19.83	40.10	56.93	-16.83	QP	P	
8	0.4470	10.43	19.83	30.26	46.93	-16.67	AVG	P	
9 *	0.6315	24.35	19.89	44.24	56.00	-11.76	QP	P	
10	0.6315	14.13	19.89	34.02	46.00	-11.98	AVG	P	
11	0.7755	19.24	19.94	39.18	56.00	-16.82	QP	P	
12	0.7755	10.78	19.94	30.72	46.00	-15.28	AVG	P	



7.2 Conducted Peak Output Power


Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1.3

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 Test Setup Diagram

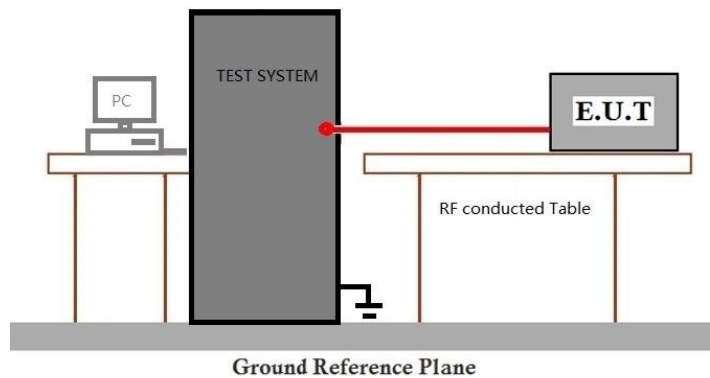

7.2.2 Measurement Procedure and Data

cable loss=0.83dB

Please Refer to Appendix for Details




7.3 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit: ≥ 500 kHz

7.3.1 Test Setup Diagram

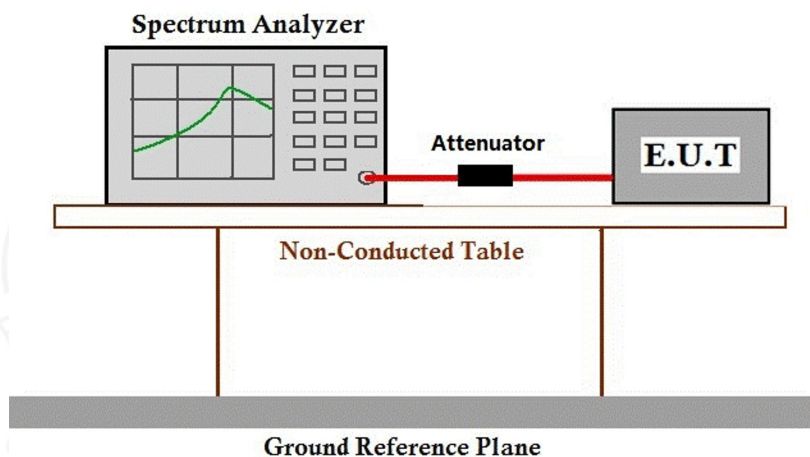

7.3.2 Measurement Procedure and Data

cable loss=0.83dB

Please Refer to Appendix for Details



7.4 Power Spectrum Density


Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

7.4.1 Test Setup Diagram

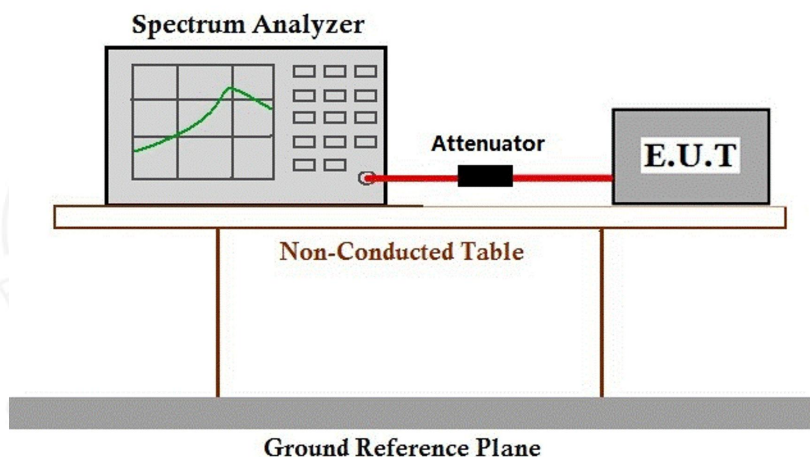

7.4.2 Measurement Procedure and Data

cable loss=0.83dB

Please Refer to Appendix for Details



7.5 Conducted Band Edges Measurement


Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.5.1 Test Setup Diagram

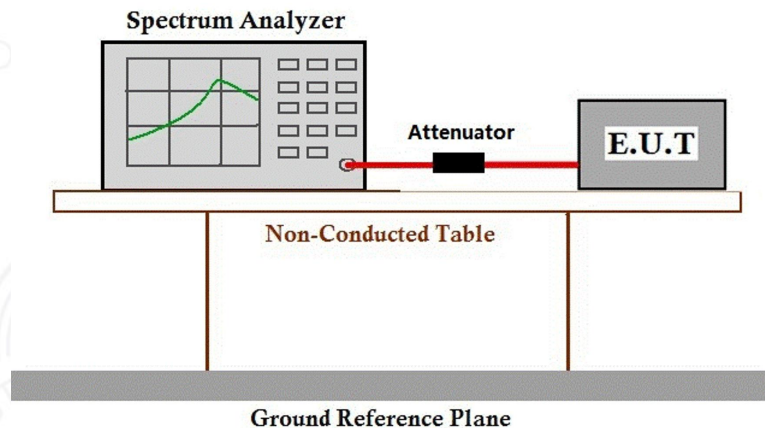

7.5.2 Measurement Procedure and Data

cable loss=0.83dB

Please Refer to Appendix for Details



7.6 Conducted Spurious Emissions


Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.6.1 Test Setup Diagram

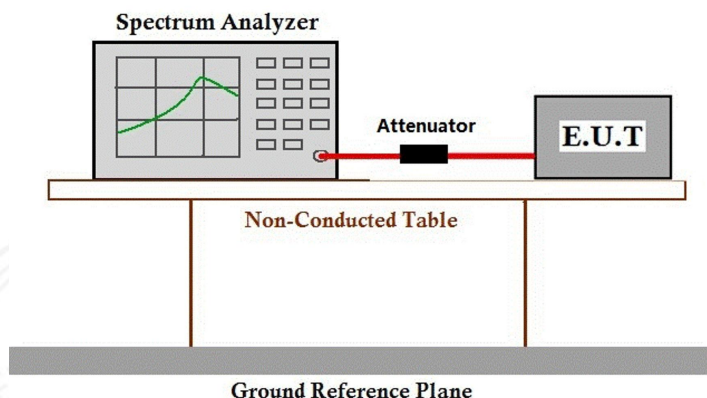

7.6.2 Measurement Procedure and Data

cable loss=0.83dB

Please Refer to Appendix for Details



7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209


Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:


Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.7.1 Test Setup Diagram

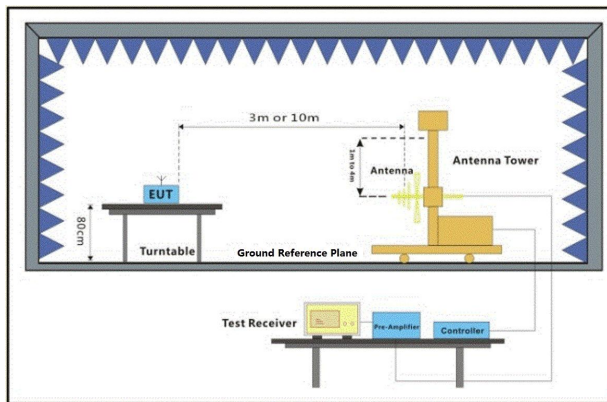

30MHz-1GHz

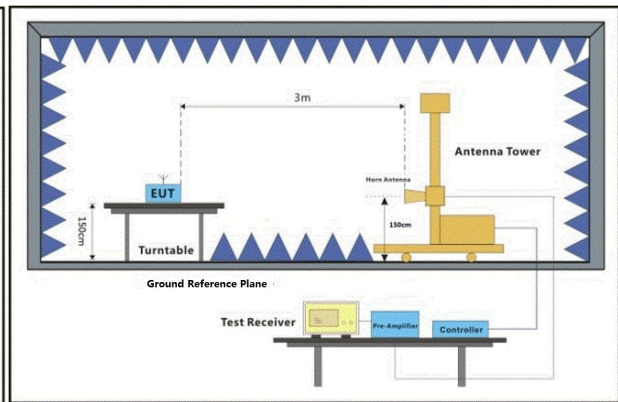

Above 1GHz



7.7.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



ANT 1:

Polarity: Horizontal; Worst case 802.11b ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	66.76	-24.14	42.62	74.00	-31.38	peak	P
2	2390.000	69.98	-23.92	46.06	74.00	-27.94	peak	P
3	2400.000	66.18	-23.92	42.26	74.00	-31.74	peak	P

Polarity: Vertical; Worst case 802.11b ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	67.15	-24.14	43.01	74.00	-30.99	peak	P
2	2390.000	68.52	-23.92	44.60	74.00	-29.40	peak	P
3	2400.000	69.26	-23.92	45.34	74.00	-28.66	peak	P

Polarity: Horizontal; Worst case 802.11b; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	70.18	-23.65	46.53	74.00	-27.47	peak	P
2	2500.000	72.72	-23.65	49.07	74.00	-24.93	peak	P

Polarity: Vertical; Worst case 802.11b ; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	69.63	-23.65	45.98	74.00	-28.02	peak	P
2	2500.000	73.54	-23.65	49.89	74.00	-24.11	peak	P



ANT 2:

Polarity: Horizontal; Worst case 802.11b ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	66.76	-24.14	42.62	74.00	-31.38	peak	P
2	2390.000	69.98	-23.92	46.06	74.00	-27.94	peak	P
3	2400.000	66.18	-23.92	42.26	74.00	-31.74	peak	P

Polarity: Vertical; Worst case 802.11b ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	67.15	-24.14	43.01	74.00	-30.99	peak	P
2	2390.000	68.52	-23.92	44.60	74.00	-29.40	peak	P
3	2400.000	69.26	-23.92	45.34	74.00	-28.66	peak	P

Polarity: Horizontal; Worst case 802.11b; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	70.18	-23.65	46.53	74.00	-27.47	peak	P
2	2500.000	72.72	-23.65	49.07	74.00	-24.93	peak	P

Polarity: Vertical; Worst case 802.11b ; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	69.63	-23.65	45.98	74.00	-28.02	peak	P
2	2500.000	73.54	-23.65	49.89	74.00	-24.11	peak	P



7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209




Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 Test Setup Diagram

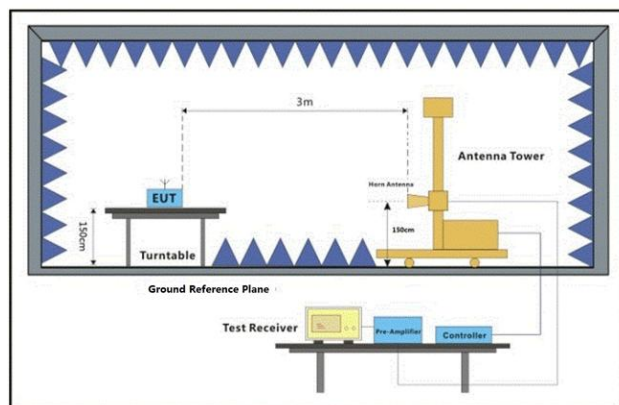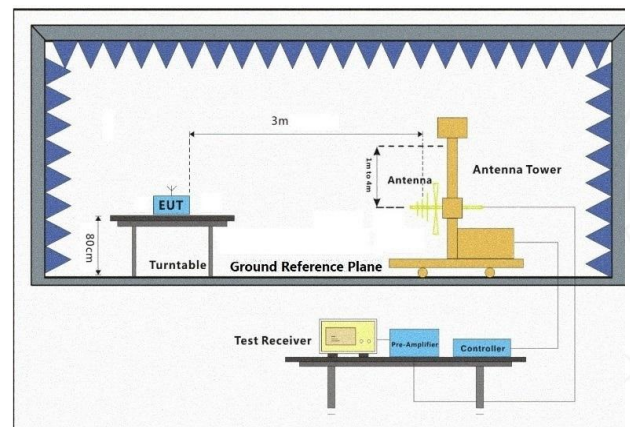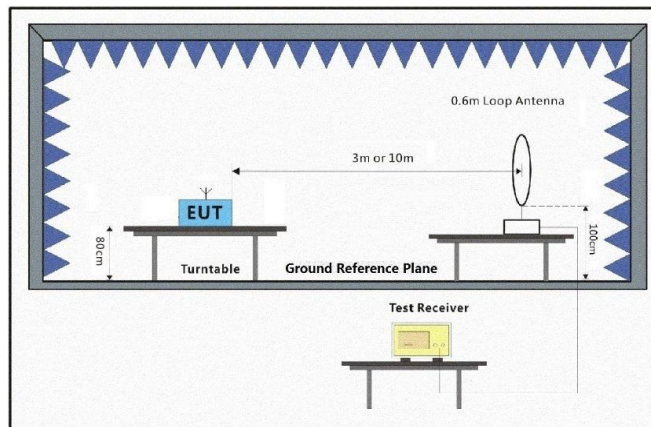

Above 1GHz




7.8.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.



Spurious Emissions Below 1GHz

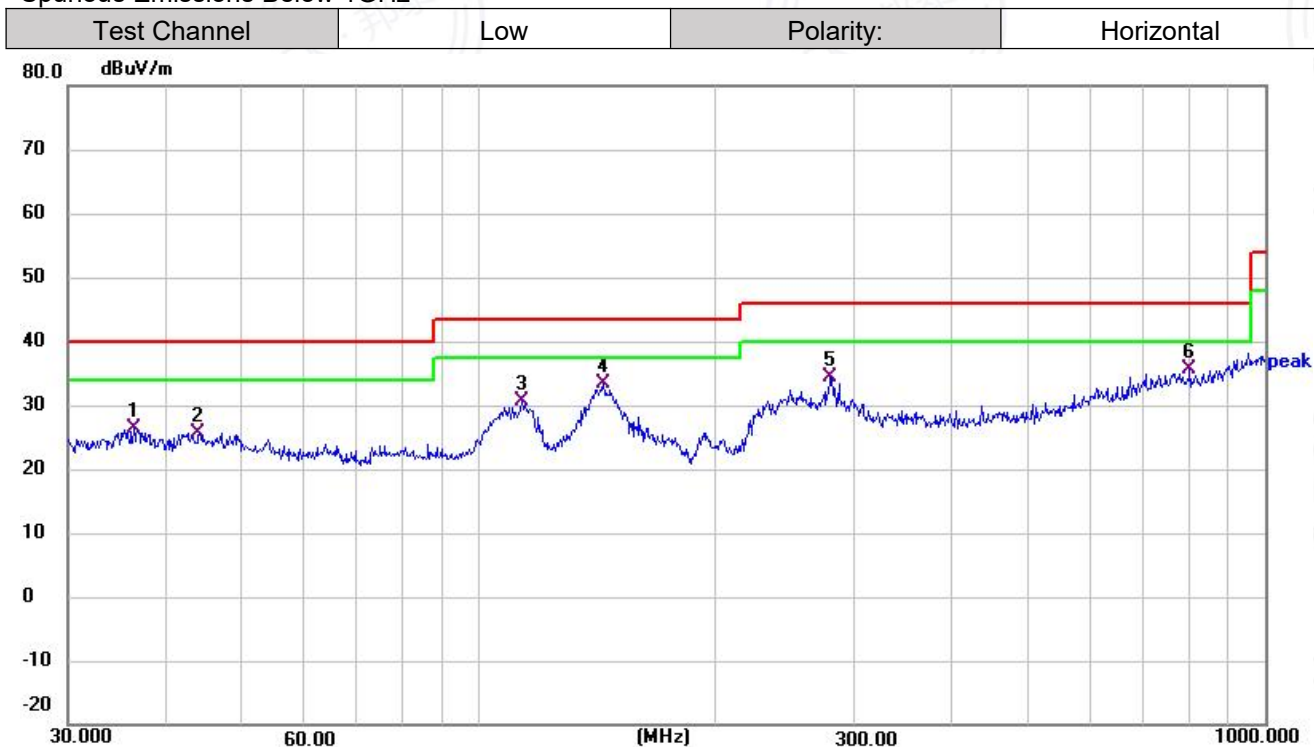

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	36.3813	45.12	-18.85	26.27	40.00	-13.73	QP	150	360	P	
2	44.1200	45.08	-19.45	25.63	40.00	-14.37	QP	150	360	P	
3	113.3161	51.81	-21.24	30.57	43.50	-12.93	QP	150	360	P	
4 *	143.8292	52.18	-18.74	33.44	43.50	-10.06	QP	150	360	P	
5	280.0237	53.51	-19.14	34.37	46.00	-11.63	QP	150	360	P	
6	801.7862	43.80	-8.24	35.56	46.00	-10.44	QP	150	360	P	



Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	37.4164	52.11	-18.69	33.42	40.00	-6.58	QP	150	0	P	
2	48.1625	48.41	-19.26	29.15	40.00	-10.85	QP	150	0	P	
3	81.4970	53.74	-23.62	30.12	40.00	-9.88	QP	150	0	P	
4	107.8876	53.19	-21.49	31.70	43.50	-11.80	QP	150	0	P	
5	146.3734	47.74	-18.49	29.25	43.50	-14.25	QP	150	0	P	
6	229.2930	49.01	-20.77	28.24	46.00	-17.76	QP	150		P	

Remark:

1) Through pre-scan 802.11b/g/n found the worst case is ANT 2 802.11b lowest channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Reading Level + Factor

3) Scan from 9kHz to 1 GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Polarity: Horizontal; Worst case 802.11b; Channel:Low

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4801.233	65.91	-15.60	50.31	74.00	-23.69	peak	P
2	7320.000	58.45	-10.97	47.48	74.00	-26.52	peak	P

; Polarity: Vertical; Worst case 802.11b; Channel:Low

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4802.558	67.23	-15.60	51.63	74.00	-22.37	peak	P
2	7320.000	58.00	-10.97	47.03	74.00	-26.97	peak	P

Polarity: Horizontal; Worst case 802.11b; Channel:middle

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4879.045	68.37	-15.60	52.77	74.00	-21.23	peak	P
2	7320.000	58.37	-10.97	47.40	74.00	-26.60	peak	P

Polarity: Vertical; Worst case 802.11b; Channel:middle

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4880.253	65.80	-15.60	50.20	74.00	-23.80	peak	P
2	7320.000	58.95	-10.97	47.98	74.00	-26.02	peak	P

Polarity: Horizontal; Worst case 802.11b; Channel:High

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4960.077	67.62	-15.60	52.02	74.00	-21.98	peak	P
2	7439.647	58.39	-10.97	47.42	74.00	-26.58	peak	P

Polarity: Vertical; Worst case 802.11b; Channel:High

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4960.000	67.35	-15.60	51.75	74.00	-22.25	peak	P
2	7440.000	58.97	-10.97	48.00	74.00	-26.00	peak	P



ANT 2

Polarity: Horizontal; Worst case 802.11b; Channel:Low

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4802.356	66.20	-15.60	50.60	74.00	-23.40	peak	P
2	7206.000	57.76	-10.97	46.79	74.00	-27.21	peak	P

; Polarity: Vertical; Worst case 802.11b; Channel:Low

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4802.882	66.54	-15.60	50.94	74.00	-23.06	peak	P
2	7206.000	57.65	-10.97	46.68	74.00	-27.32	peak	P

Polarity: Horizontal; Worst case 802.11b; Channel:middle

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4879.281	69.30	-15.60	53.70	74.00	-20.30	peak	P
2	7320.000	58.62	-10.97	47.65	74.00	-26.35	peak	P

Polarity: Vertical; Worst case 802.11b; Channel:middle

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4879.303	66.51	-15.60	50.91	74.00	-23.09	peak	P
2	7320.000	58.81	-10.97	47.84	74.00	-26.16	peak	P

Polarity: Horizontal; Worst case 802.11b; Channel:High

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4959.302	66.65	-15.60	51.05	74.00	-22.95	peak	P
2	7439.403	58.67	-10.97	47.70	74.00	-26.30	peak	P

Polarity: Vertical; Worst case 802.11b; Channel:High

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector	P/F
1	4960.000	68.13	-15.60	52.53	74.00	-21.47	peak	P
2	7440.000	59.35	-10.97	48.38	74.00	-25.62	peak	P

Remark:

1) Through pre-scan 802.11b/g/n mode found the worst case is 802.11b . Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Reading Level + Factor



3) Testing is carried out with frequency rang 1GHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

4) If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.



8 Test Setup Photo

Please refer to the Appendix Test Setup Photos

9 EUT Constructional Details (EUT Photos)

Please refer to the Appendix EUT Photos

- End of the Report -

