



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

2. SCHEMATICS:

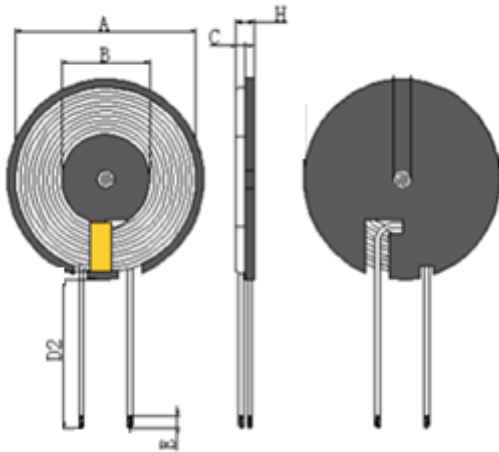

A	B	C	D2	E	H				I
43.5±0.2	50±0.5	0.5±0.05	20±2	3±1.5	1.2±0.2				

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	热风线 ϕ 0.08*24*2 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q值	HI-POT
TEST	线圈加磁片	S-F	单独线圈		
CON	100KHz, 0.25V	AT 25°C	100KHz, 0.25V		
SPEC	6.3uH±10%	60m Ω Max	3.8uH±15%		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	0.08*24*2热风线	0.08*24*2热风线	NANJINGJINNINGCO,LTD	
2	无铅锡条	无铅锡条	QIAODO	
3	磁片	ϕ 44*0.8锰锌硬磁片开L槽	TAIYI CO.,LTD	
4	胶水	黄胶9999	LIANCHENG CO.,LTD	
5	高温胶纸	8mm宽高温胶纸	CUDAK CO.,LTD	
6	背胶	ϕ 41.5*0.1	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G43.8开槽+背胶
DRAWN BY	CHECKED BY		APPROVED BY
何伟华	韦立红		韦立红