

FCC TEST REPORT

FCC ID:2BHMA-J01

Product : Bluetooth headphones
Model Name : J01, J02, J03, J05, J06, J07, J08, J09, J10,
J11, J12, J13, J15, J16, J17, J18, J19, J20
Brand : /
Report No. : NCT24025502E

Prepared for

Shenzhen Le Shen Shi Ting Technology Co., Ltd.
Unit 913, Plaza Building, No. 4 Baomin 1st Road, Jian'an Community, Xin'an Street,
Bao'an District, Shenzhen.

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.
A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Le Shen Shi Ting Technology Co., Ltd.
Address : Unit 913, Plaza Building, No. 4 Baomin 1st Road, Jian'an Community,
Xin'an Street, Bao'an District, Shenzhen.
Manufacture's name : Shenzhen Le Shen Shi Ting Technology Co., Ltd.
Address : Unit 913, Plaza Building, No. 4 Baomin 1st Road, Jian'an Community,
Xin'an Street, Bao'an District, Shenzhen.
Product name : Bluetooth headphones
Model name : J01, J02, J03, J05, J06, J07, J08, J09, J10, J11, J12, J13, J15, J16,
J17, J18, J19, J20
Standards : FCC CFR47 Part 15 Section 15.247
ANSI C63.10:2013
Test procedure : KDB 558074 D01 v05r02
Test Date : Jul. 04, 2024 - Jul. 18, 2024
Date of Issue : Jul. 18, 2024
Test Result : Pass

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

Technical Manager:



Kevin Wei / Engineer

Henry Wang / Manager


Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	6
3 TEST FACILITY	7
4 GENERAL INFORMATION	8
4.1 GENERAL DESCRIPTION OF E.U.T.	8
4.2 CHANNEL LIST	9
4.3 TEST SETUP CONFIGURATION	11
4.4 TEST MODE	11
5 EQUIPMENT DURING TEST	12
5.1 EQUIPMENTS LIST	12
5.2 MEASUREMENT UNCERTAINTY	14
5.3 DESCRIPTION OF SUPPORT UNITS	14
6 CONDUCTED EMISSION	15
6.1 E.U.T. OPERATION	15
6.2 EUT SETUP	15
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
6.4 MEASUREMENT PROCEDURE:	16
6.5 CONDUCTED EMISSION LIMIT	16
6.6 MEASUREMENT DESCRIPTION	16
6.7 CONDUCTED EMISSION TEST RESULT	16
7 RADIATED SPURIOUS EMISSIONS	21
7.1 EUT OPERATION	21
7.2 TEST SETUP	22
7.3 SPECTRUM ANALYZER SETUP	23
7.4 TEST PROCEDURE	24
7.5 SUMMARY OF TEST RESULTS	25
8 MAXIMUM PEAK OUTPUT POWER TEST(FOR FHSS)	52
8.1 TEST STANDARD AND LIMIT	52
8.2 TEST SETUP	52

8.3	TEST PROCEDURE.....	52
8.4	TEST DATA	53
9	20DB OCCUPY BANDWIDTH TEST(FOR FHSS).....	61
9.1	TEST STANDARD	61
9.2	TEST SETUP	61
9.3	TEST PROCEDURE.....	61
9.4	TEST DATA	62
10	CARRIER FREQUENCY SEPARATION TEST(FOR FHSS)	70
10.1	TEST STANDARD AND LIMIT	70
10.2	TEST SETUP	70
10.3	TEST PROCEDURE.....	70
10.4	TEST DATA	71
11	NUMBER OF HOPPING CHANNEL TEST(FOR FHSS).....	79
11.1	TEST STANDARD AND LIMIT	79
11.2	TEST SETUP	79
11.3	TEST PROCEDURE.....	79
11.4	TEST DATA	79
12	DWELL TIME TEST(FOR FHSS).....	85
12.1	TEST STANDARD AND LIMIT.....	85
12.2	TEST SETUP	85
12.3	TEST PROCEDURE.....	85
12.4	TEST DATA.....	86
13	100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT	94
13.1	TEST STANDARD AND LIMIT.....	94
13.2	TEST SETUP	94
13.3	TEST PROCEDURE.....	94
13.4	TEST DATA.....	94
14	ANTENNA REQUIREMENT	117
14.1	TEST STANDARD AND REQUIREMENT	117
14.2	ANTENNA CONNECTED CONSTRUCTION.....	117
15	6DB BANDWIDTH MEASUREMENT(FOR OTHER THAN FHSS).....	118
15.1	TEST PROCEDURE.....	118

15.2	TEST RESULT	118
16	MAXIMUM PEAK OUTPUT POWER(FOR OTHER THAN FHSS).....	123
16.1	TEST PROCEDURE.....	123
16.2	TEST RESULT	123
17	POWER SPECTRAL DENSITY(FOR OTHER THAN FHSS).....	128
17.1	TEST PROCEDURE.....	128
17.2	TEST RESULT	128
18	TEST SETUP & EUT PHOTOGRAPH.....	133

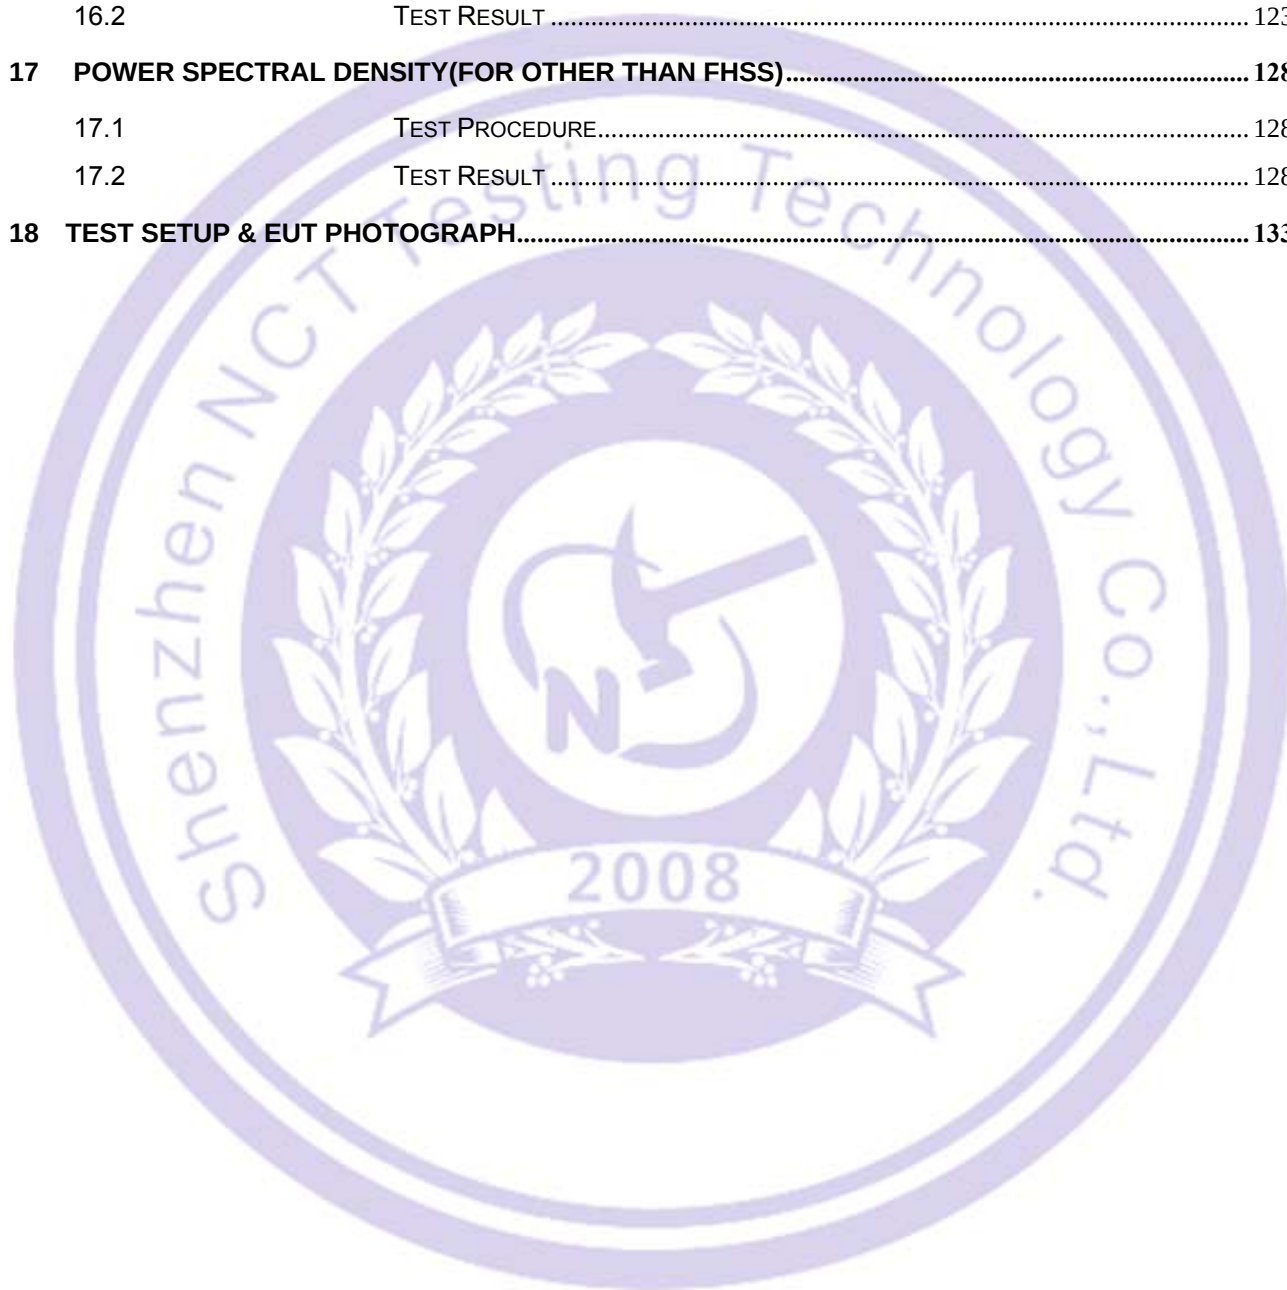

2 Test Summary

BT

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.205/15.209	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203/15.247 (c)	PASS

BLE

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205/15.209	PASS
Conducted Spurious Emission	15.205/15.209	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB&99% Bandwidth	15.247 (a)(2)	PASS
Maximum Peak Output Power	15.247 (b)(3)	PASS
Power Spectral Density	15.247 (e)	PASS
Antenna Requirement	15.203/15.247 (c)	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

3 TEST FACILITY

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan
District, Shenzhen, People's Republic of China

4 General Information

4.1 General Description of E.U.T.

Product Name	:	Bluetooth headphones
Model Name	:	J01
Sample ID	:	NCT24025502-001
Sample(s) Status:	:	Engineer sample
Additional model	:	J02, J03, J05, J06, J07, J08, J09, J10, J11, J12, J13, J15, J16, J17, J18, J19, J20
Difference	:	All the same except the model number
Operating frequency	:	BT:2402-2480MHz BLE:2402-2480MHz
Numbers of Channel	:	BT: 79 channels BLE: 40 channels
Antenna Type	:	Ceramic Antenna
Antenna Gain	:	3.12dBi
Type of Modulation	:	BT:GFSK, $\pi/4$ -DQPSK BLE: GFSK
Power supply	:	DC 3.7V from Battery or DC 5V from adapter input AC 120V/60Hz
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

4.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

BT

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	J01	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

Channel	Frequency(MHz)
0	2402
39	2441
78	2480

BLE

The details of test channels and bandwidth were for RF conductive measurement. The 3 channels of lower, medium and higher were chosen for test.


Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		


Channel	Frequency(MHz)
0	2402
19	2440
39	2480

4.3 Test Setup Configuration

Conducted Emission



Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



Conducted Spurious



4.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

BT

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	39	2441	78	2480

BLE

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	19	2440	39	2480

5 Equipment During Test

5.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/21	2025/6/20
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/21	2025/6/20
LISN	VN1-13S	004023	CRANAGE	2024/6/21	2025/6/20
Cable	RG223-1500MM	NA	RG	2024/6/21	2025/6/20

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2024/6/21	2025/6/20
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2024/6/21	2025/6/20
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNWARZBECK	2024/6/21	2025/6/20
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/21	2025/6/20
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHNWARZBECK	2024/6/21	2025/6/20
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB 1513-60	00115	SCHNWARZBECK	2024/6/21	2025/6/20
Amplifier (9KHz-30MHz)	BBV 9745	00109	CHNWARZBECK	2024/6/21	2025/6/20

MXG Signal Analyzer	N9020A	MY50510202	Agilent	2024/6/21	2025/6/20
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2024/6/21	2025/6/20
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2024/6/21	2025/6/20
Power Sensor	TR1029-2	512364	Techoy	2024/6/21	2025/6/20
RF Swith	TR1029-1	512364	Techoy	2024/6/21	2025/6/20
Cable	DA800-4000MM	NA	DA	2024/6/21	2025/6/20
Cable	DA800-11000MM	NA	DA	2024/6/21	2025/6/20

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Bluetooth headphones	N/A	J01	N/A	EUT
E-2	Adapter	anju	A18A-050100U-US2	AJ-230600002514	Auxiliary

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
Test Method: : ANSI C63.10:2013
Test Result: : PASS
Frequency Range: : 150kHz to 30MHz
Class/Severity: : Class B
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :


Temperature: : 23.2°C
Humidity: : 51 % RH
Atmospheric Pressure: : 101.12 kPa
Test Voltage : AC 120V/60Hz

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

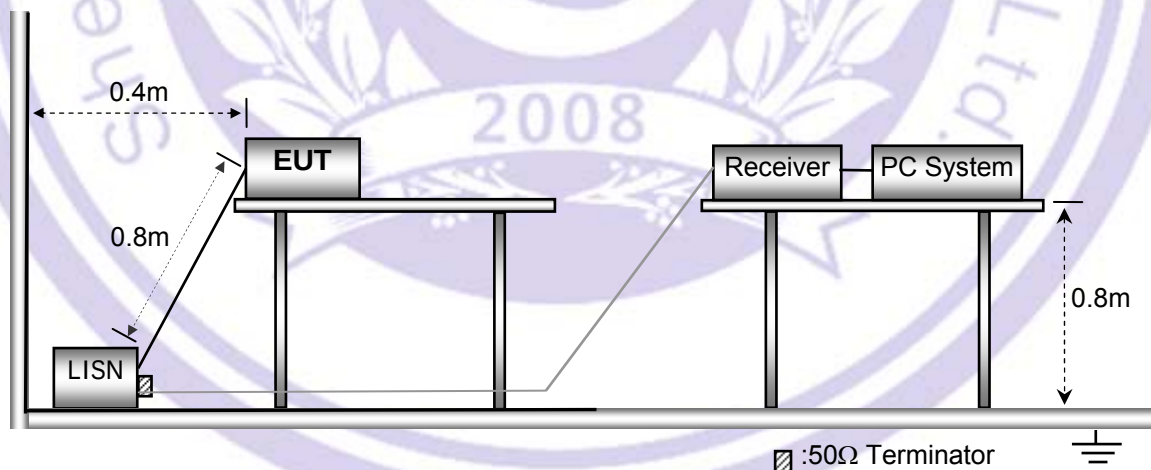

6.3 Test SET-UP (Block Diagram of Configuration)

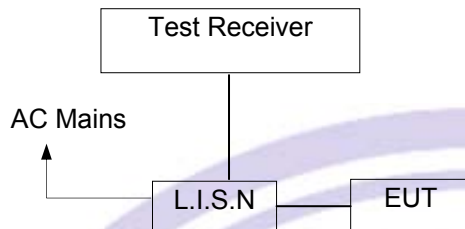

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.7 Conducted Emission Test Result

Pass

BT


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode ($\pi/4$ -DQPSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	Lowest	Phase :	L
----------	--------	---------	---

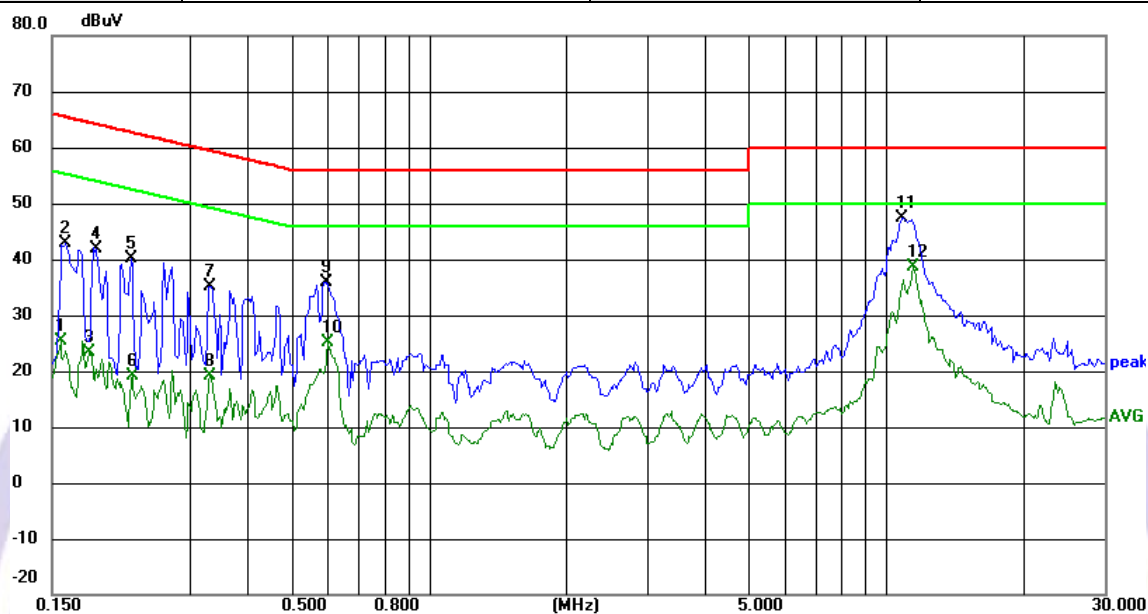

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1564	15.53	9.78	25.31	55.65	-30.34	AVG	P
2	0.1604	33.15	9.78	42.93	65.44	-22.51	peak	P
3	0.1811	13.60	9.76	23.36	54.44	-31.08	AVG	P
4	0.1872	32.16	9.76	41.92	64.16	-22.24	peak	P
5	0.2240	30.31	9.75	40.06	62.67	-22.61	peak	P
6	0.2242	9.44	9.75	19.19	52.66	-33.47	AVG	P
7	0.3331	25.48	9.76	35.24	59.37	-24.13	peak	P
8	0.3331	9.25	9.76	19.01	49.37	-30.36	AVG	P
9	0.5947	26.23	9.77	36.00	56.00	-20.00	peak	P
10	0.6023	15.47	9.77	25.24	46.00	-20.76	AVG	P
11	10.8155	37.19	10.20	47.39	60.00	-12.61	peak	P
12 *	11.4550	28.37	10.22	38.59	50.00	-11.41	AVG	P

Channel:	Lowest	Phase :	N
----------	--------	---------	---

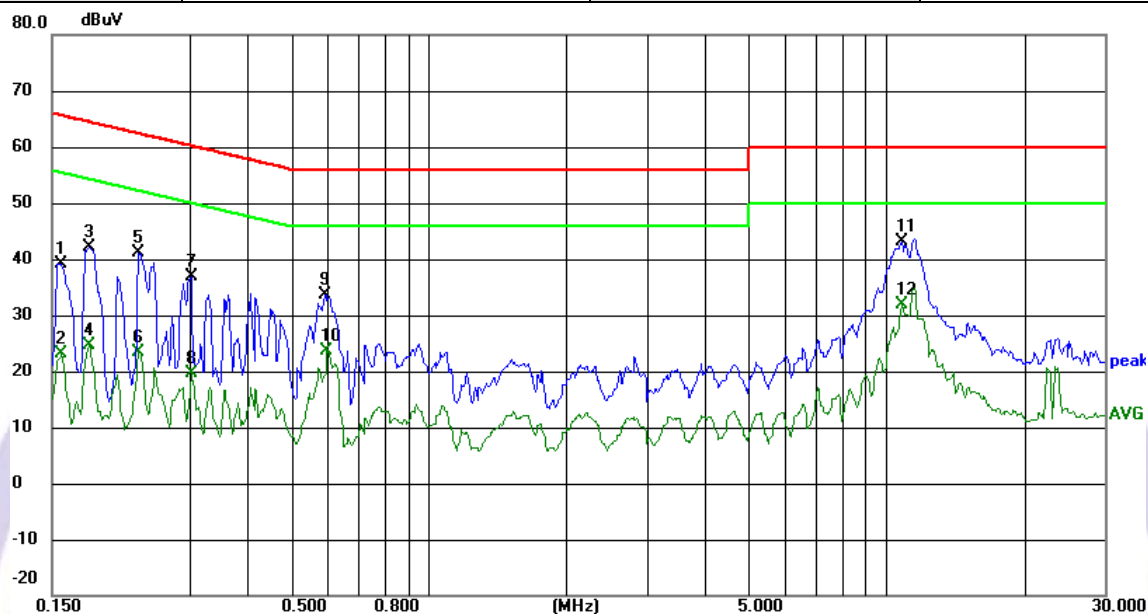

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1564	29.30	9.78	39.08	65.65	-26.57	peak	P
2	0.1577	13.41	9.78	23.19	55.58	-32.39	AVG	P
3	0.1811	32.28	9.76	42.04	64.44	-22.40	peak	P
4	0.1811	14.97	9.76	24.73	54.44	-29.71	AVG	P
5	0.2318	31.27	9.75	41.02	62.38	-21.36	peak	P
6	0.2318	13.71	9.75	23.46	52.38	-28.92	AVG	P
7	0.3019	27.14	9.76	36.90	60.19	-23.29	peak	P
8	0.3019	9.87	9.76	19.63	50.19	-30.56	AVG	P
9	0.5946	23.78	9.77	33.55	56.00	-22.45	peak	P
10	0.5985	13.96	9.77	23.73	46.00	-22.27	AVG	P
11 *	10.7957	32.93	10.20	43.13	60.00	-16.87	peak	P
12	10.7957	21.79	10.20	31.99	50.00	-18.01	AVG	P


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

BLE


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK, Lowest channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	Lowest	Phase :	L
----------	--------	---------	---

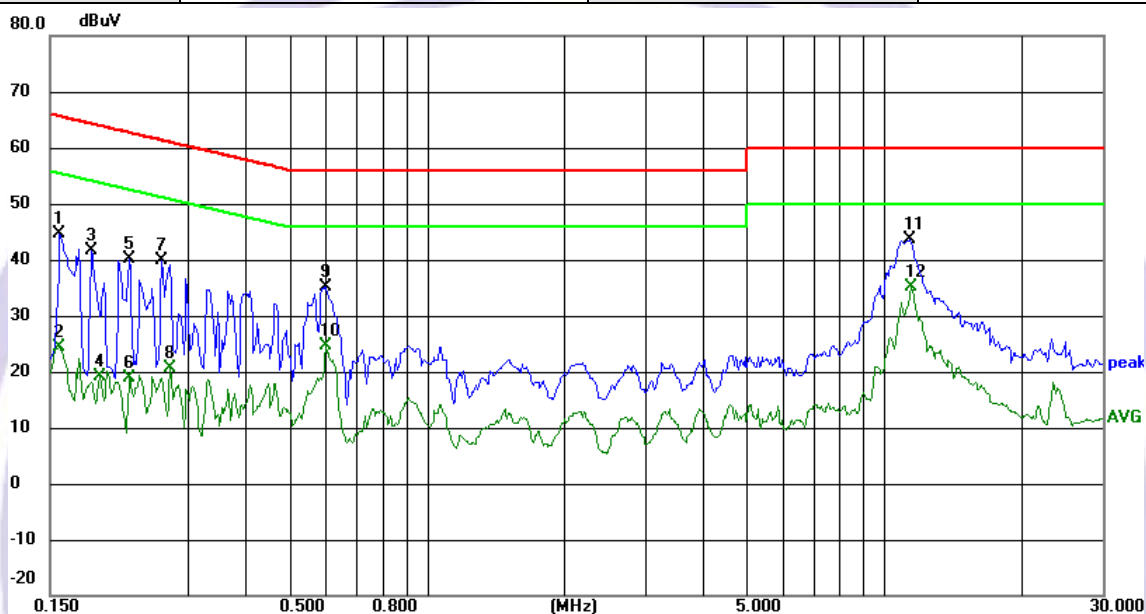

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1577	34.84	9.78	44.62	65.58	-20.96	peak	P
2	0.1577	14.65	9.78	24.43	55.58	-31.15	AVG	P
3	0.1849	31.78	9.76	41.54	64.26	-22.72	peak	P
4	0.1927	9.30	9.76	19.06	53.92	-34.86	AVG	P
5	0.2240	30.31	9.75	40.06	62.67	-22.61	peak	P
6	0.2240	9.21	9.75	18.96	52.67	-33.71	AVG	P
7	0.2631	30.17	9.75	39.92	61.33	-21.41	peak	P
8	0.2746	10.90	9.75	20.65	50.98	-30.33	AVG	P
9	0.6023	25.38	9.77	35.15	56.00	-20.85	peak	P
10	0.6023	14.97	9.77	24.74	46.00	-21.26	AVG	P
11	11.3498	33.38	10.22	43.60	60.00	-16.40	peak	P
12 *	11.4550	24.87	10.22	35.09	50.00	-14.91	AVG	P

Channel:	Lowest	Phase :	N
----------	--------	---------	---

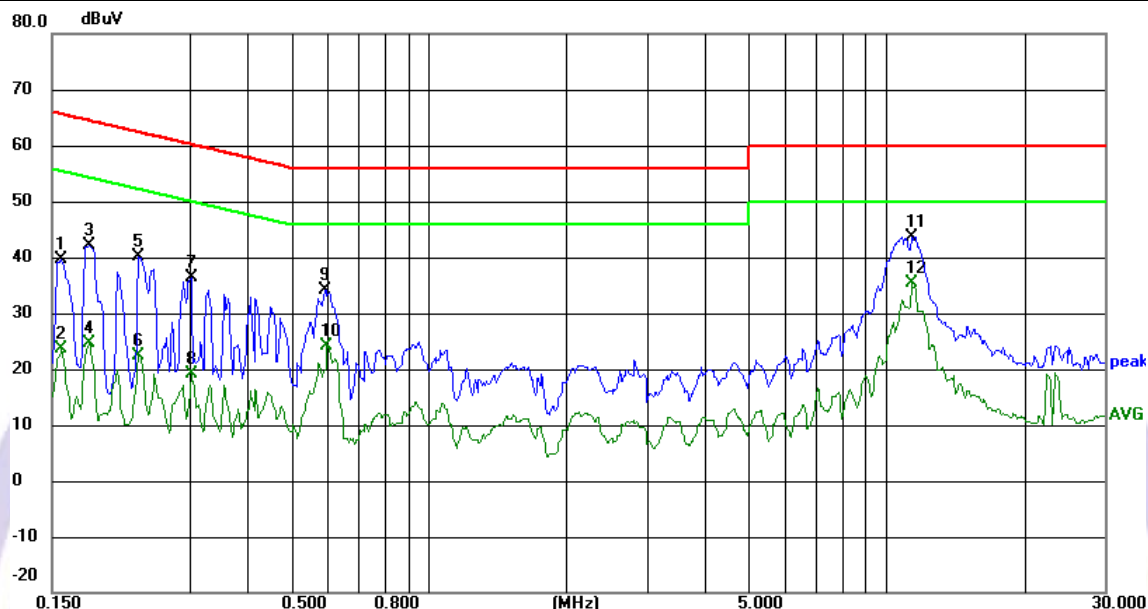

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1577	29.81	9.78	39.59	65.58	-25.99	peak	P
2	0.1577	13.91	9.78	23.69	55.58	-31.89	AVG	P
3	0.1811	32.28	9.76	42.04	64.44	-22.40	peak	P
4	0.1811	14.97	9.76	24.73	54.44	-29.71	AVG	P
5	0.2318	30.27	9.75	40.02	62.38	-22.36	peak	P
6	0.2318	12.71	9.75	22.46	52.38	-29.92	AVG	P
7	0.3019	26.64	9.76	36.40	60.19	-23.79	peak	P
8	0.3019	9.37	9.76	19.13	50.19	-31.06	AVG	P
9	0.5946	24.28	9.77	34.05	56.00	-21.95	peak	P
10	0.5985	14.46	9.77	24.23	46.00	-21.77	AVG	P
11	11.3694	33.52	10.22	43.74	60.00	-16.26	peak	P
12 *	11.3694	25.04	10.22	35.26	50.00	-14.74	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
Test Method : ANSI C63.10:2013
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
Humidity : 55.5% RH
Atmospheric Pressure : 101.3kPa
Test Voltage : AC 120V60Hz


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

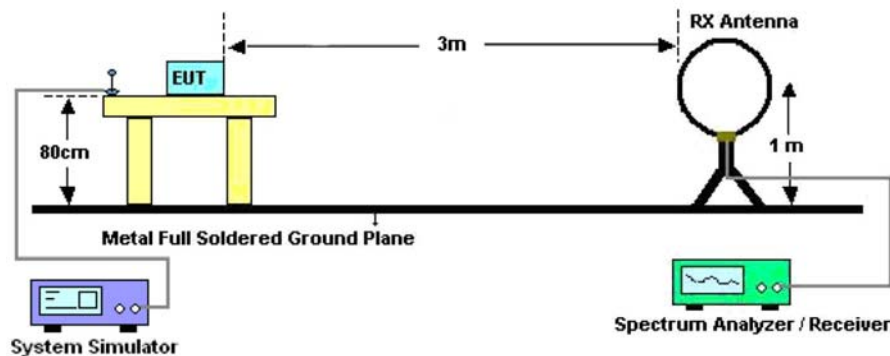

The test setup for emission measurement from 30 MHz to 1 GHz.

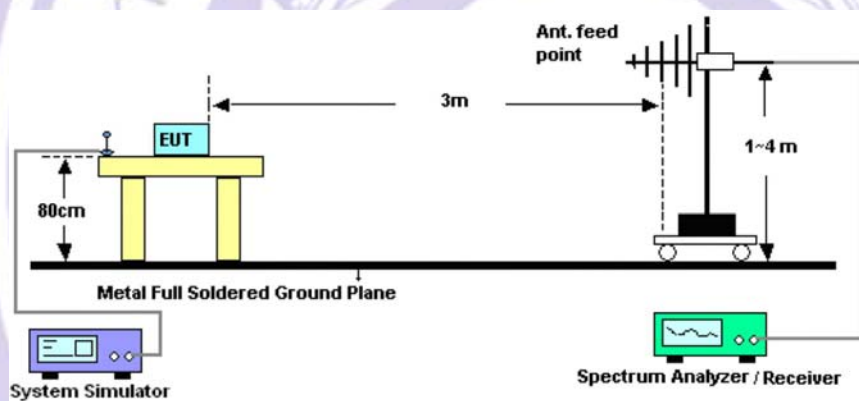

The test setup for emission measurement above 1 GHz.

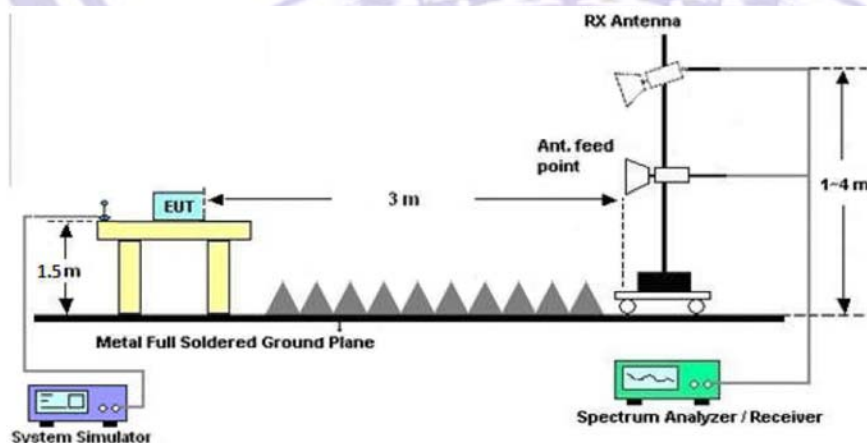

7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

BT

Please refer to the following test plots, Low Channel (2402MHz) Worst case $\pi/4$ -DQPSK for record:

Left earphone


Test plot for Horizontal

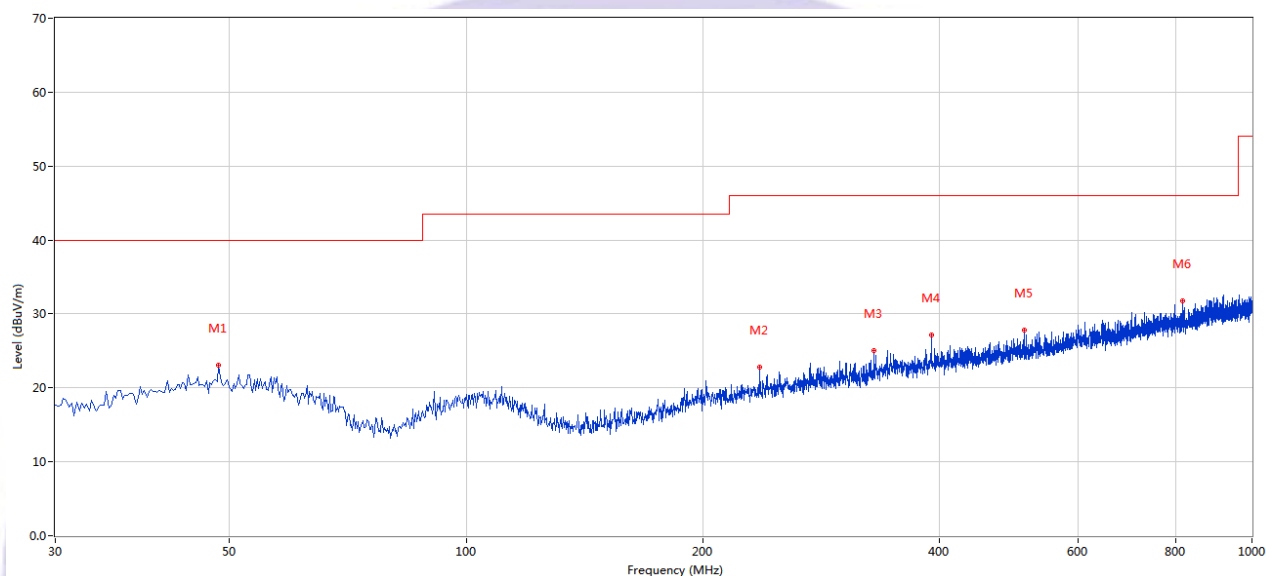

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	48.425	23.10	-11.22	40.0	16.90	Peak	Horizontal	Pass
2	236.558	22.86	-12.37	46.0	23.14	Peak	Horizontal	Pass
3	330.625	25.03	-10.19	46.0	20.97	Peak	Horizontal	Pass
4	390.992	27.10	-8.86	46.0	18.90	Peak	Horizontal	Pass
5	512.697	27.76	-6.86	46.0	18.24	Peak	Horizontal	Pass
6	816.716	31.81	-2.92	46.0	14.19	Peak	Horizontal	Pass

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test plot for Vertical

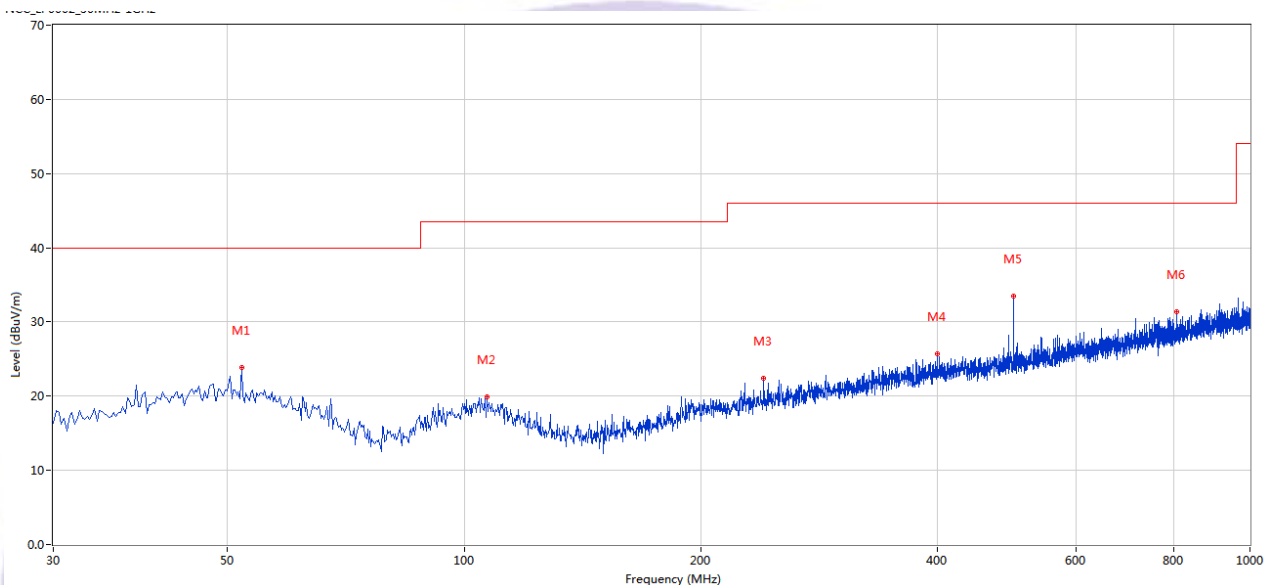


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	52.062	23.87	-11.43	40.0	16.13	Peak	Vertical	Pass
2	106.853	19.97	-13.38	43.5	23.53	Peak	Vertical	Pass
3	240.437	22.39	-12.34	46.0	23.61	Peak	Vertical	Pass
4	399.963	25.69	-8.57	46.0	20.31	Peak	Vertical	Pass
5	500.090	33.53	-6.91	46.0	12.47	Peak	Vertical	Pass
6	807.261	31.39	-3.14	46.0	14.61	Peak	Vertical	Pass

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Right earphone


Test plot for Horizontal

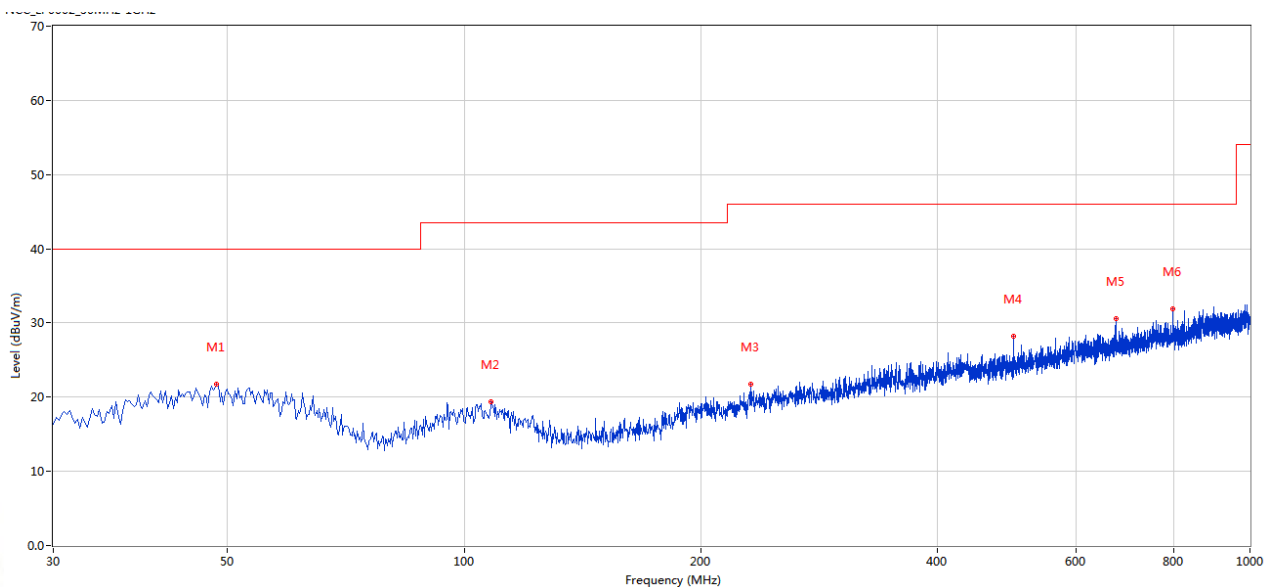

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	48.425	21.74	-11.22	40.0	18.26	Peak	Horizontal	Pass
2	108.308	19.36	-13.43	43.5	24.14	Peak	Horizontal	Pass
3	231.710	21.72	-12.58	46.0	24.28	Peak	Horizontal	Pass
4	499.848	28.22	-6.90	46.0	17.78	Peak	Horizontal	Pass
5	675.374	30.64	-4.37	46.0	15.36	Peak	Horizontal	Pass
6	797.563	31.87	-3.02	46.0	14.13	Peak	Horizontal	Pass

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test plot for Vertical

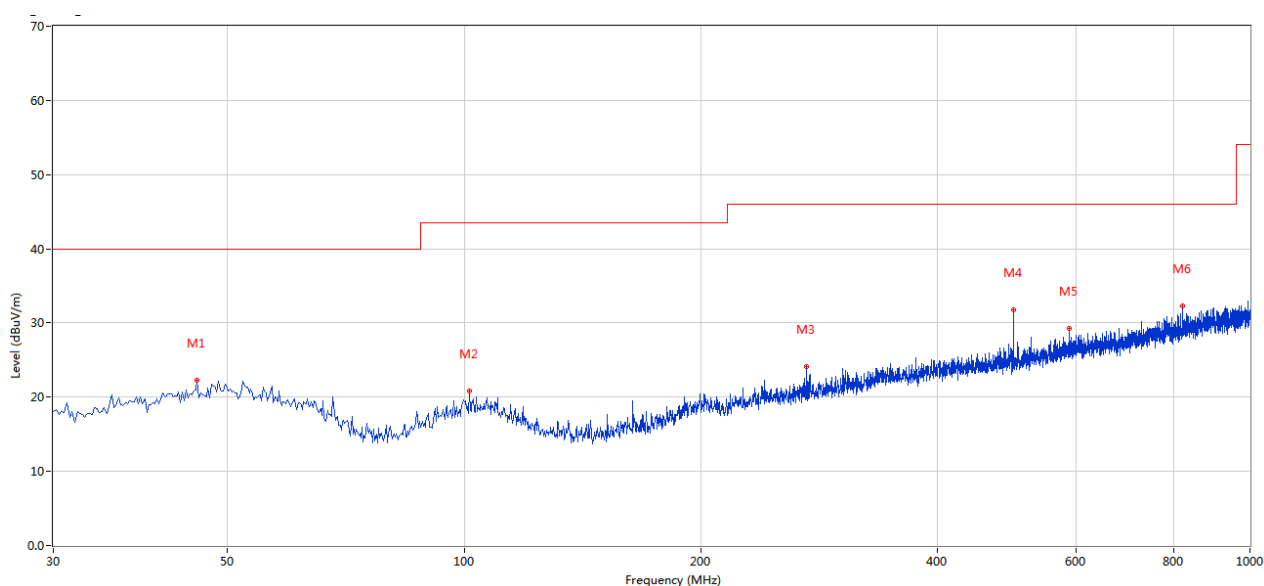

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	45.759	22.31	-11.40	40.0	17.69	Peak	Vertical	Pass
2	101.520	20.83	-13.44	43.5	22.67	Peak	Vertical	Pass
3	272.924	24.08	-11.66	46.0	21.92	Peak	Vertical	Pass
4	499.848	31.79	-6.90	46.0	14.21	Peak	Vertical	Pass
5	589.308	29.29	-5.15	46.0	16.71	Peak	Vertical	Pass
6	820.110	32.30	-2.90	46.0	13.70	Peak	Vertical	Pass


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

BLE

Please refer to the following test plots for the worst test mode (GFSK, Lowest Channel).

Left earphone


Test plot for Horizontal

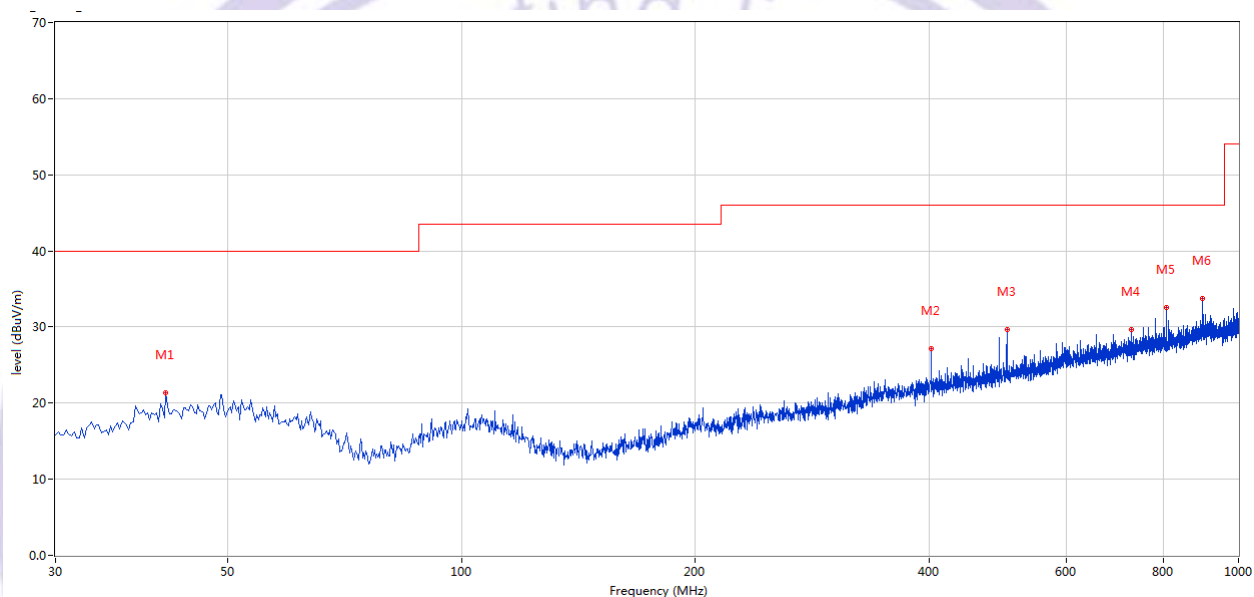

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	41.637	21.35	-11.82	40.0	18.65	Peak	Horizontal	Pass
2	401.902	27.17	-8.60	46.0	18.83	Peak	Horizontal	Pass
3	503.242	29.61	-6.99	46.0	16.39	Peak	Horizontal	Pass
4	728.468	29.68	-3.80	46.0	16.32	Peak	Horizontal	Pass
5	807.018	32.61	-3.12	46.0	13.39	Peak	Horizontal	Pass
6	899.873	33.80	-1.85	46.0	12.20	Peak	Horizontal	Pass

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test plot for Vertical

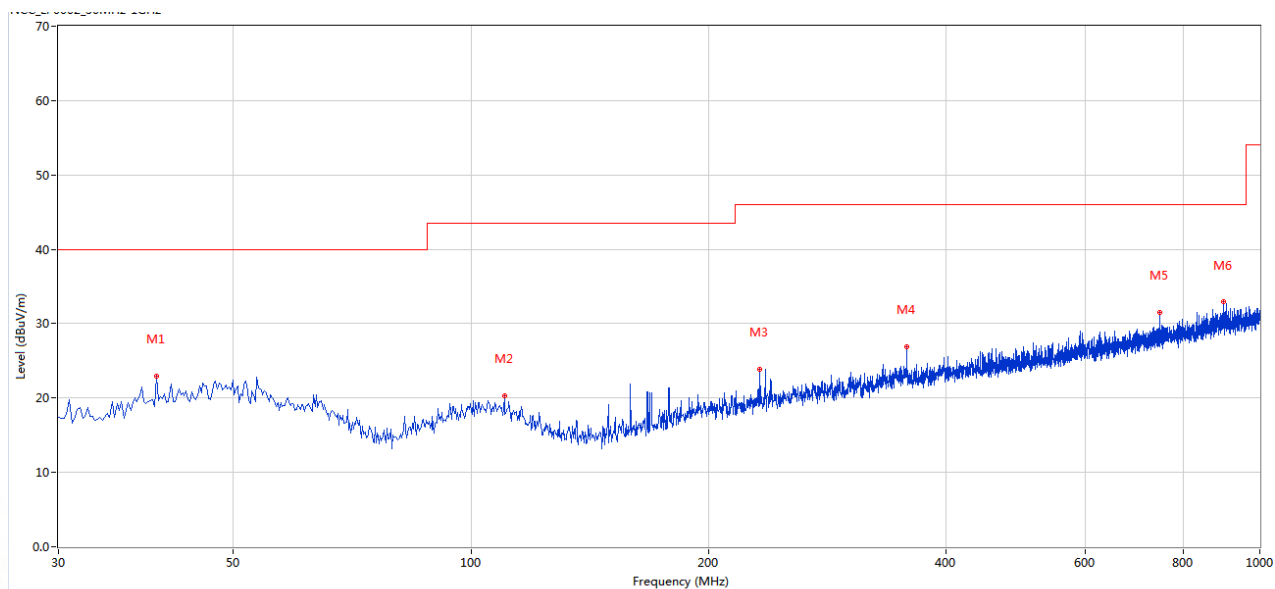


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	39.940	22.98	-12.43	40.0	17.02	Peak	Vertical	Pass
2	110.247	20.29	-13.62	43.5	23.21	Peak	Vertical	Pass
3	232.437	23.88	-12.53	46.0	22.12	Peak	Vertical	Pass
4	356.808	26.94	-9.50	46.0	19.06	Peak	Vertical	Pass
5	746.893	31.50	-3.39	46.0	14.50	Peak	Vertical	Pass
6	899.145	33.02	-1.81	46.0	12.98	Peak	Vertical	Pass

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Right earphone


Test plot for Horizontal

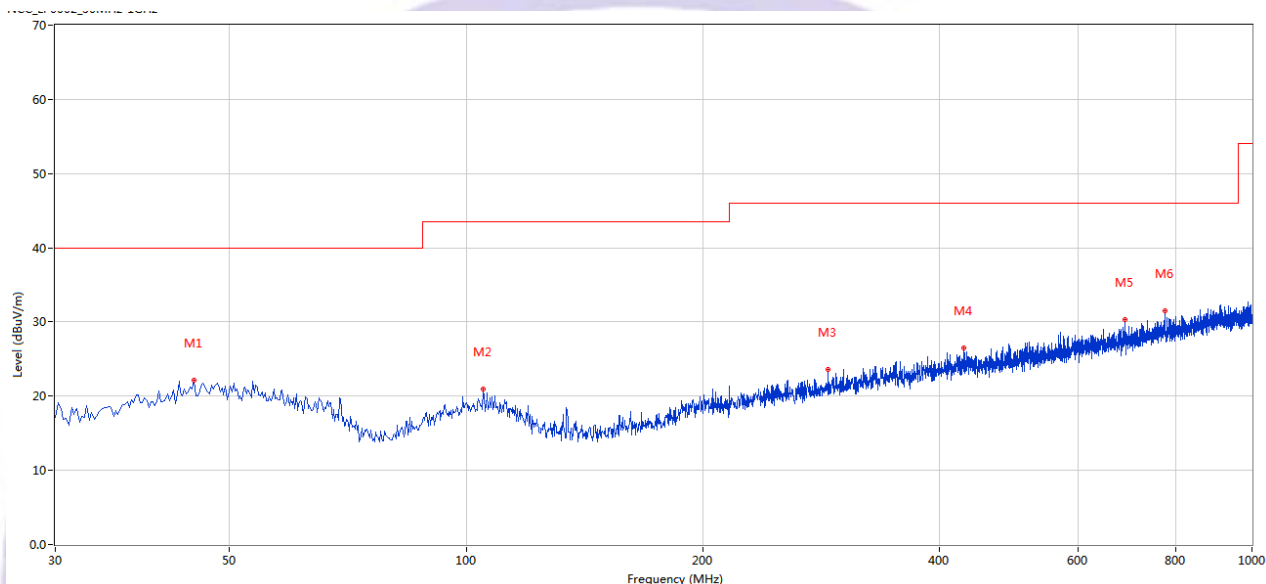

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	45.031	22.13	-11.41	40.0	17.87	Peak	Horizontal	Pass
2	105.156	20.95	-13.23	43.5	22.55	Peak	Horizontal	Pass
3	288.683	23.62	-11.25	46.0	22.38	Peak	Horizontal	Pass
4	429.783	26.54	-7.96	46.0	19.46	Peak	Horizontal	Pass
5	689.435	30.26	-4.20	46.0	15.74	Peak	Horizontal	Pass
6	774.531	31.56	-3.31	46.0	14.44	Peak	Horizontal	Pass

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test plot for Vertical

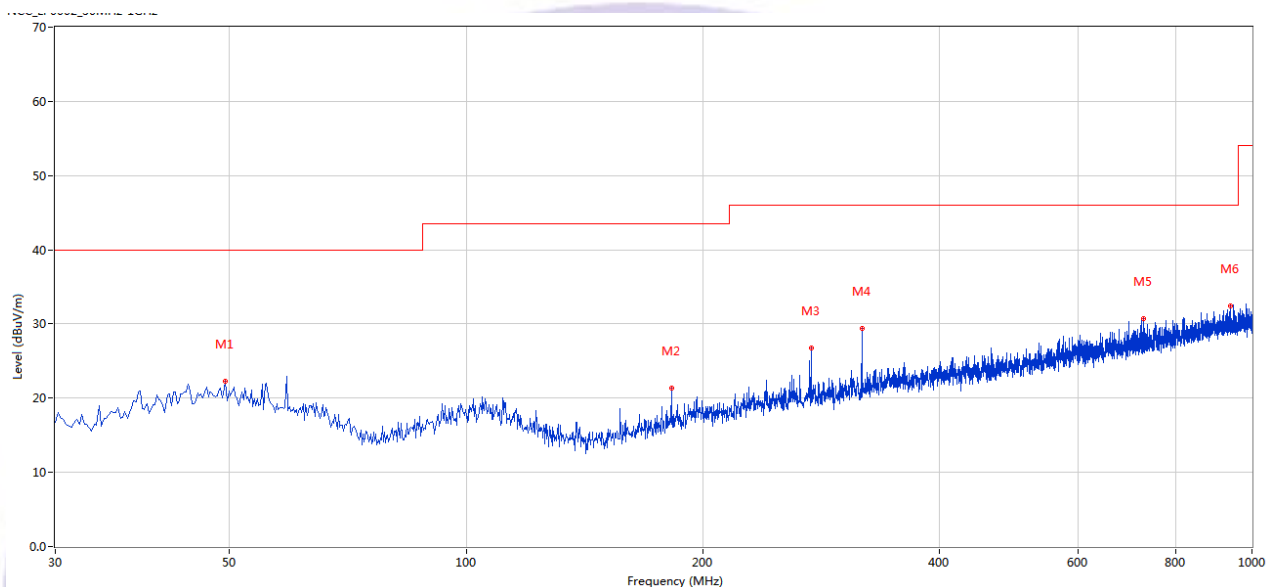

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	49.395	22.34	-11.28	40.0	17.66	Peak	Vertical	Pass
2	182.494	21.34	-14.98	43.5	22.16	Peak	Vertical	Pass
3	274.864	26.73	-11.65	46.0	19.27	Peak	Vertical	Pass
4	318.745	29.35	-10.66	46.0	16.65	Peak	Vertical	Pass
5	726.771	30.73	-3.65	46.0	15.27	Peak	Vertical	Pass
6	938.905	32.41	-1.73	46.0	13.59	Peak	Vertical	Pass

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Test Frequency 1GHz-25GHz

Left earphone

П/4-DQPSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	52.99	34.12	5.03	32.39	56.29	74.00	-17.71	Pk
V	4804.00	40.61	34.12	5.03	32.39	43.91	54.00	-10.09	AV
V	7206.00	46.98	32.54	6.29	35.86	56.59	74.00	-17.41	Pk
V	7206.00	37.23	32.54	6.29	35.86	46.84	54.00	-7.16	AV
V	9608.00	41.67	32.98	7.55	38.40	54.64	74.00	-19.36	Pk
V	9608.00	31.90	32.98	7.55	38.40	44.87	54.00	-9.13	AV
V	12010.00	41.69	32.09	8.93	39.00	57.53	74.00	-16.47	Pk
V	12010.00	26.37	32.09	8.93	39.00	42.21	54.00	-11.79	AV
H	4804.00	50.71	34.12	5.03	32.39	54.01	74.00	-19.99	Pk
H	4804.00	39.51	34.12	5.03	32.39	42.81	54.00	-11.19	AV
H	7206.00	47.16	32.54	6.29	35.86	56.77	74.00	-17.23	Pk
H	7206.00	34.23	32.54	6.29	35.86	43.84	54.00	-10.16	AV
H	9608.00	47.45	32.98	7.55	38.40	60.42	74.00	-13.58	Pk
H	9608.00	32.98	32.98	7.55	38.40	45.95	54.00	-8.05	AV
H	12010.00	37.83	32.09	8.93	39.00	53.67	74.00	-20.33	Pk
H	12010.00	29.72	32.09	8.93	39.00	45.56	54.00	-8.44	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2441MHz									
V	4882.00	52.49	34.07	5.09	32.59	56.1	74.00	-17.9	Pk
V	4882.00	38.22	34.07	5.09	32.59	41.83	54.00	-12.17	AV
V	7323.00	44.45	32.63	6.34	35.96	54.12	74.00	-19.88	Pk
V	7323.00	34.88	32.63	6.34	35.96	44.55	54.00	-9.45	AV
V	9764.00	42.38	32.92	7.59	38.40	55.45	74.00	-18.55	Pk
V	9764.00	29.58	32.92	7.59	38.40	42.65	54.00	-11.35	AV
V	12205.00	41.52	31.96	8.88	39.04	57.48	74.00	-16.52	Pk
V	12205.00	28.63	31.96	8.88	39.04	44.59	54.00	-9.41	AV
H	4882.00	50.78	34.07	5.09	32.59	54.39	74.00	-19.61	Pk
H	4882.00	38.04	34.07	5.09	32.59	41.65	54.00	-12.35	AV
H	7323.00	47.05	32.63	6.34	35.96	56.72	74.00	-17.28	Pk
H	7323.00	33.31	32.63	6.34	35.96	42.98	54.00	-11.02	AV
H	9764.00	42.75	32.92	7.59	38.40	55.82	74.00	-18.18	Pk
H	9764.00	28.57	32.92	7.59	38.40	41.64	54.00	-12.36	AV
H	12205.00	41.20	31.96	8.88	39.04	57.16	74.00	-16.84	Pk
H	12205.00	28.28	31.96	8.88	39.04	44.24	54.00	-9.76	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	52.08	34.02	5.15	32.8	56.01	74.00	-17.99	Pk
V	4960.00	40.14	34.02	5.15	32.8	44.07	54.00	-9.93	AV
V	7440.00	46.75	32.71	6.4	36.05	56.49	74.00	-17.51	Pk
V	7440.00	33.11	32.71	6.4	36.05	42.85	54.00	-11.15	AV
V	9920.00	41.17	32.86	7.62	38.4	54.33	74.00	-19.67	Pk
V	9920.00	31.65	32.86	7.62	38.4	44.81	54.00	-9.19	AV
V	12400.00	42.62	31.82	8.84	39.08	58.72	74.00	-15.28	Pk
V	12400.00	29.70	31.82	8.84	39.08	45.8	54.00	-8.2	AV
H	4960.00	49.37	34.02	5.15	32.8	53.3	74.00	-20.7	Pk
H	4960.00	39.51	34.02	5.15	32.8	43.44	54.00	-10.56	AV
H	7440.00	45.55	32.71	6.4	36.05	55.29	74.00	-18.71	Pk
H	7440.00	34.95	32.71	6.4	36.05	44.69	54.00	-9.31	AV
H	9920.00	44.89	32.86	7.62	38.4	58.05	74.00	-15.95	Pk
H	9920.00	31.95	32.86	7.62	38.4	45.11	54.00	-8.89	AV
H	12400.00	42.14	31.82	8.84	39.08	58.24	74.00	-15.76	Pk
H	12400.00	27.77	31.82	8.84	39.08	43.87	54.00	-10.13	AV

Note: 1. The testing has been conformed to $10 \times 2480\text{MHz} = 24800\text{MHz}$.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

4. All the modes have tested and recorded the worst mode($\pi/4$ -DQPSK) in the report

Right earphone

 $\pi/4$ -DQPSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	52.84	34.12	5.03	32.39	56.14	74.00	-17.86	Pk
V	4804.00	40.76	34.12	5.03	32.39	44.06	54.00	-9.94	AV
V	7206.00	46.57	32.54	6.29	35.86	56.18	74.00	-17.82	Pk
V	7206.00	36.63	32.54	6.29	35.86	46.24	54.00	-7.76	AV
V	9608.00	42.01	32.98	7.55	38.40	54.98	74.00	-19.02	Pk
V	9608.00	31.23	32.98	7.55	38.40	44.2	54.00	-9.8	AV
V	12010.00	42.03	32.09	8.93	39.00	57.87	74.00	-16.13	Pk
V	12010.00	26.11	32.09	8.93	39.00	41.95	54.00	-12.05	AV
H	4804.00	51.77	34.12	5.03	32.39	55.07	74.00	-18.93	Pk
H	4804.00	37.54	34.12	5.03	32.39	40.84	54.00	-13.16	AV
H	7206.00	46.99	32.54	6.29	35.86	56.6	74.00	-17.4	Pk
H	7206.00	33.87	32.54	6.29	35.86	43.48	54.00	-10.52	AV
H	9608.00	45.87	32.98	7.55	38.40	58.84	74.00	-15.16	Pk
H	9608.00	31.02	32.98	7.55	38.40	43.99	54.00	-10.01	AV
H	12010.00	36.52	32.09	8.93	39.00	52.36	74.00	-21.64	Pk
H	12010.00	27.52	32.09	8.93	39.00	43.36	54.00	-10.64	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	50.47	34.07	5.09	32.59	54.08	74.00	-19.92	Pk
V	4882.00	38.85	34.07	5.09	32.59	42.46	54.00	-11.54	AV
V	7323.00	44.57	32.63	6.34	35.96	54.24	74.00	-19.76	Pk
V	7323.00	34.88	32.63	6.34	35.96	44.55	54.00	-9.45	AV
V	9764.00	41.74	32.92	7.59	38.40	54.81	74.00	-19.19	Pk
V	9764.00	29.23	32.92	7.59	38.40	42.3	54.00	-11.7	AV
V	12205.00	40.51	31.96	8.88	39.04	56.47	74.00	-17.53	Pk
V	12205.00	27.42	31.96	8.88	39.04	43.38	54.00	-10.62	AV
H	4882.00	50.11	34.07	5.09	32.59	53.72	74.00	-20.28	Pk
H	4882.00	37.98	34.07	5.09	32.59	41.59	54.00	-12.41	AV
H	7323.00	46.74	32.63	6.34	35.96	56.41	74.00	-17.59	Pk
H	7323.00	32.55	32.63	6.34	35.96	42.22	54.00	-11.78	AV
H	9764.00	42.74	32.92	7.59	38.40	55.81	74.00	-18.19	Pk
H	9764.00	27.96	32.92	7.59	38.40	41.03	54.00	-12.97	AV
H	12205.00	40.41	31.96	8.88	39.04	56.37	74.00	-17.63	Pk
H	12205.00	27.88	31.96	8.88	39.04	43.84	54.00	-10.16	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	51.22	34.02	5.15	32.8	55.15	74.00	-18.85	Pk
V	4960.00	39.31	34.02	5.15	32.8	43.24	54.00	-10.76	AV
V	7440.00	46.47	32.71	6.4	36.05	56.21	74.00	-17.79	Pk
V	7440.00	32.66	32.71	6.4	36.05	42.4	54.00	-11.6	AV
V	9920.00	41.52	32.86	7.62	38.4	54.68	74.00	-19.32	Pk
V	9920.00	31.53	32.86	7.62	38.4	44.69	54.00	-9.31	AV
V	12400.00	42.74	31.82	8.84	39.08	58.84	74.00	-15.16	Pk
V	12400.00	27.12	31.82	8.84	39.08	43.22	54.00	-10.78	AV
H	4960.00	50.36	34.02	5.15	32.8	54.29	74.00	-19.71	Pk
H	4960.00	37.45	34.02	5.15	32.8	41.38	54.00	-12.62	AV
H	7440.00	45.11	32.71	6.4	36.05	54.85	74.00	-19.15	Pk
H	7440.00	35.12	32.71	6.4	36.05	44.86	54.00	-9.14	AV
H	9920.00	45.66	32.86	7.62	38.4	58.82	74.00	-15.18	Pk
H	9920.00	30.12	32.86	7.62	38.4	43.28	54.00	-10.72	AV
H	12400.00	41.75	31.82	8.84	39.08	57.85	74.00	-16.15	Pk
H	12400.00	27.02	31.82	8.84	39.08	43.12	54.00	-10.88	AV

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

4. All the modes have tested and recorded the worst mode(Π/4-DQPSK) in the report

BLE

Left earphone

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	52.12	34.12	5.03	32.39	55.42	74.00	-18.58	Pk
V	4804.00	40.23	34.12	5.03	32.39	43.53	54.00	-10.47	AV
V	7206.00	47.05	32.54	6.29	35.86	56.66	74.00	-17.34	Pk
V	7206.00	35.52	32.54	6.29	35.86	45.13	54.00	-8.87	AV
V	9608.00	47.21	32.98	7.55	38.40	60.18	74.00	-13.82	Pk
V	9608.00	32.23	32.98	7.55	38.40	45.2	54.00	-8.8	AV
V	12010.00	41.17	32.09	8.93	39.00	57.01	74.00	-16.99	Pk
V	12010.00	30.02	32.09	8.93	39.00	45.86	54.00	-8.14	AV
H	4804.00	50.55	34.12	5.03	32.39	53.85	74.00	-20.15	Pk
H	4804.00	37.13	34.12	5.03	32.39	40.43	54.00	-13.57	AV
H	7206.00	45.78	32.54	6.29	35.86	55.39	74.00	-18.61	Pk
H	7206.00	36.35	32.54	6.29	35.86	45.96	54.00	-8.04	AV
H	9608.00	46.12	32.98	7.55	38.40	59.09	74.00	-14.91	Pk
H	9608.00	32.01	32.98	7.55	38.40	44.98	54.00	-9.02	AV
H	12010.00	40.57	32.09	8.93	39.00	56.41	74.00	-17.59	Pk
H	12010.00	30.04	32.09	8.93	39.00	45.88	54.00	-8.12	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2440MHz									
V	4880.00	50.12	34.07	5.09	32.59	53.73	74.00	-20.27	Pk
V	4880.00	39.41	34.07	5.09	32.59	43.02	54.00	-10.98	AV
V	7320.00	44.77	32.63	6.34	35.96	54.44	74.00	-19.56	Pk
V	7320.00	34.23	32.63	6.34	35.96	43.9	54.00	-10.1	AV
V	9760.00	41.74	32.92	7.59	38.40	54.81	74.00	-19.19	Pk
V	9760.00	30.12	32.92	7.59	38.40	43.19	54.00	-10.81	AV
V	12200.00	39.23	31.96	8.88	39.04	55.19	74.00	-18.81	Pk
V	12200.00	29.47	31.96	8.88	39.04	45.43	54.00	-8.57	AV
H	4880.00	50.17	34.07	5.09	32.59	53.78	74.00	-20.22	Pk
H	4880.00	39.12	34.07	5.09	32.59	42.73	54.00	-11.27	AV
H	7320.00	45.52	32.63	6.34	35.96	55.19	74.00	-18.81	Pk
H	7320.00	32.99	32.63	6.34	35.96	42.66	54.00	-11.34	AV
H	9760.00	41.12	32.92	7.59	38.40	54.19	74.00	-19.81	Pk
H	9760.00	29.02	32.92	7.59	38.40	42.09	54.00	-11.91	AV
H	12200.00	40.53	31.96	8.88	39.04	56.49	74.00	-17.51	Pk
H	12200.00	28.43	31.96	8.88	39.04	44.39	54.00	-9.61	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	46.96	34.02	5.15	32.80	50.89	74.00	-23.11	Pk
V	4960.00	36.75	34.02	5.15	32.80	40.68	54.00	-13.32	AV
V	7440.00	45.88	32.71	6.40	36.05	55.62	74.00	-18.38	Pk
V	7440.00	34.05	32.71	6.40	36.05	43.79	54.00	-10.21	AV
V	9920.00	41.28	32.86	7.62	38.40	54.44	74.00	-19.56	Pk
V	9920.00	27.52	32.86	7.62	38.40	40.68	54.00	-13.32	AV
V	12400.00	38.47	31.82	8.84	39.08	54.57	74.00	-19.43	Pk
V	12400.00	27.33	31.82	8.84	39.08	43.43	54.00	-10.57	AV
H	4960.00	48.85	34.02	5.15	32.80	52.78	74.00	-21.22	Pk
H	4960.00	37.12	34.02	5.15	32.80	41.05	54.00	-12.95	AV
H	7440.00	45.89	32.71	6.40	36.05	55.63	74.00	-18.37	Pk
H	7440.00	31.01	32.71	6.40	36.05	40.75	54.00	-13.25	AV
H	9920.00	38.17	32.86	7.62	38.40	51.33	74.00	-22.67	Pk
H	9920.00	27.22	32.86	7.62	38.40	40.38	54.00	-13.62	AV
H	12400.00	39.74	31.82	8.84	39.08	55.84	74.00	-18.16	Pk
H	12400.00	27.12	31.82	8.84	39.08	43.22	54.00	-10.78	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Right earphone

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	52.23	34.12	5.03	32.39	55.53	74.00	-18.47	Pk
V	4804.00	41.75	34.12	5.03	32.39	45.05	54.00	-8.95	AV
V	7206.00	47.32	32.54	6.29	35.86	56.93	74.00	-17.07	Pk
V	7206.00	35.34	32.54	6.29	35.86	44.95	54.00	-9.05	AV
V	9608.00	47.58	32.98	7.55	38.40	60.55	74.00	-13.45	Pk
V	9608.00	33.95	32.98	7.55	38.40	46.92	54.00	-7.08	AV
V	12010.00	42.41	32.09	8.93	39.00	58.25	74.00	-15.75	Pk
V	12010.00	32.12	32.09	8.93	39.00	47.96	54.00	-6.04	AV
H	4804.00	50.66	34.12	5.03	32.39	53.96	74.00	-20.04	Pk
H	4804.00	37.45	34.12	5.03	32.39	40.75	54.00	-13.25	AV
H	7206.00	45.32	32.54	6.29	35.86	54.93	74.00	-19.07	Pk
H	7206.00	36.47	32.54	6.29	35.86	46.08	54.00	-7.92	AV
H	9608.00	47.87	32.98	7.55	38.40	60.84	74.00	-13.16	Pk
H	9608.00	32.11	32.98	7.55	38.40	45.08	54.00	-8.92	AV
H	12010.00	40.87	32.09	8.93	39.00	56.71	74.00	-17.29	Pk
H	12010.00	32.02	32.09	8.93	39.00	47.86	54.00	-6.14	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2440MHz									
V	4880.00	50.12	34.07	5.09	32.59	53.73	74.00	-20.27	Pk
V	4880.00	39.41	34.07	5.09	32.59	43.02	54.00	-10.98	AV
V	7320.00	44.52	32.63	6.34	35.96	54.19	74.00	-19.81	Pk
V	7320.00	34.63	32.63	6.34	35.96	44.3	54.00	-9.7	AV
V	9760.00	40.12	32.92	7.59	38.40	53.19	74.00	-20.81	Pk
V	9760.00	30.02	32.92	7.59	38.40	43.09	54.00	-10.91	AV
V	12200.00	37.54	31.96	8.88	39.04	53.5	74.00	-20.5	Pk
V	12200.00	27.56	31.96	8.88	39.04	43.52	54.00	-10.48	AV
H	4880.00	50.11	34.07	5.09	32.59	53.72	74.00	-20.28	Pk
H	4880.00	39.12	34.07	5.09	32.59	42.73	54.00	-11.27	AV
H	7320.00	45.01	32.63	6.34	35.96	54.68	74.00	-19.32	Pk
H	7320.00	31.23	32.63	6.34	35.96	40.9	54.00	-13.1	AV
H	9760.00	40.56	32.92	7.59	38.40	53.63	74.00	-20.37	Pk
H	9760.00	28.47	32.92	7.59	38.40	41.54	54.00	-12.46	AV
H	12200.00	39.57	31.96	8.88	39.04	55.53	74.00	-18.47	Pk
H	12200.00	29.66	31.96	8.88	39.04	45.62	54.00	-8.38	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	47.64	34.02	5.15	32.80	51.57	74.00	-22.43	Pk
V	4960.00	36.80	34.02	5.15	32.80	40.73	54.00	-13.27	AV
V	7440.00	46.34	32.71	6.40	36.05	56.08	74.00	-17.92	Pk
V	7440.00	35.16	32.71	6.40	36.05	44.9	54.00	-9.1	AV
V	9920.00	41.71	32.86	7.62	38.40	54.87	74.00	-19.13	Pk
V	9920.00	27.93	32.86	7.62	38.40	41.09	54.00	-12.91	AV
V	12400.00	38.70	31.82	8.84	39.08	54.8	74.00	-19.2	Pk
V	12400.00	28.19	31.82	8.84	39.08	44.29	54.00	-9.71	AV
H	4960.00	48.72	34.02	5.15	32.80	52.65	74.00	-21.35	Pk
H	4960.00	37.40	34.02	5.15	32.80	41.33	54.00	-12.67	AV
H	7440.00	45.87	32.71	6.40	36.05	55.61	74.00	-18.39	Pk
H	7440.00	32.33	32.71	6.40	36.05	42.07	54.00	-11.93	AV
H	9920.00	38.50	32.86	7.62	38.40	51.66	74.00	-22.34	Pk
H	9920.00	28.11	32.86	7.62	38.40	41.27	54.00	-12.73	AV
H	12400.00	40.34	31.82	8.84	39.08	56.44	74.00	-17.56	Pk
H	12400.00	27.66	31.82	8.84	39.08	43.76	54.00	-10.24	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

BT
Left earphone

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2310.00	55.16	35.17	3.48	27.49	50.96	74.00	PK	PASS
	H	2310.00	46.29	35.17	3.48	27.49	42.09	54.00	AV	PASS
	H	2390.00	59.54	35.17	3.48	27.49	55.34	74.00	PK	PASS
	H	2390.00	52.13	35.17	3.48	27.49	47.93	54.00	AV	PASS
	H	2400.00	62.07	35.16	3.49	27.52	57.92	74.00	PK	PASS
	H	2400.00	51.62	35.16	3.49	27.52	47.47	54.00	AV	PASS
	V	2310.00	54.59	35.17	3.48	27.49	50.39	74.00	PK	PASS
	V	2310.00	45.88	35.17	3.48	27.49	41.68	54.00	AV	PASS
	V	2390.00	59.53	35.17	3.48	27.49	55.33	74.00	PK	PASS
	V	2390.00	52.75	35.17	3.48	27.49	48.55	54.00	AV	PASS
	V	2400.00	61.12	35.16	3.49	27.52	56.97	74.00	PK	PASS
	V	2400.00	51.85	35.16	3.49	27.52	47.7	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	59.02	35.11	3.56	27.75	55.22	74.00	PK	PASS
	H	2483.50	52.11	35.11	3.56	27.75	48.31	54.00	AV	PASS
	H	2500.00	60.08	35.10	3.57	27.80	56.35	74.00	PK	PASS
	H	2500.00	49.86	35.10	3.57	27.80	46.13	54.00	AV	PASS
	V	2483.50	58.28	35.11	3.56	27.75	54.48	74.00	PK	PASS
	V	2483.50	49.31	35.11	3.56	27.75	45.51	54.00	AV	PASS
	V	2500.00	59.07	35.10	3.57	27.80	55.34	74.00	PK	PASS

	V	2500.00	50.27	35.10	3.57	27.80	46.54	54.00	AV	PASS
π/4-DQPSK	Low Channel: 2402MHz									
	H	2310.00	54.89	35.17	3.48	27.49	50.69	74.00	PK	PASS
	H	2310.00	45.71	35.17	3.48	27.49	41.51	54.00	AV	PASS
	H	2390.00	60.02	35.17	3.48	27.49	55.82	74.00	PK	PASS
	H	2390.00	51.12	35.17	3.48	27.49	46.92	54.00	AV	PASS
	H	2400.00	60.57	35.16	3.49	27.52	56.42	74.00	PK	PASS
	H	2400.00	51.23	35.16	3.49	27.52	47.08	54.00	AV	PASS
	V	2310.00	54.13	35.17	3.48	27.49	49.93	74.00	PK	PASS
	V	2310.00	44.58	35.17	3.48	27.49	40.38	54.00	AV	PASS
	V	2390.00	59.05	35.17	3.48	27.49	54.85	74.00	PK	PASS
	V	2390.00	50.16	35.17	3.48	27.49	45.96	54.00	AV	PASS
	V	2400.00	60.07	35.16	3.49	27.52	55.92	74.00	PK	PASS
	V	2400.00	49.42	35.16	3.49	27.52	45.27	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	59.13	35.11	3.56	27.75	55.33	74.00	PK	PASS
	H	2483.50	50.54	35.11	3.56	27.75	46.74	54.00	AV	PASS
	H	2500.00	60.77	35.10	3.57	27.80	57.04	74.00	PK	PASS
	H	2500.00	50.56	35.10	3.57	27.80	46.83	54.00	AV	PASS
	V	2483.50	60.21	35.11	3.56	27.75	56.41	74.00	PK	PASS
	V	2483.50	50.85	35.11	3.56	27.75	47.05	54.00	AV	PASS
	V	2500.00	59.74	35.10	3.57	27.80	56.01	74.00	PK	PASS
	V	2500.00	50.12	35.10	3.57	27.80	46.39	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

Right earphone

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
GFSK	Low Channel: 2402MHz									
	H	2310.00	52.16	35.17	3.48	27.49	47.96	74.00	PK	PASS
	H	2310.00	45.66	35.17	3.48	27.49	41.46	54.00	AV	PASS
	H	2390.00	59.42	35.17	3.48	27.49	55.22	74.00	PK	PASS
	H	2390.00	52.01	35.17	3.48	27.49	47.81	54.00	AV	PASS
	H	2400.00	61.54	35.16	3.49	27.52	57.39	74.00	PK	PASS
	H	2400.00	51.21	35.16	3.49	27.52	47.06	54.00	AV	PASS
	V	2310.00	51.89	35.17	3.48	27.49	47.69	74.00	PK	PASS
	V	2310.00	44.79	35.17	3.48	27.49	40.59	54.00	AV	PASS
	V	2390.00	59.07	35.17	3.48	27.49	54.87	74.00	PK	PASS
	V	2390.00	52.17	35.17	3.48	27.49	47.97	54.00	AV	PASS
	V	2400.00	61.03	35.16	3.49	27.52	56.88	74.00	PK	PASS
	V	2400.00	51.74	35.16	3.49	27.52	47.59	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	58.77	35.11	3.56	27.75	54.97	74.00	PK	PASS
	H	2483.50	51.95	35.11	3.56	27.75	48.15	54.00	AV	PASS
	H	2500.00	59.63	35.10	3.57	27.80	55.9	74.00	PK	PASS
	H	2500.00	49.84	35.10	3.57	27.80	46.11	54.00	AV	PASS
	V	2483.50	58.21	35.11	3.56	27.75	54.41	74.00	PK	PASS
	V	2483.50	49.35	35.11	3.56	27.75	45.55	54.00	AV	PASS
	V	2500.00	58.71	35.10	3.57	27.80	54.98	74.00	PK	PASS
	V	2500.00	50.12	35.10	3.57	27.80	46.39	54.00	AV	PASS
π/4-DQPSK	Low Channel: 2402MHz									
	H	2310.00	53.18	35.17	3.48	27.49	48.98	74.00	PK	PASS

H	2310.00	46.38	35.17	3.48	27.49	42.18	54.00	AV	PASS
H	2390.00	59.86	35.17	3.48	27.49	55.66	74.00	PK	PASS
H	2390.00	51.02	35.17	3.48	27.49	46.82	54.00	AV	PASS
H	2400.00	60.47	35.16	3.49	27.52	56.32	74.00	PK	PASS
H	2400.00	51.16	35.16	3.49	27.52	47.01	54.00	AV	PASS
V	2310.00	52.16	35.17	3.48	27.49	47.96	74.00	PK	PASS
V	2310.00	45.74	35.17	3.48	27.49	41.54	54.00	AV	PASS
V	2390.00	58.88	35.17	3.48	27.49	54.68	74.00	PK	PASS
V	2390.00	50.75	35.17	3.48	27.49	46.55	54.00	AV	PASS
V	2400.00	60.59	35.16	3.49	27.52	56.44	74.00	PK	PASS
V	2400.00	49.25	35.16	3.49	27.52	45.1	54.00	AV	PASS
High Channel: 2480MHz									
H	2483.50	59.02	35.11	3.56	27.75	55.22	74.00	PK	PASS
H	2483.50	50.75	35.11	3.56	27.75	46.95	54.00	AV	PASS
H	2500.00	60.85	35.10	3.57	27.80	57.12	74.00	PK	PASS
H	2500.00	50.99	35.10	3.57	27.80	47.26	54.00	AV	PASS
V	2483.50	60.23	35.11	3.56	27.75	56.43	74.00	PK	PASS
V	2483.50	50.75	35.11	3.56	27.75	46.95	54.00	AV	PASS
V	2500.00	59.63	35.10	3.57	27.80	55.9	74.00	PK	PASS
V	2500.00	50.23	35.10	3.57	27.80	46.5	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

BLE Left earphone

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2310.00	53.06	35.17	3.48	27.49	48.86	74.00	PK	PASS
	H	2310.00	46.21	35.17	3.48	27.49	42.01	54.00	AV	PASS
	H	2390.00	58.35	35.17	3.48	27.49	54.15	74.00	PK	PASS
	H	2390.00	50.02	35.17	3.48	27.49	45.82	54.00	AV	PASS
	H	2400.00	60.07	35.16	3.49	27.52	55.92	74.00	PK	PASS
	H	2400.00	50.11	35.16	3.49	27.52	45.96	54.00	AV	PASS
	V	2310.00	52.77	35.17	3.48	27.49	48.57	74.00	PK	PASS
	V	2310.00	46.03	35.17	3.48	27.49	41.83	54.00	AV	PASS
	V	2390.00	58.27	35.17	3.48	27.49	54.07	74.00	PK	PASS
	V	2390.00	50.09	35.17	3.48	27.49	45.89	54.00	AV	PASS
	V	2400.00	60.05	35.16	3.49	27.52	55.9	74.00	PK	PASS
	V	2400.00	49.88	35.16	3.49	27.52	45.73	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	57.23	35.11	3.56	27.75	53.43	74.00	PK	PASS
	H	2483.50	48.25	35.11	3.56	27.75	44.45	54.00	AV	PASS
	H	2500.00	59.07	35.10	3.57	27.80	55.34	74.00	PK	PASS
	H	2500.00	48.16	35.10	3.57	27.80	44.43	54.00	AV	PASS
	V	2483.50	58.56	35.11	3.56	27.75	54.76	74.00	PK	PASS
	V	2483.50	50.77	35.11	3.56	27.75	46.97	54.00	AV	PASS
	V	2500.00	58.65	35.10	3.57	27.80	54.92	74.00	PK	PASS
	V	2500.00	50.19	35.10	3.57	27.80	46.46	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

Right earphone


	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2310.00	51.02	35.17	3.48	27.49	46.82	74.00	PK	PASS
	H	2310.00	44.78	35.17	3.48	27.49	40.58	54.00	AV	PASS
	H	2390.00	58.79	35.17	3.48	27.49	54.59	74.00	PK	PASS
	H	2390.00	50.35	35.17	3.48	27.49	46.15	54.00	AV	PASS
	H	2400.00	61.00	35.16	3.49	27.52	56.85	74.00	PK	PASS
	H	2400.00	51.06	35.16	3.49	27.52	46.91	54.00	AV	PASS
	V	2310.00	50.89	35.17	3.48	27.49	46.69	74.00	PK	PASS
	V	2310.00	44.15	35.17	3.48	27.49	39.95	54.00	AV	PASS
	V	2390.00	59.56	35.17	3.48	27.49	55.36	74.00	PK	PASS
	V	2390.00	50.91	35.17	3.48	27.49	46.71	54.00	AV	PASS
	V	2400.00	60.43	35.16	3.49	27.52	56.28	74.00	PK	PASS
	V	2400.00	51.35	35.16	3.49	27.52	47.2	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	57.98	35.11	3.56	27.75	54.18	74.00	PK	PASS
	H	2483.50	49.06	35.11	3.56	27.75	45.26	54.00	AV	PASS
	H	2500.00	60.11	35.10	3.57	27.80	56.38	74.00	PK	PASS
	H	2500.00	49.34	35.10	3.57	27.80	45.61	54.00	AV	PASS
	V	2483.50	59.36	35.11	3.56	27.75	55.56	74.00	PK	PASS
	V	2483.50	51.46	35.11	3.56	27.75	47.66	54.00	AV	PASS
	V	2500.00	59.99	35.10	3.57	27.80	56.26	74.00	PK	PASS
	V	2500.00	51.00	35.10	3.57	27.80	47.27	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

8 Maximum Peak Output Power Test(For FHSS)

8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1)
Test Limit	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

8.2 Test Setup



8.3 Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold


8.4 Test Data

Left earphone


Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	0.283	30.00	Pass
	Middle	-0.521		
	Highest	-1.829		
$\pi/4$ -DQPSK	Lowest	0.912	20.97	Pass
	Middle	0.140		
	Highest	-1.120		

Test plots


GFSK Low Channel

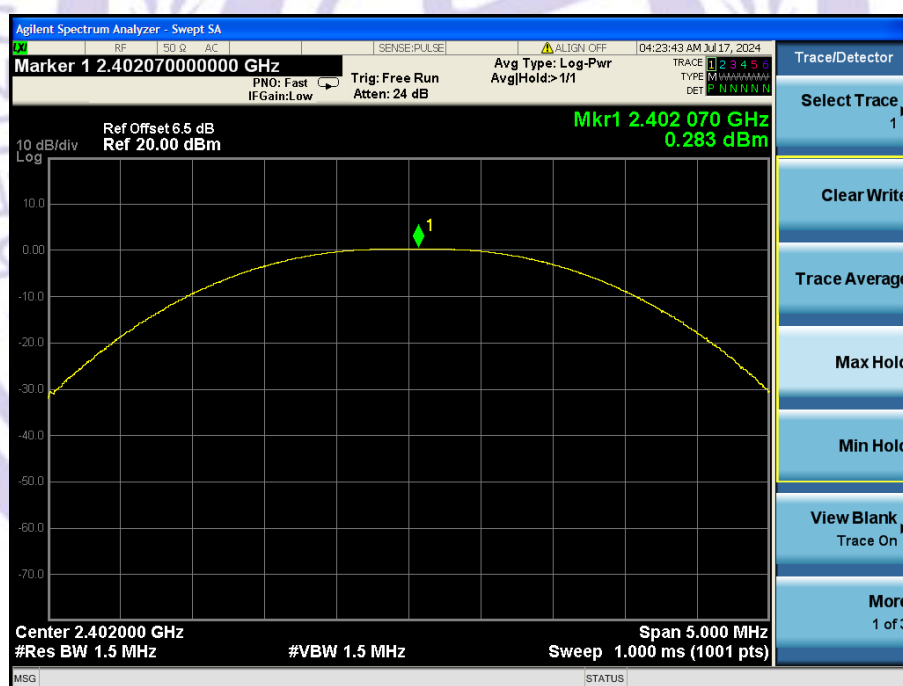


GFSK Middle Channel

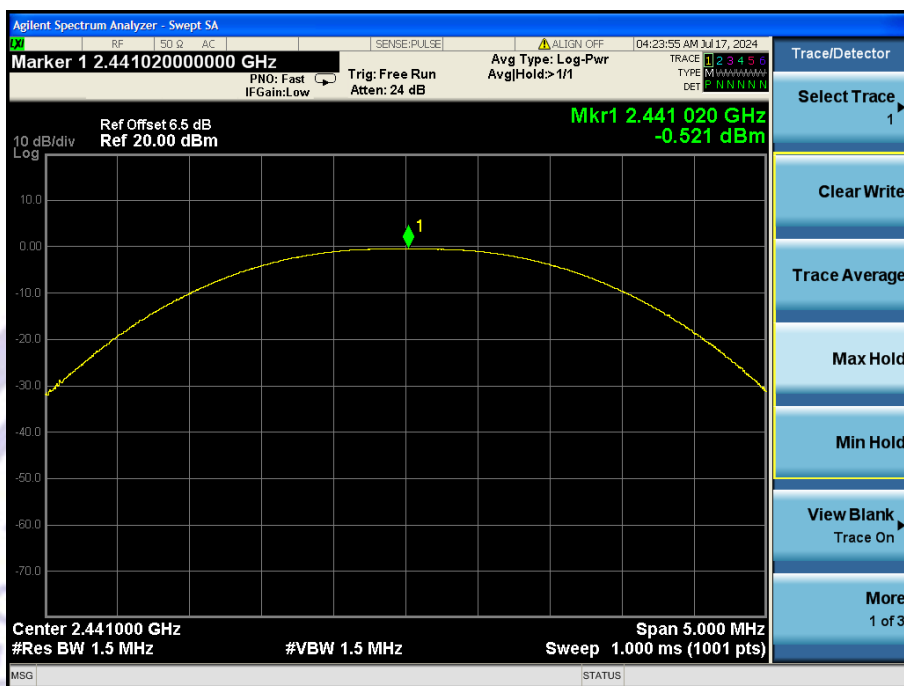


GFSK High Channel

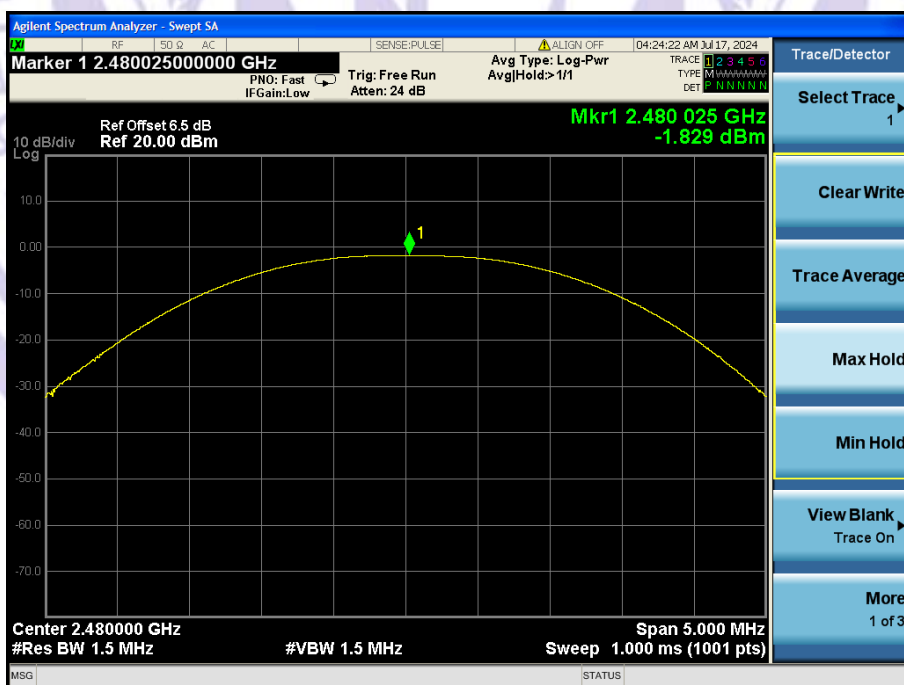


$\pi/4$ -DQPSK Low Channel

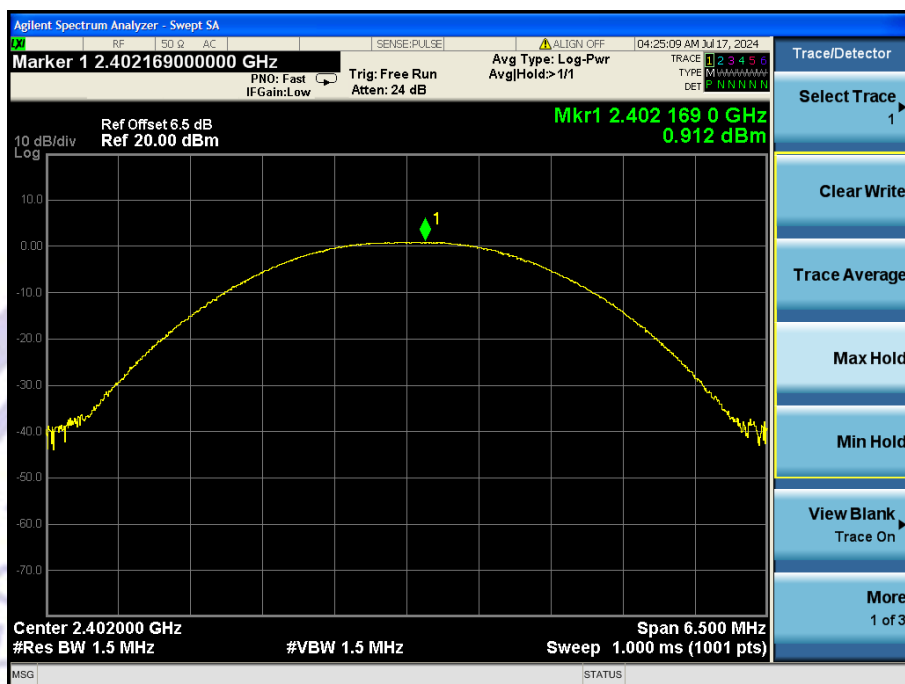

$\pi/4$ -DQPSK Middle Channel

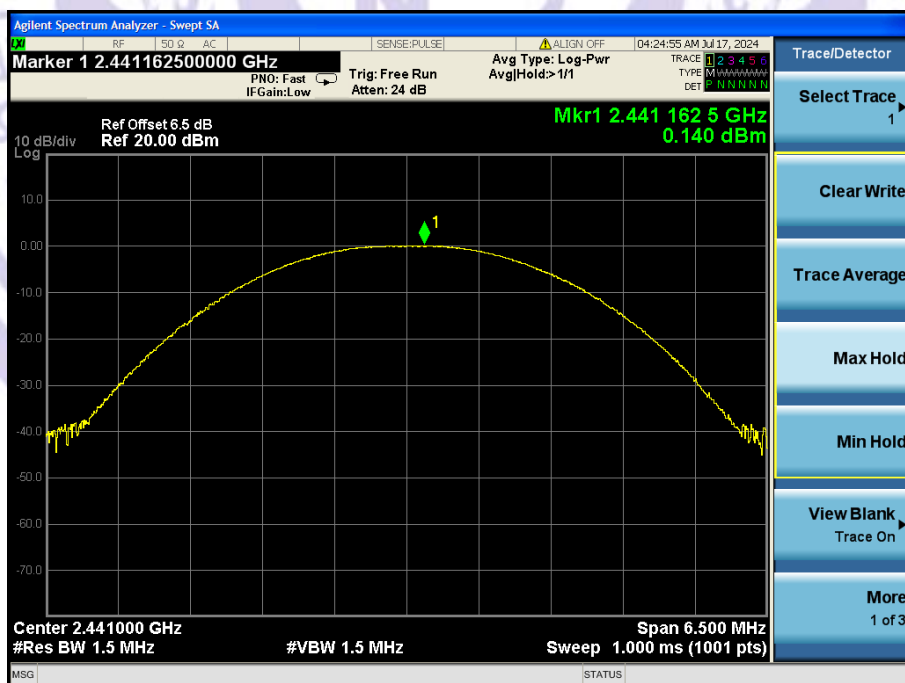

$\pi/4$ -DQPSK High Channel

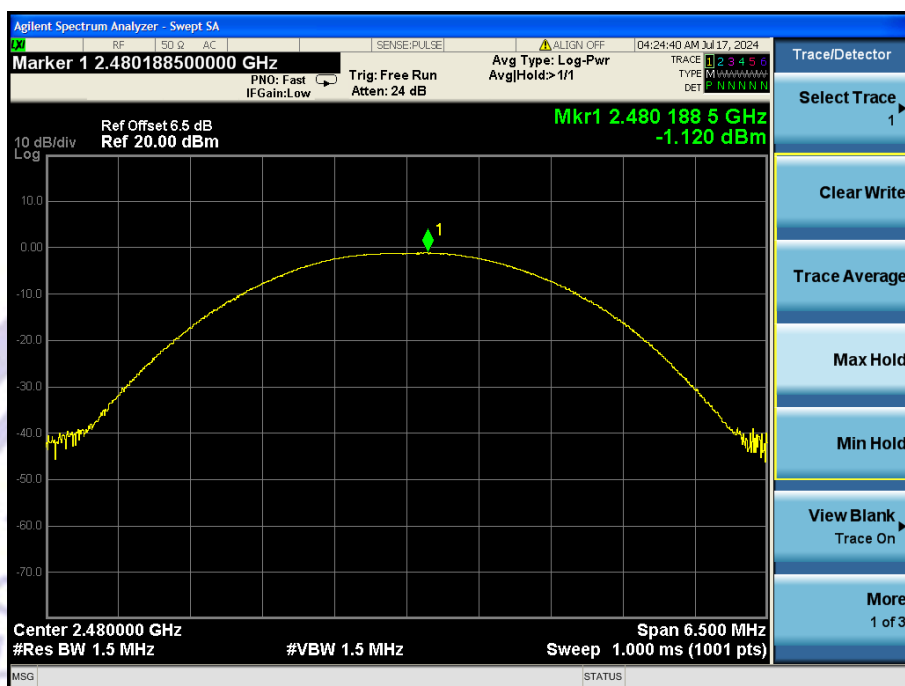


Right earphone


Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	0.324	30.00	Pass
	Middle	-0.482		
	Highest	-1.808		
$\pi/4$ -DQPSK	Lowest	0.902	20.97	Pass
	Middle	0.143		
	Highest	-1.144		

Test plots


GFSK Low Channel

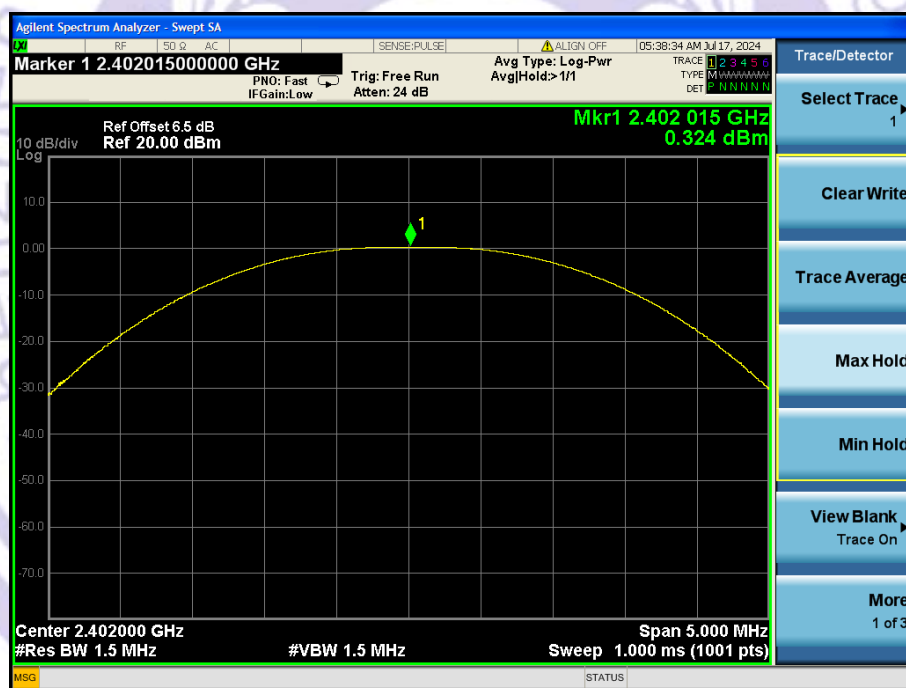


GFSK Middle Channel

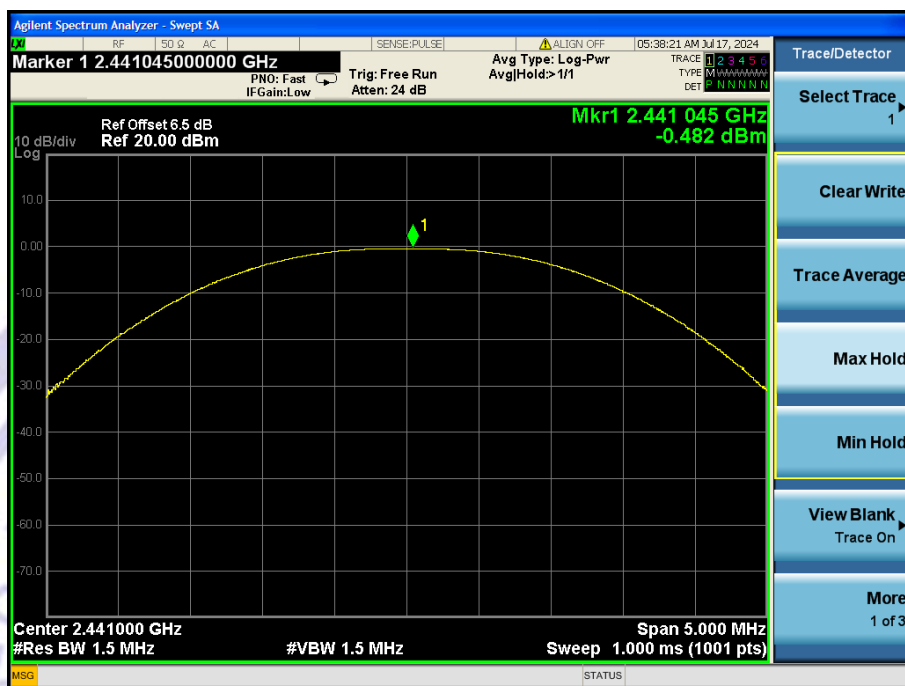


GFSK High Channel

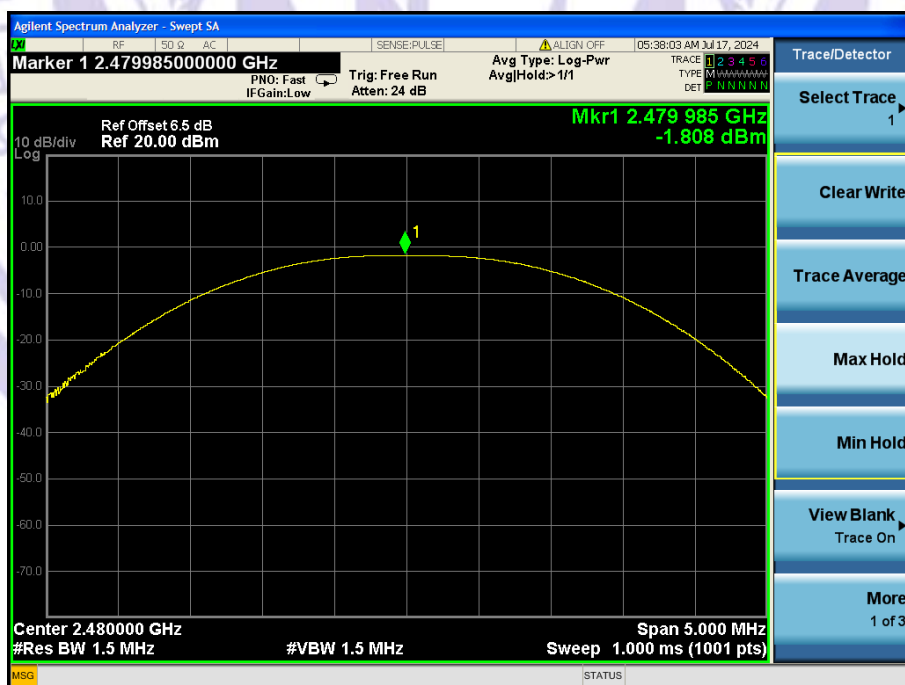


$\pi/4$ -DQPSK Low Channel

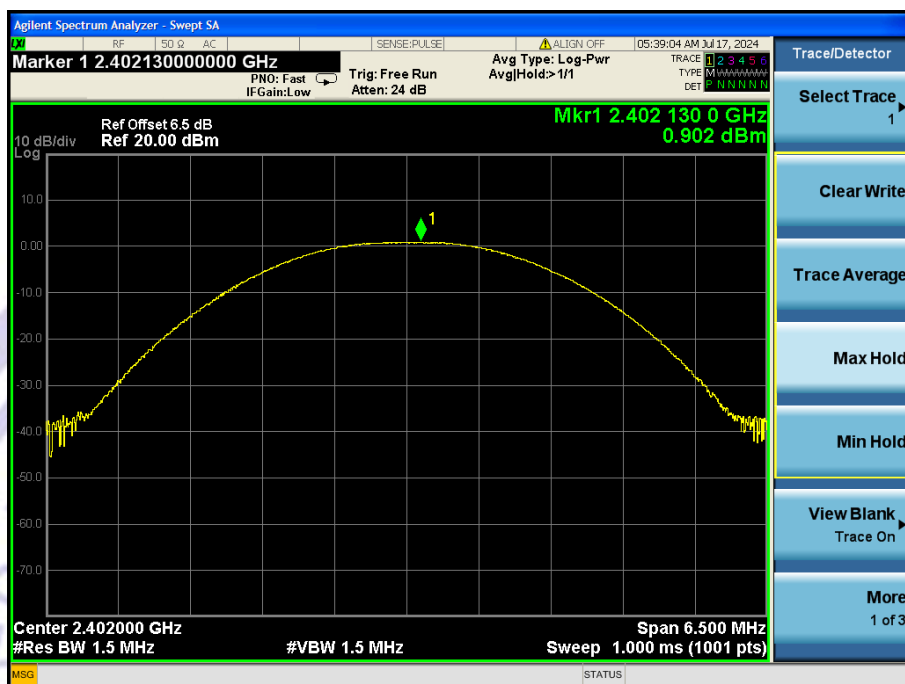

$\pi/4$ -DQPSK Middle Channel

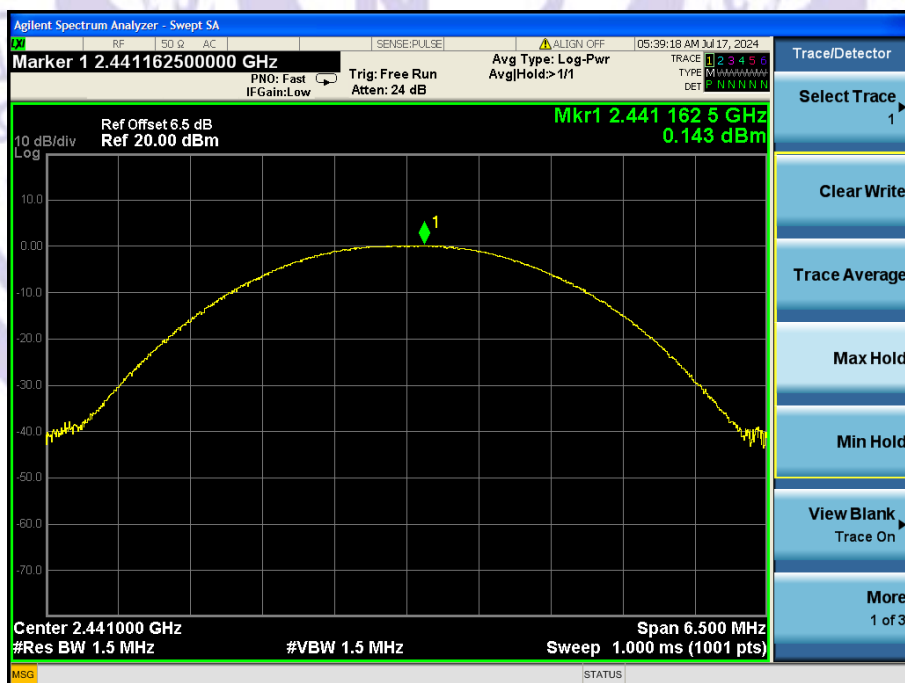

$\pi/4$ -DQPSK High Channel

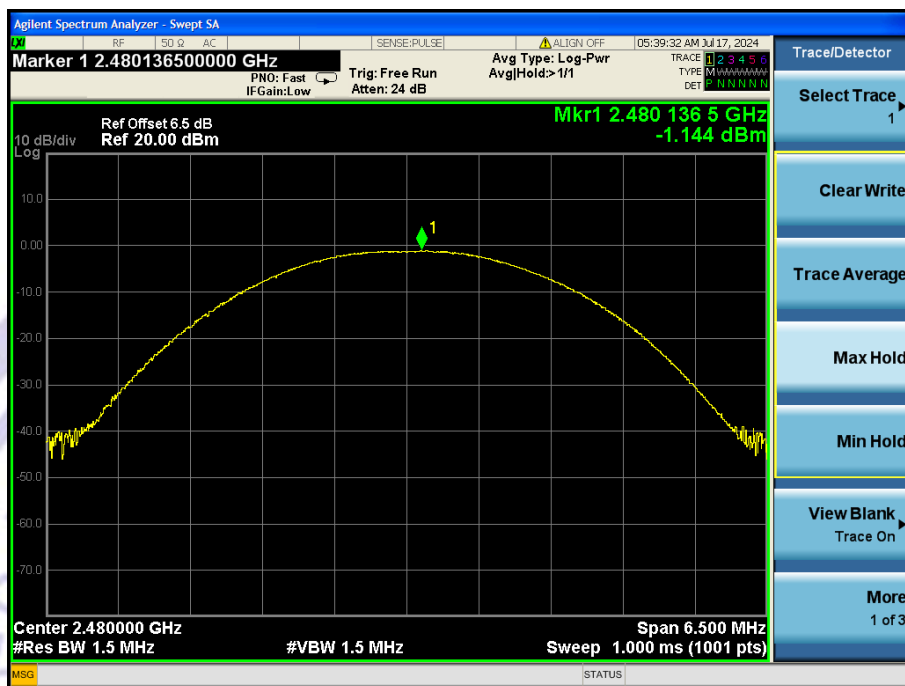


9 20DB Occupy Bandwidth Test(For FHSS)

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

9.2 Test Setup



9.3 Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4 Test Data


Left earphone

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.878	Pass
	Middle	0.879	
	Highest	0.921	
$\pi/4$ -DQPSK	Lowest	1.268	Pass
	Middle	1.276	
	Highest	1.270	


Test plots
GFSK Low Channel




GFSK Middle Channel

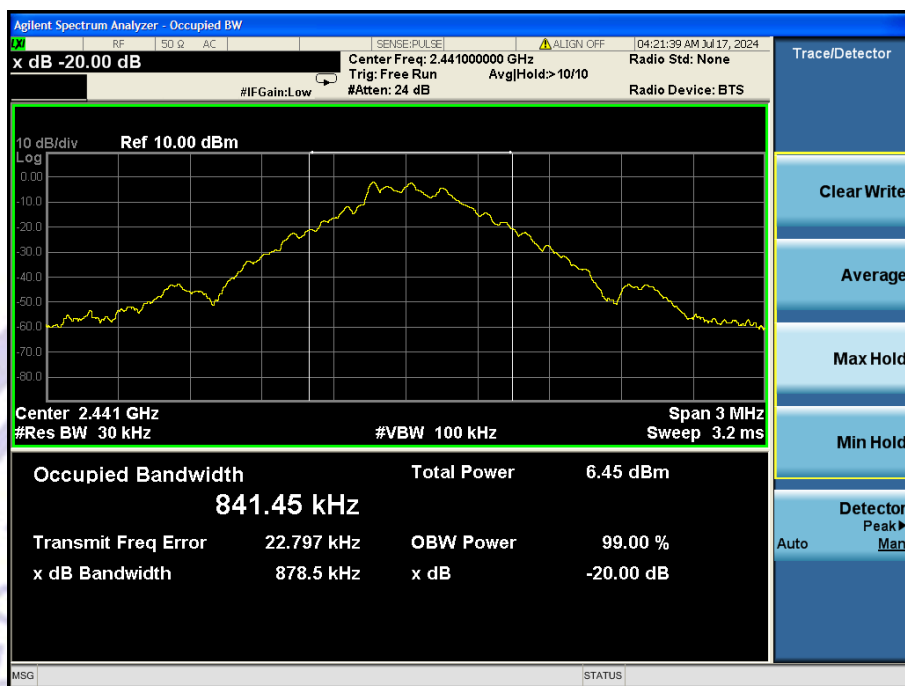


GFSK High Channel

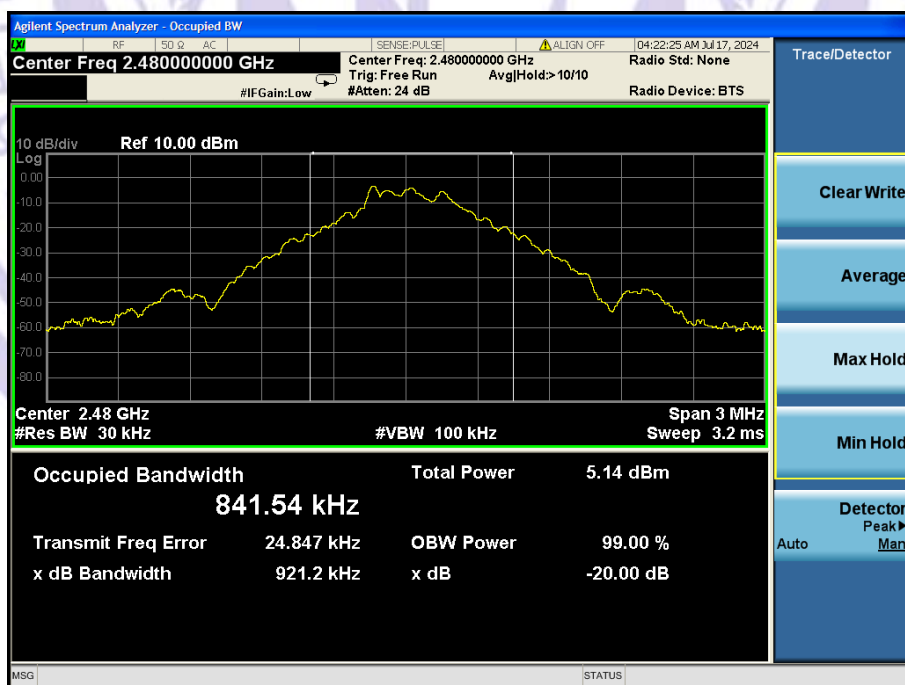

$\pi/4$ -DQPSK Low Channel

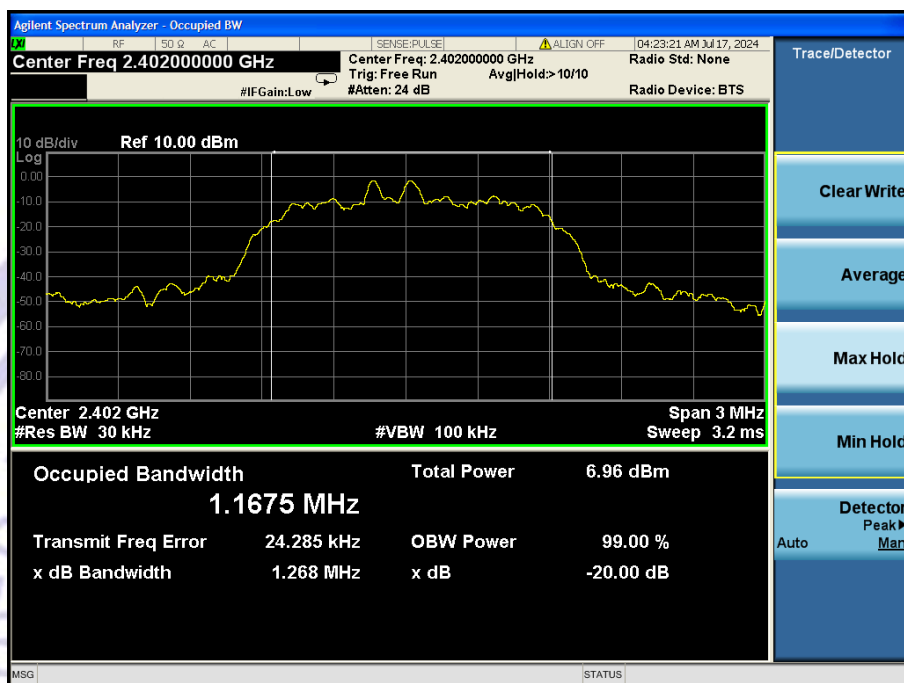

$\pi/4$ -DQPSK Middle Channel

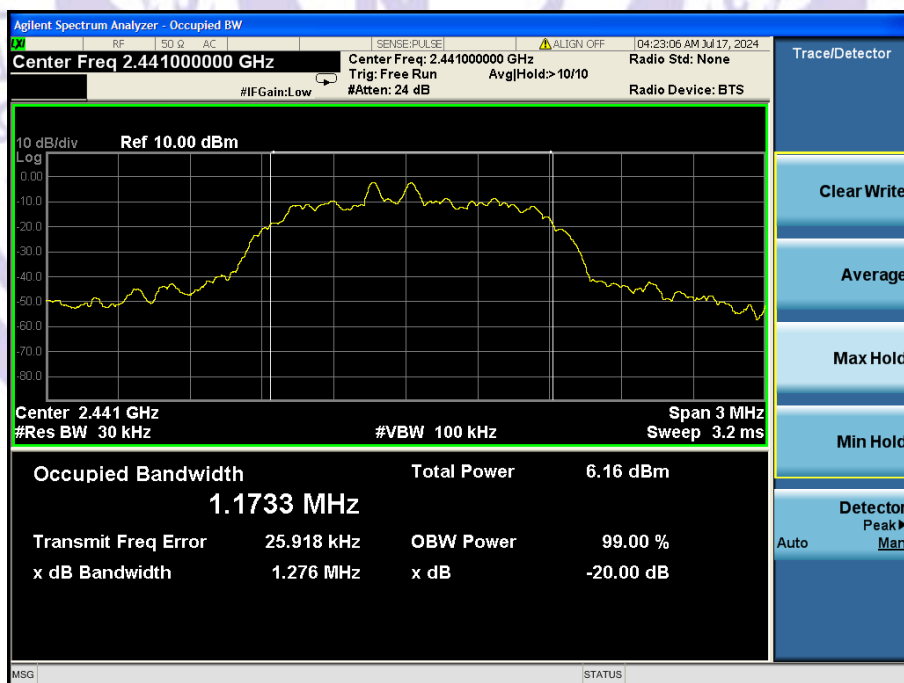

$\pi/4$ -DQPSK High Channel




Right earphone

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.880	Pass
	Middle	0.877	
	Highest	0.923	
$\pi/4$ -DQPSK	Lowest	1.266	Pass
	Middle	1.273	
	Highest	1.265	

Test plots

GFSK Low Channel

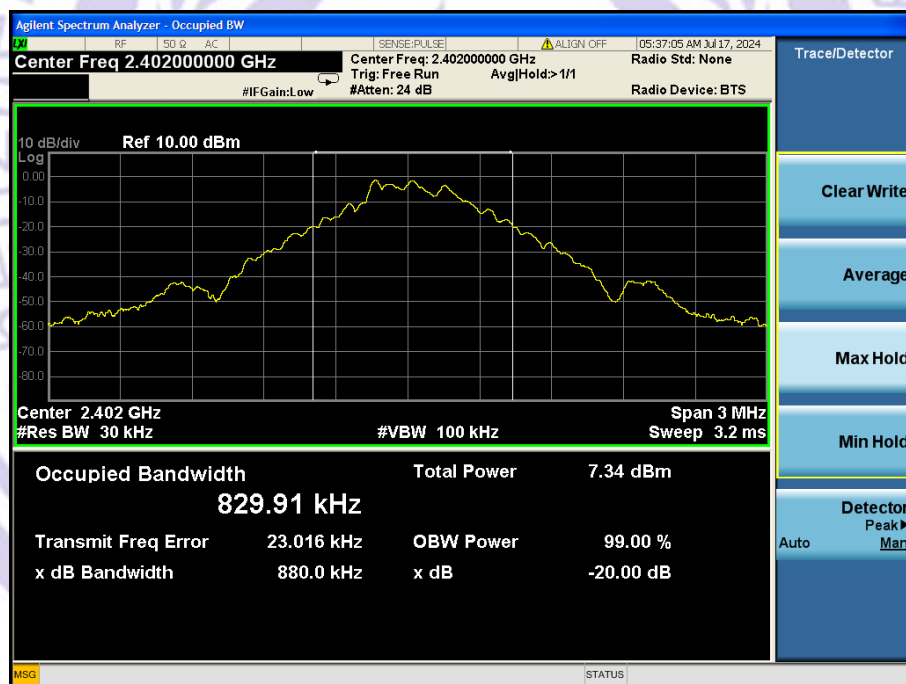


GFSK Middle Channel




GFSK High Channel



$\pi/4$ -DQPSK Low Channel

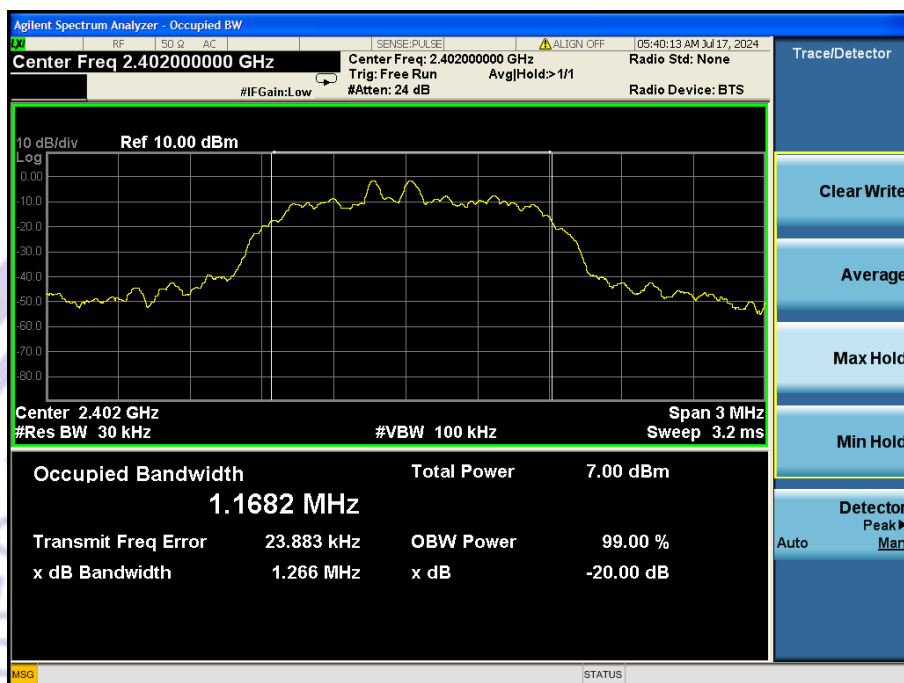

$\pi/4$ -DQPSK Middle Channel

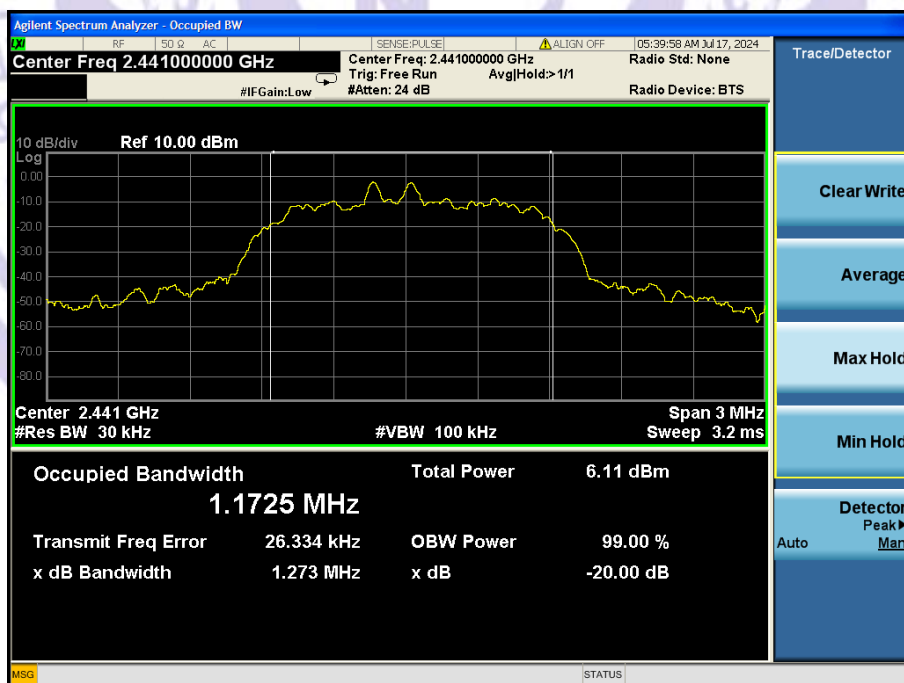

$\pi/4$ -DQPSK High Channel




10 Carrier Frequency Separation Test(For FHSS)

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup



10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 300 kHz.
3. Set the VBW = 1 MHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.


10.4 Test Data

Left earphone


Mode	Test channel	Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	Low	1002.0	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1002.0		Pass
	High	1002.0		Pass
$\pi/4$ -DQPSK	Low	1002.0	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1002.0		Pass
	High	1002.0		Pass

Test plots


GFSK Low Channel

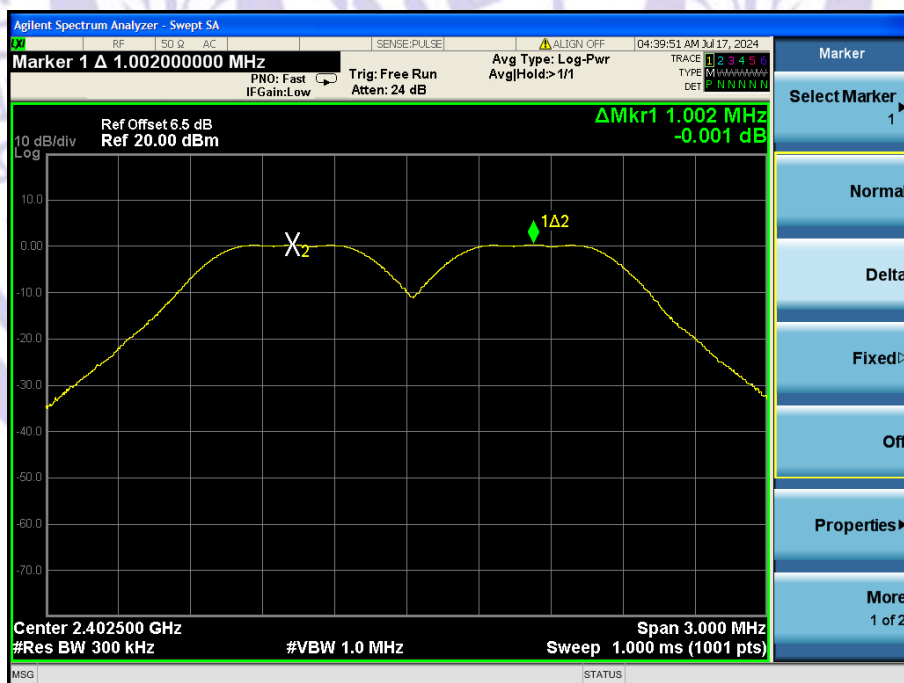


GFSK Middle Channel

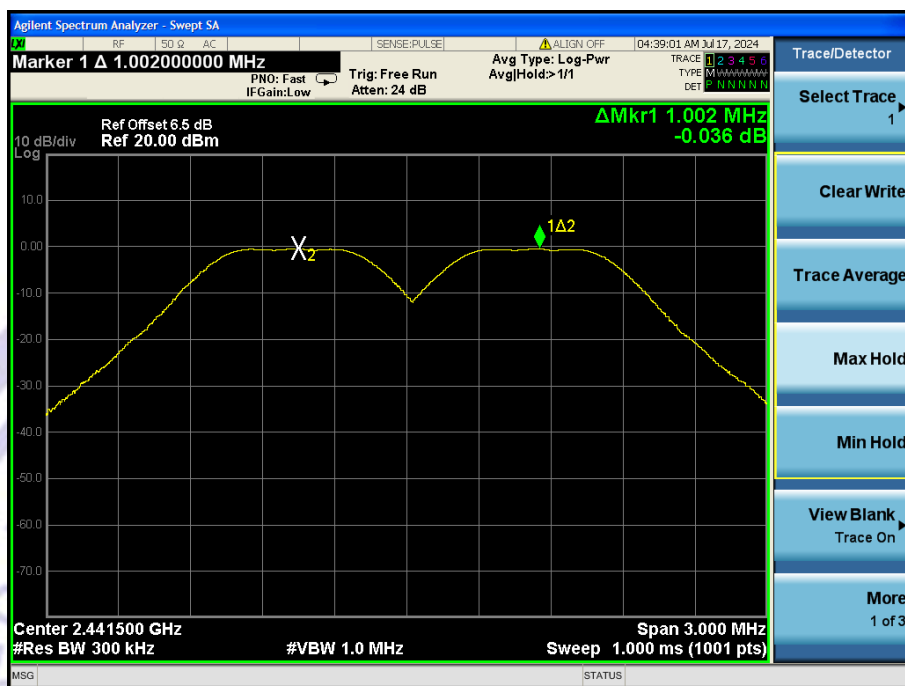


GFSK High Channel

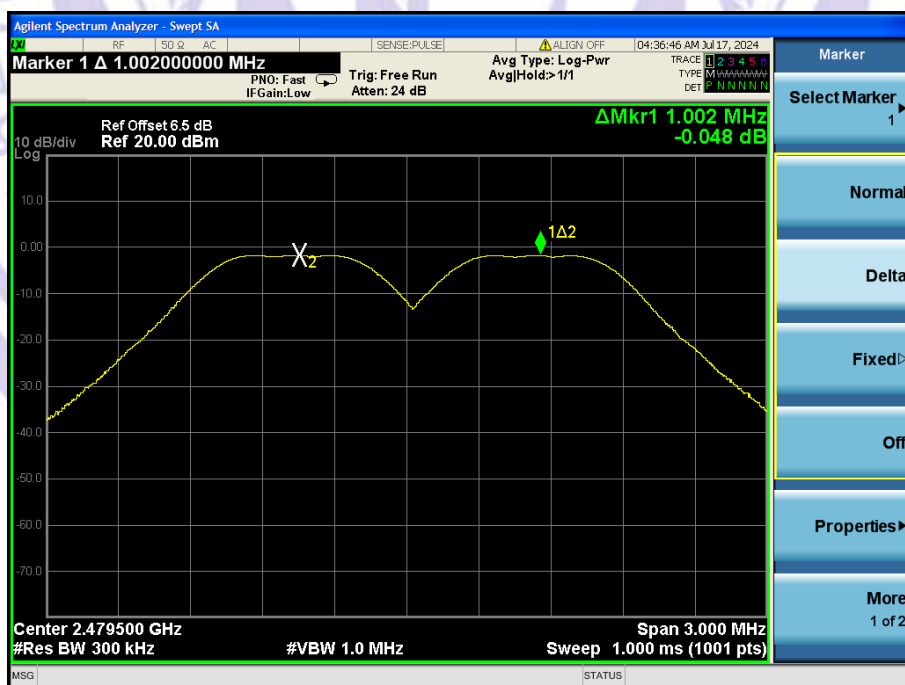


$\pi/4$ -DQPSK Low Channel

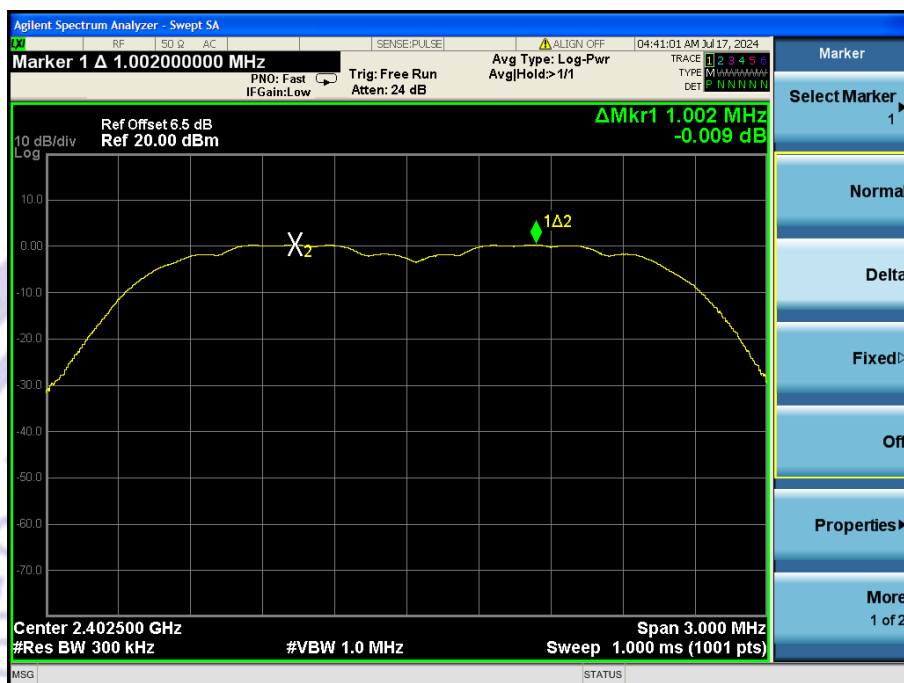

$\pi/4$ -DQPSK Middle Channel

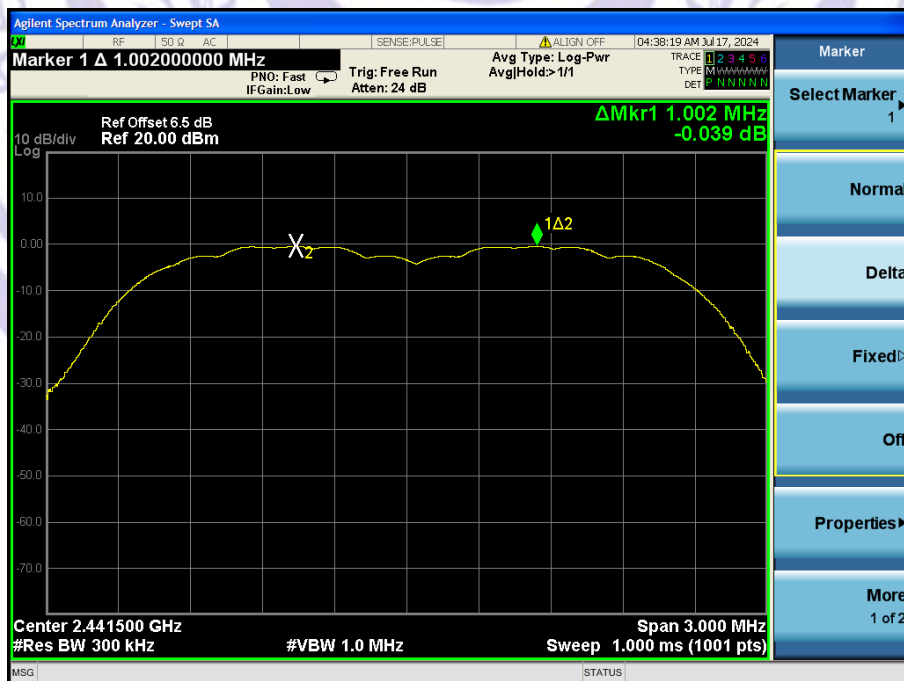


$\pi/4$ -DQPSK High Channel

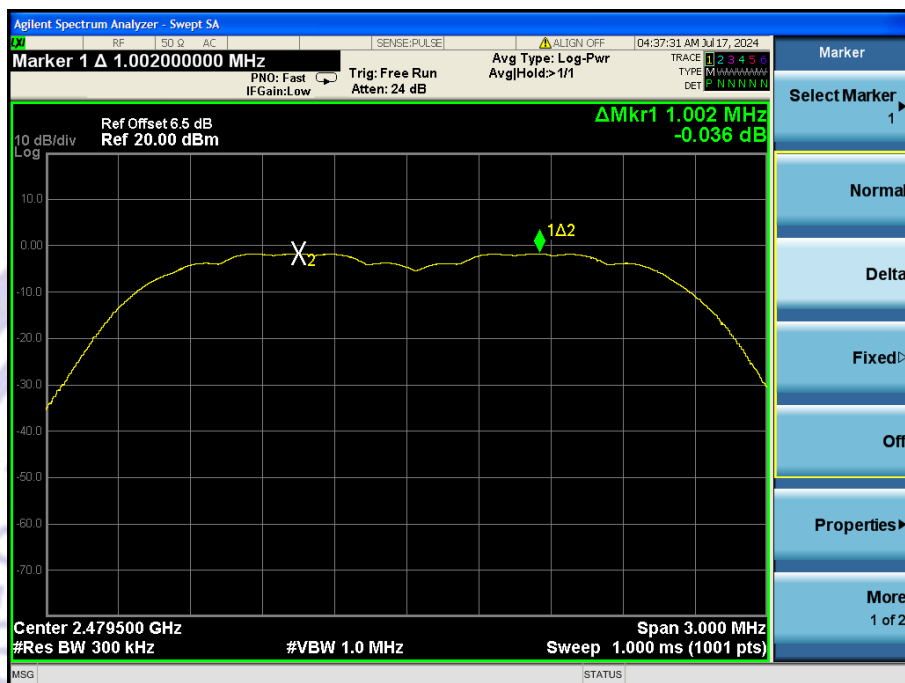


Right earphone

Mode	Test channel	Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	Low	1002.0	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1002.0		Pass
	High	1002.0		Pass
$\pi/4$ -DQPSK	Low	1002.0	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1002.0		Pass
	High	1002.0		Pass


Test plots GFSK Low Channel

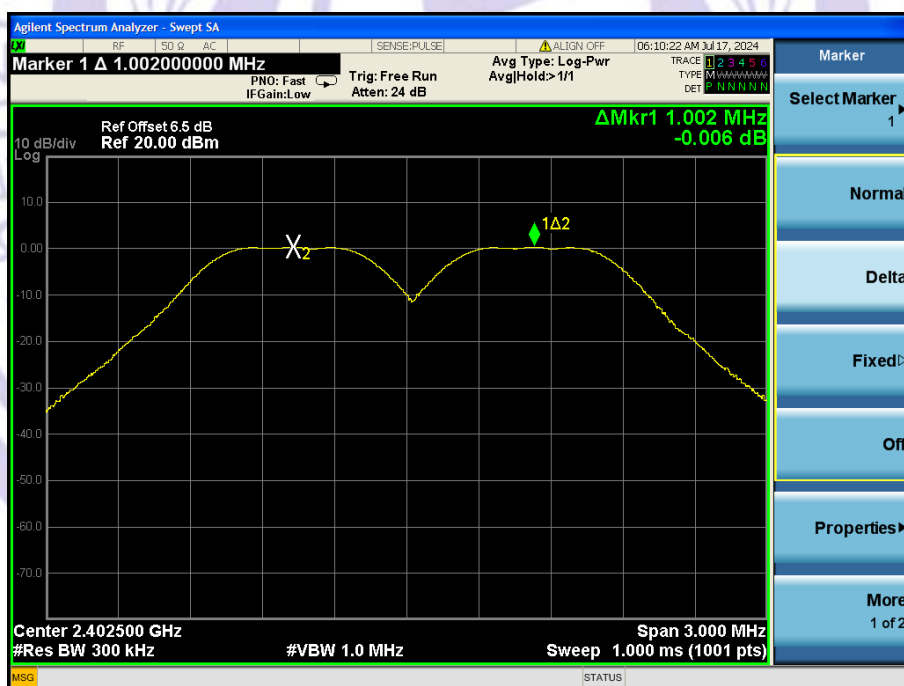


GFSK Middle Channel

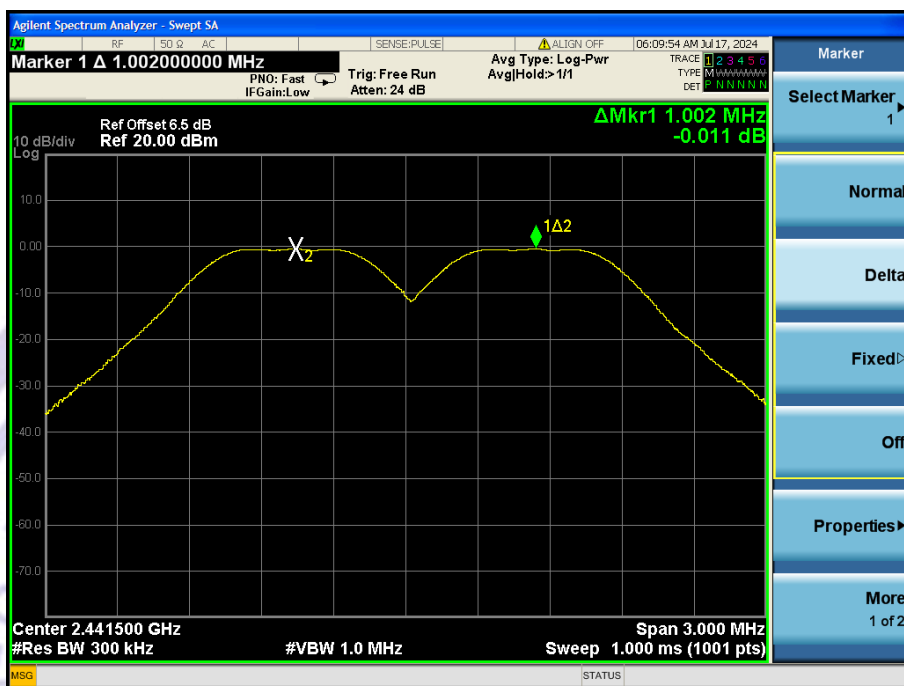


GFSK High Channel

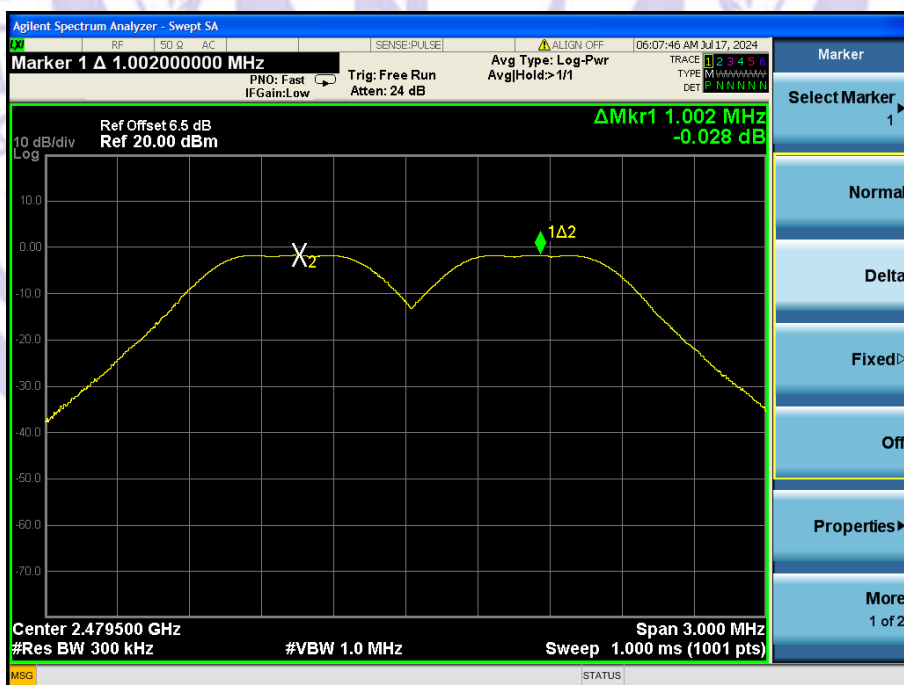


$\pi/4$ -DQPSK Low Channel

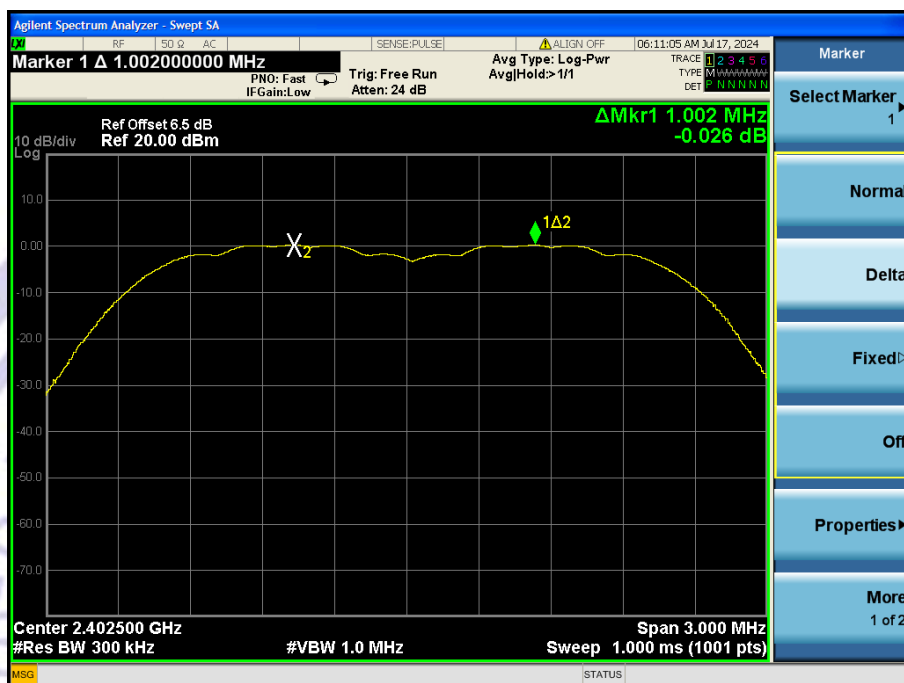

$\pi/4$ -DQPSK Middle Channel

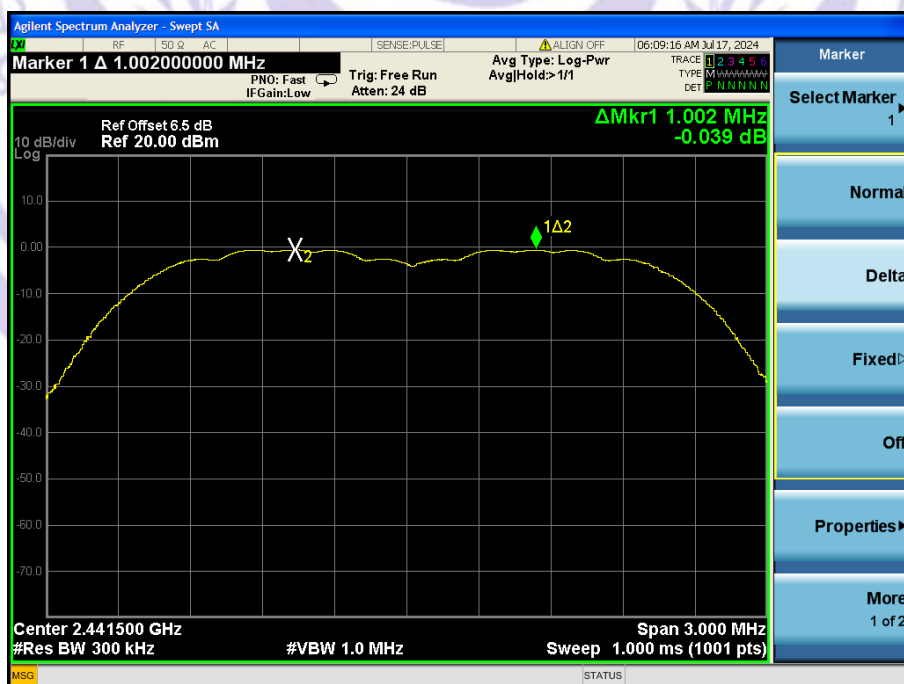

$\pi/4$ -DQPSK High Channel

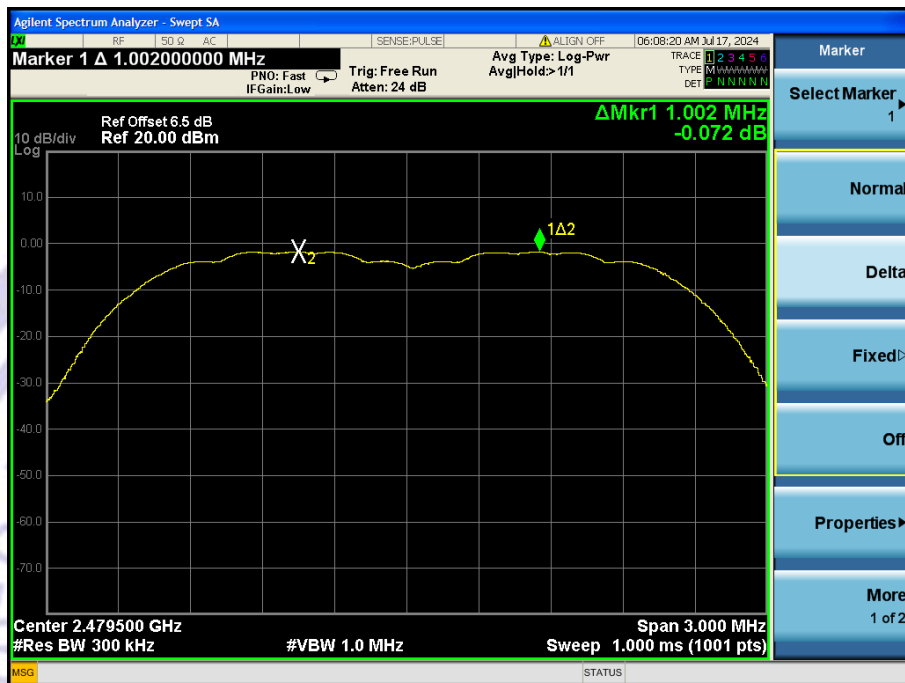


11 Number of Hopping Channel Test(For FHSS)

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup



11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 300kHz.
3. Set the VBW = 1MHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

11.4 Test Data



Left earphone

Mode	Hopping channel numbers	Limit	Result
GFSK	79	≥15	Pass
$\pi/4$ -DQPSK	79		Pass



Test Plots:

79 Channels in total

GFSK

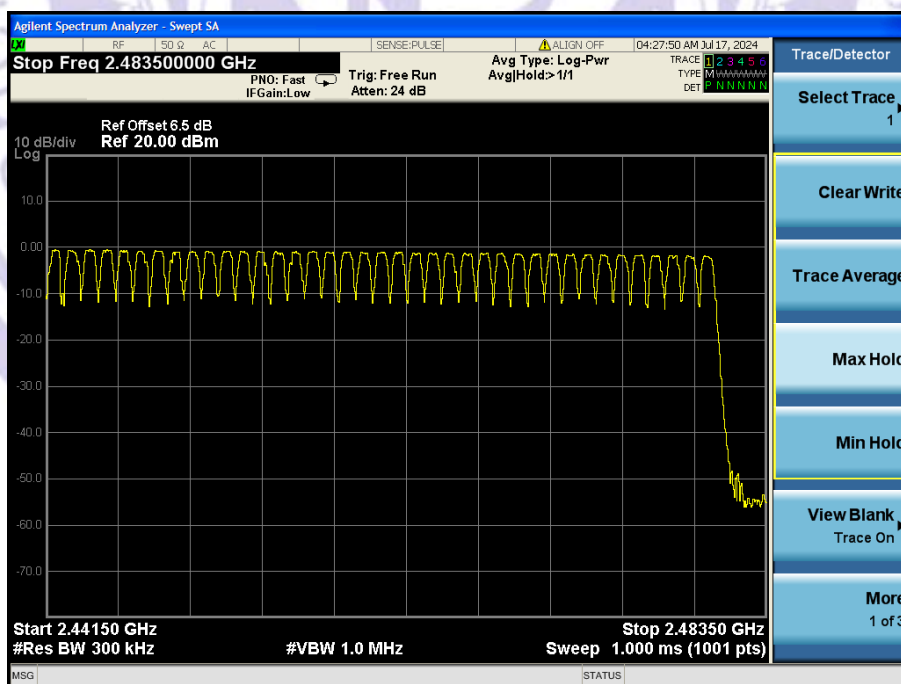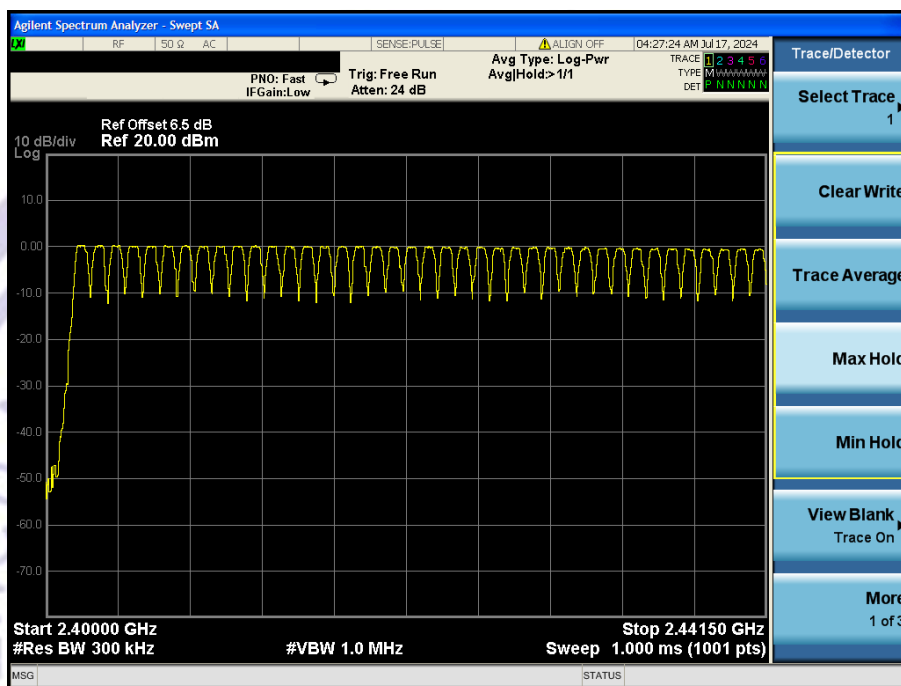


$\pi/4$ -DQPSK

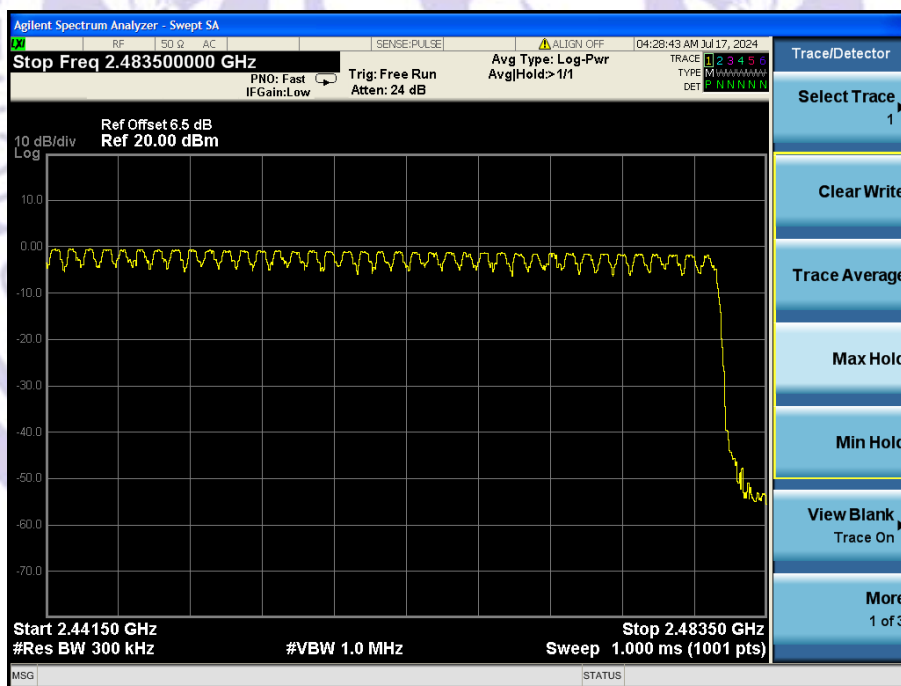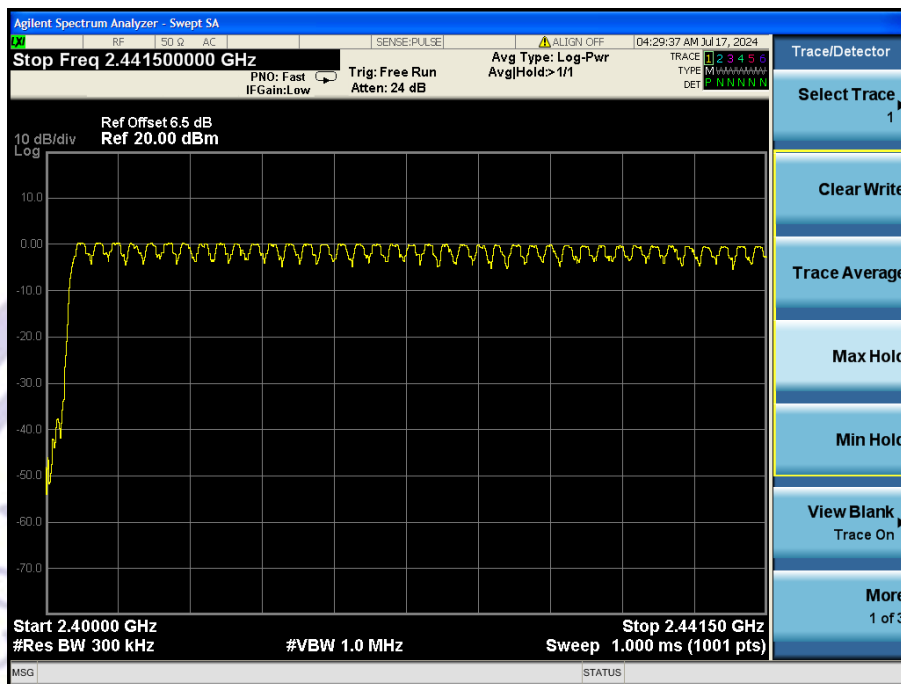

Right earphone



Mode	Hopping channel numbers	Limit	Result
GFSK	79	≥15	Pass
$\pi/4$ -DQPSK	79		Pass

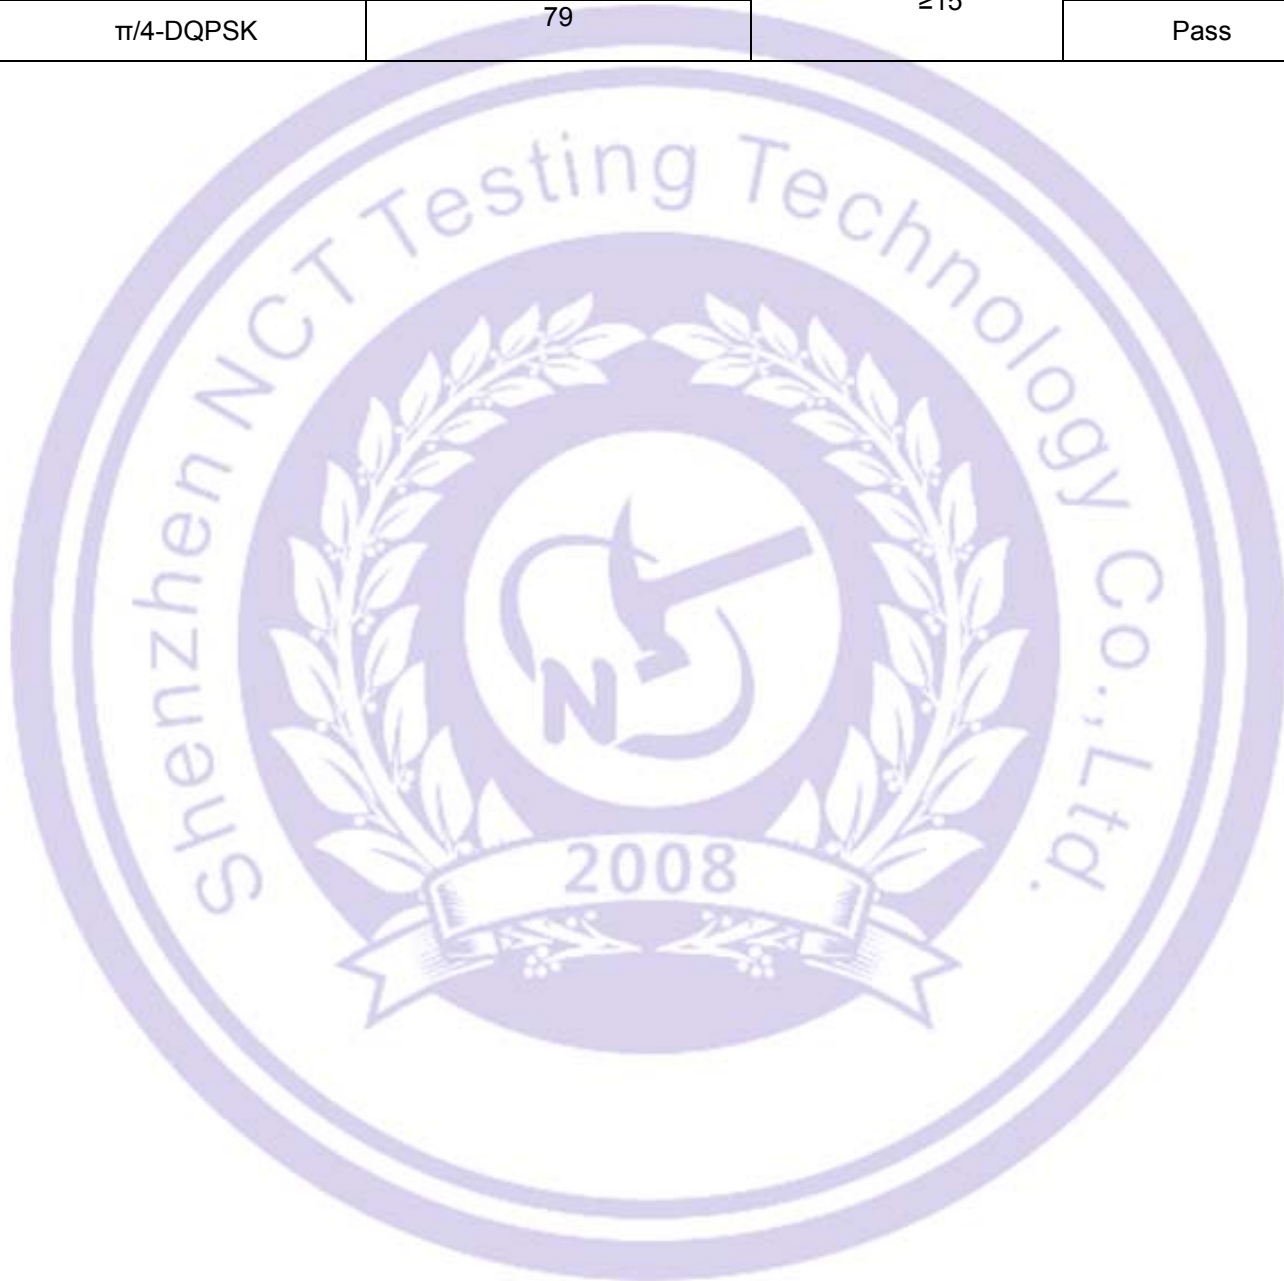



Test Plots:

79 Channels in total

GFSK

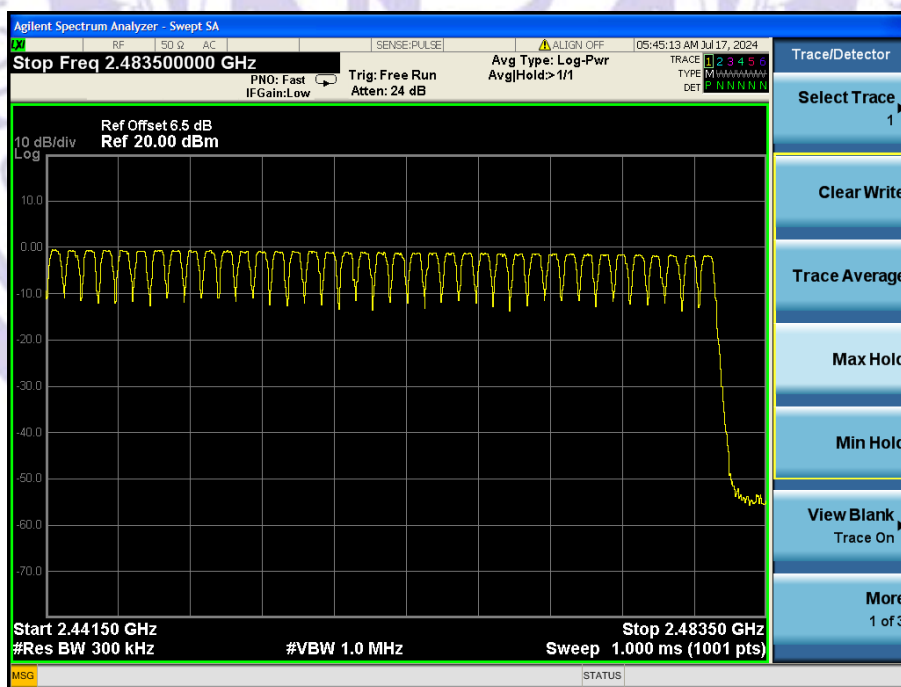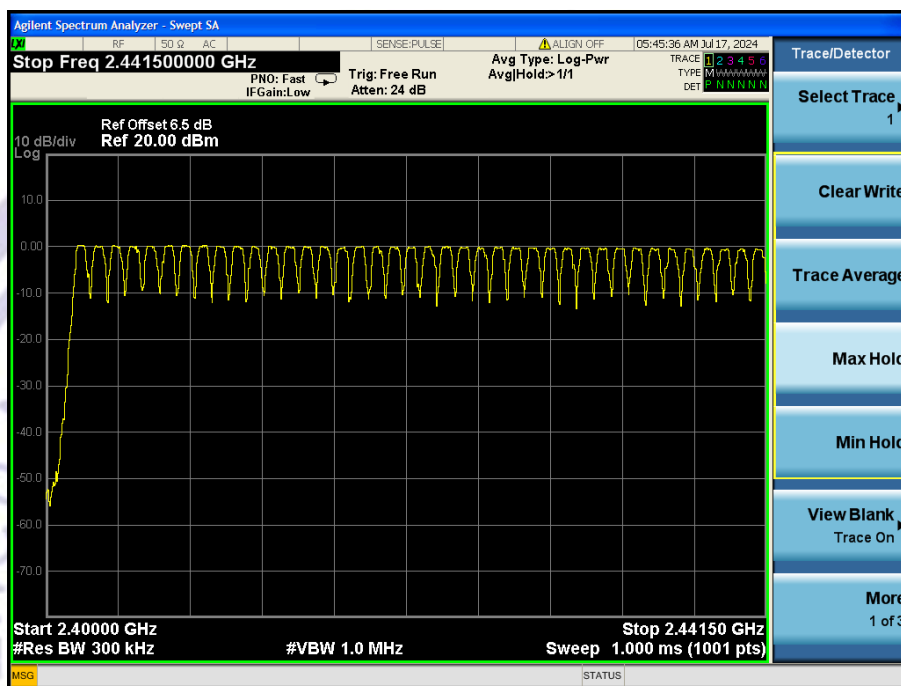

$\pi/4$ -DQPSK

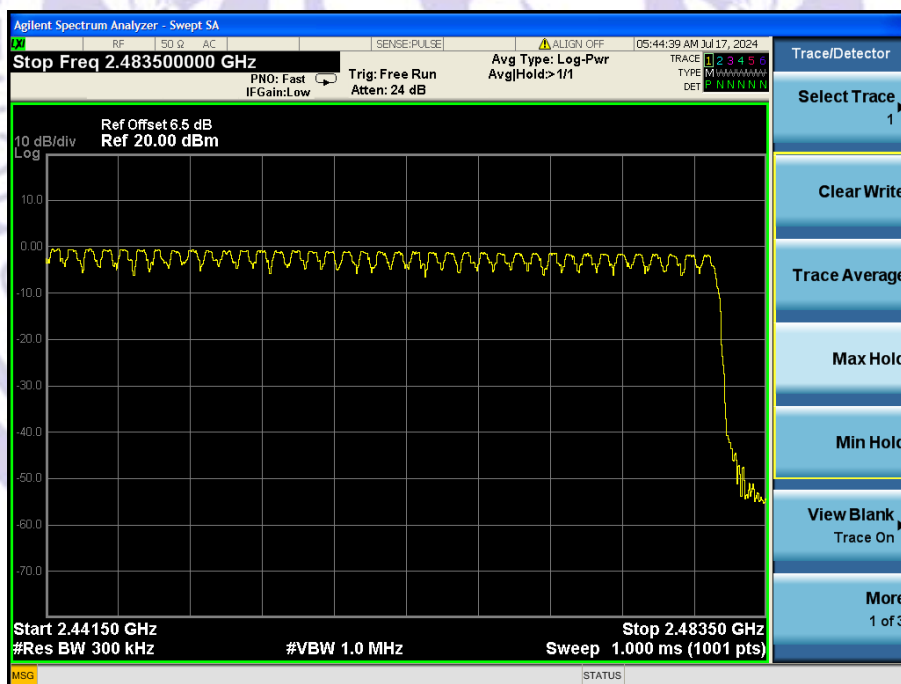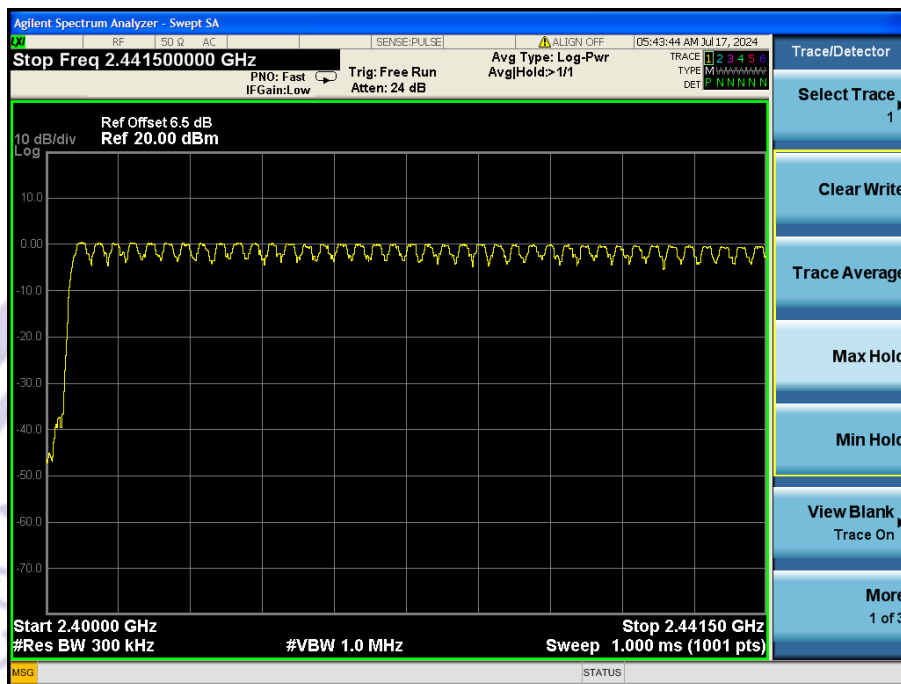


12 Dwell Time Test(For FHSS)

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

12.4 Test Data

Left earphone

GFSK mode:

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	DH1	0.380	122	400	Pass
Hopping	DH3	1.634	261	400	Pass
Hopping	DH5	2.880	307	400	Pass

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 2 $\div$ 79) $\times$ 31.6 Second for DH1, 2-DH1

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 4 $\div$ 79) $\times$ 31.6 Second for DH3, 2-DH3

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second for DH5, 2-DH5

$\pi/4$ -DQPSK mode:

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	DH1	0.386	124	400	Pass
Hopping	DH3	1.638	262	400	Pass
Hopping	DH5	2.888	308	400	Pass

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.


Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 2 $\div$ 79) $\times$ 31.6 Second for DH1, 2-DH1

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 4 $\div$ 79) $\times$ 31.6 Second for DH3, 2-DH3


Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second for DH5, 2-DH5

Test Plots


GFSK DH1 2402MHz

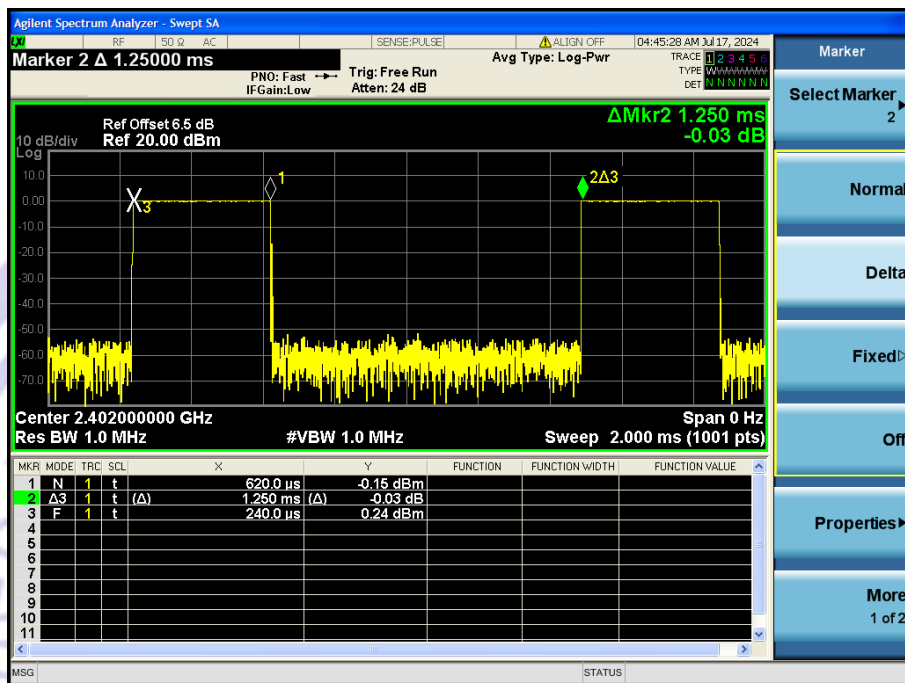


GFSK DH3 2402MHz

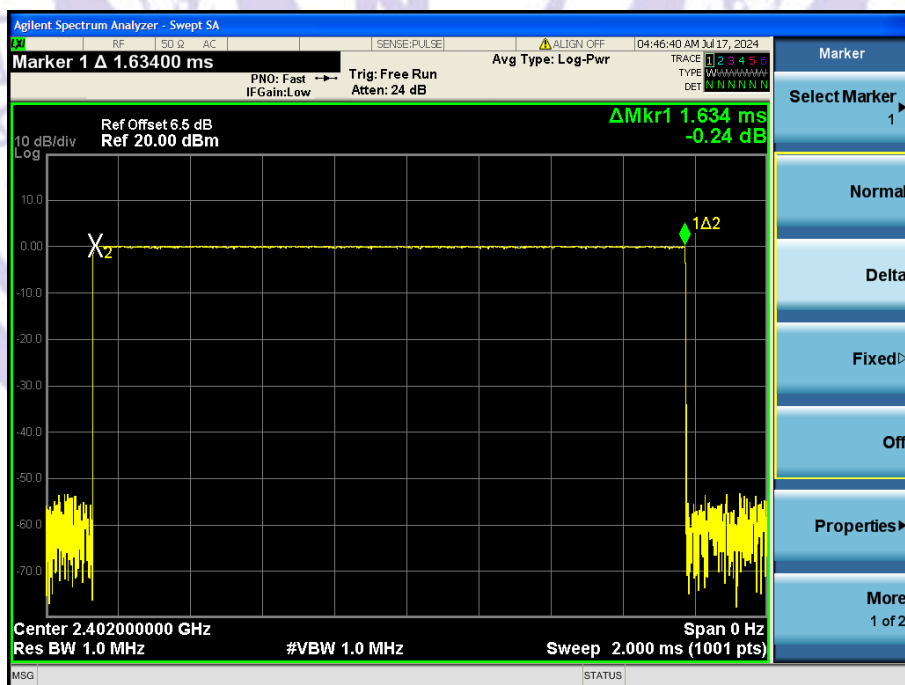


GFSK DH5 2402MHz

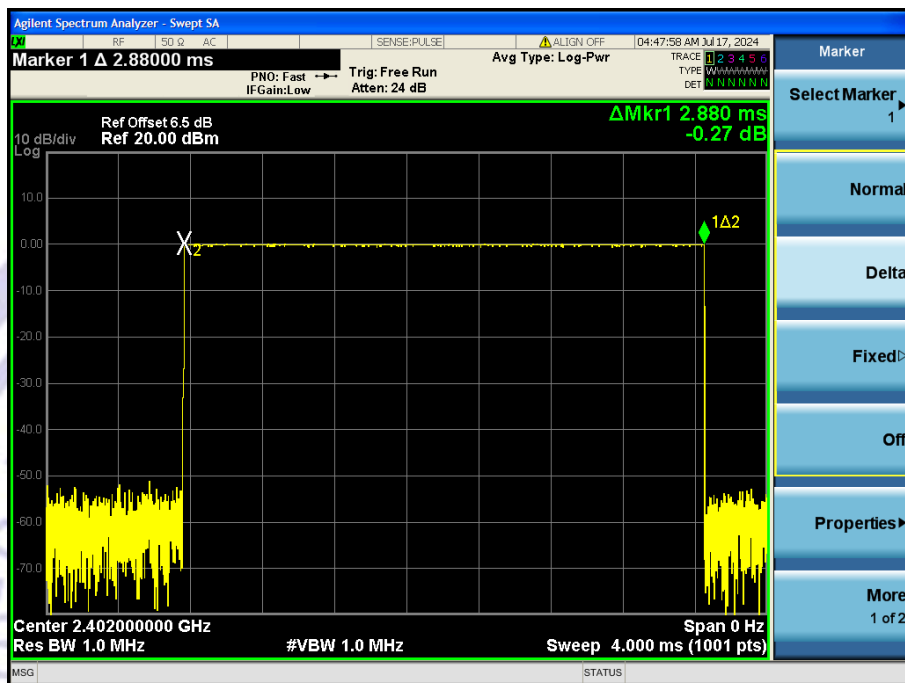


$\pi/4$ -DQPSK 2DH1 2402MHz

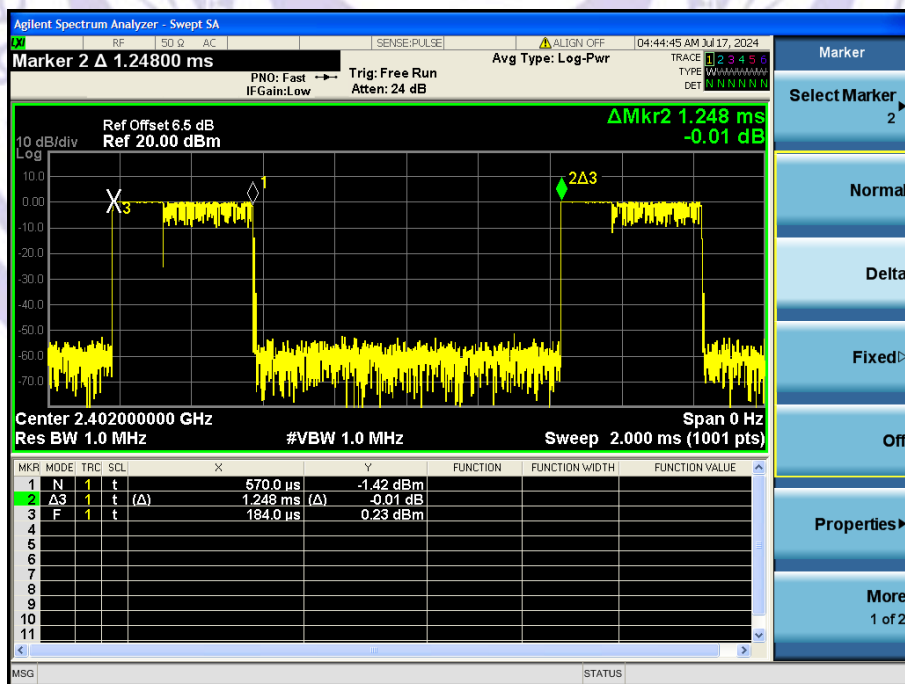

$\pi/4$ -DQPSK 2DH3 2402MHz

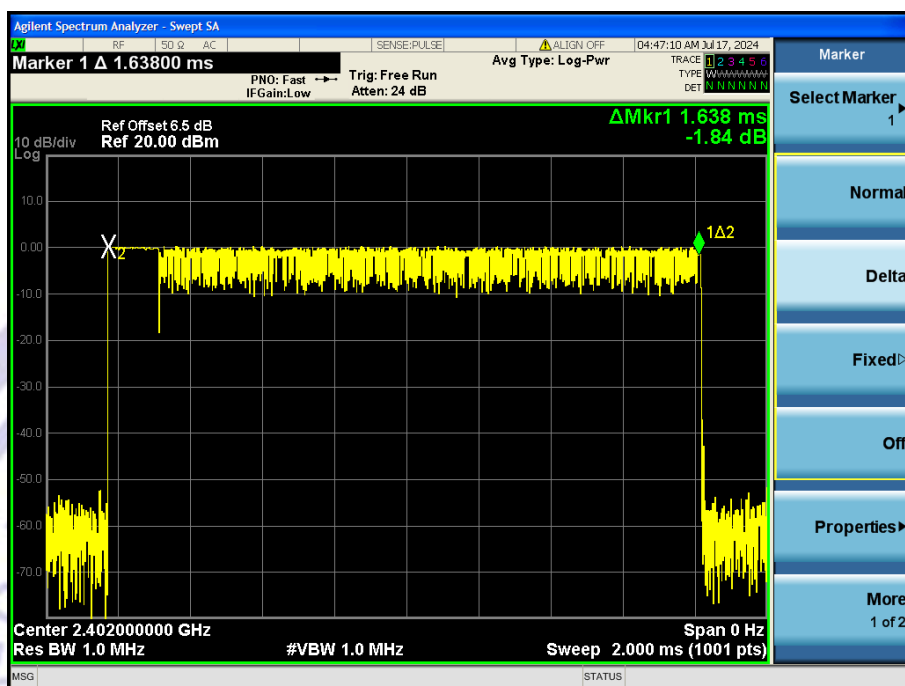

$\pi/4$ -DQPSK 2DH5 2402MHz

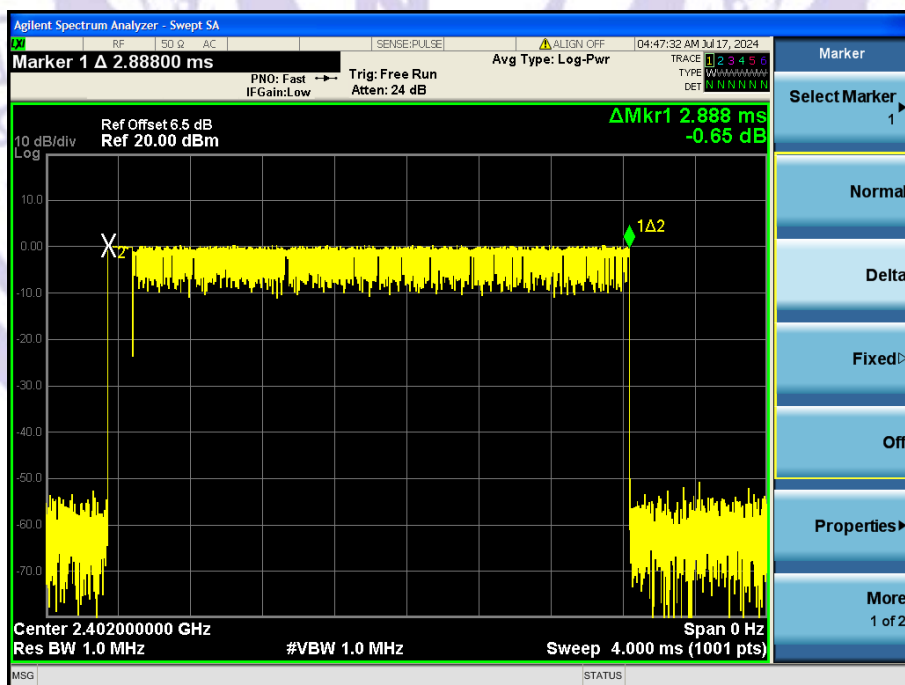

Right earphone**GFSK mode:**

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	DH1	0.378	121	400	Pass
Hopping	DH3	1.636	262	400	Pass
Hopping	DH5	2.876	307	400	Pass

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 2 $\div$ 79) $\times$ 31.6 Second for DH1, 2-DH1

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 4 $\div$ 79) $\times$ 31.6 Second for DH3, 2-DH3

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second for DH5, 2-DH5

 $\pi/4$ -DQPSK mode:

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	DH1	0.388	124	400	Pass
Hopping	DH3	1.632	261	400	Pass
Hopping	DH5	2.884	308	400	Pass

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.


Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 2 $\div$ 79) $\times$ 31.6 Second for DH1, 2-DH1

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 4 $\div$ 79) $\times$ 31.6 Second for DH3, 2-DH3


Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second for DH5, 2-DH5

Test Plots


GFSK DH1 2402MHz

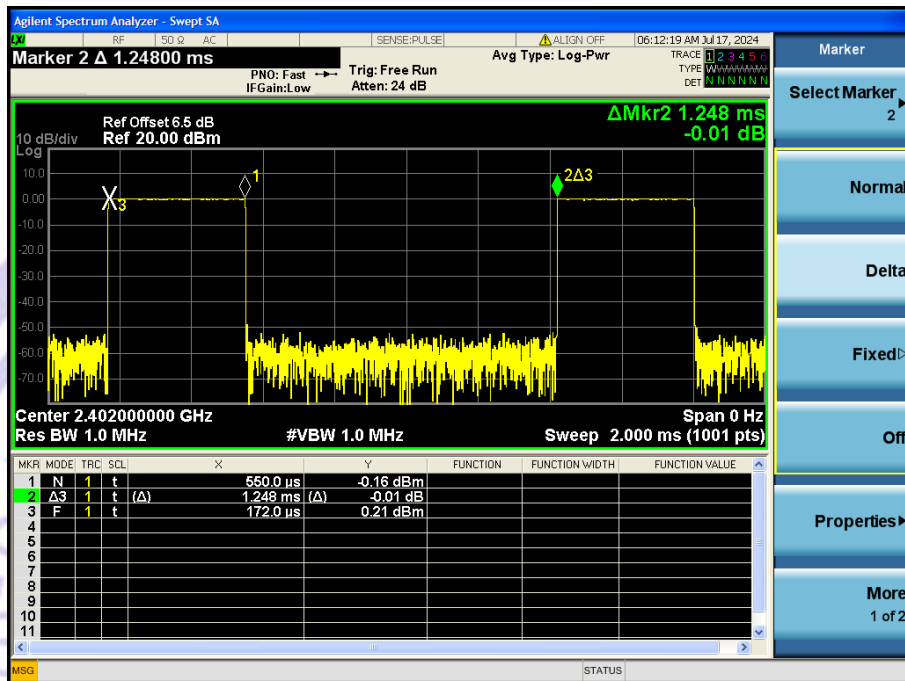


GFSK DH3 2402MHz

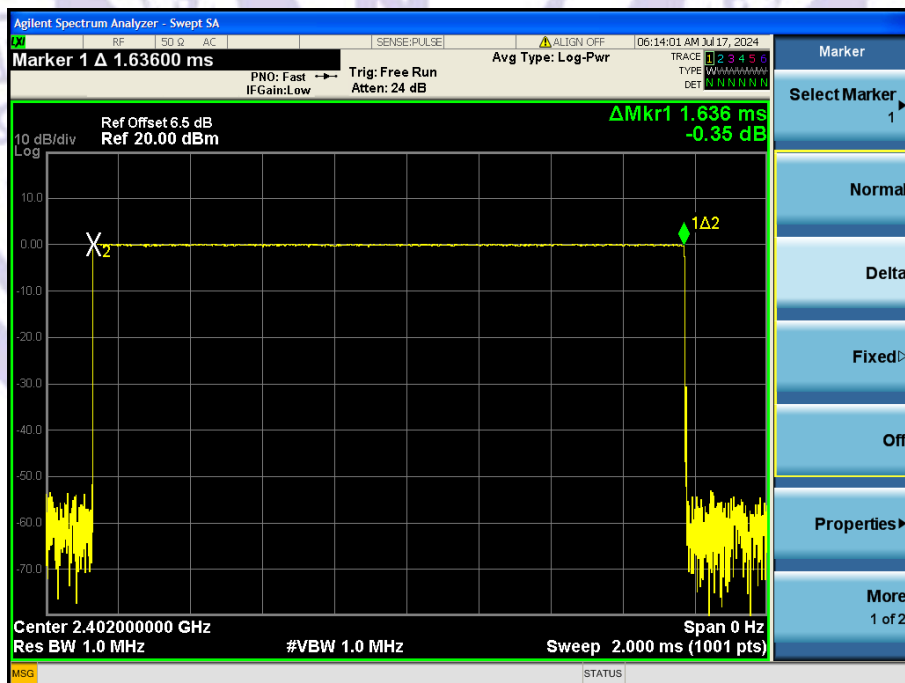


GFSK DH5 2402MHz

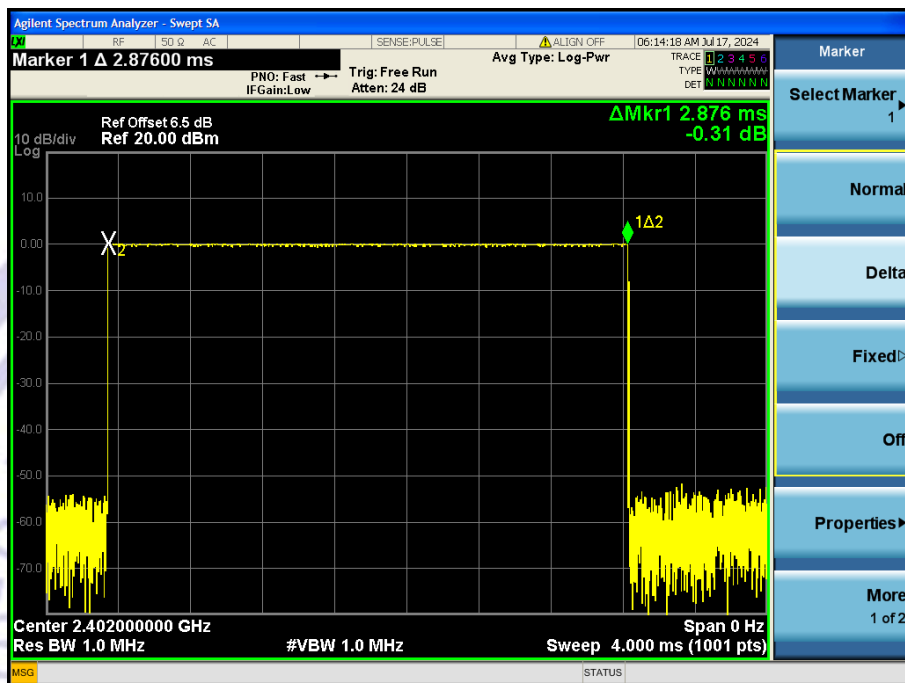


$\pi/4$ -DQPSK 2DH1 2402MHz

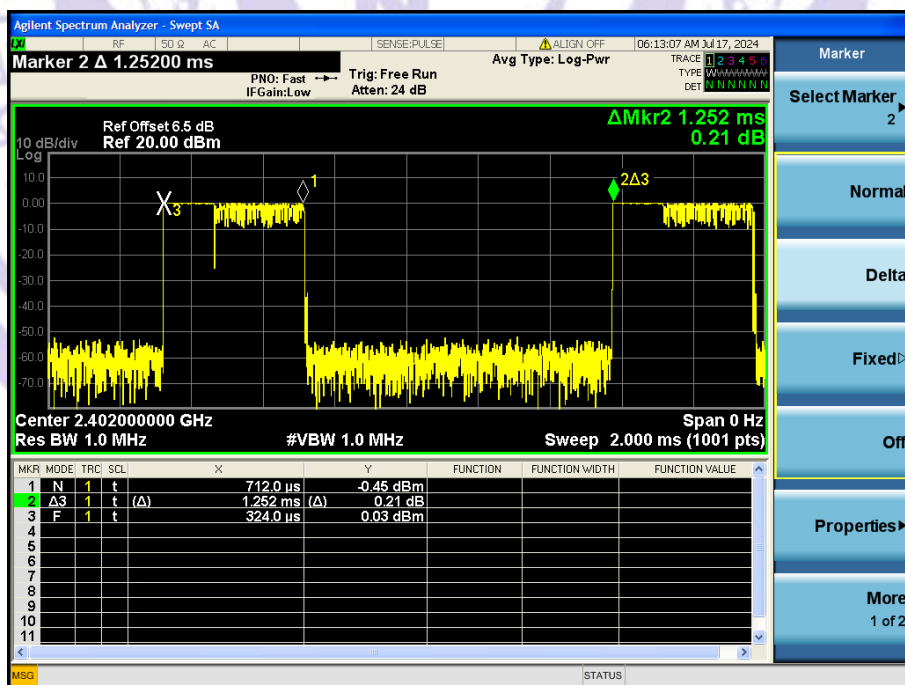

$\pi/4$ -DQPSK 2DH3 2402MHz

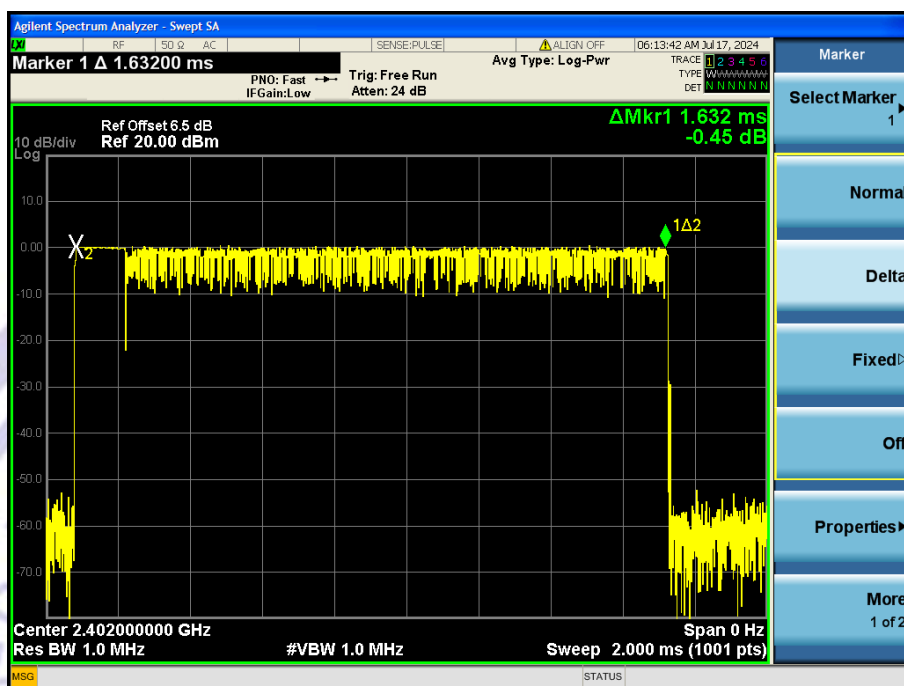

$\pi/4$ -DQPSK 2DH5 2402MHz

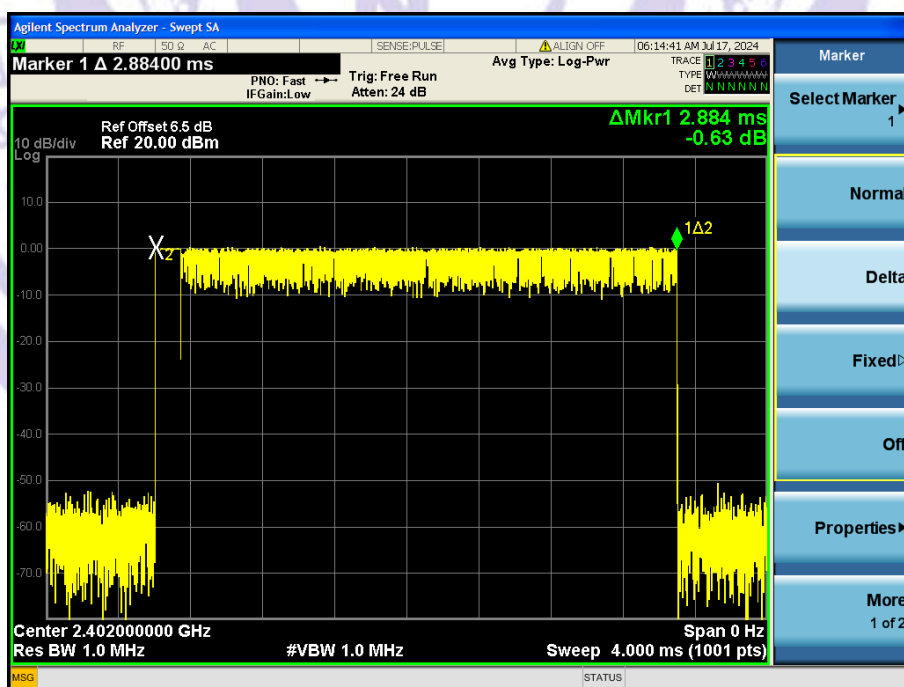


13 100kHz Bandwidth of Frequency Band Edge Requirement

13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2 Test Setup



13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.


13.4 Test Data

BT


Left earphone

GFSK mode:


Data rate 1Mbps

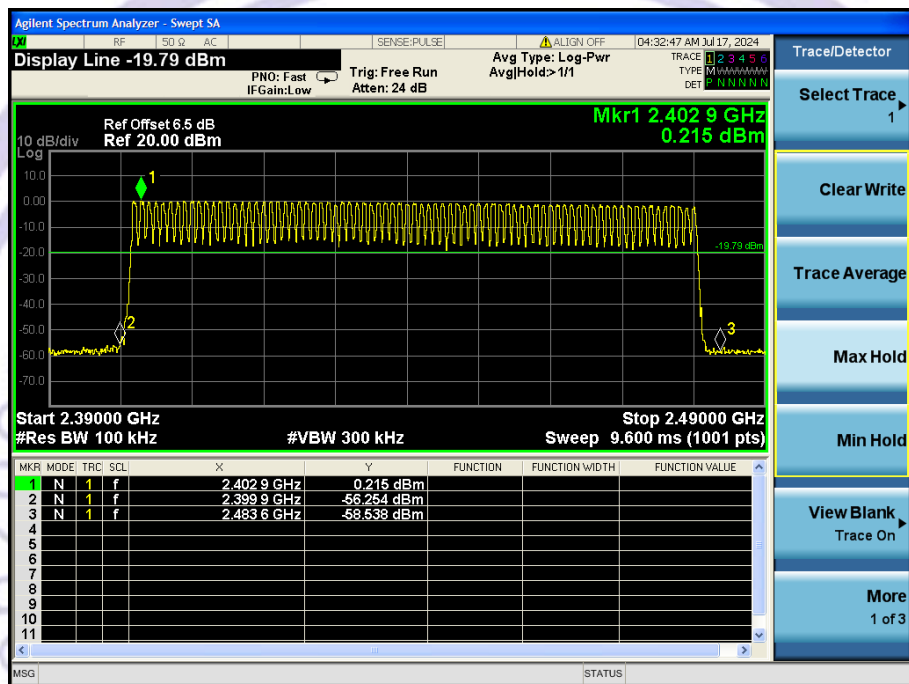


CH00 (Lower) Data rate 1Mbps

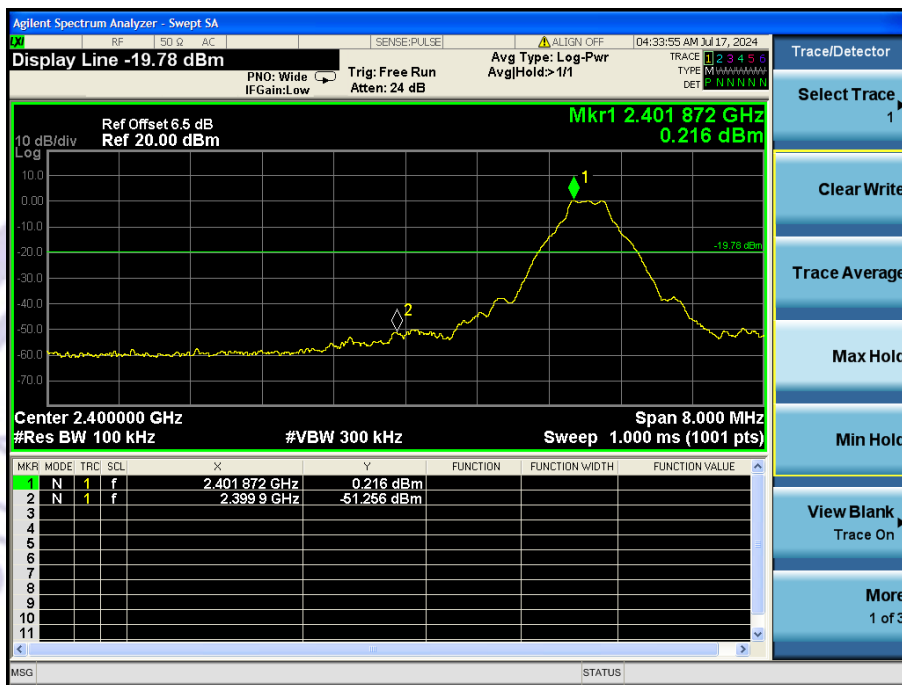


CH 78 (Upper) Data rate 1Mbps

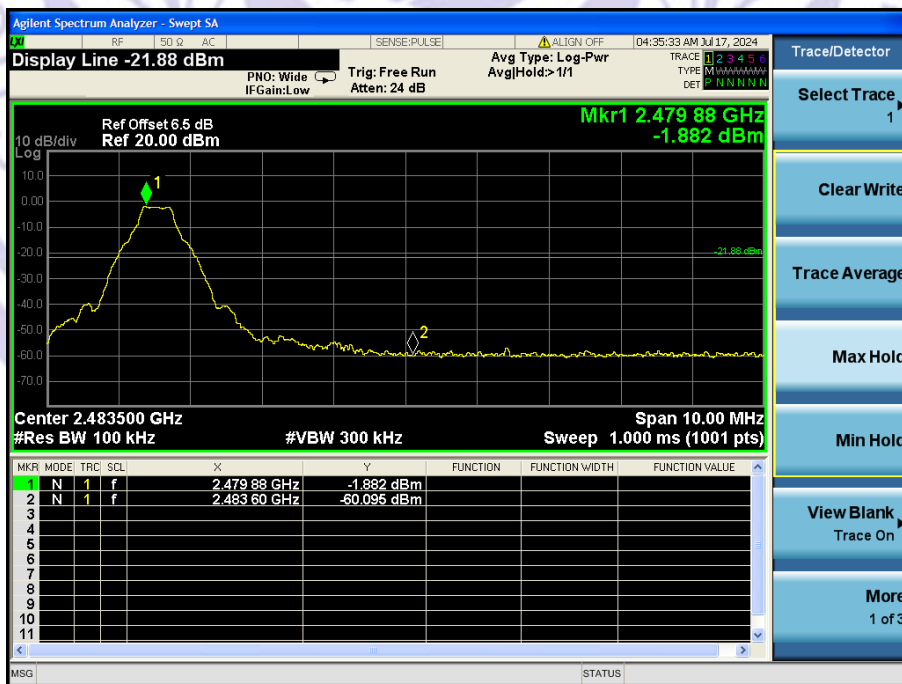


CH01

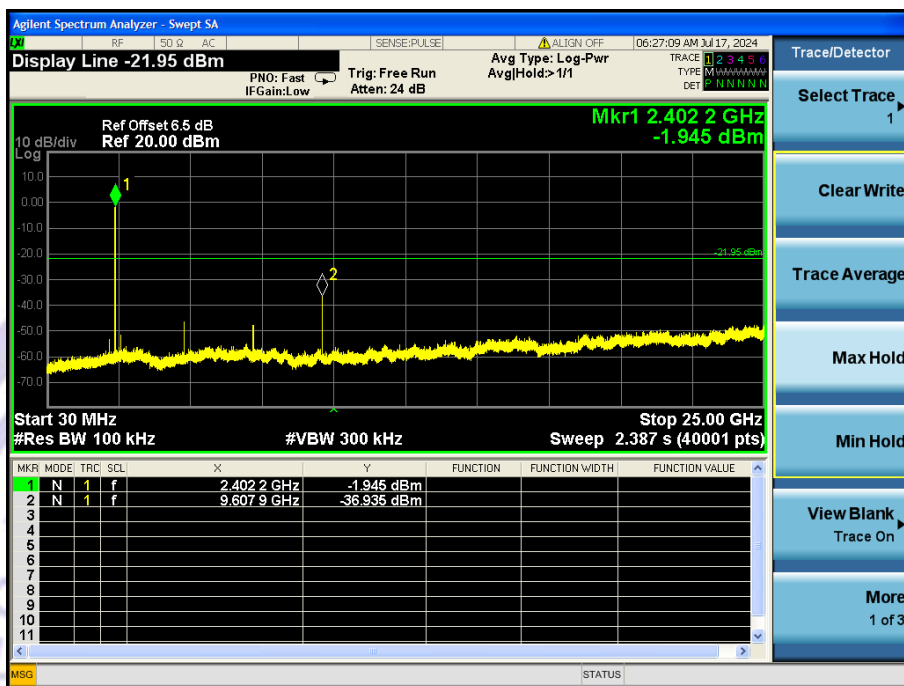

CH39

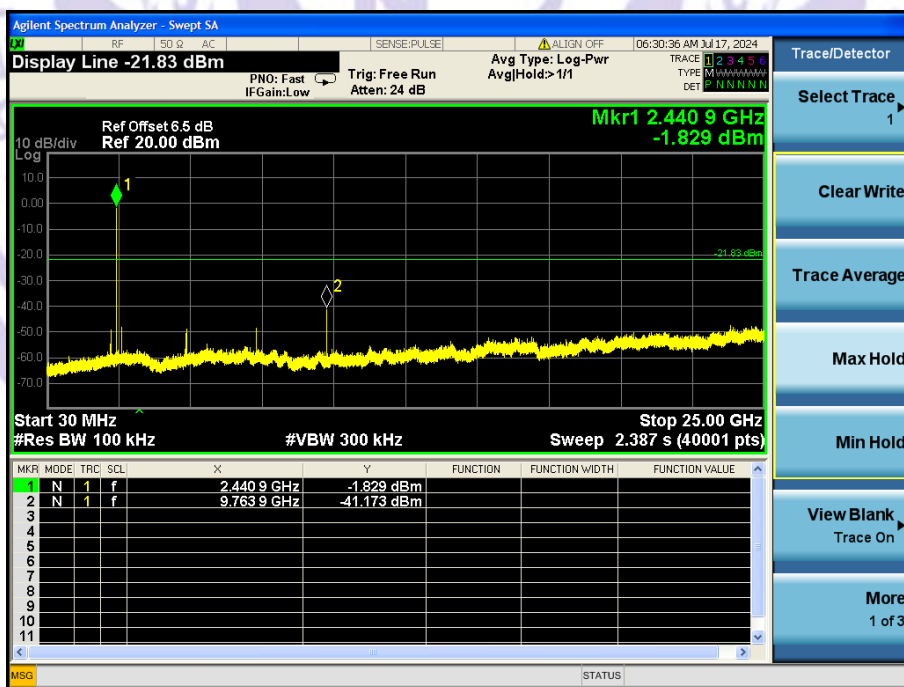


CH78

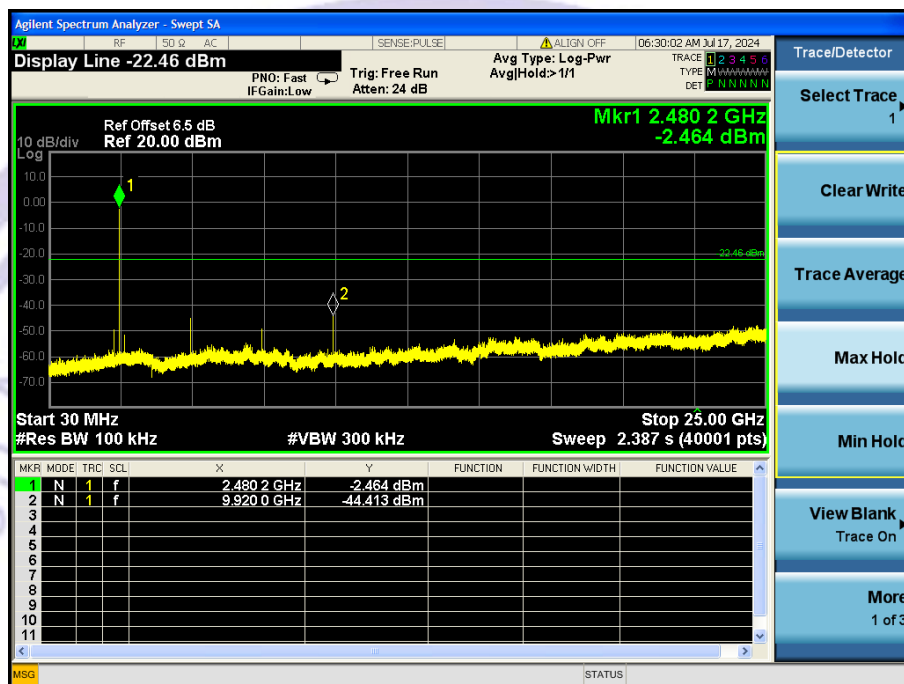


$\pi/4$ -DQPSK mode


Data rate 2Mbps

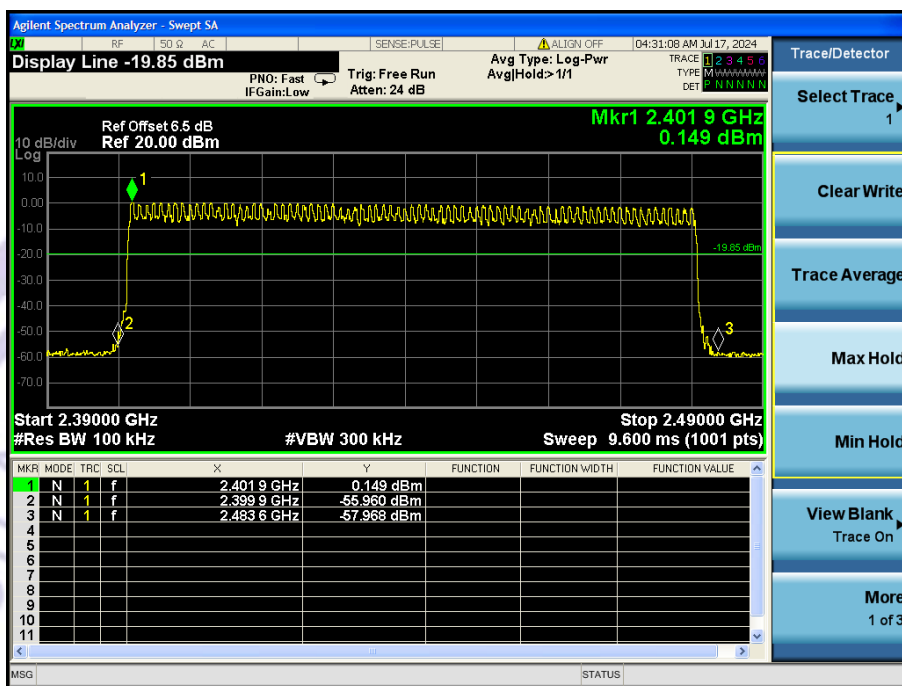


CH00 (Lower) Data rate 2Mbps

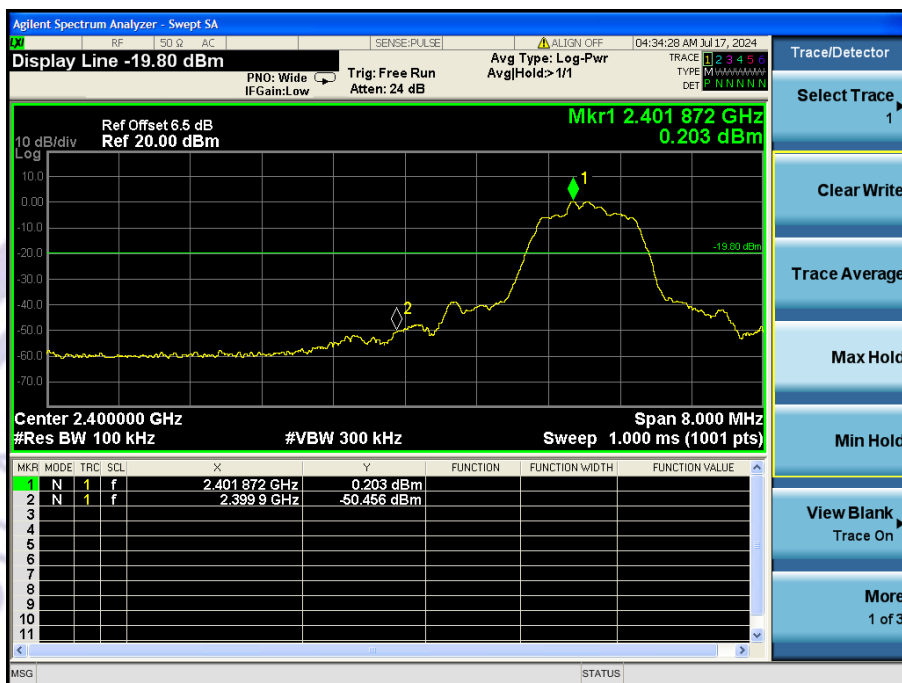


CH 78 (Upper) Data rate 2Mbps

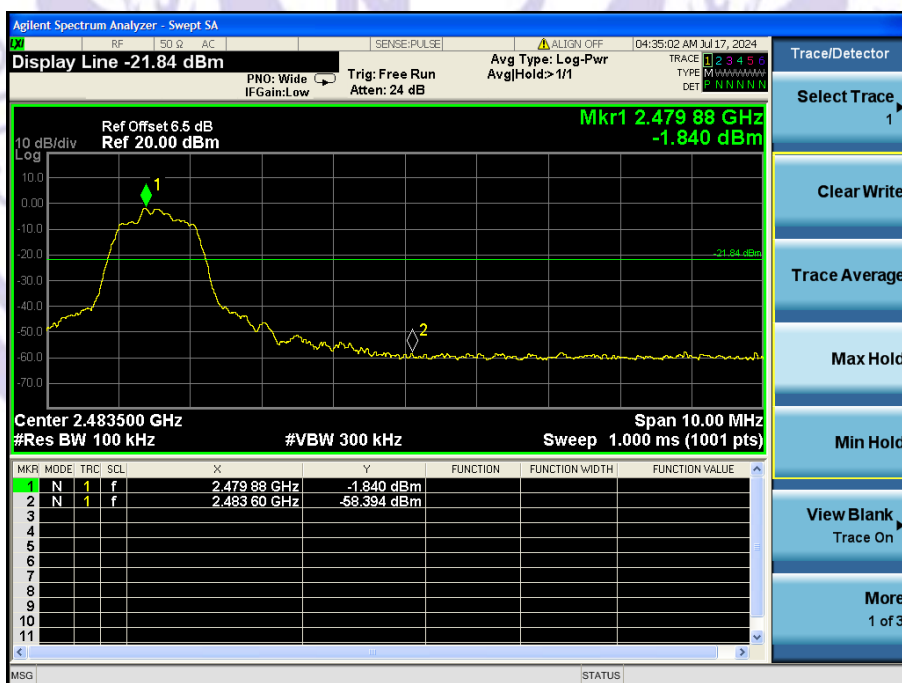


CH01

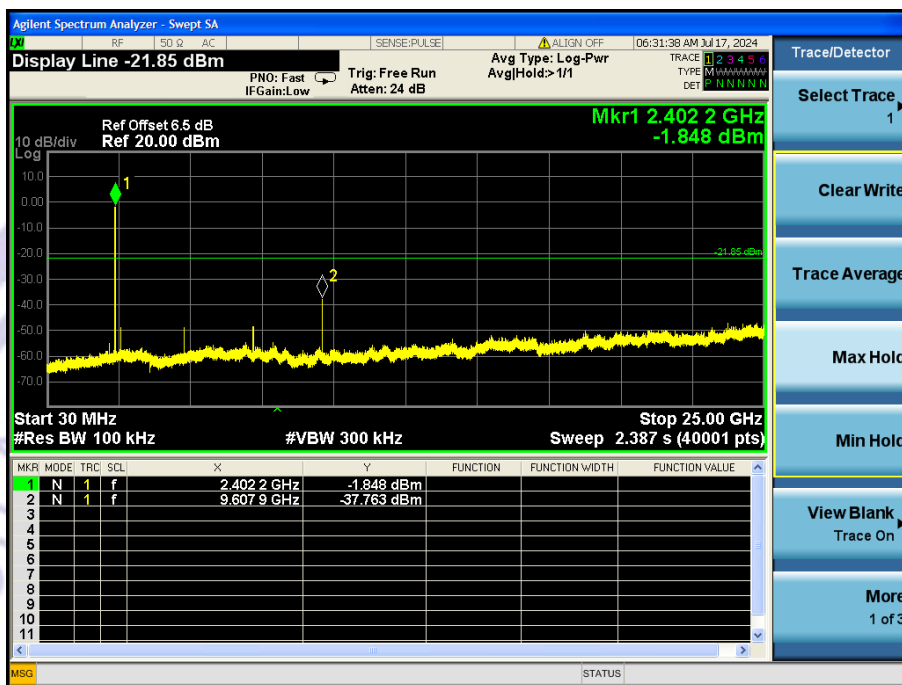

CH39

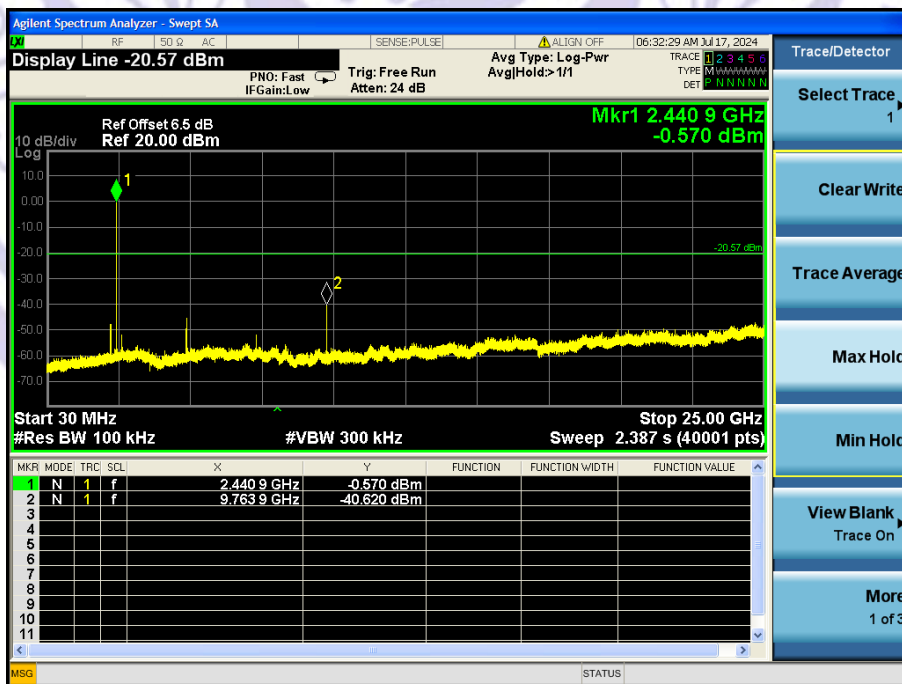


CH78

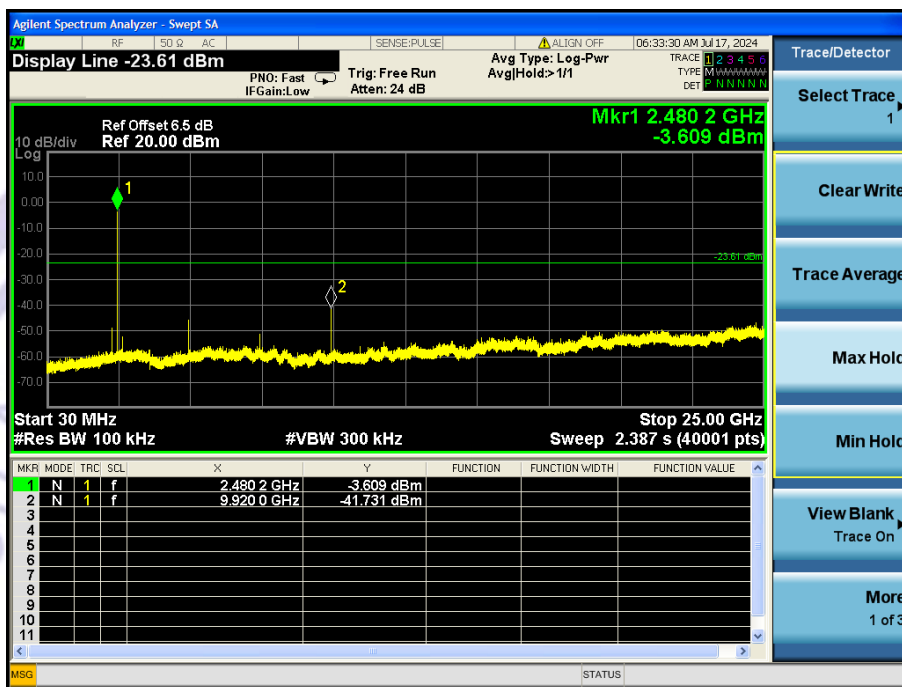


Right earphone

GFSK mode:


Data rate 1Mbps

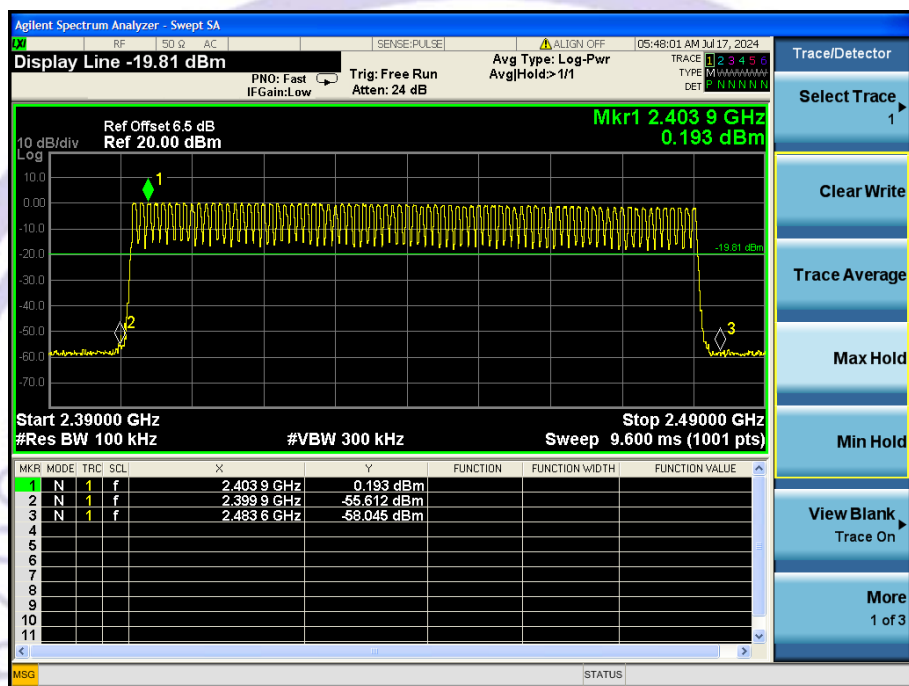


CH00 (Lower) Data rate 1Mbps

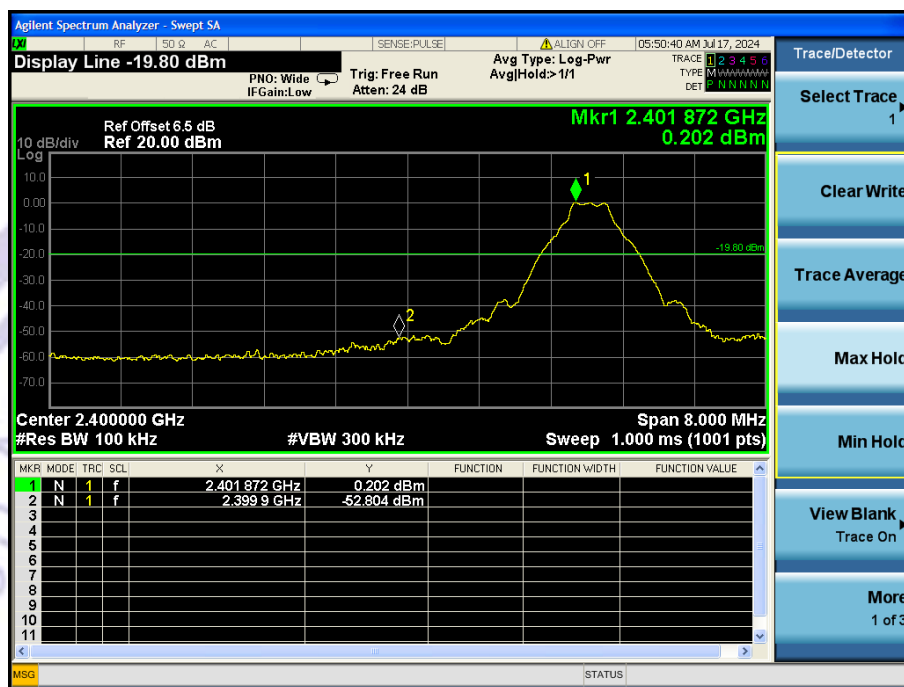


CH 78 (Upper) Data rate 1Mbps

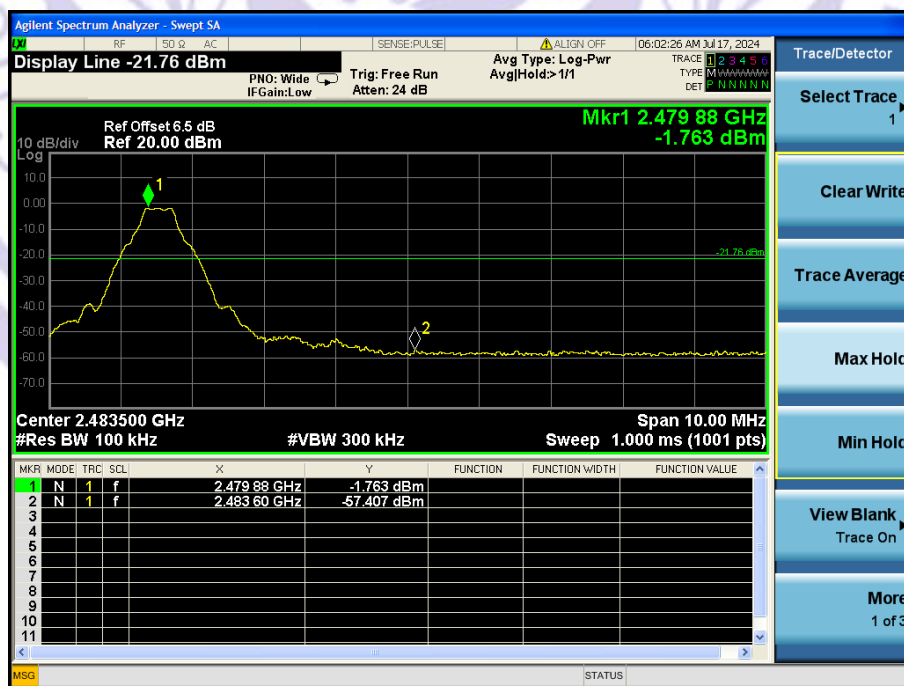


CH01

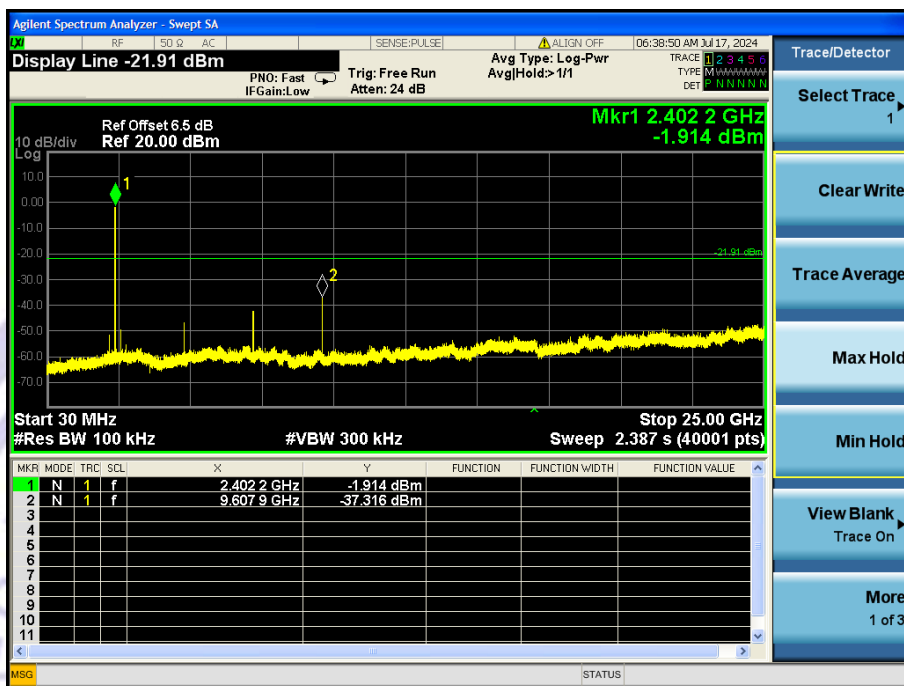

CH39

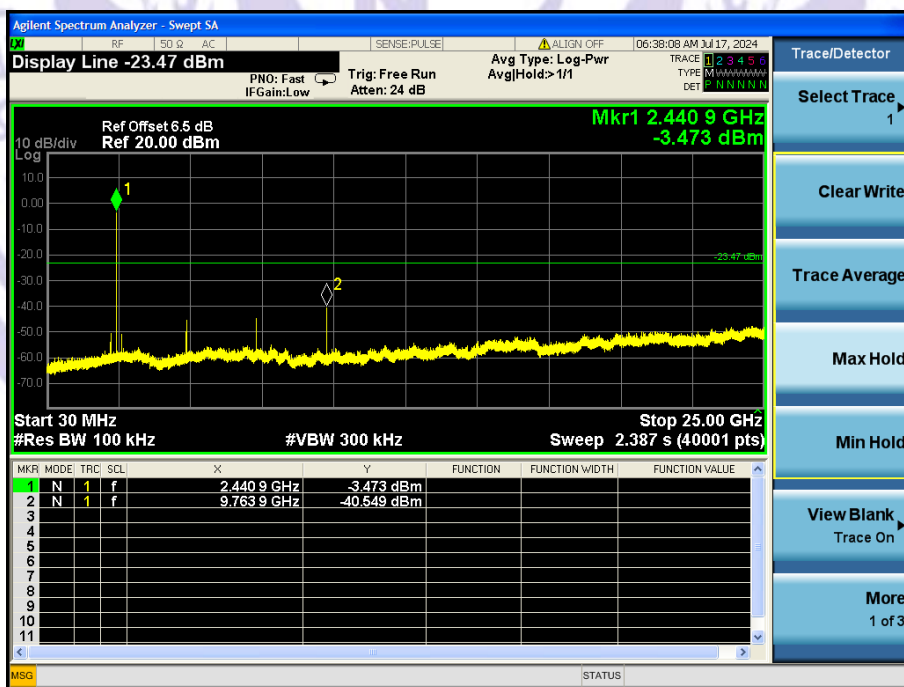


CH78

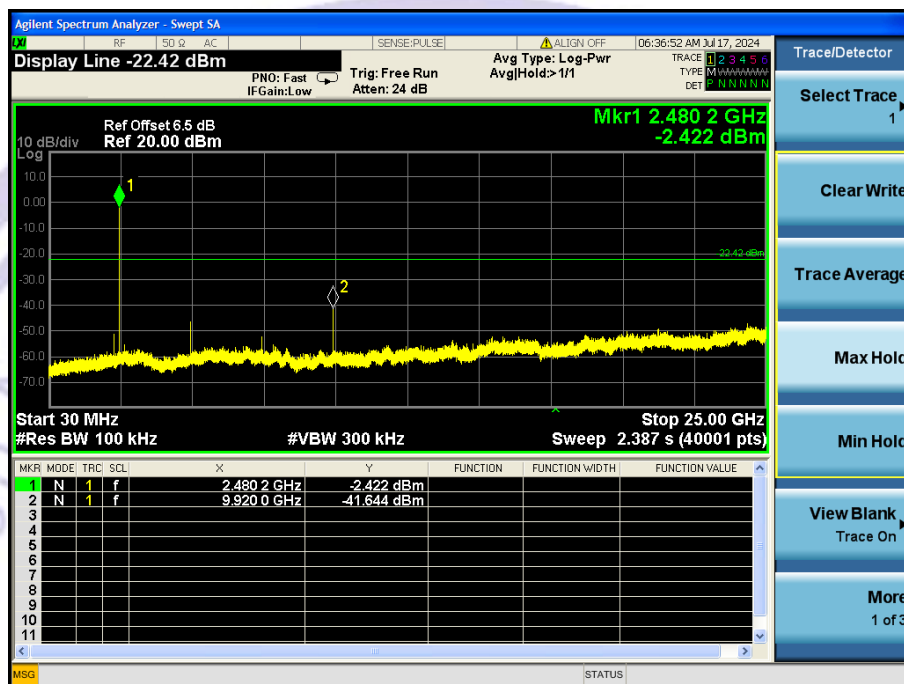


$\pi/4$ -DQPSK mode


Data rate 2Mbps

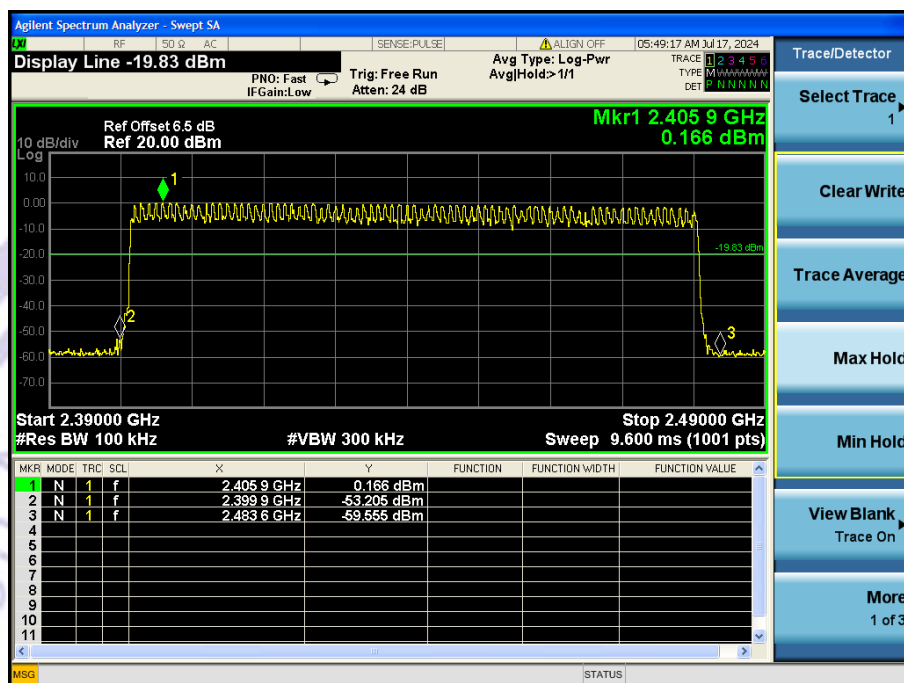


CH00 (Lower) Data rate 2Mbps

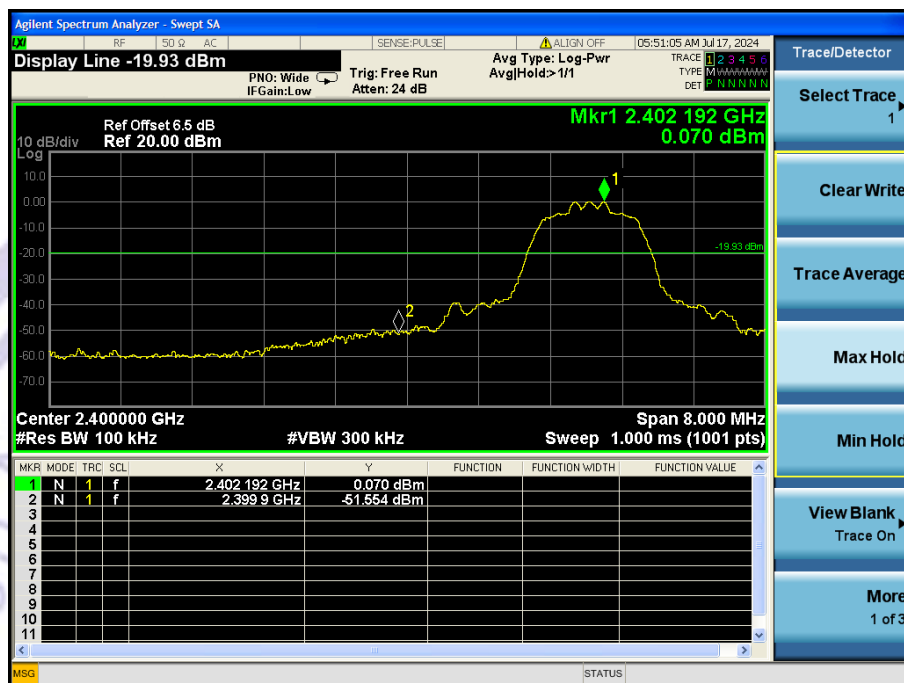


CH 78 (Upper) Data rate 2Mbps

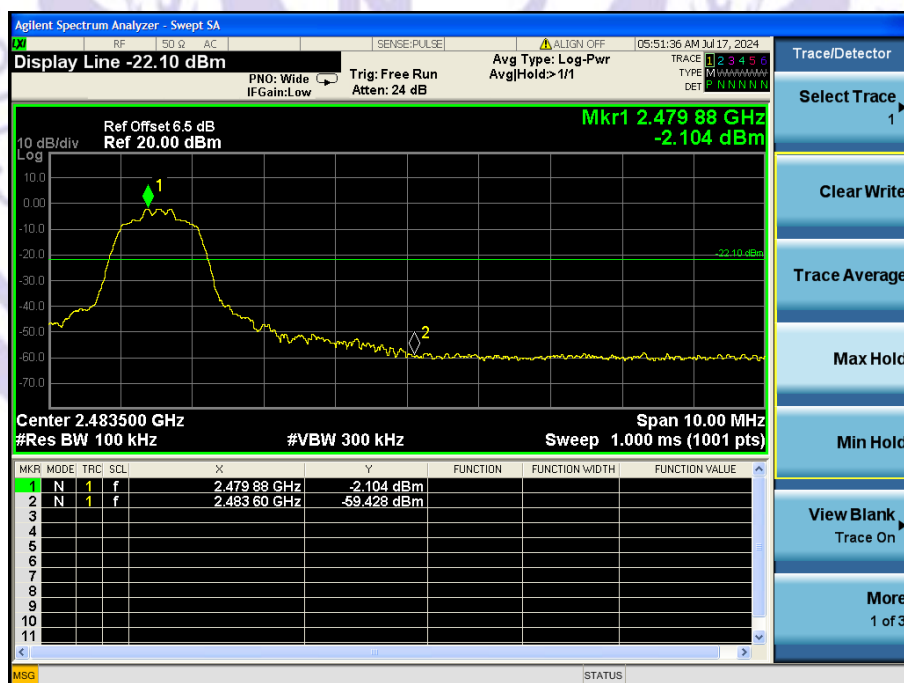


CH01

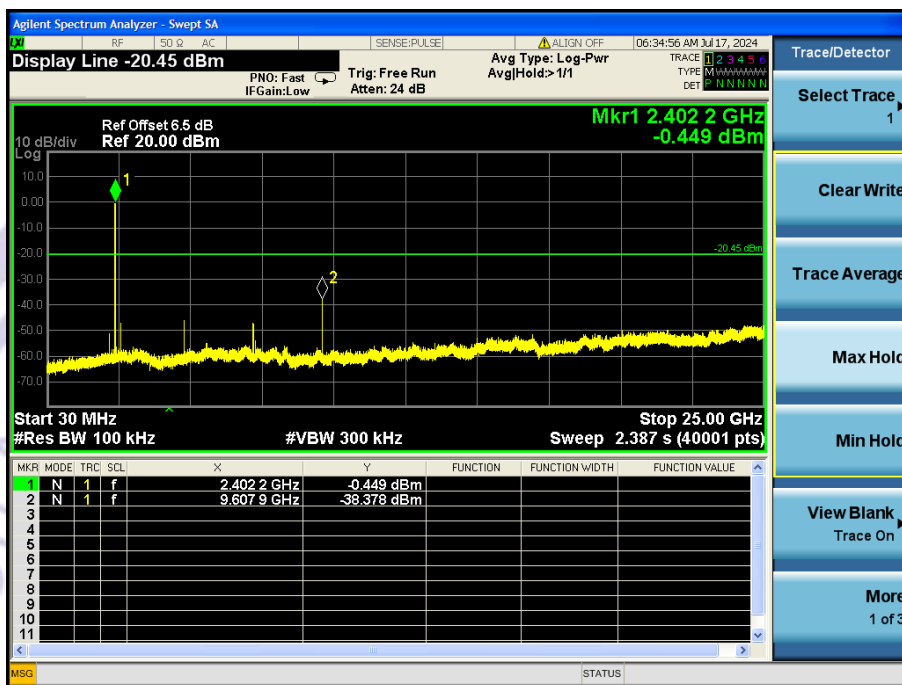

CH39

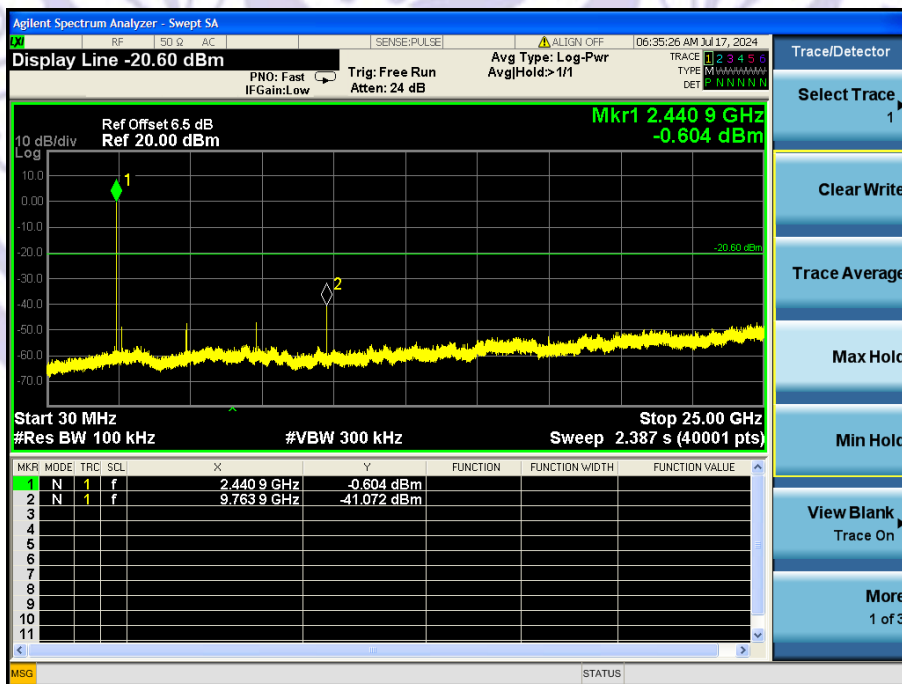


CH78

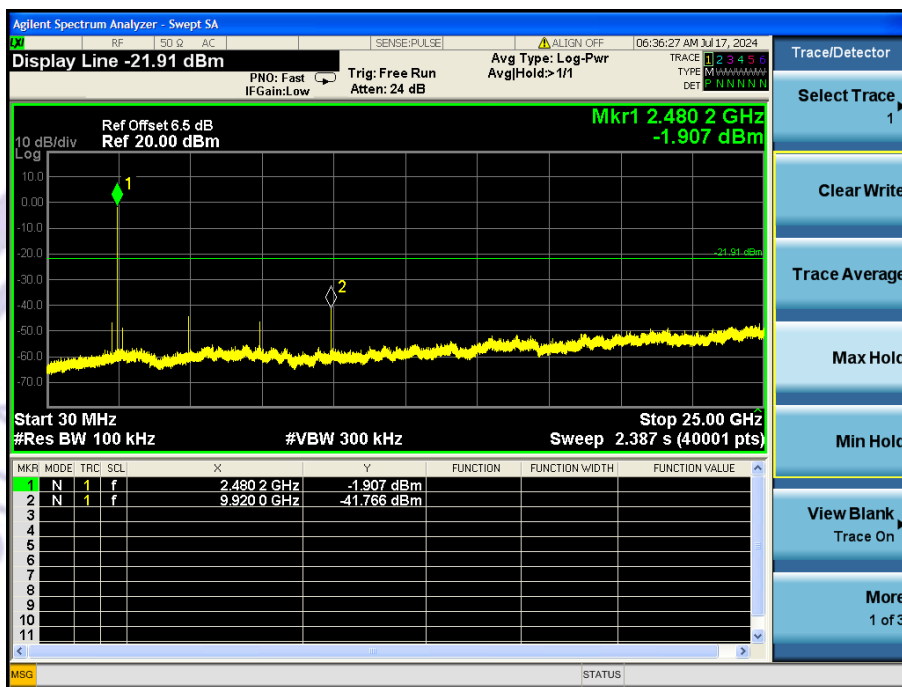


BLE Left earphone


CH00 (Lower)

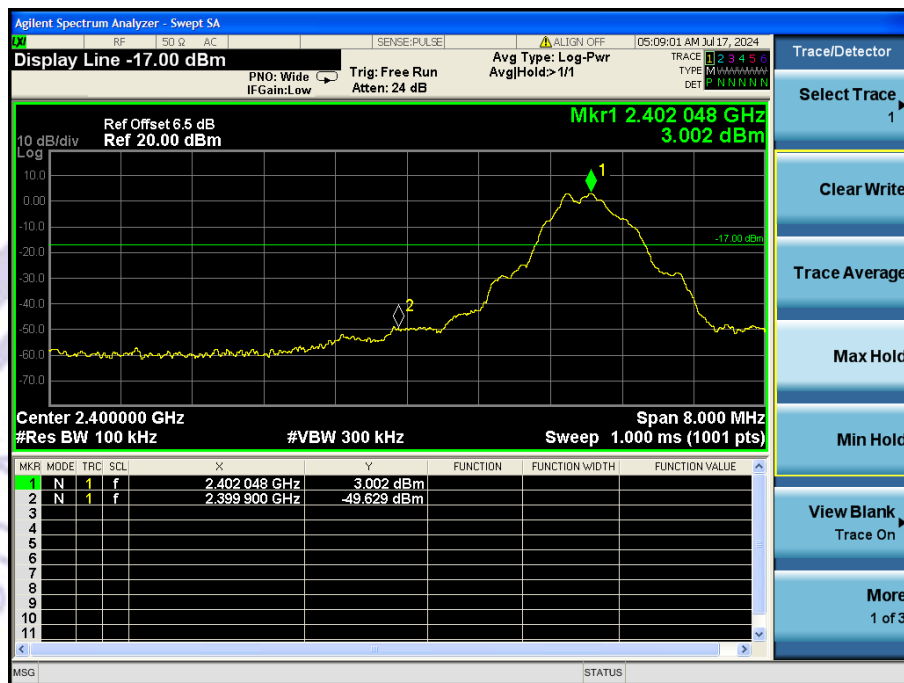


CH 39 (Upper)

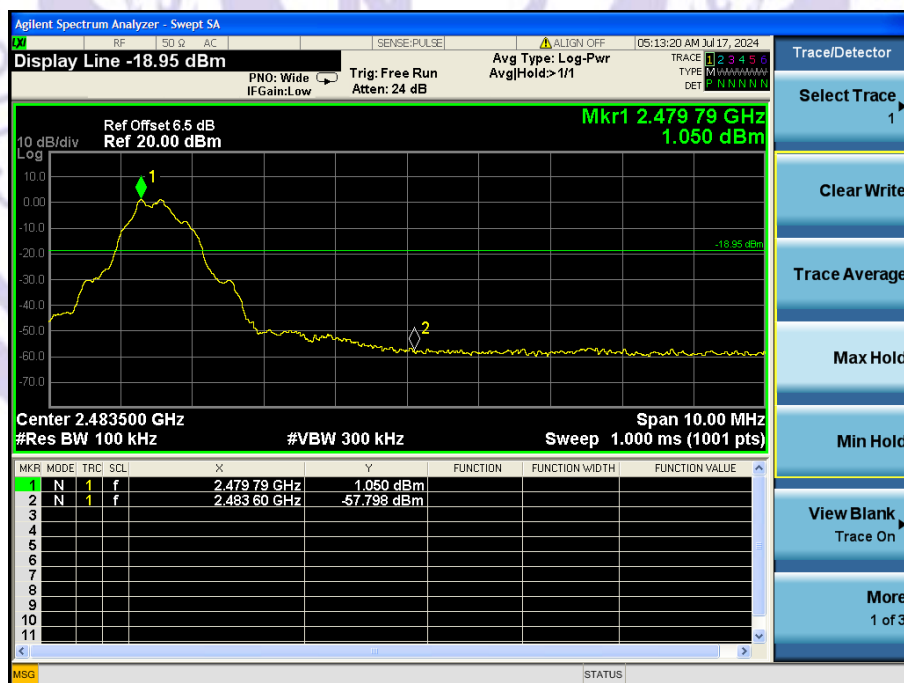


CH00

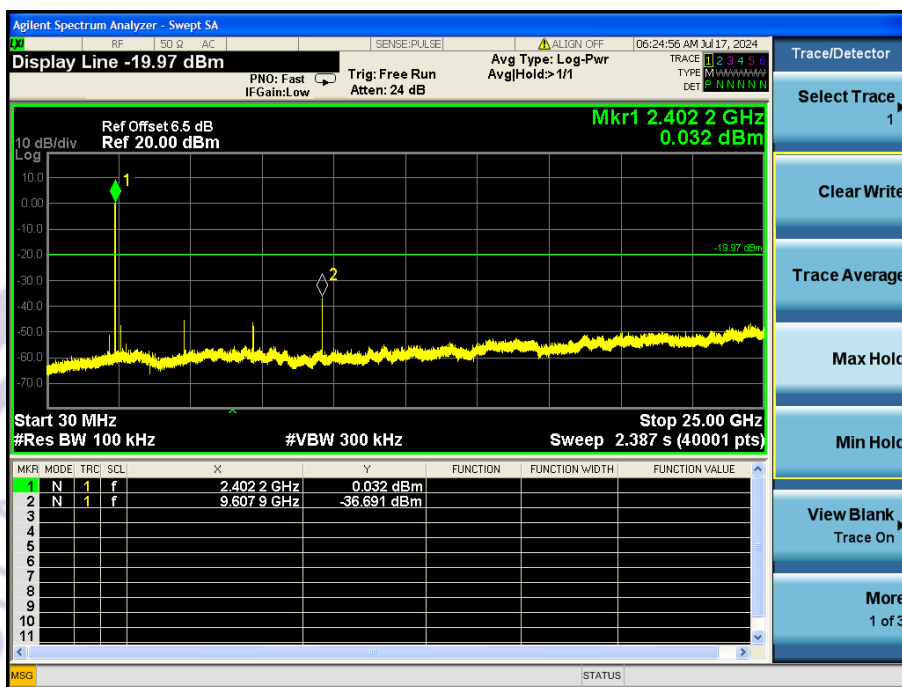

CH19

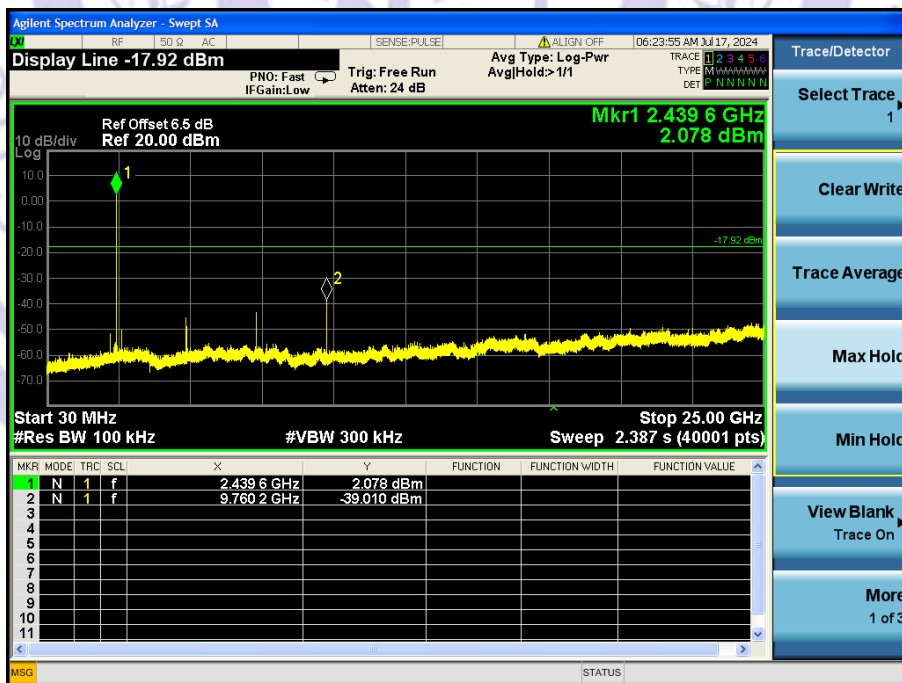


CH39

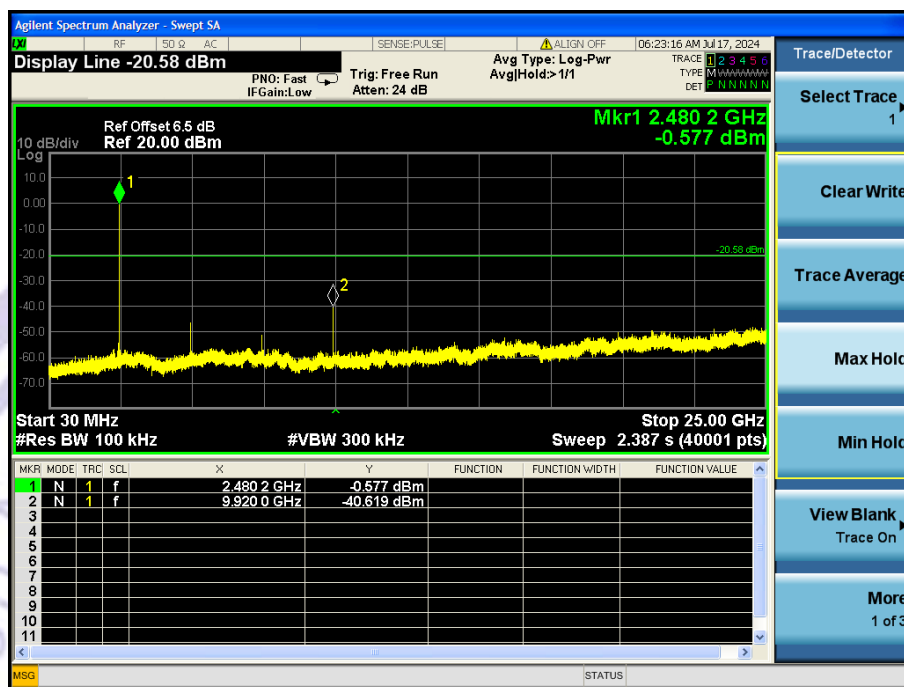


BLE Right earphone


CH00 (Lower)

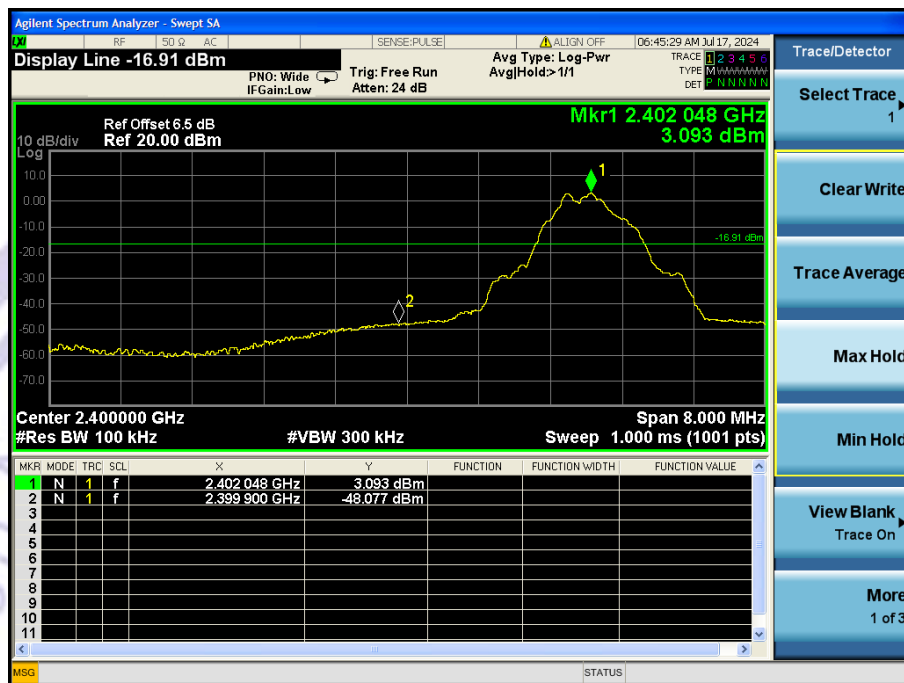


CH 39 (Upper)

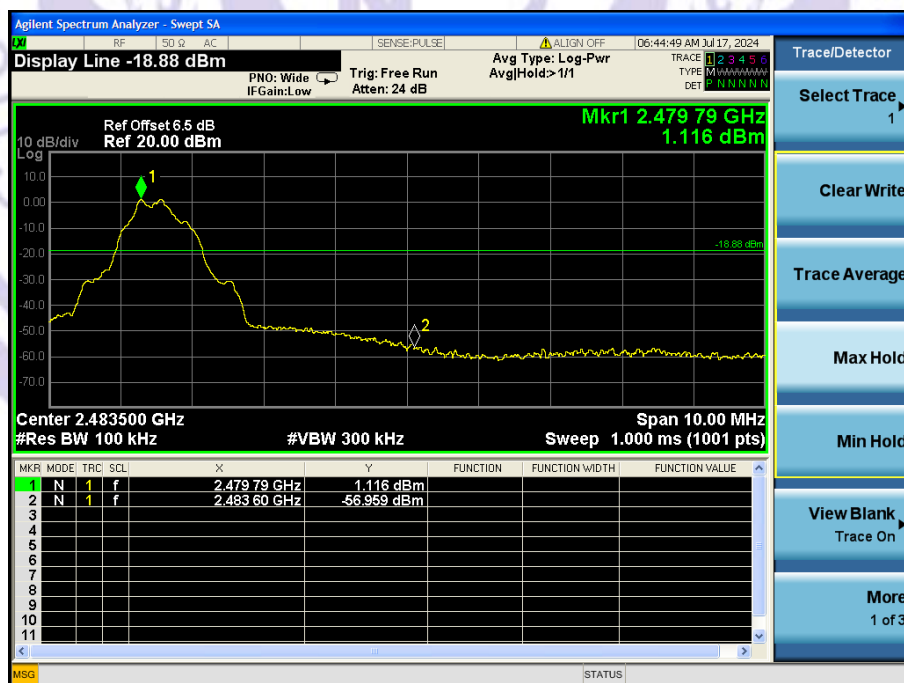


CH00

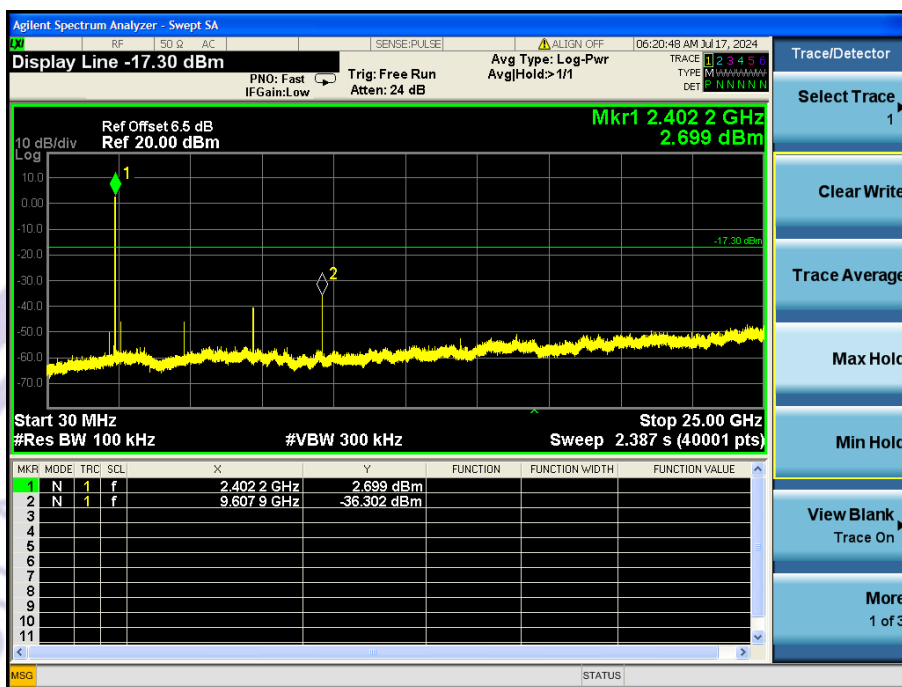

CH19

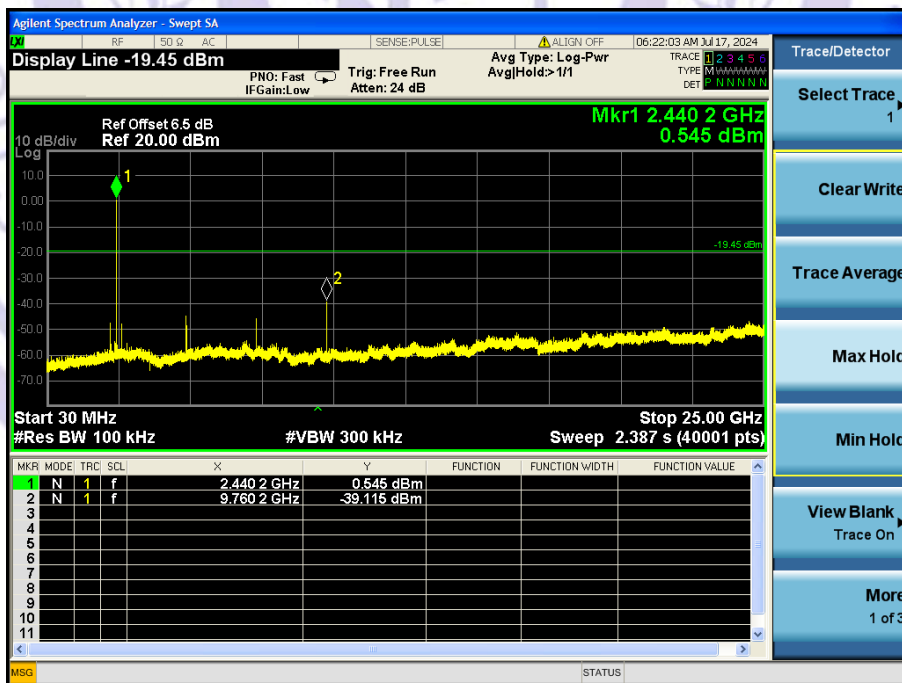

CH39

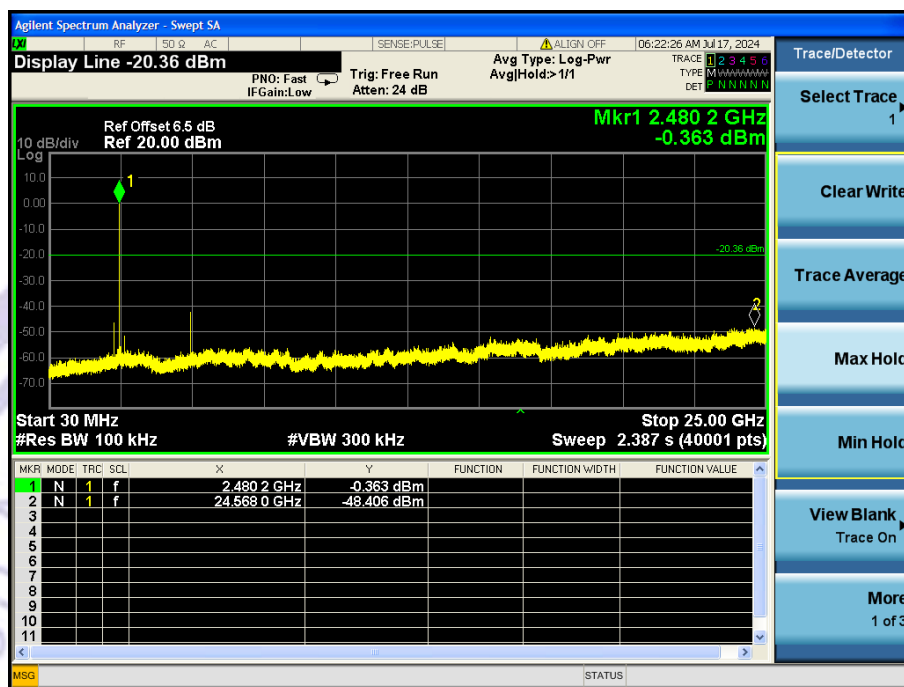

14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Connected Construction

The antenna is Ceramic Antenna which permanently attached, and the best case gain of the antenna is 3.12dBi. It complies with the standard requirement.

15 6dB Bandwidth Measurement(For Other than FHSS)

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

15.2 Test Result**Left earphone**

Test Mode	Test Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)
Mode 1	CH01	2402	542.8	≥ 500
	CH19	2440	521.7	≥ 500
	CH39	2480	517.6	≥ 500

CH00 2402MHz



CH19 2440MHz



CH39 2480MHz



Right earphone

Test Mode	Test Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)
Mode 1	CH01	2402	543.9	≥ 500
	CH19	2440	524.5	≥ 500
	CH39	2480	518.4	≥ 500

CH00 2402MHz



CH19 2440MHz



CH39 2480MHz



16 Maximum Peak Output Power(For Other than FHSS)

Test Requirement : FCC CFR47 Part 15 Section 15.247,
Test Method : ANSI C63.10:2013
Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

16.1 Test Procedure


1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

16.2 Test Result


Left earphone

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit(dBm)	Result
CH01	2402 MHz	3.032	30	PASS
CH19	2440MHz	2.371	30	PASS
CH39	2480 MHz	1.016	30	PASS


CH00 2402MHz

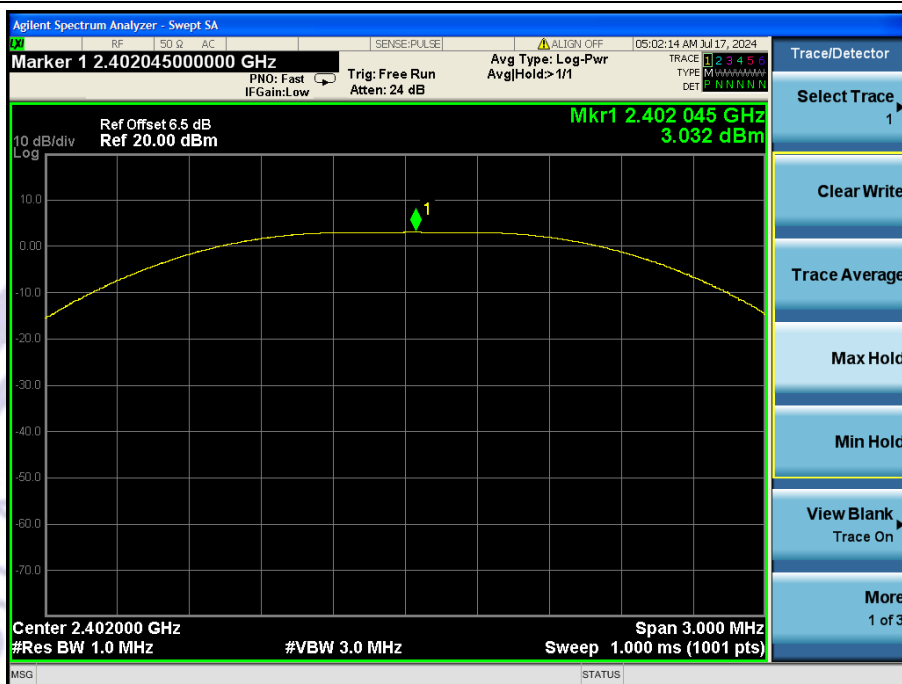

CH19 2440MHz

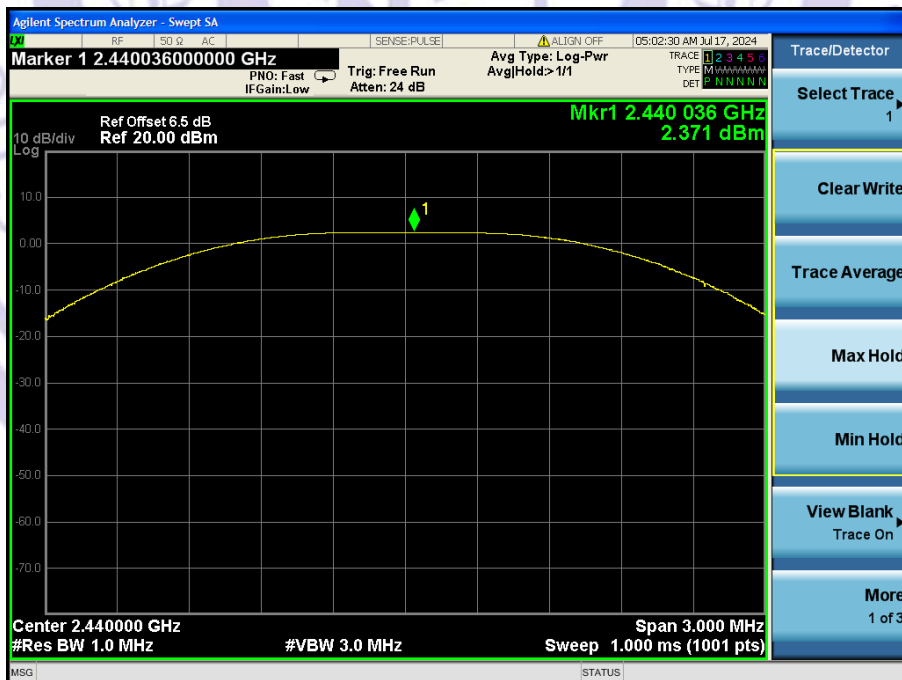


CH39 2480MHz

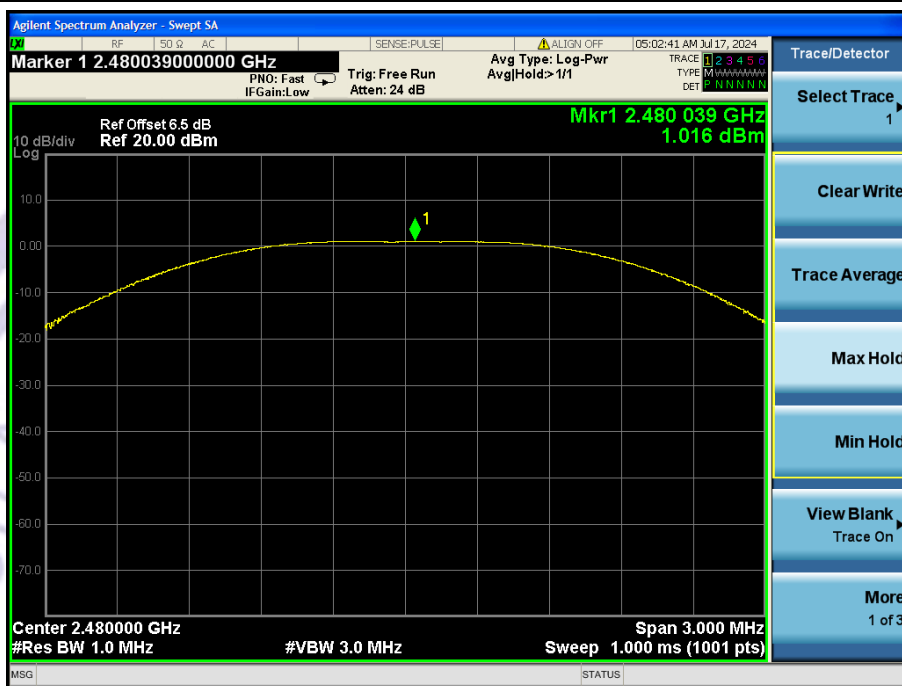


Right earphone


Test Channel	Frequency (MHz)	Output Power (dBm)	Limit(dBm)	Result
CH01	2402 MHz	3.103	30	PASS
CH19	2440MHz	2.438	30	PASS
CH39	2480 MHz	1.078	30	PASS

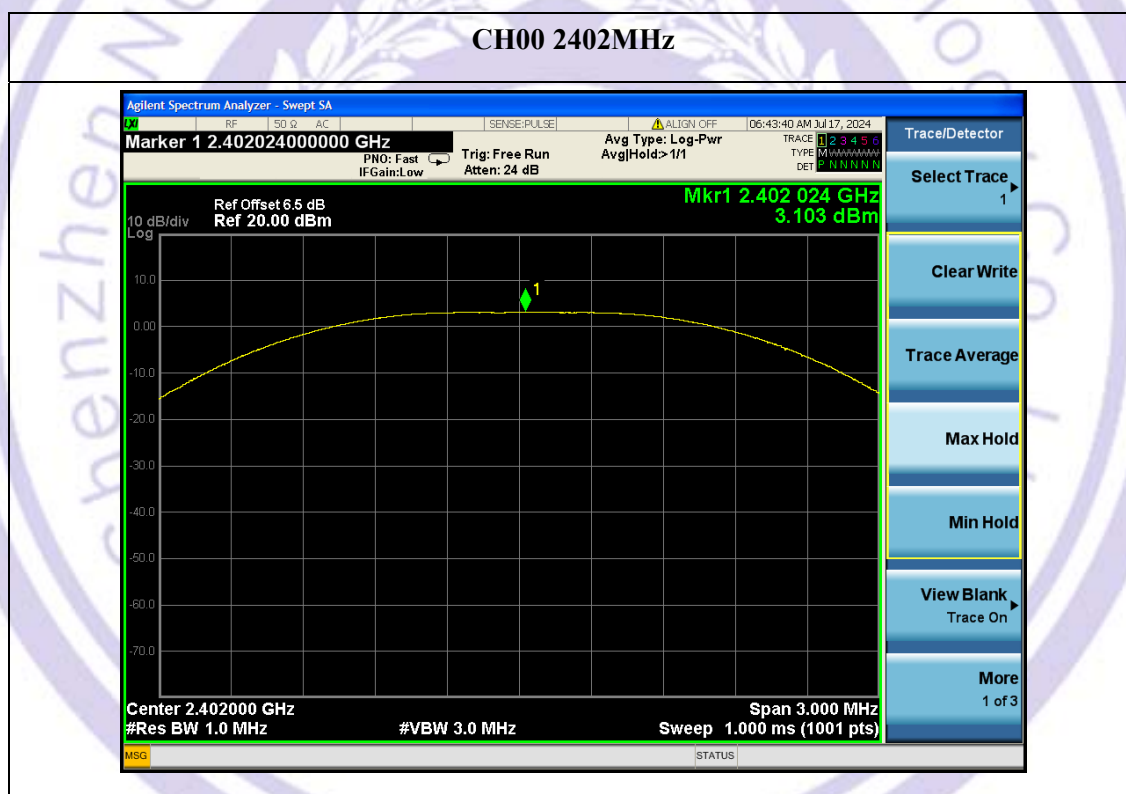

CH19 2440MHz

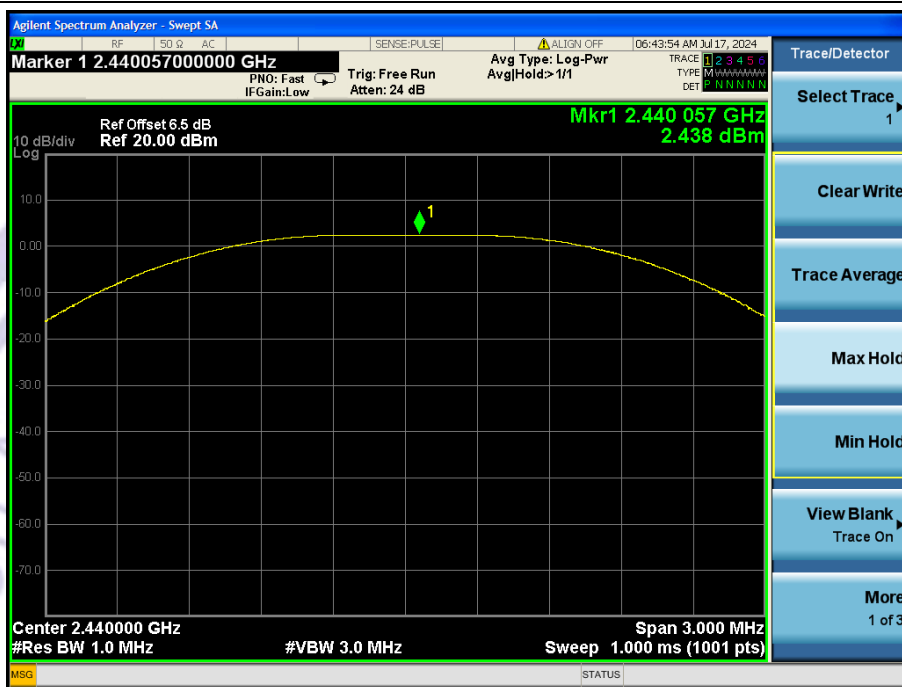

CH39 2480MHz

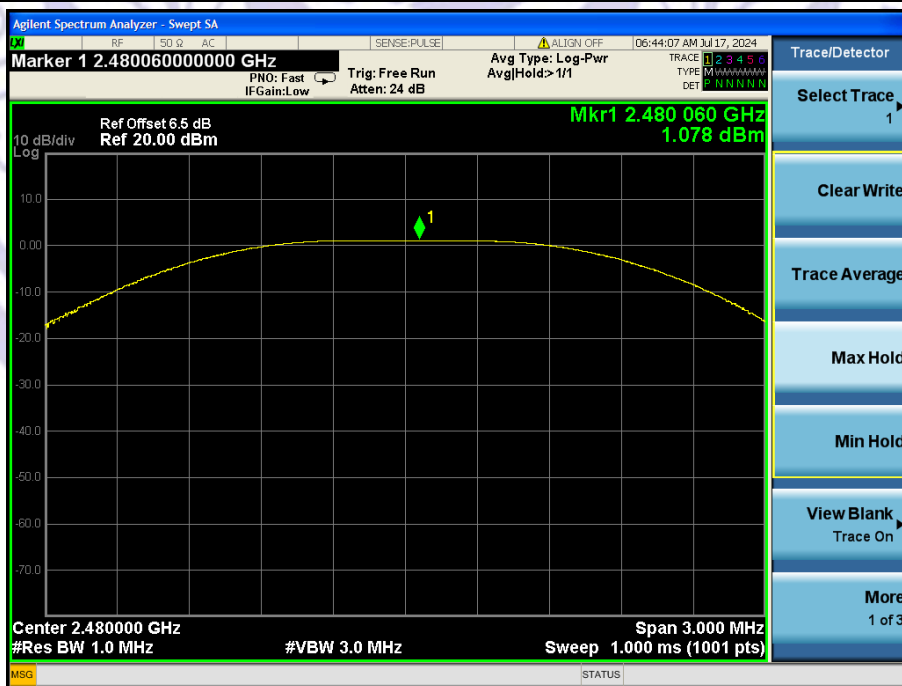

17 Power Spectral density(For Other than FHSS)

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

17.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

17.2 Test Result


Left earphone

Test Channel	Frequency(MHz)	Power Density(dBm)	LIMIT(dBm)
CH01	2402 MHz	-15.397	8.00
CH19	2440 MHz	-17.428	8.00
CH39	2480 MHz	-18.689	8.00


CH00 2402MHz

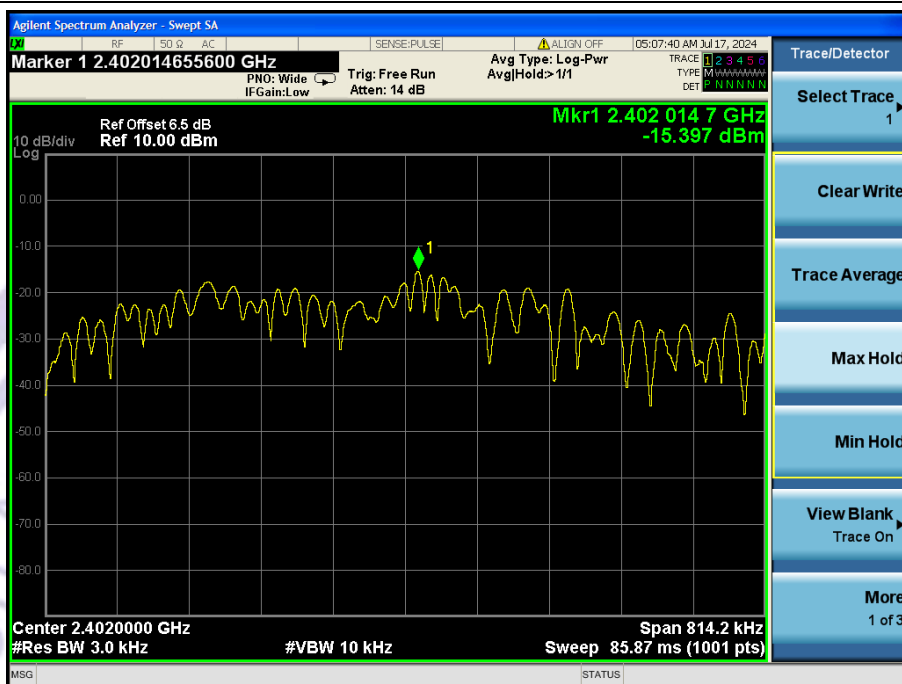

CH19 2440MHz

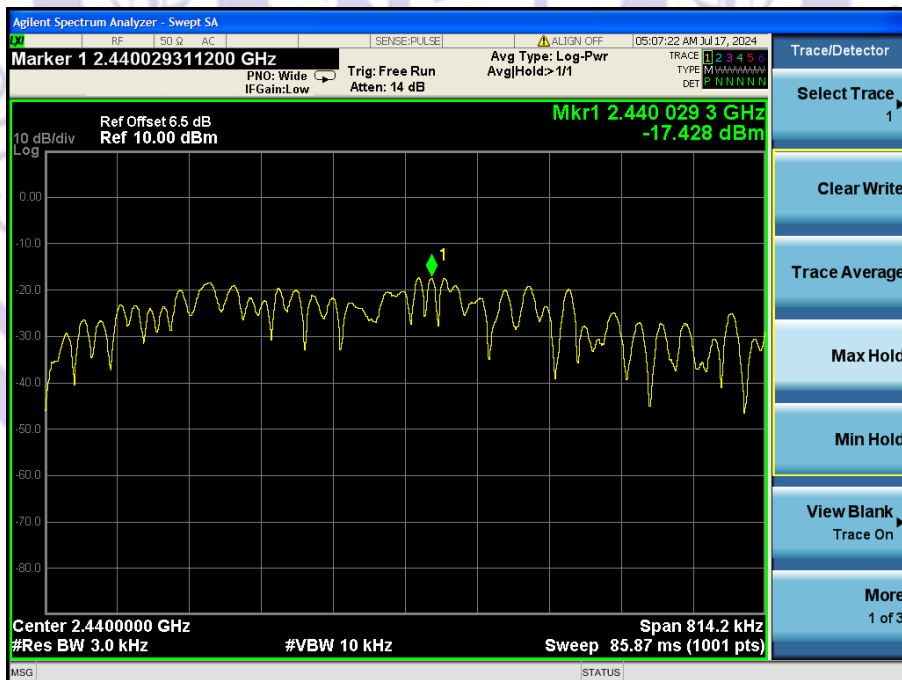


CH39 2480MHz

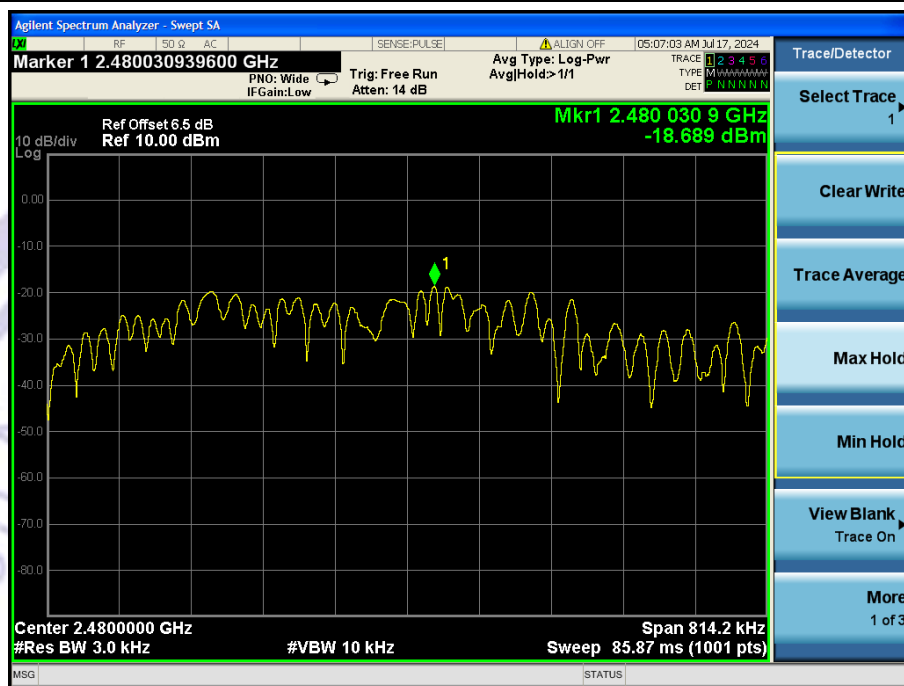


Right earphone

Test Channel	Frequency(MHz)	Power Density(dBm)	LIMIT(dBm)
CH01	2402 MHz	-15.275	8.00
CH19	2440 MHz	-17.281	8.00
CH39	2480 MHz	-18.623	8.00


CH00 2402MHz

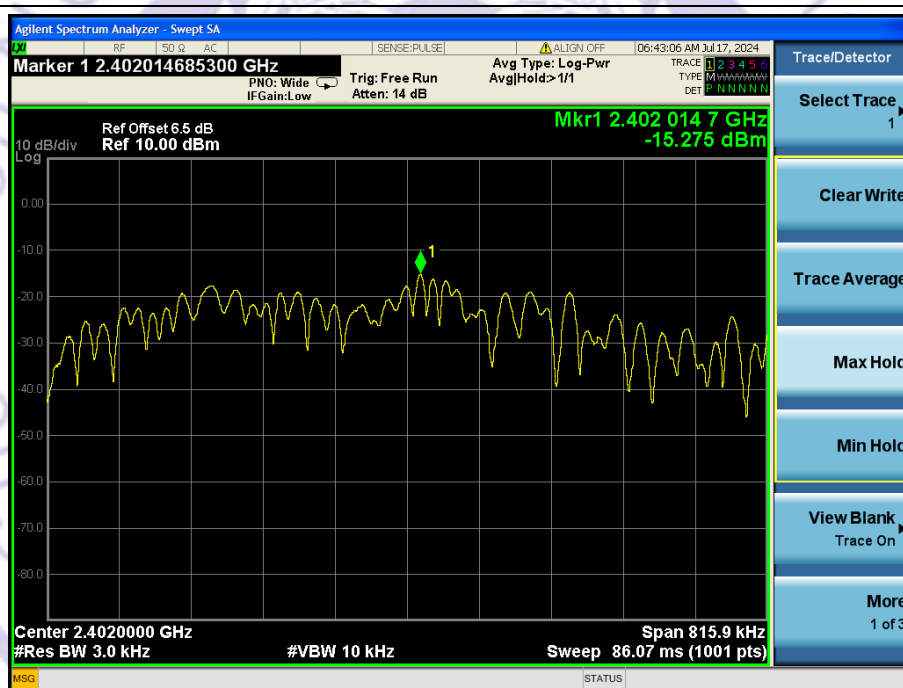

CH19 2440MHz

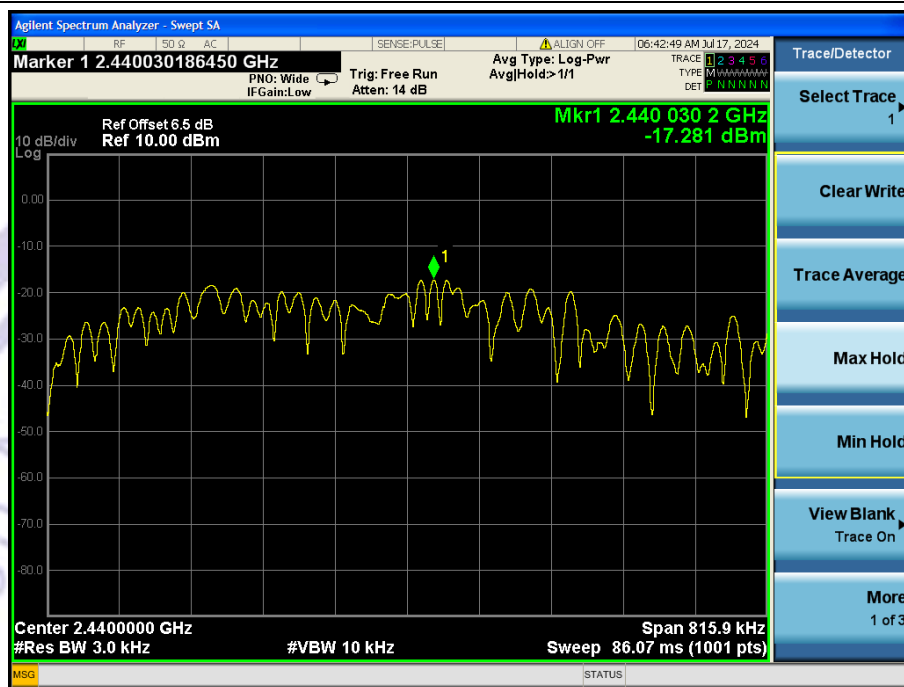

CH39 2480MHz

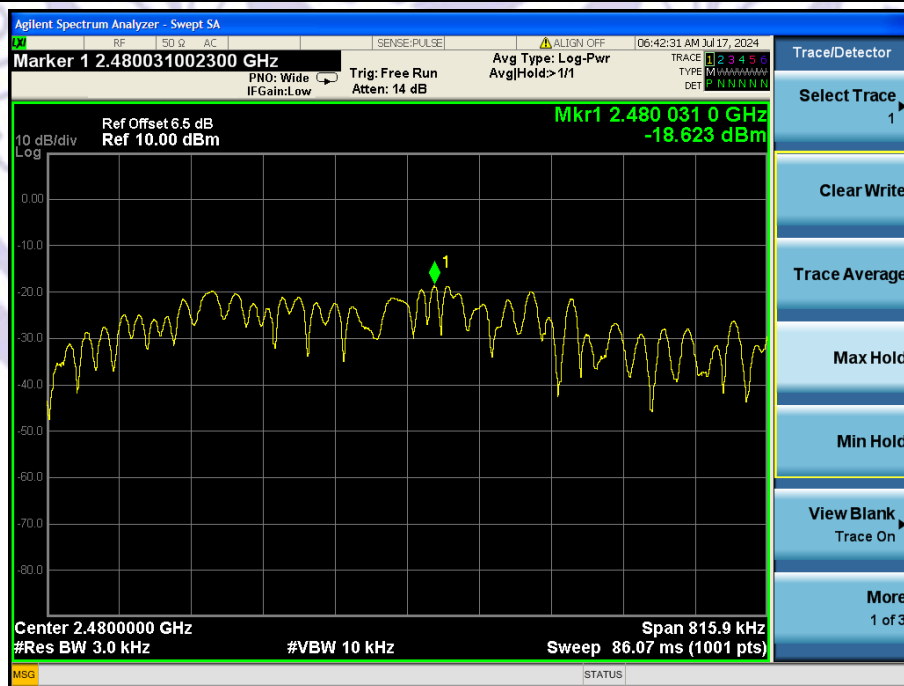

18 TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

