

Test Report

Verified code: 463096

Report No.: E20240624383901-1

Customer: Qingdao YiGoal Technology Co.,Limited

Address: Qingdao City, Shibei District, Tailiu Road, No. 280, Vanke City, Toronto Block,
Building 4, Unit 203. China

Sample Name: Bluetooth module

Sample Model: HT288

Receive Sample Date: Jun.27,2024

Test Date: Jul.03,2024 ~ Jul.11,2024

Reference Document: 47 CFR, FCC Part 15 Subpart C
RADIO FREQUENCY DEVICES:Subpart C—Intentional Radiators

Test Result: Pass

Prepared by: Wen Wenwen
Wen Wenwen

Reviewed by: Wu Haoting
Wu Haoting

Approved by: Xiao Liang
Xiao Liang

GRG METROLOGY & TEST GROUP CO., LTD.

Issued Date: 2024-08-29

GRG METROLOGY & TEST GROUP CO., LTD.

Address: No.163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, China
Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. This testing report is only for scientific research, teaching, internal quality control, etc.

——Blank space below this page——

TABLE OF CONTENTS

1.	TEST RESULT SUMMARY	6
2.	GENERAL DESCRIPTION OF EUT.....	7
2.1	APPLICANT	7
2.2	MANUFACTURER.....	7
2.3	FACTORY	7
2.4	BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	7
2.5	CHANNELLIST	8
2.6	TEST OPERATION MODE	8
2.7	LOCAL SUPPORTIVE	8
2.8	CONFIGURATION OF SYSTEM UNDER TEST	8
2.9	DUTY CYCLE.....	9
3.	LABORATORY AND ACCREDITATIONS	10
3.1	LABORATORY.....	10
3.2	ACCREDITATIONS	10
4.	MEASUREMENT UNCERTAINTY	11
5.	LIST OF USED TEST EQUIPMENT AT GRGT	12
6.	RADIATED SPURIOUS EMISSIONS	13
6.1	LIMITS.....	13
6.2	TEST PROCEDURES	13
6.3	TEST SETUP	16
6.4	DATA SAMPLE	18
6.5	TEST RESULTS	19
7.	6dB BANDWIDTH.....	29
7.1	LIMITS.....	29
7.2	TEST PROCEDURES	29
7.3	TEST SETUP	29
7.4	TEST RESULTS	29
8.	MAXIMUM PEAK OUTPUT POWER	33
8.1	LIMITS.....	33
8.2	TEST PROCEDURES	33
8.3	TEST SETUP	33
8.4	TEST RESULTS	33
9.	POWER SPECTRAL DENSITY	34
9.1	LIMITS.....	34
9.2	TEST PROCEDURES	34
9.3	TEST SETUP	34
9.4	TEST RESULTS	35
10.	CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS	39
10.1	LIMITS.....	39
10.2	TEST PROCEDURES	39
10.3	TEST SETUP	39

10.4 TEST RESULTS 39

11. RESTRICTED BANDS OF OPERATION 52

11.1 LIMITS 52

11.2 TEST PROCEDURES 53

11.3 TEST SETUP 53

11.4 TEST RESULTS 54

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM 63

APPENDIX B. PHOTOGRAPH OF THE EUT 63

—Blank space below this page—

REPORT ISSUED HISTORY

Report Version	Report No.	Description	Compile Date
1.0	E20240624383901-1	Original Issue	2024-07-25

Blank space below this page

1. TEST RESULT SUMMARY

Technical Requirements		
47 CFR, FCC Part 15 Subpart C 15.247 ANSI C63.10-2020 KDB 558074 D01 15.247 measurement guidance v05r02		
Limit / Severity	Item	Result
§15.203	Antenna Requirement	Pass ¹⁾
§15.207(a)	Conducted Emission	N/A ²⁾
§15.247(d)&15.205& 15.209	Radiated Spurious Emission	Pass
§15.247(b)(3)	Maximum Peak Output Power	Pass
§15.247(e)	Power Spectral Density	Pass
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(d)	Conducted band edges and Spurious Emission	Pass
§15.247(d)&15.205& 15.209	Restricted bands of operation	Pass

Note:

- 1) The antenna is PCB printed antenna. The max gain of antenna is -2.31dBi, which accordance 15.203, is considered sufficient to comply with the provisions of this section.
- 2) Test is not applicable to this Equipment. This EUT is no AC mains power ports.

——Blank space below this page——

2. GENERAL DESCRIPTION OF EUT

2.1 APPLICANT

Name: Qingdao YiGoal Technology Co.,Limited
Address: Qingdao City, Shibei District, Tailiu Road, No. 280, Vanke City, Toronto
Block, Building 4, Unit 203. China

2.2 MANUFACTURER

Name: Qingdao YiGoal Technology Co.,Limited
Address: Qingdao City, Shibei District, Tailiu Road, No. 280, Vanke City, Toronto
Block, Building 4, Unit 203. China

2.3 FACTORY

Name : Guangdong Bestcore Internet of Things Technology Co.,Ltd
Address : Room 1501, 15F, ShuMao Building, 6 Xiangxing Road, Torch Development
District ,Zhongshan

2.4 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment: Bluetooth module
Model No.: HT288
Additional Model: HT228, HT227
Models Difference descriptions: They have the same technical construction including circuit diagram, PCB LAYOUT, hardware version and software version identical, except sales area are different.
Trade Mark: Yigoal
FCC ID: 2BHMW-HT288
Power supply: DC 3.3V
Frequency Band: 2402MHz-2480MHz
Maximum conducted output Power: 4.37dBm
Modulation type: GFSK
Channel space: 2MHz
Antenna Specification: PCB printed antenna with -2.31dBi gain (Max.)
Temperature Range: -40℃ ~ +85℃
Hardware Version: 1.0
Software Version: 1.0
Sample No: E20240624383901-0001, E20240624383901-0004

Note :

The EUT antenna gain is provided by the applicant. This report is made solely on the basis of such data and/or information. We accept no responsibility for the authenticity and completeness of the above data and information and the validity of the results and/or conclusions.

2.5 CHANNELIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	*19	2440	29	2460	*39	2480

* is the test frequency

2.6 TEST OPERATION MODE

Mode No.	Description of the modes
1	Bluetooth (BLE) fixed frequency transmitting


2.7 LOCAL SUPPORTIVE

No.	Name of Equipment	Manufacturer	Model	Serial Number	Note
A	Notebook	LENOVO	TianYi 310-14ISK	MP18DLC6	1#
B	Test board	/	/	/	/

No.	Cable Type	Qty.	Shielded Type	Ferrite Core(Qty.)	Length
1	Serial cable	1	No	0	0.1 m
2	USB cable	1	No	0	0.3m

Note: The notebook is just used to produce fixed frequency transmitting.

2.8 CONFIGURATION OF SYSTEM UNDER TEST



Test software:

Software version	Test level
rf_certi_tool_v13	default


2.9 DUTY CYCLE

Environment: 24.5°C/45%RH/101.0kPa
Tested By: Qin tingting


Voltage: DC 3.3V
Date: 2024-07-03

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	DC [%]	T [s]
BLE_1M	Ant1	2402	15	15	100	0.015
BLE_2M	Ant1	2402	15	15	100	0.015

BLE_1M_2402MHz

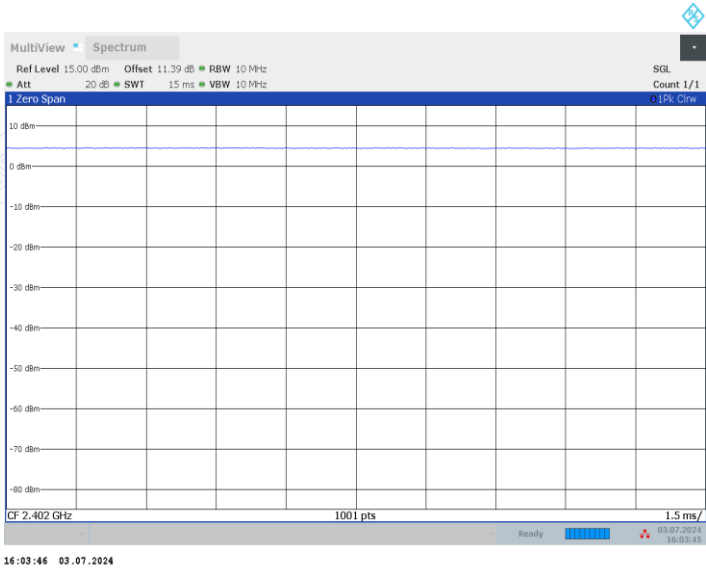

BLE_2M_2402MHz

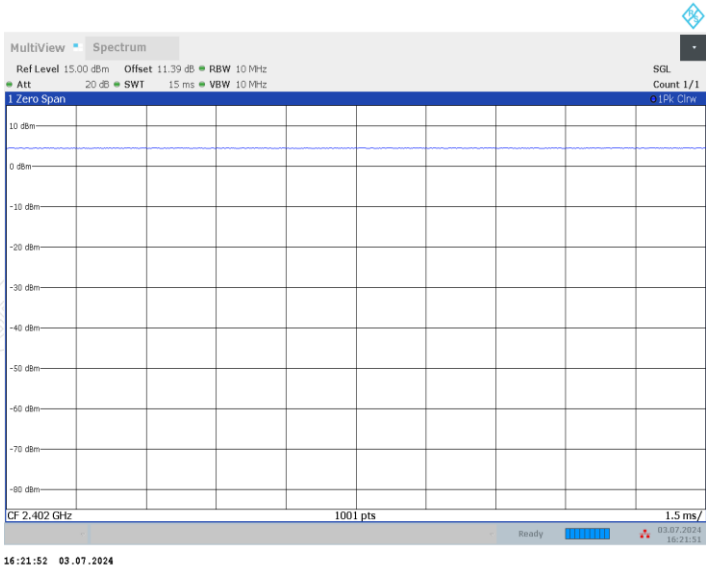

3. LABORATORY AND ACCREDITATIONS

3.1 LABORATORY

The tests & measurements refer to this report were performed by Shenzhen EMC Laboratory of GRG METROLOGY & TEST GROUP CO., LTD.

Add.: No.1301 Guangang Road Xinlan Community, Guanlan Street, Longhua District
Shenzhen, 518110, People's Republic of China

P.C.: 518110

Tel : 0755-61180008

Fax: 0755-61180008

3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA A2LA(Certificate #2861.01)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada ISED (Company Number: 24897, CAB identifier:CN0069)

USA FCC (Registration Number: 759402, Designation Number:CN1198)

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.grgtest.com>

——Blank space below this page——

4. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	X	9kHz~30MHz	4.4dB ¹⁾
	Y	9kHz~30MHz	4.4dB ¹⁾
	Z	9kHz~30MHz	4.4dB ¹⁾
	Horizontal	30MHz~200MHz	4.6dB ¹⁾
		200MHz~1000MHz	4.8dB ¹⁾
		1GHz~18GHz	5.0dB ¹⁾
		18GHz~26.5GHz	5.2dB ¹⁾
	Vertical	30MHz~200MHz	4.7dB ¹⁾
		200MHz~1000MHz	4.7dB ¹⁾
		1GHz~18GHz	5.1dB ¹⁾
		18GHz~26.5GHz	5.4dB ¹⁾

Measurement	Uncertainty
RF frequency	6.0×10^{-6}
RF power conducted	0.80dB
Power spectral density conducted	0.80dB
Occupied channel bandwidth	0.40dB
Unwanted emission, conducted	0.70dB
Humidity	6.0%
Temperature	2.0°C

Note:

¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95%.
This uncertainty represents an expanded uncertainty factor of $k=2$.

5. LIST OF USED TEST EQUIPMENT AT GRGT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Radiated Spurious Emission & Restricted bands of operation				
Test S/W	EZ	CCS-03A1		
Loop Antenna	Schwarzbeck	FMZB 1513-60	1513-60-56	2025-05-07
Preamplifier	SHIRONG ELECTRONIC	DLNA-30M1G-G40	20200928001	2025-01-30
Bi-log Antenna	Schwarzbeck	VULB9160	VULB9160-3402	2024-10-06
Horn Antenna	Schwarzbeck	BBHA 9120D	02143	2024-09-23
Test Receiver	R&S	ESR26	101758	2024-09-22
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-497	2024-09-18
Amplifier	Tonscend	TAP01018048	AP20E8060075	2025-03-01
Amplifier	Tonscend	TAP184050	AP20E806071	2025-03-01
Amplifier	SHIRONG ELECTRONIC	DLNA-1G18G-G40	20200928005	2024-08-17
Test S/W	Tonscend	JS36-RE/2.5.1.5		
6dB Bandwidth&Conducted band edges and Spurious Emission&Power Spectral Density				
Spectrum Analyzer	R&S	FSW43	102072	2024-07-09
Automatic control unit	TONSCEND	JS0806-2	21B8060365	2024-08-04
BT/WIFI System	Tonscend	JS1120-3		
Maximum peak output power				
Pulse power sensor	Anristu	MA2411B	1126150	2025-01-11
Power meter	Anristu	ML2495A	1204003	2025-01-11

Note: The calibration cycle of the above instruments is 12 months.

6. RADIATED SPURIOUS EMISSIONS

6.1 LIMITS

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required.

Frequency (MHz)	Quasi-peak($\mu\text{V/m}$)	Measurement distance(m)	Quasi-peak(dB $\mu\text{V/m}$)@distance 3m
0.009-0.490	2400/F(kHz)	300	128.5~93.8
0.490-1.705	24000/F(kHz)	30	73.8~63
1.705-30.0	30	30	69.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54

NOTE:

- (1) The emission limits for the ranges 9-90kHz and 110-490kHz are based on measurements employing a linear average detector.
- (2) The lower limit shall apply at the transition frequencies.
- (3) Above 18GHz test distance is 1m, so the Peak Limit=74+20*log(3/1)=83.54 (dB $\mu\text{V/m}$).
The Avg Limit=54+20*log(3/1)=63.54 (dB $\mu\text{V/m}$).

6.2 TEST PROCEDURES

a) Sequence of testing 9kHz to 30MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 ° to 360 °.
- The antenna height is 1.0 meter.
- The antenna is polarized X,Y and Z.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the pre measurement the software maximizes by rotating the turntable

position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

b) Sequence of testing 30MHz to 1GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0 ° to 360 °.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 4 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of pre measurement the software maximize the peaks by changing turntable rotates from 0 ° to 360 ° and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

c) Sequence of testing 1GHz to 18GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 °to 360 °.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of pre measurement the software maximize the peaks by changing turntable rotates from 0 °to 360 °and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

d) Sequence of testing above 18GHz**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Pre measurement:



- The turntable rotates from 0 °to 360 °.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of pre measurement the software maximize the peaks by changing turntable rotates from 0 °to 360 °and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

NOTE:

- (1).The frequency from 9kHz to 150kHz, Set RBW=300Hz(for Peak&AVG), VBW=300Hz(for Peak&AVG). The frequency from 150kHz to 30MHz, Set RBW=9kHz, VBW=9kHz, (for QP Detector).
- (2).The frequency from 30MHz to 1GHz, Set RBW=120kHz, VBW=300kHz, (for QP Detector).
- (3).The frequency above 1GHz, for Peak detector: Set RBW=1MHz,VBW=3MHz.
- (4). The frequency above 1GHz, for Avg detector: Set RBW=1MHz,if the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e.,10kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$, Where T is defined in section 2.9.

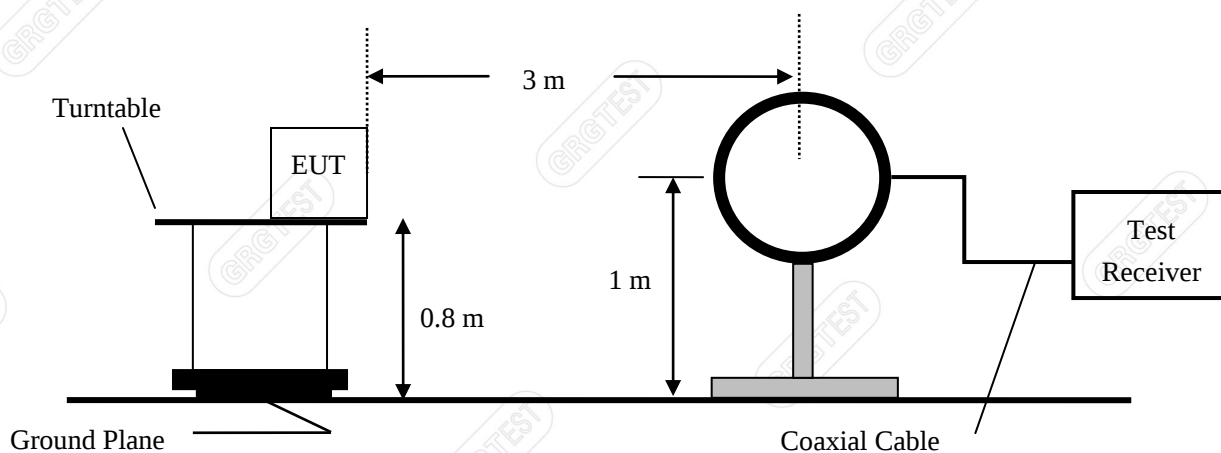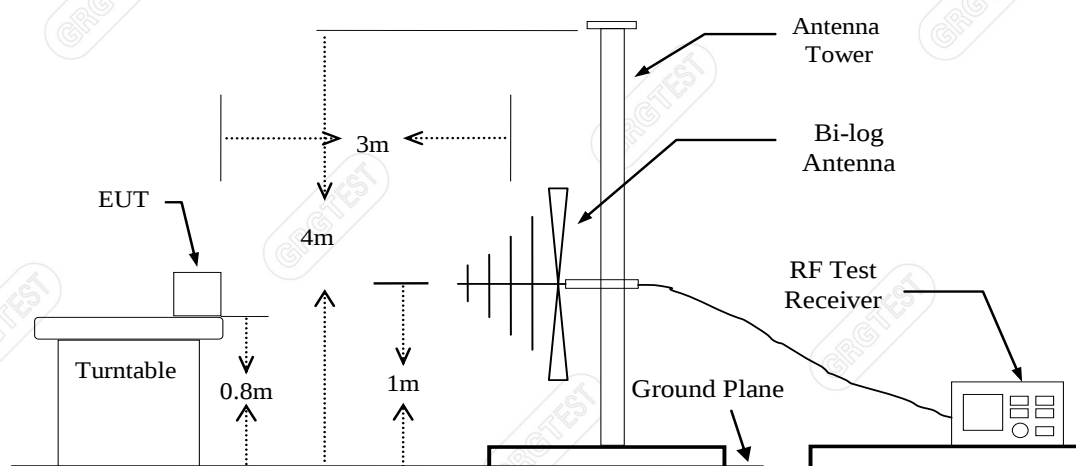6.3 TEST SETUP**Figure 1. 9kHz to 30MHz radiated emissions test configuration****Figure 2. 30MHz to 1GHz radiated emissions test configuration**

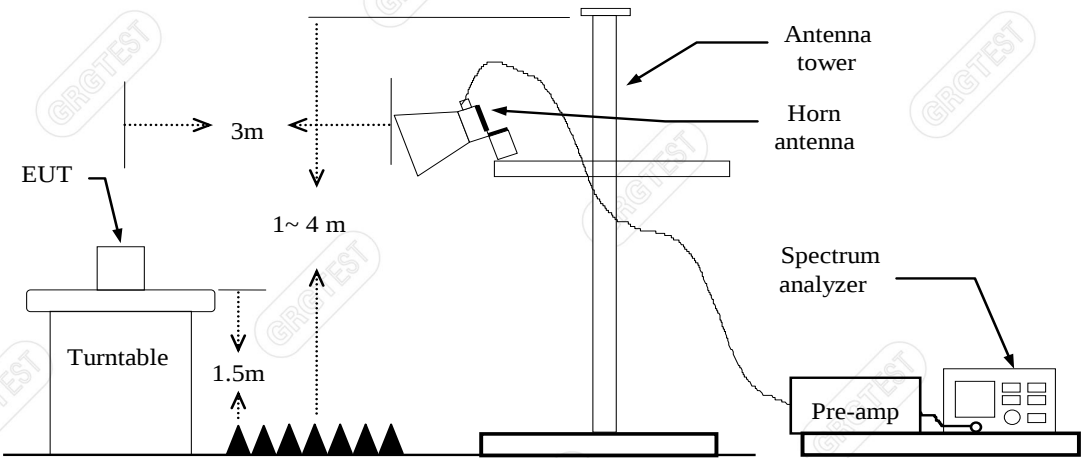


Figure 3. 1GHz to 18GHz radiated emissions test configuration

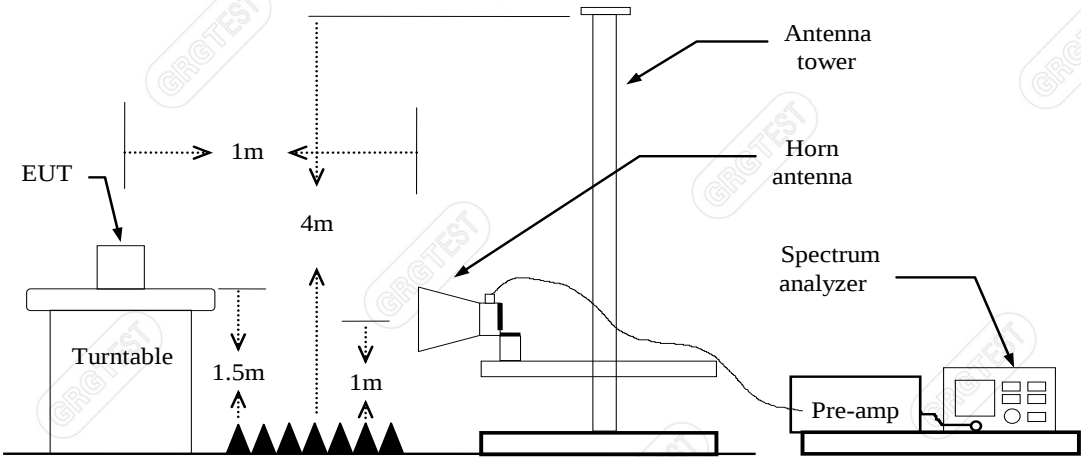


Figure 4. 18GHz to 26.5GHz radiated emissions test configuration

6.4 DATA SAMPLE

30MHz to 1GHz

Suspected Data List											
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity	Verdict
xxx	xxx	57.15	25.66	-31.49	40.00	14.34	QP	200	359	Horizontal	PASS

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Correct Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m)-Limit (dBuV/m)
 Peak = Peak Reading
 QP = Quasi-peak Reading

1GHz-18GHz

No.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
xxx	xxxx	78.01	55.30	-22.71	74.00	18.70	100	50	Horizontal
xxx	xxxx	66.37	43.66	-22.71	54.00	10.34	100	50	Horizontal


Above 18GHz

NO.	Freq. [MHz]	Reading [dBμV/m]	Level for 1m [dBμV/m]	Level for 3m [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
xxx	xxxx	54.49	42.38	32.84	-12.11	74	41.16	100	211	Horizontal
xxx	xxxx	43.99	31.88	22.34	-12.11	54	31.66	100	211	Horizontal

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver reading
 Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Level for 1m (dBuV/m) = Reading (dBuV/m) + Factor (dB)
 Level for 3m (dBuV/m) = Level for 1m (dBuV/m) + 20*log(1/3)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Limit (dBuV/m) – Level (dBuV/m)
 Polarity = Antenna polarization
 Peak = Peak Reading

6.5 TEST RESULTS

The test are under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Y position. So the data shown the Y position only.




—Blank space below this page—

Below 1GHz

Note: Pre-scan all modes, only the worst case(TX_BLE_1M_2440MHz) is recorded in this report.


Power supply:	DC 3.3V	Environmental Conditions:	26.3℃/59%RH/101.0kPa
Test Engineer:	Qin tingting	Test Date:	2024-07-11
Frequency	2440MHz(TX_BLE_1M)	/	/

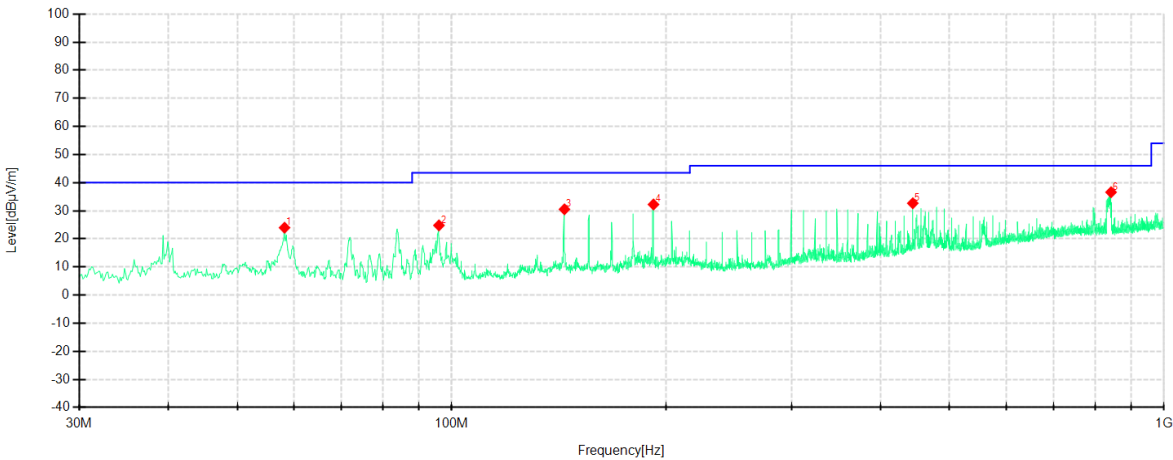

Suspected Data List											
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity	Verdict
1	58.2548	53.37	23.97	-29.40	40.00	16.03	QP	200	263	Horizontal	PASS
2	95.9682	57.46	24.79	-32.67	43.50	18.71	QP	200	340	Horizontal	PASS
3	143.9892	58.82	30.52	-28.30	43.50	12.98	QP	200	43	Horizontal	PASS
4	192.0103	63.24	32.25	-30.99	43.50	11.25	QP	200	30	Horizontal	PASS
5	443.9993	55.14	32.68	-22.46	46.00	13.32	QP	200	184	Horizontal	PASS
6	842.7191	52.76	36.60	-16.16	46.00	9.40	QP	100	343	Horizontal	PASS

Blank space below this page

Power supply:	DC 3.3V	Environmental Conditions:	26.3℃/59%RH/101.0kPa
Test Engineer:	Qin tingting	Test Date:	2024-07-11
Frequency	2440MHz(TX_BLE_1M)	/	/

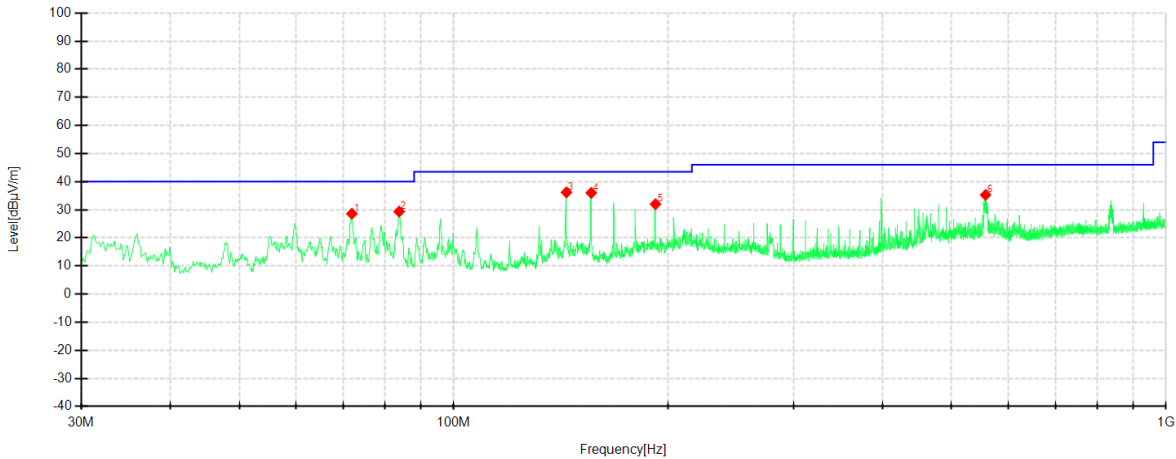

Suspected Data List											
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity	Verdict
1	71.9577	60.17	28.61	-31.56	40.00	11.39	QP	100	300	Vertical	PASS
2	83.8417	63.08	29.36	-33.72	40.00	10.64	QP	100	27	Vertical	PASS
3	143.9892	64.49	36.19	-28.30	43.50	7.31	QP	100	313	Vertical	PASS
4	155.9945	64.22	36.01	-28.21	43.50	7.49	QP	100	313	Vertical	PASS
5	192.0103	62.99	32.00	-30.99	43.50	11.50	QP	100	300	Vertical	PASS
6	558.1098	55.50	35.30	-20.20	46.00	10.70	QP	100	339	Vertical	PASS

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
- 3 The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.

1GHz-18GHz:

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Mode: TX/ BLE_1M
Lowest Frequency (2402MHz)
Environment: 26.3°C/59%RH/101.0kPa
Tested By: Qin tingting

Voltage: DC 3.3V
Date: 2024-07-11

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1396.2000	53.77	45.81	-7.96	74.00	28.19	100	113	Horizontal
2	2498.6000	47.58	47.35	-0.23	74.00	26.65	200	48	Horizontal
3	4804.5000	57.13	50.00	-7.13	74.00	24.00	200	135	Horizontal
4	11413.5000	37.61	49.51	11.90	74.00	24.49	200	135	Horizontal
5	15661.5000	37.11	49.47	12.36	74.00	24.53	200	122	Horizontal
6	17986.5000	37.03	48.70	11.67	74.00	25.30	100	125	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4804.0135	-7.13	57.16	50.03	54.00	3.97	148	142.8	Horizontal
2	11413.5000	11.90	29.18	41.08	54.00	12.92	200	135	Horizontal
3	15661.5000	12.36	29.76	42.12	54.00	11.88	200	122	Horizontal
4	17986.5000	11.67	28.31	39.98	54.00	14.02	100	125	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2199.0000	50.59	46.99	-3.60	74.00	27.01	100	156	Vertical
2	2657.0000	49.97	47.28	-2.69	74.00	26.72	100	251	Vertical
3	4803.0000	57.78	50.62	-7.16	74.00	23.38	100	164	Vertical
4	6403.5000	54.43	52.21	-2.22	74.00	21.79	100	231	Vertical
5	13510.5000	34.95	49.19	14.24	74.00	24.81	100	204	Vertical
6	18000.0000	37.70	51.17	13.47	74.00	22.83	200	111	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4803.9730	-7.16	52.82	45.66	54.00	8.34	100	186.7	Horizontal
2	6391.5455	-2.22	44.55	42.33	54.00	11.67	100	255.2	Horizontal
3	13510.5000	14.24	26.29	40.53	54.00	13.47	100	204	Horizontal
4	18000.0000	13.47	26.97	40.44	54.00	13.56	200	111	Horizontal

Mode: TX/ BLE_1M
Middle Frequency (2440MHz)
Environment: 26.3°C/59%RH/101.0kPa
Tested By: Qin tingting

Voltage: DC 3.3V
Date: 2024-07-11

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1197.2000	56.78	47.79	-8.99	74.00	26.21	200	273	Horizontal
2	1726.4000	53.71	46.72	-6.99	74.00	27.28	100	71	Horizontal
3	2503.8000	48.05	47.73	-0.32	74.00	26.27	100	204	Horizontal
4	4879.5000	54.79	47.90	-6.89	74.00	26.10	200	140	Horizontal
5	15642.0000	36.30	49.17	12.87	74.00	24.83	200	74	Horizontal
6	17988.0000	37.30	48.96	11.66	74.00	25.04	200	344	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	15642.0000	12.87	27.27	40.14	54.00	13.86	200	74	Horizontal
2	17988.0000	11.66	28.34	40.00	54.00	14.00	200	344	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1249.4000	51.96	44.68	-7.28	74.00	29.32	100	164	Vertical
2	1728.6000	52.30	44.79	-7.51	74.00	29.21	200	232	Vertical
3	2468.8000	48.18	47.14	-1.04	74.00	26.86	100	43	Vertical
4	4879.5000	56.27	48.96	-7.31	74.00	25.04	100	210	Vertical
5	6384.0000	53.57	51.02	-2.55	74.00	22.98	100	253	Vertical
6	17983.5000	37.54	51.02	13.48	74.00	22.98	200	236	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4879.9945	-7.31	52.89	45.58	54.00	8.42	100	190.8	Vertical
2	6378.0870	-2.55	45.96	43.41	54.00	10.59	100	259.2	Vertical
3	17983.5000	13.48	27.57	41.05	54.00	12.95	200	236	Vertical

Mode: TX/ BLE_1M
Highest Frequency (2480MHz)
Environment: 26.3°C/59%RH/101.0kPa
Tested By: Qin tingting

Voltage: DC 3.3V
Date: 2024-07-11

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1682.2000	53.90	46.51	-7.39	74.00	27.49	100	110	Horizontal
2	2495.6000	47.93	47.59	-0.34	74.00	26.41	200	168	Horizontal
3	2793.6000	48.46	47.23	-1.23	74.00	26.77	100	272	Horizontal
4	4960.5000	55.03	48.69	-6.34	74.00	25.31	200	129	Horizontal
5	15684.0000	38.32	49.55	11.23	74.00	24.45	100	360	Horizontal
6	18000.0000	38.39	50.06	11.67	74.00	23.94	200	235	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.9975	-6.34	51.64	45.30	54.00	8.70	115	121	Horizontal
2	15684.0000	11.23	32.51	43.74	54.00	10.26	100	360	Horizontal
3	18000.0000	11.67	28.63	40.30	54.00	13.70	200	235	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1791.8000	52.97	46.99	-5.98	74.00	27.01	100	122	Vertical
2	2496.2000	48.09	47.64	-0.45	74.00	26.36	100	202	Vertical
3	4960.5000	57.48	50.78	-6.70	74.00	23.22	100	211	Vertical
4	7993.5000	43.43	46.80	3.37	74.00	27.20	100	184	Vertical
5	13530.0000	35.56	49.57	14.01	74.00	24.43	100	46	Vertical
6	17998.5000	38.38	51.85	13.47	74.00	22.15	100	359	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.9975	-6.70	54.15	47.45	54.00	6.55	102	195.2	Vertical
2	13530.0000	14.01	24.19	38.20	54.00	15.80	100	46	Vertical
3	17998.5000	13.47	28.37	41.84	54.00	12.16	100	359	Vertical

Mode: TX/ BLE_2M
Lowest Frequency (2402MHz)
Environment: 26.3°C/59%RH/101.0kPa
Tested By: Qin tingting

Voltage: DC 3.3V
Date: 2024-07-11

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1674.6000	53.39	45.96	-7.43	74.00	28.04	100	307	Horizontal
2	2499.2000	46.95	46.75	-0.20	74.00	27.25	100	320	Horizontal
3	4804.5000	57.05	49.92	-7.13	74.00	24.08	100	244	Horizontal
4	13168.5000	35.66	49.97	14.31	74.00	24.03	200	192	Horizontal
5	15675.0000	38.04	49.73	11.69	74.00	24.27	100	10	Horizontal
6	17995.5000	37.46	49.13	11.67	74.00	24.87	200	245	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4803.9435	-7.14	49.99	42.85	54.00	11.15	151	236.3	Horizontal
2	13168.5000	14.31	26.94	41.25	54.00	12.75	200	192	Horizontal
3	15682.4850	10.19	27.25	37.44	54.00	16.56	100	339.2	Horizontal
4	17983.4650	12.53	26.76	39.29	54.00	14.71	191	218.7	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1114.2000	58.05	47.18	-10.87	74.00	26.82	200	209	Vertical
2	2192.6000	51.01	47.43	-3.58	74.00	26.57	100	169	Vertical
3	4803.0000	56.99	49.83	-7.16	74.00	24.17	100	205	Vertical
4	6367.5000	51.34	48.48	-2.86	74.00	25.52	100	261	Vertical
5	12232.5000	38.54	50.74	12.20	74.00	23.26	200	110	Vertical
6	17998.5000	37.59	51.06	13.47	74.00	22.94	100	328	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4803.9040	-7.05	51.39	44.34	54.00	9.66	100	230.8	Horizontal
2	6367.5000	-2.86	43.72	40.86	54.00	13.14	100	261	Horizontal
3	12232.5000	12.20	26.96	39.16	54.00	14.84	200	110	Horizontal
4	17998.5000	13.47	30.08	43.55	54.00	10.45	100	328	Horizontal

Mode: TX/ BLE_2M
Middle Frequency (2440MHz)
Environment: 26.3°C/59%RH/101.0kPa
Tested By: Qin tingting

Voltage: DC 3.3V
Date: 2024-07-11

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1118.0000	54.10	44.13	-9.97	74.00	29.87	100	258	Horizontal
2	2200.0000	51.02	47.22	-3.80	74.00	26.78	100	110	Horizontal
3	2497.4000	47.18	46.79	-0.39	74.00	27.21	100	203	Horizontal
4	4878.0000	53.62	46.62	-7.00	74.00	27.38	200	237	Horizontal
5	12087.0000	35.97	49.20	13.23	74.00	24.80	200	358	Horizontal
6	17997.0000	37.28	49.82	12.54	74.00	24.18	100	18	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	12087.0000	13.23	26.92	40.15	54.00	13.85	200	358	Horizontal
2	17997.0000	12.54	26.27	39.41	54.00	14.59	100	18	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1994.4000	50.32	46.41	-3.91	74.00	27.59	100	192	Vertical
2	3858.0000	55.85	44.86	-10.99	74.00	29.14	100	74	Vertical
3	4881.0000	55.29	48.36	-6.93	74.00	25.64	100	141	Vertical
4	6382.5000	50.57	48.09	-2.48	74.00	25.91	100	264	Vertical
5	12159.0000	35.89	49.73	13.84	74.00	24.27	100	180	Vertical
6	17980.5000	37.35	49.73	12.38	74.00	24.27	100	60	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4881.0000	-6.93	54.38	47.45	54.00	6.55	100	141	Horizontal
2	6382.5000	-2.48	45.61	43.13	54.00	10.87	100	264	Horizontal
3	12159.0000	13.84	28.69	42.53	54.00	11.47	100	180	Horizontal
4	17980.5000	12.38	26.93	39.31	54.00	14.69	100	60	Horizontal

Mode: TX/ BLE_2M
Highest Frequency (2480MHz)
Environment: 26.3°C/59%RH/101.0kPa
Tested By: Qin tingting

Voltage: DC 3.3V
Date: 2024-07-11

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1114.8000	53.27	43.89	-9.38	74.00	30.11	100	154	Horizontal
2	1672.8000	54.02	46.58	-7.44	74.00	27.42	100	316	Horizontal
3	2194.0000	51.75	47.54	-4.21	74.00	26.46	100	236	Horizontal
4	4960.5000	54.87	48.53	-6.34	74.00	25.47	200	124	Horizontal
5	12148.5000	35.32	49.49	14.17	74.00	24.51	200	205	Horizontal
6	17998.5000	38.45	50.12	11.67	74.00	23.88	100	179	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.9255	-6.34	47.83	41.49	54.00	12.51	136	147.7	Horizontal
2	12148.5000	14.17	24.76	38.93	54.00	15.07	200	205	Horizontal
3	17998.5000	11.67	29.19	40.86	54.00	13.14	100	179	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1115.2000	56.10	45.24	-10.86	74.00	28.76	200	210	Vertical
2	1995.2000	52.93	47.81	-5.12	74.00	26.19	200	210	Vertical
3	4959.0000	56.73	50.02	-6.71	74.00	23.98	100	192	Vertical
4	6379.5000	57.06	54.43	-2.63	74.00	19.57	100	246	Vertical
5	11386.5000	37.58	49.68	12.10	74.00	24.32	100	97	Vertical
6	17974.5000	37.22	50.71	13.49	74.00	23.29	100	192	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.9330	-6.71	50.03	43.32	54.00	10.68	100	210.8	Vertical
2	6367.1285	-2.63	43.93	41.30	54.00	12.70	100	264.9	Vertical
3	11386.5000	12.10	26.37	38.47	54.00	15.53	100	97	Vertical
4	17974.5000	13.49	29.16	42.65	54.00	11.35	100	192	Vertical

18GHz to 26.5GHz

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Note: Pre-scan all modes, only the worst case(TX/BLE_1M_2402MHz) is recorded in this report.

Mode: TX/ BLE_1M

Lowest Frequency (2402MHz)

Environment: 26.3°C/59%RH/101.0kPa

Tested By: Qin tingting

Voltage: DC 3.3V

Date: 2024-07-11

NO.	Freq. [MHz]	Reading [dBμV/m]	Level in 1m [dBμV/m]	Level in 3m [dBμV/m]	Factor [dB]	Limit in 3m [dBμV/m]	Margin in 3m [dB]	Height [cm]	Angle [°]	Polarity
1	18569.5000	54.24	36.90	27.36	-17.34	74	46.64	100	328	Horizontal
2	19361.2750	53.98	37.20	27.66	-16.78	74	46.34	120	15	Horizontal
3	21075.7250	52.99	37.17	27.63	-15.82	74	46.37	100	344	Horizontal
4	22827.5750	51.69	36.96	27.42	-14.73	74	46.58	100	359	Horizontal
5	23332.9000	51.17	36.51	26.97	-14.66	74	47.03	110	156	Horizontal
6	25435.8000	49.75	35.63	26.09	-14.12	74	47.91	100	126	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level in 1m [dBμV/m]	Level in 3m [dBμV/m]	Factor [dB]	Limit in 3m [dBμV/m]	Margin in 3m [dB]	Height [cm]	Angle [°]	Polarity
1	18493.4250	54.22	36.87	27.33	-17.35	74	46.67	130	298	Vertical
2	19629.8750	53.60	36.96	27.42	-16.64	74	46.58	100	48	Vertical
3	22196.8750	51.69	36.38	26.84	-15.31	74	47.16	120	235	Vertical
4	23770.6500	49.94	35.46	25.92	-14.48	74	48.08	100	268	Vertical
5	24387.7500	50.15	35.95	26.41	-14.20	74	47.59	100	63	Vertical
6	26069.0500	50.37	36.26	26.72	-14.11	74	47.28	100	95	Vertical

Remark:

- 1 Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2 Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Above 18G test distance is 1m, so the Level for 3m= Level for 1m + 20*log(1/3).

7. 6dB BANDWIDTH


7.1 LIMITS

Systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

7.2 TEST PROCEDURES

- a) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the Automatic power measuring unit.
- b) Set resolution bandwidth (RBW) = 100kHz.Set the video bandwidth (VBW) ≥ 3 x RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize, record 6dB bandwidth value.
- c) Repeat above procedures until all frequencies measured were complete.

7.3 TEST SETUP



7.4 TEST RESULTS

Environment: 24.5℃/45%RH/101.0kPa
Tested By: Qin tingting

Voltage: DC 3.3V
Date: 2024-07-03

BLE_1M


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Lowest	2402	760	≥500	PASS
Middle	2440	740		PASS
Highest	2480	744		PASS

BLE_2M


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Lowest	2402	1192	≥500	PASS
Middle	2440	1220		PASS
Highest	2480	1308		PASS

BLE_1M


Lowest Frequency (2402MHz)

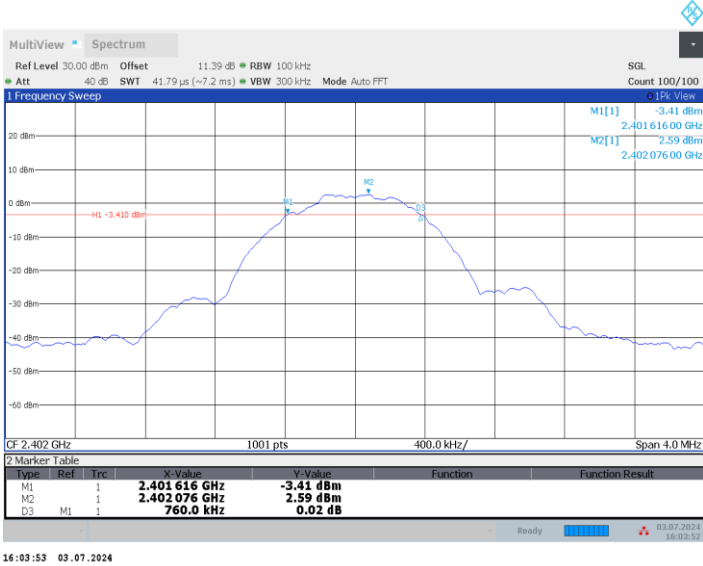

Middle Frequency (2440 MHz)

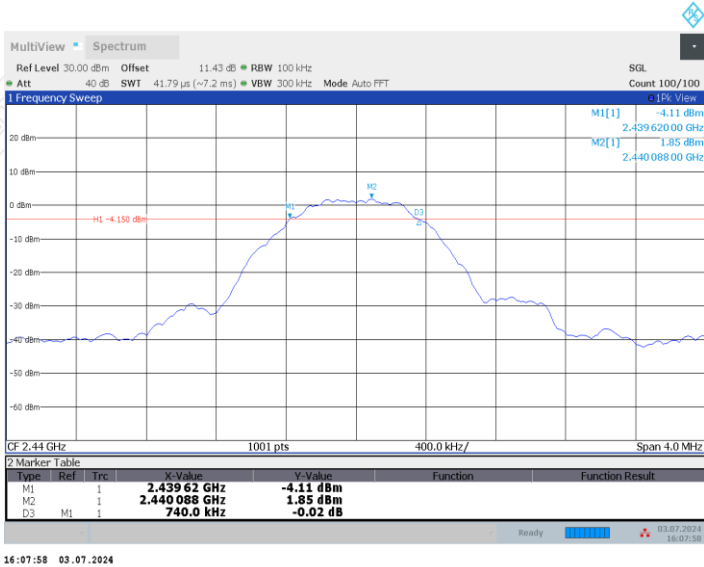


Highest Frequency (2480MHz)

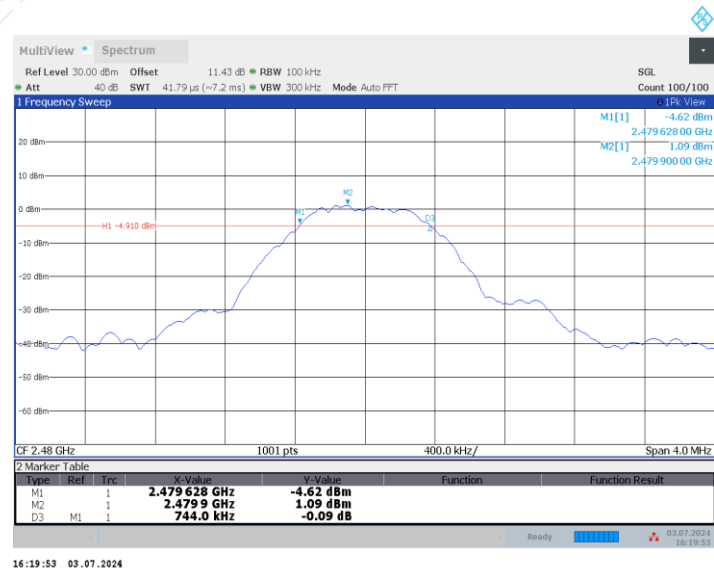


BLE_2M


Lowest Frequency (2402MHz)

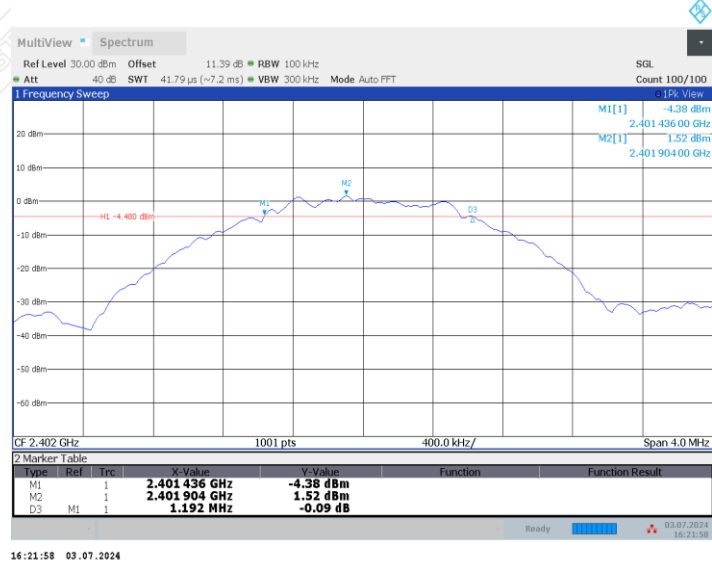

Middle Frequency (2440 MHz)

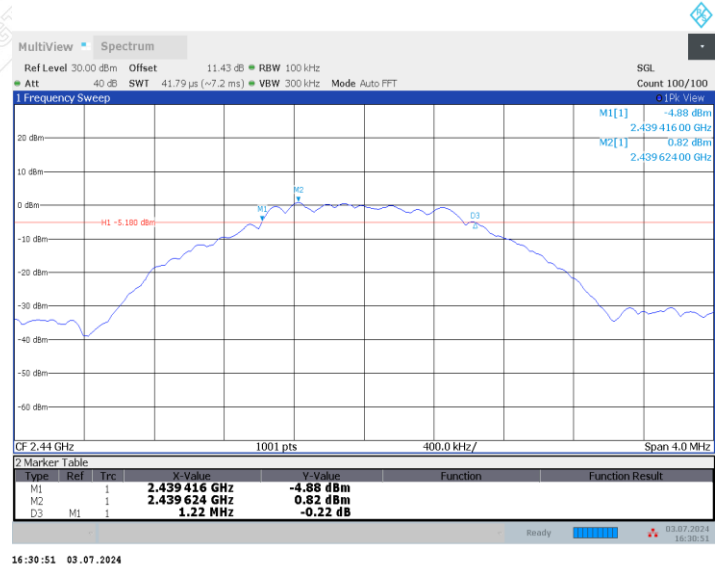

Highest Frequency (2480MHz)

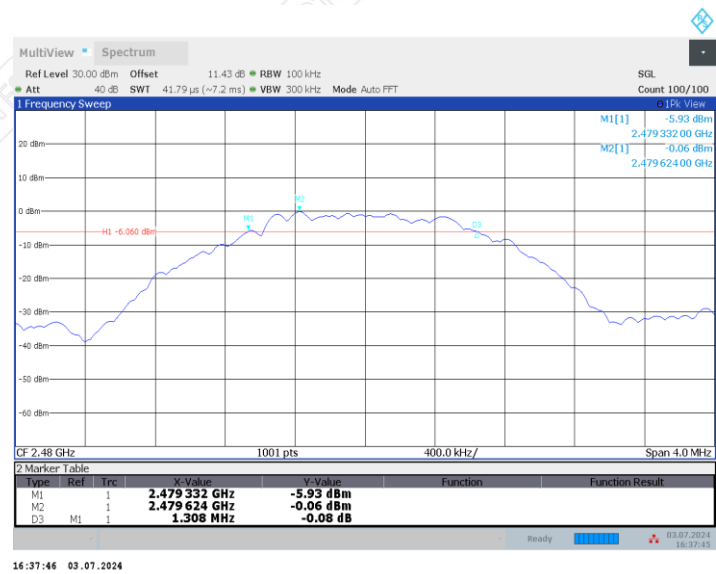

8. MAXIMUM PEAK OUTPUT POWER


8.1 LIMITS

The maximum Peak output power measurement is 1W

8.2 TEST PROCEDURES

- a) RF output of EUT was connected to the broadband peak RF power meter by RF cable. The path loss was compensated to the results for each measurement.
- b) Set to the maximum power setting and enable the EUT transmit continuously.
- c) Measure the conducted output power and record the results in the test report.

8.3 TEST SETUP

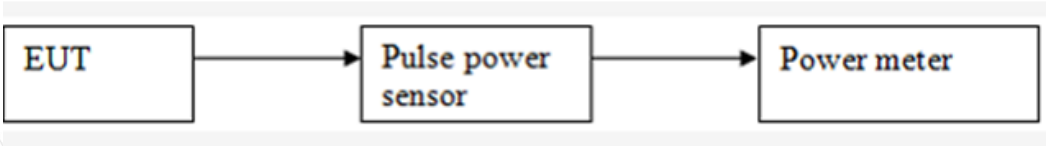

8.4 TEST RESULTS

Environment: 24.5°C/45%RH/101.0kPa
Tested By: Qin tingting

Voltage: DC 3.3V
Date: 2024-07-03

BLE_1M

Channel	Frequency (MHz)	Measured Channel Power (dBm)	Limit	Peak/ Average	Result
Lowest	2402	4.33	1W (30dBm)	Peak	Pass
Middle	2440	4.16			Pass
Highest	2480	3.77			Pass

BLE_2M

Channel	Frequency (MHz)	Measured Channel Power (dBm)	Limit	Peak/ Average	Result
Lowest	2402	4.37	1W (30dBm)	Peak	Pass
Middle	2440	4.18			Pass
Highest	2480	3.78			Pass

9. POWER SPECTRAL DENSITY


9.1 LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

9.2 TEST PROCEDURES

- a) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- b) Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:
 - a) Set analyzer center frequency to DTS channel center frequency.
 - b) Set the span to at least 1.5 times the DTS bandwidth.
 - c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
- d) Repeat above procedures until all frequencies measured were complete.

9.3 TEST SETUP



9.4 TEST RESULTS

Environment: 24.5°C/45%RH/101.0kPa
Tested By: Qin tingting

Voltage: DC 3.3V
Date: 2024-07-03

BLE_1M


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Test Result
Lowest	2402	-12.53	8.00	PASS
Middle	2440	-13.26		PASS
Highest	2480	-12.88		PASS

BLE_2M


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Test Result
Lowest	2402	-15.62	8.00	PASS
Middle	2440	-16.48		PASS
Highest	2480	-16.93		PASS

BLE_1M


Lowest Frequency (2402MHz)

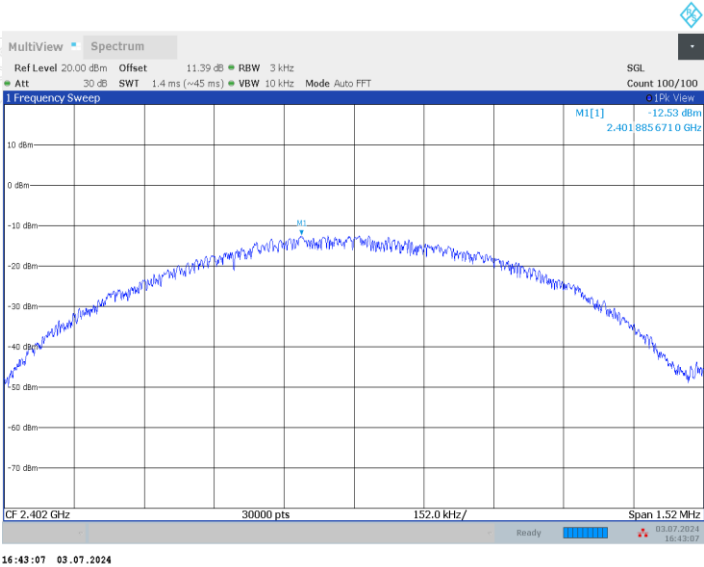

Middle Frequency (2440 MHz)

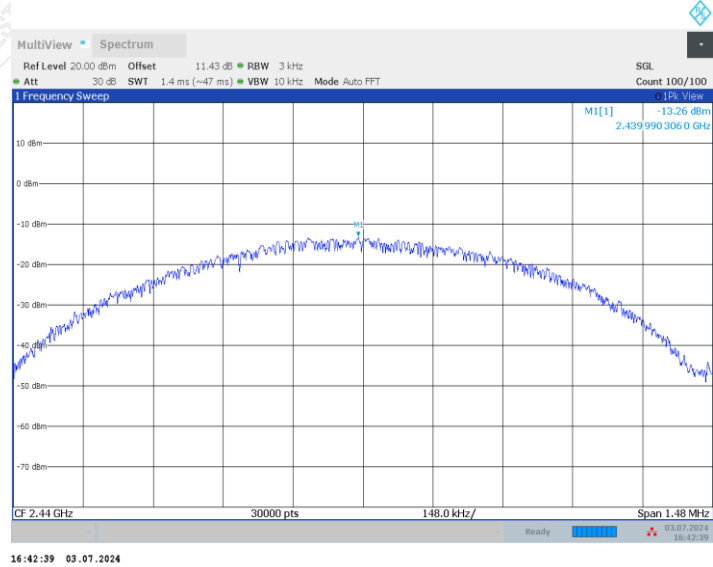


Highest Frequency (2480MHz)

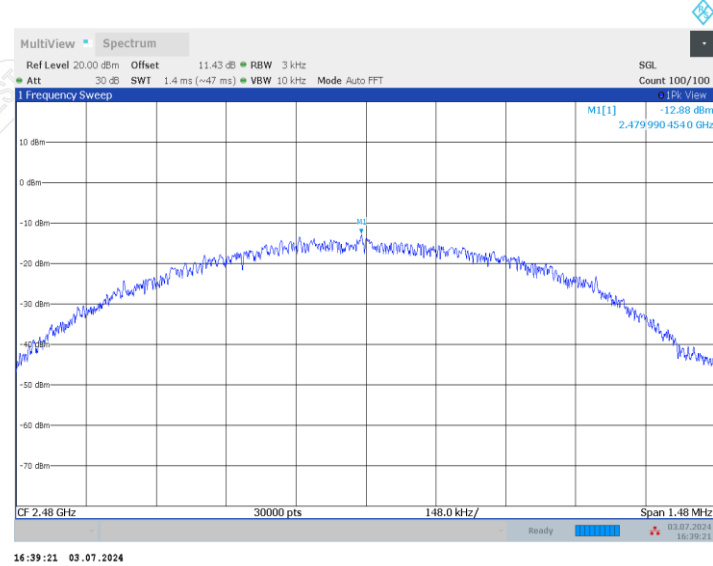


BLE_2M


Lowest Frequency (2402MHz)

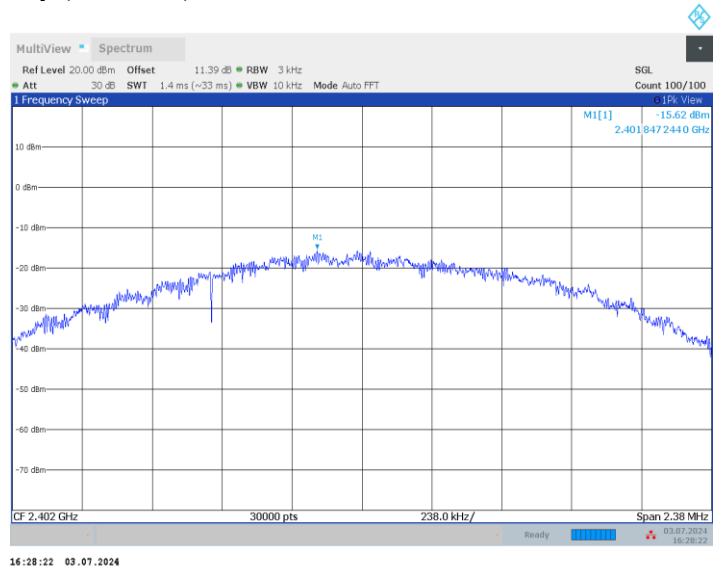

Middle Frequency (2440 MHz)

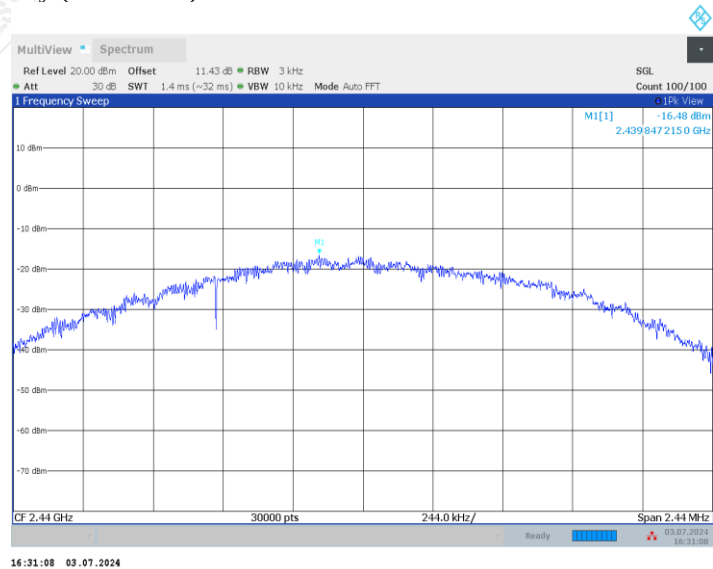

Highest Frequency (2480MHz)

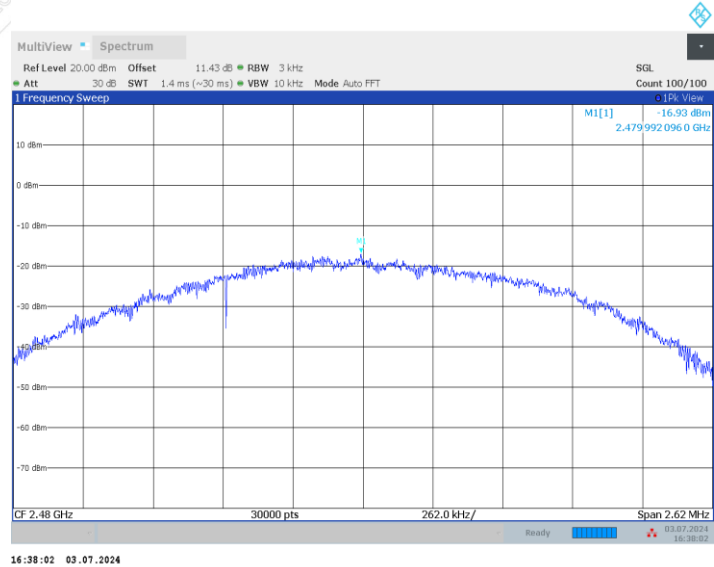

Blank space below this page

10. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS

10.1 LIMITS

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB.


10.2 TEST PROCEDURES

Test procedures follow KDB 558074 D01 15.247 Measurement Guidance v05r02.

Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.

- Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.
- Set the spectrum analyzer: RBW =100kHz; VBW =300kHz, Frequency range = 30MHz to 26.5GHz; Sweep = auto; Detector Function = Peak. Trace = Max, hold.
- Measure and record the results in the test report.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

10.3 TEST SETUP



10.4 TEST RESULTS

Environment: 24.5°C/45%RH/101.0kPa
Tested By: Qin tingting


Voltage: DC 3.3V
Date: 2024-07-03

Band edge measurements


TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	0.42	-50.48	≤-19.58	PASS
		High	2480	-1.83	-48.72	≤-21.83	PASS
BLE_2M	Ant1	Low	2402	1.16	-42.36	≤-18.84	PASS
		High	2480	-2.40	-49.28	≤-22.4	PASS

BLE_1M

Lowest Frequency (2402MHz)
2.35GHz-2.405GHz

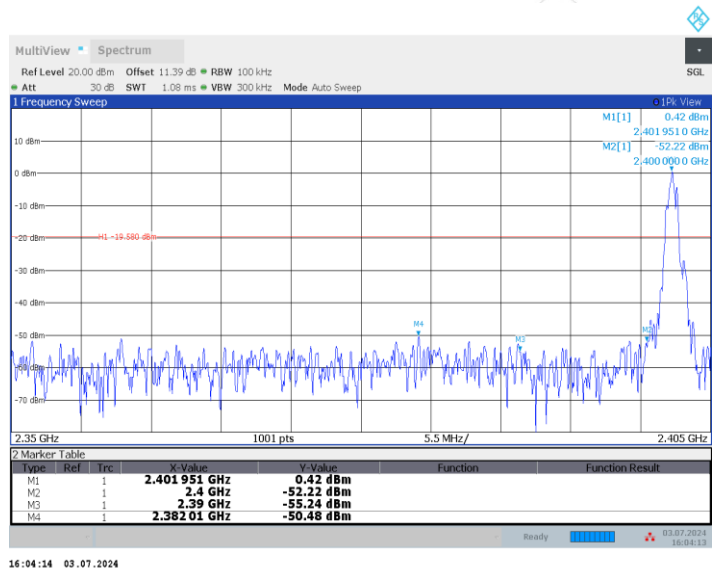


Highest Frequency (2480MHz)
2.47GHz-2.55GHz

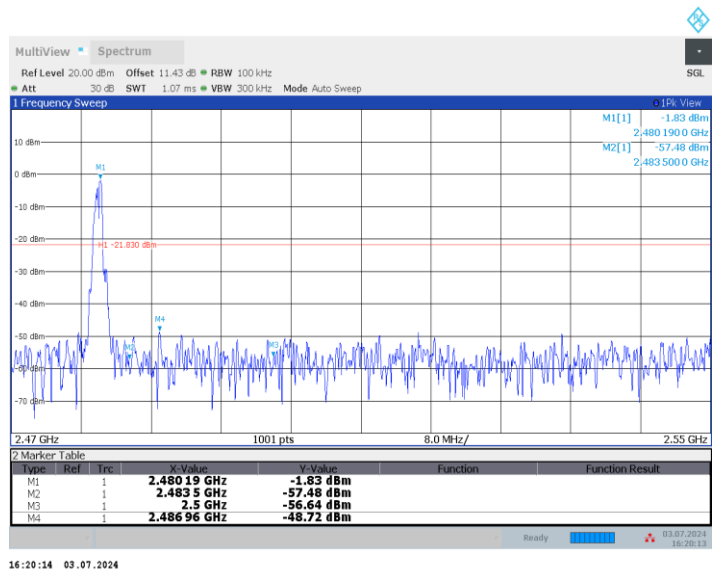


BLE_2M

Lowest Frequency (2402MHz)
2.35GHz-2.405GHz

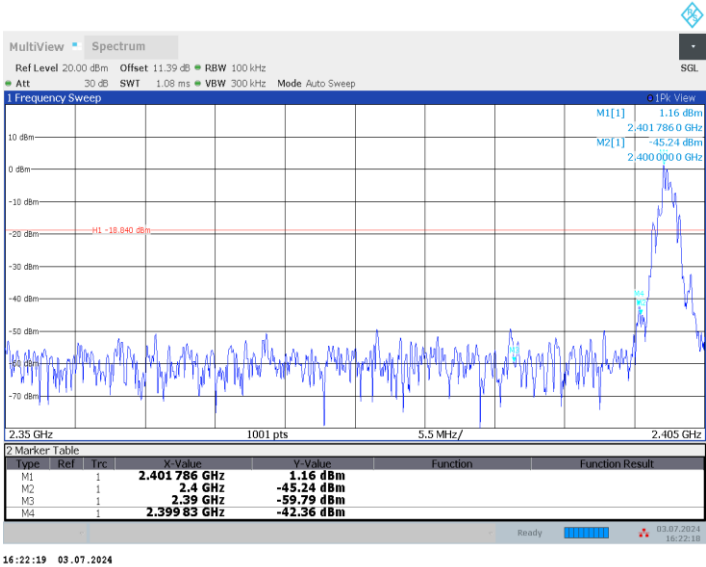

Highest Frequency (2480MHz)
2.47GHz-2.55GHz

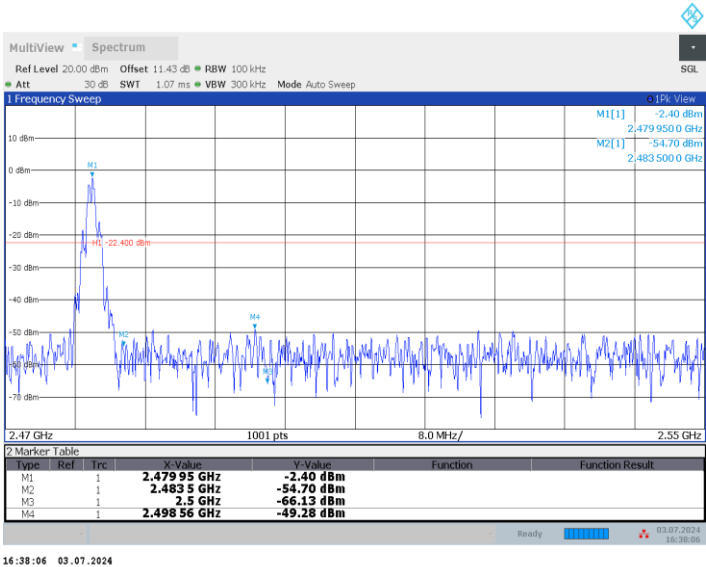




Conducted Spurious Emission

Test Mode	Antenna	Freq(MHz)	Freq Range [MHz]	Ref Level [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	2.45	2.45	---	PASS
			30~1000	2.45	-56.83	≤-17.55	PASS
			1000~26500	2.45	-42.71	≤-17.55	PASS
		2440	Reference	1.94	1.94	---	PASS
			30~1000	1.94	-56.92	≤-18.06	PASS
			1000~26500	1.94	-43.06	≤-18.06	PASS
		2480	Reference	0.46	0.46	---	PASS
			30~1000	0.46	-57.62	≤-19.54	PASS
			1000~26500	0.46	-43.5	≤-19.54	PASS
BLE_2M	Ant1	2402	Reference	0.72	0.72	---	PASS
			30~1000	0.72	-56.71	≤-19.28	PASS
			1000~26500	0.72	-43.13	≤-19.28	PASS
		2440	Reference	-0.17	-0.17	---	PASS
			30~1000	-0.17	-57.04	≤-20.17	PASS
			1000~26500	-0.17	-43.36	≤-20.17	PASS
		2480	Reference	-0.03	-0.03	---	PASS
			30~1000	-0.03	-57.42	≤-20.03	PASS
			1000~26500	-0.03	-43.59	≤-20.03	PASS



BLE_1M


Lowest Frequency (2402MHz)

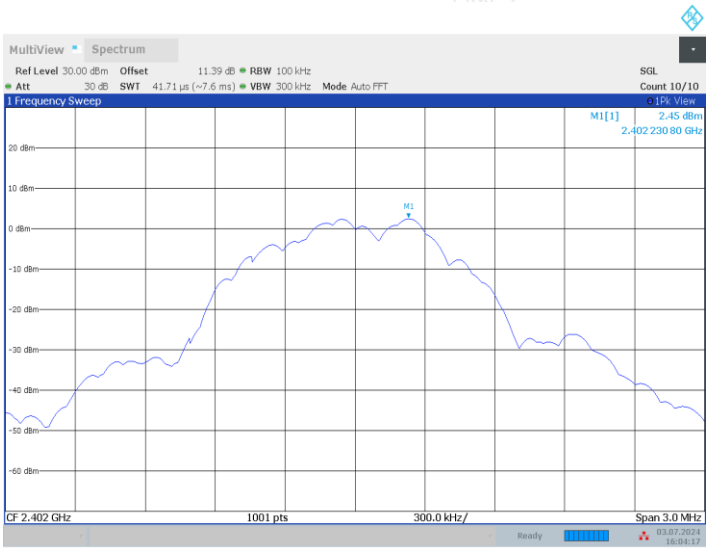

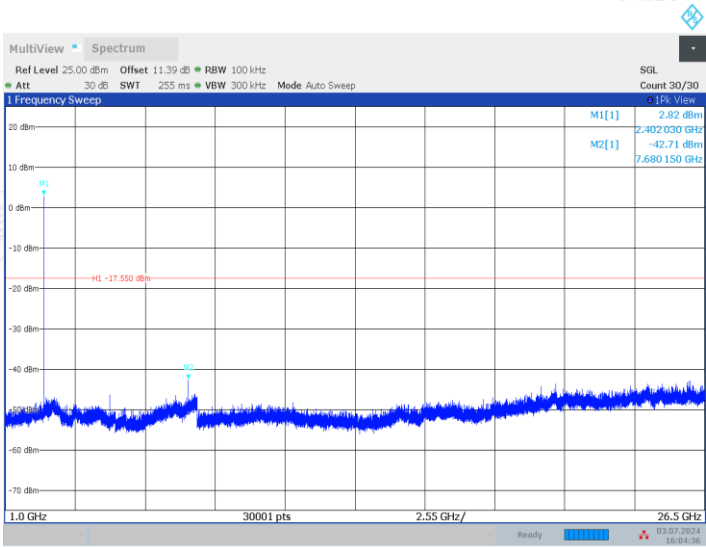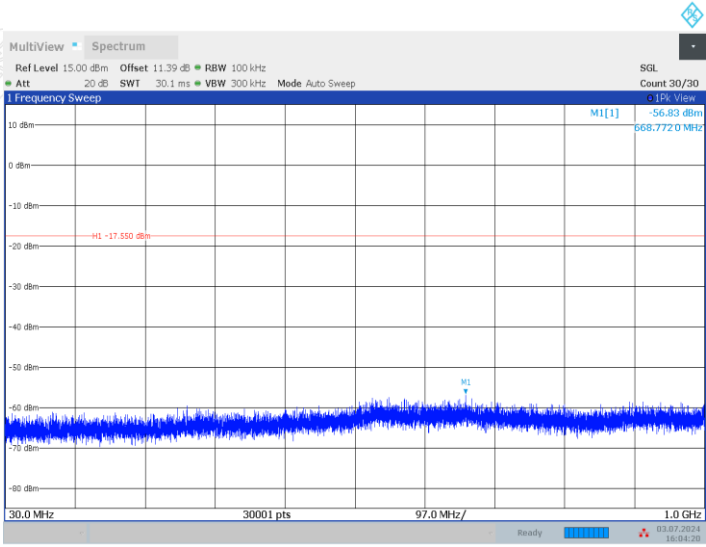




Middle Frequency (2440MHz)

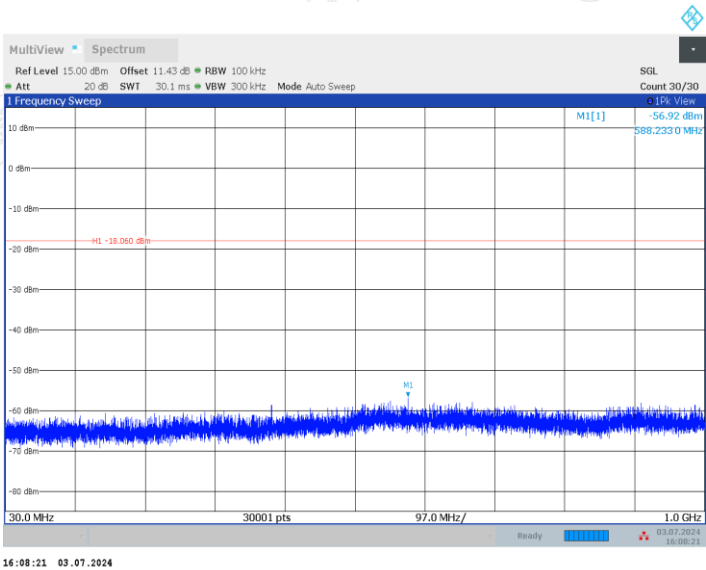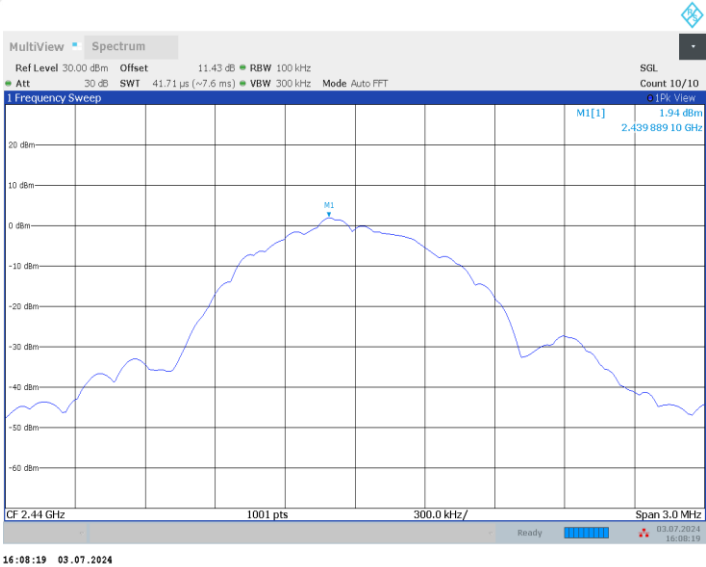

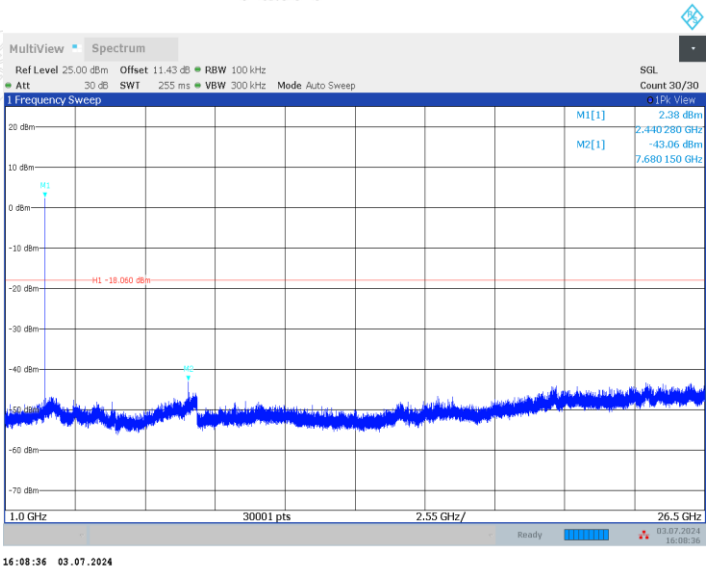



Highest Frequency (2480MHz)

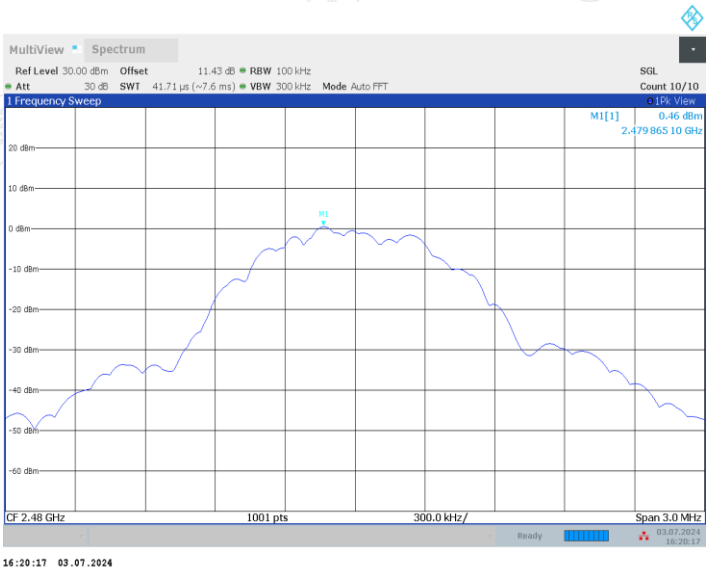


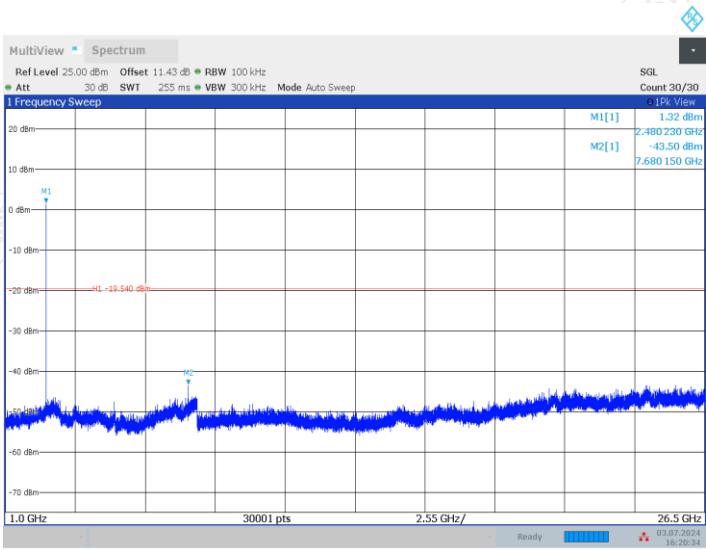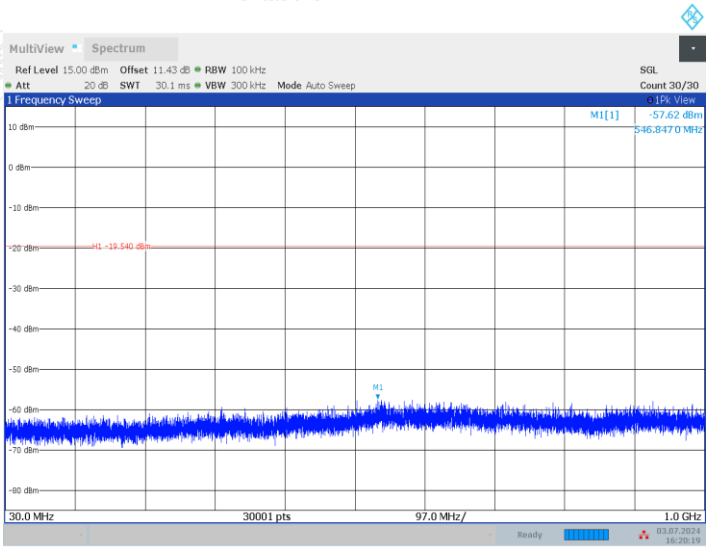


BLE_2M


Lowest Frequency (2402MHz)

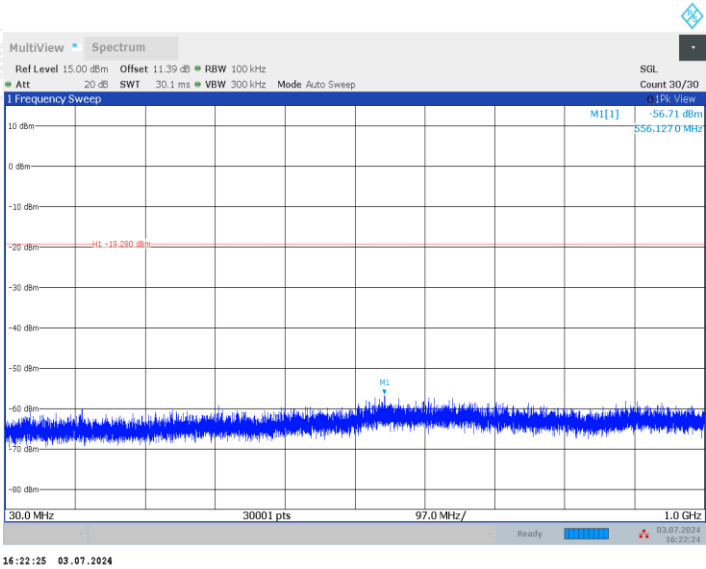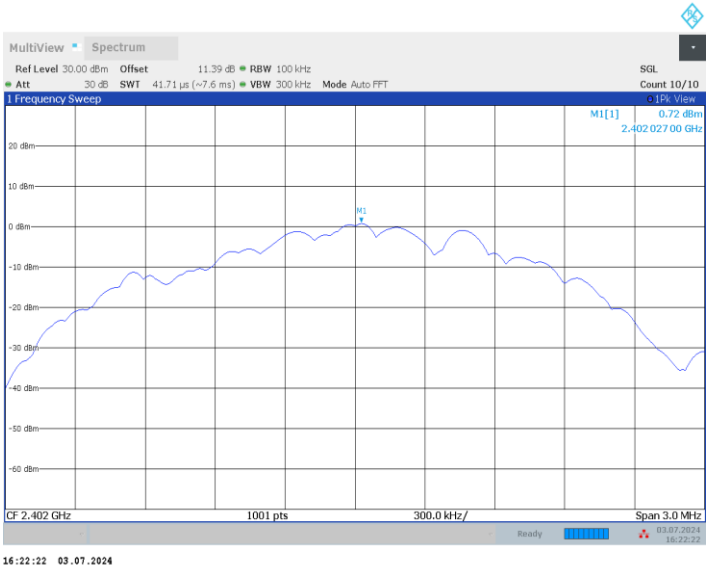

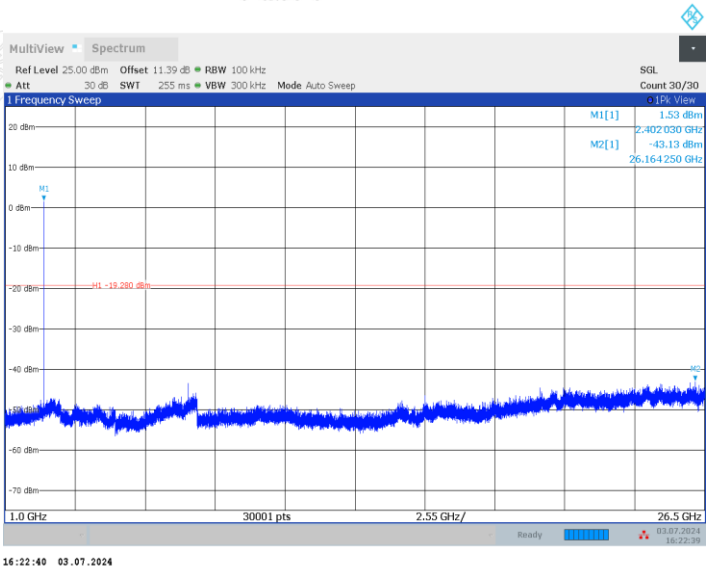


Middle Frequency (2440MHz)

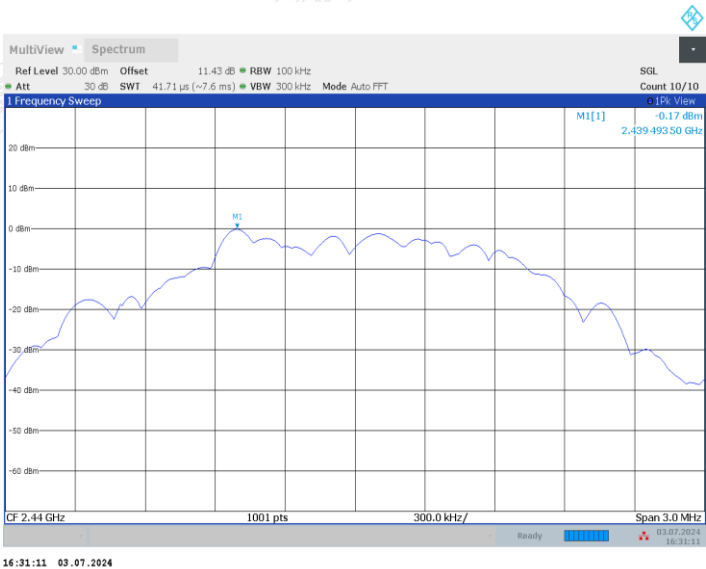


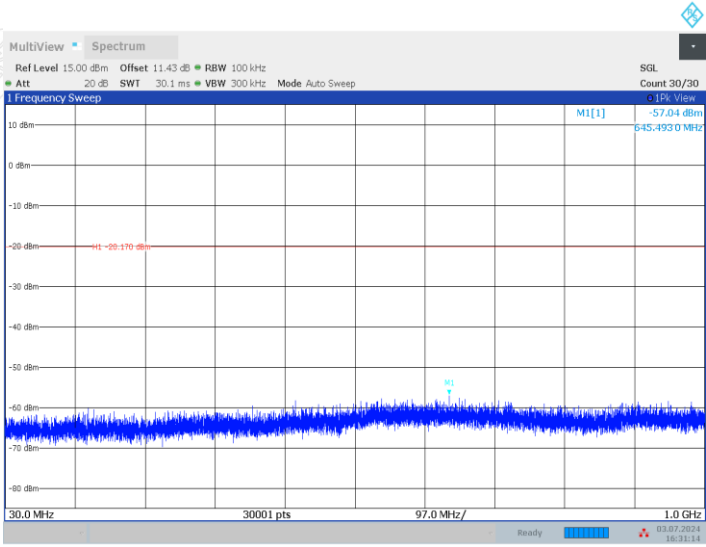



16:31:14 03.07.2024

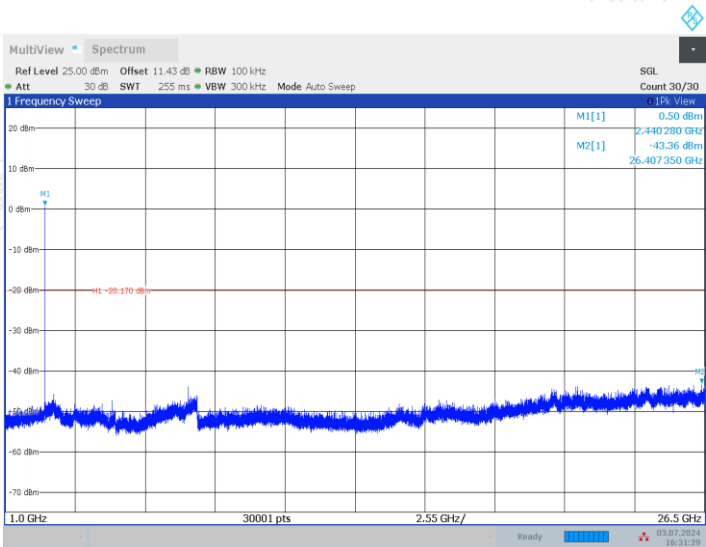

16:31:29 03.07.2024

Highest Frequency (2480MHz)

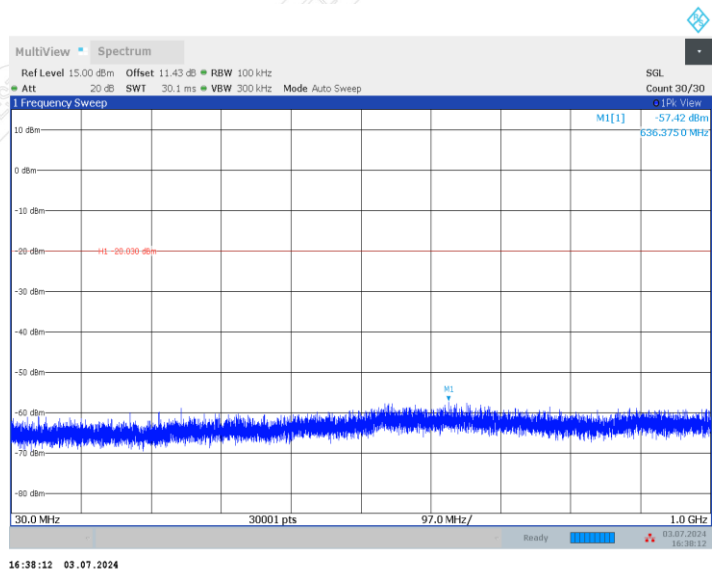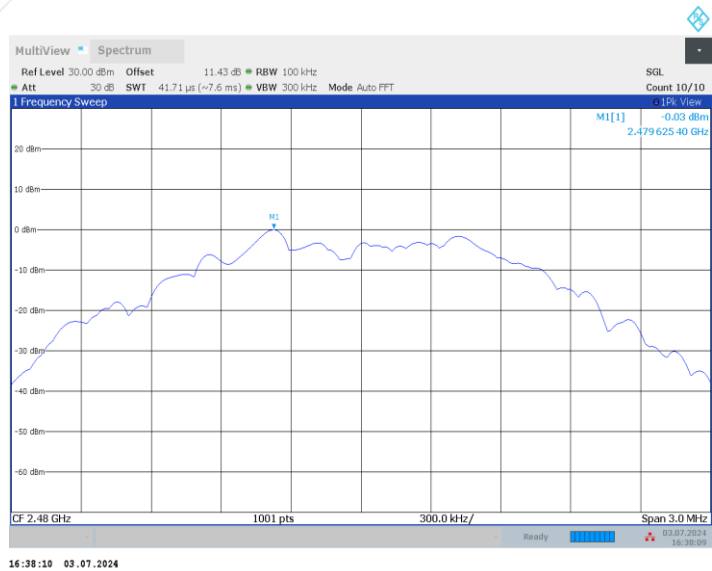

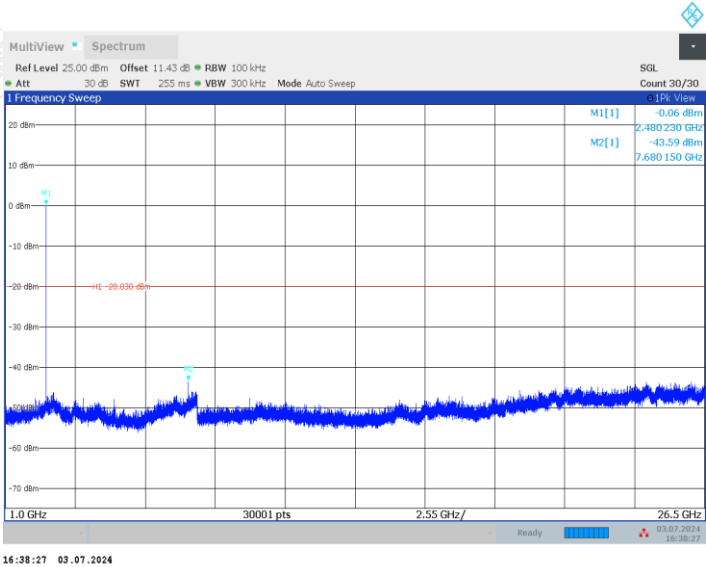

Blank space below this page

11. RESTRICTED BANDS OF OPERATION

11.1 LIMITS

Section 15.247(d) In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

Frequency (MHz)	Quasi-peak(μ V/m)	Measurement distance(m)	Quasi-peak(dB μ V/m)@distance 3m
0.009-0.490	2400/F(kHz)	300	128.5~93.8
0.490-1.705	24000/F(kHz)	30	73.8~63
1.705-30.0	30	30	69.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54


11.2 TEST PROCEDURES

Test procedures follow KDB 558074 D01 15.247 Meas Guidance v05r02.

- The EUT is placed on a turntable, which is 1.5m above the ground plane.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO.
 - AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO.


If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$, Where T is defined in section 2.9.
- Repeat the procedures until all the PEAK and AVERAGE versus polarization are measured.

11.3 TEST SETUP

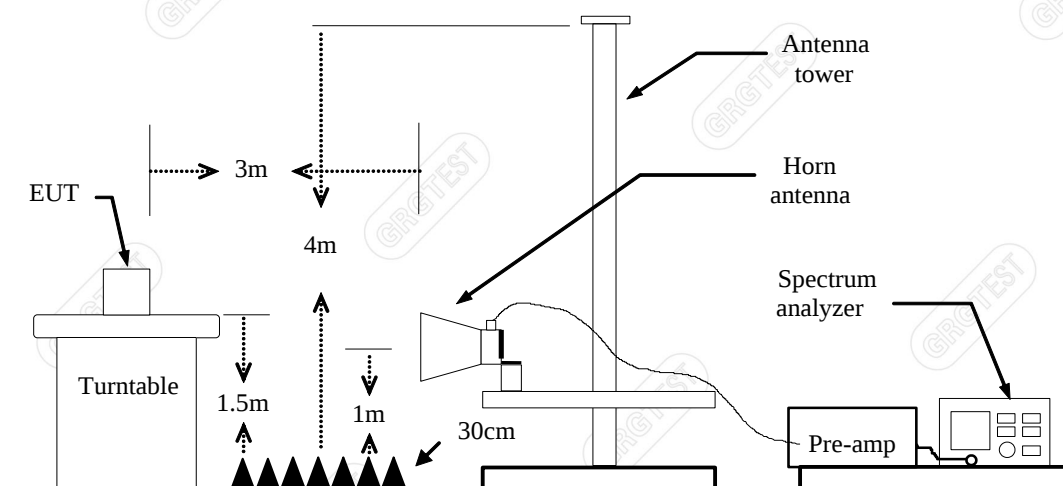

11.4 TEST RESULTS


The test are under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Y position. So the data shown the Y position only.



Test Date	2024-07-11	Test Engineer:	Qin tingting
Test Voltage:	DC 3.3V	Environmental Conditions	26.3℃/59%RH/101.0kPa


BLE 1M
Lowest Frequency
Frequency 2402MHz
Detector mode: Peak

Polarity: Horizontal

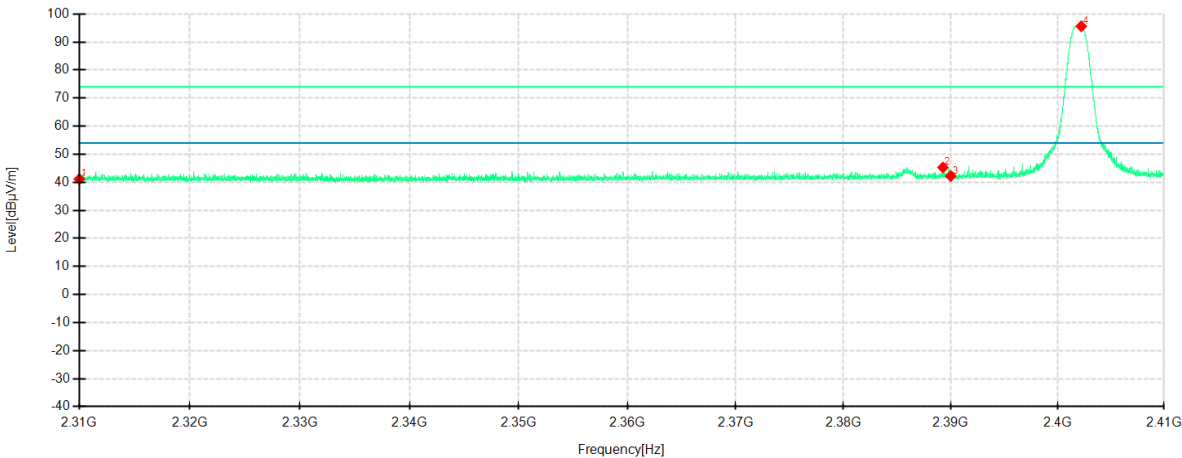

Detector mode: Peak

Polarity: Vertical

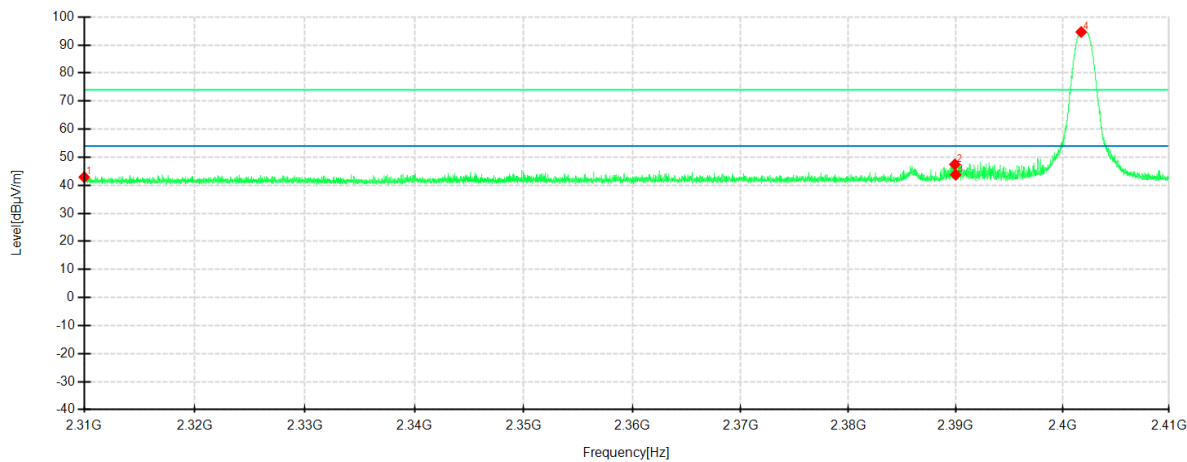

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	46.60	41.12	-5.48	74.00	32.88	100	164	Horizontal	/
2	2389.2750	50.69	45.29	-5.40	74.00	28.71	100	100	Horizontal	/
3	2390.0000	47.61	42.22	-5.39	74.00	31.78	200	69	Horizontal	/
4	2402.2250	100.84	95.61	-5.23	74.00	-21.61	100	318	Horizontal	No limit
1	2310.0000	48.20	42.88	-5.32	74.00	31.12	100	93	Vertical	/
2	2389.9250	52.90	47.43	-5.47	74.00	26.57	100	300	Vertical	/
3	2390.0000	49.22	43.75	-5.47	74.00	30.25	100	300	Vertical	/
4	2401.7500	100.12	94.65	-5.47	74.00	-20.65	200	229	Vertical	No limit


Blank space below this page

Lowest Frequency

Frequency 2402MHz


Detector mode: Average

Polarity: Horizontal

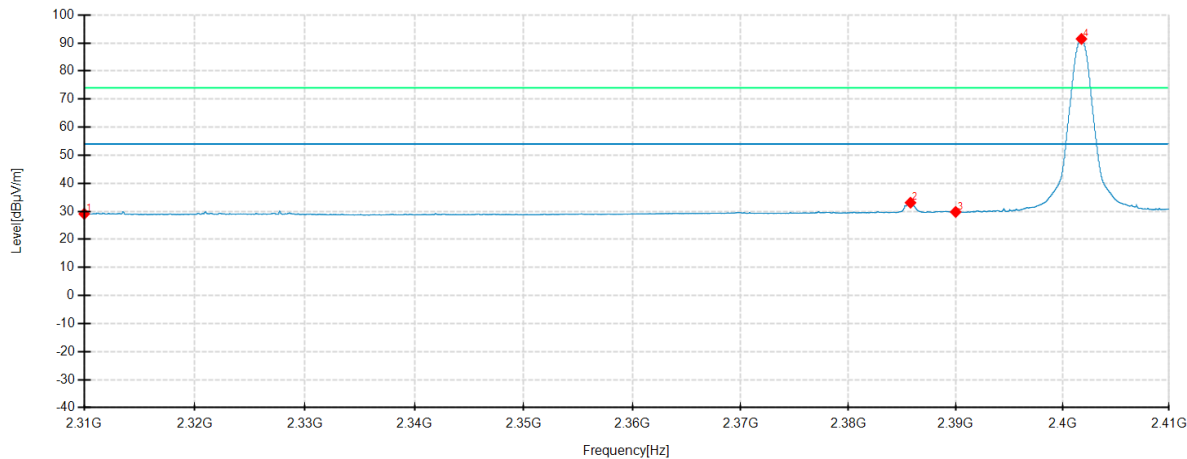

Detector mode: Average


Polarity: Vertical

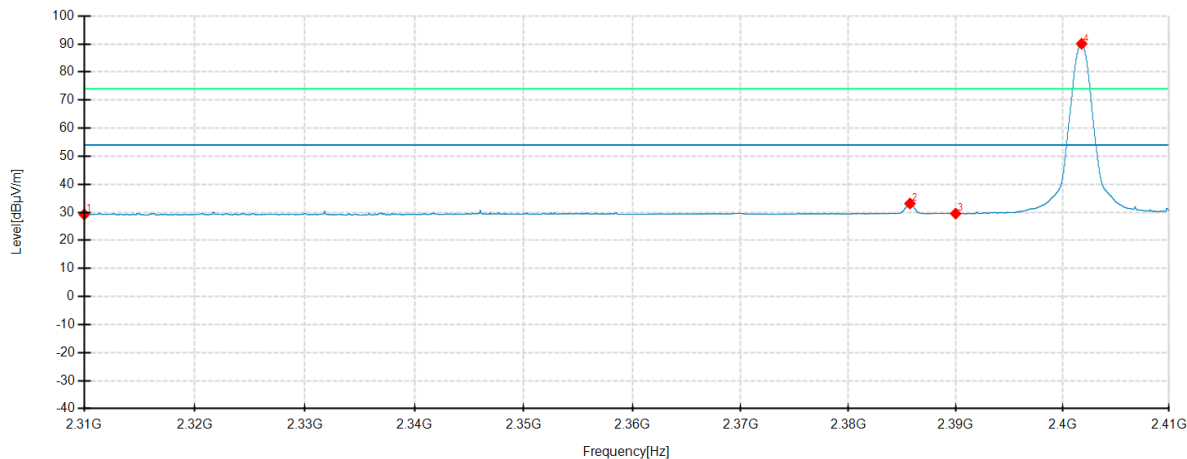

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	34.58	29.10	-5.48	54.00	24.90	100	360	Horizontal	/
2	2385.7875	38.52	33.08	-5.44	54.00	20.92	100	279	Horizontal	/
3	2390.0000	35.18	29.79	-5.39	54.00	24.21	100	292	Horizontal	/
4	2401.7750	96.71	91.46	-5.25	54.00	-37.46	100	330	Horizontal	No limit
1	2310.0000	34.56	29.24	-5.32	54.00	24.76	100	340	Vertical	/
2	2385.7375	38.61	33.14	-5.47	54.00	20.86	100	81	Vertical	/
3	2390.0000	35.01	29.54	-5.47	54.00	24.46	100	67	Vertical	/
4	2401.7875	95.55	90.09	-5.46	54.00	-36.09	100	28	Vertical	No limit


Highest Frequency
Frequency 2480MHz
Detector mode: Peak

Polarity: Horizontal

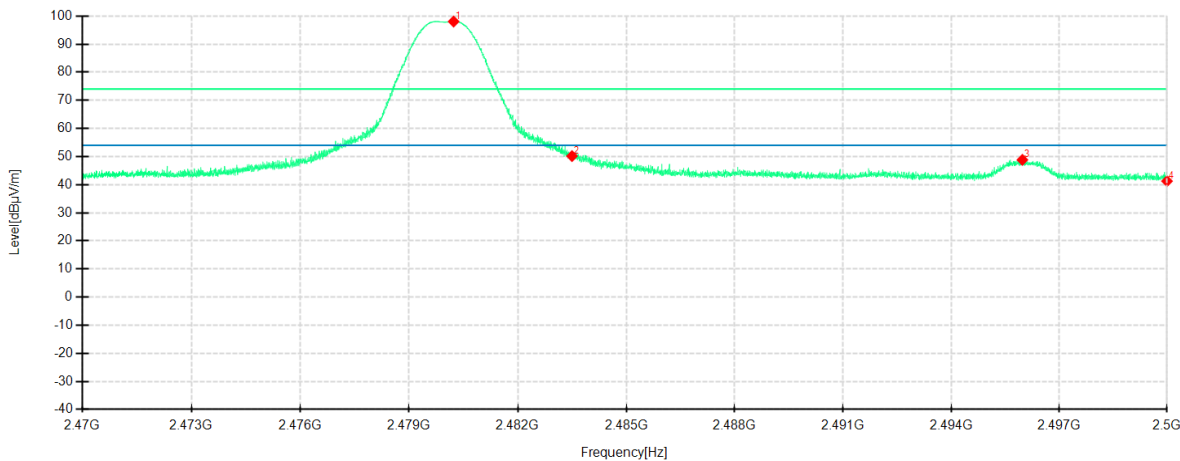

Detector mode: Peak


Polarity: Vertical

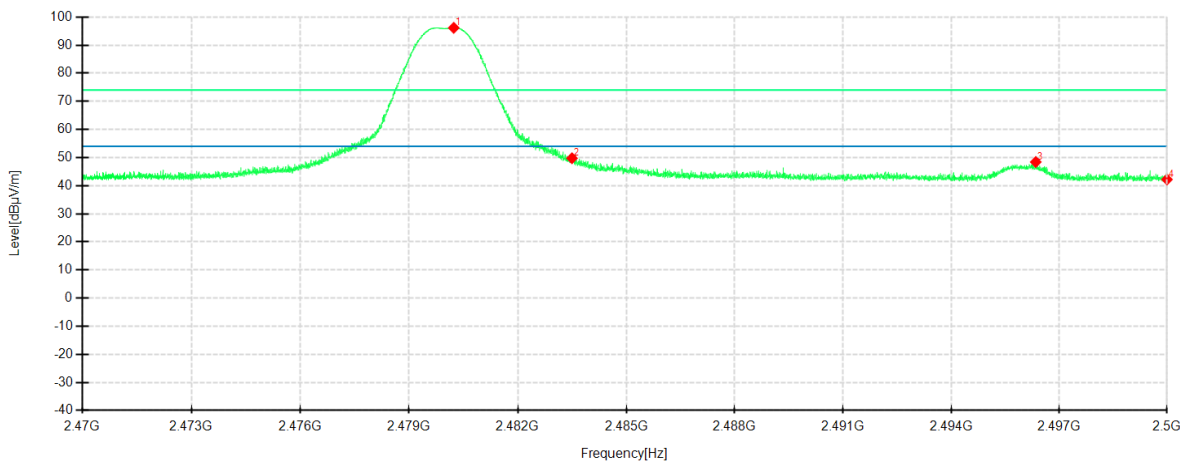

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2480.2300	102.86	98.05	-4.81	74.00	-24.05	200	314	Horizontal	No limit
2	2483.5000	55.00	50.17	-4.83	74.00	23.83	200	30	Horizontal	/
3	2495.9800	53.78	48.83	-4.95	74.00	25.17	200	314	Horizontal	/
4	2500.0000	46.25	41.26	-4.99	74.00	32.74	100	240	Horizontal	/
1	2480.2338	101.25	96.16	-5.09	74.00	-22.16	100	184	Vertical	No limit
2	2483.5000	54.82	49.75	-5.07	74.00	24.25	100	341	Vertical	/
3	2496.3513	53.42	48.42	-5.00	74.00	25.58	100	5	Vertical	/
4	2500.0000	47.20	42.21	-4.99	74.00	31.79	200	306	Vertical	/


Highest Frequency
Frequency 2480MHz
Detector mode: Average

Polarity: Horizontal

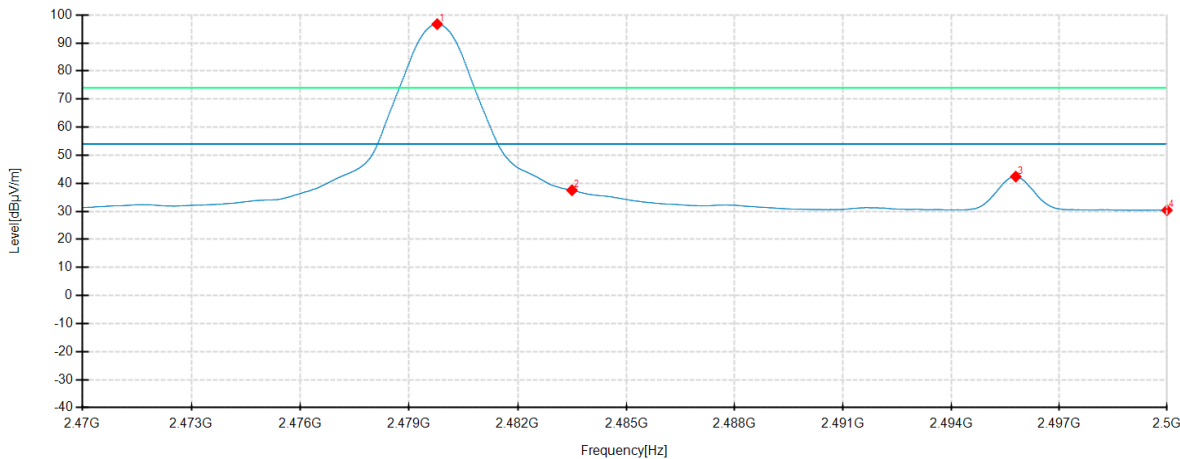

Detector mode: Average


Polarity: Vertical

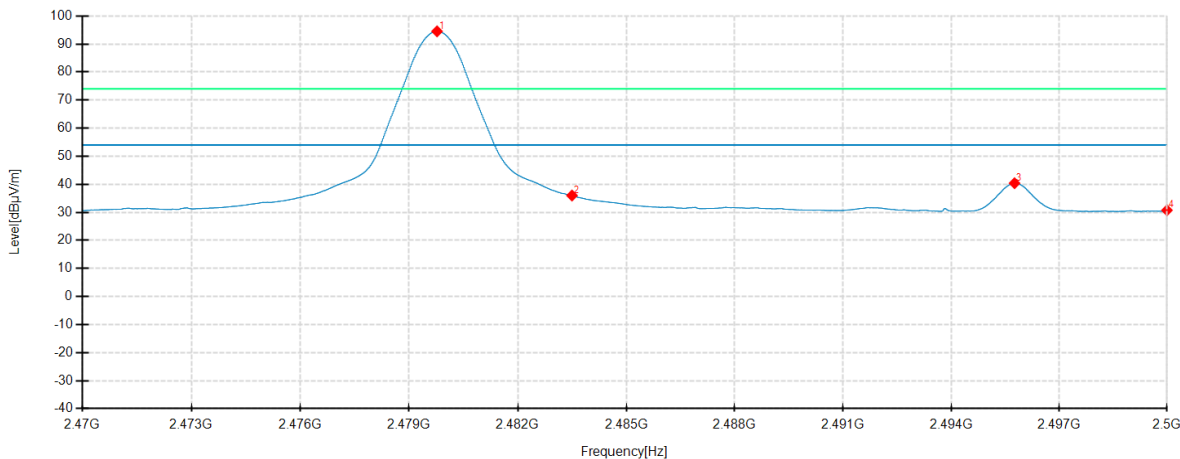

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2479.7763	101.54	96.73	-4.81	54.00	-42.73	100	19	Horizontal	No limit
2	2483.5000	42.34	37.51	-4.83	54.00	16.49	200	328	Horizontal	/
3	2495.7963	47.32	42.37	-4.95	54.00	11.63	100	317	Horizontal	/
4	2500.0000	35.40	30.41	-4.99	54.00	23.59	100	330	Horizontal	/
1	2479.7725	99.62	94.53	-5.09	54.00	-40.53	100	108	Vertical	No limit
2	2483.5000	41.07	36.00	-5.07	54.00	18.00	200	149	Vertical	/
3	2495.7625	45.39	40.38	-5.01	54.00	13.62	100	161	Vertical	/
4	2500.0000	35.73	30.74	-4.99	54.00	23.26	100	341	Vertical	/


BLE 2M
Lowest Frequency
Frequency 2402MHz
Detector mode: Peak

Polarity: Horizontal

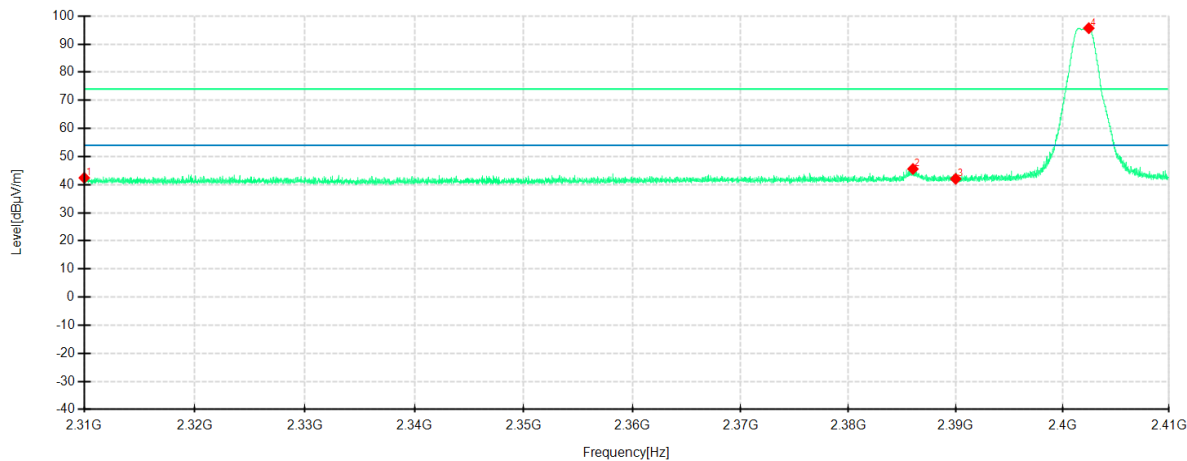

Detector mode: Peak

Polarity: Vertical

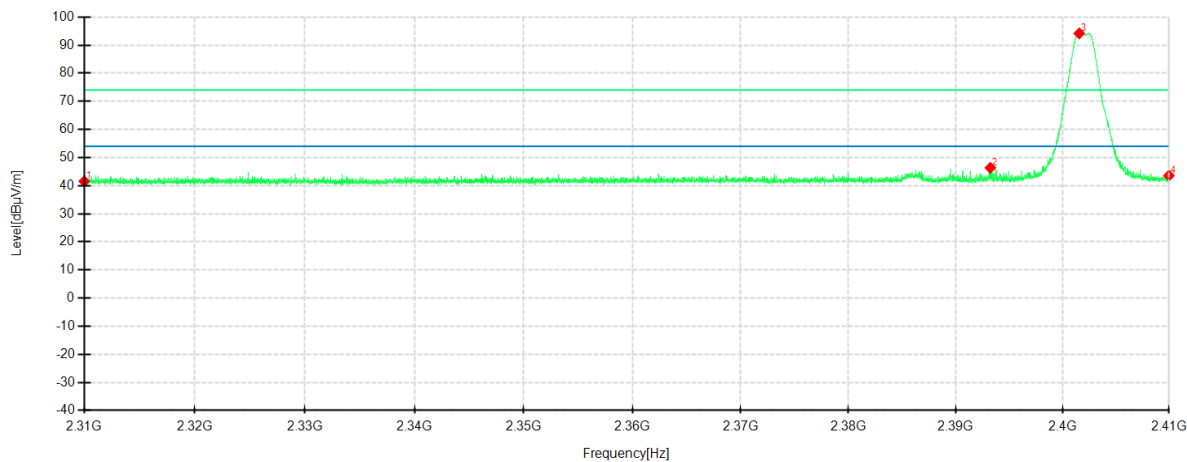


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	47.91	42.43	-5.48	74.00	31.57	200	311	Horizontal	/
2	2386.0125	51.03	45.59	-5.44	74.00	28.41	100	314	Horizontal	/
3	2390.0000	47.46	42.07	-5.39	74.00	31.93	100	250	Horizontal	/
4	2402.4625	100.91	95.68	-5.23	74.00	-21.68	200	311	Horizontal	No limit
1	2310.0000	46.87	41.55	-5.32	74.00	32.45	200	20	Vertical	/
2	2393.2375	51.82	46.35	-5.47	74.00	27.65	200	304	Vertical	/
3	2401.5625	99.65	94.18	-5.47	74.00	-20.18	200	226	Vertical	/
4	2410.0000	48.99	43.57	-5.42	74.00	30.43	100	341	Vertical	No limit

Lowest Frequency

Frequency 2402MHz


Detector mode: Average

Polarity: Horizontal

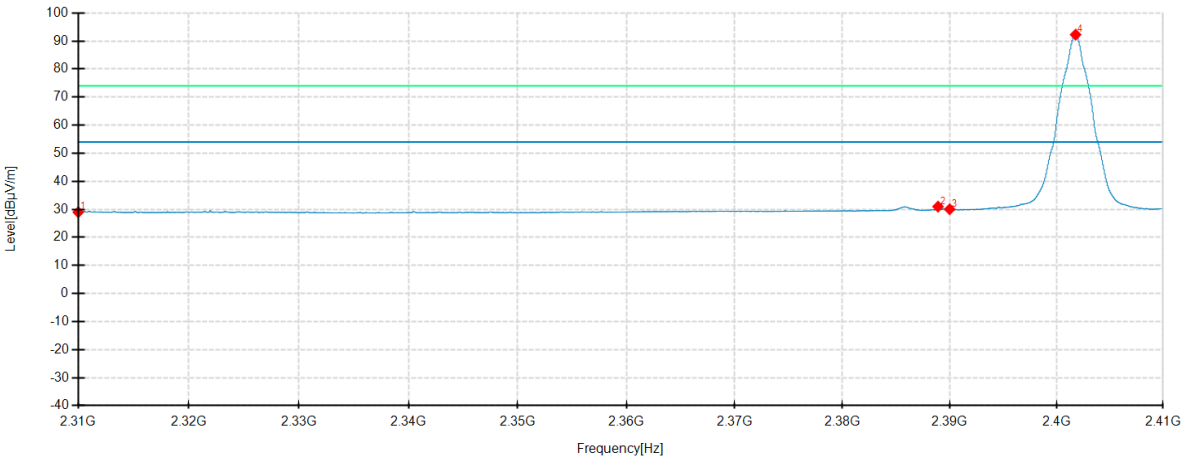

Detector mode: Average


Polarity: Vertical

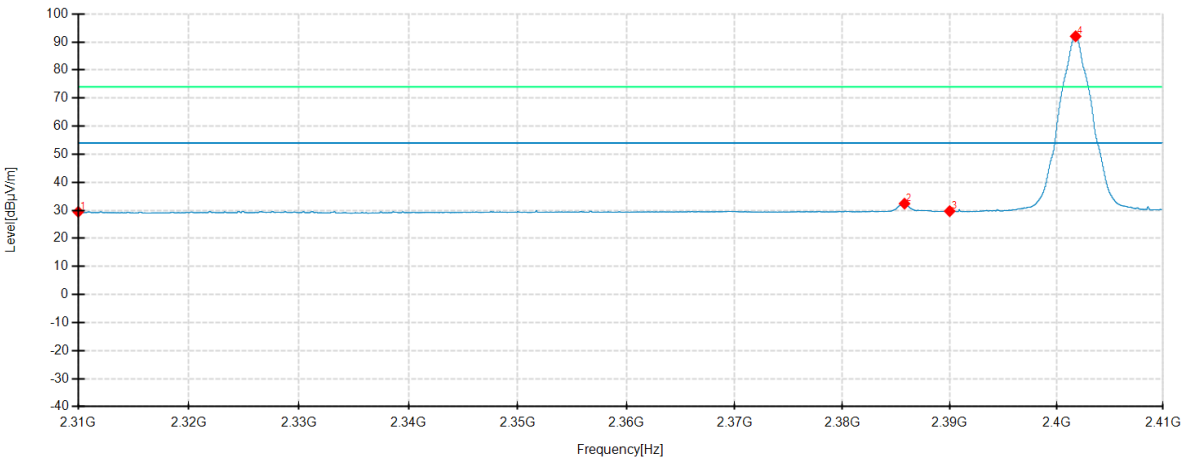

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	34.45	28.97	-5.48	54.00	25.03	200	341	Horizontal	/
2	2388.9125	36.37	30.97	-5.40	54.00	23.03	100	292	Horizontal	/
3	2390.0000	35.42	30.03	-5.39	54.00	23.97	100	292	Horizontal	/
4	2401.7875	97.51	92.27	-5.24	54.00	-38.27	200	30	Horizontal	No limit
1	2310.0000	34.77	29.45	-5.32	54.00	24.55	200	360	Vertical	/
2	2385.7875	37.85	32.38	-5.47	54.00	21.62	100	81	Vertical	/
3	2390.0000	35.19	29.72	-5.47	54.00	24.28	100	68	Vertical	/
4	2401.7875	97.51	92.05	-5.46	54.00	-38.05	200	18	Vertical	No limit


Highest Frequency
Frequency 2480MHz
Detector mode: Peak

Polarity: Horizontal

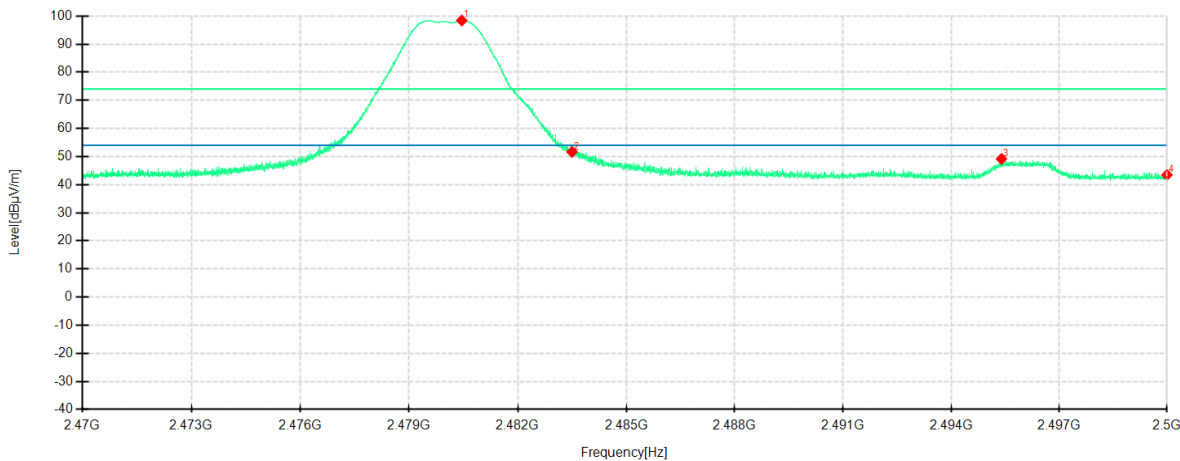

Detector mode: Peak

Polarity: Vertical

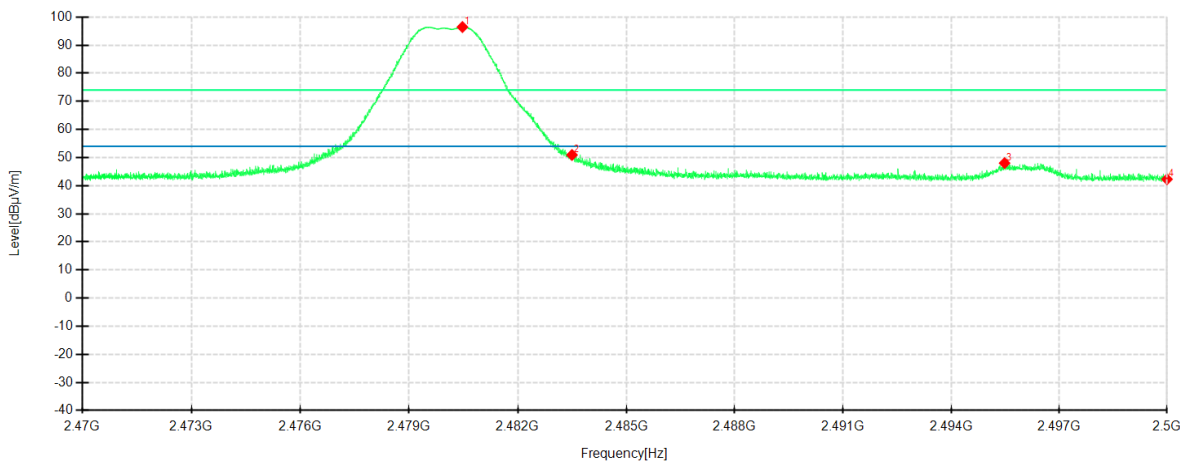


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2480.4550	103.22	98.41	-4.81	74.00	-24.41	100	318	Horizontal	No limit
2	2483.5000	56.49	51.66	-4.83	74.00	22.34	200	314	Horizontal	/
3	2495.3988	54.09	49.15	-4.94	74.00	24.85	200	28	Horizontal	/
4	2500.0000	48.47	43.48	-4.99	74.00	30.52	100	242	Horizontal	/
1	2480.4738	101.54	96.45	-5.09	74.00	-22.45	100	185	Vertical	No limit
2	2483.5000	56.00	50.93	-5.07	74.00	23.07	100	248	Vertical	/
3	2495.4850	53.04	48.03	-5.01	74.00	25.97	100	185	Vertical	/
4	2500.0000	47.28	42.29	-4.99	74.00	31.71	100	27	Vertical	/

Highest Frequency

Frequency 2480MHz


Detector mode: Average

Polarity: Horizontal

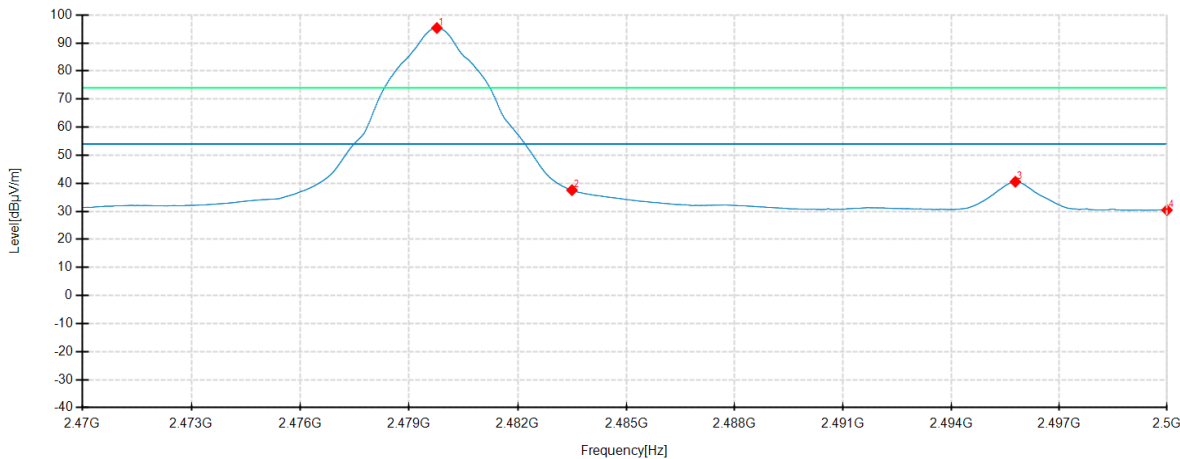

Detector mode: Average

Polarity: Vertical

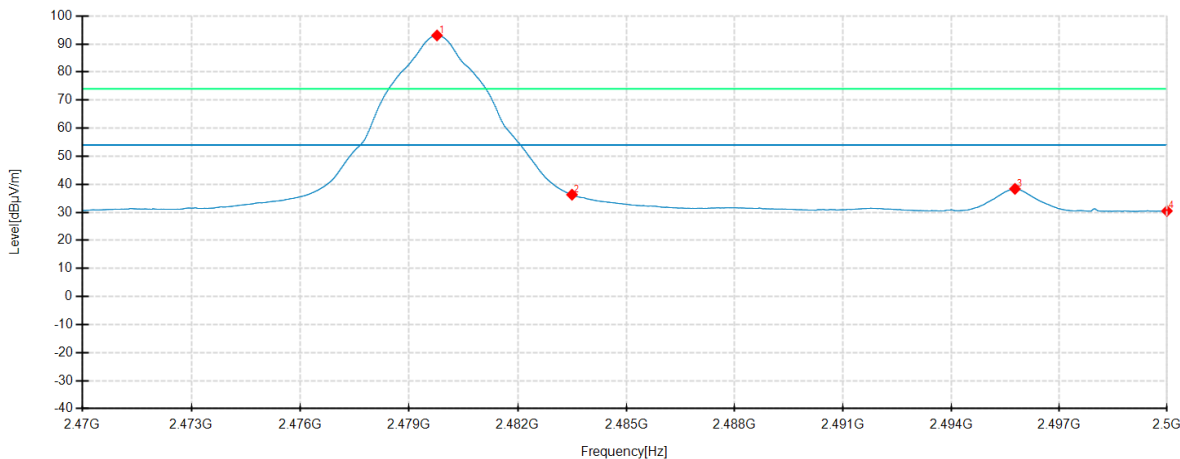

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2479.7688	100.16	95.35	-4.81	54.00	-41.35	100	20	Horizontal	No limit
2	2483.5000	42.38	37.55	-4.83	54.00	16.45	200	328	Horizontal	/
3	2495.7850	45.50	40.55	-4.95	54.00	13.45	100	316	Horizontal	/
4	2500.0000	35.42	30.43	-4.99	54.00	23.57	100	329	Horizontal	/
1	2479.7725	98.15	93.06	-5.09	54.00	-39.06	100	107	Vertical	No limit
2	2483.5000	41.35	36.28	-5.07	54.00	17.72	200	147	Vertical	/
3	2495.7738	43.37	38.36	-5.01	54.00	15.64	100	160	Vertical	/
4	2500.0000	35.47	30.48	-4.99	54.00	23.52	100	341	Vertical	/

Remark: Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM

Please refer to the attached document E20240624383901-FCC Test Photo.

APPENDIX B. PHOTOGRAPH OF THE EUT

Please refer to the attached document E20240624383901-EUT photo.

----- End of Report -----