

1. Antenna Description:

Antenna type	PIFA antenna
Model	TAB P11
Frequency range	2400-2500MHz, 5180MHz-5240MHz, 5745MHz-5825MHz
Manufacturer	Shenzhen Ployer Electronics Co.,ltd.
ANT Peak Gain	2400-2500MHz: 1.84 dBi 5180MHz-5240MHz: 1.32dBi 5745MHz-5825MHz : 1.25 dBi

2. Antenna Photo:

Length :20.75mm
Width:25.72mm



3. Test Equipment & Conditions

3.1 Test instrument

VSWR is tested using Agilent E5071B connected to a hand mechanism, and the status is free space.

3.2 Test environment and methods


Dark room specifications: ETS-743

TD-SCDMA test equipment: StarPoint SP6010/Agilent 8960


LTE-TDD/FDD-SCDMA test equipment: StarPoint SP8011/CMW500

WCDMA/GSM/CDMA test equipment: Agilent 8960


Passive efficiency testing equipment: Agilent Technologies E5071B

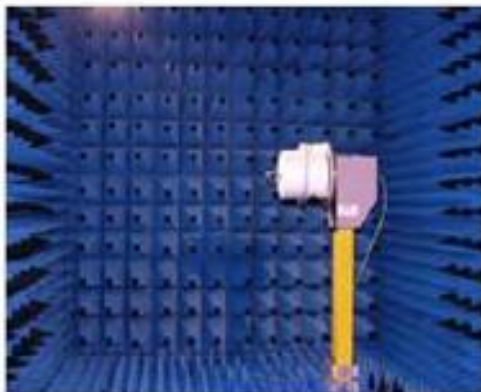


4 . Antenna Radiation Pattern




2400MHz

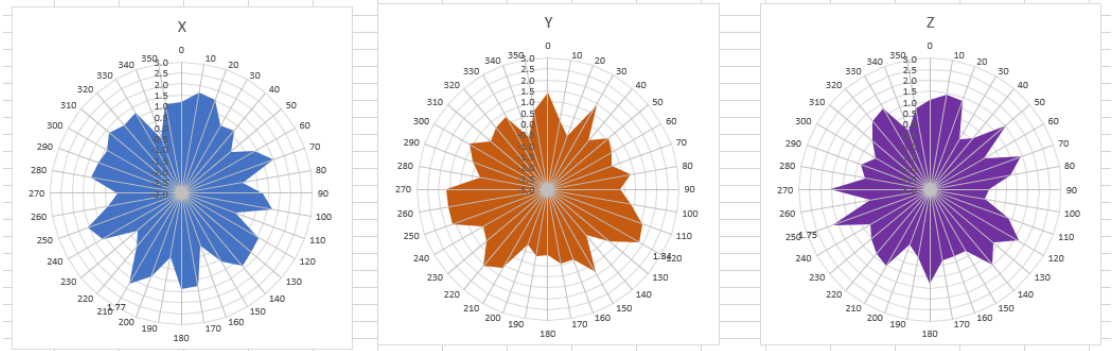


2450MHz

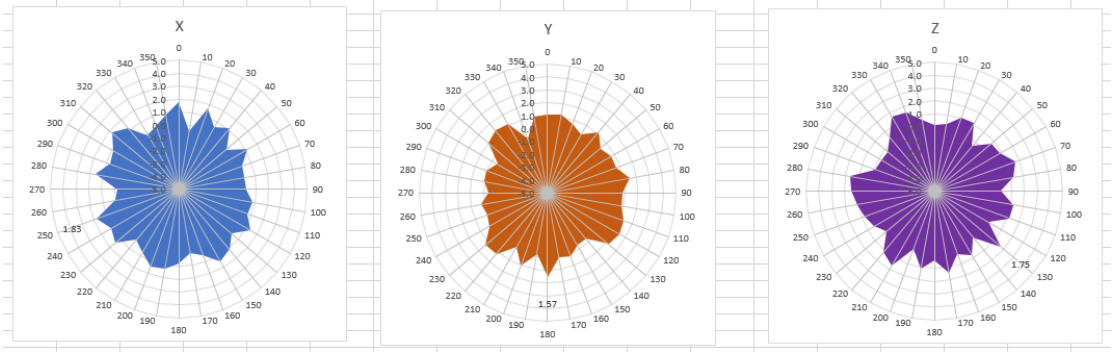


2500MHz

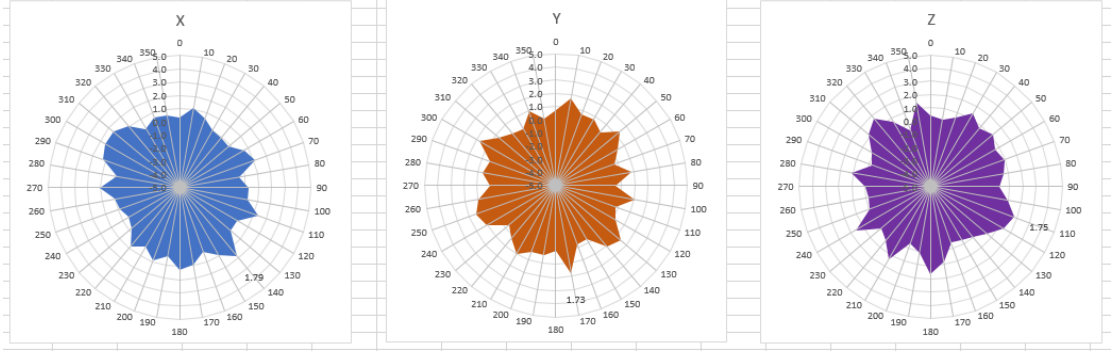



5180MHz

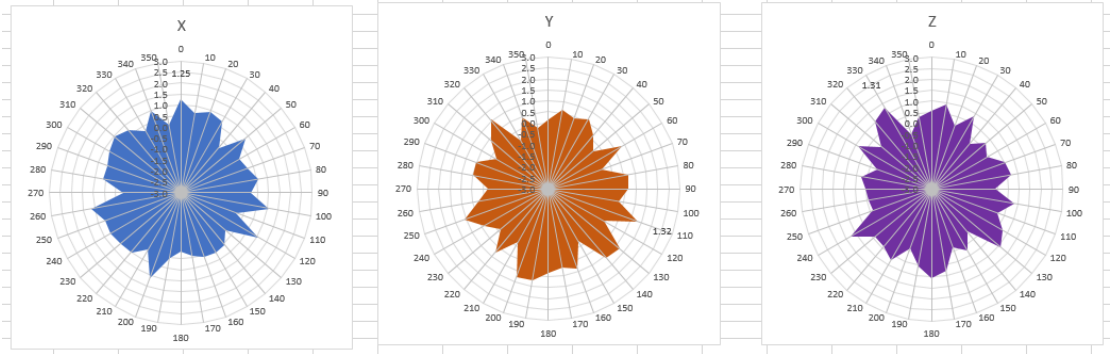


5220MHz

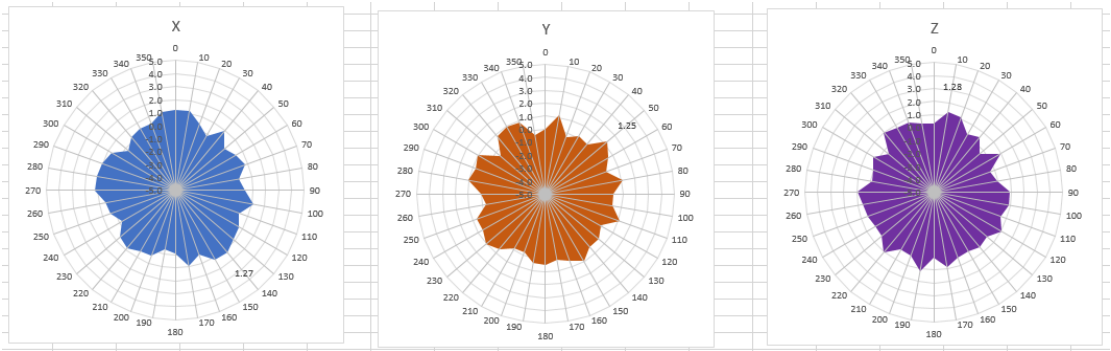


5240MHz

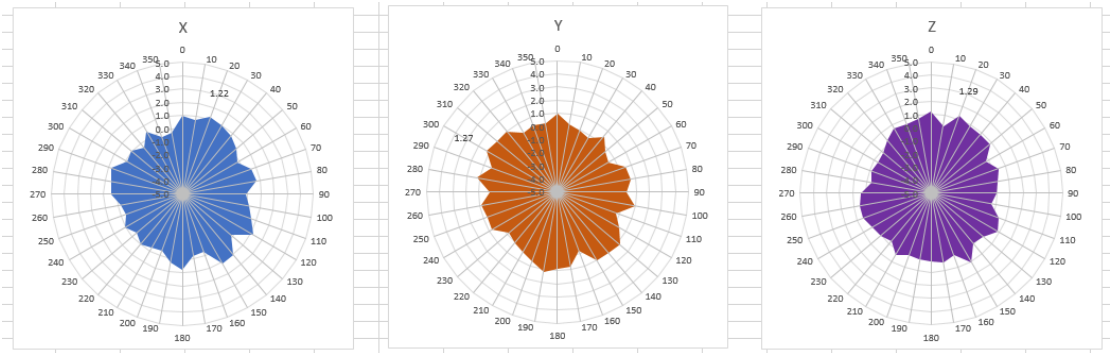

5745MHz

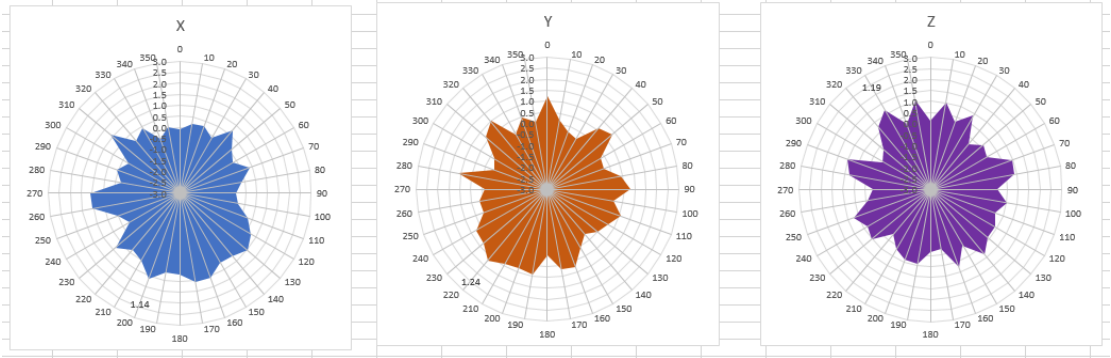

5785MHz

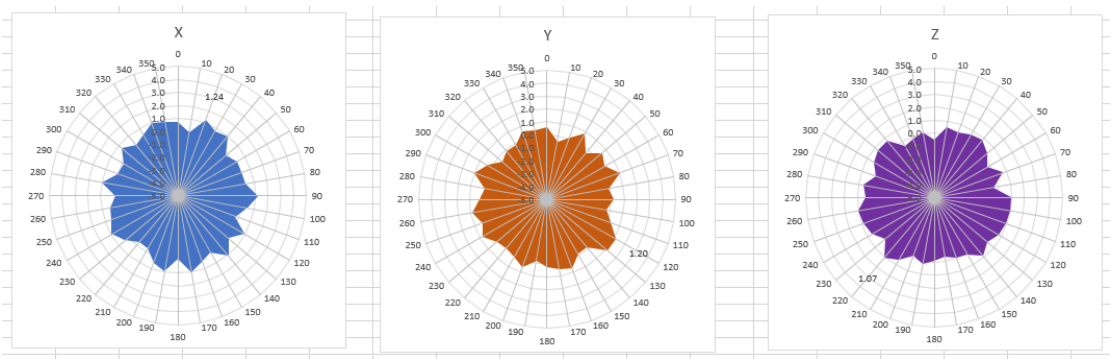

5825MHz

