



CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3

TEST REPORT

For

Control Box

MODEL NUMBER: BG101

REPORT NUMBER: 4791228123-1-RF-1

ISSUE DATE: April 24, 2024

FCC ID: 2BHT9BG101 IC: 32777-BG101

Prepared for

Company Name: BEDGEAR LLC
Address: 200 Sea Lane Farmingdale NY 11735 USA

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

> Tel: +86 769 22038881 Fax: +86 769 33244054 Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.



Page 2 of 87

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	April 24, 2024	Initial Issue	



Page 3 of 87

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.1.3	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.2	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

^{*}This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

^{*}The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C

ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.



CONTENTS

1. ATT	ESTATION OF TEST RESULTS	6
2. TES	T METHODOLOGY	7
3. FAC	ILITIES AND ACCREDITATION	7
4. CAL	IBRATION AND UNCERTAINTY	8
<i>4</i> .1.	MEASURING INSTRUMENT CALIBRATION	8
4.2.	MEASUREMENT UNCERTAINTY	8
5. EQU	IPMENT UNDER TEST	9
5.1.	DESCRIPTION OF EUT	9
5.2.	CHANNEL LIST	9
5.3.	MAXIMUM POWER	9
<i>5.4.</i>	TEST CHANNEL CONFIGURATION	9
5.5.	THE WORSE CASE POWER SETTING PARAMETER	10
5.6.	DESCRIPTION OF AVAILABLE ANTENNAS	10
5.7.	SUPPORT UNITS FOR SYSTEM TEST	11
6. MEA	SURING EQUIPMENT AND SOFTWARE USED	12
7. ANT	ENNA PORT TEST RESULTS	15
7.1.	CONDUCTED OUTPUT POWER	15
7.2.	6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	16
7.3.	POWER SPECTRAL DENSITY	18
7.4.	CONDUCTED BAND EDGE AND SPURIOUS EMISSION	20
7.5.	DUTY CYCLE	22
8. RAD	NATED TEST RESULTS	23
8.1.	RESTRICTED BANDEDGE	31
8.2.	SPURIOUS EMISSIONS(1 GHZ~3 GHZ)	38
8.3.	SPURIOUS EMISSIONS(3 GHZ~18 GHZ)	44
8.4.	SPURIOUS EMISSIONS(9 KHZ~30 MHZ)	56
8.5.	SPURIOUS EMISSIONS(18 GHZ~26 GHZ)	59
8.6.	SPURIOUS EMISSIONS(30 MHZ~1 GHZ)	61
9. ANT	ENNA REQUIREMENT	63
10.	AC POWER LINE CONDUCTED EMISSION	64
11.	TEST DATA	67
11.1.	APPENDIX A MAXIMUM CONDUCTED OUTPUT POWER	67
11.2.	APPENDIX B -6DB BANDWIDTH	68



REPORT NO.: 4791228123-1-RF-1 Page 5 of 87



Page 6 of 87

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: BEDGEAR LLC

Address: 200 Sea Lane Farmingdale NY 11735 USA

Manufacturer Information

Company Name: BEDGEAR LLC

Address: 200 Sea Lane Farmingdale NY 11735 USA

EUT Information

EUT Name: Control Box
Model: BG101
Brand: BEDGEAR
Sample Received Date: April 3, 2024
Sample Status: Normal
Sample ID: 7083979

Date of Tested: April 10, 2024 to April 24, 2024

APPLICABLE STANDARDS			
STANDARD	TEST RESULTS		
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3	Pass		

Checked By:

Kebo Zhang

Senior Project Engineer

Prepared By:
Jammy Huang
Fanny Huang
Engineer Project Associate
Approved By:
Stephen Cmo
Stephen Guo
Operations Manager



Page 7 of 87

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, ANSI C63.10-2013 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

	A2LA (Certificate No.: 4102.01)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	has been assessed and proved to be in compliance with A2LA.
	FCC (FCC Designation No.: CN1187)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	Has been recognized to perform compliance testing on equipment subject
	to the Commission's Declaration of Conformity (DoC) and Certification
	rules
	ISED (Company No.: 21320)
Accreditation	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Certificate	has been registered and fully described in a report filed with ISED.
	The Company Number is 21320 and the test lab Conformity Assessment
	Body Identifier (CABID) is CN0046.
	VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	has been assessed and proved to be in compliance with VCCI, the
	Membership No. is 3793.
	Facility Name:
	Chamber D, the VCCI registration No. is G-20192 and R-20202
	Shielding Room B, the VCCI registration No. is C-20153 and T-20155

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



Page 8 of 87

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty	
Conduction emission	3.62 dB	
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB	
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB	
Radiated Emission	5.78 dB (1 GHz ~ 18 GHz)	
(Included Fundamental Emission) (1 GHz to 26 GHz)	5.23 dB (18 GHz ~ 26 GHz)	
Duty Cycle	±0.028%	
DTS and 99% Occupied Bandwidth	±0.0196%	
Maximum Conducted Output Power	±0.686 dB	
Maximum Power Spectral Density Level	±0.743 dB	
Conducted Band-edge Compliance	±1.328 dB	
Conducted Unwanted Emissions In Non-restricted	±0.746 dB (9 kHz ~ 1 GHz)	
Frequency Bands	±1.328dB (1 GHz ~ 26 GHz)	

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Page 9 of 87

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Control Box
Model	BG101

Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Data Rates:	1Mbps/2Mbps
Normal Test Voltage:	DC 5V

5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2466	1	/

5.3. MAXIMUM POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)
LE 1M	2402 ~ 2480	0-39[40]	7.99
LE 2M	2402 ~ 2480	0-39[40]	7.98

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency	
LE 1M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz	
LE 2M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz	



Page 10 of 87

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Softwar	e Version	Simplicity Studio					
Modulation	Transmit	Test Software setting value					
Туре	Antenna Number	CH 0	CH 19	CH 39			
GFSK(1Mbps)	1	default	default	default			
GFSK(2Mbps)	1	default	default	default			

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB onboard antenna	2.81

Test Mode	Transmit and Receive Mode	Description
LE 1M	⊠1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 2M	⊠1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.



Page 11 of 87

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	Dummy load	/	/	1
3	Adapter	SOY	SUN-0500200- 090-A	Input:100~240 Vac, 50/60Hz, 0.5A Output: 5 Vdc, 2 A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

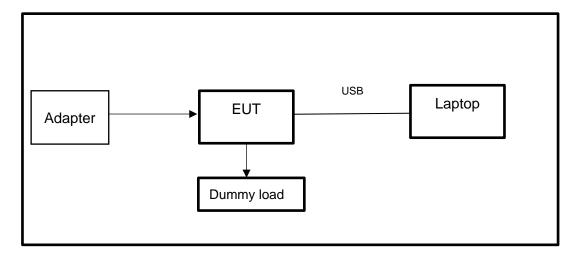



Page 12 of 87

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System										
Equipment Mar			nufac		Model		Serial No.	Last 0	Cal.	Due. Date
Power sensor, Power M	leter		R&S	3	OSP1	20	100921	Mar.25,	2024	Mar.24,2025
Vector Signal Genera	tor		R&S		SMBV1	00A	261637	Oct.12,	2023	Oct.11, 2024
Signal Generator			R&S	3	SMB10	00A	178553	Oct.12,	2023	Oct.11, 2024
Signal Analyzer			R&S	3	FSV4	10	101118	Oct.12,	2023	Oct.11, 2024
					Softwa	re				
Description			N	/lanuf	acturer		Nam	е		Version
For R&S TS 8997 Test	Syste	em	Rol	hde &	Schwar	Z	EMC	32		10.60.10
Tonsend RF Test System										
Equipment	Man	ufac	turer	Mod	del No.	S	Serial No.	I No. Last C		Due. Date
Wideband Radio Communication Tester		R&S	3	CM	W500		155523	Oct.12,	2023	Oct.11, 2024
Wireless Connectivity Tester		R&S	3	СМ	W270	120	1.0002N75- 102	Sep.25,	2023	Sep.24, 2024
PXA Signal Analyzer	Ke	eysig	ght	N9	030A	MY	′55410512	Oct.12,	2023	Oct.11, 2024
MXG Vector Signal Generator	Ke	eysig	ght	N5	182B	MY	′56200284	Oct.12,	2023	Oct.11, 2024
MXG Vector Signal Generator	Ke	eysig	ght	N5	172B	MY	′56200301	Oct.12,	2023	Oct.11, 2024
DC power supply	Ke	eysig	ght	E3	642A	MY	′ 55159130	Oct.12,	2023	Oct.11, 2024
Temperature & Humidity Chamber	SAI	VMC	OOD	SG-8	30-CC-2		2088	Oct.12,	2023	Oct.11, 2024
Attenuator	А	glient 84		195B	28	14a12853	Oct.12, 2023		Oct.11, 2024	
RF Control Unit	То	nsce	end	JS0806-2		23B80620666 Mar.25,2		2024	Mar.24,2025	
					Softwa	re				
Description		Man	nufact	urer	Name				Version	
Tonsend SRD Test Sys	tem	To	onser	nd	JS1	120-	3 RF Test S	ystem		V3.2.22



Page 13 of 87

Conducted Emissions								
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date			
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024			
Two-Line V- Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024			
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024			
	Software							
	Description		Manufacturer	Name	Version			
Test Software	for Conducted	Emissions	Farad	EZ-EMC	Ver. UL-3A1			

Radiated Emissions								
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date			
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024			
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024			
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024			
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024			
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024			
Preamplifier	TDK	PA-02-0118	TRS-305- 00067	Oct.12, 2023	Oct.11, 2024			
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024			
Preamplifier	TDK	PA-02-2	TRS-307- 00003	Oct.12, 2023	Oct.11, 2024			
Preamplifier	TDK	PA-02-3	TRS-308- 00002	Oct.12, 2023	Oct.11, 2024			
Loop antenna	Schwarzbeck	1519B	80000	Dec.14, 2021	Dec.13, 2024			
Preamplifier	TDK	PA-02-001- 3000	TRS-302- 00050	Oct.12, 2023	Oct.11, 2024			
High Pass Filter	Wi	WHKX10- 2700-3000- 18000-40SS	23	Oct.12, 2023	Oct.11, 2024			
Band Reject Filter	Wainwright	WRCJV8- 2350-2400- 2483.5- 2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024			
	Software							
]	Description		Manufacturer	Name	Version			
Test Software	for Radiated E	missions	Farad	EZ-EMC	Ver. UL-3A1			



Page 14 of 87

Other Instrument								
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date			
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024			
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024			
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024			



Page 15 of 87

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS


CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3							
Section Test Item Limit Frequency Range (MHz)							
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	Peak Conduct Output Power	1 watt or 30 dBm	2400-2483.5				

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.5°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

_			
Test Date	April 15, 2024	Test By	Kebo Zhang
וו כאו שמוכ	April 13, 2024	I CSL DV	Nebu Zhang
	1 '	J	

TEST RESULTS

Please refer to section "Test Data" - Appendix A

Page 16 of 87

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section Test Item Limit Frequency Range (MHz)			
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a) 6 dB Bandwidth ≥ 500 kHz 2400		2400-2483.5	
ISED RSS-Gen Clause 6.7 99 % Occupied For reporting purposes only. 2400-2483.5			

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
IRRW/	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
IV/R/W	For 6 dB Bandwidth: ≥3 × RBW For 99 % Occupied Bandwidth: ≥3 × RBW
Trace	Max hold
Sweep	Auto couple

- a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP





Page 17 of 87

TEST ENVIRONMENT

Temperature	24.6°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	April 15, 2024	Test By	Kebo Zhang
-----------	----------------	---------	------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B&C



Page 18 of 87

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section Test Item Limit Frequency Rang (MHz)			Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	3 kHz ≤ RBW ≤ 100 kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.6°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	April 15, 2024	Test Bv	Kebo Zhang
1 COL Date	7 (PIII 10, 202 1	1 Cot Dy	1 tobo Zhang



Page 19 of 87

TEST RESULTS

Please refer to section "Test Data" - Appendix D



Page 20 of 87

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section Test Item Limit			
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power	

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:


Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	≥3 × RBW
measurement points	≥span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.



Page 21 of 87

TEST SETUP



TEST ENVIRONMENT

Temperature	24.6°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

			,
T (D)	A '1 4 5 000 4	T . D	17 1 71
Test Date	April 15, 2024	Test By	Kebo Zhang
1 oot Dato	p. (p. 11 10, 202 1	1 001 Dy	rtobo Enang

TEST RESULTS

Please refer to section "Test Data" - Appendix E&F



Page 22 of 87

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.6°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	April 15, 2024	Test Bv	Kebo Zhang
	, .pe, _e		

TEST RESULTS

Please refer to section "Test Data" - Appendix G



Page 23 of 87

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range	Field Strength Limit	Field Streng	gth Limit
(MHz)	(uV/m) at 3 m	(dBuV/m)	at 3 m
			'eak
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
Above 1000	500	74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

REPORT NO.: 4791228123-1-RF-1 Page 24 of 87

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	158.52475 - 158.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
8.26775 - 6.26825	960 - 1427	31.2 - 31.8
8.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5480	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 – 138		
1-4-4-0-4-5-	ds listed in table 7 and in bands above 38.6	011

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: 1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. 2 Above 38.6c

TEST PROCEDURE

Below 30 MHz



Page 25 of 87

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

- 1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
- 2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 80 cm above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
- 5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
- 6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode remeasured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
- 7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
- 8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to Y-51.5 = Z dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.



Page 26 of 87

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 80 cm above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.




Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
1/18///	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 1.5 m above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
- 6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

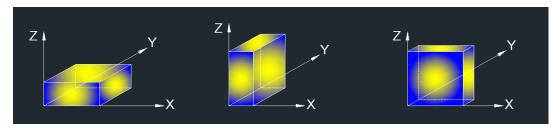

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.



REPORT NO.: 4791228123-1-RF-1 Page 28 of 87

For Restricted Bandedge:

Note:

- 1. Measurement = Reading Level + Correct Factor.
- 2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
- 3. PK=Peak: Peak detector.
- 4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
- 5. For the transmitting duration, please refer to clause 7.5.
- 6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
- 7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
- 8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

- 1. Measurement = Reading Level + Correct Factor.
- 2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
- 3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
- 4. All modes have been tested, but only the worst data was recorded in the report.
- 5. $dBuA/m = dBuV/m 20Log10[120\pi] = dBuV/m 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

- 1. Result Level = Read Level + Correct Factor.
- 2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
- 3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

- 1. Measurement = Reading Level + Correct Factor.
- 2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
- 3. Peak: Peak detector.
- 4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
- 5. For the transmitting duration, please refer to clause 7.5.
- 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
- 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
- 8. All modes have been tested, but only the worst data was recorded in the report.

REPORT NO.: 4791228123-1-RF-1 Page 29 of 87

For Radiate Spurious Emission (3 GHz ~ 18 GHz):


Note:

- 1. Peak Result = Reading Level + Correct Factor.
- 2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
- 3. Peak: Peak detector.
- 4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
- 5. For the transmitting duration, please refer to clause 7.5.
- 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
- 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
- 8. All modes have been tested, but only the worst data was recorded in the report.


For Radiate Spurious emission (18 GHz ~ 26 GHz): Note:

- 1. Measurement = Reading Level + Correct Factor.
- 2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
- 3. Peak: Peak detector.
- 4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

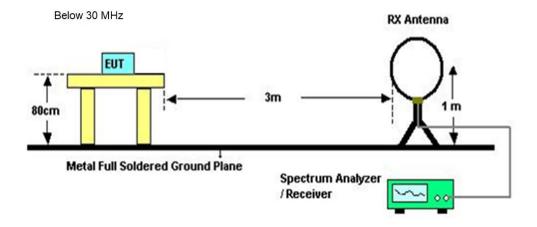

Below 1 GHz and above 30 MHz

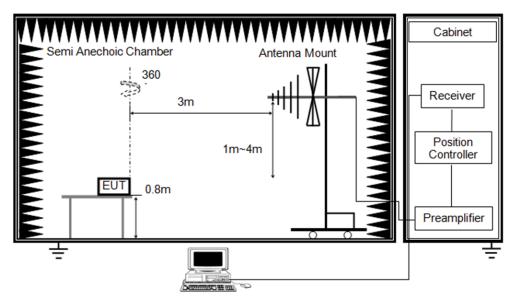

Above 1 GHz

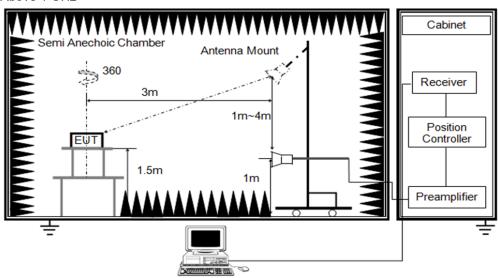

TEST ENVIRONMENT

Temperature	24.8°C	Relative Humidity	62.4%
Atmosphere Pressure	101kPa	Test Voltage	

TEST DATE / ENGINEER

Test Date	April 24, 2024	Test Bv	Mason Wang
1 CSt Date	μ (ριτί 24, 2024	1 COL Dy	iviasori vvarig
		,	


TEST RESULTS



Page 31 of 87

8.1. RESTRICTED BANDEDGE

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5V

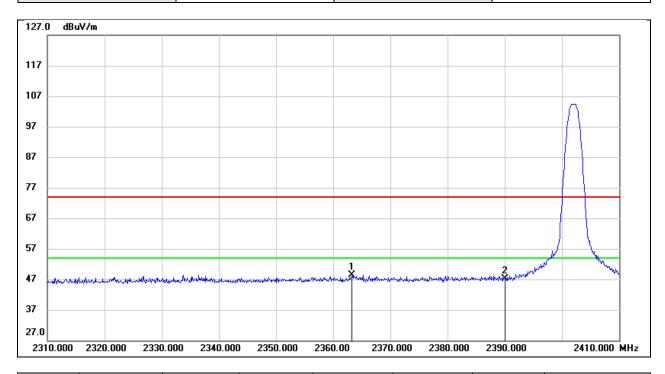


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2363.300	15.69	32.77	48.46	74.00	-25.54	peak
2	2390.000	14.17	32.92	47.09	74.00	-26.91	peak



REPORT NO.: 4791228123-1-RF-1 Page 32 of 87

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5V

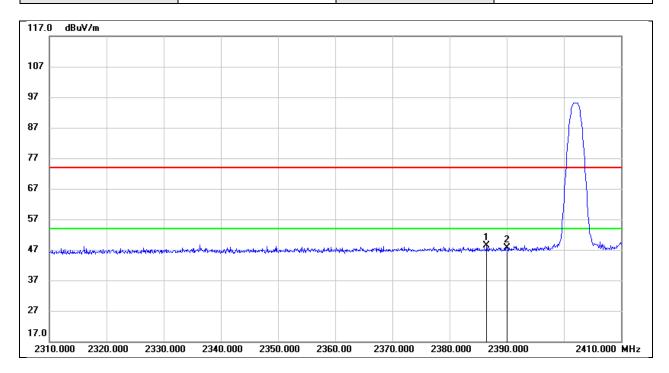


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2386.500	15.58	32.90	48.48	74.00	-25.52	peak
2	2390.000	14.76	32.92	47.68	74.00	-26.32	peak



REPORT NO.: 4791228123-1-RF-1 Page 33 of 87

Test Mode: BLE 1M PK Frequency(MHz): 2480

Polarity: Test Voltage: DC 5V

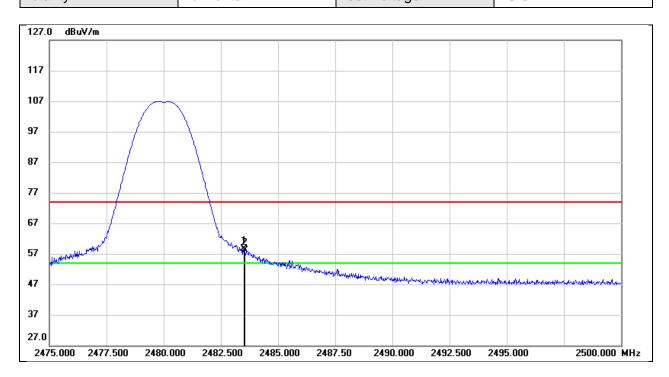


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	25.63	32.94	58.57	74.00	-15.43	peak
2	2483.550	25.10	32.94	58.04	74.00	-15.96	peak



REPORT NO.: 4791228123-1-RF-1 Page 34 of 87

Test Mode:	BLE 1M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5V

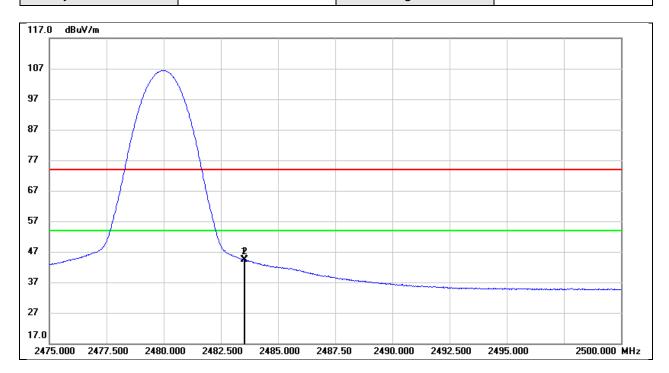


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	11.41	32.94	44.35	54.00	-9.65	AVG
2	2483.550	11.34	32.94	44.28	54.00	-9.72	AVG



REPORT NO.: 4791228123-1-RF-1 Page 35 of 87

Test Mode: BLE 2M PK Frequency(MHz): 2402
Polarity: Horizontal Test Voltage: DC 5V

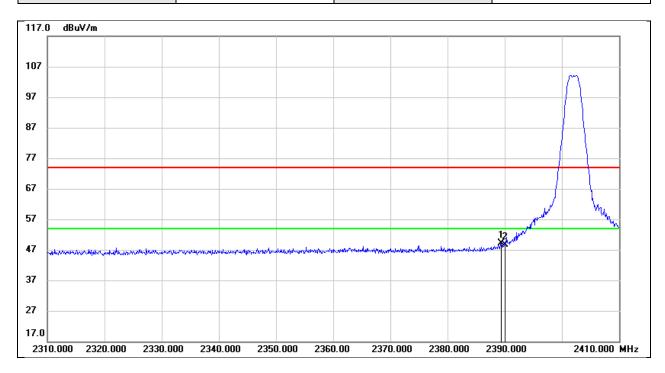


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.400	16.29	32.92	49.21	74.00	-24.79	peak
2	2390.000	15.59	32.92	48.51	74.00	-25.49	peak



Page 36 of 87

Test Mode:	BLE 2M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5V

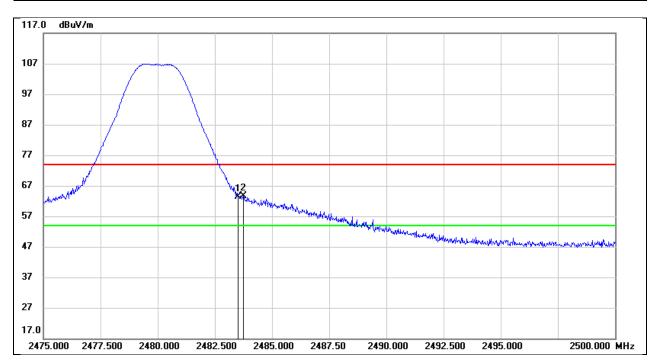


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	30.44	32.94	63.38	74.00	-10.62	peak
2	2483.750	30.66	32.94	63.60	74.00	-10.40	peak



REPORT NO.: 4791228123-1-RF-1 Page 37 of 87

Test Mode:	BLE 2M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5V

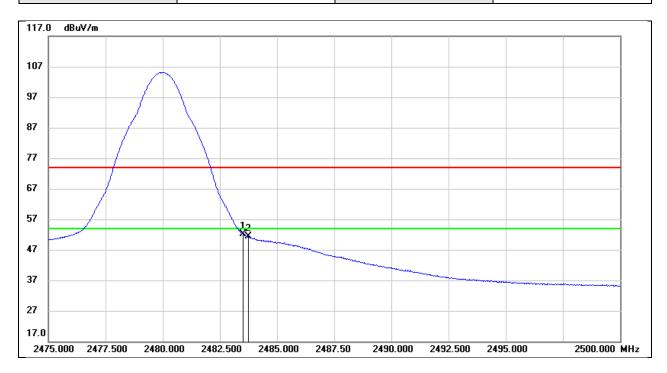


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	19.21	32.94	52.15	54.00	-1.85	AVG
2	2483.750	18.41	32.94	51.35	54.00	-2.65	AVG



Page 38 of 87

8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5V

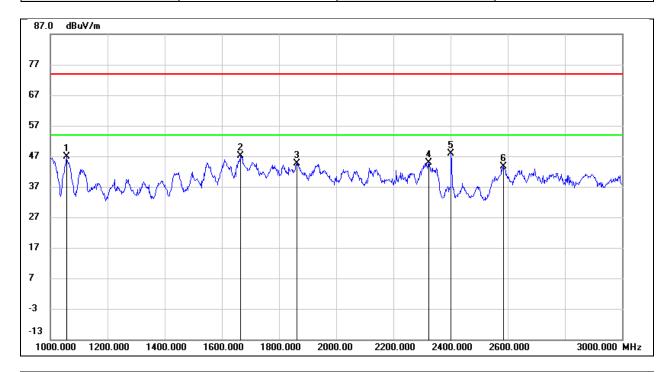


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1056.000	60.74	-13.91	46.83	74.00	-27.17	peak
2	1664.000	57.95	-10.88	47.07	74.00	-26.93	peak
3	1862.000	54.82	-10.20	44.62	74.00	-29.38	peak
4	2324.000	52.75	-7.96	44.79	74.00	-29.21	peak
5	2402.000	55.30	-7.40	47.90	/	/	fundamental
6	2586.000	51.19	-7.66	43.53	74.00	-30.47	peak



REPORT NO.: 4791228123-1-RF-1 Page 39 of 87

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5V

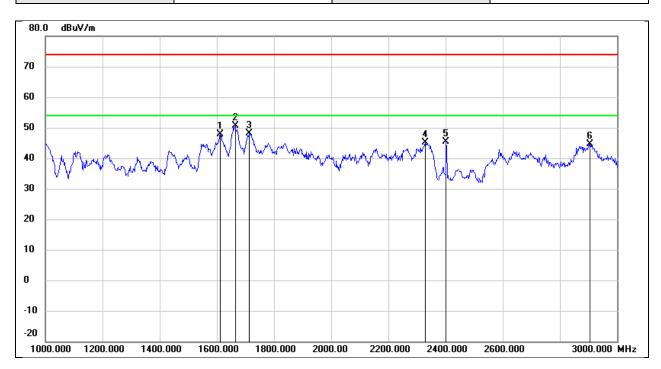


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1612.000	59.09	-11.11	47.98	74.00	-26.02	peak
2	1664.000	61.62	-10.88	50.74	74.00	-23.26	peak
3	1714.000	58.89	-10.64	48.25	74.00	-25.75	peak
4	2328.000	53.14	-7.94	45.20	74.00	-28.80	peak
5	2402.000	52.87	-7.40	45.47	/	/	fundamental
6	2906.000	50.90	-6.32	44.58	74.00	-29.42	peak



REPORT NO.: 4791228123-1-RF-1 Page 40 of 87

Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 5V

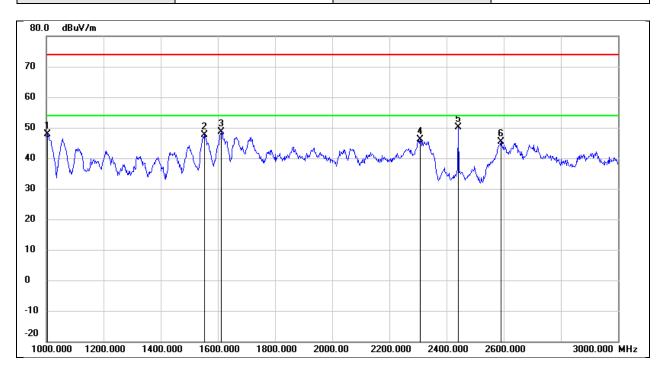


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1004.000	62.21	-14.38	47.83	74.00	-26.17	peak
2	1552.000	59.11	-11.45	47.66	74.00	-26.34	peak
3	1612.000	59.75	-11.11	48.64	74.00	-25.36	peak
4	2308.000	54.22	-8.08	46.14	74.00	-27.86	peak
5	2440.000	57.61	-7.44	50.17	/	/	fundamental
6	2590.000	53.03	-7.67	45.36	74.00	-28.64	peak



REPORT NO.: 4791228123-1-RF-1 Page 41 of 87


Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 5V

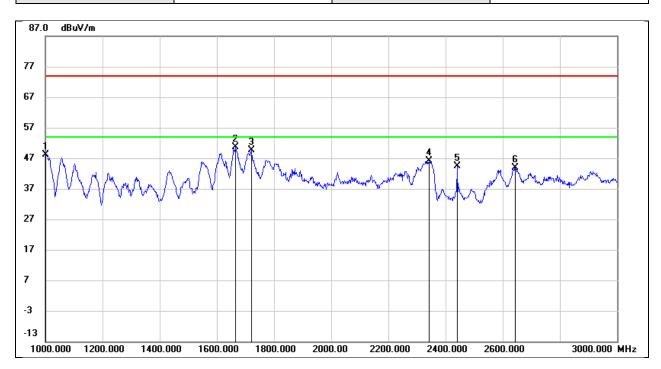

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1002.000	62.44	-14.39	48.05	74.00	-25.95	peak
2	1666.000	61.57	-10.86	50.71	74.00	-23.29	peak
3	1722.000	60.13	-10.61	49.52	74.00	-24.48	peak
4	2342.000	54.02	-7.83	46.19	74.00	-27.81	peak
5	2440.000	51.77	-7.44	44.33	/	/	fundamental
6	2644.000	51.40	-7.49	43.91	74.00	-30.09	peak




Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5V

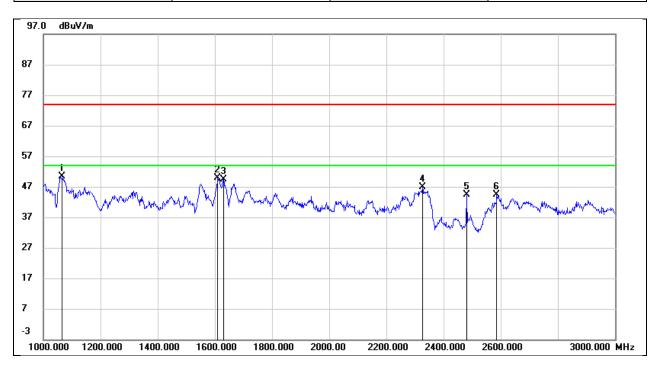

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1066.000	64.21	-13.83	50.38	74.00	-23.62	peak
2	1610.000	60.99	-11.13	49.86	74.00	-24.14	peak
3	1630.000	60.38	-11.03	49.35	74.00	-24.65	peak
4	2326.000	54.76	-7.94	46.82	74.00	-27.18	peak
5	2480.000	51.90	-7.47	44.43	/	/	fundamental
6	2586.000	51.93	-7.66	44.27	74.00	-29.73	peak



Test Mode: BLE 1M Frequency(MHz): 2480
Polarity: Vertical Test Voltage: DC 5V

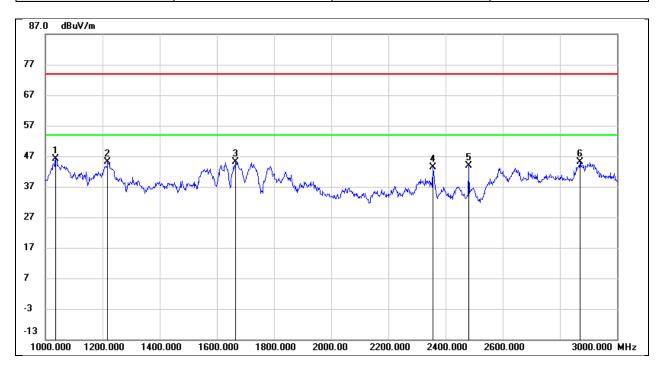


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1036.000	60.18	-14.09	46.09	74.00	-27.91	peak
2	1218.000	57.71	-12.62	45.09	74.00	-28.91	peak
3	1666.000	56.05	-10.86	45.19	74.00	-28.81	peak
4	2356.000	51.20	-7.72	43.48	74.00	-30.52	peak
5	2480.000	51.24	-7.47	43.77	/	/	fundamental
6	2870.000	51.62	-6.48	45.14	74.00	-28.86	peak



Page 44 of 87

8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5V

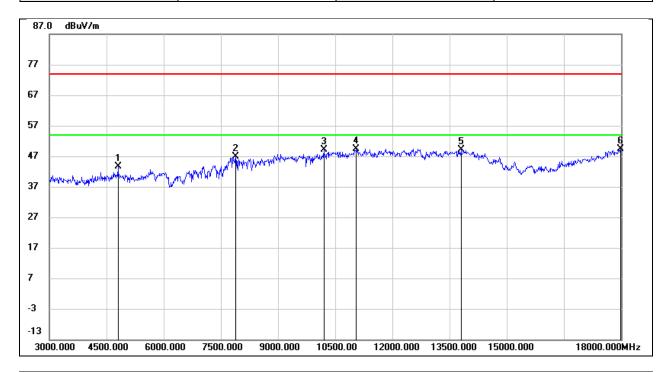


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4800.000	43.23	0.46	43.69	74.00	-30.31	peak
2	7890.000	39.58	7.29	46.87	74.00	-27.13	peak
3	10200.000	36.64	12.48	49.12	74.00	-24.88	peak
4	11055.000	34.41	15.04	49.45	74.00	-24.55	peak
5	13800.000	26.43	22.64	49.07	74.00	-24.93	peak
6	17985.000	22.64	26.77	49.41	74.00	-24.59	peak



REPORT NO.: 4791228123-1-RF-1 Page 45 of 87

Test Mode: BLE 1M Frequency(MHz): 2402
Polarity: Vertical Test Voltage: DC 5V

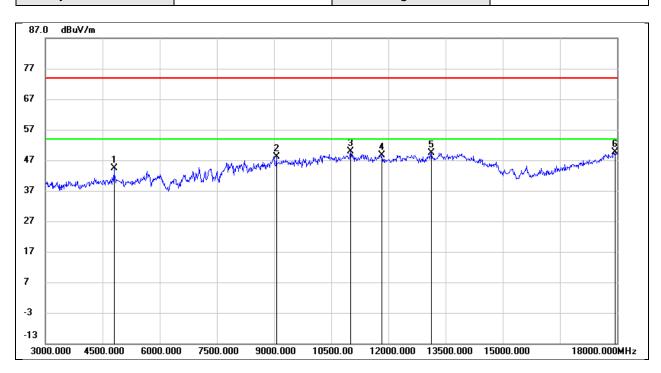


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4800.000	43.93	0.46	44.39	74.00	-29.61	peak
2	9060.000	37.41	10.82	48.23	74.00	-25.77	peak
3	11010.000	34.93	14.94	49.87	74.00	-24.13	peak
4	11835.000	30.81	17.79	48.60	74.00	-25.40	peak
5	13125.000	29.66	19.72	49.38	74.00	-24.62	peak
6	17940.000	22.90	26.61	49.51	74.00	-24.49	peak



REPORT NO.: 4791228123-1-RF-1 Page 46 of 87

Test Mode: BLE 1M Frequency(MHz): 2440
Polarity: Horizontal Test Voltage: DC 5V

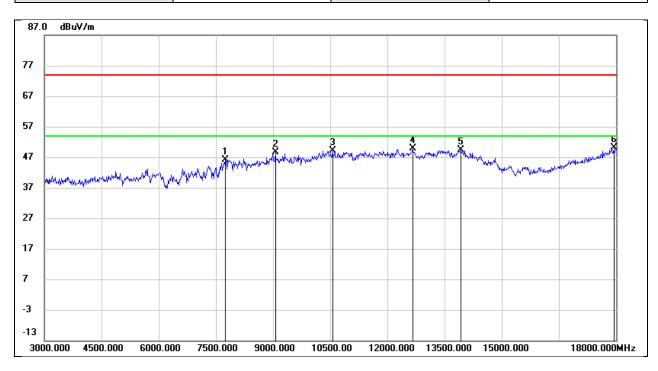


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	7755.000	38.78	7.38	46.16	74.00	-27.84	peak
2	9060.000	37.80	10.82	48.62	74.00	-25.38	peak
3	10560.000	35.41	13.84	49.25	74.00	-24.75	peak
4	12660.000	31.41	18.49	49.90	74.00	-24.10	peak
5	13920.000	26.78	22.71	49.49	74.00	-24.51	peak
6	17940.000	23.45	26.61	50.06	74.00	-23.94	peak



REPORT NO.: 4791228123-1-RF-1 Page 47 of 87

Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 5V

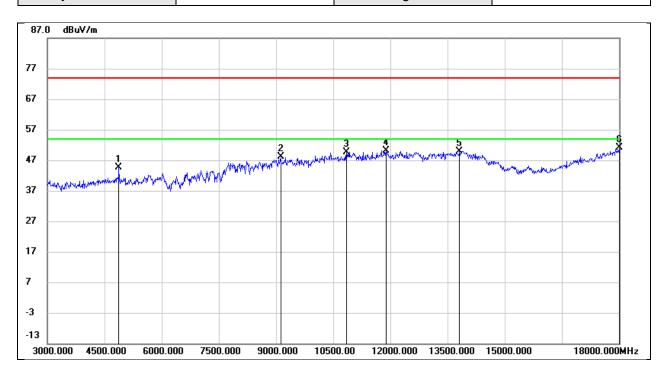


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4875.000	44.07	0.61	44.68	74.00	-29.32	peak
2	9120.000	37.55	10.47	48.02	74.00	-25.98	peak
3	10845.000	35.49	14.17	49.66	74.00	-24.34	peak
4	11880.000	32.20	17.97	50.17	74.00	-23.83	peak
5	13815.000	27.35	22.65	50.00	74.00	-24.00	peak
6	18000.000	24.31	26.83	51.14	74.00	-22.86	peak



REPORT NO.: 4791228123-1-RF-1 Page 48 of 87

Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5V

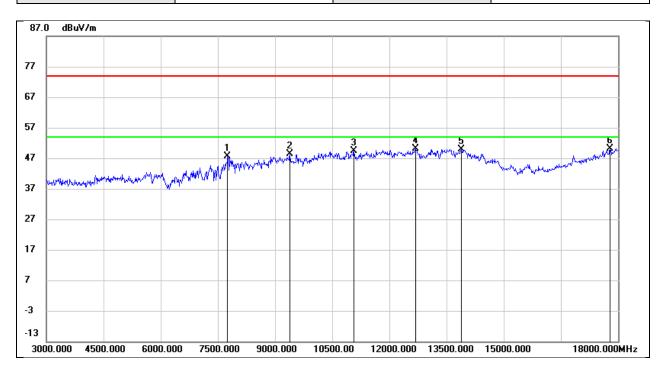


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	7755.000	40.24	7.38	47.62	74.00	-26.38	peak
2	9390.000	37.95	10.43	48.38	74.00	-25.62	peak
3	11070.000	34.20	15.08	49.28	74.00	-24.72	peak
4	12690.000	31.45	18.60	50.05	74.00	-23.95	peak
5	13890.000	27.23	22.69	49.92	74.00	-24.08	peak
6	17790.000	24.14	25.99	50.13	74.00	-23.87	peak



REPORT NO.: 4791228123-1-RF-1 Page 49 of 87

Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 5V

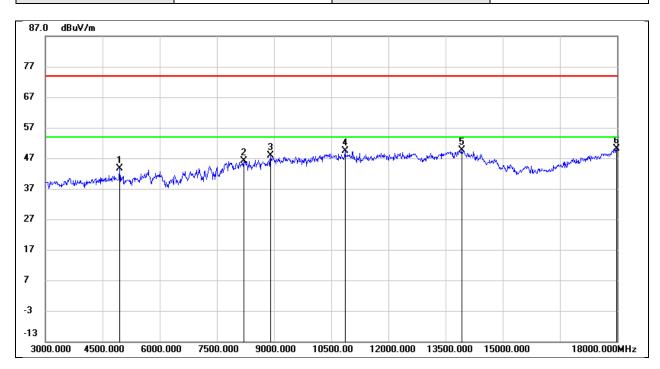


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4950.000	42.94	0.74	43.68	74.00	-30.32	peak
2	8205.000	37.35	8.85	46.20	74.00	-27.80	peak
3	8910.000	38.04	9.93	47.97	74.00	-26.03	peak
4	10860.000	35.14	14.23	49.37	74.00	-24.63	peak
5	13935.000	27.00	22.72	49.72	74.00	-24.28	peak
6	17985.000	23.46	26.77	50.23	74.00	-23.77	peak



REPORT NO.: 4791228123-1-RF-1 Page 50 of 87

Test Mode:	BLE 2M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5V

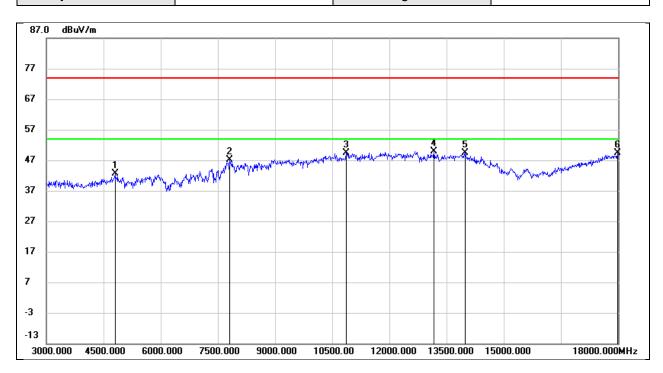


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4800.000	42.27	0.46	42.73	74.00	-31.27	peak
2	7815.000	39.53	7.50	47.03	74.00	-26.97	peak
3	10875.000	35.15	14.31	49.46	74.00	-24.54	peak
4	13170.000	30.00	19.95	49.95	74.00	-24.05	peak
5	13980.000	26.69	22.75	49.44	74.00	-24.56	peak
6	17985.000	22.67	26.77	49.44	74.00	-24.56	peak



REPORT NO.: 4791228123-1-RF-1 Page 51 of 87

Test Mode:	BLE 2M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5V

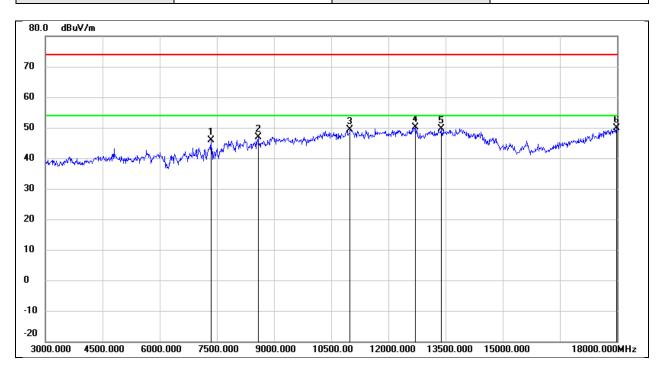


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	7350.000	38.73	7.17	45.90	74.00	-28.10	peak
2	8580.000	38.37	8.63	47.00	74.00	-27.00	peak
3	10995.000	34.45	14.89	49.34	74.00	-24.66	peak
4	12705.000	31.37	18.66	50.03	74.00	-23.97	peak
5	13380.000	28.35	21.33	49.68	74.00	-24.32	peak
6	17985.000	23.20	26.77	49.97	74.00	-24.03	peak



REPORT NO.: 4791228123-1-RF-1 Page 52 of 87

Test Mode:	BLE 2M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 5V

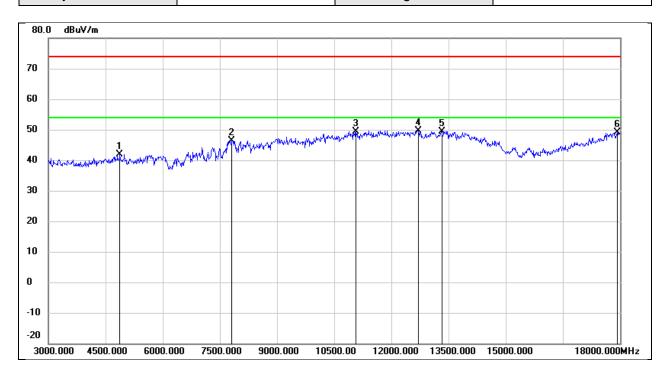


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4875.000	41.35	0.61	41.96	74.00	-32.04	peak
2	7815.000	38.91	7.50	46.41	74.00	-27.59	peak
3	11070.000	34.34	15.08	49.42	74.00	-24.58	peak
4	12705.000	31.05	18.66	49.71	74.00	-24.29	peak
5	13320.000	28.57	20.91	49.48	74.00	-24.52	peak
6	17925.000	22.58	26.55	49.13	74.00	-24.87	peak



REPORT NO.: 4791228123-1-RF-1 Page 53 of 87

Test Mode:	BLE 2M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 5V

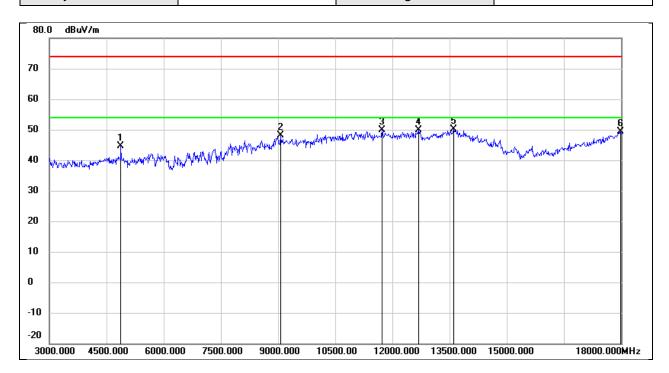


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4875.000	44.01	0.61	44.62	74.00	-29.38	peak
2	9060.000	37.37	10.82	48.19	74.00	-25.81	peak
3	11730.000	32.37	17.41	49.78	74.00	-24.22	peak
4	12690.000	31.21	18.60	49.81	74.00	-24.19	peak
5	13605.000	28.55	21.68	50.23	74.00	-23.77	peak
6	17985.000	22.55	26.77	49.32	74.00	-24.68	peak



REPORT NO.: 4791228123-1-RF-1 Page 54 of 87

Test Mode:	BLE 2M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5V

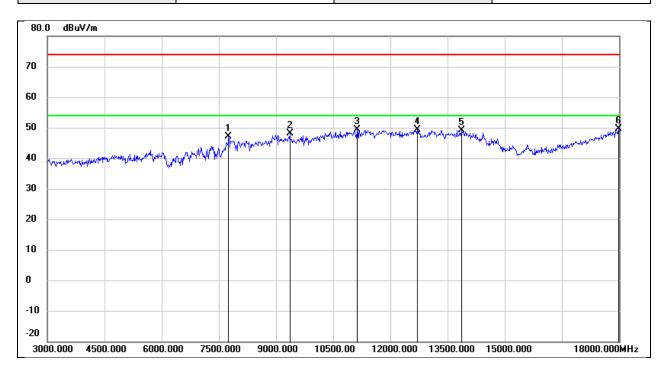


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	7755.000	39.70	7.38	47.08	74.00	-26.92	peak
2	9360.000	37.65	10.36	48.01	74.00	-25.99	peak
3	11130.000	34.20	15.22	49.42	74.00	-24.58	peak
4	12705.000	30.69	18.66	49.35	74.00	-24.65	peak
5	13860.000	26.56	22.68	49.24	74.00	-24.76	peak
6	17985.000	22.74	26.77	49.51	74.00	-24.49	peak



REPORT NO.: 4791228123-1-RF-1 Page 55 of 87

Test Mode:	BLE 2M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 5V

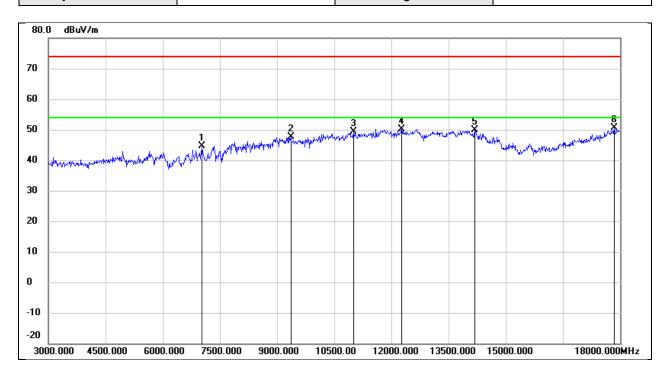


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	7035.000	37.39	7.28	44.67	74.00	-29.33	peak
2	9360.000	37.18	10.36	47.54	74.00	-26.46	peak
3	11010.000	34.37	14.94	49.31	74.00	-24.69	peak
4	12270.000	31.56	18.55	50.11	74.00	-23.89	peak
5	14190.000	27.62	22.19	49.81	74.00	-24.19	peak
6	17850.000	24.39	26.28	50.67	74.00	-23.33	peak

Page 56 of 87

8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5V

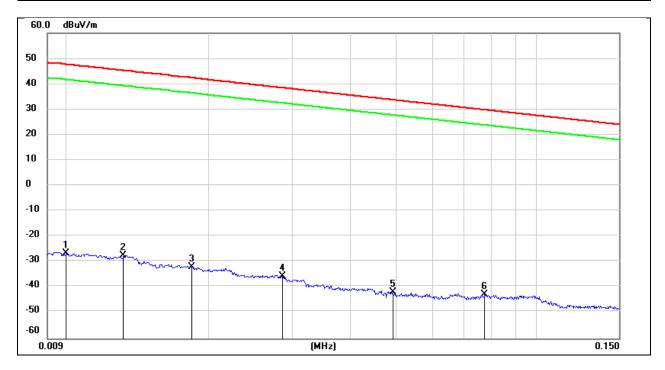


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.01	74.72	-101.4	-26.68	47.6	-78.18	-3.9	-74.28	peak
2	0.0131	73.97	-101.38	-27.41	45.25	-78.91	-6.25	-72.66	peak
3	0.0183	69.31	-101.36	-32.05	42.35	-83.55	-9.15	-74.4	peak
4	0.0286	65.94	-101.38	-35.44	38.47	-86.94	-13.03	-73.91	peak
5	0.0492	59.55	-101.47	-41.92	33.76	-93.42	-17.74	-75.68	peak
6	0.0772	58.8	-101.61	-42.81	29.85	-94.31	-21.65	-72.66	peak



2402 BLE 1M Frequency(MHz): Test Mode: DC 5V Polarity: Test Voltage: Horizontal

Page 57 of 87

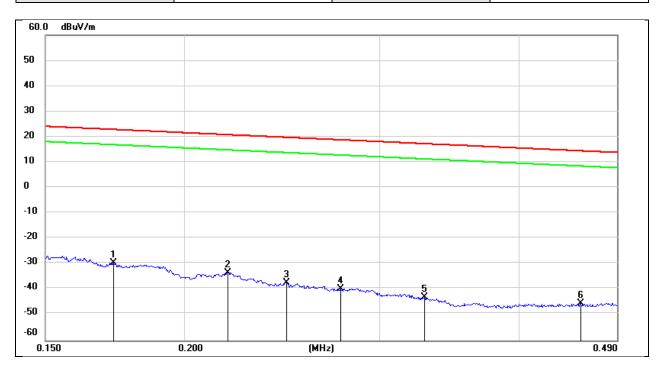


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1728	72	-101.67	-29.67	22.86	-81.17	-28.64	-52.53	peak
2	0.219	68.27	-101.75	-33.48	20.79	-84.98	-30.71	-54.27	peak
3	0.2472	64.45	-101.8	-37.35	19.74	-88.85	-31.76	-57.09	peak
4	0.2765	62.22	-101.83	-39.61	18.77	-91.11	-32.73	-58.38	peak
5	0.3286	58.71	-101.88	-43.17	17.27	-94.67	-34.23	-60.44	peak
6	0.4546	56.53	-102.02	-45.49	14.45	-96.99	-37.05	-59.94	peak



REPORT NO.: 4791228123-1-RF-1 Page 58 of 87

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5V

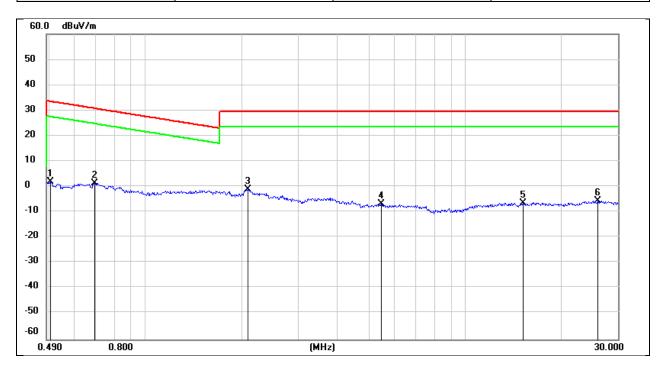


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.5039	63.93	-62.07	1.86	33.56	-49.64	-17.94	-31.7	peak
2	0.6965	63.55	-62.11	1.44	30.74	-50.06	-20.76	-29.3	peak
3	2.0939	60.89	-61.79	-0.9	29.54	-52.4	-21.96	-30.44	peak
4	5.477	54.79	-61.42	-6.63	29.54	-58.13	-21.96	-36.17	peak
5	15.1859	54.55	-61.01	-6.46	29.54	-57.96	-21.96	-36	peak
6	25.8978	54.76	-60.36	-5.6	29.54	-57.1	-21.96	-35.14	peak

Page 59 of 87

8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5V

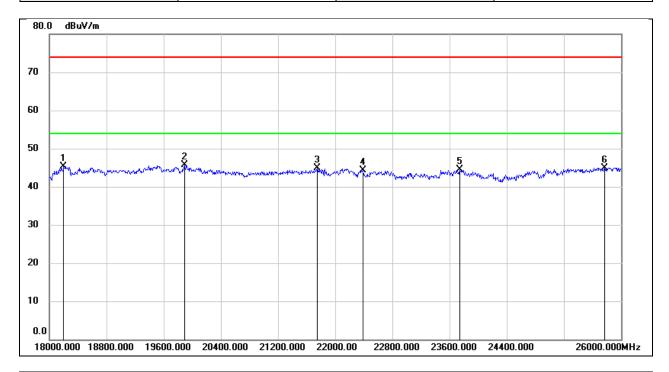


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	18200.000	50.79	-5.52	45.27	74.00	-28.73	peak
2	19888.000	51.07	-5.36	45.71	74.00	-28.29	peak
3	21752.000	49.30	-4.32	44.98	74.00	-29.02	peak
4	22392.000	48.33	-4.02	44.31	74.00	-29.69	peak
5	23744.000	47.65	-3.20	44.45	74.00	-29.55	peak
6	25768.000	45.64	-0.64	45.00	74.00	-29.00	peak



REPORT NO.: 4791228123-1-RF-1 Page 60 of 87

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5V

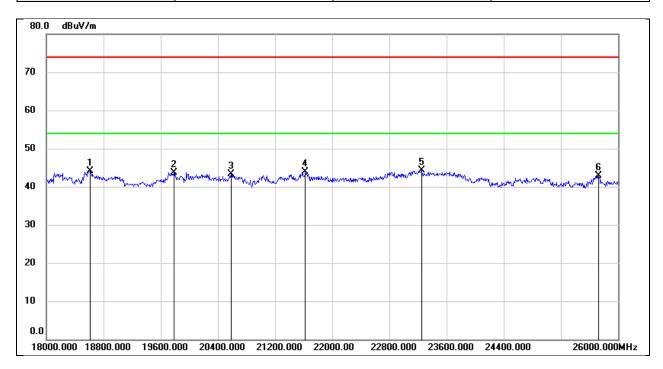


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	18616.000	49.39	-5.34	44.05	74.00	-29.95	peak
2	19784.000	49.07	-5.28	43.79	74.00	-30.21	peak
3	20584.000	48.50	-5.27	43.23	74.00	-30.77	peak
4	21624.000	48.51	-4.51	44.00	74.00	-30.00	peak
5	23248.000	47.65	-3.37	44.28	74.00	-29.72	peak
6	25728.000	43.61	-0.72	42.89	74.00	-31.11	peak

REPORT NO.: 4791228123-1-RF-1 Page 61 of 87

8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5V

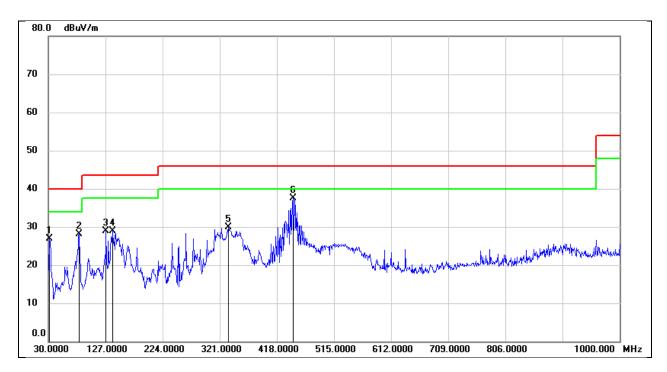

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	31.9400	40.58	-13.62	26.96	40.00	-13.04	QP
2	82.3800	44.65	-16.55	28.10	40.00	-11.90	QP
3	127.9700	43.56	-14.66	28.90	43.50	-14.60	QP
4	139.6100	42.91	-14.08	28.83	43.50	-14.67	QP
5	335.5500	40.17	-10.21	29.96	46.00	-16.04	QP
6	446.1300	46.27	-8.72	37.55	46.00	-8.45	QP



Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5V

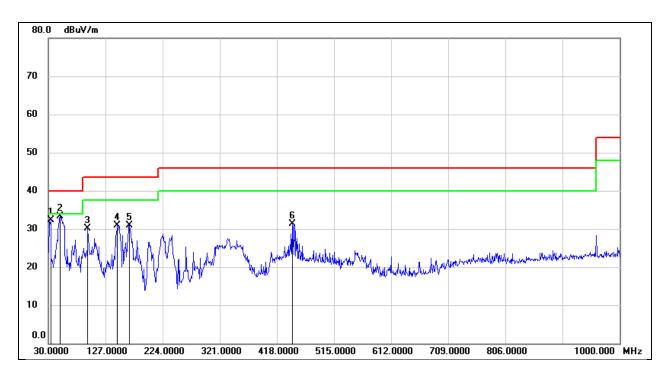

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	33.8800	46.36	-13.99	32.37	40.00	-7.63	QP
2	50.3700	48.83	-15.58	33.25	40.00	-6.75	QP
3	96.9300	46.91	-16.76	30.15	43.50	-13.35	QP
4	147.3700	44.69	-13.72	30.97	43.50	-12.53	QP
5	167.7400	43.27	-12.37	30.90	43.50	-12.60	QP
6	444.1900	40.08	-8.75	31.33	46.00	-14.67	QP



Page 63 of 87

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass



Page 64 of 87

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

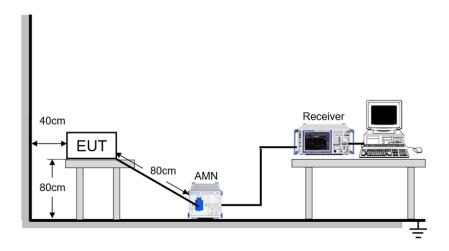

TEST ENVIRONMENT

Temperature	24.3°C	Relative Humidity	57.0%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz


TEST DATE / ENGINEER

Test Date	April 24, 2024	Test By	Wite Chen
-----------	----------------	---------	-----------

Page 65 of 87

TEST RESULTS

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Line		

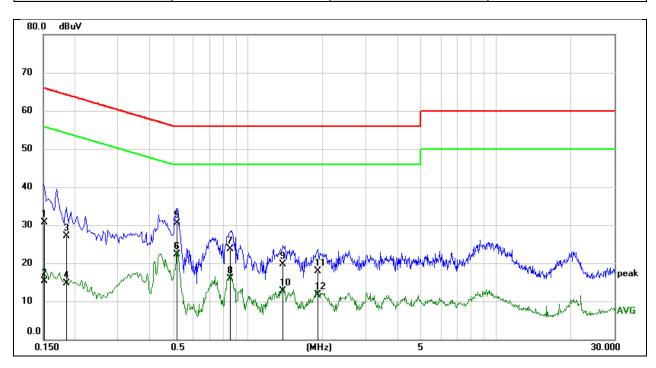

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1517	20.40	10.24	30.64	65.91	-35.27	QP
2	0.1517	5.07	10.24	15.31	55.91	-40.60	AVG
3	0.1852	16.93	10.17	27.10	64.25	-37.15	QP
4	0.1852	4.49	10.17	14.66	54.25	-39.59	AVG
5	0.5196	20.52	10.04	30.56	56.00	-25.44	QP
6	0.5196	12.29	10.04	22.33	46.00	-23.67	AVG
7	0.8533	13.85	9.93	23.78	56.00	-32.22	QP
8	0.8533	5.89	9.93	15.82	46.00	-30.18	AVG
9	1.3829	9.71	9.91	19.62	56.00	-36.38	QP
10	1.3829	2.85	9.91	12.76	46.00	-33.24	AVG
11	1.9035	7.80	10.02	17.82	56.00	-38.18	QP
12	1.9035	1.77	10.02	11.79	46.00	-34.21	AVG

Note:


- 1. Result = Reading + Correct Factor.
- 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
- 4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



REPORT NO.: 4791228123-1-RF-1 Page 66 of 87

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Neutral		

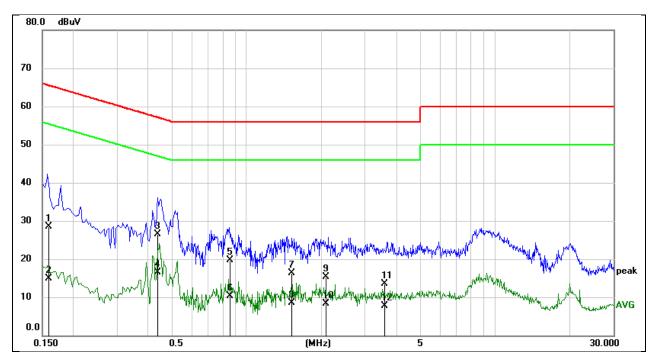

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1592	18.22	10.22	28.44	65.51	-37.07	QP
2	0.1592	4.70	10.22	14.92	55.51	-40.59	AVG
3	0.4369	16.50	10.06	26.56	57.12	-30.56	QP
4	0.4369	6.44	10.06	16.50	47.12	-30.62	AVG
5	0.8616	9.82	9.92	19.74	56.00	-36.26	QP
6	0.8616	0.35	9.92	10.27	46.00	-35.73	AVG
7	1.5284	6.29	9.95	16.24	56.00	-39.76	QP
8	1.5284	-1.48	9.95	8.47	46.00	-37.53	AVG
9	2.0932	5.23	10.05	15.28	56.00	-40.72	QP
10	2.0932	-1.67	10.05	8.38	46.00	-37.62	AVG
11	3.6058	3.28	10.27	13.55	56.00	-42.45	QP
12	3.6058	-2.65	10.27	7.62	46.00	-38.38	AVG

Note:

- 1. Result = Reading + Correct Factor.
- 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
- 4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



Page 67 of 87

11. TEST DATA

11.1. APPENDIX A MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	7.97	30	Pass
NVNT	BLE 1M	2440	Ant1	7.99	30	Pass
NVNT	BLE 1M	2480	Ant1	7.88	30	Pass
NVNT	BLE 2M	2402	Ant1	7.96	30	Pass
NVNT	BLE 2M	2440	Ant1	7.98	30	Pass
NVNT	BLE 2M	2480	Ant1	7.90	30	Pass




Page 68 of 87

11.2. APPENDIX B -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.67	≥0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.66	≥0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.71	≥0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.3	≥0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.3	≥0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.15	≥0.5	Pass



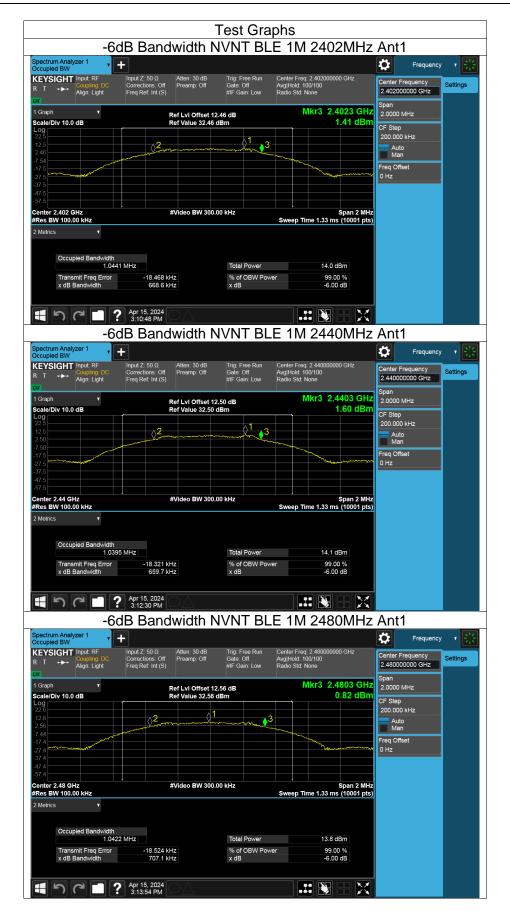







Page 71 of 87

11.3. APPENDIX C OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.037
NVNT	BLE 1M	2440	Ant1	1.038
NVNT	BLE 1M	2480	Ant1	1.038
NVNT	BLE 2M	2402	Ant1	2.071
NVNT	BLE 2M	2440	Ant1	2.065
NVNT	BLE 2M	2480	Ant1	2.065












Page 74 of 87


11.4. APPENDIX D MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-7.91	≥8	Pass
NVNT	BLE 1M	2440	Ant1	-7.95	≥8	Pass
NVNT	BLE 1M	2480	Ant1	-8.06	≥8	Pass
NVNT	BLE 2M	2402	Ant1	-11.04	≥8	Pass
NVNT	BLE 2M	2440	Ant1	-11.07	≥8	Pass
NVNT	BLE 2M	2480	Ant1	-11.08	≥8	Pass



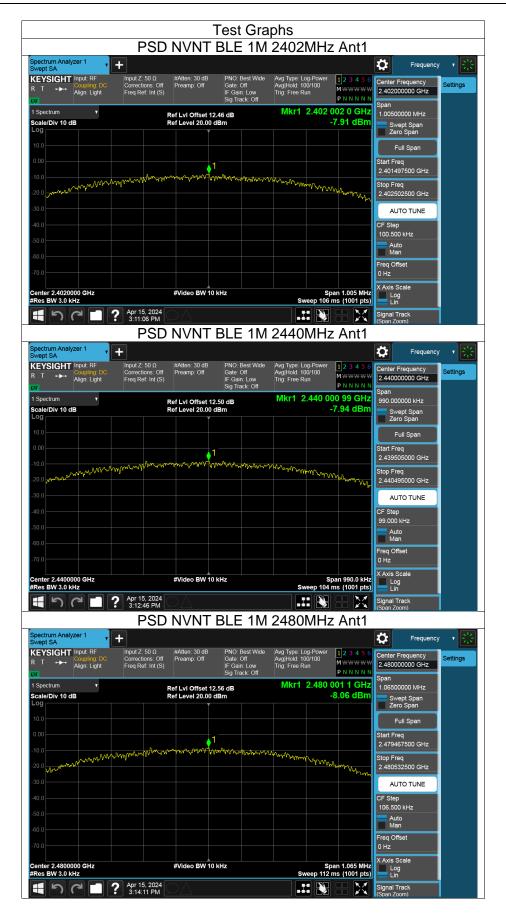



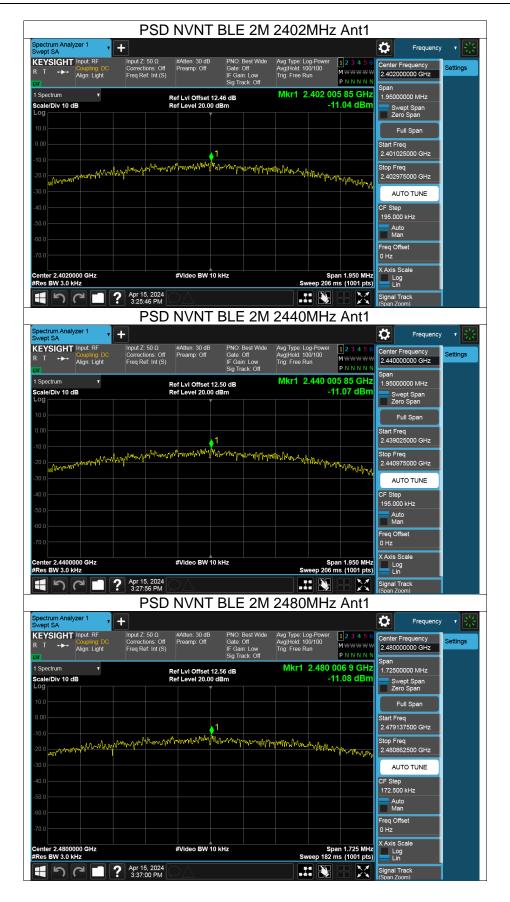




Page 77 of 87

11.5. APPENDIX E BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-52.62	-20	Pass
NVNT	BLE 1M	2480	Ant1	-53.38	-20	Pass
NVNT	BLE 2M	2402	Ant1	-33.17	-20	Pass
NVNT	BLE 2M	2480	Ant1	-48.2	-20	Pass




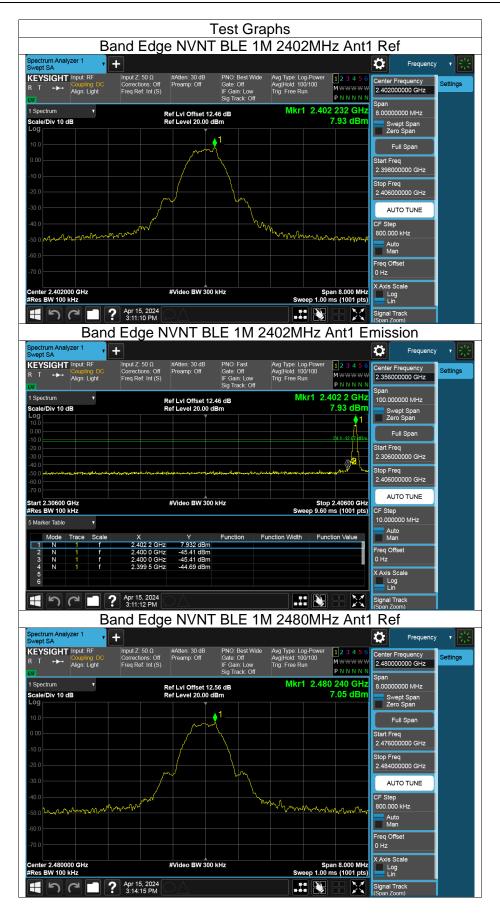







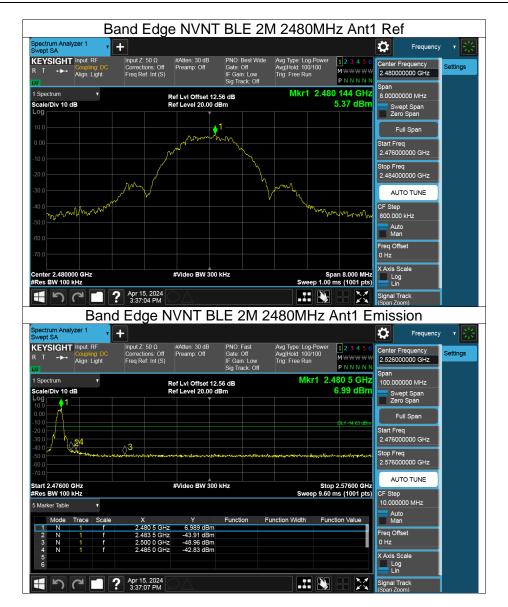




Page 81 of 87

11.6. APPENDIX F CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-55.85	-20	Pass
NVNT	BLE 1M	2440	Ant1	-57.45	-20	Pass
NVNT	BLE 1M	2480	Ant1	-56.56	-20	Pass
NVNT	BLE 2M	2402	Ant1	-53.34	-20	Pass
NVNT	BLE 2M	2440	Ant1	-56.37	-20	Pass
NVNT	BLE 2M	2480	Ant1	-55.29	-20	Pass




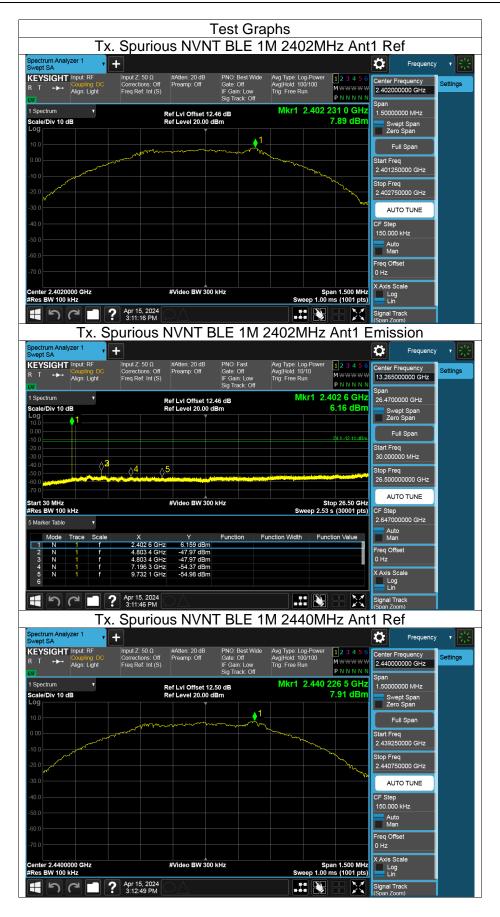







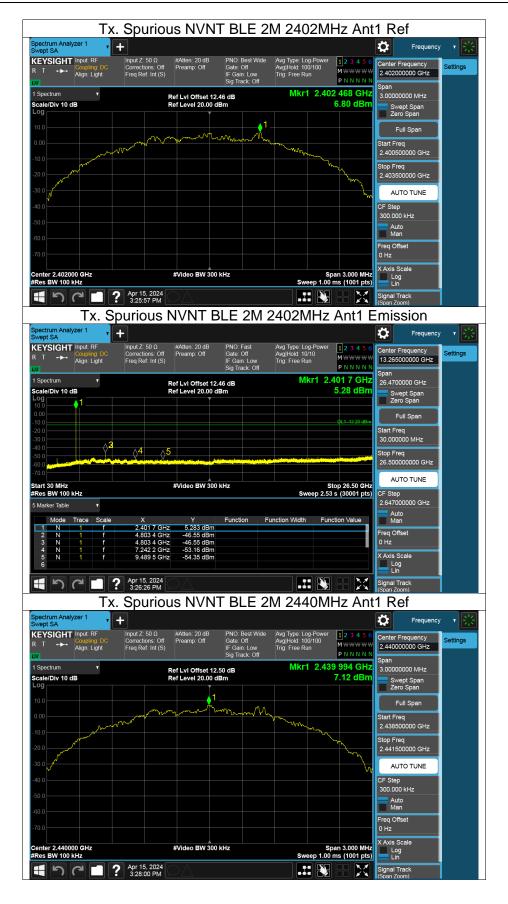







Page 86 of 87

11.7. APPENDIX G DUTY CYCLE

Mode	N1 (msec)	N2 (msec)	N3 (msec)	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
BLE 1M	1.371	1.734	3.871	2.137	2.500	0.8548	85.48	0.68	0.47	0.5
BLE 2M	0.924	1.719	2.799	1.080	1.875	0.5760	57.60	2.40	0.93	1

Note:

On Time=N3-N2 Period=N3-N1

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.





END OF REPORT