



## SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240700132803

Page: 1 of 163

# TEST REPORT

<b>Application No.:</b>	SHCR2407001328AT
<b>FCC ID:</b>	2BHTA-B282E
<b>Applicant:</b>	SYNLAN TECHNOLOGY PTE. LTD.
<b>Address of Applicant:</b>	7 TEMASEK BOULEVARD #29-01D SUNTEC TOWER ONE SINGAPORE (038987)
<b>Manufacturer:</b>	SYNLAN TECHNOLOGY PTE. LTD.
<b>Address of Manufacturer:</b>	7 TEMASEK BOULEVARD #29-01D SUNTEC TOWER ONE SINGAPORE (038987)
<b>Factory:</b>	Jixian Branch of Xi'an BYD Electronics Co., Ltd.
<b>Address of Factory:</b>	No. 5, Jixian Avenue, Jixian Industrial Park, High-tech Zone, Xi'an
<b>Equipment Under Test (EUT):</b>	
<b>EUT Name:</b>	iFLYTEK AINOTE Air 2
<b>Model No.:</b>	XF-DX-B282E
<b>Trade Mark:</b>	iFLYTEK
<b>Standard(s) :</b>	47 CFR Part 15, Subpart C 15.247
<b>Date of Receipt:</b>	2024-07-08
<b>Date of Test:</b>	2024-07-10 to 2024-08-24
<b>Date of Issue:</b>	2024-08-27

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------



\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record			
Version	Description	Date	Remark
00	Original	2024-08-27	/

Authorized for issue by:			
Tested By		 Bill Wu	
		Bill Wu/Project Engineer	
Approved By		 Parlam Zhan	
		Parlam Zhan / Reviewer	

## 2 Test Summary

<b>Radio Spectrum Technical Requirement</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

<b>Radio Spectrum Matter Part</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Average Output Power		ANSI C63.10 (2013) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.3	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

### 3 Contents

	Page
<b>1 COVER PAGE</b>	<b>1</b>
<b>2 Test Summary</b>	<b>3</b>
<b>3 Contents</b>	<b>4</b>
<b>4 General Information</b>	<b>6</b>
4.1 Details of E.U.T .....	6
4.2 Description of Support Units .....	6
4.3 Power level setting using in test.....	6
4.4 Measurement Uncertainty .....	7
4.5 Test Location.....	8
4.6 Test Facility .....	8
4.7 Deviation from Standards.....	8
4.8 Abnormalities from Standard Conditions .....	8
<b>5 Equipment List</b>	<b>9</b>
<b>6 Radio Spectrum Technical Requirement</b>	<b>11</b>
6.1 Antenna Requirement .....	11
6.1.1 Test Requirement: .....	11
6.1.2 Conclusion .....	11
<b>7 Radio Spectrum Matter Test Results</b>	<b>12</b>
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	12
7.1.1 E.U.T. Operation.....	12
7.1.2 Test Mode Description.....	12
7.1.3 Test Setup Diagram.....	12
7.1.4 Measurement Procedure and Data.....	13
7.2 Radiated Emissions which fall in the restricted bands .....	16
7.2.1 E.U.T. Operation.....	16
7.2.2 Test Mode Description.....	16
7.2.3 Test Setup Diagram .....	17
7.2.4 Measurement Procedure and Data.....	17
7.3 Radiated Spurious Emissions Below 1GHz.....	42
7.3.1 E.U.T. Operation.....	42
7.3.2 Test Mode Description .....	42
7.3.3 Test Setup Diagram .....	42
7.3.4 Measurement Procedure and Data.....	43
7.4 Radiated Spurious Emissions Above 1GHz.....	46
7.4.1 E.U.T. Operation.....	46
7.4.2 Test Mode Description .....	46
7.4.3 Test Setup Diagram .....	46
7.4.4 Measurement Procedure and Data.....	47
7.5 Conducted Average Output Power .....	84
7.5.1 E.U.T. Operation.....	84
7.5.2 Test Mode Description .....	84
7.5.3 Test Setup Diagram .....	84
7.5.4 Measurement Procedure and Data.....	84
7.6 Minimum 6dB Bandwidth .....	85
7.6.1 E.U.T. Operation.....	85
7.6.2 Test Mode Description .....	85

7.6.3	<i>Test Setup Diagram</i> .....	85
7.6.4	<i>Measurement Procedure and Data</i> .....	85
7.7	Power Spectrum Density.....	86
7.7.1	<i>E.U.T. Operation</i> .....	86
7.7.2	<i>Test Mode Description</i> .....	86
7.7.3	<i>Test Setup Diagram</i> .....	86
7.7.4	<i>Measurement Procedure and Data</i> .....	86
7.8	Conducted Band Edges Measurement.....	87
7.8.1	<i>E.U.T. Operation</i> .....	87
7.8.2	<i>Test Mode Description</i> .....	87
7.8.3	<i>Test Setup Diagram</i> .....	87
7.8.4	<i>Measurement Procedure and Data</i> .....	87
7.9	Conducted Spurious Emissions .....	88
7.9.1	<i>E.U.T. Operation</i> .....	88
7.9.2	<i>Test Mode Description</i> .....	88
7.9.3	<i>Test Setup Diagram</i> .....	88
7.9.4	<i>Measurement Procedure and Data</i> .....	88
8	<b>Test Setup Photo</b> .....	89
9	<b>EUT Constructional Details (EUT Photos)</b> .....	89
10	<b>Appendix</b> .....	89
10.1	Appendix A: DTS Bandwidth.....	89
10.1.1	<i>Test Result</i> .....	89
10.1.2	<i>Test Graphs</i> .....	90
10.2	Appendix B: Occupied Channel Bandwidth .....	98
10.2.1	<i>Test Result</i> .....	98
10.2.2	<i>Test Graphs</i> .....	99
10.3	Appendix C: Maximum conducted output power .....	107
10.3.1	<i>Test Result</i> .....	107
10.3.2	<i>Test Graphs</i> .....	108
10.4	Appendix D: Maximum power spectral density .....	116
10.4.1	<i>Test Result</i> .....	116
10.4.2	<i>Test Graphs</i> .....	117
10.5	Appendix E: Band edge measurements .....	125
10.5.1	<i>Test Result</i> .....	125
10.5.2	<i>Test Graphs</i> .....	126
10.6	Appendix F: Conducted Spurious Emission.....	131
10.6.1	<i>Test Result</i> .....	131
10.6.2	<i>Test Graphs</i> .....	133
10.7	Appendix G: Duty Cycle .....	155
10.7.1	<i>Test Result</i> .....	155
10.7.2	<i>Test Graphs</i> .....	156

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC 3.8V 2600mAh Rechargeable battery
Test Voltage:	AC 120V 60Hz
Operation Frequency:	802.11b/g/n(HT20)/ax(HEW20): 2412MHz to 2462MHz, 802.11n(HT40)/ax(HEW40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK), 802.11g/n/ax: OFDM (64QAM, 16QAM, QPSK, BPSK)
Number of Channels:	802.11b/g/n(HT20)/ax(HEW20): 11, 802.11n(HT40)/ax(HEW40): 7
Channel Spacing:	5MHz
Antenna Type:	PIFA Antenna
Antenna Gain:	-0.33 dBi (Provided by manufacturer)
Date Rate:	802.11b:1/2/5.5/11Mbps 802.11g:6/9/12/18/24/36/48/54Mbps 802.11n:MCS0-MCS7 802.11ax:MCS0-MCS11

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	LENOVO	L460	-

### 4.3 Power level setting using in test

Channel	802.11b	802.11g	802.11n(HT20)	802.11ax(HEW20)
1	0x3B	0x3B	0x3B	0x3B
6	0x3B	0x3B	0x3B	0x3B
11	0x3B	0x3B	0x3B	0x3B
Channel	802.11n(HT40)	802.11ax(HEW40)		
3	0x3B	0x3B		
6	0x3B	0x3B		
9	0x3B	0x3B		

**4.4 Measurement Uncertainty**

No.	Item	Measurement Uncertainty
1	Radio Frequency	$8.4 \times 10^{-8}$
2	Timeout	2s
3	Duty cycle	0.4%
4	Occupied Bandwidth	3%
5	RF conducted power	0.6dB
6	RF power density	2.9dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-6GHz)
		5.4dB (6GHz-18GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666      Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc ) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).
3. Sample source: sent by customer.

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 8617A

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

#### 4.7 Deviation from Standards

None

#### 4.8 Abnormalities from Standard Conditions

None

## 5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
<b>RF Conducted Test</b>					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2023-12-19	2024-12-18
Spectrum Analyzer	Keysight	N9020B	SHEM241-1	2023-12-19	2024-12-18
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2023-08-01	2024-07-31
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2024-07-31	2025-07-30
Signal Generator	R&S	SMR20	SHEM006-1	2023-08-01	2024-07-31
Signal Generator	R&S	SMR20	SHEM006-1	2024-07-31	2025-07-30
Signal Generator	Agilent	N5182A	SHEM182-1	2023-08-01	2024-07-31
Signal Generator	Agilent	N5182A	SHEM182-1	2024-07-31	2025-07-30
Communication Tester	R&S	CMW270	SHEM183-1	2024-05-23	2025-05-22
Communication Tester	R&S	CMW500	SHEM268-1	2024-05-23	2025-05-22
Power Sensor	Keysight	U2021XA * 4	SHEM184-1	2023-08-01	2024-07-31
Power Sensor	Keysight	U2021XA * 4	SHEM293-1	2024-07-31	2025-07-30
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2022-11-08	2024-11-07
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2023-12-19	2024-12-18
DC Power Supply	HP	6010A	SHEM222-1	2023-12-19	2024-12-18
Conducted test Cable	/	RF01~RF04	/	2023-12-19	2024-12-18
Switcher	Tonscend	JS0806	SHEM184-1	2023-08-01	2024-07-31
Switcher	Tonscend	JS0806	SHEM293-1	2024-07-31	2025-07-30
Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	/	/
Switcher+Power Sensor	TST	TSPS2023R	SHEM263-1	2023-08-01	2024-07-31
Switcher+Power Sensor	TST	TSPS2023R	SHEM263-1	2024-07-31	2025-07-30
Test software	TST	TST PASS	Version: 2.0	/	/
<b>RF Radiated Test</b>					
EMI test Receiver	R&S	ESU40	SHEM051-1	2023-12-19	2024-12-18
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2023-12-19	2024-12-18
Communication Tester	R&S	CMW500	SHEM268-1	2024-05-23	2025-05-22
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2023-12-19	2024-12-18
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2023-09-03	2025-09-02
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2023-04-17	2025-04-16
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2024-08-05	2026-08-04
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2023-09-03	2025-09-02
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2023-09-03	2025-09-02
Pre-Amplifier	HP	8447D	SHEM236-1	2023-12-19	2024-12-18
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2023-12-19	2024-12-18
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023-05-06	2026-05-05
RE test Cable	/	PT18-NMNM-10M	SHEM217-2	2023-12-19	2024-12-18
Test software	ESE	E3	Version: 6.111221a	/	/

**SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.**

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240700132803

Page: 10 of 163

<b>Conducted Emissions at Mains Power Port (150kHz-30MHz)</b>						
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>	
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2023/12/19	2024/12/18	
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2023/12/19	2024/12/18	
Line impedance stabilization network	EMCO	3816_2	SHEM019-1	2023/12/19	2024/12/18	
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2023/12/19	2024/12/18	
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2023/12/19	2024/12/18	
CE test Cable	/	/	SHEM172-1	2023/12/19	2024/12/18	
Test Software	ESE	e3	Version: 6.191211	N/A	N/A	

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PIFA antenna and no consideration of replacement. The best case gain of the antenna is -0.33 dBi.

Antenna location: Refer to internal photo.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

#### 7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	Charge + TX mode _Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)/ax(HEW20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40)/ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

#### 7.1.3 Test Setup Diagram

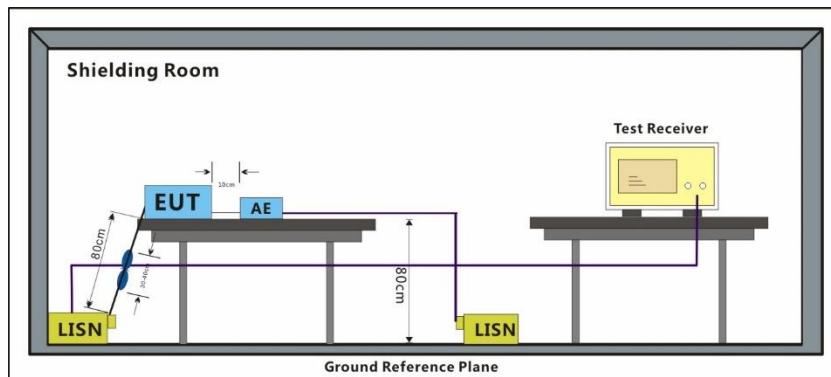


**7.1.4 Measurement Procedure and Data**

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 $\mu$ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 04; Line: Live line

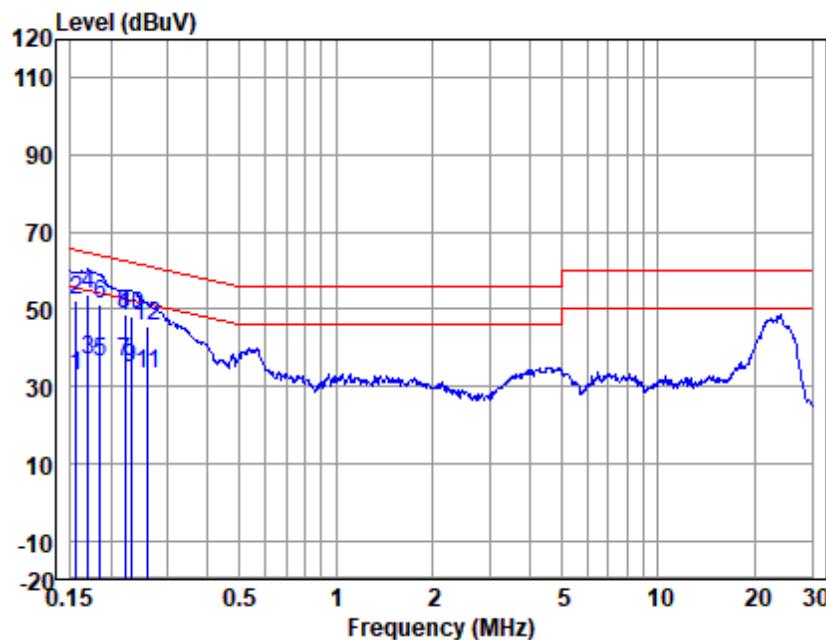


LISN : LINE  
EUT/Project No : 1328AT  
Test Mode : 04

Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Emission Limit (dBuV)	Over Limit (dB)	Remark
1 0.16	22.50	0.50	9.90	32.90	55.65	-22.75	Average
2 0.16	42.06	0.50	9.90	52.46	65.65	-13.19	QP
3 0.17	26.47	0.50	9.90	36.87	54.94	-18.07	Average
4 0.17	43.38	0.50	9.90	53.78	64.94	-11.16	QP
5 0.19	26.00	0.50	9.90	36.40	54.24	-17.84	Average
6 0.19	41.05	0.50	9.90	51.45	64.24	-12.79	QP
7 0.22	25.94	0.47	9.90	36.31	52.74	-16.43	Average
8 0.22	38.51	0.47	9.90	48.88	62.74	-13.86	QP
9 0.23	24.65	0.45	9.90	35.00	52.39	-17.39	Average
10 0.23	37.77	0.45	9.90	48.12	62.39	-14.27	QP
11 0.26	22.81	0.41	9.90	33.12	51.42	-18.30	Average
12 0.26	35.23	0.41	9.90	45.54	61.42	-15.88	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 04; Line: Neutral Line

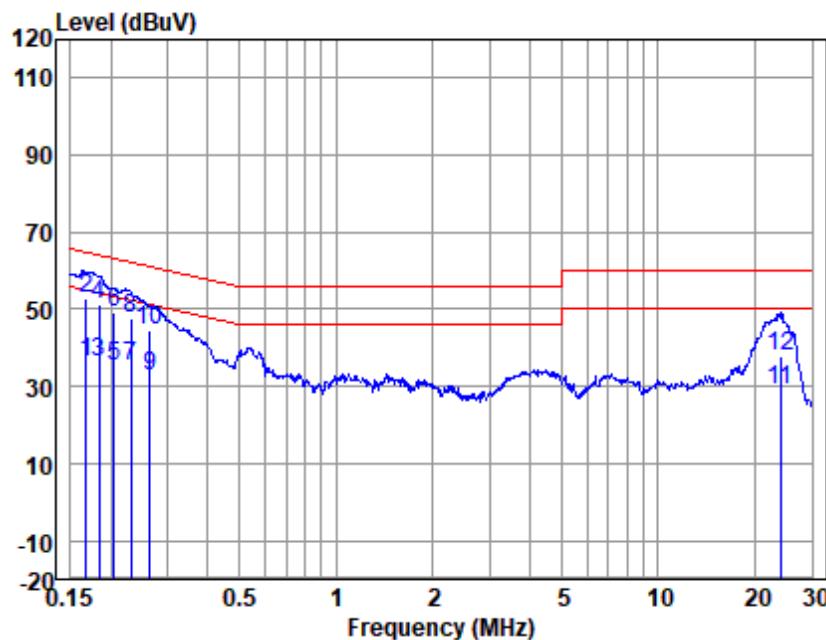

LISN : NEUTRAL  
EUT/Project No : 1328AT  
Test Mode : 04

Freq (MHz)	Read level (dBuV)	LISN Factor	Cable Loss (dB)	Emission Level (dBuV)	Emission Limit (dBuV)	Over Limit (dB)	Remark
1 0.17	26.20	0.32	9.90	36.42	55.08	-18.66	Average
2 0.17	42.45	0.32	9.90	52.67	65.08	-12.41	QP
3 0.18	26.27	0.31	9.90	36.48	54.33	-17.85	Average
4 0.18	41.17	0.31	9.90	51.38	64.33	-12.95	QP
5 0.20	25.12	0.30	9.90	35.32	53.45	-18.13	Average
6 0.20	38.88	0.30	9.90	49.08	63.45	-14.37	QP
7 0.23	25.05	0.30	9.90	35.25	52.44	-17.19	Average
8 0.23	37.28	0.30	9.90	47.48	62.44	-14.96	QP
9 0.26	22.64	0.30	9.90	32.84	51.29	-18.45	Average
10 0.26	34.20	0.30	9.90	44.40	61.29	-16.89	QP
11 23.89	16.99	1.21	10.70	28.90	50.00	-21.10	Average
12 23.89	25.84	1.21	10.70	37.75	60.00	-22.25	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

**7.2 Radiated Emissions which fall in the restricted bands**

Test Requirement 47 CFR Part 15, Subpart C 15.205 &amp; 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

**7.2.1 E.U.T. Operation**


Operating Environment:

Temperature: 24.9 °C      Humidity: 54.8 % RH      Atmospheric Pressure: 1010 mbar

**7.2.2 Test Mode Description**

Pre-scan / Final test	Mode Code	Description
Final test	04	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)/ax(HEW20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40)/ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

### 7.2.3 Test Setup Diagram

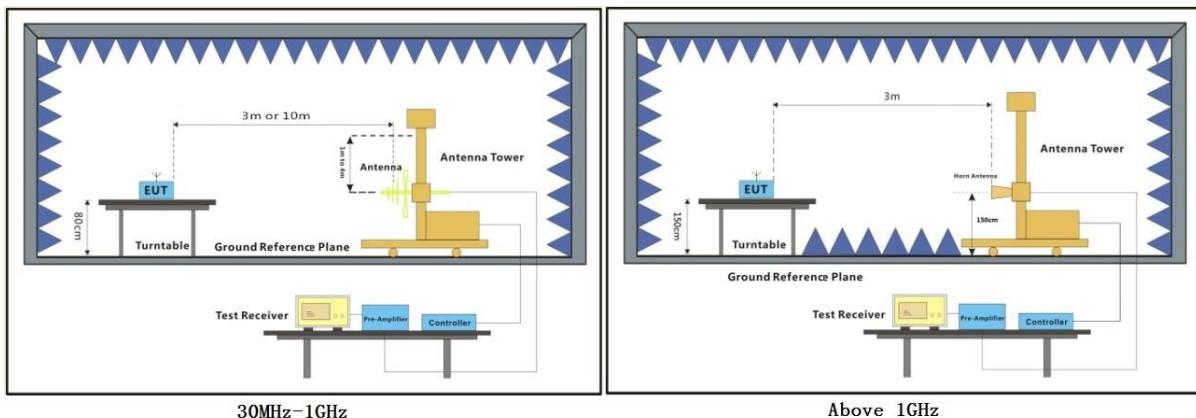


### 7.2.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low; Channel:185

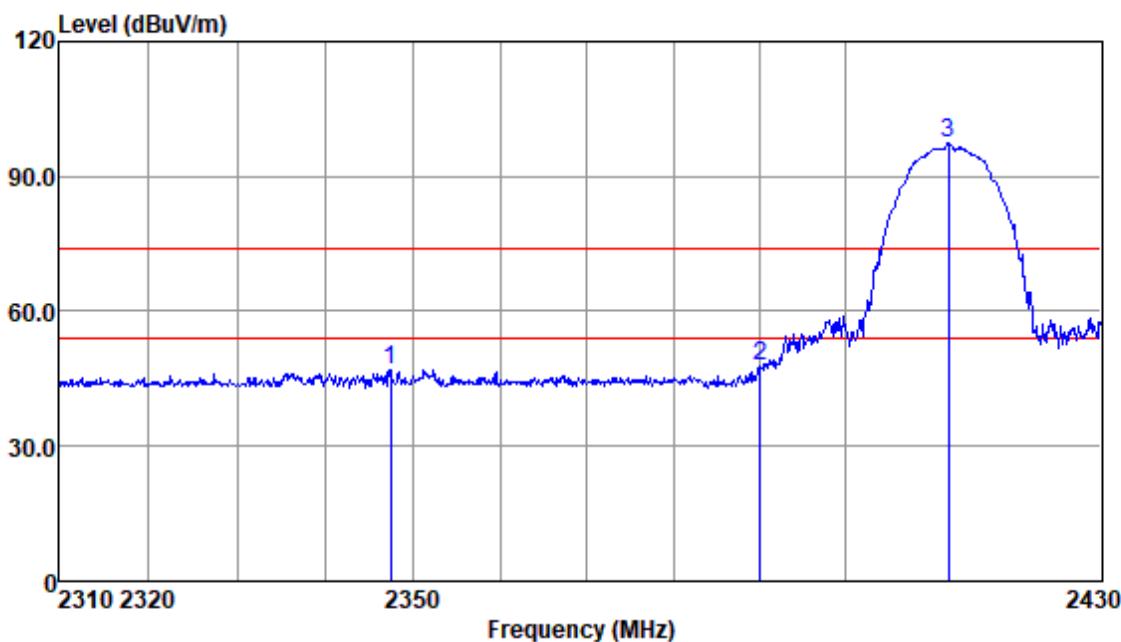


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2347.50	50.22	28.58	3.27	35.14	46.93	74.00	-27.07	Peak
2390.00	51.07	28.80	3.34	35.18	48.03	74.00	-25.97	Peak
2411.98	100.40	28.90	3.33	35.20	97.43	74.00	23.43	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low; Channel:185

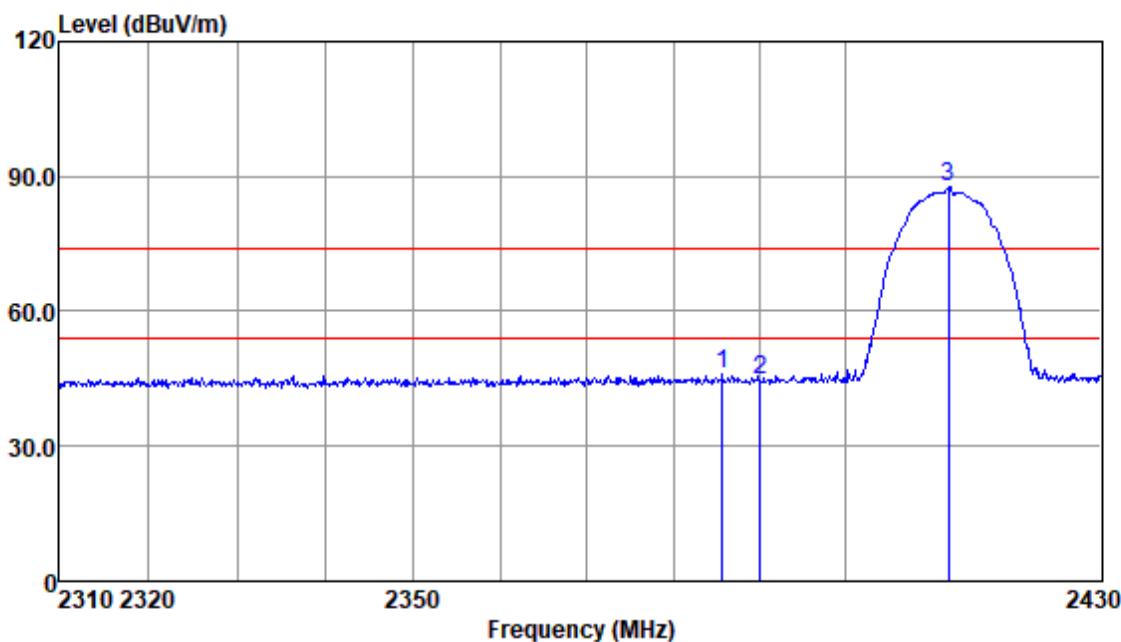


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2385.62	49.10	28.80	3.34	35.18	46.06	74.00	-27.94	Peak
2390.00	47.71	28.80	3.34	35.18	44.67	74.00	-29.33	Peak
2411.98	90.67	28.90	3.33	35.20	87.70	74.00	13.70	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

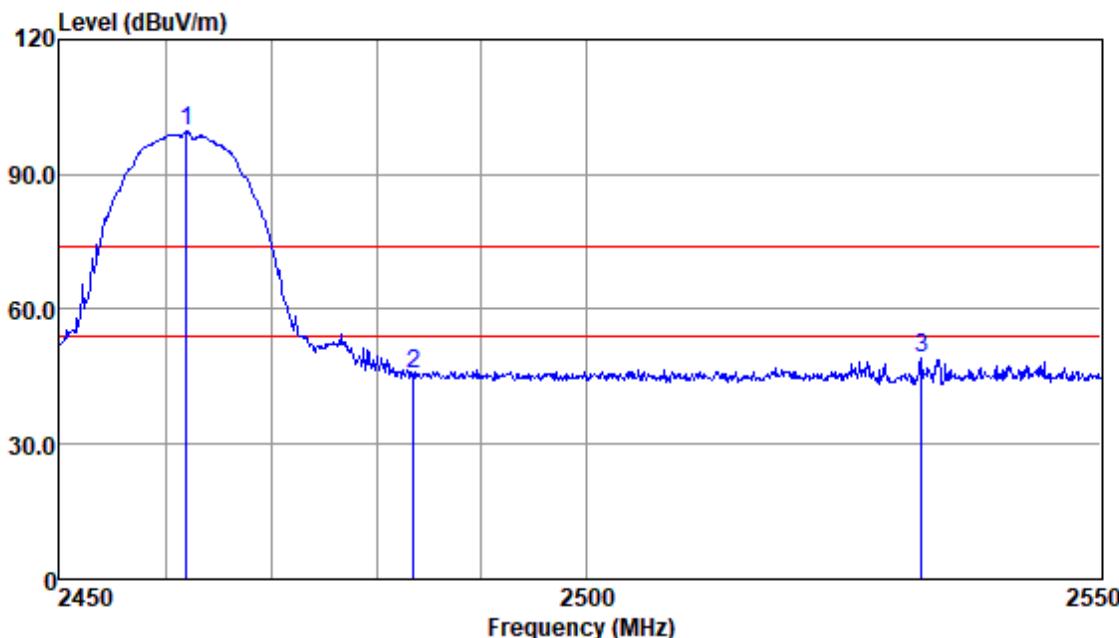


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2461.99	102.36	29.05	3.43	35.24	99.60	74.00	25.60	Peak
2483.50	48.40	29.09	3.36	35.26	45.59	74.00	-28.41	Peak
2532.41	51.92	29.13	3.43	35.31	49.17	74.00	-24.83	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

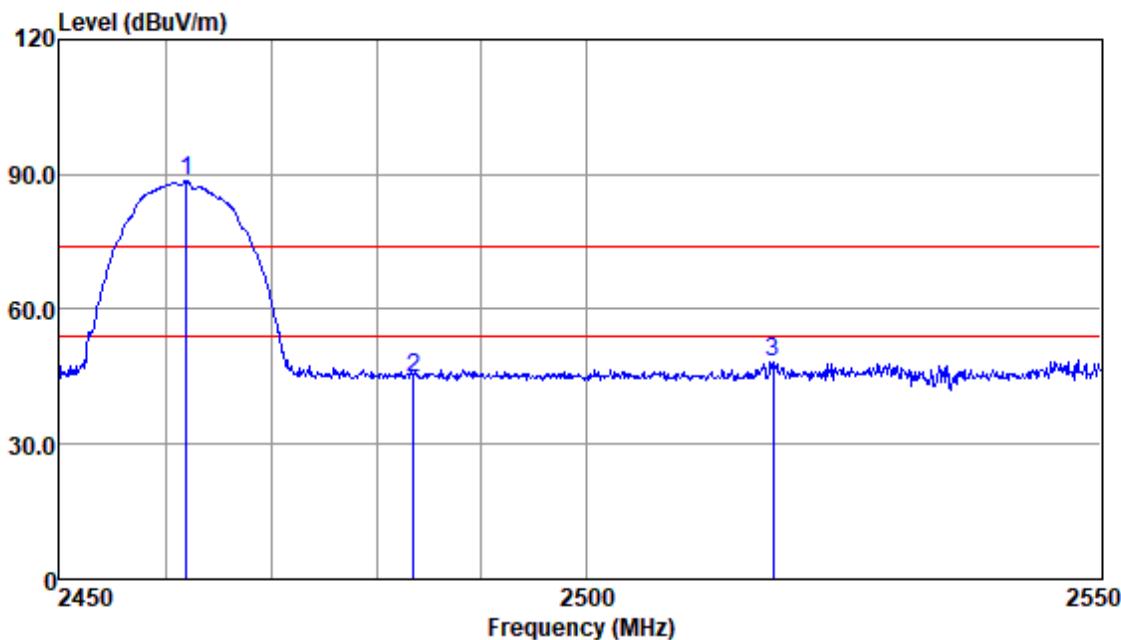


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2461.99	91.31	29.05	3.43	35.24	88.55	74.00	14.55	Peak
2483.50	47.56	29.09	3.36	35.26	44.75	74.00	-29.25	Peak
2518.07	51.13	29.13	3.42	35.30	48.38	74.00	-25.62	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low; Channel:185

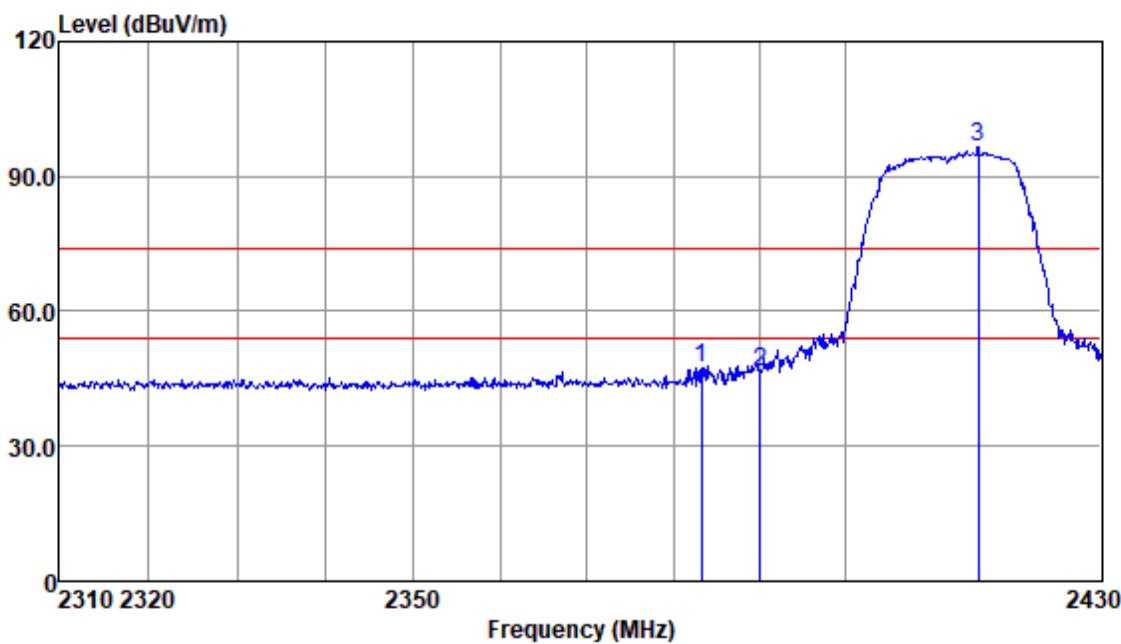


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Emission Limit	Over Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB		
2383.20	50.45	28.76	3.33	35.17	47.37	74.00	-26.63	Peak	
2390.00	49.53	28.80	3.34	35.18	46.49	74.00	-27.51	Peak	
2415.52	99.37	28.90	3.33	35.20	96.40	74.00	22.40	Peak	

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low; Channel:185

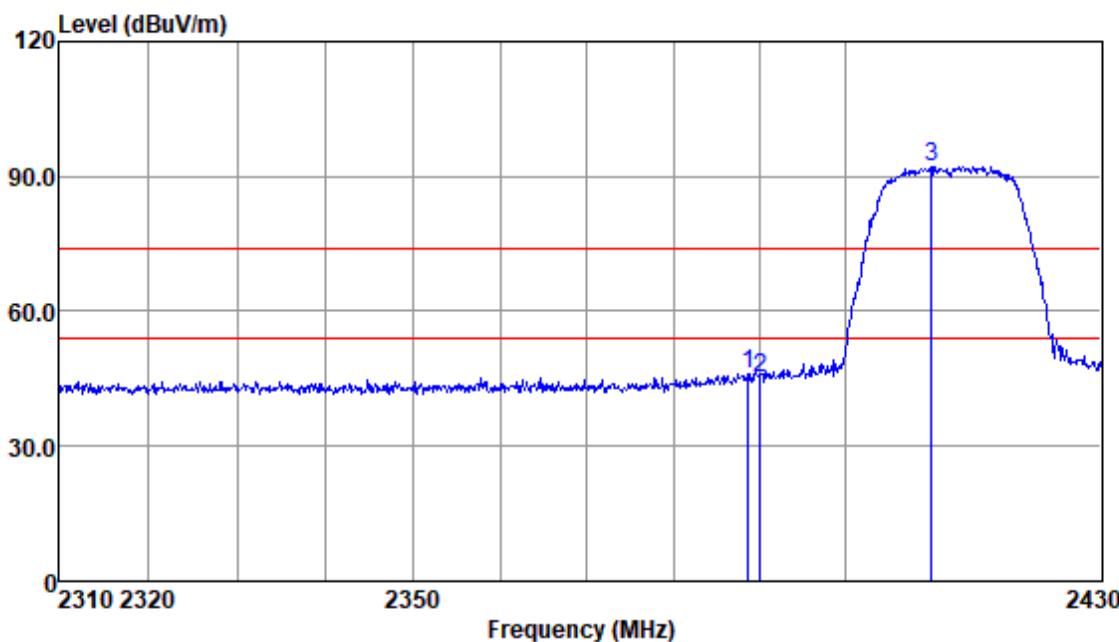


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit		Over Line Limit	Remark
						dBuv	dB/m	dB	dBuV/m
2388.64	49.27	28.80	3.34	35.18	46.23	74.00	-27.77	Peak	
2390.00	48.37	28.80	3.34	35.18	45.33	74.00	-28.67	Peak	
2410.02	95.29	28.89	3.33	35.20	92.31	74.00	18.31	Peak	

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

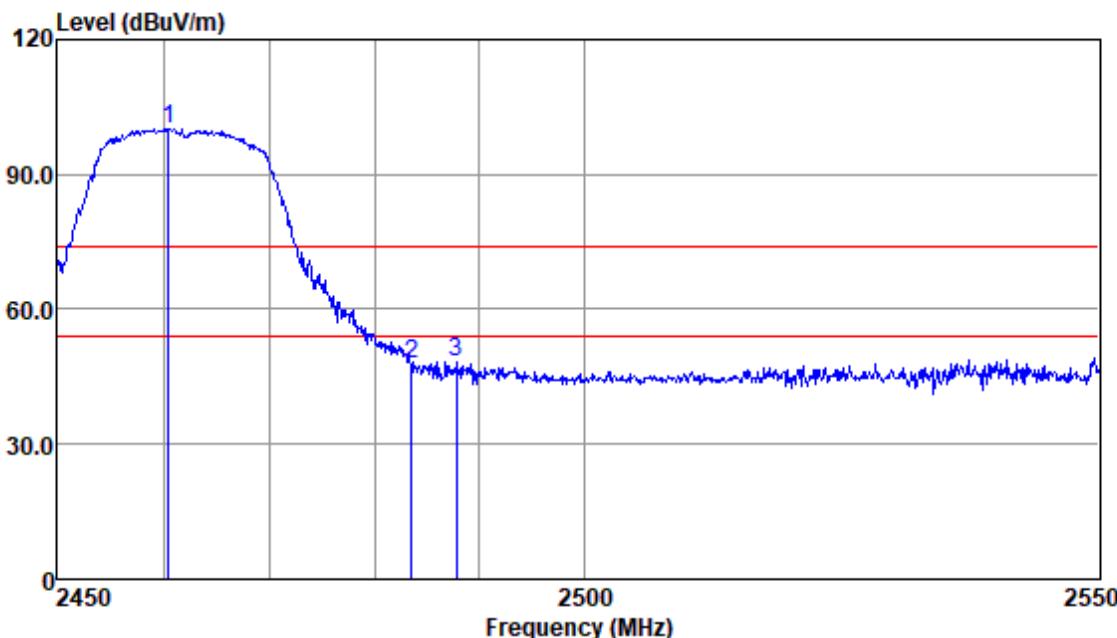


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2460.51	102.89	29.05	3.43	35.24	100.13	74.00	26.13	Peak
2483.50	50.67	29.09	3.36	35.26	47.86	74.00	-26.14	Peak
2487.83	51.11	29.09	3.36	35.26	48.30	74.00	-25.70	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

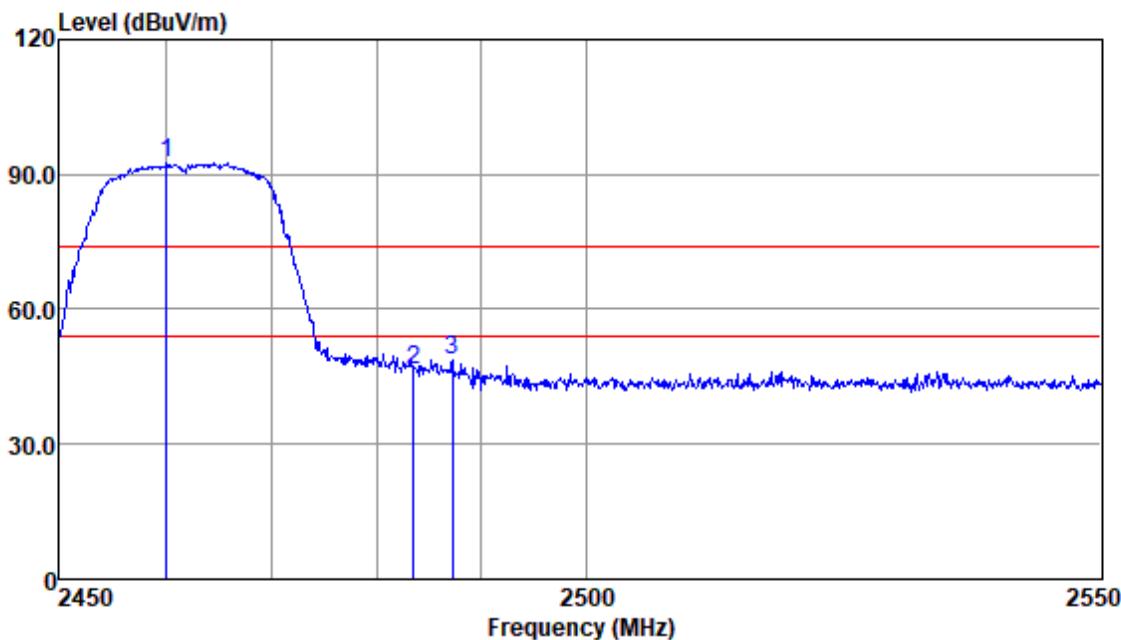


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2460.12	95.29	29.04	3.39	35.24	92.48	74.00	18.48	Peak
2483.50	49.15	29.09	3.36	35.26	46.34	74.00	-27.66	Peak
2487.23	51.44	29.09	3.36	35.26	48.63	74.00	-25.37	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low; Channel:185

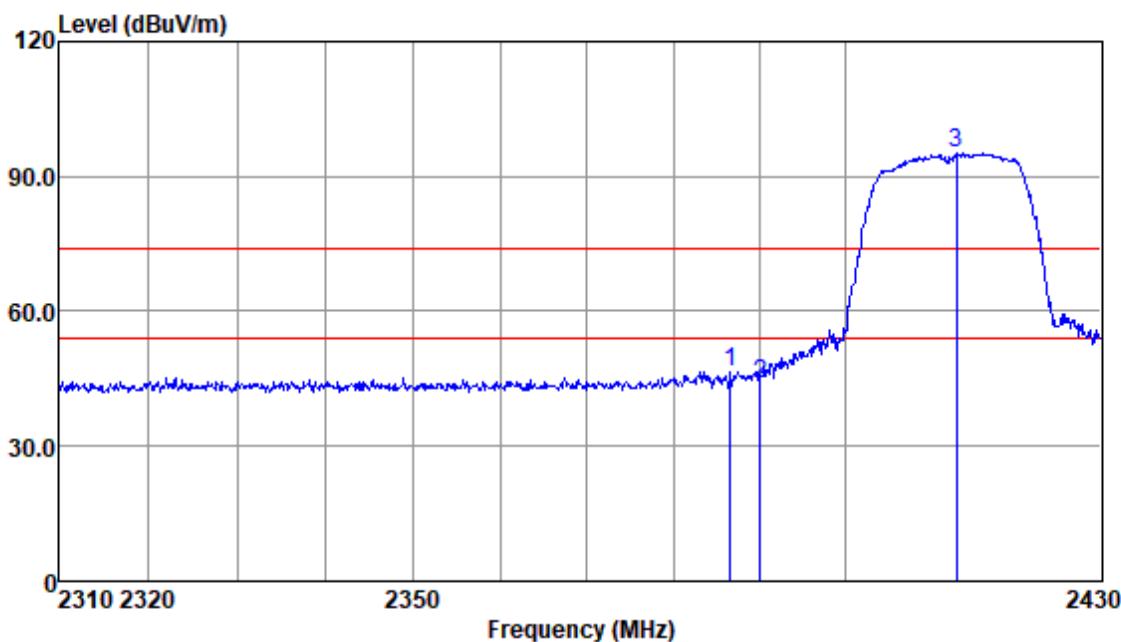


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2386.58	49.63	28.80	3.34	35.18	46.59	74.00	-27.41	Peak
2390.00	47.03	28.80	3.34	35.18	43.99	74.00	-30.01	Peak
2412.95	98.15	28.90	3.33	35.20	95.18	74.00	21.18	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low; Channel:185

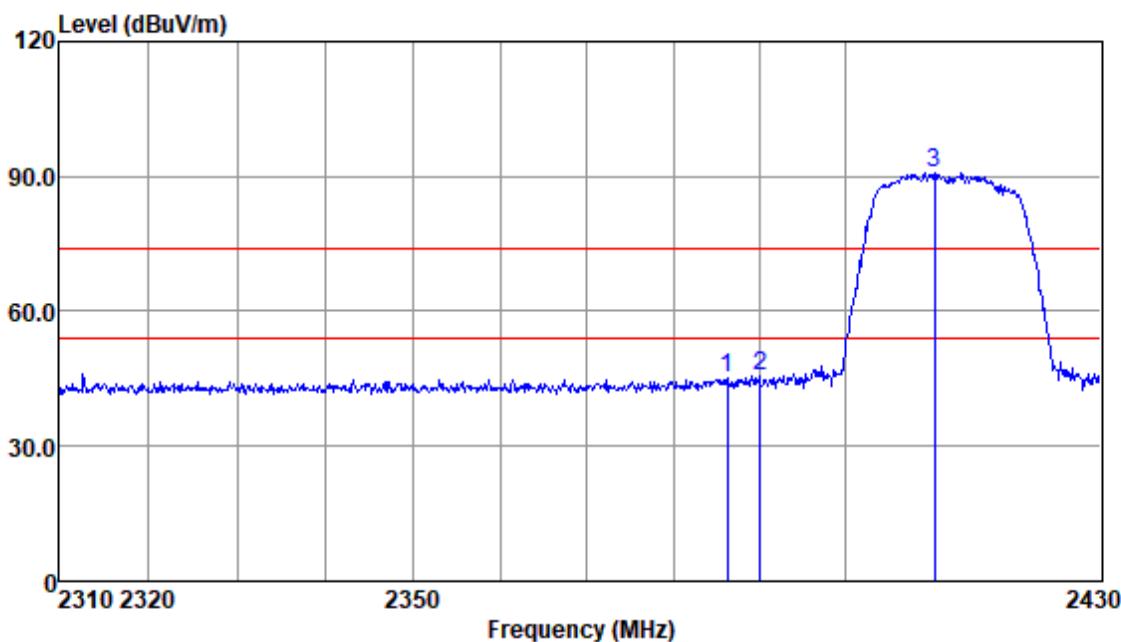


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2386.22	48.08	28.80	3.34	35.18	45.04	74.00	-28.96	Peak
2390.00	48.57	28.80	3.34	35.18	45.53	74.00	-28.47	Peak
2410.39	93.71	28.89	3.33	35.20	90.73	74.00	16.73	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

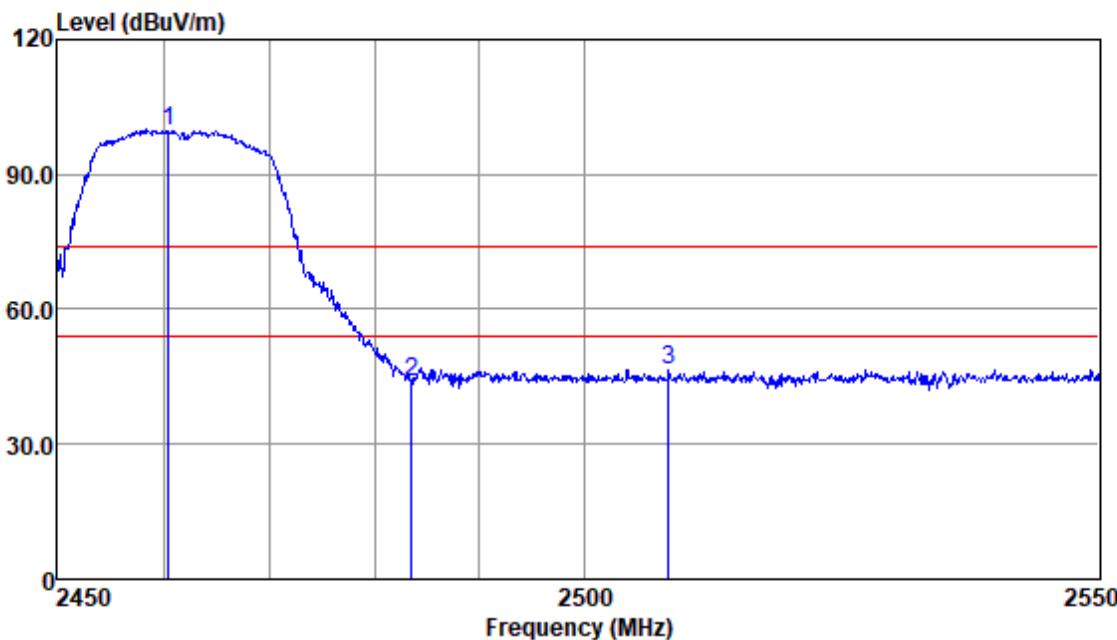


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Emission Limit	Over Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB		
2460.51	102.44	29.05	3.43	35.24	99.68	74.00	25.68	-25.68	Peak
2483.50	46.45	29.09	3.36	35.26	43.64	74.00	-30.36	-64.36	Peak
2508.22	49.45	29.13	3.39	35.28	46.69	74.00	-27.31	-101.31	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

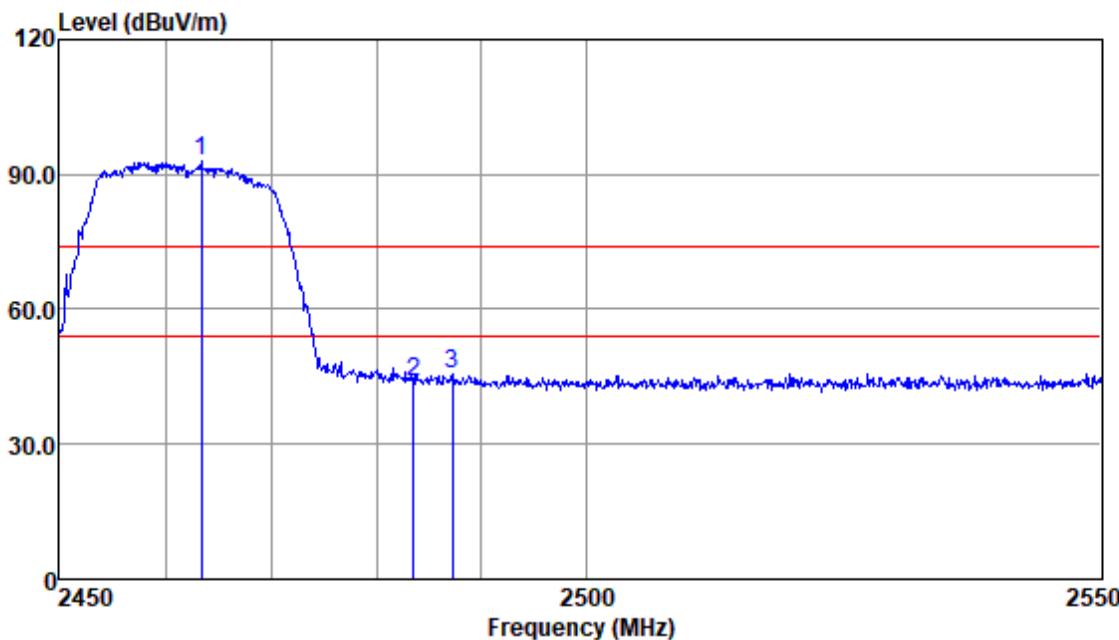


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2463.37	95.69	29.05	3.43	35.24	92.93	74.00	18.93	Peak
2483.50	46.69	29.09	3.36	35.26	43.88	74.00	-30.12	Peak
2487.23	48.42	29.09	3.36	35.26	45.61	74.00	-28.39	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low; Channel:185

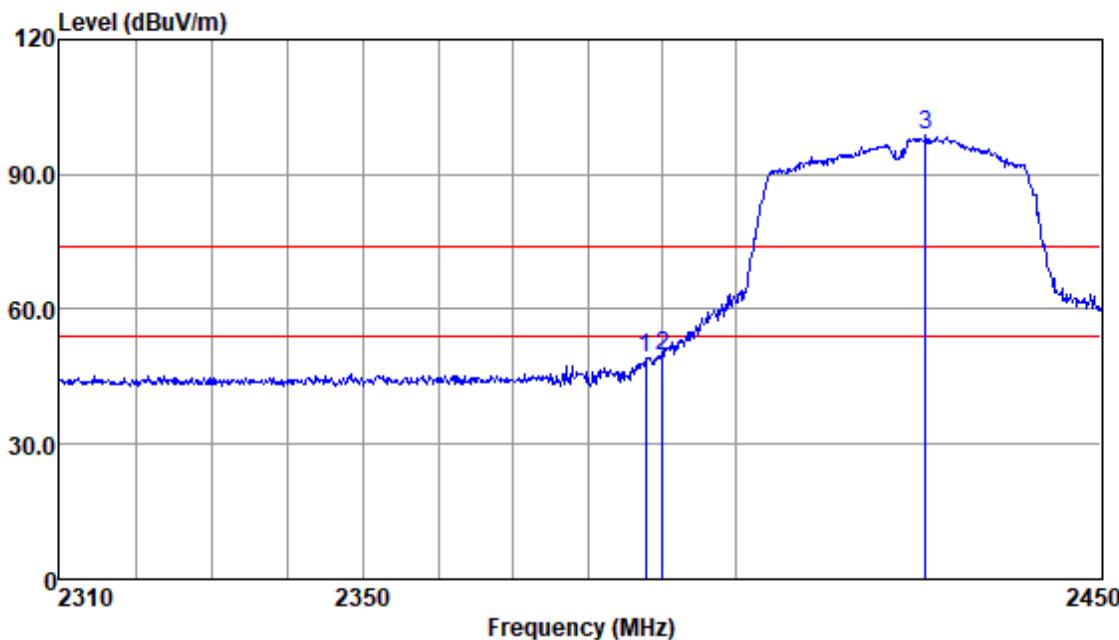


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Emission Limit	Line Limit	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dBuv/m	dB	
2387.81	52.36	28.80	3.34	35.18	49.32	74.00	-24.68	Peak	
2390.00	52.77	28.80	3.34	35.18	49.73	74.00	-24.27	Peak	
2425.76	101.85	28.96	3.34	35.21	98.94	74.00	24.94	Peak	

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low; Channel:185

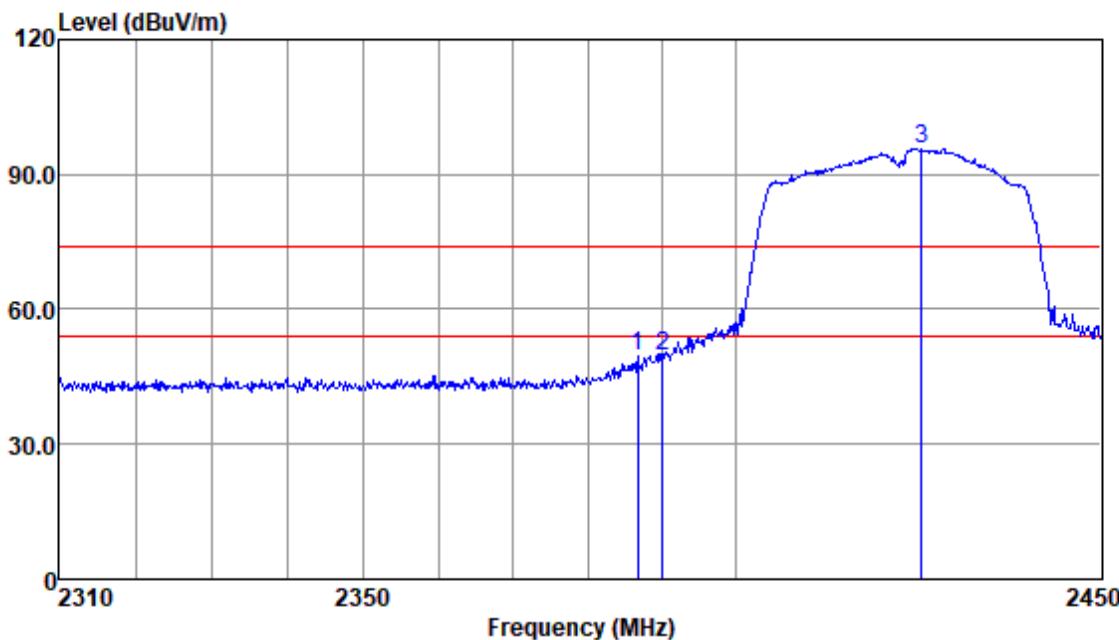


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2386.68	52.59	28.80	3.34	35.18	49.55	74.00	-24.45	Peak
2390.00	52.67	28.80	3.34	35.18	49.63	74.00	-24.37	Peak
2425.19	98.63	28.96	3.34	35.21	95.72	74.00	21.72	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

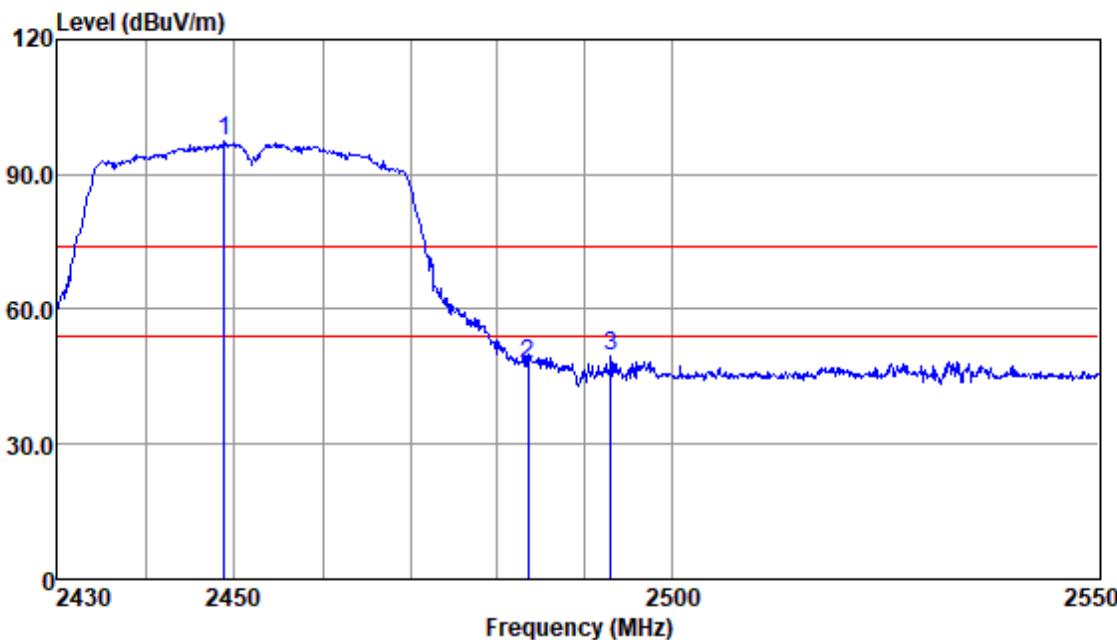


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2448.81	100.12	29.02	3.36	35.23	97.27	74.00	23.27	Peak
2483.50	50.52	29.09	3.36	35.26	47.71	74.00	-26.29	Peak
2493.00	52.24	29.10	3.33	35.26	49.41	74.00	-24.59	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

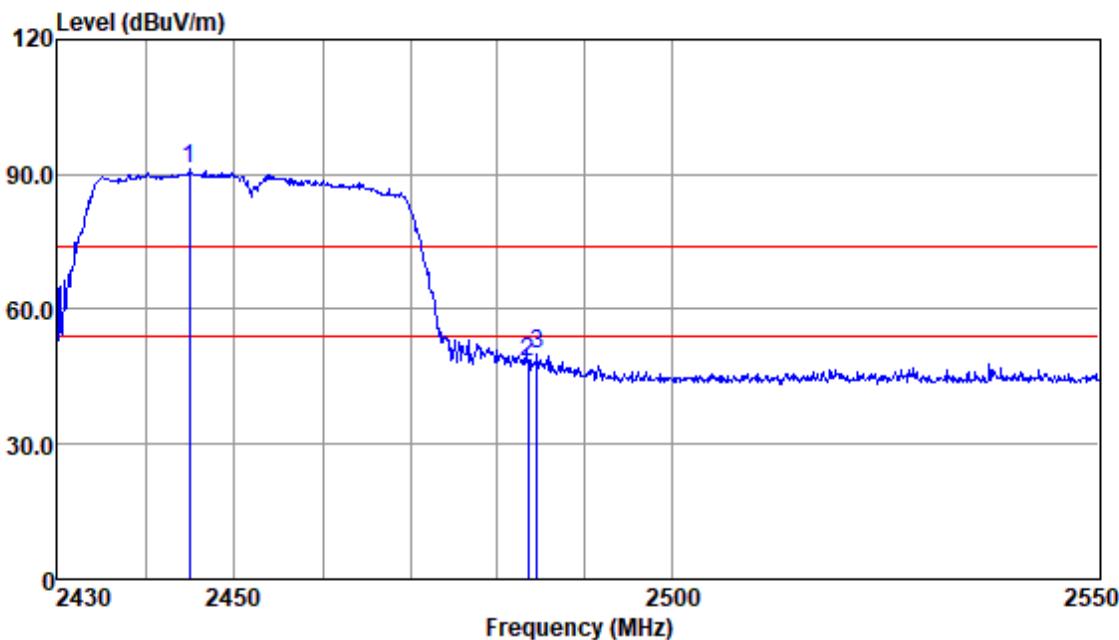


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2444.92	93.96	28.99	3.32	35.22	91.05	74.00	17.05	Peak
2483.50	51.00	29.09	3.36	35.26	48.19	74.00	-25.81	Peak
2484.48	53.00	29.09	3.36	35.26	50.19	74.00	-23.81	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low; Channel:185

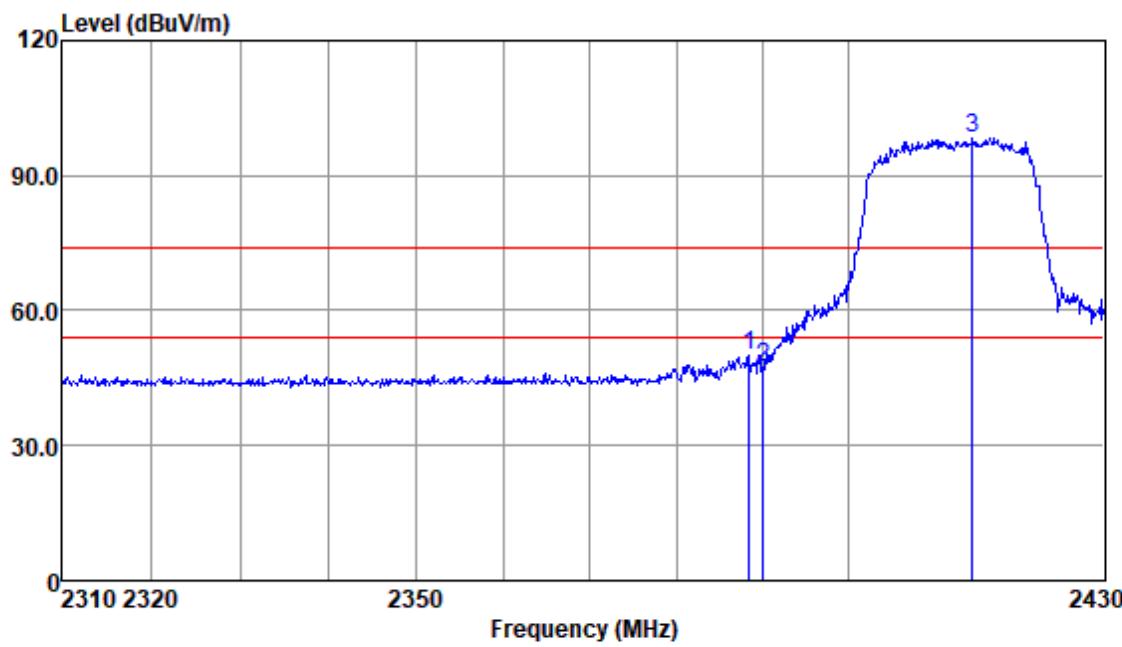


Antenna Polarity :HORIZONTAL  
EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2388.40	52.87	28.80	3.34	35.18	49.83	74.00	-24.17	Peak
2390.00	50.30	28.80	3.34	35.18	47.26	74.00	-26.74	Peak
2414.42	101.37	28.90	3.33	35.20	98.40	74.00	24.40	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low; Channel:185

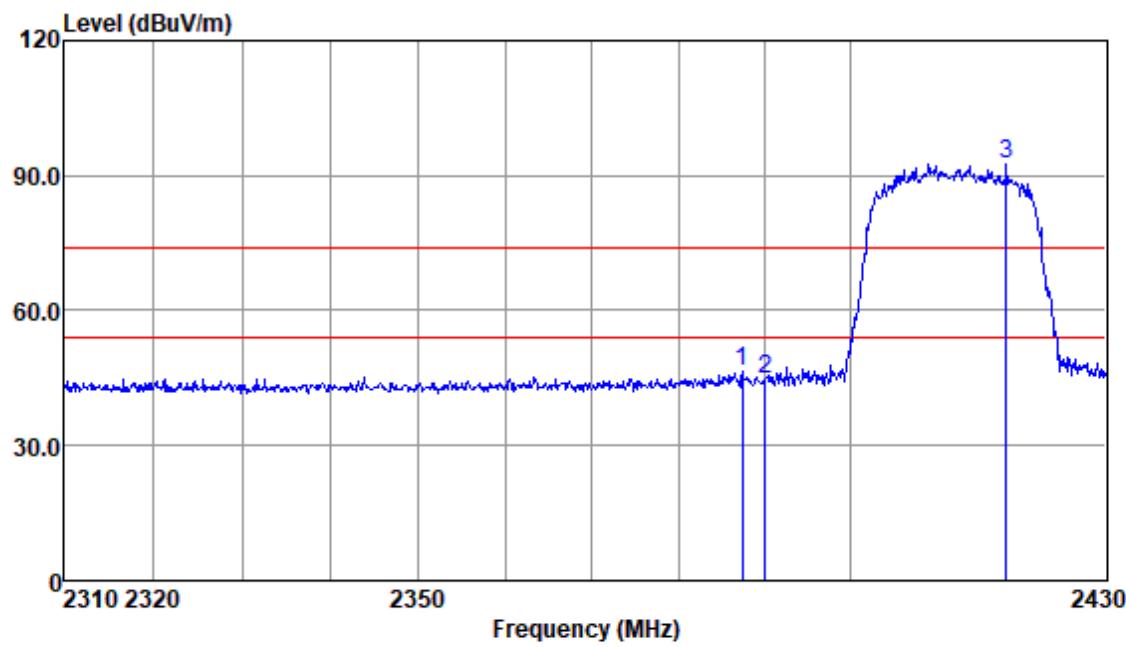


Antenna Polarity : VERTICAL  
EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2387.43	49.58	28.80	3.34	35.18	46.54	74.00	-27.46	Peak
2390.00	47.67	28.80	3.34	35.18	44.63	74.00	-29.37	Peak
2418.22	95.72	28.92	3.33	35.21	92.76	74.00	18.76	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

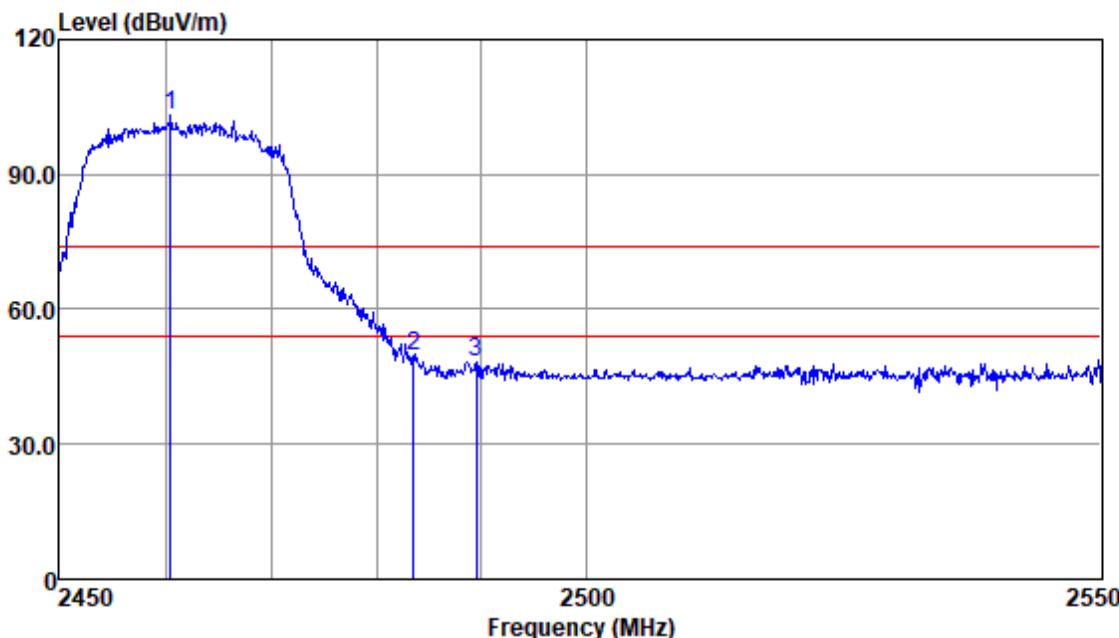


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Emission Limit	Over Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB		
2460.51	106.04	29.05	3.43	35.24	103.28	74.00	29.28	Peak	
2483.50	52.41	29.09	3.36	35.26	49.60	74.00	-24.40	Peak	
2489.52	51.29	29.10	3.33	35.26	48.46	74.00	-25.54	Peak	

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

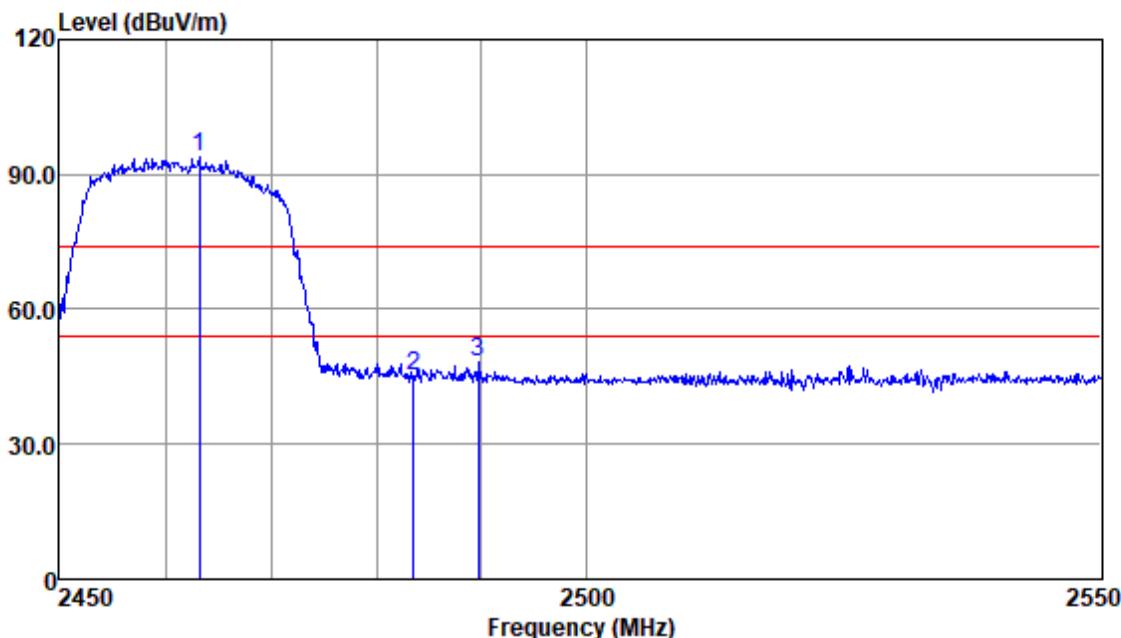


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Emission Limit	Over Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB		
2463.17	96.83	29.05	3.43	35.24	94.07	74.00	20.07	Peak	
2483.50	48.07	29.09	3.36	35.26	45.26	74.00	-28.74	Peak	
2489.72	51.15	29.10	3.33	35.26	48.32	74.00	-25.68	Peak	

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low; Channel:185

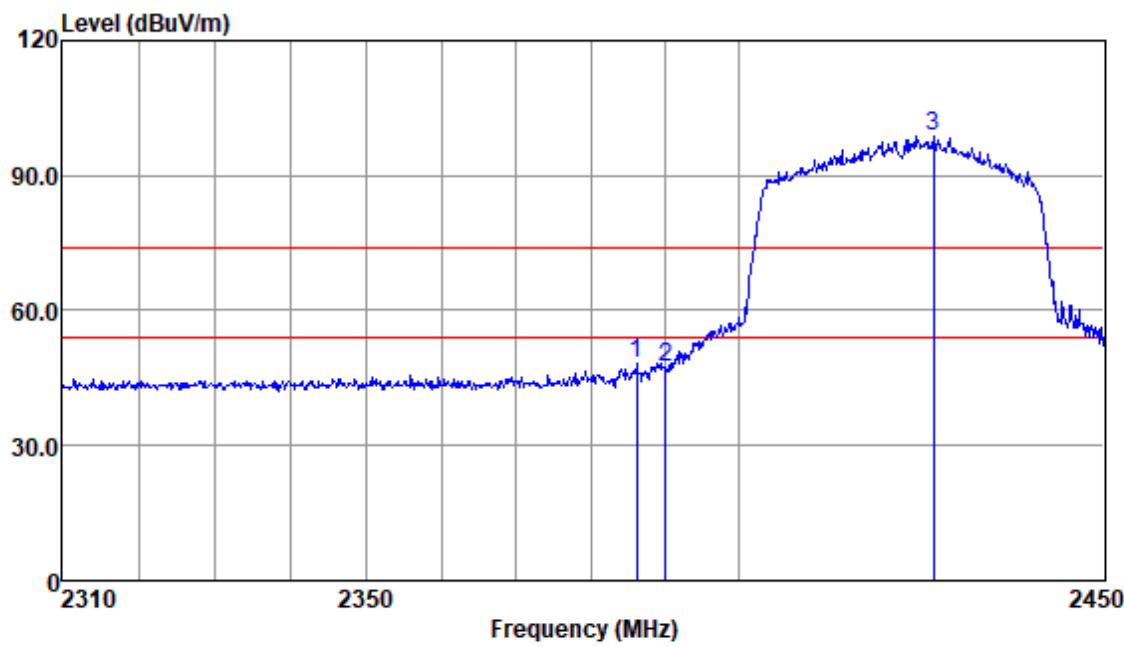


Antenna Polarity :HORIZONTAL  
EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2386.12	51.20	28.80	3.34	35.18	48.16	74.00	-25.84	Peak
2390.00	50.53	28.80	3.34	35.18	47.49	74.00	-26.51	Peak
2426.47	101.82	28.96	3.34	35.21	98.91	74.00	24.91	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low; Channel:185

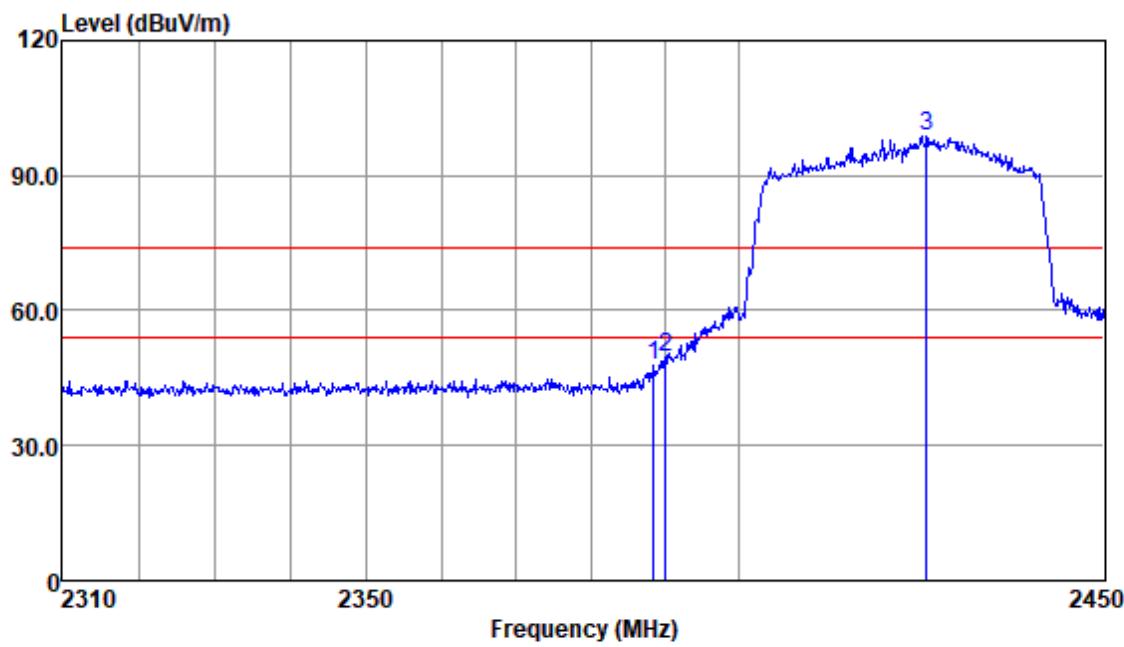


Antenna Polarity : VERTICAL  
EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2388.37	51.03	28.80	3.34	35.18	47.99	74.00	-26.01	Peak
2390.00	52.84	28.80	3.34	35.18	49.80	74.00	-24.20	Peak
2425.47	101.61	28.96	3.34	35.21	98.70	74.00	24.70	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

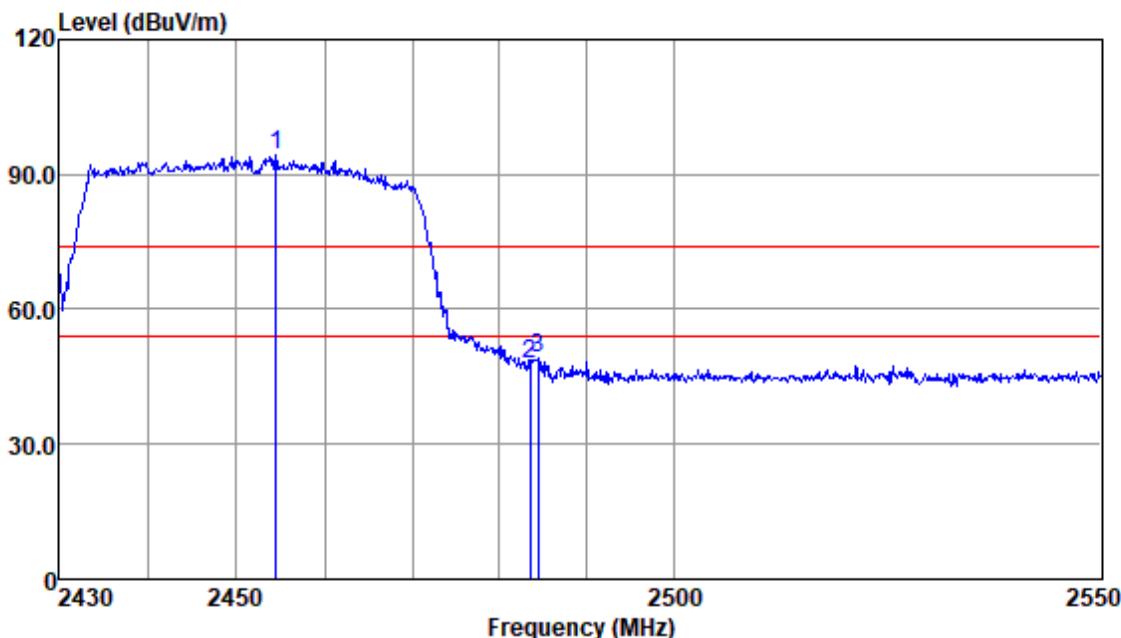


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2454.49	96.92	29.04	3.39	35.24	94.11	74.00	20.11	Peak
2483.50	50.76	29.09	3.36	35.26	47.95	74.00	-26.05	Peak
2484.36	51.77	29.09	3.36	35.26	48.96	74.00	-25.04	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

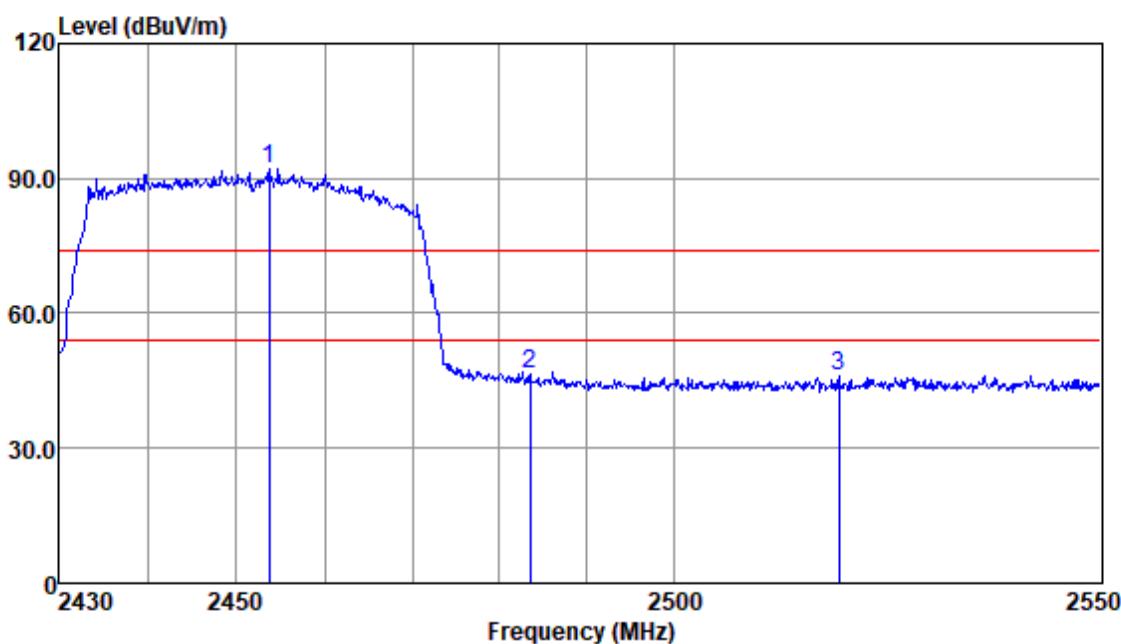

Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Emission Limit	Over Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB		
2453.66	95.01	29.04	3.39	35.24	92.20	74.00	18.20	Peak	
2483.50	49.48	29.09	3.36	35.26	46.67	74.00	-27.33	Peak	
2519.21	48.74	29.13	3.42	35.30	45.99	74.00	-28.01	Peak	

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

### 7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 &amp; 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

#### 7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)/ax(HEW20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40)/ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

#### 7.3.3 Test Setup Diagram

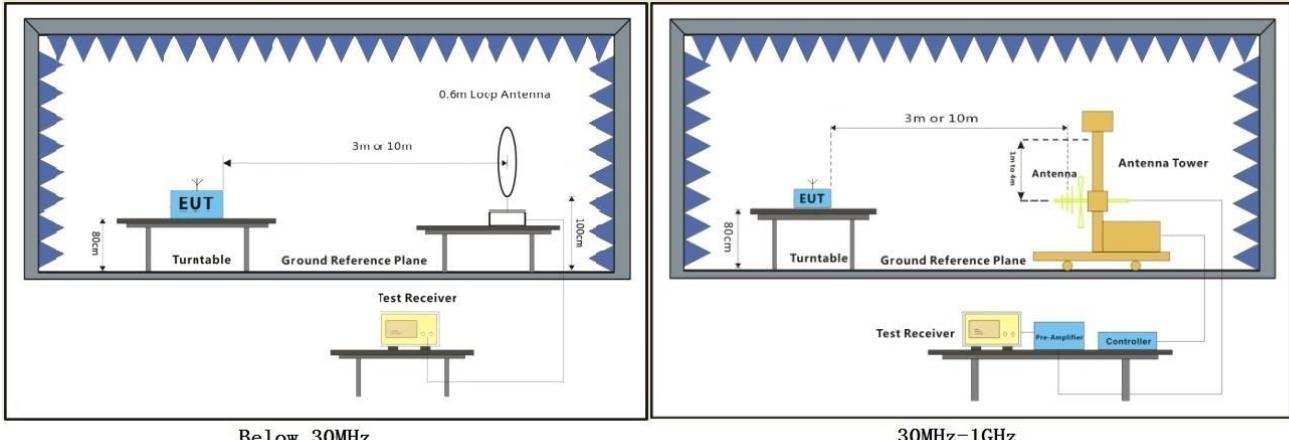


**7.3.4 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 04; Polarity: Horizontal

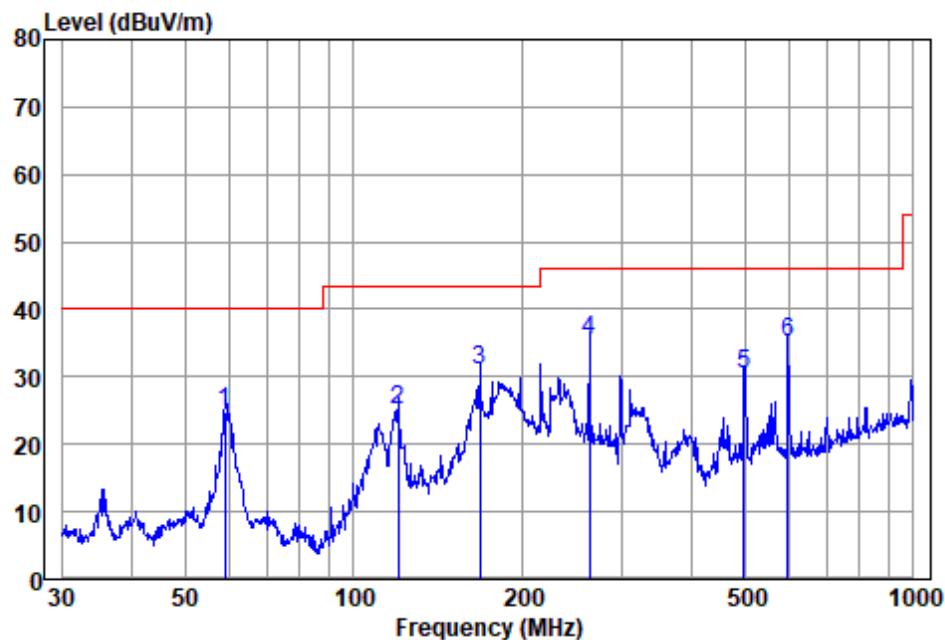

Antenna Polarity :HORIZONTAL


EUT/Project :1328AT

Test mode :04

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	58.819	43.19	13.14	1.54	33.20	24.67	40.00	-15.33	QP
2	119.856	44.66	11.10	2.30	33.11	24.95	43.50	-18.55	QP
3	167.824	48.15	12.90	2.80	33.00	30.85	43.50	-12.65	QP
4	263.819	52.73	12.11	3.45	32.80	35.49	46.00	-10.51	QP
5	497.677	40.20	17.96	4.91	32.70	30.37	46.00	-15.63	QP
6	595.133	42.55	19.85	5.44	32.70	35.14	46.00	-10.86	QP

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Vertical

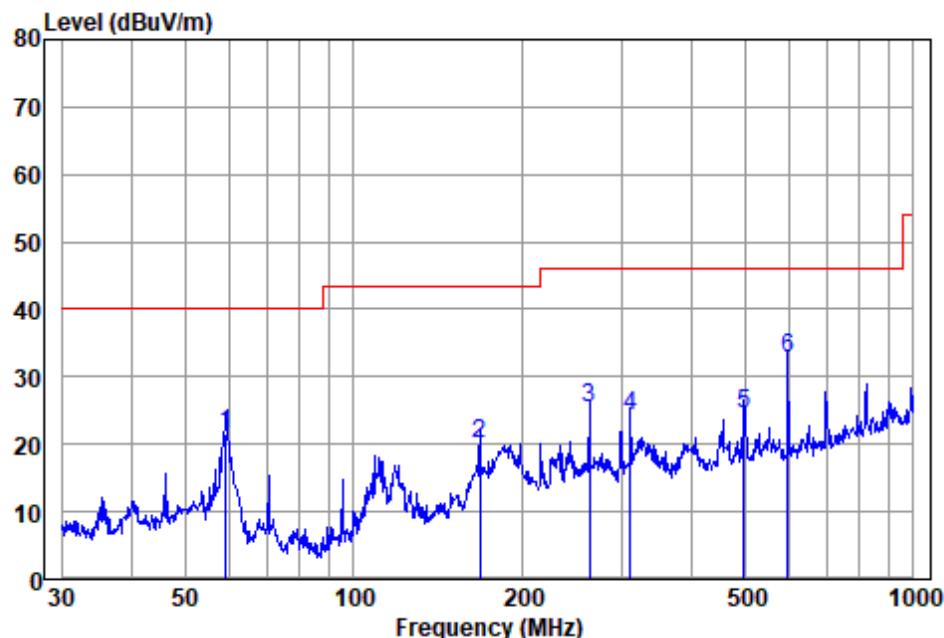

Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Test mode : 04

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	59.025	40.03	13.10	1.55	33.20	21.48	40.00	-18.52 QP
2	167.824	37.34	12.90	2.80	33.00	20.04	43.50	-23.46 QP
3	263.819	42.60	12.11	3.45	32.80	25.36	46.00	-20.64 QP
4	312.179	39.38	13.79	3.85	32.77	24.25	46.00	-21.75 QP
5	497.677	34.26	17.96	4.91	32.70	24.43	46.00	-21.57 QP
6	595.133	40.32	19.85	5.44	32.70	32.91	46.00	-13.09 QP

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

## 7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 &amp; 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

### 7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 24.8 °C      Humidity: 54.8 % RH      Atmospheric Pressure: 1010 mbar

### 7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)/ax(HEW20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40)/ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

### 7.4.3 Test Setup Diagram

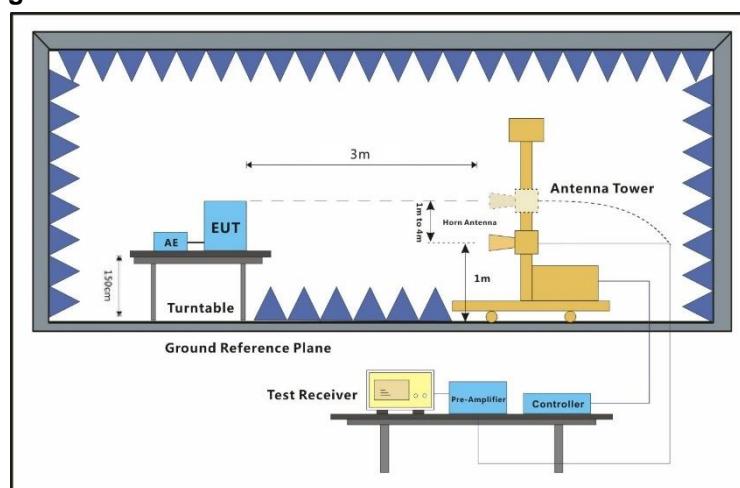


**7.4.4 Measurement Procedure and Data**

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

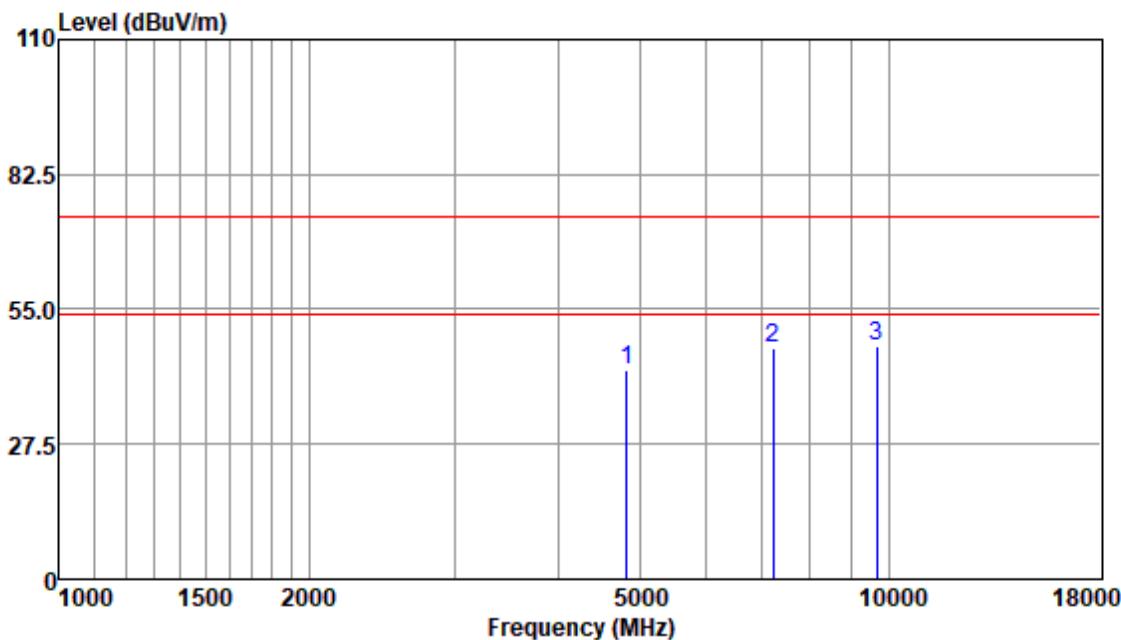


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4824.02	40.45	33.60	5.41	36.79	42.67	74.00	-31.33	Peak
7236.05	38.99	36.29	7.18	35.50	46.96	74.00	-27.04	Peak
9648.26	34.87	37.71	8.64	33.56	47.66	74.00	-26.34	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

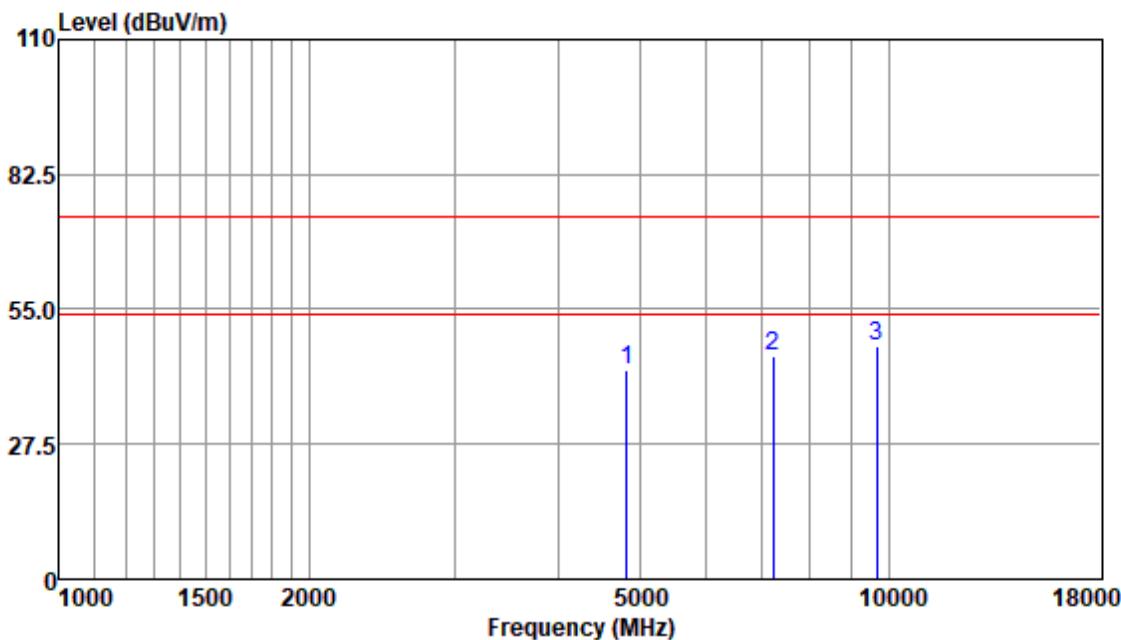


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4824.02	40.48	33.60	5.41	36.79	42.70	74.00	-31.30	Peak
7236.05	37.63	36.29	7.18	35.50	45.60	74.00	-28.40	Peak
9648.26	34.75	37.71	8.64	33.56	47.54	74.00	-26.46	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

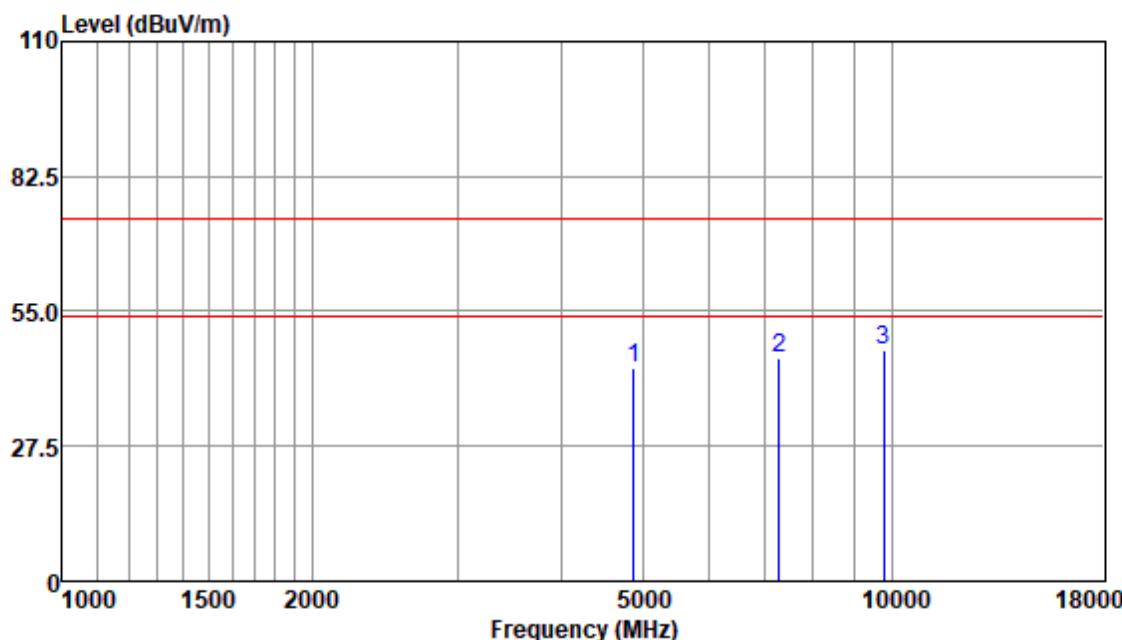


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	41.18	33.66	5.28	36.81	43.31	74.00	-30.69	Peak
7311.12	37.11	36.32	7.34	35.44	45.33	74.00	-28.67	Peak
9748.37	34.14	37.54	8.84	33.50	47.02	74.00	-26.98	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

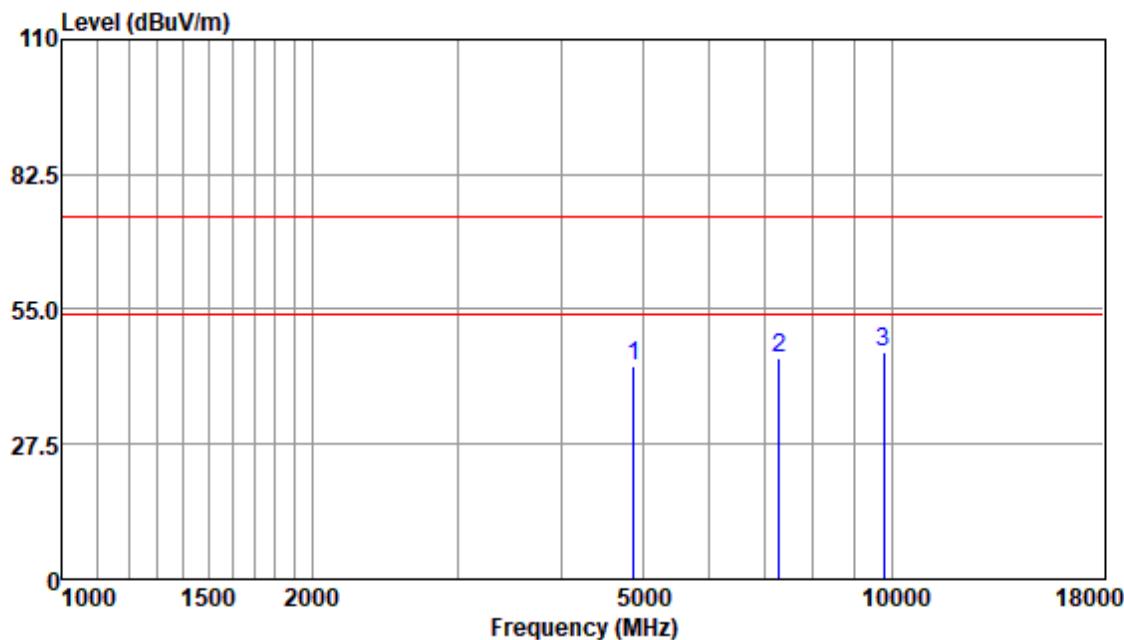


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	41.23	33.66	5.28	36.81	43.36	74.00	-30.64	Peak
7311.12	36.92	36.32	7.34	35.44	45.14	74.00	-28.86	Peak
9748.37	33.35	37.54	8.84	33.50	46.23	74.00	-27.77	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

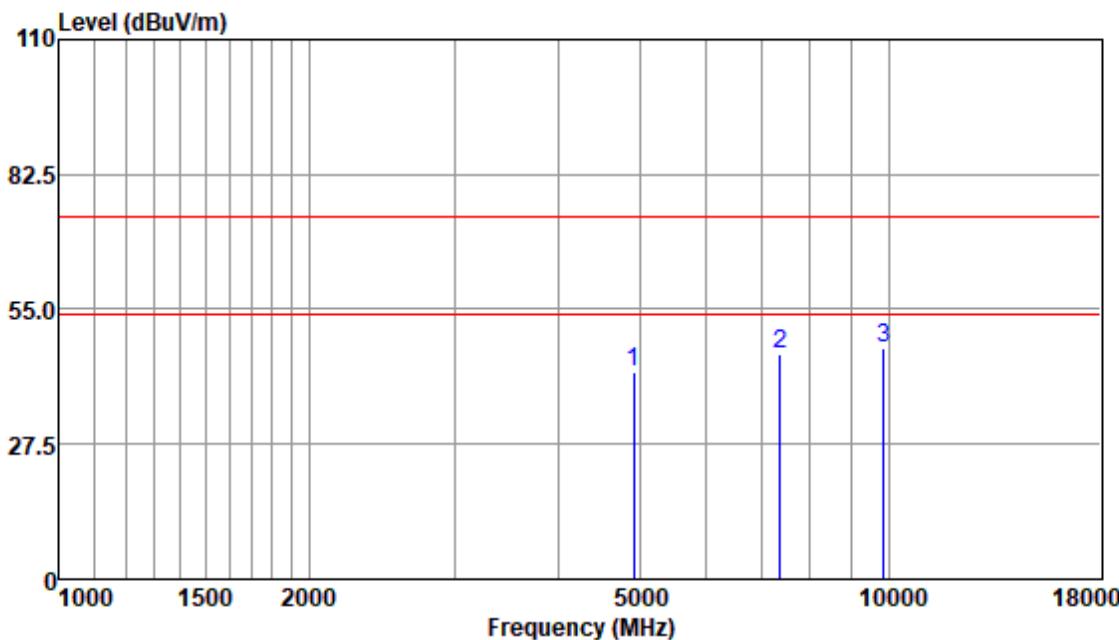


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4924.72	39.85	33.64	5.37	36.82	42.04	74.00	-31.96	Peak
7386.07	37.54	36.36	7.29	35.37	45.82	74.00	-28.18	Peak
9838.31	33.92	37.60	8.82	33.45	46.89	74.00	-27.11	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

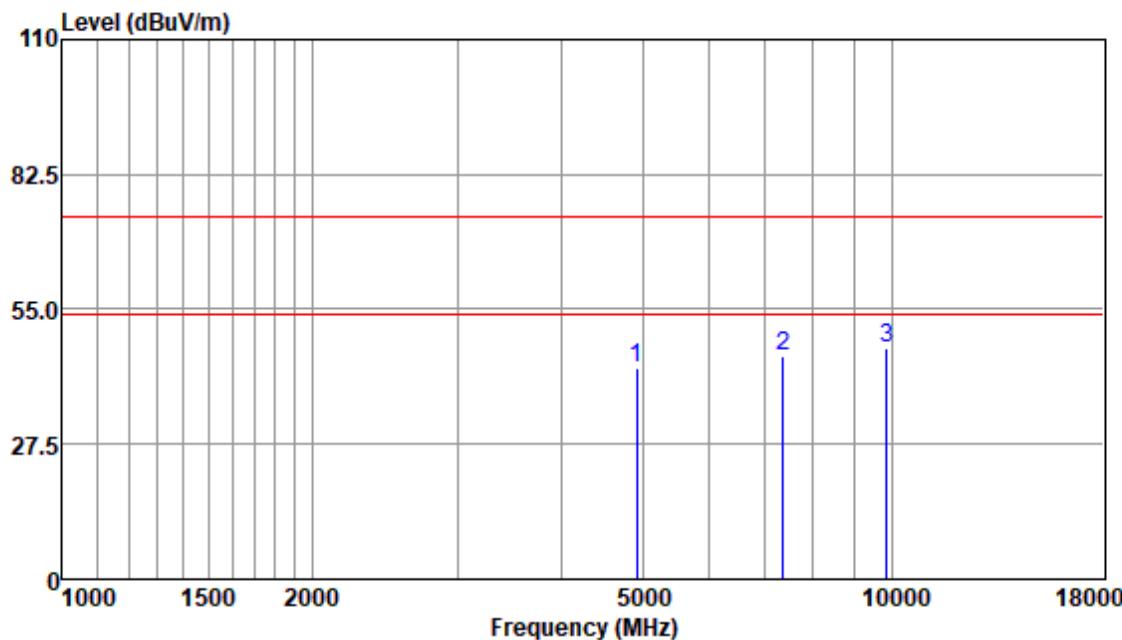


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4924.72	40.74	33.64	5.37	36.82	42.93	74.00	-31.07	Peak
7386.07	37.07	36.36	7.29	35.37	45.35	74.00	-28.65	Peak
9848.31	33.92	37.60	8.82	33.45	46.89	74.00	-27.11	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

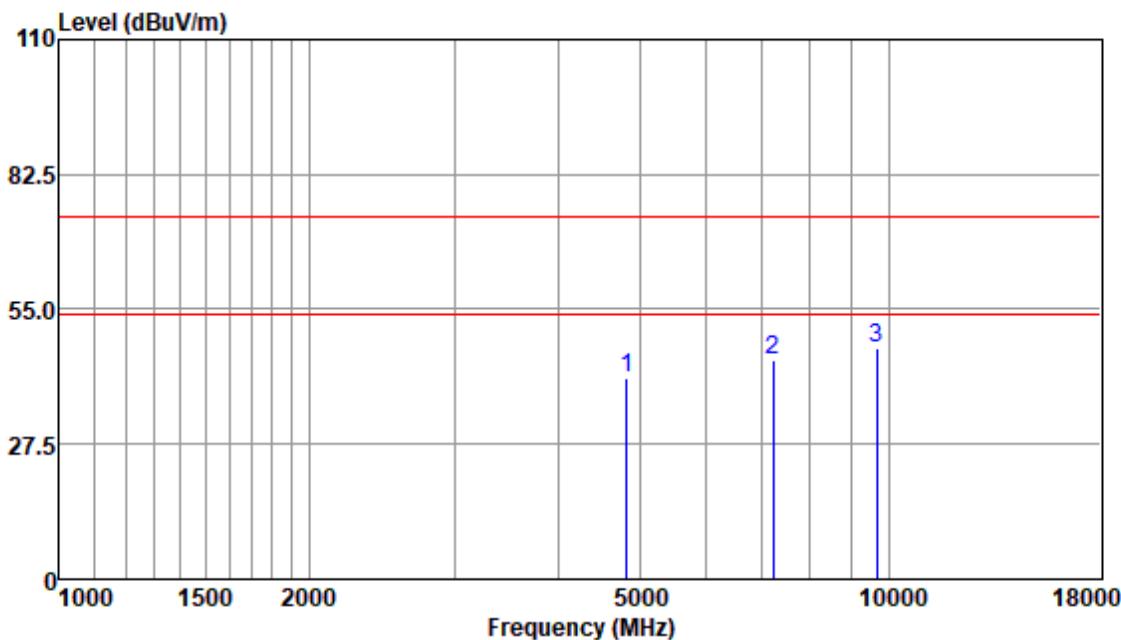


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4824.02	38.86	33.60	5.41	36.79	41.08	74.00	-32.92	Peak
7236.05	36.54	36.29	7.18	35.50	44.51	74.00	-29.49	Peak
9648.26	34.41	37.71	8.64	33.56	47.20	74.00	-26.80	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

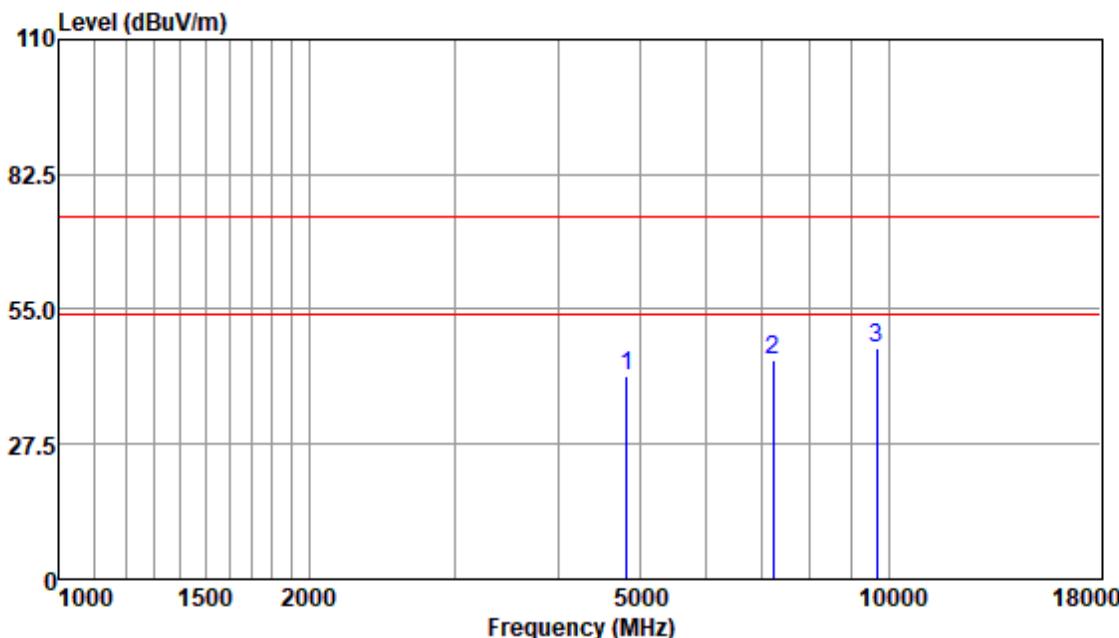


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Emission Limit	Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB		
4824.02	39.17	33.60	5.41	36.79	41.39	74.00	-32.61	Peak	
7236.05	36.83	36.29	7.18	35.50	44.80	74.00	-29.20	Peak	
9648.26	34.11	37.71	8.64	33.56	46.90	74.00	-27.10	Peak	

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

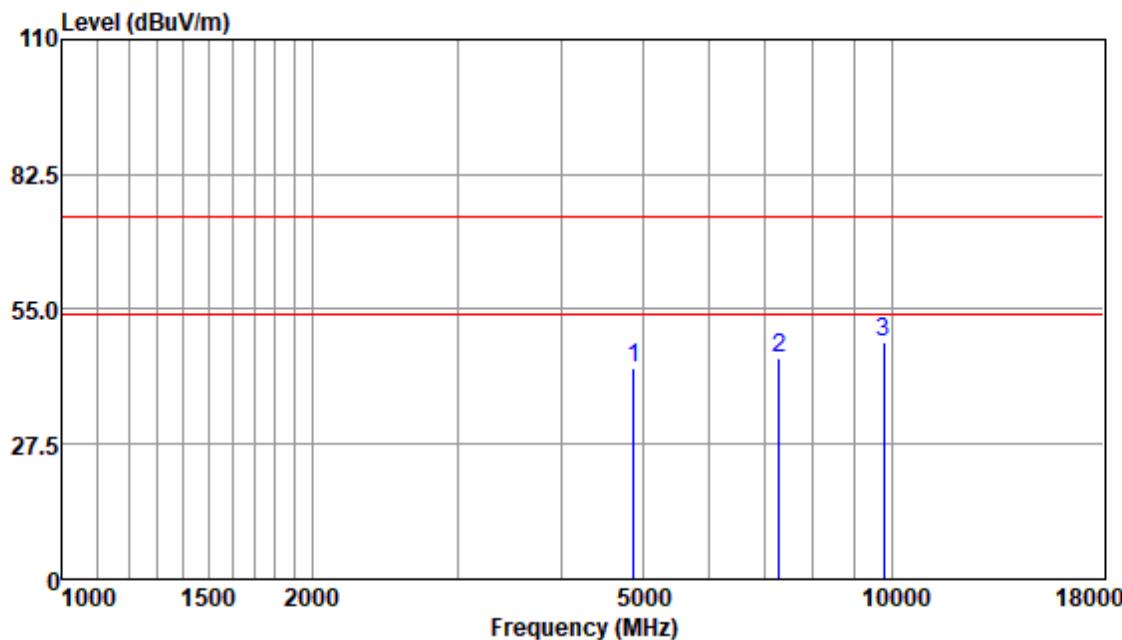


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	40.98	33.66	5.28	36.81	43.11	74.00	-30.89	Peak
7311.12	36.89	36.32	7.34	35.44	45.11	74.00	-28.89	Peak
9748.37	35.27	37.54	8.84	33.50	48.15	74.00	-25.85	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

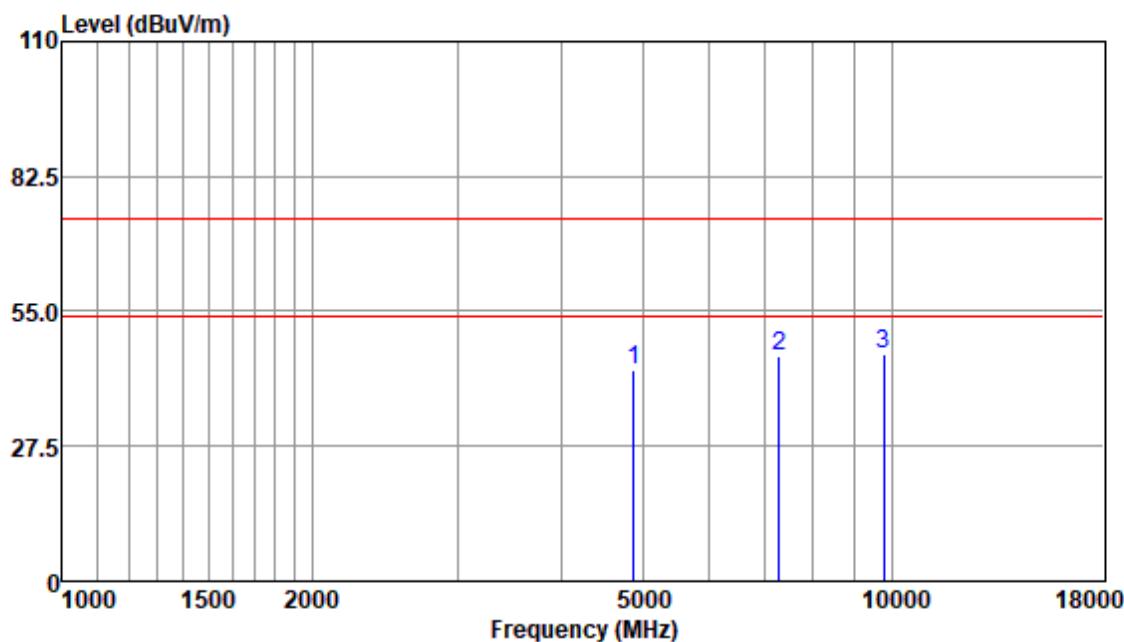


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	40.85	33.66	5.28	36.81	42.98	74.00	-31.02	Peak
7311.12	37.78	36.32	7.34	35.44	46.00	74.00	-28.00	Peak
9748.37	33.57	37.54	8.84	33.50	46.45	74.00	-27.55	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

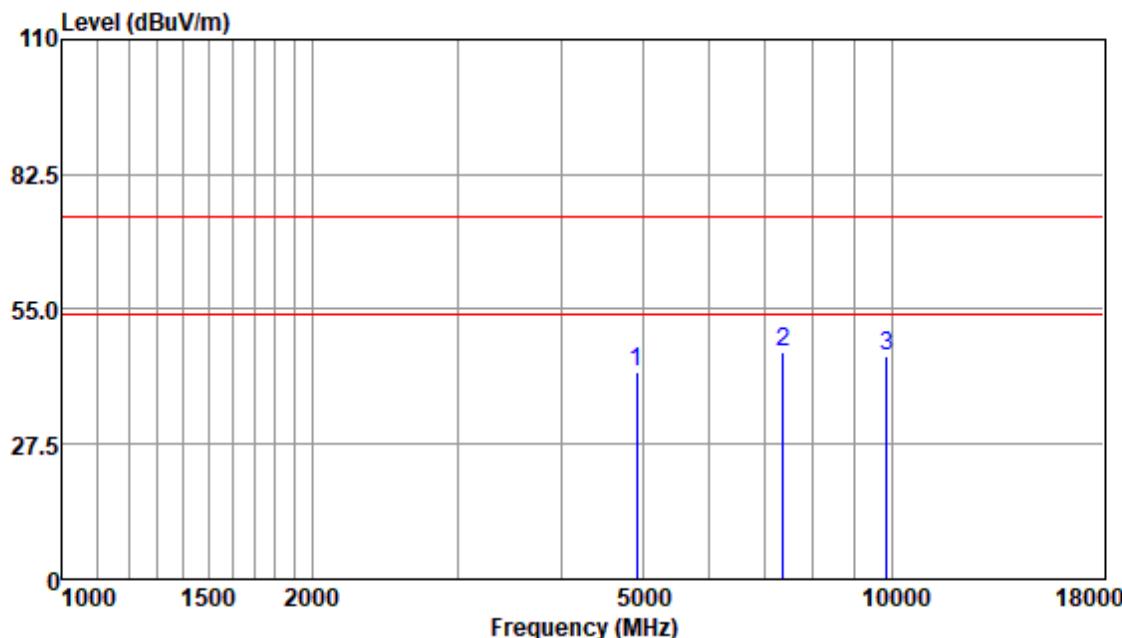


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4924.72	39.89	33.64	5.37	36.82	42.08	74.00	-31.92	Peak
7386.07	37.96	36.36	7.29	35.37	46.24	74.00	-27.76	Peak
9848.31	32.68	37.60	8.82	33.45	45.65	74.00	-28.35	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

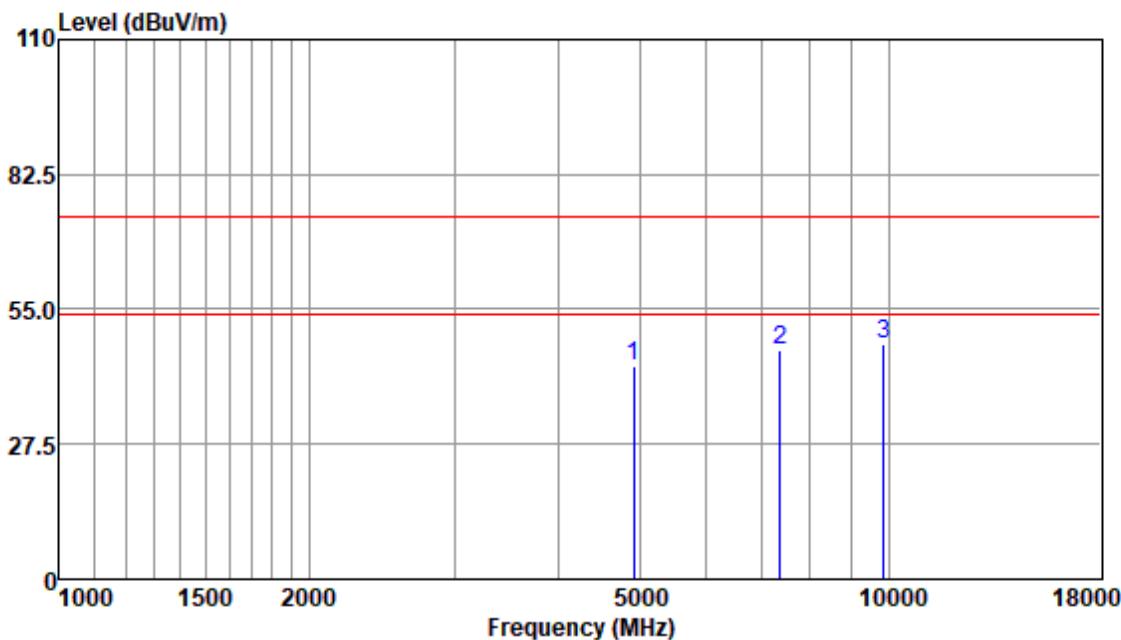


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4924.72	41.18	33.64	5.37	36.82	43.37	74.00	-30.63	Peak
7386.07	38.38	36.36	7.29	35.37	46.66	74.00	-27.34	Peak
9848.31	34.87	37.60	8.82	33.45	47.84	74.00	-26.16	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

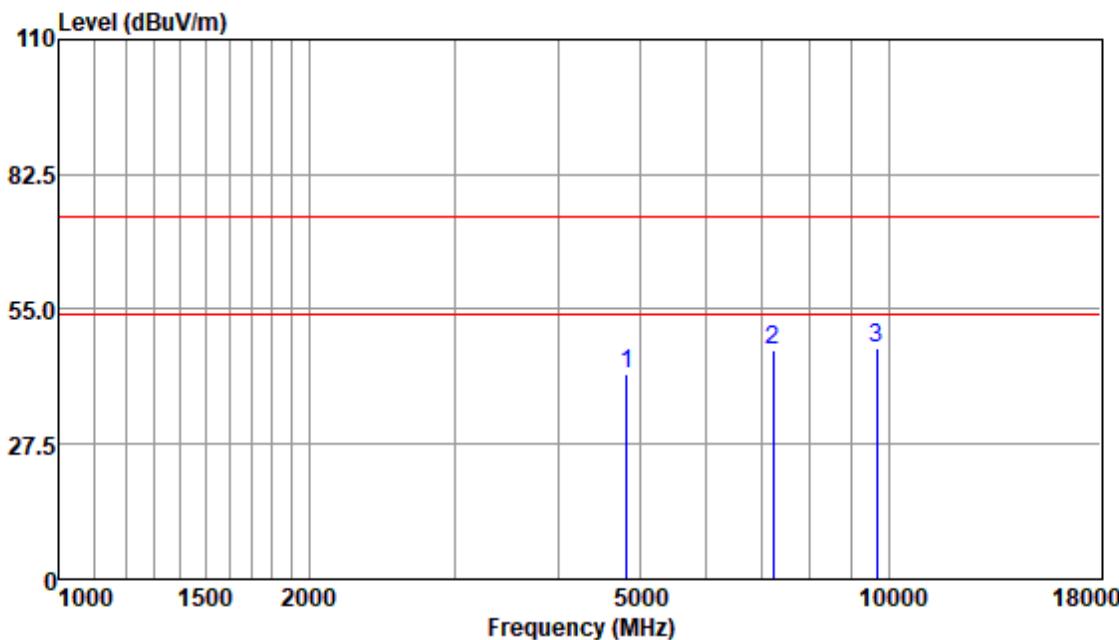


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4824.02	39.79	33.60	5.41	36.79	42.01	74.00	-31.99	Peak
7236.05	38.61	36.29	7.18	35.50	46.58	74.00	-27.42	Peak
9648.26	34.33	37.71	8.64	33.56	47.12	74.00	-26.88	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

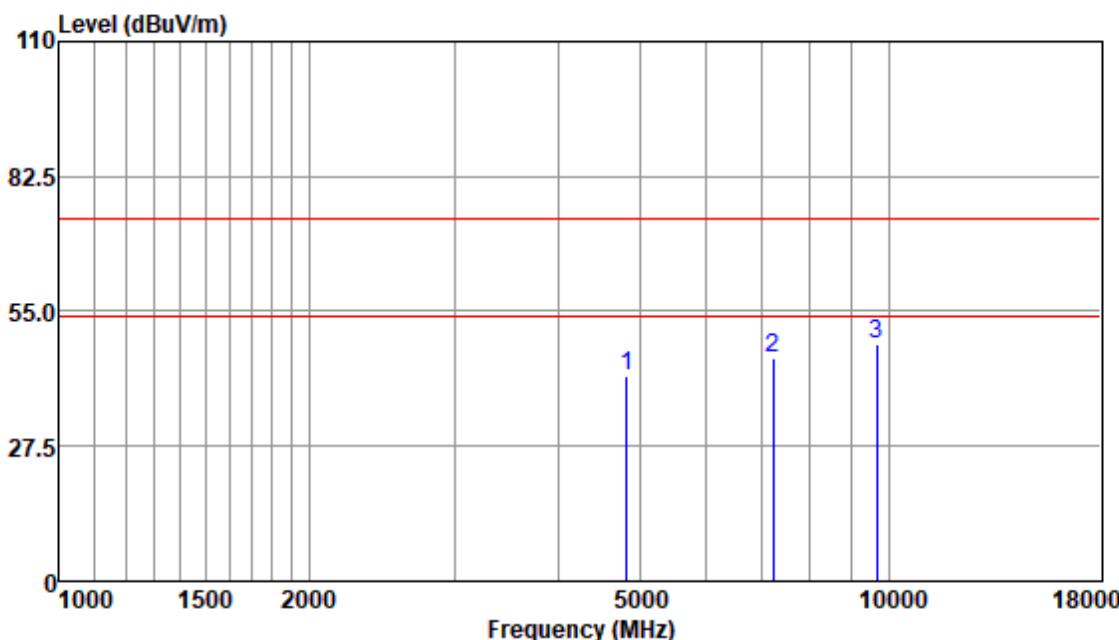


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4824.02	39.65	33.60	5.41	36.79	41.87	74.00	-32.13	Peak
7236.05	37.69	36.29	7.18	35.50	45.66	74.00	-28.34	Peak
9648.26	35.63	37.71	8.64	33.56	48.42	74.00	-25.58	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

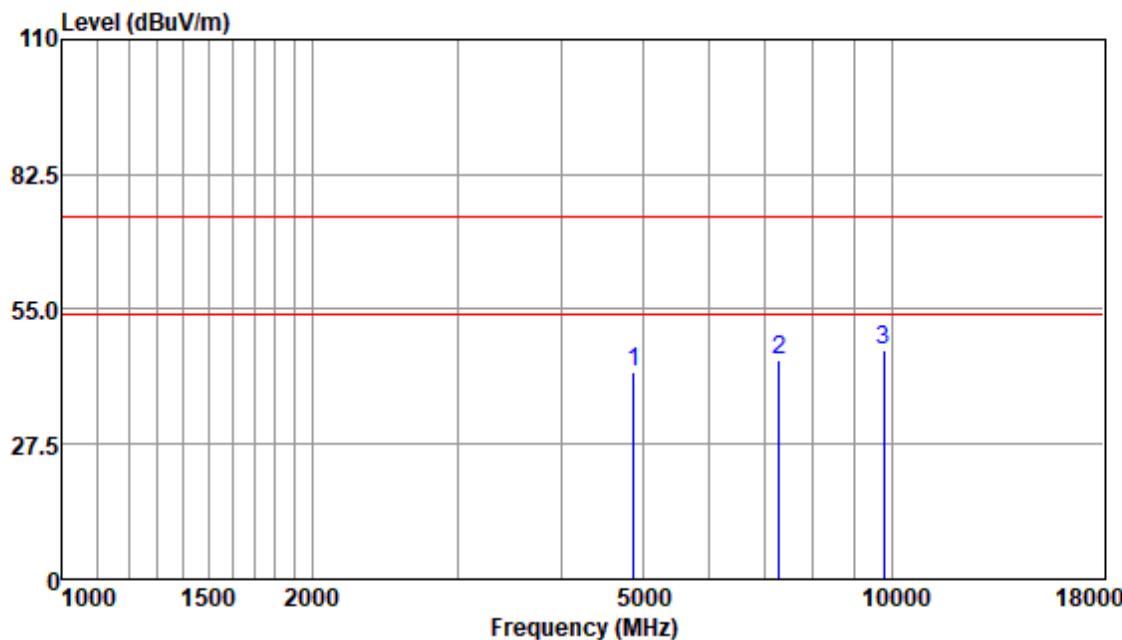


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	40.28	33.66	5.28	36.81	42.41	74.00	-31.59	Peak
7311.12	36.60	36.32	7.34	35.44	44.82	74.00	-29.18	Peak
9748.37	33.69	37.54	8.84	33.50	46.57	74.00	-27.43	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

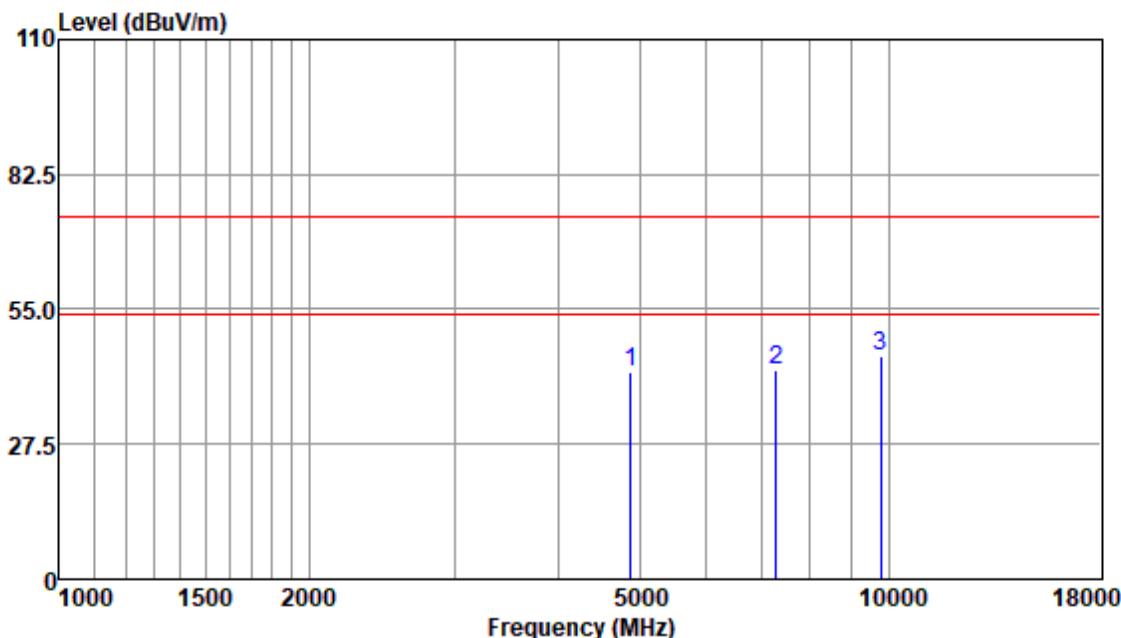


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	40.28	33.66	5.28	36.81	42.41	74.00	-31.59	Peak
7311.12	34.47	36.32	7.34	35.44	42.69	74.00	-31.31	Peak
9748.37	32.75	37.54	8.84	33.50	45.63	74.00	-28.37	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

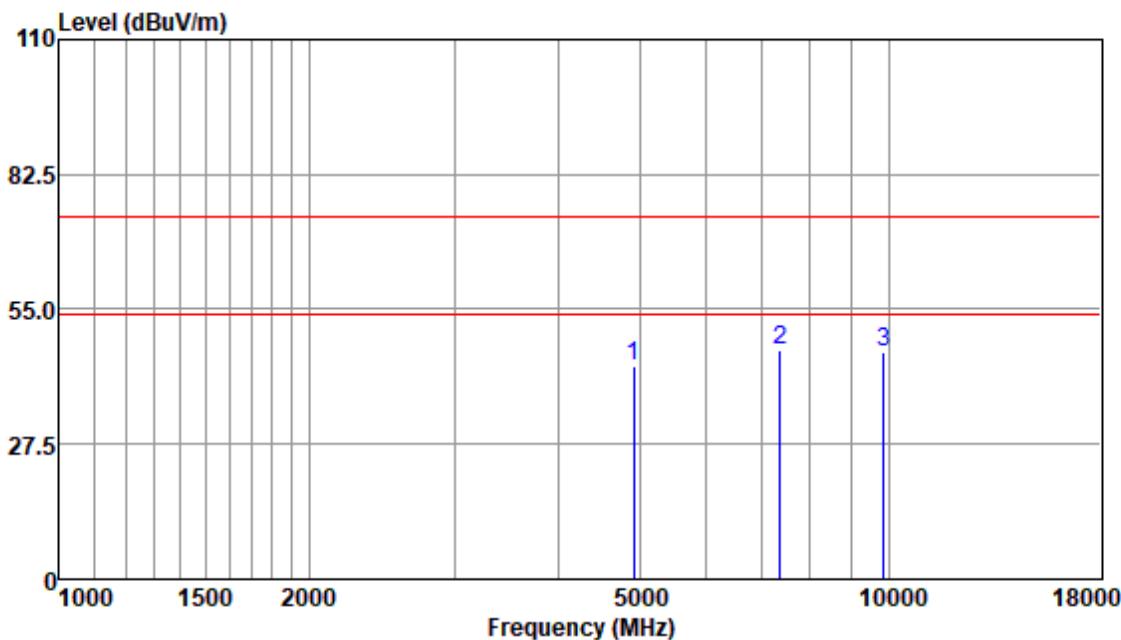


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4924.72	41.09	33.64	5.37	36.82	43.28	74.00	-30.72	Peak
7386.07	38.50	36.36	7.29	35.37	46.78	74.00	-27.22	Peak
9848.31	33.27	37.60	8.82	33.45	46.24	74.00	-27.76	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

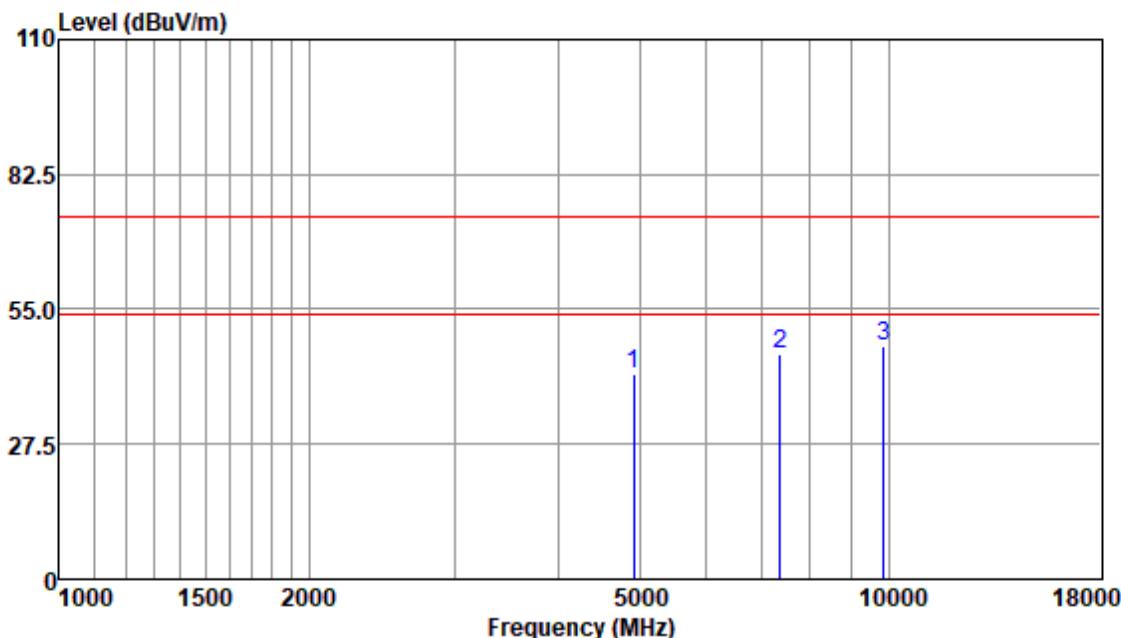


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4924.72	39.49	33.64	5.37	36.82	41.68	74.00	-32.32	Peak
7386.07	37.60	36.36	7.29	35.37	45.88	74.00	-28.12	Peak
9848.31	34.56	37.60	8.82	33.45	47.53	74.00	-26.47	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

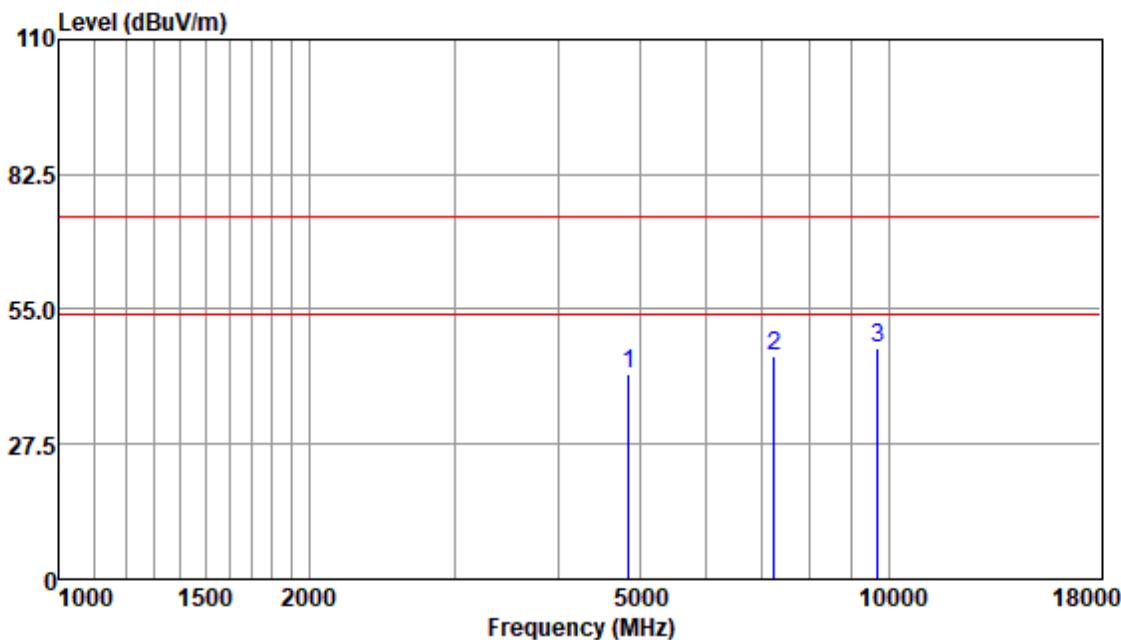


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4844.95	39.65	33.66	5.43	36.80	41.94	74.00	-32.06	Peak
7266.02	37.23	36.30	7.28	35.48	45.33	74.00	-28.67	Peak
9688.15	34.56	37.62	8.60	33.53	47.25	74.00	-26.75	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

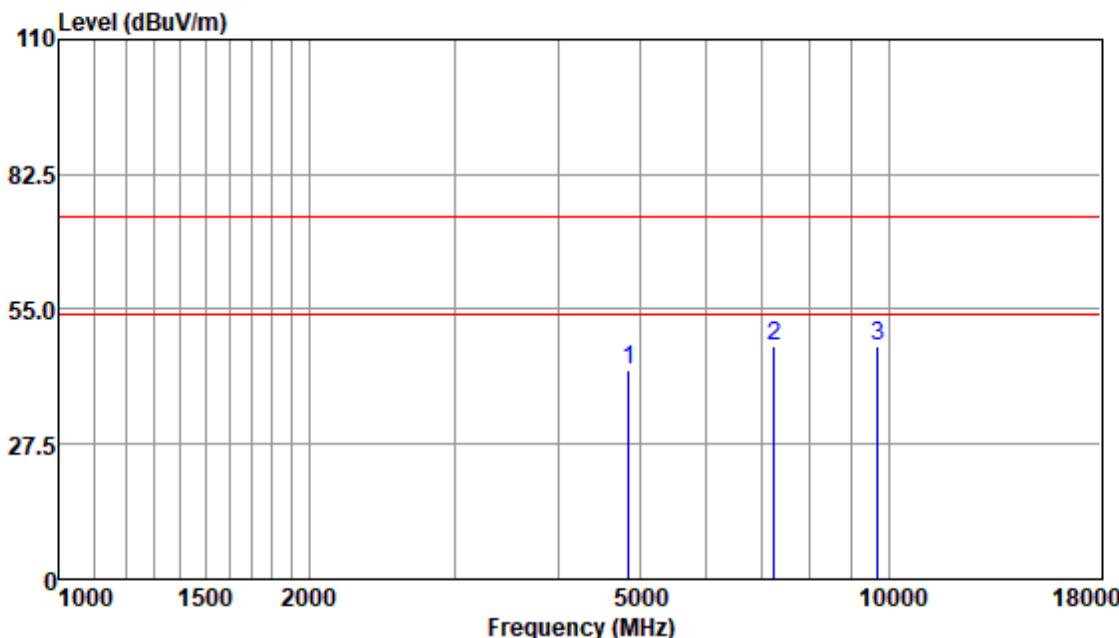


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4844.95	40.53	33.66	5.43	36.80	42.82	74.00	-31.18	Peak
7266.02	39.43	36.30	7.28	35.48	47.53	74.00	-26.47	Peak
9688.15	34.83	37.62	8.60	33.53	47.52	74.00	-26.48	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

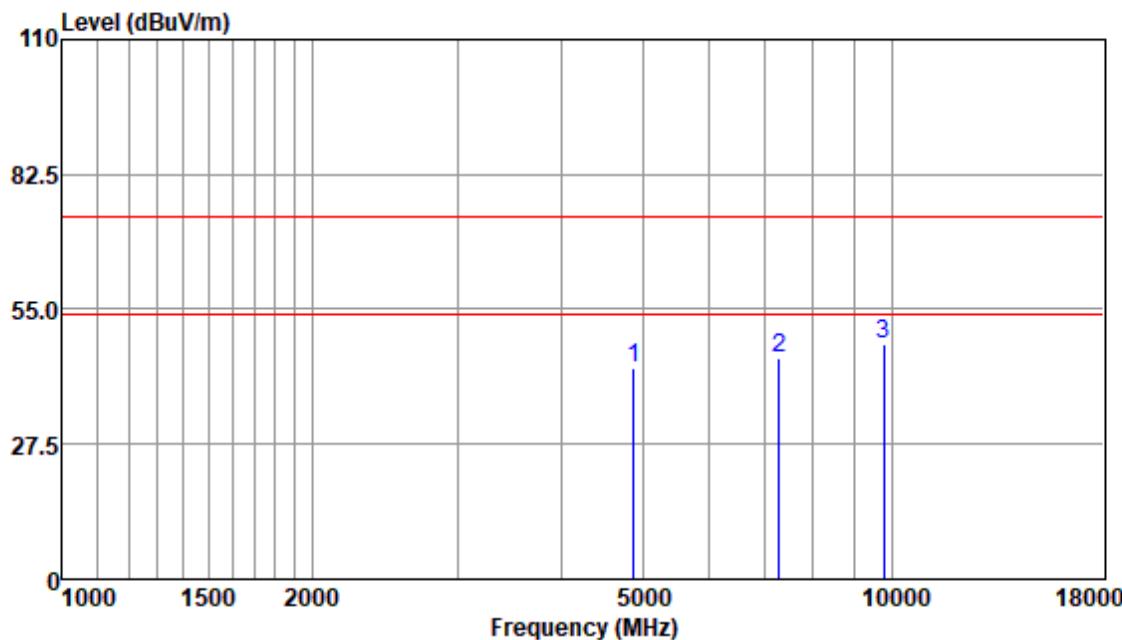


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	41.01	33.66	5.28	36.81	43.14	74.00	-30.86	Peak
7311.12	36.96	36.32	7.34	35.44	45.18	74.00	-28.82	Peak
9748.37	34.82	37.54	8.84	33.50	47.70	74.00	-26.30	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

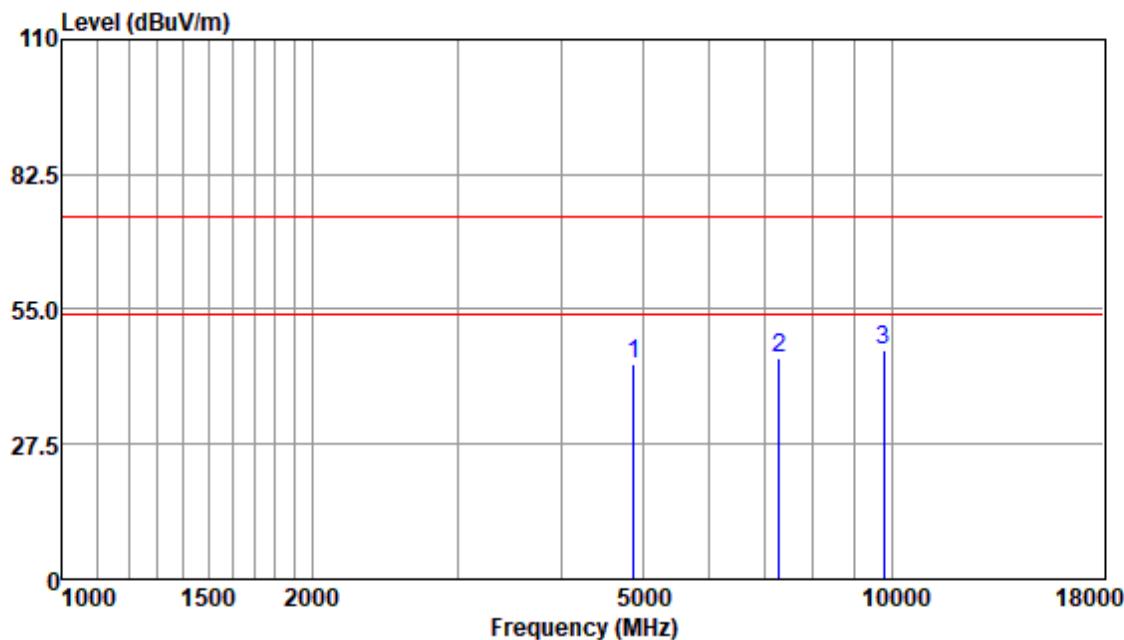


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Emission Limit	Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB		
4874.04	41.77	33.66	5.28	36.81	43.90	74.00	-30.10	Peak	
7311.12	36.90	36.32	7.34	35.44	45.12	74.00	-28.88	Peak	
9748.37	33.67	37.54	8.84	33.50	46.55	74.00	-27.45	Peak	

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

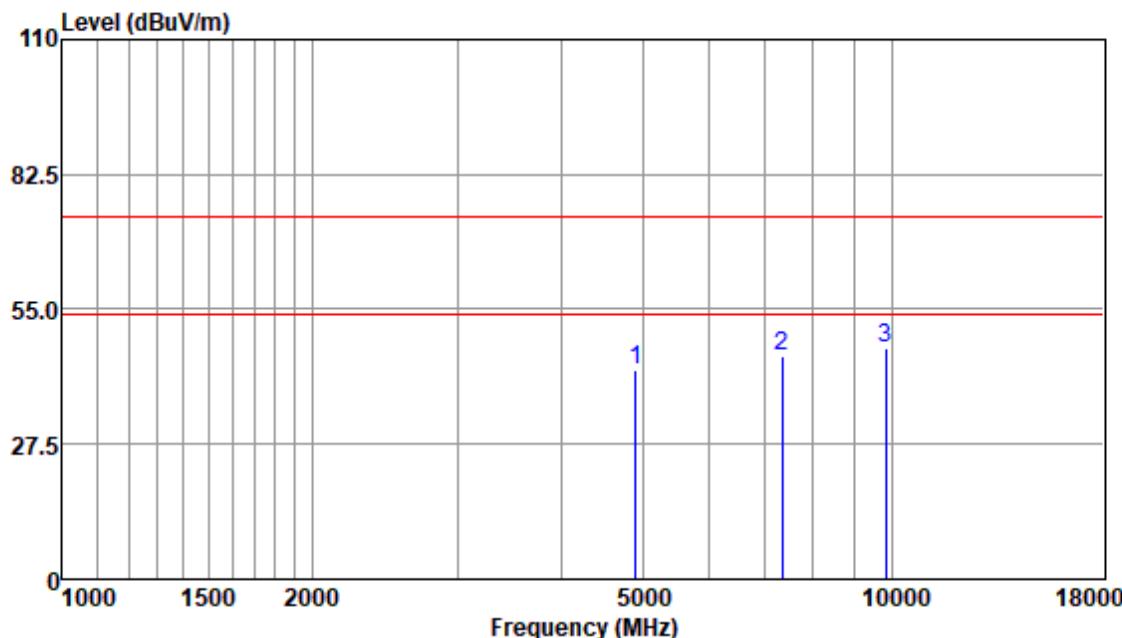


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4904.30	40.39	33.66	5.36	36.81	42.60	74.00	-31.40	Peak
7356.47	37.36	36.35	7.31	35.41	45.61	74.00	-28.39	Peak
9808.92	34.14	37.57	8.76	33.47	47.00	74.00	-27.00	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

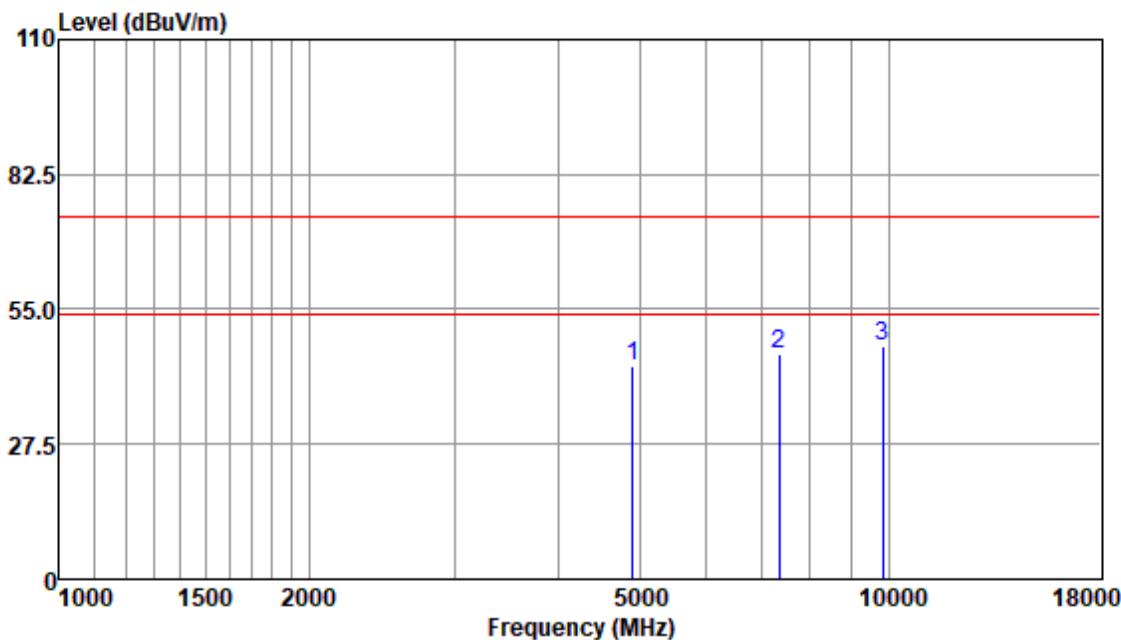


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4904.30	41.09	33.66	5.36	36.81	43.30	74.00	-30.70	Peak
7356.47	37.62	36.35	7.31	35.41	45.87	74.00	-28.13	Peak
9808.92	34.64	37.57	8.76	33.47	47.50	74.00	-26.50	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

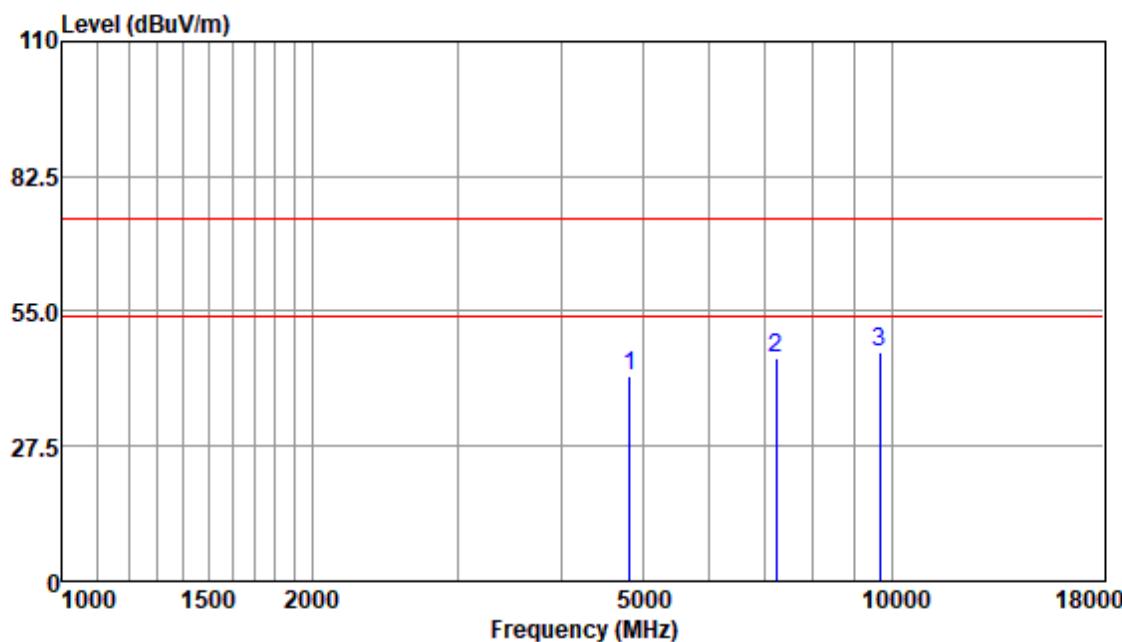


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4824.02	39.43	33.60	5.41	36.79	41.65	74.00	-32.35	Peak
7236.05	37.30	36.29	7.18	35.50	45.27	74.00	-28.73	Peak
9648.26	34.02	37.71	8.64	33.56	46.81	74.00	-27.19	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

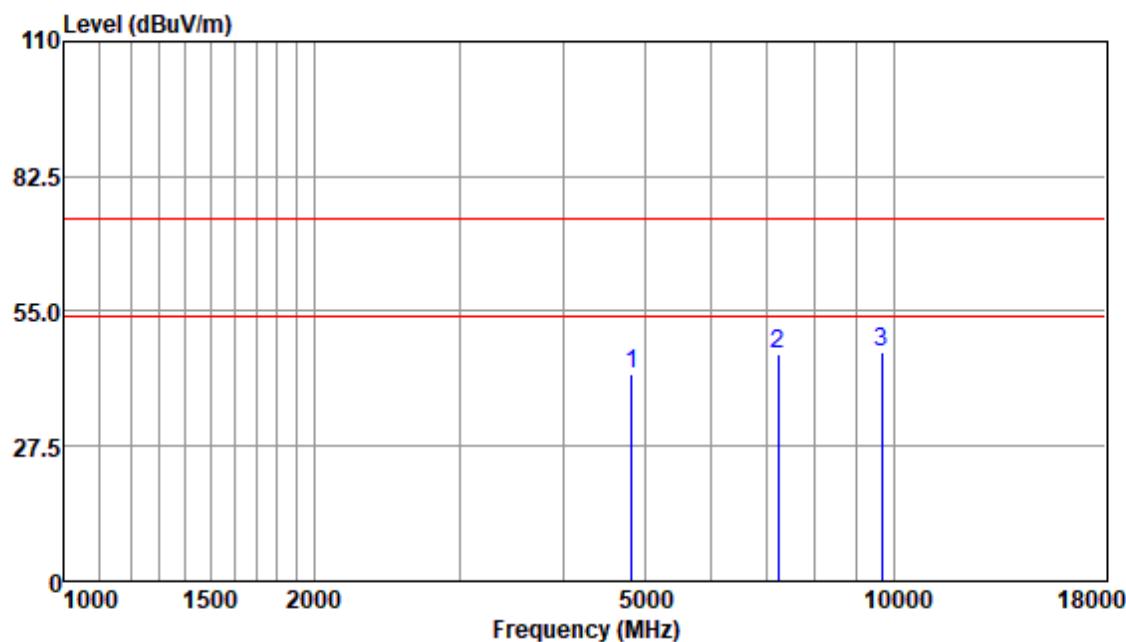


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4824.02	39.83	33.60	5.41	36.79	42.05	74.00	-31.95	Peak
7236.05	38.34	36.29	7.18	35.50	46.31	74.00	-27.69	Peak
9648.26	33.74	37.71	8.64	33.56	46.53	74.00	-27.47	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

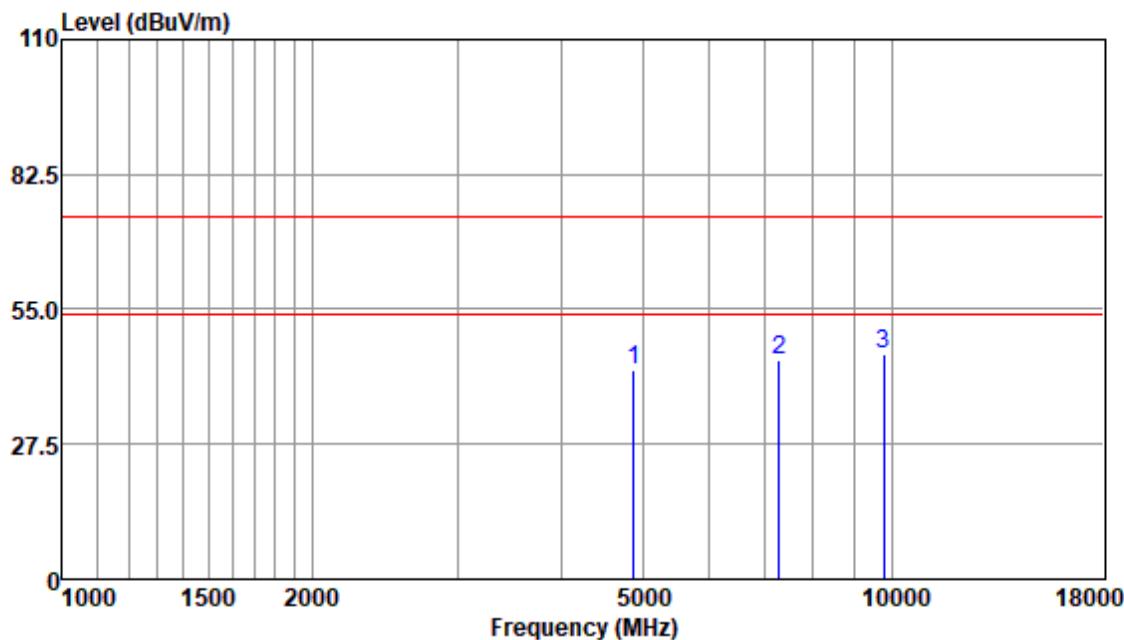


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	40.66	33.66	5.28	36.81	42.79	74.00	-31.21	Peak
7311.12	36.53	36.32	7.34	35.44	44.75	74.00	-29.25	Peak
9748.37	33.06	37.54	8.84	33.50	45.94	74.00	-28.06	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

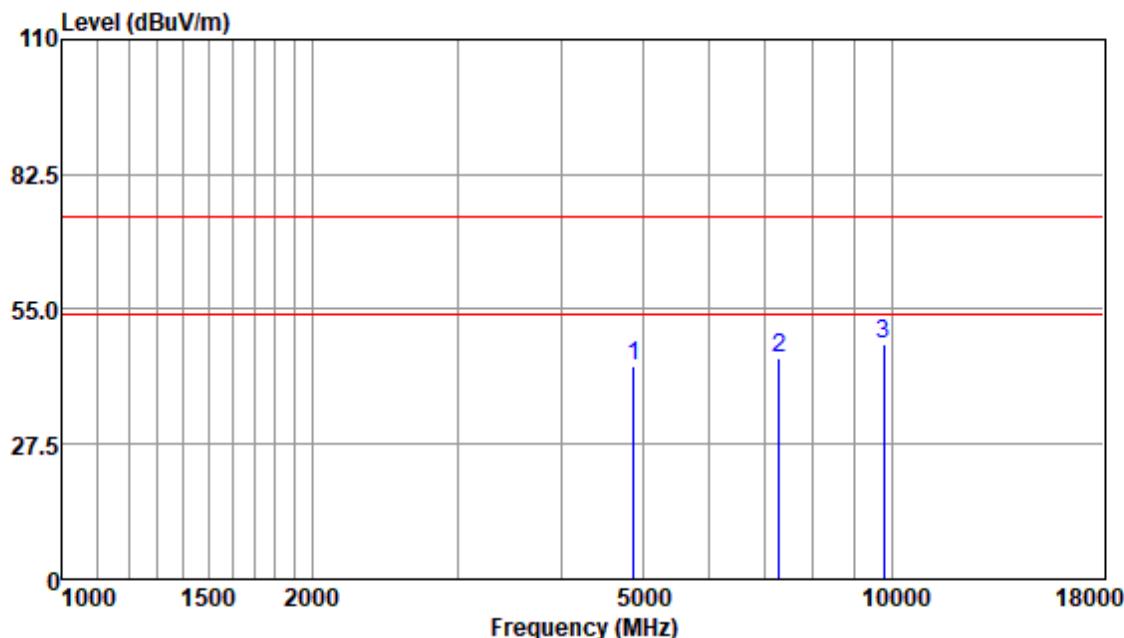


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	41.32	33.66	5.28	36.81	43.45	74.00	-30.55	Peak
7311.12	36.77	36.32	7.34	35.44	44.99	74.00	-29.01	Peak
9748.37	34.85	37.54	8.84	33.50	47.73	74.00	-26.27	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

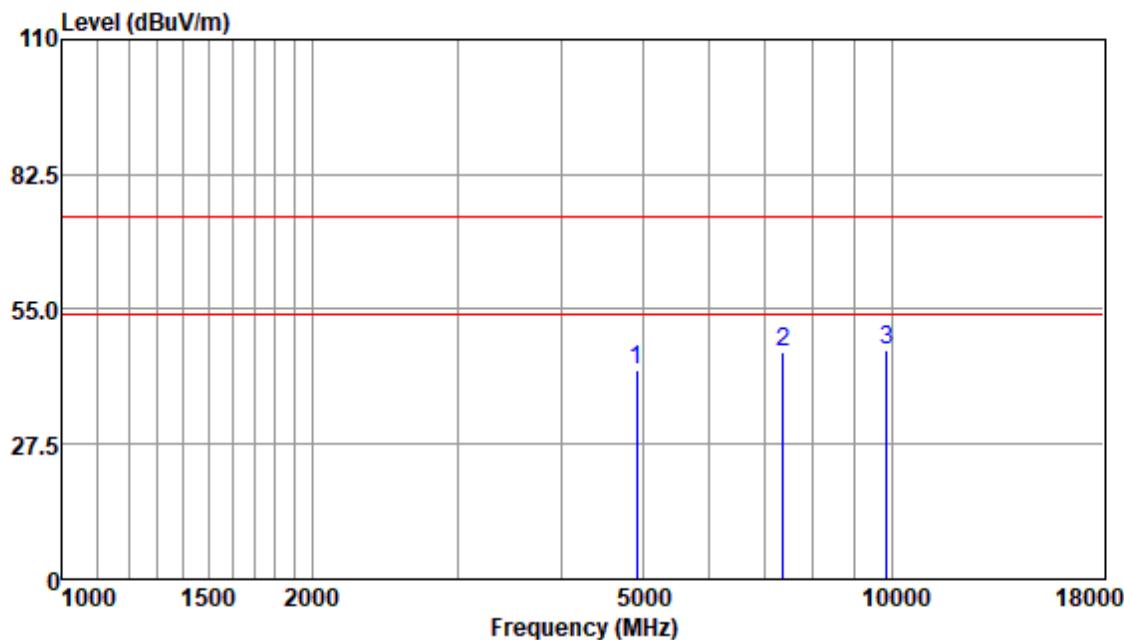


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4924.72	40.28	33.64	5.37	36.82	42.47	74.00	-31.53	Peak
7386.07	38.03	36.36	7.29	35.37	46.31	74.00	-27.69	Peak
9848.31	33.84	37.60	8.82	33.45	46.81	74.00	-27.19	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

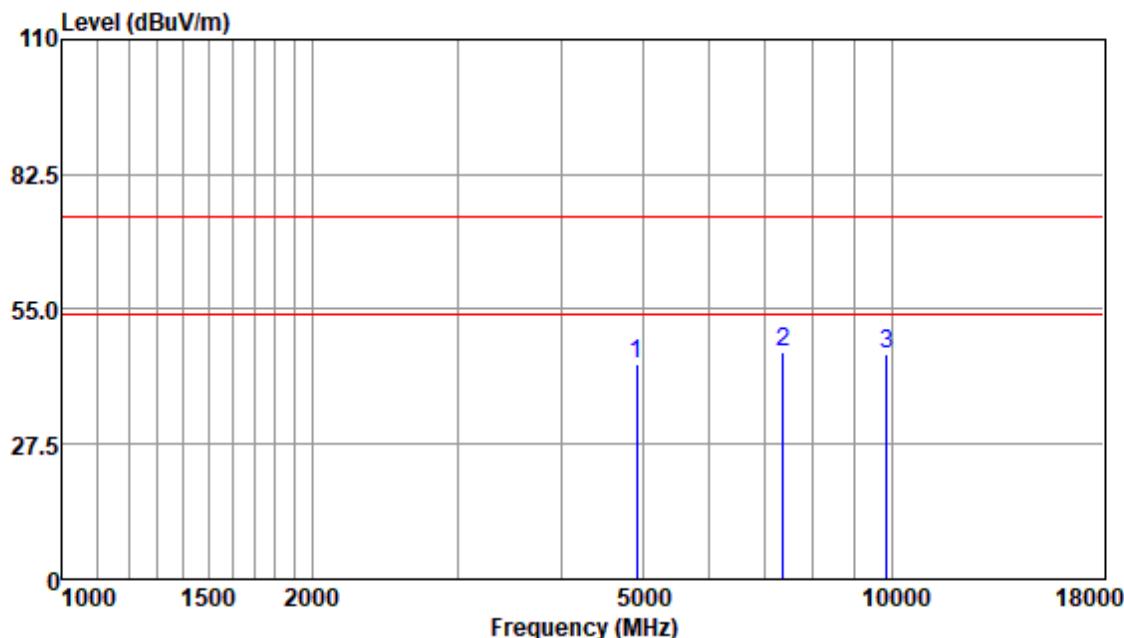


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4924.72	41.77	33.64	5.37	36.82	43.96	74.00	-30.04	Peak
7386.07	38.09	36.36	7.29	35.37	46.37	74.00	-27.63	Peak
9848.31	32.82	37.60	8.82	33.45	45.79	74.00	-28.21	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

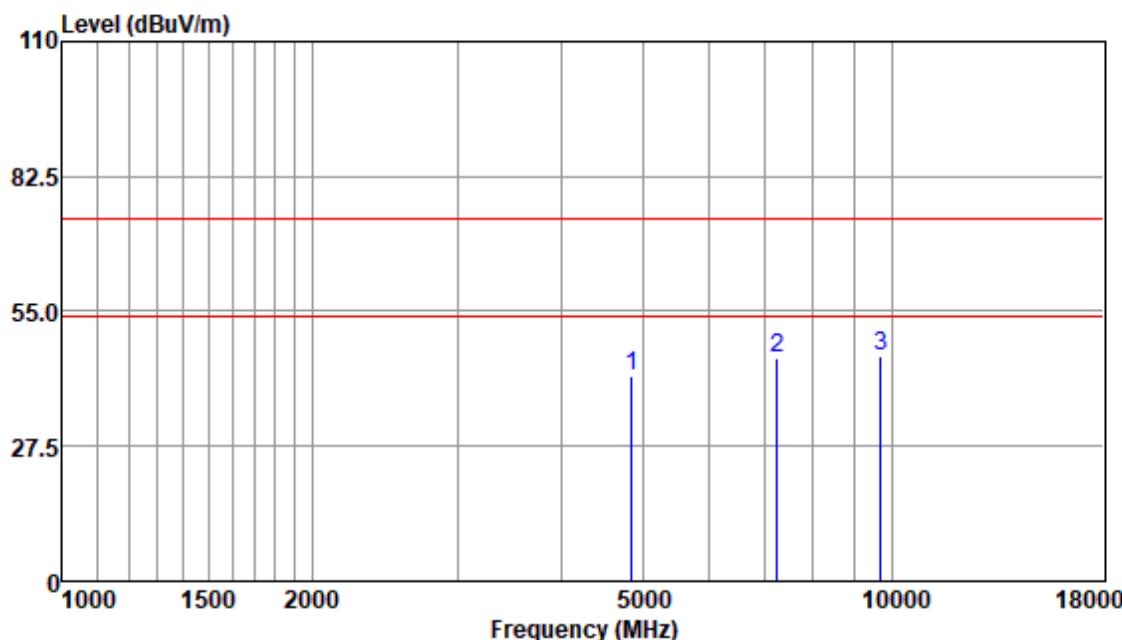


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4844.95	39.35	33.66	5.43	36.80	41.64	74.00	-32.36	Peak
7266.02	37.33	36.30	7.28	35.48	45.43	74.00	-28.57	Peak
9688.15	33.17	37.62	8.60	33.53	45.86	74.00	-28.14	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

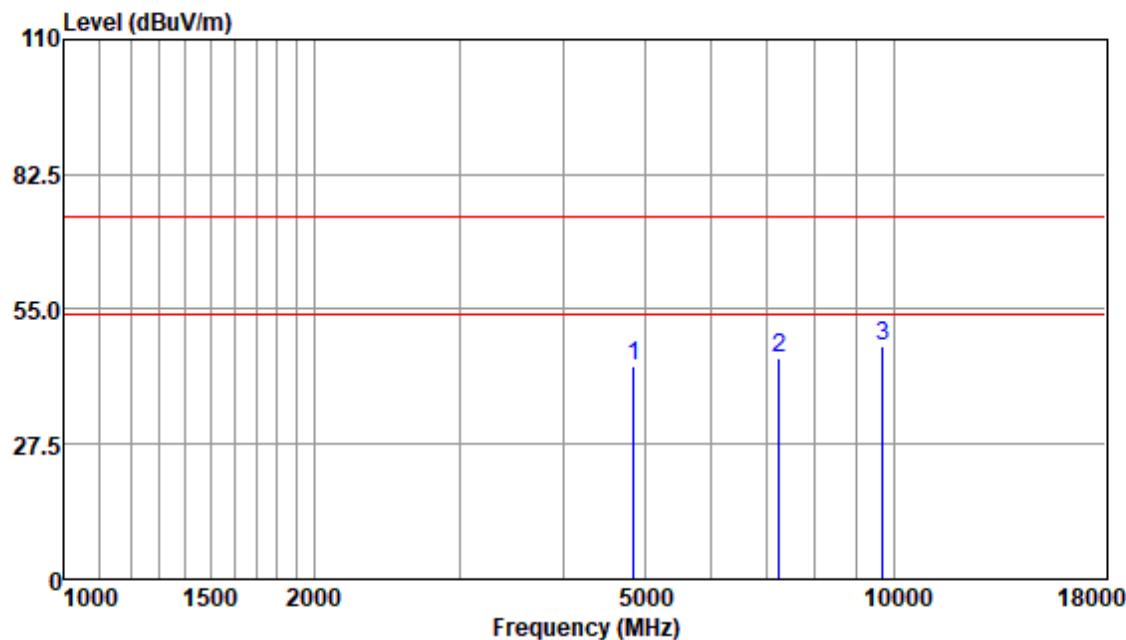


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4844.95	40.95	33.66	5.43	36.80	43.24	74.00	-30.76	Peak
7266.02	37.11	36.30	7.28	35.48	45.21	74.00	-28.79	Peak
9688.15	34.89	37.62	8.60	33.53	47.58	74.00	-26.42	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

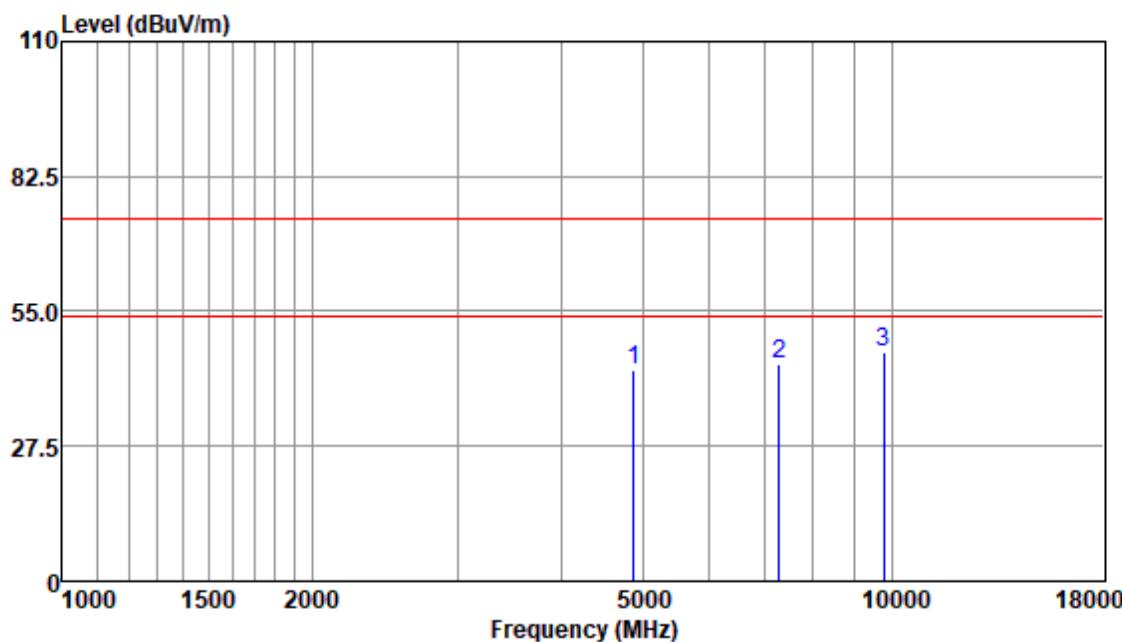


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	40.74	33.66	5.28	36.81	42.87	74.00	-31.13	Peak
7311.12	35.87	36.32	7.34	35.44	44.09	74.00	-29.91	Peak
9748.37	33.87	37.54	8.84	33.50	46.75	74.00	-27.25	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

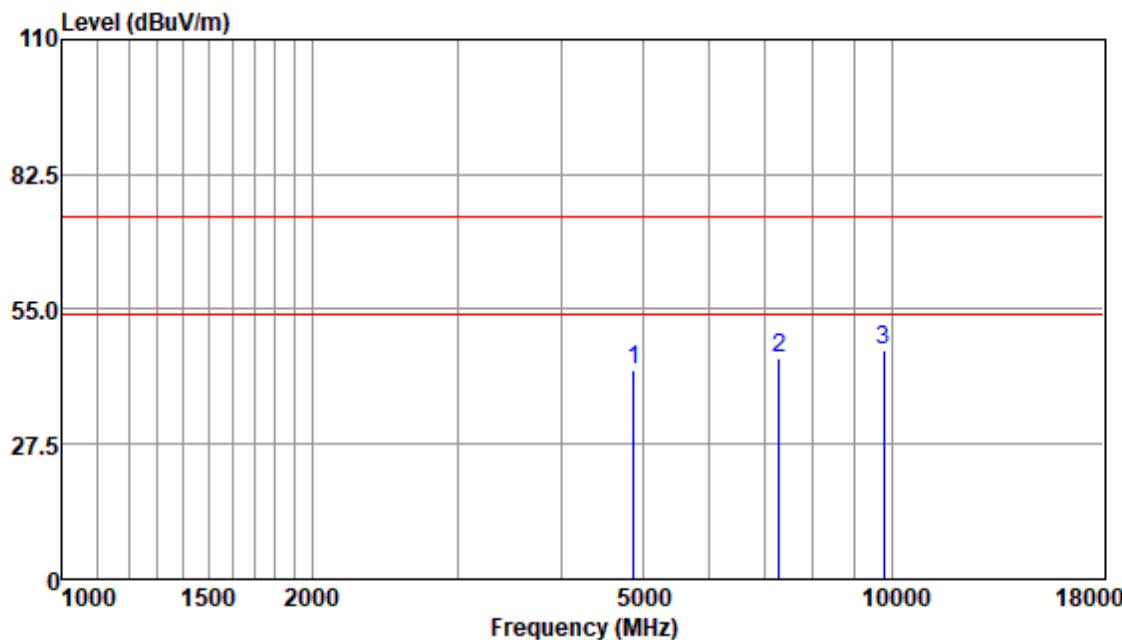


Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.04	40.58	33.66	5.28	36.81	42.71	74.00	-31.29	Peak
7311.12	36.99	36.32	7.34	35.44	45.21	74.00	-28.79	Peak
9748.37	33.97	37.54	8.84	33.50	46.85	74.00	-27.15	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

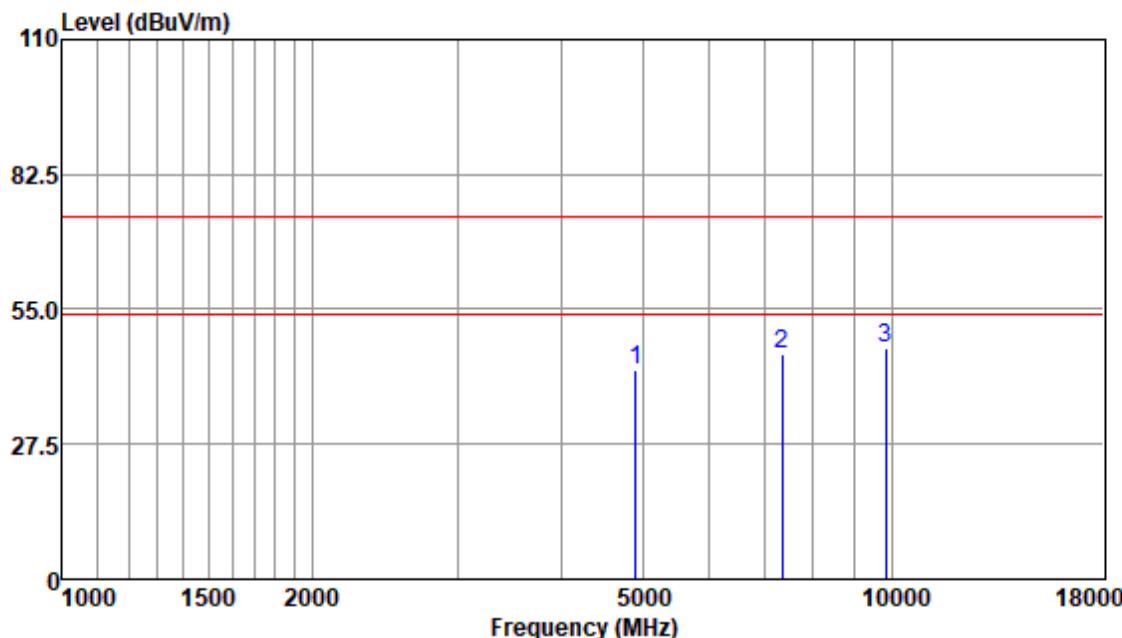


Antenna Polarity :HORIZONTAL

EUT/Project :1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Emission Limit	Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB		
4904.30	40.31	33.66	5.36	36.81	42.52	74.00	-31.48	Peak	
7356.47	37.44	36.35	7.31	35.41	45.69	74.00	-28.31	Peak	
9808.92	34.39	37.57	8.76	33.47	47.25	74.00	-26.75	Peak	

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

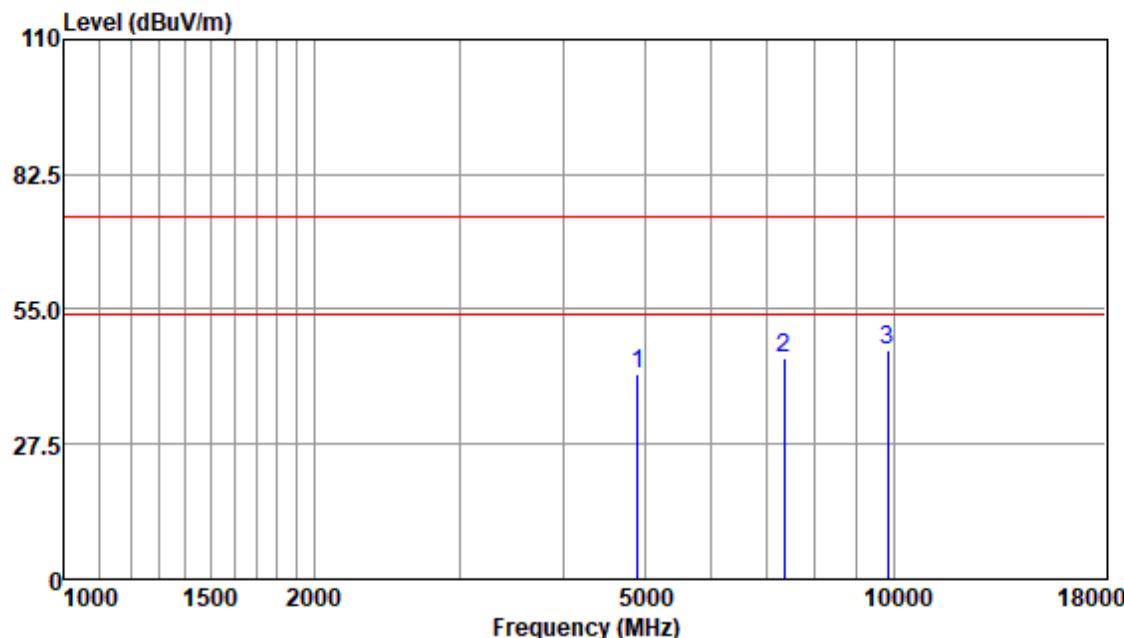

Antenna Polarity : VERTICAL

EUT/Project : 1328AT

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4904.30	39.48	33.66	5.36	36.81	41.69	74.00	-32.31	Peak
7356.47	36.77	36.35	7.31	35.41	45.02	74.00	-28.98	Peak
9808.92	33.89	37.57	8.76	33.47	46.75	74.00	-27.25	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

## 7.5 Conducted Average Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 24.9 °C      Humidity: 54.6 % RH      Atmospheric Pressure: 1010 mbar

### 7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)/ax(HEW20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40)/ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

### 7.5.3 Test Setup Diagram

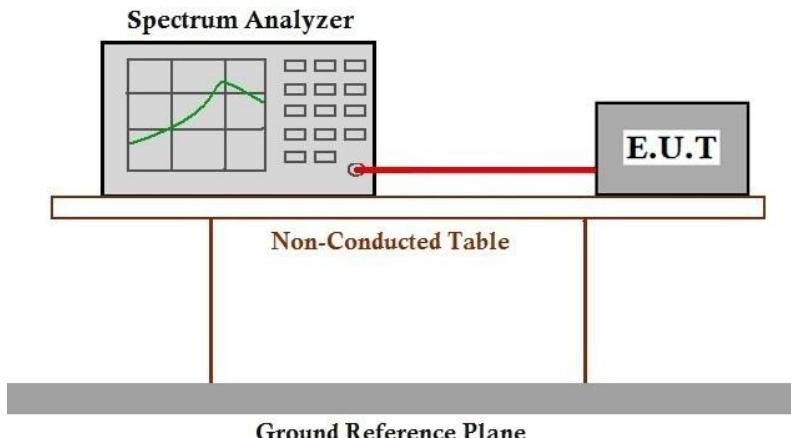

### 7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

## 7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)  
Test Method: ANSI C63.10 (2013) Section 11.8.1  
Limit:  $\geq 500$  kHz

### 7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 24.9 °C      Humidity: 54.6 % RH      Atmospheric Pressure: 1010 mbar

### 7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)/ax(HEW20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40)/ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

### 7.6.3 Test Setup Diagram

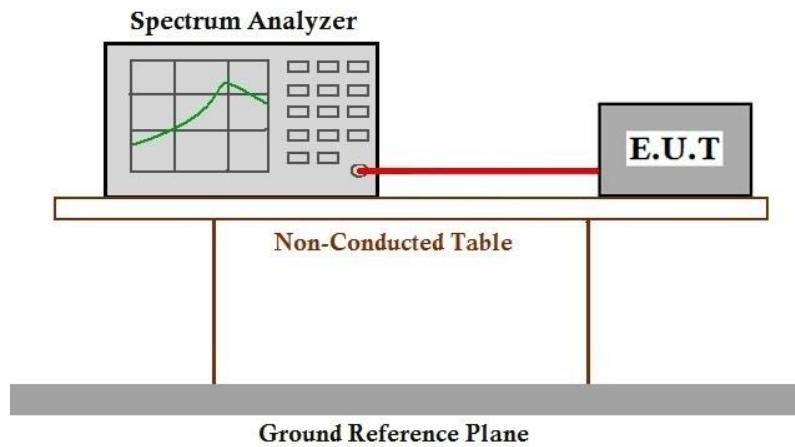

### 7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

### 7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 24.9 °C      Humidity: 54.6 % RH      Atmospheric Pressure: 1010 mbar

### 7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)/ax(HEW20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40)/ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

### 7.7.3 Test Setup Diagram

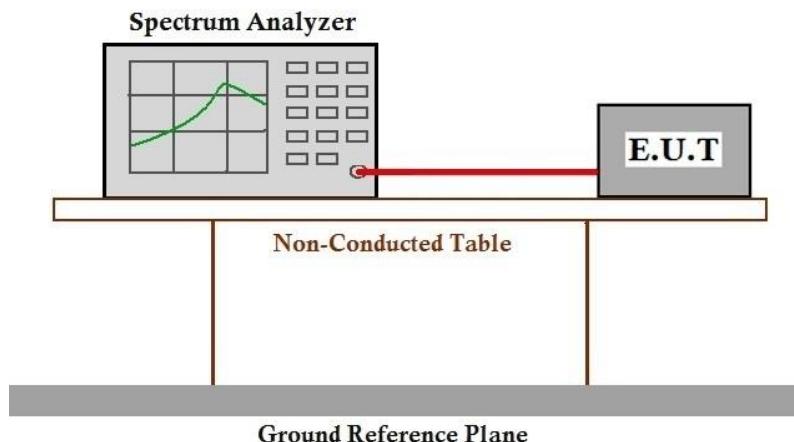

### 7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 24.8 °C      Humidity: 54.6 % RH      Atmospheric Pressure: 1010 mbar

### 7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)/ax(HEW20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40)/ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

### 7.8.3 Test Setup Diagram

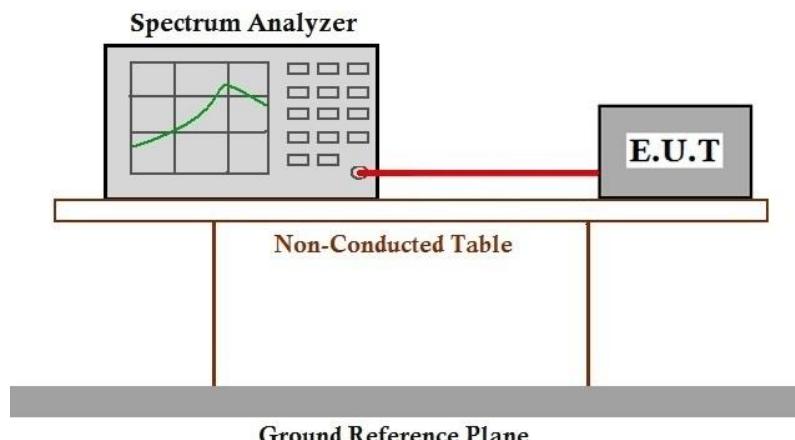

### 7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 24.8 °C      Humidity: 54.7 % RH      Atmospheric Pressure: 1010 mbar

### 7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)/ax(HEW20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40)/ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

### 7.9.3 Test Setup Diagram

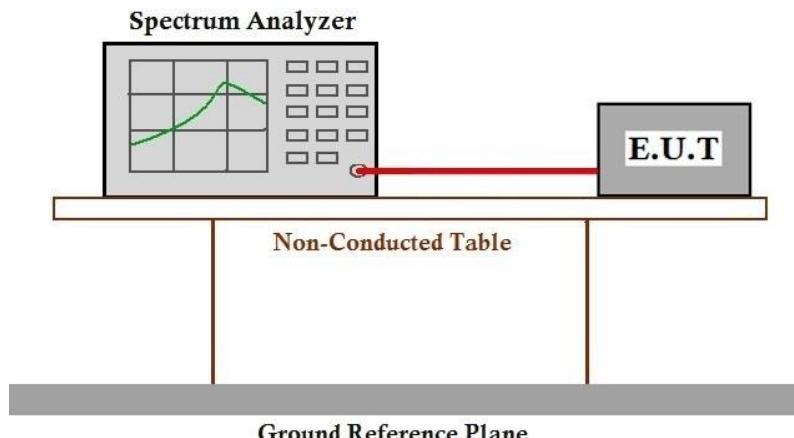

### 7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SHCR2407001328AT

## 9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for SHCR2407001328AT



## 10 Appendix

### 10.1 Appendix A: DTS Bandwidth

#### 10.1.1 Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.560	2407.440	2417.000	$\geq 0.5$	PASS
		2437	8.600	2432.920	2441.520	$\geq 0.5$	PASS
		2462	8.480	2457.520	2466.000	$\geq 0.5$	PASS
11G	Ant1	2412	16.320	2403.840	2420.160	$\geq 0.5$	PASS
		2437	16.400	2428.760	2445.160	$\geq 0.5$	PASS
		2462	16.120	2453.800	2469.920	$\geq 0.5$	PASS
11N20SISO	Ant1	2412	15.680	2404.440	2420.120	$\geq 0.5$	PASS
		2437	16.200	2428.560	2444.760	$\geq 0.5$	PASS
		2462	15.440	2454.080	2469.520	$\geq 0.5$	PASS
11N40SISO	Ant1	2422	29.040	2405.680	2434.720	$\geq 0.5$	PASS
		2437	35.040	2419.480	2454.520	$\geq 0.5$	PASS
		2452	33.680	2435.760	2469.440	$\geq 0.5$	PASS
11AX20SISO	Ant1	2412	14.800	2405.720	2420.520	$\geq 0.5$	PASS
		2437	14.960	2428.720	2443.680	$\geq 0.5$	PASS
		2462	16.840	2452.880	2469.720	$\geq 0.5$	PASS
11AX40SISO	Ant1	2422	31.280	2405.760	2437.040	$\geq 0.5$	PASS
		2437	35.760	2418.760	2454.520	$\geq 0.5$	PASS
		2452	30.000	2435.760	2465.760	$\geq 0.5$	PASS

### 10.1.2 Test Graphs

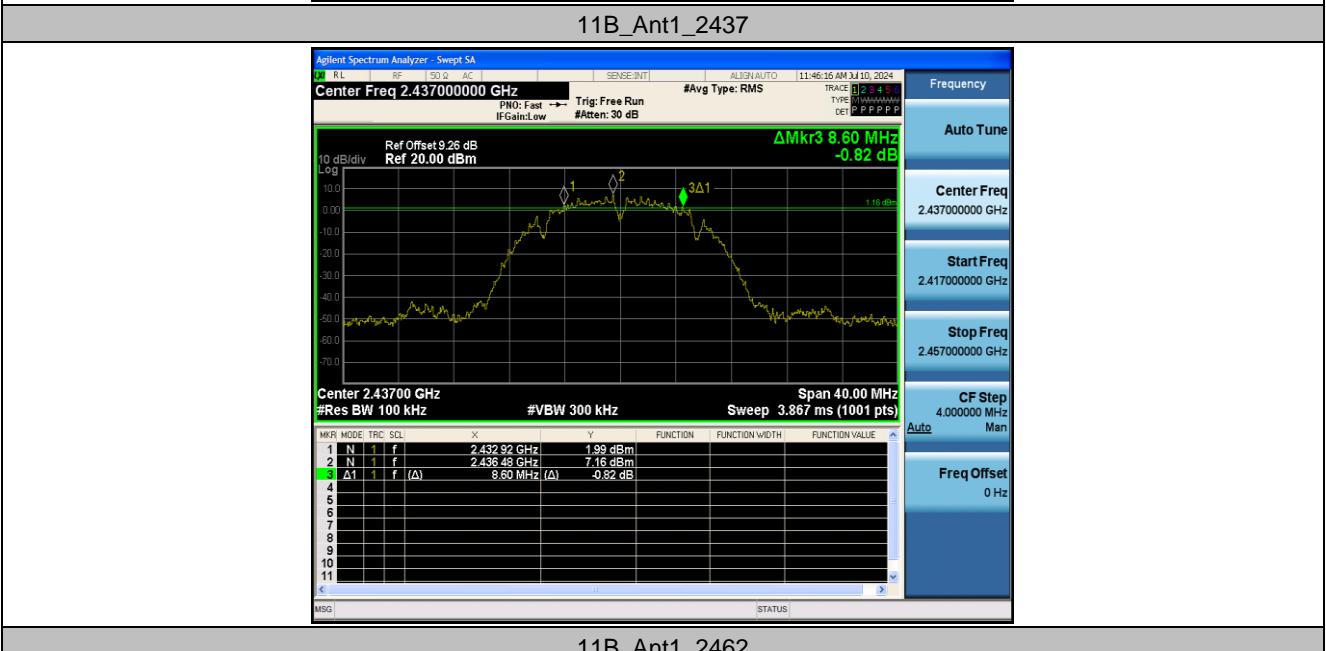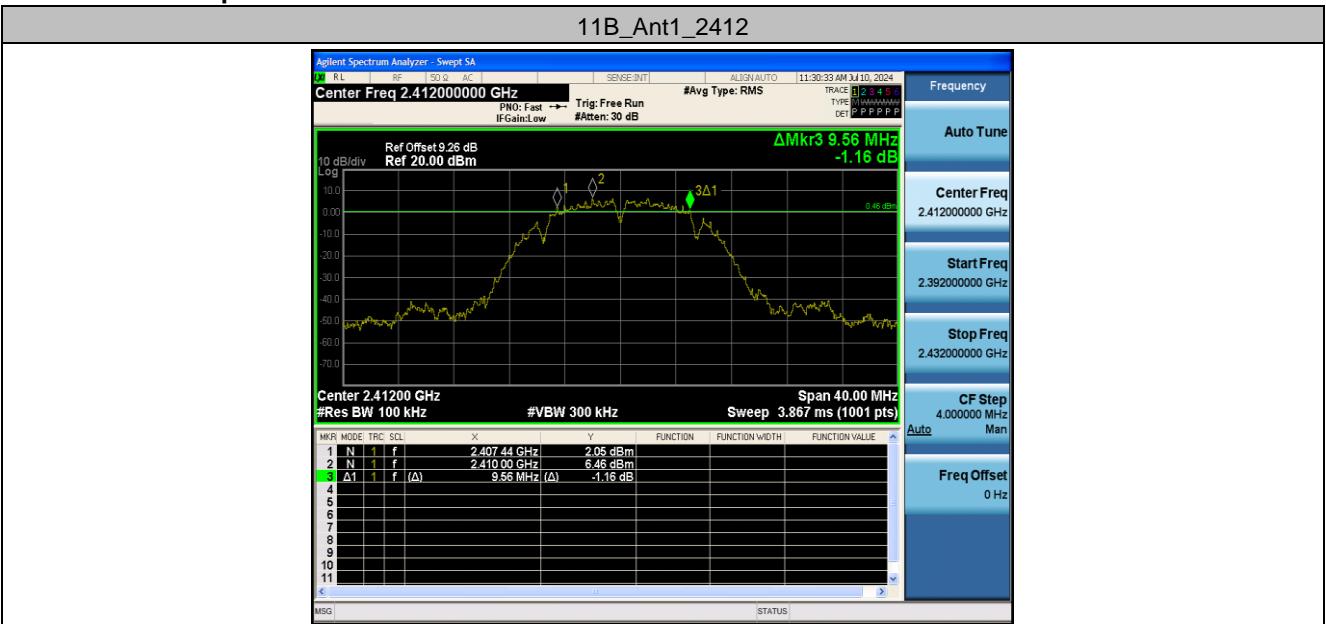




11G\_Ant1\_2412




11G\_Ant1\_2437






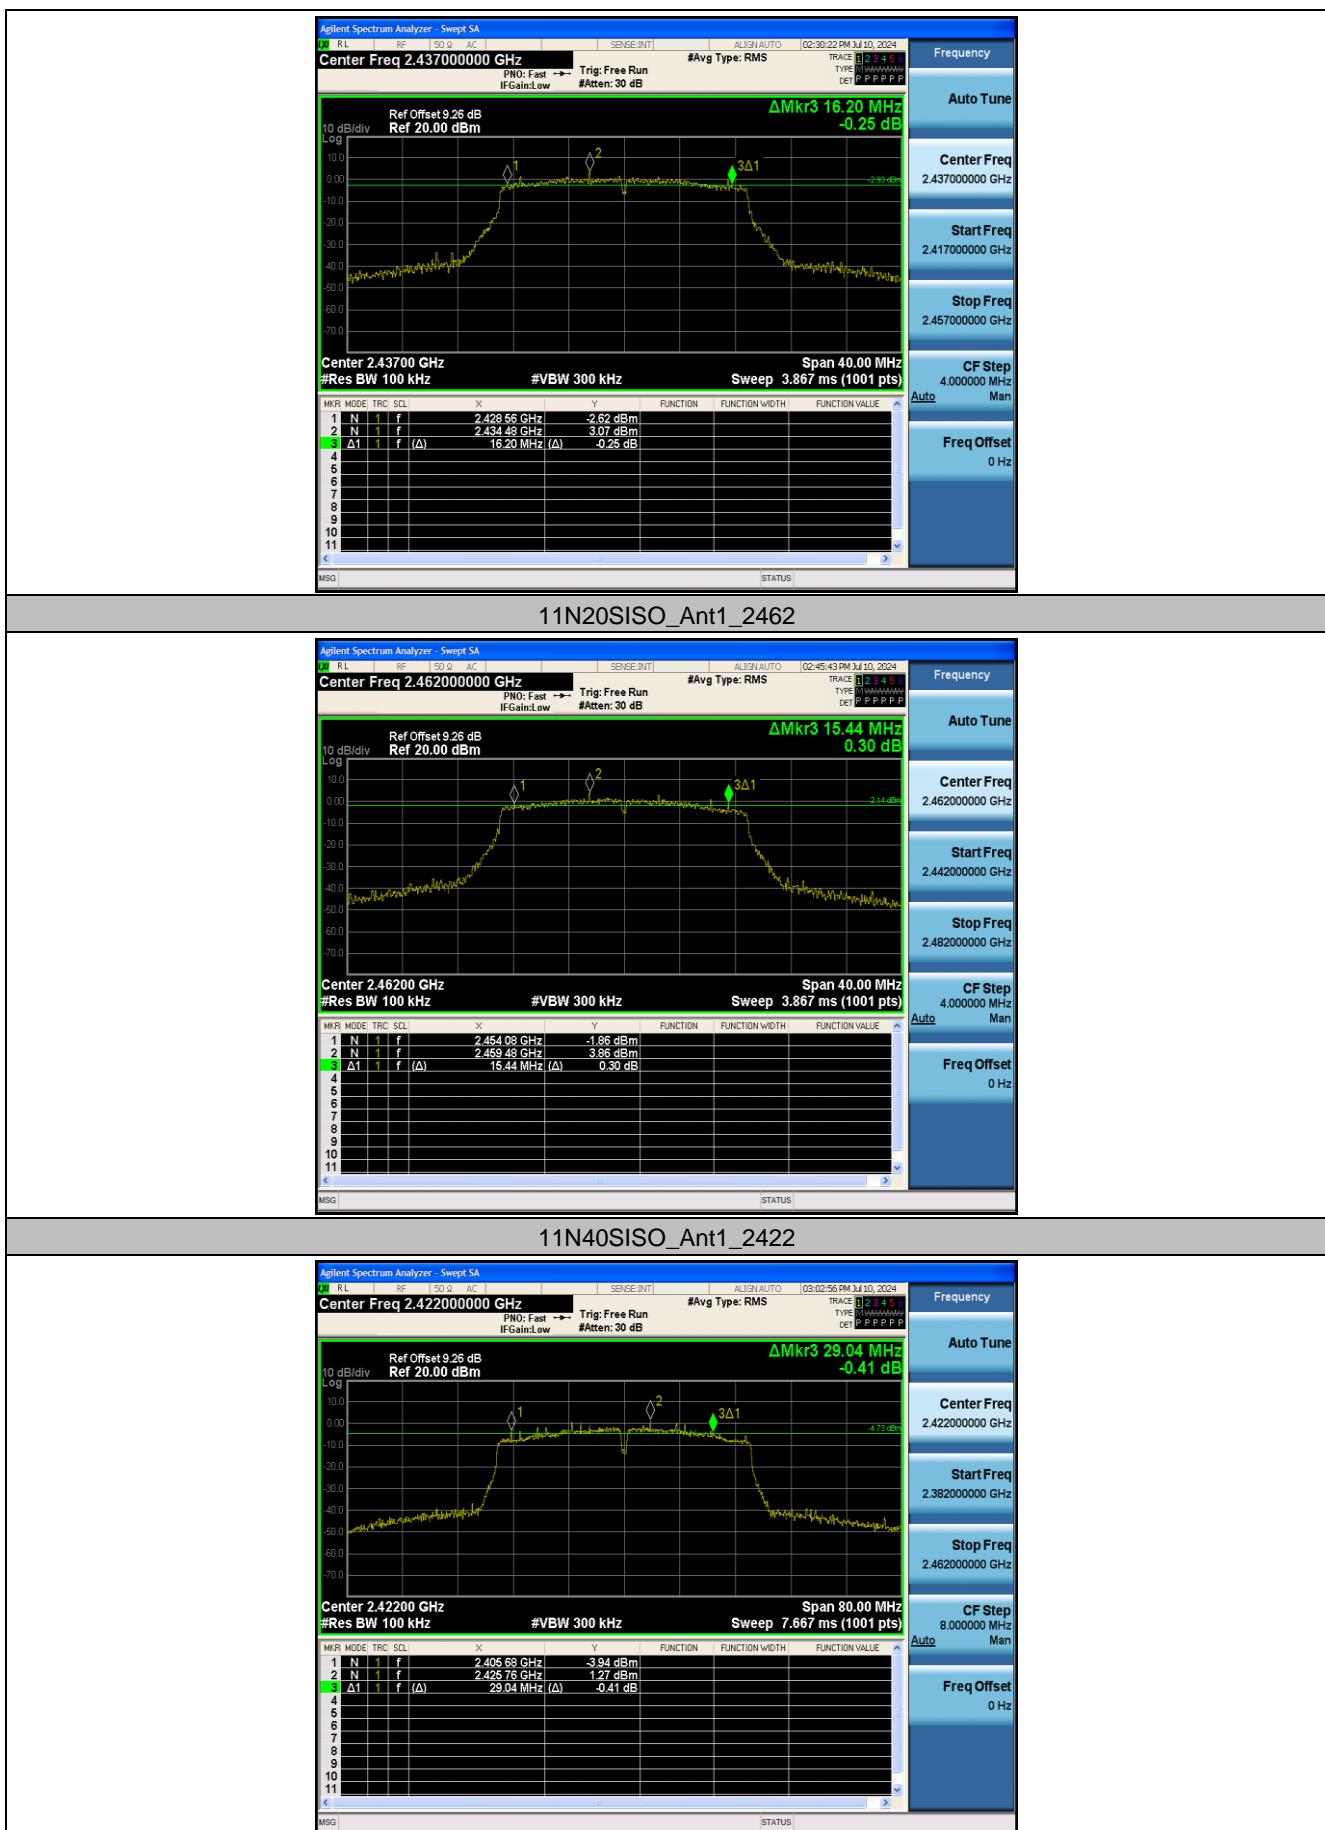

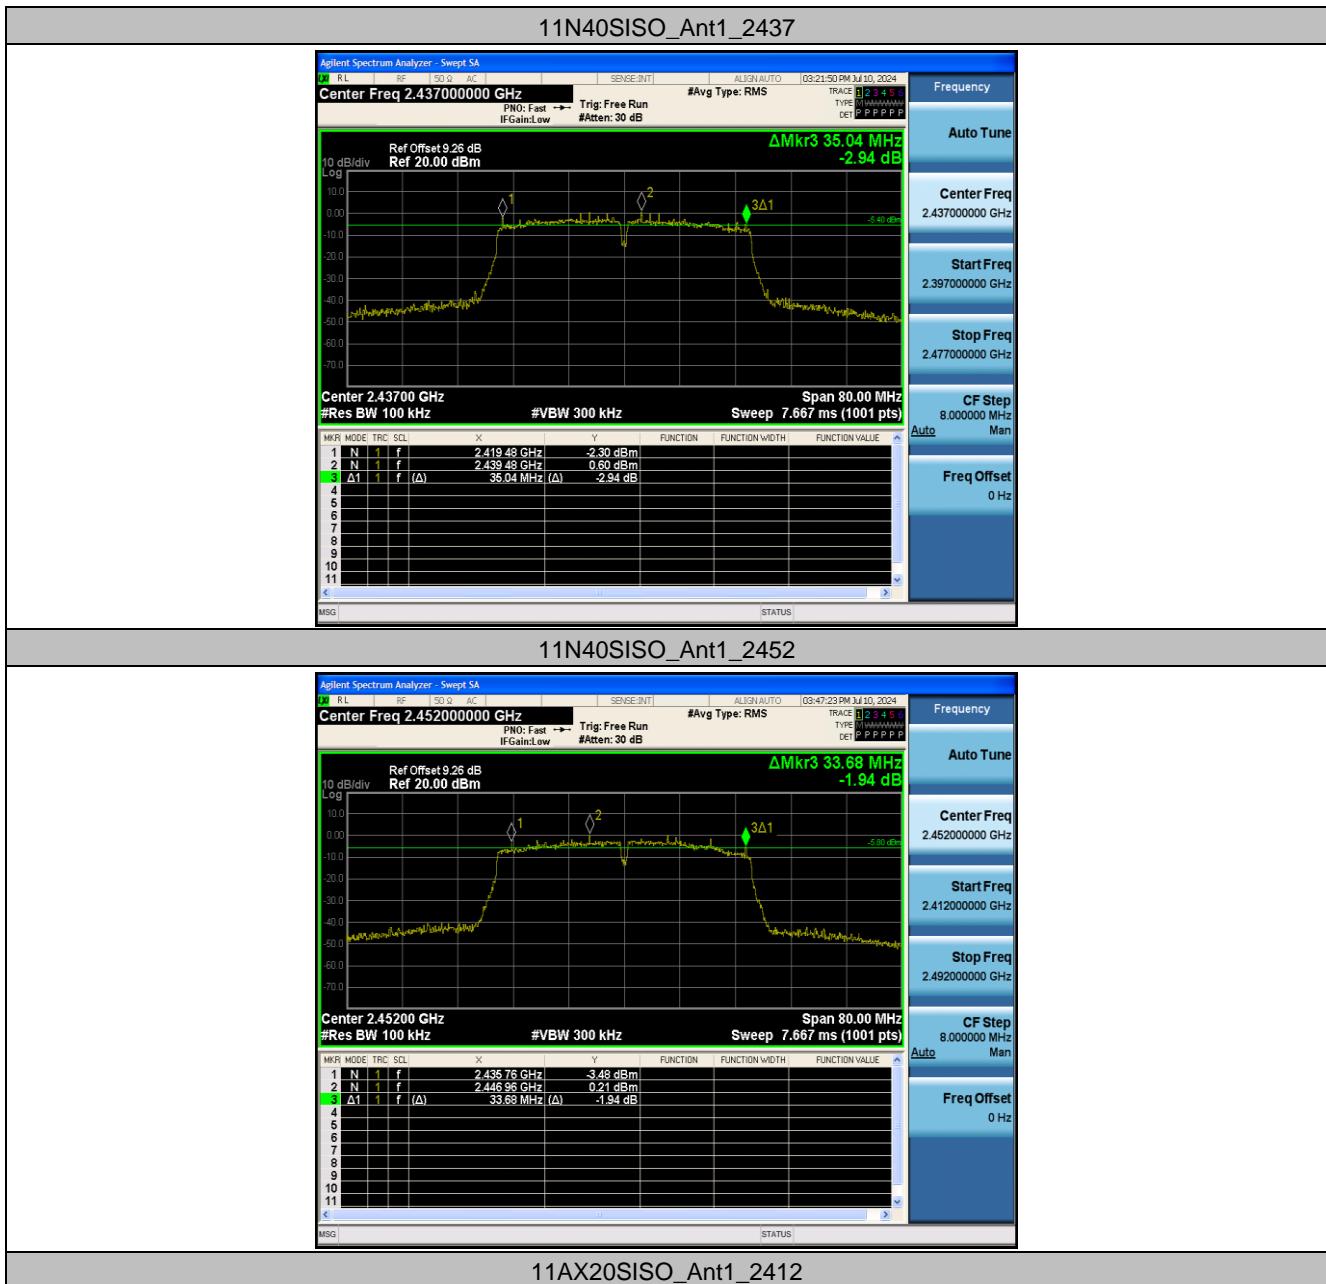



11AX20SISO Apt1 3437

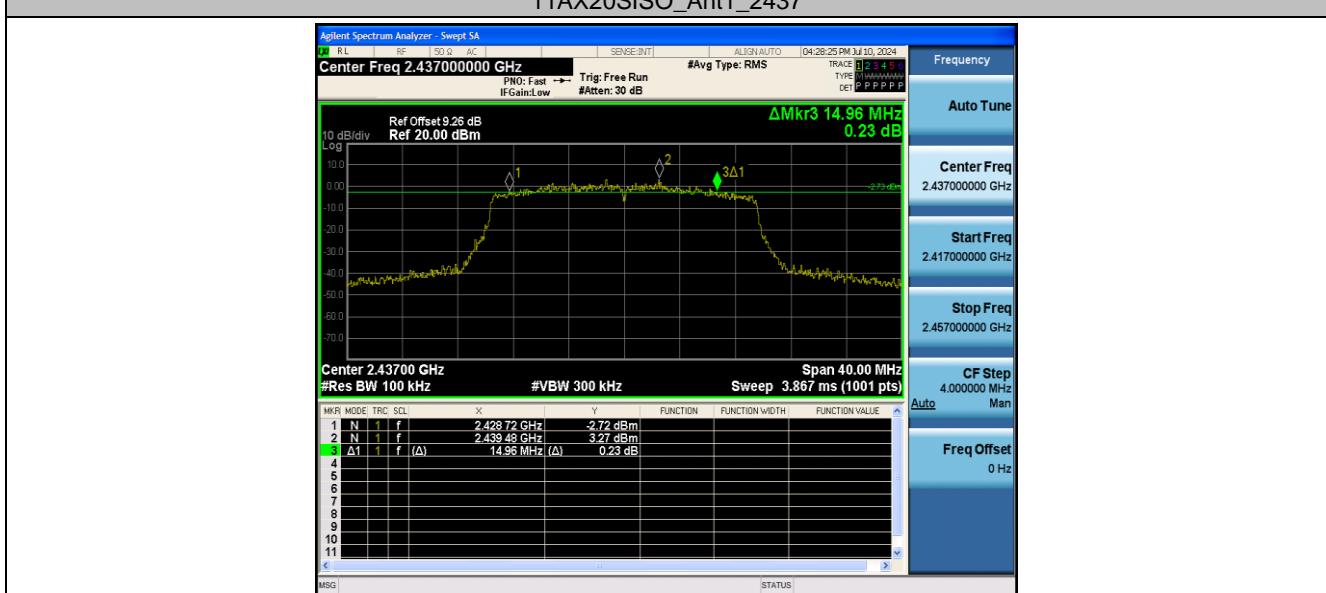

11AX20S|SO Ant1 2462






SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240700132803

Page: 97 of 163

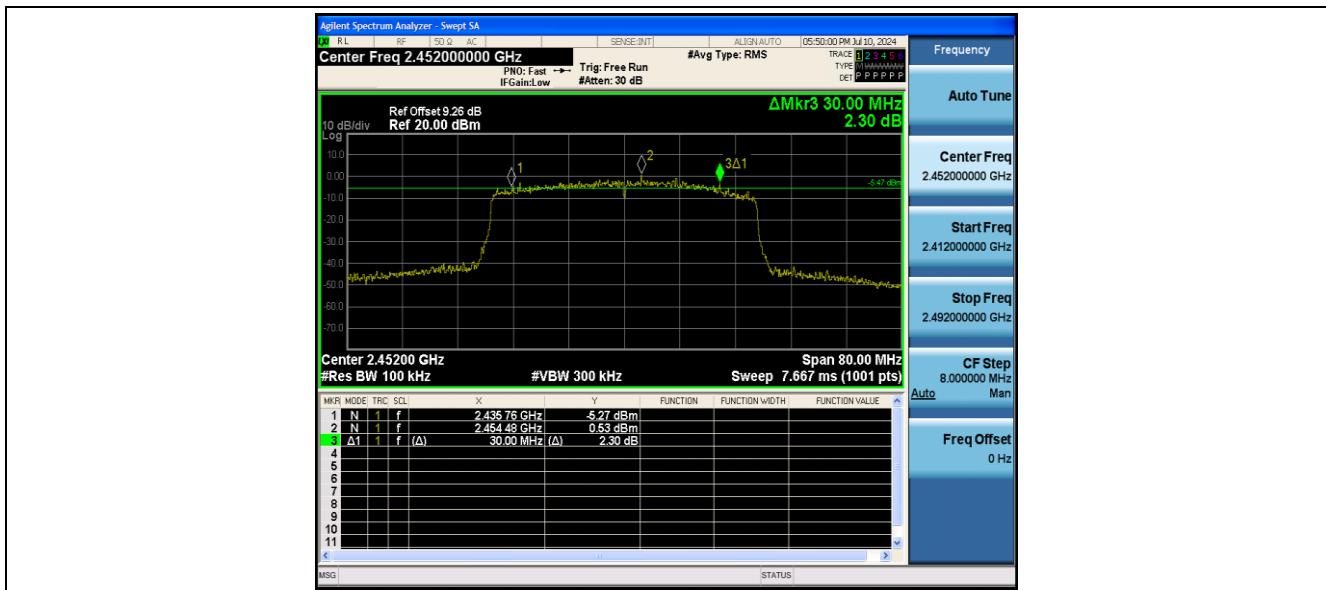


**10.2 Appendix B: Occupied Channel Bandwidth****10.2.1 Test Result**


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.808	2405.6815	2418.4895	---	---
		2437	12.791	2430.5318	2443.3228	---	---
		2462	12.650	2455.5496	2468.1996	---	---
11G	Ant1	2412	16.545	2403.7566	2420.3016	---	---
		2437	16.609	2428.6333	2445.2423	---	---
		2462	16.440	2453.7005	2470.1405	---	---
11N20SISO	Ant1	2412	17.637	2403.2224	2420.8594	---	---
		2437	17.610	2428.1522	2445.7622	---	---
		2462	17.500	2453.1740	2470.6740	---	---
11N40SISO	Ant1	2422	35.774	2404.0611	2439.8351	---	---
		2437	35.982	2418.9629	2454.9449	---	---
		2452	35.656	2434.0622	2469.7182	---	---
11AX20SISO	Ant1	2412	18.722	2402.6836	2421.4056	---	---
		2437	18.837	2427.5667	2446.4037	---	---
		2462	18.716	2452.6063	2471.3223	---	---
11AX40SISO	Ant1	2422	37.016	2403.4788	2440.4948	---	---
		2437	37.413	2418.2759	2455.6889	---	---
		2452	37.130	2433.2921	2470.4221	---	---


### 10.2.2 Test Graphs




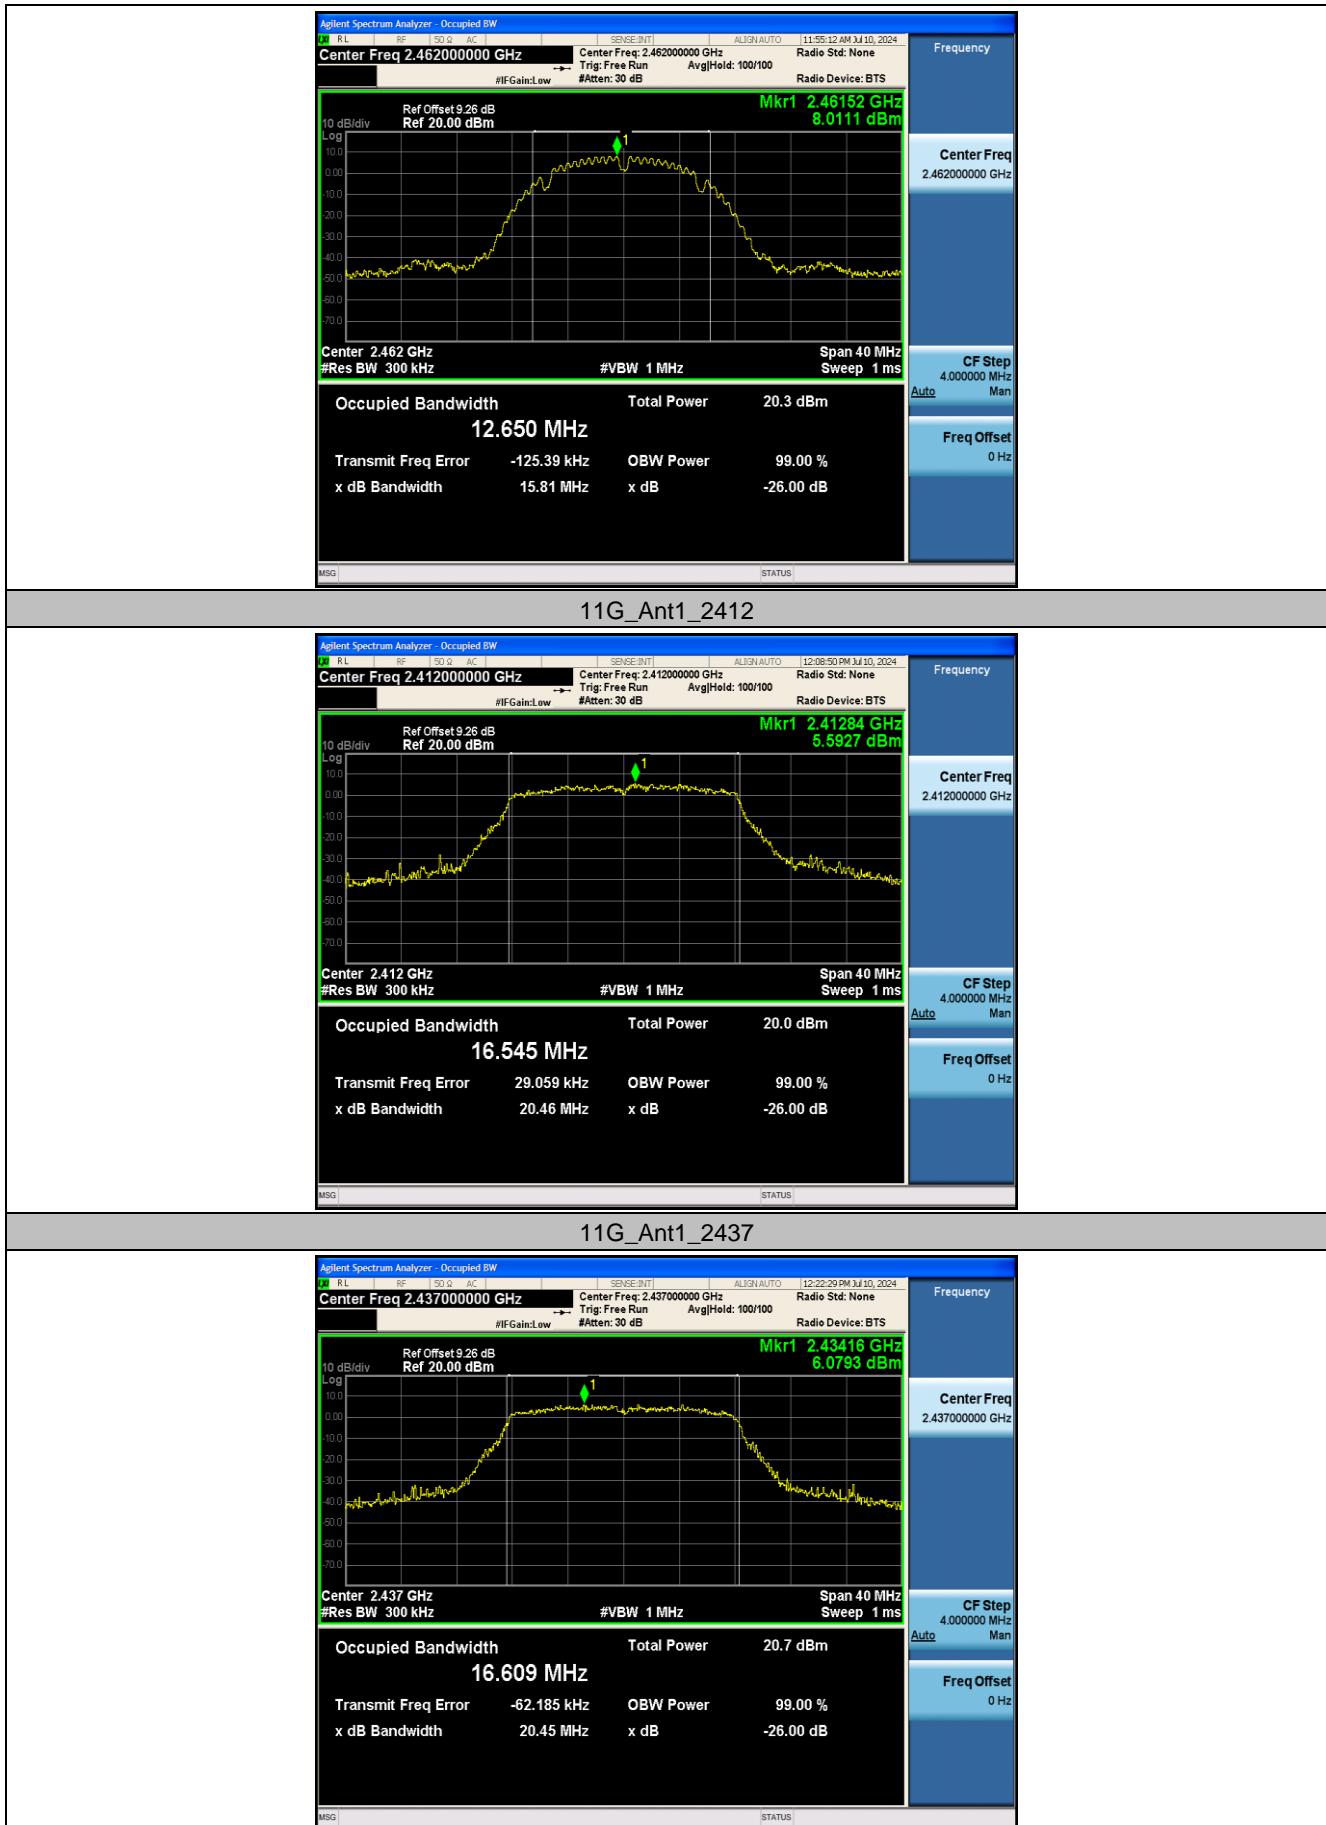




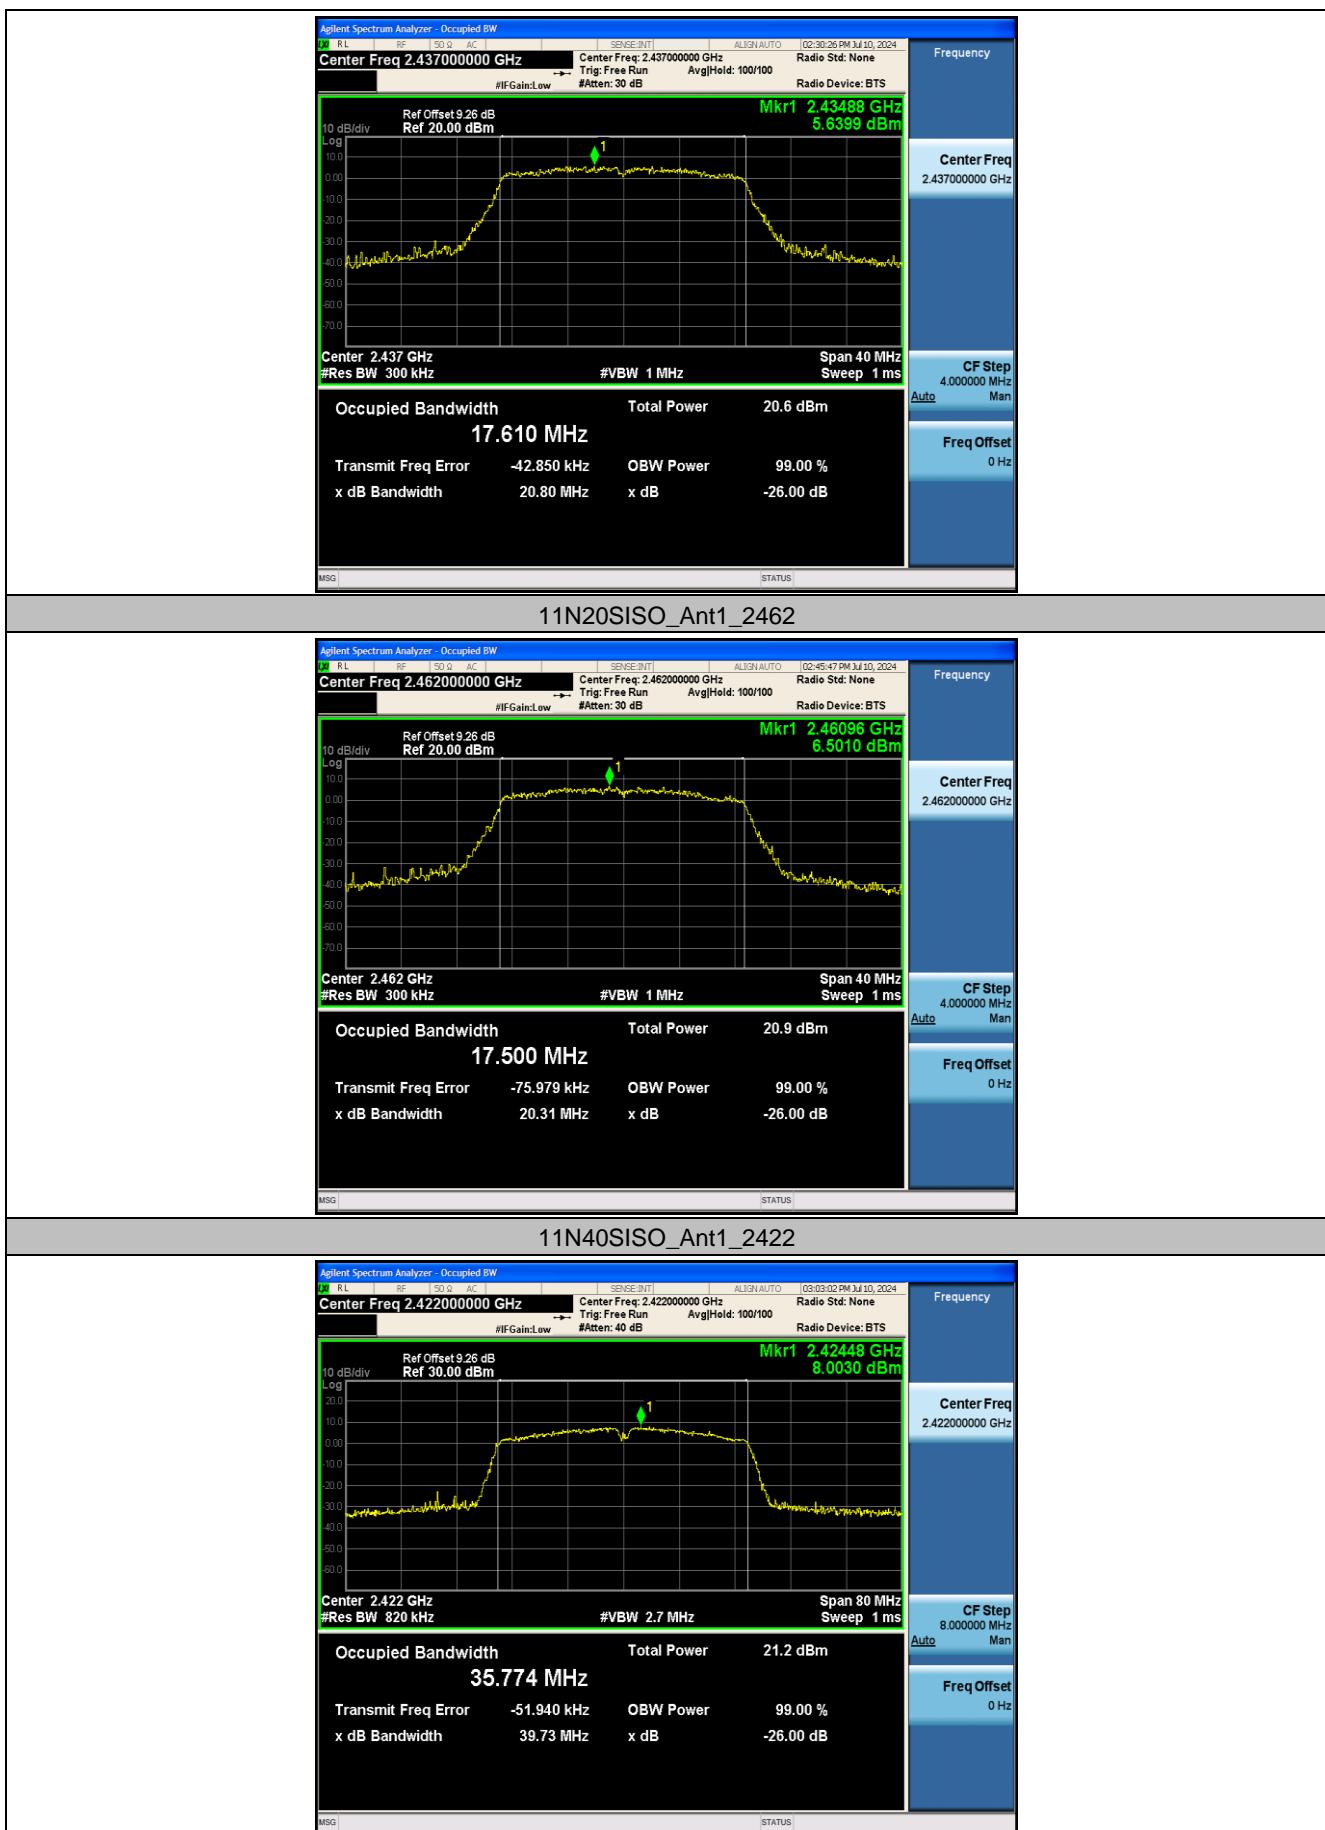

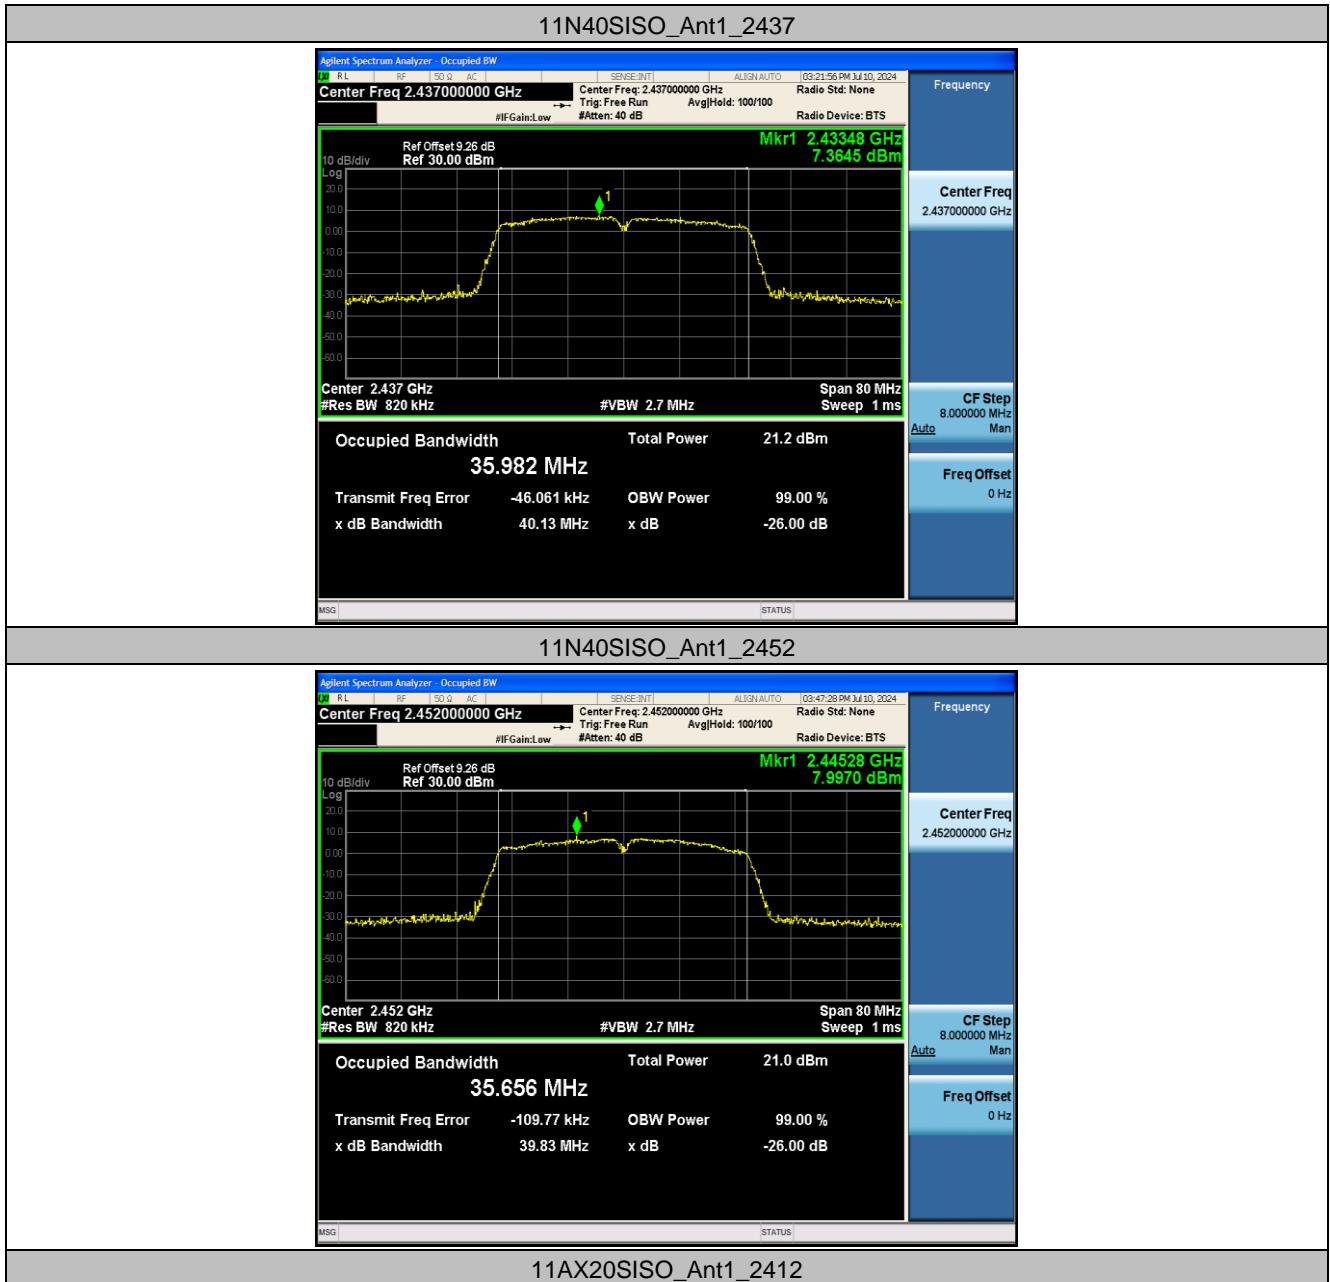

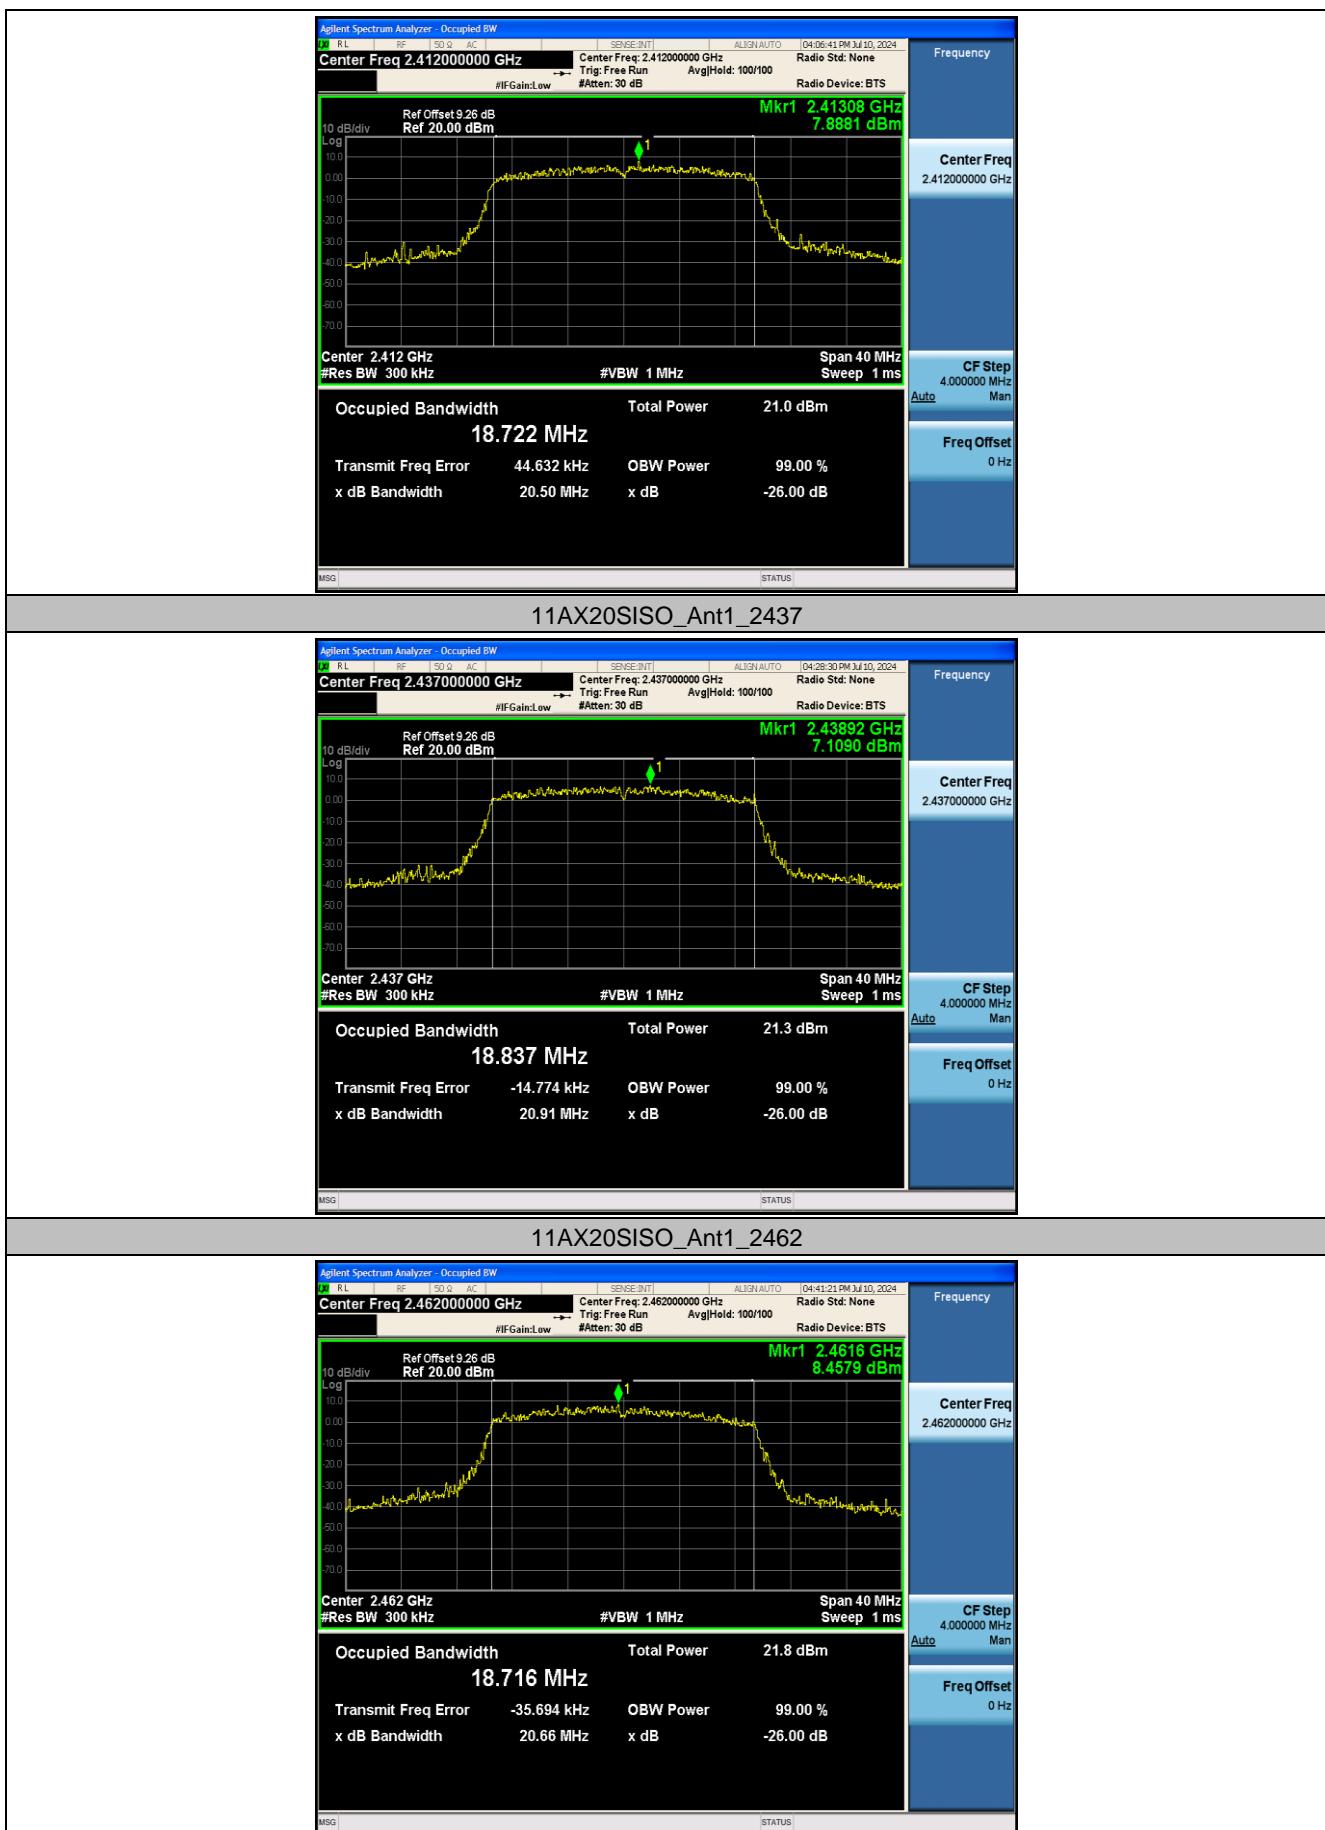



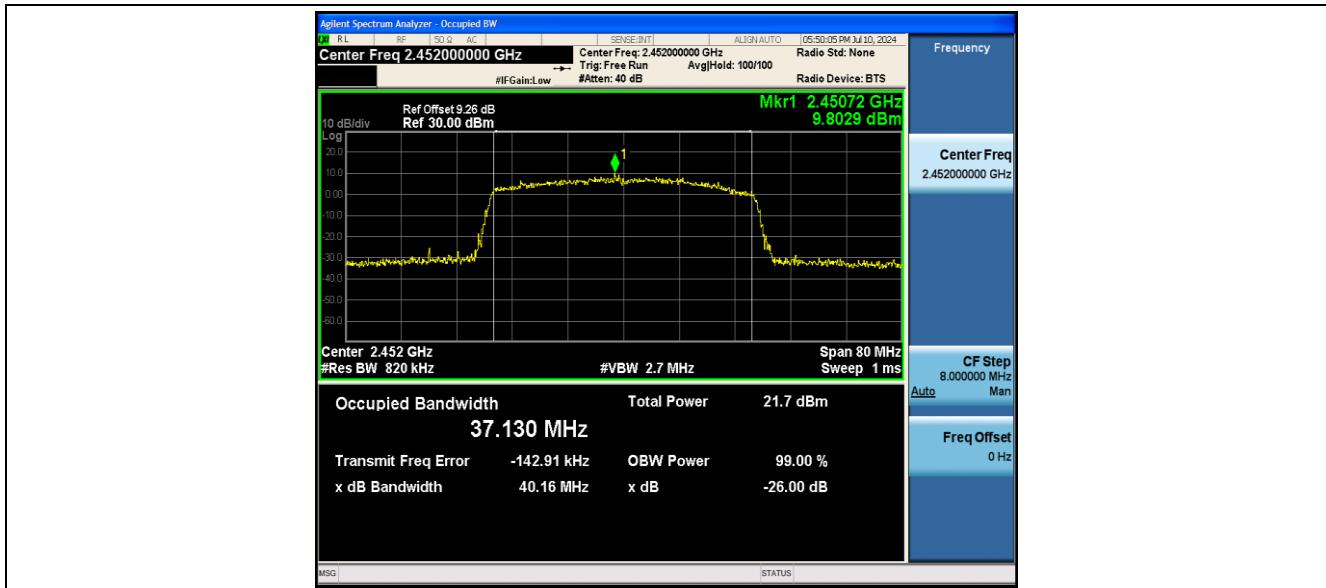

**10.3 Appendix C: Maximum conducted output power****10.3.1 Test Result**

Test Mode	Antenna	Channel	Level [dBm]	10Log(1/X) Factor [dB]	Power [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	11.25	0.45	11.70	≤30.00	PASS
		2437	11.33	0.45	11.78	≤30.00	PASS
		2462	11.55	0.45	12.00	≤30.00	PASS
11G	Ant1	2412	10.24	0.13	10.37	≤30.00	PASS
		2437	10.79	0.13	10.92	≤30.00	PASS
		2462	11.07	0.13	11.20	≤30.00	PASS
11N20SISO	Ant1	2412	10.12	0.13	10.25	≤30.00	PASS
		2437	10.69	0.14	10.83	≤30.00	PASS
		2462	10.99	0.13	11.12	≤30.00	PASS
11N40SISO	Ant1	2422	10.26	0.22	10.48	≤30.00	PASS
		2437	9.93	0.22	10.15	≤30.00	PASS
		2452	10.30	0.22	10.52	≤30.00	PASS
11AX20SISO	Ant1	2412	9.76	0.15	9.91	≤30.00	PASS
		2437	10.48	0.15	10.63	≤30.00	PASS
		2462	10.73	0.15	10.88	≤30.00	PASS
11AX40SISO	Ant1	2422	9.54	0.13	9.67	≤30.00	PASS
		2437	10.33	0.13	10.46	≤30.00	PASS
		2452	10.53	0.15	10.68	≤30.00	PASS

### 10.3.2 Test Graphs

