

Appendix Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: Electric surfboard

Trade Mark: FULSEER

Test Model: S1 Plus

FCC ID: 2BHUB-S1PLUS

Environmental Conditions

Temperature:	24.5℃
Relative Humidity:	55%
ATM Pressure:	100.0 kPa
Test Engineer:	Tony luo
Supervised by:	Max zhang
NOTE	N/A

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	100.267	100.267	100.00	0.00	0.00
		2440	100.267	100.267	100.00	0.00	0.00
		2480	100.267	100.267	100.00	0.00	0.00
2M	SISO	2402	100.267	100.267	100.00	0.00	0.00
		2440	100.267	100.267	100.00	0.00	0.00
		2480	100.267	100.267	100.00	0.00	0.00

1.2 Test Graph


1.2.1 Ant1

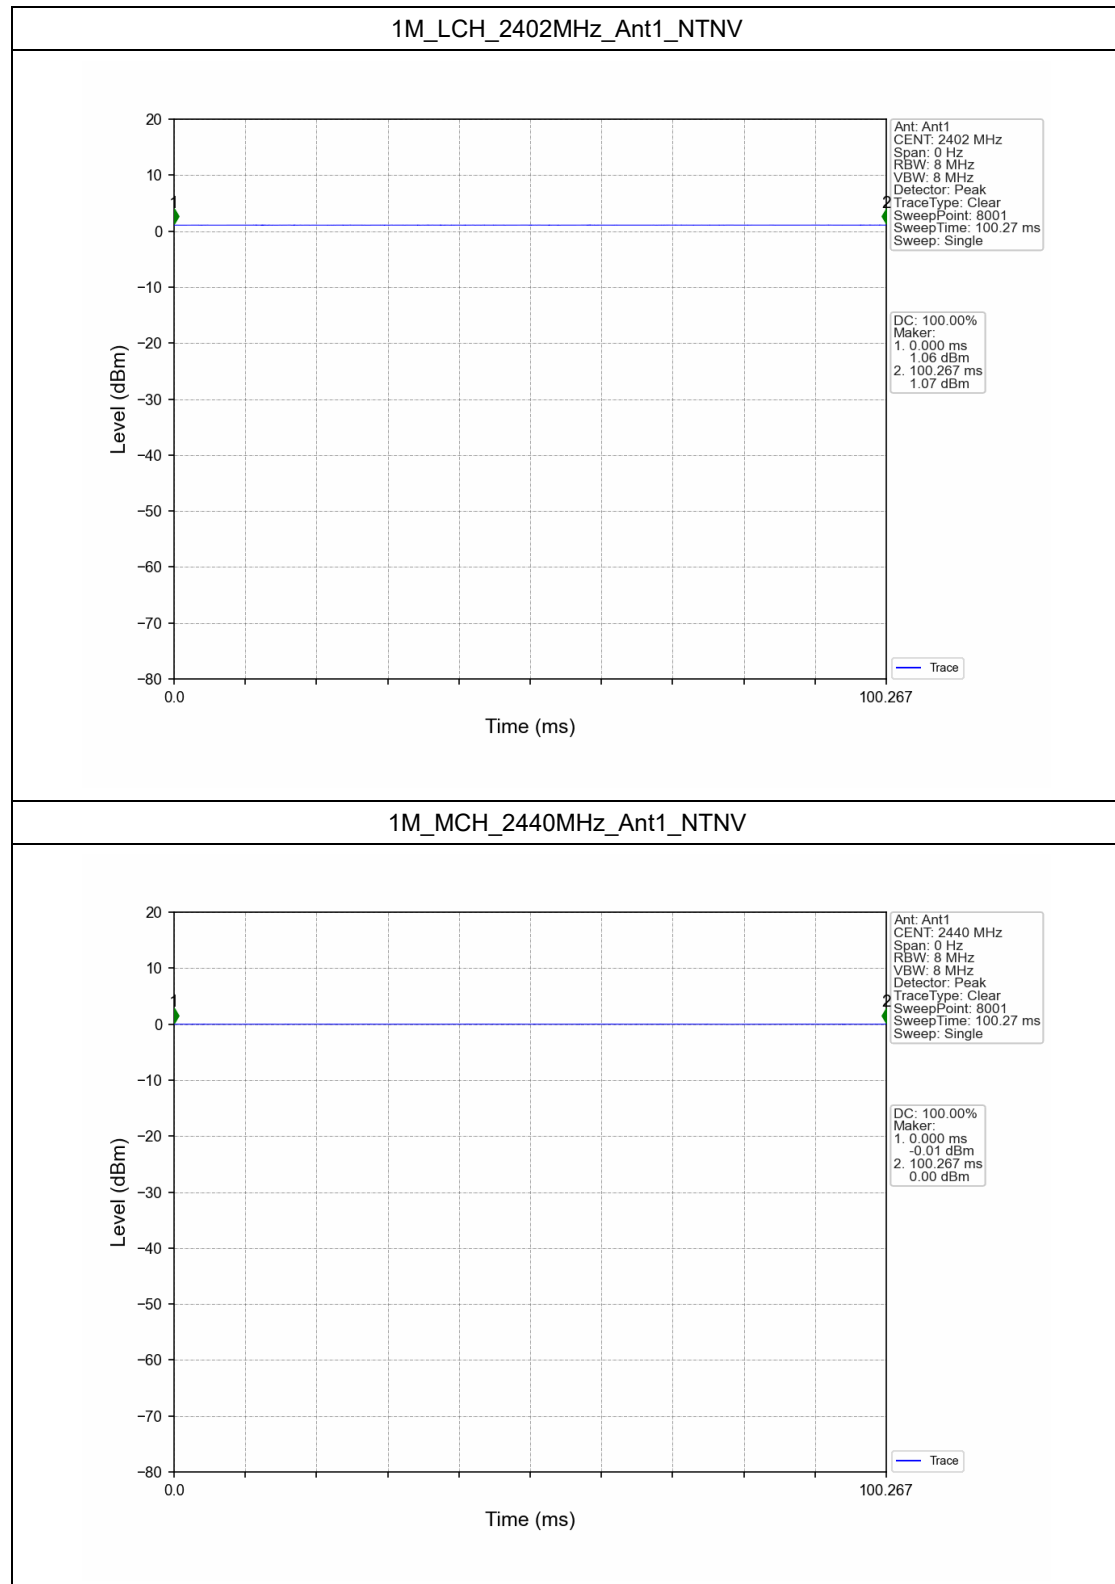


1M_HCH_2480MHz_Ant1_NTNV

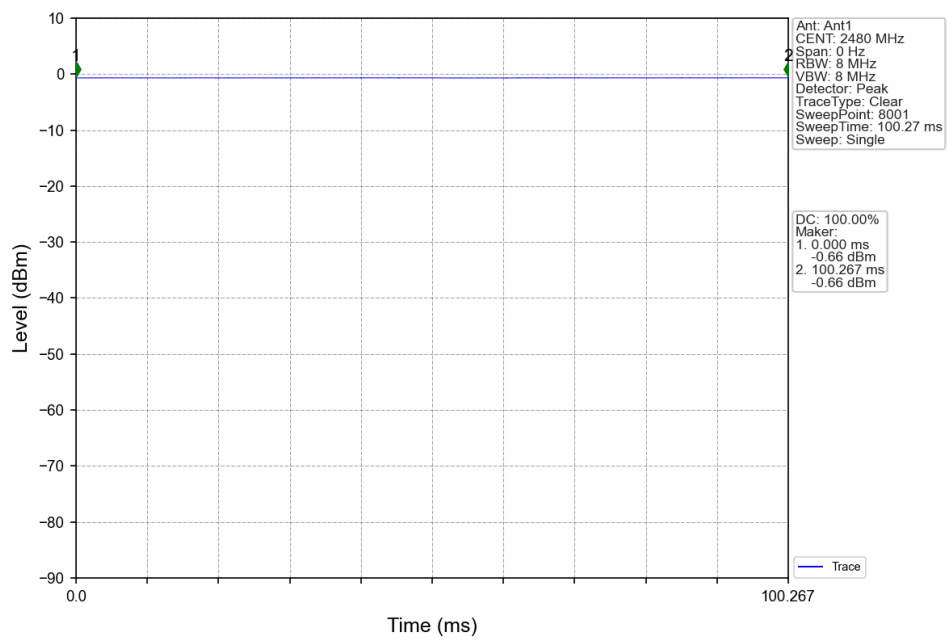


2M_LCH_2402MHz_Ant1_NTNV

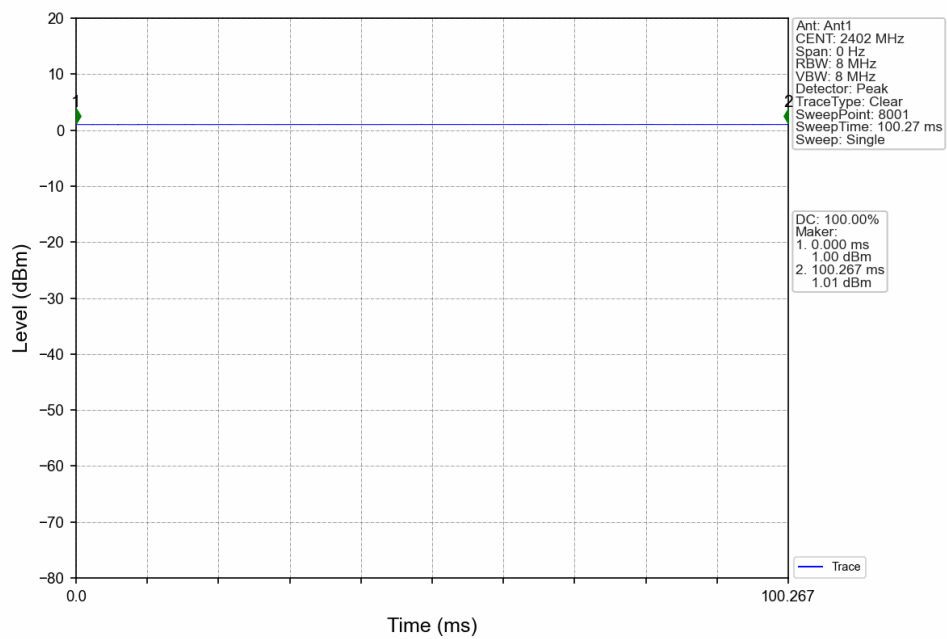

2M_MCH_2440MHz_Ant1_NTNV

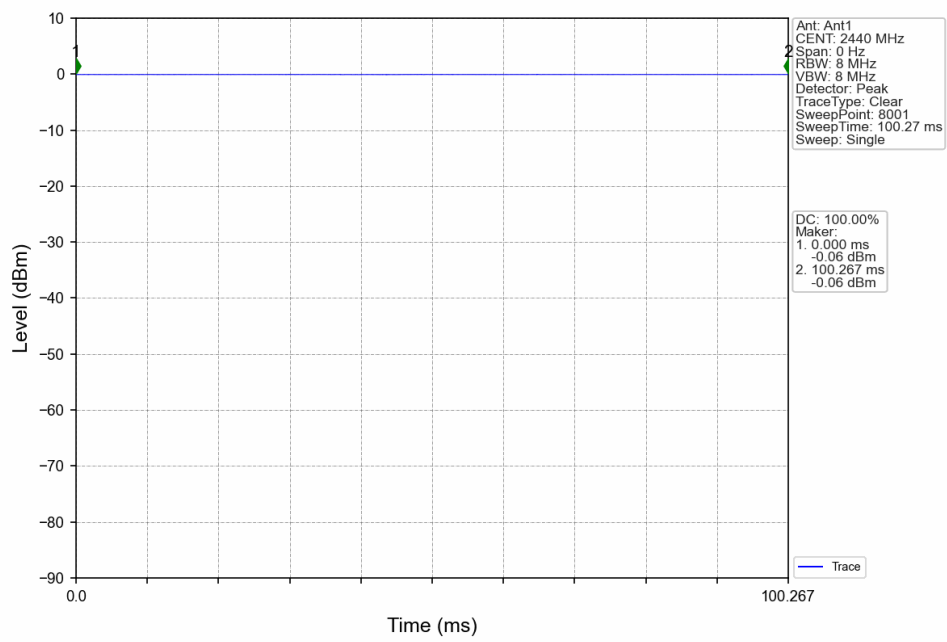

2M_HCH_2480MHz_Ant1_NTNV

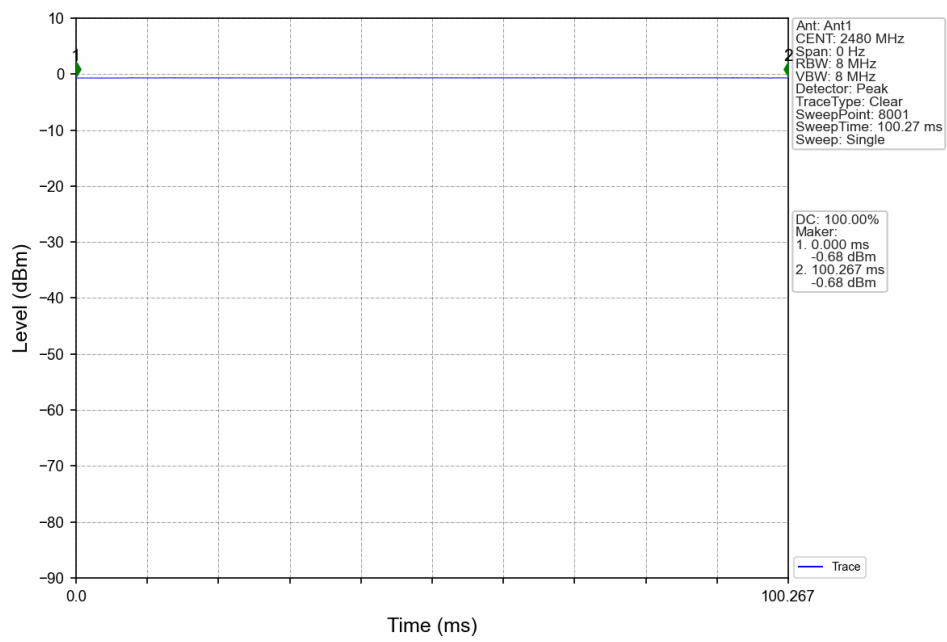

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.015	/	Pass
		2440	1	1.031	/	Pass
		2480	1	1.018	/	Pass
2M	SISO	2402	1	2.037	/	Pass
		2440	1	2.044	/	Pass
		2480	1	2.037	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.668	≥ 0.5	Pass
		2440	1	0.685	≥ 0.5	Pass
		2480	1	0.684	≥ 0.5	Pass
2M	SISO	2402	1	1.375	≥ 0.5	Pass
		2440	1	1.388	≥ 0.5	Pass
		2480	1	1.395	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

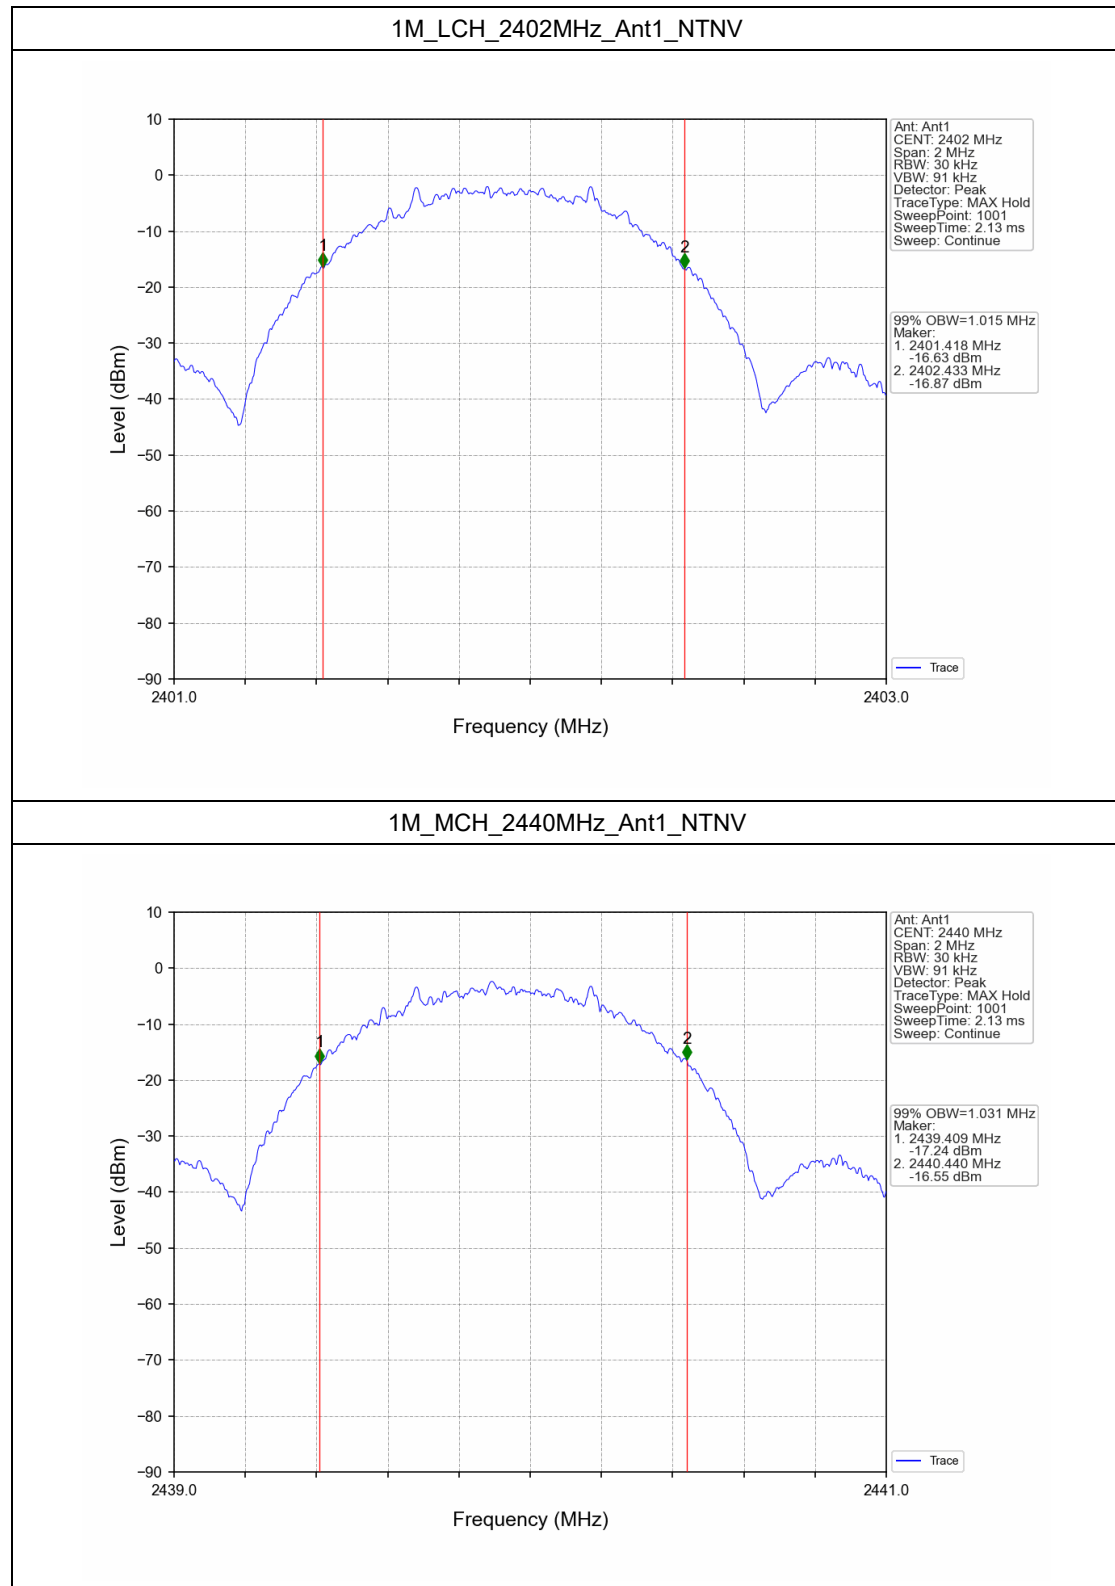


1M_HCH_2480MHz_Ant1_NTNV

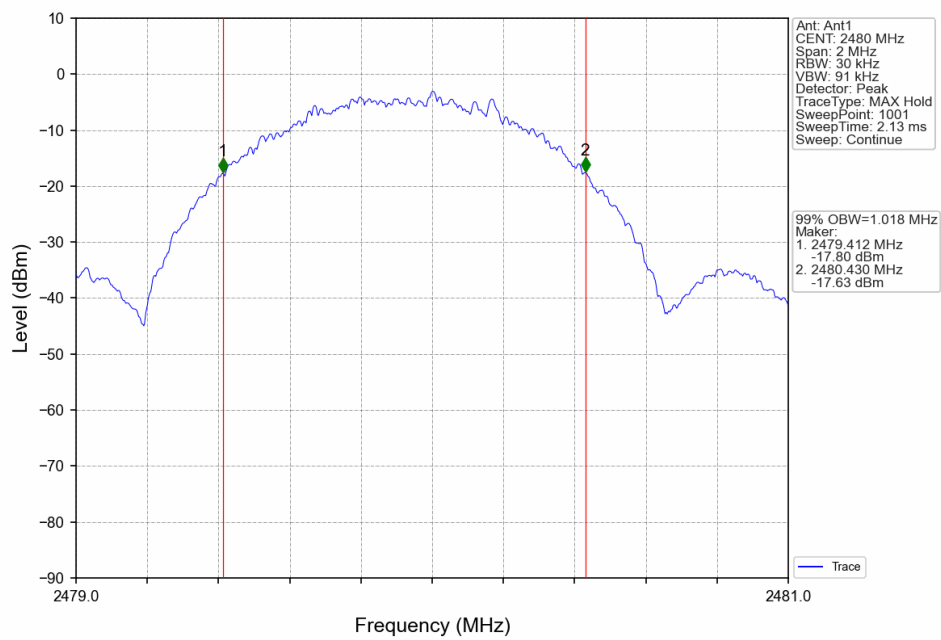


2M_LCH_2402MHz_Ant1_NTNV

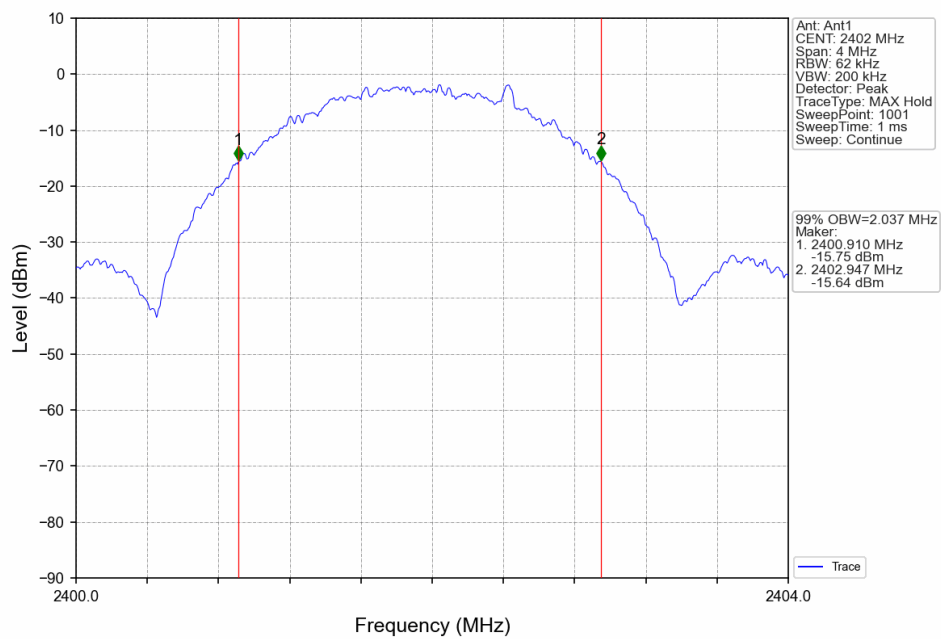


2M_MCH_2440MHz_Ant1_NTNV

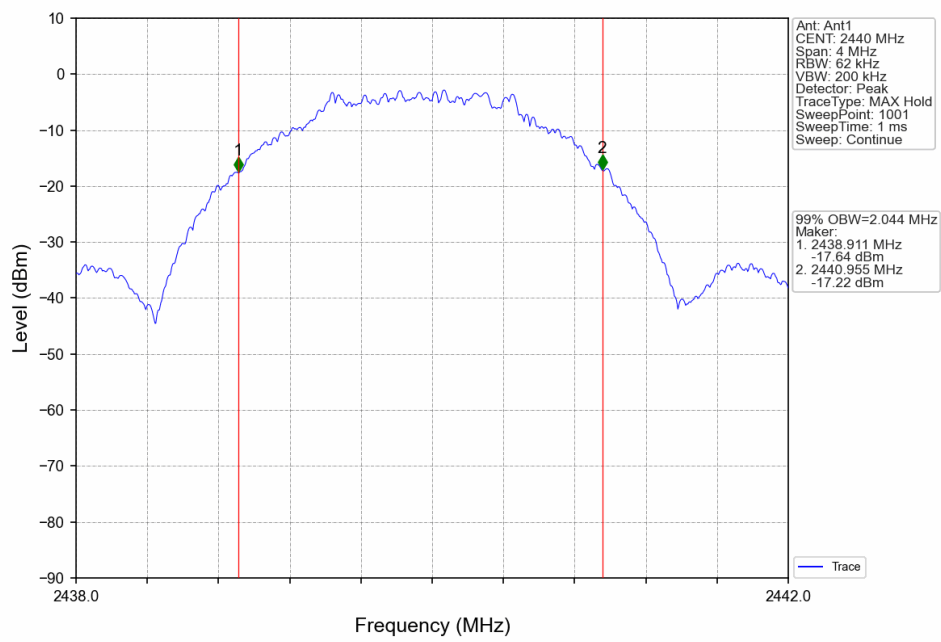


2M_HCH_2480MHz_Ant1_NTNV

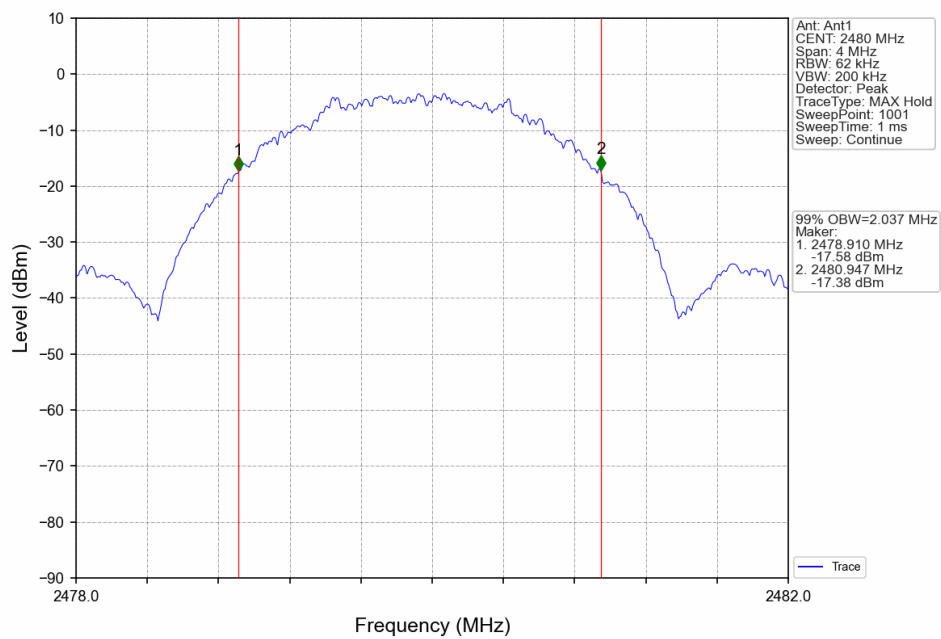


2.2.2 6dB BW

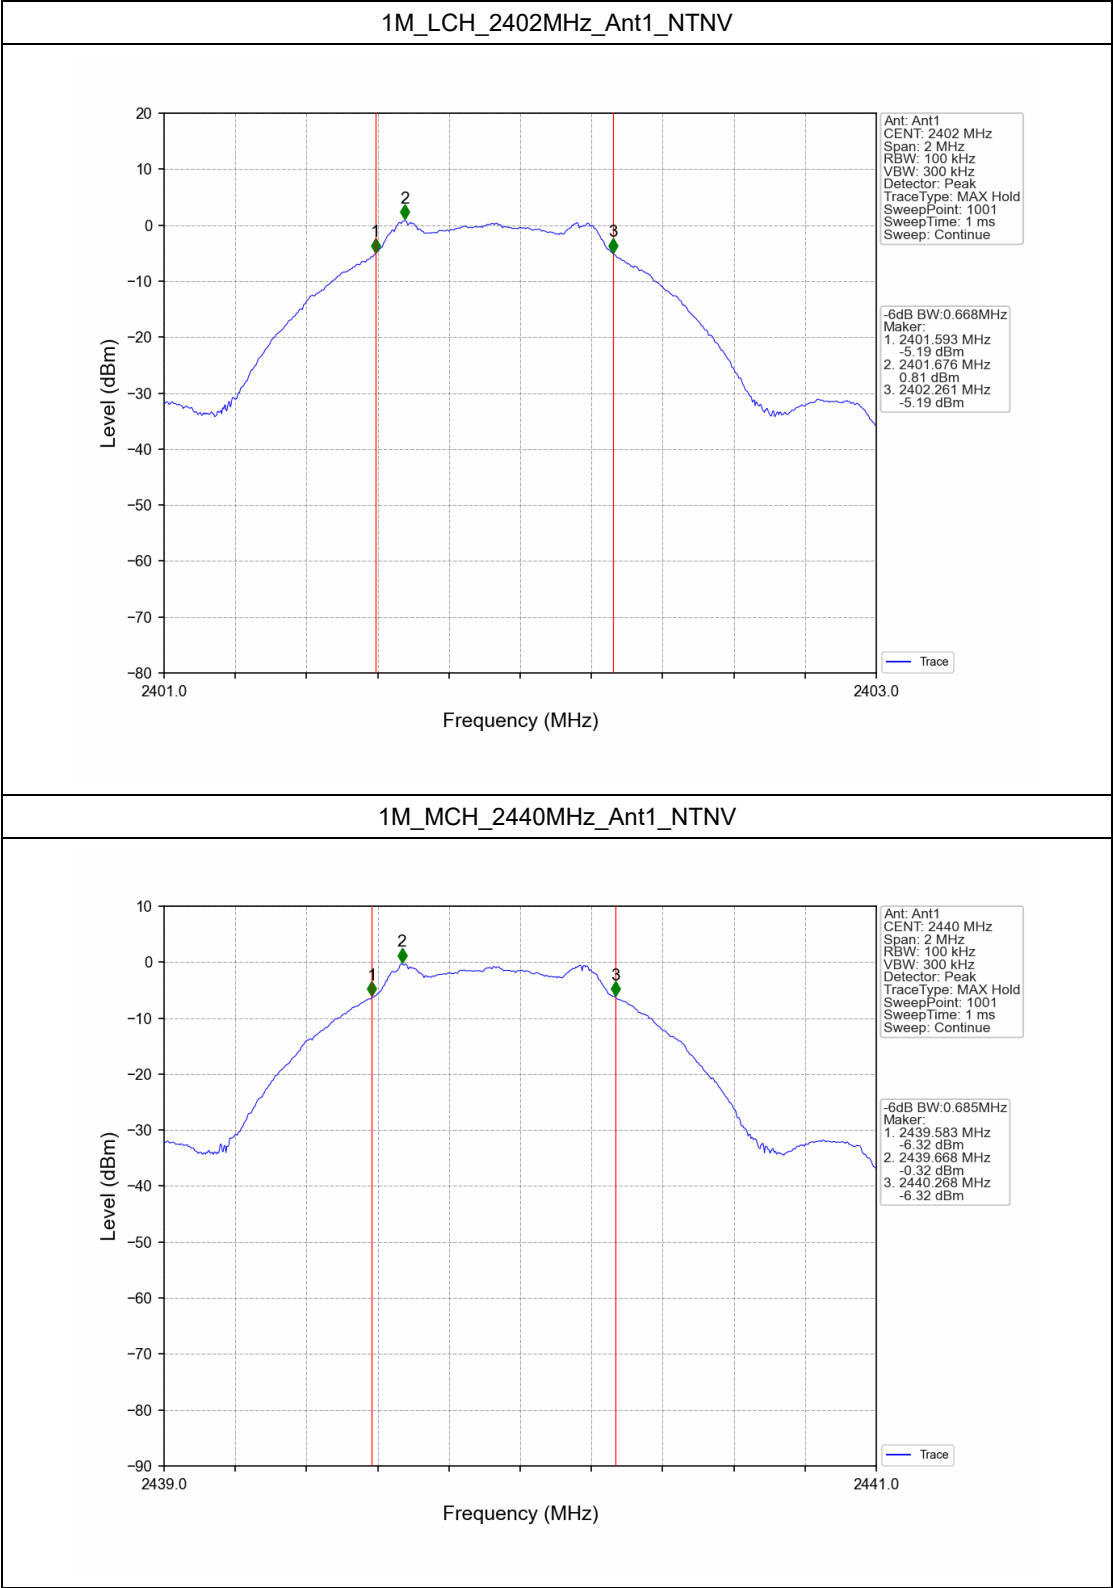


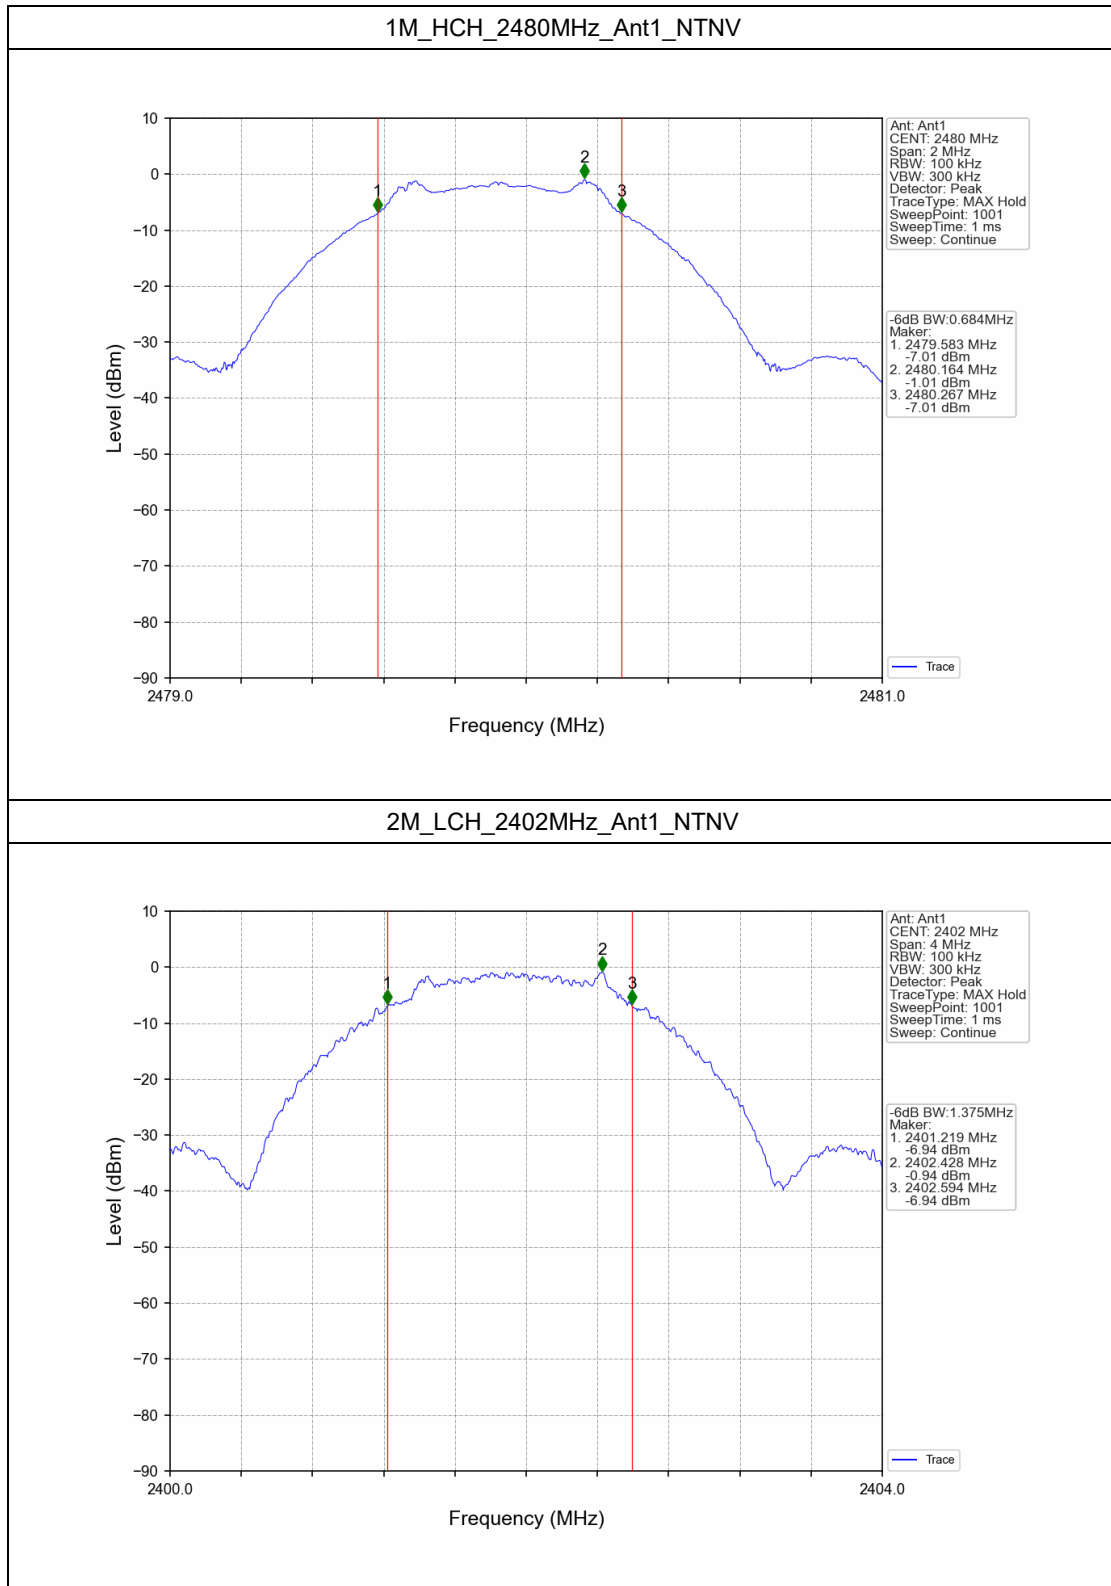

2M_MCH_2440MHz_Ant1_NTNV

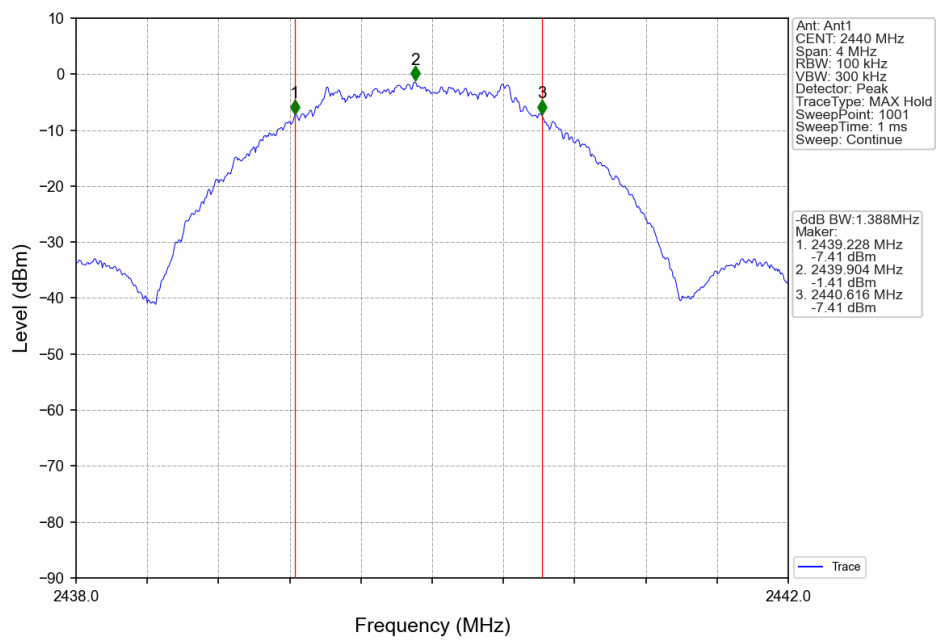

2M_HCH_2480MHz_Ant1_NTNV

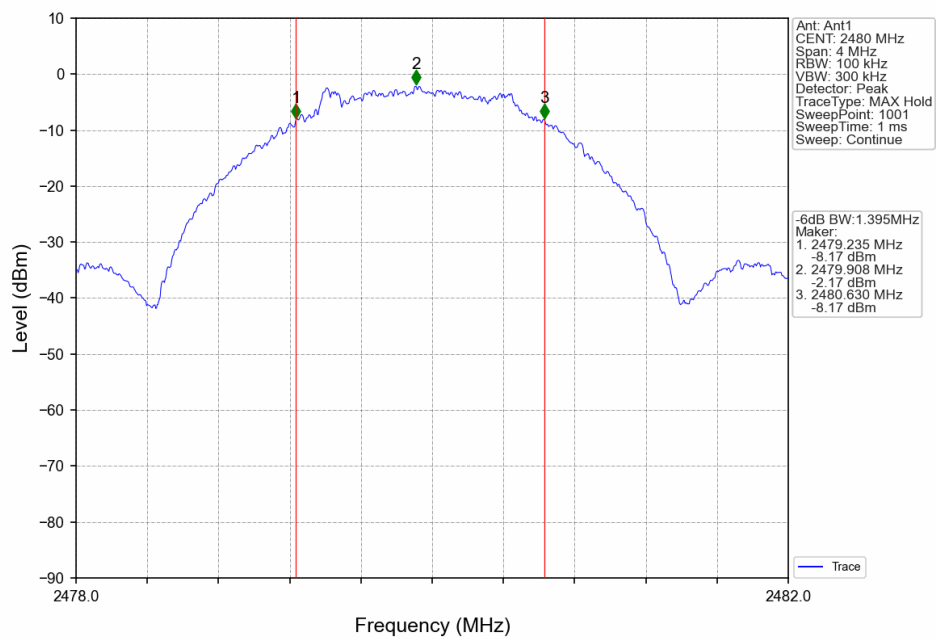

3. Maximum Conducted Output Power


3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	1.05	<=29.05	Pass
		2440	-0.02	<=29.05	Pass
		2480	-0.69	<=29.05	Pass
2M	SISO	2402	1.00	<=29.05	Pass
		2440	-0.07	<=29.05	Pass
		2480	-0.66	<=29.05	Pass
Note1: Antenna Gain: Ant1: 6.95dBi;					

3.2 Test Graph


3.2.1 Power

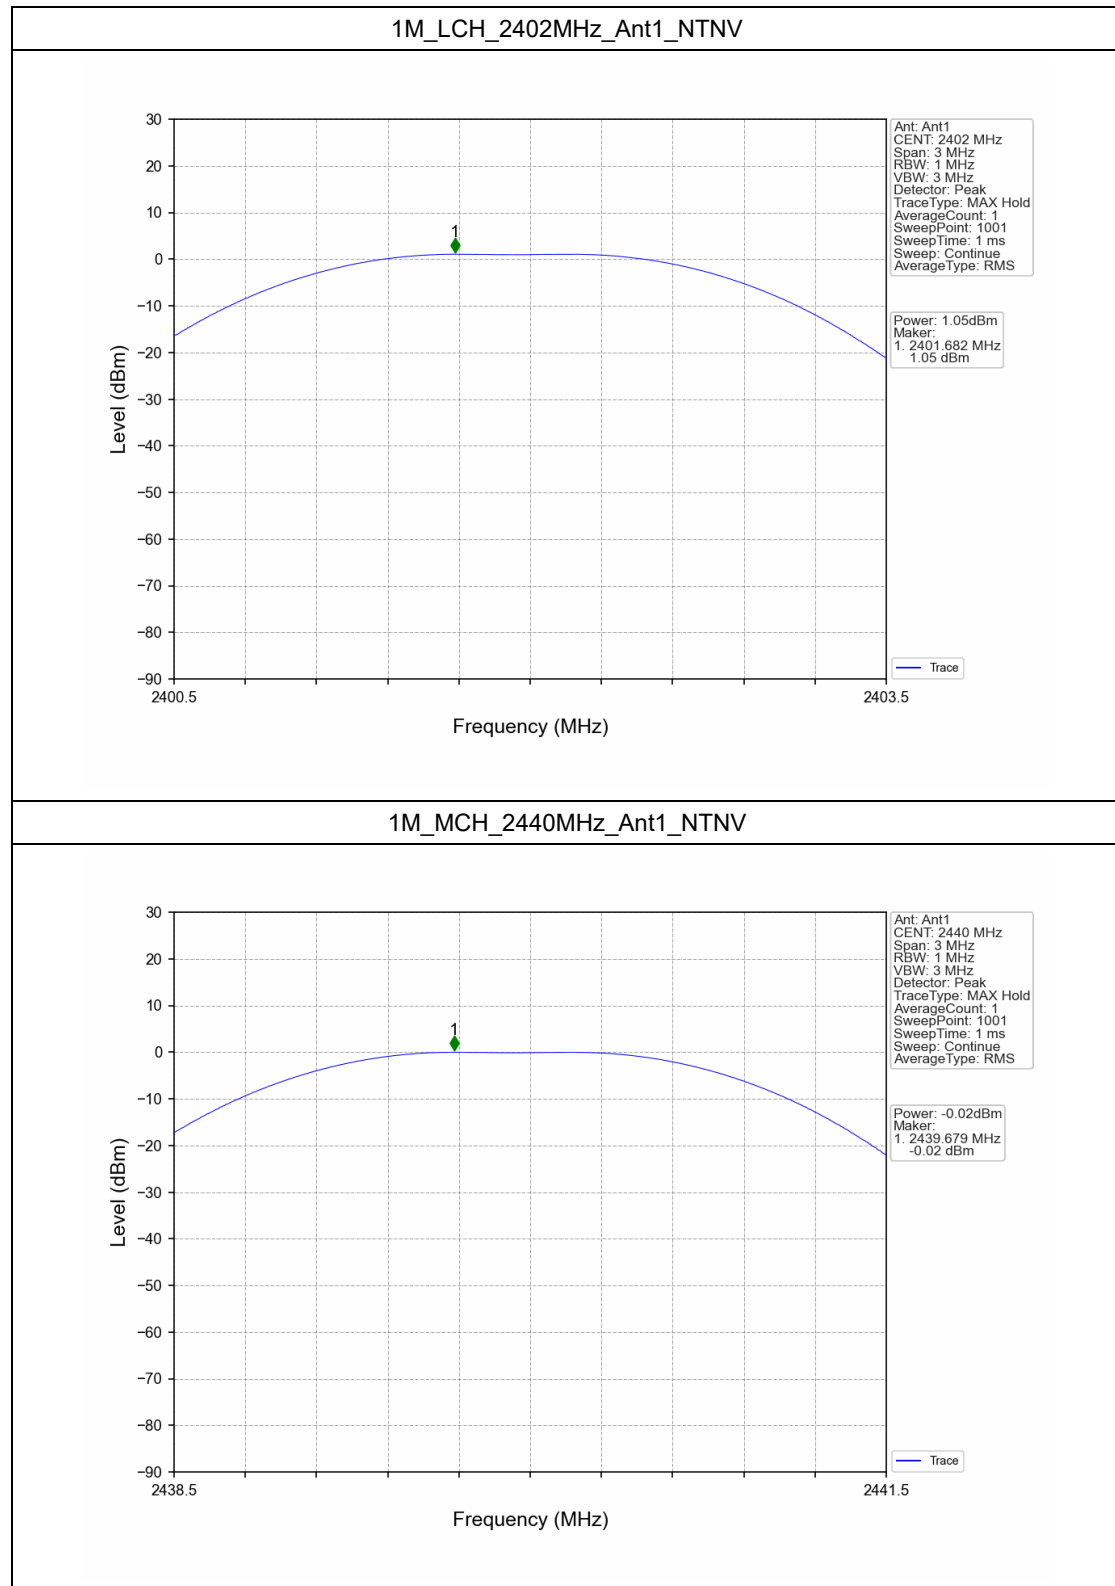


1M_HCH_2480MHz_Ant1_NTNV

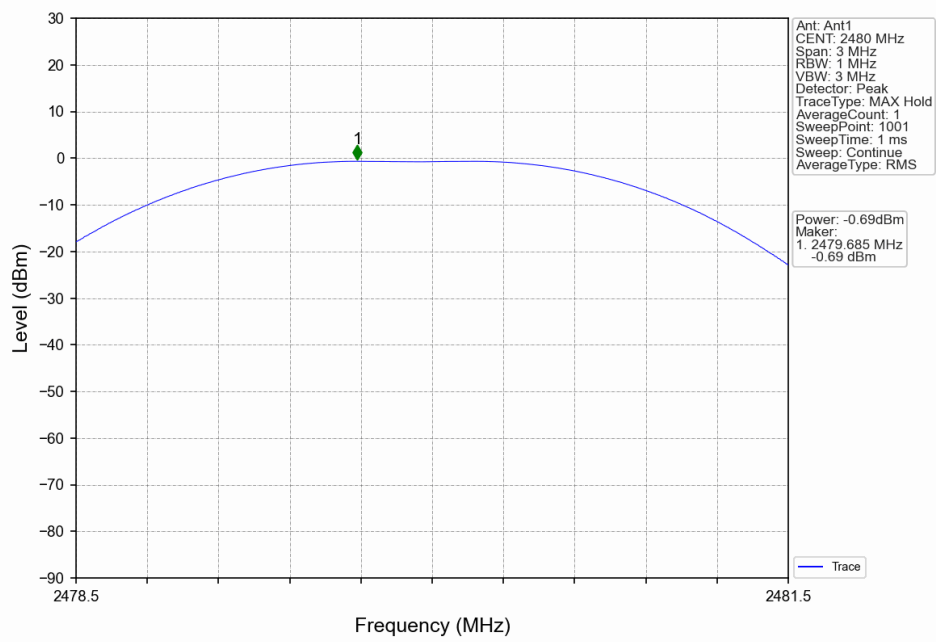


2M_LCH_2402MHz_Ant1_NTNV

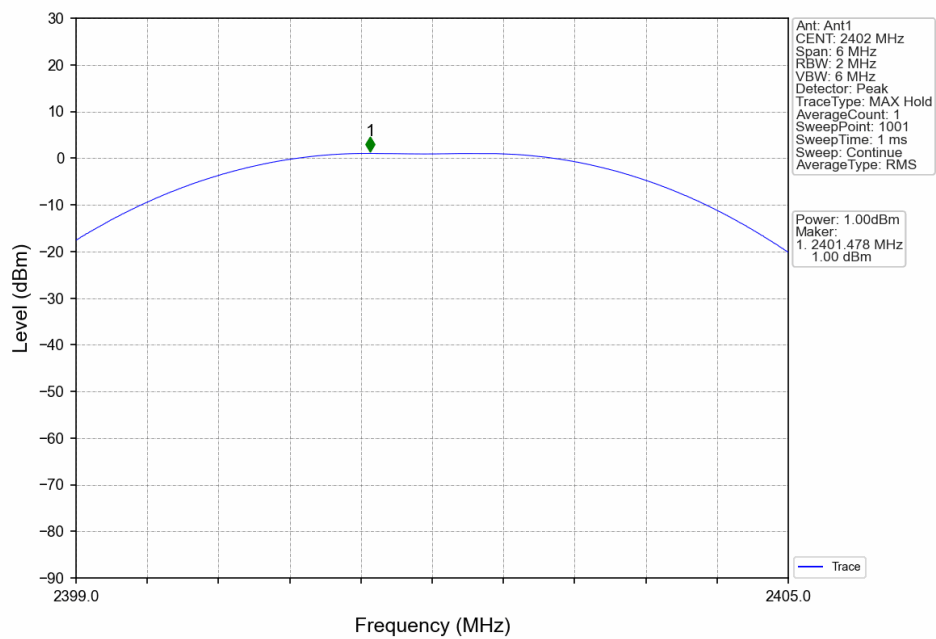

2M_MCH_2440MHz_Ant1_NTNV

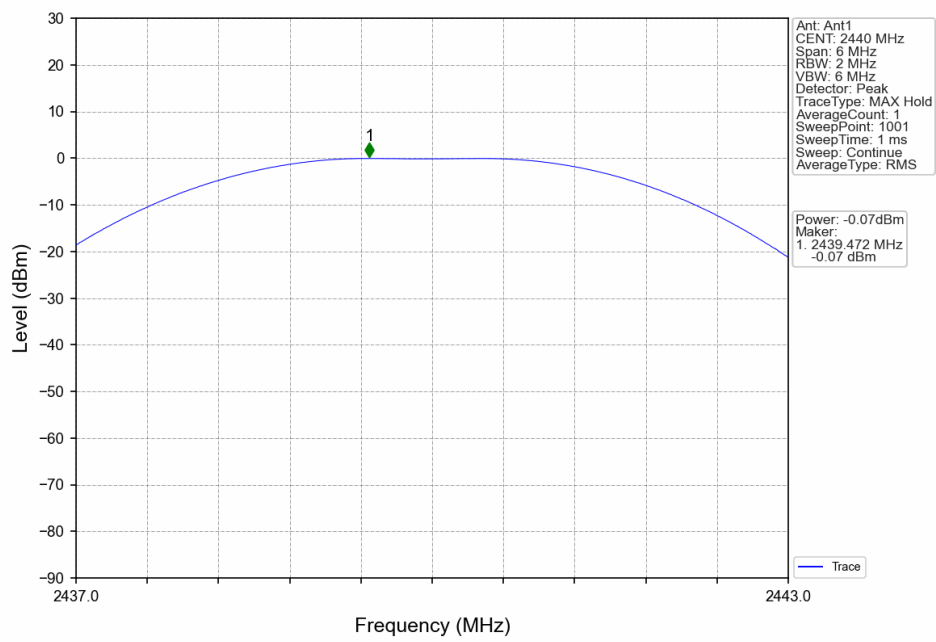

2M_HCH_2480MHz_Ant1_NTNV

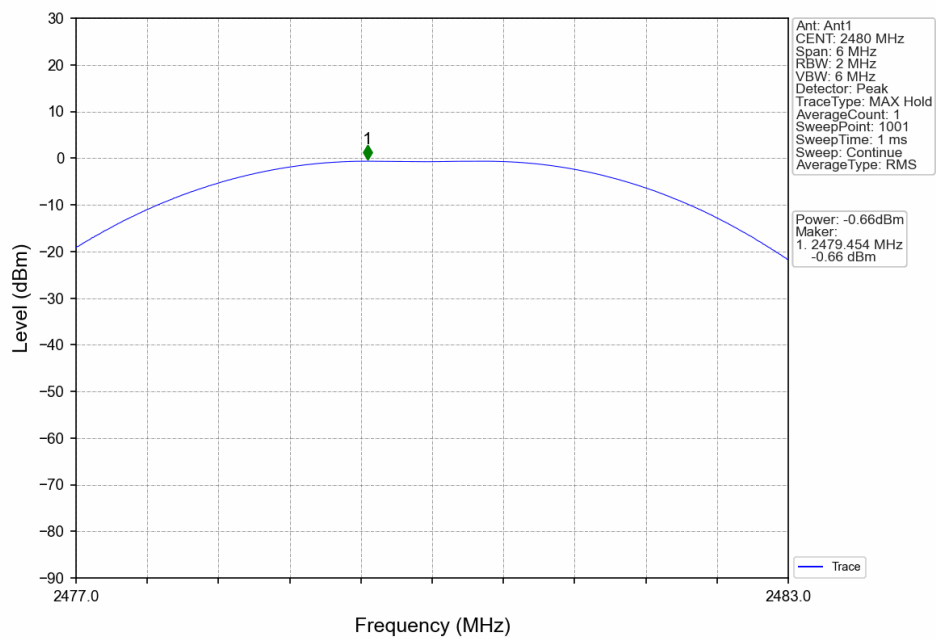

4. Maximum Power Spectral Density


4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-9.17	<=8	Pass
		2440	-9.77	<=8	Pass
		2480	-10.16	<=8	Pass
2M	SISO	2402	-12.32	<=8	Pass
		2440	-13.75	<=8	Pass
		2480	-13.95	<=8	Pass
Note1: Antenna Gain: Ant1: 6.95dBi;					


4.2 Test Graph

4.2.1 PSD

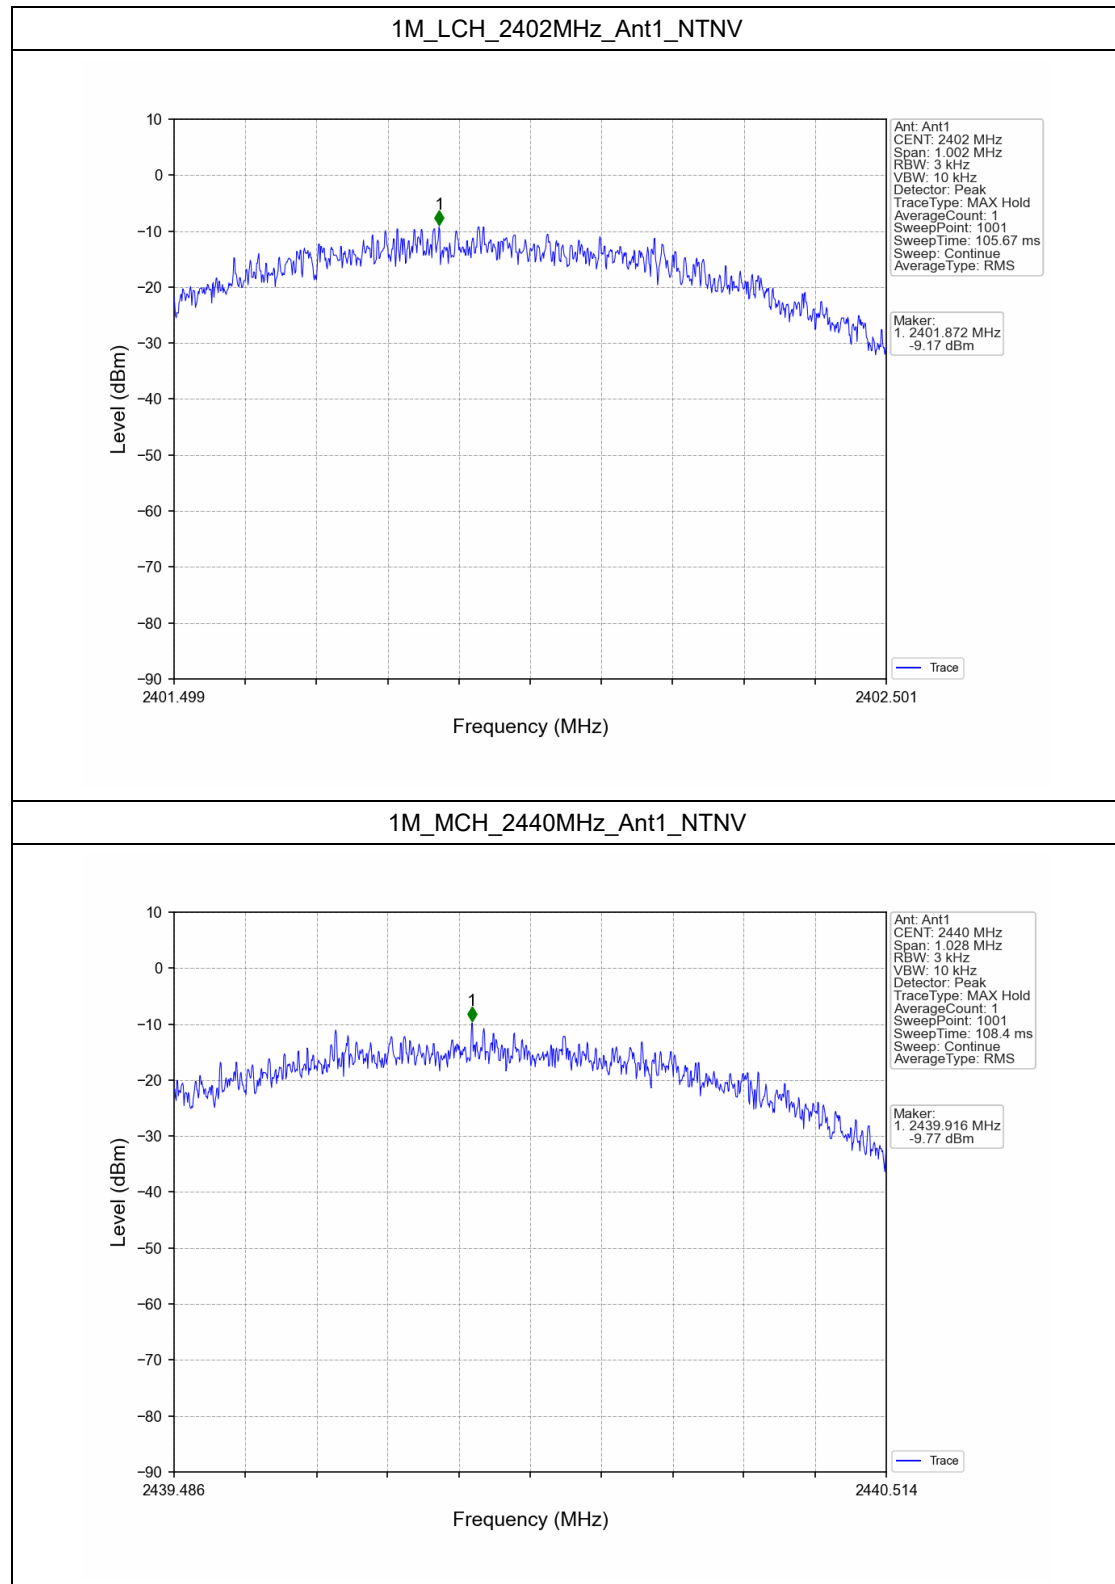


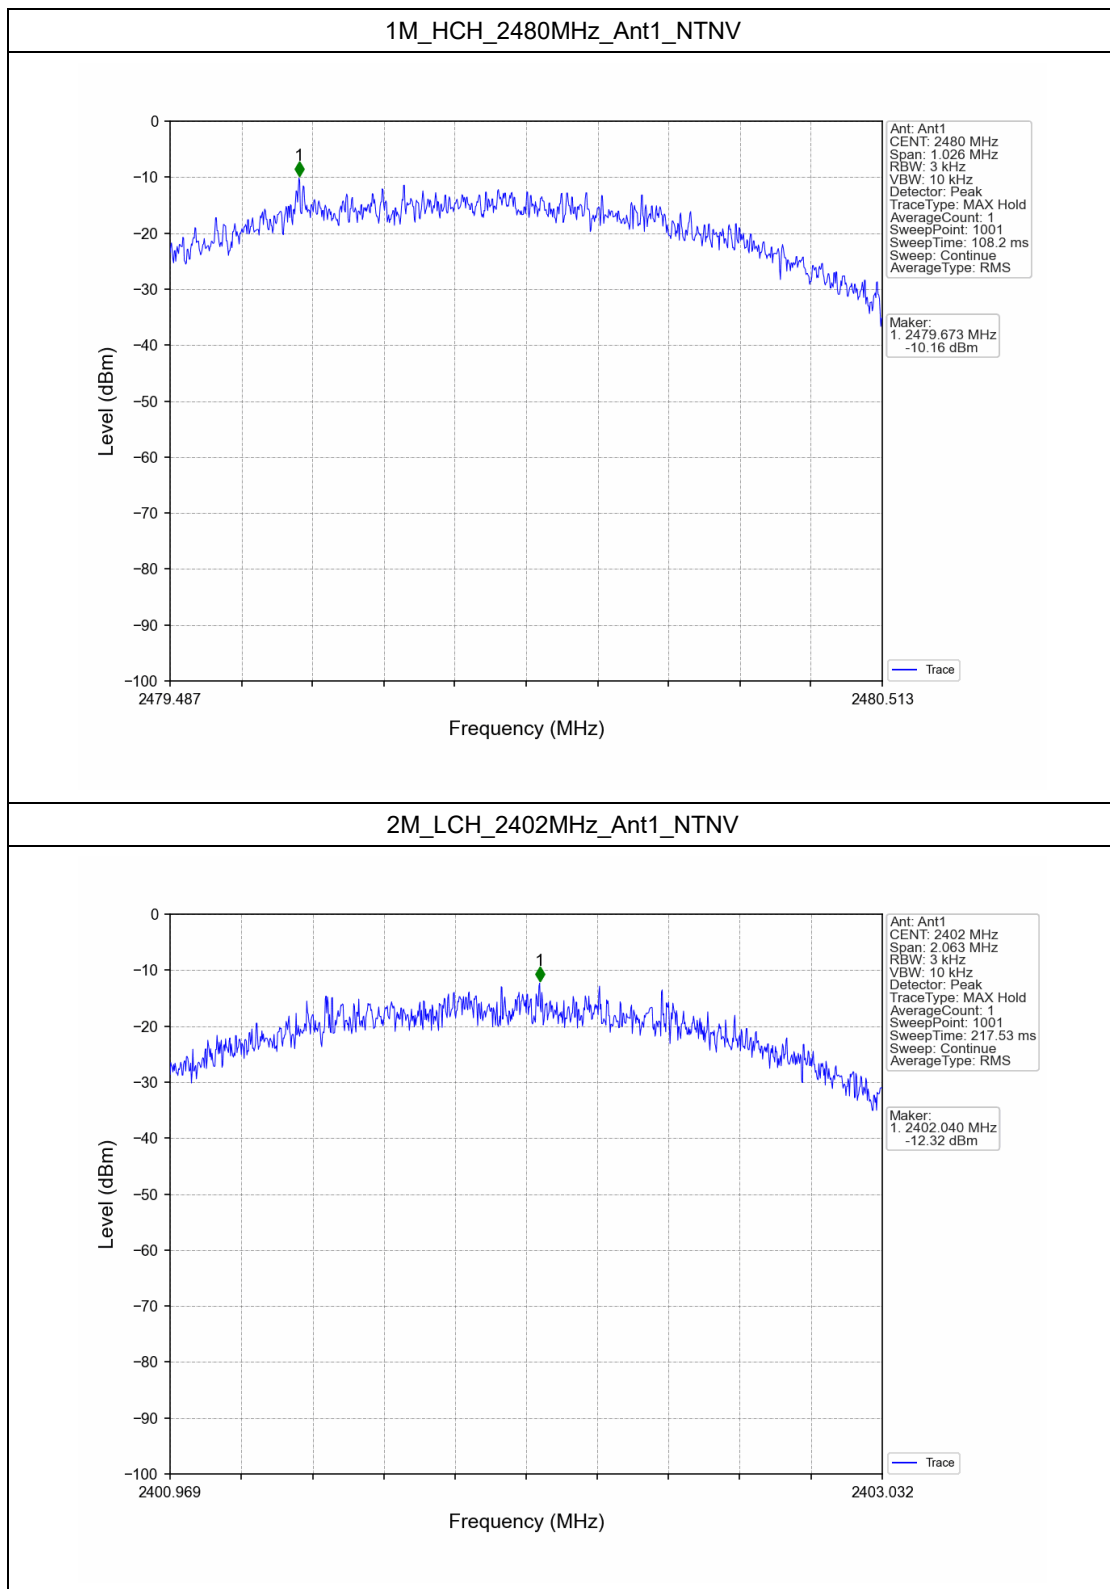

2M_MCH_2440MHz_Ant1_NTNV

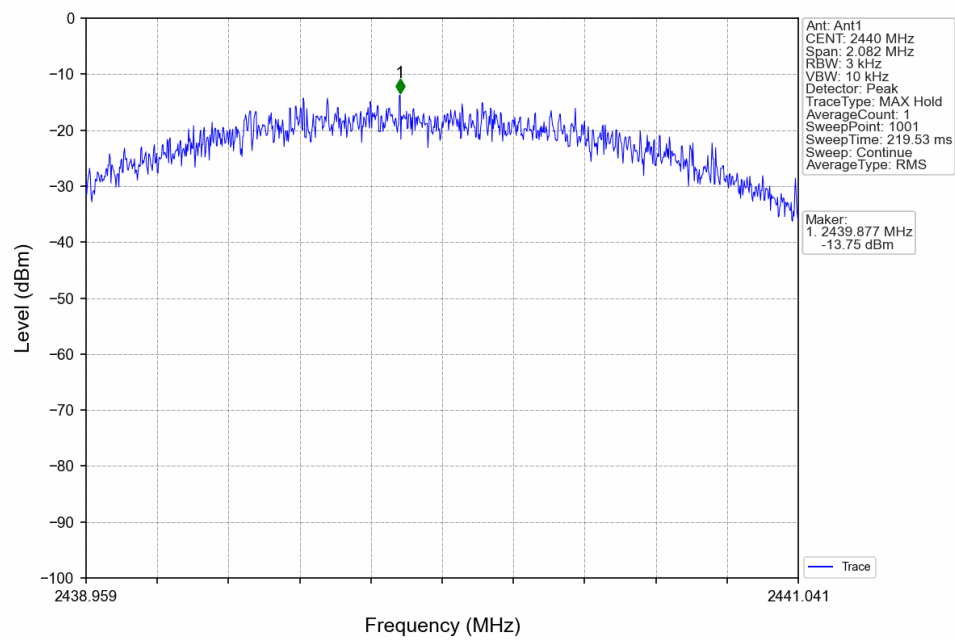

2M_HCH_2480MHz_Ant1_NTNV

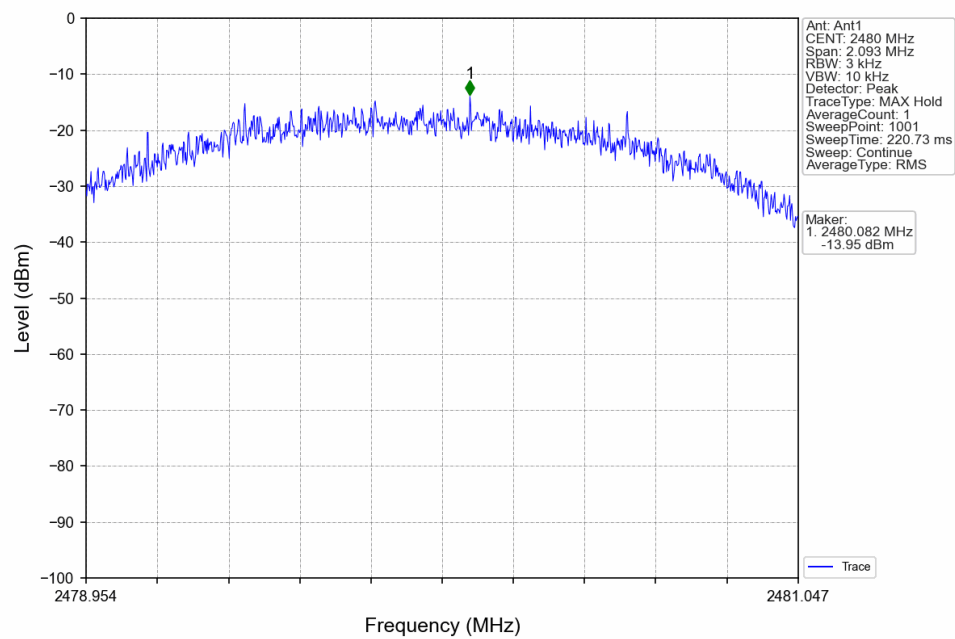

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	0.77
		2440	1	-0.24
		2480	1	-0.83
2M	SISO	2402	1	-0.45
		2440	1	-1.94
		2480	1	-2.39
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				

5.1.2 CSE


Mode	Tx Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	0.77	-19.23	Pass
		2440	1	0.77	-19.23	Pass
		2480	1	0.77	-19.23	Pass
2M	SISO	2402	1	-0.45	-20.45	Pass
		2440	1	-0.45	-20.45	Pass
		2480	1	-0.45	-20.45	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						

5.2 Test Graph


5.2.1 Ref

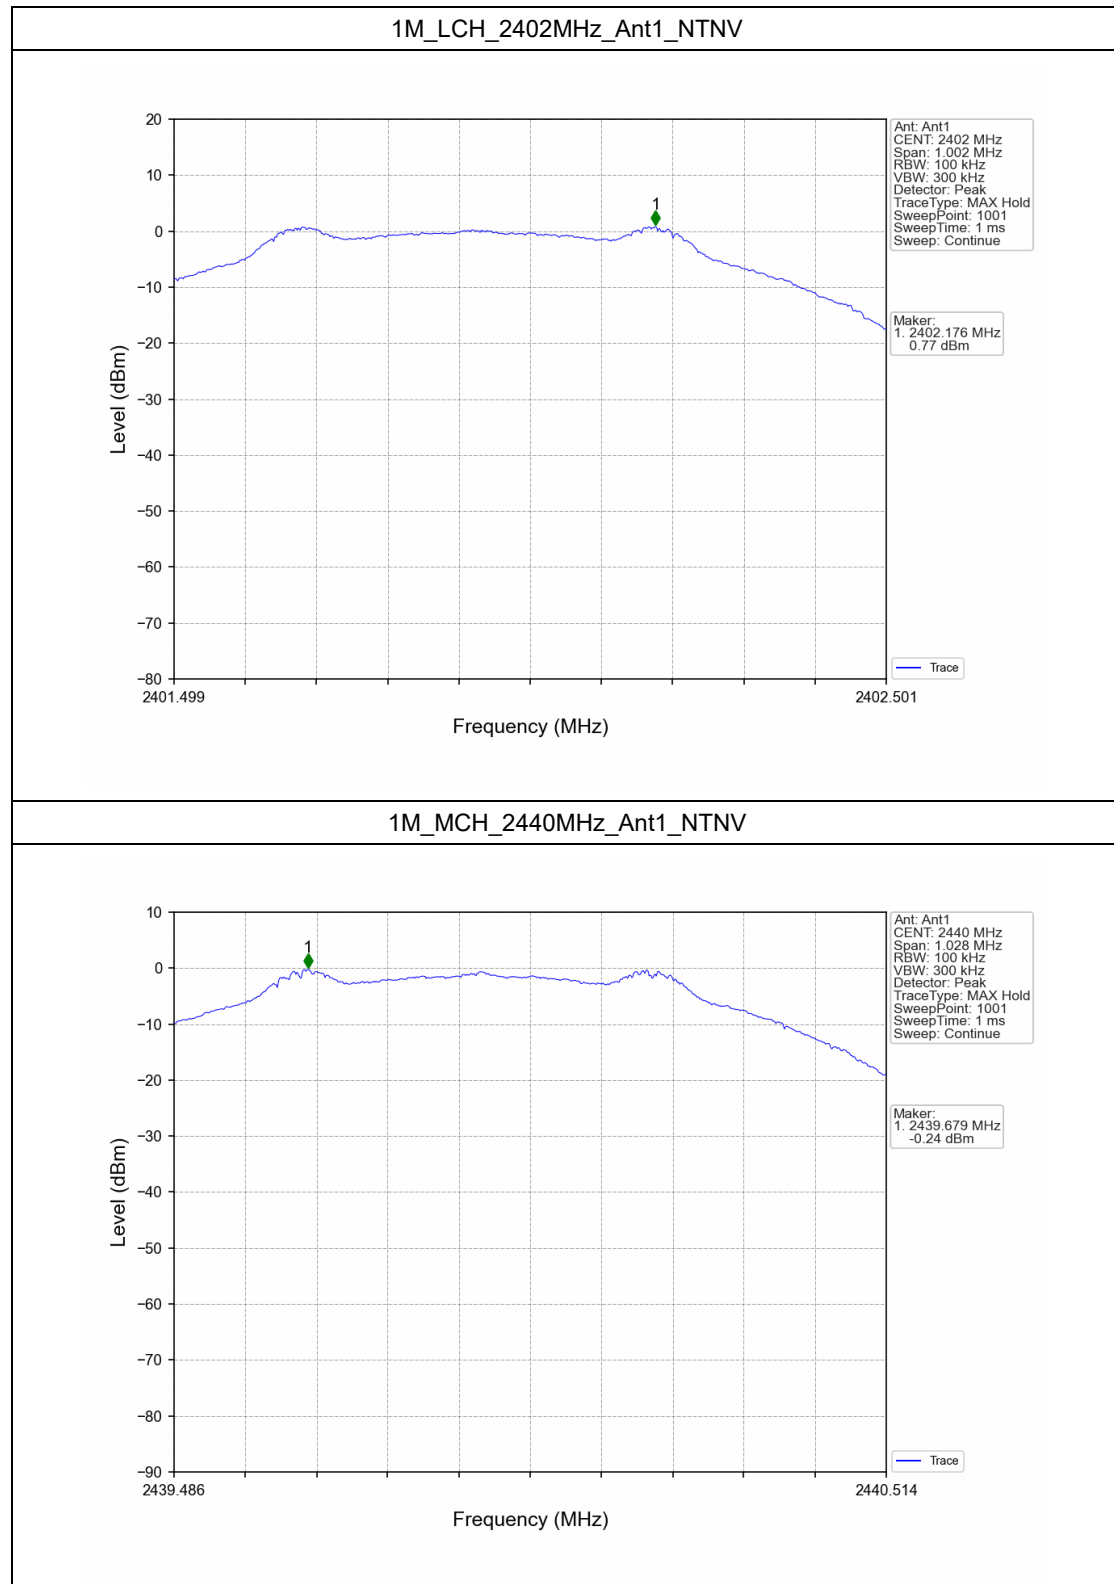


1M_HCH_2480MHz_Ant1_NTNV

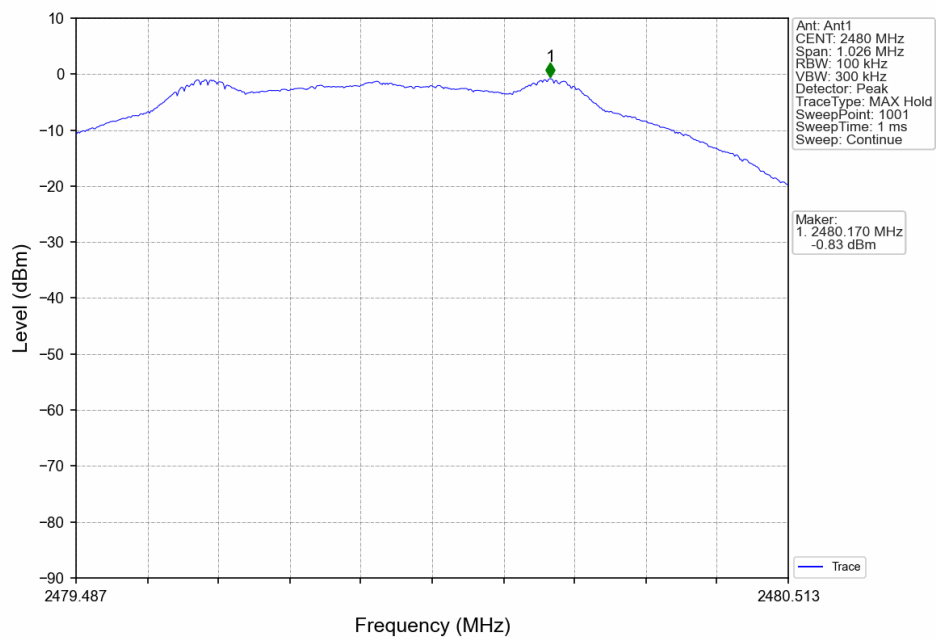


2M_LCH_2402MHz_Ant1_NTNV

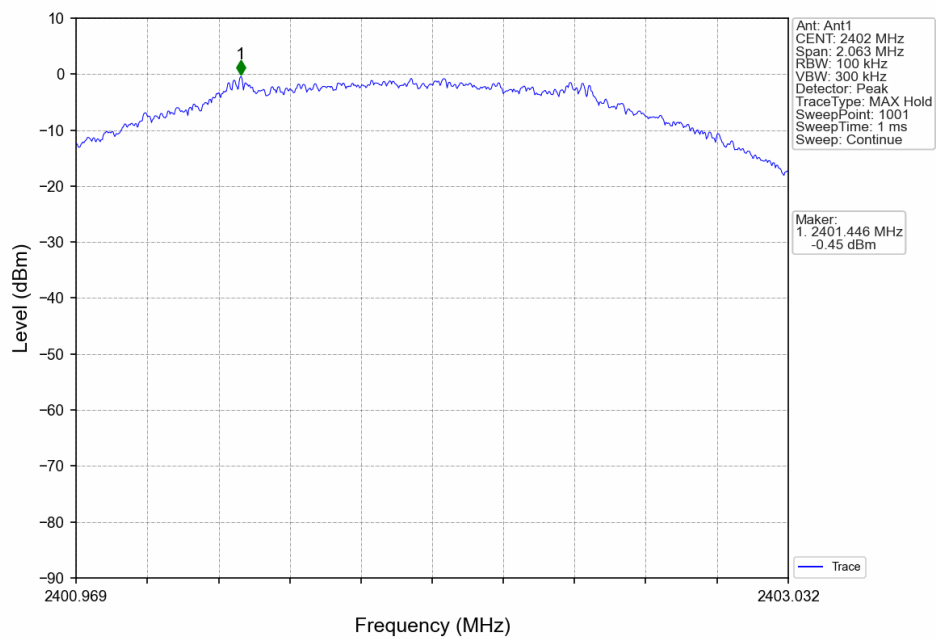


2M_MCH_2440MHz_Ant1_NTNV

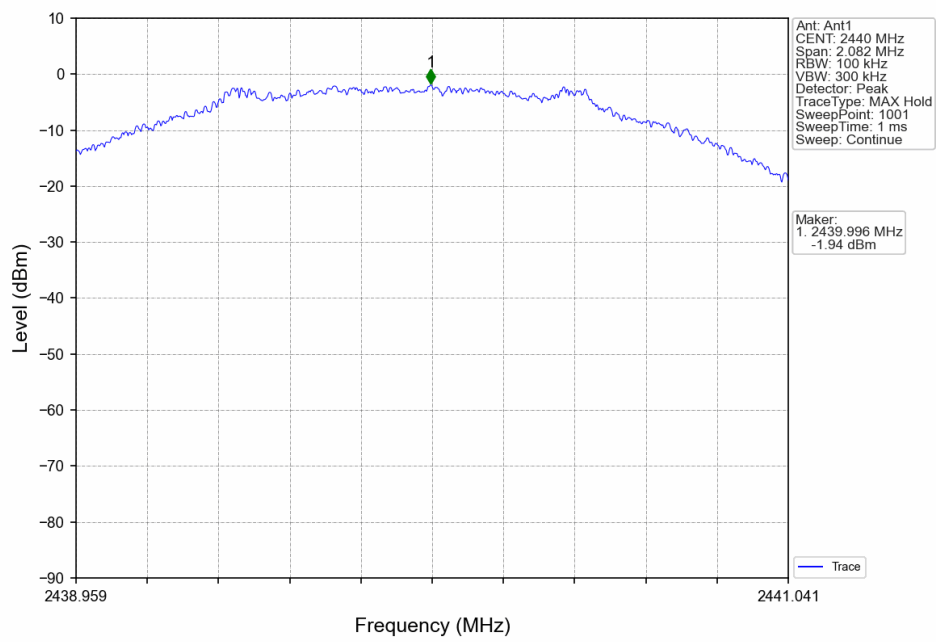


2M_HCH_2480MHz_Ant1_NTNV

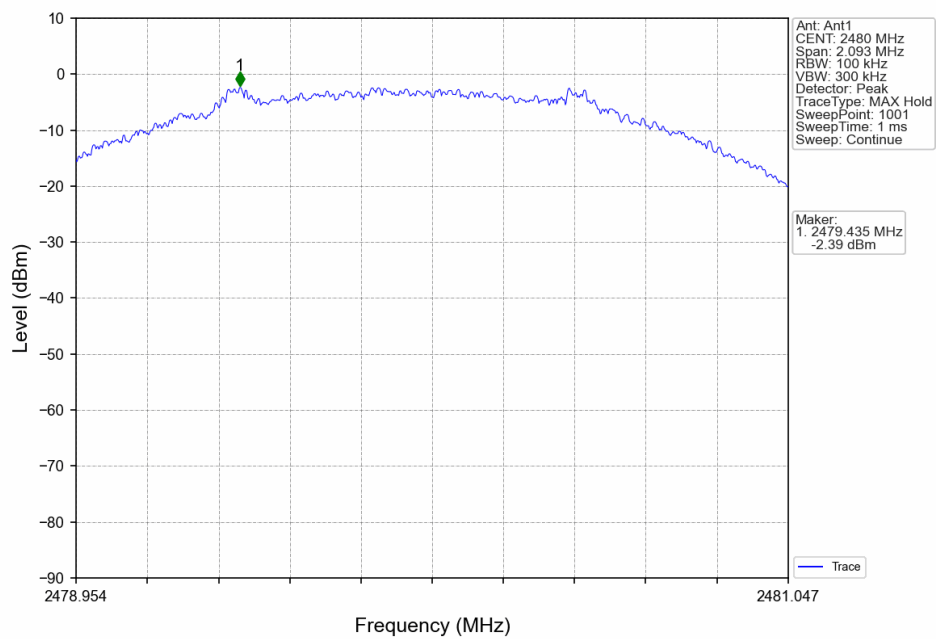


5.2.2 CSE

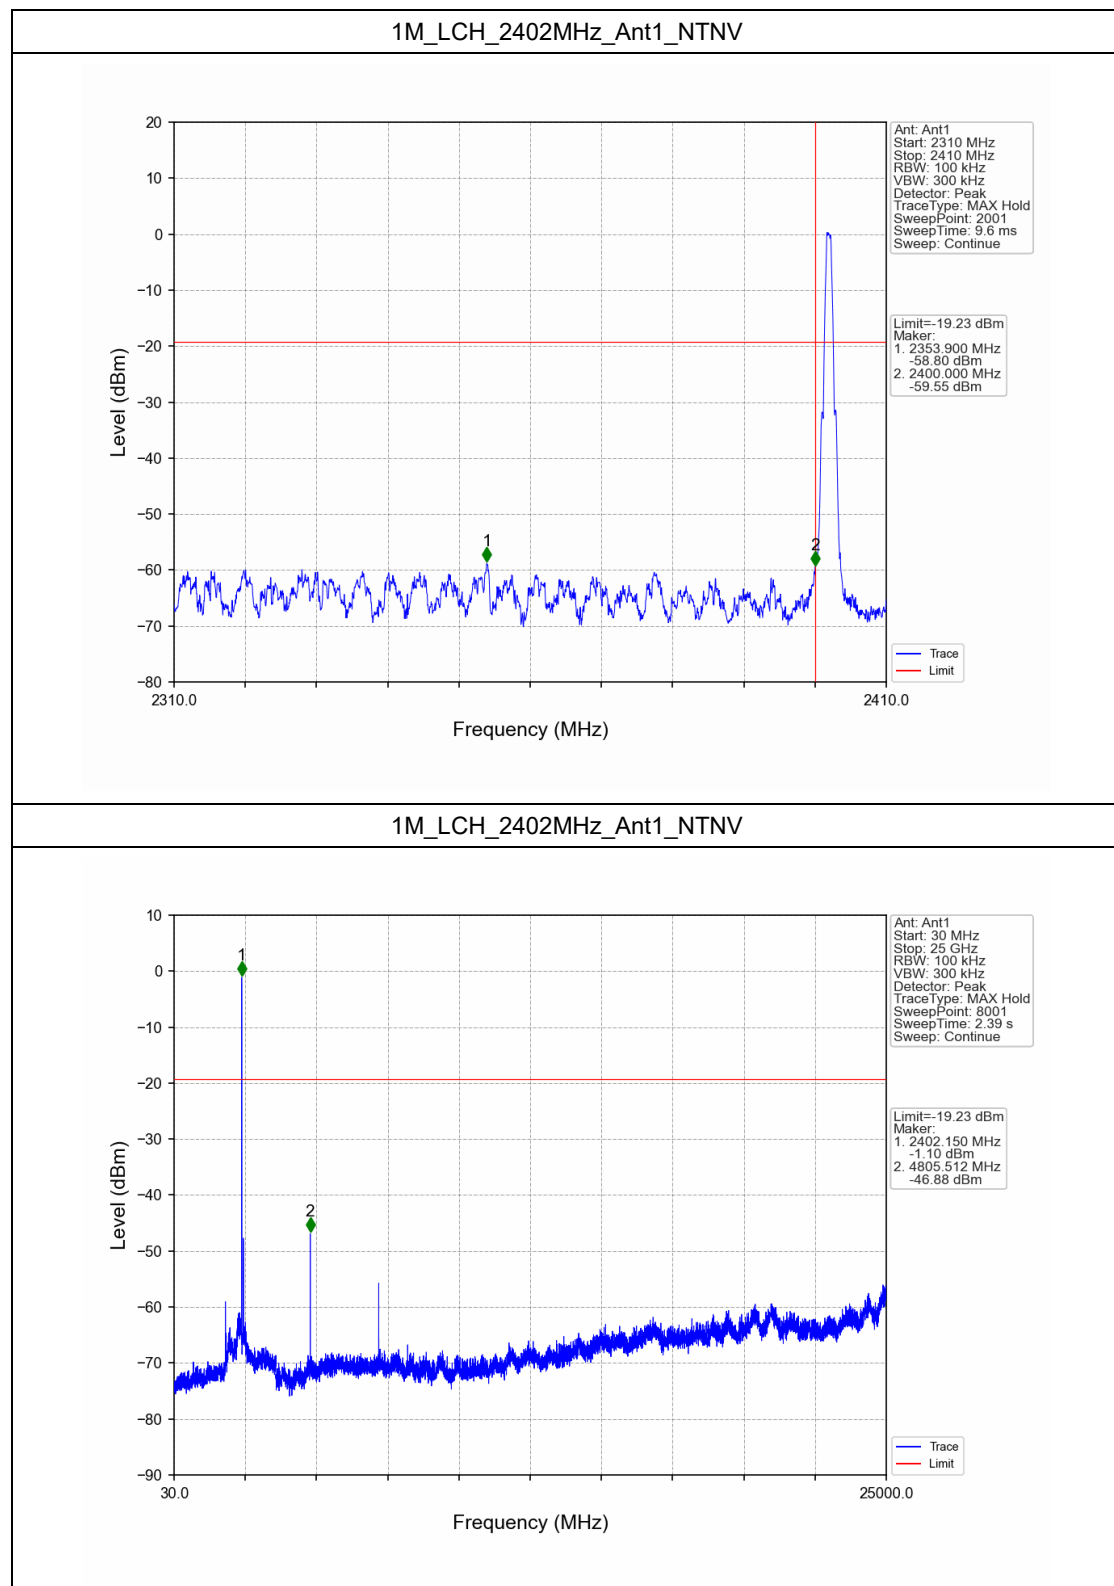


1M_MCH_2440MHz_Ant1_NTNV

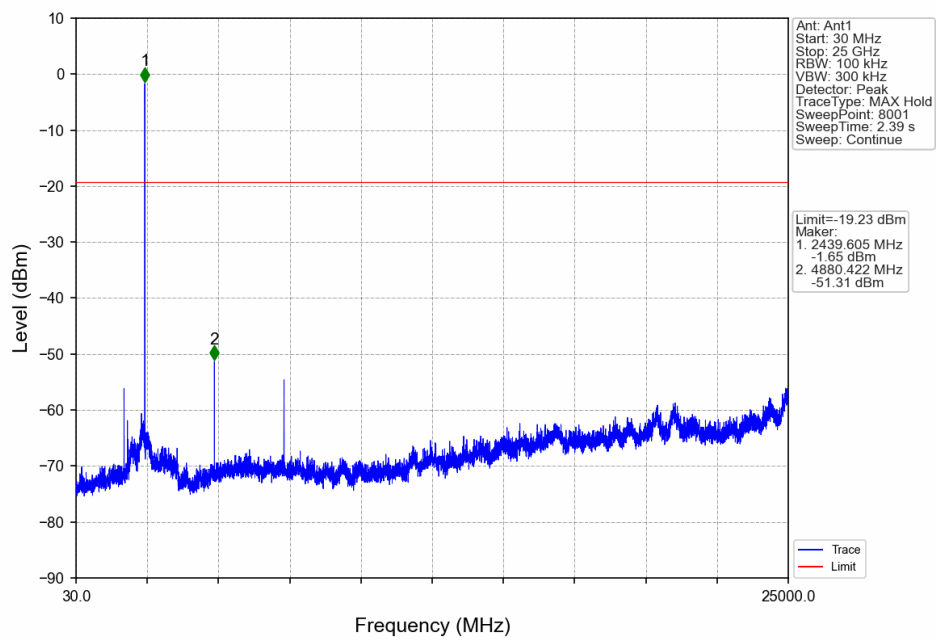


1M_HCH_2480MHz_Ant1_NTNV

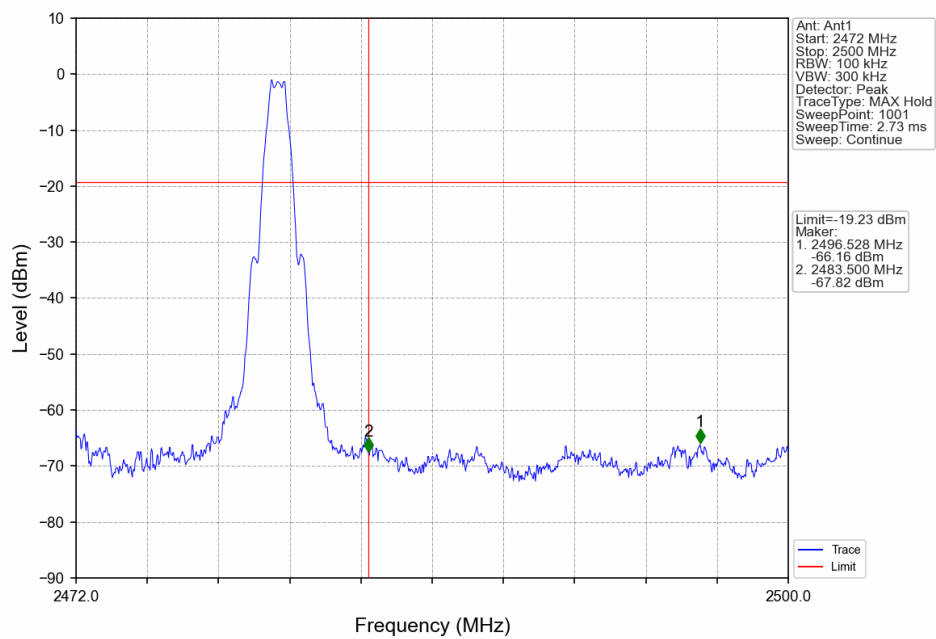


1M_HCH_2480MHz_Ant1_NTNV

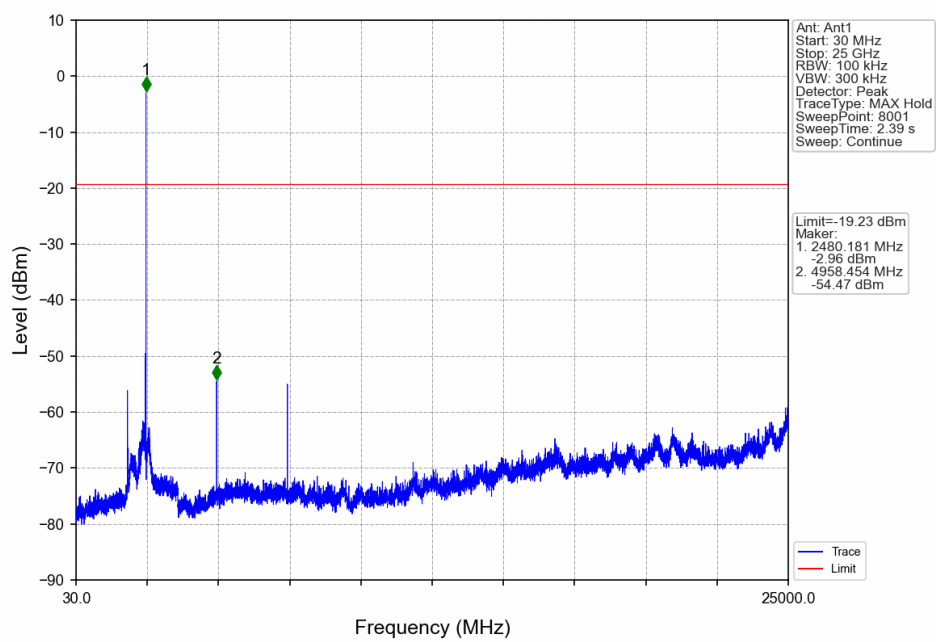


2M_LCH_2402MHz_Ant1_NTNV

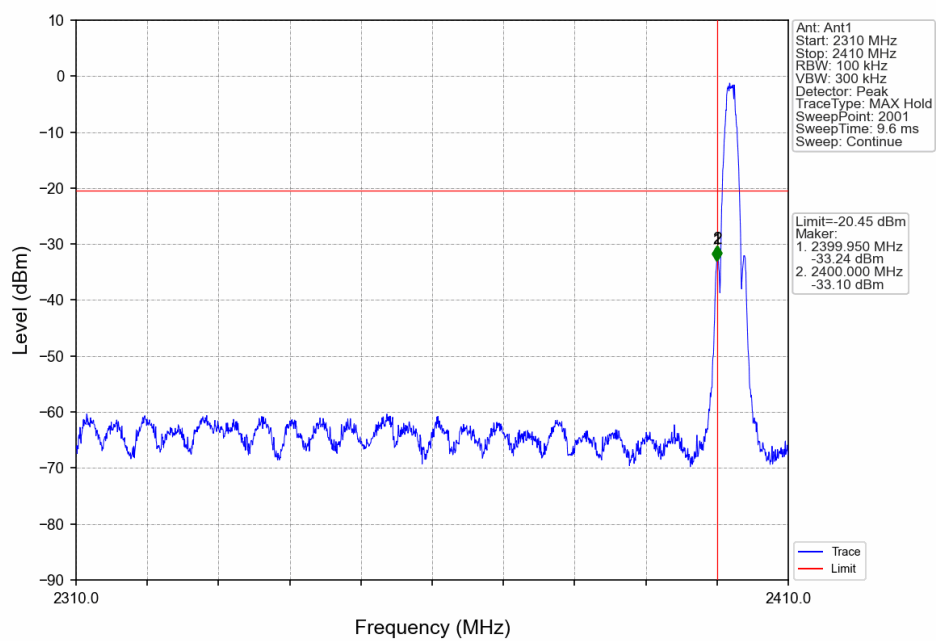


2M_LCH_2402MHz_Ant1_NTNV

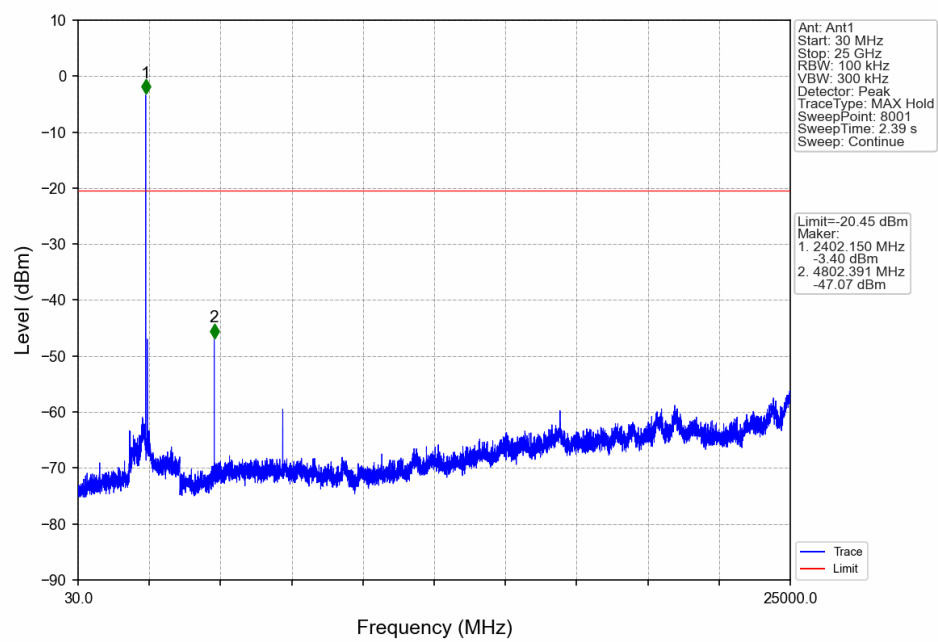


2M_MCH_2440MHz_Ant1_NTNV

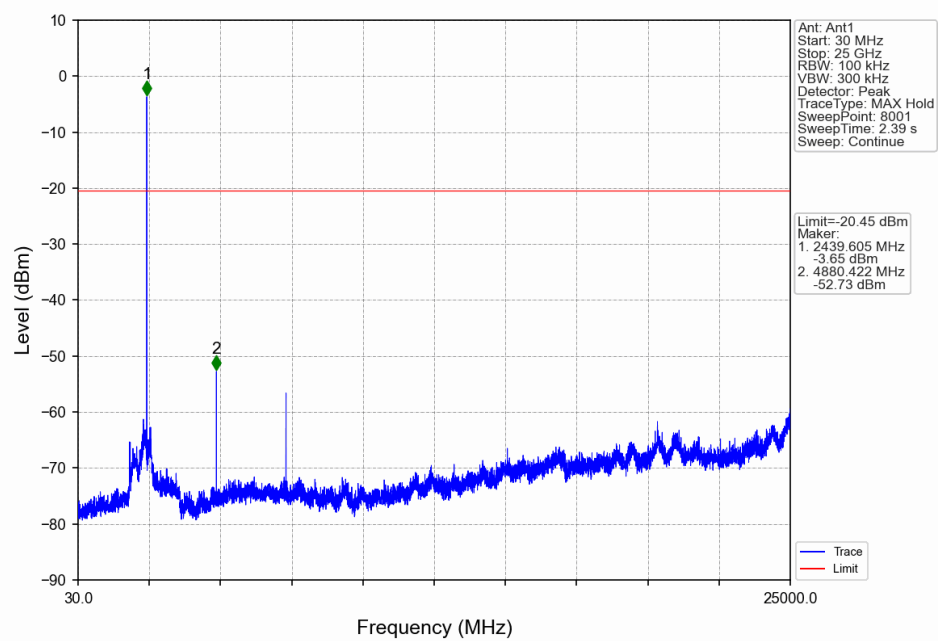

2M_HCH_2480MHz_Ant1_NTNV

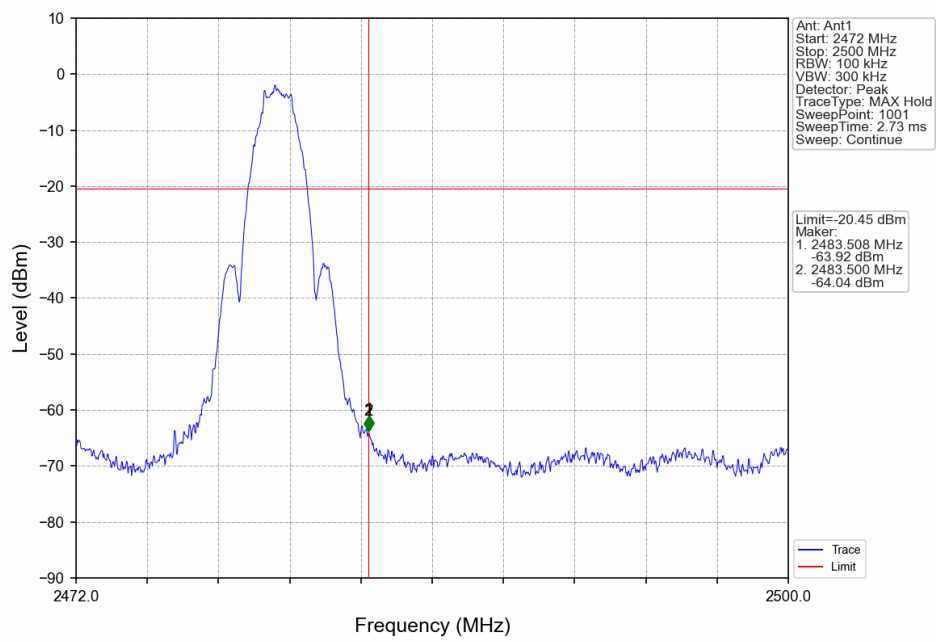

2M_HCH_2480MHz_Ant1_NTNV

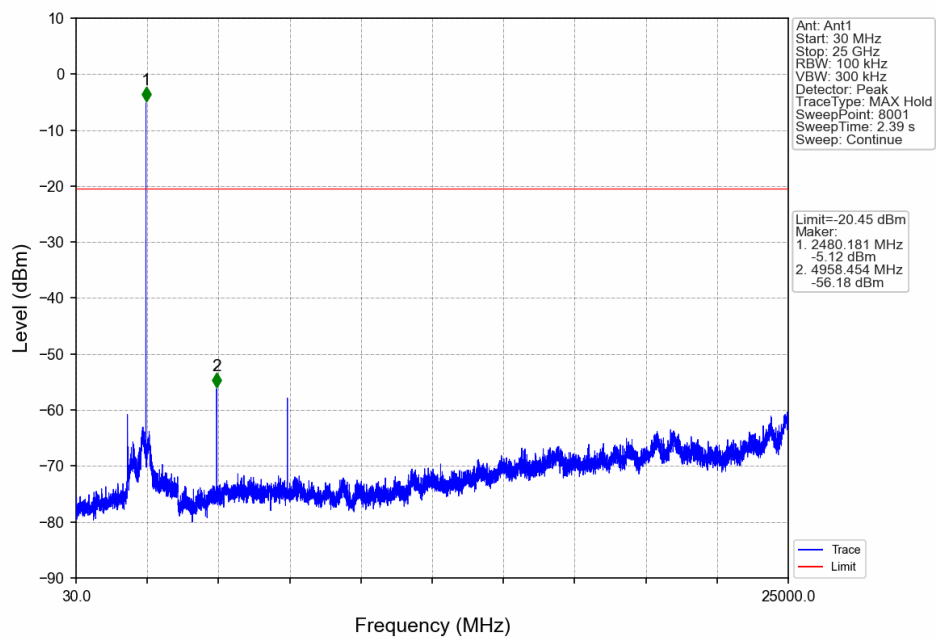

6. Form731

6.1 Test Result

6.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0013	1.05