



SAR TEST REPORT

Applicant: Shenzhen Tanding Technology Co., Ltd.

Address: Rm 2728, Pengrunda COMM Plaza, No.3368 Houbin Rd. Yuehai St., Nanshan Dist., Shenzhen, Guangdong, China

FCC ID: 2BHVO-PH-001

Product Name: LTE MiFi Router

Standard(s): 47 CFR Part 2(2.1093)

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: 2403V84480E-SA

Date Of Issue: 2024/09/15

Reviewed By: Ken Zong *Ken Zong*

Title: SAR Engineer

Approved By: Karl Gong *Karl Gong*

Title: SAR Engineer

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China
Tel: +86-769-82016888

SAR TEST RESULTS SUMMARY

Operation Frequency Bands	Highest Reported 1g SAR (W/kg)		Limits (W/kg)
	Body SAR		
LTE Band 2	0.49		1.6
LTE Band 5	0.27		
LTE Band 12	0.33		
LTE Band 66	0.56		

Maximum Simultaneous Transmission SAR			
Items	Body SAR	Hotspot	Limits
Sum SAR(W/kg)	0.76	0.76	1.6
SPLSR	N/A	N/A	0.04
EUT Received Date:	2024/07/08		
Tested Date:	2024/08/22 ~ 2024/08/23		
Tested Result:	Pass		

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

SAR TEST RESULTS SUMMARY.....	2
TEST FACILITY	3
DECLARATIONS.....	3
DOCUMENT REVISION HISTORY	6
1. GENERAL INFORMATION	7
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	7
1.2 TEST SPECIFICATION, METHODS AND PROCEDURES	8
1.3 SAR LIMITS.....	9
2. SAR MEASUREMENT SYSTEM	10
3. EQUIPMENT LIST AND CALIBRATION	17
3.1 EQUIPMENTS LIST & CALIBRATION INFORMATION	17
4. SAR MEASUREMENT SYSTEM VERIFICATION	18
4.1 LIQUID VERIFICATION	18
4.2 SYSTEM ACCURACY VERIFICATION	20
4.3 SAR SYSTEM VALIDATION DATA.....	21
5. EUT TEST STRATEGY AND METHODOLOGY	25
5.1 TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	25
5.2 TEST DISTANCE FOR SAR EVALUATION.....	25
5.3 SAR EVALUATION PROCEDURE	26
6. CONDUCTED OUTPUT POWER MEASUREMENT	27
6.1 TEST PROCEDURE.....	27
6.2 DESCRIPTION OF TEST CONFIGURATION.....	28
6.3 MAXIMUM TARGET OUTPUT POWER.....	29
6.4 TEST RESULTS:	30
7. Standalone SAR test exclusion considerations	39
7.1 ANTENNA DISTANCE TO EDGE	39
7.2 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	39
7.3 STANDALONE SAR ESTIMATION:	40
7.4 SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT	40
8. SAR MEASUREMENT RESULTS	41
8.1 SAR TEST DATA	41

9. Measurement Variability	46
10. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	47
11. SAR Plots	48
APPENDIX A MEASUREMENT UNCERTAINTY	49
APPENDIX B EUT TEST POSITION PHOTOS	51
APPENDIX C CALIBRATION CERTIFICATES	52

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2403V84480E-SA	Original Report	2024/09/15

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	LTE MiFi Router
EUT Model:	R1878
Brand:	PHILIPS
Device Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	None
Operation modes:	FDD-LTE and WLAN
Frequency Band:	LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 12: 699-716 MHz(TX); 729-746 MHz(RX) LTE Band 66: 1710-1780 MHz(TX); 2110-2200 MHz(RX) WLAN 2.4G : 2412 MHz-2462 MHz/2422-2452 MHz(TX/RX)
Conducted RF Power:	LTE Band 2: 23.31 dBm LTE Band 5: 24.36 dBm LTE Band 12: 24.22 dBm LTE Band 66: 22.99 dBm WLAN 2.4G: 9.77 dBm
Dimensions (L*W*H):	105mm (L)*62mm (W) *8mm (H)
Rated Input Voltage:	DC 3.8 V from Rechargeable Battery
Serial Number:	2O0R-1
Normal Operation:	Body

1.2 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528-2013, the following FCC Published RF exposure KDB procedures:

KDB 447498 D01 General RF Exposure Guidance v06
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02 RF Exposure Reporting v01r02
KDB 941225 D05 SAR for LTE Devices v02r05
KDB 941225 D06 Hotspot Mode v02r01

TCB Workshop April 2019: RF Exposure Procedures

1.3 SAR Limits

FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg for 1g SAR applied to the EUT.


2. SAR MEASUREMENT SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

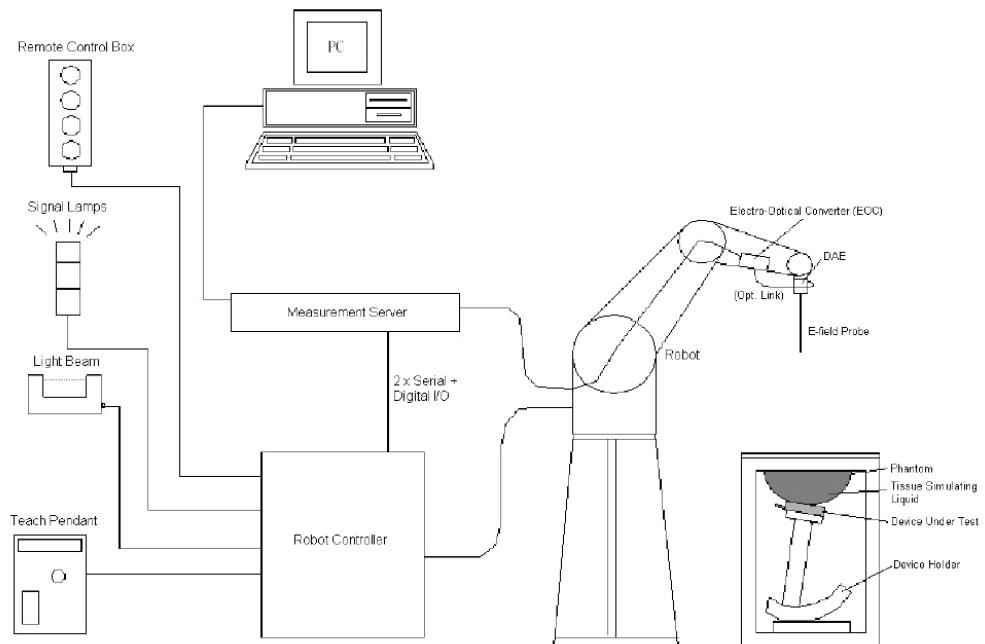

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

Calibration Frequency Points for EX3DV4 E-Field Probes SN: 7329 Calibrated: 2024/3/27

Calibration Frequency Point(MHz)	Frequency Range(MHz)		Conversion Factor		
	From	To	X	Y	Z
750 Head	650	810	8.79	10.07	9.05
900 Head	810	1000	8.42	9.50	8.93
1750 Head	1650	1810	7.56	8.56	7.71
1900 Head	1810	2000	7.37	8.32	7.54
2300 Head	2200	2399	7.21	8.13	7.41
2450 Head	2399	2500	7.05	7.92	7.22
2600 Head	2500	2700	6.91	7.77	7.08
5250 Head	5140	5360	4.96	5.61	5.16
5600 Head	5490	5675	4.38	4.98	4.56
5750 Head	5675	5860	4.54	5.16	4.70

SAM Twin Phantom


The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

- Left Head
- Right Head
- Flat phantom

The phantom table for the DASY systems based on the robots have the size of 100 x 50 x 85 cm (L x W x H). For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

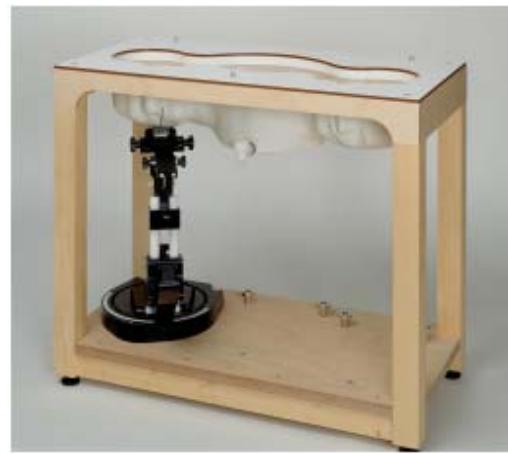

Robots

The DASY5 system uses the high precision industrial robot. The robot offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head liquid

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
750	41,9	0,89
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
1 500	40,4	1,23
1 640	40,2	1,31
1 750	40,1	1,37
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
2 100	39,8	1,49
2 300	39,5	1,67
2 450	39,2	1,80
2 600	39,0	1,96
3 000	38,5	2,40
3 500	37,9	2,91
4 000	37,4	3,43
4 500	36,8	3,94
5 000	36,2	4,45
5 200	36,0	4,66
5 400	35,8	4,86
5 600	35,5	5,07
5 800	35,3	5,27
6 000	35,1	5,48

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.


3. EQUIPMENT LIST AND CALIBRATION

3.1 Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52.10	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 4.5.12	1567	NCR	NCR
Data Acquisition Electronics	DAE4	1354	2023/11/17	2024/11/16
E-Field Probe	EX3DV4	7329	2024/3/27	2025/3/26
Mounting Device	MD4HHTV5	BJPCTC0152	NCR	NCR
Twin SAM	Twin SAM V5.0	1412	NCR	NCR
Dipole, 750 MHz	D750V3	1230	2023/3/24	2026/3/23
Dipole, 900 MHz	D900V2	1d217	2023/3/24	2026/3/23
Dipole, 1750 MHz	D1750V2	1200	2023/3/27	2026/3/26
Dipole, 1900 MHz	D1900V2	5d251	2023/3/27	2026/3/26
Simulated Tissue Liquid Head(500-9500 MHz)	HBBL600-10000V6	220420-2	Each Time	/
Network Analyzer	8753B	2828A00170	2023/10/17	2024/10/16
Dielectric assessment kit	1319	SM DAK 040 CA	NCR	NCR
MXG Vector Signal Generator	N5182B	MY51350144	2024/4/1	2025/3/31
Power Meter	E4419B	MY45103907	2023/10/18	2024/10/17
USB Power Sensor	U2001H	MY50000432	2024/4/1	2025/3/31
Power Amplifier	ZHL-5W-202-S+	416402204	NCR	NCR
Power Amplifier	ZVE-6W-83+	637202210	NCR	NCR
Directional Coupler	441493	520Z	NCR	NCR
Attenuator	20dB, 100W	LN749	NCR	NCR
Attenuator	6dB, 150W	2754	NCR	NCR
Thermometer	DTM3000	3892	2024/4/1	2025/3/31
Thermohygrometer	HTC-1	N/A	2024/4/1	2025/3/31
Radio Communication Analyzer	MT8820C	6201181458	2024/4/1	2025/3/31
Spectrum Analyzer	FSU26	100147	2024/4/1	2025/3/31

4. SAR MEASUREMENT SYSTEM VERIFICATION

4.1 Liquid Verification

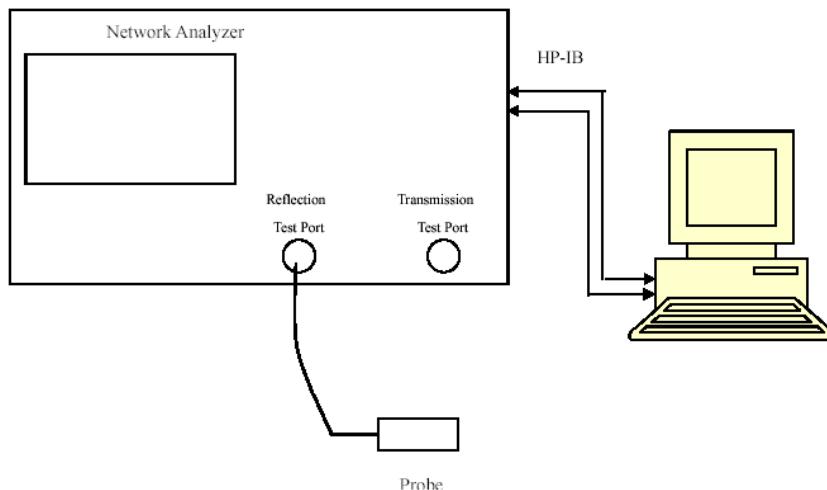

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
704	Simulated Tissue Liquid Head	43.454	0.884	42.15	0.89	3.09	-0.67	± 5
707.5	Simulated Tissue Liquid Head	43.409	0.886	42.13	0.89	3.04	-0.45	± 5
711	Simulated Tissue Liquid Head	43.364	0.889	42.11	0.89	2.98	-0.11	± 5
750	Simulated Tissue Liquid Head	42.877	0.914	41.9	0.89	2.33	2.7	± 5

*Liquid Verification above was performed on 2024/08/23.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
829	Simulated Tissue Liquid Head	41.883	0.915	41.53	0.9	0.85	1.67	± 5
836.5	Simulated Tissue Liquid Head	41.79	0.922	41.5	0.9	0.7	2.44	± 5
844	Simulated Tissue Liquid Head	41.689	0.938	41.5	0.91	0.46	3.08	± 5
900	Simulated Tissue Liquid Head	41.266	0.942	41.5	0.9	-0.56	4.67	± 5

*Liquid Verification above was performed on 2024/08/23.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1717.5	Simulated Tissue Liquid Head	39.189	1.333	40.13	1.35	-2.34	-1.26	± 5
1745	Simulated Tissue Liquid Head	39.079	1.36	40.1	1.37	-2.55	-0.73	± 5
1750	Simulated Tissue Liquid Head	39.058	1.365	40.1	1.37	-2.6	-0.36	± 5
1772.5	Simulated Tissue Liquid Head	38.961	1.387	40.06	1.38	-2.74	0.51	± 5

*Liquid Verification above was performed on 2024/08/23.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1860	Simulated Tissue Liquid Head	40.749	1.385	40	1.4	1.87	-1.07	± 5
1880	Simulated Tissue Liquid Head	40.715	1.397	40	1.4	1.79	-0.21	± 5
1900	Simulated Tissue Liquid Head	40.685	1.409	40	1.4	1.71	0.64	± 5

*Liquid Verification above was performed on 2024/08/22.


4.2 System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- a) $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1 \text{ 000 MHz}$;
- b) $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1 \text{ 000 MHz} < f \leq 3 \text{ 000 MHz}$;
- c) $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3 \text{ 000 MHz} < f \leq 6 \text{ 000 MHz}$.

System Verification Setup Block Diagram

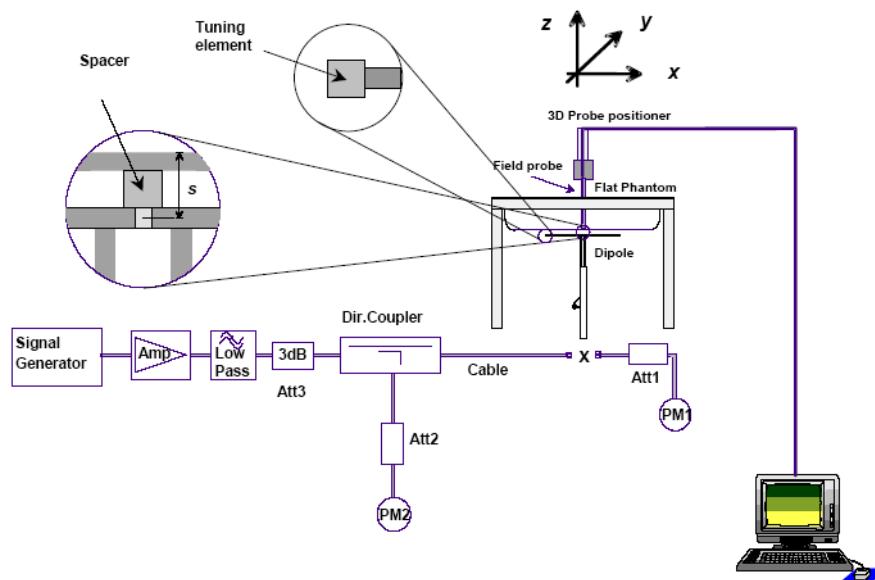

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2024/08/23	750 MHz	Simulated Tissue Liquid Head	100	1g	0.896	8.96	8.49	5.54	± 10
2024/08/23	900 MHz	Simulated Tissue Liquid Head	100	1g	1.12	11.2	10.9	2.75	± 10
2024/08/23	1750 MHz	Simulated Tissue Liquid Head	100	1g	3.57	35.7	35.8	-0.28	± 10
2024/08/22	1900 MHz	Simulated Tissue Liquid Head	100	1g	3.71	37.1	38.9	-4.63	± 10

*The SAR values above are normalized to 1 Watt forward power.

4.3 SAR SYSTEM VALIDATION DATA

System Performance 750 MHz Head was performed on 2024/08/23

DUT: D750V3; Type: 750 MHz; Serial: 1230

Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.877$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05)@ 750 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan(7x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.981 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.62 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.896 W/kg; SAR(10 g) = 0.582 W/kg

Maximum value of SAR (measured) = 0.965 W/kg

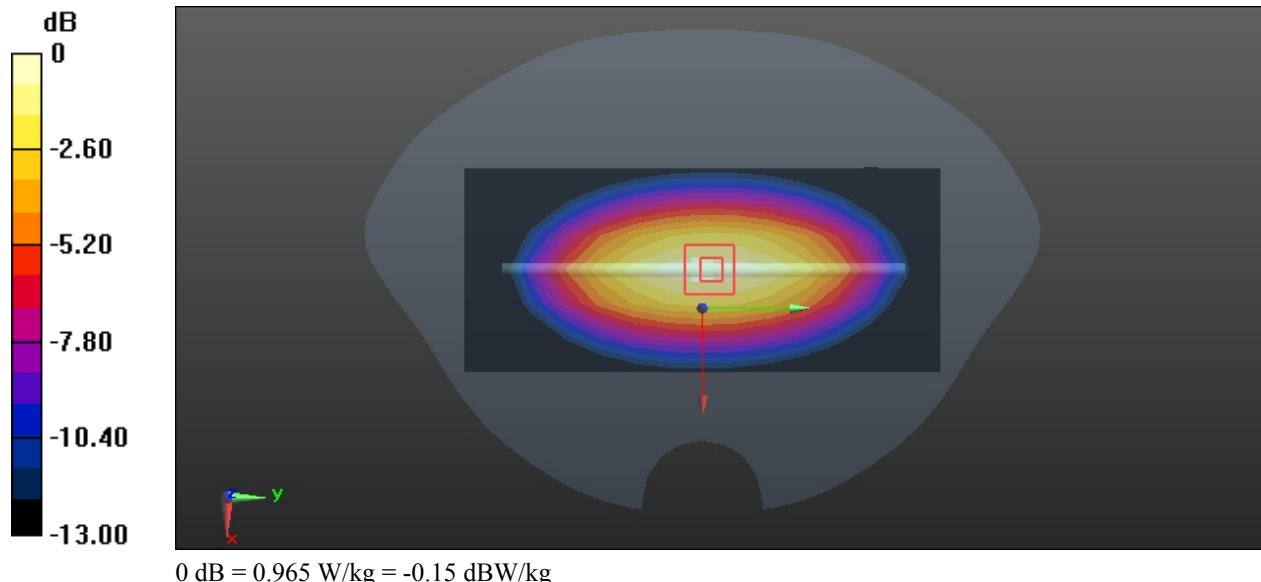

System Performance 900 MHz Head was performed on 2024/08/23

DUT: D900V2; Type: 900 MHz; Serial: 1d217

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 900$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 41.266$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93)@ 900 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.41 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.97 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.744 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

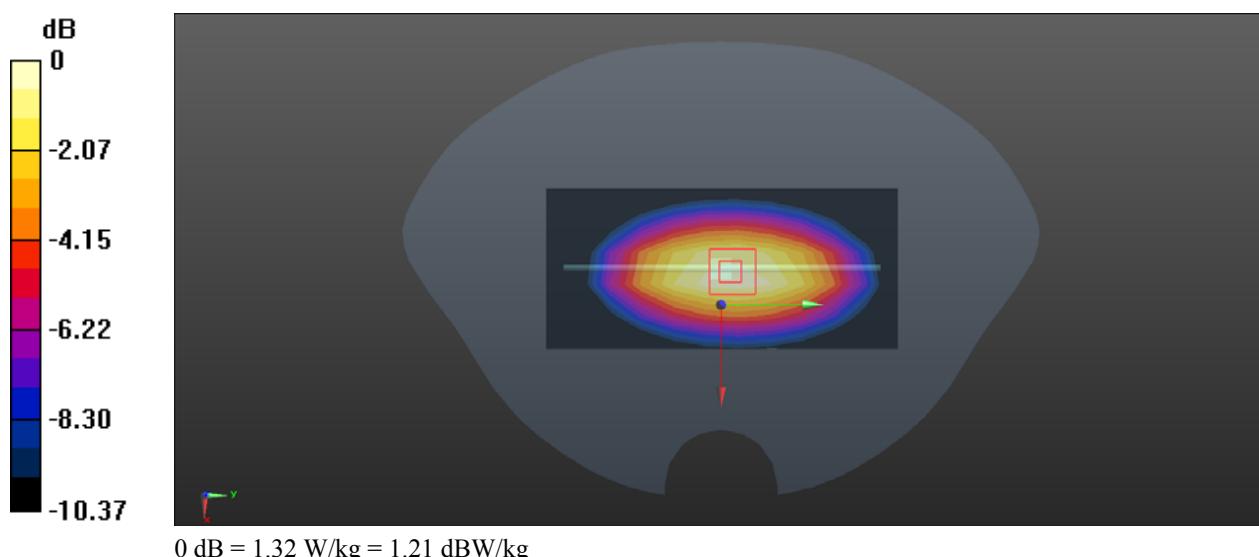

System Performance 1750MHz Head was performed on 2024/08/23

DUT: D1900V2; Type: 1750 MHz; Serial: 1200

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 39.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71)@ 1750 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan(5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.48 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.02 V/m; Power Drift = 0.15dB

Peak SAR (extrapolated) = 6.32 W/kg

SAR(1 g) = 3.57 W/kg; SAR(10 g) = 1.93 W/kg

Maximum value of SAR (measured) = 4.39 W/kg

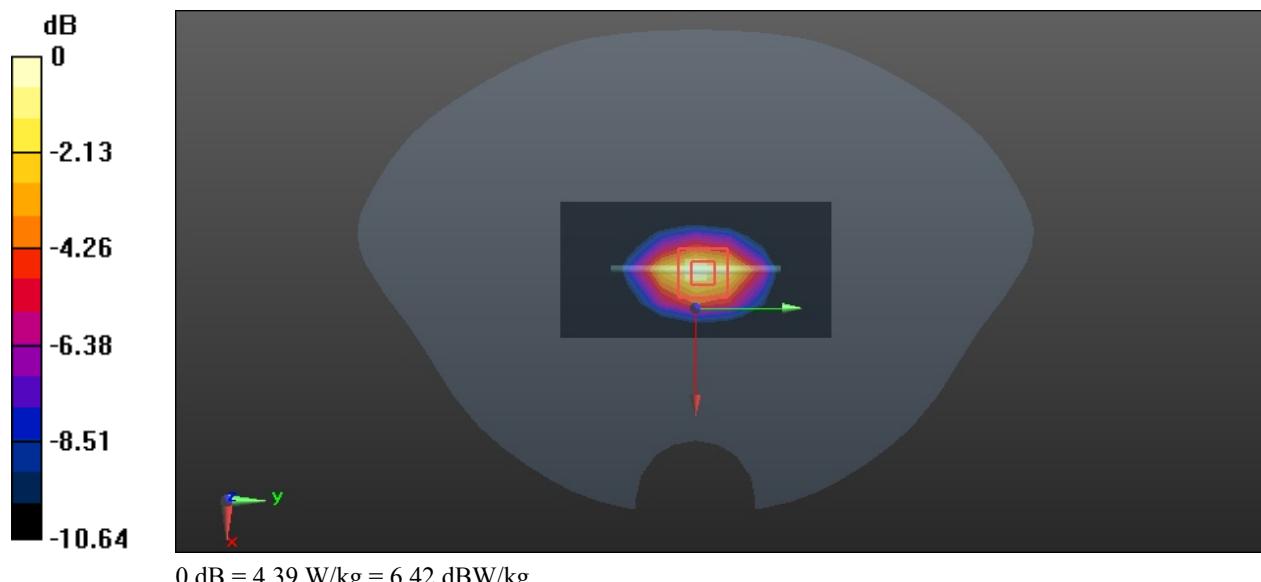

System Performance 1900MHz Head was performed on 2024/08/22

DUT: D1900V2; Type: 1900 MHz; Serial: 5d251

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.685$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54)@ 1900 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan(7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.34 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.66 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 6.35 W/kg

SAR(1 g) = 3.71 W/kg; SAR(10 g) = 1.97 W/kg

Maximum value of SAR (measured) = 4.56 W/kg

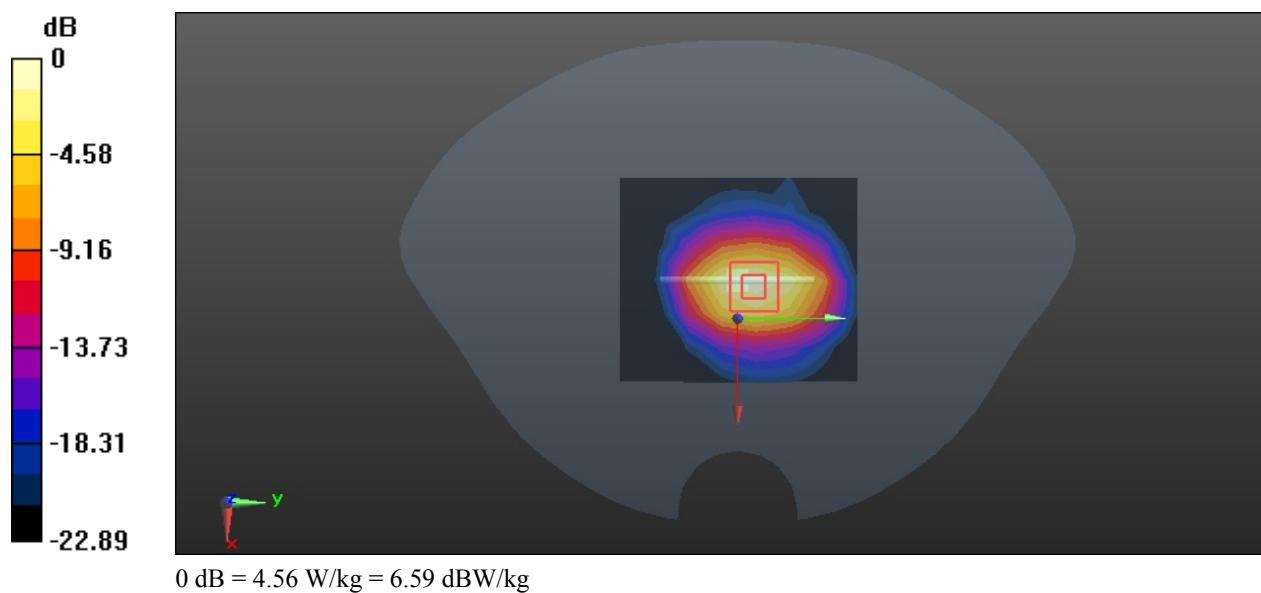

5. EUT TEST STRATEGY AND METHODOLOGY

5.1 Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

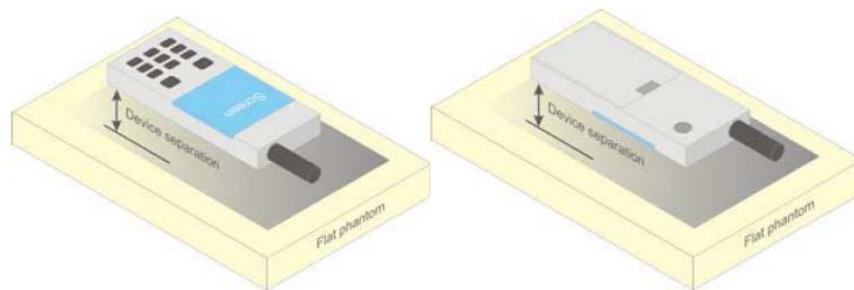


Figure 5 – Test positions for body-worn devices

5.2 Test Distance for SAR Evaluation

In this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

5.3 SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


6. CONDUCTED OUTPUT POWER MEASUREMENT

6.1 Test Procedure

The RF output of the transmitter was connected to the input of the Wireless Communication Test Set through Connector.

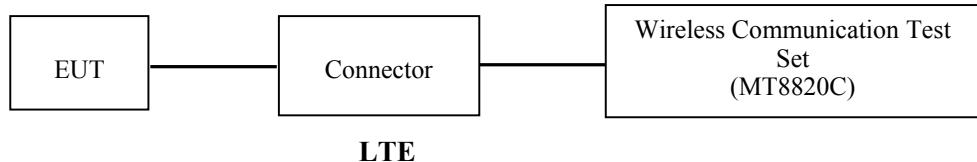

The RF output of the transmitter was connected to the input port of the USB Power Sensor through Connector.

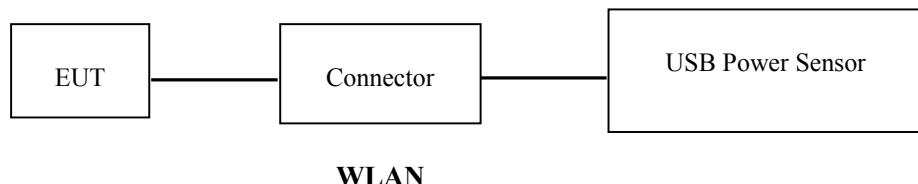

6.2 Description of Test Configuration

EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No

The maximum power was configured per 3GPP Standard for each operation modes as below setting:

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	*	*	*	*	*

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

6.3 Maximum Target Output Power

Mode/Band	Max Target Power(dBm)		
	Low	Middle	High
LTE Band 2	23.5	23.5	23.5
LTE Band 5	24.5	24.5	24.5
LTE Band 12	24.5	24.5	24.5
LTE Band 66	23	23	23
WLAN 2.4G(802.11b)	9.5	8	9.8
WLAN 2.4G(802.11g)	9.8	9.8	9.8
WLAN 2.4G(802.11n ht20)	9.5	9	9
WLAN 2.4G(802.11n ht40)	9	9	9
WLAN 2.4G(802.11ax20)	9.8	8	9.8
WLAN 2.4G(802.11ax40)	9.5	9	9.5

Note: The Maximum Target Power for LTE bands corresponds to their maximum power in QPSK modes with maximum bandwidth.

6.4 Test Results:**LTE Band 2:**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	20.88	22.10	21.01
		1@3	21.35	21.88	20.87
		1@5	21.52	21.92	21.21
		3@0	19.24	21.85	21.18
		3@1	21.56	21.70	21.23
		3@3	21.44	21.87	21.12
		6@0	20.71	21.33	20.73
	16-QAM	1@0	20.40	21.42	20.48
		1@3	20.49	21.29	20.54
		1@5	20.65	21.47	20.20
		3@0	20.48	21.08	20.78
		3@1	20.51	21.11	20.72
		3@3	20.91	21.05	20.68
		6@0	20.14	20.48	19.99
3M	QPSK	1@0	21.68	22.16	22.14
		1@8	22.26	21.98	21.49
		1@14	21.48	21.56	21.13
		8@0	20.84	21.18	20.65
		8@4	20.81	21.29	20.87
		8@7	20.93	21.15	20.70
		15@0	21.19	21.24	20.62
	16-QAM	1@0	20.85	21.62	21.14
		1@8	21.25	21.35	20.79
		1@14	20.73	21.15	20.56
		8@0	20.12	20.50	20.05
		8@4	20.17	20.65	20.46
		8@7	20.46	20.76	20.25
		15@0	20.67	20.63	19.97
5M	QPSK	1@0	21.50	21.62	22.20
		1@12	21.58	21.74	21.30
		1@24	22.21	21.75	21.23
		12@0	20.82	21.42	21.45
		12@7	21.79	21.33	20.74
		12@13	21.28	21.10	20.89
		25@0	21.26	21.23	21.08
	16-QAM	1@0	20.85	21.13	21.69
		1@12	20.94	21.18	20.93
		1@24	21.66	21.26	20.57
		12@0	20.29	20.71	20.67
		12@7	20.94	20.46	20.17
		12@13	20.54	20.46	20.35

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		25@0	20.53	20.49	20.21
10M	QPSK	1@0	22.00	22.04	23.07
		1@25	21.86	21.28	22.02
		1@49	23.31	22.16	21.45
		25@0	21.16	20.79	21.63
		25@12	21.67	20.95	21.74
		25@25	21.79	21.08	20.99
		50@0	21.49	20.90	21.71
	16-QAM	1@0	20.61	21.46	22.39
		1@25	20.89	20.64	21.50
		1@49	21.95	21.65	20.60
		25@0	20.39	20.04	21.06
		25@12	20.98	20.35	21.01
		25@25	20.86	20.38	20.19
		50@0	20.82	20.20	21.06
15M	QPSK	1@0	21.60	21.74	23.07
		1@37	21.85	21.08	21.99
		1@74	22.61	21.78	21.29
		36@0	21.15	20.63	21.63
		36@20	21.49	20.72	21.54
		36@39	22.05	20.92	21.20
		75@0	21.34	20.82	21.42
	16-QAM	1@0	20.83	21.47	22.29
		1@37	21.17	20.59	21.23
		1@74	21.97	21.21	20.28
		36@0	20.49	20.06	21.15
		36@20	20.87	19.90	20.95
		36@39	20.93	20.19	20.52
		75@0	20.69	20.20	20.68
20M	QPSK	1@0	21.98	21.88	21.79
		1@49	23.08	23.17	22.82
		1@99	21.63	21.54	21.79
		50@0	22.74	22.92	22.57
		50@24	21.77	21.76	21.53
		50@50	21.84	21.73	21.73
		100@0	21.67	21.61	21.51
	16-QAM	1@0	22.25	21.81	21.79
		1@49	21.61	21.87	21.76
		1@99	21.87	21.99	21.55
		50@0	21.92	21.66	21.59
		50@24	21.86	21.79	21.64
		50@50	21.75	21.74	21.86
		100@0	22.07	21.72	21.75

LTE Band 5:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	23.85	23.27	23.74
		1@3	23.79	23.31	23.62
		1@5	23.86	23.46	23.48
		3@0	23.61	23.55	23.51
		3@1	23.54	23.32	23.39
		3@3	23.38	23.34	23.36
		6@0	23.17	22.73	22.82
	16-QAM	1@0	23.15	22.80	23.12
		1@3	22.97	22.80	23.00
		1@5	23.00	22.82	22.89
		3@0	23.06	22.68	22.88
		3@1	22.83	22.82	22.67
		3@3	22.80	22.99	22.67
		6@0	22.48	22.20	22.21
3M	QPSK	1@0	24.20	23.76	24.02
		1@8	24.22	23.63	23.54
		1@14	23.45	23.12	23.20
		8@0	23.13	22.97	23.03
		8@4	23.04	23.17	23.31
		8@7	23.30	21.77	23.18
		15@0	23.16	22.99	21.76
	16-QAM	1@0	23.19	23.19	22.29
		1@8	23.54	23.07	22.95
		1@14	23.06	22.64	22.66
		8@0	22.30	22.27	22.29
		8@4	22.31	20.92	22.66
		8@7	22.69	22.39	22.45
		15@0	22.31	22.31	22.45
5M	QPSK	1@0	23.74	23.93	23.78
		1@12	23.46	23.30	23.46
		1@24	23.66	23.59	23.35
		12@0	23.31	23.13	23.39
		12@7	23.40	23.14	23.12
		12@13	23.20	22.84	23.26
		25@0	23.41	23.20	23.25
	16-QAM	1@0	22.12	23.21	23.46
		1@12	23.22	22.72	23.14
		1@24	23.36	23.13	22.91
		12@0	22.31	22.44	22.53
		12@7	22.52	22.33	22.42
		12@13	22.45	22.23	22.38

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	25@0	22.70	22.44	22.43
		1@0	22.72	24.12	24.36
		1@25	22.72	22.83	23.48
		1@49	23.07	24.1	23.61
		25@0	22.5	22.76	23.04
		25@12	23.76	24.04	23.81
		25@25	23.05	22.82	22.94
	16-QAM	50@0	22.82	22.94	23.01
		1@0	23.31	22.98	23.26
		1@25	22.65	22.79	22.8
		1@49	23.62	23.88	23.13
		25@0	23.13	22.84	22.72
		25@12	23.21	22.93	22.89
		25@25	22.83	22.78	23.22
		50@0	22.6	22.79	22.91

LTE Band 12:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	24.22	22.87	23.81
		1@3	23.68	22.80	23.54
		1@5	23.79	23.27	23.65
		3@0	23.76	22.94	23.46
		3@1	23.67	22.98	23.57
		3@3	23.72	23.04	22.30
		6@0	23.26	22.43	22.86
	16-QAM	1@0	23.09	22.16	22.92
		1@3	23.13	22.23	22.46
		1@5	23.04	22.42	23.03
		3@0	23.09	22.10	22.85
		3@1	23.22	22.32	21.77
		3@3	23.21	22.66	22.72
		6@0	22.31	20.40	22.14
3M	QPSK	1@0	24.08	23.61	24.13
		1@8	23.62	23.37	23.71
		1@14	23.62	22.67	23.43
		8@0	23.09	22.36	23.01
		8@4	23.20	22.62	23.22
		8@7	22.03	22.50	22.96
		15@0	23.09	22.89	23.11
	16-QAM	1@0	23.22	23.06	23.55
		1@8	23.21	23.08	22.58
		1@14	22.63	22.44	22.58
		8@0	22.27	21.78	22.37
		8@4	22.49	21.86	22.36
		8@7	22.21	21.95	22.36
		15@0	22.21	22.16	22.21
5M	QPSK	1@0	23.78	22.99	23.46
		1@12	23.14	22.54	23.34
		1@24	23.06	23.04	23.45
		12@0	23.14	22.84	23.22
		12@7	22.71	22.54	23.04
		12@13	22.79	22.53	23.06
		25@0	23.12	22.52	22.96
	16-QAM	1@0	22.97	22.70	23.34
		1@12	22.64	22.25	22.90
		1@24	22.29	22.73	22.98
		12@0	22.43	22.05	22.42
		12@7	20.39	21.89	22.43
		12@13	22.04	21.68	22.35

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	25@0	22.24	21.64	22.22
		1@0	24.2	22.91	23.58
		1@25	22.75	22.64	22.97
		1@49	23.35	23.7	24.03
		25@0	22.99	23.29	22.84
		25@12	22.71	22.67	22.71
		25@25	22.67	22.69	22.87
	16-QAM	50@0	22.54	22.77	22.6
		1@0	23.56	22.86	23.07
		1@25	22.59	22.52	22.86
		1@49	22.98	23.25	23.27
		25@0	22.99	22.78	22.75
		25@12	22.61	22.65	22.63
		25@25	23.13	22.79	22.81
		50@0	22.98	22.85	22.52

LTE Band 66:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1@0	22.06	21.40	21.33
		1@3	22.39	21.27	21.13
		1@5	22.39	21.72	21.19
		3@0	22.44	21.28	21.07
		3@1	22.27	21.39	20.99
		3@3	22.23	21.22	21.25
		6@0	21.64	20.73	20.70
	16-QAM	1@0	21.78	20.72	20.72
		1@3	21.51	20.89	20.67
		1@5	21.77	21.18	20.66
		3@0	21.63	20.63	20.35
		3@1	21.21	20.69	20.50
		3@3	21.41	20.68	20.51
		6@0	21.16	20.03	20.23
3M	QPSK	1@0	22.58	21.52	21.52
		1@8	22.84	21.72	21.29
		1@14	22.28	21.20	20.83
		8@0	21.57	20.93	20.59
		8@4	21.70	20.86	20.60
		8@7	21.73	20.77	20.43
		15@0	21.90	20.98	20.52
	16-QAM	1@0	22.00	21.29	21.45
		1@8	22.15	21.24	20.96
		1@14	21.43	20.58	20.63
		8@0	20.86	20.21	19.99
		8@4	21.12	20.15	20.05
		8@7	21.34	20.04	19.88
		15@0	21.23	20.09	19.97
5M	QPSK	1@0	22.33	21.28	21.27
		1@12	22.20	21.08	20.92
		1@24	22.44	21.55	21.16
		12@0	21.56	20.61	20.60
		12@7	21.92	20.82	20.48
		12@13	21.75	20.61	20.49
		25@0	21.78	20.88	20.96
	16-QAM	1@0	21.79	20.66	20.92
		1@12	21.79	20.49	20.46
		1@24	21.87	21.07	20.78
		12@0	21.01	20.33	20.01
		12@7	21.28	20.32	19.93
		12@13	21.13	20.17	19.88


Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		25@0	21.03	20.00	20.07
10M	QPSK	1@0	22.06	21.80	22.34
		1@25	21.89	20.71	20.73
		1@49	22.99	21.88	21.45
		25@0	21.58	20.36	20.81
		25@12	21.55	20.42	20.41
		25@25	21.98	20.65	20.38
		50@0	21.74	20.55	20.80
	16-QAM	1@0	21.72	21.04	21.23
		1@25	21.60	20.08	20.69
		1@49	22.68	21.48	21.16
		25@0	20.69	19.62	20.23
		25@12	20.86	19.88	19.92
		25@25	21.04	19.87	19.75
		50@0	20.99	19.95	19.97
15M	QPSK	1@0	22.11	21.26	22.41
		1@37	21.99	20.71	21.03
		1@74	22.30	21.87	21.11
		36@0	21.42	20.06	21.13
		36@20	21.63	20.35	20.48
		36@39	21.58	20.51	20.39
		75@0	21.47	20.55	20.97
	16-QAM	1@0	21.53	20.66	21.83
		1@37	21.32	19.94	20.59
		1@74	21.91	21.17	20.42
		36@0	20.82	19.50	20.34
		36@20	20.90	19.71	20.09
		36@39	20.93	19.84	19.78
		75@0	20.89	19.58	20.15
20M	QPSK	1@0	21.37	21.18	21.83
		1@49	21.72	21.32	21.3
		1@99	22.57	22.72	22.61
		50@0	22.36	22.56	22.24
		50@24	21.22	21.93	21.67
		50@50	21.42	21.12	21.66
		100@0	21.36	21.56	21.39
	16-QAM	1@0	21.57	21.61	21.25
		1@49	21.3	21.2	21.13
		1@99	21.15	21.27	21.26
		50@0	21.22	21.14	21.21
		50@24	21.71	21.22	21.09
		50@50	21.42	21.37	21.29
		100@0	21.53	21.61	21.72

WLAN 2.4G:

Mode	Channel frequency (MHz)	Data Rate	RF Output Power (dBm)
802.11b	2412	1Mbps	9.19
	2437		7.45
	2462		9.62
802.11g	2412	6Mbps	9.77
	2437		9.45
	2462		9.44
802.11n ht20	2412	MCS0	9.11
	2437		8.72
	2462		8.84
802.11n ht40	2422	MCS0	8.83
	2437		8.63
	2452		8.63
802.11ax20	2412	MCS0	9.59
	2437		7.97
	2462		9.53
802.11ax40	2422	MCS0	9.35
	2437		8.98
	2452		9.29

7. Standalone SAR test exclusion considerations

Antennas Location:

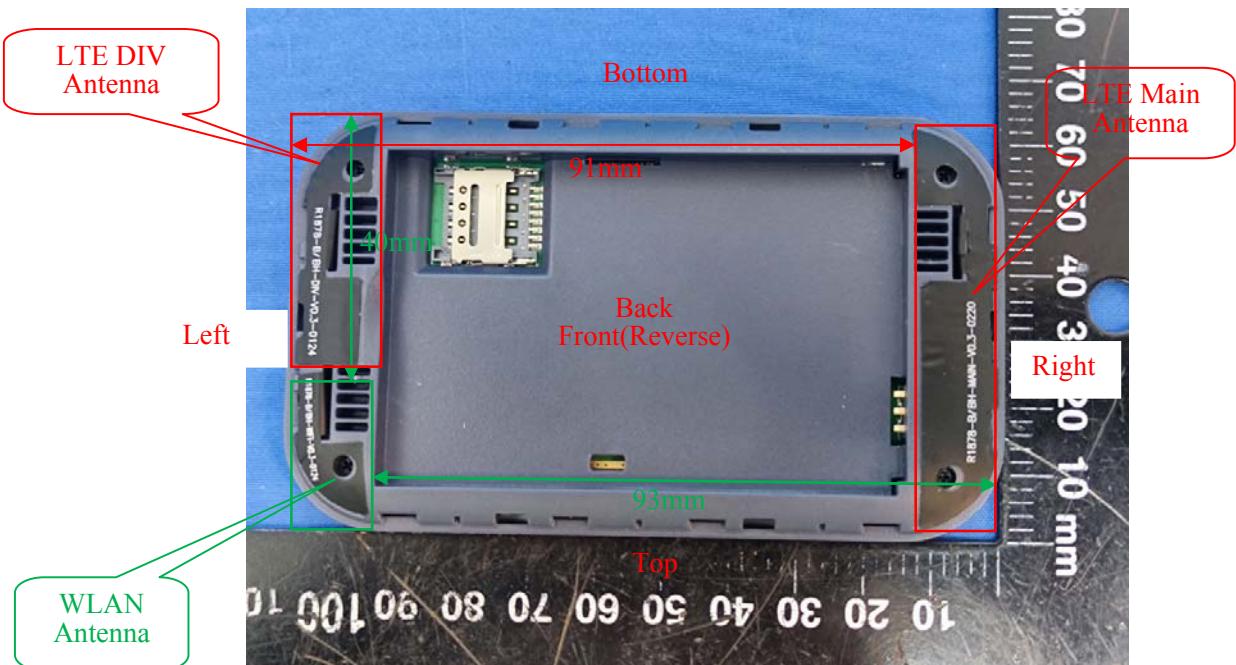

Note: The LTE DIV antenna can not transmit, and is receiving only.

7.1 Antenna Distance To Edge

Antenna Distance To Edge(mm)						
Antenna	Front	Back	Left	Right	Top	Bottom
WWAN Antenna(LTE)	< 5	< 5	91	< 5	< 5	< 5
WLAN Antenna	< 5	< 5	< 5	93	< 5	40

7.2 Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
WLAN 2.4G	2462	9.8	9.55	0	3.0	3	YES

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

7.3 Standalone SAR estimation:

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Estimated 1-g (W/kg)
WLAN 2.4G Body	2462	9.8	9.55	10	0.20

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

7.4 SAR test exclusion for the EUT edge considerations Result

Mode	Front Edge	Back Edge	Left Edge	Right Edge	Top Edge	Bottom Edge
LTE Band 2	Required	Required	Exclusion	Required	Required	Required
LTE Band 5	Required	Required	Exclusion	Required	Required	Required
LTE Band 12	Required	Required	Exclusion	Required	Required	Required
LTE Band 66	Required	Required	Exclusion	Required	Required	Required
WLAN 2.4G	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*

Note:

Required: The distance to Edge is less than 25mm, testing is required.

Exclusion: The distance to Edge is more than 25 mm, testing is not required.

Exclusion*: SAR test exclusion evaluation has been done above.

8. SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

8.1 SAR Test Data

Environmental Conditions

Temperature:	21.9-22.7 °C	22.1-22.8 °C
Relative Humidity:	39 %	46 %
ATM Pressure:	100.8 kPa	100.2 kPa
Test Date:	2024/08/23	2024/08/22

Testing was performed by Wen Chen, Leo Lu, Aixlee Li, Ken Zong.

LTE Band 2:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.17	23.5	1.079	0.452	0.49	1#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.92	23.5	1.143	0.419	0.48	/
Body Back (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.17	23.5	1.079	0.408	0.44	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.92	23.5	1.143	0.430	0.49	/
Body Right (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.17	23.5	1.079	0.316	0.34	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.92	23.5	1.143	0.298	0.34	/
Body Top (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.17	23.5	1.079	0.032	0.03	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.92	23.5	1.143	0.040	0.05	/
Body Bottom (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.17	23.5	1.079	0.142	0.15	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.92	23.5	1.143	0.123	0.14	/

LTE Band 5:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	24.12	24.5	1.091	0.249	0.27	2#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	24.04	24.5	1.112	0.188	0.21	/
Body Back (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	24.12	24.5	1.091	0.210	0.23	/
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	24.04	24.5	1.112	0.201	0.22	/
Body Right (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	24.12	24.5	1.091	0.034	0.04	/
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	24.04	24.5	1.112	0.031	0.03	/
Body Top (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	24.12	24.5	1.091	0.203	0.22	/
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	24.04	24.5	1.112	0.154	0.17	/
Body Bottom (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	24.12	24.5	1.091	0.217	0.24	/
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	24.04	24.5	1.112	0.174	0.19	/

LTE Band 12:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.7	24.5	1.202	0.187	0.22	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.29	24.5	1.321	0.155	0.20	/
Body Back (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.7	24.5	1.202	0.244	0.29	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.29	24.5	1.321	0.247	0.33	3#
Body Right (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.7	24.5	1.202	0.048	0.06	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.29	24.5	1.321	0.047	0.06	/
Body Top (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.7	24.5	1.202	0.090	0.11	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.29	24.5	1.321	0.077	0.10	/
Body Bottom (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.7	24.5	1.202	0.056	0.07	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.29	24.5	1.321	0.075	0.10	/

LTE Band 66:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	1717.5	20	1RB	/	/	/	/	/	/
	1745	20	1RB	22.72	23	1.067	0.345	0.37	/
	1772.5	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.56	23	1.107	0.338	0.37	/
Body Back (10mm)	1717.5	20	1RB	/	/	/	/	/	/
	1745	20	1RB	22.72	23	1.067	0.522	0.56	4#
	1772.5	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.56	23	1.107	0.449	0.50	/
Body Right (10mm)	1717.5	20	1RB	/	/	/	/	/	/
	1745	20	1RB	22.72	23	1.067	0.496	0.53	/
	1772.5	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.56	23	1.107	0.396	0.44	/
Body Top (10mm)	1717.5	20	1RB	/	/	/	/	/	/
	1745	20	1RB	22.72	23	1.067	0.048	0.05	/
	1772.5	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.56	23	1.107	0.040	0.04	/
Body Bottom (10mm)	1717.5	20	1RB	/	/	/	/	/	/
	1745	20	1RB	22.72	23	1.067	0.195	0.21	/
	1772.5	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.56	23	1.107	0.173	0.19	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> 0.5\text{ dB}$ higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is $> 1.45\text{ W/kg}$
4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is $< 1.45\text{ W/kg}$, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8\text{ W/kg}$.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> 0.5\text{ dB}$ higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is $> 1.45\text{ W/kg}$.

9. Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is $< 0.80 \text{ W/kg}$; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is $\geq 0.80 \text{ W/kg}$, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45 \text{ W/kg}$ ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5 \text{ W/kg}$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The Highest Measured SAR Configuration in Each Frequency Band

Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

10. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN(LTE) + WLAN 2.4G	√	√

Simultaneous SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
WWAN(LTE) + WLAN 2.4G	Body	0.56	0.20	0.76

Conclusion:

Sum of SAR: Σ SAR \leq 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

11. SAR Plots

Please Refer to the Attachment.

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/uncertainty $\pm \%$	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty $\pm \%, (1 g)$	Standard uncertainty $\pm \%, (10 g)$
Measurement system							
Probe calibration	6.55	N	1	1	1	6.3	6.3
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions – reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.1	23.7

Measurement uncertainty evaluation for IEC62209-1 SAR test

Source of uncertainty	Tolerance/uncertainty $\pm \%$	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty $\pm \%, (1 \text{ g})$	Standard uncertainty $\pm \%, (10 \text{ g})$
Measurement system							
Probe calibration	6.55	N	1	1	1	6.3	6.3
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
RF ambient conditions – reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.0	23.6

APPENDIX B EUT TEST POSITION PHOTOS

Please Refer to the Attachment.

APPENDIX C CALIBRATION CERTIFICATES

Please Refer to the Attachment.

******* END OF REPORT *******