



FCC Test Report

Application No.:	DNT2501130199R0347-00421
Applicant:	Hexgears (Shenzhen) Technology Co.,Ltd
Address of Applicant:	No. 1407, 14th Floor, Building 4, Excellence Meilin Center Plaza (North), Zhongkang Road, Meilin Street, Futian District, Shenzhen, China
EUT Description:	Keyboard
Model No.:	HK-K6
FCC ID:	2BHVQ-HK-K6
Power Supply	Input:DC 5V; DC 3.7V From Rechargeable Lithium-ion Battery
Trade Mark:	/
Standards:	47 CFR FCC Part 2, Subpart J 47 CFR Part 15, Subpart C ANSI C63.10: 2013
Date of Receipt:	2025/01/13
Date of Test:	2025/01/13 to 2025/04/05
Date of Issue:	2025/04/08
Test Result:	PASS

Prepared By: Wayne Lin (Testing Engineer)



Reviewed By: Tengils Chen (Project Engineer)

Approved By: Yense Chen (Manager)

Note: If there is any objection to the results in this report, please submit a written inquiry to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp, and is issued by the company in accordance with the requirements of the "Conditions of Issuance of Test Reports" printed in the attached page. Unless otherwise stated, the results presented in this report only apply to the samples tested this time. Partial reproduction of this report is not allowed unless approved by the company in writing.

Dongguan DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com

**Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V2.0	/	Apr.08, 2025	Valid	Original Report



1 Test Summary

Test Item	Test Requirement	Test Method	Test Result	Result
Antenna Requirement	15.203/247(b)	--	Clause 3.1	PASS
Duty Cycle	--	--	Clause 3.2	PASS
DTS (6 dB) Bandwidth	15.247 (a)(2)	ANSI C63.10: 2013	Clause 3.3	PASS
Conducted Output Power	15.247 (b)(3)	ANSI C63.10: 2013	Clause 3.4	PASS
Power Spectral Density	15.247 (e)	ANSI C63.10: 2013	Clause 3.5	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10: 2013	Clause 3.6	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10: 2013	Clause 3.7	PASS
Radiated Spurious Emissions	15.247(d);15.205/15.209	ANSI C63.10: 2013	Clause 3.8	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d);15.205/15.209	ANSI C63.10: 2013	Clause 3.9	PASS
AC Power Line Conducted Emission	15.207	ANSI C63.10: 2013	Clause 3.10	PASS

Note:

1. "N/A" denotes test is not applicable in this test report.



Contents

1 Test Summary	3
2 General Information	5
2.1 Test Location	5
2.2 General Description of EUT	5
2.3 Channel List	7
2.4 Test Environment and Mode	7
2.5 Power Setting of Test Software	7
2.6 Description of Support Units	7
2.7 Test Facility	8
2.8 Measurement Uncertainty (95% confidence levels, k=2)	8
2.9 Equipment List	9
2.10 Assistant equipment used for test	10
3 Test results and Measurement Data	11
3.1 Antenna Requirement	11
3.2 Duty Cycle	12
3.3 DTS (6 dB) Bandwidth	13
3.4 Conducted Output Power	14
3.5 Power Spectral Density	15
3.6 Band-edge for RF Conducted Emissions	16
3.7 RF Conducted Spurious Emissions	17
3.8 Radiated Spurious Emissions	18
3.9 Restricted bands around fundamental frequency	26
3.10 AC Power Line Conducted Emissions	30
4 Appendix	33
Appendix A: Duty Cycle	33
Appendix B: DTS Bandwidth	33
Appendix C: Maximum conducted output power	39
Appendix D: Maximum power spectral density	42
Appendix E: Band edge measurements	45
Appendix F: Conducted Spurious Emission	48



2 General Information

2.1 Test Location

Company:	Dongguan DN Testing Co., Ltd
Address:	No. 1, West Fourth Street, South Xingfa Road, Wusha Liwu, Chang'an Town, Dongguan City, Guangdong P.R.China
Test engineer:	Wayne Lin

2.2 General Description of EUT

Manufacturer:	Hexgears (Shenzhen) Technology Co.,Ltd
Address of Manufacturer:	No. 1407, 14th Floor, Building 4, Excellence Meilin Center Plaza (North), Zhongkang Road, Meilin Street, Futian District, Shenzhen, China
EUT Description:	Keyboard
Test Model No.:	HK-K6
Additional Model(s):	HK-K1, HK-K2, HK-K3, HK-K4, HK-K5, HK-K7, HK-K8, HK-K9, HK-K10, HK-K11, HK-K12, HK-K13, HK-K14, HK-K15, HK-K16, HK-K17, HK-K18, HK-K19, HK-K20, HK-K21, HK-K22, HK-K23, HK-K24, HK-K25, HK-K26, HK-K27, HK-K28, HK-K29, HK-K30, HK-K31, HK-K32, HK-K33, HK-K34, HK-K35, HK-K36, HK-K37, HK-K38, HK-K39, HK-K40, HK-K41, HK-K42, HK-K43, HK-K44, HK-K45, HK-K46, HK-K47, HK-K48, HK-K49, HK-K50, HK-K51, HK-K52, HK-K53, HK-K54, HK-K55, HK-K56, HK-K57, HK-K58, HK-K59, HK-K60, HK-K61, HK-K62, HK-K63, HK-K64, HK-K65, HK-K66, HK-K67, HK-K68, HK-K69, HK-K70, HK-K71, HK-K72, HK-K73, HK-K74, HK-K75, HK-K76, HK-K77, HK-K78, HK-K79, HK-K80, HK-K81, HK-K82, HK-K83, HK-K84, HK-K85, HK-K86, HK-K87, HK-K88, HK-K89, HK-K90, HK-K91, HK-K92, HK-K93, HK-K94, HK-K95, HK-K96, HK-K97, HK-K98, HK-K99, HK-K100, HK-K101, HK-K102, HK-K103, HK-K104, HK-K105, HK-K106, HK-K107, HK-K108, HK-K109, HK-K110, HK-K111, HK-K112, HK-K113, HK-K114, HK-K115, HK-K116, HK-K117, HK-K118, HK-K119, HK-K120, HK-K121, HK-K122, HK-K123, HK-K124, HK-K125, HK-K126, HK-K127, HK-K128, HK-K129, HK-K130, HK-K131, HK-K132, HK-K133, HK-K134, HK-K135, HK-K136, HK-K137, HK-K138, HK-K139, HK-K140, HK-K141, HK-K142, HK-K143, HK-K144, HK-K145, HK-K146, HK-K147, HK-K148, HK-K149, HK-K150, HK-K151, HK-K152, HK-K153, HK-K154, HK-K155, HK-K156, HK-K157, HK-K158, HK-K159, HK-K160, HK-K161, HK-K162, HK-K163, HK-K164, HK-K165, HK-K166, HK-K167, HK-K168, HK-K169, HK-K170, HK-K171, HK-K172, HK-K173, HK-K174, HK-K175, HK-K176, HK-K177, HK-K178, HK-K179, HK-K180, HK-K181, HK-K182, HK-K183, HK-K184, HK-K185, HK-K186, HK-K187, HK-K188, HK-K189, HK-K190, HK-K191, HK-K192, HK-K193, HK-K194, HK-K195, HK-K196, HK-K197, HK-K198, HK-K199, HK-K200
Chip Type:	OM6621EM
Serial Number	PR2501130199R0347
Power Supply	Input:DC 5V; DC 3.7V From Rechargeable Lithium-ion Battery
Trade Mark:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Sample Type:	<input checked="" type="checkbox"/> Portable Device, <input type="checkbox"/> Module, <input type="checkbox"/> Mobile Device



Antenna Type:	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated
Antenna Ports	<input checked="" type="checkbox"/> Ant 1, <input type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3
Antenna Gain*:	<input checked="" type="checkbox"/> Provided by applicant 3.22dBi
RF Cable*:	<input checked="" type="checkbox"/> Provided by applicant 0.5dB(0.6~1GHz); 0.8dB(1.4~2GHz); 1.0dB(2.1~2.7GHz); 1.5dB(3~4GHz); 1.8dB(4.4~6GHz);

Remark:

*All models are just name differences, motherboard, PCB circuit board, chip, electronic components, appearance is all the same.

*Since the above data and/or information is provided by the applicant relevant results or conclusions of this report are only made for these data and/or information , DNT is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.



2.3 Channel List

Operation Frequency of each channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

2.4 Test Environment and Mode

Operating Environment:	
Temperature:	20~25.0 °C
Humidity:	45~56 % RH
Atmospheric Pressure:	101.0~101.30 KPa
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

2.5 Power Setting of Test Software

Software Name	RF_Test Rev1.0.0.6		
Frequency(MHz)	2402	2440	2480
BLE 1M Setting	Default	Default	Default
BLE 2M Setting	Default	Default	Default

2.6 Description of Support Units

The EUT has been tested independent unit.



2.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

- FCC, USA

Designation Number: CN1348

- A2LA (Certificate No. 7050.01)

DONGGUAN DN TESTING CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 7050.01.

- Innovation, Science and Economic Development Canada

DONGGUAN DN TESTING CO., LTD. EMC Laboratory has been recognized by ISED as an accredited testing laboratory. CAB identifier is CN0149.

IC#: 30755.

2.8 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	DTS Bandwidth	±0.0196%
2	Maximum Conducted Output Power	±0.686 dB
3	Maximum Power Spectral Density Level	±0.743 dB
4	Band-edge Compliance	±1.328 dB
5	Unwanted Emissions In Non-restricted Freq Bands	9KHz-1GHz:±0.746dB 1GHz-26GHz: ±1.328dB

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 3.0dB (150kHz to 30MHz)
2	Radiated Emission	± 4.8dB (Below 1GHz)
		± 4.8dB (1GHz to 6GHz)
		± 4.5dB (6GHz to 18GHz)
		± 5.02dB (Above 18GHz)



2.9 Equipment List

For Connect EUT Antenna Terminal Test					
Description	Manufacturer	Model	Serial Number	Cal date	Due date
Signal Generator	Keysight	N5181A-6G	MY48180415	2024-10-23	2025-10-22
Signal Generator	Keysight	N5182B	MY57300617	2024-10-23	2025-10-22
Power supply	Keysight	E3640A	ZB2022656	2024-10-23	2025-10-22
Radio Communication Tester	R&S	CMW500	105082	2024-10-23	2025-10-22
Spectrum Analyzer	Aglient	N9010A	MY52221458	2024-10-23	2025-10-22
BT/WIFI Test Software	Tonscend	JS1120 V3.1.83	NA	NA	NA
RF Control Unit	Tonscend	JS0806-2	22F8060581	NA	NA
Power Sensor	Anritsu	ML2495A	2129005	2024-10-23	2025-10-22
Pulse Power Sensor	Anritsu	MA2411B	1911397	2024-10-23	2025-10-22
temperature and humidity box	SCOTEK	SCD-C40-80PRO	6866682020008	2024-10-23	2025-10-22

Test Equipment for Conducted Emission					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Receiver	R&S	ESCI3	101152	2024-10-23	2025-10-22
LISN	R&S	ENV216	102874	2024-10-23	2025-10-22
ISN	R&S	ENY81-CA6	1309.8590.03	2024-10-23	2025-10-22

Test Equipment for Radiated Emission(30MHz-1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Receiver	R&S	ESR7	102497	2024-10-23	2025-10-22
Test Software	ETS-LINDGREN	TiLE-FULL	NA	NA	NA
RF Cable	ETS-LINDGREN	RFC-NMS-100-NMS-350-IN	NA	2024-10-23	2025-10-22
Log periodic antenna	ETS-LINDGREN	VULB 9168	01475	2022-11-28	2025-11-27
Pre-amplifier	Schwarzbeck	BBV9743B	00423	2024-10-23	2025-10-22



Test Equipment for Radiated Emission(Above 1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Frequency analyser	Keysight	N9010A	MY52221458	2024-10-23	2025-10-22
RF Cable	ETS-LINDGREN	RFC-NMS-100-NMS-350-IN	NA	2024-10-23	2025-10-22
Horn Antenna	ETS-LINDGREN	3117	00252567	2022-11-28	2025-11-27
Double ridged waveguide antenna	ETS-LINDGREN	3116C	00251780	2022-11-28	2025-11-27
Test Software	ETS-LINDGREN	TiLE-FULL	NA	NA	NA
Pre-amplifier	ETS-LINDGREN	3117-PA	252567	2024-10-23	2025-10-22
Pre-amplifier	ETS-LINDGREN	3116C-PA	251780	2024-10-23	2025-10-22

2.10 Assistant equipment used for test

Code	Equipment	Manufacturer	Model No.	Equipment No.
1	Adapter	GaoFanDe	GFDQ3-0502000U	NA
2	Computer	acer	N22C8	EMC notebook01



3 Test results and Measurement Data

3.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:	The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.22dBi.	



3.2 Duty Cycle


Refer to section : **Appendix A**

Note:

- 1.If duty cycle $< 98\%$, the conducted average output power and average power spectral density should be add duty factor.
- 2.If duty cycle $\geq 98\%$, the EUT is consider to be transmitting continuously, the conducted average output power and average power spectral density no need to add duty factor (consider to be zero).
- 3.The conducted peak output power and peak power spectral density no need to consider duty factor.
- 4.The on-time time is transmission duration(T).




3.3 DTS (6 dB) Bandwidth

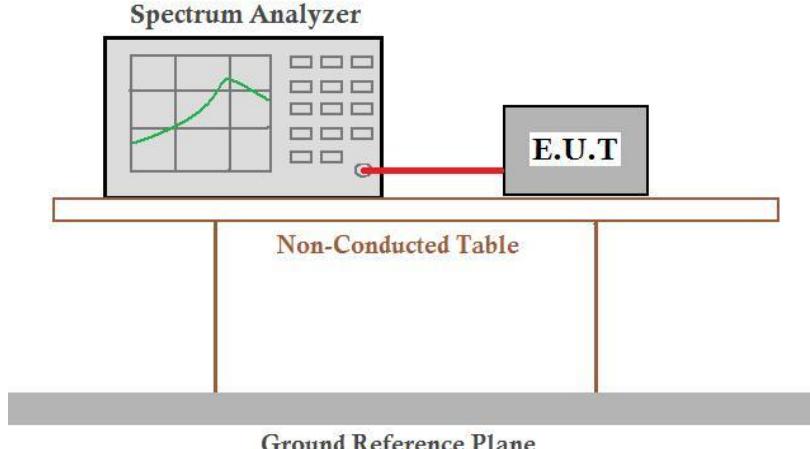Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013 Section 11.8.1 Option 1
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p> 
Instruments Used:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the the worst case of GFSK
Limit:	≥ 500 kHz
Test Results:	Pass

The detailed test data see: **Appendix B**




3.4 Conducted Output Power

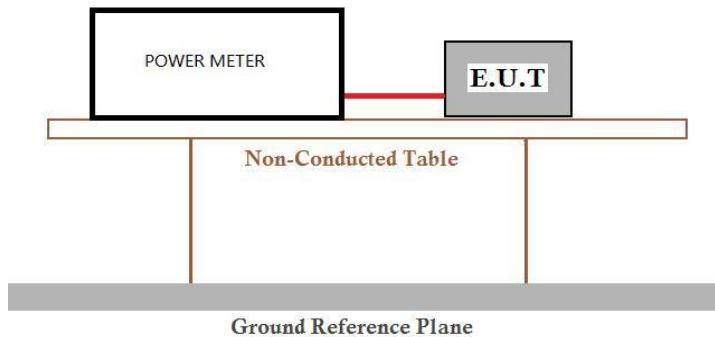Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013 Section 11.9.1.3
Test Setup:	
Test Instruments:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the the worst case of GFSK
Limit:	30dBm
Test Results:	Pass

The detailed test data see: **Appendix C**




3.5 Power Spectral Density

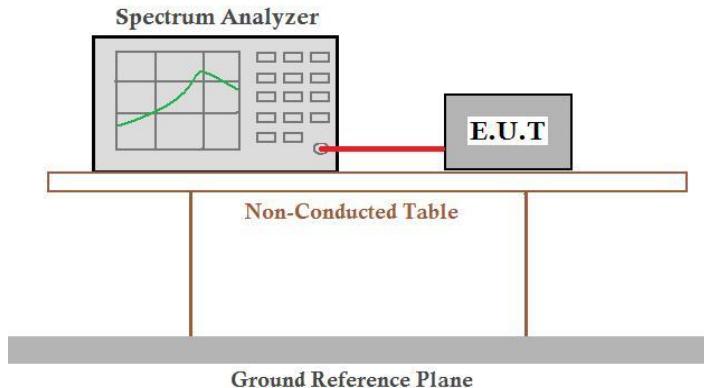Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013 Section 11.10.2
Test Setup:	
Test Instruments:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the the worst case of GFSK
Limit:	$\leq 8.00 \text{dBm}/3\text{kHz}$
Test Results:	Pass

The detailed test data see: **Appendix D**




3.6 Band-edge for RF Conducted Emissions

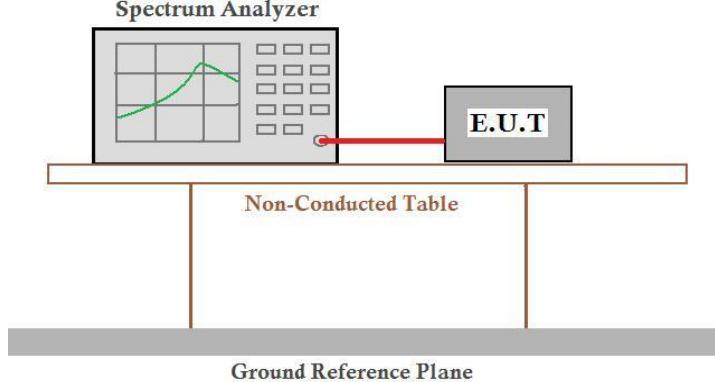Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.13
Test Setup:	
Instruments Used:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the the worst case of GFSK
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

The detailed test data see: **Appendix E**



3.7 RF Conducted Spurious Emissions

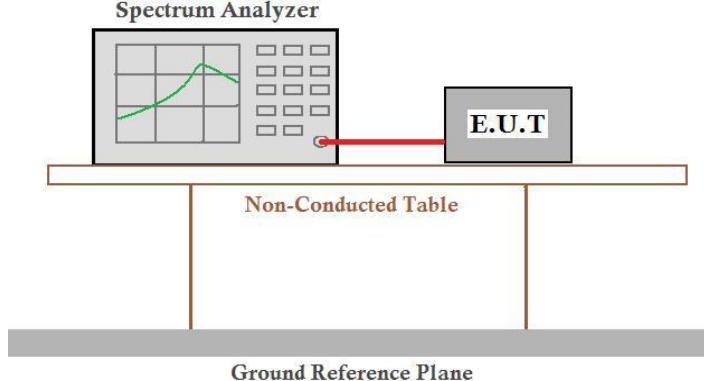Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	
Instruments Used:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the worst case of GFSK;
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

The detailed test data see: **Appendix F**



3.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz (DC \geq 0.98) \geq 1/T (DC<0.98)	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

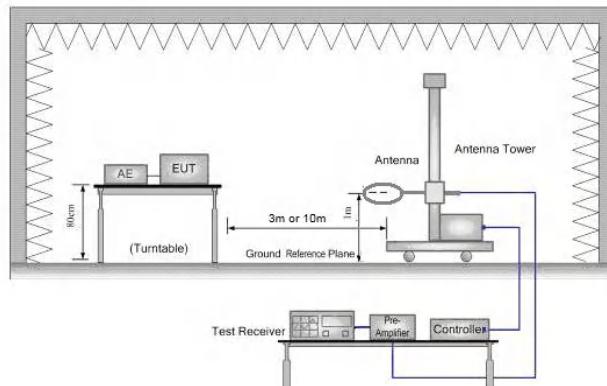


Figure 1. Below 30MHz

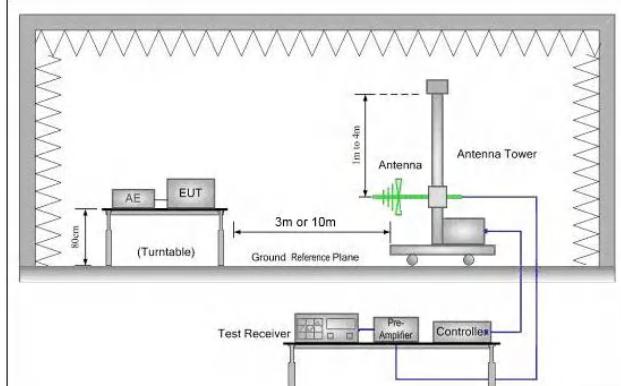


Figure 2. 30MHz to 1GHz

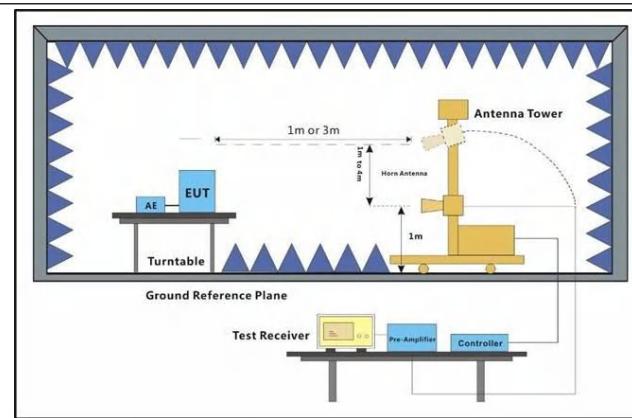



Figure 3. Above 1 GHz

Test Procedure:


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.



Test Configuration:	<p>Measurements Below 1000MHz</p> <ul style="list-style-type: none">• RBW = 120 kHz• VBW = 300 kHz• Detector = Peak• Trace mode = max hold <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none">• RBW = 1 MHz• VBW ≥ 3 MHz• Detector = Peak• Sweep time = auto• Trace mode = max hold <p>Average Measurements Above 1000MHz</p> <ul style="list-style-type: none">• RBW = 1 MHz• VBW = 10 Hz, when duty cycle is no less than 98 percent.• VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Charging+Transmitting mode. Through Pre-scan, find the worst case of GFSK, Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass

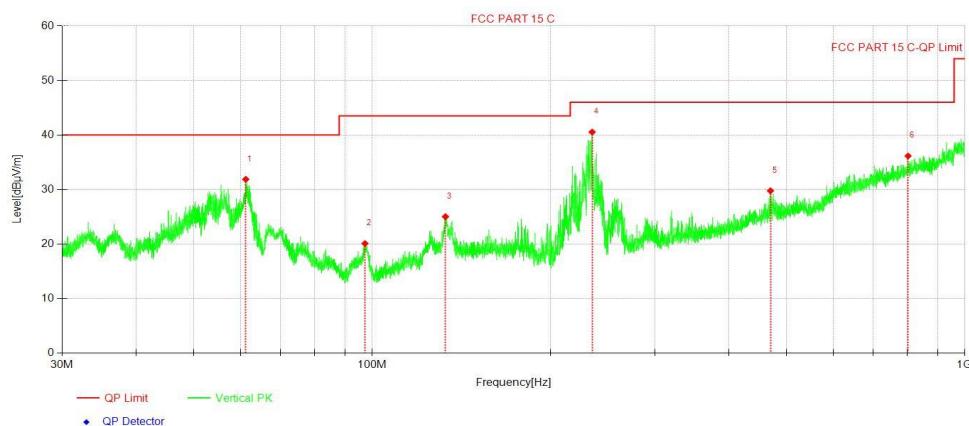Test data
For 30-1000MHz


NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	61.21	40.79	-8.90	31.89	40.00	8.11	100	161	PK	V
2	97.28	33.13	-13.02	20.11	43.50	23.39	100	266	PK	V
3	133.01	34.19	-9.15	25.04	43.50	18.46	100	53	PK	V
4	235.23	50.27	-9.72	40.55	46.00	5.45	100	75	PK	V
5	470.35	32.10	-2.32	29.78	46.00	16.22	100	79	PK	V
6	802.91	31.80	4.37	36.17	46.00	9.83	100	331	PK	V

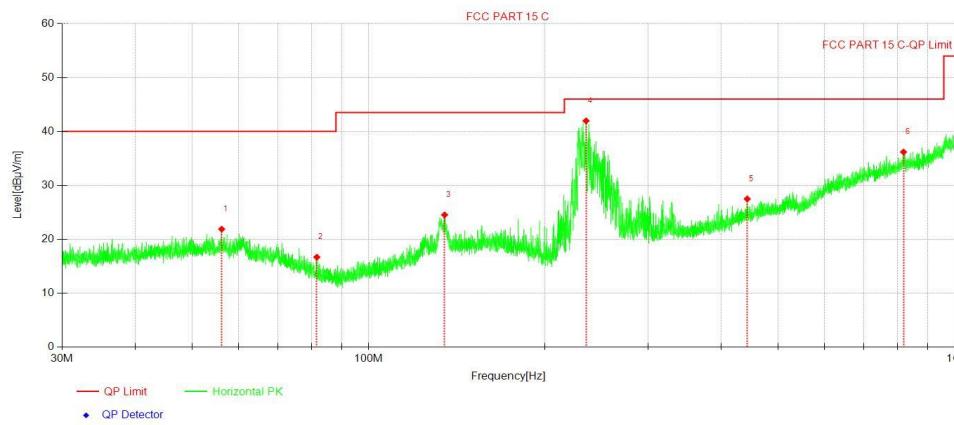


NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	56.15	30.26	-8.36	21.90	40.00	18.10	100	112	PK	H
2	81.64	29.67	-12.97	16.70	40.00	23.30	100	359	PK	H
3	134.88	33.51	-8.97	24.54	43.50	18.96	100	137	PK	H
4	235.23	51.69	-9.72	41.97	46.00	4.03	100	360	PK	H
5	443.29	30.48	-2.98	27.50	46.00	18.50	100	304	PK	H
6	819.40	31.43	4.77	36.20	46.00	9.80	100	359	PK	H




For above 1GHz

BLE 1M 2402MHz

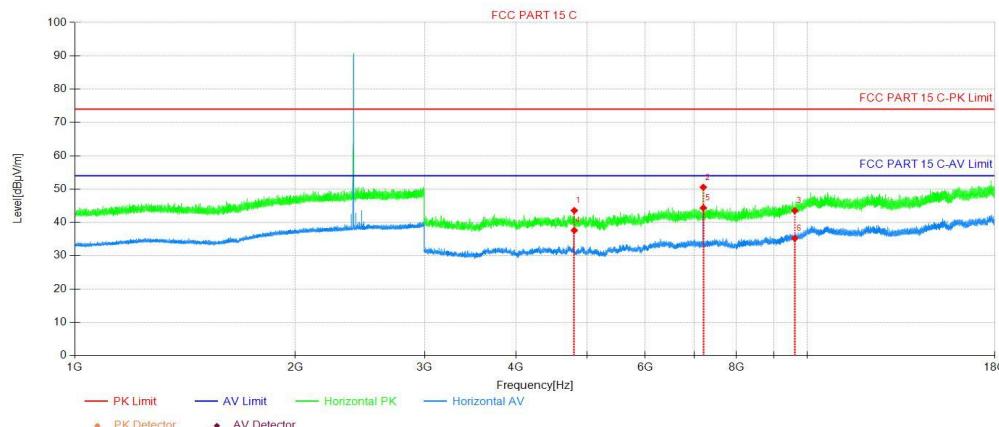


NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	4804.59	48.17	-4.61	43.56	74.00	30.44	150	360	Peak	H
2	7206.21	52.31	-1.76	50.55	74.00	23.45	150	178	Peak	H
3	9608.58	42.66	0.88	43.54	74.00	30.46	150	3	Peak	H
4	4804.59	42.23	-4.61	37.62	54.00	16.38	150	342	AV	H
5	7206.96	46.11	-1.76	44.35	54.00	9.65	150	178	AV	H
6	9608.58	34.35	0.88	35.23	54.00	18.77	150	178	AV	H

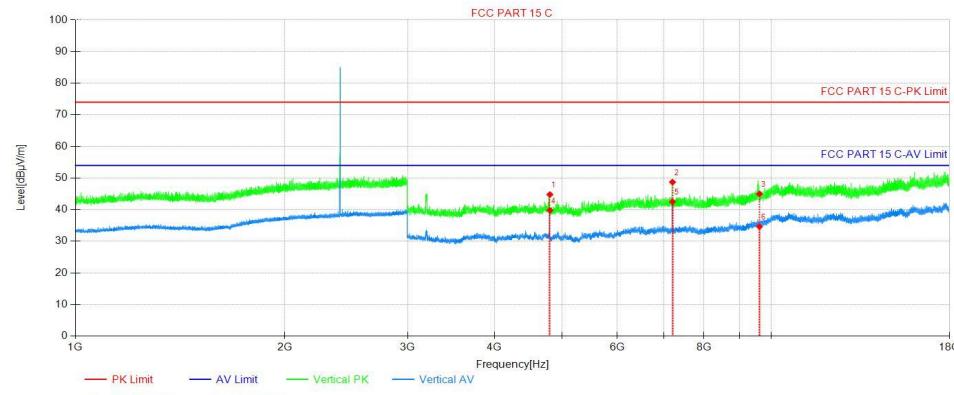


NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	AV Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	4803.84	49.41	-4.61	44.80	74.00	29.20	150	299	Peak	V
2	7206.96	50.49	-1.76	48.73	74.00	25.27	150	123	Peak	V
3	9608.58	44.13	0.88	45.01	74.00	28.99	150	156	Peak	V
4	4804.59	44.41	-4.61	39.80	54.00	14.20	150	156	AV	V
5	7207.71	44.25	-1.76	42.49	54.00	11.51	150	123	AV	V
6	9608.58	33.78	0.88	34.66	54.00	19.34	150	281	AV	V



BLE 1M 2440MHz

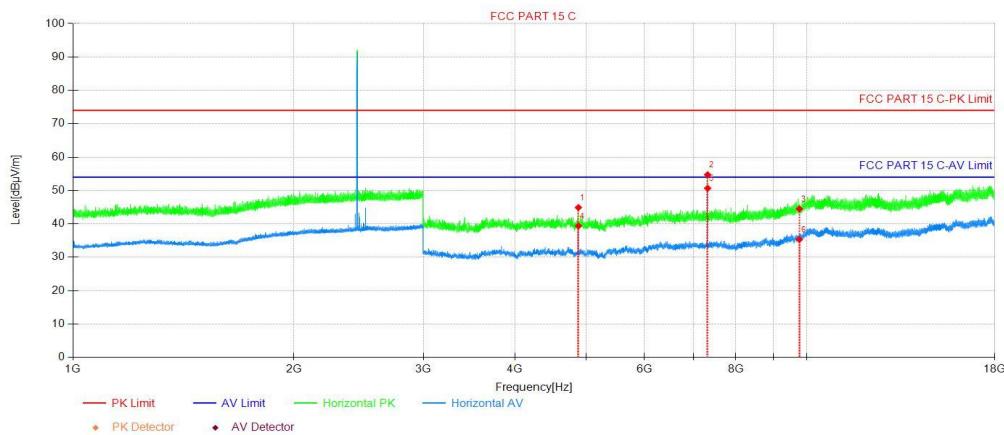


NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	AV Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	4880.34	49.62	-4.71	44.91	74.00	29.09	150	314	Peak	H
2	7319.46	56.23	-1.50	54.73	74.00	19.27	150	193	Peak	H
3	9760.08	42.88	1.62	44.50	74.00	29.50	150	88	Peak	H
4	4881.09	44.11	-4.71	39.40	54.00	14.60	150	349	AV	H
5	7320.21	52.16	-1.49	50.67	54.00	3.33	150	175	AV	H
6	9760.08	33.73	1.62	35.35	54.00	18.65	150	193	AV	H

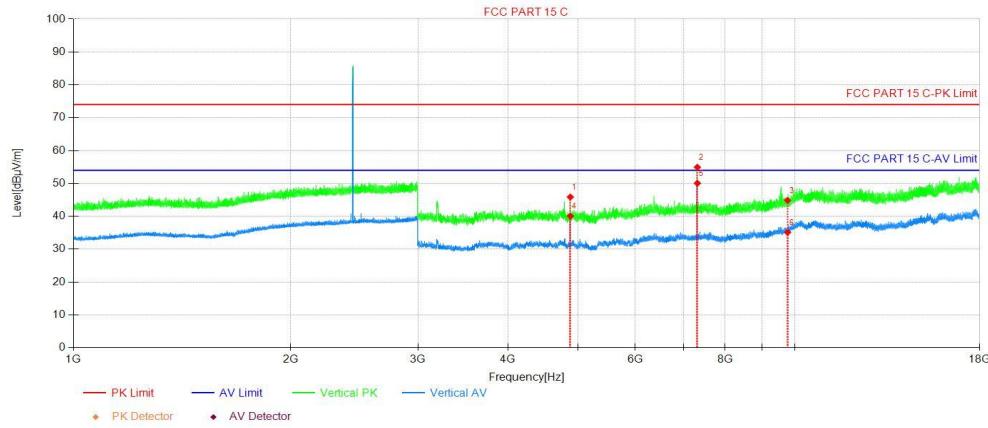


NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	AV Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	4880.34	50.59	-4.71	45.88	74.00	28.12	150	163	Peak	V
2	7319.46	56.45	-1.50	54.95	74.00	19.05	150	128	Peak	V
3	9760.08	43.26	1.62	44.88	74.00	29.12	150	109	Peak	V
4	4881.09	44.80	-4.71	40.09	54.00	13.91	150	145	AV	V
5	7320.21	51.56	-1.49	50.07	54.00	3.93	150	109	AV	V
6	9760.08	33.49	1.62	35.11	54.00	18.89	150	236	AV	V



BLE 1M 2480MHz

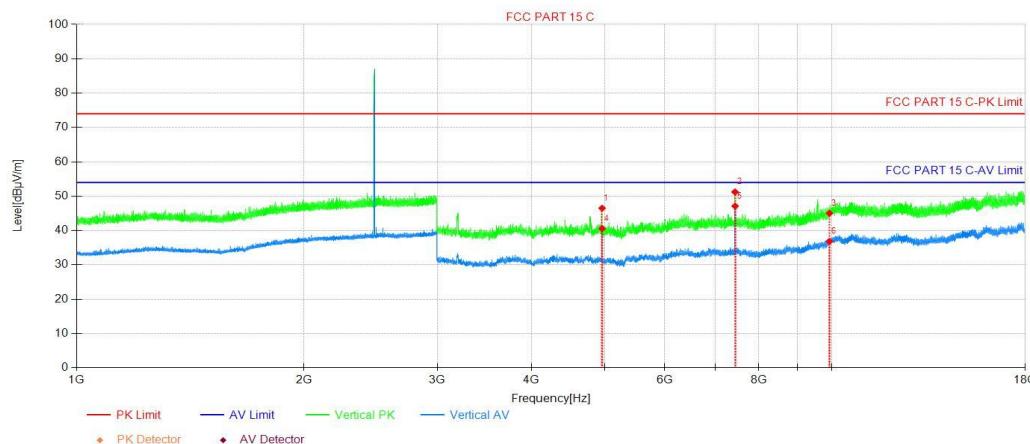

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	4960.59	51.35	-4.86	46.49	74.00	27.51	150	141	Peak	V
2	7439.47	52.56	-1.34	51.22	74.00	22.78	150	122	Peak	V
3	9920.59	42.75	2.27	45.02	74.00	28.98	150	360	Peak	V
4	4961.34	45.43	-4.86	40.57	54.00	13.43	150	141	AV	V
5	7440.22	48.46	-1.34	47.12	54.00	6.88	150	122	AV	V
6	9920.59	34.58	2.27	36.85	54.00	17.15	150	314	AV	V

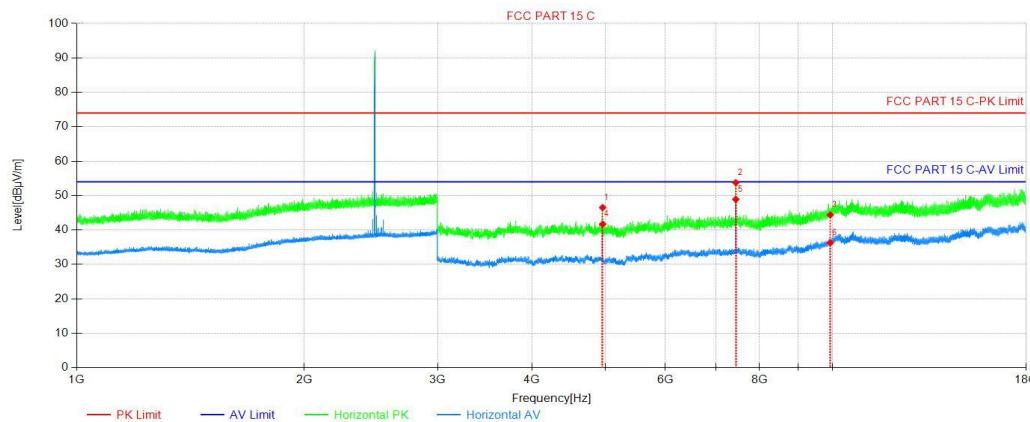

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	4960.59	51.40	-4.86	46.54	74.00	27.46	150	308	Peak	H
2	7440.97	55.11	-1.34	53.77	74.00	20.23	150	182	Peak	H
3	9920.59	42.13	2.27	44.40	74.00	29.60	150	358	Peak	H
4	4960.59	46.58	-4.86	41.72	54.00	12.28	150	308	AV	H
5	7440.97	50.27	-1.34	48.93	54.00	5.07	150	182	AV	H
6	9920.59	34.03	2.27	36.30	54.00	17.70	150	271	AV	H



Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

$$\text{Result Level} = \text{Reading Level} + \text{Correct Factor}(\text{including Ant.Factor, Cable Factor etc.})$$

2. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

3. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be report.

4. All channels had been pre-test,only the worst case was reported.

3.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

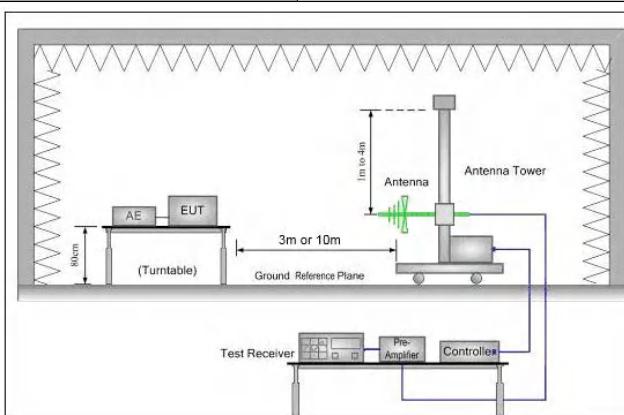


Figure 1. 30MHz to 1GHz

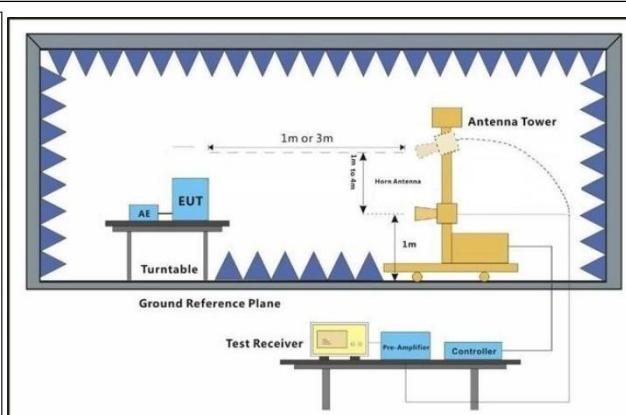


Figure 2. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"> For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz

Dongguan DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com




	<ul style="list-style-type: none">• RBW = 120 kHz• VBW = 300 kHz• Detector = Peak• Trace mode = max hold <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none">• RBW = 1 MHz• VBW ≥ 3 MHz• Detector = Peak• Sweep time = auto• Trace mode = max hold <p>Average Measurements Above 1000MHz</p> <ul style="list-style-type: none">• RBW = 1 MHz• VBW = 10 Hz, when duty cycle is no less than 98 percent.• VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum <p>transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode. Through Pre-scan, find the worst case of GFSK Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass




Test Date

BLE 1M 2402MHz

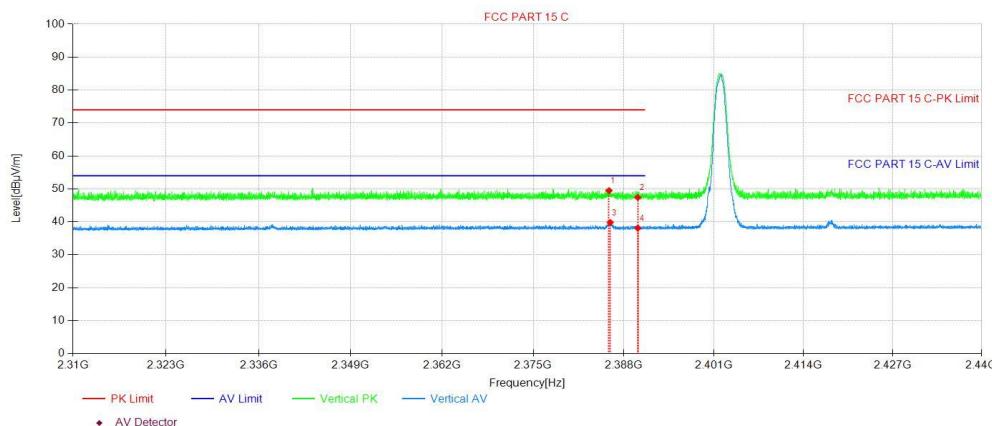


NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	AV Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	2385.87	50.30	-0.81	49.49	74.00	24.51	150	72	Peak	V
2	2390.01	48.23	-0.80	47.43	74.00	26.57	150	141	Peak	V
3	2386.04	40.64	-0.81	39.83	54.00	14.17	150	185	AV	V
4	2390.01	38.91	-0.80	38.11	54.00	15.89	150	3	AV	V

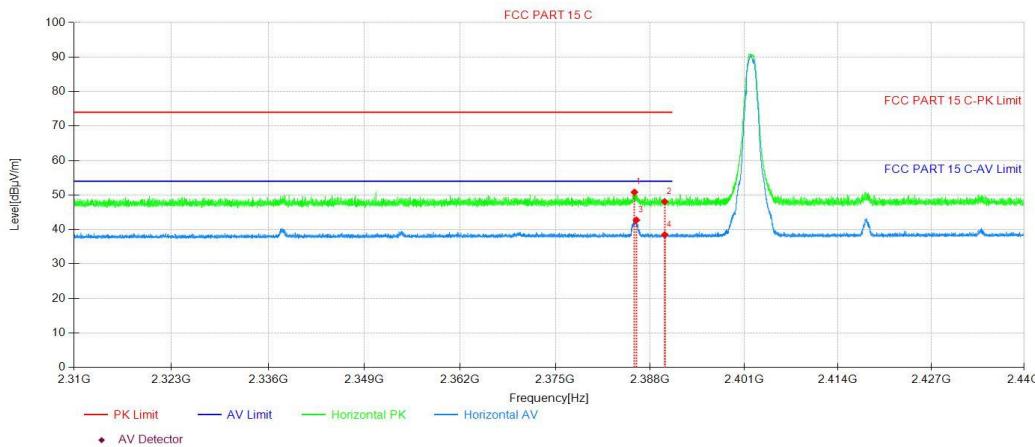


NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	AV Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	2385.84	51.63	-0.81	50.82	74.00	23.18	150	186	Peak	H
2	2390.01	48.89	-0.80	48.09	74.00	25.91	150	118	Peak	H
3	2386.10	43.56	-0.81	42.75	54.00	11.25	150	186	AV	H
4	2390.01	39.27	-0.80	38.47	54.00	15.53	150	346	AV	H



BLE 2480MHz

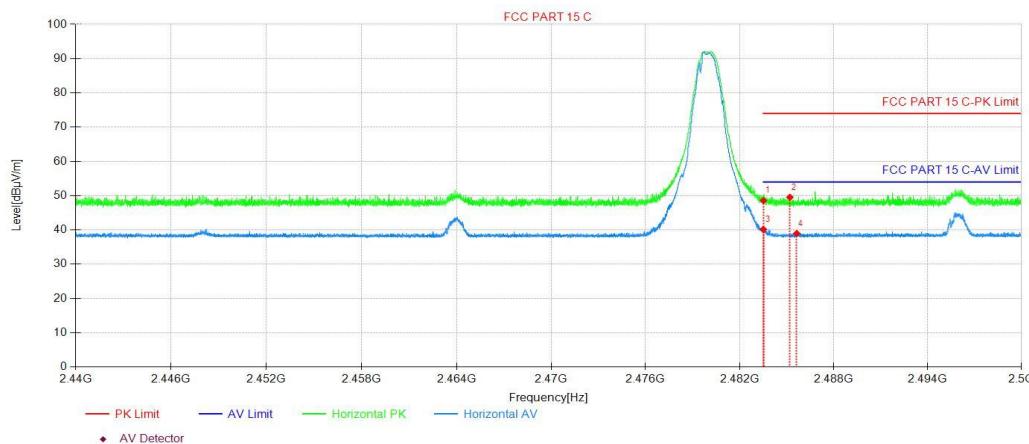

NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	AV Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	2483.50	48.89	-0.29	48.60	74.00	25.40	150	150	PK	Horizontal
2	2485.19	49.82	-0.27	49.55	74.00	24.45	150	237	PK	Horizontal
3	2483.50	40.47	-0.29	40.18	54.00	13.82	150	194	AV	Horizontal
4	2485.63	39.25	-0.27	38.98	54.00	15.02	150	271	AV	Horizontal

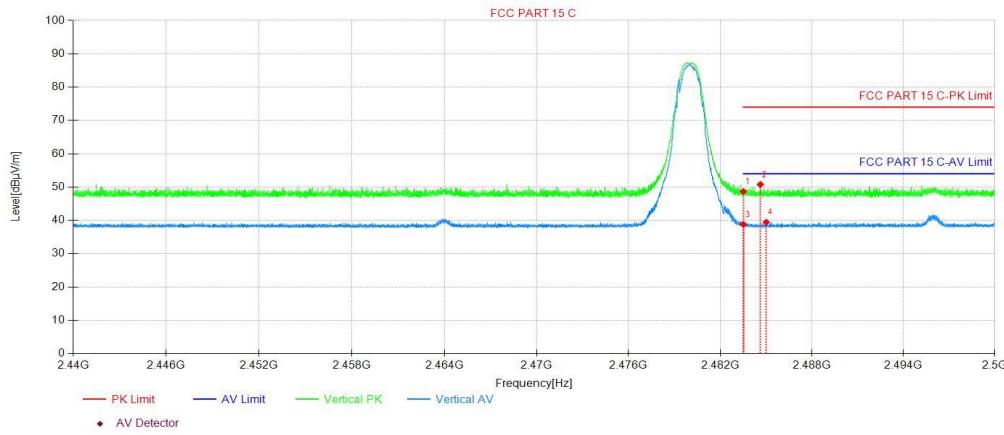


NO.	Freq. [MHz]	Reading Level [dB μ V]	Correct Factor [dB/m]	Result Level [dB μ V/m]	AV Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	2483.50	48.95	-0.29	48.66	74.00	25.34	150	79	PK	Vertical
2	2484.62	51.08	-0.28	50.80	74.00	23.20	150	206	PK	Vertical
3	2483.50	39.06	-0.29	38.77	54.00	15.23	150	154	AV	Vertical
4	2485.00	39.71	-0.27	39.44	54.00	14.56	150	133	AV	Vertical

Note:

1. The BLE 1M is the worse case.
2. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

$$\text{Result Level} = \text{Reading Level} + \text{Correct Factor}(\text{including Ant.Factor ,Cable Factor etc.})$$

3.10AC Power Line Conducted Emissions

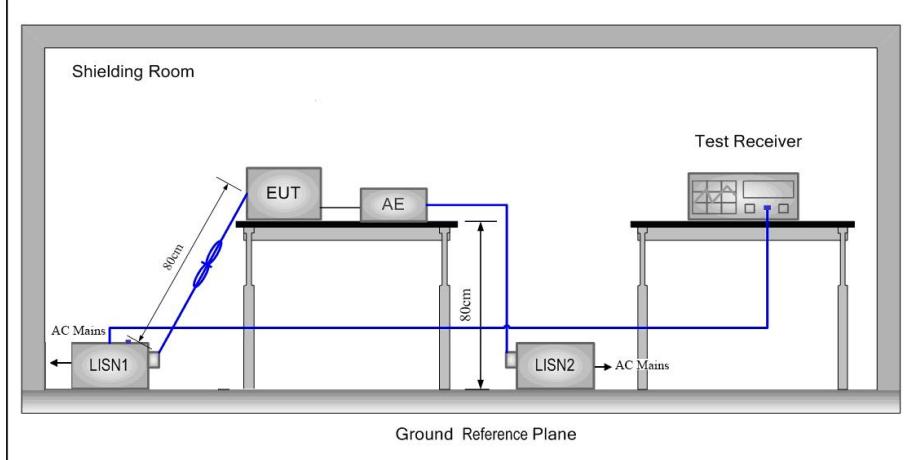
Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 2013 on conducted measurement. 		
Test Setup:	 <p>The diagram illustrates the test setup for conducted emissions. It shows a 'Shielding Room' containing a 'EUT' (Equipment Under Test) and an 'AE' (Antenna Equipment). The EUT is connected to an 'AC Mains' source through a 'LISN1'. The AE is connected to the EUT and also to an 'AC Mains' source through a 'LISN2'. Both LISNs are connected to a 'Ground Reference Plane' at the bottom. A 'Test Receiver' is connected to the AE. The distance between LISN1 and LISN2 is 80cm, and the height of the EUT above the ground reference plane is 80cm.</p>		

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel. Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the the worst case of GFSK
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live Line:

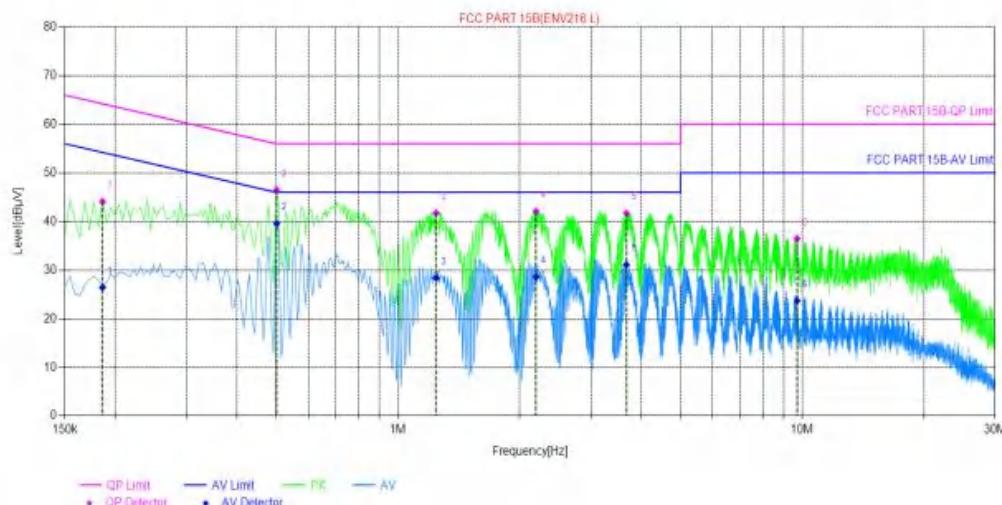

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBuV]	QP Limit [dBuV]	QP Margin [dB]	AV Value [dBuV]	AV Limit [dBuV]	AV Margin [dB]	Verdict
1	0.186	9.84	44.11	64.21	20.10	26.44	54.21	27.77	PASS
2	0.501	9.71	46.48	56.00	9.52	39.60	46.00	6.40	PASS
3	1.2435	9.71	41.76	56.00	14.24	28.39	46.00	17.61	PASS
4	2.1975	9.79	42.09	56.00	13.91	28.60	46.00	17.40	PASS
5	3.6735	9.93	41.70	56.00	14.30	31.10	46.00	14.90	PASS
6	9.708	9.82	36.49	60.00	23.51	23.69	50.00	26.31	PASS

Neutral Line:

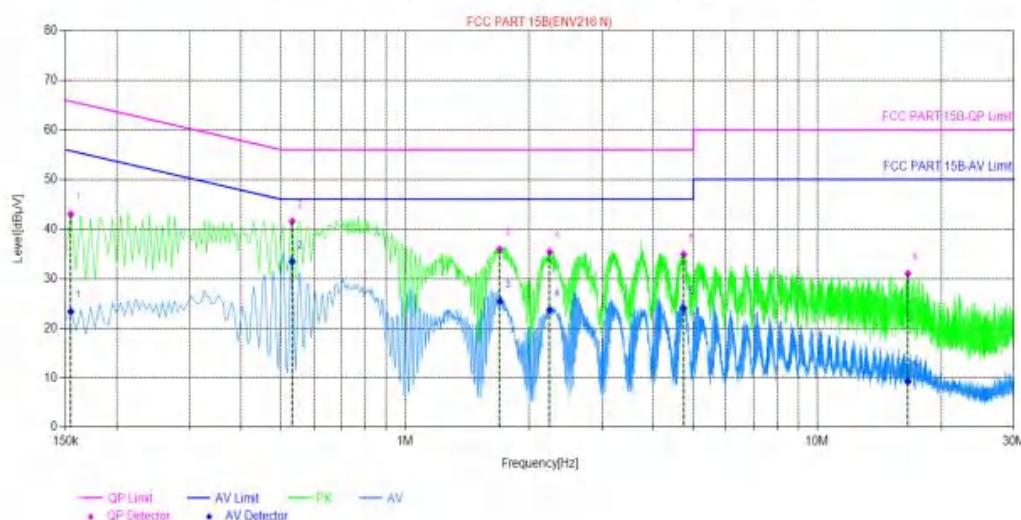

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dB μ V]	QP Limit [dB μ V]	QP Margin [dB]	AV Value [dB μ V]	AV Limit [dB μ V]	AV Margin [dB]	Verdict
1	0.1545	9.80	42.98	65.75	22.77	23.36	55.75	32.39	PASS
2	0.5325	9.73	41.56	56.00	14.44	33.43	46.00	12.57	PASS
3	1.698	9.75	35.91	56.00	20.09	25.41	46.00	20.59	PASS
4	2.2425	9.80	35.38	56.00	20.62	23.68	46.00	22.32	PASS
5	4.74	9.97	34.87	56.00	21.13	24.08	46.00	21.92	PASS
6	16.5885	9.98	31.00	60.00	29.00	9.25	50.00	40.75	PASS

Remark:

1. The BLE 1M is the worse case.
2. The following Quasi-Peak and Average measurements were performed on the EUT:
3. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including LISN Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including LISN Factor, Cable Factor etc.)



4 Appendix

Appendix A: Duty Cycle


Test Result

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	Limit	Verdict
BLE_1M	Ant1	2402	0.26	0.72	0.3611	36.11	4.42	---	---
		2440	0.26	0.72	0.3611	36.11	4.42	---	---
		2480	0.25	0.71	0.3521	35.21	4.53	---	---
BLE_2M	Ant1	2402	0.14	0.71	0.1972	19.72	7.05	---	---
		2440	0.15	0.71	0.2113	21.13	6.75	---	---
		2480	0.15	0.72	0.2083	20.83	6.81	---	---




Test Graphs


BLE_1M_Ant1_2402

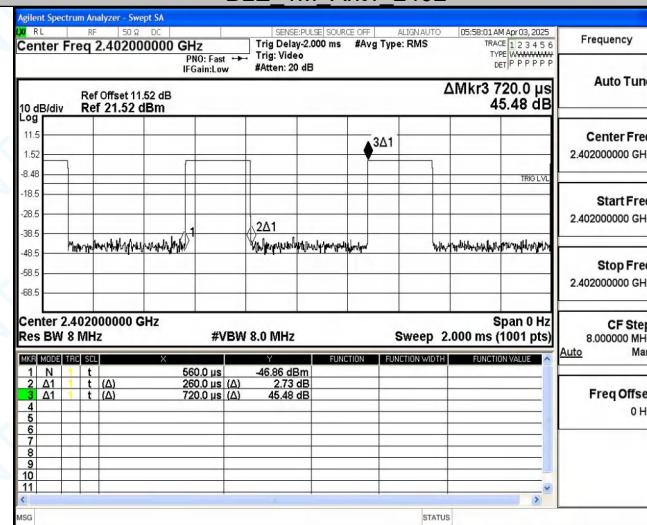

BLE_1M_Ant1_2440

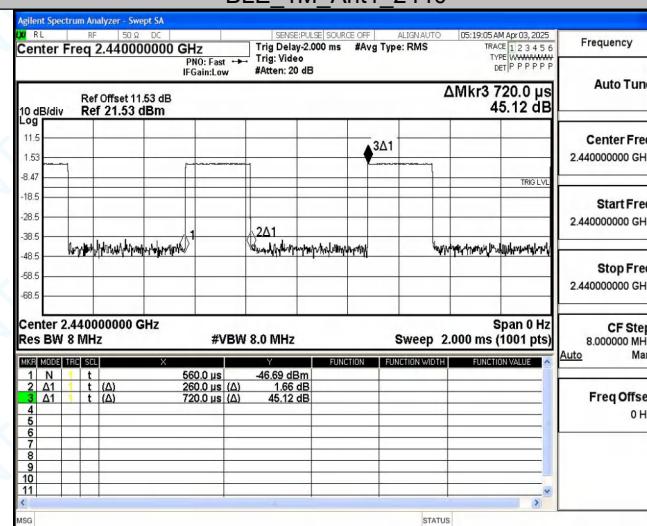

BLE_1M_Ant1_2480

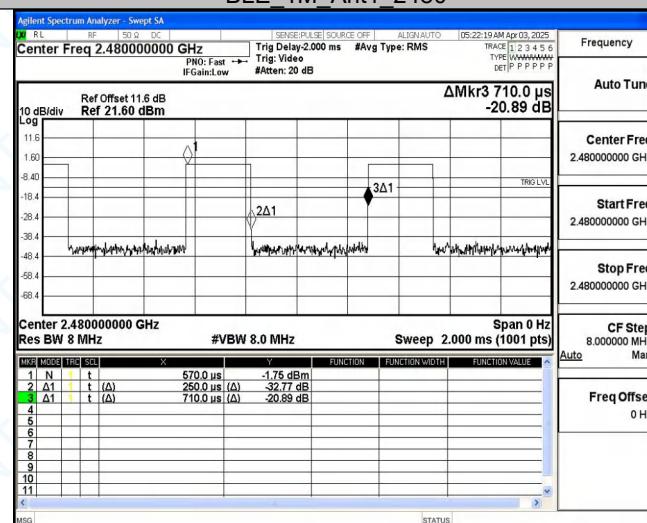

BLE_2M_Ant1_2402


Dongguan DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel:+86-769-88087383

E-mail: service@dn-testing.com

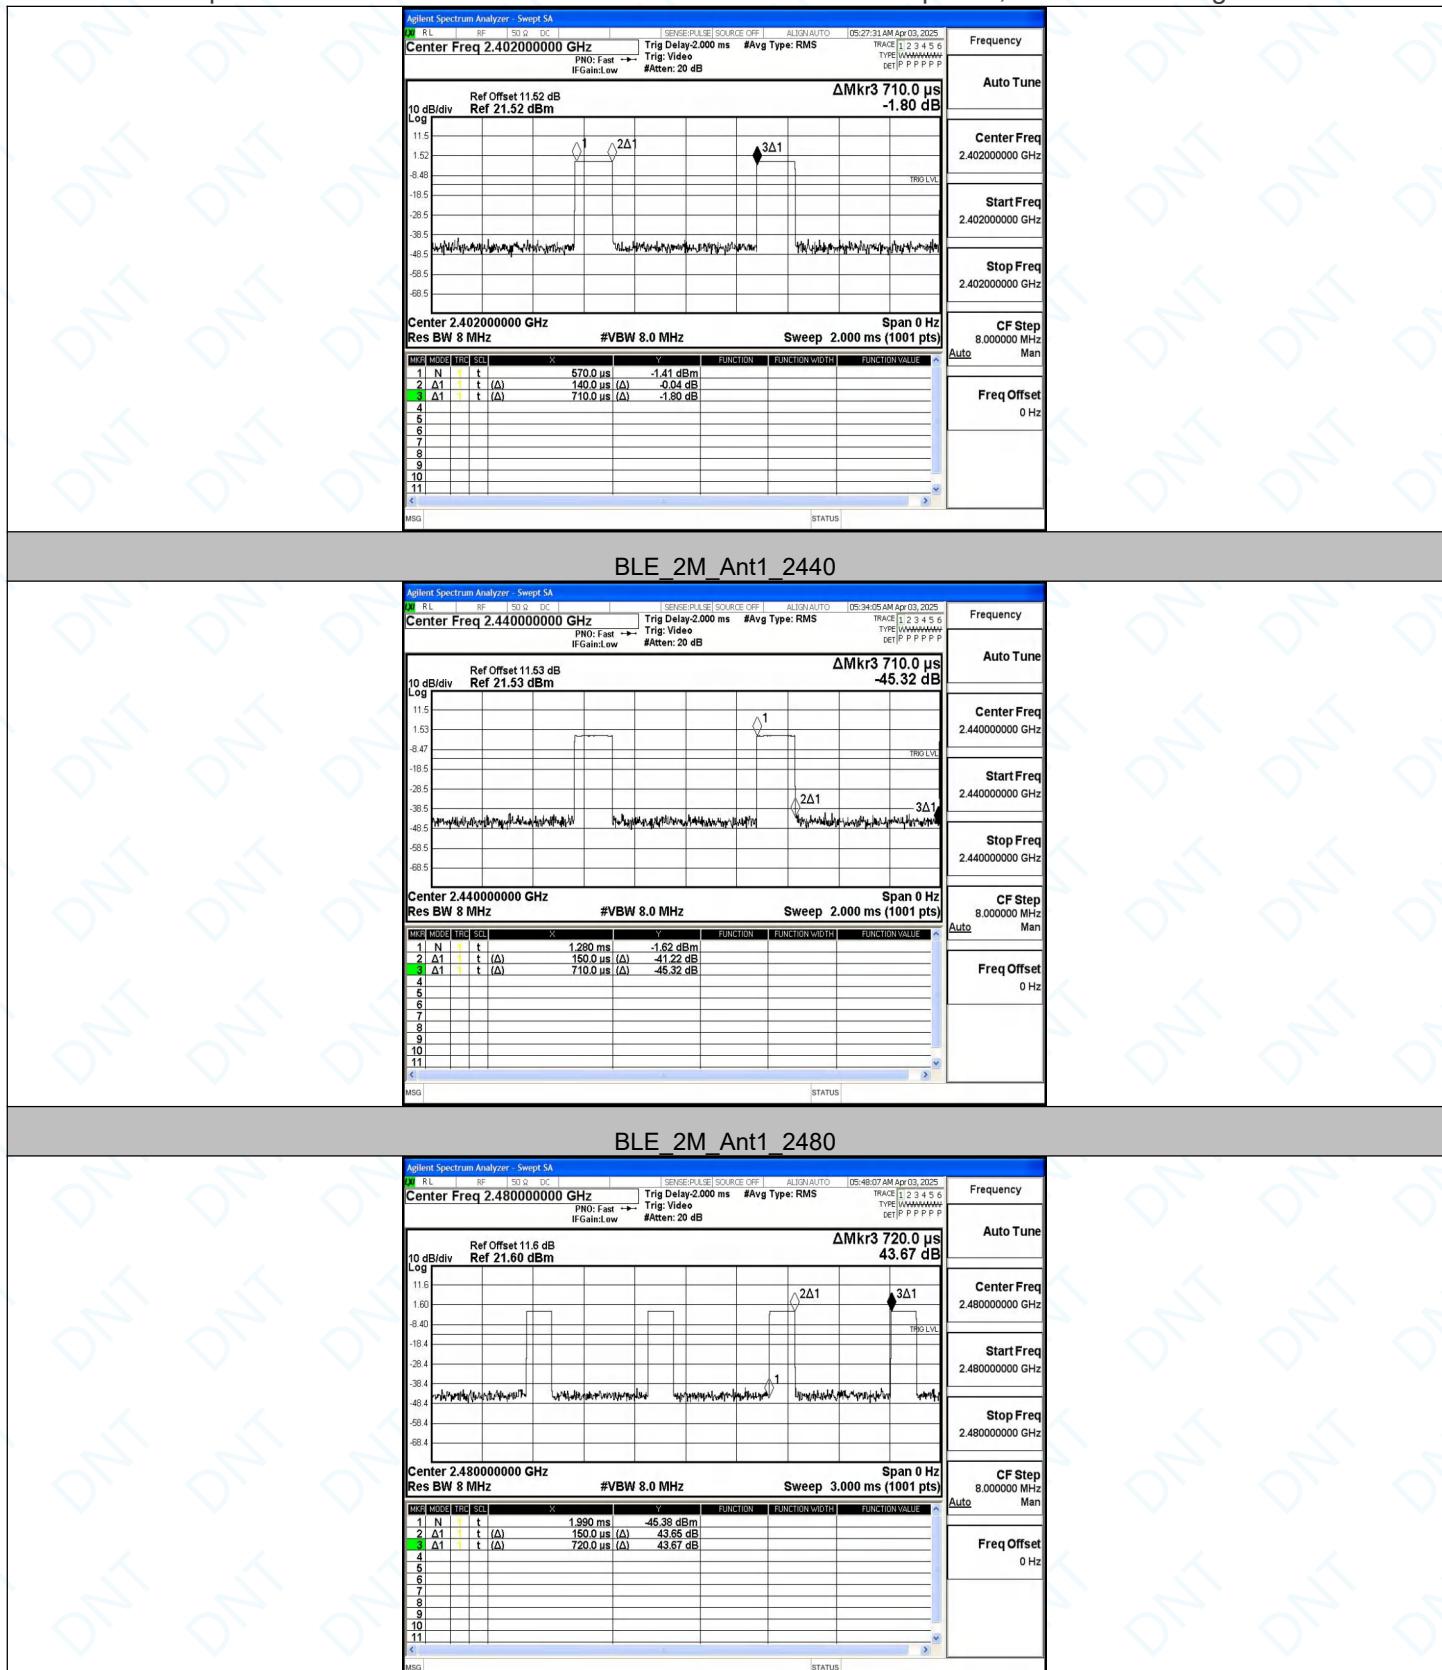






Appendix B: DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.616	2401.688	2402.304	0.5	PASS
		2440	0.628	2439.672	2440.300	0.5	PASS
		2480	0.628	2479.668	2480.296	0.5	PASS
BLE_2M	Ant1	2402	0.816	2401.396	2402.212	0.5	PASS
		2440	0.852	2439.388	2440.240	0.5	PASS
		2480	0.832	2479.384	2480.216	0.5	PASS



Test Graphs

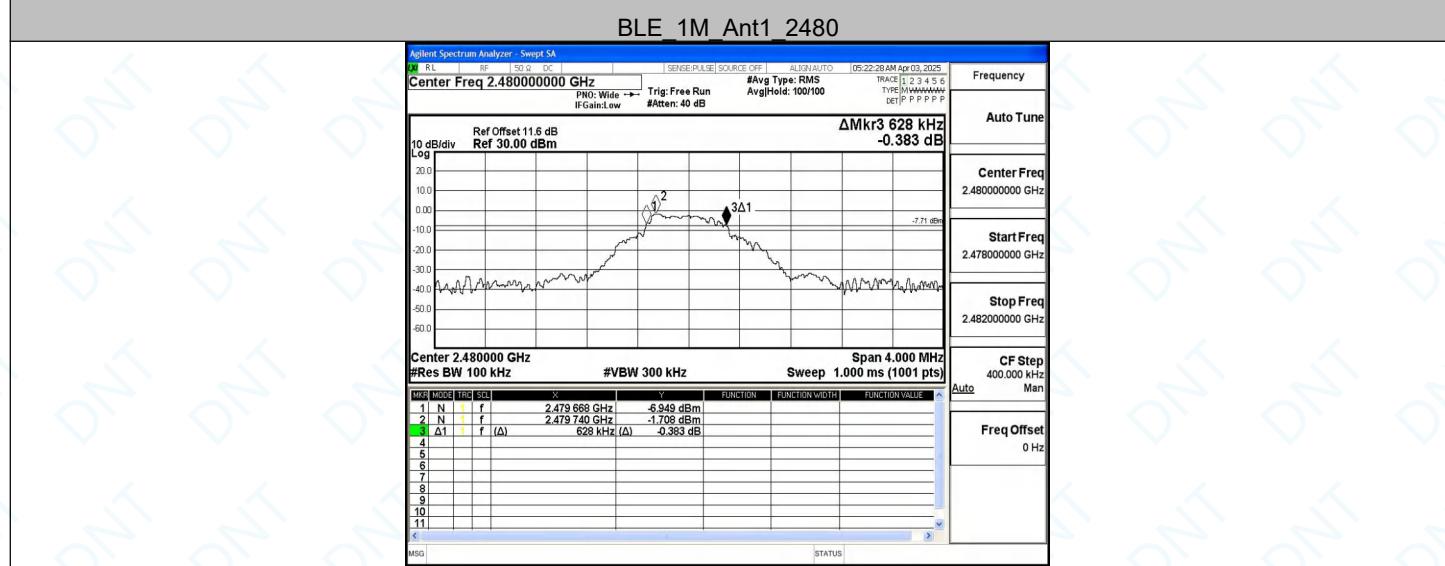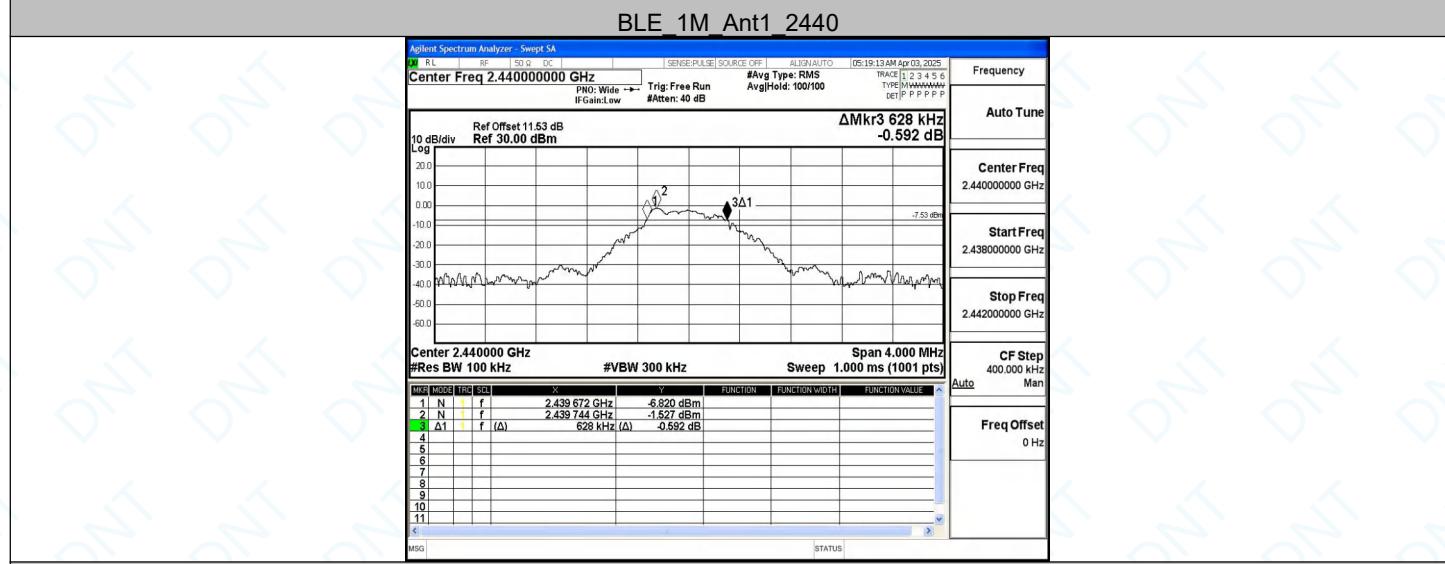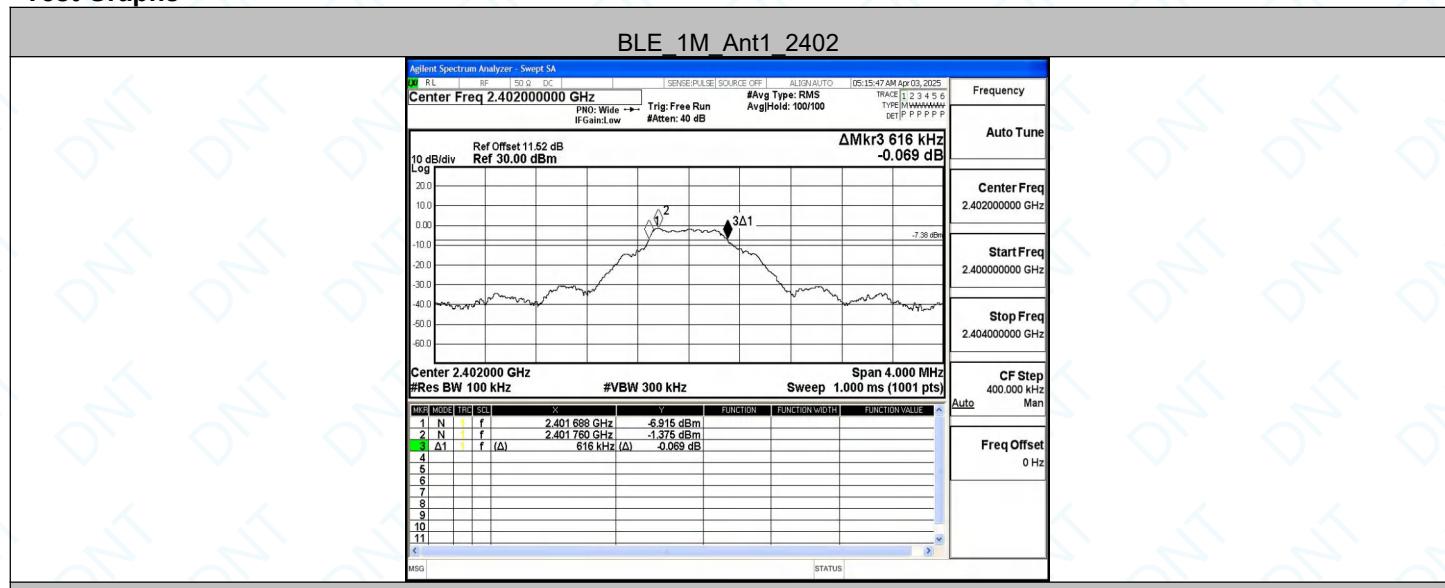

BLE_2M_Ant1_2402