



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: 深圳长朗智能科技有限公司

Product Name: WIFI Antenna

Product Model: Nano 激光雕刻机

Part Number: LJF02-24031608-R0A

Write By : Huxuwen

Issued Date: 2024-03-16

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2024/03/16	



Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	6
8. Product Drawing	7

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2500 MHz
VSWR	<2.0
Efficiency	≥30%
Impedance	50Ohm
Polarization	Linear
Gain	≤2.0dB
B. Material & Mechanical Characteristics	
Material of Radiator	FPC(Black),LJWF25DFB1
Cable Type	Φ1.13mm,L95mm,Black
Connector Type	IPX1
Dimension	21.0*16.8mm
C. Environmental	
Operation Temperature	- 20 °C ~ + 70 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- | | |
|----------------------------------|---------------------|
| 1.Network Analyzers | Agilent 8753D/5071C |
| 2.HSPA and LTE protocol test set | R&S CMW500 -PT |
| 3.Communications Test Set | Agilent 8960 |
| 4.3D Chamber Test System | |

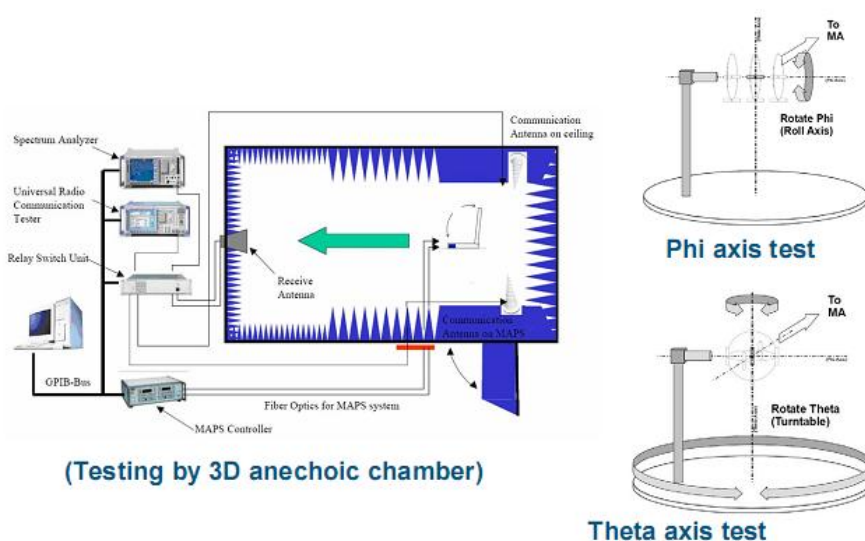


Chart 1 Test topology



5.Test Report

5.1 Voltage Standing Wave Ratio(VSWR).


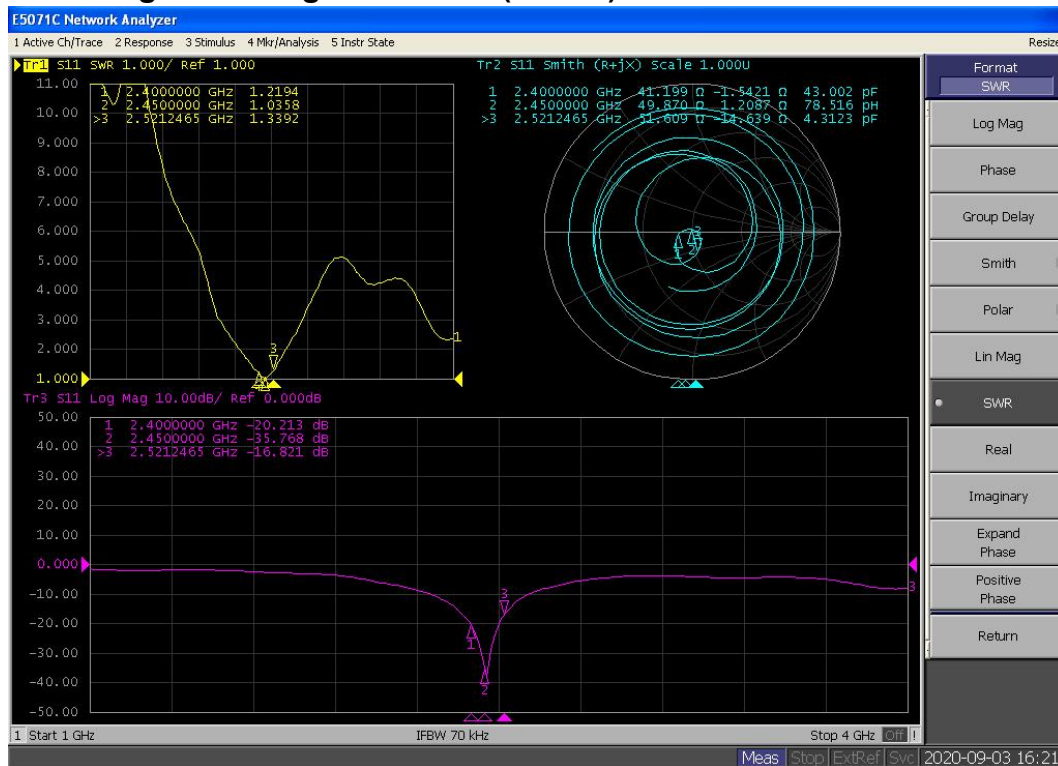



Chart 2 VSWR

5.2 Efficient and gain.

Passive	Freq(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Test For	Effi(%)	54.38	58.61	50.82	56.01	61.82	55.13	61.04	57.28	50.26	53.60	55.75
WIFI BT	Gain(dBi)	1.94	1.96	1.86	1.99	1.91	1.97	1.87	1.90	1.83	1.79	1.72

5.3 Radiation pattern.

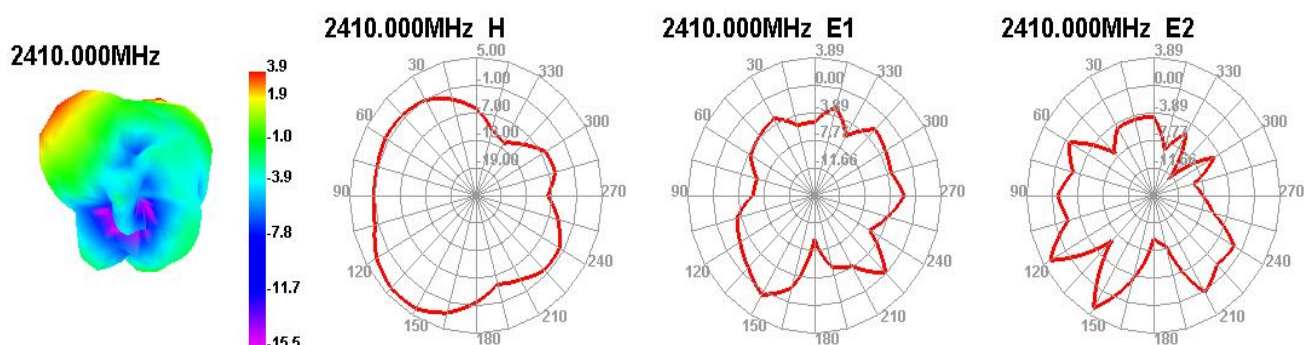

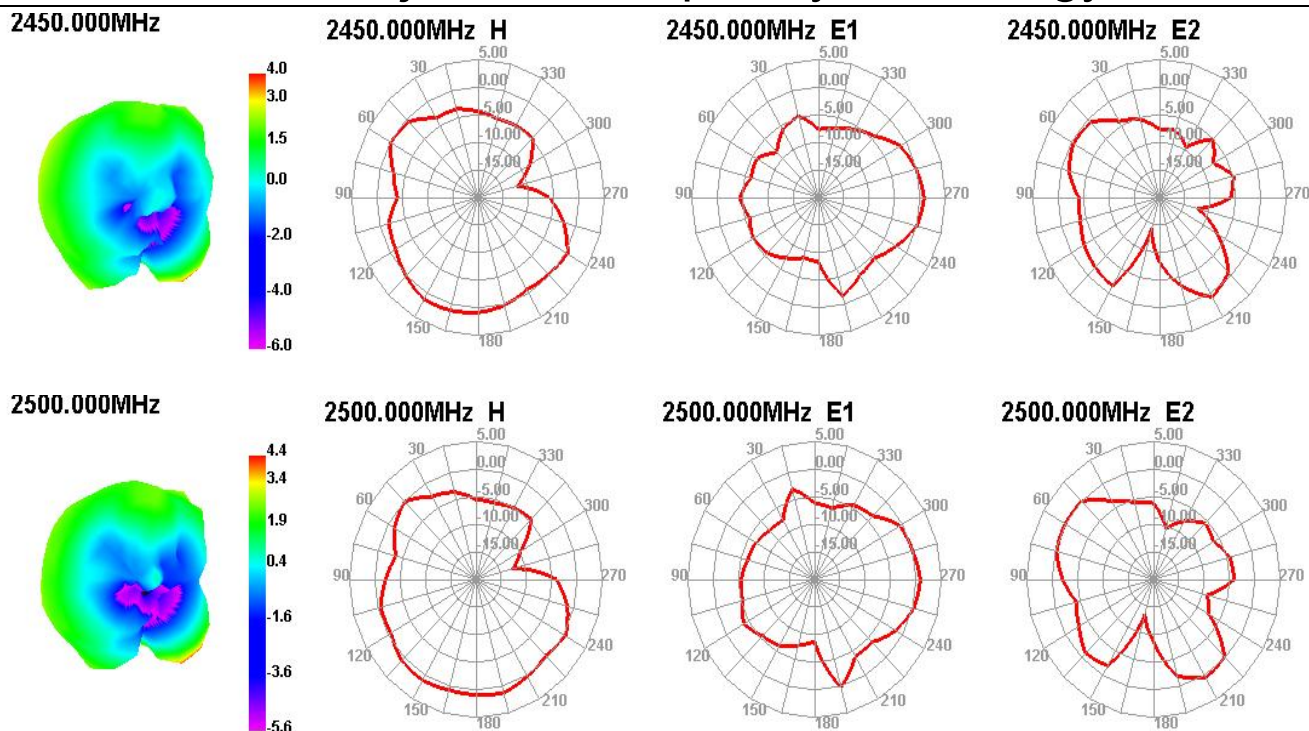

6. Reliability Test




Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp. & Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp. & Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3	Salt-Spray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: 35±2℃ Humidity: 85% NaCl salt spray : 5±1%. PH value : 6.5~7.2 Test time: 24 hours	Salt-Spray Tester	No color change No appear rusting	PASS

7. Assemble type



Chart 3 Antenna assemble type(overall)

8.Product Drawing

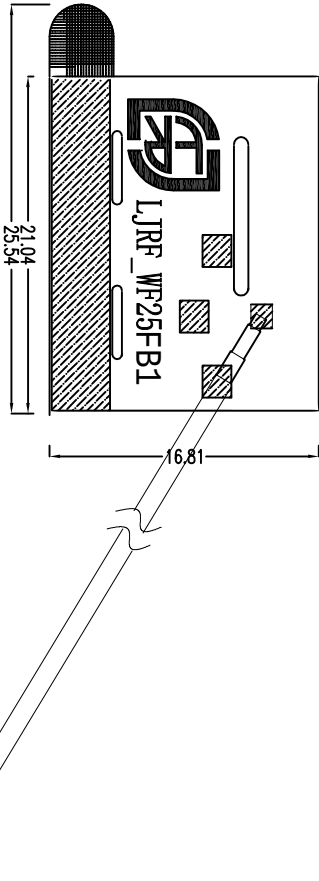

- Remark:
- 1.FPC material:Electrolytic copper.
 - 2.Backing in behind:3M300LSE.
 - 3.Tolerance: Cutting die:±0.1mm;Circuit on FPC:±0.05mm; others are ±0.05mm.
 - 4.ROHS:(Pb,Hg,Cr+6,PBBs,PBDEs)<1000ppm; Cd,<100ppm.

LEJIN

深圳乐进射频科技有限公司

SHEN ZHEN LEJIN RADIO FREQUENCY CO., LTD

D				D			
A				New drawing			
Rev				Description			
1				2			
				3			
				4			
				Date			
				Remark			
				5			
				6			
				7			
				8			