

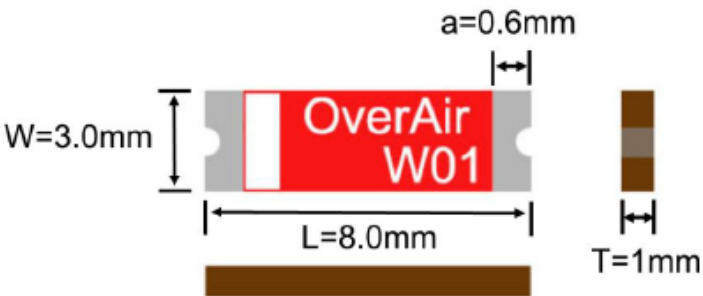
OTA 天线测试报告

Antenna	Internal Antenna
Manufacturer: Address:	Shenzhen Trolink Technology Co., Ltd Floor 5, Block E, Fenda High-Tech Park, Sanwei Community, Hangcheng Street, Bao'an Distict, Shenzhen, Guangdong, China
测试条件 Test Conditions	常温环境下温度：21℃， 湿度：50%RH Humidity：50%,Temperature：21℃,
测试设备 Test Equipment	SATIMO-OTA 实验室；CMW500；MT8000；E5071C 等 SATIMO-OTA Lab,
测试环境 Test Ambient	温度(Temperature):____25____℃ 湿度(Humidity):____40____RH
判定标准 Decision criteria	见下表 TRP/TIS 故障判定标准 Look at the table of TRP and TIS

External View Drawing

Antenna Photo & Length (mm)

DIMENSIONS

Figure	Symbol	Dimension(mm)
	L	8.0±0.1
	w	3.0±0.1
	T	1.0±0.1
	a	0.6±0.1

BT/2.4GWIFI			
Passive Test For 2.4G			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	27.01	-5.69	0.44
2410	28.9	-5.39	0.8
2420	28.97	-5.38	0.68
2430	28.36	-5.47	0.51
2440	27.27	-5.64	0.19
2450	24.87	-6.04	-0.48
2460	23.77	-6.24	-1.03
2470	22.39	-6.5	-1.55
2480	22.04	-6.57	-1.85
2490	22.28	-6.52	-1.93
2500	22.05	-6.57	-2.08

