

深圳市肯特新工业技术有限公司
肯 特 科 技(香港)有 限 公 司

承 認 書

SPECIFICATION FOR APPROVAL

客 戶： 創凌智联

Customer

項目名： 2. 4G 外置膠棒天線

Project

品 名： WIFI 外置天線

Description

料 號： E8002A-B1W0G-025-B

Part Number

日 期： 2024 年 12 月 18 日

Date Year Month Day

承 認 人 簽 章

Signature

制定 Responsible

審核 Approve

客戶確認 Confirm

Contact: 13828735890
TEL: +86-755-23993790

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ±1 X.X = ±0.1 X.XX = ±0.01

ANGLES = ± HOLE DIA = ±

SCALE :

UNIT : mm

DRAWN BY : 王浩

CHECKED BY : 方坤华

DESIGNED BY : 李元豪

APPROVED BY : 易珂湘

TITLE : E8002A-B1W0G-025-B Specification

DOCUMENT
NO.

PAGE REV.
P0

PAGE OF






肯特新工业技术有限公司
Kinter New Industrial Technology CO., LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINTER NEW INDUSTRIAL TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION.


电器技术参数

电 性 能 指 标		Electrical Specifications	
频率范围	2400-2500MHZ	Frequency Range	2400-2500MHZ
电压驻波比	≤2.0	VSWR	≤2.0
增益	2DBI	GAIN	2DBI
输入阻抗	50 Ω	Input Impedance	50 Ω
机 械 指 标		Mechanical Specifications	
天线颜色	黑色	Antenna Color	BLACK
接口形式	CABLE	Input connector	CABLE
天线长度	25mm	Cable length	25mm
工作温度	-40℃ ~+85℃	Working Temperature	-40℃ ~+85℃
工作湿度	20~80%	Working Humidity	20~80%

产品图片(Sample Picture):

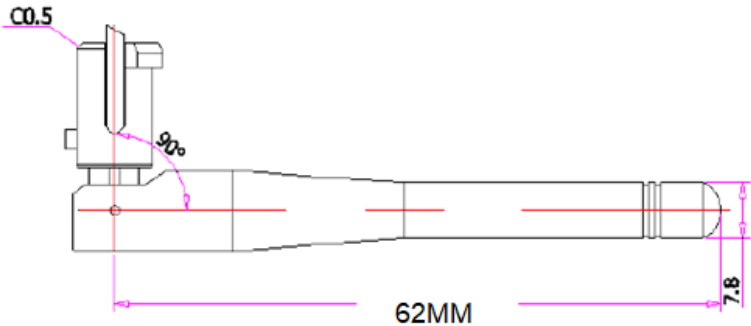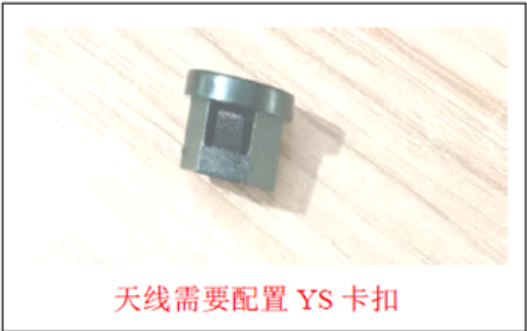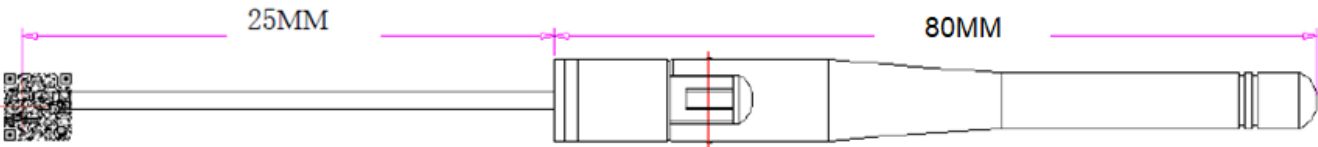




网络分析测试(SWR):

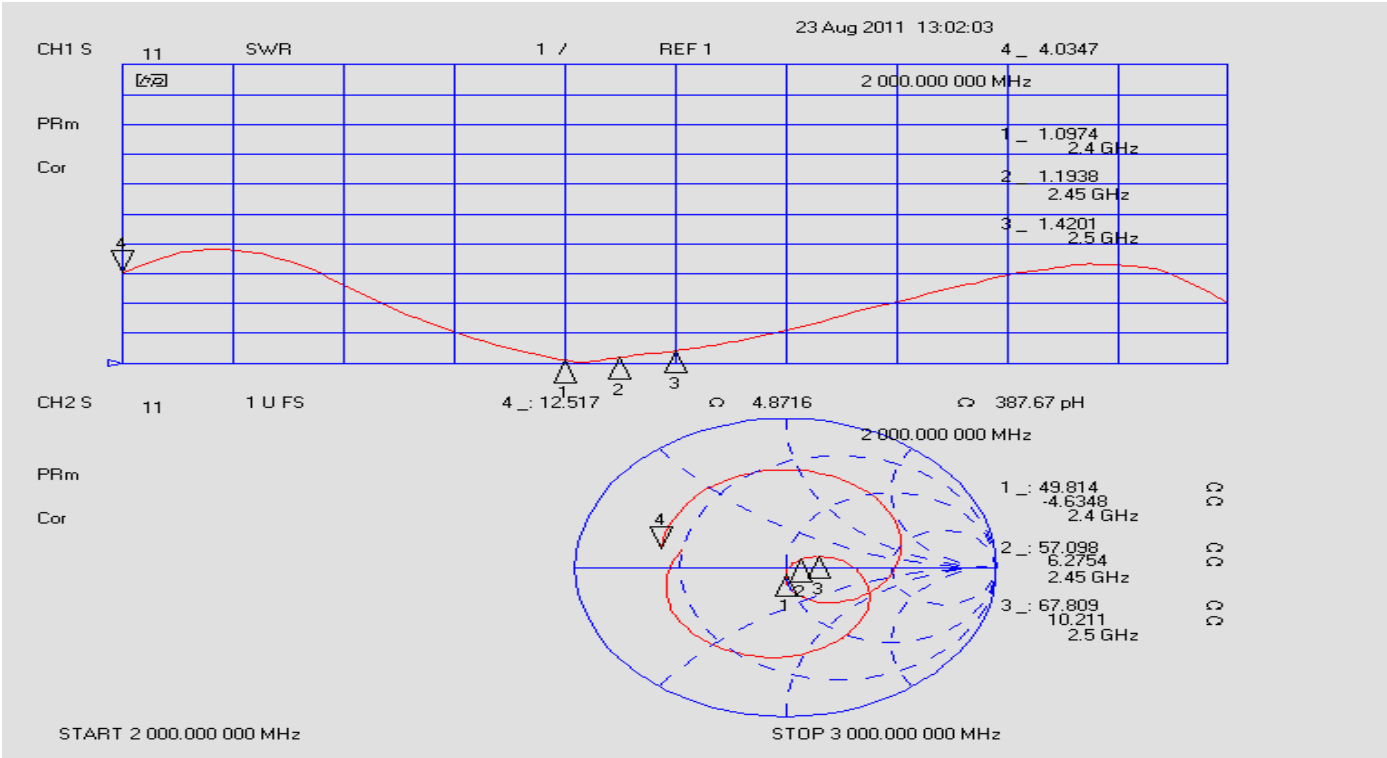


增益测试(dBi):

● 测试项目与设备


	测试项目	设备
1. S参数	1. 回波损耗 2. 驻波比	网络分析仪: Agilent E5071B
2. 耦合功率测试	1. 发射功率 2. 接收灵敏度	GSM 测试仪: Agilent 8960 E5515C LTE /WIFI/BT测试仪: R&S CMW500
3. 辐射模式与增益	1. 辐射模式 2. 天线增益	1. 暗室: 8x4x4 m (3D) 2. 网络分析仪: Agilent E5071B

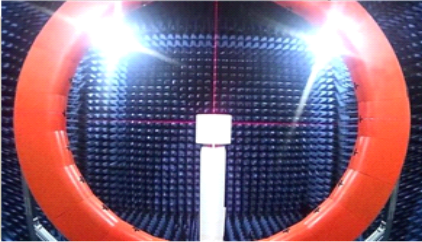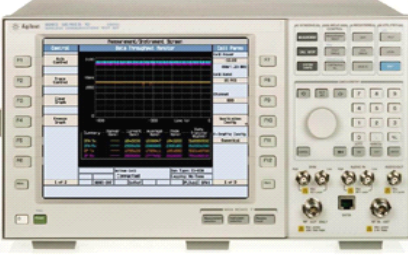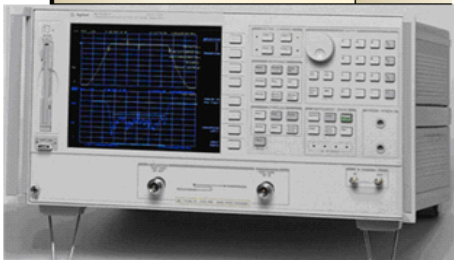

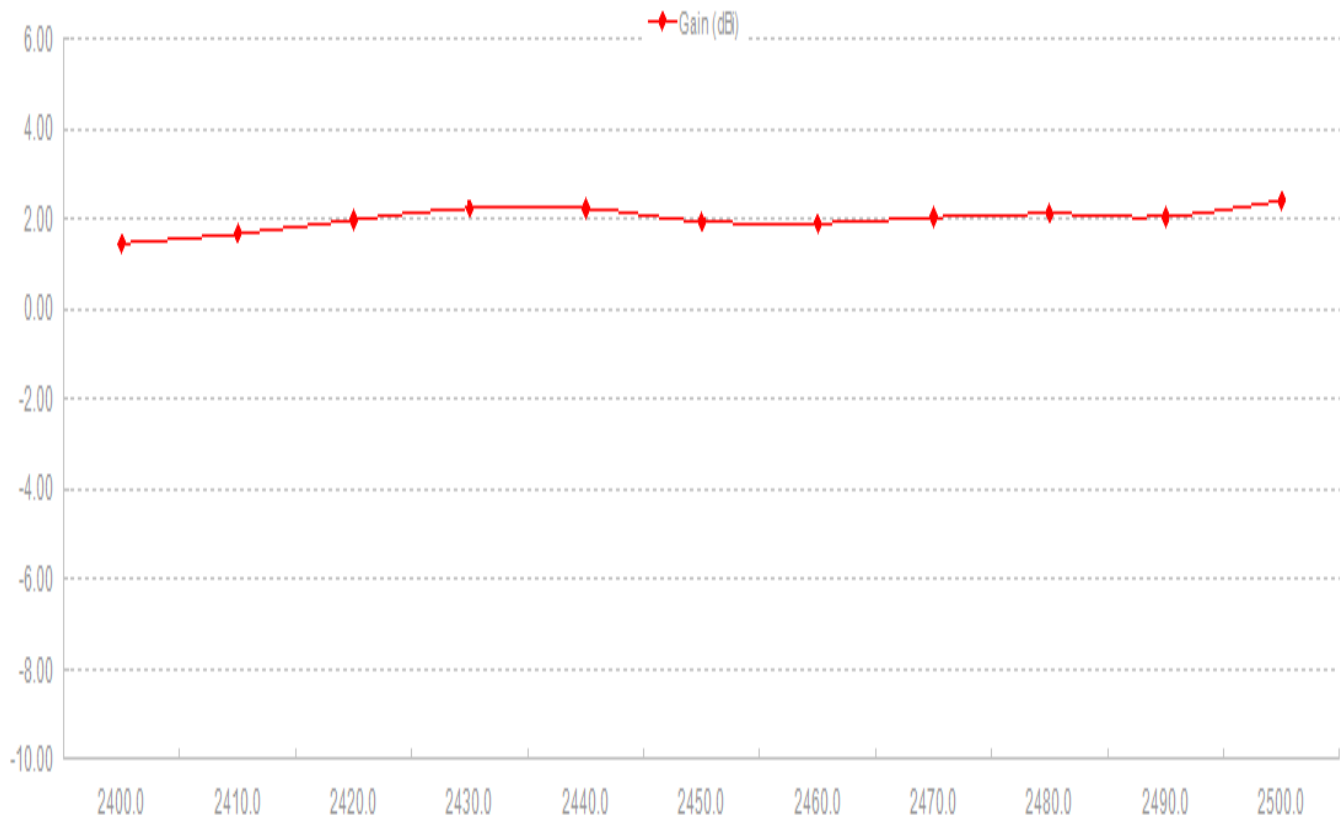


Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Point Values											
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.69	-2.52	-2.23	-2.04	-1.95	-2.28	-2.44	-2.49	-2.60	-2.83	-2.45
Peak EIRP (dBm)	1.46	1.67	1.98	2.24	2.24	1.94	1.91	2.04	2.12	2.05	2.41
Directivity (dBi)	4.15	4.19	4.21	4.28	4.19	4.22	4.36	4.52	4.72	4.87	4.86
Efficiency (dB)	-2.69	-2.52	-2.23	-2.04	-1.95	-2.28	-2.44	-2.49	-2.60	-2.83	-2.45
Efficiency (%)	53.80	56.00	59.80	62.50	63.80	59.20	57.00	56.40	55.00	52.20	56.90
Gain (dBi)	1.46	1.67	1.98	2.24	2.24	1.94	1.91	2.04	2.12	2.05	2.41
NHPRP $\pm$ Pi/4 (dBm)	-3.69	-3.36	-2.92	-2.52	-2.55	-2.92	-3.24	-3.47	-3.56	-3.59	-2.96
NHPRP $\pm$ Pi/6 (dBm)	-4.35	-4.03	-3.59	-3.20	-3.23	-3.60	-3.92	-4.14	-4.22	-4.26	-3.65
NHPRP $\pm$ Pi/8 (dBm)	-4.96	-4.64	-4.21	-3.82	-3.85	-4.21	-4.53	-4.75	-4.83	-4.88	-4.29
Upper Hem. PRP (dBm)	-5.17	-4.93	-4.58	-4.35	-4.22	-4.52	-4.66	-4.67	-4.76	-4.96	-4.55
Lower Hem. PRP (dBm)	-6.30	-6.22	-6.01	-5.89	-5.85	-6.22	-6.43	-6.51	-6.65	-6.93	-6.61
Upper Hem. PRP (%)	30.38	32.14	34.79	36.77	37.80	35.31	34.18	34.09	33.41	31.88	35.06
Lower Hem. PRP (%)	23.45	23.85	25.03	25.78	26.03	23.90	22.78	22.33	21.60	20.29	21.82


2400.000MHz

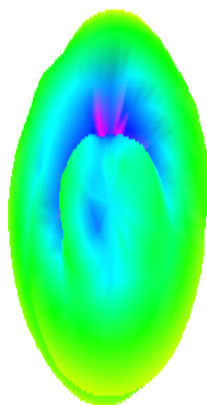


2400.000MHz H

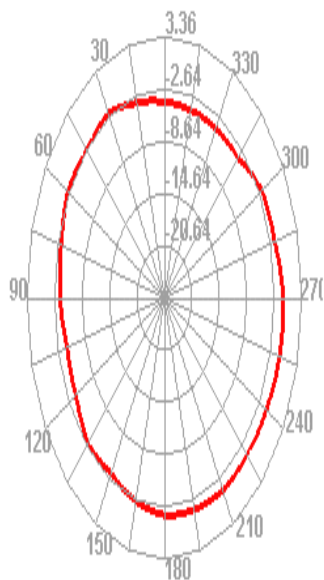


2400.000MHz E1

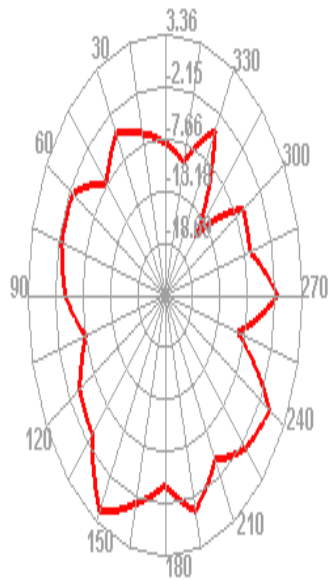


2400.000MHz E2

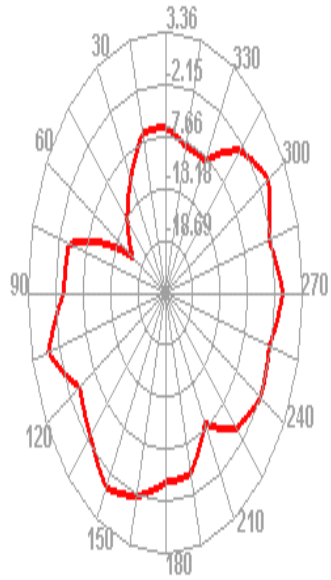


2500.000MHz




2500.000MHz H

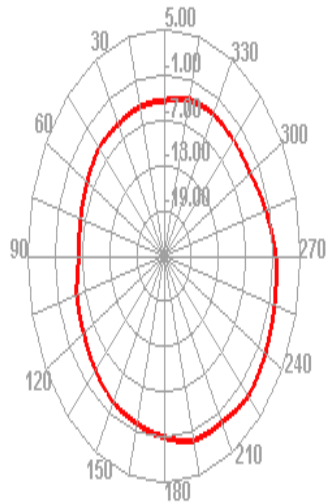

2500.000MHz E1

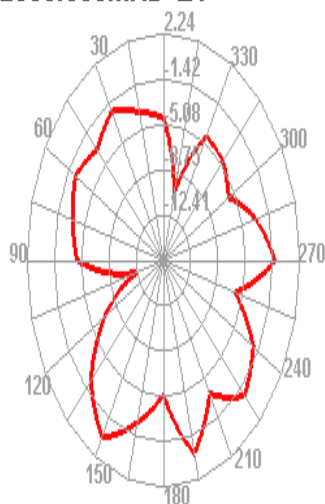

2500.000MHz E2

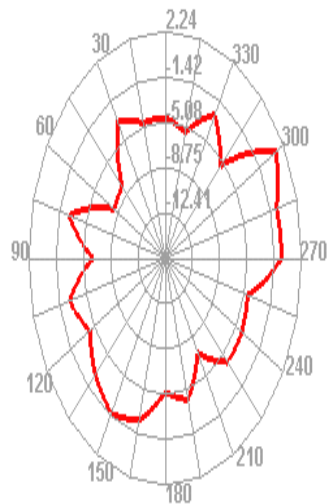

环境性能测试（Environmental performance test）：

ITEM	TEST CONDITION	TEST RESULT
The storage environment	In the absence of the specified circumstances test temperature, humidity, air pressure is as follows: 1 temperature is -30 °C ~ +80 °C 2 relative humidity for 45%-85% The 3 pressure is 86kpa-106kpa	Electrical and mechanical properties of normal
Thermocycling ;	5 cycles between 70 °C and 40 °C, then under normal conditions 1-2H, appearance quality inspection.	Dimensions should meet the requirements and shall satisfy In the mechanical, electrical properties
Resistance to damp heat Test	Relative humidity is 95 ± 3%, test temperature: 40 °C. Continue after 2H, Test within the product after removing the 5min determination of the electrical properties, in the normal sample Under 1-2H, the appearance of quality inspection	Dimensions should meet the requirements and shall satisfy In the mechanical, electrical properties
vibration test ;	Displacement amplitude of vibration frequency range: 10-55HZ, 0.35MM, the amplitude of acceleration: 50.0M/S, sweep cycle times: 30 times	Electrical and mechanical properties of normal
fall-down test ;	1M high altitude in accordance with the perpendicular axis free fall 3	Electrical and mechanical properties of normal

